



surge extension lead

SURGE



POWER

protects your valuable equipment from damaging surges & spikes

FEATURES

- Plug eight items safely into one socket
- Protects valuable electrical equipment from surges and spikes
- £1000 connected equipment warranty
- Compact design
- Power and surge indicators
- Wall fixing capability
- Non-rewireable




PRODUCT IMAGES



SRG8xN

LINE DIAGRAMS

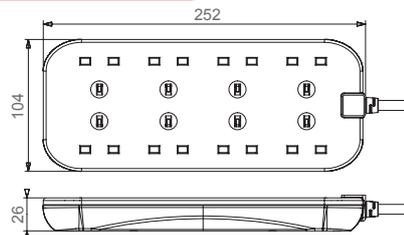

PRODUCT INFORMATION

Part Number	SRG8xN
Part Number Note	x = length of cable in metres
Product Dimensions	Height 26mm x Width 268.2mm x Depth 100mm
Sockets	8

TECHNICAL SPECIFICATIONS

Standard(s)	This product is certified to applicable British safety standards BS1363-2	
Wall Mounting Option	Yes	
Maximum Load (Wattage)	13A: 3120 Watts, 250 Volts	
IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN		

SURGE TECHNICAL DATA

Protection	2 x MOV + GDT
Maximum Surge Energy	370 Joules
Maximum Surge Current	12,000 Amps
Clamping Voltage	925 Volts
Response Time	<25nS
3 Channel Protection	Yes
Thermal Cutout	Yes
Surge Neon Indicator	Yes

SAFETY WARNING

PLEASE READ CAREFULLY AND USE IN ACCORDANCE WITH OUR SAFETY INSTRUCTIONS BELOW

- ✓ DO Uncoil cable before use
- ✓ DO Position the cable carefully to avoid accidents
- ✗ DON'T Use in wet conditions
- ✗ DON'T Allow heavy tools etc to hang unsupported on the cable or from the socket
- ✗ DON'T Remove the 13 amp plug and wire directly into a mains supply
- ✗ DON'T Exceed the total maximum load 13 amps = 3120 Watts 250 Volts a.c.

Masterplug Help Line
03300 249 279

Supplied by
Luceco PLC
Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at
www.masterplug.com

SURGE PROTECTION ADVICE

Important

This device is not a lightning arrester and will not protect equipment against lightning strikes.

Hundreds of power surges can occur in your home or office every day. The switching on/off of fluorescent lights and household appliances like refrigerators, washing machines and tumble dryers can cause power surges. Most new product warranties do not cover power surge damage. These surges and spikes can seriously damage electronic equipment. Even low energy surges can cause gradual component degradation leading to early hardware failure. Surges can cause computers to crash and corrupt software and data.

SURGE TECHNICAL DATA EXPLANATION

• Maximum Surge Energy Joules Rating (J)

A Joule is a unit of energy absorbed by a surge protector. The higher the Joules rating, the better the protection.

• Maximum Surge Current (A)

The maximum non-repetitive surge that can be discharged by the surge protector. The higher the amperage, the better the protection.

• Clamping Voltage (V)

This is the voltage level at which the surge protector cuts off the power surge. The lower the clamping voltage, the better the protection.

• Three Channel Protection

Masterplug SurgeGuard products protect all three channels - i.e. between live and neutral (L-N), neutral and earth (N-E) and live and earth (L-E). Many surge protectors do not have three electrical circuits for maximum protection.

• Safety Thermal Cut-Out

Repeated low surges over a period of years or one high surge can lead to the components in the surge protector degrading. This can lead to temperature rise and combustion. All Masterplug Surge Guard products have a safety thermal cut-out to protect against this eventuality. Don't compromise on safety - insist on a safety thermal cut-out.

• Surge 'Neon' Indicator

If the surge protector circuit fails, maybe as a result of discharging a maximum surge, you need to know so that the extension lead can be replaced. Many surge protectors have no indicator so it's impossible to tell if the connected equipment is actually protected! Being protected is being aware.

• Response Time (nS)

All Masterplug Surge Protectors respond in less than 25 nano seconds (=25 thousand millionths of a second) - fast enough to protect your equipment.

£1000 CONNECTED EQUIPMENT WARRANTY

Masterplug will replace ANY equipment damaged as result of a surge or spike that is connected to the mains via this product.

Register your warranty* at www.masterplug.com
(Terms & conditions apply, see website for more details)

* Warranty applicable in UK only

