








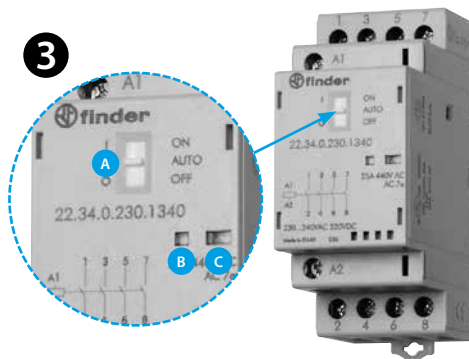
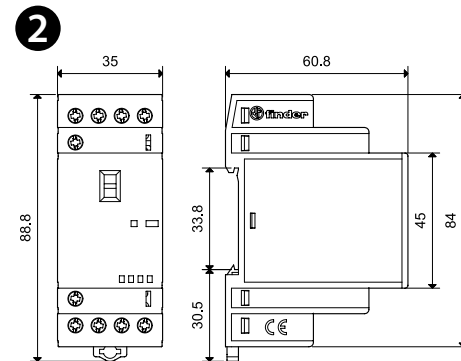
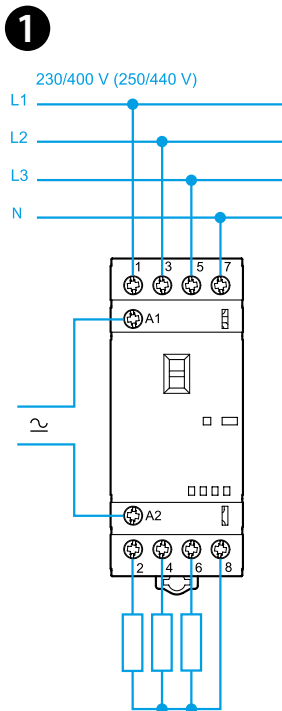




22.34

	<b>22.34.0.XXX.xxx0</b> $U_N$ (12 - 24 - 48 - 60 - 120 - 230)V AC (50/60 Hz) / DC $U_{min} - U_{max}$ : (0.8...1.1) $U_N$ $P$ 2 VA (50 Hz) / 2.2 W	
	 <b>22.34...x3x0</b>	 <b>22.34...x7x0</b>
	 <b>22.34...x6x0</b>	
	25 A 440 V AC (EN 61095)	
	AC1 / AC-7a (250 V AC)	6250 VA
	AC3 / AC-7b	10 A
	AC15 (230 V AC)	1800 VA
	 (400 - 440 V AC)	4 kW
	AC-7c	10 A ( <b>22.34...4xx0</b> )
	 (230 V AC)	800 W 2000 W ( <b>22.34...4xx0</b> )
	 (230 V AC)	300 W 800 W ( <b>22.34...4xx0</b> )
	CFL - LED	100 W 200 W ( <b>22.34...4xx0</b> )
		(-25...+50)°C
IP20		



## ENGLISH

### 22.34 MODULAR CONTACTOR 25 A

Contact gap  $\geq 3$  mm for NO contacts only. NC contacts  $\geq 1.5$  mm.  
Compliant with EN 61095: 2009.  
AC/DC silent coil (with varistor protection).

#### 1 CONNECTION DIAGRAM

#### 2 OUTLINE DRAWINGS

#### 3 FRONT VIEW

A = Selector (22.34.0.xxx.xx40)

The three-position manual selector has the following functions:

##### ON position

The contacts are latched in the operated state (NO contacts - closed and NC contacts - open), the mechanical indicator is visible in its window, the LED is not illuminated.

##### AUTO position

The state of contacts, mechanical indicator and LED follow the coil supply voltage.

##### OFF position

Even if terminals A1 - A2 are supplied with rated voltage, the coil is not energized, and so the contacts remain in the non-operated state, the mechanical indicator is not visible and the LED is not illuminated.

B = LED

C = Mechanical indicator

#### 4 ACCESSORIES

Auxiliary contact module available, "Quick assembly" with the main contactor 022.33/022.35.


##### OTHER DATA




It is suggested an air gap of 9 mm between adjacent relays for installations and working conditions close to the limit (that is, ambient temperature  $> 40$  °C, coil operated for a prolonged period of time, all contacts loaded with current  $> 20$  A).



- Open Type Device - Pollution degree 2 Installation Environment
- Maximum Surrounding Air Temperature 50°C
- Minimum distance among modular contactors 9 mm
- Field Wiring Terminals:  
Use 60/75°C copper conductor only and wire ranges  
No. 10-12-18-24 AWG, Solid only  
Terminal tightening torque 7.0 lb.in. (0.8 Nm)
- Suitable for use on a circuit capable of delivering not more than 5000 ARMS Symmetrical, 240 V AC, when protected by Listed Cartridge Fuses, rated K5 Class (No Current Limiting, Non-Time Delay, max 600 V AC, 30 A, 50 kA A.I.C.) or RK5 Class (Current Limiting, Time Delay, max 600 Vac, 15 A, 50 kA A.I.C.) or equivalent.
- For use in a circuit protected by Type1 or Type2 Surge Protective Devices with "Max Voltage Protection" rating of 3.7 kVpk and "Minimum Nominal Discharge Current" of 5 kA (at 6 kV).
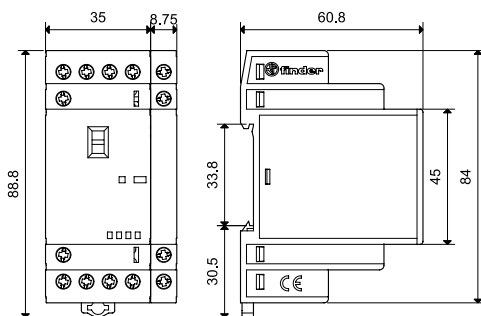
#### 4 22.34 + (022.33 / 022.35)



	13 23	13 21
	14 24	14 22
022.33		022.35
022.33	2 NO (DPST-NO)	
022.35	1 NO (SPST-NO) + 1NC (SPST-NC)	
	AC1	6 A
	AC15(230 V AC)	700 VA