


Inclinometers

Inclinometer MEMS / capacitive	IN81, 1- and 2-dimensional	Analog
---	-----------------------------------	---------------



The inclinometers of the IN81 series allow measuring 2-dimensional inclinations in the range of $\pm 85^\circ$ or 1-dimensional inclinations up to 360° .

With their high robustness, their protection level up to max. IP69k and their wide temperature range from -40°C to $+85^\circ\text{C}$, these devices are ideally suitable for outdoor use – e.g. for mobile automation applications.

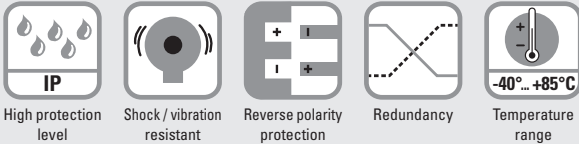

Robust

- High protection rating IP67 and IP69k in one device.
- Highest robustness thanks to metal housing.
- Stable accuracy over the whole temperature range from -40°C up to $+85^\circ\text{C}$.
- Non long-term drift thanks to sensor array technique.

Versatile

- Preset and teach function.
- Measuring direction 1- or 2-dimensional.
- With switch outputs.
- Stacked installation possible for redundancy.

Order code

8.IN81	.XXXX	.X2X
Type	a b c d	e f g

a Measuring direction

- 1 = 1-dimensional
- 2 = 2-dimensional

b Measuring range

- 1 = $\pm 10^\circ$ ¹⁾
- 2 = $\pm 15^\circ$ ¹⁾
- 3 = $\pm 30^\circ$ ¹⁾
- 4 = $\pm 45^\circ$ ¹⁾
- 5 = $\pm 60^\circ$ ¹⁾
- 6 = $\pm 85^\circ$ ¹⁾
- 7 = 0 ... 360° ($\pm 180^\circ$) ²⁾
- 8 = 0 ... 180° ($\pm 90^\circ$) ²⁾

c Interface

- 1 = 4 ... 20 mA / 12 bit
- 2 = 0.1 ... 4.9 V / 12 bit
- 3 = 0.5 ... 4.5 V / 12 bit
- 4 = 0 ... 5 V / 12 bit
- 5 = 0 ... 10 V / 12 bit

d Filter

- 1 = no filter
- 2 = filter value 0.1 Hz
- 3 = filter value 0.3 Hz
- 4 = filter value 0.5 Hz
- 5 = filter value 1.0 Hz
- 6 = filter value 2.0 Hz
- 7 = filter value 5.0 Hz
- 8 = filter value 10.0 Hz

e Optional switching outputs

- 1 = none
- 2 = 2 switch outputs ³⁾

f Supply voltage


- 2 = 10 ... 30V / 40 mA
- 15 ... 30 V for interface 5

g Type of connection

- 1 = 1 x M12 connector, 8-pin
- 2 = 1 x M12 connector, 5-pin
- 3 = 2 x M12 connector, 8-pin + 5-pin ⁴⁾

1) Can only be ordered in conjunction with measuring direction 2-dimensional.
 2) Can only be ordered in conjunction with measuring direction 1-dimensional.
 3) Can only be ordered in connection with type of connection 3.
 4) Can only be ordered in connection with option 2 switching outputs.

Inclinometers

Inclinometer MEMS / capacitive		IN81, 1- and 2-dimensional	Analog
Accessories			Order no.
Teach-Adapter 	for controlling the control inputs for the following functions:		8.0010.9000.0017
	<ul style="list-style-type: none"> - Preset (reference point setting) - Teaching (measuring range) - Filter setting - Switching points setting 		
Adapter plate	for installation identical to Kübler inclinometer IS40		8.0010.4062.0000
Cables and connectors			Order no.
Preassembled cables	M12 female connector with coupling nut, 8-pin, A coded, straight single ended 5 m [16.40'] PVC cable		05.00.6041.8211.005M
	M12 male connector with external thread, 5-pin, A coded, straight single ended 5 m [16.40'] PVC cable		05.00.6091.A411.005M
Connectors	M12 female connector with coupling nut, 8-pin, A coded, straight (metal)		05.CMB 8181-0
	M12 male connector with external thread, 5-pin, A coded, straight (metal)		8.0000.5111.0000

Further Kübler accessories can be found at: kuebler.com/accessories

Further Kübler cables and connectors can be found at: kuebler.com/connection-technology

Technical data			
Electrical characteristics current interface		Electrical characteristics voltage interface	
Supply voltage	10 ... 30 V DC	Supply voltage	0.1 ... 4.9 V / 0.5 ... 4.5 V / 0 ... 5 V 10 ... 30 V 0 ... 10 V 15 ... 30 V
Current consumption (no load)	max. 40 mA ¹⁾	Current consumption (no load)	max. 40 mA ¹⁾
Reverse polarity protection of the supply voltage	yes	Reverse polarity protection of the supply voltage	yes
PowerON Time (PowerOn until valid output value)	< 0.5 s	PowerON Time (PowerOn until valid output value)	< 0.5 s
Measuring axes	1 or 2	Measuring axes	1 or 2
Measuring range	1-dimensional 180° / 360° 2-dimensional max. ±85° (see order code)	Measuring range	1-dimensional 180° / 360° 2-dimensional max. ±85° (see order code)
Resolution	internal sensor 0,01° D/A converter 12 bit	Resolution	0 ... 5 V / 0 ... 10 V 12 bit 0.1 ... 4.9 V / 0.5 ... 4.5 V 11 bit
Accuracy at 25 °C ²⁾	1-dimensional typ. ±0.5° 2-dimensional typ. ±1.0°	Accuracy at 25 °C ⁴⁾	1-dimensional typ. ±0.5° 2-dimensional typ. ±1.0°
Repeat accuracy	±0.2°	Repeat accuracy	±0.2°
Transverse sensitivity ³⁾	typ. ±0.3°	Transverse sensitivity ³⁾	typ. ±0.3°
Temperature coefficient	1-dimensional typ. ±0.005 % / K 2-dimensional typ. ±0.015 % / K	Temperature coefficient	1-dimensional typ. ±0.0015 % / K 2-dimensional typ. ±0.005 % / K
Output load	at 10 VDC max. 200 Ohm at 24 VDC max. 900 Ohm at 30 VDC max. 1200 Ohm	Output load	max. 10 mA
Setting time	< 1 ms (R _{Burden} = 900 Ohm, 25 °C)	Setting time	< 1 ms (R _{Burden} = 1000 Ohm, 25 °C)
Sampling rate	50 Hz (20 ms)	Sampling rate	50 Hz (20 ms)
Limit frequency with Butterworth filter	0.1 ... 10 Hz, 8th order	Limit frequency with Butterworth filter	0.1 ... 10 Hz, 8th order

1) Max. 270 mA under full load on both switching outputs.

2) Over the whole temperature and max. measuring range; 1 dim ≤ ±1.9°, 2 dim ≤ ±2.3°.

3) Only for 2-dimensional measuring direction.

4) Over the whole temperature and max. measuring range; 1 dim ≤ ±0.8°, 2 dim ≤ ±1.2°.

A full description of the technical data can be found in the relevant product manual at www.kuebler.com.

Inclinometers

Inclinometer MEMS / capacitive	IN81, 1- and 2-dimensional	Analog
---	-----------------------------------	---------------

Mechanical characteristics		
Connection	1 x M12 connector	8-pin, male connector
	1 x M12 connector	5-pin, female connector
	2 x M12 connector	8-pin, male / 5-pin, female connector
Weight	approx. 185 g [6.53 oz]	
Protection acc. to EN 60529	IP67 + IP69k ¹⁾	
Working temperature range	-40 °C ... +85 °C [-40 °F ... +185 °F]	
Material	housing	aluminum
Shock resistance acc. to EN 60068-2-27	1000 m/s ² , 6 ms	
Vibration resistance acc. to EN 60068-2-6	100 m/s ² , 10 ... 2000 Hz	
Dimensions	80 x 60 x 23 mm [3.15 x 2.36 x 0.91"]	

EMC		
Relevant standards	EN 61326-1	Electrical equipment for measurement, control and laboratory use
	EN 61000-6-2	Immunity for industrial environments
	EN 55011 Klasse B, EN 61000-6-3	Emitted interferences for residential environments
	EN ISO 14982	Agricultural and forestry machinery, electromagnetic compatibility, test methods and acceptance criteria ²⁾
	EN 13309	Construction machinery - Electromagnetic compatibility of machines with internal supply voltage ²⁾

Control inputs

Functions: Preset (reference point setting)
Teaching (measuring range)
Filter setting
Switching points setting

Switch output

optional: 2 switch outputs

Electrical characteristics		
Input	active HIGH	
Signal level	High	min. 60% of +V, max. +V
	Low	max. 30% of +V
Min. pulse duration	+V for min. 1 s	

Electrical characteristics		
Permissible load	max. 100 mA	
Signal level (under max. load)	High	min. +V - 3.0 V
	Low	max. 0.5 V
Short circuit proof outputs	yes	

Approvals		
E1 compliant in accordance with	ECE guideline	
UL compliant in accordance with ¹⁾	File no. E224618	
CE compliant in accordance with	EMC Directive	2014/30/EU
	RoHS Directive	2011/65/EU
UKCA compliant in accordance with	EMC Regulations	S.I. 2016/1091
	RoHS Regulations	S.I. 2012/3032

1) The IP protection class is not UL-tested. Verified by Kübler.

2) Without pulse 5.

Inclinometers

Inclinometer
MEMS / capacitive


IN81, 1- and 2-dimensional

Analog

Course of the output signal – factory setting


1-dimensional sensor

Example with a measuring range of 360°

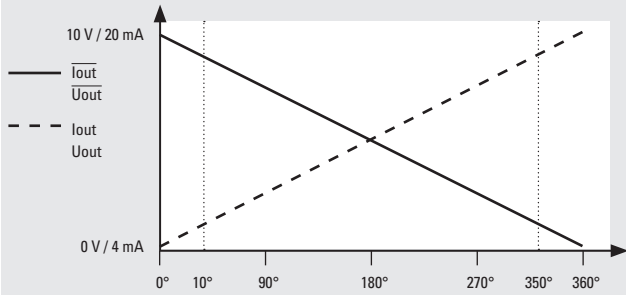


Optional with 2 switching outputs

(factory setting can be changed via the teach-function)

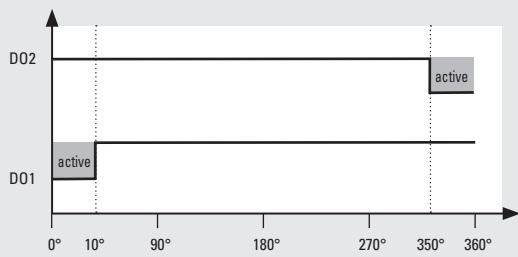


2-dimensional sensor

Example with a measuring range of ±85°

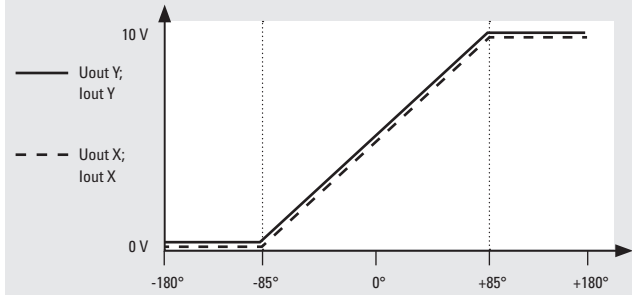

Optional with 2 switching outputs

(factory setting can be changed via the teach-function)

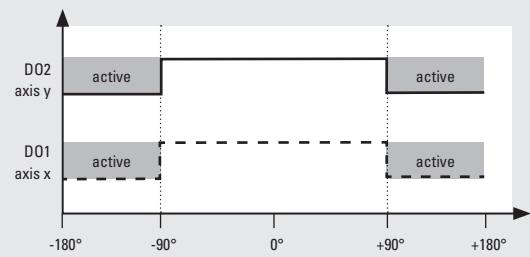

Inclinometers

Inclinometer MEMS / capacitive	IN81, 1- and 2-dimensional	Analog
---	-----------------------------------	---------------

Terminal assignment, 1 dimensional

Type of connection	M12 connector, 8-pin									
1	Signal – Interface 1 (current):	0 V	+V	Iout+	Iout-	Iout+	Iout-	Teach 1	Teach 2	
	Signal – Interface 2, 3, 4, 5 (voltage):	0 V	+V	Uout+	Uout-	Uout+	Uout-	Teach 1	Teach 2	
	Pin:	1	2	3	4	5	6	7	8	
Type of connection	M12 connector, 5-pin									
2	Signal – Interface 1 (current):	+V	Iout+	0 V	Iout+	Teach				
	Signal – Interface 2, 3, 4, 5 (voltage):	+V	Uout+	0 V	Uout+	Teach				
	Pin:	1	2	3	4	5				
Type of connection	M12 connector, 8-pin									
3	Signal – Interface 1 (current):	0 V	+V	Iout+	Iout-	Iout+	Iout-	Teach 1	Teach 2	
	Signal – Interface 2, 3, 4, 5 (voltage):	0 V	+V	Uout+	Uout-	Uout+	Uout-	Teach 1	Teach 2	
	Pin:	1	2	3	4	5	6	7	8	
Switching outputs option – M12 connector, 5-pin										
Signal:	n.c.	DO1	DO2	n.c.	0 V					
Pin:	1	2	3	4	5					

Terminal assignment, 2 dimensional

Type of connection	M12 connector, 8-pin									
1	Signal – Interface 1 (current):	0 V	+V	Iout+ X	Iout- X	Iout+ Y	Iout- Y	Teach 1	Teach 2	
	Signal – Interface 2, 3, 4, 5 (voltage):	0 V	+V	Uout+ X	Uout- X	Uout+ Y	Uout- Y	Teach 1	Teach 2	
	Pin:	1	2	3	4	5	6	7	8	
Type of connection	M12 connector, 5-pin									
2	Signal – Interface 1 (current):	+V	Iout+ Y	0 V	Iout+ X	Teach				
	Signal – Interface 2, 3, 4, 5 (voltage):	+V	Uout+ Y	0 V	Uout+ X	Teach				
	Pin:	1	2	3	4	5				
Type of connection	M12 connector, 8-pin									
3	Signal – Interface 1 (current):	0 V	+V	Iout+ X	Iout- X	Iout+ Y	Iout- Y	Teach 1	Teach 2	
	Signal – Interface 2, 3, 4, 5 (voltage):	0 V	+V	Uout+ X	Uout- X	Uout+ Y	Uout- Y	Teach 1	Teach 2	
	Pin:	1	2	3	4	5	6	7	8	
Switching outputs option – M12 connector, 5-pin										
Signal:	n.c.	DO1	DO2	n.c.	0 V					
Pin:	1	2	3	4	5					

+V:	Supply voltage +V DC	Uout+ X	X axis voltage output	Iout+ X	X axis current output
0V	Supply voltage ground GND (0 V)	Uout- X	X axis voltage output GND	Iout- X	X axis current output GND
Teach 1	Input 1 for various teaching functions	Uout+ Y	Y axis voltage output	Iout+ Y	Y axis current output
Teach 2	Input 2 for various teaching functions	Uout- Y	Y axis voltage output GND	Iout- Y	Y axis current output GND
DO1	Digital output 1	1-axis version			1-axis version
DO2	Digital output 2	Uout+	Voltage output	Iout+	Current output
		Uout-	Voltage output GND	Iout-	Current output GND
		Iout+	Inverted voltage output	Iout+	Inverted current output
		Uout-	Inverted voltage output GND	Iout-	Inverted current output GND

Inclinometers


**Inclinometer
MEMS / capacitive**

IN81, 1- and 2-dimensional


Analog

Direction of inclination

1-dimensional

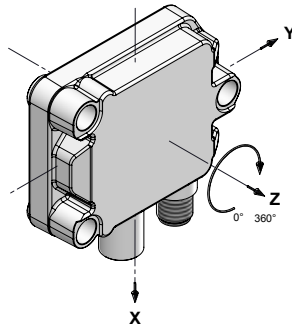

2-dimensional

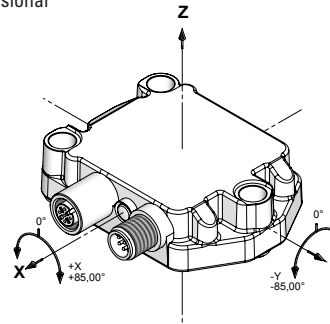

Dimensions

Dimensions in mm [inch]

1 x M12 connector 8-pin, male contacts

1 x M12 connector 8-pin, male contacts

1 x M12 connector 5-pin, female contacts

