

1607431

https://www.phoenixcontact.com/gb/products/1607431

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Contact insert set, Range of articles: VARIOCON, design: VC4, number of positions: 40, min. conductor cross section: 0.14 mm<sup>2</sup>, max. conductor cross section: 1.5 mm<sup>2</sup>, rated voltage: 160, rated current: 10 A, Contact connection type: Pin, Connectors may only be connected/disconnect ed when under no load.



### Your advantages

- Proven COMBICON technology
- · Universal connection
- · Can be keyed to prevent incorrect connection

#### Commercial data

| Item number                          | 1607431            |
|--------------------------------------|--------------------|
| Packing unit                         | 5 pc               |
| Minimum order quantity               | 5 pc               |
| Sales key                            | ABLADB             |
| Product key                          | ABLADB             |
| Catalog page                         | Page 24 (C-2-2013) |
| GTIN                                 | 4017918941147      |
| Weight per piece (including packing) | 70.82 g            |
| Weight per piece (excluding packing) | 70.82 g            |
| Customs tariff number                | 85366990           |
| Country of origin                    | PL                 |



1607431

https://www.phoenixcontact.com/gb/products/1607431

## Technical data

### Notes

| General     | Connectors may only be connected/disconnected when under no load.  |
|-------------|--|
| Safety note |  |
| Safety note | WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.   |
|             | <ul> <li>WARNING: Commission properly functioning products only.         The products must be regularly inspected for damage.         Decommission defective products immediately. Replace damaged products. Repairs are not possible.     </li> </ul>   |
|             | <ul> <li>WARNING: Only electrically qualified personnel may install and<br/>operate the product. They must observe the following safety<br/>notes. The qualified personnel must be familiar with the basics of<br/>electrical engineering. They must be able to recognize and<br/>prevent danger. The relevant symbol on the packaging indicates<br/>that only personnel familiar with electrical engineering are<br/>allowed to install and operate the product.</li> </ul> |
|             | <ul> <li>The products are suitable for applications in plant, controller,<br/>and electrical device engineering.</li> </ul>  |
|             | <ul> <li>When operating the connectors in outdoor applications, they<br/>must be separately protected against environmental influences.</li> </ul>   |
|             | <ul> <li>Assembled products may not be manipulated or improperly opened.</li> </ul>  |
|             | <ul> <li>Only use mating connectors that are specified in the technical<br/>data of the standards listed (e.g. the ones listed in the product<br/>accessories online at phoenixcontact.com/products).</li> </ul>   |
|             | <ul> <li>When using the product in direct connection with third-party<br/>manufacturers, the user is responsible.</li> </ul>   |
|             | <ul> <li>For operating voltages &gt; 50 V AC, conductive connector<br/>housings must be grounded</li> </ul>  |
|             | <ul> <li>Ensure that the protective or functional ground has been properly connected.</li> </ul>   |
|             | <ul> <li>VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3<br/>are applicable when combining several circuits in a cable and/or<br/>connector</li> </ul>  |
|             | Observe the corresponding technical data. You will find information:     o On the product     o On the packing label     o In the supplied documentation     o Online at phoenixcontact.com/products under the product   |
|             | Only use tools recommended by Phoenix Contact  |
|             | <ul> <li>The installation notes/Design In documents online on the<br/>download page at phoenixcontact.com/products must be<br/>observed for this product.</li> </ul>   |
|             | <ul> <li>Use a protective cap to protect connectors that are not in use.</li> <li>The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products</li> </ul>  |
|             | Operate the connector only when it is fully plugged in.  |



1607431

https://www.phoenixcontact.com/gb/products/1607431


|  | <ul> <li>Ensure that when laying the cable, the tensile load on the<br/>connectors does not exceed the upper limit specified in the<br/>standards.</li> </ul>  |
|--|--|
|  | <ul> <li>Observe the minimum bending radius of the cable. Lay the<br/>cable without twisting it.</li> </ul>  |
|  | <ul> <li>The connector warms up in normal operation. Depending on the<br/>ambient conditions, the surface of the connector can continue to<br/>warm up. In this case, the user is responsible for posting<br/>warnings (e.g. DIN EN ISO 13732-1:2008-12).</li> </ul> |
| oduct properties   |  |
| Product type   | Contact insert   |
| Product family   | VARIOCON   |
| Series   | VC-D   |
| Туре   | VC4  |
| Number of positions  | 40   |
| Connection profile   | 39+PE  |
| Number of module slots   | 5  |
| Insulation characteristics   |  |
| Degree of pollution  | 2  |
| -  | 3  |
| ectrical properties  | 3  |
|  | 320 V  |
| ectrical properties  |  |
| ectrical properties  Rated voltage (II/2)  | 320 V  |
| ectrical properties  Rated voltage (II/2)  Rated voltage (III/2)   | 320 V<br>160 V   |
| ectrical properties  Rated voltage (II/2)  Rated voltage (III/2)   | 320 V<br>160 V<br>160 V  |
| Rated voltage (III/2) Rated voltage (III/2) Rated voltage (III/3)  | 320 V<br>160 V<br>160 V<br>160 V   |
| ectrical properties  Rated voltage (II/2)  Rated voltage (III/2)  Rated voltage (III/3)  Nominal voltage ATD   | 320 V<br>160 V<br>160 V<br>160 V   |
| Rated voltage (III/2) Rated voltage (III/2) Rated voltage (III/3)  Nominal voltage ATD Rated surge voltage   | 320 V<br>160 V<br>160 V<br>160 V<br>160<br>2.5 kV  |
| ectrical properties  Rated voltage (II/2)  Rated voltage (III/2)  Rated voltage (III/3)  Nominal voltage ATD  Rated surge voltage  Rated surge voltage (III/3)   | 320 V<br>160 V<br>160 V<br>160 V<br>160<br>2.5 kV  |
| Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3)  Nominal voltage ATD Rated surge voltage Rated surge voltage Rated surge voltage Rated surge voltage  | 320 V<br>160 V<br>160 V<br>160 V<br>160<br>2.5 kV<br>2.5 kV  |
| Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3)  Nominal voltage ATD Rated surge voltage Rated surge voltage Rated surge voltage Rated surge voltage  | 320 V<br>160 V<br>160 V<br>160 V<br>160<br>2.5 kV<br>2.5 kV<br>2.5 kV  |
| Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3)  Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3)  Rated surge voltage Rated current  Nominal voltage U <sub>N</sub>                       | 320 V<br>160 V<br>160 V<br>160 V<br>160<br>2.5 kV<br>2.5 kV<br>2.5 kV<br>10 A<br>10 A<br>10 A  |
| Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3)  Nominal voltage ATD Rated surge voltage                  | 320 V<br>160 V<br>160 V<br>160 V<br>160<br>2.5 kV<br>2.5 kV<br>10 A<br>10 A  |
| Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3)  Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3)  Rated surge voltage Rated current  Nominal voltage U <sub>N</sub>                       | 320 V<br>160 V<br>160 V<br>160 V<br>160<br>2.5 kV<br>2.5 kV<br>10 A<br>10 A<br>10 A<br>10 A  |
| Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3)  Nominal voltage ATD Rated surge voltage Nominal current  | 320 V<br>160 V<br>160 V<br>160 V<br>160<br>2.5 kV<br>2.5 kV<br>2.5 kV<br>10 A<br>10 A<br>10 A  |
| Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3)  Nominal voltage ATD Rated surge voltage Rated surge voltage Rated surge voltage Rated current  Nominal voltage U <sub>N</sub> Nominal current I <sub>N</sub> | 320 V 160 V 160 V 160 V 160 U 2.5 kV 2.5 kV 10 A 10 A 10 A 10 A 10 A   |

### **Dimensions**



1607431

https://www.phoenixcontact.com/gb/products/1607431

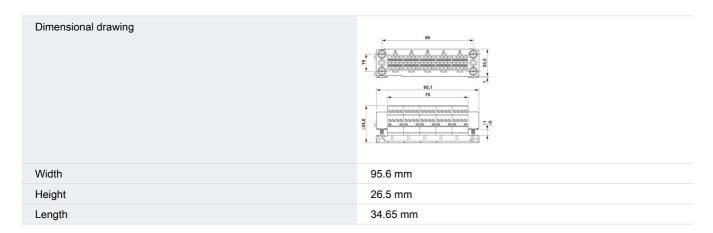

### Material specifications

| Color of the housing part              | gray                   |
|--|------------------------|
| Material Housing                       | PA 6.6                 |
| Material                               | PA (Panel-mount frame) |
| Material Contact carrier               | PA 6.6                 |
| Material Contact                       | CuMg                   |
| Flammability rating according to UL 94 | V0                     |
| Insulating material group              | I / CTI 600            |
| Contact surface material               | tin-plated             |

### Cable/line

| Single wire, cross section              | 0.14 mm² 1.5 mm² |
|---|------------------|
| Stripping length of the individual wire | 7 mm             |
| Halogen-free                            | no               |

### Mechanical properties

| Mac | hanical | ctch l |
|-----|---------|--------|

| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|-------|

### Environmental and real-life conditions

### Ambient conditions

| Ambient temperature (operation) | -40 °C 100 °C |
|---------------------------------|---------------|




1607431

https://www.phoenixcontact.com/gb/products/1607431

## Drawings

### Dimensional drawing

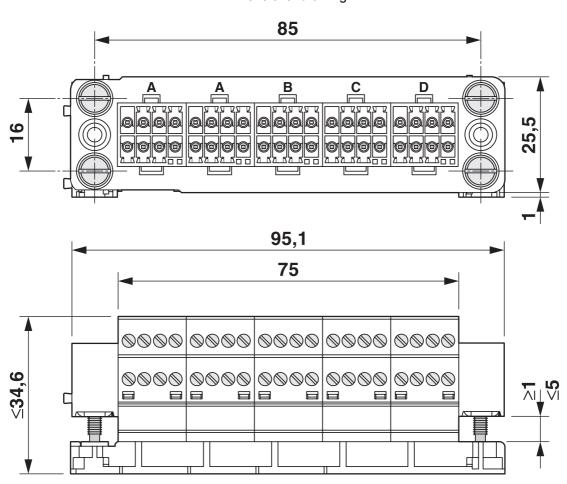


Contact insert



1607431

https://www.phoenixcontact.com/gb/products/1607431

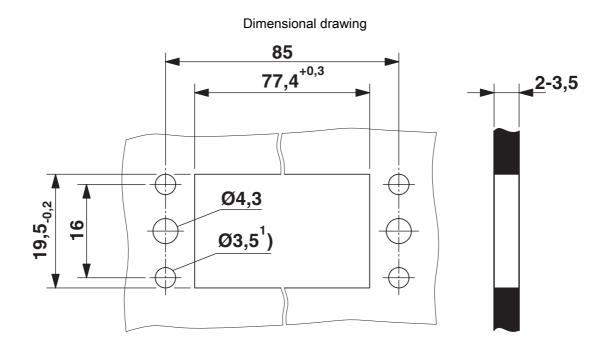



1607431

https://www.phoenixcontact.com/gb/products/1607431

## Classifications

|                | ECLASS-13.0 | 27440192 |  |
|----------------|-------------|----------|--|
| E <sup>-</sup> | ETIM        |          |  |
|                | ETIM 9.0    | EC003557 |  |
| UNSPSC         |             |          |  |
|                | UNSPSC 21.0 | 39121400 |  |



1607431

https://www.phoenixcontact.com/gb/products/1607431

## Environmental product compliance

#### EU RoHS

| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
|---|--|
| China RoHS                              |  |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|   | No hazardous substances above the limits |
| EU REACH SVHC                           |  |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Halesfield 13, Telford Shropshire, TF7 4PG 01952 681700 info@phoenixcontact.co.uk