

SIRIUS soft starter 200-480 V 63 A, 110-250 V AC Screw terminals
Analog output



| | |
|--------------------------------------|--|
| Product brand name | SIRIUS |
| Product category | Hybrid switching devices |
| Product designation | Soft starter |
| Manufacturer's article number | <ul style="list-style-type: none"> • of HMI module usable 3RW5980-0HS00 • of HMI-Modul high-feature usable 3RW5980-0HF00 • of communication module PROFINET standard usable 3RW5980-0CS00 • of communication module PROFIBUS usable 3RW5980-0CP00 • of communication module Modbus TCP usable 3RW5980-0CT00 • of circuit breaker usable at 400 V 3VA2163-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10 • of circuit breaker usable at 500 V 3VA2163-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10 • of circuit breaker usable at 400 V at inside-delta circuit 3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10 • of circuit breaker usable at 500 V at inside-delta circuit 3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10 • of the gG fuse usable up to 690 V 3NA3830-6; Type of coordination 1, Iq = 65 kA • of the gG fuse usable at inside-delta circuit up to 500 V 3NA3830-6; Type of coordination 1, Iq = 65 kA |

- of full range R fuse link for semiconductor protection usable up to 690 V
- of back-up R fuse link for semiconductor protection usable up to 690 V

[3NE1022-0; Type of coordination 2, Iq = 65 kA](#)

[3NE8024-1; Type of coordination 2, Iq = 65 kA](#)

General technical data

| | |
|---|--|
| Starting voltage [%] | 30 ... 100 % |
| Start-up ramp time of soft starter | 0 ... 20 s |
| Current limiting value [%] adjustable | 130 ... 700 % |
| Product component | |
| • is supported HMI-Standard | Yes |
| • is supported HMI-High Feature | Yes |
| Product feature integrated bypass contact system | Yes |
| Number of controlled phases | 3 |
| Trip class | CLASS 10A (default) / 10E / 20E; acc. to IEC 60947-4-2 |
| Insulation voltage | |
| • rated value | 600 V |
| Impulse voltage rated value | 6 kV |
| Blocking voltage of the thyristor maximum | 1 400 V |
| Service factor | 1 |
| Surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation | |
| • between main and auxiliary circuit | 600 V |
| Protection class IP | IP00 |
| Usage category acc. to IEC 60947-4-2 | AC 53a |
| Shock resistance | 15 g / 11 ms, from 12 g / 11 ms with potential contact lifting |
| Reference code acc. to DIN EN 81346-2 | Q |
| Product function | |
| • ramp-up (soft starting) | Yes |
| • ramp-down (soft stop) | Yes |
| • Soft Torque | Yes |
| • Adjustable current limitation | Yes |
| • pump ramp down | Yes |
| • Intrinsic device protection | Yes |
| • motor overload protection | Yes; Electronic motor overload protection |
| • Evaluation of thermistor motor protection | No |
| • inside-delta circuit | Yes |
| • Auto-reset | Yes |
| • Manual RESET | Yes |
| • remote reset | Yes; By turning off the control supply voltage |
| • communication function | Yes |
| • via software configurable | Yes |

- PROFINET
- firmware update
- removable terminal for control circuit
- analog output

Yes; in connection with the PROFINET Standard communication module

Yes

Yes

Yes; 4 ... 20 mA (default) / 0 ... 10 V (parameterizable with High Feature HMI)

Power Electronics

| | |
|---|--|
| Operating current | |
| • at 40 °C rated value | 63 A |
| • at 50 °C rated value | 55.5 A |
| • at 60 °C rated value | 50.5 A |
| Operating current at inside-delta circuit | |
| • at 40 °C rated value | 109 A |
| • at 50 °C rated value | 96 A |
| • at 60 °C rated value | 87.5 A |
| Operating voltage | |
| • rated value | 200 ... 480 V |
| • at inside-delta circuit rated value | 200 ... 480 V |
| Relative negative tolerance of the operating voltage | -15 % |
| Relative positive tolerance of the operating voltage | 10 % |
| Relative negative tolerance of the operating voltage at inside-delta circuit | -15 % |
| Relative positive tolerance of the operating voltage at inside-delta circuit | 10 % |
| Operating power for three-phase motors | |
| • at 230 V at 40 °C rated value | 18.5 kW |
| • at 230 V at inside-delta circuit at 40 °C rated value | 30 kW |
| • at 400 V at 40 °C rated value | 30 kW |
| • at 400 V at inside-delta circuit at 40 °C rated value | 55 kW |
| Operating frequency 1 rated value | 50 Hz |
| Operating frequency 2 rated value | 60 Hz |
| Relative negative tolerance of the operating frequency | -10 % |
| Relative positive tolerance of the operating frequency | 10 % |
| Adjustable motor current | |
| • minimum | 25.5 A |
| • at inside-delta circuit minimum | 44.2 A |
| Minimum load [%] | 15 %; Relative to smallest settable I _e |
| Power loss [W] for rated value of the current at AC | |
| • at 40 °C to power-up | 31 W |
| • at 50 °C to power-up | 29 W |

- at 60 °C to power-up

27 W

Control circuit/ Control

| | |
|--|--|
| Type of voltage of the control supply voltage | AC |
| Control supply voltage at AC | |
| • at 50 Hz | 110 ... 250 V |
| • at 60 Hz | 110 ... 250 V |
| Relative negative tolerance of the control supply voltage at AC at 50 Hz | -15 % |
| Relative positive tolerance of the control supply voltage at AC at 50 Hz | 10 % |
| Relative negative tolerance of the control supply voltage at AC at 60 Hz | -15 % |
| Relative positive tolerance of the control supply voltage at AC at 60 Hz | 10 % |
| Control supply voltage frequency | 50 ... 60 Hz |
| Relative negative tolerance of the control supply voltage frequency | -10 % |
| Relative positive tolerance of the control supply voltage frequency | 10 % |
| Control supply current in standby mode rated value | 30 mA |
| Holding current in the by-pass mode operating rated value | 75 mA |
| Starting current at close of by-pass contact maximum | 2.5 A |
| Inrush current peak at connect of control supply voltage maximum | 12.2 A |
| Duration of inrush current peak at connect of control supply voltage | 2.2 ms |
| Design of the overvoltage protection | Varistor |
| Design of short-circuit protection for control circuit | 4 A gG fuse (I _{cu} =1 kA), 6 A quick-acting fuse (I _{cu} =1 kA), C1 miniature circuit breaker (I _{cu} = 600 A), C6 miniature circuit breaker (I _{cu} = 300 A); Is not part of scope of supply |

Inputs/ Outputs

| | |
|---|---|
| Number of digital inputs | 1 |
| Number of inputs for thermistor connection | 0 |
| Number of digital outputs | 3 |
| • not parameterizable | 2 |
| Digital output version | 2 normally-open contacts (NO) / 1 changeover contact (CO) |
| Number of analog outputs | 1 |
| Switching capacity current of the relay outputs | |
| • at AC-15 at 250 V rated value | 3 A |
| • at DC-13 at 24 V rated value | 1 A |

Installation/ mounting/ dimensions

| | |
|-------------------|--|
| Mounting position | +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface |
|-------------------|--|

| | |
|--|---|
| (mounting type) | screw fixing |
| Height | 306 mm |
| Width | 185 mm |
| Depth | 203 mm |
| Required spacing with side-by-side mounting | |
| • forwards | 10 mm |
| • Backwards | 0 mm |
| • upwards | 100 mm |
| • downwards | 75 mm |
| • at the side | 5 mm |
| Installation altitude at height above sea level maximum | 5 000 m; Derating as of 1000 m, see catalog |
| Weight without packaging | 5.6 kg |

Connections/Terminals

| | |
|--|---|
| Type of electrical connection | |
| • for main current circuit | screw-type terminals |
| • for control circuit | screw-type terminals |
| Type of connectable conductor cross-sections | |
| • for main contacts for box terminal using the front clamping point solid | 1x (2.5 ... 16 mm ²) |
| • for main contacts for box terminal using the front clamping point finely stranded with core end processing | 1x (2.5 ... 50 mm ²) |
| • for main contacts for box terminal using the front clamping point stranded | 1x (10 ... 70 mm ²) |
| • at AWG conductors for main contacts for box terminal using the front clamping point | 1x (10 ... 2/0) |
| • for main contacts for box terminal using the back clamping point solid | 1x (2.5 ... 16 mm ²) |
| • at AWG conductors for main contacts for box terminal using the back clamping point | 1x (10 ... 2/0) |
| • for main contacts for box terminal using both clamping points solid | 2x (2.5 ... 16 mm ²) |
| • for main contacts for box terminal using both clamping points finely stranded with core end processing | 2x (2.5 ... 35 mm ²) |
| • for main contacts for box terminal using both clamping points stranded | 2x (6 ... 16 mm ²), 2x (10 ... 50 mm ²) |
| • for main contacts for box terminal using the back clamping point finely stranded with core end processing | 1x (2.5 ... 50 mm ²) |
| • for main contacts for box terminal using the back clamping point stranded | 1x (10 ... 70 mm ²) |
| Type of connectable conductor cross-sections | |

| | |
|--|--|
| <ul style="list-style-type: none"> • for control circuit solid | 1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²) |
| <ul style="list-style-type: none"> • for control circuit finely stranded with core end processing | 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> • at AWG conductors for control circuit solid | 1x (20 ... 12), 2x (20 ... 14) |
| Wire length | |
| <ul style="list-style-type: none"> • between soft starter and motor maximum | 800 m |
| <ul style="list-style-type: none"> • at the digital inputs at AC maximum | 100 m |

Ambient conditions

| | |
|--|---|
| Ambient temperature | |
| <ul style="list-style-type: none"> • during operation | -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above |
| <ul style="list-style-type: none"> • during storage and transport | -40 ... +80 °C |
| Environmental category | |
| <ul style="list-style-type: none"> • during operation acc. to IEC 60721 | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| <ul style="list-style-type: none"> • during storage acc. to IEC 60721 | 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 |
| <ul style="list-style-type: none"> • during transport acc. to IEC 60721 | 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) |

Communication/ Protocol

| | |
|---|-----|
| Communication module is supported | |
| <ul style="list-style-type: none"> • PROFINET standard | Yes |
| <ul style="list-style-type: none"> • Modbus TCP | Yes |
| <ul style="list-style-type: none"> • PROFIBUS | Yes |

UL/CSA ratings

| | |
|---|--|
| Manufacturer's article number | |
| <ul style="list-style-type: none"> • of fuse <ul style="list-style-type: none"> — at Standard Faults usable up to 575/600 V according to UL — at High Faults usable up to 575/600 V according to UL — at Standard Faults usable at inside-delta circuit up to 575/600 V according to UL — at High Faults usable at inside-delta circuit up to 575/600 V according to UL | Type: Class RK5 / K5, max. 200 A; I _q = 10 kA Type: Class J / L, max. 225 A; I _q = 100 kA Type: Class RK5 / K5, max. 200 A; I _q = 10 kA Type: Class J / L, max. 225 A; I _q = 100 kA |
| Operating power [hp] for three-phase motors | |
| <ul style="list-style-type: none"> • at 200/208 V at 50 °C rated value | 15 hp |
| <ul style="list-style-type: none"> • at 220/230 V at 50 °C rated value | 20 hp |
| <ul style="list-style-type: none"> • at 460/480 V at 50 °C rated value | 40 hp |
| <ul style="list-style-type: none"> • at 200/208 V at inside-delta circuit at 50 °C rated value | 30 hp |
| <ul style="list-style-type: none"> • at 220/230 V at inside-delta circuit at 50 °C rated value | 30 hp |

• at 460/480 V at inside-delta circuit at 50 °C
rated value

75 hp

Contact rating of auxiliary contacts according to UL

R300-B300

General Product Approval

Declaration of Conformity



CCC



CSA



UL



EG-Konf.

[Miscellaneous](#)

Test Certificates

Marine / Shipping

other

[Type Test Certificates/Test Report](#)



LRS



PRS

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5225-1AC14>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5225-1AC14>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5225-1AC14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5225-1AC14&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5225-1AC14/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5225-1AC14&objecttype=14&gridview=view1>

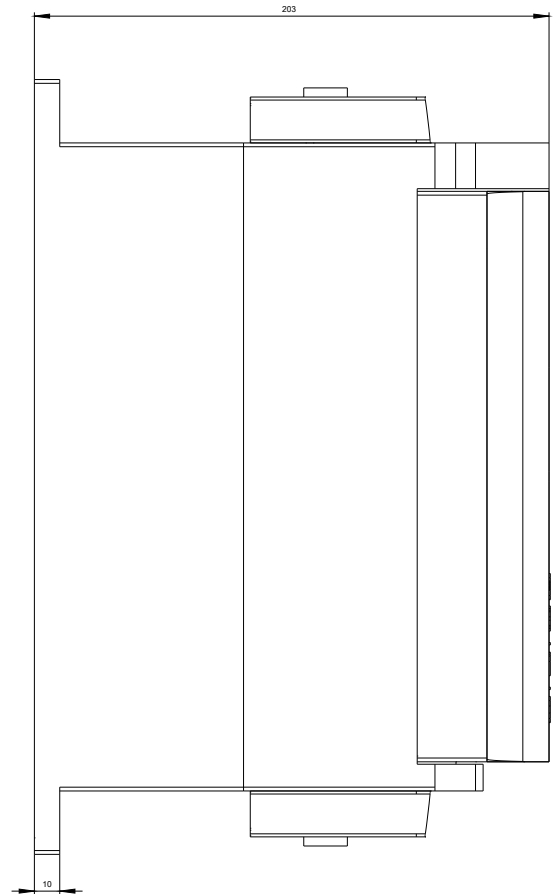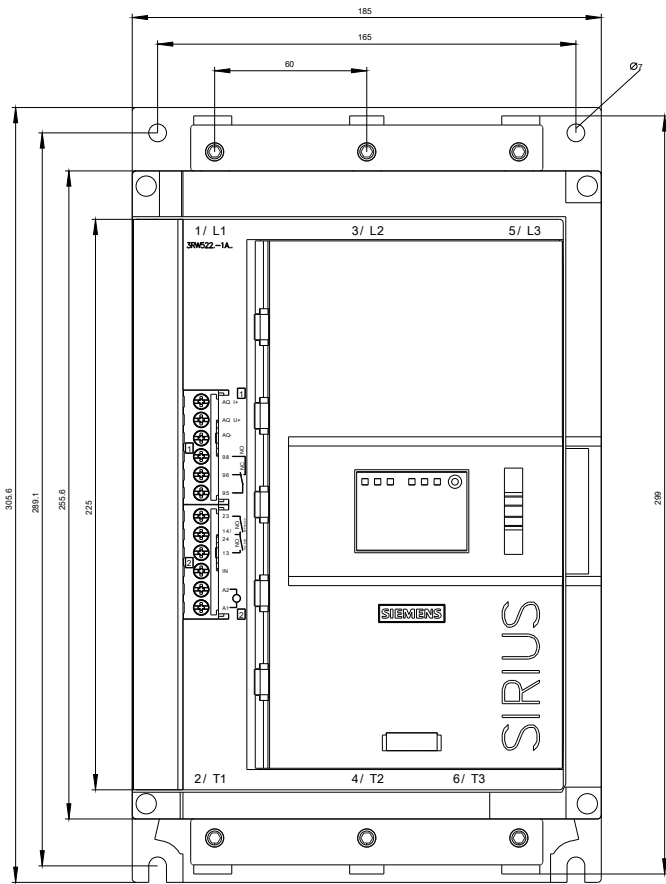

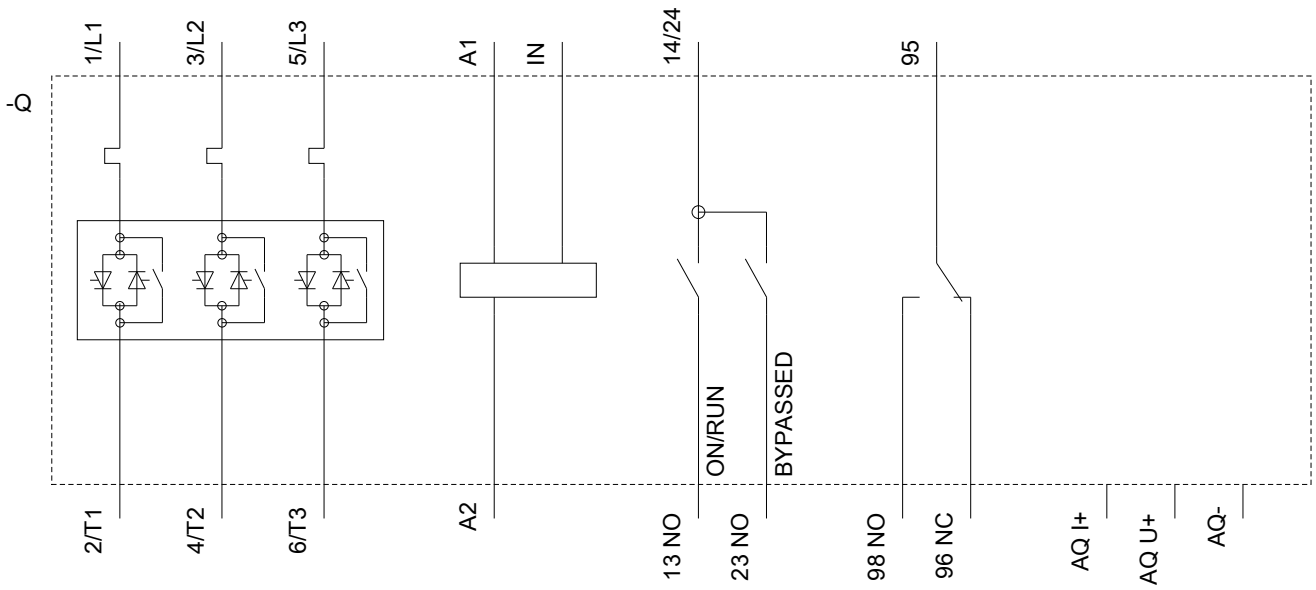

last modified:

05/06/2019