

# NLC-IO-06I-04QTP-01A - I/O extension module



2701072

<https://www.phoenixcontact.com/in/products/2701072>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



I/O extension module for use with Nanoline base unit. Equipped with 6 digital input and 4 PNP digital output channels. A maximum of three I/O extension modules can be attached to a base unit.

## Your advantages

- Automatically recognized by the firmware
- I/O modules are electrically isolated
- Up to 3 modules can be added to the right side of a base unit
- Can be powered from a secondary power supply

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2701072             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | DRA                 |
| Product key                          | DRACAB              |
| Catalog page                         | Page 465 (C-8-2015) |
| GTIN                                 | 4046356325332       |
| Weight per piece (including packing) | 173.3 g             |
| Weight per piece (excluding packing) | 137.6 g             |
| Customs tariff number                | 85389099            |
| Country of origin                    | IN                  |

# NLC-IO-06I-04QTP-01A - I/O extension module



2701072

<https://www.phoenixcontact.com/in/products/2701072>

## Technical data

### Product properties

|                   |                                                       |
|-------------------|-------------------------------------------------------|
| Product type      | Extension module                                      |
| Product family    | Nanoline                                              |
| Mounting position | Attaches to DB-9 connector on right-side of base unit |

### Electrical properties

Supply: Module electronics

|                   |                          |
|-------------------|--------------------------|
| Connection method | Screw connection         |
| Supply voltage    | 24 V DC                  |
| Supply current    | typ. 50 mA<br>max. 90 mA |

### Input data

Digital:

|                                   |                                     |
|-----------------------------------|-------------------------------------|
| Input name                        | Digital inputs                      |
| Description of the input          | PNP/NPN                             |
| Number of inputs                  | 6                                   |
| Connection method                 | Screw connection                    |
| Input voltage range "0" signal    | 0 V DC ... 5 V DC                   |
| Input voltage range "1" signal    | 15 V DC ... 30 V DC                 |
| Nominal input voltage $U_{IN}$    | 24 V DC                             |
| Nominal input current at $U_{IN}$ | 5 mA DC (On)<br>< 100 $\mu$ A (Off) |
| Typical response time             | 60 $\mu$ s (on)<br>70 $\mu$ s (OFF) |

### Output data

Digital:

|                                                     |                                       |
|-----------------------------------------------------|---------------------------------------|
| Output name                                         | Digital outputs                       |
| Output description                                  | PNP outputs                           |
| Connection method                                   | Screw connection                      |
| Number of outputs                                   | 4                                     |
| Protective circuit                                  | Short-circuit and overload protection |
| Maximum output current per channel                  | 500 mA                                |
| Maximum output current per module / terminal block  | 2 A                                   |
| Maximum output current per module                   | 2 A                                   |
| Nominal load, inductive                             | 12 VA ((1.2H))                        |
| Nominal load, lamp                                  | 12 W                                  |
| Nominal load, ohmic                                 | 12 W                                  |
| Maximum operating frequency with ohmic nominal load | 100 Hz                                |

# NLC-IO-06I-04QTP-01A - I/O extension module




2701072

<https://www.phoenixcontact.com/in/products/2701072>

## Connection data

|                   |                  |
|-------------------|------------------|
| Connection method | Screw connection |
|-------------------|------------------|

## Dimensions

|                     |                                                                                    |
|---------------------|------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 40 mm                                                                              |
| Height              | 103.5 mm                                                                           |
| Depth               | 43 mm                                                                              |

## Environmental and real-life conditions

|                                         |                  |
|-----------------------------------------|------------------|
| Ambient conditions                      |                  |
| Degree of protection                    | IP20             |
| Ambient temperature (operation)         | -25 °C ... 60 °C |
| Degree of protection                    | IP20             |
| Ambient temperature (storage/transport) | -25 °C ... 85 °C |
| Permissible humidity (operation)        | 0 % ... 90 %     |

## Mounting

|                   |                                                       |
|-------------------|-------------------------------------------------------|
| Mounting type     | DIN rail mounting                                     |
|                   | DIN rail mounting                                     |
| Mounting position | Attaches to DB-9 connector on right-side of base unit |

# NLC-IO-06I-04QTP-01A - I/O extension module


2701072

<https://www.phoenixcontact.com/in/products/2701072>




## Drawings

Connection diagram

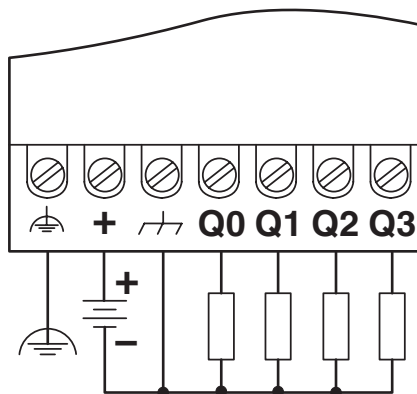

Dimensional drawing

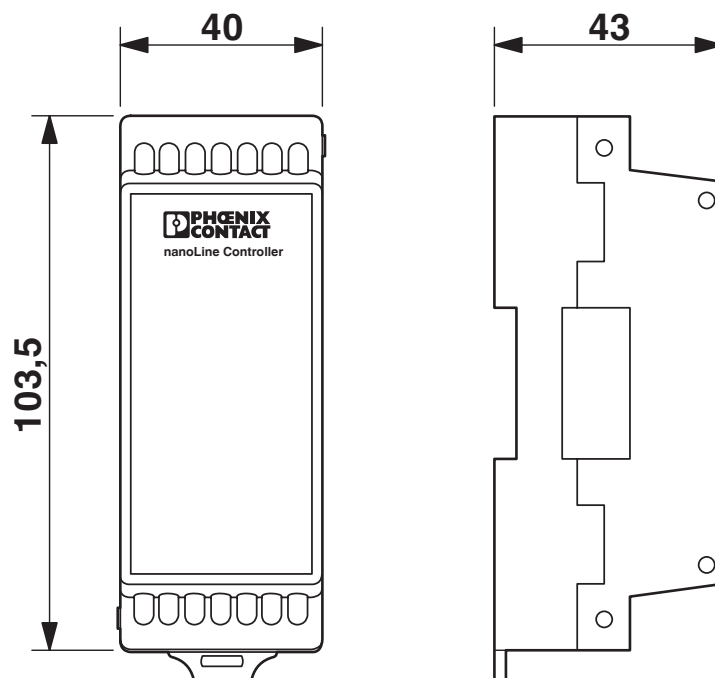

# NLC-IO-06I-04QTP-01A - I/O extension module



2701072

<https://www.phoenixcontact.com/in/products/2701072>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/2701072>



**UL Listed**

Approval ID: E238705



**cUL Listed**

Approval ID: E238705



**EAC**

Approval ID: TR\_TS\_D\_01831-19

**cULus Listed**

# NLC-IO-06I-04QTP-01A - I/O extension module



2701072

<https://www.phoenixcontact.com/in/products/2701072>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27242216 |
| ECLASS-12.0 | 27242216 |
| ECLASS-13.0 | 27242216 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001417 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122300 |
|-------------|----------|

## Environmental product compliance

### EU RoHS

|                                         |      |
|-----------------------------------------|------|
| Fulfills EU RoHS substance requirements | Yes  |
| Exemption                               | 6(c) |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | 95c8bbfb-f003-45b3-a318-976d4e1ab4b8 |