SIEMENS

Data sheet 3RT2027-1AP04



power contactor, AC-3e/AC-3, 32 A, 15 kW / 400 V, 3-pole, 230 V AC, 50 Hz, auxiliary contacts: 2 NO + 2 NC, screw terminal, size: S0, removable auxiliary switch

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S0
product extension	
 function module for communication 	No
auxiliary switch	No
power loss [W] for rated value of the current	
 at AC in hot operating state 	6.3 W
 at AC in hot operating state per pole 	2.3 W
without load current share typical	2.5 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	8,3g / 5 ms, 5,3g / 10 ms
shock resistance with sine pulse	
• at AC	13,5g / 5 ms, 8,3g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
operating voltage	
• at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	
 at AC-1 at 400 V at ambient temperature 40 °C rated 	50 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated	50 A
value	40 A
 up to 690 V at ambient temperature 60 °C rated value 	42 A
• at AC-3	
— at 400 V rated value	32 A
— at 500 V rated value	32 A
— at 690 V rated value	21 A
• at AC-3e	
— at 400 V rated value	32 A
— at 500 V rated value	32 A
	21 A
— at 690 V rated value● at AC-4 at 400 V rated value	22 A
	44 A
at AC-5a up to 690 V rated value	
at AC-5b up to 400 V rated value	26.5 A
• at AC-6a	00.0 A
— up to 230 V for current peak value n=20 rated value	30.8 A
— up to 400 V for current peak value n=20 rated value	30.8 A
— up to 500 V for current peak value n=20 rated value	27 A
— up to 690 V for current peak value n=20 rated value	21 A
• at AC-6a	
 up to 230 V for current peak value n=30 rated value 	20.5 A
 up to 400 V for current peak value n=30 rated value 	20.5 A
 up to 500 V for current peak value n=30 rated value 	18 A
 up to 690 V for current peak value n=30 rated value 	18 A
minimum cross-section in main circuit at maximum AC-1 rated value	10 mm²
operational current for approx. 200000 operating cycles at	
AC-4	
• at 400 V rated value	12 A
• at 690 V rated value	12 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	35 A
— at 60 V rated value	20 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
with 2 current paths in series at DC-1	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	5 A
— at 440 V rated value	1A
— at 600 V rated value	0.8 A
with 3 current paths in series at DC-1 at 24 V rated value.	25 A
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	35 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
 at 1 current path at DC-3 at DC-5 	

= 18 20 V rated value	1041/4	00.4
	— at 24 V rated value	20 A
- with 2 current paths in series at DC-3 at DC-5 - at 24 V rated value - at 20 V rated value - at 400 V rated value - at 400 V rated value - at 400 V rated value - at 500 V rated value - with 3 current paths in series at DC-3 at DC-5 - at 24 V rated value - at 60 V rated value - at 60 V rated value - at 100 V rated value - at 440 V rated value - at 100 V rated value - at 440 V rated value - at 60 V rated value - at 440 V rated value - at 60 V rated value		0.09 A
		0.06 A
	 with 2 current paths in series at DC-3 at DC-5 	
at 110 V rated value	— at 24 V rated value	35 A
	— at 60 V rated value	35 A
at 440 V rated value at 600 V rated value at 24 V rated value at 240 V rated value at 250 V rated value at 250 V rated value at 250 V rated value	— at 110 V rated value	15 A
at 600 V rated value	— at 220 V rated value	3 A
- with 3 current paths in series at DC-3 at DC-5	— at 440 V rated value	0.27 A
	— at 600 V rated value	0.16 A
	 with 3 current paths in series at DC-3 at DC-5 	
	— at 24 V rated value	35 A
	— at 60 V rated value	35 A
	— at 110 V rated value	35 A
operating power	— at 220 V rated value	10 A
at AC3	— at 440 V rated value	0.6 A
- at 230 V rated value	— at 600 V rated value	0.6 A
	operating power	
	• at AC-3	
- at 500 V rated value - at 690 V rated value - at AC-3e - at 230 V rated value - 2	— at 230 V rated value	7.5 kW
■ at AC-3e ■ at AC-3e ■ at 230 V rated value — at 400 V rated value — at 400 V rated value — at 500 V rated value — at 500 V rated value — at 500 V rated value — at 690 V rated value • at 400 V rated value • at 690 V rated value • poperating apparent power at AC-8a • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 1 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 50 s switching at zero current maximum • limited	— at 400 V rated value	15 kW
- at 230 V rated value - at 400 V rated value - at 500 V rated value - at 690 V rated value - up to 230 V for current peak value n=20 rated value - up to 500 V for current peak value n=20 rated value - up to 500 V for current peak value n=20 rated value - up to 500 V for current peak value n=30 rated value - up to 400 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500	— at 500 V rated value	15 kW
- at 230 V rated value - at 400 V rated value - at 500 V rated value - at 690 V rated value - up to 230 V for current peak value n=20 rated value - up to 400 V for current peak value n=20 rated value - up to 500 V for current peak value n=20 rated value - up to 500 V for current peak value n=20 rated value - up to 590 V for current peak value n=20 rated value - up to 590 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current peak value n=30 rated value - up to 500 V for current p	— at 690 V rated value	18.5 kW
- at 400 V rated value - at 600 V rated value operating power for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 600 V rated value • up to 230 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30	• at AC-3e	
	— at 230 V rated value	7.5 kW
operating power for approx. 200000 operating cycles at AC-4 at 400 V rated value at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value operating apparent power at AC-6a up to 500 V for current peak value n=20 rated value operating apparent power at AC-6a up to 690 V for current peak value n=30 rated value operating apparent power at AC-6a up to 500 V for current peak value n=30 rated value operating apparent power at AC-6a up to 500 V for current peak value n=30 rated value operating apparent power at AC-6a up to 500 V for current peak value n=30 rated value operating apparent power at AC-6a sup to 500 V for current peak value n=30 rated value operating apparent power at AC-6a sup to 500 V for current peak value n=30 rated value operating apparent power at AC-6a sup to 500 V for current peak value n=30 rated value operating apparent power at AC-6a sup to 500 V for current peak value n=30 rated value operating apparent power at AC-6a sup to 500 V for current peak value n=30 rated value operating apparent power at AC-6a sup to 500 V for current peak value n=30 rated value operating withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum olimited to 5 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching at zero current maximum olimited to 60 s switching	— at 400 V rated value	15 kW
operating power for approx. 200000 operating cycles at AC-4 at 400 V rated value at 690 V rated value but to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC-3 maximum at AC-2 maximum at AC-3 maximum at AC-3 maximum at AC-3 maximum at AC-3 maximum at AC-4 maximum 250 1/h Control circuit/ Control	— at 500 V rated value	15 kW
at 400 V rated value at 800 V rated value 10.3 kW operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero curre	— at 690 V rated value	18.5 kW
at 400 V rated value at 68 W to at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 230 V for current peak value n=30 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value sup to 500 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at Imited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC-3 maximum at AC-2 maximum at AC-3 maximum at AC-3 maximum at AC-3 maximum at AC-3 maximum at AC-4 maximum at AC-4 maximum at AC-4 maximum 50 1/h 50 1/h Control circuit/ Control	operating power for approx. 200000 operating cycles at AC-	
at 690 V rated value operating apparent power at AC-6a up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=30 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 21.5 kVA 31.6 kVA 42.7 kVA 42.8 kVA 49.9 A; Use minimum cross-section acc. to AC-1 rated value ilimited to 10 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilimited to 60 s switching at zero current maximum ilim	4	
operating apparent power at AC-6a • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 590 V for current peak value n=20 rated value • up to 590 V for current peak value n=20 rated value • up to 690 V for current peak value n=30 rated value • up to 230 V for current peak value n=30 rated value • up to 590 V for current peak value n=30 rated value • up to 590 V for current peak value n=30 rated value • up to 590 V for current peak value n=30 rated value • up to 590 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum	at 400 V rated value	6 kW
up to 230 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value 23.3 kVA up to 690 V for current peak value n=20 rated value 25 kVA operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum ship in the foliant of the folia	at 690 V rated value	10.3 kW
• up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=30 rated value • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • limited to 1 s switching at zero current maximum • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to	operating apparent power at AC-6a	
up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC-1 rated value 10 at AC-1 maximum 1000 1/h at AC-2 maximum at AC-3 maximum at AC-4 maximum 250 1/h 250 1/h Control circuit/ Control	 up to 230 V for current peak value n=20 rated value 	12.2 kVA
up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum at AC-1 rated value limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum 1000 1/h at AC-2 maximum at AC-3 maximum at AC-3 maximum at AC-4 maximum 25 kVA 8.1 kVA 8.2 kVA 8.3 kVA 14.2 kVA 15.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value 260 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 163 A; Use minimum cross-section acc. to AC-1 rated value 164 A; Use minimum cross-section acc. to AC-1 rated value 165 A; Use minimum cross-section acc. to AC-1 rated value 167 A; Use minimum cross-section acc. to AC-1 rated value 168 A; Use minimum cross-section acc. to AC-1 rated value 169 A; Use minimum cross-section acc. to AC-1 rated value 160 A; Use minimum cross-section acc. to AC-1 rated value 161 A; Use minimum cross-section acc. to AC-1 rated value 162 A; Use minimum cross-section acc. to AC-1 rated value 163 A; Use minimum cross-section acc. to AC-1 rated value 164 A; Use minimum cross-section acc. to AC-1 rated value 165 A; Use minimum cross-section acc. to AC-1 rated value 167 A; Use A; Use A; Use A		21.3 kVA
operating apparent power at AC-6a • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 80 s switching at zero current maximum • limited to 80 s switching at zero current maximum • limited to 80 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching	 up to 500 V for current peak value n=20 rated value 	23.3 kVA
up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value limited to 1 s switching at zero current maximum limited to 1 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero curre	• up to 690 V for current peak value n=20 rated value	25 kVA
up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C ilmited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum loolod switching frequency at AC operating frequency at AC-1 maximum lood 1/h operating frequency at AC-2 maximum lood 1/h at AC-3 maximum lood 1/h other current peak value list. kVA 15.5 kVA 21.5 kVA 499 A; Use minimum cross-section acc. to AC-1 rated value limited to 10 s switching at zero current maximum lood A; Use minimum cross-section acc. to AC-1 rated value limited to 40° C switching at zero current maximum lood A; Use minimum cross-section acc. to AC-1 rated value limited to 40° A; Use minimum cross-section acc. to AC-1 rated value limited to 40° A; Use minimum cross-section acc. to AC-1 rated value limited to 40° A; Use minimum cross-section acc. to AC-1 rated value limited to 40° A; Use minimum cross-section acc. to AC-1 rated value limited to 40° A; Use minimum cross-section acc. to AC-1 rated value limited to 40° A; Use minimum cross-section acc. to AC-1 rated value limited to 40° A; Use minimum cross-section acc. to AC-1 rated value limited to 40° A; Use minimum cross-section acc. to AC-1 rated value limited to 40° A; Use minimum cross-section acc. to AC-1 rated value limited to 40° A; Use minimum cross-section acc. to AC-1 rated val	operating apparent power at AC-6a	
 up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60	• up to 230 V for current peak value n=30 rated value	8.1 kVA
• up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum 100 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cross-section acc. to AC-1 rated value 110 A; Use minimum cros	 up to 400 V for current peak value n=30 rated value 	14.2 kVA
short-time withstand current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum 162 A; Use minimum cross-section acc. to AC-1 rated value no-load switching frequency • at AC • at AC-1 maximum 1 000 1/h • at AC-2 maximum • at AC-3 maximum • at AC-3 maximum • at AC-3 maximum • at AC-4 maximum • at AC-5 outrol	• up to 500 V for current peak value n=30 rated value	15.5 kVA
• limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum • limited to 60 s switching at zero current maximum ro-load switching frequency • at AC operating frequency • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-3 maximum • at AC-3 maximum • at AC-4 maximum • at AC-5 control Control circuit/ Control	• up to 690 V for current peak value n=30 rated value	21.5 kVA
 limited to 1 s switching at zero current maximum limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching frequency at AC at AC-1 maximum at AC-2 maximum at AC-3 maximum at AC-4 maximum control circuit/ Control 		
 limited to 5 s switching at zero current maximum limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum no-load switching frequency at AC at AC-1 maximum at AC-2 maximum at AC-3 maximum at AC-3 maximum at AC-4 maximum at AC-4 maximum 250 1/h Control circuit/ Control Switching at zero current maximum 199 A; Use minimum cross-section acc. to AC-1 rated value 100 1/h 10		400 A. Han minimum annua a " A A A A A A A A
 limited to 10 s switching at zero current maximum limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum limited to 60 s switching at zero current maximum no-load switching frequency at AC at AC-1 maximum at AC-2 maximum at AC-3 maximum at AC-3 maximum at AC-3 maximum at AC-4 maximum at AC-5 maximum at AC-6 maximum at AC-7 maximum at AC-7 maximum at AC-8 maximum at AC-9 maximum at AC-9 maximum at AC-1 maximum at AC-2 maximum at AC-3 maximum at AC-4 maximum at AC-5 maximum at AC-6 maximum at AC-7 maximum at AC-8 maximum at AC-9 ma	<u> </u>	
 limited to 30 s switching at zero current maximum limited to 60 s switching at zero current maximum no-load switching frequency at AC operating frequency at AC-1 maximum at AC-2 maximum at AC-3 maximum at AC-3 e maximum at AC-4 maximum at AC-4 maximum at AC-4 maximum 250 1/h Control circuit/ Control	-	
 limited to 60 s switching at zero current maximum no-load switching frequency at AC 5 000 1/h operating frequency at AC-1 maximum at AC-2 maximum at AC-3 maximum at AC-3e maximum at AC-3e maximum at AC-4 maximum at AC-4 maximum 250 1/h Control circuit/ Control 	-	
no-load switching frequency • at AC operating frequency • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-3 maximum • at AC-3e maximum • at AC-4 maximum • at AC-4 maximum • at AC-4 maximum Control circuit/ Control	-	
 at AC operating frequency at AC-1 maximum at AC-2 maximum at AC-3 maximum at AC-3 maximum at AC-3e maximum at AC-3e maximum at AC-4 maximum 250 1/h Control circuit/ Control	•	162 A; Use minimum cross-section acc. to AC-1 rated value
operating frequency 1 000 1/h • at AC-1 maximum 750 1/h • at AC-3 maximum 750 1/h • at AC-3e maximum 750 1/h • at AC-4 maximum 250 1/h Control circuit/ Control		- 000 4#
 at AC-1 maximum at AC-2 maximum at AC-3 maximum at AC-3 maximum at AC-3e maximum at AC-4 maximum Control circuit/ Control 		5 000 1/h
 at AC-2 maximum at AC-3 maximum at AC-3e maximum at AC-3e maximum at AC-4 maximum 250 1/h Control circuit/ Control		4.000 48
 at AC-3 maximum at AC-3e maximum at AC-4 maximum 250 1/h Control circuit/ Control 		
at AC-3e maximum at AC-4 maximum 250 1/h Control circuit/ Control		
at AC-4 maximum 250 1/h Control circuit/ Control		
Control circuit/ Control	• at AC-3e maximum	750 1/h
		250 1/h
type of voltage of the control supply voltage AC	Control circuit/ Control	
	type of voltage of the control supply voltage	AC

control supply voltage at AC	000 V
at 50 Hz rated value	230 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	0.0 1.1
• at 50 Hz	77 VA
inductive power factor with closing power of the coil	11 VA
at 50 Hz	0.82
apparent holding power of magnet coil at AC	0.02
• at 50 Hz	9.8 VA
inductive power factor with the holding power of the coil	5.0 VA
at 50 Hz	0.25
closing delay	0.20
• at AC	8 40 ms
opening delay	0 40 III3
• at AC	4 16 ms
arcing time	10 10 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous	2
contact	
number of NO contacts for auxiliary contacts instantaneous	2
contact	
operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	6 A
 at 400 V rated value 	3 A
 at 500 V rated value 	2 A
at 690 V rated value	1 A
operational current at DC-12	
at 24 V rated value	10 A
at 48 V rated value	6 A
at 60 V rated value	6 A
• at 110 V rated value	3 A
at 125 V rated value	2 A
at 220 V rated value	1 A
at 600 V rated value	0.15 A
operational current at DC-13	
 at 24 V rated value 	6 A
 at 48 V rated value 	2 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 125 V rated value	0.9 A
at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	27 A
at 600 V rated value	27 A
yielded mechanical performance [hp]	
for single-phase AC motor	
— at 110/120 V rated value	2 hp
— at 230 V rated value	5 hp
• for 3-phase AC motor	
— at 200/208 V rated value	10 hp
— at 220/230 V rated value	10 hp
— at 460/480 V rated value	20 hp
— at 575/600 V rated value	25 hp
contact rating of auxiliary contacts according to UL	A600 / Q600

Short-circuit protection	
design of the fuse link	
for short-circuit protection of the main circuit	
with type of coordination 1 required	gG: 125A (690V,100kA), aM: 50A (690V,100kA), BS88: 125A (415V,80kA)
with type of assignment 2 required	gG: 50A (690V,100kA), aM: 25A (690V, 100kA), BS88: 50A (415V, 80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and
fastening method	backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	85 mm
width	45 mm
depth	141 mm
required spacing	14
with side-by-side mounting forwards	10 mm
— forwards	
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
• for grounded parts	40
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
 for auxiliary and control circuit 	screw-type terminals
 at contactor for auxiliary contacts 	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections for main contacts	
• solid	2x (1 2.5 mm²), 2x (2.5 10 mm²)
 solid or stranded 	2x (1 2.5 mm²), 2x (2.5 10 mm²)
 finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
connectable conductor cross-section for main contacts	
• solid	1 10 mm²
• stranded	1 10 mm²
finely stranded with core end processing	1 10 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 2.5 mm²
finely stranded with core end processing	0.5 2.5 mm ²
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
for AWG cables for auxiliary contacts	2x (0.3 1.3 min), 2x (0.73 2.3 min) 2x (20 16), 2x (18 14)
AWG number as coded connectable conductor cross	ZA (20 10), ZA (10 17)
section	
for main contacts	16 8
for auxiliary contacts	20 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 mirror contact according to IEC 60947-4-1 positively driven operation according to IEC 60947-5-1 	Yes No

B10 value with high demand rate according to SN 31920	450 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

General Product Approval





Confirmation



KC



ЕМС

Functional Safety/Safety of Machinery

Declaration of Conformity

Test Certificates



Type Examination Cer**tificate**





Special Test Certific-<u>ate</u>

Type Test Certificates/Test Report

Marine / Shipping













other

Railway

Environment

Household and similar appliances

Confirmation

Confirmation

Vibration and Shock

Environmental Confirmations

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2027-1AP04

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2027-1AP04

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT202


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2027-1AP04&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2027-1AP04/char


Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2027-1AP04&objecttype=14&gridview=view1







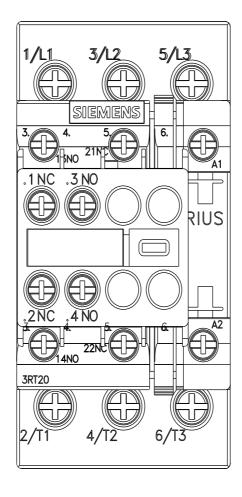

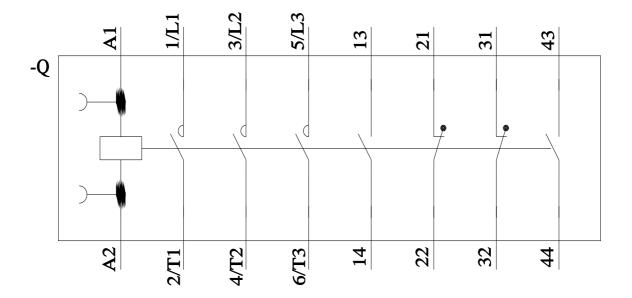

last modified: 8/15/2023 🖸