


# Keysight 33210A

## 10 MHz Function/Arbitrary Waveform Generator

### Data Sheet

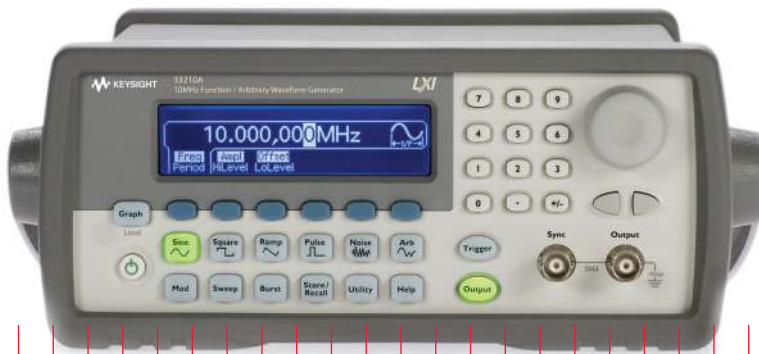

- 10 MHz Sine and Square waveforms
- Pulse, Ramp, Triangle, Noise, and DC waveforms
- Optional 14-bit, 50 MSa/s, 8K point Arbitrary Waveform Generator
- AM, FM, and PWM modulation types
- Linear & logarithmic sweeps and burst operation
- 10 mVpp to 10 Vpp amplitude range
- Graph mode for visual verification of signal settings
- Connect via USB, GPIB and LAN
- Fully compliant to LXI Class C specification



Uncompromising performance at an affordable price

The Keysight Technologies, Inc. 33210A function/arbitrary waveform generator is the latest addition to the 332XX family. Waveforms are generated using direct digital synthesis (DDS) technology which creates stable, accurate low distortion sine waves as well as square waves with fast rise and fall times up to 10 MHz and linear ramp waves up to 100 kHz. For user defined waveforms, Option 002 provides 14-bit, 50 MSa/s 8K point arbitrary waveform generation.

Pulse generation

The 33210A can generate variable-edge-time pulses up to 5 MHz. With variable period, pulse width, and amplitude the 33210A is ideally suited to a wide variety of applications requiring a flexible pulse signal.

Custom waveform generation (Option 002)

The optional 8K point arbitrary waveform generator (Option 002) can be used in the 33210A to generate complex custom waveforms. With 14-bit resolution, and a sampling rate of 50 MSa/s, the 33210A gives you the flexibility to create the waveforms you need. It also lets you store up to four waveforms in nonvolatile memory.

The Keysight IntuiLink arbitrary waveform software allows you to easily create, edit, and download complex waveforms using the waveform editor. Or you can capture a waveform using IntuiLink for Oscilloscopes and send it to the 33210A for output. To find out more about IntuiLink, visit [www.keysight.com/find/intuilink](http://www.keysight.com/find/intuilink)

Easy-to-use functionality

Front-panel operation of the 33210A is straight-forward and user friendly. You can access all major functions with a single key or two. The knob or numeric keypad can be used to adjust frequency, amplitude, offset, and other parameters. You can even enter voltage values directly in Vpp, Vrms, dBm, or as high and low levels. Timing parameters can be entered in Hertz (Hz) or seconds.

Internal AM, FM, and PWM modulation make it easy to modulate waveforms without the need for a separate modulation source. Linear and logarithmic sweeps are also built in, with sweep rates selectable from 1 ms to 500 s. Burst mode operation allows for a user-selected number of cycles per trigger. GPIB, LAN, and USB interfaces are all standard, plus you get full programmability using SCPI commands.

External frequency reference (Option 001)

The 33210A external frequency reference lets you synchronize to an external 10 MHz clock, to another 33210A, or to a Keysight 33220A or Keysight 33250A. Phase adjustments can be made from the front panel or via a computer interface, allowing precise phase calibration and adjustment.

Waveforms	
Standard	Sine, Square, Ramp, Triangle, Pulse, Noise, DC
Built-in arbitrary waveforms (available only with Option 002 ARB)	Exponential rise, Exponential fall, Negative ramp, Sin(x)/x, Cardiac
Waveform characteristics	
Sine	
Frequency range	1 mHz to 10 MHz
Amplitude	(relative to 1 kHz)
Flatness <sup>1,2</sup>	< 100 kHz 0.1 dB 100 kHz to 5 MHz 0.2 dB 5 MHz to 10 MHz 0.3 dB
Harmonic distortion <sup>2,3</sup>	< 1 Vpp ≥ 1 Vpp
DC to 20 kHz	-70 dBc -70 dBc
20 kHz to 100 kHz	-65 dBc -60 dBc
100 kHz to 1 MHz	-50 dBc -45 dBc
1 MHz to 10 MHz	-40 dBc -30 dBc
Total harmonic distortion <sup>2,3</sup>	DC to 20 kHz 0.04%
Spurious (non-harmonic) <sup>2,4</sup>	DC to 1 MHz -70 dBc
1 MHz to 10 MHz	-70 dBc + 6 dB/octave
Phase noise (10 kHz offset)	-115 dBc / Hz, typical
Square	
Frequency range	1 mHz to 10 MHz
Rise/fall time	20 ns
Overshoot	< 2%
Variable duty cycle	20% to 80% (to 5 MHz) 40% to 60% (to 10 MHz)
Asymmetry (@ 50% duty)	1% of period + 5 ns
Jitter (RMS)	1 ns + 100 ppm of period
Ramp, triangle	
Frequency range	1 mHz to 100 kHz
Linearity	< 0.1% of peak output
Variable symmetry	0.0% to 100.0%
Pulse	
Frequency range	1 mHz to 5 MHz
Pulse width (period ≤ 10 s)	40 ns minimum 10 ns resolution
Variable edge time	20 ns to 100 ns
Overshoot	< 2%
Jitter (RMS)	300 ps + 0.1 ppm of period
Noise	
Bandwidth	7 MHz typical

## Measurement Characteristics (continued)

### 8K-point arbitrary waveform generator (Option 002)

Frequency range	1 MHz to 3 MHz
Waveform length	2 to 8 k points
Amplitude resolution	14 bits (including sign)
Sample rate	50 MSa/s
Min. rise/fall time	70 ns typical
Linearity	< 0.1% of peak output
Settling time	< 500 ns to 0.5% of final value
Jitter (RMS)	6 ns + 30 ppm
Non-volatile memory	4 waveforms

### Common characteristics

#### Frequency

Accuracy <sup>5</sup>	± (10 ppm + 3 pHz) in 90 days ± (20 ppm + 3 pHz) in 1 year
Resolution	1 µHz (internal) 1 mHz (user)

#### Amplitude

Range	10 mVpp to 10 Vpp into 50 Ω 20 mVpp to 20 Vpp into open circuit
Accuracy <sup>1,2</sup> (at 1 kHz)	± 2% of setting ± 1 mVpp
Units	Vpp, Vrms, dBm
Resolution	3 digits

#### DC offset

Range (peak AC + DC)	± 5 V into 50 Ω ± 10 V into open circuit
Accuracy <sup>1,2</sup>	± 2% of offset setting ± 0.5% of amplitude ± 2 mV
Resolution	3 digits

#### Main output

Impedance	50 Ω typical
Isolation	42 Vpk maximum to earth
Protection	Short-circuit protected, overload automatically disables main output

### External frequency reference (Option 001)

#### Rear panel input

Lock range	10 MHz ± 500 Hz
Level	100 mVpp to 5 Vpp
Impedance	1 kΩ, typical
Lock time	< 2 seconds

#### Rear panel output

Frequency	10 MHz
Level	632 mVpp (0 dBm), typical
Impedance	50 Ω, typical AC coupled

#### Phase offset

Range	+360° to -360°
Resolution	0.001°
Accuracy	20 ns

### Modulation

#### AM

Carrier waveforms	Sine, Square
Source	Internal/External
Internal modulation	Sine, Square, Ramp, Triangle, Noise, Arb <sup>7</sup> (2 MHz to 20 kHz)
Depth	0.0% to 120.0%

#### FM

Carrier waveforms	Sine, Square
Source	Internal/External
Internal modulation	Sine, Square, Ramp, Triangle, Noise, Arb <sup>7</sup> (2 MHz to 20 kHz)
Deviation	DC to 5 MHz

#### PWM

Carrier waveforms	Pulse
Source	Internal/External
Internal modulation	Sine, Square, Ramp, Triangle, Noise, Arb <sup>7</sup> (2 MHz to 20 kHz)
Deviation	0% to 100% of pulse width

### External modulation input (for AM, FM, PWM)

Voltage range	± 5 V full scale
Input impedance	5 kΩ typical
Bandwidth	DC to 20 kHz

### Sweep

Waveforms	Sine, Square, Ramp
Type	Linear or Logarithmic
Direction	Up or Down
Sweep time	1 ms to 500 s
Trigger source	Single, External or Internal
Marker	Falling edge of sync signal (programmable frequency)

### Burst <sup>6</sup>

Waveforms	Sine, Square, Ramp
Type	Counted (1 to 50,000 cycles), Infinite, Gated
Start/stop phase	+360° to -360°
Internal period	1 µs to 500 s
Gate source	External trigger
Trigger source	Single, External or Internal

### Trigger characteristics

#### Trigger input

Input level	TTL compatible
Slope	Rising or Falling, selectable
Pulse width	> 100 ns
Input impedance	> 10 kΩ, DC coupled
Latency	< 500 ns
Jitter (rms)	6 ns (3.5 ns for pulse)

#### Trigger output

Level	TTL compatible into ≥ 1 kΩ
Pulse width	> 400 ns
Output impedance	50 Ω typical
Maximum rate	1 MHz
Fanout	≤ 4 Keysight 33210As (or equivalent)

### Footnotes

- [1] Add 1/10th of output amplitude and offset spec per °C for operation outside the range of 18 to 28 °C
- [2] Autorange enabled
- [3] DC offset set to 0 V
- [4] Spurious output at low amplitude is -75 dBm typical
- [5] Add 1 ppm/°C average for operation outside the range of 18 to 28 °C
- [6] Sine and square waveforms above 3 MHz are allowed only with an "infinite" burst count
- [7] Only available if Option 002 is installed

## Measurement Characteristics (continued)

Programming times (typical)			
Configuration times	USB	LAN	GPIB
Function change	120 ms	120 ms	120 ms
Frequency change	2 ms	3 ms	2 ms
Amplitude change	30 ms	30 ms	30 ms
Select user arb	130 ms	130 ms	130 ms
Arb download times (Option 002)	Binary transfer		
	USB	LAN	GPIB
2 k points	5 ms	9 ms	10 ms
4 k points	8 ms	15 ms	20 ms
8 k points	14 ms	27 ms	40 ms

General	
Power supply	Cat II 100 to 240 V @ 50/60 Hz (–5%, +10%) 100 to 120 V @ 400 Hz (± 10%)
Power consumption	50 VA max
Operating environment	IEC 61010 Pollution Degree 2 Indoor Location
Operating temperature	0 to 55 °C
Operating humidity	5% to 80% RH, non-condensing
Operating altitude	Up to 3000 meters
Storage temperature	–30 to 70 °C
State storage memory	Power off state automatically saved, Four user-configurable stored states
Interface	LAN LXI-C Ethernet 10/100 USB 2.0, GPIB
Language	SCPI – 1993, IEEE-488.2
Dimensions (W x H x D)	
Bench top	261.1 mm x 103.8 mm x 303.2 mm
Rack mount	212.88 mm x 88.3 mm x 272.3 mm
Weight	3.4 kg (7.5 lbs)
Safety designed to	UL-1244, CSA 1010 EN61010
EMC tested to	MIL-461C, EN55011, EN50082-1
Vibration and shock	MIL-T-28800, Type III, Class 5
Acoustic noise	30 dBa
Warm-up time	1 hour

## Ordering Information

Keysight 33210A  
10 MHz function/arbitrary  
waveform generator

### Accessories included

Operating manual, service manual, quick  
reference guide, IntuiLink waveform editor  
software, test data, USB cable, and power  
cord (see language option).

### Options

- Opt. 001** External timebase reference
- Opt. 002** 8K-point arbitrary waveform  
generator
- Opt. A6J** ANSI Z540 calibration
- Opt. AB0** Taiwan: Chinese manual
- Opt. AB1** Korea: Korean manual
- Opt. AB2** China: Chinese manual
- Opt. ABA** English: English manual
- Opt. ABD** Germany: German manual
- Opt. ABF** France: French manual
- Opt. ABJ** Japan: Japanese manual
- Opt. PLG** Continental European  
power cord

### Other Accessories

- 34131A** Carrying case
- 34161A** Accessory pouch
- 34190A** Rackmount kit
- 34191A** Dual flange kit, 2U
- 34194A** Dual lock link kit

**myKeysight**

**myKeysight**

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



**Three-Year Warranty**

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



**Keysight Assurance Plans**

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



[www.keysight.com/quality](http://www.keysight.com/quality)

Keysight Electronic Measurement Group

DEKRA Certified ISO 9001:2008

Quality Management System

**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/33210a](http://www.keysight.com/find/33210a)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

**Asia Pacific**

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

**Europe & Middle East**

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
 (BP-06-16-14)

