XXS18P1VM12

Ultrasonic sensor cylindrical M18 - Sn=1m - analog 0-10V - SYNC - connector M12







Main

Range of product	OsiSense XX
Sensor type	Ultrasonic sensor
Series name	General purpose
Sensor name	XXS
Sensor design	Cylindrical M18
Detection system	Diffuse
[Sn] nominal sensing distance	1 m adjustable with remote teach push-button
Material	Plastic
Type of output signal	Analogue
Wiring technique	4-wire
Analogue output function	010 V
[Us] rated supply voltage	24 V DC with reverse polarity protection
Electrical connection	Male connector M12 5 pins
[Sd] sensing range	0.1051 m
IP degree of protection	IP67 IP65 conforming to IEC 60529

Complementary


Complementary	
Enclosure material	PBT
Front material	Epoxy Rubber Resin
Supply voltage limits	1430 V DC
Function available	With synchronisation mode Software configurable
[Sa] assured operating distance	0.1051 m (teach mode)
Blind zone	105 mm
Transmission frequency	200 kHz
Repeat accuracy	0.1 %
Deviation angle from 90° of object to be detected	-77 °
Minimum size of detected object	Cylinder diameter 1 mm at 600 mm
Status LED	1 LED (green) for echo state 1 LED (yellow) for output state
Current consumption	30 mA
Maximum switching capacity	>= 1 kOhm overload and short-circuit protection
Voltage drop	<= 2 V
Setting-up	Teach mode
Delay first up	<= 180 ms
Delay recovery	<= 100 ms
Marking	CE
Threaded length	45 mm
Height	18 mm
Width	18 mm
	·

Depth	64 mm	
Product weight	0.033 kg	
Environment		
Standards	EN/IEC 60947-5-2	
Standards	UL 508	
	CSA C22.2 No 14	
Product certifications	CULus	
	Ecolab	
	RCM EAC	
	E2	
Ambient air temperature for operation	-2570 °C	
Ambient air temperature for storage	-4080 °C	
Vibration resistance	+/-1 mm conforming to IEC 60068-2-6 1055 Hz	
Shock resistance	30 gn in all 3 axes for 11 ms conforming to IEC 60068-2-27	
Resistance to electrostatic discharge	8 kV level 4 conforming to IEC 61000-4-2	
Resistance to electromagnetic fields	10 V/m level 3 conforming to IEC 61000-4-3	
Resistance to fast transients	1 kV level 3 conforming to IEC 61000-4-4	
Offer Sustainability		
RoHS (date code: YYWW)	Compliant - since 1810 - Schneider Electric declaration of conformi-	
	ty 🗗 Schneider Electric declaration of conformity	
REACh	Reference contains SVHC above the threshold - Go to CaP for more details-	
	☐ Go to CaP for more details	
Product end of life instructions	Available	

Product data sheet Dimensions Drawings

XXS18P1VM12

Dimensions




Product data sheet Connections and Schema

XXS18P1VM12

Connections


Connector Wiring



- (1): Synchronization
- (2): External setting pushbutton or XXZPB100 remote teach pushbutton.

Pin number	Wire color	Description
1	BN: Brown	+1424VDC
2	WH: White	Input teach
3	BU: Blue	0 VDC
4	BK: Black	Output
5	GY: Grey	Synchronization

Wiring Scheme




(1): Synchronization

0-10 1 kΩ...∞

٧.

Wiring for the Synchronization Function (Side by Side Application)

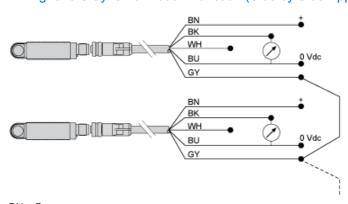


BN: Brown WH: White BU: Blue BK: Black GY: Grey

NB: To enable synchronization between several sensors, all of the wires of pin no.5 (Grey) must be electrically connected together. A maximum of 8 sensors can be synchronized. To enable "Multiplexer" function for the sensors, use the XX Configuration Software. Without synchronization or multiplexing, the sensors must be at least 50 cm away from each other in order to avoid mutual interference.


Performance Curves

Detection Curve with 100 x 100 mm / 3.94 x 3.94 in. Square Target

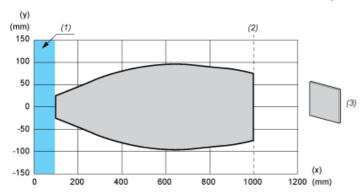

- (x) Target distance
- (y) Detection limit
- (1): Blind zone: 105 mm
- (2): Sn max.
- (3): 100 x 100 mm / 3.94 x 3.94 in. stainless steel plate

Detection Curve with Round Bar

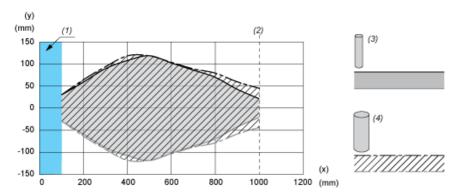


- (x) Target distance
- (y) Detection limit
- (1): Blind zone: 105 mm
- (2): Sn max.
- (3): Ø 10 mm / 0.394 in. stainless steel cylinder
- (4): Ø 25 mm / 0.984 in. stainless steel cylinder

XXS18P1VM12

Operating Diagram

Near and Far Limits Setting with Teach Procedure

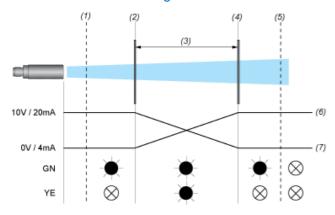



- (1): Blind zone (2): Near limit
- (3): Sensing window
- (4): Far limit
- (5): Sn max
- (6): Inverse
- (7): Direct
- (8): ON (9): OFF
- GN: Green LED
- YE: Yellow LED