




## AC600 Wi-Fi Dual-Band Directional **High Gain USB Adapter**

The next generation 802.11ac wireless standard is set to revolutionize Wi-Fi. Super-speed 802.11ac dual-band routers are already available but wireless devices are still stuck with 802.11n technology. Upgrade your wireless device to dual-band 802.11ac with the USB 2.0 connectivity for blistering Wi-Fi speeds on the interference free 5Ghz frequency band. The EW-7811DAC is with a directional high gain, high-performance, and dual band antenna. This antenna can greatly increase the effective wireless operation range of 802.11ac/a/b/g/n wireless devices.

### **Next Generation Wi-Fi Standard**

The Edimax EW-7811DAC is the next generation of Wi-Fi adapter, compatible with the draft 802.11ac standard and delivering speeds of up to 433Mbps at 5GHz - almost three times as fast as 802.11n. Upgrade PC's and notebooks to super high speed 802.11ac Wi-Fi and enjoy streaming video and data.

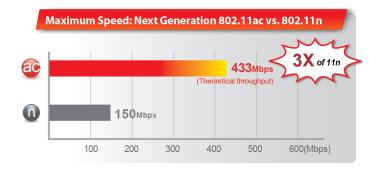

#### **Dual-Band Connectivity**

Enjoy better performance and greater flexibility for your Wi-Fi devices, using dual-band connectivity. The EW-7811DAC provides connectivity for the 2.4GHz band at speeds of 150Mbps or 5Ghz band at speeds of 433Mbps. You can surf the internet and check your email on the 2.4GHz band, or select the 5GHz band for online gaming and video streaming.



Mac & OS X are trademarks of Apple Inc. Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice. Copyright © 2013 Edimax Technology Co. Ltd. All rights reserved. www.edimax.com




## AC600 Wi-Fi Dual-Band Directional High Gain USB Adapter

EW-7811DAC

### 5dBi/7dBi Directional High Gain Antenna

The EW-7811UAC Directional High Gain Antenna, 5dBi (2.4GHz) and 7dBi(5GHz), provides high performance and long distance connections for your wireless network.



Directional High Gain Antenna for Better Performance and Longer Distance

## **USB Cradle for Enhanced Wireless Signal**

The EW-7811DAC comes with a free USB cradle which features a 180-degree adjustable antenna for an improved wireless signal, and a 1.2-meter USB cable for flexible placement. Fine-tune the antenna position for peak performance at no extra cost.



#### **Download and Stream Anywhere**

Use the EW-7811DAC to download and stream media from YouTube, Netflix or other services without waiting for buffering, or stream media across your network from a NAS (network-attached storage) at lightning speeds. Streaming HD movies or downloading is faster and more reliable than ever with 802.11ac Wi-Fi.



Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice. Copyright © 2014 Edimax Technology Co. Ltd. All rights reserved. www.edimax.com



# AC600 Wi-Fi Dual-Band Directional High Gain USB Adapter

**EW-7811DAC** 

## **FEATURES**

- Complies with draft IEEE 802.11ac standard and backward compatible with wireless 802.11a/b/g/n standards
- Dual-band wireless connectivity for 2.4GHz or 5GHz
- Max. Wi-Fi speeds of 150Mbps (2.4GHz) or 433Mbps (5GHz)
- Features a hardware WPS (Wi-Fi Protected Setup) button for easy wireless connections
- Features easy setup wizard
- Supports Windows XP/Vista/7/8/8.1, Linux and Mac OS X drivers
- Directional high gain antenna, 5dBi (2.4GHz) and 7dBi(5GHz), provides high performance long distance wireless connections
- USB cradle for flexible placement and better wireless signal

## **TECHNICAL SPECIFICATIONS**

Hardware	Standards	Frequency Band
<ul> <li>1 x USB 2.0 Type A</li> <li>1 x Hardware WPS Button</li> <li>1 x Link/Activity LED</li> </ul>	<ul> <li>2.4GHz: IEEE 802.11b, 802.11g, 802.11n</li> <li>5GHz: IEEE 802.11ac (Draft), 802.11a, 802.11n</li> </ul>	<ul> <li>2.4000 - 2.4835GHz (subject to local regulations)</li> <li>5.150 - 5.825GHz (subject to local regulations)</li> </ul>
Output Power	Installation	Operating Data Rate
<ul> <li>2.4GHz</li> <li>11b (11Mbps): 16dBm±1.5dBm</li> <li>11g (54Mbps): 14dBm±1.5dBm</li> <li>11n (20MHz, MCS7): 14dBm±1.5dBm</li> <li>11n (40MHz, MCS7): 14dBm±1.5dBm</li> <li>5GHz</li> <li>11a (54Mbps): 12dBm±1.5dBm</li> <li>11n (20MHz, MCS7): 12dBm±1.5dBm</li> <li>11n (40MHz, MCS7): 12dBm±1.5dBm</li> <li>11ac (80MHz, MCS9): 10dBm±1.5dBm</li> </ul>	<ul> <li>Multi-Language easy setup wizard</li> <li>Hardware WPS Button for Easy Wireless Connections</li> </ul>	<ul> <li>11a: 6/9/12/24/36/48/54Mbps;</li> <li>11b: 1/2/5.5/11Mbps;</li> <li>11g: 6/9/12/24/36/48/54Mbps</li> <li>11n (20MHz): MCS0-07 (up to 72Mbps)</li> <li>11n (40MHz): MCS0-07 (up to 144Mbps)</li> <li>11ac (80MHz): MCS0-9 (up to 433Mbps)</li> </ul>
LED	Security	Temperature & Humidity
Link/Activity	<ul> <li>WEP 64/128-bit, WPA, WPA2, WPA3 and 802.1x</li> <li>Hardware &amp; Software WPS Configuration</li> </ul>	Max. 95% (non-condensing) #32 - 104°F (0 - 40°C)
Dimensions & Weight	Certifications	Accessories
♣132(L) x 90(W) x 15(H) mm ♣ 36g	* CE/FCC	1 x USB cradle with 1.2 meter cable
APPLICATION DIAGRAM		*Dimax
Internet		EW-7811DAC I-Band Directional Gain USB Adapter
		EW-7811DAC I-Band Directional Gain USB Adapter

