

Capacity module - QUINT4-CAP/24DC/5/4KJ - 2320539

Note que os dados aqui indicados foram obtidos do catálogo online. Para informações e dados completos, consulte a documentação do usuário. Aplicam-se as Condições Gerais de Utilização para downloads da Internet. (<http://phoenixcontact.pt/download>)



QUINT capacity module with maintenance-free double-layer capacitor-based energy storage for DIN rail mounting, input: 24 V DC, output: 24 V DC/5 A/4 KJ including mounted UTA 107 universal DIN rail adapter.

Descrição do artigo

The maintenance-free QUINT CAP capacity module is ideal for cyclical failures lasting up to 30 seconds. It combines an electronic switch-over unit and maintenance-free, capacitor-based energy storage in the same housing. The USB interface makes it convenient to shut down your PC.

Vantagens para si

- ✓ Convenient shutdown of PCs
- ✓ Maintenance-free with a long service life
- ✓ Space savings, thanks to the compact design
- ✓ Long buffer time, thanks to high memory capacity
- ✓ Lockable USB interface for connecting to industrial PCs, for example



Dados comerciais

Quantidade de embalagem (VPE)	1 stk
GTIN	 4 055626 246918
GTIN	4055626246918
Peso por unidade (exclusive embalagem)	1.474,000 GRM
Número do imposto alfandegário	85322900
País de origem	China
Observação	Produção ligada a pedido (sem retirada)

Dados técnicos

Dimensions

Width	94 mm
Height	130 mm
Depth	125 mm

Ambient conditions

Capacity module - QUINT4-CAP/24DC/5/4KJ - 2320539

Dados técnicos

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C (> 40 °C Derating: 1 %/K)
Ambient temperature (start-up type tested)	-40 °C
Ambient temperature (storage/transport)	-40 °C ... 60 °C
Max. permissible relative humidity (operation)	≤ 95 %
Climatic class	3K3 (in acc. with EN 60721)
Degree of pollution	2
Installation height	≤ 4000 m

Input data

Input voltage	24 V DC (SELV)
Input voltage range	22.5 V DC ... 30 V DC
Current consumption (maximum)	7 A (max.)
Current consumption (idle)	0.1 A (No-load)
Current consumption (charging process)	0.8 A (charging process)
Fixed connect threshold	< 22 V DC

Output data

Nominal output voltage	24 V DC
Nominal output current (I_N)	5 A
Static Boost ($I_{Stat.Boost}$)	6.25 A
Connection in parallel	no
Connection in series	No
Power loss nominal load max.	< 3 W

General

IQ technology	no
Net weight	1.3 kg
Memory medium	Dual layer capacitor
Efficiency	> 97 % (with charged energy storage device)
Protection class	Special application (SELV input voltage, hazardous voltages are generated in the device).
Degree of protection	IP20
MTBF (IEC 61709, SN 29500)	1301923 h (40 °C)
Mounting position	horizontal DIN rail NS 35, EN 60715
Assembly instructions	alignable: horizontally 0 mm, vertically 50 mm

Connection data, input

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²

Capacity module - QUINT4-CAP/24DC/5/4KJ - 2320539

Dados técnicos

Connection data, input

Conductor cross section AWG min.	30
Conductor cross section AWG max.	12
Stripping length	6.5 mm

Connection data, output

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	30
Conductor cross section AWG max.	12
Stripping length	6.5 mm

Signaling

Signalization designation	U _{in} OK
Output name	Electronic relay (photorelay)
Output description	floating 13/14
Maximum switching voltage	30 V DC
Continuous load current	200 mA
Status display	LED
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	1.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	16
Signalization designation	Ready
Output name	Transistor output, active
Output voltage	24 V (U _N - 1 V (typical))
Continuous load current	20 mA
Status display	LED
Signalization designation	Alarm
Output name	Transistor output, active
Output voltage	24 V (U _N - 1 V (typical))
Continuous load current	20 mA
Status display	LED
Signalization designation	Reference potential for Ready, alarm and remote

Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Standards/regulations	EN 61000-4-2

Capacity module - QUINT4-CAP/24DC/5/4KJ - 2320539

Dados técnicos

Standards and Regulations


Contact discharge	4 kV (Test Level 2)
Standards/regulations	EN 61000-4-3
Frequency range	80 MHz ... 1 GHz
Test field strength	10 V/m
Standards/regulations	EN 61000-4-6
Frequency range	0.15 MHz ... 80 MHz
Voltage	10 V
Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
Standard - Electrical safety	IEC 60950-1/VDE 0805 (SELV)
UL approvals	UL Listed UL 508
	UL/C-UL Recognized UL 60950-1
Overvoltage category (EN 60950-1)	I

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 25;
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Desenhos

Block diagram

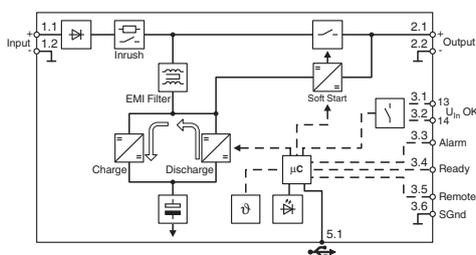

Classificações

eCl@ss

eCl@ss 5.1	27242700
eCl@ss 6.0	27040600
eCl@ss 7.0	27040603
eCl@ss 8.0	27049201
eCl@ss 9.0	27049201

ETIM

ETIM 5.0	EC000382
ETIM 6.0	EC000382

Capacity module - QUINT4-CAP/24DC/5/4KJ - 2320539

Classificações

UNSPSC

UNSPSC 13.2	39121004
-------------	----------

Certificações

Certificações

Certificações

UL Listed / UL Recognized / cUL Recognized / cUL Listed / EAC / UL Recognized / UL Listed / cUL Listed / cUL Recognized / EAC / cULus Recognized / cULus Listed

Certificações Ex

UL Listed / cUL Listed / cULus Listed

Detalhes da certificação

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
-----------	--	---	---------------

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 211944
---------------	--	---	---------------

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 211944
----------------	--	---	---------------

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
------------	--	---	---------------

EAC			RU C- DE.A*30.B.01082
-----	--	--	--------------------------

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 211944
---------------	--	---	---------------

Capacity module - QUINT4-CAP/24DC/5/4KJ - 2320539

Certificações

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
-----------	--	---	---------------

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
------------	--	---	---------------

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 211944
----------------	--	---	---------------

EAC			RU C- DE.A*30.B.01082
-----	--	--	--------------------------

cULus Recognized			
------------------	--	--	--

cULus Listed			
--------------	--	--	--

Acessórios

Acessórios

Assembly adapter

Assembly adapters - UWA 130 - 2901664



2-piece universal wall adapter for securely mounting the power supply in the event of strong vibrations. The profiles that are screwed onto the side of the power supply are screwed directly onto the mounting surface. The universal wall adapter is attached on the left/right.

Assembly adapters - UWA 182/52 - 2938235



Universal wall adapter for securely mounting the power supply in the event of strong vibrations. The power supply is screwed directly onto the mounting surface. The universal wall adapter is attached at the top/bottom.

Capacity module - QUINT4-CAP/24DC/5/4KJ - 2320539

Acessórios

Data cable preassembled

Data cable - MINI-SCREW-USB-DATACABLE - 2908217



Used for communication between an industrial PC and Phoenix Contact devices with USB-Mini-B connection.