




## AS-Interface control cabinet module

SmartL25 4DI AUX 2DO R C

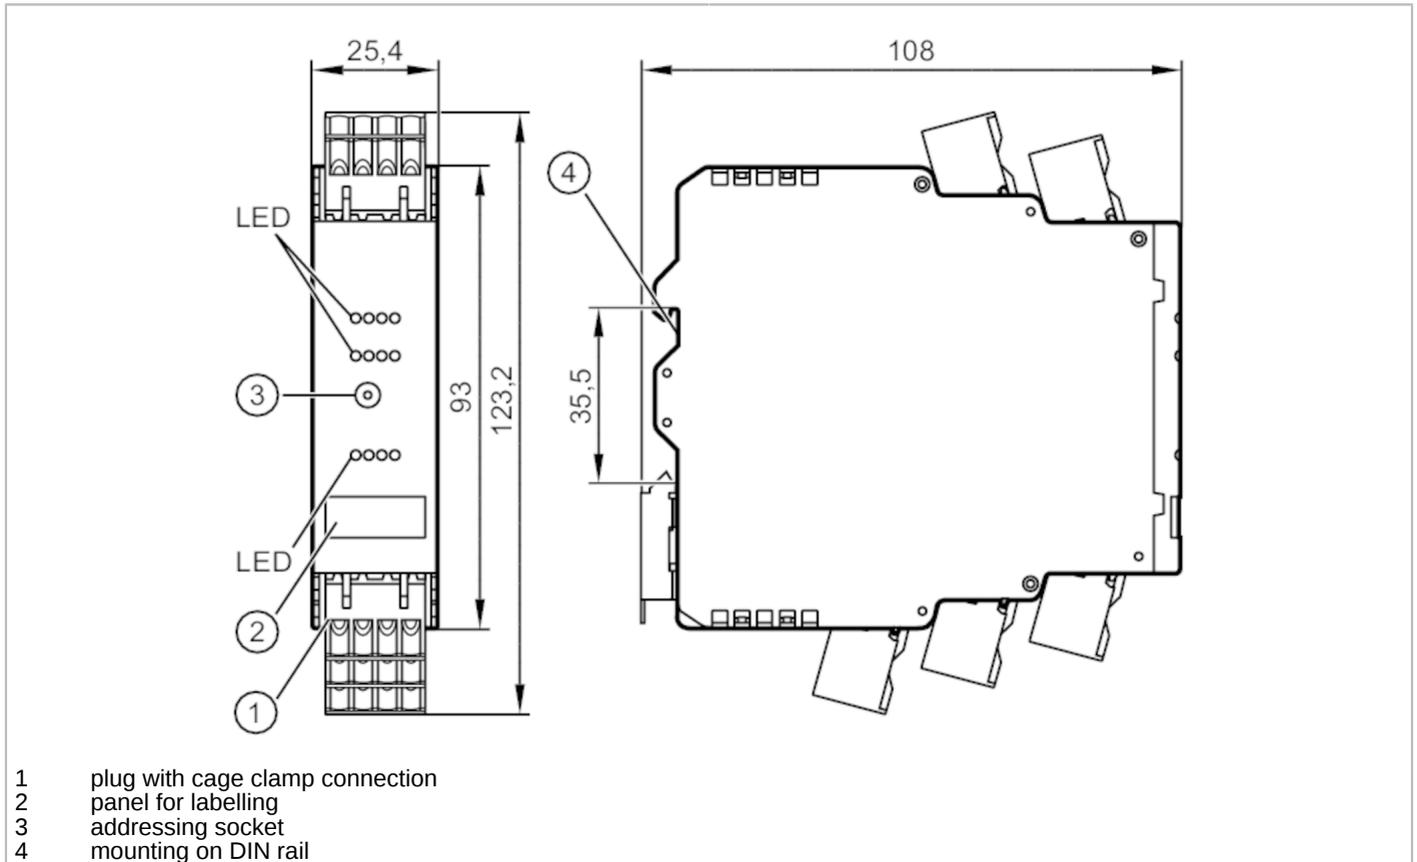

Application	
Application	Installation in control cabinets
Electrical data	
Operating voltage [V]	18...31.6 DC
Max. current consumption from AS-i [mA]	30
Additional voltage supply [V]	20...30 DC; (AUX)
Max. current consumption from additional supply [mA]	1100; (AUX)
Integrated watchdog	yes
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 4; Number of relay outputs: 2
Inputs	
Number of digital inputs	4
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs	AUX
Power supply [V]	18...30; (DC)
Max. total current rating of inputs [mA]	1000
Input current High [mA]	6...10
Input current Low [mA]	0...2



## AS-Interface control cabinet module

SmartL25 4DI AUX 2DO R C

Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes

### Outputs

Voltage range DC	[V]	24
Voltage range AC	[V]	10...240
Max. current load per output	[mA]	6000; (ohmic resistance)
Max. current load outputs total	[A]	6; (ohmic resistance)
Number of relay outputs		2
Short-circuit proof		no
Electrically separated		yes

### Operating conditions

Ambient temperature	[°C]	-25...65
Storage temperature	[°C]	-25...75
Max. relative air humidity	[%]	90; (non condensing)
Max. height above sea level	[m]	2000
Protection		IP 20
Protection rating terminals		IP 20
Pollution degree		2

### Tests / approvals

EMC	EN 62026-2	
	EN 61000-6-2	
	EN 61000-6-3	
MTTF	[years]	320
Notes	The device shall be supplied from an isolating source.; This voltage source must have a secondary UL-listed fuse (see enclosed sheet).; Alternatively, a class 2 power supply can be used to supply AUX.	

### AS-i classification

AS-i version	2.11; 3.0				
AS-i addressing	addressing socket				
Extended addressing mode	yes				
AS-i master profile	M2; M3; M4				
AS-i profile	S-7.A.E				
AS-i I/O configuration	[hex]	7			
AS-i ID code	[hex]	A.E			
Assignment of the data bits	data bit	D0	D1	D2	D3
	input	I-1	I-2	I-3	I-4
	Output	O-1	O-2	-	-

### Mechanical data


Weight	[g]	183.85
Housing		housing for DIN rail mounting
Type of mounting		mounting on DIN rail
Dimensions	[mm]	123.2 x 25.4 x 108
Materials		plastics; PC-GF20



## AS-Interface control cabinet module

SmartL25 4DI AUX 2DO R C

Displays / operating elements		
Display	switching status	LED, yellow I1...I4, O1...O2
	operation	LED, green AS-i, AUX
	errors	LED, red
Accessories		
Items supplied	cage clamps	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
pin headers: 4 x ; Spacing: 5.0 mm		
Connection		

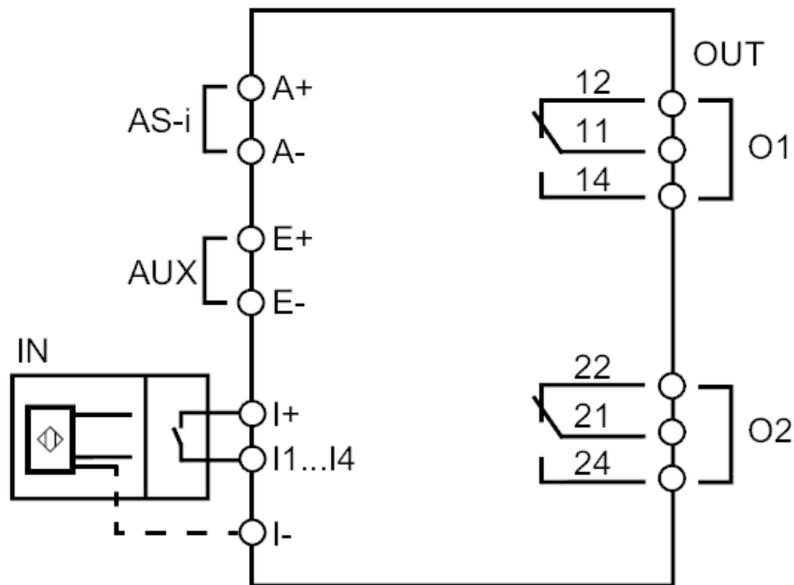

A+	AS-i +
A-	AS-i -
E+	external voltage supply for sensors + 24 V (AUX)
E-	external voltage supply for sensors + 0 V (AUX)
I+	Sensor supply +24V
I-	Sensor supply 0V
I1...I4	switching input sensor 1...4
O1...O2	switching output relay 1...2
11	relay O1 changeover contact, common
12	relay O1 changeover contact, normally closed contact
14	relay O1 changeover contact, normally open
21	relay O2 changeover contact, common
22	relay O2 changeover contact, normally closed contact
24	relay O2 changeover contact, normally open