

# AC servo motor BSH - 3.4 N.m -2500 rpm - keyed shaft - without brake - IP50

BSH1002P11A2A

Discontinued on: 9 Feb 2023

! Discontinued

EAN Code: 3389118139206

#### Main

wain								
Device short name	BSH							
Product or component type	Servo motor							
Maximum mechanical speed	6000 rpm							
Continuous stall torque	4.5 N.m for LXM15LD21M3, 230 V, single phase							
	3.4 N.m for LXM15LD13M3, 230 V, three phase							
	3.4 N.m for LXM15LD10N4, 230 V, three phase							
	3.4 N.m for LXM15LD10N4, 400 V, three phase							
	3.4 N.m for LXM15LD10N4, 480 V, three phase							
	5.8 N.m for LXM15LD17N4, 400 V, three phase							
	5.8 N.m for LXM15LD17N4, 480 V, three phase							
	5.8 N.m for LXM15LD21M3, 230 V, three phase							
	5.5 N.m for LXM05AD17M3X, 200240 V, three phase							
	5.5 N.m for LXM05AD22N4 at 6 A, 380480 V, three phase							
	5.5 N.m for LXM05AD28M2 at 6 A, 200240 V, single phase							
	5.5 N.m for LXM05BD17M3X, 200240 V, three phase							
	5.5 N.m for LXM05BD22N4, 380480 V, three phase							
	5.5 N.m for LXM05BD28M2, 200240 V, single phase							
	5.5 N.m for LXM05CD17M3X, 200240 V, three phase							
	5.5 N.m for LXM05CD22N4, 380480 V, three phase							
	5.5 N.m for LXM05CD28M2, 200240 V, single phase							
	5.8 N.m for LXM32.D18N4 at 6 A, 400 V, three phase							
	5.8 N.m for LXM32.D18N4 at 6 A, 480 V, three phase							
Peak stall torque	9.39 N.m for LXM15LD21M3, 230 V, single phase							
	5.6 N.m for LXM15LD13M3, 230 V, three phase							
	8 N.m for LXM15LD10N4, 230 V, three phase							
	8 N.m for LXM15LD10N4, 400 V, three phase							
	8 N.m for LXM15LD10N4, 480 V, three phase							

8 N.m for LXM15LD10N4, 480 V, three phase 12.13 N.m for LXM15LD17N4, 400 V, three phase 12.13 N.m for LXM15LD17N4, 480 V, three phase 14.79 N.m for LXM15LD21M3, 230 V, three phase 11.23 N.m for LXM05AD17M3X, 200...240 V, three phase 13.92 N.m for LXM05AD22N4 at 6 A, 380...480 V, three phase 16 N.m for LXM05AD28M2 at 6 A, 200...240 V, single phase 11.23 N.m for LXM05BD17M3X, 200...240 V, three phase 13.92 N.m for LXM05BD22N4, 380...480 V, three phase 16 N.m for LXM05BD28M2, 200...240 V, single phase 11.23 N.m for LXM05CD17M3X, 200...240 V, three phase 13.92 N.m for LXM05CD22N4, 380...480 V, three phase 16 N.m for LXM05CD28M2, 200...240 V, single phase 18.3 N.m for LXM32.D18N4 at 6 A, 400 V, three phase 18.3 N.m for LXM32.D18N4 at 6 A, 480 V, three phase

Life Is On Schneider 1 Jul 2025

#### Nominal output power

950 W for LXM15LD21M3, 230 V, single phase 950 W for LXM15LD21M3, 230 V, three phase 780 W for LXM05AD28M2, 200...240 V, single phase 780 W for LXM05BD28M2, 200...240 V, single phase 780 W for LXM05CD28M2, 200...240 V, single phase 1400 W for LXM05AD22N4, 380...480 V, three phase 1400 W for LXM05BD22N4, 380...480 V, three phase 1400 W for LXM05CD22N4, 380...480 V, three phase 1600 W for LXM15LD10N4, 400 V, three phase 1700 W for LXM15LD17N4 at 6 A, 400 V, three phase 1950 W for LXM15LD17N4 at 6 A, 480 V, three phase 2150 W for LXM15LD10N4, 480 V, three phase 780 W for LXM05AD17M3X, 200...240 V, three phase 780 W for LXM05BD17M3X, 200...240 V, three phase 780 W for LXM05CD17M3X, 200...240 V, three phase 840 W for LXM15LD13M3, 230 V, three phase 890 W for LXM15LD10N4, 230 V, three phase 1700 W for LXM32.D18N4 at 6 A, 400 V, three phase 1700 W for LXM32.D18N4 at 6 A, 480 V, three phase

#### Nominal torque

4.5 N.m for LXM15LD21M3, 230 V, single phase 4.96 N.m for LXM05AD28M2, 200,...240 V. single phase 4.96 N.m for LXM05BD28M2, 200...240 V, single phase 4.96 N.m for LXM05CD28M2, 200...240 V, single phase 3.4 N.m for LXM15LD10N4, 230 V, three phase 3.4 N.m for LXM15LD10N4, 400 V, three phase 3.4 N.m for LXM15LD10N4, 480 V, three phase 3.4 N.m for LXM15LD13M3, 230 V, three phase 3.7 N.m for LXM15LD17N4, 480 V, three phase 4 N.m for LXM15LD17N4 at 6 A, 400 V, three phase 4.4 N.m for LXM05AD22N4 at 6 A, 380...480 V, three phase 4.4 N.m for LXM05BD22N4, 380...480 V, three phase 4.4 N.m for LXM05CD22N4, 380...480 V, three phase 4.96 N.m for LXM05AD17M3X, 200...240 V, three phase 4.96 N.m for LXM05BD17M3X, 200...240 V, three phase 4.96 N.m for LXM05CD17M3X, 200...240 V, three phase 5.8 N.m for LXM15LD21M3, 230 V, three phase 4 N.m for LXM32.D18N4 at 6 A, 400 V, three phase 4 N.m for LXM32.D18N4 at 6 A, 480 V, three phase

#### Nominal speed

3000 rpm for LXM05AD22N4, 380...480 V, three phase 3000 rpm for LXM05BD22N4 at 6 A, 380...480 V, three phase 3000 rpm for LXM05CD22N4, 380...480 V, three phase 1500 rpm for LXM05AD17M3X, 200...240 V, three phase  $1500\ rpm$  for LXM05BD17M3X, 200...240 V, three phase 1500 rpm for LXM05CD17M3X, 200...240 V, three phase 4500 rpm for LXM15LD10N4, 400 V, three phase 6000 rpm for LXM15LD10N4, 480 V, three phase 4000 rpm for LXM32.D18N4 at 6 A, 400 V, three phase 4000 rpm for LXM32.D18N4 at 6 A, 480 V, three phase 1500 rpm for LXM05AD28M2, 200...240 V, single phase 1500 rpm for LXM05BD28M2, 200...240 V, single phase 1500 rpm for LXM05CD28M2, 200...240 V, single phase 2000 rpm for LXM15LD21M3, 230 V, single phase 2000 rpm for LXM15LD21M3, 230 V, three phase 2500 rpm for LXM15LD10N4, 230 V, three phase 2500 rpm for LXM15LD13M3, 230 V, three phase 4000 rpm for LXM15LD17N4, 400 V, three phase 5000 rpm for LXM15LD17N4 at 6 A, 480 V, three phase

#### **Product compatibility**

LXM05BD28M2 at 200...240 V single phase LXM05CD28M2 at 200...240 V single phase LXM15LD21M3 at 230 V single phase LXM15LD13M3 at 230 V three phase LXM15LD10N4 at 400 V three phase LXM05AD17M3X at 200...240 V three phase LXM05BD17M3X at 200...240 V three phase LXM05CD17M3X at 200...240 V three phase LXM15LD10N4 at 230 V three phase LXM15LD10N4 at 480 V three phase LXM15LD21M3 at 230 V three phase LXM05AD22N4 at 380...480 V three phase LXM05BD22N4 at 380...480 V three phase LXM05CD22N4 at 380...480 V three phase LXM15LD17N4 at 400 V three phase LXM15LD17N4 at 480 V three phase LXM32.D18N4 at 400 V three phase LXM32.D18N4 at 480 V three phase

LXM05AD28M2 at 200...240 V single phase

Shaft end	Keyed
IP degree of protection	IP50 standard
Speed feedback resolution	131072 points/turn
Holding brake	Without
Mounting support	International standard flange
Electrical connection	Rotatable right-angled connectors
Complementary	
Range compatibility	Lexium 15 Lexium 32
	Lexium 05
supply voltage max	480 V
Network number of phases	Three phase
Continuous stall current	4.8 A
maximum continuous power	2.51 W
Maximum current Irms	17.1 A for LXM15LD13M3 17.1 A for LXM15LD21M3 17.1 A for LXM15LD10N4 17.1 A for LXM05LD17N4 17.1 A for LXM05AD28M2 17.1 A for LXM05AD2PM4 17.1 A for LXM05AD22N4 17.1 A for LXM05BD28M2 17.1 A for LXM05BD17M3X 17.1 A for LXM05BD17M3X 17.1 A for LXM05BD17M3X 17.1 A for LXM05BD17M3X 17.1 A for LXM05CD2N4 17.1 A for LXM05CD28M2 17.1 A for LXM05CD17M3X 17.1 A for LXM05CD17M3X 17.1 A for LXM05CD17M3X 17.1 A for LXM05CD17M3X
Maximum permanent current	17.1 A
Switching frequency	8 kHz
Second shaft	Without second shaft end
Shaft diameter	19 mm
Shaft length	40 mm
key width	30 mm
Feedback type	Single turn SinCos Hiperface
Motor flange size	100 mm
Number of motor stacks	2
Torque constant	1.21 N.m/A at 120 °C
Back emf constant	77 V/krpm at 120 °C
Number of motor poles	4.0
Rotor inertia	2.31 kg.cm²
Stator resistance	2.4 Ohm at 20 °C
Stator inductance	6.75 mH at 20 °C
Stator electrical time constant	5.29 ms at 20 °C
Maximum radial force Fr	620 N at 4000 rpm 690 N at 3000 rpm 790 N at 2000 rpm 990 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr

type of cooling	Natural convection
Length	204.5 mm
Centring collar diameter	95 mm
centring collar depth	3.5 mm
Number of mounting holes	4
Mounting holes diameter	9 mm
Circle diameter of the mounting holes	115 mm
Net weight	5.9 kg
Sizing reference	BSH1002P
Network number of phases	3
Accuracy error [angular]	1.4 °
Temperature copper hot	120 °C
Temperature magnet hot	100 °C
Temperature magnet rt	20 °C

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	22 cm
Package 1 Width	19.5 cm
Package 1 Length	57 cm
Package 1 Weight	6.722 kg

# **Contractual warranty**

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	2355
Environmental Disclosure	Product Environmental Profile

#### **Use Better**

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration
PVC free	Yes

#### **Use Again**


○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

### BSH1002P11A2A

### **Dimensions Drawings**

### **Servo Motors Dimensions**

### **Example with Straight Connectors**

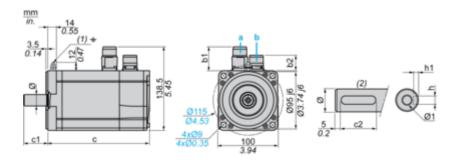

- a: Power supply for servo motor brake
- **b**: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2	Draito)	brake)						00.01.0
39.5	25.5	39.5	39.5	205	236	40	30	6 N9	3.5 <sup>+0.1</sup> <sub>0</sub>	19 k6	M6 x 16

Dimensions in in.

		Rotatable	·	c (without	c (with	c1	c2	h	h1	Ø	Ø1 for
b1	b2	b1	b2	brake)	brake)						screws
1.55	1.00	1.55	1.55	8.07	9.29	1.57	1.18	0.24 N9	0.14 <sup>+0.1</sup> 0	0.75 k6	M6 x 0.63

## **Product datasheet**


### BSH1002P11A2A

#### Performance Curves

### 400 V 3-Phase Supply Voltage

### **Torque/Speed Curves**

Servo motor with LXM32•D18N4 servo drive




- **X** Speed in rpm
- ${f Y}$  Torque in Nm
- 1 Peak torque
- 2 Continuous torque

### 480 V 3-Phase Supply Voltage

#### **Torque/Speed Curves**

Servo motor with LXM32•D18N4 servo drive



- X Speed in rpm
- ${\bf Y}$  Torque in Nm
- 1 Peak torque
- 2 Continuous torque