


Product description **M5 Female angled panel mount connector, Contacts: 3, shieldable, solder, IP68, UL 2238, Rear mounting**

Area **M5**
Series **707**
Part no. **86 8006 1101 00003**


Illustration




Conductor layout

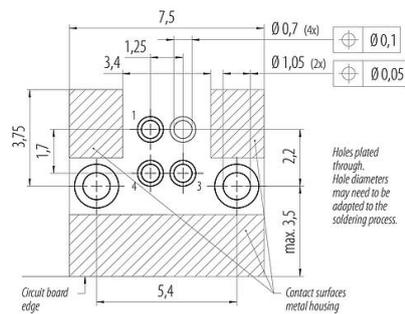

Scale drawing

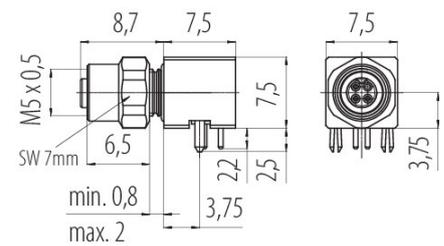

Contact arrangement (Plug-in side)



Technical data

General features

Part no.	86 8006 1101 00003
Connector design	Female angled panel mount connector
Version	Connector socket angled
Connector locking system	screw
Termination	solder
Degree of protection	IP68

Product description	M5 Female angled panel mount connector, Contacts: 3, shieldable, solder, IP68, UL 2238, Rear mounting
Area	M5
Series	707
Part no.	86 8006 1101 00003

Temperature range from/to	-25 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	3.29
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	1500 V
Rated current	1.0 A
Insulation resistance	> 10 ⁸ Ω
Pollution degree	3
Overvoltage category	III
Insulating material group	III
EMC compliance	shieldable

Material

Housing material	CuZn (Brass nickel plated)
Contact body material	LCP
Contact material	CuZn (brass) / CuSn (bronze)
Contact plating	Au (gold)
Locking material	CuZn (brass)
REACH SVHC	None (No pollutants)
SCIP number	SCIP-number not available

Authorization/approvals

Approvals	UL 2238
-----------	---------

Classifications

ETIM 9.0	EC003569
----------	----------

Declarations of conformity

Low Voltage Directive	2011/65/EU (EN 50581:2012)
RoHS Directive	2011/65/EU (EN 50581:2012)

Product description	M5 Female angled panel mount connector, Contacts: 3, shieldable, solder, IP68, UL 2238, Rear mounting
Area	M5
Series	707
Part no.	86 8006 1101 00003

General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 50 cNm).