

**LIFETIME
WARRANTY***

OX 6062

OX 6152

OX 6202



A range of laboratory oscilloscopes, compact multifunction diagnostic tools!

- Three complementary tools in one, for record capacity and efficiency: **OSCILLOSCOPE; RECORDER-MULTIMETER; FFT ANALYZER.**
- Sampling rate: 1 GS/s in one-shot and 50 GS/s in ETS mode
- 2 x 300 V Cat II measurement channels and up to 4 curves on screen
- Standard real-time FFT analysis and calculation functions on channels
- 2 independent 200 kHz, 8,000-counts, TRMS digital multimeters
- Colour or black & white LCD screen with tactile faceplate
- 28 direct control keys, "Windows-like" menus and graphical commands (touch screen)
- Multi-interface communication connector: RS232, USB and Ethernet with WEB server (depending on accessories)
- Storage on removable SD Card* (*depending on model)



**OX 6000 oscilloscopes,
streamlined for high performance!**

UNIQUE STREAMLINED DESIGN


Easy to handle, compact and lightweight, the OX6000 instruments combine the functions of a recorder-multimeter and an FFT analyzer.



DIRECT ACCESS AND INSIGHT NAVIGATION

With **only 28 direct access keys** with different modes and parameters, its ergonomics and its Windows-Like universal menus, available in 5 languages, the oscilloscope is extremely easy to use.

Each of the keys on the front panel enables immediate selection or adjustment (time base, printing ...)





EXTENSION OF MEMORY CAPACITY

When equipped with an SD Card, users can store all the data (reference curves, instrument settings, screenshots) up to 2 GB. Its adapter makes transferring data to a PC particularly simple.

GRAPHICAL SETTINGS

The touch screen and its magnetised stylus also make it possible to access your settings directly on-screen using graphic elements that you can move, such as trace position, trigger level, cursors or zoom.

A display zone at the bottom right of the screen constantly displays the current setting, e.g. the value of cursor 2.

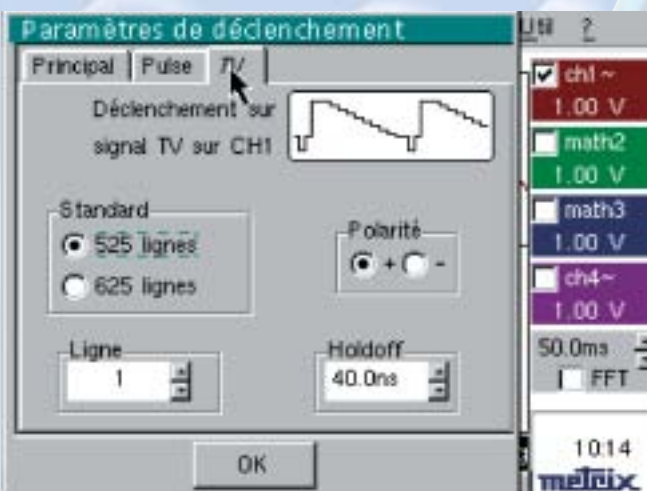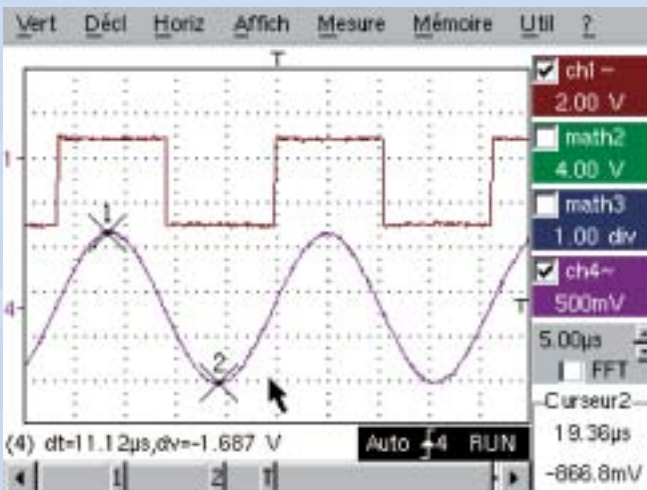

SIGNAL ACQUISITION


In terms of performance, the OX 6000 instruments provide fast sampling and high resolution with their **10-bit / 1 Gs/s converter**, sampling at 50 Gs/s on periodic signals, and 2 ns transient capture, which avoids under-sampling.

- Large input dynamic: 2.5 mV to 10 V/div.,
- Advanced activation functions (Pulse, TV, associated signal..), on a single screen.
- Filters: 15 MHz, 1.5MHz and 5kHz, making it possible to adapt to various applications: electrical energy, electrical engineering, automotive, medical, physical measurements, ...

**OX 6000 oscilloscopes,
streamlined for high performance!**

EASILY ACCESSIBLE HIGH PERFORMANCE

The zoom

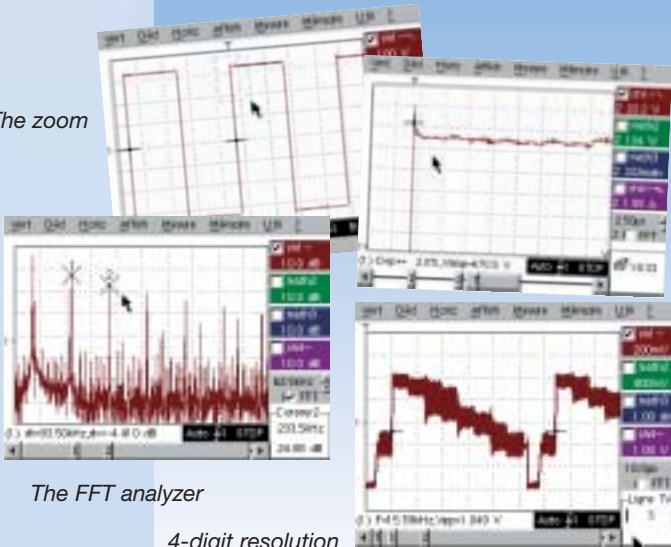

The FFT analyzer

4-digit resolution

ADVANTAGES OF THE 10-BIT CONVERSION

● Zoom

The **vertical resolution** of the 10-bit converter, which is **4 times higher** than that of a traditional 8-bit converter, is operated with graphic Winzoom.

● FFT ANALYZER

Calculated on **2,500 samples**, the FFT analysis can be adjusted automatically by the Autoset key. The **10-bit conversion** improves the dynamic to 60 dB and provides **optimum accuracy** for frequency and amplitude measurements.

● The 10-bit converter provides also a **4-digit resolution** and unrivalled accuracy.

AUTOMATIC MEASUREMENTS

The **19 automatic measurements** are displayed directly by pressing a key.

For greater reliability and accuracy, a specific measurement zone can be selected by framing with the manual cursors that are accessed via a dedicated key or using the stylus on the touch screen.

COMMUNICATIONS EXPERT

Thanks to an **Ethernet (10 MB transfer)** interface and a **Web server**, the OX6000 products provide new working tools that are very good value-for-money.


● Printing on **network printers**

● Remote management

● **Exchange of files** on FTP server

In addition, your instrument can be constantly upgraded by free downloading new functions on the support site.

Ethernet configuration

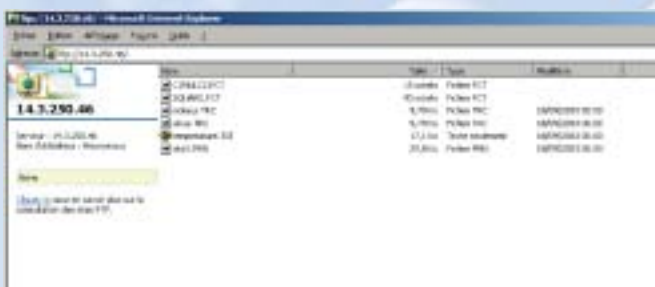

Web Server and
FTP file exchange

TECHNICAL FEATURES

OX 6062

OX 6152

OX 6202

USER INTERFACE

Type of display	5" 7 colour or B&W* LCD (115 x 86 mm) - 320 x 240 - CCFL backlighting (adjustable standby)
Display of curves on-screen	4 curves + 4 references
Controls	28 direct access controls & shortcuts - 1 M/A key and standby Touch screen - "Windows-like" menus and graphic controls 5 languages, on-line menus & help (English, French, German, Italian and Spanish)

VERTICAL

Bandwidth	60 MHz	150 MHz	200 MHz
		15 MHz bandwidth limiter, 1.5 MHz or 5 kHz	
Number of channels		2 channels - 300 V/CAT II	
Vertical sensitivity		15 x 2.5 mV-100 V/div calibres (± 2 %)	
Vertical Zoom		One Click Winzoom system (10-bit converter and graphic zoom directly on-screen) - x 16 max	
Probe factors		1/10/100/1,000 or any scale - definition of measurement unit	

HORIZONTAL

Scanning speed	35 x 1 ns calibres/div et 200 s/div. - 100ms to 200s/div Roll Mode (± 0.1%)
Horizontal Zoom	One Click Winzoom system (graphic zoom direct on-screen) - x 5 maximum

ACTIVATION

Mode	Auto, Normal, Single shot, Auto Level 50%/CH1, CH2, EXT, LINE Front, Pulse width (20 ns-20 s), field TV or line TV, Hold -Off
------	--

DIGITAL MEMORY

Maximum sampling	10 bits - 50 Gs/s in Repetitive - 1 Gs/s in single shot 2,500 samples per channel GLITCH Mode Duration ≥ 2 ns/Envelope, Averaging (Factors 2 to 64)/ XY Mode
------------------	--

OTHER FUNCTIONS

AUTOSET	Complete AUTOSET in less than 5 s, with recognition of channels FFT (Lin or Log scales) - Functions +, -, x/with management of coefficients & units Measurements: 2 or 3 cursors & 19 automatic measurements - 10-bit resolution, 4-digit display
---------	---

MULTIMETER (except OX6202E-C) 2 channels - 8,000 samples + min/max bargraph - TRMS - Timestamped graphic recording (5 min to 31 days)

AC, DC, AC + DC voltage	400.0 mV to 300.0 VRMS or 400.0 VDC - VDC accuracy 0.5%L+5D - bandwidth 200 kHz
Resistance	80.00 Ω to 32.00 MΩ - accuracy 0.5%L+ 5D - Fast continuity test 10 ms
Other measurements	Capacities 5.000 nF to 5.000 mF/Frequency 200.0 MHz/Temperature (Pt100)/Diode test 3.3 V

REMOVABLE STORAGE MEDIUM Storage on SD Card up to 2 GB - supplied with minimum 512 MB card (SD Card version only)

GENERAL SPECIFICATIONS

Network screen printout (standard), RS232 (standard) or Centronics (optional accessory)	11 B&W or Colour Drivers: IBM Proprinter, Epson ESC/P, Canon HP PCL, Seiko DPU411, Postscript Image Files: ".BMP" approx. 10 KB, ".GIF" approx. 5 KB (storage, RS232 transfer or Ethernet)
PC Communication	10 MB local Ethernet, RS 232 (maxi 115 kbs) or USB (option) - 10 MB remote Ethernet and web server "Sx-Metro" PC software (optional)
Mains supply	Adjustable standby 98-264 V multi-voltage / 47-63 Hz / < 15 W - Adjustable cable
Mechanical features	230 (h) x 185 (l) x 180 (d) mm - 1.4 kg
Guarantee/Origin	3 years/France

*: Applicable to the SD Card versions - See application conditions at www.chauvin-arnoux.com

TO ORDER:

OX6062E-M: Digital oscilloscope, 2 x 60 MHz, monochrome
OX6062E-C: Digital oscilloscope, 2 x 60 MHz, colour
OX6152E-C: Digital oscilloscope, 2 x 150 MHz, colour
OX6202E-C: Digital oscilloscope, 2 x 200 MHz, colour
OX6062E-CSD: Digital oscilloscope, 2 x 60 MHz, SD, colour
OX6062E-MSD: Digital oscilloscope, 2 x 60 MHz, SD, monochrome
OX6152E-CSD: Digital oscilloscope, 2 x 150 MHz, SD, colour
OX6202E-CSD: Digital oscilloscope, 2 x 200 MHz, SD, colour

Accessories supplied:

2 switchable probes 1/1 - 1/10 (depending on model, 1 RS232 cable, 1 crossed Ethernet cable, 1 power supply cable, 1 operating manual and 1 programming manual.

Optional accessories:

HX0079: SD memory card + SD-USB adapter
HX0080: SD-USB adapter
HX0003: Safety probe, 1/10, 150 MHz, 400 V
HX0004: Safety probe, 1/10, 250 MHz, 1,000 V
HX0210: Standard probe, 1/1, 1/10, 100 MHz, 300 V CAT II
HX0220: Standard probe, 1/1, 1/10, 200 MHz, 300 V CAT II
SX-METRO/P: SX-METRO kit



FRANCE
Chauvin Arnoux
190, rue Championnet
75876 PARIS Cedex 18
Tel: +33 1 44 85 44 85
Fax: +33 1 46 27 73 89
info@chauvin-arnoux.fr
www.chauvin-arnoux.fr

UNITED KINGDOM
Chauvin Arnoux Ltd
Waldeck House - Waldeck Road
MAIDENHEAD SL6 8BR
Tel: +44 1628 788 888
Fax: +44 1628 628 099
info@chauvin-arnoux.co.uk
www.chauvin-arnoux.co.uk

MIDDLE EAST
Chauvin Arnoux Middle East
P.O. BOX 60-154
1241 2020 JAL EL DIB (Beyrouth) LEBANON
Tel: +961 1 890 425
Fax: +961 1 890 424
camie@chauvin-arnoux.com
www.chauvin-arnoux.com

For assistance and ordering