

Autotransformer AIM 16/8




Advantages

- Low weight and small size (compared to isolating transformers)
- Integrated short circuit and overload protection
- Very high efficiency
- Very good moisture protection and low noise thanks to XtraDenseFill resin encapsulation (AIM 1.8/8 - AIM 5.0/2.5)
- Screw terminals under cover with strain relief

Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

Sample application

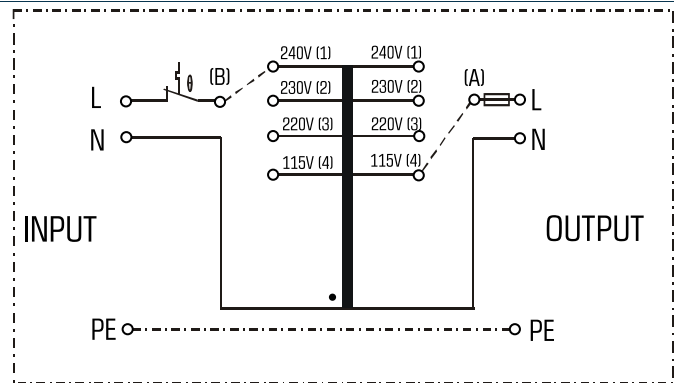

Standards

Autotransformer
 to: VDE 0570 Part 2-13, DIN EN 61558-2-13, EN 61558-2-13,
 IEC 61558-2-13


Approvals



Autotransformer AIM 16/8

Electrical data	
Type	
AIM 16/8	
Input	
Rated input voltage	115 Vac/220 Vac 230 Vac/240 Vac
Rated frequency	50 - 60 Hz
Output	
Rated output voltage	115 Vac/220 Vac 230 Vac/240 Vac
Rated output current	8.00 (PRI 115 / SEC 220, 230, 240);
	16.00 (PRI 115 / SEC 115);
	16.00 (PRI 220, 230, 240 / SEC 115, 220, 230, 240)
	21.00 W
No-load loss (typ.)	21.00 W
Environment	
Ambient temperature max.	40 °C
Safety and protection	
Type	
Class of Insulation System	B
Protection index	IP 20
Safety class	I
Short circuit strength	non-inherently short-circuit proof
Order numbers	
Order Number	AIM 16/8

Mechanical data	
Type	
AIM 16/8	
Terminal and mounting	
Fixing method	Fixing holes in the housing
Terminals	Screw-type terminal
Measures and weights	
Weight	16.50 kg

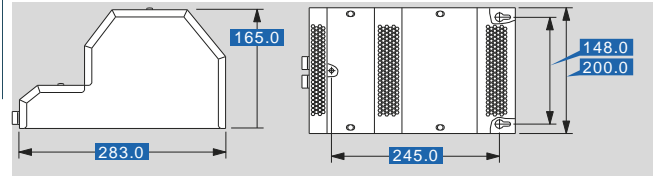

Subjects to change.