




Technical data

7913UADG/GNP42

High precision angular contact ball bearings

VISUAL (S)

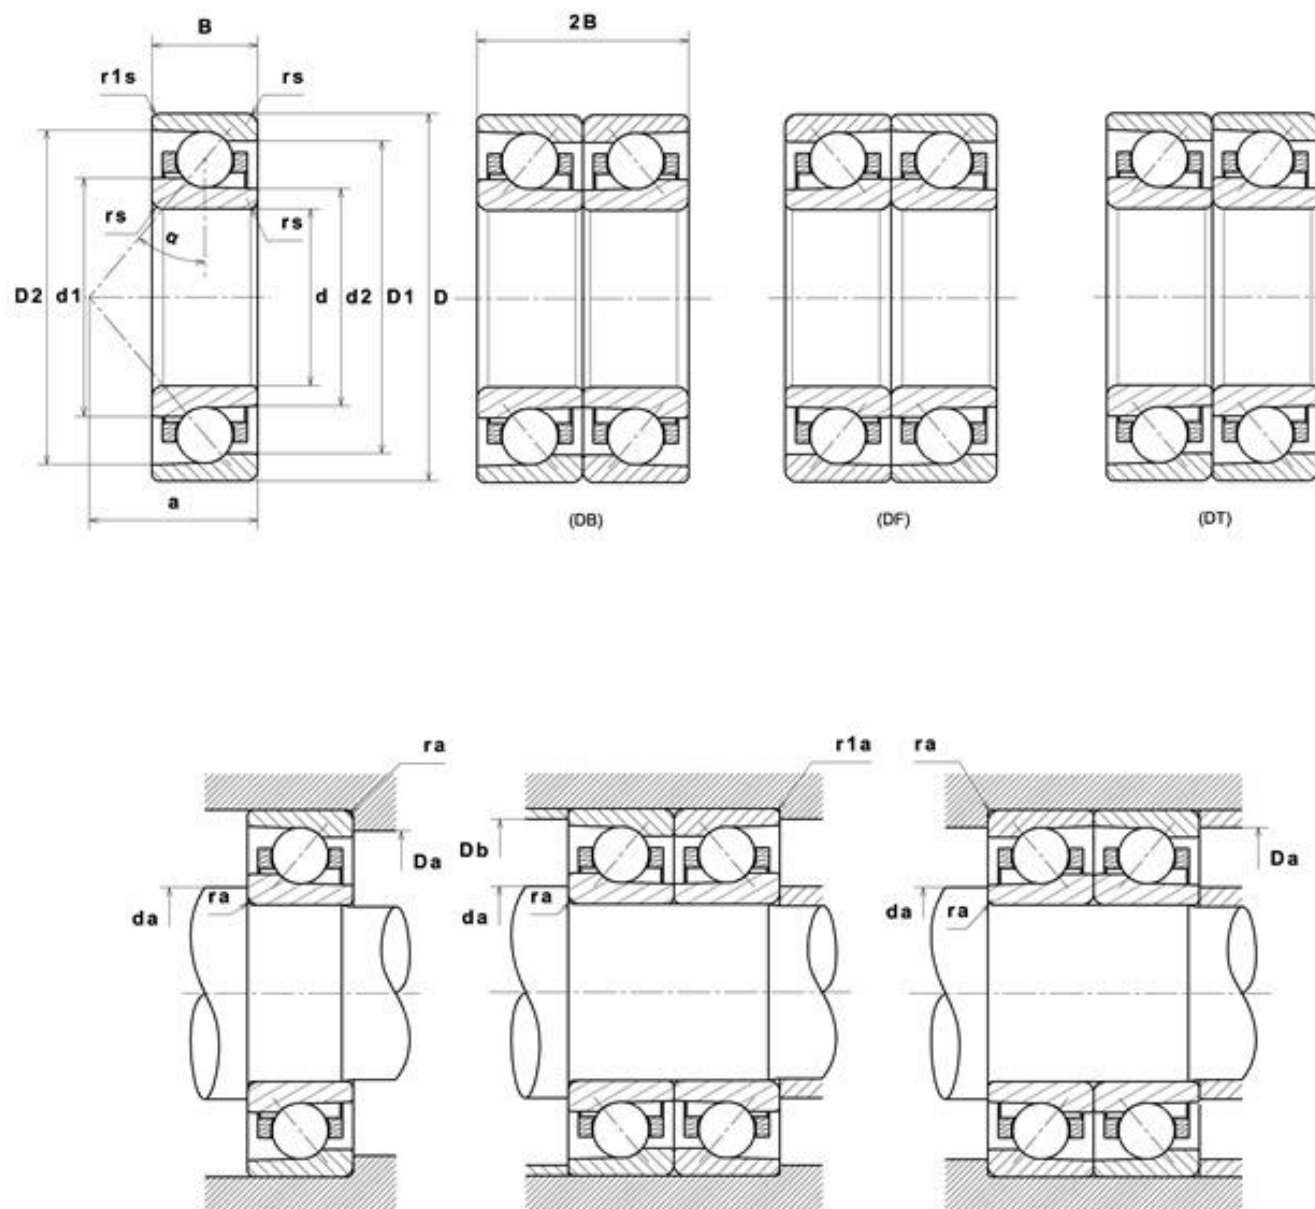

7913UADG/GNP42

High precision angular contact ball bearings

PRODUCT DEFINITION

Brand	NTN
d - Internal diameter	65 mm
D - External diameter	90 mm
B - Bearing/Inner ring width	13 mm
d1 - External diameter inner ring	73,7 mm
d2 - External diameter inner ring	71,8 mm
D1 - Inner diameter outer ring	81,4 mm
D2 - Inner diameter outer ring	85 mm
a - Charge load application point	24,6 mm
- Contact angle	25 °
rs - Min fillet radius	1 mm
r1s - Min fillet radius	0,6 mm
Precision class	P42
Mass	0,21 kg

PRODUCT PERFORMANCE

C - Dynamic load	21700000 mN
C0 - Static load	19700000 mN
f0 - Coefficient	16.8
N lim - Oil lubrication limit speed	127200 °/s
N lim - Grease lubrication limit speed	78600 °/s
Preload level	GN
Preload value	196000 mN
Axial rigidity	164.5 N/μm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

7913UADG/GNP42

High precision angular contact ball bearings

PRODUCT PERFORMANCE

Radial rigidity	350 N/μm
Tmin - Min operating temperature	253,15 °K
Tmax - Max operating temperature	393,15 °K

ABUTMENT

da min - Min shoulder diameter IR	70,5 mm
Da max - Max shoulder diameter OR	84,5 mm
Db max - Max OR shoulder diameter	85,5 mm
r1a - Max fillet radius	0,6 mm
ra max - Max shaft & housing fillet radius	1 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load
 $P = X.F_r + Y.F_a$

Series			e	Single or DT bearing arrangement				DB or DF arrangement				
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e		
				X	Y	X	Y	X	Y	X	Y	
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39	
		0.357	0.4				1.4		1.57		2.28	
		0.714	0.43				1.3		1.46		2.11	
		1.07	0.46				1.23		1.38		2	
		1.43	0.47				1.19		1.34		1.93	
		2.14	0.5				1.12		1.26		1.82	
		3.57	0.55				1.02		1.14		1.66	
		5.35	0.56						1.12		1.63	
		7.14	0.56				1		1.12		1.63	
	25°		0.68				0.41	0.87		0.92	0.67	1.41
	30°		0.8				0.39	0.76		0.78	0.63	1.24

Equivalent static radial load
 $P_o = X_o.F_r + Y_o.F_a$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X _o	Y _o	X _o	Y _o
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :
If $P_o < F_r$, then use $P_o = F_r$

