## **Diffuse mode sensor**



# CE

#### **Model Number**

# ML300-8-1200-IR/25/95/120

Diffuse mode sensor with M8, 4-pin metal connector


#### **Features**

- Miniature design ٠
- Easy to use ٠
- Infrared light •
- High operating range •
- 45° connector ٠


#### **Product information**

The ML300 series has a robust miniature housing and all the standard functional principles. Of particular note are the sensors with analog output, which return a value proportional to the distance. The 45° plug/cable connection ensures flexible mounting. An LED indicates a weak signal, e.g. due to dirt.

#### **Dimensions**

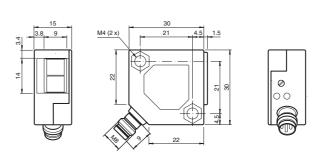

#### **Electrical connection**






#### **Pinout**



# Indicators/operating means

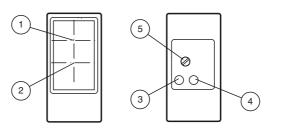

| 1 | Receiver               |        |  |
|---|------------------------|--------|--|
| 2 | Emitter                |        |  |
| 3 | Switching state        | yellow |  |
| 4 | Stability control      | green  |  |
| 5 | Sensing range adjuster |        |  |
|   |                        |        |  |

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" Pepperl+Fuchs Group www.pepperl-fuchs.com

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com




1

# **Technical data**

| recrimical data                      |                |  |  |
|--------------------------------------|----------------|--|--|
| General specifications               |                |  |  |
| Detection range                      |                | 0 1200 mm , adjustable   |  |
| Adjustment range                     |                | 250 1200 mm  |  |
| Reference target                     |                | standard white 200 mm x 200 mm   |  |
| Light source                         |                | IRED   |  |
| Light type                           |                | modulated infrared light , 880 nm  |  |
| Diameter of the light spot           |                | approx. 160 mm at a distance of 1200 mm  |  |
| Angle of divergence                  |                | approx. 8 °  |  |
| Ambient light limit                  |                |  |  |
| Continuous light                     |                | 10000 Lux  |  |
| Modulated light                      |                | 5000 Lux   |  |
| Accessories provided                 |                | Mounting bracket OMH-ML300-01<br>Screwdriver   |  |
| Indicators/operating means           |                |  |  |
| Function indicator                   |                | LED yellow: lights up when output is active<br>LEDgreen: Sufficient stability control                |  |
| Control elements                     |                | Detection range adjuster   |  |
| Electrical specifications            |                |  |  |
| Operating voltage                    | UB             | 10 30 V DC   |  |
| Ripple                               |                | max. 20 %  |  |
| No-load supply current               | I <sub>0</sub> | max. 20 mA   |  |
| Output                               |                |  |  |
| Switching type                       |                | light on / dark on   |  |
| Signal output                        |                | 2 PNP outputs, complementary, short-circuit protected, reverse<br>polarity protected, open collector |  |
| Switching voltage                    |                | max. 30 V DC   |  |
| Switching current                    |                | max. 0.1 A   |  |
| Voltage drop                         | Ud             | ≤ 2 V DC   |  |
| Switching frequency                  | f              | 1000 Hz  |  |
| Response time                        |                | 0.5 ms   |  |
| Ambient conditions                   |                |  |  |
| Ambient temperature                  |                | -25 55 °C (-13 131 °F)   |  |
| Mechanical specifications            |                |  |  |
| Protection degree                    |                | IP67   |  |
| Connection                           |                | M8 x 1 connector, 4-pin  |  |
| Material                             |                |  |  |
| Housing                              |                | PBT  |  |
| Optical face                         |                | glass pane   |  |
| Connector                            |                | metal  |  |
| Mass                                 |                | 18 g   |  |
| Compliance with standards and<br>ves | directi        | -  |  |
| Directive conformity                 |                |  |  |
| EMC Directive 2004/108/EC            |                | EN 60947-5-2:2007  |  |
| Standard conformity                  |                |  |  |
| Product standard                     |                | EN 60947-5-2:2007<br>IEC 60947-5-2:2007  |  |
| Shock and impact resistance          |                | EN 60947-5-7 30 g, 11 ms, all axes   |  |
| Vibration resistance                 |                | EN 60947-5-7, 10–55 Hz/1.5 mm amplitude, all axes  |  |
| Approvals and certificates           |                |  |  |

CCC approval

## **Curves/Diagrams**

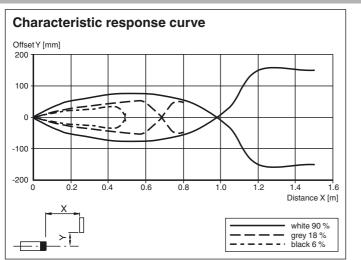

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" Pepperl+Fuchs Group

USA: +1 330 486 0001 www.pepperl-fuchs.com fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

CCC approval / marking not required for products rated  ${\leq}36$  V

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com

OMH-ML300-01 Bracket for mounting ML300 series sensors

OMH-ML300-02 Bracket for mounting ML300 series sensors on a 35 mm DIN rail


V31-GM-2M-PVC Female cordset, M8, 4-pin, PVC cable

V31-WM-2M-PVC Female cordset, M8, 4-pin, PVC cable

V31-WM-2M-PUR Female cordset, M8, 4-pin, PUR cable

V31-GM-2M-PUR Female cordset, M8, 4-pin, PUR cable

Other suitable accessories can be found at www.pepperl-fuchs.com

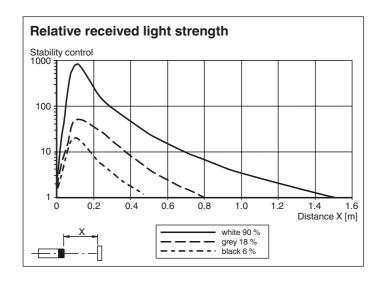

Pepperl+Fuchs Group www.pepperl-fuchs.com

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

fa-info@sg.pepperl-fuchs.com

Singapore: +65 6779 9091

