


Symaro™

Room sensors for relative humidity and temperature Modbus RTU

QFA2050/MO, QFA2050D/MO

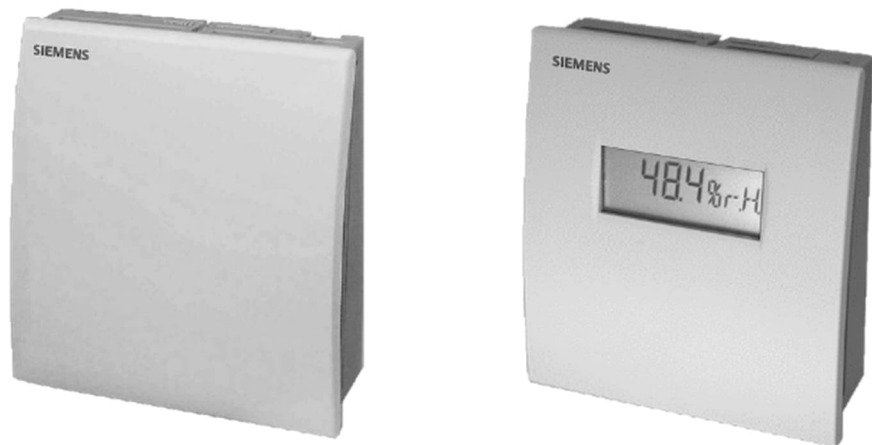

Room relative humidity and temperature sensors with Modbus communication

- Modbus RTU (RS-485)
- Relative humidity measuring accuracy of 3 % within the comfort range
- DIP switches set together with other controllers

Use

QFA2050/MO and QFA2050D/MO are used in ventilation and air conditioning plants to acquire room

- relative humidity
- temperature

The sensor is used as a measuring sensor for building automation and control systems or display units.

Technical design

The units are designed for wall mounting and can be deployed with most types of commercially available recessed conduit boxes. The cables can be introduced from the rear (concealed wiring), from below or above (surface-run wires) through knock-out openings.

Measured value display

QFA2050D provides the measured values on its LCD display. The following measured values are displayed, alternating at intervals of 5 s:

- Temperature: in °C or °F
- Humidity: in % r.h.

Type summary

Product number	SSN No.	Temperature measuring range	Humidity measuring range	Operating voltage	Output signal
QFA2050/MO	S55720-S508	-40...70 °C	0...100 %	AC 24 V ±20 %/ DC 13.5...35 V	Modbus RTU
QFA2050D/MO	S55720-S509	-40...70 °C	0...100 %	AC 24 V ±20 %/ DC 13.5...35 V	Modbus RTU

Ordering and delivery

When ordering, specify name and product number, for example: Room sensor QFA2050/MO.

Notes

Engineering

The following impacts the accuracy of measurement:

- Prevailing air flow
- Wall surface (rough, smooth)
- Wall texture (wood, plaster, concrete, brick)
- Wall type (interior, exterior).

This application-specific measuring inaccuracy is constant for an installed sensor after approx. 1 hour of operation and can be adjusted as needed in a higher system (e.g. controller).

No correction on the local LCD.

Powering the sensor requires a transformer for safety extra-low-voltage (SELV) with separate windings for 100 % duty. When sizing and protecting the transformer, comply with all local safety regulations.

When sizing the transformer, consider the sensor's power consumption.

For correct wiring, see the related device data sheets.

Observe all permissible line lengths.

Cable routing and cable selection

Note that when routing cables, the longer the cable runs and the closer the cables, the greater electrical interference. Use shielded cables in EMC-prone environments.
Twisted pair cables are required for both secondary supply lines and signal lines.

Mounting

Location	Inner wall (not exterior!) in the room to be air conditioned; not in niches, not behind curtains, not above or close to heat sources or shelves nor on walls with a chimney. Do not expose to direct light from spot lights or direct solar radiation. Install the sensor in the occupied space about 1.5 m above the floor and at least 50 cm from the next wall. Seal the end of the conduit at the sensor to prevent false measurements due to drafts through the conduit.
Mounting instructions	Mounting instructions are enclosed in the package.
Chemical vapors	The sensor is a highly sensitive measuring device and must be handled with care. Exposure to high concentrations of chemical vapors for longer periods may distort sensor readings.

NOTICE	
	Avoid direct contact with chemicals in any form. Do not touch sensitive components with bare hands or tools as this will negatively impact measuring accuracy.

CAUTION! Do not to apply voltmeters or ohmmeters directly to the sensing element.

Commissioning

Sensor functions can be checked 30 minutes after applying power.

Disposal

	This symbol or any other national label indicate that the product, its packaging, and, where applicable, any batteries may not be disposed of as domestic waste. Delete all personal data and dispose of the item(s) at separate collection and recycling facilities in accordance with local and national legislation. For additional details, refer to Siemens information on disposal .
---	---

Function	
Communication	Modbus RTU (RS-485)
Supported baud rate	9600; 19200; 38400; 57600; 76800; 115200
Transmission format	1-8-E-1; 1-8-O-1; 1-8-N-1; 1-8-N-2
Bus termination	120 ohm, jumper selection

For detailed information on specific functions, see Basic documentation (A6V12045847 *).

Power supply	
Operating voltage	AC 24 V $\pm 20\%$ or DC 13.5...35 V (SELV) or AC/DC 24 V class 2 (US)
Frequency	48...63 Hz at AC 24 V
External supply line protection	Fuse slow max. 10 A or Circuit breaker max. 13 A Characteristic B, C, D according to EN 60898 or Power source with current limitation of max. 10 A
Power consumption	≤ 1.5 VA

Functional data	
Humidity sensor	
Measuring range	0...100 % r.h.
Range of use	0...95 % r.h. (non-condensing)
Measuring accuracy at 23 °C and AC/DC 24 V in 0...95 % r.h. 30...70 % r.h.	± 5 % r.h. ± 3 % r.h.
Temperature dependency	≤ 0.1 % r.h./°C
Time constant	Approx. 20 s
Temperature sensor	
Measuring range	-40...70 °C
Range of use	-15...50 °C
Measuring accuracy at AC/DC 24 V in 23 °C 15...35 °C -35...50 °C	± 0.3 K (typical) ± 0.7 K ± 1 K
Time constant t_{63}	8.5 min

Ambient conditions and protection classification	
Protection degree of housing	IP30 according to EN 60529 in built-in state
Protection class	III according to EN 60730-1
Environmental conditions Storage • Climatic conditions – Temperature – Humidity • Mechanical conditions Transport • Climatic conditions – Temperature – Humidity • Mechanical conditions Operation • Climatic conditions – Temperature (housing with electronics) – Humidity • Mechanical conditions	IEC 60721-3-1 • Class 1K3 – -15...50 °C – < 95 % r.h. • Class 1M2 IEC 60721-3-2 • Class 2K3 – -25...70 °C – 0...95 % r.h. • Class 2M2 IEC 60721-3-3 • Class 3K5 – -15...50 °C – < 95 % r.h. • Class 3M2


Standards, directives and approvals	
Product standard	EN 60730-1, EN 60730-2-9, EN 61000-6-2, EN 61000-6-3 Automatic electrical controls for household and similar use
Electromagnetic compatibility (Applications)	For use in residential, commercial, light-industrial and industrial environments
EU conformity (CE)	A5W00138204A *)
RCM conformity	A5W00138207A *)
UL	UL 873, http://ul.com/database
Environmental compatibility	The product environmental declaration (A5W00128109A *) contains data on environmentally compatible product design and assessments (RoHS compliance, materials composition, packaging, environmental benefit, disposal).

General	
Cable lengths for measuring signals Perm. cable lengths	See data sheet for the device handling the signal
Electrical connections screw terminals	1 × 2.5 mm ² or 2 × 1.5 mm ²
Product life time	> 10 years
Materials and colors	
Housing front	ASA + PC, NCS S 0502-G (white) equates to RAL9010
Bottom section of housing	ASA + PC, NCS 2801-Y43R (grey) equates to RAL7035
Base	PC, NCS 2801-Y43R (grey) equates to RAL7035

General	
Sensor (complete assembly)	Silicone-free
Packaging	Corrugated cardboard
Weight including package	
QFA2050/MO	Approx. 141 g
QFA2050D/MO	Approx. 155 g


*) The documents can be downloaded from <http://siemens.com/bt/download>.

Connection terminals

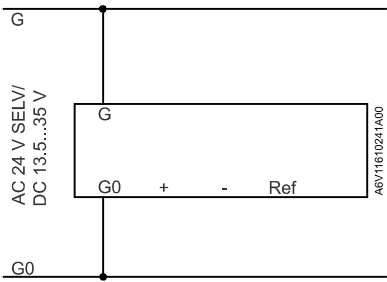

- G Operating voltage AC 24 V ±20 % or DC 13.5...35 V
- G0 GND
- + RS485 Modbus A
- RS485 Modbus B
- Ref GND_ISO

Dimensions

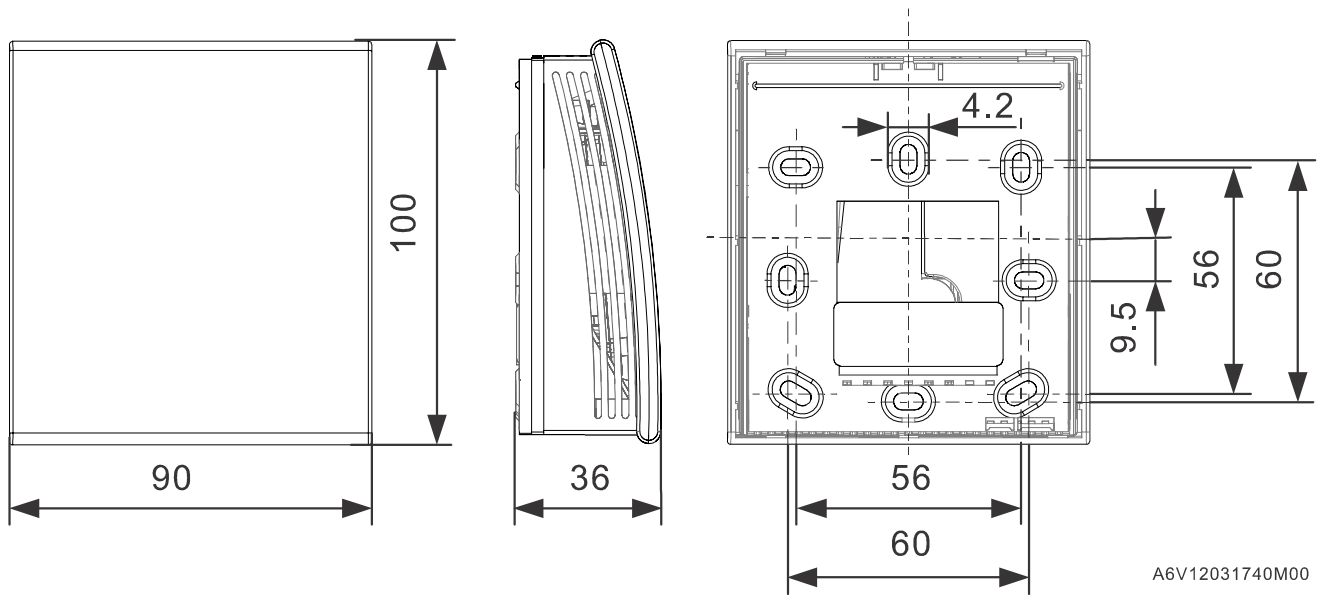

Dimensions in mm

Issued by
Siemens Switzerland Ltd
Smart Infrastructure
Global Headquarters
Theilerstrasse 1a
CH-6300 Zug
+41 58 724 2424
www.siemens.com/buildingtechnologies

© Siemens 2020
Technical specifications and availability subject to change without notice.

Document ID A6V12046135_en--_b
Edition 2024-08-30