SIEMENS

Data sheet

3RT2018-2AF02



Contactor, AC-3, 7.5 KW / 400 V, 1 NC, 110 V AC, 50 / 60 Hz, 3-pole, Size S00 Spring-type terminal

product brand name	SIRIUS
product designation	Power contactor
product designation	3RT2
General technical data	51(12
size of contactor	S00
	500
product extension	Ne
function module for communication	No
auxiliary switch	Yes
power loss [W] for rated value of the current	3 W
at AC in hot operating state at AC is bot operating state	
at AC in hot operating state per pole	1 W
without load current share typical	5.7 W
insulation voltage	600.1/
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
of main circuit rated value	6 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for safe isolation between	400 V
coil and main contacts according to EN 60947-1	
shock resistance at rectangular impulse	
• at AC	7,3g / 5 ms, 4,7g / 10 ms
shock resistance with sine pulse	
• at AC	11,4g / 5 ms, 7,3g / 10 ms
mechanical service life (switching cycles)	
 of contactor typical 	30 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
at AC-3 rated value maximum	690 V
 at AC-3e rated value maximum 	690 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated value	22 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	22 A
— up to 690 V at ambient temperature 60 °C rated value	20 A
• at AC-3	
— at 400 V rated value	16 A
— at 500 V rated value	12.4 A
— at 690 V rated value	8.9 A
• at AC-3e	
— at 400 V rated value	16 A
— at 500 V rated value	12.4 A
— at 690 V rated value	8.9 A
• at AC-4 at 400 V rated value	11.5 A
 at AC-5a up to 690 V rated value 	19.4 A
• at AC-5b up to 400 V rated value	13.2 A
• at AC-6a	
 — up to 230 V for current peak value n=20 rated value 	9.6 A
— up to 400 V for current peak value n=20 rated value	9.6 A
— up to 500 V for current peak value n=20 rated value	9.6 A
 — up to 690 V for current peak value n=20 rated value at AC-6a 	8.9 A
 up to 230 V for current peak value n=30 rated value 	6.6 A
 up to 400 V for current peak value n=30 rated value 	6.4 A
— up to 500 V for current peak value n=30 rated value	6.4 A
— up to 690 V for current peak value n=30 rated value	6.4 A
minimum cross-section in main circuit at maximum AC-1 rated value operational current for approx. 200000 operating	4 mm²
cycles at AC-4	
 at 400 V rated value 	5.5 A
• at 690 V rated value	4.4 A
operational current	
 at 1 current path at DC-1 	
— at 24 V rated value	20 A
— at 110 V rated value	2.1 A
— at 220 V rated value	0.8 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
 with 2 current paths in series at DC-1 	
– at 24 V rated value	20 A
— at 110 V rated value	12 A
— at 220 V rated value	1.6 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.7 A
• with 3 current paths in series at DC-1	

— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	20 A
— at 440 V rated value	1.3 A
— at 600 V rated value	1 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 110 V rated value	0.1 A
with 2 current paths in series at DC-3 at DC-5	0.177
- at 24 V rated value	20 A
— at 110 V rated value	
	0.35 A
• with 3 current paths in series at DC-3 at DC-5	
— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	1.5 A
— at 440 V rated value	0.2 A
— at 600 V rated value	0.2 A
operating power	
• at AC-3	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	7.5 kW
• at AC-3e	
— at 230 V rated value	4 kW
— at 400 V rated value	7.5 kW
— at 500 V rated value	7.5 kW
— at 690 V rated value	7.5 kW
operating power for approx. 200000 operating cycles	
at AC-4	
• at 400 V rated value	2.5 kW
• at 690 V rated value	3.5 kW
operating apparent power at AC-6a	
 up to 230 V for current peak value n=20 rated value 	3.8 kVA
• up to 400 V for current peak value n=20 rated value	6.6 kVA
• up to 500 V for current peak value n=20 rated value	8.3 kVA
• up to 690 V for current peak value n=20 rated value	10.6 kVA
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	2.5 kVA
• up to 400 V for current peak value n=30 rated value	4.4 kVA
• up to 500 V for current peak value n=30 rated value	5.5 kVA
• up to 690 V for current peak value n=30 rated value	7.6 kVA
short-time withstand current in cold operating state	
up to 40 °C	
 limited to 1 s switching at zero current maximum 	300 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 5 s switching at zero current maximum 	169 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 10 s switching at zero current maximum 	128 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 30 s switching at zero current maximum 	92 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 60 s switching at zero current maximum 	74 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	10 000 1/h
operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
• at AC-3 maximum	750 1/h
e at AC 4 maximum	250 1/b
at AC-4 maximum	250 1/h
at AC-4 maximum Control circuit/ Control type of voltage of the control supply voltage	250 1/h AC

• at 50 Hz rated value	110 V
• at 60 Hz rated value	110 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 50 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	0.05 1.1
• at 50 Hz	37 VA
• at 60 Hz	33 VA
inductive power factor with closing power of the coil • at 50 Hz	0.0
	0.8
• at 60 Hz	0.75
apparent holding power of magnet coil at AC • at 50 Hz	E 7 \/A
	5.7 VA
• at 60 Hz	4.4 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.25
• at 60 Hz	0.25
closing delay	
• at AC	9 35 ms
opening delay	
• at AC	7 13 ms
arcing time	10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts	1
instantaneous contact	
operational current at AC-12 maximum	10 A
operational current at AC-15	
 at 230 V rated value 	10 A
 at 400 V rated value 	3 A
 at 500 V rated value 	2 A
• at 690 V rated value	1 A
operational current at DC-12	
 at 24 V rated value 	10 A
 at 48 V rated value 	6 A
 at 60 V rated value 	6 A
 at 110 V rated value 	3 A
 at 125 V rated value 	2 A
 at 220 V rated value 	1 A
• at 600 V rated value	0.15 A
operational current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	2 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	14 A
• at 600 V rated value	11 A
yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	1 hp
— at 230 V rated value	2 hp
 for 3-phase AC motor 	
— at 200/208 V rated value	3 hp

at 220/230 V roted value	5 hp
— at 220/230 V rated value — at 460/480 V rated value	5 hp 10 hp
— at 575/600 V rated value	10 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
for short-circuit protection of the main circuit	
- with type of coordination 1 required	gG: 50A (690V,100kA), aM: 25A (690V,100kA), BS88: 50A (415V,80kA)
— with type of assignment 2 required	gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA)
 for short-circuit protection of the auxiliary switch 	gG: 10 A (500 V, 1 kA)
required	90. 10 A (300 V, 1 KA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
	according to DIN EN 60715
 side-by-side mounting 	Yes
height	70 mm
width	45 mm
depth	73 mm
required spacing	
 with side-by-side mounting 	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
 for grounded parts 	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	spring-loaded terminals
for auxiliary and control circuit	spring-loaded terminals
at contactor for auxiliary contacts	Spring-type terminals
of magnet coil	Spring-type terminals
type of connectable conductor cross-sections	
for main contacts	212(0.5 - 4.55)
— solid	2x (0.5 4 mm ²)
— solid or stranded	$2x (0.5 \dots 4 \text{ mm}^2)$
 finely stranded with core end processing 	2x (0.5 2.5 mm ²)
— finely stranded without core end processing	2x (0.5 2.5 mm ²)
at AWG cables for main contacts	2x (20 12)
connectable conductor cross-section for main contacts	
• solid	0.5 4 mm²
stranded	0.5 4 mm ²
 finely stranded with core end processing 	0.5 2.5 mm ²
 finely stranded without core end processing 	0.5 2.5 mm ²
connectable conductor cross-section for auxiliary	
contacts	
 solid or stranded 	0.5 4 mm²
	0.5 2.5 mm²
 finely stranded with core end processing 	0.5 2.5 mm
 finely stranded with core end processing finely stranded without core end processing 	0.5 2.5 mm ²

 for auxiliary cor 	ntacts				
 — solid or stranded — finely stranded with core end processing 		2x (0,5 4 mm²)			
— finely stra	nded with core end proc	essing	2x (0.5 2.5 mm²)		
	nded without core end p	rocessing	2x (0.5 2.5 mm ²)		
 at AWG cables 	for auxiliary contacts		2x (20 12)		
AWG number as co section	ded connectable cond	uctor cross			
 for main contact 	cts		20 12		
 for auxiliary contacts 		20 12			
Safety related data					
product function					
 mirror contact according to IEC 60947-4-1 		Yes			
B10 value with high demand rate according to SN 31920		1 000 000			
proportion of dangerous failures					
 with low deman 	nd rate according to SN	31920	40 %		
 with high dema 	ind rate according to SN	I 31920	73 %		
failure rate [FIT] with	low demand rate accord	ding to SN	100 FIT		
31920 T1 value for proof tes	t interval or service life	according to	20 y		
IEC 61508					
protection class IP (60529	on the front according	to IEC	IP20		
touch protection on	the front according to	IEC 60529	finger-safe, for vertical con	tact from the front	
suitability for use					
 safety-related s 	switching OFF		Yes		
Certificates/ approval	ls				
General Product Ap	oproval				
œ			(UL)		EHL
EMC	Functional Safety/Safety of Machinery	Declaration of	of Conformity	Test Certificates	EHL
EMC RCM	Safety/Safety of	Declaration of UK		Test Certificates Special Test Certific- ate	LTL
Ô	Safety/Safety of Machinery			Special Test Certific-	
RCM	Safety/Safety of Machinery			Special Test Certific-	
RCM	Safety/Safety of Machinery Type Examination Certificate		EG-Konf.	Special Test Certific-	
RCM Marine / Shipping	Safety/Safety of Machinery Type Examination Certificate		EG-Konf.	Special Test Certific-	

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2018-2AF02

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2018-2AF02

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2018-2AF02

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2018-2AF02&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2018-2AF02/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2018-2AF02&objecttype=14&gridview=view1







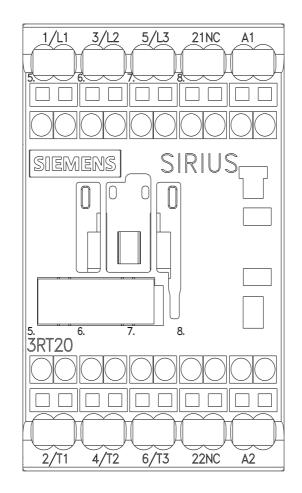

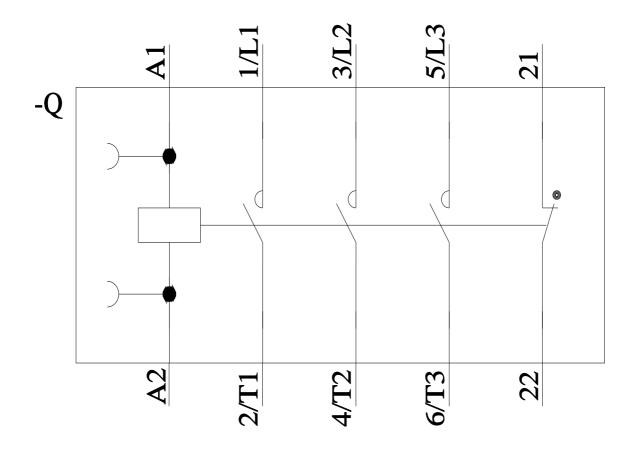

last modified:

6/2/2022 🖸