SIEMENS

# Data sheet for SINAMICS G115D

## Article No. : 6SL3521-1XB01-1AF0



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

### Rated data

**Input**

| | |
|---|---|
| Number of phases | 3 AC |
| Line voltage | 380 ... 480 V +10 % -10 % |
| Line frequency | 45 ... 66 Hz |
| Rated current | 2.69 A |

**Output**

| | |
|---|---|
| Number of phases | 3 AC |
| Rated voltage | 400 V |
| Rated power IEC 400V (HO) | 1.10 kW |
| Rated power NEC 480V (HO) | 1.50 hp |
| Rated current (HO) | 3.10 A |
| Max. output current | 6.20 A |
| Pulse frequency | 4 kHz |
| Output frequency for vector control | 0 ... 240 Hz |
| Output frequency for V/f control | 0 ... 550 Hz |

**Overload capability**

High Overload (HO)

200% × base load current IH for 3 s, followed by 150% for 57 s within a cycle time of 300s

### Inputs / outputs

**Standard digital inputs**

| | |
|---|---|
| Number [1)] | 4 |
| Switching level: 0 → 1 | 11 V |
| Switching level: 1 → 0 | 5 V |
| Max. inrush current | 15 mA |

**Fail-safe digital inputs**

| | |
|---|---|
| Number | 1 |

**Digital inputs / outputs parameterizable**

| | |
|---|---|
| Number | 2 |

**PTC/ KTY interface**

1 motor temperature sensor input, possible sensor PTC, KTY, PT1000, thermo click, accuracy ±5 °C

### General tech. specifications

| | |
|---|---|
| Power factor λ | 0.00 ... 0.87 |
| Offset factor cos φ | 0.99 |
| Efficiency η | 0.97 |
| Power loss | 0.054 kW |
| Filter class (integrated) | RFI suppression filter for Category C2 |
| Brake voltage | 400V AC |
| Integrated braking resistor (continuous braking power P_DB / peak power P_max) | 10W / 100W |

### Ambient conditions

| | |
|---|---|
| Cooling | Natural convection cooling |
| Installation altitude | 1,000 m (3,280.84 ft) |

**Ambient temperature**

| | |
|---|---|
| Operation | -30 ... 55 °C (-22 ... 131 °F) |
| Transport | -40 ... 70 °C (-40 ... 158 °F) |
| Storage | -40 ... 70 °C (-40 ... 158 °F) |

**Relative humidity**

| | |
|---|---|
| Max. operation | 95 % At 40 °C (104 °F), condensation and icing not permissible |

### Mechanical data

| | |
|---|---|
| Degree of protection | IP65/66 / UL type 4X |
| Frame size | FSA |
| Net weight | 5.95 kg (13.08 lb) |

**Dimensions**

| | |
|---|---|
| Width | 380 mm (14.96 in) |
| Height | 156 mm (6.14 in) |
| Depth | 129 mm (5.08 in) |

### Closed-loop control techniques

| | |
|---|---|
| V/f linear / square-law / parameterizable | Yes |
| V/f with flux current control (FCC) | Yes |
| V/f ECO linear / square-law | Yes |
| Sensorless vector control | Yes |
| Vector control, with sensor | No |
| Encoderless torque control | Yes |
| Torque control, with encoder | No |

### Communication

| | |
|---|---|
| Communication | PROFINET, EtherNet/IP |
| Version | M12 |

### Control option

| | |
|---|---|
| Control option | Repair switch |


SIEMENS

## Data sheet for SINAMICS G115D

**Article No. :** **6SL3521-1XB01-1AF0**

| Connections | |
|---|---|
| **Connection type** | |
| Version | Connector without daisy chain |
| **3AC 400V supply** | |
| Version | 1x Q4/2 |
| **24 V DC power supply** | |
| Variant | external |
| Version | 1x 7/8″ |
| **Digital I/O** | |
| Version | M12 |
| **Motor** | |
| Version | Q8/0 |
| **External brake resistor** | |
| Version | Cable gland (Standard) |
| **PE connection** | |
| Version | On housing with M5 screw |
| **Max. motor cable length** | |
| Shielded | 15 m (49.21 ft) |

| Converter losses to IEC61800-9-2* | |
|---|---|
| Efficiency class | IE2 |
| Comparison with the reference converter (90% / 100%) | 28.50 % |

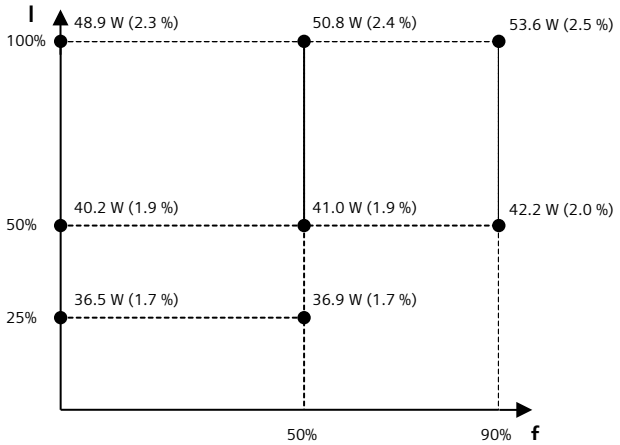


The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

| Standards | |
|---|---|
| Compliance with standards | UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH |
| CE marking | EMC Directive 2014/30/EC, Low-Voltage Directive 2014/35/EC |

[1] 4 inputs PNP, not isolated, additional 2x switcheable DI/DO