AC3218

AS-Interface control cabinet module

SmartL25 4 AO (C) C IP20

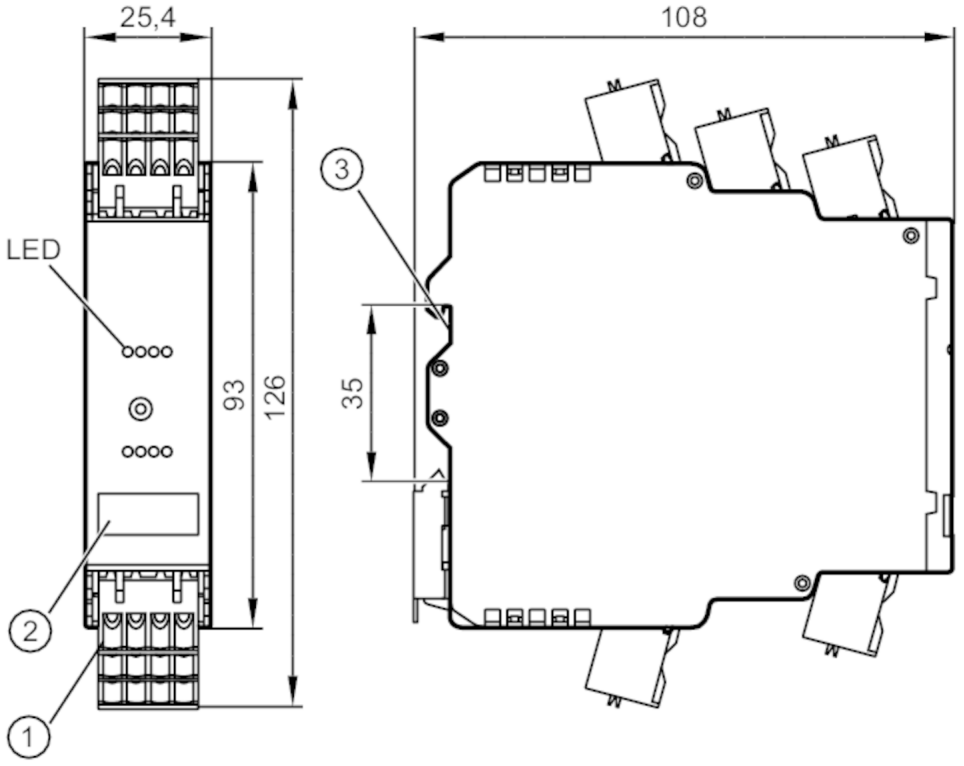

1 plug with cage clamp connection
2 panel for labelling
3 mounting on DIN rail

Application		
Application		Installation in control cabinets
Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Max. current consumption from AS-i	[mA]	157
Reverse polarity protection		yes
Additional voltage supply	[V]	20...30 DC; (AUX)
Additional voltage supply		optional
Max. current consumption from additional supply	[mA]	550; (AUX)
Inputs / outputs		
Number of inputs and outputs		Number of analogue outputs: 4
Outputs		
Number of analogue outputs		4; (connection of 2-wire or 4-wire actuators)
Analogue current output	[mA]	0...20
Max. load	[Ω]	600
Max. voltage drop across load for nominal current	[V]	10
Overload protection		yes

AC3218

AS-Interface control cabinet module

SmartL25 4 AO (C) C IP20

Resolution of analogue output		16 (1 bit = 1 µA)	
Actuator supply outputs		AS-i / AUX	
Operating conditions			
Ambient temperature	[°C]	0...70	
Storage temperature	[°C]	-25...75	
Max. relative air humidity	[%]	90; (non condensing)	
Max. height above sea level	[m]	2000	
Protection		IP 20	
Protection rating terminals		IP 20	
Pollution degree		2	
Tests / approvals			
EMC		EN 61000-6-2	
		EN 61000-6-4	
UL approval		power supply	Class 2
AS-i classification			
AS-i version		2.11; 3.0	
AS-i addressing		addressing socket	
Extended addressing mode		no	
AS-i master profile		M3; M4	
AS-i profile		S-7.3.6	
AS-i I/O configuration	[hex]	7	
AS-i ID code	[hex]	3.6	
Mechanical data			
Weight	[g]	202.1	
Housing		housing for DIN rail mounting	
Type of mounting		mounting on DIN rail	
Dimensions	[mm]	126 x 25.4 x 108	
Materials		PC-GF20	
Displays / operating elements			
Display		analogue signal	LED, yellow channels AO1...AO4
		diagnosis	LED, yellow
		operation	LED, green AS-i, AUX
		errors	LED, red
Accessories			
Items supplied		COMBICON connectors	
Remarks			
Pack quantity		1 pcs.	

AC3218

AS-Interface control cabinet module

SmartL25 4 AO (C) C IP20

Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

Connection

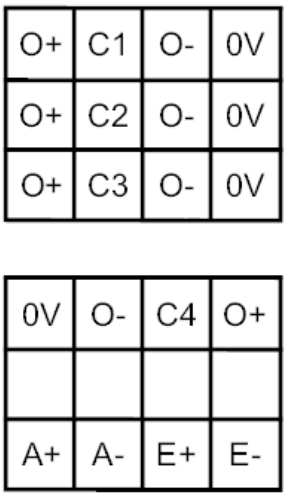

O+	actuator supply +24V
C1...4	analogue output Current
O-	actuator supply 0V
0V	analogue output 0V
A+	AS-i +
A-	AS-i -
E+	external actuator supply +24V
E-	external actuator supply 0V