


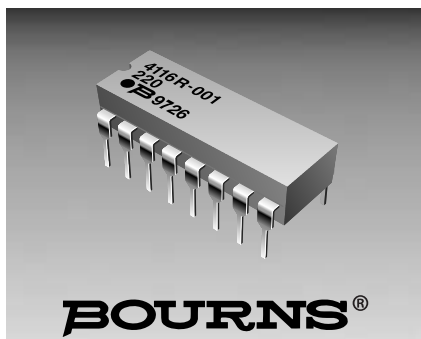

Features

- Compatible with automatic insertion equipment
- Superior package integrity
- Marking on contrasting background for permanent identification
- Now available with improved tolerance to $\pm 0.5\%$

For information on specific applications, download Bourns' application notes:

DRAM Applications
Dual Terminator Resistor Networks
R/2R Ladder Networks
SCSI Applications

4100R Series - Thick Film Molded DIPs

Product Characteristics

Resistance Range10 ohms to 10 megohms
Maximum Operating Voltage100 V
Temperature Coefficient of Resistance
50 Ω to 2.2 M Ω ± 100 ppm/ $^{\circ}$ C
below 50 Ω ± 250 ppm/ $^{\circ}$ C
above 2.2 M Ω ± 250 ppm/ $^{\circ}$ C
TCR Tracking50 ppm/ $^{\circ}$ C
maximum; equal values
Resistor ToleranceSee circuits
Operating Temperature-55 $^{\circ}$ C to +125 $^{\circ}$ C
Insulation Resistance10,000 megohms minimum
Dielectric Withstanding Voltage200 VRMS
Lead Solderability
.....Meet requirements of MIL-STD-202 Method 208

Environmental Characteristics

TESTS PER MIL-STD-202 ΔR MAX.
Short Time Overload $\pm 0.25\%$
Load Life $\pm 1.00\%$
Moisture Resistance $\pm 0.50\%$
Resistance to Soldering Heat
..... $\pm 0.25\%$
Terminal Strength $\pm 0.25\%$
Thermal Shock $\pm 0.25\%$

Physical Characteristics


FlammabilityConforms to UL94V-0
Lead Frame Material
.....Copper, solder coated
Body MaterialNovolac epoxy

How To Order

41 14 R - 1 - 152

Model _____
(41 = Molded DIP)
Number of Pins _____
Physical Configuration _____
(R = Thick Film Low Profile)
Electrical Configuration _____
• 1 = Isolated
• 2 = Bussed
• 3 = Dual Terminator
Resistance Code _____
• First 2 digits are significant
• Third digit represents the number of zeros to follow.
Resistance Tolerance _____
• Blank = $\pm 2\%$ (See "Resistance Tolerance" on next page for resistance range)
• F = $\pm 1\%$ (100 Ω - 1 M Ω)
• D = $\pm 0.5\%$ (100 Ω - 1 M Ω)
Consult factory for other available options.

Package Power Temp. Derating Curve

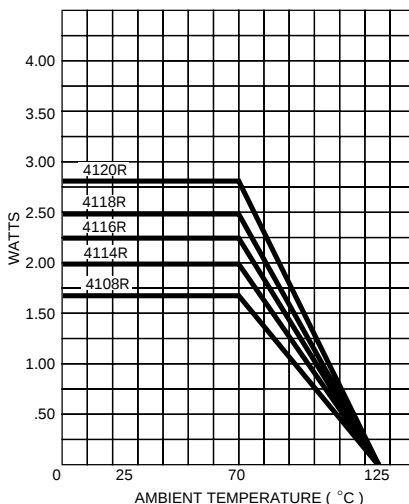


Package Power Rating at 70 $^{\circ}$ C


4108R1.69 watts
4114R2.00 watts
4116R2.25 watts
4118R2.50 watts
4120R2.80 watts

Typical Part Marking

Represents total content. Layout may vary.



Product Dimensions

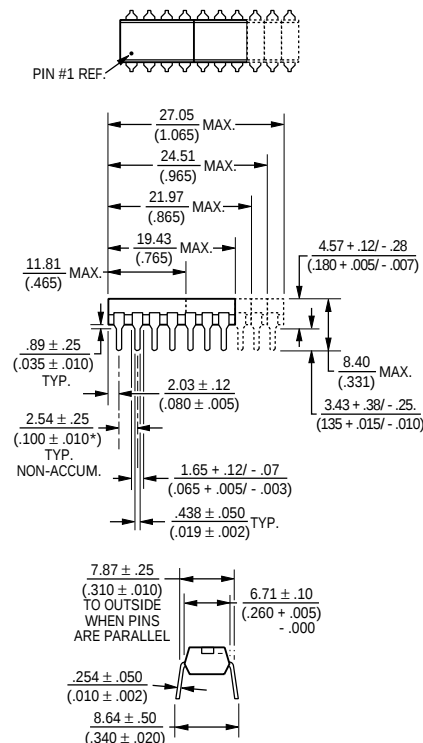

Governing dimensions are in metric. Dimensions in parentheses are inches and are approximate.


*Terminal centerline to centerline measurements made at point of emergence of the lead from the body.

4100R Series - Thick Film Molded DIPs

BOURNS®

Isolated Resistors (1 Circuit)

Model 4108R-1-RC
(4 Isolated Resistors)
Model 4114R-1-RC
(7 Isolated Resistors)
Model 4116R-1-RC
(8 Isolated Resistors)
Model 4118R-1-RC
(9 Isolated Resistors)
Model 4120R-1-RC
(10 Isolated Resistors)




Resistance Tolerance

10 ohms to 49 ohms±1 ohm
50 ohms to 5 megohms±2 %*
Above 5 megohms±5 %

Power Rating per Resistor


At 70 °C0.250 watt

Power Temperature Derating Curve



Bussed Resistors (2 Circuit)

Model 4108R-2-RC
(7 Resistors, Pin 8 Common)
Model 4114R-2-RC
(13 Resistors, Pin 14 Common)
Model 4116R-2-RC
(15 Resistors, Pin 16 Common)
Model 4118R-2-RC
(17 Resistors, Pin 18 Common)
Model 4120R-2-RC
(19 Resistors, Pin 20 Common)




Resistance Tolerance

10 ohms to 49 ohms±1 ohm
50 ohms to 5 megohms±2 %*
Above 5 megohms±5 %

Power Rating per Resistor


At 70 °C0.125 watt

Power Temperature Derating Curve



Dual Terminator (3 Circuit)

Model 4108R-3-R1/R2
Model 4114R-3-R1/R2
Model 4116R-3-R1/R2 (shown)
Model 4118R-3-R1/R2
Model 4120R-3-R1/R2

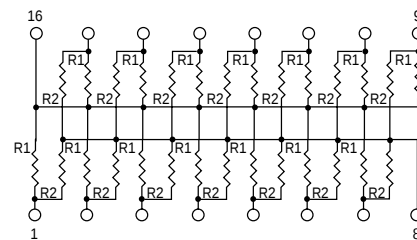


Resistance Tolerance

Below 100 ohms±2 ohms
100 ohms to 5 megohms±2 %*
Above 5 megohms±5 %

Power Rating per Resistor

At 70 °C0.125 watt

Power Temperature Derating Curve



Popular Resistance Values (1, 2 Circuits)**

Ohms	Code	Ohms	Code	Ohms	Code	Ohms	Code	Ohms	Code
10	100	180	181	1,800	182	15,000	153	120,000	124
22	220	220	221	2,000	202	18,000	183	150,000	154
27	270	270	271	2,200	222	20,000	203	180,000	184
33	330	330	331	2,700	272	22,000	223	220,000	224
39	390	390	391	3,300	332	27,000	273	270,000	274
47	470	470	471	3,900	392	33,000	333	330,000	334
56	560	560	561	4,700	472	39,000	393	390,000	394
68	680	680	681	5,600	562	47,000	473	470,000	474
82	820	820	821	6,800	682	56,000	563	560,000	564
100	101	1,000	102	8,200	822	68,000	683	680,000	684
120	121	1,200	122	10,000	103	82,000	823	820,000	824
150	151	1,500	152	12,000	123	100,000	104	1,000,000	105

* ADD "F" AFTER RESISTANCE CODE FOR ±1 % TOLERANCE AVAILABLE FROM 100 Ω THROUGH 1 MΩ, OR ADD "D" AFTER RESISTANCE CODE FOR ±0.5 % TOLERANCE AVAILABLE FROM 100 Ω THROUGH 1 MΩ.

PART NUMBER SUFFIX EXAMPLES: -103 = 10 KΩ, ±2 % -103F = 10 KΩ, ±1 % -103D = 10 KΩ, ±0.5 %

** NON-STANDARD VALUES AVAILABLE, WITHIN RESISTANCE RANGE.

Popular Resistance Values (3 Circuit)**

Resistance			
(Ohms)		Code	
R ₁	R ₂	R ₁	R ₂
160	240	161	241
180	390	181	391
220	270	221	271
220	330	221	331
330	390	331	391
330	470	331	471
3,000	6,200	302	622