

Technical data


32916XU

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage



VISUAL (S)

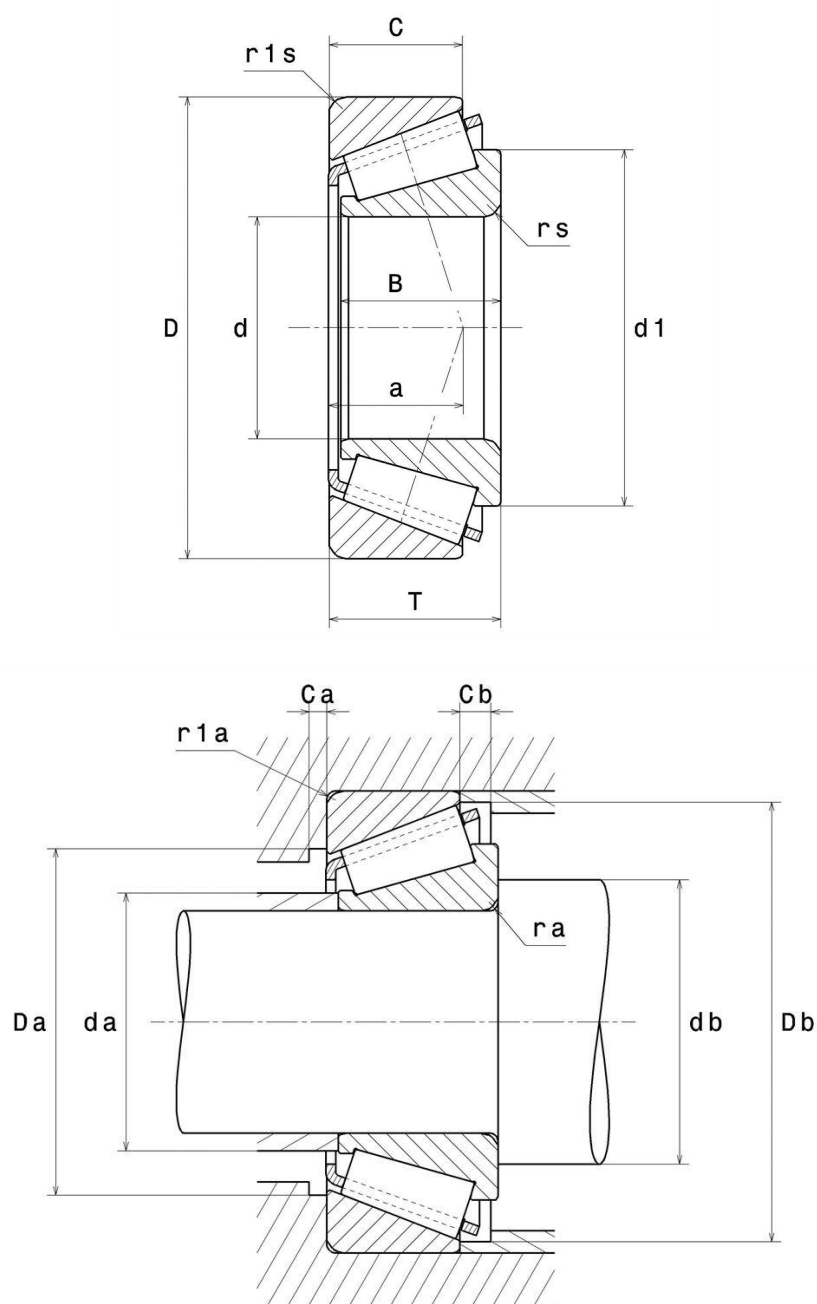

32916XU

Single row tapered roller bearings

PRODUCT DEFINITION	
Brand	NTN
d - Internal diameter	80 mm
D - External diameter	110 mm
B - Bearing/Inner ring width	20 mm
C - Outer ring width	16 mm
T - Total width	20 mm
d1 - External diameter inner ring	95 mm
a - Charge load application point	20 mm
rs - Min fillet radius	1 mm
r1s - Min fillet radius	1 mm
Mass	0,54 kg
ISO 355 reference	T2BC080

PRODUCT PERFORMANCE	
C - Dynamic load	79500000 mN
C0 - Static load	121000000 mN
Cu - Fatigue limit load	14800000 mN
A2 - Rating life coefficient	1
e - Coefficient	0.35
Y0 - Static axial load coefficient	0.94
Y2 - Upper axial load coefficient	1.71
N lim - Oil lubrication limit speed	24000 °/s
N lim - Grease lubrication limit speed	18000 °/s
Tmin - Min operating temperature	233,15 °K



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
 S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
 SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

32916XU

Single row tapered roller bearings

PRODUCT PERFORMANCE

Tmax - Max operating temperature	393,15 °K
---	-----------

ABUTMENT

da max - Max shoulder diameter IR	85 mm
db min - Min IR shoulder diameter	85,5 mm
Da min - Min shoulder diameter OR	99 mm
Da max - Max shoulder diameter OR	104,5 mm
Db min - Min OR shoulder diameter	106,5 mm
Ca - Min clearance	4 mm
Cb - Min clearance	4 mm
ra max - Max fillet radius	1 mm
r1a - Max fillet radius	1 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

$P = X.F_r + Y.F_a$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$P_0 = X_0.F_r + Y_0.F_a$

X_0	Y_0
0.5	Y0

If $P_0 \leq F_r$, then use $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table

