








Semiconductor relay, 1-phase 3RF2 Overall width 45 mm, 30 A 48-460 V / 24 V DC screw terminal

<b>product brand name</b>	SIRIUS
<b>product designation</b>	solid-state relay
<b>design of the product</b>	single-phase
<b>product type designation</b>	3RF20
<b>General technical data</b>	
<b>product function</b>	zero-point switching
power loss [W] for rated value of the current at AC in hot operating state	44.2 W
• per pole	44.2 W
<b>power loss [W] for rated value of the current without load current share typical</b>	0.4 W
insulation voltage rated value	600 V
type of voltage of the control supply voltage	DC
shock resistance acc. to IEC 60068-2-27	15g / 11 ms
vibration resistance acc. to IEC 60068-2-6	2g
<b>reference code acc. to IEC 81346-2</b>	Q
Substance Prohibrance (Date)	28.05.2009
<b>Main circuit</b>	
<b>number of poles for main current circuit</b>	1
<b>number of NO contacts for main contacts</b>	1
<b>number of NC contacts for main contacts</b>	0
operating voltage at AC	
• at 50 Hz rated value	48 ... 460 V
• at 60 Hz rated value	48 ... 460 V
<b>operating frequency rated value</b>	50 ... 60 Hz
<b>relative symmetrical tolerance of the operating frequency</b>	10 %
<b>operating range relative to the operating voltage at AC</b>	
• at 50 Hz	40 ... 506 V
• at 60 Hz	40 ... 506 V
<b>operational current</b>	
• at AC-51 rated value	30 A
• acc. to UL 508 rated value	30 A
<b>ampacity maximum</b>	30 A
<b>operational current minimum</b>	500 mA
<b>rate of voltage rise at the thyristor for main contacts maximum permissible</b>	500 V/μs
<b>blocking voltage at the thyristor for main contacts maximum permissible</b>	1 200 V
<b>reverse current of the thyristor</b>	10 mA

derating temperature	40 °C
surge current resistance rated value	300 A
I <sup>2</sup> t value maximum	450 A <sup>2</sup> ·s
<b>Control circuit/ Control</b>	
type of voltage of the control supply voltage	DC
control supply voltage 1 <ul style="list-style-type: none"> <li>at DC rated value</li> <li>at DC</li> </ul>	30 V 15 ... 24 V
control supply voltage <ul style="list-style-type: none"> <li>at DC initial value for signal &lt;1&gt; detection</li> <li>at DC full-scale value for signal&lt;0&gt; recognition</li> </ul>	15 V 5 V
control current at minimum control supply voltage <ul style="list-style-type: none"> <li>at DC</li> </ul>	13 mA
control current at DC rated value	15 mA
ON-delay time	1 ms; additionally max. one half-wave
OFF-delay time	1 ms; additionally max. one half-wave
<b>Auxiliary circuit</b>	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
<b>Installation/ mounting/ dimensions</b>	
fastening method <ul style="list-style-type: none"> <li>side-by-side mounting</li> </ul>	screw fixing Yes
tightening torque of fixing screw maximum	1.5 N·m
tightening torque [lbf·in] of fixing screw maximum	13 lbf·in
height	58 mm
width	45 mm
depth	48 mm
<b>Connections/ Terminals</b>	
type of electrical connection <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals screw-type terminals
type of connectable conductor cross-sections <ul style="list-style-type: none"> <li>for main contacts <ul style="list-style-type: none"> <li>solid</li> <li>finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for main contacts</li> </ul>	2x (1.5 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ) 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 2x (14 ... 10)
connectable conductor cross-section for main contacts <ul style="list-style-type: none"> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul>	1.5 ... 6 mm <sup>2</sup> 1 ... 10 mm <sup>2</sup>
type of connectable conductor cross-sections <ul style="list-style-type: none"> <li>for auxiliary and control contacts <ul style="list-style-type: none"> <li>solid</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> </ul> </li> <li>at AWG cables for auxiliary and control contacts</li> </ul>	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> ) 1x (AWG 20 ... 12)
AWG number as coded connectable conductor cross section for main contacts	14 ... 10
tightening torque <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	2 ... 2.5 N·m 0.5 ... 0.6 N·m
tightening torque [lbf·in] <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	7 ... 10.3 lbf·in 4.5 ... 5.3 lbf·in
design of the thread of the connection screw <ul style="list-style-type: none"> <li>for main contacts</li> <li>of the auxiliary and control contacts</li> </ul>	M4 M3

<b>stripped length of the cable</b> <ul style="list-style-type: none"><li>• for main contacts</li><li>• for auxiliary and control contacts</li></ul>		10 mm	7 mm			
<b>Safety related data</b>						
<b>protection class IP on the front acc. to IEC 60529</b>		IP20				
<b>touch protection on the front acc. to IEC 60529</b>		finger-safe, for vertical contact from the front				
<b>Ambient conditions</b>						
installation altitude at height above sea level maximum		1 000 m				
<b>ambient temperature</b> <ul style="list-style-type: none"><li>• during operation</li><li>• during storage</li></ul>		-25 ... +60 °C -55 ... +80 °C				
<b>Electromagnetic compatibility</b>						
<b>conducted interference</b> <ul style="list-style-type: none"><li>• due to burst acc. to IEC 61000-4-4</li><li>• due to conductor-earth surge acc. to IEC 61000-4-5</li><li>• due to conductor-conductor surge acc. to IEC 61000-4-5</li><li>• due to high-frequency radiation acc. to IEC 61000-4-6</li></ul>		2 kV / 5 kHz behavior criterion 2 2 kV behavior criterion 2 1 kV behavior criterion 2  140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1				
<b>field-based interference acc. to IEC 61000-4-3</b>		80 MHz ... 1 GHz 10 V/m, behavior criterion 1				
<b>electrostatic discharge acc. to IEC 61000-4-2</b>		4 kV contact discharging / 8 kV air discharging, behavior criterion 2				
<b>conducted HF interference emissions acc. to CISPR11</b>		Class A for industrial environment				
<b>field-bound HF interference emission acc. to CISPR11</b>		Class B for the domestic, business and commercial environments				
<b>Short-circuit protection, design of the fuse link</b>						
manufacturer's article number <ul style="list-style-type: none"><li>• of gS fuse for semiconductor protection at NH design usable</li><li>• of full range R fuse link for semiconductor protection at cylindrical design usable</li><li>• of back-up R fuse link for semiconductor protection at NH design usable</li><li>• of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable</li><li>• of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li><li>• of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li></ul>		<a href="#">3NE1815-0: These fuses have a smaller rated current than the semiconductor relays</a> <a href="#">5SE1325: These fuses have a smaller rated current than the semiconductor relays</a> <a href="#">3NE8003-1</a>  <a href="#">3NC1025: These fuses have a smaller rated current than the semiconductor relays</a> <a href="#">3NC1430</a>  <a href="#">3NC2232</a>				
manufacturer's article number of the gG fuse <ul style="list-style-type: none"><li>• at NH design usable</li><li>• at cylindrical design 14 x 51 mm usable</li></ul>		<a href="#">3NA6803: These fuses have a smaller rated current than the semiconductor relays</a> <a href="#">3NW6101-1: These fuses have a smaller rated current than the semiconductor relays</a>				
manufacturer's article number <ul style="list-style-type: none"><li>• of DIAZED fuse usable</li></ul>		<a href="#">5SB251: These fuses have a smaller rated current than the semiconductor relays</a>				
<b>Certificates/ approvals</b>						
<b>General Product Approval</b>		<b>EMC</b>	<b>Declaration of Conformity</b>	<b>Test Certificates</b>		
						<a href="#">Type Test Certificates/Test Report</a>
<b>other</b>						

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2030-1AA04>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2030-1AA04>



Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2030-1AA04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RF2030-1AA04&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2030-1AA04&lang=en)

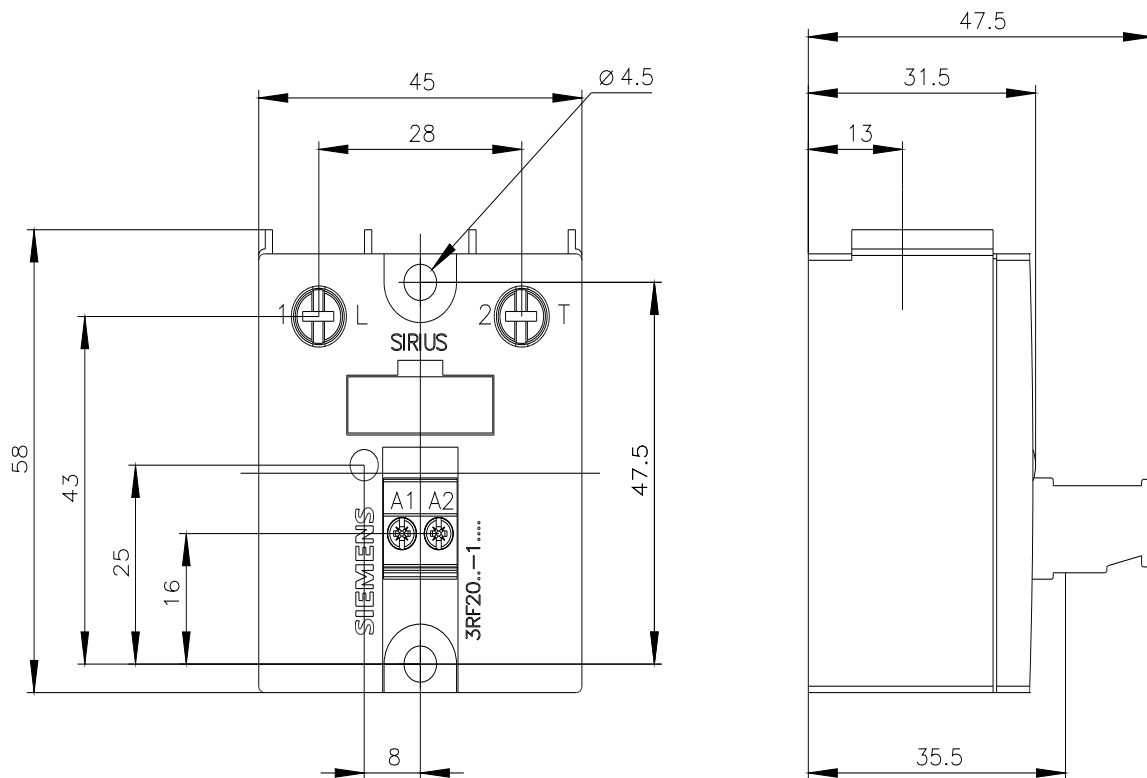

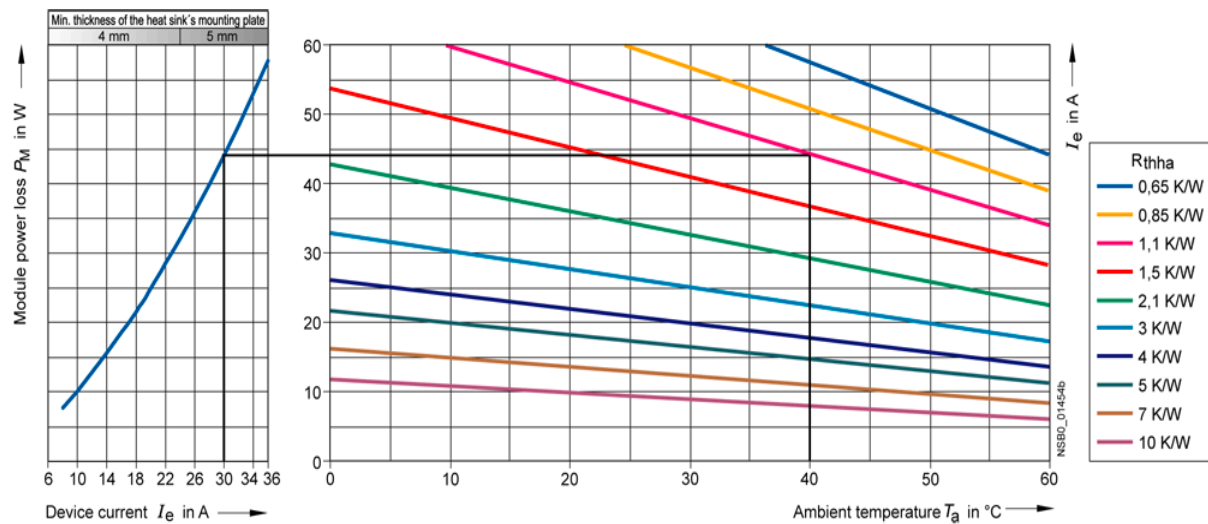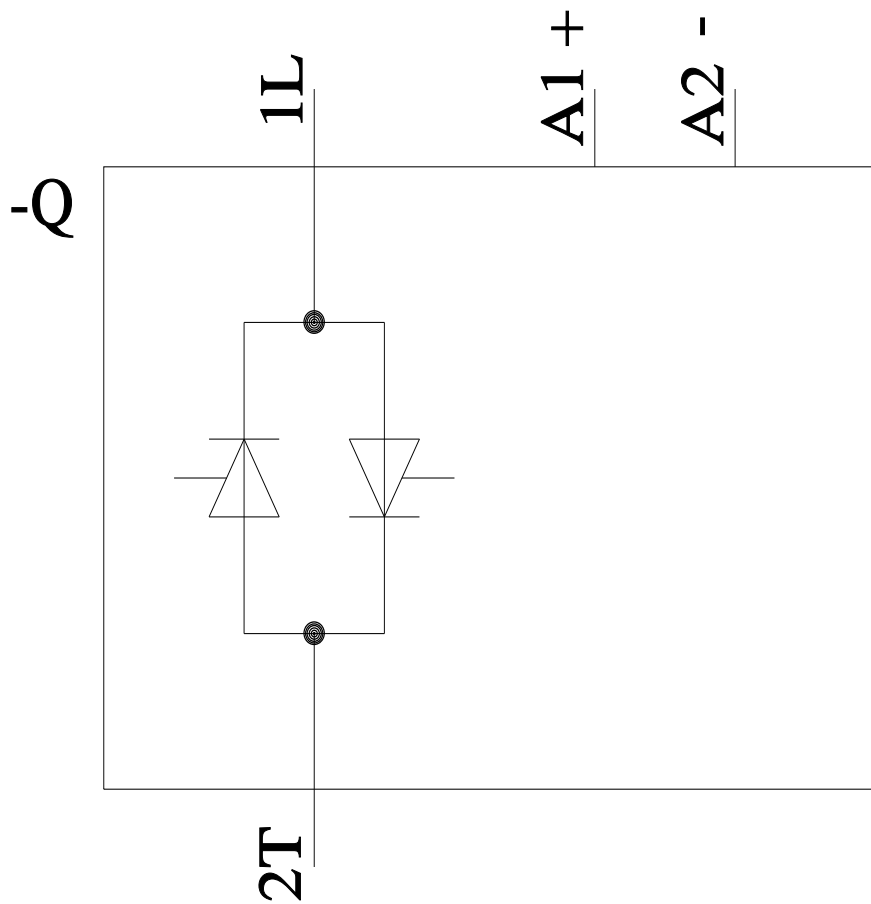

last modified:

1/11/2022