


# AC2435



## AS-Interface CompactLine module

CompactM12 4DI 4DO no IR

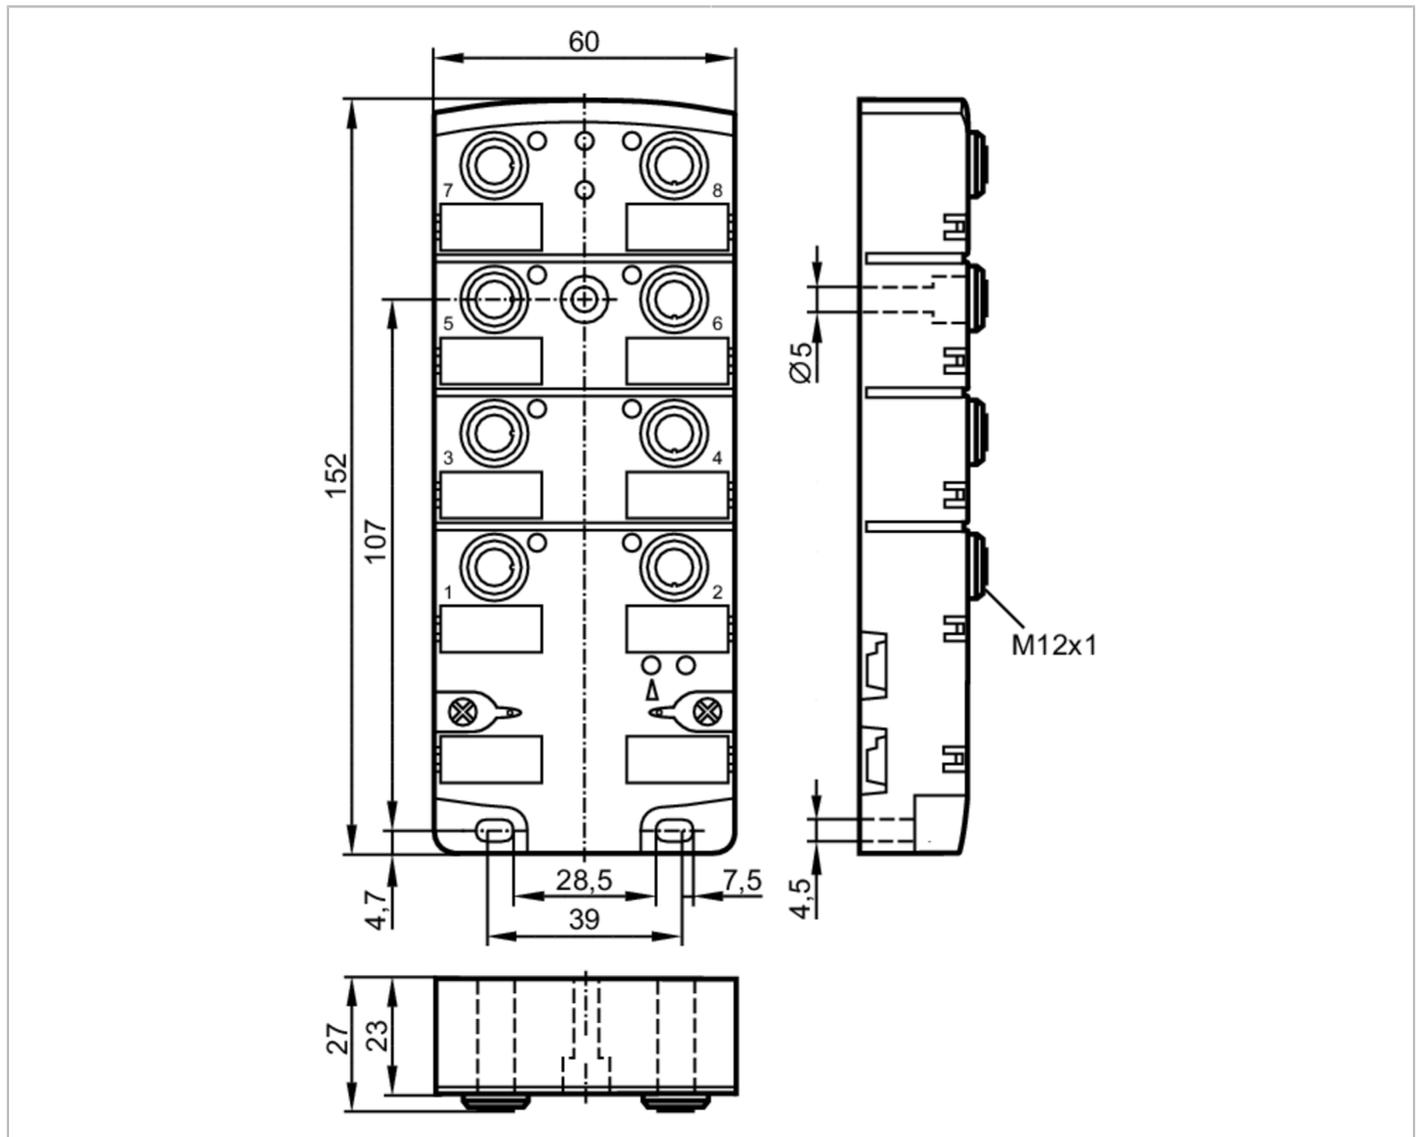

### Application

Application: field installation

### Electrical data

Operating voltage	[V]	26.5...31.6 DC
Max. current consumption from AS-i	[mA]	250
Max. current load total	[A]	4
Additional voltage supply	[V]	10...30 DC; (AUX)
Max. current consumption from additional supply	[mA]	4000; (AUX)
Integrated watchdog		yes

### Inputs / outputs

Number of inputs and outputs: Number of digital inputs: 4; Number of digital outputs: 4



## AS-Interface CompactLine module

CompactM12 4DI 4DO no IR

Inputs	
Number of digital inputs	4; (bidirectional)
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs	AS-i
Power supply [V]	20...30; (DC)
Max. total current rating of inputs [mA]	200
Input current limitation [mA]	15
Input current High [mA]	6...10
Input current Low [mA]	0...2
Switching level high [V]	> 11
Digital inputs protected against short circuits	yes
Outputs	
Number of digital outputs	4
Circuit	PNP
Voltage range DC [V]	10...30; (AUX)
Max. current load per output [mA]	2000; (utilisation category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))
Max. current load outputs total [A]	4
Short-circuit proof	yes
Electrically separated	yes
Actuator supply outputs	AUX
Operating conditions	
Ambient temperature [°C]	-25...80
Storage temperature [°C]	-25...80
Max. relative air humidity [%]	90; (non condensing)
Max. height above sea level [m]	2000
Protection	IP 67; (when flat cables are used E7400x / E7401x)
Tests / approvals	
EMC	EN 61000-6-2
	EN 61000-6-3
	EN 62026-2
	EN 50581
MTTF [years]	188
UL approval	power supply Class 2
AS-i classification	
AS-i version	2.11; 3.0
Extended addressing mode	no
AS-i master profile	M2; M3; M4
AS-i profile	S-7.0.E
AS-i I/O configuration [hex]	7
AS-i ID code [hex]	0.E

# AC2435



## AS-Interface CompactLine module

CompactM12 4DI 4DO no IR

Assignment of the data bits	data bit	D0	D1	D2	D3
	input	1	2	3	4
	socket	I-1	I-2	I-3	I-4
	pin	2+4	2+4	2+4	2+4
	Output	1	2	3	4
	socket	O-1	O-2	O-3	O-4
	pin	4	4	4	4

Mechanical data	
Weight [g]	381.5
Housing	rectangular
Type of mounting	AS-i flat cables directly connectable
Dimensions [mm]	152 x 60 x 27
Materials	PA; socket: brass nickel-plated; threaded inserts in the lower part: brass nickel-plated; O-ring: Viton; piercing contacts: CuSn6 nickel-plated and tin-plated

Displays / operating elements		
Display	switching status	LED, yellow I1...I4, O1...O4
	operation	LED, green AS-i, AUX
	errors	LED, red


Electrical connection	
Module connection	Flat cables

Accessories	
Items supplied	stainless steel sleeve for installation in case of high mechanical stress , E70402

Remarks	
Remarks	Do not connect any of the following points to an external potential: I-, I+, I1, I2, I3, I4
	The connections are electrically connected with the AS-i cable.
	For loads > 20 W (max. 2 A) an external protective circuit (e.g. a diode) is required.
Pack quantity	1 pcs.

### Electrical connection

Connector: M12; coding: A



Inputs	
1	Sensor supply L+
2+4	data input 1 internally bridged
3	Sensor supply L-
5	functional earth
Outputs	
3	external voltage AUX -
4	switching output
5	functional earth (FE)
1, 2	not used