




EAN CODE : 3760244880284

24V + PRIM 400V AL 912AES

- EASY** : DIN rail or wall mounting.
- QUICK** : Screw terminal blocks.
- PRACTICAL** : Power-on indicator.
- PROTECTED** : Triple protection.
- Optional protective cover.

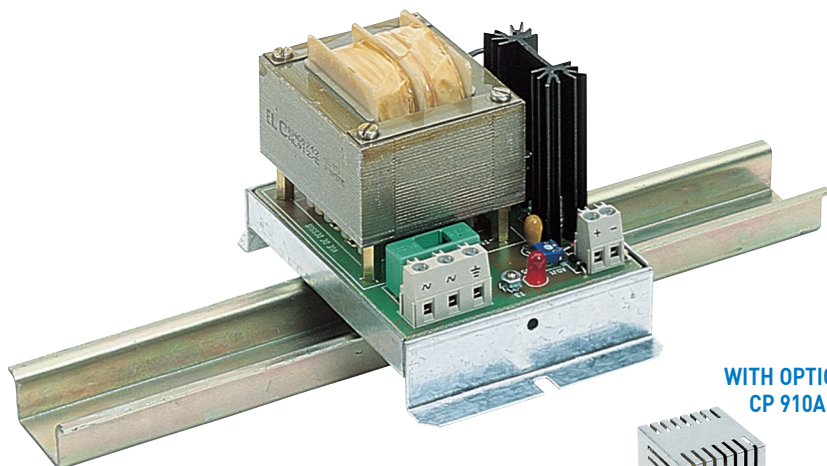

20 WATTS
 24V
 0,8A
 Prim. 400V



Specifications

Voltage

- Floating outputs on screw terminal block for 2,5 mm² rigid or 1,5 mm² flexible wire.
- Output voltage : 24 Volts (set).
- Accuracy : ± 0,5%.
- Regulation : < 40mV for a load variation from 0 to 100%.
 < 10mV for a 10% line variation.
- Ripple : < 3 mV peak to peak or 1 mV rms.
- Internal resistance : < 50 mΩ.
- Hold-up time : 20 ms at half load and 5 ms at full load.
- Indicator : power-on LED indicator.

Current

- Max I : 0,8A.
- Idc : 2A (allows current surges).

Protection

- Against short circuit, by current limit.
- Against overtemperature, by thermal shutdown.
- Against overcurrent on transformer primary, by fuse.

Other specifications

- Safety : Class I
 Complies with EN 61010-1, overvoltage category II, pollution degree 2.
 Built-in transformer as per EN 61558-2-6.
- EMC : Complies with EN 61000-6-2 and EN 61000-6-4.
- Input voltage : 400 Volts, ± 10%, 50 / 60Hz.
- Mains input : screw terminal block for 2,5 mm² rigid or 1,5 mm² flexible wire.
- Power consumption : 50 VA max.
- Dielectric strength : 5550 V from input to output,
 3250 V from input to chassis.
- Insulation resistance : 100 MΩ / 1000 V from output to chassis.
- Presentation : Galvanized base with lugs and clips for symmetrical DIN rail mounting.
- Optional : Protective cover, reference: CP 910A

Mounting

- 3 through slots (4,5 x 9) for M4 screws, or 2 symmetrical DIN rail mounting clips (fitted).

