Features

- Boost Converter
- Efficency 93% , >80% With 10% Load
- Input Range Down To 0.65V

• Continuous Short Circuit Protection

Switching Regulator

- 7µA Input Current In Standby
 -40°C To +100°C Operation
- EN62368-1 + AM2 (pending)

Description

The R-78S is a DC/DC boost converter designed to run from single cell batteries. The input voltage range of 0.65V-3.15V means that alkaline, NiCd, NiMH, zinc-carbon or lithium chemistry cells can be used to generate a stable 3.3V output to power microprocessors, WLAN/Bluetooth modules and IoT systems. The very high efficiency and low standby consumption can be used to extend battery lifetimes until the "last gasp" to get the maximum available energy out of the cell. The wide operating temperature of -40°C to +100°C, short circuit protection, OTP, Class A EMC and 3-year warranty round off this high performance converter.

| Selection (| Guide | | | | | |
|----------------|---------------------------------|----------------------------|--------------------------------|----------------------------|--|--|
| Part Number | Input Voltage Range [VDC] | Output Voltage [VDC] | Max. Output Current [mA] | Effici @ min Vin [%] | ency ⁽¹⁾ @ max. Vin [%] | Max. Capacitive Load ⁽²⁾ [µF] |
| R-78S3.3-0.1 | 0.65-3.15 | 3.3 | 100 | 92 | 93 | 100 |
| | | | | | | |

Notes:

Note1: Efficiency is tested by 1.5V input voltage and full load.

Note2: Max. Cap Load is tested by nominal input and full resisitive load.

| Parameter | Condition | Min. | Тур. | Max. |
|------------------------------|----------------------------|--|----------|---------|
| Minimum Start-up Voltage | | | 0.8VDC | |
| Input Voltage Range | 40mA (continuous) 100mA | 0.65VDC 1.5VDC | | 3.15VDC |
| No Load Power Consumption | | | 240µW | |
| Under Voltage Lockout | DC-DC OFF | | 0.4VDC | |
| Quiescent Current | | | 160µA | |
| Start-up time | | | 2ms | |
| Rise Time | | | 800µs | |
| Internal Operating Frequency | | | 1200kHz | |
| Minimum Load | | | 0% | |
| Dropout Voltage | | | 150mV | |
| Output Ripple and Noise | 20MHz BW | | 100mVp-p | |
| ON/OFF CTRL | DC-DC ON DC-DC OFF | Open or 0.7V ≤ V _{CTRL} <vin Short to GND or V_{CTRL}<0.1V</vin | | |
| Standby Current | | | 7μΑ | |

$\label{eq:specifications} \ensuremath{\text{specifications}} \ensuremath{\left(\text{measuremath{\mathbb{G}}} \ensuremath{\left(a_{ta} = 25^{\circ}\text{C}, \ensuremath{1.5\text{Vin}} \ensuremath{, \ensuremath{\text{subscript{specifications}}} \ensuremath{\left(a_{ta} \ensuremath{\text{charm{spheremath{\text{subscript{spheremath{\text{subscript{spheremath{\text{subscript{spheremath{\text{subscript{spherem{subscript{subscr$

RECOM DC/DC Converter

R-78S






EN62368-1 (pending)

EN55022 compliant

RECOM DC/DC Converter

Specifications (measured @ ta= 25°C, 1.5Vin , full load after warm up unless otherwise stated)

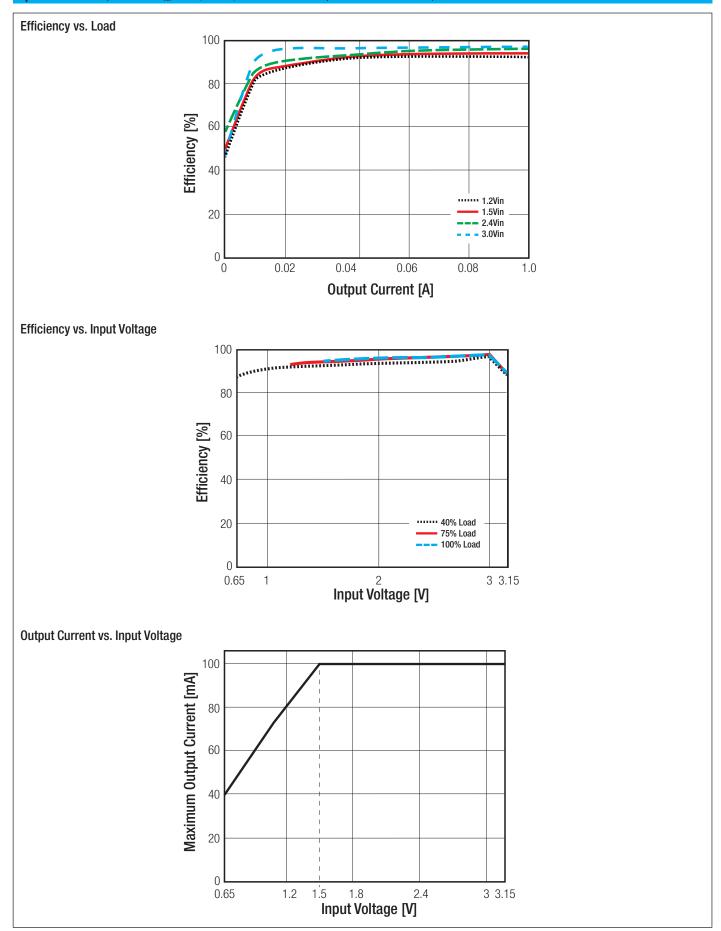

R-78S

Series

RECOM DC/DC Converter


R-78S Series

Specifications (measured @ ta= 25°C, 1.5Vin , full load after warm up unless otherwise stated)

| REGULATIONS | | |
|-----------------|----------------------------------|------------|
| Parameter | Condition | Value |
| Output Accuracy | | ±3.0% typ. |
| Line Regulation | low line to high line, full load | ±0.3% typ. |
| Load Regulation | 10% to 100% load | ±1.0% typ. |

| PROTECTIONS | | | |
|-----------------------------------|---------------------|--------------------|--|
| Parameter | Con | dition | Value |
| Short Circuit Protection (SCP) | below 100m Ω | | continuous, auto recovery |
| Over Temperature Protection (OTP) | internal IC | ≥ 150°C ≤ 130°C | shutdown restart after cooling down |

| ENVIRONMENTAL | | |
|---|---|--|
| Parameter | Condition | Value |
| Operating Temperature Range | with derating (see graph) | -40°C to +100°C |
| Maximum Case Temperature | | +105°C |
| Temperature Coefficient | | 0.015%/°C |
| Operating Altitude | | 2000m |
| Operating Humidity | non-condensing | 5% to 95% RH |
| Pollution Degree | | PD2 |
| MTBF | according to MIL-HDBK-217F, G.B. +25°C +90°C | 78172 x 10 ³ hours 6963 x 10 ³ hours |
| Vibration | | 10-55Hz, 2G, 30min along X, Y and Z axis |
| Derating Graph (@ Chamber and natural convection 0.1m/s) | | |

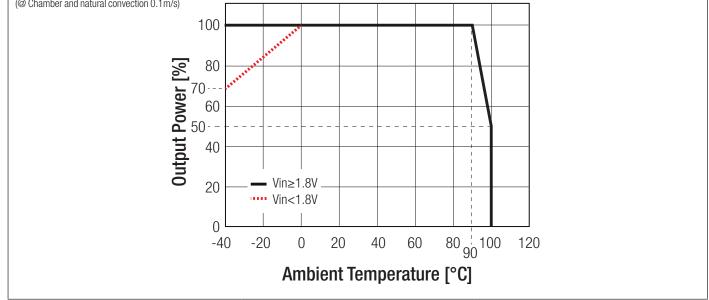

| SAFETY AND CERTIFICATIONS | | |
|---|----------------------|------------------------------|
| Certificate Type (Safety) | Report / File Number | Standard |
| Audio/video, information and communication technology equipment Safety requirements | (pending) | EN62368-1, 2nd Edition, 2014 |
| RoHs2+ | | RoHS 2011/65/EU + AM2015/863 |
| | · · · · | |


RECO **DC/DC** Converter

R-78S Series

Specifications (measured @ ta= 25°C, 1.5Vin , full load after warm up unless otherwise stated)

| th external components th external components ±8kV and Contact ± 4kV | EN55024, 2010 |
|--|---|
| | EN55022, Class B EN55024, 2010 IEC61000-4-2, Criteria A |
| ± 8 kV and Contact ± 4 kV | |
| \pm 8kV and Contact \pm 4kV | IEC61000-4-2, Criteria A |
| | |
| 3 V/m | IEC61000-4-3, Criteria A |
| ±0.5kV | IEC61000-4-4, Criteria A |
| ±0.5kV | IEC61000-4-5, Criteria A |
| 3V | IEC61000-4-6, Criteria A |
| 50Hz/ 1A/m | IEC61000-4-8, Criteria A |
| | ±0.5kV ±0.5kV 3V |

EMC Filtering Suggestions according to EN55022 Class B

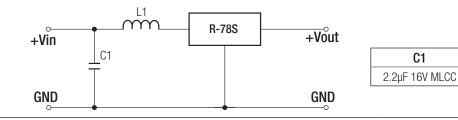


| | DIMENSION and PHYSICAL CHARACTERISTICS | | | |
|---------------------------|--|--|--|--|
| Parameter | Туре | Value | | |
| | Case | non-conductive black plastic, (UL94 V-0) | | |
| Material | Potting | epoxy, (UL94 V-0) | | |
| | PCB | FR4, (UL94 V-0) | | |
| Package Dimension (LxWxH) | | 11.6 x 8.5 x 10.4mm | | |
| Package Weight | | 2g typ. | | |

C1


L1

1µH Choke

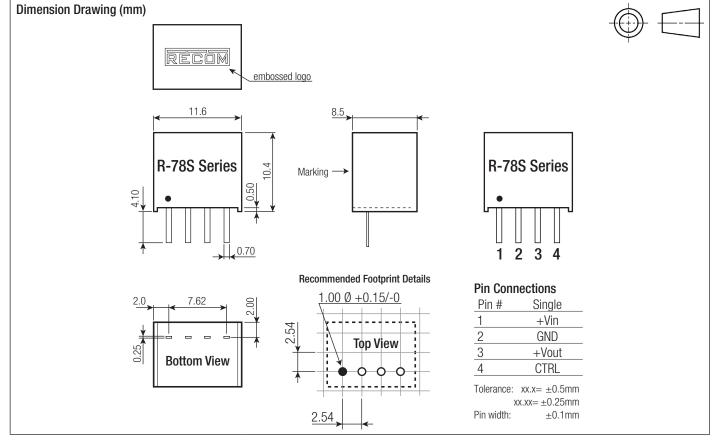

RECOM DC/DC Converter

Specifications (measured @ ta= 25°C, 1.5Vin , full load after warm up unless otherwise stated)

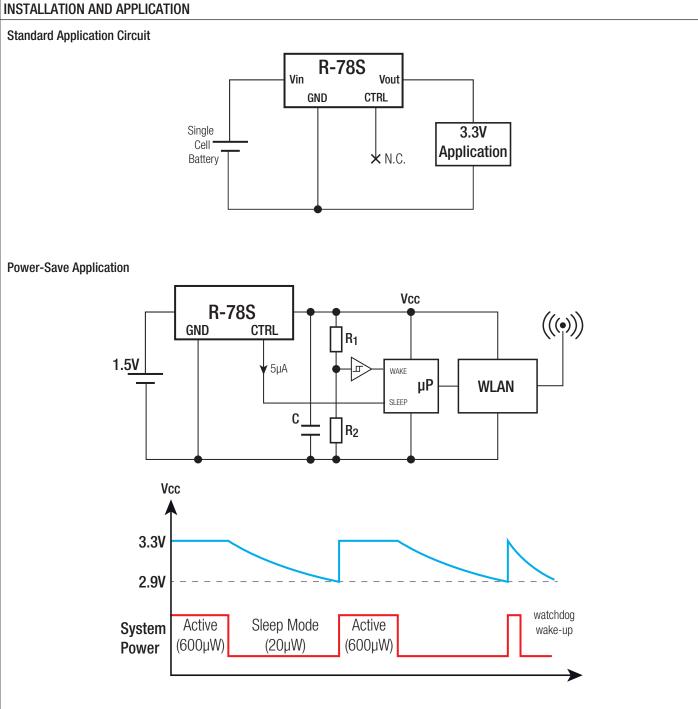

| PACKAGING INFORMATION | | | |
|-----------------------------|----------------|-----------------------|--|
| Parameter | Туре | Value | |
| Packaging Dimension (LxWxH) | tube | 520.0 x 11.2 x 18.2mm | |
| Packaging Quantity | | 42pcs | |
| Storage Temperature Range | | -55°C to +125°C | |
| Storage Humidity | non-condensing | 5% to 95% RH | |

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

R-78S

Series