


Product description	M8 Female panel mount connector, Contacts: 3, unshielded, single wires, IP67/IP69K, M8x0.5, potted
Area	M8
Series	718
Part no.	09 3412 00 03


Illustration



Scale drawing



Contact arrangement (Plug-in side)



You can find the assembly instructions on the next page.

Technical data

General features

Part no.	09 3412 00 03
Connector design	Female panel mount connector
Type standard	DIN EN 61076-2-104
Wire length	0.2 m (Standard 0.2m. Other lengths are available on request).
Version	Connector socket straight
Connector locking system	snap-in, screw
Termination	single wires
Degree of protection	IP67/IP69K
Connection cross-section	0.25 mm ² / AWG 24
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	6.32
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	50 V (AC) / 60 V (DC)
Rated impulse voltage	1500 V
Rated current	4.0 A
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

Product description **M8 Female panel mount connector, Contacts: 3, unshielded, single wires, IP67/IP69K, M8x0.5, potted**

Area **M8**
Series **718**
Part no. **09 3412 00 03**


Material

Contact body material	PA black
Contact material	CuSn (bronze)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	5c2096e0-4b54-4188-8b80-8fc6a1d4af4c

Classifications

eCl@ss 11.1	27-44-01-03
ETIM 9.0	EC003569

Assembly instructions / Panel cut-out

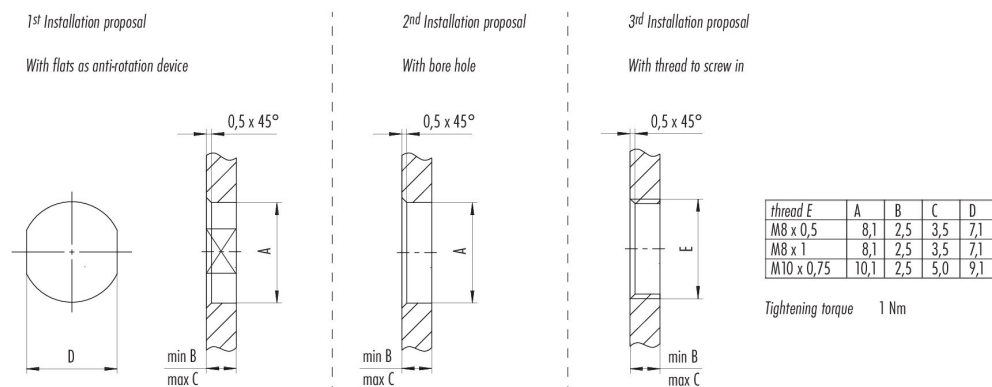

Product description	M8 Female panel mount connector, Contacts: 3, unshielded, single wires, IP67/IP69K, M8x0.5, potted
Area	M8
Series	718
Part no.	09 3412 00 03

General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 50 cNm).