





Technical data

6012ZZNR/2AS

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, snap ring & groove on outer diameter, shields on both sides

VISUAL (S)

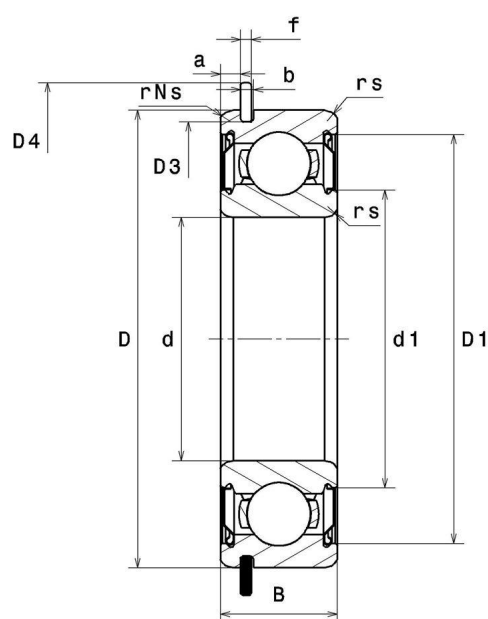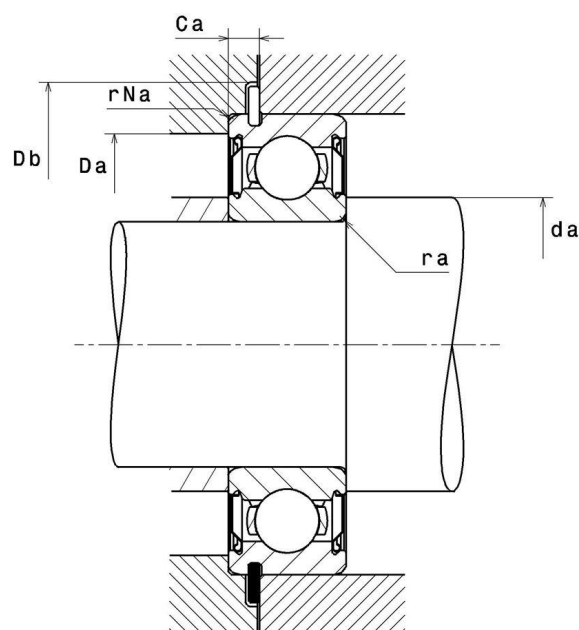

6012ZZNR/2AS

Single row deep groove ball bearings

PRODUCT DEFINITION

Brand	NTN
d - Internal diameter	60 mm
D - External diameter	95 mm
B - Bearing/Inner ring width	18 mm
a min - Min position Groove	2,67 mm
a max - Max position groove	2,87 mm
rs - Min fillet radius	1,1 mm
rNs - Min fillet radius	0,5 mm
D3 - Max bottom groove diameter	91,82 mm
b min - Min groove width	2,7 mm
b max - Max groove width	3 mm
r0 max - Max bottom groove radius	0,6 mm
D4 max - Max outer diameter of assembled stop ring	101,6 mm
f - Stop ring thickness	2,46 mm
Snap ring reference	R95
Radial clearance class	CN
Mass	0,414 kg

PRODUCT PERFORMANCE

C - Dynamic load	32500000 mN
C0 - Static load	23200000 mN
Cu - Fatigue limit load	1730000 mN
f0 - Coefficient	15.6
N lim - Grease lubrication limit speed	42000 °/s



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

6012ZZNR/2AS

Single row deep groove ball bearings

PRODUCT PERFORMANCE

Tmin - Min operating temperature	248,15 °K
Tmax - Max operating temperature	393,15 °K

ABUTMENT

da min - Min shoulder diameter IR	66,5 mm
Da max - Max shoulder diameter OR	88,5 mm
ra max - Max shaft & housing fillet radius	1 mm
rNa max - Max fillet radius on segment side	0,5 mm
Ca min - Mini segment position	5,13 mm
Ca max - Max segment position	5,33 mm
Db min - Min stop ring position diameter	103 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

$$P = X.Fr + Y.Fa$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$Po = X_0.Fr + Y_0.Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $Po \leq Fr$, then use $Po = Fr$