

1341930

https://www.phoenixcontact.com/in/products/1341930

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Device connector front mounting, series: M23 PRO Signal, angled rotatable, shielded: yes, for standard and ONECLICK fast locking system, No. of pos.: 8+1, Direction of rotation: Standard, contact connection type: Pin, Crimp connection, flange dimensions: 26 mm x 26 mm, coding: N, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

#### Your advantages

- · Solutions with cross-manufacturer compatibility for standard and fast locking systems
- · Modern, consistent design for highly convenient operation
- · Crimping connection: vibration- and temperature-resistant assembly
- · All housing can be fitted with pin or socket contacts
- · Safe use in the field, thanks to high degree of protection

#### Commercial data

Item number	1341930
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	****
Product key	ABRABM
GTIN	4063151652005
Weight per piece (including packing)	117.4 g
Weight per piece (excluding packing)	117.4 g
Customs tariff number	85366990
Country of origin	DE



1341930

https://www.phoenixcontact.com/in/products/1341930

### Technical data

#### Notes

Order information:	Order crimp contacts 8 x Ø 1 mm, 1 x Ø 2 mm separately
Notes on operation	Please observe the derating curve.
Safety note	
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	<ul> <li>WARNING: Commission properly functioning products only.</li> <li>The products must be regularly inspected for damage.</li> <li>Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li> </ul>
	WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	<ul> <li>The products are suitable for applications in plant, controller, and electrical device engineering.</li> </ul>
	<ul> <li>When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li> </ul>
	<ul> <li>Assembled products may not be manipulated or improperly opened.</li> </ul>
	<ul> <li>Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).</li> </ul>
	<ul> <li>When using the product in direct connection with third-party manufacturers, the user is responsible.</li> </ul>
	<ul> <li>For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li> </ul>
	<ul> <li>Ensure that the protective or functional ground has been properly connected.</li> </ul>
	<ul> <li>VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li> </ul>
	Only use tools recommended by Phoenix Contact
	<ul> <li>The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.</li> </ul>
	<ul> <li>Operate the connector only when it is fully plugged in and interlocked.</li> </ul>
	<ul> <li>Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li> </ul>
	<ul> <li>Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li> </ul>
	The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to



1341930

https://www.phoenixcontact.com/in/products/1341930

	warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
oduct properties	
Product type	Circular connectors (device side)
aterial specifications	
Flammability rating according to UL 94	V0
onnector	
Insulating body	
Note	Order information: Order crimp contacts 8 x Ø 1 mm, 1 x Ø 2 mm separately
Coding	N
Insulation body material	PA 6.6
Insertion/withdrawal cycles	100
Connection method	Crimp connection
Contact switching type	Pin
Application	Signal
Number of positions	9
Direction of rotation	Standard
Connection profile	8+1
Contact diameter Power contacts	2 mm
Litz wire cross-section Power contacts min.	0.5 mm²
Litz wire cross-section Power contacts max.	2.5 mm²
Rated current Power contacts	20 A
Note	for max. connection cross section
Rated voltage	300 V
Rated surge voltage	2.5 kV
Overvoltage category	II
Degree of pollution	3
Contact diameter Signal contacts	1 mm
Litz wire cross-section Signal contacts min.	0.08 mm²
Litz wire cross-section Signal contacts max.	1 mm²
Nominal current per signal contact	8 A
Note	for max. connection cross section
Rated voltage Signal contact	300 V
Rated surge voltage	2.5 kV
Overvoltage category	II
Degree of pollution	3
Installation height	2000 m



1341930

https://www.phoenixcontact.com/in/products/1341930

#### Housing

Housing material	GD-Zn
Flange dimensions	26 mm x 26 mm
Type of locking	for standard and ONECLICK fast locking system
Pg screw connection	none
Degree of protection (plugged in)	IP66 / IP68 (2 m / 24 h)
Thread type	M23

#### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP68
Ambient temperature (operation)	-40 °C 105 °C (see to derating)
Permanent temperature	125 °C (DIN EN 60512-9-2 / 1000 h)





1341930

https://www.phoenixcontact.com/in/products/1341930

#### **Drawings**

Dimensional drawing

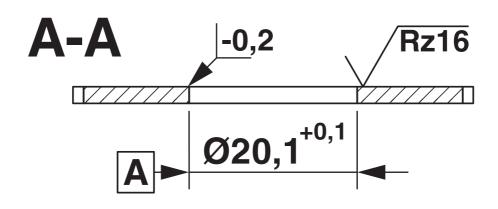

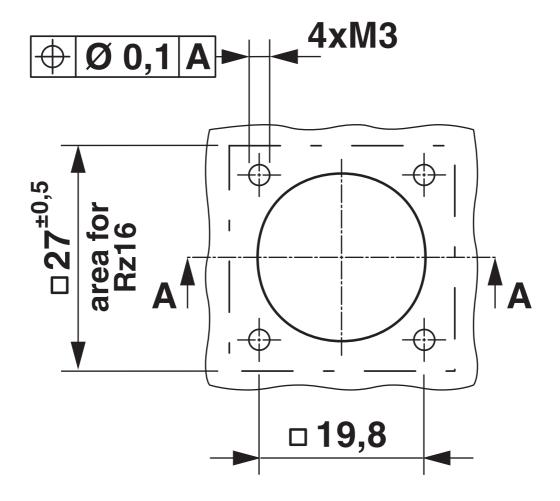


Installation dimensions



1341930

https://www.phoenixcontact.com/in/products/1341930

Schematic diagram

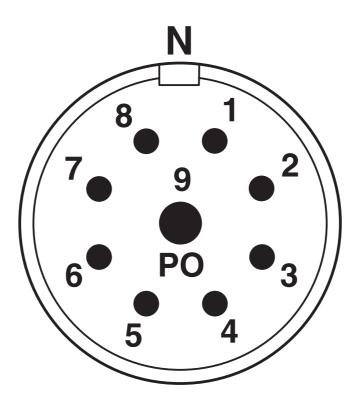


Connector pin assignment



1341930

https://www.phoenixcontact.com/in/products/1341930

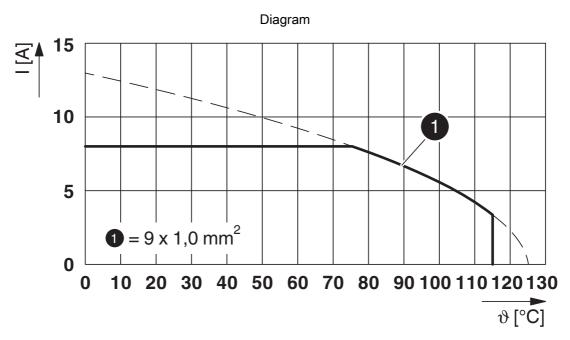

I = current strength,  $\vartheta$  = ambient temperature, 9x 8 A



1341930

https://www.phoenixcontact.com/in/products/1341930

#### **Approvals**

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/in/products/1341930



cUL Recognized

Approval ID: E335019-20141210



**UL Recognized**Approval ID: E335019-20141210

cULus Recognized



1341930

https://www.phoenixcontact.com/in/products/1341930

### Classifications

UNSPSC 21.0

#### **ECLASS**

202.00			
	ECLASS-11.0	27440109	
	ECLASS-12.0	27440109	
	ECLASS-13.0	27440109	
ETIM			
	ETIM 9.0	EC003569	
UNSPSC			

39121400



1341930

https://www.phoenixcontact.com/in/products/1341930

### Environmental product compliance

EU RoHS			
Fulfills EU RoHS substance requirements	Yes, No exemptions		
China RoHS			
Environment friendly use period (EFUP)	EFUP-E		
	No hazardous substances above the limits		
EU REACH SVHC			
REACH candidate substance (CAS No.)	No substance above 0.1 wt%		



1341930

https://www.phoenixcontact.com/in/products/1341930

#### Accessories

M23-Z0001 - Screw

1035117

https://www.phoenixcontact.com/in/products/1035117



Anchor screw, self-tapping, for M23-PRO series angled device connectors

#### RC-Z2220 - Contact insertion and removal tool

1604360

https://www.phoenixcontact.com/in/products/1604360



Positioning and removal tool for RC crimp contacts, pin/socket diameter: 2 mm



1341930

https://www.phoenixcontact.com/in/products/1341930

#### RC-Z2490 - Contact insertion and removal tool

1611803

https://www.phoenixcontact.com/in/products/1611803



Positioning and unlocking tool for RC crimp contacts (D-SUB) for pin/socket, diameter: 2 mm

#### RC-Z2097 - Contact insertion and removal tool

1604251

https://www.phoenixcontact.com/in/products/1604251



Insertion and removal tool for RC crimp contacts for pin/socket, diameter: 1 mm, connection cross-section: 0.08  $\rm mm^2 \dots 0.56~mm^2$ 



1341930

https://www.phoenixcontact.com/in/products/1341930

#### RC-Z2494 - Contact insertion and removal tool

1614123

https://www.phoenixcontact.com/in/products/1614123



Positioning and removal tool for RC crimp contacts, pin/socket diameter: 1 mm

#### RC-5SP2000 - Crimp contact

1603529

https://www.phoenixcontact.com/in/products/1603529



Crimp contact, Pin, turned, contact diameter: 2 mm, crimp range:  $0.5~\text{mm}^2$  ...  $0.75~\text{mm}^2$ , Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1~%) item no.: 1241632



1341930

https://www.phoenixcontact.com/in/products/1341930

#### RC-59P2000 - Crimp contact

1603498

https://www.phoenixcontact.com/in/products/1603498



Crimp contact, Pin, turned, Single contact, contact diameter: 2 mm, crimp range:  $0.75~\text{mm}^2$  ...  $1~\text{mm}^2$ , Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1~%) item no.: 1241632

#### RC-5CP2000 - Crimp contact

1603513

https://www.phoenixcontact.com/in/products/1603513



Crimp contact, Pin, turned, contact diameter: 2 mm, crimp range: 1 mm $^2$  ... 1.5 mm $^2$ , Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241634



1341930

https://www.phoenixcontact.com/in/products/1341930

#### RC-5AP2000 - Crimp contact

1603505

https://www.phoenixcontact.com/in/products/1603505



Crimp contact, Pin, turned, contact diameter: 2 mm, crimp range:  $1.5 \text{ mm}^2 \dots 2.5 \text{ mm}^2$ , Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241634

#### RC-11P2000 - Crimp contact

1596770

https://www.phoenixcontact.com/in/products/1596770



Crimp contact, Pin, turned, Single contact, contact diameter: 1 mm, crimp range:  $0.08~\text{mm}^2$ ...  $0.22~\text{mm}^2$ , Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1~%) item no.: 1240882



1341930

https://www.phoenixcontact.com/in/products/1341930

#### RC-12P2000 - Crimp contact

1597862

https://www.phoenixcontact.com/in/products/1597862



Crimp contact, Pin, turned, Single contact, contact diameter: 1 mm, crimp range:  $0.14~\text{mm}^2$ ...  $0.56~\text{mm}^2$ , Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1~%) item no.: 1240882

#### RC-1KP2000 - Crimp contact

1602996

https://www.phoenixcontact.com/in/products/1602996



Crimp contact, Pin, turned, Single contact, contact diameter: 1 mm, crimp range:  $0.5~\text{mm}^2$  ... 1 mm², Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241571



1341930

https://www.phoenixcontact.com/in/products/1341930

#### RC-22P2000 - Crimp contact

1603321

https://www.phoenixcontact.com/in/products/1603321



Crimp contact, Pin, rolled, Single contact, contact diameter: 1 mm, crimp range:  $0.22~\text{mm}^2$  ...  $0.56~\text{mm}^2$ , Single contact, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

#### RC-22P2300 - Crimp contact

1603324

https://www.phoenixcontact.com/in/products/1603324



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 500, contact diameter: 1 mm, crimp range:  $0.22~\text{mm}^2$  ...  $0.56~\text{mm}^2$ , Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1~%)



1341930

https://www.phoenixcontact.com/in/products/1341930

#### RC-22P2400 - Crimp contact

1603325

https://www.phoenixcontact.com/in/products/1603325



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 10000, contact diameter: 1 mm, crimp range:  $0.22~\text{mm}^2$ ...  $0.56~\text{mm}^2$ , Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1~%)

#### RC-21P2000 - Crimp contact

1603310

https://www.phoenixcontact.com/in/products/1603310



Crimp contact, Pin, rolled, Single contact, contact diameter: 1 mm, crimp range:  $0.08~\text{mm}^2~\dots~0.22~\text{mm}^2$ , Single contact



1341930

https://www.phoenixcontact.com/in/products/1341930

#### RC-21P2300 - Crimp contact

1603313

https://www.phoenixcontact.com/in/products/1603313



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 500, contact diameter: 1 mm, crimp range:  $0.08~\text{mm}^2$  ...  $0.22~\text{mm}^2$ 

#### RC-21P2400 - Crimp contact

1611637

https://www.phoenixcontact.com/in/products/1611637



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 10000, contact diameter: 1 mm, crimp range:  $0.08~\text{mm}^2$  ...  $0.22~\text{mm}^2$ 



1341930

https://www.phoenixcontact.com/in/products/1341930

#### PROT-M23PRO-OT-IP20 - Plastic protective cap

1055753

https://www.phoenixcontact.com/in/products/1055753



Plastic protective cap, M23, series: M23 PRO

#### PROT-M23PRO-OT-IP67 - Plastic protective cap

1055749

https://www.phoenixcontact.com/in/products/1055749



Plastic protective cap, M23, series: M23 PRO Signal



1341930

https://www.phoenixcontact.com/in/products/1341930

#### M23PRO-VIB-ORING-GN - Sealing ring

1521138

https://www.phoenixcontact.com/in/products/1521138

Vibration O-ring, optional accessory for M23 PRO device connectors



#### M23PRO-VIB-ORING-OR - Sealing ring

1521137

https://www.phoenixcontact.com/in/products/1521137

Vibration O-ring, optional accessory for M23 PRO device connectors



Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd. A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420 info@phoenixcontact.co.in