
# **BCS M08T4E2-PSM15C-S49G**

Order Code: BCS002A





1) Sensing surface, 2) Housing, 3) Potentiometer, 4) LED function indicator

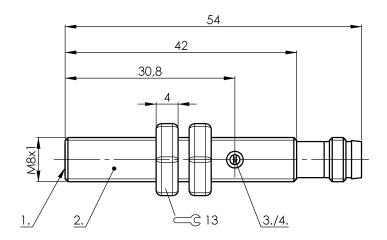





Dasic realures	Ba	sic	features	
----------------	----	-----	----------	--

Approval/Conformity	CE
	cULus
	WEEE
Basic standard	IEC 60947-5-2
Scope of delivery	Screwdriver
	Nut (2x)
	Short guide
Sensitivity	Switching distance adjustable
Series	M08

## Display/Operation

**Function indicator** yes

## **Electrical connection**

Connection	M8x1-Male, 3-pin
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

#### **Electrical data**

No-load current lo max. at Ue	10 mA
Operating voltage Ub	1130 VDC
Rated insulation voltage Ui	75 V DC
Rated operating current le	50 mA
Rated operating voltage Ue DC	24 V
Ripple max. (% of Ue)	10 %
Switching frequency	100 Hz
Utilization category	DC -13
Voltage drop static max.	2 V

## **Environmental conditions**

Ambient temperature	-1070 °C
Contamination scale	1
IP rating	IP65

### **Functional safety**

MTTF (40	°C)	444 a

### Interface

Switching output	PNP normally open (NO)

### Material

Housing material	1.4301 stainless steel
Material sensing surface	PTFE

## **Capacitive Sensors**

# BCS M08T4E2-PSM15C-S49G Order Code: BCS002A



### Mechanical data

DimensionØ 8 x 54 mmInstallationfor flush mountingSizeM8x1Thread (A)M8x1Tightening torque6 Nm

## Range/Distance

Hysteresis H max. (% of Sr) 15.0 %

Measuring range 0.1...1.5 mm

Rated operating distance Sn 1.5 mm

Repeat accuracy max. (% of Sr) 2.0 %

Temperature drift max. (% of Sr) 15 %

#### Remarks

The potentiometer does not have a fixed stop, but can be turned endlessly without destroying anything.


If no change in the switching signal is detected, the potentiometer should be turned forwards or backwards until a signal change occurs at the output. For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

## **Connector Drawings**



## **Wiring Diagrams**



2/2