

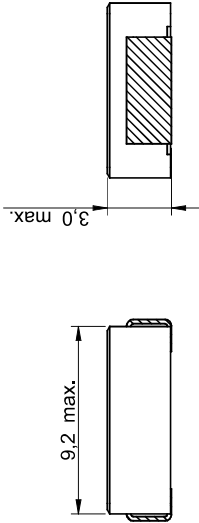


Dimensions: [mm]




Scale - 3:1

Product Marking:

Marking	150 (Inductance Code)
Marking - Date Code	YWW
Start of Winding	•


Recommended Land Pattern: [mm]

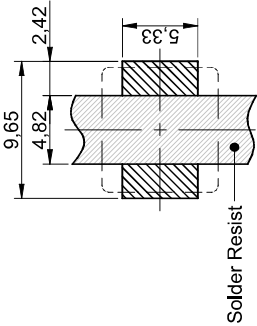

No vias and traces in restricted area.

Scale - 3:1

Schematic:



Electrical Properties:

Properties	Test conditions	Value	Unit	Tol.
Inductance	L 100 kHz/ 10 mA	15	µH	±20%
DC Resistance	R _{DC} @ 20 °C	85.5	mΩ	max.
DC Resistance	R _{DC} @ 20 °C	80	mΩ	typ.
Self Resonant Frequency	f _{res}	9	MHz	typ.

Certification:

Rohs Approval	Compliant [2011/65/EU&2015/863]
REACH Approval	Conform or declared [IEC]1907/2006]
Halogen Free	Conform [JEDEC JS709B]
Halogen Free	Conform [IEC 61249-2-21]

General Properties:


Ambient Temperature (referring to I _p)	-40 up to +85 °C
Operating Temperature	-40 up to +125 °C
Storage Conditions (in original packaging)	< 40 °C ; < 75 % RH
Moisture Sensitivity Level (MSL)	1
Test conditions of Performance Rated Current: refer to IEC 62024-2-2020, Class C (PCB Copper Width: 40 mm; PCB Copper Thickness: 105 µm)	
Temperature rise is highly dependent on many factors including PCB land pattern, trace size, and proximity to other components. Therefore, temperature rise should be verified in application conditions.	
Start of Winding: Winding towards clockwise	

		 WÜRTH ELEKTRONIK MORE THAN YOU EXPECT		Wurth Elektronik eISos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Walldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.wue-online.com eISos@wue-online.com							
DECLARED e1a		REVISION 002.001		DATE (YY-MM-DD) 2023-11-09		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD 			
DESCRIPTION		WE-LHMI SMT Power Inductor						ORDER CODE 74437356150			
SEC/TYPE 8030		BUSINESS UNIT eISos		STATUS Valid						PAGE 1/8	


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death. Unless the notice here once had an agreement specifically covering a different use, Würth Elektronik eISos GmbH & Co. KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear power, disaster prevention, medical, public information network, etc. Würth Elektronik eISos GmbH & Co. KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

The drawing illustrates a multi-layer PCB with the following dimensions and labels:

- Top View (Left):** Shows a rectangular board with overall width W and overall length A . The distance between the centers of the two inner rectangular cutouts is $P1$. The width of each cutout is $B0$. The distance from the left edge to the center of the first cutout is $P0$, and the distance between the centers of the two cutouts is $P2$. The distance from the left edge to the center of the first cutout is $P0$, and the distance between the centers of the two cutouts is $P2$. The distance from the left edge to the center of the first cutout is $P0$, and the distance between the centers of the two cutouts is $P2$.
- Top View (Right):** Shows the same rectangular board with overall width W and overall length A . The distance between the centers of the two inner rectangular cutouts is $P1$. The width of each cutout is $B0$. The distance from the left edge to the center of the first cutout is $P0$, and the distance between the centers of the two cutouts is $P2$. The distance from the left edge to the center of the first cutout is $P0$, and the distance between the centers of the two cutouts is $P2$. The distance from the left edge to the center of the first cutout is $P0$, and the distance between the centers of the two cutouts is $P2$.
- Side View (Bottom):** Shows the cross-section of the board with a total thickness of T . The top layer is labeled "Top Cover Tape". The distance from the top surface to the center of the board is $T1$, and the distance from the center to the bottom surface is $T2$. The distance from the left edge to the center of the board is $K0$.



	A	B	C	D	N	W1 (mm)	W2 (mm)	W3 (mm)	Material
Tolerance	± 0.2	min.	min.	min.	tvc.	+ 2.0	max.	init.	max.
Value	330.00	1.50	12.80	20.20	100.00	29.40	30.40	23.90	Polsownia 27.40



Tape width	24 mm	Pull-off force
		0,1 N - 1,3 N



**WURTH
ELEKTRONIK**
MORE THAN
YOU EXPECT

Wurth Elektronik eSOS GmbH & Co., KG
EMC & Invasive Solutions
Max-Eyth-Str. 1
74568 Völklingen
Germany
Tel. +49 (0) 79 42 945 -0
www.we-online.com
eSOS@we-online.com

**WÜRTH
ELEKTRONIK
MORE THAN
YOU EXPECT**

Würth Elektronik eiSos GmbH & Co. KG
EMC & Inductive Solutions
Max-Eyth-Str. 1
74638 Walcenburg
Germany
Tel. +49 (0) 79 42 945 - 0
www.we-online.com
eiSos@we-online.com

WE-LHMI SMT Power Inductor

ORDER CODE
74437356150


SIZE/TYPE

BUSINESS UNIT

2	
---	--


[illegible]

Packaging Specification - Carton: [mm]

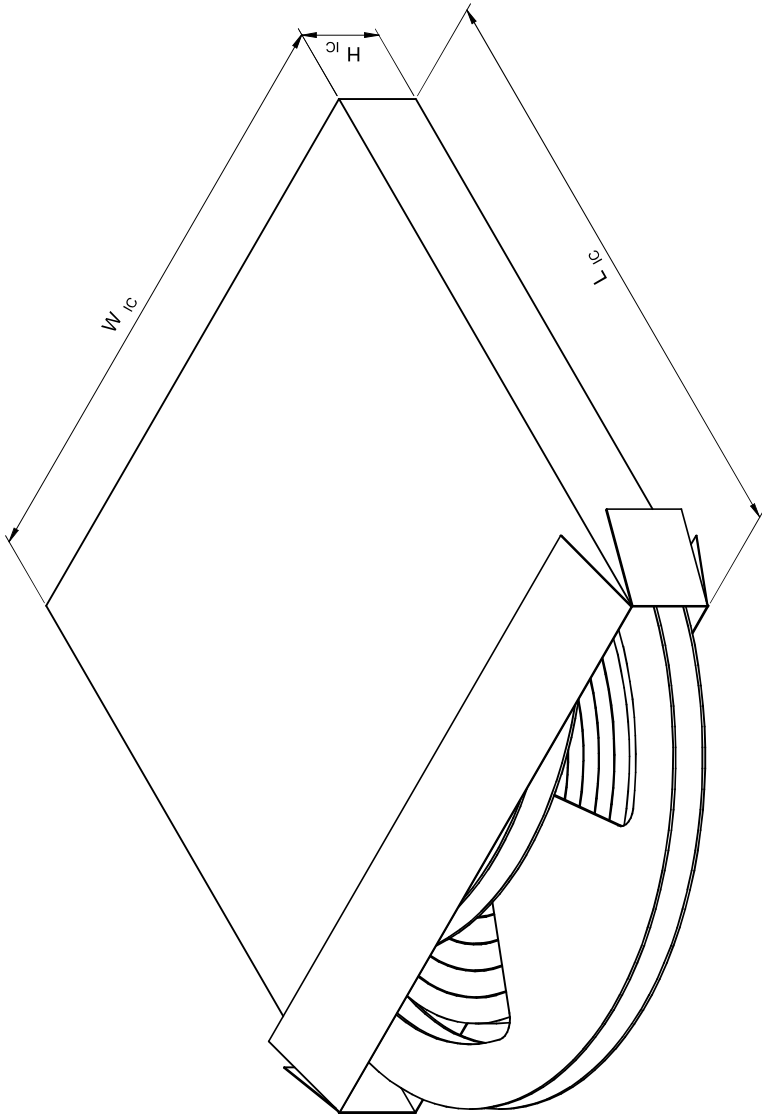

Packaging is referred to the international standard IEC 60286-3:2019

	L _c (mm)	W _c (mm)	H _c (mm)	No. of Reel (pcs.)	Qty. (pcs.)	Material
Tolerance	typ.	typ.	typ.			
Value	335,00	535,00	44,00	2	2000	Paper

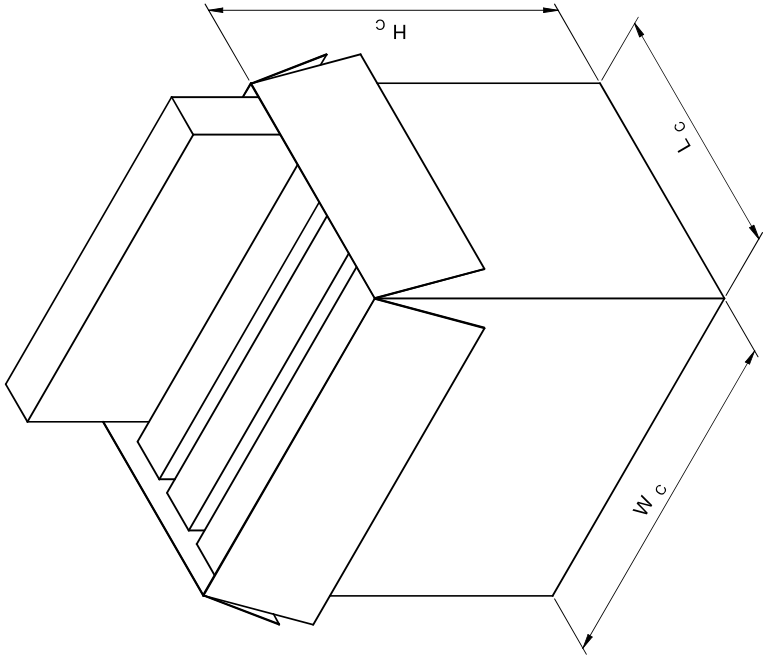

Packaging is referred to the international standard IEC 60286-3:2019

	L _c (mm)	W _c (mm)	H _c (mm)	No. of Inner Carton (pcs.)	Qty. (pcs.)	Material
Tolerance	typ.	typ.	typ.			
Value	252,00	348,00	354,00	4	8000	Paper


  			
DATE (YY-MM-DD) 2023-11-09		GENERAL TOLERANCE DIN ISO 2768-1m	
REVISION 002.001		PROJECTION METHOD	
CHECKED ela		DESCRIPTION WE-LHMI SMT Power Inductor	
WÜRTH ELEKTRONIK eSsS GmbH & Co. KG EMC & Machine Solutions Max-Eyth-Str. 1 74638 Walldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com esSs@we-online.com		ORDER CODE 74437356150	
 WÜRTH ELEKTRONIK MORE THAN YOU EXPECT		BUSINESS UNIT eSsS	
		SIZES/TYPE 8030	
		STATUS Valid	
		PAGE 4/8	

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have agreed an agreement specifically covering such use. Wurth Elektronik eSsS GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear power, defense, disaster prevention, medical, public information network etc.. Wurth Elektronik eSsS GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Classification Reflow Soldering Profile:



Properties	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly Package Thickness < 1.6 mm	260 °C	260 °C	260 °C
PB-Free Assembly Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
PB-Free Assembly Package Thickness > 2.5 mm	250 °C	245 °C	245 °C

 WURTH ELEKTRONIK MORE THAN YOU EXPECT		Wurth Elektronik eSas GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Walzenburg Germany Tel. +49 (0) 79 42 945 - 0 www.w-e-online.com eSas@w-e-online.com					
 ROHS COMPLIANT	 HALOGEN FREE	DATE (YYMM-3D) 2023-11-09	REVISION 002.001	CHECKED ela	DESCRIPTION WE-LHMI SMT Power Inductor	GENERAL TOLERANCE DIN ISO 2768-1 m	PROJECTION REFLOW 
ORDER CODE 74437356150		SERIALS Valid	BUSINESS UNIT eSas	PAGE 5/8			

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eGOS GmbH and its AG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation, transportation signal, disaster prevention, medical, public information network etc. Würth Elektronik eGOS GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient liability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability parameters or performance.

Further information

Component Libraries:

 [Download_IGS_WE-LHMI-8030](#)

 [Download_STP_WE-LHMI-8030](#)

Free Sample Order:

Order free samples of this article directly here!

Tutorials:

- [Single Coil Inductors \(PDF\)](#)

				 WÜRTH ELEKTRONIK MORE THAN YOU EXPECT Würth Elektronik eSsG GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Walldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com esSg@we-online.com			
CHECKED efa				REVISION 002.001	DATE (YYYY-MM-DD) 2023-11-09	GENERAL TOLERANCE DIN ISO 2768-1m	PROJECTION METHOD 
DESCRIPTION WE-LHMI SMT Power Inductor				ORDER CODE 74437356150			
				SIZE/TYPE 8030	BUSINESS UNIT eSsG	STATUS Valid	PAGE 6/8

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have agreed an agreement specifically covering such use. Würth Elektronik eSsG GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear power, disaster prevention, medical, public information network, etc.. Würth Elektronik eSsG GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Cautions and Warnings:

The following conditions apply to all goods within the product series of WE-LHMI of Würth Elektronik eiSos GmbH & Co. KG:

General:

- This electronic component is designed and manufactured for use in general electronic equipment.
 - Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required and/or if there is the possibility of direct damage or human injury.
 - Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
 - The component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
 - Do not drop or impact the components, the component may be damaged.
 - Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektronik's specifications, for its validity and sustainability over time.
 - The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products also apply to customer specific products.
- #### Product specific:
- #### Soldering:
- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
 - All other soldering methods are at the customers' own risk
 - Strong forces which may affect the coplanarity of the components' electrical connection with the PCB (i.e. pins), can damage the part, resulting in void of the warranty.

Cleaning and Washing:

- Washing agents used during the production to clean the customer application might damage or change the characteristics of the wire insulation, marking or plating. Washing agents may have a negative effect on the long-term functionality of the product.
- Using a brush during the cleaning process may break the wire due to its small diameter. Therefore, we do not recommend using a brush during the PCB cleaning process.

Potting:

- If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking could lead to an incomplete seal, allowing contaminants into the core. Expansion could damage the component. We recommend a manual inspection after potting to avoid these effects.

Storage Conditions:

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

Packaging:

- The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

Handling:

- Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.
- Applying currents with audio-frequency signals may result in audible noise due to the magnetostrictive material properties.
- The temperature rise of the component must be taken into consideration. The operating temperature is comprised of ambient temperature and temperature rise of the component. The operating temperature of the component shall not exceed the maximum temperature specified.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

   WÜRTH ELEKTRONIK MORE THAN YOU EXPECT  Würth Elektronik eiSos GmbH & Co. KG EPC & Machine Solutions Max-Eyth-Str. 1 74638 Walldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	CHECKED eifa	REVISION 002.001	DATE (YY/MM/DD) 2023-11-09	GENERAL TOLERANCE DIN ISO 2768-1m	PROJECTION METHOD 	WE-LHMI SMT Power Inductor		ORDER CODE 74437356150	
						SHEET/TYPE 8030		BUSINESS UNIT eiSos	
								PAGE 7/8	

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is especially regarded to cause severe personal injury or death, unless the parties have entered an agreement specifically governing such use. Würth Elektronik eiSos GmbH & Co. KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co. KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Important Notes

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG. Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

  WÜRTH ELEKTRONIK MORE THAN YOU EXPECT Würth Elektronik eiSos GmbH & Co. KG EPC & Machine Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com DESCRIPTION WE-LHMI SMT Power Inductor	ORDERED ela REVISION 002.001 DATE (YY-MM-DD) 2023-11-09 GENERAL TOLERANCE DIN ISO 2768-1m PROJECTION METHOD 	ORDER CODE 74437356150 STATUS Valid PAGE 8/8
SECT/TYPE 8030 BUSINESS UNIT eiSos		

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have entered an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co. KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, clear control, submarine, transportation, transportation signal, disaster prevention, medical, public information network, etc.. Würth Elektronik eiSos GmbH & Co. KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.