




OSLON Pure 1414 1 PowerStar Whites

ILH-PU01-xx90-SC221-WIR200.

At the heart of each PowerStar is an OSLON® Pure 1414 chip scale LED. OSLON® Pure 1414 LEDs can be driven up to 1000mA while OSRAM's latest power chip technology remains efficient even at the highest drive currents. The OSLON Pure® 1414, one of the best lumen density, excellent efficiency and color homogeneity. PowerStars are compact, powerful LED light sources built on aluminium substrates for optimal thermal management. Available with 200mm wires as standard.

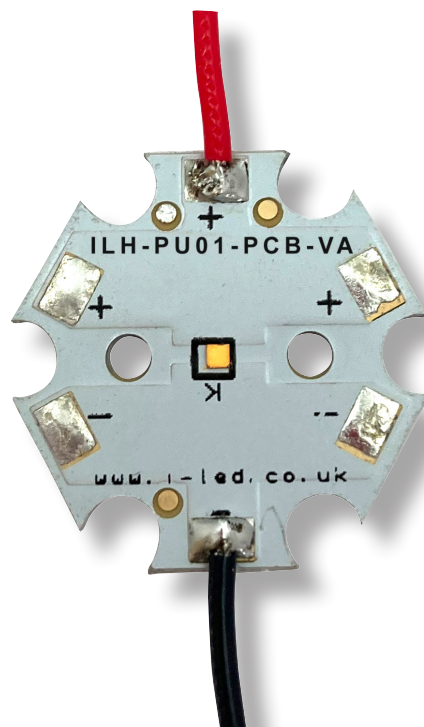

CONTENTS

Applications	page 2	Lens Options	page 6
Technical Features	page 2	Heatsink Options	page 6
Product Options	page 3	Power Supply Options	page 7
Minimum and Maximum Ratings	page 3	Thermal Interface Material Options	page 7
Accessories	page 4	Assembly Information	page 8
Technical Drawings	page 5	Important Information and Precautions	page 8
LED Radiation Diagram	page 5	Safety Information	page 9

APPLICATIONS

- » General lighting
- » Decorative lighting
- » Task lighting
- » Spot lighting
- » Downlighters
- » Retail lighting
- » Entertainment lighting

TECHNICAL FEATURES

LED Family	OSLON® Pure 1414
Lifetime	Up to 100,000 hours lifetime to 70% of original brightness
Mounting	Mounting holes using M3 screws allow easy installation
Dimensions (L x W x H)	20 x 20 x 2.35mm
Wiring	Available with 200mm connecting wires
Lenses	A secondary lens can be fitted. Suitable options on page 6 or visit our website for a full range
Heatsinks	Required over 350mA. Suitable options on page 6 or visit our website for a full range
Power Supply	4 - 75W dimming and non dimming. Suitable options on page 7 or visit our website for a full range
Chain	PowerStars can be linked together to produce longer chains
Current Range	10-1000mA
Thermal Resistance	5.9K/W

PRODUCT OPTIONS

ILS Part Number	Colour	Colour Temp (Degrees Kelvin)	Typical Power W §		Forward Voltage	Flux † at 350mA	Radiance Angle	Relevant OSRAM LED Data
			at 350mA	at 700mA				
ILH-PU01-UW90-SC221-WIR200.	Ultra-Warm	1800K	0.98W	1.96W	2.6-3.0V	70lm	120° (±60°)	GW VJLPL1.CM
ILH-PU01-HW90-SC221-WIR200.	Hot White	2700K	0.98W	1.96W	2.6-3.0V	105lm	120° (±60°)	GWVJLPL1.CM
ILH-PU01-WM90-SC221-WIR200.	Warm White	3000K	0.98W	1.96W	2.6-3.0V	105lm	120° (±60°)	GWVJLPL1.CM
ILH-PU01-QZ90-SC221-WIR200.	Quartz White	3500K	0.98W	1.96W	2.6-3.0V	115lm	120° (±60°)	GWVJLPL1.CM
ILH-PU01-NW90-SC221-WIR200.	Neutral White	4000K	0.98W	1.96W	2.6-3.0V	115lm	120° (±60°)	GWVJLPL1.CM
ILH-PU01-WH90-SC221-WIR200.	White	5000K	0.98W	1.96W	2.6-3.0V	120lm	120° (±60°)	GWVJLPL1.CM
ILH-PU01-UL90-SC221-WIR200.	Ultra White	6500K	0.98W	1.96W	2.6-3.0V	115lm	120° (±60°)	GWVJLPL1.CM

Due to the special conditions of the manufacturing processes of LEDs, the typical data of technical parameters can only reflect overall statistical figures, and do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data.

§ Tolerance +/- 10%

† Measured with 20mS 350mA pulse at 85 °C

MINIMUM AND MAXIMUM RATINGS

ILS Part Number	Operating Temperature at Tc-Point [°C]	Storage Temperature [°C]	Forward Current per chip [mA]	Reverse Voltage [Vdc]
ILH-PU01-UW90-SC221-WIR200.	-40 °C ~ 100 °C	-40 °C ~ 100 °C	10-1000mA	Not designed for reverse operation
ILH-PU01-HW90-SC221-WIR200.	-40 °C ~ 100 °C	-40 °C ~ 100 °C	10-1000mA	Not designed for reverse operation
ILH-PU01-WM90-SC221-WIR200.	-40 °C ~ 100 °C	-40 °C ~ 100 °C	10-1000mA	Not designed for reverse operation
ILH-PU01-QZ90-SC221-WIR200.	-40 °C ~ 100 °C	-40 °C ~ 100 °C	10-1000mA	Not designed for reverse operation
ILH-PU01-NW90-SC221-WIR200.	-40 °C ~ 100 °C	-40 °C ~ 100 °C	10-1000mA	Not designed for reverse operation
ILH-PU01-WH90-SC221-WIR200.	-40 °C ~ 100 °C	-40 °C ~ 100 °C	10-1000mA	Not designed for reverse operation
ILH-PU01-UL90-SC221-WIR200.	-40 °C ~ 100 °C	-40 °C ~ 100 °C	10-1000mA	Not designed for reverse operation

Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED module.

Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED module.

The temperature of the LED module must be measured at the Tc-Point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label.

ACCESSORIES

Lenses



LEDiL precision-engineered lenses allow for rapid deployment of all types of light fixtures, including street lights, wall-wash, high-bay, sconces, emergency beacons, parking garage/low-bay, MR and AR downlights, and dock lights. Precision-engineered for maximum efficiency and durability, LEDiL lenses are released alongside the latest products from our LED suppliers. Suitable options on [page 6](#) or visit [our website](#) for a full range.

Heatsinks



ILS has a series of aluminium alloy heatsinks to be used with our standard range of PowerStars and PowerClusters. These Heatsinks are supplied with fixing screws for the light engine and for fixing to a base plate. They also come with Thermal Interface Material (TIM) attached to the top surface. Suitable options on [page 6](#) or visit [our website](#) for a full range.


Power Supplies

ILS has a comprehensive range of standard power supplies. The table below shows the total number of ILS products each power supply can drive. Additional power supplies are being introduced so please call us or [check our website](#) for the latest offering. Suitable options on [page 7](#)



Thermal Interface Material (TIM)


ILS has produced a range of high-performance, cost effective Thermal Interface Materials to perfectly match their standard products. Our product fills the air pockets between the two surfaces, forming a continuous layer to conduct heat away from the LED to the heatsink. ILS offers TIM in three options – double sided adhesive, single sided adhesive and non adhesive. Suitable options on [page 7](#) or visit [our website](#) for a full range.

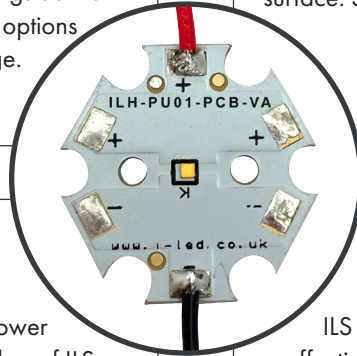

TECHNICAL DRAWINGS (MM)

3D drawing files are available on request from ILS. Please call or email.

RADIATION OF SINGLE LED

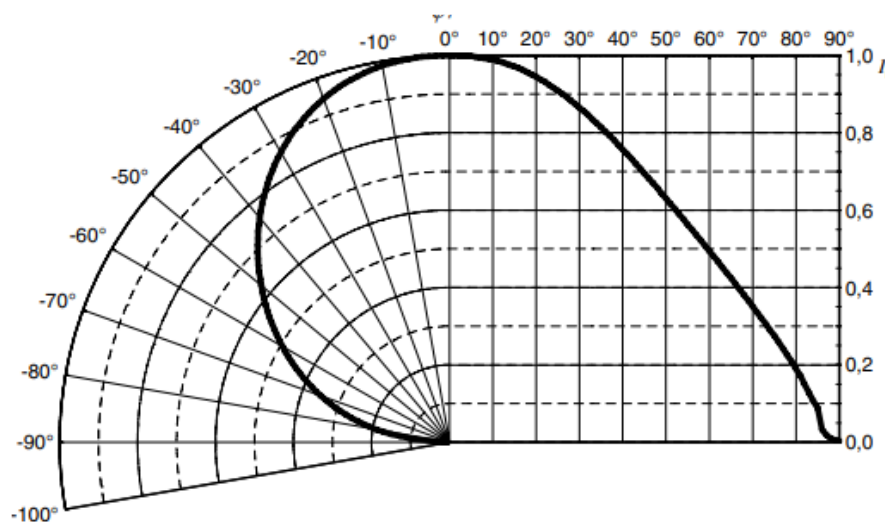


LENS OPTIONS

LENSES

Part Number	Beam	Size	Height	Family	FWHM	Material	Colour	Fastening
CP12939_LARISA-RS-CLIP16	Spot	10x10mm	7.5mm	Larisa	19	PMMA	Black	Clips
CP12941_LARISA-M-CLIP16	Medium	10x10mm	7.5mm	Larisa	30	PMMA	Black	Clips
CP12943_LARISA-O-CLIP	Oval	10x10mm	7.5mm	Larisa	40 x 20	PMMA	Black	Clips
CP12945_LARISA-W-CLIP	Wide	10x10mm	7.5mm	Larisa	50	PMMA	Black	Clips
CP12947_LARISA-WW-CLIP	Wide	10x10mm	7.5mm	Larisa	55	PMMA	Black	Clips
FP11055_LISA2-RS-PIN	Spot	10mm?	7mm	Lisa2	14	PMMA	Black	Pin + Glue
FP11001_LISA2-M-PIN	Medium	10mm?	7mm	Lisa2	22	PMMA	Black	Pin + Glue
FP11002_LISA2-W-PIN	Wide	10mm?	7mm	Lisa2	41	PMMA	Black	Pin + Glue
FP11003_LISA2-WW-PIN	Wide	10mm?	7mm	Lisa2	63	PMMA	Black	Pin + Glue
FP11429_LISA2-WWW-PIN	Spot	10mm?	7mm	Lisa2	28	PMMA	Black	Pin + Glue
FP16558_LISA3-RS-PIN	Spot	10mm?	7mm	Lisa2	14	PMMA	Black	Pin + Glue
FP16559_LISA3-M-PIN	Medium	10mm?	7mm	Lisa2	22	PMMA	Black	Pin + Glue
FP16560_LISA3-W-PIN	Wide	10mm?	7mm	Lisa2	30	PMMA	Black	Pin + Glue
FP16561_LISA3-WW-PIN	Wide	10mm?	7mm	Lisa2	42	PMMA	Black	Pin + Glue
FP16562_LISA3-WWW-PIN	Wide	10mm?	7mm	Lisa2	58	PMMA	Black	Pin + Glue
C17521_LISA4-RS	Spot	10mm?	7mm	Lisa4	14	PMMA	Black	Pin + Glue
C17522_LISA4-M	Medium	10mm?	7mm	Lisa4	24	PMMA	Black	Pin + Glue
C17523_LISA4-W	Wide	10mm?	7mm	Lisa4	32	PMMA	Black	Pin + Glue
C17524_LISA4-WW	Wide	10mm?	7mm	Lisa4	42	PMMA	Black	Pin + Glue
C17525_LISA4-WWW	Wide	10mm?	7mm	Lisa4	32	PMMA	Black	Pin + Glue
C17526_LISA4-O	Oval	10mm?	7mm	Lisa4	52	PMMA	Black	Pin + Glue

[Click here to visit our website for our latest range](#)

HEATSINK OPTIONS

ILS Product		350mA	500mA	700mA
No heatsink, in free air				
ILA-HSINK-STAR-50X20MM				

KEY

	Operates under the recommended ILS junction temperature
	Operates under the recommended LED maximum junction temperature
	Not suitable for use
	Heatsink not designed for use with this product

[Click here to visit our website for our latest range](#)

POWER SUPPLY OPTIONS

	ILS Driver Part Number	Rating	Current	PowerStars per LED Driver	Dimming
	IZC035-004F-4065C-SAL	4W	350mA	2-4	No
	IZC070-004F-4065C-SAL	4W	700mA	1-2	No
	IZC035-008F-5065C-SA	8W	350mA	2-12	No
	IZC070-008F-5065C-SA	8W	700mA	2-4	No
	OTI-DALI-10/220-240/700-NFC	10W	150-700mA	1-16	DALI
	OTE-13/220-240/350-PC	13W	350mA	7-13	Phase Cut
	OTI-QBM-20/220-240/500-NFC-I	20W	200-500mA	8-17	DALI + Bluetooth
	OT-FIT-30/220-240/700-CS	30W	500-700mA	9-15	No

[Click here to visit our website for our latest range](#)

THERMAL INTERFACE MATERIAL OPTIONS

Non Adhesive	Single Sided Adhesive	Double Sided Adhesive
ILA-TIM-STAR-OA	ILA-TIM-STAR-1A	ILA-TIM-STAR-2A.

Other sizes are available, including customised parts

[Click here to visit our website for our latest range](#)

ASSEMBLY INFORMATION

- » The mounting of the PowerStar has to be on a metal heatsink.
- » In order to optimise the thermal management, the metal surface needs to be clean (dirt and oil free) and planar for the best contact with the LED module. A thermal grease or heat transfer material is highly recommended.

IMPORTANT INFORMATION AND PRECAUTIONS



The PowerStar's LED, when powered up, is very bright. Thus it is advised that you do not look directly at it. Turn the PowerStar away from you and do not shine into the eyes of others.



PowerStars, when operated, can reach high temperatures thus there is risk of injury if they are touched.



PowerStars will overheat in operation if not attached to a suitable Heatsink. Overheating can cause failure or irreparable damage.



DO NOT HOT PLUG ON LED SIDE OF POWER SUPPLY.



Do not operate PowerStars with a Power Supply with unlimited current. Connection to constant voltage Power Supplies that are not current limited may cause the PowerStar to consume current above the specified maximum and cause failure or irreparable damage.



DO NOT TOUCH or PUSH on the LED as this can cause irreparable damage.

SAFETY INFORMATION



The LED module itself and all its components must not be mechanically stressed.



Assembly must not damage or destroy conducting paths on the circuit board.



The mounting of the module is carried out by attaching it at the mounting holes. Metal mounting screws must be insulated with synthetic washers to prevent circuit board damage and possible short circuiting.



To avoid mechanical damage to the connecting cables, the boards should be attached securely to the intended substrate. Heavy vibration should be avoided.



Observe correct polarity! Depending on the product, incorrect polarity will lead to emission of red or no light. The module can be destroyed!



Pay attention to standard ESD precautions when installing the PowerStars.



The PowerStars, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion. Damage by corrosion will not be accepted as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.



For outdoor usage, a housing is definitely required to protect the board against environmental influences. The design of the housing must correspond to the IP standards in the application. It is also the responsibility of the user to ensure any housings or modifications keep the Tc junction temperature to within stated ranges.



To also ease the luminaire/installation approval, electronic control gear for LED or LED modules should carry the CE mark and be ENEC certified. In Europe the declarations of conformity must include the following standards: CE: EC 61374-2-13, EN 55015, IEC 61547 and IEC 61000-3-2 - ENEC: 61374-2-13 and IEC/EN 62384.



The evaluation of eye safety occurs according to the standard IEC 62471:2006 ("photobiological safety of lamps and lamp systems"). Within the risk grouping system of this CIE standard, the LED specified in this datasheet falls into the class "moderate risk" (exposure time 0.25s). Under real circumstances (for exposure time, eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. As is also true when viewing other bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment and even accidents, depending on the situation.

FURTHER INFORMATION

The values contained in this datasheet can change due to technical innovation. Any such changes will be made without separate notification.

If you require further assistance or have a specific or custom enquiry, please contact the ILS team via email or phone. Alternatively please visit our website for more product info and to see our full ranges.



Unit 2, Berkshire Business Centre,
Berkshire Drive, Thatcham,
Berkshire, RG19 4EW
+44 (0)1635 294606

info@i-led.co.uk

<https://i-led.co.uk>

ABOUT ILS

ILS offers a high level of technical skill, professionalism and commercial understanding to companies requiring market-leading optoelectronics solutions. Offering conceptual advice, electronics design and manufacturing capability, we use high quality production resources both in-house and in Asia, providing project support from prototyping to mass production. We also understand the need to provide cost effective solutions and we do so using high quality components to ensure that the end product's reliability and quality is uncompromised. Apart from LEDs in the visible spectrum, we have a wide range of [Infrared](#), [UV LEDs](#), [UV tubes](#), and lasers.

ILS is a division of [Intelligent Group Solutions Ltd](#) (IGS) a well-established respected industry leading Optoelectronics solutions provider. Much of IGS' business comes from providing semi-custom or custom products both in component and sub-assembly form, and from providing design support and prototyping within the European market place. We can deliver production displays to wherever in the world that the customer's manufacturing or assembly is being undertaken.

INTELLIGENT GROUP SOLUTIONS DIVISIONS

