

MIRO 6.2 OPTO-COUPLER MODULE

IN: 30 VDC - OUT: 48 VDC / 0,1 A / 500kHz

Transistor 0.1 A


24 V DC


Switching frequency: max. 500 kHz

Spring clamp terminals

[Link to Product](#)

Illustration

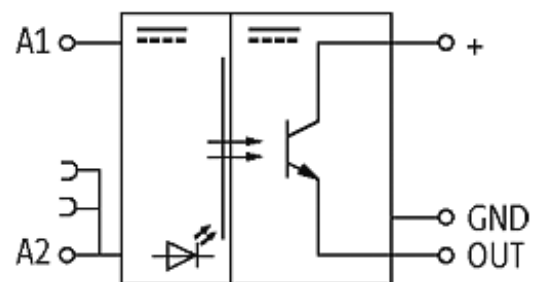

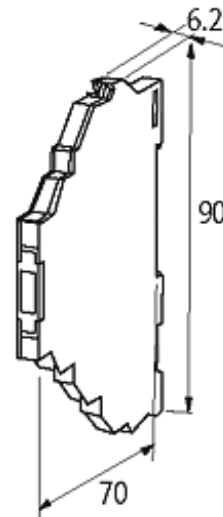

Product may differ from Image

Approvals



Input

Voltage range ON	10...30 V DC
Voltage range OFF	0...7 V DC
Control current	5.5 mA
LED display	LED (yellow)

General data

Test isolation voltage	2.75 kV
Housing	Black plastic, flame retardant
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Dimensions H × W × D	90×6.2×65 mm

Output

Switching voltage	5...48 V DC
Switching current per output	0...0.1 A
Saturation voltage (across output)	max. 1.2 V AC/DC
Leakage current (output is open)	max. 250 µA
Switching time ON/OFF	0.4/0.1 µs
Switching frequency	500 kHz (ohmic)

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1