ELECTRICAL INSTALLATION SOLUTIONS FOR BUILDINGS

Catalogue 2025 - 2nd edition

Product description, quick and easy selection of product codes

ENGINEERED TO OUTRUN

Our Smart Buildings catalogue provides a comprehensive overview of electrical installation solutions for buildings, combining innovation, safety, and energy efficiency. It is meant as a complete reference tool to help professionals select the right components and systems for any installation need.
With decades of expertise and a commitment to sustainability, we continue to deliver integrated solutions that make buildings smarter, safer, and more efficient.

ELECTRICAL INSTALLATION SOLUTIONS FOR BUILDINGS

INDEX

MINIATURE CIRCUIT-BREAKERS
RESIDUAL CURRENT DEVICES
ARC FAULT DETECTION DEVICES
ACCESSORIES FOR MCBS AND RCDS
PROTECTION AND SAFETY
COMMAND AND SIGNALING
CONTROL AND AUTOMATION
ENERGY EFFICIENCY
PLUG-IN SYSTEMS
LIGHT SWITCHES AND SOCKET OUTLETS
INSTALLATION MATERIAL
DIGITAL SERVICES
ABB I-BUS® KNX
ABB CYLON®
EMERGENCY_LIGHTING
ABB-FREE@HOME®
ABB-FLEXTRONICS®
DOOR ENTRY SYSTEM
INTRUSION ALARM SYSTEMS
SUBDISTRIBUTION BOARDS
CONSUMER UNITS
GENERAL PURPOSE ENCLOSURES
PEDESTALS
JUNCTION BOXES
NEMA STANDARD PRODUCTS
QUICK PRODUCT REFERENCES

TWO VOLUMES, ONE OBJECTIVE: TO ALWAYS FIND THE BEST SOLUTION

From a catalogue with two complementary volumes: streamline to simplify, analyse to choose.

The catalog electrical installation solutions for buildings comes in two separate but integrated volumes: one dedicated to the description and easy selection of products code and one for professionals searching for in-depth details and specifications, installation examples and special technical solutions.

Electrical installation solutions for buildings

An indispensable tool for those who are looking for easy selection of a completely reliable range of products

The main catalogue summarizes all the technical-commercial characteristics of the products, allows one to navigate between the main characteristics, descriptions, specifications, accessories, product pictures, illustrations and information about the individual codes.
The catalogue is a helpful product guide, which makes easier the orientation in a very complex product range of ABB products for electrical installation in buildings.

Electrical installation solutions for buildings - Technical details

Technical details and information, application examples, installation solutions: the complete ABB know how at the service of professionals

The technical addendum dedicated to technical-applicative details provides professionals with a series of specialized information such as the operating curve, selectivity tables, connection diagrams, etc.
The numbers of chapters in the technical addendum match with the same chapters in the main catalog.

Two volumes that reference each other, which are manageable and easily consultable, designed for those who wish to find the clearest solution in the least possible time.

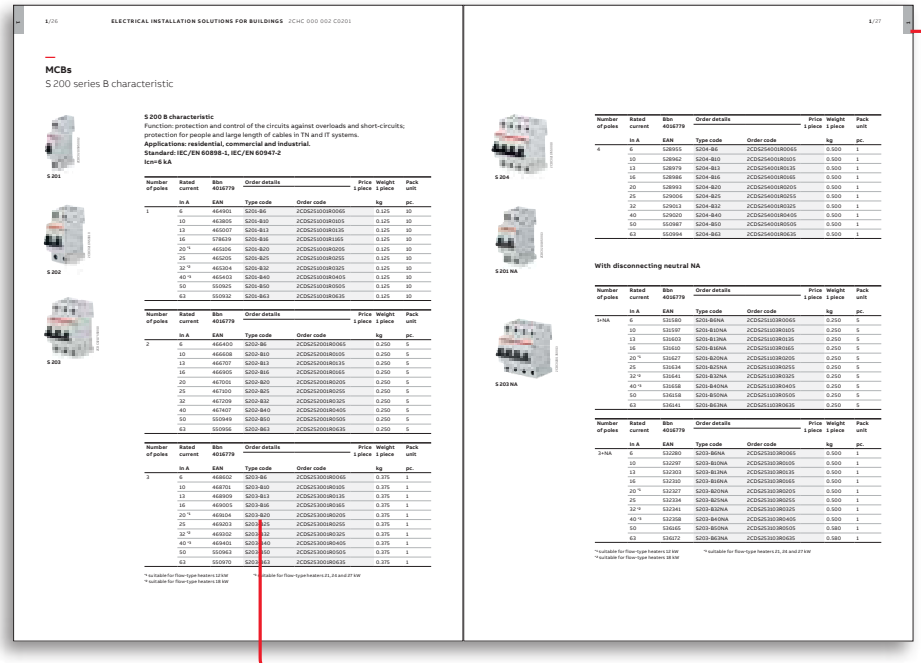

Arguments developed with same logical sequence

Same reference heading

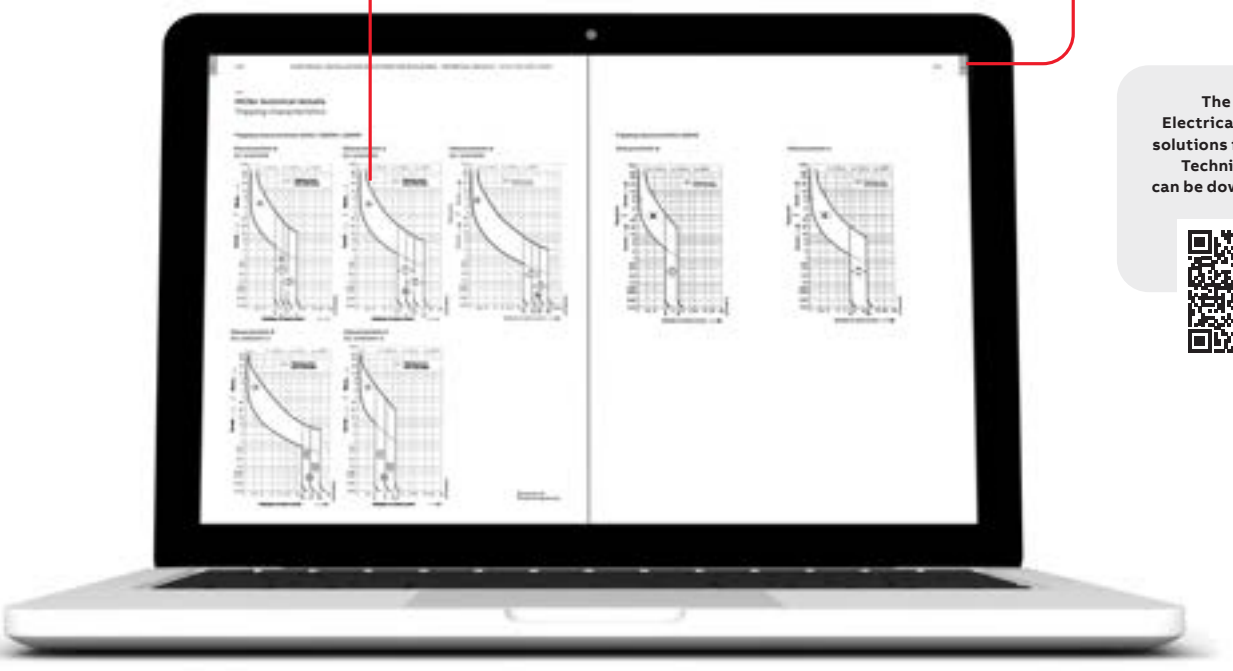

The volume Electrical installation solutions for buildings can be downloaded here

TIP:
You can always find a detailed online information about the particular product item:

Just type down this URL address: **http://new.abb.com/products/** and add the product order code at the end like e.g. http://new.abb.com/products/**2CDS274337R0158**)

The volume Electrical installation solutions for buildings - Technical details can be downloaded here

ELECTRICAL INSTALLATION SOLUTIONS FOR BUILDINGS

Quality of life, living comfort and safety

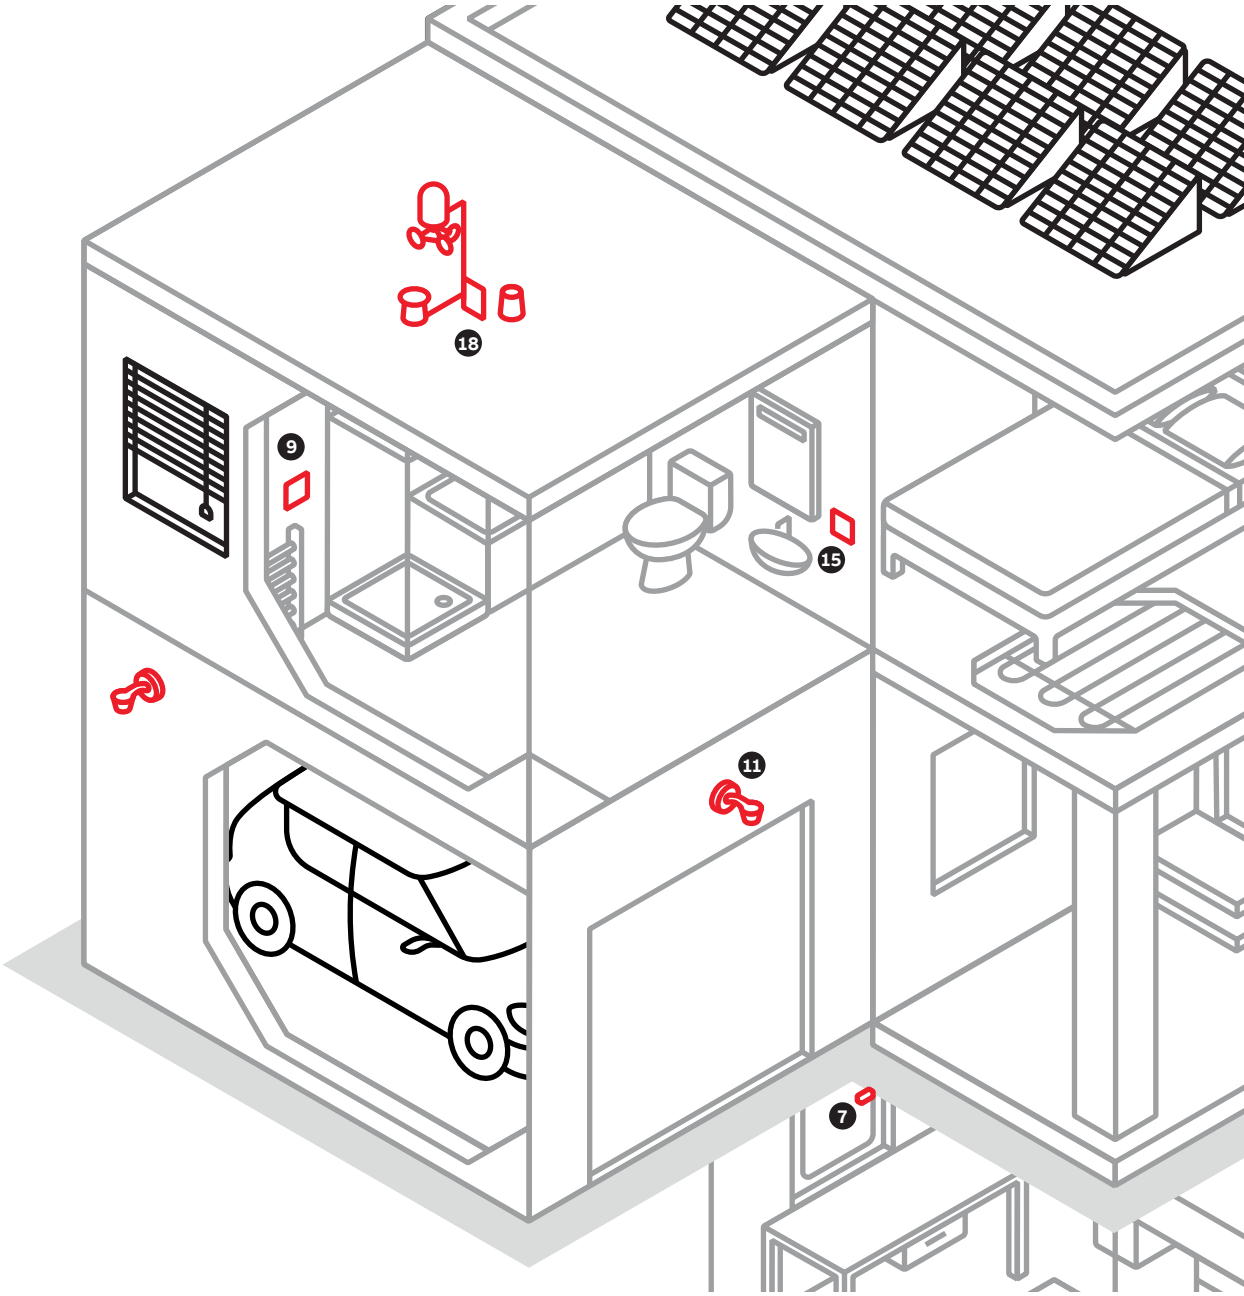

1. Safety switch
2. Energy meter
3. Small and home distributor
4. Smoke detectors
5. Movement detectors
6. Photovoltaic inverter
7. CO2 indoor air sensor
8. Switches and socket outlets
9. Room temperature controller with venetian blind control unit
10. Busch-DigitalRadio
11. Movement detector
12. Access control systems
13. Burglar alarm systems
14. ABB i-bus® KNX touch panel
15. Safety socket outlets
16. Communications socket outlets

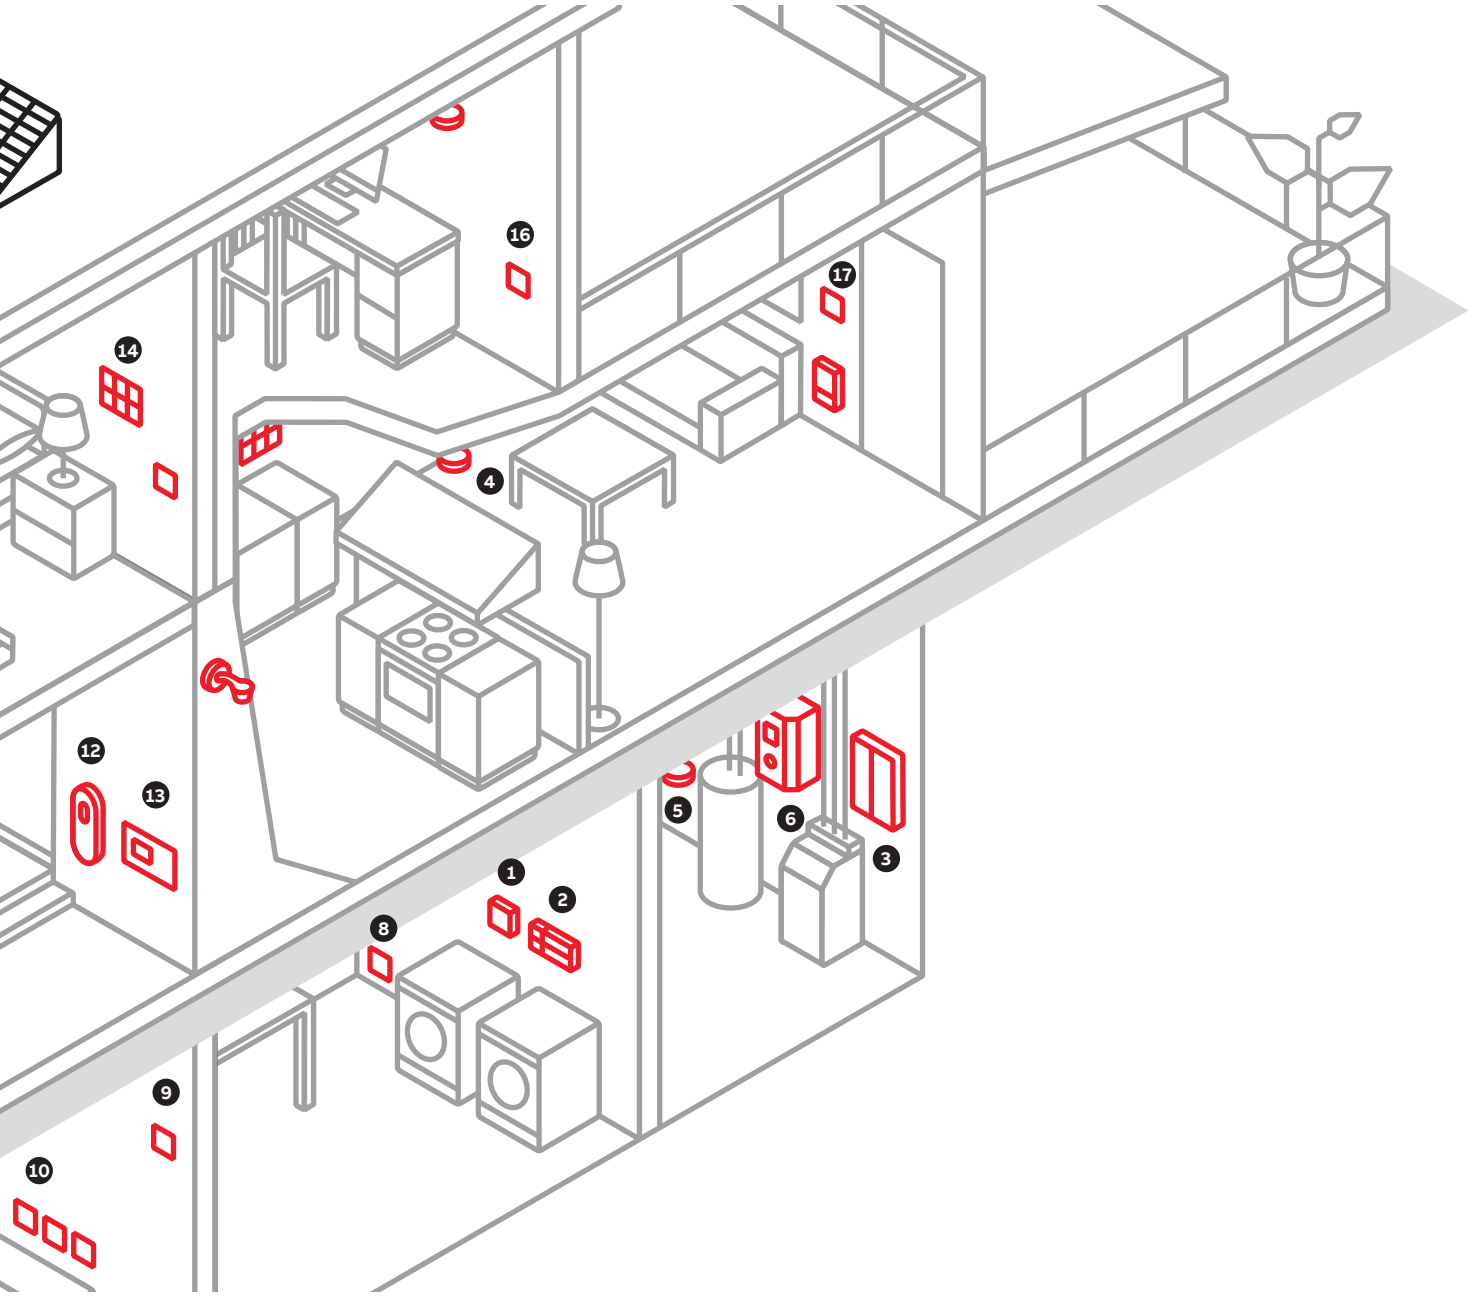

17. Switches and socket outlets for outdoor and wet areas
18. Weather sensor unit

ELECTRICAL INSTALLATION SOLUTIONS FOR BUILDINGS

Solutions for commercial and industrial buildings

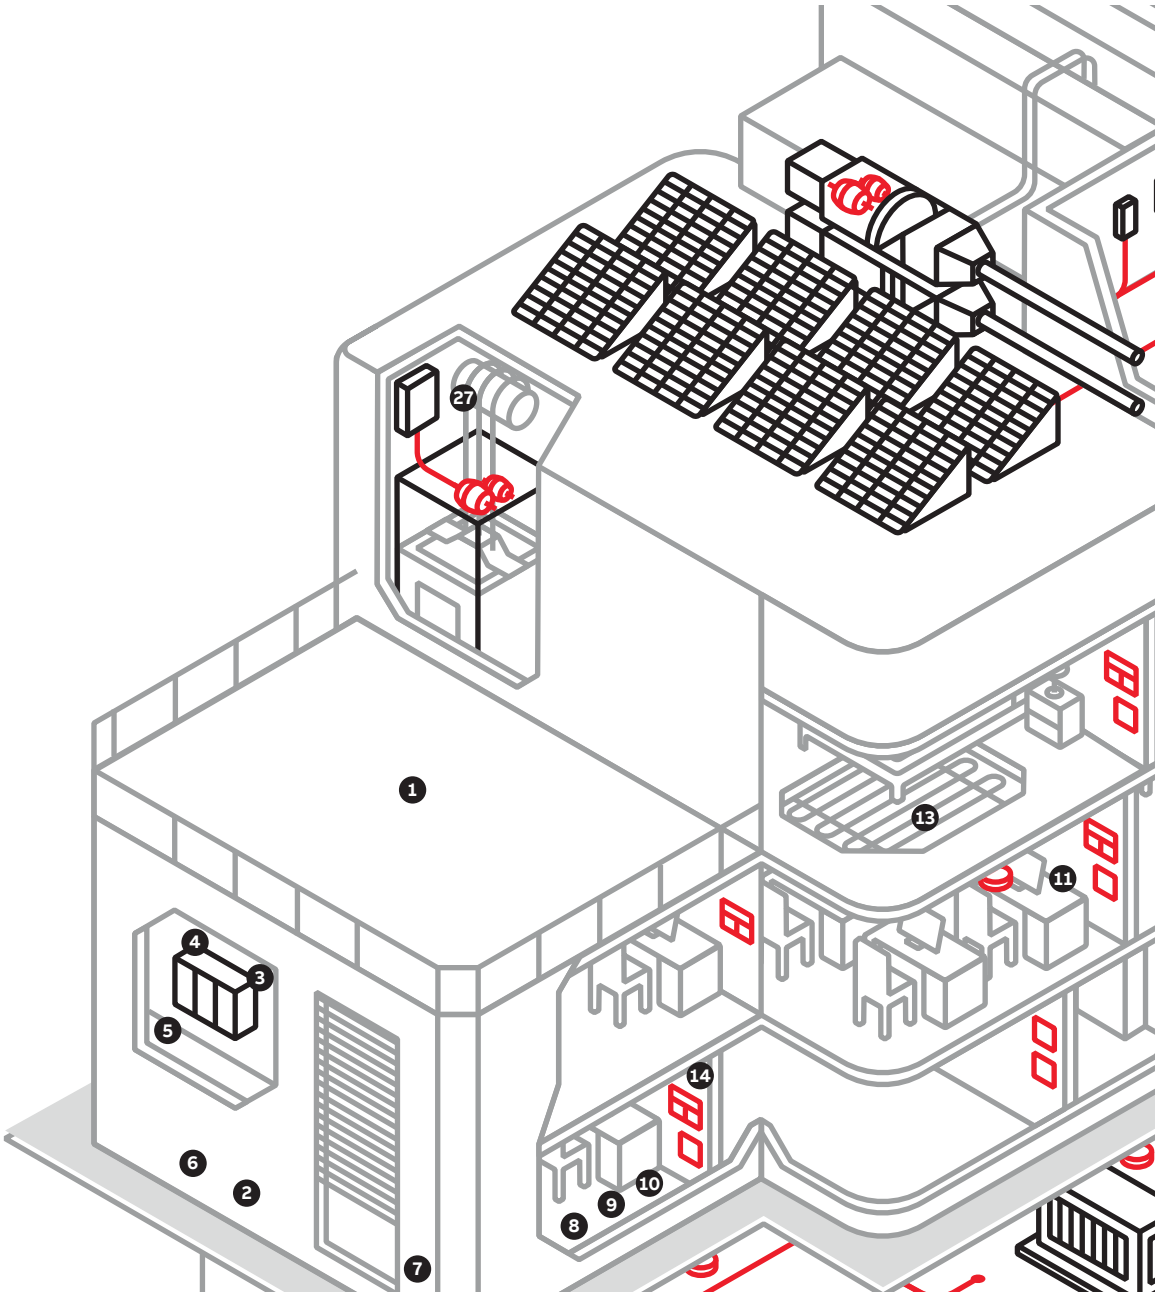

1. Lightning protection
2. Circuit breakers
3. Central battery systems
4. Cable ties and accessories
5. Cable connections
6. Distributors
7. Energy meter
8. Industrial connectors
9. Terminal blocks
10. Push-button
11. Non-metallic, flexible cable ducts
12. Cable duct, cable ties
13. Protection relay
14. AC & DC switches in housing
15. Bus modules
16. Overvoltage protection devices
17. Earth-fault relay
18. Door communication

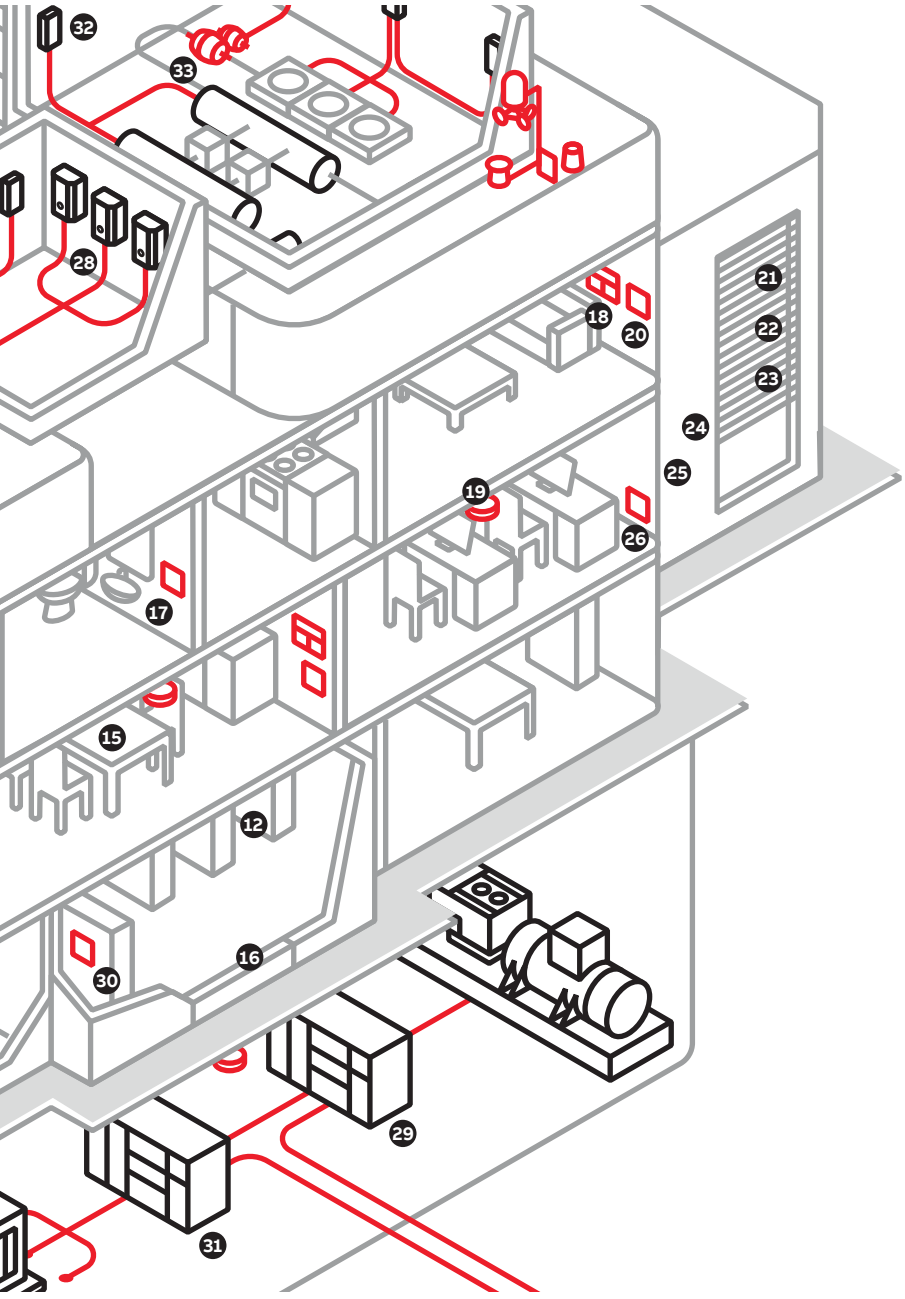

19. Emergency lighting
20. Timers
21. Electrical and grounding connections
22. Safety components
23. Electrical distribution systems
24. Motor starter combinations, soft starters
25. Energy distribution unit
26. Cable connections & accessories
27. EMC safety switch
28. DC load-break switches
29. Tmax XT power circuit breaker
30. OT load-break switches
31. XLP safety load-break switch
32. Safety switches for aeration or air-conditioning systems
33. HVAC controls

MINIATURE CIRCUIT-BREAKERS

Electrical installation solutions for buildings
Miniature circuit-breakers

Index

Quick selection of MCBs	2

MCBs S 200

S 200 technical features	28
S 200 series, 6 kA	36
S 200 M series, 10 kA	50
S 200 MR series, 10kA	64
S 200 M UC series, 10 kA	66
SU 200 M series, 10 kA	92
SU 200 MR series, 10 kA	104
SU 200DC series, 125 V DC	106

MCBs S 300

S 300 technical features	28
S 300 P series, 25kA	75
M 300 P series, 25kA, magnetic only	90

MCBs SN 201

SN 201 L series, 4.5 kA	114
SN 201 series, 6 kA	115
SN 201 M series, 10 kA	117

MCBs S200C

S200C series from 4,5 kA to 10 kA	118

MCBs S200 80-100A

S 200 80-100A series, 6 kA	128

MCBs for transportation application

S 200 MT	132
S 200 MT UC	145
S 202 TC	155
S 200 MTR / S 200 MTR DC	157
S 200 MTR / S 200 MTR DC	173

SMCBs S 750 DR

S 750 DR series	184

S800 standard range

S800 technical features	194
S800P series, 50kA	194
S800S series, 50kA	196
S800N series, 36 kA	198
S800C series, 25 kA	200
S800B series, 16 kA (obsolete from Q4 2025)	202

S800 for direct current and high voltage

S800S-UC technical features	238
S800S-UC series, up to 1000 VDC	240
S800PV technical features	248
S800PV series, up to 1500 VDC	250
S800PV switch disconnectors	252
S800HV technical features	253
S800HV series, up to 1000 VAC	254

S800 UL 489

Technical features	256
S800U series, 50kA	259
S800U-UCZ series, 600 VDC	262
S800U-PVS series, up to 1500 VDC	263

System pro M compact®
Quick selection of MCBs for household and industrial applications

Easy! Find the right range and the corresponding catalogue page at a glance using this selection chart.

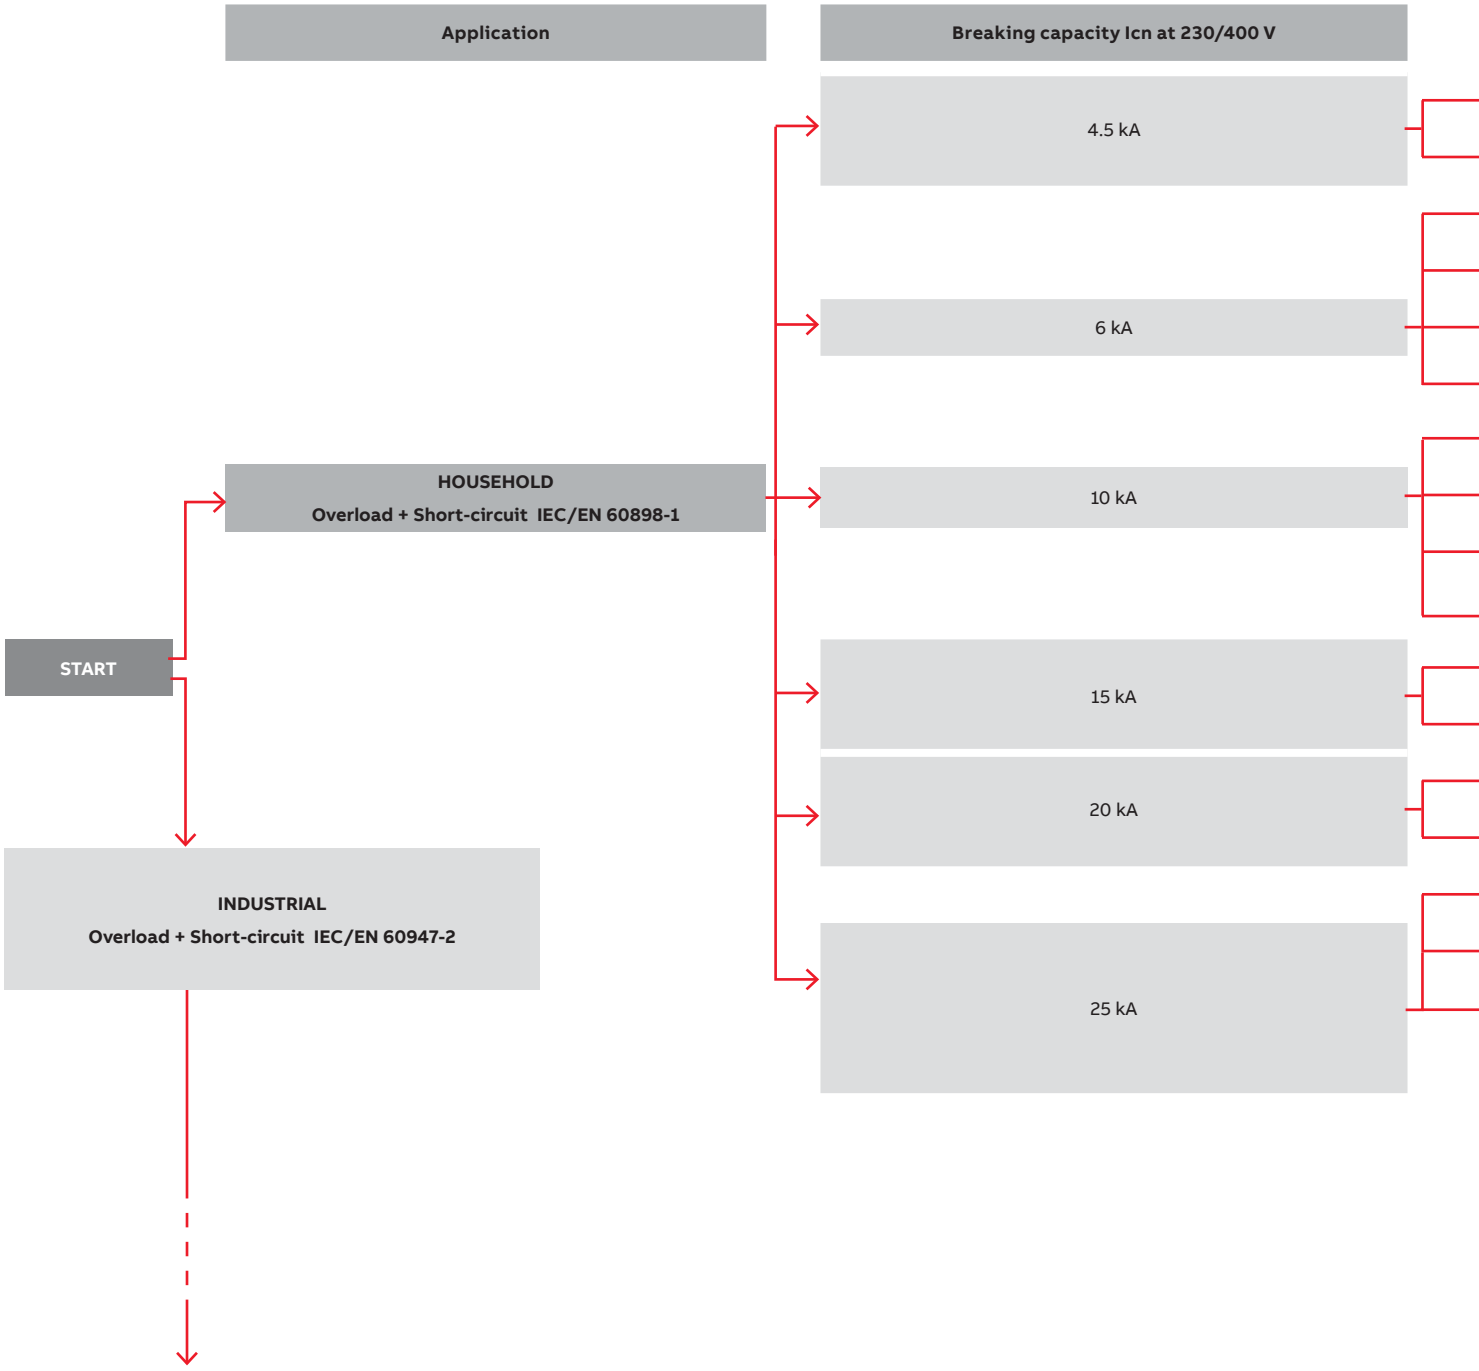

System pro M compact®

Quick selection of MCBs for household and industrial applications

Rated current	Poles	Solution
Up to 40 A	2,3,4	S200CL
Up to 40 A	1P+N	SN 201 L
Up to 40 A	1+1,2,3,4	S200C
Up to 40 A	1P+N	SN 201
Up to 63 A	All poles	S 200
Up to 100 A	All poles	80-100A
Up to 40 A	1P+N	SN 201 M
Up to 32 A	2	S200CM
Up to 63 A	All poles	S 200 M
Up to 63 A	All poles	S800B
Up to 63 A	All poles	S800C
Up to 63 A	All poles	S300P
Up to 40 A	All poles	S300P
Up to 63 A	All poles	S800N
Up to 25 A	All poles	S300P
Up to 100 A	All poles	S 750 DR
Up to 63A	All poles	S800S

System pro M compact®

Quick selection of MCBs for household and industrial applications

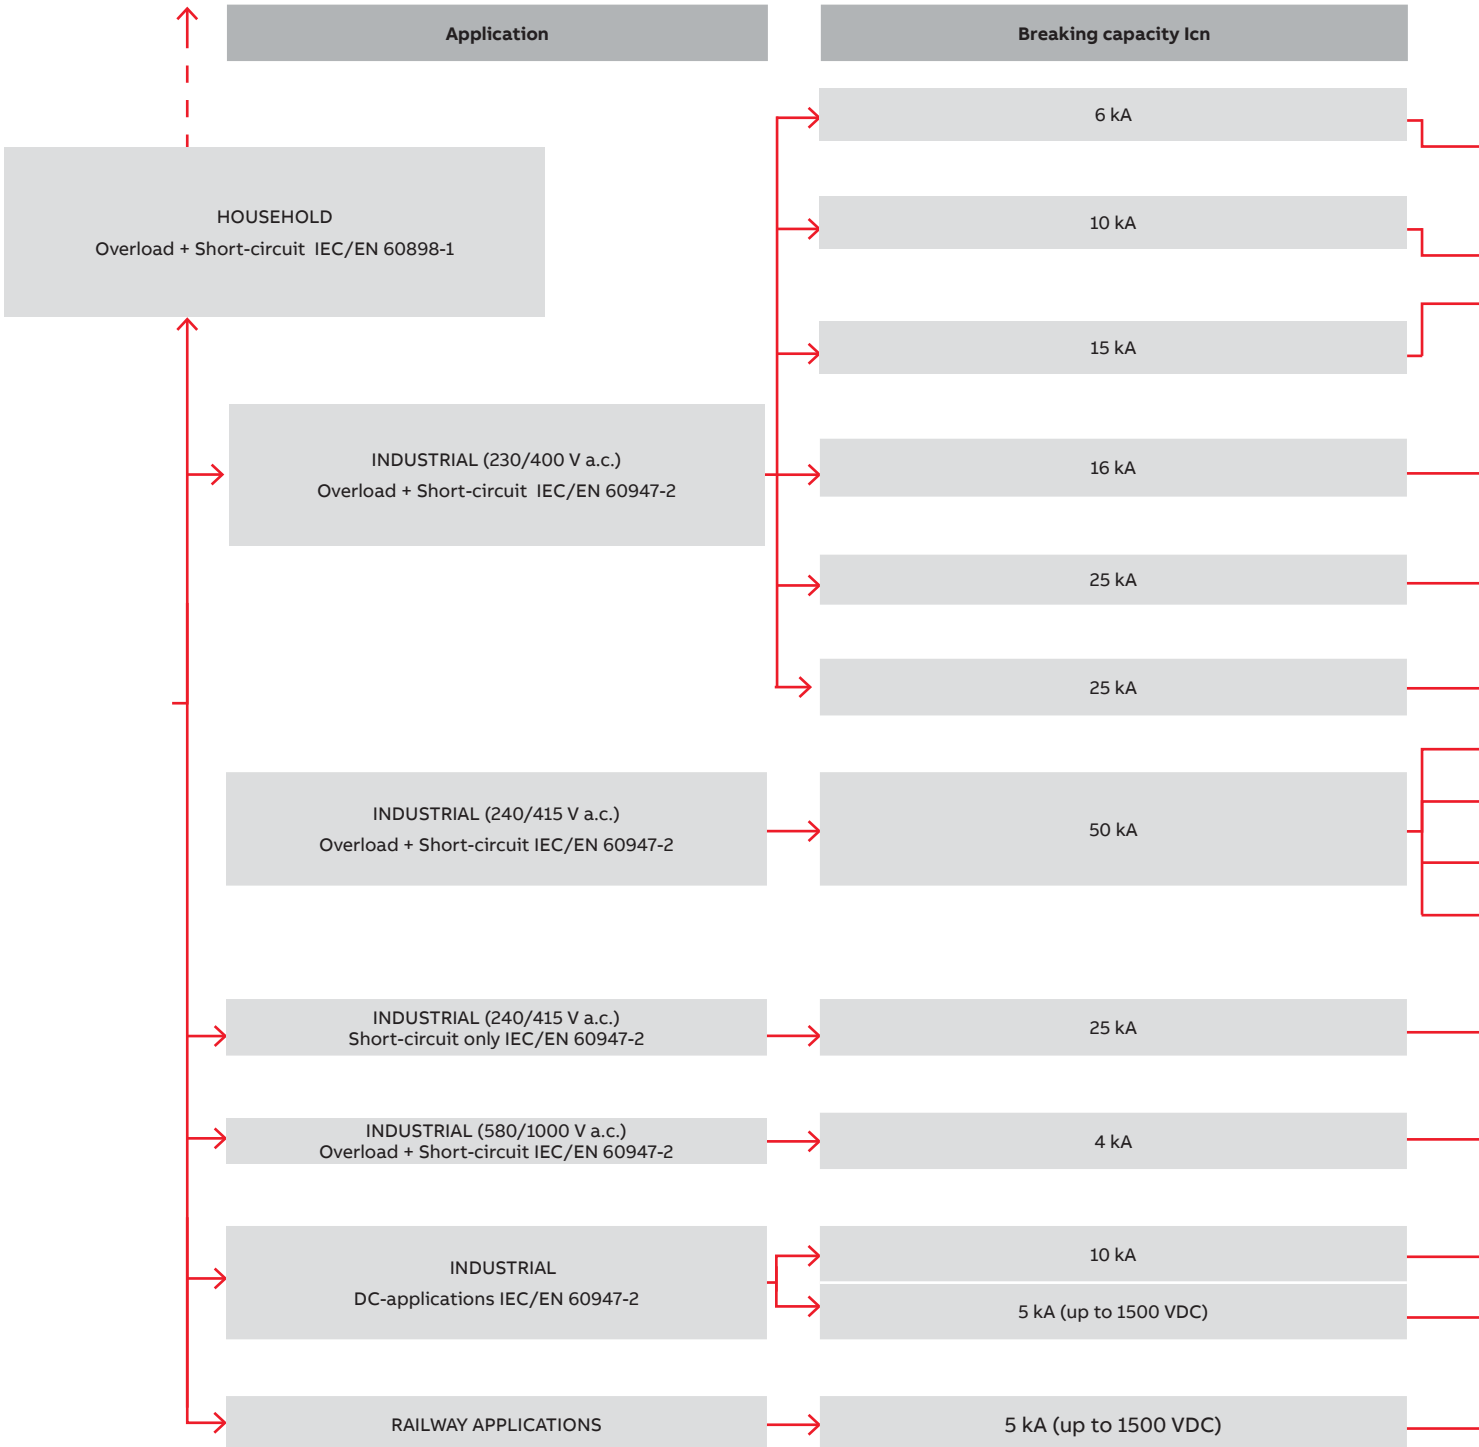

System pro M compact®

Quick selection of MCBs for household and industrial applications

Rated current	Poles	Solution
Up to 100 A	All poles	80-100A
Up to 63 A	All poles	S 200, S 200 M
Up to 40 A	All poles	S 200 M
Up to 63 A	All poles	S800B
Up to 100 A	All poles	S 750 DR
Up to 63 A	All poles	S 300P
Up to 63A	All poles	S800C
Up to 63A	All poles	S800N
Up to 80...125 A	All poles	S800P
Up to 63A	All poles	S800S
Up to 63A	1P, 2P, 3P, 4P	M 300P
Up to 125 A	1P, 2P, 3P	S800HV
Up to 63 A	1P, 2P, 3P, 4P	S 200 M UC
Up to 125 A	All poles	S800S-UC
Up to 125 A	All poles	S800-PV

System pro M compact®
Quick selection of MCBs for UL applications (UL 489/CSA 22.2 No. 5)

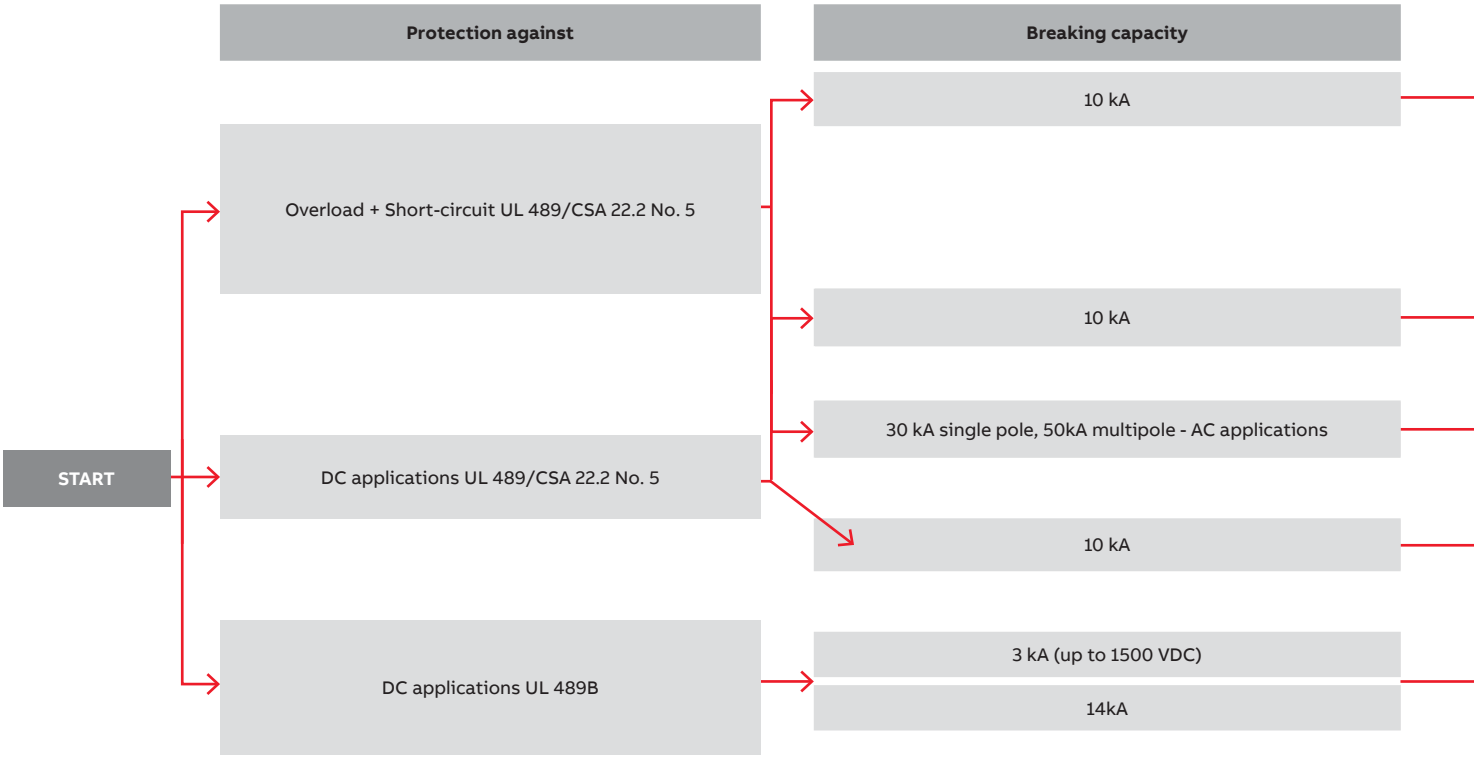

System pro M compact®

Quick selection of MCBs for UL applications (UL 489/CSA 22.2 No. 5)

Rated current	Wiring/Remark	Poles	Solution
Up to 63 A		1P, 2P, 3P, 4P	SU 200 M
Up to 63 A	Ring Tongue	1P, 2P, 3P, 4P	SU 200 MR
Up to 100 A	240 V AC	All poles	S 800 U
Up to 80 A	600 V DC	4P	S804U-UCZ
5 A		4P	S804U-PV
Up to 63A		1P, 2P	SU 200 DC

System pro M compact®

Quick selection of MCBs for rolling stock application IEC 60947-2 and UL1077

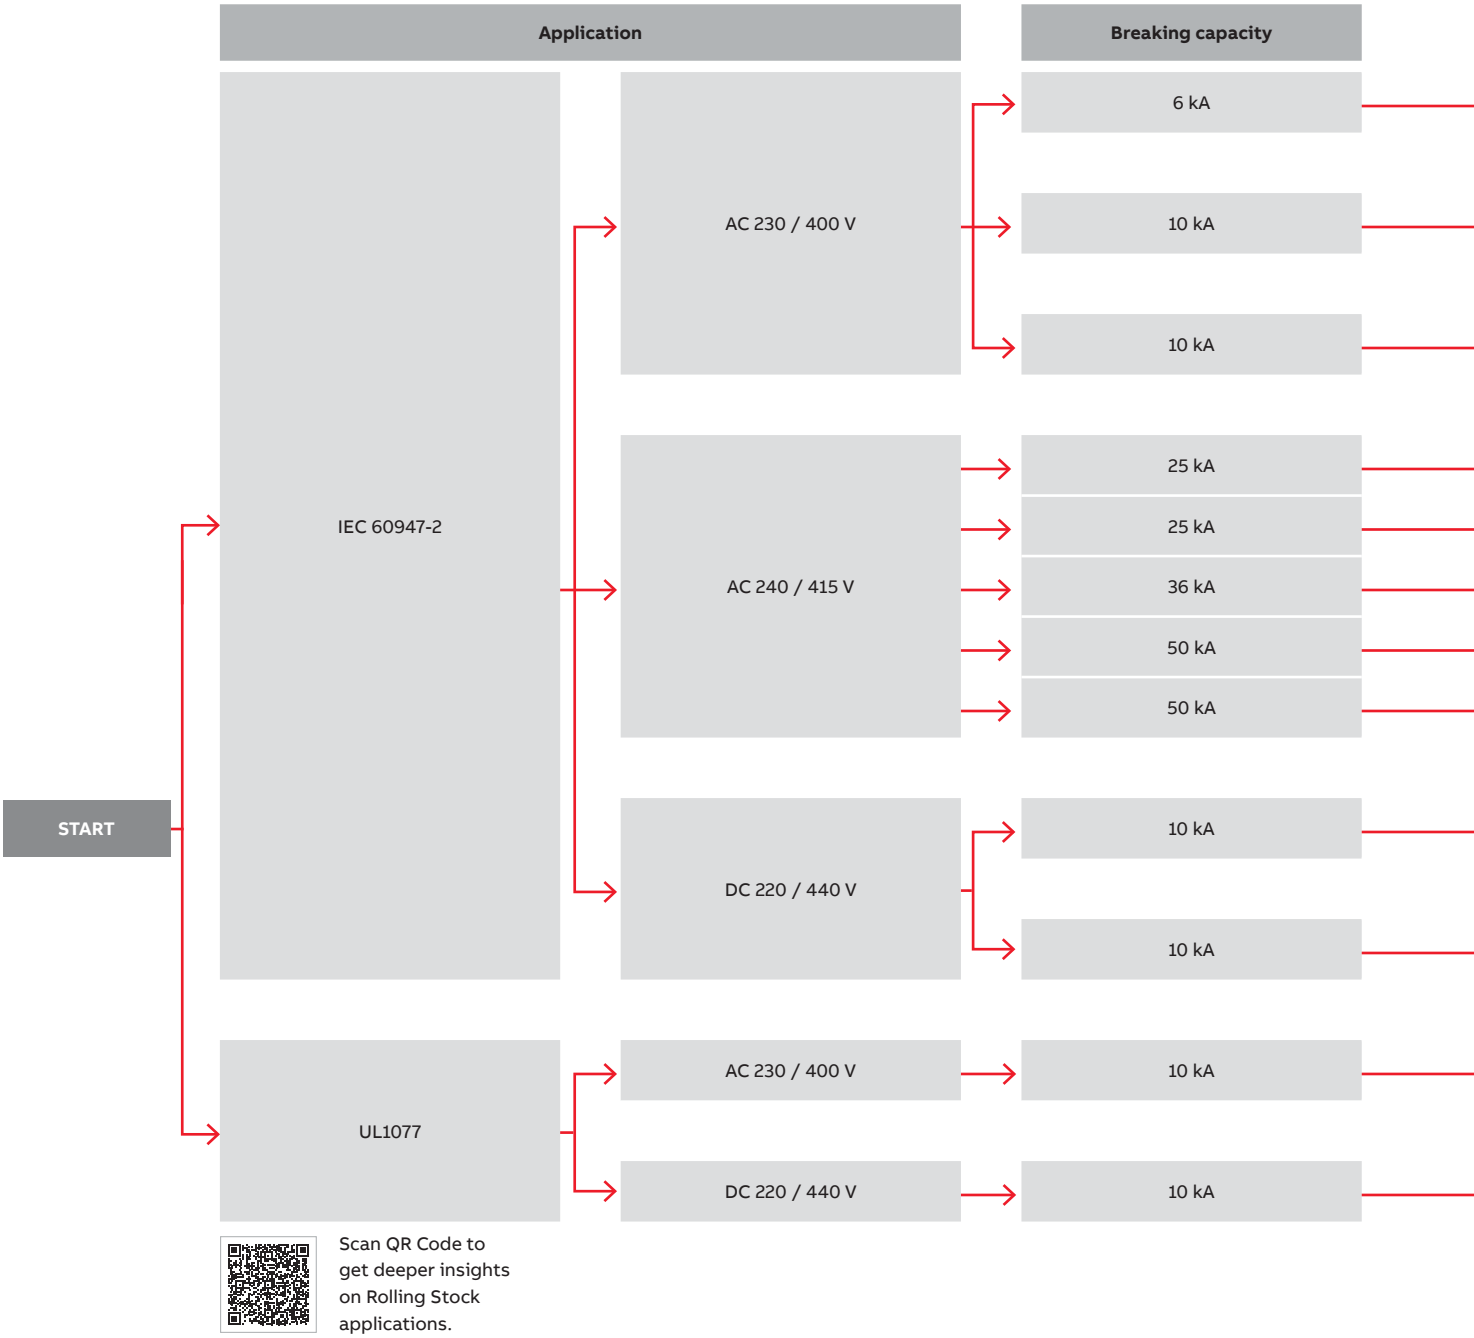

Scan QR Code to get deeper insights on Rolling Stock applications.

System pro M compact®

Quick selection of MCBs for rolling stock application IEC 60947-2 and UL1077

Rated current	Wiring/Remark	Poles	Solutions
Up to 32 A	Screw	All poles	S202TC
Up to 63 A	Screw	All poles	S200MT
Up to 63 A	Ring Tongue	All poles	S200MTR
Up to 63 A	Screw	All poles	S300P
up to 63 A	Screw / Ring Tongue	All poles	S800C
up to 63 A	Screw / Ring Tongue	All poles	S800N
up to 63 A	Screw / Ring Tongue	All poles	S800S
80...125 A	Screw / Ring Tongue	All poles	S800P
Up to 63 A	Screw	All poles	S200MTUC
Up to 63 A	Ring Tongue	All poles	S200MTR DC
Up to 63 A	Ring Tongue	All poles	ST200MTR
Up to 63 A	Ring Tongue	All poles	S200MTR DC

Miniature circuit-breakers

Selection table

Series				S 200	S 200 M	S 200 M UC	S 300 P				M 300 P				S 200 MR
Characteristics				B,C,D, K,Z	B,C,D, K,Z	B,C, K, Z	B,C,D, K,Z	B,C,D, K,Z	B,C,D, K,Z	B,C,D, K,Z	D	D	D	D	K
Rated current [A]				0.5 ≤ In ≤ 63	0.5 ≤ In ≤ 63	0.2 ≤ In ≤ 63	0.2 ≤ In ≤ 6	8 ≤ In ≤ 25	32 ≤ In ≤ 40	50 ≤ In ≤ 63	0.5 ≤ In ≤ 6	8 ≤ In ≤ 25	32 ≤ In ≤ 40	50 ≤ In ≤ 63	0.2 ≤ In ≤ 63
Reference standard		Nr. poles	Ue[V]												
IEC/EN 60898	Icn		230/400	6	10	10									
			240/415				25	25	20	15					
IEC/EN 60947-2 Alternating current	Icu	1, 1P+N	133	20***	25***										
			139				100	50	40	40	100	50	40	40	
			230	10***	15***										15
			240				100	25	25	25	100	25	25	25	
			253												
		2, 3, 4	230	20***	25***	10 *16/6 *17									
			240				100	50	40	40	100	50	40	40	
			400	10***	15***										15
			415				100	25	25	25	100	25	25	25	
			440	10***	15***	10 *16/6 *17	100	15	15	15	100	15	15	15	
		2, 3, 4	500												
			690												
	Ics	1, 1P+N	133	15***	18.7 *8***										
			139				100	20	20	20	100	20	20	20	
			230	7.5***	11.2 *8***										
			240				100	12.5	10	7.5	100	12.5	10	7.5	
			253			7.5 *16/6 *17									7.5*17/11.2*16
		2, 3, 4	230	15***	18.7 *8***										
			240				100	20	20	20	100	20	20	20	
			400	7.5***	11.2 *8***										
			415				100	12.5	10	7.5	100	12.5	10	7.5	
			440	7.5***	11.2 *8***	7.5 *16/6 *17	100	7.5	7.5	7.5	100	7.5	7.5	7.5	7.5*17/11.2*16
		2, 3, 4	500												
			690												
IEC/EN 60947-2 Direct current T=I/R≤5ms for all series, except S280 UC and S800S-UC, where T=I/R<15ms	Icu	1, 1P+N	24	20											
			60	10	10										
			72				25	25	25	25	25	25	25	25	
			125												
			220			10									
			250												
		2	48	20											
			110												
			125	10	10		25	25	25	25	25	25	25	25	
			250												
			440			10									
			500												
			800												
		3,4	375												
			500												
			750												
			1200												

*1 only up to 40 A; 10 kA up to 50/63 A
*2 only for "D" characteristic
*3 values are not for all rated currents
*4 600 V DC for 100, 125 A
*5 1000 V DC for 100, 125 A
*6 3 poles
*7 4 poles
*8 relevant product standard: E DIN VDE 0645 (based on IEC/EN 60898-1 and IEC/EN 60947-2)
*9 by 250 V DC 1-pole, 600 V 3- and 4-pole
*10 by 600 V DC 2-pole
*11 ≤ 25 A
*12 > 25 A
*13 char. B, C
*14 only 2 poles (connection in series)
*15 UL 1077 only
*16 ≤ 40 A
*17 > 40 A
*18 ≤ 35 A
*19 10-80 A
*** 50kA for 0.5-2A devices

Miniature circuit-breakers

Selection table

NEW

	SU 200 M			SU 200 MR	SU 200 DC	SN 201 L	S200CL	SN 201	S200C	SN 201 M	S200CM	S200 80-100A
C,Z	K	C,Z	K	K	K,Z	B,C	B,C	B,C,D	B,C	B,C	B,C	B,C
0.2 ≤ In ≤ 40	0.2 ≤ In ≤ 35	50 ≤ In ≤ 63	40 ≤ In ≤ 63	0.2 ≤ In ≤ 63	0.2 ≤ In ≤ 63	2 ≤ In ≤ 40	2 ≤ In ≤ 40	2 ≤ In ≤ 40	2 ≤ In ≤ 40	2 ≤ In ≤ 40	2 ≤ In ≤ 32	80 ≤ In ≤ 100
						4.5	4.5	6	6	10	10	6
												20
15	15	15	15	15								6
												20
15	15	15	15	15								6
												10
11.25	11.25	7.5	7.5									6
				7.5*17/11.2*16								
												10
11.25	11.25	7.5	7.5									6
				7.5*17/11.2*16								
15	15	10	10									6
												6
15	15	10	10									

Miniature circuit-breakers

Selection table

Series				S 200	S 200 M	S 200 M UC	S 300 P			M 300 P			S 200 MR
Characteristics				B,C,D, K,Z	B,C,D, K,Z	B,C, K, Z	B,C,D, K,Z	B,C,D, K,Z	B,C,D, K,Z	D	D	D	K
Rated current	[A]			0.5 ≤ In ≤ 63	0.5 ≤ In ≤ 63	0.2 ≤ In ≤ 63	0.2 ≤ In ≤ 25	32 ≤ In ≤ 40	50 ≤ In ≤ 63	0.5 ≤ In ≤ 25	32 ≤ In ≤ 40	50 ≤ In ≤ 63	0.2 ≤ In ≤ 63
IEC/EN 60947-2 Direct current T=I/R≤5ms for all series, except S280 UC and S800S-UC, where T=I/R<15ms	Ics	1, 1P+N	24	20									
			60	10	10								
			72				12.5	10	7.5	12.5	10	7.5	14
			125										
			220			10							
			250										
		2	48	20									
			110										
			125	10	10		12.5	10	7.5	12.5	10	7.5	
			250			25							
			440			10							
			500										
			800										
		3,4	375										
			500										
			750										
			1200										
UL 1077/ C22.2 No 235 Alternating current	Int. cap.	1, 1P+N	120	10 *15			10	10	10				
			240				10	10	10				
			277	6 *15	6	6	10	10	10				10
		2, 3, 4	240	10 *15			10	10	10				
			480 Y/277	6 *15	6	6	10	10	10				
UL 1077/ C22.2 No 235 Direct current	Int. cap.	1, 1P+N	60	10 *15	10		10	10	10				
			125										
			250			10							
		2, 3, 4	125		10		10	10	10				
			250										
			500			10							
UL 489/ C22.2 No 5 Alternating current	Int. cap.	1	240										
			277										
		2, 3, 4	240										
			480 Y/277										
UL 489/ C22.2 No 5 Direct current	Int. cap.	1	48										
			60										
			125										
		2	96										
			125										
			250										

*1 only up to 40 A; 10 kA up to 50/63 A
*2 only for "D" characteristic
*3 values are not for all rated currents
*4 600 V DC for 100, 125 A
*5 1000 V DC for 100, 125 A
*6 3 poles
*7 4 poles
*8 relevant product standard: E DIN VDE 0645 (based on IEC/EN 60898-1 and IEC/EN 60947-2)
*9 by 250 V DC 1-pole, 600 V 3- and 4-pole
*10 by 600 V DC 2-pole
*11 ≤ 25 A
*12 > 25 A
*13 char. B, C
*14 only 2 poles (connection in series)
*15 UL 1077 only
*16 ≤ 40 A
*17 > 40 A
*18 ≤ 35 A
*19 10-80 A

Miniature circuit-breakers

Selection table

NEW

			SU 200 M		SU 200 MR	SU 200 DC	SN 201 L	S200CL	SN 201	S200C	SN 201 M	S200CM	S200 80-100A
	C,Z	K	C,Z	K	K	K,Z	B,C	B,C	B,C,D	B,C	B,C	B,C	B,C
	0.2 ≤ In ≤ 40	0.2 ≤ In ≤ 35	50 ≤ In ≤ 63	40 ≤ In ≤ 63	0.2 ≤ In ≤ 63	0.2 ≤ In ≤ 63	2 ≤ In ≤ 40	2 ≤ In ≤ 40	2 ≤ In ≤ 40	2 ≤ In ≤ 40	2 ≤ In ≤ 40	2 ≤ In ≤ 32	80 ≤ In ≤ 100
	15	15	10	10									6
													6
	15	15	10	10									
			10	10	10								
	10	10			10 *18								
			10	10	10								
	10	10			10 *18								
	10	10	10	10									
						14							
	10	10	10	10									
						14							

Miniature circuit breakers

Selection table

Series				S 200 MT		S 200 MT UC		S202TC
Hazard level acc. EN45545-2				R 26/HL 3 R 22/HL 3	R 26/HL 3 R 22/HL 3	R 26/HL 3 R 22/HL 3	R 26/HL 3 R 22/HL 3	R 26/ HL 3 R22/HL3
V0 according EN 60695-11-10 and UL94				yes	yes	yes	yes	yes
NFPA-130								
Shock and vibration IEC 617373				Category 1 - Class A/B Body mounted	Category 1 - Class A/B Body mounted	Category 1 - Class A/B Body mounted	Category 1 - Class A/B Body mounted	Category 1 - Class B
Number of Poles				1P, 2P, 3P, 4P, 1P+N, 3P+N	1P, 2P, 3P, 4P, 1P+N, 3P+N	1P, 2P, 3P, 4P	1P, 2P, 3P, 4P	2P
Characteristics				B, C, D, K, Z	B, C, D, K, Z	B, C, K, Z	B, C, K, Z	B, C
Rated Currents (A)				0.2....40	50....63	0.2....40	50....63	2...32
Breaking Capacity	kA	Nr. Poles Ue (V)						
IEC / EN60898	Icu		240					
			415					
IEC / EN60947-2 Alternating current	Icu	1, 1+N	133	25	20			
			139					
			240					
		2, 3, 4	240					
			415					
			440					
		2, 3, 4, 3+N	230	25	20			
			400	15	10			
			440	15	10	10	6	
		1, 1+N	133	18,75	15			
			230	11,25	7,5			
			250			7,5	6	
		2, 3, 4, 3+N	230	18,75	15			
			400	11,25	7,5			
			440	11,25	7,5	7,5	6	
	Ics	1, 1P+N	139					
			240					
		2, 3, 4	240					
			415					
			440					
IEC / EN60947-2 direct current T=I/R≤5ms for all series except s280 UC and S800S-UC, where T=I/R<15ms	Icu	1, 1P+N	72					
			125					
IEC / EN60947-2 direct current T=I/R≤5ms	Icu	1, 1+N	110			20	20	
			220			10	10	
		2	220			25	25	
			440			10	10	
		3, 4	220			25	25	
			375			10	10	
			440			10	10	
	Ics	1, 1+N	60	10	10			
			110			10	10	
			220			10	10	
		2	125	10	10			
			220			20	20	
			250					
			440			10	10	
		3, 4	220			20	20	
			250					
			440			10	10	
UL 1077 Alternating current	I	1	120					
			240					
			277	6, U1		6, U1	6, U1	
		2, 3, 4	240					
			480Y / 277	6, U1		6, U1	6, U1	
UL 1077 direct current	I	1	48	10, U1				
			250			10, U1	10, U1	
Min. 2-poles connecting in series		2, 3, 4	96	10, U1				
Temperature Range			500			10, U1	10, U1	
				-40°C up to + 70°C	-40°C up to + 70°C	-40°C up to + 70°C	-40°C up to + 70°C	-40°C up to + 70°C

Miniature circuit breakers

Selection table

	S 300P				S 200 MTR		S 200 MTR DC	ST 200 MTR	ST 200 MTR DC
	R 26/HL 3 R 22/HL 3	R 26/HL 3 R 22/HL 3	R 26/HL 3 R 22/HL 3	R 26/HL 3 R 22/HL 3	R 26/HL 3 R 22/HL 3	R 26/HL 3 R 22/HL 3	R 26/HL 3 R 22/HL 3		
	yes	yes	yes	yes	yes	yes	yes	yes	yes
								yes	yes
	Category 1 - Class A/B Body mounted	Category 1 - Class A/B mounted	Category 1 - Class A/B Body mounted	Category 1 - Class A/B Body mounted	Category 1 - Class A/B Body mounted	Category 1 - Class A/B Body mounted	Category 1 - Class A/B Body mounted	Category 1 - Class A/B Body mounted	Category 1 - Class A/B Body mounted
	1P, 2P, 3P, 4P, 1P+N, 3P+N	1P, 2P, 3P, 4P, 1P+N, 3P+N	1P, 2P, 3P, 4P, 1P+N, 3P+N	1P, 2P, 3P, 4P, 1P+N, 3P+N	1P, 2P, 3P, 4P, 1P+N, 3P+N	1P, 2P, 3P, 4P, 1P+N, 3P+N	1P, 2P, 4P	1P, 2P, 3P, 4P	1P, 2P, 4P
	B, C, D, K, Z	B, C, D, K, Z	B, C, D, K, Z	B, C, D, K, Z	B, C, K, Z	B, C, K, Z	B, C, K, Z	K, Z	K, Z
	0.2....6	8....25	32....40	50....63	0.2....25	32....63	0.2....63	0.5....63	0.5....63
	25	25	20	15					
	25	25	20	15					
	100	50	40	40	25	25			
	100	50	40	40					
	100	25	25	25					
	100	50	40	40					
	100	25	25	25					
	100	15	15	15					
					25	25			
	100	25	25	25					
	100	15	15	15	25	15			
	100	20	20	20	12,5	12,5			
	100	12,5	10	7,5					
					12,5	7,5			
	100	20	20	20	12,5	12,5			
	100	12,5	10	7,5					
					12,5	7,5			
	100	20	20	20					
	100	12.5	10	7.5					
	100	20	20	20					
	100	12.5	10	7.5					
	100	7.5	7.5	7.5					
	25	25	25	25					
	25	25	25	25					
							20		
							10		
							20		
							10		
							20		
							10		
							10		
							20		
							20		
							10		
							20		
							10		
	10, U1	10, U1	10, U1	10, U1					
	10, U1	10, U1	10, U1	10, U1					
	10, U1	10, U1	10, U1	10, U1				6, U1	
	10, U1	10, U1	10, U1	10, U1					
	10, U1	10, U1	10, U1	10, U1				6, U1	
	10, U1	10, U1	10, U1	10, U1					
									10, U1
	10, U1	10, U1	10, U1	10, U1					
									10, U1
	-40°C up to + 70°C				-40°C up to + 70°C	-40°C up to + 70°C	-40°C up to + 70°C	-40°C up to + 70°C	-40°C up to + 70°C

High performance circuit-breakers

Selection table

Series				S 750 DR	S800P	S800S				S800N	S800C
Characteristics				E selective, K selective	B, C, D, K	B,C,D	K	KM	UCB	UCK	B,C,D	B,C,D,K
Rated current	[A]			16 ≤ In ≤ 100	80, 100, 125	0.5 ≤ In ≤63	0.5 ≤ In ≤63	20 ≤ In ≤ 80	0.5 ≤ In ≤ 125	0.5 ≤ In ≤ 125	6 ≤ In ≤ 63	10 ≤ In ≤ 63
Breaking capacity	[kA]											
Reference standard		Nr. poles	Ue[V]									
IEC/EN 60898	Icn		230/400		25◆● (80 A) 15◆● (100...125 A)	25					20	15
IEC/EN 60947-2 Alternating current	Icu	1	230	25								
			240		50	50	50				36	25
			254		30◆	30	30				20	15
			289		15◆ (80 A), 10◆ (100...125A)	15	15				10	
			400		6◆ (80 A), 4.5◆ (100...125A)	6	6				4.5	
			580									
		2, 3, 4	400	25								
			415		50	50	50	50 *6			36	25
			440		30◆	30	30	30 *6			20	15
			500		15◆ (80 A), 10◆ (100...125 A)	15	15				10	
			690		6◆ (80 A), 4.5◆ (100...125A)	6	6	6 *6			4.5	
			1000									
	Ics	1, 1P+N	230	12.5								
			240		40	40	40				30	25
			254			22.5	22.5	22.5			15	10
			289			11	11				8	
			400			4	4	4			3	
			580									
		2, 3, 4	400	12.5		40	40					
			415		40			40 *6			30	25
			440			22.5	22.5				15	10
			500			11	11				8	
			690			4	4	4			3	
			1000									

◆ Internal factory certificate only
● Characteristics B, C, D

*1 only up to 40 A; 10 kA up to 50/63 A
*2 only for "D" characteristic
*5 1500 V DC for 4P
*6 3 poles
*7 4 poles
*8 relevant product standard: E DIN VDE 0645 (based on IEC/EN 60898-1 and IEC/EN 60947-2)
*9 by 250 V DC 1-pole, 600 V 3- and 4-pole
*10 by 600 V DC 2-pole
*11 ≤ 25 A
*12 > 25 A
*13 char. B, C
*14 only 2 poles (connection in series)
*15 UL 1077 only
*16 ≤ 40 A
*17 > 40 A
*18 ≤ 35 A
*20 for S804U-UCZ only
*21 for S804U-PVS only

High performance circuit-breakers

Selection table

S800B	S800HV	S800U	S804U-UCZ	S804U-PVS	S800PV-SP
B, C, D, K	C, K	Z, K	UCZ	PVS	PV-SP
32 ≤ In ≤ 63	C: 10, 32 K: 0.5 ≤ In ≤ 125	10 ≤ In ≤ 100	10 ≤ In ≤ 80	5	5 ≤ In ≤ 125
10					
16					
		30			
	1.5 (0.5 … 5 A), 4 (6 … 63 A) 3 (80 … 125 A)				
16					
		50			
	1.5 (0.5 … 5 A) 4 (6 … 63 A) 3 (80 … 125 A)				
10					
		25			
	1.5 (0.5 … 5 A) 2.5 (6 … 63 A) 2 (80 … 125 A)				
10					
		40			
	1.5 (0.5 … 5 A) 2.5 (6 … 63 A) 2 (80 … 125 A)				

High performance circuit-breakers

Selection table

Series				S 750 DR	S800P	S800S					S800N	S800C
Characteristics				E selective, K selective	B, C, D, K	B,C,D	K	KM	UCB	UCK	B,C,D	B,C,D,K
Rated current	[A]			16 ≤ In ≤ 100	80, 100, 125	0.5 ≤ In ≤ 63	0.5 ≤ In ≤ 63	20 ≤ In ≤ 80	0.5 ≤ In ≤ 125	0.5 ≤ In ≤ 125	6 ≤ In ≤ 63	10 ≤ In ≤ 63
Breaking capacity	[kA]											
Reference standard		Nr. poles	Ue[V]									
IEC/EN 60947-2 Direct current T=I/R≤5ms for all series, except S280 UC and S800S-UC, where T=I/R<15ms	Icu	1	75									
			125		30◆	30	30				20	10
			250						50	50		
		2	150									
			250		30*	30	30				20	10
			500						50	50		
			800									
		3,4	225									
			300									
			375		30◆●[6]	30 *6	30 *6	30 *6			20 *6	10 *6
			500		30◆●[7]	30 *7	30 *7				20 *7	10 *7
			750						50 *6 50 (63...125 A)*7	50 *6 50 (63...125 A)*7		
			1000						50 (10...50 A)*7	50 (10...50 A)*7		
			1200									
			1500									

◆ Internal factory certificate only
● Characteristics B, C, D

*1 only up to 40 A; 10 kA up to 50/63 A
*2 only for "D" characteristic
*3 values are not for all rated currents
*6 3 poles
*7 4 poles
*8 relevant product standard: E DIN VDE 0645 (based on IEC/EN 60898-1 and IEC/EN 60947-2)
*9 by 250 V DC 1-pole, 600 V 3- and 4-pole
*10 by 600 V DC 2-pole
*11 ≤ 25 A
*12 > 25 A
*13 char. B, C
*14 only 2 poles (connection in series)
*15 UL 1077 only
*16 ≤ 40 A
*17 > 40 A
*18 ≤ 35 A
*19 10-80 A
*20 for S804U-UCZ only
*21 for S804U-PVS only

High performance circuit-breakers

Selection table

	S800B	S800HV	S800U	S804U-UCZ	S804U-PVS	S800PV-SP
	B, C, D, K	C, K	Z, K	UCZ	PVS	PV-SP
	32 ≤ In ≤ 63	C: 10, 32 K: 0.5 ≤ In ≤ 125	10 ≤ In ≤ 100	10 ≤ In ≤ 80	5	5 ≤ In ≤ 125
	10					
	10					
						5
	10 *6					
	10 *7					
						5 *6
						5 *7

High performance circuit-breakers

Selection table

Series				S 750 DR	S800P	S800S				S800N	S800C
Characteristics				E selective, K selective		B, C, D	K	KM	UCB	UCK	B, C, D	B, C, D, K
Rated current	[A]			16 ≤ In ≤ 100		0.5 ≤ In ≤ 63	0.5 ≤ In ≤ 63	20 ≤ In ≤ 80	0.5 ≤ In ≤ 125	0.5 ≤ In ≤ 125	6 ≤ In ≤ 63	10 ≤ In ≤ 63
UL 1077/ C22.2 No 235 Alternating current	Int. cap.	1	240			30	30					20
			277			14	14					
			347			6	6					10
		2, 3, 4	240			30	30					
			480 Y/277			14	14					
			600Y/347			6	6					
UL 1077/ C22.2 No 235 Direct current	Int. cap.	1	125									10
			250									
		2, 3, 4	125									
			250									10 (2P)
			375									10 (3P)
			500									10 (4P)
UL 489/ C22.2 No 5 Alternating current	Int. cap.	1	240									
			277									
		2, 3, 4	240									
			480 Y/277									
UL 489/ C22.2 No 5 Direct current	Int. cap.	1	60									
		2	125									
		4	600									
UL489B Direct current		4	1000									

*1 only up to 40 A; 10 kA up to 50/63 A
*2 only for "D" characteristic
*3 values are not for all rated currents
*5 1500 V DC for 4P
*6 3 poles
*7 4 poles
*8 relevant product standard: E DIN VDE 0645 (based on IEC/EN 60898-1 and IEC/EN 60947-2)
*9 by 250 V DC 1-pole, 600 V 3- and 4-pole
*10 by 600 V DC 2-pole
*11 ≤ 25 A
*12 > 25 A
*14 only 2 poles (connection in series)
*15 UL 1077 only
*16 ≤ 40 A
*17 > 40 A
*18 ≤ 35 A

High performance circuit-breakers

Selection table

	S800B	S800HV	S800U	S804U-UCZ	S804U-PVS	S800PV-SP
	B, C, D, K	C, K	Z, K	UCZ	PVS	PV-SP
	32 ≤ In ≤ 63	C: 10, 32 K: 6 ≤ In ≤ 125	10 ≤ In ≤ 100	10 ≤ In ≤ 80	5	5 ≤ In ≤ 125
		15 (3P, 10 ... 32 A) *26				
			30			
			50			
				10		
					3	

*19 10-80 A
*22 by 75V DC 1-pole
*23 by 150V DC 2-pole
*24 by 225V DC 3-pole
*25 by 300V DC 4-pole
*26 3P, 10 ... 32 A - only valid with XT2L 125 TMF 35-400

MCB S 300. The next generation of line protection

The new dimension in efficiency and power

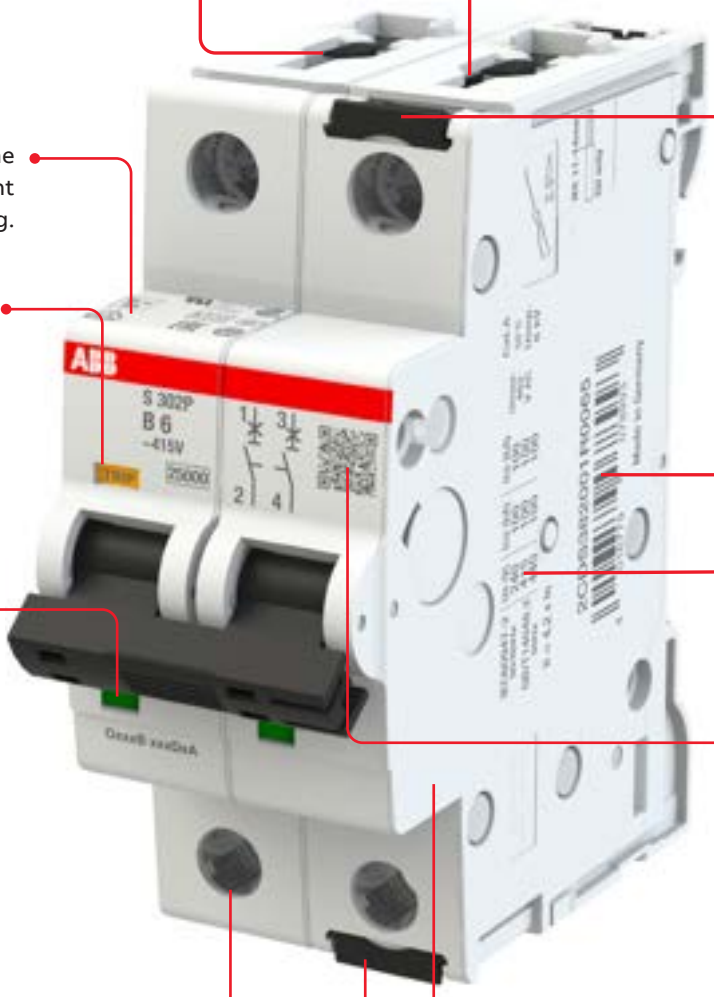

IP20 - finger safety.

Twin terminal for separate feeding of busbar and conductor.

Dual DIN-Rail release for easy mounting even whith busbars attached.

Easy identification of the product and highl resistant laser marking.

Quick identification thanks to laser printed EAN marking.

Trip indicator for easy trip identification on site.

Contact position indication: visualization of the contact position, independent from the toggle position.

Save your time – all important data available right away.

QR-Code for direct internet access to all Product data/ files.

Captive screws: don't loose what's important for you.

Whatever your application need is applicable with a wide range of accessories.

Dual DIN-Rail release for easy mounting.

Contact position indication
All System pro M compact® MCBs are suited with a contact position indication (CPI) on the toggle. You can easily identify, if the MCB is in the ON or the OFF position – easy and safe maintenance work is possible.
The green/red window indicates the real position of the contacts independently of the toggle position.

Approvals printed on the dome
S 300 MCBs comply to IEC/EN 60898-1 and IEC/EN 60947-2 and carry all relevant approval marks for each market and segment they are destined to. The certification markings are also printed on the dome of the MCB. Thus make it possible to see the markings also in the mounted position. For control and acceptance procedure – certification marks visible on fitted devices on the dome.

Housing material
By using the state-of-the-art housing material, ABB is taking care of the environment. With the latest generation of thermoplastics it's possible to recycle the MCBs – especially the thermoplastic housing-material can be re-used. By using the latest generation of thermoplastics the material stability of all System pro M compact® MCBs is improved. S 300 MCBs are 100% free of halogens – no environmental pollution.

Laser printing
All printings of the S 300 MCBs, like the approvals on the dome and the product identification, are printed by a laser. The laser printing ensures a friction, scratch and solvent resistant marking on the MCBs. Easy identification of the products in case of maintenance or replacements due to safe laser printing.

IP 20 - finger safe terminals
The System pro M compact® MCB's are equiped with 35 mm² + 10 mm² cylinder lift twin terminals, a well proven and reliable technology - designed for sopisticated industrial use. The cross wiring can easily be done by inserting the System pro M compact® busbars into the rear terminal part and then the incoming wires into the front part of the terminal.

Trip indicator
The trip indicator will signalize tripping events of the MCB directly on site.
So you can directly identify if the MCB was tripped by e.g. short circuit, overload, shunt trip, etc. or switched Off manually.

QR-Code
The QR-Code will give you direct access to all product related data, certificates and documents.

Dual DIN-Rail Release
With the new Dual DIN-Rail Release the toolless installation and uninstallation will be much faster and easier, even with already attached busbars.

Improved performance
The new level of strong electrical performance ensures high breaking capacity of 25kA and improved energy efficency for all kinds of high performance applictions.

MCB S 200. The details make the difference

A range designed to ensure efficiency and protection

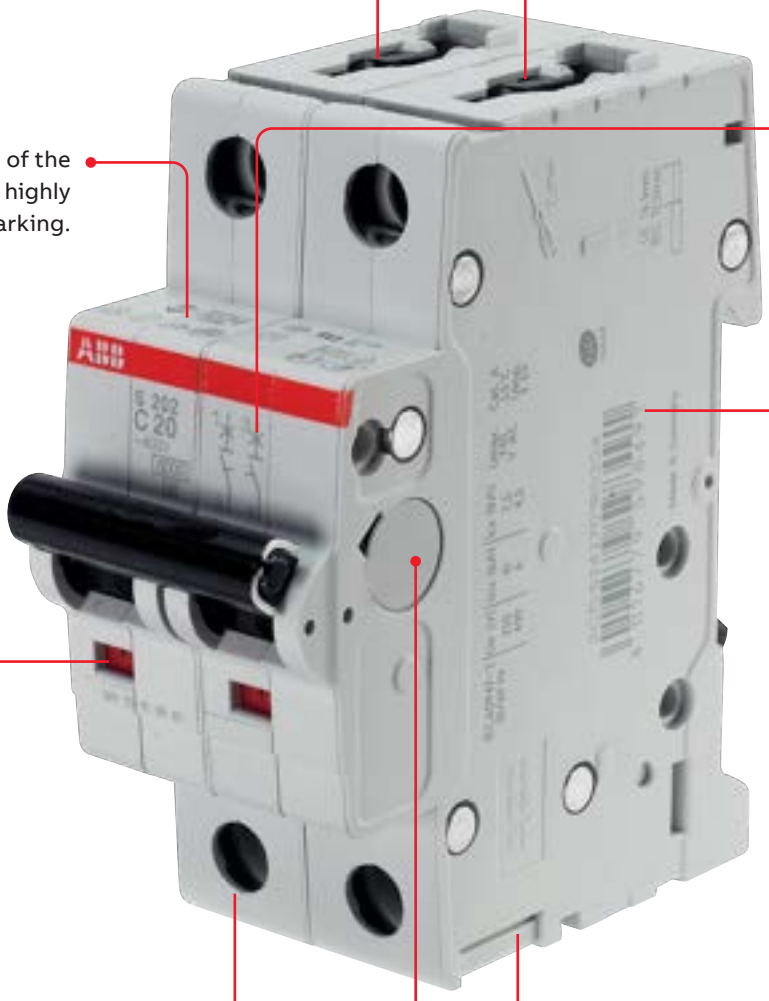

IP20 - finger safety.

Twin terminal for separate feeding of busbar and conductor.

Save your time – all important data available right away.

Easy identification of the product and highly resistant laser marking.

Quick identification thanks to laser printed EAN marking.

Contact position indication: visualization of the contact position, independent from the toggle position.

Captive screws: don't loose what's important for you.

Whatever your application need is applicable with a wide range of accessories.

Contact position indication
All System pro M compact® MCBs are suited with a contact position indication (CPI) on the toggle. You can easily identify, if the MCB is in the ON or the OFF position – easy and safe maintenance work is possible.
The green/red window indicates the real position of the contacts independently of the toggle position.

Approvals printed on the dome
S 200 MCBs comply to IEC/EN 60898-1 and IEC/EN 60947-2 and carry all relevant approval marks for each market and segment they are destined to. The certification markings are also printed on the dome of the MCB. Thus make it possible to see the markings also in the mounted position. For control and acceptance procedure – certification marks visible on fitted devices on the dome.

Housing material
By using the state-of-the-art housing material, ABB is taking care of the environment. With the latest generation of thermoplastics it's possible to recycle the MCBs – especially the thermoplastic housing-material can be re-used. By using the latest generation of thermoplastics the material stability of all System pro M compact® MCBs is improved. S200 are 100% free of halogens – no environmental pollution.

Laser printing
All printings of the S 200 and S 200 M MCBs, like the approvals on the dome and the product identification, are printed by a laser. The laser printing ensures a friction, scratch and solvent resistant marking on the MCBs.
Easy identification of the products in case of maintenance or replacements due to safe laser printing.

IP 20 - finger safe terminals
The System pro M compact® MCB's are equiped with 35 mm² + 10 mm² cylinder lift twin terminals, a well proven and reliable technology - designed for sopisticated industrial use.
The cross wiring can easily be done by inserting the System pro M compact® busbars into the rear terminal part and then the incoming wires into the front part of the terminal.

MCB S 200 MT and S 200 MT UC. The details make the difference

A range designed for rolling stock equipments

Twin terminal for separate feeding of busbar and conductor.

IP20 - finger safety.

Easy product name, easy identification, easy life.

Captive screws: don't loose what's important for you.

Wide range of accessories are available for rolling stock and rail infrastructure applications.

Dedicated materials for rolling stock
In the S200 range of MCBs for traction, specific materials are used that are classified with an hazard level R26/HL3 according to EN 45545-2.

Shock and vibration resistance
Shock and vibration resistance Additionally to the high-quality standards and the flammability requirements, rail applications have specific demands that have to be to fulfilled like resistance to shocks and vibrations. The resistance to vibrations and shocks of MCBs S 200 has been positively tested according to:
IEC 61373 Rolling stock equipment – Shock and vibration tests considering Category 1, Class B.

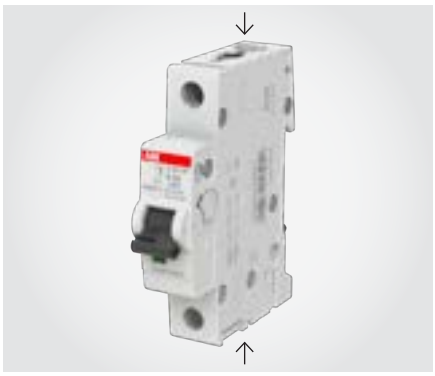

Open to all sides
All devices can be supplied from top or bottom either with cables or busbars. Can be mounted flexibly in all positions.

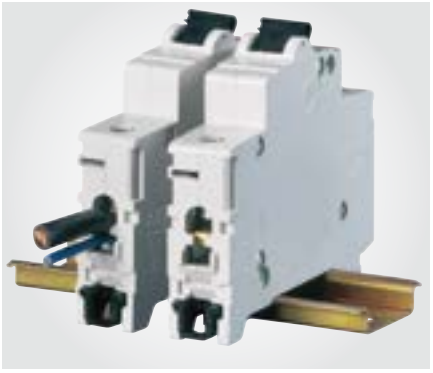

High-quality terminal system
The integrated captive terminals and cable connection screws facilitate every electrician's life. ABB guarantees highest safety standards. The certification according to EN 41140 stands for protection against electric shock. And the certification according to the DIN EN 50 274 stands for terminals that are safe from touch by the back of the hand and the finger (IPXXB or IP20). The high safety standards become clear through the integrated and failsafe cable connecting terminals.

Contact position indication
All System pro *M* compact® MCBs are suited with a contact position indication (CPI) on the toggle. You can easily identify if the MCB is in the ON or the OFF position – easy and safe maintenance work is possible.

Advanced features
Auxiliary switches S2C-H10 (1 NO) and S2C-H01 (1 NC) and all S2C accessories can be retrofitted. They can be mounted individually and without modification of the existing busbar. At the same time, the supply of the MCB remains unaffected.

MCBs

S 200 / S 300 / M300P technical features

S 200

S 300

M300

			S 200	S 200 M
General Data	Standards		IEC/EN 60898-1, IEC/EN 60947-2	IEC/EN 60898-1, IEC/EN 60947-2
			UL 1077	UL 1077, CSA 22.2 No. 235
	Poles		1P, 2P, 3P, 4P, 1P+N, 3P+N	
	Tripping characteristics		B, C, D, K, Z	
	Rated current I_n	A	0.5…63 A	
	Rated frequency f	Hz	50 / 60 Hz	
	Rated insulation voltage U_i acc. to IEC/EN 60664-1	V	440 V AC (phase to phase)	
	Overvoltage category		III	
	Pollution degree		3	
Data acc. to IEC/EN 60898-1 (except S 200 M UC data acc. to IEC/EN 60898-2)	Rated operational voltage U_n	V	1P: 230/400 V AC; 1P+N: 230 V AC ; 2...4P: 400 V AC; 3P+N: 400 V AC	
	Max. power frequency recovery voltage (U_{max})	V	1P: 253 V AC; 1P+N: 253 V AC; 2P: 440 V AC; 3...4P: 440 V AC; 3P+N: 440 V AC; 1P: 72 V DC; 2P: 125 V DC	
	Min. operating voltage	V	12 V AC - 12 V DC	
	Rated short-circuit capacity I_{cn}	kA	6 kA	10 kA
	Energy limiting class (B, C)		3	
	Grid distance	mm	35	35
	Rated impulse withstand voltage Uimp. (1.2/50µs)	kV	4 kV (test voltage 6.2 kV at sea level, 5 kV at 2,000 m)	
	Dielectric test voltage	kV	2 kV (50 / 60Hz, 1 min.)	
	Reference temperature for tripping characteristics	°C	B, C, D: 30°C	
	Electrical endurance	cycles (OFF-ON-OFF)	In < 32A: 20,000 ops (AC), In ≥ 32A: 10,000 ops. (AC); 1,000 ops. (DC); (1 cycle 2s - ON, 13s - OFF, In ≤ 32A), (1 cycle 2s - ON, 28s - OFF, In > 32A)	

Note:
* Only acc. to IEC/EN 60898-1

MCBs

S 200 / S 300 / M300P technical features

S 200 M UC	S 300 P	M 300 P	S 200 MR	SU 200 M	SU 200 MR	SU 200 DC
IEC/EN 60898-2, IEC/EN 60947-2	IEC/EN 60898-1, IEC/EN 60947-2	IEC/EN 60947-2	IEC/EN 60947-2	IEC/EN 60947-2	IEC/EN 60947-2	
UL 1077, CSA 22.2 No. 235	UL 1077, CSA 22.2 No. 235		UL 1077, CSA 22.2 No. 235	UL 489, CSA22.2 No.5	UL 489, CSA22.2 No.5	UL 489
1P, 2P, 3P, 4P	1P, 2P, 3P, 4P, 1+N, 3+N	1P, 2P, 3P, 4P	1P, 2P, 3P, 4P	1P, 2P, 3P, 4P	1P, 2P, 3P, 4P	1P, 2P
B, C, K, Z	B, C, D, K, Z	D (magnetic only)	K	C, K, Z	K	
0 / 50 / 60 Hz		0.5...63 A		0.2…63 A 0.2…25 A	0.2…63 A	0.2...63A
0 / 50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz			DC
440 V AC (phase to phase)	500 V AC	500 V AC	440 V AC (phase to phase)	440 V AC (phase to phase)	440 V AC (phase to phase)	
	IV	IV				--
3						--
1P: 230 V AC, 220 V DC 2P: 400 V AC, 440 V DC 3...4P: 400 V AC*	1P: 1+N: 240 V AC, 72 V DC 2P: 415 V AC, 125 V DC 3...4P: 3+N 415 V AC			--		
1P: 253 V AC, 250 V DC 2P: 440 V AC, 500 V DC 3...4P: 440 V AC*	1P: 1+N: 264 V AC, 72 V DC 3...4P: 3+N: 462 V AC 125 V DC			--		
				--		
10 kA	≤ 25 A: 25 kA ≤ 32-40 A: 20 kA > 40 A: 15 kA			--		
				--		
35	In < 25A: 75 In > 25A: 90	In < 25A: 75 In > 25A: 90	--	--		
	6 kV	6 kV	4 kV (test voltage 6.2 kV at sea level, 5 kV at 2,000 m)	--		
				--		
30 °C				--		
				--		

MCBs

S 200 / S 300 / M300P technical features

S 200

S 300

M300

			S 200	S 200 M
Data acc. to IEC/EN 60947-2	Rated operational voltage U_e	V	1P: 230 V AC; 1P+N: 230 V AC; 2...4P: 440 V AC; 3P+N: 440 V AC	
	Max. power frequency recovery voltage (U_{max})	V	1P: 253 V AC; 1P+N: 253 V AC; 2P...4P: 462 V AC; 3P+N: 462 V AC; 1P: 72 V DC; 2P: 125 V DC	
	Min. operating voltage	V	12 V AC - 12 V DC	
	Rated ultimate short-circuit breaking capacity I_{cu}	kA	<= 2 A: 50 kA >2 A: 10 kA	<= 2 A: 50 kA >2 A: 10 kA
	Rated service short-circuit breaking capacity I_{cs}	kA	7.5 kA	≤ 40 A: 11.2 kA 50, 63 A: 7.5 kA
	Rated impulse withstand voltage Uimp. (1.2/50µs)	kV	4 kV (test voltage 6.2 kV at sea level, 5 kV at 2,000 m)	
	Dielectric test voltage	kV	2 kV (50 / 60Hz, 1 min.)	
	Reference temperature for tripping characteristics	°C	B, C, D: 55°C; K, Z: 20°C	
	Electrical endurance	cycles (OFF-ON-OFF)	In < 32A: 20,000 ops (AC), In ≥ 32A: 10,000 ops. (AC); 1,000 ops. (DC); (1 cycle 2s - ON, 13s - OFF, In ≤ 32A), (1 cyle 2s - ON, 28s - OFF, In > 32A)	

MCBs

S 200 / S 300 / M300P technical features

S 200 M UC	S 300 P	M 300 P	S 200 MR	SU 200 M	SU 200 MR	SU 200 DC
1P: 253 V AC, 220 V DC 2...4P: 440 V AC, 440 V DC	1P: 240 V AC; 1P+N: 240 V AC; 2...4P: 415 V AC; 3P+N: 415 V AC	1P: 240 V AC; 2...4P: 415 V AC;	1P: 230 V AC 2...4P: 400 V AC	1P: 230 V AC 2...4P: 400 V AC	1P: 230 V AC 2...4P: 400 V AC	--
1P: 266 V AC, 250 V DC 2...4P: 462 V AC, 500 V DC	1P: 264 V AC; 1P+N: 264 V AC; 2P...4P: 462 V AC; 3P+N: 462 V AC; 1P: 72 V DC; 2P: 125 V DC	1P: 264 V AC; 2P...4P: 462 V AC; 1P: 72 V DC; 2P: 125 V DC	1P: 253 V AC 2...4P: 440 V AC	1P: 253/440 V AC; 2...4P: 440 V AC	1P: 253 V AC 2...4P: 440 V AC	--
			12 V AC	12 V AC		12 V DC
≤ 40 A: 10 kA AC; 10 kA DC > 40 A: 6 kA AC; 10 kA DC	≤ 6 A: 100 kA 25kA	≤ 6 A: 100 kA 25kA	15 kA	10 kA	15 kA	--
≤ 40 A: 7,5 kA AC; 10 kA DC > 40 A: 6 kA(AC; 10 kA DC	≤ 6 A: 100 kA ≤ 25 A: 12.5 kA ≤ 32…40 A: 10 kA > 40 A: 7.5 kA	≤ 6 A: 100 kA ≤ 25 A: 12.5 kA ≤ 32…40 A: 10 kA > 40 A: 7.5 kA	≤ 40 A: 11.2 kA; > 40 A: 7.5 kA AC;	7.5 kA	≤ 40 A: 11.2 kA; > 40 A: 7.5 kA (AC);	--
	6 kV	6 kV	4 kV (test voltage 6.2 kV at sea level, 5 kV at 2,000 m)			--
						--
B, C: 55 °C; K, Z: 20 °C	B,C,D: 55°C; K,Z: 40°C	D: 55°C	20 °C	C, K, Z: 30°C	20 °C	--
In < 32A: 20,000 ops (AC), In ≥ 32A: 10,000 ops. (AC); 1,500 ops. (DC);	In < 32A: 20,000 ops (AC), In ≥ 32A: 10,000 ops (AC); 1,500 ops (DC); (1 cycle 2s - ON, 13s - OFF, In ≤ 32A), (1 cyle 2s - ON, 28s - OFF, In ≥ 32A)	In < 32A: 20,000 ops (AC), In ≥ 32A: 10,000 ops (AC); 1,500 ops (DC); (1 cycle 2s - ON, 13s - OFF, In ≤ 32A), (1 cyle 2s - ON, 28s - OFF, In ≥ 32A)	In < 25A: 20,000 ops (AC), In ≥ 25A: 10,000 ops. (AC);		In < 25A: 20,000 ops (AC), In ≥ 25A: 10,000 ops. (AC);	--

MCBs

S 200 / S 300 / M300P technical features

S 200

S 300

M300

			S 200	S 200 M
Data acc. to UL / CSA	Rated voltage	V	480Y / 277 V AC;	480Y / 277 V AC;
			1P: 60 V DC; 2P…4P: 110 V DC	1P: 60 V DC; 2P…4P: 125 V DC
	Rated interrupting capacity acc. to UL 1077	kA	6 kA AC; 10 kA DC	
	Short-circuit current rating acc. to UL 489		--	
	Application		Suppl. prot. for general use. Application Codes: TC2, OL0, SC: U1	
	Reference temperature for tripping characte-ristics	°C	B, C, D, K, Z: 25°C	
	Electrical endurance	ops.	6,000 ops (AC), 6,000 ops. (DC); 1 cycle (1s - ON, 9s - OFF)	
Mechani-cal Data	Housing		Insulation group II, RAL 7035 fire exposure V2 acc.to UL94	fire exposure V0 acc.to UL94
	Toggle		Insulation group II, black, sealable	
	Contact position indication		Marking on toggle (I ON / 0 OFF), Real CPI (red ON / green OFF)	
	Protection degree acc. to EN 60529		IP20*, IP40 in enclosure with cover	
	Mechanical endurance	cycles (OFF-ON-OFF)	20,000 ops.	
	Shock resistance acc. to IEC/EN 60068-2-27		25 g - 2 shocks - 13 ms	
	Vibration resistance acc. to IEC/EN 60068-2-6		5g - 20 cycles at 5…150…5 Hz with load 0.8In	
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/ RH	28 cycles with 55°C/90-96% and 25°C/95-100%	
	Ambient temperature	°C	-25 … +55°C	
	Storage temperature	°C	-40 … +70°C***	

Note:
* Also fulfilling the requirement acc. to the protection degree IPXXB
** Only with accessory: IP20 terminal clip
*** Up to +70°C if the average temperature over a period of 24h is not exceeding 55°C.

MCBs

S 200 / S 300 / M300P technical features

S 200 M UC	S 300 P	M 300 P	S 200 MR	SU 200 M		SU 200 MR	SU 200 DC
480Y / 277 V AC	480Y / 277 V AC		480Y / 277 V AC	240 V AC	480 Y / 277 V AC	1P: ≤ 35 A: 277 V AC; > 35 A: 240 V AC 2...4P: ≤ 35 A: 480 / 277 V AC; > 35 A: 240 V AC	
1P: 250 V DC 2...4P: 500 V DC	1P: 60 V DC 2...4P: 125 V DC		480 / 277 V AC				1P: 125 V DC 2P: 250 V DC
	10 kA		10 kA	--			
				10 kA		10 kA	14 kA (UL)
TC1, 0L0, SC: U1	TC2, OL0, SC: U1		Ring tongue terminal, not for general use			Ring tongue terminal, not for general use	--
	40 °C		25 °C	C, K, Z: 40 °C		25 °C	K, Z: 40°C
						6,000 ops. (1 cycle 1s - ON, 9s - OFF)	
Insulation group I, RAL 7035 fire exposure V0 acc.to UL94				Insulation group II, RAL 7035 fire exposure V2 acc.to UL94		Insulation group I, RAL 7035 fire exposure V0 acc.to UL94	
				IP20**, IP40 in enclosure with cover			
	25 g - 2 shocks - 13 ms	25 g - 2 shocks - 13 ms	25 g - 2 shocks - 13 ms	25 g - 2 shocks - 13 ms		25 g - 2 shocks - 13 ms	
-25 ... +55°C	-40 ... +70°C	-40 ... +70°C	-25 ... +55°C	-25 ... +55°C		-25 ... +55°C	-25 ... +55°C
-40 ... +70°C	-50 ... +70°C	-50 ... +70°C	-40 ... +70°C	-40 ... +70°C		-40 ... +70°C	-40 ... +70°C

MCBs

S 200 / S 300 / M300P technical features

S 200

S 300

M300

				S 200	S 200 M
Installation	Terminal			Failsafe bi-directional cylinder-lift terminal	
	Cross-section of conductors *1 (top / bottom)	Solid / Stranded	mm²	35 mm² / 35 mm²	
		Flexible	mm²	25 mm² / 25 mm²	
			AWG	18 - 4 AWG	14 - 4 AWG
	Cross-section of busbars (top / bottom)		mm²	10 mm² / 10 mm²	
			AWG	18 - 8 AWG	14 - 8 AWG
	Tightening Torque *2		Nm	2.8 Nm	
			in-lbs.	18 in-lbs.	
	Screwdriver			No. 2 Pozidrive	
	Mounting			On DIN rail 35 mm acc. to EN 60715 by fast clip	
	Mounting position			any	
	Supply			optional	
Dimensions and weight	Mounting dimensions acc. to DIN 43880			Mounting dimension 1	
	Pole dimensions (H x D x W)		mm	88 x 69 x 17.5 mm	
	Pole weight		g	approx. 125 g	
Combination with aux. elements	Auxiliary contact			Yes	Yes
	Signal contact			Yes	Yes
	Shunt trip			Yes	Yes
	Undervoltage release			Yes	Yes
	Motor Operating Device			Yes	Yes
	Integrated auxiliary switch			Yes	Yes

*1 All approvals according to the product standards are carried out with copper conductors.
For more details on cable type and cable cross-section, please refer to our technical catalogue (MCB, part B).
*2 Nm-values acc. IEC / in-lbs.-values acc. UL
*3 1 ... 4 mm² (rigid or flexible wires without end sleeves); 1 ... 2.5 mm² (flexible wires with end sleeves)

MCBs

S 200 / S 300 / M300P technical features

S 200 M UC	S 300 P	M 300 P	S 200 MR	SU 200 M		SU 200 MR	SU 200 DC
			Ring Tongue Terminal			Ring Tongue Terminal	Failsafe bi-directional cylinder-lift terminal
	35 mm² / 35 mm²	35 mm² / 35 mm²	25 mm² / 25 mm²	35mm2/35mm2			
	25 mm² / 25 mm²	25 mm² / 25 mm²	25 mm² / 25 mm²	35mm2/35mm2			
	18 - 8 AWG	18 - 8 AWG	18 - 4 AWG			18 - 4 AWG	
	18 - 8 AWG	18 - 4 AWG	18 - 8 AWG				
	18 in-lbs.	18 in-lbs.	25 in-lbs.				
Please note polarity of device	optional	optional		optional		top or bottom	Please note polarity of device
				--		Mounting dimension 1	
85 x 69 x 17.5 mm	88 x 69 x 17.5 mm	88 x 69 x 17.5 mm	100 x 69 x 17.5 mm	92 x 71 x 17.5 mm	100 x 71 x 17.5 mm	115 x 69 x 17.5 mm	92 x 71 x 17.5 mm
approx. 125 g	approx.124 g	approx.124 g	approx. 125 g	approx. 140g	approx. 140g	approx. 125 g	
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	No	No	No	No
Yes	Yes	Yes	No	Yes	No	No	No
Yes	Yes	Yes	No	No	No	No	No

MCBs

S 200 series B characteristic

S 201

S 202

S 203

S 200 B characteristic

Function: protection and control of the circuits against overloads and short-circuits; protection for people and large length of cables in TN and IT systems.

Applications: residential, commercial and industrial.

Standard: IEC/EN 60898-1, IEC/EN 60947-2

Icn=6 kA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	6	464901	S201-B6	2CDS251001R0065		0.112	10
	10	463805	S201-B10	2CDS251001R0105		0.112	10
	13	465007	S201-B13	2CDS251001R0135		0.115	10
	16	578639	S201-B16	2CDS251001R1165		0.115	10
	20 *1	465106	S201-B20	2CDS251001R0205		0.115	10
	25	465205	S201-B25	2CDS251001R0255		0.115	10
	32 *2	465304	S201-B32	2CDS251001R0325		0.120	10
	40 *3	465403	S201-B40	2CDS251001R0405		0.120	10
	50	550925	S201-B50	2CDS251001R0505		0.120	10
	63	550932	S201-B63	2CDS251001R0635		0.120	10
2	6	466400	S202-B6	2CDS252001R0065		0.224	5
	10	466608	S202-B10	2CDS252001R0105		0.224	5
	13	466707	S202-B13	2CDS252001R0135		0.230	5
	16	466905	S202-B16	2CDS252001R0165		0.230	5
	20	467001	S202-B20	2CDS252001R0205		0.230	5
	25	467100	S202-B25	2CDS252001R0255		0.230	5
	32	467209	S202-B32	2CDS252001R0325		0.240	5
	40	467407	S202-B40	2CDS252001R0405		0.240	5
	50	550949	S202-B50	2CDS252001R0505		0.240	5
	63	550956	S202-B63	2CDS252001R0635		0.240	5
3	6	468602	S203-B6	2CDS253001R0065		0.336	1
	10	468701	S203-B10	2CDS253001R0105		0.336	1
	13	468909	S203-B13	2CDS253001R0135		0.345	1
	16	469005	S203-B16	2CDS253001R0165		0.345	1
	20 *1	469104	S203-B20	2CDS253001R0205		0.345	1
	25	469203	S203-B25	2CDS253001R0255		0.345	1
	32 *2	469302	S203-B32	2CDS253001R0325		0.360	1
	40 *3	469401	S203-B40	2CDS253001R0405		0.360	1
	50	550963	S203-B50	2CDS253001R0505		0.360	1
	63	550970	S203-B63	2CDS253001R0635		0.360	1

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series B characteristic

S 204

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
4	6	528955	S204-B6	2CDS254001R0065		0.448	1
	10	528962	S204-B10	2CDS254001R0105		0.448	1
	13	528979	S204-B13	2CDS254001R0135		0.460	1
	16	528986	S204-B16	2CDS254001R0165		0.460	1
	20	528993	S204-B20	2CDS254001R0205		0.460	1
	25	529006	S204-B25	2CDS254001R0255		0.460	1
	32	529013	S204-B32	2CDS254001R0325		0.480	1
	40	529020	S204-B40	2CDS254001R0405		0.480	1
	50	550987	S204-B50	2CDS254001R0505		0.480	1
	63	550994	S204-B63	2CDS254001R0635		0.480	1

With disconnecting neutral NA

S 201 NA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	6	531580	S201-B6NA	2CDS251103R0065		0.217	5
	10	531597	S201-B10NA	2CDS251103R0105		0.217	5
	13	531603	S201-B13NA	2CDS251103R0135		0.220	5
	16	531610	S201-B16NA	2CDS251103R0165		0.220	5
	20 *1	531627	S201-B20NA	2CDS251103R0205		0.220	5
	25	531634	S201-B25NA	2CDS251103R0255		0.225	5
	32 *2	531641	S201-B32NA	2CDS251103R0325		0.230	5
	40 *3	531658	S201-B40NA	2CDS251103R0405		0.230	5
	50	536158	S201-B50NA	2CDS251103R0505		0.230	5
	63	536141	S201-B63NA	2CDS251103R0635		0.230	5
3+NA	6	532280	S203-B6NA	2CDS253103R0065		0.441	1
	10	532297	S203-B10NA	2CDS253103R0105		0.441	1
	13	532303	S203-B13NA	2CDS253103R0135		0.450	1
	16	532310	S203-B16NA	2CDS253103R0165		0.450	1
	20 *1	532327	S203-B20NA	2CDS253103R0205		0.450	1
	25	532334	S203-B25NA	2CDS253103R0255		0.455	1
	32 *2	532341	S203-B32NA	2CDS253103R0325		0.470	1
	40 *3	532358	S203-B40NA	2CDS253103R0405		0.470	1
	50	536165	S203-B50NA	2CDS253103R0505		0.470	1
	63	536172	S203-B63NA	2CDS253103R0635		0.470	1

S 203 NA

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series C characteristic

S 201

S 202

S 200 C characteristic

Function: protection and control of the circuits against overloads and short-circuits; protection for resistive and inductive loads with low inrush current.

Applications: residential, commercial and industrial.

Standard: IEC/EN 60898-1, IEC/EN 60947-2

Icn=6 kA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	523295	S201-C0.5	2CDS251001R0984		0.112	10
	1	523318	S201-C1	2CDS251001R0014		0.112	10
	1.6	523301	S201-C1.6	2CDS251001R0974		0.112	10
	2	523325	S201-C2	2CDS251001R0024		0.112	10
	3	523332	S201-C3	2CDS251001R0034		0.112	10
	4	523349	S201-C4	2CDS251001R0044		0.112	10
	6	464000	S201-C6	2CDS251001R0064		0.112	10
	8	464109	S201-C8	2CDS251001R0084		0.112	10
	10	464208	S201-C10	2CDS251001R0104		0.112	10
	13	464307	S201-C13	2CDS251001R0134		0.115	10
	16	464406	S201-C16	2CDS251001R0164		0.115	10
	20 *1	464505	S201-C20	2CDS251001R0204		0.115	10
	25	464604	S201-C25	2CDS251001R0254		0.115	10
	32 *2	464703	S201-C32	2CDS251001R0324		0.120	10
	40 *3	464802	S201-C40	2CDS251001R0404		0.120	10
	50	551007	S201-C50	2CDS251001R0504		0.120	10
	63	551014	S201-C63	2CDS251001R0634		0.120	10
2	0.5	523356	S202-C0.5	2CDS252001R0984		0.224	5
	1	523363	S202-C1	2CDS252001R0014		0.224	5
	1.6	523370	S202-C1.6	2CDS252001R0974		0.224	5
	2	523387	S202-C2	2CDS252001R0024		0.224	5
	3	523394	S202-C3	2CDS252001R0034		0.224	5
	4	523400	S202-C4	2CDS252001R0044		0.224	5
	6	465502	S202-C6	2CDS252001R0064		0.224	5
	8	465601	S202-C8	2CDS252001R0084		0.224	5
	10	465700	S202-C10	2CDS252001R0104		0.224	5
	13	465809	S202-C13	2CDS252001R0134		0.230	5
	16	465908	S202-C16	2CDS252001R0164		0.230	5
	20 *1	466004	S202-C20	2CDS252001R0204		0.230	5
	25	466103	S202-C25	2CDS252001R0254		0.230	5
	32 *2	466202	S202-C32	2CDS252001R0324		0.240	5
	40 *3	466301	S202-C40	2CDS252001R0404		0.240	5
	50	551045	S202-C50	2CDS252001R0504		0.240	5
	63	551052	S202-C63	2CDS252001R0634		0.240	5

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series C characteristic

S 203

S 204

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	1	523424	S203-C1	2CDS253001R0014		0.336	1
	1.6	523431	S203-C1.6	2CDS253001R0974		0.336	1
	2	523448	S203-C2	2CDS253001R0024		0.336	1
	3	523455	S203-C3	2CDS253001R0034		0.336	1
	4	523462	S203-C4	2CDS253001R0044		0.336	1
	6	467506	S203-C6	2CDS253001R0064		0.336	1
	8	467605	S203-C8	2CDS253001R0084		0.336	1
	10	467803	S203-C10	2CDS253001R0104		0.336	1
	13	467902	S203-C13	2CDS253001R0134		0.345	1
	16	468008	S203-C16	2CDS253001R0164		0.345	1
	20 *1	468107	S203-C20	2CDS253001R0204		0.345	1
	25	468206	S203-C25	2CDS253001R0254		0.345	1
	32 *2	468305	S203-C32	2CDS253001R0324		0.360	1
	40 *3	468404	S203-C40	2CDS253001R0404		0.360	1
	50	551069	S203-C50	2CDS253001R0504		0.360	1
	63	551076	S203-C63	2CDS253001R0634		0.360	1
4	0.5	529112	S204-C0.5	2CDS254001R0984		0.448	1
	1	529129	S204-C1	2CDS254001R0014		0.448	1
	1.6	529136	S204-C1.6	2CDS254001R0974		0.448	1
	2	529143	S204-C2	2CDS254001R0024		0.448	1
	3	529150	S204-C3	2CDS254001R0034		0.448	1
	4	529167	S204-C4	2CDS254001R0044		0.448	1
	6	529174	S204-C6	2CDS254001R0064		0.448	1
	8	529181	S204-C8	2CDS254001R0084		0.448	1
	10	529198	S204-C10	2CDS254001R0104		0.448	1
	13	529204	S204-C13	2CDS254001R0134		0.460	1
	16	529211	S204-C16	2CDS254001R0164		0.460	1
	20 *1	529228	S204-C20	2CDS254001R0204		0.460	1
	25	529235	S204-C25	2CDS254001R0254		0.460	1
	32 *2	529242	S204-C32	2CDS254001R0324		0.480	1
	40 *3	529259	S204-C40	2CDS254001R0404		0.480	1
	50	551106	S204-C50	2CDS254001R0504		0.480	1
	63	551113	S204-C63	2CDS254001R0634		0.480	1

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series C characteristic

S 201 NA

S 203 NA

With disconnecting neutral NA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0.5	531665	S201-C0.5NA	2CDS251103R0984		0.217	5
	1	531672	S201-C1NA	2CDS251103R0014		0.217	5
	1.6	531689	S201-C1.6NA	2CDS251103R0974		0.217	5
	2	531696	S201-C2NA	2CDS251103R0024		0.217	5
	3	531702	S201-C3NA	2CDS251103R0034		0.217	5
	4	531726	S201-C4NA	2CDS251103R0044		0.217	5
	6	531733	S201-C6NA	2CDS251103R0064		0.217	5
	8	531740	S201-C8NA	2CDS251103R0084		0.217	5
	10	531757	S201-C10NA	2CDS251103R0104		0.217	5
	13	531764	S201-C13NA	2CDS251103R0134		0.220	5
	16	531771	S201-C16NA	2CDS251103R0164		0.220	5
	20 *1	531788	S201-C20NA	2CDS251103R0204		0.220	5
	25	531795	S201-C25NA	2CDS251103R0254		0.225	5
	32 *2	531801	S201-C32NA	2CDS251103R0324		0.230	5
	40 *3	531818	S201-C40NA	2CDS251103R0404		0.230	5
	50	551021	S201-C50NA	2CDS251103R0504		0.230	5
	63	551038	S201-C63NA	2CDS251103R0634		0.230	5
3+NA	0.5	532365	S203-C0.5NA	2CDS253103R0984		0.441	1
	1	532372	S203-C1NA	2CDS253103R0014		0.441	1
	1.6	532389	S203-C1.6NA	2CDS253103R0974		0.441	1
	2	532402	S203-C2NA	2CDS253103R0024		0.441	1
	3	532419	S203-C3NA	2CDS253103R0034		0.441	1
	4	532426	S203-C4NA	2CDS253103R0044		0.441	1
	6	532433	S203-C6NA	2CDS253103R0064		0.441	1
	8	532440	S203-C8NA	2CDS253103R0084		0.441	1
	10	532457	S203-C10NA	2CDS253103R0104		0.441	1
	13	532464	S203-C13NA	2CDS253103R0134		0.450	1
	16	532471	S203-C16NA	2CDS253103R0164		0.450	1
	20 *1	532488	S203-C20NA	2CDS253103R0204		0.450	1
	25	532495	S203-C25NA	2CDS253103R0254		0.455	1
	32 *2	532501	S203-C32NA	2CDS253103R0324		0.470	1
	40 *1	532518	S203-C40NA	2CDS253103R0404		0.470	1
	50	551083	S203-C50NA	2CDS253103R0504		0.470	1
	63	551090	S203-C63NA	2CDS253103R0634		0.470	1

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series D characteristic

S 201

S 202

S 200 D characteristic

Function: protection and control of the circuits against overloads and short-circuits; protection for circuits which supply loads with high inrush current at the circuit closing (LV/LV transformers, breakdown lamps).

Applications: residential, commercial and industrial.

Standard: IEC/EN 60898-1, IEC/EN 60947-2

Icn=6 kA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	529938	S201-D0.5	2CDS251001R0981		0.112	10
	1	529945	S201-D1	2CDS251001R0011		0.112	10
	1.6	529952	S201-D1.6	2CDS251001R0971		0.112	10
	2	529969	S201-D2	2CDS251001R0021		0.112	10
	3	529976	S201-D3	2CDS251001R0031		0.112	10
	4	529983	S201-D4	2CDS251001R0041		0.112	10
	6	529990	S201-D6	2CDS251001R0061		0.112	10
	8	530002	S201-D8	2CDS251001R0081		0.112	10
	10	530019	S201-D10	2CDS251001R0101		0.112	10
	13	530026	S201-D13	2CDS251001R0131		0.115	10
	16	530033	S201-D16	2CDS251001R0161		0.115	10
	20 *1	530040	S201-D20	2CDS251001R0201		0.115	10
	25	530057	S201-D25	2CDS251001R0251		0.115	10
	32 *2	530064	S201-D32	2CDS251001R0321		0.120	10
	40 *3	530071	S201-D40	2CDS251001R0401		0.120	10
	50	551991	S201-D50	2CDS251001R0501		0.120	10
	63	552004	S201-D63	2CDS251001R0631		0.120	10
2	0.5	530484	S202-D0.5	2CDS252001R0981		0.224	5
	1	530491	S202-D1	2CDS252001R0011		0.224	5
	1.6	530507	S202-D1.6	2CDS252001R0971		0.224	5
	2	530514	S202-D2	2CDS252001R0021		0.224	5
	3	530521	S202-D3	2CDS252001R0031		0.224	5
	4	530538	S202-D4	2CDS252001R0041		0.224	5
	6	530545	S202-D6	2CDS252001R0061		0.224	5
	8	530552	S202-D8	2CDS252001R0081		0.224	5
	10	530583	S202-D10	2CDS252001R0101		0.224	5
	13	530606	S202-D13	2CDS252001R0131		0.230	5
	16	530613	S202-D16	2CDS252001R0161		0.230	5
	20	530637	S202-D20	2CDS252001R0201		0.230	5
	25	530644	S202-D25	2CDS252001R0251		0.230	5
	32	530651	S202-D32	2CDS252001R0321		0.240	5
	40	530668	S202-D40	2CDS252001R0401		0.240	5
	50	552035	S202-D50	2CDS252001R0501		0.240	5
	63	552042	S202-D63	2CDS252001R0631		0.240	5

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series D characteristic

S 203

S 204

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.5	530811	S203-D0.5	2CDS253001R0981		0.336	1
	1	530828	S203-D1	2CDS253001R0011		0.336	1
	1.6	530835	S203-D1.6	2CDS253001R0971		0.336	1
	2	530842	S203-D2	2CDS253001R0021		0.336	1
	3	530859	S203-D3	2CDS253001R0031		0.336	1
	4	530866	S203-D4	2CDS253001R0041		0.336	1
	6	530880	S203-D6	2CDS253001R0061		0.336	1
	8	530897	S203-D8	2CDS253001R0081		0.336	1
	10	530903	S203-D10	2CDS253001R0101		0.336	1
	13	530910	S203-D13	2CDS253001R0131		0.345	1
	16	530927	S203-D16	2CDS253001R0161		0.345	1
	20 *1	530934	S203-D20	2CDS253001R0201		0.345	1
	25	530941	S203-D25	2CDS253001R0251		0.345	1
	32 *2	530958	S203-D32	2CDS253001R0321		0.360	1
	40 *3	530965	S203-D40	2CDS253001R0401		0.360	1
	50	552059	S203-D50	2CDS253001R0501		0.360	1
	63	552066	S203-D63	2CDS253001R0631		0.360	1
4	0.5	531122	S204-D0.5	2CDS254001R0981		0.448	1
	1	531139	S204-D1	2CDS254001R0011		0.448	1
	1.6	531146	S204-D1.6	2CDS254001R0971		0.448	1
	2	531153	S204-D2	2CDS254001R0021		0.448	1
	3	531160	S204-D3	2CDS254001R0031		0.448	1
	4	531177	S204-D4	2CDS254001R0041		0.448	1
	6	531184	S204-D6	2CDS254001R0061		0.448	1
	8	531191	S204-D8	2CDS254001R0081		0.448	1
	10	531207	S204-D10	2CDS254001R0101		0.448	1
	13	531214	S204-D13	2CDS254001R0131		0.460	1
	16	531221	S204-D16	2CDS254001R0161		0.460	1
	20	531238	S204-D20	2CDS254001R0201		0.460	1
	25	531290	S204-D25	2CDS254001R0251		0.460	1
	32	531306	S204-D32	2CDS254001R0321		0.480	1
	40	531313	S204-D40	2CDS254001R0401		0.480	1
	50	552097	S204-D50	2CDS254001R0501		0.480	1
	63	552103	S204-D63	2CDS254001R0631		0.480	1

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series D characteristic

S 201 NA

S 203 NA

With disconnecting neutral NA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0.5	531979	S201-D0.5NA	2CDS251103R0981		0.217	5
	1	531986	S201-D1NA	2CDS251103R0011		0.217	5
	1.6	531993	S201-D1.6NA	2CDS251103R0971		0.217	5
	2	532006	S201-D2NA	2CDS251103R0021		0.217	5
	3	532013	S201-D3NA	2CDS251103R0031		0.217	5
	4	532020	S201-D4NA	2CDS251103R0041		0.217	5
	6	532037	S201-D6NA	2CDS251103R0061		0.217	5
	8	532044	S201-D8NA	2CDS251103R0081		0.217	5
	10	532051	S201-D10NA	2CDS251103R0101		0.217	5
	13	532068	S201-D13NA	2CDS251103R0131		0.220	5
	16	532099	S201-D16NA	2CDS251103R0161		0.220	5
	20 *1	532105	S201-D20NA	2CDS251103R0201		0.220	5
	25	532112	S201-D25NA	2CDS251103R0251		0.225	5
	32 *2	532129	S201-D32NA	2CDS251103R0321		0.230	5
	40 *3	532136	S201-D40NA	2CDS251103R0401		0.230	5
	50	552011	S201-D50NA	2CDS251103R0501		0.230	5
	63	552028	S201-D63NA	2CDS251103R0631		0.230	5
3+NA	0.5	532761	S203-D0.5NA	2CDS253103R0981		0.441	2
	1	532778	S203-D1NA	2CDS253103R0011		0.441	2
	1.6	532785	S203-D1.6NA	2CDS253103R0971		0.441	2
	2	532792	S203-D2NA	2CDS253103R0021		0.441	2
	3	532808	S203-D3NA	2CDS253103R0031		0.441	2
	4	532815	S203-D4NA	2CDS253103R0041		0.441	2
	6	532822	S203-D6NA	2CDS253103R0061		0.441	2
	8	532839	S203-D8NA	2CDS253103R0081		0.441	2
	10	532846	S203-D10NA	2CDS253103R0101		0.441	2
	13	532860	S203-D13NA	2CDS253103R0131		0.450	2
	16	532877	S203-D16NA	2CDS253103R0161		0.450	2
	20 *1	532884	S203-D20NA	2CDS253103R0201		0.450	2
	25	532891	S203-D25NA	2CDS253103R0251		0.455	2
	32 *2	532907	S203-D32NA	2CDS253103R0321		0.470	2
	40 *3	532914	S203-D40NA	2CDS253103R0401		0.470	2
	50	552073	S203-D50NA	2CDS253103R0501		0.470	2
	63	552080	S203-D63NA	2CDS253103R0631		0.470	2

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series K characteristic

S 200 K (power) characteristic
Function: protection and control of the circuits like motors, transformer and auxiliary circuits, against overloads and short-circuits.
Advantages: no nuisance tripping in the case of functional peak currents up to 10xIn, depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=10 kA

S 201

S 202

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	507196	S201-K0.5	2CDS251001R0157		0.112	10
	1	507202	S201-K1	2CDS251001R0217		0.112	10
	1.6	507219	S201-K1.6	2CDS251001R0257		0.112	10
	2	507226	S201-K2	2CDS251001R0277		0.112	10
	3	507233	S201-K3	2CDS251001R0317		0.112	10
	4	507240	S201-K4	2CDS251001R0337		0.112	10
	6	507257	S201-K6	2CDS251001R0377		0.112	10
	8	507264	S201-K8	2CDS251001R0407		0.112	10
	10	496117	S201-K10	2CDS251001R0427		0.112	10
	13	507271	S201-K13	2CDS251001R0447		0.115	10
	16	496124	S201-K16	2CDS251001R0467		0.115	10
	20	507288	S201-K20	2CDS251001R0487		0.115	10
	25	507295	S201-K25	2CDS251001R0517		0.115	10
	32	496131	S201-K32	2CDS251001R0537		0.120	10
	40	507301	S201-K40	2CDS251001R0557		0.120	10
	50	551120	S201-K50	2CDS251001R0577		0.120	10
	63	551137	S201-K63	2CDS251001R0607		0.120	10
2	0.5	507318	S202-K0.5	2CDS252001R0157		0.224	5
	1	507325	S202-K1	2CDS252001R0217		0.224	5
	1.6	507332	S202-K1.6	2CDS252001R0257		0.224	5
	2	507349	S202-K2	2CDS252001R0277		0.224	5
	3	507356	S202-K3	2CDS252001R0317		0.224	5
	4	507363	S202-K4	2CDS252001R0337		0.224	5
	6	507370	S202-K6	2CDS252001R0377		0.224	5
	8	507387	S202-K8	2CDS252001R0407		0.224	5
	10	507394	S202-K10	2CDS252001R0427		0.224	5
	13	507400	S202-K13	2CDS252001R0447		0.230	5
	16	507417	S202-K16	2CDS252001R0467		0.230	5
	20	507424	S202-K20	2CDS252001R0487		0.230	5
	25	507431	S202-K25	2CDS252001R0517		0.230	5
	32	507448	S202-K32	2CDS252001R0537		0.240	5
	40	507455	S202-K40	2CDS252001R0557		0.240	5
	50	551168	S202-K50	2CDS252001R0577		0.240	5
	63	551175	S202-K63	2CDS252001R0607		0.240	5

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series K characteristic

S 203

S 204

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.5	507462	S203-K0.5	2CDS253001R0157		0.336	1
	1	507479	S203-K1	2CDS253001R0217		0.336	1
	1.6	507486	S203-K1.6	2CDS253001R0257		0.336	1
	2	507493	S203-K2	2CDS253001R0277		0.336	1
	3	507509	S203-K3	2CDS253001R0317		0.336	1
	4	507516	S203-K4	2CDS253001R0337		0.336	1
	6	507523	S203-K6	2CDS253001R0377		0.336	1
	8	507530	S203-K8	2CDS253001R0407		0.336	1
	10	496148	S203-K10	2CDS253001R0427		0.336	1
	13	507547	S203-K13	2CDS253001R0447		0.345	1
	16	496155	S203-K16	2CDS253001R0467		0.345	1
	20	507554	S203-K20	2CDS253001R0487		0.345	1
	25	507561	S203-K25	2CDS253001R0517		0.345	1
	32	496162	S203-K32	2CDS253001R0537		0.360	1
	40	507578	S203-K40	2CDS253001R0557		0.360	1
	50	551182	S203-K50	2CDS253001R0577		0.360	1
	63	551199	S203-K63	2CDS253001R0607		0.360	1
4	0.5	529266	S204-K0.5	2CDS254001R0157		0.448	1
	1	529273	S204-K1	2CDS254001R0217		0.448	1
	1.6	529280	S204-K1.6	2CDS254001R0257		0.448	1
	2	529297	S204-K2	2CDS254001R0277		0.448	1
	3	529303	S204-K3	2CDS254001R0317		0.448	1
	4	529310	S204-K4	2CDS254001R0337		0.448	1
	6	529327	S204-K6	2CDS254001R0377		0.448	1
	8	529334	S204-K8	2CDS254001R0407		0.448	1
	10	529341	S204-K10	2CDS254001R0427		0.448	1
	13	529358	S204-K13	2CDS254001R0447		0.460	1
	16	529365	S204-K16	2CDS254001R0467		0.460	1
	20	529372	S204-K20	2CDS254001R0487		0.460	1
	25	529389	S204-K25	2CDS254001R0517		0.460	1
	32	529396	S204-K32	2CDS254001R0537		0.480	1
	40	529402	S204-K40	2CDS254001R0557		0.480	1
	50	551229	S204-K50	2CDS254001R0577		0.480	1
	63	551236	S204-K63	2CDS254001R0607		0.480	1

MCBs

S 200 series K characteristic

S 201 NA

S 203 NA

With disconnecting neutral NA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0.5	531825	S201-K0.5NA	2CDS251103R0157		0.217	5
	1	531832	S201-K1NA	2CDS251103R0217		0.217	5
	1.6	531849	S201-K1.6NA	2CDS251103R0257		0.217	5
	2	531856	S201-K2NA	2CDS251103R0277		0.217	5
	3	531863	S201-K3NA	2CDS251103R0317		0.217	5
	4	531870	S201-K4NA	2CDS251103R0337		0.217	5
	6	531887	S201-K6NA	2CDS251103R0377		0.217	5
	8	531894	S201-K8NA	2CDS251103R0407		0.217	5
	10	531900	S201-K10NA	2CDS251103R0427		0.217	5
	13	531917	S201-K13NA	2CDS251103R0447		0.220	5
	16	531924	S201-K16NA	2CDS251103R0467		0.220	5
	20	531931	S201-K20NA	2CDS251103R0487		0.220	5
	25	531948	S201-K25NA	2CDS251103R0517		0.225	5
	32	531955	S201-K32NA	2CDS251103R0537		0.230	5
	40	531962	S201-K40NA	2CDS251103R0557		0.230	5
	50	551144	S201-K50NA	2CDS251103R0577		0.230	5
	63	551151	S201-K63NA	2CDS251103R0607		0.230	5
3+NA	0.5	532617	S203-K0.5NA	2CDS253103R0157		0.441	1
	1	532624	S203-K1NA	2CDS253103R0217		0.441	1
	1.6	532631	S203-K1.6NA	2CDS253103R0257		0.441	1
	2	532648	S203-K2NA	2CDS253103R0277		0.441	1
	3	532655	S203-K3NA	2CDS253103R0317		0.441	1
	4	532662	S203-K4NA	2CDS253103R0337		0.441	1
	6	532679	S203-K6NA	2CDS253103R0377		0.441	1
	8	532686	S203-K8NA	2CDS253103R0407		0.441	1
	10	532693	S203-K10NA	2CDS253103R0427		0.441	1
	13	532709	S203-K13NA	2CDS253103R0447		0.450	1
	16	532716	S203-K16NA	2CDS253103R0467		0.450	1
	20	532723	S203-K20NA	2CDS253103R0487		0.450	1
	25	532730	S203-K25NA	2CDS253103R0517		0.455	1
	32	532747	S203-K32NA	2CDS253103R0537		0.470	1
	40	532754	S203-K40NA	2CDS253103R0557		0.470	1
	50	551205	S203-K50NA	2CDS253103R0577		0.470	1
	63	551212	S203-K63NA	2CDS253103R0607		0.470	1

MCBs

S 200 series Z characteristic

S 201

S 202

S 200 Z characteristic
Function: protection and control of the electronic circuits against lower and long duration overloads and short-circuits.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=10 kA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	530309	S201-Z0.5	2CDS251001R0158		0.112	10
	1	530330	S201-Z1	2CDS251001R0218		0.112	10
	1.6	530347	S201-Z1.6	2CDS251001R0258		0.112	10
	2	530354	S201-Z2	2CDS251001R0278		0.112	10
	3	530361	S201-Z3	2CDS251001R0318		0.112	10
	4	530378	S201-Z4	2CDS251001R0338		0.112	10
	6	530408	S201-Z6	2CDS251001R0378		0.112	10
	8	530415	S201-Z8	2CDS251001R0408		0.112	10
	10	530422	S201-Z10	2CDS251001R0428		0.112	10
	16	530439	S201-Z16	2CDS251001R0468		0.115	10
	20	530446	S201-Z20	2CDS251001R0488		0.115	10
	25	530453	S201-Z25	2CDS251001R0518		0.115	10
	32	530460	S201-Z32	2CDS251001R0538		0.120	10
	40	530477	S201-Z40	2CDS251001R0558		0.120	10
	50	551915	S201-Z50	2CDS251001R0578		0.120	10
	63	551922	S201-Z63	2CDS251001R0608		0.120	10
2	0.5	530682	S202-Z0.5	2CDS252001R0158		0.224	5
	1	530675	S202-Z1	2CDS252001R0218		0.224	5
	1.6	530699	S202-Z1.6	2CDS252001R0258		0.224	5
	2	530705	S202-Z2	2CDS252001R0278		0.224	5
	3	530712	S202-Z3	2CDS252001R0318		0.224	5
	4	530729	S202-Z4	2CDS252001R0338		0.224	5
	6	530736	S202-Z6	2CDS252001R0378		0.224	5
	8	530743	S202-Z8	2CDS252001R0408		0.224	5
	10	530750	S202-Z10	2CDS252001R0428		0.224	5
	16	530767	S202-Z16	2CDS252001R0468		0.230	5
	20	530774	S202-Z20	2CDS252001R0488		0.230	5
	25	530781	S202-Z25	2CDS252001R0518		0.230	5
	32	530798	S202-Z32	2CDS252001R0538		0.240	5
	40	530804	S202-Z40	2CDS252001R0558		0.240	5
	50	551939	S202-Z50	2CDS252001R0578		0.240	5
	63	551946	S202-Z63	2CDS252001R0608		0.240	5

MCBs

S 200 series Z characteristic

S 203

S 204

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.5	530972	S203-Z0.5	2CDS253001R0158		0.336	1
	1	530989	S203-Z1	2CDS253001R0218		0.336	1
	1.6	530996	S203-Z1.6	2CDS253001R0258		0.336	1
	2	531009	S203-Z2	2CDS253001R0278		0.336	1
	3	531016	S203-Z3	2CDS253001R0318		0.336	1
	4	531023	S203-Z4	2CDS253001R0338		0.336	1
	6	531030	S203-Z6	2CDS253001R0378		0.336	1
	8	531047	S203-Z8	2CDS253001R0408		0.336	1
	10	531054	S203-Z10	2CDS253001R0428		0.336	1
	16	531061	S203-Z16	2CDS253001R0468		0.345	1
	20	531078	S203-Z20	2CDS253001R0488		0.345	1
	25	531085	S203-Z25	2CDS253001R0518		0.345	1
	32	531092	S203-Z32	2CDS253001R0538		0.360	1
	40	531108	S203-Z40	2CDS253001R0558		0.360	1
	50	551953	S203-Z50	2CDS253001R0578		0.360	1
	63	551960	S203-Z63	2CDS253001R0608		0.360	1
4	0.5	530248	S204-Z0.5	2CDS254001R0158		0.448	1
	1	531320	S204-Z1	2CDS254001R0218		0.448	1
	1.6	531443	S204-Z1.6	2CDS254001R0258		0.448	1
	2	531436	S204-Z2	2CDS254001R0278		0.448	1
	3	531337	S204-Z3	2CDS254001R0318		0.448	1
	4	531344	S204-Z4	2CDS254001R0338		0.448	1
	6	531351	S204-Z6	2CDS254001R0378		0.448	1
	8	531368	S204-Z8	2CDS254001R0408		0.448	1
	10	531375	S204-Z10	2CDS254001R0428		0.448	1
	16	531382	S204-Z16	2CDS254001R0468		0.460	1
	20	531399	S204-Z20	2CDS254001R0488		0.460	1
	25	531405	S204-Z25	2CDS254001R0518		0.460	1
	32	531412	S204-Z32	2CDS254001R0538		0.480	1
	40	531429	S204-Z40	2CDS254001R0558		0.480	1
	50	551977	S204-Z50	2CDS254001R0578		0.480	1
	63	551984	S204-Z63	2CDS254001R0608		0.480	1

MCBs

S 200 series Z characteristic

S 201 NA

S 203 NA

With disconnecting neutral NA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0.5	532143	S201-Z0.5NA	2CDS251103R0158		0.217	5
	1	532150	S201-Z1NA	2CDS251103R0218		0.217	5
	1.6	532167	S201-Z1.6NA	2CDS251103R0258		0.217	5
	2	532174	S201-Z2NA	2CDS251103R0278		0.217	5
	3	532181	S201-Z3NA	2CDS251103R0318		0.217	5
	4	532198	S201-Z4NA	2CDS251103R0338		0.217	5
	6	532204	S201-Z6NA	2CDS251103R0378		0.217	5
	8	532211	S201-Z8NA	2CDS251103R0408		0.217	5
	10	532228	S201-Z10NA	2CDS251103R0428		0.217	5
	16	532235	S201-Z16NA	2CDS251103R0468		0.220	5
	20	532242	S201-Z20NA	2CDS251103R0488		0.220	5
	25	532259	S201-Z25NA	2CDS251103R0518		0.225	5
	32	532266	S201-Z32NA	2CDS251103R0538		0.230	5
	40	532273	S201-Z40NA	2CDS251103R0558		0.230	5
	50	552127	S201-Z50NA	2CDS251103R0578		0.230	5
	63	552134	S201-Z63NA	2CDS251103R0608		0.230	5
3+NA	0.5	53292 1	S203-Z0.5NA	2CDS253103R0158		0.441	1
	1	53293 8	S203-Z1NA	2CDS253103R0218		0.441	1
	1.6	53294 5	S203-Z1.6NA	2CDS253103R0258		0.441	1
	2	53295 2	S203-Z2NA	2CDS253103R0278		0.441	1
	3	53297 6	S203-Z3NA	2CDS253103R0318		0.441	1
	4	53298 3	S203-Z4NA	2CDS253103R0338		0.441	1
	6	53299 0	S203-Z6NA	2CDS253103R0378		0.441	1
	8	53300 3	S203-Z8NA	2CDS253103R0408		0.441	1
	10	53301 0	S203-Z10NA	2CDS253103R0428		0.441	1
	16	53302 7	S203-Z16NA	2CDS253103R0468		0.450	1
	20	53305 8	S203-Z20NA	2CDS253103R0488		0.450	1
	25	53306 5	S203-Z25NA	2CDS253103R0518		0.455	1
	32	53307 2	S203-Z32NA	2CDS253103R0538		0.470	1
	40	53308 9	S203-Z40NA	2CDS253103R0558		0.470	1
	50	55214 1	S203-Z50NA	2CDS253103R0578		0.470	1
	63	55216 5	S203-Z63NA	2CDS253103R0608		0.470	1

MCBs

S 200 series M-B characteristic

S 201 M

S 202 M

S 203 M

S 200 M-B characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection for people and large length of cables in TN and IT systems.
Applications: residential, commercial and industrial.
Standard: IEC/EN 60898-1, IEC/EN 60947-2
Icn=10 kA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	6	549424	S201M-B6	2CDS271001R0065		0.112	10
	10	549431	S201M-B10	2CDS271001R0105		0.112	10
	13	549448	S201M-B13	2CDS271001R0135		0.115	10
	16	549455	S201M-B16	2CDS271001R0165		0.115	10
	20 *1	549462	S201M-B20	2CDS271001R0205		0.115	10
	25	549479	S201M-B25	2CDS271001R0255		0.115	10
	32 *2	549486	S201M-B32	2CDS271001R0325		0.120	10
	40 *3	549493	S201M-B40	2CDS271001R0405		0.120	10
	50	543811	S201M-B50	2CDS271001R0505		0.120	10
	63	543828	S201M-B63	2CDS271001R0635		0.120	10
2	6	549585	S202M-B6	2CDS272001R0065		0.224	5
	10	549592	S202M-B10	2CDS272001R0105		0.224	5
	13	549608	S202M-B13	2CDS272001R0135		0.230	5
	16	549615	S202M-B16	2CDS272001R0165		0.230	5
	20	549622	S202M-B20	2CDS272001R0205		0.230	5
	25	549639	S202M-B25	2CDS272001R0255		0.230	5
	32	549646	S202M-B32	2CDS272001R0325		0.240	5
	40	549653	S202M-B40	2CDS272001R0405		0.240	5
	50	543859	S202M-B50	2CDS272001R0505		0.240	5
	63	543866	S202M-B63	2CDS272001R0635		0.240	5
3	6	549660	S203M-B 6	2CDS273001R0065		0.336	1
	10	549677	S203M-B10	2CDS273001R0105		0.336	1
	13	549684	S203M-B13	2CDS273001R0135		0.345	1
	16	549691	S203M-B16	2CDS273001R0165		0.345	1
	20 *1	549707	S203M-B20	2CDS273001R0205		0.345	1
	25	549714	S203M-B25	2CDS273001R0255		0.345	1
	32 *2	549721	S203M-B32	2CDS273001R0325		0.360	1
	40 *3	549738	S203M-B40	2CDS273001R0405		0.360	1
	50	543873	S203M-B50	2CDS273001R0505		0.360	1
	63	543880	S203M-B63	2CDS273001R0635		0.360	1

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series M-B characteristic

S 204 M

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
4	6	549820	S204M-B 6	2CDS274001R0065		0.448	1
	10	549837	S204M-B10	2CDS274001R0105		0.448	1
	13	549844	S204M-B13	2CDS274001R0135		0.460	1
	16	549851	S204M-B16	2CDS274001R0165		0.460	1
	20	549868	S204M-B20	2CDS274001R0205		0.460	1
	25	549875	S204M-B25	2CDS274001R0255		0.460	1
	32	549882	S204M-B32	2CDS274001R0325		0.480	1
	40	549899	S204M-B40	2CDS274001R0405		0.480	1
	50	543910	S204M-B50	2CDS274001R0505		0.480	1
	63	543927	S204M-B63	2CDS274001R0635		0.480	1

With disconnecting neutral NA

S 201 M NA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	6	549509	S201M-B6NA	2CDS271103R0065		0.217	5
	10	549516	S201M-B10NA	2CDS271103R0105		0.217	5
	13	549523	S201M-B13NA	2CDS271103R0135		0.220	5
	16	549530	S201M-B16NA	2CDS271103R0165		0.220	5
	20 *1	549547	S201M-B20NA	2CDS271103R0205		0.220	5
	25	549554	S201M-B25NA	2CDS271103R0255		0.225	5
	32 *2	549561	S201M-B32NA	2CDS271103R0325		0.230	5
	40 *3	549578	S201M-B40NA	2CDS271103R0405		0.230	5
	50	543835	S201M-B50NA	2CDS271103R0505		0.230	5
	63	543842	S201M-B63NA	2CDS271103R0635		0.230	5
3+NA	6	549745	S203M-B6NA	2CDS273103R0065		0.441	1
	10	549752	S203M-B10NA	2CDS273103R0105		0.441	1
	13	549769	S203M-B13NA	2CDS273103R0135		0.450	1
	16	549776	S203M-B16NA	2CDS273103R0165		0.450	1
	20 *1	549783	S203M-B20NA	2CDS273103R0205		0.450	1
	25	549790	S203M-B25NA	2CDS273103R0255		0.455	1
	32 *2	549806	S203M-B32NA	2CDS273103R0325		0.470	1
	40 *3	549813	S203M-B40NA	2CDS273103R0405		0.470	1
	50	543897	S203M-B50NA	2CDS273103R0505		0.470	1
	63	543903	S203M-B63NA	2CDS273103R0635		0.470	1

S 203 M NA

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series M-C characteristic

S 201 M

S 202 M

S 200 M-C characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection for resistive and inductive loads with low inrush current.
Applications: residential, commercial and industrial.
Standard: IEC/EN 60898-1, IEC/EN 60947-2
Icn=10 kA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	549905	S201M-C0.5	2CDS271001R0984		0.112	10
	1	549929	S201M-C1	2CDS271001R0014		0.112	10
	1.6	549912	S201M-C1.6	2CDS271001R0974		0.112	10
	2	549936	S201M-C2	2CDS271001R0024		0.112	10
	3	549943	S201M-C3	2CDS271001R0034		0.112	10
	4	549950	S201M-C4	2CDS271001R0044		0.112	10
	6	549967	S201M-C6	2CDS271001R0064		0.112	10
	8	549974	S201M-C8	2CDS271001R0084		0.112	10
	10	549981	S201M-C10	2CDS271001R0104		0.112	10
	13	549998	S201M-C13	2CDS271001R0134		0.115	10
	16	550000	S201M-C16	2CDS271001R0164		0.115	10
	20 *1	550017	S201M-C20	2CDS271001R0204		0.115	10
	25	550024	S201M-C25	2CDS271001R0254		0.115	10
	32 *2	550031	S201M-C32	2CDS271001R0324		0.120	10
	40 *3	550048	S201M-C40	2CDS271001R0404		0.120	10
	50	543934	S201M-C50	2CDS271001R0504		0.120	10
	63	543941	S201M-C63	2CDS271001R0634		0.120	10
2	0.5	550208	S202M-C0.5	2CDS272001R0984		0.224	5
	1	550222	S202M-C1	2CDS272001R0014		0.224	5
	1.6	550215	S202M-C1.6	2CDS272001R0974		0.224	5
	2	550239	S202M-C2	2CDS272001R0024		0.224	5
	3	550246	S202M-C3	2CDS272001R0034		0.224	5
	4	550253	S202M-C4	2CDS272001R0044		0.224	5
	6	550260	S202M-C6	2CDS272001R0064		0.224	5
	8	550277	S202M-C8	2CDS272001R0084		0.224	5
	10	550284	S202M-C10	2CDS272001R0104		0.224	5
	13	550291	S202M-C13	2CDS272001R0134		0.230	5
	16	550307	S202M-C16	2CDS272001R0164		0.230	5
	20	550314	S202M-C20	2CDS272001R0204		0.230	5
	25	550321	S202M-C25	2CDS272001R0254		0.230	5
	32	550338	S202M-C32	2CDS272001R0324		0.240	5
	40	550345	S202M-C40	2CDS272001R0404		0.240	5
	50	543972	S202M-C50	2CDS272001R0504		0.240	5
	63	543989	S202M-C63	2CDS272001R0634		0.240	5

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series M-C characteristic

S 203 M

S 204 M

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.5	550352	S203M-C0.5	2CDS273001R0984		0.336	1
	1	550376	S203M-C1	2CDS273001R0014		0.336	1
	1.6	550369	S203M-C1.6	2CDS273001R0974		0.336	1
	2	550383	S203M-C2	2CDS273001R0024		0.336	1
	3	550390	S203M-C3	2CDS273001R0034		0.336	1
	4	550406	S203M-C4	2CDS273001R0044		0.336	1
	6	550413	S203M-C6	2CDS273001R0064		0.336	1
	8	550420	S203M-C8	2CDS273001R0084		0.336	1
	10	550437	S203M-C10	2CDS273001R0104		0.336	1
	13	550444	S203M-C13	2CDS273001R0134		0.345	1
	16	550451	S203M-C16	2CDS273001R0164		0.345	1
	20 *1	550468	S203M-C20	2CDS273001R0204		0.345	1
	25	550475	S203M-C25	2CDS273001R0254		0.345	1
	32 *2	550482	S203M-C32	2CDS273001R0324		0.360	1
	40 *3	550499	S203M-C40	2CDS273001R0404		0.360	1
	50	543996	S203M-C50	2CDS273001R0504		0.360	1
	63	544009	S203M-C63	2CDS273001R0634		0.360	1
4	0.5	550659	S204M-C0.5	2CDS274001R0984		0.448	1
	1	550673	S204M-C1	2CDS274001R0014		0.448	1
	1.6	550666	S204M-C1.6	2CDS274001R0974		0.448	1
	2	550680	S204M-C2	2CDS274001R0024		0.448	1
	3	550697	S204M-C3	2CDS274001R0034		0.448	1
	4	550703	S204M-C4	2CDS274001R0044		0.448	1
	6	550710	S204M-C6	2CDS274001R0064		0.448	1
	8	550727	S204M-C8	2CDS274001R0084		0.448	1
	10	550734	S204M-C10	2CDS274001R0104		0.448	1
	13	550741	S204M-C13	2CDS274001R0134		0.460	1
	16	550758	S204M-C16	2CDS274001R0164		0.460	1
	20	550765	S204M-C20	2CDS274001R0204		0.460	1
	25	550772	S204M-C25	2CDS274001R0254		0.460	1
	32	550789	S204M-C32	2CDS274001R0324		0.480	1
	40	550796	S204M-C40	2CDS274001R0404		0.480	1
	50	544030	S204M-C50	2CDS274001R0504		0.480	1
	63	544047	S204M-C63	2CDS274001R0634		0.480	1

*1 suitable for flow-type heaters 12 kW

*2 suitable for flow-type heaters 18 kW

*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series M-C characteristic

S 201 M NA

S 203 M NA

With disconnecting neutral NA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0.5	550055	S201M-C0.5NA	2CDS271103R0984		0.217	5
	1	550079	S201M-C1NA	2CDS271103R0014		0.217	5
	1.6	550062	S201M-C1.6NA	2CDS271103R0974		0.217	5
	2	550086	S201M-C2NA	2CDS271103R0024		0.217	5
	3	550093	S201M-C3NA	2CDS271103R0034		0.217	5
	4	550109	S201M-C4NA	2CDS271103R0044		0.217	5
	6	550116	S201M-C6NA	2CDS271103R0064		0.217	5
	8	550123	S201M-C8NA	2CDS271103R0084		0.217	5
	10	550130	S201M-C10NA	2CDS271103R0104		0.217	5
	13	550147	S201M-C13NA	2CDS271103R0134		0.220	5
	16	550154	S201M-C16NA	2CDS271103R0164		0.220	5
	20 *1	550161	S201M-C20NA	2CDS271103R0204		0.220	5
	25	550178	S201M-C25NA	2CDS271103R0254		0.225	5
	32 *2	550185	S201M-C32NA	2CDS271103R0324		0.230	5
	40 *3	550192	S201M-C40NA	2CDS271103R0404		0.230	5
	50	543958	S201M-C50NA	2CDS271103R0504		0.230	5
	63	543965	S201M-C63NA	2CDS271103R0634		0.230	5
3+NA	0.5	550512	S203M-C0.5NA	2CDS273103R0984		0.441	1
	1	550529	S203M-C1NA	2CDS273103R0014		0.441	1
	1.6	550505	S203M-C1.6NA	2CDS273103R0974		0.441	1
	2	550536	S203M-C2NA	2CDS273103R0024		0.441	1
	3	550543	S203M-C3NA	2CDS273103R0034		0.441	1
	4	550550	S203M-C4NA	2CDS273103R0044		0.441	1
	6	550567	S203M-C6NA	2CDS273103R0064		0.441	1
	8	550574	S203M-C8NA	2CDS273103R0084		0.441	1
	10	550581	S203M-C10NA	2CDS273103R0104		0.441	1
	13	550598	S203M-C13NA	2CDS273103R0134		0.450	1
	16	550604	S203M-C16NA	2CDS273103R0164		0.450	1
	20 *1	550611	S203M-C20NA	2CDS273103R0204		0.450	1
	25	550628	S203M-C25NA	2CDS273103R0254		0.455	1
	32 *2	550635	S203M-C32NA	2CDS273103R0324		0.470	1
	40 *3	550642	S203M-C40NA	2CDS273103R0404		0.470	1
	50	544016	S203M-C50NA	2CDS273103R0504		0.470	1
	63	544023	S203M-C63NA	2CDS273103R0634		0.470	1

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series M-D characteristic

S 201 M

S 202 M

S 200 M-D characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection for circuits which supply loads with high inrush current at the circuit closing (LV/LV transformers, breakdown lamps).
Applications: residential, commercial and industrial.
Standard: IEC/EN 60898-1, IEC/EN 60947-2
Icn=10 kA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	599832	S201M-D0.5	2CDS271001R0981		0.112	10
	1	500313	S201M-D1	2CDS271001R0011		0.112	10
	1.6	599825	S201M-D1.6	2CDS271001R0971		0.112	10
	2	599337	S201M-D2	2CDS271001R0021		0.112	10
	3	599351	S201M-D3	2CDS271001R0031		0.112	10
	4	599357	S201M-D4	2CDS271001R0041		0.112	10
	6	599399	S201M-D6	2CDS271001R0061		0.112	10
	8	599405	S201M-D8	2CDS271001R0081		0.112	10
	10	599429	S201M-D10	2CDS271001R0101		0.112	10
	13	663267	S201M-D13	2CDS271001R0131		0.115	10
	16	599450	S201M-D16	2CDS271001R0161		0.115	10
	20 *1	500467	S201M-D20	2CDS271001R0201		0.115	10
	25	599498	S201M-D25	2CDS271001R0251		0.115	10
	32 *2	599566	S201M-D32	2CDS271001R0321		0.120	10
	40 *3	599610	S201M-D40	2CDS271001R0401		0.120	10
	50	599702	S201M-D50	2CDS271001R0501		0.120	10
	63	599818	S201M-D63	2CDS271001R0631		0.120	10
2	0.5	600880	S202M-D0.5	2CDS272001R0981		0.224	5
	1	600361	S202M-D1	2CDS272001R0011		0.224	5
	1.6	600873	S202M-D1.6	2CDS272001R0971		0.224	5
	2	600385	S202M-D2	2CDS272001R0021		0.224	5
	3	600408	S202M-D3	2CDS272001R0031		0.224	5
	4	600422	S202M-D4	2CDS272001R0041		0.224	5
	6	600446	S202M-D6	2CDS272001R0061		0.224	5
	8	600453	S202M-D8	2CDS272001R0081		0.224	5
	10	600477	S202M-D10	2CDS272001R0101		0.224	5
	13	663274	S202M-D13	2CDS272001R0131		0.230	5
	16	600507	S202M-D16	2CDS272001R0161		0.230	5
	20	600514	S202M-D20	2CDS272001R0201		0.230	5
	25	600545	S202M-D25	2CDS272001R0251		0.230	5
	32	600613	S202M-D32	2CDS272001R0321		0.240	5
	40	600668	S202M-D40	2CDS272001R0401		0.240	5
	50	600750	S202M-D50	2CDS272001R0501		0.240	5
	63	600866	S202M-D63	2CDS272001R0631		0.240	5

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series M-D characteristic

S 203 M

S 204 M

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.5	601412	S203M-D0.5	2CDS273001R0981		0.336	1
	1	600897	S203M-D1	2CDS273001R0011		0.336	1
	1.6	601405	S203M-D1.6	2CDS273001R0971		0.336	1
	2	600910	S203M-D2	2CDS273001R0021		0.336	1
	3	600934	S203M-D3	2CDS273001R0031		0.336	1
	4	600958	S203M-D4	2CDS273001R0041		0.336	1
	6	600972	S203M-D6	2CDS273001R0061		0.336	1
	8	600989	S203M-D8	2CDS273001R0081		0.336	1
	10	601009	S203M-D10	2CDS273001R0101		0.336	1
	13	663281	S203M-D13	2CDS273001R0131		0.345	1
	16	601030	S203M-D16	2CDS273001R0161		0.345	1
	20 *1	601047	S203M-D20	2CDS273001R0201		0.345	1
	25	601078	S203M-D25	2CDS273001R0251		0.345	1
	32 *2	601146	S203M-D32	2CDS273001R0321		0.360	1
	40 *3	601191	S203M-D40	2CDS273001R0401		0.360	1
	50	601283	S203M-D50	2CDS273001R0501		0.360	1
	63	601399	S203M-D63	2CDS273001R0631		0.360	1
4	0.5	602143	S204M-D0.5	2CDS274001R0981		0.448	1
	1	601634	S204M-D1	2CDS274001R0011		0.448	1
	1.6	602136	S204M-D1.6	2CDS274001R0971		0.448	1
	2	601658	S204M-D2	2CDS274001R0021		0.448	1
	3	601672	S204M-D3	2CDS274001R0031		0.448	1
	4	601696	S204M-D4	2CDS274001R0041		0.448	1
	6	601719	S204M-D6	2CDS274001R0061		0.448	1
	8	601726	S204M-D8	2CDS274001R0081		0.448	1
	10	601740	S204M-D10	2CDS274001R0101		0.448	1
	13	663298	S204M-D13	2CDS274001R0131		0.460	1
	16	601771	S204M-D16	2CDS274001R0161		0.460	1
	20	601788	S204M-D20	2CDS274001R0201		0.460	1
	25	601818	S204M-D25	2CDS274001R0251		0.460	1
	32	601887	S204M-D32	2CDS274001R0321		0.480	1
	40	601931	S204M-D40	2CDS274001R0401		0.480	1
	50	602013	S204M-D50	2CDS274001R0501		0.480	1
	63	602129	S204M-D63	2CDS274001R0631		0.480	1

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series M-D characteristic

S 201 M NA

S 203 M NA

With disconnecting neutral NA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0.5	600354	S201M-D0.5NA	2CDS271103R0981		0.217	5
	1	599849	S201M-D1NA	2CDS271103R0011		0.217	5
	1.6	600347	S201-MD1.6NA	2CDS271103R0971		0.217	5
	2	599863	S201M-D2NA	2CDS271103R0021		0.217	5
	3	599887	S201M-D3NA	2CDS271103R0031		0.217	5
	4	599900	S201M-D4NA	2CDS271103R0041		0.217	5
	6	599924	S201M-D6NA	2CDS271103R0061		0.217	5
	8	599931	S201M-D8NA	2CDS271103R0081		0.217	5
	10	599948	S201M-D10NA	2CDS271103R0101		0.217	5
	13	663304	S201M-D13NA	2CDS271103R0131		0.220	5
	16	599979	S201M-D16NA	2CDS271103R0161		0.220	5
	20 *1	599986	S201M-D20NA	2CDS271103R0201		0.220	5
	25	600019	S201M-D25NA	2CDS271103R0251		0.225	5
	32 *2	600088	S201M-D32NA	2CDS271103R0321		0.230	5
	40 *3	600132	S201M-D40NA	2CDS271103R0401		0.230	5
	50	600224	S201M-D50NA	2CDS271103R0501		0.230	5
	63	600330	S201M-D63NA	2CDS271103R0631		0.230	5
3+NA	0.5	663311	S203M-D0.5NA	2CDS273103R0981		0.441	1
	1	663328	S203M-D1NA	2CDS273103R0011		0.441	1
	1.6	663335	S203M-D1.6NA	2CDS273103R0971		0.441	1
	2	663342	S203M-D2NA	2CDS273103R0021		0.441	1
	3	663359	S203M-D3NA	2CDS273103R0031		0.441	1
	4	663366	S203M-D4NA	2CDS273103R0041		0.441	1
	6	663373	S203M-D6NA	2CDS273103R0061		0.441	1
	8	663380	S203M-D8NA	2CDS273103R0081		0.441	1
	10	663397	S203M-D10NA	2CDS273103R0101		0.441	1
	13	663403	S203M-D13NA	2CDS273103R0131		0.450	1
	16	663410	S203M-D16NA	2CDS273103R0161		0.450	1
	20 *1	663427	S203M-D20NA	2CDS273103R0201		0.450	1
	25	663434	S203M-D25NA	2CDS273103R0251		0.455	1
	32 *2	663441	S203M-D32NA	2CDS273103R0321		0.470	1
	40 *3	663458	S203M-D40NA	2CDS273103R0401		0.470	1
	50	663465	S203M-D50NA	2CDS273103R0501		0.470	1
	63	663472	S203M-D63NA	2CDS273103R0631		0.470	1

*1 suitable for flow-type heaters 12 kW
*2 suitable for flow-type heaters 18 kW
*3 suitable for flow-type heaters 21, 24 and 27 kW

MCBs

S 200 series M-K characteristic

S 200 M-K (power) characteristic
Function: protection and control of the circuits like motors, transformer and auxiliary circuits, against overloads and short-circuits.
Advantages: no nuisance tripping in the case of functional peak currents up to 10xIn, depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=15 kA

S 201 M

S 202 M

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	599436	S201M-K0.5	2CDS271001R0157		0.112	10
	1	599474	S201M-K1	2CDS271001R0217		0.112	10
	1.6	599504	S201M-K1.6	2CDS271001R0257		0.112	10
	2	599528	S201M-K2	2CDS271001R0277		0.112	10
	3	599542	S201M-K3	2CDS271001R0317		0.112	10
	4	599573	S201M-K4	2CDS271001R0337		0.112	10
	6	599597	S201M-K6	2CDS271001R0377		0.112	10
	8	599627	S201M-K8	2CDS271001R0407		0.112	10
	10	599641	S201M-K10	2CDS271001R0427		0.112	10
	13	659390	S201M-K13	2CDS271001R0447		0.115	10
	16	599665	S201M-K16	2CDS271001R0467		0.115	10
	20	599689	S201M-K20	2CDS271001R0487		0.115	10
	25	599719	S201M-K25	2CDS271001R0517		0.115	10
	32	599733	S201M-K32	2CDS271001R0537		0.120	10
	40	599757	S201M-K40	2CDS271001R0557		0.120	10
	50	599771	S201M-K50	2CDS271001R0577		0.120	10
	63	599795	S201M-K63	2CDS271001R0607		0.120	10
2	0.5	600484	S202M-K0.5	2CDS272001R0157		0.224	5
	1	600521	S202M-K1	2CDS272001R0217		0.224	5
	1.6	600552	S202M-K1.6	2CDS272001R0257		0.224	5
	2	600576	S202M-K2	2CDS272001R0277		0.224	5
	3	600590	S202M-K3	2CDS272001R0317		0.224	5
	4	600620	S202M-K4	2CDS272001R0337		0.224	5
	6	600644	S202M-K6	2CDS272001R0377		0.224	5
	8	600675	S202M-K8	2CDS272001R0407		0.224	5
	10	600699	S202M-K10	2CDS272001R0427		0.224	5
	13	659406	S202M-K13	2CDS272001R0447		0.230	5
	16	600712	S202M-K16	2CDS272001R0467		0.230	5
	20	600736	S202M-K20	2CDS272001R0487		0.230	5
	25	600767	S202M-K25	2CDS272001R0517		0.230	5
	32	600781	S202M-K32	2CDS272001R0537		0.240	5
	40	600804	S202M-K40	2CDS272001R0557		0.240	5
	50	600828	S202M-K50	2CDS272001R0577		0.240	5
	63	600842	S202M-K63	2CDS272001R0607		0.240	5

MCBs

S 200 series M-K characteristic

S 203 M

S 204 M

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.5	601016	S203M-K0.5	2CDS273001R0157		0.336	1
	1	601054	S203M-K1	2CDS273001R0217		0.336	1
	1.6	601085	S203M-K1.6	2CDS273001R0257		0.336	1
	2	601108	S203M-K2	2CDS273001R0277		0.336	1
	3	601122	S203M-K3	2CDS273001R0317		0.336	1
	4	601153	S203M-K4	2CDS273001R0337		0.336	1
	6	601177	S203M-K6	2CDS273001R0377		0.336	1
	8	601207	S203M-K8	2CDS273001R0407		0.336	1
	10	601221	S203M-K10	2CDS273001R0427		0.336	1
	13	659413	S203M-K13	2CDS273001R0447		0.345	1
	16	601245	S203M-K16	2CDS273001R0467		0.345	1
	20	601269	S203M-K20	2CDS273001R0487		0.345	1
	25	601290	S203M-K25	2CDS273001R0517		0.345	1
	32	601313	S203M-K32	2CDS273001R0537		0.360	1
	40	601337	S203M-K40	2CDS273001R0557		0.360	1
	50	601351	S203M-K50	2CDS273001R0577		0.360	1
	63	601375	S203M-K63	2CDS273001R0607		0.360	1
4	0.5	601757	S204M-K0.5	2CDS274001R0157		0.448	1
	1	601795	S204M-K1	2CDS274001R0217		0.448	1
	1.6	601825	S204M-K1.6	2CDS274001R0257		0.448	1
	2	601849	S204M-K2	2CDS274001R0277		0.448	1
	3	601863	S204M-K3	2CDS274001R0317		0.448	1
	4	601894	S204M-K4	2CDS274001R0337		0.448	1
	6	601917	S204M-K6	2CDS274001R0377		0.448	1
	8	601948	S204M-K8	2CDS274001R0407		0.448	1
	10	601962	S204M-K10	2CDS274001R0427		0.448	1
	13	659420	S204M-K13	2CDS274001R0447		0.460	1
	16	601986	S204M-K16	2CDS274001R0467		0.460	1
	20	602006	S204M-K20	2CDS274001R0487		0.460	1
	25	602020	S204M-K25	2CDS274001R0517		0.460	1
	32	602044	S204M-K32	2CDS274001R0537		0.480	1
	40	602068	S204M-K40	2CDS274001R0557		0.480	1
	50	602082	S204M-K50	2CDS274001R0577		0.480	1
	63	602105	S204M-K63	2CDS274001R0607		0.480	1

MCBs

S 200 series M-K characteristic

S 201 M NA

S 203 M NA

With disconnecting neutral NA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0.5	599955	S201M-K0.5NA	2CDS271103R0157		0.217	5
	1	599993	S201M-K1NA	2CDS271103R0217		0.217	5
	1.6	600026	S201M-K1.6NA	2CDS271103R0257		0.217	5
	2	600040	S201M-K2NA	2CDS271103R0277		0.217	5
	3	600064	S201M-K3NA	2CDS271103R0317		0.217	5
	4	600095	S201M-K4NA	2CDS271103R0337		0.217	5
	6	600118	S201M-K6NA	2CDS271103R0377		0.217	5
	8	600149	S201M-K8NA	2CDS271103R0407		0.217	5
	10	600163	S201M-K10NA	2CDS271103R0427		0.217	5
	13	659437	S201M-K13NA	2CDS271103R0447		0.220	5
	16	600187	S201M-K16NA	2CDS271103R0467		0.220	5
	20	600200	S201M-K20NA	2CDS271103R0487		0.220	5
	25	600231	S201M-K25NA	2CDS271103R0517		0.225	5
	32	600255	S201M-K32NA	2CDS271103R0537		0.230	5
	40	600279	S201M-K40NA	2CDS271103R0557		0.230	5
	50	600293	S201M-K50NA	2CDS271103R0577		0.230	5
	63	600316	S201M-K63NA	2CDS271103R0607		0.230	5
3+NA	0.5	659444	S203M-K0.5NA	2CDS273103R0157		0.441	1
	1	650451	S203M-K1NA	2CDS273103R0217		0.441	1
	1.6	659468	S203M-K1.6NA	2CDS273103R0257		0.441	1
	2	659475	S203M-K2NA	2CDS273103R0277		0.441	1
	3	659482	S203M-K3NA	2CDS273103R0317		0.441	1
	4	659499	S203M-K4NA	2CDS273103R0337		0.441	1
	6	659505	S203M-K6NA	2CDS273103R0377		0.441	1
	8	659512	S203M-K8NA	2CDS273103R0407		0.441	1
	10	659529	S203M-K10NA	2CDS273103R0427		0.441	1
	13	659536	S203M-K13NA	2CDS273103R0447		0.450	1
	16	659543	S203M-K16NA	2CDS273103R0467		0.450	1
	20	659550	S203M-K20NA	2CDS273103R0487		0.450	1
	25	659567	S203M-K25NA	2CDS273103R0517		0.455	1
	32	659574	S203M-K32NA	2CDS273103R0537		0.470	1
	40	659581	S203M-K40NA	2CDS273103R0557		0.470	1
	50	659604	S203M-K50NA	2CDS273103R0577		0.470	1
	63	659611	S203M-K63NA	2CDS273103R0607		0.470	1

MCBs

S 200 series M-Z characteristic

S 201 M

S 202 M

S 200 M-Z characteristic
Function: protection and control of the electronic circuits against lower and long duration overloads and short-circuits.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=15 kA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	599443	S201M-Z0.5	2CDS271001R0158		0.112	10
	1	599481	S201M-Z1	2CDS271001R0218		0.112	10
	1.6	599511	S201M-Z1.6	2CDS271001R0258		0.112	10
	2	599535	S201M-Z2	2CDS271001R0278		0.112	10
	3	599559	S201M-Z3	2CDS271001R0318		0.112	10
	4	599580	S201M-Z4	2CDS271001R0338		0.112	10
	6	599603	S201M-Z6	2CDS271001R0378		0.112	10
	8	599634	S201M-Z8	2CDS271001R0408		0.112	10
	10	599658	S201M-Z10	2CDS271001R0428		0.112	10
	16	599672	S201M-Z16	2CDS271001R0468		0.115	10
	20	599696	S201M-Z20	2CDS271001R0488		0.115	10
	25	599726	S201M-Z25	2CDS271001R0518		0.115	10
	32	599740	S201M-Z32	2CDS271001R0538		0.120	10
	40	599764	S201M-Z40	2CDS271001R0558		0.120	10
	50	599788	S201M-Z50	2CDS271001R0578		0.120	10
	63	599801	S201M-Z63	2CDS271001R0608		0.120	10
2	0.5	600491	S202M-Z0.5	2CDS272001R0158		0.224	5
	1	600538	S202M-Z1	2CDS272001R0218		0.224	5
	1.6	600569	S202M-Z1.6	2CDS272001R0258		0.224	5
	2	600583	S202M-Z2	2CDS272001R0278		0.224	5
	3	600606	S202M-Z3	2CDS272001R0318		0.224	5
	4	600637	S202M-Z4	2CDS272001R0338		0.224	5
	6	600651	S202M-Z6	2CDS272001R0378		0.224	5
	8	600682	S202M-Z8	2CDS272001R0408		0.224	5
	10	600705	S202M-Z10	2CDS272001R0428		0.224	5
	16	600729	S202M-Z16	2CDS272001R0468		0.230	5
	20	600743	S202M-Z20	2CDS272001R0488		0.230	5
	25	600774	S202M-Z25	2CDS272001R0518		0.230	5
	32	600798	S202M-Z32	2CDS272001R0538		0.240	5
	40	600811	S202M-Z40	2CDS272001R0558		0.240	5
	50	600835	S202-MZ50	2CDS272001R0578		0.240	5
	63	600859	S202M-Z63	2CDS272001R0608		0.240	5

MCBs

S 200 series M-Z characteristic

S 203 M

S 204 M

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.5	601023	S203M-Z0.5	2CDS273001R0158		0.336	1
	1	601061	S203M-Z1	2CDS273001R0218		0.336	1
	1.6	601092	S203M-Z1.6	2CDS273001R0258		0.336	1
	2	601115	S203M-Z2	2CDS273001R0278		0.336	1
	3	601139	S203M-Z3	2CDS273001R0318		0.336	1
	4	601160	S203M-Z4	2CDS273001R0338		0.336	1
	6	601184	S203M-Z6	2CDS273001R0378		0.336	1
	8	601214	S203M-Z8	2CDS273001R0408		0.336	1
	10	601238	S203M-Z10	2CDS273001R0428		0.336	1
	16	601252	S203M-Z16	2CDS273001R0468		0.345	1
	20	601276	S203M-Z20	2CDS273001R0488		0.345	1
	25	601306	S203M-Z25	2CDS273001R0518		0.345	1
	32	601320	S203M-Z32	2CDS273001R0538		0.360	1
	40	601344	S203M-Z40	2CDS273001R0558		0.360	1
	50	601368	S203M-Z50	2CDS273001R0578		0.360	1
	63	601382	S203M-Z63	2CDS273001R0608		0.360	1
4	0.5	601764	S204M-Z0.5	2CDS274001R0158		0.448	1
	1	601810	S204M-Z1	2CDS274001R0218		0.448	1
	1.6	601832	S204M-Z1.6	2CDS274001R0258		0.448	1
	2	601856	S204M-Z2	2CDS274001R0278		0.448	1
	3	601870	S204M-Z3	2CDS274001R0318		0.448	1
	4	601900	S204M-Z4	2CDS274001R0338		0.448	1
	6	601924	S204M-Z6	2CDS274001R0378		0.448	1
	8	601955	S204M-Z8	2CDS274001R0408		0.448	1
	10	601979	S204M-Z10	2CDS274001R0428		0.448	1
	16	601993	S204M-Z16	2CDS274001R0468		0.460	1
	20	659628	S204M-Z20	2CDS274001R0488		0.460	1
	25	602037	S204M-Z25	2CDS274001R0518		0.460	1
	32	602051	S204M-Z32	2CDS274001R0538		0.480	1
	40	602075	S204M-Z40	2CDS274001R0558		0.480	1
	50	602099	S204M-Z50	2CDS274001R0578		0.480	1
	63	602112	S204M-Z63	2CDS274001R0608		0.480	1

*1 U_{Bmax} 125 V ⎓ with 2 poles connected in series

MCBs

S 200 series M-Z characteristic

S 201 M NA

S 203 M NA

With disconnecting neutral NA

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0.5	599962	S201M-Z0.5NA	2CDS271103R0158		0.217	5
	1	600002	S201M-Z1NA	2CDS271103R0218		0.217	5
	1.6	600033	S201M-Z1.6NA	2CDS271103R0258		0.217	5
	2	600057	S201M-Z2NA	2CDS271103R0278		0.217	5
	3	600071	S201M-Z3NA	2CDS271103R0318		0.217	5
	4	600101	S201M-Z4NA	2CDS271103R0338		0.217	5
	6	600125	S201M-Z6NA	2CDS271103R0378		0.217	5
	8	600156	S201M-Z8NA	2CDS271103R0408		0.217	5
	10	600170	S201M-Z10NA	2CDS271103R0428		0.217	5
	16	600194	S201M-Z16NA	2CDS271103R0468		0.220	5
	20	600217	S201M-Z20NA	2CDS271103R0488		0.220	5
	25	600248	S201M-Z25NA	2CDS271103R0518		0.225	5
	32	600262	S201M-Z32NA	2CDS271103R0538		0.230	5
	40	600286	S201M-Z40NA	2CDS271103R0558		0.230	5
	50	600309	S201M-Z50NA	2CDS271103R0578		0.230	5
	63	600323	S201M-Z63NA	2CDS271103R0608		0.230	5
3+NA	0.5	601474	S203M-Z0.5NA	2CDS273103R0158		0.441	1
	1	601481	S203M-Z1NA	2CDS273103R0218		0.441	1
	1.6	601498	S203M-Z1.6NA	2CDS273103R0258		0.441	1
	2	601504	S203M-Z2NA	2CDS273103R0278		0.441	1
	3	601511	S203M-Z3NA	2CDS273103R0318		0.441	1
	4	601528	S203M-Z4NA	2CDS273103R0338		0.441	1
	6	601535	S203M-Z6NA	2CDS273103R0378		0.441	1
	8	601542	S203M-Z8NA	2CDS273103R0408		0.441	1
	10	601559	S203M-Z10NA	2CDS273103R0428		0.441	1
	16	601566	S203M-Z16NA	2CDS273103R0468		0.450	1
	20	601573	S203M-Z20NA	2CDS273103R0488		0.450	1
	25	601580	S203M-Z25NA	2CDS273103R0518		0.455	1
	32	601597	S203M-Z32NA	2CDS273103R0538		0.470	1
	40	601603	S203M-Z40NA	2CDS273103R0558		0.470	1
	50	601610	S203M-Z50NA	2CDS273103R0578		0.470	1
	63	601627	S203M-Z63NA	2CDS273103R0608		0.470	1

MCBs

Supplementary protector S 200 MR series, 10kA

The S200 MR is a high-performance supplementary protector with ring cable lug connections conforming to UL 1077; CSA 22.2. No. 235 and IEC/EN 60947-2 standards.
The integrated captive connecting screws simplify the connection of electric lines, provides extra protection and saves time.

S 201 M

S 202 M

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.2	954181	S201MR-K0.2	2CDS271437R0087		0.112	10
	0.3	956697	S201MR-K0.3	2CDS271437R0117		0.112	10
	0.5	956710	S201MR-K0.5	2CDS271437R0157		0.112	10
	0.75	956734	S201MR-K0.75	2CDS271437R0187		0.112	10
	1	956758	S201MR-K1	2CDS271437R0217		0.112	10
	1.6	956772	S201MR-K1.6	2CDS271437R0257		0.112	10
	2	956796	S201MR-K2	2CDS271437R0277		0.112	10
	3	956819	S201MR-K3	2CDS271437R0317		0.112	10
	4	956833	S201MR-K4	2CDS271437R0337		0.112	10
	5	956857	S201MR-K5	2CDS271437R0357		0.112	10
	6	956871	S201MR-K6	2CDS271437R0377		0.112	10
	8	956895	S201MR-K8	2CDS271437R0407		0.112	10
	10	956918	S201MR-K10	2CDS271437R0427		0.112	10
	13	956932	S201MR-K13	2CDS271437R0447		0.115	10
	15	956956	S201MR-K15	2CDS271437R0457		0.115	10
	16	956970	S201MR-K16	2CDS271437R0467		0.115	10
	20	956994	S201MR-K20	2CDS271437R0487		0.115	10
	25	957014	S201MR-K25	2CDS271437R0517		0.115	10
	30	957038	S201MR-K30	2CDS271437R0527		0.120	10
	32	957052	S201MR-K32	2CDS271437R0537		0.120	10
	35	957076	S201MR-K35	2CDS271437R0547		0.120	10
	40	957090	S201MR-K40	2CDS271437R0557		0.120	10
	50	957113	S201MR-K50	2CDS271437R0577		0.120	10
	60	957137	S201MR-K60	2CDS271437R0587		0.120	10
	63	957151	S201MR-K63	2CDS271437R0607		0.120	10
2	0.2	957670	S202MR-K0.2	2CDS272437R0087		0.224	5
	0.3	957694	S202MR-K0.3	2CDS272437R0117		0.224	5
	0.5	957717	S202MR-K0.5	2CDS272437R0157		0.224	5
	0.75	957731	S202MR-K0.75	2CDS272437R0187		0.224	5
	1	957755	S202MR-K1	2CDS272437R0217		0.224	5
	1.6	957779	S202MR-K1.6	2CDS272437R0257		0.224	5
	2	957793	S202MR-K2	2CDS272437R0277		0.224	5
	3	957816	S202MR-K3	2CDS272437R0317		0.224	5
	4	957830	S202MR-K4	2CDS272437R0337		0.224	5
	5	957854	S202MR-K5	2CDS272437R0357		0.224	5
	6	957878	S202MR-K6	2CDS272437R0377		0.224	5
	8	957892	S202MR-K8	2CDS272437R0407		0.224	5
	10	957915	S202MR-K10	2CDS272437R0427		0.224	5
	13	957939	S202MR-K13	2CDS272437R0447		0.230	5
	15	957953	S202MR-K15	2CDS272437R0457		0.230	5
	16	957977	S202MR-K16	2CDS272437R0467		0.230	5
	20	957991	S202MR-K20	2CDS272437R0487		0.230	5
	25	958011	S202MR-K25	2CDS272437R0517		0.230	5
	30	958035	S202MR-K30	2CDS272437R0527		0.240	5
	32	958059	S202MR-K32	2CDS272437R0537		0.240	5
	35	958073	S202MR-K35	2CDS272437R0547		0.240	5
	40	958097	S202MR-K40	2CDS272437R0557		0.240	5
	50	958110	S202MR-K50	2CDS272437R0577		0.240	5
	60	958134	S202MR-K60	2CDS272437R0587		0.240	5
	63	958158	S202MR-K63	2CDS272437R0607		0.240	5

MCBs

Supplementary protector S 200 MR series, 10kA

S 203 M

S 204 M

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.2	958677	S203MR-K0.2	2CDS273437R0087		0.336	3
	0.3	958691	S203MR-K0.3	2CDS273437R0117		0.336	3
	0.5	958714	S203MR-K0.5	2CDS273437R0157		0.336	3
	0.75	958738	S203MR-K0.75	2CDS273437R0187		0.336	3
	1	958752	S203MR-K1	2CDS273437R0217		0.336	3
	1.6	958776	S203MR-K1.6	2CDS273437R0257		0.336	3
	2	958790	S203MR-K2	2CDS273437R0277		0.336	3
	3	958813	S203MR-K3	2CDS273437R0317		0.336	3
	4	958837	S203MR-K4	2CDS273437R0337		0.336	3
	5	958851	S203MR-K5	2CDS273437R0357		0.336	3
	6	958875	S203MR-K6	2CDS273437R0377		0.336	3
	8	958899	S203MR-K8	2CDS273437R0407		0.336	3
	10	958912	S203MR-K10	2CDS273437R0427		0.336	3
	13	958936	S203MR-K13	2CDS273437R0447		0.345	3
	15	958950	S203MR-K15	2CDS273437R0457		0.345	3
	16	958974	S203MR-K16	2CDS273437R0467		0.345	3
	20	958998	S203MR-K20	2CDS273437R0487		0.345	3
	25	959018	S203MR-K25	2CDS273437R0517		0.345	3
	30	959032	S203MR-K30	2CDS273437R0527		0.360	3
	32	959056	S203MR-K32	2CDS273437R0537		0.360	3
	35	959070	S203MR-K35	2CDS273437R0547		0.360	3
	40	959094	S203MR-K40	2CDS273437R0557		0.360	3
	50	959117	S203MR-K50	2CDS273437R0577		0.360	3
	60	959131	S203MR-K60	2CDS273437R0587		0.360	3
	63	959155	S203MR-K63	2CDS273437R0607		0.360	3
4	0.2	959674	S204MR-K0.2	2CDS274437R0087		0.448	2
	0.3	959698	S204MR-K0.3	2CDS274437R0117		0.448	2
	0.5	959711	S204MR-K0.5	2CDS274437R0157		0.448	2
	0.75	959735	S204MR-K0.75	2CDS274437R0187		0.448	2
	1	959759	S204MR-K1	2CDS274437R0217		0.448	2
	1.6	959773	S204MR-K1.6	2CDS274437R0257		0.448	2
	2	959797	S204MR-K2	2CDS274437R0277		0.448	2
	3	959810	S204MR-K3	2CDS274437R0317		0.448	2
	4	959834	S204MR-K4	2CDS274437R0337		0.448	2
	5	959858	S204MR-K5	2CDS274437R0357		0.448	2
	6	959872	S204MR-K6	2CDS274437R0377		0.448	2
	8	959896	S204MR-K8	2CDS274437R0407		0.448	2
	10	959919	S204MR-K10	2CDS274437R0427		0.448	2
	13	959933	S204MR-K13	2CDS274437R0447		0.460	2
	15	959957	S204MR-K15	2CDS274437R0457		0.460	2
	16	959971	S204MR-K16	2CDS274437R0467		0.460	2
	20	959995	S204MR-K20	2CDS274437R0487		0.460	2
	25	960014	S204MR-K25	2CDS274437R0517		0.460	2
	30	960038	S204MR-K30	2CDS274437R0527		0.480	2
	32	960052	S204MR-K32	2CDS274437R0537		0.480	2
	35	960076	S204MR-K35	2CDS274437R0547		0.480	2
	40	960090	S204MR-K40	2CDS274437R0557		0.480	2
	50	960113	S204MR-K50	2CDS274437R0577		0.480	2
	60	960137	S204MR-K60	2CDS274437R0587		0.480	2
	63	960151	S204MR-K63	2CDS274437R0607		0.480	2

MCBs

S 200 series M UC B characteristic
Universal current range

S 200 M UC B characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection for people and big length cables in TN and IT systems; version dedicated to application in direct current circuits for voltages up to 220 V DC 1 pole and 440 V DC 2, 3 and 4 poles.
Applications: Industrial.
Standard: IEC/EN 60898-2, IEC/EN 60947-2, UL1077, CSA 22.2 No. 235
(for DC applications, please note polarity of device)
Icu=10 kA

S 201 M UC

S 202 M UC

Number of poles	Rated current In A	Bbn 401361 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	6	4430596	S201M-B6UC	2CDS271061R0065		0.117	10
	10	4430602	S201M-B10UC	2CDS271061R0105		0.117	10
	13	4430619	S201M-B13UC	2CDS271061R0135		0.120	10
	16	4430626	S201M-B16UC	2CDS271061R0165		0.120	10
	20	4430633	S201M-B20UC	2CDS271061R0205		0.120	10
	25	4430640	S201M-B25UC	2CDS271061R0255		0.120	10
	32	4430657	S201M-B32UC	2CDS271061R0325		0.125	10
	40	4430664	S201M-B40UC	2CDS271061R0405		0.125	10
	50	4430671	S201M-B50UC	2CDS271061R0505		0.125	10
	63	4430688	S201M-B63UC	2CDS271061R0635		0.125	10
2	6	4432811	S202M-B6UC	2CDS272061R0065		0.234	5
	10	4432828	S202M-B10UC	2CDS272061R0105		0.234	5
	13	4432835	S202M-B13UC	2CDS272061R0135		0.240	5
	16	4432842	S202M-B16UC	2CDS272061R0165		0.240	5
	20	4432859	S202M-B20UC	2CDS272061R0205		0.240	5
	25	4432866	S202M-B25UC	2CDS272061R0255		0.240	5
	32	4432873	S202M-B32UC	2CDS272061R0325		0.250	5
	40	4432880	S202M-B40UC	2CDS272061R0405		0.250	5
	50	4432897	S202M-B50UC	2CDS272061R0505		0.250	5
	63	4432903	S202M-B63UC	2CDS272061R0635		0.250	5

MCBs

S 200 series M UC B characteristic

Universal current range

S 203 M UC

S 204 M UC

Number of poles	Rated current In A	Bbn 401361 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	6	4435034	S203M-B6UC	2CDS273061R0065		0.351	1
	10	4435041	S203M-B10UC	2CDS273061R0105		0.351	1
	13	4435058	S203M-B13UC	2CDS273061R0135		0.360	1
	16	4435065	S203M-B16UC	2CDS273061R0165		0.360	1
	20	4435072	S203M-B20UC	2CDS273061R0205		0.360	1
	25	4435089	S203M-B25UC	2CDS273061R0255		0.360	1
	32	4435096	S203M-B32UC	2CDS273061R0325		0.375	1
	40	4435102	S203M-B40UC	2CDS273061R0405		0.375	1
	50	4435119	S203M-B50UC	2CDS273061R0505		0.375	1
	63	4435126	S203M-B63UC	2CDS273061R0635		0.375	1
4	6	4437250	S204M-B6UC	2CDS274061R0065		0.468	1
	10	4437267	S204M-B10UC	2CDS274061R0105		0.468	1
	13	4437274	S204M-B13UC	2CDS274061R0135		0.480	1
	16	4437281	S204M-B16UC	2CDS274061R0165		0.480	1
	20	4437298	S204M-B20UC	2CDS274061R0205		0.480	1
	25	4437304	S204M-B25UC	2CDS274061R0255		0.480	1
	32	4437311	S204M-B32UC	2CDS274061R0325		0.500	1
	40	4437328	S204M-B40UC	2CDS274061R0405		0.500	1
	50	4437335	S204M-B50UC	2CDS274061R0505		0.500	1
	63	4437342	S204M-B63UC	2CDS274061R0635		0.500	1

MCBs

S 200 series M UC C characteristic
Universal current range

S 200 M UC C characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection for people and big length cables in TN and IT systems; version dedicated to application in direct current circuits for voltages up to 220 V DC 1 pole and 440 V DC 2, 3 and 4 poles.
Applications: Industrial.
Standard: IEC/EN 60898-2, IEC/EN 60947-2, UL1077, CSA 22.2 No. 235
(for DC applications, please note polarity of device)
Icu=10 kA

S 201 M UC

S 202 M UC

Number of poles	Rated current In A	Bbn 401361 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	4430695	S201M-C0.5UC	2CDS271061R0984		0.117	10
	1	4430701	S201M-C1UC	2CDS271061R0014		0.117	10
	1.6	4430718	S201M-C1.6UC	2CDS271061R0974		0.117	10
	2	4430725	S201M-C2UC	2CDS271061R0024		0.117	10
	3	4430732	S201M-C3UC	2CDS271061R0034		0.117	10
	4	4430749	S201M-C4UC	2CDS271061R0044		0.117	10
	6	4430756	S201M-C6UC	2CDS271061R0064		0.117	10
	8	4430763	S201M-C8UC	2CDS271061R0084		0.117	10
	10	4430770	S201M-C10UC	2CDS271061R0104		0.117	10
	13	4430787	S201M-C13UC	2CDS271061R0134		0.120	10
	16	4430794	S201M-C16UC	2CDS271061R0164		0.120	10
	20	4430800	S201M-C20UC	2CDS271061R0204		0.120	10
	25	4430817	S201M-C25UC	2CDS271061R0254		0.120	10
	32	4430824	S201M-C32UC	2CDS271061R0324		0.125	10
	40	4430831	S201M-C40UC	2CDS271061R0404		0.125	10
	50	4430848	S201M-C50UC	2CDS271061R0504		0.125	10
	63	4430855	S201M-C63UC	2CDS271061R0634		0.125	10
2	0.5	4432910	S202M-C0.5UC	2CDS272061R0984		0.234	5
	1	4432927	S202M-C1UC	2CDS272061R0014		0.234	5
	1.6	4432934	S202M-C1.6UC	2CDS272061R0974		0.234	5
	2	4432941	S202M-C2UC	2CDS272061R0024		0.234	5
	3	4432958	S202M-C3UC	2CDS272061R0034		0.234	5
	4	4432965	S202M-C4UC	2CDS272061R0044		0.234	5
	6	4432972	S202M-C6UC	2CDS272061R0064		0.234	5
	8	4432989	S202M-C8UC	2CDS272061R0084		0.234	5
	10	4432996	S202M-C10UC	2CDS272061R0104		0.234	5
	13	4433009	S202M-C13UC	2CDS272061R0134		0.240	5
	16	4433016	S202M-C16UC	2CDS272061R0164		0.240	5
	20	4433023	S202M-C20UC	2CDS272061R0204		0.240	5
	25	4433030	S202M-C25UC	2CDS272061R0254		0.240	5
	32	4433047	S202M-C32UC	2CDS272061R0324		0.250	5
	40	4433054	S202M-C40UC	2CDS272061R0404		0.250	5
	50	4433061	S202M-C50UC	2CDS272061R0504		0.250	5
	63	4433078	S202M-C63UC	2CDS272061R0634		0.250	5

MCBs

S 200 series M UC C characteristic
Universal current range

S 203 M UC

S 204 M UC

Number of poles	Rated current In A	Bbn 401361 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.5	4435133	S203M-C0.5UC	2CDS273061R0984		0.351	1
	1	4435140	S203M-C1UC	2CDS273061R0014		0.351	1
	1.6	4435157	S203M-C1.6UC	2CDS273061R0974		0.351	1
	2	4435164	S203M-C2UC	2CDS273061R0024		0.351	1
	3	4435171	S203M-C3UC	2CDS273061R0034		0.351	1
	4	4435188	S203M-C4UC	2CDS273061R0044		0.351	1
	6	4435195	S203M-C6UC	2CDS273061R0064		0.351	1
	8	4435201	S203M-C8UC	2CDS273061R0084		0.351	1
	10	4435218	S203M-C10UC	2CDS273061R0104		0.351	1
	13	4435225	S203M-C13UC	2CDS273061R0134		0.360	1
	16	4435232	S203M-C16UC	2CDS273061R0164		0.360	1
	20	4435249	S203M-C20UC	2CDS273061R0204		0.360	1
	25	4435256	S203M-C25UC	2CDS273061R0254		0.360	1
	32	4435263	S203M-C32UC	2CDS273061R0324		0.375	1
	40	4435270	S203M-C40UC	2CDS273061R0404		0.375	1
	50	4435287	S203M-C50UC	2CDS273061R0504		0.375	1
	63	4435294	S203M-C63UC	2CDS273061R0634		0.375	1
4	0.5	4437359	S204M-C0.5UC	2CDS274061R0984		0.468	1
	1	4437366	S204M-C1UC	2CDS274061R0014		0.468	1
	1.6	4437373	S204M-C1.6UC	2CDS274061R0974		0.468	1
	2	4437380	S204M-C2UC	2CDS274061R0024		0.468	1
	3	4437397	S204M-C3UC	2CDS274061R0034		0.468	1
	4	4437403	S204M-C4UC	2CDS274061R0044		0.468	1
	6	4437410	S204M-C6UC	2CDS274061R0064		0.468	1
	8	4437427	S204M-C8UC	2CDS274061R0084		0.468	1
	10	4437434	S204M-C10UC	2CDS274061R0104		0.468	1
	13	4437441	S204M-C13UC	2CDS274061R0134		0.480	1
	16	4437458	S204M-C16UC	2CDS274061R0164		0.480	1
	20	4437465	S204M-C20UC	2CDS274061R0204		0.480	1
	25	4437472	S204M-C25UC	2CDS274061R0254		0.480	1
	32	4437489	S204M-C32UC	2CDS274061R0324		0.500	1
	40	4437496	S204M-C40UC	2CDS274061R0404		0.500	1
	50	4437502	S204M-C50UC	2CDS274061R0504		0.500	1
	63	4437519	S204M-C63UC	2CDS274061R0634		0.500	1

MCBs

S 200 series M UC – Universal current range K characteristic

S 201 M UC

S 200 M UC K characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection for people and big length cables in TN and IT systems; version dedicated to application in direct current circuits for voltages up to 220 V DC 1 pole and 440 V DC 2, 3 and 4 poles.
Applications: Industrial.
Standard: IEC/EN 60947-2, UL1077, CSA 22.2 No. 235
(for DC applications, please note polarity of device)
Icu=10 kA

Number of poles	Rated current In A	Bbn 401361 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.2	4430862	S201M-K0.2UC	2CDS271061R0087		0.117	10
	0.3	4430879	S201M-K0.3UC	2CDS271061R0117		0.117	10
	0.5	4430886	S201M-K0.5UC	2CDS271061R0157		0.117	10
	0.75	4430893	S201M-K0.75UC	2CDS271061R0187		0.117	10
	1	4430909	S201M-K1UC	2CDS271061R0217		0.117	10
	1.6	4430916	S201M-K1.6UC	2CDS271061R0257		0.117	10
	2	4430923	S201M-K2UC	2CDS271061R0277		0.117	10
	3	4430930	S201M-K3UC	2CDS271061R0317		0.117	10
	4	4430947	S201M-K4UC	2CDS271061R0337		0.117	10
	5	4430954	S201M-K5UC	2CDS271061R0357		0.117	10
	6	4430961	S201M-K6UC	2CDS271061R0377		0.117	10
	8	4430978	S201M-K8UC	2CDS271061R0407		0.117	10
	10	4430985	S201M-K10UC	2CDS271061R0427		0.117	10
	13	4430992	S201M-K13UC	2CDS271061R0447		0.120	10
	15	4431005	S201M-K15UC	2CDS271061R0457		0.120	10
	16	4431012	S201M-K16UC	2CDS271061R0467		0.120	10
	20	4431029	S201M-K20UC	2CDS271061R0487		0.120	10
	25	4431036	S201M-K25UC	2CDS271061R0517		0.120	10
	30	4431043	S201M-K30UC	2CDS271061R0527		0.125	10
	32	4431050	S201M-K32UC	2CDS271061R0537		0.125	10
	35	4431067	S201M-K35UC	2CDS271061R0547		0.125	10
	40	4431074	S201M-K40UC	2CDS271061R0557		0.125	10
	50	4431081	S201M-K50UC	2CDS271061R0577		0.125	10
	60	4431098	S201M-K60UC	2CDS271061R0587		0.125	10
	63	4431104	S201M-K63UC	2CDS271061R0607		0.125	10

MCBs

S 200 series M UC – Universal current range K characteristic

S 202 M UC

S 203 M UC

Number of poles	Rated current In A	Bbn 401361 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
2	0.2	4433085	S202M-K0.2UC	2CDS272061R0087		0.234	5
	0.3	4433092	S202M-K0.3UC	2CDS272061R0117		0.234	5
	0.5	4433108	S202M-K0.5UC	2CDS272061R0157		0.234	5
	0.75	4433115	S202M-K0.75UC	2CDS272061R0187		0.234	5
	1	4433122	S202M-K1UC	2CDS272061R0217		0.234	5
	1.6	4433139	S202M-K1.6UC	2CDS272061R0257		0.234	5
	2	4433146	S202M-K2UC	2CDS272061R0277		0.234	5
	3	4433153	S202M-K3UC	2CDS272061R0317		0.234	5
	4	4433160	S202M-K4UC	2CDS272061R0337		0.234	5
	5	4433177	S202M-K5UC	2CDS272061R0357		0.234	5
	6	4433184	S202M-K6UC	2CDS272061R0377		0.234	5
	8	4433191	S202M-K8UC	2CDS272061R0407		0.234	5
	10	4433207	S202M-K10UC	2CDS272061R0427		0.234	5
	13	4433214	S202M-K13UC	2CDS272061R0447		0.240	5
	15	4433221	S202M-K15UC	2CDS272061R0457		0.240	5
	16	4433238	S202M-K16UC	2CDS272061R0467		0.240	5
	20	4433245	S202M-K20UC	2CDS272061R0487		0.240	5
	25	4433252	S202M-K25UC	2CDS272061R0517		0.240	5
	30	4433269	S202M-K30UC	2CDS272061R0527		0.250	5
	32	4433276	S202M-K32UC	2CDS272061R0537		0.250	5
	35	4433283	S202M-K35UC	2CDS272061R0547		0.250	5
	40	4433290	S202M-K40UC	2CDS272061R0557		0.250	5
	50	4433306	S202M-K50UC	2CDS272061R0577		0.250	5
	60	4433313	S202M-K60UC	2CDS272061R0587		0.250	5
	63	4433320	S202M-K63UC	2CDS272061R0607		0.250	5
3	0.2	4435300	S203M-K0.2UC	2CDS273061R0087		0.351	1
	0.3	4435317	S203M-K0.3UC	2CDS273061R0117		0.351	1
	0.5	4435324	S203M-K0.5UC	2CDS273061R0157		0.351	1
	0.75	4435331	S203M-K0.75UC	2CDS273061R0187		0.351	1
	1	4435348	S203M-K1UC	2CDS273061R0217		0.351	1
	1.6	4435355	S203M-K1.6UC	2CDS273061R0257		0.351	1
	2	4435362	S203M-K2UC	2CDS273061R0277		0.351	1
	3	4435379	S203M-K3UC	2CDS273061R0317		0.351	1
	4	4435386	S203M-K4UC	2CDS273061R0337		0.351	1
	5	4435393	S203M-K5UC	2CDS273061R0357		0.351	1
	6	4435409	S203M-K6UC	2CDS273061R0377		0.351	1
	8	4435416	S203M-K8UC	2CDS273061R0407		0.351	1
	10	4435423	S203M-K10UC	2CDS273061R0427		0.351	1
	13	4435430	S203M-K13UC	2CDS273061R0447		0.360	1
	15	4435447	S203M-K15UC	2CDS273061R0457		0.360	1
	16	4435454	S203M-K16UC	2CDS273061R0467		0.360	1
	20	4435461	S203M-K20UC	2CDS273061R0487		0.360	1
	25	4435478	S203M-K25UC	2CDS273061R0517		0.360	1
	30	4435485	S203M-K30UC	2CDS273061R0527		0.375	1
	32	4435492	S203M-K32UC	2CDS273061R0537		0.375	1
	35	4435508	S203M-K35UC	2CDS273061R0547		0.375	1
	40	4435515	S203M-K40UC	2CDS273061R0557		0.375	1
	50	4435522	S203M-K50UC	2CDS273061R0577		0.375	1
	60	4435539	S203M-K60UC	2CDS273061R0587		0.375	1
	63	4435546	S203M-K63UC	2CDS273061R0607		0.375	1

MCBs

S 200 series M UC – Universal current range K characteristic

S 204 M UC

Number of poles	Rated current In A	Bbn 401361 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
4	0.2	4437526	S204M-K0.2UC	2CDS274061R0087		0.468	1
	0.3	4437533	S204M-K0.3UC	2CDS274061R0117		0.468	1
	0.5	4437540	S204M-K0.5UC	2CDS274061R0157		0.468	1
	0.75	4437557	S204M-K0.75UC	2CDS274061R0187		0.468	1
	1	4437564	S204M-K1UC	2CDS274061R0217		0.468	1
	1.6	4437571	S204M-K1.6UC	2CDS274061R0257		0.468	1
	2	4437588	S204M-K2UC	2CDS274061R0277		0.468	1
	3	4437595	S204M-K3UC	2CDS274061R0317		0.468	1
	4	4437601	S204M-K4UC	2CDS274061R0337		0.468	1
	5	4437618	S204M-K5UC	2CDS274061R0357		0.468	1
	6	4437625	S204M-K6UC	2CDS274061R0377		0.468	1
	8	4437632	S204M-K8UC	2CDS274061R0407		0.468	1
	10	4437649	S204M-K10UC	2CDS274061R0427		0.468	1
	13	4437656	S204M-K13UC	2CDS274061R0447		0.480	1
	15	4437663	S204M-K15UC	2CDS274061R0457		0.480	1
	16	4437670	S204M-K16UC	2CDS274061R0467		0.480	1
	20	4437687	S204M-K20UC	2CDS274061R0487		0.480	1
	25	4437694	S204M-K25UC	2CDS274061R0517		0.480	1
	30	4437700	S204M-K30UC	2CDS274061R0527		0.500	1
	32	4437717	S204M-K32UC	2CDS274061R0537		0.500	1
	35	4437724	S204M-K35UC	2CDS274061R0547		0.500	1
	40	4437731	S204M-K40UC	2CDS274061R0557		0.500	1
	50	4437748	S204M-K50UC	2CDS274061R0577		0.500	1
	60	4437755	S204M-K60UC	2CDS274061R0587		0.500	1
	63	4437762	S204M-K63UC	2CDS274061R0607		0.500	1

MCBs

S 200 series M UC – Universal current range Z characteristic

S 201 M UC

S 202 M UC

S 200 M UC Z characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection for people and big length cables in TN and IT systems; version dedicated to application in direct current circuits for voltages up to 220 V DC 1 pole and 440 V DC 2, 3 and 4 poles.
Applications: Industrial.
Standard: IEC/EN 60947-2, UL1077, CSA 22.2 No. 235
(for DC applications, please note polarity of device)
Icu=10 kA

Number of poles	Rated current In A	Bbn 401361 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	4431111	S201M-Z0.5UC	2CDS271061R0158		0.117	1
	1	4431128	S201M-Z1UC	2CDS271061R0218		0.117	1
	1.6	4431135	S201M-Z1.6UC	2CDS271061R0258		0.117	1
	2	4431142	S201M-Z2UC	2CDS271061R0278		0.117	1
	3	4431159	S201M-Z3UC	2CDS271061R0318		0.117	1
	4	4431166	S201M-Z4UC	2CDS271061R0338		0.117	1
	5	4431173	S201M-Z5UC	2CDS271061R0358		0.117	1
	6	4431180	S201M-Z6UC	2CDS271061R0378		0.117	1
	8	4431197	S201M-Z8UC	2CDS271061R0408		0.117	1
	10	4431203	S201M-Z10UC	2CDS271061R0428		0.117	1
	15	4431227	S201M-Z15UC	2CDS271061R0458		0.120	1
	16	4431234	S201M-Z16UC	2CDS271061R0468		0.120	1
	20	4431241	S201M-Z20UC	2CDS271061R0488		0.120	1
	25	4431258	S201M-Z25UC	2CDS271061R0518		0.120	1
	30	4431265	S201M-Z30UC	2CDS271061R0528		0.125	1
	32	4431272	S201M-Z32UC	2CDS271061R0538		0.125	1
	35	4431289	S201M-Z35UC	2CDS271061R0548		0.125	1
	40	4431296	S201M-Z40UC	2CDS271061R0558		0.125	1
	50	4431302	S201M-Z50UC	2CDS271061R0578		0.125	1
	60	4431319	S201M-Z60UC	2CDS271061R0588		0.125	1
	63	4431326	S201M-Z63UC	2CDS271061R0608		0.125	1
2	0.5	4433337	S202M-Z0.5UC	2CDS272061R0158		0.234	5
	1	4433344	S202M-Z1UC	2CDS272061R0218		0.234	5
	1.6	4433351	S202M-Z1.6UC	2CDS272061R0258		0.234	5
	2	4433368	S202M-Z2UC	2CDS272061R0278		0.234	5
	3	4433375	S202M-Z3UC	2CDS272061R0318		0.234	5
	4	4433382	S202M-Z4UC	2CDS272061R0338		0.234	5
	5	4433399	S202M-Z5UC	2CDS272061R0358		0.234	5
	6	4433405	S202M-Z6UC	2CDS272061R0378		0.234	5
	8	4433412	S202M-Z8UC	2CDS272061R0408		0.234	5
	10	4433429	S202M-Z10UC	2CDS272061R0428		0.234	5
	15	4433443	S202M-Z15UC	2CDS272061R0458		0.240	5
	16	4433450	S202M-Z16UC	2CDS272061R0468		0.240	5
	20	4433467	S202M-Z20UC	2CDS272061R0488		0.240	5
	25	4433474	S202M-Z25UC	2CDS272061R0518		0.240	5
	30	4433481	S202M-Z30UC	2CDS272061R0528		0.250	5
	32	4433498	S202M-Z32UC	2CDS272061R0538		0.250	5
	35	4433504	S202M-Z35UC	2CDS272061R0548		0.250	5
	40	4433511	S202M-Z40UC	2CDS272061R0558		0.250	5
	50	4433528	S202M-Z50UC	2CDS272061R0578		0.250	5
	60	4433535	S202M-Z60UC	2CDS272061R0588		0.250	5
	63	4433542	S202M-Z63UC	2CDS272061R0608		0.250	5

MCBs

S 200 series M UC – Universal current range Z characteristic

S 203 M UC

S 204 M UC

Number of poles	Rated current In A	Bbn 401361 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.5	4435553	S203M-Z0.5UC	2CDS273061R0158		0.351	1
	1	4435560	S203M-Z1UC	2CDS273061R0218		0.351	1
	1.6	4435577	S203M-Z1.6UC	2CDS273061R0258		0.351	1
	2	4435584	S203M-Z2UC	2CDS273061R0278		0.351	1
	3	4435591	S203M-Z3UC	2CDS273061R0318		0.351	1
	4	4435607	S203M-Z4UC	2CDS273061R0338		0.351	1
	5	4435614	S203M-Z5UC	2CDS273061R0358		0.351	1
	6	4435621	S203M-Z6UC	2CDS273061R0378		0.351	1
	8	4435638	S203M-Z8UC	2CDS273061R0408		0.351	1
	10	4435645	S203M-Z10UC	2CDS273061R0428		0.351	1
	15	4435669	S203M-Z15UC	2CDS273061R0458		0.360	1
	16	4435676	S203M-Z16UC	2CDS273061R0468		0.360	1
	20	4435683	S203M-Z20UC	2CDS273061R0488		0.360	1
	25	4435690	S203M-Z25UC	2CDS273061R0518		0.360	1
	30	4435706	S203M-Z30UC	2CDS273061R0528		0.375	1
	32	4435713	S203M-Z32UC	2CDS273061R0538		0.375	1
	35	4435720	S203M-Z35UC	2CDS273061R0548		0.375	1
	40	4435737	S203M-Z40UC	2CDS273061R0558		0.375	1
	50	4435744	S203M-Z50UC	2CDS273061R0578		0.375	1
	60	4435751	S203M-Z60UC	2CDS273061R0588		0.375	1
	63	4435768	S203M-Z63UC	2CDS273061R0608		0.375	1
4	0.5	4437779	S204M-Z0.5UC	2CDS274061R0158		0.468	1
	1	4437786	S204M-Z1UC	2CDS274061R0218		0.468	1
	1.6	4437793	S204M-Z1.6UC	2CDS274061R0258		0.468	1
	2	4437809	S204M-Z2UC	2CDS274061R0278		0.468	1
	3	4437816	S204M-Z3UC	2CDS274061R0318		0.468	1
	4	4437823	S204M-Z4UC	2CDS274061R0338		0.468	1
	5	4437830	S204M-Z5UC	2CDS274061R0358		0.468	1
	6	4437847	S204M-Z6UC	2CDS274061R0378		0.468	1
	8	4437854	S204M-Z8UC	2CDS274061R0408		0.468	1
	10	4437861	S204M-Z10UC	2CDS274061R0428		0.468	1
	15	4437885	S204M-Z15UC	2CDS274061R0458		0.480	1
	16	4437892	S204M-Z16UC	2CDS274061R0468		0.480	1
	20	4437908	S204M-Z20UC	2CDS274061R0488		0.480	1
	25	4437915	S204M-Z25UC	2CDS274061R0518		0.480	1
	30	4437922	S204M-Z30UC	2CDS274061R0528		0.500	1
	32	4437939	S204M-Z32UC	2CDS274061R0538		0.500	1
	35	4437946	S204M-Z35UC	2CDS274061R0548		0.500	1
	40	4437953	S204M-Z40UC	2CDS274061R0558		0.500	1
	50	4437960	S204M-Z50UC	2CDS274061R0578		0.500	1
	60	4437977	S204M-Z60UC	2CDS274061R0588		0.500	1
	63	4437984	S204M-Z63UC	2CDS274061R0608		0.500	1

MCBs

S 300 series P-B characteristic

S 301 P

S 302 P

S 303 P

S 300 P-B characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection for people and large length of cables in TN and IT systems.
Applications: commercial and industrial.
Standard: IEC/EN 60898-1, IEC/EN 60947-2
Icu=25 kA; 100 kA (≤6 A)
Icn=25 kA (≤25 A); 20 kA (32-40 A); 15 kA (>40 A);

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	6	9080583	S301P-B6	2CDS381001R0065		0.120	10
	8	9086011	S301P-B8	2CDS381001R0085		0.120	10
	10	9080521	S301P-B10	2CDS381001R0105		0.120	10
	13	9080484	S301P-B13	2CDS381001R0135		0.123	10
	16	9080439	S301P-B16	2CDS381001R0165		0.123	10
	20	9080392	S301P-B20	2CDS381001R0205		0.123	10
	25	9080347	S301P-B25	2CDS381001R0255		0.123	10
	32	9080255	S301P-B32	2CDS381001R0325		0.128	10
	40	9080187	S301P-B40	2CDS381001R0405		0.128	10
	50	9080064	S301P-B50	2CDS381001R0505		0.128	10
	63	9079938	S301P-B63	2CDS381001R0635		0.128	10
2	6	9078993	S302P-B6	2CDS382001R0065		0.240	5
	8	9086059	S302P-B8	2CDS382001R0085		0.240	5
	10	9078931	S302P-B10	2CDS382001R0105		0.240	5
	13	9078894	S302P-B13	2CDS382001R0135		0.246	5
	16	9078849	S302P-B16	2CDS382001R0165		0.246	5
	20	9078801	S302P-B20	2CDS382001R0205		0.246	5
	25	9078757	S302P-B25	2CDS382001R0255		0.246	5
	32	9078665	S302P-B32	2CDS382001R0325		0.256	5
	40	9078597	S302P-B40	2CDS382001R0405		0.256	5
	50	9078474	S302P-B50	2CDS382001R0505		0.256	5
	63	9078344	S302P-B63	2CDS382001R0635		0.256	5
3	6	9078191	S303P-B6	2CDS383001R0065		0.360	1
	8	9086073	S303P-B8	2CDS383001R0085		0.360	1
	10	9078139	S303P-B10	2CDS383001R0105		0.360	1
	13	9078092	S303P-B13	2CDS383001R0135		0.369	1
	16	9078047	S303P-B16	2CDS383001R0165		0.369	1
	20	9078009	S303P-B20	2CDS383001R0205		0.369	1
	25	9077958	S303P-B25	2CDS383001R0255		0.369	1
	32	9077866	S303P-B32	2CDS383001R0325		0.384	1
	40	9077798	S303P-B40	2CDS383001R0405		0.384	1
	50	9077675	S303P-B50	2CDS383001R0505		0.384	1
	63	9077545	S303P-B63	2CDS383001R0635		0.384	1

MCBs

S 300 series P-B characteristic

S 304 P

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
4	6	9076593	S304P-B6	2CDS384001R0065		0.480	1
	8	9086110	S304P-B8	2CDS384001R0085		0.480	1
	10	9076531	S304P-B10	2CDS384001R0105		0.480	1
	13	9076494	S304P-B13	2CDS384001R0135		0.492	1
	16	9076449	S304P-B16	2CDS384001R0165		0.492	1
	20	9135559	S304P-B20	2CDS384001R0205		0.492	1
	25	9076357	S304P-B25	2CDS384001R0255		0.492	1
	32	9076265	S304P-B32	2CDS384001R0325		0.512	1
	40	9076197	S304P-B40	2CDS384001R0405		0.512	1
	50	9076074	S304P-B50	2CDS384001R0505		0.512	1
	63	9075947	S304P-B63	2CDS384001R0635		0.512	1

With disconnecting neutral NA

S 301 P NA

S 303 P NA

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	6	9079785	S301P-B6NA	2CDS381103R0065		0.233	5
	8	9086035	S301P-B8NA	2CDS381103R0085		0.233	5
	10	9079730	S301P-B10NA	2CDS381103R0105		0.233	5
	13	9079693	S301P-B13NA	2CDS381103R0135		0.236	5
	16	9079648	S301P-B16NA	2CDS381103R0165		0.236	5
	20	9079600	S301P-B20NA	2CDS381103R0205		0.236	5
	25	9079556	S301P-B25NA	2CDS381103R0255		0.241	5
	32	9079464	S301P-B32NA	2CDS381103R0325		0.246	5
	40	9079396	S301P-B40NA	2CDS381103R0405		0.246	5
	50	9079273	S301P-B50NA	2CDS381103R0505		0.246	5
	63	9079143	S301P-B63NA	2CDS381103R0635		0.246	5
3+NA	6	9077392	S303P-B6NA	2CDS383103R0065		0.473	1
	8	9086097	S303P-B8NA	2CDS383103R0085		0.473	1
	10	9077330	S303P-B10NA	2CDS383103R0105		0.473	1
	13	9077293	S303P-B13NA	2CDS383103R0135		0.482	1
	16	9077248	S303P-B16NA	2CDS383103R0165		0.482	1
	20	9135641	S303P-B20NA	2CDS383103R0205		0.482	1
	25	9077156	S303P-B25NA	2CDS383103R0255		0.487	1
	32	9077064	S303P-B32NA	2CDS383103R0325		0.502	1
	40	9076999	S303P-B40NA	2CDS383103R0405		0.502	1
	50	9076876	S303P-B50NA	2CDS383103R0505		0.502	1
	63	9076746	S303P-B63NA	2CDS383103R0635		0.502	1

MCBs

S 300 series P-C characteristic

S 301 P

S 302 P

S 300 P-C characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection for people and large length of cables in TN and IT systems.
Applications: commercial and industrial.
Standard: IEC/EN 60898-1, IEC/EN 60947-2
Icu=25 kA; 100 kA (≤6 A)
Icn=25 kA (≤25 A); 20 kA (32-40 A); 15 kA (>40 A);

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0,5	9079891	S301P-C0,5	2CDS381001R0984		0.120	10
	1	9080675	S301P-C1	2CDS381001R0014		0.120	10
	1,6	9079914	S301P-C1,6	2CDS381001R0974		0.120	10
	2	9080651	S301P-C2	2CDS381001R0024		0.120	10
	3	9080637	S301P-C3	2CDS381001R0034		0.120	10
	4	9080613	S301P-C4	2CDS381001R0044		0.120	10
	6	9080590	S301P-C6	2CDS381001R0064		0.120	10
	8	9080569	S301P-C8	2CDS381001R0084		0.120	10
	10	9080538	S301P-C10	2CDS381001R0104		0.120	10
	13	9080491	S301P-C13	2CDS381001R0134		0.123	10
	16	9080446	S301P-C16	2CDS381001R0164		0.123	10
	20	9080408	S301P-C20	2CDS381001R0204		0.123	10
	25	9080354	S301P-C25	2CDS381001R0254		0.123	10
	32	9080262	S301P-C32	2CDS381001R0324		0.128	10
	40	9080194	S301P-C40	2CDS381001R0404		0.128	10
	50	9080071	S301P-C50	2CDS381001R0504		0.128	10
	63	9079945	S301P-C63	2CDS381001R0634		0.128	10
2	0,5	9078306	S302P-C0,5	2CDS382001R0984		0.240	5
	1	9079082	S302P-C1	2CDS382001R0014		0.240	5
	1,6	9078320	S302P-C1,6	2CDS382001R0974		0.240	5
	2	9079068	S302P-C2	2CDS382001R0024		0.240	5
	3	9079044	S302P-C3	2CDS382001R0034		0.240	5
	4	9079020	S302P-C4	2CDS382001R0044		0.240	5
	6	9079006	S302P-C6	2CDS382001R0064		0.240	5
	8	9078979	S302P-C8	2CDS382001R0084		0.240	5
	10	9078948	S302P-C10	2CDS382001R0104		0.240	5
	13	9078900	S302P-C13	2CDS382001R0134		0.246	5
	16	9078856	S302P-C16	2CDS382001R0164		0.246	5
	20	9078818	S302P-C20	2CDS382001R0204		0.246	5
	25	9078764	S302P-C25	2CDS382001R0254		0.246	5
	32	9078672	S302P-C32	2CDS382001R0324		0.256	5
	40	9078603	S302P-C40	2CDS382001R0404		0.256	5
	50	9078481	S302P-C50	2CDS382001R0504		0.256	5
	63	9078351	S302P-C63	2CDS382001R0634		0.256	5

MCBs

S 300 series P-C characteristic

S 303 P

S 304 P

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0,5	9077507	S303P-C0,5	2CDS383001R0984		0.360	1
	1	9078283	S303P-C1	2CDS383001R0014		0.360	1
	1,6	9077521	S303P-C1,6	2CDS383001R0974		0.360	1
	2	9078269	S303P-C2	2CDS383001R0024		0.360	1
	3	9078245	S303P-C3	2CDS383001R0034		0.360	1
	4	9078221	S303P-C4	2CDS383001R0044		0.360	1
	6	9078207	S303P-C6	2CDS383001R0064		0.360	1
	8	9078177	S303P-C8	2CDS383001R0084		0.360	1
	10	9078146	S303P-C10	2CDS383001R0104		0.360	1
	13	9078108	S303P-C13	2CDS383001R0134		0.369	1
	16	9078054	S303P-C16	2CDS383001R0164		0.369	1
	20	9078016	S303P-C20	2CDS383001R0204		0.369	1
	25	9077965	S303P-C25	2CDS383001R0254		0.369	1
	32	9077873	S303P-C32	2CDS383001R0324		0.384	1
	40	9077804	S303P-C40	2CDS383001R0404		0.384	1
	50	9077682	S303P-C50	2CDS383001R0504		0.384	1
	63	9077552	S303P-C63	2CDS383001R0634		0.384	1
4	0,5	9135511	S304P-C0,5	2CDS384001R0984		0.480	1
	1	9076685	S304P-C1	2CDS384001R0014		0.480	1
	1,6	9075923	S304P-C1,6	2CDS384001R0974		0.480	1
	2	9076661	S304P-C2	2CDS384001R0024		0.480	1
	3	9076647	S304P-C3	2CDS384001R0034		0.480	1
	4	9076623	S304P-C4	2CDS384001R0044		0.480	1
	6	9135573	S304P-C6	2CDS384001R0064		0.480	1
	8	9076579	S304P-C8	2CDS384001R0084		0.480	1
	10	9076548	S304P-C10	2CDS384001R0104		0.480	1
	13	9135566	S304P-C13	2CDS384001R0134		0.492	1
	16	9076456	S304P-C16	2CDS384001R0164		0.492	1
	20	9076418	S304P-C20	2CDS384001R0204		0.492	1
	25	9076364	S304P-C25	2CDS384001R0254		0.492	1
	32	9076272	S304P-C32	2CDS384001R0324		0.512	1
	40	9135689	S304P-C40	2CDS384001R0404		0.512	1
	50	9076081	S304P-C50	2CDS384001R0504		0.512	1
	63	9075954	S304P-C63	2CDS384001R0634		0.512	1

MCBs

S 300 series P-C characteristic

S 301 P NA

S 303 P NA

With disconnecting neutral NA

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0,5	9079105	S301P-C0,5NA	2CDS381103R0984		0.233	5
	1	9079877	S301P-C1NA	2CDS381103R0014		0.233	5
	1,6	9079129	S301P-C1,6NA	2CDS381103R0974		0.233	5
	2	9079853	S301P-C2NA	2CDS381103R0024		0.233	5
	3	9079839	S301P-C3NA	2CDS381103R0034		0.233	5
	4	9079815	S301P-C4NA	2CDS381103R0044		0.233	5
	6	9079792	S301P-C6NA	2CDS381103R0064		0.233	5
	8	9079778	S301P-C8NA	2CDS381103R0084		0.233	5
	10	9079747	S301P-C10NA	2CDS381103R0104		0.233	5
	13	9079709	S301P-C13NA	2CDS381103R0134		0.236	5
	16	9079655	S301P-C16NA	2CDS381103R0164		0.236	5
	20	9079617	S301P-C20NA	2CDS381103R0204		0.236	5
	25	9079563	S301P-C25NA	2CDS381103R0254		0.241	5
	32	9079471	S301P-C32NA	2CDS381103R0324		0.246	5
	40	9079402	S301P-C40NA	2CDS381103R0404		0.246	5
	50	9079280	S301P-C50NA	2CDS381103R0504		0.246	5
	63	9079150	S301P-C63NA	2CDS381103R0634		0.246	5
3+NA	0,5	9135580	S303P-C0,5NA	2CDS383103R0984		0.473	1
	1	9077484	S303P-C1NA	2CDS383103R0014		0.473	1
	1,6	9076722	S303P-C1,6NA	2CDS383103R0974		0.473	1
	2	9077460	S303P-C2NA	2CDS383103R0024		0.473	1
	3	9077446	S303P-C3NA	2CDS383103R0034		0.473	1
	4	9077422	S303P-C4NA	2CDS383103R0044		0.473	1
	6	9077408	S303P-C6NA	2CDS383103R0064		0.473	1
	8	9077378	S303P-C8NA	2CDS383103R0084		0.473	1
	10	9077347	S303P-C10NA	2CDS383103R0104		0.473	1
	13	9135658	S303P-C13NA	2CDS383103R0134		0.482	1
	16	9077255	S303P-C16NA	2CDS383103R0164		0.482	1
	20	9077217	S303P-C20NA	2CDS383103R0204		0.482	1
	25	9077163	S303P-C25NA	2CDS383103R0254		0.487	1
	32	9077071	S303P-C32NA	2CDS383103R0324		0.502	1
	40	9135627	S303P-C40NA	2CDS383103R0404		0.502	1
	50	9076883	S303P-C50NA	2CDS383103R0504		0.502	1
	63	9076753	S303P-C63NA	2CDS383103R0634		0.502	1

MCBs

S 300 series P-D characteristic

S 300 P-D characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection for people and large length of cables in TN and IT systems.
Applications: commercial and industrial.
Standard: IEC/EN 60898-1, IEC/EN 60947-2
Icu=25 kA; 100 kA (≤6 A)
Icn=25 kA (≤25 A); 20 kA (32-40 A); 15 kA (>40 A);

S 301 P

S 302 P

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0,5	9079907	S301P-D0,5	2CDS381001R0981		0.120	10
	1	9080682	S301P-D1	2CDS381001R0011		0.120	10
	1,6	9079921	S301P-D1,6	2CDS381001R0971		0.120	10
	2	9080668	S301P-D2	2CDS381001R0021		0.120	10
	3	9080644	S301P-D3	2CDS381001R0031		0.120	10
	4	9080620	S301P-D4	2CDS381001R0041		0.120	10
	6	9080606	S301P-D6	2CDS381001R0061		0.120	10
	8	9080576	S301P-D8	2CDS381001R0081		0.120	10
	10	9080545	S301P-D10	2CDS381001R0101		0.120	10
	13	9080507	S301P-D13	2CDS381001R0131		0.123	10
	16	9080453	S301P-D16	2CDS381001R0161		0.123	10
	20	9080415	S301P-D20	2CDS381001R0201		0.123	10
	25	9080361	S301P-D25	2CDS381001R0251		0.123	10
	32	9080279	S301P-D32	2CDS381001R0321		0.128	10
	40	9080200	S301P-D40	2CDS381001R0401		0.128	10
	50	9080088	S301P-D50	2CDS381001R0501		0.128	10
	63	9079952	S301P-D63	2CDS381001R0631		0.128	10
2	0,5	9078313	S302P-D0,5	2CDS382001R0981		0.240	5
	1	9079099	S302P-D1	2CDS382001R0011		0.240	5
	1,6	9078337	S302P-D1,6	2CDS382001R0971		0.240	5
	2	9079075	S302P-D2	2CDS382001R0021		0.240	5
	3	9079051	S302P-D3	2CDS382001R0031		0.240	5
	4	9079037	S302P-D4	2CDS382001R0041		0.240	5
	6	9079013	S302P-D6	2CDS382001R0061		0.240	5
	8	9078986	S302P-D8	2CDS382001R0081		0.240	5
	10	9078955	S302P-D10	2CDS382001R0101		0.240	5
	13	9078917	S302P-D13	2CDS382001R0131		0.246	5
	16	9078863	S302P-D16	2CDS382001R0161		0.246	5
	20	9078825	S302P-D20	2CDS382001R0201		0.246	5
	25	9078771	S302P-D25	2CDS382001R0251		0.246	5
	32	9078689	S302P-D32	2CDS382001R0321		0.256	5
	40	9078610	S302P-D40	2CDS382001R0401		0.256	5
	50	9078498	S302P-D50	2CDS382001R0501		0.256	5
	63	9078368	S302P-D63	2CDS382001R0631		0.256	5

MCBs

S 300 series P-D characteristic

S 303 P

S 304 P

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0,5	9077514	S303P-D0,5	2CDS383001R0981		0.360	1
	1	9078290	S303P-D1	2CDS383001R0011		0.360	1
	1,6	9077538	S303P-D1,6	2CDS383001R0971		0.360	1
	2	9078276	S303P-D2	2CDS383001R0021		0.360	1
	3	9078252	S303P-D3	2CDS383001R0031		0.360	1
	4	9078238	S303P-D4	2CDS383001R0041		0.360	1
	6	9078214	S303P-D6	2CDS383001R0061		0.360	1
	8	9078184	S303P-D8	2CDS383001R0081		0.360	1
	10	9078153	S303P-D10	2CDS383001R0101		0.360	1
	13	9078115	S303P-D13	2CDS383001R0131		0.369	1
	16	9078061	S303P-D16	2CDS383001R0161		0.369	1
	20	9078023	S303P-D20	2CDS383001R0201		0.369	1
	25	9077972	S303P-D25	2CDS383001R0251		0.369	1
	32	9077880	S303P-D32	2CDS383001R0321		0.384	1
	40	9077811	S303P-D40	2CDS383001R0401		0.384	1
	50	9077699	S303P-D50	2CDS383001R0501		0.384	1
	63	9077569	S303P-D63	2CDS383001R0631		0.384	1
4	0,5	9075916	S304P-D0,5	2CDS384001R0981		0.480	1
	1	9076692	S304P-D1	2CDS384001R0011		0.480	1
	1,6	9075930	S304P-D1,6	2CDS384001R0971		0.480	1
	2	9076678	S304P-D2	2CDS384001R0021		0.480	1
	3	9076654	S304P-D3	2CDS384001R0031		0.480	1
	4	9076630	S304P-D4	2CDS384001R0041		0.480	1
	6	9076616	S304P-D6	2CDS384001R0061		0.480	1
	8	9076586	S304P-D8	2CDS384001R0081		0.480	1
	10	9076555	S304P-D10	2CDS384001R0101		0.480	1
	13	9076517	S304P-D13	2CDS384001R0131		0.492	1
	16	9076463	S304P-D16	2CDS384001R0161		0.492	1
	20	9076425	S304P-D20	2CDS384001R0201		0.492	1
	25	9076371	S304P-D25	2CDS384001R0251		0.492	1
	32	9076289	S304P-D32	2CDS384001R0321		0.512	1
	40	9076210	S304P-D40	2CDS384001R0401		0.512	1
	50	9076098	S304P-D50	2CDS384001R0501		0.512	1
	63	9075961	S304P-D63	2CDS384001R0631		0.512	1

MCBs

S 300 series P-D characteristic

With disconnecting neutral NA

S 301 P NA

S 303 P NA

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0,5	9079112	S301P-D0,5NA	2CDS381103R0981		0.233	5
	1	9079884	S301P-D1NA	2CDS381103R0011		0.233	5
	1,6	9079136	S301P-D1,6NA	2CDS381103R0971		0.233	5
	2	9079860	S301P-D2NA	2CDS381103R0021		0.233	5
	3	9079846	S301P-D3NA	2CDS381103R0031		0.233	5
	4	9079822	S301P-D4NA	2CDS381103R0041		0.233	5
	6	9079808	S301P-D6NA	2CDS381103R0061		0.233	5
	8	9085717	S301P-D8NA	2CDS381103R0081		0.233	5
	10	9079754	S301P-D10NA	2CDS381103R0101		0.233	5
	13	9079716	S301P-D13NA	2CDS381103R0131		0.236	5
	16	9079662	S301P-D16NA	2CDS381103R0161		0.236	5
	20	9079624	S301P-D20NA	2CDS381103R0201		0.236	5
	25	9079570	S301P-D25NA	2CDS381103R0251		0.241	5
	32	9079488	S301P-D32NA	2CDS381103R0321		0.246	5
	40	9079419	S301P-D40NA	2CDS381103R0401		0.246	5
	50	9079297	S301P-D50NA	2CDS381103R0501		0.246	5
	63	9079167	S301P-D63NA	2CDS381103R0631		0.246	5
3+NA	0,5	9076715	S303P-D0,5NA	2CDS383103R0981		0.473	1
	1	9077491	S303P-D1NA	2CDS383103R0011		0.473	1
	1,6	9076739	S303P-D1,6NA	2CDS383103R0971		0.473	1
	2	9077477	S303P-D2NA	2CDS383103R0021		0.473	1
	3	9077453	S303P-D3NA	2CDS383103R0031		0.473	1
	4	9077439	S303P-D4NA	2CDS383103R0041		0.473	1
	6	9077415	S303P-D6NA	2CDS383103R0061		0.473	1
	8	9077385	S303P-D8NA	2CDS383103R0081		0.473	1
	10	9077354	S303P-D10NA	2CDS383103R0101		0.473	1
	13	9077316	S303P-D13NA	2CDS383103R0131		0.482	1
	16	9077262	S303P-D16NA	2CDS383103R0161		0.482	1
	20	9077224	S303P-D20NA	2CDS383103R0201		0.482	1
	25	9077170	S303P-D25NA	2CDS383103R0251		0.487	1
	32	9077088	S303P-D32NA	2CDS383103R0321		0.502	1
	40	9077019	S303P-D40NA	2CDS383103R0401		0.502	1
	50	9076890	S303P-D50NA	2CDS383103R0501		0.502	1
	63	9076760	S303P-D63NA	2CDS383103R0631		0.502	1

MCBs

S 300 series P-K characteristic

S 300 P-K (power) characteristic
Function: protection and control of the circuits like motors. transformers and auxiliary circuits. against overloads and short-circuits.
Advantages: no nuisance tripping in the case of functional peak currents up to 10xIn. depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=25 kA; 100 kA (≤6 A)

S 301 P

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0,2	9080552	S301P-K0,2	2CDS381001R0087		0.120	10
	0,3	9080514	S301P-K0,3	2CDS381001R0117		0.120	10
	0,5	9080477	S301P-K0,5	2CDS381001R0157		0.120	10
	0,75	9080422	S301P-K0,75	2CDS381001R0187		0.120	10
	1	9080385	S301P-K1	2CDS381001R0217		0.120	10
	1,6	9080330	S301P-K1,6	2CDS381001R0257		0.120	10
	2	9080316	S301P-K2	2CDS381001R0277		0.120	10
	3	9080293	S301P-K3	2CDS381001R0317		0.120	10
	4	9080248	S301P-K4	2CDS381001R0337		0.120	10
	6	9080224	S301P-K6	2CDS381001R0377		0.120	10
	8	9080170	S301P-K8	2CDS381001R0407		0.120	10
	10	9080156	S301P-K10	2CDS381001R0427		0.120	10
	13	9080132	S301P-K13	2CDS381001R0447		0.123	10
	16	9080125	S301P-K16	2CDS381001R0467		0.123	10
	20	9080101	S301P-K20	2CDS381001R0487		0.123	10
	25	9080057	S301P-K25	2CDS381001R0517		0.123	10
	32	9080033	S301P-K32	2CDS381001R0537		0.128	10
	40	9080019	S301P-K40	2CDS381001R0557		0.128	10
	50	9079990	S301P-K50	2CDS381001R0577		0.128	10
	63	9079976	S301P-K63	2CDS381001R0607		0.128	10

MCBs

S 300 series P-K characteristic

S 302 P

S 303 P

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
2	0,2	9078962	S302P-K0,2	2CDS382001R0087		0.240	5
	0,3	9078924	S302P-K0,3	2CDS382001R0117		0.240	5
	0,5	9078887	S302P-K0,5	2CDS382001R0157		0.240	5
	0,75	9078832	S302P-K0,75	2CDS382001R0187		0.240	5
	1	9078795	S302P-K1	2CDS382001R0217		0.240	5
	1,6	9078740	S302P-K1,6	2CDS382001R0257		0.240	5
	2	9078726	S302P-K2	2CDS382001R0277		0.240	5
	3	9078702	S302P-K3	2CDS382001R0317		0.240	5
	4	9078658	S302P-K4	2CDS382001R0337		0.240	5
	6	9078634	S302P-K6	2CDS382001R0377		0.240	5
	8	9078580	S302P-K8	2CDS382001R0407		0.240	5
	10	9078566	S302P-K10	2CDS382001R0427		0.240	5
	13	9078542	S302P-K13	2CDS382001R0447		0.246	5
	16	9078535	S302P-K16	2CDS382001R0467		0.246	5
	20	9078511	S302P-K20	2CDS382001R0487		0.246	5
	25	9078467	S302P-K25	2CDS382001R0517		0.246	5
	32	9078443	S302P-K32	2CDS382001R0537		0.256	5
	40	9078429	S302P-K40	2CDS382001R0557		0.256	5
	50	9078405	S302P-K50	2CDS382001R0577		0.256	5
	63	9078382	S302P-K63	2CDS382001R0607		0.256	5
3	0,2	9078160	S303P-K0,2	2CDS383001R0087		0.360	1
	0,3	9078122	S303P-K0,3	2CDS383001R0117		0.360	1
	0,5	9078085	S303P-K0,5	2CDS383001R0157		0.360	1
	0,75	9078030	S303P-K0,75	2CDS383001R0187		0.360	1
	1	9077996	S303P-K1	2CDS383001R0217		0.360	1
	1,6	9077941	S303P-K1,6	2CDS383001R0257		0.360	1
	2	9077927	S303P-K2	2CDS383001R0277		0.360	1
	3	9077903	S303P-K3	2CDS383001R0317		0.360	1
	4	9077859	S303P-K4	2CDS383001R0337		0.360	1
	6	9077835	S303P-K6	2CDS383001R0377		0.360	1
	8	9077781	S303P-K8	2CDS383001R0407		0.360	1
	10	9077767	S303P-K10	2CDS383001R0427		0.360	1
	13	9077743	S303P-K13	2CDS383001R0447		0.369	1
	16	9077736	S303P-K16	2CDS383001R0467		0.369	1
	20	9077712	S303P-K20	2CDS383001R0487		0.369	1
	25	9077668	S303P-K25	2CDS383001R0517		0.369	1
	32	9077644	S303P-K32	2CDS383001R0537		0.384	1
	40	9077620	S303P-K40	2CDS383001R0557		0.384	1
	50	9077606	S303P-K50	2CDS383001R0577		0.384	1
	63	9077583	S303P-K63	2CDS383001R0607		0.384	1

MCBs

S 300 series P-K characteristic

S 304 P

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
4	0,2	9076562	S304P-K0,2	2CDS384001R0087		0.480	1
	0,3	9076524	S304P-K0,3	2CDS384001R0117		0.480	1
	0,5	9076487	S304P-K0,5	2CDS384001R0157		0.480	1
	0,75	9076432	S304P-K0,75	2CDS384001R0187		0.480	1
	1	9076395	S304P-K1	2CDS384001R0217		0.480	1
	1,6	9076340	S304P-K1,6	2CDS384001R0257		0.480	1
	2	9076326	S304P-K2	2CDS384001R0277		0.480	1
	3	9135542	S304P-K3	2CDS384001R0317		0.480	1
	4	9076258	S304P-K4	2CDS384001R0337		0.480	1
	6	9076234	S304P-K6	2CDS384001R0377		0.480	1
	8	9076180	S304P-K8	2CDS384001R0407		0.480	1
	10	9076166	S304P-K10	2CDS384001R0427		0.480	1
	13	9076142	S304P-K13	2CDS384001R0447		0.492	1
	16	9076135	S304P-K16	2CDS384001R0467		0.492	1
	20	9076111	S304P-K20	2CDS384001R0487		0.492	1
	25	9076067	S304P-K25	2CDS384001R0517		0.492	1
	32	9076043	S304P-K32	2CDS384001R0537		0.512	1
	40	9076029	S304P-K40	2CDS384001R0557		0.512	1
	50	9135528	S304P-K50	2CDS384001R0577		0.512	1
	63	9075985	S304P-K63	2CDS384001R0607		0.512	1

With disconnecting neutral NA

S 301 P NA

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0,2	9079761	S301P-K0,2NA	2CDS381103R0087		0.233	5
	0,3	9079723	S301P-K0,3NA	2CDS381103R0117		0.233	5
	0,5	9079686	S301P-K0,5NA	2CDS381103R0157		0.233	5
	0,75	9079631	S301P-K0,75NA	2CDS381103R0187		0.233	5
	1	9079594	S301P-K1NA	2CDS381103R0217		0.233	5
	1,6	9079549	S301P-K1,6NA	2CDS381103R0257		0.233	5
	2	9079525	S301P-K2NA	2CDS381103R0277		0.233	5
	3	9079501	S301P-K3NA	2CDS381103R0317		0.233	5
	4	9079457	S301P-K4NA	2CDS381103R0337		0.233	5
	6	9079433	S301P-K6NA	2CDS381103R0377		0.233	5
	8	9079389	S301P-K8NA	2CDS381103R0407		0.233	5
	10	9079365	S301P-K10NA	2CDS381103R0427		0.233	5
	13	9079341	S301P-K13NA	2CDS381103R0447		0.236	5
	16	9079334	S301P-K16NA	2CDS381103R0467		0.236	5
	20	9079310	S301P-K20NA	2CDS381103R0487		0.236	5
	25	9079266	S301P-K25NA	2CDS381103R0517		0.241	5
	32	9079242	S301P-K32NA	2CDS381103R0537		0.246	5
	40	9079228	S301P-K40NA	2CDS381103R0557		0.246	5
	50	9135665	S301P-K50NA	2CDS381103R0577		0.246	5
	63	9079181	S301P-K63NA	2CDS381103R0607		0.246	5

MCBs

S 300 series P-K characteristic

S 303 P NA

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3+NA	0,2	9077361	S303P-K0,2NA	2CDS383103R0087		0.473	1
	0,3	9077323	S303P-K0,3NA	2CDS383103R0117		0.473	1
	0,5	9077286	S303P-K0,5NA	2CDS383103R0157		0.473	1
	0,75	9077231	S303P-K0,75NA	2CDS383103R0187		0.473	1
	1	9077194	S303P-K1NA	2CDS383103R0217		0.473	1
	1,6	9077149	S303P-K1,6NA	2CDS383103R0257		0.473	1
	2	9077125	S303P-K2NA	2CDS383103R0277		0.473	1
	3	9135634	S303P-K3NA	2CDS383103R0317		0.473	1
	4	9077057	S303P-K4NA	2CDS383103R0337		0.473	1
	6	9077033	S303P-K6NA	2CDS383103R0377		0.473	1
	8	9076982	S303P-K8NA	2CDS383103R0407		0.473	1
	10	9076968	S303P-K10NA	2CDS383103R0427		0.473	1
	13	9076944	S303P-K13NA	2CDS383103R0447		0.482	1
	16	9076937	S303P-K16NA	2CDS383103R0467		0.482	1
	20	9076913	S303P-K20NA	2CDS383103R0487		0.482	1
	25	9076869	S303P-K25NA	2CDS383103R0517		0.487	1
	32	9076845	S303P-K32NA	2CDS383103R0537		0.502	1
	40	9076821	S303P-K40NA	2CDS383103R0557		0.502	1
	50	9135597	S303P-K50NA	2CDS383103R0577		0.502	1
	63	9076784	S303P-K63NA	2CDS383103R0607		0.502	1

MCBs

S 300 series P-Z characteristic

S 301 P

S 302 P

S 300 P-Z characteristic
Function: protection and control of the electronic circuits against lower and long duration overloads and short-circuits.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=25 kA; 100 kA (≤6 A)

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0,5	9080460	S301P-Z0,5	2CDS381001R0158		0.120	10
	1	9080378	S301P-Z1	2CDS381001R0218		0.120	10
	1,6	9080323	S301P-Z1,6	2CDS381001R0258		0.120	10
	2	9080309	S301P-Z2	2CDS381001R0278		0.120	10
	3	9080286	S301P-Z3	2CDS381001R0318		0.120	10
	4	9080231	S301P-Z4	2CDS381001R0338		0.120	10
	6	9080217	S301P-Z6	2CDS381001R0378		0.120	10
	8	9080163	S301P-Z8	2CDS381001R0408		0.120	10
	10	9080149	S301P-Z10	2CDS381001R0428		0.120	10
	16	9080118	S301P-Z16	2CDS381001R0468		0.123	10
	20	9080095	S301P-Z20	2CDS381001R0488		0.123	10
	25	9080040	S301P-Z25	2CDS381001R0518		0.123	10
	32	9080026	S301P-Z32	2CDS381001R0538		0.128	10
	40	9080002	S301P-Z40	2CDS381001R0558		0.128	10
	50	9079983	S301P-Z50	2CDS381001R0578		0.128	10
	63	9079969	S301P-Z63	2CDS381001R0608		0.128	10
2	0,5	9078870	S302P-Z0,5	2CDS382001R0158		0.240	5
	1	9078788	S302P-Z1	2CDS382001R0218		0.240	5
	1,6	9078733	S302P-Z1,6	2CDS382001R0258		0.240	5
	2	9078719	S302P-Z2	2CDS382001R0278		0.240	5
	3	9078696	S302P-Z3	2CDS382001R0318		0.240	5
	4	9078641	S302P-Z4	2CDS382001R0338		0.240	5
	6	9078627	S302P-Z6	2CDS382001R0378		0.240	5
	8	9078573	S302P-Z8	2CDS382001R0408		0.240	5
	10	9078559	S302P-Z10	2CDS382001R0428		0.240	5
	16	9078528	S302P-Z16	2CDS382001R0468		0.246	5
	20	9078504	S302P-Z20	2CDS382001R0488		0.246	5
	25	9078450	S302P-Z25	2CDS382001R0518		0.246	5
	32	9078436	S302P-Z32	2CDS382001R0538		0.256	5
	40	9078412	S302P-Z40	2CDS382001R0558		0.256	5
	50	9078399	S302P-Z50	2CDS382001R0578		0.256	5
	63	9078375	S302P-Z63	2CDS382001R0608		0.256	5

MCBs

S 300 series P-Z characteristic

S 303 P

S 304 P

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0,5	9078078	S303P-Z0,5	2CDS383001R0158		0.360	1
	1	9077989	S303P-Z1	2CDS383001R0218		0.360	1
	1,6	9077934	S303P-Z1,6	2CDS383001R0258		0.360	1
	2	9077910	S303P-Z2	2CDS383001R0278		0.360	1
	3	9077897	S303P-Z3	2CDS383001R0318		0.360	1
	4	9077842	S303P-Z4	2CDS383001R0338		0.360	1
	6	9077828	S303P-Z6	2CDS383001R0378		0.360	1
	8	9077774	S303P-Z8	2CDS383001R0408		0.360	1
	10	9077750	S303P-Z10	2CDS383001R0428		0.360	1
	16	9077729	S303P-Z16	2CDS383001R0468		0.369	1
	20	9077705	S303P-Z20	2CDS383001R0488		0.369	1
	25	9077651	S303P-Z25	2CDS383001R0518		0.369	1
	32	9077637	S303P-Z32	2CDS383001R0538		0.384	1
	40	9077613	S303P-Z40	2CDS383001R0558		0.384	1
	50	9077590	S303P-Z50	2CDS383001R0578		0.384	1
	63	9077576	S303P-Z63	2CDS383001R0608		0.384	1
4	0,5	9076470	S304P-Z0,5	2CDS384001R0158		0.480	1
	1	9076388	S304P-Z1	2CDS384001R0218		0.480	1
	1,6	9076333	S304P-Z1,6	2CDS384001R0258		0.480	1
	2	9076319	S304P-Z2	2CDS384001R0278		0.480	1
	3	9076296	S304P-Z3	2CDS384001R0318		0.480	1
	4	9076241	S304P-Z4	2CDS384001R0338		0.480	1
	6	9076227	S304P-Z6	2CDS384001R0378		0.480	1
	8	9076173	S304P-Z8	2CDS384001R0408		0.480	1
	10	9076159	S304P-Z10	2CDS384001R0428		0.480	1
	16	9076128	S304P-Z16	2CDS384001R0468		0.492	1
	20	9135535	S304P-Z20	2CDS384001R0488		0.492	1
	25	9076050	S304P-Z25	2CDS384001R0518		0.492	1
	32	9076036	S304P-Z32	2CDS384001R0538		0.512	1
	40	9076012	S304P-Z40	2CDS384001R0558		0.512	1
	50	9075992	S304P-Z50	2CDS384001R0578		0.512	1
	63	9075978	S304P-Z63	2CDS384001R0608		0.512	1

MCBs

S 300 series P-Z characteristic

S 301 P NA

S 303 P NA

With disconnecting neutral NA

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+NA	0,5	9079679	S301P-Z0,5NA	2CDS381103R0158		0.233	5
	1	9079587	S301P-Z1NA	2CDS381103R0218		0.233	5
	1,6	9079532	S301P-Z1,6NA	2CDS381103R0258		0.233	5
	2	9079518	S301P-Z2NA	2CDS381103R0278		0.233	5
	3	9079495	S301P-Z3NA	2CDS381103R0318		0.233	5
	4	9079440	S301P-Z4NA	2CDS381103R0338		0.233	5
	6	9079426	S301P-Z6NA	2CDS381103R0378		0.233	5
	8	9079372	S301P-Z8NA	2CDS381103R0408		0.233	5
	10	9079358	S301P-Z10NA	2CDS381103R0428		0.233	5
	16	9079327	S301P-Z16NA	2CDS381103R0468		0.236	5
	20	9135672	S301P-Z20NA	2CDS381103R0488		0.236	5
	25	9079259	S301P-Z25NA	2CDS381103R0518		0.241	5
	32	9079235	S301P-Z32NA	2CDS381103R0538		0.246	5
	40	9079211	S301P-Z40NA	2CDS381103R0558		0.246	5
	50	9079198	S301P-Z50NA	2CDS381103R0578		0.246	5
	63	9079174	S301P-Z63NA	2CDS381103R0608		0.246	5
3+NA	0,5	9077279	S303P-Z0,5NA	2CDS383103R0158		0.473	1
	1	9077187	S303P-Z1NA	2CDS383103R0218		0.473	1
	1,6	9077132	S303P-Z1,6NA	2CDS383103R0258		0.473	1
	2	9077118	S303P-Z2NA	2CDS383103R0278		0.473	1
	3	9077095	S303P-Z3NA	2CDS383103R0318		0.473	1
	4	9077040	S303P-Z4NA	2CDS383103R0338		0.473	1
	6	9077026	S303P-Z6NA	2CDS383103R0378		0.473	1
	8	9076975	S303P-Z8NA	2CDS383103R0408		0.473	1
	10	9076951	S303P-Z10NA	2CDS383103R0428		0.473	1
	16	9076920	S303P-Z16NA	2CDS383103R0468		0.482	1
	20	9135610	S303P-Z20NA	2CDS383103R0488		0.482	1
	25	9076852	S303P-Z25NA	2CDS383103R0518		0.487	1
	32	9076838	S303P-Z32NA	2CDS383103R0538		0.502	1
	40	9076814	S303P-Z40NA	2CDS383103R0558		0.502	1
	50	9076791	S303P-Z50NA	2CDS383103R0578		0.502	1
	63	9076777	S303P-Z63NA	2CDS383103R0608		0.502	1

MCBs

M 300 P-D characteristic (magnetic only)

M 300 P-D characteristic (magnetic only)
Function: protection and control of the circuits against short-circuits;
Short circuit protection for people and large length of cables in TN and IT systems.
For full protection also against overload a seperate protection device is required
Applications: industrial.
Standard: IEC/EN 60947-2
Icu=25 kA; 100 kA (≤6 A)

M 301 P

M 302 P

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0,5	9089326	M301P-D0,5	2CDA381799R0981		0.120	10
	1	9086820	M301P-D1	2CDA381799R0011		0.120	10
	1,6	9089319	M301P-D1,6	2CDA381799R0971		0.120	10
	2,5	9089241	M301P-D2,5	2CDA381799R0291		0.120	10
	4	9089197	M301P-D4	2CDA381799R0041		0.120	10
	6,3	9089265	M301P-D6,3	2CDA381799R0361		0.120	10
	10	9089203	M301P-D10	2CDA381799R0101		0.120	10
	12,5	9089289	M301P-D12,5	2CDA381799R0491		0.123	10
	16	9089210	M301P-D16	2CDA381799R0161		0.123	10
	20	9089227	M301P-D20	2CDA381799R0201		0.123	10
	25	9089234	M301P-D25	2CDA381799R0251		0.123	10
	32	9089258	M301P-D32	2CDA381799R0321		0.128	10
	40	9089272	M301P-D40	2CDA381799R0401		0.128	10
	50	9089296	M301P-D50	2CDA381799R0501		0.128	10
	63	9089302	M301P-D63	2CDA381799R0631		0.128	10
2	0,5	9089470	M302P-D0,5	2CDA382799R0981		0.240	5
	1	9089333	M302P-D1	2CDA382799R0011		0.240	5
	1,6	9089463	M302P-D1,6	2CDA382799R0971		0.240	5
	2,5	9089395	M302P-D2,5	2CDA382799R0291		0.240	5
	4	9089340	M302P-D4	2CDA382799R0041		0.240	5
	6,3	9089418	M302P-D6,3	2CDA382799R0361		0.240	5
	10	9089357	M302P-D10	2CDA382799R0101		0.240	5
	12,5	9089432	M302P-D12,5	2CDA382799R0491		0.246	5
	16	9089364	M302P-D16	2CDA382799R0161		0.246	5
	20	9089371	M302P-D20	2CDA382799R0201		0.246	5
	25	9089388	M302P-D25	2CDA382799R0251		0.246	5
	32	9089401	M302P-D32	2CDA382799R0321		0.256	5
	40	9089425	M302P-D40	2CDA382799R0401		0.256	5
	50	9089449	M302P-D50	2CDA382799R0501		0.256	5
	63	9089456	M302P-D63	2CDA382799R0631		0.256	5

MCBs

M 300 P-D characteristic (magnetic only)

M 303 P

M 304 P

Number of poles	Rated current In A	Bbn 401677 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0,5	9089623	M303P-D0,5	2CDA383799R0981		0.360	1
	1	9089487	M303P-D1	2CDA383799R0011		0.360	1
	1,6	9089616	M303P-D1,6	2CDA383799R0971		0.360	1
	2,5	9089548	M303P-D2,5	2CDA383799R0291		0.360	1
	4	9089494	M303P-D4	2CDA383799R0041		0.360	1
	6,3	9089562	M303P-D6,3	2CDA383799R0361		0.360	1
	10	9089500	M303P-D10	2CDA383799R0101		0.360	1
	12,5	9089586	M303P-D12,5	2CDA383799R0491		0.369	1
	16	9089517	M303P-D16	2CDA383799R0161		0.369	1
	20	9089524	M303P-D20	2CDA383799R0201		0.369	1
	25	9089531	M303P-D25	2CDA383799R0251		0.369	1
	32	9089555	M303P-D32	2CDA383799R0321		0.384	1
	40	9089579	M303P-D40	2CDA383799R0401		0.384	1
	50	9089593	M303P-D50	2CDA383799R0501		0.384	1
	63	9089609	M303P-D63	2CDA383799R0631		0.384	1
4	0,5	9089777	M304P-D0,5	2CDA384799R0981		0.480	1
	1	9089630	M304P-D1	2CDA384799R0011		0.480	1
	1,6	9089760	M304P-D1,6	2CDA384799R0971		0.480	1
	2,5	9089692	M304P-D2,5	2CDA384799R0291		0.480	1
	4	9089647	M304P-D4	2CDA384799R0041		0.480	1
	6,3	9089715	M304P-D6,3	2CDA384799R0361		0.480	1
	10	9089654	M304P-D10	2CDA384799R0101		0.480	1
	12,5	9089739	M304P-D12,5	2CDA384799R0491		0.492	1
	16	9089661	M304P-D16	2CDA384799R0161		0.492	1
	20	9089678	M304P-D20	2CDA384799R0201		0.492	1
	25	9089685	M304P-D25	2CDA384799R0251		0.492	1
	32	9089708	M304P-D32	2CDA384799R0321		0.512	1
	40	9089722	M304P-D40	2CDA384799R0401		0.512	1
	50	9089746	M304P-D50	2CDA384799R0501		0.512	1
	63	9089753	M304P-D63	2CDA384799R0631		0.512	1

MCBs

SU 200 M series technical characteristic

General Data		
Standards		UL 489, CSA 22.2 No. 5, IEC/EN 60947-2
Poles		1P, 2P, 3P, 4P
Tripping characteristics		C, K, Z
Rated current In		0.2 - 63 A
Rated frequency f		50 / 60 Hz, DC (0 Hz)
Rated insulation voltage Ui acc. to IEC/EN 60664-1		440 V AC (phase to phase)
Overvoltage category		III
Pollution degree		3
IEC/EN 60947-2		
Rated operational voltage Ue		1P: 230 V AC; 2P, 3P, 4P: 400 V AC
Max. power frequency recovery voltage Umax AC		1P: 253 V AC; 2P, 3P, 4P: 440 V AC
Min. operating voltage		12 V AC, 12 V DC
Rated ultimate short-circuit breaking capacity Icu		15 kA
Rated service short-circuit breaking capacity Ics		≤ 40 A: 11.25 kA
		> 40 A: 7.5 kA
Rated impulse withstand voltage Uimp (1.2/50µs)		4 kV (test voltage 6.2 kV at sea level, 5 kV at 2,000 m)
Dielectric test voltage		2 kV (50 / 60Hz, 1 min.)
Reference temperature for tripping characteristics		30 °C
Electrical endurance cycles (OFF-ON-OFF)		In < 30 A: 20,000 ops (AC), In ≥ 30 A: 10,000 ops. (AC);
		1 cycle (2 s - ON, 13 s - OFF, In ≤ 32 A), 1 cycle (2 s - ON, 28 s - OFF, In > 32 A)
UL / CSA		
Rated voltage	AC	1P: 277 V AC up to 40 A for C, Z char.,
	AC	277 V AC up to 35 A for K char., 240 V AC
	AC	2P, 3P, 4P: 480 Y / 277 V AC up to 40 A for C, Z char.,
	AC	480 Y / 277 V AC up to 35 A for K char., 240 V AC
	DC	1P: 48 V DC; 2P: 96 V DC (2p in series)
Rated interrupting capacity acc. to UL 1077		–
Short-circuit current rating acc. to UL 489		10 kA
Application		–
Reference temperature for tripping characteristics		40 °C
Electrical endurance cycles (OFF-ON-OFF)		6,000 ops (AC), 6,000 ops. (DC); 1 cycle (1 s - ON, 9 s - OFF)

MCBs

SU 200 M series technical characteristic

Mechanical data	
Housing	Insulation group II, RAL 7035
Toggle	Insulation group II, black, sealable
Contact position indication	Real CPI (green OFF / red ON)
Protection degree acc. to DIN EN 60529	IP20*, IP40 in enclosure with cover
Mechanical endurance	20,000 ops.
Shock resistance acc. to IEC/EN 60068-2-27	25 g - 2 shocks - 13 ms
Vibration resistance acc. to IEC/EN 60068-2-6	5g - 20 cycles at 5…150…5 Hz with load 0.8 In
Environmental conditions (damp heat cyclic) acc. to IEC/EN 60068-2-30	28 cycles with 55°C/90-96% and 25°C/95-100%
Ambient temperature	-25 … +55°C
Storage temperature	-40 … +70 °C
Installation	
Terminal	Failsafe bi-directional cylinder-lift terminal
Cross-section of conductors (top/bottom)	solid, stranded: 35 mm^2 / 35 mm^2 flexible: 25 mm^2 / 25 mm^2
	18 – 4 AWG
Cross-section of busbars (top/bottom)	10 mm^2 / 10 mm^2
	18 – 8 AWG
Torque	2.8 Nm
	AWG 18-16: 13.3 in-lbs. AWG 14-10: 17.7 in-lbs. AWG 8-4: 39.8 in-lbs.
Screwdriver	No. 2 Pozidrive
Mounting	On DIN rail 35 mm acc. to EN 60715 by fast clip
Mounting position	any
Supply	optional
Dimensions and weight	
Mounting dimensions acc. to DIN 43880	Mounting dimension 3
Pole dimensions (H x D x W)	111 x 69 x 17.5 mm
Pole weight approx.	125 g
Combination with auxiliary elements	
Auxiliary contact	Yes
Signal contact	Yes
Shunt trip	Yes

* Also fulfilling the requirements acc. to the protection degree IPXXB

MCBs

SU 200 M series C characteristic

SU 200 M-C characteristic

Number of poles	Rated current	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
1	0.5	930741	SU201M-C0,5	2CDS271337R0984		0.122	1
	1	930758	SU201M-C1	2CDS271337R0014		0.122	1
	1.6	930765	SU201M-C1,6	2CDS271337R0974		0.122	1
	2	930772	SU201M-C2	2CDS271337R0024		0.122	1
	3	930789	SU201M-C3	2CDS271337R0034		0.122	1
	4	930796	SU201M-C4	2CDS271337R0044		0.122	1
	5	930802	SU201M-C5	2CDS271337R0054		0.122	1
	6	930819	SU201M-C6	2CDS271337R0064		0.122	1
	8	930833	SU201M-C8	2CDS271337R0084		0.122	1
	10	930840	SU201M-C10	2CDS271337R0104		0.122	1
	13	930857	SU201M-C13	2CDS271337R0134		0.125	1
	15	930864	SU201M-C15	2CDS271337R0154		0.125	1
	16	930871	SU201M-C16	2CDS271337R0164		0.125	1
	20	930888	SU201M-C20	2CDS271337R0204		0.125	1
	25	930895	SU201M-C25	2CDS271337R0254		0.125	1
	30	930901	SU201M-C30	2CDS271337R0304		0.130	1
	32	930918	SU201M-C32	2CDS271337R0324		0.130	1
	35	930925	SU201M-C35	2CDS271337R0354		0.130	1
	40	930932	SU201M-C40	2CDS271337R0404		0.130	1
	50	930949	SU201M-C50	2CDS271337R0504		0.130	1
	60	930956	SU201M-C60	2CDS271337R0604		0.130	1
	63	930963	SU201M-C63	2CDS271337R0634		0.130	1

MCBs

SU 200 M series C characteristic

Number of poles	Rated current	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
2	0.5	930970	SU202M-C0,5	2CDS272337R0984		0.244	1
	1	930987	SU202M-C1	2CDS272337R0014		0.244	1
	1.6	930994	SU202M-C1,6	2CDS272337R0974		0.244	1
	2	931007	SU202M-C2	2CDS272337R0024		0.244	1
	3	931014	SU202M-C3	2CDS272337R0034		0.244	1
	4	931021	SU202M-C4	2CDS272337R0044		0.244	1
	5	931038	SU202M-C5	2CDS272337R0054		0.244	1
	6	931045	SU202M-C6	2CDS272337R0064		0.244	1
	8	931069	SU202M-C8	2CDS272337R0084		0.244	1
	10	931076	SU202M-C10	2CDS272337R0104		0.244	1
	13	931083	SU202M-C13	2CDS272337R0134		0.250	1
	15	931090	SU202M-C15	2CDS272337R0154		0.250	1
	16	931106	SU202M-C16	2CDS272337R0164		0.250	1
	20	931113	SU202M-C20	2CDS272337R0204		0.250	1
	25	931120	SU202M-C25	2CDS272337R0254		0.250	1
	30	931137	SU202M-C30	2CDS272337R0304		0.260	1
	32	931144	SU202M-C32	2CDS272337R0324		0.260	1
	35	931151	SU202M-C35	2CDS272337R0354		0.260	1
	40	931168	SU202M-C40	2CDS272337R0404		0.260	1
	50	931175	SU202M-C50	2CDS272337R0504		0.260	1
	60	931182	SU202M-C60	2CDS272337R0604		0.260	1
	63	931199	SU202M-C63	2CDS272337R0634		0.260	1
3	0.5	931205	SU203M-C0,5	2CDS273337R0984		0.366	1
	1	931212	SU203M-C1	2CDS273337R0014		0.366	1
	1.6	931229	SU203M-C1,6	2CDS273337R0974		0.366	1
	2	931236	SU203M-C2	2CDS273337R0024		0.366	1
	3	931243	SU203M-C3	2CDS273337R0034		0.366	1
	4	931250	SU203M-C4	2CDS273337R0044		0.366	1
	5	931267	SU203M-C5	2CDS273337R0054		0.366	1
	6	931274	SU203M-C6	2CDS273337R0064		0.366	1
	8	931298	SU203M-C8	2CDS273337R0084		0.366	1
	10	931304	SU203M-C10	2CDS273337R0104		0.366	1
	13	931311	SU203M-C13	2CDS273337R0134		0.375	1
	15	931328	SU203M-C15	2CDS273337R0154		0.375	1
	16	931335	SU203M-C16	2CDS273337R0164		0.375	1
	20	931342	SU203M-C20	2CDS273337R0204		0.375	1
	25	931359	SU203M-C25	2CDS273337R0254		0.375	1
	30	931366	SU203M-C30	2CDS273337R0304		0.390	1
	32	931373	SU203M-C32	2CDS273337R0324		0.390	1
	35	931380	SU203M-C35	2CDS273337R0354		0.390	1
	40	931397	SU203M-C40	2CDS273337R0404		0.390	1
	50	931403	SU203M-C50	2CDS273337R0504		0.390	1
	60	931410	SU203M-C60	2CDS273337R0604		0.390	1
	63	931427	SU203M-C63	2CDS273337R0634		0.390	1

MCBs

SU 200 M series C characteristic

Number of poles	Rated current	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
4	0.5	931434	SU204M-C0,5	2CDS274337R0984		0.488	1
	1	931441	SU204M-C1	2CDS274337R0014		0.488	1
	1.6	931458	SU204M-C1,6	2CDS274337R0974		0.488	1
	2	931465	SU204M-C2	2CDS274337R0024		0.488	1
	3	931472	SU204M-C3	2CDS274337R0034		0.488	1
	4	931489	SU204M-C4	2CDS274337R0044		0.488	1
	5	931496	SU204M-C5	2CDS274337R0054		0.488	1
	6	931502	SU204M-C6	2CDS274337R0064		0.488	1
	8	931526	SU204M-C8	2CDS274337R0084		0.488	1
	10	931533	SU204M-C10	2CDS274337R0104		0.488	1
	13	931540	SU204M-C13	2CDS274337R0134		0.500	1
	15	931557	SU204M-C15	2CDS274337R0154		0.500	1
	16	931564	SU204M-C16	2CDS274337R0164		0.500	1
	20	931571	SU204M-C20	2CDS274337R0204		0.500	1
	25	931588	SU204M-C25	2CDS274337R0254		0.500	1
	30	931595	SU204M-C30	2CDS274337R0304		0.520	1
	32	931601	SU204M-C32	2CDS274337R0324		0.520	1
	35	931618	SU204M-C35	2CDS274337R0354		0.520	1
	40	931625	SU204M-C40	2CDS274337R0404		0.520	1
	50	931632	SU204M-C50	2CDS274337R0504		0.520	1
	60	931649	SU204M-C60	2CDS274337R0604		0.520	1
	63	931656	SU204M-C63	2CDS274337R0634		0.520	1

MCBs

SU 200 M series K characteristic

SU 200 M-K characteristic

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.2	929967	SU201M-K0,2	2CDS271337R0087		0.122	1
	0.3	929974	SU201M-K0,3	2CDS271337R0117		0.122	1
	0.5	929981	SU201M-K0,5	2CDS271337R0157		0.122	1
	0.75	929998	SU201M-K0,75	2CDS271337R0187		0.122	1
	1	930000	SU201M-K1	2CDS271337R0217		0.122	1
	1.6	930017	SU201M-K1,6	2CDS271337R0257		0.122	1
	2	930024	SU201M-K2	2CDS271337R0277		0.122	1
	3	930031	SU201M-K3	2CDS271337R0317		0.122	1
	4	930048	SU201M-K4	2CDS271337R0337		0.122	1
	5	930055	SU201M-K5	2CDS271337R0357		0.122	1
	6	930062	SU201M-K6	2CDS271337R0377		0.122	1
	8	930086	SU201M-K8	2CDS271337R0407		0.122	1
	10	930093	SU201M-K10	2CDS271337R0427		0.122	1
	13	930109	SU201M-K13	2CDS271337R0447		0.125	1
	15	930116	SU201M-K15	2CDS271337R0457		0.125	1
	16	930123	SU201M-K16	2CDS271337R0467		0.125	1
	20	930130	SU201M-K20	2CDS271337R0487		0.125	1
	25	930147	SU201M-K25	2CDS271337R0517		0.125	1
	30	930154	SU201M-K30	2CDS271337R0527		0.130	1
	32	930161	SU201M-K32	2CDS271337R0537		0.130	1
	35	930178	SU201M-K35	2CDS271337R0547		0.130	1
	40	930185	SU201M-K40	2CDS271337R0557		0.130	1
	50	930192	SU201M-K50	2CDS271337R0577		0.130	1
	60	930208	SU201M-K60	2CDS271337R0587		0.130	1
	63	930215	SU201M-K63	2CDS271337R0607		0.130	1

MCBs

SU 200 M series K characteristic

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
2	0.2	932585	SU202M-K0,2	2CDS272337R0087		0.244	1
	0.3	932592	SU202M-K0,3	2CDS272337R0117		0.244	1
	0.5	932608	SU202M-K0,5	2CDS272337R0157		0.244	1
	0.75	932615	SU202M-K0,75	2CDS272337R0187		0.244	1
	1	932622	SU202M-K1	2CDS272337R0217		0.244	1
	1.6	932639	SU202M-K1,6	2CDS272337R0257		0.244	1
	2	932646	SU202M-K2	2CDS272337R0277		0.244	1
	3	932653	SU202M-K3	2CDS272337R0317		0.244	1
	4	932660	SU202M-K4	2CDS272337R0337		0.244	1
	5	932677	SU202M-K5	2CDS272337R0357		0.244	1
	6	932684	SU202M-K6	2CDS272337R0377		0.244	1
	8	932707	SU202M-K8	2CDS272337R0407		0.244	1
	10	932714	SU202M-K10	2CDS272337R0427		0.244	1
	13	932721	SU202M-K13	2CDS272337R0447		0.250	1
	15	932738	SU202M-K15	2CDS272337R0457		0.250	1
	16	932745	SU202M-K16	2CDS272337R0467		0.250	1
	20	932752	SU202M-K20	2CDS272337R0487		0.250	1
	25	932769	SU202M-K25	2CDS272337R0517		0.250	1
	30	932776	SU202M-K30	2CDS272337R0527		0.260	1
	32	932783	SU202M-K32	2CDS272337R0537		0.260	1
	35	932790	SU202M-K35	2CDS272337R0547		0.260	1
	40	932806	SU202M-K40	2CDS272337R0557		0.260	1
	50	932813	SU202M-K50	2CDS272337R0577		0.260	1
	60	932820	SU202M-K60	2CDS272337R0587		0.260	1
	63	932837	SU202M-K63	2CDS272337R0607		0.260	1

MCBs

SU 200 M series K characteristic

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.2	930222	SU203M-K0,2	2CDS273337R0087		0.366	1
	0.3	930239	SU203M-K0,3	2CDS273337R0117		0.366	1
	0.5	930246	SU203M-K0,5	2CDS273337R0157		0.366	1
	0.75	930253	SU203M-K0,75	2CDS273337R0187		0.366	1
	1	930260	SU203M-K1	2CDS273337R0217		0.366	1
	1.6	930277	SU203M-K1,6	2CDS273337R0257		0.366	1
	2	930284	SU203M-K2	2CDS273337R0277		0.366	1
	3	930291	SU203M-K3	2CDS273337R0317		0.366	1
	4	930307	SU203M-K4	2CDS273337R0337		0.366	1
	5	930314	SU203M-K5	2CDS273337R0357		0.366	1
	6	930321	SU203M-K6	2CDS273337R0377		0.366	1
	8	930345	SU203M-K8	2CDS273337R0407		0.366	1
	10	930352	SU203M-K10	2CDS273337R0427		0.366	1
	13	930369	SU203M-K13	2CDS273337R0447		0.375	1
	15	930376	SU203M-K15	2CDS273337R0457		0.375	1
	16	930383	SU203M-K16	2CDS273337R0467		0.375	1
	20	930390	SU203M-K20	2CDS273337R0487		0.375	1
	25	930406	SU203M-K25	2CDS273337R0517		0.375	1
	30	930413	SU203M-K30	2CDS273337R0527		0.390	1
	32	930420	SU203M-K32	2CDS273337R0537		0.390	1
	35	930437	SU203M-K35	2CDS273337R0547		0.390	1
	40	930444	SU203M-K40	2CDS273337R0557		0.390	1
	50	930451	SU203M-K50	2CDS273337R0577		0.390	1
	60	930468	SU203M-K60	2CDS273337R0587		0.390	1
	63	930475	SU203M-K63	2CDS273337R0607		0.390	1

MCBs

SU 200 M series K characteristic

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
4	0.2	930482	SU204M-K0,2	2CDS274337R0087		0.488	1
	0.3	930499	SU204M-K0,3	2CDS274337R0117		0.488	1
	0.5	930505	SU204M-K0,5	2CDS274337R0157		0.488	1
	0.75	930512	SU204M-K0,75	2CDS274337R0187		0.488	1
	1	930529	SU204M-K1	2CDS274337R0217		0.488	1
	1.6	930536	SU204M-K1,6	2CDS274337R0257		0.488	1
	2	930543	SU204M-K2	2CDS274337R0277		0.488	1
	3	930550	SU204M-K3	2CDS274337R0317		0.488	1
	4	930567	SU204M-K4	2CDS274337R0337		0.488	1
	5	930574	SU204M-K5	2CDS274337R0357		0.488	1
	6	930581	SU204M-K6	2CDS274337R0377		0.488	1
	8	930604	SU204M-K8	2CDS274337R0407		0.488	1
	10	930611	SU204M-K10	2CDS274337R0427		0.488	1
	13	930628	SU204M-K13	2CDS274337R0447		0.500	1
	15	930635	SU204M-K15	2CDS274337R0457		0.500	1
	16	930642	SU204M-K16	2CDS274337R0467		0.500	1
	20	930659	SU204M-K20	2CDS274337R0487		0.500	1
	25	930666	SU204M-K25	2CDS274337R0517		0.500	1
	30	930673	SU204M-K30	2CDS274337R0527		0.520	1
	32	930680	SU204M-K32	2CDS274337R0537		0.520	1
	35	930697	SU204M-K35	2CDS274337R0547		0.520	1
	40	930703	SU204M-K40	2CDS274337R0557		0.520	1
	50	930710	SU204M-K50	2CDS274337R0577		0.520	1
	60	930727	SU204M-K60	2CDS274337R0587		0.520	1
	63	930734	SU204M-K63	2CDS274337R0607		0.520	1

MCBs

SU 200 M series Z characteristic

SU 200 M-Z characteristic

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	932844	SU201M-Z0,5	2CDS271337R0158		0.122	1
	1	932851	SU201M-Z1	2CDS271337R0218		0.122	1
	1.6	932868	SU201M-Z1,6	2CDS271337R0258		0.122	1
	2	932875	SU201M-Z2	2CDS271337R0278		0.122	1
	3	932882	SU201M-Z3	2CDS271337R0318		0.122	1
	4	932899	SU201M-Z4	2CDS271337R0338		0.122	1
	5	932905	SU201M-Z5	2CDS271337R0358		0.122	1
	6	932912	SU201M-Z6	2CDS271337R0378		0.122	1
	8	932936	SU201M-Z8	2CDS271337R0408		0.122	1
	10	932943	SU201M-Z10	2CDS271337R0428		0.122	1
	13	932950	SU201M-Z13	2CDS271337R0448		0.125	1
	15	932967	SU201M-Z15	2CDS271337R0458		0.125	1
	16	932974	SU201M-Z16	2CDS271337R0468		0.125	1
	20	932981	SU201M-Z20	2CDS271337R0488		0.125	1
	25	932998	SU201M-Z25	2CDS271337R0518		0.125	1
	30	933001	SU201M-Z30	2CDS271337R0528		0.130	1
	32	933018	SU201M-Z32	2CDS271337R0538		0.130	1
	35	933025	SU201M-Z35	2CDS271337R0548		0.130	1
	40	933032	SU201M-Z40	2CDS271337R0558		0.130	1
	50	933049	SU201M-Z50	2CDS271337R0578		0.130	1
	60	933056	SU201M-Z60	2CDS271337R0588		0.130	1
	63	933063	SU201M-Z63	2CDS271337R0608		0.130	1

MCBs

SU 200 M series Z characteristic

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
2	0.5	933070	SU202M-Z0,5	2CDS272337R0158		0.244	1
	1	933087	SU202M-Z1	2CDS272337R0218		0.244	1
	1.6	933094	SU202M-Z1,6	2CDS272337R0258		0.244	1
	2	933100	SU202M-Z2	2CDS272337R0278		0.244	1
	3	933117	SU202M-Z3	2CDS272337R0318		0.244	1
	4	933124	SU202M-Z4	2CDS272337R0338		0.244	1
	5	933131	SU202M-Z5	2CDS272337R0358		0.244	1
	6	933148	SU202M-Z6	2CDS272337R0378		0.244	1
	8	933162	SU202M-Z8	2CDS272337R0408		0.244	1
	10	933179	SU202M-Z10	2CDS272337R0428		0.244	1
	13	933186	SU202M-Z13	2CDS272337R0448		0.250	1
	15	933193	SU202M-Z15	2CDS272337R0458		0.250	1
	16	933209	SU202M-Z16	2CDS272337R0468		0.250	1
	20	933216	SU202M-Z20	2CDS272337R0488		0.250	1
	25	933223	SU202M-Z25	2CDS272337R0518		0.250	1
	30	933230	SU202M-Z30	2CDS272337R0528		0.260	1
	32	933247	SU202M-Z32	2CDS272337R0538		0.260	1
	35	933254	SU202M-Z35	2CDS272337R0548		0.260	1
	40	933261	SU202M-Z40	2CDS272337R0558		0.260	1
	50	933278	SU202M-Z50	2CDS272337R0578		0.260	1
	60	933285	SU202M-Z60	2CDS272337R0588		0.260	1
	63	933292	SU202M-Z63	2CDS272337R0608		0.260	1
3	0.5	933308	SU203M-Z0,5	2CDS273337R0158		0.366	1
	1	933315	SU203M-Z1	2CDS273337R0218		0.366	1
	1.6	933322	SU203M-Z1,6	2CDS273337R0258		0.366	1
	2	933339	SU203M-Z2	2CDS273337R0278		0.366	1
	3	933346	SU203M-Z3	2CDS273337R0318		0.366	1
	4	933353	SU203M-Z4	2CDS273337R0338		0.366	1
	5	933360	SU203M-Z5	2CDS273337R0358		0.366	1
	6	933377	SU203M-Z6	2CDS273337R0378		0.366	1
	8	933391	SU203M-Z8	2CDS273337R0408		0.366	1
	10	933407	SU203M-Z10	2CDS273337R0428		0.366	1
	13	933414	SU203M-Z13	2CDS273337R0448		0.375	1
	15	933421	SU203M-Z15	2CDS273337R0458		0.375	1
	16	933438	SU203M-Z16	2CDS273337R0468		0.375	1
	20	933445	SU203M-Z20	2CDS273337R0488		0.375	1
	25	933452	SU203M-Z25	2CDS273337R0518		0.375	1
	30	933469	SU203M-Z30	2CDS273337R0528		0.390	1
	32	933476	SU203M-Z32	2CDS273337R0538		0.390	1
	35	933483	SU203M-Z35	2CDS273337R0548		0.390	1
	40	933490	SU203M-Z40	2CDS273337R0558		0.390	1
	50	933506	SU203M-Z50	2CDS273337R0578		0.390	1
	60	933513	SU203M-Z60	2CDS273337R0588		0.390	1
	63	933520	SU203M-Z63	2CDS273337R0608		0.390	1

MCBs

SU 200 M series Z characteristic

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
4	0.5	933537	SU204M-Z0,5	2CDS274337R0158		0.488	1
	1	933544	SU204M-Z1	2CDS274337R0218		0.488	1
	1.6	933551	SU204M-Z1,6	2CDS274337R0258		0.488	1
	2	933568	SU204M-Z2	2CDS274337R0278		0.488	1
	3	933575	SU204M-Z3	2CDS274337R0318		0.488	1
	4	933582	SU204M-Z4	2CDS274337R0338		0.488	1
	5	933599	SU204M-Z5	2CDS274337R0358		0.488	1
	6	933605	SU204M-Z6	2CDS274337R0378		0.488	1
	8	933629	SU204M-Z8	2CDS274337R0408		0.488	1
	10	933636	SU204M-Z10	2CDS274337R0428		0.488	1
	13	933643	SU204M-Z13	2CDS274337R0448		0.500	1
	15	933650	SU204M-Z15	2CDS274337R0458		0.500	1
	16	933667	SU204M-Z16	2CDS274337R0468		0.500	1
	20	933674	SU204M-Z20	2CDS274337R0488		0.500	1
	25	933681	SU204M-Z25	2CDS274337R0518		0.500	1
	30	933698	SU204M-Z30	2CDS274337R0528		0.520	1
	32	933704	SU204M-Z32	2CDS274337R0538		0.520	1
	35	933711	SU204M-Z35	2CDS274337R0548		0.520	1
	40	933728	SU204M-Z40	2CDS274337R0558		0.520	1
	50	933735	SU204M-Z50	2CDS274337R0578		0.520	1
	60	933742	SU204M-Z60	2CDS274337R0588		0.520	1
	63	933759	SU204M-Z63	2CDS274337R0608		0.520	1

MCBs

Circuit breaker SU 200 MR series, 10kA

The SU200 MR is a high-performance circuit breaker with ring cable lug connections conforming to UL 489; CSA 22.2. No. 5 and IEC/EN 60947-2 standards. The integrated captive connecting screws simplify the connection of electric lines, provides extra protection and saves time.

SU201 MR

SU202 MR

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.2	956192	SU201MR-K0.2	2CDS271347R0087		0.122	1
	0.3	956215	SU201MR-K0.3	2CDS271347R0117		0.122	1
	0.5	956239	SU201MR-K0.5	2CDS271347R0157		0.122	1
	0.75	956253	SU201MR-K0.75	2CDS271347R0187		0.122	1
	1	956277	SU201MR-K1	2CDS271347R0217		0.122	1
	1.6	956291	SU201MR-K1.6	2CDS271347R0257		0.122	1
	2	956314	SU201MR-K2	2CDS271347R0277		0.122	1
	3	956338	SU201MR-K3	2CDS271347R0317		0.122	1
	4	956352	SU201MR-K4	2CDS271347R0337		0.122	1
	5	956376	SU201MR-K5	2CDS271347R0357		0.122	1
	6	956390	SU201MR-K6	2CDS271347R0377		0.122	1
	8	956413	SU201MR-K8	2CDS271347R0407		0.122	1
	10	956437	SU201MR-K10	2CDS271347R0427		0.122	1
	13	956451	SU201MR-K13	2CDS271347R0447		0.125	1
	15	956475	SU201MR-K15	2CDS271347R0457		0.125	1
	16	956499	SU201MR-K16	2CDS271347R0467		0.125	1
	20	956512	SU201MR-K20	2CDS271347R0487		0.125	1
	25	956536	SU201MR-K25	2CDS271347R0517		0.125	1
	30	956550	SU201MR-K30	2CDS271347R0527		0.130	1
	32	956574	SU201MR-K32	2CDS271347R0537		0.130	1
	35	956598	SU201MR-K35	2CDS271347R0547		0.130	1
	40	956611	SU201MR-K40	2CDS271347R0557		0.130	1
	50	956635	SU201MR-K50	2CDS271347R0577		0.130	1
	60	956659	SU201MR-K60	2CDS271347R0587		0.130	1
	63	956673	SU201MR-K63	2CDS271347R0607		0.130	1
2	0.2	957175	SU202MR-K0.2	2CDS272347R0087		0.244	1
	0.3	957199	SU202MR-K0.3	2CDS272347R0117		0.244	1
	0.5	957212	SU202MR-K0.5	2CDS272347R0157		0.244	1
	0.75	957236	SU202MR-K0.75	2CDS272347R0187		0.244	1
	1	957250	SU202MR-K1	2CDS272347R0217		0.244	1
	1.6	957274	SU202MR-K1.6	2CDS272347R0257		0.244	1
	2	957298	SU202MR-K2	2CDS272347R0277		0.244	1
	3	957311	SU202MR-K3	2CDS272347R0317		0.244	1
	4	957335	SU202MR-K4	2CDS272347R0337		0.244	1
	5	957359	SU202MR-K5	2CDS272347R0357		0.244	1
	6	957373	SU202MR-K6	2CDS272347R0377		0.244	1
	8	957397	SU202MR-K8	2CDS272347R0407		0.244	1
	10	957410	SU202MR-K10	2CDS272347R0427		0.244	1
	13	957434	SU202MR-K13	2CDS272347R0447		0.250	1
	15	957458	SU202MR-K15	2CDS272347R0457		0.250	1
	16	957472	SU202MR-K16	2CDS272347R0467		0.250	1
	20	957496	SU202MR-K20	2CDS272347R0487		0.250	1
	25	957519	SU202MR-K25	2CDS272347R0517		0.250	1
	30	957533	SU202MR-K30	2CDS272347R0527		0.260	1
	32	957557	SU202MR-K32	2CDS272347R0537		0.260	1
	35	957571	SU202MR-K35	2CDS272347R0547		0.260	1
	40	957595	SU202MR-K40	2CDS272347R0557		0.260	1
	50	957618	SU202MR-K50	2CDS272347R0577		0.260	1
	60	957632	SU202MR-K60	2CDS272347R0587		0.260	1
	63	957656	SU202MR-K63	2CDS272347R0607		0.260	1

MCBs

Circuit breaker SU 200 MR series, 10kA

SU203 MR

SU204 MR

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	0.2	958172	SU203MR-K0.2	2CDS273347R0087		0.366	1
	0.3	958196	SU203MR-K0.3	2CDS273347R0117		0.366	1
	0.5	958219	SU203MR-K0.5	2CDS273347R0157		0.366	1
	0.75	958233	SU203MR-K0.75	2CDS273347R0187		0.366	1
	1	958257	SU203MR-K1	2CDS273347R0217		0.366	1
	1.6	958271	SU203MR-K1.6	2CDS273347R0257		0.366	1
	2	958295	SU203MR-K2	2CDS273347R0277		0.366	1
	3	958318	SU203MR-K3	2CDS273347R0317		0.366	1
	4	958332	SU203MR-K4	2CDS273347R0337		0.366	1
	5	958356	SU203MR-K5	2CDS273347R0357		0.366	1
	6	958370	SU203MR-K6	2CDS273347R0377		0.366	1
	8	958394	SU203MR-K8	2CDS273347R0407		0.366	1
	10	958417	SU203MR-K10	2CDS273347R0427		0.366	1
	13	958431	SU203MR-K13	2CDS273347R0447		0.375	1
	15	958455	SU203MR-K15	2CDS273347R0457		0.375	1
	16	958479	SU203MR-K16	2CDS273347R0467		0.375	1
	20	958493	SU203MR-K20	2CDS273347R0487		0.375	1
	25	958516	SU203MR-K25	2CDS273347R0517		0.375	1
	30	958530	SU203MR-K30	2CDS273347R0527		0.390	1
	32	958554	SU203MR-K32	2CDS273347R0537		0.390	1
	35	958578	SU203MR-K35	2CDS273347R0547		0.390	1
	40	958592	SU203MR-K40	2CDS273347R0557		0.390	1
	50	958615	SU203MR-K50	2CDS273347R0577		0.390	1
	60	958639	SU203MR-K60	2CDS273347R0587		0.390	1
	63	958653	SU203MR-K63	2CDS273347R0607		0.390	1
4	0.2	959179	SU204MR-K0.2	2CDS274347R0087		0.488	1
	0.3	959193	SU204MR-K0.3	2CDS274347R0117		0.488	1
	0.5	959216	SU204MR-K0.5	2CDS274347R0157		0.488	1
	0.75	959230	SU204MR-K0.75	2CDS274347R0187		0.488	1
	1	959254	SU204MR-K1	2CDS274347R0217		0.488	1
	1.6	959278	SU204MR-K1.6	2CDS274347R0257		0.488	1
	2	959292	SU204MR-K2	2CDS274347R0277		0.488	1
	3	959315	SU204MR-K3	2CDS274347R0317		0.488	1
	4	959339	SU204MR-K4	2CDS274347R0337		0.488	1
	5	959353	SU204MR-K5	2CDS274347R0357		0.488	1
	6	959377	SU204MR-K6	2CDS274347R0377		0.488	1
	8	959391	SU204MR-K8	2CDS274347R0407		0.488	1
	10	959414	SU204MR-K10	2CDS274347R0427		0.488	1
	13	959438	SU204MR-K13	2CDS274347R0447		0.500	1
	15	959452	SU204MR-K15	2CDS274347R0457		0.500	1
	16	959476	SU204MR-K16	2CDS274347R0467		0.500	1
	20	959490	SU204MR-K20	2CDS274347R0487		0.500	1
	25	959513	SU204MR-K25	2CDS274347R0517		0.500	1
	30	959537	SU204MR-K30	2CDS274347R0527		0.520	1
	32	959551	SU204MR-K32	2CDS274347R0537		0.520	1
	35	959575	SU204MR-K35	2CDS274347R0547		0.520	1
	40	959599	SU204MR-K40	2CDS274347R0557		0.520	1
	50	959612	SU204MR-K50	2CDS274347R0577		0.520	1
	60	959636	SU204MR-K60	2CDS274347R0587		0.520	1
	63	959650	SU204MR-K63	2CDS274347R0607		0.520	1

MCBs

SU 200 DC series - Direct current range, UL489, K characteristic

SU 200 DC-K characteristic
Function: protection and control of the circuits like motors, transformers and auxiliary circuits, against overloads and short-circuits.
Advantages: no nuisance tripping in the case of functional peak currents up to 10xIn, depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines.
Applications: commercial and industrial
Standard: UL 489, CSA 22.2 No. 5
(for use in DC circuits only, please note polarity of device)
Short-circuit current rating (SCCR acc. to UL 489): 14 kA

SU 201 DC

Number of poles	Rated current In A	Bbn 4053546 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.2	170320	SU201DC-K0.2	2CDS271527R0087		0.120	10
	0.3	175813	SU201DC-K0.3	2CDS271527R0117		0.120	10
	0.5	175820	SU201DC-K0.5	2CDS271527R0157		0.120	10
	0.75	175844	SU201DC-K0.75	2CDS271527R0187		0.120	10
	1.0	175851	SU201DC-K1	2CDS271527R0217		0.120	10
	1.6	175875	SU201DC-K1.6	2CDS271527R0257		0.120	10
	2.0	175899	SU201DC-K2	2CDS271527R0277		0.120	10
	3.0	175912	SU201DC-K3	2CDS271527R0317		0.120	10
	4.0	175936	SU201DC-K4	2CDS271527R0337		0.120	10
	5.0	175950	SU201DC-K5	2CDS271527R0357		0.120	10
	6.0	175974	SU201DC-K6	2CDS271527R0377		0.120	10
	7.0	175998	SU201DC-K7	2CDS271527R0407		0.120	10
	8.0	176018	SU201DC-K8	2CDS271527R0427		0.120	10
	10.0	176032	SU201DC-K10	2CDS271527R0447		0.120	10
	13.0	176049	SU201DC-K13	2CDS271527R0457		0.120	10
	15.0	176063	SU201DC-K15	2CDS271527R0467		0.120	10
	16.0	176087	SU201DC-K16	2CDS271527R0487		0.120	10
	20.0	176100	SU201DC-K20	2CDS271527R0517		0.120	10
	25.0	176124	SU201DC-K25	2CDS271527R0527		0.120	10
	30.0	176148	SU201DC-K30	2CDS271527R0537		0.120	10
	32.0	176162	SU201DC-K32	2CDS271527R0547		0.120	10
	40.0	176186	SU201DC-K40	2CDS271527R0557		0.120	10
	50.0	176209	SU201DC-K50	2CDS271527R0577		0.120	10
	60.0	176223	SU201DC-K60	2CDS271527R0587		0.120	10
	63.0	176247	SU201DC-K63	2CDS271527R0607		0.120	10

MCBs

SU 200 DC series - Direct current range, UL489, K characteristic

SU 202 DC

Number of poles	Rated current In A	Bbn 4053546 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
2	0.2	176797	SU202DC-K0.2	2CDS272527R0087		0.240	5
	0.3	176803	SU202DC-K0.3	2CDS272527R0117		0.240	5
	0.5	176810	SU202DC-K0.5	2CDS272527R0157		0.240	5
	0.75	176834	SU202DC-K0.75	2CDS272527R0187		0.240	5
	1.0	176841	SU202DC-K1	2CDS272527R0217		0.240	5
	1.6	176865	SU202DC-K1.6	2CDS272527R0257		0.240	5
	2.0	176889	SU202DC-K2	2CDS272527R0277		0.240	5
	3.0	176902	SU202DC-K3	2CDS272527R0317		0.240	5
	4.0	176926	SU202DC-K4	2CDS272527R0337		0.240	5
	5.0	176940	SU202DC-K5	2CDS272527R0357		0.240	5
	6.0	176964	SU202DC-K6	2CDS272527R0377		0.240	5
	7.0	176988	SU202DC-K7	2CDS272527R0407		0.240	5
	8.0	177008	SU202DC-K8	2CDS272527R0427		0.240	5
	10.0	177022	SU202DC-K10	2CDS272527R0447		0.240	5
	13.0	177039	SU202DC-K13	2CDS272527R0457		0.240	5
	15.0	177053	SU202DC-K15	2CDS272527R0467		0.240	5
	16.0	177077	SU202DC-K16	2CDS272527R0487		0.240	5
	20.0	177091	SU202DC-K20	2CDS272527R0517		0.240	5
	25.0	177114	SU202DC-K25	2CDS272527R0527		0.240	5
	30.0	177138	SU202DC-K30	2CDS272527R0537		0.240	5
	32.0	177152	SU202DC-K32	2CDS272527R0547		0.240	5
	40.0	177176	SU202DC-K40	2CDS272527R0557		0.240	5
	50.0	177190	SU202DC-K50	2CDS272527R0577		0.240	5
	60.0	177213	SU202DC-K60	2CDS272527R0587		0.240	5
	63.0	177237	SU202DC-K63	2CDS272527R0607		0.240	5

MCBs

SU 200 DC series - Direct current range, UL489, Z characteristic

SU 201 DC

SU 202 DC

SU 200 DC-Z characteristic
Function: protection and control of the electronic circuits against lower and long duration overloads and short-circuits.
Applications: commercial and industrial.
Standard: UL 489, CSA 22.2 No. 5
(for use in DC circuits only, please note polarity of device)
Short-circuit current rating (SCCR acc. to UL 489): 14 kA

Number of poles	Rated current In A	Bbn 4053546 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	0.5	175837	SU201DC-Z0,5	2CDS271527R0158		0.120	10
	1.0	175868	SU201DC-Z1	2CDS271527R0218		0.120	10
	1.6	175882	SU201DC-Z1,6	2CDS271527R0258		0.120	10
	2.0	175905	SU201DC-Z2	2CDS271527R0278		0.120	10
	3.0	175929	SU201DC-Z3	2CDS271527R0318		0.120	10
	4.0	175943	SU201DC-Z4	2CDS271527R0338		0.120	10
	5.0	175967	SU201DC-Z5	2CDS271527R0358		0.120	10
	6.0	175981	SU201DC-Z6	2CDS271527R0378		0.120	10
	8.0	176001	SU201DC-Z8	2CDS271527R0408		0.120	10
	10.0	176025	SU201DC-Z10	2CDS271527R0428		0.120	10
	15.0	176056	SU201DC-Z15	2CDS271527R0458		0.120	10
	16.0	176070	SU201DC-Z16	2CDS271527R0468		0.120	10
	20.0	176094	SU201DC-Z20	2CDS271527R0488		0.120	10
	25.0	176117	SU201DC-Z25	2CDS271527R0518		0.120	10
	30.0	176131	SU201DC-Z30	2CDS271527R0528		0.120	10
	32.0	176155	SU201DC-Z32	2CDS271527R0538		0.120	10
	35.0	176179	SU201DC-Z35	2CDS271527R0548		0.120	10
	40.0	176193	SU201DC-Z40	2CDS271527R0558		0.120	10
	50.0	176216	SU201DC-Z50	2CDS271527R0578		0.120	10
	60.0	176230	SU201DC-Z60	2CDS271527R0588		0.120	10
	63.0	176780	SU201DC-Z63	2CDS271527R0608		0.120	10
2	0.5	176827	SU202DC-Z0,5	2CDS272527R0158		0.240	5
	1.0	176858	SU202DC-Z1	2CDS272527R0218		0.240	5
	1.6	176872	SU202DC-Z1,6	2CDS272527R0258		0.240	5
	2.0	176896	SU202DC-Z2	2CDS272527R0278		0.240	5
	3.0	176919	SU202DC-Z3	2CDS272527R0318		0.240	5
	4.0	176933	SU202DC-Z4	2CDS272527R0338		0.240	5
	5.0	176957	SU202DC-Z5	2CDS272527R0358		0.240	5
	6.0	176971	SU202DC-Z6	2CDS272527R0378		0.240	5
	8.0	176995	SU202DC-Z8	2CDS272527R0408		0.240	5
	10.0	177015	SU202DC-Z10	2CDS272527R0428		0.240	5
	15.0	177046	SU202DC-Z15	2CDS272527R0458		0.240	5
	16.0	177060	SU202DC-Z16	2CDS272527R0468		0.240	5
	20.0	177084	SU202DC-Z20	2CDS272527R0488		0.240	5
	25.0	177107	SU202DC-Z25	2CDS272527R0518		0.240	5
	30.0	177121	SU202DC-Z30	2CDS272527R0528		0.240	5
	32.0	177145	SU202DC-Z32	2CDS272527R0538		0.240	5
	35.0	177169	SU201DC-Z35	2CDS272527R0548		0.240	5
	40.0	177183	SU202DC-Z40	2CDS272527R0558		0.240	5
	50.0	177206	SU202DC-Z50	2CDS272527R0578		0.240	5
	60.0	177220	SU202DC-Z60	2CDS272527R0588		0.240	5
	63.0	177244	SU202DC-Z63	2CDS272527R0608		0.240	5

Notes

MCB SN 201. The details make the difference

A range designed to ensure efficiency and protection

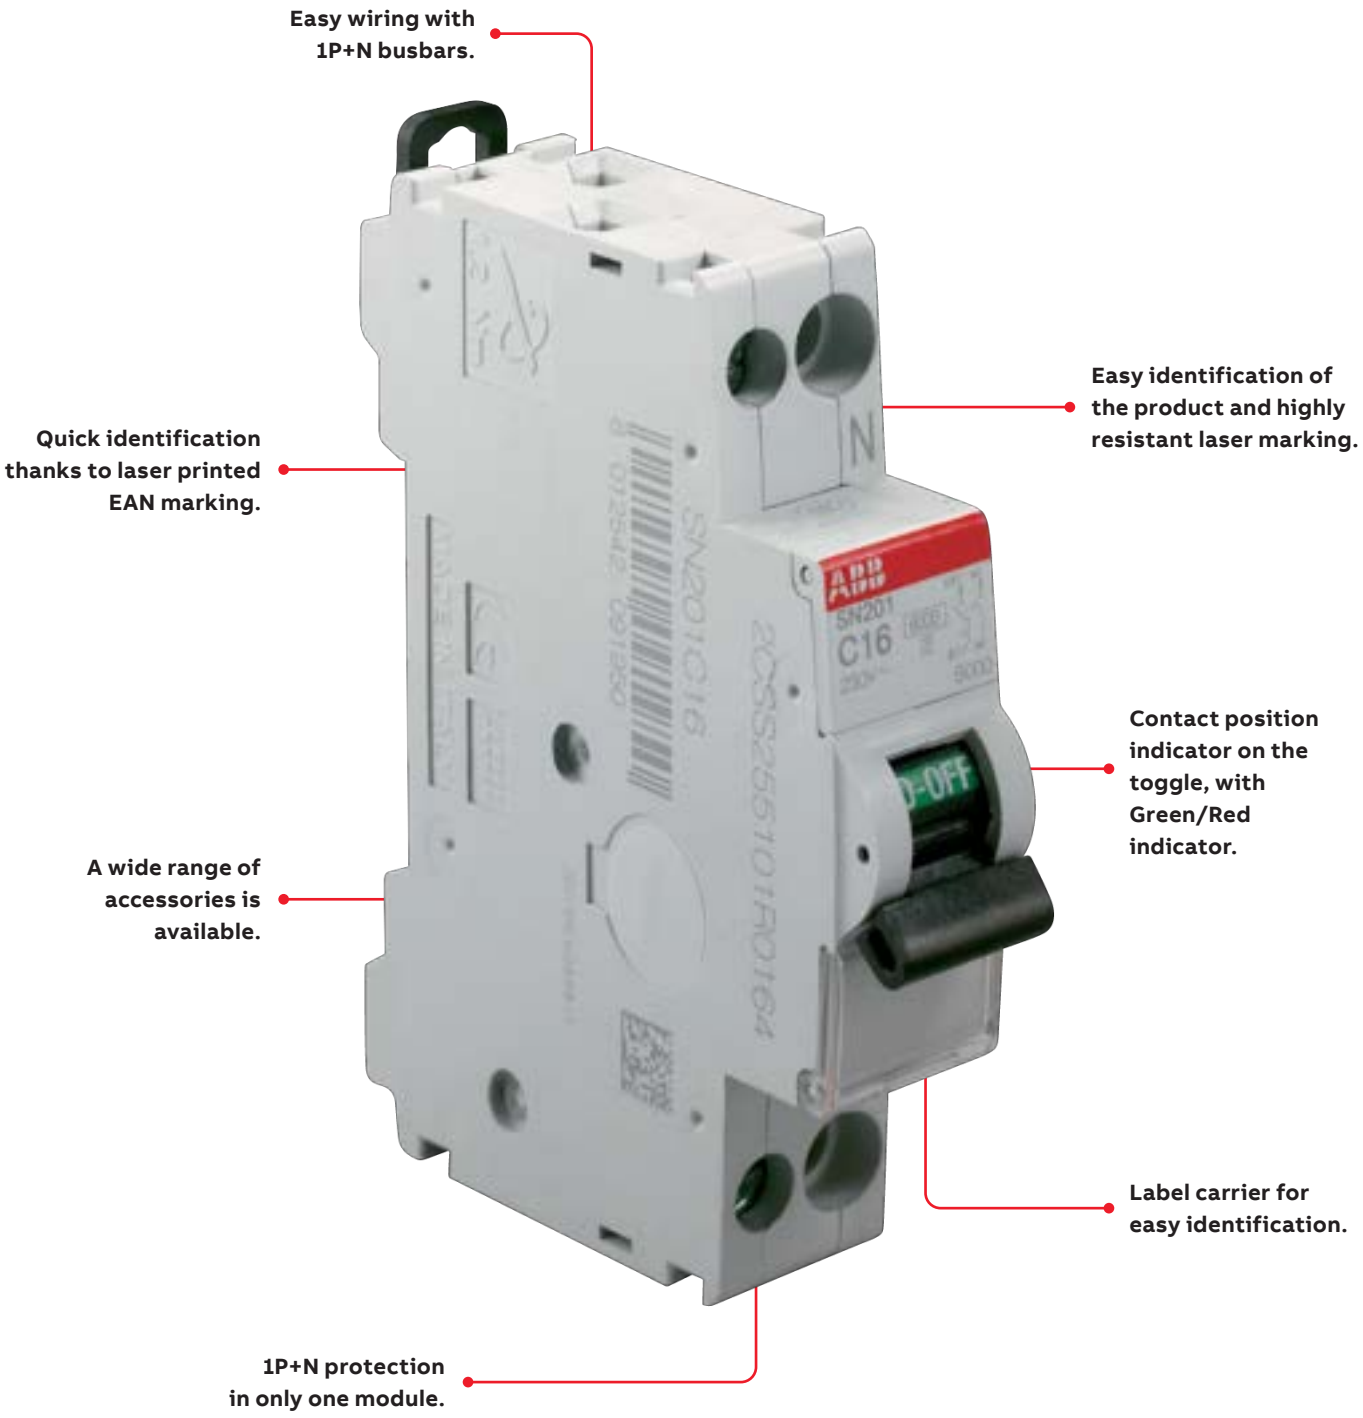

Space for insulated screwdrivers: the larger neutral hole allows the use of an insulated screwdriver to tighten the screws of both wire terminals, ensuring maximum safety of the operation.

Two bistable fixing devices for maximum ease of use: due to larger size of the DIN rail fixing system, made with 2 bistable fixing devices, the same screwdriver used for tightening the terminals can also be used for assembling and disassembling the device.

With the practical label carrier fitted in the SN201 circuit-breakers you can give maximum visibility to the information relating to the protected loads.

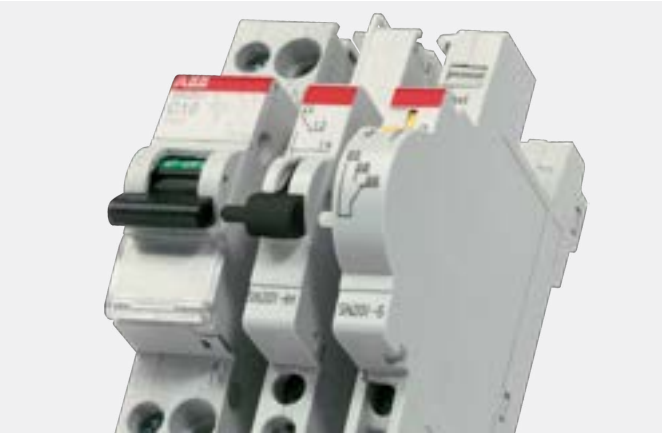

The SN201 fully integrates with the range of System pro M compact® miniature circuit-breakers, sharing the wide selection of accessories available through a dedicated interface (half module), which also can be used as auxiliary contact.

Miniature circuit-breakers

SN 201 series - 1P+N in one module housing

SN 201

General Data	Standards	
	Number of poles	
	Tripping characteristics	
	Rated current I_n	A
	Rated frequency f	Hz
	Rated insulation voltage U_i acc. to IEC/EN 60664-1	V
	Overvoltage category	
	Pollution degree	
Data acc. to IEC/EN 60898-1	Rated operational voltage U_e	V
	Max. power frequency recovery voltage (U_{max})	V
	Min. operating voltage	V
	Rated short-circuit capacity I_{cn}	kA
	Rated making and breaking capacity of one individual pole I_{cn1}	kA
	Energy limiting class (B, C characteritics)	
	Grid distance	mm
	Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)	kV
	Dielectric test voltage (at ind. freq. for 1 min.)	kV
	Reference temperature for tripping characteristics	°C
	Electrical endurance	cycles (OFF-ON-OFF)
Data acc. to IEC/EN 60947-2 (Only referring to internal short circuit test)	Rated ultimate short-circuit breaking capacity I_{cu}	kA
	Rated service short-circuit breaking capacity I_{cs}	kA
Mechanical Data	Housing type	
	Toggle type	
	Contact position indication	
	Protection degree acc. to EN 60529	
	Mechanical endurance	cycles (OFF-ON-OFF)
	Resistance to Shock acc. to IEC 60068-2-27	
	Resistance to Vibrations acc. to IEC 60068-2-6	
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH
	Ambient temperature (with daily average ≤ +35°C)	°C
	Storage temperature	°C
Installation	Terminal type (top/bottom)	
	Cross-section of conductors (top/bottom) Stranded / Solid	mm^2
	Cross-section of conductors (top/bottom) Flexible	mm^2
	Wire Stripping Length	mm
	Tightening torque	Nm
	Screwdriver	
	Mounting type	
	Mounting Position	
	Supply from	
Dimensions and weight	Pole dimensions (H x D x W)	mm
	Pole weight	g
Combination with aux. elements	Auxiliary contact	
	Auxiliary/Signal contact	
	Shunt trip	
	Undervoltage release	

*1 SN201 and SN201M series in B and D characteristic are available for rated current In ≥ 6 A

Miniature circuit-breakers

SN 201 series - 1P+N in one module housing

SN 201 L	SN 201	SN 201 M
IEC/EN 60898-1		
1P + N		
B, C	B, C, D	B, C
2…40 A *1		
50 / 60 Hz		
500 V AC		
III		
2		
230 V AC		
254 V AC		
12 V AC		
4.5 kA	6 kA	10 kA
4.5 kA	6 kA	6 kA
3		
35		
4 kV (test voltage 6,2kV at sea level, 5kV at 2000m)		
2 kV (50 / 60Hz)		
30°C		
10.000		
6 kA	10 kA	10 kA
4.5 kA	6 kA	7.5 kA
Insulation group II, RAL 7035		
Insulation group IIIA, black, sealable in ON/OFF positions		
Marking on toggle (I ON / 0 OFF)		
Housing: IP4X; Terminals: IP2X		
20000		
30 g - 2 shocks - 13 ms		
0.35mm or 5g - 20 cycles at 5…150…5 Hz without load		
28 cycles with 55°C/90-96% and 25°C/95-100%		
-25 … +55°C		
-40 … +70°C		
Fail-safe cage terminal		
16 mm^2 / 16 mm^2		
10 mm^2 / 10 mm^2		
11 mm		
1.2 Nm		
No. 2 Pozidrive		
On DIN rail 35 mm acc. to EN 60715 by fast clip		
any		
Top/Bottom terminals		
85 x 68.9 x 17.6 mm		
115		
Yes		
Yes		
Yes (with coupling interface)		
Yes (with coupling interface)		

MCBs

SN 201 L series B and C characteristic

SN 201 L

SN 201 L - B characteristic

Function: overload and short-circuit protection of circuits in final distribution; protection of long cable lengths in TN and IT systems.

Applications: residential.

Standard: IEC/EN 60898-1

Icn: 4.5 kA

Number of poles	Rated current In A	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+N	2	087359	SN201LB2	2CSS245101R0025		0.110	6
	4	087458	SN201LB4	2CSS245101R0045		0.110	6
	6	087557	SN201LB6	2CSS245101R0065		0.110	6
	10	087656	SN201LB10	2CSS245101R0105		0.110	6
	16	087755	SN201LB16	2CSS245101R0165		0.110	6
	20	087854	SN201LB20	2CSS245101R0205		0.110	6
	25	087953	SN201LB25	2CSS245101R0255		0.110	6
	32	088059	SN201LB32	2CSS245101R0325		0.110	6
	40	088158	SN201LB40	2CSS245101R0405		0.110	6

SN 201 L

SN 201 L - C characteristic

Function: overload and short-circuit protection of circuits in final distribution; protection of resistive and inductive loads with low inrush current.

Applications: residential.

Standard: IEC/EN 60898-1

Icn: 4.5 kA

Number of poles	Rated current In A	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+N	2	088257	SN201LC2	2CSS245101R0024		0.110	6
	4	088356	SN201LC4	2CSS245101R0044		0.110	6
	6	088455	SN201LC6	2CSS245101R0064		0.110	6
	10	088554	SN201LC10	2CSS245101R0104		0.110	6
	16	088653	SN201LC16	2CSS245101R0164		0.110	6
	20	088752	SN201LC20	2CSS245101R0204		0.110	6
	25	088851	SN201LC25	2CSS245101R0254		0.110	6
	32	088950	SN201LC32	2CSS245101R0324		0.110	6
	40	089056	SN201LC40	2CSS245101R0404		0.110	6

MCBs

SN 201 series B and C characteristic

SN 201

SN 201 - B characteristic

Function: overload and short-circuits protection of circuits in final distribution; protection of long cable lengths in TN and IT systems.

Applications: residential and commercial.

Standard: IEC/EN 60898-1

Icn: 6 kA

Number of poles	Rated current In A	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+N	6	090755	SN201B6	2CSS255101R0065		0.110	6
	10	090854	SN201B10	2CSS255101R0105		0.110	6
	13	743514	SN201B13	2CSS255101R0135		0.110	6
	16	090953	SN201B16	2CSS255101R0165		0.110	6
	20	091059	SN201B20	2CSS255101R0205		0.110	6
	25	091158	SN201B25	2CSS255101R0255		0.110	6
	32	091257	SN201B32	2CSS255101R0325		0.110	6
	40	091356	SN201B40	2CSS255101R0405		0.110	6

SN 201

SN 201 - C characteristic

Function: overload and short-circuit protection of circuits in final distribution; protection of resistive and inductive loads with low inrush current.

Applications: residential and commercial.

Standard: IEC/EN 60898-1

Icn: 6 kA

Number of poles	Rated current In A	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+N	2	091462	SN201C2	2CSS255101R0024		0.110	6
	3	130260	SN201C3	2CSS255101R0034		0.110	6
	4	091561	SN201C4	2CSS255101R0044		0.110	6
	6	091660	SN201C6	2CSS255101R0064		0.110	6
	10	091769	SN201C10	2CSS255101R0104		0.110	6
	13	091868	SN201C13	2CSS255101R0134		0.110	6
	16	091967	SN201C16	2CSS255101R0164		0.110	6
	20	092063	SN201C20	2CSS255101R0204		0.110	6
	25	092162	SN201C25	2CSS255101R0254		0.110	6
	32	092261	SN201C32	2CSS255101R0324		0.110	6
	40	092360	SN201C40	2CSS255101R0404		0.110	6

MCBs

SN 201 series D characteristic

SN 201

SN 201 - D characteristic

Function: protection and control of the circuits against overloads and short-circuits in final distribution; protection for circuits which supply loads with high inrush current at the circuit closing.

Applications: residential and commercial.

Standard: IEC/EN 60898-1

Icn: 6 kA

Number of poles	Rated current In A	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+N	6	092452	SN201D6	2CSS255101R0061		0.110	6
	10	092551	SN201D10	2CSS255101R0101		0.110	6
	16	092650	SN201D16	2CSS255101R0161		0.110	6
	20	092759	SN201D20	2CSS255101R0201		0.110	6
	25	092858	SN201D25	2CSS255101R0251		0.110	6
	32	092957	SN201D32	2CSS255101R0321		0.110	6
	40	093053	SN201D40	2CSS255101R0401		0.110	6

MCBs

SN 201 M series B and C characteristic

SN 201 M

SN 201 M - B characteristic

Function: overloads and short-circuit protection of circuits in final distribution; protection of long cable lengths in TN and IT systems.

Applications: residential and commercial.

Standard: IEC/EN 60898-1

Icn: 10 kA

Number of poles	Rated current In A	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+N	6	093152	SN201MB6	2CSS275101R0065		0.110	6
	10	093251	SN201MB10	2CSS275101R0105		0.110	6
	16	093350	SN201MB16	2CSS275101R0165		0.110	6
	20	093459	SN201MB20	2CSS275101R0205		0.110	6
	25	093558	SN201MB25	2CSS275101R0255		0.110	6
	32	093657	SN201MB32	2CSS275101R0325		0.110	6
	40	093756	SN201MB40	2CSS275101R0405		0.110	6

SN 201 M

SN 201 M - C characteristic

Function: overload and short-circuit protection of circuits in final distribution; protection of resistive and inductive loads with low inrush current.

Applications: residential and commercial.

Standard: IEC/EN 60898-1

Icn: 10 kA

Number of poles	Rated current In A	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1+N	2	093855	SN201MC2	2CSS275101R0024		0.110	6
	4	093954	SN201MC4	2CSS275101R0044		0.110	6
	6	094050	SN201MC6	2CSS275101R0064		0.110	6
	10	094159	SN201MC10	2CSS275101R0104		0.110	6
	16	094258	SN201MC16	2CSS275101R0164		0.110	6
	20	094357	SN201MC20	2CSS275101R0204		0.110	6
	25	094456	SN201MC25	2CSS275101R0254		0.110	6
	32	094555	SN201MC32	2CSS275101R0324		0.110	6
	40	094654	SN201MC40	2CSS275101R0404		0.110	6

S200C Compact MCBs

Save up to 50% more of space in the installation

Easy to install

- Supply possible either from top or bottom side, with cables or busbars.
- All screws are on the same level for a fast and easy installation

High performance clips
To facilitate the mounting and dismounting operation, guaranteeing an easy removal from a battery of device supplied with busbars

Laser printed information
Main technical information and product code are laser printed on the front side, visible also when the device is installed

Guaranteed security
Indication of the contacts status with I-0N/0-FF indication in green/red on the toggle

Dedicated space for QR CODE
Dedicated space for QR code with relevant product information

Combination with accessories
Possibility to mount signal and auxiliary contacts either on right or left side - compatibily with all System Pro M compact accssories through the news SCC-IH6R

S200C series
One-sight overview

1P+1P
1 module

2P
1 module

3P
2 modules

4P
2 modules

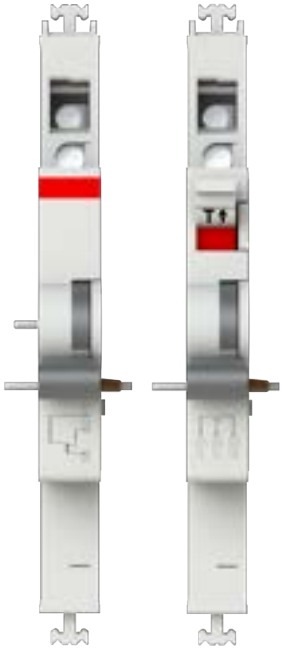

Auxiliary SCC
auxiliary contact
and signal contact

- **S2011C: 1P+1P in 1M** - 6 kA braking capacity, B and C char up to 20 A.
- **S202C: 2P in 1M** - From 4,5 kA to 10 kA breaking capacity, B and C char up to 40 A. Including a dedicated version for traction.
- **S203C: 3P in 2M** - 6 kA breaking capacity, B and C char up to 32 A.
- **S204C: 4P in 2M** - 6 kA breaking capacity, B and C char up to 32 A.
- **SCC-IH6R auxiliary contact, SCC-S6R signal contact**

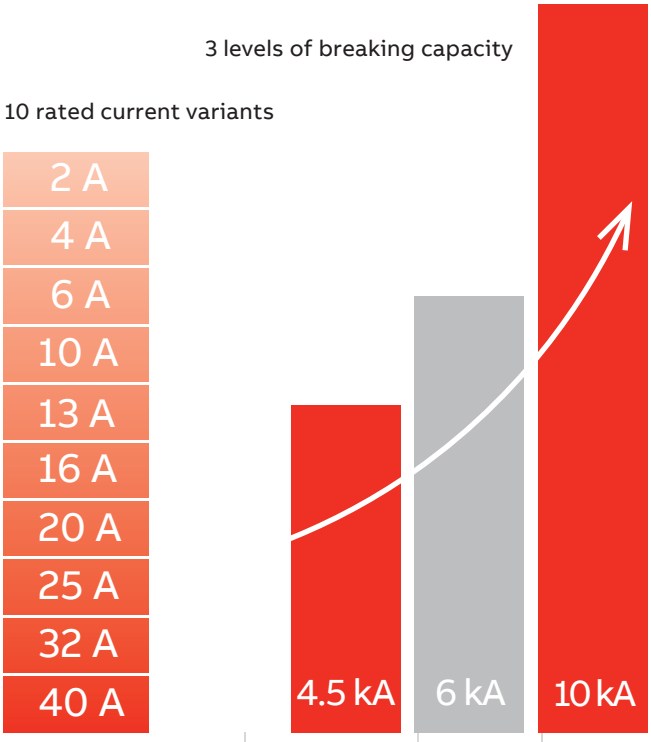

MCBs

S2011C - Technical features

			S2011C
Standards			IEC/EN 60898-1
Electrical features			
Number of poles			1P+1P
Number of modules			1M
Tripping Characteristic			B, C
Rated current I_n		A	$1 \le I_n \le 20$
Rated operational voltage U_e		V	240
Rated insulation voltage U_i acc. to IEC/EN 60664-1		V	500 V AC
Overvoltage category			III
Pollution degree			2
Rated frequency f		Hz	50/60
Min operating voltage		V AC/DC	12
Max operating voltage		V AC	264
		V DC	48
Rated short-circuit capacity acc. to IEC/EN 60898-1	I_{cn}	A	6000
Rated short circuit breaking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate I_{cu}	kA	6
	service I_{cs}	kA	6
Rated making and breaking capacity of one individual pole	I_{cn1}	A	6000
Rated short circuit breaking capacity acc. to IEC/EN 60947-2 in DC (only referring to internal short circuit test, tc 4ms)	ultimate I_{cu}	kA	6 kA @ 48 VDC
Grid distance		mm	35
Rated impulse withstand voltage (1.2/50µs) U_{imp}		kV	4 kV
Dielectric test voltage at ind. freq. for 1 min.		kV	2.5 kV (50 / 60Hz, 1 min.)
Energy limiting class			3
Mechanical features			
Housing type			Insulation group I, RAL 7035
Toggle type			Insulation group II, Black RAL 9005, sealable in ON-OFF positions
Electrical endurance		cycles (OFF-ON-OFF)	7000
Mechanical endurance		cycles (OFF-ON-OFF)	7000
Contact position indication (CPI)			Marking on toggle (I ON / 0 OFF)
Protection degree acc. to EN 60529	housing		IP40
	terminals		IP20
Resistance to Shock acc. to IEC 60068-2-27			40 g (x,y,z) - 18 shocks - 5ms half sinusoidal
Resistance to Vibrations acc. to IEC 60068-2-6			0.35 mm or 5g - 20 cycles at 5…150…5 Hz
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55 °C/90–96 % and 25 °C/95–100 %
Reference temperature for tripping characteristics		°C	30
Ambient temperature (with daily average ≤ +35 °C)		°C	-25…+55
Storage temperature		°C	-40…+70
Installation			
Terminal type	top / bottom		Fail-safe cage terminal
Cross-section of conductors (Solid/ Stranded)	top / bottom	mm^2	16/16
Cross-section of conductors (Flexible)	top / bottom	mm^2	10/10
Cross-section of busbars	top / bottom	mm^2	10/10
Tightening torque	top / bottom	Nm	1,2
Wire Stripping Length		mm	10
Screwdriver			No. 2 Pozidrive
Mounting type			on DIN rail EN 60715 (35 mm) by means of mounting clip
Mounting position			Vertical & Horizontal
Supply from			Top/Bottom terminals
Dimensions and weight			
Dimensions (H×D×W)		mm	85 x 69 x 17,6 mm
Weight		g	120
Combination with auxiliary elements			
Combinable with accessories and auxiliaries			YES, SCC-IH6R, SCC-S6R

MCBs

S202C - Technical features

			S202C L	S202C	S202C M
Standards					
Electrical features					
Number of poles			2P	2P	2P
Number of modules			1M	1M	1M
Tripping Characteristic			B, C	B, C	B, C
Rated current I_n		A	$2 \le I_n \le 40$	$2 \le I_n \le 40$	$2 \le I_n \le 32$
Rated operational voltage U_e		V	240	240	240
Rated insulation voltage U_i acc. to IEC/EN 60664-1		V	500 V AC	500 V AC	500 V AC
Overvoltage category			III	III	III
Pollution degree			2	2	2
Rated frequency f		Hz	50/60	50/60	50/60
Min operating voltage		V AC/DC	12	12	12
Max operating voltage		V AC	253	253	253
		V DC	110	110	110
Rated short-circuit capacity acc. to IEC/EN 60898-1	I_{cn}	A	4500	6000	10000
Rated short circuit breking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate I_{cu}	kA	6	10	10
	service I_{cs}	kA	4.5	6	7.5
Rated making and breaking capacity of one individual pole	I_{cn1}	A	4500	6000	6000
Rated short circuit breaking capacity acc. to IEC/EN 60947-2 in DC (only referring to internal short circuit test, tc 4ms)	ultimate I_{cu}	kA	4.5 kA @ 110 VDC	6 kA @ 110 VDC	-
Grid distance		mm	35	35	60
Rated impulse withstand voltage (1.2/50µs) U_{imp}		kV	4 kV	4 kV	4 kV
Dielectric test voltage at ind. freq. for 1 min.		kV	2.5 kV (50 / 60Hz, 1 min.)	2.5 kV (50 / 60Hz, 1 min.)	2.5 kV (50 / 60Hz, 1 min.)
Energy limiting class				3	
Mechanical features					
Housing type				Insulation group I, RAL 7035	
Toggle type				Insulation group II, Black RAL 9005, sealable in ON-OFF positions	
Electrical endurance		cycles (OFF-ON-OFF)		7000	
Mechanical endurance		cycles (OFF-ON-OFF)		7000	
Contact position indication (CPI)				Marking on toggle (I ON / 0 OFF)	
Protection degree acc. to EN 60529	housing			IP40	
	terminals			IP20	
Resistance to Shock acc. to IEC 60068-2-27				40 g (x,y,z) - 18 shocks - 5 ms half sinusoidal	
Resistance to Vibrations acc. to IEC 60068-2-6				0.35 mm or 5 g - 20 cycles at 5…150…5 Hz	
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH		28 cycles with 55 °C/90–96 % and 25 °C/95–100 %	
Reference temperature for tripping characteristics		°C		30	
Ambient temperature (with daily average ≤ +35 °C)		°C		-25…+55	
Storage temperature		°C		-40…+70	
Installation					
Terminal type	top / bottom			Fail-safe cage terminal	
Cross-section of conductors (Solid/ Stranded)	top / bottom	mm^2		16/16	
Cross-section of conductors (Flexible)	top / bottom	mm^2		10/10	
Cross-section of busbars	top / bottom	mm^2		10/10	
Tightening torque	top / bottom	Nm		1,2	
Wire Stripping Length		mm		10	
Screwdriver				No. 2 Pozidrive	
Mounting type				on DIN rail EN 60715 (35 mm) by means of mounting clip	
Mounting position				Vertical & Horizontal	
Supply from				Top/Bottom terminals	
Dimensions and weight					
Dimensions (H×D×W)		mm		85 x 69 x 17,6 mm	
Weight		g		125	
Combination with auxiliary elements					
Combinable with accessories and auxiliaries				YES, SCC-IH6R, SCC-S6R	

MCBs

S203C - Technical features

			S203C
Standards			IEC/EN 60898-1
Electrical features			
Number of poles			3P
Number of modules			2M
Tripping Characteristic			B, C
Rated current I_n		A	$2 \le I_n \le 32$
Rated operational voltage U_e		V	415
Rated insulation voltage U_i acc. to IEC/EN 60664-1		V	500 V AC
Overvoltage category			III
Pollution degree			2
Rated frequency f		Hz	50/60
Min operating voltage		V AC/DC	12
Max operating voltage		V	440
Rated short-circuit capacity acc. to IEC/EN 60898-1	I_{cn}	A	6000
Rated short circuit breking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate I_{cu}	kA	6
	service I_{cs}	kA	6
Rated making and breaking capacity of one individual pole	I_{cn1}	A	4500
Rated short circuit breaking capacity acc. to IEC/EN 60947-2 in DC (only referring to internal short circuit test, tc 4ms)	ultimate I_{cu}	kA	NA
Grid distance		mm	35
Rated impulse withstand voltage (1.2/50µs) U_{imp}		kV	4 kV
Dielectric test voltage at ind. freq. for 1 min.		kV	2.5 kV (50 / 60Hz, 1 min.)
Energy limiting class			3
Mechanical features			
Housing type			Insulation group I, RAL 7035
Toggle type			Insulation group II, Black RAL 9005, sealable in ON-OFF positions
Electrical endurance		cycles (OFF-ON-OFF)	7000
Mechanical endurance		cycles (OFF-ON-OFF)	7000
Contact position indication (CPI)			Marking on toggle (I ON / 0 OFF)
Protection degree acc. to EN 60529	housing		IP40
	terminals		IP20
Resistance to Shock acc. to IEC 60068-2-27			40 g (x,y,z) - 18 shocks - 5 ms half sinusoidal
Resistance to Vibrations acc. to IEC 60068-2-6			0.35 mm or 5 g - 20 cycles at 5…150…5 Hz
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55 °C/90–96 % and 25 °C/95–100 %
Reference temperature for tripping characteristics		°C	30
Ambient temperature (with daily average ≤ +35 °C)		°C	-25…+55
Storage temperature		°C	-40…+70
Installation			
Terminal type	top / bottom		Fail-safe cage terminal
Cross-section of conductors (Solid/ Stranded)	top / bottom	mm^2	16/16
Cross-section of conductors (Flexible)	top / bottom	mm^2	10/10
Cross-section of busbars	top / bottom	mm^2	10/10
Tightening torque	top / bottom	Nm	1,2
Wire Stripping Length		mm	10
Screwdriver			No. 2 Pozidrive
Mounting type			on DIN rail EN 60715 (35 mm) by means of mounting clip
Mounting position			Vertical & Horizontal
Supply from			Top/Bottom terminals
Dimensions and weight			
Dimensions (H×D×W)		mm	85 x 69 x 35,4 mm
Weight		g	190
Combination with auxiliary elements			
Combinable with accessories and auxiliaries			YES, SCC-IH6R, SCC-IH6L

MCBs

S204C - Technical features

			S204C
Standards			IEC/EN 60898-1
Electrical features			
Number of poles			4P
Number of modules			2M
Tripping Characteristic			B, C
Rated current I_n		A	$2 \le I_n \le 32$
Rated operational voltage U_e		V	415
Rated insulation voltage U_i acc. to IEC/EN 60664-1		V	500 V AC
Overvoltage category			III
Pollution degree			2
Rated frequency f		Hz	50/60
Min operating voltage		V AC/DC	12
Max operating voltage		V AC	440
		V DC	220
Rated short-circuit capacity acc. to IEC/EN 60898-1	I_{cn}	A	6000
Rated short circuit breking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate I_{cu}	kA	6
	service I_{cs}	kA	6
Rated making and breaking capacity of one individual pole	I_{cn1}	A	4500
Rated short circuit breaking capacity acc. to IEC/EN 60947-2 in DC (only referring to internal short circuit test, tc 4ms)	ultimate I_{cu}	kA	6kA @ 220 VDC
Grid distance		mm	35
Rated impulse withstand voltage (1.2/50µs) U_{imp}		kV	4 kV
Dielectric test voltage at ind. freq. for 1 min.		kV	2.5 kV (50 / 60Hz, 1 min.)
Energy limiting class			3
Mechanical features			
Housing type			Insulation group I, RAL 7035
Toggle type			Insulation group II, Black RAL 9005, sealable in ON-OFF positions
Electrical endurance		cycles (OFF-ON-OFF)	7000
Mechanical endurance		cycles (OFF-ON-OFF)	7000
Contact position indication (CPI)			Marking on toggle (I ON / 0 OFF)
Protection degree acc. to EN 60529	housing		IP40
	terminals		IP20
Resistance to Shock acc. to IEC 60068-2-27			40 g (x,y,z) - 18 shocks - 5 ms half sinusoidal
Resistance to Vibrations acc. to IEC 60068-2-6			0.35 mm or 5 g - 20 cycles at 5…150…5 Hz
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55 °C/90–96 % and 25 °C/95–100 %
Reference temperature for tripping characteristics		°C	30
Ambient temperature (with daily average ≤ +35 °C)		°C	-25…+55
Storage temperature		°C	-40…+70
Installation			
Terminal type	top / bottom		Fail-safe cage terminal
Cross-section of conductors (Solid/ Stranded)	top / bottom	mm^2	16/16
Cross-section of conductors (Flexible)	top / bottom	mm^2	10/10
Cross-section of busbars	top / bottom	mm^2	10/10
Tightening torque	top / bottom	Nm	1,2
Wire Stripping Length		mm	10
Screwdriver			No. 2 Pozidrive
Mounting type			on DIN rail EN 60715 (35 mm) by means of mounting clip
Mounting position			Vertical & Horizontal
Supply from			Top/Bottom terminals
Dimensions and weight			
Dimensions (H×D×W)		mm	85 x 69 x 35,4 mm
Weight		g	250
Combination with auxiliary elements			
Combinable with accessories and auxiliaries			YES, SCC-IH6R, SCC-IH6L

MCBs

S200C Compact MCBs - Ordering data

S2011C

S2011C: 1P+1P in 1M
Function: protection and control of the circuits against overloads and short-circuits
Applications: residential, commercial
Standard: IEC/EN 60898-1

Number of poles	Breaking capacity	Tripping Char.	Rated Current I_n A	Bbn 8012542 EAN	Order details		Weight 1 piece kg	Pack unit pc.
					Type code	Order code		
1P+1P	6kA	B	2	731559	S2011C-B2	2CSS257420R0025	0,120	6
			4	731658	S2011C-B4	2CSS257420R0045	0,120	6
			6	731757	S2011C-B6	2CSS257420R0065	0,120	6
			10	731856	S2011C-B10	2CSS257420R0105	0,120	6
			13	731955	S2011C-B13	2CSS257420R0135	0,120	6
			16	732051	S2011C-B16	2CSS257420R0165	0,120	6
			20	732150	S2011C-B20	2CSS257420R0205	0,120	6
		C	1	732259	S2011C-C1	2CSS257420R0014	0,120	6
			2	732358	S2011C-C2	2CSS257420R0024	0,120	6
			4	732457	S2011C-C4	2CSS257420R0044	0,120	6
			6	732556	S2011C-C6	2CSS257420R0064	0,120	6
			10	732655	S2011C-C10	2CSS257420R0104	0,120	6
			13	732754	S2011C-C13	2CSS257420R0134	0,120	6
			16	732853	S2011C-C16	2CSS257420R0164	0,120	6
			20	732952	S2011C-C20	2CSS257420R0204	0,120	6

MCBs

S200C Compact MCBs - Ordering data

S202CM

S202C: 2P in 1M

Function: protection and control of the circuits against overloads and short-circuits

Applications: residential, commercial

Standard: IEC/EN 60898-1

Number of poles	Breaking capacity	Tripping Char.	Rated Current I_n A	Bbn 8012542 EAN	Order details		Weight 1 piece kg	Pack unit pc.
					Type code	Order code		
2P	4,5kA	C	2	733058	S202CL-C2	2CSS242420R0024	0,125	6
			4	733157	S202CL-C4	2CSS242420R0044	0,125	6
			6	733256	S202CL-C6	2CSS242420R0064	0,125	6
			10	733355	S202CL-C10	2CSS242420R0104	0,125	6
			16	733454	S202CL-C16	2CSS242420R0164	0,125	6
			20	733553	S202CL-C20	2CSS242420R0204	0,125	6
			25	733652	S202CL-C25	2CSS242420R0254	0,125	6
			32	733751	S202CL-C32	2CSS242420R0324	0,125	6
			40	733850	S202CL-C40	2CSS242420R0404	0,125	6
	6kA	B	2	733959	S202C-B2	2CSS252420R0025	0,125	6
			4	734055	S202C-B4	2CSS252420R0045	0,125	6
			6	734154	S202C-B6	2CSS252420R0065	0,125	6
			10	734253	S202C-B10	2CSS252420R0105	0,125	6
			13	734352	S202C-B13	2CSS252420R0135	0,125	6
			16	734451	S202C-B16	2CSS252420R0165	0,125	6
			20	734550	S202C-B20	2CSS252420R0205	0,125	6
			25	734659	S202C-B25	2CSS252420R0255	0,125	6
			32	734758	S202C-B32	2CSS252420R0325	0,125	6
			40	734857	S202C-B40	2CSS252420R0405	0,125	6
		C	2	734956	S202C-C2	2CSS252420R0024	0,125	6
			4	735052	S202C-C4	2CSS252420R0044	0,125	6
			6	735151	S202C-C6	2CSS252420R0064	0,125	6
			10	735250	S202C-C10	2CSS252420R0104	0,125	6
			13	735359	S202C-C13	2CSS252420R0134	0,125	6
			15	735458	S202C-C15	2CSS252420R0154	0,125	6
			16	735557	S202C-C16	2CSS252420R0164	0,125	6
			20	735656	S202C-C20	2CSS252420R0204	0,125	6
			25	735755	S202C-C25	2CSS252420R0254	0,125	6
			32	735854	S202C-C32	2CSS252420R0324	0,125	6
			40	735953	S202C-C40	2CSS252420R0404	0,125	6
	10kA	B	2	737056	S202CM-B2	2CSS272420R0025	0,125	6
			4	737155	S202CM-B4	2CSS272420R0045	0,125	6
			6	737254	S202CM-B6	2CSS272420R0065	0,125	6
			10	737353	S202CM-B10	2CSS272420R0105	0,125	6
			13	737452	S202CM-B13	2CSS272420R0135	0,125	6
			16	737551	S202CM-B16	2CSS272420R0165	0,125	6
			20	737650	S202CM-B20	2CSS272420R0205	0,125	6
			25	737759	S202CM-B25	2CSS272420R0255	0,125	6
			32	737858	S202CM-B32	2CSS272420R0325	0,125	6
		C	2	736059	S202CM-C2	2CSS272420R0024	0,125	6
			4	736158	S202CM-C4	2CSS272420R0044	0,125	6
			6	736257	S202CM-C6	2CSS272420R0064	0,125	6
			10	736356	S202CM-C10	2CSS272420R0104	0,125	6
			13	736455	S202CM-C13	2CSS272420R0134	0,125	6
			15	736554	S202CM-C15	2CSS272420R0154	0,125	6
			16	736653	S202CM-C16	2CSS272420R0164	0,125	6
			20	736752	S202CM-C20	2CSS272420R0204	0,125	6
			25	736851	S202CM-C25	2CSS272420R0254	0,125	6
			32	736950	S202CM-C32	2CSS272420R0324	0,125	6

MCBs

S200C Compact MCBs - Ordering data

S203C

S203C: 3P in 2M
Function: protection and control of the circuits against overloads and short-circuits
Applications: residential, commercial, industrial
Standard: IEC/EN 60898-1

Number of poles	Breaking capacity	Tripping Char.	Rated Current I_n A	Bbn 8012542 EAN	Order details		Weight 1 piece kg	Pack unit pc.
					Type code	Order code		
3P	6kA	B	6	737957	S203C-B6	2CSS253420R0065	0,190	1
			10	738053	S203C-B10	2CSS253420R0105	0,190	1
			16	738152	S203C-B16	2CSS253420R0165	0,190	1
			20	738251	S203C-B20	2CSS253420R0205	0,190	1
			25	738350	S203C-B25	2CSS253420R0255	0,190	1
			32	738459	S203C-B32	2CSS253420R0325	0,190	1
		C	6	738558	S203C-C6	2CSS253420R0064	0,190	1
			10	738657	S203C-C10	2CSS253420R0104	0,190	1
			16	738756	S203C-C16	2CSS253420R0164	0,190	1
			20	738855	S203C-C20	2CSS253420R0204	0,190	1
			25	738954	S203C-C25	2CSS253420R0254	0,190	1
			32	739050	S203C-C32	2CSS253420R0324	0,190	1

MCBs

S200C Compact MCBs - Ordering data

S204C

S204C: 4P in 2M

Function: protection and control of the circuits against overloads and short-circuits

Applications: residential, commercial, industrial

Standard: IEC/EN 60898-1

Number of poles	Breaking capacity	Tripping Char.	Rated Current I_n A	Bbn 8012542 EAN	Order details		Weight 1 piece kg	Pack unit pc.
					Type code	Order code		
4P	6kA	B	6	739159	S204C-B6	2CSS254420R0065	0,240	1
			10	739258	S204C-B10	2CSS254420R0105	0,240	1
			16	739357	S204C-B16	2CSS254420R0165	0,240	1
			20	739456	S204C-B20	2CSS254420R0205	0,240	1
			25	739555	S204C-B25	2CSS254420R0255	0,240	1
			32	739654	S204C-B32	2CSS254420R0325	0,240	1
		C	6	739753	S204C-C6	2CSS254420R0064	0,240	1
			10	739852	S204C-C10	2CSS254420R0104	0,240	1
			16	739951	S204C-C16	2CSS254420R0164	0,240	1
			20	740056	S204C-C20	2CSS254420R0204	0,240	1
			25	740155	S204C-C25	2CSS254420R0254	0,240	1
			32	740254	S204C-C32	2CSS254420R0324	0,240	1

MCBs

S 200 80A-100A series technical features

S 200 80-100A

	S 200 80A-100A
General Data	
Standards	IEC/EN 60898-1, IEC/EN 60947-2
Poles	1P, 2P, 3P, 4P, 1P+N, 3P+N
Tripping characteristics	B, C
Rated current I_n	80 A, 100 A
Rated frequency f	50/60 Hz
Rated insulation voltage Ui acc. to IEC/EN 60664-1 (VDE 0110-1)	440 V AC
Overvoltage category	III
Pollution degree	3
IEC/EN 60898-1	
Rated operational voltage U_n	1P: 230/400 V AC; 1P+N: 230 V AC; 2P, 3P, 4P, 3P+N: 400 V AC
Max. power frequency recovery voltage U_{max}	1P: 253/440 V AC; 1P+N: 253 V AC; 2P, 3P, 4P, 3P+N: 440 V AC
Min. operating voltage	12 V AC
Rated short-circuit capacity I_{cn}	6 kA
Grid distance	35
Rated impulse withstand voltage U_{imp} (1.2/50µs)	4 kV (test voltage 6.2 kV at sea level, 5 kV at 2,000 m)
Dielectrical test voltage	2 kV (50/60 Hz, 1 min.)
Reference temperature for tripping characteristics	B, C: 30 °C
Electrical endurance cycles (OFF-ON-OFF)	10,000 ops. (AC); one cycle 2 s - ON, 28 s - OFF
IEC/EN 60947-2	
Rated operational voltage U_e	1P, 1P+N: 230 V AC; 2P, 3P, 4P, 3P+N: 400 V AC; 1P: 60V DC; 2P: 110V DC
Max. power frequency recovery voltage U_{max}	1P, 1P+N: 253 V AC; 2P, 3P, 4P, 3P+N: 440 V AC; 1P: 60V DC; 2P: 110V DC
Min. operating voltage	12 V AC
Rated ultimate short-circuit breaking capacity I_{cu}	6 kA
Rated service short-circuit breaking capacity I_{cs}	6 kA
Rated impulse withstand voltage U_{imp} (1.2/50 µs)	4 kV (test voltage 6.2 kV at sea level, 5 kV at 2,000 m)
Dielectrical test voltage	2 kV (50/60 Hz, 1 min.)

MCBs

S 200 80A-100A series technical features

S 200 80-100A

Reference temperature for tripping characteristics	B, C: 55 °C
Electrical endurance	10,000 ops. (AC); one cycle 2 s - ON, 28 s - OFF
Mechanical data	
Housing	Insulation group I, RAL 7035
Toggle	Insulation group II, black, sealable
Contact position indication	Real CPI (red ON/green OFF)
Protection degree acc. to DIN EN 60529	IP20[1)], IP40 in enclosure with cover
Mechanical endurance cycles (OFF-ON-OFF)	20,000 ops.
Shock resistance acc. to DIN EN 60068-2-27	25 g, 2 shocks, 13 ms
Vibration resistance acc. to DIN EN 60068-2-6	5 g, 20 cycles at 5…150…5 Hz at 0.8 I_n
Environmental conditions (Damp heat cyclic) acc. to DIN EN 60068-2-30	28 cycles with 55 °C/90-96 % and 25 °C/95-100 %
Ambient temperature	-25 ... +55 °C
Storage temperature	-40 ... +70 °C
	S 200 80A-100A
Installation	
Terminal	Failsafe bi-directional cache clamp
Cross-section of conductors (top/bottom)	solid, stranded: 50 mm^2 / 50 mm^2 flexible: 50 mm^2 / 50 mm^2
Cross-section of busbars (top/bottom)	16 mm^2 / 16 mm^2
Torque	3.0 Nm
Screwdriver	Nr. 2 Pozidriv
Mounting	On DIN rail 35 mm acc. to EN 60715 by fast clip
Mounting position	any
Supply	any
Dimensions and weight	
Mounting dimensions acc. to DIN 43880	Mounting dimension 1
Pole dimensions (H x T x B)	88.8 x 69 x 17.5
Pole weight	approx. 126 g
Combination with auxiliary elements	
Auxiliary contact	Yes
Signal/auxiliary contact	Yes
Shunt trip	Yes
Undervoltage release	Yes
Motor Operating Device	Yes

MCBs

S 200 80A-100A

S 201 80-100A

S 202 80-100A

S 203 80-100A

S 204 80-100A

S 201 80-100A NA

S 203 80-100A NA

The miniature circuit breakers of the System pro M compact® series S 200 provide state-of-the-art safety and comfort. They stand out due to their high performance and the wide range of accessories and approvals.

The additional electrical currents 80 A and 100 A complement the current portfolio of the System pro M compact® and offer maximum performance in a single module width.

- Clear contact position indication in red/green (“real CPI”)
- Unique, patented twin terminal with captive screws and an increased opening for cables up to max. 50 mm², finger-proof (IP20)
- Busbar slot in the back for best visibility during installation
- High performance in building installations and industrial applications up to 6 kA at Ue = 400 V AC acc. to IEC/EN 60947-2 and IEC/EN 60898-1
- Individual product identification code
- Approved acc. to IEC/EN 60898-1 and IEC/EN 60947-2 for global use

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
B characteristic							
1	80	916516	S201-B80	2CDS251001R0805		0.128	10
	100	916530	S201-B100	2CDS251001R0825		0.128	10
2	80	916677	S202-B80	2CDS252001R0805		0.256	5
	100	916691	S202-B100	2CDS252001R0825		0.256	5
3	80	916271	S203-B80	2CDS253001R0805		0.384	1
	100	916295	S203-B100	2CDS253001R0825		0.384	1
4	80	916431	S204-B80	2CDS254001R0805		0.512	1
	100	916455	S204-B100	2CDS254001R0825		0.512	1
1+NA	80	916592	S201-B80NA	2CDS251103R0805		0.256	5
	100	916615	S201-B100NA	2CDS251103R0825		0.256	5
3+NA	80	916356	S203-B80NA	2CDS253103R0805		0.512	1
	100	916370	S203-B100NA	2CDS253103R0825		0.512	1
C characteristic							
1	80	916509	S201-C80	2CDS251001R0804		0.128	10
	100	916523	S201-C100	2CDS251001R0824		0.128	10
2	80	916660	S202-C80	2CDS252001R0804		0.256	5
	100	916684	S202-C100	2CDS252001R0824		0.256	5
3	80	916264	S203-C80	2CDS253001R0804		0.384	1
	100	916288	S203-C100	2CDS253001R0824		0.384	1
4	80	916424	S204-C80	2CDS254001R0804		0.512	1
	100	916448	S204-C100	2CDS254001R0824		0.512	1
1+NA	80	916585	S201-C80NA	2CDS251103R0804		0.256	5
	100	916608	S201-C100NA	2CDS251103R0824		0.256	5
3+NA	80	916349	S203-C80NA	2CDS253103R0804		0.512	1
	100	916363	S203-C100NA	2CDS253103R0824		0.512	1

MCBs

S 200 MT series technical features

S 200 MT

			S 200 MT
General Data	Standards		IEC/EN 60898-1, IEC/EN 60947-2 UL 1077, CSA 22.2 No. 235 GB/T 14048.2, GB/T 10963.1
	Poles		1P, 2P, 3P, 4P, 1P+N, 3P+N
	Tripping characteristics		B, C, D, K, Z
	Rated current I_n		from 0.2 … 63 A
	Rated frequency f		50 / 60 Hz
	Rated insulation voltage Ui acc. to IEC/EN 60664-1		440 V AC
	Overvoltage category		III
	Pollution degree		3
	Electrical endurance	ops.	I_n < 32A: 20,000 ops (AC), I_n ≥ 32A: 10,000 ops. (AC); 1,000 ops. (DC); 1 cycle (2s - ON, 13s - OFF, I_n ≤ 32A), 1 cyle (2s - ON, 28s - OFF, I_n > 32A)
Data acc. to IEC/EN 60947-2	Rated operational voltage U_n		1P: 230 V AC; 1P+N: 230 V AC ; 2...4P: 440 V AC; 3P+N: 440 V AC
	Max. power frequency recovery voltage (U_{max})		1P: 253 V AC; 1P+N: 253 V AC; 2P...4P: 462 V AC; 3P+N: 462 V AC; 1P: 72 V DC; 2P: 125 V DC
	Min. operating voltage		12 V AC - 12 V DC
	Rated ultimate short-circuit breaking capacity I_{cn}		15 kA
	Rated service short-circuit breaking capacity I_{cn}		≤ 40 A: 11.2 kA 50, 63 A: 7.5 kA
	Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)		4 kV (test voltage 6.2 kV at sea level, 5 kV at 2,000 m)
	Dielectric test voltage		2 kV (50 / 60 Hz, 1 min.)
	Reference temperature for tripping characteristics		B, C, D: 30°C K, Z: 55°C
Data acc. to IEC/EN 60898-1	Rated operational voltage U_n		1P: 230/400 V AC; 1P+N: 230 V AC ; 2...4P: 400 V AC; 3P+N: 400 V AC
	Max. power frequency recovery voltage (U_{max})		1P: 253 V AC; 1P+N: 253 V AC; 2P: 440 V AC; 3...4P: 440 V AC; 3P+N: 440 V AC;
	Min. operating voltage		12 V AC - 12 V DC
	Rated short-circuit capacity I_{cn}		10 kA
	Energy limiting class (B, C up to 40 A)		3
	Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)		4 kV (test voltage 6.2 kV at sea level, 5 kV at 2,000 m)
	Dielectric test voltage		2 kV (50 / 60 Hz, 1 min.)
	Reference temperature for tripping characteristics		B, C, D: 30 °C
Data acc. to UL1077/CSA 22.2 No. 235	Rated voltage		1 P: 277 V AC; 2…4 P: 277 V / 480Y 1P: 60 V DC; 2P…4P: 125 V DC
	Rated interrupting capacity acc. to UL 1077		6 kA AC; 10 kA DC
	Short-circuit current rating acc. to UL 489		--
	Application		Suppl. prot. for general use. Application Codes: TC2, OL0, SC: U1
	Reference temperature for tripping characteristics		B, C, D, K, Z: 25 °C
	Electrical endurance	ops.	6,000 ops (AC), 6,000 ops. (DC); 1 cycle (1 s - ON, 9 s - OFF)

MCBs

S 200 MT series technical features

S 200 MT

			S 200 MT
Mechanical Data	Housing		Insulation group I, RAL 7035
	Toggle		Insulation group II, black, sealable
	Contact position indication		Real CPI (green OFF / red ON)
	Protection degree acc. to EN 60529		IP20, IP40 in enclosure with cover
	Mechanical endurance	ops.	20,000 ops.
	Shock resistance acc. to IEC/EN 60068-2-27		25g - 2 shocks - 13 ms
	Vibration resistance acc. to IEC/EN 60068-2-6		5 g - 20 cycles at 5 ... 150 ... 5 Hz with load 0.8 I_n
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	28 cycles with 55 °C/90-96 % and 25 °C/95-100 %
	Ambient temperature		-40 ... +70 °C the average temperature during a day is not exceeding +35°C
	Storage temperature		-40 ... +70 °C
Installation	Terminal		Failsafe bi-directional cylinder-lift terminal
	Cross-section of conductors (top/bottom)		
	Solid / Stranded		0.75 ... 35 mm^2
	Flexible		0.75 ... 25 mm^2
	Solid / Stranded		18 - 10 AWG
	Flexible		18 - 4 AWG
	Cross-section of busbars (top/bottom)		10 / 10 mm^2
			14 - 8 AWG
	Tightening Torque		2.8 Nm
			18 in-lbs.
	Screwdriver		No. 2 Pozidrive
	Mounting		on DIN rail 35 mm acc. to EN 60715 by fast clip
	Mounting position		any
	Supply		optional
Dimensions and weight	Mounting dimensions acc. to DIN 43880		Mounting dimension 1
	Pole dimensions (H x D x W)		88 x 69 x 17.5 mm
	Pole weight		ca. 115 g
Combination with auxiliary elements	See table		

MCBs

S 200 MT series B characteristic

S 200 MT series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems;

Standards: IEC/EN 60947-2 Icu = 15 kA

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

S 201 MT

S 201 MT-NA

S 202 MT

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
1	1	9122023	S201MT-B1	2CDS271445R0015	0.112	10
	2	9128742	S201MT-B2	2CDS271445R0025	0.112	10
	3	9128773	S201MT-B3	2CDS271445R0035	0.112	10
	4	9128803	S201MT-B4	2CDS271445R0045	0.112	10
	5	9128834	S201MT-B5	2CDS271445R0055	0.112	10
	6	9128865	S201MT-B6	2CDS271445R0065	0.112	10
	8	9128896	S201MT-B8	2CDS271445R0085	0.112	10
	10	9128933	S201MT-B10	2CDS271445R0105	0.112	10
	13	9128971	S201MT-B13	2CDS271445R0135	0.115	10
	15	9129008	S201MT-B15	2CDS271445R0155	0.115	10
	16	9129053	S201MT-B16	2CDS271445R0165	0.115	10
	20	9129107	S201MT-B20	2CDS271445R0205	0.115	10
	25	9129152	S201MT-B25	2CDS271445R0255	0.115	10
	30	9129220	S201MT-B30	2CDS271445R0305	0.120	10
	32	9129275	S201MT-B32	2CDS271445R0325	0.120	10
	35	9129329	S201MT-B35	2CDS271445R0355	0.120	10
	40	9129398	S201MT-B40	2CDS271445R0405	0.120	10
	50	9129541	S201MT-B50	2CDS271445R0505	0.120	10
	60	9129718	S201MT-B60	2CDS271445R0605	0.120	10
	63	9129763	S201MT-B63	2CDS271445R0635	0.120	10
1+N	1	9129831	S201MT-B1NA	2CDS271446R0015	0.217	5
	2	9129862	S201MT-B2NA	2CDS271446R0025	0.217	5
	3	9129893	S201MT-B3NA	2CDS271446R0035	0.217	5
	4	9129923	S201MT-B4NA	2CDS271446R0045	0.217	5
	5	9129954	S201MT-B5NA	2CDS271446R0055	0.217	5
	6	9129985	S201MT-B6NA	2CDS271446R0065	0.217	5
	8	9130011	S201MT-B8NA	2CDS271446R0085	0.217	5
	10	9130059	S201MT-B10NA	2CDS271446R0105	0.217	5
	13	9130097	S201MT-B13NA	2CDS271446R0135	0.220	5
	15	9130127	S201MT-B15NA	2CDS271446R0155	0.220	5
	16	9130172	S201MT-B16NA	2CDS271446R0165	0.220	5
	20	9130219	S201MT-B20NA	2CDS271446R0205	0.220	5
	25	9130264	S201MT-B25NA	2CDS271446R0255	0.225	5
	30	9130332	S201MT-B30NA	2CDS271446R0305	0.230	5
	32	9130387	S201MT-B32NA	2CDS271446R0325	0.230	5
	35	9130431	S201MT-B35NA	2CDS271446R0355	0.230	5
	40	9130509	S201MT-B40NA	2CDS271446R0405	0.230	5
	50	9130653	S201MT-B50NA	2CDS271446R0505	0.230	5
	60	9130820	S201MT-B60NA	2CDS271446R0605	0.230	5
	63	9130875	S201MT-B63NA	2CDS271446R0635	0.230	5
2	1	9130943	S202MT-B1	2CDS272445R0015	0.224	5
	2	9130974	S202MT-B2	2CDS272445R0025	0.224	5
	3	9131001	S202MT-B3	2CDS272445R0035	0.224	5
	4	9131032	S202MT-B4	2CDS272445R0045	0.224	5
	5	9131063	S202MT-B5	2CDS272445R0055	0.224	5
	6	9131094	S202MT-B6	2CDS272445R0065	0.224	5
	8	9131124	S202MT-B8	2CDS272445R0085	0.224	5
	10	9131162	S202MT-B10	2CDS272445R0105	0.224	5
	13	9131209	S202MT-B13	2CDS272445R0135	0.230	5
	15	9131230	S202MT-B15	2CDS272445R0155	0.230	5
	16	9131285	S202MT-B16	2CDS272445R0165	0.230	5
	20	9131339	S202MT-B20	2CDS272445R0205	0.230	5
	25	9131384	S202MT-B25	2CDS272445R0255	0.230	5
	30	9131452	S202MT-B30	2CDS272445R0305	0.240	5
	32	9131506	S202MT-B32	2CDS272445R0325	0.240	5
	35	9131551	S202MT-B35	2CDS272445R0355	0.240	5
	40	9131629	S202MT-B40	2CDS272445R0405	0.240	5
	50	9131773	S202MT-B50	2CDS272445R0505	0.240	5
	60	9131940	S202MT-B60	2CDS272445R0605	0.240	5
	63	9131995	S202MT-B63	2CDS272445R0635	0.240	5

MCBs

S 200 MT series B characteristic

S 203 MT

S 203 MT-NA



S 204 MT

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
3	1	9132060	S203MT-B1	2CDS273445R0015	0.336	1
	2	9132091	S203MT-B2	2CDS273445R0025	0.336	1
	3	9132121	S203MT-B3	2CDS273445R0035	0.336	1
	4	9132152	S203MT-B4	2CDS273445R0045	0.336	1
	5	9132183	S203MT-B5	2CDS273445R0055	0.336	1
	6	9132213	S203MT-B6	2CDS273445R0065	0.336	1
	8	9132244	S203MT-B8	2CDS273445R0085	0.336	1
	10	9132282	S203MT-B10	2CDS273445R0105	0.336	1
	13	9132329	S203MT-B13	2CDS273445R0135	0.345	1
	15	9132350	S203MT-B15	2CDS273445R0155	0.345	1
	16	9132404	S203MT-B16	2CDS273445R0165	0.345	1
	20	9132442	S203MT-B20	2CDS273445R0205	0.345	1
	25	9132497	S203MT-B25	2CDS273445R0255	0.345	1
	30	9132565	S203MT-B30	2CDS273445R0305	0.360	1
	32	9132619	S203MT-B32	2CDS273445R0325	0.360	1
	35	9132664	S203MT-B35	2CDS273445R0355	0.360	1
	40	9132732	S203MT-B40	2CDS273445R0405	0.360	1
	50	9132886	S203MT-B50	2CDS273445R0505	0.360	1
	60	9133050	S203MT-B60	2CDS273445R0605	0.360	1
	63	9133104	S203MT-B63	2CDS273445R0635	0.360	1
3+N	1	9133173	S203MT-B1NA	2CDS273446R0015	0.441	1
	2	9133203	S203MT-B2NA	2CDS273446R0025	0.441	1
	3	9133234	S203MT-B3NA	2CDS273446R0035	0.441	1
	4	9133265	S203MT-B4NA	2CDS273446R0045	0.441	1
	5	9133296	S203MT-B5NA	2CDS273446R0055	0.441	1
	6	9133326	S203MT-B6NA	2CDS273446R0065	0.441	1
	8	9133357	S203MT-B8NA	2CDS273446R0085	0.441	1
	10	9133395	S203MT-B10NA	2CDS273446R0105	0.441	1
	13	9133432	S203MT-B13NA	2CDS273446R0135	0.450	1
	15	9133463	S203MT-B15NA	2CDS273446R0155	0.450	1
	16	9133517	S203MT-B16NA	2CDS273446R0165	0.450	1
	20	9133555	S203MT-B20NA	2CDS273446R0205	0.450	1
	25	9133609	S203MT-B25NA	2CDS273446R0255	0.455	1
	30	9133678	S203MT-B30NA	2CDS273446R0305	0.470	1
	32	9133722	S203MT-B32NA	2CDS273446R0325	0.470	1
	35	9133777	S203MT-B35NA	2CDS273446R0355	0.470	1
	40	9133845	S203MT-B40NA	2CDS273446R0405	0.470	1
	50	9133999	S203MT-B50NA	2CDS273446R0505	0.470	1
	60	9134163	S203MT-B60NA	2CDS273446R0605	0.470	1
	63	9134217	S203MT-B63NA	2CDS273446R0635	0.470	1
4	1	9134286	S204MT-B1	2CDS274445R0015	0.448	1
	2	9134316	S204MT-B2	2CDS274445R0025	0.448	1
	3	9134347	S204MT-B3	2CDS274445R0035	0.448	1
	4	9134378	S204MT-B4	2CDS274445R0045	0.448	1
	5	9134408	S204MT-B5	2CDS274445R0055	0.448	1
	6	9134439	S204MT-B6	2CDS274445R0065	0.448	1
	8	9134460	S204MT-B8	2CDS274445R0085	0.448	1
	10	9134507	S204MT-B10	2CDS274445R0105	0.448	1
	13	9134545	S204MT-B13	2CDS274445R0135	0.460	1
	15	9134576	S204MT-B15	2CDS274445R0155	0.460	1
	16	9134620	S204MT-B16	2CDS274445R0165	0.460	1
	20	9134668	S204MT-B20	2CDS274445R0205	0.460	1
	25	9134712	S204MT-B25	2CDS274445R0255	0.460	1
	30	9134781	S204MT-B30	2CDS274445R0305	0.480	1
	32	9134835	S204MT-B32	2CDS274445R0325	0.480	1
	35	9134880	S204MT-B35	2CDS274445R0355	0.480	1
	40	9134958	S204MT-B40	2CDS274445R0405	0.480	1
	50	9135108	S204MT-B50	2CDS274445R0505	0.480	1
	60	9135276	S204MT-B60	2CDS274445R0605	0.480	1
	63	9135320	S204MT-B63	2CDS274445R0635	0.480	1

MCBs

S 200 MT series C characteristic

S 201 MT

S 201 MT-NA

S 202 MT

S 200 MT series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems;

Standards: IEC/EN 60947-2 Icu = 15 kA

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
1	0.5	9129800	S201MT-C0.5	2CDS271445R0984	0.112	10
	1	9128711	S201MT-C1	2CDS271445R0014	0.112	10
	1.6	9129787	S201MT-C1.6	2CDS271445R0974	0.112	10
	2	9128735	S201MT-C2	2CDS271445R0024	0.112	10
	3	9128766	S201MT-C3	2CDS271445R0034	0.112	10
	4	9128797	S201MT-C4	2CDS271445R0044	0.112	10
	5	9128827	S201MT-C5	2CDS271445R0054	0.112	10
	6	9128858	S201MT-C6	2CDS271445R0064	0.112	10
	8	9128889	S201MT-C8	2CDS271445R0084	0.112	10
	10	9128926	S201MT-C10	2CDS271445R0104	0.112	10
	13	9128964	S201MT-C13	2CDS271445R0134	0.115	10
	15	9128995	S201MT-C15	2CDS271445R0154	0.115	10
	16	9129046	S201MT-C16	2CDS271445R0164	0.115	10
	20	9129091	S201MT-C20	2CDS271445R0204	0.115	10
	25	9129145	S201MT-C25	2CDS271445R0254	0.115	10
	30	9129213	S201MT-C30	2CDS271445R0304	0.120	10
	32	9129268	S201MT-C32	2CDS271445R0324	0.120	10
	35	9129312	S201MT-C35	2CDS271445R0354	0.120	10
	40	9129381	S201MT-C40	2CDS271445R0404	0.120	10
	50	9129534	S201MT-C50	2CDS271445R0504	0.120	10
	60	9129701	S201MT-C60	2CDS271445R0604	0.120	10
	63	9129756	S201MT-C63	2CDS271445R0634	0.120	10
1+N	0.5	9130912	S201MT-C0.5NA	2CDS271446R0984	0.217	5
	1	9129824	S201MT-C1NA	2CDS271446R0014	0.217	5
	1.6	9130899	S201MT-C1.6NA	2CDS271446R0974	0.217	5
	2	9129855	S201MT-C2NA	2CDS271446R0024	0.217	5
	3	9129886	S201MT-C3NA	2CDS271446R0034	0.217	5
	4	9129916	S201MT-C4NA	2CDS271446R0044	0.217	5
	5	9129947	S201MT-C5NA	2CDS271446R0054	0.217	5
	6	9129978	S201MT-C6NA	2CDS271446R0064	0.217	5
	8	9130004	S201MT-C8NA	2CDS271446R0084	0.217	5
	10	9130042	S201MT-C10NA	2CDS271446R0104	0.217	5
	13	9130080	S201MT-C13NA	2CDS271446R0134	0.220	5
	15	9130110	S201MT-C15NA	2CDS271446R0154	0.220	5
	16	9130165	S201MT-C16NA	2CDS271446R0164	0.220	5
	20	9130202	S201MT-C20NA	2CDS271446R0204	0.220	5
	25	9130257	S201MT-C25NA	2CDS271446R0254	0.225	5
	30	9130325	S201MT-C30NA	2CDS271446R0304	0.230	5
	32	9130370	S201MT-C32NA	2CDS271446R0324	0.230	5
	35	9130424	S201MT-C35NA	2CDS271446R0354	0.230	5
	40	9130493	S201MT-C40NA	2CDS271446R0404	0.230	5
	50	9130646	S201MT-C50NA	2CDS271446R0504	0.230	5
	60	9130813	S201MT-C60NA	2CDS271446R0604	0.230	5
	63	9130868	S201MT-C63NA	2CDS271446R0634	0.230	5
2	0.5	9132039	S202MT-C0.5	2CDS272445R0984	0.224	5
	1	9130936	S202MT-C1	2CDS272445R0014	0.224	5
	1.6	9132015	S202MT-C1.6	2CDS272445R0974	0.224	5
	2	9130967	S202MT-C2	2CDS272445R0024	0.224	5
	3	9130998	S202MT-C3	2CDS272445R0034	0.224	5
	4	9131025	S202MT-C4	2CDS272445R0044	0.224	5
	5	9131056	S202MT-C5	2CDS272445R0054	0.224	5
	6	9131087	S202MT-C6	2CDS272445R0064	0.224	5
	8	9131117	S202MT-C8	2CDS272445R0084	0.224	5
	10	9131155	S202MT-C10	2CDS272445R0104	0.224	5
	13	9131193	S202MT-C13	2CDS272445R0134	0.230	5
	15	9131223	S202MT-C15	2CDS272445R0154	0.230	5
	16	9131278	S202MT-C16	2CDS272445R0164	0.230	5
	20	9131322	S202MT-C20	2CDS272445R0204	0.230	5
	25	9131377	S202MT-C25	2CDS272445R0254	0.230	5
	30	9131445	S202MT-C30	2CDS272445R0304	0.240	5
	32	9131490	S202MT-C32	2CDS272445R0324	0.240	5
	35	9131544	S202MT-C35	2CDS272445R0354	0.240	5
	40	9131612	S202MT-C40	2CDS272445R0404	0.240	5
	50	9131766	S202MT-C50	2CDS272445R0504	0.240	5
	60	9131933	S202MT-C60	2CDS272445R0604	0.240	5
	63	9131988	S202MT-C63	2CDS272445R0634	0.240	5

MCBs

S 200 MT series C characteristic

S 203 MT

S 203 MT-NA

S 204 MT

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
3	0.5	9133142	S203MT-C0.5	2CDS273445R0984	0.336	1
	1	9132053	S203MT-C1	2CDS273445R0014	0.336	1
	1.6	9133128	S203MT-C1.6	2CDS273445R0974	0.336	1
	2	9132084	S203MT-C2	2CDS273445R0024	0.336	1
	3	9132114	S203MT-C3	2CDS273445R0034	0.336	1
	4	9132145	S203MT-C4	2CDS273445R0044	0.336	1
	5	9132176	S203MT-C5	2CDS273445R0054	0.336	1
	6	9132206	S203MT-C6	2CDS273445R0064	0.336	1
	8	9132237	S203MT-C8	2CDS273445R0084	0.336	1
	10	9132275	S203MT-C10	2CDS273445R0104	0.336	1
	13	9132312	S203MT-C13	2CDS273445R0134	0.345	1
	15	9132343	S203MT-C15	2CDS273445R0154	0.345	1
	16	9132398	S203MT-C16	2CDS273445R0164	0.345	1
	20	9132435	S203MT-C20	2CDS273445R0204	0.345	1
	25	9132480	S203MT-C25	2CDS273445R0254	0.345	1
	30	9132558	S203MT-C30	2CDS273445R0304	0.360	1
	32	9132602	S203MT-C32	2CDS273445R0324	0.360	1
	35	9132657	S203MT-C35	2CDS273445R0354	0.360	1
	40	9132725	S203MT-C40	2CDS273445R0404	0.360	1
	50	9132879	S203MT-C50	2CDS273445R0504	0.360	1
	60	9133043	S203MT-C60	2CDS273445R0604	0.360	1
	63	9133098	S203MT-C63	2CDS273445R0634	0.360	1
3+N	0.5	9134255	S203MT-C0.5NA	2CDS273446R0984	0.441	1
	1	9133166	S203MT-C1NA	2CDS273446R0014	0.441	1
	1.6	9134231	S203MT-C1.6NA	2CDS273446R0974	0.441	1
	2	9133197	S203MT-C2NA	2CDS273446R0024	0.441	1
	3	9133227	S203MT-C3NA	2CDS273446R0034	0.441	1
	4	9133258	S203MT-C4NA	2CDS273446R0044	0.441	1
	5	9133289	S203MT-C5NA	2CDS273446R0054	0.441	1
	6	9133319	S203MT-C6NA	2CDS273446R0064	0.441	1
	8	9133340	S203MT-C8NA	2CDS273446R0084	0.441	1
	10	9133388	S203MT-C10NA	2CDS273446R0104	0.441	1
	13	9133425	S203MT-C13NA	2CDS273446R0134	0.450	1
	15	9133456	S203MT-C15NA	2CDS273446R0154	0.450	1
	16	9133500	S203MT-C16NA	2CDS273446R0164	0.450	1
	20	9133548	S203MT-C20NA	2CDS273446R0204	0.450	1
	25	9133593	S203MT-C25NA	2CDS273446R0254	0.455	1
	30	9133661	S203MT-C30NA	2CDS273446R0304	0.470	1
	32	9133715	S203MT-C32NA	2CDS273446R0324	0.470	1
	35	9133760	S203MT-C35NA	2CDS273446R0354	0.470	1
	40	9133838	S203MT-C40NA	2CDS273446R0404	0.470	1
	50	9133982	S203MT-C50NA	2CDS273446R0504	0.470	1
	60	9134156	S203MT-C60NA	2CDS273446R0604	0.470	1
	63	9134200	S203MT-C63NA	2CDS273446R0634	0.470	1
4	0.5	9135368	S204MT-C0.5	2CDS274445R0984	0.448	1
	1	9134279	S204MT-C1	2CDS274445R0014	0.448	1
	1.6	9135344	S204MT-C1.6	2CDS274445R0974	0.448	1
	2	9134309	S204MT-C2	2CDS274445R0024	0.448	1
	3	9134330	S204MT-C3	2CDS274445R0034	0.448	1
	4	9134361	S204MT-C4	2CDS274445R0044	0.448	1
	5	9134392	S204MT-C5	2CDS274445R0054	0.448	1
	6	9134422	S204MT-C6	2CDS274445R0064	0.448	1
	8	9134453	S204MT-C8	2CDS274445R0084	0.448	1
	10	9134491	S204MT-C10	2CDS274445R0104	0.448	1
	13	9134538	S204MT-C13	2CDS274445R0134	0.460	1
	15	9134569	S204MT-C15	2CDS274445R0154	0.460	1
	16	9134613	S204MT-C16	2CDS274445R0164	0.460	1
	20	9134651	S204MT-C20	2CDS274445R0204	0.460	1
	25	9134705	S204MT-C25	2CDS274445R0254	0.460	1
	30	9134774	S204MT-C30	2CDS274445R0304	0.480	1
	32	9134828	S204MT-C32	2CDS274445R0324	0.480	1
	35	9134873	S204MT-C35	2CDS274445R0354	0.480	1
	40	9134941	S204MT-C40	2CDS274445R0404	0.480	1
	50	9135092	S204MT-C50	2CDS274445R0504	0.480	1
	60	9135269	S204MT-C60	2CDS274445R0604	0.480	1
	63	9135313	S204MT-C63	2CDS274445R0634	0.480	1

MCBs

S 200 MT series D characteristic

S 200 MT series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems;

Standards: IEC/EN 60947-2 Icu = 15 kA

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

S 201 MT

S 201 MT-NA

S 202 MT

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
1	0.5	9129794	S201MT-D0.5	2CDS271445R0981	0.112	10
	1	9128704	S201MT-D1	2CDS271445R0011	0.112	10
	1.6	9129770	S201MT-D1.6	2CDS271445R0971	0.112	10
	2	9128728	S201MT-D2	2CDS271445R0021	0.112	10
	3	9128759	S201MT-D3	2CDS271445R0031	0.112	10
	4	9128780	S201MT-D4	2CDS271445R0041	0.112	10
	5	9128810	S201MT-D5	2CDS271445R0051	0.112	10
	6	9128841	S201MT-D6	2CDS271445R0061	0.112	10
	8	9128872	S201MT-D8	2CDS271445R0081	0.112	10
	10	9128919	S201MT-D10	2CDS271445R0101	0.112	10
	13	9128957	S201MT-D13	2CDS271445R0131	0.115	10
	15	9128988	S201MT-D15	2CDS271445R0151	0.115	10
	16	9129039	S201MT-D16	2CDS271445R0161	0.115	10
	20	9129084	S201MT-D20	2CDS271445R0201	0.115	10
	25	9129138	S201MT-D25	2CDS271445R0251	0.115	10
	30	9129206	S201MT-D30	2CDS271445R0301	0.120	10
	32	9129251	S201MT-D32	2CDS271445R0321	0.120	10
	35	9129305	S201MT-D35	2CDS271445R0351	0.120	10
	40	9129374	S201MT-D40	2CDS271445R0401	0.120	10
	50	9129527	S201MT-D50	2CDS271445R0501	0.120	10
	60	9129695	S201MT-D60	2CDS271445R0601	0.120	10
	63	9129749	S201MT-D63	2CDS271445R0631	0.120	10
1+N	0.5	9130905	S201MT-D0.5NA	2CDS271446R0981	0.217	5
	1	9129817	S201MT-D1NA	2CDS271446R0011	0.217	5
	1.6	9130882	S201MT-D1.6NA	2CDS271446R0971	0.217	5
	2	9129848	S201MT-D2NA	2CDS271446R0021	0.217	5
	3	9129879	S201MT-D3NA	2CDS271446R0031	0.217	5
	4	9129909	S201MT-D4NA	2CDS271446R0041	0.217	5
	5	9129930	S201MT-D5NA	2CDS271446R0051	0.217	5
	6	9129961	S201MT-D6NA	2CDS271446R0061	0.217	5
	8	9129992	S201MT-D8NA	2CDS271446R0081	0.217	5
	10	9130035	S201MT-D10NA	2CDS271446R0101	0.217	5
	13	9130073	S201MT-D13NA	2CDS271446R0131	0.220	5
	15	9130103	S201MT-D15NA	2CDS271446R0151	0.220	5
	16	9130158	S201MT-D16NA	2CDS271446R0161	0.220	5
	20	9130196	S201MT-D20NA	2CDS271446R0201	0.220	5
	25	9130240	S201MT-D25NA	2CDS271446R0251	0.225	5
	30	9130318	S201MT-D30NA	2CDS271446R0301	0.230	5
	32	9130363	S201MT-D32NA	2CDS271446R0321	0.230	5
	35	9130417	S201MT-D35NA	2CDS271446R0351	0.230	5
	40	9130486	S201MT-D40NA	2CDS271446R0401	0.230	5
	50	9130639	S201MT-D50NA	2CDS271446R0501	0.230	5
	60	9130806	S201MT-D60NA	2CDS271446R0601	0.230	5
	63	9130851	S201MT-D63NA	2CDS271446R0631	0.230	5
2	0.5	9132022	S202MT-D0.5	2CDS272445R0981	0.224	5
	1	9130929	S202MT-D1	2CDS272445R0011	0.224	5
	1.6	9132008	S202MT-D1.6	2CDS272445R0971	0.224	5
	2	9130950	S202MT-D2	2CDS272445R0021	0.224	5
	3	9130981	S202MT-D3	2CDS272445R0031	0.224	5
	4	9131018	S202MT-D4	2CDS272445R0041	0.224	5
	5	9131049	S202MT-D5	2CDS272445R0051	0.224	5
	6	9131070	S202MT-D6	2CDS272445R0061	0.224	5
	8	9131100	S202MT-D8	2CDS272445R0081	0.224	5
	10	9131148	S202MT-D10	2CDS272445R0101	0.224	5
	13	9131186	S202MT-D13	2CDS272445R0131	0.230	5
	15	9131216	S202MT-D15	2CDS272445R0151	0.230	5
	16	9131261	S202MT-D16	2CDS272445R0161	0.230	5
	20	9131315	S202MT-D20	2CDS272445R0201	0.230	5
	25	9131360	S202MT-D25	2CDS272445R0251	0.230	5
	30	9131438	S202MT-D30	2CDS272445R0301	0.240	5
	32	9131483	S202MT-D32	2CDS272445R0321	0.240	5
	35	9131537	S202MT-D35	2CDS272445R0351	0.240	5
	40	9131605	S202MT-D40	2CDS272445R0401	0.240	5
	50	9131759	S202MT-D50	2CDS272445R0501	0.240	5
	60	9131926	S202MT-D60	2CDS272445R0601	0.240	5
	63	9131971	S202MT-D63	2CDS272445R0631	0.240	5

MCBs

S 200 MT series D characteristic

S 203 MT

S 203 MT-NA



S 204 MT

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
3	0.5	9133135	S203MT-D0.5	2CDS273445R0981	0.336	1
	1	9132046	S203MT-D1	2CDS273445R0011	0.336	1
	1.6	9133111	S203MT-D1.6	2CDS273445R0971	0.336	1
	2	9132077	S203MT-D2	2CDS273445R0021	0.336	1
	3	9132107	S203MT-D3	2CDS273445R0031	0.336	1
	4	9132138	S203MT-D4	2CDS273445R0041	0.336	1
	5	9132169	S203MT-D5	2CDS273445R0051	0.336	1
	6	9132190	S203MT-D6	2CDS273445R0061	0.336	1
	8	9132220	S203MT-D8	2CDS273445R0081	0.336	1
	10	9132268	S203MT-D10	2CDS273445R0101	0.336	1
	13	9132305	S203MT-D13	2CDS273445R0131	0.345	1
	15	9132336	S203MT-D15	2CDS273445R0151	0.345	1
	16	9132381	S203MT-D16	2CDS273445R0161	0.345	1
	20	9132428	S203MT-D20	2CDS273445R0201	0.345	1
	25	9132473	S203MT-D25	2CDS273445R0251	0.345	1
	30	9132541	S203MT-D30	2CDS273445R0301	0.360	1
	32	9132596	S203MT-D32	2CDS273445R0321	0.360	1
	35	9132640	S203MT-D35	2CDS273445R0351	0.360	1
	40	9132718	S203MT-D40	2CDS273445R0401	0.360	1
	50	9132862	S203MT-D50	2CDS273445R0501	0.360	1
	60	9133036	S203MT-D60	2CDS273445R0601	0.360	1
	63	9133081	S203MT-D63	2CDS273445R0631	0.360	1
3+N	0.5	9134248	S203MT-D0.5NA	2CDS273446R0981	0.441	1
	1	9133159	S203MT-D1NA	2CDS273446R0011	0.441	1
	1.6	9134224	S203MT-D1.6NA	2CDS273446R0971	0.441	1
	2	9133180	S203MT-D2NA	2CDS273446R0021	0.441	1
	3	9133210	S203MT-D3NA	2CDS273446R0031	0.441	1
	4	9133241	S203MT-D4NA	2CDS273446R0041	0.441	1
	5	9133272	S203MT-D5NA	2CDS273446R0051	0.441	1
	6	9133302	S203MT-D6NA	2CDS273446R0061	0.441	1
	8	9133333	S203MT-D8NA	2CDS273446R0081	0.441	1
	10	9133371	S203MT-D10NA	2CDS273446R0101	0.441	1
	13	9133418	S203MT-D13NA	2CDS273446R0131	0.450	1
	15	9133449	S203MT-D15NA	2CDS273446R0151	0.450	1
	16	9133494	S203MT-D16NA	2CDS273446R0161	0.450	1
	20	9133531	S203MT-D20NA	2CDS273446R0201	0.450	1
	25	9133586	S203MT-D25NA	2CDS273446R0251	0.455	1
	30	9133654	S203MT-D30NA	2CDS273446R0301	0.470	1
	32	9133708	S203MT-D32NA	2CDS273446R0321	0.470	1
	35	9133753	S203MT-D35NA	2CDS273446R0351	0.470	1
	40	9133821	S203MT-D40NA	2CDS273446R0401	0.470	1
	50	9133975	S203MT-D50NA	2CDS273446R0501	0.470	1
	60	9134149	S203MT-D60NA	2CDS273446R0601	0.470	1
	63	9134194	S203MT-D63NA	2CDS273446R0631	0.470	1
4	0.5	9135351	S204MT-D0.5	2CDS274445R0981	0.448	1
	1	9134262	S204MT-D1	2CDS274445R0011	0.448	1
	1.6	9135337	S204MT-D1.6	2CDS274445R0971	0.448	1
	2	9134293	S204MT-D2	2CDS274445R0021	0.448	1
	3	9134323	S204MT-D3	2CDS274445R0031	0.448	1
	4	9134354	S204MT-D4	2CDS274445R0041	0.448	1
	5	9134385	S204MT-D5	2CDS274445R0051	0.448	1
	6	9134415	S204MT-D6	2CDS274445R0061	0.448	1
	8	9134446	S204MT-D8	2CDS274445R0081	0.448	1
	10	9134484	S204MT-D10	2CDS274445R0101	0.448	1
	13	9134521	S204MT-D13	2CDS274445R0131	0.460	1
	15	9134552	S204MT-D15	2CDS274445R0151	0.460	1
	16	9134606	S204MT-D16	2CDS274445R0161	0.460	1
	20	9134644	S204MT-D20	2CDS274445R0201	0.460	1
	25	9134699	S204MT-D25	2CDS274445R0251	0.460	1
	30	9134767	S204MT-D30	2CDS274445R0301	0.480	1
	32	9134811	S204MT-D32	2CDS274445R0321	0.480	1
	35	9134866	S204MT-D35	2CDS274445R0351	0.480	1
	40	9134934	S204MT-D40	2CDS274445R0401	0.480	1
	50	9135085	S204MT-D50	2CDS274445R0501	0.480	1
	60	9135252	S204MT-D60	2CDS274445R0601	0.480	1
	63	9135306	S204MT-D63	2CDS274445R0631	0.480	1

MCBs

S 200 MT series K characteristic

S 200 MT series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems;

Standards: IEC/EN 60947-2

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

S 201 MT

S 201 MT-NA

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
1	0.2	9128902	S201MT-K0.2	2CDS271445R0087	0.112	10
	0.3	9128940	S201MT-K0.3	2CDS271445R0117	0.112	10
	0.5	9129015	S201MT-K0.5	2CDS271445R0157	0.112	10
	0.75	9129077	S201MT-K0.75	2CDS271445R0187	0.112	10
	1	9129114	S201MT-K1	2CDS271445R0217	0.112	10
	1.6	9129169	S201MT-K1.6	2CDS271445R0257	0.112	10
	2	9129183	S201MT-K2	2CDS271445R0277	0.112	10
	3	9129237	S201MT-K3	2CDS271445R0317	0.112	10
	4	9129282	S201MT-K4	2CDS271445R0337	0.112	10
	5	9129336	S201MT-K5	2CDS271445R0357	0.112	10
	6	9129350	S201MT-K6	2CDS271445R0377	0.112	10
	8	9129404	S201MT-K8	2CDS271445R0407	0.112	10
	10	9129428	S201MT-K10	2CDS271445R0427	0.112	10
	13	9129442	S201MT-K13	2CDS271445R0447	0.115	10
	15	9129466	S201MT-K15	2CDS271445R0457	0.115	10
	16	9129480	S201MT-K16	2CDS271445R0467	0.115	10
	20	9129503	S201MT-K20	2CDS271445R0487	0.115	10
	25	9129558	S201MT-K25	2CDS271445R0517	0.115	10
	30	9129572	S201MT-K30	2CDS271445R0527	0.120	10
	32	9129596	S201MT-K32	2CDS271445R0537	0.120	10
	35	9129619	S201MT-K35	2CDS271445R0547	0.120	10
	40	9129633	S201MT-K40	2CDS271445R0557	0.120	10
	50	9129657	S201MT-K50	2CDS271445R0577	0.120	10
	60	9129671	S201MT-K60	2CDS271445R0587	0.120	10
	63	9129725	S201MT-K63	2CDS271445R0607	0.120	10
1+N	0.2	9130028	S201MT-K0.2NA	2CDS271446R0087	0.217	5
	0.3	9130066	S201MT-K0.3NA	2CDS271446R0117	0.217	5
	0.5	9130134	S201MT-K0.5NA	2CDS271446R0157	0.217	5
	0.75	9130189	S201MT-K0.75NA	2CDS271446R0187	0.217	5
	1	9130226	S201MT-K1NA	2CDS271446R0217	0.217	5
	1.6	9130271	S201MT-K1.6NA	2CDS271446R0257	0.217	5
	2	9130295	S201MT-K2NA	2CDS271446R0277	0.217	5
	3	9130349	S201MT-K3NA	2CDS271446R0317	0.217	5
	4	9130394	S201MT-K4NA	2CDS271446R0337	0.217	5
	5	9130448	S201MT-K5NA	2CDS271446R0357	0.217	5
	6	9130462	S201MT-K6NA	2CDS271446R0377	0.217	5
	8	9130516	S201MT-K8NA	2CDS271446R0407	0.217	5
	10	9130530	S201MT-K10NA	2CDS271446R0427	0.217	5
	13	9130554	S201MT-K13NA	2CDS271446R0447	0.220	5
	15	9130578	S201MT-K15NA	2CDS271446R0457	0.220	5
	16	9130592	S201MT-K16NA	2CDS271446R0467	0.220	5
	20	9130615	S201MT-K20NA	2CDS271446R0487	0.220	5
	25	9130660	S201MT-K25NA	2CDS271446R0517	0.225	5
	30	9130684	S201MT-K30NA	2CDS271446R0527	0.230	5
	32	9130707	S201MT-K32NA	2CDS271446R0537	0.230	5
	35	9130721	S201MT-K35NA	2CDS271446R0547	0.230	5
	40	9130745	S201MT-K40NA	2CDS271446R0557	0.230	5
	50	9130769	S201MT-K50NA	2CDS271446R0577	0.230	5
	60	9130783	S201MT-K60NA	2CDS271446R0587	0.230	5
	63	9130837	S201MT-K63NA	2CDS271446R0607	0.230	5

MCBs

S 200 MT series K characteristic

S 202 MT

S 203 MT

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
2	0.2	9131131	S202MT-K0.2	2CDS272445R0087	0.224	5
	0.3	9131179	S202MT-K0.3	2CDS272445R0117	0.224	5
	0.5	9131247	S202MT-K0.5	2CDS272445R0157	0.224	5
	0.75	9131292	S202MT-K0.75	2CDS272445R0187	0.224	5
	1	9131346	S202MT-K1	2CDS272445R0217	0.224	5
	1.6	9131391	S202MT-K1.6	2CDS272445R0257	0.224	5
	2	9131414	S202MT-K2	2CDS272445R0277	0.224	5
	3	9131469	S202MT-K3	2CDS272445R0317	0.224	5
	4	9131513	S202MT-K4	2CDS272445R0337	0.224	5
	5	9131568	S202MT-K5	2CDS272445R0357	0.224	5
	6	9131582	S202MT-K6	2CDS272445R0377	0.224	5
	8	9131636	S202MT-K8	2CDS272445R0407	0.224	5
	10	9131650	S202MT-K10	2CDS272445R0427	0.224	5
	13	9131674	S202MT-K13	2CDS272445R0447	0.230	5
	15	9131698	S202MT-K15	2CDS272445R0457	0.230	5
	16	9131711	S202MT-K16	2CDS272445R0467	0.230	5
	20	9131735	S202MT-K20	2CDS272445R0487	0.230	5
	25	9131780	S202MT-K25	2CDS272445R0517	0.230	5
	30	9131803	S202MT-K30	2CDS272445R0527	0.240	5
	32	9131827	S202MT-K32	2CDS272445R0537	0.240	5
	35	9131841	S202MT-K35	2CDS272445R0547	0.240	5
	40	9131865	S202MT-K40	2CDS272445R0557	0.240	5
	50	9131889	S202MT-K50	2CDS272445R0577	0.240	5
	60	9131902	S202MT-K60	2CDS272445R0587	0.240	5
	63	9131957	S202MT-K63	2CDS272445R0607	0.240	5
3	0.2	9132251	S203MT-K0.2	2CDS273445R0087	0.336	1
	0.3	9132299	S203MT-K0.3	2CDS273445R0117	0.336	1
	0.5	9132367	S203MT-K0.5	2CDS273445R0157	0.336	1
	0.75	9132411	S203MT-K0.75	2CDS273445R0187	0.336	1
	1	9132459	S203MT-K1	2CDS273445R0217	0.336	1
	1.6	9132503	S203MT-K1.6	2CDS273445R0257	0.336	1
	2	9132527	S203MT-K2	2CDS273445R0277	0.336	1
	3	9132572	S203MT-K3	2CDS273445R0317	0.336	1
	4	9132626	S203MT-K4	2CDS273445R0337	0.336	1
	5	9132671	S203MT-K5	2CDS273445R0357	0.336	1
	6	9132695	S203MT-K6	2CDS273445R0377	0.336	1
	8	9132749	S203MT-K8	2CDS273445R0407	0.336	1
	10	9132763	S203MT-K10	2CDS273445R0427	0.336	1
	13	9132787	S203MT-K13	2CDS273445R0447	0.345	1
	15	9132800	S203MT-K15	2CDS273445R0457	0.345	1
	16	9132824	S203MT-K16	2CDS273445R0467	0.345	1
	20	9132848	S203MT-K20	2CDS273445R0487	0.345	1
	25	9132893	S203MT-K25	2CDS273445R0517	0.345	1
	30	9132916	S203MT-K30	2CDS273445R0527	0.360	1
	32	9132930	S203MT-K32	2CDS273445R0537	0.360	1
	35	9132954	S203MT-K35	2CDS273445R0547	0.360	1
	40	9132978	S203MT-K40	2CDS273445R0557	0.360	1
	50	9132992	S203MT-K50	2CDS273445R0577	0.360	1
	60	9133012	S203MT-K60	2CDS273445R0587	0.360	1
	63	9133067	S203MT-K63	2CDS273445R0607	0.360	1

MCBs

S 200 MT series K characteristic

S 203 MT-NA

S 204 MT

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
3+N	0.2	9133364	S203MT-K0.2NA	2CDS273446R0087	0.441	1
	0.3	9133401	S203MT-K0.3NA	2CDS273446R0117	0.441	1
	0.5	9133470	S203MT-K0.5NA	2CDS273446R0157	0.441	1
	0.75	9133524	S203MT-K0.75NA	2CDS273446R0187	0.441	1
	1	9133562	S203MT-K1NA	2CDS273446R0217	0.441	1
	1.6	9133616	S203MT-K1.6NA	2CDS273446R0257	0.441	1
	2	9133630	S203MT-K2NA	2CDS273446R0277	0.441	1
	3	9133685	S203MT-K3NA	2CDS273446R0317	0.441	1
	4	9133739	S203MT-K4NA	2CDS273446R0337	0.441	1
	5	9133784	S203MT-K5NA	2CDS273446R0357	0.441	1
	6	9133807	S203MT-K6NA	2CDS273446R0377	0.441	1
	8	9133852	S203MT-K8NA	2CDS273446R0407	0.441	1
	10	9133876	S203MT-K10NA	2CDS273446R0427	0.441	1
	13	9133890	S203MT-K13NA	2CDS273446R0447	0.450	1
	15	9133913	S203MT-K15NA	2CDS273446R0457	0.450	1
	16	9133937	S203MT-K16NA	2CDS273446R0467	0.450	1
	20	9133951	S203MT-K20NA	2CDS273446R0487	0.450	1
	25	9134002	S203MT-K25NA	2CDS273446R0517	0.455	1
	30	9134026	S203MT-K30NA	2CDS273446R0527	0.470	1
	32	9134040	S203MT-K32NA	2CDS273446R0537	0.470	1
	35	9134064	S203MT-K35NA	2CDS273446R0547	0.470	1
	40	9134088	S203MT-K40NA	2CDS273446R0557	0.470	1
	50	9134101	S203MT-K50NA	2CDS273446R0577	0.470	1
	60	9134125	S203MT-K60NA	2CDS273446R0587	0.470	1
	63	9134170	S203MT-K63NA	2CDS273446R0607	0.470	1
4	0.2	9134477	S204MT-K0.2	2CDS274445R0087	0.448	1
	0.3	9134514	S204MT-K0.3	2CDS274445R0117	0.448	1
	0.5	9134583	S204MT-K0.5	2CDS274445R0157	0.448	1
	0.75	9134637	S204MT-K0.75	2CDS274445R0187	0.448	1
	1	9134675	S204MT-K1	2CDS274445R0217	0.448	1
	1.6	9134729	S204MT-K1.6	2CDS274445R0257	0.448	1
	2	9134743	S204MT-K2	2CDS274445R0277	0.448	1
	3	9134798	S204MT-K3	2CDS274445R0317	0.448	1
	4	9134842	S204MT-K4	2CDS274445R0337	0.448	1
	5	9134897	S204MT-K5	2CDS274445R0357	0.448	1
	6	9134910	S204MT-K6	2CDS274445R0377	0.448	1
	8	9134965	S204MT-K8	2CDS274445R0407	0.448	1
	10	9134989	S204MT-K10	2CDS274445R0427	0.448	1
	13	9135009	S204MT-K13	2CDS274445R0447	0.460	1
	15	9135023	S204MT-K15	2CDS274445R0457	0.460	1
	16	9135047	S204MT-K16	2CDS274445R0467	0.460	1
	20	9135061	S204MT-K20	2CDS274445R0487	0.460	1
	25	9135115	S204MT-K25	2CDS274445R0517	0.460	1
	30	9135139	S204MT-K30	2CDS274445R0527	0.480	1
	32	9135153	S204MT-K32	2CDS274445R0537	0.480	1
	35	9135177	S204MT-K35	2CDS274445R0547	0.480	1
	40	9135191	S204MT-K40	2CDS274445R0557	0.480	1
	50	9135214	S204MT-K50	2CDS274445R0577	0.480	1
	60	9135238	S204MT-K60	2CDS274445R0587	0.480	1
	63	9135283	S204MT-K63	2CDS274445R0607	0.480	1

MCBs

S 200 MT series Z characteristic

S 200 MT series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems;

Standards: IEC/EN 60947-2 Icu = 15 kA

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

S 201 MT

S 201 MT-NA

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
1	0.5	9129022	S201MT-Z0.5	2CDS271445R0158	0.112	10
	1	9129121	S201MT-Z1	2CDS271445R0218	0.112	10
	1.6	9129176	S201MT-Z1.6	2CDS271445R0258	0.112	10
	2	9129190	S201MT-Z2	2CDS271445R0278	0.112	10
	3	9129244	S201MT-Z3	2CDS271445R0318	0.112	10
	4	9129299	S201MT-Z4	2CDS271445R0338	0.112	10
	5	9129343	S201MT-Z5	2CDS271445R0358	0.112	10
	6	9129367	S201MT-Z6	2CDS271445R0378	0.112	10
	8	9129411	S201MT-Z8	2CDS271445R0408	0.112	10
	10	9129435	S201MT-Z10	2CDS271445R0428	0.112	10
	13	9129459	S201MT-Z13	2CDS271445R0448	0.115	10
	15	9129473	S201MT-Z15	2CDS271445R0458	0.115	10
	16	9129497	S201MT-Z16	2CDS271445R0468	0.115	10
	20	9129510	S201MT-Z20	2CDS271445R0488	0.115	10
	25	9129565	S201MT-Z25	2CDS271445R0518	0.115	10
	30	9129589	S201MT-Z30	2CDS271445R0528	0.120	10
	32	9129602	S201MT-Z32	2CDS271445R0538	0.120	10
	35	9129626	S201MT-Z35	2CDS271445R0548	0.120	10
	40	9129640	S201MT-Z40	2CDS271445R0558	0.120	10
	50	9129664	S201MT-Z50	2CDS271445R0578	0.120	10
	60	9129688	S201MT-Z60	2CDS271445R0588	0.120	10
	63	9129732	S201MT-Z63	2CDS271445R0608	0.120	10
1+N	0.5	9130141	S201MT-Z0.5NA	2CDS271446R0158	0.217	5
	1	9130233	S201MT-Z1NA	2CDS271446R0218	0.217	5
	1.6	9130288	S201MT-Z1.6NA	2CDS271446R0258	0.217	5
	2	9130301	S201MT-Z2NA	2CDS271446R0278	0.217	5
	3	9130356	S201MT-Z3NA	2CDS271446R0318	0.217	5
	4	9130400	S201MT-Z4NA	2CDS271446R0338	0.217	5
	5	9130455	S201MT-Z5NA	2CDS271446R0358	0.217	5
	6	9130479	S201MT-Z6NA	2CDS271446R0378	0.217	5
	8	9130523	S201MT-Z8NA	2CDS271446R0408	0.217	5
	10	9130547	S201MT-Z10NA	2CDS271446R0428	0.217	5
	13	9130561	S201MT-Z13NA	2CDS271446R0448	0.220	5
	15	9130585	S201MT-Z15NA	2CDS271446R0458	0.220	5
	16	9130608	S201MT-Z16NA	2CDS271446R0468	0.220	5
	20	9130622	S201MT-Z20NA	2CDS271446R0488	0.220	5
	25	9130677	S201MT-Z25NA	2CDS271446R0518	0.225	5
	30	9130691	S201MT-Z30NA	2CDS271446R0528	0.230	5
	32	9130714	S201MT-Z32NA	2CDS271446R0538	0.230	5
	35	9130738	S201MT-Z35NA	2CDS271446R0548	0.230	5
	40	9130752	S201MT-Z40NA	2CDS271446R0558	0.230	5
	50	9130776	S201MT-Z50NA	2CDS271446R0578	0.230	5
	60	9130790	S201MT-Z60NA	2CDS271446R0588	0.230	5
	63	9130844	S201MT-Z63NA	2CDS271446R0608	0.230	5

MCBs

S 200 MT series Z characteristic

S 202 MT

S 203 MT

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
2	0.5	9131254	S202MT-Z0.5	2CDS272445R0158	0.224	5
	1	9131353	S202MT-Z1	2CDS272445R0218	0.224	5
	1.6	9131407	S202MT-Z1.6	2CDS272445R0258	0.224	5
	2	9131421	S202MT-Z2	2CDS272445R0278	0.224	5
	3	9131476	S202MT-Z3	2CDS272445R0318	0.224	5
	4	9131520	S202MT-Z4	2CDS272445R0338	0.224	5
	5	9131575	S202MT-Z5	2CDS272445R0358	0.224	5
	6	9131599	S202MT-Z6	2CDS272445R0378	0.224	5
	8	9131643	S202MT-Z8	2CDS272445R0408	0.224	5
	10	9131667	S202MT-Z10	2CDS272445R0428	0.224	5
	13	9131681	S202MT-Z13	2CDS272445R0448	0.230	5
	15	9131704	S202MT-Z15	2CDS272445R0458	0.230	5
	16	9131728	S202MT-Z16	2CDS272445R0468	0.230	5
	20	9131742	S202MT-Z20	2CDS272445R0488	0.230	5
	25	9131797	S202MT-Z25	2CDS272445R0518	0.230	5
	30	9131810	S202MT-Z30	2CDS272445R0528	0.240	5
	32	9131834	S202MT-Z32	2CDS272445R0538	0.240	5
	35	9131858	S202MT-Z35	2CDS272445R0548	0.240	5
	40	9131872	S202MT-Z40	2CDS272445R0558	0.240	5
	50	9131896	S202MT-Z50	2CDS272445R0578	0.240	5
	60	9131919	S202MT-Z60	2CDS272445R0588	0.240	5
	63	9131964	S202MT-Z63	2CDS272445R0608	0.240	5
3	0.5	9132374	S203MT-Z0.5	2CDS273445R0158	0.336	1
	1	9132466	S203MT-Z1	2CDS273445R0218	0.336	1
	1.6	9132510	S203MT-Z1.6	2CDS273445R0258	0.336	1
	2	9132534	S203MT-Z2	2CDS273445R0278	0.336	1
	3	9132589	S203MT-Z3	2CDS273445R0318	0.336	1
	4	9132633	S203MT-Z4	2CDS273445R0338	0.336	1
	5	9132688	S203MT-Z5	2CDS273445R0358	0.336	1
	6	9132701	S203MT-Z6	2CDS273445R0378	0.336	1
	8	9132756	S203MT-Z8	2CDS273445R0408	0.336	1
	10	9132770	S203MT-Z10	2CDS273445R0428	0.336	1
	13	9132794	S203MT-Z13	2CDS273445R0448	0.345	1
	15	9132817	S203MT-Z15	2CDS273445R0458	0.345	1
	16	9132831	S203MT-Z16	2CDS273445R0468	0.345	1
	20	9132855	S203MT-Z20	2CDS273445R0488	0.345	1
	25	9132909	S203MT-Z25	2CDS273445R0518	0.345	1
	30	9132923	S203MT-Z30	2CDS273445R0528	0.360	1
	32	9132947	S203MT-Z32	2CDS273445R0538	0.360	1
	35	9132961	S203MT-Z35	2CDS273445R0548	0.360	1
	40	9132985	S203MT-Z40	2CDS273445R0558	0.360	1
	50	9133005	S203MT-Z50	2CDS273445R0578	0.360	1
	60	9133029	S203MT-Z60	2CDS273445R0588	0.360	1
	63	9133074	S203MT-Z63	2CDS273445R0608	0.360	1

MCBs

S 200 MT series Z characteristic

S 203 MT-NA

S 204 MT

Number of poles	Rated current [A]	Bbn 401677 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
3+N	0.5	9133487	S203MT-Z0.5NA	2CDS273446R0158	0.441	1
	1	9133579	S203MT-Z1NA	2CDS273446R0218	0.441	1
	1.6	9133623	S203MT-Z1.6NA	2CDS273446R0258	0.441	1
	2	9133647	S203MT-Z2NA	2CDS273446R0278	0.441	1
	3	9133692	S203MT-Z3NA	2CDS273446R0318	0.441	1
	4	9133746	S203MT-Z4NA	2CDS273446R0338	0.441	1
	5	9133791	S203MT-Z5NA	2CDS273446R0358	0.441	1
	6	9133814	S203MT-Z6NA	2CDS273446R0378	0.441	1
	8	9133869	S203MT-Z8NA	2CDS273446R0408	0.441	1
	10	9133883	S203MT-Z10NA	2CDS273446R0428	0.441	1
	13	9133906	S203MT-Z13NA	2CDS273446R0448	0.450	1
	15	9133920	S203MT-Z15NA	2CDS273446R0458	0.450	1
	16	9133944	S203MT-Z16NA	2CDS273446R0468	0.450	1
	20	9133968	S203MT-Z20NA	2CDS273446R0488	0.450	1
	25	9134019	S203MT-Z25NA	2CDS273446R0518	0.455	1
	30	9134033	S203MT-Z30NA	2CDS273446R0528	0.470	1
	32	9134057	S203MT-Z32NA	2CDS273446R0538	0.470	1
	35	9134071	S203MT-Z35NA	2CDS273446R0548	0.470	1
	40	9134095	S203MT-Z40NA	2CDS273446R0558	0.470	1
	50	9134118	S203MT-Z50NA	2CDS273446R0578	0.470	1
	60	9134132	S203MT-Z60NA	2CDS273446R0588	0.470	1
	63	9134187	S203MT-Z63NA	2CDS273446R0608	0.470	1
4	0.5	9134590	S204MT-Z0.5	2CDS274445R0158	0.448	1
	1	9134682	S204MT-Z1	2CDS274445R0218	0.448	1
	1.6	9134736	S204MT-Z1.6	2CDS274445R0258	0.448	1
	2	9134750	S204MT-Z2	2CDS274445R0278	0.448	1
	3	9134804	S204MT-Z3	2CDS274445R0318	0.448	1
	4	9134859	S204MT-Z4	2CDS274445R0338	0.448	1
	5	9134903	S204MT-Z5	2CDS274445R0358	0.448	1
	6	9134927	S204MT-Z6	2CDS274445R0378	0.448	1
	8	9134972	S204MT-Z8	2CDS274445R0408	0.448	1
	10	9134996	S204MT-Z10	2CDS274445R0428	0.448	1
	13	9135016	S204MT-Z13	2CDS274445R0448	0.460	1
	15	9135030	S204MT-Z15	2CDS274445R0458	0.460	1
	16	9135054	S204MT-Z16	2CDS274445R0468	0.460	1
	20	9135078	S204MT-Z20	2CDS274445R0488	0.460	1
	25	9135122	S204MT-Z25	2CDS274445R0518	0.460	1
	30	9135146	S204MT-Z30	2CDS274445R0528	0.480	1
	32	9135160	S204MT-Z32	2CDS274445R0538	0.480	1
	35	9135184	S204MT-Z35	2CDS274445R0548	0.480	1
	40	9135207	S204MT-Z40	2CDS274445R0558	0.480	1
	50	9135221	S204MT-Z50	2CDS274445R0578	0.480	1
	60	9135245	S204MT-Z60	2CDS274445R0588	0.480	1
	63	9135290	S204MT-Z63	2CDS274445R0608	0.480	1

MCBs

S 200 MT UC series technical features

S 201 MT UC

			S 200 MT UC
Standards	Product Standard		IEC/EN 60947-2
	Hazard level acc. to EN 45545-2		R26/HL3
	Resistance to shocks and vibrations acc. to IEC 61373		Category 1 - Class A/B - Body mounted
General data	Poles		1P, 2P, 3P, 4P
	Tripping characteristics		B, C, K, Z
	Rated current In	A	0.2 - 63 A
	Rated frequency f	Hz	0/50/60 Hz
	Rated insulation voltage Ui acc. to IEC/EN 60664-1	V	253 V AC (phase to ground), 440 V AC (phase to phase)
	Overvoltage category		III
	Pollution degree		3
Data acc. to IEC/EN 60947-2	Rated operational voltage Ue	V	1P: 253 V AC, 220 V DC
			2...4P: 440 V AC, 440 V DC
	Max. power frequency recovery voltage (Umax)	V	1P: 266 V AC, 250 V DC
			2...4P: 462 V AC, 500 V DC
	Min. operating voltage	V	12 V AC – 12 V DC
	Rated ultimate short-circuit breaking capacity Icu	kA	≤40 A: 10 kA (AC); 10 kA (DC)
			>40 A: 6 kA (AC); 10 kA (DC)
	Rated service short-circuit breaking capacity Ics	kA	≤40 A: 7.5 kA (AC); 10 kA (DC)
			>40 A: 6 kA (AC); 10 kA (DC)
	Rated impulse withstand voltage Uimp. (1.2/50µs)	kV	4 kV (test voltage 6.2 kV at sea level; 5 kV at 2,000 m)
	Dielectric test voltage	kV	2 kV (50/60 Hz, 1 min)
	Reference temperature for tripping characteristics	°C	B, C: 55 °C; K, Z: 20 °C
	Electrical endurance	ops.	In < 32 A: 20,000 ops. (AC), In ≥ 32 A: 10,000 ops. (AC); 1,500 ops. (DC)

MCBs

S 200 MT UC series technical features

S 201 MT UC

				S 200 MT UC
Mechanical data	Housing			Insulation group I, RAL 7035
	Toggle			Insulation group II, black, sealable
	Contact position indicator			Real CPI (green OFF / red ON)
	Protection degree acc. to EN 60529			IP20, IP40 in enclosure with cover
	Mechanical endurance		ops.	20,000 ops.
	Shock resistance acc. to IEC/EN 60068-2-27			25 g - 2 shocks - 13 ms
	Vibration resistance acc. to IEC/EN 60068-2-6			5 g - 20 cycles at 5 ... 150 ... 5 Hz at 0.8 In
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55 °C/90-96 % and 25 °C/95-100 %
	Ambient temperature (with daily average ≤ +35 °C)		°C	-40...+70°C
	Storage temperature		°C	-40 ... +70 °C
Installation	Terminal type			Failsafe bi-directional cylinder-lift terminal
	Cross-section of conductors (top/bottom)	solid/ stranded	mm^2	35 mm^2 / 35 mm^2
		flexible	mm^2	25 mm^2 / 25 mm^2
			AWG	14 – 4 AWG (Cu only)
	Cross-section of busbars		mm^2	10 mm^2 / 10 mm^2
			AWG	14 – 8 AWG
	Tightening torque	IEC	Nm	2.8 Nm
		UL	in-lbs.	18 in-lbs.
	Screwdriver			No. 2 Pozidriv
	Mounting			on DIN-Rail 35 mm, acc. to EN 60715 by fast clip
	Mounting position			any
	Supply			Please note polarity of device
Dimensions and weight	Mounting dimensions acc. to DIN 43880			1
	Pole dimensions (H x D x W)		mm	85 x 69 x 17.5 mm
	Pole weight		g	approx. 125 g
Combination with auxiliary elements	See table			

MCBs

S 200 MT UC series B characteristic
Universal current range

S 200 MT UC series B characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables in TN and IT systems; version dedicated to application in direct current circuits for voltages up to 220 V DC 1 pole and 440 V DC 2, 3 and 4 poles.
Standards: IEC/EN 60947-2 Icu=10 kA
Hazard level R26/HL3 according to EN 45545
Category 1 - Class A/B (Body mounted) according to IEC 61373
(for DC applications, please note polarity of device)

S 201 MT UC

S 202 MT UC

S 203 MT UC

S 204 MT UC

Number of poles	Rated current	Bbn 401361	Order details		Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code	kg	pc.
1	6	4464911	S201MT-B6UC	2CDS271065R0065	0.117	10
	10	4464928	S201MT-B10UC	2CDS271065R0105	0.117	10
	13	4464935	S201MT-B13UC	2CDS271065R0135	0.120	10
	16	4464942	S201MT-B16UC	2CDS271065R0165	0.120	10
	20	4464959	S201MT-B20UC	2CDS271065R0205	0.120	10
	25	4464966	S201MT-B25UC	2CDS271065R0255	0.120	10
	32	4464973	S201MT-B32UC	2CDS271065R0325	0.125	10
	40	4464980	S201MT-B40UC	2CDS271065R0405	0.125	10
	50	4464997	S201MT-B50UC	2CDS271065R0505	0.125	10
	63	4465000	S201MT-B63UC	2CDS271065R0635	0.125	10
2	6	4465215	S202MT-B6UC	2CDS272065R0065	0.234	5
	10	4465222	S202MT-B10UC	2CDS272065R0105	0.234	5
	13	4465239	S202MT-B13UC	2CDS272065R0135	0.240	5
	16	4465246	S202MT-B16UC	2CDS272065R0165	0.240	5
	20	4465253	S202MT-B20UC	2CDS272065R0205	0.240	5
	25	4465260	S202MT-B25UC	2CDS272065R0255	0.240	5
	32	4465277	S202MT-B32UC	2CDS272065R0325	0.250	5
	40	4465284	S202MT-B40UC	2CDS272065R0405	0.250	5
	50	4465291	S202MT-B50UC	2CDS272065R0505	0.250	5
	63	4465307	S202MT-B63UC	2CDS272065R0635	0.250	5
3	6	4465512	S203MT-B6UC	2CDS273065R0065	0.351	1
	10	4465529	S203MT-B10UC	2CDS273065R0105	0.351	1
	13	4465536	S203MT-B13UC	2CDS273065R0135	0.360	1
	16	4465543	S203MT-B16UC	2CDS273065R0165	0.360	1
	20	4465550	S203MT-B20UC	2CDS273065R0205	0.360	1
	25	4465567	S203MT-B25UC	2CDS273065R0255	0.360	1
	32	4465574	S203MT-B32UC	2CDS273065R0325	0.375	1
	40	4465581	S203MT-B40UC	2CDS273065R0405	0.375	1
	50	4465598	S203MT-B50UC	2CDS273065R0505	0.375	1
	63	4465604	S203MT-B63UC	2CDS273065R0635	0.375	1
4	6	4465819	S204MT-B6UC	2CDS274065R0065	0.468	1
	10	4465826	S204MT-B10UC	2CDS274065R0105	0.468	1
	13	4465833	S204MT-B13UC	2CDS274065R0135	0.480	1
	16	4465840	S204MT-B16UC	2CDS274065R0165	0.480	1
	20	4465857	S204MT-B20UC	2CDS274065R0205	0.480	1
	25	4465864	S204MT-B25UC	2CDS274065R0255	0.480	1
	32	4465871	S204MT-B32UC	2CDS274065R0325	0.500	1
	40	4465888	S204MT-B40UC	2CDS274065R0405	0.500	1
	50	4465895	S204MT-B50UC	2CDS274065R0505	0.500	1
	63	4465901	S204MT-B63UC	2CDS274065R0635	0.500	1

MCBs

S 200 MT UC series C characteristic
Universal current range

S 200 MT UC series C characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables in TN and IT systems; version dedicated to application in direct current circuits for voltages up to 220 V DC 1 pole and 440 V DC 2, 3 and 4 poles.
Standards: IEC/EN 60947-2 Icu=10 kA
Hazard level R26/HL3 according to EN 45545
Category 1 - Class A/B (Body mounted) according to IEC 61373
(for DC applications, please note polarity of device)

S 201 MT UC

Number of poles	Rated current	Bbn 401361	Order details		Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code	kg	pc.
1	0.5	4448843	S201MT-C0,5UC	2CDS271065R0984	0.117	10
	1	4448218	S201MT-C1UC	2CDS271065R0014	0.117	10
	1.6	4448836	S201MT-C1,6UC	2CDS271065R0974	0.117	10
	2	4448225	S201MT-C2UC	2CDS271065R0024	0.117	10
	3	4448232	S201MT-C3UC	2CDS271065R0034	0.117	10
	4	4448249	S201MT-C4UC	2CDS271065R0044	0.117	10
	6	4448256	S201MT-C6UC	2CDS271065R0064	0.117	10
	8	4448263	S201MT-C8UC	2CDS271065R0084	0.117	10
	10	4448287	S201MT-C10UC	2CDS271065R0104	0.117	10
	13	4448300	S201MT-C13UC	2CDS271065R0134	0.120	10
	16	4448331	S201MT-C16UC	2CDS271065R0164	0.120	10
	20	4448355	S201MT-C20UC	2CDS271065R0204	0.120	10
	25	4448386	S201MT-C25UC	2CDS271065R0254	0.120	10
	32	4448454	S201MT-C32UC	2CDS271065R0324	0.125	10
	40	4448522	S201MT-C40UC	2CDS271065R0404	0.125	10
	50	4448652	S201MT-C50UC	2CDS271065R0504	0.125	10
	63	4448829	S201MT-C63UC	2CDS271065R0634	0.125	10

S 202 MT UC

Number of poles	Rated current	Bbn 401361	Order details		Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code	kg	pc.
2	0.5	4449451	S202MT-C0,5UC	2CDS272065R0984	0.234	5
	1	4448850	S202MT-C1UC	2CDS272065R0014	0.234	5
	1.6	4449444	S202MT-C1,6UC	2CDS272065R0974	0.234	5
	2	4448867	S202MT-C2UC	2CDS272065R0024	0.234	5
	3	4448874	S202MT-C3UC	2CDS272065R0034	0.234	5
	4	4448881	S202MT-C4UC	2CDS272065R0044	0.234	5
	6	4448898	S202MT-C6UC	2CDS272065R0064	0.234	5
	8	4448904	S202MT-C8UC	2CDS272065R0084	0.234	5
	10	4448928	S202MT-C10UC	2CDS272065R0104	0.234	5
	13	4448942	S202MT-C13UC	2CDS272065R0134	0.240	5
	16	4448973	S202MT-C16UC	2CDS272065R0164	0.240	5
	20	4448997	S202MT-C20UC	2CDS272065R0204	0.240	5
	25	4449024	S202MT-C25UC	2CDS272065R0254	0.240	5
	32	4449093	S202MT-C32UC	2CDS272065R0324	0.250	5
	40	4449161	S202MT-C40UC	2CDS272065R0404	0.250	5
	50	4449291	S202MT-C50UC	2CDS272065R0504	0.250	5
	63	4449437	S202MT-C63UC	2CDS272065R0634	0.250	5

MCBs

S 200 MT UC series C characteristic
Universal current range

S 203 MT UC

Number of poles	Rated current	Bbn 401361	Order details		Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code	kg	pc.
3	0.5	4448201	S203MT-C0,5UC	2CDS273065R0984	0.351	1
	1	4447600	S203MT-C1UC	2CDS273065R0014	0.351	1
	1.6	4448195	S203MT-C1,6UC	2CDS273065R0974	0.351	1
	2	4447617	S203MT-C2UC	2CDS273065R0024	0.351	1
	3	4447624	S203MT-C3UC	2CDS273065R0034	0.351	1
	4	4447631	S203MT-C4UC	2CDS273065R0044	0.351	1
	6	4447648	S203MT-C6UC	2CDS273065R0064	0.351	1
	8	4447655	S203MT-C8UC	2CDS273065R0084	0.351	1
	10	4447679	S203MT-C10UC	2CDS273065R0104	0.351	1
	13	4447693	S203MT-C13UC	2CDS273065R0134	0.360	1
	16	4447723	S203MT-C16UC	2CDS273065R0164	0.360	1
	20	4447747	S203MT-C20UC	2CDS273065R0204	0.360	1
	25	4447778	S203MT-C25UC	2CDS273065R0254	0.360	1
	32	4447846	S203MT-C32UC	2CDS273065R0324	0.375	1
	40	4447914	S203MT-C40UC	2CDS273065R0404	0.375	1
	50	4448041	S203MT-C50UC	2CDS273065R0504	0.375	1
	63	4448188	S203MT-C63UC	2CDS273065R0634	0.375	1

S 204 MT UC

Number of poles	Rated current	Bbn 401361	Order details		Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code	kg	pc.
4	0.5	4447563	S204MT-C0,5UC	2CDS274065R0984	0.468	1
	1	4446948	S204MT-C1UC	2CDS274065R0014	0.468	1
	1.6	4447556	S204MT-C1,6UC	2CDS274065R0974	0.468	1
	2	4446955	S204MT-C2UC	2CDS274065R0024	0.468	1
	3	4446962	S204MT-C3UC	2CDS274065R0034	0.468	1
	4	4446979	S204MT-C4UC	2CDS274065R0044	0.468	1
	6	4446986	S204MT-C6UC	2CDS274065R0064	0.468	1
	8	4446993	S204MT-C8UC	2CDS274065R0084	0.468	1
	10	4447013	S204MT-C10UC	2CDS274065R0104	0.468	1
	13	4447037	S204MT-C13UC	2CDS274065R0134	0.480	1
	16	4447068	S204MT-C16UC	2CDS274065R0164	0.480	1
	20	4447082	S204MT-C20UC	2CDS274065R0204	0.480	1
	25	4447112	S204MT-C25UC	2CDS274065R0254	0.480	1
	32	4447181	S204MT-C32UC	2CDS274065R0324	0.500	1
	40	4447259	S204MT-C40UC	2CDS274065R0404	0.500	1
	50	4447389	S204MT-C50UC	2CDS274065R0504	0.500	1
	63	4447549	S204MT-C63UC	2CDS274065R0634	0.500	1

MCBs

S 200 MT UC series K characteristic
Universal current range

S 200 MT UC series K characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables in TN and IT systems; version dedicated to application in direct current circuits for voltages up to 220 V DC 1 pole and 440 V DC 2, 3 and 4 poles.
Standards: IEC/EN 60947-2 Icu=10 kA
Hazard level R26/HL3 according to EN 45545
Category 1 - Class A/B (Body mounted) according to IEC 61373
(for DC applications, please note polarity of device)

S 201 MT UC

Number of poles	Rated current	Bbn 401361	Order details		Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code	kg	pc.
1	0.2	4448270	S201MT-K0,2UC	2CDS271065R0087	0.117	10
	0.3	4448294	S201MT-K0,3UC	2CDS271065R0117	0.117	10
	0.5	4448317	S201MT-K0,5UC	2CDS271065R0157	0.117	10
	0.75	4448348	S201MT-K0,75UC	2CDS271065R0187	0.117	10
	1	4448362	S201MT-K1UC	2CDS271065R0217	0.117	10
	1.6	4448393	S201MT-K1,6UC	2CDS271065R0257	0.117	10
	2	4448416	S201MT-K2UC	2CDS271065R0277	0.117	10
	3	4448430	S201MT-K3UC	2CDS271065R0317	0.117	10
	4	4448461	S201MT-K4UC	2CDS271065R0337	0.117	10
	5	4448485	S201MT-K5UC	2CDS271065R0357	0.117	10
	6	4448508	S201MT-K6UC	2CDS271065R0377	0.117	10
	8	4448539	S201MT-K8UC	2CDS271065R0407	0.117	10
	10	4448553	S201MT-K10UC	2CDS271065R0427	0.117	10
	13	4448577	S201MT-K13UC	2CDS271065R0447	0.120	10
	15	4448591	S201MT-K15UC	2CDS271065R0457	0.120	10
	16	4448614	S201MT-K16UC	2CDS271065R0467	0.120	10
	20	4448638	S201MT-K20UC	2CDS271065R0487	0.120	10
	25	4448669	S201MT-K25UC	2CDS271065R0517	0.120	10
	30	4448683	S201MT-K30UC	2CDS271065R0527	0.125	10
	32	4448706	S201MT-K32UC	2CDS271065R0537	0.125	10
	35	4448720	S201MT-K35UC	2CDS271065R0547	0.125	10
	40	4448744	S201MT-K40UC	2CDS271065R0557	0.125	10
	50	4448768	S201MT-K50UC	2CDS271065R0577	0.125	10
	60	4448782	S201MT-K60UC	2CDS271065R0587	0.125	10
	63	4448805	S201MT-K63UC	2CDS271065R0607	0.125	10

MCBs

S 200 MT UC series K characteristic
Universal current range

S 202 MT UC

S 203 MT UC

Number of poles	Rated current	Bbn 401361	Order details		Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code	kg	pc.
2	0.2	4448911	S202MT-K0,2UC	2CDS272065R0087	0.234	5
	0.3	4448935	S202MT-K0,3UC	2CDS272065R0117	0.234	5
	0.5	4448959	S202MT-K0,5UC	2CDS272065R0157	0.234	5
	0.75	4448980	S202MT-K0,75UC	2CDS272065R0187	0.234	5
	1	4449000	S202MT-K1UC	2CDS272065R0217	0.234	5
	1.6	4449031	S202MT-K1,6UC	2CDS272065R0257	0.234	5
	2	4449055	S202MT-K2UC	2CDS272065R0277	0.234	5
	3	4449079	S202MT-K3UC	2CDS272065R0317	0.234	5
	4	4449109	S202MT-K4UC	2CDS272065R0337	0.234	5
	5	4449123	S202MT-K5UC	2CDS272065R0357	0.234	5
	6	4449147	S202MT-K6UC	2CDS272065R0377	0.234	5
	8	4449178	S202MT-K8UC	2CDS272065R0407	0.234	5
	10	4449192	S202MT-K10UC	2CDS272065R0427	0.234	5
	13	4449215	S202MT-K13UC	2CDS272065R0447	0.240	5
	15	4449239	S202MT-K15UC	2CDS272065R0457	0.240	5
	16	4449253	S202MT-K16UC	2CDS272065R0467	0.240	5
	20	4449277	S202MT-K20UC	2CDS272065R0487	0.240	5
	25	4449307	S202MT-K25UC	2CDS272065R0517	0.240	5
	30	4449321	S202MT-K30UC	2CDS272065R0527	0.250	5
	32	4449345	S202MT-K32UC	2CDS272065R0537	0.250	5
	35	4449369	S202MT-K35UC	2CDS272065R0547	0.250	5
	40	4449383	S202MT-K40UC	2CDS272065R0557	0.250	5
	50	4449406	S202MT-K50UC	2CDS272065R0577	0.250	5
	60	4449420	S202MT-K60UC	2CDS272065R0587	0.250	5
	63	4447587	S202MT-K63UC	2CDS272065R0607	0.250	5
3	0.2	4447662	S203MT-K0,2UC	2CDS273065R0087	0.351	1
	0.3	4447686	S203MT-K0,3UC	2CDS273065R0117	0.351	1
	0.5	4447709	S203MT-K0,5UC	2CDS273065R0157	0.351	1
	0.75	4447730	S203MT-K0,75UC	2CDS273065R0187	0.351	1
	1	4447754	S203MT-K1UC	2CDS273065R0217	0.351	1
	1.6	4447785	S203MT-K1,6UC	2CDS273065R0257	0.351	1
	2	4447808	S203MT-K2UC	2CDS273065R0277	0.351	1
	3	4447822	S203MT-K3UC	2CDS273065R0317	0.351	1
	4	4447853	S203MT-K4UC	2CDS273065R0337	0.351	1
	5	4447877	S203MT-K5UC	2CDS273065R0357	0.351	1
	6	4447891	S203MT-K6UC	2CDS273065R0377	0.351	1
	8	4447921	S203MT-K8UC	2CDS273065R0407	0.351	1
	10	4447945	S203MT-K10UC	2CDS273065R0427	0.351	1
	13	4447969	S203MT-K13UC	2CDS273065R0447	0.360	1
	15	4447983	S203MT-K15UC	2CDS273065R0457	0.360	1
	16	4448003	S203MT-K16UC	2CDS273065R0467	0.360	1
	20	4448027	S203MT-K20UC	2CDS273065R0487	0.360	1
	25	4448058	S203MT-K25UC	2CDS273065R0517	0.360	1
	30	4448072	S203MT-K30UC	2CDS273065R0527	0.375	1
	32	4448096	S203MT-K32UC	2CDS273065R0537	0.375	1
	35	4448119	S203MT-K35UC	2CDS273065R0547	0.375	1
	40	4448133	S203MT-K40UC	2CDS273065R0557	0.375	1
	50	4448157	S203MT-K50UC	2CDS273065R0577	0.375	1
	60	4448171	S203MT-K60UC	2CDS273065R0587	0.375	1
	63	4446924	S203MT-K63UC	2CDS273065R0607	0.375	1

MCBs

S 200 MT UC series K characteristic
Universal current range

S 204 MT UC

Number of poles	Rated current	Bbn 401361	Order details		Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code	kg	pc.
4	0.2	4447006	S204MT-K0,2UC	2CDS274065R0087	0.468	1
	0.3	4447020	S204MT-K0,3UC	2CDS274065R0117	0.468	1
	0.5	4447044	S204MT-K0,5UC	2CDS274065R0157	0.468	1
	0.75	4447075	S204MT-K0,75UC	2CDS274065R0187	0.468	1
	1	4447099	S204MT-K1UC	2CDS274065R0217	0.468	1
	1.6	4447129	S204MT-K1,6UC	2CDS274065R0257	0.468	1
	2	4447143	S204MT-K2UC	2CDS274065R0277	0.468	1
	3	4447167	S204MT-K3UC	2CDS274065R0317	0.468	1
	4	4447198	S204MT-K4UC	2CDS274065R0337	0.468	1
	5	4447211	S204MT-K5UC	2CDS274065R0357	0.468	1
	6	4447235	S204MT-K6UC	2CDS274065R0377	0.468	1
	8	4447266	S204MT-K8UC	2CDS274065R0407	0.468	1
	10	4447280	S204MT-K10UC	2CDS274065R0427	0.468	1
	13	4447303	S204MT-K13UC	2CDS274065R0447	0.480	1
	15	4447327	S204MT-K15UC	2CDS274065R0457	0.480	1
	16	4447341	S204MT-K16UC	2CDS274065R0467	0.480	1
	20	4447365	S204MT-K20UC	2CDS274065R0487	0.480	1
	25	4447396	S204MT-K25UC	2CDS274065R0517	0.480	1
	30	4447419	S204MT-K30UC	2CDS274065R0527	0.500	1
	32	4447433	S204MT-K32UC	2CDS274065R0537	0.500	1
	35	4447457	S204MT-K35UC	2CDS274065R0547	0.500	1
	40	4447471	S204MT-K40UC	2CDS274065R0557	0.500	1
	50	4447495	S204MT-K50UC	2CDS274065R0577	0.500	1
	60	4447518	S204MT-K60UC	2CDS274065R0587	0.500	1
	63	4449468	S204MT-K63UC	2CDS274065R0607	0.500	1

MCBs

S 200 MT UC series Z characteristic
Universal current range

S 200 MT UC series Z characteristic
Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables in TN and IT systems; version dedicated to application in direct current circuits for voltages up to 220 V DC 1 pole and 440 V DC 2. 3 and 4 poles.
Standards: IEC/EN 60947-2 Icu=10 kA
Hazard level R26/HL3 according to EN 45545
Category 1 - Class A/B (Body mounted) according to IEC 61373
(for DC applications, please note polarity of device)

S 201 MT UC

S 202 MT UC

Number of poles	Rated current	Bbn 401361	Order details		Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code	kg	pc.
1	0.5	4448324	S201MT-Z0,5UC	2CDS271065R0158	0.117	10
	1	4448379	S201MT-Z1UC	2CDS271065R0218	0.117	10
	1.6	4448409	S201MT-Z1,6UC	2CDS271065R0258	0.117	10
	2	4448423	S201MT-Z2UC	2CDS271065R0278	0.117	10
	3	4448447	S201MT-Z3UC	2CDS271065R0318	0.117	10
	4	4448478	S201MT-Z4UC	2CDS271065R0338	0.117	10
	5	4448492	S201MT-Z5UC	2CDS271065R0358	0.117	10
	6	4448515	S201MT-Z6UC	2CDS271065R0378	0.117	10
	8	4448546	S201MT-Z8UC	2CDS271065R0408	0.117	10
	10	4448560	S201MT-Z10UC	2CDS271065R0428	0.117	10
	15	4448607	S201MT-Z15UC	2CDS271065R0458	0.120	10
	16	4448621	S201MT-Z16UC	2CDS271065R0468	0.120	10
	20	4448645	S201MT-Z20UC	2CDS271065R0488	0.120	10
	25	4448676	S201MT-Z25UC	2CDS271065R0518	0.120	10
	30	4448690	S201MT-Z30UC	2CDS271065R0528	0.125	10
	32	4448713	S201MT-Z32UC	2CDS271065R0538	0.125	10
	35	4448737	S201MT-Z35UC	2CDS271065R0548	0.125	10
	40	4448751	S201MT-Z40UC	2CDS271065R0558	0.125	10
	50	4448775	S201MT-Z50UC	2CDS271065R0578	0.125	10
	60	4448799	S201MT-Z60UC	2CDS271065R0588	0.125	10
	63	4448812	S201MT-Z63UC	2CDS271065R0608	0.125	10
2	0.5	4448966	S202MT-Z0,5UC	2CDS272065R0158	0.234	5
	1	4449017	S202MT-Z1UC	2CDS272065R0218	0.234	5
	1.6	4449048	S202MT-Z1,6UC	2CDS272065R0258	0.234	5
	2	4449062	S202MT-Z2UC	2CDS272065R0278	0.234	5
	3	4449086	S202MT-Z3UC	2CDS272065R0318	0.234	5
	4	4449116	S202MT-Z4UC	2CDS272065R0338	0.234	5
	5	4449130	S202MT-Z5UC	2CDS272065R0358	0.234	5
	6	4449154	S202MT-Z6UC	2CDS272065R0378	0.234	5
	8	4449185	S202MT-Z8UC	2CDS272065R0408	0.234	5
	10	4449208	S202MT-Z10UC	2CDS272065R0428	0.234	5
	15	4449246	S202MT-Z15UC	2CDS272065R0458	0.240	5
	16	4449260	S202MT-Z16UC	2CDS272065R0468	0.240	5
	20	4449284	S202MT-Z20UC	2CDS272065R0488	0.240	5
	25	4449314	S202MT-Z25UC	2CDS272065R0518	0.240	5
	30	4449338	S202MT-Z30UC	2CDS272065R0528	0.250	5
	32	4449352	S202MT-Z32UC	2CDS272065R0538	0.250	5
	35	4449376	S202MT-Z35UC	2CDS272065R0548	0.250	5
	40	4449390	S202MT-Z40UC	2CDS272065R0558	0.250	5
	50	4449413	S202MT-Z50UC	2CDS272065R0578	0.250	5
	60	4447570	S202MT-Z60UC	2CDS272065R0588	0.250	5
	63	4447594	S202MT-Z63UC	2CDS272065R0608	0.250	5

MCBs

S 200 MT UC series Z characteristic
Universal current range

S 203 MT UC

Number of poles	Rated current	Bbn 401361	Order details		Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code	kg	pc.
3	0.5	4447716	S203MT-Z0,5UC	2CDS273065R0158	0.351	1
	1	4447761	S203MT-Z1UC	2CDS273065R0218	0.351	1
	1.6	4447792	S203MT-Z1,6UC	2CDS273065R0258	0.351	1
	2	4447815	S203MT-Z2UC	2CDS273065R0278	0.351	1
	3	4447839	S203MT-Z3UC	2CDS273065R0318	0.351	1
	4	4447860	S203MT-Z4UC	2CDS273065R0338	0.351	1
	5	4447884	S203MT-Z5UC	2CDS273065R0358	0.351	1
	6	4447907	S203MT-Z6UC	2CDS273065R0378	0.351	1
	8	4447938	S203MT-Z8UC	2CDS273065R0408	0.351	1
	10	4447952	S203MT-Z10UC	2CDS273065R0428	0.351	1
	15	4447990	S203MT-Z15UC	2CDS273065R0458	0.360	1
	16	4448010	S203MT-Z16UC	2CDS273065R0468	0.360	1
	20	4448034	S203MT-Z20UC	2CDS273065R0488	0.360	1
	25	4448065	S203MT-Z25UC	2CDS273065R0518	0.360	1
	30	4448089	S203MT-Z30UC	2CDS273065R0528	0.375	1
	32	4448102	S203MT-Z32UC	2CDS273065R0538	0.375	1
	35	4448126	S203MT-Z35UC	2CDS273065R0548	0.375	1
	40	4448140	S203MT-Z40UC	2CDS273065R0558	0.375	1
	50	4448164	S203MT-Z50UC	2CDS273065R0578	0.375	1
	60	4446917	S203MT-Z60UC	2CDS273065R0588	0.375	1
	63	4446931	S203MT-Z63UC	2CDS273065R0608	0.375	1

S 204 MT UC

Number of poles	Rated current	Bbn 401361	Order details		Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code	kg	pc.
4	0.5	4447051	S204MT-Z0,5UC	2CDS274065R0158	0.468	1
	1	4447105	S204MT-Z1UC	2CDS274065R0218	0.468	1
	1.6	4447136	S204MT-Z1,6UC	2CDS274065R0258	0.468	1
	2	4447150	S204MT-Z2UC	2CDS274065R0278	0.468	1
	3	4447174	S204MT-Z3UC	2CDS274065R0318	0.468	1
	4	4447204	S204MT-Z4UC	2CDS274065R0338	0.468	1
	5	4447228	S204MT-Z5UC	2CDS274065R0358	0.468	1
	6	4447242	S204MT-Z6UC	2CDS274065R0378	0.468	1
	8	4447273	S204MT-Z8UC	2CDS274065R0408	0.468	1
	10	4447297	S204MT-Z10UC	2CDS274065R0428	0.468	1
	15	4447334	S204MT-Z15UC	2CDS274065R0458	0.480	1
	16	4447358	S204MT-Z16UC	2CDS274065R0468	0.480	1
	20	4447372	S204MT-Z20UC	2CDS274065R0488	0.480	1
	25	4447402	S204MT-Z25UC	2CDS274065R0518	0.480	1
	30	4447426	S204MT-Z30UC	2CDS274065R0528	0.500	1
	32	4447440	S204MT-Z32UC	2CDS274065R0538	0.500	1
	35	4447464	S204MT-Z35UC	2CDS274065R0548	0.500	1
	40	4447488	S204MT-Z40UC	2CDS274065R0558	0.500	1
	50	4447501	S204MT-Z50UC	2CDS274065R0578	0.500	1
	60	4447525	S204MT-Z60UC	2CDS274065R0588	0.500	1
	63	4447532	S204MT-Z63UC	2CDS274065R0608	0.500	1

MCBs

S 202 TC technical features

S 202 TC

				S 202 TC
General data	Standards			IEC/EN 60898-1
	Number of poles			2P
	Number od modules			1
	Tripping Characteristic			B, C
	Rated current In		A	2 ≤ In ≤ 32
	Rated voltage Ue		V	240
	Insulation voltage Ui		V	500 V AC
	Overvoltage category			III
	Pollution degree			2
	Rated frequency		Hz	50/60
	Min operating voltage		V AC/DC	12
	Max operating voltage		V	253
	Rated breaking capacity acc. to IEC/EN 60898-1	Icn	A	6000
	Rated breaking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate Icu	kA	6
		service Ics	kA	6
	Rated breaking capacity Icn1 acc. to IEC/EN 60898-1	Icn_1	A	6000
	Rated breaking capacity acc. to IEC/EN 60947-2 in DC (only referring to internal short circuit test, poles connected in series, tc 4ms)	ultimate Icu	kA	6 kA @ 110 VDC
	Rated impulse withstand voltage (1.2/50) Uimp		kV	4 kV
	Dielectric test voltage at ind. freq. for 1 min.		kV	2.5 kV (50 / 60Hz, 1 min.)
	Grid distance		mm	35
	Energy limiting class			3
Mechanical features	Housing			Insulation group I, RAL 7035
	Toggle			Insulation group II, Black RAL 9005, sealable in ON-OFF positions
	Electrical life		opera-tions	7000
	Mechanical life		opera-tions	7000
	Protection degree acc. to EN 60529	housing		IP40
		terminals		IP20
	Shock resistance acc. to IEC/EN 60068-2-27			40 g (x,y,z) - 18 shocks - 5 ms half sinusoidal
	Vibration resistance acc. to IEC/EN 60068-2-6			0.35 mm or 5 g - 20 cycles at 5…150…5 Hz
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55 °C/90–96 % and 25 °C/95–100 %
	Reference temperature for setting of thermal element		°C	30
	Ambient temperature (with daily average ≤ +35 °C)		°C	-25…+55
	Storage temperature		°C	-40...+70
Installation	Terminal type	top / bottom		Fail-safe terminals, bi-directional cylinder-lift terminal (shock protected)
	Terminal size for cables	top / bottom	mm^2	10 flexible /16 rigid top & bottom
	Terminal size for busbars	top / bottom	mm^2	10/10
	Tightening torque	top / bottom	Nm	3
	Stripping length of the cable		mm	12
	Mounting			on DIN rail EN 60715 (35 mm) by means of mounting clip
	Mounting position			Vertical & Horizontal
	Supply from			Top/Bottom terminals
Dimensions and weight	Dimensions (H×D×W)		mm	86×70×17.8 mm
	Weight		g	125
Combination with auxiliary elements	Combinable with accessories and auxiliaries			YES, SCC-IH6R, SCC-IH6L

MCBs

S 202 TC characteristic

S 202 TC: 2P in 1M for traction
Function: protection and control of the circuits against overloads and short-circuits
Applications: traction
Standard: IEC/EN 60898-1
Plastic material acc. to UL94 and IEC/EN 60695-11-10: V0
Classification according to EN 45545-1:2013 and EN 45545-2:2013+A1:2015: R26/HL3, R22/HL3
Shocks and vibrations according to standard IEC/ EN 61373: Category 1, class B

N. poles	Breaking capacity	Tripping Char.	Rated Current In A	Bbn 8012542 EAN	Order details		Weight 1 piece kg	Pack unit pc.
					Type code	Order code		
2P	6kA	B	2	740353	S202TC-B2	2CSS252421R0025	0,125	6
			4	740452	S202TC-B4	2CSS252421R0045	0,125	6
			6	740551	S202TC-B6	2CSS252421R0065	0,125	6
			10	740650	S202TC-B10	2CSS252421R0105	0,125	6
			16	740759	S202TC-B16	2CSS252421R0165	0,125	6
			20	740858	S202TC-B20	2CSS252421R0205	0,125	6
			25	740957	S202TC-B25	2CSS252421R0255	0,125	6
			32	741053	S202TC-B32	2CSS252421R0325	0,125	6
		C	2	741152	S202TC-C2	2CSS252421R0024	0,125	6
			4	741251	S202TC-C4	2CSS252421R0044	0,125	6
			6	741350	S202TC-C6	2CSS252421R0064	0,125	6
			10	741459	S202TC-C10	2CSS252421R0104	0,125	6
			16	741558	S202TC-C16	2CSS252421R0164	0,125	6
			20	741657	S202TC-C20	2CSS252421R0204	0,125	6
			25	741756	S202TC-C25	2CSS252421R0254	0,125	6
			32	741855	S202TC-C32	2CSS252421R0324	0,125	6

MCBs

S 200 MTR / S 200 MTR DC series technical features

S 200 MTR

		S 200 MTR / S 200 MTR DC
General Data	Standards	IEC/EN 60947-2
	Poles	1P, 2P, 3P, 4P for AC 1P, 2P and 4P for DC
	Tripping characteristics (at 45°C)	B, C, K, Z Conventional non-intervention current: Inf = 1,13 In Conventional intervention current: If=1.45 In
	Breaking capacity Icn (according to CEI / EN 60898-1)	10000 A
	Rated current In	0,5 ≤ In ≤ 63A
	Rated frequency f	50/60 and DC (0 Hz)
	Rated insulation voltage Ui	440V
	Overvoltage category	III
	Pollution degree	3
Data acc. to IEC/EN 60947-2	Rated operational voltage Ue (tolerance +5%)	AC: 1P up to 250 V 2/3/4 P up to 440 V DC: 1P up to 250 V 2/4 P up to 440 V
	Max. power frequency recovery voltage (Umax)	1 P: 266 V AC, 2...4 P: 462 V AC 1 P: 250 V DC, 2 and 4 P: 500 V DC
	Min. operating voltage	12 VAC - 12 VDC
	Rated ultimate short-circuit breaking capacity Icu - acc. to IEC / EN 60947-2	≤25 A: 25 kA (AC); 10 kA (DC) >25 A: 15 kA (AC); 10 kA (DC)
	Rated service short-circuit breaking capacity Ics - acc. to IEC / EN 60947-2	≤25 A: 12.5 kA (AC); 10 kA (DC) >25 A: 7,5 kA (AC); 10 kA (DC)
	Rated impulse withstand voltage Uimp. (1.2/50µs)	4 kV (test voltage 6.2kV at sea level, 5kV at 2,000m)
	Dielectric test voltage	3 kV
	Calibration temperature	45°C
	Reference temperature for tripping characteristics according IEC/ EN 60947-2	40°C
	Electrical endurance (AC at Ue)	20.000 (In ≤ 32A) - 10,000 (In > 32A)

MCBs

S 200 MTR / S 200 MTR DC mechanical data

S 200 MTR

		S 200 MTR / S 200 MTR DC
Mechanical Data	Housing	Insulation Group I, RAL 7035 according EN45545-2 R22/HL3 and R26/HL 3 (V0 according UL94)
	Toggle	Insulation group II, black, sealable
	Contact position indication	Red/Green indication
	Protection degree acc. to EN 60529	IP20, IP40 in enclosure with cover
	Mechanical endurance	20.000 ops
	Shock resistance acc. to IEC/EN 60068-2-27	25 g - 2 shocks - 13 ms
	Shock resistance acc. to IEC/ EN 61373	Cat 1 / Class B
	Vibration resistance acc. to IEC/EN 60068-2-6	5g - 20 cycle at 5 ...150 ...5 Hz with load 0.8 In
	EN 50155	Electronic equipment used on rolling stock According IEC / EN 61373 plus temperature rise test
	Fire behaviour acc. To EN 45545-2	R26/HL3 - R22/HL3
	Fire behaviour acc. To UL 94	V0
	IEC / EN 60077 – 1/ 2	Yes
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	28 cycles with 55°C/90-96% and 25°C/95-100%
	Ambient temperature	-40....75°C
	Storage temperature	- 40 up to +85°C
Installation	Terminal	Ring tongue terminals
	Cross-section of conductors (top / bottom)	0.75 ....25 mm²
	Type of cable lugs	Ring tongue
	Tightening Torque	2.8 Nm
	Screwdriver	No. 2 Pozidrive
	Mounting	On Din Rail 35 mm acc. EN 60715 by fast clip
	Mounting position	Any
	Supply	AC: top or bottom / DC: Please note polarity of device
	Altitude	2.000 m height
Dimension and Weight	Mounting dimensions acc. to DIN 43880	1
	Pole dimensions (H x D x W)	85 x 69 x 17,5 mm (per pole)
	Pole weight	approx. 125 g
Combination with aux. elements	Auxiliary contact	Yes S2C Range + Ring tongue version
	Shunt trip	Yes S2C Range + Ring tongue version
	Rotary Handle	Yes
	Locking device	Yes
	Accessories EN 45545-2:2013	R26/HL3 mainly
	Accessories resistance of IEC 61373	Yes

MCBs

S 200 MTR series B characteristic

S 200 MTR series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems; special ringtongue connection, dedicated for DC application, please consider polarity dependency marked on device!

Standards: IEC/EN 60947-2 Icu = 15 kA / DC Icu = 10 kA

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

S 201 MTR

S 202 MTR

S 203 MTR



S 204 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Order details		Weight 1 piece Kg	Pack unit pc.
			Type Code	Order Code		
1	6	104180	S201MTR-B6	2CDS271447R0065	0.112	10
	10	104210	S201MTR-B10	2CDS271447R0105	0.112	10
	13	104234	S201MTR-B13	2CDS271447R0135	0.115	10
	16	104272	S201MTR-B16	2CDS271447R0165	0.115	10
	20	104296	S201MTR-B20	2CDS271447R0205	0.115	10
	25	104333	S201MTR-B25	2CDS271447R0255	0.115	10
	32	104371	S201MTR-B32	2CDS271447R0325	0.120	10
	40	104432	S201MTR-B40	2CDS271447R0405	0.120	10
	50	104548	S201MTR-B50	2CDS271447R0505	0.120	10
	63	104661	S201MTR-B63	2CDS271447R0635	0.120	10
2	6	104722	S202MTR-B6	2CDS272447R0065	0.224	5
	10	104753	S202MTR-B10	2CDS272447R0105	0.224	5
	13	104777	S202MTR-B13	2CDS272447R0135	0.230	5
	16	104814	S202MTR-B16	2CDS272447R0165	0.230	5
	20	104838	S202MTR-B20	2CDS272447R0205	0.230	5
	25	104876	S202MTR-B25	2CDS272447R0255	0.230	5
	32	104913	S202MTR-B32	2CDS272447R0325	0.240	5
	40	104975	S202MTR-B40	2CDS272447R0405	0.240	5
	50	105088	S202MTR-B50	2CDS272447R0505	0.240	5
	63	105200	S202MTR-B63	2CDS272447R0635	0.240	5
3	6	105262	S203MTR-B6	2CDS273447R0065	0.336	1
	10	105293	S203MTR-B10	2CDS273447R0105	0.336	1
	13	105316	S203MTR-B13	2CDS273447R0135	0.345	1
	16	105354	S203MTR-B16	2CDS273447R0165	0.345	1
	20	105378	S203MTR-B20	2CDS273447R0205	0.345	1
	25	105415	S203MTR-B25	2CDS273447R0255	0.345	1
	32	105453	S203MTR-B32	2CDS273447R0325	0.360	1
	40	105514	S203MTR-B40	2CDS273447R0405	0.360	1
	50	105620	S203MTR-B50	2CDS273447R0505	0.360	1
	63	105743	S203MTR-B63	2CDS273447R0635	0.360	1
4	6	105804	S204MTR-B6	2CDS274447R0065	0.448	1
	10	105835	S204MTR-B10	2CDS274447R0105	0.448	1
	13	105859	S204MTR-B13	2CDS274447R0135	0.460	1
	16	105897	S204MTR-B16	2CDS274447R0165	0.460	1
	20	105910	S204MTR-B20	2CDS274447R0205	0.460	1
	25	105958	S204MTR-B25	2CDS274447R0255	0.460	1
	32	105996	S204MTR-B32	2CDS274447R0325	0.480	1
	40	106054	S204MTR-B40	2CDS274447R0405	0.480	1
	50	106160	S204MTR-B50	2CDS274447R0505	0.480	1
	63	106283	S204MTR-B63	2CDS274447R0635	0.480	1

MCBs

S 200 MTR DC series B characteristic

S 201 MTR DC

S 202 MTR DC

S 204 MTR DC

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Order details		Weight 1 piece Kg	Pack unit pc.
			Type Code	Order Code		
1	6	100830	S201MTR-B6 DC	2CDS271565R0065	0.112	10
	10	121118	S201MTR-B10 DC	2CDS271565R0105	0.112	10
	13	136181	S201MTR-B13 DC	2CDS271565R0135	0.115	10
	16	121125	S201MTR-B16 DC	2CDS271565R0165	0.115	10
	20	136198	S201MTR-B20 DC	2CDS271565R0205	0.115	10
	25	136365	S201MTR-B25 DC	2CDS271565R0255	0.115	10
	32	136341	S201MTR-B32 DC	2CDS271565R0325	0.120	10
	40	136327	S201MTR-B40 DC	2CDS271565R0405	0.120	10
	50	136280	S201MTR-B50 DC	2CDS271565R0505	0.120	10
	63	136228	S201MTR-B63 DC	2CDS271565R0635	0.120	10
2	6	136648	S202MTR-B6 DC	2CDS272565R0065	0.224	5
	10	136631	S202MTR-B10 DC	2CDS272565R0105	0.224	5
	13	136617	S202MTR-B13 DC	2CDS272565R0135	0.230	5
	16	136891	S202MTR-B16 DC	2CDS272565R0165	0.230	5
	20	136594	S202MTR-B20 DC	2CDS272565R0205	0.230	5
	25	136587	S202MTR-B25 DC	2CDS272565R0255	0.230	5
	32	136563	S202MTR-B32 DC	2CDS272565R0325	0.240	5
	40	136549	S202MTR-B40 DC	2CDS272565R0405	0.240	5
	50	136471	S202MTR-B50 DC	2CDS272565R0505	0.240	5
	63	136914	S202MTR-B63 DC	2CDS272565R0635	0.240	5
4	6	135894	S204MTR-B6 DC	2CDS274565R0065	0.448	1
	10	135818	S204MTR-B10 DC	2CDS274565R0105	0.448	1
	13	135825	S204MTR-B13 DC	2CDS274565R0135	0.460	1
	16	135832	S204MTR-B16 DC	2CDS274565R0165	0.460	1
	20	135849	S204MTR-B20 DC	2CDS274565R0205	0.460	1
	25	135856	S204MTR-B25 DC	2CDS274565R0255	0.460	1
	32	135863	S204MTR-B32 DC	2CDS274565R0325	0.480	1
	40	135870	S204MTR-B40 DC	2CDS274565R0405	0.480	1
	50	135887	S204MTR-B50 DC	2CDS274565R0505	0.480	1
	63	135924	S204MTR-B63 DC	2CDS274565R0635	0.480	1

MCBs

S 200 MTR series C characteristic

S 200 MTR series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems; special ringtongue connection.

Standards: IEC/EN 60947-2 Icu = 15 kA / DC Icu = 10kA

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

S 201 MTR

S 202 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Order details		Weight 1 piece Kg	Pack unit pc.
			Type Code	Order Code		
1	0,5	104685	S201MTR-C0,5	2CDS271447R0984	0.112	10
	1	104135	S201MTR-C1	2CDS271447R0014	0.112	10
	1,6	104678	S201MTR-C1,6	2CDS271447R0974	0.112	10
	2	118804	S201MTR-C2	2CDS271447R0024	0.112	10
	3	118811	S201MTR-C3	2CDS271447R0034	0.112	10
	4	104166	S201MTR-C4	2CDS271447R0044	0.112	10
	6	104173	S201MTR-C6	2CDS271447R0064	0.112	10
	8	104197	S201MTR-C8	2CDS271447R0084	0.112	10
	10	136846	S201MTR-C10	2CDS271447R0104	0.112	10
	13	104227	S201MTR-C13	2CDS271447R0134	0.115	10
	16	104265	S201MTR-C16	2CDS271447R0164	0.115	10
	20	104289	S201MTR-C20	2CDS271447R0204	0.115	10
	25	104326	S201MTR-C25	2CDS271447R0254	0.115	10
	32	104364	S201MTR-C32	2CDS271447R0324	0.120	10
	40	104425	S201MTR-C40	2CDS271447R0404	0.120	10
	50	104531	S201MTR-C50	2CDS271447R0504	0.120	10
	63	104654	S201MTR-C63	2CDS271447R0634	0.120	10
2	0,5	105224	S202MTR-C0,5	2CDS272447R0984	0.224	5
	1	104692	S202MTR-C1	2CDS272447R0014	0.224	5
	1,6	105217	S202MTR-C1,6	2CDS272447R0974	0.224	5
	2	119009	S202MTR-C2	2CDS272447R0024	0.224	5
	3	119016	S202MTR-C3	2CDS272447R0034	0.224	5
	4	104708	S202MTR-C4	2CDS272447R0044	0.224	5
	6	104715	S202MTR-C6	2CDS272447R0064	0.224	5
	8	104739	S202MTR-C8	2CDS272447R0084	0.224	5
	10	104746	S202MTR-C10	2CDS272447R0104	0.224	5
	13	104760	S202MTR-C13	2CDS272447R0134	0.230	5
	16	104807	S202MTR-C16	2CDS272447R0164	0.230	5
	20	104821	S202MTR-C20	2CDS272447R0204	0.230	5
	25	104869	S202MTR-C25	2CDS272447R0254	0.230	5
	32	104906	S202MTR-C32	2CDS272447R0324	0.240	5
	40	104968	S202MTR-C40	2CDS272447R0404	0.240	5
	50	105071	S202MTR-C50	2CDS272447R0504	0.240	5
	63	105194	S202MTR-C63	2CDS272447R0634	0.240	5

MCBs

S 200 MTR series C characteristic

S 203 MTR

S 204 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Order details		Weight 1 piece Kg	Pack unit pc.
			Type Code	Order Code		
3	0,5	105767	S203MTR-C0,5	2CDS273447R0984	0.336	1
	1	105231	S203MTR-C1	2CDS273447R0014	0.336	1
	1,6	105750	S203MTR-C1,6	2CDS273447R0974	0.336	1
	2	119207	S203MTR-C2	2CDS273447R0024	0.336	1
	3	119214	S203MTR-C3	2CDS273447R0034	0.336	1
	4	105248	S203MTR-C4	2CDS273447R0044	0.336	1
	6	105255	S203MTR-C6	2CDS273447R0064	0.336	1
	8	105279	S203MTR-C8	2CDS273447R0084	0.336	1
	10	105286	S203MTR-C10	2CDS273447R0104	0.336	1
	13	137034	S203MTR-C13	2CDS273447R0134	0.345	1
	16	105347	S203MTR-C16	2CDS273447R0164	0.345	1
	20	105361	S203MTR-C20	2CDS273447R0204	0.345	1
	25	137027	S203MTR-C25	2CDS273447R0254	0.345	1
	32	105446	S203MTR-C32	2CDS273447R0324	0.360	1
	40	137010	S203MTR-C40	2CDS273447R0404	0.360	1
	50	105613	S203MTR-C50	2CDS273447R0504	0.360	1
	63	105736	S203MTR-C63	2CDS273447R0634	0.360	1
4	0,5	106306	S204MTR-C0,5	2CDS274447R0984	0.448	1
	1	105774	S204MTR-C1	2CDS274447R0014	0.448	1
	1,6	106290	S204MTR-C1,6	2CDS274447R0974	0.448	1
	2	119306	S204MTR-C2	2CDS274447R0024	0.448	1
	3	119313	S204MTR-C3	2CDS274447R0034	0.448	1
	4	105781	S204MTR-C4	2CDS274447R0044	0.448	1
	6	105798	S204MTR-C6	2CDS274447R0064	0.448	1
	8	105811	S204MTR-C8	2CDS274447R0084	0.448	1
	10	105828	S204MTR-C10	2CDS274447R0104	0.448	1
	13	105842	S204MTR-C13	2CDS274447R0134	0.460	1
	16	105880	S204MTR-C16	2CDS274447R0164	0.460	1
	20	105903	S204MTR-C20	2CDS274447R0204	0.460	1
	25	105941	S204MTR-C25	2CDS274447R0254	0.460	1
	32	105989	S204MTR-C32	2CDS274447R0324	0.480	1
	40	106047	S204MTR-C40	2CDS274447R0404	0.480	1
	50	106153	S204MTR-C50	2CDS274447R0504	0.480	1
	63	106276	S204MTR-C63	2CDS274447R0634	0.480	1

MCBs

S 200 MTR DC series C characteristic

S 200 MTR DC series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems; special ringtongue connection, dedicated for DC application, please consider polarity dependency marked on device!

Standards: IEC/EN 60947-2 Icu = 15 kA / DC Icu = 10 kA

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

S 201 MTR DC

S 202 MTR DC

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Order details		Weight 1 piece Kg	Pack unit pc.
			Type Code	Order Code		
1	0,5	136754	S201MTR-C0,5 DC	2CDS271565R0984	0.112	10
	1	121132	S201MTR-C1 DC	2CDS271565R0014	0.112	10
	1,6	136211	S201MTR-C1,6 DC	2CDS271565R0974	0.112	10
	2	118903	S201MTR-C2 DC	2CDS271565R0024	0.112	10
	3	118910	S201MTR-C3 DC	2CDS271565R0034	0.112	10
	4	121262	S201MTR-C4 DC	2CDS271565R0044	0.112	10
	6	121255	S201MTR-C6 DC	2CDS271565R0064	0.112	10
	8	121248	S201MTR-C8 DC	2CDS271565R0084	0.112	10
	10	121231	S201MTR-C10 DC	2CDS271565R0104	0.112	10
	13	136372	S201MTR-C13 DC	2CDS271565R0134	0.115	10
	16	121217	S201MTR-C16 DC	2CDS271565R0164	0.115	10
	20	136785	S201MTR-C20 DC	2CDS271565R0204	0.115	10
	25	121187	S201MTR-C25 DC	2CDS271565R0254	0.115	10
	32	121170	S201MTR-C32 DC	2CDS271565R0324	0.120	10
	40	121163	S201MTR-C40 DC	2CDS271565R0404	0.120	10
	50	121156	S201MTR-C50 DC	2CDS271565R0504	0.120	10
	63	121149	S201MTR-C63 DC	2CDS271565R0634	0.120	10
2	0,5	136389	S202MTR-C0,5 DC	2CDS272565R0984	0.224	5
	1	121392	S202MTR-C1 DC	2CDS272565R0014	0.224	5
	1,6	136396	S202MTR-C1,6 DC	2CDS272565R0974	0.224	5
	2	119108	S202MTR-C2 DC	2CDS272565R0024	0.224	5
	3	119115	S202MTR-C3 DC	2CDS272565R0034	0.224	5
	4	121576	S202MTR-C4 DC	2CDS272565R0044	0.224	5
	6	121569	S202MTR-C6 DC	2CDS272565R0064	0.224	5
	8	121552	S202MTR-C8 DC	2CDS272565R0084	0.224	5
	10	121545	S202MTR-C10 DC	2CDS272565R0104	0.224	5
	13	136624	S202MTR-C13 DC	2CDS272565R0134	0.230	5
	16	121521	S202MTR-C16 DC	2CDS272565R0164	0.230	5
	20	121514	S202MTR-C20 DC	2CDS272565R0204	0.230	5
	25	121491	S202MTR-C25 DC	2CDS272565R0254	0.230	5
	32	121484	S202MTR-C32 DC	2CDS272565R0324	0.240	5
	40	121477	S202MTR-C40 DC	2CDS272565R0404	0.240	5
	50	121460	S202MTR-C50 DC	2CDS272565R0504	0.240	5
	63	121453	S202MTR-C63 DC	2CDS272565R0634	0.240	5

MCBs

S 200 MTR DC series C characteristic

S 204 MTR DC

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Order details		Weight 1 piece Kg	Pack unit pc.
			Type Code	Order Code		
4	0,5	135931	S204MTR-C0,5 DC	2CDS274565R0984	0.448	1
	1	135948	S204MTR-C1 DC	2CDS274565R0014	0.448	1
	1,6	135955	S204MTR-C1,6 DC	2CDS274565R0974	0.448	1
	2	119405	S204MTR-C2 DC	2CDS274565R0024	0.448	1
	3	119412	S204MTR-C3 DC	2CDS274565R0034	0.448	1
	4	135993	S204MTR-C4 DC	2CDS274565R0044	0.448	1
	6	121798	S204MTR-C6 DC	2CDS274565R0064	0.448	1
	8	121781	S204MTR-C8 DC	2CDS274565R0084	0.448	1
	10	135962	S204MTR-C10 DC	2CDS274565R0104	0.448	1
	13	135979	S204MTR-C13 DC	2CDS274565R0134	0.460	1
	16	135986	S204MTR-C16 DC	2CDS274565R0164	0.460	1
	20	121767	S204MTR-C20 DC	2CDS274565R0204	0.460	1
	25	121743	S204MTR-C25 DC	2CDS274565R0254	0.460	1
	32	121729	S204MTR-C32 DC	2CDS274565R0324	0.480	1
	40	121712	S204MTR-C40 DC	2CDS274565R0404	0.480	1
	50	136013	S204MTR-C50 DC	2CDS274565R0504	0.480	1
	63	121705	S204MTR-C63 DC	2CDS274565R0634	0.480	1

MCBs

S 200 MTR series K characteristic

S 200 MTR DC series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems; special ringtongue connection, dedicated for DC application, please consider polarity dependency marked on device!

Standards: IEC/EN 60947-2 Icu = 15 kA / DC Icu = 10kA

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

S 201 MTR

S 202 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Order details		Weight 1 piece Kg	Pack unit pc.
			Type Code	Order Code		
1	0,5	104241	S201MTR-K0,5	2CDS271447R0157	0.112	10
	1	136839	S201MTR-K1	2CDS271447R0217	0.112	10
	1,6	104340	S201MTR-K1,6	2CDS271447R0257	0.112	10
	2	118828	S201MTR-K2	2CDS271447R0277	0.112	10
	3	118842	S201MTR-K3	2CDS271447R0317	0.112	10
	4	104388	S201MTR-K4	2CDS271447R0337	0.112	10
	6	136822	S201MTR-K6	2CDS271447R0377	0.112	10
	8	104449	S201MTR-K8	2CDS271447R0407	0.112	10
	10	104463	S201MTR-K10	2CDS271447R0427	0.112	10
	13	104487	S201MTR-K13	2CDS271447R0447	0.115	10
	16	104494	S201MTR-K16	2CDS271447R0467	0.115	10
	20	104517	S201MTR-K20	2CDS271447R0487	0.115	10
	25	104555	S201MTR-K25	2CDS271447R0517	0.115	10
	32	104579	S201MTR-K32	2CDS271447R0537	0.120	10
	40	104593	S201MTR-K40	2CDS271447R0557	0.120	10
	50	104616	S201MTR-K50	2CDS271447R0577	0.120	10
	63	104630	S201MTR-K63	2CDS271447R0607	0.120	10
2	0,5	104784	S202MTR-K0,5	2CDS272447R0157	0.224	5
	1	104845	S202MTR-K1	2CDS272447R0217	0.224	5
	1,6	104883	S202MTR-K1,6	2CDS272447R0257	0.224	5
	2	119023	S202MTR-K2	2CDS272447R0277	0.224	5
	3	119047	S202MTR-K3	2CDS272447R0317	0.224	5
	4	104920	S202MTR-K4	2CDS272447R0337	0.224	5
	6	104944	S202MTR-K6	2CDS272447R0377	0.224	5
	8	104982	S202MTR-K8	2CDS272447R0407	0.224	5
	10	105002	S202MTR-K10	2CDS272447R0427	0.224	5
	13	105026	S202MTR-K13	2CDS272447R0447	0.230	5
	16	105033	S202MTR-K16	2CDS272447R0467	0.230	5
	20	105057	S202MTR-K20	2CDS272447R0487	0.230	5
	25	105095	S202MTR-K25	2CDS272447R0517	0.230	5
	32	105118	S202MTR-K32	2CDS272447R0537	0.240	5
	40	105132	S202MTR-K40	2CDS272447R0557	0.240	5
	50	105156	S202MTR-K50	2CDS272447R0577	0.240	5
	63	105170	S202MTR-K63	2CDS272447R0607	0.240	5

MCBs

S 200 MTR series K characteristic

S 203 MTR

S 204 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Order details		Weight 1 piece Kg	Pack unit pc.
			Type Code	Order Code		
3	0,5	105323	S203MTR-K0,5	2CDS273447R0157	0.336	1
	1	105385	S203MTR-K1	2CDS273447R0217	0.336	1
	1,6	105422	S203MTR-K1,6	2CDS273447R0257	0.336	1
	2	119221	S203MTR-K2	2CDS273447R0277	0.336	1
	3	119245	S203MTR-K3	2CDS273447R0317	0.336	1
	4	105460	S203MTR-K4	2CDS273447R0337	0.336	1
	6	105484	S203MTR-K6	2CDS273447R0377	0.336	1
	8	105521	S203MTR-K8	2CDS273447R0407	0.336	1
	10	105545	S203MTR-K10	2CDS273447R0427	0.336	1
	13	105569	S203MTR-K13	2CDS273447R0447	0.345	1
	16	105576	S203MTR-K16	2CDS273447R0467	0.345	1
	20	105590	S203MTR-K20	2CDS273447R0487	0.345	1
	25	105637	S203MTR-K25	2CDS273447R0517	0.345	1
	32	105651	S203MTR-K32	2CDS273447R0537	0.360	1
	40	105675	S203MTR-K40	2CDS273447R0557	0.360	1
	50	105699	S203MTR-K50	2CDS273447R0577	0.360	1
	63	105712	S203MTR-K63	2CDS273447R0607	0.360	1
4	0,5	105866	S204MTR-K0,5	2CDS274447R0157	0.448	1
	1	105927	S204MTR-K1	2CDS274447R0217	0.448	1
	1,6	105965	S204MTR-K1,6	2CDS274447R0257	0.448	1
	2	119320	S204MTR-K2	2CDS274447R0277	0.448	1
	3	119344	S204MTR-K3	2CDS274447R0317	0.448	1
	4	106009	S204MTR-K4	2CDS274447R0337	0.448	1
	6	106023	S204MTR-K6	2CDS274447R0377	0.448	1
	8	106061	S204MTR-K8	2CDS274447R0407	0.448	1
	10	106085	S204MTR-K10	2CDS274447R0427	0.448	1
	13	106108	S204MTR-K13	2CDS274447R0447	0.460	1
	16	106115	S204MTR-K16	2CDS274447R0467	0.460	1
	20	106139	S204MTR-K20	2CDS274447R0487	0.460	1
	25	106177	S204MTR-K25	2CDS274447R0517	0.460	1
	32	106191	S204MTR-K32	2CDS274447R0537	0.480	1
	40	106214	S204MTR-K40	2CDS274447R0557	0.480	1
	50	106238	S204MTR-K50	2CDS274447R0577	0.480	1
	63	106252	S204MTR-K63	2CDS274447R0607	0.480	1

MCBs

S 200 MTR DC series K characteristic

S 200 MTR DC series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems; special ringtongue connection, dedicated for DC application, please consider polarity dependency marked on device!

Standards: IEC/EN 60947-2 Icu = 15 kA / DC Icu = 10 kA

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

S 201 MTR DC

S 202 MTR DC

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Order details		Weight 1 piece Kg	Pack unit pc.
			Type Code	Order Code		
1	0,5	121224	S201MTR-K0,5 DC	2CDS271565R0157	0.112	10
	1	121194	S201MTR-K1 DC	2CDS271565R0217	0.112	10
	1,6	136358	S201MTR-K1,6 DC	2CDS271565R0257	0.112	10
	2	118927	S201MTR-K2 DC	2CDS271565R0277	0.112	10
	3	118941	S201MTR-K3 DC	2CDS271565R0317	0.112	10
	4	136334	S201MTR-K4 DC	2CDS271565R0337	0.112	10
	6	121354	S201MTR-K6 DC	2CDS271565R0377	0.112	10
	8	121347	S201MTR-K8 DC	2CDS271565R0407	0.112	10
	10	121330	S201MTR-K10 DC	2CDS271565R0427	0.112	10
	13	136747	S201MTR-K13 DC	2CDS271565R0447	0.115	10
	16	121323	S201MTR-K16 DC	2CDS271565R0467	0.115	10
	20	121316	S201MTR-K20 DC	2CDS271565R0487	0.115	10
	25	136778	S201MTR-K25 DC	2CDS271565R0517	0.115	10
	32	121293	S201MTR-K32 DC	2CDS271565R0537	0.120	10
	40	121286	S201MTR-K40 DC	2CDS271565R0557	0.120	10
	50	136259	S201MTR-K50 DC	2CDS271565R0577	0.120	10
	63	121279	S201MTR-K63 DC	2CDS271565R0607	0.120	10
2	0,5	121538	S202MTR-K0,5 DC	2CDS272565R0157	0.224	5
	1	136945	S202MTR-K1 DC	2CDS272565R0217	0.224	5
	1,6	136570	S202MTR-K1,6 DC	2CDS272565R0257	0.224	5
	2	119122	S202MTR-K2 DC	2CDS272565R0277	0.224	5
	3	119146	S202MTR-K3 DC	2CDS272565R0317	0.224	5
	4	121668	S202MTR-K4 DC	2CDS272565R0337	0.224	5
	6	121651	S202MTR-K6 DC	2CDS272565R0377	0.224	5
	8	121644	S202MTR-K8 DC	2CDS272565R0407	0.224	5
	10	121637	S202MTR-K10 DC	2CDS272565R0427	0.224	5
	13	136518	S202MTR-K13 DC	2CDS272565R0447	0.230	5
	16	121620	S202MTR-K16 DC	2CDS272565R0467	0.230	5
	20	136495	S202MTR-K20 DC	2CDS272565R0487	0.230	5
	25	121613	S202MTR-K25 DC	2CDS272565R0517	0.230	5
	32	136938	S202MTR-K32 DC	2CDS272565R0537	0.240	5
	40	136440	S202MTR-K40 DC	2CDS272565R0557	0.240	5
	50	121590	S202MTR-K50 DC	2CDS272565R0577	0.240	5
	63	121583	S202MTR-K63 DC	2CDS272565R0607	0.240	5

MCBs

S 200 MTR DC series K characteristic

S 204 MTR DC

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Order details		Weight 1 piece Kg	Pack unit pc.
			Type Code	Order Code		
4	0,5	121774	S204MTR-K0,5 DC	2CDS274565R0157	0.448	1
	1	121750	S204MTR-K1 DC	2CDS274565R0217	0.448	1
	1,6	121736	S204MTR-K1,6 DC	2CDS274565R0257	0.448	1
	2	119429	S204MTR-K2 DC	2CDS274565R0277	0.448	1
	3	119443	S204MTR-K3 DC	2CDS274565R0317	0.448	1
	4	121910	S204MTR-K4 DC	2CDS274565R0337	0.448	1
	6	121903	S204MTR-K6 DC	2CDS274565R0377	0.448	1
	8	121897	S204MTR-K8 DC	2CDS274565R0407	0.448	1
	10	121880	S204MTR-K10 DC	2CDS274565R0427	0.448	1
	13	136020	S204MTR-K13 DC	2CDS274565R0447	0.460	1
	16	121873	S204MTR-K16 DC	2CDS274565R0467	0.460	1
	20	121866	S204MTR-K20 DC	2CDS274565R0487	0.460	1
	25	121859	S204MTR-K25 DC	2CDS274565R0517	0.460	1
	32	121842	S204MTR-K32 DC	2CDS274565R0537	0.480	1
	40	121835	S204MTR-K40 DC	2CDS274565R0557	0.480	1
	50	121828	S204MTR-K50 DC	2CDS274565R0577	0.480	1
	63	121811	S204MTR-K63 DC	2CDS274565R0607	0.480	1

MCBs

S 200 MTR series Z characteristic

S 200 MTR series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems; special ringtongue connection.

Standards: IEC/EN 60947-2 Icu = 15 kA / DC Icu = 10kA

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

S 201 MTR

S 202 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
1	0,5	104258	S201MTR-Z0,5	2CDS271447R0158	0.112	10
	1	104319	S201MTR-Z1	2CDS271447R0218	0.112	10
	1,6	104357	S201MTR-Z1,6	2CDS271447R0258	0.112	10
	2	118835	S201MTR-Z2	2CDS271447R0278	0.112	10
	3	118859	S201MTR-Z3	2CDS271447R0318	0.112	10
	4	104395	S201MTR-Z4	2CDS271447R0338	0.112	10
	6	104418	S201MTR-Z6	2CDS271447R0378	0.112	10
	8	104456	S201MTR-Z8	2CDS271447R0408	0.112	10
	10	104470	S201MTR-Z10	2CDS271447R0428	0.112	10
	16	136815	S201MTR-Z16	2CDS271447R0468	0.115	10
	20	104524	S201MTR-Z20	2CDS271447R0488	0.115	10
	25	104562	S201MTR-Z25	2CDS271447R0518	0.115	10
	32	104586	S201MTR-Z32	2CDS271447R0538	0.120	10
	40	136792	S201MTR-Z40	2CDS271447R0558	0.120	10
	50	104623	S201MTR-Z50	2CDS271447R0578	0.120	10
	63	104647	S201MTR-Z63	2CDS271447R0608	0.120	10
2	0,5	104791	S202MTR-Z0,5	2CDS272447R0158	0.224	5
	1	104852	S202MTR-Z1	2CDS272447R0218	0.224	5
	1,6	104890	S202MTR-Z1,6	2CDS272447R0258	0.224	5
	2	119030	S202MTR-Z2	2CDS272447R0278	0.224	5
	3	119054	S202MTR-Z3	2CDS272447R0318	0.224	5
	4	104937	S202MTR-Z4	2CDS272447R0338	0.224	5
	6	104951	S202MTR-Z6	2CDS272447R0378	0.224	5
	8	104999	S202MTR-Z8	2CDS272447R0408	0.224	5
	10	105019	S202MTR-Z10	2CDS272447R0428	0.224	5
	16	105040	S202MTR-Z16	2CDS272447R0468	0.230	5
	20	105064	S202MTR-Z20	2CDS272447R0488	0.230	5
	25	105101	S202MTR-Z25	2CDS272447R0518	0.230	5
	32	105125	S202MTR-Z32	2CDS272447R0538	0.240	5
	40	105149	S202MTR-Z40	2CDS272447R0558	0.240	5
	50	105163	S202MTR-Z50	2CDS272447R0578	0.240	5
	63	105187	S202MTR-Z63	2CDS272447R0608	0.240	5

MCBs

S 200 MTR series Z characteristic

S 203 MTR

S 204 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
3	0,5	105330	S203MTR-Z0,5	2CDS273447R0158	0.336	1
	1	105392	S203MTR-Z1	2CDS273447R0218	0.336	1
	1,6	105439	S203MTR-Z1,6	2CDS273447R0258	0.336	1
	2	119238	S203MTR-Z2	2CDS273447R0278	0.336	1
	3	119252	S203MTR-Z3	2CDS273447R0318	0.336	1
	4	105477	S203MTR-Z4	2CDS273447R0338	0.336	1
	6	105491	S203MTR-Z6	2CDS273447R0378	0.336	1
	8	105538	S203MTR-Z8	2CDS273447R0408	0.336	1
	10	105552	S203MTR-Z10	2CDS273447R0428	0.336	1
	16	105583	S203MTR-Z16	2CDS273447R0468	0.345	1
	20	136990	S203MTR-Z20	2CDS273447R0488	0.345	1
	25	105644	S203MTR-Z25	2CDS273447R0518	0.345	1
	32	105668	S203MTR-Z32	2CDS273447R0538	0.360	1
	40	105682	S203MTR-Z40	2CDS273447R0558	0.360	1
	50	136983	S203MTR-Z50	2CDS273447R0578	0.360	1
	63	105729	S203MTR-Z63	2CDS273447R0608	0.360	1
4	0,5	105873	S204MTR-Z0,5	2CDS274447R0158	0.448	1
	1	105934	S204MTR-Z1	2CDS274447R0218	0.448	1
	1,6	105972	S204MTR-Z1,6	2CDS274447R0258	0.448	1
	2	119337	S204MTR-Z2	2CDS274447R0278	0.448	10
	3	119351	S204MTR-Z3	2CDS274447R0318	0.448	10
	4	106016	S204MTR-Z4	2CDS274447R0338	0.448	1
	6	106030	S204MTR-Z6	2CDS274447R0378	0.448	1
	8	106078	S204MTR-Z8	2CDS274447R0408	0.448	1
	10	106092	S204MTR-Z10	2CDS274447R0428	0.448	1
	16	106122	S204MTR-Z16	2CDS274447R0468	0.460	1
	20	106146	S204MTR-Z20	2CDS274447R0488	0.460	1
	25	106184	S204MTR-Z25	2CDS274447R0518	0.460	1
	32	106207	S204MTR-Z32	2CDS274447R0538	0.480	1
	40	106221	S204MTR-Z40	2CDS274447R0558	0.480	1
	50	106245	S204MTR-Z50	2CDS274447R0578	0.480	1
	63	106269	S204MTR-Z63	2CDS274447R0608	0.480	1

MCBs

S 200 MTR DC series Z characteristic

S 200 MTR DC series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems; special ringtongue connection, dedicated for DC application, please consider polarity dependency marked on device!

Standards: IEC/EN 60947-2 Icu = 15 kA / DC Icu = 10 kA

Hazard level R26/HL3 according to EN 45545

Category 1 - Class A/B (Body mounted) according to IEC 61373

S 201 MTR DC

S 202 MTR DC

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
1	0,5	121385	S201MTR-Z0,5 DC	2CDS271565R0158	0.112	10
	1	121378	S201MTR-Z1 DC	2CDS271565R0218	0.112	10
	1,6	121361	S201MTR-Z1,6 DC	2CDS271565R0258	0.112	10
	2	118934	S201MTR-Z2 DC	2CDS271565R0278	0.112	10
	3	118958	S201MTR-Z3 DC	2CDS271565R0318	0.112	10
	4	121446	S201MTR-Z4 DC	2CDS271565R0338	0.112	10
	6	121439	S201MTR-Z6 DC	2CDS271565R0378	0.112	10
	8	136310	S201MTR-Z8 DC	2CDS271565R0408	0.112	10
	10	121422	S201MTR-Z10 DC	2CDS271565R0428	0.112	10
	16	121415	S201MTR-Z16 DC	2CDS271565R0468	0.115	10
	20	136297	S201MTR-Z20 DC	2CDS271565R0488	0.115	10
	25	136761	S201MTR-Z25 DC	2CDS271565R0518	0.115	10
	32	136273	S201MTR-Z32 DC	2CDS271565R0538	0.120	10
	40	136266	S201MTR-Z40 DC	2CDS271565R0558	0.120	10
	50	136242	S201MTR-Z50 DC	2CDS271565R0578	0.120	10
	63	136235	S201MTR-Z63 DC	2CDS271565R0608	0.120	10
2	0,5	121699	S202MTR-Z0,5 DC	2CDS272565R0158	0.224	5
	1	121682	S202MTR-Z1 DC	2CDS272565R0218	0.224	5
	1,6	121675	S202MTR-Z1,6 DC	2CDS272565R0258	0.224	5
	2	119139	S202MTR-Z2 DC	2CDS272565R0278	0.224	5
	3	119153	S202MTR-Z3 DC	2CDS272565R0318	0.224	5
	4	136921	S202MTR-Z4 DC	2CDS272565R0338	0.224	5
	6	136556	S202MTR-Z6 DC	2CDS272565R0378	0.224	5
	8	136532	S202MTR-Z8 DC	2CDS272565R0408	0.224	5
	10	136525	S202MTR-Z10 DC	2CDS272565R0428	0.224	5
	16	137072	S202MTR-Z16 DC	2CDS272565R0468	0.230	5
	20	136488	S202MTR-Z20 DC	2CDS272565R0488	0.230	5
	25	136464	S202MTR-Z25 DC	2CDS272565R0518	0.230	5
	32	136457	S202MTR-Z32 DC	2CDS272565R0538	0.240	5
	40	136433	S202MTR-Z40 DC	2CDS272565R0558	0.240	5
	50	136426	S202MTR-Z50 DC	2CDS272565R0578	0.240	5
	63	136419	S202MTR-Z63 DC	2CDS272565R0608	0.240	5

MCBs

S 200 MTR DC series Z characteristic

S 204 MTR DC

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
4	0,5	136037	S204MTR-Z0,5 DC	2CDS274565R0158	0.448	1
	1	136044	S204MTR-Z1 DC	2CDS274565R0218	0.448	1
	1,6	136051	S204MTR-Z1,6 DC	2CDS274565R0258	0.448	1
	2	119436	S204MTR-Z2 DC	2CDS274565R0278	0.448	1
	3	119450	S204MTR-Z3 DC	2CDS274565R0318	0.448	1
	4	136129	S204MTR-Z4 DC	2CDS274565R0338	0.448	1
	6	136150	S204MTR-Z6 DC	2CDS274565R0378	0.448	1
	8	136174	S204MTR-Z8 DC	2CDS274565R0408	0.448	1
	10	136068	S204MTR-Z10 DC	2CDS274565R0428	0.448	1
	16	136075	S204MTR-Z16 DC	2CDS274565R0468	0.460	1
	20	136082	S204MTR-Z20 DC	2CDS274565R0488	0.460	1
	25	136099	S204MTR-Z25 DC	2CDS274565R0518	0.460	1
	32	136112	S204MTR-Z32 DC	2CDS274565R0538	0.480	1
	40	136136	S204MTR-Z40 DC	2CDS274565R0558	0.480	1
	50	136143	S204MTR-Z50 DC	2CDS274565R0578	0.480	1
	63	136167	S204MTR-Z63 DC	2CDS274565R0608	0.480	1

MCBs

ST 200 MTR / ST 200 MTR DC series technical features

ST 200 MTR

		ST200 MTR / ST200 MTR DC
Data acc. to UL1077 / CSA 22.2 No.235	Standards	UL1077 / CSA 22.2 No.235
	Poles	1P, 2P, 3P, 4P for AC 1P, 2P and 4P for DC
	Tripping characteristics	K, Z rated tripping current 1.6 x In (see tripping curve)
	Rated current I_n	0.5 ≤ In ≤ 63A
	Rated frequency f	50/60 and DC (0 Hz)
	Rated insulation voltage Ui	400 VDC (pollution degree 3) 500 VDC (pollution degree 2)
	Overvoltage category	III
	Pollution degree	3
	Rated voltage	480Y / 277 V AC 1P: 250 V DC and 2+4P: up to 500 VDC (pollution degree 2)
	Rated interrupting capacity	6 kA AC 10 kA DC
	Application	Suppl. prot. for general use. Application Codes: TC2, OL0, SC: U1
	Reference temperature for tripping characteristics	25°C

MCBs

ST 200 MTR / ST 200 MTR DC series mechanical features

ST 200 MTR

		ST200 MTR / ST200 MTR DC
Mechanical Data	Housing	Insulation Group I, RAL 7035 according EN45545-2 R22/HL3 and R26/HL 3 (V0 according UL94)
	Toggle	Insulation group II, black, sealable
	Contact position indication	Red/Green indication
	Protection degree acc. to EN 60529	IP20, IP40 in enclosure with cover
	Mechanical endurance	20,000 ops
	Electrical endurance (AC at Ue)	6,000 ops
	Shock resistance acc. to IEC/EN 60068-2-27	25 g - 2 shocks - 13 ms
	Shock resistance acc. to IEC/ EN 61373	Cat 1 / Class B
	Vibration resistance acc. to IEC/EN 60068-2-6	5g - 20 cycle at 5 ...150 ...5 Hz with load 0.8 In
	Vibration resistance acc. to IEC/ EN 61373	Cat 1 / Class B
	NFPA-130	Compliant with ASTME162 and ASTM E 662
	EN 50155	Electronic equipment used on rolling stock According IEC / EN 61373 plus temperature rise test
	Fire behaviour acc. To EN 45545-2	R26/HL3 - R22/HL3
	Fire behaviour acc. To UNI CEI 11170-3	With EN45545-2 replacement
	Fire behaviour acc. To UL 94	V0
	NF F 16-101 (1988) e NF F 16-102 (1992)	With EN45545-2 replacement
	IEC / EN 60077 – 1	Yes
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	28 cycles with 55°C/90-96% and 25°C/95-100%
	Ambient temperature	- 40 ...+75 °C
	Storage temperature	- 40 up to 85 °C
Installation	Terminal	Ring Tongue Terminals
	Cross-section of conductors (top / bottom)	0.75 ....25 mm²
		18 - 4 AWG
	Type of cable	Riged or flexible ring tongue
	Cross-section of busbars (top / bottom)	16 mm² fork or ringtongue busbar
	Tightening Torque	2.8 Nm 25 in-lbs.
	Screwdriver	No. 2 Pozidrive
	Mounting	On Din Rail 35 mm acc. EN 60715 by fast clip
	Mounting position	Any
	Supply	Optional / DC: Please note polarity of device
	Altitude	2,000 m height
Dimension and Weight	Mounting dimensions acc. to DIN 43880	2
	Pole dimensions (H x D x W)	100 x 69 x 17.5
	Pole weight	Approx. 125 g
Combination with aux. elements	Auxiliary contact	Yes S2C Range (except Micro) + existing ring tongue version
	Shunt trip	Yes S2C Range + existing ring tongue version
	Rotary Handle	Yes
	Locking	Yes
	Motor Operating Device	Yes
	Accessories resistance of IEC 61373	Yes

MCBs

ST 200 MTR series K characteristic

ST 200 MTR (DC) series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems; special ringtongue connection for rolling stock applications.

Standards: UL1077, rated interrupting Capacity =6 kA / DC = 10 kA

Hazard level according to NFPA-130

Category 1 - Class A/B (Body mounted) according to IEC

ST 201 MTR

ST 202 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
1	0,5	115681	ST201MTR-K0,5	2CDS271448R0157	0.112	10
	1	115728	ST201MTR-K1	2CDS271448R0217	0.112	10
	1,6	115766	ST201MTR-K1,6	2CDS271448R0257	0.112	10
	2	119627	ST201MTR-K2	2CDS271448R0277	0.112	10
	3	119665	ST201MTR-K3	2CDS271448R0317	0.112	10
	4	115803	ST201MTR-K4	2CDS271448R0337	0.112	10
	5	115841	ST201MTR-K5	2CDS271448R0357	0.112	10
	6	115889	ST201MTR-K6	2CDS271448R0377	0.112	10
	8	115926	ST201MTR-K8	2CDS271448R0407	0.112	10
	10	115964	ST201MTR-K10	2CDS271448R0427	0.112	10
	13	116008	ST201MTR-K13	2CDS271448R0447	0.115	10
	15	116022	ST201MTR-K15	2CDS271448R0457	0.115	10
	16	116060	ST201MTR-K16	2CDS271448R0467	0.115	10
	20	116107	ST201MTR-K20	2CDS271448R0487	0.115	10
	25	116145	ST201MTR-K25	2CDS271448R0517	0.115	10
	30	116183	ST201MTR-K30	2CDS271448R0527	0.120	10
	32	116220	ST201MTR-K32	2CDS271448R0537	0.120	10
	35	116268	ST201MTR-K35	2CDS271448R0547	0.120	10
	40	116305	ST201MTR-K40	2CDS271448R0557	0.120	10
	50	116343	ST201MTR-K50	2CDS271448R0577	0.120	10
	60	116381	ST201MTR-K60	2CDS271448R0587	0.120	10
	63	116428	ST201MTR-K63	2CDS271448R0607	0.120	10
2	0,5	116466	ST202MTR-K0,5	2CDS272448R0157	0.224	5
	1	116503	ST202MTR-K1	2CDS272448R0217	0.224	5
	1,6	116541	ST202MTR-K1,6	2CDS272448R0257	0.224	5
	2	120029	ST202MTR-K2	2CDS272448R0277	0.224	5
	3	120067	ST202MTR-K3	2CDS272448R0317	0.224	5
	4	116589	ST202MTR-K4	2CDS272448R0337	0.224	5
	5	116626	ST202MTR-K5	2CDS272448R0357	0.224	5
	6	116664	ST202MTR-K6	2CDS272448R0377	0.224	5
	8	116701	ST202MTR-K8	2CDS272448R0407	0.224	5
	10	116749	ST202MTR-K10	2CDS272448R0427	0.224	5
	13	116787	ST202MTR-K13	2CDS272448R0447	0.230	5
	15	116800	ST202MTR-K15	2CDS272448R0457	0.230	5
	16	116848	ST202MTR-K16	2CDS272448R0467	0.230	5
	20	116886	ST202MTR-K20	2CDS272448R0487	0.230	5
	25	116923	ST202MTR-K25	2CDS272448R0517	0.230	5
	30	116961	ST202MTR-K30	2CDS272448R0527	0.240	5
	32	117005	ST202MTR-K32	2CDS272448R0537	0.240	5
	35	117043	ST202MTR-K35	2CDS272448R0547	0.240	5
	40	117081	ST202MTR-K40	2CDS272448R0557	0.240	5
	50	117128	ST202MTR-K50	2CDS272448R0577	0.240	5
	60	117166	ST202MTR-K60	2CDS272448R0587	0.240	5
	63	117203	ST202MTR-K63	2CDS272448R0607	0.240	5

MCBs

ST 200 MTR series K characteristic

ST 203 MTR

ST 204 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
3	0,5	117241	ST203MTR-K0,5	2CDS273448R0157	0.336	1
	1	117289	ST203MTR-K1	2CDS273448R0217	0.336	1
	1,6	117326	ST203MTR-K1,6	2CDS273448R0257	0.336	1
	2	120425	ST203MTR-K2	2CDS273448R0277	0.336	1
	3	120463	ST203MTR-K3	2CDS273448R0317	0.336	1
	4	117364	ST203MTR-K4	2CDS273448R0337	0.336	1
	5	117401	ST203MTR-K5	2CDS273448R0357	0.336	1
	6	117449	ST203MTR-K6	2CDS273448R0377	0.336	1
	8	117487	ST203MTR-K8	2CDS273448R0407	0.336	1
	10	117524	ST203MTR-K10	2CDS273448R0427	0.336	1
	13	117562	ST203MTR-K13	2CDS273448R0447	0.345	2
	15	117586	ST203MTR-K15	2CDS273448R0457	0.345	1
	16	117623	ST203MTR-K16	2CDS273448R0467	0.345	1
	20	117661	ST203MTR-K20	2CDS273448R0487	0.345	1
	25	117708	ST203MTR-K25	2CDS273448R0517	0.345	1
	30	117746	ST203MTR-K30	2CDS273448R0527	0.360	1
	32	117784	ST203MTR-K32	2CDS273448R0537	0.360	1
	35	117821	ST203MTR-K35	2CDS273448R0547	0.360	1
	40	117869	ST203MTR-K40	2CDS273448R0557	0.360	1
	50	117906	ST203MTR-K50	2CDS273448R0577	0.360	1
	60	117944	ST203MTR-K60	2CDS273448R0587	0.360	1
	63	117982	ST203MTR-K63	2CDS273448R0607	0.360	1
4	0,5	118026	ST204MTR-K0,5	2CDS274448R0157	0.448	1
	1	118064	ST204MTR-K1	2CDS274448R0217	0.448	1
	1,6	118101	ST204MTR-K1,6	2CDS274448R0257	0.448	1
	2	120623	ST204MTR-K2	2CDS274448R0277	0.448	1
	3	120661	ST204MTR-K3	2CDS274448R0317	0.448	1
	4	118149	ST204MTR-K4	2CDS274448R0337	0.448	1
	5	118187	ST204MTR-K5	2CDS274448R0357	0.448	1
	6	118224	ST204MTR-K6	2CDS274448R0377	0.448	1
	8	118262	ST204MTR-K8	2CDS274448R0407	0.448	1
	10	118309	ST204MTR-K10	2CDS274448R0427	0.448	1
	13	118347	ST204MTR-K13	2CDS274448R0447	0.460	1
	15	118361	ST204MTR-K15	2CDS274448R0457	0.460	1
	16	118408	ST204MTR-K16	2CDS274448R0467	0.460	1
	20	118446	ST204MTR-K20	2CDS274448R0487	0.460	1
	25	118484	ST204MTR-K25	2CDS274448R0517	0.460	1
	30	118521	ST204MTR-K30	2CDS274448R0527	0.480	1
	32	118569	ST204MTR-K32	2CDS274448R0537	0.480	1
	40	118606	ST204MTR-K35	2CDS274448R0547	0.480	1
	50	118644	ST204MTR-K40	2CDS274448R0557	0.480	1
	60	118682	ST204MTR-K50	2CDS274448R0577	0.480	1
	63	118729	ST204MTR-K60	2CDS274448R0587	0.480	1

MCBs

ST 200 MTR DC series K characteristic

ST 200 MTR (DC) series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems; special ringtongue connection for rolling stock applications.

Standards: UL1077, rated interrupting Capacity =6 kA / DC = 10 kA

Hazard level according to NFPA-130

Category 1 - Class A/B (Body mounted) according to IEC 61373

ST 201 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
1	0,5	111782	ST201MTR-K0,5 DC	2CDS271566R0157	0.112	10
	1	111829	ST201MTR-K1 DC	2CDS271566R0217	0.112	10
	1,6	111867	ST201MTR-K1,6 DC	2CDS271566R0257	0.112	10
	2	119825	ST201MTR-K2 DC	2CDS271566R0277	0.112	10
	3	119863	ST201MTR-K3 DC	2CDS271566R0317	0.112	10
	4	111904	ST201MTR-K4 DC	2CDS271566R0337	0.112	10
	5	111942	ST201MTR-K5 DC	2CDS271566R0357	0.112	10
	6	111980	ST201MTR-K6 DC	2CDS271566R0377	0.112	10
	8	112024	ST201MTR-K8 DC	2CDS271566R0407	0.112	10
	10	112062	ST201MTR-K10 DC	2CDS271566R0427	0.112	10
	13	112109	ST201MTR-K13 DC	2CDS271566R0447	0.115	10
	15	112123	ST201MTR-K15 DC	2CDS271566R0457	0.115	10
	16	112161	ST201MTR-K16 DC	2CDS271566R0467	0.115	10
	20	112208	ST201MTR-K20 DC	2CDS271566R0487	0.115	10
	25	112246	ST201MTR-K25 DC	2CDS271566R0517	0.115	10
	30	112284	ST201MTR-K30 DC	2CDS271566R0527	0.120	10
	32	112321	ST201MTR-K32 DC	2CDS271566R0537	0.120	10
	35	112369	ST201MTR-K35 DC	2CDS271566R0547	0.120	10
	40	112406	ST201MTR-K40 DC	2CDS271566R0557	0.120	10
	50	112444	ST201MTR-K50 DC	2CDS271566R0577	0.120	10
	60	112482	ST201MTR-K60 DC	2CDS271566R0587	0.120	10
	63	112529	ST201MTR-K63 DC	2CDS271566R0607	0.120	10
2	0,5	112567	ST202MTR-K0,5 DC	2CDS272566R0157	0.224	5
	1	112604	ST202MTR-K1 DC	2CDS272566R0217	0.224	5
	1,6	112642	ST202MTR-K1,6 DC	2CDS272566R0257	0.224	5
	2	120227	ST202MTR-K2 DC	2CDS272566R0277	0.224	5
	3	120265	ST202MTR-K3 DC	2CDS272566R0317	0.224	5
	4	112680	ST202MTR-K4 DC	2CDS272566R0337	0.224	5
	5	112727	ST202MTR-K5 DC	2CDS272566R0357	0.224	5
	6	112765	ST202MTR-K6 DC	2CDS272566R0377	0.224	5
	8	112802	ST202MTR-K8 DC	2CDS272566R0407	0.224	5
	10	112840	ST202MTR-K10 DC	2CDS272566R0427	0.224	5
	13	112888	ST202MTR-K13 DC	2CDS272566R0447	0.230	5
	15	112901	ST202MTR-K15 DC	2CDS272566R0457	0.230	5
	16	112949	ST202MTR-K16 DC	2CDS272566R0467	0.230	5
	20	112987	ST202MTR-K20 DC	2CDS272566R0487	0.230	5
	25	113021	ST202MTR-K25 DC	2CDS272566R0517	0.230	5
	30	113069	ST202MTR-K30 DC	2CDS272566R0527	0.240	5
	32	113106	ST202MTR-K32 DC	2CDS272566R0537	0.240	5
	35	113144	ST202MTR-K35 DC	2CDS272566R0547	0.240	5
	40	113182	ST202MTR-K40 DC	2CDS272566R0557	0.240	5
	50	113229	ST202MTR-K50 DC	2CDS272566R0577	0.240	5
	60	113267	ST202MTR-K60 DC	2CDS272566R0587	0.240	5
	63	113304	ST202MTR-K63 DC	2CDS272566R0607	0.240	5

ST 201 MTR

Please consider polarity as note above the codes.

MCBs

ST 200 MTR DC series K characteristic

ST 204 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
4	0,5	113342	ST204MTR-K0,5 DC	2CDS274566R0157	0.448	1
	1	113380	ST204MTR-K1 DC	2CDS274566R0217	0.448	1
	1,6	113427	ST204MTR-K1,6 DC	2CDS274566R0257	0.448	1
	2	120821	ST204MTR-K2 DC	2CDS274566R0277	0.448	1
	3	120869	ST204MTR-K3 DC	2CDS274566R0317	0.448	1
	4	113465	ST204MTR-K4 DC	2CDS274566R0337	0.448	1
	5	113502	ST204MTR-K5 DC	2CDS274566R0357	0.448	1
	6	113540	ST204MTR-K6 DC	2CDS274566R0377	0.448	1
	8	113588	ST204MTR-K8 DC	2CDS274566R0407	0.448	1
	10	113625	ST204MTR-K10 DC	2CDS274566R0427	0.448	1
	13	113663	ST204MTR-K13 DC	2CDS274566R0447	0.460	1
	15	113687	ST204MTR-K15 DC	2CDS274566R0457	0.460	1
	16	113724	ST204MTR-K16 DC	2CDS274566R0467	0.460	1
	20	113762	ST204MTR-K20 DC	2CDS274566R0487	0.460	1
	25	113809	ST204MTR-K25 DC	2CDS274566R0517	0.460	1
	30	113847	ST204MTR-K30 DC	2CDS274566R0527	0.480	1
	32	113885	ST204MTR-K32 DC	2CDS274566R0537	0.480	1
	35	113922	ST204MTR-K35 DC	2CDS274566R0547	0.480	1
	40	113960	ST204MTR-K40 DC	2CDS274566R0557	0.480	1
	50	114004	ST204MTR-K50 DC	2CDS274566R0577	0.480	1
	60	114042	ST204MTR-K60 DC	2CDS274566R0587	0.480	1
	63	114080	ST204MTR-K63 DC	2CDS274566R0607	0.480	1

Please consider polarity as note above the codes.

MCBs

ST 200 MTR series Z characteristic

ST 200 MTR (DC) series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems; special ringtongue connection for rolling stock applications.

Standards: UL1077, rated interrupting Capacity =6 kA / DC = 10 kA

Hazard level according to NFPA-130

Category 1 - Class A/B (Body mounted) according to IEC 61373

ST 201 MTR

ST 202 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
1	0,5	115704	ST201MTR-Z0,5	2CDS271448R0158	0.112	10
	1	115742	ST201MTR-Z1	2CDS271448R0218	0.112	10
	1,6	115780	ST201MTR-Z1,6	2CDS271448R0258	0.112	10
	2	119641	ST201MTR-Z2	2CDS271448R0278	0.112	10
	3	119689	ST201MTR-Z3	2CDS271448R0318	0.112	10
	4	115827	ST201MTR-Z4	2CDS271448R0338	0.112	10
	5	115865	ST201MTR-Z5	2CDS271448R0358	0.112	10
	6	115902	ST201MTR-Z6	2CDS271448R0378	0.112	10
	8	115940	ST201MTR-Z8	2CDS271448R0408	0.112	10
	10	115988	ST201MTR-Z10	2CDS271448R0428	0.112	10
	15	116046	ST201MTR-Z15	2CDS271448R0458	0.115	10
	16	116084	ST201MTR-Z16	2CDS271448R0468	0.115	10
	20	116121	ST201MTR-Z20	2CDS271448R0488	0.115	10
	25	116169	ST201MTR-Z25	2CDS271448R0518	0.115	10
	30	116206	ST201MTR-Z30	2CDS271448R0528	0.120	10
	32	116244	ST201MTR-Z32	2CDS271448R0538	0.120	10
	35	116282	ST201MTR-Z35	2CDS271448R0548	0.120	10
	40	116329	ST201MTR-Z40	2CDS271448R0558	0.120	10
	50	116367	ST201MTR-Z50	2CDS271448R0578	0.120	10
	60	116404	ST201MTR-Z60	2CDS271448R0588	0.120	10
	63	116442	ST201MTR-Z63	2CDS271448R0608	0.120	10
2	0,5	116480	ST202MTR-Z0,5	2CDS272448R0158	0.224	5
	1	116527	ST202MTR-Z1	2CDS272448R0218	0.224	5
	1,6	116565	ST202MTR-Z1,6	2CDS272448R0258	0.224	5
	2	120043	ST202MTR-Z2	2CDS272448R0278	0.224	5
	3	120081	ST202MTR-Z3	2CDS272448R0318	0.224	5
	4	116602	ST202MTR-Z4	2CDS272448R0338	0.224	5
	5	116640	ST202MTR-Z5	2CDS272448R0358	0.224	5
	6	116688	ST202MTR-Z6	2CDS272448R0378	0.224	5
	8	116725	ST202MTR-Z8	2CDS272448R0408	0.224	5
	10	116763	ST202MTR-Z10	2CDS272448R0428	0.224	5
	15	116824	ST202MTR-Z15	2CDS272448R0458	0.230	5
	16	116862	ST202MTR-Z16	2CDS272448R0468	0.230	5
	20	116909	ST202MTR-Z20	2CDS272448R0488	0.230	5
	25	116947	ST202MTR-Z25	2CDS272448R0518	0.230	5
	30	116985	ST202MTR-Z30	2CDS272448R0528	0.240	5
	32	117029	ST202MTR-Z32	2CDS272448R0538	0.240	5
	35	117067	ST202MTR-Z35	2CDS272448R0548	0.240	5
	40	117104	ST202MTR-Z40	2CDS272448R0558	0.240	5
	50	117142	ST202MTR-Z50	2CDS272448R0578	0.240	5
	60	117180	ST202MTR-Z60	2CDS272448R0588	0.240	5
	63	117227	ST202MTR-Z63	2CDS272448R0608	0.240	5

MCBs

ST 200 MTR series Z characteristic

ST 203 MTR

ST 204 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
3	0,5	117265	ST203MTR-Z0,5	2CDS273448R0158	0.336	1
	1	117302	ST203MTR-Z1	2CDS273448R0218	0.336	1
	1,6	117340	ST203MTR-Z1,6	2CDS273448R0258	0.336	1
	2	120449	ST203MTR-Z2	2CDS273448R0278	0.336	1
	3	120487	ST203MTR-Z3	2CDS273448R0318	0.336	1
	4	117388	ST203MTR-Z4	2CDS273448R0338	0.336	1
	5	117425	ST203MTR-Z5	2CDS273448R0358	0.336	1
	6	117463	ST203MTR-Z6	2CDS273448R0378	0.336	1
	8	117500	ST203MTR-Z8	2CDS273448R0408	0.336	1
	10	117548	ST203MTR-Z10	2CDS273448R0428	0.336	1
	15	117609	ST203MTR-Z15	2CDS273448R0458	0.345	1
	16	117647	ST203MTR-Z16	2CDS273448R0468	0.345	1
	20	117685	ST203MTR-Z20	2CDS273448R0488	0.345	1
	25	117722	ST203MTR-Z25	2CDS273448R0518	0.345	1
	30	117760	ST203MTR-Z30	2CDS273448R0528	0.360	1
	32	117807	ST203MTR-Z32	2CDS273448R0538	0.360	1
	35	117845	ST203MTR-Z35	2CDS273448R0548	0.360	1
	40	117883	ST203MTR-Z40	2CDS273448R0558	0.360	1
	50	117920	ST203MTR-Z50	2CDS273448R0578	0.360	1
	60	117968	ST203MTR-Z60	2CDS273448R0588	0.360	1
	63	118002	ST203MTR-Z63	2CDS273448R0608	0.360	1
4	0,5	118040	ST204MTR-Z0,5	2CDS274448R0158	0.448	1
	1	118088	ST204MTR-Z1	2CDS274448R0218	0.448	1
	1,6	118125	ST204MTR-Z1,6	2CDS274448R0258	0.448	1
	2	120647	ST204MTR-Z2	2CDS274448R0278	0.448	1
	3	120685	ST204MTR-Z3	2CDS274448R0318	0.448	1
	4	118163	ST204MTR-Z4	2CDS274448R0338	0.448	1
	5	118200	ST204MTR-Z5	2CDS274448R0358	0.448	1
	6	118248	ST204MTR-Z6	2CDS274448R0378	0.448	1
	8	118286	ST204MTR-Z8	2CDS274448R0408	0.448	1
	10	118323	ST204MTR-Z10	2CDS274448R0428	0.448	1
	15	118385	ST204MTR-Z15	2CDS274448R0458	0.460	1
	16	118422	ST204MTR-Z16	2CDS274448R0468	0.460	1
	20	118460	ST204MTR-Z20	2CDS274448R0488	0.460	1
	25	118507	ST204MTR-Z25	2CDS274448R0518	0.460	1
	30	118545	ST204MTR-Z30	2CDS274448R0528	0.480	1
	32	118583	ST204MTR-Z32	2CDS274448R0538	0.480	1
	35	118620	ST204MTR-Z35	2CDS274448R0548	0.480	1
	40	118668	ST204MTR-Z40	2CDS274448R0558	0.480	1
	50	118705	ST204MTR-Z50	2CDS274448R0578	0.480	1
	60	118743	ST204MTR-Z60	2CDS274448R0588	0.480	1
	63	118781	ST204MTR-Z63	2CDS274448R0608	0.480	1

MCBs

ST 200 MTR DC series Z characteristic

ST 200 MTR (DC) series

Function: protection and control of the circuits against overloads and short-circuits; protection of big length cables AC systems; special ringtongue connection for rolling stock applications.

Standards: UL1077, rated interrupting Capacity =6 kA / DC = 10 kA

Hazard level according to NFPA-130

Category 1 - Class A/B (Body mounted) according to IEC 61373

ST 201 MTR

ST 201 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
1	0,5	111805	ST201MTR-Z0,5 DC	2CDS271566R0158	0.112	10
	1	111843	ST201MTR-Z1 DC	2CDS271566R0218	0.112	10
	1,6	111881	ST201MTR-Z1,6 DC	2CDS271566R0258	0.112	10
	2	119849	ST201MTR-Z2 DC	2CDS271566R0278	0.112	10
	3	119887	ST201MTR-Z3 DC	2CDS271566R0318	0.112	10
	4	111928	ST201MTR-Z4 DC	2CDS271566R0338	0.112	10
	5	111966	ST201MTR-Z5 DC	2CDS271566R0358	0.112	10
	6	112000	ST201MTR-Z6 DC	2CDS271566R0378	0.112	10
	8	112048	ST201MTR-Z8 DC	2CDS271566R0408	0.112	10
	10	112086	ST201MTR-Z10 DC	2CDS271566R0428	0.112	10
	15	112147	ST201MTR-Z15 DC	2CDS271566R0458	0.115	10
	16	112185	ST201MTR-Z16 DC	2CDS271566R0468	0.115	10
	20	112222	ST201MTR-Z20 DC	2CDS271566R0488	0.115	10
	25	112260	ST201MTR-Z25 DC	2CDS271566R0518	0.115	10
	30	112307	ST201MTR-Z30 DC	2CDS271566R0528	0.120	10
	32	112345	ST201MTR-Z32 DC	2CDS271566R0538	0.120	10
	35	112383	ST201MTR-Z35 DC	2CDS271566R0548	0.120	10
	40	112420	ST201MTR-Z40 DC	2CDS271566R0558	0.120	10
	50	112468	ST201MTR-Z50 DC	2CDS271566R0578	0.120	10
	60	112505	ST201MTR-Z60 DC	2CDS271566R0588	0.120	10
	63	112543	ST201MTR-Z63 DC	2CDS271566R0608	0.120	10
2	0,5	112581	ST202MTR-Z0,5 DC	2CDS272566R0158	0.224	5
	1	112628	ST202MTR-Z1 DC	2CDS272566R0218	0.224	5
	1,6	112666	ST202MTR-Z1,6 DC	2CDS272566R0258	0.224	5
	2	120241	ST202MTR-Z2 DC	2CDS272566R0278	0.224	5
	3	120289	ST202MTR-Z3 DC	2CDS272566R0318	0.224	5
	4	112703	ST202MTR-Z4 DC	2CDS272566R0338	0.224	5
	5	112741	ST202MTR-Z5 DC	2CDS272566R0358	0.224	5
	6	112789	ST202MTR-Z6 DC	2CDS272566R0378	0.224	5
	8	112826	ST202MTR-Z8 DC	2CDS272566R0408	0.224	5
	10	112864	ST202MTR-Z10 DC	2CDS272566R0428	0.224	5
	15	112925	ST202MTR-Z15 DC	2CDS272566R0458	0.230	5
	16	112963	ST202MTR-Z16 DC	2CDS272566R0468	0.230	5
	20	113007	ST202MTR-Z20 DC	2CDS272566R0488	0.230	5
	25	113045	ST202MTR-Z25 DC	2CDS272566R0518	0.230	5
	30	113083	ST202MTR-Z30 DC	2CDS272566R0528	0.240	5
	32	113120	ST202MTR-Z32 DC	2CDS272566R0538	0.240	5
	35	113168	ST202MTR-Z35 DC	2CDS272566R0548	0.240	5
	40	113205	ST202MTR-Z40 DC	2CDS272566R0558	0.240	5
	50	113243	ST202MTR-Z50 DC	2CDS272566R0578	0.240	5
	60	113281	ST202MTR-Z60 DC	2CDS272566R0588	0.240	5
	63	113328	ST202MTR-Z63 DC	2CDS272566R0608	0.240	5

Please consider polarity as note above the codes.

MCBs

ST 200 MTR DC series Z characteristic

ST 204 MTR

Number of Poles	Rated Current [A]	Bbn 4016779 EAN	Type Code	Order Code	Weight 1 piece Kg	Pack unit pc.
4	0,5	113366	ST204MTR-Z0,5 DC	2CDS274566R0158	0.448	1
	1	113403	ST204MTR-Z1 DC	2CDS274566R0218	0.448	1
	1,6	113441	ST204MTR-Z1,6 DC	2CDS274566R0258	0.448	1
	2	120845	ST204MTR-Z2 DC	2CDS274566R0278	0.448	1
	3	120883	ST204MTR-Z3 DC	2CDS274566R0318	0.448	1
	4	113489	ST204MTR-Z4 DC	2CDS274566R0338	0.448	1
	5	113526	ST204MTR-Z5 DC	2CDS274566R0358	0.448	1
	6	113564	ST204MTR-Z6 DC	2CDS274566R0378	0.448	1
	8	113601	ST204MTR-Z8 DC	2CDS274566R0408	0.448	1
	10	113649	ST204MTR-Z10 DC	2CDS274566R0428	0.448	1
	15	113700	ST204MTR-Z15 DC	2CDS274566R0458	0.460	1
	16	113748	ST204MTR-Z16 DC	2CDS274566R0468	0.460	1
	20	113786	ST204MTR-Z20 DC	2CDS274566R0488	0.460	1
	25	113823	ST204MTR-Z25 DC	2CDS274566R0518	0.460	1
	30	113861	ST204MTR-Z30 DC	2CDS274566R0528	0.480	1
	32	113908	ST204MTR-Z32 DC	2CDS274566R0538	0.480	1
	35	113946	ST204MTR-Z35 DC	2CDS274566R0548	0.480	1
	40	113984	ST204MTR-Z40 DC	2CDS274566R0558	0.480	1
	50	114028	ST204MTR-Z50 DC	2CDS274566R0578	0.480	1
	60	114066	ST204MTR-Z60 DC	2CDS274566R0588	0.480	1
	63	114103	ST204MTR-Z63 DC	2CDS274566R0608	0.480	1

Please consider polarity as note above the codes.

Notes

Selective Main Circuit-Breakers

S 750 DR series acc. to IEC/EN 60947-2

Selective main circuit-breakers (SMCB) of the S 750 DR series are circuit-breakers with particular selectivity functions based on voltage-independent operating principle. This means that they do not rely on a control circuit to make or break contact and are therefore particularly suitable for use in energy distribution-systems with maximum availability requirements. The unique working principle of “current limiting selectivity” offers new approaches for coordination of overcurrent protective devices.

- High short-circuit breaking capability of 25 kA over the complete rated current range
- High energy-limiting capacity by current-limiting selectivity without any configuration
- Suitable for selective overcurrent protection in general purpose electric main distribution boards
- Suitable to disconnect and isolate electric circuits
- Voltage-independent function (no connection to neutral)
- Applicable in installations acc. to: overvoltage category I ... IV, pollution degree 1 ... 3
- For DIN rail mounting
- Isolation function according to IEC 60364-5-53
- Additional contact position indicator RED = ON ; GREEN = OFF
- Lockable and sealable
- For operation by ordinary people

Fields of application

- As main isolating device in meter boards for downstream customer´s installation
- In main distribution boards or switchgear as a selective group or back-up protection device, especially where a high degree of continuity of supply is required, e.g. for installations related to “Safety Services” (IEC 60346-5-56), “Medical Locations” (IEC 60364-7-710) etc.
- For general applications: tripping characteristic E
- For the protection of circuits where high current peaks occur (e.g. inrush currents): tripping characteristic K

Purpose

- Ensure power supply capability over a large temperature range
- Protect wires and cables in case of operational overload or short-circuit
- Additional limitation of let-through current and let-through energy in case of short-circuit tripping in final circuit and therefore less stress for the installation
- Disconnection and isolation of the system, also by ordinary people
- Special selectivity with respect to downstream circuit breakers and upstream fuses
- Ensure a high availability of the electrical power supply

SMCBs

S 750 DR series technical features

S 750 DR

			S 750 DR
General Data	Standards		IEC/EN 60947-2
	Poles		1P, 2P, 3P, 4P
	Tripping characteristics		$E_{selective}$, $K_{selective}$
	Rated current I_n	A	16…100
	Rated frequency f	Hz	50 / 60
Electrical Data acc. to IEC/ EN 60947-2	Rated operational voltage U_e	V AC	230 (1-pole), 400 (2-, 3-, 4-pole)
	Rated breaking capacity I_{cu}	kA	25
	Rated service breaking capacity I_{cs}	kA	12.5
	Rated insulation voltage U_i	V	690
	Selectivity limit current Is1		rated breaking capacity of downstream breaker (min.) – see selectivity tables
	Overvoltage category		IV
	Pollution degree		3
	Rated impulse withstand voltage $U_{imp.}$	kV	6
	Impulse withstand voltage acc. to IEC 60364-5-53 (at 2000m above sea level)	kV	8
	Impulse withstand test voltage (1.2/50µs)	kV	9.8
	Isolation function acc. to IEC 60364-5-53		yes
	Dielectric test voltage (50/60 Hz, 1 min.)	kV	2 (50 / 60 Hz, 1 min.)
Mechanical Data	Contact position indication		via toggle (I-ON / O-OFF), via trip indicator (red-ON / green-OFF)
	IP protection degree acc. to IEC/EN 60529		IP40 (when protected by cabinet cover)
	Shock resistance acc. to IEC / EN 60068-2-27		25 g, min. 3 shocks, duration 13 ms
	Vibration resistance acc. to IEC/EN 60068-2-6		2 g, 20 cycles 5…150…5 Hz
	Environmental conditions (damp heat cyclic) acc. to IEC/EN 60068-2-30	°C/ RH	28 cycles: 55 / 90…96 – 25 / 95…100
	Ambient temperature	°C	-25 … +55
	Storage temperature	°C	-40 … +70
Installation	Wire connection (Top)		frame terminal to connect solid and rigid stranded conductors incl. flexible conductors 2.5…50 mm²
	Wire connection (Bottom)		frame terminal to connect solid and rigid stranded conductors incl. flexible conductors 2.5…50 mm²
	Max. torque	Nm	2.5 … 3
	Recommended Screwdriver		slotted: 1 x 5.5, Pozidrive: PZ 2
	Mounting		DIN rail 35 mm acc. to EN 60715
	Locking		integrated blocking device, additional locking by 3 mm padlock, 1mm seal wire or cabel binder
	Mounting position		any
	Supply		any
Dimensions and weight	Pole dimensions (H x D x W)	mm	see drawings
	Pole weight	g	see order tables
Accessories			3 mm padlock
			auxiliary contact S750DR-aux
			40mm busbar adapter S750DR-QA

Short-circuit selectivity

Selective Main Circuit-Breaker series S 750 DR

Energy limitation

S 750 DR selective main circuit breakers operate in such a way that they support cascaded downstream mcbs when a short-circuit occurs. Its energy-limiting features preserve the installation and reduce harmful repercussions on the network of the operator to a minimum.

Independant of current rating of S 750 DR, short-circuit selectivity of up to 10,000 A or even higher is available for the downstream miniature circuit-breakers.

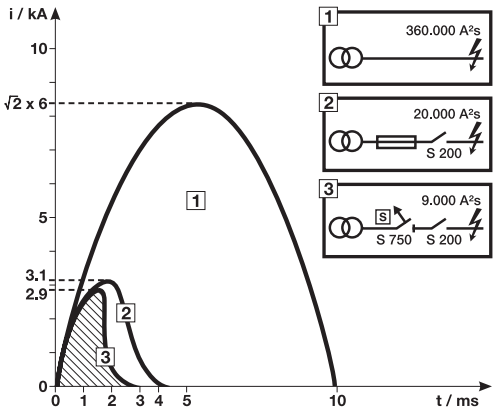

Back-up protection

Main circuit breakers of the S 750 DR series are capable of switching off short-circuit currents of up to 25 kA automatically in networks with a rated voltage of 230 / 400 V. Back-up protection is only necessary if the prospective short-circuit current may exceed 25 kA prosp. at the installation point. Further information on back-up protection is available on request.

SMCBs

S 750 DR series - selective main circuit-breakers, $E_{selective}$ characteristic

S 751 DR

S 752 DR

S 753 DR

S 754 DR

S 750 series DR

Selective main circuit-breakers of the S 750 DR series are SMCBs based on DIN VDE 0641-21 with voltage-independent operating principle. This means that they do not rely on a control circuit to make or break contact (SHU) and are therefore particularly suitable for use in energy distributionsystems with maximum availability requirements. They offer total selectivity to downstream MCBs and outstanding selectivity to upstream protective devices due to unique current limiting selectivity.

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	16	878968	S751DR-E16	2CDH781010R0162		0.35	3
	20	878975	S751DR-E20	2CDH781010R0202		0.35	3
	25	878982	S751DR-E25	2CDH781010R0252		0.35	3
	32	878999	S751DR-E32	2CDH781010R0322		0.35	3
	40	879019	S751DR-E40	2CDH781010R0402		0.35	3
	50	879026	S751DR-E50	2CDH781010R0502		0.35	3
	63	879033	S751DR-E63	2CDH781010R0632		0.35	3
	80	879040	S751DR-E80	2CDH781010R0802		0.40	3
	100	879057	S751DR-E100	2CDH781010R0822		0.40	3
2	16	879361	S752DR-E16	2CDH782010R0162		0.70	2
	20	879378	S752DR-E20	2CDH782010R0202		0.70	2
	25	879385	S752DR-E25	2CDH782010R0252		0.70	2
	32	879392	S752DR-E32	2CDH782010R0322		0.70	2
	40	879415	S752DR-E40	2CDH782010R0402		0.70	2
	50	879422	S752DR-E50	2CDH782010R0502		0.70	2
	63	879439	S752DR-E63	2CDH782010R0632		0.70	2
	80	879446	S752DR-E80	2CDH782010R0802		0.75	2
	100	879453	S752DR-E100	2CDH782010R0822		0.75	2
3	16	879569	S753DR-E16	2CDH783010R0162		1.05	1
	20	879576	S753DR-E20	2CDH783010R0202		1.05	1
	25	879583	S753DR-E25	2CDH783010R0252		1.05	1
	32	879590	S753DR-E32	2CDH783010R0322		1.05	1
	40	879613	S753DR-E40	2CDH783010R0402		1.05	1
	50	879620	S753DR-E50	2CDH783010R0502		1.05	1
	63	879637	S753DR-E63	2CDH783010R0632		1.05	1
	80	879644	S753DR-E80	2CDH783010R0802		1.10	1
	100	879651	S753DR-E100	2CDH783010R0822		1.10	1
4	16	879767	S754DR-E16	2CDH784010R0162		1.40	1
	20	879774	S754DR-E20	2CDH784010R0202		1.40	1
	25	879781	S754DR-E25	2CDH784010R0252		1.40	1
	32	879798	S754DR-E32	2CDH784010R0322		1.40	1
	40	879811	S754DR-E40	2CDH784010R0402		1.40	1
	50	879828	S754DR-E50	2CDH784010R0502		1.40	1
	63	879835	S754DR-E63	2CDH784010R0632		1.40	1
	80	879842	S754DR-E80	2CDH784010R0802		1.45	1
	100	879859	S754DR-E100	2CDH784010R0822		1.45	1

Due to the lack of international product standards for SMCB, S750DR products as given in this catalogue are certified acc. to IEC/EN 60947-2. If requested, S750 (for 40mm busbar systems) and S750DR (for DIN rail mounting) are also available with a certification based on a German SMCB standard. Please contact your ABB office for further information.

SMCBs

S 750 DR series - selective main circuit-breakers, $K_{selective}$ characteristic

S 751 DR

S 752 DR

S 753 DR

S 754 DR

Number of poles	Rated current In A	Bbn 4016779 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	16	879064	S751DR-K16	2CDH781010R0467		0.35	3
	20	879071	S751DR-K20	2CDH781010R0487		0.35	3
	25	879088	S751DR-K25	2CDH781010R0517		0.35	3
	32	879095	S751DR-K32	2CDH781010R0537		0.35	3
	40	879118	S751DR-K40	2CDH781010R0557		0.35	3
	50	879125	S751DR-K50	2CDH781010R0577		0.35	3
	63	879132	S751DR-K63	2CDH781010R0607		0.35	3
	80	879149	S751DR-K80	2CDH781010R0627		0.40	3
	100	879156	S751DR-K100	2CDH781010R0637		0.40	3
2	16	879460	S752DR-K16	2CDH782010R0467		0.70	2
	20	879477	S752DR-K20	2CDH782010R0487		0.70	2
	25	879484	S752DR-K25	2CDH782010R0517		0.70	2
	32	879491	S752DR-K32	2CDH782010R0537		0.70	2
	40	879514	S752DR-K40	2CDH782010R0557		0.70	2
	50	879521	S752DR-K50	2CDH782010R0577		0.70	2
	63	879538	S752DR-K63	2CDH782010R0607		0.70	2
	80	879545	S752DR-K80	2CDH782010R0627		0.75	2
	100	879552	S752DR-K100	2CDH782010R0637		0.75	2
3	16	879668	S753DR-K16	2CDH783010R0467		1.05	1
	20	879675	S753DR-K20	2CDH783010R0487		1.05	1
	25	879682	S753DR-K25	2CDH783010R0517		1.05	1
	32	879699	S753DR-K32	2CDH783010R0537		1.05	1
	40	879712	S753DR-K40	2CDH783010R0557		1.05	1
	50	879729	S753DR-K50	2CDH783010R0577		1.05	1
	63	879736	S753DR-K63	2CDH783010R0607		1.05	1
	80	879743	S753DR-K80	2CDH783010R0627		1.10	1
	100	879750	S753DR-K100	2CDH783010R0637		1.10	1
4	16	879866	S754DR-K16	2CDH784010R0467		1.40	1
	20	879873	S754DR-K20	2CDH784010R0487		1.40	1
	25	879880	S754DR-K25	2CDH784010R0517		1.40	1
	32	879897	S754DR-K32	2CDH784010R0537		1.40	1
	40	879910	S754DR-K40	2CDH784010R0557		1.40	1
	50	879927	S754DR-K50	2CDH784010R0577		1.40	1
	63	879934	S754DR-K63	2CDH784010R0607		1.40	1
	80	879941	S754DR-K80	2CDH784010R0627		1.45	1
	100	879958	S754DR-K100	2CDH784010R0637		1.45	1

Notes

High Performance MCB S800

Incomparable performances to meet the highest demand

Interchangeable terminals
Possibility of having failsafe cage or ringlug terminal connections

Product marking
Clear and easy identification of product name and relevant characteristics

QR code
Quick access to product main details and relevant documentation

Suitable for upgrading your applications
Compatible with a wide range of accessories

Toggle position indication (TPI)
Clear identification of the moving contact (ON-OFF-TRIP)

Contact position indication (CPI)
Clear visualization of the device status

Housing materials
The S800 range is designed with specific plastic materials to satisfy fire and smoke requirements in traction applications.
Plastic material V0 according to UL94 and classified with Hazard level R26/HL3; R22/HL2 according to EN45545-2 standard.

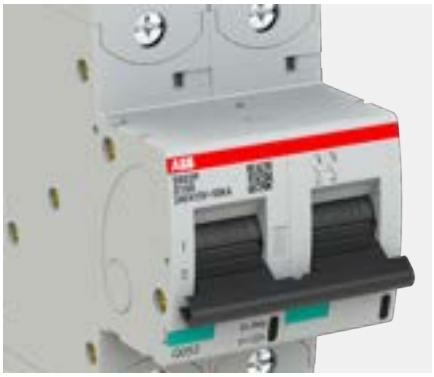

Shock and vibration resistance
The S800 range is tested according to IEC 61373 for Rolling stock equipment – Shock and vibration tests, meeting the requirements Category 1 / Class B.

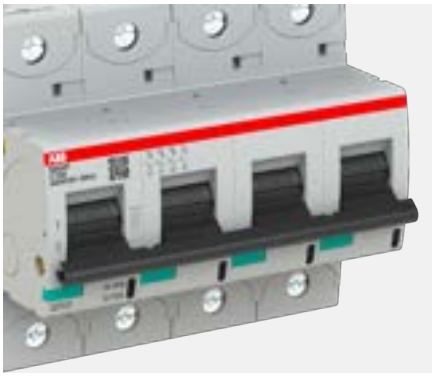

Play it safe: display the operational state
3 status of the device, clearly identified with toggle position: ON-OFF-TRIP.
The trip position in the middle, identifies if the devices has tripped due to overcurrent.
OFF position indicates manual tripping.
In both cases contacts are opened and CPI becomes green.

Cage and ringlug terminals
Interchangeable terminal adapter, makes easy to change from cage to ring terminals, guarantying easy installation with high level of flexibility.
Fast and safe connection of the conductors is ensured by the “onboard terminal shutter” integrated into the body of the terminal, thereby preventing incorrect under-clamping of the connections.

Reliability at high performance
The S800 product series guarantees a complete safe electrical isolation of the circuit in compliance to IEC 60947-2.
It offers high breaking capacity and high rated current to cover different applications.

Wide range of accessories
The S800 range is compatible with a wide range of accessories that extend the functions of the MCB. Functioning not only as a protection device, but also for remote control and monitoring of the installation.
The range of accessories include auxiliary contacts, aux/signal contacts, remote switching unit, short circuit limiter, shunt operation releases, undervoltage releases, RCD block and busbars.

MCBs technical details

S800 range features

Compact high performance MCB with unbeatable short circuit performances

- **Compact**: the S800 series are high performance MCBs with compact dimension in only **27mm width per pole (1.5 module per pole)**.
- **High short circuit capacity**: the series can reach high short circuit performance capacity **up to 50kA** thanks to a specially designed double arcing chamber system, with two arching chambers per pole (except for S800B with only one).
- **Energy and current limiting**: this technology allows not only to reach high short circuit breaking capacity, but also to limit the specific let-through energy and I peak current during a short circuit event.
- **Selectivity and back-up**: selectivity with upstream overcurrent protection devices (fuses, MCCB). Very good back-up performances to downstream protection devices.
- **Compatible with a wide set of accessories** adding additional features to the product.
- **Wide range up to 125A** with different versions to cover several applications

Compliant to standard IEC/EN 60947-2

Standard ranges for whatever application where high performances are required as dat-acenter, industries, hospitals, telecommunication,

- **S800B**: Icu ultimate short-circuit breaking capacity up to **16kA**; rated current **32...63A**
- **S800C**: Icu ultimate short-circuit breaking capacity up to **25kA**; rated current **10...63A**
- **S800N**: Icu ultimate short-circuit breaking capacity up to **36kA**; rated current **6...63A**
- **S800S**: Icu ultimate short-circuit breaking capacity up to **50kA**; rated current **0.5...63A** (with dedicated codes available in ring terminal version and specific KM codes with only magnetic protection)
- **S800P**: Icu ultimate short-circuit breaking capacity up to 50kA; rated current 80, 100, 125 A (with dedicated codes available in Ring terminal version)

Specific ranges for direct current and high voltage applications

UC range non-polarized, for universal current application

- **S800S-UC**: Icu up to 50kA up to 1000 VDC; rated current 0,5...125A (with dedicated codes available in Ring terminal version)

PV range for DC applications and specific for photovoltaic

- **S800PV-SP**: Icu 5kA up to **1500 VDC**; rated current 5...125A, non-polarized
- **S800PV-SD**: **switch disconnector** with Icw 1,5kA up to **1500 VDC**; rated current 32, 63, 125 A
- **S800PV-M-H**: **polarized switch disconnector** with Icw 1,5kA up to **1000 VDC**; rated current 32, 63, 100 A

HV range for high voltage applications in AC as power conversion systems

- **S800HV**: Icu up to 4kA up to **1000 VAC**; rated current 0,5...125A

Compliant to standard UL489

- **S800U**: interrupting rating up to **50kA**; rated current **10...100A**
- **S800U-PV (Photovoltaic)**: interrupting rating **3kA** at **1000 VDC**, rated current **5A**
- **S800U-PVSP (Photovoltaic)**: interrupting rating **3kA** at **1500 VDC**, rated current **5A**
- **S800U-UC (universal current):** interrupting rating **10kA** at **600 VDC**, rated current **10...80A**

Suitable for traction applications

- Plastic materials meeting fire and smoke requirements in traction applications. Plastic material V0 according to UL94 and classified with Hazard level R26/HL3; R22/HL2 according to EN45545-2 standard..
- Range tested according to **IEC 61373** for Rolling stock equipment – Shock and vibration tests, meeting the requirements **Category 1 / Class B**.

MCBs technical details

S800 range features

*Middle position of switch lever, see picture

Play it safe: display the operational state

3 status of the device, clearly identified with toggle position: ON-OFF-TRIP.
The trip position in the middle, identifies if the devices has tripped due to overcurrent.
OFF position indicates manual tripping.
In both cases contacts are opened and CPI becomes green.

In OFF position (0 position), the device guarantees safe electrical isolation of the circuit according to IEC 60947-2 standard.

Cage and ring terminals
S800 series is available with cage terminals plus dedicated codes with ring terminals, meeting the different installation needs.

In addition, interchangeable terminal adapter, makes easy to change from cage to ring terminals, guarantying easy installation with high level of flexibility.
Fast and safe connection of the conductors is ensured by the “onboard terminal shutter” integrated into the body of the terminal, thereby preventing incorrect under-clamping of the connections.

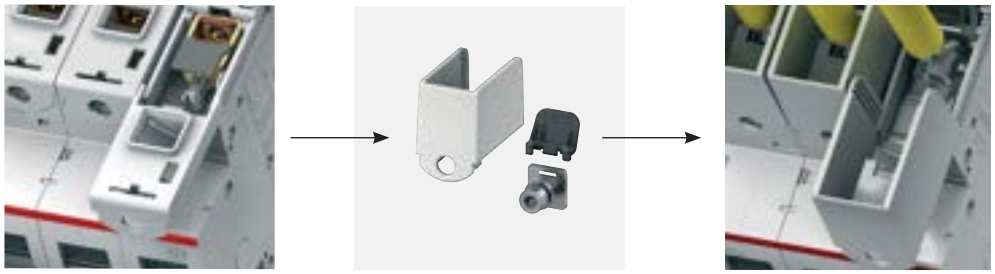

MCBs

S800P series technical features

S800P

		S800P
Performance	Tripping characteristics	B, C, D, K
	Standards	IEC/EN 60947-2, UL 1077 (80, 100 A)
	Number of Poles	1, 2, 3, 4
	Rated current In	80 … 125 A
	Rated frequency f	50/60 Hz
	Rated insulation voltage Ui acc. to IEC/EN 60664-1 (V)	AC 690 V
	Rated impulse withstand voltage Uimp. (1.2/50 µs)	6 kV
	Dielectric test voltage at ind. freq. for 1 min.	2.4 kV
	Overvoltage category	III
	Pollution degree	3
	Suitability for isolation	Yes
(based on internal test only)	Grid distance	50 mm
Data acc. to IEC/EN 60947-2	Rated operational voltage U_e	AC 240/400 V (1-pole) AC 415/690 V (multi-pole) DC 125 V (1-pole) DC 250 V (2-pole) DC 375 V (3-pole) DC 500 V (4-pole)
	Min. operating voltage	AC/DC 12 V
	Rated ultimate short-circuit capacity I_{cu} (Single pole / Multi pole)	AC 240/415 V = 50kA AC 254/440 V = 30 kA AC 289/500 V = 15 kA (80 A) AC 289/500 V = 10 kA (100...125 A) AC 400/690 V = 6 kA (80 A) AC 400/690 V = 4.5 kA (100...125 A) DC 125 V (1-pole) = 30 kA DC 250 V (2-pole) = 30 kA DC 375 V (3-pole) = 30 kA DC 500 V (4-pole) = 30 kA
	Rated service short-circuit capacity I_{cs} (Single pole / Multi pole)	AC 240/415 V = 40 kA
	Reference temperature for tripping characteristics	30°C (Char. B, C, D) 40°C (Char. K)
	Electrical and Mechanical Endurance - cycle (OFF-ON-OFF)	80...100 A: 6000 electrical / 10000 mechanical 125 A: 4000 electrical / 8000 mechanical
Data acc. to IEC/EN 60898-1	Rated short-circuit capacity I_{cn}	Char. B, C, D: AC 230/400 V = 25 kA (80 A) AC 230/400 V = 15 kA (100...125 A)
Data acc. to UL 1077/ C22.2 No 235, Supplementary Protector	Alternating current: int. cap.	1P AC 240 = 20 kA (80…100A) AC 277 = 10 kA (80…100A) 2P, 3P, 4P AC 240 V = 20 kA (80…100A) AC 277 V = 10 kA (80…100A)
	Direct current: int. cap.	DC 125 V (1P) = 10 kA (80…100A) DC 250 V (2P) = 10 kA (80…100A) DC 375 V (3P) = 10 kA (80…100A) DC 500 V (4P) = 10 kA (80…100A)

MCBs

S800P series technical features

S800P

		S800P
Mechanical Data	Housing type	Material group I, RAL 7035
	Toggle type	Black, lockable
	Plastic classification acc. to UL94	V0
	Classification acc. to EN45545-2 component requirement / hazard level	R26 / HL3; R22 / HL2
	Protection degree acc. to EN 60529	IP20; IP40 (under the cover frame)
	Resistance to shock acc. to IEC/EN 60068-2-27	5g / 30ms, Test Ea
	Shock resistance acc. to IEC/EN 61373	5g / 30ms, Cat 1 / Class B
	Resistance to Vibrations acc. to IEC 60068-2-6	5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
	Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	16 hours 70°C
	Environmental condition (damp heat) acc. to IEC/EN 60068-2-30	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
	Environmental condition (low temp) acc. to IEC/EN 60068-2-1	16 hours -25°C
	Ambient temperature (with daily average ≤ +35 °C)	-40....+70°C
	Storage temperature	–40 … +70°C
Installation	Terminal type	Failsafe cage or ringlug terminal
	Connections (top/bottom) – Cu only	1 … 50 flexible mm² 1 … 70 Solid (Rigid / Stranded) mm²
	Tightening torque	3.5 (Nm) 31 (in-lbs)
	Wire stripping length	19 mm
	Screwdriver	POZI 2
	Mounting type	EN 60715
	Mounting position	Any
	Supply from	Top and bottom
Dimensions and Weight	Pole dimensions (H x L x W)	95 x 82.5 x 27* mm
	Pole weight	Ca. 240 g

* On multi-pole versions, rated current 125A is equipped with a lateral cover of 4.5mm on each product side. Overall product width increases of 9mm

	S800-AUX	S800-AUX/ALT	S800-RSU-H	S800W-RSU	S800S-SCL-SR	S800W-SCL-SR	S800HV-SCL-SR	S800-SOR	S800-UVR	DDA 800
Combination with aux. Elements	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes

MCBs

S800S series technical features

		S800S	S803S-KM
General Data			
Tripping characteristics		B, C, D, K,	KM
Standards		IEC/EN 60947-2, EN 60898-1, UL 1077	IEC/EN 60947-2
Number of poles		1 … 4	3
Rated current I_e	A	0.5 … 63	10 … 80
Rated frequency f	Hz	50/60	50/60
Rated insulation voltage U_i acc. to IEC/EN 60664-1	V	AC 690	AC 690
Rated impulse withstand voltage $U_{imp.}$ (1.2/50 µs)	kV	8	8
Dielectric test voltage at ind. freq. for 1 min.	kV	2.4	2.4
Overvoltage category		IV	IV
Pollution degree		3	3
Suitability for isolation		yes	yes
Grid distance	mm	50	-
Data acc. to IEC/EN 60898-1			
Rated operational voltage U_e	V	AC 230/400	-
Min. operating voltage	V	AC 12	-
Rated short-circuit capacity I_{cn}	kA	Char. B, C, D: 230/400 V (10 … 63A) = 25 kA	-
Reference temperature for tripping characteristics	°C	30°C (Char. B, C, D)	
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	10…32 A: 10000 electrical / 10000 mechanical 40…63 A: 6000 electrical / 10000 mechanical	-
Service short-circuit capacity I_{cs}	kA	Char. B, C, D: 230/400 V (10 … 63 A) = 12.5 kA	-
Energy limiting class		3	-
Data acc. to IEC/EN 60947-2			
Rated operational voltage U_e	V	AC 240/400 V (1-pole) AC 415/690 V (multi-pole) DC 125 (1-pole) DC 250 (2-pole) DC 375 (3-pole) DC 500 (4-pole)	AC 415/690 V
Min. operating voltage	V	AC/DC 12 V	AC/DC 12 V
Rated ultimate short-circuit capacity I_{cu} (Single pole / Multi pole)	kA	AC 240/415 V = 50kA AC 254/440 V = 30 kA AC 289/500 V = 15 kA AC 400/690 V = 6 kA DC 125 V (1-pole) = 30 kA DC 250 V (2-pole) = 30 kA DC 375 V (3-pole) = 30 kA DC 500 V (4-pole) = 30 kA	AC 415V = 50kA AC 440V = 30kA AC 690V = 6 kA DC 375 V = 30kA
Rated service short-circuit capacity I_{cs} (Single pole / Multi pole)	kA	AC 240/415 V = 40 kA AC 254/440 V = 22.5 kA AC 289/500 V = 11 kA AC 400/690 V = 4 kA DC 125 V (1-pole) = 30 kA DC 250 V (2-pole) = 30 kA DC 375 V (3-pole) = 30 kA DC 500 V (4-pole) = 30 kA	DC 375 V = 30kA
Reference temperature for tripping characteristics	°C	B, C, D: 30 °C K: 40 °C	only magnetic release
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	0.5…32 A: 10000 electrical / 10000 mechanical 40…63 A: 6000 electrical / 10000 mechanical	10 … 32 A: 10000 electrical/ 10000 mechanical 40 … 80 A: 6000 electrical/ 4000 mechanical

MCBs

S800S series technical features

		S800S / S803S-KM
Data acc. to UL 1077/ C22.2 No 235, Supplementary Protector (only for S800S)		
Alternating current: int. cap.		1 240: 30 (0.5…63A) 277: 14 (0.5…63A) 347: 6 (0.5…63A)
		2,3,4 240: 30 (0.5...63A) 480 Y/277: 14 (0.5…63A) 600 Y/347: 6 (0.5…63A)
Mechanical Data		
Housing type		Material group I, RAL 7035
Toggle type		black, lockable
Plastic classification acc. to UL94		V0
Classification for the component requirement / hazard level acc. to EN45545-2		R26 / HL3; R22 / HL2
Protection degree acc. to EN 60529		IP20; IP40 (actuating end only)
Shock & Vibration Resistance acc. to IEC 61373		5g / 30ms, Cat 1 / Class B
Resistance to shock acc. to IEC/EN 60068-2-27		5g / 30ms, Test Ea
Resistance to Vibrations acc. to IEC 60068-2-6		5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	°C/RH	16 hours 70°C
Environmental condition (low temp) acc. to IEC/EN 60068-2-1	°C/RH	16 hours -40°C
Ambient temperature (with daily average ≤ +35 °C)	°C	-40....+70
Storage temperature	°C	–40 … +70
Installation		
Terminal type		Failsafe cage or ringlug terminal
Connections (top/bottom) – C_u only	mm^2	1 … 50 flexible 1 … 70 solid (rigid or stranded)
	AWG (S800S only)	10 - 30 A: 14 AWG – 2 AWG 40 - 63 A: 14 AWG – 2 AWG
Tightening torque	Nm	3.5
	in-lbs.	31
Wire stripping length	mm	19
Screwdriver		POZI 2
Mounting type		EN 60715
Mounting position		Any
Supply from		Top and bottom
Dimensions and weight		
Pole dimensions (H x L x W)	mm	95 x 82.5 x 27*
Pole weight	g	ca. 240

* On multi-pole versions, rated current 125A is equipped with a lateral cover of 4.5mm on each product side. Overall product width increases of 9mm

	S800-AUX	S800-AUX/ALT	S800-RSU-H	S800W-RSU	S800S-SCL-SR	S800W-SCL-SR	S800HV-SCL-SR	S800-SOR	S800-UVR	DDA800
Combination with aux. Elements	yes	yes	yes	yes	yes	yes	no	yes	yes	yes

MCBs

S800N series technical features

		S800N
General Data		
Tripping characteristics		B, C, D
Standards		IEC/EN 60947-2, EN 60898-1
Number of poles		1 … 4
Rated current I_e	A	6 … 63
Rated frequency f	Hz	50/60
Rated insulation voltage U_i acc. to IEC/EN 60664-1	V	AC 690
Rated impulse withstand voltage $U_{imp.}$ (1.2/50 µs)	kV	8
Dielectric test voltage at ind. freq. for 1 min.	kV	2.4
Overvoltage category		IV
Pollution degree		3
Suitability for isolation		yes
Grid distance	mm	50
Data acc. to IEC/EN 60898-1		
Rated operational voltage U_e	V	AC 230/400
Min. operating voltage	V	AC 12
Rated short-circuit capacity I_{cn}	kA	AC 230/400 V (10 … 63 A) = 20 kA
Reference temperature for tripping characteristics	°C	30°C (Char. B, C, D)
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	10...32 A: 10000 electrical / 10000 mechanical 40...63 A: 6000 electrical / 10000 mechanical
Service short-circuit capacity I_{cs}	kA	230/400 V (10 … 63 A) = 10 kA
Energy limiting class		3
Data acc. to IEC/EN 60947-2		
Rated operational voltage U_e	V	AC 240/400 V (1-pole) AC 415/690 V (multi-pole) DC 125 (1-pole) DC 250 (2-pole) DC 375 (3-pole) DC 500 (4-pole)
Min. operating voltage	V	AC/DC 12 V
Rated ultimate short-circuit capacity I_{cu} (Single pole / Multi pole)	kA	AC 240/415 V = 36 kA AC 254/440 V = 20 kA AC 289/500 V = 10 kA AC 400/690 V = 4.5 kA DC 125 V (1-pole) = 20 kA DC 250 V (2-pole) = 20 kA DC 375 V (3-pole) = 20 kA DC 500 V (4-pole) = 20 kA
Rated service short-circuit capacity I_{cs} (Single pole / Multi pole)	kA	AC 240/415 V = 30 kA AC 254/440 V = 15 kA AC 289/500 V = 8 kA AC 400/690 V = 3 kA DC 125 V (1-pole) = 20 kA DC 250 V (2-pole) = 20 kA DC 375 V (3-pole) = 20 kA DC 500 V (4-pole) = 20 kA
Reference temperature for tripping characteristics	°C	30°C
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	6 … 32 A: 10000 electrical/10000 mechanical 40 … 63 A: 6000 electrical/10000 mechanical
Mechanical Data		
Housing type		Material group I, RAL 7035
Toggle type		black, lockable
Plastic classification acc. to UL94		V0
Classification for the component requirement / hazard level acc. to EN45545-2		R26 / HL3; R22 / HL2
Protection degree acc. to EN 60529		IP20; IP40 (actuating end only)
Shock & Vibration Resistance acc. to IEC 61373		5g / 30ms, Cat 1 / Class B
Resistance to shock acc. to IEC/EN 60068-2-27		5g / 30ms, Test Ea
Resistance to Vibrations acc. to IEC 60068-2-6		5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	°C/RH	16 hours 70°C
Environmental condition (low temp) acc. to IEC/EN 60068-2-1	°C/RH	16 hours -40°C
Ambient temperature (with daily average ≤ +35°C)	°C	–40....70
Storage temperature	°C	– 40 … +70

MCBs

S800N series technical features

		S800N
Installation		
Terminal type		Failsafe cage or ringlug terminal
Connections (top/bottom) – C_u only	mm^2	1 ... 50 flexible 1 ... 70 solid (rigid or stranded)
Tightening torque	Nm	3.5
	in-lbs.	31
Wire stripping length	mm	19
Screwdriver		POZI 2
Mounting type		EN 60715
Mounting position		Any
Supply from		Top and bottom
Dimensions and weight		
Pole dimensions (H x L x W)	mm	95 x 82.5 x 27
Pole weight	g	ca. 240

	S800-AUX	S800-AUX/ALT	S800-RSU-H	S800W-RSU	S800S-SCL-SR	S800W-SCL-SR	S800HV-SCL-SR	S800-SOR	S800-UVR	DDA800
Combination with aux. Elements	yes	yes	yes	yes	yes	yes	no	yes	yes	yes

MCBs

S800C series technical features

		S800C
General Data		
Tripping characteristics		B, C, D, K
Standards		IEC/EN 60947-2,EN 60898-1, UL 1077
Number of poles		1 … 4
Rated current I_e	A	10 … 63
Rated frequency f	Hz	50/60
Rated insulation voltage U_i acc. to IEC/EN 60664-1	V	AC 500
Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)	kV	8
Dielectric test voltage at ind. freq. for 1 min.	kV	2.4
Overvoltage category		IV
Pollution degree		3
Suitability for isolation		yes
Grid distance	mm	50
Data acc. to IEC/EN 60898-1		
Rated operational voltage U_e	V	AC 230/400
Min. operating voltage	V	AC 12
Rated short-circuit capacity I_{cn}	kA	15 kA
Reference temperature for tripping characteristics	°C	30°C (Char. B, C, D)
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	10 … 32 A: 10000 electrical/10000 mechanical 40 … 63 A: 6000 electrical/10000 mechanical
Service short-circuit capacity I_{cs}	kA	Char. B, C, D: 230/400 V = 7.5 kA
Energy limiting class		3
Data acc. to IEC/EN 60947-2		
Rated operational voltage U_e	V	AC 240/254 V (1-pole) AC 415/440 V (multi-pole) DC 125 (1-pole) DC 250 (2-pole) DC 375 (3-pole) DC 500 (4-pole)
Min. operating voltage	V	AC/DC 12 V
Rated ultimate short-circuit capacity I_{cu} (Single pole / Multi pole)	kA	AC 240/415 V = 25 kA AC 254/440 V = 15 kA DC 125 V (1-pole) = 10 kA DC 250 V (2-pole) = 10 kA DC 375 V (3-pole) = 10 kA DC 500 V (4-pole) = 10 kA
Rated service short-circuit capacity I_{cs} (Single pole / Multi pole)	kA	AC 240/415 V = 25kA AC 254/440 V = 10 kA DC 125 V (1-pole) = 10 kA DC 250 V (2-pole) = 10 kA DC 375 V (3-pole) = 10 kA DC 500 V (4-pole) = 10 kA
Reference temperature for tripping characteristics	°C	B, C, D: 30 °C K: 40 °C
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	6 … 32 A: 10000 electrical/10000 mechanical 40 … 63A: 6000 electrical/10000 mechanical
Mechanical Data		
Housing type		Material group I, RAL 7035
Toggle type		black, lockable
Plastic classification acc. to UL94		V0
Classification for the component requirement / hazard level acc. to EN45545-2		R26 / HL3; R22 / HL2
Protection degree acc. to EN 60529		IP20; IP40 (actuating end only)
Shock & Vibration Resistance acc. to IEC 61373		5g / 30ms, Cat 1 / Class B
Resistance to shock acc. to IEC/EN 60068-2-27		5g / 30ms, Test Ea
Resistance to Vibrations acc. to IEC 60068-2-6		5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	°C/RH	16 hours 70°C
Environmental condition (low temp) acc. to IEC/EN 60068-2-1		16 hours -40°C
Ambient temperature (with daily average ≤ +35°C)	°C	–40....+70
Storage temperature	°C	–40 … +70
Data acc. to UL 1077/ C22.2 No 235, Supplementary Protector		
Alternating current: int. cap.		1P AC 240 = 20 kA AC 277 = 10 kA 2P, 3P, 4P AC 240 V = 20 kA AC 277 V = 10 kA
Direct current: int. cap.		DC 125 V (1P) = 10 kA DC 250 V (2P) = 10 kA DC 375 V (3P) = 10 kA DC 500 V (4P) = 10 kA

MCBs

S800C series technical features

		S800C
Installation		
Terminal type		Failsafe cage or ringlug terminal
Connections (top/bottom) – C_u only	mm^2	1 … 50 flexible 1 … 70 solid (rigid or stranded)
	AWG	10 - 30 A: 14 AWG – 2 AWG 40 - 63 A: 14 AWG – 2 AWG
Tightening torque	Nm	3.5
	in-lbs.	31
Wire stripping length	mm	19
Screwdriver		POZI 2
Mounting type		EN 60715
Mounting position		Any
Supply from		Top and bottom
Dimensions and weight		
Pole dimensions (H x L x W)	mm	95 x 82.5 x 27
Pole weight	g	ca. 240

	S800-AUX	S800-AUX/ALT	S800-RSU-H	S800W-RSU	S800S-SCL-SR	S800W-SCL-SR	S800HV-SCL-SR	S800-SOR	S800-UVR	DDA800
Combination with aux. Elements	yes	yes	yes	yes	yes	yes	no	yes	yes	yes

MCBs

S800B series technical features

		S800B
General Data		
Tripping characteristics		B, C, D, K
Standards		IEC/EN 60947-2,EN 60898-1
Number of poles		1 … 4
Rated current I_e	A	32 … 63
Rated frequency f	Hz	50/60
Rated insulation voltage U_i acc. to IEC/EN 60664-1	V	AC 500
Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)	kV	6
Dielectric test voltage at ind. freq. for 1 min.	kV	1.8
Overvoltage category		III
Pollution degree		3
Suitability for isolation		yes
Grid distance	mm	50
Data acc. to IEC/EN 60898-1		
Rated operational voltage U_e	V	AC 230/400
Min. operating voltage	V	AC 12
Rated short-circuit capacity I_{cn}	kA	AC 230/400 = 10kA
Reference temperature for tripping characteristics	°C	B, C, D: 30°C
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	4000
Service short-circuit capacity I_{cs}	kA	AC 230/400V = 7.5kA
Data acc. to IEC/EN 60947-2		
Rated operational voltage U_e	V	AC 230/400
Min. operating voltage	V	AC/DC 12 V
Rated ultimate short-circuit capacity I_{cu}	kA	AC 230/400 V = 16 kA DC 75 V (1-pole) = 10 kA DC 150 V (2-pole) = 10 kA DC 225 V (3-pole = 10 kA DC 300 V (4-pole) = 10 kA
Rated service short-circuit capacity I_{cs}	kA	10kA
Reference temperature for tripping characteristics	°C	B, C, D: 30°C K: 40 °C
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	32...63 A: 1500 electrical / 10000 mechanical
Energy limiting class		3
Mechanical Data		
Housing type		Material group I, RAL 7035
Toggle type		black, lockable
Plastic classification acc. to UL94		V0
Protection degree acc. to EN 60529		IP20; IP40 (actuating end only)
Resistance to shock acc. to IEC/EN 60068-2-27		5g / 30ms, Test Ea
Shock resistance acc. To IEC/EN 61373		5g / 30ms, Cat 1 / Class B
Resistance to Vibrations acc. to IEC 60068-2-6		5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	°C/RH	16 hours 70°C
Environmental condition (low temp) acc. to IEC/EN 60068-2-1		16 hours -40°C
Ambient temperature (with daily average ≤ +35°C)	°C	-40....+70
Storage temperature	°C	–40 … +70
Installation		
Terminal type		Failsafe cage or ringlug terminal
Connections (top/bottom) – C_u only	mm^2	1 … 50 flexible 1 … 70 solid (rigid or stranded)
Tightening torque	Nm	3.5
	in-lbs.	31
Wire stripping length	mm	19
Screwdriver		POZI 2
Mounting type		EN 60715
Mounting position		Any
Supply from		Top and bottom
Dimensions and weight		
Pole dimensions (H x L x W)	mm	95 x 82.5 x 27
Pole weight	g	ca. 240

	S800-AUX	S800-AUX/ALT	S800-RSU-H	S800W-RSU	S800S-SCL-SR	S800W-SCL-SR	S800HV-SCL-SR	S800-SOR	S800-UVR	DDA800
Combination with aux. Elements	yes	yes	yes	yes	no	no	no	yes	yes	yes

High performance MCBs

S800P series, B characteristic

S800P

S800P - B Characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=50kA

Number of poles	Rated current [A]	Bbn 7612271 EAN	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	80	516833	S801P-B80	2CCG001214R0001	0.245	1
	100	516840	S801P-B100	2CCG001215R0001	0.245	1
	125	516857	S801P-B125	2CCG001216R0001	0.245	1
2	80	516864	S802P-B80	2CCG001217R0001	0.490	1
	100	516871	S802P-B100	2CCG001218R0001	0.490	1
	125	516888	S802P-B125	2CCG001219R0001	0.515	1
3	80	516895	S803P-B80	2CCG001220R0001	0.740	1
	100	516901	S803P-B100	2CCG001221R0001	0.740	1
	125	516918	S803P-B125	2CCG001222R0001	0.765	1
4	80	516925	S804P-B80	2CCG001223R0001	0.980	1
	100	516932	S804P-B100	2CCG001224R0001	0.980	1
	125	516949	S804P-B125	2CCG001225R0001	1.005	1

S800P

S800P - B Characteristic with ringlug terminal connection

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=50kA

Number of poles	Rated current [A]	Bbn 7612271 EAN	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	80	517311	S801P-B80-R	2CCG001262R0001	0.255	1
	100	517472	S801P-B100-R	2CCG001278R0001	0.255	1
	125	517632	S801P-B125-R	2CCG001294R0001	0.255	1
2	80	517359	S802P-B80-R	2CCG001266R0001	0.510	1
	100	517519	S802P-B100-R	2CCG001282R0001	0.510	1
	125	517670	S802P-B125-R	2CCG001298R0001	0.535	1
3	80	517397	S803P-B80-R	2CCG001270R0001	0.761	1
	100	517557	S803P-B100-R	2CCG001286R0001	0.761	1
	125	517717	S803P-B125-R	2CCG001302R0001	0.790	1
4	80	517434	S804P-B80-R	2CCG001274R0001	1.015	1
	100	517595	S804P-B100-R	2CCG001290R0001	1.015	1
	125	517755	S804P-B125-R	2CCG001306R0001	1.045	1

High performance MCBs

S800P series, C characteristic

S800P - C Characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for resistive and inductive loads with low inrush current; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=50kA

S800P

Number of poles	Rated current [A]	Bbn 7612271 EAN	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	80	516956	S801P-C80	2CCG001226R0001	0.245	1
	100	516963	S801P-C100	2CCG001227R0001	0.245	1
	125	516970	S801P-C125	2CCG001228R0001	0.245	1
2	80	516987	S802P-C80	2CCG001229R0001	0.490	1
	100	516994	S802P-C100	2CCG001230R0001	0.490	1
	125	517007	S802P-C125	2CCG001231R0001	0.515	1
3	80	517014	S803P-C80	2CCG001232R0001	0.740	1
	100	517021	S803P-C100	2CCG001233R0001	0.740	1
	125	517038	S803P-C125	2CCG001234R0001	0.765	1
4	80	517045	S804P-C80	2CCG001235R0001	0.980	1
	100	517052	S804P-C100	2CCG001236R0001	0.980	1
	125	517069	S804P-C125	2CCG001237R0001	1.005	1

S800P - C Characteristic with ringlug terminal connection

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for resistive and inductive loads with low inrush current; ery useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=50kA

S800P

Number of poles	Rated current [A]	Bbn 7612271 EAN	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	80	517328	S801P-C80-R	2CCG001263R0001	0.255	1
	100	517489	S801P-C100-R	2CCG001279R0001	0.255	1
	125	517649	S801P-C125-R	2CCG001295R0001	0.255	1
2	80	517366	S802P-C80-R	2CCG001267R0001	0.510	1
	100	517526	S802P-C100-R	2CCG001283R0001	0.510	1
	125	517687	S802P-C125-R	2CCG001299R0001	0.535	1
3	80	517403	S803P-C80-R	2CCG001271R0001	0.761	1
	100	517564	S803P-C100-R	2CCG001287R0001	0.761	1
	125	517724	S803P-C125-R	2CCG001303R0001	0.790	1
4	80	517441	S804P-C80-R	2CCG001275R0001	1.015	1
	100	517601	S804P-C100-R	2CCG001291R0001	1.015	1
	125	517762	S804P-C125-R	2CCG001307R0001	1.045	1

High performance MCBs

S800P series, D characteristic

S800P

S800P - D Characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for circuits which supply loads with high inrush current at the circuit closing (motors, LV / LV transformers, breakdown lamps); very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60947-2

Icu=50kA

Number of poles	Rated current [A]	Bbn 7612271 EAN	Order details Type Code	Order code	Weight [kg]	Pack. unit
1	80	517076	S801P-D80	2CCG001238R0001	0.245	1
	100	517083	S801P-D100	2CCG001239R0001	0.245	1
	125	517090	S801P-D125	2CCG001240R0001	0.245	1
2	80	517106	S802P-D80	2CCG001241R0001	0.490	1
	100	517113	S802P-D100	2CCG001242R0001	0.490	1
	125	517120	S802P-D125	2CCG001243R0001	0.515	1
3	80	517137	S803P-D80	2CCG001244R0001	0.740	1
	100	517144	S803P-D100	2CCG001245R0001	0.740	1
	125	517151	S803P-D125	2CCG001246R0001	0.765	1
4	80	517168	S804P-D80	2CCG001247R0001	0.980	1
	100	517175	S804P-D100	2CCG001248R0001	0.980	1
	125	517182	S804P-D125	2CCG001249R0001	1.005	1

S800P - D Characteristic with ringlug terminal connection

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for circuits which supply loads with high inrush current at the circuit closing (motors, LV / LV transformers, breakdown lamps); very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60947-2

Icu=50kA

S800P

Number of poles	Rated current [A]	Bbn 7612271 EAN	Order details Type Code	Order code	Weight [kg]	Pack. unit
1	80	517335	S801P-D80-R	2CCG001264R0001	0.255	1
	100	517496	S801P-D100-R	2CCG001280R0001	0.255	1
	125	517656	S801P-D125-R	2CCG001296R0001	0.255	1
2	80	517373	S802P-D80-R	2CCG001268R0001	0.510	1
	100	517533	S802P-D100-R	2CCG001284R0001	0.510	1
	125	517694	S802P-D125-R	2CCG001300R0001	0.535	1
3	80	517410	S803P-D80-R	2CCG001272R0001	0.761	1
	100	517571	S803P-D100-R	2CCG001288R0001	0.761	1
	125	517731	S803P-D125-R	2CCG001304R0001	0.790	1
4	80	517458	S804P-D80-R	2CCG001276R0001	1.015	1
	100	517618	S804P-D100-R	2CCG001292R0001	1.015	1
	125	517779	S804P-D125-R	2CCG001308R0001	1.045	1

High performance MCBs

S800P series, K characteristic

S800P - K Characteristic
Function: protection and control of the circuits like motors, transformer and auxiliary circuits, against overloads and short-circuits when a high breaking capacity is required; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.
Advantages: no nuisance tripping in the case of functional peak currents up to 10xIn, depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=50kA

S800P

Number of poles	Rated current [A]	Bbn 7612271 EAN	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	80	517199	S801P-K80	2CCG001250R0001	0.245	1
	100	517205	S801P-K100	2CCG001251R0001	0.245	1
	125	517212	S801P-K125	2CCG001252R0001	0.245	1
2	80	517229	S802P-K80	2CCG001253R0001	0.490	1
	100	517236	S802P-K100	2CCG001254R0001	0.490	1
	125	517243	S802P-K125	2CCG001255R0001	0.515	1
3	80	517250	S803P-K80	2CCG001256R0001	0.740	1
	100	517267	S803P-K100	2CCG001257R0001	0.740	1
	125	517274	S803P-K125	2CCG001258R0001	0.765	1
4	80	517281	S804P-K80	2CCG001259R0001	0.980	1
	100	517298	S804P-K100	2CCG001260R0001	0.980	1
	125	517304	S804P-K125	2CCG001261R0001	1.005	1

S800P - K Characteristic with ringlug terminal connection
Function: protection and control of the circuits like motors, transformer and auxiliary circuits, against overloads and short-circuits when a high breaking capacity is required; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.
Advantages: no nuisance tripping in the case of functional peak currents up to 10xIn, depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=50kA

S800P

Number of poles	Rated current [A]	Bbn 7612271 EAN	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	80	517342	S801P-K80-R	2CCG001265R0001	0.255	1
	100	517502	S801P-K100-R	2CCG001281R0001	0.255	1
	125	517663	S801P-K125-R	2CCG001297R0001	0.255	1
2	80	517380	S802P-K80-R	2CCG001269R0001	0.510	1
	100	517540	S802P-K100-R	2CCG001285R0001	0.510	1
	125	517700	S802P-K125-R	2CCG001301R0001	0.535	1
3	80	517427	S803P-K80-R	2CCG001273R0001	0.761	1
	100	517588	S803P-K100-R	2CCG001289R0001	0.761	1
	125	517748	S803P-K125-R	2CCG001305R0001	0.790	1
4	80	517465	S804P-K80-R	2CCG001277R0001	1.015	1
	100	517625	S804P-K100-R	2CCG001293R0001	1.015	1
	125	517786	S804P-K125-R	2CCG001309R0001	1.045	1

High performance MCBs

S800S series with cage terminal, B characteristic

S801S

S802S

S800S-B characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60898, IEC/EN 60947-2, UL 1077, supplementary protector

Icn=25kA

Icu=50kA

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	0.5	498979	S801S-B0,5	2CCF019841R0001	0.24	1
	1	498986	S801S-B1	2CCF019842R0001	0.24	1
	1.6	498993	S801S-B1,6	2CCF019843R0001	0.24	1
	2	499105	S801S-B2	2CCF019844R0001	0.24	1
	2.5	499112	S801S-B2,5	2CCF019845R0001	0.24	1
	3	499129	S801S-B3	2CCF019846R0001	0.24	1
	4	499136	S801S-B4	2CCF019847R0001	0.24	1
	5	499143	S801S-B5	2CCF019848R0001	0.24	1
	6	408107	S801S-B6	2CCS861001R0065	0.24	1
	8	411329	S801S-B8	2CCS861001R0085	0.24	1
	10	200008	S801S-B10	2CCS861001R0105	0.24	1
	13	200015	S801S-B13	2CCS861001R0135	0.24	1
	16	200022	S801S-B16	2CCS861001R0165	0.24	1
	20	200039	S801S-B20	2CCS861001R0205	0.24	1
	25	200046	S801S-B25	2CCS861001R0255	0.24	1
	32	200053	S801S-B32	2CCS861001R0325	0.24	1
	40	200060	S801S-B40	2CCS861001R0405	0.24	1
	50	200077	S801S-B50	2CCS861001R0505	0.24	1
	63	200084	S801S-B63	2CCS861001R0635	0.24	1
2	0.5	499310	S802S-B0,5	2CCF019865R0001	0.49	1
	1	499327	S802S-B1	2CCF019866R0001	0.49	1
	1.6	499334	S802S-B1,6	2CCF019867R0001	0.49	1
	2	499341	S802S-B2	2CCF019868R0001	0.49	1
	2.5	499358	S802S-B2,5	2CCF019869R0001	0.49	1
	3	499365	S802S-B3	2CCF019870R0001	0.49	1
	4	499372	S802S-B4	2CCF019871R0001	0.49	1
	5	499389	S802S-B5	2CCF019872R0001	0.49	1
	6	408114	S802S-B6	2CCS862001R0065	0.49	1
	8	411336	S802S-B8	2CCS862001R0085	0.49	1
	10	200121	S802S-B10	2CCS862001R0105	0.49	1
	13	200138	S802S-B13	2CCS862001R0135	0.49	1
	16	200145	S802S-B16	2CCS862001R0165	0.49	1
	20	200152	S802S-B20	2CCS862001R0205	0.49	1
	25	200169	S802S-B25	2CCS862001R0255	0.49	1
	32	200176	S802S-B32	2CCS862001R0325	0.49	1
	40	200183	S802S-B40	2CCS862001R0405	0.49	1
	50	200190	S802S-B50	2CCS862001R0505	0.49	1
	63	200206	S802S-B63	2CCS862001R0635	0.49	1

High performance MCBs

S800S series with cage terminal, B characteristic

S803S

S804S

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
3	0.5	499556	S803S-B0,5	2CCF019889R0001	0.74	1
	1	499563	S803S-B1	2CCF019890R0001	0.74	1
	1.6	499570	S803S-B1,6	2CCF019891R0001	0.74	1
	2	499587	S803S-B2	2CCF019892R0001	0.74	1
	2.5	499594	S803S-B2,5	2CCF019893R0001	0.74	1
	3	499600	S803S-B3	2CCF019894R0001	0.74	1
	4	499617	S803S-B4	2CCF019895R0001	0.74	1
	5	499624	S803S-B5	2CCF019896R0001	0.74	1
	6	408121	S803S-B6	2CCS863001R0065	0.74	1
	8	411343	S803S-B8	2CCS863001R0085	0.74	1
	10	200244	S803S-B10	2CCS863001R0105	0.74	1
	13	200251	S803S-B13	2CCS863001R0135	0.74	1
	16	200268	S803S-B16	2CCS863001R0165	0.74	1
	20	200275	S803S-B20	2CCS863001R0205	0.74	1
	25	200282	S803S-B25	2CCS863001R0255	0.74	1
	32	200299	S803S-B32	2CCS863001R0325	0.74	1
	40	200305	S803S-B40	2CCS863001R0405	0.74	1
	50	200312	S803S-B50	2CCS863001R0505	0.74	1
	63	200329	S803S-B63	2CCS863001R0635	0.74	1
4	0.5	499792	S804S-B0,5	2CCF019913R0001	0.98	1
	1	499808	S804S-B1	2CCF019914R0001	0.98	1
	1.6	499815	S804S-B1,6	2CCF019915R0001	0.98	1
	2	499822	S804S-B2	2CCF019916R0001	0.98	1
	2.5	499839	S804S-B2,5	2CCF019917R0001	0.98	1
	3	499846	S804S-B3	2CCF019918R0001	0.98	1
	4	499853	S804S-B4	2CCF019919R0001	0.98	1
	5	499860	S804S-B5	2CCF019920R0001	0.98	1
	6	408138	S804S-B6	2CCS864001R0065	0.98	1
	8	411350	S804S-B8	2CCS864001R0085	0.98	1
	10	200367	S804S-B10	2CCS864001R0105	0.98	1
	13	200374	S804S-B13	2CCS864001R0135	0.98	1
	16	200381	S804S-B16	2CCS864001R0165	0.98	1
	20	200398	S804S-B20	2CCS864001R0205	0.98	1
	25	200404	S804S-B25	2CCS864001R0255	0.98	1
	32	200411	S804S-B32	2CCS864001R0325	0.98	1
	40	200428	S804S-B40	2CCS864001R0405	0.98	1
	50	200435	S804S-B50	2CCS864001R0505	0.98	1
	63	200442	S804S-B63	2CCS864001R0635	0.98	1

High performance MCBs

S800S series with ring terminal connection, B characteristic

S801S

S802S

S800S-B characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60898, IEC/EN 60947-2, UL 1077, supplementary protector

Icn=25kA

Icu=50kA

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	6	408268	S801S-B6-R	2CCS861002R0065		0.245	1
	8	411480	S801S-B8-R	2CCS861002R0085		0.245	1
	10	209636	S801S-B10-R	2CCS861002R0105		0.245	1
	13	209643	S801S-B13-R	2CCS861002R0135		0.245	1
	16	209650	S801S-B16-R	2CCS861002R0165		0.245	1
	20	209667	S801S-B20-R	2CCS861002R0205		0.245	1
	25	209674	S801S-B25-R	2CCS861002R0255		0.245	1
	32	209681	S801S-B32-R	2CCS861002R0325		0.245	1
	40	206826	S801S-B40-R	2CCS861002R0405		0.245	1
	50	206833	S801S-B50-R	2CCS861002R0505		0.245	1
	63	206840	S801S-B63-R	2CCS861002R0635		0.245	1
2	6	408275	S802S-B6-R	2CCS862002R0065		0.49	1
	8	411497	S802S-B8-R	2CCS862002R0085		0.49	1
	10	209698	S802S-B10-R	2CCS862002R0105		0.49	1
	13	209704	S802S-B13-R	2CCS862002R0135		0.49	1
	16	209711	S802S-B16-R	2CCS862002R0165		0.49	1
	20	209728	S802S-B20-R	2CCS862002R0205		0.49	1
	25	209735	S802S-B25-R	2CCS862002R0255		0.49	1
	32	209742	S802S-B32-R	2CCS862002R0325		0.49	1
	40	206888	S802S-B40-R	2CCS862002R0405		0.49	1
	50	206895	S802S-B50-R	2CCS862002R0505		0.49	1
	63	206901	S802S-B63-R	2CCS862002R0635		0.49	1

High performance MCBs

S800S series with ring terminal connection, B characteristic

S803S

S804S

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	6	408282	S803S-B6-R	2CCS863002R0065		0.735	1
	8	411503	S803S-B8-R	2CCS863002R0085		0.735	1
	10	209759	S803S-B10-R	2CCS863002R0105		0.735	1
	13	209766	S803S-B13-R	2CCS863002R0135		0.735	1
	16	209773	S803S-B16-R	2CCS863002R0165		0.735	1
	20	209780	S803S-B20-R	2CCS863002R0205		0.735	1
	25	209797	S803S-B25-R	2CCS863002R0255		0.735	1
	32	209803	S803S-B32-R	2CCS863002R0325		0.735	1
	40	206949	S803S-B40-R	2CCS863002R0405		0.735	1
	50	206956	S803S-B50-R	2CCS863002R0505		0.735	1
	63	206963	S803S-B63-R	2CCS863002R0635		0.735	1
4	6	408299	S804S-B6-R	2CCS864002R0065		0.98	1
	8	411510	S804S-B8-R	2CCS864002R0085		0.98	1
	10	209810	S804S-B10-R	2CCS864002R0105		0.98	1
	13	209827	S804S-B13-R	2CCS864002R0135		0.98	1
	16	209834	S804S-B16-R	2CCS864002R0165		0.98	1
	20	209841	S804S-B20-R	2CCS864002R0205		0.98	1
	25	209858	S804S-B25-R	2CCS864002R0255		0.98	1
	32	209865	S804S-B32-R	2CCS864002R0325		0.98	1
	40	207007	S804S-B40-R	2CCS864002R0405		0.98	1
	50	207014	S804S-B50-R	2CCS864002R0505		0.98	1
	63	207021	S804S-B63-R	2CCS864002R0635		0.98	1

High performance MCBs

S800S series with cage terminal, C characteristic

S801S

S802S

S800S-C characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for resistive and inductive loads with low in-rush current; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60898, IEC/EN 60947-2, UL 1077, supplementary protector

Icn=25kA

Icu=50kA

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	0.5	499150	S801S-C0,5	2CCF019849R0001	0.24	1
	1	499167	S801S-C1	2CCF019850R0001	0.24	1
	1.6	499174	S801S-C1,6	2CCF019851R0001	0.24	1
	2	499181	S801S-C2	2CCF019852R0001	0.24	1
	2.5	499198	S801S-C2,5	2CCF019853R0001	0.24	1
	3	499204	S801S-C3	2CCF019854R0001	0.24	1
	4	499211	S801S-C4	2CCF019855R0001	0.24	1
	5	499228	S801S-C5	2CCF019856R0001	0.24	1
	6	408145	S801S-C6	2CCS861001R0064	0.24	1
	8	411367	S801S-C8	2CCS861001R0084	0.24	1
	10	200480	S801S-C10	2CCS861001R0104	0.24	1
	13	200497	S801S-C13	2CCS861001R0134	0.24	1
	16	200503	S801S-C16	2CCS861001R0164	0.24	1
	20	200510	S801S-C20	2CCS861001R0204	0.24	1
	25	200527	S801S-C25	2CCS861001R0254	0.24	1
	32	200534	S801S-C32	2CCS861001R0324	0.24	1
	40	200541	S801S-C40	2CCS861001R0404	0.24	1
	50	200558	S801S-C50	2CCS861001R0504	0.24	1
	63	200565	S801S-C63	2CCS861001R0634	0.24	1
2	0.5	499396	S802S-C0,5	2CCF019873R0001	0.49	1
	1	499402	S802S-C1	2CCF019874R0001	0.49	1
	1.6	499419	S802S-C1,6	2CCF019875R0001	0.49	1
	2	499426	S802S-C2	2CCF019876R0001	0.49	1
	2.5	499433	S802S-C2,5	2CCF019877R0001	0.49	1
	3	499440	S802S-C3	2CCF019878R0001	0.49	1
	4	499457	S802S-C4	2CCF019879R0001	0.49	1
	5	499464	S802S-C5	2CCF019880R0001	0.49	1
	6	408152	S802S-C6	2CCS862001R0064	0.49	1
	8	411374	S802S-C8	2CCS862001R0084	0.49	1
	10	200602	S802S-C10	2CCS862001R0104	0.49	1
	13	200619	S802S-C13	2CCS862001R0134	0.49	1
	16	200626	S802S-C16	2CCS862001R0164	0.49	1
	20	200633	S802S-C20	2CCS862001R0204	0.49	1
	25	200640	S802S-C25	2CCS862001R0254	0.49	1
	32	200657	S802S-C32	2CCS862001R0324	0.49	1
	40	200664	S802S-C40	2CCS862001R0404	0.49	1
	50	200671	S802S-C50	2CCS862001R0504	0.49	1
	63	200688	S802S-C63	2CCS862001R0634	0.49	1

High performance MCBs

S800S series with cage terminal, C characteristic

803S

S804S

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
3	0.5	499631	S803S-C0,5	2CCF019897R0001	0.74	1
	1	499648	S803S-C1	2CCF019898R0001	0.74	1
	1.6	499655	S803S-C1,6	2CCF019899R0001	0.74	1
	2	499662	S803S-C2	2CCF019900R0001	0.74	1
	2.5	499679	S803S-C2,5	2CCF019901R0001	0.74	1
	3	499686	S803S-C3	2CCF019902R0001	0.74	1
	4	499693	S803S-C4	2CCF019903R0001	0.74	1
	5	499709	S803S-C5	2CCF019904R0001	0.74	1
	6	408169	S803S-C6	2CCS863001R0064	0.74	1
	8	411381	S803S-C8	2CCS863001R0084	0.74	1
	10	200725	S803S-C10	2CCS863001R0104	0.74	1
	13	200732	S803S-C13	2CCS863001R0134	0.74	1
	16	200749	S803S-C16	2CCS863001R0164	0.74	1
	20	200756	S803S-C20	2CCS863001R0204	0.74	1
	25	200763	S803S-C25	2CCS863001R0254	0.74	1
	32	200770	S803S-C32	2CCS863001R0324	0.74	1
	40	200787	S803S-C40	2CCS863001R0404	0.74	1
	50	200794	S803S-C50	2CCS863001R0504	0.74	1
	63	200800	S803S-C63	2CCS863001R0634	0.74	1
4	0.5	499877	S804S-C0,5	2CCF019921R0001	0.98	1
	1	499884	S804S-C1	2CCF019922R0001	0.98	1
	1.6	499891	S804S-C1,6	2CCF019923R0001	0.98	1
	2	499907	S804S-C2	2CCF019924R0001	0.98	1
	2.5	499914	S804S-C2,5	2CCF019925R0001	0.98	1
	3	499921	S804S-C3	2CCF019926R0001	0.98	1
	4	499938	S804S-C4	2CCF019927R0001	0.98	1
	5	499945	S804S-C5	2CCF019928R0001	0.98	1
	6	408176	S804S-C6	2CCS864001R0064	0.98	1
	8	411398	S804S-C8	2CCS864001R0084	0.98	1
	10	200848	S804S-C10	2CCS864001R0104	0.98	1
	13	200855	S804S-C13	2CCS864001R0134	0.98	1
	16	200862	S804S-C16	2CCS864001R0164	0.98	1
	20	200879	S804S-C20	2CCS864001R0204	0.98	1
	25	200886	S804S-C25	2CCS864001R0254	0.98	1
	32	200893	S804S-C32	2CCS864001R0324	0.98	1
	40	200909	S804S-C40	2CCS864001R0404	0.98	1
	50	200916	S804S-C50	2CCS864001R0504	0.98	1
	63	200923	S804S-C63	2CCS864001R0634	0.98	1

High performance MCBs

S800S series with ring terminal connection, C characteristic

S801S

S802S

S800S-C characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for resistive and inductive loads with low in-rush current; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60947-2, IEC/EN 60898

Icn=25kA

Icu=50kA

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	6	408305	S801S-C6-R	2CCS861002R0064		0.245	1
	8	411527	S801S-C8-R	2CCS861002R0084		0.245	1
	10	209872	S801S-C10-R	2CCS861002R0104		0.245	1
	13	209889	S801S-C13-R	2CCS861002R0134		0.245	1
	16	209896	S801S-C16-R	2CCS861002R0164		0.245	1
	20	209902	S801S-C20-R	2CCS861002R0204		0.245	1
	25	209919	S801S-C25-R	2CCS861002R0254		0.245	1
	32	209926	S801S-C32-R	2CCS861002R0324		0.245	1
	40	207069	S801S-C40-R	2CCS861002R0404		0.245	1
	50	207076	S801S-C50-R	2CCS861002R0504		0.245	1
	63	207083	S801S-C63-R	2CCS861002R0634		0.245	1
2	6	408312	S802S-C6-R	2CCS862002R0064		0.49	1
	8	411534	S802S-C8-R	2CCS862001R0084		0.49	1
	10	209933	S802S-C10-R	2CCS862002R0104		0.49	1
	13	209940	S802S-C13-R	2CCS862002R0134		0.49	1
	16	209957	S802S-C16-R	2CCS862002R0164		0.49	1
	20	209964	S802S-C20-R	2CCS862002R0204		0.49	1
	25	209971	S802S-C25-R	2CCS862002R0254		0.49	1
	32	209988	S802S-C32-R	2CCS862002R0324		0.49	1
	40	207120	S802S-C40-R	2CCS862002R0404		0.49	1
	50	207137	S802S-C50-R	2CCS862002R0504		0.49	1
	63	207144	S802S-C63-R	2CCS862002R0634		0.49	1

High performance MCBs

S800S series with ring terminal connection, C characteristic

S803S

S804S

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	6	408329	S803S-C6-R	2CCS863002R0064		0.735	1
	8	411541	S803S-C8-R	2CCS863002R0084		0.735	1
	10	209995	S803S-C10-R	2CCS863002R0104		0.735	1
	13	210007	S803S-C13-R	2CCS863002R0134		0.735	1
	16	210014	S803S-C16-R	2CCS863002R0164		0.735	1
	20	210021	S803S-C20-R	2CCS863002R0204		0.735	1
	25	210038	S803S-C25-R	2CCS863002R0254		0.735	1
	32	210045	S803S-C32-R	2CCS863002R0324		0.735	1
	40	207182	S803S-C40-R	2CCS863002R0404		0.735	1
	50	207199	S803S-C50-R	2CCS863002R0504		0.735	1
	63	207205	S803S-C63-R	2CCS863002R0634		0.735	1
4	6	408336	S804S-C6-R	2CCS864002R0064		0.98	1
	8	411558	S804S-C8-R	2CCS864002R0084		0.98	1
	10	210052	S804S-C10-R	2CCS864002R0104		0.98	1
	13	210069	S804S-C13-R	2CCS864002R0134		0.98	1
	16	210076	S804S-C16-R	2CCS864002R0164		0.98	1
	20	210083	S804S-C20-R	2CCS864002R0204		0.98	1
	25	210090	S804S-C25-R	2CCS864002R0254		0.98	1
	32	210106	S804S-C32-R	2CCS864002R0324		0.98	1
	40	207243	S804S-C40-R	2CCS864002R0404		0.98	1
	50	207250	S804S-C50-R	2CCS864002R0504		0.98	1
	63	207267	S804S-C63-R	2CCS864002R0634		0.98	1

High performance MCBs

S800S series with cage terminal, D characteristic

S800S-D characteristic
Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for circuits which supply loads with high in-rush current at the circuit closing (motors, LV / LV transformers, breakdown lamps); very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.
Applications: commercial and industrial.
Standard: IEC/EN 60898, IEC/EN 60947-2, UL 1077, supplementary protector
Icn=25kA
Icu=50kA

S801S

S802S

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	0.5	499235	S801S-D0,5	2CCF019857R0001	0.24	1
	1	499242	S801S-D1	2CCF019858R0001	0.24	1
	1.6	499259	S801S-D1,6	2CCF019859R0001	0.24	1
	2	499266	S801S-D2	2CCF019860R0001	0.24	1
	2.5	499273	S801S-D2,5	2CCF019861R0001	0.24	1
	3	499280	S801S-D3	2CCF019862R0001	0.24	1
	4	499297	S801S-D4	2CCF019863R0001	0.24	1
	5	499303	S801S-D5	2CCF019864R0001	0.24	1
	6	408183	S801S-D6	2CCS861001R0061	0.24	1
	8	411404	S801S-D8	2CCS861001R0081	0.24	1
	10	200961	S801S-D10	2CCS861001R0101	0.24	1
	13	200978	S801S-D13	2CCS861001R0131	0.24	1
	16	200985	S801S-D16	2CCS861001R0161	0.24	1
	20	200992	S801S-D20	2CCS861001R0201	0.24	1
	25	201005	S801S-D25	2CCS861001R0251	0.24	1
	32	201012	S801S-D32	2CCS861001R0321	0.24	1
	40	201029	S801S-D40	2CCS861001R0401	0.24	1
	50	201036	S801S-D50	2CCS861001R0501	0.24	1
	63	201043	S801S-D63	2CCS861001R0631	0.24	1
2	0.5	499471	S802S-D0,5	2CCF019881R0001	0.49	1
	1	499488	S802S-D1	2CCF019882R0001	0.49	1
	1.6	499495	S802S-D1,6	2CCF019883R0001	0.49	1
	2	499501	S802S-D2	2CCF019884R0001	0.49	1
	2.5	499518	S802S-D2,5	2CCF019885R0001	0.49	1
	3	499525	S802S-D3	2CCF019886R0001	0.49	1
	4	499532	S802S-D4	2CCF019887R0001	0.49	1
	5	499549	S802S-D5	2CCF019888R0001	0.49	1
	6	408190	S802S-D6	2CCS862001R0061	0.49	1
	8	411411	S802S-D8	2CCS862001R0081	0.49	1
	10	201081	S802S-D10	2CCS862001R0101	0.49	1
	13	201098	S802S-D13	2CCS862001R0131	0.49	1
	16	201104	S802S-D16	2CCS862001R0161	0.49	1
	20	201111	S802S-D20	2CCS862001R0201	0.49	1
	25	201128	S802S-D25	2CCS862001R0251	0.49	1
	32	201135	S802S-D32	2CCS862001R0321	0.49	1
	40	201142	S802S-D40	2CCS862001R0401	0.49	1
	50	201159	S802S-D50	2CCS862001R0501	0.49	1
	63	201166	S802S-D63	2CCS862001R0631	0.49	1

High performance MCBs

S800S series with cage terminal, D characteristic

S803S

S804S

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
3	0.5	499716	S803S-D0,5	2CCF019905R0001	0.74	1
	1	499723	S803S-D1	2CCF019906R0001	0.74	1
	1.6	499730	S803S-D1,6	2CCF019907R0001	0.74	1
	2	499747	S803S-D2	2CCF019908R0001	0.74	1
	2.5	499754	S803S-D2,5	2CCF019909R0001	0.74	1
	3	499761	S803S-D3	2CCF019910R0001	0.74	1
	4	499778	S803S-D4	2CCF019911R0001	0.74	1
	5	499785	S803S-D5	2CCF019912R0001	0.74	1
	6	408206	S803S-D6	2CCS863001R0061	0.74	1
	8	411428	S803S-D8	2CCS863001R0081	0.74	1
	10	201203	S803S-D10	2CCS863001R0101	0.74	1
	13	201210	S803S-D13	2CCS863001R0131	0.74	1
	16	201227	S803S-D16	2CCS863001R0161	0.74	1
	20	201234	S803S-D20	2CCS863001R0201	0.74	1
	25	201241	S803S-D25	2CCS863001R0251	0.74	1
	32	201258	S803S-D32	2CCS863001R0321	0.74	1
	40	201265	S803S-D40	2CCS863001R0401	0.74	1
	50	201272	S803S-D50	2CCS863001R0501	0.74	1
	63	201289	S803S-D63	2CCS863001R0631	0.74	1
4	0.5	499952	S804S-D0,5	2CCF019929R0001	0.98	1
	1	499969	S804S-D1	2CCF019930R0001	0.98	1
	1.6	499976	S804S-D1,6	2CCF019931R0001	0.98	1
	2	499983	S804S-D2	2CCF019932R0001	0.98	1
	2.5	499990	S804S-D2,5	2CCF019933R0001	0.98	1
	3	500009	S804S-D3	2CCF019934R0001	0.98	1
	4	500016	S804S-D4	2CCF019935R0001	0.98	1
	5	500023	S804S-D5	2CCF019936R0001	0.98	1
	6	408213	S804S-D6	2CCS864001R0061	0.98	1
	8	411435	S804S-D8	2CCS864001R0081	0.98	1
	10	201326	S804S-D10	2CCS864001R0101	0.98	1
	13	201333	S804S-D13	2CCS864001R0131	0.98	1
	16	201340	S804S-D16	2CCS864001R0161	0.98	1
	20	201357	S804S-D20	2CCS864001R0201	0.98	1
	25	201364	S804S-D25	2CCS864001R0251	0.98	1
	32	201371	S804S-D32	2CCS864001R0321	0.98	1
	40	201388	S804S-D40	2CCS864001R0401	0.98	1
	50	201395	S804S-D50	2CCS864001R0501	0.98	1
	63	201401	S804S-D63	2CCS864001R0631	0.98	1

High performance MCBs

S800S series with ring terminal connection, D characteristic

S801S

S802S

S800S-D characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for circuits which supply loads with high in-rush current at the circuit closing (motors, LV / LV transformers, breakdown lamps); very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60947-2, IEC/EN 60898

Icn=25kA

Icu=50kA

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	6	408343	S801S-D6-R	2CCS861002R0061		0.245	1
	8	411565	S801S-D8-R	2CCS861002R0081		0.245	1
	10	210113	S801S-D10-R	2CCS861002R0101		0.245	1
	13	210120	S801S-D13-R	2CCS861002R0131		0.245	1
	16	210137	S801S-D16-R	2CCS861002R0161		0.245	1
	20	210144	S801S-D20-R	2CCS861002R0201		0.245	1
	25	210151	S801S-D25-R	2CCS861002R0251		0.245	1
	32	210168	S801S-D32-R	2CCS861002R0321		0.245	1
	40	207304	S801S-D40-R	2CCS861002R0401		0.245	1
	50	207311	S801S-D50-R	2CCS861002R0501		0.245	1
	63	207328	S801S-D63-R	2CCS861002R0631		0.245	1
2	6	408350	S802S-D6-R	2CCS862002R0061		0.49	1
	8	411572	S802S-D8-R	2CCS862002R0081		0.49	1
	10	210175	S802S-D10-R	2CCS862002R0101		0.49	1
	13	210182	S802S-D13-R	2CCS862002R0131		0.49	1
	16	210199	S802S-D16-R	2CCS862002R0161		0.49	1
	20	210205	S802S-D20-R	2CCS862002R0201		0.49	1
	25	210212	S802S-D25-R	2CCS862002R0251		0.49	1
	32	210229	S802S-D32-R	2CCS862002R0321		0.49	1
	40	207366	S802S-D40-R	2CCS862002R0401		0.49	1
	50	207373	S802S-D50-R	2CCS862002R0501		0.49	1
	63	207380	S802S-D63-R	2CCS862002R0631		0.49	1

High performance MCBs

S800S series with ring terminal connection, D characteristic

S803S

S804S

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	6	408367	S803S-D6-R	2CCS863002R0061		0.735	1
	8	411589	S803S-D8-R	2CCS863002R0081		0.735	1
	10	210236	S803S-D10-R	2CCS863002R0101		0.735	1
	13	210243	S803S-D13-R	2CCS863002R0131		0.735	1
	16	210250	S803S-D16-R	2CCS863002R0161		0.735	1
	20	210267	S803S-D20-R	2CCS863002R0201		0.735	1
	25	210274	S803S-D25-R	2CCS863002R0251		0.735	1
	32	210281	S803S-D32-R	2CCS863002R0321		0.735	1
	40	207427	S803S-D40-R	2CCS863002R0401		0.735	1
	50	207434	S803S-D50-R	2CCS863002R0501		0.735	1
	63	207441	S803S-D63-R	2CCS863002R0631		0.735	1
4	6	408374	S804S-D6-R	2CCS864002R0061		0.98	1
	8	411596	S804S-D8-R	2CCS864002R0081		0.98	1
	10	210298	S804S-D10-R	2CCS864002R0101		0.98	1
	13	210304	S804S-D13-R	2CCS864002R0131		0.98	1
	16	210311	S804S-D16-R	2CCS864002R0161		0.98	1
	20	210328	S804S-D20-R	2CCS864002R0201		0.98	1
	25	210335	S804S-D25-R	2CCS864002R0251		0.98	1
	32	210342	S804S-D32-R	2CCS864002R0321		0.98	1
	40	207489	S804S-D40-R	2CCS864002R0401		0.98	1
	50	207496	S804S-D50-R	2CCS864002R0501		0.98	1
	63	207502	S804S-D63-R	2CCS864002R0631		0.98	1

High performance MCBs

S800S series with cage terminal, K characteristic

S800S-K characteristic
Function: protection and control of the circuits like motors, transformer and auxiliary circuits, against overloads and short-circuits when a high breaking capacity is required; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.
Advantages: no nuisance tripping in the case of functional peak currents up to 10xIn, depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2, UL 1077, supplementary protector
Icu=50kA

S801S

S802S

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	0.5	500030	S801S-K0,5	2CCF019937R0001	0.24	1
	1	500047	S801S-K1	2CCF019938R0001	0.24	1
	1.6	500054	S801S-K1,6	2CCF019939R0001	0.24	1
	2	500061	S801S-K2	2CCF019940R0001	0.24	1
	2.5	500078	S801S-K2,5	2CCF019941R0001	0.24	1
	3	500085	S801S-K3	2CCF019942R0001	0.24	1
	4	500092	S801S-K4	2CCF019943R0001	0.24	1
	5	500108	S801S-K5	2CCF019944R0001	0.24	1
	6	408220	S801S-K6	2CCS861001R0067	0.24	1
	8	411442	S801S-K8	2CCS861001R0407	0.24	1
	10	201449	S801S-K10	2CCS861001R0427	0.24	1
	13	201456	S801S-K13	2CCS861001R0447	0.24	1
	16	201463	S801S-K16	2CCS861001R0467	0.24	1
	20	201470	S801S-K20	2CCS861001R0487	0.24	1
	25	201487	S801S-K25	2CCS861001R0517	0.24	1
	32	201494	S801S-K32	2CCS861001R0537	0.24	1
	40	201500	S801S-K40	2CCS861001R0557	0.24	1
	50	201517	S801S-K50	2CCS861001R0577	0.24	1
	63	201524	S801S-K63	2CCS861001R0597	0.24	1
2	0.5	500115	S802S-K0,5	2CCF019945R0001	0.49	1
	1	500122	S802S-K1	2CCF019946R0001	0.49	1
	1.6	500139	S802S-K1,6	2CCF019947R0001	0.49	1
	2	500146	S802S-K2	2CCF019948R0001	0.49	1
	2.5	500153	S802S-K2,5	2CCF019949R0001	0.49	1
	3	500160	S802S-K3	2CCF019950R0001	0.49	1
	4	500177	S802S-K4	2CCF019951R0001	0.49	1
	5	500184	S802S-K5	2CCF019952R0001	0.49	1
	6	408237	S802S-K6	2CCS862001R0067	0.49	1
	8	411459	S802S-K8	2CCS862001R0407	0.49	1
	10	201562	S802S-K10	2CCS862001R0427	0.49	1
	13	201579	S802S-K13	2CCS862001R0447	0.49	1
	16	201586	S802S-K16	2CCS862001R0467	0.49	1
	20	201593	S802S-K20	2CCS862001R0487	0.49	1
	25	201609	S802S-K25	2CCS862001R0517	0.49	1
	32	201616	S802S-K32	2CCS862001R0537	0.49	1
	40	201623	S802S-K40	2CCS862001R0557	0.49	1
	50	201630	S802S-K50	2CCS862001R0577	0.49	1
	63	201647	S802S-K63	2CCS862001R0597	0.49	1

High performance MCBs

S800S series with cage terminal, K characteristic

S803S

S804S

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
3	0.5	500191	S803S-K0,5	2CCF019953R0001	0.74	1
	1	500207	S803S-K1	2CCF019954R0001	0.74	1
	1.6	500214	S803S-K1,6	2CCF019955R0001	0.74	1
	2	500221	S803S-K2	2CCF019956R0001	0.74	1
	2.5	500238	S803S-K2,5	2CCF019957R0001	0.74	1
	3	500245	S803S-K3	2CCF019958R0001	0.74	1
	4	500252	S803S-K4	2CCF019959R0001	0.74	1
	5	500269	S803S-K5	2CCF019960R0001	0.74	1
	6	408244	S803S-K6	2CCS863001R0067	0.74	1
	8	411466	S803S-K8	2CCS863001R0407	0.74	1
	10	201685	S803S-K10	2CCS863001R0427	0.74	1
	13	201692	S803S-K13	2CCS863001R0447	0.74	1
	16	201708	S803S-K16	2CCS863001R0467	0.74	1
	20	201715	S803S-K20	2CCS863001R0487	0.74	1
	25	201722	S803S-K25	2CCS863001R0517	0.74	1
	32	201739	S803S-K32	2CCS863001R0537	0.74	1
	40	201746	S803S-K40	2CCS863001R0557	0.74	1
	50	201753	S803S-K50	2CCS863001R0577	0.74	1
	63	201760	aS803S-K63	2CCS863001R0597	0.74	1
4	0.5	500276	S804S-K0,5	2CCF019961R0001	0.98	1
	1	500283	S804S-K1	2CCF019962R0001	0.98	1
	1.6	500290	S804S-K1,6	2CCF019963R0001	0.98	1
	2	500306	S804S-K2	2CCF019964R0001	0.98	1
	2.5	500313	S804S-K2,5	2CCF019965R0001	0.98	1
	3	500320	S804S-K3	2CCF019966R0001	0.98	1
	4	500337	S804S-K4	2CCF019967R0001	0.98	1
	5	500344	S804S-K5	2CCF019968R0001	0.98	1
	6	408251	S804S-K6	2CCS864001R0067	0.98	1
	8	411473	S804S-K8	2CCS864001R0407	0.98	1
	10	201807	S804S-K10	2CCS864001R0427	0.98	1
	13	201814	S804S-K13	2CCS864001R0447	0.98	1
	16	201821	S804S-K16	2CCS864001R0467	0.98	1
	20	201838	S804S-K20	2CCS864001R0487	0.98	1
	25	201845	S804S-K25	2CCS864001R0517	0.98	1
	32	201852	S804S-K32	2CCS864001R0537	0.98	1
	40	201869	S804S-K40	2CCS864001R0557	0.98	1
	50	201876	S804S-K50	2CCS864001R0577	0.98	1
	63	201883	S804S-K63	2CCS864001R0597	0.98	1

High performance MCBs

S800S series with ring terminal connection, K characteristic

S800S-K characteristic
Function: protection and control of the circuits like motors, transformer and auxiliary circuits, against overloads and short-circuits when a high breaking capacity is required; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.
Advantages: no nuisance tripping in the case of functional peak currents up to 10xIn, depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2
Icu=50kA

S801S

S802S

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	6	408381	S801S-K6-R	2CCS861002R0067		0.245	1
	8	411602	S801S-K8-R	2CCS861002R0407		0.245	1
	10	209391	S801S-K10-R	2CCS861002R0427		0.245	1
	13	209407	S801S-K13-R	2CCS861002R0447		0.245	1
	16	209414	S801S-K16-R	2CCS861002R0467		0.245	1
	20	209421	S801S-K20-R	2CCS861002R0487		0.245	1
	25	209438	S801S-K25-R	2CCS861002R0517		0.245	1
	32	209445	S801S-K32-R	2CCS861002R0537		0.245	1
	40	207540	S801S-K40-R	2CCS861002R0557		0.245	1
	50	207557	S801S-K50-R	2CCS861002R0577		0.245	1
	63	207564	S801S-K63-R	2CCS861002R0597		0.245	1
2	6	408398	S802S-K6-R	2CCS862002R0067		0.49	1
	8	411619	S802S-K8-R	2CCS862002R0407		0.49	1
	10	209452	S802S-K10-R	2CCS862002R0427		0.49	1
	13	209469	S802S-K13-R	2CCS862002R0447		0.49	1
	16	209476	S802S-K16-R	2CCS862002R0467		0.49	1
	20	209483	S802S-K20-R	2CCS862002R0487		0.49	1
	25	209490	S802S-K25-R	2CCS862002R0517		0.49	1
	32	209506	S802S-K32-R	2CCS862002R0537		0.49	1
	40	207601	S802S-K40-R	2CCS862002R0557		0.49	1
	50	207618	S802S-K50-R	2CCS862002R0577		0.49	1
	63	207625	S802S-K63-R	2CCS862002R0597		0.49	1

High performance MCBs

S800S series with ring terminal connection, K characteristic

S803S

S804S

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	6	408404	S803S-K6-R	2CCS863002R0067		0.735	1
	8	411626	S803S-K8-R	2CCS863002R0407		0.735	1
	10	209513	S803S-K10-R	2CCS863002R0427		0.735	1
	13	209520	S803S-K13-R	2CCS863002R0447		0.735	1
	16	209537	S803S-K16-R	2CCS863002R0467		0.735	1
	20	209544	S803S-K20-R	2CCS863002R0487		0.735	1
	25	209551	S803S-K25-R	2CCS863002R0517		0.735	1
	32	209568	S803S-K32-R	2CCS863002R0537		0.735	1
	40	207663	S803S-K40-R	2CCS863002R0557		0.735	1
	50	207670	S803S-K50-R	2CCS863002R0577		0.735	1
	63	207687	S803S-K63-R	2CCS863002R0597		0.735	1
4	6	408411	S804S-K6-R	2CCS864002R0067		0.98	1
	8	411633	S804S-K8-R	2CCS864002R0407		0.98	1
	10	209575	S804S-K10-R	2CCS864002R0427		0.98	1
	13	209582	S804S-K13-R	2CCS864002R0447		0.98	1
	16	209599	S804S-K16-R	2CCS864002R0467		0.98	1
	20	209605	S804S-K20-R	2CCS864002R0487		0.98	1
	25	209612	S804S-K25-R	2CCS864002R0517		0.98	1
	32	209629	S804S-K32-R	2CCS864002R0537		0.98	1
	40	207724	S804S-K40-R	2CCS864002R0557		0.98	1
	50	207731	S804S-K50-R	2CCS864002R0577		0.98	1
	63	207748	S804S-K63-R	2CCS864002R0597		0.98	1

High performance MCBs

S800S series KM characteristic

S803S

S800S-KM characteristic with cage terminal

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; only magnetic version dedicated to protect motors; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream; version dedicated to application in direct current circuits.

Applications: industrial, motor protection.

Standard: IEC/EN 60947-2

Icu=50kA

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
3	10	441104	S803S-KM10	2CCF019559R0001	0.735	1
	16	441111	S803S-KM16	2CCF019560R0001	0.735	1
	20	202194	S803S-KM20	2CCS863001R0486	0.74	1
	25	202200	S803S-KM25	2CCS863001R0516	0.74	1
	32	202217	S803S-KM32	2CCS863001R0536	0.74	1
	40	202224	S803S-KM40	2CCS863001R0556	0.74	1
	50	202231	S803S-KM50	2CCS863001R0576	0.74	1
	63	202248	S803S-KM63	2CCS863001R0596	0.74	1
	80	202255	S803S-KM80	2CCS863001R0626	0.74	1

*M stands for magnetic tripping only

S803S

S800S-KM-R characteristic with ring terminal connection

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; only magnetic version dedicated to protect motors; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream; version dedicated to application in direct current circuits.

Applications: industrial, motor protection.

Standard: IEC/EN 60947-2

Icu=50kA

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	20	210830	S803S-KM20-R	2CCS863002R0486		0.735	1
	25	210847	S803S-KM25-R	2CCS863002R0516		0.735	1
	32	210854	S803S-KM32-R	2CCS863002R0536		0.735	1
	40	207786	S803S-KM40-R	2CCS863002R0556		0.735	1
	50	207793	S803S-KM50-R	2CCS863002R0576		0.735	1
	63	207809	S803S-KM63-R	2CCS863002R0596		0.735	1
	80	207816	S803S-KM80-R	2CCS863002R0626		0.735	1

High performance MCBs

S800N series with cage terminal, B characteristic

S800N-B characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60898, IEC/EN 60947-2

Icn=20 kA

Icu=36 kA

S801N

S802N

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	6	408428	S801N-B6	2CCS891001R0065	0.24	1
	8	411640	S801N-B8	2CCS891001R0085	0.24	1
	10	203801	S801N-B10	2CCS891001R0105	0.24	1
	13	203818	S801N-B13	2CCS891001R0135	0.24	1
	16	203825	S801N-B16	2CCS891001R0165	0.24	1
	20	203832	S801N-B20	2CCS891001R0205	0.24	1
	25	203849	S801N-B25	2CCS891001R0255	0.24	1
	32	203856	S801N-B32	2CCS891001R0325	0.24	1
	40	203863	S801N-B40	2CCS891001R0405	0.24	1
	50	203870	S801N-B50	2CCS891001R0505	0.24	1
	63	203887	S801N-B63	2CCS891001R0635	0.24	1
2	6	408435	S802N-B6	2CCS892001R0065	0.48	1
	8	411657	S802N-B8	2CCS892001R0085	0.48	1
	10	203924	S802N-B10	2CCS892001R0105	0.48	1
	13	203931	S802N-B13	2CCS892001R0135	0.48	1
	16	203948	S802N-B16	2CCS892001R0165	0.48	1
	20	203955	S802N-B20	2CCS892001R0205	0.48	1
	25	203962	S802N-B25	2CCS892001R0255	0.48	1
	32	203979	S802N-B32	2CCS892001R0325	0.48	1
	40	203986	S802N-B40	2CCS892001R0405	0.48	1
	50	203993	S802N-B50	2CCS892001R0505	0.48	1
	63	204006	S802N-B63	2CCS892001R0635	0.48	1

High performance MCBs

S800N series with cage terminal, B characteristic

S803N

S804N

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
3	6	408442	S803N-B6	2CCS893001R0065	0.72	1
	8	411664	S803N-B8	2CCS893001R0085	0.72	1
	10	204044	S803N-B10	2CCS893001R0105	0.72	1
	13	204051	S803N-B13	2CCS893001R0135	0.72	1
	16	204068	S803N-B16	2CCS893001R0165	0.72	1
	20	204075	S803N-B20	2CCS893001R0205	0.72	1
	25	204082	S803N-B25	2CCS893001R0255	0.72	1
	32	204099	S803N-B32	2CCS893001R0325	0.72	1
	40	204105	S803N-B40	2CCS893001R0405	0.72	1
	50	204112	S803N-B50	2CCS893001R0505	0.72	1
	63	204129	S803N-B63	2CCS893001R0635	0.72	1
4	6	408459	S804N-B6	2CCS894001R0065	0.96	1
	8	411671	S804N-B8	2CCS894001R0085	0.96	1
	10	204167	S804N-B10	2CCS894001R0105	0.96	1
	13	204174	S804N-B13	2CCS894001R0135	0.96	1
	16	204181	S804N-B16	2CCS894001R0165	0.96	1
	20	204198	S804N-B20	2CCS894001R0205	0.96	1
	25	204204	S804N-B25	2CCS894001R0255	0.96	1
	32	204211	S804N-B32	2CCS894001R0325	0.96	1
	40	204228	S804N-B40	2CCS894001R0405	0.96	1
	50	204235	S804N-B50	2CCS894001R0505	0.96	1
	63	204242	S804N-B63	2CCS894001R0635	0.96	1

High performance MCBs

S800N series with cage terminal, C characteristic

S800N-C characteristic
Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for resistive and inductive loads with low in-rush current; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.
Applications: commercial and industrial.
Standard: IEC/EN 60898, IEC/EN 60947-2
Icn=20 kA
Icu=36 kA

S801N

S802N

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	6	408466	S801N-C6	2CCS891001R0064	0.24	1
	8	411688	S801N-C8	2CCS891001R0084	0.24	1
	10	204280	S801N-C10	2CCS891001R0104	0.24	1
	13	204297	S801N-C13	2CCS891001R0134	0.24	1
	16	204303	S801N-C16	2CCS891001R0164	0.24	1
	20	204310	S801N-C20	2CCS891001R0204	0.24	1
	25	204327	S801N-C25	2CCS891001R0254	0.24	1
	32	204334	S801N-C32	2CCS891001R0324	0.24	1
	40	204341	S801N-C40	2CCS891001R0404	0.24	1
	50	204358	S801N-C50	2CCS891001R0504	0.24	1
	63	204365	S801N-C63	2CCS891001R0634	0.24	1
2	6	408473	S802N-C6	2CCS892001R0064	0.48	1
	8	411695	S802N-C8	2CCS892001R0084	0.48	1
	10	204402	S802N-C10	2CCS892001R0104	0.48	1
	13	204419	S802N-C13	2CCS892001R0134	0.48	1
	16	204426	S802N-C16	2CCS892001R0164	0.48	1
	20	204433	S802N-C20	2CCS892001R0204	0.48	1
	25	204440	S802N-C25	2CCS892001R0254	0.48	1
	32	204457	S802N-C32	2CCS892001R0324	0.48	1
	40	204464	S802N-C40	2CCS892001R0404	0.48	1
	50	204471	S802N-C50	2CCS892001R0504	0.48	1
	63	204488	S802N-C63	2CCS892001R0634	0.48	1

High performance MCBs

S800N series with cage terminal, C characteristic

S803N

S804N

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
3	6	408480	S803N-C6	2CCS893001R0064	0.72	1
	8	411701	S803N-C8	2CCS893001R0084	0.72	1
	10	204525	S803N-C10	2CCS893001R0104	0.72	1
	13	204532	S803N-C13	2CCS893001R0134	0.72	1
	16	204549	S803N-C16	2CCS893001R0164	0.72	1
	20	204556	S803N-C20	2CCS893001R0204	0.72	1
	25	204563	S803N-C25	2CCS893001R0254	0.72	1
	32	204570	S803N-C32	2CCS893001R0324	0.72	1
	40	204587	S803N-C40	2CCS893001R0404	0.72	1
	50	204594	S803N-C50	2CCS893001R0504	0.72	1
	63	204600	S803N-C63	2CCS893001R0634	0.72	1
4	6	408497	S804N-C6	2CCS894001R0064	0.96	1
	8	411718	S804N-C8	2CCS894001R0084	0.96	1
	10	204648	S804N-C10	2CCS894001R0104	0.96	1
	13	204655	S804N-C13	2CCS894001R0134	0.96	1
	16	204662	S804N-C16	2CCS894001R0164	0.96	1
	20	204679	S804N-C20	2CCS894001R0204	0.96	1
	25	204686	S804N-C25	2CCS894001R0254	0.96	1
	32	204693	S804N-C32	2CCS894001R0324	0.96	1
	40	204709	S804N-C40	2CCS894001R0404	0.96	1
	50	204716	S804N-C50	2CCS894001R0504	0.96	1
	63	204723	S804N-C63	2CCS894001R0634	0.96	1

High performance MCBs

S800N series with cage terminal, D characteristic

S801N

S802N

S803N

S800N-D characteristic
Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for circuits which supply loads with high in-rush current at the circuit closing (motors, LV / LV transformers, breakdown lamps); very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.
Applications: commercial and industrial.
Standard: IEC/EN 60898, IEC/EN 60947-2
Icn=20 kA
Icu=36 kA

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	6	408503	S801N-D6	2CCS891001R0061	0.24	1
	8	411725	S801N-D8	2CCS891001R0081	0.24	1
	10	204761	S801N-D10	2CCS891001R0101	0.24	1
	13	204778	S801N-D13	2CCS891001R0131	0.24	1
	16	204785	S801N-D16	2CCS891001R0161	0.24	1
	20	204792	S801N-D20	2CCS891001R0201	0.24	1
	25	204808	S801N-D25	2CCS891001R0251	0.24	1
	32	204815	S801N-D32	2CCS891001R0321	0.24	1
	40	204822	S801N-D40	2CCS891001R0401	0.24	1
	50	204839	S801N-D50	2CCS891001R0501	0.24	1
	63	204846	S801N-D63	2CCS891001R0631	0.24	1
2	6	408510	S802N-D6	2CCS892001R0061	0.49	1
	8	411732	S802N-D8	2CCS892001R0081	0.49	1
	10	204884	S802N-D10	2CCS892001R0101	0.49	1
	13	204891	S802N-D13	2CCS892001R0131	0.49	1
	16	204907	S802N-D16	2CCS892001R0161	0.49	1
	20	204914	S802N-D20	2CCS892001R0201	0.49	1
	25	204921	S802N-D25	2CCS892001R0251	0.49	1
	32	204938	S802N-D32	2CCS892001R0321	0.49	1
	40	204945	S802N-D40	2CCS892001R0401	0.49	1
	50	204952	S802N-D50	2CCS892001R0501	0.49	1
	63	204969	S802N-D63	2CCS892001R0631	0.49	1
3	6	408527	S803N-D6	2CCS893001R0061	0.74	1
	8	411749	S803N-D8	2CCS893001R0081	0.74	1
	10	205003	S803N-D10	2CCS893001R0101	0.74	1
	13	205010	S803N-D13	2CCS893001R0131	0.74	1
	16	205027	S803N-D16	2CCS893001R0161	0.74	1
	20	205034	S803N-D20	2CCS893001R0201	0.74	1
	25	205041	S803N-D25	2CCS893001R0251	0.74	1
	32	205058	S803N-D32	2CCS893001R0321	0.74	1
	40	205065	S803N-D40	2CCS893001R0401	0.74	1
	50	205072	S803N-D50	2CCS893001R0501	0.74	1
	63	205089	S803N-D63	2CCS893001R0631	0.74	1

High performance MCBs

S800N series with cage terminal, D characteristic

S804N

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
4	6	408534	S804N-D6	2CCS894001R0061	0.98	1
	8	411756	S804N-D8	2CCS894001R0081	0.98	1
	10	205126	S804N-D10	2CCS894001R0101	0.98	1
	13	205133	S804N-D13	2CCS894001R0131	0.98	1
	16	205140	S804N-D16	2CCS894001R0161	0.98	1
	20	205157	S804N-D20	2CCS894001R0201	0.98	1
	25	205164	S804N-D25	2CCS894001R0251	0.98	1
	32	205171	S804N-D32	2CCS894001R0321	0.98	1
	40	205188	S804N-D40	2CCS894001R0401	0.98	1
	50	205195	S804N-D50	2CCS894001R0501	0.98	1
	63	205201	S804N-D63	2CCS894001R0631	0.98	1

High performance MCBs

S800C series with cage terminal, B characteristic

S800C-B characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60947-2, IEC/EN 60898, UL 1077, supplementary protector

Icn=15 kA

Icu=25 kA

S801C

S802C

S803C

S804C

Number of poles	Rated current [A]	GTIN EAN 76122712	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	10	12087	S801C-B10	2CCS881001R0105	0.25	1
	13	12247	S801C-B13	2CCS881001R0135	0.25	1
	16	12407	S801C-B16	2CCS881001R0165	0.25	1
	20	12568	S801C-B20	2CCS881001R0205	0.25	1
	25	12728	S801C-B25	2CCS881001R0255	0.25	1
	32	12889	S801C-B32	2CCS881001R0325	0.25	1
	40	13046	S801C-B40	2CCS881001R0405	0.25	1
	50	13206	S801C-B50	2CCS881001R0505	0.25	1
	63	13367	S801C-B63	2CCS881001R0635	0.25	1
2	10	12094	S802C-B10	2CCS882001R0105	0.49	1
	13	12254	S802C-B13	2CCS882001R0135	0.49	1
	16	12414	S802C-B16	2CCS882001R0165	0.49	1
	20	12575	S802C-B20	2CCS882001R0205	0.49	1
	25	12735	S802C-B25	2CCS882001R0255	0.49	1
	32	12896	S802C-B32	2CCS882001R0325	0.49	1
	40	13053	S802C-B40	2CCS882001R0405	0.49	1
	50	13213	S802C-B50	2CCS882001R0505	0.49	1
	63	13374	S802C-B63	2CCS882001R0635	0.49	1
3	10	12100	S803C-B10	2CCS883001R0105	0.74	1
	13	12261	S803C-B13	2CCS883001R0135	0.74	1
	16	12421	S803C-B16	2CCS883001R0165	0.74	1
	20	12582	S803C-B20	2CCS883001R0205	0.74	1
	25	12742	S803C-B25	2CCS883001R0255	0.74	1
	32	12902	S803C-B32	2CCS883001R0325	0.74	1
	40	13060	S803C-B40	2CCS883001R0405	0.74	1
	50	13220	S803C-B50	2CCS883001R0505	0.74	1
	63	13381	S803C-B63	2CCS883001R0635	0.74	1
4	10	12117	S804C-B10	2CCS884001R0105	0.98	1
	13	12278	S804C-B13	2CCS884001R0135	0.98	1
	16	12438	S804C-B16	2CCS884001R0165	0.98	1
	20	12599	S804C-B20	2CCS884001R0205	0.98	1
	25	12759	S804C-B25	2CCS884001R0255	0.98	1
	32	12919	S804C-B32	2CCS884001R0325	0.98	1
	40	13077	S804C-B40	2CCS884001R0405	0.98	1
	50	13237	S804C-B50	2CCS884001R0505	0.98	1
	63	13398	S804C-B63	2CCS884001R0635	0.98	1

High performance MCBs

S800C series with cage terminal, C characteristic

S801C

S802C

S803C

S804C

S800C-C characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60947-2, IEC/EN 60898, UL 1077, supplementary protector

Icn=15 kA

Icu=25 kA

Number of poles	Rated current [A]	GTIN EAN 76122712	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	10	12124	S801C-C10	2CCS881001R0104	0.25	1
	13	12285	S801C-C13	2CCS881001R0134	0.25	1
	16	12445	S801C-C16	2CCS881001R0164	0.25	1
	20	12605	S801C-C20	2CCS881001R0204	0.25	1
	25	12766	S801C-C25	2CCS881001R0254	0.25	1
	32	12926	S801C-C32	2CCS881001R0324	0.25	1
	40	13084	S801C-C40	2CCS881001R0404	0.25	1
	50	13244	S801C-C50	2CCS881001R0504	0.25	1
	63	13404	S801C-C63	2CCS881001R0634	0.25	1
2	10	12131	S802C-C10	2CCS882001R0104	0.49	1
	13	12292	S802C-C13	2CCS882001R0134	0.49	1
	16	12452	S802C-C16	2CCS882001R0164	0.49	1
	20	12612	S802C-C20	2CCS882001R0204	0.49	1
	25	12773	S802C-C25	2CCS882001R0254	0.49	1
	32	12933	S802C-C32	2CCS882001R0324	0.49	1
	40	13091	S802C-C40	2CCS882001R0404	0.49	1
	50	13251	S802C-C50	2CCS882001R0504	0.49	1
	63	13411	S802C-C63	2CCS882001R0634	0.49	1
3	10	12148	S803C-C10	2CCS883001R0104	0.74	1
	13	12308	S803C-C13	2CCS883001R0134	0.74	1
	16	12469	S803C-C16	2CCS883001R0164	0.74	1
	20	12629	S803C-C20	2CCS883001R0204	0.74	1
	25	12780	S803C-C25	2CCS883001R0254	0.74	1
	32	12940	S803C-C32	2CCS883001R0324	0.74	1
	40	13107	S803C-C40	2CCS883001R0404	0.74	1
	50	13268	S803C-C50	2CCS883001R0504	0.74	1
	63	13428	S803C-C63	2CCS883001R0634	0.74	1
4	10	12155	S804C-C10	2CCS884001R0104	0.98	1
	13	12315	S804C-C13	2CCS884001R0134	0.98	1
	16	12476	S804C-C16	2CCS884001R0164	0.98	1
	20	12636	S804C-C20	2CCS884001R0204	0.98	1
	25	12797	S804C-C25	2CCS884001R0254	0.98	1
	32	12957	S804C-C32	2CCS884001R0324	0.98	1
	40	13114	S804C-C40	2CCS884001R0404	0.98	1
	50	13275	S804C-C50	2CCS884001R0504	0.98	1
	63	13435	S804C-C63	2CCS884001R0634	0.98	1

High performance MCBs

S800C series with cage terminal, D characteristic

S801C

S802C

S803C

S804C

S800C-D characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60947-2, IEC/EN 60898, UL 1077, supplementary protector

Icn=15kA

Icu=25 kA

Number of poles	Rated current [A]	GTIN EAN 76122712	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	10	12162	S801C-D10	2CCS881001R0101	0.25	1
	13	12322	S801C-D13	2CCS881001R0131	0.25	1
	16	12483	S801C-D16	2CCS881001R0161	0.25	1
	20	12643	S801C-D20	2CCS881001R0201	0.25	1
	25	12803	S801C-D25	2CCS881001R0251	0.25	1
	32	12964	S801C-D32	2CCS881001R0321	0.25	1
	40	13121	S801C-D40	2CCS881001R0401	0.25	1
	50	13282	S801C-D50	2CCS881001R0501	0.25	1
	63	13442	S801C-D63	2CCS881001R0631	0.25	1
2	10	12179	S802C-D10	2CCS882001R0101	0.49	1
	13	12339	S802C-D13	2CCS882001R0131	0.49	1
	16	12490	S802C-D16	2CCS882001R0161	0.49	1
	20	12650	S802C-D20	2CCS882001R0201	0.49	1
	25	12810	S802C-D25	2CCS882001R0251	0.49	1
	32	12971	S802C-D32	2CCS882001R0321	0.49	1
	40	13138	S802C-D40	2CCS882001R0401	0.49	1
	50	13299	S802C-D50	2CCS882001R0501	0.49	1
	63	13459	S802C-D63	2CCS882001R0631	0.49	1
3	10	12186	S803C-D10	2CCS883001R0101	0.74	1
	13	12346	S803C-D13	2CCS883001R0131	0.74	1
	16	12506	S803C-D16	2CCS883001R0161	0.74	1
	20	12667	S803C-D20	2CCS883001R0201	0.74	1
	25	12827	S803C-D25	2CCS883001R0251	0.74	1
	32	12988	S803C-D32	2CCS883001R0321	0.74	1
	40	13145	S803C-D40	2CCS883001R0401	0.74	1
	50	13305	S803C-D50	2CCS883001R0501	0.74	1
	63	13466	S803C-D63	2CCS883001R0631	0.74	1
4	10	12193	S804C-D10	2CCS884001R0101	0.98	1
	13	12353	S804C-D13	2CCS884001R0131	0.98	1
	16	12513	S804C-D16	2CCS884001R0161	0.98	1
	20	12674	S804C-D20	2CCS884001R0201	0.98	1
	25	12834	S804C-D25	2CCS884001R0251	0.98	1
	32	12995	S804C-D32	2CCS884001R0321	0.98	1
	40	13152	S804C-D40	2CCS884001R0401	0.98	1
	50	13312	S804C-D50	2CCS884001R0501	0.98	1
	63	13473	S804C-D63	2CCS884001R0631	0.98	1

High performance MCBs

S800C series with cage terminal, K characteristic

S801C

S802C

S803C

S804C

S800C-K characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: IEC/EN 60947-2, UL 1077, supplementary protector

Icu=25 kA

Number of poles	Rated current [A]	GTIN EAN 76122712	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	10	12209	S801C-K10	2CCS881001R0427	0.25	1
	13	12360	S801C-K13	2CCS881001R0447	0.25	1
	16	12520	S801C-K16	2CCS881001R0467	0.25	1
	20	12681	S801C-K20	2CCS881001R0487	0.25	1
	25	12841	S801C-K25	2CCS881001R0517	0.25	1
	32	13008	S801C-K32	2CCS881001R0537	0.25	1
	40	13169	S801C-K40	2CCS881001R0557	0.25	1
	50	13329	S801C-K50	2CCS881001R0577	0.25	1
	63	13480	S801C-K63	2CCS881001R0597	0.25	1
2	10	12216	S802C-K10	2CCS882001R0427	0.49	1
	13	12377	S802C-K13	2CCS882001R0447	0.49	1
	16	12537	S802C-K16	2CCS882001R0467	0.49	1
	20	12698	S802C-K20	2CCS882001R0487	0.49	1
	25	12858	S802C-K25	2CCS882001R0517	0.49	1
	32	13015	S802C-K32	2CCS882001R0537	0.49	1
	40	13176	S802C-K40	2CCS882001R0557	0.49	1
	50	13336	S802C-K50	2CCS882001R0577	0.49	1
	63	13497	S802C-K63	2CCS882001R0597	0.49	1
3	10	12223	S803C-K10	2CCS883001R0427	0.74	1
	13	12384	S803C-K13	2CCS883001R0447	0.74	1
	16	12544	S803C-K16	2CCS883001R0467	0.74	1
	20	12704	S803C-K20	2CCS883001R0487	0.74	1
	25	12865	S803C-K25	2CCS883001R0517	0.74	1
	32	13022	S803C-K32	2CCS883001R0537	0.74	1
	40	13183	S803C-K40	2CCS883001R0557	0.74	1
	50	13343	S803C-K50	2CCS883001R0577	0.74	1
	63	13503	S803C-K63	2CCS883001R0597	0.74	1
4	10	12230	S804C-K10	2CCS884001R0427	0.98	1
	13	12391	S804C-K13	2CCS884001R0447	0.98	1
	16	12551	S804C-K16	2CCS884001R0467	0.98	1
	20	12711	S804C-K20	2CCS884001R0487	0.98	1
	25	12872	S804C-K25	2CCS884001R0517	0.98	1
	32	13039	S804C-K32	2CCS884001R0537	0.98	1
	40	13190	S804C-K40	2CCS884001R0557	0.98	1
	50	13350	S804C-K50	2CCS884001R0577	0.98	1
	63	13510	S804C-K63	2CCS884001R0597	0.98	1

High performance MCBs

S800B series with cage terminal, B characteristic

S800B-B characteristic

Function: protection and control of the circuits against overloads and short-circuits. With its lower breaking capacity it is designed to meet the needs of the sub-distributions.
For motor starter applications ABB recommends to use S800S, S800N or S800C.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2, EN 60898
Icn=10kA
Icu=16kA

S801B

S802B

S803B

S804B

Number of poles	Rated current [A]	GTIN EAN 76122714	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	32	15303	S801B-B32	2CCS811001R0325	0.24	1
	40	16539	S801B-B40	2CCS811001R0405	0.24	1
	50	16577	S801B-B50	2CCS811001R0505	0.24	1
	63	16614	S801B-B63	2CCS811001R0635	0.24	1
2	32	16508	S802B-B32	2CCS812001R0325	0.49	1
	40	16546	S802B-B40	2CCS812001R0405	0.49	1
	50	16584	S802B-B50	2CCS812001R0505	0.49	1
	63	16621	S802B-B63	2CCS812001R0635	0.49	1
3	32	16515	S803B-B32	2CCS813001R0325	0.74	1
	40	16553	S803B-B40	2CCS813001R0405	0.74	1
	50	16591	S803B-B50	2CCS813001R0505	0.74	1
	63	16638	S803B-B63	2CCS813001R0635	0.74	1
4	32	16522	S804B-B32	2CCS814001R0325	0.98	1
	40	16560	S804B-B40	2CCS814001R0405	0.98	1
	50	16607	S804B-B50	2CCS814001R0505	0.98	1
	63	16645	S804B-B63	2CCS814001R0635	0.98	1

High performance MCBs

S800B series with cage terminal, C characteristic

S800B-C characteristic

Function: protection and control of the circuits against overloads and short-circuits. With its lower breaking capacity it is designed to meet the needs of the sub-distributions.
For motor starter applications ABB recommends to use S800S, S800N or S800C.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2, EN 60898
Icn=10kA
Icu=16 kA

S801B

S802B

S803B

S804B

Number of poles	Rated current [A]	GTIN EAN 76122714	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	32	16225	S801B-C32	2CCS811001R0324	0.24	1
	40	16263	S801B-C40	2CCS811001R0404	0.24	1
	50	16300	S801B-C50	2CCS811001R0504	0.24	1
	63	16348	S801B-C63	2CCS811001R0634	0.24	1
2	32	16232	S802B-C32	2CCS812001R0324	0.49	1
	40	16270	S802B-C40	2CCS812001R0404	0.49	1
	50	16317	S802B-C50	2CCS812001R0504	0.49	1
	63	16355	S802B-C63	2CCS812001R0634	0.49	1
3	32	16249	S803B-C32	2CCS813001R0324	0.74	1
	40	16287	S803B-C40	2CCS813001R0404	0.74	1
	50	16324	S803B-C50	2CCS813001R0504	0.74	1
	63	16362	S803B-C63	2CCS813001R0634	0.74	1
4	32	16256	S804B-C32	2CCS814001R0324	0.98	1
	40	16294	S804B-C40	2CCS814001R0404	0.98	1
	50	16331	S804B-C50	2CCS814001R0504	0.98	1
	63	16379	S804B-C63	2CCS814001R0634	0.98	1

High performance MCBs

S800B series cage terminal, D characteristic

S800B-D characteristic

Function: protection and control of the circuits against overloads and short-circuits. With its lower breaking capacity it is designed to meet the needs of the sub-distributions.
For motor starter applications ABB recommends to use S800S, S800N or S800C.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2, EN 60898
Icn=10kA
Icu=16 kA

S801B

Number of poles	Rated current [A]	GTIN EAN 76122714	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	32	15945	S801B-D32	2CCS811001R0321	0.24	1
	40	15983	S801B-D40	2CCS811001R0401	0.24	1
	50	16027	S801B-D50	2CCS811001R0501	0.24	1
	63	16065	S801B-D63	2CCS811001R0631	0.24	1

S802B

2	32	15952	S802B-D32	2CCS812001R0321	0.49	1
	40	15990	S802B-D40	2CCS812001R0401	0.49	1
	50	16034	S802B-D50	2CCS812001R0501	0.49	1
	63	16072	S802B-D63	2CCS812001R0631	0.49	1

S803B

3	32	15969	S803B-D32	2CCS813001R0321	0.74	1
	40	16003	S803B-D40	2CCS813001R0401	0.74	1
	50	16041	S803B-D50	2CCS813001R0501	0.74	1
	63	16089	S803B-D63	2CCS813001R0631	0.74	1

S804B

4	32	15976	S804B-D32	2CCS814001R0321	0.98	1
	40	16010	S804B-D40	2CCS814001R0401	0.98	1
	50	16058	S804B-D50	2CCS814001R0501	0.98	1
	63	16096	S804B-D63	2CCS814001R0631	0.98	1

High performance MCBs

S800B series with cage terminal, K characteristic

S800B-K characteristic
Function: protection and control of the circuits against overloads and short-circuits. With its lower breaking capacity it is designed to meet the needs of the sub-distributions.
For motor starter applications ABB recommends to use S800S, S800N or S800C.
Applications: commercial and industrial.
Standard: IEC/EN 60947-2, EN 60898
Icn=10kA
Icu=16 kA

S801B

S802B

S803B

S804B

Number of poles	Rated current [A]	GTIN EAN 76122714	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	32	15600	S801B-K32	2CCS811001R0537	0.24	1
	40	15723	S801B-K40	2CCS811001R0557	0.24	1
	50	15730	S801B-K50	2CCS811001R0577	0.24	1
	63	15778	S801B-K63	2CCS811001R0597	0.24	1
2	32	15709	S802B-K32	2CCS812001R0537	0.49	1
	40	16775	S802B-K40	2CCS812001R0557	0.49	1
	50	15747	S802B-K50	2CCS812001R0577	0.49	1
	63	15785	S802B-K63	2CCS812001R0597	0.49	1
3	32	15716	S803B-K32	2CCS813001R0537	0.74	1
	40	16799	S803B-K40	2CCS813001R0557	0.74	1
	50	15754	S803B-K50	2CCS813001R0577	0.74	1
	63	15792	S803B-K63	2CCS813001R0597	0.74	1
4	32	16805	S804B-K32	2CCS814001R0537	0.98	1
	40	16812	S804B-K40	2CCS814001R0557	0.98	1
	50	15761	S804B-K50	2CCS814001R0577	0.98	1
	63	15808	S804B-K63	2CCS814001R0597	0.98	1

MCBs

S800S series DC technical features

		S800S-UC
General Data		
Tripping characteristics		UCB, UCK
Standards		IEC/EN 60947-2
Number of poles		1 ... 4
Rated current I_e	A	0.5 ... 125
Rated frequency f	Hz	50/60
Rated insulation voltage U_i acc. to IEC/EN 60664-1	V	DC 1500
Rated impulse withstand voltage $U_{imp.}$ (1.2/50 µs)	kV	8
Dielectric test voltage at ind. freq. for 1 min.	kV	2.4
Overvoltage category		III
Pollution degree		2
Suitability for isolation		yes
Grid distance	mm	-
Data acc. to IEC/EN 60898-1		
Rated operational voltage U_e	V	-
Min. operating voltage	V	-
Rated short-circuit capacity I_{cn}	kA	-
Reference temperature for tripping characteristics	°C	
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	-
Service short-circuit capacity I_{cs}	kA	-
Energy limiting class		-
Data acc. to IEC/EN 60947-2		
Rated operational voltage U_e	V	DC 250 (1-pole) DC 500 (2-pole) DC 750 (3-pole) DC 750 (4-pole) (63 ... 125 A) DC 1000 (4-pole) (up to 50 A)
Min. operating voltage	V	DC 12 V
Rated ultimate short-circuit capacity I_{cu} (Single pole / Multi pole)	kA	DC 250 V (1-pole) =50kA DC 500 V (2-pole) =50kA DC 750 V (3-pole) =50kA DC 750 V (4-pole) (63...125A) =50kA DC 1000V (4-pole)(up to 50A) = 50 kA
Rated service short-circuit capacity I_{cs} (Single pole / Multi pole)	kA	DC 250 V (1-pole): 50kA for I_e <125A; 20kA I_e = 125A DC 500 V (2-pole): 50kA for I_e <125A; 20kA I_e = 125A DC 750 V (3-pole): 50kA for I_e <125A; 20kA I_e = 125A DC 750 V (4-pole): 50kA for I_e =(63...100A); 20kA I_e = 125A DC 1000V (4-pole) (up to I_e = 50A): 50kA
Reference temperature for tripping characteristics	°C	UCB: 30°C UCK: 40°C
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	0.5...100 A: 1500 electrical / 10000 mechanical 125 A: 1000 electrical / 8000 mechanical

MCBs

S800S series DC technical features

		S800S / S803S-KM
Data acc. to UL 1077/ C22.2 No 235, Supplementary Protector (only for S800S)		
Alternating current: int. cap.		1 240: 30 (0.5…63A) 277: 14 (0.5…63A) 347: 6 (0.5…63A)
		2,3,4 240: 30 (0.5...63A) 480 Y/277: 14 (0.5…63A) 600 Y/347: 6 (0.5…63A)
Mechanical Data		
Housing type		Material group I, RAL 7035
Toggle type		black, lockable
Plastic classification acc. to UL94		V0
Classification for the component requirement / hazard level acc. to EN45545-2		R26 / HL3; R22 / HL2
Protection degree acc. to EN 60529		IP20; IP40 (actuating end only)
Shock & Vibration Resistance acc. to IEC 61373		5g / 30ms, Cat 1 / Class B
Resistance to shock acc. to IEC/EN 60068-2-27		5g / 30ms, Test Ea
Resistance to Vibrations acc. to IEC 60068-2-6		5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	°C/RH	16 hours 70°C
Environmental condition (low temp) acc. to IEC/EN 60068-2-1	°C/RH	16 hours -40°C
Ambient temperature (with daily average ≤ +35 °C)	°C	-40....+70
Storage temperature	°C	–40 … +70
Installation		
Terminal type		Failsafe cage or ringlug terminal
Connections (top/bottom) – C_u only	mm^2	1 … 50 flexible 1 … 70 solid (rigid or stranded)
	AWG (S800S only)	10 - 30 A: 14 AWG – 2 AWG 40 - 63 A: 14 AWG – 2 AWG
Tightening torque	Nm	3.5
	in-lbs.	31
Wire stripping length	mm	19
Screwdriver		POZI 2
Mounting type		EN 60715
Mounting position		Any
Supply from		Top and bottom
Dimensions and weight		
Pole dimensions (H x L x W)	mm	95 x 82.5 x 27*
Pole weight	g	ca. 240

* On multi-pole versions, rated current 125A is equipped with a lateral cover of 4.5mm on each product side. Overall product width increases of 9mm

	S800-AUX	S800-AUX/ALT	S800-RSU-H	S800W-RSU	S800S-SCL-SR	S800W-SCL-SR	S800HV-SCL-SR	S800-SOR	S800-UVR	DDA800
Combination with aux. Elements	yes	yes	yes	yes	yes	yes	no	yes	yes	yes

High performance MCBs

S800S series DC range with cage terminal, UC-B characteristic

S800S-UCB characteristic

Function: Non polarized MCB for direct current applications up to 1000 VDC, providing protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream; version dedicated to application in direct current circuits.

Applications: commercial and industrial, universal current .

Standard: IEC/EN 60947-2

Icu=50kA

S801S

S802S

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Coade	Order code		
1	0.5	500351	S801S-UCB0,5	2CCF019969R0001	0.25	1
	1	500368	S801S-UCB1	2CCF019970R0001	0.25	1
	1.6	500375	S801S-UCB1,6	2CCF019971R0001	0.25	1
	2	500382	S801S-UCB2	2CCF019972R0001	0.25	1
	2.5	500399	S801S-UCB2,5	2CCF019973R0001	0.25	1
	3	500405	S801S-UCB3	2CCF019974R0001	0.25	1
	4	500412	S801S-UCB4	2CCF019975R0001	0.25	1
	5	500429	S801S-UCB5	2CCF019976R0001	0.25	1
	6	500436	S801S-UCB6	2CCF019977R0001	0.25	1
	8	500443	S801S-UCB8	2CCF019978R0001	0.25	1
	10	202842	S801S-UCB10	2CCS861001R1105	0.24	1
	13	202859	S801S-UCB13	2CCS861001R1135	0.24	1
	16	202866	S801S-UCB16	2CCS861001R1165	0.24	1
	20	202873	S801S-UCB20	2CCS861001R1205	0.24	1
	25	202880	S801S-UCB25	2CCS861001R1255	0.24	1
	32	202897	S801S-UCB32	2CCS861001R1325	0.24	1
	40	202903	S801S-UCB40	2CCS861001R1405	0.24	1
	50	202910	S801S-UCB50	2CCS861001R1505	0.24	1
	63	202927	S801S-UCB63	2CCS861001R1635	0.24	1
	80	202934	S801S-UCB80	2CCS861001R1805	0.24	1
	100	202941	S801S-UCB100	2CCS861001R1825	0.24	1
	125	202958	S801S-UCB125	2CCS861001R1845	0.24	1
2	0.5	500559	S802S-UCB0,5	2CCF019989R0001	0.49	1
	1	500566	S802S-UCB1	2CCF019990R0001	0.49	1
	1.6	500573	S802S-UCB1,6	2CCF019991R0001	0.49	1
	2	500580	S802S-UCB2	2CCF019992R0001	0.49	1
	2.5	500597	S802S-UCB2,5	2CCF019993R0001	0.49	1
	3	500603	S802S-UCB3	2CCF019994R0001	0.49	1
	4	500610	S802S-UCB4	2CCF019995R0001	0.49	1
	5	500627	S802S-UCB5	2CCF019996R0001	0.49	1
	6	500634	S802S-UCB6	2CCF019997R0001	0.49	1
	8	500641	S802S-UCB8	2CCF019998R0001	0.49	1
	10	202965	S802S-UCB10	2CCS862001R1105	0.49	1
	13	202972	S802S-UCB13	2CCS862001R1135	0.49	1
	16	202989	S802S-UCB16	2CCS862001R1165	0.49	1
	20	202996	S802S-UCB20	2CCS862001R1205	0.49	1
	25	203009	S802S-UCB25	2CCS862001R1255	0.49	1
	32	203016	S802S-UCB32	2CCS862001R1325	0.49	1
	40	203023	S802S-UCB40	2CCS862001R1405	0.49	1
	50	203030	S802S-UCB50	2CCS862001R1505	0.49	1
	63	203047	S802S-UCB63	2CCS862001R1635	0.49	1
	80	203054	S802S-UCB80	2CCS862001R1805	0.49	1
	100	203061	S802S-UCB100	2CCS862001R1825	0.49	1
	125	523343	S802S-UCB125	2CCG001894R0001	0.515	1

*For DC applications

High performance MCBs

S800S series DC range with cage terminal, UC-B characteristic

S803S

S804S

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
3	0.5	502713	S803S-UCB0,5	2CCF030040R0001	0.74	1
	1	502720	S803S-UCB1	2CCF030041R0001	0.74	1
	1.6	502874	S803S-UCB1,6	2CCF030056R0001	0.74	1
	2	502737	S803S-UCB2	2CCF030042R0001	0.74	1
	2.5	502744	S803S-UCB2,5	2CCF030043R0001	0.74	1
	3	502881	S803S-UCB3	2CCF030057R0001	0.74	1
	4	502751	S803S-UCB4	2CCF030044R0001	0.74	1
	5	502768	S803S-UCB5	2CCF030045R0001	0.74	1
	6	502898	S803S-UCB6	2CCF030058R0001	0.74	1
	8	500849	S803S-UCB8	2CCF020018R0001	0.74	1
	10	203085	S803S-UCB10	2CCS863001R1105	0.74	1
	13	203092	S803S-UCB13	2CCS863001R1135	0.74	1
	16	203108	S803S-UCB16	2CCS863001R1165	0.74	1
	20	203115	S803S-UCB20	2CCS863001R1205	0.74	1
	25	203122	S803S-UCB25	2CCS863001R1255	0.74	1
	32	203139	S803S-UCB32	2CCS863001R1325	0.74	1
	40	203146	S803S-UCB40	2CCS863001R1405	0.74	1
	50	203153	S803S-UCB50	2CCS863001R1505	0.74	1
	63	203160	S803S-UCB63	2CCS863001R1635	0.74	1
	80	203177	S803S-UCB80	2CCS863001R1805	0.74	1
	100	203184	S803S-UCB100	2CCS863001R1825	0.74	1
	125	523381	S803S-UCB125	2CCG001898R0001	0.765	1
4	0.5	500955	S804S-UCB0,5	2CCF020029R0001	0.98	1
	1	500962	S804S-UCB1	2CCF020030R0001	0.98	1
	1.6	500979	S804S-UCB1,6	2CCF020031R0001	0.98	1
	2	500986	S804S-UCB2	2CCF020032R0001	0.98	1
	2.5	500993	S804S-UCB2,5	2CCF020033R0001	0.98	1
	3	501006	S804S-UCB3	2CCF020034R0001	0.98	1
	4	501013	S804S-UCB4	2CCF020035R0001	0.98	1
	5	502775	S804S-UCB5	2CCF030046R0001	0.98	1
	6	502782	S804S-UCB6	2CCF030047R0001	0.98	1
	8	502904	S804S-UCB8	2CCF030059R0001	0.98	1
	10	203207	S804S-UCB10	2CCS864001R1105	0.98	1
	13	203214	S804S-UCB13	2CCS864001R1135	0.98	1
	16	203221	S804S-UCB16	2CCS864001R1165	0.98	1
	20	203238	S804S-UCB20	2CCS864001R1205	0.98	1
	25	203245	S804S-UCB25	2CCS864001R1255	0.98	1
	32	203252	S804S-UCB32	2CCS864001R1325	0.98	1
	40	203269	S804S-UCB40	2CCS864001R1405	0.98	1
	50	203276	S804S-UCB50	2CCS864001R1505	0.98	1
	63	203283	S804S-UCB63	2CCS864001R1635	0.98	1
	80	203290	S804S-UCB80	2CCS864001R1805	0.98	1
	100	203306	S804S-UCB100	2CCS864001R1825	0.98	1
	125	523428	S804S-UCB125	2CCG001902R0001	1.005	1

*For DC applications

High performance MCBs

S800S series DC range with ring terminal connection, UC-B characteristic

S801S

S802S

S800S-UCB characteristic

Function: Non polarized MCB for direct current applications up to 1000 VDC, providing protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream; version dedicated to application in direct current circuits.

Applications: commercial and industrial, universal current .

Standard: IEC/EN 60947-2

Icu=50kA

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	10	210359	S801S-UCB10-R	2CCS861002R1105		0.245	1
	13	210366	S801S-UCB13-R	2CCS861002R1135		0.245	1
	16	210373	S801S-UCB16-R	2CCS861002R1165		0.245	1
	20	210380	S801S-UCB20-R	2CCS861002R1205		0.245	1
	25	210397	S801S-UCB25-R	2CCS861002R1255		0.245	1
	32	210403	S801S-UCB32-R	2CCS861002R1325		0.245	1
	40	208424	S801S-UCB40-R	2CCS861002R1405		0.245	1
	50	208431	S801S-UCB50-R	2CCS861002R1505		0.245	1
	63	208448	S801S-UCB63-R	2CCS861002R1635		0.245	1
	80	208455	S801S-UCB80-R	2CCS861002R1805		0.245	1
	100	208462	S801S-UCB100-R	2CCS861002R1825		0.245	1
	125	208479	S801S-UCB125-R	2CCS861002R1845		0.245	1
2	10	210410	S802S-UCB10-R	2CCS862002R1105		0.49	1
	13	210427	S802S-UCB13-R	2CCS862002R1135		0.49	1
	16	210434	S802S-UCB16-R	2CCS862002R1165		0.49	1
	20	210441	S802S-UCB20-R	2CCS862002R1205		0.49	1
	25	210458	S802S-UCB25-R	2CCS862002R1255		0.49	1
	32	210465	S802S-UCB32-R	2CCS862002R1325		0.49	1
	40	208486	S802S-UCB40-R	2CCS862002R1405		0.49	1
	50	208493	S802S-UCB50-R	2CCS862002R1505		0.49	1
	63	208509	S802S-UCB63-R	2CCS862002R1635		0.49	1
	80	208516	S802S-UCB80-R	2CCS862002R1805		0.49	1
	100	208523	S802S-UCB100-R	2CCS862002R1825		0.49	1
	125	523367	S802S-UCB125-R	2CCG001896R0001		0.515	1

High performance MCBs

S800S series DC range with ring terminal connection, UC-B characteristic

S803S

S804S

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	10	210472	S803S-UCB10-R	2CCS863002R1105		0.735	1
	13	210489	S803S-UCB13-R	2CCS863002R1135		0.735	1
	16	210496	S803S-UCB16-R	2CCS863002R1165		0.735	1
	20	210502	S803S-UCB20-R	2CCS863002R1205		0.735	1
	25	210519	S803S-UCB25-R	2CCS863002R1255		0.735	1
	32	210526	S803S-UCB32-R	2CCS863002R1325		0.735	1
	40	208547	S803S-UCB40-R	2CCS863002R1405		0.735	1
	50	208554	S803S-UCB50-R	2CCS863002R1505		0.735	1
	63	208561	S803S-UCB63-R	2CCS863002R1635		0.735	1
	80	208578	S803S-UCB80-R	2CCS863002R1805		0.735	1
	100	208585	S803S-UCB100-R	2CCS863002R1825		0.735	1
	125	523404	S803S-UCB125-R	2CCG001900R0001		0.76	1
4	10	210533	S804S-UCB10-R	2CCS864002R1105		0.98	1
	13	210540	S804S-UCB13-R	2CCS864002R1135		0.98	1
	16	210557	S804S-UCB16-R	2CCS864002R1165		0.98	1
	20	210564	S804S-UCB20-R	2CCS864002R1205		0.98	1
	25	210571	S804S-UCB25-R	2CCS864002R1255		0.98	1
	32	210588	S804S-UCB32-R	2CCS864002R1325		0.98	1
	40	208608	S804S-UCB40-R	2CCS864002R1405		0.98	1
	50	208615	S804S-UCB50-R	2CCS864002R1505		0.98	1
	63	208622	S804S-UCB63-R	2CCS864002R1635		0.98	1
	80	208639	S804S-UCB80-R	2CCS864002R1805		0.98	1
	100	208646	S804S-UCB100-R	2CCS864002R1825		0.98	1
	125	523442	S804S-UCB125-R	2CCG001904R0001		1.005	1

High performance MCBs

S800S series DC range with cage terminal, UC-K characteristic

S801S

S802S

S800S-UCK characteristic

Function: Non polarized MCB for direct current applications up to 1000 VDC, providing protection and control of the circuits like motors, transformer and auxiliary circuits, against overloads and short-circuits when a high breaking capacity is required; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream; version dedicated to application in direct current circuits.

Advantages: no nuisance tripping in the case of functional peak currents up to 10xIn, depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines.

Applications: commercial and industrial, universal current.

Standard: IEC/EN 60947-2

Icu=50kA

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	0.5	500450	S801S-UCK0,5	2CCF019979R0001	0.25	1
	1	500467	S801S-UCK1	2CCF019980R0001	0.25	1
	1.6	500474	S801S-UCK1,6	2CCF019981R0001	0.25	1
	2	500481	S801S-UCK2	2CCF019982R0001	0.25	1
	2.5	500498	S801S-UCK2,5	2CCF019983R0001	0.25	1
	3	500504	S801S-UCK3	2CCF019984R0001	0.25	1
	4	500511	S801S-UCK4	2CCF019985R0001	0.25	1
	5	500528	S801S-UCK5	2CCF019986R0001	0.25	1
	6	500535	S801S-UCK6	2CCF019987R0001	0.25	1
	8	500542	S801S-UCK8	2CCF019988R0001	0.25	1
	10	203320	S801S-UCK10	2CCS861001R1427	0.24	1
	13	203337	S801S-UCK13	2CCS861001R1447	0.24	1
	16	203344	S801S-UCK16	2CCS861001R1467	0.24	1
	20	203351	S801S-UCK20	2CCS861001R1487	0.24	1
	25	203368	S801S-UCK25	2CCS861001R1517	0.24	1
	32	203375	S801S-UCK32	2CCS861001R1537	0.24	1
	40	203382	S801S-UCK40	2CCS861001R1557	0.24	1
	50	203399	S801S-UCK50	2CCS861001R1577	0.24	1
	63	203405	S801S-UCK63	2CCS861001R1597	0.24	1
	80	203412	S801S-UCK80	2CCS861001R1627	0.24	1
	100	203429	S801S-UCK100	2CCS861001R1637	0.24	1
	125	203436	S801S-UCK125	2CCS861001R1647	0.24	1
2	0.5	500658	S802S-UCK0,5	2CCF019999R0001	0.49	1
	1	502652	S802S-UCK1	2CCF030034R0001	0.49	1
	1.6	502669	S802S-UCK1,6	2CCF030035R0001	0.49	1
	2	502843	S802S-UCK2	2CCF030053R0001	0.49	1
	2.5	502676	S802S-UCK2,5	2CCF030036R0001	0.49	1
	3	502683	S802S-UCK3	2CCF030037R0001	0.49	1
	4	502850	S802S-UCK4	2CCF030054R0001	0.49	1
	5	502690	S802S-UCK5	2CCF030038R0001	0.49	1
	6	502706	S802S-UCK6	2CCF030039R0001	0.49	1
	8	502867	S802S-UCK8	2CCF030055R0001	0.49	1
	10	203443	S802S-UCK10	2CCS862001R1427	0.49	1
	13	203450	S802S-UCK13	2CCS862001R1447	0.49	1
	16	203467	S802S-UCK16	2CCS862001R1467	0.49	1
	20	203474	S802S-UCK20	2CCS862001R1487	0.49	1
	25	203481	S802S-UCK25	2CCS862001R1517	0.49	1
	32	203498	S802S-UCK32	2CCS862001R1537	0.49	1
	40	203504	S802S-UCK40	2CCS862001R1557	0.49	1
	50	203511	S802S-UCK50	2CCS862001R1577	0.49	1
	63	203528	S802S-UCK63	2CCS862001R1597	0.49	1
	80	203535	S802S-UCK80	2CCS862001R1627	0.49	1
	100	203542	S802S-UCK100	2CCS862001R1637	0.49	1
	125	523336	S802S-UCK125	2CCG001893R0001	0.515	1

*For DC applications

High performance MCBs

S800S series DC range with cage terminal, UC-K characteristic

S803S

S804S

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
3	0.5	500856	S803S-UCK0,5	2CCF020019R0001	0.74	1
	1	500863	S803S-UCK1	2CCF020020R0001	0.74	1
	1.6	500870	S803S-UCK1,6	2CCF020021R0001	0.74	1
	2	500887	S803S-UCK2	2CCF020022R0001	0.74	1
	2.5	500894	S803S-UCK2,5	2CCF020023R0001	0.74	1
	3	500900	S803S-UCK3	2CCF020024R0001	0.74	1
	4	500917	S803S-UCK4	2CCF020025R0001	0.74	1
	5	500924	S803S-UCK5	2CCF020026R0001	0.74	1
	6	500931	S803S-UCK6	2CCF020027R0001	0.74	1
	8	500948	S803S-UCK8	2CCF020028R0001	0.74	1
	10	203566	S803S-UCK10	2CCS863001R1427	0.74	1
	13	203573	S803S-UCK13	2CCS863001R1447	0.74	1
	16	203580	S803S-UCK16	2CCS863001R1467	0.74	1
	20	203597	S803S-UCK20	2CCS863001R1487	0.74	1
	25	203603	S803S-UCK25	2CCS863001R1517	0.74	1
	32	203610	S803S-UCK32	2CCS863001R1537	0.74	1
	40	203627	S803S-UCK40	2CCS863001R1557	0.74	1
	50	203634	S803S-UCK50	2CCS863001R1577	0.74	1
	63	203641	S803S-UCK63	2CCS863001R1597	0.74	1
	80	203658	S803S-UCK80	2CCS863001R1627	0.74	1
	100	203665	S803S-UCK100	2CCS863001R1637	0.74	1
	125	523374	S803S-UCK125	2CCG001897R0001	0.765	1
4	0.5	502799	S804S-UCK0,5	2CCF030048R0001	0.98	1
	1	502805	S804S-UCK1	2CCF030049R0001	0.98	1
	1.6	502911	S804S-UCK1,6	2CCF030060R0001	0.98	1
	2	502812	S804S-UCK2	2CCF030050R0001	0.98	1
	2.5	502829	S804S-UCK2,5	2CCF030051R0001	0.98	1
	3	502928	S804S-UCK3	2CCF030061R0001	0.98	1
	4	502836	S804S-UCK4	2CCF030052R0001	0.98	1
	5	502416	S804S-UCK5	2CCF030020R0001	0.98	1
	6	502607	S804S-UCK6	2CCF030029R0001	0.98	1
	8	501143	S804S-UCK8	2CCF020048R0001	0.98	1
	10	203689	S804S-UCK10	2CCS864001R1427	0.98	1
	13	203696	S804S-UCK13	2CCS864001R1447	0.98	1
	16	203702	S804S-UCK16	2CCS864001R1467	0.98	1
	20	203719	S804S-UCK20	2CCS864001R1487	0.98	1
	25	203726	S804S-UCK25	2CCS864001R1517	0.98	1
	32	203733	S804S-UCK32	2CCS864001R1537	0.98	1
	40	203740	S804S-UCK40	2CCS864001R1557	0.98	1
	50	203757	S804S-UCK50	2CCS864001R1577	0.98	1
	63	203764	S804S-UCK63	2CCS864001R1597	0.98	1
	80	203771	S804S-UCK80	2CCS864001R1627	0.98	1
	100	203788	S804S-UCK100	2CCS864001R1637	0.98	1
	125	523411	S804S-UCK125	2CCG001901R0001	1.005	1

*For DC applications

High performance MCBs

S800S series DC range with ring terminal connection, UC-K characteristic

S800S-UCK characteristic
Function: Non polarized MCB for direct current applications up to 1000 VDC, providing protection and control of the circuits like motors, transformer and auxiliary circuits, against overloads and short-circuits when a high breaking capacity is required; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream; version dedicated to application in direct current circuits.
Advantages: no nuisance tripping in the case of functional peak currents up to 10xIn, depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines.
Applications: commercial and industrial, universal current.
Standard: IEC/EN 60947-2
Icu=50kA

S801S

S802S

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
1	10	210595	S801S-UCK10-R	2CCS861002R1427		0.245	1
	13	210601	S801S-UCK13-R	2CCS861002R1447		0.245	1
	16	210618	S801S-UCK16-R	2CCS861002R1467		0.245	1
	20	210625	S801S-UCK20-R	2CCS861002R1487		0.245	1
	25	210632	S801S-UCK25-R	2CCS861002R1517		0.245	1
	32	210649	S801S-UCK32-R	2CCS861002R1537		0.245	1
	40	208660	S801S-UCK40-R	2CCS861002R1557		0.245	1
	50	208677	S801S-UCK50-R	2CCS861002R1577		0.245	1
	63	208684	S801S-UCK63-R	2CCS861002R1597		0.245	1
	80	208691	S801S-UCK80-R	2CCS861002R1627		0.245	1
	100	208707	S801S-UCK100-R	2CCS861002R1637		0.245	1
	125	208714	S801S-UCK125-R	2CCS861002R1647		0.245	1
2	10	210656	S802S-UCK10-R	2CCS862002R1427		0.490	1
	13	210663	S802S-UCK13-R	2CCS862002R1447		0.490	1
	16	210670	S802S-UCK16-R	2CCS862002R1467		0.490	1
	20	210687	S802S-UCK20-R	2CCS862002R1487		0.490	1
	25	210694	S802S-UCK25-R	2CCS862002R1517		0.490	1
	32	210700	S802S-UCK32-R	2CCS862002R1537		0.490	1
	40	208721	S802S-UCK40-R	2CCS862002R1557		0.490	1
	50	208738	S802S-UCK50-R	2CCS862002R1577		0.490	1
	63	208745	S802S-UCK63-R	2CCS862002R1597		0.490	1
	80	208752	S802S-UCK80-R	2CCS862002R1627		0.490	1
	100	208769	S802S-UCK100-R	2CCS862002R1637		0.490	1
	125	523350	S802S-UCK125-R	2CCG001895R0001		0.515	1

High performance MCBs

S800S series DC range with ring terminal connection, UC-K characteristic

S803S

S804S

Number of poles	Rated current In A	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	10	210717	S803S-UCK10-R	2CCS863002R1427		0.735	1
	13	210724	S803S-UCK13-R	2CCS863002R1447		0.735	1
	16	210731	S803S-UCK16-R	2CCS863002R1467		0.735	1
	20	210748	S803S-UCK20-R	2CCS863002R1487		0.735	1
	25	210755	S803S-UCK25-R	2CCS863002R1517		0.735	1
	32	210762	S803S-UCK32-R	2CCS863002R1537		0.735	1
	40	208783	S803S-UCK40-R	2CCS863002R1557		0.735	1
	50	208790	S803S-UCK50-R	2CCS863002R1577		0.735	1
	63	208806	S803S-UCK63-R	2CCS863002R1597		0.735	1
	80	208813	S803S-UCK80-R	2CCS863002R1627		0.735	1
	100	208820	S803S-UCK100-R	2CCS863002R1637		0.735	1
	125	523398	S803S-UCK125-R	2CCG001899R0001		0.76	1
4	10	210779	S804S-UCK10-R	2CCS864002R1427		0.98	1
	13	210786	S804S-UCK13-R	2CCS864002R1447		0.98	1
	16	210793	S804S-UCK16-R	2CCS864002R1467		0.98	1
	20	210809	S804S-UCK20-R	2CCS864002R1487		0.98	1
	25	210816	S804S-UCK25-R	2CCS864002R1517		0.98	1
	32	210823	S804S-UCK32-R	2CCS864002R1537		0.98	1
	40	208844	S804S-UCK40-R	2CCS864002R1557		0.98	1
	50	208851	S804S-UCK50-R	2CCS864002R1577		0.98	1
	63	208868	S804S-UCK63-R	2CCS864002R1597		0.98	1
	80	208875	S804S-UCK80-R	2CCS864002R1627		0.98	1
	100	208882	S804S-UCK100-R	2CCS864002R1637		0.98	1
	125	523435	S804S-UCK125-R	2CCG001903R0001		1.005	1

High performance MCBs

S800PV-SP series technical features

		S800PV-SP
General Data		
Tripping characteristics		SP
Standards		IEC / EN 60947-2 and Annex P (specific for PV)
Number of poles		2 ... 4
Rated frequency I_e	A	5 ... 125
Rated frequency f	Hz	-
Rated insulation voltage U_i acc. to IEC/EN 60664-1	V	DC 1500
Rated impulse withstand voltage $U_{imp.}$ (1.2/50 µs)	kV	8
Dielectric test voltage at ind. freq. for 1 min.	kV	3
Overvoltage category		III*
Pollution degree		2
Suitability for isolation		yes
Grid distance	**mm**	**50**
Data acc. to IEC/EN 60947-2		
Rated operational voltage U_e	V	2-pole DC 800 V: 5 ... 125 A 3-pole DC 1200 V: 5 ... 125 A 4-pole DC 1500 V: 5 ... 125 A
Min. operating voltage	V	-
Rated ultimate short-circuit capacity I_{cu}	kA	5 ... 16 A acc. IEC 60947-2 Annex P. I_{cu} = 5 kA 20 ... 125 A, acc. IEC 60947-2, I_{cu} = 5 kA 20 ... 125 A, acc. IEC 60947-2 Annex P. I_{cu} = 3 kA
Rated service short-circuit capacity I_{cs}	kA	$I_{cu} = I_{cs}$
Reference temperature for tripping characteristics	°C	40 °C
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	acc. to Annex P: 5 ... 16 A: 300 electrical/9700 mechanical acc. to IEC 60947-2 (general part): 20 ... 100 A: 1500 electrical/8500 mechanical 125 A: 1000 electrical/9000 mechanical
Mechanical Data		
Housing type		Material group I, RAL 7035
Toggle type		black, lockable
Plastic classification acc. to UL94		V0
Protection degree acc. to EN 60529		IP20; IP40 (actuating end only)
Resistance to shock acc. to IEC/EN 60068-2-27		5g / 30ms, Test Ea
Shock resistance acc. To IEC/EN 61373		5g / 30ms, Cat 1 / Class B
Resistance to Vibrations acc. to IEC 60068-2-6		5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	°C/RH	16 hours 70°C
Environmental condition (low temp)acc. to IEC/EN 60068-2-1	°C/RH	16 hours -40°C
Ambient temperature (with daily average ≤ +35°C)	°C	-40....+70
Storage temperature	°C	-40 ... +70
Installation		
Terminal type		Failsafe cage or ringlug terminal
Connections (top/bottom) - C_u only	mm^2	1 ... 50 flexible 1 ... 70 solid (rigid or stranded)
Tightening torque	Nm	3.5
	in-lbs.	31
Wire stripping length	mm	19
Screwdriver		POZI 2
Mounting type		Any
Mounting position		Any
Supply from		Top and bottom
Dimensions and weight		
Pole dimensions (H x L x W)	mm	95 x 82.5 x 27**
Pole weight	g	240

*The pollution degree of the product, as defined in standard IEC 60947-1, is related to its micro environment, to which equipment is exposed. It may be different from that of the macro-environment. According to where the equipment is located, the pollution degree of the macro environment can be considered up to category IV if protection is offered by means of such as an adequate enclosure or internal heating to prevent absorption or condensation of moisture.

**On multi-pole versions, rated current 125A is equipped with a lateral cover of 4.5mm on each product side. Overall product width increases of 9mm

High performance MCBs

S800PV series with cage terminal, SP characteristic

S802PV

S803PV

S804PV

S800PV-SP

Function: non polarized MCB for various direct current applications up to 1500 VDC. Particularly suitable for protection and control of photovoltaic strings against overloads, short-circuits and reverse currents.

Applications: Industrial in direct current, photovoltaic systems.

Standard: IEC/EN 60947-2 and Annex P

5 ... 16A acc. IEC 60947-2 Annex P., I_{cu} 5 kA

20 ... 125A acc. IEC 60947-2, I_{cu} 5 kA

20 ... 125A acc. IEC 60947-2 Annex P., I_{cu} 3 kA

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
2	5	471170	S802PV-SP5	2CCF019596R0001	0.49	1
	6	472115	S802PV-SP6	2CCF019643R0001	0.49	1
	8	472139	S802PV-SP8	2CCF019644R0001	0.49	1
	10	471194	S802PV-SP10	2CCF019597R0001	0.49	1
	13	471217	S802PV-SP13	2CCF019598R0001	0.49	1
	16	471231	S802PV-SP16	2CCF019599R0001	0.49	1
	20	471255	S802PV-SP20	2CCF019600R0001	0.49	1
	25	471279	S802PV-SP25	2CCF019601R0001	0.49	1
	32	471293	S802PV-SP32	2CCF019602R0001	0.49	1
	40	471316	S802PV-SP40	2CCF019603R0001	0.49	1
	50	471330	S802PV-SP50	2CCF019604R0001	0.49	1
	63	471354	S802PV-SP63	2CCF019605R0001	0.49	1
	80	471378	S802PV-SP80	2CCF019606R0001	0.49	1
	100	471392	S802PV-SP100	2CCF019607R0001	0.49	1
	125	520700	S802PV-SP125	2CCG001601R0001	0.515	1
3	5	471439	S803PV-SP5	2CCF019609R0001	0.74	1
	6	472153	S803PV-SP6	2CCF019645R0001	0.74	1
	8	472177	S803PV-SP8	2CCF019646R0001	0.74	1
	10	471453	S803PV-SP10	2CCF019610R0001	0.74	1
	13	471477	S803PV-SP13	2CCF019611R0001	0.74	1
	16	471491	S803PV-SP16	2CCF019612R0001	0.74	1
	20	471514	S803PV-SP20	2CCF019613R0001	0.74	1
	25	471538	S803PV-SP25	2CCF019614R0001	0.74	1
	32	471552	S803PV-SP32	2CCF019615R0001	0.74	1
	40	471576	S803PV-SP40	2CCF019616R0001	0.74	1
	50	471590	S803PV-SP50	2CCF019617R0001	0.74	1
	63	471613	S803PV-SP63	2CCF019618R0001	0.74	1
	80	471637	S803PV-SP80	2CCF019619R0001	0.74	1
	100	471651	S803PV-SP100	2CCF019620R0001	0.74	1
	125	520717	S803PV-SP125	2CCG001602R0001	0.765	1
4	5	452124	S804PV-SP5	2CCF019586R0001	0.98	1
	6	472191	S804PV-SP6	2CCF019647R0001	0.98	1
	8	472214	S804PV-SP8	2CCF019648R0001	0.98	1
	10	471699	S804PV-SP10	2CCF019622R0001	0.98	1
	13	471712	S804PV-SP13	2CCF019623R0001	0.98	1
	16	471736	S804PV-SP16	2CCF019624R0001	0.98	1
	20	471750	S804PV-SP20	2CCF019625R0001	0.98	1
	25	471774	S804PV-SP25	2CCF019626R0001	0.98	1
	32	471798	S804PV-SP32	2CCF019627R0001	0.98	1
	40	471811	S804PV-SP40	2CCF019628R0001	0.98	1
	50	471835	S804PV-SP50	2CCF019629R0001	0.98	1
	63	471859	S804PV-SP63	2CCF019630R0001	0.98	1
	80	471873	S804PV-SP80	2CCF019631R0001	0.98	1
	100	471897	S804PV-SP100	2CCF019632R0001	0.98	1
	125	520724	S804PV-SP125	2CCG001603R0001	1.005	1

Switch Disconnectors

S802PV-M-H and S800PV-SD technical features

		S802PV-M-H	S800PV-SD
General Data			
Tripping characteristics		none	none
Standards		IEC / EN 60947-3	IEC / EN 60947-3 and Annex D
Number of poles		2 (polarized)	2 ... 4
Rated current I_e	A	32, 63, 100	32, 63, 125
Rated insulation voltage U_i acc. to IEC/EN 60664-1	V	DC 1500	DC 1500
Rated impulse withstand voltage $U_{imp.}$ (1.2/50 µs)	kV	8	8
Dielectric test voltage at ind. freq. for 1 min.	kV	3	3
Overvoltage category		III*	III*
Pollution degree		2	2
Suitability for isolation		yes	yes
Grid distance	**mm**	**50**	**50**
Data acc. to IEC/EN 60947-3			
Rated operational voltage U_e	V	DC 1000V: 2-pole	DC 800V: 2-pole DC 1200V: 3-Pole DC 1500V: 4-pole
Min. operating voltage	V	-	-
Rated short-term withstand current I_{cw}	kA	1.5	1.5
Rated short-circuit making capacity I_{cm}	kA	0.5	0.5
Utilisation category		DC-21A	DC-21A, DC-PV2
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	1500 electrical / 10000 mechanical	32, 63 A: 1500 electrical / 10000 mechanical 125 A: 1000 electrical / 8000 mechanical
Mechanical Data			
Housing type		Material group I, RAL 7035	Material group I, RAL 7035
Toggle type		black, lockable	black, lockable
Plastic classification acc. to UL94		V0	
Protection degree acc. to EN 60529		IP20; IP40 (actuating end only)	IP20; IP40 (actuating end only)
Resistance to shock acc. to IEC/EN 60068-2-27		5g / 30ms, Test Ea	5g / 30ms, Test Ea
Shock resistance acc. To IEC/EN 61373		5g / 30ms, Cat 1 / Class B	5g / 30ms, Cat 1 / Class B
Resistance to Vibrations acc. to IEC 60068-2-6		5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc	5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	°C/RH	16 hours 70°C	16 hours 70°C
Environmental condition (low temp) acc. to IEC/EN 60068-2-1		16 hours -40°C	16 hours -40°C
Ambient temperature (with daily average ≤ +35°C)	°C	-40....+70	-40....+70
Storage temperature	°C	-40 ... +70	-40 ... +70
Installation			
Terminal type		Failsafe cage or ringlug terminal	Failsafe cage or ringlug terminal
Connections (top/bottom) - C_u only	mm^2	1 ... 50 flexible 1 ... 70 solid (rigid or stranded)	1 ... 50 flexible 1 ... 70 solid (rigid or stranded)
Tightening torque	Nm	3.5	3.5
	in-lbs.	31	31
Wire stripping length	mm	19	19
Screwdriver		POZI 2	POZI 2
Mounting type		Any	Any
Mounting position		Any	Any
Supply from		Top and bottom (taking into account the polarization)	Top and bottom
Dimensions and weight			
Pole dimensions (H x L x W)	mm	95 x 82.5 x 27	95 x 82.5 x 27
Pole weight	g	240	240

*The pollution degree of the product, as defined in standard IEC 60947-1, is related to its micro environment, to which equipment is exposed. It may be different from that of the macro-environment. According to where the equipment is located, the pollution degree of the macro environment can be considered up to category IV, if protection is offered by means of such as an adequate enclosure or internal heating to prevent absorption or condensation of moisture.

Switch Disconnectors

S802PV-M-H and S800PV-SD technical features

		S800PV-SP	S800PV-SD	S800PV-M-H
Combination with aux. elements	S800-AUX	yes	yes	yes
	S800-AUX/ALT	yes	no	no
	S800-RSU-H	yes	yes	yes
	S800W-RSU	yes	yes	yes
	S800-SOR	yes	yes	yes
	S800-UVR	yes	yes	yes

Switch Disconnectors

S800PV-M-H and S80PV-SD series

S802PV



S802PV-M-H

Function: this polarized disconnector is designed to meet the requirements for photovoltaic systems. Voltage up to 1000 V d.c. and rated current up to 100 A.

Applications: Photovoltaic systems

Rated short-term withstand current, Icw 1,5 kA

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
2	32	419035	S802PV-M32-H	2CCP247204R0001	0.43	1
	63	419042	S802PV-M63-H	2CCP247205R0001	0.43	1
	100	419301	S802PV-M100-H	2CCP247212R0001	0.43	1

S800PV-SD

Function: Non polarized switch disconnector for DC side isolation of PV systems. Designed for PV installations of 1500 V DC.

Applications: Photovoltaic systems

Rated short-term withstand current, Icw 1,5 kA

S802PV

S803PV

S804PV

Number of poles	Rated current [A]	GTIN EAN 76122714	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
2	32	71958	S802PV-SD32	2CCF019635R0001	0.43	1
	63	71934	S802PV-SD63	2CCF019634R0001	0.43	1
	125	71972	S802PV-SD125	2CCF019636R0001	0.43	1
3	32	71996	S803PV-SD32	2CCF019637R0001	0.65	1
	63	72016	S803PV-SD63	2CCF019638R0001	0.65	1
	125	72030	S803PV-SD125	2CCF019639R0001	0.65	1
4	32	72054	S804PV-SD32	2CCF019640R0001	0.86	1
	63	72078	S804PV-SD63	2CCF019641R0001	0.86	1
	125	72092	S804PV-SD125	2CCF019642R0001	0.86	1

MCBs

S800HV series technical features

		S800HV
General Data		
Tripping characteristics		C, K
Standards		IEC/EN 60947-2, UL 1077 (only 3P, 10...32 A)
Number of poles		1 ... 3
Rated current I_n	A	0.5 ... 125
Rated frequency f	Hz	50/60
Rated Insulation Voltage U_i acc. to IEC/EN 60664-1	V	AC 1000
Rated Impulse Withstand Voltage U_{imp}. (1.2/50 µs)	kV	8
Dielectric test voltage at ind. freq. for 1 min.	kV	2.4
Overvoltage category		III
Pollution degree		2
Suitability for isolation		yes
Grid distance	mm	50
Data acc. to IEC/EN 60947-2		
Rated operational voltage U_e	V	AC 580/1000
Min. operating voltage	V	AC 12
Rated operational current I_n	A	0.5 ... 125
Rated ultimate short-circuit capacity I_{cu}	kA	1.5 (0.5...5 A) 4 (6 ... 63 A) 3 (80 ... 125 A)
Rated service short-circuit capacity I_{cs}	kA	1.5 (0.5 ... 5 A) 2.5 (6 ... 63 A) 2 (80 ... 125 A)
Reference temperature for tripping characteristics	°C	40 °C
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	0.5 ... 100 A: 1500 electrical/10000 mechanical 125 A: 1000 electrical/8000 mechanical
Data according to UL 1077/ C22.2 No 235, Supplementary Protector		
Interrupting rating		600 Y/347: 15 kA (3P, 10...32A)*
Mechanical Data		
Housing type		Material group I, RAL 7035
Toggle type		black, lockable
Plastic classification acc. to UL94		V0
Protection degree acc. to EN 60529		IP20; IP40 (actuating end only)
Classification acc. To NF F 126-101, NF F 16-102		I3, F2
Shock resistance acc. to IEC/EN 61373		5g / 30ms, Cat 1 / Class B
Resistance to shock acc. to IEC/EN 60068-2-27		5g / 30ms, Test Ea
Resistance to Vibrations acc. to IEC 60068-2-6		5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	°C/RH	16 hours 70°C
Environmental condition (low temp) acc. to IEC/EN 60068-2-1	°C/RH	16 hours -40°C
Ambient temperature (with daily average ≤ +35°C)	°C	-40....+70
Storage temperature	°C	–40 ... +70
Installation		
Terminal type		Failsafe cage terminal
Connections (top/bottom) – C_u only	mm^2	1 ... 50 flexible 1 ... 70 solid (rigid or stranded)
Tightening torque	Nm	3.5
Wire stripping length	mm	19
Screwdriver		POZI 2
Mounting type		EN 60715
Mounting position		Any
Supply from		Top and bottom
Dimensions and weight		
Pole dimensions (H x L x W)	mm	142 x 82.5 x 27**
Pole weight	kg	0.27

* 3P, 10 ... 32 A - only valid with XT2L 125 TMF 35-400

** On multi-pole versions, rated current 125A is equipped with a lateral cover of 4.5mm on each product side. Overall product width increases of 9mm

	S800-AUX	S800-AUX/ALT	S800-RSU-H	S800W-RSU	S800S-SCL-SR	S800W-SCL-SR	S800HV-SCL-SR	S800-SOR	S800-UVR	DDA800
Combination with aux. Elements	yes	yes	yes	yes	no	no	yes	yes	yes	no

High performance MCBs

S800HV series for application up to 1000V AC

S800HV-K characteristics

Function: protection and control of the circuits against overloads and short-circuits. With increased voltage level 580/1000 VAC, it is ideal for installation in AC side of high-power conversion systems (PCS) in photovoltaic and wind turbine installations.

Applications: Industrial, high-power conversion systems

Standard: IEC/EN 60947-2, UL 1077, supplementary protector (only 3P)

Icu 1.5 kA (0.5...5 A) 4 kA (6 ... 63 A); 3 kA (80 ... 125 A)

S801HV

S802HV

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	0.5	501150	S801HV-K0,5	2CCF020049R0001	0.27	1
	1	501167	S801HV-K1	2CCF020050R0001	0.27	1
	1.6	502423	S801HV-K1,6	2CCF030021R0001	0.27	1
	2	502430	S801HV-K2	2CCF030022R0001	0.27	1
	2.5	502614	S801HV-K2,5	2CCF030030R0001	0.27	1
	3	502447	S801HV-K3	2CCF030023R0001	0.27	1
	4	502454	S801HV-K4	2CCF030024R0001	0.27	1
	5	502621	S801HV-K5	2CCF030031R0001	0.27	1
	6	436445	S801HV-K6	2CCF019005R0001	0.27	1
	8	436964	S801HV-K8	2CCF019006R0001	0.27	1
	10	436452	S801HV-K10	2CCF019007R0001	0.27	1
	13	436469	S801HV-K13	2CCF019008R0001	0.27	1
	16	436476	S801HV-K16	2CCF019009R0001	0.27	1
	20	436483	S801HV-K20	2CCF019010R0001	0.27	1
	25	436490	S801HV-K25	2CCF019011R0001	0.27	1
	32	436605	S801HV-K32	2CCF019012R0001	0.27	1
	40	436612	S801HV-K40	2CCF019013R0001	0.27	1
	50	436629	S801HV-K50	2CCF019014R0001	0.27	1
	63	436636	S801HV-K63	2CCF019015R0001	0.27	1
	80	436643	S801HV-K80	2CCF019016R0001	0.27	1
	100	436650	S801HV-K100	2CCF019017R0001	0.27	1
	125	436667	S801HV-K125	2CCF019018R0001	0.27	1
2	0.5	502461	S802HV-K0,5	2CCF030025R0001	0.54	1
	1	502478	S802HV-K1	2CCF030026R0001	0.54	1
	1.6	502638	S802HV-K1,6	2CCF030032R0001	0.54	1
	2	502485	S802HV-K2	2CCF030027R0001	0.54	1
	2.5	502492	S802HV-K2,5	2CCF030028R0001	0.54	1
	3	502645	S802HV-K3	2CCF030033R0001	0.54	1
	4	501297	S802HV-K4	2CCF020063R0001	0.54	1
	5	501303	S802HV-K5	2CCF020064R0001	0.54	1
	6	436674	S802HV-K6	2CCF019019R0001	0.54	1
	8	436681	S802HV-K8	2CCF019020R0001	0.54	1
	10	436698	S802HV-K10	2CCF019021R0001	0.54	1
	13	436704	S802HV-K13	2CCF019022R0001	0.54	1
	16	436711	S802HV-K16	2CCF019023R0001	0.54	1
	20	436728	S802HV-K20	2CCF019024R0001	0.54	1
	25	436742	S802HV-K25	2CCF019025R0001	0.54	1
	32	436759	S802HV-K32	2CCF019026R0001	0.54	1
	40	436766	S802HV-K40	2CCF019027R0001	0.54	1
	50	436773	S802HV-K50	2CCF019028R0001	0.54	1
	63	436780	S802HV-K63	2CCF019029R0001	0.54	1
	80	436797	S802HV-K80	2CCF019030R0001	0.54	1
	100	436803	S802HV-K100	2CCF019031R0001	0.54	1
	125	436810	S802HV-K125	2CCF019032R0001	0.54	1

High performance MCBs

S800HV series for application up to 1000V AC

803HV

Number of poles	Rated current [A]	GTIN EAN 76122714	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
3	0.5	501310	S803HV-K0,5	2CCF020065R0001	0.81	1
	1	501327	S803HV-K1	2CCF020066R0001	0.81	1
	1.6	501334	S803HV-K1,6	2CCF020067R0001	0.81	1
	2	501341	S803HV-K2	2CCF020068R0001	0.81	1
	2.5	501358	S803HV-K2,5	2CCF020069R0001	0.81	1
	3	501365	S803HV-K3	2CCF020070R0001	0.81	1
	4	501372	S803HV-K4	2CCF020071R0001	0.81	1
	5	501389	S803HV-K5	2CCF020072R0001	0.81	1
	6	36827	S803HV-K6	2CCF019033R0001	0.81	1
	8	36834	S803HV-K8	2CCF019034R0001	0.81	1
	10	36841	S803HV-K10	2CCF019035R0001	0.81	1
	13	36858	S803HV-K13	2CCF019036R0001	0.81	1
	16	36865	S803HV-K16	2CCF019037R0001	0.81	1
	20	36872	S803HV-K20	2CCF019038R0001	0.81	1
	25	36889	S803HV-K25	2CCF019039R0001	0.81	1
	32	36896	S803HV-K32	2CCF019040R0001	0.81	1
	40	36902	S803HV-K40	2CCF019041R0001	0.81	1
	50	36919	S803HV-K50	2CCF019042R0001	0.81	1
	63	36926	S803HV-K63	2CCF019043R0001	0.81	1
	80	36933	S803HV-K80	2CCF019044R0001	0.81	1
	100	36940	S803HV-K100	2CCF019045R0001	0.81	1
	125	36957	S803HV-K125	2CCF019046R0001	0.81	1

S800HV-C characteristics

Function: protection and control of the circuits against overloads and short-circuits. With increased voltage level 580/1000 VAC, it is ideal for installation in AC side of high-power conversion systems (PCS) in photovoltaic and wind turbine installations.

Applications: Industrial, high-power conversion systems

Standard: IEC/EN 60947-2

Icu = 4 kA

S803HV

Number of poles	Rated current [A]	Bbn 7612271 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
			Type code	Order code			
3	10	72221	S803HV-C10	2CCF019650R0001		0.81	1
3	32	72245	S803HV-C32	2CCF019651R0001		0.81	1

High performance MCBs

S800U series technical features

		S800U
General Data		
Tripping characteristics		K, Z
Standards		UL489
Number of poles		1 ... 4
Rated current I_e	A	10...100
Rated frequency f	Hz	50/60
Rated insulation voltage U_i acc. to IEC/EN 60664-1	V	AC 690
Rated impulse withstand voltage $U_{imp.}$ (1.2/50 µs)	kV	8
Dielectric test voltage at ind. freq. for 1 min.	kV	2.4
Overvoltage category		IV
Pollution degree		3
Suitability for isolation		yes
Data acc. to IEC/EN 60947-2 (based on internal test only)		
Rated operational voltage U_e	V	AC 240/415
Min. operating voltage	V	AC 12
Rated ultimate short-circuit capacity I_{cu}	kA	AC 240 V (1-pole) = 30 kA AC 415 V (multipole) = 50 kA
Rated service short-circuit capacity I_{cs}	kA	AC 240 V (1-pole) = 25 kA AC 415 V (multipole) = 40 kA
Reference temperature for tripping characteristics	°C	25 °C
Electrical and Mechanical Endurance	cycle (OFF-ON-OFF)	10...32 A: 10000 electrical / 10000 mechanical 40...100 A: 6000 electrical / 10000 mechanical
Data acc. to UL / CSA		
Rated voltage	V	AC 240
Stand-alone interrupting rating acc. to UL 489	kA	AC 240 V (1-pole) = 30 kA AC 240 V (multipole) = 50 kA
Reference temperature for tripping characteristics		25 °C
Electrical and Mechanical endurance	cycle (OFF-ON-OFF)	acc. to UL489 6000 electrical; 4000 mechanical
Mechanical Data		
Protection degree acc. to EN 60529		IP20; IP40 (actuating end only)
Plastic classification acc. to UL94		V0
Resistance to shock acc. to IEC/EN 60068-2-27		5g / 30ms, Test Ea
Shock resistance acc. To IEC/EN 61373		5g / 30ms, Cat 1 / Class B
Resistance to Vibrations acc. to IEC 60068-2-6		5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	°C/RH	16 hours 70°C
Environmental condition (low temp) acc. to IEC/EN 60068-2-1		16 hours -40°C
Ambient temperature	°C	-25 ... +60
Storage temperature	°C	-40 ... +70
Installation		
Terminal type		Failsafe cage or ringlug terminal
Connections (top/bottom) – C_u only	mm^2	1 ... 50 flexible 1 ... 70 solid (rigid or stranded)
	AWG	10 - 30 A: 14 - 2 AWG 40 - 100 A: 1 - 8 AWG
Tightening torque	Nm	3.5
	in-lbs.	31
Wire stripping length	mm	19
Screwdriver		POZI 2
Mounting type		Any
Mounting position		Any
Supply from		Top and bottom
Dimensions and weight		
Pole dimensions (H x L x W)	mm	95 x 82.5 x 27
Pole weight	g	240

High performance MCBs

S804U-UCZ series technical features

		S804U-UCZ
General Data		
Tripping characteristics		UCZ
Standards		UL489
Number of poles		4
Rated current I_e	A	10 - 80
Rated frequency f	Hz	-
Rated insulation voltage U_i acc. to IEC/EN 60664-1	V	DC 1500
Rated impulse withstand voltage $U_{imp.}$ (1.2/50 µs)	kV	8
Dielectric test voltage at ind. freq. for 1 min.	kV	3
Overvoltage category		IV
Pollution degree		3
Suitability for isolation		yes
Data acc. to UL / CSA		
Rated voltage	V	DC 600
Stand-alone interrupting rating acc. to UL 489	kA	10
Reference temperature for tripping characteristics		25 °C
Electrical and Mechanical endurance	cycle (OFF-ON-OFF)	acc. to UL489 6000 electrical; 4000 mechanical
Mechanical Data		
Protection degree acc. to EN 60529		IP20; IP40 (actuating end only)
Plastic classification acc. to UL94		V0
Resistance to shock acc. to IEC/EN 60068-2-27		5g / 30ms, Test Ea
Resistance to Vibrations acc. to IEC 60068-2-6		5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	°C/RH	16 hours 70°C
Environmental condition (low temp) acc. to IEC/EN 60068-2-1	°C/RH	16 hours -40°C
Ambient temperature	°C	- 25 ... +60
Storage temperature	°C	- 40 ... +70
Installation		
Terminal type		Failsafe cage terminal
Connections C_u (top/bottom)	AWG	10 - 32 A: 14-2 AWG 40 - 80 A: 1-8 AWG
Tightening torque	Nm	3.5
	in-lbs.	31
Wire stripping length	mm	19
Screwdriver		POZI 2
Mounting type		Any
Mounting position		Any
Supply from		Top and bottom
Dimensions and weight		
Pole dimensions (H x L x W)	mm	142 x 82.5 x 27
Pole weight	g	240

High performance MCBs

S804U-PVS / S804U-PVSP series technical features

		S804U-PVS / S804U-PVSP
General Data		
Tripping characteristics		S, SP
Standards		UL489B (Photovoltaic): S804U-PVS: UL Listed S804U-PVSP: UL Recognized
Number of poles		4
Rated current I_e	A	5
Rated frequency f	Hz	-
Rated insulation voltage U_i acc. to IEC/EN 60664-1	V	DC 1500
Rated impulse withstand voltage $U_{imp.}$ (1.2/50 µs)	kV	8
Dielectric test voltage at ind. freq. for 1 min.	kV	3
Overvoltage category		III
Pollution degree		2
Suitability for isolation		yes
Data acc. to UL / CSA		
Rated voltage	V	S804U-PVS = DC 1000 S804U-PVSP = DC 1500
Stand-alone interrupting rating acc. to UL 489	kA	3 kA
Reference temperature for tripping characteristics		50 °C
Electrical and Mechanical endurance	cycle (OFF-ON-OFF)	acc. to UL489B S804U-PVS: 1000 electrical; 1000 mechanical S804U-PVSP: 300 electrical; 1000 mechanical
Mechanical Data		
Protection degree acc. to EN 60529		IP20; IP40 (actuating end only)
Plastic classification acc. to UL94		V0
Resistance to shock acc. to IEC/EN 60068-2-27		5g / 30ms, Test Ea
Resistance to Vibrations acc. to IEC 60068-2-6		5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e, Test Fc
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	°C/RH	2 cycles: 12h 55°C @98% rh; 12h 25°C @93% rh
Environmental condition (dry heat) acc. to IEC/EN 60068-2-2	°C/RH	16 hours 70°C
Environmental condition (low temp) acc. to IEC/EN 60068-2-1	°C/RH	16 hours -40°C
Ambient temperature	°C	-25 … +60
Storage temperature	°C	-40 … +70
Installation		
Terminal type		Failsafe cage terminal
Connections (top/bottom) – C_u only	mm^2	1 … 50 flexible 1 … 70 solid (rigid or stranded)
	AWG	14 AWG - 2 AWG Single conductor per terminal, 75C wire
Flexible Cross-section of conductors (top/bottom)	mm^2	-
	AWG	14 AWG - 2 AWG Single conductor per terminal - copper only, 75C wire
Tightening torque	Nm	3.5
	in-lbs.	31
Wire stripping length	**mm**	**19**
Screwdriver		POZI 2
Mounting type		Any
Mounting position		Any
Supply from		Top and bottom
Dimensions and weight		
Pole dimensions (H x L x W)	mm	142 x 82.5 x 27
Pole weight	g	240

High performance MCBs

S800U series technical features

		S800U	S804U-UCZ	S804U-PVS / S804U-PVSP
Combination with aux. elements	S800-AUX	yes	yes	yes
	S800-AUX/ALT	yes	yes	yes
	S800W-RSU	yes	yes	yes
	S800-SOR	yes	yes	yes
	S800-UVR	yes	yes	yes

High performance MCBs

S800U series with cage terminal, Z characteristic

S801U

S802U

S803U

S804U

S800U-Z characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: UL489, CSA 22.2 NO.5-02

Interrupting rating=30 kA (1 pole), 50kA (2...4 poles)

Number of poles	Rated current [A]	GTIN EAN 76122712	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	10	14487	S801U-Z10	2CCS881017R0105	0.25	1
	15	14524	S801U-Z15	2CCS881017R0155	0.25	1
	20	14562	S801U-Z20	2CCS881017R0205	0.25	1
	25	14609	S801U-Z25	2CCS881017R0255	0.25	1
	30	14647	S801U-Z30	2CCS881017R0305	0.25	1
	40	14685	S801U-Z40	2CCS881017R0405	0.25	1
	50	14722	S801U-Z50	2CCS881017R0505	0.25	1
	60	14760	S801U-Z60	2CCS881017R0605	0.25	1
	70	14807	S801U-Z70	2CCS881017R0705	0.25	1
	80	14845	S801U-Z80	2CCS881017R0805	0.25	1
	90	14883	S801U-Z90	2CCS881017R0905	0.25	1
	100	14920	S801U-Z100	2CCS881017R0825	0.25	1
2	10	14494	S802U-Z10	2CCS862017R0105	0.49	1
	15	14531	S802U-Z15	2CCS862017R0155	0.49	1
	20	14579	S802U-Z20	2CCS862017R0205	0.49	1
	25	14616	S802U-Z25	2CCS862017R0255	0.49	1
	30	14654	S802U-Z30	2CCS862017R0305	0.49	1
	40	14692	S802U-Z40	2CCS862017R0405	0.49	1
	50	14739	S802U-Z50	2CCS862017R0505	0.49	1
	60	14777	S802U-Z60	2CCS862017R0605	0.49	1
	70	14814	S802U-Z70	2CCS862017R0705	0.49	1
	80	14852	S802U-Z80	2CCS862017R0805	0.49	1
	90	14890	S802U-Z90	2CCS862017R0905	0.49	1
	100	14937	S802U-Z100	2CCS862017R0825	0.49	1
3	10	14500	S803U-Z10	2CCS863017R0105	0.74	1
	15	14548	S803U-Z15	2CCS863017R0155	0.74	1
	20	14586	S803U-Z20	2CCS863017R0205	0.74	1
	25	14623	S803U-Z25	2CCS863017R0255	0.74	1
	30	14661	S803U-Z30	2CCS863017R0305	0.74	1
	40	14708	S803U-Z40	2CCS863017R0405	0.74	1
	50	14746	S803U-Z50	2CCS863017R0505	0.74	1
	60	14784	S803U-Z60	2CCS863017R0605	0.74	1
	70	14821	S803U-Z70	2CCS863017R0705	0.74	1
	80	14869	S803U-Z80	2CCS863017R0805	0.74	1
	90	14906	S803U-Z90	2CCS863017R0905	0.74	1
	100	14944	S803U-Z100	2CCS863017R0825	0.74	1
4	10	14517	S804U-Z10	2CCS864017R0105	0.98	1
	15	14555	S804U-Z15	2CCS864017R0155	0.98	1
	20	14593	S804U-Z20	2CCS864017R0205	0.98	1
	25	14630	S804U-Z25	2CCS864017R0255	0.98	1
	30	14678	S804U-Z30	2CCS864017R0305	0.98	1
	40	14715	S804U-Z40	2CCS864017R0405	0.98	1
	50	14753	S804U-Z50	2CCS864017R0505	0.98	1
	60	14791	S804U-Z60	2CCS864017R0605	0.98	1
	70	14838	S804U-Z70	2CCS864017R0705	0.98	1
	80	14876	S804U-Z80	2CCS864017R0805	0.98	1
	90	14913	S804U-Z90	2CCS864017R0905	0.98	1
	100	14951	S804U-Z100	2CCS864017R0825	0.98	1

High performance MCBs

S800U series with cage terminal, K characteristic

S801U

S802U

S803U

S804U

S800U-K characteristic

Function: protection and control of the circuits against overloads and short-circuits when a high breaking capacity is required; protection for people and big length cables in TN and IT systems; very useful when selectivity is needed vs an MCCB or back-up vs other MCBs wired downstream.

Applications: commercial and industrial.

Standard: UL489, CSA 22.2 NO.5-02

Interrupting rating=30 kA (1-pole), 50kA (2...4-pole)

Number of poles	Rated current [A]	GTIN EAN 76122712	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
1	10	14005	S801U-K10	2CCS881017R0427	0.25	1
	15	14043	S801U-K15	2CCS881017R0457	0.25	1
	20	14081	S801U-K20	2CCS881017R0487	0.25	1
	25	14128	S801U-K25	2CCS881017R0517	0.25	1
	30	14166	S801U-K30	2CCS881017R0527	0.25	1
	40	14203	S801U-K40	2CCS881017R0557	0.25	1
	50	14241	S801U-K50	2CCS881017R0577	0.25	1
	60	14289	S801U-K60	2CCS881017R0587	0.25	1
	70	14326	S801U-K70	2CCS881017R0707	0.25	1
	80	14364	S801U-K80	2CCS881017R0627	0.25	1
	90	14401	S801U-K90	2CCS881017R0907	0.25	1
	100	14449	S801U-K100	2CCS881017R0637	0.25	1
2	10	14012	S802U-K10	2CCS862017R0427	0.49	1
	15	14050	S802U-K15	2CCS862017R0457	0.49	1
	20	14098	S802U-K20	2CCS862017R0487	0.49	1
	25	14135	S802U-K25	2CCS862017R0517	0.49	1
	30	14173	S802U-K30	2CCS862017R0527	0.49	1
	40	14210	S802U-K40	2CCS862017R0557	0.49	1
	50	14258	S802U-K50	2CCS862017R0577	0.49	1
	60	14296	S802U-K60	2CCS862017R0587	0.49	1
	70	14333	S802U-K70	2CCS862017R0707	0.49	1
	80	14371	S802U-K80	2CCS862017R0627	0.49	1
	90	14418	S802U-K90	2CCS862017R0907	0.49	1
	100	14456	S802U-K100	2CCS862017R0637	0.49	1
3	10	14029	S803U-K10	2CCS863017R0427	0.74	1
	15	14067	S803U-K15	2CCS863017R0457	0.74	1
	20	14104	S803U-K20	2CCS863017R0487	0.74	1
	25	14142	S803U-K25	2CCS863017R0517	0.74	1
	30	14180	S803U-K30	2CCS863017R0527	0.74	1
	40	14227	S803U-K40	2CCS863017R0557	0.74	1
	50	14265	S803U-K50	2CCS863017R0577	0.74	1
	60	14302	S803U-K60	2CCS863017R0587	0.74	1
	70	14340	S803U-K70	2CCS863017R0707	0.74	1
	80	14388	S803U-K80	2CCS863017R0627	0.74	1
	90	14425	S803U-K90	2CCS863017R0907	0.74	1
	100	14463	S803U-K100	2CCS863017R0637	0.74	1
4	10	14036	S804U-K10	2CCS864017R0427	0.98	1
	15	14074	S804U-K15	2CCS864017R0457	0.98	1
	20	14111	S804U-K20	2CCS864017R0487	0.98	1
	25	14159	S804U-K25	2CCS864017R0517	0.98	1
	30	14197	S804U-K30	2CCS864017R0527	0.98	1
	40	14234	S804U-K40	2CCS864017R0557	0.98	1
	50	14272	S804U-K50	2CCS864017R0577	0.98	1
	60	14319	S804U-K60	2CCS864017R0587	0.98	1
	70	14357	S804U-K70	2CCS864017R0707	0.98	1
	80	14395	S804U-K80	2CCS864017R0627	0.98	1
	90	14432	S804U-K90	2CCS864017R0907	0.98	1
	100	14470	S804U-K100	2CCS864017R0637	0.98	1

High performance MCBs

S800U series UCZ characteristic

S800 UCZ characteristic
Function: Non polarized MCB for direct current applications up to 600 VDC, providing protection and control of the circuits against overloads and short-circuits
Application: commercial and industrial in direct current
Standard: UL 489
Interrupting rating: 10 kA

S804U-UCZ

Number of poles	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
			Type Code	Order code		
4	10	420703	S804U-UCZ10	2CCS248356R0001	0.98	1
	15	420710	S804U-UCZ15	2CCS248357R0001	0.98	1
	20	420727	S804U-UCZ20	2CCS248358R0001	0.98	1
	25	420734	S804U-UCZ25	2CCS248359R0001	0.98	1
	30	420741	S804U-UCZ30	2CCS248360R0001	0.98	1
	40	420758	S804U-UCZ40	2CCS248361R0001	0.98	1
	50	420765	S804U-UCZ50	2CCS248362R0001	0.98	1
	60	420772	S804U-UCZ60	2CCS248363R0001	0.98	1
	70	420789	S804U-UCZ70	2CCS248364R0001	0.98	1
	80	420796	S804U-UCZ80	2CCS248365R0001	0.98	1

High performance MCBs

S800U series PVS / PVSP characteristic

S804U-PVS

S800U-PVS / S800U-PVSP characteristic - Ground fault detector interrupter (GFDI)
Function: Non polarized MCB for direct current applications suitable for string protection in photovoltaic systems, providing protection and control of the strings against overloads, short-circuits and reverse currents.
Application: photovoltaic
Standard: UL 489B
Interrupting rating: 3 kA

Number of poles	I_{cu} [kA]	Rated current [A]	GTIN EAN 7612271	Order details		Weight [kg]	Pack. unit
				Type Code	Order code		
4	3	5	419929	S804U-PVS5	2CCP824017R1159	0.98	1
4	3	5	468866	S804U-PVSP5	2CCF019592R0001	0.98	1

RESIDUAL CURRENT DEVICES

Electrical installation solutions for buildings
Residual current devices

Index

Quick selection of RCDs for household and industrial applications	2

RCCBs

F 200	6
F 200 for overseas markets	12
F 200 left neutral	14
F 200 AP-R (high immunity)	18
F 200 110V	20
F 200 for high frequency and railways applications	21
F 200 F type	22
F 200 series - B	24
F-ATI and F-ARI	30

RCD-blocks

DDA 200	34
DDA 200 special version 110 V and 400 V	42
DDA 200 AP-R (high immunity)	43
DDA 200 AE (for emergency stop)	44
DDA 200 selective	45
DDA 800	50
DDA 800 AC type for MCBs S800	52
DDA 800 A type AP-R (high immunity) for MCBs S800	54
DDA 800 A type selective for MCBs S800	55

RCBOs

DS201	56
DS201L	62
DS201	64
DS201M	70
DS201M 110V	77
DS201T	78
DS201 UL	83
DS301C	86
DS301C T	94
DS202CR	95
DS202CR M	99
DS202CR M 110V	103
DS203NC	104
DS203NC L	108
DS 200	118
DS 200M	127
DS800P	133

eRCBOs

DSE201	142
DSE201M	148
DSE203 M / DSE203N M / DSE203NS M	152
DSN201E	162
DSE201 NS	166

Residual current relays

RD2	171
RD3	172
ELR front panel residual current relays	173
TR toroidal transformers	175

System pro M compact®
Quick selection of RCDs for household and industrial applications

Easy! Find the right range and the corresponding catalogue page at a glance using this selection chart.

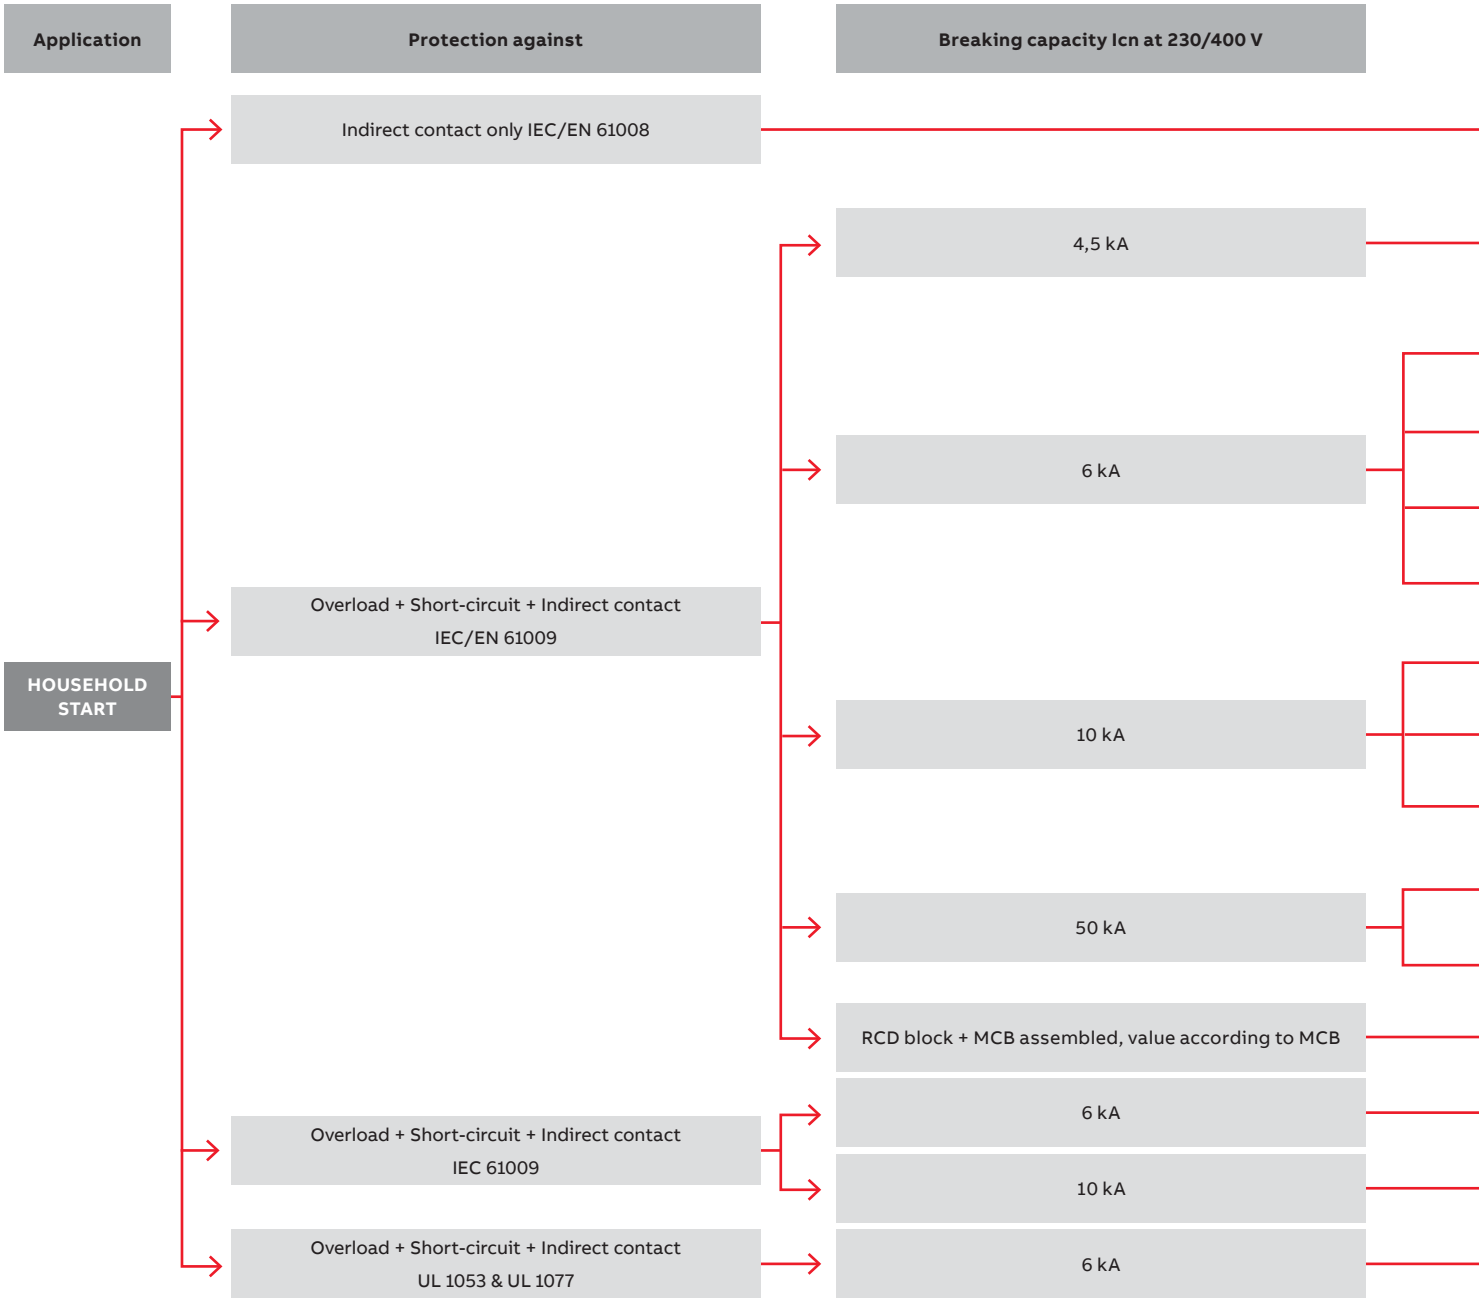

System pro M compact®

Quick selection of RCDs for household and industrial applications

Rated current	Remark	Poles	Solution
Up to 125 A		All poles	F200
Up to 32 A		1P+N	F200
		3P+N	DS203NC
32 A	Reduced size	3P+N	DS203NC
Up to 40 A	Reduced size	2P	DS202CR
Up to 40 A	Reduced size	1P+N	DS201
Up to 63 A	Standard size	All poles	DS 200
Up to 40 A	Reduced size	2P	DS202CR M
Up to 40 A	Reduced size	1P+N	DS201 M DS301C
Up to 40 A	Reduced size	1P+N	DSX301C
Up to 63 A	Standard size	All poles	DS 200 M
Up to 125 A		All poles	DS800P
Up to 63 A	RCD: IEC/EN 61009 Ann. G	All poles	DDA 200 + S200
Up to 50 A	Voltage dependent	1P+N	DSE201
Up to 50 A	Voltage dependent	1P+N	DSE201 M
Up to 25 A	Reduced size	1P+N	DS201 UL

System pro M compact®
Quick selection of RCDs for household and industrial applications

Easy! Find the right range and the corresponding catalogue page at a glance using this selection chart.

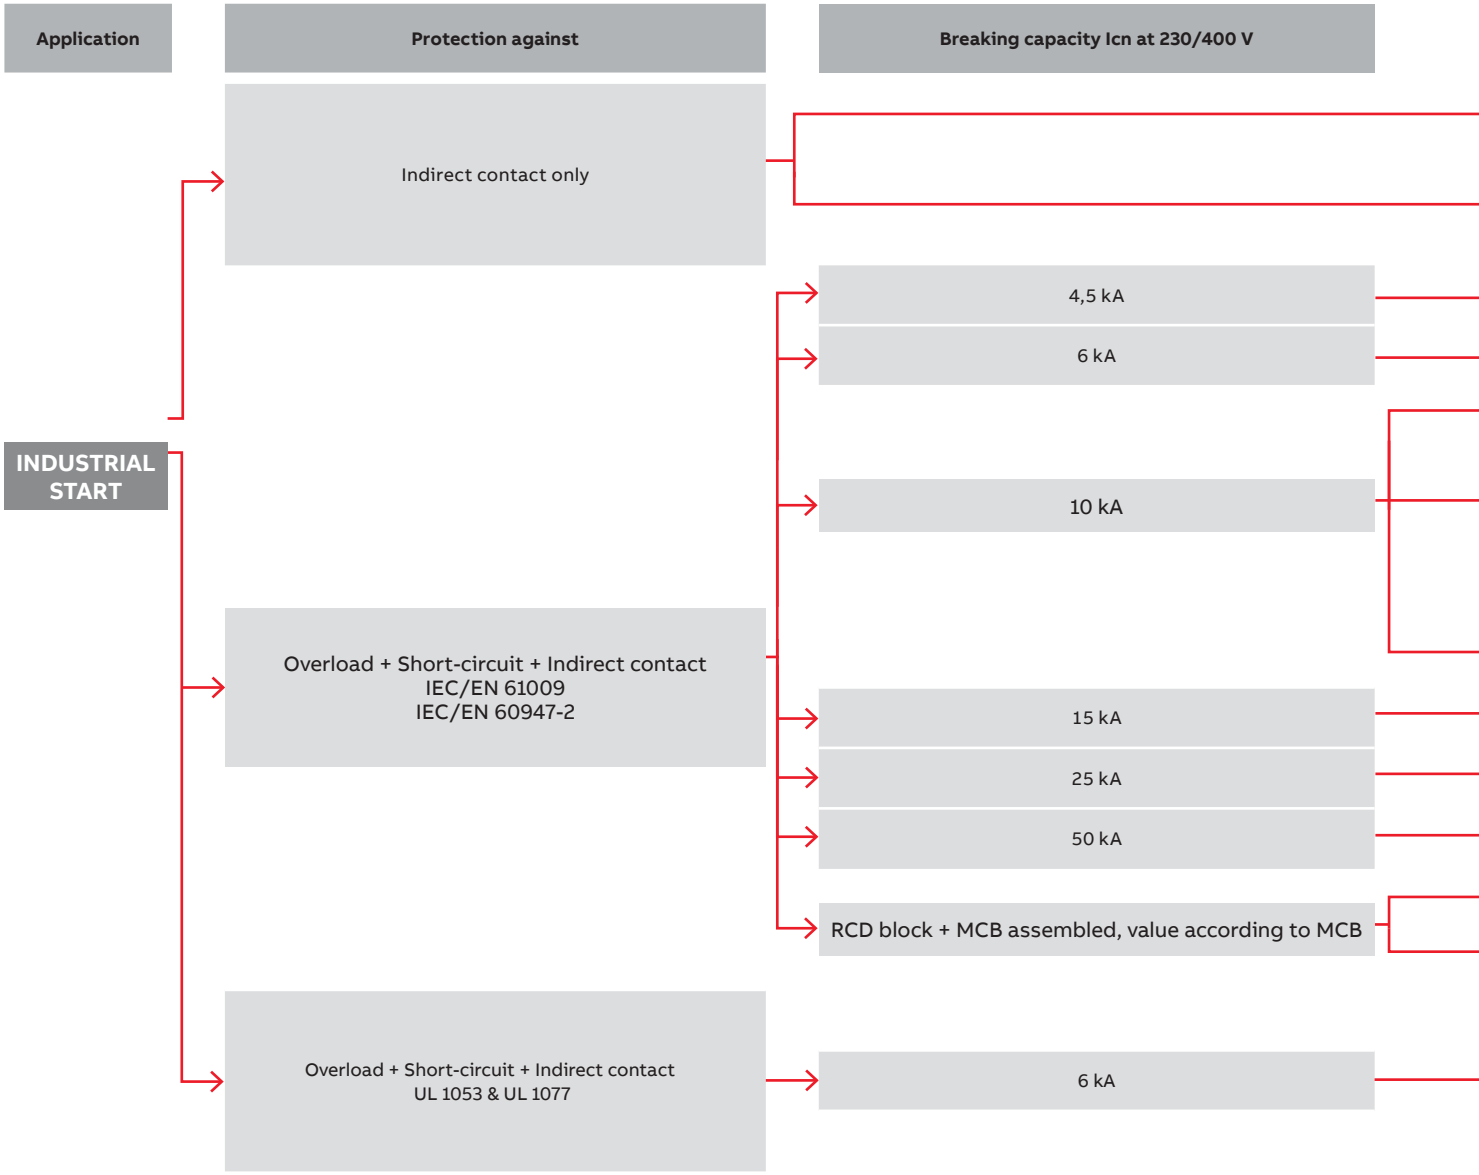

System pro M compact®

Quick selection of RCDs for household and industrial applications

Rated current	Remark	Poles	Solution
Up to 125 A	IEC/EN 61008	All poles	F200
According to MCB	IEC/EN 60947-2 Ann. M	All poles	RD3
32 A		1P+N	DS201 L DS301C L
Up to 32 A		1P+N	DS201 DS301C
Up to 40 A		2P	DS202CR, DS202CR M
Up to 40 A		1P+N	DS201 M
Up to 63 A		All poles	DS 200
Up to 63 A		All poles	DS 200 M
Up to 100 A		All poles	DDA 800
Up to 125 A		All poles	DS800P
Up to 63 A	RCD: IEC/EN 61009 Ann. G	All poles	DDA 200 + S200
Up to 100 A	RCD: IEC/EN 60947-2 Ann. B	All poles	DDA 800 + S800
Up to 25 A	Reduced size	1P+N	DS201 UL

RCCB F 200
The details make the difference
A range designed to ensure efficiency and protection

Bi-directional cylindrical terminal ensure higher safety of connecting operations, making them easier.

Test pushbutton to verify the correct functioning of the device.

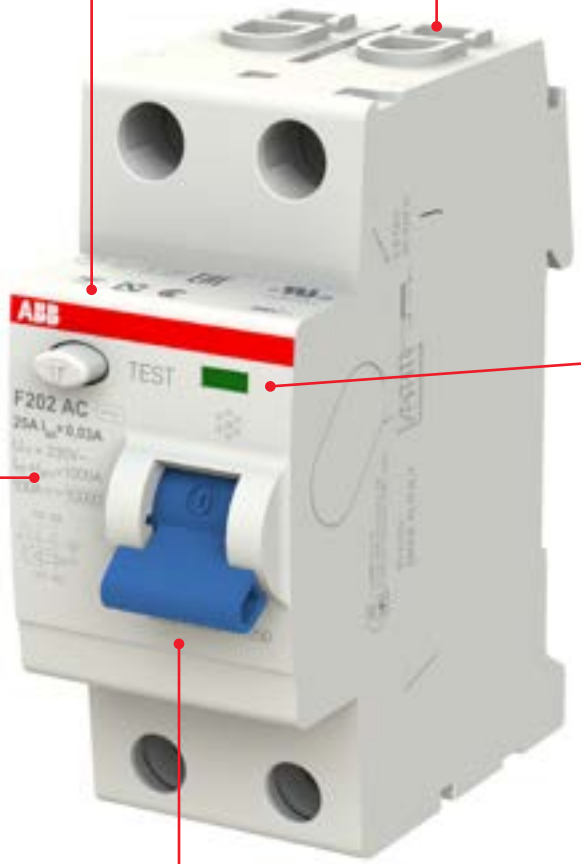

Contact position indicator (CPI): to always know the status of the contacts (red: closed contacts; green: open contacts) independently on the toggle position.

Information on the device are laser printed to make them clearly visible and long lasting.

Laser-marked order code on the front to make easier future orders.

Two terminals are available, the fore one for cables up to 25 mm², the back one for cables up to 10 mm² or for busbars.

RCCBs F200 can be used in ambient conditions where the temperature of the surrounding atmosphere has values between -25 °C (snowflake laser printed on the front of the device) and +55 °C.

The availability of two terminals offers different connection solutions thanks to the possibility to connect two independent cables in the same device: the second terminal can be used for an auxiliary circuit or for the supply of devices with small section cables without connecting them together with the main circuit.

All the safety ensured by the international marks: approvals' marking in a visible area, even if RCDs is installed and with the panel-door closed.

High performances:

- rated breaking capacity and rated residual breaking capacity laser printed on the device: Im=IΔm= 1000 A
- coordination with a 100 A rated current SCPD (short-circuit protective device) = 10 000 A.

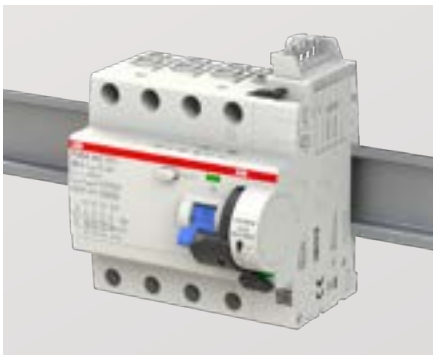

The F200 can be paired with the S3C-MOD motor operating device and the F3C-AR230 or F3C-AR230 C auto-reclosing units to ensure continuous power supply and maintain service continuity throughout your home. Additionally, the eMOD/AR ModBus communication module allows full integration with the InSite energy management system, enabling users to monitor and remotely control connected devices.

RCCBs

F200 technical features

Standards			
Electrical features	Type (wave form of the earth leakage sensed)		
	Number of poles		
	Rated current In		A
	Rated sensitivity IΔn		A
	Rated operational voltage U_e	IEC	V
		UL/CSA	V
	Rated Insulation voltage U_i acc. to IEC/EN 60664-1		V
	Operating voltage of circuit test Ut	IEC	V
		UL/CSA	V
	Rated frequency f		Hz
	Rated conditional short-circuit current Inc=IΔ③	SCPD - fuse gG 100 A	kA
	Rated residual breaking capacity IΔm=Im		kA
	Grid distance		mm
	Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)		kV
	Dielectric test voltage at ind. freq. for 1 min.		kV
	Overvoltage category		
	Pollution degree		
	Surge current resistance (wave 8/20)		A
Mechanical features	Housing Type		
	Toggle Type		
	Contact position indicator (CPI)		
	Electrical endurance		cycles (OFF-ON-OFF)
	Mechanical endurance		cycles (OFF-ON-OFF)
	Protection degree	housing	
		terminals	
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH
	Resistance to Shock acc. to IEC 60068-2-27		
	Resistance to Vibrations acc. to IEC 60068-2-6		
	Ambient temperature (with daily average ≤ +35 °C)	IEC	°C
	Storage temperature		°C
Installation	Terminal type		
	Cross-section of conductors	IEC (top / bottom)	mm^2
		UL/CSA (top / bottom)	AWG
	Cross-section of busbars	IEC (top / bottom)	mm^2
		UL/CSA (top / bottom)	AWG
	Tightening torque	IEC	Nm
		UL/CSA	in-lbs.
	Wire Stripping Length		
	Screwdriver		
	Mounting Type		
	Mounting position		
	Supply from		
Dimensions and weight	Dimensions (H x D x W)	2P	mm
		4P	mm
	Weight	2P	g
		4P	g
Combination with auxiliary elements	Combinable with:	auxiliary contact	
		signal contact/auxiliary switch	
		shunt trip	
		undervoltage release	

① Ground-fault sensing and relaying equipment-component (up to 63 A)
② prior to connection of aluminium conductors (≥ 4 mm^2) ensure that their contact points are cleaned, brushed and coated with grease
③ S750-E 63A, S750DR-E/K 63A and other SCPD coordination values see Chapter 3 of Solutions for electrical distribution in buildings - technical details
④ F200 left neutral has not the UL certification and the UL mark
⑤ Only for versions with marking according to EN 61008-1
⑥ Neutral conductor can be wired anywhere for 2P devices

RCCBs

F200 technical features

F200 AC	F200 A	F200 A AP-R	F200 A S	F200 A 110V	F200 A 400 Hz	F200 A 16 2/3 Hz	F200 F
IEC/EN 61008-1; IEC/EN 61008-2-1; UL 1053 ①				IEC 61008-1; IEC/EN 61008-2-1; UL 1053	IEC/EN 61008-1; IEC/EN 61008-2-1	IEC/EN 61008-1; IEC/EN 61008-2-1;	IEC/EN 61008-1; IEC/EN 61008-2-1; IEC/EN 62423 2nd ed
AC	A	A	A	A	A	A	F
2P ⑥, 4P (for 125 A only 4P)				2P, 4P	4P	2P, 4P	2P, 4P
16, 25, 40, 63, 80, 100, 125		25, 40, 63, 80, 100, 125	40, 63, 80, 100, 125	25, 40, 63, 80, 100	25, 40	63	25, 40, 63
0.01-0.03-0.1-0.3-0.5		0.03	0.1-0.3-0.5-1	0.03	0.03	0.03-0.3-0.5	0.03
230/400 - 240/415							
480/277 (up to 100 A)				-	-		-
500							
In ≤ 100; Right neutral: 110 (170 for 30mA) - 254 ⑤; Left neutral: 195 (300 for 30 mA) - 440 ⑤ In = 125 A; Right neutral: 100 (150 for 30 mA) - 250 ⑤; Left neutral: 200 (250 for 30 mA) - 440				110-254	170-254	110 (170 for 30 mA) - 254	170/254
In ≤ 100; Right neutral: 110 (170 for 30mA)- 277; Left neutral: 195 (300 for 30mA) - 480 ④					-		-
50/60					50/400	16 2/3	50/60
10 (for 125 A fuse is gG 125 A)							10
1 (1.25 for 125 A)							1
35							
4							
2.5							
III, disconnector abilities							-
2							
NA		3000	5000	NA	NA	NA	3000
RAL 7035							
RAL 5015							
yes							
10000 (2000 for 125 A)				10000	10000	10000	10000
20000 (5000 for 125 A)				20000	20000	20000	20000
IP40							
IP20							
28 cycles with 55°C/90-96% and 25°C/95-100%							
25g - 2 shocks - 13ms							
0,1 mm or 1 g - 20 cycles at 5...150...5 Hz							
-25...+55 (-25...+40 for 125 A)				-25...+55	-25...+55	-25...+55	-25...+55
-40...+70							
failsafe bi-directional cylinder-lift terminal at top and bottom (shock protected) (cage for In > 63 A) ②							
25/25 (35/35 single slot terminal for In > 63 A)					25/25	25/25	25/25
18-4 (up to 63 A)				-	-	-	-
10/10 (not for In = 80-100 A)					10/10	10/10	10/10
18-8 (up to 63 A)				-	-	-	-
2.8 (3 for In = 125 A)				2.8	2.8	2.8	2.8
25 (up to 63 A)				-	-	-	-
12 mm (for In=80-100 A 12,7 mm Top terminals and 14,9 mm Bottom terminals)							
Nr. 2 Pozidriv							
on DIN rail EN 60715 (35 mm) by means of fast clip device							
Any							
from top and bottom							
85 x 69 x 35					-	-	85 x 69 x 35
85 x 69 x 70 (85 x 69.5 x 72 for 125 A)					85 x 69 x 70	85 x 69 x 70	85 x 69 x 70
200					-	-	225
360 (380 for In = 80 and 100 A and 500 for In = 125A)					360	360	375
yes (no for 125 A)					yes	yes	yes
yes					yes	yes	yes
yes (no for 125 A)					yes	yes	yes
yes (no for 125 A)					yes	yes	yes

RCCBs

F 200 series AC ⏦ type

F202

F 200 AC type
Function: protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61008-1; IEC/EN 61008-2-1
Marking: according to EN 61008-1; EN 61008-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	10	16	779902	F202 AC-16/0.01	2CSF202001R0160		0.200	1/6
		25	738022	F202 AC-25/0.01	2CSF202001R0250		0.200	1/6
	30	25	780007	F202 AC-25/0.03	2CSF202001R1250		0.200	1/6
		40	780106	F202 AC-40/0.03	2CSF202001R1400		0.200	1/6
		63	780205	F202 AC-63/0.03	2CSF202001R1630		0.200	1/6
		80	914204	F202 AC-80/0.03	2CSF202001R1800		0.200	1/6
		100	914303	F202 AC-100/0.03	2CSF202001R1900		0.200	1/6
	100	25	780304	F202 AC-25/0.1	2CSF202001R2250		0.200	1/6
		40	780403	F202 AC-40/0.1	2CSF202001R2400		0.200	1/6
		63	780502	F202 AC-63/0.1	2CSF202001R2630		0.200	1/6
		80	914402	F202 AC-80/0.1	2CSF202001R2800		0.200	1/6
		100	914501	F202 AC-100/0.1	2CSF202001R2900		0.200	1/6
	300	25	780601	F202 AC-25/0.3	2CSF202001R3250		0.200	1/6
		40	780700	F202 AC-40/0.3	2CSF202001R3400		0.200	1/6
		63	780809	F202 AC-63/0.3	2CSF202001R3630		0.200	1/6
		80	914600	F202 AC-80/0.3	2CSF202001R3800		0.200	1/6
		100	914709	F202 AC-100/0.3	2CSF202001R3900		0.200	1/6
	500	25	780908	F202 AC-25/0.5	2CSF202001R4250		0.200	1/6
		40	781004	F202 AC-40/0.5	2CSF202001R4400		0.200	1/6
		63	781103	F202 AC-63/0.5	2CSF202001R4630		0.200	1/6
		80	914808	F202 AC-80/0.5	2CSF202001R4800		0.200	1/6
		100	914907	F202 AC-100/0.5	2CSF202001R4900		0.200	1/6

RCCBs

F 200 series AC type

F204

F204 125 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	781202	F204 AC-25/0.03	2CSF204001R1250		0.360	1/3
		40	781301	F204 AC-40/0.03	2CSF204001R1400		0.360	1/3
		63	781400	F204 AC-63/0.03	2CSF204001R1630		0.360	1/3
		80	916604	F204 AC-80/0.03	2CSF204001R1800		0.405	1/3
		100	916703	F204 AC-100/0.03	2CSF204001R1900		0.405	1/3
		125	941507	F204 AC-125/0.03	2CSF204001R1950		0.500	1
	100	25	781509	F204 AC-25/0.1	2CSF204001R2250		0.360	1/3
		40	781608	F204 AC-40/0.1	2CSF204001R2400		0.360	1/3
		63	781707	F204 AC-63/0.1	2CSF204001R2630		0.360	1/3
		80	916802	F204 AC-80/0.1	2CSF204001R2800		0.405	1/3
		100	916901	F204 AC-100/0.1	2CSF204001R2900		0.405	1/3
		125	941606	F204 AC-125/0.1	2CSF204001R2950		0.500	1
	300	25	781806	F204 AC-25/0.3	2CSF204001R3250		0.360	1/3
		40	781905	F204 AC-40/0.3	2CSF204001R3400		0.360	1/3
		63	782001	F204 AC-63/0.3	2CSF204001R3630		0.360	1/3
		80	917007	F204 AC-80/0.3	2CSF204001R3800		0.405	1/3
		100	917106	F204 AC-100/0.3	2CSF204001R3900		0.405	1/3
		125	941705	F204 AC-125/0.3	2CSF204001R3950		0.500	1
	500	25	782100	F204 AC-25/0.5	2CSF204001R4250		0.360	1/3
		40	782209	F204 AC-40/0.5	2CSF204001R4400		0.360	1/3
		63	782308	F204 AC-63/0.5	2CSF204001R4630		0.360	1/3
		80	917205	F204 AC-80/0.5	2CSF204001R4800		0.405	1/3
		100	917304	F204 AC-100/0.5	2CSF204001R4900		0.405	1/3
		125	941804	F204 AC-125/0.5	2CSF204001R4950		0.500	1

RCCBs

F 200 series AC ⏦ type, for overseas markets

F202

F 200 AC type (for overseas markets)
Function: protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC 61008-1; IEC 61008-2-1;
Marking: according to IEC 61008-1; IEC 61008-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	10	16	814603	F202 AC-16/0.01	2CSF202005R0160		0.200	1/6
	30	25	814702	F202 AC-25/0.03	2CSF202005R1250		0.200	1/6
		40	814801	F202 AC-40/0.03	2CSF202005R1400		0.200	1/6
		63	814900	F202 AC-63/0.03	2CSF202005R1630		0.200	1/6
		80	935902	F202 AC-80/0.03	2CSF202005R1800		0.200	1/6
		100	936008	F202 AC-100/0.03	2CSF202005R1900		0.200	1/6
	100	25	815006	F202 AC-25/0.1	2CSF202005R2250		0.200	1/6
		40	815105	F202 AC-40/0.1	2CSF202005R2400		0.200	1/6
		63	815204	F202 AC-63/0.1	2CSF202005R2630		0.200	1/6
		80	936107	F202 AC-80/0.1	2CSF202005R2800		0.200	1/6
		100	936206	F202 AC-100/0.1	2CSF202005R2900		0.200	1/6
	300	25	815303	F202 AC-25/0.3	2CSF202005R3250		0.200	1/6
		40	815402	F202 AC-40/0.3	2CSF202005R3400		0.200	1/6
		63	815501	F202 AC-63/0.3	2CSF202005R3630		0.200	1/6
		80	936305	F202 AC-80/0.3	2CSF202005R3800		0.200	1/6
		100	936404	F202 AC-100/0.3	2CSF202005R3900		0.200	1/6
	500	25	883302	F202 AC-25/0.5	2CSF202005R4250		0.200	1/6
		40	883401	F202 AC-40/0.5	2CSF202005R4400		0.200	1/6
		63	883500	F202 AC-63/0.5	2CSF202005R4630		0.200	1/6
		80	936503	F202 AC-80/0.5	2CSF202005R4800		0.200	1/6
		100	936602	F202 AC-100/0.5	2CSF202005R4900		0.200	1/6

RCCBs

F 200 series AC ⏦ type, for overseas markets

F204

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	817109	F204 AC-25/0.03	2CSF204005R1250		0.360	1/3
		40	817208	F204 AC-40/0.03	2CSF204005R1400		0.360	1/3
		63	817307	F204 AC-63/0.03	2CSF204005R1630		0.360	1/3
		80	936701	F204 AC-80/0.03	2CSF204005R1800		0.405	1/3
		100	936800	F204 AC-100/0.03	2CSF204005R1900		0.405	1/3
	100	25	817406	F204 AC-25/0.1	2CSF204005R2250		0.360	1/3
		40	817505	F204 AC-40/0.1	2CSF204005R2400		0.360	1/3
		63	817604	F204 AC-63/0.1	2CSF204005R2630		0.360	1/3
		80	936909	F204 AC-80/0.1	2CSF204005R2800		0.405	1/3
		100	937005	F204 AC-100/0.1	2CSF204005R2900		0.405	1/3
	300	25	817703	F204 AC-25/0.3	2CSF204005R3250		0.360	1/3
		40	817802	F204 AC-40/0.3	2CSF204005R3400		0.360	1/3
		63	817901	F204 AC-63/0.3	2CSF204005R3630		0.360	1/3
		80	937104	F204 AC-80/0.3	2CSF204005R3800		0.405	1/3
		100	937203	F204 AC-100/0.3	2CSF204005R3900		0.405	1/3
	500	25	883609	F204 AC-25/0.5	2CSF204005R4250		0.360	1/3
		40	883609	F204 AC-40/0.5	2CSF204005R4400		0.360	1/3
		63	883807	F204 AC-63/0.5	2CSF204005R4630		0.360	1/3
		80	937302	F204 AC-80/0.5	2CSF204005R4800		0.405	1/3
		100	937401	F204 AC-100/0.5	2CSF204005R4900		0.405	1/3

RCCBs

F 200 series AC type left neutral

F204 left neutral

F204 left neutral 125 A

F 200 AC type with neutral pole on the left
Function: protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with In=30 mA). Product helpful where for installation habits, for wiring with busbars or cables, for special needs neutral on the left is needed.

Application: residential, commercial, industrial.
Standard: IEC/EN 61008-1; IEC/EN 61008-2-1
Marking: according to EN 61008-1; EN 61008-2-1

Number of poles	Rated residual current In mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	815907	F204 AC-25/0.03	2CSF204023R1250		0.360	1/3
		40	816003	F204 AC-40/0.03	2CSF204023R1400		0.360	1/3
		63	816102	F204 AC-63/0.03	2CSF204023R1630		0.360	1/3
		80	917403	F204 AC-80/0.03	2CSF204023R1800		0.405	1/3
		100	917502	F204 AC-100/0.03	2CSF204023R1900		0.405	1/3
		125	975106	F204 AC-125/0.03	2CSF204023R1950		0.500	1
	100	25	816201	F204 AC-25/0.1	2CSF204023R2250		0.360	1/3
		40	816300	F204 AC-40/0.1	2CSF204023R2400		0.360	1/3
		63	816409	F204 AC-63/0.1	2CSF204023R2630		0.360	1/3
	300	25	816508	F204 AC-25/0.3	2CSF204023R3250		0.360	1/3
		40	816607	F204 AC-40/0.3	2CSF204023R3400		0.360	1/3
		63	816706	F204 AC-63/0.3	2CSF204023R3630		0.360	1/3
		80	917601	F204 AC-80/0.3	2CSF204023R3800		0.405	1/3
		100	917700	F204 AC-100/0.3	2CSF204023R3900		0.405	1/3
		125	975304	F204 AC-125/0.3	2CSF204023R3950		0.500	1
	500	25	816805	F204 AC-25/0.5	2CSF204023R4250		0.360	1/3
		40	816904	F204 AC-40/0.5	2CSF204023R4400		0.360	1/3
		63	817000	F204 AC-63/0.5	2CSF204023R4630		0.360	1/3

RCCBs

F 200 series A type

F202

F 200 A type

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61008-1; IEC/EN 61008-2-1
Marking: according to EN 61008-1; EN 61008-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	10	16	782407	F202 A-16/0.01	2CSF202101R0160		0.200	1/6
	30	25	782506	F202 A-25/0.03	2CSF202101R1250		0.200	1/6
		40	782605	F202 A-40/0.03	2CSF202101R1400		0.200	1/6
		63	782704	F202 A-63/0.03	2CSF202101R1630		0.200	1/6
		80	915201	F202 A-80/0.03	2CSF202101R1800		0.200	1/6
		100	915300	F202 A-100/0.03	2CSF202101R1900		0.200	1/6
	100	25	786900	F202 A-25/0.1	2CSF202101R2250		0.200	1/6
		40	787006	F202 A-40/0.1	2CSF202101R2400		0.200	1/6
		63	787105	F202 A-63/0.1	2CSF202101R2630		0.200	1/6
		80	915409	F202 A-80/0.1	2CSF202101R2800		0.200	1/6
		100	915508	F202 A-100/0.1	2CSF202101R2900		0.200	1/6
	300	25	782803	F202 A-25/0.3	2CSF202101R3250		0.200	1/6
		40	782902	F202 A-40/0.3	2CSF202101R3400		0.200	1/6
		63	783008	F202 A-63/0.3	2CSF202101R3630		0.200	1/6
		80	915607	F202 A-80/0.3	2CSF202101R3800		0.200	1/6
		100	915706	F202 A-100/0.3	2CSF202101R3900		0.200	1/6
	500	25	783107	F202 A-25/0.5	2CSF202101R4250		0.200	1/6
		40	783206	F202 A-40/0.5	2CSF202101R4400		0.200	1/6
		63	783305	F202 A-63/0.5	2CSF202101R4630		0.200	1/6
		80	915805	F202 A-80/0.5	2CSF202101R4800		0.200	1/6
		100	915904	F202 A-100/0.5	2CSF202101R4900		0.200	1/6

RCCBs

F 200 series A type

F204

F204 125 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	783404	F204 A-25/0.03	2CSF204101R1250		0.360	1/3
		40	783503	F204 A-40/0.03	2CSF204101R1400		0.360	1/3
		63	783602	F204 A-63/0.03	2CSF204101R1630		0.360	1/3
		80	917809	F204 A-80/0.03	2CSF204101R1800		0.405	1/3
		100	917908	F204 A-100/0.03	2CSF204101R1900		0.405	1/3
		125	941903	F204 A-125/0.03	2CSF204101R1950		0.500	1
	100	25	787204	F204 A-25/0.1	2CSF204101R2250		0.360	1/3
		40	787303	F204 A-40/0.1	2CSF204101R2400		0.360	1/3
		63	787402	F204 A-63/0.1	2CSF204101R2630		0.360	1/3
		80	918004	F204 A-80/0.1	2CSF204101R2800		0.405	1/3
		100	918103	F204 A-100/0.1	2CSF204101R2900		0.405	1/3
		125	942009	F204 A-125/0.1	2CSF204101R2950		0.500	1
	300	25	783701	F204 A-25/0.3	2CSF204101R3250		0.360	1/3
		40	783800	F204 A-40/0.3	2CSF204101R3400		0.360	1/3
		63	783909	F204 A-63/0.3	2CSF204101R3630		0.360	1/3
		80	918202	F204 A-80/0.3	2CSF204101R3800		0.405	1/3
		100	918301	F204 A-100/0.3	2CSF204101R3900		0.405	1/3
		125	942108	F204 A-125/0.3	2CSF204101R3950		0.500	1
	500	25	784005	F204 A-25/0.5	2CSF204101R4250		0.360	1/3
		40	784104	F204 A-40/0.5	2CSF204101R4400		0.360	1/3
		63	784203	F204 A-63/0.5	2CSF204101R4630		0.360	1/3
		80	918400	F204 A-80/0.5	2CSF204101R4800		0.405	1/3
		100	918509	F204 A-100/0.5	2CSF204101R4900		0.405	1/3
		125	942207	F204 A-125/0.5	2CSF204101R4950		0.500	1

RCCBs

F 200 series A type left neutral

F204 left neutral

F204 left neutral 125 A

F 200 A type with neutral pole on the left
Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA). Product helpful where for installation habits, for wiring with bus-bars or cables, for special needs neutral on the left is needed.

Application: residential, commercial, industrial.
Standard: IEC/EN 61008-1; IEC/EN 61008-2-1
Marking: according to EN 61008-1; EN 61008-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	820109	F204 A-25/0.03	2CSF204123R1250		0.360	1/3
		40	820208	F204 A-40/0.03	2CSF204123R1400		0.360	1/3
		63	820307	F204 A-63/0.03	2CSF204123R1630		0.360	1/3
		80	918608	F204 A-80/0.03	2CSF204123R1800		0.405	1/3
		100	918707	F204 A-100/0.03	2CSF204123R1900		0.405	1/3
		125	967705	F204 A-125/0.03	2CSF204123R1950		0.500	1
	100	25	820406	F204 A-25/0.1	2CSF204123R2250		0.360	1/3
		40	820505	F204 A-40/0.1	2CSF204123R2400		0.360	1/3
		63	820604	F204 A-63/0.1	2CSF204123R2630		0.360	1/3
	300	25	820703	F204 A-25/0.3	2CSF204123R3250		0.360	1/3
		40	820802	F204 A-40/0.3	2CSF204123R3400		0.360	1/3
		63	820901	F204 A-63/0.3	2CSF204123R3630		0.360	1/3
		80	918806	F204 A-80/0.3	2CSF204123R3800		0.405	1/3
		100	918905	F204 A-100/0.3	2CSF204123R3900		0.405	1/3
		125	967804	F204 A-125/0.3	2CSF204123R3950		0.500	1
	500	25	821007	F204 A-25/0.5	2CSF204123R4250		0.360	1/3
		40	821106	F204 A-40/0.5	2CSF204123R4400		0.360	1/3
		63	821205	F204 A-63/0.5	2CSF204123R4630		0.360	1/3

RCCBs

F 200 series A type, AP-R (high immunity)

F202

F 200 AP-R, A type
Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing the best compromise between safety and continuity in the service thanks to the resistance to unwanted trippings; protection against indirect contacts and additional protection against direct contacts (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61008-1; IEC/EN 61008-2-1
Surge current resistance (wave 8/20)=3000 A
Marking: according to EN 61008-1; EN 61008-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	25	785101	F202 A-25/0.03 AP-R	2CSF202401R1250		0.200	1/6
		40	785200	F202 A-40/0.03 AP-R	2CSF202401R1400		0.200	1/6
		63	785309	F202 A-63/0.03 AP-R	2CSF202401R1630		0.200	1/6
		80	916406	F202 A-80/0.03 AP-R	2CSF202401R1800		0.200	1/6
		100	916505	F202 A-100/0.03 AP-R	2CSF202401R1900		0.200	1/6

F204

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	785408	F204 A-25/0.03 AP-R	2CSF204401R1250		0.360	1/3
		40	785507	F204 A-40/0.03 AP-R	2CSF204401R1400		0.360	1/3
		63	785606	F204 A-63/0.03 AP-R	2CSF204401R1630		0.360	1/3
		80	919407	F204 A-80/0.03 AP-R	2CSF204401R1800		0.405	1/3
		100	919506	F204 A-100/0.03 AP-R	2CSF204401R1900		0.405	1/3
		125	967903	F204 A-125/0.03 AP-R	2CSF204401R1950		0.500	1

F204 125 A

RCCBs

F 200 series A type, selective

F202

F204

F204 125 A

F 200 A selective type
Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents with an intentional tripping delay, which permits to realize the selectivity with downstream instantaneous devices (for more information about selectivity see the technical guide); protection against indirect contacts.

Application: commercial, industrial.
Standard: IEC/EN 61008-1; IEC/EN 61008-2-1
Surge current resistance (wave 8/20)=5000 A
Marking: according to EN 61008-1; EN 61008-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	100	40	822905	F202 A S-40/0.1	2CSF202201R2400		0.200	1/6
		63	823001	F202 A S-63/0.1	2CSF202201R2630		0.200	1/6
		100	916000	F202 A S-100/0.1	2CSF202201R2900		0.200	1/6
	300	40	784302	F202 A S-40/0.3	2CSF202201R3400		0.200	1/6
		63	784401	F202 A S-63/0.3	2CSF202201R3630		0.200	1/6
		100	916109	F202 A S-100/0.3	2CSF202201R3900		0.200	1/6
	500	40	784500	F202 A S-40/0.5	2CSF202201R4400		0.200	1/6
		63	784609	F202 A S-63/0.5	2CSF202201R4630		0.200	1/6
		100	916208	F202 A S-100/0.5	2CSF202201R4900		0.200	1/6
	1000	40	823100	F202 A S-40/1	2CSF202201R5400		0.200	1/6
		63	823209	F202 A S-63/1	2CSF202201R5630		0.200	1/6
		100	916307	F202 A S-100/1	2CSF202201R5900		0.200	1/6

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	100	40	823308	F204 A S-40/0.1	2CSF204201R2400		0.360	1/3
		63	823407	F204 A S-63/0.1	2CSF204201R2630		0.360	1/3
		100	919001	F204 A S-100/0.1	2CSF204201R2900		0.405	1/3
	300	40	784708	F204 A S-40/0.3	2CSF204201R3400		0.360	1/3
		63	784807	F204 A S-63/0.3	2CSF204201R3630		0.360	1/3
		100	919100	F204 A S-100/0.3	2CSF204201R3900		0.405	1/3
		125	968207	F204 A S-125/0.3	2CSF204201R3950		0.500	1
	500	40	784906	F204 A S-40/0.5	2CSF204201R4400		0.360	1/3
		63	785002	F204 A S-63/0.5	2CSF204201R4630		0.360	1/3
		100	919209	F204 A S-100/0.5	2CSF204201R4900		0.405	1/3
		125	968405	F204 A S-125/0.5	2CSF204201R4950		0.500	1
	1000	40	823506	F204 A S-40/1	2CSF204201R5400		0.360	1/3
		63	823605	F204 A S-63/1	2CSF204201R5630		0.360	1/3
		100	919308	F204 A S-100/1	2CSF204201R5900		0.405	1/3

RCCBs

F 200 110V series A type

F202 110V

F204 110V

F 200 110V A type

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA). This particular series of devices has the minimum operating voltage of test button of 110V and it is suitable for 230 V applications. This range is UL approved.

Application: residential, commercial, industrial.
Standard: IEC 61008-1; IEC 61008-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	25	343332	F202 A-25/0.03 110V	2CSF202199R1250		0.200	1/6
		40	343233	F202 A-40/0.03 110V	2CSF202199R1400		0.200	1/6
		63	343134	F202 A-63/0.03 110V	2CSF202199R1630		0.200	1/6
		80	343035	F202 A-80/0.03 110V	2CSF202199R1800		0.200	1/6
		100	342939	F202 A-100/0.03 110V	2CSF202199R1100		0.200	1/6

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	776734	F204 A-25/0.03 110V	2CSF204199R1250		0.360	1/3
		40	342830	F204 A-40/0.03 110V	2CSF204199R1400		0.360	1/3
		63	342731	F204 A-63/0.03 110V	2CSF204199R1630		0.360	1/3
		80	358435	F204 A-80/0.03 110V	2CSF204199R1800		0.405	1/3
		100	079132	F204 A-100/0.03 110V	2CSF204199R1100		0.405	1/3

RCCBs

F 200 series A type for high frequency and railways applications

F202

F204

F 200 A type for high frequency (400 Hz)
Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct (with IΔn=30 mA) contacts.
Advantages: increasing the frequency generates an increase of the magnetic reluctance of the toroidal transformer of standard RCCB and what follows is the value of the increasing operating residual current at 400 Hz reaching values 3 or more times higher than those of the residual current at 50 Hz. The RCCB F 200 400 Hz guarantees protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA) considering that the operating residual current doesn't increase with the increase of the network frequency.

Application: commercial, industrial.
Standard: IEC/EN 61008-1; IEC/EN 61008-2-1
Marking: according to EN 61008-1; EN 61008-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	968603	F204 A-25/0.03 400Hz	2CSF204197R1250		0.360	1/3
		40	968702	F204 A-40/0.03 400Hz	2CSF204197R1400		0.360	1/3

F200 A type 16 2/3 Hz
Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA).
The RCCB F200 16 2/3 Hz can work at rated frequency of 16 2/3 Hz which is common in railways applications

Application: railways
Standard: IEC/EN 61008-1; IEC/EN 61008-2-1
Marking: according to EN 61008-1; EN 61008-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	63	734536	F202 A-63/0.03 16-2/3Hz	2CSF202196R1630		0.200	1/6
	300	63	733638	F202 A-63/0.3 16-2/3Hz	2CSF202196R3630		0.200	1/6
	500	63	734437	F202 A-63/0.5 16-2/3Hz	2CSF202196R4630		0.200	1/6

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	63	733539	F204 A-63/0.03 16-2/3Hz	2CSF204196R1630		0.360	1/3
	300	63	734338	F204 A-63/0.3 16-2/3Hz	2CSF204196R3630		0.360	1/3
	500	63	733430	F204 A-63/0.5 16-2/3Hz	2CSF204196R4630		0.360	1/3

RCCBs

F 200 series F type

F202 F

F 200 series F type
Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA). Specifically suitable for the protection of lines supplying single phase inverters.

Application: residential, commercial, industrial.
Standard: IEC/EN 61008-1; IEC/EN 61008-2-1
Surge current resistance (wave 8/20)=3000 A
Marking: according to EN 61008-1; EN 61008-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	25	992738	F202 F-25/0.03	2CSF202325R1250		0.225	1/6
		40	992837	F202 F-40/0.03	2CSF202325R1400		0.225	1/6
		63	992936	F202 F-63/0.03	2CSF202325R1630		0.225	1/6
4	30	25	993032	F204 F-25/0.03	2CSF204325R1250		0.375	1/3
		40	993131	F204 F-40/0.03	2CSF204325R1400		0.375	1/3
		63	993230	F204 F-63/0.03	2CSF204325R1630		0.375	1/3

Notes

F 200 series - B
Details that make the difference

Easy to connect thanks to the availability of two terminals slot and compatible with busbars thanks to the System pro M compact clamps

Type B residual current devices are marked according to EN 62423. The marking indicates the different current types that Type B residual current devices are sensitive to

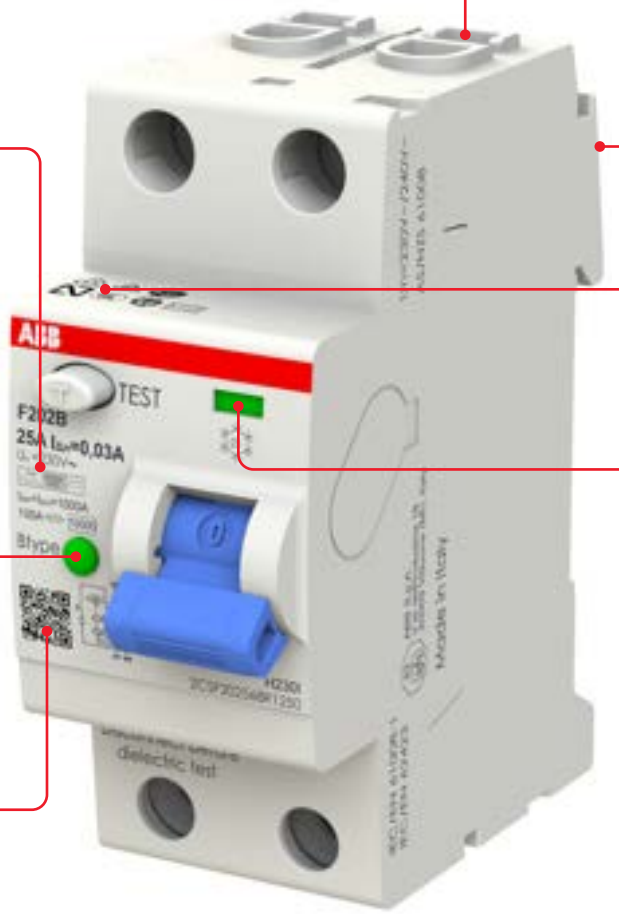

Two-pole device in only two modules

VDE approved

Indication of the position of the contacts

Frontal LED for device status monitoring

QR code to product webpage

F 200 series - B

Details that make the difference

Compatibility
Compatible with all System Pro M compact accessories of F200 series. Higher operational continuity thanks to auto-reclosing units and motor operating devices.

Robustness to operating environment
Operating temperature from -25 °C to +70 °C (for system up to 32 A). High immunity against unwanted tripping.

Self-diagnostics feature
Pushing the TEST button it is possible to check the proper functionality of the device regarding AC fault currents. Together with it, the F200 B range is introducing a SELF-DIAGNOSTICS feature. Thanks to this, the device is able to continuously verify the status of the DC fault currents detection functionality: each few seconds, an internal micro-controller is able to check the status of the main electronic components as well as the firmware integrity of the Voltage Dependent PCBA.

Low power consumption and pollution degree 3
Extreme low stand by power consumption and pollution degree 3 features (for 16–63 A devices 30–300 mA) ensure great performance during the time.

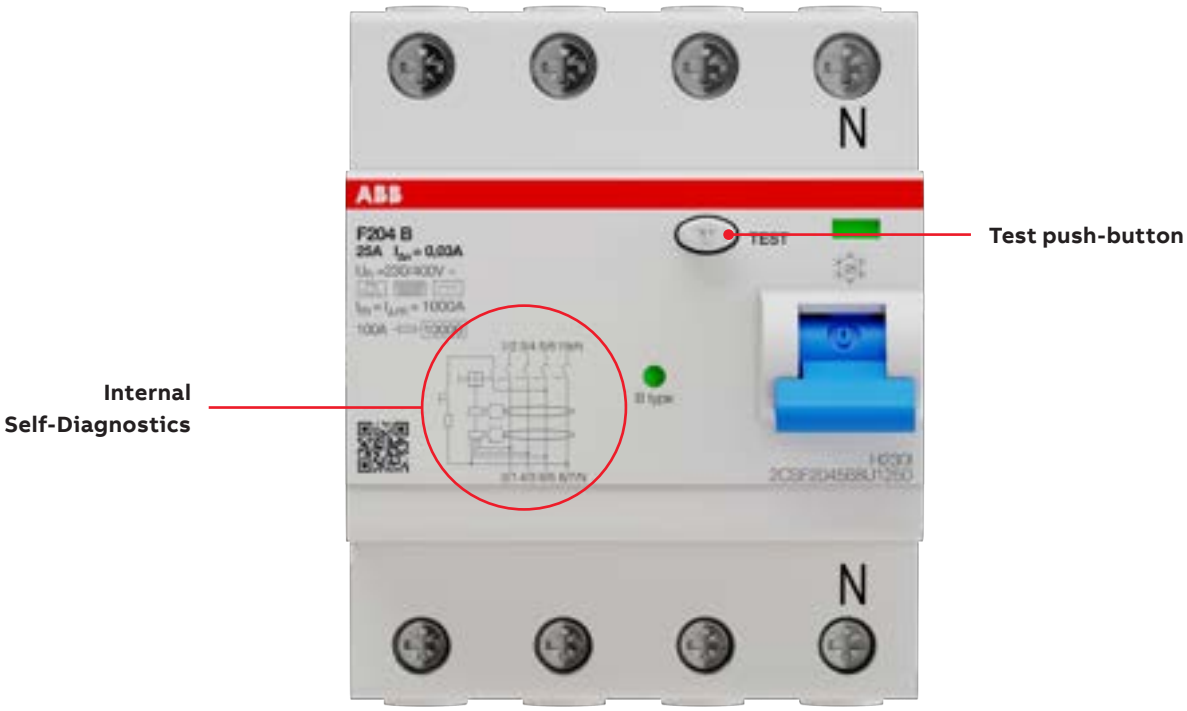

RCCBs

F 200 series - B type technical features

Standards			
Electrical features	Type (wave form of the earth leakage sensed)		
	Number of poles		
	Rated current I_n		A
	Rated sensitivity $I_{\Delta n}$		A
	Rated operational voltage U_e		V AC
	Rated Insulation voltage U_i acc. to IEC/EN 60664-1		V
	Operating voltage of circuit test U_t	IEC/EN	V
	Min. operating voltage for detecting Type A/AC residual currents		V AC
	Min. operating voltage for detecting Type B residual currents		V AC
	Rated frequency f		Hz
	Frequency range of residual current		kHz
	Rated conditional short-circuit current Inc=I_Δ [3]	SCPD - fuse gG 100 A	kA
	Rated residual breaking capacity $I_{\Delta m}$=Im		kA
	Grid distance		mm
	Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)		kV
	Dielectric test voltage at ind. freq. for 1 min.		kV
	Overvoltage category		
	Pollution degree		
	Surge current resistance (wave 8/20)		A
	Maximum electronic consumption		W
	Non-trip time		ms
	Internal consumption max		W
	Tripping frequency		
	Current heat loss per current path		W
Mechanical features	Housing Type		
	Toggle Type		
	Contact position indicator (CPI)		
	Electrical endurance		cycles (OFF-ON-OFF)
	Mechanical endurance		cycles (OFF-ON-OFF)
	Protection degree	housing	
		terminals	
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH
	Resistance to Shock acc. to IEC 60068-2-27		
	Resistance to Vibrations acc. to IEC 60068-2-6		
	Ambient temperature	IEC	°C
	Storage temperature		°C
Installation	Terminal Type		
	Cross-section of conductors	IEC (top / bottom)	mm²
	Cross-section of busbars	IEC (top / bottom)	mm²
	Wire Stripping Length		
	Tightening torque	IEC	Nm
	Screwdriver		
	Mounting Type		
	Supply from		
Dimensions and weight	Dimensions (H × D × W)	2P	mm
	Weight	2P	g
Combination with auxiliary elements	Combinable with:		
	auxiliary contact		
	signal contact/auxiliary switch		
	motor operating device		
	shunt trip		
	undervoltage release		
	Auto-reclosing unit		

[1] 500 mA devices
[2] Prior to connection of aluminium conductors (≥ 4 mm²) ensure that their contact points are cleaned, brushed and coated with grease
[3] For S750-E 63A, S750DR-E/K 63A and other SCPD coordination values are available.
[4] Constant temperature

F200 B Type		**F200 B Type high ratings**
F202 B 16-63 A	**F204 B 25-63 A**	**F204 B 80-125 A**
IEC/EN 61008-1, IEC/EN 61008-2-1, IEC/EN 62423		
B	B, B-S	B
2P	4P	4P
16, 25, 40, 63	25, 40, 63	80, 125
0,03 - 0,3	0,03 - 0,3 - 0,5	0,03 - 0,3 - 0,5
230	230/400	230/400
440	440 - 500 [1]	400
110 - 253 V AC 170 - 253 V AC (30 mA)	110 - 253 V AC 170 - 253 V AC (30 mA)	150 - 250 V AC (80 A) 200 - 250 V AC (80 A, 30 mA) 200 - 440 V AC (125 A) 250 - 440 V AC (125A, 30 mA)
0	0	0
50	50	50
50/60	50/60	50
2	2	100
10	10	10 (fuse gG 125 A)
1	1	125 A: 1,25 80 A: 1
35		
4	4	4
2,5	2,5	2,5
III, disconnector abilities	III, disconnector abilities	III, disconnector abilities
2		
3.000	3.000 - 5.000 (B S)	3.000 - 5.000 (B S)
0,3	1,2 (3,5[1])	
10	10	10
2.2	2.2	2.2
0 Hz … 150 kHz	0 Hz … 150 kHz	0 Hz … 150 kHz
11.2	11.2	11.2
Insulation group I-II; RAL 7035		
Insulation group I-II; RAL 5015		
yes	yes	yes
10.000	10.000	2.000
20.000	20.000	5.000
IP40	IP40	IP40
IP20	IP20	IP20
28 cycles with 55°C/90-96% and 25°C/95-100%		
25g - 2 shocks - 13ms		
0.1 mm or 1 g - 20 cycles at 5…150…5 Hz		
-25...+70 (for system current <= 32 A[4]) -25...+65 for system current = 40 A[4] -25...+50 for system current = 63 A[4] For other system current see derating table		-25…+40
-40…+70	-40…+70	-40…+70
Failsafe bi-directional cylinder-lift terminal at top and bottom (shock protected) (cage for I_n > 63 A) [2]		
25/25	25/25	50/50
10/10	10/10	
12 mm (for In=80-100 A 12,7 mm Top terminals and 14,9 mm Bottom terminals)		
2,8	2,8	3
Flat tip PZ2		
Any position on DIN rail EN 60715 (35 mm) by means of fast clip device		
Top/bottom		
85 × 69 × 35	85 × 69 × 70	85 × 69,5 × 72
220	380	500
yes	yes	no
yes	yes	yes
yes	yes	no
yes	yes	no
yes	yes	no
yes	yes	no

RCCBs

F 200 series - B type

F200 B Type from 16 to 63 A

F202 B

F204 B

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	16	341154	F202 B-16/0,03	2CSF202568R1160		0,220	1
		25	341253	F202 B-25/0,03	2CSF202568R1250		0,220	1
		40	341352	F202 B-40/0,03	2CSF202568R1400		0,220	1
		63	341154	F202 B-63/0,03	2CSF202568R1630		0,220	1
	300	16	341451	F202 B-16/0,3	2CSF202568R3160		0,220	1
		25	341550	F202 B-25/0,3	2CSF202568R3250		0,220	1
		40	341659	F202 B-40/0,3	2CSF202568R3400		0,220	1
		63	341758	F202 B-63/0,3	2CSF202568R3630		0,220	1
4	30	25	341857	F204 B-25/0,03	2CSF204568R1250		0,380	1
		40	341956	F204 B-40/0,03	2CSF204568R1400		0,380	1
		63	342052	F204 B-63/0,03	2CSF204568R1630		0,380	1
	300	25	342151	F204 B-25/0,3	2CSF204568R3250		0,380	1
		40	342250	F204 B-40/0,3	2CSF204568R3400		0,380	1
		63	342359	F204 B-63/0,3	2CSF204568R3630		0,380	1
	300 S	40	342458	F204 B S-40/0,3	2CSF204868R3400		0,380	1
		63	342557	F204 B S-63/0,3	2CSF204868R3630		0,380	1
	500	40	776932	F204 B-40/0,5[2]	2CSF204592R4400		0,380	1
		63	347637	F204 B-63/0,5[2]	2CSF204592R4630		0,380	1
	500 S	40	357834	F204 B S-40/0,5[2]	2CSF204892R4400		0,380	1
		63	347538	F204 B S-63/0,5[2]	2CSF204892R4630		0,380	1
2	30	25	356356	F202 B-25/0,03 U	2CSF202568U1250		0,220	48
4	30	25	356158	F204 B-25/0,03 U	2CSF204568U1250		0,380	24
		40	355953	F204 B-40/0,03 U	2CSF204568U1400		0,380	24
		63	356059	F204 B-63/0,03 U	2CSF204568U1630		0,380	24
	300	63	356257	F204 B-63/0,3 U	2CSF204568U3630		0,380	24

F200 B Type high ratings

F204 B 80, 125 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	80	988601	F204B-80/0,03[2]	2CSF204501R1800		0,460	1
		125	988700	F204B-125/0,03L[1,2]	2CSF204523R1950		0,460	1
	300	80	989103	F204B-80/0,3[2]	2CSF204501R3800		0,460	1
		125	989202	F204B-125/0,3L[1,2]	2CSF204523R3950		0,460	1
	300 S	125	989509	F204BS-125/0,3L[1,2]	2CSF204823R3950		0,460	1
	500	125	730439	F204B-125/0,5L[1,2]	2CSF204523R4950		0,460	1
	500 S	125	731238	F204BS-125/0,5L[1,2]	2CSF204823R4950		0,460	1

[1] Left-sided neutral pole
[2] No-self-diagnostics

Notes

RCCBs
F-ATI and F-ARI

F-ATI and F-ARI Test are RCCBs equipped with automatic test features. RCCBs are supposed to be checked every six months in order to make sure that the contacts are working properly and the device is able to trip in case of a leakage to earth. This swift operation affects the operational continuity of the circuits downstream and required a lot of man power. F-ATI and F-ARI test ranges push the periodic test to another level as this is run automatically and with no interruption at all of the service. Therefore, also the operations carried out by maintenance personnel are reduced to the very minimum.
In addition to the automatic test, F-ARI Range features a reclosing unit that tries to reclose the RCCB as it trips. The reclosing operations are based on an insulation check to make sure that no permanent fault is present. The insulation check is done with a very low current with no danger for human at any time. Once the insulation check is positive the reclosing unit
recloses the RCCB again. Moreover, the results coming from each and every circuit are collected at once thanks to ARBus interface.

Main benefits:
- Saving: maintenance costs are cut down as the device runs automatically the test monthly in accordance with EN 61008 provisions.
- Uptime: while running the test, no disconnection of the supply occurs like in the traditional RCCB units.
- Time saving: a full array of maximum 99 devices can be commanded and read by remote by the means of the ARBus interface.
- Easy installation: the unit is factory fitted and it needs no coupling
- Quality: F-ATI Test range is approved by VDE while F-ARI Test is approved by IMQ CSV.
- Smart: complete monitoring over the application thanks to a fault check system and a programmable aux contact
- Reliability: Suitable for demanding environments up to 60 °C
- High immunity: RCCBs cover both A APR & B types offering the adequate comprehensive solution according to the type of loads to be protected , the level of safety and the continuity of service.

RCCBs

F-ATI and F-ARI technical features

			F-ATI Test	F-ARI Test
Standards			EN61008-1, VDE V 0664-120 (annex M)	EN61008-1, CPT054, EN50557
Electrical features	Distribution system		TN, TT, IT	TN, TT
	Rated operational voltage U_e		230-400 V a.c. -15% ÷ 10%	
	Rated frequency f		50 Hz	
	Rated current In	A	25, 40, 63	
	Rated sensitivity IΔn	mA	30, 300	
	Type (wave form of the earth leakage sensed)		A AP-R, B	
	Number of poles		2P, 4P	
	Rated Insulation voltage U_i acc. to IEC/EN 60664-1	V d.c.	500	
	Minimum operating voltage of circuit test U_t	V a.c.	195	
	Rated non-operating resistance between live parts and earth Rdo		8 kΩ (30 mA), 2,5 kΩ(300 mA)	
	Rated operating resistance between live parts and earth Rd		16 kΩ (30 mA), 5 kΩ (300 mA)	
	Rated conditional short circuit current I_{nc}=IΔ		type A: 10 kA (SCPD – gL fuse 63 A for In 25, 40 A; gL fuse 80 A for In 63 A) type B: 10 kA (SCPD – gL fuse 63 A for In 25, 40, 63A)	
	Dielectric test voltage at ind. freq. for 1 min	kV	2,5	
	Rated impulse withstand voltage $U_{imp.}$ (1,2/50)	kV	4	
	Power loss		2P: 2.2 W (25 A); 5.4 W (40 A); 6.2 W (63 A) 4P: 3.5 W (25 A); 6 W (40 A); 12 W (63 A)	
	Power consumption during operation	VA	41	
Other features	Test cycle time	s	< 7	
	Reclosing time	s	< 10 (6 s check, 3 s reclosing)	
Mechanical features	Protecion degree acc. To EN 60529		IP20 (terminals), IP40 (housing)	
	Contact position indication (CPI)		yes	
	Mechanical life		4000	
Installation	Tightening torque	Nm	2	
	Ambient temperature (with daily average ≤ +35 °C)	°C	-25...+60 °C	
	Storage temperature	°C	-40...+70 °C	
Auxiliary contact	Type		NO-NC-NO+pulse (100 ms)	
	Operating features		5 ÷ 230 V a.c./d.c. Imax 100 mA	
	Cross-section of conductors	mm^2	2,5	
	Tightening torque	Nm	0,4	
Dimensions	DIN modules		Type A: 5 (2P), 7 (4P) Type B: 7 (2P), 7 (4P)	
	Weight	g	Type A: 550 (2P), 900 (4P) Type B: 700 (2P), 1000 (4P)	

			ARBus
Electrical features	Rated operational voltage U_e	V	230 V a.c. -15% ÷ 10%
	Rated frequency f	Hz	50
	Rated Insulation voltage Ui acc. to IEC/EN 60664-1	V	500 V d.c.
	Rated conditional short circuit current I_{nc}=IΔ	kA	10 kA (SCPD – gL fuse 63 A for In 25, 40 A; gL fuse 80 A for In 63 A)
	Rated impulse withstand voltage $U_{imp.}$ (1,2/50)	kV	4
	Power consumption	W	1
Installation	Cross-section of conductors	mm2	2,5
	Tightening torque	Nm	0,4
	Ambient temperature (with daily average ≤ +35 °C)	°C	-25...+60 °C
	Storage temperature	°C	-40...+70 °C
Communication	Protocol		Modbus RS485
	Baud rate		38400
	Addresses		1...99
Dimensions and weight	DIN modules		1
	Weight	g	180

RCCBs

F-ATI and F-ARI series A-APR type

F-ATI 2 Test

F-ARI 4 Test

F-ATI

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	25	288855	F-ATI2Test A-25/0.03	2CSF302130R1250		0.550	1
		40	288954	F-ATI2Test A-40/0.03	2CSF302130R1400		0.550	1
		63	289050	F-ATI2Test A-63/0.03	2CSF302130R1630		0.550	1
3P+N	30	25	289159	F-ATI4Test A-25/0.03	2CSF304130R1250		0.900	1
		40	289258	F-ATI4Test A-40/0.03	2CSF304130R1400		0.900	1
		63	289357	F-ATI4Test A-63/0.03	2CSF304130R1630		0.900	1
	300	25	289456	F-ATI4Test A-25/0.3	2CSF304130R3250		0.900	1
		40	289555	F-ATI4Test A-40/0.3	2CSF304130R3400		0.900	1
		63	289654	F-ATI4Test A-63/0.3	2CSF304130R3630		0.900	1

F-ARI Test

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	25	289753	F-ARI2Test A-25/0.03	2CSF302131R1250		0.550	1
		40	289852	F-ARI2Test A-40/0.03	2CSF302131R1400		0.550	1
		63	293453	F-ARI2Test A-63/0.03	2CSF302131R1630		0.550	1
3P+N	30	25	289951	F-ARI4Test A-25/0.03	2CSF304131R1250		0.900	1
		40	290056	F-ARI4Test A-40/0.03	2CSF304131R1400		0.900	1
		63	290155	F-ARI4Test A-63/0.03	2CSF304131R1630		0.900	1
	300	25	290254	F-ARI4Test A-25/0.3	2CSF304131R3250		0.900	1
		40	290353	F-ARI4Test A-40/0.3	2CSF304131R3400		0.900	1
		63	290452	F-ARI4Test A-63/0.3	2CSF304131R3630		0.900	1

RCCBs

F-ATI and F-ARI series B type

F-ATI 2 Test B

F-ARI 4 Test B

F-ATI

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	25	797159	F-ATI2test B-25/0.03	2CSF302534R1250		700	1
1P+N	30	40	797258	F-ATI2test B-40/0.03	2CSF302534R1400		700	1
1P+N	30	63	797357	F-ATI2test B-63/0.03	2CSF302534R1630		700	1
3P+N	30	25	797456	F-ATI4test B-25/0.03	2CSF304534R1250		1000	1
3P+N	30	40	797555	F-ATI4test B-40/0.03	2CSF304534R1400		1000	1
3P+N	30	63	797654	F-ATI4test B-63/0.03	2CSF304534R1630		1000	1
3P+N	300	25	797753	F-ATI4test B-25/0.3	2CSF304534R3250		1000	1
3P+N	300	40	797852	F-ATI4test B-40/0.3	2CSF304534R3400		1000	1
3P+N	300	63	797951	F-ATI4test B-63/0.3	2CSF304534R3630		1000	1

F-ARI Test

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	25	796251	F-ARI2test B-25/0.03	2CSF302535R1250		700	1
1P+N	30	40	796350	F-ARI2test B-40/0.03	2CSF302535R1400		700	1
1P+N	30	63	796459	F-ARI2test B-63/0.03	2CSF302535R1630		700	1
3P+N	30	25	796558	F-ARI4test B-25/0.03	2CSF304535R1250		1000	1
3P+N	30	40	796657	F-ARI4test B-40/0.03	2CSF304535R1400		1000	1
3P+N	30	63	796756	F-ARI4test B-63/0.03	2CSF304535R1630		1000	1
3P+N	300	25	796855	F-ARI4test B-25/0.3	2CSF304535R3250		1000	1
3P+N	300	40	796954	F-ARI4test B-40/0.3	2CSF304535R3400		1000	1
3P+N	300	63	797050	F-ARI4test B-63/0.3	2CSF304535R3630		1000	1

Communication Module

ARBus

ARBus module

	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
ARBus	293354	ARBus	2CSF300130R1989		0.180	1

DDA 200
The details make the difference
A range designed to ensure efficiency and protection

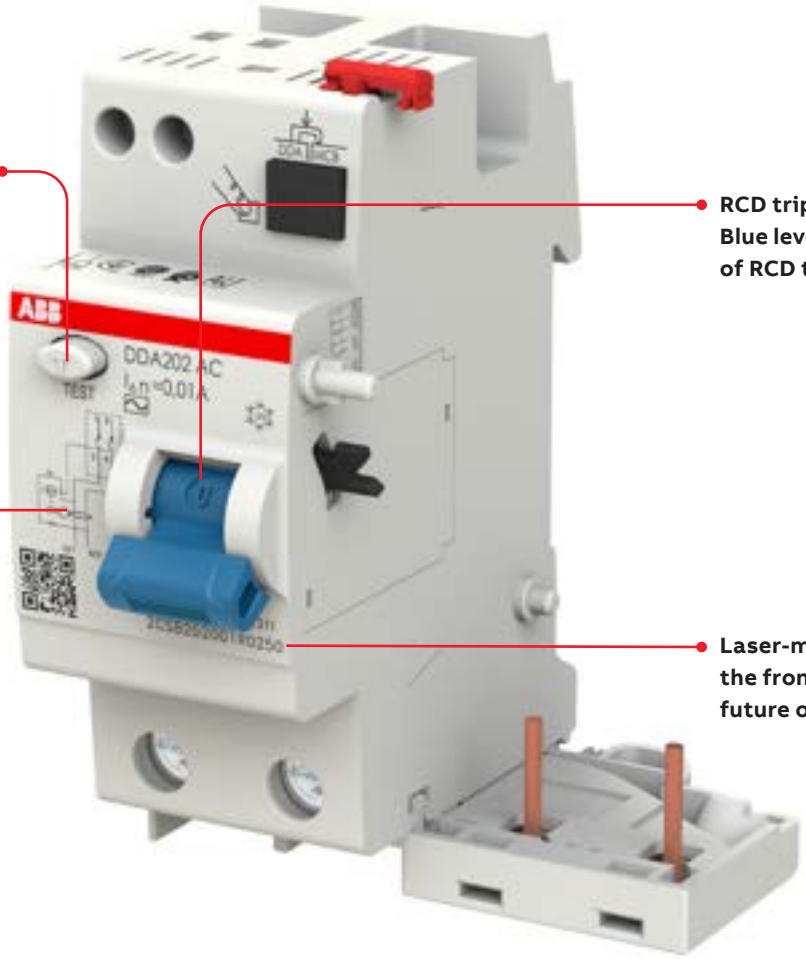

Test pushbutton to verify the correct functioning of the device.

RCD tripping indicator: Blue lever goes down in case of RCD tripping.

Information on the device are laser printed to ensure readability over time (including product code).

Laser-marked order code on the front to make easier future orders.

DDA200 RCD block mounted with S200 MCB.

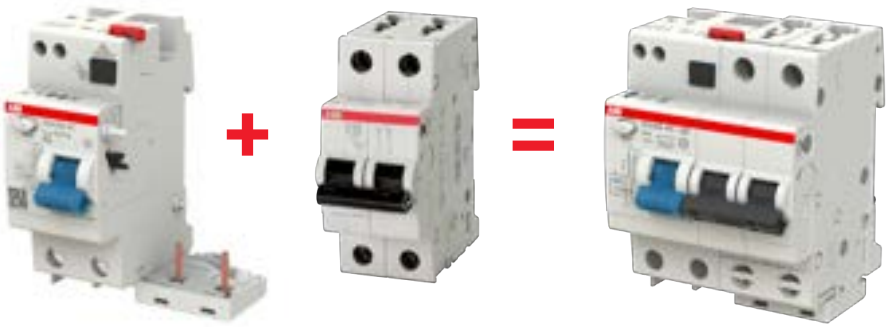

DDA200 RCD block + **S200 MCB** = **RCBO**

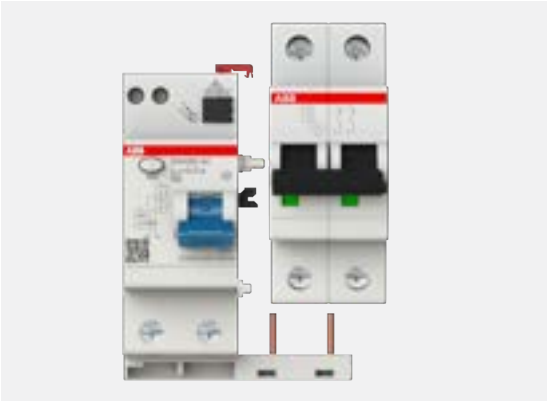

Flexibility
DDA200 is suitable for mounting with S200 extensive range of MCBs, covering applications up to 63A with breaking capacity up to 25kA.

RCD block DDA200 can be used in ambient conditions where the temperature of the surrounding atmosphere has values between -25 °C (snowflake laser printed on the front of the device) and +55 °C.

Possibility to connect a remote test button for 63A versions.

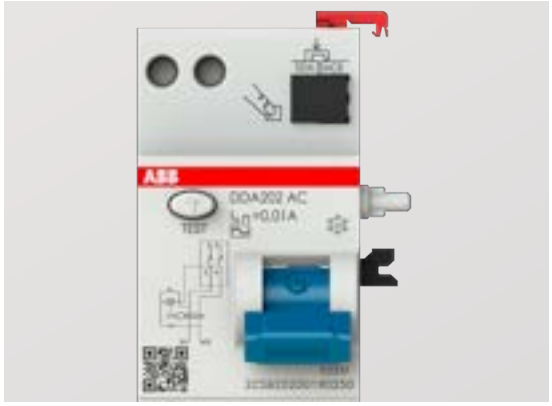

No misuse
Mistakes in assembling the MCB on the DDA200 are avoided thanks to a mechanical key that avoids mounting an MCB with higher rated current than the RCD block.

RCD-blocks

DDA 200 technical features

DDA 200

Standards		
Type (wave form of the earth leakage sensed)		
Rated current I_n		[A]
Number of poles		
Rated operational voltage U_e	2P	[V]
	3P	
	4P	
Rated Insulation voltage U_i acc. to IEC/EN 60664-1		[V]
Pollution degree		
Operating voltage of circuit test U_t	2P	[V]
	3P	
	4P	
Rated frequency f		[Hz]
Rated breaking capacity according to	IEC EN 61009	[A]
Rated breaking capacity according to	IEC EN 60947-2	[A]
Rated residual breaking capacity $I_{\Delta m}$		[kA]
Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)		[kV]
Dielectric test voltage at ind. freq. for 1 min.		[kV]
Surge current resistance (wave 8/20)		[A]
Rated sensitivity $I_{\Delta n}$		[A]
Housing Type		
Toggle Type		
Electrical endurance	cycles (OFF-ON-OFF)	
Mechanical endurance	cycles (OFF-ON-OFF)	
Protection degree	housing	
	terminals	
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		[°C/RH]
Resistance to Shock acc. to IEC 60068-2-27		
Resistance to Vibrations acc. to IEC 60068-2-6		
Ambient temperature (with daily average ≤ +35 °C)		[°C]
Storage temperature		[°C]
Terminal type	2P	
	3P/4P I_n=25 and 40 A	
	3P/4P I_n=63 A	
Cross-section of conductors	2P	[mm²]
	3P/4P I_n=25 and 40 A	[mm²]
	3P/4P I_n=63 A	[mm²]
Tightening torque	2P	[Nm]
	3P/4P I_n=25 and 40 A	[Nm]
	3P/4P I_n=63 A	[Nm]
Wire Stripping Length		
Mounting Type		
Mounting position		
Dimensions (H x D x W)	2P	[mm]
	3P I_n=25 and 40 A 4P I_n=25 and 40 A	[mm]
	3P I_n=63 A 4P I_n=63 A	[mm]
Weight	2P	[g]
	3P/4P I_n=25 and 40 A	[g]
	3P/4P I_n=63 A	[g]
Combinable with	S 200 L	
	S 200	
	S 200 M	
	S 200 P	

① All RCD-blocks DDA 200 with rated current 63 A are provided with two additional terminals for remote tripping.

② DDA200 A AE is provided with two additional terminals for remote release in positive safety.

A remote control circuit should be connected to those terminals where circuit breakers or push buttons with normally closed contacts should be inserted.

③ DDA 200 dimensions has been established without considering the bottom cover. For further details please refer to dimensions shown on chapter 28.

RCD-blocks

DDA 200 technical features

DDA 200 AC	DDA 200 A	DDA 200 A AP-R	DDA 200 A AE	DDA 200 A S	DDA 200 F	DDA 200 B
IEC/EN 61009-1 Ann. G; IEC/EN 61009-2-1					IEC/EN 61009 App.G, IEC/EN 62423 2nd ed	IEC/EN 61009-1 Ann. G; IEC/EN 61009-2-1, IEC EN 62423
AC	A	A	A	A	F	B
25, 40, 63 ①		25, 40, 63 ①	63 ②	63 ①	40, 63 A1 (to mount with MCB with In = 0,5…63A)	25-40-63
2P, 3P, 4P					2P	2P, 3P, 4P
230 (400 for special execution @400 V)			230	230	230	230
230/400			400	400	-	400
230/400			230/400	230/400	-	230/400
500						
2						
110-254 for special execution @110V; 195-254 (170-254 for 30 mA; 400 for special execution @400 V)			184-264	195-254 (170-254 for 30 mA)	254/170	195-254 (170-254 for 30 mA)
195-440 (300-440 for 30 mA; 110-254 for special execution @110 V)			310-440	195-440 (300-440 for 30 mA)	-	310-440 (300-440 for 30 mA)
195-440 (300-440 for 30 mA; 110-254 for special execution @110 V)			184-264	195-440 (300-440 for 30 mA)	-	195-254 (300-440 for 30 mA)
50	50/60	50/60	50/60	50/60	50/60	50/60
same of the coupled MCB						
same of the coupled MCB						
same of the coupled MCB						
4						
2,5						
NA		3000	NA	5000	3000	3000 (5000 for selective types)
0.01-0.03-0.1-0.3-0.5-1		0.03	0.03-0.3-0.5-1	0.1-0.3-0.5-1	-	0.03 - 0.3 - 0.5
RAL 7035						
RAL 7035						
10000						
20000						
IP40						
IP20						
28 cycles with 55°C/90-96% and 25°C/95-100%						
25g - 2 shocks - 13ms						
0.1 mm or 1 g - 20 cycles at 5…150…5 Hz						
-25…+55						
-40…+70						
bi-directional cylinder-lift					Top: failsafe bi-directional cylinder-lift terminal (shock protected) Bottom: failsafe cylinder-lift terminal (shock protected)	bi-directional cylinder-lift
cage type					-	-
bi-directional cylinder-lift					-	bi-directional
(rigid or flexible) up to 25						cylinder-lift
(rigid or flexible) up to 16					-	-
(rigid or flexible) up to 25					-	(rigid or flexible) up to 25
2.8						
1.2					-	-
2.8					-	2.8
12,5 mm (10,2 mm for the additional terminals for remote tripping, only for In=63A)						
on DIN rail EN 60715 (35 mm) by means of fast clip device						
Any						
93 x 69 x 70 (in 4 modules)					-	93 x 69 x 105 (in 6 modules)
3P: 93 x 69 x 87.5 (in 5 modules) 4P: 93 x 69 x 105 (in 6 modules)					-	4P: 93 x 69 x 140 (in 8 modules)
3P: 93 x 69 x 122.5 (in 7 modules) 4P: 93 x 69 x 140 (in 8 modules)					-	3P: 93 x 69 x 122.5 (in 7 mod.) 4P: 93 x 69 x 140 (in 8 mod.)
175					180	350
175					-	375
325					-	395
yes					-	yes
yes					-	yes
yes					-	yes
yes					-	yes

RCD-blocks

DDA 200 series AC ∿ type

DDA 202

DDA 200 AC type

Function: RCD-block for assembly on site with MCBs S 200 series. Protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1 Ann. G; IEC/EN 61009-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	10	25	791003	DDA202 AC-25/0.01	2CSB202001R0250		0.180	1
	30	25	791102	DDA202 AC-25/0.03	2CSB202001R1250		0.180	1
		40	791201	DDA202 AC-40/0.03	2CSB202001R1400		0.180	1
		63 ②	791300	DDA202 AC-63/0.03	2CSB202001R1630		0.180	1
	100	25	791409	DDA202 AC-25/0.1	2CSB202001R2250		0.180	1
		40	791508	DDA202 AC-40/0.1	2CSB202001R2400		0.180	1
		63 ②	791607	DDA202 AC-63/0.1	2CSB202001R2630		0.180	1
	300	25	791706	DDA202 AC-25/0.3	2CSB202001R3250		0.180	1
		40	791805	DDA202 AC-40/0.3	2CSB202001R3400		0.180	1
		63 ②	791904	DDA202 AC-63/0.3	2CSB202001R3630		0.180	1
	500	25	792000	DDA202 AC-25/0.5	2CSB202001R4250		0.180	1
		40	792109	DDA202 AC-40/0.5	2CSB202001R4400		0.180	1
		63 ②	792208	DDA202 AC-63/0.5	2CSB202001R4630		0.180	1
	1000	25	808305	DDA202 AC-25/1	2CSB202001R5250		0.180	1
		40	808404	DDA202 AC-40/1	2CSB202001R5400		0.180	1
		63 ②	792307	DDA202 AC-63/1	2CSB202001R5630		0.180	1
	2000	63	792406	DDA202 AC-63/2	2CSB202001R6630		0.180	1

DDA 203 25A and 40A

DDA 203 63A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	25	792505	DDA203 AC-25/0.03	2CSB203001R1250		0.220	1
		40	792604	DDA203 AC-40/0.03	2CSB203001R1400		0.220	1
		63 ②	792703	DDA203 AC-63/0.03	2CSB203001R1630		0.260	1
	100	25	792802	DDA203 AC-25/0.1	2CSB203001R2250		0.220	1
		40	792901	DDA203 AC-40/0.1	2CSB203001R2400		0.220	1
		63 ②	793007	DDA203 AC-63/0.1	2CSB203001R2630		0.260	1
	300	25	793106	DDA203 AC-25/0.3	2CSB203001R3250		0.220	1
		40	793205	DDA203 AC-40/0.3	2CSB203001R3400		0.220	1
		63 ②	793304	DDA203 AC-63/0.3	2CSB203001R3630		0.260	1
	500	25	793403	DDA203 AC-25/0.5	2CSB203001R4250		0.220	1
		40	793502	DDA203 AC-40/0.5	2CSB203001R4400		0.220	1
		63 ②	793601	DDA203 AC-63/0.5	2CSB203001R4630		0.260	1
	1000	25	808503	DDA203 AC-25/1	2CSB203001R5250		0.220	1
		40	808602	DDA203 AC-40/1	2CSB203001R5400		0.220	1
		63 ①②	793700	DDA203 AC-63/1	2CSB203001R5630		0.260	1
	2000	63	793809	DDA203 AC-63/2	2CSB203001R6630		0.260	1

① version with test button working at 110VAC - 254VAC is available. For selection tables refer to special version paragraph.
② provided with additional terminals for remote tripping.

RCD-blocks

DDA 200 series AC type

DDA 204 25A and 40A

DDA 204 63A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	793908	DDA204 AC-25/0.03	2CSB204001R1250		0.260	1
		40	794004	DDA204 AC-40/0.03	2CSB204001R1400		0.260	1
		63 ①②	794103	DDA204 AC-63/0.03	2CSB204001R1630		0.305	1
	100	25	794202	DDA204 AC-25/0.1	2CSB204001R2250		0.260	1
		40	794301	DDA204 AC-40/0.1	2CSB204001R2400		0.260	1
		63 ②	794400	DDA204 AC-63/0.1	2CSB204001R2630		0.305	1
	300	25	794509	DDA204 AC-25/0.3	2CSB204001R3250		0.260	1
		40	794608	DDA204 AC-40/0.3	2CSB204001R3400		0.260	1
		63 ②	794707	DDA204 AC-63/0.3	2CSB204001R3630		0.305	1
	500	25	794806	DDA204 AC-25/0.5	2CSB204001R4250		0.260	1
		40	794905	DDA204 AC-40/0.5	2CSB204001R4400		0.260	1
		63 ②	795001	DDA204 AC-63/0.5	2CSB204001R4630		0.305	1
	1000	25	808701	DDA204 AC-25/1	2CSB204001R5250		0.260	1
		40	808800	DDA204 AC-40/1	2CSB204001R5400		0.260	1
		63 ②	795100	DDA204 AC-63/1	2CSB204001R5630		0.305	1
	2000	63	795209	DDA204 AC-63/2	2CSB204001R6630		0.305	1

① version with test button working at 110VAC - 254VAC is available. For selection tables refer to special version paragraph.
② provided with additional terminals for remote tripping.

RCD-blocks

DDA 200 series A type

DDA 202

DDA 200 A type

Function: RCD-block for assembly on site with MCBs S 200 series. Protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1 Ann. G; IEC/EN 61009-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	10	25	795308	DDA202 A-25/0.01	2CSB202101R0250		0.180	1
	30	25	795407	DDA202 A-25/0.03	2CSB202101R1250		0.180	1
		40	795506	DDA202 A-40/0.03	2CSB202101R1400		0.180	1
		63 ②	795605	DDA202 A-63/0.03	2CSB202101R1630		0.180	1
	100	25	795704	DDA202 A-25/0.1	2CSB202101R2250		0.180	1
		40	795803	DDA202 A-40/0.1	2CSB202101R2400		0.180	1
		63 ②	795902	DDA202 A-63/0.1	2CSB202101R2630		0.180	1
	300	25	796008	DDA202 A-25/0.3	2CSB202101R3250		0.180	1
		40	796107	DDA202 A-40/0.3	2CSB202101R3400		0.180	1
		63 ②	796206	DDA202 A-63/0.3	2CSB202101R3630		0.180	1
	500	25	796305	DDA202 A-25/0.5	2CSB202101R4250		0.180	1
		40	796404	DDA202 A-40/0.5	2CSB202101R4400		0.180	1
		63 ②	796503	DDA202 A-63/0.5	2CSB202101R4630		0.180	1
	1000	25	808909	DDA202 A-25/1	2CSB202101R5250		0.180	1
		40	809005	DDA202 A-40/1	2CSB202101R5400		0.180	1
		63 ②	796602	DDA202 A-63/1	2CSB202101R5630		0.180	1

DDA 203 25A and 40A

DDA 203 63A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	25	796701	DDA203 A-25/0.03	2CSB203101R1250		0.220	1
		40 ①	796800	DDA203 A-40/0.03	2CSB203101R1400		0.220	1
		63 ①②	796909	DDA203 A-63/0.03	2CSB203101R1630		0.260	1
	100	25	797005	DDA203 A-25/0.1	2CSB203101R2250		0.220	1
		40	797104	DDA203 A-40/0.1	2CSB203101R2400		0.220	1
		63 ②	797203	DDA203 A-63/0.1	2CSB203101R2630		0.260	1
	300	25	797302	DDA203 A-25/0.3	2CSB203101R3250		0.220	1
		40	797401	DDA203 A-40/0.3	2CSB203101R3400		0.220	1
		63 ②	797500	DDA203 A-63/0.3	2CSB203101R3630		0.260	1
	500	25	797609	DDA203 A-25/0.5	2CSB203101R4250		0.220	1
		40	797708	DDA203 A-40/0.5	2CSB203101R4400		0.220	1
		63 ②	797807	DDA203 A-63/0.5	2CSB203101R4630		0.260	1
	1000	25	809104	DDA203 A-25/1	2CSB203101R5250		0.220	1
		40	809203	DDA203 A-40/1	2CSB203101R5400		0.220	1
		63 ②	797906	DDA203 A-63/1	2CSB203101R5630		0.260	1

① version with test button working at 110VAC - 254VAC is available. For selection tables refer to special version paragraph.
② provided with additional terminals for remote tripping.

RCD-blocks

DDA 200 series A type

DDA 204 25A and 40A

DDA 204 63A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	798002	DDA204 A-25/0.03	2CSB204101R1250		0.260	1
		40	798101	DDA204 A-40/0.03	2CSB204101R1400		0.260	1
		63 ①②	798200	DDA204 A-63/0.03	2CSB204101R1630		0.305	1
	100	25	798309	DDA204 A-25/0.1	2CSB204101R2250		0.260	1
		40	798408	DDA204 A-40/0.1	2CSB204101R2400		0.260	1
		63 ②	798507	DDA204 A-63/0.1	2CSB204101R2630		0.305	1
	300	25	798606	DDA204 A-25/0.3	2CSB204101R3250		0.260	1
		40	798705	DDA204 A-40/0.3	2CSB204101R3400		0.260	1
		63 ②	798804	DDA204 A-63/0.3	2CSB204101R3630		0.305	1
	500	25	798903	DDA204 A-25/0.5	2CSB204101R4250		0.260	1
		40	799009	DDA204 A-40/0.5	2CSB204101R4400		0.260	1
		63 ②	799108	DDA204 A-63/0.5	2CSB204101R4630		0.305	1
	1000	25	809302	DDA204 A-25/1	2CSB204101R5250		0.260	1
		40	809401	DDA204 A-40/1	2CSB204101R5400		0.260	1
		63 ②	799207	DDA204 A-63/1	2CSB204101R5630		0.305	1

① version with test button working at 110VAC - 254VAC is available. For selection tables refer to special version paragraph.
② provided with additional terminals for remote tripping.

RCD-blocks

DDA 200 special version 110 V and 400 V

DDA 202

DDA 203 25A and 40A

DDA 203 63A

DDA 204 25A and 40A

DDA 204 63A

DDA 200 special version 110 V and 400 V
Function: special version of RCD-blocks to assembly on site with MCBs S 200 series. Special version are available with protection against the effects of sinusoidal alternating and/or direct pulsating earth fault currents, protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA).
DDA200 110 V is a particular RCD-block with voltage range for test button Ut = 110-254 V. RCD- blocks work for naval applications where the IT system is typically used and the voltage between the phase and the neutral conductor is 115 - 125 V. DDA200 110 V (Ut = 110-254 V) are suitable for naval applications.
Special version is also available for 400 V in the two poles version working in two-phase industrial systems where voltage between phases is 400 V.

Applications: naval, industrial.
Standards: IEC 61009-1 Ann. G; IEC 61009-2-1

110 V version

AC type

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	63 ①	929901	DDA 204 AC-63/0.03 110V	2CSB204099R1630		0.350	1

A type

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	25	079033	DDA202 A-25/0.03 110V	2CSB202199R1250		0.180	1
		40	078937	DDA202 A-40/0.03 110V	2CSB202199R1400		0.180	1
		63 ①	078838	DDA202 A-63/0.03 110V	2CSB202199R1630		0.180	1
3	30	40	811701	DDA 203 A-40/0.03 110V	2CSB203199R1400		0.350	1
		63 ①	811800	DDA 203 A-63/0.03 110V	2CSB203199R1630		0.350	1
4	30	63 ①	812104	DDA 204 A-63/0.03 110V	2CSB204199R1630		0.350	1

400 V version

A type

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	63 ①	954934	DDA 202 A-63/0.03 400V	2CSB202192R1630		0.200	1

① provided with additional terminals for remote tripping.

RCD-blocks

DDA 200 series A type, AP-R (high immunity)

DDA 202

DDA 200 AP-R, A type

Function: RCD-block for assembly on site with MCBs S 200 series. Protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing the best compromise between safety and continuity in the service thanks to the resistance to unwanted trippings; protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1 Ann. G; IEC/EN 61009-2-1
Surge current resistance (wave 8/20)=3000 A

DDA 203 25A and 40A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	25	801108	DDA202 A-25/0.03 AP-R	2CSB202401R1250		0.180	1
		40	801207	DDA202 A-40/0.03 AP-R	2CSB202401R1400		0.180	1
		63 ①	801306	DDA202 A-63/0.03 AP-R	2CSB202401R1630		0.180	1
	300	63	961932	DDA202 A-63/0,3 AP-R	2CSB202401R3630		0,260	1

DDA 203 63A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	25	811008	DDA203 A-25/0.03 AP-R	2CSB203401R1250		0.220	1
		40	811107	DDA203 A-40/0.03 AP-R	2CSB203401R1400		0.220	1
		63 ①	811206	DDA203 A-63/0.03 AP-R	2CSB203401R1630		0.260	1

DDA 204 25A and 40A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	801405	DDA204 A-25/0.03 AP-R	2CSB204401R1250		0.260	1
		40	801504	DDA204 A-40/0.03 AP-R	2CSB204401R1400		0.260	1
		63 ①	801603	DDA204 A-63/0.03 AP-R	2CSB204401R1630		0.305	1

① provided with additional terminals for remote tripping

DDA 204 63A

RCD-blocks

DDA 200 series A type, AE (for emergency stop)

DDA 202

DDA 200 AE, A type

Function: RCD-block for assembly on site with MCBs S 200 series. Protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with In=30 mA).
The RCD-block is provided with two additional terminals to be used in emergency circuits for remote opening in positive safety. A remote control circuit should be connected to those terminals where NC push buttons should be inserted in series.

ATTENTION!

It's allowed to use multiple NC buttons to control one DDA200 AE but it's not permitted to use one button in a control circuit for more RCD-blocks DDA200 AE. DDA200 AE must be supplied by the top side.

Application: commercial, industrial.
Standard: IEC/EN 61009-1 Ann. G; IEC/EN 61009-2-1

DDA 203 25A and 40A

DDA 203 63A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	63	801702	DDA202 A-63/0.03 AE	2CSB202701R1630		0.180	1
	300	63	801801	DDA202 A-63/0.3 AE	2CSB202701R3630		0.180	1
	500	63	801900	DDA202 A-63/0.5 AE	2CSB202701R4630		0.180	1
	1000	63	802006	DDA202 A-63/1 AE	2CSB202701R5630		0.180	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	63	802105	DDA203 A-63/0.03 AE	2CSB203701R1630		0.260	1
	300	63	802204	DDA203 A-63/0.3 AE	2CSB203701R3630		0.260	1
	500	63	802303	DDA203 A-63/0.5 AE	2CSB203701R4630		0.260	1
	1000	63	802402	DDA203 A-63/1 AE	2CSB203701R5630		0.260	1

DDA 204 25A and 40A

DDA 204 63A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	63	802501	DDA204 A-63/0.03 AE	2CSB204701R1630		0.305	1
	300	63	802600	DDA204 A-63/0.3 AE	2CSB204701R3630		0.305	1
	500	63	802709	DDA204 A-63/0.5 AE	2CSB204701R4630		0.305	1
	1000	63	802808	DDA204 A-63/1 AE	2CSB204701R5630		0.305	1

RCD-blocks

DDA 200 series A type, selective

DDA 202

DDA 203 25A and 40A

DDA 203 63A

DDA 204 25A and 40A

DDA 204 63A

DDA 200 A selective type
Function: RCD-block for assembly on site with MCBs S 200 series. Protection against the effects of sinusoidal alternating and direct pulsating earth fault currents with an intentional tripping delay, which permits to realize the selectivity with downstream instantaneous devices (for more information about selectivity see the technical guide).

Application: commercial, industrial.
Standard: IEC/EN 61009-1 Ann. G; IEC/EN 61009-2-1
Surge current resistance (wave 8/20)=5000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	100	63	799306	DDA202 A S-63/0.1	2CSB202201R2630		0.180	1
	300	63	799405	DDA202 A S-63/0.3	2CSB202201R3630		0.180	1
	500	63	799504	DDA202 A S-63/0.5	2CSB202201R4630		0.180	1
	1000	63	799603	DDA202 A S-63/1	2CSB202201R5630		0.180	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	100	63	799702	DDA203 A S-63/0.1	2CSB203201R2630		0.260	1
	300	63	799801	DDA203 A S-63/0.3	2CSB203201R3630		0.260	1
	500	63	799900	DDA203 A S-63/0.5	2CSB203201R4630		0.260	1
	1000	63	800002	DDA203 A S-63/1	2CSB203201R5630		0.260	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	100	63	800101	DDA204 A S-63/0.1	2CSB204201R2630		0.305	1
	300	63	800200	DDA204 A S-63/0.3	2CSB204201R3630		0.305	1
	500	63	800309	DDA204 A S-63/0.5	2CSB204201R4630		0.305	1
	1000	63	800408	DDA204 A S-63/1	2CSB204201R5630		0.305	1

Attention: All DDA 200 A S are provided with additional terminals for remote tripping

RCD-blocks

DDA 200 series F type

DDA 202

DDA 200 series F type
Function: RCD-block for assembly on site with MCBs S 200 series. Protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with IΔn=30 mA). Specifically suitable for the protection of lines supplying single phase inverters.

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1 Ann. G; IEC/EN 61009-2-1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	40	801221	DDA 202 F-40/0.03	2CSB202325R1400		0.180	1
		63	801122	DDA 202 F-63/0.03	2CSB202325R1630		0.180	1

Notes

RCD-blocks

DDA 200 series B type

DDA 202 type B

DDA 200 type B for continuous type fault currents
RCD-blocks type B are also sensitive to continuous or mainly continuous (continuous with weak ondulation) current pulsating earth fault currents. They are also sensitive to alternate sinusoidal and direct pulsating earth fault currents as with type A circuit breakers.
They satisfy the requirements of type A devices and thus the requirements for type AC devices which can be considered an extension. For this reason the differential blocks type B are sometimes referred as “universal type”, as sensitive to “all” kind of residual current shape.
DDA 200 type B can be coupled with all the S 200 series MCBs.
They are used for protection in installations with electronic equipments according to EN 50178.

Applications: tertiary and industrial.
Standards: IEC/EN 61009-1 Ann. G; IEC/EN 61009-2-1; IEC 62423 ed.2
Surge current resistance (8/20 wave): 3000 A

DDA 203 type B

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	25	748021	DDA202 B APR-25/0,03	2CSB202592R1250		0.350	1
		40	515128	DDA202 B APR-40/0,03	2CSB202592R1400		0.350	1
		63	610922	DDA202 B APR-63/0,03	2CSB202592R1630		0.350	1
	300	25	733324	DDA202 B APR-25/0,3	2CSB202592R3250		0.350	1
		63	732426	DDA202 B APR-63/0,3	2CSB202592R3630		0.350	1

DDA 204 type B

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	63	733225	DDA203 B APR-63/0,03	2CSB203592R1630		0.375	1
	300	63	732327	DDA203 B APR-63/0,3	2CSB203592R3630		0.375	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	732228	DDA204 B APR-25/0,03	2CSB204592R1250		0.395	1
		40	020325	DDA204 B APR-40/0,03	2CSB204592R1400		0.395	1
		63	733027	DDA204 B APR-63/0,03	2CSB204592R1630		0.395	1
	300	25	732129	DDA204 B APR-25/0,3	2CSB204592R3250		0.395	1
		63	732921	DDA204 B APR-63/0,3	2CSB204592R3630		0.395	1
	500	63	732020	DDA204 B APR-63/0,5	2CSB204592R4630		0.395	1

RCD-blocks

DDA 200 series B type

DDA 203 type B

DDA 200 type B for selective continuous type fault currents
Function: protection against the effects of alternate sinusoidal, direct pulsating, continuous current and continuous current pulsating earth fault currents with an intentional trip delay that permits selectivity with instantaneous type devices placed downstream (for further information on selectivity, see Chapter 3 of Electrical installation solutions for buildings - technical details).
DDA 200 type B can be coupled with all the S 200 series MCBs.
They are used for protection in installations with electronic equipments according to EN 50178.

Applications: tertiary and industrial.
Standards: IEC/EN 61009-1 Ann. G; IEC/EN 61009-2-1; IEC 62423 ed.2
Surge current resistance (8/20 wave): 5000 A

DDA 204 type B

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	300	63	733126	DDA203 B S-63/0,3	2CSB203892R3630		0.375	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	300	63	732822	DDA204 B S-63/0,3	2CSB204892R3630		0.395	1

RCD-blocks

DDA 800 technical features

DDA 800

	Standards		
Electrical features	Type (wave form of the earth leakage sensed)		
	Poles		
	Rated current In		A
	Rated sensitivity IΔn		A
	Rated voltage Ue		V
	Insulation voltage Ui		V
	Operating voltage of circuit test Ut		V
	Rated frequency		Hz
	Rated breaking capacity (Icn) acc. to IEC /EN 60947-2		A
	Rated residual breaking capacity IΔm	with S800P, S800S, S800N, S800C, S800B	kA
	Rated impulse withstand voltage (1.2/50) Uimp		kV
	Dielectric test voltage at ind. freq. for 1 min.		kV
	Surge current resistance (wave 8/20)		A
Mechanical features	Toggle		
	Electrical Endurance		cycles (OFF-ON-OFF)
	Mechanical Endurance		cycles (OFF-ON-OFF)
	Protection degree	housing	
		terminals	
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH
	Ambient temperature (with daily average ≤ +35 °C)		°C
	Storage temperature		°C
	Terminal size for cables	flexible	mm^2
		rigid	mm^2
	Tightening torque		Nm
	Mounting		
Dimensions and weight	Dimensions (H x D x W)	2P	mm
		3P	mm
		4P	mm
	Weight	2P	g
		3P	g
		4P	g
Combination with MCBs	Combinable with:	S800P, S800S, S800N, S800C, S800B	

* only on 3P and 4P versions.

RCD-blocks

DDA 800 technical features

DDA 800 AC	DDA 800 A		DDA 800 A AP-R	DDA 800 A S	
IEC/EN 60947-2 Ann. B					
AC	A		A	A	
2P, 3P, 4P					
63	63	100	63-100	63	100
0.03-0.3	0.03-0.3-0.5	0.3-0.5	0.03	0.3-1	0.3-0.5*-1
230/400 - 240/415 - 400/690					
690					
195-690					
50...60					
according to the breaking capacity of the associated MCB					
according to the Icu of the associated MCB					
6					
2.5					
NA			3000	5000	
blue operating just from OFF position					
10000					
20000					
IP40					
IP20					
28 cycles with 55°C/90-96% and 25°C/95-100%					
-25...+60					
-40...+70					
6...50					
6...70					
min. 3 / max. 4					
on DIN rail EN 60715 (35 mm) by means of rapid fixing device					
108.2 x 82.3 x 81					
108.2 x 82.3 x 117					
108.2 x 82.3 x 117					
300 for 63 A - 415 for 100 A					
400 for 63 A - 640 for 100 A					
460 for 63 A - 765 for 100 A					
yes					

RCD-blocks

DDA 800 AC ∿ type for MCBs S800

DDA 802

DDA 803

DDA 804

DDA 800 AC type for MCBs S800
Function: RCD-block for assembly on site with MCBs S800 series up to 63 A. Protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with IΔn = 30 mA).

Application: commercial, industrial.
Standard: IEC/EN 60947-2 Ann. B

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	63	919704	DDA802AC-63/0.03	2CSB802001R1630		0.300	1
	300	63	919902	DDA802AC-63/0.3	2CSB802001R3630		0.300	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	63	922001	DDA803AC-63/0.03	2CSB803001R1630		0.400	1
	300	63	922209	DDA803AC-63/0.3	2CSB803001R3630		0.400	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	63	924401	DDA804AC-63/0.03	2CSB804001R1630		0.460	1
	300	63	924609	DDA804AC-63/0.3	2CSB804001R3630		0.460	1

RCD-blocks

DDA 800 A type for MCBs S800

DDA 802

DDA 803

DDA 804

DDA 800 A type for MCBs S800
Function: RCD-block for assembly on site with MCBs S800 up to 100 A. Protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with IΔn = 30 mA).

Application: commercial, industrial.
Standard: IEC/EN 60947-2 Ann. B

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	63	920007	DDA802 A-63/0.03	2CSB802101R1630		0.300	1
	300	63	920205	DDA802 A-63/0.3	2CSB802101R3630		0.300	1
		100	545033	DDA802 A-100/0.3	2CSB802101R3000		0.415	1
	500	63	920403	DDA802 A-63/0.5	2CSB802101R4630		0.300	1
		100	542636	DDA802 A-100/0.5	2CSB802101R4000		0.415	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	63	922308	DDA803 A-63/0.03	2CSB803101R1630		0.400	1
	300	63	922506	DDA803 A-63/0.3	2CSB803101R3630		0.400	1
		100	544135	DDA803 A-100/0.3	2CSB803101R3000		0.640	1
	500	63	922704	DDA803 A-63/0.5	2CSB803101R4630		0.400	1
		100	541738	DDA803 A-100/0.5	2CSB803101R4000		0.640	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	63	924807	DDA804 A-63/0.03	2CSB804101R1630		0.460	1
	300	63	925002	DDA804 A-63/0.3	2CSB804101R3630		0.460	1
		100	547532	DDA804 A-100/0.3	2CSB804101R3000		0.765	1
	500	63	925200	DDA804 A-63/0.5	2CSB804101R4630		0.460	1
		100	544937	DDA804 A-100/0.5	2CSB804101R4000		0.765	1

RCD-blocks

DDA 800 A type AP-R (high immunity) for MCBs S800

DDA 802

DDA 803

DDA 804

DDA 800 A AP-R type for MCBs S800
Function: RCD-block for assembly on site with MCBs S800 up to 100 A. Protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing the best compromise between safety and continuity in the service thanks to the resistance to unwanted trippings; protection against indirect contacts and additional protection against direct contacts (with IΔn = 30 mA).

Application: commercial, industrial.
Standard: IEC/EN 60947-2 Ann. B

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	63	921400	DDA802 A-63/0.03 AP-R	2CSB802401R1630		0.300	1
		100	544630	DDA802 A-100/0.03 AP-R	2CSB802401R1000		0.415	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	63	923800	DDA803 A-63/0.03 AP-R	2CSB803401R1630		0.400	1
		100	542230	DDA803 A-100/0.03 AP-R	2CSB803401R1000		0.640	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	63	927709	DDA804 A-63/0.03 AP-R	2CSB804401R1630		0.460	1
		100	547136	DDA804 A-100/0.03 AP-R	2CSB804401R1000		0.765	1

RCD-blocks

DDA 800 A type selective for MCBs S800

DDA 802

DDA 803

DDA 804

DDA 800 A selective type for MCBs S800
Function: RCD-block for assembly on site with MCBs S800 series up to 100 A. Protection against the effects of sinusoidal alternating and direct pulsating earth fault currents with an intentional tripping delay, which permits to realize the selectivity with downstream instantaneous devices (for more information about selectivity see the technical guide).

Application: commercial, industrial.
Standard: IEC/EN 60947-2 Ann. B

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	300	63	920601	DDA802 A S-63/0.3	2CSB802201R3630		0.300	1
		100	542537	DDA802 A S-100/0.3	2CSB802201R3000		0.415	1
	1000	63	920809	DDA802 A S-63/1	2CSB802201R5630		0.300	1
		100	547433	DDA802 A S-100/1	2CSB802201R5000		0.415	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	300	63	922902	DDA803 A S-63/0.3	2CSB803201R3630		0.400	1
		100	544838	DDA803 A S-100/0.3	2CSB803201R3000		0.640	1
	500	100	542438	DDA803 A S-100/0.5	2CSB803201R4000		0.640	1
	1000	63	923206	DDA803 A S-63/1	2CSB803201R5630		0.400	1
		100	547334	DDA803 A S-100/1	2CSB803201R5000		0.640	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	300	63	926207	DDA804 A S-63/0.3	2CSB804201R3630		0.460	1
		100	544739	DDA804 A S-100/0.3	2CSB804201R3000		0.765	1
	500	100	542339	DDA804 A S-100/0.5	2CSB804201R4000		0.765	1
	1000	63	926504	DDA804 A S-63/1	2CSB804201R5630		0.460	1
		100	547235	DDA804 A S-100/1	2CSB804201R5000		0.765	1

RCBO DS201

Compact solutions for a complete protection

Easy to install
Bi-directional cylindrical terminal ensure higher safety of connecting operations, making them easier.

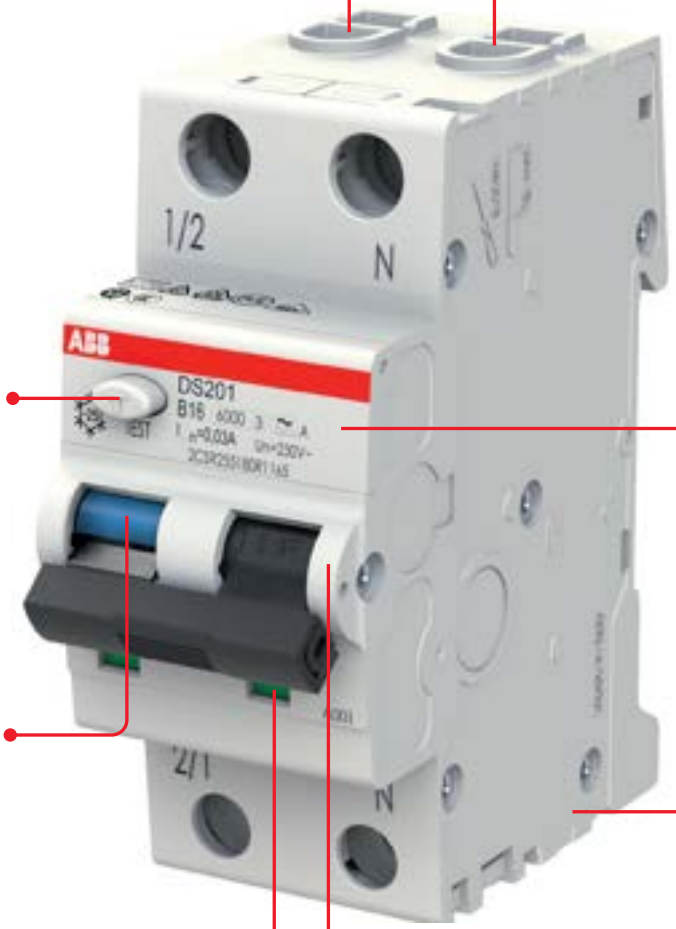

Test pushbutton
Test pushbutton to verify the correct functioning of the device.

Laser printed information
Information on the device are laser printed to ensure readability over time.

Earth fault indicator
Blue flag on the toggle to identify earth fault trips. I 0N – 0 0FF indication molded on the toggle.

Combination with accessories
Improved combination with System pro M compact® accessories, including also the auxiliary contact for bottom fitting and motor operating device.

Contact position indicator (CPI)
To indicate the status of the contacts independently from the toggle position: green (open), red (closed).

Dedicated space for label
Dedicated space to insert labels in order to clearly identify the protected lines.

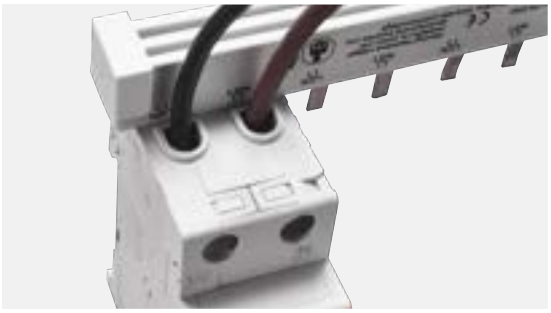

Easy installation
The terminals available on DS201 make easier the supply operation in parallel with cables and busbars as they are composed by two different seats: a front seat for 25 mm² cables and a back seat for 10 mm² busbars. Supply is possible either from top or bottom side.

Mounting clip
Stable fixing on DIN rail, easy and fast mounting and dismounting operations thanks to the standard mounting clip.

Display the operational status
Easy troubleshooting and reduced downtime for maintenance operations thanks to both the blue indicator, that signals the differential tripping to immediately identify any earth fault (it cannot be activated in case of manual operation on the toggle) and the contact position indicator (CPI) that helps to always know the status of the contacts (red: closed contacts; green: open contacts).

Reliable in extreme conditions
RCBO DS201 can be used in ambient conditions where the temperature of the surrounding atmosphere has values between -25 °C (snowflake laser printed on the front of the device) and +55°C.

Additional laser printing
Additional information are laser printed on the lateral side of the device, including also the wiring diagram and the EAN code respectively for easier installation and for easier stock management.

RCBOs

DS201 technical features

				DS201 L	DS201
	Standards			IEC/EN 61009-1; IEC/EN 61009-2-1	IEC/EN 61009-1; IEC/EN 61009-2-1
Electrical features	Type (wave form of the earth leakage sensed)			A - AC - APR	A - AC - APR
	Number of poles			1P + N	1P + N
	Rated current In		A	6 ≤ In ≤ 32	1 ≤ In ≤ 40
	Rated sensitivity IΔn		A	0.01 - 0.03 - 0.3	0.01 - 0.03 - 0.1 - 0.3
	Rated operational voltage Ue		V	230-240	230-240
	Rated Insulation voltage Ui acc. to IEC/EN 60664-1		V	500 V AC	500 V AC
	Overvoltage category			III	III
	Pollution degree			2	2
	Operating voltage of circuit test Ut		V	110 (170 for 30mA) - 264	110 (170 for 30mA) - 264
	Rated frequency f		Hz	50/60	50/60
	Rated short circuit breaking capacity acc. to IEC/EN 61009-1	Icn	A	4500	6000
	Grid distance		mm	35	35
	Rated short circuit breking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate Icu	kA	6	10
		service Ics	kA	4.5	7.5
	Rated residual breaking capacity IΔm according to EN 61009-1	IΔm	A	4500	6000
	Rated residual breaking capacity IΔm according to IEC 61009-1	IΔm	A	4500	6000 up to 25 A; 4500 for 32A and 40A
	Rated impulse withstand voltage Uimp. (1.2/50µs)		kV	4 kV	4 kV
	Dielectric test voltage at ind. freq. for 1 min.		kV	2 kV (50 / 60Hz, 1 min.)	2 kV (50 / 60Hz, 1 min.)
	Tripping characteristic	B: 3 In ≤ In ≤ 5 In			■
		C: 5 In ≤ In ≤ 10 In		■	■
		K: 10 In ≤ In ≤ 14 In			■
	Energy limiting class acc. to EN 61009-1			3	3
	Surge current resistance (wave 8/20)		A	NA for A, AC versions; 3000 for APR version	NA for A, AC versions; 3000 for APR version
Mechanical features	Housing Type			Insulation group I - II, RAL 7035	Insulation group I - II, RAL 7035
	Toggle Type			Insulation group II, Black RAL 9005, sealable in ON-OFF positions	Insulation group II, Black RAL 9005, sealable in ON-OFF positions
	Contact position indication			Green/Red Window	Green/Red Window
	Earth fault trip indication			Blue flag on toggle	Blue flag on toggle
	Electrical Endurance	cycles (OFF-ON-OFF)		10000	10000
	Mechanical Endurance	cycles (OFF-ON-OFF)		20000	20000
	Protection degree acc. to EN 60529	housing		IP40	IP40
		terminals		IP20	IP20
	Resistance to Shock acc. to IEC 60068-2-27			25g - 2 shocks - 13ms	25g - 2 shocks - 13ms
	Resistance to Vibrations acc. to IEC 60068-2-6			0.1 mm or 1 g - 20 cycles at 5…150…5 Hz	0.1 mm or 1 g - 20 cycles at 5…150…5 Hz
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55°C/90-96% and 25°C/95-100%	28 cycles with 55°C/90-96% and 25°C/95-100%
	Reference temperature for tripping characteristics		°C	30	30 (20 for K tripping char)
	Ambient temperature (with daily average ≤ +35 °C)		°C	-25…+55	-25…+55
	Storage temperature		°C	-40…+70	-40…+70

RCBOs

DS201 technical features

DS201 M	**DS201 M 110V**	**DS201 T**
IEC/EN 61009-1; IEC/EN 61009-2-1	IEC 61009-1; IEC 61009-2-1	IEC/EN 61009-1; IEC/EN 61009-2-1
A - AC - APR - F	A	A - APR
1P + N	1P + N	1P + N
4 ≤ In ≤ 40	6 ≤ In ≤ 40	6 ≤ In ≤ 40
0.01 - 0.03 - 0.1 - 0.3	0.03	0.03
230-240	230-240	230-240
500 V AC	500 V AC	500 V AC
III	III	III
2	2	2
110 (170 for 30mA) - 264	110 - 264	170 - 264
50/60	50/60	50/60
10000	10000	6000
35	35	35
15	15	10
11.2	11.2	7.5
6000	6000	6000
6000 up to 25 A; 4500 for 32A and 40A	6000 up to 25 A; 4500 for 32A and 40A	6000 up to 25 A; 4500 for 32A and 40A
4 kV	4 kV	4 kV
2 kV (50 / 60Hz, 1 min.)	2 kV (50 / 60Hz, 1 min.)	2 kV (50 / 60Hz, 1 min.)
■	■	
■	■	■
■		
3	NA	3
NA for A, AC versions; 3000 for APR and F version	NA	NA for A; 3000 for APR version
Insulation group I - II, RAL 7035	Insulation group I - II, RAL 7035	Insulation group I - II, RAL 7035
Insulation group II, Black RAL 9005, sealable in ON-OFF positions	Insulation group II, Black RAL 9005, sealable in ON-OFF positions	Insulation group II, Black RAL 9005, sealable in ON-OFF positions
Green/Red Window	Green/Red Window	Green/Red Window
Blue flag on toggle	Blue flag on toggle	Blue flag on toggle
10000	10000	10000
20000	20000	20000
IP40	IP40	IP40
IP20	IP20	IP20
25g - 2 shocks - 13ms	25g - 2 shocks - 13ms	25g - 2 shocks - 13ms
0.1 mm or 1 g - 20 cycles at 5…150…5 Hz	0.1 mm or 1 g - 20 cycles at 5…150…5 Hz	0.1 mm or 1 g - 20 cycles at 5…150…5 Hz
28 cycles with 55°C/90-96% and 25°C/95-100%	28 cycles with 55°C/90-96% and 25°C/95-100%	28 cycles with 55°C/90-96% and 25°C/95-100%
30 (20 for K tripping char)	30	30
-25…+55	-25…+55	-25…+55
-40…+70	-40…+70	-40…+70

RCBOs

DS201 technical features

					DS201 L	DS201
Installation	Terminal type		top / bottom		failsafe bi-directional cylinder-lift terminal (shock protected)	failsafe bi-directional cylinder-lift terminal (shock protected)
	Cross-section of conductors (IEC)		top / bottom	mm^2	25/25	25/25
	Cross-section of busbars (IEC)		top / bottom	mm^2	10/10	10/10
	Tightening torque		top / bottom	Nm	2.8	2.8
	Wire Stripping Length			mm	12	12
	Screwdriver				No. 2 Pozidrive	No. 2 Pozidrive
	Mounting Type				on DIN rail EN 60715 (35mm) by means of mounting clip	on DIN rail EN 60715 (35mm) by means of mounting clip
	Mounting position				Any	Any
	Supply from				Top/Bottom terminals	Top/Bottom terminals
Dimensions and weight	Dimensions (H x D x W)			mm	85 x 69 x 35	85 x 69 x 35
	Weight			g	200	200
Combination with auxiliary elements	Combinable with accessories and auxiliaries	Auxiliary contact			yes	yes
		Signal contact / auxiliary contact			yes	yes
		Shunt trip			yes	yes
		Auxiliary contact for bottom fitting			yes	yes
		Undervoltage release			yes	yes
		Overvoltage release			yes	yes
		Motor operating device			yes	yes

RCBOs

DS201 technical features

DS201 M	**DS201 M 110V**	**DS201 T**
failsafe bi-directional cylinder-lift terminal (shock protected)	failsafe bi-directional cylinder-lift terminal (shock protected)	failsafe bi-directional cylinder-lift terminal (shock protected)
25/25	25/25	25/25
10/10	10/10	10.X
2.8	2.8	02.VIII
12	12	12
No. 2 Pozidrive	No. 2 Pozidrive	No. 2 Pozidrive
on DIN rail EN 60715 (35mm) by means of mounting clip	on DIN rail EN 60715 (35mm) by means of mounting clip	on DIN rail EN 60715 (35mm) by means of mounting clip
Any	Any	Any
Top/Bottom terminals	Top/Bottom terminals	Top/Bottom terminals
85 x 69 x 35	85 x 69 x 35	85 x 69 x 35
200	200	200
yes	yes	yes
yes	yes	yes
yes	yes	yes
yes	yes	yes
yes	yes	yes
yes	yes	yes
yes	yes	yes

RCBOs

DS201 L series 4500 A type, C characteristic

DS201 L

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 4500 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	10	6	637318	DS201 L C6 A10	2CSR245180R0064		0.2	1
		10	637011	DS201 L C10 A10	2CSR245180R0104		0.2	1
		16	637110	DS201 L C16 A10	2CSR245180R0164		0.2	1
	30	6	636717	DS201 L C6 A30	2CSR245180R1064		0.2	1
		10	636816	DS201 L C10 A30	2CSR245180R1104		0.2	1
		16	636915	DS201 L C16 A30	2CSR245180R1164		0.2	1
		20	638216	DS201 L C20 A30	2CSR245180R1204		0.2	1
		25	638315	DS201 L C25 A30	2CSR245180R1254		0.2	1
		32	638018	DS201 L C32 A30	2CSR245180R1324		0.2	1
	300	6	638117	DS201 L C6 A300	2CSR245180R3064		0.2	1
		10	638919	DS201 L C10 A300	2CSR245180R3104		0.2	1
		16	639114	DS201 L C16 A300	2CSR245180R3164		0.2	1
		20	638810	DS201 L C20 A300	2CSR245180R3204		0.2	1
		25	638612	DS201 L C25 A300	2CSR245180R3254		0.2	1
		32	639312	DS201 L C32 A300	2CSR245180R3324		0.2	1

RCBOs

DS201 L 4500 AC type, C characteristic

DS201 L

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 4500 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	043515	DS201 L C6 AC30	2CSR245080R1064		0.2	1
		10	043416	DS201 L C10 AC30	2CSR245080R1104		0.2	1
		16	030218	DS201 L C16 AC30	2CSR245080R1164		0.2	1
		20	030010	DS201 L C20 AC30	2CSR245080R1204		0.2	1
		25	030119	DS201 L C25 AC30	2CSR245080R1254		0.2	1
		32	637615	DS201 L C32 AC30	2CSR245080R1324		0.2	1
	300	6	637714	DS201 L C6 AC300	2CSR245080R3064		0.2	1
		10	637417	DS201 L C10 AC300	2CSR245080R3104		0.2	1
		16	637516	DS201 L C16 AC300	2CSR245080R3164		0.2	1
		20	637813	DS201 L C20 AC300	2CSR245080R3204		0.2	1
		25	637912	DS201 L C25 AC300	2CSR245080R3254		0.2	1
		32	637219	DS201 L C32 AC300	2CSR245080R3324		0.2	1

DS201 L 4500 APR type, C characteristic

DS201 L

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal trade-off between safety and continuity of service, thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct contact (IΔn=30mA); protection and isolation of resistive and inductive loads.

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 4500 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	639411	DS201 L C6 APR30	2CSR245480R1064		0.2	1
		10	638711	DS201 L C10 APR30	2CSR245480R1104		0.2	1
		16	639619	DS201 L C16 APR30	2CSR245480R1164		0.2	1
		20	639213	DS201 L C20 APR30	2CSR245480R1204		0.2	1
		25	639510	DS201 L C25 APR30	2CSR245480R1254		0.2	1
		32	639015	DS201 L C32 APR30	2CSR245480R1324		0.2	1

RCBOs

DS201 6000 A type, B characteristic

DS201

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	10	10	065913	DS201 B10 A10	2CSR255180R0105		0.2	1
		13	065814	DS201 B13 A10	2CSR255180R0135		0.2	1
		16	066316	DS201 B16 A10	2CSR255180R0165		0.2	1
	30	6	066217	DS201 B6 A30	2CSR255180R1065		0.2	1
		10	066118	DS201 B10 A30	2CSR255180R1105		0.2	1
		13	058113	DS201 B13 A30	2CSR255180R1135		0.2	1
		16	058519	DS201 B16 A30	2CSR255180R1165		0.2	1
		20	969815	DS201 B20 A30	2CSR255180R1205		0.2	1
		25	969716	DS201 B25 A30	2CSR255180R1255		0.2	1
		32	970019	DS201 B32 A30	2CSR255180R1325		0.2	1
		40	969914	DS201 B40 A30	2CSR255180R1405		0.2	1
	100	6	779414	DS201 B6 A100	2CSR255180R2065		0.2	1
		10	790211	DS201 B10 A100	2CSR255180R2105		0.2	1
		13	779810	DS201 B13 A100	2CSR255180R2135		0.2	1
		16	779711	DS201 B16 A100	2CSR255180R2165		0.2	1
		20	779612	DS201 B20 A100	2CSR255180R2205		0.2	1
		25	779513	DS201 B25 A100	2CSR255180R2255		0.2	1
		32	372011	DS201 B32 A100	2CSR255180R2325		0.2	1
		40	023913	DS201 B40 A100	2CSR255180R2405		0.2	1
	300	6	070313	DS201 B6 A300	2CSR255180R3065		0.2	1
		10	643616	DS201 B10 A300	2CSR255180R3105		0.2	1
		13	643418	DS201 B13 A300	2CSR255180R3135		0.2	1
		16	643517	DS201 B16 A300	2CSR255180R3165		0.2	1
		20	643814	DS201 B20 A300	2CSR255180R3205		0.2	1
		25	643715	DS201 B25 A300	2CSR255180R3255		0.2	1
		32	643319	DS201 B32 A300	2CSR255180R3325		0.2	1
		40	965312	DS201 B40 A300	2CSR255180R3405		0.2	1

RCBOs

DS201 6000 A type, C characteristic

DS201

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	10	10	738817	DS201 C10 A10	2CSR255180R0104		0.2	1
		13	738015	DS201 C13 A10	2CSR255180R0134		0.2	1
		16	739418	DS201 C16 A10	2CSR255180R0164		0.2	1
	30	2	738718	DS201 C2 A30	2CSR255180R1024		0.2	1
		4	737919	DS201 C4 A30	2CSR255180R1044		0.2	1
		6	737117	DS201 C6 A30	2CSR255180R1064		0.2	1
		8	738619	DS201 C8 A30	2CSR255180R1084		0.2	1
		10	737810	DS201 C10 A30	2CSR255180R1104		0.2	1
		13	737018	DS201 C13 A30	2CSR255180R1134		0.2	1
		16	739319	DS201 C16 A30	2CSR255180R1164		0.2	1
		20	738510	DS201 C20 A30	2CSR255180R1204		0.2	1
		25	737711	DS201 C25 A30	2CSR255180R1254		0.2	1
		32	737612	DS201 C32 A30	2CSR255180R1324		0.2	1
		40	738411	DS201 C40 A30	2CSR255180R1404		0.2	1
	100	6	739012	DS201 C6 A100	2CSR255180R2064		0.2	1
		10	738213	DS201 C10 A100	2CSR255180R2104		0.2	1
		13	737315	DS201 C13 A100	2CSR255180R2134		0.2	1
		16	738916	DS201 C16 A100	2CSR255180R2164		0.2	1
		20	738114	DS201 C20 A100	2CSR255180R2204		0.2	1
		25	737216	DS201 C25 A100	2CSR255180R2254		0.2	1
		32	747215	DS201 C32 A100	2CSR255180R2324		0.2	1
		40	747116	DS201 C40 A100	2CSR255180R2404		0.2	1
	300	2	739210	DS201 C2 A300	2CSR255180R3024		0.2	1
		4	062714	DS201 C4 A300	2CSR255180R3044		0.2	1
		6	007814	DS201 C6 A300	2CSR255180R3064		0.2	1
		8	007715	DS201 C8 A300	2CSR255180R3084		0.2	1
		10	062615	DS201 C10 A300	2CSR255180R3104		0.2	1
		13	886716	DS201 C13 A300	2CSR255180R3134		0.2	1
		16	886815	DS201 C16 A300	2CSR255180R3164		0.2	1
		20	886617	DS201 C20 A300	2CSR255180R3204		0.2	1
		25	886310	DS201 C25 A300	2CSR255180R3254		0.2	1
		32	886211	DS201 C32 A300	2CSR255180R3324		0.2	1
		40	326311	DS201 C40 A300	2CSR255180R3404		0.2	1

RCBOs

DS201 6000 A type, K characteristic

DS201

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	10	10	647515	DS201 K10 A10	2CSR255180R0107		0.2	1
		13	061717	DS201 K13 A10	2CSR255180R0137		0.2	1
		16	295419	DS201 K16 A10	2CSR255180R0167		0.2	1
	30	1	295310	DS201 K1 A30	2CSR255180R1017		0.2	1
		2	498513	DS201 K2 A30	2CSR255180R1027		0.2	1
		4	305415	DS201 K4 A30	2CSR255180R1047		0.2	1
		6	647614	DS201 K6 A30	2CSR255180R1067		0.2	1
		8	643913	DS201 K8 A30	2CSR255180R1087		0.2	1
		10	587712	DS201 K10 A30	2CSR255180R1107		0.2	1
		13	575917	DS201 K13 A30	2CSR255180R1137		0.2	1
		16	564119	DS201 K16 A30	2CSR255180R1167		0.2	1
		20	586814	DS201 K20 A30	2CSR255180R1207		0.2	1
		25	575016	DS201 K25 A30	2CSR255180R1257		0.2	1
		32	563211	DS201 K32 A30	2CSR255180R1327		0.2	1
		40	775911	DS201 K40 A30	2CSR255180R1407		0.2	1
	300	1	773719	DS201 K1 A300	2CSR255180R3017		0.2	1
		2	771517	DS201 K2 A300	2CSR255180R3027		0.2	1
		4	587613	DS201 K4 A300	2CSR255180R3047		0.2	1
		6	575818	DS201 K6 A300	2CSR255180R3067		0.2	1
		8	564010	DS201 K8 A300	2CSR255180R3087		0.2	1
		10	586715	DS201 K10 A300	2CSR255180R3107		0.2	1
		13	574910	DS201 K13 A300	2CSR255180R3137		0.2	1
		16	563112	DS201 K16 A300	2CSR255180R3167		0.2	1
		20	775812	DS201 K20 A300	2CSR255180R3207		0.2	1
		25	773610	DS201 K25 A300	2CSR255180R3257		0.2	1
		32	771418	DS201 K32 A300	2CSR255180R3327		0.2	1
		40	587514	DS201 K40 A300	2CSR255180R3407		0.2	1

RCBOs

DS201 6000 AC type, B characteristic

DS201

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	274315	DS201 B6 AC30	2CSR255080R1065		0.2	1
		10	333913	DS201 B10 AC30	2CSR255080R1105		0.2	1
		13	508014	DS201 B13 AC30	2CSR255080R1135		0.2	1
		16	295815	DS201 B16 AC30	2CSR255080R1165		0.2	1
		20	295617	DS201 B20 AC30	2CSR255080R1205		0.2	1
		25	965213	DS201 B25 AC30	2CSR255080R1255		0.2	1
		32	963011	DS201 B32 AC30	2CSR255080R1325		0.2	1
		40	964919	DS201 B40 AC30	2CSR255080R1405		0.2	1
	100	6	965114	DS201 B6 AC100	2CSR255080R2065		0.2	1
		10	295716	DS201 B10 AC100	2CSR255080R2105		0.2	1
		13	649410	DS201 B13 AC100	2CSR255080R2135		0.2	1
		16	649311	DS201 B16 AC100	2CSR255080R2165		0.2	1
		20	649212	DS201 B20 AC100	2CSR255080R2205		0.2	1
		25	649113	DS201 B25 AC100	2CSR255080R2255		0.2	1
		32	649519	DS201 B32 AC100	2CSR255080R2325		0.2	1
		40	027911	DS201 B40 AC100	2CSR255080R2405		0.2	1
	300	6	027812	DS201 B6 AC300	2CSR255080R3065		0.2	1
		10	007210	DS201 B10 AC300	2CSR255080R3105		0.2	1
		13	007111	DS201 B13 AC300	2CSR255080R3135		0.2	1
		16	644118	DS201 B16 AC300	2CSR255080R3165		0.2	1
		20	644019	DS201 B20 AC300	2CSR255080R3205		0.2	1
		25	644316	DS201 B25 AC300	2CSR255080R3255		0.2	1
		32	644217	DS201 B32 AC300	2CSR255080R3325		0.2	1
		40	066019	DS201 B40 AC300	2CSR255080R3405		0.2	1

RCBOs

DS201 6000 AC type, C characteristic

DS201

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	896319	DS201 C6 AC30	2CSR255080R1064		0.2	1
		10	049418	DS201 C10 AC30	2CSR255080R1104		0.2	1
		13	049319	DS201 C13 AC30	2CSR255080R1134		0.2	1
		16	049210	DS201 C16 AC30	2CSR255080R1164		0.2	1
		20	049111	DS201 C20 AC30	2CSR255080R1204		0.2	1
		25	049012	DS201 C25 AC30	2CSR255080R1254		0.2	1
		32	048916	DS201 C32 AC30	2CSR255080R1324		0.2	1
		40	048817	DS201 C40 AC30	2CSR255080R1404		0.2	1
	100	6	048718	DS201 C6 AC100	2CSR255080R2064		0.2	1
		10	048619	DS201 C10 AC100	2CSR255080R2104		0.2	1
		13	048510	DS201 C13 AC100	2CSR255080R2134		0.2	1
		16	048411	DS201 C16 AC100	2CSR255080R2164		0.2	1
		20	048312	DS201 C20 AC100	2CSR255080R2204		0.2	1
		25	048213	DS201 C25 AC100	2CSR255080R2254		0.2	1
		32	048114	DS201 C32 AC100	2CSR255080R2324		0.2	1
		40	048015	DS201 C40 AC100	2CSR255080R2404		0.2	1
	300	6	047919	DS201 C6 AC300	2CSR255080R3064		0.2	1
		10	047810	DS201 C10 AC300	2CSR255080R3104		0.2	1
		13	047711	DS201 C13 AC300	2CSR255080R3134		0.2	1
		16	047612	DS201 C16 AC300	2CSR255080R3164		0.2	1
		20	049814	DS201 C20 AC300	2CSR255080R3204		0.2	1
		25	049715	DS201 C25 AC300	2CSR255080R3254		0.2	1
		32	049616	DS201 C32 AC300	2CSR255080R3324		0.2	1
		40	049517	DS201 C40 AC300	2CSR255080R3404		0.2	1

RCBOs

DS201 6000 APR type, C characteristic

DS201

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal trade-off between safety and continuity of service thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct contact (IΔn=30 mA); protection and isolation of resistive and inductive loads.

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	326212	DS201 C6 APR30	2CSR255480R1064		0.2	1
		10	399612	DS201 C10 APR30	2CSR255480R1104		0.2	1
		13	399711	DS201 C13 APR30	2CSR255480R1134		0.2	1
		16	658917	DS201 C16 APR30	2CSR255480R1164		0.2	1
		20	658412	DS201 C20 APR30	2CSR255480R1204		0.2	1
		25	659914	DS201 C25 APR30	2CSR255480R1254		0.2	1
		32	659419	DS201 C32 APR30	2CSR255480R1324		0.2	1
		40	658610	DS201 C40 APR30	2CSR255480R1404		0.2	1
	100	6	658115	DS201 C6 APR100	2CSR255480R2064		0.2	1
		10	659617	DS201 C10 APR100	2CSR255480R2104		0.2	1
		13	910916	DS201 C13 APR100	2CSR255480R2134		0.2	1
		16	659112	DS201 C16 APR100	2CSR255480R2164		0.2	1
		20	658719	DS201 C20 APR100	2CSR255480R2204		0.2	1
		25	658214	DS201 C25 APR100	2CSR255480R2254		0.2	1
		32	659716	DS201 C32 APR100	2CSR255480R2324		0.2	1
		40	659211	DS201 C40 APR100	2CSR255480R2404		0.2	1
	300	6	658818	DS201 C6 APR300	2CSR255480R3064		0.2	1
		10	658313	DS201 C10 APR300	2CSR255480R3104		0.2	1
		13	659815	DS201 C13 APR300	2CSR255480R3134		0.2	1
		16	659310	DS201 C16 APR300	2CSR255480R3164		0.2	1
		20	658511	DS201 C20 APR300	2CSR255480R3204		0.2	1
		25	658016	DS201 C25 APR300	2CSR255480R3254		0.2	1
		32	659518	DS201 C32 APR300	2CSR255480R3324		0.2	1
		40	910817	DS201 C40 APR300	2CSR255480R3404		0.2	1

RCBOs

DS201 M 10000 A type, B characteristic

DS201 M

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	10	10	574613	DS201 M B10 A10	2CSR275180R0105		0.2	1
		16	562818	DS201 M B16 A10	2CSR275180R0165		0.2	1
	30	6	775515	DS201 M B6 A30	2CSR275180R1065		0.2	1
		10	773313	DS201 M B10 A30	2CSR275180R1105		0.2	1
		13	771111	DS201 M B13 A30	2CSR275180R1135		0.2	1
		16	587217	DS201 M B16 A30	2CSR275180R1165		0.2	1
		20	575412	DS201 M B20 A30	2CSR275180R1205		0.2	1
		25	563617	DS201 M B25 A30	2CSR275180R1255		0.2	1
		32	586319	DS201 M B32 A30	2CSR275180R1325		0.2	1
		40	574514	DS201 M B40 A30	2CSR275180R1405		0.2	1
	100	6	562719	DS201 M B6 A100	2CSR275180R2065		0.2	1
		10	775416	DS201 M B10 A100	2CSR275180R2105		0.2	1
		13	773214	DS201 M B13 A100	2CSR275180R2135		0.2	1
		16	771012	DS201 M B16 A100	2CSR275180R2165		0.2	1
		20	587118	DS201 M B20 A100	2CSR275180R2205		0.2	1
		25	575313	DS201 M B25 A100	2CSR275180R2255		0.2	1
		32	563518	DS201 M B32 A100	2CSR275180R2325		0.2	1
		40	586210	DS201 M B40 A100	2CSR275180R2405		0.2	1
	300	6	574415	DS201 M B6 A300	2CSR275180R3065		0.2	1
		10	562610	DS201 M B10 A300	2CSR275180R3105		0.2	1
		13	775317	DS201 M B13 A300	2CSR275180R3135		0.2	1
		16	773115	DS201 M B16 A300	2CSR275180R3165		0.2	1
		20	770916	DS201 M B20 A300	2CSR275180R3205		0.2	1
		25	587019	DS201 M B25 A300	2CSR275180R3255		0.2	1
		32	575214	DS201 M B32 A300	2CSR275180R3325		0.2	1
		40	563419	DS201 M B40 A300	2CSR275180R3405		0.2	1

RCBOs

DS201 M 10000 A type, C characteristic

DS201 M

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	10	10	594116	DS201 M C10 A10	2CSR275180R0104		0.2	1
		16	582311	DS201 M C16 A10	2CSR275180R0164		0.2	1
	30	4	570516	DS201 M C4 A30	2CSR275180R1044		0.2	1
		6	595410	DS201 M C6 A30	2CSR275180R1064		0.2	1
		10	583615	DS201 M C10 A30	2CSR275180R1104		0.2	1
		13	571810	DS201 M C13 A30	2CSR275180R1134		0.2	1
		16	592815	DS201 M C16 A30	2CSR275180R1164		0.2	1
		20	581017	DS201 M C20 A30	2CSR275180R1204		0.2	1
		25	569213	DS201 M C25 A30	2CSR275180R1254		0.2	1
		32	594017	DS201 M C32 A30	2CSR275180R1324		0.2	1
		40	582212	DS201 M C40 A30	2CSR275180R1404		0.2	1
	100	6	570417	DS201 M C6 A100	2CSR275180R2064		0.2	1
		10	595311	DS201 M C10 A100	2CSR275180R2104		0.2	1
		16	583516	DS201 M C16 A100	2CSR275180R2164		0.2	1
		20	571711	DS201 M C20 A100	2CSR275180R2204		0.2	1
		25	593911	DS201 M C25 A100	2CSR275180R2254		0.2	1
		32	582113	DS201 M C32 A100	2CSR275180R2324		0.2	1
		40	570318	DS201 M C40 A100	2CSR275180R2404		0.2	1
	300	6	595212	DS201 M C6 A300	2CSR275180R3064		0.2	1
		10	583417	DS201 M C10 A300	2CSR275180R3104		0.2	1
		13	571612	DS201 M C13 A300	2CSR275180R3134		0.2	1
		16	592716	DS201 M C16 A300	2CSR275180R3164		0.2	1
		20	580911	DS201 M C20 A300	2CSR275180R3204		0.2	1
		25	569114	DS201 M C25 A300	2CSR275180R3254		0.2	1
		32	593812	DS201 M C32 A300	2CSR275180R3324		0.2	1
		40	582014	DS201 M C40 A300	2CSR275180R3404		0.2	1

RCBOs

DS201 M 10000 A type, K characteristic

DS201 M

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents.

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	100	6	568919	DS201 M K6 A100	2CSR275180R2067		0.2	1
		10	593515	DS201 M K10 A100	2CSR275180R2107		0.2	1
		13	581710	DS201 M K13 A100	2CSR275180R2137		0.2	1
		16	569916	DS201 M K16 A100	2CSR275180R2167		0.2	1
		20	594819	DS201 M K20 A100	2CSR275180R2207		0.2	1
		25	583011	DS201 M K25 A100	2CSR275180R2257		0.2	1
		32	571216	DS201 M K32 A100	2CSR275180R2327		0.2	1
		40	593416	DS201 M K40 A100	2CSR275180R2407		0.2	1

RCBOs

DS201 M 10000 AC type, B characteristic

DS201 M

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	575719	DS201 M B6 AC30	2CSR275080R1065		0.2	1
		10	563914	DS201 M B10 AC30	2CSR275080R1105		0.2	1
		13	586616	DS201 M B13 AC30	2CSR275080R1135		0.2	1
		16	574811	DS201 M B16 AC30	2CSR275080R1165		0.2	1
		20	563013	DS201 M B20 AC30	2CSR275080R1205		0.2	1
		25	775713	DS201 M B25 AC30	2CSR275080R1255		0.2	1
		32	773511	DS201 M B32 AC30	2CSR275080R1325		0.2	1
		40	771319	DS201 M B40 AC30	2CSR275080R1405		0.2	1
	100	6	775010	DS201 M B6 AC100	2CSR275080R2065		0.2	1
		10	772811	DS201 M B10 AC100	2CSR275080R2105		0.2	1
		13	770619	DS201 M B13 AC100	2CSR275080R2135		0.2	1
		16	587415	DS201 M B16 AC100	2CSR275080R2165		0.2	1
		20	575610	DS201 M B20 AC100	2CSR275080R2205		0.2	1
		25	563815	DS201 M B25 AC100	2CSR275080R2255		0.2	1
		32	586517	DS201 M B32 AC100	2CSR275080R2325		0.2	1
		40	574712	DS201 M B40 AC100	2CSR275080R2405		0.2	1
	300	6	562917	DS201 M B6 AC300	2CSR275080R3065		0.2	1
		10	775614	DS201 M B10 AC300	2CSR275080R3105		0.2	1
		13	773412	DS201 M B13 AC300	2CSR275080R3135		0.2	1
		16	771210	DS201 M B16 AC300	2CSR275080R3165		0.2	1
		20	587316	DS201 M B20 AC300	2CSR275080R3205		0.2	1
		25	575511	DS201 M B25 AC300	2CSR275080R3255		0.2	1
		32	563716	DS201 M B32 AC300	2CSR275080R3325		0.2	1
		40	586418	DS201 M B40 AC300	2CSR275080R3405		0.2	1

RCBOs

DS201 M 10000 AC type, C characteristic

DS201 M

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	586111	DS201 M C6 AC30	2CSR275080R1064		0.2	1
		10	574316	DS201 M C10 AC30	2CSR275080R1104		0.2	1
		13	562511	DS201 M C13 AC30	2CSR275080R1134		0.2	1
		16	775218	DS201 M C16 AC30	2CSR275080R1164		0.2	1
		20	773016	DS201 M C20 AC30	2CSR275080R1204		0.2	1
		25	770817	DS201 M C25 AC30	2CSR275080R1254		0.2	1
		32	910015	DS201 M C32 AC30	2CSR275080R1324		0.2	1
		40	909811	DS201 M C40 AC30	2CSR275080R1404		0.2	1
	100	6	909613	DS201 M C6 AC100	2CSR275080R2064		0.2	1
		10	587811	DS201 M C10 AC100	2CSR275080R2104		0.2	1
		13	576013	DS201 M C13 AC100	2CSR275080R2134		0.2	1
		16	564218	DS201 M C16 AC100	2CSR275080R2164		0.2	1
		20	586913	DS201 M C20 AC100	2CSR275080R2204		0.2	1
		25	575115	DS201 M C25 AC100	2CSR275080R2254		0.2	1
		32	563310	DS201 M C32 AC100	2CSR275080R2324		0.2	1
		40	586012	DS201 M C40 AC100	2CSR275080R2404		0.2	1
	300	6	574217	DS201 M C6 AC300	2CSR275080R3064		0.2	1
		10	562412	DS201 M C10 AC300	2CSR275080R3104		0.2	1
		13	775119	DS201 M C13 AC300	2CSR275080R3134		0.2	1
		16	772910	DS201 M C16 AC300	2CSR275080R3164		0.2	1
		20	770718	DS201 M C20 AC300	2CSR275080R3204		0.2	1
		25	774914	DS201 M C25 AC300	2CSR275080R3254		0.2	1
		32	772712	DS201 M C32 AC300	2CSR275080R3324		0.2	1
		40	770510	DS201 M C40 AC300	2CSR275080R3404		0.2	1

RCBOs

DS201 M 10000 APR type, C characteristic

DS201 M

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal compromise between safety and continuity of service, thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct contact (IΔn=30 mA); protection and isolation of resistive and inductive loads.

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	570219	DS201 M C6 APR30	2CSR275480R1064		0.2	1
		10	591917	DS201 M C10 APR30	2CSR275480R1104		0.2	1
		13	580119	DS201 M C13 APR30	2CSR275480R1134		0.2	1
		16	568315	DS201 M C16 APR30	2CSR275480R1164		0.2	1
		20	595113	DS201 M C20 APR30	2CSR275480R1204		0.2	1
		25	583318	DS201 M C25 APR30	2CSR275480R1254		0.2	1
		32	571513	DS201 M C32 APR30	2CSR275480R1324		0.2	1
		40	592617	DS201 M C40 APR30	2CSR275480R1404		0.2	1
	100	6	580812	DS201 M C6 APR100	2CSR275480R2064		0.2	1
		10	569015	DS201 M C10 APR100	2CSR275480R2104		0.2	1
		13	593713	DS201 M C13 APR100	2CSR275480R2134		0.2	1
		16	581918	DS201 M C16 APR100	2CSR275480R2164		0.2	1
		20	570110	DS201 M C20 APR100	2CSR275480R2204		0.2	1
		25	595014	DS201 M C25 APR100	2CSR275480R2254		0.2	1
		32	583219	DS201 M C32 APR100	2CSR275480R2324		0.2	1
		40	571414	DS201 M C40 APR100	2CSR275480R2404		0.2	1
	300	6	593614	DS201 M C6 APR300	2CSR275480R3064		0.2	1
		10	581819	DS201 M C10 APR300	2CSR275480R3104		0.2	1
		13	570011	DS201 M C13 APR300	2CSR275480R3134		0.2	1
		16	594918	DS201 M C16 APR300	2CSR275480R3164		0.2	1
		20	583110	DS201 M C20 APR300	2CSR275480R3204		0.2	1
		25	571315	DS201 M C25 APR300	2CSR275480R3254		0.2	1
		32	592518	DS201 M C32 APR300	2CSR275480R3324		0.2	1
		40	580713	DS201 M C40 APR300	2CSR275480R3404		0.2	1

RCBOs

DS201 M 10000 F type, B characteristic

DS201 M

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA). Specifically suitable for the protection of lines supplying single phase inverters.

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1; IEC/EN 62423
Icn = 10000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	10	10	569411	DS201 M B10 F10	2CSR275580R0105		0.2	1
		13	594314	DS201 M B13 F10	2CSR275580R0135		0.2	1
		16	582519	DS201 M B16 F10	2CSR275580R0165		0.2	1
	30	6	594413	DS201 M B6 F30	2CSR275580R1065		0.2	1
		10	582618	DS201 M B10 F30	2CSR275580R1105		0.2	1
		13	570813	DS201 M B13 F30	2CSR275580R1135		0.2	1
		16	595717	DS201 M B16 F30	2CSR275580R1165		0.2	1
		20	583912	DS201 M B20 F30	2CSR275580R1205		0.2	1
		25	572114	DS201 M B25 F30	2CSR275580R1255		0.2	1
		32	592112	DS201 M B32 F30	2CSR275580R1325		0.2	1
		40	580317	DS201 M B40 F30	2CSR275580R1405		0.2	1

DS201 M 10000 F type, C characteristic

DS201 M

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA). Specifically suitable for the protection of lines supplying single phase inverters.

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1; IEC/EN 62423
Icn = 10000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	10	10	568513	DS201 M C10 F10	2CSR275580R0104		0.2	1
		13	593010	DS201 M C13 F10	2CSR275580R0134		0.2	1
		16	581215	DS201 M C16 F10	2CSR275580R0164		0.2	1
	30	6	580416	DS201 M C6 F30	2CSR275580R1064		0.2	1
		10	568612	DS201 M C10 F30	2CSR275580R1104		0.2	1
		13	595816	DS201 M C13 F30	2CSR275580R1134		0.2	1
		16	584018	DS201 M C16 F30	2CSR275580R1164		0.2	1
		20	572213	DS201 M C20 F30	2CSR275580R1204		0.2	1
		25	593119	DS201 M C25 F30	2CSR275580R1254		0.2	1
		32	581314	DS201 M C32 F30	2CSR275580R1324		0.2	1
		40	569510	DS201 M C40 F30	2CSR275580R1404		0.2	1

RCBOs

DS201 M 110V 10000 A type, B characteristic

DS201 M 110V

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).
This particular series of devices has the minimum operating voltage of test button of 110 V and it is suitable for 230 V applications.

Application: residential, commercial, industrial.
Standard: IEC 61009-1; IEC 61009-2-1
Icn = 10000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	582410	DS201 M B6 A30 110V	2CSR275189R1065		0.2	1
		10	570615	DS201 M B10 A30 110V	2CSR275189R1105		0.2	1
		13	592013	DS201 M B13 A30 110V	2CSR275189R1135		0.2	1
		16	580218	DS201 M B16 A30 110V	2CSR275189R1165		0.2	1
		20	568414	DS201 M B20 A30 110V	2CSR275189R1205		0.2	1
		25	595519	DS201 M B25 A30 110V	2CSR275189R1255		0.2	1
		32	583714	DS201 M B32 A30 110V	2CSR275189R1325		0.2	1
		40	571919	DS201 M B40 A30 110V	2CSR275189R1405		0.2	1

DS201 M 110V 10000 A type, C characteristic

DS201 M 110V

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).
This particular series of devices has the minimum operating voltage of test button of 110 V and it is suitable for 230 V applications.

Application: residential, commercial, industrial.
Standard: IEC 61009-1; IEC 61009-2-1
Icn = 10000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	570714	DS201 M C6 A30 110V	2CSR275189R1064		0.2	1
		10	595618	DS201 M C10 A30 110V	2CSR275189R1104		0.2	1
		13	583813	DS201 M C13 A30 110V	2CSR275189R1134		0.2	1
		15	427957	DS201 M C15 A30 110V	2CSR275189R1154		0.2	1
		16	572015	DS201 M C16 A30 110V	2CSR275189R1164		0.2	1
		20	592914	DS201 M C20 A30 110V	2CSR275189R1204		0.2	1
		25	581116	DS201 M C25 A30 110V	2CSR275189R1254		0.2	1
		32	569312	DS201 M C32 A30 110V	2CSR275189R1324		0.2	1
		40	594215	DS201 M C40 A30 110V	2CSR275189R1404		0.2	1

RCBOs

DS201 T 6000 A type, C characteristic

DS201 T

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: railway, rolling stock, traction.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	565215	DS201T C6 A30	2CSR255188R1064		0.2	1
		10	590019	DS201T C10 A30	2CSR255188R1104		0.2	1
		13	578215	DS201T C13 A30	2CSR255188R1134		0.2	1
		16	566410	DS201T C16 A30	2CSR255188R1164		0.2	1
		20	591313	DS201T C20 A30	2CSR255188R1204		0.2	1
		25	579519	DS201T C25 A30	2CSR255188R1254		0.2	1
		32	567714	DS201T C32 A30	2CSR255188R1324		0.2	1
		40	589914	DS201T C40 A30	2CSR255188R1404		0.2	1

RCBOs

DS201 T 6000 A type, K characteristics

DS201 T

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: railway, rolling stock, traction.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	589815	DS201T K6 A30	2CSR255188R1067		0.2	1
		10	578017	DS201T K10 A30	2CSR255188R1107		0.2	1
		13	566212	DS201T K13 A30	2CSR255188R1137		0.2	1
		16	587910	DS201T K16 A30	2CSR255188R1167		0.2	1
		20	576112	DS201T K20 A30	2CSR255188R1207		0.2	1
		25	564317	DS201T K25 A30	2CSR255188R1257		0.2	1
		32	591115	DS201T K32 A30	2CSR255188R1327		0.2	1
		40	579311	DS201T K40 A30	2CSR255188R1407		0.2	1

RCBOs

DS201 T 6000 APR type, C characteristic

DS201 T

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal trade-off between safety and continuity of service thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct contact (IΔn=30 mA); protection and isolation of resistive and inductive loads.

Application: railway, rolling stock, traction.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	567516	DS201T C6 APR30	2CSR255488R1064		0.2	1
		10	588610	DS201T C10 APR30	2CSR255488R1104		0.2	1
		13	576815	DS201T C13 APR30	2CSR255488R1134		0.2	1
		16	565017	DS201T C16 APR30	2CSR255488R1164		0.2	1
		20	589716	DS201T C20 APR30	2CSR255488R1204		0.2	1
		25	577911	DS201T C25 APR30	2CSR255488R1254		0.2	1
		32	566113	DS201T C32 APR30	2CSR255488R1324		0.2	1
		40	591016	DS201T C40 APR30	2CSR255488R1404		0.2	1

RCBOs

DS201 T 6000 APR type, B characteristic

DS201 T

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal compromise between safety and continuity of service, thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct contact (IΔn=30 mA); protection and isolation of resistive and inductive loads.

Application: railway, rolling stock, traction.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	579212	DS201T B6 APR30	2CSR255488R1065		0.2	1
		10	567417	DS201T B10 APR30	2CSR255488R1105		0.2	1
		13	589617	DS201T B13 APR30	2CSR255488R1135		0.2	1
		16	577812	DS201T B16 APR30	2CSR255488R1165		0.2	1
		20	566014	DS201T B20 APR30	2CSR255488R1205		0.2	1
		25	590910	DS201T B25 APR30	2CSR255488R1255		0.2	1
		32	579113	DS201T B32 APR30	2CSR255488R1325		0.2	1
		40	567318	DS201T B40 APR30	2CSR255488R1405		0.2	1

RCBOs

DS201 T 6000 A type, B characteristic

DS201 T

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: railway, rolling stock, traction.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	578116	DS201T B6 A30	2CSR255188R1065		0.2	1
		10	566311	DS201T B10 A30	2CSR255188R1105		0.2	1
		13	591214	DS201T B13 A30	2CSR255188R1135		0.2	1
		16	579410	DS201T B16 A30	2CSR255188R1165		0.2	1
		20	567615	DS201T B20 A30	2CSR255188R1205		0.2	1
		25	588719	DS201T B25 A30	2CSR255188R1255		0.2	1
		32	576914	DS201T B32 A30	2CSR255188R1325		0.2	1
		40	565116	DS201T B40 A30	2CSR255188R1405		0.2	1

RCBOs

DS201 UL technical features

				DS201 UL
	Standards			UL 1053, UL 1077,IEC 61009-1, IEC 61009-2-1
Electrical features	Type (wave form of the earth leakage sensed)			A
	Number of poles			1P + N
	Rated current In		A	6 ≤ In ≤ 40
	Rated sensitivity IΔn		A	0.03
	Rated operational voltage Ue		V	230-240
	Rated Insulation voltage Ui acc. to IEC/EN 60664-1		V	500 V AC
	Overvoltage category			III
	Pollution degree			2
	Operating voltage of circuit test Ut		V	110 – 277
	Rated frequency f		Hz	50/60
	Rated breaking capacity acc. to To UL 1053, IEC 61009-1, IEC 61009-2-1	Icn	A	6 000
	Rated breaking capacity acc. to IEC 60947-2	ultimate Icu	kA	10
		service Ics	kA	7.5
	Grid distance		mm	35
	Rated residual breaking capacity IΔm according to IEC 61009-1	IΔm	A	6 000
	Rated impulse withstand voltage Uimp. (1.2/50µs)		kV	4 kV
	Dielectric test voltage at ind. freq. for 1 min.		kV	2 kV (50 / 60Hz, 1 min.)
	Tripping characteristic	B: 3 In ≤ In ≤ 5 In		■
		C: 5 In ≤ In ≤ 10 In		■
		K: 10 In < = In >= 14 In		■
	Rated residual breaking capacity IΔm		A	6 000
	Surge current resistance (wave 8/20 µs)			NA
Mechanical features	Housing Type			Insulation group I - II, RAL 7035
	Toggle Type			Insulation group II, Black RAL 9005, sealable in ON-OFF positions
	Contact position indication			Green/Red Window
	Earth fault trip indication			Blue flag on toggle
	Electrical Endurance	cycles (OFF-ON-OFF)		10000
	Mechanical Endurance	cycles (OFF-ON-OFF)		20000
	Protection degree acc. to EN 60529	housing		IP40
		terminals		IP20
	Resistance to Shock acc. to IEC 60068-2-27			25g - 2 shocks - 13ms
	Resistance to Vibrations acc. to IEC 60068-2-6			0.1 mm or 1 g - 20 cycles at 5…150…5 Hz
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C / RH	28 cycles with 55°C/90-96% and 25°C/95-100%
	Reference temperature for setting of thermal element		°C / °F	30 / 86
	Ambient temperature (with daily average ≤ +35 °C)		°C / °F	-25…+55 / -13…+131
	Storage temperature		°C / °F	-40…+70 / -40…+158
Installation	Terminal type	top / bottom		Failsafe bi-directional cylinder-lift terminal (shock protected)
	Cross-section of conductors (IEC) solid cables	top / bottom	mm^2	25 / 10
	Cross-section of conductors (UL/CSA) solid cables		AWG	25 / 10
	Cross-section of conductors (IEC) stranded cables	top / bottom	mm^2	16 / 6
	Cross-section of conductors (UL/CSA) solid cables		AWG	16 / 6
	These terminals are not suitable for copper compact stranded conductors			
	Cross-section of busbars (IEC)	top / bottom	mm^2	10
	Cross-section of busbars (UL/CSA)		AWG	8
	Tightening torque	top / bottom	Nm	2.8
	Wire Stripping Length		mm	12
	Screwdriver			No. 2 Pozidrive
	Mounting Type			on DIN rail EN 60715 (35mm) by means of mounting clip
	Mounting position			Any
	Supply from			Top/Bottom terminals
Dimensions and weight	Dimensions (H x D x W)		mm / in	85 x 69 x 35 / 3.34 x 2.71 x 1.37
	Weight		g / lb	200 / 0.44
Combination with auxiliary elements	Combinable with accessories and auxiliaries	Auxiliary contact		yes
		Signal contact / auxiliary contact		yes
		Shunt trip		yes
		Auxiliary contact for bottom fitting		yes
		Undervoltage release		yes
		Overvoltage release		yes
		Motor operating device		yes

N.B The combination is mechanically compatible with but no UL approved.

RCBOs

DS201 UL 6000 A type, B characteristic

DS201 UL

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

This particular series of devices is UL & CSA approved and is a supplementary protector.

Application: residential, commercial, industrial.
Standard: UL 1053 & 1077, CSA C22.2 N0. 144, CSA C22.2 N0. 235

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	577614	DS201 B6 A30 UL	2CSR255187R1065		0.2	1
		10	565819	DS201 B10 A30 UL	2CSR255187R1105		0.2	1
		13	590712	DS201 B13 A30 UL	2CSR255187R1135		0.2	1
		16	578918	DS201 B16 A30 UL	2CSR255187R1165		0.2	1
		20	567170	DS201 B20 A30 UL	2CSR255187R1205		0.2	1
		30	576617	DS201 B30 A30 UL	2CSR255187R1305		0.2	1
		32	564812	DS201 B32 A30 UL	2CSR255187R1325		0.2	1
		35	588313	DS201 B35 A30 UL	2CSR255187R1355		0.2	1
		40	576518	DS201 B40 A30 UL	2CSR255187R1405		0.2	1

DS201 UL

DS201 UL 6000 A type, C characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

This particular series of devices is UL & CSA approved and is a supplementary protector.

Application: residential, commercial, industrial.
Standard: UL 1053 & 1077, CSA C22.2 N0. 144, CSA C22.2 N0. 235

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	588511	DS201 C6 A30 UL	2CSR255187R1064		0.2	1
		10	576716	DS201 C10 A30 UL	2CSR255187R1104		0.2	1
		13	564911	DS201 C13 A30 UL	2CSR255187R1134		0.2	1
		16	589518	DS201 C16 A30 UL	2CSR255187R1164		0.2	1
		20	577713	DS201 C20 A30 UL	2CSR255187R1204		0.2	1
		30	590811	DS201 C30 A30 UL	2CSR255187R1304		0.2	1
		32	579014	DS201 C32 A30 UL	2CSR255187R1324		0.2	1
		35	567219	DS201 C35 A30 UL	2CSR255187R1354		0.2	1
		40	589419	DS201 C40 A30 UL	2CSR255187R1404		0.2	1

RCBOs

DS201 UL 6000 A type, K characteristic

DS201 UL

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

This particular series of devices is UL & CSA approved and is a supplementary protector.

Application: residential, commercial, industrial.
Standard: UL 1053 & 1077, CSA C22.2 N0. 144, CSA C22.2 N0. 235

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	10	564713	DS201 K10 A30 UL	2CSR255187R1107		0.2	1
		13	589310	DS201 K13 A30 UL	2CSR255187R1137		0.2	1
		16	577515	DS201 K16 A30 UL	2CSR255187R1167		0.2	1
		20	565710	DS201 k20 A30 UL	2CSR255187R1207		0.2	1

RCBO DS301C

Slim, Space-Saving, Voltage Independent RCBOs for Next-Level Safety!

Easy to install
Bi-directional cylindrical terminals improve the level of safety and ease of connecting operations.

Reliable DIN-Rail clip
The top and bottom clips ensure a secure grip on the rail and a stable vertical position.

Clear terminal identification
To prevent misuses.

Test button
To verify the correct RCD functioning.

Laser printed information
The device information is laser printed to ensure readability over time.

Contact position indicator (CPI)
The toggle has a clear color that indicates the level position ON/OFF.

Dedicated space for label
Clearly identify the protected circuits.

Earth fault indicator (DTI)
A dedicated window that changes from grey to blue to indicate if the trip is caused by an earth fault.

Compactness
This voltage independent RCBO fits in one module width (17.8 mm²) only to guarantee it usage in retrofit enhancement and saving space in new consumer units.

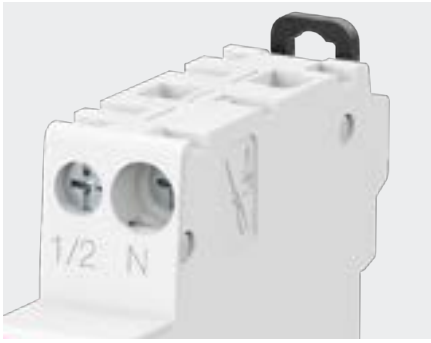

Easy installation
The failsafe terminals available on DS301C make easier the supply operation in parallel with cables up to 16 mm² and busbars 10 mm² and make sure the cable is cor-rectly fixed in the terminal.
Supply is possible either from top or bottom side.

Display the operational status
Easy troubleshooting and reduced downtime for maintenance operations thanks to the blue indicator, that signals the differential tripping to immediately identify any earth fault and the contact position indicator on toggle (CPI) that helps to always know the status of the contacts (red: closed contacts, green: open contacts).

Product identification
To easier the access to all DS301C product information (performance, certificates, troubleshooting…) a laser printed QR code is on the front face to reach the product webpage also when the product is already installed on the Din rail.

Additional laser printing
Additional information are laser printed on the lateral side of the device, including also the wiring diagram and the EAN code respectively for an easier installation and for an easier stock management.

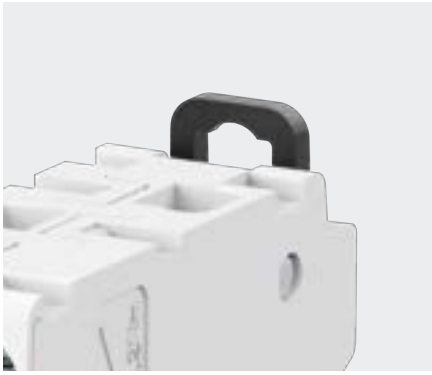

Mounting clip
Stable fixing on DIN rail, easy and fast mounting and dismounting operations thanks to the standard mounting clip.

RCBO DS301C

Slim solutions for complete protection

				DS301C	DS301CT
Electrical features	Standards			IEC/EN 61009-2-1 DIN EN 62423 (only for F Type)	IEC/EN 61009-2-1 DIN EN 62423 (only for F Type)
	Type (wave form of the earth leakage sensed)			A-AC, F, G	A
	Number of poles			1P + N (1 pole protected)	1P + N (1 pole protected)
	Rated current In		A	6 ≤ In ≤ 20	6 ≤ In ≤ 20
	Rated sensitivity IΔn		A	0.03, 0.1, 0.3	0.03
	Rated operational voltage Ue		V	230-240	230-240
	Rated Sensitivity		mA	30, 100, 300	30
	Rated Insulation voltage Ui acc. to IEC/EN 60664-1		V	500 V AC	500 V AC
	Overvoltage category			III	III
	Pollution degree			2	2
	Operating voltage of circuit test Ut		V	170 – 264 (AC)	170 – 264 (AC)
	Rated frequency f		Hz	50	50
	Frequency range of residual current		Hz	1 - 1.000 Hz (F & Type)	-
	Rated frequency		Hz	50	50
	Rated short circuit breaking capacity acc. to IEC/EN 61009-1	Icn	A	6000	6000
	Rated breaking capacity	ultimate Icu	kA	6	6
	acc. To IEC/EN 60947-2 (only referring to short circuit test)	service Ics	kA	6	6
	Grid distance		mm	35	35
	Rated residual breaking capacity IDM IDM according to EN 61009-1		A	6000 A (4500 A for In 20 A)	6000 A (4500 A for In 20 A)
	Rated residual breaking capacity IDM IDM according to IEC 61009-1		A	4500 A (3000 A for In 20 A)	4500 A (3000 A for In 20 A)
	Rated impulse withstand voltage Uimp. (1.2/50µs)		KV	4	4
	Dielectric test voltage at ind. Freq. For 1 min.			2.5 (50 Hz, 1 min).	2.5 (50 Hz, 1 min).
	Thermomagnetic release—	B: 3 In ≤ In ≤ 5 In		■	■
	Characteristic	C: 5 In ≤ In ≤ 10 In		■	■
	Energy limiting class acc. To EN 61009-1			3	3
	Surge current resistance (wave 8/20µs)		NA	3000A (for F & G types)	-
	Powerloss (average per pole)		W	1.42	1.42
Mechanical features	Housing Type			Insulation group 1-II, RAL 7035	Insulation group 1-II, RAL 7035
	Toggle Type			Insulation group II, Black RAL 9005, sealable in ON-OFF positions	Insulation group II, Black RAL 9005, sealable in ON-OFF positions
	Contact position indication			On toggle	On toggle
	Earth fault trip indication			Blue flag window	Blue flag window
	Electrical Endurance	cycles (OFF-ON-OFF)		7000	7000
	Mechanical Endurance	cycles (OFF-ON-OFF)		7000	7000
	Protection degree acc. To EN 60529	housing		IP40	IP40
		terminals		IP20	IP20
	Resistance to Shock acc. to IEC 60068-2-27			25g—2 shocks—13 ms	25g—2 shocks—13ms
	Resistance to Vibrations acc. to IEC 60068-2-6			0.1 mm or 1 g—20 cycles at 5...150...5 Hz	0.1 mm or 1 g—20 cycles at 5...150...5 Hz Category 1, Class B according to IEC 61373
	Environmental conditions (damp heat) acc. IEC/EN 60068-2-30		°C/RH	28 cycles with 55°C/90-96% and 25°C/95-100%	28 cycles with 55°C/90-96% and 25°C/95-100%
	Reference temperature for tripping characteristics		°C	30	30
	Ambient temperature (with daily average ≤ +35°C)		°C	-25...+55	-25...+55
	Storage temperature		°C	-40...+70	-40...+70

RCBO DS301C

Slim solutions for complete protection

				DS301C	DS301CT
Installation	Terminal type	top / bottom		Faisafe	Faisafe
	Cross-section of conductors (IEC)	top / bottom	mm^2	16/16	16/16
	Cross-section of busbars (IEC)	top / bottom	mm^2	10/10	10/10
	Tightening torque	top / bottom	Nm	1.2	1.2
	Wire Stripping Length		mm	10	10
	Screwdriver			No. 2 Pozidrive	No. 2 Pozidrive
	Mounting Type			on DIN rail EN 60715 (35 mm) by means of mounting clip	on DIN rail EN 60715 (35 mm) by means of mounting clip
	Mounting position			Any	Any
	Supply from			Top/Bottom terminals	Top/Bottom terminals
Dimension and weight	Dimensions (H x D x W)		mm	92 x 68 x 17.6	92 x 68 x 17.6
	Weight		g	110	110

RCBO DS301C

DS301C 6000 A type, B characteristic

DS301C B16 A30

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional pro-tection against direct contact (IΔn = 30 mA).

Application: Residential, Commercial, Building, Industrial.
Standard: IEC 61009-1; IEC 61009-2-1
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	359357	DS301C B6 A30	2CSR255163R1065		0.1	1
1P+N	30	10	359456	DS301C B10 A30	2CSR255163R1105		0.1	1
1P+N	30	10	359555	DS301C B10 A30	2CSR255163U1105		0.1	96
1P+N	30	13	359654	DS301C B13 A30	2CSR255163R1135		0.1	1
1P+N	30	13	359753	DS301C B13 A30	2CSR255163U1135		0.1	96
1P+N	30	16	359852	DS301C B16 A30	2CSR255163R1165		0.1	1
1P+N	30	16	359951	DS301C B16 A30	2CSR255163U1165		0.1	96
1P+N	30	20	360056	DS301C B20 A30	2CSR255163R1205		0.1	1
1P+N	100	10	790259	DS301C B10 A100	2CSR255163R2105		0.1	1
1P+N	300	10	790853	DS301C B10 A300	2CSR255163R3105		0.1	1
1P+N	100	16	790358	DS301C B16 A100	2CSR255163R2165		0.1	1
1P+N	300	16	790952	DS301C B16 A300	2CSR255163R3165		0.1	1
1P+N	100	20	790457	DS301C B20 A100	2CSR255163R2205		0.1	1
1P+N	300	20	791058	DS301C B20 A300	2CSR255163R3205		0.1	1

DS301C 6000 A type, C characteristic

DS301C C16 A30

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional pro-tection against direct contact (IΔn = 30 mA).

Application: Residential, Commercial, Building, Industrial.
Standard: IEC 61009-1; IEC 61009-2-1
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	360957	DS301C C6 A30	2CSR255163R1064		0.1	1
1P+N	30	10	361053	DS301C C10 A30	2CSR255163R1104		0.1	1
1P+N	30	10	361152	DS301C C10 A30	2CSR255163U1104		0.1	96
1P+N	30	13	361251	DS301C C13 A30	2CSR255163R1134		0.1	1
1P+N	30	13	361350	DS301C C13 A30	2CSR255163U1134		0.1	96
1P+N	30	16	361459	DS301C C16 A30	2CSR255163R1164		0.1	1
1P+N	30	16	361558	DS301C C16 A30	2CSR255163U1164		0.1	96
1P+N	30	20	361657	DS301C C20 A30	2CSR255163R1204		0.1	1
1P+N	100	10	790556	DS301C C10 A100	2CSR255163R2104		0.1	1
1P+N	300	10	791157	DS301C C10 A300	2CSR255163R3104		0.1	1
1P+N	100	16	790655	DS301C C16 A100	2CSR255163R2164		0.1	1
1P+N	300	16	791256	DS301C C16 A300	2CSR255163R3164		0.1	1
1P+N	100	20	790754	DS301C C20 A100	2CSR255163R2204		0.1	1
1P+N	300	20	791355	DS301C C20 A300	2CSR255163R3204		0.1	1

RCBO DS301C

DS301C 6000 AC type, B characteristic

DS301C B16 AC30

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional pro-tection against direct contact (IΔn = 30 mA).

Application: Residential, Commercial, Building, Industrial.
Standard: IEC 61009-1; IEC 61009-2-1
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	360155	DS301C B6 AC30	2CSR255063R1065		0.1	1
1P+N	30	10	360254	DS301C B10 AC30	2CSR255063R1105		0.1	1
1P+N	30	10	360353	DS301C B10 AC30	2CSR255063U1105		0.1	96
1P+N	30	13	360452	DS301C B13 AC30	2CSR255063R1135		0.1	1
1P+N	30	13	360551	DS301C B13 AC30	2CSR255063U1135		0.1	96
1P+N	30	16	360650	DS301C B16 AC30	2CSR255063R1165		0.1	1
1P+N	30	16	360759	DS301C B16 AC30	2CSR255063U1165		0.1	96
1P+N	30	20	360858	DS301C B20 AC30	2CSR255063R1205		0.1	1

DS301C 6000 AC type, C characteristic

DS301C C16 AC30

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional pro-tection against direct contact (IΔn = 30 mA).

Application: Residential, Commercial, Building, Industrial.
Standard: IEC 61009-1; IEC 61009-2-1
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	361756	DS301C C6 AC30	2CSR255063R1064		0.1	1
1P+N	30	10	361855	DS301C C10 AC30	2CSR255063R1104		0.1	1
1P+N	30	10	361954	DS301C C10 AC30	2CSR255063U1104		0.1	96
1P+N	30	13	362050	DS301C C13 AC30	2CSR255063R1134		0.1	1
1P+N	30	13	362159	DS301C C13 AC30	2CSR255063U1134		0.1	96
1P+N	30	16	362258	DS301C C16 AC30	2CSR255063R1164		0.1	1
1P+N	30	16	362357	DS301C C16 AC30	2CSR255063U1164		0.1	96
1P+N	30	20	362456	DS301C C20 AC30	2CSR255063R1204		0.1	1

RCBO DS301C

DS301C 6000 F type, B characteristic

DS301C B16 F30

Function: protection of end user single-phase circuits against overload and shortcircuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: Residential, Commercial, Building, Industrial.
Standard: IEC 61009-1; IEC 61009-2-1
DIN EN 62423 (only for F Type)
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1+N	30	6	8012542722953	DS301C B6 F30	2CSR255563R1065		0.11	1
1+N	30	10	8012542723059	DS301C B10 F30	2CSR255563R1105		0.11	1
1+N	30	13	8012542723158	DS301C B13 F30	2CSR255563R1135		0.11	1
1+N	30	16	8012542723257	DS301C B16 F30	2CSR255563R1165		0.11	1
1+N	30	20	8012542723356	DS301C B20 F30	2CSR255563R1205		0.11	1

RCBO DS301C

DS301C 6000 F type, C characteristic

DS301C C16 F30

Function: protection of end user single-phase circuits against overload and shortcircuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: Residential, Commercial, Building, Industrial.
Standard: IEC 61009-1; IEC 61009-2-1
DIN EN 62423 (only for F Type)
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1+N	30	6	8012542723455	DS301C C6 F30	2CSR255563R1064		0.11	1
1+N	30	10	8012542723554	DS301C C10 F30	2CSR255563R1104		0.11	1
1+N	30	13	8012542723653	DS301C C13 F30	2CSR255563R1134		0.11	1
1+N	30	16	8012542723752	DS301C C16 F30	2CSR255563R1164		0.11	1
1+N	30	20	8012542723851	DS301C C20 F30	2CSR255563R1204		0.11	1

RCBO DS301C

DS301C 6000 G type, B characteristic

DS301C B16 G30

Function: protection of end user single-phase circuits against overload and shortcircuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: Residential, Commercial, Building, Industrial.
Standard: IEC 61009-1; IEC 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1+N	30	6	8012542723950	DS301C B6 G30	2CSR255463R1065		0.11	1
1+N	30	10	8012542724056	DS301C B10 G30	2CSR255463R1105		0.11	1
1+N	30	13	8012542724155	DS301C B13 G30	2CSR255463R1135		0.11	1
1+N	30	16	8012542724254	DS301C B16 G30	2CSR255463R1165		0.11	1
1+N	30	20	8012542724353	DS301C B20 G30	2CSR255463R1205		0.11	1

RCBO DS301C

DS301C 6000 G type, C characteristic

DS301C C16 G30

Function: protection of end user single-phase circuits against overload and shortcircuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: Residential, Commercial, Building, Industrial.
Standard: IEC 61009-1; IEC 61009-2-1
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1+N	30	6	8012542724452	DS301C C6 G30	2CSR255463R1064		0.11	1
1+N	30	10	8012542724551	DS301C C10 G30	2CSR255463R1104		0.11	1
1+N	30	13	8012542724650	DS301C C13 G30	2CSR255463R1134		0.11	1
1+N	30	16	8012542724759	DS301C C16 G30	2CSR255463R1164		0.11	1
1+N	30	20	8012542724858	DS301C C20 G30	2CSR255463R1204		0.11	1

RCBO DS301C

DS301C T 6000 A type, B characteristic

DS301CT B16 A30

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional pro-tection against direct contact (IΔn = 30 mA). This series is dedicated to traction and meet the hazard level R22,R23 and R26/HL3.

Application: Traction.
Standard: IEC 61009-1; IEC 61009-2-1; EN45545-2:2013+A1:2015
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	362555	DS301CT B6 A30	2CSR255164R1065		0.1	1
1P+N	30	10	362654	DS301CT B10 A30	2CSR255164R1105		0.1	1
1P+N	30	13	362753	DS301CT B13 A30	2CSR255164R1135		0.1	1
1P+N	30	16	362852	DS301CT B16 A30	2CSR255164R1165		0.1	1
1P+N	30	20	362951	DS301CT B20 A30	2CSR255164R1205		0.1	1

DS301C T 6000 A type, C characteristic

DS301CT C16 A30

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional pro-tection against direct contact (IΔn = 30 mA). This series is dedicated to traction and meet the hazard level R22,R23 and R26/HL3.

Application: Traction.
Standard: IEC 61009-1; IEC 61009-2-1; EN45545-2:2013+A1:2015
Icn = 6000 A

No. of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	30	6	363057	DS301CT C6 A30	2CSR255164R1064		0.1	1
1P+N	30	10	363156	DS301CT C10 A30	2CSR255164R1104		0.1	1
1P+N	30	13	363255	DS301CT C13 A30	2CSR255164R1134		0.1	1
1P+N	30	16	363354	DS301CT C16 A30	2CSR255164R1164		0.1	1
1P+N	30	20	363453	DS301CT C20 A30	2CSR255164R1204		0.1	1

DS202CR

The details make the difference.
A new range designed to ensure efficiency and protection.

Test pushbutton
Test pushbutton to verify the correct functioning of the device.

Earth fault indicator (DTI)
Blue flag on the window to identify earth fault trips.

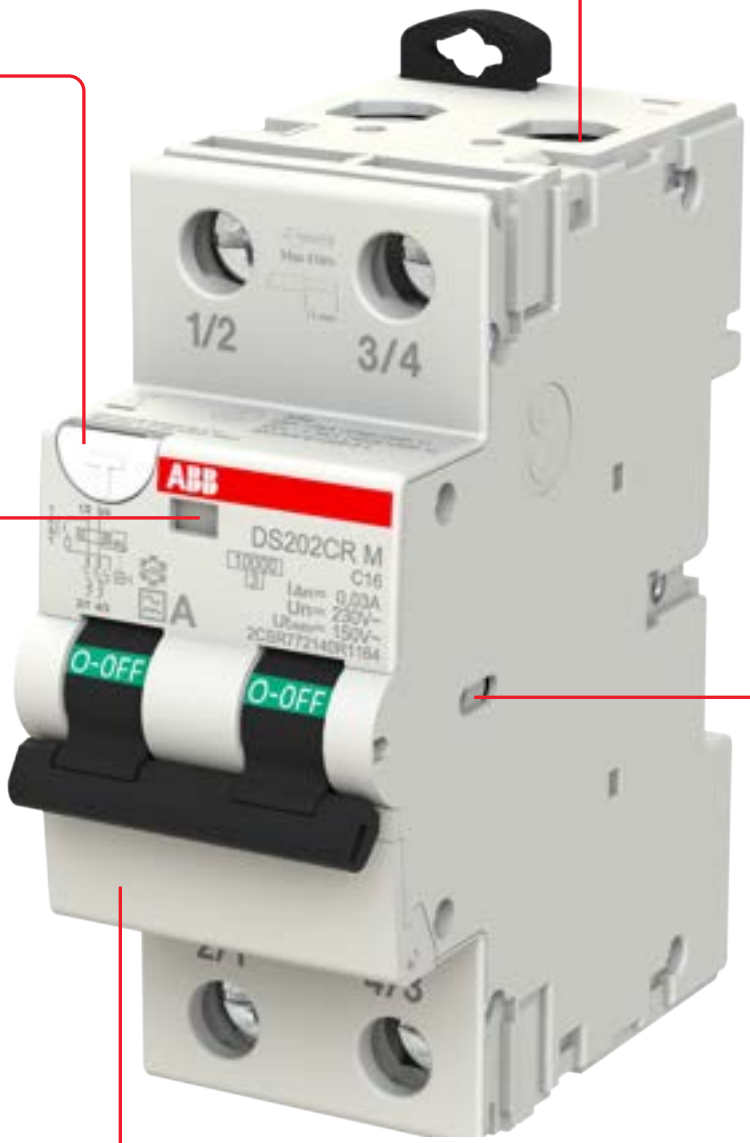

Easy to install
Terminals equipped with fail safe feature to avoid improper installation.
For connection with cables (Rigid: 35mm², Flex: 25mm²) and pin PS busbars
Dedicated busbar terminals for fork type busbars Supply possible either from top or bottom side.

Combination with accessories
Common accessories with the S200C compact MCB range allowing signaling and auxiliary contact.

Dedicated space for label
Dedicated space to stick labels in order to clearly identify the protected lines.

RCBOs

DS202CR technical features

				DS202CR	DS202CR M	DS202CR M 110V
	Standards			IEC/EN 61009-1; IEC/EN 61009-2-1		IEC 61009-1; IEC 61009-2-1
Electrical features	Type (wave form of the earth leakage sensed)			A	A, APR	A
	Number of poles			2P	2P	2P
	Rated current In		A	6 ≤ In ≤ 40	6 ≤ In ≤ 40	6 ≤ In ≤ 40
	Rated sensitivity IΔn		A	0.03-0.3	0.01-0.03-0.3	0.03
	Rated operational voltage Ue		V	230	230	110
	Rated Insulation voltage Ui acc. to IEC/EN 60664-1		V	440	440	440
	Overvoltage category			III	III	III
	Pollution degree			3	3	3
	Operating voltage of circuit test Ut		V	117 (150 for 30 mA) - 254	117 (150 for 30 mA) - 254	93-135
	Rated frequency f		Hz	50	50	50/60
	Rated short circuit breaking capacity acc. to IEC/EN 61009-1	Icn	A	6000	10000	10000
	Rated short circuit breking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate Icu	kA	10	10	10
		service Ics	kA	6	7.5	7.5
	Grid distance		mm	35 (for In<40), 60 (for In=40)	35 (for In<40), 60 (for In=40)	35 (for In<40), 60 (for In=40)
	Rated residual breaking capacity IΔm according to EN 61009-1	IΔm	kA	3	3	3
	Rated impulse withstand voltage Uimp. (1.2/50µs)	IΔm	kV	4	4	4
	Dielectric test voltage at ind. freq. for 1 min.		kV	2.5	2.5	2.5
	Tripping characteristic	B: 3 In ≤ In ≤ 5 In		■	■	
		C: 5 In ≤ In ≤ 10In		■	■	■
	Energy limiting class acc. to EN 61009-1			3	3	3
	Surge current resistance (wave 8/20)		A	250 for A version; 3000 for APR version		
Mechanical features	Toggle Type			black sealable in ON-OFF position		
	Contact position indication (CPI)			CPI on toggle (green/red)		
	Earth fault trip indication			on window (blue)		
	Electrical Endurance		cycles (OFF-ON-OFF)	10000	10000	10000
	Mechanical Endurance		cycles (OFF-ON-OFF)	15000	15000	15000
	Protection degree acc. to EN 60529	housing		IP40	IP40	IP40
		terminals		IP20	IP20	IP20
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55°C/90-96% and 25°C/95-100%		
	Reference temperature for tripping characteristics		°C	30	30	30
	Ambient temperature (with daily average ≤ +35 °C)		°C	-25...+55	-25...+55	-25...+55
	Storage temperature		°C	-40...+70	-40...+70	-40...+70
Installation	Terminal type	top / bottom		failsafe cage terminal		
	Cross-section of conductors	top / bottom	mm^2	25/25 flexible; 35/35 rigid	25/25 flexible; 35/35 rigid	25/25 flexible; 35/35 rigid
	Cross-section of busbars	top / bottom	mm^2	10/10	10/10	10/10
	Tightening torque		Nm	4 (max.)	4 (max.)	4 (max.)
	Wire Stripping Length		mm	11	11	11
	Screwdriver			Nr. 2 Pozidriv	Nr. 2 Pozidriv	Nr. 2 Pozidriv
	Mounting type			on DIN rail EN 60715 (35mm) by means of mounting clip		
	Mounting position			Any	Any	Any
	Supply from			Top/Bottom terminals	Top/Bottom terminals	Top/Bottom terminals
Dimensions and weight	Dimensions (H x D x W)		mm	86 x 72 x 36	86 x 72 x 36	86 x 72 x 36
	Weight		g	220	220	220
Combination with auxiliary elements		Auxiliary contact		yes	yes	yes
		Auxiliary/Signal contact		yes	yes	yes

RCBOs

DS202CR series 6000 A type, B characteristic

DS202CR

DS202CR A type, B characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 402290 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	6	3033660	DS202CR B6 A30	2CSR752140R1065		0,245	1
		10	3033684	DS202CR B10 A30	2CSR752140R1105		0,245	1
		13	3033707	DS202CR B13 A30	2CSR752140R1135		0,245	1
		16	3033721	DS202CR B16 A30	2CSR752140R1165		0,245	1
		20	3033745	DS202CR B20 A30	2CSR752140R1205		0,245	1
		25	3033769	DS202CR B25 A30	2CSR752140R1255		0,245	1
		32	3033783	DS202CR B32 A30	2CSR752140R1325		0,245	1
		40	3033806	DS202CR B40 A30	2CSR752140R1405		0,245	1
	300	6	3033820	DS202CR B6 A300	2CSR752140R3065		0,245	1
		10	3033844	DS202CR B10 A300	2CSR752140R3105		0,245	1
		13	3033868	DS202CR B13 A300	2CSR752140R3135		0,245	1
		16	3033882	DS202CR B16 A300	2CSR752140R3165		0,245	1
		20	3033905	DS202CR B20 A300	2CSR752140R3205		0,245	1
		25	3033929	DS202CR B25 A300	2CSR752140R3255		0,245	1
		32	3033943	DS202CR B32 A300	2CSR752140R3325		0,245	1
		40	3033967	DS202CR B40 A300	2CSR752140R3405		0,245	1

RCBOs

DS202CR series 6000 A type, C characteristic

DS202CR

DS202CR A type, C characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 402290 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	6	3033653	DS202CR C6 A30	2CSR752140R1064		0,245	1
		10	3033677	DS202CR C10 A30	2CSR752140R1104		0,245	1
		13	3033691	DS202CR C13 A30	2CSR752140R1134		0,245	1
		16	3033714	DS202CR C16 A30	2CSR752140R1164		0,245	1
		20	3033738	DS202CR C20 A30	2CSR752140R1204		0,245	1
		25	3033752	DS202CR C25 A30	2CSR752140R1254		0,245	1
		32	3033776	DS202CR C32 A30	2CSR752140R1324		0,245	1
		40	3033790	DS202CR C40 A30	2CSR752140R1404		0,245	1
	300	6	3033813	DS202CR C6 A300	2CSR752140R3064		0,245	1
		10	3033837	DS202CR C10 A300	2CSR752140R3104		0,245	1
		13	3033851	DS202CR C13 A300	2CSR752140R3134		0,245	1
		16	3033875	DS202CR C16 A300	2CSR752140R3164		0,245	1
		20	3033899	DS202CR C20 A300	2CSR752140R3204		0,245	1
		25	3033912	DS202CR C25 A300	2CSR752140R3254		0,245	1
		32	3033936	DS202CR C32 A300	2CSR752140R3324		0,245	1
		40	3033950	DS202CR C40 A300	2CSR752140R3404		0,245	1

RCBOs

DS202CR M series 10000 A type, B characteristic

DS202CR M

DS202CR M A type, B characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 402290 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	10	10	3034292	DS202CR M B10 A10	2CSR772140R0105		0,245	1
		13	3034315	DS202CR M B13 A10	2CSR772140R0135		0,245	1
		16	3034339	DS202CR M B16 A10	2CSR772140R0165		0,245	1
	30	6	3034377	DS202CR M B6 A30	2CSR772140R1065		0,245	1
		10	3034414	DS202CR M B10 A30	2CSR772140R1105		0,245	1
		13	3034452	DS202CR M B13 A30	2CSR772140R1135		0,245	1
		16	3034490	DS202CR M B16 A30	2CSR772140R1165		0,245	1
		20	3034537	DS202CR M B20 A30	2CSR772140R1205		0,245	1
		25	3034575	DS202CR M B25 A30	2CSR772140R1255		0,245	1
		32	3034612	DS202CR M B32 A30	2CSR772140R1325		0,245	1
		40	3034636	DS202CR M B40 A30	2CSR772140R1405		0,245	1
	300	6	3034650	DS202CR M B6 A300	2CSR772140R3065		0,245	1
		10	3034674	DS202CR M B10 A300	2CSR772140R3105		0,245	1
		13	3034698	DS202CR M B13 A300	2CSR772140R3135		0,245	1
		16	3034711	DS202CR M B16 A300	2CSR772140R3165		0,245	1
		20	3034735	DS202CR M B20 A300	2CSR772140R3205		0,245	1
		25	3034759	DS202CR M B25 A300	2CSR772140R3255		0,245	1
		32	3034773	DS202CR M B32 A300	2CSR772140R3325		0,245	1
		40	3034797	DS202CR M B40 A300	2CSR772140R3405		0,245	1

RCBOs

DS202CR M series 10000 A type, C characteristic

DS202CR M

DS202CR M A type, C characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 402290 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	10	13	3034308	DS202CR M C13 A10	2CSR772140R0134		0,245	1
		16	3034322	DS202CR M C16 A10	2CSR772140R0164		0,245	1
	30	6	3034360	DS202CR M C6 A30	2CSR772140R1064		0,245	1
		10	3034407	DS202CR M C10 A30	2CSR772140R1104		0,245	1
		13	3034445	DS202CR M C13 A30	2CSR772140R1134		0,245	1
		16	3034483	DS202CR M C16 A30	2CSR772140R1164		0,245	1
		20	3034520	DS202CR M C20 A30	2CSR772140R1204		0,245	1
		25	3034568	DS202CR M C25 A30	2CSR772140R1254		0,245	1
		32	3034605	DS202CR M C32 A30	2CSR772140R1324		0,245	1
		40	3034629	DS202CR M C40 A30	2CSR772140R1404		0,245	1
	300	6	3034643	DS202CR M C6 A300	2CSR772140R3064		0,245	1
		10	3034667	DS202CR M C10 A300	2CSR772140R3104		0,245	1
		13	3034681	DS202CR M C13 A300	2CSR772140R3134		0,245	1
		16	3034704	DS202CR M C16 A300	2CSR772140R3164		0,245	1
		20	3034728	DS202CR M C20 A300	2CSR772140R3204		0,245	1
		25	3034742	DS202CR M C25 A300	2CSR772140R3254		0,245	1
		32	3034766	DS202CR M C32 A300	2CSR772140R3324		0,245	1
		40	3034780	DS202CR M C40 A300	2CSR772140R3404		0,245	1

RCBOs

DS202CR M series 10000 A APR type, B characteristic

DS202CR M APR

DS202CR M APR type, B characteristic
Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal compromise between safety and continuity of service, thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 402290 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	6	3035206	DS202CR M B6 APR30	2CSR772440R1065		0,245	1
		10	3035220	DS202CR M B10 APR30	2CSR772440R1105		0,245	1
		13	3035244	DS202CR M B13 APR30	2CSR772440R1135		0,245	1
		16	3035268	DS202CR M B16 APR30	2CSR772440R1165		0,245	1
		20	3035282	DS202CR M B20 APR30	2CSR772440R1205		0,245	1
		25	3035305	DS202CR M B25 APR30	2CSR772440R1255		0,245	1
		32	3035329	DS202CR M B32 APR30	2CSR772440R1325		0,245	1
		40	3035343	DS202CR M B40 APR30	2CSR772440R1405		0,245	1
	300	6	3035350	DS202CR M B6 APR300	2CSR772440R3065		0,245	1
		10	3035367	DS202CR M B10 APR300	2CSR772440R3105		0,245	1
		13	3035374	DS202CR M B13 APR300	2CSR772440R3135		0,245	1
		16	3035381	DS202CR M B16 APR300	2CSR772440R3165		0,245	1
		20	3035398	DS202CR M B20 APR300	2CSR772440R3205		0,245	1
		25	3035404	DS202CR M B25 APR300	2CSR772440R3255		0,245	1
		32	3035411	DS202CR M B32 APR300	2CSR772440R3325		0,245	1
		40	3035428	DS202CR M B40 APR300	2CSR772440R3405		0,245	1

RCBOs

DS202CR M series 10000 APR type, C characteristic

DS202CR M APR

DS202CR M APR type, C characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 402290 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	6	3035190	DS202CR M C6 APR30	2CSR772440R1064		0,245	1
		10	3035213	DS202CR M C10 APR30	2CSR772440R1104		0,245	1
		13	3035237	DS202CR M C13 APR30	2CSR772440R1134		0,245	1
		16	3035251	DS202CR M C16 APR30	2CSR772440R1164		0,245	1
		20	3035275	DS202CR M C20 APR30	2CSR772440R1204		0,245	1
		25	3035299	DS202CR M C25 APR30	2CSR772440R1254		0,245	1
		32	3035312	DS202CR M C32 APR30	2CSR772440R1324		0,245	1
		40	3035336	DS202CR M C40 APR30	2CSR772440R1404		0,245	1

RCBOs

DS202CR M 110V series 10000 A type, C characteristic

DS202CR M 110V

DS202CR M 110V A type, C characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).
This particular series of devices has the minimum operating voltage of test button of 93V and it is suitable for 110 V applications.

Application: marine.
Standard: IEC 61009-1; IEC 61009-2-1
Icn = 10 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 402290 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	6	3035060	DS202CR M C6 A30 110V	2CSR772199R1064		0,245	1
		10	3035077	DS202CR M C10 A30 110V	2CSR772199R1104		0,245	1
		13	3035084	DS202CR M C13 A30 110V	2CSR772199R1134		0,245	1
		15	3035091	DS202CR M C15 A30 110V	2CSR772199R1154		0,245	1
		16	3035107	DS202CR M C16 A30 110V	2CSR772199R1164		0,245	1
		20	3035114	DS202CR M C20 A30 110V	2CSR772199R1204		0,245	1
		25	3035121	DS202CR M C25 A30 110V	2CSR772199R1254		0,245	1
		32	3035138	DS202CR M C32 A30 110V	2CSR772199R1324		0,245	1
		40	3035145	DS202CR M C40 A30 110V	2CSR772199R1404		0,245	1

RCBO DS203NC. The effective choice

The benefits of a product with the highest quality standards

Compact size for easy installation in small spaces and retrofitting of already existing facilities.

Terminals designed to ease the installation.

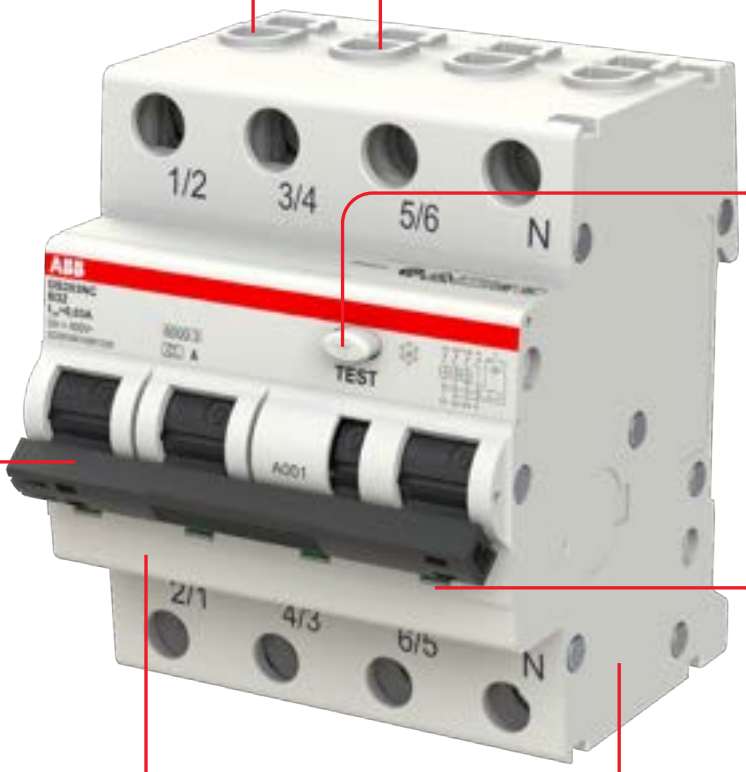

Test pushbutton to verify the correct functioning of the device.

Operating toggle can be sealed into on/off position to ensure maintenance in complete safety.

The indication of the status of the contacts is done with a mechanical connection to the mobile contacts and independently from the toggle position.
The contacts position indicator (CPI) allows to exactly know the status of the contacts of the device (green: open contacts, red: closed contacts).

Space for identification labels of the protected line.

Same profile as the System pro M compact® range.

Use with cables and with busbars
Terminals with two slots allow to use different types of conductors: one housing is designed for cables up to 25 mm², the other for busbars or cables up to 10 mm².

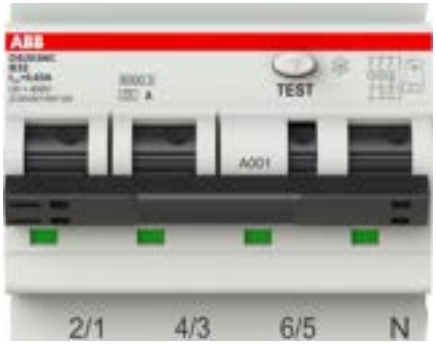

New toggle
The toggle is now squared, with a new and more ergonomic grip, to prevent slip during operations.

Differential trip indicator
In case of tripping due to earth fault, a blue flag appears on the toggle thus immediately showing the cause of the trip of the device. This feature helps in troubleshooting on the network and reduces the downtime for maintenance.

Laser print information
All the necessary technical and installation information is laser printed on the front and side of units ensuring visibility along the time, including order code on the front of the device for future orders.

Mounting clip
The mounting clip eases the installation and removal from the DIN rail, even when used in a battery of devices with busbars on bottom terminals (without the need to remove other devices).

Approval stamps
DS203NC residual current circuit breakers with overcurrent protection can meet different installation habits in various countries and are approved by the most important certification bodies like IMQ, VDE, KEMA.

RCBOs

DS203NC technical features

			DS203NC L	DS203NC
Standards			IEC/EN 61009-1; IEC/EN 61009-2-1	IEC/EN 61009-1; IEC/EN 61009-2-1
Electrical features				
Type (wave form of the earth leakage sensed)			AC, A, APR	AC, A, APR, S
Number of poles			3P+N	3P+N
Rated current In		A	6≤ In ≤ 32A	6≤ In ≤ 32A
Rated sensitivity IΔn		mA	30-300	30-100-300
Rated operational voltage Ue		V	400-415V	400-415V
Rated Insulation voltage Ui acc. to IEC/EN 60664-1		V	500 V AC	500 V AC
Overvoltage category			III	III
Pollution degree			2	2
Operating voltage of circuit test Ut		V	195 (300 for 30 mA) - 440	
Rated frequency f		Hz	50/60	50/60
Rated short circuit breaking capacity acc. to IEC/EN 61009-1	ultimate Icn	A	4500	6000
Rated short circuit breking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate Icu	kA	6	10
	service Ics	kA	4.5	6
Grid distance		mm	35	35
Rated residual breaking capacity IΔn acc. To EN 61009		kA	4.5	6
Rated residual breaking capacity IΔn acc. to IEC 61009		kA	4.5	4.5
Rated impulse withstand voltage Uimp. (1.2/50µs)		kV	4	4
Dielectric test voltage at ind. freq. for 1 min.		kV	2.5	2.5
Tripping characteristic	B: 3 In ≤ Im ≤ 5 In			■
	C: 5 In ≤ Im ≤ 10 In		■	■
	K: 10 In ≤ Im ≤ 14 In			■
Surge current resistance (wave 8/20)		A	NA for A, AC versions; 3000 for APR version	NA for A, AC versions; 3000 for APR version; 5000 for S version
Mechanical features				
Housing Type			Insulation group II, RAL 7035	Insulation group II, RAL 7035
Toggle Type			black, sealable in ON-OFF positions	black, sealable in ON-OFF positions
Contact position indication			CPI on window	CPI on window
Electrical Endurance		cycles (OFF-ON-OFF)	10000	10000
Mechanical Endurance		cycles (OFF-ON-OFF)	20000	20000
Protection degree	housing		IP40	IP40
	terminals		IP20	IP20
Resistance to Shock acc. to IEC 60068-2-27			30g - 2 shocks - 13ms	30g - 2 shocks - 13ms
Vibration resistance acc. to IEC/EN 60068-2-6			0,35mm or 5g - 20 cycles at 5…150…5 Hz without load	0,35mm or 5g - 20 cycles at 5…150…5 Hz without load
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55°C/90-96% and 25°C/95-100%	28 cycles with 55°C/90-96% and 25°C/95-100%
Reference temperature for tripping characteristics		°C	30	30
Ambient temperature (with daily average ≤ +35 °C)		°C	-25…+55	-25…+55
Storage temperature		°C	-40…+70	-40…+70

RCBOs

DS203NC technical features

			DS203NC L	DS203NC
Installation				
Terminal type	top/ bottom		failsafe bi-directional cylinder-lift terminal (shock protected)	failsafe bi-directional cylinder-lift terminal (shock protected)
Cross-section of conductors (IEC)	top/ bottom	mm^2	25/25	25/25
Cross-section of busbars (IEC)	top/ bottom	mm^2	10/10	10/10
Tightening torque	top/ bottom	Nm	2.8	2.8
Wire Stripping Length		mm	12	12
Screwdriver			No. 2 Pozidrive	No. 2 Pozidrive
Mounting Type			on DIN rail EN 60715 (35 mm) by means of mounting clip	on DIN rail EN 60715 (35 mm) by means of mounting clip
Supply from			Top/bottom terminals	Top/bottom terminals
Dimensions and weight				
Dimensions (H x D x W)		mm	85 x 69 x 70.4	85 x 69 x 70.4
Weight		g	480	480
Combination with auxiliary elements				
Combinable with accessories and auxiliaries, by means of interface contact SCC-IH6R	Auxiliary contact		yes	yes
	Signal contact		yes	yes
	Shunt trip		yes	yes
	Undervoltage release		yes	yes
	Overvoltage release		yes	yes

RCBOs

DS203NC L AC

DS203NC L - AC

DS203NC L - AC type - C curve
Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 4 500 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3P+N	30	6	353928	DS203NC L C6 AC30	2CSR246040R1064		0.480	1
		8	343622	DS203NC L C8 AC30	2CSR246040R1084		0.480	1
		10	353829	DS203NC L C10 AC30	2CSR246040R1104		0.480	1
		13	343523	DS203NC L C13 AC30	2CSR246040R1134		0.480	1
		16	353720	DS203NC L C16 AC30	2CSR246040R1164		0.480	1
		20	343424	DS203NC L C20 AC30	2CSR246040R1204		0.480	1
		25	353621	DS203NC L C25 AC30	2CSR246040R1254		0.480	1
		32	343325	DS203NC L C32 AC30	2CSR246040R1324		0.480	1
	300	6	343226	DS203NC L C6 AC300	2CSR246040R3064		0.480	1
		8	343127	DS203NC L C8 AC300	2CSR246040R3084		0.480	1
		10	343028	DS203NC L C10 AC300	2CSR246040R3104		0.480	1
		13	342922	DS203NC L C13 AC300	2CSR246040R3134		0.480	1
		16	776727	DS203NC L C16 AC300	2CSR246040R3164		0.480	1
		20	342823	DS203NC L C20 AC300	2CSR246040R3204		0.480	1
		25	342724	DS203NC L C25 AC300	2CSR246040R3254		0.480	1
		32	358428	DS203NC L C32 AC300	2CSR246040R3324		0.480	1

RCBOs

DS203NC L A type

DS203NC L - A

DS203NC L - A type - C curve
Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 4 500 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3P+N	30	6	354628	DS203NC L C6 A30	2CSR246140R1064		0.480	1
		8	344322	DS203NC L C8 A30	2CSR246140R1084		0.480	1
		10	354529	DS203NC L C10 A30	2CSR246140R1104		0.480	1
		13	344223	DS203NC L C13 A30	2CSR246140R1134		0.480	1
		16	354420	DS203NC L C16 A30	2CSR246140R1164		0.480	1
		20	344124	DS203NC L C20 A30	2CSR246140R1204		0.480	1
		25	354321	DS203NC L C25 A30	2CSR246140R1254		0.480	1
		32	498025	DS203NC L C32 A30	2CSR246140R1324		0.480	1
	300	6	499220	DS203NC L C6 A300	2CSR246140R3064		0.480	1
		8	344025	DS203NC L C8 A300	2CSR246140R3084		0.480	1
		10	354222	DS203NC L C10 A300	2CSR246140R3104		0.480	1
		13	343929	DS203NC L C13 A300	2CSR246140R3134		0.480	1
		16	354123	DS203NC L C16 A300	2CSR246140R3164		0.480	1
		20	343820	DS203NC L C20 A300	2CSR246140R3204		0.480	1
		25	354024	DS203NC L C25 A300	2CSR246140R3254		0.480	1
		32	343721	DS203NC L C32 A300	2CSR246140R3324		0.480	1

RCBOs

DS203NC L APR type

DS203NC L - APR

DS203NC L - APR type - C curve
Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal compromise between safety and continuity of service, thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA); protection and isolation of resistive and inductive loads.

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 4 500 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3P+N	30	6	079125	DS203NC L C6 APR30	2CSR246440R1064		0.480	1
		8	079026	DS203NC L C8 APR30	2CSR246440R1084		0.480	1
		10	078920	DS203NC L C10 APR30	2CSR246440R1104		0.480	1
		13	078821	DS203NC L C13 APR30	2CSR246440R1134		0.480	1
		16	078722	DS203NC L C16 APR30	2CSR246440R1164		0.480	1
		20	078623	DS203NC L C20 APR30	2CSR246440R1204		0.480	1
		25	078524	DS203NC L C25 APR30	2CSR246440R1254		0.480	1
		32	078425	DS203NC L C32 APR30	2CSR246440R1324		0.480	1

RCBOs

DS203NC AC type

DS203NC - AC

DS203NC - AC type - B curve
Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3P+N	30	6	077428	DS203NC B6 AC30	2CSR256040R1065		0.480	1
		8	077329	DS203NC B8 AC30	2CSR256040R1085		0.480	1
		10	077220	DS203NC B10 AC30	2CSR256040R1105		0.480	1
		13	077121	DS203NC B13 AC30	2CSR256040R1135		0.480	1
		16	077022	DS203NC B16 AC30	2CSR256040R1165		0.480	1
		20	076926	DS203NC B20 AC30	2CSR256040R1205		0.480	1
		25	790525	DS203NC B25 AC30	2CSR256040R1255		0.480	1
		32	076827	DS203NC B32 AC30	2CSR256040R1325		0.480	1
	100	6	076728	DS203NC B6 AC100	2CSR256040R2065		0.480	1
		8	076629	DS203NC B8 AC100	2CSR256040R2085		0.480	1
		10	076520	DS203NC B10 AC100	2CSR256040R2105		0.480	1
		13	076421	DS203NC B13 AC100	2CSR256040R2135		0.480	1
		16	076322	DS203NC B16 AC100	2CSR256040R2165		0.480	1
		20	076223	DS203NC B20 AC100	2CSR256040R2205		0.480	1
		25	076124	DS203NC B25 AC100	2CSR256040R2255		0.480	1
		32	076025	DS203NC B32 AC100	2CSR256040R2325		0.480	1
	300	6	353423	DS203NC B6 AC300	2CSR256040R3065		0.480	1
		8	353324	DS203NC B8 AC300	2CSR256040R3085		0.480	1
		10	266327	DS203NC B10 AC300	2CSR256040R3105		0.480	1
		13	266228	DS203NC B13 AC300	2CSR256040R3135		0.480	1
		16	266129	DS203NC B16 AC300	2CSR256040R3165		0.480	1
		20	266020	DS203NC B20 AC300	2CSR256040R3205		0.480	1
		25	265924	DS203NC B25 AC300	2CSR256040R3255		0.480	1
		32	790822	DS203NC B32 AC300	2CSR256040R3325		0.480	1

RCBOs

DS203NC AC type

DS203NC - AC

DS203NC - AC type - C curve
Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3P+N	30	6	265825	DS203NC C6 AC30	2CSR256040R1064		0.480	1
		8	353225	DS203NC C8 AC30	2CSR256040R1084		0.480	1
		10	518228	DS203NC C10 AC30	2CSR256040R1104		0.480	1
		13	186823	DS203NC C13 AC30	2CSR256040R1134		0.480	1
		16	352228	DS203NC C16 AC30	2CSR256040R1164		0.480	1
		20	186724	DS203NC C20 AC30	2CSR256040R1204		0.480	1
		25	352129	DS203NC C25 AC30	2CSR256040R1254		0.480	1
		32	263920	DS203NC C32 AC30	2CSR256040R1324		0.480	1
	100	6	263821	DS203NC C6 AC100	2CSR256040R2064		0.480	1
		8	263722	DS203NC C8 AC100	2CSR256040R2084		0.480	1
		10	263623	DS203NC C10 AC100	2CSR256040R2104		0.480	1
		13	263524	DS203NC C13 AC100	2CSR256040R2134		0.480	1
		16	518327	DS203NC C16 AC100	2CSR256040R2164		0.480	1
		20	263425	DS203NC C20 AC100	2CSR256040R2204		0.480	1
		25	186021	DS203NC C25 AC100	2CSR256040R2254		0.480	1
		32	352020	DS203NC C32 AC100	2CSR256040R2324		0.480	1
	300	6	185925	DS203NC C6 AC300	2CSR256040R3064		0.480	1
		8	185826	DS203NC C8 AC300	2CSR256040R3084		0.480	1
		10	185727	DS203NC C10 AC300	2CSR256040R3104		0.480	1
		13	185628	DS203NC C13 AC300	2CSR256040R3134		0.480	1
		16	185529	DS203NC C16 AC300	2CSR256040R3164		0.480	1
		20	185420	DS203NC C20 AC300	2CSR256040R3204		0.480	1
		25	517825	DS203NC C25 AC300	2CSR256040R3254		0.480	1
		32	180821	DS203NC C32 AC300	2CSR256040R3324		0.480	1

RCBOs

DS203NC A type

DS203NC - A

DS203NC - A type - B curve
Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3P+N	30	6	078326	DS203NC B6 A30	2CSR256140R1065		0.480	1
		8	078227	DS203NC B8 A30	2CSR256140R1085		0.480	1
		10	078128	DS203NC B10 A30	2CSR256140R1105		0.480	1
		13	078029	DS203NC B13 A30	2CSR256140R1135		0.480	1
		16	077923	DS203NC B16 A30	2CSR256140R1165		0.480	1
		20	077824	DS203NC B20 A30	2CSR256140R1205		0.480	1
		25	077725	DS203NC B25 A30	2CSR256140R1255		0.480	1
		32	077626	DS203NC B32 A30	2CSR256140R1325		0.480	1
	100	6	080329	DS203NC B6 A100	2CSR256140R2065		0.480	1
		8	080220	DS203NC B8 A100	2CSR256140R2085		0.480	1
		10	080121	DS203NC B10 A100	2CSR256140R2105		0.480	1
		13	080022	DS203NC B13 A100	2CSR256140R2135		0.480	1
		16	079927	DS203NC B16 A100	2CSR256140R2165		0.480	1
		20	079828	DS203NC B20 A100	2CSR256140R2205		0.480	1
		25	079729	DS203NC B25 A100	2CSR256140R2255		0.480	1
		32	079620	DS203NC B32 A100	2CSR256140R2325		0.480	1
	300	6	079521	DS203NC B6 A300	2CSR256140R3065		0.480	1
		8	079422	DS203NC B8 A300	2CSR256140R3085		0.480	1
		10	079323	DS203NC B10 A300	2CSR256140R3105		0.480	1
		13	079224	DS203NC B13 A300	2CSR256140R3135		0.480	1
		16	305026	DS203NC B16 A300	2CSR256140R3165		0.480	1
		20	305125	DS203NC B20 A300	2CSR256140R3205		0.480	1
		25	400226	DS203NC B25 A300	2CSR256140R3255		0.480	1
		32	400028	DS203NC B32 A300	2CSR256140R3325		0.480	1

RCBOs

DS203NC A type

DS203NC - A

DS203NC - A type - C curve
Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3P+N	30	6	400127	DS203NC C6 A30	2CSR256140R1064		0.480	1
		8	058823	DS203NC C8 A30	2CSR256140R1084		0.480	1
		10	896524	DS203NC C10 A30	2CSR256140R1104		0.480	1
		13	768227	DS203NC C13 A30	2CSR256140R1134		0.480	1
		16	830924	DS203NC C16 A30	2CSR256140R1164		0.480	1
		20	839927	DS203NC C20 A30	2CSR256140R1204		0.480	1
		25	768524	DS203NC C25 A30	2CSR256140R1254		0.480	1
		32	831228	DS203NC C32 A30	2CSR256140R1324		0.480	1
	100	6	840220	DS203NC C6 A100	2CSR256140R2064		0.480	1
		8	896425	DS203NC C8 A100	2CSR256140R2084		0.480	1
		10	768128	DS203NC C10 A100	2CSR256140R2104		0.480	1
		13	830825	DS203NC C13 A100	2CSR256140R2134		0.480	1
		16	839828	DS203NC C16 A100	2CSR256140R2164		0.480	1
		20	896722	DS203NC C20 A100	2CSR256140R2204		0.480	1
		25	768425	DS203NC C25 A100	2CSR256140R2254		0.480	1
		32	831129	DS203NC C32 A100	2CSR256140R2324		0.480	1
	300	6	840121	DS203NC C6 A300	2CSR256140R3064		0.480	1
		8	830726	DS203NC C8 A300	2CSR256140R3084		0.480	1
		10	839729	DS203NC C10 A300	2CSR256140R3104		0.480	1
		13	896623	DS203NC C13 A300	2CSR256140R3134		0.480	1
		16	768326	DS203NC C16 A300	2CSR256140R3164		0.480	1
		20	831020	DS203NC C20 A300	2CSR256140R3204		0.480	1
		25	840022	DS203NC C25 A300	2CSR256140R3254		0.480	1
		32	631620	DS203NC C32 A300	2CSR256140R3324		0.480	1

RCBOs

DS203NC A type

DS203NC - A

DS203NC - A type - K curve
Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3P+N	30	6	376026	DS203NC K6 A30	2CSR256140R1067		0.480	1
		8	629726	DS203NC K8 A30	2CSR256140R1087		0.480	1
		10	375920	DS203NC K10 A30	2CSR256140R1107		0.480	1
		13	779322	DS203NC K13 A30	2CSR256140R1137		0.480	1
		16	769323	DS203NC K16 A30	2CSR256140R1167		0.480	1
		20	631521	DS203NC K20 A30	2CSR256140R1207		0.480	1
		25	375821	DS203NC K25 A30	2CSR256140R1257		0.480	1
		32	779223	DS203NC K32 A30	2CSR256140R1327		0.480	1
	100	6	593423	DS203NC K6 A100	2CSR256140R2067		0.480	1
		8	581628	DS203NC K8 A100	2CSR256140R2087		0.480	1
		10	569824	DS203NC K10 A100	2CSR256140R2107		0.480	1
		13	594727	DS203NC K13 A100	2CSR256140R2137		0.480	1
		16	582922	DS203NC K16 A100	2CSR256140R2167		0.480	1
		20	571124	DS203NC K20 A100	2CSR256140R2207		0.480	1
		25	592426	DS203NC K25 A100	2CSR256140R2257		0.480	1
		32	580621	DS203NC K32 A100	2CSR256140R2327		0.480	1

RCBOs

DS203NC APR type

DS203NC - APR

DS203NC - APR type - C curve
Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal compromise between safety and continuity of service, thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA); protection and isolation of resistive and inductive loads.

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3P+N	30	6	349822	DS203NC C6 APR30	2CSR256440R1064		0.480	1
		8	180722	DS203NC C8 APR30	2CSR256440R1084		0.480	1
		10	349723	DS203NC C10 APR30	2CSR256440R1104		0.480	1
		13	261520	DS203NC C13 APR30	2CSR256440R1134		0.480	1
		16	261421	DS203NC C16 APR30	2CSR256440R1164		0.480	1
		20	261322	DS203NC C20 APR30	2CSR256440R1204		0.480	1
		25	261223	DS203NC C25 APR30	2CSR256440R1254		0.480	1
		32	261124	DS203NC C32 APR30	2CSR256440R1324		0.480	1
	100	6	274223	DS203NC C6 APR100	2CSR256440R2064		0.480	1
		8	517924	DS203NC C8 APR100	2CSR256440R2084		0.480	1
		10	261025	DS203NC C10 APR100	2CSR256440R2104		0.480	1
		13	180029	DS203NC C13 APR100	2CSR256440R2134		0.480	1
		16	349624	DS203NC C16 APR100	2CSR256440R2164		0.480	1
		20	179924	DS203NC C20 APR100	2CSR256440R2204		0.480	1
		25	179825	DS203NC C25 APR100	2CSR256440R2254		0.480	1
		32	179726	DS203NC C32 APR100	2CSR256440R2324		0.480	1
	300	6	179627	DS203NC C6 APR300	2CSR256440R3064		0.480	1
		8	179528	DS203NC C8 APR300	2CSR256440R3084		0.480	1
		10	179429	DS203NC C10 APR300	2CSR256440R3104		0.480	1
		13	518020	DS203NC C13 APR300	2CSR256440R3134		0.480	1
		16	176329	DS203NC C16 APR300	2CSR256440R3164		0.480	1
		20	351023	DS203NC C20 APR300	2CSR256440R3204		0.480	1
		25	176220	DS203NC C25 APR300	2CSR256440R3254		0.480	1
		32	350927	DS203NC C32 APR300	2CSR256440R3324		0.480	1

RCBOs

DS203NC A S type

DS203NC - A S

DS203NC - A S type - C curve
Function: protection of end user three-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA). Selective type.

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6 000 A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3P+N	100	16	021827	DS203NC C16 A S100	2CSR256240R2164		0.480	1
		20	021728	DS203NC C20 A S100	2CSR256240R2204		0.480	1
		25	021629	DS203NC C25 A S100	2CSR256240R2254		0.480	1
		32	021520	DS203NC C32 A S100	2CSR256240R2324		0.480	1
	300	16	297727	DS203NC C16 A S300	2CSR256240R3164		0.480	1
		20	373223	DS203NC C20 A S300	2CSR256240R3204		0.480	1
		25	373124	DS203NC C25 A S300	2CSR256240R3254		0.480	1
		32	077527	DS203NC C32 A S300	2CSR256240R3324		0.480	1

RCBOs

DS 200 technical features

DS 200

	Standards		
Electrical features	Operating characteristic: type (wave form of the earth leakage sensed)		
	Poles		
	Rated sensitivity IΔn		A
	Rated current In		A
	Rated operational voltage Ue	2P	V
		3P, 4P	V
	Rated Insulation voltage Ui acc. to IEC/EN 60664-1		V
	Operating voltage of circuit test Ut	2P	V
		3P	V
		4P	V
	Rated frequency f		Hz
	Rated short circuit breaking capacity acc. to IEC/EN 61009-1	ultimate Icn	A
	Rated short circuit breking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate Icu	kA
		service Ics	kA
	Grid distance		mm
	Rated residual breaking capacity IΔm		kA
	Rated impulse withstand voltage Uimp. (1.2/50µs)		kV
	Dielectric test voltage at ind. freq. for 1 min.		kV
	Overvoltage category		
	Thermomagnetic release characteristic	B: 3 In ≤ Im ≤ 5 In	
		C: 5 In ≤ Im ≤ 10 In	
		K: 10 In ≤ Im ≤ 14 In	
	Surge current resistance (wave 8/20)		A
Mechanical features	Toggle Type	2P, 3P, 4P	
	Contact position indication		
	Electrical Endurance	cycles (OFF-ON-OFF)	
	Mechanical Endurance	cycles (OFF-ON-OFF)	
	Protection degree	housing	
		terminals	
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH
	Resistance to Shock acc. to IEC 60068-2-27		
	Resistance to Vibrations acc. to IEC 60068-2-6		
	Reference temperature for tripping characteristics		°C
	Ambient temperature (with daily average ≤ +35 °C)		°C
	Storage temperature		°C
Installation	Terminal type	top	
		bottom 2P	
		3P/4P In ≤ 40 A	
		3P/4P 50 A ≤ In ≤ 63 A	
	Cross-section of conductors (IEC)	2P	mm^2
		3P/4P In ≤ 40 A	mm^2
		3P/4P 50 A ≤ In ≤ 63 A	mm^2
	Cross-section of busbars (IEC)	2P	Nm
		3P/4P In ≤ 40 A	Nm
		3P/4P 50 A ≤ In ≤ 63 A	Nm
	Mounting Type		
	Mounting position		
	Connection		

① Available depending on type and characteristic curve. For 2P RCBOs A type B-C curves up to 32 A, refer to DS202CR 2 protected poles RCBOs in only two modules.
② Prior to connection of aluminium conductors (≥ 4 mm^2) ensure that their contact points are cleaned, brushed and coated with grease.

RCBOs

DS 200 technical features

DS 200 AC	DS 200 A	DS 200 M AC	DS 200 M A
IEC/EN 61009-1; IEC/EN 61009-2-1; IEC/EN 60947-2			
AC	A	AC	A
2P, 3P, 4P			
0.03			
6 ≤In ≤ 63 ①			
230-240			
230/400 - 240/415			
500			
110 (170 for 30 mA) - 254			
195 (300 for 30 mA) - 440			
195 (300 for 30 mA) - 440			
50…60			
6000	6000	10000	10000
10	10	15	15
7.5	7.5	11.2	11.2
35	35	35	35
6	6	10	10
6			
2.5			
III, disconnector abilities			
■	■	■	■
■	■	■	■
	■		
NA			
black (MCB) sealable in ON-OFF position + blue (RCD)			
CPI on window			
10000			
20000			
IP40			
IP20			
28 cycles with 55°C/90-96% and 25°C/95-100%			
25g - 2 shocks - 13ms			
0.1 mm or 1 g - 20 cycles at 5…150…5 Hz			
30			
-25…+55			
-40…+70			
failsafe bidirectional cylinder-lift terminal (shock protected) ②			
failsafe bidirectional cylinder-lift terminal (shock protected) ②			
cage (shock protected)			
failsafe bidirectional cylinder-lift terminal (shock protected) ②			
rigid: 35/25 flexible: 25/25			
rigid: 35/25 flexible: 25/16			
rigid : 35/25 flexible : 25/25			
2.8/2.8			
2.8/1.2			
2.8/2.8			
on DIN rail EN 60715 (35 mm) by means of fast clip device			
Any			
715 (35 mm) by means of fast clip devicefrom top and bottom			

RCBOs

DS 200 technical features

DS 200

Dimensions and weight	Dimensions (H x D x W)	2P	mm
		3P In ≤ 40 A	mm
		4P In ≤ 40 A	mm
		3P 50 A ≤ In ≤ 63 A	mm
		4P 50 A ≤ In ≤ 63 A	mm
	Weight	2P	g
		3P In ≤ 40 A	g
		4P In ≤ 40 A	g
		3P 50 A ≤ In ≤ 63 A	g
		4P 50 A ≤ In ≤ 63 A	g
Combination with auxiliary elements	Combinable with:	auxiliary contact	
		signal contact/auxiliary switch	
		shunt trip	
		undervoltage release	

RCBOs

DS 200 technical features

DS 200 AC	DS 200 A	DS 200 M AC	DS 200 M A
93 x 69 x 70 (in 4 modules)			
93 x 69 x 87.5 (in 5 modules)			
93 x 69 x 105 (in 6 modules)			
93 x 69 x 122.5 (in 7 modules)			
93 x 69 x 140 (in 8 modules)			
475			
625			
775			
775			
925			
yes			
yes			
yes			
yes			

RCBOs

DS 200 series 6000 - AC type, B characteristic

DS 202

DS203 6A to 40A

DS203 50A and 63A

DS204 6A to 40A

DS204 50A and 63A

DS 200 AC type, B characteristic
Function: protection against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct contacts.

Application: commercial, industrial, residential.
Standard: IEC/EN 61009-1, IEC/EN 61009-2-1 and IEC/EN 60947-2
Icn = 6 kA

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	6	863502	DS202 AC-B6/0.03	2CSR252001R1065		0.440	1
		10	863601	DS202 AC-B10/0.03	2CSR252001R1105		0.440	1
		13	863700	DS202 AC-B13/0.03	2CSR252001R1135		0.440	1
		16	863809	DS202 AC-B16/0.03	2CSR252001R1165		0.440	1
		20	863908	DS202 AC-B20/0.03	2CSR252001R1205		0.440	1
		25	864004	DS202 AC-B25/0.03	2CSR252001R1255		0.440	1
		32	864103	DS202 AC-B32/0.03	2CSR252001R1325		0.440	1
		40	864202	DS202 AC-B40/0.03	2CSR252001R1405		0.440	1
		50 ①	864301	DS202 AC-B50/0.03	2CSR252001R1505		0.440	1
		63 ①	864400	DS202 AC-B63/0.03	2CSR252001R1635		0.440	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	6	865506	DS203 AC-B6/0.03	2CSR253001R1065		0.610	1
		10	865605	DS203 AC-B10/0.03	2CSR253001R1105		0.610	1
		13	865704	DS203 AC-B13/0.03	2CSR253001R1135		0.610	1
		16	865803	DS203 AC-B16/0.03	2CSR253001R1165		0.610	1
		20	865902	DS203 AC-B20/0.03	2CSR253001R1205		0.610	1
		25	866008	DS203 AC-B25/0.03	2CSR253001R1255		0.610	1
		32	866107	DS203 AC-B32/0.03	2CSR253001R1325		0.610	1
		40	866206	DS203 AC-B40/0.03	2CSR253001R1405		0.610	1
		50 ①	866305	DS203 AC-B50/0.03	2CSR253001R1505		0.650	1
		63 ①	866404	DS203 AC-B63/0.03	2CSR253001R1635		0.650	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	6	867500	DS204 AC-B6/0.03	2CSR254001R1065		0.780	1
		10	867609	DS204 AC-B10/0.03	2CSR254001R1105		0.780	1
		13	867708	DS204 AC-B13/0.03	2CSR254001R1135		0.780	1
		16	867807	DS204 AC-B16/0.03	2CSR254001R1165		0.780	1
		20	867906	DS204 AC-B20/0.03	2CSR254001R1205		0.780	1
		25	868002	DS204 AC-B25/0.03	2CSR254001R1255		0.780	1
		32	868101	DS204 AC-B32/0.03	2CSR254001R1325		0.780	1
		40	868200	DS204 AC-B40/0.03	2CSR254001R1405		0.780	1
		50 ①	868309	DS204 AC-B50/0.03	2CSR254001R1505		0.825	1
		63 ①	868408	DS204 AC-B63/0.03	2CSR254001R1635		0.825	1

① provided with additional terminals for remote tripping.

RCBOs

DS 200 series 6000 - AC type, C characteristic

DS 202

DS203 6A to 40A

DS203 50A and 63A

DS204 6A to 40A

DS204 50A and 63A

DS 200 AC type, C characteristic
Function: protection against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct contacts.

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1 and IEC/EN 60947-2
Icn = 6 kA

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	6	869504	DS202 AC-C6/0.03	2CSR252001R1064		0.440	1
		10	869603	DS202 AC-C10/0.03	2CSR252001R1104		0.440	1
		13	869702	DS202 AC-C13/0.03	2CSR252001R1134		0.440	1
		16	869801	DS202 AC-C16/0.03	2CSR252001R1164		0.440	1
		20	869900	DS202 AC-C20/0.03	2CSR252001R1204		0.440	1
		25	870005	DS202 AC-C25/0.03	2CSR252001R1254		0.440	1
		32	870104	DS202 AC-C32/0.03	2CSR252001R1324		0.440	1
		40	870203	DS202 AC-C40/0.03	2CSR252001R1404		0.440	1
		50 ①	870302	DS202 AC-C50/0.03	2CSR252001R1504		0.440	1
		63 ①	870401	DS202 AC-C63/0.03	2CSR252001R1634		0.440	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	6	871507	DS203 AC-C6/0.03	2CSR253001R1064		0.610	1
		10	871606	DS203 AC-C10/0.03	2CSR253001R1104		0.610	1
		13	871705	DS203 AC-C13/0.03	2CSR253001R1134		0.610	1
		16	871804	DS203 AC-C16/0.03	2CSR253001R1164		0.610	1
		20	871903	DS203 AC-C20/0.03	2CSR253001R1204		0.610	1
		25	872009	DS203 AC-C25/0.03	2CSR253001R1254		0.610	1
		32	872108	DS203 AC-C32/0.03	2CSR253001R1324		0.610	1
		40	872207	DS203 AC-C40/0.03	2CSR253001R1404		0.610	1
		50 ①	872306	DS203 AC-C50/0.03	2CSR253001R1504		0.650	1
		63 ①	872405	DS203 AC-C63/0.03	2CSR253001R1634		0.650	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	6	873501	DS204 AC-C6/0.03	2CSR254001R1064		0.780	1
		10	873600	DS204 AC-C10/0.03	2CSR254001R1104		0.780	1
		13	873709	DS204 AC-C13/0.03	2CSR254001R1134		0.780	1
		16	873808	DS204 AC-C16/0.03	2CSR254001R1164		0.780	1
		20	873907	DS204 AC-C20/0.03	2CSR254001R1204		0.780	1
		25	874003	DS204 AC-C25/0.03	2CSR254001R1254		0.780	1
		32	874102	DS204 AC-C32/0.03	2CSR254001R1324		0.780	1
		40	874201	DS204 AC-C40/0.03	2CSR254001R1404		0.780	1
		50 ①	874300	DS204 AC-C50/0.03	2CSR254001R1504		0.825	1
		63 ①	874409	DS204 AC-C63/0.03	2CSR254001R1634		0.825	1

① provided with additional terminals for remote tripping.

RCBOs

DS 200 series 6000 - A type, B characteristic

DS 202

DS 200 A type, B characteristic
Function: protection against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts.

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1 and IEC/EN 60947-2
Icn = 6 kA

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	40	858201	DS202 A-B40/0.03	2CSR252101R1405		0.440	1
		50 ①	858300	DS202 A-B50/0.03	2CSR252101R1505		0.440	1
		63 ①	858409	DS202 A-B63/0.03	2CSR252101R1635		0.440	1

DS203 6A to 40A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	6	858508	DS203 A-B6/0.03	2CSR253101R1065		0.610	1
		10	858607	DS203 A-B10/0.03	2CSR253101R1105		0.610	1
		13	858706	DS203 A-B13/0.03	2CSR253101R1135		0.610	1
		16	858805	DS203 A-B16/0.03	2CSR253101R1165		0.610	1
		20	858904	DS203 A-B20/0.03	2CSR253101R1205		0.610	1
		25	859000	DS203 A-B25/0.03	2CSR253101R1255		0.610	1
		32	859109	DS203 A-B32/0.03	2CSR253101R1325		0.610	1
		40	859208	DS203 A-B40/0.03	2CSR253101R1405		0.610	1
		50 ①	859307	DS203 A-B50/0.03	2CSR253101R1505		0.650	1
		63 ①	859406	DS203 A-B63/0.03	2CSR253101R1635		0.650	1

DS203 50A and 63A

DS204 6A to 40A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	6	859505	DS204 A-B6/0.03	2CSR254101R1065		0.780	1
		10	859604	DS204 A-B10/0.03	2CSR254101R1105		0.780	1
		13	859703	DS204 A-B13/0.03	2CSR254101R1135		0.780	1
		16	859802	DS204 A-B16/0.03	2CSR254101R1165		0.780	1
		20	859901	DS204 A-B20/0.03	2CSR254101R1205		0.780	1
		25	860006	DS204 A-B25/0.03	2CSR254101R1255		0.780	1
		32	860105	DS204 A-B32/0.03	2CSR254101R1325		0.780	1
		40	860204	DS204 A-B40/0.03	2CSR254101R1405		0.780	1
		50 ①	860303	DS204 A-B50/0.03	2CSR254101R1505		0.825	1
		63 ①	860402	DS204 A-B63/0.03	2CSR254101R1635		0.825	1

DS204 50A and 63A

① provided with additional terminals for remote tripping.

RCBOs

DS 200 series 6000 - A type, C characteristic

DS 202

DS203 6A to 40A

DS203 50A and 63A

DS204 6A to 40A

DS204 50A and 63A

DS 200 A type, C characteristic
Function: protection against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts.

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1 and IEC/EN 60947-2
Icn = 6 kA

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	40	861201	DS202 A-C40/0.03	2CSR252101R1404		0.440	1
		50 ①	861300	DS202 A-C50/0.03	2CSR252101R1504		0.440	1
		63 ①	861409	DS202 A-C63/0.03	2CSR252101R1634		0.440	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	6	861508	DS203 A-C6/0.03	2CSR253101R1064		0.610	1
		10	861607	DS203 A-C10/0.03	2CSR253101R1104		0.610	1
		13	861706	DS203 A-C13/0.03	2CSR253101R1134		0.610	1
		16	861805	DS203 A-C16/0.03	2CSR253101R1164		0.610	1
		20	861904	DS203 A-C20/0.03	2CSR253101R1204		0.610	1
		25	862000	DS203 A-C25/0.03	2CSR253101R1254		0.610	1
		32	862109	DS203 A-C32/0.03	2CSR253101R1324		0.610	1
		40	862208	DS203 A-C40/0.03	2CSR253101R1404		0.610	1
		50 ①	862307	DS203 A-C50/0.03	2CSR253101R1504		0.650	1
		63 ①	862406	DS203 A-C63/0.03	2CSR253101R1634		0.650	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	6	862505	DS204 A-C6/0.03	2CSR254101R1064		0.780	1
		10	862604	DS204 A-C10/0.03	2CSR254101R1104		0.780	1
		13	862703	DS204 A-C13/0.03	2CSR254101R1134		0.780	1
		16	862802	DS204 A-C16/0.03	2CSR254101R1164		0.780	1
		20	862901	DS204 A-C20/0.03	2CSR254101R1204		0.780	1
		25	863007	DS204 A-C25/0.03	2CSR254101R1254		0.780	1
		32	863106	DS204 A-C32/0.03	2CSR254101R1324		0.780	1
		40	863205	DS204 A-C40/0.03	2CSR254101R1404		0.780	1
		50 ①	863304	DS204 A-C50/0.03	2CSR254101R1504		0.825	1
		63 ①	863403	DS204 A-C63/0.03	2CSR254101R1634		0.825	1

① provided with additional terminals for remote tripping.

RCBOs

DS 200 series 6000 - A type, K characteristic

DS 202

DS 200 A type, K characteristic
Function: protection and control against overloads and short-circuit in systems where motors, transformers and auxiliary circuits are present. Advantages: no unwanted release in case of currents peak up to 10 x In, according to the series; thanks to the high sensibility bimetal, the K curve switches offer protection of the sensible elements from overcurrents; they also allow the best protection of cables and lines.

Application: commercial, industrial.
Standard: IEC/EN 60947-2
Icn = 6 kA

DS203 6A to 40A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	6	930303	DS202 A-K6/0.03	2CSR252101R1067		0.475	1
		10	900702	DS202 A-K10/0.03	2CSR252101R1107		0.475	1
		13	930402	DS202 A-K13/0.03	2CSR252101R1137		0.475	1
		16	930501	DS202 A-K16/0.03	2CSR252101R1167		0.475	1
		20	930600	DS202 A-K20/0.03	2CSR252101R1207		0.475	1
		25	930709	DS202 A-K25/0.03	2CSR252101R1257		0.475	1
		32	930808	DS202 A-K32/0.03	2CSR252101R1327		0.475	1
		40	930907	DS202 A-K40/0.03	2CSR252101R1407		0.475	1
		50 ①	931003	DS202 A-K50/0.03	2CSR252101R1507		0.475	1
		63 ①	931102	DS202 A-K63/0.03	2CSR252101R1637		0.475	1

DS203 50A and 63A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	6	931201	DS204 A-K6/0.03	2CSR254101R1067		0.775	1
		10	931300	DS204 A-K10/0.03	2CSR254101R1107		0.775	1
		13	931409	DS204 A-K13/0.03	2CSR254101R1137		0.775	1
		16	931508	DS204 A-K16/0.03	2CSR254101R1167		0.775	1
		20	931607	DS204 A-K20/0.03	2CSR254101R1207		0.775	1
		25	931706	DS204 A-K25/0.03	2CSR254101R1257		0.775	1
		32	931805	DS204 A-K32/0.03	2CSR254101R1327		0.775	1
		40	931904	DS204 A-K40/0.03	2CSR254101R1407		0.775	1
		50 ①	932000	DS204 A-K50/0.03	2CSR254101R1507		0.775	1
		63 ①	932109	DS204 A-K63/0.03	2CSR254101R1637		0.775	1

① provided with additional terminals for remote tripping.

DS204 6A to 40A

DS204 50A and 63A

RCBOs

DS 200 M series 10000 - AC type, B characteristic

DS 202

DS203 6A to 40A

DS203 50A and 63A

DS204 6A to 40A

DS204 50A and 63A

DS 200 M AC type, B characteristic
Function: protection against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct contacts.

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10 kA

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	6	932208	DS202 M AC-B6/0.03	2CSR272001R1065		0.440	1
		10	932307	DS202 M AC-B10/0.03	2CSR272001R1105		0.440	1
		13	932406	DS202 M AC-B13/0.03	2CSR272001R1135		0.440	1
		16	932505	DS202 M AC-B16/0.03	2CSR272001R1165		0.440	1
		20	932604	DS202 M AC-B20/0.03	2CSR272001R1205		0.440	1
		25	932703	DS202 M AC-B25/0.03	2CSR272001R1255		0.440	1
		32	932802	DS202 M AC-B32/0.03	2CSR272001R1325		0.440	1
		40	932901	DS202 M AC-B40/0.03	2CSR272001R1405		0.440	1
		50 ①	933007	DS202 M AC-B50/0.03	2CSR272001R1505		0.440	1
		63 ①	933106	DS202 M AC-B63/0.03	2CSR272001R1635		0.440	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	6	933205	DS203 M AC-B6/0.03	2CSR273001R1065		0.610	1
		10	933304	DS203 M AC-B10/0.03	2CSR273001R1105		0.610	1
		13	933403	DS203 M AC-B13/0.03	2CSR273001R1135		0.610	1
		16	933502	DS203 M AC-B16/0.03	2CSR273001R1165		0.610	1
		20	933601	DS203 M AC-B20/0.03	2CSR273001R1205		0.610	1
		25	933700	DS203 M AC-B25/0.03	2CSR273001R1255		0.610	1
		32	933809	DS203 M AC-B32/0.03	2CSR273001R1325		0.610	1
		40	933908	DS203 M AC-B40/0.03	2CSR273001R1405		0.610	1
		50 ①	934004	DS203 M AC-B50/0.03	2CSR273001R1505		0.650	1
		63 ①	934103	DS203 M AC-B63/0.03	2CSR273001R1635		0.650	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	6	934202	DS204 M AC-B6/0.03	2CSR274001R1065		0.780	1
		10	934301	DS204 M AC-B10/0.03	2CSR274001R1105		0.780	1
		13	934400	DS204 M AC-B13/0.03	2CSR274001R1135		0.780	1
		16	934509	DS204 M AC-B16/0.03	2CSR274001R1165		0.780	1
		20	934608	DS204 M AC-B20/0.03	2CSR274001R1205		0.780	1
		25	934707	DS204 M AC-B25/0.03	2CSR274001R1255		0.780	1
		32	934806	DS204 M AC-B32/0.03	2CSR274001R1325		0.780	1
		40	934905	DS204 M AC-B40/0.03	2CSR274001R1405		0.780	1
		50 ①	935001	DS204 M AC-B50/0.03	2CSR274001R1505		0.825	1
		63 ①	935100	DS204 M AC-B63/0.03	2CSR274001R1635		0.825	1

① provided with additional terminals for remote tripping.

RCBOs

DS 200 M series 10000 - AC type, C characteristic

DS 202

DS203 6A to 40A

DS203 50A and 63A

DS204 6A to 40A

DS204 50A and 63A

DS 200 M AC type, C characteristic
Function: protection against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct contacts.

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10 kA

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	6	851509	DS202 M AC-C6/0.03	2CSR272001R1064		0.440	1
		10	851608	DS202 M AC-C10/0.03	2CSR272001R1104		0.440	1
		13	851707	DS202 M AC-C13/0.03	2CSR272001R1134		0.440	1
		16	851806	DS202 M AC-C16/0.03	2CSR272001R1164		0.440	1
		20	851905	DS202 M AC-C20/0.03	2CSR272001R1204		0.440	1
		25	852001	DS202 M AC-C25/0.03	2CSR272001R1254		0.440	1
		32	852100	DS202 M AC-C32/0.03	2CSR272001R1324		0.440	1
		40	852209	DS202 M AC-C40/0.03	2CSR272001R1404		0.440	1
		50 ①	852308	DS202 M AC-C50/0.03	2CSR272001R1504		0.440	1
		63 ①	852407	DS202 M AC-C63/0.03	2CSR272001R1634		0.440	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	6	852506	DS203 M AC-C6/0.03	2CSR273001R1064		0.610	1
		10	852605	DS203 M AC-C10/0.03	2CSR273001R1104		0.610	1
		13	852704	DS203 M AC-C13/0.03	2CSR273001R1134		0.610	1
		16	852803	DS203 M AC-C16/0.03	2CSR273001R1164		0.610	1
		20	852902	DS203 M AC-C20/0.03	2CSR273001R1204		0.610	1
		25	853008	DS203 M AC-C25/0.03	2CSR273001R1254		0.610	1
		32	853107	DS203 M AC-C32/0.03	2CSR273001R1324		0.610	1
		40	853206	DS203 M AC-C40/0.03	2CSR273001R1404		0.610	1
		50 ①	853305	DS203 M AC-C50/0.03	2CSR273001R1504		0.650	1
		63 ①	853404	DS203 M AC-C63/0.03	2CSR273001R1634		0.650	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	6	853503	DS204 M AC-C6/0.03	2CSR274001R1064		0.780	1
		10	853602	DS204 M AC-C10/0.03	2CSR274001R1104		0.780	1
		13	853701	DS204 M AC-C13/0.03	2CSR274001R1134		0.780	1
		16	853800	DS204 M AC-C16/0.03	2CSR274001R1164		0.780	1
		20	853909	DS204 M AC-C20/0.03	2CSR274001R1204		0.780	1
		25	854005	DS204 M AC-C25/0.03	2CSR274001R1254		0.780	1
		32	854104	DS204 M AC-C32/0.03	2CSR274001R1324		0.780	1
		40	854203	DS204 M AC-C40/0.03	2CSR274001R1404		0.780	1
		50 ①	854302	DS204 M AC-C50/0.03	2CSR274001R1504		0.825	1
		63 ①	854401	DS204 M AC-C63/0.03	2CSR274001R1634		0.825	1

① provided with additional terminals for remote tripping.

RCBOs

DS 200 M series 10000 - A type, B characteristic

DS 202

DS203 6A to 40A

DS203 50A and 63A

DS204 6A to 40A

DS204 50A and 63A

DS 200 M A type, B characteristic
Function: protection against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts.

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10 kA

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	40	846208	DS202 M A-B40/0.03	2CSR272101R1405		0.440	1
		50 ①	846307	DS202 M A-B50/0.03	2CSR272101R1505		0.440	1
		63 ①	846406	DS202 M A-B63/0.03	2CSR272101R1635		0.440	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	6	846505	DS203 M A-B6/0.03	2CSR273101R1065		0.610	1
		10	846604	DS203 M A-B10/0.03	2CSR273101R1105		0.610	1
		13	846703	DS203 M A-B13/0.03	2CSR273101R1135		0.610	1
		16	846802	DS203 M A-B16/0.03	2CSR273101R1165		0.610	1
		20	846901	DS203 M A-B20/0.03	2CSR273101R1205		0.610	1
		25	847007	DS203 M A-B25/0.03	2CSR273101R1255		0.610	1
		32	847106	DS203 M A-B32/0.03	2CSR273101R1325		0.610	1
		40	847205	DS203 M A-B40/0.03	2CSR273101R1405		0.610	1
		50 ①	847304	DS203 M A-B50/0.03	2CSR273101R1505		0.650	1
		63 ①	847403	DS203 M A-B63/0.03	2CSR273101R1635		0.650	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	6	847502	DS204 M A-B6/0.03	2CSR274101R1065		0.780	1
		10	847601	DS204 M A-B10/0.03	2CSR274101R1105		0.780	1
		13	847700	DS204 M A-B13/0.03	2CSR274101R1135		0.780	1
		16	847809	DS204 M A-B16/0.03	2CSR274101R1165		0.780	1
		20	847908	DS204 M A-B20/0.03	2CSR274101R1205		0.780	1
		25	848004	DS204 M A-B25/0.03	2CSR274101R1255		0.780	1
		32	848103	DS204 M A-B32/0.03	2CSR274101R1325		0.780	1
		40	848202	DS204 M A-B40/0.03	2CSR274101R1405		0.780	1
		50 ①	848301	DS204 M A-B50/0.03	2CSR274101R1505		0.825	1
		63 ①	848400	DS204 M A-B63/0.03	2CSR274101R1635		0.825	1

① provided with additional terminals for remote tripping.

RCBOs

DS 200 M series 10000 - A type, C characteristic

DS 202

DS203 6A to 40A

DS203 50A and 63A

DS 200 M A type, C characteristic
Function: protection against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct contacts.

Application: commercial, industrial.
Standard: IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10 kA

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	40	849209	DS202 M A-C40/0.03	2CSR272101R1404		0.440	1
		50 ①	849308	DS202 M A-C50/0.03	2CSR272101R1504		0.440	1
		63 ①	849407	DS202 M A-C63/0.03	2CSR272101R1634		0.440	1

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
3	30	6	849506	DS203 M A-C6/0.03	2CSR273101R1064		0.610	1
		10	849605	DS203 M A-C10/0.03	2CSR273101R1104		0.610	1
		13	849704	DS203 M A-C13/0.03	2CSR273101R1134		0.610	1
		16	849803	DS203 M A-C16/0.03	2CSR273101R1164		0.610	1
		20	849902	DS203 M A-C20/0.03	2CSR273101R1204		0.610	1
		25	850007	DS203 M A-C25/0.03	2CSR273101R1254		0.610	1
		32	850106	DS203 M A-C32/0.03	2CSR273101R1324		0.610	1
		40	850205	DS203 M A-C40/0.03	2CSR273101R1404		0.610	1
		50 ①	850304	DS203 M A-C50/0.03	2CSR273101R1504		0.650	1
		63 ①	850403	DS203 M A-C63/0.03	2CSR273101R1634		0.650	1

① provided with additional terminals for remote tripping.

RCBOs

DS 200 M series 10000 - A type, C characteristic

DS204 6A to 40A

DS204 50A and 63A

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	6	850502	DS204 M A-C6/0.03	2CSR274101R1064		0.780	1
		10	850601	DS204 M A-C10/0.03	2CSR274101R1104		0.780	1
		13	850700	DS204 M A-C13/0.03	2CSR274101R1134		0.780	1
		16	850809	DS204 M A-C16/0.03	2CSR274101R1164		0.780	1
		20	850908	DS204 M A-C20/0.03	2CSR274101R1204		0.780	1
		25	851004	DS204 M A-C25/0.03	2CSR274101R1254		0.780	1
		32	851103	DS204 M A-C32/0.03	2CSR274101R1324		0.780	1
		40	851202	DS204 M A-C40/0.03	2CSR274101R1404		0.780	1
		50 ①	851301	DS204 M A-C50/0.03	2CSR274101R1504		0.825	1
		63 ①	851400	DS204 M A-C63/0.03	2CSR274101R1634		0.825	1

① provided with additional terminals for remote tripping.

Notes

DS800P

Product at a glance

Product marking
Clear and easy identification of product name and relevant characteristics

QR code
Quick access to product main details and relevant documentation

Test button
Test pushbutton to verify the correct functioning of the device

Contact Position Indication (CPI)
Clear visualization of the device status

Technical Details
RCD technical details quick reference (wiring diagram, sensitivity, type)

RCD toggle Indication (CPI)
RCD block operating toggle can also be sealed into on/off position

RCBOs

DS800P technical features

DS800P

	Standards		
Electrical features	Operating characteristic: type (wave form of the earth leakage sensed)		
	Poles		
	Rated sensitivity IΔn		A
	Rated current In		A
	Rated voltage Ue		V
	Insulation voltage Ui		V
	Operating voltage of circuit test Ut		V
	Rated frequency		Hz
	Rated ultimate short-circuit breaking capacity Icu	240/415 V AC	kA
		254/440 V AC	kA
		289/500 V AC	kA
		400/690 V AC	kA
	Rated service short-circuit breaking capacity Ics	240/415 V AC	kA
	Rated impulse withstand voltage (1.2/50) Uimp		kV
	Dielectric test voltage at ind. freq. for 1 min.		kV
	Thermomagnetic release characteristic	B: 3 In ≤ Im ≤ 5 In	
		C: 5 In ≤ Im ≤ 10 In	
		D**: 10 In ≤ Im ≤ 20 In	
		K**: 10 In ≤ Im ≤ 16 In	
	Surge current resistance acc. to VDE 0432 Part 2 (wave 8/20)		A
Mechanical features	Toggle		
	Electrical Endurance		cycles (OFF-ON-OFF)
	Mechanical Endurance		cycles (OFF-ON-OFF)
	Protection degree	housing	
		terminals	
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH
	Ambient temperature (with daily average ≤ + 35 °C)		°C
	Storage temperature		°C
Installation	Terminal size for cables	flexible	mm^2
		rigid	mm^2
	Tightening torque		Nm
	Mounting		
Dimensions and weight	Dimensions (H x D x W)	2P	mm
		3P	mm
		4P	mm
	Weight	2P	g
		3P	g
		4P	g
Combination with auxiliary elements	Combinable with:	auxiliary contact	
		signal contact/ auxiliary switch	
		shunt trip	
		undervoltage release	

* 1A on 2P and 4P versions, while 0.3A only on 4P ones.
** as specified in standard IEC/EN 60947-2 the device withstands Im ≤ 6 In with guaranteed non intervention.

RCBOs

DS800P technical features

DS800P A	DS800P A S	DS800P A AP-R
IEC/EN 60947-2		
A	A	A
2P, 3P, 4P	2P,4P	2P, 3P, 4P
0.3	0.3-1(*)	0.03
125		
240/415-400/690		
690		
195-690		
50/60		
50	50	50
30	30	30
10	10	10
4.5	4.5	4.5
40	40	40
6		
2.5		
■	■	■
■	■	■
■	■	■
■	■	■
NA	5000	3000
black (MCB) sealable in ON-OFF position + blue (RCD) operating just from OFF position		
1000		
8000		
IP40		
IP20		
28 cycles with 55°C/90-96% and 25°C/95-100%		
-25…+60		
-40…+70		
25…50		
25…70		
3.5Nm		
on DIN rail EN 60715 (35 mm) by means of rapid fixing device		
108,2 x 82,3 x 138		
108,2 x 82,3 x 200,5		
108,2 x 82,3 x 227,5		
803		
1153		
1453		
yes		
yes		
yes		
yes		

DS800P
Type A / AS

DS800P A type

DS800P, A type
Function: protection against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts; command and isolation of resistive and inductive loads.
Application: industrial.
Standard: IEC/EN 60947-2
Icu = 50 kA

Number of poles	Curve	Rated residual current IΔn mA	Rated current [A]	Bbn 7612271 EAN	Order details		Weight [kg]	Pack. unit
					Type Code	Order code		
2	B	300	125	517793	DS802P-B125/0.3A	2CCG001310R0001	0.803	1
	C	300	125	517809	DS802P-C125/0.3A	2CCG001311R0001	0.803	1
	D	300	125	517816	DS802P-D125/0.3A	2CCG001312R0001	0.803	1
	K	300	125	517823	DS802P-K125/0.3A	2CCG001313R0001	0.803	1
3	B	300	125	517830	DS803P-B125/0.3A	2CCG001314R0001	1.153	1
	C	300	125	517847	DS803P-C125/0.3A	2CCG001315R0001	1.153	1
	D	300	125	517854	DS803P-D125/0.3A	2CCG001316R0001	1.153	1
	K	300	125	517861	DS803P-K125/0.3A	2CCG001317R0001	1.153	1
4	B	300	125	517878	DS804P-B125/0.3A	2CCG001318R0001	1.453	1
	C	300	125	517885	DS804P-C125/0.3A	2CCG001319R0001	1.453	1
	D	300	125	517892	DS804P-D125/0.3A	2CCG001320R0001	1.453	1
	K	300	125	517908	DS804P-K125/0.3A	2CCG001321R0001	1.453	1

DS800P AS type

DS800P A Selective Type
Function: protection against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents with an intentional tripping delay, which allows to realize the selectivity with downstream instantaneous devices (for more information about selectivity see the technical guide); protection against indirect contacts; command and isolation of resistive and inductive loads.
Application: industrial.
Standard: IEC/EN 60947-2
Icu = 50 kA

Number of poles	Curve	Rated residual current IΔn mA	Rated current [A]	Bbn 7612271 EAN	Order details		Weight [kg]	Pack. unit
					Type Code	Order code		
2	B	1000	125	517915	DS802P-B125/1AS	2CCG001322R0001	0.803	1
	C	1000	125	517922	DS802P-C125/1AS	2CCG001323R0001	0.803	1
	D	1000	125	517939	DS802P-D125/1AS	2CCG001324R0001	0.803	1
	K	1000	125	517946	DS802P-K125/1AS	2CCG001325R0001	0.803	1
4	B	300	125	517953	DS804P-B125/0.3AS	2CCG001326R0001	1.453	1
		1000	125	517960	DS804P-B125/1AS	2CCG001327R0001	1.453	1
	C	300	125	517977	DS804P-C125/0.3AS	2CCG001328R0001	1.453	1
		1000	125	517984	DS804P-C125/1AS	2CCG001329R0001	1.453	1
	D	300	125	517991	DS804P-D125/0.3AS	2CCG001330R0001	1.453	1
		1000	125	518004	DS804P-D125/1AS	2CCG001331R0001	1.453	1
	K	300	125	518011	DS804P-K125/0.3AS	2CCG001332R0001	1.453	1
		1000	125	518028	DS804P-K125/1AS	2CCG001333R0001	1.453	1

DS800P

Type A AP-R

DS800S AP-R, A type
Function: protection against the effects of sinusoidal alternating earth fault currents, providing the best compromise between safety and continuity in the service thanks to the resistance to unwanted trippings; protection against indirect contacts and additional protection against direct contacts (IΔn=30 mA); protection and isolation of resistive and inductive loads.
Application: industrial.
Standard: IEC/EN 60947-2
Icu = 50 kA

DS800P AP-R Type

Number of poles	Curve	Rated residual current IΔn mA	Rated current [A]	Bbn 7612271 EAN	Order details		Weight [kg]	Pack. unit
					Type Code	Order code		
2	B	30	125	518073	DS802P-B125/ 0.03AP-R	2CCG001338R0001	0.803	1
	C	30	125	518080	DS802P-C125/ 0.03AP-R	2CCG001339R0001	0.803	1
	D	30	125	518097	DS802P-D125/ 0.03AP-R	2CCG001340R0001	0.803	1
	K	30	125	518103	DS802P-K125/ 0.03AP-R	2CCG001341R0001	0.803	1
3	B	30	125	518110	DS803P-B125/ 0.03AP-R	2CCG001342R0001	1.153	1
	C	30	125	518127	DS803P-C125/ 0.03AP-R	2CCG001343R0001	1.153	1
	D	30	125	518134	DS803P-D125/ 0.03AP-R	2CCG001344R0001	1.153	1
	K	30	125	518141	DS803P-K125/ 0.03AP-R	2CCG001345R0001	1.153	1
4	B	30	125	518158	DS804P-B125/ 0.03AP-R	2CCG001346R0001	1.453	1
	C	30	125	518165	DS804P-C125/ 0.03AP-R	2CCG001347R0001	1.453	1
	D	30	125	518172	DS804P-D125/ 0.03AP-R	2CCG001348R0001	1.453	1
	K	30	125	518189	DS804P-K125/ 0.03AP-R	2CCG001349R0001	1.453	1

DS800P Dimension Diagrams

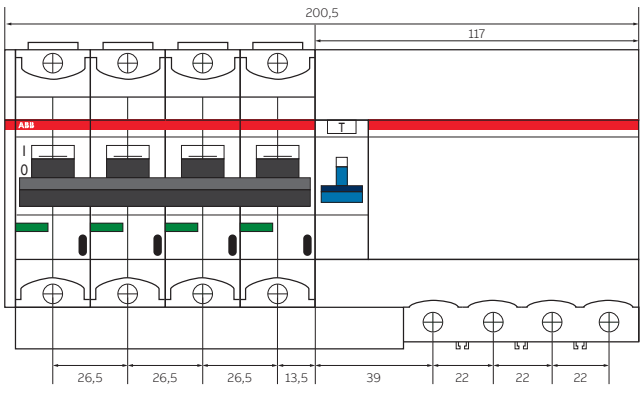

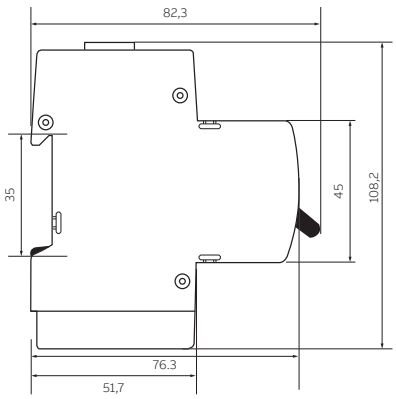

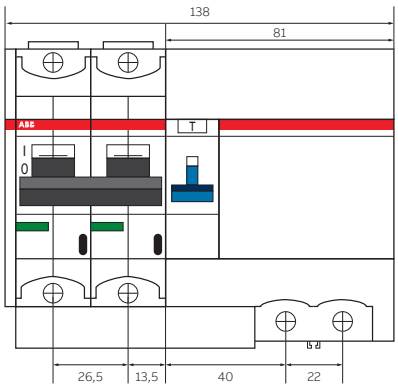

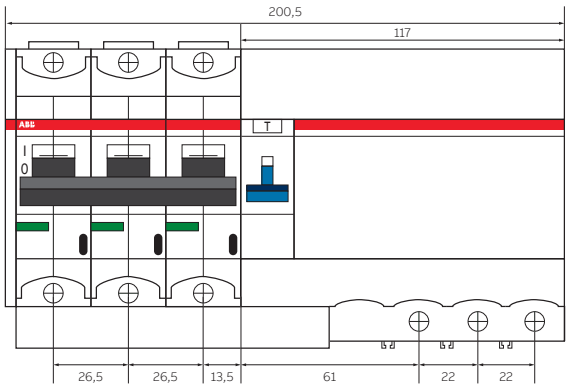

eRCBO, the value of quality

Made with attention to details

Space for insulated screwdrivers
The larger neutral hole allows the use of an insulated screwdriver to tighten the screw of neutral terminals, ensuring maximum operation safety. All versions are equipped with cage type terminals (16mm² load side), with tightening torque of 1.2 Nm.

Product coding
All the necessary technical and installation information can be found directly on the device. Product range, tripping characteristics, rated currents, sensitivity, type, breaking capacity, rated voltage, order code, EAN code, electrical scheme, reference standards and many other specifications are laser printed on the front and side of units.

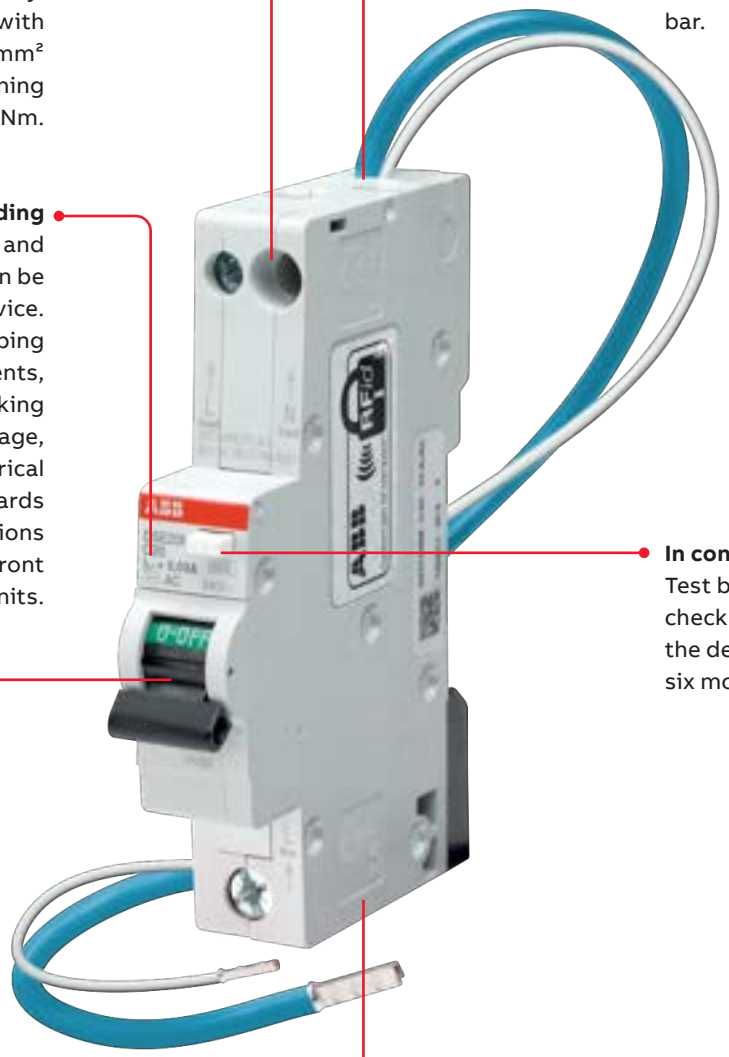

Real contact position indicator on toggle
Directly connected to the moving contact of the device, it indicates the exact position of the contacts at all times (red: closed contacts, green: open contacts).

Easy to install
Fast installation is supported by the two flying leads for neutral cable and functional earth, each integrated in the device, which can be directly connected to the main neutral bar and main earth bar.

In control
Test button allows the regular check of the functionality of the device: to be pushed every six months.

Reduced height
Thanks to its reduced height, only 100 mm, DSE201 makes easier wiring operation inside the consumer unit or the distribution board.

With its breaking capacity of 6kA in only one module width and 100mm height, the DSE201 series is the perfect solution for a complete protection in residential and light commercial applications. At home, in the office or in a shop, these devices are essential for the safety of people, utilities and equipment, protecting not only against earth fault residual currents - due to loss of isolation or accidental contact with live parts - but also against overcurrents.

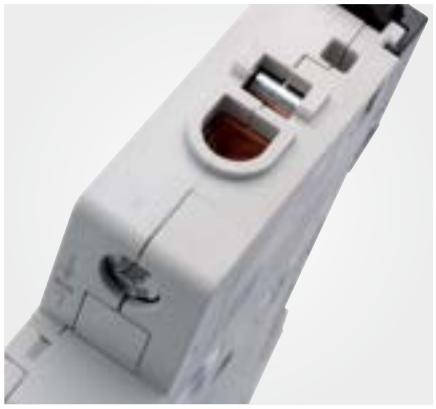

Double slot terminal
On the line side, the availability of a terminal with two slots allows to use different types of conductors: one housing is designed for cables up to 25 mm², the other for busbars or cables up to 10 mm².

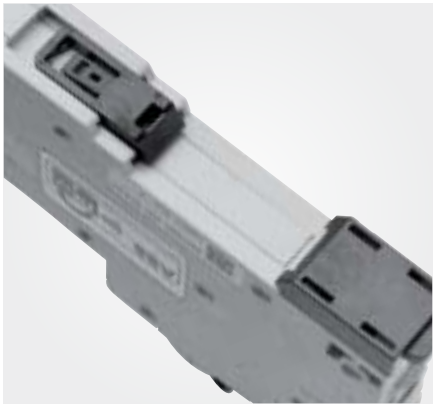

Easy and flexible
The double clip eases dismounting even when the unit is installed in a high density system. A single device can be removed from the cluster without disconnecting other units. The same screwdriver used to tighten terminals can also be used to unlock the DIN rail fixing device of the unit.

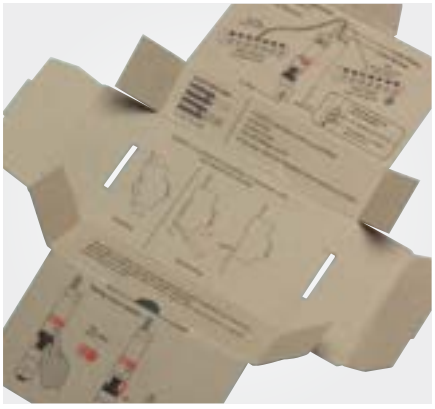

Environmentally friendly
The user manual is an integral part of the package. The information have been printed inside the box to make easy the reading and to reduce consumption of paper.

DSE201

Technical features and overall dimensions

Electrical features			
Standards			IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1
Type (wave form of the earth leakage sensed)			AC, A
Number of poles			1P+N
Rated current I_n		A	6≤ In ≤ 50
Rated sensitivity $I_{\Delta n}$		mA	30
Rated operational voltage U_e		V	230-240
Rated Insulation voltage U_i acc. to IEC/EN 60664-1		V	500 V AC
Overvoltage category			III
Pollution degree			2
Max. operating voltage		V	264
Min. operating voltage for protection against IΔn residual sinusoidal alternating currents		V	85
Operating voltage of circuit test		V	195 - 264
Rated frequency f		Hz	50/60
Rated short circuit breaking capacity acc. to IEC 61009-1	I_{cn}	A	6000
Rated residual breaking capacity IΔm according to IEC 61009-1	IΔm	kA	6
Grid distance		mm	35
Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)		kV	4 kV (test voltage 6.2kV at sea level, 5kV at 2000m)
Dielectric test voltage at ind. freq. for 1 min.		kV	2 kV (50 / 60Hz)
Tripping characteristic	B: $3\ I_n \le I_m \le 5\ I_n$		■
	C: $5\ I_n \le I_m \le 10\ I_n$		■
Mechanical data			
Housing type			insulation group II, RAL 7035
Toggle type			insulation group IIIA, black, sealable in ON-OFF positions
Contact position indication (CPI)			Red/Green marking on toggle (I ON / 0 OFF)
Electrical Endurance		cycles (OFF-ON-OFF)	10000
Mechanical Endurance		cycles (OFF-ON-OFF)	20000
Protecion degree acc. To EN 60529	housing		IP40
	terminals		IP20
Resistance to Shock acc. to IEC 60068-2-27			30g - 2 shocks - 13ms
Resistance to Vibrations acc. to IEC 60068-2-6			0.35mm or 5g - 20 cycles at 5...150...5 Hz without load
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55°C/90-96% and 25°C/95-100%
Reference temperature for tripping characteristics		°C	30
Ambient temperature (with daily average ≤ +35 °C)		°C	-25...+55
Storage temperature		°C	-40...+70

DSE201

Technical features and overall dimensions

Installation			
Terminal type	top (load side)		failsafe cage (shock protected)
	bottom (line side)		failsafe bi-directional cylinder-lift terminal (shock protected)
Cross-section of conductors	top	mm^2	16
	bottom	mm^2	25
Cross-section of busbars	top		only for wire connection
	bottom	mm^2	10 (Standard ABB busbar / distribution board system)
Tightening torque	top	Nm	1.2
	bottom	Nm	2.8
Wire Stripping Length	top	mm	11
	bottom	mm	12.5
Screwdriver			No. 2 Pozidrive
Neutral load cable	Type		low smoke halogen free
	Lenght	mm	750
	Section	mm^2	2.5 mm^2 up to 20 A; 4 mm^2 up to 50 A
	Color		blue (available also black)
Functional earth cable	Type		low smoke halogen free
	Lenght	mm	750
	Section	mm^2	0.75
	Color		white
Mounting Type			on DIN rail EN 60715 (35 mm) by means of fast clip device in consumer unit Type A according to IEC 61439-1&3, BS EN 61439-1&3, in distribution board Type B according to IEC 61439-1&3, BS EN 61439-1&3.
Mounting position			Any
Supply from			bottom terminal
Dimensions and weight			
Dimensions (H x D x W)		mm	100 x 68.9 x 17.6
Weight		g	180
Combination with auxiliary elements			
Combinable with accessories and auxiliaries			no

eRCBOs

DSE201 series 6000 A type, B and C characteristic

DSE201 ... A30

DSE201 A type, B and C characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA). The neutral is unswitched. Voltage dependent RCBO.

Application: residential, light commercial
Standard: IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1
Icn = 6 000 A

N. of poles	Rated residual current IΔn	Rated Current	Bbn 8012542 EAN	Order details		Weight 1 piece [kg]	Pack unit pc.
	[mA]	In [A]		Type code	Order code		
B characteristic							
1P+N	30	6	399629	DSE201 B6 A30	2CSR255151R1065	0.180	1
		10	399728	DSE201 B10 A30	2CSR255151R1105	0.180	1
		16	658924	DSE201 B16 A30	2CSR255151R1165	0.180	1
		20	658429	DSE201 B20 A30	2CSR255151R1205	0.180	1
		25	659921	DSE201 B25 A30	2CSR255151R1255	0.180	1
		32	659426	DSE201 B32 A30	2CSR255151R1325	0.180	1
		40	658627	DSE201 B40 A30	2CSR255151R1405	0.180	1
		50	179337	DSE201 B50 A30	2CSR255151R1505	0.200	1
C characteristic							
1P+N	30	6	658122	DSE201 C6 A30	2CSR255151R1064	0.180	1
		10	659624	DSE201 C10 A30	2CSR255151R1104	0.180	1
		16	910923	DSE201 C16 A30	2CSR255151R1164	0.180	1
		20	659129	DSE201 C20 A30	2CSR255151R1204	0.180	1
		25	658726	DSE201 C25 A30	2CSR255151R1254	0.180	1
		32	658221	DSE201 C32 A30	2CSR255151R1324	0.180	1
		40	659723	DSE201 C40 A30	2CSR255151R1404	0.180	1
		50	349532	DSE201 C50 A30	2CSR255151R1504	0.200	1

eRCBOs

DSE201 series 6000 AC type, B and C characteristic

DSE201 ... A30

DSE201 AC type, B and C characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA). The neutral is unswitched. Voltage dependent RCBO.

Application: residential, light commercial
Standard: IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1
Icn = 6 000 A

N. of poles	Rated residual current IΔn	Rated Current	Bbn 8012542 EAN	Order details		Weight 1 piece [kg]	Pack unit pc.
	[mA]	In [A]		Type code	Order code		
B characteristic							
1P+N	30	6	659228	DSE201 B6 AC30	2CSR255051R1065	0.180	1
		10	658825	DSE201 B10 AC30	2CSR255051R1105	0.180	1
		16	658320	DSE201 B16 AC30	2CSR255051R1165	0.180	1
		20	659822	DSE201 B20 AC30	2CSR255051R1205	0.180	1
		25	659327	DSE201 B25 AC30	2CSR255051R1255	0.180	1
		32	658528	DSE201 B32 AC30	2CSR255051R1325	0.180	1
		40	658023	DSE201 B40 AC30	2CSR255051R1405	0.180	1
		50	179238	DSE201 B50 AC30	2CSR255051R1505	0.200	1
C characteristic							
1P+N	30	6	659525	DSE201 C6 AC30	2CSR255051R1064	0.180	1
		10	910824	DSE201 C10 AC30	2CSR255051R1104	0.180	1
		16	659020	DSE201 C16 AC30	2CSR255051R1164	0.180	1
		20	660125	DSE201 C20 AC30	2CSR255051R1204	0.180	1
		25	660521	DSE201 C25 AC30	2CSR255051R1254	0.180	1
		32	660026	DSE201 C32 AC30	2CSR255051R1324	0.180	1
		40	660422	DSE201 C40 AC30	2CSR255051R1404	0.180	1
		50	349433	DSE201 C50 AC30	2CSR255051R1504	0.200	1

DSE201 M, unique solution

Features, which make operations friendly

Space for insulated screwdrivers
The larger neutral hole allows the use of an insulated screwdriver to tighten the screw of neutral terminals, ensuring maximum operation safety. All versions are equipped with cage type terminals (16mm² load side), with tightening torque of 1.2 Nm.

Earth fault indicator
Blue window in the front of the device to detect any earth fault trip: the cause of trip of the device can be identified in a short time, reducing the downtime for maintenance. DSE201 M is the only device equipped with an earth fault indicator between one module width electronic RCBOs.

Real contact position
indicator below the toggle Directly linked to the moving contact of the device, the green/red window in the front of the device can identify the current position of the contacts (open/closed) independently on the toggle position.

Combination with auxiliary elements
A platform suitable for quick installation in combination with the standard auxiliary elements that can be mounted with RCDs and MCBs.

Easy to install
Fast installation is supported by the two flying leads for neutral cable and functional earth, each integrated in the device, which can be directly connected to the main neutral bar and main earth bar.

In control
Test button allows the regular check of the functionality of the device: to be pushed every six months.

Reduced height
Thanks to its reduced height, only 115 mm, DSE201 M makes easier wiring operation inside the consumer unit or the distribution board.

DSE201 M, unique solution
Distinctive features

With its breaking capacity of 10kA in only one module width and 115mm height, DSE201 M series is the perfect solution for a complete protection in commercial and industrial applications, where space optimization is particularly required. The unique earth fault indicator window identifies any earth fault trip, making easier the troubleshooting on the network and reducing the downtime for maintenance.

Device status at a glance
Earth fault indicator: blue window above the toggle to immediately detect and identify any earth fault trip, reducing downtime for maintenance. Contact position indicator (CPI): green/red window below the toggle to identify the real position of the contacts independently on the toggle position.

Double slot terminal
Easy to install. Fail-safe line side terminal to avoid improper connection. Two slots of different dimensions (35 mm^2 and 10 mm^2) available to allow the connection both with cables and busbars.

Load side
Load side terminal accepts cables, both rigid and flexible up to 16 mm^2. Flying leads are straight instead of pigtail ones to reduce the space required for wiring operations.

Easy and flexible
Double and bistable clips with a design for a secure fixing in any type of consumer unit or distribution board. Easy removal from a cluster of RCBOs/ MCBs supplied with Busbars.

Smart case
Main technical information are laser-printed on the front and left side of product to ensure long readability. On the right side, the tightening torque and the stripping length of the cable for a correct and safety installation of the unit are molded.

Smart package
Instruction manual printed inside the box with no additional paper wasted. Packaging is glue-less and takes advantage of the adhesive label containing the order information.

DSE201 M

Technical features and overall dimensions

Electrical features			
Standards			IEC 61009-1 ; IEC 61009-2-2; BS EN 61009-1; AS/NZS 61009.1
Type (wave form of the earth leakage sensed)			AC, A
Number of poles			1P+N
Rated current I_n		A	6≤ In ≤ 50
Rated sensitivity $I_{\Delta n}$		mA	10-30-100-300
Rated operational voltage U_e		V	230-240
Rated Insulation voltage U_i acc. to IEC/EN 60664-1		V	500 V AC
Overvoltage category			III
Pollution degree			2
Max. operating voltage		V	264
Min. operating voltage for protection against $I_{\Delta n}$ residual sinusoidal alternating currents		V	85
Operating voltage of circuit test		V	195-264
Rated frequency f		Hz	50/60
Rated short circuit breaking capacity acc. to IEC 61009-1	I_{cn}	A	10000
Rated short circuit breaking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate I_{cu}	kA	15 (for 6A ≤ In ≤ 40A)
		kA	10 (for In = 50A)
	IΔm	kA	7.5
Rated residual breaking capacity IΔm according to IEC 61009-1		kA	10
Grid distance		mm	35
Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)		kV	4 kV (test voltage 6.2kV at sea level, 5kV at 2000m)
Dielectric test voltage at ind. freq. for 1 min.		kV	2 kV (50 / 60Hz)
Tripping characteristic	B: $3\ I_n \le I_m \le 5\ I_n$		■
	C: $5\ I_n \le I_m \le 10\ I_n$		■
Mechanical data			
Housing type			insulation group II, RAL 7035
Toggle type			insulation group II, black, sealable in ON-OFF positions
Earth fault trip indication			blue window
Contact position indication (CPI)			green/red Window
Electrical Endurance		cycles (OFF-ON-OFF)	10000
Mechanical Endurance		cycles (OFF-ON-OFF)	20000
Protecion degree acc. To EN 60529	housing		IP40
	terminals		IP20
Resistance to Shock acc. to IEC 60068-2-27			30g - 2 shocks - 13ms
Resistance to Vibrations acc. to IEC 60068-2-6			0.35mm or 5g - 20 cycles at 5...150...5 Hz without load
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55°C/90-96% and 25°C/95-100%
Reference temperature for tripping characteristics		°C	30
Ambient temperature (with daily average ≤ +35 °C)		°C	-25...+55
Storage temperature		°C	-40...+70

DSE201 M

Technical features and overall dimensions

Installation			
Terminal type	top (load side)		failsafe cage (shock protected)
	bottom (line side)		failsafe bi-directional cylinder-lift terminal (shock protected)
Cross-section of conductors	top	mm²	16
	bottom (Solid/Flexible)	mm²	35/25
Cross-section of busbars	top		only for wire connection
	bottom	mm²	10 (Standard ABB busbar / distribution board system)
Tightening torque	top	Nm	1.2
	bottom	Nm	2.8
Wire Stripping Length	top	mm	11
	bottom	mm	12.5
Screwdriver			No. 2 Pozidrive
Neutral load cable	Type		low smoke halogen free
	Lenght	mm	750
	Section	mm²	2.5 mm² up to 20 A; 4 mm² up to 50 A
	Color		blue (available also black)
Functional earth cable	Type		low smoke halogen free
	Lenght	mm	750
	Section	mm²	0.75
	Color		white
Mounting type			on DIN rail EN 60715 (35 mm) by means of fast clip device in consumer unit Type A according to IEC 61439-1&3, BS EN 61439-1&3 in distribution board Type B according to IEC 61439-1&3, BS EN 61439-1&3
Mounting position			Any
Supply from			bottom terminal
Dimensions and weight			
Dimensions (H x D x W)		mm	115 x 68.9 x 17.6
Weight		g	200
Combination with auxiliary elements			
Auxiliary contact			yes
Auxiliary/Signal contact			yes
Shunt trip			yes
Undervoltage release			yes
Overvoltage release			yes
Bottom fitting auxiliary contact			yes

eRCBOs

DSE201 M series 10000 A type, B characteristic

DSE201 M ... A30

DSE201 M A type, B characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA). The neutral is unswitched. Voltage dependent RCBO.

Application: commercial, industrial
Standard: IEC 61009-1; IEC 61009-2-2; BS EN 61009-1; AS/NZS 61009.1
Icn = 10 000 A

N. of poles	Rated residual current IΔn	Rated Current	Bbn 8012542 EAN	Order details		Weight 1 piece [kg]	Pack unit pc.
	[mA]	In [A]		Type code	Order code		
B characteristic							
1P+N	10	6	079231	DSE201 M B6 A10	2CSR275151R0065	0.200	1
		10	305033	DSE201 M B10 A10	2CSR275151R0105	0.200	1
		16	305132	DSE201 M B16 A10	2CSR275151R0165	0.200	1
		20	400233	DSE201 M B20 A10	2CSR275151R0205	0.200	1
		25	400035	DSE201 M B25 A10	2CSR275151R0255	0.200	1
		32	400134	DSE201 M B32 A10	2CSR275151R0325	0.200	1
		40	058830	DSE201 M B40 A10	2CSR275151R0405	0.200	1
		50	896531	DSE201 M B50 A10	2CSR275151R0505	0.200	1
1P+N	30	6	830832	DSE201 M B6 A30	2CSR275151R1065	0.200	1
		10	839835	DSE201 M B10 A30	2CSR275151R1105	0.200	1
		16	896739	DSE201 M B16 A30	2CSR275151R1165	0.200	1
		20	768432	DSE201 M B20 A30	2CSR275151R1205	0.200	1
		25	831136	DSE201 M B25 A30	2CSR275151R1255	0.200	1
		32	840138	DSE201 M B32 A30	2CSR275151R1325	0.200	1
		40	830733	DSE201 M B40 A30	2CSR275151R1405	0.200	1
		50	839736	DSE201 M B50 A30	2CSR275151R1505	0.200	1

eRCBOs

DSE201 M series 10000 A type, C characteristic

DSE201 M ... A300

DSE201 M A type, C characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA). The neutral is unswitched. Voltage dependent RCBO.

Application: commercial, industrial
Standard: IEC 61009-1; IEC 61009-2-2; BS EN 61009-1; AS/NZS 61009.1
Icn = 10 000 A

N. of poles	Rated residual current IΔn	Rated Current	Bbn 8012542 EAN	Order details		Weight 1 piece [kg]	Pack unit pc.
	[mA]	In [A]		Type code	Order code		
C characteristic							
1P+N	10	6	768234	DSE201 M C6 A10	2CSR275151R0064	0.200	1
		10	830931	DSE201 M C10 A10	2CSR275151R0104	0.200	1
		16	839934	DSE201 M C16 A10	2CSR275151R0164	0.200	1
		20	768531	DSE201 M C20 A10	2CSR275151R0204	0.200	1
		25	831235	DSE201 M C25 A10	2CSR275151R0254	0.200	1
		32	840237	DSE201 M C32 A10	2CSR275151R0324	0.200	1
		40	896432	DSE201 M C40 A10	2CSR275151R0404	0.200	1
		50	768135	DSE201 M C50 A10	2CSR275151R0504	0.200	1
1P+N	30	6	896630	DSE201 M C6 A30	2CSR275151R1064	0.200	1
		10	768333	DSE201 M C10 A30	2CSR275151R1104	0.200	1
		16	831037	DSE201 M C16 A30	2CSR275151R1164	0.200	1
		20	840039	DSE201 M C20 A30	2CSR275151R1204	0.200	1
		25	631637	DSE201 M C25 A30	2CSR275151R1254	0.200	1
		32	376033	DSE201 M C32 A30	2CSR275151R1324	0.200	1
		40	629733	DSE201 M C40 A30	2CSR275151R1404	0.200	1
		50	375937	DSE201 M C50 A30	2CSR275151R1504	0.200	1
1P+N	100	6	779339	DSE201 M C6 A100	2CSR275151R2064	0.200	1
		10	769330	DSE201 M C10 A100	2CSR275151R2104	0.200	1
		16	631538	DSE201 M C16 A100	2CSR275151R2164	0.200	1
		20	375838	DSE201 M C20 A100	2CSR275151R2204	0.200	1
		25	779230	DSE201 M C25 A100	2CSR275151R2254	0.200	1
		32	631439	DSE201 M C32 A100	2CSR275151R2324	0.200	1
		40	940739	DSE201 M C40 A100	2CSR275151R2404	0.200	1
		50	941330	DSE201 M C50 A100	2CSR275151R2504	0.200	1
1P+N	300	6	620235	DSE201 M C6 A300	2CSR275151R3064	0.200	1
		10	021834	DSE201 M C10 A300	2CSR275151R3104	0.200	1
		16	021735	DSE201 M C16 A300	2CSR275151R3164	0.200	1
		20	021636	DSE201 M C20 A300	2CSR275151R3204	0.200	1
		25	021537	DSE201 M C25 A300	2CSR275151R3254	0.200	1
		32	021438	DSE201 M C32 A300	2CSR275151R3324	0.200	1
		40	021339	DSE201 M C40 A300	2CSR275151R3404	0.200	1
		50	021230	DSE201 M C50 A300	2CSR275151R3504	0.200	1

eRCBOs

DSE201 M series 10000 AC type, B characteristic

DSE201 M ... A30

DSE201 M AC type, B characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA). The neutral is unswitched. Voltage dependent RCBO.

Application: commercial, industrial
Standard: IEC 61009-1; IEC 61009-2-2; BS EN 61009-1; AS/NZS 61009.1
Icn = 10 000 A

N. of poles	Rated residual current IΔn	Rated Current	Bbn 8012542 EAN	Order details		Weight 1 piece [kg]	Pack unit pc.
	[mA]	In [A]		Type code	Order code		
B characteristic							
1P+N	10	6	938132	DSE201 M B6 AC10	2CSR275051R0065	0.200	1
		10	297734	DSE201 M B10 AC10	2CSR275051R0105	0.200	1
		16	373230	DSE201 M B16 AC10	2CSR275051R0165	0.200	1
		20	373131	DSE201 M B20 AC10	2CSR275051R0205	0.200	1
		25	077534	DSE201 M B25 AC10	2CSR275051R0255	0.200	1
		32	077435	DSE201 M B32 AC10	2CSR275051R0325	0.200	1
		40	077336	DSE201 M B40 AC10	2CSR275051R0405	0.200	1
		50	077237	DSE201 M B50 AC10	2CSR275051R0505	0.200	1
1P+N	30	6	076438	DSE201 M B6 AC30	2CSR275051R1065	0.200	1
		10	076339	DSE201 M B10 AC30	2CSR275051R1105	0.200	1
		16	076230	DSE201 M B16 AC30	2CSR275051R1165	0.200	1
		20	076131	DSE201 M B20 AC30	2CSR275051R1205	0.200	1
		25	076032	DSE201 M B25 AC30	2CSR275051R1255	0.200	1
		32	353430	DSE201 M B32 AC30	2CSR275051R1325	0.200	1
		40	353331	DSE201 M B40 AC30	2CSR275051R1405	0.200	1
		50	266334	DSE201 M B50 AC30	2CSR275051R1505	0.200	1

eRCBOs

DSE201 M series 10000 AC type, C characteristic

DSE201 M ... A300

DSE201 M AC type, C characteristic
Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA). The neutral is unswitched. Voltage dependent RCBO.

Application: commercial, industrial
Standard: IEC 61009-1; IEC 61009-2-2; BS EN 61009-1; AS/NZS 61009.1
Icn = 10 000 A

N. of poles	Rated residual current IΔn	Rated Current	Bbn 8012542 EAN	Order details		Weight 1 piece [kg]	Pack unit pc.
	[mA]	In [A]		Type code	Order code		
C characteristic							
1P+N	10	6	077138	DSE201 M C6 AC10	2CSR275051R0064	0.200	1
		10	077039	DSE201 M C10 AC10	2CSR275051R0104	0.200	1
		16	076933	DSE201 M C16 AC10	2CSR275051R0164	0.200	1
		20	790532	DSE201 M C20 AC10	2CSR275051R0204	0.200	1
		25	076834	DSE201 M C25 AC10	2CSR275051R0254	0.200	1
		32	076735	DSE201 M C32 AC10	2CSR275051R0324	0.200	1
		40	076636	DSE201 M C40 AC10	2CSR275051R0404	0.200	1
		50	076537	DSE201 M C50 AC10	2CSR275051R0504	0.200	1
1P+N	30	6	266235	DSE201 M C6 AC30	2CSR275051R1064	0.200	1
		10	266136	DSE201 M C10 AC30	2CSR275051R1104	0.200	1
		16	266037	DSE201 M C16 AC30	2CSR275051R1164	0.200	1
		20	265931	DSE201 M C20 AC30	2CSR275051R1204	0.200	1
		25	790839	DSE201 M C25 AC30	2CSR275051R1254	0.200	1
		32	265832	DSE201 M C32 AC30	2CSR275051R1324	0.200	1
		40	353232	DSE201 M C40 AC30	2CSR275051R1404	0.200	1
		50	518235	DSE201 M C50 AC30	2CSR275051R1504	0.200	1
1P+N	100	6	186830	DSE201 M C6 AC100	2CSR275051R2064	0.200	1
		10	352235	DSE201 M C10 AC100	2CSR275051R2104	0.200	1
		16	186731	DSE201 M C16 AC100	2CSR275051R2164	0.200	1
		20	352136	DSE201 M C20 AC100	2CSR275051R2204	0.200	1
		25	263937	DSE201 M C25 AC100	2CSR275051R2254	0.200	1
		32	263838	DSE201 M C32 AC100	2CSR275051R2324	0.200	1
		40	263739	DSE201 M C40 AC100	2CSR275051R2404	0.200	1
		50	263630	DSE201 M C50 AC100	2CSR275051R2504	0.200	1
1P+N	300	6	263531	DSE201 M C6 AC300	2CSR275051R3064	0.200	1
		10	518334	DSE201 M C10 AC300	2CSR275051R3104	0.200	1
		16	263432	DSE201 M C16 AC300	2CSR275051R3164	0.200	1
		20	186038	DSE201 M C20 AC300	2CSR275051R3204	0.200	1
		25	352037	DSE201 M C25 AC300	2CSR275051R3254	0.200	1
		32	185932	DSE201 M C32 AC300	2CSR275051R3324	0.200	1
		40	185833	DSE201 M C40 AC300	2CSR275051R3404	0.200	1
		50	185734	DSE201 M C50 AC300	2CSR275051R3504	0.200	1

DSE203 M eRCBO 3P 3M
DSE203N M eRCBO 3P+N 3M
DSE203NS M eRCBO 3P+ Nsw 4M

Products at a glance

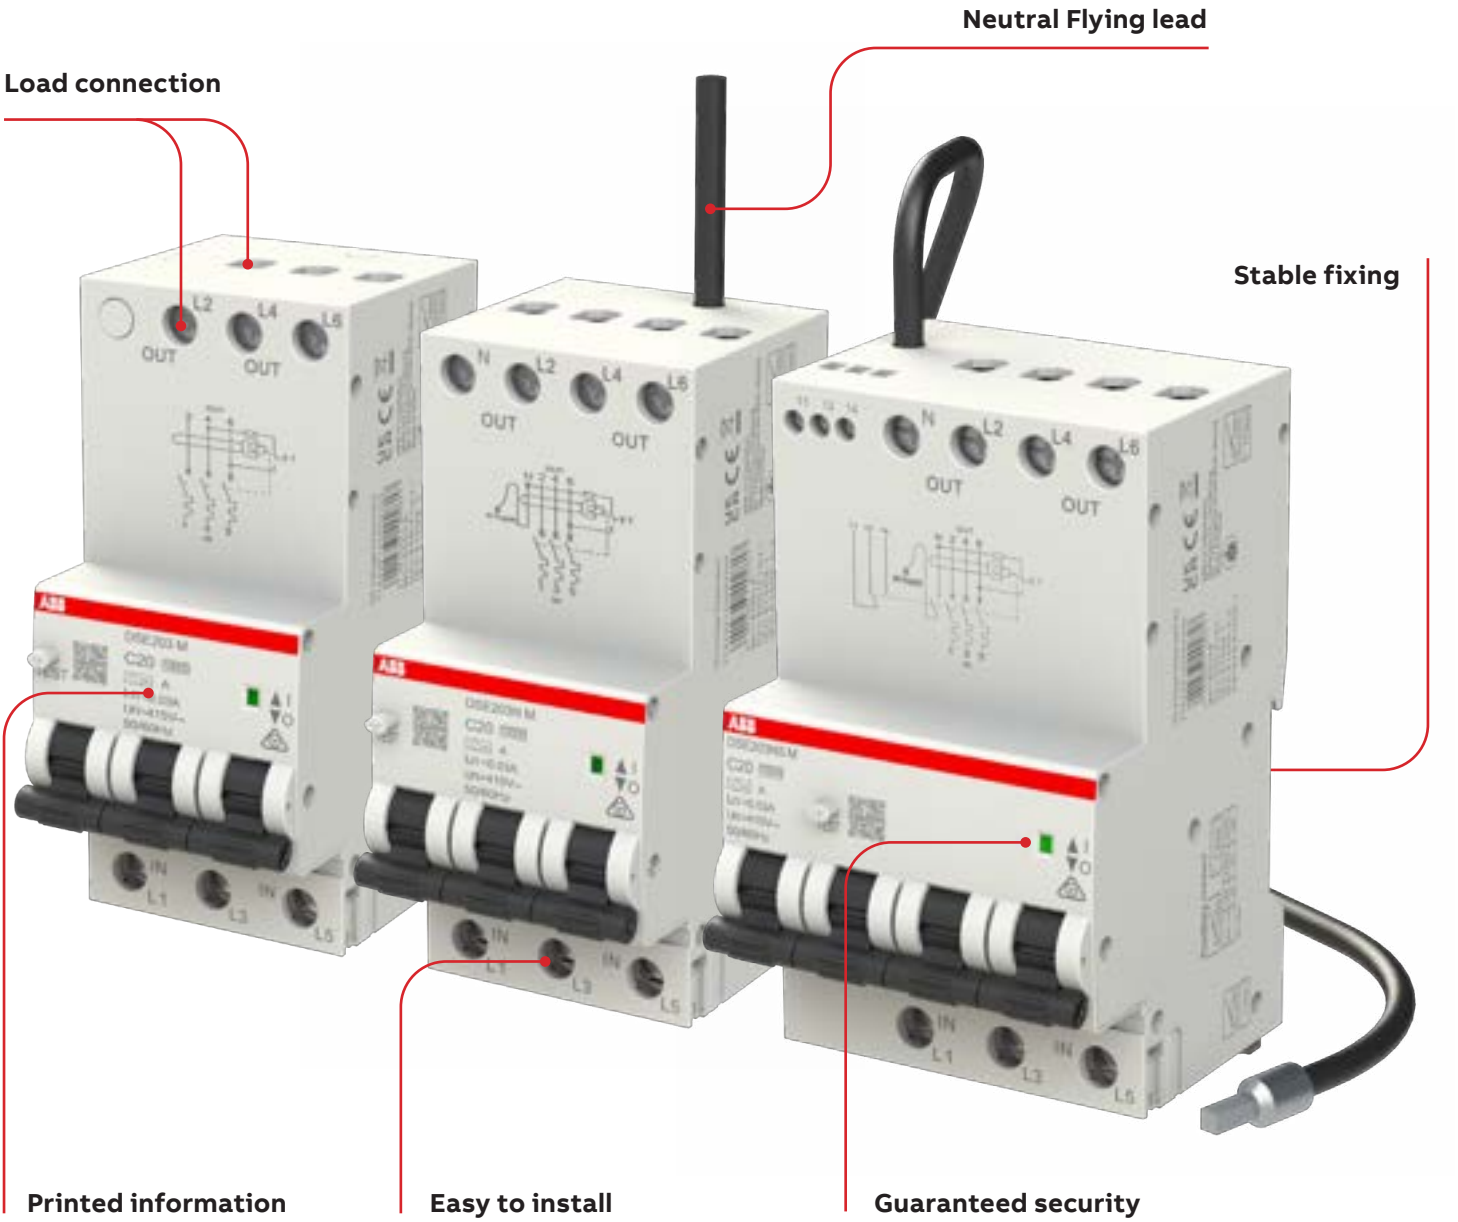

Guaranteed security
The Contact Position Indicator (CPI) provides a clear visual indication of the contact status, operating independently from the toggle position. A green color indicates that the contacts are open, while a red color signifies that the contacts are closed.

Stable fixing
The device features two clips located on the bottom side, which ensure secure and stable mounting on both chassis and DIN-Rail systems. This design helps maintain the device's position during use, enhancing safety and reliability.

Printed information
Main technical specifications and information are printed directly on the front side of the device. This ensures that important details are easily visible even after installation, providing quick and convenient reference for users and technicians.

Monitor contacts status
DSE203NS M series is integrated with auxiliary contact, giving the possibility to monitor the status of the contacts.

Easy to install
The device supports supply connections from the bottom and load connection from the top terminals, for quick installations in chassis distribution boards and on DIN-Rail systems.

Neutral Flying lead
The neutral connection is supplied from the top via a solid cable, except for DSE203 M where the neutral is not present. The neutral is unswitched on DSE203N M and switched on DSE203NS M.

DSE203xx x Datasheet

Technical features

			DSE203N M	DSE203M	DSE203NS M
Standards			IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1		
Electrical features					
Type (wave form of the earth leakage sensed)			A		
Number of poles			3P+N	3P	3P+N (switched)
Rated current In		A	6 ≤ In ≤ 63		
Rated sensitivity IΔn		A	0.01; 0.03; 0.1; 0.3	0.03; 0.1; 0.3	0.03; 0.1; 0.3
Rated operational voltage Ue		V	400/415		
Rated Insulation voltage Ui acc. to IEC/EN 60664-1		V	500V AC/DC		
Overvoltage category			III		
Pollution degree			2		
Operating voltage of circuit test Ut		V	204 - 457		
Max operating voltage		V	457		
Min. operating voltage for protection against IΔn residual sinusoidal alternating currents		V	150		
Rated frequency f		Hz	50/60		
Rated short circuit breaking capacity acc. to IEC/EN 61009-1	Icn	A	10000		
Rated residual breaking capacity IΔm to IEC 61009-1	IΔm	A	6000		
Grid distance		mm	60		
Rated impulse withstand voltage Uimp. (1.2/50µs)		kV	4		
Dielectric test voltage at ind. freq. for 1 min.		kV	2 kV (50 / 60Hz)		
Thermomagnetic release - characteristic	B: 3 In ≤ Im ≤ 5 In		■		
	C: 5 In ≤ Im ≤ 10 In		■		
	D: 10 In ≤ Im ≤ 20 In		■		
Mechanical features					
Housing type			Insulation group I		
Toggle type			Insulation group II		
Contact position indication (CPI)			Green/Red window		
Electrical Endurance		cycles (OFF-ON-OFF)	10000		
Mechanical Endurance		cycles (OFF-ON-OFF)	20000		
Protection degree acc. to EN 60529	housing		IP40		
	terminals		IP20		
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55°C/90-96% and 25°C/95-100%		
Reference temperature for tripping characteristics		°C	30		
Ambient temperature (with daily average ≤ +35 °C)		°C	-5...+55		
Storage temperature		°C	-25...+70		
Installation					
Terminal type	top / bottom		pillar terminals		
Cross-section of conductors	top / bottom	mm^2	16/16 flexible; 25/25 rigid		
Cross-section of busbars	top / bottom	mm^2	10/10		
Tightening torque		Nm	2.5		
Wire Stripping Length	top / bottom	mm	11.5/15		
Screwdriver			No. 2 Pozidrive		
Neutral cable	Lenght	mm	1000	-	1000
	Section	mm^2	6...25A: 2.5mm^2; 32, 40A: 4mm^2; 50, 63A: 6mm^2	-	6...25A: 2.5mm^2; 32-40A: 4mm^2; 50-63A: 6mm^2
	Color		Black	-	Black
Mounting type			on DIN rail EN 60715 (35mm) by means of mounting clip		
Mounting position			Vertical & Horizontal		
Supply from			Bottom terminals		
Dimensions and weight					
Dimensions (H x D x W)		mm	117.5 x71.6 x 53.4	117.5 x 71.6 x 53.4	117.5 x 71.6 x 71.2
Weight		g	549	488	637
Integrated auxiliary contact features					
Utilization category	AC- 14		-	-	2A/230V; 3A/110V
Conventional free air thermal current	Ith	A	-	-	5
Tightening torque		Nm	-	-	0.4
Wire Stripping Length		mm	-	-	10
Cross-section of conductors		mm^2	-	-	1.5

DSE203 M

Ordering data

DSE203 M: 3P eRCBO
Function: protection and control of the circuits against overloads and short-circuits; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA). Voltage dependent RCBO.

Applications: residential, commercial, industrial
Standard: IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1

N. Poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
3	10 kA	A	30	B	6	6941593492961	DSE203 M B6 A30	2TAZ261304R2064	0.488	1
					10	6941593492978	DSE203 M B10 A30	2TAZ261304R2104	0.488	1
					16	6941593492985	DSE203 M B16 A30	2TAZ261304R2164	0.488	1
					20	6941593492992	DSE203 M B20 A30	2TAZ261304R2204	0.488	1
					25	6941593493005	DSE203 M B25 A30	2TAZ261304R2254	0.488	1
					32	6941593493012	DSE203 M B32 A30	2TAZ261304R2324	0.488	1
					40	6941593493029	DSE203 M B40 A30	2TAZ261304R2404	0.488	1
					50	6941593493036	DSE203 M B50 A30	2TAZ261304R2504	0.488	1
					63	6941593493043	DSE203 M B63 A30	2TAZ261304R2634	0.488	1
				C	6	6941593492787	DSE203 M C6 A30	2TAZ261304R2065	0.488	1
					10	6941593492794	DSE203 M C10 A30	2TAZ261304R2105	0.488	1
					16	6941593492800	DSE203 M C16 A30	2TAZ261304R2165	0.488	1
					20	6941593492817	DSE203 M C20 A30	2TAZ261304R2205	0.488	1
					25	6941593492824	DSE203 M C25 A30	2TAZ261304R2255	0.488	1
					32	6941593492831	DSE203 M C32 A30	2TAZ261304R2325	0.488	1
					40	6941593492848	DSE203 M C40 A30	2TAZ261304R2405	0.488	1
					50	6941593492855	DSE203 M C50 A30	2TAZ261304R2505	0.488	1
					63	6941593492862	DSE203 M C63 A30	2TAZ261304R2635	0.488	1
				D	6	6941593492879	DSE203 M D6 A30	2TAZ261304R2061	0.488	1
					10	6941593492886	DSE203 M D10 A30	2TAZ261304R2101	0.488	1
					16	6941593492893	DSE203 M D16 A30	2TAZ261304R2161	0.488	1
					20	6941593492909	DSE203 M D20 A30	2TAZ261304R2201	0.488	1
					25	6941593492916	DSE203 M D25 A30	2TAZ261304R2251	0.488	1
					32	6941593492923	DSE203 M D32 A30	2TAZ261304R2321	0.488	1
					40	6941593492930	DSE203 M D40 A30	2TAZ261304R2401	0.488	1
					50	6941593492947	DSE203 M D50 A30	2TAZ261304R2501	0.488	1
					63	6941593492954	DSE203 M D63 A30	2TAZ261304R2631	0.488	1

N. Poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
3	10 kA	A	100	B	6	6941593493234	DSE203 M B6 A100	2TAZ261304R3064	0.488	1
					10	6941593493241	DSE203 M B10 A100	2TAZ261304R3104	0.488	1
					16	6941593493258	DSE203 M B16 A100	2TAZ261304R3164	0.488	1
					20	6941593493265	DSE203 M B20 A100	2TAZ261304R3204	0.488	1
					25	6941593493272	DSE203 M B25 A100	2TAZ261304R3254	0.488	1
					32	6941593493289	DSE203 M B32 A100	2TAZ261304R3324	0.488	1
					40	6941593493296	DSE203 M B40 A100	2TAZ261304R3404	0.488	1
					50	6941593493302	DSE203 M B50 A100	2TAZ261304R3504	0.488	1
					63	6941593493319	DSE203 M B63 A100	2TAZ261304R3634	0.488	1
				C	6	6941593493050	DSE203 M C6 A100	2TAZ261304R3065	0.488	1
					10	6941593493067	DSE203 M C10 A100	2TAZ261304R3105	0.488	1
					16	6941593493074	DSE203 M C16 A100	2TAZ261304R3165	0.488	1
					20	6941593493081	DSE203 M C20 A100	2TAZ261304R3205	0.488	1
					25	6941593493098	DSE203 M C25 A100	2TAZ261304R3255	0.488	1
					32	6941593493104	DSE203 M C32 A100	2TAZ261304R3325	0.488	1
					40	6941593493111	DSE203 M C40 A100	2TAZ261304R3405	0.488	1
					50	6941593493128	DSE203 M C50 A100	2TAZ261304R3505	0.488	1
					63	6941593493135	DSE203 M C63 A100	2TAZ261304R3635	0.488	1
				D	6	6941593493142	DSE203 M D6 A100	2TAZ261304R3061	0.488	1
					10	6941593493159	DSE203 M D10 A100	2TAZ261304R3101	0.488	1
					16	6941593493166	DSE203 M D16 A100	2TAZ261304R3161	0.488	1
					20	6941593493173	DSE203 M D20 A100	2TAZ261304R3201	0.488	1
					25	6941593493180	DSE203 M D25 A100	2TAZ261304R3251	0.488	1
					32	6941593493197	DSE203 M D32 A100	2TAZ261304R3321	0.488	1
					40	6941593493203	DSE203 M D40 A100	2TAZ261304R3401	0.488	1
					50	6941593493210	DSE203 M D50 A100	2TAZ261304R3501	0.488	1

N. Poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
3	10 kA	A	300	B	6	6941593493500	DSE203 M B6 A300	2TAZ261304R4064	0.488	1
					10	6941593493517	DSE203 M B10 A300	2TAZ261304R4104	0.488	1
					16	6941593493524	DSE203 M B16 A300	2TAZ261304R4164	0.488	1
					20	6941593493531	DSE203 M B20 A300	2TAZ261304R4204	0.488	1
					25	6941593493548	DSE203 M B25 A300	2TAZ261304R4254	0.488	1
					32	6941593493555	DSE203 M B32 A300	2TAZ261304R4324	0.488	1
					40	6941593493562	DSE203 M B40 A300	2TAZ261304R4404	0.488	1
					50	6941593493579	DSE203 M B50 A300	2TAZ261304R4504	0.488	1
					63	6941593493586	DSE203 M B63 A300	2TAZ261304R4634	0.488	1
				C	6	6941593493326	DSE203 M C6 A300	2TAZ261304R4065	0.488	1
					10	6941593493333	DSE203 M C10 A300	2TAZ261304R4105	0.488	1
					16	6941593493340	DSE203 M C16 A300	2TAZ261304R4165	0.488	1
					20	6941593493357	DSE203 M C20 A300	2TAZ261304R4205	0.488	1
					25	6941593493364	DSE203 M C25 A300	2TAZ261304R4255	0.488	1
					32	6941593493371	DSE203 M C32 A300	2TAZ261304R4325	0.488	1
					40	6941593493388	DSE203 M C40 A300	2TAZ261304R4405	0.488	1
					50	6941593493395	DSE203 M C50 A300	2TAZ261304R4505	0.488	1
					63	6941593493401	DSE203 M C63 A300	2TAZ261304R4635	0.488	1
				D	6	6941593493418	DSE203 M D6 A300	2TAZ261304R4061	0.488	1
					10	6941593493425	DSE203 M D10 A300	2TAZ261304R4101	0.488	1
					16	6941593493432	DSE203 M D16 A300	2TAZ261304R4161	0.488	1
					20	6941593493449	DSE203 M D20 A300	2TAZ261304R4201	0.488	1
					25	6941593493456	DSE203 M D25 A300	2TAZ261304R4251	0.488	1
					32	6941593493463	DSE203 M D32 A300	2TAZ261304R4321	0.488	1
					40	6941593493470	DSE203 M D40 A300	2TAZ261304R4401	0.488	1
					50	6941593493487	DSE203 M D50 A300	2TAZ261304R4501	0.488	1
					63	6941593493494	DSE203 M D63 A300	2TAZ261304R4631	0.488	1

DSE203N M

Ordering data

DSE203N M: 3P+N eRCBO
Function: protection and control of the circuits against overloads and short-circuits; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact ($I_{\Delta n}$ = 30 mA). The neutral is unswitched. Voltage dependent RCBO.

Applications: residential, commercial, industrial
Standard: IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1

N. Poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
3+N	10 kA	A	10	B	6	6941593441662	DSE203N M B6 A10	2TAZ233414R1065	0.549	1
					10	6941593441679	DSE203N M B10 A10	2TAZ233414R1105	0.549	1
					13	6941593441686	DSE203N M B13 A10	2TAZ233414R1135	0.549	1
					16	6941593441693	DSE203N M B16 A10	2TAZ233414R1165	0.549	1
					20	6941593441709	DSE203N M B20 A10	2TAZ233414R1205	0.549	1
					25	6941593441716	DSE203N M B25 A10	2TAZ233414R1255	0.549	1
					32	6941593441723	DSE203N M B32 A10	2TAZ233414R1325	0.549	1
					40	6941593441730	DSE203N M B40 A10	2TAZ233414R1405	0.549	1
					50	6941593441747	DSE203N M B50 A10	2TAZ233414R1505	0.549	1
					63	6941593441754	DSE203N M B63 A10	2TAZ233414R1635	0.549	1
				C	6	6941593441761	DSE203N M C6 A10	2TAZ233414R1064	0.549	1
					10	6941593441778	DSE203N M C10 A10	2TAZ233414R1104	0.549	1
					13	6941593441785	DSE203N M C13 A10	2TAZ233414R1134	0.549	1
					16	6941593441792	DSE203N M C16 A10	2TAZ233414R1164	0.549	1
					20	6941593441808	DSE203N M C20 A10	2TAZ233414R1204	0.549	1
					25	6941593441815	DSE203N M C25 A10	2TAZ233414R1254	0.549	1
					32	6941593441822	DSE203N M C32 A10	2TAZ233414R1324	0.549	1
					40	6941593441839	DSE203N M C40 A10	2TAZ233414R1404	0.549	1
					50	6941593441846	DSE203N M C50 A10	2TAZ233414R1504	0.549	1
					63	6941593441853	DSE203N M C63 A10	2TAZ233414R1634	0.549	1
				D	6	6941593441860	DSE203N M D6 A10	2TAZ233414R1061	0.549	1
					10	6941593441877	DSE203N M D10 A10	2TAZ233414R1101	0.549	1
					13	6941593441884	DSE203N M D13 A10	2TAZ233414R1131	0.549	1
					16	6941593441891	DSE203N M D16 A10	2TAZ233414R1161	0.549	1
					20	6941593441907	DSE203N M D20 A10	2TAZ233414R1201	0.549	1
					25	6941593441914	DSE203N M D25 A10	2TAZ233414R1251	0.549	1
					32	6941593441921	DSE203N M D32 A10	2TAZ233414R1321	0.549	1
					40	6941593441938	DSE203N M D40 A10	2TAZ233414R1401	0.549	1
					50	6941593441945	DSE203N M D50 A10	2TAZ233414R1501	0.549	1
					63	6941593441952	DSE203N M D63 A10	2TAZ233414R1631	0.549	1

N. Poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
3+N	10 kA	A	30	B	6	6941593441969	DSE203N M B6 A30	2TAZ233414R2065	0.549	1
					10	6941593441976	DSE203N M B10 A30	2TAZ233414R2105	0.549	1
					13	6941593441983	DSE203N M B13 A30	2TAZ233414R2135	0.549	1
					16	6941593441990	DSE203N M B16 A30	2TAZ233414R2165	0.549	1
					20	6941593442003	DSE203N M B20 A30	2TAZ233414R2205	0.549	1
					25	6941593442010	DSE203N M B25 A30	2TAZ233414R2255	0.549	1
					32	6941593442027	DSE203N M B32 A30	2TAZ233414R2325	0.549	1
					40	6941593442034	DSE203N M B40 A30	2TAZ233414R2405	0.549	1
					50	6941593442041	DSE203N M B50 A30	2TAZ233414R2505	0.549	1
					63	6941593442058	DSE203N M B63 A30	2TAZ233414R2635	0.549	1
				C	6	6941593442065	DSE203N M C6 A30	2TAZ233414R2064	0.549	1
					10	6941593442072	DSE203N M C10 A30	2TAZ233414R2104	0.549	1
					13	6941593442089	DSE203N M C13 A30	2TAZ233414R2134	0.549	1
					16	6941593442096	DSE203N M C16 A30	2TAZ233414R2164	0.549	1
					20	6941593442102	DSE203N M C20 A30	2TAZ233414R2204	0.549	1
					25	6941593442119	DSE203N M C25 A30	2TAZ233414R2254	0.549	1
					32	6941593442126	DSE203N M C32 A30	2TAZ233414R2324	0.549	1
					40	6941593442133	DSE203N M C40 A30	2TAZ233414R2404	0.549	1
					50	6941593442140	DSE203N M C50 A30	2TAZ233414R2504	0.549	1
					63	6941593442157	DSE203N M C63 A30	2TAZ233414R2634	0.549	1
				D	6	6941593442164	DSE203N M D6 A30	2TAZ233414R2061	0.549	1
					10	6941593442171	DSE203N M D10 A30	2TAZ233414R2101	0.549	1
					13	6941593442188	DSE203N M D13 A30	2TAZ233414R2131	0.549	1
					16	6941593442195	DSE203N M D16 A30	2TAZ233414R2161	0.549	1
					20	6941593442201	DSE203N M D20 A30	2TAZ233414R2201	0.549	1
					25	6941593442218	DSE203N M D25 A30	2TAZ233414R2251	0.549	1
					32	6941593442225	DSE203N M D32 A30	2TAZ233414R2321	0.549	1
					40	6941593442232	DSE203N M D40 A30	2TAZ233414R2401	0.549	1
					50	6941593442249	DSE203N M D50 A30	2TAZ233414R2501	0.549	1
					63	6941593442256	DSE203N M D63 A30	2TAZ233414R2631	0.549	1

N. Poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
3+N	10 kA	A	100	B	6	6941593442263	DSE203N M B6 A100	2TAZ233414R3065	0.549	1
					10	6941593442270	DSE203N M B10 A100	2TAZ233414R3105	0.549	1
					13	6941593442287	DSE203N M B13 A100	2TAZ233414R3135	0.549	1
					16	6941593442294	DSE203N M B16 A100	2TAZ233414R3165	0.549	1
					20	6941593442300	DSE203N M B20 A100	2TAZ233414R3205	0.549	1
					25	6941593442317	DSE203N M B25 A100	2TAZ233414R3255	0.549	1
					32	6941593442324	DSE203N M B32 A100	2TAZ233414R3325	0.549	1
					40	6941593442331	DSE203N M B40 A100	2TAZ233414R3405	0.549	1
					50	6941593442348	DSE203N M B50 A100	2TAZ233414R3505	0.549	1
					63	6941593442355	DSE203N M B63 A100	2TAZ233414R3635	0.549	1
				C	6	6941593442362	DSE203N M C6 A100	2TAZ233414R3064	0.549	1
					10	6941593442379	DSE203N M C10 A100	2TAZ233414R3104	0.549	1
					13	6941593442386	DSE203N M C13 A100	2TAZ233414R3134	0.549	1
					16	6941593442393	DSE203N M C16 A100	2TAZ233414R3164	0.549	1
					20	6941593442409	DSE203N M C20 A100	2TAZ233414R3204	0.549	1
					25	6941593442416	DSE203N M C25 A100	2TAZ233414R3254	0.549	1
					32	6941593442423	DSE203N M C32 A100	2TAZ233414R3324	0.549	1
					40	6941593442430	DSE203N M C40 A100	2TAZ233414R3404	0.549	1
					50	6941593442447	DSE203N M C50 A100	2TAZ233414R3504	0.549	1
					63	6941593442454	DSE203N M C63 A100	2TAZ233414R3634	0.549	1
				D	6	6941593442461	DSE203N M D6 A100	2TAZ233414R3061	0.549	1
					10	6941593442478	DSE203N M D10 A100	2TAZ233414R3101	0.549	1
					13	6941593442485	DSE203N M D13 A100	2TAZ233414R3131	0.549	1
					16	6941593442492	DSE203N M D16 A100	2TAZ233414R3161	0.549	1
					20	6941593442508	DSE203N M D20 A100	2TAZ233414R3201	0.549	1
					25	6941593442515	DSE203N M D25 A100	2TAZ233414R3251	0.549	1
					32	6941593442522	DSE203N M D32 A100	2TAZ233414R3321	0.549	1
					40	6941593442539	DSE203N M D40 A100	2TAZ233414R3401	0.549	1
					50	6941593442546	DSE203N M D50 A100	2TAZ233414R3501	0.549	1
					63	6941593442553	DSE203N M D63 A100	2TAZ233414R3631	0.549	1

N. Poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
3+N	10 kA	A	300	B	6	6941593442560	DSE203N M B6 A300	2TAZ233414R4065	0.549	1
					10	6941593442577	DSE203N M B10 A300	2TAZ233414R4105	0.549	1
					13	6941593442584	DSE203N M B13 A300	2TAZ233414R4135	0.549	1
					16	6941593442591	DSE203N M B16 A300	2TAZ233414R4165	0.549	1
					20	6941593442607	DSE203N M B20 A300	2TAZ233414R4205	0.549	1
					25	6941593442614	DSE203N M B25 A300	2TAZ233414R4255	0.549	1
					32	6941593442621	DSE203N M B32 A300	2TAZ233414R4325	0.549	1
					40	6941593442638	DSE203N M B40 A300	2TAZ233414R4405	0.549	1
					50	6941593442645	DSE203N M B50 A300	2TAZ233414R4505	0.549	1
					63	6941593442652	DSE203N M B63 A300	2TAZ233414R4635	0.549	1
				C	6	6941593442669	DSE203N M C6 A300	2TAZ233414R4064	0.549	1
					10	6941593442676	DSE203N M C10 A300	2TAZ233414R4104	0.549	1
					13	6941593442683	DSE203N M C13 A300	2TAZ233414R4134	0.549	1
					16	6941593442690	DSE203N M C16 A300	2TAZ233414R4164	0.549	1
					20	6941593442706	DSE203N M C20 A300	2TAZ233414R4204	0.549	1
					25	6941593442713	DSE203N M C25 A300	2TAZ233414R4254	0.549	1
					32	6941593442720	DSE203N M C32 A300	2TAZ233414R4324	0.549	1
					40	6941593442737	DSE203N M C40 A300	2TAZ233414R4404	0.549	1
					50	6941593442744	DSE203N M C50 A300	2TAZ233414R4504	0.549	1
					63	6941593442751	DSE203N M C63 A300	2TAZ233414R4634	0.549	1
				D	6	6941593442768	DSE203N M D6 A300	2TAZ233414R4061	0.549	1
					10	6941593442775	DSE203N M D10 A300	2TAZ233414R4101	0.549	1
					13	6941593442782	DSE203N M D13 A300	2TAZ233414R4131	0.549	1
					16	6941593442799	DSE203N M D16 A300	2TAZ233414R4161	0.549	1
					20	6941593442805	DSE203N M D20 A300	2TAZ233414R4201	0.549	1
					25	6941593442812	DSE203N M D25 A300	2TAZ233414R4251	0.549	1
					32	6941593442829	DSE203N M D32 A300	2TAZ233414R4321	0.549	1
					40	6941593442836	DSE203N M D40 A300	2TAZ233414R4401	0.549	1
					50	6941593442843	DSE203N M D50 A300	2TAZ233414R4501	0.549	1
					63	6941593442850	DSE203N M D63 A300	2TAZ233414R4631	0.549	1

DSE203NS M

Ordering data

DSE203NS M: 3P+Nsw eRCBO
Function: protection and control of the circuits against overloads and short-circuits; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA). Integrated with auxiliary contact. The neutral is switched. Voltage dependent RCBO.

Applications: residential, commercial, industrial
Standard: IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1

N. Poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
3P+Nsw	10 kA	A	30	B	6	6941593493777	DSE203NS M B6 A30	2TAZ262414R2064	0.637	1
					10	6941593493784	DSE203NS M B10 A30	2TAZ262414R2104	0.637	1
					16	6941593493791	DSE203NS M B16 A30	2TAZ262414R2164	0.637	1
					20	6941593493807	DSE203NS M B20 A30	2TAZ262414R2204	0.637	1
					25	6941593493814	DSE203NS M B25 A30	2TAZ262414R2254	0.637	1
					32	6941593493821	DSE203NS M B32 A30	2TAZ262414R2324	0.637	1
					40	6941593493838	DSE203NS M B40 A30	2TAZ262414R2404	0.637	1
					50	6941593493845	DSE203NS M B50 A30	2TAZ262414R2504	0.637	1
					63	6941593493852	DSE203NS M B63 A30	2TAZ262414R2634	0.637	1
				C	6	6941593493593	DSE203NS M C6 A30	2TAZ262414R2065	0.637	1
					10	6941593493609	DSE203NS M C10 A30	2TAZ262414R2105	0.637	1
					16	6941593493616	DSE203NS M C16 A30	2TAZ262414R2165	0.637	1
					20	6941593493623	DSE203NS M C20 A30	2TAZ262414R2205	0.637	1
					25	6941593493630	DSE203NS M C25 A30	2TAZ262414R2255	0.637	1
					32	6941593493647	DSE203NS M C32 A30	2TAZ262414R2325	0.637	1
					40	6941593493654	DSE203NS M C40 A30	2TAZ262414R2405	0.637	1
					50	6941593493661	DSE203NS M C50 A30	2TAZ262414R2505	0.637	1
					63	6941593493678	DSE203NS M C63 A30	2TAZ262414R2635	0.637	1
				D	6	6941593493685	DSE203NS M D6 A30	2TAZ262414R2061	0.637	1
					10	6941593493692	DSE203NS M D10 A30	2TAZ262414R2101	0.637	1
					16	6941593493708	DSE203NS M D16 A30	2TAZ262414R2161	0.637	1
					20	6941593493715	DSE203NS M D20 A30	2TAZ262414R2201	0.637	1
					25	6941593493722	DSE203NS M D25 A30	2TAZ262414R2251	0.637	1
					32	6941593493739	DSE203NS M D32 A30	2TAZ262414R2321	0.637	1
					40	6941593493746	DSE203NS M D40 A30	2TAZ262414R2401	0.637	1
					50	6941593493753	DSE203NS M D50 A30	2TAZ262414R2501	0.637	1
					63	6941593493760	DSE203NS M D63 A30	2TAZ262414R2631	0.637	1

N. Poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
3P+Nsw	10 kA	A	100	B	6	6941593494040	DSE203NS M B6 A100	2TAZ262414R3064	0.637	1
					10	6941593494057	DSE203NS M B10 A100	2TAZ262414R3104	0.637	1
					16	6941593494064	DSE203NS M B16 A100	2TAZ262414R3164	0.637	1
					20	6941593494071	DSE203NS M B20 A100	2TAZ262414R3204	0.637	1
					25	6941593494088	DSE203NS M B25 A100	2TAZ262414R3254	0.637	1
					32	6941593494095	DSE203NS M B32 A100	2TAZ262414R3324	0.637	1
					40	6941593494101	DSE203NS M B40 A100	2TAZ262414R3404	0.637	1
					50	6941593494118	DSE203NS M B50 A100	2TAZ262414R3504	0.637	1
					63	6941593494125	DSE203NS M B63 A100	2TAZ262414R3634	0.637	1
				C	6	6941593493869	DSE203NS M C6 A100	2TAZ262414R3065	0.637	1
					10	6941593493876	DSE203NS M C10 A100	2TAZ262414R3105	0.637	1
					16	6941593493883	DSE203NS M C16 A100	2TAZ262414R3165	0.637	1
					20	6941593493890	DSE203NS M C20 A100	2TAZ262414R3205	0.637	1
					25	6941593493906	DSE203NS M C25 A100	2TAZ262414R3255	0.637	1
					32	6941593493913	DSE203NS M C32 A100	2TAZ262414R3325	0.637	1
					40	6941593493920	DSE203NS M C40 A100	2TAZ262414R3405	0.637	1
					50	6941593493937	DSE203NS M C50 A100	2TAZ262414R3505	0.637	1
					63	6941593493944	DSE203NS M C63 A100	2TAZ262414R3635	0.637	1
				D	6	6941593493951	DSE203NS M D6 A100	2TAZ262414R3061	0.637	1
					10	6941593493968	DSE203NS M D10 A100	2TAZ262414R3101	0.637	1
					16	6941593493975	DSE203NS M D16 A100	2TAZ262414R3161	0.637	1
					20	6941593493982	DSE203NS M D20 A100	2TAZ262414R3201	0.637	1
					25	6941593493999	DSE203NS M D25 A100	2TAZ262414R3251	0.637	1
					32	6941593494002	DSE203NS M D32 A100	2TAZ262414R3321	0.637	1
					40	6941593494019	DSE203NS M D40 A100	2TAZ262414R3401	0.637	1
					50	6941593494026	DSE203NS M D50 A100	2TAZ262414R3501	0.637	1
					63	6941593494033	DSE203NS M D63 A100	2TAZ262414R3631	0.637	1

N. Poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
3P+Nsw	10 kA	A	300	B	6	6941593494316	DSE203NS M B6 A300	2TAZ262414R4064	0.637	1
					10	6941593494323	DSE203NS M B10 A300	2TAZ262414R4104	0.637	1
					16	6941593494330	DSE203NS M B16 A300	2TAZ262414R4164	0.637	1
					20	6941593494347	DSE203NS M B20 A300	2TAZ262414R4204	0.637	1
					25	6941593494354	DSE203NS M B25 A300	2TAZ262414R4254	0.637	1
					32	6941593494361	DSE203NS M B32 A300	2TAZ262414R4324	0.637	1
					40	6941593494378	DSE203NS M B40 A300	2TAZ262414R4404	0.637	1
					50	6941593494385	DSE203NS M B50 A300	2TAZ262414R4504	0.637	1
					63	6941593494392	DSE203NS M B63 A300	2TAZ262414R4634	0.637	1
				C	6	6941593494132	DSE203NS M C6 A300	2TAZ262414R4065	0.637	1
					10	6941593494149	DSE203NS M C10 A300	2TAZ262414R4105	0.637	1
					16	6941593494156	DSE203NS M C16 A300	2TAZ262414R4165	0.637	1
					20	6941593494163	DSE203NS M C20 A300	2TAZ262414R4205	0.637	1
					25	6941593494170	DSE203NS M C25 A300	2TAZ262414R4255	0.637	1
					32	6941593494187	DSE203NS M C32 A300	2TAZ262414R4325	0.637	1
					40	6941593494194	DSE203NS M C40 A300	2TAZ262414R4405	0.637	1
					50	6941593494200	DSE203NS M C50 A300	2TAZ262414R4505	0.637	1
					63	6941593494217	DSE203NS M C63 A300	2TAZ262414R4635	0.637	1
				D	6	6941593494224	DSE203NS M D6 A300	2TAZ262414R4061	0.637	1
					10	6941593494231	DSE203NS M D10 A300	2TAZ262414R4101	0.637	1
					16	6941593494248	DSE203NS M D16 A300	2TAZ262414R4161	0.637	1
					20	6941593494255	DSE203NS M D20 A300	2TAZ262414R4201	0.637	1
					25	6941593494262	DSE203NS M D25 A300	2TAZ262414R4251	0.637	1
					32	6941593494279	DSE203NS M D32 A300	2TAZ262414R4321	0.637	1
					40	6941593494286	DSE203NS M D40 A300	2TAZ262414R4401	0.637	1
					50	6941593494293	DSE203NS M D50 A300	2TAZ262414R4501	0.637	1
					63	6941593494309	DSE203NS M D63 A300	2TAZ262414R4631	0.637	1

DSN201E
Product at a glance

High performance clips
To facilitate the mounting and dismounting operation, guaranteeing an easy removal from a battery of device supplied with busbars.

Technical information
Main technical information are printed on the front side, visible also when the device is installed.

QR code on the front side
Redirecting to ABB product page for a quick access to all product information.

Easy supply
Supply possible from top and bottom side, either with cables or busbars. The neutral is switched

Combination with accessories
Possibility to mount signal and auxiliary contacts of DSCC series on right side.

Guaranteed security
Indication of the contacts status with I-0N/0-FF indication in green/red on the toggle.

DSN201E

Technical features

			DSN201E / DSN201E M
Standards			IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1
Electrical features			
Type (wave form of the earth leakage sensed)			AC, A
Number of poles			1P+N
Rated sensitivity $I_{\Delta n}$		mA	10, 30
Rated current I_n		A	$6 \le I_n \le 32$ (up to 20A for M version)
Rated operational voltage U_e		V	230/240
Rated Insulation voltage U_i acc. to IEC/EN 60664-1		V	500 V AC/DC
Overvoltage category			III
Pollution degree			2
Rated frequency f		Hz	50/60
Min. operating voltage for protection against $I_{\Delta n}$ residual sinusoidal alternating currents		V	85
Max operating voltage		V	264
Operating voltage of circuit test		V	160–264
Rated short circuit breaking capacity acc. to IEC/EN 61009-1	I_{cn}	A	6 000 / 10 000
Rated residual breaking capacity $I_{\Delta m}$ to IEC 61009-1	$I_{\Delta m}$	A	3 000
Rated short circuit breaking capacity acc. to IEC/EN 60947-2 (only referring to short circuit test)	Ultimate Icu	kA	6; 10
	Service Ics	kA	6
Grid distance		mm	45
Rated impulse withstand voltage U_{imp}. (1.2/50µs)		kV	4
Dielectric test voltage at ind. freq. for 1 min.		kV	2.5 kV (50 / 60Hz)
Tripping characteristic	B: $3\ I_n \le I_m \le 5\ I_n$		■
	C: $5\ I_n \le I_m \le 10\ I_n$		■
Energy limiting class			3
Mechanical features			
Hosing type			Insulation group I
Toggle type			Insulation group II
Contact position indication (CPI)			Green/red indication on toggle
Electrical endurance		Cycles (OFF-ON-OFF)	10000
Mechanical endurance		Cycles (OFF-ON-OFF)	20000
Protection degree acc. to EN 60529	housing		IP40
	terminals		IP20
Resistance to Shock acc. to IEC 60068-2-27			40g (x,y,z) - 18 shocks - 5ms half sinusoidal
Resistance to Vibrations acc. to IEC 60068-2-6			1.5 g, 30 min, 0...80 Hz
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55 °C/90–96 % and 25 °C/95–100 %
Reference temperature for tripping characteristics		°C	30
Ambient temperature (with daily average ≤ +35 °C)		°C	-25....+55
Storage temperature		°C	-25...+70
Installation			
Terminal type	top / bottom		Fail-safe cage terminals
Cross-section of conductors	top / bottom	mm^2	16/16 flexible; 25/25 rigid
Cross-section of busbars	top / bottom	mm^2	10/10
Tightening torque	top / bottom	Nm	1.2/1.2
Wire Stripping Length		mm	13
Screwdriver			No. 2 Pozidrive
Mounting Type			on DIN rail EN 60715 (35 mm) by means of mounting clip
Mounting position			Vertical & Horizontal
Supply from			Top and Botom terminals
Dimensions and weight			
Dimensions (H×D×W)		mm	86×70×17.8
Weight		g	119
Combinationwithauxiliary elements			
Combinable with accessories and auxiliaries			YES, DSCC series

DSN201E

Ordering data

DSN201E: 1P+N eRCBO
Function: protection and control of the circuits against overloads and short-circuits; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact ($I_{\Delta n}$ = 30 mA). The neutral is switched. Voltage dependent RCBO.
Applications: residential, commercial, industrial
Standard: IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1

N. poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details Type code	Order details Order code	Weight 1 piece kg	Pack unit pc.
1P+N	6 kA	AC	30 mA	C	6	6941593498123	DSN201E C6 AC30	2TAZ264111R2064	0.119	1
					10	6941593498130	DSN201E C10 AC30	2TAZ264111R2104	0.119	1
					13	6941593498147	DSN201E C13 AC30	2TAZ264111R2134	0.119	1
					16	6941593498154	DSN201E C16 AC30	2TAZ264111R2164	0.119	1
					20	6941593498161	DSN201E C20 AC30	2TAZ264111R2204	0.119	1
					25	6941593498178	DSN201E C25 AC30	2TAZ264111R2254	0.119	1
					32	6941593498185	DSN201E C32 AC30	2TAZ264111R2324	0.119	1
				B	6	6941593498192	DSN201E B6 AC30	2TAZ264111R2061	0.119	1
					10	6941593498208	DSN201E B10 AC30	2TAZ264111R2101	0.119	1
					13	6941593498215	DSN201E B13 AC30	2TAZ264111R2131	0.119	1
					16	6941593498222	DSN201E B16 AC30	2TAZ264111R2161	0.119	1
					20	6941593498239	DSN201E B20 AC30	2TAZ264111R2201	0.119	1
					25	6941593498246	DSN201E B25 AC30	2TAZ264111R2251	0.119	1
					32	6941593498253	DSN201E B32 AC30	2TAZ264111R2321	0.119	1
		A	10 mA	C	6	6941593498260	DSN201E C6 A10	2TAZ264114R1064	0.119	1
					10	6941593498277	DSN201E C10 A10	2TAZ264114R1104	0.119	1
					13	6941593498284	DSN201E C13 A10	2TAZ264114R1134	0.119	1
					16	6941593498291	DSN201E C16 A10	2TAZ264114R1164	0.119	1
					20	6941593498307	DSN201E C20 A10	2TAZ264114R1204	0.119	1
					25	6941593498314	DSN201E C25 A10	2TAZ264114R1254	0.119	1
					32	6941593498321	DSN201E C32 A10	2TAZ264114R1324	0.119	1
				B	6	6941593498338	DSN201E B6 A10	2TAZ264114R1061	0.119	1
					10	6941593498345	DSN201E B10 A10	2TAZ264114R1101	0.119	1
					13	6941593498352	DSN201E B13 A10	2TAZ264114R1131	0.119	1
					16	6941593498369	DSN201E B16 A10	2TAZ264114R1161	0.119	1
					20	6941593498376	DSN201E B20 A10	2TAZ264114R1201	0.119	1
					25	6941593498383	DSN201E B25 A10	2TAZ264114R1251	0.119	1
					32	6941593498390	DSN201E B32 A10	2TAZ264114R1321	0.119	1
			30 mA	C	6	6941593498406	DSN201E C6 A30	2TAZ264114R2064	0.119	1
					10	6941593498413	DSN201E C10 A30	2TAZ264114R2104	0.119	1
					13	6941593498420	DSN201E C13 A30	2TAZ264114R2134	0.119	1
					16	6941593498437	DSN201E C16 A30	2TAZ264114R2164	0.119	1
					20	6941593498444	DSN201E C20 A30	2TAZ264114R2204	0.119	1
					25	6941593498451	DSN201E C25 A30	2TAZ264114R2254	0.119	1
					32	6941593498468	DSN201E C32 A30	2TAZ264114R2324	0.119	1
				B	6	6941593498475	DSN201E B6 A30	2TAZ264114R2061	0.119	1
					10	6941593498482	DSN201E B10 A30	2TAZ264114R2101	0.119	1
					13	6941593498499	DSN201E B13 A30	2TAZ264114R2131	0.119	1
					16	6941593498505	DSN201E B16 A30	2TAZ264114R2161	0.119	1
					20	6941593498512	DSN201E B20 A30	2TAZ264114R2201	0.119	1
					25	6941593498529	DSN201E B25 A30	2TAZ264114R2251	0.119	1
					32	6941593498536	DSN201E B32 A30	2TAZ264114R2321	0.119	1

DSN201E

Ordering data

N. poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details Type code	Order details Order code	Weight 1 piece kg	Pack unit pc.
1P+N	10 kA	A	10 mA	C	6	6941593498543	DSN201E M C6 A10	2TAZ265114R1064	0.119	1
					10	6941593498550	DSN201E M C10 A10	2TAZ265114R1104	0.119	1
					13	6941593498567	DSN201E M C13 A10	2TAZ265114R1134	0.119	1
					16	6941593498574	DSN201E M C16 A10	2TAZ265114R1164	0.119	1
					20	6941593498581	DSN201E M C20 A10	2TAZ265114R1204	0.119	1
				B	6	6941593498598	DSN201E M B6 A10	2TAZ265114R1061	0.119	1
					10	6941593498604	DSN201E M B10 A10	2TAZ265114R1101	0.119	1
					13	6941593498611	DSN201E M B13 A10	2TAZ265114R1131	0.119	1
					16	6941593498628	DSN201E M B16 A10	2TAZ265114R1161	0.119	1
					20	6941593498635	DSN201E M B20 A10	2TAZ265114R1201	0.119	1
			30 mA	C	6	6941593498642	DSN201E M C6 A30	2TAZ265114R2064	0.119	1
					10	6941593498659	DSN201E M C10 A30	2TAZ265114R2104	0.119	1
					13	6941593498666	DSN201E M C13 A30	2TAZ265114R2134	0.119	1
					16	6941593498673	DSN201E M C16 A30	2TAZ265114R2164	0.119	1
					20	6941593498680	DSN201E M C20 A30	2TAZ265114R2204	0.119	1
				B	6	6941593498697	DSN201E M B6 A30	2TAZ265114R2061	0.119	1
					10	6941593498703	DSN201E M B10 A30	2TAZ265114R2101	0.119	1
					13	6941593498710	DSN201E M B13 A30	2TAZ265114R2131	0.119	1
					16	6941593498727	DSN201E M B16 A30	2TAZ265114R2161	0.119	1
					20	6941593498734	DSN201E M B20 A30	2TAZ265114R2201	0.119	1

DSE201 NS
Product at a glance

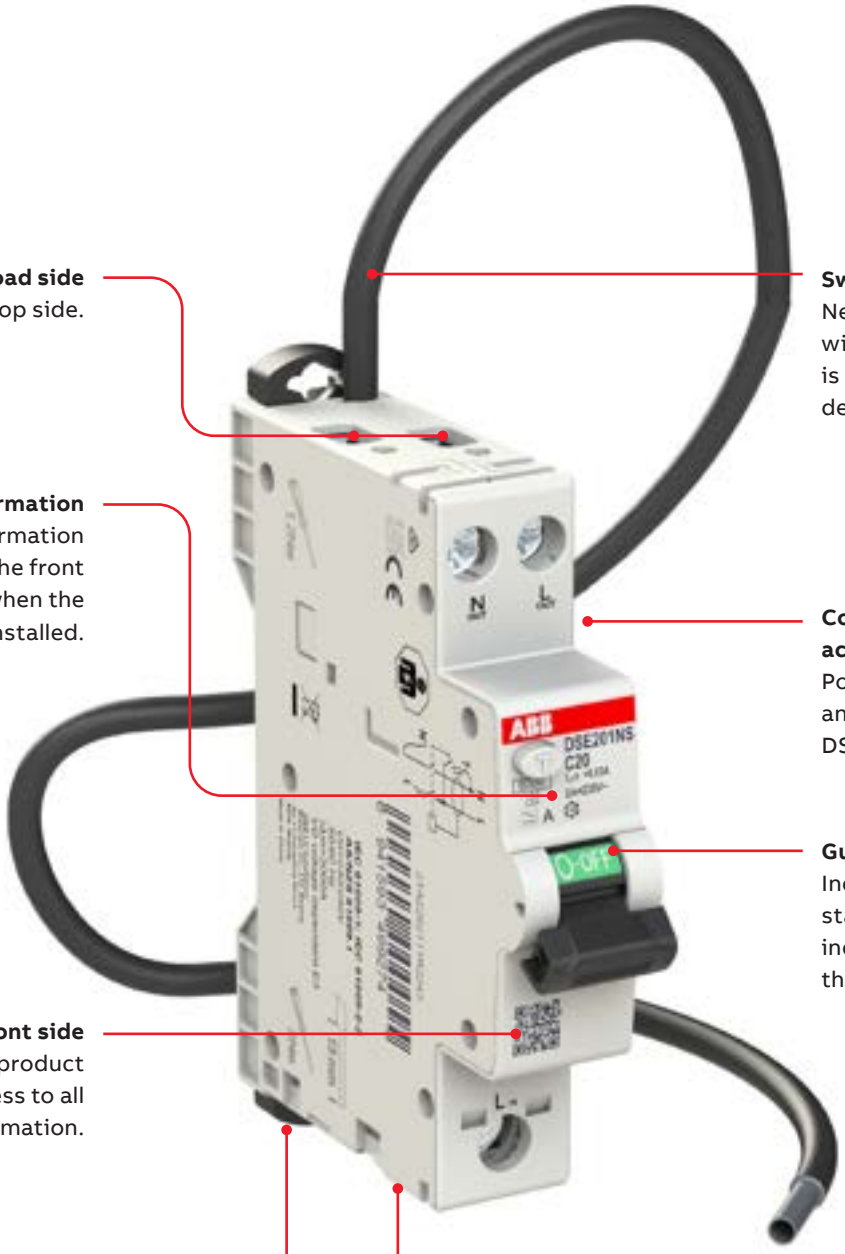

Load side
Load from the top side.

Technical information
Main technical information are printed on the front side, visible also when the device is installed.

QR code on the front side
Redirecting to ABB product page for a quick access to all product information.

High performance clips
To facilitate the mounting and dismounting operation, guaranteeing an easy removal from a battery of device supplied with busbars.

Switched neutral
Neutral supply from the top with solid cable. The neutral is Switched, adding to the device additional protection.

Combination with accessories
Possibility to mount signal and auxiliary contacts of DSCC series on right side.

Guaranteed security
Indication of the contacts status with I-0N/0-FF indication in green/red on the toggle.

Supply side
Phase supply from the bottom for easy installation in chassis distribution boards.

DSE201 NS

Technical features

			DSE201 NS / DSE201 M NS
Standards			IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1
Electrical features			
Type (wave form of the earth leakage sensed)			AC, A
Number of poles			1P+N
Rated sensitivity $I_{\Delta n}$		mA	10, 30
Rated current I_n		A	$6 \le I_n \le 32$ (up to 20 A for M version)
Rated operational voltage U_e		V	230/240
Rated Insulation voltage U_i acc. to IEC/EN 60664-1		V	500 V AC/DC
Overvoltage category			III
Pollution degree			2
Rated frequency f		Hz	50/60
Min. operating voltage for protection against $I_{\Delta n}$ residual sinusoidal alternating currents		V	85
Max operating voltage		V	264
Operating voltage of circuit test		V	160–264
Rated short circuit breaking capacity acc. to IEC/EN 61009-1	I_{cn}	A	6 000 / 10 000
Rated residual breaking capacity $I_{\Delta m}$ to IEC 61009-1	$I_{\Delta m}$	A	3 000
Rated short circuit breaking capacity acc. to IEC/EN 60947-2 (only referring to short circuit test)	Ultimate Icu	kA	6; 10
	Service Ics	kA	6
Grid distance		mm	45
Rated impulse withstand voltage U_{imp}. (1.2/50µs)		kV	4
Dielectric test voltage at ind. freq. for 1 min.		kV	2.5 kV (50 / 60Hz)
Tripping characteristic	B: $3\ I_n \le I_m \le 5\ I_n$		■
	C: $5\ I_n \le I_m \le 10\ I_n$		■
Energy limiting class			3
Mechanical features			
Housing Type			Insulation group I
Toggle Type			Insulation group II
Contact position indication (CPI)			Green/red indication on toggle
Electrical endurance		cycles (OFF-ON-OFF)	10000
Mechanical endurance		cycles (OFF-ON-OFF)	20000
Protection degree acc. to EN 60529	housing		IP40
	terminals		IP20
Resistance to Shock acc. to IEC 60068-2-27			40g (x,y,z) - 18 shocks - 5ms half sinusoidal
Resistance to Vibrations acc. to IEC 60068-2-6			1.5g, 30 min, 0…80Hz
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/RH	28 cycles with 55 °C/90–96 % and 25 °C/95–100 %
Reference temperature for tripping characteristics		°C	30
Ambient temperature (with daily average ≤ +35 °C)		°C	-25...+55°C
Storage temperature		°C	-25...+70
Installation			
Terminal type	top / bottom		Fail-safe cage terminals
Cross-section of conductors	top / bottom	mm^2	16/25 flexible; 25/35 rigid
Cross-section of busbars	top / bottom	mm^2	10/10
Tightening torque	top / bottom	Nm	1.2/2
Wire Stripping Length		mm	13
Screwdriver			No. 2 Pozidrive
Neutral cable	Length	mm	750
	Section	mm^2	4 mm^2 up to 25 A, 6 mm^2 to 32 A
	Color	Black	
Mounting Type			on DIN rail EN 60715 (35 mm) by means of mounting clip
Mounting position			Vertical & Horizontal
Supply from			Bottom terminals
Dimensions and weight			
Dimensions (H×D×W)		mm	86×70×17.8
Weight		g	166
Combinationwithauxiliary elements			
Combinable with accessories and auxiliaries			YES, DSCC series

DSE201 NS

Ordering data

DSE201 NS: 1P+N eRCBO
Function: protection and control of the circuits against overloads and short-circuits; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact ($I_{\Delta n}$ = 30 mA). The neutral is switched. Voltage dependent RCBO.
Applications: Residential, commercial, industrial
Standard: IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1

N. poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
1P+N	6 kA	AC	30	B	6	6941593499168	DSE201 B6 AC30 NS	2TAZ262111R2061	0.166	1
					10	6941593499175	DSE201 B10 AC30 NS	2TAZ262111R2101	0.166	1
					13	6941593499182	DSE201 B13 AC30 NS	2TAZ262111R2131	0.166	1
					16	6941593499199	DSE201 B16 AC30 NS	2TAZ262111R2161	0.166	1
					20	6941593499205	DSE201 B20 AC30 NS	2TAZ262111R2201	0.166	1
					25	6941593499212	DSE201 B25 AC30 NS	2TAZ262111R2251	0.166	1
					32	6941593499229	DSE201 B32 AC30 NS	2TAZ262111R2321	0.166	1
				C	6	6941593499236	DSE201 C6 AC30 NS	2TAZ262111R2064	0.166	1
					10	6941593499243	DSE201 C10 AC30 NS	2TAZ262111R2104	0.166	1
					13	6941593499250	DSE201 C13 AC30 NS	2TAZ262111R2134	0.166	1
					16	6941593499267	DSE201 C16 AC30 NS	2TAZ262111R2164	0.166	1
					20	6941593499274	DSE201 C20 AC30 NS	2TAZ262111R2204	0.166	1
					25	6941593499281	DSE201 C25 AC30 NS	2TAZ262111R2254	0.166	1
					32	6941593499298	DSE201 C32 AC30 NS	2TAZ262111R2324	0.166	1
		A	10	B	6	6941593499304	DSE201 B6 A10 NS	2TAZ262114R1061	0.166	1
					10	6941593499311	DSE201 B10 A10 NS	2TAZ262114R1101	0.166	1
					13	6941593499328	DSE201 B13 A10 NS	2TAZ262114R1131	0.166	1
					16	6941593499335	DSE201 B16 A10 NS	2TAZ262114R1161	0.166	1
					20	6941593499342	DSE201 B20 A10 NS	2TAZ262114R1201	0.166	1
					25	6941593499359	DSE201 B25 A10 NS	2TAZ262114R1251	0.166	1
					32	6941593499366	DSE201 B32 A10 NS	2TAZ262114R1321	0.166	1
				C	6	6941593499373	DSE201 C6 A10 NS	2TAZ262114R1064	0.166	1
					10	6941593499380	DSE201 C10 A10 NS	2TAZ262114R1104	0.166	1
					13	6941593499397	DSE201 C13 A10 NS	2TAZ262114R1134	0.166	1
					16	6941593499403	DSE201 C16 A10 NS	2TAZ262114R1164	0.166	1
					20	6941593499410	DSE201 C20 A10 NS	2TAZ262114R1204	0.166	1
					25	6941593499427	DSE201 C25 A10 NS	2TAZ262114R1254	0.166	1
					32	6941593499434	DSE201 C32 A10 NS	2TAZ262114R1324	0.166	1
			30	B	6	6941593499441	DSE201 B6 A30 NS	2TAZ262114R2061	0.166	1
					10	6941593499458	DSE201 B10 A30 NS	2TAZ262114R2101	0.166	1
					13	6941593499465	DSE201 B13 A30 NS	2TAZ262114R2131	0.166	1
					16	6941593499472	DSE201 B16 A30 NS	2TAZ262114R2161	0.166	1
					20	6941593499489	DSE201 B20 A30 NS	2TAZ262114R2201	0.166	1
					25	6941593499496	DSE201 B25 A30 NS	2TAZ262114R2251	0.166	1
					32	6941593499502	DSE201 B32 A30 NS	2TAZ262114R2321	0.166	1
				C	6	6941593499519	DSE201 C6 A30 NS	2TAZ262114R2064	0.166	1
					10	6941593499526	DSE201 C10 A30 NS	2TAZ262114R2104	0.166	1
					13	6941593499533	DSE201 C13 A30 NS	2TAZ262114R2134	0.166	1
					16	6941593499540	DSE201 C16 A30 NS	2TAZ262114R2164	0.166	1
					20	6941593499557	DSE201 C20 A30 NS	2TAZ262114R2204	0.166	1
					25	6941593499564	DSE201 C25 A30 NS	2TAZ262114R2254	0.166	1
					32	6941593499571	DSE201 C32 A30 NS	2TAZ262114R2324	0.166	1

DSE201 NS

Ordering data

N. poles	Breaking capacity	Type	Sensitivity $I_{\Delta n}$ mA	Tripping Char.	Rated Current I_n A	EAN	Order details		Weight 1 piece kg	Pack unit pc.
							Type code	Order code		
1P+N	10 kA	A	10	B	6	6941593499588	DSE201 M B6 A10 NS	2TAZ263114R1061	0.166	1
					10	6941593499595	DSE201 M B10 A10 NS	2TAZ263114R1101	0.166	1
					13	6925897500003	DSE201 M B13 A10 NS	2TAZ263114R1131	0.166	1
					16	6925897500010	DSE201 M B16 A10 NS	2TAZ263114R1161	0.166	1
					20	6925897500027	DSE201 M B20 A10 NS	2TAZ263114R1201	0.166	1
				C	6	6925897500034	DSE201 M C6 A10 NS	2TAZ263114R1064	0.166	1
					10	6925897500041	DSE201 M C10 A10 NS	2TAZ263114R1104	0.166	1
					13	6925897500058	DSE201 M C13 A10 NS	2TAZ263114R1134	0.166	1
					16	6925897500065	DSE201 M C16 A10 NS	2TAZ263114R1164	0.166	1
					20	6925897500072	DSE201 M C20 A10 NS	2TAZ263114R1204	0.166	1
			30	B	6	6925897500089	DSE201 M B6 A30 NS	2TAZ263114R2061	0.166	1
					10	6925897500096	DSE201 M B10 A30 NS	2TAZ263114R2101	0.166	1
					13	6925897500102	DSE201 M B13 A30 NS	2TAZ263114R2131	0.166	1
					16	6925897500119	DSE201 M B16 A30 NS	2TAZ263114R2161	0.166	1
					20	6925897500126	DSE201 M B20 A30 NS	2TAZ263114R2201	0.166	1
				C	6	6925897500133	DSE201 M C6 A30 NS	2TAZ263114R2064	0.166	1
					10	6925897500140	DSE201 M C10 A30 NS	2TAZ263114R2104	0.166	1
					13	6925897500157	DSE201 M C13 A30 NS	2TAZ263114R2134	0.166	1
					16	6925897500164	DSE201 M C16 A30 NS	2TAZ263114R2164	0.166	1
					20	6925897500171	DSE201 M C20 A30 NS	2TAZ263114R2204	0.166	1

Residual Current Relays

Monitoring and protection of the low voltage distribution network

RD Series

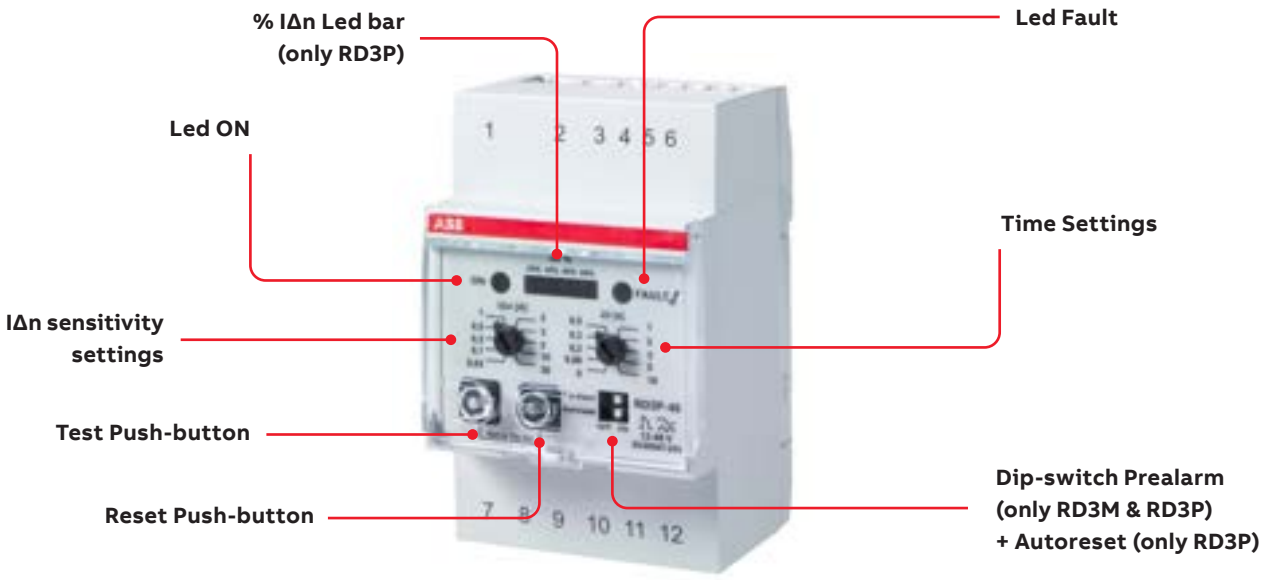

ELR Series

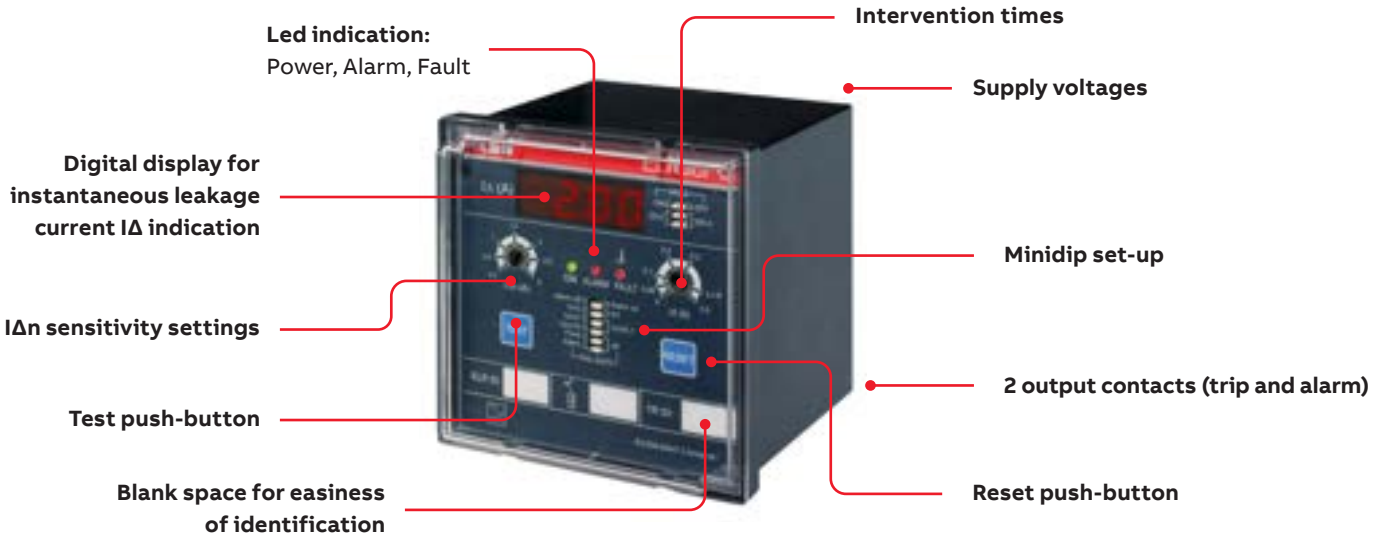

Toroidal Transformers

A wide range of toroids to be used in combination with ELR/RD series.

Residual current relays

RD2

RD2

Technical features		
Operating voltage	[V]	230÷400 a.c. (RD2) and 48÷150 a.c./d.c. (RD2-48)
Frequency	[Hz]	50÷60
Type		A
Operating temperature	[°C]	-5...+40
Power consumption	[W]	<3.4, 230 V a.c.
Sensitivity settings IΔn	[A]	0.03; 0.1; 0.3; 0.5; 1; 2
Tripping time settings	[s]	Fast (instantaneous); 0.3; 0.5; 1; 2; 5
Contact capacity	[A]	10 at 250 V a.c. (ohmic)
Contact type		NC-C-NO
Modules	[No.]	2
Protection degree		IP20
Standards		IEC/EN 62020

RD2 residual current relays

Residual current relays with external toroidal transformer can detect leakage currents. Through minidip it is possible to set sensitivity and intervention time. RD2 residual current relays are designed to be used with external toroid belonging to TR family – see the dedicated section in page 2/153.

Operating voltage	**Bbn 8012542**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
[V]	**EAN**	**Type code**	**Order code**		**[kg]**	**pc.**
230...400 a.c.	058007	RD2	2CSM142120R1201		0.125	1
48...150 a.c./d.c.	537809	RD2-48	2CSM242120R1201		0.125	1

Residual current relays

RD3

RD3

RD3M

RD3P

Technical features	RD3/RD3-48	RD3M/RD3M-48	RD3P/RD3P-48
Operating voltage	RD3: 230-400 Vac +10% / -15%	RD3M: 230-400 Vac +10% / -15%	RD3P: 230-400 Vac +10% / -15%
	RD3-48: 12-48 Vac/ Vdc +10% / -15%	RD3M-48: 12-48 Vac/ Vdc +10% / -15%	RD3P-48: 12-48 Vac/ Vdc +10% / -15%
Auxiliary supply frequency	50-60 Hz		
Frequency filter	-	Yes	Yes
Type	A (up to IΔn=5 A) AC (for higher current)		
Operating temperature	-25....+70 °C		
Power consumption	<3.6 W (RD3, RD3M, RD3P), <600 mW RD3-48, RD3M-48, RD3P-48)		
Sensitivity settings IΔn	0.03-0.1-0.3-0.5-1-2-3-5-10-30 A		
Tripping time settings Δt	0-0.06-0.2-0.3-0.5-1-2-3-5-10 s		
Pre-alarm threshold	-	60%	60%
Max. resistance connection between toroidal transformer and relay	3 Ω		
Max. length connection of remote reset button	15 m		
Output Contact capacity (7-8-9); (10-11-12)	8 A, 250 V a.c.		
Led bar indicator	-	-	Yes
Max. cable terminals section	2.5 mm²		
Modules	3		
Dimensions	52.8 × 85 × 64.7 mm		
Protection degree	IP20		
Standards	IEC/EN 60947-2 annex. M		

RD3 residual current relays

The RD3 family of electronic residual current relays provides residual current protection and monitoring functions according to IEC/EN 60947-2:2006 annex M when used in conjunction with external toroids belonging to TR family, all S 200 miniature circuit breakers and Tmax/XT range moulded case devices up to T5/XT4, for industrial installations. The RD3 residual current relays can provide status indications through two output contacts.

Operating voltage	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
[V]	EAN	Type code	Order code		[kg]	pc.
12-48 a.c./d.c.	748236	RD3-48	2CSJ201001R0001		0.13	1
230-400 a.c.	734833	RD3	2CSJ201001R0002		0.25	1
12-48 a.c./d.c.	733935	RD3M-48	2CSJ202001R0001		0.13	1
230-400 a.c.	747031	RD3M	2CSJ202001R0002		0.25	1
12-48 a.c./d.c.	734734	RD3P-48	2CSJ203001R0001		0.13	1
230-400 a.c.	733836	RD3P	2CSJ203001R0002		0.25	1

Front panel residual current relays

ELR

Technical features		ELR48P	ELR72	ELR72P	ELR96	ELR96P	ELR96PF	ELR96PD
Operating voltage	[V]	24, 48, 110, 230 a.c./ 24, 48, 115 d.c.	24, 48, 110, 230 a.c./ 24, 48, 110 d.c.	24, 48, 110 230, 400 a.c./ 24, 48 d.c.	24, 48, 110, 230, 400 a.c./ 24, 48, 110 d.c.	24, 48, 110, 230, 400 a.c./ 24, 48 d.c.	110, 230, 400 a.c.	110, 230, 400 a.c.
Frequency	[Hz]	50 – 60						
Frequency filter		-	-	-	-	-	Yes	Yes
Type		A						
Operating temperature	[°C]	-10...+60						
Power consumption	[W]	<7						
Sensitivity setting IΔn	[A]	from 0,03 to 30						
Tripping time setting Dt	[s]	from 0 to 5						
Contacts	[no.]	2	1	2	1	2	2	2
Contact capacity	[A]	5 (250 V a.c.)						
Dimensions	[mm]	48 x 48	72 x 72	72 x 72	96 x 96	96 x 96	96x96	96 x 96
Digital display		-	-	-	-	-	-	Yes
Protection degree (with cover)		IP52						
Protection degree (without cover)		IP40						
Protection degree (terminals)		IP20						
Standards		IEC EN 60947-2 Annex M						

Front panel residual current relays

ELR

ELR48P

ELR72

ELR96

ELR96PD

ELR front panel residual current relay

Front panel residual current relays are electronic devices used in combination with an external toroidal transformer. ELR devices are according to the protection standard IEC/EN 60947-2 Annex-M when used in conjunction with external toroids belonging to TR family, all S200 miniature circuit breakers and Tmax/XT range moulded case devices up to T5/XT4, for industrial installations.

The sensitivity can be set from 0.03 A to 30 A, while the tripping time from 0 to 5 seconds. Residual current relays are available in versions 48x48 mm, 72x72 mm, and 96x96 mm. The Fail Safe function is available for the whole ELR range (ELR 48, ELR 72, and ELR96 versions).

The ELR96PF version is equipped with Fail Safe function, fault memory LED, and a frequency filter, that ensure continuity of service in the presence of harmonics.

ELR96PD has (in addition to these functions) a digital display for an instantaneous view of the residual current IΔn.

Operating voltage	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
[V]	EAN	Type code	Order code		[kg]	pc.
110 V a.c./d.c. - 230 V a.c.	748229	ELR48P	2CSG252211R1202		0.112	1
24-48 V a.c./d.c.	734826	ELR48V24P	2CSG452211R1202		0.112	1
110 V a.c./d.c. - 230 V a.c.	733928	ELR72	2CSG252120R1202		0.322	1
24-48 V a.c./d.c.	747024	ELR72V24	2CSG452120R1202		0.322	1
110-230-400 V a.c.	734727	ELR72P	2CSG152424R1202		0.322	1
24-48 V a.c./d.c.	733829	ELR72V24P	2CSG452424R1202		0.322	1
110 V. a.c./d.c.-230-400 V a.c.	734628	ELR96	2CSG152130R1202		0.383	1
24-48 V a.c./d.c.	733720	ELR96V24	2CSG452130R1202		0.383	1
110-230-400 V a.c.	734529	ELR96P	2CSG152434R1202		0.383	1
24-48 V a.c./d.c.	733621	ELR96V24P	2CSG452434R1202		0.383	1
110-230-400 V a.c.	734420	ELR96PF	2CSG152435R1202		0.383	1
110-230-400 V a.c.	733522	ELR96PD	2CSG152436R1202		0.383	1

Toroidal transformers

TR

TR

Toroidal transformers

Technical features		TRM	TR1	TR2	TR3	TR4	TR4A	TR160	TR160A	TR5	TR5A	TR6	TR6A
Core		closed	closed	closed	closed	closed	open	closed	open	closed	open	closed	open
Available internal diameter	[mm]	29	35	60	80	110	110	160	160	210	210	300	300
Weight	[kg]	0.17	0.22	0.28	0.45	0.52	0.6	1.35	1.6	1.45	1.85	2.1	2.3
Minimum measurable current	[mA]	30	30	30	100	100	300	300	500	300	500	500	1000
Installation position		Any											
Operating temperature	[°C]	-10...+70											
Storage temperature	[°C]	-20...+80											
Transformation ratio		500/1											
Dielectric test voltage at industrial freq. for 1 min.	[kV]	2.5											
Max. insulating voltage	[V a.c.]	1000											
Max. thermal overload	[kA]	40/1 sec.											
Connections		Screw terminal boards, max. section 2.5 mm²											
Protection degree		IP20											

Dimension Ø	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
[mm]	EAN	Type code	Order code		[kg]	pc.
29 (modular version)	020707	TRM	2CSM029000R1211		0.170	1
35	020301	TR1	2CSG035100R1211		0.212	1
60	020400	TR2	2CSG060100R1211		0.274	1
80	020509	TR3	2CSG080100R1211		0.454	1
110	020608	TR4	2CSG110100R1211		0.530	1
110 (openable version)	743408	TR4/A	2CSG110200R1211		0.600	1
160	743507	TR160	2CSG160100R1211		1.350	1
160 (openable version)	743606	TR160A	2CSG160200R1211		1.600	1
210	024804	TR5	2CSG210100R1211		1.534	1
210 (openable version)	065708	TR5/A	2CSG210200R1211		1.856	1
300	185413	TR6	2CSG300100R1211		2.100	1
300 (openable version)	180715	TR6/A	2CSG300200R1211		2.300	1

ARC FAULT DETECTION DEVICES

Electrical installation solutions for buildings
Arc Fault Detection Devices

Index

AFDD S-ARC1	2
AFDD DS-ARC1	8

AFDD S-ARC1:
Arc Fault Detection Device Integrated with MCB

Easy to install
Twin terminals for separate feeding with busbar and cables. Connection possible both from top and bottom side.

Test pushbutton and self test
Test pushbutton to verify the correct functioning of the arc fault detection device. Internal self test is also continuously running in order to check the arc detection circuit.

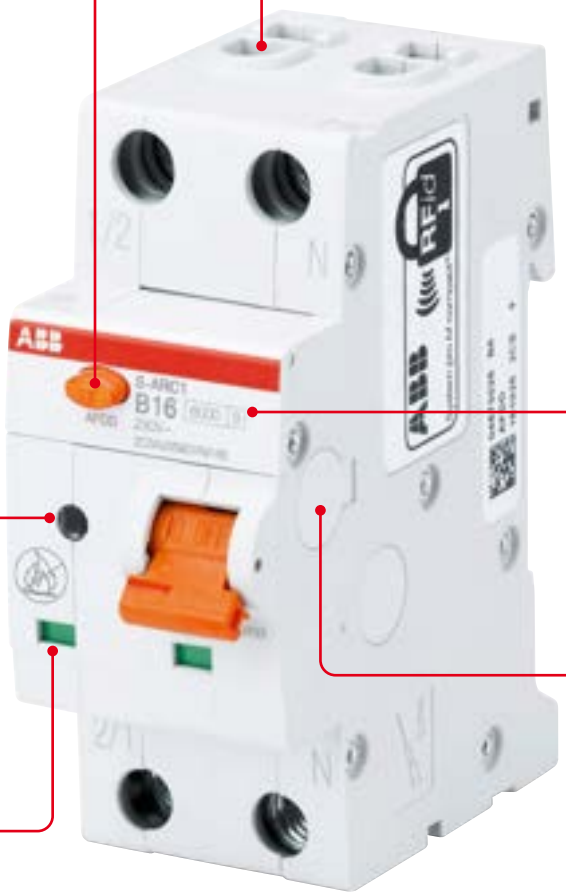

LED for troubleshooting
LED troubleshooting indicator to monitor the operation of the AFDD and give indication of the cause of the trip. Possibility to recall in memory the last tripping due to arc fault and overvoltage.

Laser printed information
Information on the device are laser printed to ensure readability over time.

Combination with auxiliary elements
Platform suitable for combination with System pro M compact® accessories.

Contact position indicator (CPI)
To always know the status of the contacts (red: closed; green: open). Independent from the toggle position

The S-ARC1 is the new 1P+N Arc Fault Detection Device (AFDD) with an integrated Miniature Circuit Breaker (MCB) in only two module width. Besides the overcurrent protection of the MCB, the S-ARC1 provides additional protection against series, parallel and earth arc faults. The series is perfectly integrated with ABB's System pro M compact® range. Combined with a Residual Current Circuit Breaker (RCCB) as upstream device, the S-ARC1 provides the best solution for complete protection of electrical installations in buildings.

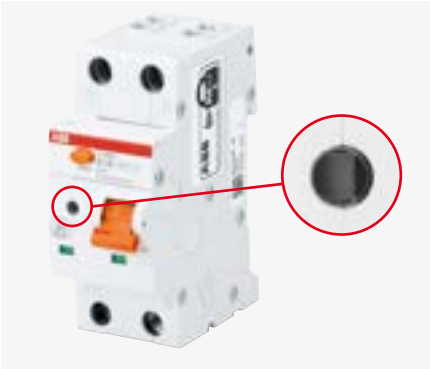

LED for easy troubleshooting
LED to monitor the correct working conditions of the device and have an easier troubleshooting in case of trip. Consequently the downtime for maintenance can be reduced.
– Toggle ON: GREEN LED
– Toggle OFF: LED OFF
– Different indications after the trip, after reclosing the toggle
– Possibility to recall in memory the last tripping due to arc fault and overvoltage

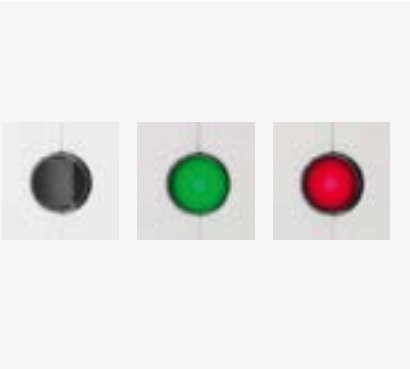

LED color	Blink/ sec	Signalling duration	Cause of trip
Green		Permanent	Manual trip, manual test , overcurrent
Red blinking	1	5 sec	Series arc
Red blinking	2	5 sec	Parallel arc
Red blinking	3	5 sec	Over voltage

In case of internal self test failure, the led can switch off or start blinking green/red alternatively.

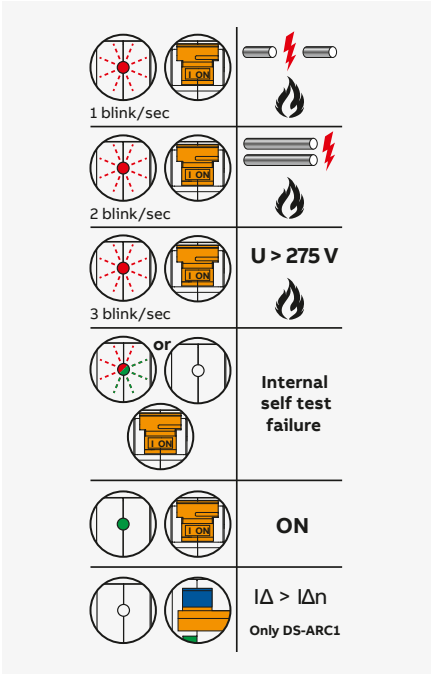

Dedicated sticker for LED
Dedicated sticker that summarizes the LED function is present in addition to the instructions sheet.

Double slot terminals
Fail-safe terminals to avoid improper connection. Two slots of different dimensions (25 mm² and 10 mm²) available to allow the connection both with cables and busbars. Connection possible both from top and bottom side. Standard System pro M compact® clip ensures a stable fixing on DIN rail and easy and fast mounting and dismounting operations.

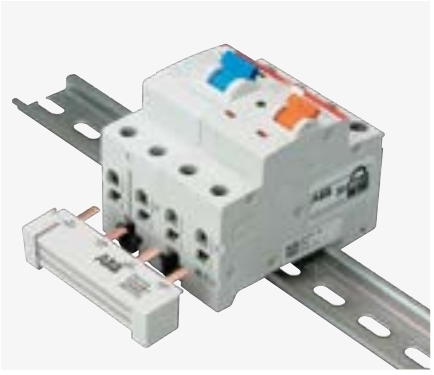

Compatibility with busbars
A quick and easy installation is possible in one step using a standard ABB System pro M compact® busbar: no additional cables required for the wiring.

All information on the device
Main technical information are laser-printed on the front and left side of product to ensure long readability.

AFDD

Technical features and overall dimensions

				S-ARC1	S-ARC1 M
	Standards			IEC/EN 62606; IEC/EN 60898-1	
Electrical Functions	Number of poles			1P + N	
	Rated current I_n		A	6 ≤ In ≤ 40	
	Rated operational voltage U_e		V	230 – 240	
	Rated Insulation voltage Ui acc. to IEC/EN 60664-1		V	500 V AC	
	Overvoltage category			III	
	Pollution degree			2	
	Min. operating voltage		V	170	
	Threshold for protection against overvoltage		V	275	
	Rated frequency f		Hz	50	
	Rated short circuit breaking capacity acc. to IEC/EN 60898-1	I_{cn}	A	6000	10000
	Rated short circuit breking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate I_{cu}	kA	7.5	10
		service I_{cs}	kA	6	7.5
	Rated making and breaking capacity of one individual pole I_{cn1}		A	6000	
	Grid distance		mm	35	
	Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)		kV	4	
	Dielectric test voltage at ind. freq. for 1 min.		kV	2.5 (50/60 Hz)	
	Thermomagnetic release – characteristic	B: 3 I_n ≤ I_m ≤ 5 I_n		■	
		C: 5 I_n ≤ I_m ≤ 10 I_n		■	
	Energy limiting class acc. to EN 60898-1			3	
Mechanical main features	Housing type			Insulation group I, RAL 7035	
	Toggle type			Insulation group II, Orange RAL 2004, sealable in ON-OFF-positions	
	Contact position indication (CPI)			Green/red window	
	Electrical Endurance	cycles (OFF-ON-OFF)		10000	
	Mechanical Endurance	cycles (OFF-ON-OFF)		20000	
	Protection degree acc. to EN 60529	housing		PI40	
		terminals		IP20	
	Resistance to Shock acc. to IEC 60068-2-27			25 g – 2 shocks – 13 ms	
	Resistance to Vibrations acc. to IEC 60068-2-6			0.2 mm or 5 g – 20 cycles at 5 … 150 … 5 Hz	
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/ RH	28 cycles with 55°C/90 – 96 % and 25°C/95 – 100 %	
	Reference temperature for tripping characteristics		°C	30	
	Ambient temperature (with daily average ≤ +35 °C)		°C	-25 … +55	
	Storage temperature		°C	-40 … +70	

AFDD

Technical features and overall dimensions

				S-ARC1	S-ARC1 M
Installation	Terminal type	top / bottom		failsafe bi-directional cylinder-lift terminal (shock protected)	
	Cross-section of conductors	top / bottom	mm^2	25/25	
	Cross-section of busbars	top / bottom	mm^2	10/10	
	Tightening torque	top / bottom	Nm	2.8	
	Wire Stripping Length		mm	12,5	
	Screwdriver			No. 2 Pozidrive	
	Mounting Type			on DIN rail EN 60715 (35mm) by means of mounting clip	
	Mounting position			Any	
	Supply from			Top/Bottom terminals	
Dimensions and weight	Dimensions (H x D x W)		mm	85 x 69 x 35 mm	
	Weight		g	180	
Combination with auxiliary elements		Auxiliary contact		yes	
		Auxiliary/Signal contact		yes	
		Shunt trip		yes	
		Undervoltage release		no	
		Overvoltage release		yes	

AFDD

S-ARC1, B and C characteristic

S-ARC1

S-ARC1, B and C characteristics
Function: protection of end user single-phase circuits against short-circuit currents, overload, earth arc faults, parallel arc faults and series arc faults.

Application: residential, commercial
Standard: IEC 62606; EN 62606; IEC 60898-1; EN 60898-1
Icn = 6 000 A

S-ARC1, B-Characteristic

No. of poles	Rated	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	current In A	EAN	Type code	Order code		kg	pc.
1+N	6	750130	S-ARC1 B6	2CSA255901R9065		0.18	1
	10	178132	S-ARC1 B10	2CSA255901R9105		0.18	1
	13	750031	S-ARC1 B13	2CSA255901R9135		0.18	1
	16	178033	S-ARC1 B16	2CSA255901R9165		0.18	1
	20	749936	S-ARC1 B20	2CSA255901R9205		0.18	1
	25	341116	S-ARC1 B25	2CSA255901R9255		0.18	1
	32	341017	S-ARC1 B32	2CSA255901R9325		0.18	1
	40	340812	S-ARC1 B40	2CSA255901R9405		0.18	1

C-Characteristic

No. of poles	Rated	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	current In A	EAN	Type code	Order code		kg	pc.
1+N	6	177937	S-ARC1 C6	2CSA255901R9064		0.18	1
	10	749837	S-ARC1 C10	2CSA255901R9104		0.18	1
	13	500735	S-ARC1 C13	2CSA255901R9134		0.18	1
	16	886136	S-ARC1 C16	2CSA255901R9164		0.18	1
	20	175438	S-ARC1 C20	2CSA255901R9204		0.18	1
	25	374114	S-ARC1 C25	2CSA255901R9254		0.18	1
	32	374015	S-ARC1 C32	2CSA255901R9324		0.18	1
	40	373919	S-ARC1 C40	2CSA255901R9404		0.18	1

AFDD

S-ARC1 M, B and C characteristic

S-ARC1 M

S-ARC1 M, B and C characteristics
Function: protection of end user single-phase circuits against short-circuit currents, overload, earth arc faults, parallel arc faults and series arc faults.

Application: residential, commercial
Standard: IEC 62606; EN 62606; IEC 60898-1; EN 60898-1
Icn = 10 000 A

S-ARC1 M - B Characteristics

No. of poles	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	6	374312	S-ARC1 M B6	2CSA275901R9065		0.18	1
	10	342113	S-ARC1 M B10	2CSA275901R9105		0.18	1
	13	342014	S-ARC1 M B13	2CSA275901R9135		0.18	1
	16	342212	S-ARC1 M B16	2CSA275901R9165		0.18	1
	20	341215	S-ARC1 M B20	2CSA275901R9205		0.18	1
	25	341413	S-ARC1 M B25	2CSA275901R9255		0.18	1
	32	341314	S-ARC1 M B32	2CSA275901R9325		0.18	1
	40	339915	S-ARC1 M B40	2CSA275901R9405		0.18	1

S-ARC1 M - C characteristics

No. of poles	Rated current In A	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
1P+N	6	339816	S-ARC1 M C6	2CSA275901R9064		0.18	1
	10	339717	S-ARC1 M C10	2CSA275901R9104		0.18	1
	13	339618	S-ARC1 M C13	2CSA275901R9134		0.18	1
	16	340416	S-ARC1 M C16	2CSA275901R9164		0.18	1
	20	340317	S-ARC1 M C20	2CSA275901R9204		0.18	1
	25	340218	S-ARC1 M C25	2CSA275901R9254		0.18	1
	32	340119	S-ARC1 M C32	2CSA275901R9324		0.18	1
	40	340010	S-ARC1 M C40	2CSA275901R9404		0.18	1

AFDD DS-ARC1:
Arc Fault Detection Device Integrated with RCBO

Easy to install
Twin terminals for separate feeding with busbar and cables. Connection possible both from top and bottom side.

Test pushbutton and self test
White test pushbutton to verify the correct functioning of RCD. Orange test pushbutton to verify the correct functioning of AFDD. Internal self test is also continuously running in order to check the arc detection circuit.

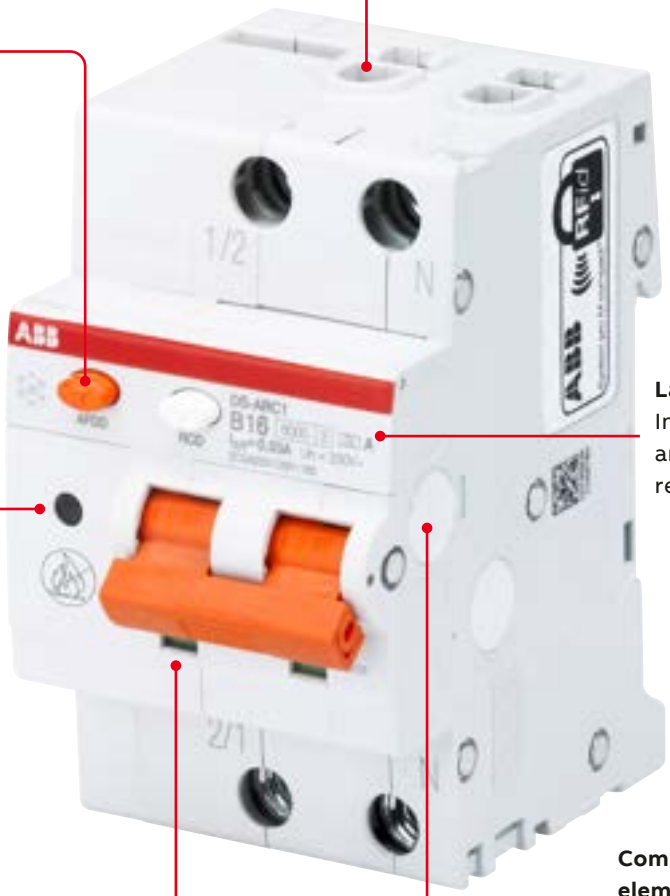

Laser printed information
Information on the device are laser printed to ensure readability over time.

LED for troubleshooting
LED troubleshooting indicator to monitor the operation of the AFDD and give indication of the cause of the trip. Possibility to recall in memory the last tripping due to arc fault and overvoltage.

Contact position indicator (CPI)
To always know the status of the contacts (red: closed; green: open). Independent from the toggle position.

Combination with auxiliary elements
Platform suitable for combination with System pro M compact® accessories. Combination possible also with auxiliary for bottom fitting.

The DS-ARC1 is the new 1P+N Arc Fault Detection Device (AFDD) with an integrated residual current circuit breaker with overcurrent protection (RCBO) in only three module width.
The series offers a complete protection against arc faults and overvoltage, reducing the risk of fire.
The integrated RCBO is adding protection against overcurrent and earth fault currents: compact solution for a complete protection of people and valuable assets.

LED for easy troubleshooting
LED to monitor the correct working conditions of the device and have an easier troubleshooting in case of trip. Consequently the downtime for maintenance can be reduced.
– Toggle ON: GREEN LED
– Toggle OFF: LED OFF
– Different indications after the trip, after reclosing the toggle
– Possibility to recall in memory the last tripping due to arc fault and overvoltage

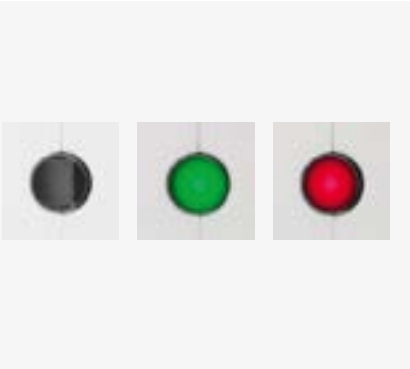

LED color	Blink/ sec	Signalling duration	Cause of trip
Green		Permanent	Manual trip, manual test , overcurrent
Red blinking	1	5 sec	Series arc
Red blinking	2	5 sec	Parallel arc
Red blinking	3	5 sec	Over voltage

In case of internal self test failure, the led can switch off or start blinking green/red alternatively.

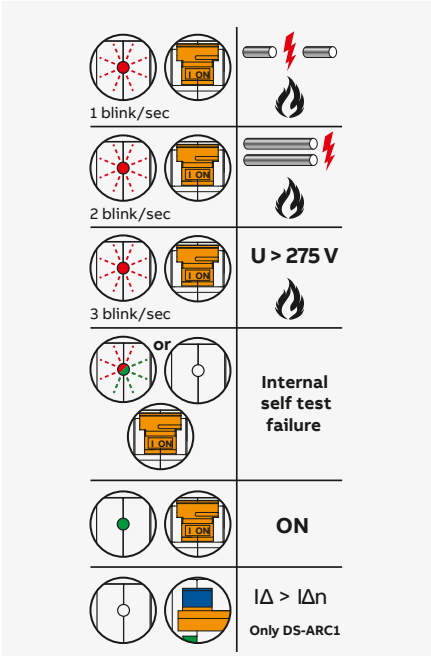

Dedicated sticker for LED
Dedicated sticker that summarizes the LED function is present in addition to the instructions sheet.

Double slot terminals
Fail-safe terminals to avoid improper connection. Two slots of different dimensions (25 mm² and 10 mm²) available to allow the connection both with cables and busbars. Connection possible both from top and bottom side.Standard System pro M compact® clip ensures a stable fixing on DIN rail and easy and fast mounting and dismounting operations.

Compatibility with busbars
A quick and easy installation is possible in one step using dedicated busbars for DS-ARC1 installation no additional cables required for the wiring.

Earth fault indicator
Blue flag on the toggle to identify earth fault trips, making the troubleshooting easier while reducing the downtime for maintenance operations. In case of earth fault trip, after reclosing the toggle, the LED becomes green.

AFDD

DS-ARC1 arc fault detection device with integrated RCBO – technical data

				DS-ARC1	DS-ARC1 M
	Standards			IEC/EN 62606; IEC/EN 61009-1; IEC/EN 61009-2-1	
Electrical Functions	Type (wave form of the earth leakage sensed)			A	
	Number of poles			1P + N	
	Rated current I_n		A	6 ≤ In ≤ 20	
	Rated sensitivity $I_{\Delta m}$		A	0.03	
	Rated operational voltage U_e		V	230 – 240	
	Rated Insulation voltage U_i acc. to IEC/EN 60664-1		V	500 V AC	
	Overvoltage category			III	
	Pollution degree			2	
	Operating voltage of RCD circuit test U_t		V	170 – 264	
	Threshold for protection against overvoltage		V	275	
	Rated frequency f		Hz	50	
	Rated short circuit breaking capacity acc. to IEC/EN 61009-1	I_{cn}	A	6000	10000
	Rated short circuit breaking capacity acc. to IEC/EN 60947-2 (only referring to internal short circuit test)	ultimate I_{cu}	kA	7.5	10
		service I_{cs}	kA	6	7.5
	Rated residual breaking capacity $I_{\Delta m}$	$I_{\Delta m}$	A	6000	
	Grid distance		mm	35	
	Rated impulse withstand voltage $U_{imp.}$ (1.2/50µs)		kV	4	
	Dielectric test voltage at ind. freq. for 1 min.		kV	2.5 (50/60 Hz, 1 min.)	
	Tripping characteristic	B: 3 $I_n \le I_m \le 5\ I_n$		■	
		C: 5 $I_n \le I_m \le 10\ I_n$		■	
	Energy limiting class			3	
Mechanical Main features	Housing type			Insulation group I, RAL 7035	
	Toggle type			Insulation group II, Orange RAL 2004, sealable in ON-OFF-positions	
	Contact position indication (CPI)			Green/red window	
	Earth fault trip indication			Blue flag on toggle	
	Electrical Endurance	cycles (OFF-ON-OFF)		10000	
	Mechanical Endurance	cycles (OFF-ON-OFF)		20000	
	Protection degree acc. to EN 60529	housing		IP40	
		terminals		IP20	
	Resistance to Shock acc. to IEC 60068-2-27			25 g – 2 shocks – 13 ms	
	Resistance to Vibrations acc. to IEC 60068-2-6			0.2 mm or 5 g – 20 cycles at 5 … 150 … 5 Hz	
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C/ RH	28 cycles with 55°C/90 – 96 % and 25°C/95 – 100 %	
	Reference temperature for tripping characteristics		°C	30	
	Ambient temperature (with daily average ≤ +35 °C)		°C	-25 … +55	
	Storage temperature		°C	-40 … +70	
Assembly	Terminal type	top/bottom		failsafe bi-directional cylinder-lift terminal (shock-protected)	
	Cross-section of conductors	top/bottom	mm²	25/25	
	Cross-section of busbars	top/bottom	mm²	10/10	
	Tightening torque	top/bottom	Nm	2.8	
	Wire Stripping Length		mm	12	
	Screwdriver			No. 2 Pozidrive	
	Mounting type			on DIN rail EN 60715 (35 mm) by means of mounting clip	
	Mounting position			any	
	Supply from			Top/bottom terminals	
Dimensions and weight	Dimensions (H x D x W)		mm	85 × 69 × 52.5	
	Weight		g	240	

AFDD

DS-ARC1 arc fault detection device with integrated RCBO – technical data

		DS-ARC1	DS-ARC1 M
		IEC/EN 62606; IEC/EN 61009-1; IEC/EN 61009-2-1	
Combination with auxiliary elements	Auxiliary contact	yes	
	Auxiliary/Signal contact	yes	
	Bottom fitting auxiliary contact	yes	
	Shunt trip	yes	
	Undervoltage release	no	
	Overvoltage release	yes	

AFDD

DS-ARC1 and DS-ARC1 M

DS-ARC1

DS-ARC1, 6 kA, B and C characteristics
Function: protection of end user single-phase circuits against short-circuit currents, overload, earth arc faults, parallel arc faults, series arc faults, earth faults currents.

Application: residential, commercial
Standard: IEC/EN 62606; IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 6 000 A

Number of poles	Rated residual currrent IΔm mA	Charac-teristics	Rated current I_n A	Bbn 8012542 EAN	Ordering details Type code	Order code	Weight 1 pcs kg	Pkg qty pce
1P+N	30	B	6	736516	DS-ARC1 B6 A30	2CSA255103R1065	0.240	1
			10	735618	DS-ARC1 B10 A30	2CSA255103R1105	0.240	1
			13	736417	DS-ARC1 B13 A30	2CSA255103R1135	0.240	1
			16	735519	DS-ARC1 B16 A30	2CSA255103R1165	0.240	1
			20	736318	DS-ARC1 B20 A30	2CSA255103R1205	0.240	1
1P+N	30	C	6	736110	DS-ARC1 C6 A30	2CSA255103R1064	0.240	1
			10	735212	DS-ARC1 C10 A30	2CSA255103R1104	0.240	1
			13	748311	DS-ARC1 C13 A30	2CSA255103R1134	0.240	1
			16	611110	DS-ARC1 C16 A30	2CSA255103R1164	0.240	1
			20	735113	DS-ARC1 C20 A30	2CSA255103R1204	0.240	1

DS-ARC1

DS-ARC1 M, 10 kA, B and C characteristics
Function: protection of end user single-phase circuits against short-circuit currents, overload, earth arc faults, parallel arc faults, series arc faults, earth faults currents.

Application: residential, commercial
Standard: IEC/EN 62606; IEC/EN 61009-1; IEC/EN 61009-2-1
Icn = 10 000 A

Number of poles	Rated residual currrent IΔm mA	Charac-teristics	Rated current I_n A	Bbn 8012542 EAN	Ordering details Type code	Order code	Weight 1 pcs kg	Pkg qty pce
1P+N	30	B	6	734710	DS-ARC1 M B6 A30	2CSA275103R1065	0.240	1
			10	733812	DS-ARC1 M B10 A30	2CSA275103R1105	0.240	1
			13	734611	DS-ARC1 M B13 A30	2CSA275103R1135	0.240	1
			16	733713	DS-ARC1 M B16 A30	2CSA275103R1165	0.240	1
			20	734512	DS-ARC1 M B20 A30	2CSA275103R1205	0.240	1
1P+N	30	C	6	734314	DS-ARC1 M C6 A30	2CSA275103R1064	0.240	1
			10	733416	DS-ARC1 M C10 A30	2CSA275103R1104	0.240	1
			13	748113	DS-ARC1 M C13 A30	2CSA275103R1134	0.240	1
			16	611011	DS-ARC1 M C16 A30	2CSA275103R1164	0.240	1
			20	748014	DS-ARC1 M C20 A30	2CSA275103R1204	0.240	1

Notes

ACCESSORIES FOR MCBS, RCDS, AFDDS AND SWITCH DISCONNECTORS

Electrical installation solutions for buildings

Accessories for MCBs, RCDs, AFDDs and Switch disconnectors

Index

Selection tables	2
Selection guide	6
Auxiliary elements for MCBs S200, S300P, S200C, SN201, RCDs F200, DS200, DS201, DS202C, DS202CR, DS203NC, DSE201 M, DSN201E, DSE201 NS, AFDDs S-ARC1, DS-ARC1 and Switch disconnectors SD200	26
Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors	38
Motor operating and autoreclosing devices for MCBs, RCDs and Switch Disconnectors	40
Auxiliary elements combination with MOD and AR units	44
Busbars and busbars'accessories for MCBs RCDs and AFDDs	48
Busbars and busbars'accessories for MCBs, RCDs and AFDDs - Selection guide	52
Busbars and busbars'accessories for MCBs, RCDs and AFDDs - Busbars PS	60
Busbars and busbars' accessories for MCBs, RCDs and AFDDs - Accessories for Busbars	66
Busbars and accessories for Compact RCBOs DS301C	71
Accessories for S200, SN201, F200, DS200 and other series	78
Auxiliary elements for S750 DR	88
Auxiliary elements for MCBs S800 series	89
UNIFIX rapid wiring system	109

Auxiliary elements and accessories

Selection tables

	Auxiliary interface and signal contact	**Auxiliary Contact**	**Auxilary Contact (ringtongue)**	**Auxiliary Contact**	**Auxiliary Contact and signal or auxiliary contact**	**Auxiliary Contact (bottom)**	**Shunt Trip**
	SCC-IH6R*	S2C-H6-11R	S2C-H02 T	S2C-H6R	S3C-H-S/H6R	S2C-H01	S2C-A1
	SCC-S6R*	S2C-H6-20R	S2C-H11 T	S2C-S/H6R		S2C-H10	S2C-A2
	DSCC-IH6R*	S2C-H6-02R	S2C-H020 T				S2C-A1L
	DSCC-S6R*	S2C-H11L					S2C-A2L
		S2C-H20L					
		S2C-H02L					
Standards							
EN45545-2 (V0)		■		■	■	■	■
IEC / EN 61373		■		■	■	■	■
MCBs							
S200 Range		■		■	■	■	■
SN201	■			●	●		
S200C	■			●	●		
S200MUC		■		■	■	■	■
S300P (M300P)		■		■	■	■	■
SU200 Range				S2C-H6RU S2C-S6RU			S2C-A1RU S2C-A2RU
MCBs Traction							
S200MT		■		■	■	■	■
S200MTUC		■		■	■	■	■
S200CT	■	●		●	●	●	
S200 MTR (DC)			■			■	
ST200MTR (DC)			■				
RCDs							
F200		■		■	■		
RCCBs							
DS201		■		■	■	■	
DS202CR	DSCC			●	●		
DS203NC	■	●		●	●	■	
RCCBs Traction							
DS201T		■		■	■	■	
AFDDS							
S-ARC1		■		■	■		
DS-ARC1		■		■	■	■	
Switch Disconnectors							
SD200		■		■	■	■	

■ = compatible

● = compatible with interface

* AVAILABLE FROM NOV 25

** F200 up to 100 A or F200B up to 63 A

	Shunt trip	**Shunt Trip (ringtongue)**	**Under Voltage Release**	**Over Voltage Release**	**Motor Operating Device**	**Auto-Reclosing Device**	**Motor Operating Device**
	S3C-A1	S2C-A1T	S3C-UA12*	S2C-OVP1	SC3-MOD24	F3C-AR24	S2C-RM1 DC
	S3C-A2	S2C-A2T	S3C-UA24*	S2C-OVP2	S3C-MOD230	F3C-AR230	S2C-RM2/3 DC
	S3C-A1L	S2C-A1TL	S3C-UA48*			F3C-AR230C 2/30	S2C-RM4 DC
	S3C-A2L	S2C-A2TL	S3C-UA110*			F3C-AR230C 2/300	
		S2C-A1TU	S3C-UA230*			F3C-AR230C 4/30	
		S2C-A2TU	S3C-UA230 D*			F3C-AR230C 4/300	
	■	■					■
	■	■					■
	■		■	■	■		
	●		●	●			
	●		●	●			
	■		■	■	■		
	■		■	■	■		
	■				■		■
	■				■		■
	●						●
		■			■		■
		■			■		■
	■		■	■	■	■**	
	■		■	■	■		
	●		●	●			
	●		●	●			
	■				■		
	■			■			
	■			■			
	■		■	■	■		

Auxiliary elements and accessories

Selection table for S800

Accessory	Auxilary	Auxiliary/Signal	Shunt	Motor
	S800-AUX	**S800-AUX/ALT**	**S800-SOR**	**S800W-RSU**
Standards				
EN45545-2			R26/HL3	
IEC 61373	Category 1 - Class A/B	Category 1 - Class A/B	Category 1 - Class A/B	
Combinable with:				
S800P	■	■	■	■
S800S	■	■	■	■
S800S-UC	■	■	■	■
S800N	■	■	■	■
S800C	■	■	■	■
S800HV	■	■	■	■
S800PV	■	■	■	■
S800U	■	■	■	■

	Motor	**Short Circuit Limiter**		**Undervoltage Release**	**DDA 800**
	S800-RSU-H	**S800-SCL-SR**	**S800HV-SCL-SR**	**S800-UVR**	**DDA 800**
	Category 1 - Class B	Category 1- Class A/B		Category 1- Class A/B	
	■	■		■	■
	■	■		■	■
	■			■	
	■	■		■	■
	■	■		■	■
	■		■	■	
	■			■	
				■	

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with S200, S200M, S200P, S300P, DDA200 + S200 or DS200 (for S200 80-100A no combination with DDA)

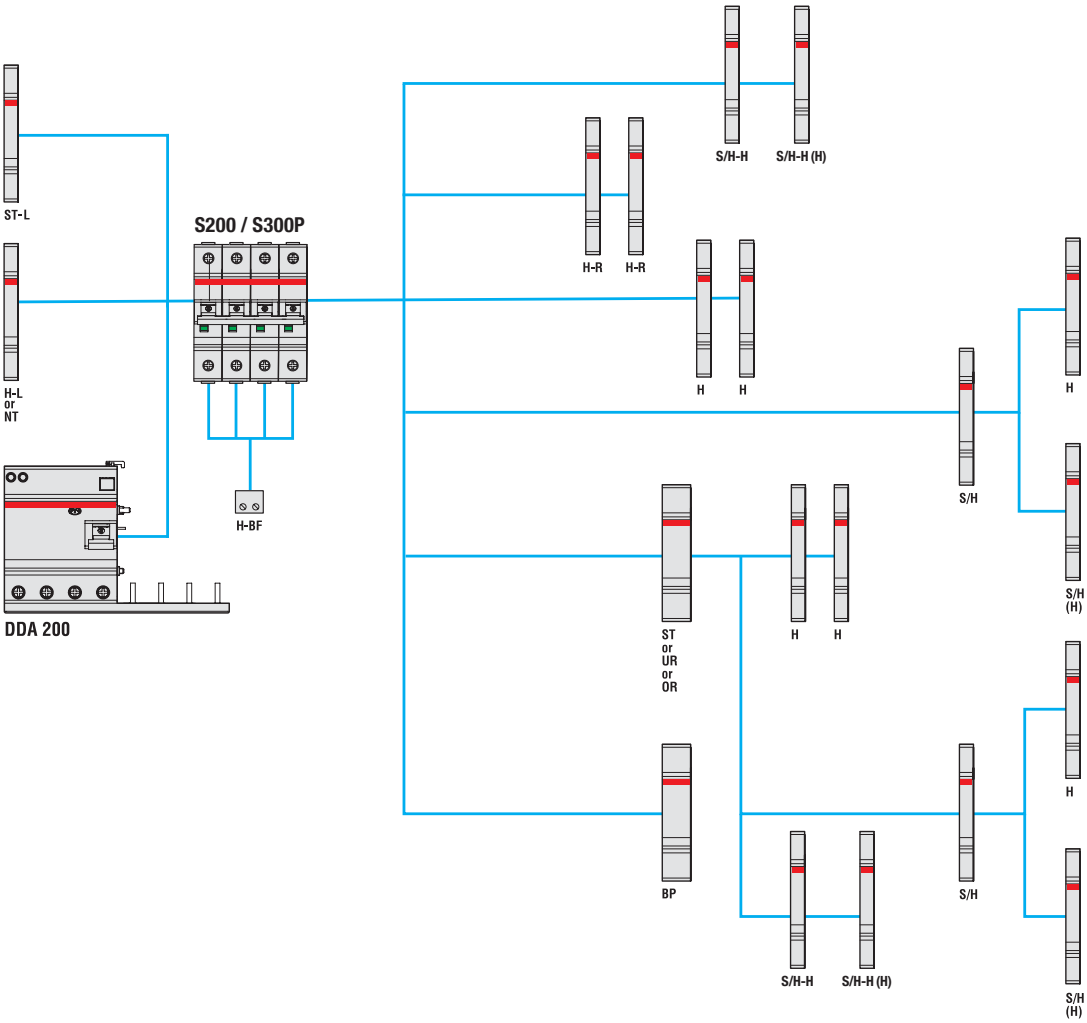

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6-...R
S/H	Signal/Auxiliary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
ST	Shunt trip	S3C-A...
ST-L	Shunt trip to be mounted on the left	S3C-A...L
UR	Undervoltage release	S3C-UA
OR	Overvoltage release	S2C-OVP
H-L *	Auxiliary contact to be mounted on the left	S2C-H...L
H-BF */**	Auxiliary contact for MCBs bottom fitting (1 for each pole of MCB)	S2C-H01/S2C-H10
BP	Mechanical tripping device	S2C-BP
NT	Switched neutral	S2C-Nt
MOD***	Motor operating device	S3C-MOD...

In case of using rotary operating mechanism S2C-DH (only right side mountable) the auxiliary devices left side and bottom fitting auxiliary contact could be used.

* H-L and H-BF cannot be coupled with DS200.
*/** H-BF cannot be coupled with MCB's neutral pole.
*** Please check the scheme can be found in Combination of S200/S300P/SD200 with motor operating device page

Auxiliary elements and accessories for MCBs and RCDs

Selection guide

S200MT (UC)

Auxiliary elements and accessories

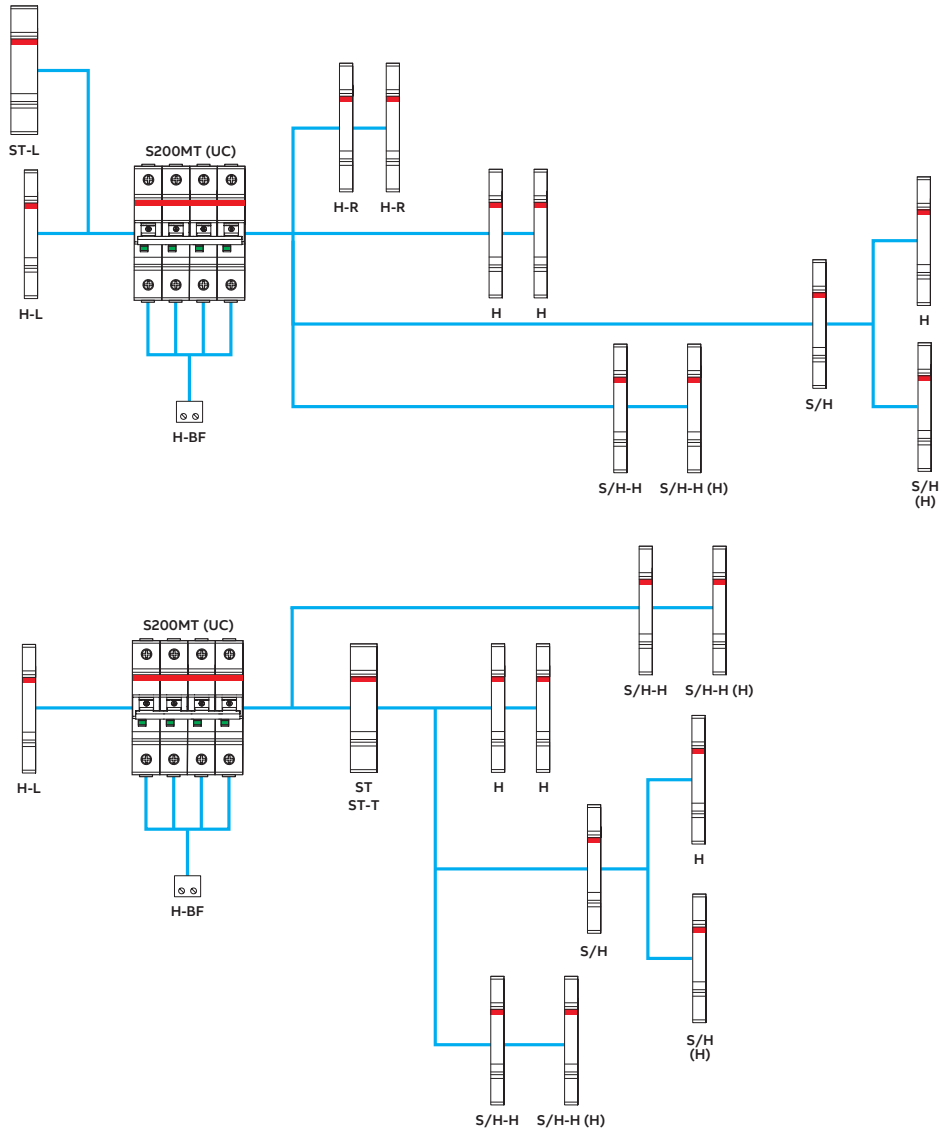

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6-...R
H-L	Auxilary contact for S 200 MTCBs to be mounted on the left	S2C-H...L
H-BF	Auxiliary contact for MCBs bottom fitting (1 for each device)	S2C-H01/S2C-H10
S/H	Signal/Auxilary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxilary contact	S2C-S/H6R
ST	Shunt trip for S 200 MTCB	S2C-A...
ST-L	Shunt trip to be mounted on the left	S2C-A...L
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R

Auxiliary elements and accessories for MCBs and RCDs

Accessories scheme for S200 MTR

Combination of auxiliary elements with S200 MTR and S200 MTR DC MCBs series

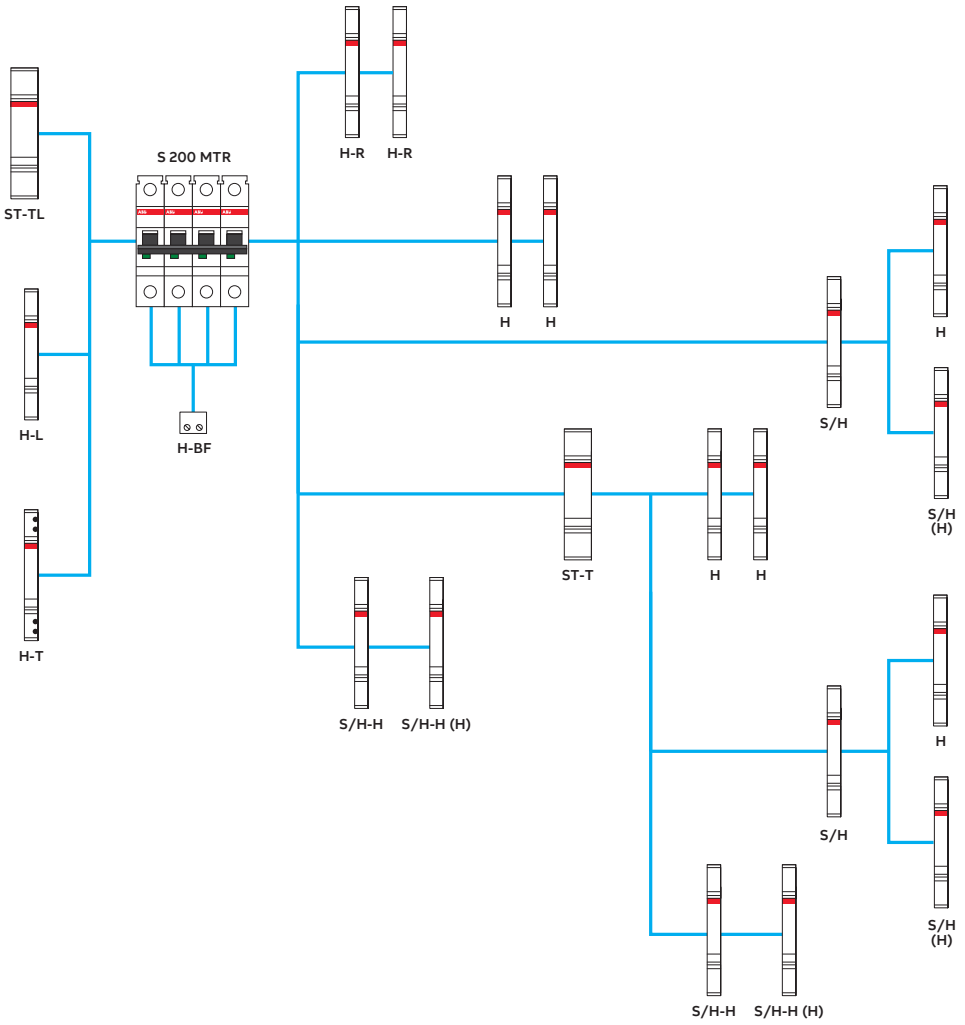

H-T	Auxiliary contact	S2C-H.. T
H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6-...R
S/H	Signal/Auxilary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxilary contact	S2C-S/H6R
ST-L	Shunt trip to be mounted on the left	S2C-A....TL
ST-T	Shunt trip for S 200 MTCB	S2C-AxxT
H-L	Auxilary contact to be mounted on the left	S2C-H...L
H-BF	Auxiliary contact for MCBs bottom fitting (1 for each device)	S2C-H01/S2C-H10
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R

*S200 series MCBs and SD200 switch disconnectros up to 3P or 2P+ST can be coupled with MOD-S

Auxiliary elements and accessories for MCBs and RCDs

Selection guide

Combination of auxiliary elements with ST200 MTR

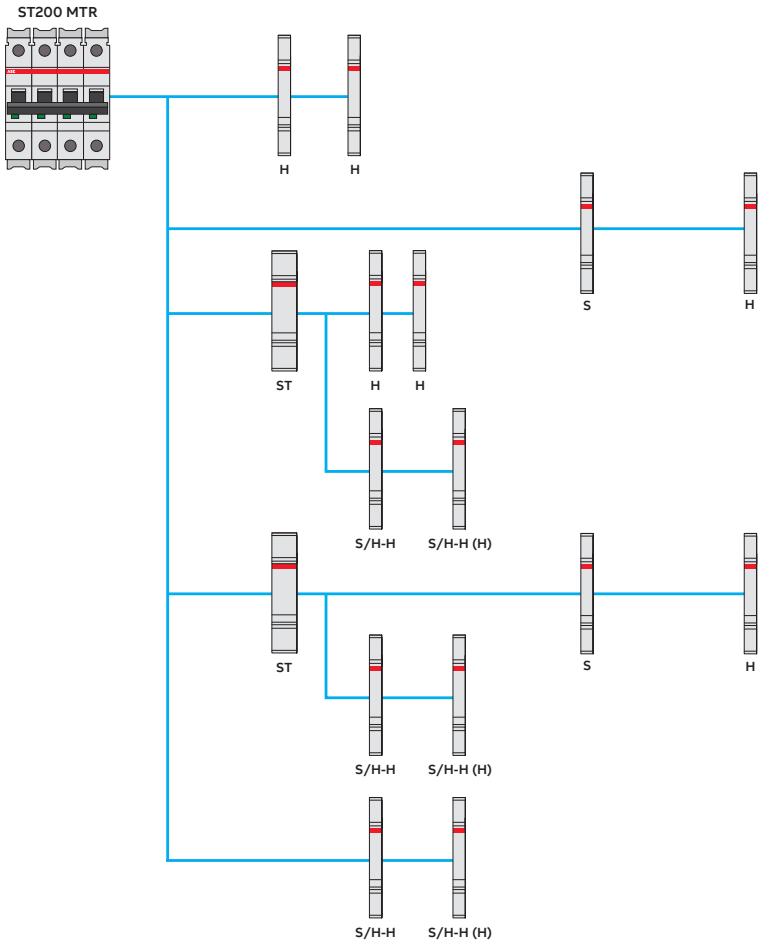

H	Auxiliary contact	S2C-H6RU
S	Signal/Auxiliary contact	S2C-S6RU
ST	Shunt trip	S2C-A...TU
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with S200MR

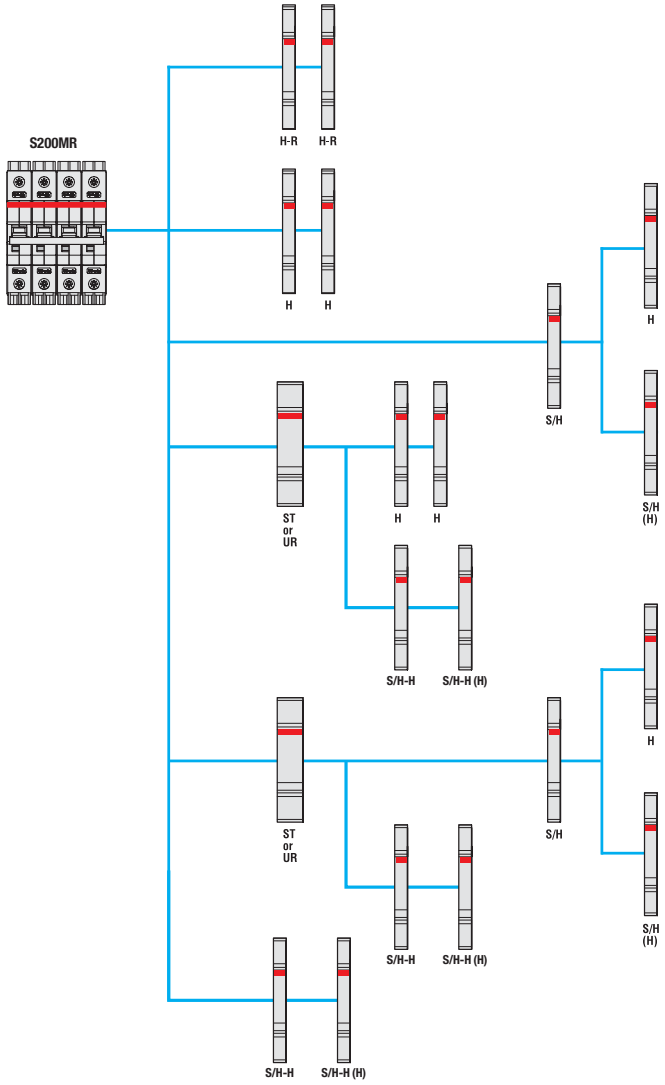

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6-...R
S/H	Signal/Auxiliary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
ST	Shunt trip	S3C-A...
UR	Undervoltage release	S3C-UA
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with SU200M, S200UDC and SU200MR

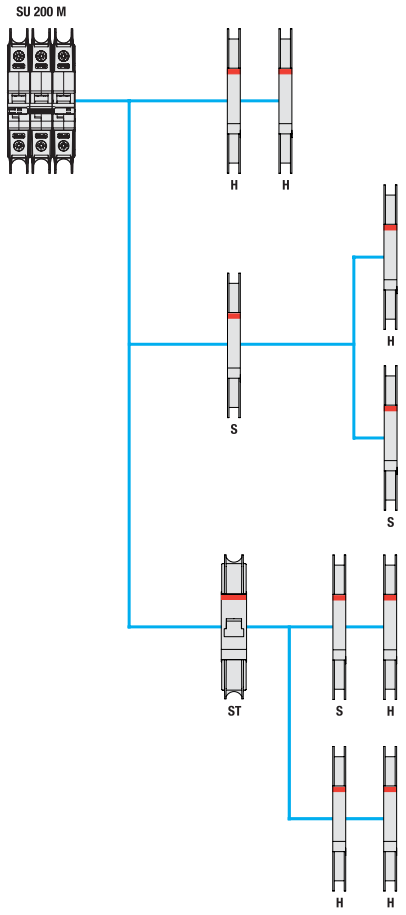

H	Auxiliary contact	S2C-H6RU
S	Signal contact	S2C-S6RU
ST	Shunt trip	S2C-A...U

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with S200C

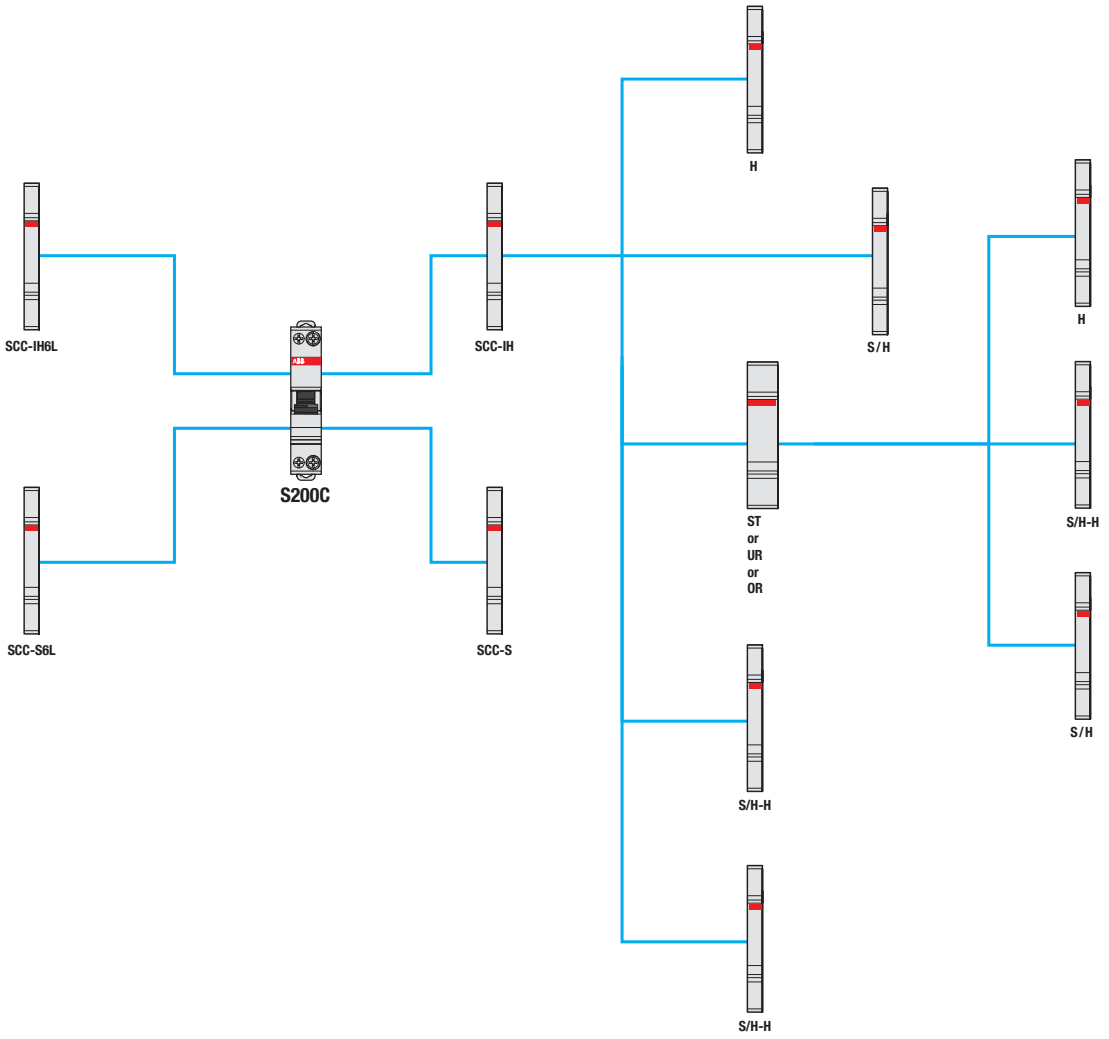

SCC-IH	Auxiliary contact/interface	SCC-IH6R
SCC-S	Signal contact	SCC-S6R
SCC-IHL	Auxiliary contact/interface (left mounting)	SCC-IH6L
SCC-SL	Signal contact (left mounting)	SCC-S6L
H	Auxiliary contact	S2C-H6R
S/H	Signal/auxiliary contact	S2C-S/H6R
ST	Shunt trip	S3C-A...
UR	Undervoltage release	S3C-UA
OR	Overvoltage release	S2C-OVP
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with SN201

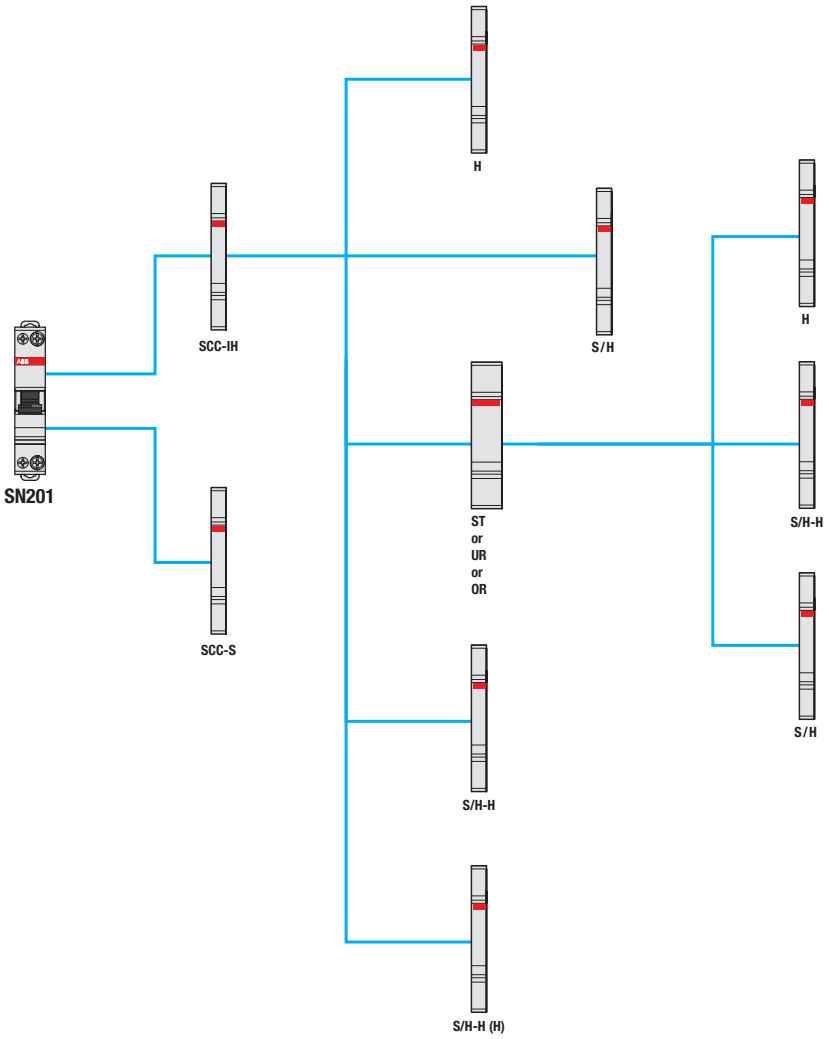

SCC-IH	Auxiliary contact/interface	SCC-IH6R
SCC-S	Signaling contact	SCC-S6R
H	Auxiliary contact	S2C-H6R
S/H	Signal/auxiliary contact	S2C-S/H6R
ST	Shunt trip	S3C-A...
UR	Undervoltage release	S3C-UA
OR	Overvoltage release	S2C-OVP
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with F200

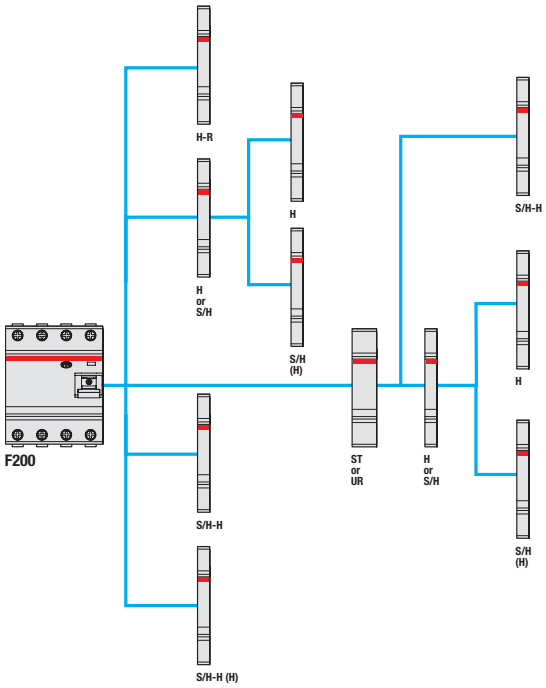

H	Auxiliary contact	S2C-H6R
S/H	Signal/Auxiliary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
H-R	Auxiliary contact	S2C-H6-...R
UR	Undervoltage release	S3C-UA
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
OR	Overvoltage release	S2C-OVP
AR*	Auto reclosing unit	F3C-AR24 & F3C-AR230
MOD*	Motor operating device	S3C-MOD...
ST	Shunt trip	S3C-A...

* Please check that the scheme can be found in Combination of F200 (up to 100A), F200 B type (up to 63 A) and DS201 with motor operating device and Combination of F200 up to 100 A and F200 B type up to 63 A with Autoreclosing units page.

Combination of autoreclosing unit with system check

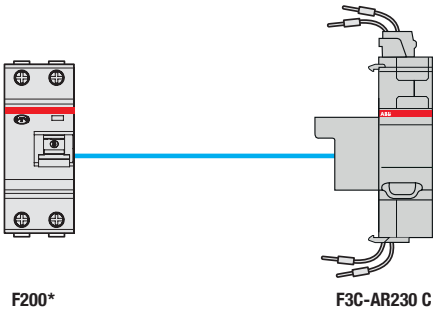

AR	Autoreclosing unit with system check	F3C-AR230 C

* F202 and F204 30 mA or 100 mA (depending on model), max 63 A

Combination of auxiliary elements with F204 125 A, F200 B high ratings

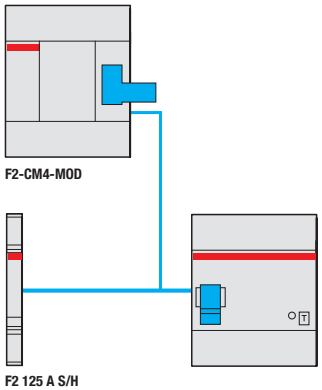

F2-125A-B-S/H	Signal/Auxiliary contact
F2-CM4-MOD	Motor operating device

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with DS201, DS202C

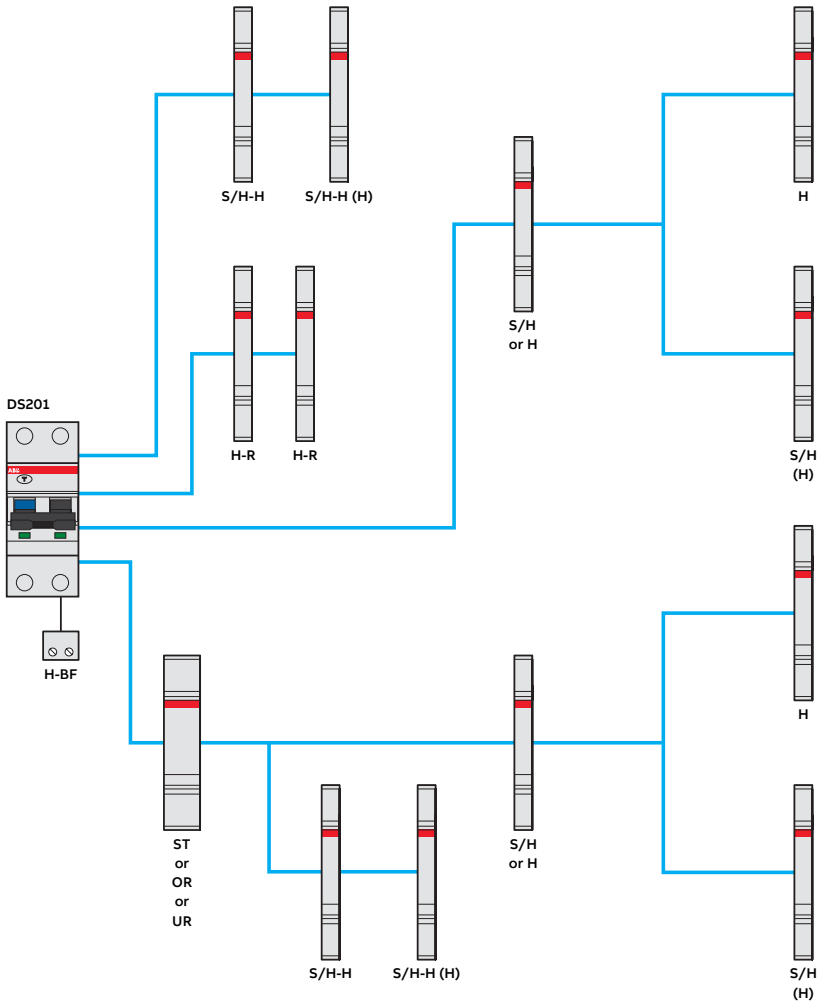

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6-xxR
S/H	Signal / auxiliary contact	S2C-S/H6R
S/H (H)	Signal / auxiliary contact used as auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
ST	Shunt Trip	S3C-A...
OR	Overvoltage release	S2C-OVP
UR	Undervoltage release	S3C-UA
H-BF	Auxiliary contact for bottom fitting (only DS201 (2019))	S2C-H01 / S2C-H10
MOD*	Motor operating device	S3C-MOD...

* Please check the scheme can be found in F200 B type up to 63 A with Autoreclosing units page.

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with DS202CR

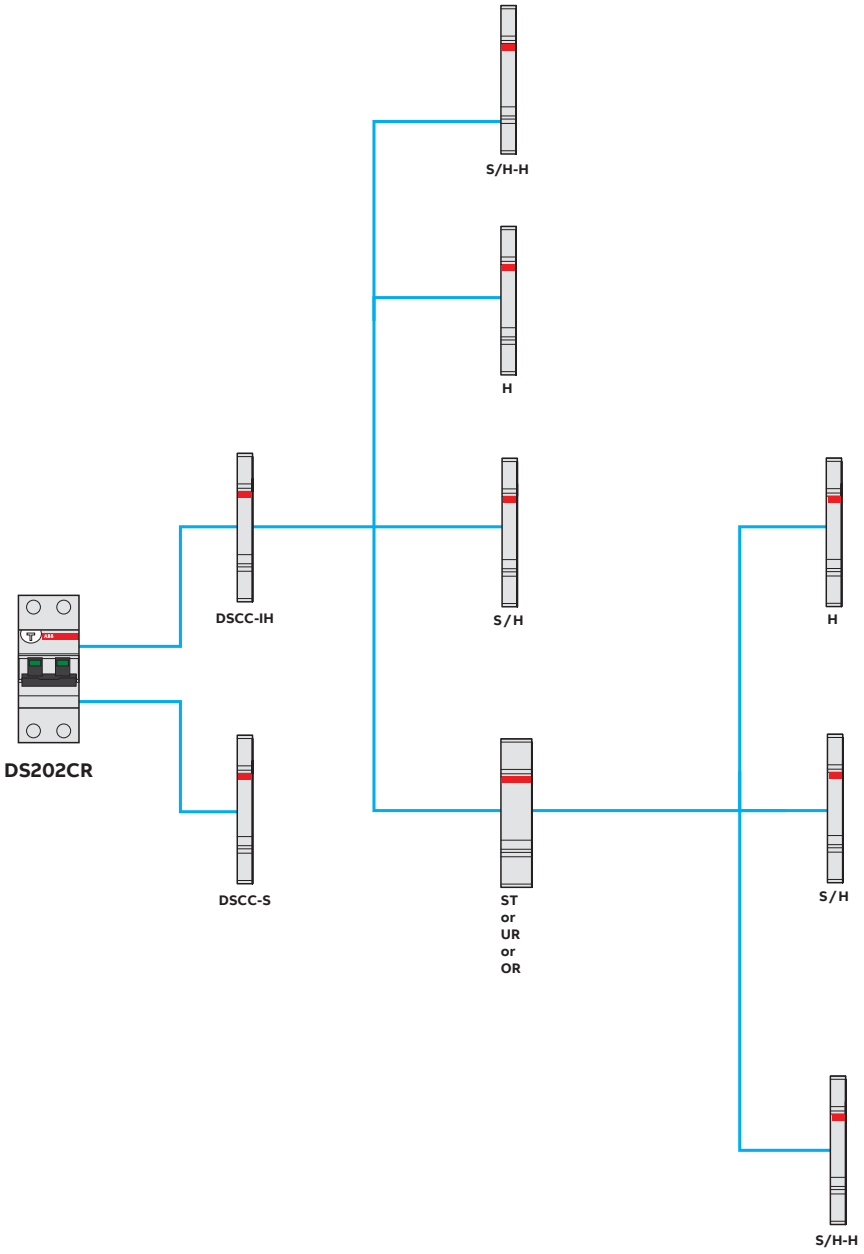

DSCC-IH	Auxiliary contact/interface	DSCC-IH6R
DSCC-S	Signaling contact	DSCC-S6R
H	Auxiliary contact	S2C-H6R
S/H	Signal/auxiliary contact	S2C-S/H6R
ST	Shunt trip	S3C-A...
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
UR	Undervoltage release	S3C-UA*
OR	Overvoltage release	S2C-OVP
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R

* S3C-UA can accept only one auxiliary or signal contact mounted after it

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with DS203NC

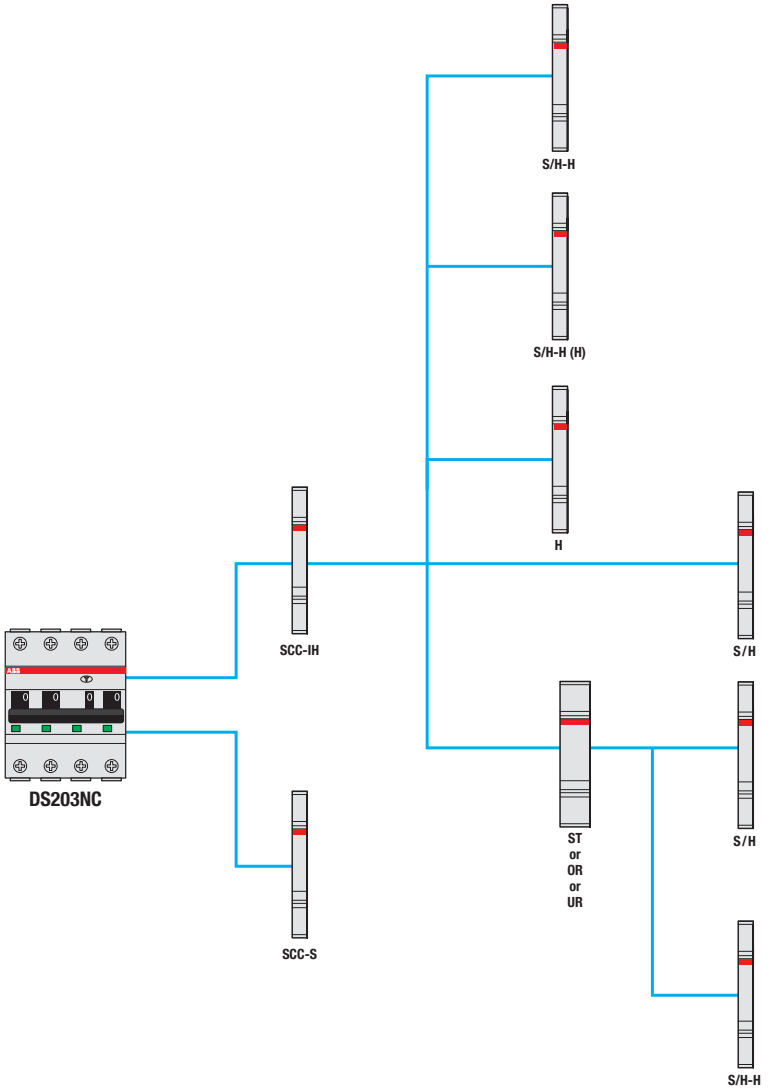

SCC-IH	Auxiliary contact/interface	SCC-IH6R
SCC-S	Signaling contact	SCC-S6R
H	Auxiliary contact	S2C-H6R
S/H	Signal/auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
ST	Shunt trip	S3C-A...
UR	Undervoltage release	S3C-UA*
OR	Overvoltage release	S2C-OVP

* S3C-UA can accept only one auxiliary or signal contact mounted after it

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with DSE201M

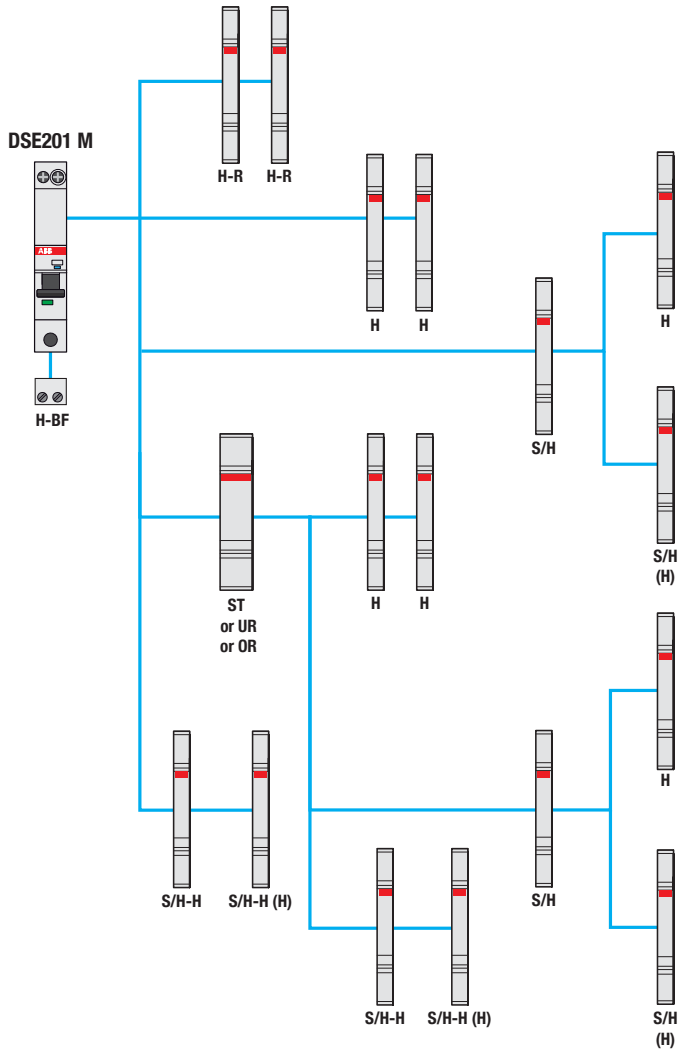

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6R / S2C-H6-xxR
S/H	Signal/Auxiliary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
ST	Shunt trip	S3C-A...
UR	Undervoltage release	S3C-UA
OR	Overvoltage release	S2C-OVP
H-BF	Auxiliary contact for bottom fitting	S2C-H01 / S2C-H10

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with DSN201E, DSE201 NS

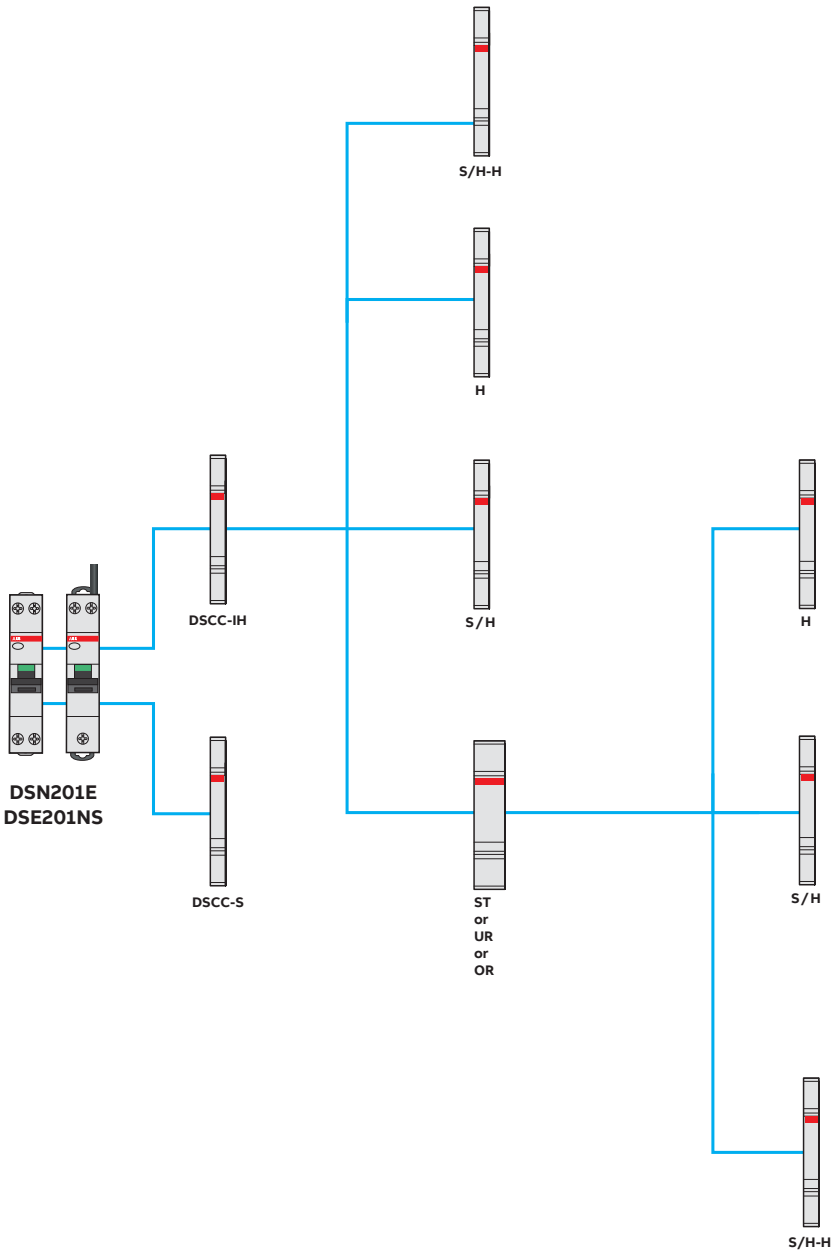

DSCC-IH	Auxiliary contact/interface	DSCC-IH6R
DSCC-S	Signaling contact	DSCC-S6R
H	Auxiliary contact	S2C-H6R
S/H	Signal/auxiliary contact	S2C-S/H6R
ST	Shunt trip	S3C-A...
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
UR	Undervoltage release	S3C-UA*
OR	Overvoltage release	S2C-OVP
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R

* S3C-UA can accept only one auxiliary or signal contact mounted after it

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with S-ARC1 and S-ARC1 M

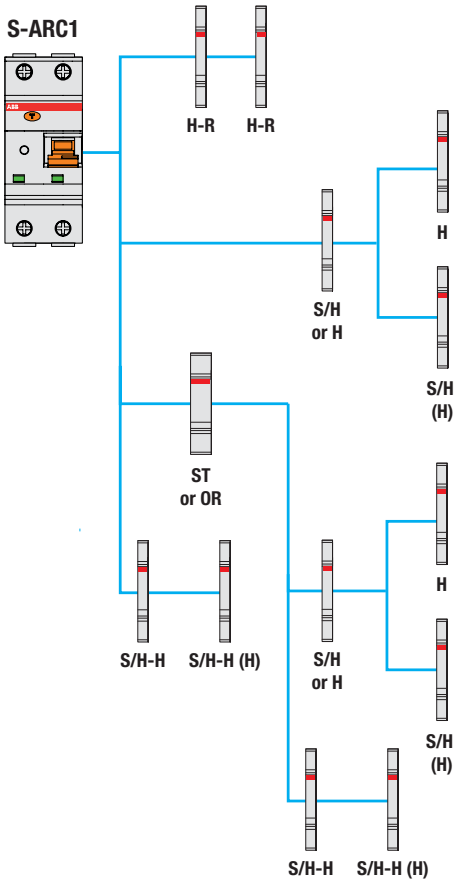

Combination of auxiliary elements with DS-ARC1

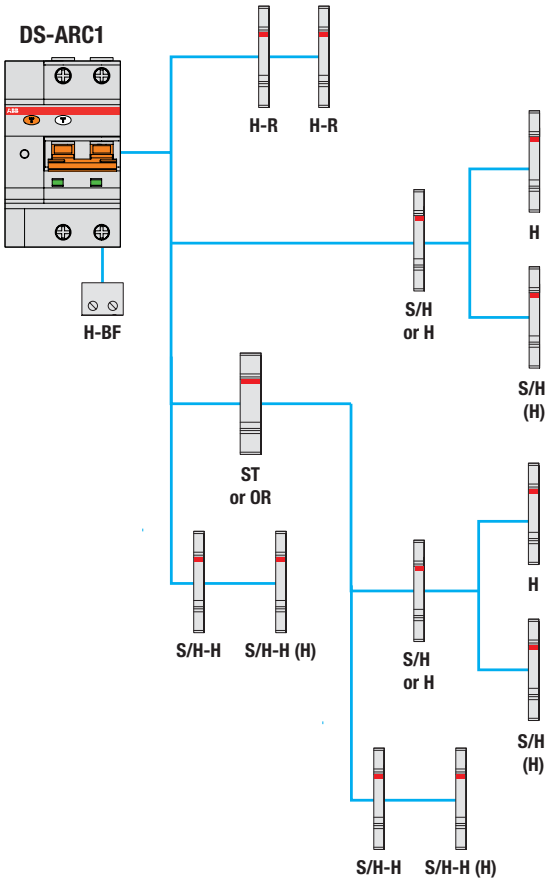

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6R / S2C-H6-xxR
S/H	Signal/Auxiliary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
ST	Shunt trip	S3C-A...
OR	Overvoltage release	S2C-OVP

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6R / S2C-H6-xxR
S/H	Signal/Auxiliary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
ST	Shunt trip	S3C-A...
OR	Overvoltage release	S2C-OVP
H-BF	Auxiliary contact for bottom fitting	S2C-H01/ S2C-H10

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of auxiliary elements with SD200

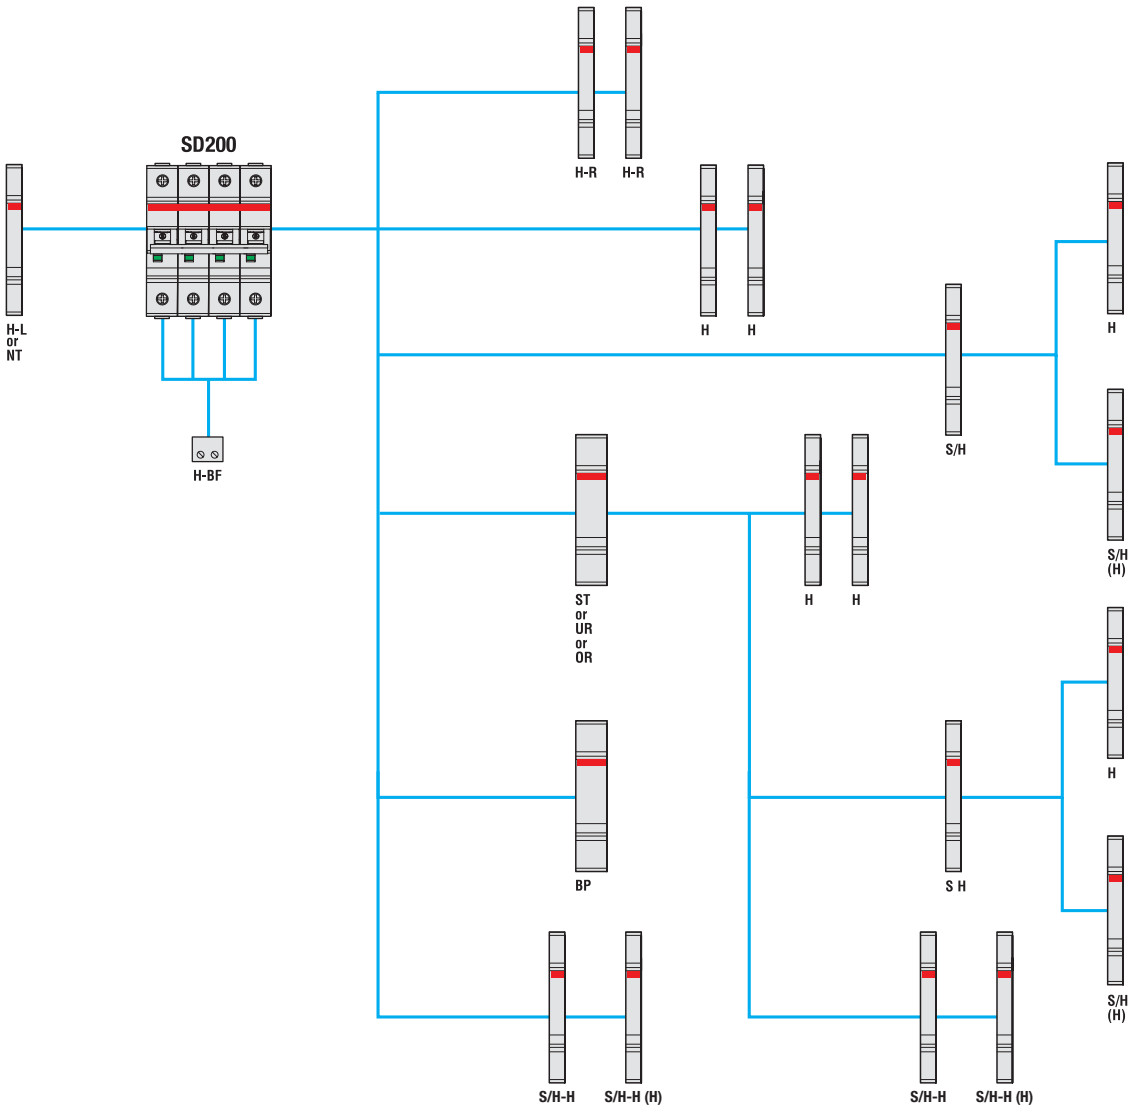

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6-...R
S/H	Signal/Auxiliary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
NT	Switched neutral	S2C-Nt
OR	Overvoltage release	S2C-OVP
BP	Mechanical tripping device	S2C-BP
ST	Shunt trip	S3C-A...
UR	Undervoltage release	S2C-UA
MOD*	Motor operating device	S3C-MOD...

* Please check the scheme can be found in Combination of S200/S300P/SD200 with motor operating device page.

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of S200/S300P/SD200 with motor operating device

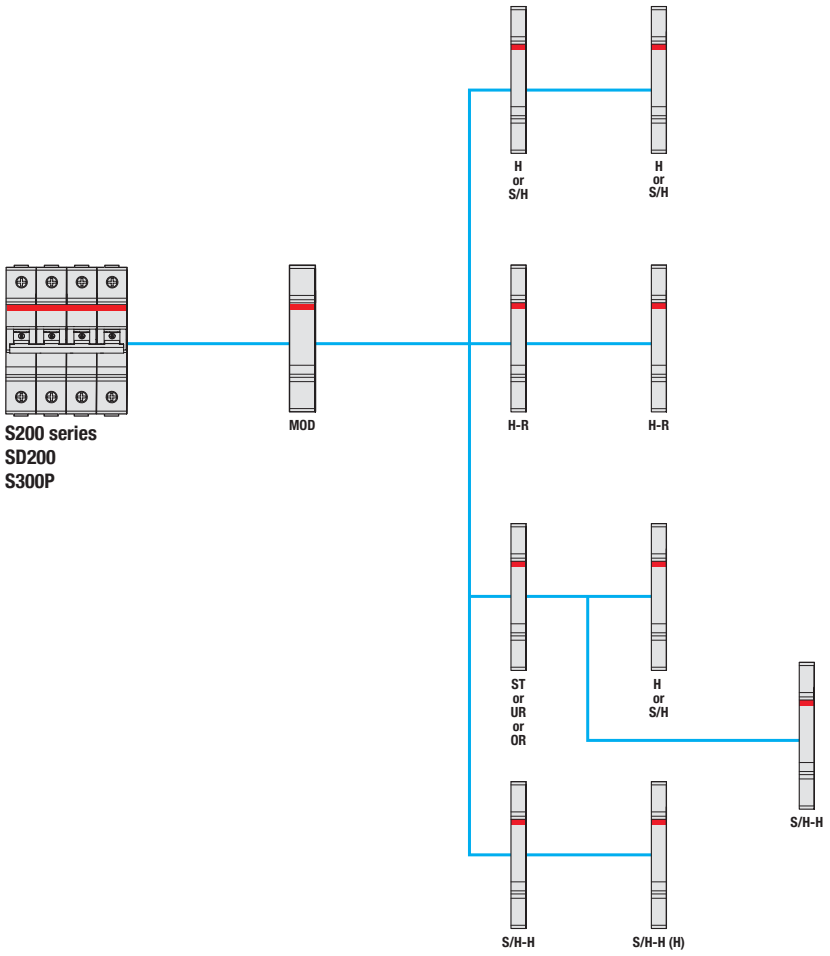

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6-...R
S/H	Signal/Auxiliary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
ST	Shunt trip	S3C-A...
UR	Undervoltage release	S3C-UA
OR	Overvoltage release	S2C-OVP
MOD*	Motor operating device	S3C-MOD...

* In case of using S 200 coupled with DDA 200, MOD doesn't operate in case of earth-leakage fault
** Coupling with S204 or SD204 allowed only in case of DC supply for the MOD which operate at 24...48 V

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of F200 (up to 100A), F200 B type (up to 63 A) and DS201 with motor operating device

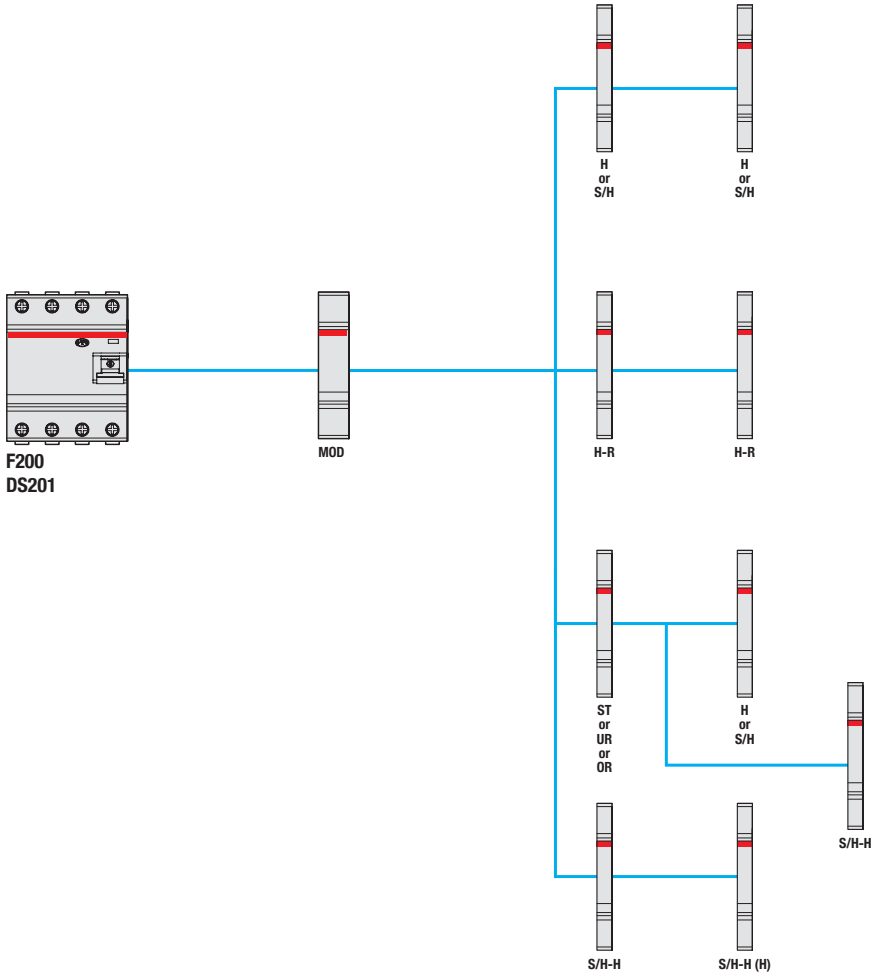

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6-xxR
S/H	Signal / auxiliary contact	S2C-S/H6R
S/H (H)	Signal / auxiliary contact used as auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
ST	Shunt Trip	S3C-A...
OR	Overvoltage release	S2C-OVP
UR	Undervoltage release	S3C-UA
MOD*	Motor operating device	S3C-MOD...

* Accessory combination is not allowed for DS201

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of F200 up to 100 A and F200 B type up to 63 A with Autoreclosing units

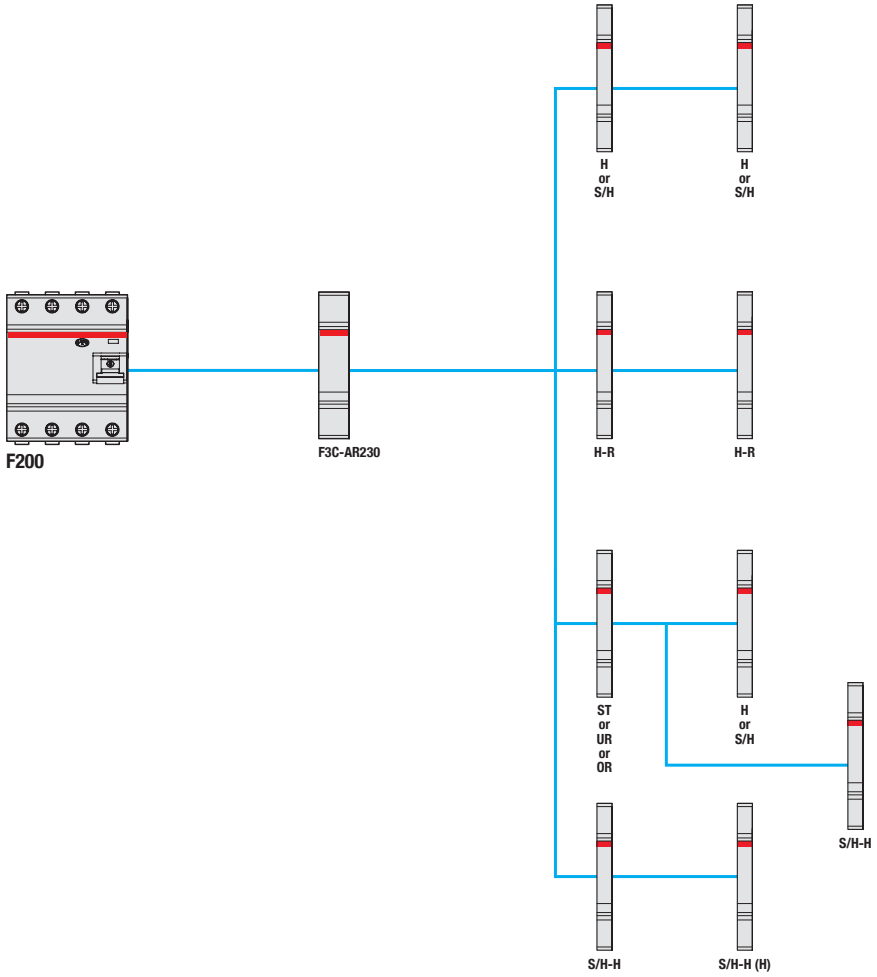

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6-xxR
S/H	Signal / auxiliary contact	S2C-S/H6R
S/H (H)	Signal / auxiliary contact used as auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
ST	Shunt Trip	S3C-A...
OR	Overvoltage release	S2C-OVP
UR	Undervoltage release	S3C-UA
AR	Auto re-closing units	F3C-AR...

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Selection guide

Combination of F200 up to 100A, F200 B type up to 63A and VY (A, S, B type) with Auto reclosing units system check

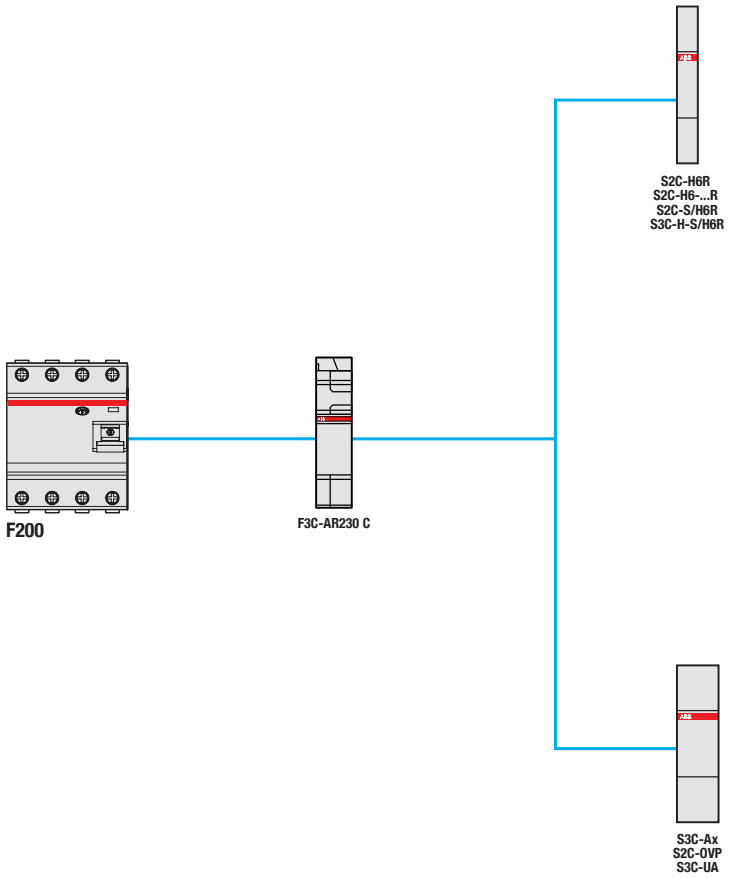

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6-xxR
S/H	Signal / auxiliary contact	S2C-S/H6R
S/H (H)	Signal / auxiliary contact used as auxiliary contact	S2C-S/H6R
S/H-H	Auxiliary contact-Signal contact/ Auxiliary contact 2CO	S3C-H-S/H6R
S/H-H (H)	Auxiliary contact-Signal contact/ Auxiliary contact 2CO (used as auxiliary contact)	S3C-H-S/H6R
ST	Shunt Trip	S3C-A...
OR	Overvoltage release	S2C-OVP
UR	Undervoltage release	S3C-UA
AR	Auto reclosing units with system check	F3C-AR230 C

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Auxiliary and signal contacts

Auxiliary elements

Auxiliary contact and signal/auxiliary contact		
		S2C-S/H6R, S2C-H6R, S2C-H11L, S2C-H20L and S2C-H02L
Suitable for		MCBs S200 series, S300P, M300P, RCDs F200, DS200, DS201, DS202C, DSE201M, AFDDs S-ARC1, DS-ARC1 and Switch disconnectors SD200 With SCC-IH6R: MCBs SN201, S200C, S200TC; RCBOs DS203NC. With DSCC-IH6R: RCBOs DS202CR.
Utilization category		AC14 1A/400V, 2A/230V - DC12 1A/220V, 1,5A/110V - DC13 2A/60V, 4A/24V
Conventional free air thermal current	A	10
Rating according UL1077 /CSA22-3 No. 235*		1A/480VAC, 2A/277VAC, 1.5A/125VDC, 2A/60VDC, 4A/24VDC
Min. operational current/voltage*		10 mA at 12 V; 5 mA at 24 V
Rated conditional short-circuit current	V	230 V AC 1,000 A with S201 K4
Overvoltage category		III
Rated impuls withstand voltage (1.2/50µs)	kV	4
Cross-section of conductors	mm^2	0.75…2.5 (up to 2 x 1.5 mm2 for S2C-H11L, S2C-H20L and S2C-H02L)
Tightening torque	Nm	1.2 (max. 0.8 for S2C-H11L, S2C-H20L and S2C-H02L)
Contact stability in vibration test according to IEC/EN 60 068-2-6		5g, 20 sweep cycles 5…150…5 Hz at 24 V AC/DC, 5 mA automatic reclosing < 10 ms
Mechanical service life		10000 operations
Dimensions (H x D x W)	mm	85 x 69 x 8.8

* Valid only for S2C/H6R, S2C-HR

Auxiliary contact and signal/auxiliary contact		
		S2C-H6-11R, S2C-H6-20R, S2C-H6-02R
Suitable for		MCBs S200 series, S300P, M300P, RCDs F200, DS200, DS201, DS202C, DSE201M, AFDDs S-ARC1, DS-ARC1 and Switch disconnectors SD200 With SCC-IH6R: MCBs SN201, S200C, S200TC; RCBOs DS203NC. With DSCC-IH6R: RCBOs DS202CR.
Utilization category		AC14: 1A/400V, 2A/230V DC12/DC13: 1A/50V, 2A/30V
Conventional free air thermal current	A	10
Min. rated operational current/voltage*		10 mA at 12 V; 5 mA at 24 V
Rated conditional short-circuit current	V	230 V AC 1,000 A with S201 K4
Overvoltage category		III
Rated impuls withstand voltage (1.2/50µs)	kV	4
Cross-section of conductors	mm^2	0.75…2.5
Tightening torque	Nm	1.2
Contact stability in vibration test according to IEC/EN 60068-2-6		5g. 20 sweep cycles 5...150...5 Hz at 24 V AC/DC. 5mA automatic reclosing < 10 ms
Mechanical service life		10000 operations
Ambient temperature	°C	55
Humidity		90%
Dimensions (H x D x W)	mm	85 x 69 x 8.8

* ensures safe contacting without current interruption by pollution layer

Auxiliary contact-Signal contact/Auxiliary contact		
		S3C-H-S/H6R
Suitable for		MCBs S200 series, S300P, M300P, RCDs F200, DS200, DS201, DS202C, DSE201M, AFDDs S-ARC1, DS-ARC1 and Switch disconnectors SD200 With SCC-IH6R: MCBs SN201, S200C, S200TC; RCBOs DS203NC. With DSCC-IH6R: RCBOs DS202CR.
Utilization category		AC14 1A/400V, 2A/230V DC12 1A/220V, 1,5A/110V DC13 2A/60V, 4A/24V Max operation frequency is 60cycles/1min utilization category
Conventional free air thermal current	A	10
Min. operational current/voltage		10 mA at 12 V; 5 mA at 24 V
Rated conditional short-circuit current		230 V AC 1000 A with S201 K4
Ovevoltage category		III
Rated impuls withstand voltage (1.2/50µs)	kV	4
Cross section of conductors	mm^2	0.75...2.5(max 2x1.5mm^2)
Rated tightening torque	Nm	0.8 (Max 1.0Nm)
Contact stability in vibration resistance acc. to IEC/EN 60068-2-6:		Up to 5g, 20 sweep cycles 5…150…5 Hz at 24 V AC/DC, 5 mA automatic reclosing < 10 ms
Mechanical service life		10000 operations
Dimensions(HxDxW)	mm	85x69x8.8

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Auxiliary and signal contacts

S2C-S/H6R

S2C-H6-...

S3C-H-S/H6R

Signal/auxiliary contacts
Signal contacts indicate if a device tripped due to a failure (overcurrent/short-circuit for MCBs and RCBOs; earth fault for RCCBs and RCBOs). Auxiliary contacts indicate the position of the contacts, independent if a failure occurred or the device was operated manually.

S2C-S/H6R: choice through a selector between signal and auxiliary contact.

S2C-H6R and S2C-HxxR: Auxiliary contacts with contact configuration according the following table. All right-side mounted contacts are suitable for MCBs, RCDs, AFDD and switch disconnectors SD200 according the “Selection tables” which are displayed in the beginning of chapter 4.

S2C-HxxL: Auxiliary contacts with contact configuration according the following table. These contacts are left-side mounted and fit to S200 MCBs and switch disconnertors SD200 according the “Selection tables” which are displayed in the beginning of chapter 4. Especially when using a motor operating device this is a possibility to add a contact as the right side mounted ones do not fit within this combination.

S2C-Hxx: Unique bottom-fitting contact for the S200 compact range, DS201 (2019), DSE201M and SD200 switch disconnectors. Simple and space-saving solution. Also intended for retrofitting.

S3C-H-S/H6R: 1CO auxiliary and 1CO signal contact at the same time in half module device for the space saving. Right-side mounted contacts are suitable for MCBs, RCDs, AFDD and switch disconnectors SD200.

Description	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Signal contact/ auxiliary switch 1CO	563819	S2C-S/H6R	2CDS200922R0001		0.04	1
Auxiliary contact 1CO	563826	S2C-H6R	2CDS200912R0001		0.04	1
Auxiliary contact 1NO/1NC	697941	S2C-H6-11R	2CDS200946R0001		0.04	1
Auxiliary contact 2NO	697958	S2C-H6-20R	2CDS200946R0002		0.04	1
Auxiliary contact 2NC	697965	S2C-H6-02R	2CDS200946R0003		0.04	1

Auxiliary contact-Signal contact/Auxiliary contact 2CO

Description	Bbn 6941593	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Auxiliary contact-Signal contact/ Auxiliary contact 2CO	482085	S3C-H-S/H6R	2TAZ940070R0001		0.04	1

Auxiliary contacts mounting on the left side

Description	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Auxiliary contact 1 NO/1NC	648820	S2C-H11L	2CDS200936R0001		0.04	1
Auxiliary contact 2 NO	648837	S2C-H20L	2CDS200936R0002		0.04	1
Auxiliary contact 2 NC	648844	S2C-H02L	2CDS200936R0003		0.04	1

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Auxiliary and signal contacts

S2C-H11 T Aux

Auxiliary contacts ring tongue version

Function: remote reporting of the open or closed state of the switch to which they are coupled in case of voltage application. Applications: rolling stock.

Description		Order details		Weight 1 piece Kg	Pack unit pc.
		Type	Order Code		
To be mounted on the left side	1 NO contact + 1 NC contact	S2C-H11 T Aux	2CSS207033R1119	0,04	1
	2 NC contacts	S2C-H02 T Aux	2CSS207033R1029	0,04	1
	2 NO contacts	S2C-H20 T Aux	2CSS207033R1209	0,04	1

S 2C-H01

Bottom-fitting auxiliary contact		
		S2C-H10 and S2C-H01
Suitable for		MCBs S200 series, S300P, RCDs DS201, DSE201M, AFDDs DS-ARC1 and Switch disconnectors SD200
Conventional free air thermal current	A	7.5
Utilization category		AC14 2A/230V - DC 12 identical DC13 1A /50V, 2A/30V
Min. operational current/voltage*	V	10 mA at 12 V AC/DC
Rated conditional short-circuit current		230 VAC 1000 A, fault protection with S 201-K2 or Z2
Tightening torque	Nm	0.5
Cross-section of conductors	mm^2	0.75 to 2.5
Mechanical service life		4 000 operations
Dimensions (HxDxW)	mm	19 x 17 x 17.5

* ensures safe contacting without current interruption by pollution layer

Bottom-fitting auxiliary contacts for S200 <= 63A, S200 M, S200 P, S300 P, S200 S, SD200, DS201 (2019), DSE201 M, DS-ARC1

Description	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
1 NC	065108	S 2C-H01	2CDS200970R0031		0.01	1
1 NO	065139	S 2C-H10	2CDS200970R0032		0.01	1

packing unit 15 parts						
Description	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
1 NC	065160	S 2C-H01 15x	2CDS200970R0041		0.01	15
1 NO	065191	S 2C-H10 15x	2CDS200970R0042		0.01	15

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Auxiliary and signal contacts

SCC-IH

SCC-S

Suitable for		**DS203NC, SN201, S200C, S200TC, VYC30**
Mounting		Right side (R) / Left side (L)
Dimension	mm	85 x 67.7 x 8.8
Contact function		1 CO
Number of contacts		1 aux or 1 signal
Test button		SCC-IH6R: no; SCC-S6R: yes
Conventional free air thermal current Ith	A	10
Minimum operational current / voltage		10mA at 12V AC/DC
		5mA at 24V AC/DC
Rated short circuit capacity		230V AC 1000A with SN201 C6 415V AC 1000A with S200C C4 230/ 415V AC 1000A with Fuse 10 A gG
Rated insulation voltage Ui	V	415 V
Rated impulse withstand voltage Uimp	kV	6
Pollution degree		3
Overvoltage category		III
Cross-section of conductors	mm^2	0.75...2.5
		2 x 1.5
Tightening torque	Nm	max 1.0
Vibration resistance		IEC 60068-2-6 5g, 20 cycles 5...150...5Hz at 24V AC/DC, 5mA short-term interruption <10ms
Mechanical endurance		6050 switching cycles
Operation ambient temperature	°C	-25...+55
Storage temperature	°C	-40...+70
Standards		IEC 60947-5-1 GB14048.5
Utilization categories according to IEC 60947-5-1		AC14, 415/ 400 V, 3A AC14, 240/ 230 V, 6A DC12, 220V, 1A DC12, 110V, 1.5A DC13, 60V, 1,5A DC13, 24V, 4A

Description	**Bbn 4053546**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
Adaptor / Auxiliary Contact 1CO	117196	SCC-IH6R	2CDS200933R0002		0.032	1
Signal Contact 1CO	117219	SCC-S6R	2CDS200933R0004		0.032	1
Adaptor / Auxiliary contact 1CO	117073	SCC-IH6L	2CDS200933R0001		0,032	1
Signal Contact 1CO	117103	SCC-S6L	2CDS200933R0003		0,032	1

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Auxiliary and signal contacts

DSCC-IH6R

DSCC-S6R

Suitable for		**DS202CR, DSE201NS , DSN201E**
Mounting		right side
Dimension	mm	85 x 67.7 x 8.8
Contact function		1 CO
Number of contacts		1 aux or 1 signal
Test button		DSCC-IH6R: no; DSCC-S6R: yes
Conventional free air thermal current Ith	A	10
Minimum operational current / voltage		10mA at 12V AC/DC
		5mA at 24V AC/DC
Rated short circuit capacity		230/ 415V AC 1000A with Fuse 10 A gG
Rated insulation voltage Ui	V	415 V
Rated impulse withstand voltage Uimp	kV	6
Pollution degree		3
Overvoltage category		III
Cross-section of conductors	mm^2	0.75...2.5
		2 x 1.5
Tightening torque	Nm	max 1.0
Vibration resistance		IEC 60068-2-6 5g, 20 cycles 5...150...5Hz at 24V AC/DC, 5mA short-term interruption <10ms
Mechanical endurance		6050 switching cycles
Operation ambient temperature	°C	-25...+55
Storage temperature	°C	-40...+70
Standards		IEC 60947-5-1 GB14048.5
Utilization categories according to IEC 60947-5-1		AC14, 415/ 400 V, 3A AC14, 240/ 230 V, 6A DC12, 220V, 1A DC12, 110V, 1.5A DC13, 60V, 1,5A DC13, 24V, 4A

Description	**Bbn 4053546**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
Adaptor / Auxiliary contact 1CO	160611	DSCC-IH6R	2CDS200933R0012		0,032	1
Signal Contact 1CO	160734	DSCC-S6R	2CDS200933R0013		0,032	1

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Auxiliary and signal contacts

F2-125A-B-S/H

Signal and auxiliary contacts for F200 125A and F200 B 80-100 A			
			F2 125A-S/H
Rated current	AC	A	6
	DC	A	1
Min. rated voltage Ub min	AC	V	230
	DC	V	110
Connection cross section		mm^2	1...1.5
Tightening torque		Nm	0.8
Dimensions (H x D x W)		mm	85 x 69 x 8.8

Auxiliary/Signal contact for F200 125A and F200 B 80-100 A

Function: choice through a selector between indication of the position of the device's contacts and signalling of the earth fault. Suitable for RCCBs F200 125A and F200 B 80-100 A series

Description	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Auxiliary/Signal contact 1CO+1NC	600527	F2-125A-B-S/H	2CSF200922R0001		0.04	1

Clamping cover for F200 125A-F200 B type

Description	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	999638	CPV B	2CSF200988R0001			1

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Shunt trip

S3C-A1

Shunt trip for MCBs, RCDs, AFDDs and Switch Disconnectors										
			S3C-A1							
Rated voltage	AC	V	12...110							
	DC	V	12...110							
Max release duration		ms	<10 @ Rated voltage							
Min. release voltage	AC	V	8.4							
	DC	V	10							
Power consumption	Ub	V	12 V DC	12 V AC	24 V DC	24 V AC	60 V DC	60 V AC	110 V DC	110 V AC
	Ib_{max}/A	A	2.8	3.3	5.3	6.2	14	15	25.3	25
Coil resistance		Ω	4							
Tightening torque		Nm	0.8							
Dimensions (H x D x W)		mm	85 x 74.1 x 17.4							
Standards:			UL1077							
Operating temperature			-25°C...+55°C							
Storage temperature			-40°C...+70°C							
Cross-section of conductors			0,75mm²...2.5mm², 2 wires max. 2x1,5mm²							
Stripping length of cable			7...8mm							
			S3C-A2							
Rated voltage	AC	V	110...415							
	DC	V	110...250							
Max release duration		ms	<10 @ Rated voltage							
Min. release voltage	AC	V	77.0							
	DC	V	77.0							
Power consumption	Ub	V	110 V DC	110 V AC	220 V DC	230 V AC	250 V DC	415 V AC		
	Ib_{max}/A	A	0.5	0.7	1.1	1.5	1.2	2.5		
Coil resistance		Ω	210							
Tightening torque		Nm	0.8							
Dimensions (H x D x W)		mm	85 x 74.1 x 17.4							
Standards:			UL1077							
Operating temperature			-25°C...+55°C							
Storage temperature			-40°C...+70°C							
Cross-section of conductors			0,75mm²...2.5mm², 2 wires max. 2x1,5mm²							
Stripping length of cable			7...8mm							

Shunt trips

Function: remote opening of the device when a voltage is applied. Suitable for MCBs S200 series, S300P series, RCCBs F200 series, RCBOs DS201, DSE201 M, AFDD S-ARC1, DS-ARC1 series, SD200 switch disconnectors series. It can be used with MCBs SN201, S200C and RCBOs DS203NC series by means of SCC-IH6R interface module; it can be used with RCBOs DS202CR by means of DSCC-IH6R interface module.

Shunt trips use a coil like MCBs for tripping. To trip a shunt it is necessary to choose the right voltage and make sure the corresponding Ibmax (as mentioned in the table above) is provided by the power supply used. If the power supply can provide higher currents the shunt trip will reduce the current to Ibmax due to its internal resistance.

As soon as the shunt tripped, the contact inside is open – the electrical circuit is disconnected even if the shunt trip is still powered on. The free-tripping mechanism of the shunt trip allows a restart of the main protection device only after the shunt trip gets no external release signal anymore.

Rated voltage	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
AC/DC 12...110 V	116625	S3C-A1	2CDS200982R0001		0.06	1
AC 110...415 V/DC110...250 V	116663	S3C-A2	2CDS200982R0002		0.06	1

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Shunt trip

S3C-A1L

Shunt trip for S200 and S300P MCBs										
			S3C-A1L							
Rated voltage	AC	V	12...110							
	DC	V	12...110							
Max release duration		ms	<10 @ Rated voltage							
Min. release conditions	AC		8.4 V / 2.1 A							
	DC		10 V / 2.5 A							
Power consumption	Ub	V	12 V DC	12 V AC	24 V DC	24 V AC	60 V DC	60 V AC	110 V DC	110 V AC
	Ib_{max}/A	A	2.8	3.3	5.3	6.2	14	15	25.3	25
Coil resistance		Ω	4							
Tightening torque		Nm	0.8							
Dimensions (H x D x W)		mm	85 x 74.1 x 17.4							
Standards:			UL1077							
Operating temperature			-25°C...+55°C							
Storage temperature			-40°C...+70°C							
Cross-section of conductors			0,75mm²...2.5mm², 2 wires max. 2x1,5mm²							
Stripping length of cable			7...8mm							
			S3C-A2L							
Rated voltage	AC	V	110...415							
	DC	V	110...250							
Max release duration		ms	<10 @ Rated voltage							
Min. release conditions	AC		77 V / 0.4 A							
	DC		77 V / 0.4 A							
Power consumption	Ub	V	110 V DC	110 V AC	220 V DC	230 V AC	250 V DC	415 V AC		
	Ib_{max}/A	A	0.5	0.7	1.1	1.5	1.2	2.5		
Coil resistance		Ω	210							
Tightening torque		Nm	0.8							
Dimensions (H x D x W)		mm	85 x 74.1 x 17.4							
Standards:			UL1077							
Operating temperature			-25°C...+55°C							
Storage temperature			-40°C...+70°C							
Cross-section of conductors			0,75mm²...2.5mm², 2 wires max. 2x1,5mm²							
Stripping length of cable			7...8mm							

Function: remote opening of the device when a voltage is applied.
Suitable for MCBs S200 series, S300P series.

Rated voltage	**Bbn 4053546**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
AC/DC 12...110V	116700	S3C-A1L	2CDS200981R0001		0.06	1
AC 110...415V / DC 110...250V	116748	S3C-A2L	2CDS200981R0002		0.06	1

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Undervoltage release

S3C-UA

Undervoltage release								
			S3C-UA 12 DC/AC	S3C-UA 24 DC/AC	S3C-UA 48 DC/AC	S3C-UA 110 DC/AC	S3C-UA 230 DC/AC	S3C-UA 230D DC/AC
Standards			IEC/EN 60947-1					
Conducted Emissions			Compliant to CISPR 11 - Class A					
Rated voltage	AC/DC	V	12	24	48	110	230	230
Delayer								≥ 200 ms
Frequency		Hz	50...60					
Release trip		V	0.35 U_n ≥ V ≥ 0.7 U_n					
Terminals		mm^2	1 wire from	0.75 mm^2 to	2.5 mm^2 or	2 wires up to each		1.5 mm^2
Consumption		VA	DC: 0.93 AC: 1.55	DC: 1.3 AC: 2.07	DC: 1.41 AC: 2.27	DC: 0.94 AC: 1.73	DC: 1.3 AC: 2.50	DC: 1.5 AC: 2.40
Resistance to corrosion		°C/RH	constant atmosphere: 23/83 - 40/93 - 55/20; variable atmosphere: 25/95 - 40/93					
Protection degree			IPXXB/IP2X					
Tightening torque		Nm	0.8					
Dimensions (H x D x W)		mm	85 x 71.1 x 17.4					
Position of use			any					

Undervoltage releases

Function: protection of the load in the event of a voltage drop (between 70% and 35% of its rated value); positive safety (device's tripping when the voltage is disconnected) emergency stop by means of a button. S3C-UA 230D version will trip the main protection device after waiting around 200 ms from the first voltage drop detection.

Led function implemented to show if an undervoltage drop occured. Suitable for MCBs S200 series, RCCBs F200 series and RCBOs DS202C, DSE201M, DS200 series, DS200 switch disconnectors series. It can be used with MCBs SN201, S200C, S200TC and RCBOs DS203NC series by means of SCC-IH6R interface module; it can be used with RCBOs DS202CR by means of DSCC-IH6R interface module.

When S3C-UA is combined to a main device with an interface module or a MOD/AR unit it allows only one auxiliary or signal contact mounted after it.

Rated voltage	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
12	159318	S3C-UA 12 DC/AC	2CDS200985R0041		0,09	1
24	159356	S3C-UA 24 DC/AC	2CDS200985R0042		0,09	1
48	159394	S3C-UA 48 DC/AC	2CDS200985R0043		0,09	1
110	159431	S3C-UA 110 DC/AC	2CDS200985R0044		0,09	1
230	159479	S3C-UA 230 DC/AC	2CDS200985R0045		0,09	1
230	159554	S3C-UA 230D DC/AC	2CDS200985R0047		0,09	1

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Overvoltage release

S2C-OVP

Overvoltage release				
			S2C - OVP2	**S2C - OVP1**
Suitable for			MCBs S200 series, S300P, M300P, RCDs F200, DS200, DS201, DS202C, DSE201M, AFDDs S-ARC1, DS-ARC1 and Switch disconnectors SD200 With SCC-IH6R: MCBs SN201, S200C; RCBOs DS203NC. With DSCC-IH6R: RCBOs DS202CR.	
Rated voltage		VAC	230	
Rated frequency		Hz	50	
Max non-tripping voltage AC		V	253	
Max tripping voltage AC		V	290	275
Tripping time	@ 290V AC	s	t<1	
	@ 380V AC	s	t<0.1	
Peak current	@ 315V AC	A	1	
	@ 440V AC	A	1.8	
Max duration of impulse command		ms	7	
Operating temperature		°C	-5....+40	

Overvoltage release

Function: monitoring voltage between the neutral and phase; when an overvoltage reaches the threshold value, the OVP device causes the tripping of the associated MCB or RCCB.
Suitable for MCBs of the S200 series up to 63 A, and RCCBs of the F200 series up to 100 A and RCBOs DS201, DS201 (2019), DS202C, DSE201M, AFDD S-ARC1 series,
Suitable for SD200 switch disconnectors series. It can be used with MCBs SN201, S200C and RCBOs, DS203NC by means of interface module SCC-IH6R.
It can be used with RCBO DS202CR by means of interface module DSCC-IH6R.

Description	**Bbn 8012542**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
Overvoltage release (max tripping voltage AC: 275V)	748137	S2C-OVP1	2CSS200910R0005		0.100	1/5
Overvoltage release (max tripping voltage AC: 290V)	952039	S2C-OVP2	2CSS200993R0005		0.100	1/5

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Auxiliary and signal contacts for UL applications

S2C-S6R U

S2C-H6R U

Auxiliary contact and signal contact		
		S2C-H6RU, S2C-S6RU
Suitable for		S200 U, S200 UP, S200 UDC
Rating according UL 489 / CSA22-2 No.5		1A / 480 VAC 2A / 277 VAC 1.5 A / 125 VDC 2A / 60 VDC 4 A / 24 VDC
Conventional free air thermal current	A	10
Min. operational current/voltage*		10 mA at 12 V; 5 mA at 24 V
Rated conditional short-circuit current	V	230 V AC 1,000 A with S201 K4
Overvoltage category		III
Rated impuls withstand voltage (1.2/50µs)	kV	4
Cross section of conductors	mm^2	0.75…2.5
Tightening torque	Nm	1.2
Contact stability in vibration test according to IEC/EN60068-2-6		5g, 20 sweep cycles 5…150…5 Hz according to DIN IEC 68-2-6 at 24 V AC/DC, 5 mA automatic reclosing < 10 ms
Mechanical service life		10000 operations
Dimensions (H x D x W)	mm	100 x 69 x 8.8

* ensures safe contacting without current interruption by pollution layer.

Auxiliary contact						
Description	**Bbn 4016779**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
only for range U/UP/UDC	615617	S2C-H6R U	2CDS200914R0001		0.035	1

Signal contact						
Description	**Bbn 4016779**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
only for range U/UP/UDC	615624	S2C-S6R U	2CDS200924R0001		0.035	1

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Shunt trip for UL applications

S2C-A1 U

Shunt trip								
			S2C-A1 U					
Suitable for			S200 U, S200 UP, S200 UDC					
Rated voltage	AC	V	12…60					
	DC	V	12…60					
Max release duration		ms	<10					
Min. release voltage	AC	V	8.4					
	DC	V	10					
Power consumption	Ub	V	12 VDC	12 VAC	24 VDC	24 VAC	60 VDC	60 VAC
	Ib_{max}/A	A	3.4	3.4	6.5	6.5	16.5	16.5
Coil resistance		Ω	3.7					
Terminals			Fale-safe bi-directional cylinder-lift-terminal					
Tightening torque		Nm	2.8					
Dimensions (H x D x W)		mm	111 x 69 x17.5					
			S2C-A2 U					
Rated voltage	AC	V	110…415					
	DC	V	110…250					
Max release duration		ms	<10					
Min. release voltage	AC	V	8.4					
	DC	V	10.0					
Power consumption	Ub	V	110 VDC	110 VAC	220 VDC	230 VAC	415 VAC	
	Ib_{max}/A	A	0.5	0.5	1.1	1.1	2.1	
Coil resistance		Ω	225					
Terminals			Fale-safe bi-directional cylinder-lift-terminal					
Tightening torque		Nm	2.8					
Dimensions (H x D x W)		mm	111 x 69 x 17.5					

Shunt trip						
Description	**Bbn 4016779**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
12 - 60 V AC/DC	64472 3	S2C-A1 U	2CDS200908R0001		0.15	1
110-415 V AC,110-250V DC	64473 0	S2C-A2 U	2CDS200908R0002		0.15	1

Auxiliary elements and accessories for MCBs and RCDs

Shunt trip for S200 and S300 P series

S2C-A

Shunt trip for S200 MCBs								
			S2C-A1T, S2C-A1T L, S2C-A1, S2C-A1 L					
Rated voltage	AC	V	12...110					
	DC	V	12....110					
Max release duration		ms	<10					
Min. release voltage	AC	V	8.4					
	DC	V	10					
Power consumption	Ub	V	12 DC	12 AC	24 DC	24 AC	60 DC	60 AC
	Ib max	A	2.7	2.4	5.1	4.4	14.2	5.8
Coil resistance		Ω	3.7					
Terminals			Fail safe bi-directional cylinder-lift-terminal (For T version)					
Tightening torque		Nm	2.8					
Dimensions (H x D x W)		mm	85 x 69 x 17.5					
			S2C-A1T, S2C-A1T L, S2C-A1, S2C-A1 L					
Rated voltage	AC	V	110...415					
	DC	V	110...250					
Max release duration		ms	<10					
Min. release voltage	AC	V	77					
	DC	V	77					
Power consumption	Ub	V	110 DC	110 AC	220 DC	230 AC	415 AC	
	Ib max	A	0.5	0.45	1	0.85	2	
Coil resistance		Ω	225					
Terminals			Fail safe bi-directional cylinder-lift-terminal (For T version)					
Tightening torque		Nm	2.8					
Dimensions (H x D x W)		mm	85 x 69 x 17.5					

Shunt trip ring tongue

S2C-A1

Description		Order details		Weight 1 piece	Pack unit
		Type	Order Code	Kg	pc.
To be mounted on the right side	12 VAC to 110 VAC/ 12 VDC to 110 VDC	S2C-A1	2CDS200909R0001	0,15	1
		S2C-A1T	2CDS200949R0001		
To be mounted on the left side		S2C-A1L	2CDS200907R0001		
		S2C-A1TL	2CDS200947R0001		
To be mounted on the right side	12 VAC to 415 VAC/ 110 VDC to 250 VDC	S2C-A2	2CDS200909R0002	0,15	1
		S2C-A2T	2CDS200947R0002		
To be mounted on the left side		S2C-A2L	2CDS200907R0002		
		S2C-A2TL	2CDS200949R0002		

Auxiliary elements for MCBs, RCDs, AFDDs and Switch Disconnectors

Mechanical accessories

S2C-TC20 U

IP20 Terminal cover						
Description	**Bbn 4016779**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
Only for range U/UP/UDC	877565	S2C-TC20 U	2CDS200917R0001		0.0002	20

Mechanical tripping device

Function: it causes the automatic tripping of the circuit-breakers which it is associated to, when the panel or the door of the electrical switchboard are opened or removed.
Suitable for MCBs S 200 series (on both sides of the devices) and for DS 200 (only on the right side, because on the left side there's RCD-block DDA 200). Suitable for SD 200 switch disconnectors series.

S2C-BP

Description	**Bbn 8012542**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
Mechanical tripping device	941309	S2C-BP	2CSS200998R0001		0.048	1

Plug-in base

Function: it is possible to transform a standard circuit-breaker of the S 200 and F 200 range in a plug-in device which can be pulled out of the circuit where it is installed in one operation. Suitable for MCBs S 200 series and for RCCBs F 200 series up to 63 A and RCBOs DS201, DS202C and AFDD S-ARC1 series.

S2C-EST

Description	**Bbn 8012542**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
Plug-in base	940708	S2C-EST	2CSS200999R0001		0.115	1

S2C-Nt

Hand operated neutral left side mounted		
		S2C-Nt
Suitable for		MCBs S200 series, S300P and Switch disconnectors SD200
Rated current	A	max. 40
Terminal	mm^2	10; cage terminal
Tightening torque	Nm	1.2
Dimensions (H x D x W)	mm	85 x 69 x 8.8

Hand operated neutral

The hand operated neutral has to be mounted to the left side of the MCB or switch disconnector and be snaped on the DIN rail. It is used for measuring duties where the neutral conductor must be in the open position. Due to the special design of the handle - when switching ON the MCB – the neutral will make before the MCB is closed.
The S2C - Nt is not to switch with a tool (screw driver).

Description	**Bbn 4016779**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
Max 40A	647625	S2C-Nt	2CDS200918R0001		0.06	1

Motor operating and autoreclosing devices for MCBs, RCDs and Switch Disconnectors

Motor Operator - S3C-MOD series

S3C-MOD

	S3C-MOD24**	S3C-MOD230
Suitable for:	MCBs S200 and S300 series RCCBs F200 (up to 100A) and F200 B type (up to 63A) RCBOs DS201 Switch Disconnectors SD200	
Number of modules	1	
Operating voltage	24…48 V AC/DC -10% +10%	230-240 V AC -15% +10%
Minimum operating voltage	21.6 V AC/DC	110 V AC
Power consumption during operation	<28 VA	<30 VA
Power consumption at rest	<1 VA	<1.5 VA
Closing time	<1 s	
Opening time	<1 s	
Mechanical endurance	10000	
Protecion degree acc. To EN 60529	IP40 (housing)/IP20 (terminals)	
Operating temperature (with daily average ≤ +35 °C)	-25 …+60 °C	
Storage temperature	-40 …+70 °C	
Overvoltage category	III	
Standard	IEC63024 EN 63024	
Pollution degree acc. to EN 60664	2	
Shock resistance acc. to IEC/EN 60068-2-27	25g, 2 shocks, 13ms	
Vibration resistance acc. to IEC/EN 60068-2-6	1g - 20 cycle at 5… 150 …5 Hz	
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	28 cycles with 55°C/90-96% and 25°C/95-100%	
Terminal type	plug-in	
Cross-section of conductors	0.2…2.5 mm^2	
Tightening torque	0.4 Nm	
Stripping length of the cable	5 mm	
Cable length of the control circuits	10 m	
Remote control: close contact*	Terminal 6	
Remote control: open contact	Terminal 5	
Auxiliary contact	Terminal 4	
Signal contact	Terminal 3	

* In case of MCB trip the remote control inputs are inhibited

** Coupling with S204 or SD204 allowed only in case of DC supply

Motor operating and autoreclosing devices for MCBs, RCDs and Switch Disconnectors

Auto-Reclosing unit - F3C-AR series

F3C-AR

	F3C-AR24	F3C-AR230	F3C-AR230 D
Suitable for:	RCCBs F200 (up to 100A) and F200 B type (up to 63A)		
Number of modules	1		
Supply voltage	24…48 V AC/DC -10% +10%	230-240 V AC -15% +10%	230-240 V AC -15% +10%
Minimum operating voltage	21.6 V AC/DC	110 V AC	110 V AC
Number of automatic reclosing attempts	3		
Waiting time between auto-reset attempts	3 s	3 s	30 s
Power consumption during operation	<25 VA	<30 VA	<30 VA
Power consumption at rest	<1 VA	<1.5 VA	<1.5 VA
Closing time	<1 s		
Opening time	<1 s		
Mechanical endurance	15000		
Protecion degree acc. To EN 60529	IP40 (housing)/IP20 (terminals)		
Operating temperature (with daily average ≤ +35 °C)	-25 …+60 °C		
Storage temperature	-40 …+70 °C		
Overvoltage category	III		
Standard	IEC63024 EN 63024		
Pollution degree acc. to EN 60664	2		
Shock resistance acc. to IEC/EN 60068-2-27	25g, 2 shocks, 13ms		
Vibration resistance acc. to IEC/EN 60068-2-6	1g - 20 cycle at 5… 150 …5 Hz		
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	28 cycles with 55°C/90-96% and 25°C/95-100%		
Terminal type	plug-in		
Cross-section of conductors	0.2…2.5 mm^2		
Tightening torque	0.4 Nm		
Stripping length of the cable	5 mm		
Cable length of the control circuits	10 m		
Remote control: close contact	Terminal 6		
Remote control: open contact	Terminal 5		
Auxiliary contact	Terminal 4		
Alarm contact	Terminal 3		

Motor operating and autoreclosing devices for MCBs, RCDs and Switch Disconnectors

Autoreclosing unit - F3C-AR230 C Series

F3C-AR230 C

	F3C-AR230 C 2/30	F3C-AR230 C 2/300	F3C-AR230 C 4/30	F3C-AR230 C 4/300
Suitable for:	2P, 230 V, 30 mA	RCCBs F200 (up to 100A), F200 B type (up to 63A) and VY (A, S, B type) 2P, 230 V, 300 mA	4P, 400 V (L-L), 30 mA	4P, 400 V (L-L), 300 mA
Number of modules	1.5			
Operating voltage	230-240 V AC (-15% +10%)			
Automatic reclosure after untimely tripping	Yes (up to 24 hours after the fault) System check: 1st time: ≈ 3 seconds 2nd time: ≈ 2 minutes 3rd time: ≈ 5 minutes 4th time to 48th time: ≈ 30 minutes			
Rd0 (rated non operating resistance between live parts and earth)	8 kΩ	800Ω	8 kΩ	800Ω
Rd (rated operating resistance between live parts and earth)	22 kΩ	8 kΩ	22 kΩ	8 kΩ
Earthing system	TT-TN			
Standard	IEC63024 EN 63024			
Mechanical Endurance	5000			
Earth leakage check	Yes			
Max number of consecutive automatic reclosure attempts	48			
Reset time for counter of automatic reclosing attempts	45s			
Power consumption during operation	<26 VA			
Power consumption at rest	<1.5 VA			
Closing time	<1 s			
Opening time	<1 s			
Protection degree acc. to EN 60529	IP40 (housing)/IP20 (terminals)			
Operating temperature	-25 ...+60 °C			
Storage temperature	-40 ...+70 °C			
Overvoltage category	III			
Pollution degree acc. to EN 60664	2			
Shock resistance acc. to IEC/EN 60068-2-27	25g, 2shocks, 13ms			
Vibration resistance acc. to IEC/EN 60068-2-6	1g - 20 cycle at 5... 150 ...5 Hz			
Environmental conditions (damp heat) acc. to IEC/ EN 60068-2-30	28 cycles with 55°C/90-96% and 25°C/95-100%			
Terminal type	plug-in			
Cross-section of conductors	0.2...2.5 mm^2			
Tightening torque	0.4 Nm			
Stripping length of the cable	5 mm			
Locked state	Terminal 3			

Motor operating and autoreclosing devices for MCBs, RCDs and Switch Disconnectors

Autoreclosing unit - F3C-AR230 C H Series

F3C-AR230 C H

	F3C-AR230 C 2/30 H	F3C-AR230 C 2/300 H	F3C-AR230 C 4/30 H	F3C-AR230 C 4/300 H
Suitable for:	RCCBs FH200 (up to 63 A, A and AC types)			
	2P, 230 V, 30 mA	2P, 230 V, 300 mA	4P, 400 V (L-L), 30 mA	4P, 400 V (L-L), 300 mA
Number of modules	1,5			
Operating voltage	230-240 V AC (-15% +10%)			
Automatic reclosure after untimely tripping	Yes (up to 24 hours after the fault) System check: 1st time: ≈ 3 seconds 2nd time: ≈ 2 minutes 3rd time: ≈ 5 minutes 4th time to 48th time: ≈ 30 minutes			
Rd0 (rated non operating resistance between live parts and earth)	8 kΩ	800Ω	8 kΩ	800Ω
Rd (rated operating resistance between live parts and earth)	22 kΩ	8 kΩ	22 kΩ	8 kΩ
Earthing system	TT-TN			
Standard	IEC63024 EN 63024			
Mechanical Endurance	5000			
Earth leakage check	Yes			
Max number of consecutive automatic reclosure attempts	48			
Reset time for counter of automatic reclosing attempts	45s			
Power consumption during operation	<26 VA			
Power consumption at rest	<1.5 VA			
Closing time	<1 s			
Opening time	<1 s			
Protection degree acc. to EN 60529	IP40 (housing)/IP20 (terminals)			
Operating temperature	-5 ...+40 °C			
Storage temperature	-40 ...+70 °C			
Overvoltage category	III			
Pollution degree acc. to EN 60664	2			
Shock resistance acc. to IEC/EN 60068-2-27	25g, 2shocks, 13ms			
Vibration resistance acc. to IEC/EN 60068-2-6	1g - 20 cycle at 5... 150 ...5 Hz			
Environmental conditions (damp heat) acc. to IEC/ EN 60068-2-30	28 cycles with 55°C/90-96% and 25°C/95-100%			
Terminal type	plug-in			
Cross-section of conductors	0.2...2.5 mm^2			
Tightening torque	0.4 Nm			
Stripping length of the cable	5 mm			
Locked state	Terminal 3			

Motor operating and autoreclosing devices for MCBs, RCDs and Switch Disconnectors

Communication interfaces for MOD and AR units - e-MOD/AR

eMOD/AR Modbus Communication Module

	Description
Suitable for *	S3C-MOD230 S3C-MOD24 F3C-AR24 F3C-AR230 F3C-AR230 D F3C-AR230 C F3C-AR230C H
Number of modules	Half module
Connection	InSite control unit (SCU200 / SCU200-W) or Third Party Network
Communication Protocol	ModBus RTU
RS485 Cross-section of conductors	
Solid/flexible	0.14 ... 0.15 mm²
Solid	28-16 AWG
Flexible	26-14 AWG
Power loss	<1.0W
Mounting Position	Right for compatible devices
Pluggable accessories	Not allowed
Mounting method	35mm DIN rail (DIN 5022)
Degree of protection	IP40
Maximum number of eMOD/AR units that can be connected to the SCU200	8
Parity	Even (default), Odd, None
Transmission speed (Baud Rate)	2400, 4800, 9600, 19200 (default), 38400, 57600,115200
Dimensions	8.8x85x74 mm
Weight	30 g
Operating temperature	-25 ...+60 °C
Storage temperature	-40 ...+70 °C
Operating altitude	0 ... 2000 m
Standards	EN 61010-1 / IEC 61010-1 / EN IEC 61326-1

* eMOD/AR is compatible with S3C-MOD230, F3C-AR230, F3C-AR230 D produced only after 31/01/2025. The production date of S3C-MOD230, F3C-AR230, F3C-AR230 D is reported on external label on carton package and behind the device (fomat WWYY).

The MOD&AR units, when combined with a communication module, can connect to either the InSite web server or a third-party network.

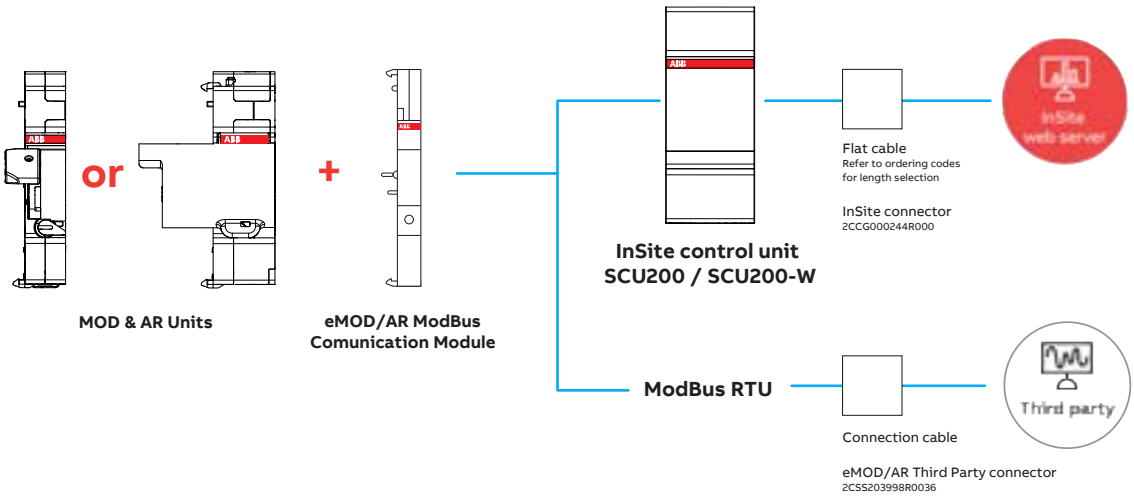

Motor operating and autoreclosing devices for MCBs, RCDs and Switch Disconnectors

Ordering codes

S3C-MOD

S3C-MOD

Description	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Motor Operating Device, 24-48 V AC/DC	539254	S3C-MOD24	2CSS201998R0033		0.100	1
Motor Operating Device, 230-240 V AC	539353	S3C-MOD230	2CSS202998R0033		0.100	1

F3C-AR

F3C-AR230 C

F3C-AR230 C H

F3C-AR, F3C-AR230 C, F3C-AR230 C H

Description	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Auto-Reclosing unit, 24-48 V AC/DC	539452	F3C-AR24	2CSF201998R0034		0.100	1
Auto-Reclosing unit, 230-240 V AC	539551	F3C-AR230	2CSF202998R0034		0.100	1
Autoreclosing unit, 230-240 V AC, with 30s waiting time	539650	F3C-AR230 D	2CSF203998R0034		0.100	1
Autoreclosing unit with system check, 230-240 V AC, for RCCB 2P 30mA	539759	F3C-AR230 C 2/30	2CSF201998R0035		0.130	1
Autoreclosing unit with system check, 230-240 V AC, for RCCB 2P 300mA	539858	F3C-AR230 C 2/300	2CSF202998R0035		0.130	1
Autoreclosing unit with system check, 230-240 V AC, for RCCB 4P 30mA	539957	F3C-AR230 C 4/30	2CSF203998R0035		0.130	1
Autoreclosing unit with system check, 230-240 V AC, for RCCB 4P 300mA	540052	F3C-AR230 C 4/300	2CSF204998R0035		0.130	1
Autoreclosing unit with system check, 230-240 V AC, for FH200 2P 30mA	795650	F3C-AR230 C 2/30 H	2CSF205998R0035		0.130	1
Autoreclosing unit with system check, 230-240 V AC, for FH200 2P 300mA	795759	F3C-AR230 C 2/300 H	2CSF206998R0035		0.130	1
Autoreclosing unit with system check, 230-240 V AC, for FH200 4P 30mA	795858	F3C-AR230 C 4/30 H	2CSF207998R0035		0.130	1
Autoreclosing unit with system check, 230-240 V AC, for FH200 4P 300mA	795957	F3C-AR230 C 4/300 H	2CSF208998R0035		0.130	1

Motor operating and autoreclosing devices for MCBs, RCDs and Switch Disconnectors

Ordering codes

F200 125A RCCB

Motor operating device for F200 125A RCCB

Description	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Motor operating device for F200 125A RCCB	020721	F2-125A-24V-CM4	2CSF200997R1214		0.036	1
Motor operating device for F200 125A RCCB	600626	F2-125A-230V-CM4	2CSF200997R1205		0.036	1

eMOD/AR ModBus

Communication interfaces

Description	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Modbus Interface for MOD/AR ranges	540151	eMOD/AR ModBus	2CSS201998R0036		0.030	1

*** Coming soon**

Accessories for InSite connection

Description	Bbn 7612271	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Flat Cable 2m	519803	INS-102	2CCG001491R0001		17	1
Flat Cable 5m	508111	INS-105	2CCG000243R0001		42.5	1
Flat Cable 10m	519810	INS-110	2CCG001493R0001		89	1
Flat Cable 30m	519827	INS-130	2CCG001494R0001		272	1
InSite Connector	508128	INS-135	2CCG000244R0001		24	35

Third party network

Description	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
COMM Third party Modbus RTU network connector	834151	COMM third party connector	2CSS203998R0036		0.005	1

Notes

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Technical features

			Busbars PS				Busbars BN		Busbars BS9 and F2-S9	Busbars BB
Suitable for			MCB: S200, S200M, S200P, S300 RCD: F200, DDA-blocks Fuseholders E90				RCBO: DS202CR		MCB: SN201	MCB: S200C DSN201E
Electrical Data	Standards		IEC/EN 60947-1						IEC/EN 60947-1: 2007 IEC/EN 61439-1:2011	
	Approvals		—							
	Rated voltage Ue	V	1P, 2P, 3P, 4P: 230/400 V AC/DC				230/400 V		1P: 100 V AC/DC 2P, 3P, 4P: 480 V AC/DC	400 V AC
	Rated frequency	Hz	50 / 60 Hz, DC						50 Hz	
	Current carrying capacity / Phase (35°C ambient temperature)	A		10 mm²	16 mm²	30 mm²	10 mm²	16 mm²		
			End feeding ①	63 A	80 A	120 A	63 A	80 A	63 A	63 A
			Non-end feeding ①	100 A	130 A	160 A	100 A	130 A	100 A	1P: 80 A 2P, 3P, 4P: 100 A
	Short-circuit withstand capacity	kA	25 kA in series with fuse NH3 355 A gG 500 V				25 kA in series with 100 A fuse		1P: 15 kA in series with fuse NH3 250 A gL 500 V 2P, 3P, 4P: 50 kA in series with fuse NH3 250 A gL 500 V	25 kA in series with 100 A gL fuse
Mechanical Data	Housing		light grey, RAL 7035				light grey, RAL 7035		light grey, RAL 7035	light grey, RAL 7035
	Enviromental conditions acc. to		DIN EN 60068				DIN EN 60068		DIN EN 60068	DIN EN 60068
	Overvoltage category		III				III		III	III
	Pollution degree		2				2		2	2
Installation	Cross-Section Busbar		10 mm², 16 mm², 30 mm²				10 mm², 16 mm²		10 mm²	10 mm²
	Mounting position		optional				optional (BS9), dedicated up/down versions (F2-S9)		optional (BS9), dedicated up/down versions (F2-S9)	optional (BS9), dedicated up/down versions (F2-S9)
	Supply		Feed on terminal of the device (supply side optional) or use of feeder terminal range AST; SZ-ESK				Feed on terminal of the device or use of feeder terminal range BR-FS		Feed on terminal of the device or use of feeder terminal range	Feed on terminal of the device or use of feeder terminal range BB-FS

① In case of feed in from the middle of the busbar it needs to be ensured, that the sum of junction currents per side must not exceed the max busbar current Is/phase. Irrespective of the current carrying capacity (Is) of the busbar, the max. rated current of the devices terminal may not be exceeded.

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Technical features

Busbars PSc	Busbars PS...CB	Busbars PS...BP	Busbars PS...BP-C	Busbars PS...BP-CR	Busbars PS..DC	Busbars BHY
MCB: SN201 RCBO: DS301C	MCB: S200, S200M, S200P, S200MUC, S300 S200MTUC Fuseholders E90	MCB: SU200M, S200UDC, S200U, S200UP	MCB: SU200M, S200UDC, S200U, S200UP	MCB: S200 MR, SU200 MR and ST200 MTR	MCBs, Fuseholders E90	Switch disconnector: E202, SHD202, E204, SHD204 RCBO: DSN201E
IEC/EN 60947-1: 2007 + A1: 2011	IEC/EN 60947-1 UL1077	IEC/EN 60947-1 UL489	IEC/EN 60947-1 UL508	EN 60947-1 / IEC 60947-1:2004 UL508	IEC/EN 60947-1	IEC/EN 61439-1
	UL508	UL489	UL 489		-	
400 V AC/DC	1P: 1000 V AC/DC 2P, 3P: 600 V AC/DC	1P, 2P, 3P: 480 V AC	600 V AC/DC	600 V AC	690 V AC / 1000 V DC	400V
50/60 Hz	50 / 60 Hz	50 / 60 Hz	50 Hz (IEC) / 60 Hz (UL)	50 Hz (IEC) / 60 Hz (UL)	50 / 60 Hz, DC	50/60 Hz, DC
	18 mm² 25 mm²					10 mm² 100 A
63 A (connection cross section 10mm²)	End feeding ① 80 A 100 A	80 A (115A for cubicle size ≥ 30"x30"x10")	End feeding ① 100 A	100 A	End feeding ① 100 A	
100 A (connection cross section 25mm²)	Non-end feeding ① 160 A 200 A		Non-end feeding ① 200 A	200A	Non-end feeding ① 160 A	
	10 kA 3 cycles @ 480 V / 100 kA Fuse Class J 175 A / 18 mm² – 200 A / 25 mm²	10 kA in series with fuse NH3 355 A gG 500 V	10 kA 3 cycles @ 600 V / 140 kA Fuse Class J 200 A	140 kA Fuse Class J 200 A	25 kA/0,1 s, 100 kA in series with fuse NH3 355 A gG	10
light grey, RAL 7035	light grey, RAL 7035	light grey, RAL 7035	light grey, RAL 7035	grey, RAL 7035	light grey, RAL 7035	light grey, RAL 7035
	DIN EN 60068	DIN EN 60068	DIN EN 60068	DIN EN 60068	DIN EN 60068	DIN EN 60068
III	III	III	III	III	III	III
2	2	2	2	2	2	2
10 mm²	18 mm², 25 mm²	16 mm²	25 mm²	25 mm²	30 mm²	10 mm²
Bottom	optional	optional	optional	optional	optional	Bottom
Through RCBO terminal: Maximum wire cross section 10 mm2 (rigid, ferrule, stranded) Through feed-in terminal: Maximum wire cross section 25 mm	Feed on terminal of the device (supply side optional) or use of feeder terminals AST 35/... CB; SZ-ESK SP	Feed on terminal of the device (supply side optional) or use of feeder terminals AST 35/15 BP; SZ-ESK BP	Feed on terminal of the device (supply side optional) or use of feeder terminal AST 35/58 BP-C	Feedin via cable with ring tongue	Feed on terminal of the device (supply side optional) or use of feeder terminal AST 35/18 DC or AST 35/45 DC	Feed on terminal of the device: 16 mm² flexible in terminal 25 mm² rigid in terminal



Feed in from the end of the busbar



Feed in from the middle of the busbar

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Technical features

			Busbars PS	Busbars BN	Busbars BS9 and F2-S9	Busbars BB
Accessories	Shock-protection caps		BSK, SZ-BSK	BR-BS		
	Feeder terminals		range AST, SZ-ESK	BR-FS	FEED-IN	BB-FS
	End caps		range END, PS-END, PSB-END	BB-END	BS9-END	BB-END

			Feeder Terminals AST , SZ-ESK	Feeder terminal BR-FS	Feeder terminal FEED-IN	Feeder terminal BB-FS
Electrical Data	Max. operating voltage	V	690 V AC, 690 V DC	Limited by the busbar system used	690 V AC/ 1500 V DC	Limited by the busbar system used
	Current carrying capacity / phase	A	see below ①	Limited by the busbar system used	80 A	Limited by the busbar system used
	Cross-Section	mm²	SZ-ESK 6 - 35 mm² 100 A	solid/stranded: 6 - 25 mm² with ferrule: 6 - 16 mm²	solid/stranded: 6 - 25 mm² with ferrule: 4 - 16 mm²	solid/stranded: 6 - 25 mm² with ferrule: 6 - 16 mm²
			6 - 50 mm² 125 A			
		mm²	AST 6 - 25 mm² 80 A			
			6 - 50 mm² 125 A			

			Busbars PS	Busbars BR	Busbars BS9 and F2-S9	Busbars BB
Instruction of installation			When cutting the busbar, ensure that the insulation profile exceeds the copper bar by approx. 10 mm on each side. Shock protection only with mounted end caps ensured. For DC applications the required increased clearence and creepage distances needs to be ensured.			

① In case of feed in from the middle of the busbar it needs to be ensured, that the sum of junction currents per side must not exceed the max busbar current Is/phase. Irrespective of the current carrying capacity (Is) of the busbar, the max. rated current of the devices terminal may not be exceeded.

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Technical features

Busbars PSc	Busbars PS...CB	Busbars PS...BP	Busbars PS...BP-C	Busbars PS...BP-CR	Busbars PS..DC	Busbars BHY
BSKc	BSK CB	BSK BP	BSK BP-C	BSK BP-CR	BSK BP-C	BHY-BS
AST 25/27 QS	AST 35/15.. CB; AST 35/38.. CB SZ-ESK SP	AST 35/15 BP SZ-ESK BP	AST 35/58 BP-C		AST 35/18 DC (for use with 1-phase busbar) AST 35/45 DC (for use with 2-phase busbar)	AST 25/30 QI
PSc-END	PS-END SP; PS-END1 SP	-	PS-END 3 BP-C	PS-END 3 BP-C	PS-END0, PS-END3	BHY-End2 BHY-End4

AST 25/27 QS	Feeder Terminals AST... CB and SZ-ESK SP		Feeder Terminals AST 35/15 BP and SZ-ESK BP		Feeder Terminals AST 35/58 BP-C		-	Feeder Terminals AST 35/58 BP-C	
	AST.. CB 1000 V AC/DC; SZ-ESK SP 690 V AC/DC		480 V AC		1000 V AC/DC				
	115 A ①		115 A ①		115 A use 75° wire 95 A use 60° wire				
	SZ-ESK SP	35 mm² / 2AWG flexible with ferrules	SZ-ESK BP	35 mm² / 2AWG flexible with ferrules	AST 35/58 BP-C	28mm² / 2AWG			
		50 mm² / 1AWG solid / stranded		50 mm² / 1AWG solid / stranded					
	AST.. CB	35 mm² / 2AWG flexible with ferrules	AST 35/15 BP	25 mm² / 3AWG flexible with ferrules					
		50 mm² / 1AWG solid / stranded		35 mm² / 2AWG solid / stranded					

Busbars PSc	Busbars PS...CB	Busbars PS...BP	Busbars PS...BP-C	Busbars PS...BP-CR	Busbars PS..DC
	When cutting the busbar, ensure that the installation profile exceeds the copper bar by approx. 10 mm on each side. Shock protection only with mounted end caps ensured.	Cutting of busbar is not permitted.	Shock protection only with mounted end caps ensured. For DC applications the required increased clearence and creepage distances needs to be ensured.		The copper bus has to be cut to a length that is app. 10 mm less than the corresponding length of the plastic busbar housing. Toch-safe only when used with the required end caps. Independant from the rated voltage of the devices like busbars or feeder terminals the creepage distances and distances over the air needs to be considered. This is depending on the particular application as well as on the complete assembling.



Feed in from the end of the busbar



Feed in from the middle of the busbar

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Selection guide

PS 1/...
PS 1/.../16
PS 1/.../30

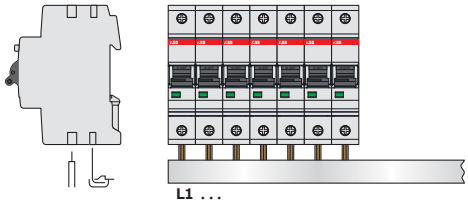

PS 1/29/6

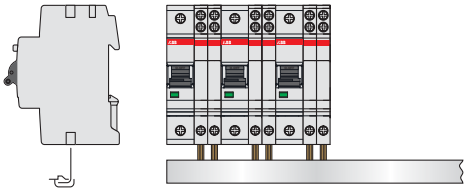

PS 3/...
(2CDL231 ...)

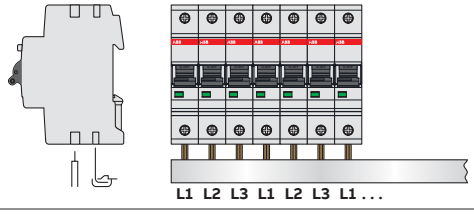

PS 1/38/6

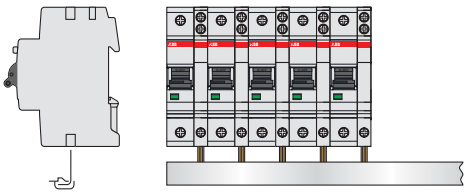

PS 3/39 H
PS 3/39/16 H

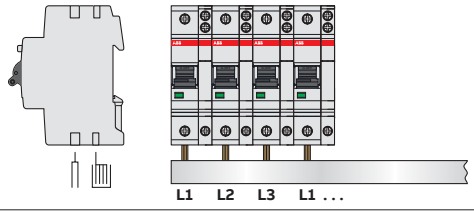

PS 2/12
PS 2/58
PS 2/58/16
PS 2/12 A
PS 2/58/16 A
PS 2/58 SP
PS 2/58/16 SP

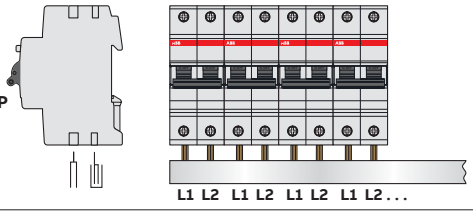

PS 1/38 H
PS 1/38/16 H

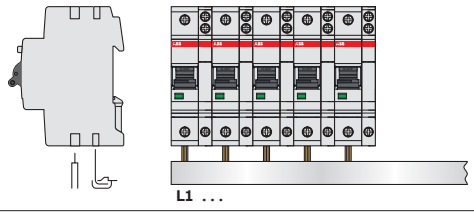

PS 2/48 H
PS 2/48/16 H
PS 2/48/16 HA
PS 2/48/16 SP

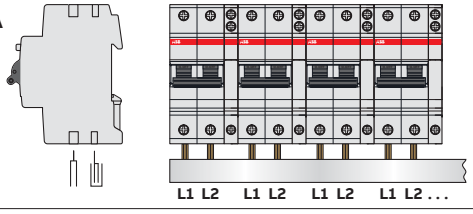

PS 1/38 NT

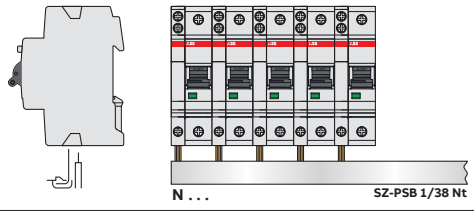

PS 3/46/16 H-IT

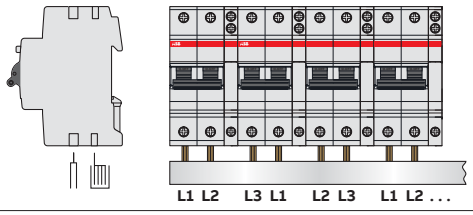

PS
1/23/6

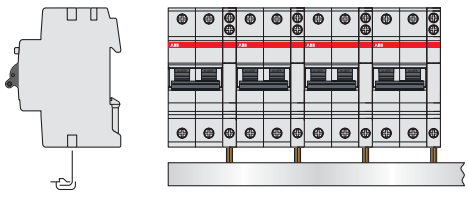

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Selection guide

PS 3/12
PS 3/12 A
PS 3/12/16
PS 3/60
PS 3/60/16
PS 3/60/30
PS 3/60 A
PS 3/60/16 A
PS 3/60 SP
PS 3/60/16 SP

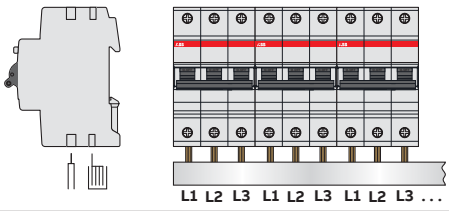

PS 3/48 H
PS 3/48/16 H
PS 3/48/16 HA
PS 3/48/16 SP

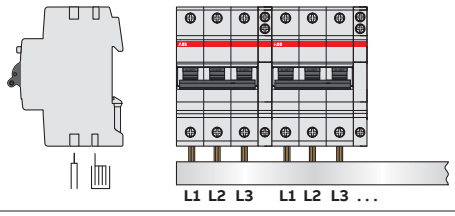

PS 4/12
PS 4/12/16
PS 4/60
PS 4/60/16
PS 4/12 A
PS 4/60/16 A
PS 4/60/16 SP

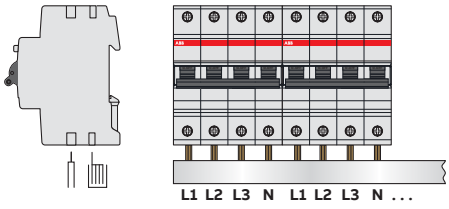

PS 4/52/16 H
PS 4/52/16 HA
PS 4/52/16 SP

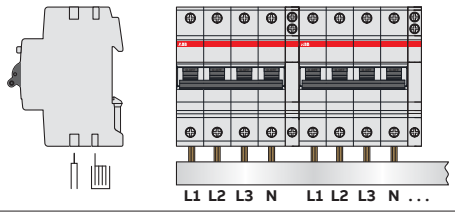

PS 4/12 NA
PS 4/58 N
PS 4/58/16 N
PS 4/58/16 NA
PS 4/58/16 N SP

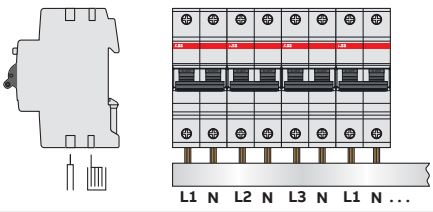

PS 4/48/16
NH A

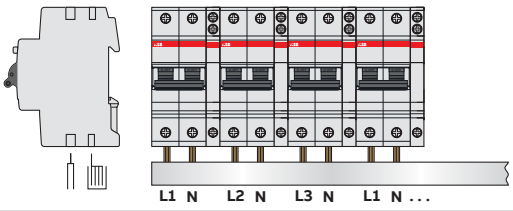

PS 4/58/ NN A
PS 4/58/16 NN A

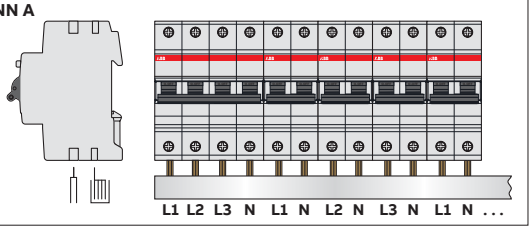

Example for overlap

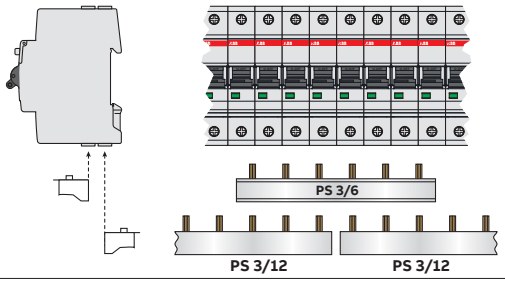

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Selection guide

PS 4/12 NA
PS 4/58 N
PS 4/58/16 N
PS 4/58/16 NA

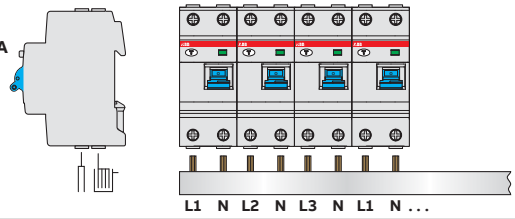

PS 2/12
PS 2/12/16
PS 2/58
PS 2/58/16
PS 2/12 A
PS 2/58/16 A

F 202 + F 202 + ...

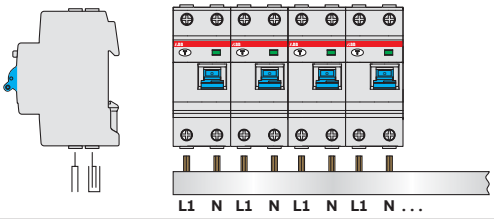

PS 4/48/16 NH A

F 202 + S2C-S/H6R + F 202 + S

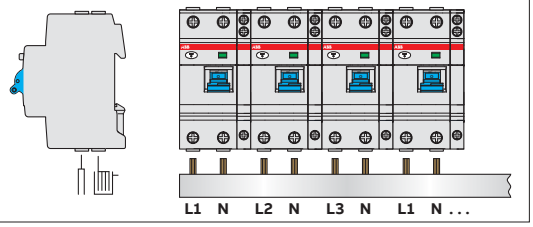

PS 2/48 H
PS 2/48/16 H
PS 2/48/16 HA

F 202 + S2C-S/H6R + F 202 + ...

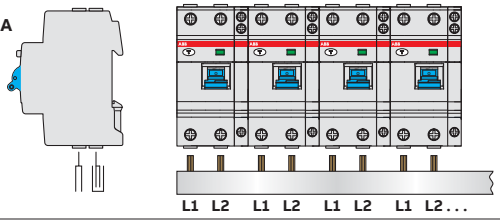

PS 3/12 FI
(2CDL230 ...)
PS 3/9 FI
PS 3/10 FI
PS 3/57 FI

F 204 + S 200 + S 200 + ...

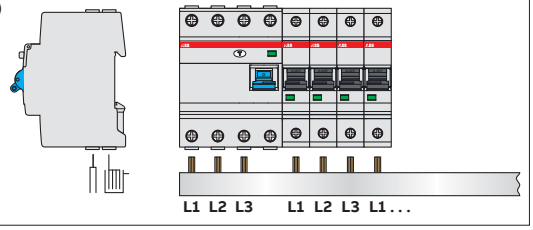

PS 4/12
PS 4/12/16
PS 4/60
PS 4/60/16
PS 4/12 A
PS 4/60/16 A

F 204 + F 204 + ...

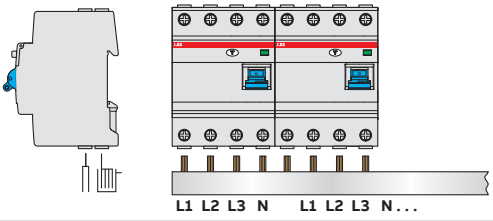

PS 3/12 FI H

F 204 + S2C-S/H6R + S 200 + S 200 ...

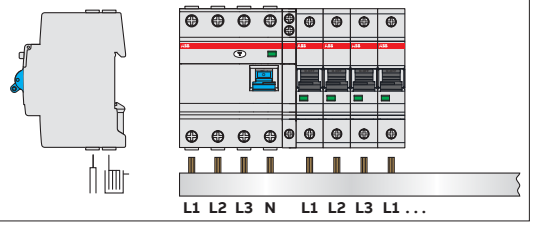

PS 4/52/16 H
PS 4/52/16 HA

F 204 + S2C-S/H6R + ...

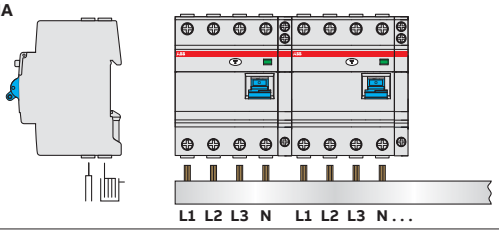

PS 4/58 NN A
PS 4/58/16 NN A

F 204 + F 202 + F 202 + ...

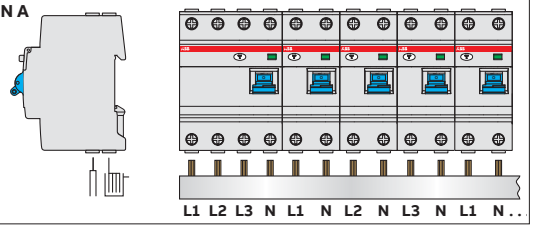

PS 3/11
PS 3/12
PS 3/12 A
PS 3/12/16
PS 3/60
PS 3/60/16
PS 3/60 A
PS 3/60/16 A

F 204 (N links) + S 200 + S 200 ...

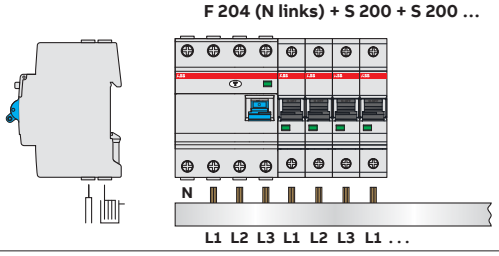

PS 1/3
PS 1/6
PS 1/9
PS 1/60
PS 1/60/16

F 202 + S 201 + S 201 + ...

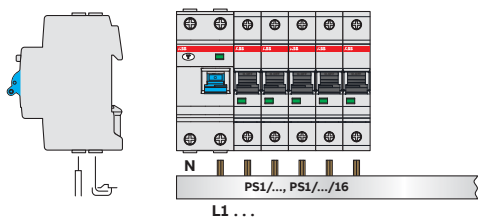

Example for overlapping

1 x F 204 + 20 x S 201

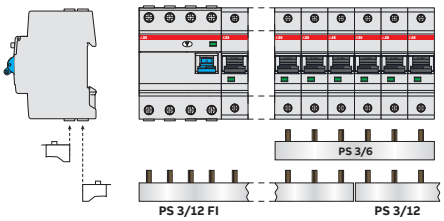

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Selection guide

PS 2/12
PS 2/12 A
PS 2/58
PS 2/58/16
PS 2/58/16 A

DS 201 **DS 201 ...**
DS 202 C **DC 202 C ...**

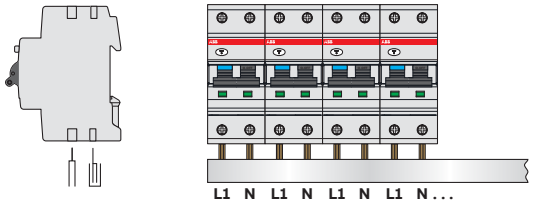

PS 2/48 H
PS 2/48/16 H
PS 2/48/16 HA

DS201 + S2C-S/H6R + DS201 ...
DS202C + S2C-S/H6R + DS202C ...

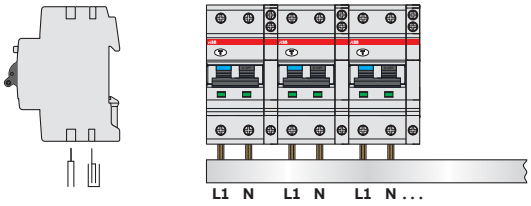

PS 4/12 NA
PS 4/58 N
PS 4/58/16 N
PS 4/58/16 NA

DS 201 **DS 201** **...**
DS 202 C **DC 202 C** **...**

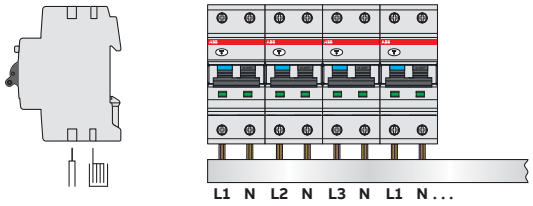

PS 2/48 H
PS 2/48/16 H
PS 2/48/16 HA

DS 201 + S2C-S/H6R + DS 201...
DS 202 + S2C-S/H6R + DS 202 C...

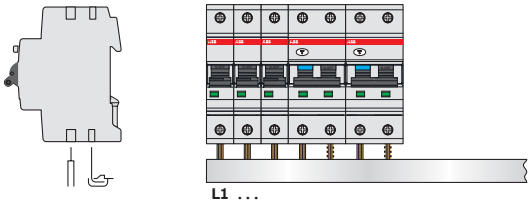

PS 1/12 A
PS 1/60 A
PS 1/60/16 A

S 201 S 201 S 201 DS 201 ...
DS 202 C ...

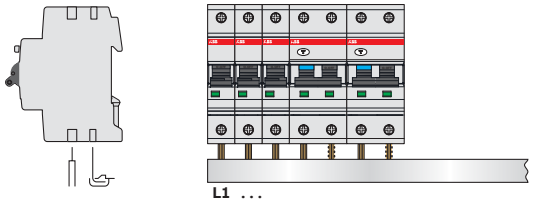

PS 4/48 NHA
PS 4/48/16 NHA

DS 201 + S2C-S/H6R + DS 201 ...
DS 202 + S2C-S/H6R + DS 202 ...

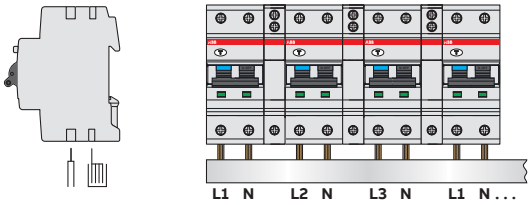

PS 3/12 A
PS 3/60 A
PS 3/60/16 A

S 201 S 201 S 201 DS 201 DS 201 DS 202 C DS 202 C

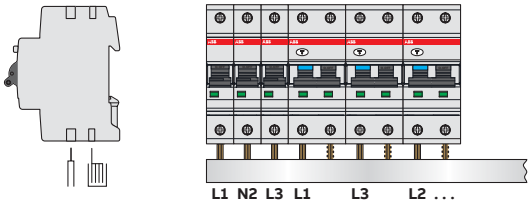

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Selection guide

PS 3/30-DDA 202
PS 3/30/16-DDA 202

DS 202 + DS 202 + (DDA 202 + S 202) + (DDA 202 + S 202) ...

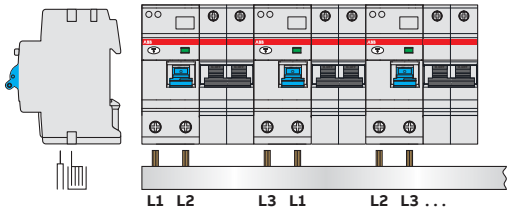

PS 4/30/16N-DDA 202 T

DS 202 + DS 202 + (DDA 202 + S 202) ...

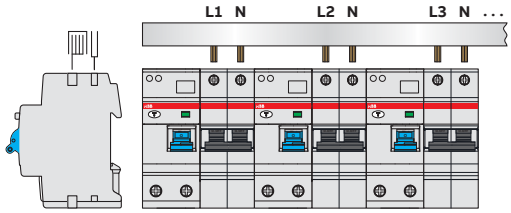

PS 3/26/16H-DDA 202

DS 202 + S2C-S/H6R + DS 202 + S2C-S/H6R + DDA 202 + S 202 + S2C-S/H6R + DDA 202 + S 202 + S2C-S/H6R ...

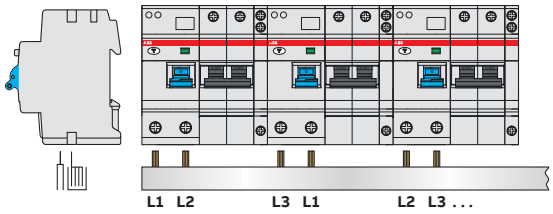

PS 4/30/16NH-DDA 202 T

DS 202 + S2C-S/H6R + DS 202 + S2C-S/H6R + (DDA 202 + S 202) + S2C-S/H6R + (DDA 202 + S 202) + S2C-S/H6R ...

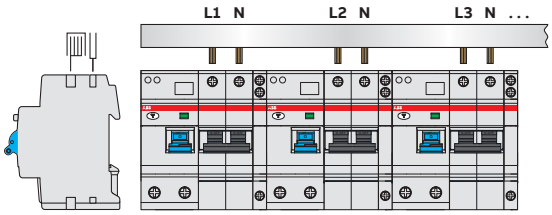

PS 4/32-DDA 204
PS 4/32/16-DDA 204

DS 204 (50/63 A) + (DDA 204 (63 A) + S 204) ...

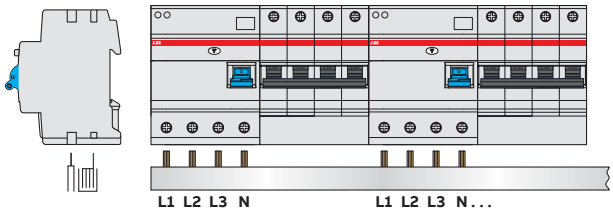

PS 4/40/16-DDA 204 T

DS 204 (m 40 A) + DS 204 (m 40 A) + DDA 204 (m 40 A) + S 204 + DDA 204 (m 40 A) + S 204 ...

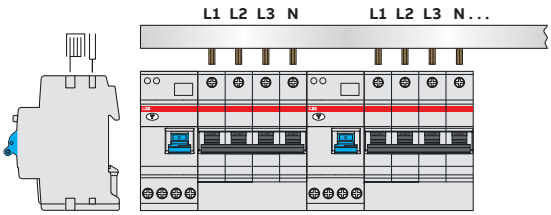

PS 3/30/16-DDA 202 T

DS 202 + DS 202 + DA 202 + S 202 + DDA 202 + S 202 ...

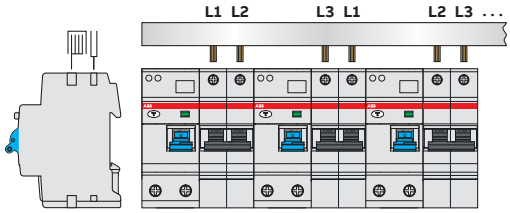

PS 4/36/16 H-DDA 204 T

DS 204 (m 40 A) + S2C-S/H6R + DS 204 (m 40 A) + S2C-S/H6R + DDA 204 (m 40 A) + S 204 + S2C-S/H6R + DDA 204 (m 40 A) + S 204 + S2C-S/H6R

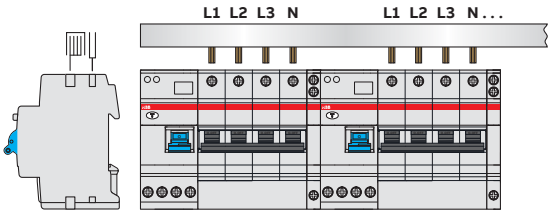

PS 3/28/16 H-DDA 202 T

DS 202 + S2C-S/H6R + (DDA 202 + S 202) + S2C-S/H6R ...

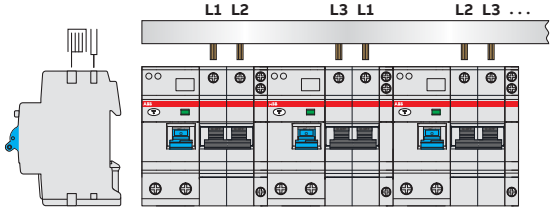

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Selection guide

PS 2/12
PS 2/12 A
PS 2/12/16
PS 2/58
PS 2/58/16
PS 2/58/16 A

F202 + S-ARC1 ...

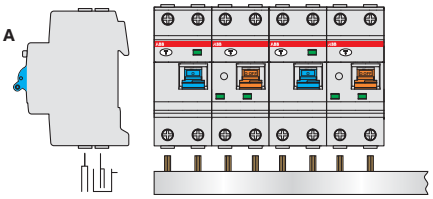

PS 2/48 H
PS 2/48/16 H
PS 2/48/16 HA

F202 + S2C-S/H6R + S-ARC1 ...

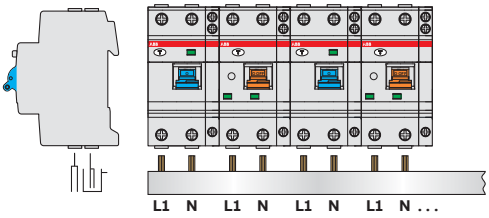

PS 4/12 NA
PS 4/58 N
PS 4/58/16 N
PS 4/58/16 NA

S-ARC1 S-ARC1 ...

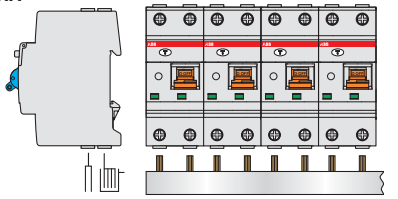

PS 4/48 NHA
PS 4/48/16 NHA

S-ARC1 + S2C-S/H6R + S-ARC1 ...

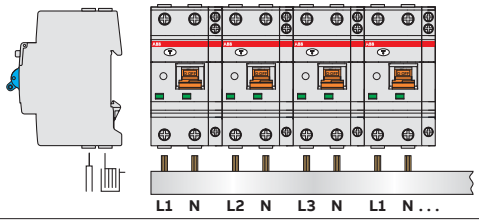

PS 4/12 NN A
PS 4/12/16 NN A
PS 4/58 NN A
PS 4/58/16 NN A

F204 + S-ARC1 + S-ARC1 + S-ARC1 + S-ARC1 + ...

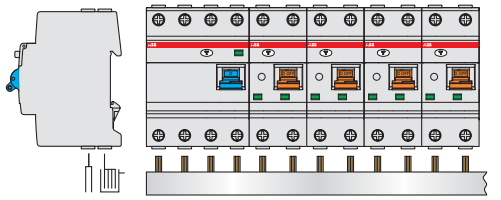

PS 4/12 NNT
PS 4/12/16 NNT

F204 + S-ARC1 + S-ARC1 + S-ARC1 + S-ARC1 + ...

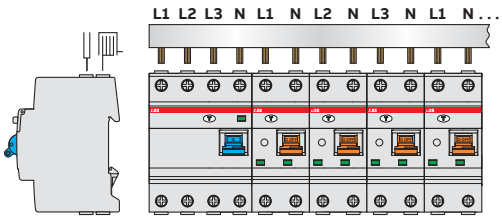

PS 2/8/16 AFDD
PS 2/40/16 AFDD

DS-ARC1 DS-ARC1 ...

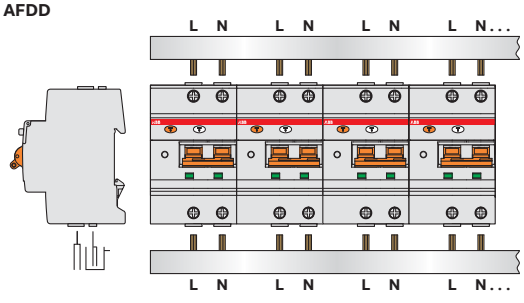

PS 4/36/16 AFDD T

DS-ARC1 DS-ARC1 ...

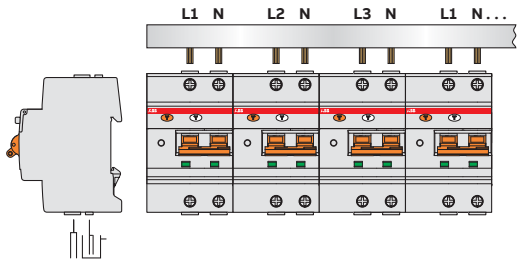

PS 4/36/16 AFDD

DS-ARC1 DS-ARC1 ...

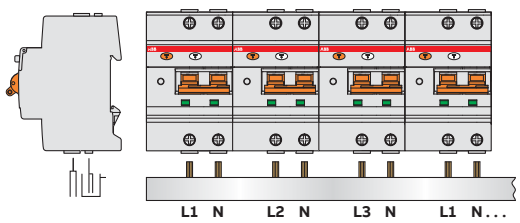

PS 4/30/16 H AFDD T

DS-ARC1 + S2C-S/H6R + DS-ARC1 ...

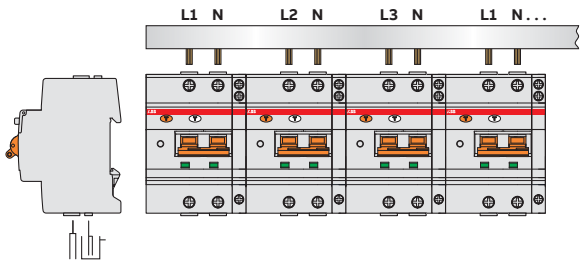

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Selection guide

PS 4/30/16 H AFDD **DS-ARC1 + S2C-S/H6R + DS-ARC1 ...**

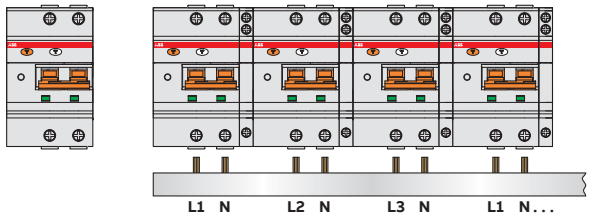

PSc 1/24/10 N
PSc 1/120/10 N
DS301C DS301C ...

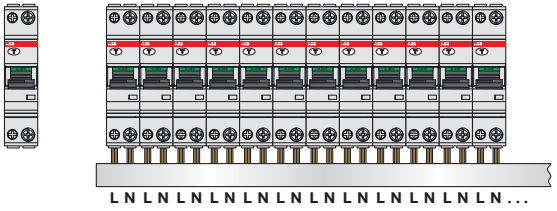

PSc 3/24/10 N
PSc 3/120/10 N
DS301C DS301C ...

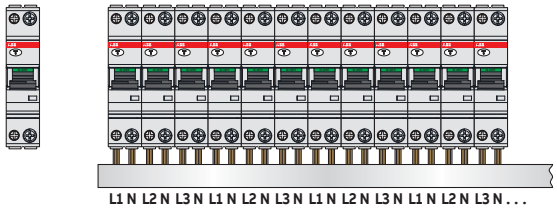

BN-S 2/12/10
BN-S 2/56/16
DS202CR DS202CR ...

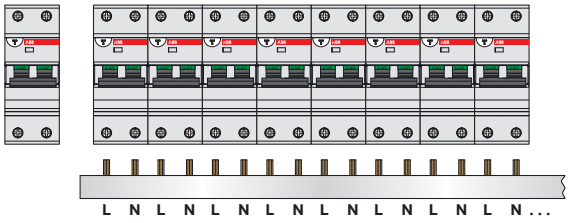

BN-S 4/12/10
BN-S 4/54/10
BN-S 4/54/16
DS202CR DS202CR ...

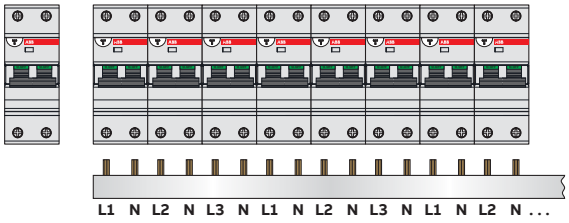

BN-S 2/10/10H
BN-S 2/46/16H
DS202CR + S2C-S/H6R DS202CR ...

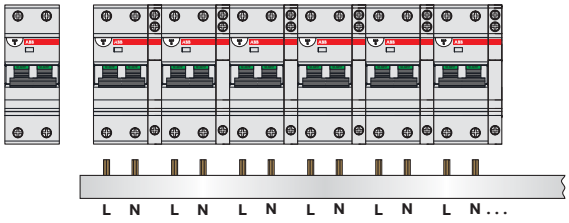

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Selection guide

Short description
ABB busbar systems enable the safe and fast connection of main devices.

Selection criteria:
- Type of devices (MCB, RCCB, RCBO or AFDD)
- Number of devices
- Number of phases (1, 1P+N, 2, 3, 3P+N, 4)
- Phases sequence
- Busbar cross section (for current carrying capacity)
- Use of side mounted half module accessories

	[ ] / [ ] / [ ][ ] / [ ][ ]								
	1	2	3	4	5	6	7	8	9
Product range									
PS; PSc; BS9; BF2-S9; BB; BN									
Phases									
1 phase		1							
2 phase		2							
3 phase		3							
4 phase		4							
Number of pins									
Busbar cross-section									
10 mm²					-	**			
6 mm²					6	-			
16 mm²					1	6			
30 mm²					3	0			
Application									
Cross connection of RCCB and MCB (4th pin removed for RCCB 3+N)							F	I	
Use of neutral conductor (phase sequence e.g. L1-N-L2-N-L3-N-L1...)						N			
Space for 1 side mounted auxiliary contact						H			
Pins for breaking off									A
Cross connection of devices 3P+N + 1P+N (phase sequence L1-L2-L3-N-L1-N-L2-N-L1-N-...)							N	N	
Busbars for IT networks							I	T	
Busbars acc. to UL 489 (Branch Protection)							B	P	
Busbars acc. to UL 1077 (Supplementary Protection)							C	B	
Busbars for direct current applications							D	C	

Note: Combinations of above applications are possible

* only right side mounted auxiliary elements and bottom fixed auxiliary contacts can be considered for busbar connection
** 10 for Sn201, S200C, DS301C busbars

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Busbars PS

PS 1/2 - PS 1/12

Pre-assembled busbars (not to be cut)

1-phase busbars, pin distance 17.6 mm, end caps PS-END 0

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code		kg	pc.
2	1	10	0.01	463003	PS1/2	2CDL210001R1002		0.01	180
3	1	10	0.03	514651	PS1/3	2CDL210001R1003		0.03	120
4	1	10	0.03	648233	PS1/4	2CDL210001R1004		0.03	100
6	1	10	0.03	463102	PS1/6	2CDL210001R1006		0.03	60
9	1	10	0.04	463201	PS1/9	2CDL210001R1009		0.04	30
12	1	10	0.05	463300	PS1/12	2CDL210001R1012		0.05	30



PS 3/6 - PS 3/12

3-phase busbars, pin distance 17.6 mm

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code		kg	pc.
6	3	10	0.04	463409	PS3/6	2CDL231001R1006		0.04	60
9	3	10	0.07	463508	PS3/9	2CDL231001R1009		0.07	30
12	3	10	0.10	463607	PS3/12	2CDL231001R1012		0.10	30
12	3	10	0.10	463706	PS3/12FI *	2CDL231002R1012		0.09	50

* phase sequence: L1, L2, L3, free, L2, L3, L1, ...

Busbars suitable for cutting

1-phase busbars, pin distance 17.6 mm, end caps PS-END 0

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code		kg	pc.
60	1	10	0.26	514668	PS1/60	2CDL210001R1060		0.26	20
60	1	10	0.26	682992	PS1/60A ②	2CDL210010R1060		0.28	50
60	1	16	0.41	516655	PS1/60/16	2CDL210001R1660		0.41	20
60	1	30	0.520	653596	PS1/60/30	2CDL210001R3060		0.520	20

1-phase busbars, connection of 1-pole devices with auxiliary, end caps PS-END 0

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code		kg	pc.
38	1	10	0.27	586139	PS1/38H	2CDL210001R1038		0.27	30
38	1	16	0.45	586146	PS1/38/16H	2CDL210001R1638		0.45	30

① inclusive of end caps
② pre-cutted pins

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Busbars PS

PS 1/2 - PS 1/...

1-phase busbars, connection of neutral (blue insulation), end caps END 1.1

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
57	1	10	0.24	579728	PS1/57NA ②	2CDL210011R1057		0.14	50
57	1	16	0.32	579735	PS1/57/16NA ②	2CDL210011R1657		0.20	50

1-phase busbars, connection of auxiliaries, end caps END 1.1 except PS 1/57/6

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
38	1	6	0.14	580816	PS1/38/6	2CDL210005R0638		0.09	50

PS 2/12 - PS 2/...

2-phase busbars, pin distance 17.6 mm, end caps PS-END

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
12	2	10	0.07	556521	PS2/12 ①	2CDL220001R1012		0.08	50
12	2	10	0.07	584616	PS2/12A ①②	2CDL220010R1012		0.08	50
12	2	16	0.11	646918	PS2/12/16	2CDL220001R1612		0.09	50
58	2	10	0.32	556552	PS2/58	2CDL220001R1058		0.36	10
58	2	16	0.55	556569	PS2/58/16	2CDL220001R1658		0.49	10
58	2	16	0.55	584746	PS2/58/16A ②	2CDL220010R1658		0.49	10
58	2	30	1.81	654272	PS2/58/30 ③④	2CDL220001R3058		1.81	10

Note: PS...A is a busbar with removable pin

2-phase busbars, connection of 2-pole devices with auxiliary, end caps PS-END

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
48	2	10	0.47	556538	PS2/48H	2CDL220001R1048		0.35	10
48	2	16	0.68	556545	PS2/48/16H	2CDL220001R1648		0.48	10
48	2	16	0.68	584630	PS2/48/16HA ②	2CDL220012R1648		0.48	10

① inclusive of end caps
② pre-cutted pins
③ use end cap PS-END 3
④ removal of installed MCB not possible

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Busbars PS

PS 3/11 - PS 3/...

3-phase busbars, pin distance 17.6 mm, end caps PS-END

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
11	3	10	0.10	649926	PS3/11 ①	2CDL230001R1011		0.08	50
12	3	10	0.09	576116	PS3/12 ①	2CDL230001R1012		0.09	50
12	3	10	0.09	584647	PS3/12A ①②	2CDL230010R1012		0.09	50
12	3	16	0.16	562805	PS3/12/16 ①	2CDL230001R1612		0.12	50
60	3	10	0.51	514699	PS3/60	2CDL230001R1060		0.47	10
60	3	10	0.51	563758	PS3/60A ②	2CDL230010R1060		0.47	10
60	3	16	0.76	514705	PS3/60/16	2CDL230001R1660		0.65	10
60	3	16	0.76	563765	PS3/60/16A ②	2CDL230010R1660		0.65	10
60	3	30	2.65	654289	PS3/60/30 ③⑤	2CDL230001R3060		2.65	10

3-phase busbars, connection of 1-pole devices with auxiliary, end caps PS-END

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
39	3	10	0.51	556590	PS3/39H	2CDL230001R1039		0.43	10
39	3	16	0.76	556606	PS3/39/16H	2CDL230001R1639		0.60	10

3-phase busbars, connection of 2-pole devices (Phase+N) with auxiliary, end caps PS-END

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
24	3	10	0.80	556576	PS3/24H	2CDL230001R1024		0.41	10

3-phase busbars, connection of 2-pole devices (Phase+Phase) with auxiliary, end caps PS-END

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
46	3	16	0.98	662109	PS3/46/16H-IT	2CDL230006R1646		0.98	10

3-phase busbars, connection of 3-pole devices with auxiliary, end caps PS-END

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
48	3	10	0.51	556613	PS3/48H	2CDL230001R1048		0.43	10
48	3	16	0.76	556644	PS3/48/16H	2CDL230001R1648		0.60	10
48	3	16	0.76	584654	PS3/48/16HA ②	2CDL230012R1648		0.60	10

3-phase busbars, connection of 1+N or RCBOs, end caps PS-END

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
30	3	10	0.50	556583	PS3/30	2CDL230001R1030		0.42	10

① inclusive of end caps
② pre-cutted pins
③ use end cap PS-END 3
④ use end cap PS-END 3.1
⑤ removal of installed MCB not possible

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Busbars PS

PS 3/9 - PS 3/...

3-phase busbars, N of the RCD omitted, end caps PS-END

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
9	3	10	0.10	517515	PS3/9FI ①	2CDL230002R1009		0.06	50
10	3	10	0.10	517522	PS3/10FI ①	2CDL230002R1010		0.07	50
12	3	10	0.11	571074	PS3/12FI ①	2CDL230002R1012		0.09	50
57	3	10	0.55	556651	PS3/57FI	2CDL230002R1057		0.46	10

3-phase busbars, N of the RCD omitted, with auxilary at RCD end caps PS-END

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
12	3	10	0.11	571081	PS3/12FIH ①	2CDL230003R1012		0.09	50

4-phase busbars, pin distance 17.6 mm, end caps PS-END 1

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
12	4	10	0.12	656054	PS4/12 ①	2CDL240101R1012		0.11	30
12	4	10	0.12	656061	PS4/12A ①②	2CDL240110R1012		0.11	30
12	4	16	0.24	656078	PS4/12/16 ①	2CDL240101R1612		0.16	30
60	4	10	0.80	656085	PS4/60	2CDL240101R1060		0.64	10
60	4	16	1.21	656092	PS4/60/16	2CDL240101R1660		0.89	10
60	4	30	3.37	654296	PS4/60/30 ④⑤	2CDL240001R3060		3.37	10

Note: PS...A is a busbar with removable pin

① inclusive of end caps
② pre-cutted pins
③ use end cap PS-END 3
④ use end cap PS-END 3.1
⑤ removal of installed MCB not possible

Busbars and busbars'accessories for MCBs, RCDs and AFDDs

Busbars PS

PS 4/12 - PS 4/...

4-phase busbars, connection of 4-pole devices with auxiliary, end caps PS-END 1

No. of pins	Phases	mm²	Cu-No. kg	Bbn 4016779 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
52	4	16	1.30	656115	PS4/52/16H	2CDL240101R1652		0.78	10
52	4	16	1.30	656122	PS4/52/16HA ②	2CDL240212R1652		0.78	10

4-phase busbars, connection of 1+N or RCBOs, end caps PS-END 1

No. of pins	Phases	mm²	Cu-No. kg	Bbn 4016779 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
12	4	10	0.14	656139	PS4/12NA ①②	2CDL240213R1012		0.10	30
58	4	10	0.80	656146	PS4/58N	2CDL240101R1058		0.59	10
58	4	16	1.21	656153	PS4/58/16N	2CDL240101R1658		0.77	10
58	4	16	1.21	656221	PS4/58/16NA ②	2CDL240213R1658		0.77	10

4-phase busbars, connection of 1+N or RCBOs with auxiliary, end caps PS-END 1

No. of pins	Phases	mm²	Cu-No. kg	Bbn 4016779 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
48	4	16	1.48	656160	PS4/48/16NHA ②	2CDL240114R1648		0.76	10

4-phase busbars, connection of 4-pole RCD with 1+N , end caps PS-END 1

No. of pins	Phases	mm²	Cu-No. kg	Bbn 4016779 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
58	4	10	0.80	656177	PS4/58NNA ②	2CDL240110R1058		0.58	10
58	4	16	1.21	656184	PS4/58/16NNA ②	2CDL240110R1658		0.80	10

PS 4/12 - PS 4/...

Busbars for S-ARC1 installation

4-phase busbars, connection of 4-pole F204 with 1+N S-ARC1, end caps PS-END 1, Bottom side installation

No. of pins	Phases	mm²	Cu-No. kg	Bbn 4016779 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
12	4	10	0.105	060301	PS4/12NN 1)	2CDL240102R1012		0.110	30

Busbars for DS-ARC1 installation

4-phase busbar, end caps PS-END 1; first one: top side mounting; second one: bottom side mounting

36	4	16	0.985	063135	PS 4/36/16 AFDD	2CDL240102R1636		0.67	10

① inclusive of end caps
② pre-cutted pins
③ use end cap PS-END 3
④ use end cap PS-END 3.1
⑤ removal of installed MCB not possible

Busbars and accessories for MCBs, RCDs and AFDDs

Busbars PS

PS 4/36 - PS 4/...

4-phase busbars, connection of DDA 202 and DS 202, end caps PSB-END 4 (phase sequence L1-N-free-free-L2-N...)

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
30	4	16	1.67	652852	PS 4/30/ 16N-DDA 202T	2CDL040202R1630			10

4-phase busbars, connection of DDA 202 and DS 202 with auxiliary, end caps PSB-END 4 (phase sequence L1-N-aux.(free)-free-free-L2-N-aux.(free)...)

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
30	4	16	1.72	652599	PS 4/30/ 16NH-DDA 202T	2CDL041202R1630			10

4-phase busbars, connection of DDA 204 25 A and 40 A and DS 204 up to 40 A, end caps PSB-END 4 (phase sequence L1-L2-L3-N-free-free-L1.....)

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
40	4	16	1.79	652605	PS 4/40/ 16-DDA 204T	2CDL040204R1640			10

Busbars and busbars' accessories for MCBs, RCDs and AFDDs

Accessories for Busbars PS

PS-END

Accessories for busbars PS ...

End caps

	Bbn 4016779	Order details		Weight 1 piece	Pack unit
	EAN	Type code	Order code	kg	pc.
	638913	END 1.1	2CDL200011R0011	0.001	50
	652261	PS-END 0	2CDL200001R0004	0.001	50
	514729	PS-END	2CDL200001R0001	0.001	50
	570114	PS-END 1	2CDL200001R0002	0.001	50
	654302	PS-END 3	2CDL200001R3001	0.001	50
	654319	PS-END 3.1	2CDL200001R3002	0.001	50
	556304①	PSB-END 3	GHV0361325R0001	0.001	50
	556403①	PSB-END 4	GHV0361325R0002	0.001	50
	950060	PS-END 3 BP-C	2CDL200489R0003	0.001	50

① bbn-No. 4012233

SZ-BSK

BSK

Shock-protection caps for busbars PS...

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	kg	pc.
	5 parts			420006	SZ-BSK	2CDL200001R0011	0.003	10
	5 parts			649834	BSK*	2CDL200001R0012	0.003	10

* closed version

Busbars and busbars' accessories for RCBOs DS202CR

Busbars BR

BR-S 2/12/10

BR-S 2/56/16

Busbars for DS202CR

Busbars

No. of Pins	Phases	mm²	Bbn 405354	Order details		Weight 1 piece	Pack unit
			EAN	Type code	Order code	kg	pc.
54	4	16	6178289	BN-S 4/54/16	2CDL844002R1654	0.66	15
54	4	10	6178265	BN-S 4/54/10	2CDL844002R1054	0.63	15
12	4	10	6178234	BN-S 4/12/10	2CDL844002R1012	0.101	5
57	3	16	6178197	BN-S 3/57/16	2CDL834002R1657	0.572	20
57	3	10	6178159	BN-S 3/57/10	2CDL834002R1057	0.413	20
44	3	10	6178111	BN-S 3/44/10H	2CDL834002R1044	0.396	20
18	3	10	6178074	BN-S 3/18/10	2CDL834002R1018	0.132	10
12	3	10	6178036	BN-S 3/12/10	2CDL834002R1012	0.085	10
56	2	16	6177961	BN-S 2/56/16	2CDL824002R1656	0.433	20
46	2	16	6177923	BN-S 2/46/16H	2CDL824002R1646	0.426	20
12	2	10	6177817	BN-S 2/12/10	2CDL824002R1012	0.065	10
10	2	10	6177879	BN-S 2/10/10H	2CDL824002R1010	0.087	10
54	4	16	6178524	BN-G 4/54/16	2CDL845002R1654	0.686	15
54	4	10	6178500	BN-G 4/54/10	2CDL845002R1054	0.619	15
18	4	10	6178487	BN-G 4/18/10	2CDL845002R1018	0.162	20
57	3	16	6178463	BN-G 3/57/16	2CDL835002R1657	0.511	20
57	3	10	6178449	BN-G 3/57/10	2CDL835002R1057	0.535	20
44	3	10	6178425	BN-G 3/44/10H	2CDL835002R1044	0.396	20
18	3	10	6178401	BN-G 3/18/10	2CDL835002R1018	0.14	20
12	3	10	6178388	BN-G 3/12/10	2CDL835002R1012	0.089	10
56	2	16	6178340	BN-G 2/56/16	2CDL825002R1656	0.442	20
46	2	16	6178364	BN-G 2/46/16H(2+H)	2CDL825002R1646	0.45	20
18	2	10	6178302	BN-G 2/18/10	2CDL825002R1018	0.115	20
10	2	10	6178326	BN-G 2/10/10H2+H	2CDL825002R1010	0.069	10

Accessories

BR-FS 25/14

BR-BS

End Caps

No. of Pins	Phases	mm²	Bbn 405354	Order details		Weight 1 piece	Pack unit
			EAN	Type code	Order code	kg	pc.
		10/16	6046717	BB-END 2.1	2CDL800001R0021	0,001	10
		16	6046731	BB-END 3.2	2CDL800001R0030	0,001	10
		10/16	6046823	BB-END 4.1	2CDL800001R0040	0,001	10

Feeder terminal

No. of Pins	Phases	mm²	Bbn 405354	Order details		Weight 1 piece	Pack unit
			EAN	Type code	Order code	kg	pc.
		25	6062366	BR-FS 25/14	2CDL800001R2514	0,018	30

Schock protection caps

No. of Pins	Phases	mm²	Bbn 405354	Order details		Weight 1 piece	Pack unit
			EAN	Type code	Order code	kg	pc.
			6062403	BR-BS	2CDL800001R0051	0,018	10

Busbars and busbars' accessories for compact MCBs SN201 and S200C

Busbars BS9 and BF2-S9



BS9+FEED-IN



BS9 NA+FEED-IN

Busbars for SN 201 range (Maximum rated current 63 A)

No. pins	Phases	Cross section	Bbn 8012542	Order details		Weight 1 piece	Pack unit
		mm²	EAN	Type code	Order code	kg	pc.
12	1	10	047650	BS9 1/12	2CSL910001R1012	0.050	10
12	1	10	047759	BS9 1/12 NA	2CSL910011R1012	0.050	10
56	1	10	047353	BS9 1/56	2CSL910001R1056	0.140	10
56	1	10	047452	BS9 1/56 NA	2CSL910011R1056	0.140	10
12	3	10	047551	BS9 3/12	2CSL930001R1012	0.090	5
57	3	10	047858	BS9 3/57	2CSL930001R1057	0.470	5

Busbars for F200/S200 and SN 201 range (Maximum rated current 63 A)

No. pins	Phases	Cross section	Bbn 8012542	Order details		Weight 1 piece	Pack unit
		mm²	EAN	Type code	Order code	kg	pc.
2 + 10 x 1+N	2	10	046950	BF2-S9 UP 1N/12	2CSL920009R1012	0.110	5
4 + 8 x 1+N	4	10	047056	BF2-S9 UP 3N/12	2CSL940009R1012	0.110	5
2 + 10 x 1+N	2	10	047155	BF2-S9 DOWN 1N/12	2CSL920002R1012	0.110	5
4 + 8 x 1+N	4	10	047254	BF2-S9 DOWN 3N/12	2CSL940002R1012	0.110	5

Accessories

Feeder Terminal

Conn. capacity	Type of connec-tion	Terminal lug L	Bbn 8012542	Order details		Weight 1 piece	Pack unit
mm²		mm	EAN	Type code	Order code	kg	pc.
25	pin	15	047957	FEED-IN 25/15 1P	2CSL980001R2515	0.010	5
25	pin	30	048053	FEED-IN 25/30 3P	2CSL980001R2530	0.010	5

End caps

	Bbn 4012233	Order details		Weight 1 piece	Pack unit
	EAN	Type code	Order code	kg	pc.
	064251	BS9-END 3P ①	2CSL980001R0001	0.001	20

① In combination with BS9 3/57

Busbars and busbars' accessories for DSN201E

Busbars BB

BB-SU 1/13/10 GREY

Busbars available for the connection with S200C sereis

No. pins	Phases Supply	Distrib.	mm²	Bbn 4053546 EAN	Order details Type code	Order code	Weight 1 piece kg	Pack unit pc.
13	1P	1P+N MCBs	10	046830	BB-SU 1/13/10 GREY (1)	2CDL801141R1013	0.044	15
13	1P	1P+N MCBs	10	046847	BB-SU 1/13/10 BLUE (2)	2CDL801145R1013	0.044	15
36	2P	2P or 1P +N MCBs	10	046755	BB-SU 2/36/10	2CDL802141R1018	0.112	20
112	2P	2P or 1P +N MCBs	10	046816	BB-SU 2/112/10	2CDL802141R1055	0.336	20
24	3P	2P MCBs	10	046762	BB-SU 3/24/10	2CDL803141R1024	0.125	15
112	3P	2P MCBs	10	046779	BB-SU 3/112/10	2CDL803141R1111	0.579	15
108	3P+N	2P MCBs	10	046809	BB-SU 4/108/10 N	2CDL804142R1110	0.752	10
112	3P+N	4P or 3P +N MCBs	10	046786	BB-SU 4/112/10 Kit*	2CDL804141R1055	0.640	5

* incl. 4 end caps and 4 connection clamps
(1) Phase connection
(2) Neutral connection

BB-FS 25/27 Q

Accessories

Feeder Terminal

mm²	Bbn 4053546 EAN	Order details Type code	Order code	Weight 1 piece kg	Pack unit pc.
25	046748	BB-FS 25/27 Q	2CDL800001R2527	0.015	30

BB-END

End Caps

mm²	Bbn 4053546 EAN	Order details Type code	Order code	Weight 1 piece kg	Pack unit pc.
10/16	046717	BB-END 2.1	2CDL800001R0021	0.001	10
16	046731	BB-END 3.2	2CDL800001R0030	0.001	10
10/16	046823	BB-END 4.1	2CDL800001R0040	0.001	10

BHY 2/12N

BHY 2/18N

Busbars

No. pins	Phases Supply	Distrib.	mm²	Bbn 4053546 EAN	Order details Type code	Order code	Weight 1 piece kg	Pack unit pc.
22	2		16	158946	BHY 2/12N Bottom Hybrid 2 ph 12 mod	2CDL920001R1620	0.12	20
34	2		16	158953	BHY 2/18N Bottom Hybrid 2 ph 18 mod	2CDL920001R1632	0.145	20
20	4		16	158960	BHY 4/12N Bottom Hybrid 4 ph 12 mod	2CDL940001R1616	0.18	15
32	4		16	158977	BHY 4/18N Bottom Hybrid 4 ph 18 mod	2CDL940001R1628	0.235	15

Busbars and busbars' accessories for compact MCBs DSN201E

Busbars BB

BHY

Accessories

End Caps					
	Bbn 4053546	Order details		Weight 1 piece	Pack unit
mm²	EAN	Type code	Order code	kg	pc.
16	159134	BHY-End2 End cap 2ph	2CDL900001R0002	0,001	10
16	159172	BHY-End4 End cap 4 ph	2CDL900001R0004	0,001	10
16	159219	BHY-BS Protective cap	2CDL900001R0051	0,001	10

Busbars and busbars' accessories for compact RCBOs DS301C and S200C

Busbars PSc

PSc Busbars								
No.of Modules	Phases	mm²	EAN	Type code	Order code	Space for auxiliary	Weight 1 piece	Pack unit
12	1	10	4053546050516	PSc 1/24/10 N	2CDL210331R1012		0.103	10
18	1	10	4053546163636	PSc 1/36/10 N	2CDL230331R1018		0.166	10
57	1	10	4053546050530	PSc 1/114/10 N	2CDL210331R1060		0.511	10
10	3	10	4053546163513	PSc 3/20/10 N	2CDL230331R1010		0.115	10
12	3	10	4053546050554	PSc 3/24/10 N	2CDL230331R1012		0.145	10
57	3	10	4053546050561	PSc 3/114/10 N	2CDL230331R1060		0.725	10
8	1	10	4053546055221	PSc 1/16/10 NH	2CDL210332R1012	■	0.094	10
39	1	10	4053546055252	PSc 1/78/10 NH	2CDL210332R1060	■	0.464	10
8	3	10	4053546055276	PSc 3/16/10 NH	2CDL230332R1012	■	0.12	10
39	3	10	4053546055290	PSc 3/78/10 NH	2CDL230332R1060	■	0.65	10

Accessories

End Caps				
EAN	Type code	Order code	Weight 1 piece	Pack unit
4053546051131	PSc-END	2CDL200331R0003	0.015	10

Shock protection Caps				
EAN	Type code	Order code	Weight 1 piece	Pack unit
4053546051124	BSKc	2CDL200331R0013	0.001	10

Feeder terminal IP 20				
EAN	Type code	Order code	Weight 1 piece	Pack unit
4053546143133	AST 25/25 QIR	2CDL200003R2525	0.014	10

Busbars and busbars' accessories for MCBs acc. UL 489

Busbars PS...BP

PS2/6/16 BP

BSK BP

AST35/15BP

SZ-ESK BP

Pre-assembled busbars (not to be cut), suitable for SU200 M, S200 UDC, S200 U and S200 UP

1-phase busbars, pin distance 17.6 mm, UL 489

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	kg	pc.
6	1	16	0.04	644969	PS 1/6/16 BP	2CDL210489R1606	0.05	1

2-phase busbars, pin distance 17.6 mm, UL489

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	kg	pc.
6	2	16	0.07	644990	PS 2/6/16 BP	2CDL220489R1606	0.06	1
12	2	16	0.14	645003	PS 2/12/16 BP	2CDL220489R1612	0.13	1
18	2	16	0.21	645010	PS 2/18/16 BP	2CDL220489R1618	0.20	1

3-phase busbars. pin distance 17.6 mm. UL 489

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	kg	pc.
6	3	16	0.11	645027	PS 3/6/16 BP	2CDL230489R1606	0.07	1
12	3	16	0.22	645034	PS 3/12/16 BP	2CDL230489R1612	0.15	1
18	3	16	0.33	645041	PS 3/18/16 BP	2CDL230489R1618	0.24	1

Accessories for busbars PS...BP

Feeder Terminals for PS...BP (UL 489)

Conn. capacity	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
mm²	kg	EAN	Type code	Order code	kg	pc.
35	0.035	710350	AST 35/15 BP	2CDL201489R3515	0.035	25
Single-pole terminal, can be mounted side by side, feed on the pin of the busba						
50		710367	SZ-ESK BP	2CDL201489R5001	0.038	50

Shock-protection caps for PS...BP (UL 489)

		Bbn 4016779	Order details		Weight 1 piece	Pack unit
		EAN	Type code	Order code	kg	pc.
	3 parts	656368	BSK BP	2CDL200489R0001	0.001	10

① inclusive of end caps
② pre-cutted pins
③ use end cap PS-END 3
④ use end cap PS-END 3.1
⑤ removal of installed MCB not possible

Busbars and busbars' accessories for MCBs acc. UL 489

Busbars PS...BP-C

PS1/57/25BP-C

Busbars PS....BP-C (suitable for cutting), suitable for: SU200 M, S200 UDC, S200 U and S200 UP

1-phase busbars, pin distance 17.6 mm, end caps PS-END 3 BP-C

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	kg	pc.
57	1	25	0.47	949910	PS1/57/25BP-C	2CDL210489R5725	0.775	10

1-phase busbars, connection of 1-pole devices with auxiliary, end caps PS-END 3 BP-C

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	kg	pc.
37	1	25	0.5	949934	PS1/37/25HBP-C	2CDL210489R3725	0.661	10

2-phase busbars, pin distance 17.6 mm, end caps PS-END 3 BP-C

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	kg	pc.
56	2	25	0.888	949941	PS2/56/25BP-C	2CDL220489R5625	0.969	10

2-phase busbars, connection of 2-pole devices with auxiliary, end caps PS-END 3 BP-C

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	kg	pc.
46	2	25	0.87	949958	PS2/46/25HBP-C	2CDL220489R4625	0.943	10

3-phase busbars, pin distance 17.6 mm, end caps PS-END 3 BP-C

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	kg	pc.
57	3	25	1,31	949965	PS3/57/25BP-C	2CDL230489R5725	1.198	10

3-phase busbars, connection of 3-pole devices with auxiliary, end caps PS-END 3 BP-C

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	kg	pc.
48	3	25	1,28	949972	PS3/48/25HBP-C	2CDL230489R4825	1.129	10
39	3	25	1,305	949989	PS3/39/25HBP-C	2CDL230489R3925	1.115	10

Accessories for busbars PS....BP-C

Feeder Terminal

Conn. capacity mm²	Cu-No.	Bbn 4016779	Order details		Weight 1 piece	Pack unit
	kg	EAN	Type code	Order code	kg	pc.
25	0.038	950060	AST 35/58 BP-C	2CDL201489R3558	0.045	10

Busbars and bubsars' accessories for MCBs acc. UL 1077

Busbars PS...CB



PS 3/57/18 CB

Busbars PS...CB (suitable for cutting)

			Bbn 4016779	Order details		Weight 1 piece	Pack unit
No. of pins	Phases	mm²	EAN	Type code	Order code	kg	pc.
1-phase busbars, pin distance 17.6 mm, end caps PS-END 1 CB							
57	1	18	906760	PS 1/57/18 CB	2CDL210508R5718	0.289	10
57	1	25	906913	PS 1/57/25 CB	2CDL210508R5725	0.360	10
2-phase busbars, pin distance 17.6 mm, end caps PS-END 3 CB							
56	2	18	906807	PS 2/56/18 CB	2CDL220508R5618	0.639	10
56	2	25	906951	PS 2/56/25 CB	2CDL220508R5625	0.795	10
2-phase busbars, connection of 2-pole devices with auxiliary, end caps PS-END 3 CB							
46	2	18	906821	PS 2/46/18 H CB	2CDL220508R4618	0.672	10
46	2	25	906975	PS 2/46/25 H CB	2CDL220508R4625	0.782	10
3-phase busbars, pin distance 17.6 mm, end caps PS-END 3 CB							
57	3	18	906852	PS 3/57/18 CB	2CDL230508R5718	0.929	10
57	3	25	906999	PS 3/57/25 CB	2CDL230508R5725	1.026	10
3-phase busbars, connection of 3-pole devices with auxiliary, end caps PS-END 3 CB							
48	3	18	906876	PS 3/48/18 H CB	2CDL230508R4818	0.788	10

Accessories

Description	Bbn 4016779	Order details		Weight 1 piece	Pack unit
	EAN	Type code	Order code	kg	pc.
Feeder terminals with pin contact					
for use with MCB and 1-phase busbar	907156	AST 35/15-2 CB	2CDL202508R3515	0.025	25
for use with MCB and 2-/3-phase busbar	067904	AST 35/38-2 CB	2CDL202508R3538	0.032	10
for use with E90 and 2-/3-phase busbar	907132	AST 35/38-1 CB	2CDL201508R3538	0.032	10
for use with E90 and 1-phase busbar	907118	AST 35/15-1 CB	2CDL201508R3515	0.025	25
Single-pole terminal, can be mounted side by side, feed to the busbar pin					
	710381	SZ ESK SP	2CDL200111R5001	0.032	50
End caps					
for use with PS 1...CB	907057	PS-END 1 CB	2CDL200508R0001	0.001	50
for use with PS 2...CB and PS3...CB	907071	PS-END 3 CB	2CDL200508R0003	0.002	50

Busbars and busbars' accessories for MCBs acc. UL 1077

Busbars PS...CB

Installation of busbars and use of feeder terminals/cables for feed

MCB with 1-phase busbar
Feeder terminal AST 35/15-2 CB

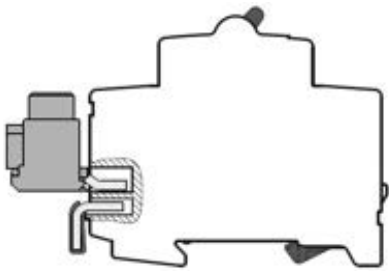

MCB with 1-phase busbar
Feed using cable

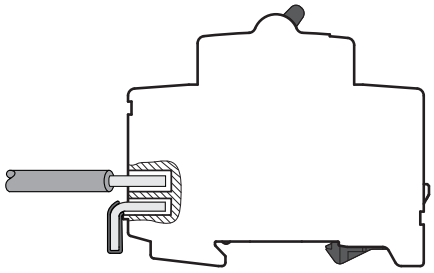

E90 with 1-phase busbar
Feeder terminal AST 35/15-1 CB

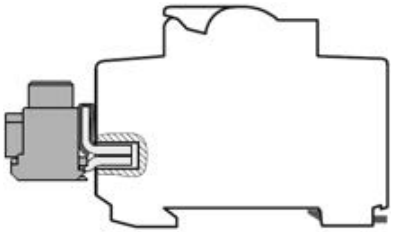

E90 with 1-phase busbar
Feed using cable

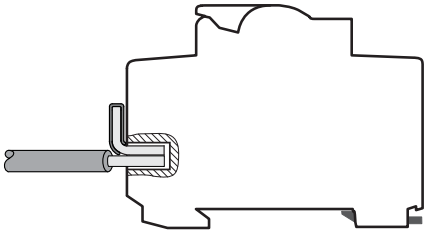

E90 with 2-/3-phase busbar
Feeder terminal AST 35/38-1 CB

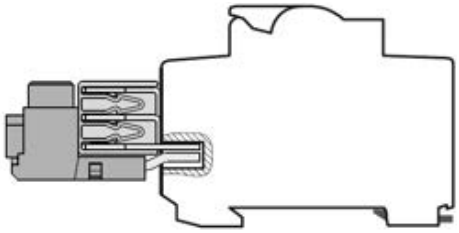

E90 with 2-/3-phase busbar
Feed using cable

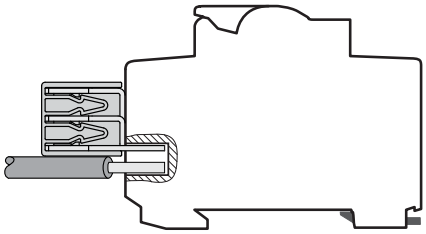

MCB with 2-/3-phase busbar
Feeder terminal AST 35/38-2 CB

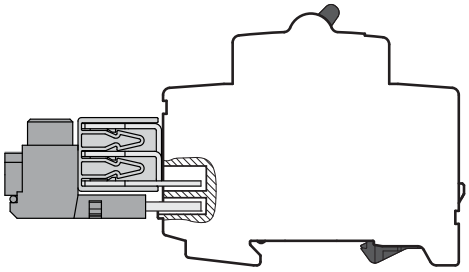

MCB with 2-/3-phase busbar
Feed using cable

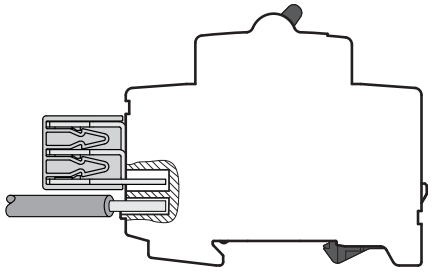

Busbars and busbars' accessories for ST200 MTR and SU200MR

Busbars PS…BP-CR

Busbars PS...BP-CR (suitable for cutting)

No. of pins	Phases	mm²	Bbn 4016779	Order details		Weight 1 piece	Pack unit
			EAN	Type code	Order code	kg	pc.
57	3	25	950039	PS3/57/25BP-CR	2CDL231489R5725	1,244	10

Accessories

Description	Bbn 4013614	Bbn 4016779	Order details		Weight 1 piece	Pack unit
	EAN	EAN	Type code	Order code	kg	pc.
End cap		950060	PS-END 3 BP-C	2CDL200489R0003	0,001	50

Busbars and busbars' accessories for 1000 V DC applications

Busbars PS...DC



PS 2/60/30 DC

Busbars PS...DC (cuttable) for use with end caps PS-END0 and PS-END3

No. of phases	Phase secquence	Bbn 4016779	Order details		Pack unit	Weight 1 pc.
		EAN	Type code	Order code	pcs.	kg
2	L1-L2-L1-L2...	960199	PS2/60/30DC	2CDL220130R6030	10	0.94

[1] for devices with auxiliary contact (half module) after each phase sequence or for devices with 27mm module width

Accessories

Description	Bbn 4016779	Order details		Pack unit	Weight 1 pc.
	EAN	Type code	Order code	pcs.	kg
End caps					
End caps 1-phase busbar	652261	PS-END0[2]	2CDL200001R0004	25	0.001
End caps 2-phase busbar	654302	PS-END3	2CDL200001R3001	50	0.001
Shock protection caps					
Tooth covers, for 5 pins (pin distance 17.6 mm)	420006	SZ-BSK	2CDL200001R0011	10	0,003

[2] 1 pair (= left and right end cap)

Accessories

for S200, SN201, F200, DS200 and other series



RV 3

Rail connectors

For wiring of component rails in the consumer unit, rail-to-rail clearance 125 mm. In the case of the 4-pole connector, the color of the N conductor is blue.

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
	3-pole	10		512381	RV 3	GHV0360504R0023		0.080	25
	4-pole	10		512244	RV 4	GHV0360504R0024		0.114	25



RV 4

Auxiliary contact bridge for bottom-fitting auxiliary contacts

Wire jumper for integrated auxiliary contact (MCB S200 H or auxiliary contacts S2C-H01/ S2C-H10) for series connections (HKB) or parallel connections (HKB1).

No. of pins	Phases	mm²	Cu-No.	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
			kg	EAN	Type code	Order code	piece	kg	pc.
	1/2 mod.				523134	GHV0360504R0100		0.001	1000
	1 mod.				524209	GHV0360504R0101		0.001	1000

identification label

Labelling system

Package comes with 40 labels, marked or blank. Blank labels can be labeled by hand with an indelible, waterproof pen or using a computerised labelling system (plotter).

Description	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	EAN	Type code	Order code	piece	kg	pc.
identification labels blank	478106	BS	GHS2001946R0001		0.004	30

Accessories

for S200, SN201, F200, DS200 and other series



BS 1/10



Ast 25/15 QS
Ast 25/15 Q
Ast 25/30 QS
Ast 25/30 Q
Ast 50/15 QS
Ast 50/15 Q
Ast 50/18 Q
Ast 50/32 Q



SZ-Ast 95 gk



SZ-Ast 95



Ast 25/15 S
Ast 50/15 S
Ast 50/15
Ast 50/18



Ast 50/32 Q

Identification system ILS

The ILS individual identification sytem for labels is a DIN A5 polyester film for ink jet and laser printers with high temperature resistance. (If laser printers are used, please check whether self-adhesive film with thickness of 250 µm can be fed.) Adhesive coating 3MTM9471 LE has obtained UL approval (file No. MH 11410). There are two types of sheet: uncut for making individual labels or precut with 23 stripes (6 x 191 mm each) for labelling 11 devices (1-module width) per stripe. Word template can be downloaded from www.abb.de/stotz-kontakt. Can also be used as write-on labels (ink, ballpoint pen, pencil, marker).

Terminals, insulated with pin contact

Description	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Technical features						
Connection capacity	6-25 mm²		6-50 mm²	25-95 mm²		
Max. electrical load	63 A		100 A	225 A		
Max. operating voltage	600 V AC		600 V AC	690 V AC		
Max. tightening torque	2 Nm		3 Nm	19 Nm		

The terminals are single-phase. When combined in a multi-phase installation the required clearance and creepage distances needs to be considered!

Conn. capacity	Terminal lug	Type of connection	Cu-No.	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
mm²	LxW mm		kg	EAN	Type code	Order code		kg	pc.
6-25	15/4	straight	0.012	656542	Ast 25/15 S	2CDL200011R2515			50
6-25	13.5/7	90°	0.012	656474	Ast 25/15 Q	2CDL200000R2515			50
6-50	14/4	straight	0.014	656566	Ast 50/15 S	2CDL200011R5015			50
6-50	15/7	90°	0.014	656559	Ast 50/15 Q	2CDL200010R5015			50
6-50	15/7	straight	0.014	656511	Ast 50/15	2CDL200001R5015			50
6-50	17.5/7	straight	0.019	656573	Ast 50/18	2CDL200101R5018			50
6-50	32/6	90°	0.017	656528	Ast 50/32 Q	2CDL200000R5032			50

Abbreviations: Q terminal 90° * not for pro M compact S narrow connection pin

Accessories

for S200, SN201, F200, DS200 and other series

SZ-ESK 2



SZ-ESK 3



SZ-ESK 3 S

SZ-DB 121

SZ-DB 232 N

SZ-DB 125 N



example 1
wiring of devices
consisting of modules
with different lengths
with SZ-DB 125 N or 312

Feeder terminals

Single-pole terminals can be mounted side by side with multipole terminals.

Conn. capacity	Terminal lug LxW	Type of connection	Cu-No.	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
mm²	mm		kg	EAN	Type code	Order code		kg	pc.
6-35				646765	SZ-ESK 2	2CDL200001R3501		0.024	10
6-50				652575	SZ-ESK 3	2CDL200003R5001		0.025	10

Flexible connecting wires

Advantages: smaller dimensions for the same cross-section (more space in terminal)
nearly no transition resistances
more reliability; conductor sleeves could be loosen under specific conditions

with fork-type cable lug (black)

Conn. capacity	Lenght		Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
mm²			EAN	Type code	Order code		kg	pc.
6	260	0.014	556809	SZ-DB 231 N	GHV0361425R0032		0.02	500/25
10		0.022	556908	SZ-DB 232 N	GHV0361425R0033		0.04	250/25

with fork-type cable lug and ultrasonic compacted cable ends (black)

Conn. capacity	Lenght		Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
mm²			EAN	Type code	Order code		kg	pc.
10		0.024	557301	SZ-DB 236	GHV0361425R0037		0.04	250/25

with ultrasonic compacted cable ends (black)

Conn. capacity	Lenght		Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
mm²			EAN	Type code	Order code		kg	pc.
6	125	0.007	557400	SZ-DB 125 N	GHV0361425R0038		0.01	1000/50
6	260	0.015	557509	SZ-DB 233 N	GHV0361425R0039		0.02	500/25
10	135	0.013	557608	SZ-DB 126 N	GHV0361425R0040		0.02	500/25
10	260	0.025	557707	SZ-DB 234 N	GHV0361425R0041		0.04	250/25
10	330	0.032	557806	SZ-DB 312	GHV0361425R0042		0.05	100/25

with ultrasonic compacted cable ends (blue)

Conn. capacity	Lenght		Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
mm²			EAN	Type code	Order code		kg	pc.
10	260	0.025	663533	SZ-DB 10/260 N	2CDL200301R0260		0.04	25
10	330	0.032	663540	SZ-DB 10/330 N	2CDL200301R0330		0.05	25

Accessories

for S200, SN201, F200, DS200 and other series



SZ-6/3

Neutral and protective-conductor terminals with insulation holder for quick fastening onto DIN rails EN 50 022

Input	Output	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
mm²	mm²	EAN	Type code	Order code	piece	kg	pc.
1 x 16	2 x to 16 6 x to 10	59660 7	SZ-KLB 8	GJI2320131R0001		0.025	30
1 x 16	2 x to 16 10 x to 10	59530 3	SZ-KLB 12	GJI2320071R0013		0.035	30
1 x 35	4 x to 16 12 x to 10	59540 2	SZ-KLB 16	GJI2320072R0017		0.077	30
1 x 35	4 x to 16 20 x to 10	59550 1	SZ-KLB 24	GJI2320073R0016		0.100	30



SZ-KLB 8, 12, 16, 24

SZ-Ktr with KLB

Neutral and protective-conductor terminals with insulation holder for quick fastening onto DIN rails EN 50 022

Neutral with blue insulation holder; type C finger safe, conductor opening closed on one side

Input	Output	Bbn 4012233	Order details		Price 1	Weight 1 piece	Pack unit
mm²	mm²	EAN	Type code	Order code	piece	kg	pc.
1 x 16	6 x 16	57095 4 ①	SZ-N 6/3 C	GHV0360876R0011		0.028	20
1 x 16	6 x 16	57096 1 ①	SZ-N 11/3 C	GHV0360876R0012		0.046	20

Protective conductor with green/yellow insulation holder; type C finger safe, conductor opening closed on one side

Conn. capacity	Lenght	Bbn 4012233	Order details		Price 1	Weight 1 piece	Pack unit
mm²		EAN	Type code	Order code	piece	kg	pc.
1 x 16	6 x 16	57097 8 ①	SZ-PE 6/3 C	GHV0360876R0014		0.028	20

① bbn-No. 4016779

SZ-N6/3

SZ-N11/3

Accessories

for S200, SN201, F200, DS200 and other series

SZ-BP 1

SZ-B

SZ-BP 2

Blanking plates

For device covers with materials of a thickness of 1 to 3 mm, width: 1 module = 17.5 mm; color: grey RAL 7035, white RAL 9001

Input	Output	Bbn 4012233	Order details		Price 1	Weight 1 piece	Pack unit
mm²	mm²	EAN	Type code	Order code	piece	kg	pc.
46/grey	213	06050 4	SZ-BP 1	GHL5301904R0001		0.028	100
46/grey	220	65227 8 a	SZ-BP 12 G	2CDL000001R1220		0.022	50

SZ-BP 12 G

SZ-VP 1500

Sealing plate

Seal-proof locking of stamped-out device covers.
Detachable only from the inside of the device cover.
Can be used for device covers with 1.5 to 3 mm material thickness.

Height of cutout/color	Width	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
mm	mm	EAN	Type code	Order code		kg	pc.
46/grey	1500	60290 2	SZ-VP 1500	GJI9959038R0001		0.366	10

END

End bracket

Prevents lateral shifting of built-in devices mounted on DIN rails according to DIN EN 60 715, 35 x 7.5 mm.

	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	59090 2	END	GJI1001814R0001		0.02	50

SZ-FDT 2

Filling piece

e.g. for heat dissipation of closely mounted devices that generate much heat. Width 8.75 mm, as spacer, two different heights, breakable, for DIN rails according to DIN EN 60 715, 35 x 7.5 mm.

	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
8.75	06070 2	SZ-FST 2	GHL5301908R0002		0.01	25

Accessories

for S200, SN201, F200, DS200 and other series

SZ-FST 2 + SZ-FDT 2

Filling piece

Two different heights, breakable, for DIN rails according to DIN EN 60 715, 35 x 7.5 mm
for MCBs S 220 (3 different heights)

	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
8.75	59410 8	SZ-FST	GJI1480003R0001		0.01	25

① bbn-Nr. 4016779

SZ-FST

Spring catch for mounting devices onto DIN rails (DIN EN 60 715, 35 x 7.5)

	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
for screw type M4	64560 2	SZ-FB 45.53-3	GJI1842013P0003		0.03	50

SZ-FB 45.53-1

SZ-FB 45.53-3

False poles

	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
False pole - 1 module	061304	FP1	16021765		0.01	100
False pole - 2 modules	061403	FP2	16021773		0.014	50
False pole - 4 modules	061502	FP4	16021781		0.022	30
False pole - 6 modules	061601	FP6	16021799		0.031	20
Support for false pole	061700	SFP	16021831		0.012	10

FP

Accessories

for S200, SN201, F200, DS200 and other series

DIN rails

DIN rails (DIN EN 60 715 – 35 x 7.5) for individual installation with 2 screws on an even surface (1 module = 17.5 mm)

	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
for 3 modules	13600 1	DSW 3	GHS2101926R0003		0.018	10
for 4 modules	13610 0	DSW 4	GHS2101926R0004		0.024	10

SZ-TS 7.5 L2

DIN rails DIN EN 60 715, 35 x 7.5, material thickness 1 mm, surface galvanised.

	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
2000	59760 4	SZ-TS 7.5 L2	GJI2322218R0007		0.70	20

Accessories

for S200, SN201, F200, DS200 and other series

S2C-DH

Rotary operating mechanism (usable just with S200 devices)

For the actuation of 2-, 3- or 4pole miniature circuit-breakers in closed distribution boards for driveaxles of 5 or 6 mm^2

	Bbn	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	4016779579605	S2C-DH	GHS2001901R0003		0.175	1
	4053546168235	S2C-DH4	GHS2001901R0004		0.2	1

Note: S2C-DH cannot be used on DS200.
With S2C-DH no other auxiliary element or block can be mounted on the right side of the main device; on the left side you can mount the left mounting signal contact.

OH

Handles

Handle IP 65, 65 x 65 mm, padlockable with max. 3 padlocks (bail diameter 5 - 8 mm), door interlock in ON-position, adjustable*

Color	Suitable for switches	Bbn 6417019	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
Black	OT16...40F	40978 8	OHBS2AJ	1SCA105213R1001			1
Yellow-red	OT16...40F	41226 9	OHYS2AJ	1SCA105296R1001			1
Silver	OT16...40F	41199 6	OHSS2AJ	1SCA105278R1001			1
Grey	OT16...40F	41186 6	OHGS2AJ	1SCA105265R1001			1

OXS6X

Handle IP 65, 65 x 65 mm, padlockable with max. 3 padlocks (bail diameter 5 - 8 mm), door interlock in ON-position

Color	Suitable for switches	Bbn 6417019	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
Black	OT16...40F	41140 8	OHBS2AJ1	1SCA105215R1001			1
Yellow-red	OT16...40F	41227 6	OHYS2AJ1	1SCA105297R1001			1
Silver	OT16...40F	41210 8	OHSS2AJ1	1SCA105279R1001			1
Grey	OT16...40F	41187 3	OHGS2AJ1	1SCA105266R1001			1

* OH_2_J enables selection of MCB behavior when opening panel door (remain switched on or switch off).
OH_2_J1 will cause MCB to switch off when opening panel door.

Axle extension

Type and order numbers are for one piece. For selector type handles. Shaft diameter 6 mm.

Lenght	Suitable for switches	Bbn 6417019	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
85	OT16...40F	36571 8	OXS6X85	1SCA101647R1001		0.02	10
105	OT16...40F	42411 8	OXS6X105	1SCA108043R1001		0.02	10
120	OT16...40F	36578 7	OXS6X120	1SCA101654R1001		0.03	10
130	OT16...40F	36577 0	OXS6X130	1SCA101655R1001		0.03	10
160	OT16...40F	36580 0	OXS6X160	1SCA101656R1001		0.04	10
180	OT16...40F	36583 1	OXS6X180	1SCA101659R1001		0.04	10
250	OT16...40F	36584 8	OXS6X250	1SCA101660R1001		0.05	10
330	OT16...40F	36585 5	OXS6X330	1SCA101661R1001		0.05	10

Accessories

for S200, SN201, F200, DS200 and other series

SZ-ES 68/83

Elevation piece

Compensates for different size of built-in devices with a mounting height of 68 mm and power MCBs of series S500 (83 mm)

	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	53390 9	SZ-ES 68/83	GHV0211425R0001		0.003	100

SA 1

SA 3

SA 2

Locking devices for MCBs, RCDs and switches

The locking devices prevent unauthorized or dangerous operation of circuit breakers' switching lever. An adaptor (SA 1) makes it possible to block the circuit breaker lever with a padlock having cross bar section or either 3 or 6 mm max. For multipole configuration it is sufficient to apply a single lock.
To purchase multiple padlocks that all have the same key use SA 2 i.
To purchase padlocks that each have a different key use SA 2.
The lock adaptor can be used for all MCBs of the S 200, S 280 series, SN201 and DSN201 series, RCCBs F200, RCBOs DS201 as well as for switches E 200.

		Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
locking devices adaptor for padlock bar	3 mm	58760 5	SA 1	GJF1101903R0001		0.004	10
	6 mm	58790 2	SA 1E	GJF1101903R0004		0.004	10
padlock with 2 keys		58770 4	SA 2	GJF1101903R0002		0.02	10
padlock, with 2 identical keys		96940 1	SA 2 i	GJF1109999R0001		0.02	10
trasparent box incl. adaptor and padlock with 3 keys		58780 3	SA 3	GJF1101903R0003		0.05	10

KA 27 H + KA 27 S

Terminal cover KA 27

Provides overall touch protection of live parts. Suitable for installations acc. to DIN EN 50274 (DIN VDE 0660 Part 514) and BGV A2.
End parts can be snapped onto mounting rails EN 60 715, 35 mm. Covers are 486 mm = 27 modules (18 mm each) long. Knockouts for each half module for individualised use.

	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
cover, 1 piece	13630 8	KA 27 H	GHS2101933R0001		0.104	10
end part, 1 piece	13640 7	KA 27 S	GHS2101934R0001		0.027	10

Accessories

for S200, SN201, F200, DS200 and other series

ME

Flanges

	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Flange for rear board fixing 1 module - IP40	304401	ME 1	16219300		0.040	1
Flange for rear board fixing 2 modules - IP40	304500	ME 2	16219318		0.045	1
Flange for rear board fixing 3 modules - IP40	304609	ME 3	16219326		0.055	1
Flange for rear board fixing 4 modules - IP40	304708	ME 4	16219334		0.060	1
Flange for rear board fixing 6 modules - IP40	304807	ME 6	16219342		0.070	1
Flange for rear board fixing 8 modules - IP40	304906	ME 8	16219359		0.080	1

Auxiliary elements for S750 DR series

Auxiliary contact for S750 DR

S750DR-AUX

S750DR-AUX

Electrical data									
Standards		DIN EN 62019 (VDE 0640), IEC/EN 62019							
		DIN EN 60947-5-1 (VDE 0660-200), IEC/EN 60947-5-1							
Conventional free air thermal current Ith		6 A							
Utilisation categories		AC14		AC15		DC12		DC13	
	Ue	400 V	230 V	400 V	230 V	250 V	125 V	60 V	24 V
	Ie (max)	2 A	6 A	2 A	6 A	0.5 A	1.5 A	2 A	4 A
Rated insulation voltage U acc. to IEC/EN 60664-1		690 V AC							
Overvoltage category		IV							
Pollution Degree		3							
Protection degree acc. to IEC/EN 60529		IP20							
Min. switching power DC		5V DC/5 mA, 12V DC/5 mA							
Rated impuls withstand voltage Uimp (1.2/50 µs)		6 kV							
Installation									
Cross-section of	1 conductor	0.75 - 2.5 mm² solid, flexibel with and without insulated ferrule conductors							
	2 conductor	2 x 0.75 - 2 x 2.5 mm² solid, flexibel with and without insulated ferrule							
Tightening torque		0.8 Nm							
Mechanical data									
Vibration resistance according to IEC/ EN 60 068-2-6		5 g, 20 cycles at 5 ...150...5 Hz with 24 V AC/DC, 5 mA, without switching operation							
Mechanical endurance		10,000 ops.							
Pole dimensions (H x D x W)		128 x 77 x 8.7							
Mounting									
		Only 1 auxiliary contact mountable on the right site							
		Not mountable to S751DR/3							

S750DR-AUX

Auxiliary contact S750DR-AUX

Two change-over contacts indicate the contact position of the S750 DR pole(s) independently and potential-free. A test button can be used to verify the correct indication of the contact position without switching the pole(s).

The change-over contacts fulfill the requirements of electrical separation of the main circuit connected to the pole(s).

The S750DR-AUX can be mounted on S750 DR 1-4 pole-devices without tools.

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Auxiliary contact	941891	S750DR-AUX	2CDH700901R0001		0.07	1

Auxiliary elements for MCBs S800 series

Selection table

Combination between auxiliary elements and S800

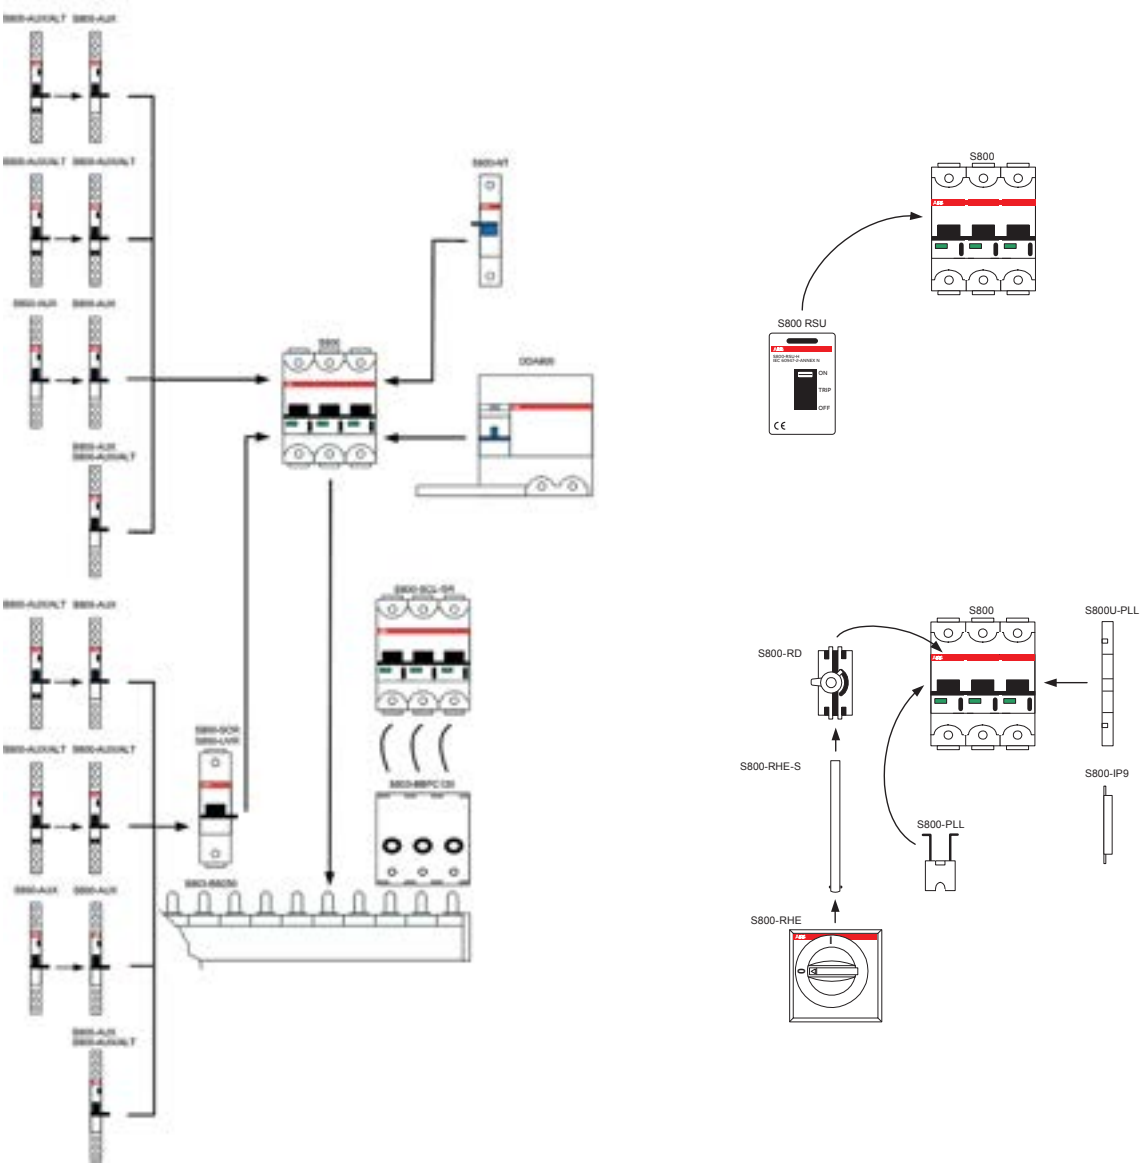

S800-AUX	Auxiliary contact for external display
S800-AUX/ALT	Combined auxiliary and signal contact for the external display
S800-NT	Disconnectable neutral conductor 63A
S800-SOR	Shunt opening release
DDA800	RCD block
S803-BB	Busbar system
S800RD	Rotary drive
S800-RHE	Rotary handle
S800-IP	Intermediate piece
S800-PLL/S800U-PLL	Padlock device/Locking device for American market
S800-UVR	Undervoltage release
S800-SCL-SR	Short-circuit current limiter self resetting
S800-RSU	Remote switching unit (motor operating device)

Auxiliary elements for S800

S800-AUX

S800-AUX

S800-AUX

Auxiliary contact for external display

The S800-AUX auxiliary contact is for electrical display of the operating state of the high performance MCB. Both changeover contacts always switch simultaneously with the live conductor contact and detect if contacts position is ON or OFF (without distinguishing if for manual or overcurrent tripping)

Mode of function of the test button

The test button is operated by a tool and allows the user to simulate the mode of function of the auxiliary contact when switched on without tripping the high performance MCB itself.

Mode of function of the two changeover contacts

- Off position of the high performance MCB — contacts 11–12 and 21–22 closed
- On position of the high performance MCB — contacts 11–14 and 21–24 closed

Mounting ability of the auxiliary contact

- Two S800-AUX auxiliary contacts can be mounted by the user at the left on the high performance MCB.

Auxiliary contact S800-AUX		
Utilisation categories compliant to IEC 60947-5-1		AC15 400/2A, AC15 240/6A, DC13 250/0.55A, DC13 125V/1.1A, DC13 60V/2A, DC13 24V/4A
Rated values compliant to UL 489		125VAC/6A, 250VAC/5A, 24VDC/4A, 125VDC/0.3A, 250VDC/0.15A
Conventional free air thermal current I_{th}	A	6
Minimum operational current I_{min}	mA	3
Minimum operational voltage U_{min}	V	24
Rated insulation voltage U_i	V	690
Number of contacts		2
Rated impulse withstand voltage U_{imp}	kV	6
Power loss	W	0.260 per contact at 6A
Pollution degree		3
Standard		IEC 60947-5-1 / UL 489
Contact function		Changeover contact
Connection C_u	mm^2	1 x 2.5 2 x 1.5 14 AWG
Tightening torque	Nm	1
AC/DC feed		any
Mounting on DIN top hat rail		EN 60715
Protection category		IP20
Permissible operating ambient temperature	°C	-25 ... +60
Storage temperature	°C	- 40 ... +70
Mech. lifetime of device		6000 switching cycles
I_{cu}	A	1000
Vibration resistance		IEC 60068-2-6; EN 61373 Cat.1/Class B 5g, 20 frequency cycle 5 ... 150 ... 5Hz at 24V AC/DC, 5mA short-term interruption <10ms
Dimensions (H x L x W)	mm	95 x 82.5 x 9

	GTIN 761227	**Order details**		**Price 1**	**Weight 1 piece**	**Pack unit**
Article	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
Auxiliary contact	1206802	S800-AUX	2CCS800900R0011		0.05	1

Auxiliary elements for S800

S800-AUX/ALT

S800-AUX/ALT

S800-AUX/ALT
Combined auxiliary and signal contact for the external display
The S800-AUX/ALT combined auxiliary and signal contact is used to display the operating state of S800 (AUX) and to provide indication if the MCB has tripped due to a failure (SIG). The AUX auxiliary contact always switches simultaneously with the live conductor contact and detect if contacts position is ON or OFF (without distinguishing if for manual or overcurrent tripping)

The ALT signal contact detects if the MCB has tripped due to a failure.

Mode of function of the test button
The test button is operated by a tool and allows the user to simulate the mode of function of the combined auxiliary and signal contact when switched on without tripping the high performance MCB itself.

Mode of function of the ALT reset button
The reset button, which can be used at will, resets the ALT signal contact after a tripping. The high performance MCB is switched on independent of the state of the ALT signal contact.

Mode of function of the AUX changeover contact

• Off position of the high performance MCB	Contact 11–12 closed
• On position of the high performance MCB	Contact 11–14 closed

Mode of function of the ALT changeover contact

• No ALT tripping	Contact 95–96 closed
• ALT tripping	Contact 95–98 closed

Auxiliary elements for S800

S800-AUX/ALT

S800-AUX/ALT

Technical data

Combined auxiliary and signal contact S800-AUX/ALT		
Utilisation categories compliant to IEC 60947-5-1		AC15 400/2 A, AC15 240/6 A DC13 250/0.55 A DC13 125 V/1.1 A DC13 60 V/2 A DC13 24 V/4 A
Rated values compliant to UL 489		125 VAC/6 A 250 VAC/5 A 24 V DC/4 A 125 V DC/0.3 A 250 V DC/0.15 A
Conventional free air thermal current I_{th}	A	6
Minimum operational I_{min}	mA	3
Minimum operational voltage U_{min}	V	24
Rated insulation voltage U_i	A	690
Number of contacts		2 (1x AUX, 1x AUX/ALT)
Rated impulse withstand voltage U_{imp}	kV	6
Power loss	W	0.260 per contact at 6A
Pollution degree		3
Standard		IEC 60947-5-1 / UL 489
Contact function		Changeover contact
Connection C_u	mm^2	1 x 2.5 2 x 1.5 14 AWG
Tightening torque	Nm	1
AC/DC feed.		any
Mounting on DIN top hat rail		EN 60715
Protection category		IP20
Permissible operating ambient temperature	°C	-25 ... +60
Storage temperature	°C	-40 ... +70
Mech. lifetime of device		6000 switching cycles
I_{cu} with S450E	A	1000
Vibration resistance		IEC 60068-2-6; EN 61373 Cat.1/Class B 5 g, 20 frequency cycle 5 ... 150 ... 5 Hz at 24 V AC/DC, 5 mA short-term interruption <10 ms
Dimensions (H x L x W)	mm	95 x 82.5 x 9

	GTIN 761227	**Order details**		**Price 1**	**Weight 1 piece**	**Pack unit**
Article	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
Auxiliary/signal contact	1206819	S800-AUX/ALT	2CCS800900R0021		0.05	1

Auxiliary elements for S800

S800-NT

S800-NT

S800-NT
Disconnectable neutral conductor 63 A
The S800 is force-opened before actuating the disconnector. Used in system with the neutral where 1P and 3P devices want to be installed (instead of using 2P and 4P)

Mounting ability of the S800-NT neutral conductor
The neutral conductor can be mounted by the user at the right on the high performance MCB up to 63A.

	GTIN 761227	Order details		Price 1	Weight 1 piece	Pack unit
Article	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
Disconnectable neutral conductor 63 A	1208196	S800-NT	2CCS800900R0061		0.12	1

Auxiliary elements for S800

S800-RSU system

S800-RSU

S800-RSU-H IEC version
S800W-RSU World version
Remote Switching Units for High Performance MCB
The S800-RSU makes the use of S800 even more convenient. Driven by a brushless high precision DC motor, it provides remote control of S800 with fast and controlled opening of the circuit when required, and remote reclosing in total safety

Mounting ability
The S800-RSU is mountable on any multipole S800 High Performance MCB. Wiring and operation is feasible on field. The connection has to be done by a 10-pole Micro Fit 3.0 (not included in delivery). S800-RSU operated with standard MDRC pushbuttons and indicator lights or can be done via programmable logic controllers (PLCs).

Switching times

OFF –> ON from signal to contact closing	<<500 ms
ON –> OFF from signal to contact opening	<<250 ms
TRIP –> OFF –> ON from signal to contact closing	<<1500 ms

For differing requirements, please contact your local ABB partner

Safety Intelligence
- When detecting manual use, inputs are deactivated for 10 seconds
- If the spindle is rotated more than 360°, all outputs become active
- Manual switch off via lever is possible (S803, S804)
- Manual switch on via lever is not possible (S802)
- RSU is locked for five minutes after three switching attempts leading to a trip
- Mechanical fixation via lock slider blocking the spindle

S800-RSU-H-CP

S800-RSU-CP
S800-RSU cable incl. 10-pole Micro Fit 3.0 plug

Length of cable:	3 m
Cross section:	10 x 0.5 m²

Temperature range

moving state:	–5 ºC ... +70 ºC
fixed state:	–30 ºC ... +80 ºC
Rated voltage:	300 V
Conductor resistance:	39.0 Ω/km
Approvals:	S+, UL

Auxiliary elements for S800

S800-RSU system

S800-RSU

Technical data

S800-RSU-H IEC version S800W-RSU World version Remote Switching Units for High Performance MCB		
Operating Voltage		24 V DC
Current Consumption I_{rms}	A	2.5
Stand-by Current	mA	< 50
Switching Time OFF-ON	ms	< 500
Switching Time ON-OFF	ms	< 250
Ambient Operation Temperature	°C	-25 ... 70
Switching Cycles over Lifetime		10.000
Standard		S800-RSU-H IEC60947-2 Annex N S800W-RSU UL489
Shock resistance acc. to IEC/EN 61373	5g / 30ms	Cat 1 / Class B
Protection		IP20
Weight	g	300
Connection		10 pole Micro Fit 3.0
Dimensions (H x L x W)	mm	80,7 x 70 x 54

	GTIN 761227	**Order details**		**Price 1**	**Weight 1 piece**	**Pack unit**
Article	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
Remote Switching Unit* S800-RSU-H	1411244	S800-RSU-H	2CCS800900R0501		0.30	1
Remote Switching Unit* S800W-RSU	1411169	S800W-RSU	2CCS800900R0511		0.30	1
S800-RSU cable incl. plug 3 meters cable 0,5 mm² (AWG20) incl. 10-pole Micro Fit 3.0 plug	1412869	S800-RSU-CP	2CCS800900R0541		0.35	1
10-pole Micro Fit 3.0 plug	1412845	S800-RSU-P	2CCS800900R0551		0.00	1

* High performance circuit breaker is not included in delivery

Auxiliary elements for S800

S800-SOR

S800-SOR

S800-SOR
Shunt opening release
The S800-SOR allows remote release of S800 using an electrical impulse, for a fast and controlled opening of the circuit when required.

Mounting ability of the S800-SOR operating current release
The S800-SOR can be mounted by the user at the left side of the high performance MCB.

Shunt release S800-SOR

		S800-SOR12	S800-SOR24	S800-SOR130	S800-SOR250	S800-SOR400
Rated operational voltage U_e	VAC/DC	12	24	48 ... 130	110 ... 250	220 ... 400
Operating range	% U_e	70 ... 110	70 ... 110	70 ... 110	70 ... 110	70 ... 110
Rated insulation voltage U_i	V	690	690	690	690	690
Coil pull in consumption	W/VA	15.5	16.6/17*	41.9 ... 307.3 42 ... 310*	23 ... 119 20 ... 105*	45 ... 148.1
Rated frequency	Hz	DC; 50/60	DC; 50/60	DC; 50/60	DC; 50/60	DC; 50/60
Pollution degree		3	3	3	3	3
Standard		IEC 60947-2/ UL 489	IEC 60947-2/ UL 489	IEC 60947-2/ UL 489	IEC 60947-2/ UL 489	IEC 60947-2/ UL 489
Connection C_u	mm^2	1 ... 25 (14-2 AWG) strand 1 ... 35 (14-3 AWG) cable	1 ... 25 (14-2 AWG) strand 1 ... 35 (14-3 AWG) cable	1 ... 25 (14-2 AWG) strand 1 ... 35 (14-3 AWG) cable	1 ... 25 (14-2 AWG) strand 1 ... 35 (14-3 AWG) cable	1 ... 25 (14-2 AWG) strand 1 ... 35 (14-3 AWG) cable
Tightening torque	Nm	3.5	3.5	3.5	3.5	3.5
AC/DC supply		any	any	any	any	any
Mounting on DIN top hat rail		EN 60715	EN 60715	EN 60715	EN 60715	EN 60715
Protection category		IP20 IP40 (actuating end only)	IP20 IP40 (actuating end only)	IP20 IP40 (actuating end only)	IP20 IP40 (actuating end only)	IP20 IP40 (actuating end only)
Permissible operating ambient temperature	°C	-25 ... +60	-25 ... +60	-25 ... +60	-25 ... +60	-25 ... +60
Storage temperature	°C	-40 ... +70	-40 ... +70	-40 ... +70	-40 ... +70	-40 ... +70
Vibration resistance		IEC 60068-2-6; EN 61373 Cat.1/ Class B	IEC 60068-2-6; EN 61373 Cat.1/ Class B	IEC 60068-2-6; EN 61373 Cat.1/ Class B	IEC 60068-2-6; EN 61373 Cat.1/ Class B	IEC 60068-2-6; EN 61373 Cat.1/ Class B
Dimensions (H x L x W)	mm	95 x 82.5 x 18	95 x 82.5 x 18	95 x 82.5 x 18	95 x 82.5 x 18	95 x 82.5 x 18

	GTIN 761227	Order details		Price 1	Weight 1 piece	Pack unit
Shunt operation release	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
12 VAC/DC	1212070	S800-SOR12	2CCS800900R0201		0,15	1
24 VAC/DC	1208318	S800-SOR24	2CCS800900R0191		0.15	1
48...130 VAC/DC	1208349	S800-SOR130	2CCS800900R0221		0.15	1
110...250 VAC/DC	1208332	S800-SOR250	2CCS800900R0211		0.15	1
220...400 VAC/DC	1208356	S800-SOR400	2CCS800900R0231		0.15	1

Auxiliary elements for S800

S800-UVR

S800-UVR

S800-UVR

Undervoltage release

The S800-UVR undervoltage release can be used as an emergency-stop cut-as by use of suitable emergency stop buttons. The undervoltage release switches the power supply to the high performance MCB off in case of a failure or if the value falls below 0.7 x Un. After tripping, the high performance MCB can be switched back on as soon as the voltage is over 0.85 x U_n.

Mounting ability of the S800-UVR undervoltage release

The S800-UVR can be mounted by the user at the left side of the high performance MCB.

Undervoltage release S800-UVR

		S800-UVR36	S800-UVR60	S800-UVR130	S800-UVR250
Rated operational voltage U_e	VAC/DC	24 ... 36	48 ... 60	110 ... 130	220 ... 250
Operating range					
open	% U_e	35 ... 70	35 ... 70	35 ... 70	35 ... 70
closed	% U_e	85	85	85	85
Rated insulation voltage U_i	V	690	690	690	690
Power loss of coil when attracted	W/VA	1.11 ... 1.14/1.2*	1.14 ... 1.25/1.3*	1.3 ... 1.41/1.4*	1.71 ... 1.91/1.9*
Rated frequency	Hz	DC; 50/60	DC; 50/60	DC; 50/60	DC; 50/60
Pollution degree		3	3	3	3
Standard		IEC 60947-2 / UL 489	IEC 60947-2 / UL 489	IEC 60947-2 / UL 489	IEC 60947-2 / UL 489
Connection C_u	mm^2	1 ... 25 (14-2 AWG) strand 1 ... 35 (14-3 AWG) cable	1 ... 25 (14-2 AWG) strand 1 ... 35 (14-3 AWG) cable	1 ... 25 (14-2 AWG) strand 1 ... 35 (14-3 AWG) cable	1 ... 25 (14-2 AWG) strand 1 ... 35 (14-3 AWG) cable
Tightening torque	Nm	3.5	3.5	3.5	3.5
AC/DC supply		any	any	any	any
Mounting on DIN top hat rail		EN 60715	EN 60715	EN 60715	EN 60715
Protection category		IP20 IP40 (actuating end only)	IP20 IP40 (actuating end only)	IP20 IP40 (actuating end only)	IP20 IP40 (actuating end only)
Permissible operating ambient temperature	°C	-25 ... +60	-25 ... +60	-25 ... +60	-25 ... +60
Storage temperature	°C	-40 ... +70	-40 ... +70	-40 ... +70	-40 ... +70
Vibration resistance		IEC 60068-2-6; EN 61373 Cat.1/Class B	IEC 60068-2-6; EN 61373 Cat.1/Class B	IEC 60068-2-6; EN 61373 Cat.1/Class B	IEC 60068-2-6; EN 61373 Cat.1/Class B
Dimensions (H x L x W)	mm	95 x 82.5 x 18	95 x 82.5 x 18	95 x 82.5 x 18	95 x 82.5 x 18

	GTIN 761227	Order details		Price 1	Weight 1 piece	Pack unit
Undervoltage release	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
24...36 VAC/DC	1208363	S800-UVR36	2CCS800900R0241		0,15	1
48...60 VAC/DC	1208370	S800-UVR60	2CCS800900R0251		0.15	1
110...130 VAC/DC	1208387	S800-UVR130	2CCS800900R0261		0.15	1
220...250 VAC/DC	1208394	S800-UVR250	2CCS800900R0271		0.15	1

Auxiliary elements for S800

S800-SCL-SR

S800S-SCL-SR

S800-SCL-SR

Self-resetting short-circuit current limiter		S800S-SCL-SR	S803W-SCL-SR
Rated operational current I_e	A	32, 63, 100	
Pole		1, 2, 3	3
Rated operational voltage U_e (AC) according to IEC 60947-2 50/60 Hz	V	400/690	690
(AC) according to UL 508 50/60 Hz	V	-	600
Rated insulation voltage U_i	V	690	690
Rated impulse withstand voltage U_{imp}	kV	8	8
Rated ultimate short-circuit breaking capacity			
$I_{cu} = I_{cs}$ according to IEC 60947-2 *			
(AC) 50/60 Hz 240/415 V	kA	100	100
(AC) 50/60 Hz 254/440 V	kA	100	100
(AC) 50/60 Hz 289/500 V	kA	65	65
(AC) 50/60 Hz 400/690 V	kA	50	50
Short-circuit rating according to UL 508 *			
(AC) 50/60 Hz 480 V	kA	-	65
(AC) 50/60 Hz 600 V	kA	-	65
Rated frequency	Hz	50/60	50/60
Mounting position		any	any
Connections C_u	mm^2	1 … 50 rigid (solid/ stranded)	1 … 50 rigid (solid/ stranded)
	mm^2	1 … 70 flexible	1 … 70 flexible
	AWG		14–1
Tightening torque	Nm	3.5	3.5
	in. lbs.		31
Feeding		optional	optional
Mouting on DIN top hat rail		EN 60715	EN 60715
Ambient air temperature	°C	-40 … +70	-40 … +70
	°C	-40 … +85	-40 … +85
Degree of protection		IP20	IP20
Classification acc. to NF F 16-101, NF F 16-102		I3, F2	I3, F2
Damp Heat		IEC 60068-2-30, 55 °C / 95 % r.h.	IEC 60068-2-30, 55 °C / 95 % r.h.
Vibration		IEC 60068-2-6, 5–10 Hz / 3 mm and 10–500 Hz / 2 g at 0.5 x I_e	IEC 60068-2-6, 5–10 Hz / 3 mm and 10–500 Hz / 2 g at 0.5 x I_e
Random Vibration		IEC 60068-2-64, 5–500 Hz / 2 g at 0.5 x I_e	IEC 60068-2-64, 5–500 Hz / 2 g at 0.5 x I_e
Resistance to climatic conditions		IEC 60068-2-1 /-2-2 /-2-30	IEC 60068-2-1 /-2-2 /-2-30
Standard		IEC 60947-2 IEC 60947-4-1	IEC 60947-2 IEC 60947-4-1 UL 508, CSA 22.2 No. 14

* Valid only for approved combinations

Please refer to section B of the catalogue

Auxiliary elements for S800

S800-SCL-SR

S800S-SCL-SR

S803HV-SCL-SR in combination with S803HV-K		
General data		
Standard		IEC 60947-2
Poles		3
Rated frequency f	Hz	50/60
Data acc. to IEC 60947-2		
Rated operational voltage U_e	V	AC 580/1000
Rated operational current I_n	A	32, 63, 100
Rated ultimate short-circuit breaking capacity I_{cu}	kA	15
Rated service short-circuit capacity I_{cs}	kA	10
Rated insulation voltage U_i	V	AC 1000
Rated impulse withstand voltage U_{imp}	kV	8
Mechanical data		
Housing		Material group I, RAL 7035
Toggle		black, lockable
Protection degree acc. to IEC / EN 60529		IP20; IP40 (actuating side only)
Classification acc. to NF F16-101, NF F 16-102		I3, F2
Classification acc. to IEC 61373 (shock and vibration)		Cat. 1, Class B
Shock resistance acc. to IEC / EN 60068-2-27		Test Ea: 5 g / 30 ms
Vibration resistance acc. to IEC / EN 60068-2-6		5g / 30ms, Cat 1, Class B; Test Fc; 5 - 13.2Hz /1 mm 13.2 - 100Hz / 0.7g with load 80% x I_e
Environmental conditions (damp heat) acc. to IEC / EN 60068-2-30		12+12 cycle with 55 °C / 90 - 96 % RH and 25 °C / 95 - 100 % RH
Environmental conditions (dry heat) acc. to IEC / EN 60068-2-2		16 hours 55 °C / 2 hours 70 °C / 55 % RH
Ambient temperature	°C	-25 ... +60
Storage temperature	°C	-40 ... +70
Installation		
Terminal		Failsafe cage terminal
Connection (top/bottom) – C_u only	mm^2	1 ... 50 solid / stranded 1 ... 70 flexible
Tightening torque	Nm	3.5
Screwdriver		POZI 2
Mounting		EN 60715
Mounting position		any
Supply side		any
Dimension and weight		
Pole dimension (H x L x W)	mm	142 x 76.5 x 26.5
Pole weight	kg	0.25

Auxiliary elements for S800

S800-SCL-SR

S803S-SCL100-SR



Self-resetting short-circuit limiter IEC version [A]	GTIN 7612271 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
32	412012	S801S-SCL32-SR	2CCS801901R0539		0.25	1
63	412036	S801S-SCL63-SR	2CCS801901R0599		0.25	1
100	411992	S801S-SCL100-SR	2CCS801901R0639		0.25	1
32	412074	S802S-SCL32-SR	2CCS802901R0539		0.5	1
63	412098	S802S-SCL63-SR	2CCS802901R0599		0.5	1
100	412050	S802S-SCL100-SR	2CCS802901R0639		0.5	1
32	411930	S803S-SCL32-SR	2CCS803901R0539		0.75	1
63	411947	S803S-SCL63-SR	2CCS803901R0599		0.75	1
100	411954	S803S-SCL100-SR	2CCS803901R0639		0.75	1

S803W-SCL100-SR



Self-resetting short-circuit limiter World version (IEC/UL) [A]	GTIN 7612271 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
32	412319	S803W-SCL32-SR	2CCS803917R0539		0.75	1
63	412326	S803W-SCL63-SR	2CCS803917R0599		0.75	1
100	412302	S803W-SCL100-SR	2CCS803917R0639		0.75	1

S803HV-SCL100-SR

Self-resetting short-circuit limiter [A]	GTIN 7612271 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
32	37008	S803HV-SCL32-SR	2CCF019047R0001		0.75	1
63	37107	S803HV-SCL63-SR	2CCF019048R0001		0.75	1
100	37114	S803HV-SCL100-SR	2CCF019049R0001		0.75	1

Auxiliary elements for S800

S800-RD

S800-RD

S800-RD
Rotary drive
The rotary drive for 2–4 pole devices can be delivered for assembly on the switching field door. Switching is effortless due to the ergonomic design of the swivel lever. It is equipped with a lock for the OFF position that prevents switching on of the S800 high performance MCB.
The slot hole of the lock can accept up to 3 padlocks with lug diameters of 7 mm (not included in delivery). Operation of the trigger and a view of the characteristics are not prevented Additionally, a rotary drive can also be supplied to switch machines; it has a red grip on a yellow background.
The rotary drive on the switching field door is comprised of the following three components:

- Rotary handle S800-RHE-H, -EM
- Axle (500 mm) S800-RHE-S

S800-RD

Rotary drive adapter for 2- to 4-pole high performance MCB	GTIN 76122712 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
Rotary drive	08172	S800-RD	2CCS800900R0041		0.08	1

S800-RHE-H

Anthracite/Standard rotary handle for door assembly	GTIN 80156446 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
Anthracite rotary handle	25571	S800-RHE-H	1SDA060150R0001		0.02	1

S800-RHE-EM

Red/Emergency rotary handle for door assembly	GTIN 80156446 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
Red rotary handle	25771	S800-RHE-EM	1SDA060151R0001		0.02	1

S800-RHE-S

Axle extension Rotary drive-rotary handle 6x6mm	GTIN 80156446 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
Axial extension 500mm	26242	S800-RHE-S	1SDA060179R0001		0.2	1

IP54 kit for door mounting	GTIN 80156446 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
IP54 Kit	26259	S800-RHE-IP54	1SDA060180R0001		0.08	1

Auxiliary elements for S800

S800-IP9, S800-PLL, S800U-PLL

S800-IP9

S800-IP9

Intermediate piece

The S800-IP9 intermediate piece fits the profile of the high performance MCB and is used to fill in empty device slots. Thanks to its width of just 9mm, the slots of all devices of the S800 range can be expanded using this intermediate piece.

	GTIN 76122712	Order details		Price 1	Weight 1 piece	Pack unit
Intermediate piece 9 mm	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
Intermediate piece 9 mm	08202	S800-IP9	2CCS800900R0031		0.01	1

S800-PLL

S800-PLL

Padlock device

The S800-PLL padlock device safely prevents unintentional switching on and off. Simply insert the lug of the padlock device through the borehole on the high performance MCB and lock with a padlock with lug diameter Ø 4 mm (not included in delivery). Even when the high performance MCB is secured with an padlock device against unintentional switching off, tripping remains possible in case of overload or short-circuit by the S800-SOR, S800-UVR and DDA800.

	GTIN 76122712	Order details		Price 1	Weight 1 piece	Pack unit
Padlock lever lock with hasp	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
Padlock lever lock with hasp 4 mm	08189	S800-PLL	2CCS800900R0051		0.12	10

S800U-PLL

S800U-PLL

Locking device – for the American market

The S800U-PLL locking device prevents unintentional switch-on or off of the S800U high performance MCB, or switch on/off by third parties. It is mounted at the side of the high performance MCB and can only be removed using a special tool. A standardised American padlock (not included in delivery) is hung onto the round recess on the locking device, which can be secured by max six locks. Of course, tripping is possible by the S800-SOR or S800-UVR in case of overload or short-circuit.

	GTIN 76122712	Order details		Price 1	Weight 1 piece	Pack unit
UL locking device*	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
UL locking device	15057	S800U-PLL	2CCS800017R0001		0.02	1

*High performance circuit breaker and lockout tag are not included in delivery

Auxiliary elements for S800

S800-CT, -RT, S800-ILS

S800-CT

S800-RT

S800-CT, -RT

Interchangeable adapter kit

The S800 interchangeable adapter kit allows the cable clamp – ring terminal connections to be exchanged. Ring terminal connection -> Cage Terminal connection

The following is included in the S800-CT replaceable interchangeable adapter kit:

- Cage terminal
- Insulator

Cage Terminal connection -> ring terminal connection

The following is included in the S800-RT replaceable interchangeable adapter kit:

- Nut, insulation nut – cable lug, Allen screw
- Insulator with 25 mm insulation walls

Interchangeable adapter kit	GTIN 76122712 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
Cage terminal	08264	S800-CT2125	2CCS800900R0181		0.03	2
Cage terminal	08233	S800-CT4125	2CCS800900R0151		0.06	4
Ring terminal connection	08240	S800-RT2125	2CCS800900R0161		0.03	2
Ring terminal connection	08219	S800-RT4125	2CCS800900R0131		0.06	4

S800-ILS

Identification labelling system

The individual identification labelling system for ILS legend plates is a DIN A5 polyester foil for inkjet and laser printers with high temperature resistance (if a laser printer is used please check whether self-sticking foils with a thickness of 250 µm can be printed with it). The 3M™9471 LE adhesive backing is UL-approved with Appl. No. MH 11410. The single plates are butt-cut on one side. Can be manually labelled with ink, pen, pencil and felt pen.

S800-ILS	GTIN 76122712 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
Identification labeling system 168 x 6 x 11.5 mm	08271	S800-ILS	2CCS800900R0121		0.01	1

Auxiliary elements for S800

S802-LINK

S802-LINK50

S802-LINK50
Pole connector up to 50 A
The pole connector S802-LINK50 can be used up to 50 A.

S802-LINK125

S802-LINK125
Pole connector up to 125 A
The pole connector S802-LINK125 can be used up to 125 A.

Pole connector S802-LINK125

Rated insulation voltage U_i	V	DC 1500
Tightening torque	Nm	3.5
	in. lbs.	31

Combination S800PV-SP with S802-LINK50 / -LINK125 (devices mounted separately)

I_e [A]	10°C	15°C	20°C	25°C	30°C	35°	40°C	45°C	50°C	55°C	60°C
10	11.6	11.4	11.2	11.0	10.7	10.4	**10.0**	9.6	9.3	9.0	8.7
13	15.1	14.9	14.6	14.3	13.9	13.5	**13.0**	12.5	12.1	11.7	11.3
16	18.6	18.2	17.9	16.6	17.1	16.6	**16.0**	15.4	14..9	14.4	13.9
20	23.2	22.8	22.4	22.0	21.4	20.8	**20.0**	19.2	18.6	18.0	17.4
25	29.0	28.5	28.0	27.5	26.8	26.0	**25.0**	24.0	23.3	22.5	21.8
32	37.1	36.5	35.8	35.2	34.2	33.3	**32.0**	30.7	29.8	28.8	27.8
40	46.5	45.6	44.8	44.0	42.8	41.6	**40.0**	38.4	37.2	36.0	34.8
50	58.1	57.0	56.0	55.0	53.5	52.0	**50.0**	48.0	46.5	44.6	42.9
63	69.9	68.8	67.6	66.5	65.3	64.2	**63.0**	60.5	58.1	55.7	53.5
80	88.8	87.3	86.0	84.4	82.9	81.5	**80.0**	76.8	73.7	70.8	67.9
100	111.0	109.2	107.3	105.6	103.7	101.8	**100.0**	96.0	92.2	88.5	84.9
125	138.8	136.5	134.2	131.9	129.6	127.3	**125.0**	116.3	108.1	100.5	93.5

These values are valid for the combination with S802-LINK50

Combination S800PV-SD with S802-LINK50 / -LINK125 (devices mounted separately)

I_e [A]	10°C	15°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C	55°C	60°C
32	32	32	32	32	32	32	32	32	32	32	32
63	63	63	63	63	63	63	63	63	63	63	63
125	125	125	125	125	125	125	110	110	100	100	100

The tables are based on measurements using cable as stated in IEC 60947-2. Any derivation from these cable diameters and lengths might lead to higher temperatures.

Therefore ABB recommends to perform temperature measurements to verify the real maximum temperature in the application.

	GTIN 7612271	Order details		Price 1	Weight 1 piece	Pack unit
Pole connector	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
Pole connector 50 A	211295	S802-LINK50	2CCS800900R0411		0.03	10
Pole connector 125 A	419103	S802-LINK125	2CCS800900R0562		0.15	2

Auxiliary elements for S800

S800 Busbar system

S800 Busbar system

S800 Busbar system

The S800 busbar system is comprised of:

S804-BBPC120	120 mm² feed block, 4-pole
S804-BB250	250 A busbar, 4-pole and neutral with 24 contacts pins
S804-BB6	250 A busbar, 4-pole with 6 contacts pins
S803-BB250	250 A busbar, 3-pole with 24 terminal lugs and 2 end caps
S803-BBPC120	120 mm² feed block, 3-pole
S800-BBIC	Optional contact-protection cap for exposed terminal lugs
S800-END	Optional end cap

The busbar, which can be shortened in length by the user, ensures the safe and rational connection of the S800 high performance MCB. A cable cross-section of up to 120 mm² can be connected at the feed block.

Busbar S803-BB250/S804-BB250

Max. rated current I_n		
Side feed	A	125
Middle feed	A	250
Conditional rated short-circuit current	kA eff	100 with T_{max} connected upstream
Poles		3/4
Rated operational voltage U_e		
(AC) 50/60 Hz	V	400/690
Rated insulation voltage U_i	V	690
Rated impulse withstand voltage U_{imp}	kV	8
Rated frequency	Hz	50
Standard		EN/IEC 60439-2
Material of rails		E-C_u 58 half-standard, rolled F25
Material of insulation profile		Material group I; UL94 V-0
Material of end caps		Material group I; UL94 V-0 Free of halogen and phosphate
Busbar cross sections	mm²	60
Overvoltage category		III
Pollution degree		2

Feed block S803-BBPC120/S804-BBPC120

Max. rated current I_n	A	250
Poles		3/4
Rated operational voltage U_e	V	400/690
Rated frequency	Hz	50
Standard		EN/IEC 60439-2
Material of terminals		Material group I
Housing material		Material group I; UL94 V-0, Free of halogen and phosphate
Tightening torque		-
on feed side	Nm	19
on busbar side	Nm	3
Connection cross-section	mm²	1.6...120
Pollution degree		2

Auxiliary elements for S800

S800 Busbar system

S803-BB250

Busbar	GTIN 76122712 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
Busbar 250 A with 24 contacts pins, 3P	08288	S803-BB250	2CCS800900R0071		1.05	1

S804-BB250

Busbar	GTIN 76122714 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
Busbar 250 A with 24 contacts pins, 3P+N	41807	S804-BB250	2CCF019568R0001		2	1
Busbar 250 A with 6 contacts pins, 3P	41302	S803-BB6	2CCF019562R0001		0.375	1

S804-BBPC120

Feed block	GTIN 7612271 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
Feed block 4p 120 mm²	441807	S804-BBPC120	2CCF019569R0001		0.58	1
Feed block 3P 120 mm²	1208301	S803-BBPC120	2CCS800900R0101		0.46	1

S800-BBIC

Contact-protection cover	GTIN 76122712 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
Contact-protection cover	08967	S800-BBIC	2CCS800900R0081		0.02	12

End cap	GTIN 76122712 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
End cap	08295	S800-END	2CCS800900R0091		0.04	10

Auxiliary elements for S800

27mm wide universal adapter S800

27mm wide universal adapter S800

27mm wide universal adapter to mount S800 MCB on SMISSLINE TP system
The universal adapter with the new 9mm dummy housing is specially designed for the High performance breaker S800. This allows to have a 27mm adapter on the SMISSLINE TP busbar system. The S800 High performance MCB can be easily mounted and wired on the universal adapter. The complete unit can be clicked on to the plug-in socket system quickly and safely. The input wiring is then already finished.

- Max. Incoming 400A (T5/XT5) rated conditional short-circuit current I_{cc} 40kA (415V) with S800S
- Time-saving mounting of S800 MCB units up to 30% faster than conventional DIN rail mounting
- Input wiring is already integrated in the SMISSLINE plug-in socket system

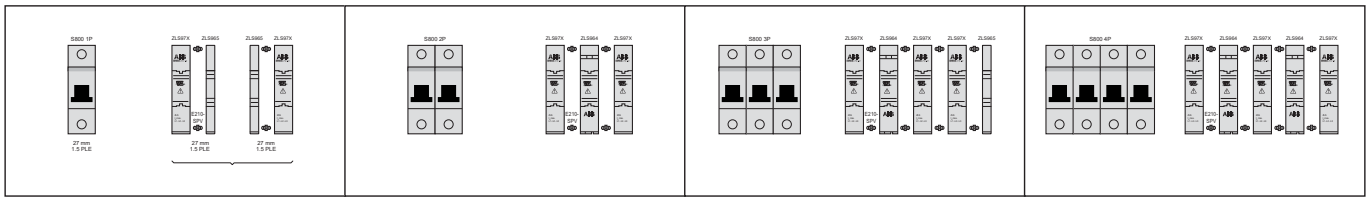

Smissline adapter for S800 (up to 50 A)	GTIN 761227 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
L1 or L2 or L3 wire bottom	1444716	ZLS973	2CCA180556R0001		0.024	10
L1 or L2 or L3 wire bottom	1444716	ZLS973	2CCA180556R0001		0.024	10
N wire top	1444723	ZLS972N	2CCA180557R0001		0.024	10
N wire bottom	1444730	ZLS973N	2CCA180558R0001		0.024	10
Dummy housing						
9mm dummy housing	1501440	ZLS965	2CCA180545R1001			5
18mm dummy housing	1444556	ZLS964	2CCA180550R0001		0.011	10
Connection piece (2 connectors are needed to connect)	1414801	E210-SPV	2CCC703715R0001		0.050	30

Auxiliary elements for S800

27mm wide universal adapter S800

27mm wide universal adapter S800

Unifix H

The Unifix H System with feed module up to 400 A provides the user a high standardised design of energy distribution. The wide range of assembly and adapter combinations which are also available for the S800 range increase flexibility allowing for compact and cost-effective design of the electrical distribution network. See dedicated System pro E power offering

The following adapters are available for the S800 range:

- ED2557 L1 ≤32 A
- ED2558 L2 ≤32 A
- ED2559 L3 ≤32 A
- ED2560 N ≤32 A
- ED2551 L1 125 A
- ED2552 L2 125 A
- ED2553 L3 125 A
- ED2554 N 125 A
- ED2550 filler

Plug-in systems

UNIFIX rapid wiring system

UNIFIX – Rapid Wiring System
UNIFIX makes bench pre-cabling possible, with installation in the switchboard only carried out at a later time, without any limit to the types or combination of apparatus you may need to install…and this becomes even easier, thanks to the rigid coupled connectors, standardized for the different types of apparatus.
Unifix H allows modular and moulded-case circuit-breakers up to 250A to be mounted on an apparatus frame, which can be connected directly to the rear busbar system. This means many fewer conductors circulating inside the switchboard with considerable advantages in terms of space taken up, connections needed to be checked, and cabling times, with consequent cost savings.
Unifix L means traditional wire cabling on the supply side of the circuit-breakers can be replaced. It is thanks to the characteristics of its connections that cabling can be done rapidly and without any possibility of error, obtaining a more essential switchboard without conductors and cabling ducts around. Flexibility is its strong point: several independent circuits can be realized on the same DIN rail, and circuit-breakers of different types, with different polarity and characteristics can be mounted.

Customer Benefits with UNIFIX
Wiring Time The use of Unifix reduces considerably wiring time.
Use of Standard Devices Unifix can be applied to all standard versions of ABB Sace modular devices, Tmax T1 - T2 - T3 - XT1 - XT3 moulded-case circuit breakers
Flexible Unifix has variable modular capacity, it is possible to place both circuit-breakers with different polarities side by side on the same line and auxiliary elements.
Reduce Space Space taken up by Unifix is extremely low

For order codes and technical details please check the Distribution Switchgear Catalogue 1STC008001D0203, pages 3/19-20, 4/18-19-20, 5/50-51-52

Plug-in systems

UNIFIX rapid wiring system

—
Unifix H

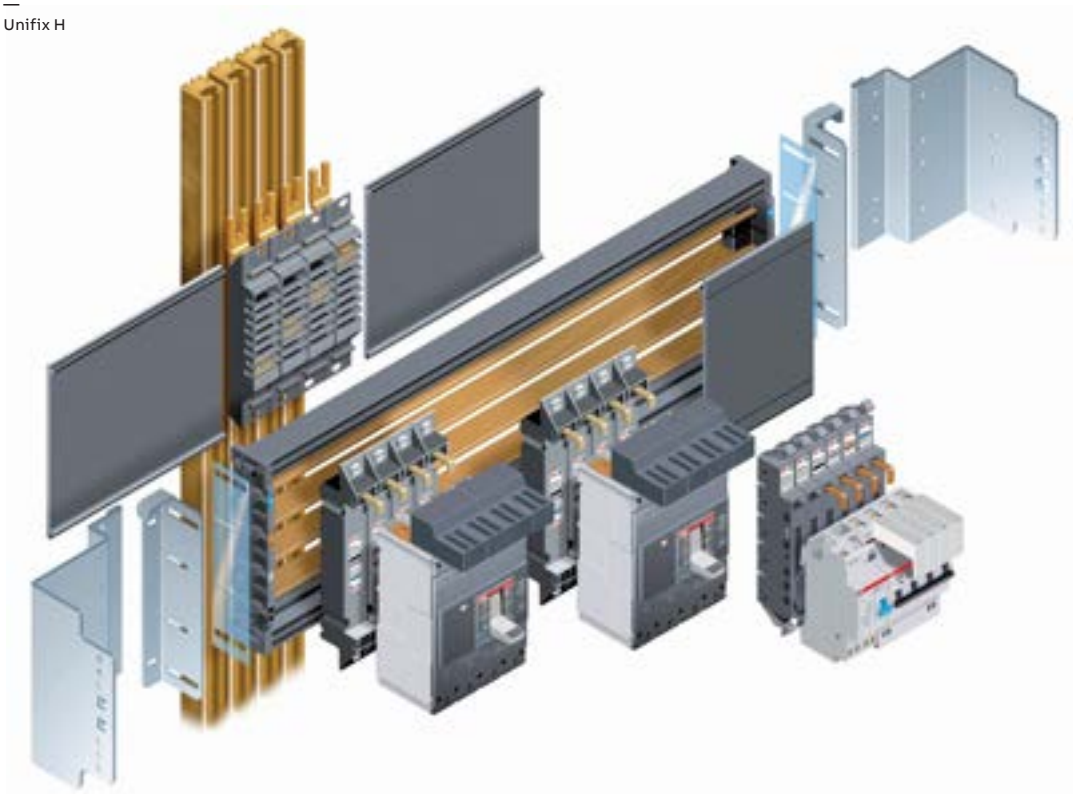

—
Unifix L

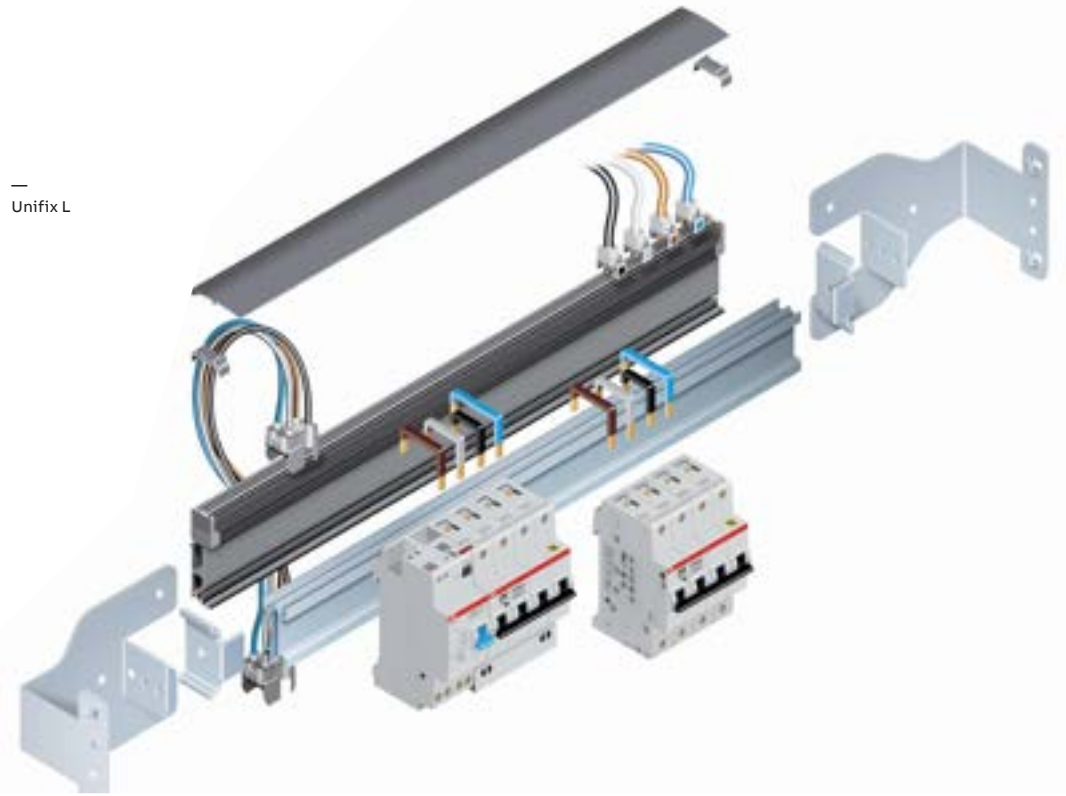

Notes

PROTECTION AND SAFETY

Electrical installation solutions for buildings
Protection and safety

Index

OVR surge protective devices selection guide

Type T1-T2 OVR pluggable

Single pole	12
TNC 230 and 400 V networks	18
TNS/TT 230 1Ph+N and 3Ph+N networks	20
TNS/TT 400 V 1Ph+N and 3Ph+N networks	24

Type 2 OVR pluggable

QuickSafe® Single pole 230 V networks	28
QuickSafe® Single pole 400 V networks	32
QuickSafe® TNC 230 V networks	36
QuickSafe® TNC 400 V networks	38
QuickSafe® TNS 230 V networks	40
QuickSafe® TNS 400 V networks	42
QuickSafe® TNS/TT 230 and 400 V 1Ph+N networks	44
QuickSafe® TNS/TT 230 and 400 V 3Ph+N networks	46

Type T2-T3 OVR Pluggable

QuickSafe® Single pole 230 and 440 V networks	50
QuickSafe® TNC 230 V 3Ph +N networks	52
QuickSafe® TNS/TT 230 V 1Ph +N networks	54
QuickSafe® TT 230 QuickSafe® and 400 V 3Ph +N networks	56
TT - 230 V and 400 V 3Ph +N networks	57

OVR PV

SPDs for photovoltaic networks	58

Digital SPDs eOVR	60
eOVR T1-T2	68
eOVR T2	72
eOVR T2-T3	76

Accessories for OVR	80

OVR UL Version

OVR Type 2 Single pole	84
OVR Type 2 Single phase networks	85
OVR Type 2 Delta networks	90
OVR Type 2 Split phase networks	92
OVR Type 2 Grounded Wye networks	93
OVRHTP (60 to 200 kA)	100
OVRHTP (240 to 400 kA)	102
OVRHT3D	104
OVRHMSU Series-Connected Suppression Filter System	106
OVRHTP series Dimensions	108
OVR T2 Power frequency overvoltage protection POP	111

Legacy GE

TPME series SPD	111
TPHE series SPD	114
TLE series	115
TME series SPD	115
TME series SPD	116
TPME series integrated SPD (A Series)	117
TPME series integrated SPD	118
TPHE series integrated SPD	119
TPME series integrated SPD	120
TPHE series integrated SPD	121
9” box extension SPD	122
24” box extension SPD	123
Legacy GE product Dimensions	126

OVR data and telecom

OVR SL Series	134
OVR SL X Series	136
OVR D Series	138
OVR E Series	140
OVR H Series	142
OVR SL 3-Wire Series	144
OVR SL LED 4-20 mA Series	146
OVR Q Series	148
OVR RTD, RTDQ & SL RTD Series	150
OVR KT & KE Series	152
OVR TN/RJ11 & ISDN/RJ45 Series	154
OVR TN, TNQ & SL TN Series	156
OVR Cat-5 & Cat-6 Series	158
OVR RS485, RS485Q & SL RS485 Series	160
OVR RF Series	162
OVR CCTV Series	164
OVR 240-16A	166
OVR TV Series	170
Protector accessories	170

Fuse Protection Devices

E 90 fuse switch disconnectors	176
E 90h fuseholders	178
E 90 PV fuse disconnectors	180
E 90 PV 1500 fuse holder	181
E 90 50/125 fuse disconnectors	182
E 90 CC fuseholders	184
E 90 J fuse fuseholders	185
Cylindrical fuses E 9F	186
ILTS-E D0 Fuse-switch-disconnectors	195
ISS D0 Fuse carriers	196
Busbars and accessories for ILTS-E and ISS	197

Other Protection Devices

Electronic Protection Devices for use behind 24 V DC Switch Mode Power Supplies	200
SQZ3 phase and sequence relay	206
E 236 undervoltage monitoring relays	207
ISL industrial insulation monitoring devices	210

H+ Line

H+Line products	213
ISOLTESTER-DIG insulation monitoring devices	216
SELVTESTER insulation monitoring devices for insulated networks at 24 V AC/DC	218
QSD remote signalling panel	219
TI switchboards and devices for medical locations	220

OVR T1-T2, T2 and T2-T3 ranges. The details make the difference

A complete range for your surge protection

Pluggable cartridge for easy replacement during maintenance operations.

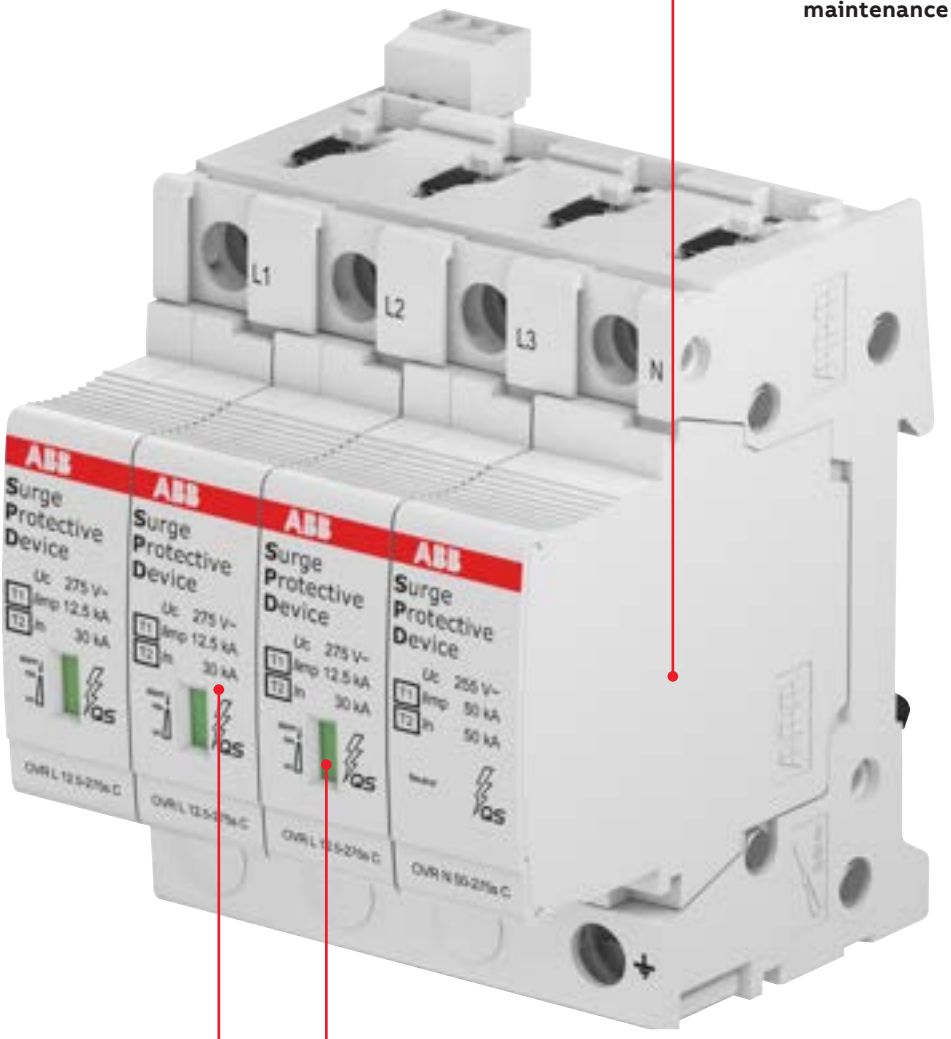

Clear information on the front of the product indicating the technical characteristics of the OVR.

Safety Reserve system with two varistors per line to extend protection lifetime.

OVR T1-T2 12.5, T2 and T2-T3 ranges are using same terminal as Pro M compact devices to guarantee a complete coordination and time saving in wiring operation.

The pluggable feature of ABB **OVR T1-T2, T2 and T2-T3** surge protective devices (SPDs) facilitates maintenance. Should one or more worn cartridges need to be replaced, the wires do not have to be removed.

The end-of-life indicator of the SPD signals the status of the device. A mechanical indicator turns from green to red when the SPD reaches the end of its life, when the end-of-life indicator is fitted.

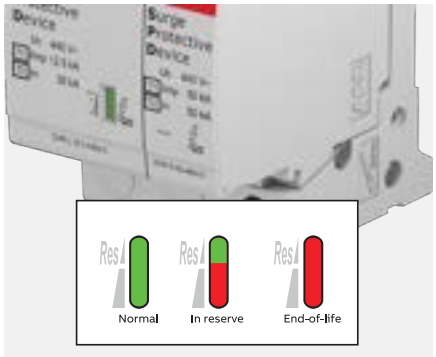

A safety reserve system for an extended protection. T1-T2s and T2s. These Surge Protective Devices are equipped with two varistors per pole. If one varistor is damaged, the SPD gives advanced warning that it is approaching the end of its life while the other varistor continues to protect the equipment, allowing to perform Preventive Maintenance.

QuickSafe MOV technology, brings seft-protected feature (no back-up needed) up to 125A for OVR T2 and OVR T2-T3, and 160A for OVR T1-T2 12.5 and T2s.

Protection and safety

OVR surge protective devices selection guide

Detailed product description

Type of building to be protected

Industrial areas, offices, public, big residential buildings

Main Distribution Board T1 (+T2)	Type code	Order code
TN-S and TT systems with 230/400 V		
	OVR T1-T2 3N 25-255 P QS	2CTB825101R1600
	OVR T1-T2 3N 25-255 P TS QS	2CTB825101R0700
TN-C systems with 230/400 V		
	OVR T1-T2 3L 25-255 P QS	2CTB825101R1300
	OVR T1-T2 3L 25-255 P TS QS	2CTB825101R0600

- Optional Auxiliary contact (TS)

Residential building with lightning rod, overhead power line or antenna

TN and TT systems with 230/400 V		
	OVR T1-T2 3N 12.5-275s P QS	2CTB825101R1300
	OVR T1-T2 3N 12.5-275s P TS QS	2CTB825101R0600

- Extended protection with additional varistor
- Optional Auxiliary contact (TS)

Residential building without lightning rod, overhead power lines or antenna

TN and TT systems with 230/400 V		
	OVR T2 3N 40-275 P QS	2CTB803973R1100
	OVR T2 3N 40-275 P TS QS	2CTB803973R0500

- Optional Auxiliary contact (TS)

Protection for photovoltaic (PV) installations

DC voltage Direct current (DC)	Type code	Order code
600 V		
	OVR PV T2 40-600 P QS	2CTB804153R2800
	OVR PV T2 40-600 P TS QS	2CTB804153R2900
1100 V		
	OVR PV T2 40-1000 P QS	2CTB804153R2400
	OVR PV T2 40-1000 P TS QS	2CTB804153R2500
	OVR PV T1-T2 5-1000 P QS	2CTB812050R1000
	OVR PV T1-T2 5-1000 P TS QS	2CTB812051R1000
	OVR PV T1-T2 12.5-1000 P QS	2CTB812120R1000
	OVR PV T1-T2 12.5-1000 P TS QS	2CTB812121R1000
1500 V		
	OVR PV T2 40-1500 P QS	2CTB804153R2600
	OVR PV T2 40-1500 P TS QS	2CTB804153R2700
	OVR PV T1-T2 5-15000 P QS	2CTB812050R1500
	OVR PV T1-T2 5-1500 P TS QS	2CTB812051R1500
	OVR PV T1-T2 10-1500 P QS	2CTB812100R1500
	OVR PV T1-T2 10-1500 P TS QS	2CTB812100R1500

- Optional Auxiliary contact (TS)

Back-up protection MCB/Fuse

Sub distribution board	Type code	Order code
Distance to sub distribution > 10 meters		
	OVR T2 3N 40-275 P QS	2CTB803973R1100
	OVR T2 3N 40-275 P TS QS	2CTB803973R0500
Distance to sub distribution > 10 meters		
	OVR T2 3L 40-275 P QS	2CTB803873R2400
	OVR T2 3L 40-275 P TS QS	2CTB803873R2500
- Optional Auxiliary contact (TS)		
Distance to sub distribution board and loads > 10 meters		
	OVR T2-T3 3N 20-275 P QS QS	2CTB803973R1200
	OVR T2-T3 3N 20-275 P TS QS	2CTB803973R1600
- Optional Auxiliary contact (TS)		
Distance between sub distribution board and loads < 10 meters		
Not need for extra protection		

Alternating current (AC)

	Type code	Order code
3 Phases		
	OVR T2 3N 40-275 P QS	2CTB803973R1100
	OVR T2 3N 40-275 P TS QS	2CTB803973R0500
1 Phase		
	OVR T2 1N 40-275 P QS	2CTB803972R1100
	OVR T2 1N 40-275 P TS QS	2CTB803972R0500
- Optional Auxiliary contact (TS)		

Protection and safety

OVR surge protective devices selection tables

Protected lines	Impulse current	Max. discharge current	Nominal current	Follow current interrupting rating	Voltage protection level	Nominal voltage	Max. cont. operating voltage	Order details	
	Iimp 10/350	Imax 8/20	In	Ifi	Up	Un	Uc		
	kA	kA	kA	kA	kV	V	V	Type code	Order code
Type T1-T2 OVR pluggable									
Uc 255 V									
1	25	60 (*)	25	50	1.5	230	264	OVR T1-T2 1L 25-255 P	2CTB813250R2300
1	25	60 (*)	25	50	1.5	230	264	OVR T1-T2 1L 25-255 P TS	2CTB813251R2300
1+1	25	60 (*)	25	50/0,1	1.5	230	255	OVR T1-T2 1N 50-255 P TS	2CTB812511R2300
3	25	60 (*)	25	50	1.5	230/400	264	OVR T1-T2 3L 75-255 P TS	2CTB812751R2300
4	25	60 (*)	25	50	1.5	230/400	264	OVR T1-T2 4L 100-255 P TS	2CTB812101R2300
3+1	25	60 (*)	25	50/0,1	1.5	230/400	255	OVR T1-T2 3N 100-255 P TS	2CTB812111R2300
Uc 275 V									
1	12.5	80	20	-	1.4	230	275	OVR T1-T2 12.5-275s P TS QS	2CTB815710R0000
1+1	12.5	80	20	-	1.4	230	275	OVR T1-T2 1N 12.5-275s P TS QS	2CTB815710R0100
3	12.5	80	20	-	1.4	230/400	275	OVR T1-T2 3L 12.5-275s P TS QS	2CTB815710R0600
3+1	12.5	80	20	-	1.4	230/400	275	OVR T1-T2 3N 12.5-275s P TS QS	2CTB815710R0700
4	12.5	80	20	-	1.4	230/400	275	OVR T1-T2 4L 12.5-275s P TS QS	2CTB815710R1100
1	12.5	80	20	-	1.4	230	275	OVR T1-T2 12.5-275s P QS	2CTB815710R1200
1+1	12.5	80	20	-	1.4	230	275	OVR T1-T2 1N 12.5-275s P QS	2CTB815710R1300
3	12.5	80	20	-	1.4	230/400	275	OVR T1-T2 3L 12.5-275s P QS	2CTB815710R1800
3+1	12.5	80	20	-	1.4	230/400	275	OVR T1-T2 3N 12.5-275s P QS	2CTB815710R1900
4	12.5	80	20	-	1.4	230/400	275	OVR T1-T2 4L 12.5-275s P QS	2CTB815710R2300
Uc 440 V									
1	25	-	40	-	2.2	400	440	OVR T1-T2 25-440s P QS	2TAM211000R4810
1	25	-	40	-	2.2	400	440	OVR T1-T2 25-440s P TS QS	2TAM211000R4811
3	25	-	40	-	2.2	400/690	440	OVR T1-T2 3L 25-440s P QS	2TAM213000R4810
3+1	25	-	40	-	2.2	400/690	440	OVR T1-T2 3N 25-440s P QS	2TAM214100R4810
3	25	-	40	-	2.2	400/690	440	OVR T1-T2 3L 25-440s P TS QS	2TAM213000R4811
3+1	25	-	40	-	2.2	400/690	440	OVR T1-T2 3N 25-440s P QS TS	2TAM214100R4811
1	12.5	80	20	-	1.9	400	440	OVR T1-T2 12.5-440s P TS QS	2CTB815710R2900
1+1	12.5	80	20	-	1.9	400	440	OVR T1-T2 1N 12.5-440s P TS QS	2CTB815710R3000
3	12.5	80	20	-	1.9	400/690	440	OVR T1-T2 3L 12.5-440s P TS QS	2CTB815710R3500
3+1	12.5	80	20	-	1.9	400/690	440	OVR T1-T2 3N 12.5-440s P TS QS	2CTB815710R3600
4	12.5	80	20	-	1.9	400/690	440	OVR T1-T2 4L 12.5-440s P TS QS	2CTB815710R4000
1	12.5	80	20	-	1.9	400	440	OVR T1-T2 12.5-440s P QS	2CTB815710R4100
1+1	12.5	80	20	-	1.9	400	440	OVR T1-T2 1N 12.5-440s P QS	2CTB815710R4200
3	12.5	80	20	-	1.9	400/690	440	OVR T1-T2 3L 12.5-440s P QS	2CTB815710R4700
3+1	12.5	80	20	-	1.9	400/690	440	OVR T1-T2 3N 12.5-440s P QS	2CTB815710R4800
4	12.5	80	20	-	1.9	400/690	440	OVR T1-T2 4L 12.5-440s P QS	2CTB815710R5200
Neutral									
1	100	100	40	-	1.9	400	440	OVR T1-T2 N 100-440s P QS	2TAM210100R7300
1	100	60 (*)	100	0.1	1.5	230	255	OVR T1-T2 N 100-255 P	2CTB813010R2300
1	100	60 (*)	100	0.1	1.5	230	255	OVR T1-T2 N 100-255 P TS	2CTB813011R2300
1	50	100	50	0.1	1.4	230	275	OVR T1-T2 N 50-275s P QS	2CTB815710R5300
1	50	100	50	0.1	1.9	400	440	OVR T1-T2 N 50-440s P QS	2CTB815710R5300
Cartridges									
1	25	60 (*)	40	-	2.2	400	440	OVR T1-T2 25-440s C QS	2TAM210200R4810
1	100	100	40	-	1.9	400	440	OVR T1-T2 N 100-440s C QS	2TAM210300R7300
1	25	60 (*)	25	50	1.5	230	264	OVR T1-T2 1L 25-255 C	2CTB813252R2300
1	50	60 (*)	50	0.1	1.5	230	255	OVR T1-T2 N 50-255 C	2CTB812522R2300
1	100	60 (*)	100	0.1	1.5	230	255	OVR T1-T2 N 100-255 TT C	2CTB812022R2300
1	100	60 (*)	100	0.1	1.5	230	255	OVR T1-T2 N 100-255 C	2CTB813012R2300
1	12.5	80	20	-	1.4	230	275	OVR T1-T2 12.5-275s C QS	2CTB815710R2600
1	12.5	80	20	-	1.9	400	440	OVR T1-T2 12.5-440s C QS	2CTB815710R5500
1	50	100	50	-	1.4	230	275	OVR T1-T2 N 50-275s C QS	2CTB815710R2700
1	50	100	50	-	1.9	400	440	OVR T1-T2 N 50-440s C QS	2CTB815710R5600
Type 2 OVR non-pluggable									
Uc 275 V									
1	-	20	5	-	1.0	230	275	OVR T2 20-275	2CTB804200R0100
1	-	40	20	-	1.4	230	275	OVR T2 40-275	2CTB804201R0100
1	-	20	5	-	1.0	230	275	OVR T2 20-275 (x20)	2CTB804200R1100
1	-	40	20	-	1.4	230	275	OVR T2 40-275 (x20)	2CTB804201R1100

(*) Ipeak, extended feature similar to Imax

Protection and safety

OVR surge protective devices selection tables

Protected lines	Impulse current	Max. discharge current	Nominal current	Follow current interrupting rating	Voltage protection level	Nominal voltage	Max. cont. operating voltage	Order details	
	Iimp 10/350	Imax 8/20	In	Ifi	Up	Un	Uc		
	kA	kA	kA	kA	kV	V	V	Type code	Order code
Type 2 OVR pluggable									
Uc 275 V									
1	2	40	20	-	1.25	230	275	OVR T2 40-275 P TS QS	2CTB803871R1700
1+1	2	40	20	-	1.25	230	275	OVR T2 1N 40-275 P TS QS	2CTB803972R0500
3	2	40	20	-	1.25	230/400	275	OVR T2 3L 40-275 P TS QS	2CTB803873R2500
4	2	40	20	-	1.25	230/400	275	OVR T2 4L 40-275 P TS QS	2CTB803873R5200
1	2	40	20	-	1.25	230	275	OVR T2 40-275 P QS	2CTB803871R2300
1+1	2	40	20	-	1.25	230	275	OVR T2 1N 40-275 P QS	2CTB803972R1100
3	2	40	20	-	1.25	230/400	275	OVR T2 3L 40-275 P QS	2CTB803873R2400
4	2	40	20	-	1.25	230/400	275	OVR T2 4L 40-275 P QS	2CTB803873R5600
1	2	40	20	-	1.4	230	275	OVR T2 40-275s P TS QS	2CTB815704R0000
1+1	2	40	20	-	1.4	230	275	OVR T2 1N 40-275s P TS QS	2CTB815704R0200
3	2	40	20	-	1.4	230/400	275	OVR T2 3L 40-275s P TS QS	2CTB815704R0600
4	2	40	20	-	1.4	230/400	275	OVR T2 4L 40-275s P TS QS	2CTB815704R1100
1	2	40	20	-	1.4	230	275	OVR T2 40-275s P QS	2CTB815704R1200
1+1	2	40	20	-	1.4	230	275	OVR T2 1N 40-275s P QS	2CTB815704R1400
3	2	40	20	-	1.4	230/400	275	OVR T2 3L 40-275s P QS	2CTB815704R1800
4	2	40	20	-	1.4	230/400	275	OVR T2 4L 40-275s P QS	2CTB815704R2300
1	6.25	80	20	-	1.4	230	275	OVR T2 80-275s P TS QS	2CTB815708R0000
1+1	6.25	80	20	-	1.4	230	275	OVR T2 1N 80-275s P TS QS	2CTB815708R0200
3	6.25	80	20	-	1.4	230/400	275	OVR T2 3L 80-275s P TS QS	2CTB815708R0600
4	6.25	80	20	-	1.4	230/400	275	OVR T2 4L 80-275s P TS QS	2CTB815708R1100
1	6.25	80	20	-	1.4	230	275	OVR T2 80-275s P QS	2CTB815708R1200
1+1	6.25	80	20	-	1.4	230	275	OVR T2 1N 80-275s P QS	2CTB815708R1400
3	6.25	80	20	-	1.4	230/400	275	OVR T2 3L 80-275s P QS	2CTB815708R1800
4	6.25	80	20	-	1.4	230/400	275	OVR T2 4L 80-275s P QS	2CTB815708R2300

(*) Ipeak, extended feature similar to Imax

Protection and safety

OVR surge protective devices selection tables

Protected lines	Impulse current	Max. discharge current	Nominal current	Follow current interrupting rating	Voltage protection level	Nominal voltage	Max. cont. operating voltage	Order details	
	Iimp 10/350	Imax 8/20	In	Ifi	Up	Un	Uc		
	kA	kA	kA	kA	kV	V	V	Type code	Order code
Neutral									
1	2	80	30	0.1	1.4	230	275	OVR T2-T3 N 80-275 P QS	2CTB803973R1900
1	6.25	80	30	0.1	1.4	230	275	OVR T2 N 80-275s P QS	2CTB815708R2500
Cartridges									
1	2	80	30	-	1.4	230	275	OVR T2-T3 N 80-275 C QS	2CTB803876R0000
1	2	40	20	-	1.25	230	275	OVR T2 40-275 C QS	2CTB803876R1000
1	6.25	40	20	-	1.4	230	275	OVR T2 40-275s C QS	2CTB815704R2600
1	6.25	80	20	-	1.4	230	275	OVR T2 80-275s C QS	2CTB815708R2600
1	6.25	80	30	-	1.4	230	275	OVR T2 N 80-275s C QS	2CTB815708R2800
Uc 350V									
1	2	40	20	-	1.5	230	350	OVR T2 40-350 P QS	2CTB803881R2300
1	2	40	20	-	1.5	230	350	OVR T2 40-350 P TS QS	2CTB803881R1700
1+1	2	40	20	-	1.7	230	350	OVR T2 1N 40-350 P QS	2CTB803982R1100
1+1	2	40	20	-	1.7	230	350	OVR T2 1N 40-350 P TS QS	2CTB803982R0500
3	2	40	20	-	1.5	230/400	350	OVR T2 3L 40-350 P QS	2CTB803883R2400
3	2	40	20	-	1.5	230/400	350	OVR T2 3L 40-350 P TS QS	2CTB803883R2500
3+1	2	40	20	-	1.7	230/400	350	OVR T2 3N 40-350 P QS	2CTB803983R1100
3+1	2	40	20	-	1.7	230/400	350	OVR T2 3N 40-350 P TS QS	2CTB803983R0500
Neutral									
1	2	80	30	0.1	1.4	230	350	OVR T2 N 80-350 P QS	2CTB803983R1900
Cartridges									
1	2	80	30	-	1.4	230	350	OVR T2 N 80-350 C QS	2CTB803886R0000
1	2	40	20	-	1.5	230	350	OVR T2 40-350 C QS	2CTB803886R1000
Uc 440V									
1	2	40	20	-	1.8	400	440	OVR T2 40-440 P QS	2CTB803871R1200
1	2	40	20	-	1.8	400	440	OVR T2 40-440 P TS QS	2CTB803871R0500
3	2	40	20	-	1.8	400/690	440	OVR T2 3L 40-440 P TS QS	2CTB803873R2700
4	2	40	20	-	1.8	400/690	440	OVR T2 4L 40-440 P QS	2CTB803873R5100
4	2	40	20	-	1.8	400/690	440	OVR T2 4L 40-440 P TS QS	2CTB803873R5300
3+1	2	40	20	-	2.1	400/690	440	OVR T2 3N 40-440 P QS	2CTB803973R1400
3+1	2	40	20	-	2.1	400/690	440	OVR T2 3N 40-440 P TS QS	2CTB803973R1500
3	2	40	20	-	1.8	400/690	440	OVR T2 3L 40-440 P QS	2CTB803873R2800
1	2	40	20	-	1.8	400	440	OVR T2 40-440s P TS QS	2CTB815704R2900
3+1	2	40	20	-	1.8	400/690	440	OVR T2 3N 40-440s P TS QS	2CTB815704R3700
1	2	40	20	-	1.8	400	440	OVR T2 40-440s P QS	2CTB815704R4100
1	6.25	80	20	-	1.8	400	440	OVR T2 80-440s P TS QS	2CTB815708R2900
3	6.25	80	20	-	1.8	400/690	440	OVR T2 3L 80-440s P TS QS	2CTB815708R3500
3+1	6.25	80	20	-	1.8	400/690	440	OVR T2 3N 80-440s P TS QS	2CTB815708R3700
4	6.25	80	20	-	1.8	400/690	440	OVR T2 4L 80-440s P TS QS	2CTB815708R4000
1	6.25	80	20	-	1.8	400	440	OVR T2 80-440s P QS	2CTB815708R4100
3	6.25	80	20	-	1.8	400/690	440	OVR T2 3L 80-440s P QS	2CTB815708R4700
3+1	6.25	80	20	-	1.8	400/690	440	OVR T2 3N 80-440s P QS	2CTB815708R4900
4	6.25	80	20	-	1.8	400/690	440	OVR T2 4L 80-440s P QS	2CTB815708R5200
1+1	2	40	20	-	1.9	400	440	OVR T2 1N 40-440 P TS QS	2CTB803972R1400

Protection and safety

OVR surge protective devices selection tables

Protected lines	Impulse current	Max. discharge current	Nominal current	Follow current interrupting rating	Voltage protection level	Nominal voltage	Max. cont. operating voltage	Order details	
	Iimp 10/350	Imax 8/20	In	Ifi	Up	Un	Uc		
	kA	kA	kA	kA	kV	V	V	Type code	Order code
Neutral									
1	6.25	80	30	0.1	2	400	440	OVR T2 N 80-440s P QS	2CTB815708R5400
1	2	80	30	0.1	1.4	400	440	OVR T2-T3 N 80-440 P QS	2CTB803973R2000
Cartridges									
1	2	80	20	-	1.8	400	440	OVR T2 40-440 C QS	2CTB803876R0400
1	2	40	20	-	1.8	400	440	OVR T2-T3 40-440s C QS	2CTB815704R5500
1	6.25	80	20	-	1.8	400	440	OVR T2 80-440s C QS	2CTB815708R5500
1	6.25	80	30	-	1.4	400	440	OVR T2-T3 N 80-440 C QS	2CTB803886R0100
1	6.25	80	30	-	2	400	440	OVR T2 N 80-440s C QS	2CTB815708R5700
Type T2-T3 OVR Pluggable									
Uc 275V									
1	2	20	5	-	0.9	230	275	OVR T2-T3 20-275 P QS	2CTB803871R2400
1	2	20	5	-	0.9	230	275	OVR T2-T3 20-275 P TS QS	2CTB803871R2500
1+1	2	20	5	-	1.4	230	275	OVR T2-T3 1N 20-275 P QS	2CTB803972R1200
1+1	2	20	5	-	1.4	230	275	OVR T2-T3 1N 20-275 P TS QS	2CTB803972R1300
3	2	20	5	-	0.85	230/400	275	OVR T2-T3 3L 20-275 P QS	2CTB803873R3400
3	2	20	5	-	0.85	230/400	275	OVR T2-T3 3L 20-275 P TS QS	2CTB803873R3500
3+1	2	20	5	-	1.4	230/400	275	OVR T2-T3 3N 20-275 P QS	2CTB803973R1200
3+1	2	20	5	-	1.4	230/400	275	OVR T2-T3 3N 20-275 P TS QS	2CTB803973R1600
Neutral									
1	2	80	30	0.1	1.4	230	275	OVR T2-T3 N 80-275 P QS	2CTB803973R1900
Cartridges									
1	2	20	5	-	1.4	230	275	OVR T2 20-275 C QS	2CTB803876R1200
1	2	80	30	-	1.4	230	275	OVR T2-T3 N 80-275 C QS	2CTB803876R0000
Uc 440V									
1	2	20	5	-	1.4	400	440	OVR T2-T3 20-440 P QS	2CTB803871R1100
1	2	20	5	-	1.4	400	440	OVR T2-T3 20-440 P TS QS	2CTB803871R1300
3+1	2	20	5	-	1.4	400/690	440	OVR T2-T3 3N 20-440 P QS	2CTB803973R1300
Neutral									
1		80	30	0.1	1.4	400	440	OVR T2-T3 N 80-440 P QS	2CTB803973R2000
Cartridges									
1	2	80	5	0.1	1.4	400	440	OVR T2 20-440 C QS	2CTB803876R0600
1	2	80	30	0.1	1.4	400	440	OVR T2-T3 N 80-440 C QS	2CTB803886R0100

Protection and safety

OVR surge protective devices selection tables

Protected lines	Total Discharge Current	Impulse current	Max. discharge current	Nominal current	Short-circuit current rating	Voltage protection level	Nominal voltage	Max. cont. operating voltage	Order details	
	Itotal 10/350	Iimp 10/350	Imax 8/20	In	Iscpv	Up	Un	Uc		
	kA	kA	kA	kA	A	kV	V	V	Type code	Order code
Type T1-T2 OVR pluggable PV application										
Uc 1100 V DC										
1+1 DC	5	5	40	20	11.000	3.8	1000	1100	OVR PV T1-T2 5-1000 P QS	2CTB812050R1000
1+1 DC	5	5	40	20	11.000	3.8	1000	1100	OVR PV T1-T2 5-1000 P TS QS	2CTB812051R1000
1+1 DC	6,25	12.5	40	20	11.000	3.8	1000	1100	OVR PV T1-T2 12.5-1000 P QS	2CTB812120R1000
1+1 DC	6,25	12.5	40	20	11.000	3.8	1000	1100	OVR PV T1-T2 12.5-1000 P TS QS	2CTB812121R1000
Cartridges										
1+1 DC	5	5	40	20	11.000	-	1000	1100	OVR PV T1-T2 5-1000 C QS	2CTB812052R1000
1+1 DC	6,25	6,25	40	20	11.000	-	1000	1100	OVR PV T1-T2 12.5-1000 C QS	2CTB812122R1000
1+1 DC	6,25	6,25	40	20	11.000	-	1000	1100	OVR PV T1-T2 12.5-1000 M C QS	2CTB812122R1001
Uc 1500 V DC										
1+1 DC	5	5	30	20	11.000	5	1500	1500	OVR PV T1-T2 5-1500 P QS	2CTB812050R1500
1+1 DC	5	5	30	20	11.000	5	1500	1500	OVR PV T1-T2 5-1500 P TS QS	2CTB812051R1500
1+1 DC	5	10	30	20	11.000	5	1500	1500	OVR PV T1-T2 10-1500 P QS	2CTB812100R1500
1+1 DC	5	10	30	20	11.000	5	1500	1500	OVR PV T1-T2 10-1500 P TS QS	2CTB812101R1500
Cartridges										
1+1 DC	5	5	30	20	11.000	-	1500	1500	OVR PV T1-T2 5-1500 C QS	2CTB812052R1500
1+1 DC	5	5	30	20	11.000	-	1500	1500	OVR PV T1-T2 10-1500 C QS	2CTB812102R1500
1+1 DC	5	5	30	20	11.000	-	1500	1500	OVR PV T1-T2 10-1500 M C QS	2CTB812102R1501

OVR PV T1-T2 12.5-1000 M QS

Protection and safety

OVR surge protective devices selection tables

Protected lines	Impulse current	Max. discharge current	Nominal current	Short-circuit current rating	Voltage protec-tion level	Nominal voltage	Max. cont. operating voltage	Order details	
	Iimp 10/350	Imax 8/20	In	Iscpv	Up	Un	Uc		
	kA	kA	kA	A	kV	V	V	Type code	Order code
Type 2 OVR pluggable PV applications									
Uc 1000 V DC									
1+1 DC	-	40	20	10.000	4	1000	1000	OVR PV T2 40-1000 P	2CTB802400R1000
1+1 DC	-	40	20	10.000	4	1000	1000	OVR PV T2 40-1000 P TS	2CTB802401R1000
1+1 DC	-	40	20	10.000	4	1000	1000	OVR PV T2 40-1000 P BULK (x20)	2CTB802400Z1000
1+1 DC	-	40	20	10.000	4	1000	1000	OVR PV T2 40-1000 P TS BULK (x20)	2CTB802401Z1000
Cartridges									
1+1 DC	-	40	20	10.000	-	1000	1000	OVR PV T2 40-1000 C	2CTB802402R1000
Uc 1500 V DC									
1+1 DC	-	40	15	10.000	5	1500	1500	OVR PV T2 40-1500 P	2CTB802400R1500
1+1 DC	-	40	10	10.000	5	1500	1500	OVR PV T2 40-1500 P TS	2CTB802401R1500
1+1 DC	-	40	15	10.000	5	1500	1500	OVR PV T2 40-1500 P BULK (x20)	2CTB802400Z1500
1+1 DC	-	40	10	10.000	5	1500	1500	OVR PV T2 40-1500 P TS BULK (x20)	2CTB802401Z1500
Cartridges									
1+1 DC	2	40	10	10.000	-	1500	1500	OVR PV T2 40-1500 C	2CTB802402R1500

OVR PV T2 40-1000 P TS

Protection and safety

OVR Type 1+2 surge protective devices. Single pole

OVR T1-T2 1L 25-255 P TS

Technical features

Types			**OVR T1-T2 1L 25-255 P**
with auxiliary contact (TS)			**OVR T1-T2 1L 25-255 P TS**
Technology			Spark Gap
Electrical features			
Standard			IEC 61643-11 / EN 61643-11 UL 1449. 5th Edition
Type/test class			T1-T2 / I - II
Protected lines			1
System network			TNC - TNS - TT
Type of current			AC 47-63 Hz
Voltage regulation of the system network			± 10 %
Nominal system voltage Un		[V]	230
Max. cont. operating voltage Uc		[V]	264
Maximum impulse current Iimp (10/350)		[kA]	25
Nominal discharge current In 8/20)		[kA]	25
Maximum discharge current Imax (8/20), Ipeak (8/20)*		[kA]	60 (*)
Follow current interrupting rating Ifi		[kA]	50
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	1.5 / - / -
Voltage protection level Ures at 3 kA		[kV]	-
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	440 V: 120 min / -
Response time		[ns]	≤ 100
Short-circuit withstand capability Isccr		[kA]	50
Max Limitation/Extinction of mains follow currents (L-N)/(N-PE)		[kA]	100 / -
Maximum Prospective Short-Circuit current on the point of installation		[kA]	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 315
	circuit breaker (B or C curve)	[A]	-
Pluggable cartridge			Yes
Integrated thermal disconnector			Yes
State indicator			Yes
Safety reserve			No
Auxiliary contact			Yes (TS option)
Installation			
Wire range (L, N, PE)	solid wire (single wiring / V wiring)	[mm²]	10…35 / 10…25
	stranded wire (single wiring / V wiring)	[mm²]	10…50 / 10…35
Stripping length (L, N, PE)		[mm]	16.5
Tightening torque (L, N, PE)		[Nm]	7
Auxiliary contact (TS)			
Contacts information			1 NO - 1 NC
Min. load			5V DC - 10 mA
Max. load			250 V AC - 0,5A
Connection cross-section		[mm²]	0.5 ...1.5
Miscellanous characteristics			
Stocking and operating temperature		[°C]	[parallel] / [series] -40 to +80 / -40 to 60
Maximal Altitude		[m]	2000
Degree of protection			IP20 - Indoor
Fire resistance according to UL 94			V0
Dimensions			
height x width x depth		[mm]	90 x 36 x 73
		[inches]	3.51 x 1.40 x 2.85
Dimensions with auxilary contact (TS)			
height x width x depth		[mm]	99 x 36 x 73
		[inches]	3.86 x 1.40 x 2.85
Replacement Cartridges			
Phase Product ID			OVR T1-T2 1L 25-255 C 2CTB813252R2300
Neutral Product ID			-

(*) Ipeak, extended feature similar to Imax

Protection and safety

OVR Type 1+2 surge protective devices. Single pole

OVR T1-T2 12.5-275s P QS **OVR T1-T2 12.5-275s P TS QS**	**OVR T1-T2 12.5-440s P QS** **OVR T1-T2 12.5-440s P TS QS**	**OVR T1-T2 25-440s P QS** **OVR T1-T2 25-440s P TS QS**
Varistor	Varistor	Varistor
IEC 61643-11 / EN 61643-11: 2012 / A11: 2018	IEC 61643-11 / EN 61643-11: 2012 / A11: 2018	IEC 61643-11/EN 61643-11:2012/A11:2018
T1-T2 / I - II	T1-T2 / I - II	T1-T2/I - II
1	1	1
TT (L-N) - TNS - TNC	TT (L-N) - TNS - TNC	TNC - TNS - TT
AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
± 20%	± 10%	± 20 %
230	400	400
275	440	440
12.5	12.5	25
20	20	40
80	80	-
-	-	-
1.4 / - / -	1.9 / - / -	2.2 / - / -
0.5	0.5	-
337 /	581 /	581 / -
< 25	< 25	< 25
100	100	100
-	-	
100	100	
≤ 160	≤ 160	≤ 315
≤ 125	≤ 125	-
Yes	Yes	Yes
Yes	Yes	Yes
Yes	Yes	Yes
Yes	Yes	Yes
Yes (TS option)	Yes (TS option)	Yes (TS option)
2.5 ... 35 / -	2.5 ... 35 / -	2.5 - 50
2.5 ... 25 / -	2.5 ... 25 / -	2.5 - 35
12.5	12.5	15
2.8	2.8	2.5
1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC
12 V DC - 10 mA	12 V DC - 10 mA	5V DC - 10 mA
250 V AC - 1A	250 V AC - 1A	250 V AC - 0,5A
0.5 ...1.5	0.5 ...1.5	0.5 ...1.5
-40 to +80	-40 to +80	-40 to +80
5000	5000	2000
IP 20 - Indoor	IP 20 - Indoor	IP20 - Indoor
V-0	V-0	V0
88 x 17.8 x 76.7	88 x 35.6 x 76.7	113 x 36 x 86.2
3.46 x 0.70 x 3.02	3.46 x 1.4 x 3.02	4,45 x 1,41 x 3,40
95.8 x 17.8 x 76.7	95.8 x 35.6 x 76.7	114 x 36 x 86.2
3.77 x 0.70 x 3.02	3.77 x 1.4 x 3.02	4,48 x 1,41 x 3,40
OVR T1-T2 12.5-275s C QS 2CTB815710R2600	OVR T1-T2 12.5-440s C QS 2CTB815710R5500	OVR T1-T2 25-440s C QS 2TAM210200R4810
-	-	OVR T1-T2 N 100-440s C QS 2TAM210300R7300

Protection and safety

OVR Type 1+2 surge protective devices Single pole

OVR T1-T2 N 100-255 P TS

Technical features

Types			**OVR T1-T2 N 100-255 P**
with auxiliary contact (TS)			**OVR T1-T2 N 100-255 P TS**
Technology			Spark Gap
Electrical features			
Standard			IEC 61643-11 / EN 61643-11 UL 1449. 5th Edition
Type/test class			T1-T2 / I - II
Protected lines			N
System network			TNS / TT
Type of current			AC 47-63 Hz
Voltage regulation of the system network			± 10 %
Nominal system voltage Un		[V]	230
Max. cont. operating voltage Uc		[V]	255
Maximum impulse current Iimp (10/350)		[kA]	100
Nominal discharge current In 8/20)		[kA]	100
Maximum discharge current Imax (8/20), Ipeak (8/20)*		[kA]	60 (*)
Follow current interrupting rating Ifi		[kA]	0,1
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	- / 1.5 / -
Voltage protection level Ures at 3 kA		[kV]	-
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	- / 1200
Response time		[ns]	≤100
Short-circuit withstand capability Isccr		[kA]	-
Backup protection maximum rating	fuse (gG)	[A]	-
	circuit breaker (B or C curve)	[A]	-
Pluggable cartridge			Yes
Integrated thermal disconnector			Yes
State indicator			Yes
Safety reserve			No
Auxiliary contact			Yes (TS option)
Installation			
Wire range (L, N, PE)	solid wire (single wiring / V wiring)	[mm²]	10…35 / 10…25
	stranded wire (single wiring / V wiring)	[mm²]	10…50 / 10…35
Stripping length (L, N, PE)		[mm]	16.5
Tightening torque (L, N, PE)		[Nm]	7
Auxiliary contact (TS)			
Contacts information			1 NO - 1 NC
Min. load			5V DC - 10 mA
Max. load			250 V AC - 0,5A
Connection cross-section		[mm²]	0.5 …1.5
Miscellanous characteristics			
Stocking and operating temperature		[°C]	[parallel] / [series] -40 to +80 / -40 to 60
Maximal Altitude		[m]	2000
Degree of protection			IP20 - Indoor
Fire resistance according to UL 94			V0
Dimensions			
height x width x depth		[mm]	90 x 36 x 73
		[inches]	3.51 x 1.40 x 2.85
Dimensions with auxilary contact (TS)			
height x width x depth		[mm]	99 x 36 x 73
		[inches]	3.86 x 1.40 x 2.85
Replacement Cartridges			
Phase Product ID			
Neutral Product ID			OVR T1-T2 N 100-255 C 2CTB813012R2300

(*) Ipeak, extended feature similar to Imax

Protection and safety

OVR Type 1+2 surge protective devices Single pole

OVR T1-T2 N 50-275s P QS	**OVR T1-T2 N 50-440s P QS**	**OVR T1-T2 N 100-440s P QS**
GDT	GDT	GDT
IEC 61643-11 / EN 61643-11: 2012 / A11: 2018	IEC 61643-11 / EN 61643-11: 2012 / A11: 2018	IEC 61643-11/EN 61643-11:2012/A11:2018
T1-T2 / I - II	T1-T2 / I - II	T1-T2/I - II
N	N	N
TT (N-PE) - TNS (N-PE)	TT (N-PE) - TNS (N-PE)	TNS / TT
AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
± 20%	± 10%	± 20 %
230	400	400/690
275	440	440
50	50	100
50	50	100
100	100	100
-	-	-
- / 1.4 / -	- / 1.9 / -	- / 1.9 / -
-	-	-
- / 1200	- / 1200	1640
≤10	≤10	<25
≤100	≤100	≤100
-	-	≤315
-	-	-
Yes	Yes	Yes
No	No	Yes
No	No	Yes
No	No	Yes
No	No	No
2.5 ... 50 / -	2.5 ... 50 / -	2.5 - 50 / -
2.5 ... 35 / -	2.5 ... 35 / -	2.5 - 35 / -
12.5	12.5	15
3.5	3.5	2.5
-40 to +80	-40 to +80	-40 to +80
5000	5000	2000
IP 20 - Indoor	IP 20 - Indoor	IP20 - Indoor
V0	V0	V0
88 x 17.8 x 76.7	88 x 17.8 x 76.7	113 x 36 x 86.2
3.46 x 0.7 x 3.02	3.46 x 0.7 x 3.02	4,45 x 1.41 x 3,40
OVR T1-T2 N 50-275s C QS 2CTB815710R2700	OVR T1-T2 N 50-440s C QS 2CTB815710R5600	OVR T1-T2 N 100-440s C QS 2TAM210300R7300

Protection and safety

OVR Type 1+2 surge protective devices Single pole

Type 1+2 surge protective devices are designed to discharge high current surges without any destruction of the installation. These surge protective devices are characterized by their capacity to withstand impulse current with 10/350 µs wave form which simulate natural lightning current.
Type 1+2 ABB surge protective devices have a high impulse current withstand capacity with ensuring a low protection level (Up).
Type 1+2 SPDs can be installed at the entrance in the main switch board for a global protection of the electrical installation.

Poles	Impulse current Iimp 10/350	Max. discharge current Imax 8/20, Ipeak 8/20*	Follow current interrupting rating Ifi	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kA	kV	V	V	EAN	Type code	Order code	kg
1	25	60 (*)	50	1.5	230	264	4053546053364	OVR T1-T2 1L 25-255 P	2CTB813250R2300	0.27
1	25	60 (*)	50	1.5	230	264	4053546053371	OVR T1-T2 1L 25-255 P TS	2CTB813251R2300	0.3
1	25	60 (*)	0.1	1.5	230	255	4053546053234	OVR T1-T2 N 100-255 P	2CTB813010R2300	0.3
1	25	60 (*)	0.1	1.5	230	255	4053546054736	OVR T1-T2 N 100-255 P TS	2CTB813011R2300	0.3
1	12.5	80	-	1.4	230	275	524881	OVR T1-T2 12.5-275s P TS QS	2CTB815710R0000	0.15
1	12.5	80	-	1.4	230	275	524959	OVR T1-T2 12.5-275s P QS	2CTB815710R1200	0.15
1	12.5	80	-	1.9	400	440	525055	OVR T1-T2 12.5-440s P TS QS	2CTB815710R2900	0.30
1	12.5	80	-	1.9	400	440	525123	OVR T1-T2 12.5-440s P QS	2CTB815710R4100	0.30
1	50	100	-	1.4	230	275	525024	OVR T1-T2 N 50-275s P QS	2CTB815710R2400	0.15
1	25	-	-	2.2	400	440	6941593468416	OVR T1-T2 25-440s P QS	2TAM211000R4810	0.445
1	25	-	-	2.2	400	440	6941593468423	OVR T1-T2 25-440s P TS QS	2TAM211000R4811	0.445
1	50	100	-	1.9	400	440	6941593468560	OVR T1-T2 N 50-440s P QS	2CTB815710R5300	0.320
1	100	100	-	1.9	400	440	6941593468560	OVR T1-T2 N 100-440s P QS	2TAM210100R7300	0.320

(*) Ipeak, extended feature similar to Imax

Notes

Protection and safety

OVR Type 1+2 surge protective devices TNC 230 and 400 V networks

Technical features

Types				**OVR T1-T2 3L 12.5-275s P QS**	**OVR T1-T2 3L 12.5-440s P QS**	**OVR T1-T2 3L 25-440s P QS**
with auxiliary contact (TS)			**OVR T1-T2 3L 75-255 P TS**	**OVR T1-T2 3L 12.5-275s P TS QS**	**OVR T1-T2 3L 12.5-440s P TS QS**	**OVR T1-T2 3L 25-440s P TS QS**
Technology			Spark Gap	Varistor	Varistor	Varistor
Electrical features						
Standard			IEC 61643-11/EN 61643-11 UL 1449. 5th Edition	IEC 61643-11/EN 61643-11:2012/ A11:2018	IEC 61643-11/EN 61643-11:2012/ A11:2018	IEC 61643-11/EN 61643-11:2012/ A11:2018
Type/test class			T1-T2/I - II	T1-T2/I - II	T1-T2/I - II	T1-T2/I - II
Protected lines			3	3	3	3
System network			TNC	TNC	TNC	TNC - IT (230)
Type of current			AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 10 %	± 20%	± 10%	± 20 %
Nominal system voltage Un		[V]	230/400	230/400	400/690	400/690
Max. cont. operating voltage Uc		[V]	264	275	440	440
Maximum impulse current Iimp (10/350)		[kA]	25	12.5	12.5	25
Max.Imp current Tot Iimp (10/350)		[kA]	75	37.5	37.5	75
Nominal discharge current In (8/20)		[kA]	25	20	20	40
Maximum discharge current Imax (8/20), Ipeak (8/20)*		[kA]	60 (*)	80	80	-
Follow current interrupting rating Ifi		[kA]	50	-	-	-
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	-/-/1.5	-/-/1.4	-/-/2	2.2 / - / -
Voltage protection level Ures at 3 kA		[kV]	-	0.5	0.8	-
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200 ms)		[V]	440 V: 120 min	337/–	581/–	581 / -
Response time		[ns]	≤ 100	≤ 25	≤ 25	<25
Short-circuit withstand capability Isccr		[kA]	50	100	100	100
Max Limitation/Extinction of mains follow currents (L-N)/(N-PE)		[kA]	100/-	-	-	
Maximum Prospective Short-Circuit current on the point of installation		[kA]	100	100	100	
Backup protection maximum rating	fuse (gG)	[A]	≤ 315	≤ 160	≤ 160	≤ 315
	circuit breaker (B or C)	[A]	-	≤ 125	≤ 125	-
Pluggable cartridge			Yes	Yes	Yes	Yes
Integrated thermal disconnector			Yes	Yes	Yes	Yes
State indicator			Yes	Yes	Yes	Yes
Safety reserve			No	Yes	Yes	Yes
Auxiliary contact			Yes	Yes (TS option)	Yes (TS option)	Yes
Installation						
Wire range (L, N, PE)	solid wire, single wiring	[mm²]	10...35	2.5 ... 35	2.5 ... 35	2.5 - 50
	stranded wire, single wiring	[mm²]	10...50	2.5 ... 25	2.5 ... 25	2.5 - 35
Stripping length (L, N, PE)		[mm]	15.5	12.5	12.5	15
Tightening torque (L, N, PE)		[Nm]	7	2.8	2.8	2.5
Auxiliary contact (TS)						
Contacts information			1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC
Min. load			5V DC - 10 mA	12 DC - 10 mA	12 DC - 10 mA	5V DC - 10 mA
Max. load			250 V AC - 0,5A	250 V AC - 1A	250 V AC - 1A	250 V AC - 0,5A
Connection cross-section		[mm²]	0.5 ...1.5	0.5 ...1.5	0.5 ...1.5	0.5 ...1.5
Miscellanous characteristics						
Stocking and operating temperature		[°C]	[parallel] / [series] -40 to +80 / -40 to 60	-40 to +80	-40 to +80	-40 to +80
Maximal Altitude		[m]	2000	5000	5000	2000
Degree of protection			IP20 - Indoor	IP 20 - Indoor	IP 20 - Indoor	IP20 - Indoor
Fire resistance according to UL 94			V0	V-0	V-0	V0
Dimensions						
height x width x depth		[mm]		88 x 53.4 x 76.7	88 x 106.8 x 76.7	113 x 108 x 86.2
		[inches]		3.46 x 2.1 x 3.02	3.46 x 4.2 x 3.02	4,45 x 4,23 x 3,40
Dimensions with auxilary contact (TS)						
height x width x depth		[mm]	99 x 72 x 108	95.8 x 53.4 x 76.7	95.8 x 106.8 x 76.7	114 x 108 x 86.2
		[inches]	3.86 x 2.80 x 4.25	3.77 x 2.1 x 3.02	3.77 x 4.2 x 3.02	4,48 x 4,23 x 3,40
Replacement Cartridges						
Phase Product ID			OVR T1-T2 1L 25-255 C 2CTB813252R2300	OVR T1-T2 12.5-275s C QS 2CTB815710R2600	OVR T1-T2 12.5-440s C QS 2CTB815710R5500	OVR T1-T2 25-440s C QS 2TAM210200R4810

(*) Ipeak, extended feature similar to Imax

Protection and safety

OVR Type 1+2 surge protective devices TNC networks

OVR T1-T2 3L 75-255 P TS

Type 1+2 surge protective devices are designed to discharge high current surges without any destruction of the installation. These surge protective devices are characterized by their capacity to withstand impulse current with 10/350 µs wave form which simulate natural lightning current.
Type 1+2 ABB surge protective devices have a high impulse current withstand capacity with ensuring a low protection level (Up).
Type 1+2 SPDs can be installed at the entrance in the main switch board for a global protection of the electrical installation.

Poles	Impulse current Iimp 10/350	Max discharge current Imax 8/20	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
3	25	60 (*)	1.5	230/400	264	4053546114621	OVR T1-T2 3L 75-255 P TS	2CTB812751R2300	0.52
3	12.5	80	1.4	230/400	275	524911	OVR T1-T2 3L 12.5-275s P TS QS	2CTB815710R0600	0.45
3	12.5	80	1.4	230/400	275	524980	OVR T1-T2 3L 12.5-275s P QS	2CTB815710R1800	0.45
3	12.5	80	2	400/690	440	525154	OVR T1-T2 3L 12.5-440s P QS	2CTB815710R4700	0.90
3	12.5	80	1.9	400/690	440	525086	OVR T1-T2 3L 12.5-440s P TS QS	2CTB815710R3500	0.90
3	25	-	2.2	400/690	440	6941593468430	OVR T1-T2 3L 25-440s P QS	2TAM213000R4810	1.255
3	25	-	2.2	400/690	440	6941593468447	OVR T1-T2 3L 25-440s P TS QS	2TAM213000R4811	1.255

(*) Ipeak, extended feature similar to Imax

Protection and safety

OVR Type 1+2 surge protective devices TNS/TT 230 1Ph+N and 3Ph+N networks

Technical features

Types			
with auxiliary contact (TS)			**OVR T1-T2 1N 50-255 P TS**
Technology			Spark Gap
Electrical features			
Standard			IEC 61643-11 / EN 61643-11 UL 1449. 5th Edition
Type/test class			T1-T2 / I - II
Protected lines			1+N
System network			TN / TT
Type of current			AC 47-63Hz
Voltage regulation of the system network			± 10 %
Nominal system voltage Un		[V]	230
Max. cont. operating voltage Uc		[V]	255
Maximum impulse current Iimp (10/350)		[kA]	25
Max.Imp current Tot Iimp (10/350)		[kA]	50
Nominal discharge current In (8/20)		[kA]	25
Maximal discharge current Imax (8/20) kA, Ipeak (8/20)*		[kA]	60 (*)
Follow current interrupting rating Ifi		[kA]	50
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	≤ 1.5 / ≤ 1.5/ ≤ 1.8
Voltage protection level Ures at 3 kA		[kV]	-
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	440 V: 120 min / 1200 V
Response time		[ns]	≤ 100
Short-circuit withstand capability Isccr		[kA]	50 / -
Max Limitation / Extinction of mains follow currents (L-N)/(N-PE)		[kA]	100 / 0,1
Maximum Prospective Short-Circuit current on the point of installation		[kA]	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 315
	circuit breaker (B or C curve)	[A]	-
Pluggable cartridge			Yes
Integrated thermal disconnector			Yes
State indicator			Yes
Safety reserve			No
Auxiliary contact			Yes
Installation			
Wire range (L, N, PE)	solid wire, single wiring	[mm²]	10...35
	stranded wire, single wiring	[mm²]	10...50
Stripping length (L, N, PE)		[mm]	15.5
Tightening torque (L, N, PE)		[Nm]	7
Auxiliary contact (TS)			
Contacts information			1 NO - 1 NC
Min. load			5V DC - 10 mA
Max. load			250 V AC - 0,5A
Connection cross-section		[mm²]	0.5 ...1.5
Miscellanous characteristics			
Stocking and operating temperature		[°C]	[parallel] / [series] -40 to +80 / -40 to 60
Maximal Altitude		[m]	2000
Degree of protection			IP20 - Indoor
Fire resistance according to UL 94			V0
Dimensions			
height x width x depth		[mm]	
		[inches]	
Dimensions with auxilary contact (TS)			
height x width x depth		[mm]	99 x 72 x 72
		[inches]	3.86 x 2.80 x 2.85
Replacement Cartridges			
Phase Product ID			OVR T1-T2 1L 25-255 C 2CTB813252R2300
Neutral Product ID			OVR T1-T2 N 50-255 C 2CTB812522R2300

(*) Ipeak, extended feature similar to Imax

Protection and safety

OVR Type 1+2 surge protective devices TNS/TT 230 1Ph+N and 3Ph+N networks

		OVR T1-T2 3N 25-440s P QS
OVR T1-T2 3N 100-255 P TS	**OVR T1-T2 4L 100-255 P TS**	**OVR T1-T2 3N 25-440s P TS QS**
Spark Gap	Spark Gap	MOV by Varistor
IEC 61643-11 / EN 61643-11 UL 1449. 5th Edition	IEC 61643-11/EN 61643-11 UL 1449. 5th Edition	IEC 61643-11/EN 61643-11:2012/A11:2018
T1-T2 / I - II	T1-T2 / I - II	T1-T2/I - II
3+N	4	3+N
TNS / TT	TNS	TNS - TT (L-N)
AC 47-63Hz	AC 47-63Hz	AC 47-63 Hz
± 10 %	± 10 %	± 20 %
230/400	230/400	400/690
255	264	440
25	25	25
100	100	100
25	25	
60 (*)	60 (*)	-
50	50	-
≤ 1.5 / ≤ 1.5/ ≤ 1.8	≤ 3 / ≤ 1.5/ ≤ 1,5	≤ 2.2 / ≤ 1.9 / -
-	-	-
440 V: 120 min / 1200 V	440 V: 120 min / -	581 / 1640
≤ 100	≤ 100	<25
50 / -	50	100
100 / 0,1	100/100	100
100	100	100
≤ 315	≤ 315	≤ 315
-	-	-
Yes	Yes	Yes
Yes	Yes	Yes
Yes	Yes	Yes
No	No	Yes
Yes	Yes	Yes
10...35	10...35	2.5 - 50
10...50	10...50	2.5 - 35
15.5	15.5	15
7	7	2.5
1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC
5V DC - 10 mA	5V DC - 10 mA	5V DC - 10 mA
250 V AC - 0,5A	250 V AC - 0,5A	250 V AC - 0,5A
0.5 ...1.5	0.5 ...1.5	0.5 ...1.5
[parallel] / [series] -40 to +80 / -40 to 60	[parallel] / [series] -40 to +80 / -40 to 60	-40 to +80
2000	2000	2000
IP20 - Indoor	IP20 - Indoor	IP20 - Indoor
V0	V0	V0
		113 x 144 x 86.2
		4,45 x 5,64 x 3,40
99 x 144 x 72	99 x 144 x 72	114 x 144 x 86.2
3.86 x 5.60 x 2.85	3.86 x 5.60 x 2.85	4,48 x 5,64 x 3,40
OVR T1-T2 1L 25-255 C 2CTB813252R2300	OVR T1-T2 1L 25-255 C 2CTB813252R2300	OVR T1-T2 25-440s C QS 2TAM210200R4810
OVR T1-T2 N 100-255 TT C 2CTB812022R2300	OVR T1-T2 1L 25-255 C 2CTB813252R2300	OVR T1-T2 N 100-440s C QS 2TAM210300R7300

Protection and safety

OVR Type 1+2 surge protective devices TNS/TT 230 1Ph+N and 3Ph+N networks

Technical features

Types			**OVR T1-T2 1N 12.5-275s P QS**
with auxiliary contact (TS)			**OVR T1-T2 1N 12.5-275s P TS QS**
Technology			Varistor + GDT
Electrical features			
Standard			IEC 61643-11/EN 61643-11:2012/A11:2018
Type/test class			T1-T2/I - II
Protected lines			1+1
System network			TT - TNS
Type of current			AC 47-63 Hz
Voltage regulation of the system network			± 20%
Nominal system voltage Un		[V]	230
Max. cont. operating voltage Uc		[V]	275
Maximum impulse current Iimp (10/350)		[kA]	12.5
Max.Imp current Tot Iimp (10/350)		[kA]	25
Nominal discharge current In (8/20)		[kA]	20
Maximal discharge current Imax (8/20) kA		[kA]	80
Follow current interrupting rating Ifi		[kA]	
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	≤ 1.4/ ≤ 1.4/ ≤ 1.5
Voltage protection level Ures at 3 kA		[kV]	0.5
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	337/1200
Response time		[ns]	≤ 25
Short-circuit withstand capability Isccr		[kA]	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 160
	circuit breaker (B or C curve)	[A]	≤ 125
Pluggable cartridge			Yes
Integrated thermal disconnector			Yes
State indicator			Yes
Safety reserve			Yes
Auxiliary contact			Yes (TS option)
Installation			
Wire range (L, N, PE)	solid wire, single wiring	[mm²]	2.5 ... 35
	stranded wire, single wiring	[mm²]	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5
Tightening torque (L, N, PE)		[Nm]	2.8
Auxiliary contact (TS)			
Contacts information			1 NO - 1 NC
Min. load			12 V DC - 10 mA
Max. load			250 V AC - 1A
Connection cross-section		[mm²]	0.5 ...1.5
Miscellanous characteristics			
Stocking and operating temperature		[°C]	-40 to +80
Maximal Altitude		[m]	5000
Degree of protection			IP 20 - Indoor
Fire resistance according to UL 94			V-0
Dimensions			
height x width x depth		[mm]	88 x 35.6 x 76.7
		[inches]	3.46 x 1.4 x 3.02
Dimensions with auxilary contact (TS)			
height x width x depth		[mm]	95.8 x 35.6 x 76.7
		[inches]	3.46 x 1.4 x 3.02
Replacement Cartridges			
Phase Product ID			OVR T1-T2 12.5-275s C QS 2CTB815710R2600
Neutral Product ID			OVR T1-T2 N 50-275s C QS 2CTB815710R2700

Protection and safety

OVR Type 1+2 surge protective devices TNS/TT 230 1Ph+N and 3Ph+N networks

OVR T1-T2 3N 12.5-275s P QS	**OVR T1-T2 4L 12.5-275s P QS**
OVR T1-T2 3N 12.5-275s P TS QS	**OVR T1-T2 4L 12.5-275s P TS QS**
Varistor + GDT	Varistor
IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018
T1-T2/I - II	T1-T2/I - II
3+1	3+N
TT - TNS	TNS
AC 47-63 Hz	AC 47-63 Hz
± 20%	± 20%
230/400	230/400
275	275
12.5	12.5
50	50
20	20
80	80
	-
≤ 1.4/ ≤ 1.4/ ≤ 1.5	≤ 2.8/ ≤ 1.4/ ≤ 1.4
0.5	0.5
337/1200	337/
≤ 25	≤ 25
100	100
≤ 160	≤ 160
≤ 125	≤ 125
Yes	Yes
Yes	Yes
Yes	Yes
Yes	Yes
Yes (TS option)	Yes (TS option)
2.5 ... 35	2.5 ... 35
2.5 ... 25	2.5 ... 25
12.5	12.5
2.8	2.8
1 NO - 1 NC	1 NO - 1 NC
12 V DC - 10 mA	12 V DC - 10 mA
250 V AC - 1A	250 V AC - 1A
0.5 ...1.5	0.5 ...1.5
-40 to +80	-40 to +80
5000	5000
IP 20 - Indoor	IP 20 - Indoor
V-0	V-0
88 x 71.2 x 76.7	88 x 71.2 x 76.7
3.46 x 2.8 x 3.02	3.46 x 2.8 x 3.02
95.8 x 71.2 x 76.7	95.8 x 71.2 x 76.7
3.77 x 2.8 x 3.02	3.77 x 2.8 x 3.02
OVR T1-T2 12.5-275s C QS 2CTB815710R2600	OVR T1-T2 12.5-275s C QS 2CTB815710R2600
OVR T1-T2 N 50-275s C QS 2CTB815710R2700	

Protection and safety

OVR Type 1+2 surge protective devices TNS/TT 400 V 1Ph+N and 3Ph+N networks

Technical features

Types			**OVR T1-T2 1N 12.5-440s P QS**	**OVR T1-T2 3N 12.5-440s P QS**	**OVR T1-T2 4L 12.5-440s P QS**
with auxiliary contact (TS)			**OVR T1-T2 1N 12.5-440s P TS QS**	**OVR T1-T2 3N 12.5-440s P TS QS**	**OVR T1-T2 4L 12.5-440s P TS QS**
Technology			Varistor + GDT	Varistor + GDT	Varistor
Electrical features					
Standard			IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018
Type/test class			T1-T2/I - II	T1-T2/I - II	T1-T2/I - II
Protected lines			1+1	3+1	4
System network			TT- TNS	TT- TNS	TNS
Type of current			AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 10%	± 10%	± 10%
Nominal system voltage Un		[V]	400	400/690	400/690
Max. cont. operating voltage Uc		[V]	440	440	440
Maximum impulse current Iimp (10/350)		[kA]	12.5	12.5	12.5
Max.Imp current Tot Iimp (10/350)		[kA]	25	50	50
Nominal discharge current In (8/20)		[kA]	20	20	20
Maximal discharge current Imax (8/20) kA		[kA]	80	80	80
Follow current interrupting rating Ifi		[kA]			
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	1.9/1.9/2	1.9/1.9/2	3.8/1.9/1.9
Voltage protection level Ures at 3 kA		[kV]	0.8	0.8	0.8
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	581/1200	581/1200	581/
Response time		[ns]	≤ 25	≤ 25	≤ 25
Short-circuit withstand capability Isccr		[kA]	100	100	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 160	≤ 160	≤ 160
	circuit breaker (B or C curve)	[A]	≤ 125	≤ 125	≤ 125
Pluggable cartridge			Yes	Yes	Yes
Integrated thermal disconnector			Yes	Yes	Yes
State indicator			Yes	Yes	Yes
Safety reserve			Yes	Yes	Yes
Auxiliary contact			Yes (TS option)	Yes (TS option)	Yes (TS option)
Installation					
Wire range (L, N, PE)	solid wire	[mm²]	2.5 ... 35	2.5 ... 35	2.5 ... 35
	stranded wire	[mm²]	2.5 ... 25	2.5 ... 25	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5	12.5	12.5
Tightening torque (L, N, PE)		[Nm]	2.8	2.8	2.8
Auxiliary contact (TS)					
Contacts information			1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC
Min. load			12 V DC - 10 mA	12 V DC - 10 mA	12 V DC - 10 mA
Max. load			250 V AC - 1 A	250 V AC - 1 A	250 V AC - 1 A
Connection cross-section		[mm²]	1.5	1.5	1.5
Miscellanous characteristics					
Stocking and operating temperature		[°C]	-40 to +80	-40 to +80	-40 to +80
Maximal Altitude		[m]	5000	5000	5000
Degree of protection			IP 20 - Indoor	IP 20 - Indoor	IP 20 - Indoor
Fire resistance according to UL 94			V-0	V-0	V-0
Dimensions					
height x width x depth		[mm]	88 x 53.4 x 76.7	88 x 124.6 x 76.7	88 x 142.4 x 76.7
		[in]	3.46 x 2.1 x 3.02	3.46 x 4.91 x 3.02	3.46 x 5.61 x 3.02
Dimensions with auxilary contact (TS)					
height x width x depth		[mm]	95.8 x 53.4 x 76.7	95.8 x 124.6 x 76.7	95.8 x 142.4 x 76.7
		[in]	3.77 x 2.1 x 3.02	3.77 x 4.91 x 3.02	3.77 x 5.61 x 3.02
Replacement Cartridges					
Phase Product ID			OVR T1-T2 12.5-440s C QS 2CTB815710R5500	OVR T1-T2 12.5-440s C QS 2CTB815710R5500	OVR T1-T2 12.5-440s C QS 2CTB815710R5500
Neutral Product ID			OVR T1-T2 N 50-440s C QS 2CTB815710R5600	OVR T1-T2 N 50-440s C QS 2CTB815710R5600	

Protection and safety

OVR Type 1+2 surge protective devices TNS/TT 400 V 1Ph+N and 3Ph+N networks

OVR T1-T2 1N 12.5-440s P TS QS

Type 1+2 surge protective devices are designed to discharge high current surges without any destruction of the installation. These surge protective devices are characterized by their capacity to withstand impulse current with 10/350 µs wave form which simulate natural lightning current.
Type 1+2 ABB surge protective devices have a high impulse current withstand capacity with ensuring a low protection level (Up).
Type 1+2 SPDs can be installed at the entrance in the main switch board for a global protection of the electrical installation.

Poles	Impulse current Iimp 10/350	Max. discharge current Imax 8/20, Ipeak 8/20*	Follow current interrupting rating Ifi	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660 308	Order details		Weight 1 piece
	kA	kA	kA	kV	V	V	EAN	Type code	Order code	kg
1+1	25	60 (*)	50	1.5	230	255	4053546114614	OVR T1-T2 1N 50-255 P TS	2CTB812511R2300	0.46
3+1	25	60 (*)	50	1.5	230/400	255	4053546114645	OVR T1-T2 3N 100-255 P TS	2CTB812111R2300	0.54
4	25	60 (*)	50	1.5	230/400	264	4053546114638	OVR T1-T2 4L 100-255 P TS	2CTB812101R2300	0.54
1+1	12.5	80	-	1.4	230	275	524966	OVR T1-T2 1N 12.5-275s P QS	2CTB815710R1300	0.30
1+1	12.5	80	-	1.4	230	275	524898	OVR T1-T2 1N 12.5-275s P TS QS	2CTB815710R0100	0.30
1+1	12.5	80	-	1.9	400	440	525130	OVR T1-T2 1N 12.5-440s P QS	2CTB815710R4200	0.45
1+1	12.5	80	-	1.9	400	440	525062	OVR T1-T2 1N 12.5-440s P TS QS	2CTB815710R3000	0.45
3+1	12.5	80	-	1.4	230/400	275	524997	OVR T1-T2 3N 12.5-275s P QS	2CTB815710R1900	0.60
3+1	12.5	80	-	1.4	230/400	275	524928	OVR T1-T2 3N 12.5-275s P TS QS	2CTB815710R0700	0.60
3+1	12.5	80	-	1.9	400/690	440	525161	OVR T1-T2 3N 12.5-440s P QS	2CTB815710R4800	1.05
3+1	12.5	80	-	1.9	400/690	440	525093	OVR T1-T2 3N 12.5-440s P TS QS	2CTB815710R3600	1.05
4	12.5	80	-	1.4	230/400	275	525017	OVR T1-T2 4L 12.5-275s P QS	2CTB815710R2300	0.60
4	12.5	80	-	1.4	230/400	275	524942	OVR T1-T2 4L 12.5-275s P TS QS	2CTB815710R1100	0.60
4	12.5	80	-	1.9	400/690	440	525185	OVR T1-T2 4L 12.5-440s P QS	2CTB815710R5200	1.20
4	12.5	80	-	1.9	400/690	440	525116	OVR T1-T2 4L 12.5-440s P TS QS	2CTB815710R4000	1.20
1	25	-	-	2.2	400/690	440	6941593468454	OVR T1-T2 3N 25-440s P QS	2TAM214100R4810	1.481
1	25	-	-	2.2	400/690	440	6941593468461	OVR T1-T2 3N 25-440s P TS QS	2TAM214100R4811	1.481

(*) Ipeak, extended feature similar to Imax

Protection and safety

OVR Type 2 surge protective devices non pluggable

Technical features

Types			**OVR T2 20-275**	**OVR T2 40-275**
with auxiliary contact (TS)			-	-
Technology			Varistor	Varistor
Electrical features				
Standard			IEC 61643-11/EN 61643-11	IEC 61643-11/EN 61643-11
Type/test class			T2/II	T2/II
Protected lines			1	1
Types of networks			TT(L-N)-TNS-TNC	TT(L-N)-TNS-TNC
Type of current			AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 20 %	± 20 %
Nominal AC voltage Un		[V]	230	230
Max. cont. operating AC voltage Uc		[V]	275	275
Maximum discharge current Imax (8/20)		[kA]	20	40
Nominal discharge current In (8/20)		[kA]	5	20
Voltage protection level Up at In		[kV]	1.5	1.4
Voltage protection level Up at 3 kA		[kV]	0.9	0.9
TOV (Temporary overvoltage) withstand Ut (L-N: 5s/N-PE: 200ms)		[V]	337/-	337/-
Response time		[ns]	≤ 25	≤ 25
Residual current IPE		[µA]	≤110	≤110
Short-circuit withstand capability Isccr		[kA]	50	50
Backup protection maximum rating	fuse (gG)	[A]	≤ 50	≤ 50
	circuit breaker (B or C curve)	[A]	≤ 50	≤ 50
Pluggable cartridge			No	No
Integrated thermal disconnector			Yes	Yes
State indicator			Yes	Yes
Safety reserve			No	No
Auxiliary contact (TS)			No	No
Installation				
Wire range (L, N, PE)	solid wire	[mm²]	2.5…25	2.5…25
	stranded wire	[mm²]	2.5…16	2.5…16
Stripping length (L, N, PE)		[mm]	12.2	12.2
Tightening torque (L, N, PE)		[Nm]	2.5	2.5
Auxiliary contact (TS)				
Contact complement			–	–
Min. load			–	–
Max. load			–	–
Connection cross-section		[mm²]	–	–
Miscellanous characteristics				
Stocking and operating temperature		[°C]	-40 to +80	-40 to +80
Maximal Altitude		[m]	2000	2000
Degree of protection			IP 20	IP 20
Fire resistance according to UL 94			V-0	V-0
Dimensions				
height x width x depth		[mm]	85 x 17.8 x 64.8	85 x 17.8 x 64.8
		[in]	3.35 x 0.70 x 2.55	3.35 x 0.70 x 2.55

Protection and safety

OVR Type 2 surge protective devices non pluggable

Type 2 surge protective devices are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (Up). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Type 2 non pluggable - Uc 275 V

Poles	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
1	20	5	1.5	230/400	275	514882	OVR T2 20-275	2CTB804200R0100	0.12
1	40	20	1.4	230/400	275	514103	OVR T2 40-275	2CTB804201R0100	0.12
1	20	5	1.5	230/400	275	519382	OVR T2 20-275 (x20)	2CTB804200R1100	0.12
1	40	20	1.4	230/400	275	519412	OVR T2 40-275 (x20)	2CTB804201R1100	0.12

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices Single pole 230 V networks

Technical features

Types			**OVR T2 40-275 P QS**	**OVR T2 40-275s P QS**
with auxiliary contact (TS)			**OVR T2 40-275 P TS QS**	**OVR T2 40-275s P TS QS**
Technology			Varistor	Varistor
Electrical features				
Standard			IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018
Type/test class			T2/II	T2/II
Protected lines			1	1
System network			TT(L-N)-TNS-TNC	TT(L-N)-TNS-TNC
Type of current			AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 20%	± 20%
Nominal system voltage Un		[V]	230	230
Max. cont. operating voltage Uc		[V]	275	275
Nominal dc voltage Un dc L-PE		[V dc]	320	-
Max. dc. cont. operating voltage Ucdc L-PE		[V dc]	355	-
Maximum discharge current Imax (8/20)		[kA]	40	40
Maximum impulse current Iimp (10/350)		[kA]	2	2
Nominal discharge current In (8/20)		[kA]	20	20
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	1.25/-/1.25	1.4/-/1.4
Voltage protection level Ures at 3kA (L-N)		[kV]	0.8	0.5
Voltage protection level Ures at 5kA (L-N)		[kV]	0.85	0.7
Voltage protection level Ures at 10kA (L-N)		[kV]	1	0.9
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	337/-	337/-
Response time		[ns]	≤ 25	≤ 25
Short-circuit withstand capability Isccr		[kA]	100	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 125	≤ 160
	circuit breaker (B or C curve)	[A]	≤ 125	≤ 125
Pluggable cartridge			Yes	Yes
Integrated QuickSafe® technology			Yes	Yes
State indicator			Yes	Yes
Safety reserve			No	Yes
Auxiliary contact			Yes (TS option)	Yes (TS option)
Installation				
Wire range (L, N, PE)	solid wire	[mm²]	2.5 ... 35	2.5 ... 35
	stranded wire	[mm²]	2.5 ... 25	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5	12.5
Tightening torque (L, N, PE)		[Nm]	2.8	2.8
Auxiliary contact (TS)				
Contacts information			1 NO - 1 NC	1 NO - 1 NC
Min. load			12 V DC - 10 mA	12 V DC - 10 mA
Max. load			250 V AC - 1 A	250 V AC - 1 A
Connection cross-section		[mm²]	1.5	1.5
Miscellanous characteristics				
Stocking and operating temperature		[°C]	-40 to +80	-40 to +80
Maximal Altitude		[m]	5000	5000
Degree of protection			IP 20	IP 20
Fire resistance according to UL 94			V0	V0
Dimensions				
height x width x depth		[mm]	88 x 17.8 x 65.3	88 x 17.8 x 76.7
		[inches]	3.46 x 0.7 x 2.57	3.46 x 0.7 x 3.02
With Auxiliary Contact (TS)				
height x width x depth		[mm]	95.8 x 17.8 x 65.3	95.8 x 17.8 x 76.7
		[inches]	3.77 x 0.7 x 2.57	3.77 x 0.7 x 3.02
Replacement Cartridges				
Phase Product ID			OVR T2 40-275 C QS 2CTB803876R1000	OVR T2 40-275s C QS 2CTB815704R2600
Neutral Product ID			-	-

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices Single pole 230 V networks

OVR T2 40-350 P QS **OVR T2 40-350 P TS QS**	**OVR T2 80-275s P QS** **OVR T2 80-275s P TS QS**	**OVR T2-T3 N 80-275 P QS**	**OVR T2 N 80-350 P QS**	**OVR T2 N 80-275s P QS**
Varistor	Varistor	GDT	GDT	GDT
IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018
T2/II	T2/II	T2-T3/II-III	T2/II	T2
1	1	1	1	1
TT(L-N)-TNS-TNC	TT(L-N)-TNS-TNC	TT (N-PE)-TNS(N-PE)	TT (N-PE)-TNS(N-PE)	TT(N-PE)-TNS(N-PE)
AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
± 50%	± 20%	± 20%	± 50%	± 20%
230	230	230	230	230
350	275	275	350	275
375	-	-	-	-
415	-	-	-	-
40	80	80	80	80
2	6.25	2	2	6.25
20	20	30	30	30
1.5/-/1.5	1.4/-/1.4	-/1.4/-	-/1.4/-	-/1.4/-
1	0.5	-	-	-
1.05	0.7	-	-	-
1.2	0.9	-	-	-
455/-	337/	-/1200	-/1200	-/1200
≤ 25	≤ 25	< 25	< 25	< 25
100	100	-	-	100
≤ 125	≤ 160	≤ 125	≤ 125	≤160
≤ 125	≤ 125	≤ 125	≤ 125	≤125
Yes	Yes	Yes	Yes	Yes
Yes	Yes	-	-	-
Yes	Yes	No	No	No
No	Yes	No	No	No
Yes (TS option)	Yes (TS option)	No	No	No
2.5 ... 35	2.5 ... 35	2.5 ... 35	2.5 ... 35	2.5 ... 35
2.5 ... 25	2.5 ... 25	2.5 ... 25	2.5 ... 25	2.5 ... 25
12.5	12.5	12.5	12.5	15
2.8	2.8	2.8	2.8	3.5
1 NO- 1 NC	1 NO- 1 NC	-	-	-
12 V DC - 10 mA	12 V DC - 10 mA	-	-	-
250 V AC - 1 A	250 V AC - 1 A	-	-	-
1.5	1.5	-	-	-
-40 to +80	-40 to +80	-40 to +80	-40 to +80	-40 to +80
5000	5000	5000	5000	5000
IP 20	IP 20 - Indoor	IP 20 - Indoor	IP 20 - Indoor	IP 20 - Indoor
V0	V-0	V-0	V-0	V0
88 x 17.8 x 65.3	88 x 17.8 x 76.7	88 x 17.8 x 65.3	88 x 17.8 x 65.3	88 x 17.8 x 76.7
3.46 x 0.7 x 2.57	3.46 x 0.7 x 3.02	3.46 x 0.7 x 3.02	3.46 x 0.7 x 3.02	3.45 x 0.7 x 3.02
95.8 x 17.8 x 65.3	95.8 x 17.8 x 76.7	-	-	-
3.77 x 0.7 x 2.57	3.77 x 0.7 x 3.02	-	-	-
OVR T2 40-350 C QS 2CTB803886R1000	OVR T2 80-275s C QS 2CTB815708R2600	-	-	-
-	-	OVR T2-T3 N 80-275 C QS 2CTB803876R0000	OVR T2 N 80-350 C QS 2CTB803886R0000	OVR T2 N 80-275s C QS 2CTB815708R2800

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices Single pole 230 V networks

OVR T2 40-275 P QS

Type 2 surge protective devices are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (Up). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Type 2 pluggable

Poles	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
1	40	20	1.25	230	275	519580	OVR T2 40-275 P QS	2CTB803871R2300	0.12
1	40	20	1.25	230	275	519597	OVR T2 40-275 P TS QS	2CTB803871R1700	0.12
1	40	20	1.4	230	275	525291	OVR T2 40-275s P QS	2CTB815704R1200	0.15
1	40	20	1.4	230	275	525222	OVR T2 40-275s P TS QS	2CTB815704R0000	0.15
1	40	20	1.5	230	350	520609	OVR T2 40-350 P QS	2CTB803881R2300	0.12
1	40	20	1.5	230	350	520562	OVR T2 40-350 P TS QS	2CTB803881R1700	0.12
1	80	20	1.4	230	275	525475	OVR T2 80-275s P QS	2CTB815708R1200	0.15
1	80	20	1.4	230	275	525406	OVR T2 80-275s P TS QS	2CTB815708R0000	0.15
1	80	30	1.4	230	275	519658	OVR T2 N 80-350 P QS	2CTB803983R1900	0.12
1	80	30	1.4	230	275	519641	OVR T2-T3 N 80-275 P QS	2CTB803973R1900	0.12
1	80	30	1.4	230	275	525536	OVR T2 N 80-275s P QS	2CTB815708R2500	0.12

Notes

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices Single pole 400 V networks

Technical features

Types			**OVR T2 40-440 P QS**	**OVR T2 40-440s P QS**
with auxiliary contact (TS)			**OVR T2 40-440 P TS QS**	**OVR T2 40-440s P TS QS**
Technology			Varistor	Varistor
Electrical features				
Standard			IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018
Type/test class			T2/II	T2/II
Protected lines			1	1
System network			TNC - TT(L-N) - TNS - IT (230 V)	TNC - TT(L-N) - TNS - IT (230 V)
Type of current			AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 10%	± 10%
Nominal system voltage Un		[V]	400	400
Max. cont. operating voltage Uc		[V]	440	440
Nominal dc voltage Un dc L-PE		[V dc]	495	-
Max. dc. cont. operating voltage Ucdc L-PE		[V dc]	545	-
Maximum discharge current Imax (8/20)		[kA]	40	40
Maximum impulse current Iimp (10/350)		[kA]	2	2
Nominal discharge current In (8/20)		[kA]	20	20
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	1.8/-/1.8	1.8/-/1.8
Voltage protection level Ures at 3kA (L-N)		[kV]	1.25	0.8
Voltage protection level Ures at 5kA (L-N)		[kV]	1.35	1.2
Voltage protection level Ures at 10kA (L-N)		[kV]	1.55	1.55
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	581/-	581/-
Uoc		[kV]	-	-
Response time		[ns]	≤ 25	≤ 25
Short-circuit withstand capability Isccr		[kA]	100	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 125	≤ 160
	circuit breaker (B or C curve)	[A]	≤ 125	≤ 125
Pluggable cartridge			Yes	Yes
Integrated QuickSafe® technology			Yes	Yes
State indicator			Yes	Yes
Safety reserve			No	Yes
Auxiliary contact			Yes (TS option)	Yes (TS option)
Installation				
Wire range (L, N, PE)	solid wire	[mm²]	2.5 ... 35	2.5 ... 35
	stranded wire	[mm²]	2.5 ... 25	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5	12.5
Tightening torque (L, N, PE)		[Nm]	2.8	2.8
Auxiliary contact (TS)				
Contacts information			1 NO - 1 NC	1 NO - 1 NC
Min. load			12 V DC - 10 mA	12 V DC - 10 mA
Max. load			250 V AC - 1 A	250 V AC - 1A

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices Single pole 400 V networks

OVR T2 80-440s P QS **OVR T2 80-440s P TS QS**	**OVR T2-T3 N 80-440 P QS**	**OVR T2 N 80-440s P QS**
Varistor	GDT	GDT
IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018
T2/II	T2-T3/II-III	T2
1	1	1
TNC -TT(L-N) - TNS - IT (230 V)	TT (N-PE)-TNS(N-PE)	TT(N-PE)-TNS(N-PE)
AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
± 10%	± 10%	± 10%
400	400	400
440	440	440
-	-	-
-	-	-
80	80	80
6.25	2	6.25
20	30	30
1.8/-/1.8	-/1.4/-	-/2/-
0.8	-	-
1.2	-	-
-	-	-
581/-	-/1200	-/1200
-	-	
≤ 25	< 25	< 25
100	-	100
≤ 160	≤ 125	≤ 160 A
≤ 125	≤ 125	≤ 160 A
Yes	Yes	No
Yes	Yes	-
Yes	Yes	No
Yes	No	No
Yes (TS option)	No	No
2.5 ... 35	2.5 ... 35	2.5 ... 35
2.5 ... 25	2.5 ... 25	2.5 ... 25
12.5	12.5	15
2.8	2.8	3.5
1 NO - 1 NC	-	-
12 V DC - 10 mA	-	-
250 V AC - 1A	-	-

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices Single pole 400 V networks

Technical features

Types		**OVR T2 40-440 P QS**	**OVR T2 40-440s P QS**
with auxiliary contact (TS)		**OVR T2 40-440 P TS QS**	**OVR T2 40-440s P TS QS**
Connection cross-section	[mm²]	1.5	1.5
Miscellanous characteristics			
Stocking and operating temperature	[°C]	-40 to +80	-40 to +80
Maximal Altitude	[m]	5000	5000
Degree of protection		IP 20	IP 20
Fire resistance according to UL 94		V0	V-0
Dimensions of packing			
height x width x depth	[mm]	88 x 17.8 x 65.3	88 x 17.8 x 76.7
	[inches]	3.46 x 0.7 x 2.57	3.46 x 0.7 x 3.02
With Auxiliary Contact (TS)			
height x width x depth	[mm]	95.8 x 17.8 x 65.3	95.8 x 17.8 x 76.7
	[inches]	3.77 x 0.7 x 2.57	3.77 x 0.7 x 3.02
Replacement Cartridges			
Phase Product ID		OVR T2 40-440 C 2CTB803876R0400	OVR T2 40-440s C QS 2CTB815704R5500
Neutral Product ID		-	-

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices Single pole 400 V networks

OVR T2 80-440s P QS	**OVR T2-T3 N 80-440 P QS**	**OVR T2 N 80-440s P QS**
OVR T2 80-440s P TS QS		
1.5		1.5
-40 to +80	-40 to +80	-40 to +80
5000	5000	5000
IP 20	IP 20	IP 20
V-0	V-0	V0
88 x 17.8 x 76.7	88 x 17.8 x 65.3	88 x 17.8 x 76
3.46 x 0.7 x 3.02	3.46 x 0.7 x 2.57	3.46 x 0.7 x 2.99
95.8 x 17.8 x 76.7		
3.77 x 0.7 x 3.02		
OVR T2 80-440s C QS 2CTB815708R5500	-	
-	OVR T2-T3 N 80-440 C QS 2CTB803886R0100	OVR T2 N 80-440s C QS 2CTB815708R2800

Type 2 surge protective devices are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (Up). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Type 2 pluggable

Poles	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
1	40	20	1.8	400	440	519627	OVR T2 40-440 P QS	2CTB803871R1200	0.12
1	40	20	2	400	440	519634	OVR T2 40-440 P TS QS	2CTB803871R0500	0.12
1	40	20	1.8	400	440	525338	OVR T2 40-440s P QS	2CTB815704R4100	0.30
1	40	20	1.8	400	440	525369	OVR T2 40-440s P TS QS	2CTB815704R2900	0.30
1	80	20	1.8	400	440	525567	OVR T2 80-440s P QS	2CTB815708R4100	0.30
1	80	20	1.8	400	440	525567	OVR T2 80-440s P TS QS	2CTB815708R2900	0.30
1	80	30	1.4	400	440	519665	OVR T2-T3 N 80-440 P QS	2CTB803973R2000	0.12
1	80	30	2	400	440	525642	OVR T2 N 80-440s P QS	2CTB815708R5400	0.12

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices
TNC 230 V networks

Technical features

Types			**OVR T2 3L 40-275 P QS**	**OVR T2 3L 40-275s P QS**	**OVR T2 3L 80-275s P QS**	**OVR T2 3L 40-350 P QS**
with auxiliary contact (TS)			**OVR T2 3L 40-275 P TS QS**	**OVR T2 3L 40-275s P TS QS**	**OVR T2 3L 80-275s P TS QS**	**OVR T2 3L 40-350 P TS QS**
Technology			Varistor	Varistor	Varistor	Varistor
Electrical features						
Standard			IEC 61643-11/ EN 61643-11:2012/ A11:2018	IEC 61643-11/ EN 61643-11:2012/ A11:2018	IEC 61643-11/ EN 61643-11:2012/ A11:2018	IEC 61643-11/ EN 61643-11:2012/ A11:2018
Type/test class			T2/II	T2/II	T2/II	T2/II
Protected lines			3	3	3	3
System network			TNC	TNC	TNC	TNC
Type of current			AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 20%	± 20%	± 20%	± 50%
Nominal system voltage Un (L-PEN/L-L)		[V]	230/400	230/400	230/400	230/400
Max. cont. operating voltage Uc		[V]	275	275	275	350
Nominal dc voltage Un dc L-PE/Un dc L-L		[V dc]	320/640	-	-	375/750
Max. dc. cont. operating voltage Ucdc L-PE/Ucdc L-L		[V dc]	355/710	-	-	415/830
Maximum discharge current Imax (8/20)		[kA]	40	40	80	40
Maximum impulse current Iimp (10/350)		[kA]	2	2	6.25	2
Nominal discharge current In (8/20)		[kA]	20	20	20	20
Voltage protection level Up at In (L-PE)		[kV]	1.25	1.4	1.4	1.5
Voltage protection level Ures at 3kA		[kV]	0.8	0.5	0.5	1.0
Voltage protection level Ures at 5kA		[kV]	0.85	0.7	0.7	1.05
Voltage protection level Ures at 10kA		[kV]	1.0	0.9	0.9	1.2
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	337/-	337/-	337/-	455/-
Uoc		[kV]	-	-	-	-
Response time		[ns]	≤ 25	≤ 25	≤ 25	≤ 25
Short-circuit withstand capability Isccr		[kA]	100	100	100	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 125	≤ 160	≤ 160	≤ 125
	circuit breaker (B or C curve)	[A]	≤ 125	≤ 125	≤ 125	≤ 125
Pluggable cartridge			Yes	Yes	Yes	Yes
Integrated QuickSafe® technology			Yes	Yes	Yes	Yes
State indicator			Yes	Yes	Yes	Yes
Safety reserve			No	Yes	Yes	No
Auxiliary contact			Yes (TS option)	Yes (TS option)	Yes (TS option)	Yes (TS option)
Installation						
Wire range (L, N, PE)	solid wire	[mm²]	2.5 ... 35	2.5 ... 35	2.5 ... 35	2.5 ... 35
	stranded wire	[mm²]	2.5 ... 25	2.5 ... 25	2.5 ... 25	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5	12.5	12.5	12.5
Tightening torque (L, N, PE)		[Nm]	2.8	2.8	2.8	2.8
Auxiliary contact (TS)						
Contacts information			1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC
Min. load			12 DC - 10 mA	12 DC - 10 mA	12 DC - 10 mA	12 DC - 10 mA
Max. load			250 V AC - 1A	250 V AC - 1A	250 V AC - 1A	250 V AC - 1A
Connection cross-section		[mm²]	1.5	1.5	1.5	1.5
Miscellanous characteristics						
Stocking and operating temperature		[°C]	-40 to +80	-40 to +80	-40 to +80	-40 to +80
Maximal Altitude		[m]	5000	5000	5000	5000
Degree of protection			IP 20	IP 20	IP 20	IP 20
Fire resistance according to UL 94			V0	V-0	V-0	V0

Protection and safety

OVR Type 2 surge protective devices TNC 230 V networks, pluggable and non-pluggable versions

Technical features

Types		**OVR T2 3L 80-275s P QS**	**OVR T2 3L 40-350 P QS**
with auxiliary contact (TS)		**OVR T2 3L 80-275s P TS QS**	**OVR T2 3L 40-350 P TS QS**
Dimensions			
height x width x depth	[mm]	88 x 53.4 x 76.7	85 x 53.4 x 64.8
	[inches]	3.46 x 2.1 x 3.02	3.35 x 2.10 x 2.55
With Auxiliary Contact (TS)			
height x width x depth	[mm]	95.8 x 53.4 x 76.7	96 x 53.4 x 64.8
	[inches]	3.77 x 2.1 x 3.02	3.78 x 2.10 x 2.55
Replacement Cartridges			
Phase Product ID		OVR T2 80-275s C QS 2CTB8157084R2600	OVR T2 40-350 C QS 2CTB803886R1000
Neutral Product ID		-	-

OVR T2 3L 40-275 P QS

Type 2 surge protective devices are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (Up). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Type 2 pluggable

Poles	**Max discharge current Imax 8/20**	**Nominal discharge current In**	**Voltage protection level Up**	**Nominal voltage Un**	**Max. cont. operating voltage Uc**	**Bbn 3660308**	**Order details**		**Weight 1 piece**
	kA	**kA**	**kV**	**V**	**V**	**EAN**	**Type code**	**Order code**	**kg**
3	40	20	1.25	230/400	275	519825	OVR T2 3L 40-275 P QS	2CTB803873R2400	0.36
3	40	20	1.25	230/400	275	519832	OVR T2 3L 40-275 P TS QS	2CTB803873R2500	0.36
3	40	20	1.4	230/400	275	525253	OVR T2 3L 40-275s P TS QS	2CTB815704R0600	0.45
3	40	20	1.4	230/400	275	525314	OVR T2 3L 40-275s P QS	2CTB815704R1800	0.45
3	80	20	1.4	230/400	275	525437	OVR T2 3L 80-275s P TS QS	2CTB815708R0600	0.45
3	80	20	1.4	230/400	275	525499	OVR T2 3L 80-275s P QS	2CTB815708R1800	0.45
3	40	20	1.5	230/400	350	519849	OVR T2 3L 40-350 P QS	2CTB803883R2400	0.36
3	40	20	1.5	230/400	350	519856	OVR T2 3L 40-350 P TS QS	2CTB803883R2500	0.36

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices
TNC 400 V networks

Technical features

Types			**OVR T2 3L 40-440 P QS**	**OVR T2 3L 80-440s P QS**
with auxiliary contact (TS)			**OVR T2 3L 40-440 P TS QS**	**OVR T2 3L 80-440s P TS QS**
Technology			Varistor	Varistor
Electrical features				
Standard			IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018
Type/test class			T2/II	T2/II
Protected lines			3	3
System network			TNC - IT (230)	TNC - IT (230)
Type of current			AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 10%	± 10%
Nominal system voltage Un (L-PEN/L-L)		[V]	400/690	400/690
Max. cont. operating voltage Uc		[V]	440	440
Nominal dc voltage Un dc L-PE/Un dc L-L		[V dc]	495/990	-
Max. dc. cont. operating voltage Ucdc L-PE/Ucdc L-L		[V dc]	545/1090	-
Maximum discharge current Imax (8/20)		[kA]	40	80
Maximum impulse current Iimp (10/350)		[kA]	2	6.25
Nominal discharge current In (8/20)		[kA]	20	20
Voltage protection level Up at In (L-PE)		[kV]	1.8	2.1
Voltage protection level Ures at 3kA		[kV]	1.25	1.25
Voltage protection level Ures at 5kA		[kV]	1.35	1.35
Voltage protection level Ures at 10kA		[kV]	1.55	1.55
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	581/	581/-
Response time		[ns]	< 25	< 25
Short-circuit withstand capability Isccr		[kA]	100	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 125	≤ 160
	circuit breaker (B or C curve)	[A]	≤ 125	≤ 126
Pluggable cartridge			Yes	Yes
Integrated QuickSafe® technology			Yes	Yes
State indicator			Yes	Yes
Safety reserve			No	Yes
Auxiliary contact			Yes (TS option)	Yes (TS option)
Installation				
Wire range (L, N, PE)	solid wire	[mm²]	2.5 ... 35	2.5 ... 35
	stranded wire	[mm²]	2.5 ... 25	2.5 ... 25
Stripping length (L, N, PE)		[mm]	2.8	2.8
Tightening torque (L, N, PE)		[Nm]		
Auxiliary contact (TS)			1 NO - 1 NC	1 NO - 1 NC
Contacts information			12 DC - 10 mA	12 DC - 10 mA
Min. load			250 V AC - 1A	250 V AC - 1A
Max. load			1.5	1.5
Connection cross-section		[mm²]		
Miscellanous characteristics				
Stocking and operating temperature		°C	-40 to +80	-40 to +80
Maximal Altitude		[m]	5000	5000
Degree of protection			IP 20	IP 20
Fire resistance according to UL 94			V-0	V-0
Dimensions				

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices
TNC 400 V networks

Technical features

Types		**OVR T2 3L 40-440 P QS**	**OVR T2 3L 80-440s P QS**
with auxiliary contact (TS)		**OVR T2 3L 40-440 P TS QS**	**OVR T2 3L 80-440s P TS QS**
height x width x depth	mm	88 x 53.4 x 65.3	88 x 53.4 x 76.7
	inches	3.46 x 2.1 x 2.57	3.46 x 2.1 x 3.02
With Auxiliary Contact (TS)			
height x width x depth	mm	95.8 x 53.4 x 65.3	95.8 x 53.4 x 76.7
	inches	3.77 x 2.1 x 2.57	3.77 x 2.1 x 3.02
Replacement Cartridges			
Phase Product ID		OVR T2 40-440 C QS 2CTB803876R0400	OVR T2 80-440s C QS 2CTB815708R5500
Neutral Product ID		-	-

OVR T2 3L 40-440 P QS

Type 2 surge protective devices are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (Up). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Poles	**Max discharge current Imax 8/20**	**Nominal discharge current In**	**Voltage protection level Up**	**Nominal voltage Un**	**Max. cont. operating voltage Uc**	**Bbn 3660308**	**Order details**		**Weight 1 piece**
	kA	**kA**	**kV**	**V**	**V**	**EAN**	**Type code**	**Order code**	**kg**
3	40	20	1.8	400	440	519894	OVR T2 3L 40-440 P QS	2CTB803873R2800	0.45
3	40	20	1.8	400	440	519900	OVR T2 3L 40-440 P TS QS	2CTB803873R2700	0.45
3	80	20	2.1	400	440	525598	OVR T2 3L 80-440s P TS QS	2CTB815708R3500	0.45
3	80	20	2.1	400	440	525635	OVR T2 3L 80-440s P QS	2CTB815708R4700	0.45

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices
TNS 230 V networks

Technical features

Types			**OVR T2 4L 40-275 P QS**	**OVR T2 4L 40-275s P QS**	**OVR T2 4L 80-275s P QS**
with auxiliary contact (TS)			**OVR T2 4L 40-275 P TS QS**	**OVR T2 4L 40-275s P TS QS**	**OVR T2 4L 80-275s P TS QS**
Technology			Varistor	Varistor	Varistor
Electrical features					
Standard			IEC 61643-11/ EN 61643-11:2012/A11:2018	IEC 61643-11/ EN 61643-11:2012/A11:2018	IEC 61643-11/ EN 61643-11:2012/A11:2018
Type/test class			T2/II	T2/II	T2/II
Protected lines			4	4	4
Types of networks			TNS	TNS	TNS
Type of current			AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 20%	± 20%	± 20%
Nominal voltage Un (L-N/L-L)		[V]	230/400	230/400	230/400
Max. cont. operating AC voltage Uc		[V]	275	275	275
Nominal dc voltage Un dc L-PE/Un dc L-L		V dc	320/640	-	-
Max. dc. cont. operating voltage Ucdc L-PE/ Ucdc L-L		V dc	355/710	-	-
Maximum discharge current Imax (8/20)		[kA]	40	40	80
Nominal discharge current In (8/20)		[kA]	20	20	20
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kA]	2.5/1.25/1.25	2.8/1.4/1.4	2.8/1.4/1.4
Voltage protection level Up at 3 kA		[kA]	0.8	0.5	0.8
TOV (Temporary over-voltage) withstand Ut	(L-N: 5 s /N-PE: 200 ms)	[V]	334/-	337	334/-
Response time		[ns]	≤ 25	≤ 25	≤ 25
Short-circuit withstand capability Isccr		[kA]	100	100	100
Backup protection	Fuse (gG)	[A]	≤ 125	≤160	≤ 160
	Circuit breaker (B or C curve)	[A]	≤ 125	≤125	≤ 125
Pluggable cartridge			Yes	Yes	Yes
Integrated thermal disconnector			Yes	Yes	Yes
State indicator			Yes	Yes	Yes
Safety reserve			No	Yes	Yes
Auxiliary contact			Yes (TS option)	Yes (TS option)	Yes (TS option)
Installation					
Wire range (L, N, PE)	Solid wire	[mm²]	2.5 ... 35	2.5 ... 35	2.5 ... 35
	Stranded wire	[mm²]	2.5 ... 25	2.5 ... 25	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5	12.5	12.5
Tightening torque (L, N, PE)		[Nm]	2.5	2.5	2.5
Auxiliary contact (TS)					
Contact complement			1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC
Minimum load			12 V DC - 10 mA	12 V DC - 10 mA	12 V DC - 10 mA
Maximum load			250 V AC - 1 A	250 V AC - 1 A	250 V AC - 1 A
Connection cross-section		[mm²]	1.5	1.5	1.5
Miscellaneous characteristics					
Stocking and operating temperature		[°C]	-40 to +80	-40 to +80	-40 to +80
Maximal Altitude		[m]	5000	5000	5000
Degree of protection			IP20	IP 20	IP20
Fire resistance according to UL 94			V0	V0	V0
Dimensions	height x width x depth	[mm]	88 x 71.2 x 65.3	88 x 71.2 x 76.7	88 x 71.2 x 76.7
		[inches]	3.46 x 2.8 x 2.57	3.46 x 2.8 x 3.02	3.46 x 2.8 x 3.02
with auxiliary contact (TS)	height x width x depth	[mm]	95.8 x 71.2 x 65.3	95.8 x 71.2 x 76.7	95.8 x 71.2 x 76.7
		[inches]	3.77 x 2.8 x 2.57	3.77 x 2.8 x 3.02	3.77 x 2.8 x 3.02
Replacement Cartridges					
Phase Product ID			OVR T2 40-275 C QS 2CTB803876R1000	OVR T2 40-275s C QS 2CTB8157084R2600	OVR T2 80-275s C QS 2CTB815708R2600
Neutral Product ID			-	-	-

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices
TNS 230 V networks

OVR T2 4L 40-275 P QS

Type 2 surge protective devices are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (Up). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Type 2 pluggable - Uc 275 V

Poles	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
4	40	20	1.25	230/400	275	520548	OVR T2 4L 40-275 P QS	2CTB803873R5600	0.45
4	40	20	1.25	230/400	275	520555	OVR T2 4L 40-275 P TS QS	2CTB803873R5200	0.45
4	40	20	1.4	230/400	275	525345	OVR T2 4L 40-275s P QS	2CTB815704R2300	0.45
4	40	20	1.4	230/400	275	525284	OVR T2 4L 40-275s P TS QS	2CTB815704R1100	0.45
4	80	20	1.4	230/400	275	525529	OVR T2 4L 80-275s P QS	2CTB815708R2300	0.45
4	80	20	1.4	230/400	275	525468	OVR T2 4L 80-275s P TS QS	2CTB815708R1100	0.45

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices TNS 400 V networks

Technical features

Types		**OVR T2 4L 40-440 P QS**	**OVR T2 4L 80-440s P QS**
with auxiliary contact (TS)		**OVR T2 4L 40-440 P TS QS**	**OVR T2 4L 80-440s P TS QS**
Technology		Varistor	Varistor
Electrical features			
Standard		IEC 61643-11/EN 61643-11:2012/A11:2018	IEC 61643-11/EN 61643-11:2012/A11:2018
Type/test class		T2/II	T2/II
Protected lines		4	4
System network		TNS	TNS
Type of current		AC 47-63 Hz	AC 47-63 Hz
Voltage regultaion of the system network		± 10%	± 10%
Nominal system voltage Un (L-N/L-L)	V	400/690	400/690
Max. cont. operating AC voltage Uc	V	440	440
Nominal dc voltage Un dc L-PE/Un dc L-L		495/990	-
Max. dc cont. Operating voltage Ucdc L-PE/ Ucdc L-L		545/1090	-
Maximal discharge current Imax (8/20)	kA	40	80
Maximum impulse current Iimp (10/350)	kA	2	6.25
Nominal discharge current In (8/20)	kA	20	20
Follow current interrupting rating Ifi	kA	-	-
Voltage protection level Up at In (L-N/N-PE/L-PE)	kV	3.6/1.8/1.8	3.6/1.8/1.8
Voltage protection level Ures at 3 kA	kV	1.25	-
Voltage protection level Ures at 5 kA		1.35	-
Voltage protection level Ures at 10 kA		1.55	-
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)	V	581/	581/
Response time	ns	≤25	≤25
Short-circuit withstand capability Isccr	kA	100	100
Backup protection maximum rating			
fuse (gG)	A	≤125	≤160
circuit breaker (B or C curve)	A	≤125	≤125
Pluggable cartridge		Yes	Yes
Integrated thermal disconnector		Yes	Yes
State indicator		Yes	Yes
Safety reserve		No	Yes
Auxiliary contact		Yes (TS option)	Yes (TS option)
Installation			
Wire range (L, N, PE) solid wire	mm²	2.5 ... 35	2.5 ... 35
stranded wire	mm²	2.5 ... 25	2.5 ... 25
Stripping length (L, N, PE)	mm	12.5	12.5
Tightening torque (L, N, PE)	Nm	2.5	2.5
Auxiliary contact (TS)		-	-
Contacts information		1 NO - 1 NC	1 NO - 1 NC
Min. load		12 V DC - 10 mA	12 V DC - 10 mA
Max. load		250 V AC - 1 A	250 V AC - 1 A
Connection cross-section	mm²	1.5	1.5
Miscellanous characteristics			
Stocking and operating temperature	°C	-40 to +80	-40 to +80
Maximal Altitude	[m]	5000	5000
Degree of protection		IP 20	IP 20

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices TNS 400 V networks

Technical features

Types		**OVR T2 4L 40-440 P QS**	**OVR T2 4L 80-440s P QS**
with auxiliary contact (TS)		**OVR T2 4L 40-440 P TS QS**	**OVR T2 4L 80-440s P TS QS**
Fire resistance according to UL 94		V0	V0
Dimensions			
height x width x depth	mm	88 x 71.2 x 65.3	88 x 71.2 x 69.4
	inches	3.46 x 2.8 x 2.57	3.46 x 2.8 x 2.57
Dimensions with auxilary contact (TS)			
height x width x depth	mm	95.8 x 142.4 x 69	95 x 71.2 x 69.4
	inches	3.77 x 2.8 x 2.57	3.77 x 2.8 x 2.57
Replacement Cartdriges			
Phase Product ID		OVR T2 40-440 C QS	OVR T2 80-440s C QS
		2CTB803876R0400	2CTB815708R5500

OVR T2 4L 40-440 P TS QS

Type 2 surge protective devices are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (Up). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

OVR T2 Pluggable

Protected lines	**Max discharge current Imax 8/20**	**Nominal current In 8/20**	**Voltage protection level**	**Nominal voltage**	**Max. cont. operating voltage**	**Bbn 3660308**	**Order details**		**Weight 1 piece**
	kA		**Up kV**	**Un V**	**Uc V**	**EAN**	**Type code**	**Order code**	**kg**
4	40	20	1,8	440	440	519894	OVR T2 4L 40-440 P QS	2CTB803873R5100	0.45
4	40	20	1,8	440	440	519900	OVR T2 4L 40-440 P TS QS	2CTB803873R5300	0.45
4	80	20	1,8	440	440	525635	OVR T2 4L 80-440s P QS	2CTB815708R5200	0.6
4	80	20	1,8	440	440	525598	OVR T2 4L 80-440s P TS QS	2CTB815708R4000	0.6

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices TNS/TT 230 and 400 V 1Ph+N networks

Technical features

Types			**OVR T2 1N 40-275 P QS**	**OVR T2 1N 40-275s P QS**	**OVR T2 1N 80-275s P QS**	**OVR T2 1N 40-350 P QS**	
with auxiliary contact (TS)			**OVR T2 1N 40-275 P TS QS**	**OVR T2 1N 40-275s P TS QS**	**OVR T2 1N 80-275s P TS QS**	**OVR T2 1N 40-350 P TS QS**	**OVR T2 1N 40-440 P TS QS**
Technology			Varistor + GDT	Varistor + GDT	Varistor + GDT	Varistor + GDT	Varistor + GDT
Electrical features							
Standard			IEC 61643-11/ EN 61643-11:2012/ A11:2018	IEC 61643-11/ EN 61643-11:2012/ A11:2018	IEC 61643-11/ EN 61643-11:2012/ A11:2018	IEC 61643-11/EN 61643-11:2012/ A11:2018	IEC 61643-11/ EN 61643-11:2012/ A11:2018
Type/test class			T2/II	T2/II	T2/II	T2/II	T2/II
Protected lines			1+1	1+1	1+1	1+1	1+1
System network			TT - TNS	TT - TNS	TT - TNS	TT - TNS	TT-TNS
Type of current			AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 20%	± 20%	± 20%	± 50%	±10 %
Nominal system voltage Un		[V]	230	230	230	230	400
Max. cont. operating voltage Uc		[V]	275	275	275	350	440
Maximum discharge current Imax (8/20)		[kA]	40	40	80	40	40
Maximum impulse current Iimp (10/350)		[kA]	2	2	6.25	2	2
Nominal discharge current In (8/20)		[kA]	20	20	20	20	20
Total Current		[kA]	80	80	80	80	80
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	1.25/1.4/1.5	1.4/1.4/1.5	1.4/1.4/1.5	1.5/1.4/1.6	1,8/1,4/1,9
Voltage protection level Ures at 3 kA		[kV]	0.8/1.4/0.85	0.8/1.4/0.85	0.8/1.4/0.85	1.0/1.4/1.05	1,25/1,4/1,45
Voltage protection level Ures at 5 kA		[kV]	0.85/1.4/0.95	0.85/1.4/0.95	0.85/1.4/0.95	1.05/1.4/1.1	1,35/1,4/1,55
Voltage protection level Ures at 10 kA		[kV]	1/1.4/1.15	1/1.4/1.15	1/1.4/1.15	1.2/1.4/1.3	1,55/1,4/1,65
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	337/1200	337/1200	337/1200	455/1200	581/1200
Uoc		[kV]	-	-	-	-	-
Response time		[ns]	< 25	< 25	< 25	< 25	<25
Short-circuit withstand capability Isccr		[kA]	100	100	100	100	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 125	≤ 160	≤ 160	≤ 125	≤ 125
	circuit breaker (B or C curve)	[A]	≤ 125	≤ 125	≤ 125	≤ 125	≤ 125
Pluggable cartridge			Yes	Yes	Yes	Yes	Yes
Integrated QuickSafe® technology			Yes	Yes	Yes	Yes	Yes
State indicator			Yes	Yes	Yes	Yes	Yes
Safety reserve			No	Yes	Yes	No	No
Auxiliary contact			Yes (TS option)	Yes (TS option)	Yes (TS option)	Yes (TS option)	Yes
Installation							
Wire range (L, N, PE)	solid wire	[mm²]	2.5 ... 35	2.5 ... 35	2.5 ... 35	2.5 ... 35	2.5 ... 35
	stranded wire	[mm²]	2.5 ... 25	2.5 ... 25	2.5 ... 25	2.5 ... 25	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5	12.5	12.5	12.5	12.5
Tightening torque (L, N, PE)		[Nm]	2.8	2.8	2.8	2.8	2.8
Auxiliary contact (TS)							
Contacts information			1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC
Min. load			12 DC - 10 mA	12 DC - 10 mA	12 DC - 10 mA	12 DC - 10 mA	12 DC - 10 mA
Max. load			250 V AC - 1A	250 V AC - 1A	250 V AC - 1A	250 V AC - 1A	250 V AC - 1A
Connection cross-section		[mm²]	1.5	1.5	1.5	1.5	1.5
Miscellanous characteristics							
Stocking and operating temperature		°C	-40 to +80	-40 to +80	-40 to +80	-40 to +80	-40 to +80
Maximal Altitude		[m]	5000	5000	5000	5000	5000
Degree of protection			IP 20	IP 20	IP 20	IP 20	IP 20

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices TNS/TT 230 and 400 V 1Ph+N networks

Technical features

Types		OVR T2 1N 40-275 P QS	OVR T2 1N 40-275s P QS	OVR T2 1N 80-275s P QS	OVR T2 1N 40-350 P QS	
with auxiliary contact (TS)		**OVR T2 1N 40-275 P TS QS**	**OVR T2 1N 40-275s P TS QS**	**OVR T2 1N 80-275s P TS QS**	**OVR T2 1N 40-350 P TS QS**	**OVR T2 1N 40-440 P TS QS**
Fire resistance according to UL 94		V0	V-0	V-0	V0	V0
Dimensions						
height x width x depth	mm	88 x 35.6 x 65.3	88 x 35.6 x 76.7	88 x 35.6 x 76.7	88 x 35.6 x 65.3	
	inches	3.46 x 1.4 x 2.57	3.46 x 1.4 x 3.02	3.46 x 1.4 x 3.02	3.46 x 1.4 x 2.57	
With Auxiliary Contact (TS)						
height x width x depth	mm	95.8 x 35.6 x 65.3	95.8 x 35.6 x 76.7	95.8 x 35.6 x 76.7	95.8 x 35.6 x 65.3	95.8 x 35.6 x 65.3
	inches	3.77 x 1.4 x 2.57	3.77 x 1.4 x 3.02	3.77 x 1.4 x 3.02	3.77 x 1.4 x 2.57	3.77 x 1.4 x 2.57
Replacement Cartridges						
Phase Product ID		OVR T2 40-275 C QS 2CTB803876R1000	OVR T2 40-275s C QS 2CTB815704R2600	OVR T2 80-275s C QS 2CTB815708R2600	OVR T2 40-350 C QS 2CTB803886R1000	OVR T2 40-440 C QS 2CTB803876R0400
Neutral Product ID		OVR T2-T3 N 80-275 C QS 2CTB803876R0000	OVR T2 N 80-275s C QS 2CTB815708R2800	OVR T2 N 80-275s C QS 2CTB815708R2800	OVR T2 N 80-350 C QS 2CTB803886R0000	OVR T2 N 80-440 C QS 2CTB803886R0100

OVR T2 1N 40-275 P QS

Type 2 surge protective devices are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (Up).
They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Type 2 pluggable

Poles	Impluse Curent limp 10/350	Max discharge current Imax 8/20	Nominal current In	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kA	kV	V	V	EAN	Type code	Order code	kg
1+1	2	40	20	1.25	230	275	519696	OVR T2 1N 40-275 P QS	2CTB803972R1100	0.24
1+1	2	40	20	1.25	230	275	519702	OVR T2 1N 40-275 P TS QS	2CTB803972R0500	0.24
1+1	2	40	20	1.4	230	275	525239	OVR T2 1N 40-275s P TS QS	2CTB815704R0200	0.30
1+1	2	40	20	1.4	230	275	525307	OVR T2 1N 40-275s P QS	2CTB815704R1400	0.30
1+1	2	80	20	1.4	230	275	525413	OVR T2 1N 80-275s P TS QS	2CTB815708R0200	0.30
1+1	2	80	20	1.4	230	275	525482	OVR T2 1N 80-275s P QS	2CTB815708R1400	0.30
1+1	2	40	20	1.5	230	350	519719	OVR T2 1N 40-350 P QS	2CTB803982R1100	0.24
1+1	2	40	20	1.5	230	350	519726	OVR T2 1N 40-350 P TS QS	2CTB803982R0500	0.24
1+1	2	40	20	1.9	400	440	524577	OVR T2 1N 40-440 P TS QS	2CTB803972R1400	0.24

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices TNS/TT 230 and 400 V 3Ph+N networks

OVR T2 3N 40-275 P QS

Technical features

Types			**OVR T2 3N 40-275 P QS**	**OVR T2 3N 40-275s P QS**
with auxiliary contact (TS)			**OVR T2 3N 40-275 P TS QS**	**OVR T2 3N 40-275s P TS QS**
Technology			Varistor + GDT	Varistor + GDT
Electrical features				
Standard			IEC 61643-11/ EN 61643-11:2012/A11:2018	IEC 61643-11/ EN 61643-11:2012/A11:2018
Type/test class			T2/II	T2/II
Protected lines			3+1	3+1
System network			TT - TNS	TT - TNS
Type of current			AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 20%	± 20%
Nominal system voltage Un (L-N/L-L)		[V]	230/400	230/400
Max. cont. operating voltage Uc (L-N/L-L)		[V]	275/440	275/440
Maximum discharge current Imax (8/20)		[kA]	40	40
Maximum impulse current Iimp (10/350)		[kA]	2	2
Nominal discharge current In (8/20)		[kA]	20	20
Total Current		[kA]	80	80
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	1.25/1.4/1.5	1.4/1.4/1.5
Voltage protection level Ures at 3kA (L-N/N-PE /L-PE)		[kV]	0.8/1.4/0.85	0.8/1.4/0.85
Voltage protection level Ures at 5kA (L-N/N-PE /L-PE)		[kV]	0.85/1.4/0.95	0.85/1.4/0.95
Voltage protection level Ures at 10kA (L-N/N-PE /L-PE)		[kV]	1/1.4/1.15	1/1.4/1.15
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	337/1200	337/1200
Response time		[ns]	< 25	< 25
Short-circuit withstand capability Isccr		[kA]	100	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 125	≤ 160
	circuit breaker (B or C curve)	[A]	≤ 125	≤ 125
Pluggable cartridge			Yes	Yes
Integrated QuickSafe® technology			Yes	Yes
State indicator			Yes	Yes
Safety reserve			No	Yes
Auxiliary contact			Yes (TS option)	Yes (TS option)
Installation				
Wire range (L, N, PE)	solid wire	[mm²]	2.5 ... 35	2.5 ... 35
	stranded wire	[mm²]	2.5 ... 25	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5	12.5
Tightening torque (L, N, PE)		[Nm]	2.8	2.8
Auxiliary contact (TS)				
Contacts information			1 NO - 1 NC	1 NO - 1 NC
Min. load			12 DC - 10 mA	12 DC - 10 mA
Max. load			250 V AC - 1A	250 V AC - 1A
Connection cross-section		[mm²]	1.5	1.5
Miscellanous characteristics				
Stocking and operating temperature		[°C]	-40 to +80	-40 to +80
Maximal Altitude		[m]	5000	5000
Degree of protection			IP 20	IP 20
Fire resistance according to UL 94			V0	V-0
Dimensions				
height x width x depth		[mm]	88 x 71.2 x 65.3	88 x 71.2 x 76.7
		[inches]	3.46 x 2.8 x 2.57	3.46 x 2.8 x 3.02
With Auxiliary Contact (TS)				
height x width x depth		[mm]	95.8 x 71.2 x 65.3	95.8 x 71.2 x 76.7
		[inches]	3.77 x 2.8 x 2.57	3.77 x 2.8 x 3.02
Replacement Cartridges				
Phase Product ID			OVR T2 40-275 C QS 2CTB803876R1000	OVR T2 40-275s C QS 2CTB815704R2600
Neutral Product ID			OVR T2-T3 N 80-275 C QS 2CTB803876R0000	OVR T2 N 80-275s C QS 2CTB815708R2800

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices TNS/TT 230 and 400 V 3Ph+N networks

OVR T2 3N 80-275s P QS **OVR T2 3N 80-275s P TS QS**	**OVR T2 3N 40-350 P QS** **OVR T2 3N 40-350 P TS QS**	**OVR T2 3N 40-440 P QS** **OVR T2 3N 40-440 P TS QS**	**OVR T2 3N 40-440s P TS QS**	**OVR T2 3N 80-440s P QS** **OVR T2 3N 80-440s P TS QS**
Varistor + GDT	Varistor + GDT	Varistor + GDT	Varistor + GDT	Varistor + GDT
IEC 61643-11/ EN 61643-11:2012/A11:2018	IEC 61643-11/ EN 61643-11:2012/A11:2018	IEC 61643-11/ EN 61643-11:2012/A11:2018	IEC 61643-11/ EN 61643-11:2012/A11:2018	IEC 61643-11/ EN 61643-11:2012/A11:2018
T2/II	T2/II	T2/II	T2/II	T2/II
3+1	3+1	3+1	3+1	3+1
TT - TNS	TT - TNS	TT - TNS	TT - TNS	TT - TNS
AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
± 20%	± 50%	± 10%	± 10%	± 10%
230/440	230/400	400/690	400/690	400/690
275/440	350/600	440/760	440/760	440/760
80	40	40	40	80
6.25	2	2	2	6.25
20	20	20	20	20
80	80	80	80	80
1.4/1.4/1.5	1.5/1.4/1.7	1.8/1.4/2.1	1.8/2/2.1	1.8/2/2.1
0.8/1.4/0.85	1.0/1.4/1.05	1.25/1.4/1.45	1.25/1.4/1.45	1.25/1.4/1.45
0.85/1.4/0.95	1.05/1.4/1.1	1.35/1.4/1.45	1.35/1.4/1.45	1.35/1.4/1.45
1/1.4/1.15	1.2/1.4/1.3	1.55/1.4/1.65	1.55/1.4/1.65	1.55/1.4/1.65
337/1200	455/1200	581/1200	581/1200	581/1200
< 25	< 25	< 25	< 26	< 25
100	100	100	100	100
≤ 160	≤ 125	≤ 125	≤ 160	≤ 160
≤ 125	≤ 125	≤ 125	≤ 125	≤ 125
Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes
Yes	No	No	Yes	Yes
Yes (TS option)	Yes (TS option)	Yes (TS option)	Yes	Yes (TS option)
2.5 ... 35	2.5 ... 35	2.5 ... 35	2.5 ... 35	2.5 ... 35
2.5 ... 25	2.5 ... 25	2.5 ... 25	2.5 ... 25	2.5 ... 25
12.5	12.5	12.5	12.5	12.5
2.8	2.8	2.8	2.8	2.8
1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC
12 DC - 10 mA	12 DC - 10 mA	12 DC - 10 mA	12 DC - 10 mA	12 DC - 10 mA
250 V AC - 1A	250 V AC - 1A	250 V AC - 1A	250 V AC - 1A	250 V AC - 1A
1.5	1.5	1.5	1.5	1.5
-40 to +80	-40 to +80	-40 to +80	-40 to +80	-40 to +80
5000	5000	5000	5000	5000
IP 20	IP 20	IP 20	IP 20	IP 20
V-0	V0	V0	V-0	V-0
88 x 71.2 x 76.7	88 x 71.2 x 65.3	88 x 71.2 x 65.3		88 x 71.2 x 76.7
3.46 x 2.8 x 3.02	3.46 x 2.8 x 2.57	3.46 x 2.8 x 2.57		3.46 x 2.8 x 3.02
95.8 x 71.2 x 76.7	95.8 x 71.2 x 65.3	95.8 x 71.2 x 65.3	95.8 x 71.2 x 76.7	95.8 x 71.2 x 76.7
3.77 x 2.8 x 3.02	3.77 x 2.8 x 2.57	3.77 x 2.8 x 2.57	3.77 x 2.8 x 3.02	3.77 x 2.8 x 3.02
OVR T2 80-275s C QS 2CTB815708R2600	OVR T2 40-350 C QS 2CTB803886R1000	OVR T2 40-440 C QS 2CTB803876R0400	OVR T2 40-440s C QS 2CTB815704R5500	OVR T2 80-440s C QS 2CTB815708R5500
OVR T2 N 80-275s C QS 2CTB815708R2800	OVR T2 N 80-350 C QS 2CTB803886R0000	OVR T2-T3 N 80-440 C QS 2CTB803886R0100	OVR T2 N 80-440s C QS 2CTB815708R5700	OVR T2 N 80-440s C QS 2CTB815708R5700

Protection and safety

OVR Type 2 pluggable QuickSafe® surge protective devices TNS/TT 230 and 400 V 3Ph+N networks

OVR T2 3N 40-275 P QS

Type 2 surge protective devices are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (Up). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Type 2 pluggable

Protected lines	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
3+1	40	20	1.5	230/400	275	519.931	OVR T2 3N 40-275 P QS	2CTB803973R1100	0.48
3+1	40	20	1.5	230/400	275	519.948	OVR T2 3N 40-275 P TS QS	2CTB803973R0500	0.48
3+1	40	20	1.4	230/400	275	52526 0	OVR T2 3N 40-275s P TS QS	2CTB815704R0800	0.60
3+1	40	20	1.4	230/400	275	52532 1	OVR T2 3N 40-275s P QS	2CTB815704R2000	0.60
3+1	80	20	1.4	230/400	275	52544 4	OVR T2 3N 80-275s P TS QS	2CTB815708R0800	0.60
3+1	80	20	1.4	230/400	275	52550 5	OVR T2 3N 80-275s P QS	2CTB815708R2000	0.60
3+1	40	20	1.5	230/400	350	519.962	OVR T2 3N 40-350 P QS	2CTB803983R1100	0.48
3+1	40	20	1.5	230/400	350	519.979	OVR T2 3N 40-350 P TS QS	2CTB803983R0500	0.48
3+1	40	20	1.8	400/690	440	519.993	OVR T2 3N 40-440 P QS	2CTB803973R1400	0.48
3+1	40	20	1.8	400/690	440	520.005	OVR T2 3N 40-440 P TS QS	2CTB803973R1500	0.48
3+1	40	20	1.8	400/690	440	52537 6	OVR T2 3N 40-440s P TS QS	2CTB815704R3700	1.05
3+1	80	20	1.8	400/690	440	52558 1	OVR T2 3N 80-440s P TS QS	2CTB815708R3700	1.05
3+1	80	20	1.8	400/690	440	52562 8	OVR T2 3N 80-440s P QS	2CTB815708R4900	1.05

Notes

Protection and safety

OVR Type T2-T3 pluggable QuickSafe® surge protective devices
Single pole - 230 V and 440 V networks

Technical features

Types			**OVR T2-T3 20-275 P QS**	**OVR T2-T3 20-440 P QS**	**OVR T2-T3 N 80-275 P QS**	**OVR T2-T3 N 80-440 P QS**
with auxiliary contact (TS)			**OVR T2-T3 20-275 P TS QS**	**OVR T2-T3 20-440 P TS QS**	-	-
Technology			Varistor	Varistor	GDT	GDT
Electrical features						
Standard			IEC 61643-11/ EN 61643-11:2012/ A11:2018	IEC 61643-11/ EN 61643-11:2012/ A11:2018	IEC 61643-11/ EN 61643-11:2012/ A11:2018	IEC 61643-11/ EN 61643-11:2012/ A11:2018
Type/test class			T2-T3/II-III	T2-T3/II-III	T2-T3/II-III	T2-T3/II-III
Protected lines			1	1	1	1
System network			TNC - TT(L-N) - TNS	TNC - TT(L-N) - TNS	TT (N-PE)-TNS(N-PE)	TT (N-PE)-TNS(N-PE)
Type of current			AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 20%	± 10%	± 20%	± 10%
Nominal system voltage Un		[V]	230	400	230	400
Max. cont. operating voltage Uc		[V]	275	440	275	440
Nominal dc voltage Un dc L-PE		[V dc]	320	320	-	-
Max. dc. cont. operating voltage Ucdc L-PE		[V dc]	355	355	-	-
Maximum discharge current Imax (8/20)		[kA]	20	20	80	80
Nominal discharge current In (8/20)		[kA]	5	5	30	30
Voltage protection level Up at In (L-N)		[kV]	0.9/-/-	1.4/-/-	2	2
Voltage protection level Ures at 3kA (L-N)		[kV]	0.8	1.25	-/-/1.4	-/-/1.4
Voltage protection level Ures at 5kA (L-N)		[kV]	0.85	1.35	-	-
Voltage protection level Ures at 10kA (L-N)		[kV]	1	1.55	-	-
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	337/-	581/-	-	-
Uoc		[kV]	6	6	-	-
Response time		[ns]	≤ 25	≤ 25	-/1200	-/1200
Short-circuit withstand capability Isccr		[kA]	100	100	<25	<25
Backup protection maximum rating	fuse (gG)	[A]	≤ 125	≤ 125	<125	<125
	circuit breaker (B or C curve)	[A]	≤ 125	≤ 125	<125	<125
Pluggable cartridge			Yes	Yes	Yes	Yes
Integrated QuickSafe® technology			Yes	Yes	-	-
State indicator			Yes	Yes	No	No
Safety reserve			No	No	No	No
Auxiliary contact			Yes (TS option)	Yes (TS option)	No	No
Installation						
Wire range (L, N, PE)	solid wire	[mm²]	2.5 ... 35	2.5 ... 35	2.5 ... 35	2.5 ... 35
	stranded wire	[mm²]	2.5 ... 25	2.5 ... 25	2.5 ... 25	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5	12.5	12.5	12.5
Tightening torque (L, N, PE)		[Nm]	2.8	2.8	2.8	2.8
Auxiliary contact (TS)						
Contacts information			1 NO - 1 NC	1 NO - 1 NC	-	-
Min. load			12 DC - 10 mA	12 DC - 10 mA	-	-
Max. load			250 V AC - 1A	250 V AC - 1A	-	-
Connection cross-section		[mm²]	1.5	1.5	-	-
Miscellanous characteristics						
Stocking and operating temperature		[°C]	-40 to +80	-40 to +80	-40 to + 80	-40 to + 80
Maximal Altitude		[m]	5000	5000	5000	5000
Degree of protection			IP 20	IP 20	IP 20 - Indoor	IP 20 - Indoor
Fire resistance according to UL 94			V0	V0	V-0	V-0
Dimensions of packing						

Protection and safety

OVR Type T2-T3 pluggable QuickSafe® surge protective devices
Single pole - 230 V and 440 V networks

Technical features

Types		OVR T2-T3 20-275 P QS	OVR T2-T3 20-440 P QS	OVR T2-T3 N 80-275 P QS	OVR T2-T3 N 80-440 P QS
with auxiliary contact (TS)		**OVR T2-T3 20-275 P TS QS**	**OVR T2-T3 20-440 P TS QS**	**-**	**-**
height x width x depth	[mm]	88 x 17.8 x 65.3	88 x 17.8 x 65.3	85 x 17.8 x 64.8	85 x 17.8 x 64.8
	[inches]	3.46 x 0.7 x 2.57	3.46 x 0.7 x 2.57	3.35 x 0.70 x 2.55	3.35 x 0.70 x 2.55
With Auxiliary Contact (TS)					
height x width x depth	[mm]	95.8 x 17.8 x 65.3	95.8 x 17.8 x 65.3	-	-
	[inches]	3.77 x 0.7 x 2.57	3.77 x 0.7 x 2.57	-	-
Replacement Cartridges					
Phase Product ID		OVR T2-T3 20-275 C QS 2CTB803876R1200	OVR T2-T3 20-440 C QS 2CTB803876R0600	OVR T2-T3 N 80-275 C QS 2CTB803876R0000	OVR T2-T3 N 80-275 C QS 2CTB803876R0000
Neutral Product ID		-	-	-	-

OVR T2 T3 20- 275 P QS

Type 2 and 3 surge protective devices shall be installed as close as possible to the sensitive equipment to protect. As Type 2 they have been characterize by their capacity to safely discharge current with a 8/20 µs wave form and they guarantee the coordination with Type 1 SPDs or other Type 2 respecting coordination distances. As Type 3 they are characterized by their capacity to safely discharge current with 1.2/50 µs wave form, with a very low level of Voltage Protection level.

Poles	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
1	20	5	0.9	230	275	519.566	OVR T2-T3 20-275 P QS	2CTB803871R2400	0.12
1	20	5	0.9	230	275	519.573	OVR T2-T3 20-275 P TS QS	2CTB803871R2500	0.12
1	20	5	1.4	400	440	519.603	OVR T2-T3 20-440 P QS	2CTB803871R1100	0.12
1	20	5	1.4	400	440	519.610	OVR T2-T3 20-440 P TS QS	2CTB803871R1300	0.12
1	80	30	1.4	230	275	519641	OVR T2-T3 N 80-275 P QS	2CTB803973R1900	0.12
1	80	30	1.4	400	440	519641	OVR T2-T3 N 80-440 P QS	2CTB803973R2000	0.12

Protection and safety

OVR Type T2-T3 pluggable QuickSafe® surge protective devices
TNC - 230 V 3Ph + N networks

Technical features

Types			**OVR T2-T3 3L 20-275 P QS**
with auxiliary contact (TS)			**OVR T2-T3 3L 20-275 P TS QS**
Technology			Varistor
Electrical features			
Standard			IEC 61643-11/EN 61643-11:2012/A11:2018
Type/test class			T2-T3/II-III
Protected lines			3
System network			TNC
Type of current			AC 47-63 Hz
Voltage regulation of the system network			± 20%
Nominal system voltage Un (L-PE/L-L)		[V]	230/400
Max. cont. operating voltage Uc (L-PE/L-L)		[V]	275/440
Nominal dc voltage Un dc L-PE		[V dc]	320
Max. dc. cont. operating voltage Ucdc L-PE		[V dc]	355
Maximum discharge current Imax (8/20)		[kA]	20
Nominal discharge current In (8/20)		[kA]	5
Total Current		[kA]	60
Voltage protection level Up at In (L-N/N-PE /L-PE)		[kV]	0,85/-/-
Voltage protection level Ures at 3kA		[kV]	0.8
Voltage protection level Ures at 5kA		[kV]	0.85
Voltage protection level Ures at 10kA		[kV]	1.0
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	337/-
Uoc		[kV]	6
Response time		[ns]	≤ 25
Short-circuit withstand capability Isccr		[kA]	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 125
	circuit breaker (B or C curve)	[A]	≤ 125
Pluggable cartridge			Yes
Integrated QuickSafe® technology			Yes
State indicator			Yes
Safety reserve			No
Auxiliary contact			Yes (TS option)
Installation			
Wire range (L, N, PE)	solid wire	[mm²]	2.5 ... 35
	stranded wire	[mm²]	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5
Tightening torque (L, N, PE)		[Nm]	2.8
Auxiliary contact (TS)			
Contacts information			1 NO - 1 NC
Min. load			12 DC - 10 mA
Max. load			250 V AC - 1A
Connection cross-section		[mm²]	1.5
Miscellanous characteristics			
Stocking and operating temperature		[°C]	-40 to +80
Maximal Altitude		[m]	5000
Degree of protection			IP 20
Fire resistance according to UL 94			V0
Dimensions			
height x width x depth		mm	88 x 53.4 x 65.3
		inches	3.46 x 2.1 x 2.57

Protection and safety

OVR Type T2-T3 pluggable QuickSafe® surge protective devices
TNC - 230 V 3Ph + N networks

Technical features

Types		**OVR T2-T3 3L 20-275 P QS**
with auxiliary contact (TS)		**OVR T2-T3 3L 20-275 P TS QS**
With Auxiliary Contact (TS)		
height x width x depth	mm	95.8 x 53.4 x 65.3
	inches	3.77 x 2.1 x 2.57
Replacement Cartridges		
Phase Product ID		OVR T2-T3 20-275 C QS 2CTB803876R1200
Neutral Product ID		-

OVR T2 T3 3L 20-275 P TS QS

Type 2 and 3 surge protective devices shall be installed as close as possible to the sensitive equipment to protect. As Type 2 they have been characterize by their capacity to safely discharge current with a 8/20 µs wave form and they guarantee the coordination with Type 1 SPDs or other Type 2 respecting coordination distances. As Type 3 they are characterized by their capacity to safely discharge current with 1.2/50 µs wave form, with a very low level of Voltage Protection level.

Poles	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
3	20	5	0.85	230/400	275	519818	OVR T2-T3 3L 20-275 P QS	2CTB803873R3400	0.36
3	20	5	0.85	230	275	520661	OVR T2-T3 3L 20-275 P TS QS	2CTB803873R3500	0.36

Protection and safety

OVR Type T2-T3 QuickSafe® surge protective devices TNS/TT - 230 V 1Ph+N networks

Technical features

Types			**OVR T2-T3 1N 20-275 P QS**
with auxiliary contact (TS)			**OVR T2-T3 1N 20-275 P TS QS**
Technology			Varistor + GDT
Electrical features			
Standard			IEC 61643-11/EN 61643-11:2012/A11:2018
Type/test class			T2-T3/II-III
Protected lines			1+1
System network			TT - TNS
Type of current			AC 47-63 Hz
Voltage regulation of the system network			± 20%
Nominal system voltage Un		[V]	230
Max. cont. operating voltage Uc		[V]	275
Maximum discharge current Imax (8/20)		[kA]	20
Nominal discharge current In (8/20)		[kA]	5
Total Current		[kA]	40
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	0.9/1.4/1.4
Voltage protection level Ures at 3kA (L-N/N-PE /L-PE)		[kV]	0.8/1.4/0.85
Voltage protection level Ures at 5kA(L-N/N-PE /L-PE)		[kV]	0.85/1.4/0.95
Voltage protection level Ures at 10kA (L-N/N-PE /L-PE)		[kV]	1/1.4/1.15
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./N-PE: 200ms)		[V]	337/1200
Uoc		[kV]	6
Response time		[ns]	≤ 25
Residual current IPE		[µA]	≤ 10
Short-circuit withstand capability Isccr		[kA]	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 125
	circuit breaker (B or C curve)	[A]	≤ 125
Pluggable cartridge			Yes
Integrated QuickSafe® technology			Yes
State indicator			Yes
Safety reserve			No
Auxiliary contact			Yes (TS option)
Installation			
Wire range (L, N, PE)	solid wire	[mm²]	2.5 ... 35
	stranded wire	[mm²]	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5
Tightening torque (L, N, PE)		[Nm]	2.8
Auxiliary contact (TS)			
Contacts information			1 NO - 1 NC
Min. load			12 DC - 10 mA
Max. load			250 V AC - 1A
Connection cross-section		[mm²]	1.5
Miscellanous characteristics			
Stocking and operating temperature		[°C]	-40 to +80
Maximal Altitude		[m]	5000
Degree of protection			IP 20
Fire resistance according to UL 94			V0

Protection and safety

OVR Type T2-T3 QuickSafe® surge protective devices
TNS/TT - 230 V 1Ph+N networks

Technical features

Types		**OVR T2-T3 1N 20-275 P QS**
with auxiliary contact (TS)		**OVR T2-T3 1N 20-275 P TS QS**
Dimensions		
height x width x depth	[mm]	88 x 35.6 x 65.3
	[inches]	3.46 x 1.4 x 2.57
With Auxiliary Contact (TS)		
height x width x depth	mm	95.8 x 35.6 x 65.3
	inches	3.77 x 1.4 x 2.57
Replacement Cartridges		
Phase Product ID		OVR T2-T3 20-275 C QS 2CTB803876R1200
Neutral Product ID		OVR T2-T3 N 80-275 C QS 2CTB803876R0000

OVR T2 T3 1N 20-275 P QS

Type 2 and 3 surge protective devices shall be installed as close as possible to the sensitive equipment to protect. As Type 2 they have been characterize by their capacity to safely discharge current with a 8/20 µs wave form and they guarantee the coordination with Type 1 SPDs or other Type 2 respecting coordination distances. As Type 3 they are characterized by their capacity to safely discharge current with 1.2/50 µs wave form, with a very low level of Voltage Protection level.

Poles	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
1+1	20	5	1.4	230	275	519689	OVR T2-T3 1N 20-275 P QS	2CTB803972R1200	0.24
1+1	20	5	1.4	230	275	520654	OVR T2-T3 1N 20-275 P TS QS	2CTB803972R1300	0.24

Protection and safety

OVR Type T2-T3 QuickSafe® surge protective devices
TT - 230 V and 400 V 3Ph+N networks

Technical features

Types			**OVR T2-T3 3N 20-275 P QS**	**OVR T2-T3 3N 20-440 P QS**
with auxiliary contact (TS)			**OVR T2-T3 3N 20-275 P TS QS**	
Technology			Varistor + GDT	Varistor + GDT
Electrical features				
Standard			IEC 61643-11/EN 61643-11:2012/ A11:2018	IEC 61643-11 /EN 61643-11:2012/ A11:2018
Type/test class			T2-T3/II-III	T2-T3 /II-III
Protected lines			3+1	3+1
System network			TT - TNS	TT - TNS
Type of current			AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			± 20%	± 10%
Nominal system voltage Un (L-N/L-L)		[V]	230/400	400/690
Max. cont. operating voltage Uc (L-N/L-L)		[V]	275/440	440/750
Maximum discharge current Imax (8/20)		[kA]	20	20
Nominal discharge current In (8/20)		[kA]	5	5
Total Current		[kA]	80	80
Voltage protection level Up at In (L-N/N-PE/L-PE)		[kV]	0.9/1.4/1.4	1.4/1.4/1.4
Voltage protection level Ures at 3kA (L-N/N-PE /L-PE)		[kV]	0.8/1.4/0.85	1.25/1.4/1.4
Voltage protection level Ures at 5kA (L-N/N-PE /L-PE)		[kV]	0.85/1.4/0.95	1.35/1.4/1.45
Voltage protection level Ures at 10kA (L-N/N-PE /L-PE)		[kV]	1/1.4/1.15	1.35/1.4/1.65
TOV (Temporary overvoltage) withstand Ut (L-N: 5s./ N-PE: 200ms)		[V]	337/1200	581/1200
Uoc		[kV]	6	6
Response time		[ns]	≤ 25	≤ 25
Residual current IPE		[µA]	≤ 10	≤ 10
Short-circuit withstand capability Isccr		[kA]	100	100
Backup protection maximum rating	fuse (gG)	[A]	≤ 125	≤ 125
	circuit breaker (B or C curve)	[A]	≤ 125	≤ 125
Pluggable cartridge			Yes	Yes
Integrated QuickSafe® technology			Yes	Yes
State indicator			Yes	Yes
Safety reserve			No	No
Auxiliary contact			Yes (TS option)	Yes (TS option)
Installation				
Wire range (L, N, PE)	solid wire	[mm²]	2.5 ... 35	2.5 ... 35
	stranded wire	[mm²]	2.5 ... 25	2.5 ... 25
Stripping length (L, N, PE)		[mm]	12.5	12,5
Tightening torque (L, N, PE)		[Nm]	2.8	2,8
Auxiliary contact (TS)				
Contacts information			1 NO- 1 NC	1 NO- 1 NC
Min. load			12 DC - 10 mA	12 DC - 10 mA
Max. load			250 V AC - 1A	250 V AC - 1A
Connection cross-section		[mm²]	1.5	1.5
Miscellanous characteristics				
Stocking and operating temperature		[°C]	-40 to +80	-40 to +80
Maximal Altitude		[m]	5000	5000
Degree of protection			IP 20	IP 20

Protection and safety

OVR Type T2-T3 QuickSafe® surge protective devices
TT - 230 V and 400 V 3Ph+N networks

Technical features

Types		OVR T2-T3 3N 20-275 P QS	OVR T2-T3 3N 20-440 P QS
with auxiliary contact (TS)		**OVR T2-T3 3N 20-275 P TS QS**	
Fire resistance according to UL 94		V0	V0
Dimensions			
height x width x depth	mm	88 x 71.2 x 65.3	88 x 71.2 x 65.3
	inches	3.46 x 2.8 x 2.57	3.46 x 2.8 x 2.57
With Auxiliary Contact (TS)			
height x width x depth	mm	95.8 x 71.2 x 65.3	96 x 71.2 x 64.8
	inches	3.77 x 2.8 x 2.57	3.35 x 2.81 x 2.55
Replacement Cartridges			
Phase Product ID		OVR T2-T3 20-275 C QS 2CTB803876R1200	OVR T2-T3 20-440 C QS 2CTB803876R0600
Neutral Product ID		OVR T2-T3 N 80-275 C QS 2CTB803876R0000	OVR T2-T3 N 80-440 C QS 2CTB803886R0100

OVR T2 T3 3N 20-275 P TS QS

Type 2 and 3 surge protective devices shall be installed as close as possible to the sensitive equipment to protect. As Type 2 they have been characterize by their capacity to safely discharge current with a 8/20 µs wave form and they guarantee the coordination with Type 1 SPDs or other Type 2 respecting coordination distances. As Type 3 they are characterized by their capacity to safely discharge current with 1.2/50 µs wave form, with a very low level of Voltage Protection level.

Poles	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection level Up	Nominal voltage Un	Max. cont. operating voltage Uc	Bbn 3660308	Order details		Weight 1 piece
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
3+1	20	5	1.4	230/400	275	519924	OVR T2-T3 3N 20-275 P QS	2CTB803973R1200	0.48
3+1	20	5	1.4	230/400	275	520692	OVR T2-T3 3N 20-275 P TS QS	2CTB803973R1600	0.48
3+1	20	5	1.5	400/690	440	519986	OVR T2-T3 3N 20-440 P QS	2CTB803973R1300	0.48

Protection and safety

OVR PV surge protective devices Photovoltaic networks

Technical features

Types			**OVR PV T2 40-1000 P**	**OVR PV T2 40-1500 P**
with auxiliary contact (TS)			**OVR PV T2 40-1000 P TS**	**OVR PV T2 40-1500 P TS**
Technology			Varistor	Varistor
Electrical features				
Standard			IEC 61643-31 UL 1449 5th Ed	IEC 61643-31 UL 1449 5th Ed
Type/test class			T2/II (EN) & Type 1 CA (UL)	T2/II (EN) & Type 1 CA (UL)
Protected lines			2	2
Types of networks			Photovoltaic	Photovoltaic
Type of current			DC	DC
Nominal voltage Un (L-N/L-L)		[V]	1000	1500
Max. cont. operating voltage Ucpv		[V]	1000	1500
Max.cont.operating voltage according Ⓤ (MCOV)		[V]	1000	1500
Maximum discharge current Imax (8/20)		[kA]	40	40
Nominal discharge current In (8/20)		[kA]	20	15
Voltage protection level Up at In (L-L/L-PE)		[kV]	4	5
Voltage protection rating according Ⓤ (VPR (L+/G, L-/G, L+/L-))		[kV]	3	4
Response time		[ns]	≤ 25	≤ 25
Residual current IPE		[µA]	≤1000	≤1000
Short-circuit DC current Iscpv		[A]	10,000	10,000
Short circuit withstand according Ⓤ (S_{CCR})		[kA]	10	10
Disconnector	Fuse		no need up to 10 kA	no need up to 10 kA
	Circuit breaker		no need up to 10 kA	no need up to 10 kA
Pluggable cartridge			Yes	Yes
Integrated specific thermal disconnector			Yes	Yes
State indicator			Yes	Yes
Safety reserve			No	No
Auxiliary contact			Yes (TS option)	Yes (TS option)
Installation				
Wire range (L, N, PE)	Solid wire	[mm²]	2.5...35	2.5...35
	Stranded wire	[mm²]	2.5...25	2.5...25
Stripping length (L, N, PE)			12	12
Tightening torque (L, N, PE)		NM	4	4
Auxiliary contact (TS)				
Contact complement			1 NO - 1 NC	1 NO - 1 NC
Minimum load			12 V DC - 10 mA	12 DC - 10 mA
Maximum load			250 V AC - 1 A	250 V AC - 1A
Connection cross-section			1.5	1.5
Miscellaneous characteristics				
Stocking and operating temperature		[°C]	-40 to +80	-40 to +80
Maximal Altitude		[m]	2000	2000
Humidity Rate HR			95% (non condensing)	95% (non condensing)
Degree of protection			IP20	IP 20
Fire resistance according to UL 94			V0	V0
Dimensions	height x width x depth	[mm]	90 x 54 x 73	90 x 54 x 73
		[inches]	3.5 x 2.12 x 2.87	3.5 x 2.12 x 2.87
with auxiliary contact (TS)	height x width x depth	[mm]	99 x 54 x 73	99 x 54 x 73
		[inches]	3.89 x 2.12 x 2.87	3.89 x 2.12 x 2.87
Replacement Cartridges				
Phase Product ID			OVR PV T2 40-1000 C 2CTB802402R1000	OVR PV T2 40-1500 C 2CTB802402R1500

Technical features

Types			**OVR PV T1-T2 5-1000 P QS**	**OVR PV T1-T2 12.5-1000 P QS**	**OVR PV T1-T2 5-1500 P QS**	**OVR PV T1-T2 10-1500 P QS**
With auxiliary contact (TS)			**OVR PV T1-T2 5-1000 P TS QS**	**OVR PV T1-T2 12.5-1000 P TS QS**	**OVR PV T1-T2 5-1500 P TS QS**	**OVR PV T1-T2 10-1500 P TS QS**
Technology			Varistor	Varistor	Varistor	Varistor
Electrical features						
Standard			IEC61643-11/ IEC 61643-31	IEC61643-11/ IEC 61643-31/ UL 1449 5th Ed.	IEC61643-11/ IEC 61643-31/	IEC61643-11/ IEC 61643-31/ UL 1449 5th Ed.
Type/test class			T1-T2/I-II	T1-T2/I-II	T1-T2/I-II	T1-T2/I-II
Protected lines			2	2	2	2
Types of networks			Photovoltaic	Photovoltaic	Photovoltaic	Photovoltaic
Type of current			DC	DC	DC	DC
Nominal Voltage Un (L-N)/L-L)		[V]	1000	1000	1500	1500
Max. cont. Operating voltage Ucpv		[V]	1100	1100	1500	1500
Max.cont.operating voltage accroding Ⓤℓ (MCOV)			-	1100	-	1500
Impulse current Iimp (10/350)		[kA]	5	6.26	5	5
Total discharge current Itotal (10/350)		[kA]	5	12.5	5	10
Maximum discharge current Imax (8/20)		[kA]	40	40	30	30
Nominal discharge current In (8/20)		[kA]	20	20	20	20
Voltage protection level Up at In (L-L/L-N)		[kV]	3,8	3.8	5	5
Voltage protection rating according UL (VPR (L+/G, L-/G, L+/L-))		[kV]	-	2.5/2.5/2.5	-	4/4/4
Response time		[ns]	<25	<25	<25	<25
Short circuit DC current Iscpv		[A]	11	11	11	11
Short circuit withstand according Ⓤℓ (S_{CCR})		[kA]	-	50	-	65
Disconnector	Fuse		no need up to 11 kA	no need up to 11 kA	no need up to 11 kA	no need up to 11 kA
	Circuit breaker		no need up to 11 kA	no need up to 11 kA	no need up to 11 kA	no need up to 11 kA
Pluggable cartridge			Yes	Yes	Yes	Yes
Integrated specific thermal disconnector			Yes	Yes	Yes	Yes
State indicator			Yes	Yes	Yes	Yes
Safety Reserve			No	No	No	No
Auxiliary contact			Yes (TS option)	Yes (TS option)	Yes (TS option)	Yes (TS option)
Installation						
Wire range	Solid wire	[mm²]	2.5....35	2.5....35	2.5....35	2.5....35
(L, N, PE)	Stranded wire	[mm²]	2.5...25	2.5...25	2.5...25	2.5...25
Stripping length (L,N,PE)		[mm²]	12.5	12.5	12.5	12.5
Tightening torque (L, N, PE)		[N.m]	4.5	4.5	4.5	4.5
Auxiliary contact (TS)						
Contact complement			1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC	1 NO - 1 NC
Minimum load			12 V DC - 0,5 mA	12 V DC - 0,5 mA	12 V DC - 0,5 mA	12 V DC - 0,5 mA
Maximum load			250 V AC - 1 A	250 V AC - 1 A	250 V AC - 1 A	250 V AC - 1 A
Connection cross-section			1.5	1.5	1.5	1.5
Miscellaneous characteristics						
Stocking and operating temperature		[°C]	-40 to +85	-40 to +85	-40 to +85	-40 to +85
Maximal Altitude		[m]	4000	4000	4000	4000
Humidity Rate HR			95%	95%	95%	95%
Degree of protection			IP 20	IP 20	IP 20	IP 20
Fire resistance according to UL 94			V0	V0	V0	V0
Dimensions	height x width	[mm]	95 x 54 x 86	95 x 54 x 86	95 x 54 x 86	95 x 54 x 86
	depth	[inches]	3.74 x 2.12 x 3.38	3.74 x 2.12 x 3.38	3.74 x 2.12 x 3.38	3.74 x 2.12 x 3.38
With auxiliary contact (TS)	height x width	[mm]	110 x 54 x 86	110 x 54 x 86	110 x 54 x 86	110 x 54 x 86
	depth	[inches]	4.33 x 2.12 x 3.38	4.33 x 2.12 x 3.38	4.33 x 2.12 x 3.38	4.33 x 2.12 x 3.38
Replacement cartridges						
Phase Product ID			OVR PV T1-T2 5-1000 C QS 2CTB812052R1000	OVR PV T1-T2 12.5-1000 C QS 2CTB812122R1000	OVR PV T1-T2 5-1500 C QS 2CTB812052R1500	OVR PV T1-T2 10-1500 C QS 2CTB812102R1500
			-	OVR PV T1-T2 12.5-1000 M C QS 2CTB812122R1001	-	OVR PV T1-T2 10-1500 M C QS 2CTB812102R1501

Protection and safety

OVR PV surge protective devices Photovoltaic networks

Combined Type 1 and Type 2 SPD can guarantee an over voltage reduction to protect end equipment, whether the surge comes from a lightning strike or power grid perturbation. This is due to both its functions as Type 1 able to withstand 10/350µs waveform, the strong and powerful one, as well as Type 2 for 8/20µs waveform, to limit the voltage rise.
ABB is set to cover the main needs of large-scale PV power plants: keeping the Solar production running, whatever the atmospheric discharge. This being from 600 V DC up to 1500 V DC.

Type T1-T2 and T2 PV

Protected lines	Impulse current Iimp 10/350	Total disch. current Itotal 10/350	Max. dischar. current Imax 8/20	Nominal current In	Voltage protection level Up	Max. cont. operating voltage Ucpv	Bbn 4053546	Order details		Weight 1 piece
	kA	kA	kA	kA	kV	V	EAN	Type code	Order code	kg
1+1 DC	5	5	40	20	3.8/3.8	1100	034615	OVR PV T1-T2 5-1000 P QS	2CTB812050R1000	0.397
1+1 DC	5	5	40	20	3.8/3.8	1100	034639	OVR PV T1-T2 5-1000 P TS QS	2CTB812051R1000	0.406
1+1 DC	6,25	12.5	40	20	3.8/3.8	1100	034660	OVR PV T1-T2 12.5-1000 P QS	2CTB812120R1000	0.453
1+1 DC	6,25	12.5	40	20	3.8/3.8	1100	034677	OVR PV T1-T2 12.5-1000 P TS QS	2CTB812121R1000	0.462
1+1 DC	5	5	30	20	5/5	1500	034646	OVR PV T1-T2 5-1500 P QS	2CTB812050R1500	0.488
1+1 DC	5	5	30	20	5/5	1500	034653	OVR PV T1-T2 5-1500 P TS QS	2CTB812051R1500	0.497
1+1 DC	5	10	30	20	5/5	1500	034684	OVR PV T1-T2 10-1500 P QS	2CTB812100R1500	0.488
1+1 DC	5	10	30	20	5/5	1500	034691	OVR PV T1-T2 10-1500 P TS QS	2CTB812101R1500	0.497
1+1 DC	-	-	40	15	5/5	1500	050240	OVR PV T2 40-1500 P	2CTB802400R1500	0.3
1+1 DC	-	-	40	15	5/5	1500	050288	OVR PV T2 40-1500 P TS	2CTB802401R1500	0.395
1+1 DC	-	-	40	20	4/4	1000	050110	OVR PV T2 40-1000 P	2CTB802400R1000	0.3
1+1 DC	-	-	40	20	4/4	1000	050165	OVR PV T2 40-1000 P TS	2CTB802401R1000	0.395
1+1 DC	-	-	40	15	5/5	1500	050240	OVR PV T2 40-1500 P BULK (20)	2CTB802400Z1500	0.3
1+1 DC	-	-	40	15	5/5	1500	050288	OVR PV T2 40-1500 P TS BULK (20)	2CTB802401Z1500	0.395
1+1 DC	-	-	40	20	4/4	1000	050110	OVR PV T2 40-1000 P BULK (20)	2CTB802400Z1000	0.3
1+1 DC	-	-	40	20	4/4	1000	050165	OVR PV T2 40-1000 P BULK (20) TS	2CTB802401Z1000	0.395

OVR PV T1-T2-5-1000 P TS QS

OVR PV T1-T2-10-1500 P TS QS

OVR PV T2 40-1500 P TS

Digital SPDs—eOVR
Hardware's features

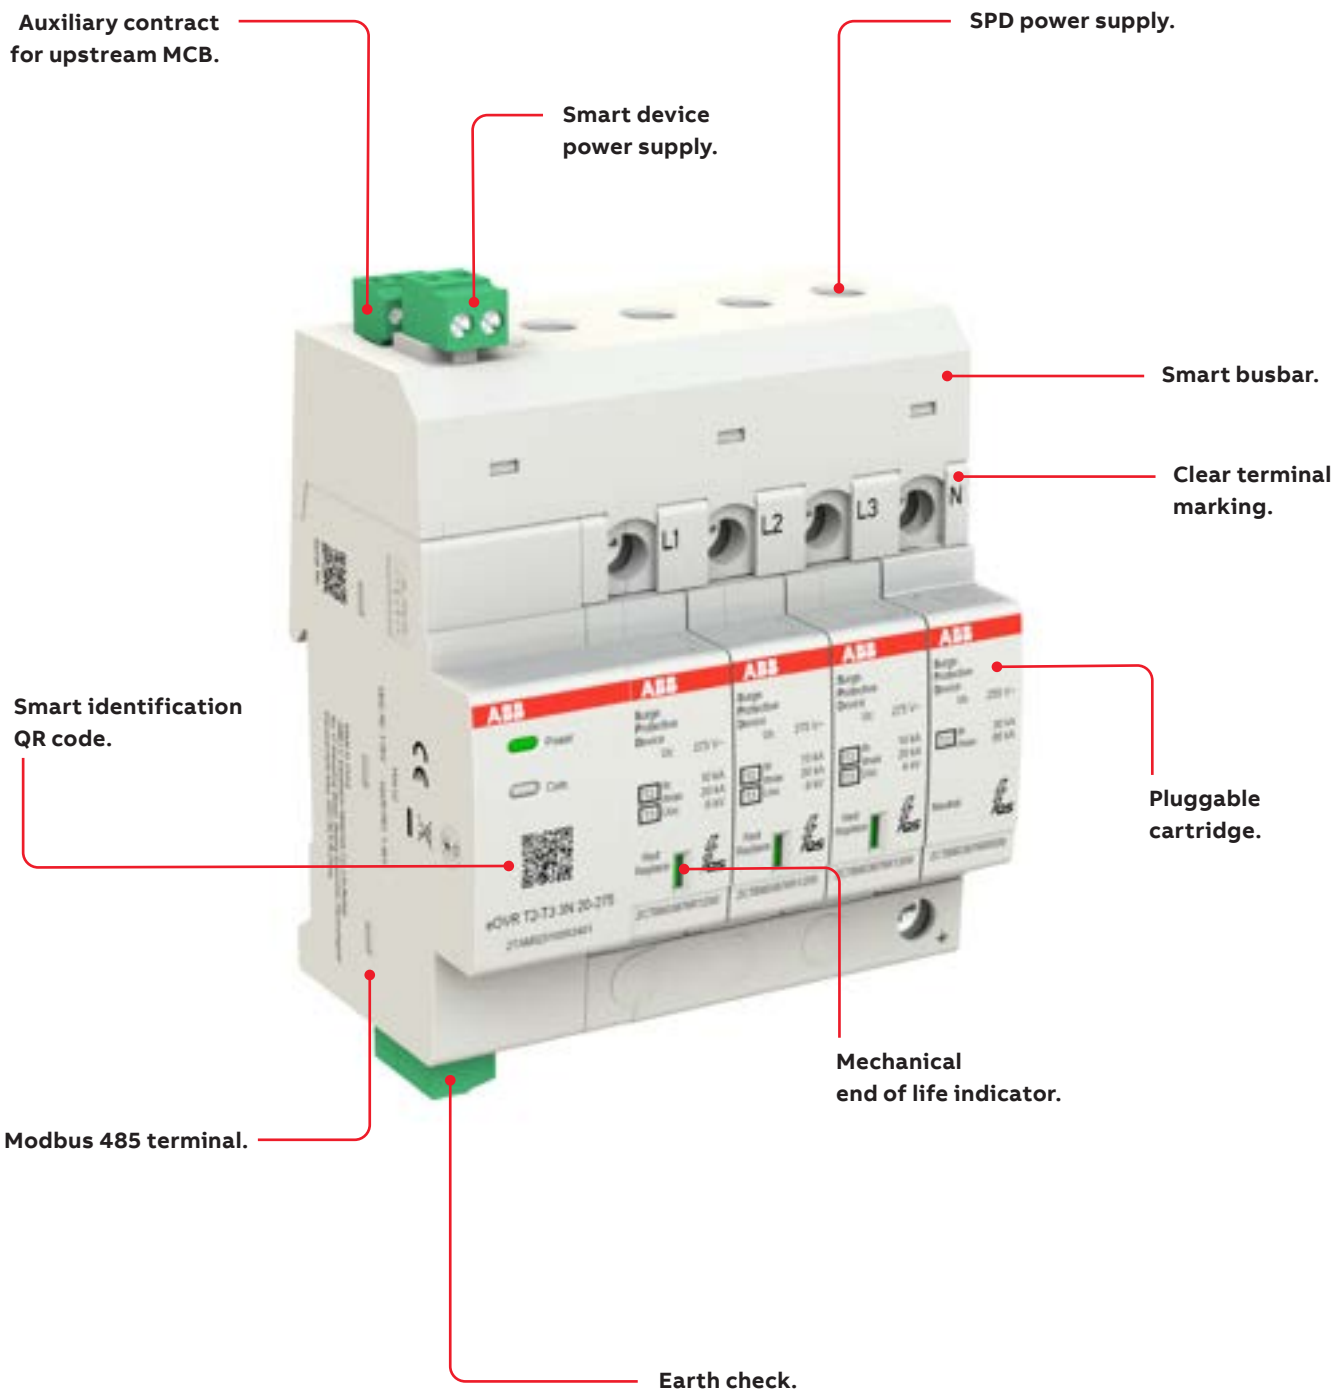

Digital SPDs—eOVR
Hardware's features

SPDs monitoring through integrated captors:
- **End of life in %**
- **MOV leakage current**
- **Surge counter**
- **Over/undervoltage**

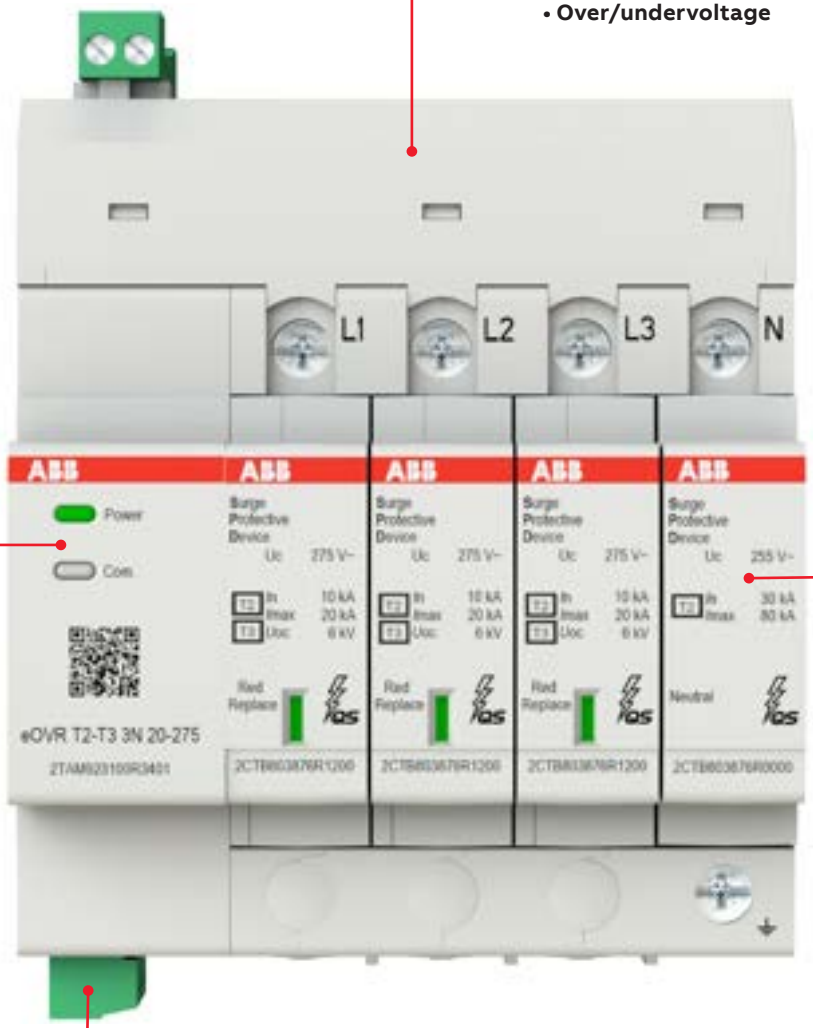

Surge protection:
- **T1-T2 : Iimp 12.5 kA**
- **T2 : Imax 40/80 kA**
- **T2-T3 : Imax 20 kA**

Communication via ModBus RS 485.

Earthing connection fault

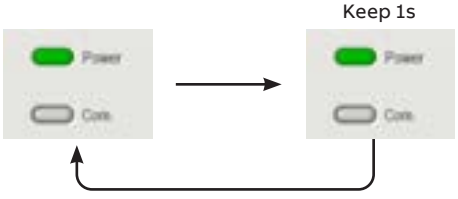

When there is problem of the ground connection, the light of power will be off 1s, then be on.
This cycle will be repeated to this fault is removed, then the light of power will be back to green.

MOV's end of life / SPD triggered / Black up protection failure

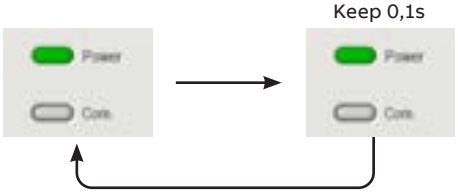

When such malfunction occur, the light of power will be off 0.1s, then be on.
This cycle will be repeated to this fault is removed, then the light of power will be back to green.

Digital SPDs—eOVR

SPDs go to Digital with ABB System Pro InSite

System Pro M InSite compatible
eOVR is compatible to ABB InSite UI and third party UI to monitor all eOVR features.
Digital benefits bring to eOVR new ways to extend SPDs end of life, alarms, notifications, cross data.

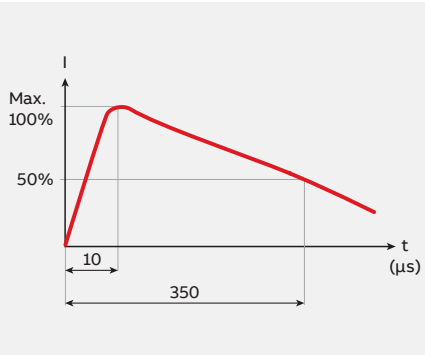

Surge protection level
Tested as Type 1, Type 2 or Type 3 the eOVR series is designed to face surge events either from atmospheric origin or network disturbances.

End of life state
Front end of life display, mechanically connected to the MOV to state its status, also when power off.
- Green: working
- Green/red : should be replace
- Red: must be replaced

Product identification
To easier the access to all eOVR product information (performance, certificates, troubleshooting…) a printed QR code is on the front face to reach the product webpage also when the product is already installed on the Din rail.

Pre-mounted
eOVR is the standard ABB OVR series SPDs factory fitted and tested to the Digital module. Saving time in mounting operations.

Replacement cartridge
The pluggable feature facilitates maintenance. Should one or more worn cartridges need to be replaced, the wires do not have to be removed.

Digital SPDs—eOVR

Software's features

SPDs protect your equipment from transient overvoltages and surges, but after they have coped with a certain amount of surges, their cartridges need to be replaced.

To ensure continuous operation and protection, the device status needs to be monitored remotely.
By connecting to System pro M compact® InSite, it is possible to retrieve the data from the SPD and feed it into the integrated widgets and alarm settings on the InSite web server. Based on the current data status, predictive maintenance can be achieved through end-of-life monitoring, surge event counting, surge amplitude, and leakage current. In addition, real-time data such as past surge event data, ambient temperature, over/under voltage, upstream MCB monitoring, and ground connection status can also be viewed via the web server.

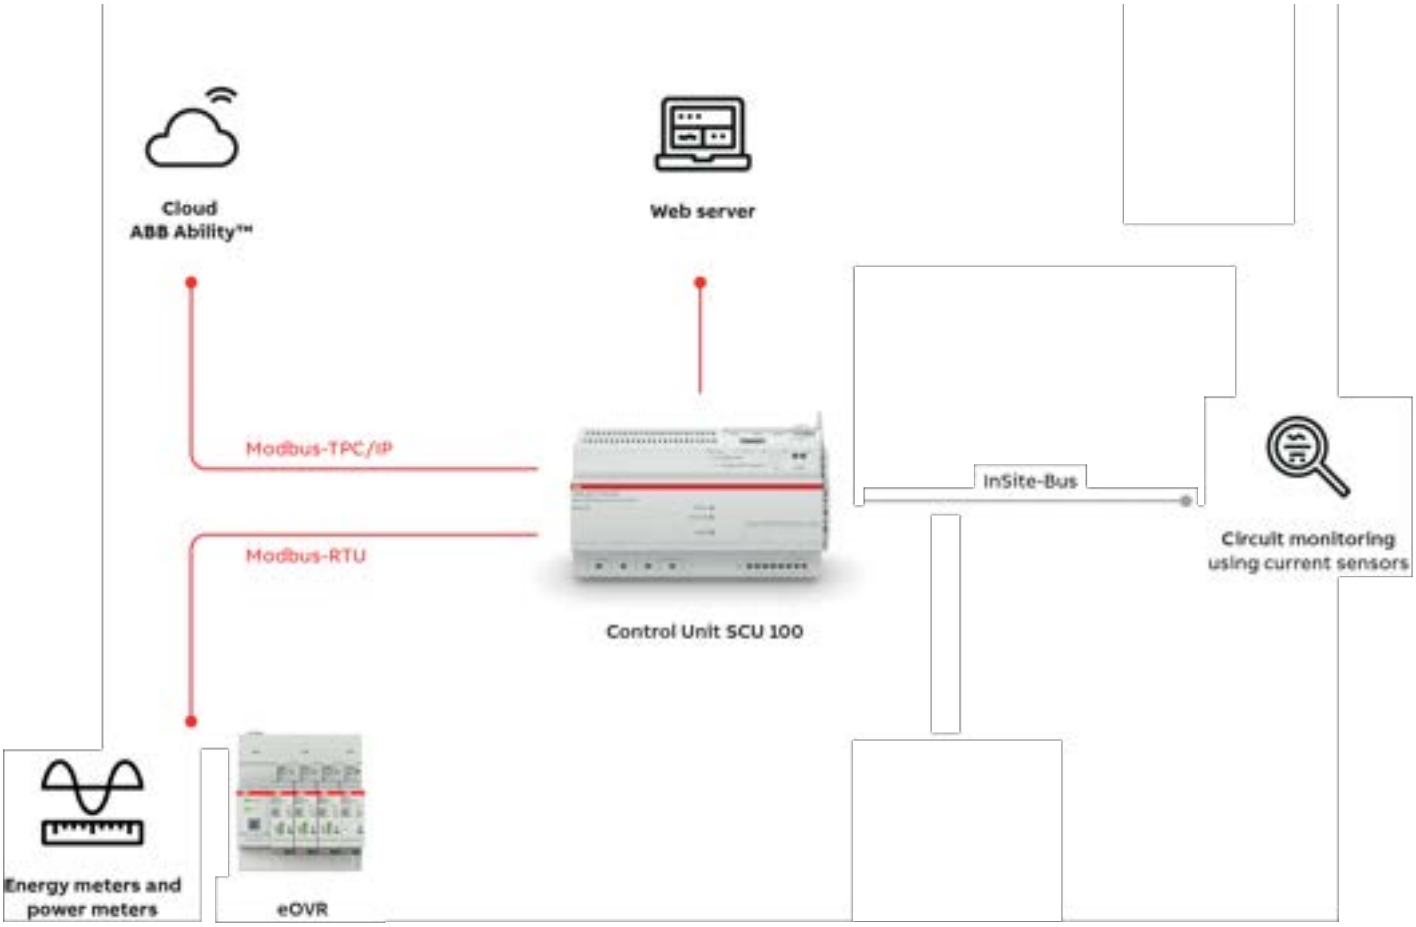

Digital SPDs—eOVR
Software's features

Surge monitoring.

End of life status in %
Based on the current leakage, an algorithm display individual end of life in % to easier the SPD status.

Surge event counter
eOVR is recording all surge events passing through him to let you know the number of events faced and when it happened.

Surge amplitude
Surge event recorded will indicate their surge level, this in the aim to check if the SPD need to be upgraded or explain its premature failing.

Current leakage
Measure the leakage current from each MOV that result from a degradation among event or time.



Earthing connection status
States if the eOVR is correctly connected to the ground.

Network monitoring.



Over/under voltage
Permanent overvoltage can damage the SPD. By recording this feature, it is possible to mitigate the impact by initiating appropriate actions.

Ambient temperature
Measuring the ambient temperature in the enclosure can prevent too high heating, leading to malfunction.

Upstream MCB monitoring
Monitor the upstream protection is switched ON or OFF. When Off, the eOVR will be not operating and will not be able to protect from surge anymore.

Digital SPDs—eOVR
Software's features

End-of-life prediction
eOVR measures the leakage current flowing through the Metal Oxide Varistor (MOV) in real time. With an algorithm based on laboratory tests, it evaluates the end of life status of each MOVs in %.

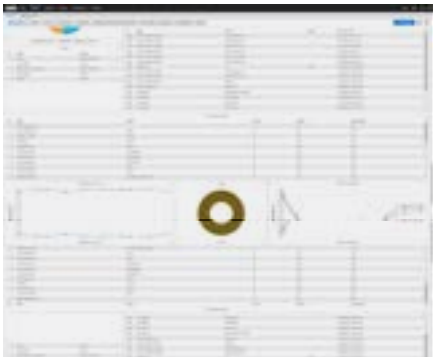

Suggested maintenance operation
Based on the status of the eOVR (end-of-life, temperature, network nominal voltages), preventive maintenance operations will be suggested with the aim to optimize the continuity of service by keeping the surge protection level at its maximum.

Maintenance report
It is possible to extract a maintenance report about the eOVR. Such a report supports planning the upcoming maintenance operations and allows to keep track of the status in a specific period of time.

Alarms/notifications
In the InSite web server it's possible to set alarms for a number of eOVR attributes to inform each time there is a change. This serves the purpose of anticipating and organizing predictive maintenance operations as much in advance as possible, in order to prolong the system's continuity of service.

Digital SPDs—eOVR

eOVR Type 1 - type 2

Function:
Surge protective devices SPD type 1- type 2, type 2 and type 2– type 3 protect low-voltage consumer sys-tems against lightning currents and surge voltages as they are tested as SPD type 1, type 2 and Type 2+3, according to IEC 61643-11. They are offering digital features through ABB Pro M InSite UI to monitor several features to enhance its protection level.

Application: Commercial, Building, Industrial.
Standard: IEC 61643-11; EN 61000-6-2/EN 61000-6-3

eOVR T1-T2 3N 12.5-275s

Protected lines	Impulse current	Max discharge current	Nominal current	Follow current interrupting ingrating Ifi	Voltage protection level	Nominal voltage	Max. cont. operating voltage	Order details	
	limp 10/350 kA	Imax 8/20 kA	In kA	Ifi kV	Up kV	Un V	Uc V	Type code	Order code
3+1	12.5	80	20	-	1.4	230/400	275	eOVR T1-T2 3N 12.5-275s	2TAM913100R5411
3+1	12.5	80	20	-	1.4	400/690	440	eOVR T1-T2 3N 12.5-440s	2TAM913100R5811
3	12.5	80	20	-	1.4	400/690	440	eOVR T1-T2 3L 12.5-440s	2TAM913000R5811
4	12.5	80	20	-	1.4	400/690	440	eOVR T1-T2 4L 12.5-440s	2TAM914000R5811

eOVR T2 3N 40-350

Protected lines	Impulse current	Max discharge current	Nominal current	Follow current interrupting ingrating Ifi	Voltage protection level	Nominal voltage	Max. cont. operating voltage	Order details	
	limp 10/350 kA	Imax 8/20 kA	In kA	Ifi kV	Up kV	Un V	Uc V	Type code	Order code
1+1	-	40	20	-	1.5	230	350	eOVR T2 1N 40-350	2TAM901100R4501
3+1	-	40	20	-	1.5	230/400	350	eOVR T2 3N 40-350	2TAM903100R4501
3+1	-	80	20	-	2.1	400/690	440	eOVR T2 3N 80-440s	2TAM903100R5811
3	-	40	20	-	1.8	230/400	275	eOVR T2 3L 40-275s	2TAM903000R4411

eOVR T2-T3 1N 20-275

Protected lines	Impulse current	Max discharge current	Nominal current	Follow current interrupting ingrating Ifi	Voltage protection level	Nominal voltage	Max. cont. operating voltage	Order details	
	limp 10/350 kA	Imax 8/20 kA	In kA	Ifi kV	Up kV	Un V	Uc V	Type code	Order code
1+1	-	20	5	-	1.4	230	275	eOVR T2-T3 1N 20-275	2TAM921100R3401
3+1	-	20	5	-	1.4	230/400	275	eOVR T2-T3 3N 20-275	2TAM923100R3401

Protection and safety

eOVR T1-T2

				eOVR T1-T2 3N 12.5-275s
	Monitoring	**Surge event counter**		●
		SPD end of life prediction		●
		SSD/back up status		●
		SPD status		●
		Ambient temperature		●
		Nominal voltage		●
		Surge amplitude		●
		Surge current polarity		-
		Surge energy		-
		Surge time		●
	Detection	**Surge detectable value**		1kA~80kA
		Surge level to trigger event counter		>1kA
		Leakage current resolution		1μA
		Leakage current measurement range		1μA~500μA
		Maximum measuring period	s	-
		Sampling rate	Hz	-
	Alarm	**Front face blinking LED**		●
		Audible alarm		-
		Leakage current		●
		Over voltage		●
		Undervoltage		●
		Back up protection status		●
		MOV end of life		●
		SPD status		●
	Record	**Local memory capacity**		20 surge events and 10 spd remote signal status change record
	Communication	**Intranet**		Modbus RS-485
		Cloud		ABB InSite Pro M
		Third party		ABB Ability
	ABB Insite Pro M interface	**Customized dashboard**		●
		Product location		●
		Alarm setting		●
		Historical events extraction		●
		Multiple SPD monitoring		●
		Customized email notification		●
		Automatical maintenance suggestion		●
	Standard	**Electromagnetic Compatibility (EMC)**		EN 61000-6-2/EN 61000-6-3

	eOVR T1-T2 3N 12.5-440s	**eOVR T1-T2 3L 12.5-440s**	**eOVR T1-T2 4L 12.5-440s**
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	-	-	-
	-	-	-
	●	●	●
	1kA~80kA	1kA~80kA	1kA~80kA
	>1kA	>1kA	>1kA
	1µA	1µA	1µA
	1µA~500µA	1µA~500µA	1µA~500µA
	-	-	-
	-	-	-
	●	●	●
	-	-	-
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	20 surge events and 10 spd remote signal status change record	20 surge events and 10 spd remote signal status change record	20 surge events and 10 spd remote signal status change record
	Modbus RS-485	Modbus RS-485	Modbus RS-485
	ABB InSite Pro M	ABB InSite Pro M	ABB InSite Pro M
	ABB Ability	ABB Ability	ABB Ability
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	EN 61000-6-2/EN 61000-6-3	EN 61000-6-2/EN 61000-6-3	EN 61000-6-2/EN 61000-6-3

Protection and safety

eOVR T1-T2

					eOVR T1-T2 3N 12.5-275s
	Key characteristics	**Protection mode**			L-N/N-PE/L-PE/L-L
		Number of protected lines			3P+N
		Test class			I-II / T1-T2
		Pluggable cartrige			●
		Integrated thermal disconnector			●
		End of life indicator			●
		Safety reserve			●
	Electrical characteristics	**System network**			TT, TNS
		Nominal discharge current	In (8/20)	kA	20
		Maximal discharge current	Imax (8/20)	kA	80
		Impulse current	Iimp (10/350)		12,5
		Maximal continuous operating voltage	Uc	kA	275
		Voltage protection level at In	Up (L-PE)	kV	1,35
		Voltage protection level at In	Up (L-N)	kV	1,2
		Voltage protection level at In	Up (N-PE)	kV	1,1
		Short circuit withstand	Isccr	kA	100
		Total current	Itotal	kA	50
		Follow current interrupted	Ifi	kA	-/0,1
		Ground residual current	Ipe	µA	< 10
		TOV withstand (L-N : 5s / N-PE : 200 ms)	Ut	V	337 / 1200
		Voltage Combination wave		kV	20
	Required thermal/back up protection maximum rating	**MCB S200 or POD**			-
		Curve B or C Circuit breaker		A	-
		gG - gL fuse		A	< 125
	Standard	**Surge Protective Devices**			IEC 61643-11 / GB/T 18802.1
	Miscellaneous characteristics	**Response time**		ns	25
		Fire resistance according to UL 94			V-0
	Replacement cartridges	**Phase / Product ID**			2CTB815710R2600
		Neutral / Product ID			2CTB815710R2700
Global	**Electrical characteristics**	**Nominal voltage**		V	230
		Type of current / frequency		Hz	a.c 47-63
	Mechanical characteristics	**Wire range : Solid/Stranded**		mm^2	2,5...16
		Stripping lenght		mm	12,5
		Tightening torque		N.m	2,8
		Dimensions	W x D x H	mm	98.5 x 69.4 x 111
		Weight		kg	0,865
		Packing quantities		pce	1
		Protection level			IP 20
		Maximal altitude		m	2000
	Miscellaneous characteristics	**Temperature**		°C	-40 to +80°C
		Relative humidity		% R.H	5-95
	Standard	**Intelligent Surge Protective Devices**			NB/T 10284

	eOVR T1-T2 3N 12.5-440s	**eOVR T1-T2 3L 12.5-440s**	**eOVR T1-T2 4L 12.5-440s**
	L-N/N-PE/L-PE/L-L	L-L/L-PE	L-N/N-PE/L-PE/L-L
	3P+N	3L	4L
	I-II / T1-T2	I-II / T1-T2	I-II / T1-T2
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	TT, TNS	TNC	TNS
	20	20	20
	80	80	80
	12,5	12,5	12,5
	440	440	440
	2	2	1,9
	1,9	-	3,8
	1,9	-	1,9
	100	100	100
	50	37,5	50
	-/0,1	-/0,1	-/0,1
	< 10	< 10	< 10
	337 / 1200	337 / 1200	337 / 1200
	20	20	20
	-	-	-
	-	-	-
	< 125	< 125	< 125
	IEC 61643-11 / GB/T 18802.1	IEC 61643-11 / GB/T 18802.1	IEC 61643-11 / GB/T 18802.1
	25	25	25
	V-0	V-0	V-0
	2CTB815710R5500	2CTB815710R5500	2CTB815710R5500
	2CTB815710R5600	-	2CTB815710R5500
	400	400	400
	a.c 47-63	a.c 47-63	a.c 47-63
	2,5...16	2,5...16	2,5...16
	12,5	12,5	12,5
	2,8	2,8	2,8
	151.9 x 69.4 x 111	137.2 x 69.4 x 111	169.7 x 69.4 x 111
	1,16	1,052	1,321
	1	1	1
	IP 20	IP 20	IP 20
	2000	2000	2000
	-40 to +80°C	-40 to +80°C	-40 to +80°C
	5-95	5-95	5-95
	NB/T 10284	NB/T 10284	NB/T 10284

Protection and safety

eOVR T2

				eOVR T2 1N 40-350
	Monitoring	**Surge event counter**		●
		SPD end of life prediction		●
		SSD/back up status		●
		SPD status		●
		Ambient temperature		●
		Nominal voltage		●
		Surge amplitude		●
		Surge current polarity		-
		Surge energy		-
		Surge time		●
	Detection	**Surge detectable value**		1kA~80kA
		Surge level to trigger event counter		>1kA
		Leakage current resolution		1μA
		Leakage current measurement range		1μA~500μA
		Maximum measuring period	s	-
		Sampling rate	Hz	-
	Alarm	**Front face blinking LED**		●
		Audible alarm		-
		Leakage current		●
		Over voltage		●
		Undervoltage		●
		Back up protection status		●
		MOV end of life		●
		SPD status		●
	Record	**Local memory capacity**		20 surge events and 10 spd remote signal status change record
	Communication	**Intranet**		Modbus RS-485
		Cloud		ABB InSite Pro M
		Third party		ABB Ability
	ABB Insite Pro M interface	**Customized dashboard**		●
		Product location		●
		Alarm setting		●
		Historical events extraction		●
		Multiple SPD monitoring		●
		Customized email notification		●
		Automatical maintenance suggestion		●
	Standard	**Electromagnetic Compatibility (EMC)**		EN 61000-6-2/EN 61000-6-3

	eOVR T2 3N 40-350	**eOVR T2 3N 80-440s**	**eOVR T2 3L 40-275s**
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	-	-	-
	-	-	-
	●	●	●
	1kA~80kA	1kA~80kA	1kA~80kA
	>1kA	>1kA	>1kA
	1µA	1µA	1µA
	1µA~500µA	1µA~500µA	1µA~500µA
	-	-	-
	-	-	-
	●	●	●
	-	-	-
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	20 surge events and 10 spd remote signal status change record	20 surge events and 10 spd remote signal status change record	20 surge events and 10 spd remote signal status change record
	Modbus RS-485	Modbus RS-485	Modbus RS-485
	ABB InSite Pro M	ABB InSite Pro M	ABB InSite Pro M
	ABB Ability	ABB Ability	ABB Ability
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	●	●	●
	EN 61000-6-2/EN 61000-6-3	EN 61000-6-2/EN 61000-6-3	EN 61000-6-2/EN 61000-6-3

Protection and safety

eOVR T2

					eOVR T2 1N 40-350
	Key characteristics	**Protection mode**			L-N/N-PE/L-PE/L-L
		Number of protected lines			1P+N
		Test class			II / T2
		Pluggable cartrige			●
		Integrated thermal disconnector			●
		End of life indicator			●
		Safety reserve			-
	Electrical characteristics	**System network**			TT, TNS
		Nominal discharge current	In (8/20)	kA	20
		Maximal discharge current	Imax (8/20)	kA	40
		Impulse current	Iimp (10/350)		-
		Maximal continuous operating voltage	Uc	kA	350
		Voltage protection level at In	Up (L-PE)	kV	1,5
		Voltage protection level at In	Up (L-N)	kV	1,4
		Voltage protection level at In	Up (N-PE)	kV	1,25
		Short circuit withstand	Isccr	kA	100
		Total current	Itotal	kA	80
		Follow current interrupted	Ifi	kA	-/0,1
		Ground residual current	Ipe	µA	< 10
		TOV withstand (L-N : 5s / N-PE : 200 ms)	Ut	V	337 / 1200
		Voltage Combination wave		kV	20
	Required thermal/back up protection maximum rating	**MCB S200 or POD**			●
		Curve B or C Circuit breaker		A	< 125
		gG - gL fuse		A	< 125
	Standard	**Surge Protective Devices**			IEC 61643-11 / GB/T 18802.1
	Miscellaneous characteristics	**Response time**		ns	25
		Fire resistance according to UL 94			V-0
	Replacement cartridges	**Phase / Product ID**			2CTB803886R1000
		Neutral / Product ID			2CTB803886R0000
Global	**Electrical characteristics**	**Nominal voltage**		V	230
		Type of current / frequency		Hz	a.c 47-63
	Mechanical characteristics	**Wire range : Solid/Stranded**		mm^2	2,5...16
		Stripping lenght		mm	12,5
		Tightening torque		N.m	2,8
		Dimensions	W x D x H	mm	62.9 x 58 x 111
		Weight		kg	0,46
		Packing quantities		pce	1
		Protection level			IP 20
		Maximal altitude		m	2000
	Miscellaneous characteristics	**Temperature**		°C	-40 to +80°C
		Relative humidity		% R.H	5-95
	Standard	**Intelligent Surge Protective Devices**			NB/T 10284

eOVR T2 3N 40-350	**eOVR T2 3N 80-440s**	**eOVR T2 3L 40-275s**
L-N/N-PE/L-PE/L-L	L-N/N-PE/L-PE/L-L	L-L/L-PE
3P+N	3P+N	3L
II / T2	II / T2	II / T2
●	●	●
●	●	●
●	●	●
-	●	●
TT, TNS	TT, TNS	TNC
20	20	20
40	80	40
-	-	-
350	440	275
1,5	2,1	1,4
1,4	1,8	-
1,25	2	-
100	100	100
80	80	80
-/0,1	-/0,1	-/0,1
< 10	< 10	< 10
337 / 1200	337 / 1200	337 / 1200
20	20	20
●	●	●
< 125	< 125	< 125
< 125	< 125	< 125
IEC 61643-11 / GB/T 18802.1	IEC 61643-11 / GB/T 18802.1	IEC 61643-11 / GB/T 18802.1
25	25	25
V-0	V-0	V-0
2CTB803886R1000	2CTB815708R5500	2CTB815704R2600
2CTB803886R0000	2CTB815708R5700	-
230	400	230
a.c 47-63	a.c 47-63	a.c 47-63
2,5...16	2,5...16	2,5...16
12,5	12,5	12,5
2,8	2,8	2,8
98.5 x 58 x 111	98.5 x 69.4 x 111	83.6 x 69.4 x 111
0,715	0,835	0,692
1	1	1
IP 20	IP 20	IP 20
2000	2000	2000
-40 to +80°C	-40 to +80°C	-40 to +80°C
5-95	5-95	5-95
NB/T 10284	NB/T 10284	NB/T 10284

Protection and safety

eOVR T2-T3

				eOVR T2-T3 1N 20-275
	Monitoring	**Surge event counter**		●
		SPD end of life prediction		●
		SSD/back up status		●
		SPD status		●
		Ambient temperature		●
		Nominal voltage		●
		Surge amplitude		●
		Surge current polarity		-
		Surge energy		-
		Surge time		●
	Detection	**Surge detectable value**		1kA~80kA
		Surge level to trigger event counter		>1kA
		Leakage current resolution		1μA
		Leakage current measurement range		1μA~500μA
		Maximum measuring period	s	-
		Sampling rate	Hz	-
	Alarm	**Front face blinking LED**		●
		Audible alarm		-
		Leakage current		●
		Over voltage		●
		Undervoltage		●
		Back up protection status		●
		MOV end of life		●
		SPD status		●
	Record	**Local memory capacity**		20 surge events and 10 spd remote signal status change record
	Communication	**Intranet**		Modbus RS-485
		Cloud		ABB InSite Pro M
		Third party		ABB Ability
	ABB Insite Pro M interface	**Customized dashboard**		●
		Product location		●
		Alarm setting		●
		Historical events extraction		●
		Multiple SPD monitoring		●
		Customized email notification		●
		Automatical maintenance suggestion		●
	Standard	**Electromagnetic Compatibility (EMC)**		EN 61000-6-2/EN 61000-6-3

	eOVR T2-T3 3N 20-275
	●
	●
	●
	●
	●
	●
	●
	-
	-
	●
	1kA~80kA
	>1kA
	1µA
	1µA~500µA
	-
	-
	●
	-
	●
	●
	●
	●
	●
	●
	20 surge events and 10 spd remote signal status change record
	Modbus RS-485
	ABB InSite Pro M
	ABB Ability
	●
	●
	●
	●
	●
	●
	●
	EN 61000-6-2/EN 61000-6-3

Protection and safety

eOVR T2-T3

					eOVR T2-T3 1N 20-275
	Key characteristics	**Protection mode**			L-N/N-PE/L-PE/L-L
		Number of protected lines			1P+N
		Test class			II-III / T2-T3
		Pluggable cartrige			●
		Integrated thermal disconnector			●
		End of life indicator			●
		Safety reserve			-
	Electrical characteristics	**System network**			TT,TNS
		Nominal discharge current	In (8/20)	kA	5
		Maximal discharge current	Imax (8/20)	kA	20
		Impulse current	Iimp (10/350)		-
		Maximal continuous operating voltage	Uc	kA	275
		Voltage protection level at In	Up (L-PE)	kV	1,4
		Voltage protection level at In	Up (L-N)	kV	0,9
		Voltage protection level at In	Up (N-PE)	kV	1,4
		Short circuit withstand	Isccr	kA	100
		Total current	Itotal	kA	80
		Follow current interrupted	Ifi	kA	-/0,1
		Ground residual current	Ipe	µA	< 10
		TOV withstand (L-N : 5s / N-PE : 200 ms)	Ut	V	337 / 1200
		Voltage Combination wave		kV	20
	Required thermal/back up protection maximum rating	**MCB S200 or POD**			●
		Curve B or C Circuit breaker		A	< 125
		gG - gL fuse		A	< 125
	Standard	**Surge Protective Devices**			IEC 61643-11 / GB/T 18802.1
	Miscellaneous characteristics	**Response time**		ns	25
		Fire resistance according to UL 94			V-0
	Replacement cartridges	**Phase / Product ID**			2CTB803876R1200
		Neutral / Product ID			2CTB803876R0000
Global	**Electrical characteristics**	**Nominal voltage**		V	230
		Type of current / frequency		Hz	a.c 47-63
	Mechanical characteristics	**Wire range : Solid/Stranded**		mm^2	2,5...16
		Stripping lenght		mm	12,5
		Tightening torque		N.m	2,8
		Dimensions	W x D x H	mm	62.9 x 58 x 111
		Weight		kg	0,453
		Packing quantities		pce	1
		Protection level			IP 20
		Maximal altitude		m	2000
	Miscellaneous characteristics	**Temperature**		°C	-40 to +80°C
		Relative humidity		% R.H	5-95
	Standard	**Intelligent Surge Protective Devices**			NB/T 10284

	eOVR T2-T3 3N 20-275
	L-N/N-PE/L-PE/L-L
	3P+N
	II-III / T2-T3
	●
	●
	●
	-
	TT,TNS
	5
	20
	-
	275
	1,4
	0,9
	1,4
	100
	80
	-/0,1
	< 10
	337 / 1200
	20
	●
	< 125
	< 125
	IEC 61643-11 / GB/T 18802.1
	25
	V-0
	2CTB803876R1200
	2CTB803876R0000
	230
	a.c 47-63
	2,5...16
	12,5
	2,8
	98.5 x 58 x 111
	0,694
	1
	IP 20
	2000
	-40 to +80°C
	5-95
	NB/T 10284

Protection and safety

Accessories for OVR

Accessory for Cartridge Lock

Accessory for Cartridge Lock

This accessory can be fitted into the front of the socket of the SPD of the QS and PV range (for other families please consult us), QS and PV range, to guarantee an even higher withstand to vibrations and shocks, it reinforces mechanical lock between the cartridges and the socket (they are already locked by the pins in the back of the cartridge). It's recommended for stressful environments as the nazelle of the wind turbines. It's sold on packs of 50.

	Bbn 3660308	Order details		Price 1 piece	Weight 1 piece
	EAN	Type code	Order code		kg
Accessory for Cartridge Lock (x50)	526649		2CTB814355Z1200		0.01

Accessory for Auxiliary contact lock

Accessory for Auxiliary contact lock

This accessory can be fitted into the top of the auxiliary contact module and guarantees an even higher withstand to stressful environments. It reinforces the mechanical lock between the auxiliary contact module and the socket of the SPD. It's recommended in environments where the cables of the auxiliary contact can suffer pulls due to the limited length of the auxiliary cables that restrict any potential movements. It's sold on packs of 50. It can not be used on single pole devices. Please order it for multipole versions.

	Bbn 3660308	Order details		Price 1 piece	Weight 1 piece
	EAN	Type code	Order code		kg
Accessory for Auxiliary contact lock (x50)	524805		2CTB814355R2700		0.01

Label for Surge Protected Installations

This label allows the user to identify the panels where surge protection devices are fitted. It's meant to be used in the inside of the panel door and clearly states that the cartridges need to be removed to perform insulation tests. It's sold in packs of 100.

	Bbn 3660308	Order details		Price 1 piece	Weight 1 piece
	EAN	Type code	Order code		kg
Label for Surge Protected Installations (x 100)			2CTB813860R1500		0.01

Notes

Protection and safety

OVR surge protective devices – UL Version
Selection tables

Choosing the correct model

1) Determine the service voltage
Consult qualified personnel if the facility or operation service voltage is unknown.

2) Select the SPD maximum continuous operating voltage (MCOV, Uc)
The MCOV should correspond to the service voltage.
Example: If the service voltage is 480 V Delta, an SPD with 550 V or 660 V MCOV will be required.
Surge protection devices must also provide a level of protection compatible with the withstand voltage of the equipment. This withstand voltage depends on the type of equipment and its sensitivity. The incoming surge protector may not provide adequate protection by itself, as certain electrical phenomena may greatly increase its residual voltage if cable lengths exceed 10 m. A second SPD may be necessary.

3) Select the SPD surge capacity (Imax)
Surge capacity is the amount of energy the SPD can withstand from a single surge event. The higher the surge capacity, the longer the device will protect the system. A second surge protector may be required if the surge capacity of the first is not capable of diverting all surge current to ground. See coordination below.

4) Remote monitoring (Optional)
Integrated auxiliary contact for remote monitoring available on models with "TS" designation. Consult "Selection tables" on next page for help in the selection of SPDs.

Complete facility protection
Installing surge protection at the main distribution panel is only the beginning of protecting the entire operation. As most transient surges are created internally, it is necessary to install surge protection at sub-distribution panels (equipment protection) to be fully protected. Stepping down the Imax level from the service entrance panel toward equipment to be protected is recommended.
For example, if a 40 kA Imax SPD is installed in the main distribution panel, then 15 kA Imax SPDs should be installed in sub-distribution panels for equipment protection.

Coordination
It may be necessary to add a second surge protector, wired to the incoming unit, to achieve the required voltage protection and/or surge capacity. For Type 2 or 4 SPDs, installing this second unit a minimum of 1 m from the first unit will allow the two to work together, achieving the required protection.

Wiring rules
The impedance of the cables increases the voltage across the connected equipment. Therefore, the length of the cable between the surge protector and the equipment should be minimized.
The surge protective device should be installed as close to the equipment to be protected as possible. If this is not possible (the equipment is over 30 m from the panel), then a second surge protector must be installed.

Protected lines	Impulse current Iimp 10/350	Max. discharge current Imax 8/20	Nominal discharge current In	Follow current interrupting rating Ifi	Voltage protection Rating VPR	Nominal voltage Un	Max. cont. operating voltage MCOV	Order details	
	kA	kA	kA	kA	kV	V	V	Type code	Order code
Type 2 - Pluggable - Single Pole networks									
1	–	15	5	–	0.6	120	150	OVR T2 15-150 P U	2CTB802341R0000
1	–	15	5	–	1	277 ±15%	320	OVR T2 15-320 P U	2CTB802341R0400
1	–	40	20	–	0.6	120	150	OVR T2 40-150 P U	2CTB802341R2000
1	–	40	20	–	0.6	120	150	OVR T2 40-150 P TS U	2CTB802341R2100
1	–	40	20	–	1	277 ±15%	320	OVR T2 40-320 P U	2CTB802341R2400
1	–	40	20	–	1	277 ±15%	320	OVR T2 40-320 P TS U	2CTB802341R2500
1	–	40	10	–	1.3	347 ±15%	440	OVR T2 40-440 P TS U	2CTB802341R2900
1	–	40	10	–	1.7	480 ±15%	550	OVR T2 40-550 P TS U	2CTB802341R3300
1	–	40	10	–	1.9	600 ±15%	660	OVR T2 40-660 P TS U	2CTB802341R3700
Neutral									
1	–	70	20	0.1	1.2	230	275	OVR T2 70 N P U	2CTB802341R8000
Cartridges									
1	–	–	–	–	–	120 ±15%	175	OVR T2 15-150 C U	2CTB802348R2500
1	–	–	–	–	–	277 ±15%	320	OVR T2 15-320 C U	2CTB802348R2700
1	–	–	–	–	–	120 ±15%	175	OVR T2 40-150 C U	2CTB802348R3500
1	–	–	–	–	–	277 ±15%	320	OVR T2 40-320 C U	2CTB802348R3700
1	–	–	–	–	–	347 ±15%	440	OVR T2 40-440 C U	2CTB802348R3900
1	–	–	–	–	–	480 ±15%	550	OVR T2 40-550 C U	2CTB802348R4100
1	–	–	–	–	–	600 ±15%	660	OVR T2 40-660 C U	2CTB802348R4300
1	–	–	–	–	–	230	275	OVR T2 70 N C U	2CTB802348R6500

Protection and safety

OVR surge protective devices – UL Version

Selection tables

Pro-tected lines	Impulse current Iimp 10/350	Max. discharge current Imax 8/20	Nominal discharge current In	Follow current interrupting rating Ifi	Voltage protection Rating VPR	Nominal voltage Un	Max. cont. operating voltage MCOV	Order details	
	kA	kA	kA	kA	kV	V	V	Type code	Order code
Type 2 - Pluggable - Delta networks									
3	–	15	5	–	1	277 +15%	320	OVR T2 3L 15-320 P U	2CTB802345R0400
								OVR T2 3L 40-320 P U	2CTB802345R2400
3	–	40	20	–	1	277 ±15%	320	OVR T2 3L 40-320 P TS U	2CTB802345R2500
3	–	40	10	–	1.7	480 ±15%	550	OVR T2 3L 40-550 P U	2CTB802345R3400
3	–	40	10	–	1.7	480 ±15%	550	OVR T2 3L 40-550 P TS U	2CTB802345R3300
Cartridges									
1	–	–	–	–	–	277 ±15%	320	OVR T2 15-320 C U	2CTB802348R2700
1	–	–	–	–	–	277 ±15%	320	OVR T2 40-320 C U	2CTB802348R3700
1	–	–	–	–	–	480 ±15%	550	OVR T2 40-550 C U	2CTB802348R4100
Type 2 - Pluggable - Single Phase networks									
2	–	15	5	–	1.2	120	150	OVR T2 1N 15-150 P U	2CTB802342R0000
2	–	15	5	–	1.2	277	320	OVR T2 1N 15-320 P U	2CTB802342R0400
2	–	40	20	–	1.2	120	150	OVR T2 1N 40-150 P U	2CTB802342R2000
2	–	40	20	–	1.2	120	150	OVR T2 1N 40-150 P U (x10)	2CTB802342R8000
2	–	40	20	–	1.2	120	150	OVR T2 1N 40-150 P TS U	2CTB802342R2100
2	–	40	20	–	1.2	277	320	OVR T2 1N 40-320 P TS U	2CTB802342R2500
2	–	40	10	–	1.2	347	440	OVR T2 1N 40-440 P TS U	2CTB802342R2900
2	–	40	10	–	1.2	480	550	OVR T2 1N 40-550 P TS U	2CTB802342R3300
2	–	40	10	–	1.2	600	660	OVR T2 1N 40-660 P TS U	2CTB802342R3700
Cartridges									
1	–	–	–	–	–	120 ±15%	175	OVR T2 15-150 C U	2CTB802348R2500
1	–	–	–	–	–	277 ±15%	320	OVR T2 15-320 C U	2CTB802348R2700
1	–	–	–	–	–	120 ±15%	175	OVR T2 40-150 C U	2CTB802348R3500
1	–	–	–	–	–	277 ±15%	320	OVR T2 40-320 C U	2CTB802348R3700
1	–	–	–	–	–	347 ±15%	440	OVR T2 40-440 C U	2CTB802348R3900
1	–	–	–	–	–	480 ±15%	550	OVR T2 40-550 C U	2CTB802348R4100
1	–	–	–	–	–	600 ±15%	660	OVR T2 40-660 C U	2CTB802348R4300
Type 2 - Pluggable - Split Phase networks									
2	–	15	5	–	0.6	120 ±15%	175	OVR T2 2L 15-150 P U	2CTB802343R0000
2	–	15	5	–	1	277 ±15%	320	OVR T2 2L 15-320 P U	2CTB802343R0400
3	–	15	5	–	0.7	120 ±15%	175	OVR T2 2N 15-150 P U	2CTB802344R0000
3	–	15	5	–	1.1	277 ±15%	320	OVR T2 2N 15-320 P U	2CTB802344R0400
2	–	40	20	–	0.6	120 ±15%	175	OVR T2 2L 40-150 P TS U	2CTB802343R2100
2	–	40	20	–	1	277 ±15%	320	OVR T2 2L 40-320 P TS U	2CTB802343R2500
3	–	40	20	–	0.7	120 ±15%	175	OVR T2 2N 40-150 P TS U	2CTB802344R2100
3	–	40	20	–	1.1	277 ±15%	320	OVR T2 2N 40-320 P TS U	2CTB802344R2500
3	–	40	10	–	1.4	347 ±15%	440	OVR T2 2N 40-440 P TS U	2CTB802344R2900
3	–	40	10	–	1.8	480 ±15%	550	OVR T2 2N 40-550 P TS U	2CTB802344R3300
3	–	40	10	–	2	600 ±15%	660	OVR T2 2N 40-660 P TS U	2CTB802344R3700
Cartridges									
1	–	–	–	–	–	120 ±15%	175	OVR T2 15-150 C U	2CTB802348R2500
1	–	–	–	–	–	277 ±15%	320	OVR T2 15-320 C U	2CTB802348R2700
1	–	–	–	–	–	120 ±15%	175	OVR T2 40-150 C U	2CTB802348R3500
1	–	–	–	–	–	277 ±15%	320	OVR T2 40-320 C U	2CTB802348R3700
1	–	–	–	–	–	347 ±15%	440	OVR T2 40-440 C U	2CTB802348R3900
1	–	–	–	–	–	480 ±15%	550	OVR T2 40-550 C U	2CTB802348R4100
Type 2 - Pluggable - Grounded Wye networks									
3	–	15	5	–	0.6	120 ±15%	175	OVR T2 3L 15-150 P U	2CTB802345R0000
4	–	15	5	–	0.6	120 ±15%	175	OVR T2 3N 15-150 P U	2CTB802346R0000
4	–	15	5	–	1.2	277 ±15%	320	OVR T2 3N 15-320 P U	2CTB802346R0400
3	–	40	20	–	0.6	120 ±15%	175	OVR T2 3L 40-150 P TS U	2CTB802345R2100
3	–	40	10	–	1.3	347 ±15%	440	OVR T2 3L 40-440 P TS U	2CTB802345R2900
4	–	40	10	–	1.2	600 ±15%	660	OVR T2 3L 40-550 P U	2CTB802345R3400
4	–	40	20	–	1.2	120 ±15%	175	OVR T2 3N 40-150 P TS U	2CTB802346R2100
4	–	40	20	–	1.2	277 ±15%	320	OVR T2 3N 40-320 P TS U	2CTB802346R2500
4	–	40	10	–	1.2	347 ±15%	440	OVR T2 3N 40-440 P TS U	2CTB802346R2900
4	–	40	10	–	1.2	480 ±15%	550	OVR T2 3N 40-550 P TS U	2CTB802346R3300
4	–	40	10	–	1.2	600 ±15%	660	OVR T2 3N 40-660 P TS U	2CTB802346R3700
Cartridges									
1	–	–	–	–	–	120 ±15%	175	OVR T2 15-150 C U	2CTB802348R2500
1	–	–	–	–	–	120 ±15%	175	OVR T2 40-150 C U	2CTB802348R3500
1	–	–	–	–	–	347 ±15%	440	OVR T2 40-440 C U	2CTB802348R3900
1	–	–	–	–	–	277 ±15%	320	OVR T2 15-320 C U	2CTB802348R2700
1	–	–	–	–	–	277 ±15%	320	OVR T2 40-320 C U	2CTB802348R3700
1	–	–	–	–	–	480 ±15%	550	OVR T2 40-550 C U	2CTB802348R4100
1	–	–	–	–	–	600 ±15%	660	OVR T2 40-660 C U	2CTB802348R4300

Protection and safety

OVR Type 2 surge protective devices - Single pole

OVR T2 40-150 P U

OVR T2 40-440 P TS U

OVR T2 70 N P U

Descripiton

Single pole devices provide great flexibility for any kind of network configuration.
OVR T2 devices provide the best protection as they are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (VPR). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Ordering details

Pro-tected lines	Max dis-charge current Imax 8/20	Nomi-nal dis-charge current In	Voltage protec-tion rating VPR	Nominal voltage Un	Max. cont. operat-ing voltage MCOV	Bbn 3660308	Order details		Weight Pkg (1 pce)
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
Pluggable									
1	15	5	0.6	120	150	518514	OVR T2 15-150 P U	2CTB802341R0000	0.12
1	15	5	1	277 ±15%	320	518521	OVR T2 15-320 P U	2CTB802341R0400	0.12
1	40	20	0.6	120	150	518958	OVR T2 40-150 P U	2CTB802341R2000	0.12
1	40	20	0.6	120	150	518958	OVR T2 40-150 P TS U	2CTB802341R2100	0.12
1	40	20	1	277 ±15%	320	518965	OVR T2 40-320 P U	2CTB802341R2400	0.12
1	40	20	1	277 ±15%	320	518545	OVR T2 40-320 P TS U	2CTB802341R2500	0.12
1	40	10	1.3	347 ±15%	440	518552	OVR T2 40-440 P TS U	2CTB802341R2900	0.12
1	40	10	1.7	480 ±15%	550	518569	OVR T2 40-550 P TS U	2CTB802341R3300	0.12
1	40	10	1.9	600 ±15%	660	518576	OVR T2 40-660 P TS U	2CTB802341R3700	0.12
Neutral - Pluggable									
1	70	20	1.2	230	275	518583	OVR T2 70 N P U	2CTB802341R8000	0.12

Protection and safety

OVR Type 2 surge protective devices - Single phase networks

OVR T2 1N 40-150 P U

OVR T2 1N 40-660 P TS U

Description

Single phase devices are composed by a MOV pole plus a spark gap one. The spark gap pole guarantees the lowest voltage protection rating and has to be connected to the Neutral.
OVR T2 devices provide the best protection as they are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (VPR). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Ordering details

Protected lines	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection rating VPR	Nominal voltage Un	Max. cont. operating voltage MCOV, Uc	Bbn 3660308	Order details		Weight Pkg (1 pce)
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
Pluggable									
2	15	5	1.2	120	150	519238	OVR T2 1N 15-150 P U	2CTB802342R0000	0.24
2	15	5	1.2	277	320	519245	OVR T2 1N 15-320 P U	2CTB802342R0400	0.24
2	40	20	1.2	120	150	520869	OVR T2 1N 40-150 P U	2CTB802342R2000	0.24
2	40	20	1.2	120	150	520876	OVR T2 1N 40-150 P U (x10)	2CTB802342R8000	0.24
2	40	20	1.2	120	150	819252	OVR T2 1N 40-150 P TS U	2CTB802342R2100	0.24
2	40	20	1.2	277	320	519269	OVR T2 1N 40-320 P TS U	2CTB802342R2500	0.24
2	40	10	1.2	347	440	519276	OVR T2 1N 40-440 P TS U	2CTB802342R2900	0.24
2	40	10	1.2	480	550	519283	OVR T2 1N 40-550 P TS U	2CTB802342R3300	0.24
2	40	10	1.2	600	660	519290	OVR T2 1N 40-660 P TS U	2CTB802342R3700	0.24

(x10) packaging of 10 pieces.

Protection and safety

OVR Type 2 surge protective devices - Single pole

	Type		**OVR T2 15-150 P U**	**OVR T2 15-320 P U**	**OVR T2 40-150 P U**
	with auxiliary contact (TS)		**–**	**–**	**OVR T2 40-150 P TS U**
	Technology		Varistor	Varistor	Varistor
Electrical features					
	Standard		UL 1449	UL 1449	UL 1449
	Type / test class (UL 1449)		1	1	1
	Protected lines		1	1	1
	System network		–	–	–
	Type of current / frequency		AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
	Voltage regulation of the system network		±15%	±15%	±15%
	Nominal system voltage Un		120 V	277 V	120 V
	Maximum continuous operating voltage MCOV		150 V	320 V	150 V
	Maximal discharge current (8/20) Imax		15 kA	15 kA	40 kA
	Nominal discharge current (8/20) In		5 kA	5 kA	20 kA
	Voltage protection rating (L-N / N-G / L-G) VPR		0.6 kV	1 kV	0.6 kV
	Response time		< 25 ns	< 25 ns	< 25 ns
	Short circuit withstand SCCR		200 kA	200 kA	200 kA
	Back up protection maximum rating	fuse (gG - gL)	≤ 100 A	≤ 100 A	≤ 100 A
		circuit breaker (B or C Curve)	≤ 125 A	≤ 125 A	≤ 125 A
	Pluggable cartridges		Yes	Yes	Yes
	Integrated QuickSafe® technology		Yes	Yes	Yes
	State indicator		Yes	Yes	Yes
	Safety reserve		–	–	–
	Auxiliary contact (TS)		No	No	Yes (TS option)
Installation					
	Wire range (L,N,PE)	solid wire	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²
		stranded wire	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²
	Stripping length (L,N,PE)		12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm
	Tightening torque (L,N,PE)		2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm
Auxiliary contact (TS)					
	Contact information		–	–	1 NO – 1 NC
	Min. load		–	–	12 V DC – 10 mA
	Max. load		–	–	250 V AC – 1 A
	Connection cross section		–	–	1.5 / 16 mm²
Miscellaneous characteristics					
	Stocking temperature		-40…+80 °C	-40…+80 °C	-40…+80 °C
	Maximal Altitude		5 000 m	5 000 m	5 000 m
	Operating temperature		-40…+176 °F	-40…+176 °F	-40…+176 °F
	Degree of protection		NEMA 1	NEMA 1	NEMA 1
	Fire resistance according to UL 94		V0	V0	V0
	Dimensions	mm h x w x d	88 x 17.8 x 64.8 mm	88 x 17.8 x 64.8 mm	88 x 17.8 x 64.8 mm
		inches h x w x d	3.46 x 0.7 x 2.55 in	3.46 x 0.7 x 2.55 in	3.46 x 0.7 x 2.55 in
	Dimensions with auxiliary contact (TS)	mm h x w x d	–	–	96 x 17.8 x 64.8 mm
		inches h x w x d	–	–	3.78 x 0.7 x 2.55 in
Replacement cartridges					
	Phase product ID	Type	OVR T2 15-150 C U	OVR T2 15-320 C U	OVR T2 40-150 C U
		Order code	2CTB802348R2500	2CTB802348R2700	2CTB802348R3500
	Neutral product ID	Type	–	–	–
		Order code	–	–	–

Protection and safety

OVR Type 2 surge protective devices - Single pole

OVR T2 40-320 P U	**–**	**–**	**–**	**OVR T2 70 N P U**
OVR T2 40-320 P TS U	**OVR T2 40-440 P TS U**	**OVR T2 40-550 P TS U**	**OVR T2 40-660 P TS U**	**–**
Varistor	Varistor	Varistor	Varistor	Spark gap
UL 1449	UL 1449	UL 1449	UL 1449	UL 1449
1	1	1	4	4
1	1	1	1	1
–	–	–	–	–
AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
±15%	±15%	±15%	±15%	+15%
277 V	347 V	480 V	600 V	230 V
320 V	440 V	550 V	660 V	275 V
40 kA	40 kA	40 kA	40 kA	70 kA
20 kA	10 kA	10 kA	10 kA	20 kA
1 kV	1.3 kV	1.7 kV	1.9 kV	1.2 kV
< 25 ns	< 25 ns	< 25 ns	< 25 ns	< 25 ns
200 kA	200 kA	200 kA	200 kA	200 kA
≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A
≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A
Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	No
Yes	Yes	Yes	Yes	Yes
–	–	–	–	–
Yes (TS option)	Yes	Yes	Yes	No
2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²
2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²
12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm
2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm
1 NO – 1 NC	1 NO – 1 NC	1 NO – 1 NC	1 NO – 1 NC	–
12 V DC – 10 mA	12 V DC – 10 mA	12 V DC – 10 mA	12 V DC – 10 mA	–
250 V AC – 1 A	250 V AC – 1 A	250 V AC – 1 A	250 V AC – 1 A	–
1.5 / 16 mm²	1.5 / 16 mm²	1.5 / 16 mm²	1.5 / 16 mm²	–
-40...+80 °C	-40...+80 °C	-40...+80 °C	-40...+80 °C	-40...+80 °C
5 000 m	5 000 m	5 000 m	5 000 m	5 000 m
-40...+176 °F	-40...+176 °F	-40...+176 °F	-40...+176 °F	-40...+176 °F
NEMA 1	NEMA 1	NEMA 1	NEMA 1	NEMA 1
V0	V0	V0	V0	V0
88 x 17.8 x 64.8 mm	–	–	–	88 x 17.8 x 64.8 mm
3.46 x 0.7 x 2.55 in	–	–	–	3.46 x 0.7 x 2.55 in
96 x 17.8 x 64.8 mm	96 x 17.8 x 64.8 mm	96 x 17.8 x 64.8 mm	96 x 17.8 x 64.8 mm	–
3.78 x 0.7 x 2.55 in	3.78 x 0.7 x 2.55 in	3.78 x 0.7 x 2.55 in	3.78 x 0.7 x 2.55 in	–
OVR T2 40-320 C U	OVR T2 40-440 C U	OVR T2 40-550 C U	OVR T2 40-660 C U	–
2CTB802348R3700	2CTB802348R3900	2CTB802348R4100	2CTB802348R4300	–
–	–	–	–	OVR T2 70 N C U
–	–	–	–	2CTB802348R6500

Protection and safety

OVR Type 2 surge protective devices - Single phase networks

General technical data

Type			OVR T2 1N 15-150 P U	OVR T2 1N 15-320 P U	OVR T2 1N 40-150 P U
with auxiliary contact (TS)			–	–	OVR T2 1N 40-150 P TS U
Electrical features					
Standards			UL 1449	UL 1449	UL 1449
Type / test class (UL 1449)			4	4	4
Protected lines			2	2	2
Type of current / frequency			AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			±15%	±15%	±15%
Nominal system voltage Un			120 V	277 V	120 V
Maximum continuous operating voltage MCOV			150 V	320 V	150 V
Maximal discharge current (8/20) Imax			15 kA	15 kA	40 kA
Nominal discharge current (8/20) In			5 kA	5 kA	20 kA
Voltage protection rating (L-N / N-G / L-G) VPR			1.2 kV	1.2 kV	1.2 kV
Response time			< 25 ns	< 25 ns	< 25 ns
Short circuit withstand	SCCR		200 kA	200 kA	200 kA
Back up protection maximum rating	fuse (gG - gL)		≤ 100 A	≤ 100 A	≤ 100 A
	circuit breaker (B or C curve)		≤ 125 A	≤ 125 A	≤ 125 A
Pluggable cartridges			Yes	Yes	Yes
Integrated QuickSafe® technology			Yes	Yes	Yes
State indicator			Yes	Yes	Yes
Safety reserve			–	–	–
Auxiliary contact (TS)			No	No	Yes (TS option)
Installation					
Wire range (L,N,PE)	solid wire		2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²
	stranded wire		2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²
Stripping length (L,N,PE)			12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm
Tightening torque (L,N,PE)			2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm
Auxiliary contact (TS)					
Contact information					2 NO – 2 NC
Min. load					12 V DC – 10 mA
Max. load					250 V AC – 1 A
Connection cross section					1.5 / 16 mm²
Miscellaneous characteristics					
Stocking temperature			-40...+80 °C	-40...+80 °C	-40...+80 °C
Maximal Altitude			5 000 m	5 000 m	5 000 m
Operating temperature			-40...+176 °F	-40...+176 °F	-40...+176 °F
Degree of protection			NEMA 1	NEMA 1	NEMA 1
Fire resistance according to UL 94			V0	V0	V0
Dimensions	mm	h x w x d	90.5 x 35.6 x 64.8 mm	90.5 x 35.6 x 64.8 mm	90.5 x 35.6 x 64.8 mm
	inches	h x w x d	3.56 x 1.4 x 2.55 in	3.56 x 1.4 x 2.55 in	3.56 x 1.4 x 2.55 in
Dimensions with auxiliary contact (TS)	mm	h x w x d	–	–	98.5 x 35.6 x 64.8 mm
	inches	h x w x d	–	–	3.88 x 1.4 x 2.55 in
Replacement cartridges					
Phase product ID	Type		OVR T2 15-150 C U	OVR T2 15-320 C U	OVR T2 40-150 C U
	Order code		2CTB802348R2500	2CTB802348R2700	2CTB802348R3500
Neutral product ID	Type		OVR T2 70 N C U	OVR T2 70 N C U	OVR T2 70 N C U
	Order code		2CTB802348R6500	2CTB802348R6500	2CTB802348R6500

Protection and safety

OVR Type 2 surge protective devices - Single phase networks

–	–	–	–
OVR T2 1N 40-320 P TS U	**OVR T2 1N 40-440 P TS U**	**OVR T2 1N 40-550 P TS U**	**OVR T2 1N 40-660 P TS U**
UL 1449	UL 1449	UL 1449	UL 1449
4	4	4	4
2	2	2	2
AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
±15%	±15%	±15%	±15%
277 V	347 V	480 V	600 V
320 V	440 V	550 V	660 V
40 kA	40 kA	40 kA	40 kA
20 kA	10 kA	10 kA	10 kA
1.2 kV	1.2 kV	1.2 kV	1.2 kV
< 25 ns	< 25 ns	< 25 ns	< 25 ns
200 kA	200 kA	200 kA	200 kA
≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A
≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
–	–	–	–
Yes	Yes	Yes	Yes
2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²
2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²
12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm
2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm
2 NO – 2 NC	2 NO – 2 NC	2 NO – 2 NC	2 NO – 2 NC
12 V DC – 10 mA	12 V DC – 10 mA	12 V DC – 10 mA	12 V DC – 10 mA
250 V AC – 1 A	250 V AC – 1 A	250 V AC – 1 A	250 V AC – 1 A
1.5 / 16 mm²	1.5 / 16 mm²	1.5 / 16 mm²	1.5 / 16 mm²
-40...+80 °C	-40...+80 °C	-40...+80 °C	-40...+80 °C
5 000 m	5 000 m	5 000 m	5 000 m
-40...+176 °F	-40...+176 °F	-40...+176 °F	-40...+176 °F
NEMA 1	NEMA 1	NEMA 1	NEMA 1
V0	V0	V0	V0
–	–	–	–
–	–	–	–
98.5 x 35.6 x 64.8 mm	98.5 x 35.6 x 64.8 mm	98.5 x 35.6 x 64.8 mm	98.5 x 35.6 x 64.8 mm
3.88 x 1.4 x 2.55 in	3.88 x 1.4 x 2.55 in	3.88 x 1.4 x 2.55 in	3.88 x 1.4 x 2.55 in
OVR T2 40-320 C U	OVR T2 40-440 C U	OVR T2 40-550 C U	OVR T2 40-660 C U
2CTB802348R3700	2CTB802348R3900	2CTB802348R4100	2CTB802348R4300
OVR T2 70 N C U	OVR T2 70 N C U	OVR T2 70 N C U	OVR T2 70 N C U
2CTB802348R6500	2CTB802348R6500	2CTB802348R6500	2CTB802348R6500

Protection and safety

OVR Type 2 surge protective devices - Delta networks

OVR T2 3L 15-320 P U

OVR T2 3L 40-320 P TS U

Description

Delta devices provide the protection required by the three phases of a Delta network system.
OVR T2 devices provide the best protection as they are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (VPR). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Ordering details

Protected lines	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection rating VPR	Nominal voltage Un	Max. cont. operating voltage MCOV, Uc	Bbn 3660308	Order details		Weight Pkg (1 pce)
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
Pluggable									
							OVR T2 3L 40-320 P U	2CTB802345R2400	
3	15	5	1	277 ±15%	320	518644	OVR T2 3L 15-320 P U	2CTB802345R0400	0.36
3	40	20	1	277 ±15%	320	518668	OVR T2 3L 40-320 P TS U	2CTB802345R2500	0.36
							OVR T2 3L 40-550 P U		
3	40	10	1.7	480 ±15%	550	518682	OVR T2 3L 40-550 P TS U	2CTB802345R3300	0.36

Protection and safety

OVR Type 2 surge protective devices - Delta networks

General technical data

Type			**OVR T2 3L 15-320 P U**	**OVR T2 3L 40-320 P U**	**OVR T2 3L 40-550 P U**
with auxiliary contact (TS)			**–**	**OVR T2 3L 40-320 P TS U**	**OVR T2 3L 40-550 P TS U**
Electrical features					
Standards			UL 1449	UL 1449	UL 1449
Type / test class (UL 1449)			1	1	1
Protected lines			3	3	3
Type of current / frequency			AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			±15%	±15%	±15%
Nominal system voltage Un			277 V	277 V	480 V
Maximum continuous operating voltage MCOV			320 V	320 V	550 V
Maximal discharge current (8/20) Imax			15 kA	40 kA	40 kA
Nominal discharge current (8/20) In			5 kA	20 kA	10 kA
Voltage protection rating (L-N / N-G / L-G) VPR			1 kV	1 kV	1.7 kV
Response time			< 25 ns	< 25 ns	< 25 ns
Short circuit withstand	SCCR		200 kA	200 kA	200 kA
Back up protection maximum rating	fuse (gG - gL)		≤ 100 A	≤ 100 A	≤ 100 A
	circuit breaker (B or C curve)		≤ 125 A	≤ 125 A	≤ 125 A
Pluggable cartridges			Yes	Yes	Yes
Integrated QuickSafe® technology			Yes	Yes	Yes
State indicator			Yes	Yes	Yes
Safety reserve			–	–	–
Auxiliary contact (TS)			No	Yes	Yes
Installation					
Wire range (L,N,PE)	solid wire		2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²
	stranded wire		2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²
Stripping length (L,N,PE)			12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm
Tightening torque (L,N,PE)			2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm
Auxiliary contact (TS)					
Contact information			–	3 NO – 3 NC	3 NO – 3 NC
Min. load			–	12 V DC – 10 mA	12 V DC – 10 mA
Max. load			–	250 V AC – 1 A	250 V AC – 1 A
Connection cross section			–	1.5 / 16 mm²	1.5 / 16 mm²
Miscellaneous characteristics					
Stocking temperature			-40...+80 °C	-40...+80 °C	-40...+80 °C
Maximal Altitude			5 000 m	5 000 m	5 000 m
Operating temperature			-40...+176 °F	-40...+176 °F	-40...+176 °F
Degree of protection			NEMA 1	NEMA 1	NEMA 1
Fire resistance according to UL 94			V0	V0	V0
Dimensions	mm	h x w x d	90.5 x 53.4 x 64.8 mm	–	–
	inches	h x w x d	3.56 x 2.1 x 2.55 in	–	–
Dimensions with auxiliary contact (TS)	mm	h x w x d	–	98.5 x 53.4 x 64.8 mm	98.5 x 53.4 x 64.8 mm
	inches	h x w x d	–	3.88 x 2.1 x 2.55 in	3.88 x 2.1 x 2.55 in
Replacement cartridges					
Phase product ID	Type		OVR T2 15-320 C U	OVR T2 40-320 C U	OVR T2 40-550 C U
	Order code		2CTB802348R2700	2CTB802348R3700	2CTB802348R4100
Neutral product ID	Type		–	–	–
	Order code		–	–	–

Protection and safety

OVR Type 2 surge protective devices - Split phase networks

OVR T2 2L 15-320 P U

Description

Split phase devices are composed by two MOV poles or two MOV poles plus a spark gap one, depending on the number of lines the customer wants to pretect.The spark gap pole guarantees the lowest voltage protection rating and has to be connected to the neutral.
OVR T2 devices provide the best protection as they are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (VPR). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

OVR T2 2L 40-320 P TS U

OVR T2 2N 15-320 P U

OVR T2 2N 40-440 P TS U

Ordering details

Protected lines	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection rating VPR	Nominal voltage Un	Max. cont. operating voltage MCOV, Uc	Bbn 3660308	Order details		Weight Pkg (1 pce)
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
Pluggable									
2	15	5	0.6	120 ±15%	175	518590	OVR T2 2L 15-150 P U	2CTB802343R0000	0.24
2	15	5	1	277 ±15%	320	518606	OVR T2 2L 15-320 P U	2CTB802343R0400	0.24
2	40	20	0.6	120 ±15%	175	518613	OVR T2 2L 40-150 P TS U	2CTB802343R2100	0.24
2	40	20	1	277 ±15%	320	518620	OVR T2 2L 40-320 P TS U	2CTB802343R2500	0.24
3	15	5	0.7	120 ±15%	175	519306	OVR T2 2N 15-150 P U	2CTB802344R0000	0.36
3	15	5	1.1	277 ±15%	320	519313	OVR T2 2N 15-320 P U	2CTB802344R0400	0.36
3	40	20	0.7	120 ±15%	175	519320	OVR T2 2N 40-150 P TS U	2CTB802344R2100	0.36
3	40	20	1.1	277 ±15%	320	519337	OVR T2 2N 40-320 P TS U	2CTB802344R2500	0.36
3	40	10	1.4	347 ±15%	440	519344	OVR T2 2N 40-440 P TS U	2CTB802344R2900	0.36
3	40	10	1.8	480 ±15%	550	519351	OVR T2 2N 40-550 P TS U	2CTB802344R3300	0.36
3	40	10	2	600 ±15%	660	519368	OVR T2 2N 40-660 P TS U	2CTB802344R3700	0.36

Protection and safety

OVR Type 2 surge protective devices - Grounded Wye networks

OVR T2 3L 40-440 P TS U

Description

Wye devices are composed by three MOV poles or three MOV poles plus a spark gap one, depending on the number of lines the customer wants to protect. The spark gap pole guarantees the lowest voltage protection rating and has to be connected to the Neutral.
OVR T2 devices provide the best protection as they are designed to protect electric installations and sensitive equipment against indirect surges with ensuring a low protection level (VPR). They are characterized by their capacity to safely discharge current with 8/20 µs wave form.

Ordering details

Protected lines	Max discharge current Imax 8/20	Nominal discharge current In	Voltage protection rating VPR	Nominal voltage Un	Max. cont. operating voltage MCOV, Uc	Bbn 3660308	Order details		Weight Pkg (1 pce)
	kA	kA	kV	V	V	EAN	Type code	Order code	kg
Pluggable									
3	15	5	0.6	120 ±15%	175	518637	OVR T2 3L 15-150 P U	2CTB802345R0000	0.36
3	40	20	0.6	120 ±15%	175	518651	OVR T2 3L 40-150 P TS U	2CTB802345R2100	0.36
4	15	5	1.2	120 ±15%	175	518699	OVR T2 3N 15-150 P U	2CTB802346R0000	0.48
4	15	5	1.2	277 ±15%	320	518705	OVR T2 3N 15-320 P U	2CTB802346R0400	0.48
4	40	20	1.2	120 ±15%	175	518712	OVR T2 3N 40-150 P TS U	2CTB802346R2100	0.48
4	40	20	1.2	277 ±15%	320	518729	OVR T2 3N 40-320 P TS U	2CTB802346R2500	0.48
4	40	10	1.2	347 ±15%	440	518736	OVR T2 3N 40-440 P TS U	2CTB802346R2900	0.48
4	40	10	1.2	480 ±15%	550	518743	OVR T2 3N 40-550 P TS U	2CTB802346R3300	0.48
4	40	10	1.2	600 ±15%	660	518750	OVR T2 3N 40-660 P TS U	2CTB802346R3700	0.48

Protection and safety

OVR Type 2 surge protective devices - Split phase networks

General technical data

Type			**OVR T2 2L 15-150 P U**	**OVR T2 2L 15-320 P U**	**–**	**–**	**OVR T2 2N 15-150 P U**
with auxiliary contact (TS)			**–**	**–**	**OVR T2 2L 40-150 P TS U**	**OVR T2 2L 40-320 P TS U**	**–**
Electrical features							
Standards			UL 1449	UL 1449	UL 1449	UL 1449	UL 1449
Type / test class (UL 1449)			1	1	1	1	4
Protected lines			2	2	2	2	3
Type of current / frequency			AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			±15%	±15%	±15%	±15%	±15%
Nominal system voltage Un			120 V	277 V	120 V	277 V	120 V
Maximum continuous operating voltage MCOV			175 V	320 V	175 V	320 V	175 V
Maximal discharge current (8/20) Imax			15 kA	15 kA	40 kA	40 kA	15 kA
Nominal discharge current (8/20) In			5 kA	5 kA	20 kA	20 kA	5 kA
Voltage protection rating (L-N / N-G / L-G) VPR			0.6 kV	1 kV	0.6 kV	1 kV	0.7 kV
Response time			< 25 ns	< 25 ns	< 25 ns	< 25 ns	< 25 ns
Short circuit withstand SCCR			200 kA	200 kA	200 kA	200 kA	200 kA
Back up protection maximum rating	fuse (gG - gL)		≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A
	circuit breaker (B or C curve)		≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A
Pluggable cartridges			Yes	Yes	Yes	Yes	Yes
Integrated QuickSafe® technology			Yes	Yes	Yes	Yes	Yes
State indicator			Yes	Yes	Yes	Yes	Yes
Safety reserve			–	–	–	–	–
Auxiliary contact (TS)			No	No	Yes	Yes	No
Installation							
Wire range (L,N,PE)	solid wire		2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²
	stranded wire		2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²
Stripping length (L,N,PE)			12.5 / 0.5	12.5 / 0.5	12.5 / 0.5	12.5 / 0.5	12.5 / 0.5
Tightening torque (L,N,PE)			2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm
Auxiliary contact (TS)							
Contact information			–	–	2 NO – 2 NC	2 NO – 2 NC	–
Min. load			–	–	12 V DC – 10 mA	12 V DC – 10 mA	–
Max. load			–	–	250 V AC – 1 A	250 V AC – 1 A	–
Connection cross section			–	–	1.5 / 16 mm²	1.5 / 16 mm²	–
Miscellaneous characteristics							
Stocking temperature			-40...+80 °C	-40...+80 °C	-40...+80 °C	-40...+80 °C	-40...+80 °C
Maximal Altitude			5 000 m	5 000 m	5 000 m	5 000 m	5 000 m
Operating temperature			-40...+176 °F	-40...+176 °F	-40...+176 °F	-40...+176 °F	-40...+176 °F
Degree of protection			NEMA 1	NEMA 1	NEMA 1	NEMA 1	NEMA 1
Fire resistance according to UL 94			V0	V0	V0	V0	V0
Dimensions	mm	h x w x d	90.5 x 35.6 x 64.8 mm	90.5 x 35.6 x 64.8 mm	–	–	90.5 x 53.4 x 64.8 mm
	inches	h x w x d	3.56 x 1.4 x 2.55 in	3.56 x 1.4 x 2.55 in	–	–	3.56 x 2.1 x 2.55 in
Dimensions with auxiliary contact (TS)	mm	h x w x d	–	–	98.5 x 35.6 x 64.8 mm	98.5 x 35.6 x 64.8 mm	–
	inches	h x w x d	–	–	3.88 x 1.4 x 2.55 in	3.88 x 1.4 x 2.55 in	–
Replacement cartridges			**–**	**–**	**–**	**–**	**–**
Phase product ID	Type		OVR T2 15-150 C U	OVR T2 15-320 C U	OVR T2 40-150 C U	OVR T2 40-320 C U	OVR T2 15-150 C U
	Order code		2CTB802348R2500	2CTB802348R2700	2CTB802348R3500	2CTB802348R3700	2CTB802348R2500
Neutral product ID	Type		–	–	–	–	OVR T2 70 N C U
	Order code		–	–	–	–	2CTB802348R6500

Protection and safety

OVR Type 2 surge protective devices - Split phase networks

OVR T2 2N 15-320 P U	–	–	–	–	–
–	**OVR T2 2N 40-150 P TS U**	**OVR T2 2N 40-320 P TS U**	**OVR T2 2N 40-440 P TS U**	**OVR T2 2N 40-550 P TS U**	**OVR T2 2N 40-660 P TS U**
UL 1449	UL 1449	UL 1449	UL 1449	UL 1449	UL 1449
4	4	4	4	4	4
3	3	3	3	3	3
AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
±15%	±15%	±15%	±15%	±15%	±15%
277 V	120 V	277 V	347 V	480 V	600 V
320 V	175 V	320 V	440 V	550 V	660 V
15 kA	40 kA	40 kA	40 kA	40 kA	40 kA
5 kA	20 kA	20 kA	10 kA	10 kA	10 kA
1.1 kV	0.7 kV	1.1 kV	1.4 kV	1.8 kV	2 kV
< 25 ns	< 25 ns	< 25 ns	< 25 ns	< 25 ns	< 25 ns
200 kA	200 kA	200 kA	200 kA	200 kA	200 kA
≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A
≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A
Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes
–	–	–	–	–	–
No	Yes	Yes	Yes	Yes	Yes
2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²
2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²
12.5 / 0.5	12.5 / 0.5	12.5 / 0.5	12.5 / 0.5	12.5 / 0.5	12.5 / 0.5
2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm
–	3 NO – 3 NC	3 NO – 3 NC	3 NO – 3 NC	3 NO – 3 NC	3 NO – 3 NC
–	12 V DC – 10 mA	12 V DC – 10 mA	12 V DC – 10 mA	12 V DC – 10 mA	12 V DC – 10 mA
–	250 V AC – 1 A	250 V AC – 1 A	250 V AC – 1 A	250 V AC – 1 A	250 V AC – 1 A
–	1.5 / 16 mm²	1.5 / 16 mm²	1.5 / 16 mm²	1.5 / 16 mm²	1.5 / 16 mm²
-40…+80 °C	-40…+80 °C	-40…+80 °C	-40…+80 °C	-40…+80 °C	-40…+80 °C
5 000 m	5 000 m	5 000 m	5 000 m	5 000 m	5 000 m
-40…+176 °F	-40…+176 °F	-40…+176 °F	-40…+176 °F	-40…+176 °F	-40…+176 °F
NEMA 1	NEMA 1	NEMA 1	NEMA 1	NEMA 1	NEMA 1
V0	V0	V0	V0	V0	V0
90.5 x 53.4 x 64.8 mm	–	–	–	–	–
3.56 x 2.1 x 2.55 in	–	–	–	–	–
–	98.5 x 53.4 x 64.8 mm	98.5 x 53.4 x 64.8 mm	98.5 x 53.4 x 64.8 mm	98.5 x 53.4 x 64.8 mm	98.5 x 53.4 x 64.8 mm
–	3.88 x 2.1 x 2.55 in	3.88 x 2.1 x 2.55 in	3.88 x 2.1 x 2.55 in	3.88 x 2.1 x 2.55 in	3.88 x 2.1 x 2.55 in
–	**1 NO – 1 NC**	**1 NO – 1 NC**	**1 NO – 1 NC**	**1 NO – 1 NC**	**1 NO – 1 NC**
OVR T2 15-320 C U	OVR T2 40-150 C U	OVR T2 40-320 C U	OVR T2 40-440 C U	OVR T2 40-550 C U	OVR T2 40-660 C U
2CTB802348R2700	2CTB802348R3500	2CTB802348R3700	2CTB802348R3900	2CTB802348R4100	2CTB802348R4300
OVR T2 70 N C U	OVR T2 70 N C U	OVR T2 70 N C U	OVR T2 70 N C U	OVR T2 70 N C U	OVR T2 70 N C U
2CTB802348R6500	2CTB802348R6500	2CTB802348R6500	2CTB802348R6500	2CTB802348R6500	2CTB802348R6500

Protection and safety

OVR Type 2 surge protective devices - Grounded Wye networks

General technical data

Type			**OVR T2 3L 15-150 P U**	**–**	**OVR T2 3N 15-150 P U**	**OVR T2 3N 15-320 P U**
with auxiliary contact (TS)			**–**	**OVR T2 3L 40-150 P TS U**	**–**	**–**
Electrical features						
Standards			UL 1449	UL 1449	UL 1449	UL 1449
Type / test class (UL 1449)			1	1	4	4
Protected lines			3	3	4	4
Type of current / frequency			AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
Voltage regulation of the system network			±15%	±15%	±15%	±15%
Nominal system voltage Un			120 V	120 V	120 V	277 V
Maximum continuous operating voltage MCOV			175 V	175 V	175 V	320 V
Maximal discharge current (8/20) Imax			15 kA	40 kA	15 kA	15 kA
Nominal discharge current (8/20) In			5 kA	10 kA	5 kA	5 kA
Voltage protection rating (L-N / N-G / L-G VPR)			0.6 kV	0.6 kV	0.6 kV	1 kV
Response time			< 25 ns	< 25 ns	< 25 ns	< 25 ns
Short circuit withstand	SCCR		200 kA	200 kA	200 kA	200 kA
Back up protection maximum rating	fuse (gG - gL)		≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A
	circuit breaker (B or C curve)		≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A
Pluggable cartridges			Yes	Yes	Yes	Yes
Integrated QuickSafe® technology			Yes	Yes	Yes	Yes
State indicator			Yes	Yes	Yes	Yes
Safety reserve			–	–	–	–
Auxiliary contact (TS)			No	Yes	No	No
Installation						
Wire range (L,N,PE)	solid wire		2.5...25 / 4...14 mm²	2.5...25 / 4...14 mm²	2.5...25 / 4...14 mm²	2.5...25 / 4...14 mm²
	stranded wire		2.5...16 / 6...14 mm²	2.5...16 / 6...14 mm²	2.5...16 / 6...14 mm²	2.5...16 / 6...14 mm²
Stripping length (L,N,PE)			12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm
Tightening torque (L,N,PE)			2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm
Auxiliary contact (TS)						
Contact information			–	4 NO – 4 NC	–	–
Min. load			–	12 V DC – 10 mA	–	–
Max. load			–	250 V AC – 1 A	–	–
Connection cross section			–	1.5 / 16 mm²	–	–
Miscellaneous characteristics						
Stocking temperature			-40...+80 °C	-40...+80 °C	-40...+80 °C	-40...+80 °C
Maximal Altitude			5 000 m	5 000 m	5 000 m	5 000 m
Operating temperature			-40...+176 °F	-40...+176 °F	-40...+176 °F	-40...+176 °F
Degree of protection			NEMA 1	NEMA 1	NEMA 1	NEMA 1
Fire resistance according to UL 94			V0	V0	V0	V0
Dimensions	mm	h x w x d	90.5 x 53.4 x 64.8 mm	–	90.5 x 71.2 x 64.8 mm	90.5 x 71.2 x 64.8 mm
	inches	h x w x d	3.56 x 2.1 x 2.55 in	–	3.56 x 2.8 x 2.55 in	3.56 x 2.8 x 2.55 in
Dimensions with auxiliary contact (TS)	mm	h x w x d	–	98.5 x 53.4 x 64.8 mm	–	–
	inches	h x w x d	–	3.88 x 2.1 x 2.55 in	–	–
Replacement cartridges						
Phase product ID	Type		OVR T2 15-150 C U	OVR T2 40-150 C U	OVR T2 15-150 C U	OVR T2 15-320 C U
	Order code		2CTB802348R2500	2CTB802348R3500	2CTB802348R2500	2CTB802348R2700
Neutral product ID	Type		–	–	OVR T2 70 N C U	OVR T2 70 N C U
	Order code		–	–	2CTB802348R6500	2CTB802348R6500

Protection and safety

OVR Type 2 surge protective devices - Grounded Wye networks

–	–	–	–	–	–
OVR T2 3N 40-150 P TS U	**OVR T2 3N 40-320 P TS U**	**OVR T2 3N 40-320 P TS U**	**OVR T2 3N 40-440 P TS U**	**OVR T2 3N 40-550 P TS U**	**OVR T2 3N 40-660 P TS U**
UL 1449	UL 1449	UL 1449	UL 1449	UL 1449	UL 1449
4	4	4	4	4	4
4	4	4	4	4	4
AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz	AC 47-63 Hz
±15%	±15%	±15%	±15%	±15%	±15%
120 V	277 V	277 V	347 V	480 V	600 V
175 V	320 V	320 V	440 V	550 V	660 V
40 kA	40 kA	40 kA	40 kA	40 kA	40 kA
20 kA	20 kA	20 kA	10 kA	10 kA	10 kA
1.2 kV	1.2 kV	1.2 kV	1.2 kV	1.2 kV	1.2 kV
< 25 ns	< 25 ns	< 25 ns	< 25 ns	< 25 ns	< 25 ns
200 kA	200 kA	200 kA	200 kA	200 kA	200 kA
≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A	≤ 100 A
≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A	≤ 125 A
Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes
–	–	–	–	–	–
Yes	Yes	Yes	Yes	Yes	Yes
2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²	2.5…25 / 4…14 mm²
2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²	2.5…16 / 6…14 mm²
12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm	12.5 / 0.5 mm
2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm	2.8 / 24.5 Nm
4 NO – 4 NC	4 NO – 4 NC	4 NO – 4 NC	4 NO – 4 NC	4 NO – 4 NC	4 NO – 4 NC
12 V DC – 10 mA	12 V DC – 10 mA	12 V DC – 10 mA	12 V DC – 10 mA	12 V DC – 10 mA	12 V DC – 10 mA
250 V AC – 1 A	250 V AC – 1 A	250 V AC – 1 A	250 V AC – 1 A	250 V AC – 1 A	250 V AC – 1 A
1.5 / 16 mm²	1.5 / 16 mm²	1.5 / 16 mm²	1.5 / 16 mm²	1.5 / 16 mm²	1.5 / 16 mm²
-40...+80 °C	-40...+80 °C	-40...+80 °C	-40...+80 °C	-40...+80 °C	-40...+80 °C
5 000 m	5 000 m	5 000 m	5 000 m	5 000 m	5 000 m
-40...+176 °F	-40...+176 °F	-40...+176 °F	-40...+176 °F	-40...+176 °F	-40...+176 °F
NEMA 1	NEMA 1	NEMA 1	NEMA 1	NEMA 1	NEMA 1
V0	V0	V0	V0	V0	V0
–	–	–	–	–	–
–	–	–	–	–	–
98.5 x 71.2 x 64.8 mm	98.5 x 71.2 x 64.8 mm	98.5 x 71.2 x 64.8 mm	98.5 x 71.2 x 64.8 mm	98.5 x 71.2 x 64.8 mm	98.5 x 71.2 x 64.8 mm
3.88 x 2.8 x 2.55 in	3.88 x 2.8 x 2.55 in	3.88 x 2.8 x 2.55 in	3.88 x 2.8 x 2.55 in	3.88 x 2.8 x 2.55 in	3.88 x 2.8 x 2.55 in
OVR T2 40-150 C U	OVR T2 40-320 C U	OVR T2 40-320 C U	OVR T2 40-440 C U	OVR T2 40-550 C U	OVR T2 40-660 C U
2CTB802348R3500	2CTB802348R3700	2CTB802348R3700	2CTB802348R3900	2CTB802348R4100	2CTB802348R4300
OVR T2 70 N C U	OVR T2 70 N C U	OVR T2 70 N C U	OVR T2 70 N C U	OVR T2 70 N C U	OVR T2 70 N C U
2CTB802348R6500	2CTB802348R6500	2CTB802348R6500	2CTB802348R6500	2CTB802348R6500	2CTB802348R6500

OVRH UL version
Product range overview

Name	OVRHTP	OVRHMSU	OVRHT3D
Connection ampacity	4000 and below	24 A	400 A and below
SPDtype	Type 1 and Type 2	Type 4 for Type 2	Type 1
Certifications	UL 1449	UL 1449	UL 1449
Surge ratings	60, 80, 100, 120, 160, 200, 240, 300, 400 kA per phase	50kA per phase	50kA per phase
LEDs	Yes	Yes	Yes
Dry relay contacts	Standard	Not available	Not available
EM Ifilter	Optional	Yes	Not available
Surge counter	Optional	Not available	Not available
Warranty	10 years	5 years	3 years

Notes

OVRHTP series
OVRHTP (60 to 200 kA)

Product features

- UL Listed 1449 5th Edition for Type 1 and Type 2
- SPD applications
- Thermally protected MOVs provide superior protection and continuous operation
- 200 kAIC short circuit current rating allows direct bus connection without the need for an upstream over-current protection device
- UL 1283 EMI/RF filter available as an option
- Compact and lightweight design
- 10-year standard warranty

c UL US LISTED RoHS Compliant

kA rating | **Configuration** | **Monitoring**

O V R H T P 0 6 0 2 2 0 3 Y P U 4

Model | **Voltage** | **Enclosure** | **Filter**

kA rating	Suffix
60 kA per phase, 30 kA per mode	060
80 kA per phase, 40 kA per mode	080
100 kA per phase, 50 kA per mode	100
120 kA per phase, 60 kA per mode	120
160 kA per phase, 80 kA per mode	160
200 kA per phase, 100 kA per mode	200

Voltage and configuration (must choose one)	Suffix
120 V, 1-phase, 2-wire + ground	1201P
127 V, 1-phase, 2-wire + ground	1271P
220 V, 1-phase, 2-wire + ground	2201P
230 V, 1-phase, 2-wire + ground	2301P
240 V, 1-phase, 2-wire + ground	2401P
277 V, 1-phase, 2-wire + ground	2771P
240/120 V, 2-phase, 3-wire + ground	1202S
480/240 V, 2-phase, 3-wire + ground	2402S
240Δ /120 V, 3-phase high-leg , 4-wire + ground	1203H
208Y/120 V, 3-phase Wye, 4-wire + ground	1203Y
380Y/220 V, 3-phase Wye, 4-wire + ground	2203Y
400Y/230 V, 3-phase Wye, 4-wire + ground	2303Y
415Y/240 V, 3-phase Wye, 4-wire + ground	2403Y
480Y/277 V, 3-phase Wye, 4-wire + ground	2773Y
600Y/347 V, 3-phase Wye, 4-wire + ground	3473Y
208 V, 3-phase Delta, 3-wire + ground	2083D
240 V, 3-phase Delta, 3-wire + ground	2403D
415 V, 3-phase Delta, 3-wire + ground	4153D
480 V, 3-phase Delta, 3-wire + ground	4803D
600 V, 3-phase Delta, 3-wire + ground	6003D
1-phase, 2-wire + ground (for TNC grounding systems)	2301PI
1-phase, 2-wire + ground (for TNS grounding systems)	2301PJ
1-phase, 2-wire + ground (for IT grounding systems)	2301PK
1-phase, 2-wire + ground (for TT grounding systems)	2301P

Enclosure option	Suffix
Fiberglass-reinforced polyester, NEMA 4X	P
Powder-coated metal NEMA 4	4
Stainless steel NEMA 4X	S

Monitoring option (must choose one)	Suffix
Status indicator LED lights (one per phase)	B
Status indicator LED lights (one per phase), dry relay contacts, audible alarm with silence button, fault light	U
Status indicator LED lights (one per phase), surge counter, dry relay contacts, audible alarm with silence button, fault light	UE

(only available in 120, 160, 200 kA per phase)

Filter option	Suffix
4 UF filter	4
UL 1283 filter (making device Type 2)	4T2
No filter	0

For UL 1283 approved filter - T2 must be at the end of the part number. For example OVRHTP0602203YPU4T2

Product specifications

Electrical		
60 kA per phase, 30 kA per mode		
80 kA per phase, 40 kA per mode		
100 kA per phase, 50 kA per mode		
120 kA per phase, 60 kA per mode		
160 kA per phase, 80 kA per mode		
200 kA per phase, 100 kA per mode		
Maximum surge current rating		XX kA per phase, XX kA per mode
Nominal discharge current rating (L-N)		20 kA Earthing and Delta systems 10 kA
Operating frequency		47–63 Hz
Connection method		Pre-wired with 36 inches of #10 AWG conductor
Modes of protection		All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)		200 kAIC — no upstream over-current protection device (breaker or fuse) required
Application		ANSI/IEEE C62.41.1 locations A, B and C ideal for distribution panels, branch panels and critical loads

Mechanical		
Installation location		Indoor or outdoor
Mounting method		Dual mounting flanges
Operating environment	-40 °F to 149 °F (-40 °C to +65 °C)	5%–95% non-condensing humidity
Altitude		0–12,000 ft (3.66 km)
Product design		Individual thermally fused MOV technology

EMI/RFI filter attenuation	
Mil Standard 220B	Up to 40 dB from 10 kHz to 100 MHz

Regulatory	
cULus 1449 5th Edition	VZCA: E316636 Type 1
UL 1283 with filter option	Yes
UL96A compliant	Yes
IEEE C62.41.2, C62.45	Yes
NFPA 70 (NEC), Article 285	Yes
RoHs compliant	Yes
Listed by	UL

Warranty	**10 years**

OVRHTP series

OVRHTP (240 to 400 kA)

Product features

- UL Listed 1449 5th Edition for Type 1 and Type 2
- SPD applications
- Thermally protected MOVs provide superior protection and continuous operation
- 200 kAIC short circuit current rating allows direct bus connection without the need for an upstream over-current protection device
- UL 1283 EMI/RF filter available as an option
- Compact and lightweight design
- 10-year standard warranty

c UL US LISTED

RoHS Compliant

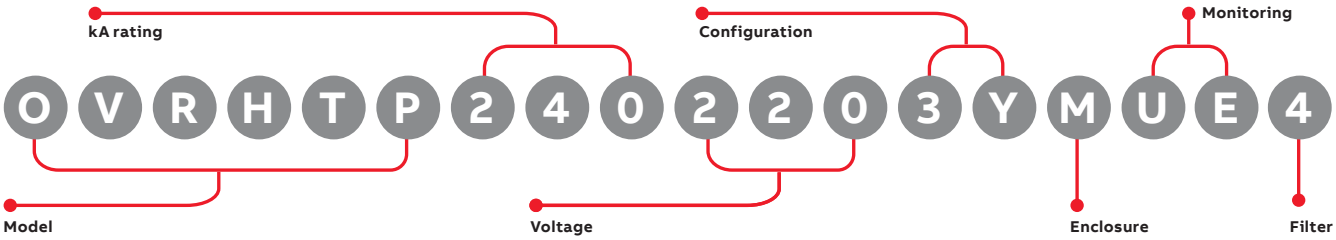

kA rating	Suffix
240 kA per phase, 120 kA per mode	240
300 kA per phase, 150 kA per mode	300
400 kA per phase, 200 kA per mode	400

Enclosure option	Suffix
Fiberglass-reinforced polyester with termination lugs	PL
Powder-coated metal NEMA 4 with termination lugs	4L
Stainless steel NEMA 4X with termination lug	SL

Voltage and configuration (must choose one)	Suffix
120 V, 1-phase, 2-wire + ground	1201P
127 V, 1-phase, 2-wire + ground	1271P
220 V, 1-phase, 2-wire + ground	2201P
230 V, 1-phase, 2-wire + ground	2301P
240 V, 1-phase, 2-wire + ground	2401P
277 V, 1-phase, 2-wire + ground	2771P
240/120 V, 2-phase, 3-wire + ground	1202S
480/240 V, 2-phase, 3-wire + ground	2402S
240Δ /120 V, 3-phase high-leg , 4-wire + ground	1203H
208Y/120 V, 3-phase Wye, 4-wire + ground	1203Y
380Y/220 V, 3-phase Wye, 4-wire + ground	2203Y
400Y/230 V, 3-phase Wye, 4-wire + ground	2303Y
415Y/240 V, 3-phase Wye, 4-wire + ground	2403Y
480Y/277 V, 3-phase Wye, 4-wire + ground	2773Y
600Y/347 V, 3-phase Wye, 4-wire + ground	3473Y
208 V, 3-phase Delta, 3-wire + ground	2083D
240 V, 3-phase Delta, 3-wire + ground	2403D
415 V, 3-phase Delta, 3-wire + ground	4153D
480 V, 3-phase Delta, 3-wire + ground	4803D
600 V, 3-phase Delta, 3-wire + ground	6003D

Monitoring option (must choose one)	Suffix
Status indicator LED lights (one per phase)	B
Status indicator LED lights (one per phase), dry relay contacts, audible alarm with silence button, fault light	U
Status indicator LED lights (one per phase), surge counter, dry relay contacts, audible alarm with silence button, fault light	UE

Filter option	Suffix
4 UF filter	4
UL 1283 filter (making device Type 2)	4T2
No filter	0

For UL 1283 approved filter - T2 must be at the end of the part number. For example OVRHTP0602203YPU4T2

Product specifications

Electrical	
240 kA per phase, 120 kA per mode	
300 kA per phase, 150 kA per mode	
400 kA per phase, 200 kA per mode	
Maximum surge current rating	XX kA per phase, XX kA per mode
Nominal discharge current rating (L-N)	20 kA Earthing and Delta systems 10 kA
Operating frequency	47–63 Hz
Connection method	Termination lugs for #10–#4 AWG conductor (PL, ML or SL enclosure suffix)
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	200 kAIC — no upstream over-current protection device (breaker or fuse) required
Application	ANSI/IEEE C62.41.1 locations A, B and C ideal for distribution panels, branch panels and critical loads

Mechanical		
Installation location		Indoor or outdoor
Mounting method		Dual mounting flanges
Operating environment	-40 °F to 149 °F (-40 °C to +65 °C)	5%–95% non-condensing humidity
Altitude		0–12,000 ft (3.66 km)
Product design		Individual thermally fused MOV technology

EMI/RFI filter attenuation	
Mil Standard 220B	Up to 40 dB from 10 kHz to 100 MHz

Regulatory	
cULus 1449 5th Edition	VZCA: E316636 Type 1
UL 1283 with filter option	Yes
UL96A compliant	Yes
IEEE C62.41.2, C62.45	Yes
NFPA 70 (NEC), Article 285	Yes
RoHs compliant	Yes
Listed by	UL

Warranty	**10 years**

Protection and safety

OVRHT3D

- UL listed 1449 5th Edition for Type 1 SPD applications
- 50 kA per phase protection
- Individual thermally fused and protected MOVs
- Includes pre-wired pigtail conductors
- Multiple MOVs per phase eliminate single-point failure

Technical features

Electrical	
Maximum surge current	50 kA per phase
UL type designation	Type 1
UL 1449 nominal discharge current rating (I-n)	20 kA
UL 1449 fault rating/short circuit current rating (SCCR)	200 kAIC
Design specifications	
Product design	Individual thermally fused and protected MOVs
Connection methods	External parallel connected for mounting next to electrical gear
Typical connection	18” #12 AWG (pre-wired pig tails)
Technical data	
Humidity range	0–95% non-condensing
Operating environment	-35 °C to +85 °C (-31 °F to +185 °F)
Operating frequency	50–60 Hz
Modes of protection	See performance data
Enclosure	
Enclosure type	Polycarbonate, NEMA 4X
Installation location	Indoor/outdoor
Mounting method	12.7 mm (½”) NPT side-mount nipple
Size specifications	
Dimensions	4.25” × 2.41” × 2.75”
Weight	0.23 kg (0.5 lb.)
Diagnostic and status monitoring specifications	
LED protection status monitoring standard	Status indicator light, 1 per phase

Standards compliance and certifications

UL 1449 5th Edition: 2021, cULus, (UL File: VZCA E316636), ANSI/IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, NEC Article 285
ISO 9001: 2014 quality management system, ISO 17025:2007 laboratory certification (UL DAP program) compliance with RoHS, REACH and California Prop 65
100% quality tested prior to shipping

Protection and safety
OVRHT3D

Ordering information

Model number	Global product ID	Voltage	Configuration	MOQ
OVRHT3D501202S	2CJC705120S0000	240/120 V	2-phase, 3-wire + ground	1
OVRHT3D501203Y	2CJC705120Y0000	208/120 V	3-phase Wye, 4-wire + ground	1
OVRHT3D502773Y	2CJC705277Y0000	480/240 V	3-phase Wye, 4-wire + ground	1
OVRHT3D504803D	2CJC705480D0000	480 V	3-phase Delta, 3-wire + ground	1
Special order				
OVRHT3D502203Y	2CJC705220Y0000	380/220 V	3-phase Wye, 4-wire + ground	12
OVRHT3D502201P	2CJC705220P0000	220 V	1-phase, 2-wire + ground	12
OVRHT3D502301P	2CJC705230P0000	230 V	1-phase, 2-wire + ground	12
OVRHT3D503471P	2CJC705347P0000	347 V	1-phase, 2-wire + ground	12
OVRHT3D502402S	2CJC705240S0000	480/240 V	2-phase, 3-wire + ground	12
OVRHT3D502303Y	2CJC705230Y0000	400/230 V	3-phase Wye, 4-wire + ground	12
OVRHT3D502403Y	2CJC705240Y0000	415/240 V	3-phase Wye, 4-wire + ground	12
OVRHT3D503473Y	2CJC705347Y0000	600/347 V	3-phase Wye, 4-wire + ground	12
OVRHT3D502403H	2CJC705240H0000	240/120 V	3-phase Delta high-leg, 4-wire + ground	12
OVRHT3D502401P	2CJC705240P0000	240 V	1-phase, 2-wire + ground	12
OVRHT3D502771P	2CJC705277P0000	277 V	1-phase, 2-wire + ground	12
OVRHT3D502403D	2CJC705240D0000	240 V	3-phase Delta, 3-wire + ground	12
OVRHT3D503803D	2CJC705380D0000	380 V	3-phase Delta, 3-wire + ground	12
OVRHT3D501201P	2CJC705120P0000	120 V	1-phase, 2-wire + ground	12
OVRHT3D504003D	2CJC705400D0000	400 V	3-phase Delta, 3-wire + ground	12
OVRHT3D506003D	2CJC705600D0000	600 V	3-phase Delta, 3-wire + ground	12

OVRHMSU

Series-Connected Suppression Filter System

The OVRHMSU is engineered for hard-wired installation within or adjacent to electrical loads such as outdoor lighting, robotics, process automation systems, motors, HVAC systems, pumps, heaters, programmable logic controllers and other point-of-use applications. Compact and powerful, the OVRHMSU protects these and other individual components from damaging electrical transients, high-frequency noise and high-energy disturbances. OVRHMSU provides 50kA of surge protection for loads up to 24 amps.

Product Specifications

General Specifications	
Maximum Surge Current Rating	50kA Per Mode
Voltage (Single-Phase Applications)	120, 220 or 277
Voltage (3-Wire + Ground Applications)	220/380 or 277/480
Voltage (Split-Phase Applications)	120/240
Safety Listings	Listed by ETL to UL 1449 5th Edition, Type 4 for Type 2 SPD applications, cUL, and UL 1283 / Compliant to IEEE C62.41.1-2002, C62.41.2-2002 and C62.45-2002 / NFPA 70 [NEC], Article 285 / RoHS Compliant / CE, IEC 61643-11-2011 / EMC Directive 2004/108/EC
Product Design	Individually fused MOVs UL 1283 EMI/RFI filter
Ampacity Rating	24A
Dimensions	5.8”W x 4”H x 1.875”D
Weight	2.25 lbs.
Enclosure Type	Nonmetallic
Operating Environment	-40°F to 140°F (-40°C to 60°C) 5% – 95% Non-Condensing Humidity
Connection Method	Series/in-line; Terminal Block Termination
Connection Means	#8 Screws
Protection Modes	3 or 6
Warranty	5 Years

Protection and safety

OVRHMSU

kA/mode	Voltage*	
50 kA = 050	208	120/240
	240	208Y/120
	380	380Y/220
	480	480Y/277

Configuration*		Load Current	Modes of Protection
1G	1 Phase, Grounded	24 Amp	3 or 6
2G	2 Phase, Grounded, Split Phase		

*Consult factory for additional voltage configurations

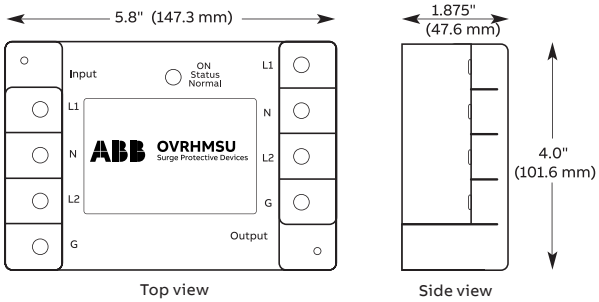

Input Voltages	Phase	Load Current Ratings (A)	Line Frequency Range (Hz)
120V	1	24	50-60
120/240V	Split-Phase	24	50-60
220V	1	24	50-60
220/380V	2	24	50-60
277V	1	24	50-60
277/480V	2	24	50-60

High-frequency noise filtration

Model No.	Voltage	Mode	1KHz	10KHz	100KHz	1MHz	10MHz	100MHz
MSU50-120-1G-24A-3	120	L-N	6 dB	16 dB	42 dB	25 dB	21 dB	36 dB
MSU50-120/240-2G-24A-6	120/240	L-G	6 dB	6 dB	16 dB	55 dB	81 dB	80 dB
MSU50-220-1G-24A-3	220	L-N	6 dB	16 dB	42 dB	25 dB	21 dB	36 dB
MSU50-220/380-2G-24A-6	220/380	L-G	6 dB	6 dB	16 dB	55 dB	81 dB	80 dB
MSU50-277-1G-24A-3	277	L-N	6 dB	16 dB	42 dB	25 dB	21 dB	36 dB
MSU50-277/480-2G-24A-6	277/480	L-G	6 dB	6 dB	8 dB	36 dB	82 dB	81 dB

This table represents select OVRHMSU configurations. Inquire about additional voltages.

OVRHMSU performance data

Model No.	System Voltage (VAC)	Current (A)	Phase 1 or 2	MCOV / UC (V)				VPR / VPL (Up)				
				L-N	L-G	N-G	L-L	L-N	L-G	N-G	L-L	I-n (kA)
MSU50-120-1G-24A-3	120	24A	1	150	300	150	N/A	800	800	800	N/A	20
MSU50-120/240-2G-24A-6	120/240	24A	2	150	300	150	300	800	N/A	800	1200	20
MSU50-220-1G-24A-3	220	24A	1	320	552	320	N/A	1200	1200	1000	N/A	20
MSU50-220/380-2G-24A-6	220/380	24A	2	320	552	320	552	1200	N/A	1000	2000	20
MSU50-277-1G-24A-3	277	24A	1	320	552	320	N/A	1200	1200	1000	N/A	20
MSU50-277/480-2G-24A-6	277/480	24A	2	320	552	320	552	1200	N/A	1000	2000	20

RoHS Compliant

c UL us

OVRHTP series

Dimensions

Dimensions OVRHTP (60 to 100 kA)

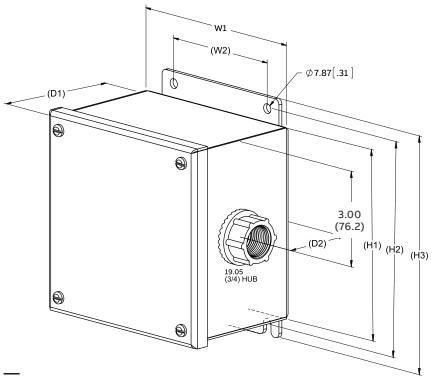

Metal and Stainless Steel Enclosure

Value	Inches / millimeters
H1	6.00 / 152.4
H2	6.75 / 171.5
H3	7.5 /190.5
W1	6.00 / 152.4
W2	4.00 / 101.6
D1	4.26 / 108.3
D2	2.25 / 57.2

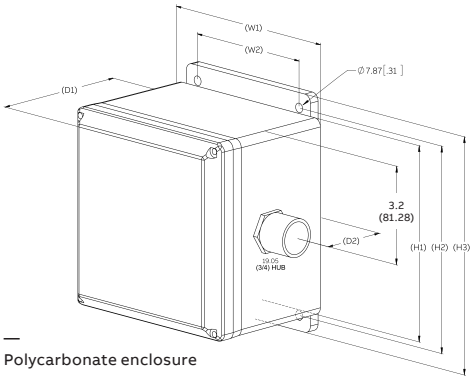

Polycarbonate enclosure

Value	Inches / millimeters
H1	6.42 / 163
H2	6.75 / 171.5
H3	7.75 / 196.9
W1	6.42 / 163
W2	4.50 / 114.3
D1	4.79 / 121.7
D2	2.25 / 57.15

Dimensions OVRHTP (120 to 200 kA)

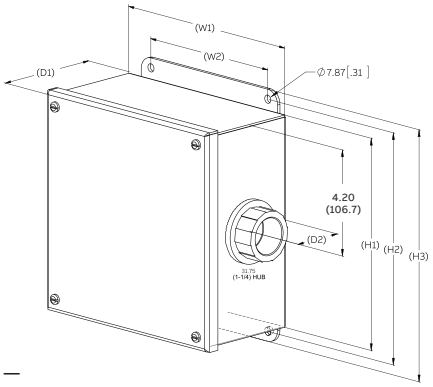

Metal and Stainless Steel Enclosure

Value	Inches / millimeters
H1	8.00 / 203.2
H2	8.75 / 222.3
H3	9.5 / 241.3
W1	8.00 / 203.2
W2	6.00 / 152.4
D1	4.26 / 108.3
D2	2.00 / 50.8

OVRHTP series
Dimensions

Dimensions OVRHTP (120 to 200 kA)

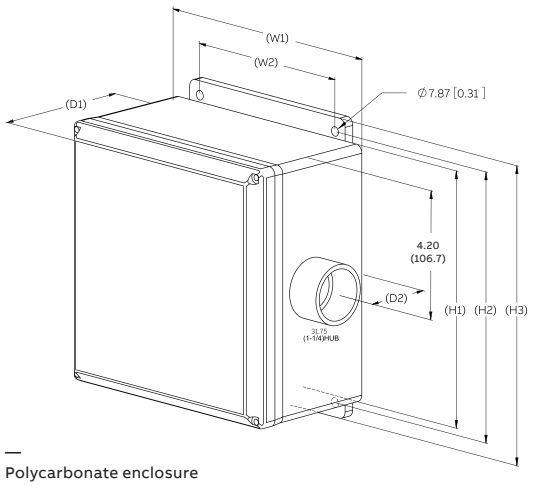

Polycarbonate enclosure

Value	Inches / millimeters
H1	8.42 / 213.9
H2	8.84 / 224.4
H3	9.78 / 248.3
W1	8.42 / 213.9
W2	6.00 / 152.4
D1	4.79 / 121.7
D2	2.25 / 57.2

OVRHTP series
Dimensions

Dimensions OVRHTP (240 to 400 kA)

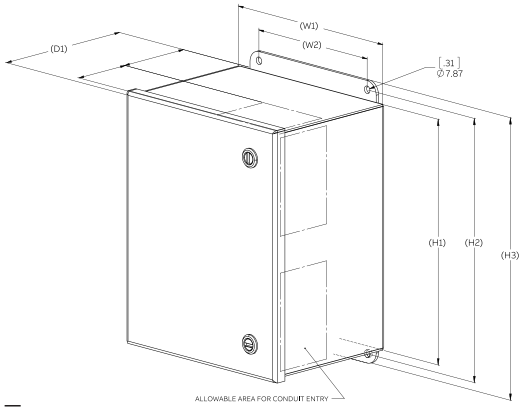

Metal and Stainless Steel Enclosure

H1	10.00 / 254
H2	10.75 / 273.1
H3	11.5 / 292.1
W1	8.00 / 203.2
W2	6.00 / 152.4
D	6.26 / 159.1

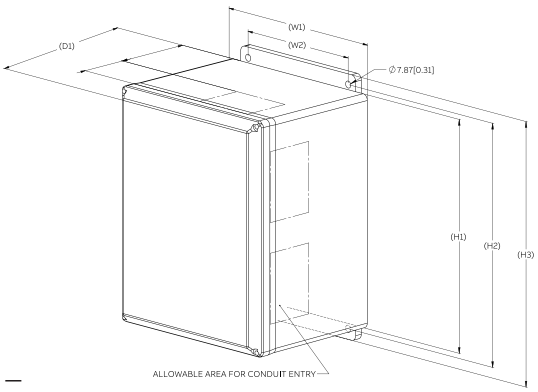

Polycarbonate enclosure

H1	10.35 / 291.9
H2	10.75 / 273.1
H3	11.69 / 296.9
W1	8.35 /212.1
W2	6.00 / 152.4
D	6.79 / 172.5

Dimensions OVRHT3D

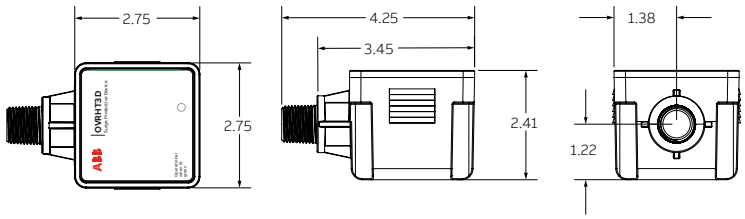

Size and mechanical specifications	
Dimensions	4.25” x 2.41” x 2.75”
Weight	0.23 kg (0.5 lb.)
Enclosure type	Polycarbonate NEMA 4X
Installation type	Indoor/outdoor
Mounting method	Flush/flange/through-hole

OVR T2
Power frequency overvoltage protection POP

OVR T2 POP 1N

OVR T2 POP 3N

OVR T2 POP are surge protective devices SPDs which ensure protection against transient overvoltage's combined with a power frequency overvoltage protection POP. Additionally, the product combination is equipped with a build-in circuit breaker MCB.
The device fulfills the product standards IEC/EN 63052 and IEC/EN 61643-11.

IEC FEATURES - General technical data

Types			OVR T2 POP 1N Cxx	OVR T2 POP 3N Cxx
General electrical features				
Standards			IEC/EN 61643-11	IEC/EN 61643-11
			IEC/EN 63052	IEC/EN 63052
			IEC/EN 60898-1	IEC/EN 60898-1
Type / test class			T2/Class II	T2/Class II
Protected lines			1+N	3+N
Types of networks			TNS / TNC-S / TT	TNS / TNC-S / TT
Nominal voltage U_n		[V]	230/400	230/400
Voltage regulation of the system network			± 10 %	± 10 %
Type of current AC			AC 50Hz	AC 50Hz
SPD - surge protection device				
Maximum continuous operating voltage U_c		[V]	255	255
Maximum discharge current I_{max} (8/20)		[kA]	15	15
Nominal discharge current I_n (8/20)	(L-N / N-PE)	[kA]	5 / 10	5 / 20
Voltage protection level U_p at I_n	(L-N / N-PE)	[kV]	≤ 1.5	≤ 1.5
Response time	(L-N / N-PE)	[ns]	≤ 25 / ≤ 100	≤ 25 / ≤ 100
Backup protection	Circuit Breaker (C curve)		integrated	integrated
Pluggable cartridge			No	No
Integrated Thermal Disconnector			Yes	Yes
State Indicator			Yes	Yes
Auxiliary contact			No	No
MCB - minature circuit breaker				
Poles			1P+N	3P+N
Tripping characteristic			C	C
Rated current I_n		[A]	10...63	10...63
Rated short-circuit capacity I_{cn}		[kA]	6	6
POP - power frequency overvoltage protection				
Actuation method			Integrated MCB	Integrated MCB
Test button			Yes	Yes
POP tripping curve (acc. IEC/EN 63052)	Standard values of break		Ua=255V: no tripping	Ua=255V: no tripping
	time and non-actuating time		Ua=275V: Tmin=3s; Tmax=15s	Ua=275V: Tmin=3s; Tmax=15s
	at a voltage Ua		Ua=300V: Tmin=1s; Tmax=5s	Ua=300V: Tmin=1s; Tmax=5s
			Ua=350V: Tmin=0.25s; Tmax=0.75s	Ua=350V: Tmin=0.25s; Tmax=0.75s
			Ua=400V: Tmin=0.07s; Tmax=0.2s	Ua=400V: Tmin=0.07s; Tmax=0.2s

OVR T2

Power frequency overvoltage protection POP

IEC FEATURES - General technical data

Installation				
Wire range (L, N)	solid and flexible wire	[mm²]	In=10A: 1.5...25	In=10A: 1.5...25
		[mm²]	In=16A / In=20A: 2.5...25	In=16A / In=20A: 2.5...25
		[mm²]	In=25A: 4...25	In=25A: 4...25
		[mm²]	In=32A: 6...25	In=32A: 6...25
		[mm²]	In=40A / In=50A: 10...25	In=40A / In=50A: 10...25
		[mm²]	In=63A: 16...25	In=63A: 16...25
Wire range (PE)	solid and flexible wire	[mm²]	6...10	6...10
Stripping length (L, N)		[mm²]	12	12
Stripping length (PE)		[mm²]	8	8
Tightening torque (L, N)		[Nm]	2	2
Tightening torque (PE)		[Nm]	1,2	1,2
Screwdriver (L, N)			No. 2 Pozidrive	No. 2 Pozidrive
Screwdriver (PE)			No. 1 Pozidrive	No. 1 Pozidrive
Miscellaneous characteristics				
Stocking and operating temperature		[°C]	-5 to +40	-5 to +40
Humidity			5 ...95%	5 ...95%
Degree of protection			IP20 - Indoor	IP20 - Indoor
Dimensions				
Product	Height x Width x Depth	[mm]	96 x 52 x 76	96 x 123 x 76
Weight			Approx. 396 g	Approx. 811 g
No of DIN-modules			3	7

Ordering details

Protected lines	Nominal voltage	Max. cont. operating voltage	Max. discharge current	Nominal current SPD (L-N)/ (N-PE)	Voltage protect. level (L-N)/ (N-PE)	Nominal current MCB	Breaking capacity	Bbn 4053546	Order details		Weight Pkg (1 pce)
	U_n V	U_c V	I_{max} 8/20	I_n kA	U_p kV	I_n A	I_{cn} kA	EAN	Type code	Order code	kg
Type T2 POP Permanent Overvoltage Protection											
1P+N	230	255	15	5 / 10	≤1.5	10	6	169867	OVR T2 POP 1N C10	2CTB802153R0102	0,396
1P+N	230	255	15	5 / 10	≤1.5	16	6	169904	OVR T2 POP 1N C16	2CTB802153R0162	0,396
1P+N	230	255	15	5 / 10	≤1.5	20	6	169942	OVR T2 POP 1N C20	2CTB802153R0202	0,396
1P+N	230	255	15	5 / 10	≤1.5	25	6	169980	OVR T2 POP 1N C25	2CTB802153R0252	0,396
1P+N	230	255	15	5 / 10	≤1.5	32	6	170023	OVR T2 POP 1N C32	2CTB802153R0322	0,396
1P+N	230	255	15	5 / 10	≤1.5	40	6	170061	OVR T2 POP 1N C40	2CTB802153R0402	0,396
1P+N	230	255	15	5 / 10	≤1.5	50	6	170108	OVR T2 POP 1N C50	2CTB802153R0502	0,396
1P+N	230	255	15	5 / 10	≤1.5	63	6	170146	OVR T2 POP 1N C63	2CTB802153R0632	0,396
3P+N	230	255	15	5 / 20	≤1.5	10	6	169881	OVR T2 POP 3N C10	2CTB802153R0104	0,811
3P+N	230	255	15	5 / 20	≤1.5	16	6	169928	OVR T2 POP 3N C16	2CTB802153R0164	0,811
3P+N	230	255	15	5 / 20	≤1.5	20	6	169966	OVR T2 POP 3N C20	2CTB802153R0204	0,811
3P+N	230	255	15	5 / 20	≤1.5	25	6	170009	OVR T2 POP 3N C25	2CTB802153R0254	0,811
3P+N	230	255	15	5 / 20	≤1.5	32	6	170047	OVR T2 POP 3N C32	2CTB802153R0324	0,811
3P+N	230	255	15	5 / 20	≤1.5	40	6	170085	OVR T2 POP 3N C40	2CTB802153R0404	0,811
3P+N	230	255	15	5 / 20	≤1.5	50	6	170122	OVR T2 POP 3N C50	2CTB802153R0504	0,811
3P+N	230	255	15	5 / 20	≤1.5	63	6	170160	OVR T2 POP 3N C63	2CTB802153R0634	0,811

TPME Series

Wall-mount SPD

Wall-mount SPD with enhanced thermal protection

- UL Listed 1449 5th Edition, Type 1, Type 2
- cUL Listed, CSA C22.2
- UL 96A, for use in lightning protection systems
- Standard features include a surge counter, audible alarm, indicating lights, dry contacts and NEMA 4 painted steel enclosure
- 10-year limited warranty
- xxx per phase/ xxx per mode

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TPME120Sxxx**WMN**
208Y/120	3-phase, 4-wire + ground	TPME120Yxxx**WMN**
380Y/220	3-phase, 4-wire + ground	TPME220Yxxx**WMN**
240 Delta	3-phase, 3-wire + ground	TPME240Dxxx**WMN**
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TPME240Hxxx**WMN**
415Y/240	3-phase, 4-wire + ground	TPME240Yxxx**WMN**
480Y/277	3-phase, 4-wire + ground	TPME277Yxxx**WMN**
600Y/347	3-phase, 4-wire + ground	TPME347Yxxx**WMN**
480 Delta	3-phase, 3-wire + ground	TPME480Dxxx**WMN**
Desired kA		**xx Code**
65 per mode		06
80 per mode		08
100 per mode		10
Options	**Weight**	**Suffix**
Painted steel, NEMA 4 without disconnect*	44 lbs. (20.0 kg)	WMN4S
		WMN4ST1**
Stainless steel, NEMA 4X without disconnect	50 lbs. (22.7 kg)	WMN4X
		WMN4XT1**
Painted steel, NEMA 1 with disconnect	63 lbs. (28.5 kg)	WMN1
		WMN1T1**
Fiberglass, NEMA 4X with disconnect	56 lbs. (25.4 kg)	WMN4
		WMN4**

* Standard enclosure
** Type 1 SPD

Electrical characteristics	
Maximum surge current rating	xxx per phase/ xxx per mode 130 kA per phase/ 65 kA per mode 160 kA per phase/ 80 kA per mode 200 kA per phase/ 100 kA per mode
Nominal discharge current rating (L-N)	20 kA
Operating frequency	50–60 Hz
Surge life (IEEE C62.41 - C3 10 kA)	≥5,000 impulses
Connection method	#6 to 2/0 AWG conductors, parallel connected
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	200 kAIC
Standard monitoring	Status indicator lights (one per phase) and red service light Audible alarm with silencer and test switch Contacts for remote monitoring (2 amp, 125 V AC)–(1 amp, 30 V DC) 6-digit LCD re-settable surge event counter
EMI / RFI filter attenuation	
Maximum attenuation frequency	-50 dB at 100 kHz
Mechanical characteristics	
Weight	Varies and depends on enclosure type
Enclosure type	Varies on option chosen
Installation location	Service entrance equipment, primary distribution equipment
Mounting method	Surface mount, 4-point mounting brackets
Operating temperature	-40 °F to 149 °F (-40 °C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Individually fused thermally protected MOV technology
Regulations and certifications	
UL 1449 5th Edition	VZCA: E320456 Type 1 / Type 2
cUL, CSA C22.2	VZCA7: E320456 Type 2 / Type 2
UL 1283	FOKY: E320456 Type 2
UL 96A	Yes
IEEE C62.62, C62.72, C62.41	Yes
Listed by	UL

TPHE Series

Wall-mount SPD

Wall-mount SPD with enhanced thermal protection

- UL Listed 1449 5th Edition, Type 1, Type 2
- cUL Listed, CSA C22.2
- UL 96A, for use in lightning protection systems
- Thermally protected MOV design eliminates the need for additional upstream over-current protection
- Standard features include a surge counter, audible alarm, indicating lights, dry contacts and NEMA 4 painted steel enclosure
- 10-year limited warranty
- xxx per phase/ xxx per mode

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TPHE120Sxxx WMN
208Y/120	3-phase, 4-wire + ground	TPHE120Yxxx WMN
380Y/220	3-phase, 4-wire + ground	TPHE220Yxxx WMN
240 Delta	3-phase, 3-wire + ground	TPHE240Dxxx WMN
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TPHE240Hxxx WMN
415Y/240	3-phase, 4-wire + ground	TPHE240Yxxx WMN
480Y/277	3-phase, 4-wire + ground	TPHE277Yxxx WMN
600Y/347	3-phase, 4-wire + ground	TPHE347Yxxx WMN
480 Delta	3-phase, 3-wire + ground	TPHE480Dxxx WMN

Desired kA	xxx Code
125 per mode	12
150 per mode	15
200 per mode	20
250 per mode	25
300 per mode	30

Options	Weight	Suffix
Painted steel, NEMA 4 without disconnect*	44 lbs. (20.0 kg)	WMN4S
		WMN4ST1**
Stainless steel, NEMA 4X without disconnect	50 lbs. (22.7 kg)	WMN4X
		WMN4XT1**
Painted steel, NEMA 1 with disconnect	63 lbs. (28.5 kg)	WMN1
		WMN1T1**
Fiberglass, NEMA 4X with disconnect	56 lbs. (25.4 kg)	WMN4
		WMN4**

* Standard enclosure
** Type 1 SPD

Electrical characteristics	
Maximum surge current rating	250 kA per phase/ 125 kA per mode 300 kA per phase/ 150 kA per mode 400 kA per phase/ 200 kA per mode 500 kA per phase/ 250 kA per mode 600 kA per phase/ 300 kA per mode
Nominal discharge current rating (L-N)	20 kA
Operating frequency	50–60 Hz
Surge life (IEEE C62.41 - C3 10 kA)	≥20,000 impulses
Connection method	#6 to 2/0 AWG conductors, parallel connected
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	200 kAIC
Standard monitoring	Status indicator lights (one per phase) and red service light Audible alarm with silencer and test switch Contacts for remote monitoring (2 amp, 125 V AC)–(1 amp, 30 V DC) 6-digit LCD re-settable surge event counter
EMI / RFI filter attenuation	
Maximum attenuation frequency	-50 dB at 100 kHz
Mechanical characteristics	
Weight	Varies and depends on enclosure type
Enclosure type	Varies on option chosen
Installation location	Service entrance equipment, primary distribution equipment
Mounting method	Surface mount, 4-point mounting brackets
Operating temperature	-40 °F to 149 F (-40 °C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Individually fused thermally protected MOV technology
Regulations and certifications	
UL 1449 5th Edition	VZCA: E320456 Type 1 / Type 2
cUL, CSA C22.2	VZCA7: E320456 Type 2 / Type 2
UL 1283	FOKY: E320456 Type 2
UL 96A	Yes
IEEE C62.62, C62.72, C62.41	Yes
Listed by	UL

TLE Series

Wall-mount SPD

Wall-mount SPD

- UL Listed 1449 5th Edition, Type 2
- cUL Listed, CSA C22.2
- Compact and economical design for use at medium-exposure distribution or branch panels
- Patented thermal fuse technology
- Standard features include status indicating LEDs, form C dry contacts for remote monitoring and NEMA 12 painted steel enclosure
- 10-year limited warranty
- xxx per phase/ xxx per mode

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TLE120Sxxx WM
208Y/120	3-phase, 4-wire + ground	TLE120Yxxx WM
380Y/220	3-phase, 4-wire + ground	TLE220Yxxx WM
240 Delta	3-phase, 3-wire + ground	TLE240Dxxx WM
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TLE240Hxxx WM
415Y/240	3-phase, 4-wire + ground	TLE240Yxxx WM
480Y/277	3-phase, 4-wire + ground	TLE277Yxxx WM
480 Delta	3-phase, 3-wire + ground	TLE480Dxxx WM
Desired kA		**xxx Code**
25 per mode		025
50 per mode		050

Electrical characteristics	
Maximum surge current rating	xxx per phase/ xxx per mode 50 kA per phase/ 25 kA per mode 100 kA per phase/ 50 kA per mode
Nominal discharge current rating (L-N)	10 kA
Operating frequency	50–60 Hz
Surge life (IEEE C62.41 - C3 10 kA)	≥3,500 impulses
Connection method	#10 AWG conductors, parallel connected
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	65 kA (30 A breaker required)
Standard monitoring	Status indicator lights (one per phase) Standard dry (form C) relay contacts
Mechanical characteristics	
Weight	17 lbs. (7.7 kg)
Enclosure type	Painted steel, NEMA 12
Installation location	Secondary distribution equipment, branch panels – Rated for UL and NEC 2020 Type 2 installation locations
Mounting method	Dual mounting flanges / ¾" NPT offset nipple
Operating temperature	-40 °F to 149 °F (-40 °C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Thermal fuse technology
Regulations and certifications	
UL 1449 5th Edition	VZCA: E320456 Type 2
cUL, CSA C22.2	VZCA7: E320456 Type 2
IEEE C62.62, C62.72	Yes
Listed by	UL

TME Series

Wall-mount SPD

Wall-mount SPD

- UL Listed 1449 5th Edition, Type 2
- cUL Listed, CSA C22.2
- UL 96A, for use in lightning protection systems
- Compact and economical design for use at medium-exposure distribution or branch panels
- Standard features include status indicating LEDs, form C dry contacts for remote monitoring and NEMA 12 painted steel enclosure
- 10-year limited warranty
- xxx per phase/ xxx per mode

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TME120Sxxx WM
208Y/120	3-phase, 4-wire + ground	TME120Yxxx WM
380Y/220	3-phase, 4-wire + ground	TME220Yxxx WM
240 Delta	3-phase, 3-wire + ground	TME240Dxxx WM
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TME240Hxxx WM
415Y/240	3-phase, 4-wire + ground	TME240Yxxx WM
480Y/277	3-phase, 4-wire + ground	TME277Yxxx WM
480 Delta	3-phase, 3-wire + ground	TME480Dxxx WM

Desired kA	xxx Code
65 per mode	065
80 per mode	080
100 per mode	100

Electrical characteristics	
Maximum surge current rating	xxx per phase/ xxx per mode 130 kA per phase/ 65 kA per mode 160 kA per phase/ 80 kA per mode 200 kA per phase/ 100 kA per mode
Nominal discharge current rating (L-N)	20 kA
Operating frequency	50–60 Hz
Surge life (IEEE C62.41 - C3 10 kA)	≥5,000 impulses
Connection method	#10 AWG conductors, parallel connected
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	65 kA (30 A breaker required)
Standard monitoring	Status indicator lights (one per phase) Standard dry (form C) relay contacts
EMI / RFI filter attenuation	
Maximum attenuation frequency	-44 dB at 50 kHz–100 MHz
Mechanical characteristics	
Weight	17 lbs. (7.7 kg)
Enclosure type	Painted steel, NEMA 12
Installation location	Service entrance equipment, primary distribution equipment – Rated for UL and NEC 2020 Type 2 installation locations
Mounting method	Dual mounting flanges / ¾" NPT offset nipple
Operating temperature	-40 °F to 149 °F (-40 °C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Thermal fuse technology
Regulations and certifications	
UL 1449 5th Edition	VZCA: E320456 Type 2
cUL, CSA C22.2	VZCA7: E320456 Type 2
UL 1283	FOKY: E320456 Type 2
UL 96A	Yes
IEEE C62.62, C62.72	Yes
Listed by	UL

TPME Series

Integrated SPD (A Series)

Designed to connect within ReliaGear™ panelboards

- UL Listed 1449 5th Edition, Type 1, Type 2
- cUL, CSA C22.2
- Factory installed in Reliagear panel
- Connects directly to the Reliagear switchboard/power panel
- Standard features include a surge counter, audible alarm, indicating lights, dry contacts
- 10-year limited warranty
- xxx per phase/ xxx per mode

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TPME120Sxx*
208Y/120	3-phase, 4-wire + ground	TPME120Yxx*
240 Delta	3-phase, 3-wire + ground	TPME240Dxx*
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TPME240Hxx*
415Y/240	3-phase, 4-wire + ground	TPME240Yxx*
480Y/277	3-phase, 4-wire + ground	TPME277Yxx*
380Y/220	3-phase, 4-wire + ground	TPME220Yxx*
600Y/347	3-phase, 4-wire + ground	TPME347Yxx*
480 Delta	3-phase, 3-wire + ground	TPME480Dxx*
Desired kA		**xx Code**
65 per mode		06
80 per mode		08
100 per mode		10
Options (*)		**Suffix (*)**
With UL 1283 noise filter and surge counter *		AS
Without UL 1283 noise filtering only (available in 100 kA per mode only)		ASNF
Without UL 1283 noise filter and surge counter (available in 100 kA per mode only)		ASNC
Full featured with UL 1283 noise filtering and surge counter for UL Type 1 locations		AST1

* Standard option

Electrical characteristics	
Maximum surge current rating	xxx per phase/ xxx per mode mode 130 kA per phase/ 65 kA per mode 160 kA per phase/ 80 kA per mode 200 kA per phase/ 100 kA per mode
Nominal discharge current rating (L-N)	20 kA
Operating frequency	50–60 Hz
Surge life (IEEE C62.41 - C3 10 kA)	≥5,000 impulses
Connection method	Direct bus, parallel connected.
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	200 kAIC
Standard monitoring	Status indicator lights (one per phase) and red service light Audible alarm with silencer and test switch Contacts for remote monitoring (2 amp, 125 V AC)–(1 amp, 30 V DC) 6-digit LCD re-settable surge event counter
EMI / RFI filter attenuation	
Maximum attenuation frequency	-50 dB at 100 kHz
Mechanical characteristics	
Weight	13 lbs. (5.9 kg)
Enclosure type	Metallic Enclosure with ABS display panel
Installation location	Service entrance equipment, primary distribution equipment, secondary distribution equipment, lighting panels – Rated for UL and NEC 2008 Type 1 and Type 2 installation locations
Mounting method	Bolts onto electrical panel interior frame
Operating temperature	-40 °F to 149 °F (-40 °C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Individually fused thermally protected MOV technology
Regulations and certifications	
UL 1449 5th Edition	VZCA2: E320456 Type 1 / Type 2
cUL, CSA C22.2	VZCA8: E320456 Type 1 / Type 2
UL 1283	FOKY2: E320456 Type 2
UL 96A	Yes
IEEE C62.62, C62.72, C62.41	Yes
Listed by	UL

TPME Series

Integrated SPD

Designed for ABB distribution equipment

- UL Listed 1449 5th Edition, Type 1, Type 2
- cUL, CSA C22.2
- Connect to the panelboard or switchboard bus bars
- Thermally protected MOV design eliminates the need for additional upstream over-current protection
- Standard features include a surge counter, audible alarm, indicating lights, dry contacts and integral surge-rated disconnect
- 10-year limited warranty
- xxx per phase/ xxx per mode

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TPME120Sxx*
208Y/120	3-phase, 4-wire + ground	TPME120Yxx*
380Y/220	3-phase, 4-wire + ground	TPME220Yxx*
240 Delta	3-phase, 3-wire + ground	TPME240Dxx*
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TPME240Hxx*
415Y/240	3-phase, 4-wire + ground	TPME240Yxx*
480Y/277	3-phase, 4-wire + ground	TPME277Yxx*
600Y/347	3-phase, 4-wire + ground	TPME347Yxx*
480 Delta	3-phase, 3-wire + ground	TPME480Dxx*
Desired kA		**xx Code**
65 per mode		06
80 per mode		08
100 per mode		10

Options	Mounting	UL Type	Suffix (*)
ABB power panels	Integral	Type 2	PP
ABB motor control centers	Integral	Type 2	ME
ABB power panels	Integral	Type 1	PPT1
ABB motor control centers	Integral	Type 1	MET1

Electrical characteristics	
Maximum surge current rating	xxx per phase/ xxx per mode 130 kA per phase/ 65 kA per mode 160 kA per phase/ 80 kA per mode 200 kA per phase/ 100 kA per mode
Nominal discharge current rating (L-N)	20 kA
Operating frequency	50–60 Hz
Surge life (IEEE C62.41 - C3 10 kA)	≥5,000 impulses
Connection method	#6 to 2/0 AWG conductors, parallel connected
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	200 kAIC
Standard monitoring	Status indicator lights (one per phase) and red service light Audible alarm with silencer and test switch Contacts for remote monitoring (2 amp, 125 V AC)–(1 amp, 30 V DC) 6-digit LCD re-settable surge event counter
EMI / RFI filter attenuation	
Maximum attenuation frequency	-50 dB at 100 kHz
Mechanical characteristics	
Weight	24 lbs. (10.89 kg)
Installation location	Service entrance equipment, primary distribution equipment – Rated for UL and NEC 2008 Type 1 and Type 2 installation locations
Mounting method	Bolts onto electrical panel interior frame
Operating temperature	-40 °F to 149 °F (-40 °C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Individually fused thermally protected MOV technology
Regulations and certifications	
UL 1449 5th Edition	VZCA2: E320456 Type 1 / Type 2
cUL, CSA C22.2	VZCA8: E320456 Type 1 / Type 2
UL 1283	FOKY2: E320456 Type 2
UL 96A	Yes
IEEE C62.62, C62.72, C62.41	Yes
Listed by	UL

TPHE Series

Integrated SPD

Designed for ABB distribution equipment

- UL Listed 1449 5th Edition, Type 2
- cUL, CSA C22.2
- Connect to the panelboard or switchboard bus bars
- Thermally protected MOV design eliminates the need for additional upstream over-current protection
- Standard features include a surge counter, audible alarm, indicating lights, dry contacts and integral surge-rated disconnect
- 10-year limited warrranty
- xxx per phase/ xxx per mode

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TPHE120Sxx*
208Y/120	3-phase, 4-wire + ground	TPHE120Yxx*
380Y/220	3-phase, 4-wire + ground	TPHE220Yxx*
240 Delta	3-phase, 3-wire + ground	TPHE240Dxx*
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TPHE240Hxx*
415Y/240	3-phase, 4-wire + ground	TPHE240Yxx*
480Y/277	3-phase, 4-wire + ground	TPHE277Yxx*
600Y/347	3-phase, 4-wire + ground	TPHE347Yxx*
480 Delta	3-phase, 3-wire + ground	TPHE480Dxx*

Desired kA	xx Code
125 per mode	12
150 per mode	15
200 per mode	20
250 per mode	25
300 per mode	30

Options	Mounting	UL Type	Suffix (*)
ABB power panel	Integral	Type 2	PP
ABB motor control centers	Integral	Type 2	ME
ABB LV switchgear	Integral	Type 2	SG
ABB power panels	Integral	Type 1	PPT1
ABB motor control centers	Integral	Type 1	MET1
ABB LV switchgear	Integral	Type 1	SGT1

Electrical characteristics	
Maximum surge current rating	xxx per phase/ xxx per mode 250 kA per phase/ 125 kA per mode 300 kA per phase/ 150 kA per mode 400 kA per phase/ 200 kA per mode 500 kA per phase/ 250 kA per mode 600 kA per phase/ 300 kA per mode
Nominal discharge current rating (L-N)	20 kA
Operating frequency	50–60 Hz
Surge life (IEEE C62.41 - C3 10 kA)	≥20,000 impulses
Connection method	#6 to 2/0 AWG conductors, parallel connected
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	200 kAIC
Standard monitoring	Status indicator lights (one per phase) and red service light Audible alarm with silencer and test switch Contacts for remote monitoring (2 amp, 125 V AC)–(1 amp, 30 V DC) 6-digit LCD re-settable surge event counter
EMI / RFI filter attenuation	
Maximum attenuation frequency	-50 dB at 100 kHz
Mechanical characteristics	
Weight	24 lbs. (10.89 kg)
installation location	Service entrance equipment, primary distribution equipment – Rated for UL and NEC 2020 Type 1 and Type 2 installation locations
Mounting method	Bolts onto electrical panel interior frame
Operating temperature	-40 °F to 149 °F (-40 °C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Individually fused thermally protected MOV technology
Regulations and certifications	
UL 1449 5th Edition	VZCA2: E320456 Type 1 / Type 2
UL 1283	VZCA8: E320456 Type 1 / Type 2
cUL, CSA C22.2	FOKY2: E320456 Type 2
UL 96A	Yes
IEEE C62.62, C62.72, C62.41	Yes
Listed by	UL

TPME Series
Integrated SPD

Designed for ABB distribution equipment

- UL Listed 1449 5th Edition, Type 1, Type 2
- cUL, CSA C22.2
- Connect to the panelboard or switchboard bus bars
- Thermally protected MOV design eliminates the need for additional upstream over-current protection
- Standard features include a surge counter, audible alarm, indicating lights, dry contacts
- 10-year limited warrranty

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TPME120Sxx*
208Y/120	3-phase, 4-wire + ground	TPME120Yxx*
380Y/220	3-phase, 4-wire + ground	TPME220Yxx*
240 Delta	3-phase, 3-wire + ground	TPME240Dxx*
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TPME240Hxx*
415Y/240	3-phase, 4-wire + ground	TPME240Yxx*
480Y/277	3-phase, 4-wire + ground	TPME277Yxx*
600Y/347	3-phase, 4-wire + ground	TPME347Yxx*
480 Delta	3-phase, 3-wire + ground	TPME480Dxx*

Desired kA	xx Code
65 per mode	06
80 per mode	08
1200 per mode	10

Options	Mounting	UL Type	Suffix (*)
ReliaGear neXT power panel	Integral	Type 2 Type 1	NSBX NSBXT1

Electrical characteristics	
Maximum surge current rating	xxx per phase/ xxx per mode 130 kA per phase/65 kA per mode 160 kA per phase/80 kA per mode 200 kA per phase/100 kA per mode
Nominal discharge current rating (L-N)	20 kA
Operating frequency	50–60 Hz
Surge life (IEEE C62.41 - C3 10 kA)	≥5,000 impulses
Connection method	#6 to 2/0 AWG conductors, parallel connected
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	200 kAIC
Standard monitoring	Status indicator lights (one per phase) and red service light Audible alarm with silencer and test switch Contacts for remote monitoring (2 amp, 125 V AC)–(1 amp, 30 V DC) 6-digit LCD re-settable surge event counter
EMI / RFI filter attenuation	
Maximum attenuation frequency	-50 dB at 100 kHz
Mechanical characteristics	
installation location	Service entrance equipment, primary distribution equipment – Rated for UL and NEC 2008 Type 1 and Type 2 installation locations
Mounting method	Bolts onto electrical panel interior frame
Operating temperature	-40 °F to 149 °F (-40 °C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Individually fused thermally protected MOV technology
Regulations and certifications	
UL 1449 5th Edition	VZCA2: E320456 Type 1 / Type 2
cUL, CSA C22.2	VZCA8: E320456 Type 1 / Type 2
UL 1283	FOKY2: E320456 Type 2
UL 96A	Yes
IEEE C62.62, C62.72, C62.41	Yes
Listed by	UL

TPHE Series
Integrated SPD

Designed for ABB distribution equipment

- UL Listed 1449 5th Edition, Type 1, Type 2
- cUL, CSA C22.2
- Connect to the panelboard or switchboard bus bars
- Thermally protected MOV design eliminates the need for additional upstream over-current protection
- Standard features include a surge counter, audible alarm, indicating lights, dry contacts
- 10-year limited warrranty

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TPHE120Sxx*
208Y/120	3-phase, 4-wire + ground	TPHE120Yxx*
380Y/220	3-phase, 4-wire + ground	TPHE220Yxx*
240 Delta	3-phase, 3-wire + ground	TPHE240Dxx*
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TPHE240Hxx*
415Y/240	3-phase, 4-wire + ground	TPHE240Yxx*
480Y/277	3-phase, 4-wire + ground	TPHE277Yxx*
600Y/347	3-phase, 4-wire + ground	TPHE347Yxx*
480 Delta	3-phase, 3-wire + ground	TPHE480Dxx*

Desired kA	xx Code
125 per mode	12
150 per mode	15
200 per mode	20
250 per mode	25
300 per mode	30

Options	Mounting	UL Type	Suffix (*)
ReliaGear neXT power panel	Integral	Type 2 Type 1	NSBX NSBXT1

Electrical characteristics	
Maximum surge current rating	xxx per phase/ xxx per mode 250 kA per phase/125 kA per mode 300 kA per phase/150 kA per mode 400 kA per phase/200 kA per mode 500 kA per phase/250 kA per mode 600 kA per phase/300 kA per mode
Nominal discharge current rating (L-N)	20 kA
Operating frequency	50–60 Hz
Surge life (IEEE C62.41 - C3 10 kA)	≥20,000 impulses
Connection method	#6 to 2/0 AWG conductors, parallel connected
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	200 kAIC
Standard monitoring	Status indicator lights (one per phase) and red service light Audible alarm with silencer and test switch Contacts for remote monitoring (2 amp, 125 V AC)–(1 amp, 30 V DC) 6-digit LCD re-settable surge event counter
EMI / RFI filter attenuation	
Maximum attenuation frequency	-50 dB at 100 kHz
Mechanical characteristics	
installation location	Service entrance equipment, primary distribution equipment – Rated for UL and NEC 2020 Type 1 and Type 2 installation locations
Mounting method	Bolts onto electrical panel interior frame
Operating temperature	-40 °F to 149 °F (-40 °C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Individually fused thermally protected MOV technology
Regulations and certifications	
UL 1449 5th Edition	VZCA2: E320456 Type 1 / Type 2
cUL, CSA C22.2	VZCA8: E320456 Type 1 / Type 2
UL 1283	FOKY2: E320456 Type 2
UL 96A	Yes
IEEE C62.62, C62.72, C62.41	Yes
Listed by	UL

TPME Series

9" box extension SPD

Designed for ABB distribution equipment

- UL Listed 1449 5th Edition, Type 2
- cUL, CSA C22.2
- The 9" box extension SPD is field installed and attaches neatly to the top or bottom of a standard panel
- The true maximum surge current rating, unlimited by fusing, has been proven successful in third-party tests
- Standard features include a surge counter, audible alarm, indicating lights and dry contacts
- 10-year limited warranty
- xxx per phase/ xxx per mode

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TPME120SxxBX*
208Y/120	3-phase, 4-wire + ground	TPME120YxxBX*
380Y/220	3-phase, 4-wire + ground	TPME220YxxBX*
240 Delta	3-phase, 3-wire + ground	TPME240DxxBX*
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TPME240HxxBX*
415Y/240	3-phase, 4-wire + ground	TPME240YxxBX*
480Y/277	3-phase, 4-wire + ground	TPME277YxxBX*
600Y/347	3-phase, 4-wire + ground	TPME347YxxBX*
480 Delta	3-phase, 3-wire + ground	TPME480DxxBX*
Desired kA		**xx Code**
65 per mode		06
80 per mode		08
100 per mode		10
Options		**Suffix (*)**
Surface mounted, no display		9S
Surface mounted, display access		9WS
Flush mounted , no display		9F
Flush mounted, display access		9WF

Electrical characteristics	
Maximum surge current rating	xxx per phase/ xxx per mode 130 kA per phase/ 65 kA per mode 160 kA per phase/ 80 kA per mode 200 kA per phase/ 100 kA per mode
Nominal discharge current rating (L-N)	20 kA
Operating frequency	50–60 Hz
Connection method	#6 to 2/0 AWG conductors, parallel connected Note: A dedicated circuit breaker, rated 60 A or above, is recommended to provide a local disconnecting means for the SPD.
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	100 kA
Standard monitoring	Status indicator lights (one per phase) and red service light Audible alarm with silencer and test switch Contacts for remote monitoring (2 amp, 125 V AC)–(1 amp, 30 V DC) 6-digit LCD re-settable surge event counter
EMI / RFI filter attenuation	
Maximum attenuation frequency	-50 dB at 100 kHz
Mechanical characteristics	
Weight	31 lbs. (14.1 kg)
Enclosure type	NEMA 1
Installation location	Service entrance equipment, primary distribution equipment - Rated for UL and NEC 2020 Type 2 installation locations
Mounting method	Either top or bottom of Reliagear/A-Series panelboard only
Operating temperature	-40 °F to 149 °F (-40°C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Individually fused thermally protected MOV technology
Regulations and certifications	
UL 1449 5th Edition	XUPD.E248748 Type 2
UL 1283	Yes
UL 96A	Yes
cUL, CSA C22.2	VZCA7: E320456 Type 2
IEEE C62.62, C62.72	Yes
Listed by	UL

TPME Series

24" box extension SPD

Designed for ABB distribution equipment

- UL Listed 1449 5th Edition for Type 2 applications
- cUL, CSA C22.2
- This model is installed in an extended box and connects to the panelboard
- The true maximum surge current rating, unlimited by fusing, has been proven successful in third-party tests
- Standard features include a surge counter, audible alarm, indicating lights and dry contacts
- 10-year limited warranty
- xxx per phase/ xxx per mode

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TPME120Sxx BX*
208Y/120	3-phase, 4-wire + ground	TPME120Yxx BX*
380Y/220	3-phase, 4-wire + ground	TPME220Yxx BX*
240 Delta	3-phase, 3-wire + ground	TPME240Dxx BX*
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TPME240Hxx BX*
415Y/240	3-phase, 4-wire + ground	TPME240Yxx BX*
480Y/277	3-phase, 4-wire + ground	TPME277Yxx BX*
600Y/347	3-phase, 4-wire + ground	TPME347Yxx BX
480 Delta	3-phase, 3-wire + ground	TPME480Dxx BX
Desired kA		**xx Code**
65 per mode		06
80 per mode		08
100 per mode		10
Options		**Suffix (*)**
Surface mounted, display access		24WS
Flush mounted, display access		24WF

Electrical characteristics	
Maximum surge current rating	xxx per phase/ xxx per mode 130 kA phase/65 kA per mode 160 kA phase/80 kA per mode 200 kA phase/100 kA per mode
Nominal discharge current rating (L-N)	20 kA
Operating frequency	50–60 Hz
Connection method	#6 to 2/0 AWG conductors, parallel connected Note: A dedicated circuit breaker, rated 60 A or above, is recommended to provide a local disconnecting means for the SPD.
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	100 kA
Standard monitoring	Status indicator lights (one per phase) and red service light Audible alarm with silencer and test switch Contacts for remote monitoring (2 amp, 125 V AC)–(1 amp, 30 V DC) 6-digit LCD re-settable surge event counter
EMI / RFI filter attenuation	
Maximum attenuation frequency	-50 dB at 100 kHz
Mechanical characteristics	
Weight	57 lbs. (25.9 kg)
Enclosure type	NEMA 1
Installation location	Service entrance equipment, primary distribution equipment – Rated for UL and NEC 2020 Type 2 installation locations
Mounting method	Either top or bottom of Reliagear/ A-Series panelboard only
Operating temperature	-40 °F to 149 °F (-40 °C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Individually fused thermally protected MOV technology
Regulations and certifications	
UL 1449 5th Edition	XUPD.E248748 Type 2
UL 1283	Yes
UL 96A	Yes
cUL, CSA C22.2	VZCA7: E320456 Type 2
IEEE C62.62, C62.72	Yes
Listed by	UL

TPHE Series

24" box extension SPD

Designed for ABB distribution equipment

- UL Listed 1449 5th Edition for Type 2 applications
- cUL, CSA C22.2
- This model is installed in an extended box and connects to the panelboard
- The true maximum surge current rating, unlimited by fusing, has been proven successful in third-party tests
- Standard features include a surge counter, audible alarm, indicating lights and dry contacts
- 10-year limited warranty
- xxx per phase/ xxx per mode

Voltage	Configuration	Part number
240/120	1-phase, 3-wire + ground	TPHE120Sxx**BX***
208Y/120	3-phase, 4-wire + ground	TPHE120Yxx**BX***
380Y/220	3-phase, 4-wire + ground	TPHE220Yxx**BX***
240 Delta	3-phase, 3-wire + ground	TPHE240Dxx**BX***
240/120 Hi-Leg Delta	3-phase, 4-wire + ground	TPHE240Hxx**BX***
415Y/240	3-phase, 4-wire + ground	TPHE240Yxx**BX***
480Y/277	3-phase, 4-wire + ground	TPHE277Yxx**BX***
600Y/347	3-phase, 4-wire + ground	TPHE347Yxx**BX**
480 Delta	3-phase, 3-wire + ground	TPHE480Dxx**BX**
Desired kA		**xx Code**
150 per mode		15
200 per mode		20
300 per mode		30
Options		**Suffix (*)**
Surface mounted, display access		24WS
Flush mounted, display access		24WF

Electrical characteristics	
Maximum surge current rating	xxx per phase/ half xxx per mode 300 kA per phase/ 150 kA per mode 400 kA per phase/ 200 kA per mode 600 kA per phase/ 300 kA per mode
Nominal discharge current rating (L-N)	20 kA
Operating frequency	50–60 Hz
Connection method	#6 to 2/0 AWG conductors, parallel connected Note: A dedicated circuit breaker, rated 60 A or above, is recommended to provide a local disconnecting means for the SPD.
Modes of protection	All modes (L-N, L-G, N-G, L-L)
Fault rating (SCCR)	100 kA
Standard monitoring	Status indicator lights (one per phase) and red service light Audible alarm with silencer and test switch Contacts for remote monitoring (2 amp, 125 V AC)–(1 amp, 30 V DC) 6-digit LCD re-settable surge event counter
EMI / RFI filter attenuation	
Maximum attenuation frequency	-50 dB at 100 kHz
Mechanical characteristics	
Weight	57 lbs. (25.9 kg)
Enclosure type	NEMA 1
Installation location	Service entrance equipment, primary distribution equipment – Rated for UL and NEC 2020 Type 2 installation locations
Mounting method	Either top or bottom of Reliagear/ A-Series panelboard only
Operating temperature	-40 °F to 149 °F (-40 °C to 65 °C)
Altitude	0–12,000 ft. (3.66 km)
Product design	Individually fused thermally protected MOV technology
Regulations and certifications	
UL 1449 5th Edition	XUPD.E248748 Type 2
UL 1283	Yes
UL 96A	Yes
cUL, CSA C22.2	VZCA7: E320456 Type 2
IEEE C62.62, C62.72	Yes
Listed by	UL

Notes

Dimensions

TPHE and TPME series integrated SPD

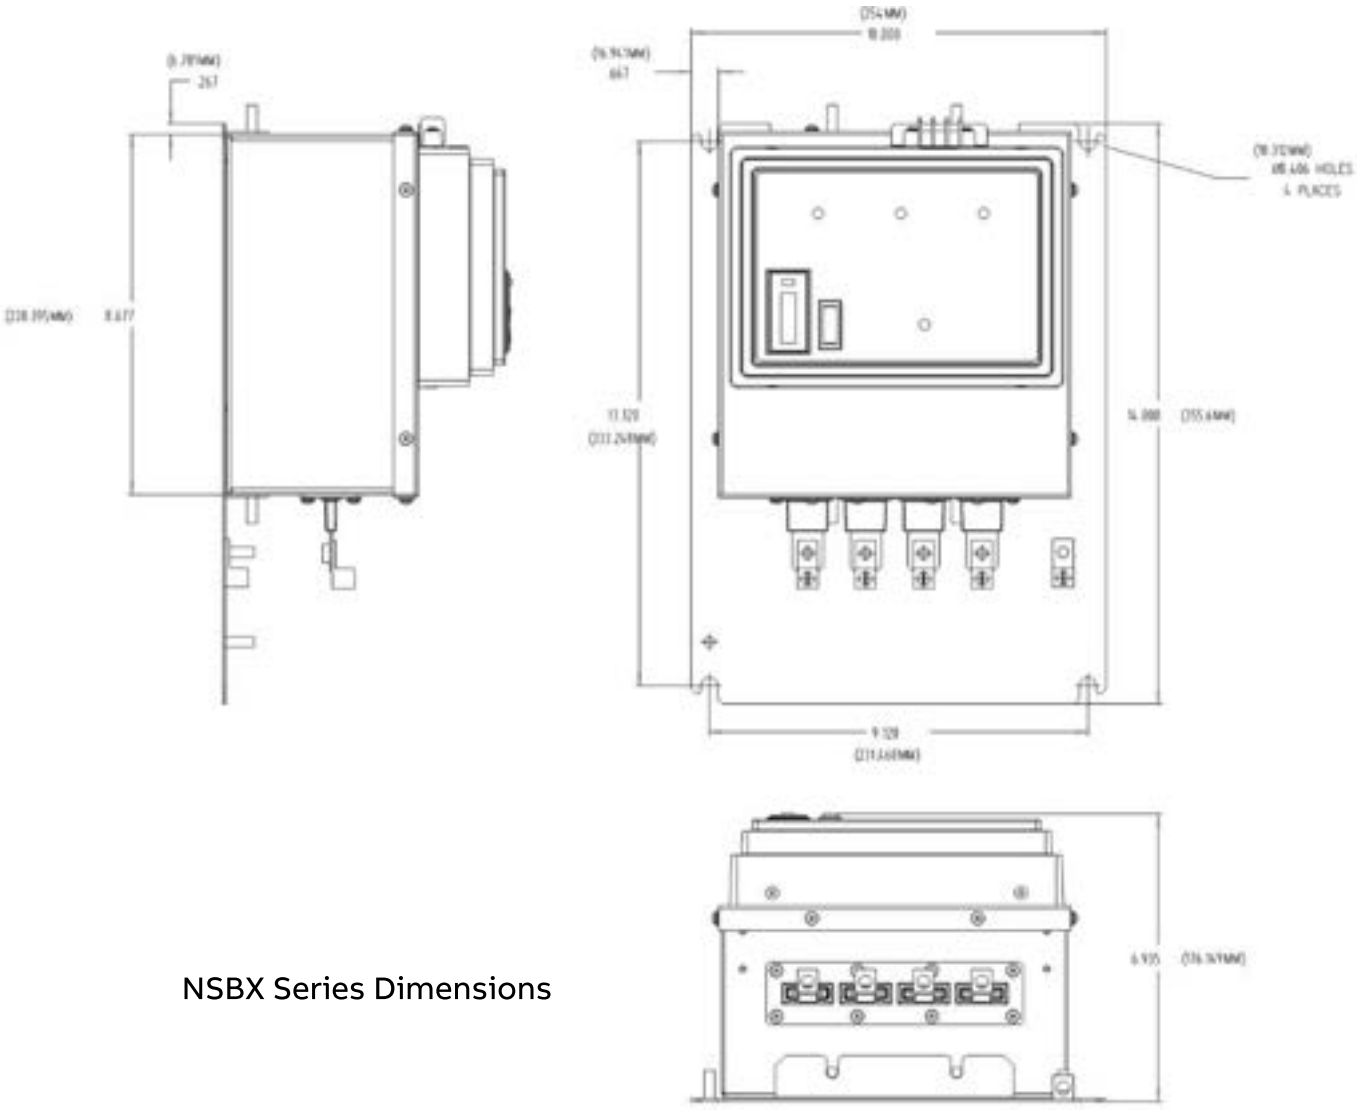

NSBX Series Dimensions

Dimensions

TPME and TPHE series wall-mount SPDs with enhanced thermal protection

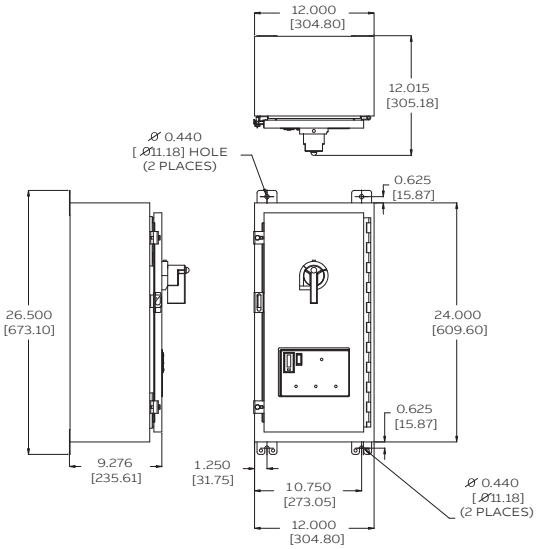

WMN1 dimensions

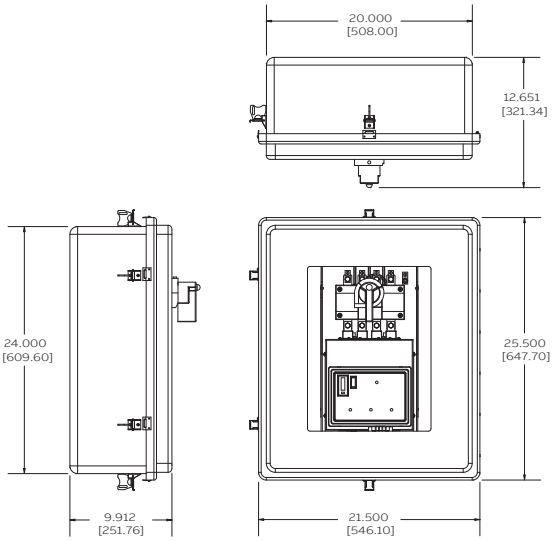

WMN4 dimensions

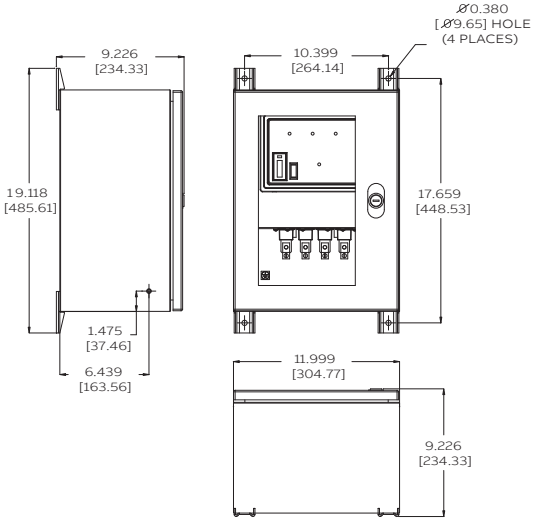

WMN4S, WMN4X dimensions

Dimensions

TME and TLE series wall-mount SPDs

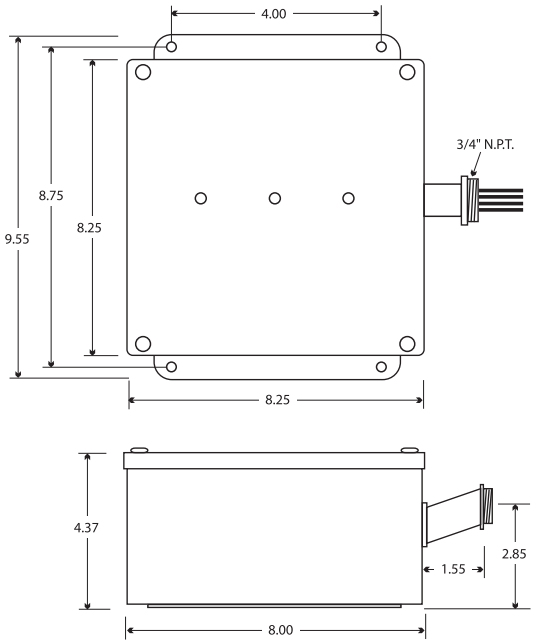

TME

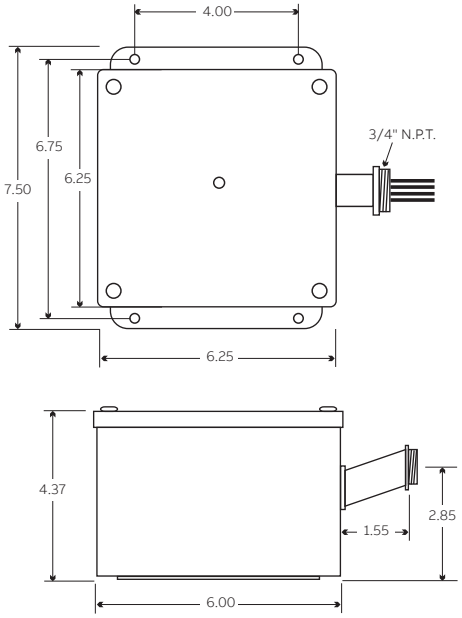

TLE

Dimensions

TPME series integrated SPD

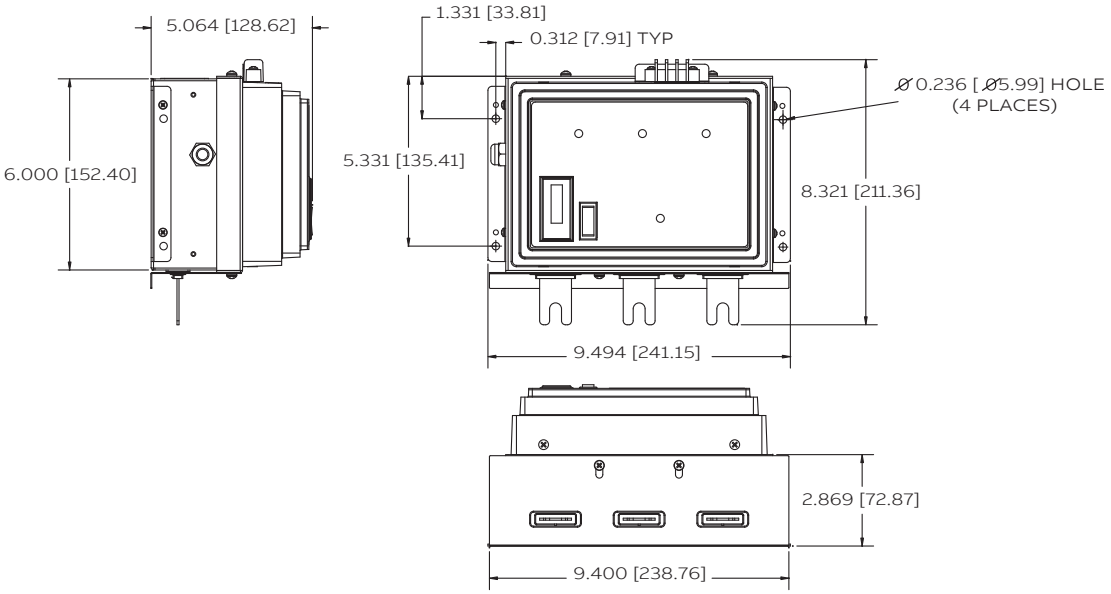

TPME and TPHE series integrated SPDs

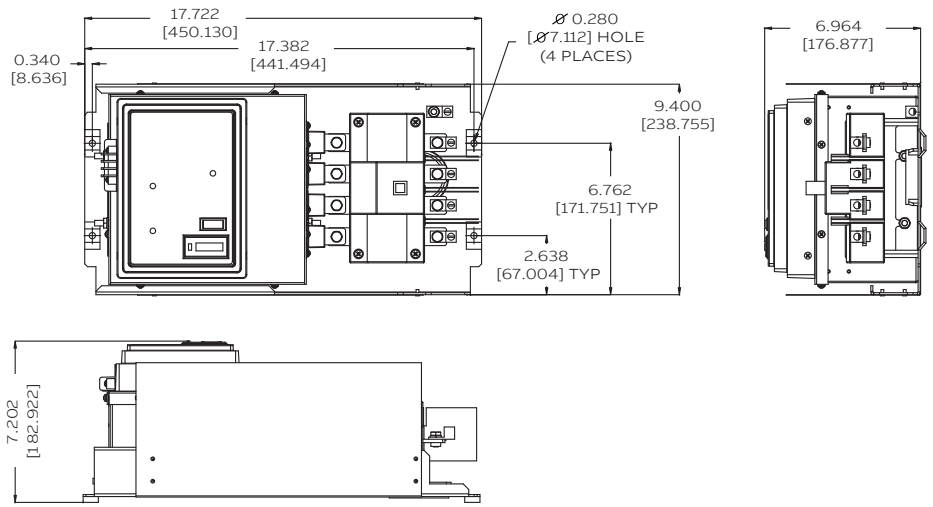

Dimensions

9" box extension SPD

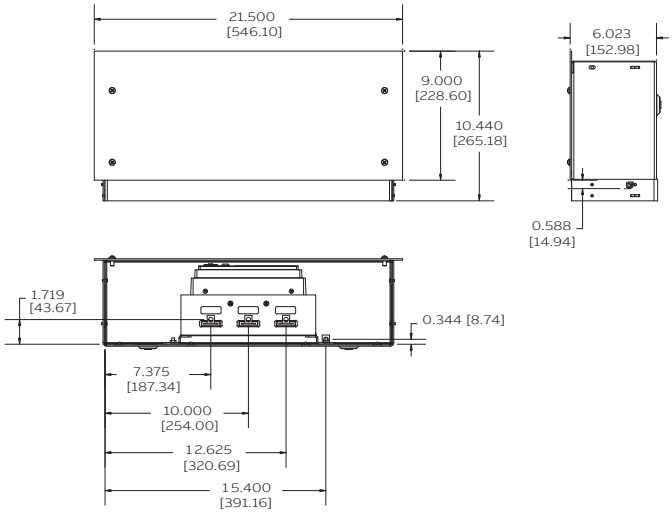

BX9F Dimensions

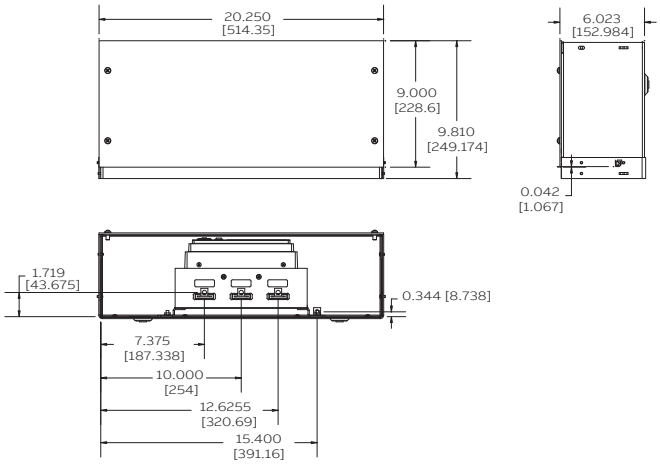

BX9S Dimensions

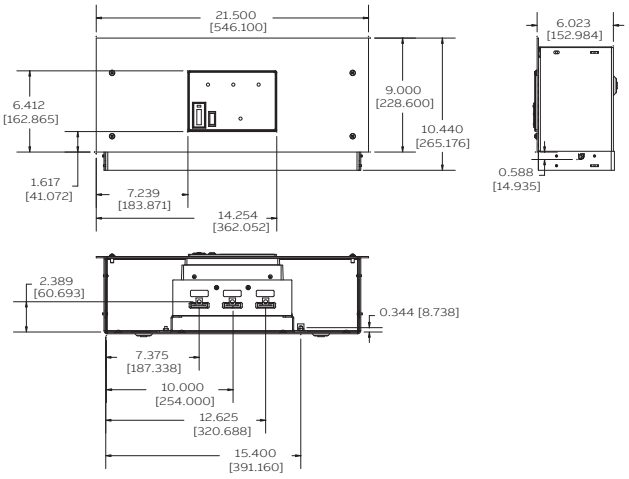

BX9WF Dimensions

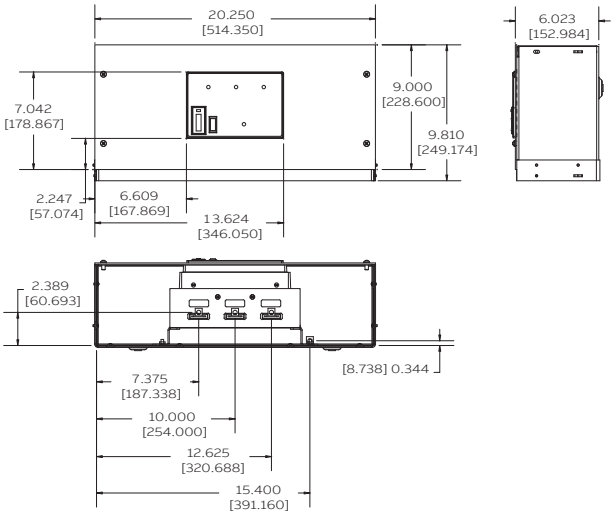

BX9WS Dimensions

Dimensions

24" box extension SPD

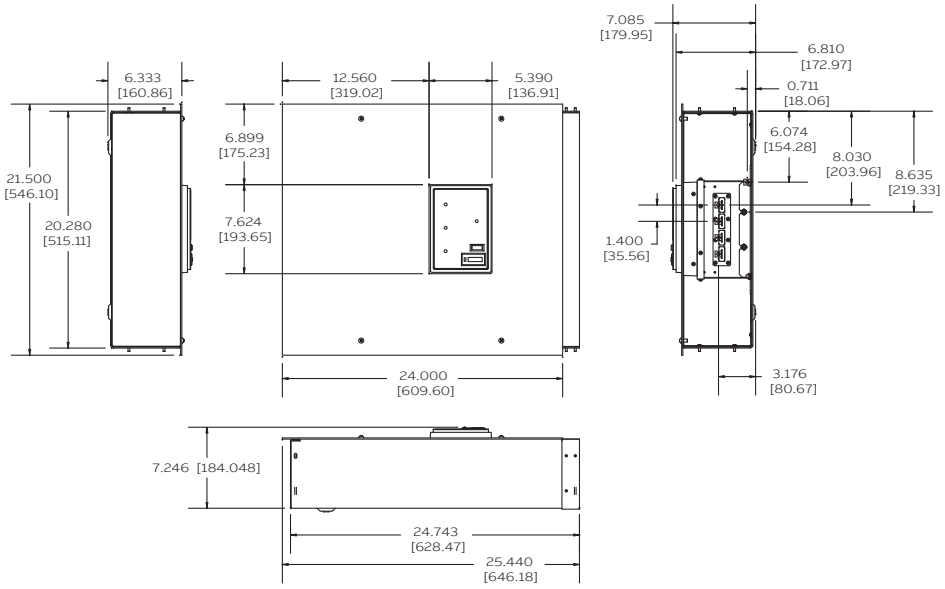

BX24WF dimensions

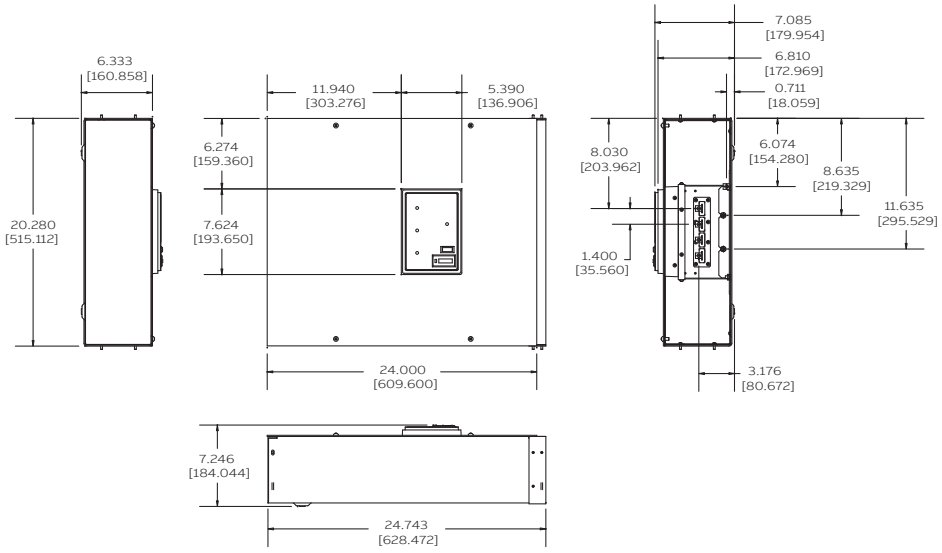

BX24WS dimensions

The ABB OVR data and telecom SPD range overview

Protecting critical electronic systems

The ABB OVR data/telecom range of SPDs are designed to protect equipment connected to data and telephone lines to complement the OVR power SPD products and offer a complete system protection solution (power & data) against surges. The comprehensive range includes protection for twisted pair data lines (including hazardous environments), computer networks, telecom systems including PBX and ISDN, CCTV, TV and RF systems.

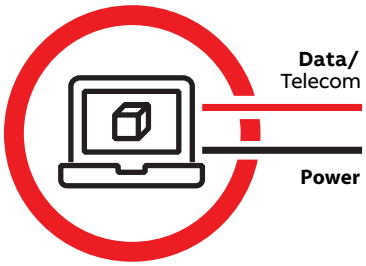

WARNING Equipment is **ONLY** protected if all incoming lines have protection fitted

To protect the electronic equipment inside a building, all cables that enter or leave the building must be protected.
Cables leaving the building can also provide a route back into the building for transients.

Data & measurement systems
- 2 wire (OVR SL series)
- 2 wire ATEX (OVR SLX series)
- 2 wire (OVR D/E/H series)
- 3 wire (OVR SL-3W series)
- 4-20 mA (OVR SL 4-20)
- 8 wire (OVR Q series)
- RTD (OVR RTD series)

Transceiver/CCTV systems
- RF (OVR RF series)
- CCTV (OVR CCTV series with OVR 240-16A)
- TV (OVR TV series)

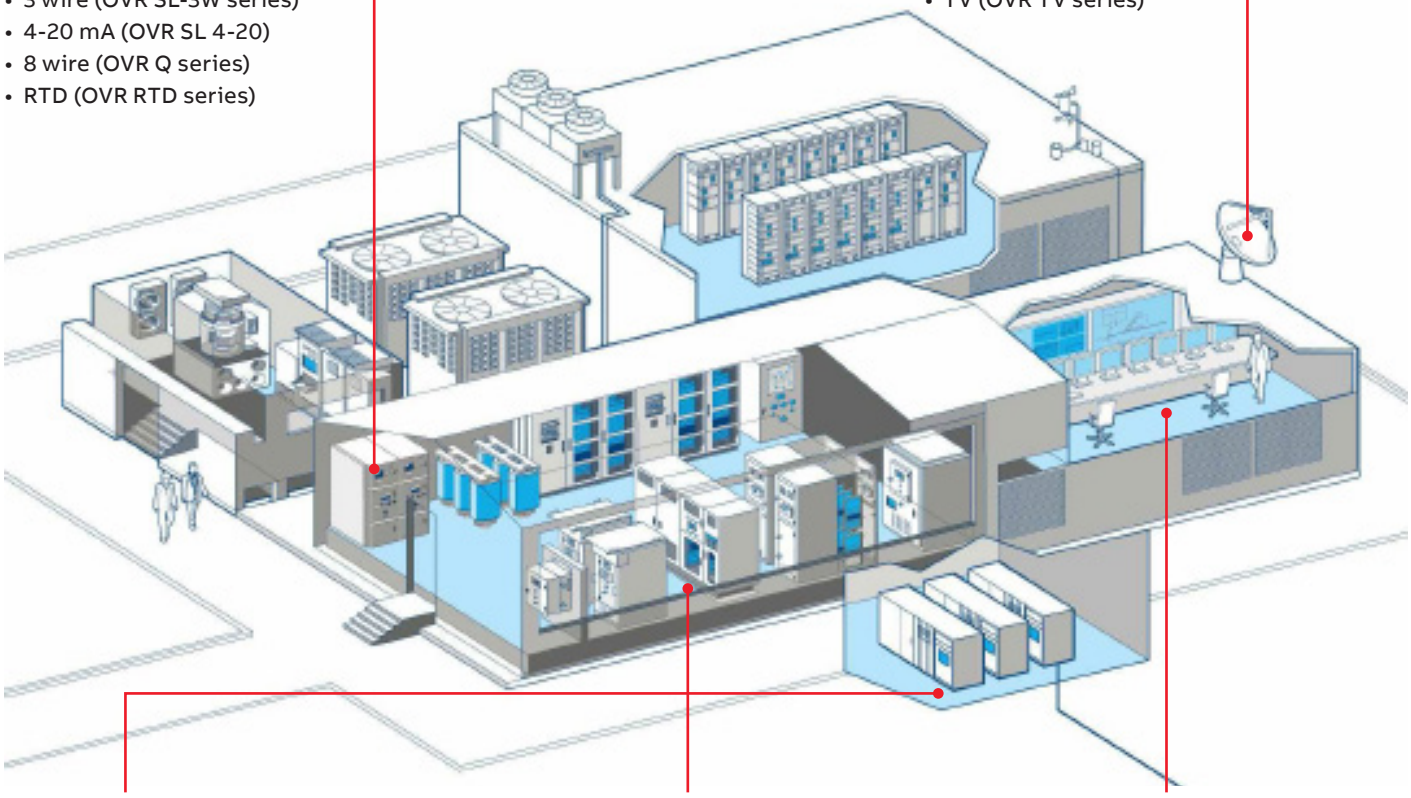

Mains power supply
- See OVR power SPD series

Telecom systems
- PBX (OVR KT series)
- RJ11 (OVR TN series)
- RJ45 (OVR ISDN series)
- 2 wire (OVR TN, OVR SLTN)
- 8 wire (OVR TNQ)

Information technology systems
- Cat 6 + PoE (OVR Cat-6 series)
- Cat 5e + PoE (OVR Cat-5e series)
- RS485/HART/Profibus (OVR RS485 series)

Protection and safety

Short Selection Guide – Surge Protection Devices OVR

PROFIBUS Systems HART Systems	 OVR RS485 Flat/DIN Mount 7TCA085400R0310	 **OVR SL RS485** Slim DIN Mount 7TCA085400R0310	 **OVR RS485Q** Multiple Lines (DIN Mount) 7TCA085400R0312				
Ethernet	 withPoE:	Cat-5 (100 Mbps) **OVR Cat-5e** 7TCA085400R0289 7TCA085400R0290	Cat-6 (1000 Mbps) **OVR Cat-6e** 7TCA085400R0291 7TCA085400R0292				
Video Surveillance CCTV	 **5V CCTV** with BNC connector, power, and telemetry line	 **OVR CCTV/B** Video signal 7TCA085400R0296	 **OVR RS485** Telemetry signal 7TCA085400R0310	 **OVR 240-16A** Power line 7TCA085460R0361	 **OVR CME4** Earth Bar 7TCA085400R0414	 **OVR WBX4/GS** Enclosure 7TCA085410R0049	CCTV Protection is also available for different voltages and twisted pair connections.
4 - 20 mA current loops	Screw terminals 30 V	 **OVR SL30L/4-20** 7TCA085400R0371					
Coaxial antennas: GSM, UMTS, Radar, Radio, TV, GPS		Female coaxial connector:	**OVR RF 441421** BNC 7TCA085450R0066	**OVR RF AA1421** 7/16 DIN 7TCA085450R0063	**OVR RF 111421** N 7TCA085450R0065		
Telephone ISDN DSL	 **2 wire Telecom**	Screw terminals:	 **OVR TN** Flat Mount 7TCA085400R0345	 **OVR SL TN** Slim Mount 7TCA085400R0323	 **OVR SL TNL** Slim Mount with LED 7TCA085400R0418	 **OVR TNQ** Multiple Lines 7TCA085400R0344	
		RJ11, RJ45	RJ11 telephone units	**OVR TN/RJ11-6/6** 6P6C Connector 7TCA085400R0359	RJ45 network units	**OVR ISDN/RJ45-4/8** 8P4C Connector 7TCA085400R0359	
		PBX Telecom	LSA-PLUS connection	**OVR KT1** Single module 7TCA085400R0305	**OVR K10T1** 10 modules 7TCA085400R0307	**OVR KE10** Earth Bar 7TCA085400R0304	
TV: Satellite, Cable			**OVR CATV/F** Cable 7TCA085400R0293	**OVR SMATV/F** Satellite 7TCA085400R0336	**OVR TV/EURO** Antenna 7TCA085400R0334		
2 wire systems (30V)		 **OVR 30E** Flat Mount 7TCA085400R0353	 **OVR SL30** Slim Mount 7TCA085400R0363	 **OVR 30Q** Multiple Lines 7TCA085400R0341	Protection for different voltages are available		
3 wire systems (30V)		 **OVR SL30/3W** Slim Mount 7TCA085400R0331	Protection for different voltages are available				
Hazardous Areas ATEX/IEC approved		 **OVR SL15X** 15 Volt 7TCA085400R0386	**OVR SL30X** 30 Volt 7TCA085400R0387				
Resistance Temperature Detectors (RTD)		 **OVR RTD** Flat/DIN Mount 7TCA085400R0313	 **OVR SL RTD** Slim (DIN Mount) 7TCA085400R0315	 **OVR RTDQ** Multiple Lines (DIN Mount) 7TCA085400R0314			

WARNING Equipment is **ONLY** protected if all incoming lines have protection fitted

Protection and safety

Data & signal protection

OVR SL Series

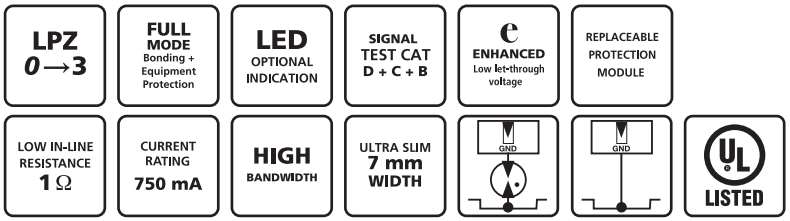

Combined Category D, C, B tested (to IEC/EN 61643) Surge Protection Device (SPD) suitable for twisted pair signalling applications which require either a lower in-line resistance, an increased current and/or higher bandwidth. Also suitable for DC power applications less than 0.75 Amps. Available for working voltages of up to 6, 15, 30, 50, 110 and 180 Volts, and also for global telephone applications up to 296 Volts. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Ultra slim 7 mm width ideal for compact protection of large numbers of lines (e.g. process control installations)
- Optional LED status indication versions available for low current DC power applications - add L suffix to part number - e.g. OVR SL30L
- Two stage removable protection module with simple quick release mechanism allowing partial removal for easy line commissioning and maintenance as well as full removal for protection replacement
- Strong, flame retardant, polymer housing
- High maximum running current
- High bandwidth enables higher frequency (high traffic or bit rate) data communications
- Screen terminal enables easy connection of cable screen to earth
- Suitable for earthed or isolated screen systems - add /I suffix to part number for versions that require isolated screens - e.g. OVR SL30/I
- Built-in innovative DIN rail foot with locking feature for simple positioning and clip-on mounting to top hat DIN rails
- 4 mm2 terminals allow for larger cross section wiring, stranded wires terminated with ferrules or fitting two wires into a single terminal
- Convenient earthing through DIN foot and/or earth terminal
- Very low (1 Ω) in-line resistance allows resistance critical applications (e.g. alarm loops) to be protected
- OVR SL06-SL180 (UL) have UL497B approval under file E506434 (OVR SLTN not included)

Application

Use these SPDs where installation space is at a premium and large numbers of lines require protection (e.g. process control, high speed digital communication equipment or systems with long signal lines).

Accessories

For replacement SPD modules (/M), spare base units (/B) and weatherproof enclosures (WBX) see ABB order code table overleaf.

Installation

Connect in series with the data communication or signal line either near where it enters or leaves the building or close to the equipment being protected (e.g. within its control panel). Either way, it must be very close to the system's earth star point. Install SPDs either within an existing cabinet/cubicle or in a separate enclosure.

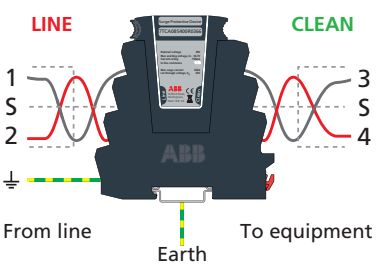

NOTE: The OVR SL 'Slim Line' Series is also available for protection of 3-wire, RS 485 and RTD applications (OVR SL/3W, OVR SL RS485 & OVR SL RTD). The OVR SL X Series has approvals for use in hazardous areas. For telecommunication applications use OVR SLTN Series.

Protection and safety

Data & signal protection

OVR SL Series

OVR SL Series - Technical specification

Electrical specification		**OVR SL06**	**OVR SL15**	**OVR SL30**	**OVR SL50**	**OVR SL110**
ABB order code		7TCA085400R0360	7TCA085400R0361	7TCA085400R0363	7TCA085400R0364	7TCA085400R0362
Nominal voltage [1]		6 V	15 V	30 V	50 V	110 V
Maximum working voltage Uc (RMS/DC) [2]		5 V/7.79 V	11 V/16.7 V	25 V/36.7 V	40 V/56.7 V	93 V/132 V
Current rating (signal)		750 mA				
In-line resistance (per line ±10%)		1.0 Ω				
Bandwidth (-3 dB 50 Ω system)		45 MHz	45 MHz	45 MHz	45 MHz	45 MHz
Transient specification		**OVR SL06**	**OVR SL15**	**OVR SL30**	**OVR SL50**	**OVR SL110**
Let-through voltage (all conductors) [3] Up						
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21		36.0 V	38.4 V	63.0 V	90.3 V	185 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21		26.2 V	29.4 V	51.3 V	77.2 V	175 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21		16.0 V	26.8 V	45.4 V	68.3 V	165 V
5 kV, 10/700 µs [4]		17.0 V	27.5 V	46.3 V	69.1 V	170 V
Maximum surge current						
D1 test 10/350 µs to BS EN/EN/IEC 61643-21	– Per signal wire	1.25 kA				
	– Per pair	2.5 kA				
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002	– Per signal wire	10 kA				
	– Per pair	20 kA				
Mechanical specification		**OVR SL06**	**OVR SL15**	**OVR SL30**	**OVR SL50**	**OVR SL110**
Temperature range		-40 to +80 °C				
Connection type		Screw terminal - maximum torque 0.8 Nm				
Conductor size (stranded)		4 mm²				
Earth connection		Via DIN rail or 4 mm² earth terminal - maximum torque 0.8 Nm				
Case material		FR Polymer UL-94 V-0				
Weight	– Unit	0.08 kg				
	– Packaged (per 10)	0.85 kg				
Dimensions		See diagram below				

[1] Nominal voltage (RMS/DC or AC peak) measured at < 10 µA (OVR SL15, OVR SL30, OVR SL50, OVR SL110 and LED variants) and < 200 µA (OVR SL06 and OVR SL06L)
[2] Maximum working voltage (RMS/DC or AC peak) measured at < 1 mA leakage
[3] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
[4] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45, Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

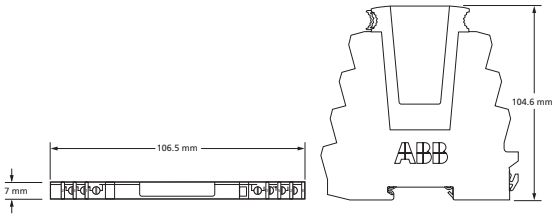

ABB order codes

Part	**ABB order code**	**Part**	**ABB order code**	**Part**	**ABB order code**	**Part**	**ABB order code**
OVR SL06	7TCA085400R0360	**OVR SL15/M**	7TCA085400R0376	**OVR SL50(UL)**	7TCA085400R0539	**OVR SL180L**	7TCA085400R0425
OVR SL06/I	7TCA085400R0365	**OVR SL15L/M**	7TCA085400R0411	**OVR SL50/I(UL)**	7TCA085400R0540	**OVR SL180**	7TCA085400R0424
OVR SL06L	7TCA085400R0366	**OVR SL15/M(UL)**	7TCA085400R0597	**OVR SL50L(UL)**	7TCA085400R0541	**OVR SL180L/I**	7TCA085400R0423
OVR SL06L/I	7TCA085400R0390	**OVR SL15L/M(UL)**	7TCA085400R0598	**OVR SL50L/I(UL)**	7TCA085400R0542	**OVR SL180/I**	7TCA085400R0426
OVR SL06(UL)	7TCA085400R0527	**OVR SL30**	7TCA085400R0363	**OVR SL50/M**	7TCA085400R0378	**OVR SL180(UL)**	7TCA085400R0547
OVR SL06/I(UL)	7TCA085400R0528	**OVR SL30/I**	7TCA085400R0383	**OVR SL50L/M**	7TCA085400R0401	**OVR SL180/I(UL)**	7TCA085400R0548
OVR SL06L(UL)	7TCA085400R0529	**OVR SL30L**	7TCA085400R0368	**OVR SL50/M(UL)**	7TCA085400R0603	**OVR SL180L(UL)**	7TCA085400R0549
OVR SL06L/I(UL)	7TCA085400R0530	**OVR SL30L/I**	7TCA085400R0393	**OVR SL50L/M(UL)**	7TCA085400R0604	**OVR SL180L/I(UL)**	7TCA085400R0550
OVR SL06/M	7TCA085400R0375	**OVR SL30(UL)**	7TCA085400R0535	**OVR SL110**	7TCA085400R0362	**OVR SL180/M**	7TCA085400R0429
OVR SL06L/M	7TCA085400R0399	**OVR SL30/I(UL)**	7TCA085400R0536	**OVR SL110/I**	7TCA085400R0385	**OVR SL180L/M**	7TCA085400R0430
OVR SL06/M(UL)	7TCA085400R0595	**OVR SL30L(UL)**	7TCA085400R0537	**OVR SL110L**	7TCA085400R0370	**OVR SL180/M(UL)**	7TCA085400R0607
OVR SL06L/M(UL)	7TCA085400R0596	**OVR SL30L/I(UL)**	7TCA085400R0538	**OVR SL110L/I**	7TCA085400R0395	**OVR SL180L/M(UL)**	7TCA085400R0608
OVR SL15	7TCA085400R0361	**OVR SL30/M**	7TCA085400R0377	**OVR SL110(UL)**	7TCA085400R0543	**OVR SL/B**	7TCA085400R0320
OVR SL15/I	7TCA085400R0382	**OVR SL30L/M**	7TCA085400R0400	**OVR SL110/I(UL)**	7TCA085400R0544	**OVR SL/I/B**	7TCA085400R0321
OVR SL15L	7TCA085400R0367	**OVR SL30/M(UL)**	7TCA085400R0601	**OVR SL110L(UL)**	7TCA085400R0545	**OVR SLTN**	7TCA085400R0323
OVR SL15L/I	7TCA085400R0391	**OVR SL30L/M(UL)**	7TCA085400R0602	**OVR SL110L/I(UL)**	7TCA085400R0546	**OVR SLTNL**	7TCA085400R0418
OVR SL15(UL)	7TCA085400R0531	**OVR SL50**	7TCA085400R0364	**OVR SL110/M**	7TCA085400R0379	**OVR WBX SLQ**	7TCA085400R0326
OVR SL15/I(UL)	7TCA085400R0532	**OVR SL50/I**	7TCA085400R0384	**OVR SL110L/M**	7TCA085400R0402	**OVR WBX SLQ/G**	7TCA085400R0327
OVR SL15L(UL)	7TCA085400R0533	**OVR SL50L**	7TCA085400R0369	**OVR SL110/M(UL)**	7TCA085400R0605		
OVR SL15L/I(UL)	7TCA085400R0534	**OVR SL50L/I**	7TCA085400R0394	**OVR SL110L/M(UL)**	7TCA085400R0606		

ABB Limited
Wilford Road - Nottingham
NG2 1EB UK
Tel: +44 (0) 115 964 3700

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilisation of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG. Copyright© 2020 ABB All rights reserved

Protection and safety

Data & signal protection

OVR SL X Series

LPZ 0→3 | FULL MODE Bonding + Equipment Protection | LED OPTIONAL INDICATION | SIGNAL/ TELECOM TEST CAT D + C + B | ENHANCED Low let-through voltage | REPLACEABLE PROTECTION MODULE | LOW IN-LINE RESISTANCE 1 Ω

CURRENT RATING 750 mA | ATEX/IEC APPROVED | HIGH BANDWIDTH | ULTRA SLIM 7 mm WIDTH | SIL 3 IEC 61508

Combined Category D, C, B tested protector (to BS EN 61643) suitable for twisted pair signalling applications within hazardous environments (ATEX/ IECEx approved). Available for working voltages of up to 15 and 30 Volts. For use at boundaries up to LPZ 0 to protect against flashover through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Approved for use in hazardous environments for the protection of Intrinsically Safe circuits (Classification: II 2(1)G, Ex ia (ia Ga) IIC T4 Gb)
- Very low let-through voltage (enhanced protection to IEC/ BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Ultra slim 7 mm width ideal for compact protection of large numbers of lines (e.g. process control installations)
- Optional LED status indication versions available for low current DC power applications
- Negligible self-capacitance and self-inductance offering minimal interference when protecting Intrinsically Safe circuits
- Very low (1 Ω) in-line resistance allows resistance critical applications (e.g. alarm loops) to be protected
- High (750 mA) maximum running current
- High bandwidth enables higher frequency (high traffic or bit rate) data communications
- Screen terminal enables easy connection of cable screen to earth
- Suitable for earthed or isolated screen systems - add /I suffix to part number for versions that require isolated screens
- Built-in innovative DIN rail foot with locking feature for simple positioning and clip-on mounting to top hat DIN rails
- 4 mm2 terminals allow for larger cross section wiring, stranded wires terminated with ferrules or fitting two wires into a single terminal
- Evaluated for SIL to IEC 61508
- Approval references for OVR SL X Series: IECEx SIR 10.0030X, Sira 10ATEX2063X
- The certificate numbers have an 'X' suffix, which indicates that the certificates contain the following 'Specific conditions of use': The equipment is not capable of passing a 500 V r.m.s. a.c. electric strength test in accordance with Clause 6.3.12 of EN 60069-11:2007 between its intrinsically safe circuits and its DIN rail clip (which is intended to be earthed). This shall be taken into account when this equipment is being installed.
- The equipment enclosure shall only be cleaned using a damp cloth

Application

Use these protectors in hazardous environments where installation space is at a premium and large numbers of lines require protection (e.g. process control, 4-20 mA loops, fire and gas detectors and shut-down systems). Suitable for high speed digital communication equipment or systems with long signal lines. See Application Note OVR AN013.

Installation

Connect in series with the data communication or signal line either near where it enters or leaves the building or close to the equipment being protected (e.g. within its control panel). Either way, it must be very close to the system's earth star point. Install protectors either within an existing cabinet/cubicle or in a separate enclosure.

Accessories

Replacement modules:
OVR SL15X/M, OVR SL30X/M
Standard module replacement for 15 and 30 V protectors respectively
OVR SL15XL/M, OVR SL30XL/M
LED module replacement for 15 and 30 V protectors respectively
OVR SLX/B Base replacement (common for standard and LED modules)

OVR SLX/I/B
Base replacement with isolated screen from earth

Weatherproof enclosure:
OVR WBX SLQ

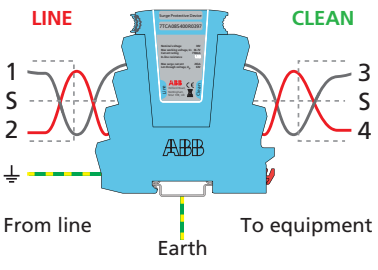

NOTE: Use the standard OVR SL 'Slim Line' Series for non-hazardous areas. The OVR SL Series is also available for protection of 3-wire, RS 485, RTD & telecommunication applications (OVR SL/3W, OVR SL RS485, OVR SL RTD & OVR SL TN).

Protection and safety

Data & signal protection

OVR SL X Series

OVR SL X Series - Technical specification

Electrical specification	OVR SL15X	OVR SL30X
ABB order code	7TCA085400R0386	7TCA085400R0387
Nominal voltage[1]	15 V	30 V
Maximum working voltage U_c (DC)[2]	16.7 V	36.7 V
Maximum working voltage U_c (AC RMS)	11 V	25 V
Current rating (signal)	750 mA	
In-line resistance (per line ±10%)	1.0 Ω	
Bandwidth (-3 dB 50 Ω system)	45 MHz	
Intrinsically safe specification	**OVR SL15X**	**OVR SL30X**
Maximum voltage *Ui*	30 V	
Maximum power *Pi*: – Per -40 °C < Ta < 40 °C – Per -40 °C < Ta < 60 °C – Per -40 °C < Ta < 80 °C	1.3 W 1.2 W 1.0 W	
Capacitance *Ci*	0 µF	
Inductance *Li*	0 µH	
Certificate number	IECEx SIR 10.0030X, Sira 10ATEX2063X	
Classification	Ex II 2 (1) G, Ex ia (ia Ga) IIC T4 Gb	
Transient specification	**OVR SL15X**	**OVR SL30X**
Let-through voltage (all conductors)[3] *Up*		
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21	38.4 V	63.0 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21	29.4 V	51.3 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21	26.8 V	45.4 V
5 kV, 10/700 µs[4]	27.5 V	46.3 V
Maximum surge current		
D1 test 10/350 µs to BS EN/EN/IEC 61643-21: – Per signal wire – Per pair	1.25 kA 2.5 kA	
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002: – Per signal wire – Per pair	5 kA 10 kA	
Mechanical specification	**OVR SL15X**	**OVR SL30X**
Temperature range	-40 to +80 °C	
Connection type	Screw terminal - maximum torque 0.8 Nm	
Conductor size (stranded)	4 mm2	
Earth connection	Via DIN rail or 4 mm2 earth terminal - maximum torque 0.8 Nm	
Case material	FR Polymer UL-94 V-0	
Weight: – Unit	0.08 kg	
SIL (Safety Integrity Level) to IEC 61508	SIL 3[5]	
Dimensions	See diagram below	

[1] Nominal voltage (RMS/DC or AC peak) measured at < 10 µA
[2] Maximum working voltage (RMS/DC or AC peak) measured at < 1 mA leakage
[3] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
[4] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45, Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

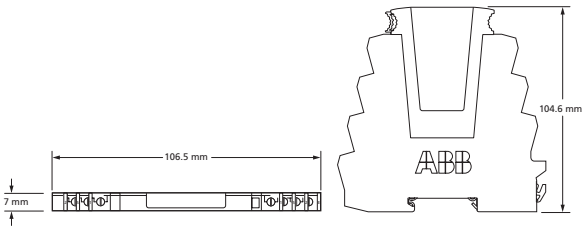

ABB order codes

Part	ABB order code	Part	ABB order code
OVR SL15X	7TCA085400R0386	**OVR SL30X**	7TCA085400R0387
OVR SL15X/I	7TCA085400R0388	**OVR SL30X/I**	7TCA085400R0392
OVR SL15XL	7TCA085400R0396	**OVR SL30XL**	7TCA085400R0397
OVR SL15XL/I	7TCA085400R0389	**OVR SL30XL/I**	7TCA085400R0398
OVR SL15X/M	7TCA085400R0380	**OVR SL30X/M**	7TCA085400R0381
OVR SL15XL/M	7TCA085400R0404	**OVR SL30XL/M**	7TCA085400R0403
OVR SLX/B	7TCA085400R0325	**OVR WBX SLQ**	7TCA085400R0326
OVR SLX/I/B	7TCA085400R0374	**OVR WBX SLQ/G**	7TCA085400R0327

Protection and safety

Data & signal protection

OVR D Series

LPZ 0→3 | FULL MODE Bonding + Equipment Protection | SIGNAL TEST CAT D + C + B | ENHANCED Low let-through voltage | LOW IN-LINE RESISTANCE 9.4 Ω | CURRENT RATING 300 mA | GND

Combined Category D, C, B tested protector (to BS EN 61643) suitable for most twisted pair signalling applications. Available for working voltages of up to 6, 15, 30, 50 and 110 Volts. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Low in-line resistance minimizes unnecessary reductions in signal strength
- Strong, flame retardant, ABS housing
- Supplied ready for flat mounting on base or side
- Built-in DIN rail foot for simple clip-on mounting to top hat DIN rails
- Colour coded terminals give a quick and easy installation check - grey for the dirty (line) end and green for the clean end
- Screen terminal enables easy connection of cable screen to earth
- Substantial earth stud to enable effective earthing
- Integral earthing plate for enhanced connection to earth via a OVR CME kit

Application

Use on twisted pair lines, e.g. those found in process control equipment, modems and computer communications interfaces.

Installation

Connect in series with the data communication or signal line either near where it enters or leaves the building or close to the equipment being protected (e.g. within its control panel). Either way, it must be very close to the system's earth star point. Install protectors either within an existing cabinet/cubicle or in a separate enclosure.

Accessories

Combined Mounting/Earthing kits:

OVR CME 4 Mount & earth up to 4 protectors
OVR CME 8 Mount & earth up to 8 protectors
OVR CME 16 Mount & earth up to 16 protectors
OVR CME 32 Mount & earth up to 32 protectors

Weatherproof enclosures:

OVR WBX 4, OVR WBX 4/GS For use with a OVR CME 4 and up to 4 protectors

OVR WBX 8, OVR WBX 8/GS
For use with a OVR CME 8 and up to 8 protectors

OVR WBX 16/2/G
For use with one or two OVR CME 16 and up to 32 protectors

Install in series (in-line)

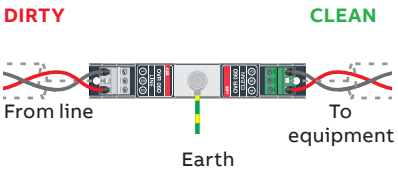

Slim Line (OVR SL) and ATEX (OVR SLX) versions are also available. If your system requires a protector with a very low resistance or higher current, see the OVR E & H Series. Also use the OVR E Series for systems needing a higher bandwidth. Protectors for 3-wire (OVR SL/3W) and RTD (OVR RTD, OVR SL RTD) are available, as are the space saving protectors (OVR Q, OVR SL Series). The OVR KT and TN Series are additional protectors specifically for telephone lines.

Protection and safety

Data & signal protection

OVR D Series

OVR D Series - Technical specification

Electrical specification	OVR 06D	OVR 15D	OVR 30D	OVR 50D	OVR 110D
ABB order code	7TCA085400R0288	7TCA085400R0349	7TCA085400R0351	7TCA085400R0352	7TCA085400R0347
Nominal voltage[1]	6 V	15 V	30 V	50 V	110 V
Maximum working voltage *Uc* (RMS/DC)[2]	5 V / 7.79 V	13 V / 19 V	26 V / 37.1 V	41 V / 58 V	93 V / 132 V
Current rating (signal)	300 mA				
In-line resistance (per line ±10%)	9.4 Ω	9.4 Ω	9.4 Ω	9.4 Ω	9.4 Ω
Bandwidth (-3 dB 50 Ω system)	800 kHz	2.5 MHz	4 MHz	6 MHz	9 MHz
Transient specification	**OVR 06D**	**OVR 15D**	**OVR 30D**	**OVR 50D**	**OVR 110D**
Let-through voltage (all conductors)[3] *Up*					
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21	12.0 V	25.0 V	44.0 V	78.0 V	155 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21	11.5 V	24.5 V	43.5 V	76.0 V	150 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21	10.0 V	23.0 V	42.5 V	73.0 V	145 V
5 kV, 10/700 µs[4]	10.5 V	23.8 V	43.4 V	74.9 V	150 V
Maximum surge current					
D1 test 10/350 µs to BS EN/EN/IEC 61643-21: – Per signal wire	2.5 kA				
– Per pair	5 kA				
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002: – Per signal wire	10 kA				
– Per pair	20 kA				
Mechanical specification	**OVR 06D**	**OVR 15D**	**OVR 30D**	**OVR 50D**	**OVR 110D**
Temperature range	-40 to +80 °C				
Connection type	Screw terminal - maximum torque 0.5 Nm				
Conductor size (stranded)	2.5 mm²				
Earth connection	M6 stud				
Case material	FR Polymer UL-94 V-0				
Weight	0.08 kg				
Dimensions	See diagram below				

[1] Nominal voltage (RMS/DC or AC peak) measured at < 5 µA (OVR 15D, OVR 30D, OVR 50D, OVR 110D) and < 200 µA (OVR 06D)
[2] Maximum working voltage (RMS/DC or AC peak) measured at < 1 mA leakage (OVR 15D, OVR 30D, OVR 50D, OVR 110D), < 10 mA (OVR 06D)
[3] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
[4] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45, Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

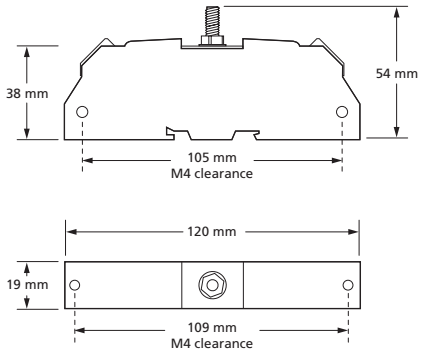

ABB order codes

Part	ABB order code	Part	ABB order code	Part	ABB order code
OVR CME4	7TCA085400R0414	**OVR WBX4**	7TCA085410R0048	**OVR WBX4/GS**	7TCA085410R0049
OVR CME8	7TCA085400R0415	**OVR WBX8**	7TCA085410R0050	**OVR WBX8/GS**	7TCA085410R0051
OVR CME16	7TCA085410R0415	**OVR CME32**	7TCA085410R0046	**OVR WBX16/2/G**	7TCA085410R0047

Protection and safety

Data & signal protection

OVR E Series

LPZ 0→3 | FULL MODE Bonding + Equipment Protection | HIGH BANDWIDTH | SIGNAL/ TELECOM TEST CAT D + C + B | ENHANCED Low let-through voltage | LOW IN-LINE RESISTANCE 1 Ω | CURRENT RATING 1.25 A | GND

Combined Category D, C, B tested protector (to BS EN 61643) suitable for twisted pair signalling applications which require either a lower in-line resistance, an increased current or a higher bandwidth than the OVR D Series. Also suitable for DC power applications less than 1.25 Amps. Available for working voltages of up to 6, 15, 30, 50 and 110 Volts. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Very low (1 Ω) in-line resistance allows resistance critical applications (e.g. alarm loops) to be protected
- High (1.25 A) maximum running current
- High bandwidth enables higher frequency (high traffic or bit rate) data communications
- Screen terminal enables easy connection of cable screen to earth
- Strong, flame retardant, ABS housing
- Built-in DIN rail foot for simple clip-on mounting to top hat DIN rails
- Colour coded terminals give a quick and easy installation check - grey for the dirty (line) end and green for clean
- Substantial earth stud to enable effective earthing
- Supplied ready for flat mounting on base or side
- Integral earthing plate for enhanced connection to earth via OVR CME kit

Application

Use these units to protect resistance sensitive, higher frequency or running current systems, e.g. high speed digital communications equipment or systems with long signal lines.

Installation

Connect in series with the data communication or signal line either near where it enters or leaves the building or close to the equipment being protected (e.g. within its control panel). Either way, it must be very close to the system's earth star point. Install protectors either within an existing cabinet/cubicle or in a separate enclosure.

Accessories

Combined Mounting/Earthing kits:

OVR CME 4 Mount & earth up to 4 protectors
OVR CME 8 Mount & earth up to 8 protectors
OVR CME 16 Mount & earth up to 16 protectors
OVR CME 32 Mount & earth up to 32 protectors

Weatherproof enclosures:

OVR WBX 4, OVR WBX 4/GS
For use with a OVR CME 4 and up to 4 protectors
OVR WBX 8, OVR WBX 8/GS
For use with a OVR CME 8 and up to 8 protectors
OVR WBX 16/2/G
For use with one or two OVR CME 16 and up to 32 protectors

Install in series (in-line)

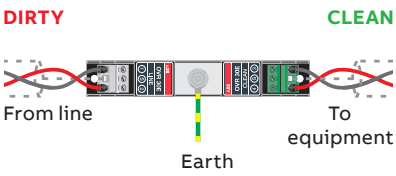

NOTE: Slim Line (OVR SL) and ATEX (OVR SLX) are available. For many twisted pair data and signal applications, the lower cost OVR D Series may be suitable. For applications requiring higher current (1.25 A to 4 A) or ultra-low in-line resistance, the OVR H Series protectors may be more suitable.

Protection and safety

Data & signal protection

OVR E Series

OVR E Series - Technical specification

Electrical specification	OVR 06E	OVR 15E	OVR 30E	OVR 50E	OVR 110E
ABB order code	7TCA085400R0346	7TCA085400R0350	7TCA085400R0353	7TCA085400R0354	7TCA085400R0348
Nominal voltage[1]	6 V	15 V	30 V	50 V	110 V
Maximum working voltage *Uc* (RMS/DC)[2]	5 V / 7.79 V	11 V / 16.7 V	25 V / 36.7 V	40 V / 56.7 V	93 V / 132 V
Current rating (signal)	1.25 A				
In-line resistance (per line ±10%)	1.0 Ω				
Bandwidth (-3 dB 50 Ω system)	45 MHz				
Transient specification	**OVR 06E**	**OVR 15E**	**OVR 30E**	**OVR 50E**	**OVR 110E**
Let-through voltage (all conductors)[3] *Up*					
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21	36.0 V	39.0 V	60.0 V	86.0 V	180 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21	26.2 V	28.0 V	49.0 V	73.5 V	170 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21	16.0 V	25.5 V	43.5 V	65.0 V	160 V
5 kV, 10/700 µs[4]	17.0 V	26.2 V	44.3 V	65.8 V	165 V
Maximum surge current					
D1 test 10/350 µs to BS EN/EN/IEC 61643-21: – Per signal wire – Per pair	2.5 kA 5 kA				
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002: – Per signal wire – Per pair	10 kA 20 kA				
Mechanical specification	**OVR 06E**	**OVR 15E**	**OVR 30E**	**OVR 50E**	**OVR 110E**
Temperature range	-40 to +80 °C				
Connection type	Screw terminal - maximum torque 0.5 Nm				
Conductor size (stranded)	2.5 mm²				
Earth connection	M6 stud				
Case material	FR Polymer UL-94 V-0				
Weight	0.08 kg				
Dimensions	See diagram below				

[1] Nominal voltage (RMS/DC or AC peak) measured at < 10 µA (OVR 15E, OVR 30E, OVR 50E, OVR 110E) and < 200 µA (OVR 06E)
[2] Maximum working voltage (RMS/DC or AC peak) measured at < 5 mA leakage (OVR 15E, OVR 30E, OVR 50E, OVR 110E) and < 10 mA (OVR 06E)
[3] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
[4] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45,Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

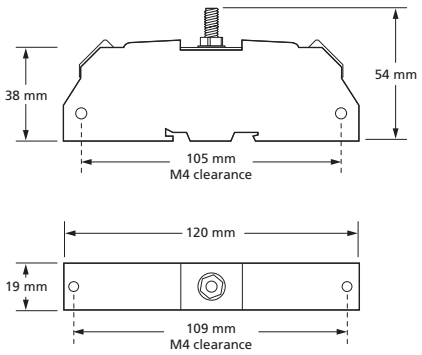

ABB order codes

Part	ABB order code	Part	ABB order code	Part	ABB order code
OVR CME4	7TCA085400R0414	**OVR WBX4**	7TCA085410R0048	**OVR WBX4/GS**	7TCA085410R0049
OVR CME8	7TCA085400R0415	**OVR WBX8**	7TCA085410R0050	**OVR WBX8/GS**	7TCA085410R0051
OVR CME16	7TCA085410R0415	**OVR CME32**	7TCA085410R0046	**OVR WBX16/2/G**	7TCA085410R0047

Protection and safety

Data & signal protection

OVR H Series

LPZ 0→3 | FULL MODE Bonding + Equipment Protection | SIGNAL/ TELECOM TEST CAT D + C + B | ENHANCED Low let-through voltage | LOW IN-LINE RESISTANCE 0.05 Ω | CURRENT RATING 4 A

Combined Category D, C, B tested protector (to BS EN 61643) suitable for twisted pair signalling applications which require either a lower in-line resistance or an increased current than the OVR D or E Series. Also suitable for DC power applications less than 4 Amps. Available for working voltages of up to 6, 15, 30, 50, 110 and 180 Volts. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Ultra-low (< 0.05 Ω) in-line resistance allows resistance critical applications (e.g. alarm loops) to be protected
- Very high (4 A) maximum running current
- Strong, flame retardant ABS housing
- Supplied ready for flat mounting on base or side
- Built-in DIN rail foot for simple clip-on mounting to top hat DIN rails
- Colour coded terminals give a quick and easy installation check - grey for the dirty (line) end and green for clean
- Screen terminal enables easy connection of cable screen to earth
- Substantial earth stud to enable effective earthing
- Integral earth plate enables enhanced connection to earth via OVR CME kit

Application

Use these applications to protect resistance sensitive or higher running current systems, e.g. systems with long signal lines, or DC power applications.

Installation

Connect in series with the data communication or signal line either near where it enters or leaves the building or close to the equipment being protected (e.g. within its control panel). Either way, it must be very close to the system's earth star point. Install protectors either within an existing cabinet/cubicle or in a separate enclosure.

Accessories

Combined Mounting/Earthing kits:
OVR CME 4 Mount & earth up to 4 protectors
OVR CME 8 Mount & earth up to 8 protectors
OVR CME 16 Mount & earth up to 16 protectors
OVR CME 32 Mount & earth up to 32 protectors

Weatherproof enclosures:
OVR WBX 4, OVR WBX 4/GS
For use with a OVR CME 4 and up to 4 protectors
OVR WBX 8, OVR WBX 8/GS
For use with a OVR CME 8 and up to 8 protectors
OVR WBX 16/2/G
For use with one or two OVR CME 16 and up to 32 protectors

Install in series (in-line)

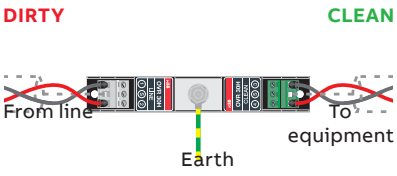

NOTE: For some data and signal applications with lower current, higher in-line resistance or higher bandwidth requirements, the OVR D or E Series protectors or the Slim Line OVR SL Series may be more suitable.

Protection and safety

Data & signal protection

OVR H Series

OVR E Series - Technical specification

	ESP 06H	ESP 15H	ESP 30H	ESP 50H	ESP 110H	ESP 180H
ABB order code	7TCA085400R0003	7TCA085400R0009	7TCA085400R0011	7TCA085400R0012	7TCA085400R0008	7TCA085400R0492
Nominal voltage[1]	6 V	15 V	30 V	50 V	110 V	180 V
Maximum working voltage U_c (DC)[2]	7.79 V	16.7 V	36.7 V	56.7 V	132 V	190 V
Maximum working voltage U_c (AC RMS)	5 V	11 V	25 V	40 V	93 V	130 V
Current rating (signal)	4 A					
In-line resistance (per line ±10%)	0.05 Ω					
Bandwidth (-3 dB 50 Ω system)	160 KHz	140 KHz	130 KHz	120 KHz	120 KHz	100 KHz
Transient specification	**ESP 06H**	**ESP 15H**	**ESP 30H**	**ESP 50H**	**ESP 110H**	**ESP 180H**
Let-through voltage (all conductors)[3] *Up*						
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21	12.0 V	27.5 V	46.0 V	67.0 V	150 V	215 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21	11.0 V	26.5 V	45.0 V	66.5 V	145 V	205 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21	10.5 V	25.5 V	43.5 V	65.0 V	140 V	203 V
5 kV, 10/700 µs(4)	10.8 V	26.2 V	44.3 V	65.8 V	145 V	200 V
Maximum surge current						
D1 test 10/350 µs to signal wire – Per	2.5 kA					
BS EN/EN/IEC 61643-21: – Per pair	5 kA					
8/20 µs to ITU-T K.45:2003, signal wire – Per	10 kA					
IEEE C62.41.2:2002: – Per pair	20 kA					
Mechanical specification	**ESP 06H**	**ESP 15H**	**ESP 30H**	**ESP 50H**	**ESP 11H**	**ESP 180H**
Temperature range						-40 to +80 °C
Connection type						Screw terminal - maximum torque 0.5 Nm
Conductor size (stranded)						2.5 mm²
Earth connection						M6 stud - maximum torque 0.5 Nm
Case material						FR Polymer UL-94 V-0
Weight: – Unit						0.08 kg
Dimensions						See diagram below

[1] Nominal voltage (RMS/DC or AC peak) measured at < 10 µA (OVR 15H, OVR 30H, OVR 50H, OVR 110H) and < 200 µA (OVR 06H)
[2] Maximum working voltage (RMS/DC or AC peak) measured at < 5 mA leakage (OVR 15H, OVR 30H, OVR 50H, OVR 110H) and < 10 mA (OVR 06H)
[3] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
[4] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45,Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

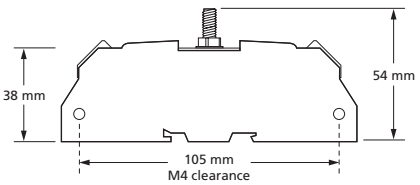

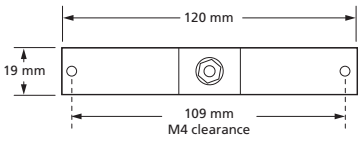

Part	ABB order code
CME4	7TCA085400R0001
CME32	7TCA085410R0003
WBX 3/G	7TCA085410R0024
WBX 8	7TCA085410R0030
CME8	7TCA085400R0002
WBX 2/G	7TCA085410R0022
WBX 4	7TCA085410R0027
WBX 8/GS	7TCA085410R0031
CME16	7TCA085410R0002
WBX 3	7TCA085410R0023
WBX 4/GS	7TCA085410R0028
WBX 16/2/G	7TCA085410R0020

Protection and safety

Data & signal protection

OVR SL 3-Wire Series

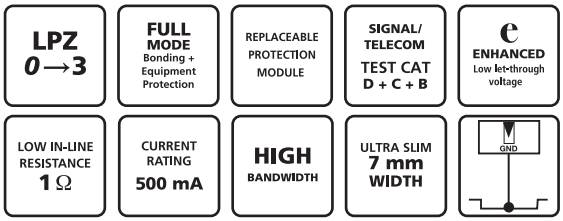

Combined Category D, C, B tested protector (to BS EN 61643) suitable for 3-wire signalling applications which require either a lower in-line resistance, an increased current and/or higher bandwidth. Also suitable for DC power applications less than 0.5 Amps. Available for working voltages of up to 6, 15, 30, 50 and 110 Volts. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Ultra slim 7 mm width ideal for compact protection of large numbers of lines (e.g. process control installations)
- Two stage removable protection module with simple quick release mechanism allowing partial removal for easy line commissioning and maintenance as well as full removal for protection replacement
- Very low (1 Ω) in-line resistance allows resistance critical applications (e.g. alarm loops) to be protected
- High (500 mA) maximum running current
- High bandwidth enables higher frequency (high traffic or bit rate) data communications
- Strong, flame retardant, polycarbonate housing
- Built-in innovative DIN rail foot with locking feature for simple positioning and clip-on mounting to top hat DIN rails
- 4 mm² terminals allow for larger cross section wiring, stranded wires terminated with ferrules or fitting two wires into a single terminal
- Convenient earthing through DIN foot and/or earth terminal

Application

Use these protectors for 3-wire systems where installation space is at a premium and large numbers of lines require protection (e.g. process control, high speed digital communication equipment or systems with long signal lines).

Installation

Connect in series with the data communication or signal line either near where it enters or leaves the building or close to the equipment being protected (e.g. within its control panel). Either way, it must be very close to the system's earth star point. Install protectors either within an existing cabinet/cubicle or in a separate enclosure.

Accessories

CReplacement modules:
OVR SLXX/3W/M
Standard module replacement where XX is voltage rating (06, 15, 30, 50 or 110)
OVR SL/3W/B
Base replacement

Weatherproof enclosure:
OVR WBX SLQ

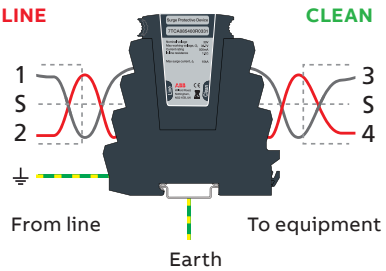

NOTE: The OVR SL 'Slim Line' Series is also available for protection of 2-wire systems up to 110 V, RS 485, RTD and telecommunication applications (OVR SL Series, OVR SL RS485, OVR SL RTD and OVR SL TN). The OVR SL X Series has approvals for use in hazardous areas.

Protection and safety

Data & signal protection

OVR SL 3-Wire Series

OVR SL 3-Wire Series - Technical specification

Electrical specification	**OVR SL06/3W**	**OVR SL15/3W**	**OVR SL30/3W**	**OVR SL50/3W**	**OVR SL110/3W**
ABB order code	7TCA085400R0328	7TCA085400R0330	7TCA085400R0331	7TCA085400R0332	7TCA085400R0329
Nominal voltage[1]	6 V	15 V	30 V	50 V	110 V
Maximum working voltage *Uc* (RMS/DC)[2]	5 V / 7.79 V	11 V / 16.7 V	25 V / 36.7 V	40 V / 56.7 V	93 V / 132 V
Current rating (signal)	500 mA				
In-line resistance (per line ±10%)	1.0 Ω				3.3 Ω
Bandwidth (-3 dB 50 Ω system)	45 MHz				
Transient specification	**OVR SL06/3W**	**OVR SL15/3W**	**OVR SL30/3W**	**OVR SL50/3W**	**OVR SL110/3W**
Let-through voltage (all conductors)[3] *Up*					
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21	36.0 V	38.4 V	63.0 V	90.3 V	185 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21	26.2 V	29.4 V	51.3 V	77.2 V	175 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21	16.0 V	26.8 V	45.4 V	68.3 V	165 V
5 kV, 10/700 µs[4]	17.0 V	27.5 V	46.3 V	69.1 V	170 V
Maximum surge current					
D1 test 10/350 µs to BS EN/EN/IEC 61643-21: – Per signal wire	1.25 kA				
D1 test 10/350 µs to BS EN/EN/IEC 61643-21: – Per pair	2.5 kA				
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002: – Per signal wire	5 kA				
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002: – Per pair	10 kA				
Mechanical specification	**OVR SL06/3W**	**OVR SL15/3W**	**OVR SL30/3W**	**OVR SL50/3W**	**OVR SL110/3W**
Temperature range	-40 to +80 °C				
Connection type	Screw terminal - maximum torque 0.8 Nm				
Conductor size (stranded)	4 mm²				
Earth connection	Via DIN rail or 4 mm² earth terminal - maximum torque 0.8 Nm				
Case material	FR Polymer UL-94 V-0				
Weight: – Unit	0.08 kg				
Dimensions	See diagram below				

[1] Nominal voltage (RMS/DC or AC peak) measured at < 10 µA (OVR SL15/3W, OVR SL30/3W, OVR SL50/3W, OVR SL110/3W) and < 200 µA (OVR SL06/3W)
[2] Maximum working voltage (RMS/DC or AC peak) measured at < 1 mA leakage
[3] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
[4] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45, Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

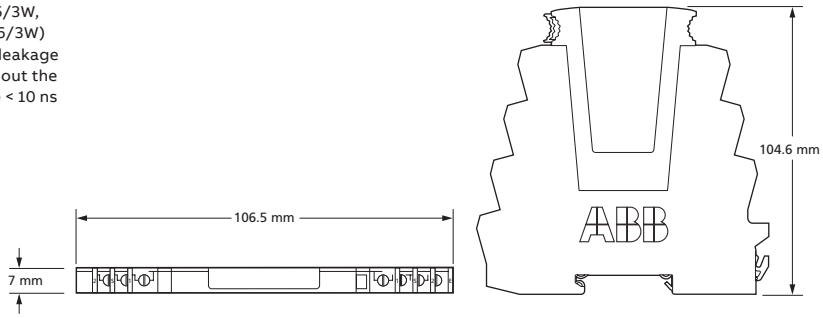

ABB order codes

Part	**ABB order code**	**Part**	**ABB order code**
OVR SL06/3W	7TCA085400R0328	**OVR SL50/3W**	7TCA085400R0332
OVR SL06/3W/M	7TCA085400R0405	**OVR SL50/3W/M**	7TCA085400R0409
OVR SL15/3W	7TCA085400R0330	**OVR WBX SLQ/G**	7TCA085400R0327
OVR SL15/3W/M	7TCA085400R0406	**OVR SL110/3W**	7TCA085400R0329
OVR WBX SLQ	7TCA085400R0326	**OVR SL110/3W/M**	7TCA085400R0408
OVR SL30/3W	7TCA085400R0331	**OVR SL/B**	7TCA085400R0320
OVR SL30/3W/M	7TCA085400R0407	**OVR SL/I/B**	7TCA085400R0321

Protection and safety

Data & signal protection

OVR SL LED 4-20 mA Series

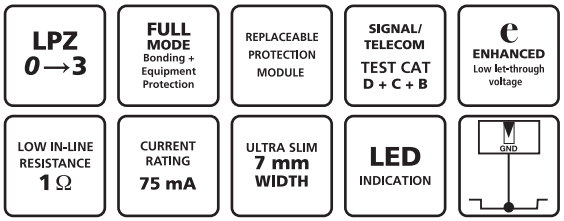

Combined Category D, C, B tested protector (to BS EN 61643) suitable for twisted pair 4-20 mA loop systems with innovative LED protector status indication. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment (e.g. transmitters, monitors, controllers).

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Innovative LED indication of protection status provides easy visual checking and quick maintenance
- Ultra slim 7 mm width ideal for compact protection of large numbers of lines (e.g. process control installations)
- Two stage removable protection module with simple quick release mechanism allowing partial removal for easy line commissioning and maintenance as well as full removal for protection replacement
- Very low (1 Ω) in-line resistance for minimal system interference
- High (75 mA) maximum running current - can also be used on 10-50 mA systems (e.g. process control)
- Screen terminal enables easy connection of cable screen to earth
- Strong, flame retardant, polycarbonate housing
- Built-in innovative DIN rail foot with locking feature for simple positioning and clip-on mounting to top hat DIN rails
- 4 mm² terminals allow for larger cross section wiring, stranded wires terminated with ferrules or fitting two wires into a single terminal
- Convenient earthing through DIN foot and/or earth terminal

Application

Use these protectors on 4-20 mA loop systems - ideal where installation space is at a premium and large numbers of lines require protection, or for systems with long signal lines.

Installation

Connect in series with the 4-20 mA current loop either near where it enters or leaves the building or close to the equipment being protected (e.g. within its control panel). Either way, it must be very close to the system's earth star point. Install protectors either within an existing cabinet/ cubicle or in a separate enclosure.

Accessories

OVR SL30L/4-20/M
Module replacement
OVR SL/B
Base replacement

Weatherproof enclosure:
OVR WBX SLQ

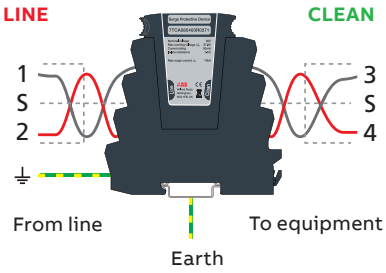

TECHNICAL NOTE: 4-20 mA current loops can serve multiple devices over a long distance. The devices and wiring produce a voltage drop (also known as "loop drops") but these do not reduce the 4-20 mA current as long as the power supply voltage is greater than the sum of the voltage drops around the loop at the maximum signalling current of 20 mA.For design considerations, each OVR SL30L/4-20 device installed within the loop introduces a 1.7 V loop drop.

NOTE: The OVR SL 'Slim Line' Series is also available for protection of systems up to 110 V as well as 3-wire, RS 485, RTD & telecommunication applications (OVR SL/3W, OVR SL RS485, OVR SL RTD & OVR SL TN). The OVR SL X Series has approvals for use in hazardous areas.

Protection and safety

Data & signal protection

OVR SL LED 4-20 mA Series

OVR SL LED 4-20 mA Series - Technical specification

Electrical specification	OVR SL30L/4-20
ABB order code	7TCA085400R0371
Nominal voltage(1)	30 V
Maximum working voltage *Uc* (RMS/DC)(2)	25 V / 36.7 V
Current rating (signal)(3)	75 mA
In-line resistance (per line ±10%)	1.0 Ω
Series voltage drop(4)	1.7 V
Bandwidth (-3 dB 50 Ω systems)	45 MHz
Transient specification	**OVR SL30L/4-20**
Let-through voltage (all conductors)(5) Up	
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21	63.0 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21	51.3 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21	45.4 V
5 kV, 10/700 µs(6)	46.3 V
Maximum surge current	
D1 test 10/350 µs to BS EN/EN/IEC 61643-21: – Per signal wire – Per pair	1.25 kA 2.5 kA
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002: – Per signal wire – Per pair	5 kA 10 kA
Mechanical specification	**OVR SL30L/4-20**
Temperature range	-40 to +80 °C
Connection type	Screw terminal - maximum torque 0.8 Nm
Conductor size (stranded)	4 mm²
Earth connection	Via DIN rail or 4 mm² earth terminal - maximum torque 0.8 Nm
Case material	FR Polymer UL-94 V-0
Weight: – Unit	0.08 kg
Dimensions	See diagram below

(1) Nominal voltage (RMS/DC or AC peak) measured at < 10 µA
(2) Maximum working voltage (RMS/DC or AC peak) measured at < 1 mA leakage
(3) The minimum current for LED indicator operation is 2 mA
(4) At 20 mA
(5) The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
(6) Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45, Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

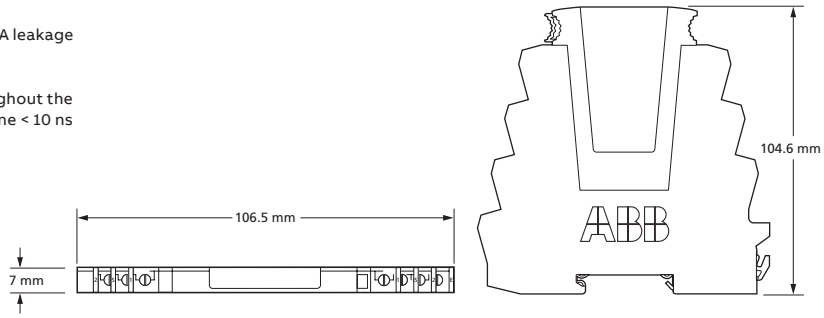

ABB order codes

Part	ABB order code	Part	ABB order code
OVR SL30L/4-20	7TCA085400R0371	**OVR SL/B**	7TCA085400R0320
OVR SL30L/4-20/I	7TCA085400R0372	**OVR SL/I/B**	7TCA085400R0321
OVR SL30L/4-20/M	7TCA085400R0373	**OVR WBX SLQ**	7TCA085400R0326

Protection and safety

Data & signal protection

OVR Q Series

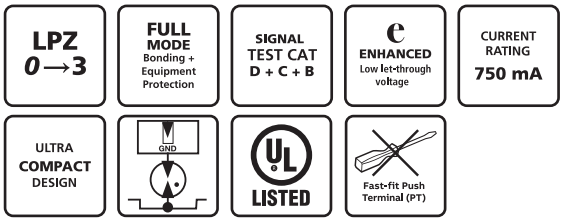

Combined Category D, C, B (to IEC/EN 61643) Surge Protective Device (SPD) suitable for 4 twisted pair lines. Available for working voltages of up to 6, 15, 30, 50, 110 and 180 Volts. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Almost twice as space efficient as smallest competitor
- Standard DIN module (18 mm) depth
- Removable (plug-in) terminals allow pre-wiring of cable looms, for easier installation
- Suitable for earthed or isolated screen systems
- Built-in DIN rail foot for clip-on mounting to top hat or G DIN rails
- Optional flat mounting on side
- 2.5 mm² terminals allow for larger cross section wiring, stranded wires terminated with ferrules or fitting two wires into a single terminal
- Fast fit screwless Push Terminal versions (OVR X/PT) allow quick tool-less cable connection saving installation time
- Very low resistance to minimizes unwanted signal strength reductions
- Strong, flame retardant, ABS housing
- Colour coded terminals (grey for line, green for clean) give a quick and easy installation check
- Screen terminal enables easy connection of cable screen, maintaining continuity through the SPD between the input and output connectors.
- Simple, yet substantial, connection to earth via DIN rail
- OVR 06Q-180Q (and /PT variants) have UL497b approval under E240341

Application

Use these SPDs where installation space is at a premium and large numbers of lines require protection.

Installation

Connect in series with the signal or data line either near where it enters or leaves the building or close to the equipment being protected. Install in a cabinet/cubicle close to the system's earth star point.

Accessories

Weather proof enclosures:
OVR WBX SLQ (with transparent lid)
ABB order code
7TCA085400R0326

OVR WBX SLQ/G (with opaque grey lid)
ABB order code
7TCA085400R0327

OVR 06Q, OVR 15Q, OVR 30Q, OVR 50Q and OVR 110Q installed in series (in-line)

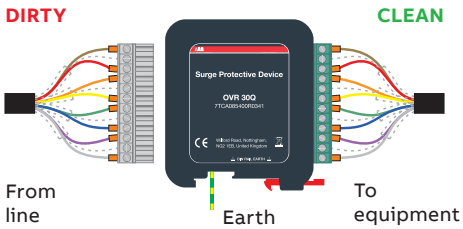

NOTE: The OVR Q Series is also available for protection of RS 485 and RTD applications (OVR RS485Q, OVR RTDQ). Protectors for individual data and signal lines are available (OVR D Series and Slim Line OVR SL Series). Alternatively, for individual protectors with higher current or bandwidth use the OVR E and OVR H Series. For telecommunication applications use OVR TNQ Series.

Protection and safety

Data & signal protection

OVR Q Series

OVR Q Series - Technical specification

Electrical specification	OVR 06Q Series	OVR 15Q Series	OVR 30Q Series	OVR 50Q Series	OVR 110Q Series	OVR 180Q Series
Nominal voltage[1]	6 V	15 V	30 V	50 V	110 V	180 V
Maximum working voltage *Uc* (RMS/DC)[2]	5 V / 7.79 V	13 V / 18.8 V	26 V / 37.8 V	41 V / 57.8 V	93 V / 132 V	130 V/190 V
Current rating (signal)	750 mA				500 mA	250 mA
In-line resistance (per line ±10%)	1.0 Ω				3.3 Ω	6.8 Ω
Bandwidth (-3 dB 50 Ω system)	45 MHz					
Transient specification						
Let-through voltage (all conductors)[3] Up						
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21	15.0 V	28.0 V	53.0 V	84.0 V	188 V	215 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21	12.5 V	26.5 V	48.0 V	76.0 V	175 V	205 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21	10.0 V	23.0 V	43.5 V	64.5 V	145 V	203 V
5 kV, 10/700 µs[4]	10.8 V	26.2 V	44.3 V	65.8 V	150 V	200 V
Maximum surge current						
D1 test 10/350 µs to BS EN/EN/IEC 61643-21: – Per signal wire – Per pair	2.5 kA 5 kA					
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002: – Per signal wire – Per pair	10 kA 20 kA					
Mechanical specification						
Temperature range	-40 to +80 °C					
Connection type	Pluggable 12 way screw terminal - maximum torque 0.6 Nm /PT version: Pluggable 12 way screwless Push Terminal					
Conductor size (stranded)	2.5 mm^2					
Earth connection	Via DIN rail or M5 threaded hole in base of unit					
Case material	FR Polymer UL-94 V-0					
Weight: – Unit – Packaged (each)	0.1 kg 0.12 kg					
Dimensions	See diagram below					

[1] Nominal voltage (RMS/DC or AC peak) measured at < 5 µA (OVR 15Q, OVR 30Q, OVR 50Q, OVR 110Q) and < 200 µA (OVR 06Q)
[2] Maximum working voltage (RMS/DC or AC peak) measured at < 5 mA leakage (OVR 15Q, OVR 30Q, OVR 50Q, OVR 110Q)
[3] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
[4] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45, Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

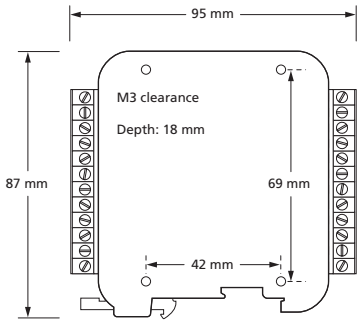

ABB order codes

Part	ABB order code	Part	ABB order code	Part	ABB order code
OVR RS485	7TCA085400R0311	**OVR RS485Q(UL)**	7TCA085400R0572	**OVR CME8**	7TCA085400R0415
OVR SLRS485/B	7TCA085400R0316	**OVR RS485Q/PT(UL)**	7TCA085400R0579	**OVR CME32**	7TCA085410R0046
OVR SLRS485	7TCA085400R0310	**OVR SLRS485/M**	7TCA085400R0317	**OVR WBXSLQ**	7TCA085400R0326
OVR SLRS485L	7TCA085400R0417	**OVR SLRS485L/M**	7TCA085400R0470	**OVR WBXSLQ/G**	7TCA085400R0327
OVR SLRS485(UL)	7TCA085400R0551	**OVR SLRS485L/M(UL)**	7TCA085400R0600	**WBX 4**	7TCA085410R0027
OVR SLRS485L(UL)	7TCA085400R0552	**OVR CME4**	7TCA085400R0414	**WBX 8**	7TCA085410R0030
OVR RS485Q	7TCA085400R0312	**OVR CME16**	7TCA085410R0045	**WBX 16/2/G**	7TCA085410R0020

Protection and safety

Data & signal protection

OVR RTD, RTDQ & SL RTD Series

LPZ 0→3 | FULL MODE Bonding + Equipment Protection | OVR SL RTD ULTRA SLIM 7 mm WIDTH | SIGNAL/ TELECOM TEST CAT D + C + B | ENHANCED Low let-through voltage | OVR RTDQ ULTRA COMPACT 18 mm WIDTH | LOW IN-LINE RESISTANCE | OVR SL RTD HIGH BANDWIDTH

Combined Category D, C, B tested protector (to BS EN 61643) suitable for 3-wire RTD systems to protect monitoring equipment. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3. Available as standard OVR RTD format, or compact OVR RTDQ and Slim Line OVR SL RTD versions for installations where a high number of lines require protection.

Features & benefits

- Protects all three wires on a 3-wire RTD system with a single protector
- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Low in-line resistance minimizes reductions in signal strength
- Built-in DIN rail foot for simple mounting to top hat DIN rails
- Convenient earthing through DIN foot and/or earth terminal
- OVR RTD can be flat mounted on base or side
- OVR RTD and OVR RTDQ have colour coded terminals for quick and easy installation check
- OVR SL RTD has ultra slim 7mm width ideal for compact protection of large numbers of lines (e.g. process control installations)
- OVR SL RTD includes two stage removable protection module with simple quick release mechanism allowing partial removal for easy line commissioning and maintenance as well as full removal for protection replacement

For further information on RTD applications, see separate Application Note OVR AN001 (contact us for a copy).

Installation

Connect in series with the signal line either near where it enters or leaves the building or close to the equipment being protected ensuring it is very close to the system's earth star point. Install protectors either within an existing cabinet/cubicle or in a separate enclosure.

Accessories

Replacement module for OVR SL RTD:
OVR SLRTD/M
Standard module replacement
OVR SLRTD/B
Base replacement

Combined Mounting/Earthing kits for OVR RTD:
OVR CME 4 For up to 4 x OVR RTD
OVR CME 8 For up to 8 x OVR RTD
OVR CME 16 For up to 16 x OVR RTD
OVR CME 32 For up to 32 x OVR RTD

If protectors cannot be incorporated within an existing panel or enclosure, OVR WBX enclosures are available for up to 4, 8, 16 or 32 protectors and their associated OVR CME kit.

Weatherproof enclosure:
OVR WBX SLQ (OVR SLRTD and OVR RTD Q)

OVR RTD installed in series

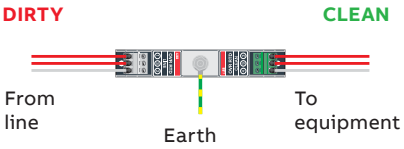

OVR RTDQ installed in series (in-line)

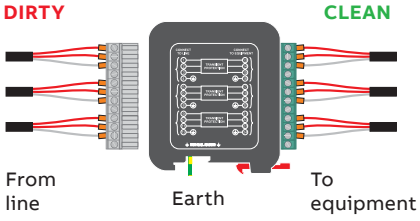

OVR SL RTD installed in series

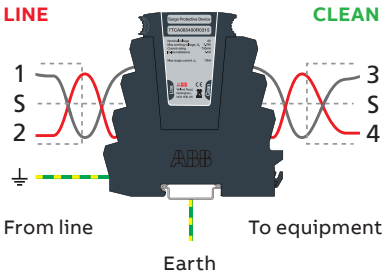

NOTE: For 2-wire or 4-wire RTD applications, use one or two OVR 06D or OVR SL06 protectors respectively.

Protection and safety

Data & signal protection

OVR RTD Series

OVR RTD, RTDQ & SL RTD Series - Technical specification

Electrical specification		OVR RTD	OVR SL RTD	OVR RTDQ
ABB order code		7TCA085400R0313	7TCA085400R0315	7TCA085400R0314
Nominal voltage [1]		6 V		
Maximum working voltage Uc (RMS/DC) [2]		5 V/7.79 V		
Current rating (signal)		200 mA	500 mA	700 mA
In-line resistance (per line ±10%)		10 Ω	1.0 Ω	1.0 Ω
Bandwidth (-3 dB 50 Ω system)		800 kHz	1.5 MHz	800 kHz
Transient specification		**OVR RTD**	**OVR SL RTD**	**OVR RTDQ**
Let-through voltage (all conductors) [3] Up				
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21		12.0 V	17.9 V	15.0 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21		11.5 V	12.1 V	12.5 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21		10.0 V	11.0 V	10.0 V
5 kV, 10/700 µs [4]		10.5 V	11.3 V	10.5 V
Maximum surge current				
D1 test 10/350 µs to BS EN/EN/IEC 61643-21	– Per signal wire	2.5 kA	1.25 kA	2.5 kA
	– Per pair	5 kA	2.5 kA	5 kA
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002	– Per signal wire	10 kA		
	– Per pair	20 kA		
Mechanical specification		OVR RTD	OVR SL RTD	OVR RTDQ
Temperature range		-40 to +80 °C		
Connection type		Screw terminal - max. torque 0.5 Nm	Screw terminal - max. torque 0.8 Nm	Pluggable 12 way screw terminal
Conductor size (stranded)		2.5 mm^2	4 mm^2	2.5 mm^2
Earth connection		M6 stud - max. torque 0.5 Nm	Via DIN rail or 4 mm^2 earth terminal - max. torque 0.8 Nm	Via DIN rail or M5 threaded hole in base of unit - max. torque 0.6 Nm
Case Material		FR Polymer UL-94 V-0		
Weight	– Unit	0.08 kg	0.08 kg	0.1 kg
	– Packaged (per 10)	0.85 kg	0.85 kg	1.3 kg
Dimensions		See diagram below		

OVR RTD

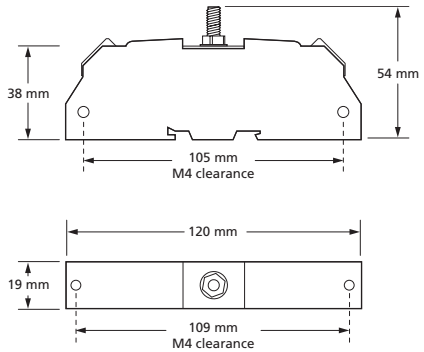

OVR RTDQ



OVR SL RTD

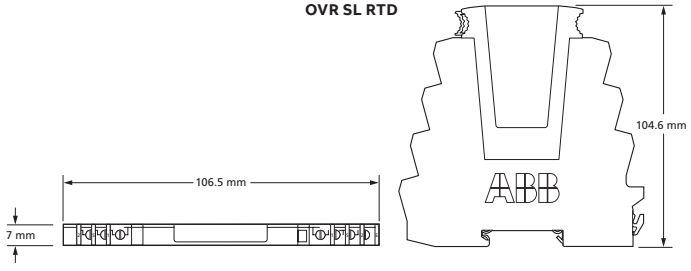

[1] Nominal voltage (RMS/DC or AC peak) measured at < 200 µA
[2] Maximum working voltage (RMS/DC or AC peak) measured at < 10 mA
[3] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
[4] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45,Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

Protection and safety

Telecoms & computer line protection
OVR KT & KE Series

LPZ 0→3 | FULL MODE Bonding + Equipment Protection | SIGNAL/ TELECOM TEST CAT D + C + B | ENHANCED Low let-through voltage | HIGH BANDWIDTH | LOW IN-LINE RESISTANCE 4.4 Ω | GND

Combined Category D, C, B tested protector (to BS EN 61643) suitable for use on ten line LSA-PLUS disconnection modules to PBX telephone exchanges, ISDN and other telecoms equipment with LSA-PLUS disconnection modules. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Low cost protection for large numbers of data and signal lines
- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Colour of housing distinguishes electrically different protectors - avoids confusion when installed together on the same distribution frame
- Quick and easy plug-in installation, with ‘bump’ location feedback
- Under power line cross conditions/PTC versions offer safe disconnection during fault duration. Unit auto-resets once fault corrected
- At larger installations OVR K10T1 and OVR K10T1/PTC provide all in one protection for all ten lines on LSA-PLUS disconnection modules
- Use the OVR KE10 to provide trouble free earthing for up to ten OVR KT1 and OVR KT1/PTC (per disconnection module)
- OVR K10T1 and OVR K10T1/PTC have an integral earth connection, and an external M4 earth bush for use with non-metallic LSA-Plus frames
- OVR KT1/PTC and OVR K10T1/PTC have resettable overcurrent protection and are rated for power cross faults
- OVR KT1, OVR KT1/PTC, OVR K10T1 and OVR K10T1/PTC are suitable for telecoms applications in accordance with Telcordia and ANSI Standards

Application

- For PSTN (e.g POTS, dial-up, lease line, T1/E1, *DSL and Broadband) and U interface ISDN lines, use OVR KT1 (or OVR KT1/PTC) and OVR K10T1 (or OVR K10T1/PTC)
- Protect single lines with OVR KT1 or OVR KT1/PTC
- Protect all ten lines on a disconnection module with OVR K10T1 or OVR K10T1/PTC

Installation

Install protectors on all lines that enter or leave each building (including extensions to other buildings). Identify the lines requiring protection and plug-in the protector (ensuring the correct orientation) for a series connection. Plug OVR K10T1 or OVR K10T1/PTC directly into each disconnection module requiring protection.

OVR KT1 and OVR KT1/PTC must be installed via the OVR KE10 earth bar. Clip an OVR KE10 on to the disconnection module and plug an OVR KT1 or OVR KT1/PTC in to each line on the module that needs protecting. In the unlikely situation that the protector is damaged, it will sacrifice itself and fail short circuit, taking the line out of commission, indicating it needs replacing and preventing subsequent transients from damaging equipment.

For further information on global telephony applications, see separate Application Note OVR AN005 (contact us for a copy).

NOTE: For individual telephone lines and lines at unmanned sites the high performance OVR TN or plug-in OVR TN/JP or OVR TN/RJ11 Series should be used.
For plug-in S/T interface ISDN protection, use the ISDN Series protectors.

Protection and safety

Telecoms & computer line protection

OVR KT & KE Series

OVR KT & KE Series - Technical specification

Electrical specification		**OVR KT1**	**OVR KT1/PTC**	**OVR K10T1**	**OVR K10T1/PTC**
ABB order code		7TCA085400R0305	7TCA085400R0306	7TCA085400R0307	7TCA085400R0410
Maximum working voltage Uc [1]	– line to line	296 V	296 V	296 V	296 V
	– line to earth	296 V	296 V	296 V	296 V
Current rating (signal)		300 mA	145 mA	300 mA	145 mA
In-line resistance (per line ±10%)		4.4 Ω			
Bandwidth (-3 dB 50 Ω system)		20 MHz	20 MHz	20 MHz	20 MHz
Transient specification		**OVR KT1**	**OVR KT1/PTC**	**OVR K10T1**	**OVR K10T1/PTC**
Let-through voltage (all conductors) [2] Up					
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21	– line to line	395 V	395 V	395 V	395 V
	– line to earth	395 V	395 V	395 V	395 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21	– line to line	390 V	390 V	390 V	390 V
	– line to earth	390 V	390 V	390 V	390 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21	– line to line	298 V	298 V	298 V	298 V
	– line to earth	298 V	298 V	298 V	298 V
5 kV, 10/700 µs [3]	– line to line	300 V	300 V	300 V	27 V
	– line to earth	300 V	300 V	300 V	80 V
Maximum surge current [4]					
D1 test 10/350 µs to BS EN/EN/IEC 61643-21	– line to line	1 kA			
	– line to earth	2 kA			
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002	– line to line	5 kA			
	– line to earth	10 kA			

Power Faults specification	**OVR KT1**	**OVR KT1/PTC**	**OVR K10T1**	**OVR K10T1/PTC**
Power/Line Cross and Power Induction - tests to: ITU-T (formerly CCITT) K.20, K.21 and K.45, Telcordia GR-1089-CORE, Issue 2:2002, UL 60950/IEC 950				
Power/line cross	–	110/230 Vac (15 min)	–	110/230 Vac (15 min)
Power induction	–	600 V, 1 A (0.2 sec)	–	600 V, 1 A

Mechanical specification		**OVR KT1, OVR KT1/PTC**	**OVR K10T1, OVR K10T1/PTC**	**OVR KE10**
Temperature range		-40 to +80 °C		–
Connection type		To LSA-PLUS disconnection modules (BT part number 237A)		–
Earth connection		Via OVR KE10 earth bar	Via integral earth clip/external M4 bush	–
Material		FR Polymer UL-94 V-0		Stainless Steel
Weight	– Unit	0.01 kg	0.10 kg	0.01 kg
	– Packaged	0.12 kg (per 10)	0.12 kg	0.10 kg (per 10)
Dimensions		See diagram below		

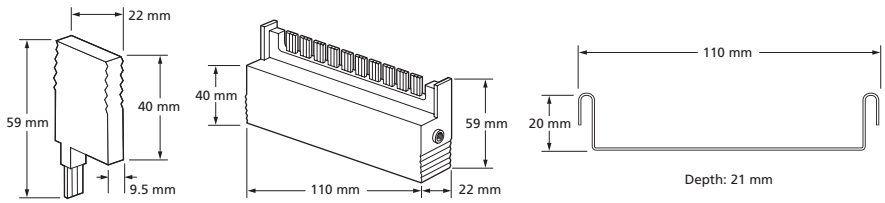

[1] Maximum working voltage (DC or AC peak) at 10 µA for OVR KT1, OVR KT1/PTC, OVR K10T1, OVR K10T1/PTC

[2] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns

[3] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45,Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

[4] The installation and connections external to the protector may limit the capability of the protector

Protection and safety

Telecoms & computer line protection
OVR TN/RJ11 & ISDN/RJ45 Series

LPZ 0→3	FULL MODE Bonding + Equipment Protection	SIGNAL/ TELECOM TEST CAT D + C + B	ENHANCED Low let-through voltage	LOW IN-LINE RESISTANCE 4.4 Ω	CURRENT RATING 300 mA

Combined Category D, C, B tested protector (to BS EN 61643) suitable to protect telephony equipment plugged into a Modem (RJ11) or ISDN (RJ45) socket. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Substantial earth connection to enable effective earthing
- Supplied in a sturdy ABS housing ready for flat mounting, or vertically via TS35 'Top Hat' DIN rail
- OVR TN/RJ11-2/6, OVR TN/RJ11-4/6 and OVR TN/RJ11-6/6 are suitable for telecommunication applications in accordance with Telcordia and ANSI Standards (see Application Note OVR AN005)

Application

- For PSTN (e.g. POTS, dial-up, lease line, T1/E1, *DSL and Broadband) use TN/RJ11
- OVR TN/RJ11... are suitable for use on telephone lines with a maximum (or ringing) voltage of up to 296 Volts
- For telephone lines with RJ11 connections protect the middle 2 (of 6) conductors with OVR TN/RJ11-2/6, the middle 4 (of 6) with OVR TN/RJ11-4/6 or all 6 with OVR TN/RJ11-6/6
- For S/T interface ISDN lines, use OVR ISDN/RJ45-4/8 and OVR ISDN/RJ45-8/8
- For S/T interface ISDN lines with RJ45 connections protect the middle 4 (of 8) conductors (paired 3&6, 4&5) with OVR ISDN/RJ45-4/8, or all 8 (outside pairs 1&2, 7&8) with OVR ISDN/RJ45-8/8

For further information on RJ45 ISDN applications, see separate Application Note OVR AN002 and for global telephony applications, see separate Application Note OVR AN005 (contact us for a copy).

Installation

Connect in series with the telephone or ISDN line. These units are usually installed close to the equipment being protected and within a short distance of a good electrical earth.

Accessories

OVR CAT5e/UTP-1
1 metre cable with RJ45 connections

Plug-in series connection for OVR TN/RJ11-2/6, 4/6 & 6/6

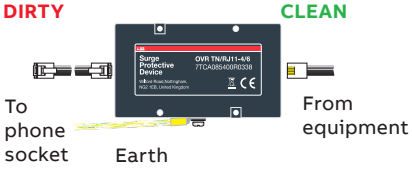

Plug-in series connection for OVR ISDN/RJ45-4/8 & 8/8

NOTE: For non-ISDN wire-in applications the high performance OVR TN, OVR SLTN or OVR TNQ can be used.
Protect PBX telephone exchanges and other equipment with LSA-PLUS connections using OVR KT series.

Protection and safety

Telecoms & computer line protection

OVR TN/RJ11 & ISDN/RJ45 Series

OVR TN/RJ11 & ISDN/RJ45 Series - Technical specification

Electrical specification		**OVR TN/ RJ11-2/6**	**OVR TN/ RJ11-4/6**	**OVR TN/ RJ11-6/6**	**OVR ISDN/ RJ45-4/8**	**OVR ISDN/ RJ45-8/8**
ABB order code		7TCA085400R0337	7TCA085400R0338	7TCA085400R0339	7TCA085460R0359	7TCA085460R0360
Nominal voltage		296 V	296 V	296 V	5 V	5 V/58 V [2]
Maximum working voltage Uc [1]		296 V	296 V	296 V	58 V	58 V
Current rating (signal)		300 mA				
In-line resistance (per line ±10%)		4.4 Ω				
Bandwidth (-3 dB 50 Ω system)		20 MHz	20 MHz	20 MHz	19 MHz	19 MHz
Transient specification		**OVR TN/ RJ11-2/6**	**OVR TN/ RJ11-4/6**	**OVR TN/ RJ11-6/6**	**OVR ISDN/ RJ45-4/8**	**OVR ISDN/ RJ45-8/8**
Let-through voltage (all conductors) [3] Up						
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21	– line to line	395 V	395 V	395 V	28 V	28 V/88 V [5]
	– line to earth	395 V	395 V	395 V	88 V	88 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21	– line to line	390 V	390 V	390 V	23 V	23 V/63 V [5]
	– line to earth	390 V	390 V	390 V	63 V	63 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21	– line to line	298 V	298 V	298 V	26 V	26 V/65 V [5]
	– line to earth	298 V	298 V	298 V	65 V	65 V
5 kV, 10/700 µs [4]	– line to line	300 V	300 V	300 V	27 V	27 V/80 V [5]
	– line to earth	300 V	300 V	300 V	80 V	80 V
Maximum surge current [6]						
D1 test 10/350 µs to BS EN/EN/IEC 61643-21		1 kA				
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002:		10 kA				
Mechanical specification		**OVR TN/ RJ11-2/6**	**OVR TN/ RJ11-4/6**	**OVR TN/ RJ11-6/6**	**OVR ISDN/ RJ45-4/8**	**OVR ISDN/ RJ45-8/8**
Temperature range		-40 to +80 °C				
Connection type		RJ11 plug and socket	RJ11 plug and socket	RJ11 plug and socket	RJ45 plug and socket	RJ45 plug and socket
Earth connection		M4/DIN rail				
Case Material		FR Polymer UL-94 V-0				
Weight	– Unit	0.15 kg				
	– Packaged	0.2 kg				
Dimensions		See diagram below				

OVR ISDN/RJ45-4/8, 8/8
cable length: 0.5 m



OVR TN/RJ11-2/6, 4/6, 6/6
cable length: 1 m



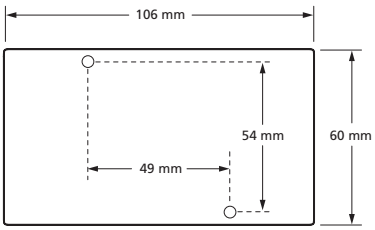

Depth: 24 mm
Fixing centres 49 x 54 mm, M3 clearance

[1] Maximum working voltage (DC or AC peak) measured at < 10 µA leakage for OVR TN/RJ11 products and < 5 µA for OVR ISDN/RJ45 products
[2] Maximum working voltage is 5 V for pairs 3/6 & 4/5, and 58 V for pairs 1/2 & 7/8
[3] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
[4] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45,Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)
[5] The first let-through voltage value is for pairs 3/4 & 5/6, and the second value is for pairs 1/2 & 7/8
[6] The installation and connectors external to the protector may limit the capability of the protector

Protection and safety

Data & signal protection

OVR TN, TNQ & SL TN Series

FULL MODE Bonding + Equipment Protection

OVR SLTN ULTRA SLIM 7 mm WIDTH

LPZ 0→3

ENHANCED Low let-through voltage

OVR TNQ ULTRA COMPACT 18 mm WIDTH

SIGNAL/ TELECOM TEST CAT D + C + B

LOW IN-LINE RESISTANCE

HIGH BANDWIDTH

Combined Category D, C, B tested protector (to BS EN 61643) specifically designed for telecommunications applications in accordance with Telcordia and ANSI standards (see Application Note OVR AN005). For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3. Available as standard OVR TN format, or compact OVR TNQ and Slim Line OVR SL TN versions for installations where a high number of lines require protection.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- 20 MHz bandwidth greatly exceeds VDSL2+ (50Mbps ~ 7MHz) maximum speeds
- Low in-line resistance minimizes reductions in signal strength
- Built-in DIN rail foot for simple mounting to top hat DIN rails
- Convenient earthing through DIN foot and/or earth terminal
- OVR TN can be flat mounted on base or side
- OVR TN and OVR TNQ have colour coded terminals for quick and easy installation check
- OVR SL TN has ultra slim 7 mm width ideal for compact protection of large numbers of lines (e.g. process control installations)
- OVR SL TN includes two stage removable protection module with simple quick release mechanism allowing partial removal for easy line commissioning and maintenance as well as full removal for protection replacement
- OVR SL TN includes optional LED status indication (add L suffix to part number - i.e. OVR SL TNL)

Application

Connect in series with the signal line either near where it enters or leaves the building or close to the equipment being protected ensuring it is very close to the system's earth star point. Install protectors either within an existing cabinet/cubicle or in a separate enclosure.

Accessories

Replacement module for OVR SL TN:
OVR SLTN/M
Standard module replacement

Combined Mounting/Earthing kits for OVR RS485:
OVR CME 4 For up to 4 x OVR TN
OVR CME 8 For up to 8 x OVR TN
OVR CME 16 For up to 16 x OVR TN
OVR CME 32 For up to 32 x OVR TN

If protectors cannot be incorporated within an existing panel or enclosure, OVR WBX enclosures are available for up to 4, 8, 16 or 32 protectors and their associated OVR CME kit.

Weatherproof enclosure:
OVR WBX SLQ (OVR SLTN and OVR TNQ)

OVR TN installed in series

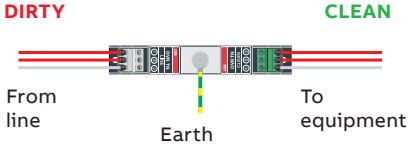

OVR SL TN installed in series

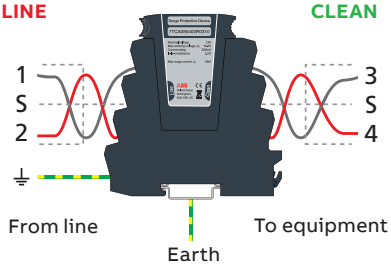

OVR TNQ installed in series (in-line)

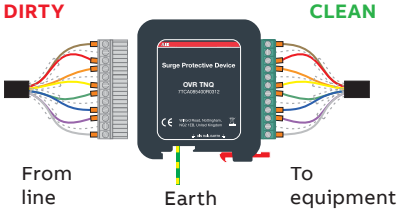

NOTE: The OVR KT Series is also available for telecommunications application using LSA-PLUS disconnection modules. Plug-in solutions are also available for RJ11 connections (see OVR TN RJ11 Series).

Protection and safety

Data & signal protection

OVR TN, TNQ & SL TN Series

OVR TN, TNQ & SL TN Series - Technical specification

Electrical specification		**OVR TN**	**OVR SL TN, OVR SL TNL**	**OVR TNQ**
ABB order code		7TCA085400R0345	7TCA085400R0323, 7TCA085400R0418	7TCA085400R0344
Nominal voltage [1]		–		
Maximum working voltage Uc (RMS/DC) [2]		–/296 V		
Current rating (signal)		300 mA		
In-line resistance (per line ±10%)		4.4 Ω		
Bandwidth (-3 dB 50 Ω system)		20 MHz		
Transient specification		**OVR TN**	**OVR SL TN , OVR SL TNL**	**OVR TNQ**
Let-through voltage (all conductors) [3] Up				
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21		395 V		
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21		390 V		
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21		298 V		
5 kV, 10/700 µs [4]		300 V		
Maximum surge current				
D1 test 10/350 µs to BS EN/EN/IEC 61643-21	– Per signal wire	2.5 kA	1.25 kA	2.5 kA
	– Per pair	5 kA	2.5 kA	5 kA
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002	– Per signal wire	10 kA		
	– Per pair	20 kA		
Mechanical specification		**OVR TN**	**OVR SL TN , OVR SL TNL**	**OVR TNQ**
Temperature range		-40 to +80 °C		
Connection type		Screw terminal - max. torque 0.5 Nm	Screw terminal - max. torque 0.8 N	Pluggable 12 way screw terminal
Conductor size (stranded)		2.5 mm²	4 mm²	2.5 mm²
Earth connection		M6 stud	Via DIN rail or 4 mm² earth terminal - max. torque 0.8 Nm	Via DIN rail or M5 threaded hole in base of unit
Case Material		FR Polymer UL-94 V-0		
Weight	– Unit	0.08 kg		0.1 kg
	– Packaged (per 10)	0.85 kg		1.3 kg
Dimensions		See diagram below		

OVR TN

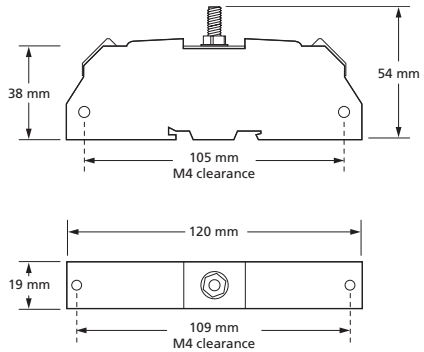

OVR TNQ



OVR SL TN

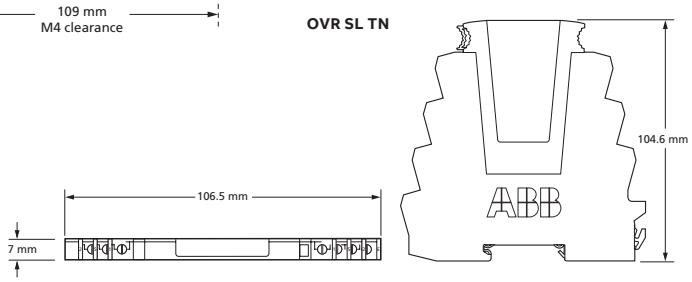

[1] Nominal voltage (RMS/DC or AC peak) measured at < 10 µA
[2] Maximum working voltage (RMS/DC or AC peak) measured at < 5 mA
[3] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
[4] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45,Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

Protection and safety

Telecom & computer line protection
OVR Cat-5 & Cat-6 Series

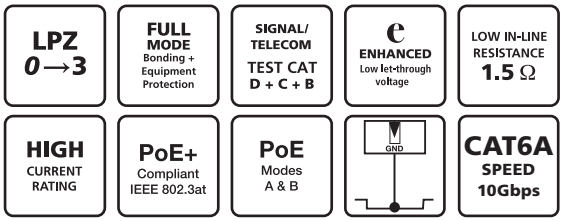

Combined Category D, C, B tested protector (to BS EN 61643) suitable to protect twisted pair Ethernet networks, including Power over Ethernet (PoE), with RJ45 connections. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Suitable for systems signalling on up to eight wires of either shielded or unshielded twisted pair cable
- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Unlike some competing devices, the ethernet SPDs provide effective protection without impairing the system's normal operation
- Low capacitance circuitry prevents the start-up signal
- degradation associated with other types of network protector
- Low in-line resistance minimizes unnecessary reductions in signal strength to maximize signalling distance
- Sturdy ABS housing with convenient holes for flat mounting, or vertically via TS35 'Top Hat' DIN rail
- Substantial earth connection to enable effective earthing
- Will protect all PoE powering modes A and B.

Application

Use these protectors on network cables that travel between buildings to prevent damage to equipment, e.g. computers, servers, repeaters and hubs. Suitable for computer networks up to Cat-6A cabling.

- To protect up to 100baseT networks with Cat-5/Cat-5e cabling use OVR Cat-5e
- To protect up to 1000baseT/10GbaseT networks with Cat-6/Cat-6A cabling use OVR Cat-6
- To protect up to 100baseT Power over Ethernet (PoE) networks with Cat-5/Cat-5e use OVR Cat-5e/PoE
- To protect up to 1000baseT/10GbaseT Power over Ethernet (PoE) networks with Cat-6/Cat-6A cabling use OVR Cat-6/PoE

For further application information, see separate Application Note OVR AN004 (contact us for a copy).

Installation

Connect in series with the network cable, either:

- Near to where it enters or leaves the building, or
- As it enters the network hub, or
- Close to the equipment being protected

This should be close to the system's earth star point (to enable a good connection to earth).

Plug-in series connection

Accessories

OVR CAT5e/UTP-1
1 metre cable with unshielded RJ45 connections

OVR CAT6/STP-2
2 metre screened cable with shielded RJ45 connections

TECHNICAL NOTE: The interfaces used in Ethernet networks incorporate an isolation transformer which gives these systems an in-built immunity to transients between line and earth of 1,500 Volts or more.

NOTE: To protect datacomms systems based on twisted pairs, use the OVR D, E or H Series. Local protection for networked equipment is also available.

Protection and safety

Telecom & computer line protection

OVR Cat-5 & Cat-6 Series

OVR Cat-5 & Cat-6 Series - Technical specification

Electrical Specification		**OVR Cat-5e**	**OVR Cat-5e/PoE**	**OVR Cat-6**	**OVR Cat-6/PoE**
ABB order code		7TCA085400R0289	7TCA085400R0290	7TCA085400R0291	7TCA085400R0292
Maximum working voltage Uc [1]	– data [2]	5 V			
	– power [3]	–	58 V	–	58 V
Current rating		300 mA	600 mA [4]	300 mA	600 mA [4]
In-line resistance (per line ±25%)	– data [2]	1.5 Ω			
	– power	–	1.5 Ω	–	–
Maximum data rate		100 Mbps	100 Mbps	1000 Mbps	1000 Mbps
Networking standards		10/100baseT	10/100baseT	10/100/1000/ 10GbaseT	10/100/1000/ 10GbaseT
		TIA Cat-5e	TIA Cat-5/PoE	TIA Cat-6	TIA Cat-6
		IEEE 802.3i	IEEE 802.3i	IEEE 802.3i	IEEE 802.3i
		IEEE 802.3u	IEEE 802.3u	IEEE 802.3u	IEEE 802.3u
		–	IEEE 802.3af	IEEE 802.3ab	IEEE 802.3ab
		–	IEEE 802.3at	IEEE 802.3an	IEEE 802.3an
		–	–	–	IEEE 802.3af
		–	–	–	IEEE 802.3at
Transient specification		**OVR Cat-5e**	**OVR Cat-5e/PoE**	**OVR Cat-6**	**OVR Cat-6/PoE**
Let-through voltage (all conductors) [5] Up					
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21	– line to line	120 V	120 V/116 V [8]	120 V	120 V/116 V [8]
	– line to earth [6]	700 V		900 V	900 V
C3 test 1kV/µs, 100A 10/1000 µs to BS EN/EN/IEC 61643-21	– line to line	-	-	15 V	15 V
	– pair to pair (PoE)	-	-	-	90 V
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21	– line to line	74 V	74 V/95 V [8]	74 V	74 V/95 V [8]
	– line to earth [6]	600 V			
B2 test 1kV 10/700µs, 25A 5/320µs to BS EN/EN/IEC 61643-21	– line to line	-	-	9 V	9 V
	– pair to pair (PoE)	-	-	-	85 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21	– line to line	21 V	21 V/87 V [8]	21 V	21 V/87 V [8]
	– line to earth [6]	550 V		700 V	700 V
5 kV, 10/700 µs [7]	– line to line	25 V	25 V/90 V [8]	25 V	25 V/90 V [8]
	– line to earth [6]	600 V			
Maximum surge current [9]					
D1 test 10/350 µs to BS EN/EN/IEC 61643-21	– line to line	1 kA	-	-	-
	– line to earth [6]	-	-	1 kA	1 kA
8/20 µs to ITU-T K.45:2018, IEEE C62.41.2:2002	– line to line	-	-	150 A	150 A
	– line to earth [6]	10 kA		10 kA	10 kA
Mechanical specification		**OVR Cat-5e, OVR Cat-5e/PoE**		**OVR Cat-6, OVR Cat-6/PoE**	
Temperature range		-40 to +80 °C		-40 to +80 °C	
Connection type		RJ45 sockets		RJ45 sockets	
Cable (supplied)		0.5 m Cat-5e UTP patch lead		0.5 m Cat-6 shielded patch lead[8]	
Earth connection		M4/DIN rail		M4/DIN rail	
Case Material		FR Polymer UL-94 V-0		FR Polymer UL-94 V-0	
Weight	– Unit	0.15 kg		0.15 kg	
	– Packaged	0.2 kg			
Dimensions		See diagram below		See diagram below	

[1] Maximum working voltage (DC or AC peak) measured at 1 mA leakage
[2] Data pairs 1/2 and 3/6 are protected as standard. Pairs 4/5 and 7/8 are also protected on Cat-6 barriers
[3] PoE protectors transmit power Mode A and Mode B power
[4] Based on 30W of transmitted PSE power, to IEEE 802.3at.
[5] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth. Response time <10 ns (on all protected pairs)
[6] The interfaces used in network systems incorporate an isolation transformer that inherently provides an inbuilt immunity to transients between line and earth of 1,500 Volts or more
[7] Test to IEC 61000-4-5:2014, ITU-T (formerly CCITT) K.20, K.21 and K.45,Telcordia GR-1089-CORE, Issue 6:2011, ANSI TIA/EIA/ IS-968-A:2005 (formerly FCC Part 68).
[8] The first number is for the data pair, with the second number for the power pair
[9] The installation and connectors may limit the capability of the protector

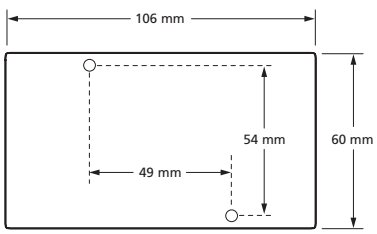

Depth: 24 mm

Fixing centres 49 x 54 mm, M3 clearance

Protection and safety

Data & signal protection

OVR RS485, RS485Q & SL RS485 Series

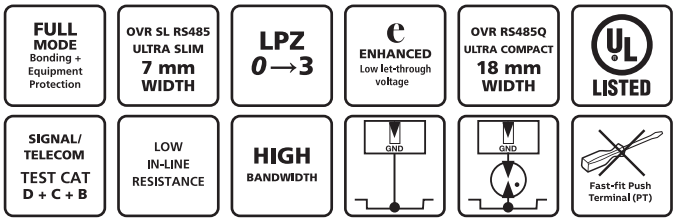

Combined Category D, C, B tested (to IEC/EN 61643) Surge Protection Device (SPD) specifically designed for RS 485 and Fieldbus applications, such as Profibus DP. For use at boundaries up to LPZ 0 protect against flashover (typically the service entrance location) through to LPZ 3. Available as standard OVR RS485 format, or compact OVR RS485Q and Slim Line OVR SL RS485 versions for installations where a high number of lines require protection.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/ BS EN 62305) between all lines - Full Mode protection • Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- 45 MHz bandwidth greatly exceeds 12 Mbps maximum speeds
- Low in-line resistance minimizes reductions in signal strength
- Suitable for earthed or isolated screen systems
- Built-in DIN rail foot for simple mounting to top hat DIN rails
- Convenient earthing through DIN foot and/or earth terminal
- Connect screen connection ‘S’ as the 0V ground on RS485 systems
- OVR RS485 can be flat mounted on base or side
- OVR RS485 and OVR RS485Q have colour coded terminals for quick and easy installation check
- OVR SL RS485 has ultra slim 7 mm width ideal for compact protection of large numbers of lines (e.g. process control installations)
- OVR SL RS485 includes two stage removable protection module with simple quick release mechanism allowing partial removal for easy line commissioning and maintenance as well as full removal for protection replacement
- OVR SL RS485 includes optional LED status indication. Add L suffix to part number - i.e. OVR SL RS485L
- OVR RS485Q and OVR RS485Q/PT have UL497B approval under file E240341

Application

Connect in series with the signal line either near where it enters or leaves the building or close to the equipment being protected ensuring it is very close to the system’s earth star point. Install SPDs either within an existing cabinet/cubicle or in a separate enclosure.

Accessories

Replacement module for OVR SL RS485:
OVR SLRS485/M
Standard module replacement
OVR SLRS485/B
Base replacement

Combined Mounting/Earthing kits for OVR RS485:
OVR CME 4 For up to 4 x OVR RS485
OVR CME 8 For up to 8 x OVR RS485
OVR CME 16 For up to 16 x OVR RS485
OVR CME 32 For up to 32 x OVR RS485

If protectors cannot be incorporated within an existing panel or enclosure, OVR WBX enclosures are available for up to 4, 8, 16 or 32 protectors and their associated OVR CME kit.

Weatherproof enclosure:
OVR WBX SLQ (OVR SL RS485 and OVR RS485Q)

OVR RS485 installed in series

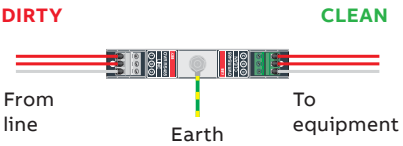

OVR SL RS485 installed in series

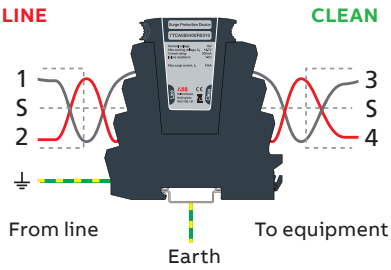

OVR RS485Q installed in series (in-line)

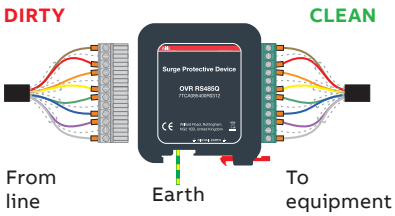

NOTE: The OVR SL ‘Slim Line’ Series is also available for protection of 3-wire and RTD applications (OVR SL/3W & OVR SL RTD).
The OVR SL X Series has approvals for use in hazardous areas.

Protection and safety

Data & signal protection

OVR RS485, RS485Q & SL RS485 Series

OVR Q Series - Technical specification

Electrical specification		OVR RS485 Series	OVR SL RS485 Series	OVR RS485Q Series
Nominal voltage[1]		15 V		
Maximum working voltage *Uc* (RMS/DC)[2]		11 V / 16.7 V		
Current rating (signal)		300 mA		
In-line resistance (per line ±10%)		1 Ω		
Bandwidth (-3 dB 50 Ω system)		45 MHz		
Transient specification				
Let-through voltage (all conductors)[3] *Up*				
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21		55.0 V		
C1 test 1 kV, 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21		42.0 V		
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21		27.2 V		
5 kV, 10/700 µs[4]		28.2 V		
Maximum surge current				
D1 test 10/350 µs to BS EN/EN/IEC 61643-21:	– Per signal wire 2.5 kA – Per pair	2.5 kA 5 kA	1.25 kA 2.5 kA	2.5 kA 5 kA
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002:	– Per signal wire – Per pair	10 kA 20 kA		
Mechanical specification				
Temperature range		-40 to +80 ºC		
Connection type		Screw terminal - max. torque 0.5 Nm	Screw terminal - max. torque 0.8 N	Pluggable 12 way screw terminal /PT version: Pluggable 12 way screwless Push Terminal
Conductor size (stranded)		2.5 mm²	4 mm²	2.5 mm²
Earth connection		M6 stud	Via DIN rail or 4 mm² earth terminal - max. torque 0.8 Nm	Via DIN rail or M5 threaded hole in base of unit
Case Material		FR Polymer UL-94 V-0		
Weight: – Unit		0.08 kg	0.08 kg	0.1 kg
Dimensions		See diagrams below		

[1] Nominal voltage (RMS/DC or AC peak) measured at < 10 µA
[2] Maximum working voltage (RMS/DC or AC peak) measured at < 5 mA
[3] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth, both polarities. Response time < 10 ns
[4] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45,Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

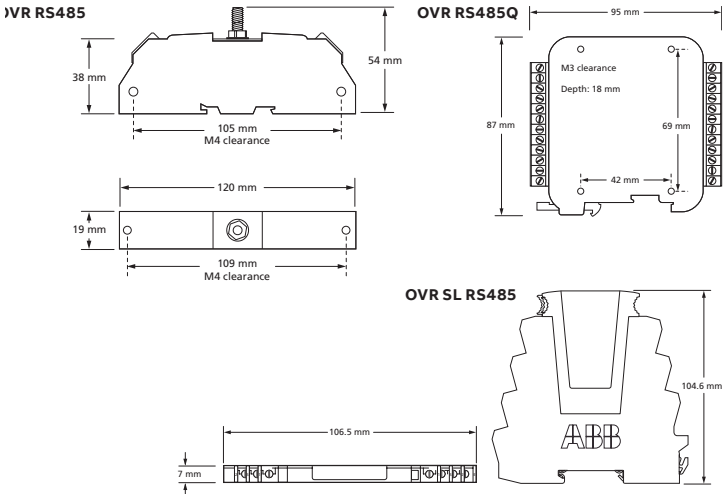

ABB order codes

Part	ABB order code	Part	ABB order code	Part	ABB order code
OVR RS485	7TCA085400R0311	**OVR RS485Q(UL)**	7TCA085400R0572	**OVR CME8**	7TCA085400R0415
OVR SLRS485/B	7TCA085400R0316	**OVR RS485Q/PT(UL)**	7TCA085400R0579	**OVR CME32**	7TCA085410R0046
OVR SLRS485	7TCA085400R0310	**OVR SLRS485/M**	7TCA085400R0317	**OVR WBXSLQ**	7TCA085400R0326
OVR SLRS485L	7TCA085400R0417	**OVR SLRS485L/M**	7TCA085400R0470	**OVR WBXSLQ/G**	7TCA085400R0327
OVR SLRS485(UL)	7TCA085400R0551	**OVR SLRS485L/M(UL)**	7TCA085400R0600	**WBX 4**	7TCA085410R0027
OVR SLRS485L(UL)	7TCA085400R0552	**OVR CME4**	7TCA085400R0414	**WBX 8**	7TCA085410R0030
OVR RS485Q	7TCA085400R0312	**OVR CME16**	7TCA085410R0045	**WBX 16/2/G**	7TCA085410R0020

Protection and safety
Specific systems protection
OVR RF Series

FULL MODE Bonding + Equipment Protection | LPZ 0→3 | ENHANCED Low let-through voltage | SIGNAL/ TELECOM TEST CAT D + C + B | HIGH BANDWIDTH

Combined Category D, C, B tested protector (to BS EN 61643) suitable for RF systems using coaxial cables at frequencies between DC and 2.7 GHz and where DC power is present. Suitable for RF systems with power up to 1.9 kW. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- Wide bandwidth means a single product is suitable for a range of applications
- Very low attenuation and near unity VSWR over a wide range of frequencies ensure the protectors do not impair system performance
- Available with N, 7/16 DIN and BNC connectors
- Easily mounted and earthed via fixtures on the base of the unit that accept M3 and M5 screws or via mounting brackets
- Additional mounting plates give increased flexibility
- Robust aluminium housing

Application

Use on coaxial cables to protect RF transmitter and receiver systems, including electronics located at the antenna or dish. Typical examples include cell sites, military communications, satellite earth stations, pager systems and emergency services communications systems.

Installation

In a building, connect in series with the coaxial cable near where it enters or leaves the structure, or close to the equipment being protected. This should be as close as possible to the system's earth star point (to enable a good connection to earth). On a mast, connect in series with the coaxial cable near the antenna/dish being protected. Install in a radio communications room, an existing cabinet or a suitable enclosure.

OVR RF 111421 with N female connectors installed in series

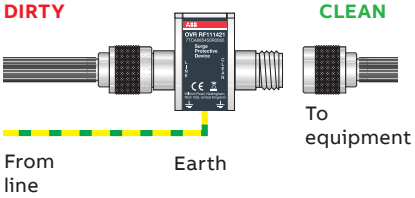

Accessories

OVR RF BK1 Straight mounting plates
OVR RF BK2 90° angled mounting plates
OVR RF BK3 Bulkhead through mounting plate (single)
OVR RF BK4 Bulkhead through mounting plate (for 4 products)
OVR RF GDT-4 Replacement gas discharge tube

NOTE: These protectors are based on a continuous transmission line with a GDT connected between this line and screen/earth, and are suited for applications where DC is required to pass to the equipment. OVR CCTV/B and OVR CCTV/T are suitable for use on coaxial (or twisted pair) CCTV lines.
For coaxial CATV lines, use the OVR CATV/F.

Protection and safety
Specific systems protection
OVR RF Series

OVR RF Series - Technical specification

Electrical specification		**OVR RF 111421**	**OVR RF AA1421**	**OVR RF 441421**
Gas Discharge Tube voltage		350 V		
Maximum working voltage Uc (RMS)		200 V		
Characteristic impedance		50 Ω		
Capacitance (@ 1 MHz)		< 5 pF		
Bandwidth		DC-2.7 GHz		
Voltage standing wave ratio		≤ 1.1		
Insertion loss over bandwidth		≤ 0.1 dB		
Maximum power [1]		650 W		
Transient specification		**OVR RF 111421**	**OVR RF AA1421**	**OVR RF 441421**
Let-through voltage (all conductors) [2] Up				
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21		< 800 V		
C1 test 1 kV 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21		< 650 V		
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21		< 550 V		
5 kV, 10/700 µs [3]		< 580 V		
Maximum surge current [4]				
D1 test 10/350 µs to BS EN/EN/IEC 61643-21		2.5 kA		
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002		20 kA		
Mechanical specification		**OVR RF 111421**	**OVR RF AA1421**	**OVR RF 441421**
ABB order code		7TCA085450R0065	7TCA085450R0063	7TCA085450R0066
Temperature range		-40 to +80 °C		
Connection type		N female	7/16 DIN female	BNC female
Conductor size (stranded)		Via mounting fixtures		
Case Material		Aluminium body, nickel plated. Brass connectors, white bronze plated		
Weight	– Unit	120 g	190 g	90 g
	– Packaged	140 g	210 g	110 g
Dimensions		See diagram below		

OVR RF BK1 (ABB order code: 7TCA085400R0416)
Straight mounting bracket, 53 x 26.3 x 3 mm
2 x M4 clearance mounting holes, 16.3 mm apart

OVR RF BK2 (ABB order code: 7TCA085400R0064)
90° mounting bracket, 33 x 26.3 x 3 mm, 20 x 26.3 x 3 mm
2 x M4 clearance mounting holes, 16.3 mm apart, 14 mm from fold line

OVR RF BK3 (ABB order code: 7TCA085400R0412)
90° mounting bracket, 50 x 24 x 1.5 mm, 60 x 24 x 1.5 mm
2 x M5 clearance mounting holes, 40 mm apart

OVR RF BK4 (ABB order code: 7TCA085400R0413)
90° quad mounting bracket, 50 x 24 x 1.5 mm, 210 x 24 x 1.5 mm
5 x M5 clearance mounting holes, various spacings
Mounting brackets supplied with screws for fixing to protector

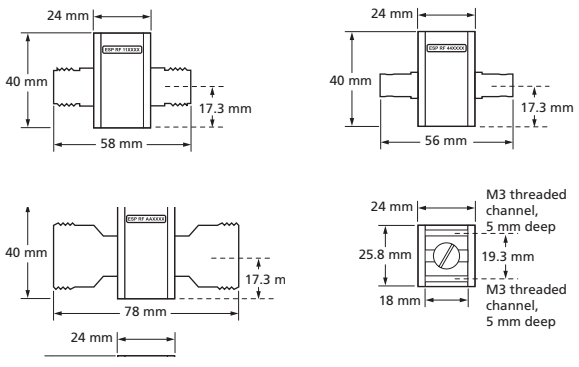

[1] Power levels have been de-rated to allow for real life 'worst case' conditions, calculated with VSWR as 2:1
[2] The maximum transient voltage let-through of the protector throughout the test (±10%) (±10%). Response time < 10 ns. This let-through voltage represents a deviation from the applied signal voltage, present at the time of the test
[3] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45, Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)
[4] The installation and connections external to the protector may limit the capability of the protector

Protection and safety

Specific systems protection

OVR CCTV Series

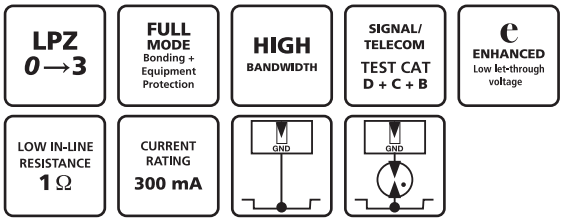

Combined Category D, C, B tested protector (to BS EN 61643) suitable for coaxial CCTV cables with BNC connectors (OVR CCTV/B) or twisted pair CCTV lines (OVR CCTV/T) on systems with either an earthed or an isolated screen. Not suitable for use on broadcast, satellite or cable TV systems. For use at boundaries up to LPZ 0 to protect against flashover (typically the service entrance location) through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Full Mode design capable of handling partial lightning currents as well as allowing continual operation of protected equipment
- Repeated protection in lightning intense environments
- 100 MHz bandwidth prevents the degradation of high frequency signals
- Low in-line resistance to minimize unnecessary reductions in signal strength and maximizes signalling distance
- Very low reflection coefficient/VSWR ensure that the protector doesn't disrupt system operations
- Suitable for either earthed or isolated screen systems
- Sturdy, conductive ABS housing for 2 way shielding - preventing emissions & providing signals with immunity from external interference
- Convenient holes for flat mounting on base or side
- Built-in DIN rail foot for easy installation on a top hat DIN rail
- OVR CCTV/T has colour coded terminals for a quick and easy installation check - grey for the dirty (line) end and green for the clean end
- Substantial earth stud to enable effective earthing
- Integral earthing plate for enhanced connection to earth via OVR CME kit

Application

Use these protectors on the video cable to outdoor CCTV cameras and central control and monitoring equipment.

Installation

Connect in series with the CCTV cable in a convenient place close to the equipment being protected. For outdoor CCTV cameras, protectors should be mounted in the junction box, or in a separate enclosure, close to the camera. Protect central control and monitoring equipment inside the building by installing protectors on all incoming or outgoing lines, either:

a) near where they enter or leave the building, or

b) close to the equipment being protected (or actually within its control panel).

Accessories

When CCTV protectors are installed in groups, or alongside protectors for signal and mains power lines, these can be mounted and earthed simultaneously on a OVR CME kit. An OVR CME 4 will accommodate the video, telemetry and power protectors to a camera. If protectors cannot be incorporated within an existing panel or enclosure, OVR WBX enclosures are available for up to 4, 8, 16 or 32 protectors and their associated OVR CME kit. The OVR WBX 4/GS is a secure IP66 enclosure suitable for a OVR CME 4 and associated protectors.

Series connection for OVR CCTV/B

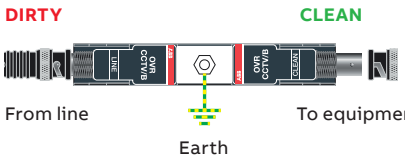

Series connection for OVR CCTV/T

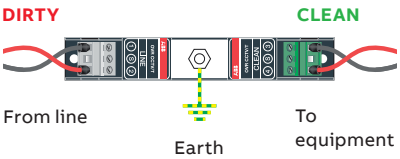

NOTE: Camera telemetry or control lines should be protected with a suitable Lightning Barrier from the OVR D or E Series. Protectors for the power supply to individual cameras (e.g. OVR 240-16A) and the mains supply to the control room are available. For coaxial RF (OVR RF Series) cable protectors and CATV systems (OVR CATV/F) are also available.

Protection and safety

Specific systems protection

OVR CCTV Series

OVR CCTV Series - Technical specification

Electrical specification		**OVR CCTV/B**	**OVR CCTV/B-15V**	**OVR CCTV/B-30V**	**OVR CCTV/B-50V**	**OVR CCTV/T**	**OVR CCTV/T-15V**	**OVR CCTV/T-30V**	**OVR CCTV/T-50V**
ABB order code		7TCA085400R0296	7TCA085400R0297	7TCA085400R0299	7TCA085400R0300	7TCA085400R0301	7TCA085400R0302	7TCA085400R0298	7TCA085400R0303
Nominal voltage [1] (peak-peak)		1 V				2 V			
Maximum working voltage Uc [2] (peak)		7.79 V	16.7 V	36.7 V	56.7 V	7.79 V	16.7 V	36.7 V	56.7 V
Current rating (signal)		300 mA							
In-line resistance (±10%)		1 Ω inserted in coax inner			1 Ω per line				
Bandwidth (-3 dB 75 Ω system) [3]		> 100 MHz							
Voltage standing wave ratio		< 1.2:1							
Transient specification		**OVR CCTV/B**	**OVR CCTV/B-15V**	**OVR CCTV/B-30V**	**OVR CCTV/B-50V**	**OVR CCTV/T**	**OVR CCTV/T-15V**	**OVR CCTV/T-30V**	**OVR CCTV/T-50V**
Let-through voltage (all conductors)(4) Up									
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21		39.5 V	55.0 V	78.0 V	105.0 V	39.5 V	55.0 V	78.0 V	105.0 V
C1 test 1 kV 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21		26.0 V	42.0 V	66.5 V	93.5 V	26.0 V	42.0 V	66.5 V	93.5 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21		16.0 V	27.2 V	47.5 V	73.6 V	16.0 V	27.2 V	47.5 V	73.6 V
5 kV, 10/700 µs [5]		17.0 V	28.2 V	49.5 V	76.2 V	17.0 V	28.2 V	49.5 V	76.2 V
Maximum surge current [6]									
D1 test 10/350 µs to BS EN/EN/IEC 61643-21	– Per signal wire	2.5 kA				2.5 kA			
	– Per pair	–				5 kA			
8/20 µs to ITU (formerly CCITT)	– Per signal wire	10 kA				10 kA			
	– Per pair	–				20 kA			
Mechanical specification		**OVR CCTV/B variants**				**OVR CCTV/T variants**			
Temperature range		-40 to +80 °C							
Connection type		Coaxial BNC female				Screw terminal			
Conductor size (stranded)		Not applicable				2.5 mm^2			
Earth connection		M6 stud							
Case Material		ABS UL94 V-0				ABS UL94 V-0			
Weight	– Unit	0.08 kg							
	– Packaged	0.9 kg							
Dimensions		See diagram below							

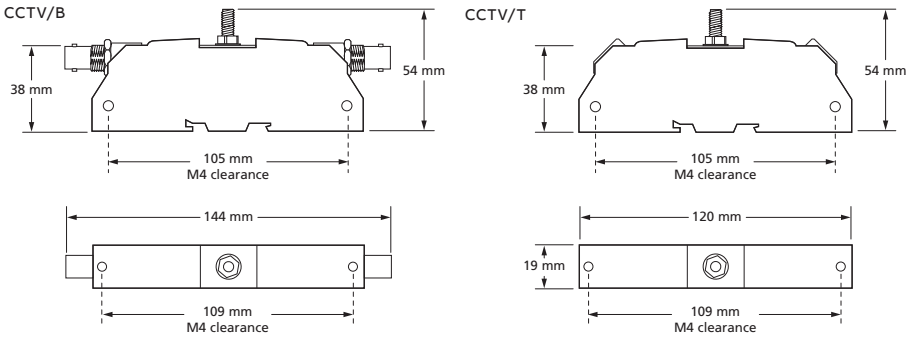

[1] Nominal voltage (DC or AC peak) measured at < 10 µA leakage
[2] Maximum working voltage (DC or AC peak) measured at 5 mA leakage
[3] Capacitance < 30 pF
[4] The maximum transient voltage let-through of the protector throughout the test (±10%), line to line & line to earth. Screen to earth let-through voltage will be up to 600 V (with 5 kV 10/700 test), when protector is configured for use with non-earthed or isolated screen systems. Response time < 10 ns
[5] Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45,Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)
[6] The installation and connectors external to the protector may limit the capability of the protector

Protection and safety

Mains power protection

OVR 240-16A

FULL MODE Bonding + Equipment Protection

MAINS TEST TYPE 2 + 3

ENHANCED Low let-through voltage

LPZ 1→3

Combined Type 2 and 3 tested protector (to BS EN 61643) for use on low current (up to 16 A) single phase systems to protect connected electronic equipment from transient overvoltages on the mains supply, e.g. CCTV systems, fire/intruder alarm panels.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all sets of conductors (phase to neutral, phase to earth, neutral to earth - Full Mode protection) allowing continuous operation of equipment
- Repeated protection in lightning intense environments
- Compact size for easy incorporation in the protected system
- Removable DIN rail foot for simple clip-on mounting to top hat DIN rails
- Colour coded terminals give a quick and easy installation check - grey for the dirty (line) end and green for the clean end
- Robust housing and substantial earth stud fixing holes ready for flat mounting
- Maintenance free

Application

Use these protectors on low current mains power supplies, e.g. CCTV cameras, alarm panels and telemetry equipment.

Installation

Connect in-line with the power supply usually either within the equipment panel (or for CCTV cameras, in an enclosure close by), or on the fused connection that supplies equipment. To protect equipment inside a building from transients entering on an outgoing feed (e.g. to CCTV cameras or to site lighting) the protector should be installed as close to where the cable leaves the building as possible. Protectors should be installed either within an existing cabinet/cubicle or in a separate enclosure.

Accessories

If several OVR 240-16A protectors are to be installed together, or if one is in use alongside OVR SPDs for video or signal lines, these can be simultaneously mounted and earthed on a OVR CME kit and housed in a suitable OVR WBX enclosure.

Connect in-line on supplies fused up to 16 A. Note how the protector can also be earthed from its earth stud.

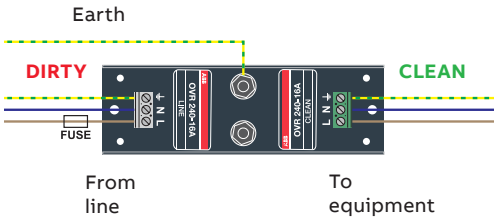

Protection and safety

Mains power protection

OVR 240-16A

OVR 240-16A - Technical specification

Electrical specification		**OVR 240-16A**
ABB order code		7TCA085460R0361
Nominal voltage - Phase-Neutral Uo (RMS)		240 V
Maximum voltage - Phase-Neutral Uc (RMS)		280 V
Working voltage (RMS)		200-280 V
Frequency range		47-63 Hz
Current rating (supply)		16 A or less
Max. back-up fuse (see installation instructions)		≤ 16 A
Leakage current (to earth)		< 0.5 mA
Transient specification		**OVR 240-16A**
Type 2 (BS EN/EN), Class II (IEC)		
Nominal discharge current 8/20 µs (per mode) In		5 kA
Let-through voltage Up at In [1]		750 V
Maximum discharge current Imax (per mode) [2]		10 kA
Type 3 (BS EN/EN), Class III (IEC)		
Let-through voltage at Uoc of 6 kV 1.2/50 µs and Isc of 3 kA 8/20 µs (per mode) [1, 3]		600 V
Electrical specification		OVR 240-16A
Temperature range		-40 to +80 °C
Connection type		Screw terminal - maximum torque 0.5 Nm
Conductor size (stranded)		4 mm²
Earth connection		Via M6 stud or earth terminal -maximum torque 0.5 Nm
Degree of protection (IEC 60529)		IP20
Case material		Steel
Weight	– Unit	0.23 kg
	– Packaged	0.25 kg
Dimensions		See diagrams below

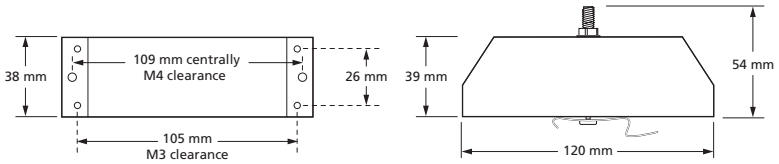

[1] The maximum transient voltage let-through of the protector throughout the test (±10%), phase to neutral, phase to earth and neutral to earth

[2] The electrical system, external to the unit, may constrain the actual current rating achieved in a particular installation

[3] Combination wave test within IEC/BS EN 61643, IEEE C62.41-2002 Location Cats C1 & B3, SS 555:2010, AS/NZS 1768-2007, UL 1449 mains wire-in

Protection and safety

Specific systems protection

OVR TV Series

LPZ 0→3 | FULL MODE Bonding + Equipment Protection | SIGNAL/ TELECOM TEST CAT D + C + B | ENHANCED Low let-through voltage | HIGH BANDWIDTH

Combined Category D, C, B tested protector (to BS EN 61643) suitable to protect Cable, Terrestrial and Satellite TV systems. For use on lines running within buildings at boundaries up to LPZ 0 to through to LPZ 3 to protect sensitive electronic equipment.

Features & benefits

- Very low let-through voltage (enhanced protection to IEC/BS EN 62305) between all lines - Full Mode protection
- Low attenuation and high return loss over a wide range of frequencies ensures the protectors do not impair system performance
- Substantial earth termination
- Supplied ready for flat mounting
- Strong metal housing

Application

Use to protect analogue and digital Cable, Terrestrial and Satellite TV installations. OVR CATV/F, OVR MATV/F, OVR SMATV/F and OVR TV/F are suitable for systems using F connectors. OVR TV/EURO is suitable for systems using EURO-TV connectors.

- For protecting terrestrial antenna feeds use OVR TV/F or OVR TV/EURO
- For protecting satellite feeds use OVR SMATV/F
- For protecting distributed combined TV feeds use OVR MATV/F
- For protecting cable TV feeds use OVR CATV/F

For further information on TV applications, see separate Application Note OVR AN006 (contact us for a copy).

Installation

Connect in series with the coaxial cable either near where it enters or leaves each building or close to equipment being protected.

NOTE: Protectors for coaxial (or twisted pair) CCTV Lines are available. For coaxial RF lines, use the OVR RF Series. Transients can also be conduced into TV systems via the mains power supplies - use suitable OVR mains protection.

Protection and safety

Specific systems protection

OVR TV Series

OVR TV Series - Technical specification

Electrical specification		**OVR CATV/F**	**OVR MATV/F**	**OVR SMATV/F**	**OVR TV/F**	**OVR TV/EURO**
ABB order code		7TCA085400R0293	7TCA085400R0308	7TCA085400R0336	7TCA085400R0335	7TCA085400R0334
Maximum working voltage(1)		140 V	18.9 V	18.9 V	6.4 V	6.4
Maximum operating current		4 A	800 mA	800 mA	300 mA	300 mA
Characteristic impedance		75 Ω				
Bandwidth		5-860 MHz	5-3224 MHz	860-3224 MHz	5-860 MHz	5-860 MHz
Insertion loss	– 5-860 MHz	< 0.5 dB	< 0.3 dB	–	< 0.3 dB	< 0.3 dB
	– 860-2150 MHz	–	< 1.5 dB	< 1.5 dB	–	–
	– 2150-3224 MHz	–	< 2.2 dB	< 2.2 dB	–	–
Return loss (VSWR)	– 5-860 MHz	> 20 dB (< 1.2:1)	> 32 dB (< 1.05:1)	–	> 32 dB (< 1.05:1)	> 32 dB (< 1.05:1)
	– 860-2150 MHz	–	> 20 dB (< 1.2:1)	> 20 dB (< 1.2:1)	–	–
	– 2150-3224 MHz	–	< 2.2 dB	< 2.2 dB	–	–
Transient specification		**OVR CATV/F**	**OVR MATV/F**	**OVR SMATV/F**	**OVR TV/F**	**OVR TV/EURO**
Let-through voltage (all conductors)(2) Up						
C2 test 4 kV 1.2/50 µs, 2 kA 8/20 µs to BS EN/EN/IEC 61643-21		270 V	70 V	70 V	65 V	65 V
C1 test 1 kV 1.2/50 µs, 0.5 kA 8/20 µs to BS EN/EN/IEC 61643-21		265 V	60 V	60 V	50 V	50 V
B2 test 4 kV 10/700 µs to BS EN/EN/IEC 61643-21		245 V	45 V	45 V	30 V	30 V
5 kV, 10/700 µs(3)		250 V	50 V	50 V	35 V	35 V
Maximum surge current						
8/20 µs to ITU-T K.45:2003, IEEE C62.41.2:2002		3 kA				
D1 test 10/350 µs to BS EN/EN/IEC 61643-21		500 A	750 A	750 A	750 A	750 A
Mechanical specification		**OVR CATV/F**	**OVR MATV/F**	**OVR SMATV/F**	**OVR TV/F**	**OVR TV/EURO**
Temperature range		-40 to +80 ºC				
Connection type		F female				Euro-TV
Earth connection		~ 9.5 mm (3/8”) diameter earth stud				
Case Material		Diecast				
Weight	– Unit	0.14 kg				
	– Packaged	0.15 kg				
Dimensions		See diagram below				

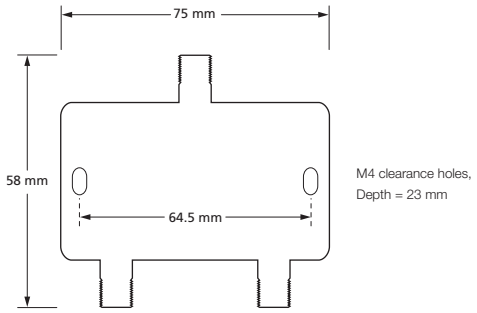

(1) Maximum working voltage (DC or AC peak) measured at < 5 µA (OVR CATV/F) and < 50 mA (OVR MATV/F, OVR SMATV/F, OVR TV/EURO, OVR TV/F)

(2) The maximum transient voltage let-through of the protector throughout the test (±10%) line to earth. Response time < 10 ns

(3) Test to IEC 61000-4-5:2006, ITU-T (formerly CCITT) K.20, K.21 and K.45,Telcordia GR-1089-CORE, Issue 2:2002, ANSI TIA/EIA/IS-968-A:2002 (formerly FCC Part 68)

Protection and safety

Protector accessories

OVR WBX Series

OVR WBX Series

OVR WBX Series

A range of moisture and dirt resistant enclosures for the convenient installation of any OVR protector. For signalling applications they can be used with their associated OVR CME with grey base and either a see-through or grey (part number/G or/GS) lid.

Features & benefits

- Tough polycarbonate enclosures
- Weatherproof with IP resistance to dirt and water of IP56 or more
- Clear lid enables easy visual inspection of the protector's visual status indication (OVR WBX 4, OVR WBX 8)
- Grey lid for applications not needing regular protector inspection (OVR WBX 4/GS, OVR WBX 8/GS and OVR WBX 16/2/G)
- For external CCTV and other installations requiring added security the OVR WBX 4/GS and OVR WBX 8/GS are supplied with an opaque lid and special secure head screws (plus tool)
- Supplied complete with metal base (mounting) plate with pre-prepared mounting positions and fixing hardware for easy installation

Application

Use OVR WBX enclosures when your OVR protector(s) can't be installed within the existing equipment panel or enclosure and for added protection in damp and dirty environments.

Installation

The protector(s), or OVR CME kit, are mounted on the metal base plate, which in turn mounts in the enclosure.

OVR WBX Series - Technical specification

Enclosure part no.	**For use with following protectors**
OVR WBX 4 or the secure OVR WBX 4/GS	1 OVR CME 4 and associated protectors
OVR WBX 8 or the secure OVR WBX 8/GS	1 OVR CME 8 and associated protectors
OVR WBX 16/2/G	1 or 2 OVR CME 16 and associated protectors
OVR WBX SLQ or OVR WBX SLQ/G	Up to 6 x OVR**Q, or up to 15 x OVR SL**

		OVR WBX 4 OVR WBX 4/GS	**OVR WBX 8 OVR WBX 8/GS**	**OVR WBX 16/2/G**	**OVR WBX SLQ OVR WBX SLQ/G**
ABB Order Code		7TCA085410R0048 7TCA085410R0049	7TCA085410R0050 7TCA085410R0051	7TCA085410R0047	7TCA085400R0326 7TCA085400R0327
Weight	– Unit	0.9 kg	1.3 kg	6.4 kg	0.7 kg
	– Packaged	0.95 kg	1.35 kg	7.6 kg	1.0 kg
Dimensions					
Length	– Internal	246 mm	225 mm	460 mm	230 mm
	– External	255 mm	235 mm	474 mm	250 mm
Width	– Internal	171 mm	225 mm	380 mm	105 mm
	– External	180 mm	235 mm	396 mm	125 mm
Depth	– Internal	119 mm	100 mm	120 mm	110 mm
	– External	125 mm	117 mm	128 mm	125 mm
Fixing centres (mm)		240 x 165	215 x 215	380 x 310	235 x 110
IP rating		IP66	IP66	IP56	IP67
Temperature range		-15 to +75 °C	-15 to +75 °C	-25 to +60 °C	-40 to +80 °C
Flammability		UL 94 V2	UL 94 V2	UL 94 V0	UL 746C 5V

Protection and safety

Protector accessories

OVR CME Series

OVR CME Series

OVR CME Series

Enables groups of protectors to be simultaneously mounted and earthed via their earth stud. Suitable for installing protectors with one or two earth studs on their top face. Available with 4, 8, 16 and 32 mounting holes.

Features & benefits

- Enables quick and easy installation of protectors for added convenience
- Speedy installation of groups of protectors saves time and money
- Individual protectors can be changed without needing to remove others
- Sturdy construction
- Supplied with a choice of flat and round ended fixing screws to suit your application



Assembly of OVR CME kit
Earth connection (not supplied)

Application

Use OVR CME kits to simultaneously mount and earth groups of single and double earth stud protectors. Each single earth stud protector requires one OVR CME mounting position and each double earth stud protector requires two OVR CME mounting positions, this includes:

- High conductivity copper with electro-tin plating and nylon insulating pillars, for low impedance to earth

Single earth stud protectors which are:

– OVR 06D	– OVR 06E	– OVR 06H	– OVR TN
– OVR 15D	– OVR 15E	– OVR 15H	– OVR RTD
– OVR 30D	– OVR 30E	– OVR 30H	– OVR CCTV/B
– OVR 50D	– OVR 50E	– OVR 50H	– OVR CCTV/T
– OVR 110D	– OVR 110E	– OVR 110H	– OVR RS485

Double earth stud protectors which are:

– OVR 240-16A

Once you know how many OVR CME mounting positions you require choose a OVR CME kit to suit:

– OVR CME 4 has 4 mounting positions
– OVR CME 8 has 8 mounting positions
– OVR CME 16 has 16 mounting positions
– OVR CME 32 has 32 mounting positions

Accessories

Enclosures suitable for a OVR CME 4 and its associated protectors: **(OVR WBX 4/GS)**, **OVR CME 8** and protectors **(OVR WBX 8/GS)** or one or two **OVR CME 16** and protectors **(OVR WBX 16/2/G)**

Installation

The earth bar is supported by a series of mounting pillars (which are fixed to the cubicle or box base). Protectors are attached to the OVR CME's earth bar via their earth stud(s) and earthed with shared connections to earth. We suggest one earth connection per mounting pillar.

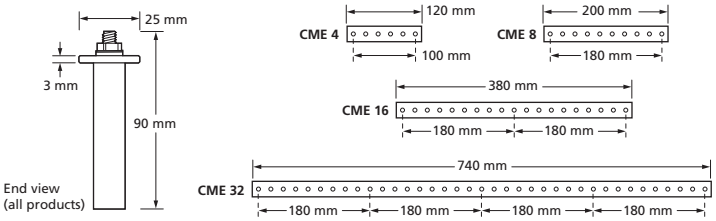

OVR CME Series - Technical specification

	OVR CME 4	OVR CME 8	OVR CME 16	OVR CME 32
ABB order code	7TCA085400R0414	7TCA085400R0415	7TCA085410R0045	7TCA085410R0046
Hole size	6.5 mm with 20 mm spacings			
Weight	0.1 kg	0.15 kg	0.3 kg	0.6 kg
Dimensions	See diagram opposite			

Protection and safety
Protector accessories
Accessories

Slim Line replacement base/module

Slim Line replacement base/module

Replacement: Base & module for the Slim Line Series of protectors

Part no. ABB Order Code	Description
Slim Line protector replacement base	
OVR SL/B 7TCA085400R0320	For use with standard and 4-20 mA Slim Line Series
OVR SL/I/B 7TCA085400R0321	Isolated screen version for use with standard and 4-20 mA Slim Line Series
OVR SLX/B 7TCA085400R0325	For use with Slim Line Intrinsically Safe (ATEX) Series
OVR SLX/I/B 7TCA085400R0374	Isolated screen version for use with Slim Line Intrinsically Safe (ATEX) Series
OVR SL/3W/B 7TCA085400R0319	For use with Slim Line 3-wire Series
OVR SLRTD/B 7TCA085400R0318	For use with Slim Line RTD Series
OVR SL RS485/B 7TCA085400R0316	For use with Slim Line RS485 Series
Slim Line protector replacement module	
OVR SLXX/M	For use with Slim Line Series - replace 'XX' with relevant voltage, i.e. 06, 15, 30, 50, 110
OVR SL06/M (7TCA085400R0375), OVR SL15/M (7TCA085400R0376), OVR SL30/M (7TCA085400R0377), OVR SL50/M (7TCA085400R0378), OVR SL110/M (7TCA085400R0379)	
OVR SLTN/M 7TCA085400R0324	For use with Slim Line TN Series
OVR SL15X/M 7TCA085400R0380	For use with Slim Line Instrinsically Safe (ATEX) Series, 15 V
OVR SL30X/M 7TCA085400R0381	For use with Slim Line Instrinsically Safe (ATEX) Series, 30 V
OVR SLRTD/M 7TCA085400R0322	For use with Slim Line RTD Series
OVR SLRS485/M 7TCA085400R0317	For use with Slim Line RS485 Series
Slim Line LED protector replacement module	
OVR SLXXL/M	For use with Slim Line LED Series - replace 'XX' with relevant voltage, i.e. 06, 15, 30, 50, 110
OVR SL06L/M (7TCA085400R0399), OVR SL15L/M (7TCA085400R0411), OVR SL30L/M (7TCA085400R0400), OVR SL50L/M (7TCA085400R0401), OVR SL110L/M (7TCA085400R0402)	
OVR SL30L/4-20/M 7TCA085400R0373	For use with Slim Line LED Series, 4-20 mA
OVR SL15XL/M 7TCA085400R0404	For use with Slim Line Instrinsically Safe (ATEX) LED Series, 15 V
OVR SL30XL/M 7TCA085400R0403	For use with Slim Line Instrinsically Safe (ATEX) LED Series, 30 V
OVR SLXX/3W/M	For use with Slim Line 3-wire LED Series – replace 'XX' with relevant voltage, i.e. 06, 15, 30, 50, 110
OVR SL06/3W/M (7TCA085400R0405), OVR SL15/3W/M (7TCA085400R0406), OVR SL30/3W/M (7TCA085400R0407), OVR SL50/3W/M (7TCA085400R0409), OVR SL110/3W/M (7TCA085400R0408)	
OVR SLTNL/M 7TCA085400R0468	For use with Slim Line TN LED Series

OVR RF mounting plates

OVR RF mounting plates

Use with: Any ESP RF protector to assist installation

Part no. ABB Order Code	Description
OVR RF BK1 7TCA085400R0416	Straight Mounting plate
OVR RF BK2 7TCA085450R0064	90º Mounting plate
OVR RF BK3 7TCA085400R0412	Bulkhead through mounting plate (single)
OVR RF BK4 7TCA085400R0413	Bulkhead through mounting plate (4 protectors)

OVR RF GDT-4

OVR RF GDT-4

Replacement: Gas Discharge Tubes for use with standard RF protectors

Part no. ABB Order Code	Description	Voltage
OVR RF GDT-4 7TCA085400R0309	Gas Discharge Tube	350 V

Cable assembly

Use with: OVR ISDN/RJ45-*/8 or OVR Cat-5e or OVR Cat-6 protector range

Part no. ABB Order Code	Description	Length
OVR CAT5e/UTP-1 7TCA085400R0294	Cable assembly for OVR Cat-5e with unshielded RJ45 connections	1 m
OVR CAT6/STP-2 7TCA085400R0295	Cable assembly for OVR Cat-6 with shielded RJ45 connections	2 m

Cable assembly with RJ45 connections for the OVR ISDN/RJ45-4/8 or OVR ISDN/RJ45-8/8 plug-in ISDN protectors for use if the standard 0.5 m cable is insufficient

Notes

E 90. Uncompromising performance

A safe and smart range designed for quick, flexible and error-proof installation

Compactness
The compact dimensions enable to close the switchboard door even when the fuse holder is open, thus ensuring total safety during maintenance.

Reliability
Venting grooves and cooling chambers improve heat dissipation even in multiple-pole configurations.

Completeness
The fuse tripping can be easily displayed, thanks to the special blown fuse indicator light.

Universal use
Screw holes have increased diameter to accomodate insulated screwdrivers and electric screwdrivers.

E 90. Uncompromising performance

A safe and smart range designed for quick, flexible and error-proof installation

Fuseholder profile has been designed for maximum ease of use: the 90° flip hinge with ergonomic knob, makes the replacement of fuses easier even in small spaces or when wearing protective gloves.

The compact dimensions enable to close the switchboard door even when the fuseholder is open, thus ensuring total safety during maintenance.

With the Prozidriv PZ2 screws tightening can be performed by exerting less torque than conventional screws, and the same electric screwdriver can be used for all terminals. Moreover, the PS connection busbars facilitate the connecting operations, making the wiring both simple and safe and providing complete integration with S 200 and SN 201 System pro M compact® circuit-breakers.

Venting grooves and cooling chambers improve heat dissipation even in multiple-pole configurations.
The reduced operating temperature inside fuseholders ensures durability and reliability of the devices over time.

Protection and safety

E 90 fuse switch disconnectors

E 90

Technical features

Type			E 90/20	E 90/32
Reference Standard			IEC 60947-3	IEC 60947-3 ; UL 4248-1
Type of current (acc. to IEC)			AC	AC
Type of current (acc. to UL)			-	AC/DC
Rated current		A	20	32
Fuse		[mm]	8.5 x 31.5	10.3 x 38
Max power dissipation accepted		[W]	2.5	
Rated frequency		[Hz]	50-60	
Tightening torque		[Nm]	PZ2 2-2.5*	
Wire strip length		[mm]	12	
Protection degree			IP20	
Rated insulation voltage		[kV]	1	
Short circuit current rating (SCCR)		[kA]	20	
Terminals cross-section		[mm²]	25	
Cross-section rigid copper conductors	1 wire		1.5-25 mm² (16-3 AWG)	
	2 wires		-	5 mm² (10 AWG)
Cross-section stranded copper conductors	1 wire		1.5-25 mm² (16-3 AWG)	
	2 wires		-	2-5 mm² (14-10 AWG)
Operating temperature		[°C]	-5/+40 (1)	
Storage temperature		[°C]	-25/+70 (2)	
Altitude		[m]	2000	
Degree of relative humidity at temperature °C			max. 90% with temp. +20 °C 50% with max. temp. +40 °C	
Voltage range for LED indicator light			24-1000 AC/DC (only s version)	
Padlockable (when open)				
Sealable (when closed)			■	■
IEC 60947-3				
Utilization category			AC-22B	AC-22B
Markings		[V]	400	400

(1) for lower temperature verify fuse technical characteristics, for higher temperature refer to derating table in Chapter 5 of Electrical installation solutions for buildings - Technical details
(2) for more than 24h max temperature is +55 °C
** PZ2 2.8 Nm in case of rigid copper conductors, 2 wires

Shock and vibration

Vibration withstand on the 3 main axis:

- Sinusoidal vibration testing according to IEC 60068-2-6: 2 to 13 Hz x = 1 mm peak; 13 to 100 Hz y = 0.7 g peak
- Random vibration testing according to IEC 61373: Category 1 Class B

Shock withstand

- Shock testing according to IEC 60068-2-27 : 15 g/11 ms/18 shocks
- Shock testing according to IEC 61373: Category 1 Class B

Materials

Plastic parts	**Case:**	**Material PA 6 +30% glass fibre**
		Self extinguishing class: V2 (UL94)
		Temperature resistance: 130 °C
	Opening handle	**Material PA 66 +25% glass fibre**
		Self-extinguishing class V0 (UL94)
		Temperature resistance: 140 °C
Metal parts	**Clips**	**Silver plated copper**
	Clip spring	**Stainless steel**
	Terminals	**Galvanized steel**

The E 90 series is environmental friendly and protects the health of people: all used materials are conform to the RoHS and REACH directives and they completely exclude hazardous substances and halogen.

Protection and safety

E 90 fuse switch disconnectors

E 92

E 90 fuse switch disconnectors

E 90 series fuse switch disconnectors are designed for switching circuits under load, providing protection against short circuits and overloads. The case is made of self-extinguishing thermoplastic material resistant to high temperatures (all materials are UL listed) while the contact clips are in silver plated copper.

E 90 fuse switch disconnectors can be sealed or padlocked to ensure operator safety during maintenance. Versions with blown fuse indicator allow to check whether the fuse is still working correctly or not. For easy and quick installation E 90 range is totally compatible with connecting bars, terminals and caps of S 200 MCBs.

Thanks to cURus approval, they can be installed in UL certified machines.

E 94

E 90 fuse switch disconnectors for 10.3 x 38 mm fuses (AC-22B)

Poles	Rated current	Modules	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In		EAN	Type code	Order code		kg	pc.
1	32	1	009238	E 91/32	2CSM200923R1801		0.061	6
1	32	1	024835	E 91/32s	2CSM202483R1801		0.062	6
1+N	32	2	008934	E 91N/32	2CSM200893R1801		0.130	3
1+N	32	2	515036	E 91N/32s	2CSM251503R1801		0.132	3
2	32	2	008835	E 92/32	2CSM200883R1801		0.122	3
2	32	2	514930	E 92/32s	2CSM251493R1801		0.132	3
3	32	3	047537	E 93/32	2CSM204753R1801		0.183	2
3	32	3	020639	E 93/32s	2CSM202063R1801		0.184	2
3+N	32	4	047339	E 93N/32	2CSM204733R1801		0.252	1
3+N	32	4	514831	E 93N/32s	2CSM251483R1801		0.255	1
4	32	4	047230	E 94/32	2CSM204723R1801		0.244	1
4	32	4	020530	E 94/32s	2CSM202053R1801		0.248	1

s: version with blown fuse indicator light

E 90 fuse switch disconnectors for 8.5 x 31.5 mm fuses (AC-22B)

Poles	Rated current	Modules	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In		EAN	Type code	Order code		kg	pc.
1	20	1	009832	E 91/20	2CSM200983R1801		0.061	6
1	20	1	024231	E 91/20s	2CSM202423R1801		0.062	6
2	20	2	009535	E 92/20	2CSM200953R1801		0.122	3
2	20	2	896234	E 92/20s	2CSM289623R1801		0.062	3
3	20	3	009436	E 93/20	2CSM200943R1801		0.183	2
3	20	3	896135	E 93/20s	2CSM289613R1801		0.184	2

s: version with blown fuse indicator light

Protection and safety

E 90h fuseholders

E 91hN

E 93hN

Technical features

Type		E 90hN/20	E 90hN/32
Reference Standard		IEC 60947-3	IEC 60947-3
Rated currrent	[A]	20	32
Type of current		AC	
Fuse	[mm]	8.5 x 31.5	10.3 x 38
Max power dissipation accepted	[W]	3	
Rated frequency	[Hz]	50-60	
Tightening torque	[Nm]	PZ2 0.8-1.2	
Wire strip length	[mm]	12	
Protection degree		IP20	
Rated insulation voltage	[kV]	1	
Short circuit current rating (SCCR)	[kA]	20	
Terminals cross-section	[mm²]	16	
Cross-section rigid copper conductors	[mm²]	1.5-16	
Cross-section stranded copper conductors	[mm²]	1.5-10	
Operating temperature	[°C]	-5/+40 (1)	
Storage temperature	[°C]	-25/+70 (2)	
Altitude	[m]	2000	
Degree of relative humidity at temperature °C		max. 90% with temp. +20 °C 50% with max. temp. +40 °C	
Voltage range for LED indicator light		24-1000 AC/DC (only s version)	
Padlockable (when open)			
Sealable (when closed)		■	
IEC 60269-3			
Rated voltage	[V]	400	

(1) for lower temperature verify fuse technical characteristics, for higher temperature refer to derating table in Chapter 5 of Electrical installation solutions for buildings - Technical details
(2) for more than 24h max temperature is +55 °C

Shock and vibration

Vibration withstand on the 3 main axis:

- Sinusoidal vibration testing according to IEC 60068-2-6: 2 to 13 Hz x = 1 mm peak; 13 to 100 Hz y = 0.7 g peak
- Random vibration testing according to IEC 61373: Category 1 Class B

Shock withstand

- Shock testing according to IEC 60068-2-27 : 15 g/11 ms/18 shocks
- Shock testing according to IEC 61373: Category 1 Class B

Materials

Plastic parts	**Case:**	**Material PA 6 +30 % glass fibre**
		Self extinguishing class: V2 (UL94)
		Temperature resistance: 130 °C
	Opening handle	**Material PA 66 +25 % glass fibre**
		Self-extinguishing class V0 (UL94)
		Temperature resistance: 140 °C

Protection and safety
E 90h fuseholders

Fuse indicator LED

E 90h fuseholders

E 90h fuseholders are suitable for protection against overloads and short circuits. Available in a single module 1P+N version and in a three-module 3P+N version, they are designed for use with gG and aM cylindrical fuse links. The body is made from self-extinguishing material resistant to high temperatures, while the contact clips are in silver-plated copper. E 90h fuseholders can be sealed or padlocked to assure operator safety during maintenance. Versions with blown fuse indicator allow to check whether the fuse is still working correctly or not.

E 90h fuseholders for 10.3 x 38 mm fuses

Poles	Rated current	Modules	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In		EAN	Type code	Order code		kg	pc.
1+N	32	1	009139	E 91hN/32	2CSM200913R1801		0.070	6
1+N	32	1	065739	E 91hN/32s	2CSM206573R1801		0.071	6
3+N	32	3	047438	E 93hN/32	2CSM204743R1801		0.192	2
3+N	32	3	743439	E 93hN/32s	2CSM274343R1801		0.200	2

s: version with blown fuse indicator light

E 90h fuseholders for 8.5 x 31.5 mm fuses

Poles	Rated current	Modules	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In		EAN	Type code	Order code		kg	pc.
1+N	20	1	009634	E 91hN/20	2CSM200963R1801		0.070	6
1+N	20	1	007036	E 91hN/20s	2CSM200703R1801		0.071	6
3+N	20	3	009337	E 93hN/20	2CSM200933R1801		0.192	2
3+N	20	3	896036	E 93hN/20s	2CSM289603R1801		0.200	2

s: version with blown fuse indicator light

Protection and safety

E 90 PV fuse disconnectors

E 90 PV

Technical features

Type		E 90/32 PV	E 90/32 PV according to UL
Rated current	[A]	32	30
Type of current		DC	
Fuse	[mm]	10 x 38	
Max power dissipation accepted	[W]	3	
Rated frequency	[Hz]	-	
Tightening torque		PZ2 2-2.5 Nm	PZ2 18-22 lb-in
Protection degree		IP20	
Rated insulation voltage	[kV]	1	
Terminals cross-section	[mm²]	25	
Cross-section rigid copper conductors		1.5 - 25 mm²	n..a.
Cross-section stranded copper conductors		1.5 - 16 mm²	8÷3 AWG
Operating temperature	[°C]	-5/+40 (1)	
Storage temperature	[°C]	-25/+70 (2)	
Altitude	[m]	2000	
Degree of relative humidity at temperature °C		max. 90% with temp. +20 °C 50% with max. temp. +40 °C	
Voltage range for LED indicator light		24-1000 AC/DC (only s version)	
Can be padlocked (open)		■	
Can be sealed (closed)		■	
IEC 60947-3			
Utilization category		DC-20B	
Rated voltage	[V]	1000	

(1) for lower temperature verify fuse technical characteristics, for higher temperature refer to derating table in Chapter 5 of Electrical installation solutions for buildings - Technical details
(2) for more than 24h max temperature is +55 °C

E 90 PV fuse disconnectors

E 90 PV series fuse disconnectors, designed for operating voltages of 1000 V DC with utilization category DC-20B, are particularly suited for protection against overcurrents of photovoltaic systems. The single-pole or two-pole E 90 PV disconnectors for 10.3 x 38 mm cylindrical fuse links offer a reliable, compact and affordable solution for photovoltaic installations. Versions with blown fuse indicator allow to check whether the fuse is still working correctly or not.

E 90 PV fuse disconnectors for 10.3 x 38 mm fuses (DC-20B)

Poles	Rated current	Modules	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In		EAN	Type code	Order code		kg	pc.
1	32	1	047131	E 91/32 PV	2CSM204713R1801		0.061	6
1	32	1	046936	E 91/32s PV	2CSM204693R1801		0.062	6
2	32	2	047032	E 92/32 PV	2CSM204703R1801		0.122	3
2	32	2	569138	E 92/32s PV	2CSM256913R1801		0.233	3

s: version with blown fuse indicator light

Protection and safety

E 90 PV 1500 fuse holder

E 90 PV 1500

Technical features

Type		E90/32 PV1500
Reference standards	-	IEC 60269-1,-2,-6 UL 4248-19
Rated current	[A]	32 (acc. IEC) / 30 (acc. UL)
Rated operational voltage	[V]	1500 V DC
Fuse size	[mm]	10×85 and 10/14×85
Max. power dissipation accepted	[W]	6
Tightening torque	[Nm]	PZ2 2-2.5 Nm (PZ2 18-22 lb-in)
Protection degree	-	IP20
Rated insulation voltage	[kV]	1
Cross section rigid copper conductors (1 wire)	[mm²]	16-10 AWG
Cross section stranded copper conductors (1 wire)	[mm²]	0.75 – 25 (18-4 AWG)
Cable temperature	[°C]	max 90 (acc. UL)
Operating temperature	[°C]	> -5
Storage temperature	[°C]	> -25
Degree of relative humidity at temperature °C		max. 90% with temp. +20 °C 50% with max. temp. +40 °C
Approvals	-	UL , CCC

E 90 PV fuse holder

The E 90 PV 1500 series of fuse holders has been designed for applications up 1500 V DC. Thanks to their rated voltage up to 1500 V DC they are the ideal solution for protecting cells and inverters. In case of maintenance, they ensure isolation of circuits and strings up to 1500 V in direct current, in total safety. The main features of E 90 PV 1500 fuse holders include venting grooves and cooling chambers which improved heat dissipation.

E 90 PV fuse holder for 10 × 85 mm and 10/14 × 85 mm fuses

Poles	Rated current	Width	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In		EAN	Type code	Order code		kg	pc.
1	32	22.5	020417	E91/32 PV1500e	2CSM202041R1801		0.080	5
1	32	22.5	743613	E91/32 PV1500e	2CSM274361U1801		0.080	60

Protection and safety

E 90 50/125 fuse disconnectors

E 90 50/125

Technical features

Type		E 90/50	E 90/125
Reference Standard		IEC 60947-3;UL 4248-1	IEC 60947-3;UL 4248-1
Type of current (acc. to IEC)		AC	AC
Type of current (acc. to UL)		AC/DC	AC/DC
Rated current	[A]	50	100*
Fuse	[mm]	14 x 51	22 x 58
Max power dissipation accepted	[W]	5	9.5
Rated frequency	[Hz]	50-60	
Tightening torque	[Nm]	PZ2 3-3.5	PZ2 3.5-4
Wire strip length	[mm]	12	
Protection degree		IP20**	
Rated insulation voltage	[V]	800	
Short circuit current rating (SCCR)	[kA]	120	
Terminals cross-section	[mm²]	35	50
Cross-section rigid copper conductors	[mm²]	2.5 - 35	4 - 50
Cross-section stranded copper conductors	[mm²]	2.5 - 25	4 - 35
Operating temperature	[°C]	-5/+40 (1)	
Storage temperature	[°C]	-25/+70 (2)	
Degree of relative humidity at temperature °C		max. 90% with temp. +20 °C 50% with max. temp. +40 °C	
Can be sealed closed		■	■
Can be padlocked open			■
IEC 60947-3			
Utilization category		AC-20B	
Rated voltage	[V]	690	

* For a rated current of 125A only fuse link type aM can be used in combination with a device which guarantees protection against overload.
** The protection degree IP20 is obtained also as standalone unit with respect to wire size ≥ 10 mm²
(1) for lower temperature verify fuse technical characteristics, for higher temperature refer to derating table in Chapter 5 of Electrical installation solutions for buildings - Technical details
(2) for more than 24h max temperature is +55 °C

Shock and vibration

Vibration withstand on the 3 main axis:

- Sinusoidal vibration testing according to IEC 60068-2-6: 2 to 13 Hz x = 1 mm peak; 13 to 100 Hz y = 0.7 g peak
- Random vibration testing according to IEC 61373: Category 1 Class B

Shock withstand

- Shock testing according to IEC 60068-2-27 : 15 g/11 ms/18 shocks
- Shock testing according to IEC 61373: Category 1 Class B

Materials

Plastic parts	**Case:**	**Material PA 66 +25 % glass fibre**
		Self-extinguishing class V0 (UL94)
		Temperature resistance: 140 °C
	Opening handle	**Material PA 66 +25 % glass fibre**
		Self-extinguishing class V0 (UL94)
		Temperature resistance: 140 °C

Protection and safety

E 90 50/125 fuse disconnectors

E90 50/125 fuse disconnectors

The E 90 50/125 fuse disconnector range is specifically intended for industrial circuit protection when currents are from 50 A to 125 A. They can, respectively, carry any type of cylindrical fuses 14x51 and 22x58 mm. The E 90 50/125 fuseholders can be sealed or padlocked in open position to ensure operator safety during maintenance operations. Versions with blown fuse indicator (LED) allow checking whether the fuse is still working correctly or not.

E 90/50 fuse disconnectors for 14 x 51 mm fuses (AC-20B)

Poles	Rated current In	Modules	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
				Type code	Order code			
1	50	1.5	790228	E 91/50	2CSM279022R1801		0.095	4
1	50	1.5	372028	E 91/50s	2CSM237202R1801		0.095	4
1+N	50	3	779827	E 91N/50	2CSM277982R1801		0.19	2
1+N	50	3	023920	E 91N/50s	2CSM202392R1801		0.19	2
2	50	3	779728	E 92/50	2CSM277972R1801		0.19	2
2	50	3	070320	E 92/50s	2CSM207032R1801		0.19	2
3	50	4.5	779629	E 93/50	2CSM277962R1801		0.285	1
3	50	4.5	574828	E 93/50s	2CSM257482R1801		0.285	1
3+N	50	6	779520	E 93N/50	2CSM277952R1801		0.38	1
3+N	50	6	563020	E 93N/50s	2CSM256302R1801		0.38	1

E 90/125 fuse disconnectors for 22 x 58 mm fuses (AC-20B)

Poles	Rated current In	Modules	Bbn 8012542 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
				Type code	Order code			
1	100	2	775720	E 91/125	2CSM277572R1801		0.135	4
1	100	2	896326	E 91/125s	2CSM289632R1801		0.135	4
1+N	100	4	773528	E 91N/125	2CSM277352R1801		0.27	2
1+N	100	4	049425	E 91N/125s	2CSM204942R1801		0.27	2
2	100	4	771326	E 92/125	2CSM277132R1801		0.27	2
2	100	4	049326	E 92/125s	2CSM204932R1801		0.27	2
3	100	6	775027	E 93/125	2CSM277502R1801		0.405	1
3	100	6	049227	E 93/125s	2CSM204922R1801		0.405	1
3+N	100	8	965329	E 93N/125	2CSM296532R1801		0.54	1
3+N	100	8	049128	E 93N/125s	2CSM204912R1801		0.54	1

s: version with blown fuse indicator light

Protection and safety
E 90 CC fuseholders

E91/30 CC

E93/30 CC

Technical features

Type			E 90/30 CC
Rated voltage		[V]	600
Rated current		[A]	30
Type of current			AC/DC
Rated frequency		[Hz]	60
Fuse			class CC
Rated insulation voltage		[kV]	1 + 2*U_n
Tightening torque		[Nm]	PZ2 2-2.5*
		[lb-in]	PZ2 18-22**
Terminals cross-section		[mm²]	25
Cross-section rigid copper conductors	1 wire		1.5-25 mm² (16-10 AWG)
	2 wires		5 mm² (10 AWG)
Cross-section stranded copper conductors	1 wire		1.5-16 mm² (16-3 AWG)
	2 wires		2-5 mm² (14-10 AWG)
Operating temperature		[°C]	-5/+40 (1)
Storage temperature		[°C]	-25/+70 (2)
Voltage range for LED indicator light (only s version)		[V]	24 - 1000 AC/DC
Degree of relative humidity at temperature °C			< 60%
Can be sealed closed			■
Can be padlocked open			■

* PZ2 2.8 Nm in case of rigid copper conductors, 2 wires
** PZ2 24,5 lb-in in case of rigid copper conductors, 2 wires
(1) for lower temperature verify fuse technical characteristics, for higher temperature refer to derating table in Chapter 5 of Electrical installation solutions for buildings - Technical details
(2) for more than 24h max temperature is +55 °C

The E 90 fuse carriers for Class CC cylindrical fuse links are specifically designed for the North American market in compliance with the UL standards. In accordance with the reference standards UL 4248-1 and UL 4248-4, they come in voltage and current ratings up to 600V and 30A. They are available in 1P, 1P+N, 2P, 3P, 3P+N and 4P versions. They can be padlocked open and sealed closed. The E 90 fuse carriers are the ideal solution for process control and industrial systems, automation systems, industrial installations and control circuits. The versions with blown fuse indicator light provide a visual signal of the fuse break condition.

E 90 for class CC cartridge fuses

Poles	Rated current	Modules	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In		EAN	Type code	Order code		kg	pc.
1	30	1	998723	E 91/30 CC	2CSM299872R1801		0.061	6
1	30	1	998822	E 91/30s CC	2CSM299882R1801		0.062	6
1+N	30	2	998921	E 91N/30 CC	2CSM299892R1801		0.13	3
1+N	30	2	999027	E 91N/30s CC	2CSM299902R1801		0.13	3
2	30	2	999126	E 92/30 CC	2CSM299912R1801		0.122	3
2	30	2	999225	E 92/30s CC	2CSM299922R1801		0.122	3
3	30	3	999324	E 93/30 CC	2CSM299932R1801		0.183	2
3	30	3	999423	E 93/30s CC	2CSM299942R1801		0.183	2
3+N	30	4	999522	E 93N/30 CC	2CSM299952R1801		0.252	1
3+N	30	4	999621	E 93N/30s CC	2CSM299962R1801		0.252	1
4	30	4	999720	E 94/30 CC	2CSM299972R1801		0.244	1
4	30	4	999829	E 94/30s CC	2CSM299982R1801		0.244	1

s: version with blown fuse indicator light

Protection and safety

E 90 J fuse fuseholders

E 90 Class J

Technical features

Type		E 90/30 J	E 90/60 J
Rated current	[A]	30	60
Rated voltage	[V]	600	
Type of current		AC/DC	
Fuse		Class J 1-30A	Class J 31-60A
Rated frequency	[Hz]	60	
Rated insulation voltage	[kV]	1 + 2*U_n	
Tightening torque	[Nm]	PZ2 3.5-4	
Terminals cross-section	[mm²]	50	
Cross-section rigid copper conductors	[AWG]	14-10	
Cross-section stranded copper conductors	[AWG]	14-8	
Operating temperature	[°C]	-5/+40 (1)	
Storage temperature	[°C]	-25/+70 (2)	
Degree of relative humidity at temperature °C		< 60%	
Can be sealed closed		■	
Can be padlocked open		■	

(1) for lower temperature verify fuse technical characteristics, for higher temperature refer to derating table in Chapter 5 of Electrical installation solutions for buildings - Technical details
(2) for more than 24h max temperature is +55 °C

E 90 Class J

The E 90 Class J fuse carriers are the ideal solution for industrial systems, industrial installations and control circuits. They are specifically designed for the North American market in compliance with the UL standards. In accordance with the reference standard UL 4248-8, they come in voltage and current ratings up to 600V and 30/60A. They are available in 1P, 2P and 3P versions. The versions with blown fuse indicator light provide a visual signal of the fuse break condition. They can be padlocked open and sealed closed to ensure operator safety during maintenance operations.

E 90/30 fuse disconnectors for Class J fuses

Poles	Rated current	Modules	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In		EAN	Type code	Order code		kg	pc.
1	30	2	048220	E 91/30 J	2CSM204822R1801		0.135	4
2	30	4	048121	E 92/30 J	2CSM204812R1801		0.27	2
3	30	6	048022	E 93/30 J	2CSM204802R1801		0.405	1
1	30	2	047926	E 91/30s J	2CSM204792R1801		0.135	4
2	30	4	047827	E 92/30s J	2CSM204782R1801		0.27	2
3	30	6	047728	E 93/30s J	2CSM204772R1801		0.405	1

E 90/60 fuse disconnectors for Class J fuses

Poles	Rated current	Modules	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In		EAN	Type code	Order code		kg	pc.
1	60	2.5	047629	E 91/60 J	2CSM204762R1801		0.175	3
2	60	5	049821	E 92/60 J	2CSM204982R1801		0.35	1
3	60	7.5	049722	E 93/60 J	2CSM204972R1801		0.525	1
1	60	2.5	049623	E 91/60s J	2CSM204962R1801		0.175	3
2	60	5	049524	E 92/60s J	2CSM204952R1801		0.35	1
3	60	7.5	738824	E 93/60s J	2CSM273882R1801		0.525	1

s: version with blown fuse indicator light

Protection and safety
Cylindrical fuses E 9F gG

E 9F8

E 9F10

Technical features

Rated voltage	[V]	400, 500, 690 AC
Rated current	[A]	0.5...125
Breaking capacity	[kA]	20, 80, 120
Overall dimensions	[mm]	8.5x31.5 , 10.3x38 , 14x51 , 22x58
Weight	[g]	4, 7, 18, 48
Reference standards		IEC 60269-2; ROHS 2002/98/CE
Marks		LLOYD, BV

E 9F 8 gG cylindrical fuses 8.5 x 31.5 mm

Type	Rated current [A]	Rated voltage [V AC]	Breaking capacity [kA]	Power dissipation at I_n [W]
E 9F8 GG1	1	400	20	0.35
E 9F8 GG2	2	400	20	0.45
E 9F8 GG4	4	400	20	0.6
E 9F8 GG6	6	400	20	0.83
E 9F8 GG8	8	400	20	1
E 9F8 GG10	10	400	20	1.2
E 9F8 GG12	12	400	20	1.3
E 9F8 GG16	16	400	20	1.7
E 9F8 GG20	20	400	20	2

E 9F 10 gG cylindrical fuses 10.3 x 38 mm

Type	Rated current [A]	Rated voltage [V AC]	Breaking capacity [kA]	Power dissipation at I_n [W]
E 9F10 GG05	0.5	500	120	0.07
E 9F10 GG1	1	500	120	0.45
E 9F10 GG2	2	500	120	0.5
E 9F10 GG4	4	500	120	0.85
E 9F10 GG6	6	500	120	0.95
E 9F10 GG8	8	500	120	1.15
E 9F10 GG10	10	500	120	1.3
E 9F10 GG12	12	500	120	1.4
E 9F10 GG16	16	500	120	1.9
E 9F10 GG20	20	500	120	2.4
E 9F10 GG25	25	500	120	2.7
E 9F10 GG32	32	400	120	2.8

Protection and safety
Cylindrical fuses E 9F gG

E 9F14

E 9F 14 gG cylindrical fuses 14 x 51 mm

Type	Rated current [A]	Rated voltage [V AC]	Breaking capacity [kA]	Power dissipation at I_n [W]
E 9F14 GG2	2	690	120	0.75
E 9F14 GG4	4	690	120	1.1
E 9F14 GG6	6	690	120	1.25
E 9F14 GG8	8	690	120	1.45
E 9F14 GG10	10	690	120	1.65
E 9F14 GG12	12	690	120	1.8
E 9F14 GG16	16	690	120	2.35
E 9F14 GG20	20	690	120	2.75
E 9F14 GG25	25	690	120	3.1
E 9F14 GG32	32	500	120	3.6
E 9F14 GG40	40	500	120	4
E 9F14 GG50	50	500	120	4.8

E 9F22

E 9F 22 gG cylindrical fuses 22 x 58 mm

Type	Rated current [A]	Rated voltage [V AC]	Breaking capacity [kA]	Power dissipation at I_n [W]
E 9F22 GG4	4	690	120	1.25
E 9F22 GG6	6	690	120	1.4
E 9F22 GG8	8	690	120	1.6
E 9F22 GG10	10	690	120	1.9
E 9F22 GG12	12	690	120	2
E 9F22 GG16	16	690	120	2.5
E 9F22 GG20	20	690	120	3.4
E 9F22 GG25	25	690	120	3.5
E 9F22 GG32	32	690	120	3.7
E 9F22 GG40	40	690	120	4.3
E 9F22 GG50	50	690	120	5.3
E 9F22 GG63	63	690	120	6.3
E 9F22 GG80	80	690	120	7.4
E 9F22 GG100	100	500	120	8.3

Protection and safety
Cylindrical fuses E 9F gG

E 9F gG cylindrical fuses
The E 9F gG cylindrical fuses, coupled with E 90 and E 90 50/125 fuse disconnectors, are the ideal solution for protection against overload and short-circuit. They feature a fast tripping curve that is ideal for protecting electronic devices, transformers and electric cables. The E 9F gG series is available for all the main sizes (8.5 x 31.5 mm, 10.3 x 38 mm, 14 x 51 mm e 22 x 58 mm) and with a wide range of rated current values (from 1 A to 125 A and up to 690 V AC). All the E 9F series fuses conform to the RoHS directive and are type-approved in accordance with the most important international naval marks.

E 9F8

E 9F 8 gG cylindrical fuses 8.5 x 31.5 mm

Rated current	Size	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
In	mm	EAN	Type code	Order code		kg	pc.
1	8.5x31.5	575733	E 9F8 GG1	2CSM257573R1801		0.004	10
2	8.5x31.5	563938	E 9F8 GG2	2CSM256393R1801		0.004	10
4	8.5x31.5	586630	E 9F8 GG4	2CSM258663R1801		0.004	10
6	8.5x31.5	574835	E 9F8 GG6	2CSM257483R1801		0.004	10
8	8.5x31.5	563037	E 9F8 GG8	2CSM256303R1801		0.004	10
10	8.5x31.5	775737	E 9F8 GG10	2CSM277573R1801		0.004	10
12	8.5x31.5	773535	E 9F8 GG12	2CSM277353R1801		0.004	10
16	8.5x31.5	771333	E 9F8 GG16	2CSM277133R1801		0.004	10
20	8.5x31.5	775034	E 9F8 GG20	2CSM277503R1801		0.004	10

E 9F10

E 9F 10 gG cylindrical fuses 10.3 x 38 mm

Rated current	Size	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
In	mm	EAN	Type code	Order code		kg	pc.
0.5	10.3x38	773337	E 9F10 GG05	2CSM277333R1801		0.007	10
1	10.3x38	771135	E 9F10 GG1	2CSM277113R1801		0.007	10
2	10.3x38	587231	E 9F10 GG2	2CSM258723R1801		0.007	10
4	10.3x38	575436	E 9F10 GG4	2CSM257543R1801		0.007	10
6	10.3x38	563631	E 9F10 GG6	2CSM256363R1801		0.007	10
8	10.3x38	586333	E 9F10 GG8	2CSM258633R1801		0.007	10
10	10.3x38	574538	E 9F10 GG10	2CSM257453R1801		0.007	10
12	10.3x38	562733	E 9F10 GG12	2CSM256273R1801		0.007	10
16	10.3x38	775430	E 9F10 GG16	2CSM277543R1801		0.007	10
20	10.3x38	773238	E 9F10 GG20	2CSM277323R1801		0.007	10
25	10.3x38	771036	E 9F10 GG25	2CSM277103R1801		0.007	10
32	10.3x38	587132	E 9F10 GG32	2CSM258713R1801		0.007	10

Protection and safety
Cylindrical fuses E 9F gG

E 9F14

E 9F 14 gG cylindrical fuses 14 x 51 mm

Rated current	Size	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
In	mm	EAN	Type code	Order code		kg	pc.
2	14x51	775232	E 9F14 GG2	2CSM277523R1801		0.018	10
4	14x51	773030	E 9F14 GG4	2CSM277303R1801		0.018	10
6	14x51	770831	E 9F14 GG6	2CSM277083R1801		0.018	10
8	14x51	910039	E 9F14 GG8	2CSM291003R1801		0.018	10
10	14x51	909835	E 9F14 GG10	2CSM290983R1801		0.018	10
12	14x51	909637	E 9F14 GG12	2CSM290963R1801		0.018	10
16	14x51	587835	E 9F14 GG16	2CSM258783R1801		0.018	10
20	14x51	576037	E 9F14 GG20	2CSM257603R1801		0.018	10
25	14x51	564232	E 9F14 GG25	2CSM256423R1801		0.018	10
32	14x51	586937	E 9F14 GG32	2CSM258693R1801		0.018	10
40	14x51	575139	E 9F14 GG40	2CSM257513R1801		0.018	10
50	14x51	563334	E 9F14 GG50	2CSM256333R1801		0.018	10

E 9F22

E 9F 22 gG cylindrical fuses 22 x 58 mm

Rated current	Size	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
In	mm	EAN	Type code	Order code		kg	pc.
4	22x58	571834	E 9F22 GG4	2CSM257183R1801		0.048	10
6	22x58	592839	E 9F22 GG6	2CSM259283R1801		0.048	10
8	22x58	581031	E 9F22 GG8	2CSM258103R1801		0.048	10
10	22x58	569237	E 9F22 GG10	2CSM256923R1801		0.048	10
12	22x58	594031	E 9F22 GG12	2CSM259403R1801		0.048	10
16	22x58	582236	E 9F22 GG16	2CSM258223R1801		0.048	10
20	22x58	570431	E 9F22 GG20	2CSM257043R1801		0.048	10
25	22x58	595335	E 9F22 GG25	2CSM259533R1801		0.048	10
32	22x58	583530	E 9F22 GG32	2CSM258353R1801		0.048	10
40	22x58	571735	E 9F22 GG40	2CSM257173R1801		0.048	10
50	22x58	593935	E 9F22 GG50	2CSM259393R1801		0.048	10
63	22x58	582137	E 9F22 GG63	2CSM258213R1801		0.048	10
80	22x58	570332	E 9F22 GG80	2CSM257033R1801		0.048	10
100	22x58	595236	E 9F22 GG100	2CSM259523R1801		0.048	10

Protection and safety
Cylindrical fuses E 9F aM

E 9F8 aM

Technical features

Rated voltage	[V]	400, 500, 690 AC
Rated current	[A]	0.5...125
Breaking capacity	[kA]	20, 80, 120
Overall dimensions	[mm]	8.5x31.5, 10.3x38, 14x51, 22x58
Weight	[g]	4, 7, 18, 48
Reference standards		IEC 60269-2; ROHS 2002/98/CE
Marks		LLOYD, BV

E 9F10 aM

E 9F8 aM cylindrical fuses 8.5 x 31.5 mm

Type	Rated current [A]	Rated voltage [V AC]	Breaking capacity [kA]	Power dissipation at I_n [W]
E 9F1 AM1	1	400	20	0.9
E 9F8 AM2	2	400	20	0.15
E 9F8 AM4	4	400	20	0.26
E 9F8 AM6	6	400	20	0.35
E 9F8 AM8	8	400	20	0.47
E 9F8 AM10	10	400	20	0.55

E 9F10 aM cylindrical fuses 10.3 x 38 mm

Type	Rated current [A]	Rated voltage [V AC]	Breaking capacity [kA]	Power dissipation at I_n [W]
E 9F10 AM05	0.5	500	120	0.07
E 9F10 AM1	1	500	120	0.1
E 9F10 AM2	2	500	120	0.14
E 9F10 AM4	4	500	120	0.28
E 9F10 AM6	6	500	120	0.38
E 9F10 AM8	8	500	120	0.55
E 9F10 AM10	10	500	120	0.62
E 9F10 AM12	12	500	120	0.82
E 9F10 AM16	16	500	120	0.87
E 9F10 AM20	20	500	120	1.05
E 9F10 AM25	25	400	120	1.2
E 9F10 AM32	32	400	120	1.8

Protection and safety
Cylindrical fuses E 9F aM

E 9F14 aM

E 9F14 aM cylindrical fuses 14 x 51 mm

Type	Rated current [A]	Rated voltage [V AC]	Breaking capacity [kA]	Power dissipation at I_n [W]
E 9F14 AM1	1	690	120	0.13
E 9F14 AM2	2	690	120	0.18
E 9F14 AM4	4	690	120	0.28
E 9F14 AM6	6	690	120	0.42
E 9F14 AM8	8	690	120	0.55
E 9F14 AM10	10	690	120	0.65
E 9F14 AM12	12	690	120	0.75
E 9F14 AM16	16	690	120	1.05
E 9F14 AM20	20	690	120	1.3
E 9F14 AM25	25	690	120	1.55
E 9F14 AM32	32	500	120	2.05
E 9F14 AM40	40	500	120	2.65
E 9F14 AM45	45	500	120	2.85
E 9F14 AM50	50	500	120	2.95

E 9F22 aM

E 9F22 aM cylindrical fuses 22 x 58 mm

Type	Rated current [A]	Rated voltage [V AC]	Breaking capacity [kA]	Power dissipation at I_n [W]
E 9F22 AM6	6	690	120	0.45
E 9F22 AM8	8	690	120	0.6
E 9F22 AM10	10	690	120	0.75
E 9F22 AM12	12	690	120	0.85
E 9F22 AM16	16	690	120	1.15
E 9F22 AM20	20	690	120	1.35
E 9F22 AM25	25	690	120	1.7
E 9F22 AM32	32	690	120	2.2
E 9F22 AM40	40	690	120	2.7
E 9F22 AM50	50	690	120	3.6
E 9F22 AM63	63	690	120	4.8
E 9F22 AM80	80	690	120	6.2
E 9F22 AM100	100	500	120	6.65
E 9F22 AM125	125	500	120	9.9

Protection and safety
Cylindrical fuses E 9F aM

E 9F8

E 9F aM cylindrical fuses
The E 9F aM cylindrical fuses, coupled with E 90 and E 90 50/125 fuse disconnectors, are the ideal solution for protection against overload and short-circuit. They feature a delayed tripping curve and are therefore ideal for protecting industrial motors that require high inrush current during the starting phase. The E 9F aM series is available for all the main sizes (8.5 x 31.5 mm, 10.3 x 38 mm, 14 x 51 mm e 22 x 58 mm) and with a wide range of rated current values (from 1 A to 125 A and up to 690 V AC). All the E 9F series fuses conform to the RoHS directive and are type-approved in accordance with the most important international naval marks.

E 9F 8 aM cylindrical fuses 8.5 x 31.5 mm

Rated current	Size	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
In	mm	EAN	Type code	Order code		kg	pc.
1	8.5x31.5	772835	E 9F8 AM1	2CSM277283R1801		0.004	10
2	8.5x31.5	770633	E 9F8 AM2	2CSM277063R1801		0.004	10
4	8.5x31.5	587439	E 9F8 AM4	2CSM258743R1801		0.004	10
6	8.5x31.5	575634	E 9F8 AM6	2CSM257563R1801		0.004	10
8	8.5x31.5	563839	E 9F8 AM8	2CSM256383R1801		0.004	10
10	8.5x31.5	586531	E 9F8 AM10	2CSM258653R1801		0.004	10

E 9F10 aM

E 9F 10 aM cylindrical fuses 10.3 x 38 mm

Rated current	Size	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
In	mm	EAN	Type code	Order code		kg	pc.
0.5	10.3x38	574736	E 9F10 AM05	2CSM257473R1801		0.007	10
1	10.3x38	562931	E 9F10 AM1	2CSM256293R1801		0.007	10
2	10.3x38	775638	E 9F10 AM2	2CSM277563R1801		0.007	10
4	10.3x38	773436	E 9F10 AM4	2CSM277343R1801		0.007	10
6	10.3x38	771234	E 9F10 AM6	2CSM277123R1801		0.007	10
8	10.3x38	587330	E 9F10 AM8	2CSM258733R1801		0.007	10
10	10.3x38	575535	E 9F10 AM10	2CSM257553R1801		0.007	10
12	10.3x38	563730	E 9F10 AM12	2CSM256373R1801		0.007	10
16	10.3x38	586432	E 9F10 AM16	2CSM258643R1801		0.007	10
20	10.3x38	574637	E 9F10 AM20	2CSM257463R1801		0.007	10
25	10.3x38	562832	E 9F10 AM25	2CSM256283R1801		0.007	10
32	10.3x38	775539	E 9F10 AM32	2CSM277553R1801		0.007	10

Protection and safety
Cylindrical fuses E 9F aM

E 9F14 aM

E 9F 14 aM cylindrical fuses 14 x 51 mm

Rated current	Size	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
In	mm	EAN	Type code	Order code		kg	pc.
1	14x51	575337	E 9F14 AM1	2CSM257533R1801		0.018	10
2	14x51	563532	E 9F14 AM2	2CSM256353R1801		0.018	10
4	14x51	586234	E 9F14 AM4	2CSM258623R1801		0.018	10
6	14x51	574439	E 9F14 AM6	2CSM257443R1801		0.018	10
8	14x51	562634	E 9F14 AM8	2CSM256263R1801		0.018	10
10	14x51	775331	E 9F14 AM10	2CSM277533R1801		0.018	10
12	14x51	773139	E 9F14 AM12	2CSM277313R1801		0.018	10
16	14x51	770930	E 9F14 AM16	2CSM277093R1801		0.018	10
20	14x51	587033	E 9F14 AM20	2CSM258703R1801		0.018	10
25	14x51	575238	E 9F14 AM25	2CSM257523R1801		0.018	10
32	14x51	563433	E 9F14 AM32	2CSM256343R1801		0.018	10
40	14x51	586135	E 9F14 AM40	2CSM258613R1801		0.018	10
45	14x51	574330	E 9F14 AM45	2CSM257433R1801		0.018	10
50	14x51	562535	E 9F14 AM50	2CSM256253R1801		0.018	10

E 9F22

E 9F 22 aM cylindrical fuses 22 x 58 mm

Rated current	Size	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
In	mm	EAN	Type code	Order code		kg	pc.
6	22x58	586036	E 9F22 AM6	2CSM258603R1801		0.048	10
8	22x58	574231	E 9F22 AM8	2CSM257423R1801		0.048	10
10	22x58	562436	E 9F22 AM10	2CSM256243R1801		0.048	10
12	22x58	775133	E 9F22 AM12	2CSM277513R1801		0.048	10
16	22x58	772934	E 9F22 AM16	2CSM277293R1801		0.048	10
20	22x58	770732	E 9F22 AM20	2CSM277073R1801		0.048	10
25	22x58	774938	E 9F22 AM25	2CSM277493R1801		0.048	10
32	22x58	772736	E 9F22 AM32	2CSM277273R1801		0.048	10
40	22x58	770534	E 9F22 AM40	2CSM277053R1801		0.048	10
50	22x58	594130	E 9F22 AM50	2CSM259413R1801		0.048	10
63	22x58	582335	E 9F22 AM63	2CSM258233R1801		0.048	10
80	22x58	570530	E 9F22 AM80	2CSM257053R1801		0.048	10
100	22x58	595434	E 9F22 AM100	2CSM259543R1801		0.048	10
125	22x58	583639	E 9F22 AM125	2CSM258363R1801		0.048	10

Protection and safety

Cylindrical fuses E 9F gPV

E 9F PV

Type		E9F PV	E9F PV 1500
Reference standards	-	IEC 60269-6; ROHS 2002/98/CE, UL	IEC 60269-6; ROHS 2002/98/CE, UL
Rated current	[A]	1...30	4...32
Rated operational voltage	[V]	1000 DC	1500 DC
Breaking capacity	[kA]	10	50
Overall dimensions	[mm]	10.3 x 38	10 x 85

E 9F PV cylindrical fuses for photovoltaic applications

The E9F PV series of cylindrical fuses has been specifically designed for protecting direct current circuits up to 1500 V DC. Those fuses are the best way to protect the strings, inverters and surge arresters in photovoltaic installations.

The range of E9F PV fuses is available in the 10.3 x 38 mm size for up to 30 A rated current values at a nominal voltage of 1000 V DC or in the 10x85 mm size up to 32 A rated current at a nominal voltage of 1500 V DC.

E 9F PV cylindrical fuses 10.3 x 38 mm

Rated current	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
In	EAN	Type code	Order code		kg	pc.
1 A	134565	E 9F1 PV	2CSM213456R1801		0.007	10
2 A	134664	E 9F2 PV	2CSM213466R1801		0.007	10
3 A	134763	E 9F3 PV	2CSM213476R1801		0.007	10
4 A	134862	E 9F4 PV	2CSM213486R1801		0.007	10
5 A	134961	E 9F5 PV	2CSM213496R1801		0.007	10
6 A	135067	E 9F6 PV	2CSM213506R1801		0.007	10
8 A	135265	E 9F8 PV	2CSM213526R1801		0.007	10
10 A	135364	E 9F10 PV	2CSM213536R1801		0.007	10
12 A	135463	E 9F12 PV	2CSM213546R1801		0.007	10
15 A	135562	E 9F15 PV	2CSM213556R1801		0.007	10
20 A	135661	E 9F20 PV	2CSM213566R1801		0.007	10
25 A	135760	E 9F25 PV	2CSM213576R1801		0.007	10
30 A	135869	E 9F30 PV	2CSM213586R1801		0.007	10

E9F PV cylindrical fuses 10 x 85 mm

Rated current	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
In	EAN	Type code	Order code		kg	pc.
4 A	339410	E9F4 PV1500	2CSM233941R1801		0.010	5
5 A	052852	E9F5 PV1500	2CSM205285R1801		0.010	5
6 A	052951	E9F6 PV1500	2CSM205295R1801		0.010	5
7 A	053057	E9F7 PV1500	2CSM205305R1801		0.010	5
8 A	053156	E9F8 PV1500	2CSM205315R1801		0.010	5
10 A	053255	E9F10 PV1500	2CSM205325R1801		0.010	5
12 A	053354	E9F12 PV1500	2CSM205335R1801		0.010	5
15 A	053453	E9F15 PV1500	2CSM205345R1801		0.010	5
20 A	068754	E9F20 PV1500	2CSM206875R1801		0.010	5
25 A	068952	E9F25 PV1500	2CSM206895R1801		0.010	5
30 A	069058	E9F30 PV1500	2CSM206905R1801		0.010	5
32 A	069256	E9F32 PV1500	2CSM206925R1801		0.010	5

Protection and safety

ILTS-E D0 Fuse-switch-disconnectors

ILTS-E1

ILTS-E1

ILTS-E3

ILTS-E/H11

ILTS-E/RE

Technical data

Reference standards	EN 60947-1, EN 60947-3
Approval	VDE
No. of poles	1, 2, 3 pole and 3 pole+N
Rated voltage	400 V AC, per pole 65 V DC (2 pole 130 V DC)
Operating current In	acc. to fuse link D0 2-63 A
Rated frequency	50/60 Hz
Rated short circuit capacity	50 kA for AC (8 kA for DC)
Power loss	5.5 W/pole
Utilization category	AC 22 B: 400 V AC 63 A according to IEC/EN 60947-3 (all versions)
	DC 22 B: 65 V DC 63 A according to IEC/EN 60947-3 (1 pole)
	DC 22 B: 130 V DC 63 A according to IEC/EN 60947-3 (2 pole)
Leakage current resistance	CTI 200
Overvoltage category in accordance with IEC / EN 61439-1	III
Ambient temperature	– 5 °C up to + 40 °C
Casing material	thermoplast; halogen-, phosphor-, silicone- and CFC-free
Fire classification	UL 94 (self-extinguishing)
Shock protection	according to DIN EN 50 274 (DIN VDE 0660 Part 514) BGV A3
Connection capacity	1.5 – 35 mm2 finely stranded, directly clamped or with connector sleeve Twin-function terminal for simultaneous connection of two conductors (35 mm2 and 16 mm²) or conductor and busbar
Pick-up torque	2.5 – 3 Nm
Auxiliary switch indicating contact position	
Contacts	1 NO contact + 1 NC contact
Contact rating	AC 13: 2 A/400 V, 6 A/230 V DC 13: 1 A/220 V, 6 A/24 V

Switch-disconnector ILTS-E for D0 2-63 A fuse links “Drawer technology”

User-friendly fuse-switch-disconnector in “drawer technology”:

- Snap action
- Fuse can be replaced only if the system is de-energized.
- Captive fuse carrier
- For D02 fuse links, D01 fuse link with reducing piece
- Twin box terminal on both sides
- User-friendly installation of cross-wiring in lower terminal
- Auxiliary switch to indicate switching position

Fuse-switch-disconnector

Poles	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
1	65347 3	ILTS-E1	2CDE101001R1901		0.210	3
2	65348 0	ILTS-E2	2CDE102001R1901		0.420	2
3	65349 7	ILTS-E3	2CDE103001R1901		0.630	1
3+N*	65350 3	ILTS-E3+N	2CDE103101R1901		0.790	1
Reducing piece	65407 4	ILTS-E/RE	2CDE000011R1901		0.001	20
Auxiliary switch 1NO/1NC	65671 9	ILTS-E/H11	2CDE000012R1901		0.050	1

* N conductor leading make contact, late closing

Protection and safety

ISS D0 Fuse carriers

ISS 16/1

ISS 63/1

ISS 16/3

ISS 63/3

Technical features

Size	D01	D02
Current type	AC (50 Hz)/DC	AC (50 Hz)/DC
Rated voltage	400 V AC/250 V DC	400 V AC/250 V DC
Rated current	16 A	63 A
Rated short-circuit current	50 kA (AC) 8 kA (DC)	50 kA (AC) 8 kA (DC)
For fuse links with losses per phase up to	2.5 W	5.5 W

D0 fuse carrier ISS with integrated red cover

D0 fuse base for NEOZED fuse links D01/D02. Touch-protection according to DGUV regulation 3. Twin box terminal on both sides for connection of two different conductor cross-sections or conductors and busbars.

Conductor cross-sections incoming and outing 1.5 – 35 mm^2, stranded. With integrated terminal cover. A separate cover for distribution board installation is not required.

- IEC 60269-3/VDE 0636-3
- 1/3-pole
- Fuse links, connector sleeves VDE 0636-3
- Snap clip device for rail mounting to EN 60715
- Twin function terminal
- Connection cross-section 1.5 – 35 mm^2
- Tightening torque 2.5 – 3 Nm

D0 fuse carrier

Poles	Screw cover/fuse	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
1	E14 D01	65579 8	ISS 16/1	2CDE111001R1902		0.08	9
1	E18 D02	65581 1	ISS 63/1	2CDE161001R1902		0.08	9
3	E14 D01	65580 4	ISS 16/3	2CDE113001R1902		0.24	9
3	E18 D02	65582 8	ISS 63/3	2CDE163001R1902		0.24	9

Protection and safety

Busbars and accessories for ILTS-E and ISS



ISS, 1pole
PS 1/39/16 ILTS-E
PS 1/39/30 ILTS-E



ISS, 3pole
PS 3/39/16 ILTS-E
PS 3/39/30 ILTS-E



ILTS-E, 1pole
PS 1/39/16 ILTS-E
PS 1/39/30 ILTS-E



ILTS-E, 3pole
PS 3/39/16 ILTS-E
PS 3/39/30 ILTS-E

Fuse links
D 01
2-16 A

D 02
20-63 A

D0 screw caps

Busbars for fuse-switch-disconnector ILTS-E and fuse carrier ISS: 1pole or 3pole
End caps:
PS 1/39/16 ILTS-E: END 1.1
PS 1/39/30 ILTS-E: PS-END 3.2
PS 3/39/16 ILTS-E: PS-END
PS 3/39/30 ILTS-E: PS-END 3

Busbars

Cross-section	Length	No. of poles	Cu factor	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
mm²	mm			EAN	Type code	Order code		kg	pc.
16	1040	39 x 1	0.43	66956 6 (1)	PS 1/39/16 ILTS-E	2CDL010101R1639	15	0.23	10
30	1040	39 x 1	0.74	66957 3 (1)	PS 1/39/30 ILTS-E*	2CDL010101R3039	15	0.487	5
16	1040	39 x 3	1.3	66958 0 (1)	PS 3/39/16 ILTS-E	2CDL030101R1639	15	0.59	10
30	1040	39 x 3	1.95	66959 7 (1)	PS 3/39/30 ILTS-E*	2CDL030101R3039	15	1.222	5

(1) bbn-Nr. 40 16779 * Not compatible with ISS

End caps

Cross-section	Length	No. of poles	Cu factor	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
mm²	mm			EAN	Type code	Order code		kg	pc.
		1		63891 3	END 1.1	2CDL200011R0011	15	0.001	50
		2/3		51472 9	PS-END	2CDL200001R0001	15	0.001	50
		2/3		65430 2	PS-END 3	2CDL200001R3001	15	0.001	50
		1		66960 3	PS-END 3.2	2CDL200001R3003	15	0.001	50

D0 fuses and accessories

D0 fuse links to DIN VDE 0636-3, IEC/EN 60269-3 suitable for D01/E14

Rated current	Colour code	Power loss	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
A		W	EAN	Type code	Order code		kg	pc.
2	pink	1.5	60480 7	D01 x 2 gG	GMN 977120P0011	13	0.006	10
4	brown	1.5	60490 6	D01 x 4 gG	GMN 977120P0012	13	0.006	10
6	green	1.5	60500 2	D01 x 6 gG	GMN 977120P0013	13	0.006	10
10	red	1.8	60510 1	D01 x 10 gG	GMN 977120P0014	13	0.006	10
16	grey	2.1	60520 0	D01 x 16 gG	GMN 977120P0015	13	0.006	10

Suitable for D02/E18

Rated current	Colour code	Power loss	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
A		W	EAN	Type code	Order code		kg	pc.
20	blue	2.3	60530 9	D02 x 20 gG	GMN 977120P0017	13	0.011	10
25	yellow	2.6	60540 8	D02 x 25 gG	GMN 977120P0018	13	0.012	10
35	black	2.9	60550 7	D02 x 35 gG	GMN 977120P0019	13	0.013	10
50	white	3.5	60560 6	D02 x 50 gG	GMN 977120P0020	13	0.014	10
63	copper	4.2	60570 5	D02 x 63 gG	GMN 977120P0021	13	0.015	10

Protection and safety

Busbars and accessories for ILTS-E and ISS

Connector sleeves
D 01 **D 02**
2-10 A **2-50 A**

FD 1713

D0 screw caps acc. to DIN EN 60269-1 and DIN VDE 0636-3, 400 VAC
Plastic version, RAL 7035

Rated current	Fuse type	Power loss	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
A		W	EAN	Type code	Order code		kg	pc.
16	D01 (E14)	–	11782 0	D01-DIN-E14-16A	2CDE977130P0011		0.006	20
63	D02 (E18)	–	11784 4	D02-DIN-E18-63A	2CDE977130P0012		0.010	20

D0 connector sleeves to DIN VDE 0636-3, IEC/EN 60269-3
Suitable for D01/E14

Rated current	Colour code	Power loss	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
A		W	EAN	Type code	Order code		kg	pc.
2	pink	–	60600 9	D01 x 2	GMN 977125P0001	13	0.001	50
4	brown		60610 8	D01 x 4	GMN 977125P0002	13	0.001	50
6	green		60620 7	D01 x 6	GMN 977125P0003	13	0.001	50
10	red		60630 6	D01 x 10	GMN 977125P0004	13	0.001	50

Suitable for D02/E18

Rated current	Colour code	Power loss	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
A		W	EAN	Type code	Order code		kg	pc.
2	pink	–	60640 5	D02 x 2	GMN 977125P0011	13	0.001	50
4	brown		60650 4	D02 x 4	GMN 977125P0012	13	0.001	50
6	green		60660 3	D02 x 6	GMN 977125P0013	13	0.001	50
10	red		60670 2	D02 x 10	GMN 977125P0014	13	0.001	50
16	grey		60680 1	D02 x 16	GMN 977125P0015	13	0.001	50
20	blue		60690 0	D02 x 20	GMN 977125P0016	13	0.001	50
25	yellow		60700 6	D02 x 25	GMN 977125P0017	13	0.001	50
35	black		60710 5	D02 x 35	GMN 977125P0018	13	0.001	50
50	white		60720 4	D02 x 50	GMN 977125P0019	13	0.001	50

Spring clip for use of D01 fuses in D02 screw caps

Rated current	Colour code	Power loss	Bbn 4012233	Order details		Price 1 piece	Weight 1 piece	Pack unit
A		W	EAN	Type code	Order code		kg	pc.
			15120 7	FD 1713	GMN 977130P0004	13	0.001	50

Protection and safety

Electronic protection devices | 4 channel

EPD24-A4 0.5-12,
Power jumper for 24 V DC and signal jumper for 0 V, signal and reset

UL 508
CSA C22.2 No. 14
Ind. Cont. Eq.
E321314

Selective protection of 24 V DC load circuits

Electronic protection devices are used for the reliable protection of standard components in industrial automation applications with 24 V DC. The EPD24 offer selective overcurrent protection for the loads connected and react to short circuit or overload more rapidly than the supplying switch mode power supply; they then selectively switch off the electrical circuit affected. In this way straightforward, quick troubleshooting is made possible.

The 4-channel devices feature very high efficiency and significantly reduced power loss. With a rated current setting from 0.5 to 12 A, a width of 25 mm, seamless expandability by means of jumpers, front-top wiring and straightforward combination with ABB switch mode power supplies, they ensure a uniform portfolio.

Characteristics

- 4-channel electronic protection device
- 24 V DC supply terminal
- Variable rated currents can be set on **Advanced** from 0.5 A to 12 A or on **Entry** from 1 A to 10 A
- Selective load protection using electronic trip characteristic curve
- **Advanced** with active linear current limiting, total current max. 48 A
- **Entry** with time-controlled tripping, total current max. 40 A
- Integrated fail-safe element matched to the maximum rated current
- Very high efficiency
- No derating up to 60 °C ambient temperature
- Switching on of capacitive loads up to 40,000 µF at 12 A rated current
- ON/OFF/Reset button with multicolor LED status indicator
- Signal output (13, 14) with 1 NO contact for group signaling
- Reset input (RST) for remote resetting of tripped channels
- All connection terminals equipped with push-in terminals
- Several devices can be combined using power jumpers for supply and signal jumpers for 0 V, signal and reset
- **Entry** and **Advanced** devices can be combined using jumpers

Electronic protection devices

Characteristics	Function	Input	Channels	Rated current	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
					EAN	Type code	Order code		kg	pc.
Time-controlled tripping	Entry	24 V DC	4	1–10 A	053135	EPD24-E4 1-10	2CDE601102R0110		0.175	1
Active current limiting	Advanced	24 V DC	4	0.5–12 A	053159	EPD24-A4 0.5-12	2CDE601102R0512		0.182	1

Accessories

Characteristics	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
1 power jumper for 24 V DC and 3 signal jumpers for 0 V, signal and reset	**098129**	EPD24 jumpers (1 sets)	2CDE605300R0010			1/4
5 power jumpers for 24 V DC and 15 signal jumpers for 0 V, signal and reset	**098143**	EPD24 jumpers (5 sets)	2CDE605300R0050			5/20
25 power jumpers for 24 V DC and 75 signal jumpers for 0 V, signal and reset	**098167**	EPD24 jumpers (25 sets)	2CDE605300R0250			25/100

Protection and safety

Electronic protection devices | 4 channel

Data for rated values T_a = 23 °C, U_{in} = 24 V DC, unless otherwise specified.

		Entry EPD24-E4 1-10	Advanced EPD24-A4 0.5-12
Input data			
Rated voltage U_{in}		24 V DC	
Operating voltage		18 .. 30 V DC	18 .. 32 V DC
Total rated current I_n		Max. 40 A	Max. 48 A
Suitable for battery-buffered applications		No	On request
Rated insulation voltage U_i		30 V DC (load circuit)	32 V DC (load circuit)
Standby current I_0		Typ. 33 mA	Typ. 17 mA
Reverse power supply		Max. 30 V DC	Max. 32 V DC
Reverse polarity protection		Yes, not including load	
Output data			
Output		Power MOSFET switching output (positive switching) without galvanic isolation	
Trip characteristic		Time-controlled tripping	Active current limiting
Fuse type		Electronic	
Overload tripping I_{OL} with trip time t_{OL}		See page <?>, trip characteristic curve, Entry EPD24-E4 1-10 for time-controlled tripping Typ. I_{OL} at >1.05 x I_n, typ. t_{OL} = 3 s Typ. I_{OL} at >1.35 x I_n, typ. t_{OL} = 0.5 s Typ. I_{OL} at >2.00 x I_n, typ. t_{OL} = 0.1 s Typ. I_{OL} at >2.5 x I_n, typ. t_{OL} = 0.012 s Typ. I_{OL} at >3.0 x I_n, typ. t_{OL} = 0.002 s	See page <?>, trip characteristic curve, Advanced EPD24-A4 0.5-12 with active current limiting Typ. I_{OL} at 1.2 x I_n, typ. t_{OL} = 3 s
Short circuit tripping I_{SC} with trip time t_{SC}		See page <?>, trip characteristic curve, Entry EPD24-E4 1-10 for time-controlled tripping Typ. I_{SC} at >3.0 x I_n, typ. t_{SC} = 0.002 s	See page <?>, trip characteristic curve, Advanced EPD24-A4 0.5-12 with active current limiting Typ. t_{SC} = 0.01...1 s applies to: I_n = 0.5 A: typ. I_{SC} at 8 x I_n I_n = 1 A: typ. I_{SC} at 4 x I_n I_n = 2 A: typ. I_{SC} at 2 x I_n I_n = 3...5 A: typ. I_{SC} at 1.6 x I_n I_n = 6...12 A: typ. I_{SC} at 1.4 x I_n
Output voltage U_{out}		$U_{out} = U_{in} – (I_a * 12$ mV/A) (typ. approx. 12 mV per 1 A)	$U_{out} = U_{in} – (I_a * 14$ mV/A) (typ. approx. 14 mV per 1 A)
Number of outputs		4 channels	
Rated current setting per channel output I_a		1 / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10 A	0.5 / 1 / 2 / 3 / 4 / 5 / 6 / 8 / 10 / 12 A
Rated current factory setting per channel output		10 A	12 A
Load current warning limit		Typ. 80 % I_n Warning limit hysteresis typ. 5 % (referred to I_n)	
If mounted individually: output current up to 60 °C per output (rated value)		10 A	12 A
	Derating 60 °C ... 70 °C	2 %/K per channel output	2.5 %/K per channel output
Parallel connection of outputs		Not permissible	
Freewheeling circuit		External freewheeling circuit for inductive load (design to suit load)	
Undervoltage tripping		OFF at typ. U_{in} < 16 V DC ON at typ. U_{in} > 19 V DC Hysteresis typ. 2 V	
Delay for switching on	Cascaded switching on of all outputs after power on with 24 V DC	Channel 1: typ. 100 ms Channel 2: typ. 200 ms Channel 3: typ. 300 ms Channel 4: typ. 400 ms	
	Cascaded switching on of all outputs after switching on the outputs remotely or after undervoltage	Channel 1: typ. 5 ms Channel 2: typ. 100 ms Channel 3: typ. 200 ms Channel 4: typ. 300 ms	
Fuse protection required		Not necessary, integrated fail-safe element	
Rated current, fail-safe element (per output channel)		16 A	25 A
Status indicator		LED (green, orange, red)	
Efficiency		99.4 %	99.3 %
Power loss		5.6 W at max. 40 A	8.5 W at max. 48 A
Capacitive load		Up to 20,000 µF (depending on the power supply unit and the current setting)	Up to 40,000 µF (depending on the power supply unit and the current setting)

Protection and safety

Electronic protection devices | 4 channel

	Entry EPD24-E4 1-10	Advanced EPD24-A4 0.5-12
Signal inputs and outputs		
SIGNAL OUTPUT 13-14		
Description	Group signal output 13-14	
Contact arrangement	Potential-free signal output, NO contact (optocoupler)	
Operating voltage	10 … 30 V DC	
Operational current	1 … 200 mA	
RESET RST		
Input voltage	8 … 32 V DC (reset with rising edge)	
Current consumption	Typ. 2.8 mA (at 24 V DC)	
Pulse length	≥ 100 ms (high signal) ≥ 100 ms (low signal)	
Voltage	> 8 V DC (high signal) ≤ 3 V DC (low signal)	
Connection data		
INPUT Input 24 V DC		
Connection type	Push-in terminal	
Stripping length	18 mm	
Tool	Slotted screwdriver with a blade width of 3.5 mm	
Conductor cross-section, rigid	0.5 mm² … 16 mm² AWG 20…10	
Conductor cross-section, flexible	0.5 mm² … 16 mm² AWG 20…8	
Conductor cross-section, flexible with ferrule with plastic sleeve	0.5 mm² … 10 mm²	
INPUT 0 V		
Connection type	Push-in terminal	
Stripping length	8 mm	
Tool	Slotted screwdriver with a blade width of 2.5 mm	
Conductor cross-section, rigid	0.2 mm² … 1.5 mm² AWG 24…16	
Conductor cross-section, flexible	0.2 mm² … 1.5 mm² AWG 24…16	
Conductor cross-section, flexible with ferrule with plastic sleeve	0.2 mm² … 0.75 mm²	
OUTPUT 1-4		
Connection type	Push-in terminal	
Stripping length	10…12 mm	
Tool	Slotted screwdriver with a blade width of 3.5 mm	
Conductor cross-section, rigid	0.2 mm² … 6 mm² AWG 24…10	
Conductor cross-section, flexible	0.2 mm² … 6 mm² AWG 24…10	
Conductor cross-section, flexible with ferrule with plastic sleeve	0.25 mm² … 2.5 mm²	
SIGNAL OUTPUT 13-14		
Connection type	Push-in terminal	
Stripping length	8 mm	
Tool	Slotted screwdriver with a blade width of 2.5 mm	
Conductor cross-section, rigid	0.2 mm² … 1.5 mm² AWG 24…16	
Conductor cross-section, flexible	0.2 mm² … 1.5 mm² AWG 24…16	
Conductor cross-section, flexible with ferrule with plastic sleeve	0.2 mm² … 0.75 mm²	
RESET RST		
Connection type	Push-in terminal	
Stripping length	8 mm	
Conductor cross-section, rigid	0.2 mm² … 1.5 mm² AWG 24…16	
Tool	Slotted screwdriver with a blade width of 2.5 mm	
Conductor cross-section, flexible	0.2 mm² … 1.5 mm² AWG 24…16	
Conductor cross-section, flexible with ferrule with plastic sleeve	0.2 mm² … 0.75 mm²	

Protection and safety

Electronic protection devices | 4 channel

	Entry EPD24-E4 1-10	Advanced EPD24-A4 0.5-12
General data		
Ambient temperature (operation)	-25 °C … +70 °C ; -25 °C … +65 °C according to UL 2367	
Storage temperature	−40 °C … +70 °C	
Mounting temperature	+5°C … +60°C	
Mounting type	Mounting rail according to EN 60715-35x7.5	
Mounting position	Vertical	
Minimum distance to neighboring devices	Horizontal 30 mm Vertical 50 mm	
Humidity	96 h, 95 % RH, 40 °C	
Altitude	At 4,000 m up to 60 °C ambient temperature (operation)	
Degree of protection	IP20	
Flammability according to UL94	V-2	
Color	Dark grey: RAL7012	
Protection class	III	
Pollution degree	2	
Vibration resistance according to IEC/EN 60068-2-6	Test Fc: 2 g, 20 frequency cycles at 10 … 500 … 10 Hz	
Shock resistance according to IEC/EN 60068-2-27	15 G, 11 ms, 3 axes, 6 sides, 3x each side	
MTTF	25 °C: 2 068 776 h 40 °C: 1 244 772 h	25 °C: 999 324 h 40 °C: 604 854 h
Standards / electromagnetic compatibility		
Conformity	CE, RoHS, REACH, UKCA	
UL approval	UL 2367 recognized; E339236 UL 508 listed; E321314	
CSA approval	CSA C22.2 No. 14; E321314	
Maritime approval	Pending	
EMC requirements	Interference emissions: EN 61000-6-3 Interference immunity: EN 61000-6-2	
Dimensions		
Height	130 mm (133 mm incl. latching lever)	
Width	25 mm	
Depth	108 mm	
Weight	Approx. 175 g	Approx. 182 g
Power jumper for 24 V DC		
Number of contacts	2	
Pitch	15 mm	
Disassembly tools	Slotted screwdriver with a blade width of 5.5 mm, and flat-nose pliers	
Signal jumpers for 0 V, signal and reset		
Number of contacts	2	
Pitch	14 mm	
Disassembly tools	Slotted screwdriver with a blade width of 2.5 mm	

Protection and safety

Electronic protection devices | 1 channel

EPD24-TB-101

The protection devices EPD24 extend the ABB product range of modular DIN rail components by electronic overcurrent protection modules for selective protection of 24V DC load circuits.
This protection is achieved by a combination of active electronic current limitation in the case of a short circuit and an overload deactivation from 1.1 x In upwards.
If a fault occurs in a load circuit, the protection device EPD24 will detect this rapidly and reliably, disable the power output transistor and hence interrupt the current flow in the defective circuit. The maximum possible overcurrent is always limited to 1.5...1.8 times the selected rated current. An activation of capacitive loads up to 20.000 µF is possible, deactivation only occurring in the case of overloads or short circuits. Selective deactivation of the defective current circuit means undefined error states and a complete system stop are prevented.

Characteristics

- Selective load protection, one electronic trip characteristics.
- Active current limitation for safe connection of capacitive loads up to 20.000 µF and on overload/short circuit.
- Current ratings 0.5 A...12 A.
- Reliable overload disconnection with 1.1 x IN
- Manual ON/OFF button
- Clear status and failure indication through LED and auxiliary contact.
- Integral fail-safe element adjusted to current rating.
- Width per unit only 12.5 mm.
- Rail mounting
- Ease of wiring through busbar LINE+ and 0 V as well as signal bars.
- UL- and CSA-approvals allow international use of the devices.

Rated current In	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
A	EAN	Type code	Order code		kg	pc.
0.5	829960	EPD24-TB-101-0.5A	2CDE601101R2905		0.065	4
1	829984	EPD24-TB-101-1A	2CDE601101R2001		0.065	4
2	830003	EPD24-TB-101-2A	2CDE601101R2002		0.065	4
3	830027	EPD24-TB-101-3A	2CDE601101R2003		0.065	4
4	830041	EPD24-TB-101-4A	2CDE601101R2004		0.065	4
6	830065	EPD24-TB-101-6A	2CDE601101R2006		0.065	4
8	830089	EPD24-TB-101-8A	2CDE601101R2008		0.065	4
10	830102	EPD24-TB-101-10A	2CDE601101R2010		0.065	4
12	830126	EPD24-TB-101-12A	2CDE601101R2012		0.065	4

Accessories

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Busbars for LINE+ and 0 V, grey insulation, length 500 mm [1]	830140	EPD-BB500	2CDE605100R0500		0.20	10
Signal Bars for aux. contacts, grey insulation, length 21 mm	830164	EPD-SB21	2CDE605200R0021		0.04	10

1) Max. load with one line entry Imax = 50 A (recommended: center-feeding)
Max. load with two line entries Imax = 63 A

Protection and safety

Electronic protection devices | 1 channel

EPD24-TB-101

Operating data

Operating voltage UB	24 V DC (18...32 V)		
Current rating IN	fixed current ratings: 0.5, 1, 2, 3, 4, 6, 8, 10, 12 A		
Closed current I0	ON condition: typically 20...30 mA depending on signal output		
Staus indication by means of	multico-lour LED	Green	- unit is ON (S1 = ON)
			- load circuit/Power-is switched on MOSFET
		Orange	- in the event of overload or short circuit until electronic disconnection
		Red	- unit electronically disconnected
			- load circuit/Power-MOSFET OFF
			- undervoltage (UB < 8 V)
			- after switch-on till the end of the delay period
		OFF	- manually switched off (S1 = OFF) or device is dead
	potential-free auxiliary contact F		
	ON/OFF/condition of switch S1		

Load circuit

Load output	Power-MOSFET switching output (high slide switch)
Overload disconnection	typically 1.1 x IN (1.05...1.35 x IN)
Short-circuit current IK	active current limitation (see table 1)
Trip time	see time/current characteristics
For electronic disconnection	typically 3 s at ILoad > 1.1 x IN typically 100 ms...3 s at ILoad > 1.8 x IN (or 1.5 x IN/1.3 x IN,)
Temperature disconnection	internal temperature monitoring with electronic disconnection
Low voltage monitoring load output	with hysteresis, no reset required: load »OFF« at UB< 8 V
Starting delay tStart	typically 0.5 sec after every switch-on and after applying US
Disconnection of load circuit	electronic disconnection
Free-wheeling circuit	suitable external free-wheeling circuit to be used with inductive load
Several load outputs must not be connected in parallel	

Signal output F

Electrical data	potential-free auxiliary contact max. 30 V DC/0.5 A, min. 10 V DC/10 mA
ON condition LED green	voltage UB applied, switch S1 is in ON position no overload, no short circuit
OFF condition LED off	device switched off (switch S1 is in OFF position)
	no voltage UB applied
Fault condition LED orange	overload condition > 1.1 x IN up to electronic disconnection
Aux. contact	single signal, make contact
	contact open, terminal 13-14
Fault	signal output fault conditions
	- no operating voltage UB
	- ON/OFF switch S1 is in OFF position
	- red LED lighted (electronic discon nection)

Protection and safety

Electronic protection devices | 1 channel

EPD24-TB-101

General data

Fail-Safe element	backup fuse for EPD24 not required
	because of the integral redundant fail-safe element
Housing material	moulded
Mounting	symmetrical rail to EN 50022-35x7.5
Ambient temperature	-25...+60°C (without condensation, see EN 60204-1; ambient temperature range may differ for approvals)
Storage temperature	-40...+70 °C
Humidity	96 hrs/95 % RH/40 °C to IEC 60068-2-78, test Cab. climate class 3K3 to EN 60721
Vibration	3 g, test to IEC 60068-2-6 test Fc
Protection degree	housing: IP20 DIN 40050
	terminals: IP20 DIN 40050
EMC (EMC directive, CE logo)	emission: EN 61000-6-3
	susceptibility: EN 61000-6-2
Isolations coordination (IEC 60934)	0.5 kV/pollution degree 2 reinforced insulation in operating area
Dielectric strength	max. 32 V DC (load circuit)
Isolation resistance (OFF condition)	n/a, only electronic disconnection
Approvals/Declarations of conformity	UL 2367 Solid State Overcurrent Protectors
	UL 1604, (class I, division 2, groups A, B, C, D)
	UL 508
	CSA C22.2 No. 213 (class I, division 2)
	CSA C22.2 No. 142
	CSA C22.2 No. 14
	CE logo
Dimensions (B x H x T)	12.5 x 80 x 83 mm
Weight	approx. 65 g

Terminals Line+/LOAD+/0V

Screw terminals	M4
Max. cable cross section flexible with wire end ferrule w/wo plastic sleeve	0.5 – 10 mm^2
Multi-lead connection (2 identical cables) rigid/flexible	0.5 – 4 mm^2
Flexible with wire end ferrule without plastic sleeve	0.5 – 2.5 mm^2
Flexible with TWIN wire end ferrule with plastic sleeve	0.5 – 6 mm^2
Wire stripping length	10 mm
Tightening torque (EN 60934)	1.5 – 1.8 Nm

Terminals aux. contacts

Screw terminals	M3
Max. cable cross section flexible with wire end ferrule w/wo plastic sleeve	0.25 - 2.5 mm^2
Wire stripping length	8 mm
Tightening torque (EN 60934)	0.5 Nm

Protection and safety

SQZ3 phase and sequence relay

SQZ3

Technical features

Supply voltage	[Vn]	400 V AC
Frequency	[Hz]	50/60
Contact type	[A]	1 CO, 250 V, 10 A (cosφ=1) safety switching
Minimum voltage adjustment trimmer	[%]	100 to 70 % of Vn
Intervention delay adjustment trimmer	[s]	2 to 20 (only for min. voltage)
Protection degree	[IP]	20
Operating temperature	[°C]	-10...+55
Power consumption	[W]	1.5
Modules	[n°]	3

SQZ3 phase and sequence relay

SQZ3 relay performs the following continue monitoring functions on three-phase networks at 400 V AC:

- phase sequence
- phase failure
- minimum voltage (adjustable up to 70 % of Vn).

If one of the three failures is detected, the output relay (safety switching contact) intervenes with a delay adjustable from 2 to 20 seconds for minimum voltage only and controls the following:

- acoustic alarms
- motor controlling contactors
- circuit-breakers with coils.

	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	372004	SQZ3	2CSM111310R1331		0.300	1

Protection and safety

E 236 undervoltage monitoring relays

E 236-US 1

E 236-US 2

Technical features

		US 1 US 2
Rated voltage		250 V AC
Rated frequency		48-63 Hz
Measuring range:	supply voltage	3N 400/230 V AC (terminals N-L1-L2-L3)
	overload capacity	3N 459/265 V AC
Switching capacity		device in series (distance < 5 mm): 750 VA (3 A/250 V AC);
		device not in series (distance > 5 mm): 1250 VA (5 A/250 V AC)
Rated insulation voltage		250 V AC (corresponds with IEC 60664-1)
Rated impulse withstand voltage		4 kV
Tripping delay		ca. 100 ms
Clearence and creepage distance		> 6mm (between contact and electronics)
Mechanical service life		20 x 106 operations
Electrical service life at 10000 VA		2 x 105 operations
Max. switching rate		max. 6/min (1000 VA Ohmic load);
		max. 60/min (100 VA Ohmic load)
Ambient temperature		-25 °C/-13 °F to +55 °C/131 °F
Overvoltage category		III
Accuracy in non-changing environment:	setting tolerance (US 2)	≤ 5 %
	repeat accuracy	±1 %
	temperature effect	≤ 0.1 %/°C
Max terminals cross-section		4 mm^2
Specifications		VDE 0110 and VDE 0435
EMC tests		EN 50081-1 and EN 50082-2
Displays		LED green= supply voltage applied; LED yellow= relay status
Power loss		1.7 W

E 236 undervoltage monitoring relays

Function

The green LED is lit when the supply voltage is applied. If each phase voltage exceeds 195 V (US1) or exceeds the preset threshold value (US2) with respect to the neutral including the hysteresis when switching the device on, the relay switches immediately into the working position. The yellow LED is lit. If at least one phase voltage falls below the threshold value, the relay goes back into its normal position and the yellow LED goes out.
If also phase 2 fails, the green LED goes out, too.
It is indispensable to connect the neutral conductor!

Application - devices with 2CO contacts

For the control of three-phase undervoltage (each phase to neutral) of switchgear, also for installations according to DIN VDE 0100-718 (power installations in hospitals and rooms used for medical purposes outside of hospitals) and DIN VDE 0108-100 (power installations and safety supply in buildings where many people gather).
US 1: 3 phases to neutral with fixed threshold at 195 V; hysteresis fixed 5 %
US 2: 3 phases to neutral with fixed threshold at 160 – 240 V; hysteresis fixed 5 %

Contact	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
2CO	511087	E 236-US 1	2CDE165000R2001		0.095	5
2CO	511094	E 236-US 2	2CDE165010R2001		0.095	5

Protection and safety

E 236 undervoltage monitoring relays

E 236

Technical features

		US 1.1 US 2.1 US 1.1D
Supply circuit		
Supply voltage (= measured voltage)		3N~ 400/230 V AC (terminals N-C1-C2-C3)
Overvoltage permanent		3N~ 459/265 V AC
Rated frequency		48 – 63 Hz (AC sinus)
Rated surge voltage:		4 kV
Overvoltage category		III
Output circuit (isolated two-way-switch)		
Rated voltage		250 V AC
Switiching capacity		1250 VA (5 A/250 V AC)
Continuous current		1250 VA (5 A/250 V AC)
Fuse protection		5 A flink
Serviceable life, mechanical		15x106 switchover cycles
Serviceable life, electric		2x105 switchover cycles at 1.000 VA resistive load
Max. switching rate		max. 6/min at 1.000 VA resistive load
		max. 60/min at 100 VA resistive load
Trip delay		ca. 200 ms
Pick-up delay (US 1.1D)		0.1 – 10 min
Accuracy under constant conditions – setting accuracy (US 2.1/1.1D) – repeat accuracy – temperature effect		≤ 5 % of full scale value ≤ 2 % ≤ 1 %
Ambient temperature		– 25° to + 55 °C
Terminals		1 x 0.5 to 2.5 mm² with/without connector sleeve
		1 x 4 mm² without connector sleeve
		2 x 0.5 to 1.5 mm² with/without connector sleeve
		2 x 2.5 mm² without connector sleeve
Pick-up torque		max. 1 Nm
Mounting position		optional
Vibration resistance		10 to 55 Hz 0.35 mm (IEC 68-2-6)
Shock resistance		15 g 11 ms (IEC 68-2-27)
Reference standards		VDE 0110 und VDE 0435
EMC tests		EN 61000-6-2 and EN 61000-6-4
Back-up fuse		≤ 16 A
Displays	green LED U/t ON	all 3 voltages ok
	green LED U/t flashes	time-out indication
	yellow LED ON/OFF	position of output relay

All measured inputs have to be connected to one phase each. If no three-phase measurement should be carried out, measured inputs have to be connected to one phase to apply the required voltage to all measured inputs. If a load causes inverse voltage exceeding the threshold value Us, phase failures cannot be identified.
A neutral conductor must be connected in any case!

Protection and safety

E 236 undervoltage monitoring relays

E236-US1.1

E236-US2.1

E236-US1.1D

Devices for panel installation onto mounting rails (35 mm) according to DIN EN 60715
mounting depth: 68 mm
mounting width: 17.5 mm = 1 module
color: gray, RAL 7035

Application - devices with 1CO contact
For three-phase undervoltage monitoring (each phase connected to a neutral conductor) of switchgear. Devices with fixed threshold value (US 1.x and US 1.1 D) also for installations according to
DIN VDE 0100-718 (for medical purposes) and DIN VDE 0108-100 (power installations and safety supply in installations for gathering of people).

US 1.1: 3 phases to neutral conductor with fixed threshold value at 195 V; hysteresis fixed at 5 %

US 2.1: 3 phases to neutral conductor with threshold value range of 160 – 240 V; hysteresis fixed at 5 %

US 1.1D: 3 phases to neutral conductor with fixed threshold value at 195 V; hysteresis fixed at 5 %, but with switch-on delay of 0.1 (6 sec.) to 10 min

Undervoltage monitoring device with pick-up delay E236-US 1.1D
If the measurement of the voltage of all phases connected exceeds the switching threshold U_s, including the hysteresis, the time delay (t) starts to run and the (green LED U/t) flashes. Upon expiry of the time delay (t), the output relay R picks up (yellow LED on, green LED U/t flashes). If the measured voltage of one of the connected phases falls below the switching threshold U_s, the output relay de-energizes (yellow LED is off, green LED U/t is off).

Contact	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
1 two-way switch	651776	E 236-US 1.1	2CDE165001R2001		0.05	10
1 two-way switch	651783	E 236-US 2.1	2CDE165011R2001		0.05	10
1 two-way switch	651790	E 236-US 1.1D	2CDE165001R2011		0.05	10

Protection and safety

ISL industrial insulation monitoring devices

ISL

Technical features ISL-A

			ISL-A		
			A 24-48	**A 115 and A 230**	**A 600**
Power consumption		[VA]	3	4	6
ALARM threshold		[kΩ]		30 - 30 (5 levels, selectable)	
TRIP threshold		[kΩ]	10 - 60 (5 levels by switches)	10 - 100 (5 levels selectable)	30 - 300 (adjustable by potentiometer)
LED indications	ON		■	■	■
	TRIP		■	■	■
	ALARM			■	
	+/-		■	■	■
Max trip delay		[s]	0.2	2	2.5
Max measuring current		[mA]	0.5	1.8	1.5
Internal impedance		[kΩ]	50	ISL-A 115: 200 kΩ L+/L- 100 kΩ L/PE ISL-A 230: 400 kΩ L+/L- 200 kΩ L/PE	880 kΩ L+/L - 450 kΩ L/PE
TRIP relay output			1 NO-C-NC	2 NO-C-NC	1 NO-C-NC
Alarm relay output				2 NO-C-NC	
Relay contact capacity			max 250 V, 5 A		
Programmed functions	Alarm output			■	
	Fail safe			■	■
	Reset		■		
Insulation			2.5 kV60 sec./ 6 kV imp 1.2/50 µs	2.5 kV 60 sec./ 4 kV imp 1.2/50 µs	2.5 kV 60 sec./ 6 kV imp 1.2/50 µs
Operating temperature		[°C]	-10 ÷ 60		
Storage temperature		[°C]	-20 ÷ 70		
Relative humidity			≤ 90%		
Max terminal cross-section		[mm^2]	4	2.5	2.5
Protection degree			IP40 front, IP20 enclosure		
Modules		[n°]	3	6	6
Weight		[g]	200	400	400
Reference standards			EN 61010-1, EN 61557-8, EN 61326-1		

Protection and safety

ISL industrial insulation monitoring devices

ISL-A

Technical features ISL-C and ISL-MOT

			ISL-C			ISL-MOT
			C 230	**C 440**	**C 600**	**MOT 1000**
Auxiliary power supply		[V]	220-240 V AC	220-240 V AC	100÷130 V AC/ 220÷240 V AC	220- 240 V AC
Power consumption		[VA]	3	3	5	3
TRIP threshold		[kΩ]	100	10 -150 (5 levels)	10-100 (5 levels)	0.1-10 (8 levels)
Alarm Threshold		[kΩ]	-	-	30-300 (5 levels)	-
LED indications	ON		■	■	■	■
	TRIP		■	■	■	■
	ALARM				■	
Max trip delay		[s]	1	4	5	0.2
Max measuring current		[mA]	0.1	0.1	0.25	0.0015
Max measuring voltage		[V]	12 V DC	12 V DC	48	20
Internal impedance		[kΩ]	250	250	200	AC: 1000 DC: 1500
TRIP relay output			1 NO-C-NC	1 NO-C-NC	2 NO-C-NC	1 NO-C-NC
Relay contact capacity			max 250 V, 5 A			
Insulation			2.5 kV60 sec./4 kV imp 1.2/50 µs			
Operating temperature		[°C]	-10 ÷ 60			
Storage temperature		[°C]	-20 ÷ 70			
Relative humidity			≤ 95%			
Max terminal cross-section		[mm²]	4	4	2.5	4
Protection degree			IP40 front, IP20 enclosure			
Modules		[n°]	3	3	6	3
Weight		[g]	200	200	500	200
Reference standards			EN 61010-1, EN 61557-8, EN 61326-1			

Insulation monitoring devices for voltageless network

Monitored line voltage	**Bbn 8012542**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
20-700 V AC/DC	943204	ISL-MOT 1000	2CSM808000R1500		0.300	1

Protection and safety

ISL industrial insulation monitoring devices

ISL-A

ISL-C

Insulation monitoring devices

In IT electrical distribution networks with isolated neutral, the high insulation impedance prevents earth faults from generating currents that would dangerously elevate the potential of exposed conductive parts. Therefore, in case of earth leakage in an IT network it is not necessary to interrupt the supply, but it is still essential to continually monitor the insulation level in order to detect faults and restore optimal functioning of the system.
In industrial installations, IT networks are used when operational continuity is an intrinsic requirement of the production process, due to both technical and economic considerations. Such applications include: metalworking and chemical industries, explosion risk locations, railway lines and vehicles, uninterruptible power supplies, cinema sets, emergency lines, fire water pumps and emergency lighting.

Insulation monitoring devices for AC networks

Max. monitored line voltage	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
220-240 V AC	942801	ISL-C 230	2CSM444000R1500		0.300	1
380-415 V AC	942900	ISL-C 440	2CSM545000R1500		0.300	1
60-760 V AC	943006	ISL-C 600	2CSM656000R1500		0.500	1

Insulation monitoring devices for DC networks

Max. monitored line voltage	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
100-144 V DC	942603	ISL-A 115	2CSM222000R1500		0.500	1
220 V DC	942702	ISL-A 230	2CSM333000R1500		0.500	1
400-600 V DC	498537	ISL-A 600	2CSM249853R1500		0.500	1

Insulation monitoring devices for AC/DC networks

Monitored line voltage	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
24-28 V AC/DC	942504	ISL-A 24-48	2CSM111000R1500		0.300	1

Protection and safety

H+Line products

Specifically designed for medical use according to the IEC EN 61558-2-15, it ensures protection against indirect contacts without the need to interrupt the circuit automatically upon the first grounding fault.
Thanks to its two PT100 temperature probes, on primary and secondary winding, it is possible to monitor the transformer over temperature produced by any eventual overload, and therefore anticipating any breakdown.
The transformer is mounted on the base of the switchboard in order to ease handling and installation operations.

This is an insulation monitoring device for group 2 medical locations fully compliant with the IEC 60364-7-710 reference standard. It integrates all the performances established by the reference standard, such as overload and overcurrent monitoring, together with traditional IT system earthing insulation measurement.

Protection and safety
H+Line products

Solutions for the hospital sector
ABB's extensive experience in the hospital field is certified by several installations in leading hospitals, which represent the current leading-edge in safety and technology. Over the years, ABB has developed an increasingly more complete product with higher performance to meet the needs of more demanding customers and guarantee patient and operator safety.
H+Line products are specifically designed for group 2 medical environments in full compliance with Standard IEC 60364-7-710, specifically:
- Intensive therapy wards, operating theatres, cardio surgical rooms, ICU…
- Day hospitals, clinics, rest homes, dental and veterinary clinics, etc.

H like Hospital

+ like health and first aid

+ like the countless advantages of ABB products

Protection and safety
H+Line products

H+Line product range

ISOLTESTER		Insulation monitoring device for IT-M 230 V circuits
SELVTESTER		Insulation monitoring device for SELV 24 V circuits which supply scialitic lamps.
QSD		Remote signalling panel for visual and acoustic fault indication.
TI		Medical insulating transformers for insulated protection systems.

Valid assistance for consultants
Everyone knows what the regulations say. ABB tells you what they don't say. The "Practical guide to group 2 medical locations" is designed to be a useful daily tool for consultants and installers to help them in each group 2 hospital electrical system designing and installation. The document was developed toghether with ABB customers with the intent to support key regulatory questions with practical solutions, considerations and reccomendations on system design. This way, the "Practical guide to group 2 medical locations" is a valid tool, with plenty of of examples, to support consultants in their daily job.

Protection and safety

ISOLTESTER-DIG insulation monitoring devices

ISOLTESTER-DIG

Technical features

	ISOLTESTER-DIG-RZ	ISOLTESTER-DIG-PLUS/RS
Aux supply	115 - 230 V 50-60Hz	
Power consumption	5 VA max	6 VA max
Rated voltage	24 ÷ 230 V 50-60 Hz	24 ÷ 250 V AC/DC
Measurament current	1 mA max	
Measurement voltage	24 V max	
Control signal	Continuous with digital filter	Composite codified (PLUS only)
Internal impedance	200 kΩ	
Insulation measurement	0 ÷ 999 kΩ	
	resolution 1 kΩ	
	accuracy 5% ± 1 digit	
Impedance measurement	0 ÷ 999 kΩ	
	resolution 1 kΩ	
Temperature measurement	PT100 with 2 or 3 wires, PTC	
	0 ÷ 200 °C,	
	resolution 1 °C,	
	accuracy 2 % ± 1 digit	
Current measurement	CT .../5 A external	
	accuracy 5% ± 1 digit, (adjustable transformation rate 1÷40)	
Capacity measurement	no	0 ÷ 9.9 µF (PLUS only)
		resolution 0.1 µF (PLUS only)
Thresholds	Resistance: 50 ÷ 500 kΩ	
	Impedance: 50 ÷ 500 kΩ	
	Thermal overload: 30 ÷200 °C with PT100	
	Electrical overload: 1 ÷ 99.9 A	
Signals	incorrect wiring (link fail)	
	open/short circuit for temp sensor PT100	
	internal error	
Output	QSD supply (max 2 QSD), max 24 V DC	QSD supply (max 4 QSD), max 24 V DC
	Signals to QSD	
	aux relay for low resistance, NO-C-NC 5A 250 V AC	programmable aux relay, NO-C-NC 5A 250 V AC
	-	Serial output RS485, ModbusRTU protocol
Modules	6	
Weight	0.4 kg	0.5 kg
Mechanical features	fire resistant plastic case	
	sealable transparent front cover	
Terminals	screw terminals 2.5 mm^2	
Protection degree	IP20, IP50 when the cover is closed	
Operating temperature	-10 ÷ 60 °C	
Storage temperature	-25 ÷ 70 °C	
Relative humidity	≤ 95 %	
Insulation	2.5 kV 60 sec.	
Reference standards	CEI-EN 61010-1	
	CEI-EN 61557-8	
	IEC 60364-7-710	
	UNE 20615	
	CEI-EN 61326-1	

Protection and safety

ISOLTESTER-DIG insulation monitoring devices

ISOLTESTER-DIG

Assuring operational continuity in medical environments, even in presence of first earthing fault, it's mandatory in operating theatre group 2 medical locations.
For this reason an IT distribution system with insulating transformer is used to supply medical equipment.

ISOLTESTER-DIG
ISOLTESTER range of insulation monitoring device allows IT-M network monitoring, assuring safety for patients and medical personnel avoiding supply interruption in case of first earthing fault according to IEC 60364-7-710 Standard.

The ISOLTESTER-DIG range assures safety to patients and medical personnel, signalling when a fault to earth occurs. Thanks to its innovative technology it is used to sense the insulation level of the network by far more efficiently compared to traditional insulation monitoring devices.

Advanced features	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	884507	ISOLTESTER-DIG-RZ	2CSM244000R1501		0.500	1
RS485, Max-Min values, Programmable relay	568339	ISOLTESTER-DIG-RS	2CSM256833R1521		0.500	1
RS485, Max-Min values, Programmable relay, Noise immunization (with codified signal)	884606	ISOLTESTER-DIG-PLUS	2CSM341000R1501		0.500	1

Protection and safety

SELVTESTER insulation monitoring devices for insulated networks at 24 V AC/DC

SELVTESTER

Technical features

Network voltage and auxiliary power supply	24 V 50-60 Hz/DC ± 20 %
Max power dissipation	3 VA – 3 W
Measurement current	max. 0.5 mA
Internal impedance	50 kohm
Threshold	programmable to 10 ÷ 50 kohm (4 levels using microswitches)
Activation delay	about 1 second
Signals	led ON, led ALARM +, led ALARM -
Output	for up to 2 QSD-230/24-C, max. 24 V 1 A remote panels
Operating temperature	-10 ÷ 60 °C
Storage temperature	-20 ÷ 70 °C
Relative humidity	≤ 95 %
Insulation	2.5 kV 60 sec./4 kV imp. 1.2/50µs
Terminal cross-section	4 mm^2
Protection degree	IP20, IP40 when the cover is closed
Modules	3
Weight	200 g
Reference standards	IEC 60364-7-710, EN 61326-1, EN 61010-1

SELVTESTER for insulated networks at 24 V AC/DC

It is used to monitor permanently the insulation of safety extremely low voltage circuits (up to 24 V) especially scialitic lamps.

Function	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Insulation monitoring	884705	SELVTESTER-24	2CSM211000R1511		0.250	1

Protection and safety

QSD remote signalling panel

QSD

Technical features

Signals	Green LED network ON Red LED overload ALARM Yellow LED insulation ALARM intermittence 2 Hz dB ALARM, acoustic signaller, emission 2400 Hz
Buttons	TEST and MUTE buttons
Terminal cross-section	2.5 mm^2
Protection degree	IP30
Installation type	universal flush mounted box
Weight	200 g
Operating temperature	-10 ÷ 60 °C
Storage temperature	-25 ÷ +80 °C
Relative humidity	≤ 95 %
Insulation	2500 Vrms 50 Hz 60 s
Cables cross-section	0.35 mm^2 for 300 m
Compatibility	ISOLTESTER-DIG-RZ, ISOLTESTER-DIG-RS, ISOLTESTER-DIG, PLUS, SELVTESTER-24
Reference standards	safety EN 61010-1 product EN 61557-8/IEC 60364-7-710/ UNE 20615 electromagnetic compatibility EN 61326-1

QSD remote signalling panel

They are installed in combination with insulation monitoring devices, to remotely report the signals generated by these devices. They can be installed together with ISOLTESTER-DIG and SELVTESTER-24 and they are compatible also with former versions of insulating monitoring devices. Flush mounting box is already included in the packaging.

Version	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Horizontal	730637	QSD-DIG 230/24	2CSM273063R1521		0.800	1
Vertical	570936	QSD-DIG 230/24 V	2CSM257093R1521		0.800	1

Protection and safety

TI switchboards and devices for medical locations

Technical characteristics

		TI 3-S	TI 5-S	TI7.5-S	TI 10-S	TI 3-S H	TI 5-S H	TI 7.5-S H	TI 8-S H	TI 10-S H
Number of Phases		1	1	1	1	1	1	1	1	1
Power	[kVA]	3	5	7.5	10	3	5	7.5	8	10
Rated frequency	[Hz]	50-60								
Power dissipation	[W]	120	150	260	320	160	220	330	340	350
Electrical protection class		1								
Insulation Class	[°C]	F155	F155	F155	F155	H180	H180	H180	H180	H180
Thermal Class	[°C]	B130	B130	F155	F155	B130	B130	B130	B130	B130
Operating temperature	[°C]	max 40	max 40	max 40	max 40	max 40	max 40	max 40	max 40	max 40
Primary winding voltage	[V]	230	230	230	230	230	230	230	230	230
Secondary winding voltage	[V]	230	230	230	230	230	230	230	230	230
No load current	[A]	< 0.39	< 0.65	< 0.98	< 1.3	< 0,39	< 0.22 A	< 0.32 A	< 0.35 A	< 0.43 A
Voltage drop		< 3%								
Inrush current	[A]	< 147	< 245	< 368	< 491	< 147	< 245	< 368	< 430	< 491
Power loss	[W]	120	150	260	320	160	220	330	340	350
Winding separation		double insulation								
Metallic shield		■								
Reference standard		IEC-EN 61558-1, IEC-EN 61558-2-15								
Dimensions	[mm]	205x340x150	240x380x150	240x380x170	280x200x450	200x150x330	240x160x380	240x170x380	240x180x380	280x200x450

Insulating transformers for medical locations

Permanently connected to an IT power supply system, single-phase medical insulating transformers provide galvanic separation between the distribution network and the user load in accordance with IEC EN 61558-2-15 concerning power supply group 2 medical locations.

Rated output	PT100	Bbn 801254	Order details		Price 1 piece	Weight 1 piece	Pack unit
kVA		EAN	Type code	Order code		kg	pc.
3	■	2521402	TI 3-S	2CSM210000R1541		29.5	1
5	■	2521501	TI 5-S	2CSM220000R1541		44.0	1
7.5	■	2521600	TI 7.5-S	2CSM230000R1541		50.5	1
10	■	2521709	TI 10-S	2CSM240000R1541		73.0	1
3	■	2627258	TI 3-S H	2CSM210001R1541		29.0	1
5	■	2627357	TI 5-S H	2CSM220001R1541		42.0	1
7.5	■	2627456	TI 7.5-S H	2CSM230001R1541		48.0	1
8	■	2627555	TI 8-S H	2CSM240001R1541		48.0	1
10	■	2627654	TI 10-S H	2CSM250001R1541		75.0	1

Notes

COMMAND AND SIGNALING

Electrical installation solutions for buildings
Command and signaling

Index

SD 200 switch disconnectors	6
SHD 200 switch disconnectors	10
E 200 switches	14
E 463/3 switches	16
E210 switches	17
ESB..N and EN..N installation contactors	27
E260 Electronic Latching relay	42
E290 Mechanical Latching relay	44
E297 Installation relay	52
Busch-Dimmer®	58
Transformers selection table	58
Control, isolating and safety transformers selection table	60
TM-C, TM-S, TM-I control, isolating and safety transformers	61
TS-C safety isolating transformers for general use	64
TM bell transformers	65
TS bell transformers	66
RI, BR, TSM, TSR bells and buzzers	67
SM, RM, TSM, TSR bells and buzzers	68
CP-D primary switch mode power supplies	69
Modular sockets selection table	70
Modular sockets	73
MA1-8001 DIN rail adapter	77

The details make the difference
Switch disconnector SD 200

Patented twin terminals with captive screws: highest comfort, safety and flexibility

Easy product coding – easy identification: basic technical information already integrated into the name

Fully compatible with all System pro M devices and accessories

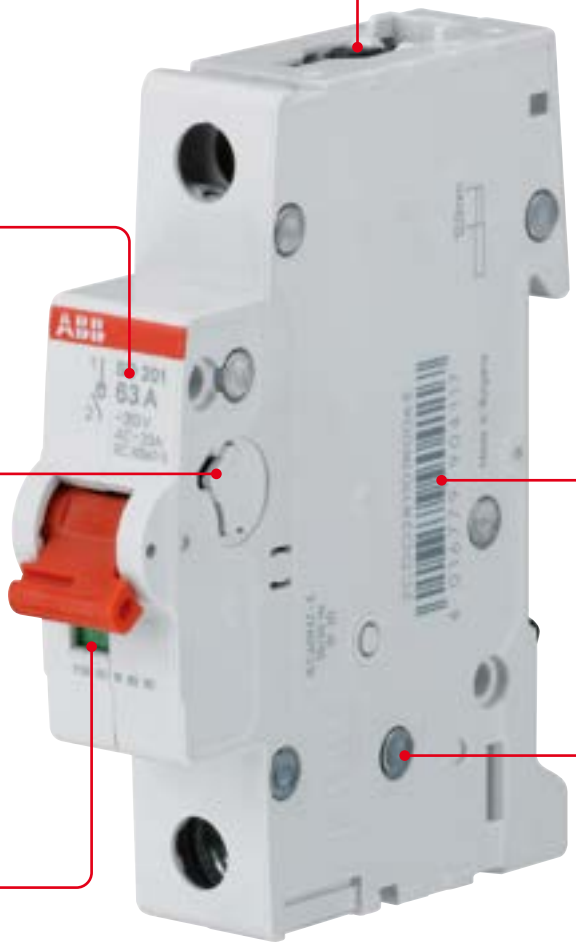

Laser printing: scratch and solvent resistant marking

Patented housing design: environmental friendly and performance-optimized

Real contact position indication, directly connected to the moving contact, for more comfort and safety

Contact position indication
The switch disconnector SD 200 is suited with a real contact position indication (real CPI). You can easily identify, if the SD 200 is in the ON or the OFF position – easy and safe maintenance work is possible.
The position of the toggle and the red/green display leaves no doubt about the present switching position, while the latter offers additional security, as the exact position of the inner contacts is always displayed.Thus, the device always supplies reliable information in the event of an error.

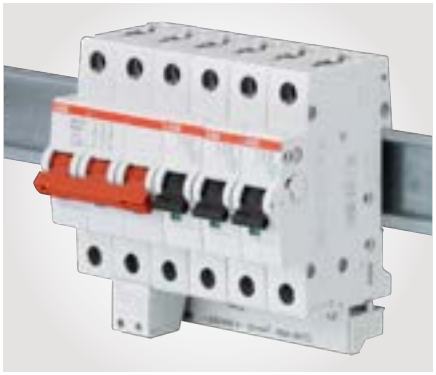

Wide range of accessories
SD 200 is fully compatible to the complete range of System pro M compact accessories like
- Auxiliary contacts, to be mounted on the left side, the right side or bottom fitting
- Shunt trips
- Undervoltage release
- Motor operating devices

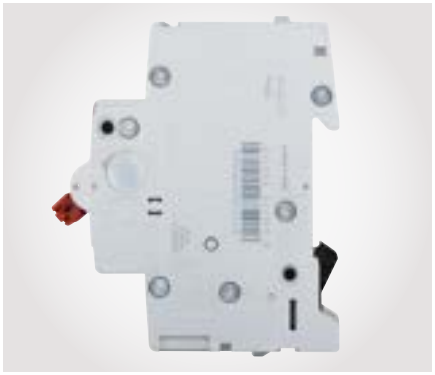

PATENTED – Housing Design
By using state-of-the-art housing material, ABB is taking care of the environment. With the latest generation of halogen free thermoplastics for SD 200 it's possible to recycle the switch disconectors completely without environmental pollution. The material works for the stability.

Laser printing
All labels on the SD 200, as the approvals on the dome, technical details and the product identification, are printed by a laser. The laser printing ensures a friction, scratch and solvent resistant marking on the switch disconectors for easy identification in case of maintenance or replacements. For control and acceptance procedure it is important to see all markings also in the mounted position.

Highest performance
With a rated voltage of 253/440 V AC, a rated conditional short-circuit current of 25 kA, terminals with protection from misconnection, a "Real CPI" switching position display, as well as full compatibility with all MCB accessories, the SD 200 is unique in its field of application. SD 200 comply with IEC/EN 60947-3.

PATENTED – IP 20 finger safe terminals
The SD 200 are equipped with 35 mm^2 and 10 mm^2 cylinder lift twin terminals for challenging industrial use. Cross wiring can easily be realized by inserting the busbars into the rear terminal part and the incoming wires into the front part.

Command and signaling
Switch disconnectors selection table

The SD 200 and SHD 200 extend the proven System pro M compact® series by ranges of switch disconnectors which provides state-of-the-art safety and comfort. Both are available with 1 to 4 poles with rated currents from 16 to 63 A and provides disconnection properties according to IEC/EN 60947-3.

The SD 200 offers performance on a different level. With a rated voltage of 253/440 V AC, a rated conditional short-circuit current of 25 kA, terminals with protection from misconnection and a “Real CPI” contact position indication the range is unique in its field of application. In addition SD 200 is fully compatible with all MCB accessories.

The SHD 200 has a rated voltage of 240/415 V AC. A rated conditional short-circuit current of 10 kA enables a wide range of applications.

The laser printing and the design of the devices allow a consistent optical appearance in the distribution board.

The laser printing and the design of the devices allow a consistent optical appearance in the distribution board. A VDE/CCC/EAC and KEMA approval ensures a wide scope of applications.
For technical differences between the ranges please refer to the selection table on the left page.

Command and signaling

SD 200 and SHD 200 switch disconnector ranges

Series			SD 200	SHD 200	E 200
Standards and approvals			IEC/EN 60947-3 VDE/CCC/EAC/KEMA	IEC/EN 60947-3 VDE/CCC/EAC/KEMA	IEC/EN 60947-3 VDE/CCC/KEMA
Rated currents	16...63 80...125	[A]	16/25/32/40/50/63 –	16/25/32/40/50/63 –	– 80/100/125
Rated voltage		[V AC]	253/440	240/415	240/415
Short circuit withstand capacity		[kA]	25	10	80...100 A : 25; 125 A : 6
Utilization category			AC-23A	AC-22A	AC-22A
Electrical lifetime		[Ops.]	I_e < 32 A: 20,000 (AC) I_e ≥ 32 A: 10,000 (AC)	I_e < 32 A: 20,000 (AC) I_e ≥ 32 A: 10,000 (AC)	I_e < 100 A: 1,500 (AC) I_e ≥ 125 A: 1,000 (AC)
Terminal cross section		[mm²]	35	25	50
Terminal			Cylinder lift terminal	Cage terminal	Cage terminal
Two terminal openings for conductor and busbar			Yes	No	No
Safety wire guard			Yes	No	No
Contact position indication			Marking on toggle (I ON/0 OFF) Real CPI (red ON/green OFF)	Marking on toggle (I ON/0 OFF)	Marking on toggle (I ON/0 OFF)
Combination with auxiliary elements					
Auxiliary contacts			Right side Left side Bottom side	No	Right side
Shunt trip			Yes	No	No
Undervoltage release			Yes	No	No
Motor operated remote control			Yes	No	No
Padlock			Yes	Yes	Yes
Removal without disassembling of the busbar			Yes	No	Yes

Command and signaling

SD 200 switch disconnector

SD 201

Technical data

Electrical data		
Standards		IEC/EN 60947-3
Poles		1P, 2P, 3P, 4P
Rated current I_e		16 A, 25 A, 32 A, 40 A, 50 A, 63 A
Utilization category		AC-23A, DC-21A
Rated voltage U_e		1P: 253 V AC, 60 V DC 2P: 440 V AC, 125 V DC 3...4P: 440 V AC
Insulation voltage U_i		440 V AC
Max. power frequency recovery voltage U_{max}		1P: 266 V AC, 63 V DC 2P: 462 V AC, 131 V DC 3...4P: 462 V AC
Min. operating voltage $U_{Bmin.}$		12 V AC
Rated frequency f		50/60 Hz, DC
Suitable for isolation		Yes
Rated conditional short-circuit current		25 kA in series with NH 00 ≤ 63 A gG
Overvoltage category		III
Pollution degree		3
Rated impulse withstand voltage $U_{imp.}$ (1.2/50 µs)		4 kV (test voltage 6.2 kV at sea level; 5 kV at 2,000 m)
Dielectric test voltage		2 kV (50/60 Hz, 1 min.)
Mechanical data		
Housing		Insulation group I, RAL 7035
Toggle		Insulation group II, red, sealable
Contact position indication		Marking on toggle, I ON / 0 OFF Real CPI (green OFF/red ON)
Protection degree acc. to EN 60529		IP20 / IP40 in enclosure with cover
Electrical endurance		I_e < 32 A: 20,000 ops. (AC), 1,500 ops. (DC) I_e ≥ 32 A: 10,000 ops. (AC), 1,500 ops. (DC)
Mechanical endurance		20,000 ops.
Shock resistance acc. to IEC/EN 60068-2-27		25g, 2 shocks, 13 ms
Vibration resistance acc. to IEC/EN 60068-2-6		5g, 20 cycles at 5...150...5 Hz with load 0.8 I_n
Environmental conditions (damp heat cyclic) acc. to IEC/EN 60068-2-30		28 cycles with 55 °C/90-96% and 25 °C/95-100% [°C/RH]
Ambient temperature		-25 ... +55 °C
Storage temperature		-40 ... +70 °C
Installation		
Terminal		Cylinder lift terminal
	Safety wire guard	Yes
	Two terminal openings for conductor and busbar	Yes
Cross-section of conductors		35 mm²
Cross-section of busbars		10 mm²
Torque		2.8 Nm
Screwdriver		No. 2 Pozidriv
Mounting		On DIN rail 35 mm acc. to EN 60715 by fast clip
Mounting position		Optional
Removal without disassembling of the busbar		Yes
Supply		Optional

Command and signaling

SD 200 switch disconnector

Dimensions and weight	
Mounting dimensions acc. to DIN 43880	Mounting dimension 1
Pole dimensions (H x D x W)	88 x 69 x 17.5 mm
Pole weight	Approx. 85 g
Combination with auxiliary elements	
Auxiliary contact	Yes
Signal/auxiliary contact	Yes
Shunt trip	Yes
Undervoltage release	Yes
Motor operating device	Yes
Padlock	Yes
Approvals	
	CE and RoHS-conform Approvals: VDE/CCC/EAC/KEMA

Command and signaling

SD 200 switch disconnector

SD 201

SD 202

SD 203

SD 204

SD 200

Switch disconnector acc. to IEC/EN 60947-3 for panel installation onto DIN rail (35 mm)
Mounting depth: 68 mm
Mounting width: per pole = 17.5 mm = 1 module
Colour: grey, RAL 7035
Colour of switch lever: red RAL 3000

Special features

- Isolating characteristics acc. to IEC/EN 60947-3
- Clear contact position indication in red/green (“Real CPI”)
- Highest performance at an increased voltage level: 25 kA conditional short-circuit current at U_e = 253/440 V AC acc. to IEC/EN 60947-3
- Protection degree IP20 = finger safe
- 35 mm² cylinder lift terminal with 2 terminal openings for two wires or one wire and one busbar for cross wiring
- Bottom fixed auxiliary contact as accessory for a space saving installation or upgrade of existing assemblies without additional mounting width
- Consistent design to other System pro M DIN rail products
- Cross wiring with MCBs or RCDs using busbars PS
- Durable device identification due to laser labeling
- Captive screws
- Compatibility with all MCB accessories
- Approved acc. to IEC/EN 60947-3 for international use

Ordering details

Rated current: 16 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	253	0,91	904063	SD201/16	2CDD281101R0016		0.085	10
2	440	1,81	904124	SD202/16	2CDD282101R0016		0.170	5
3	440	2,72	904186	SD203/16	2CDD283101R0016		0.255	1
4	440	3,63	904247	SD204/16	2CDD284101R0016		0.340	1

Rated current: 25 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	253	1,32	904070	SD201/25	2CDD281101R0025		0.085	10
2	440	2,65	904131	SD202/25	2CDD282101R0025		0.170	5
3	440	3,97	904193	SD203/25	2CDD283101R0025		0.255	1
4	440	5,29	904254	SD204/25	2CDD284101R0025		0.340	1

Rated current: 32 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	253	1,81	904087	SD201/32	2CDD281101R0032		0.085	10
2	440	3,63	904148	SD202/32	2CDD282101R0032		0.170	5
3	440	5,44	904209	SD203/32	2CDD283101R0032		0.255	1
4	440	7,25	904261	SD204/32	2CDD284101R0032		0.340	1

Command and signaling

SD 200 switch disconnector

SD 201

SD 202

SD 203

SD 204

Ordering details

Rated current: 40 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	253	2,27	904094	SD201/40	2CDD281101R0040		0.085	10
2	440	4,53	904155	SD202/40	2CDD282101R0040		0.170	5
3	440	6,80	904216	SD203/40	2CDD283101R0040		0.255	1
4	440	9,07	904278	SD204/40	2CDD284101R0040		0.340	1

Rated current: 50 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	253	2,83	904100	SD201/50	2CDD281101R0050		0.085	10
2	440	5,67	904162	SD202/50	2CDD282101R0050		0.170	5
3	440	8,50	904223	SD203/50	2CDD283101R0050		0.255	1
4	440	11,33	904285	SD204/50	2CDD284101R0050		0.340	1

Rated current: 63 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	253	4,50	904117	SD201/63	2CDD281101R0063		0.085	10
2	440	9,00	904179	SD202/63	2CDD282101R0063		0.170	5
3	440	13,50	904230	SD203/63	2CDD283101R0063		0.255	1
4	440	17,99	904292	SD204/63	2CDD284101R0063		0.340	1

Command and signaling

SHD 200 switch disconnector

SHD 201

Technical data

Electrical data	
Standards	IEC/EN 60947-3
Poles	1P, 2P, 3P, 4P
Rated current I_e	16 A, 25 A, 32 A, 40 A, 50 A, 63 A
Utilization category	AC-22A, DC-21A
Rated voltage U_e	1P: 240 V AC, 60 V DC 2P: 415 V AC, 125 V DC 3…4P: 415 V AC
Insulation voltage U_i	440 V AC
Max. power frequency recovery voltage U_{max}	1P: 252 V AC, 63 V DC 2P: 436 V AC, 131 V DC 3…4P: 436 V AC
Min. operating voltage $U_{Bmin.}$	12 V AC
Rated frequency f	50/60 Hz, DC
Suitable for isolation	Yes
Rated conditional short-circuit current	10 kA in series with NH 00 ≤ 63 A gG
Overvoltage category	III
Pollution degree	3
Rated impulse withstand voltage $U_{imp.}$ (1.2/50 µs)	4 kV (test voltage 6.2 kV at sea level; 5 kV at 2,000 m)
Dielectric test voltage	2 kV (50/60 Hz, 1 min.)
Mechanical data	
Housing	Insulation group II, RAL 7035
Toggle	Insulation group II, red, sealable
Contact position indication	Marking on toggle, I ON / 0 OFF
Protection degree acc. to EN 60529	IP20 / IP40 in enclosure with cover
Electrical endurance	I_e < 32 A: 20,000 ops. (AC), 1,500 ops. (DC) I_e ≥ 32 A: 10,000 ops. (AC), 1,500 ops. (DC)
Mechanical endurance	20,000 ops.
Shock resistance acc. to IEC/EN 60068-2-27	25g, 2 shocks, 13 ms
Vibration resistance acc. to IEC/EN 60068-2-6	5g, 20 cycles at 5…150…5 Hz with load 0.8 I_n
Environmental conditions (damp heat cyclic) acc. to IEC/EN 60068-2-30	28 cycles with 55 °C/90-96% and 25 °C/95-100% [°C/RH]
Ambient temperature	-25 … +55 °C
Storage temperature	-40 … +70 °C
Installation	
Terminal	Cage terminal
Safety wire guard	No
Two terminal openings for conductor and busbar	No
Cross-section of conductors	25 mm^2
Torque	2.0 Nm
Screwdriver	No. 2 Pozidriv
Mounting	On DIN rail 35 mm acc. to EN 60715 by fast clip
Mounting position	Optional
Removal without disassembling of the busbar	No
Supply	Optional

Command and signaling

SHD 200 switch disconnector

Dimensions and weight	
Mounting dimensions acc. to DIN 43880	Mounting dimension 1
Pole dimensions (H x D x W)	85 x 69 x 17.5 mm
Pole weight	Approx. 75 g
Combination with auxiliary elements	
Auxiliary contact	No
Signal/auxiliary contact	No
Shunt trip	No
Undervoltage release	No
Motor operating device	No
Padlock	Yes
Approvals	
	CE and RoHS conform **Approvals: VDE/CCC/EAC/KEMA**

Command and signaling

SHD 200 switch disconnector

SHD 201

SHD 202

SHD 203

SHD 204

SHD 200

Switch disconnector acc. to IEC/EN 60947-3 for panel installation onto DIN rail (35 mm)
Mounting depth: 69 mm
Mounting width: per pole = 17.5 mm = 1 module
Colour: grey, RAL 7035
Colour of switch lever: red RAL 3000

Special features

- Isolating characteristics acc. to IEC/EN 60947-3
- Protection degree IP20 = finger safe
- 25 mm² cage terminal
- Consistent design to all other System pro M DIN rail products
- Cross wiring with MCBs or RCDs using busbars PS
- Durable device identification due to laser labeling
- Captive screws
- Locking device as accessory for unauthorized ON/OFF switching
- Approved acc. to IEC/EN 60947-3 for international use

Ordering details

Rated current: 16 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	240	1,01	904308	SHD201/16	2CDD271111R0016		0.075	10
2	415	2,03	904360	SHD202/16	2CDD272111R0016		0.150	5
3	415	3,04	904421	SHD203/16	2CDD273111R0016		0.225	1
4	415	4,05	904483	SHD204/16	2CDD274111R0016		0.300	1

Rated current: 25 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	240	1,58	904315	SHD201/25	2CDD271111R0025		0.075	10
2	415	3,17	904377	SHD202/25	2CDD272111R0025		0.150	5
3	415	4,75	904438	SHD203/25	2CDD273111R0025		0.225	1
4	415	6,33	904490	SHD204/25	2CDD274111R0025		0.300	1

Rated current: 32 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	240	2,03	904322	SHD201/32	2CDD271111R0032		0.075	10
2	415	4,05	904384	SHD202/32	2CDD272111R0032		0.150	5
3	415	6,08	904445	SHD203/32	2CDD273111R0032		0.225	1
4	415	8,11	904506	SHD204/32	2CDD274111R0032		0.300	1

Command and signaling

SHD 200 switch disconnector

SHD 201

SHD 202

SHD 203

SHD 204

Ordering details

Rated current: 40 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	240	2,53	904339	SHD201/40	2CDD271111R0040		0.075	10
2	415	5,07	904391	SHD202/40	2CDD272111R0040		0.150	5
3	415	7,60	904452	SHD203/40	2CDD273111R0040		0.225	1
4	415	10,13	904513	SHD204/40	2CDD274111R0040		0.300	1

Rated current: 50 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	240	3,17	904346	SHD201/50	2CDD271111R0050		0.075	10
2	415	6,33	904407	SHD202/50	2CDD272111R0050		0.150	5
3	415	9,50	904469	SHD203/50	2CDD273111R0050		0.225	1
4	415	12,66	904520	SHD204/50	2CDD274111R0050		0.300	1

Rated current: 63 A

Poles	Rated voltage	Power loss per device	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	watt	EAN	Type code	Order code	piece	kg	pc.
1	240	5,03	904353	SHD201/63	2CDD271111R0063		0.075	10
2	415	10,05	904414	SHD202/63	2CDD272111R0063		0.150	5
3	415	15,08	904476	SHD203/63	2CDD273111R0063		0.225	1
4	415	20,11	904537	SHD204/63	2CDD274111R0063		0.300	1

Command and signaling

E 200 switches

E 200

Technical data E200 80...125 A

Electrical Data		
Standards	DIN EN 60947-3 (VDE0660-107); IEC/EN 60947-3	
Number of poles	1P, 2P, 3P, 4P	
Rated current I_e	80...125 A	
Rated voltage U_e	240/415 V AC; 60 V DC	
Rated frequency f	50/60 Hz; DC	
Utilization category	I_e 80 ... 125 A	AC-22A (1..4-pole)
		DC-21B (1/2-pole)
	Acc. to DIN EN 60947-3 (VDE0660-107); IEC/EN 60947-3	
Protection fuse	NH 00 gG ≤ Rated current E200	
Positive opening	Acc. to DIN VDE 0113	
Rated conditional short-circuit current	80 ... 100 A (1- to 4-pole): 25 kA, 125 A (1- to 4-pole): 6 kA	
Surge withstand capability U_{imp}	4 kV (EN 60947-1)	
Min. voltage $U_{min.}$	12 V AC/DC at 0.1 VA	
Min. contact loading	24 V AC; 4 mA	
Mechanical Data		
Housing	Grey, RAL 7035	
Toggle	Red (RAL 3000) / grey (RAL 7000), sealable	
Contact position indication	On toggle (I ON / 0 OFF), on dome (I / 0)	
Protection degree acc. to IEC/EN 60529	IP10, IP40 in enclosure with cover	
Electrical endurance	80 ... 100 A: 1,500 ops., 125 A: 1,000 ops.	
Mechanical endurance	20,000 ops.	
Environmental conditions acc. to IEC/EN 60068-2-30	Constant climate 23/83, 40/93, 55/20 [°C/RH]	
	Alternating climate 25/95 - 40/93 [°C/RH]	
Ambient temperature	-25 ... +55 °C	
Storage temperature	-40 ... +70 °C	
Installation		
Terminal size	2.5 to 50 mm^2	
Cross-section busbar	≥ 16 mm^2	
Tigthening torque	2.5 Nm	
Screw driver	Nr. 2 Pozidriv	
Mounting	On DIN rail 35 mm acc. to EN 60715 by fast clip	
Mounting position	Any	
Supply	Any	
Dimensions and weight		
Mounting dimensions acc. to DIN 43880	Mounting dimension 1	
Pole dimensions (H x D x W)	85 x 70 x 17.5 mm	
Pole weight	Ca. 95 g	
Accessories		
Auxiliary contact	Max. 3x S2C-H 6R	
Approvals	CE and RoHS conform	
	Approvals: VDE, CCC, KEMA, EAC	

Command and signaling

E 200 switches

E 201

E 200 switches
Isolator for panel installation onto DIN rail acc. to DIN EN 60715
Mounting depth: 70 mm
Mounting width: per pole = 17.5 mm = 1 module
Colour: grey, RAL 7035
Colour of switch lever: red RAL 3000 (r); grey RAL 7000 (g)

Special features

- Fast removal without dismantling of the busbar
- Captive screws with recessed/slotted head, Pozidriv size 2
- Add-on of up to 3 auxiliary contact S2C-H6R possible
- Integrated lay-on edge for labeling system ILS
- Locking device as accessory for unauthorized ON/OFF
- Approval: VDE, CCC, KEMA, EAC

Ordering details

Rated current: 80 A

Poles	Rated voltage	Power loss	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W	EAN	Type code	Order code		kg	pc.
1NO	240	2.60	645737	E201/80g	2CDE281001R1080		0.095	10
1NO	240	2.60	645744	E201/80r	2CDE281001R0080		0.095	10
2NO	415	5.15	645911	E202/80g	2CDE282001R1080		0.190	5
2NO	415	5.15	645928	E202/80r	2CDE282001R0080		0.190	5
3NO	415	7.75	646093	E203/80g	2CDE283001R1080		0.290	3
3NO	415	7.75	646109	E203/80r	2CDE283001R0080		0.290	3
4NO	415	10.30	646277	E204/80g	2CDE284001R1080		0.390	2
4NO	415	10.30	646284	E204/80r	2CDE284001R0080		0.390	2

Rated current: 100 A

Poles	Rated voltage	Power loss	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	W	EAN	Type code	Order code	piece	kg	pc.
1NO	240	3.95	645751	E201/100g	2CDE281001R1100		0.095	10
1NO	240	3.95	645738	E201/100r	2CDE281001R0100		0.095	10
2NO	415	7.90	645935	E202/100g	2CDE282001R1100		0.190	5
2NO	415	7.90	645942	E202/100r	2CDE282001R0100		0.190	5
3NO	415	11.85	646116	E203/100g	2CDE283001R1100		0.290	3
3NO	415	11.85	646123	E203/100r	2CDE283001R0100		0.290	3
4NO	415	15.80	646291	E204/100g	2CDE284001R1100		0.390	2
4NO	415	15.80	646307	E204/100r	2CDE284001R0100		0.390	2

Rated current: 125 A

Poles	Rated voltage	Power loss	Bbn 4016779	Order details		Price 1	Weight 1 piece	Pack unit
	V AC	W	EAN	Type code	Order code	piece	kg	pc.
1NO	240	6.10	645775	E201/125g	2CDE281001R1125		0.095	10
1NO	240	6.10	645782	E201/125r	2CDE281001R0125		0.095	10
2NO	415	12.20	645959	E202/125g	2CDE282001R1125		0.190	5
2NO	415	12.20	645966	E202/125r	2CDE282001R0125		0.190	5
3NO	415	18.30	646130	E203/125g	2CDE283001R1125		0.33	3
3NO	415	18.30	646147	E203/125r	2CDE283001R0125		0.33	3
4NO	415	24.35	646314	E204/125g	2CDE284001R1125		0.44	2
4NO	415	24.35	646321	E204/125r	2CDE284001R0125		0.44	2

Command and signaling

E 463/3 switches

E463/3-KB

E463/3-SL

SA 2

Technical features	
Standards	IEC/EN 60669-1, IEC/EN 60669-2-4
Rated voltage	400 V AC
Connection cross section	1 mm² up to 25 mm²
Pick-up torque	3 Nm max.
Ambient temperature	-25°C to +55°C
Storage temperature	-40°C to +70°C
Poles	3 NO
Rated conditional short-circuit current	400 V AC, 10 kA in series with NH 00 < 63 A gG

E 463/3-KB, E 463/3-SL switches

Rated current	Power loss	Rated voltage	Bbn 7612270	Order details		Price 1	Weight 1 piece	Pack unit
(per pole)	W	V AC	EAN	Type code	Order code	piece	kg	pc.
63	5.4	250/400	932528	E 463/3-KB	2CCE160300R0131		0.190	1
63	5.5	250/400	932535	E 463/3-SL	2CCE160301R0131		0.195	1

Padlock for E 463/3-SL with 2 keys

	Bbn 7612270	Order details		Price 1	Weight 1 piece	Pack unit
	EAN	Type code	Order code	piece	kg	pc.
	587704	SA 2	GJF1101903R0002		0.020	1

Command and signaling

E 210 switches

E 210

On-off switches

General	
Overall depth	68 mm
Width	0.5 or 1 module (9 or 18 mm)
Colour	grey, RAL 7035
Climatic resistance to	IEC 60068-2-2 (dry heat)
	IEC 60068-2-30 (humid heat)
	IEC 60068-2-1 (low temperatures)
Ambient temperature	- 25°C to + 55°C
Storage temperature	- 40°C to + 70°C
Connection cross-section (Cu)	from 1 x 1 mm2 to 1 x 6 mm2 or 2 x 2.5 mm2 solid;
	from 1x 0.75 mm2 to 2 x 1.5 mm2 flexible
	with end ferrule or pin cable lug
Tightening torque	1.2-1.5 Nm
Contacts	Double interrupting
On-off switches (E211; E211X)	
Short-circuit withstand capacity Inc	3 kA; at 400 V cos j = 0.8 (with fusing ≤ 35 A / NH00)
Rated current In	16 A, 25 A, 32 A
Rated voltage Un	
in accordance with EN	250 VAC, 400 VAC
in accordance UL 508	240 VAC
Rated impulse withstand voltage Uimp	6 kV
Lowest operating voltage	24 VAC; 25 mA
Isolating features	to EN60669-2-4; IEC/EN 60947-3
Utilization category	AC-22 A, DC-22 A acc. IEC/EN 60947-3
LED voltage ranges	On-off switches E211X 115-250 VAC (Tolerance +/- 10%)
Frequency	50/60 Hz
Sealable	in the On and Off positions
Standards	DIN EN 60669-1 *VDE 0632-1
	DIN EN 60669-2-4 *VDE 0632-2-4
	UL 508
Approvals	VDE; UL; CCC

Utilization category for E211 On-off switches (according to standard IEC 60947-3)

Type	**In**	**Utilization category**		
		DC-22 A		**AC-22 A**
E211-16-...	16 A	50 VDC / 16 A	200 VDC / 1 A	400 VAC / 16 A
E211-25-...	25 A	50 VDC / 25 A	200 VDC / 2 A	400 VDC / 25 A
E211-32-...-	32 A	50 VDC / 32 A	200 VDC / 3 A	400 VDC / 32 A

Command and signaling

E 210 switches

E 210

Change over, Group and control switches, pushbuttons and indicator lights

Change over, Group and Control switches (E213; E214; E218)	
Rated current In	16 A, 25 A
Rated voltage Un	
in accordance with EN	250 VAC
in accordance UL 508	240 VAC
Lowest operating voltage	24 VAC; 25 mA
Frequency	50/60 Hz
Switches sealable	in the On and Off positions
Standards	DIN EN 60669-1 *VDE 0632-1
	UL 508
Approvals	VDE; UL; CCC
Pushbuttons without and with LED (E215; E217)	
Rated current In	16 A
Rated voltage Un	
in accordance with EN	250 VAC
in accordance UL 508	240 VAC
Lowest operating voltage	24 VAC; 25 mA
LED voltage ranges	12-48 VAC / DC; 115-250 VAC; 60-220 VDC (Tolerance +/- 10%)
Frequency	50/60 Hz
Standards	DIN EN 60669-1 *VDE 0632-1
	UL 508
Approvals	VDE; UL; CCC
Indicator lights (E219)	
LED voltage ranges	12-48 VAC / DC; 115-250 VAC; 60-220 VDC (Tolerance +/- 10%)
LED life time	50.000 hours
Frequency	50/60 Hz
Insulation voltage	250 V
Rated impulse withstand voltage Uimp	4 kV
Relative humidity	95% (non-condensing)
Dissipated power	0.47-1 W
Standards	DIN EN 62094-1
	UL 508
Approvals	VDE; UL; *1
Indicator lights with 2 LEDs	
LED voltage ranges	115-250 VAC; 12-48 VAC (tolerance +/- 10%)
Frequency	50/60 Hz
Insulation voltage	250 V
Rated impulse withstand voltage Uimp	4 kV
Dissipated power	0.8 W
Standards	DIN EN 62094-1
Approvals	VDE; *1
Indicator lights with 3 LEDs	
LED voltage ranges	415/250 VAC (tolerance +/- 10%)
Frequency	50/60 Hz
Insulation voltage	250 V
Rated impulse withstand voltage Uimp	4 kV
Dissipated power	1.2 W
Relative humidity	95% (non-condensing)
Standards	DIN EN 62094-1
Approvals	VDE; *1

*1 = CCC approval not required

Command and signaling

E 210 switches

E 211-16-10

E211-16-20

These devices are specifically made for commanding loads and signaling electrical conditions in any low-voltage switchboard. They are available in half module or 1 module, depending on the contact-layout. The devices with indicator lights are equipped with a LED, which grants an optimal illumination with very low consumption.

The functions of these devices are particularly switching, pushing and signaling electrical conditions in any installations (low-voltage area)

General features

- Space-saving through 9 mm modules
- All terminals equipped with Pozidrive 1 screws
- Safe connection due to cage-clamp
- LED with bright colours and available in three different voltage ranges
- Different lens and button colours
- Compliance to international standards

E 211-... ON-OFF switches

For example, such devices are used to switch indicators or other electrical components (like fan's, air-conditions, e.g.). The On-Off switches distinguish themselves through simple handling, easy mounting and optimal functionality.

Rated current = 16 A

Contacts	Rated voltage	Power loss	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W	mm	EAN	Type code	Order code		kg	pc.
1 NO	250	0.32	9	938575	E211-16-10	2CCA703000R0001		0.035	10
2 NO	250/400	0.82	9	938582	E211-16-20	2CCA703005R0001		0.045	10
3 NO	250/400	1.14	18	938599	E211-16-30	2CCA703010R0001		0.080	10
4 NO	250/400	1.64	18	938605	E211-16-40	2CCA703015R0001		0.090	10

Rated current = 25 A

Contacts	Rated voltage	Power loss	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W	mm	EAN	Type code	Order code		kg	pc.
1 NO	250	0.75	9	938612	E211-25-10	2CCA703001R0001		0.035	10
2 NO	250/400	1.95	9	938629	E211-25-20	2CCA703006R0001		0.045	10
3 NO	250/400	2.70	18	938636	E211-25-30	2CCA703011R0001		0.080	10
4 NO	250/400	3.90	18	938643	E211-25-40	2CCA703016R0001		0.090	10

Rated current = 32 A

Contacts	Rated voltage	Power loss	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W	mm	EAN	Type code	Order code		kg	pc.
1 NO	250	1.12	9	938650	E211-32-10	2CCA703002R0001		0.035	10
2 NO	250/400	2.73	9	938667	E211-32-20	2CCA703007R0001		0.045	10
3 NO	250/400	3.85	18	938674	E211-32-30	2CCA703012R0001		0.080	10
4 NO	250/400	5.46	18	938681	E211-32-40	2CCA703017R0001		0.090	10

Command and signaling

E 210 switches

E211X-16-10

E211X-16-20

E213-16-001

E 213-16-002

E 211X-... On-Off switches with yellow LED for contact indication

LED voltage 115-250 V AC

Rated current = 16 A										
Contacts	Rated voltage	Power loss	LED colour	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W		mm	EAN	Type code	Order code		kg	pc.
1 NO	250	0.50	yellow	9	938872	E211X-16-10	2CCA703100R0001		0.040	10
2 NO	250/400	1.00	yellow	18	938889	E211X-16-20	2CCA703110R0001		0.050	10
3 NO	250/400	1.50	yellow	18	938896	E211X-16-30	2CCA703115R0001		0.060	10

Rated current = 25 A										
Contacts	Rated voltage	Power loss	LED colour	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W		mm	EAN	Type code	Order code		kg	pc.
1 NO	250	1.15	yellow	9	938902	E211X-25-10	2CCA703101R0001		0.040	10
2 NO	250/400	2.30	yellow	18	938919	E211X-25-20	2CCA703111R0001		0.050	10
3 NO	250/400	3.45	yellow	18	938926	E211X-25-30	2CCA703116R0001		0.060	10

E 213-... Change over switches

The change-over switches distinguish themselves through simple handling, easy mounting and optimal functionality. Example applications include opening and closing of electrically operated flaps.

Rated current = 16 A										
Contacts	Rated voltage	Power loss	LED colour	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W		mm	EAN	Type code	Order code		kg	pc.
1 CO	250	0.32	-	9	938698	E213-16-001	2CCA703040R0001		0.041	10
2 CO	250	0.82	-	18	938704	E213-16-002	2CCA703045R0001		0.082	10

Rated current = 25 A										
Contacts	Rated voltage	Power loss	LED colour	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W		mm	EAN	Type code	Order code		kg	pc.
1 CO	250	0.40	-	9	938711	E213-25-001	2CCA703041R0001		0.041	10
2 CO	250	0.88	-	18	938728	E213-25-002	2CCA703046R0001		0.082	10

Command and signaling

E 210 switches

E214-16-101

E214-16-202

E 218-16-11

E 218-16-22

E 214-... Group switches (I-0-II, manual-OFF-automatic)
The Group switches can be used to control the main installation of an emergency supply. Such devices distinguish themselves through simple handling, easy mounting and optimal functionality.

Rated current = 16 A									
Contacts	Rated voltage	Power loss	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W	mm	EAN	Type code	Order code		kg	pc.
1 CO	250	0.32	9	938735	E214-16-101	2CCA703025R0001		0.041	10
2 CO	250	0.82	18	938742	E214-16-202	2CCA703030R0001		0.082	10

Rated current = 25 A									
Contacts	Rated voltage	Power loss	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W	mm	EAN	Type code	Order code		kg	pc.
1 CO	250	0.40	9	938759	E214-25-101	2CCA703026R0001		0.041	10
2 CO	250	0.88	18	938766	E214-25-202	2CCA703031R0001		0.082	10

E 218-... Control switches
These devices can be used in distribution board for any control function. The control switches distinguish themselves through simple handling, easy mounting and optimal functionality.

Rated current = 16 A									
Contacts	Rated voltage	Power loss	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W	mm	EAN	Type code	Order code		kg	pc.
1NO+1NC	250	0.50	9	938773	E218-16-11	2CCA703050R0001		0.041	10
2NO+2NC	250	1.00	18	938780	E218-16-22	2CCA703060R0001		0.082	10
3NO+1NC	250	1.50	18	938797	E218-16-31	2CCA703065R0001		0.082	10

Rated current = 25 A									
Contacts	Rated voltage	Power loss	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W	mm	EAN	Type code	Order code		kg	pc.
1NO+1NC	250	0.75	9	938803	E218-25-11	2CCA703051R0001		0.041	10

Command and signaling

E 210 pushbuttons

E 215

E 217

E 215-... Pushbuttons (6 different button colours)
Pushbuttons without and with LED
These products are available in 9 mm widths (= 0.5 modules).
The devices can be used in distribution boards and are all distinguished by their simple handling, ease of mounting and optimal functionality. The pushbuttons are used for remote control in all kinds of electrical installation (e.g. public, industrial). The range offers three different voltages. (Ranges: 12-48 V AC/DC; 115-250 V AC and 60-220 V DC).

Rated current = 16 A										
Contacts	Rated voltage	Power loss	Button colour	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W		mm	EAN	Type code	Order code		kg	pc.
1NO+1NC	250	0.50	grey	9	938810	E215-16-11B	2CCA703150R0001		0.046	10
1NO+1NC	250	0.50	red	9	938827	E215-16-11C	2CCA703151R0001		0.046	10
1NO+1NC	250	0.50	green	9	938834	E215-16-11D	2CCA703152R0001		0.046	10
1NO+1NC	250	0.50	yellow	9	938841	E215-16-11E	2CCA703153R0001		0.046	10
1NO+1NC	250	0.50	black	9	938858	E215-16-11F	2CCA703154R0001		0.046	10
1NO+1NC	250	0.50	blue	9	938865	E215-16-11G	2CCA703155R0001		0.046	10

E 217-... Luminous Pushbuttons (5 different LED colours)

LED Voltage range = 115-250 V AC										
Contacts	Rated voltage	Power loss	LED colour	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
	V AC	W		mm	EAN	Type code	Order code		kg	pc.
1 NO	250	1.10	white	9	938988	E217-16-10B	2CCA703160R0001		0.050	10
1 NO	250	1.10	red	9	938995	E217-16-10C	2CCA703161R0001		0.050	10
1 NO	250	1.10	green	9	939008	E217-16-10D	2CCA703162R0001		0.050	10
1 NO	250	1.10	yellow	9	939015	E217-16-10E	2CCA703163R0001		0.050	10
1 NO	250	1.10	blue	9	939022	E217-16-10G	2CCA703164R0001		0.050	10
1 NC	250	1.10	white	9	939084	E217-16-01B	2CCA703250R0001		0.050	10
1 NC	250	1.10	red	9	939091	E217-16-01C	2CCA703251R0001		0.050	10
1 NC	250	1.10	green	9	939107	E217-16-01D	2CCA703252R0001		0.050	10
1 NC	250	1.10	yellow	9	939114	E217-16-01E	2CCA703253R0001		0.050	10
1 NC	250	1.10	blue	9	939121	E217-16-01G	2CCA703254R0001		0.050	10

Command and signaling

E 210 pushbuttons

E 217

E 217-... Luminous Pushbuttons (5 different LED colours)

LED Voltage range = 12-48 V AC/DC										
Contacts	**Rated voltage**	**Power loss**	**LED colour**	**Width**	**Bbn 7612270**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	V AC	**W**		**mm**	**EAN**	**Type code**	**Order code**		**kg**	**pc.**
1 NO	250	0.72	white	9	938933	E217-16-10B48	2CCA703170R0001		0.050	10
1 NO	250	0.72	red	9	938940	E217-16-10C48	2CCA703171R0001		0.050	10
1 NO	250	0.72	green	9	938957	E217-16-10D48	2CCA703172R0001		0.050	10
1 NO	250	0.72	yellow	9	938964	E217-16-10E48	2CCA703173R0001		0.050	10
1 NO	250	0.72	blue	9	938971	E217-16-10G48	2CCA703174R0001		0.050	10
1 NC	250	0.72	white	9	939039	E217-16-01B48	2CCA703260R0001		0.050	10
1 NC	250	0.72	red	9	939046	E217-16-01C48	2CCA703261R0001		0.050	10
1 NC	250	0.72	green	9	939053	E217-16-01D48	2CCA703262R0001		0.050	10
1 NC	250	0.72	yellow	9	939060	E217-16-01E48	2CCA703263R0001		0.050	10
1 NC	250	0.72	blue	9	939077	E217-16-01G48	2CCA703264R0001		0.050	10

LED Voltage range = 60-220 V DC										
Contacts	**Rated voltage**	**Power loss**	**LED colour**	**Width**	**Bbn 7612270**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	V AC	**W**		**mm**	**EAN**	**Type code**	**Order code**		**kg**	**pc.**
1 NO	250	1.50	white	9	939138	E217-16-10B220	2CCA703165R0001		0.050	10
1 NO	250	1.50	red	9	939145	E217-16-10C220	2CCA703166R0001		0.050	10
1 NO	250	1.50	green	9	939152	E217-16-10D220	2CCA703167R0001		0.050	10
1 NO	250	1.50	yellow	9	939169	E217-16-10E220	2CCA703168R0001		0.050	10
1 NO	250	1.50	blue	9	939176	E217-16-10G220	2CCA703169R0001		0.050	10
1 NC	250	1.50	white	9	939183	E217-16-01B220	2CCA703255R0001		0.050	10
1 NC	250	1.50	red	9	939190	E217-16-01C220	2CCA703256R0001		0.050	10
1 NC	250	1.50	green	9	939206	E217-16-01D220	2CCA703257R0001		0.050	10
1 NC	250	1.50	yellow	9	939213	E217-16-01E220	2CCA703258R0001		0.050	10
1 NC	250	1.50	blue	9	939220	E217-16-01G220	2CCA703259R0001		0.050	10

Command and signaling

E 210 indicator lights

E 219

E 219-... Indicator Lights with LED (5 different colours)
The indicator lights warrant a clear overview of the operating states of electrical equipment from one central location. The long useful life of LED technology promises maintenance-free operation for up to 50.000 hours.
For comparison: the incandescent bulbs previously used had a maximum operating operating time of 10.000 hours.
These products are available in 9 mm width (= 0.5 modules) and can be used for indicating any operational condition such as signaling loss of a phase.
The range offers three different voltages.
(Ranges: 12-48 V AC/DC; 115-250 V AC and 110-220 V DC).

Single indicator light - LED Voltage range = 115-250 V AC

Power loss	LED colour	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
W		mm	EAN	Type code	Order code		kg	pc.
0.47	white	9	939282	E219-B	2CCA703400R0001		0.04	10
0.47	red	9	939299	E219-C	2CCA703401R0001		0.04	10
0.47	green	9	939305	E219-D	2CCA703402R0001		0.04	10
0.47	yellow	9	939312	E219-E	2CCA703403R0001		0.04	10
0.47	blue	9	939329	E219-G	2CCA703404R0001		0.04	10

Single indicator light - LED Voltage range = 12-48 V AC/DC

Power loss	LED colour	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
W		mm	EAN	Type code	Order code		kg	pc.
0.40	white	9	939237	E219-B48	2CCA703420R0001		0.04	10
0.40	red	9	939244	E219-C48	2CCA703421R0001		0.04	10
0.40	green	9	939251	E219-D48	2CCA703422R0001		0.04	10
0.40	yellow	9	939268	E219-E48	2CCA703423R0001		0.04	10
0.40	blue	9	939275	E219-G48	2CCA703424R0001		0.04	10

Single indicator light - LED Voltage range = 60-220 V DC

Power loss	LED colour	Width	Bbn 7612270	Order details		Price 1 piece	Weight 1 piece	Pack unit
W		mm	EAN	Type code	Order code		kg	pc.
1.00	white	9	939336	E219-B220	2CCA703405R0001		0.04	10
1.00	red	9	939343	E219-C220	2CCA703406R0001		0.04	10
1.00	green	9	939350	E219-D220	2CCA703407R0001		0.04	10
1.00	yellow	9	939367	E219-E220	2CCA703408R0001		0.04	10
1.00	blue	9	939374	E219-G220	2CCA703409R0001		0.04	10

Command and signaling

E 210 indicator lights

E 219-2CD

Double indicator light - LED Voltage range = 12-24 V AC								
Power loss	LED colour	Width	Bbn 7612271	Order details		Price 1 piece	Weight 1 piece	Pack unit
W		mm	EAN	Type code	Order code		kg	pc.
0.8	green, red	9	413347	E219-2CD48	2CCA703911R0001		0.042	10

E 219-3CDE

Double indicator light - LED Voltage range = 115-230 V AC								
Power loss	LED colour	Width	Bbn 7612271	Order details		Price 1 piece	Weight 1 piece	Pack unit
W		mm	EAN	Type code	Order code		kg	pc.
0.8	green, red	9	413330	E219-2CD	2CCA703910R0001		0.042	10

Triple indicator light - LED Voltage range = 415-230 V AC								
Power loss	LED colour	Width	Bbn 7612271	Order details		Price 1 piece	Weight 1 piece	Pack unit
W		mm	EAN	Type code	Order code		kg	pc.
1.2	red, red, red	9	413309	E219-3C	2CCA703900R0001		0.044	10
1.2	green, green, green	9	413316	E219-3D	2CCA703901R0001		0.044	10
1.2	red, yellow, green	9	413323	E219-3CDE	2CCA703902R0001		0.044	10

Command and signaling

E 210 accessories

E 210-DH

Accessories for E 210 device series

Dummy housing for 9 mm wide units
The modular width of 18 mm must be complied with to use the devices in the SMISSLINE socket system. The dummy housing is ready-made with two expanding connectors. Dummy housing.

		Order details		Price 1 piece	Weight 1 piece	Pack unit
Snap on	EAN	Type code	Order code		kg	pc.
Left	7612270404208	E210-DH	2CCA703480R0001		0.18	10
Right	7612271441708	E210-DHR	2CCA703488R0001		0.18	10

E 210-ASV9

Padlock						
		Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
to use for 9 and 18 mm wide units	7612270404215	E210-ASV9	2CCA703648R0001		0.01	10

	Description/ application	Bbn 761227 EAN	Type code	Aborder code	Pack unit	Weight 1 piece
Module without wires, Spare parts	Connection pin to mount 2 combi modules together	1414801	E210-SPV	2CCC703715R0001	Set of 30 pces	0.01

Command and signaling

Installation contactors

ABB's hum-free installation contactor designs now offer a wider range of ratings from 16 A to 100 A. Widely used in buildings for switching and controlling lighting, heating, ventilation, EV charging stations, motor and pumps, the installation contactors take noise reduction to a new level. With an innovative AC / DC coil design that eliminates hum, a broad selection of common accessories as well as manual and automatic versions, installation contactors offer peace of mind in noise-sensitive applications.

Optimum interface

Quiet and reliable in every application
ABB's hum-free contactors feature innovative AC / DC coils. The range covers ratings from 16 A to 100 A and offers accessories to suit customer requirements in every application. An integrated indicator makes diagnostics quicker and provides reliable information about the contactor's status at a glance.

Easy to install

Simple solution that saves time
Reduce installation time and stock levels, with a universal auxiliary contact block that can be attached to the contactors by hand. Installation contactors fit easily with ABB's System Pro M compact range, making them fully compatible with other modular DIN-rail components.

Global availability

Whatever you need, wherever you need it
Installation contactors are available in single and multi-packs to meet different customer needs and to optimize warehousing space. Every ABB product enjoys expert local support worldwide to make communication easier and delivery faster.

Command and signaling
Installation contactors
Features and benefits

Hum-free operation
With an innovative AC / DC design that eliminates hum, the range meets the needs of applications demanding silent operation, for example hotel rooms and residential buildings.

Single and multiple packaging
The right packaging for your needs- our products are available in a choice of different packaging and delivery quantities. This allows you to warehouse according to your needs and save up to 50% on your inventory.



Wide application range
The ESB installation contactors range meets both the industrial standard IEC 60947-4-1 and the household standard IEC 61095 as well as pollution degree class 3. Due to multiple certification and inherent robustness, the contactors can be used in 10% more applications in both residential and industrial settings.

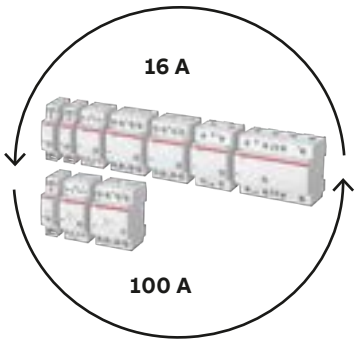

Comprehensive solution
ABB's ESB and EN installation contactors range offers a complete solution from 16 A to 100 A, offering an answer to all customer needs from a single supplier.
With 16 A, 25 A and 100 A versions, tender specifications can be met with competitive pricing.

Command and signaling

Installation contactors

Features and benefits

Save up to 15% space with group mounting
ESB16..N, ESB/EN20..N and ESB100..N can be group mounted. There is no need for a distance piece in between contactors, saving both valuable space in cabinets and money.



Built-in protective circuit
Protect the contactor without additional space-demanding components against remote lightning strikes and overvoltages.

Design in accordance with System Pro M
Contactors and accessories are designed according to System pro M range and ABB´s modular DIN-rail components and fit in dedicated panels.

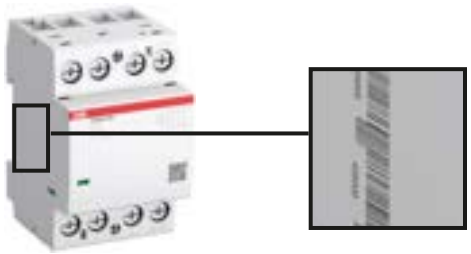

EAN-code for an easy identification
Just scan the QR-code printed on the front of the devices and save up to 80% time identifying the product. With the EAN-code printed on the side of the devices, handling and identifying your products in warehouse and cashier system is easy.

Command and signaling

Installation contactors

Easy installation and maintenance

ABB´s installation contactors come with many features that make installation and maintenance easier. The mechanical Indicator with green and red color for status indication ensures a quick diagnostic of the system. Also, some specialty types feature a manual override functionality with a toggle switch to control independently from control source. Accessories can be mounted tool-free on the contactor, for example auxiliaries, space holders as well as security and safety covers.

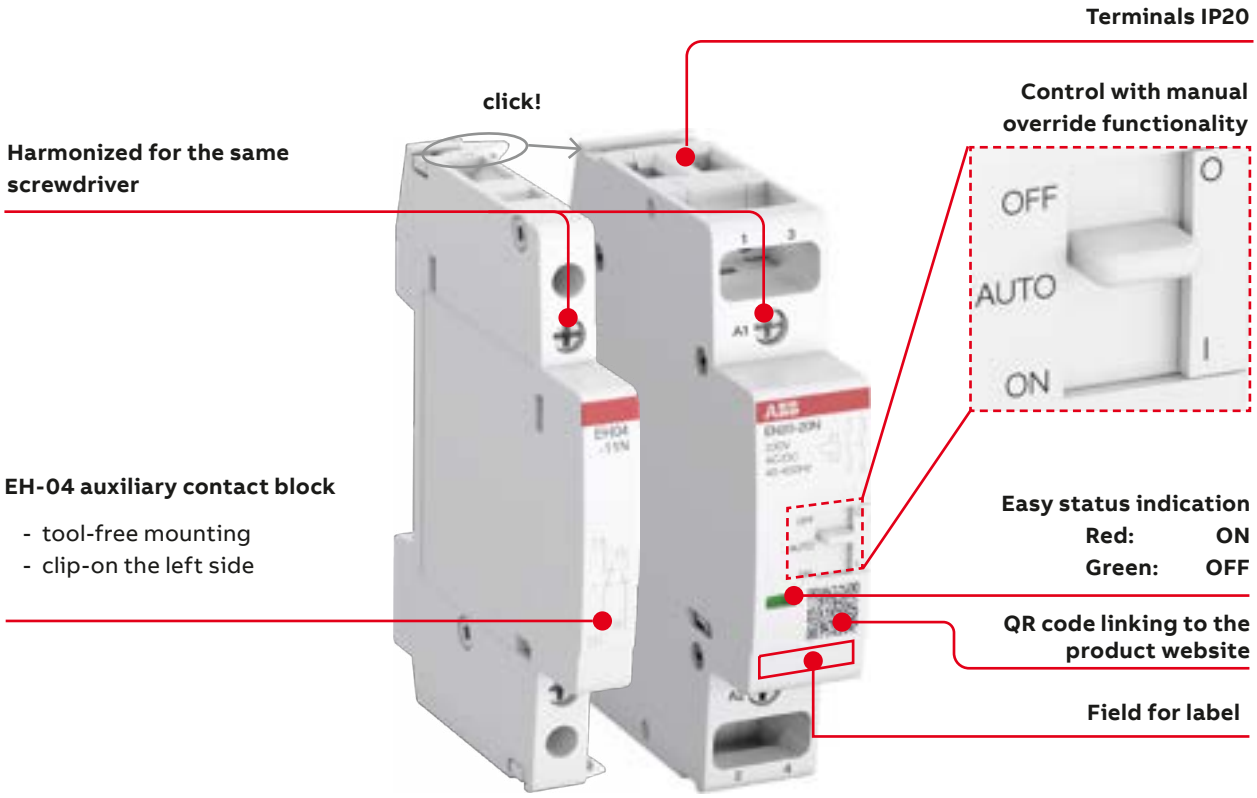

Operation mode EN-versions

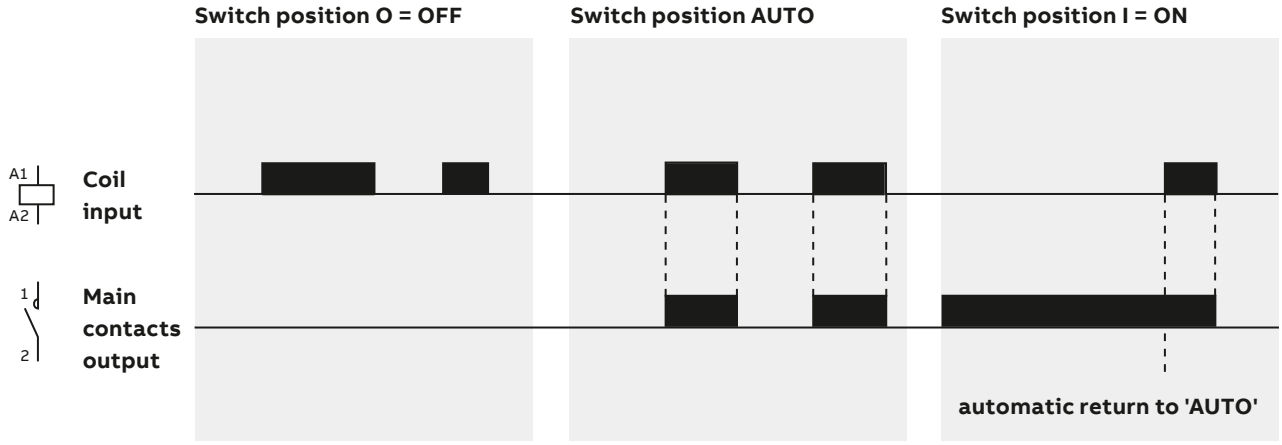

Command and signaling

Installation contactors

Overview contactors

Type			ESB16..N	ESB20..N EN20..N	ESB25..N EN25..N	ESB40..N EN40..N	ESB63..N	ESB100..N
AC-1/AC-7a (A)			16	20	25	40	63	100
Modular Width			1	1	2	3	3	3/6
Accessories								
Auxiliary contact blocks		2 NO	EH04-20N	EH04-20N	EH04-20N	EH04-20N	EH04-20N	EH04-20N
		1 NO + 1 NC	EH04-11N	EH04-11N	EH04-11N	EH04-11N	EH04-11N	EH04-11N
Distance piece	up to 40 °C		-	-	-	-	-	-
	between 40 °C and 55 °C		-	-	ESB-DIS*	ESB-DIS*	ESB-DIS*	-
Covers			-	-	ESB-PLK24	ESB-PLK40/63	ESB-PLK40/63	-

*If several contactors are mounted adjacently and the duty time is longer than one hour, every second contactor needs a distance piece, Type ESB-DIS (1/2 module).
This is not necessary at an ambient temperature ≤ 40 °C .

Command and signaling
Installation contactors
Overview accessories

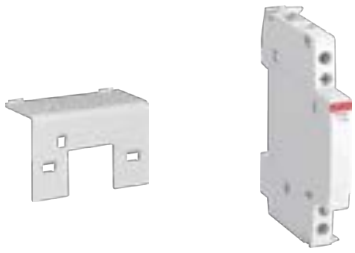

Tool-free accessories
Speed up installation and maintenance time by mounting accessories tool-free to the contactor. Auxiliaries, security safety covers and space holders are easily and quickly installed.



Distance pieces
If the ambient temperature in your control cabinet exceeds 40 °C and the duty time is longer than an hour, you need to use a distance piece between each second contactor for the ESB25..N to ESB63..N.

Sealing covers
Protect the security of your employees/ customers´ installation with sealing covers. They are available in different sizes and can be clipped on easily.

Auxiliary contact blocks
ABB´s new range of auxiliary contact blocks are mounted on the left side of the contactors. Simply clip them on - no tools required!
Valuable inventory space can be saved with the new auxiliary contact block which is designed to fit all contactors of the range.

Command and signaling

Installation contactors

Ordering details ESB16..N - 16 A, AC-1 /AC-7a, AC/DC operated

ESB16..N

The ESB16..N installation contactors are used to control single-phase loads up to 16 A and can be operated by AC or DC voltages. These contactors are made for use in household applications as well as in industrial environment.
ESB16..N series is providing the following benefits:

- Hum-free operation, low power consumption and integrated overvoltage protection.
- Various contact combinations and accessories are available.

Main contacts	Width[1]	Rated control circuit voltage[2]	Bbn 3471523	Order details		Price 1 piece	Weight 1 piece	Pack unit
		V AC/DC	EAN	Type code	Order code		kg	pc.
Single packaging								
	1	24	004337	ESB16-20N-01	1SBE111111R0120		0.14	1
		230	004481	ESB16-20N-06	1SBE111111R0620		0.14	1
	1	24	004313	ESB16-02N-01	1SBE111111R0102		0.14	1
		230	004467	ESB16-02N-06	1SBE111111R0602		0.14	1
	1	24	004320	ESB16-11N-01	1SBE111111R0111		0.14	1
		230	004474	ESB16-11N-06	1SBE111111R0611		0.14	1
Multiple packaging								
	1	24	004726	ESB16-20N-01	1SBE111111M0120		0.14	12
		230	004870	ESB16-20N-06	1SBE111111M0620		0.14	12
	1	24	004702	ESB16-02N-01	1SBE111111M0102		0.14	12
		230	004856	ESB16-02N-06	1SBE111111M0602		0.14	12
	1	24	004719	ESB16-11N-01	1SBE111111M0111		0.14	12
		230	004863	ESB16-11N-06	1SBE111111M0611		0.14	12

(1) In number of modular spacings.
(2) Other control voltages: see voltage code table and contact ABB for availability of products.

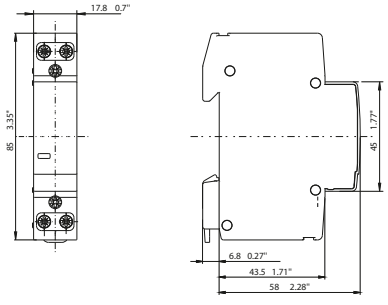

ESB16..N

Dimensions mm, inches

Command and signaling

Installation contactors

Ordering details ESB20..N - 20 A, AC-1 /AC-7a, AC/DC operated

ESB20..N

The ESB20..N installation contactors are used to control single-phase loads up to 20 A and can be operated by AC or DC voltages. These contactors are made for use in household applications as well as in industrial environment.
ESB20..N series is providing the following benefits:

- Hum-free operation, low power consumption and integrated overvoltage protection.
- Various contact combinations and accessories are available.

Main contacts	Width[1]	Rated control circuit voltage[2]	Bbn 3471523	Order details		Price 1 piece	Weight 1 piece	Pack unit
		V AC/DC	EAN	Type code	Order code		kg	pc.
Single packaging								
	1	24	004566	ESB20-20N-01	1SBE121111R0120		0.14	1
		230	004641	ESB20-20N-06	1SBE121111R0620		0.14	1
	1	24	004559	ESB20-02N-01	1SBE121111R0102		0.14	1
		230	005372	ESB20-02N-06	1SBE121111R0602		0.14	1
	1	24	005310	ESB20-11N-01	1SBE121111R0111		0.14	1
		230	005389	ESB20-11N-06	1SBE121111R0611		0.14	1
Multiple packaging								
	1	24	004962	ESB20-20N-01	1SBE121111M0120		0.14	12
		230	005112	ESB20-20N-06	1SBE121111M0620		0.14	12
	1	24	004948	ESB20-02N-01	1SBE121111M0102		0.14	12
		230	005099	ESB20-02N-06	1SBE121111M0602		0.14	12
	1	24	004955	ESB20-11N-01	1SBE121111M0111		0.14	12
		230	005105	ESB20-11N-06	1SBE121111M0611		0.14	12

(1) In number of modular spacings.
(2) Other control voltages: see voltage code table and contact ABB for availability of products.

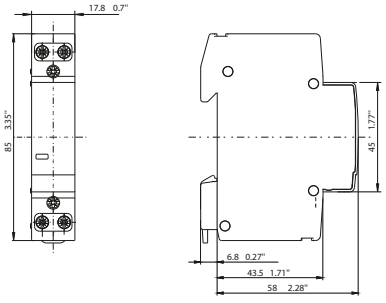

ESB20..N

Dimensions mm, inches

Command and signaling

Installation contactors

Ordering details ESB25..N - 25 A, AC-1/AC-7a, AC/DC operated

ESB25..N

The ESB25..N installation contactors are used to control single and three-phases loads up to 25 A and can be operated by AC or DC voltages. These contactors are made for use in household applications as well as in industrial environment.
ESB25..N series is providing the following benefits:

- Hum-free operation, low power consumption and integrated overvoltage protection.
- Various contact combinations and accessories are available.

Main contacts	Width[1]	Rated control circuit voltage[2]	Bbn 4013614	Order details		Price 1 piece	Weight 1 piece	Pack unit
		V AC/DC	EAN	Type code	Order code		kg	pc.
Single packaging								
	2	24	523977	ESB25-40N-01	1SAE231111R0140		0.245	1
		230...240	524257	ESB25-40N-06	1SAE231111R0640		0.235	1
	2	24	523915	ESB25-04N-01	1SAE231111R0104		0.245	1
		230...240	524196	ESB25-04N-06	1SAE231111R0604		0.235	1
	2	24	523946	ESB25-22N-01	1SAE231111R0122		0.245	1
		230...240	524226	ESB25-22N-06	1SAE231111R0622		0.235	1
	2	24	523960	ESB25-31N-01	1SAE231111R0131		0.245	1
		230...240	524240	ESB25-31N-06	1SAE231111R0631		0.235	1
	2	24	523922	ESB25-13N-01	1SAE231111R0113		0.245	1
		230...240	524202	ESB25-13N-06	1SAE231111R0613		0.235	1
Multiple packaging								
	2	24	519420	ESB25-40N-01	1SAE231111M0140		0.245	6
		230...240	519703	ESB25-40N-06	1SAE231111M0640		0.235	6
	2	24	519369	ESB25-04N-01	1SAE231111M0104		0.245	6
		230...240	519642	ESB25-04N-06	1SAE231111M0604		0.235	6
	2	24	519390	ESB25-22N-01	1SAE231111M0122		0.245	6
		230...240	519673	ESB25-22N-06	1SAE231111M0622		0.235	6
	2	24	519413	ESB25-31N-01	1SAE231111M0131		0.245	6
		230...240	519697	ESB25-31N-06	1SAE231111M0631		0.235	6
	2	24	519376	ESB25-13N-01	1SAE231111M0113		0.245	6
		230...240	519659	ESB25-13N-06	1SAE231111M0613		0.235	6

(1) In number of modular spacings.
(2) Other control voltages: see voltage code table and contact ABB for availability of products.

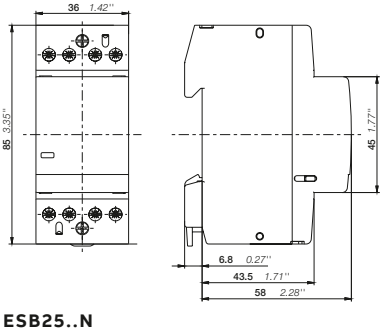

ESB25..N

Dimensions mm, inches

Command and signaling

Installation contactors

Ordering details ESB40..N - 40 A, AC-1/AC-7a, AC/DC operated

ESB40..N

The ESB40..N installation contactors are used to control single and three-phases loads up to 40 A and can be operated by AC or DC voltages. These contactors are made for use in household applications as well as in industrial environment.
ESB40..N series is providing the following benefits:

- Hum-free operation, low power consumption and integrated overvoltage protection.
- Various contact combinations and accessories are available.

Main contacts	Width[1]	Rated control circuit voltage[2]	Bbn 4013614	Order details		Price 1 piece	Weight 1 piece	Pack unit
		V AC/DC	EAN	Type code	Order code		kg	pc.
Single packaging								
	3	24	524639	ESB40-40N-01	1SAE341111R0140		0.405	1
		230	524820	ESB40-40N-06	1SAE341111R0640		0.405	1
	3	24	524608	ESB40-22N-01	1SAE341111R0122		0.405	1
		230	524790	ESB40-22N-06	1SAE341111R0622		0.405	1
	3	24	524622	ESB40-31N-01	1SAE341111R0131		0.405	1
		230	524813	ESB40-31N-06	1SAE341111R0631		0.405	1
	3	24	524615	ESB40-30N-01	1SAE341111R0130		0.385	1
		230	524806	ESB40-30N-06	1SAE341111R0630		0.385	1
	3	24	524592	ESB40-20N-01	1SAE341111R0120		0.370	1
		230	524783	ESB40-20N-06	1SAE341111R0620		0.370	1
Multiple packaging								
	3	24	520075	ESB40-40N-01	1SAE341111M0140		0.405	4
		230	520266	ESB40-40N-06	1SAE341111M0640		0.405	4
	3	24	520044	ESB40-22N-01	1SAE341111M0122		0.405	4
		230	520235	ESB40-22N-06	1SAE341111M0622		0.405	4
	3	24	520068	ESB40-31N-01	1SAE341111M0131		0.405	4
		230	520259	ESB40-31N-06	1SAE341111M0631		0.405	4
	3	24	520051	ESB40-30N-01	1SAE341111M0130		0.385	4
		230	520242	ESB40-30N-06	1SAE341111M0630		0.385	4
	3	24	520037	ESB40-20N-01	1SAE341111M0120		0.370	4
		230	520228	ESB40-20N-06	1SAE341111M0620		0.370	4

(1) In number of modular spacings.
(2) Other control voltages: see voltage code table and contact ABB for availability of products.

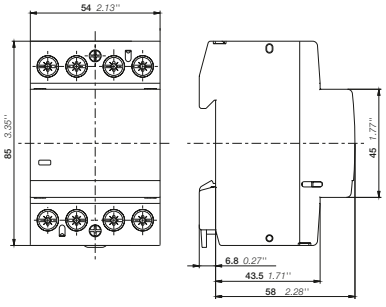

ESB40..N

Dimensions mm, inches

Command and signaling

Installation contactors

Ordering details ESB63..N - 63 A, AC-1/AC-7a, AC/DC operated

ESB63..N

The ESB63..N installation contactors are used to control single and three-phases loads up to 63 A and can be operated by AC or DC voltages. These contactors are made for use in household applications as well as in industrial environment.
ESB63..N series is providing the following benefits:

- Hum-free operation, low power consumption and integrated overvoltage protection.
- Various contact combinations and accessories are available.

Main contacts	Width[1]	Rated control circuit voltage[2]	Bbn 4013614	Order details		Price 1 piece	Weight 1 piece	Pack unit
		V AC/DC	EAN	Type code	Order code		kg	pc.
Single packaging								
	3	24	525278	ESB63-40N-01	1SAE351111R0140		0.405	1
		230	525544	ESB63-40N-06	1SAE351111R0640		0.405	1
	3	230	525537	ESB63-31N-06	1SAE351111R0631		0.405	1
	3	230	525520	ESB63-30N-06	1SAE351111R0630		0.385	1
	3	24	525247	ESB63-20N-01	1SAE351111R0120		0.37	1
		230	525506	ESB63-20N-06	1SAE351111R0620		0.37	1
Multiple packaging								
	3	24	520716	ESB63-40N-01	1SAE351111M0140		0.405	4
		230	520983	ESB63-40N-06	1SAE351111M0640		0.405	4
	3	230	520976	ESB63-31N-06	1SAE351111M0631		0.405	4
	3	230	520969	ESB63-30N-06	1SAE351111M0630		0.385	4
	3	24	520686	ESB63-20N-01	1SAE351111M0120		0.37	4
		230	520945	ESB63-20N-06	1SAE351111M0620		0.37	4

(1) In number of modular spacings.
(2) Other control voltages: see voltage code table and contact ABB for availability of products.

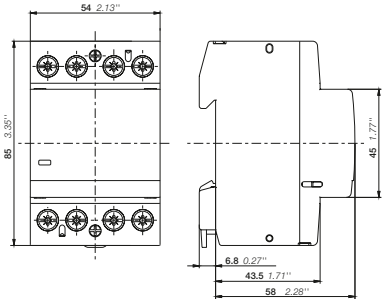

ESB63..N

Dimensions mm, inches

Command and signaling

Installation contactors

Ordering details ESB100..N - 100 A, AC-1/AC-7a, AC/DC operated

ESB100-20N

ESB100-40N

The ESB100..N installation contactors are used to control single and three-phases loads up to 100 A and can be operated by AC or DC voltages. These contactors are made for use in household applications as well as in industrial environment.
ESB100..N series is providing the following benefits:

- Hum-free operation, low power consumption and integrated overvoltage protection.
- Various contact combinations and accessories are available.

Main contacts	Width (1)	Rated control circuit voltage	Bbn 4013614	Order details		Price 1 piece	Weight 1 piece	Pack unit
		V AC/DC	EAN	Type code	Order code		kg	pc.
Single packaging								
	6	24	533112	ESB100-40N-01	1SAE661111R0140		0.405	1
		230	533211	ESB100-40N-06	1SAE661111R0640		0.405	1
	3	24	533013	ESB100-20N-01	1SAE361111R0120		0.81	1
		230	533037	ESB100-20N-06	1SAE361111R0620		0.81	1
Multiple packaging								
	3	24	533235	ESB100-20N-01	1SAE361111M0120		1.62	2
		230	533259	ESB100-20N-06	1SAE361111M0620		1.62	2

(1) In number of modular spacings.

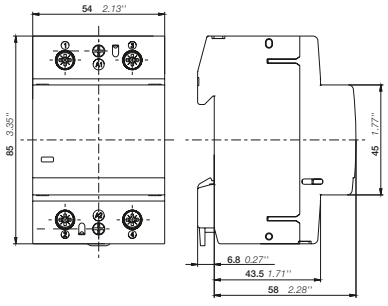

ESB100-20N

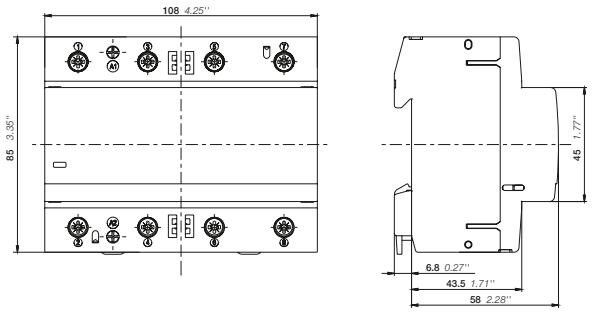

ESB100-40N

Dimensions mm, inches

Command and signaling

Installation contactors

Ordering details EN20N -20 A, manually/automatic operated

EN20..N

The EN20..N installation contactors are used to control single-phase loads up to 20 A and can be operated by AC or DC voltages. They have a built-in toggle switch to be operated manually or automatically. These contactors are made for use in household applications as well as in industrial environment.

EN20..N series is providing the following benefits:

- Hum-free operation, low power consumption and integrated overvoltage protection and manual override.
- Various contact combinations and accessories are available.

Main contacts	Width[1]	Rated control circuit voltage [1]	Bbn 3471523	Order details		Price 1 piece	Weight 1 piece	Pack unit
		V AC/DC	EAN	Type code	Order code		kg	pc.
Single packaging								
	1	24	004689	EN20-20N-01	1SBE122111R0120		0.14	1
		230	004696	EN20-20N-06	1SBE122111R0620		0.14	1
Multiple packaging								
	1	24	005426	EN20-20N-01	1SBE122111M0120		0.14	12
		230	005433	EN20-20N-06	1SBE122111M0620		0.14	12

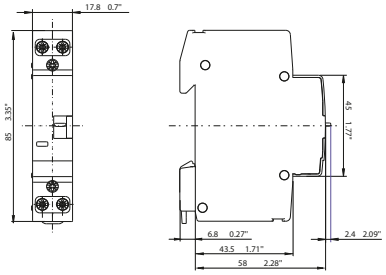

EN20..N

Dimensions mm, inches

Command and signaling

Installation contactors

Ordering details EN25..N, manually/automatic operated

EN25..N

The EN25..N installation contactors are used to control single- and three-phase loads up to 25 A and can be operated by AC or DC voltages. They have a built-in toggle switch to be operated manually or automatically. These contactors are made for use in household applications as well as in industrial environment.

EN25..N series is providing the following benefits:

- Hum-free operation, low power consumption and integrated overvoltage protection and manual override.
- Various contact combinations and accessories are available.

Main contacts	Width[1]	Rated control circuit voltage	Bbn 4013614	Order details		Price 1 piece	Weight 1 piece	Pack unit
		V AC/DC	EAN	Type code	Order code		kg	pc.
Single packaging								
	2	24	524431	EN25- 40N- 01	1SAE232111R0140		0.250	1
		230 ... 240	524554	EN25-40N-06	1SAE232111R0640		0.240	1
	2	24	524424	EN25-31N-01	1SAE232111R0131		0.250	1
		230 ... 240	524547	EN25-31N-06	1SAE232111R0631		0.240	1
	2	230 ... 240	524530	EN25-30N-06	1SAE232111R0630		0.235	1
Multiple packaging								
	2	24	519871	EN25-40N-01	1SAE232111M0140		0.250	6
		230 ... 240	519994	EN25-40N-06	1SAE232111M0640		0.240	6
	2	24	519864	EN25-31N-01	1SAE232111M0131		0.250	6
		230 ... 240	519987	EN25-31N-06	1SAE232111M0631		0.240	6
	2	230 ... 240	519970	EN25-30N-06	1SAE232111M0630		0.235	6

(1) In number of modular spacings.

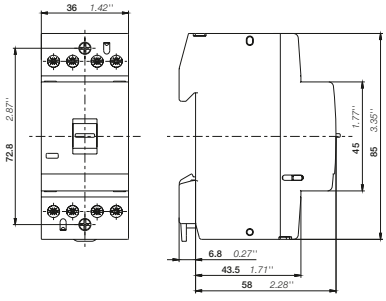

EN25..N

Dimensions mm, inches

Command and signaling

Installation contactors

Ordering details EN40..N, manually/automatic operated

EN40..N

The EN40..N installation contactors are used to control single- and three-phase loads up to 40 A and can be operated by AC or DC voltages. They have a built-in toggle switch to be operated manually or automatically. These contactors are made for use in household applications as well as in industrial environment.

EN40..N series is providing the following benefits:

- Hum-free operation, low power consumption and integrated overvoltage protection and manual override.
- Various contact combinations and accessories are available.

Main contacts	Width[1]	Rated control circuit voltage[2]	Bbn 4013614	Order details		Price 1 piece	Weight 1 piece	Pack unit
		V AC/DC	EAN	Type code	Order code		kg	pc.
Single packaging								
	3	24	524943	EN40-40N-01	1SAE342111R0140		0.410	1
		230	525148	EN40-40N-06	1SAE342111R0640		0.410	1
	3	24	524936	EN40-31N-01	1SAE342111R0131		0.410	1
		230	525131	EN40-31N-06	1SAE342111R0631		0.410	1
	3	230	525124	EN40-30N-06	1SAE342111R0630		0.410	1
	3	230	525117	EN40-20N-06	1SAE342111R0620		0.375	1
Multiple packaging								
	3	24	520389	EN40-40N-01	1SAE342111M0140		0.410	4
		230	520587	EN40-40N-06	1SAE342111M0640		0.410	4
	3	24	520372	EN40-31N-01	1SAE342111M0131		0.410	4
		230	520570	EN40-31N-06	1SAE342111M0631		0.410	4
	3	230	520563	EN40-30N-06	1SAE342111M0630		0.410	4
	3	230	520556	EN40-20N-06	1SAE342111M0620		0.375	4

(1) In number of modular spacings.
(2) Other control voltages: see voltage code table and contact ABB for availability of products.

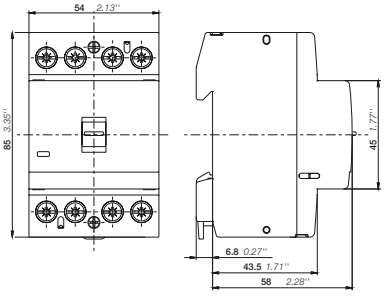

EN40..N

Dimensions mm, inches

Command and signaling

Installation contactors

Ordering details installation contactors accessories

EH04-20N

Auxiliary contact blocks

Suitable for	Auxiliary contacts	Bbn 4013614	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
Single packaging							
ESB16..N, ESB20..N, ESB25..N, ESB40..N, ESB63..N, ESB100..N, EN20..N, EN25..N, EN40..N		527814	EH04-11N	1SAE901901R1011		0.040	1
		527821	EH04-20N	1SAE901901R1020		0.040	1
Multiple packaging							
ESB16..N, ESB20..N, ESB25..N, ESB40..N, ESB63..N, ESB100..N, EN20..N, EN25..N, EN40..N		528019	EH04-11N	1SAE901901M1011		0.040	6
		528026	EH04-20N	1SAE901901M1020		0.040	6

Accessories

Suitable for	Description	Bbn 4013614	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
Sealing covers							
ESB25..N, EN25..N	sealing cover	420221	ESB-PLK24	GHE3201903R0001		0.002	10
ESB40..N, ESB63..N, EN40..N	sealing cover	420931	ESB-PLK40/63	GHE3401903R0001		0.003	10
Distance piece							
ESB25..N, ESB40..N, ESB63..N, EN25..N, EN40..N	distance piece	420207	ESB-DIS[1)]	GHE3201902R0001		0.002	10

1) If several contactors are mounted adjacently and the duty time is longer than one hour, every second contactor needs a distance piece, Type ESB-DIS (1/2 module). This is not necessary at an ambient temperature ≤ 40 °C or on Type ESB16..N, ESB/EN20..N and ESB100..N.

ESB-PLK24

ESB-DIS

ESB-SPK40/63

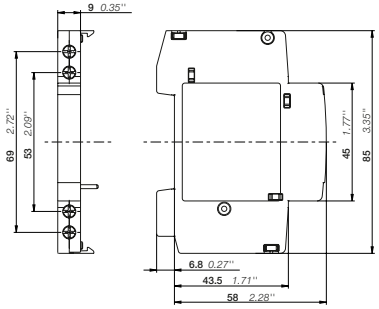

EH04..N

Dimensions mm, inches

Command and signaling

E260 Electronic latching relay

E260

The E260 series is designed for direct installation in sub-distribution systems. Due to the quite switching operation, the devices do not need to be heavily noise-insulated but can be installed easily and without hesitation.Particularly suitable for households, hotels, workplaces or areas where people want to be undisturbed and sub-distribution system are nearby.The basic version is designed for the most common voltages and has up to two switching contacts. In addition, there is a device with a central command on-off built in.The E260 series has the capability to switch LED loads of up to 200W. Each unit can be used with a universal input voltage anywhere from 8 up to 240V AC/DC, which is unique and enable a flexible use in any application. A wide range of state-of-the-art product features combined in only few stock selling units allows the customer to use them in various applications like fan, lighting and AC systems - Especially in residential and commercial sectors.

Rated current = 16 A

Contact config.	Power loss	Width [mm]	Coil control voltage	Bbn 7612271	Order details		Price 1 piece	Weight 1 piece	Pack unit
	[W]		VAC/VDC	EAN	Type code	Order code		kg	pc.
Electronic latching relay									
1NO	1.2	18	8 ... 240	514808	**E260-16-10**	2CCG000981R0001		0,066	1
2NO	2.4	18	8 ... 240	514716	**E260-16-20**	2CCG000972R0001		0,081	1
Electronic latching relay with central ON-OFF control									
1NO	1.2	18	8 ... 240	514723	**E260C-16-10**	2CCG000973R0001		0,064	1
2NO	2.4	18	8 ... 240	514730	**E260C-16-20**	2CCG000974R0001		0,079	1
Electronic latching relay with adjustable central ON-OFF control									
1NO	1.2	18	8 ... 240	514747	**E260CA-16-10**	2CCG000975R0001		0,068	1
2NO	2.4	18	8 ... 240	514754	**E260CA-16-20**	2CCG000976R0001		0,081	1
1NO+1NC	1.2	18	8 ... 240	514761	**E260CA-16-11**	2CCG000977R0001		0,081	1
4NO	4.8	36	8 ... 240	514778	**E260CA-16-40**	2CCG000978R0001		0,155	1

Command and signaling

E260 Electronic latching relay

E260

E260 Electronic latching relay

Technical features				
	E260-16-10	E260C-16-10	E260CA-16-10	E260CA-16-40
	E260-16-20	E260C-16-20	E260CA-16-20	
			E260CA-16-11	
	E260-16-..	**E260C-16-..**	**E260CA-16-..**	**E260CA-16-40**
Contacts // Power circuit // Main Circuit				
Rated current In	16 A			
Rated voltage Un	250 VAC			
Frequency	50-60 Hz			
Supply voltage	8 … 240V AC/DC			
Contact configuration	1NO; 2NO	1NO; 2NO	1NO; 2NO; 1NO + 1NC	4NO
Potential free contacts	yes			
Breaking capacity	4000 VA			
Electronics // Control circuit				
Relay type	bistable relay			
Universal control voltage	8 .. 240 V UC			
Control voltage AC	8 .. 240 VAC			
Control voltage DC	8 .. 240 VDC			
Max. input power during switching for universal voltage	2 VA / 0.8 W	2 VA / 0.8 W	2.6 VA / 1.1 W	2.5 VA / 0.8 W
Min. control impuls lenght	200 ms			
Recovery time	max. 300 ms		max. 200 ms	
Integrated Glow lamp	yes	-	yes	-
Glow lamp current at the control input 230 V	6 mA	-	15 mA	-
Max. input power during switching at the control input 230 V	5.5 VA / 0.8 W	-	0.6 VA / 0.26 W	-
Lamp load / lamp types				
Incandescent and halogen lamps (230V)	4000 W, Ipeak < 70A for 10ms			
LED lamps	200 W (230 V), 100 W (110 V), Ipeak < 70A for 10ms			
Compact Lamps with Integrated ECG	500 VA, Ipeak < 70A for 10ms			
Halogen lamps	1000 VA, Ipeak < 70A for 10ms			
Mechanical data				
Endurance (switching cycles)	Electrical endurance: 50.000 (16A/250V, AC1, 85°C) Mechanical endurance: 5x106			
Life at rated load, cos(phi)=1	>5x104			
Conductor cross-section (solid)	load: 1x4 mm2, control: 1x2.5 mm2			
Two conductor of same cross-section (solid)	load: 2x2.5 mm2, control: 2x1.5 mm2			
Tightening torque	load: 0.5 Nm, control: 0.4 Nm			
Stripping lenght	load: 6.5 mm, control: 6 mm			
Screwdriver	PH1			
Mounting	Mounting rail according to EN 60715-35x7.5			
Mounting position	any			
General data				
Overall width	1 module (18 mm)	1 module (18 mm)	1 module (18 mm)	2 module (36 mm)
Color	light grey, RAL 7035			
Central ON/OFF	-	yes	yes	yes
Group Control	-	-	-	yes
Contact position indication with LED	-	-	yes	yes
Switching Noise (distance 1 m)	55dB	55dB	55dB	57dB
Ambient temperature (operation)	–20 … +55 °C			
Storage temperature	–30 … +70 °C			
Protection degree	IP20			
Polution degree	2			
Overvoltage category	III			
Standards	IEC 60669-1; IEC 60669-2-1			
Approvals	VDE			
Width	18 mm			35 mm
Depth	64 mm			65 mm
Height	90 mm			

Command and signaling

E290 Mechanical latching relay

E290

E290 Latching Relay

General				
Overall depth		68 mm		
Overall width		1 module (18 mm)		
Color		grey, RAL 7035		
Climate resistance in accordance with		IEC 60068-2-2 (dry heat)		
		IEC 60068-2-30 (humid heat)		
		IEC 60068-2-1 (low temperature)		
Ambient temperature		-25°C to +55°C		
Storage temperature		-40°C to +70°C		
Contact system		Double interruption		
Tightening torque		1.2 - 1.5 Nm		
Weight		0.122 kg		
Standards	50 Hz	IEC/EN 60669-1; IEC/EN 60669-2-2		
	60 Hz	IEC 60669-1; IEC 60669-2-2		
Approvals	50 Hz	VDE		
	60 Hz	RINA		
Power Circuit				
Rated Current I_n				
E290-16-.../...		16 A		–
E290-32-.../...		–		32 A
Rated voltage U_n		250 VAC		250 VAC
Frequency		50/60 Hz		50/60 Hz
Short circuit withstand capacity I_{nc}		3 kA		3 kA
Back-up fuses (gL)		max. 16 A		max. 32 A
Latching Relay contact configurations for 16 A and 32 A Additional power contacts for 16 A (attachable) (not for 32 A version)			1NO; 2NO; 1NO + 1NC 1CO; 2NO; 1NO + 1NC	
Max. DC current per contact with 24 VDC		5 A		8 A
Bounce time	50 Hz		< 3 ms	
	60 Hz		< 6 ms	
Power loss in W per contact		0.32 W		1.2 W
Rated impulse withstand voltage U_{imp}			4 kV	
Max. lamp load				
Glow lamps (20 W - 200 W)		3000 W		4000 W
Flourescent lamps, uncorrected power factor (cos. 0.5)		1800 W		2200 W
Flourescent lamps, corrected power factor (cos. 0.9)				
serial		3000 W		4000 W
parallel		2500 W		3200 W
single		1800 W		2200 W
double		2500 W		3200 W
(Please refer to the lamp load table in technical details)				

Command and signaling

E290 Mechanical latching relay

E290

E290 Latching Relay

Lifetime (switching cycles)								
Electrical (AC1 rated current load)								
E290 16A		150.000						
E290 32A		50.000						
Mechanical E290 16A & 32A		250.000						
Connector cross-sections								
Connecting terminals		solid from 1x1 mm² to 1x10 mm² or 2x2.5 mm² flexible from 1x0.75 mm² to 1x16 mm² (Cu) with end ferrule or pin cable lug						
Control Circuit								
Rated control voltages U_n								
	AC:	8 V;	12 V;	24 V;	48 V;	115 V;	230 V	
	DC:	– ;	– ;	12 V*;	24 V;	60 V*;	110 V*	* for 50 Hz devices only
AC/DC ratio [1]		1: 0.5 (not available for 8 VAC and 12 VAC coils)						
Operation limits		+/- 10% = 0.9 - 1.1 x U_n						
Minimum command duration		50 ms						
Max. switching operations		15 x per min. at I_n 16 A; 8 x per min. at I_n 32 A						
Switching Noise (distance 1 m)		70 dB						
Max. number of illuminated buttons (0.6 mA)		(refer to the table on page 30 for technical details on command and signaling)						
Max. glow lamp current parallel to the 230 V control buttons		5 mA						

Coil Consumption – E290 Latching Relay

Product type	Control voltage V AC	Coil consumption average pull-in current A	Control voltage V DC	Coil consumption average pull-in current A
E290				
	230	0.062	110*	0.057*
	115	0.070	60*	0.105*
	48	0.212	24	0.207
	24	0.434	12*	0.558*
	12	1.263	–	–
	8	2.048	–	–
E291S*				
	230	0.051	110	0.047
	24	0.378	12	0.355
	12	0.803	–	–
	8	1.088	–	–
E294				
	230	0.120	–	–
	24	0.684	–	–

1) Coil supply voltage: All E290 50Hz devices can be supplied with AC or DC control voltage.
The ratio of 1 : 0.5 applies, i.e. a 230 VAC coil can also be used for 110 VDC. (See Ordering data.)

NO = normally-open contact; NC = normally-closed contact; CO = changeover contact

* for 50 Hz devices only

Command and signaling

E290 Mechanical latching relay

Switching components for E290

E292-16-... Contact Module (attachable only to 16 A I_n version)		
Rated current I_n per E292 contact		16 A
Rated voltage U_n		250 VAC
Frequency		50/60 Hz
Max. no. attachable (additional main contacts)		1 unit (attachable on the right side of the main module)
Contact configurations		1CO; 2NO; 1NO+1NC
Max. DC current per contact with 24 VDC		8 A
Min. switching load (for 50 Hz devices only)		24 V; 10 mA
E299-... Auxiliary Contacts		
Max. no. attachable (signaling or control contacts)		1 unit (attachable on the right side of the main module)
Number of contacts		1 NO + 1 NC; 2 NO
Min. switching load		24 V, 10 mA
Max. current per contact with AC		5.0 A
Max. current per contact with 24 VDC		5.0 A

Control components for E290

E294 Central On-Off Control Module (different control voltage potential)		
Max. no. attachable		1 unit (attachable on the left side of the main module)
Rated current I_n max.		1 A
Rated voltage U_n		250 VAC
E295-PS Permanent Signal Module		
Max. no. attachable		1 unit (attachable on the left side of the main module)
Rated current I_n max.		1 A
Rated voltage U_n		250 VAC
E295-GM Group Module		
Use of group switching modules		1 unit per defined group
Rated current I_n max.		1 A
Rated voltage U_n		250 VAC
E296-CP Compensator		
Compensation when using illuminated buttons		Wiring parallel to the main module
Compensation	50 Hz	2.2 uF
	60 Hz	2.2 uF
Rated voltage U_n	50 Hz	250 VAC
	60 Hz	310 VAC

NO = normally-open contact; NC = normally-closed contact; CO = changeover contact

Command and signaling

E290 Mechanical latching relay

E290

Latching Relay

This 18 mm wide DIN rail mounted device is designed for direct installation in main distribution or sub-distribution systems (mounted on 35 mm DIN mounting rails). The devices are activated by means of control pulses and guarantee energy-optimized lighting control. As a rule, installations with latching relays are used where the lighting control system can be operated from at least three points in different locations. Those latching relays are designed for a rated current of 16 A or 32 A.

Standard number of contacts:
1 NO contact, 2 NO contacts or 1 NO contact + 1 NC contact

The number of switching contacts can be increased by a maximum of two main contacts using a snap-on main module (E292-..-..). As a result, up to four lighting sets can be switched by a single device.
A signaling and/or indicating facility can be created using the additional snap-on auxiliary contact module (E299-11).
The various standard AC/DC coil voltages complete the comprehensive and interesting product range. The additional devices can be snapped onto the latching relay on the left or right side.

Rated current = 16 A

Contact config.	Power loss	Width [mm]	Coil control voltage	Bbn 7612270	Order details		Price 1 piece	Weight	Pack unit
	[W]		[VAC/VDC]	EAN	Type code	Order code		kg.	pc.
1NO	0.32	18	8VAC	939558	E290-16-10/8	2TAZ312000R2061		0.114	10
	0.32	18	12VAC	939565	E290-16-10/12	2TAZ312000R2051		0.114	10
	0.32	18	24VAC/12VDC	939572	E290-16-10/24	2TAZ312000R2041		0.114	10
	0.32	18	48VAC/24VDC	939589	E290-16-10/48	2TAZ312000R2031		0.114	10
	0.32	18	115VAC/60VDC	939596	E290-16-10/115	2TAZ312000R2021		0.114	10
	0.32	18	230VAC/110VDC	939602	E290-16-10/230	2TAZ312000R2011		0.114	10

Rated current = 32 A

Contact config.	Power loss	Width [mm]	Coil control voltage	Bbn 7612270	Order details		Price 1 piece	Weight	Pack unit
	[W]		[VAC/VDC]	EAN	Type code	Order code		kg.	pc.
1NO	1.20	18	8VAC	939619	E290-32-10/8	2TAZ322000R2061		0.114	10
	1.20	18	12VAC	939626	E290-32-10/12	2TAZ322000R2051		0.114	10
	1.20	18	24VAC/12VDC	939633	E290-32-10/24	2TAZ322000R2041		0.114	10
	1.20	18	48VAC/24VDC	939640	E290-32-10/48	2TAZ322000R2031		0.114	10
	1.20	18	115VAC/60VDC	939657	E290-32-10/115	2TAZ322000R2021		0.114	10
	1.20	18	230VAC/110VDC	939664	E290-32-10/230	2TAZ322000R2011		0.114	10

Rated current = 16 A

Contact config.	Power loss	Width [mm]	Coil control voltage	Bbn 7612270	Order details		Price 1 piece	Weight	Pack unit
	[W]		[VAC/VDC]	EAN	Type code	Order code		kg.	pc.
2NO	0.64	18	8VAC	939671	E290-16-20/8	2TAZ312000R2062		0.122	10
	0.64	18	12VAC	939688	E290-16-20/12	2TAZ312000R2052		0.122	10
	0.64	18	24VAC/12VDC	939695	E290-16-20/24	2TAZ312000R2042		0.122	10
	0.64	18	48VAC/24VDC	939701	E290-16-20/48	2TAZ312000R2032		0.122	10
	0.64	18	115VAC/60VDC	939718	E290-16-20/115	2TAZ312000R2022		0.122	10
	0.64	18	230VAC/110VDC	939725	E290-16-20/230	2TAZ312000R2012		0.122	10

NO = normally-open contact; NC = normally-closed contact; CO = changeover contact

Command and signaling

E290 Mechanical latching relay

E290

Contact config.	Power loss [W]	Width [mm]	Coil control voltage [VAC/VDC]	Bbn 7612270 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight kg.	Pack unit pc.
Rated current = 32 A									
2NO	2.40	18	8VAC	939732	E290-32-20/8	2TAZ322000R2062		0.122	10
	2.40	18	12VAC	939749	E290-32-20/12	2TAZ322000R2052		0.122	10
	2.40	18	24VAC/12VDC	939756	E290-32-20/24	2TAZ322000R2042		0.122	10
	2.40	18	48VAC/24VDC	939763	E290-32-20/48	2TAZ322000R2032		0.122	10
	2.40	18	115VAC/60VDC	939770	E290-32-20/115	2TAZ322000R2022		0.122	10
	2.40	18	230VAC/110VDC	939787	E290-32-20/230	2TAZ322000R2012		0.122	10
Rated current = 16 A									
1NO+1NC	0.50	18	8VAC	939794	E290-16-11/8	2TAZ312000R2063		0.122	10
	0.50	18	12VAC	939800	E290-16-11/12	2TAZ312000R2053		0.122	10
	0.50	18	24VAC/12VDC	939817	E290-16-11/24	2TAZ312000R2043		0.122	10
	0.50	18	48VAC/24VDC	939824	E290-16-11/48	2TAZ312000R2033		0.122	10
	0.50	18	115VAC/60VDC	939831	E290-16-11/115	2TAZ312000R2023		0.122	10
	0.50	18	230VAC/110VDC	939848	E290-16-11/230	2TAZ312000R2013		0.122	10
Rated current = 32 A									
1NO+1NC	1.20	18	8VAC	939855	E290-32-11/8	2TAZ322000R2063		0.122	10
	1.20	18	12VAC	939862	E290-32-11/12	2TAZ322000R2053		0.122	10
	1.20	18	24VAC/12VDC	939879	E290-32-11/24	2TAZ322000R2043		0.122	10
	1.20	18	48VAC/24VDC	939886	E290-32-11/48	2TAZ322000R2033		0.122	10
	1.20	18	115VAC/60VDC	939893	E290-32-11/115	2TAZ322000R2023		0.122	10
	1.20	18	230VAC/110VDC	939909	E290-32-11/230	2TAZ322000R2013		0.122	10

NO = normally-open contact; NC = normally-closed contact; CO = changeover contact

Command and signaling

E290 Mechanical latching relay

E291S

E292

E294

E295

E299

Sequential Latching Relay

The sequential latching relay is an 18 mm wide device which has two NO contacts. The preset switching sequence for the main contacts enables the switching on and off, of different lighting sets to be „programmed“. The E291S has an easily visible switch position display on the front.

Rated current = 16 A									
Contact config.	Power loss	Width [mm]	Coil control voltage	Bbn 7612270	Order details		Price 1 piece	Weight	Pack unit
	[W]		[VAC/VDC]	EAN	Type code	Order code		kg.	pc.
2NO	0.64	18	8VAC	939919	E291S-16-20/8	2TAZ313000R2062		0.110	10
	0.64	18	12VAC	939923	E291S-16-20/12	2TAZ313000R2052		0.110	10
	0.64	18	24VAC/12VDC	939930	E291S-16-20/24	2TAZ313000R2042		0.110	10
	0.64	18	230VAC/110VDC	939947	E291S-16-20/230	2TAZ313000R2012		0.110	10

Accessories for E290 Latching Relays

Accessories and additional devices for combinations with Latching Relays

Main Contact Module

Rated current = 16 A									
Contact config.	Power loss	Width [mm]	Coil control voltage	Bbn 7612270	Order details		Price 1 piece	Weight	Pack unit
	[W]		[VAC/VDC]	EAN	Type code	Order code		kg.	pc.
2NO	0.64	9		939480	E292-16-20	2CCA704300R0001		0.045	10
1NO+1NC	0.32	9		939503	E292-16-11	2CCA704301R0001		0.045	10
1CO	0.32	9		939527	E292-16-001	2CCA704302R0001		0.045	10

Central On-Off Control Module (with different control voltages)

		18	24VAC	939411	E294/24	2TAZ312001R2043	0.110	5
		18	230VAC	939442	E294/230	2TAZ312001R2013	0.110	5

Permanent Signal Module

		18		939459	E295-PS	2TAZ312005R1003	0.041	10

Group Module

		18		939466	E295-GM	2TAZ310002R1000	0.059	10

Compensator

		18		939473	E296-CP	2TAZ310003R1000	0.055	10

Auxiliary Contact for Latching and Installation relays

Rated current = 5 A								
1NO+1NC	0.10	9	250VAC	939985	E299-11	2CCA704340R0001	0.045	10
2NO	0.10	9	250VAC	465346*	E299-20	2CCA704341R0001	0.045	10

* with Bbn 7612271

Intermediate piece (for heating dissipation - bag contains 5 items)

		18		100989	ZLS725	2CCS500900R0181	0.100	1 bag
		9		104703	ZLS726	2CCS400900R0091	0.070	1 bag

Command and signaling

E290 60Hz Mechanical latching relay – Ordering data

Standard devices – E290 60 Hz Latching Relay

Cont. config.	Rated Voltage	Power loss	Width	Coil control voltage	Order details		Bbn 7612271	Weight per unit	Pack. unit
	VAC	W	mm	VAC/VDC	Type code	Order code	EAN	kg	units
Rated current = 16 A									
1NO	250	0.32	18	230VAC	E290-16-10/230-60	2TAZ352000R2011	503901	0.111	10
1NO	250	0.32	18	115VAC	E290-16-10/115-60	2TAZ352000R2021	504328	0.111	10
1NO	250	0.32	18	48VAC	E290-16-10/48-60	2TAZ352000R2031	504359	0.111	10
1NO	250	0.32	18	24VAC	E290-16-10/24-60	2TAZ352000R2041	504380	0.111	10
1NO	250	0.32	18	24VDC	E290-16-10/24DC	2TAZ352000R2071	504472	0.111	10
1NO	250	0.32	18	12VAC	E290-16-10/12-60	2TAZ352000R2051	504410	0.111	10
1NO	250	0.32	18	8VAC	E290-16-10/8-60	2TAZ352000R2061	504441	0.111	10
2NO	250	0.64	18	230VAC	E290-16-20/230-60	2TAZ352000R2012	503918	0.122	10
2NO	250	0.64	18	115VAC	E290-16-20/115-60	2TAZ352000R2022	504335	0.122	10
2NO	250	0.64	18	48VAC	E290-16-20/48-60	2TAZ352000R2032	504366	0.122	10
2NO	250	0.64	18	24VAC	E290-16-20/24-60	2TAZ352000R2042	504397	0.122	10
2NO	250	0.64	18	24VDC	E290-16-20/24DC	2TAZ352000R2072	504489	0.122	10
2NO	250	0.64	18	12VAC	E290-16-20/12-60	2TAZ352000R2052	504427	0.122	10
2NO	250	0.64	18	8VAC	E290-16-20/8-60	2TAZ352000R2062	504458	0.122	10
1NO+1NC	250	0.50	18	230VAC	E290-16-11/230-60	2TAZ352000R2013	504311	0.121	10
1NO+1NC	250	0.50	18	115VAC	E290-16-11/115-60	2TAZ352000R2023	504342	0.121	10
1NO+1NC	250	0.50	18	48VAC	E290-16-11/48-60	2TAZ352000R2033	504373	0.121	10
1NO+1NC	250	0.50	18	24VAC	E290-16-11/24-60	2TAZ352000R2043	504403	0.121	10
1NO+1NC	250	0.50	18	24VDC	E290-16-11/24DC	2TAZ352000R2073	504496	0.121	10
1NO+1NC	250	0.50	18	12VAC	E290-16-11/12-60	2TAZ352000R2053	504434	0.121	10
1NO+1NC	250	0.50	18	8VAC	E290-16-11/8-60	2TAZ352000R2063	504465	0.121	10
Rated current = 32 A									
1NO	250	1.20	18	230VAC	E290-32-10/230-60	2TAZ362000R2011	504502	0.111	10
1NO	250	1.20	18	115VAC	E290-32-10/115-60	2TAZ362000R2021	504533	0.111	10
1NO	250	1.20	18	48VAC	E290-32-10/48-60	2TAZ362000R2031	504564	0.111	10
1NO	250	1.20	18	24VAC	E290-32-10/24-60	2TAZ362000R2041	504595	0.111	10
1NO	250	1.20	18	12VAC	E290-32-10/12-60	2TAZ362000R2051	504625	0.111	10
1NO	250	1.20	18	8VAC	E290-32-10/8-60	2TAZ362000R2061	504656	0.111	10
2NO	250	2.40	18	230VAC	E290-32-20/230-60	2TAZ362000R2012	504519	0.123	10
2NO	250	2.40	18	115VAC	E290-32-20/115-60	2TAZ362000R2022	504540	0.123	10
2NO	250	2.40	18	48VAC	E290-32-20/48-60	2TAZ362000R2032	504571	0.123	10
2NO	250	2.40	18	24VAC	E290-32-20/24-60	2TAZ362000R2042	504601	0.123	10
2NO	250	2.40	18	12VAC	E290-32-20/12-60	2TAZ362000R2052	504632	0.123	10
2NO	250	2.40	18	8VAC	E290-32-20/8-60	2TAZ362000R2062	504663	0.123	10
1NO+1NC	250	1.20	18	230VAC	E290-32-11/230-60	2TAZ362000R2013	504526	0.121	10
1NO+1NC	250	1.20	18	115VAC	E290-32-11/115-60	2TAZ362000R2023	504557	0.121	10
1NO+1NC	250	1.20	18	48VAC	E290-32-11/48-60	2TAZ362000R2033	504588	0.121	10
1NO+1NC	250	1.20	18	24VAC	E290-32-11/24-60	2TAZ362000R2043	504618	0.121	10
1NO+1NC	250	1.20	18	12VAC	E290-32-11/12-60	2TAZ362000R2053	504649	0.121	10
1NO+1NC	250	1.20	18	8VAC	E290-32-11/8-60	2TAZ362000R2063	504670	0.121	10

Command and signaling

E290 60Hz Mechanical latching relay – Ordering data

Accessories and additional devices for combinations with Latching relays

Cont. config.	Rated Voltage	Power loss	Width	Coil control voltage	Order details		Bbn 7612270	Weight per unit	Pack. unit
	VAC	W	mm	VAC/VDC	Type code	Order code	EAN	kg	units
Main Contact Module (Rated current = 16 A)									
1NO+1NC	250	0.32	9		E292-16-11-60	2CCA704306R0001	503017	0.045	10
2NO	250	0.64	9		E292-16-20-60	2CCA704305R0001	503024	0.045	10
1CO	250	0.32	9		E292-16-001-60	2CCA704307R0001	503000	0.045	10
Central ON-OFF Control Module (with different control voltages)									
			18	230VAC	E294/230-60	2TAZ352001R2013	504687	0.110	5
			18	24VAC	E294/24-60	2TAZ352001R2043	504694	0.109	5
Permanent Signal Module									
			9		E295-PS	2TAZ312005R1003	939459	0.041	10
Group Module									
			18		E295-GM	2TAZ310002R1000	939466	0.059	10
Compensator									
			18		E296-CP	2TAZ310003R1000	939473	0.055	10
Auxiliary Contact for Latching and Installation Relays (Rated current = 5 A)									
1NO+1NC	250	0.10	9		E299-11-60	2CCA704342R0001	503031	0.045	10
2NO	250	0.10	9		E299-20-60	2CCA704343R0001	503048	0.045	10
Intermediate piece (for heating dissipation – bag contains 5 items)									
			18		ZLS725	2CCS500900R0181	100989	0.100	1 bag
			9		ZLS726	2CCS400900R0091	104703	0.070	1 bag

* with Bbn 7612271
NO = normally-open contact; NC = normally-closed contact; CO = changeover contact

Command and signaling

E297 Installation relay

E297

E297 Installation Relays

General		
Overall depth		68 mm
Overall width		1 module (18 mm)
Colour		grey, RAL 7035
Climate resistance in accordance with		IEC 60068-2-2 (dry heat)
		IEC 60068-2-30 (humid heat)
		IEC 60068-2-1 (low temperatures)
Ambient temperature		- 25 °C to + 55 °C
Storage temperature		- 40 °C to + 70 °C
Tightening torque		1.2 - 1.5 Nm
Weight		0.122 kg
Standards		EN 60669-1; EN 60669-2-2
Approval		VDE
Power circuit		
Rated current In		16 A
Rated voltage Un		250 VAC
Frequency		50-60 Hz
Short circuit withstand capacity Inc		3 kA
Back-up fuses (gL)		max. 16 A
Installation relay contact configurations		1NO; 2NO; 1NO+1NC
Additional Power contacts 16A (attachable)		1CO; 2NO; 1NO+1NC
Max. DC current per contact with 24 VDC		8 A
Min. switching load		24 V; 10 mA
Bounce time		< 3 ms
Power loss in W per contact		0.50 W
Rated Impulse withstand voltage Uimp		4 kV
Max. lamp load		
Glow lamps (20 W-200 W)		3000 W
Fluorescent lamps, uncorrected power factor (cos. 0.5)		1800 W
Fluorescent lamps, corrected power factor (cos. 0.9)	serial	3000 W
	parallel	2500 W
	single	1800 W
	double	2500 W
(see also lamp load table)		
Lifetime (switching cycles)		
Electrical (AC1 rated current load)		150.000
Mechanical		250.000

NO = normally-open contact; NC = normally-closed contact; CO = changeover contact

Command and signaling

E297 Installation relay

E297

E297 Installation Relays

Application categories			
Switching capacity in accordance with	AC-1 (based on EN 60947)	16 A	
	AC-5b (based on EN 60947)	5 A	
	AC-7a (based on EN 61095)	16 A	
	AC-7c (based on EN 61095)	5 A	
Connector cross-sections			
Main connecting terminals		solid from 1 x 1 mm2 to 1 x 10 mm2 or 2 x 2.5 mm2	
		flexible from 1 x 0.75 mm2 up to 1 x 6 mm2 (Cu)	
		with end ferrule or pin cable lug	
Control circuit			
Coil rated voltages Un AC/DC		8 VAC; 12 VAC; 24 VAC/24 VDC; 48 VAC/48 VDC;	
		115 VAC/110 VDC; 230 VAC	
AC/DC ratio 3)		1 : 1	
Operation limits		+/- 10 % = 0.9 - 1.1 x Un	
Switching Noise (distance 1 m)		70 dB (A)	
Max. switching operations		15 x per min. at In 16 A	
Coil power loss			
		AC	DC
Pick up		< 2.8 VA	< 2.0 W
Holding		< 2.6 VA	< 1.8 W

Switching components for E297

E298 Contact Module	
Max. no. attachable 2) (additional main contacts)	1 unit (attachable on the right side of the main module)
Rated current In per E298 contact	16 A
Rated voltage Un	250 VAC
Frequency	50 Hz
Number of contacts	1CO; 2NO; 1NO+1NC
Max. DC current per contact with 24 VDC	5 A
Min. switching load	24 V; 10 mA
E299 - ... Auxiliary Contacts	
Max. no. attachable 2) (signaling or control contacts)	1 unit (attachable on the right side of the main module)
Number of contacts	1NO+1NC; 2NO
Max. current per contact with AC	5.0 A
Max. current per contact with 24 VDC	5.0 A

NO = normally-open contact; NC = normally-closed contact; CO = changeover contact
2) See overview of chapter 4

Command and signaling

E297 Installation relay

E297

E297 Installation Relays

The E297 installation relay is an electromechanical switching device controlled by means of a continuous pulse. The coils have a low level of switching noise, are optimized for low power loss and therefore ensure safe and fault-free use in various applications. Either AC or DC control voltage can be applied. The installation relay is designed for a rated current of 16 A.

Standard number of contacts:

1 NO contact, 2 NO contacts or 1 NO contact + 1 NC contact

In addition, the number of main contacts can be increased to four contact lines using the snap-on E298 Main contact module so that three different groups of loads can be switched and controlled safely.

The various AC/DC coil voltages complete the comprehensive and interesting product range. The additional devices can be snapped onto the installation relay on the right side.

Rated current = 16 A

Contact config.	Power loss	Width [mm]	Coil control voltage	Bbn 7612270	Order details		Price 1 piece	Weight	Pack unit
	[W]		[VAC/VDC]	EAN	Type code	Order code		kg.	pc.
1NO	0.50	18	8VAC	940004	E297-16-10/8	2TAZ311000R2061		0.113	10
	0.50	18	12VAC	940011	E297-16-10/12	2TAZ311000R2051		0.113	10
	0.50	18	24VAC/24VDC	940028	E297-16-10/24	2TAZ311000R2041		0.113	10
	0.50	18	48VAC/48VDC	940035	E297-16-10/48	2TAZ311000R2031		0.113	10
	0.50	18	115VAC/110VDC	940042	E297-16-10/115	2TAZ311000R2021		0.113	10
	0.50	18	230VAC	940059	E297-16-10/230	2TAZ311000R2011		0.113	10

Rated current = 16 A

Contact config.	Power loss	Width [mm]	Coil control voltage	Bbn 7612270	Order details		Price 1 piece	Weight	Pack unit
	[W]		[VAC/VDC]	EAN	Type code	Order code		kg.	pc.
1NO+1NC	0.50	18	8VAC	940066	E297-16-11/8	2TAZ311000R2063		0.121	10
	0.50	18	12VAC	940073	E297-16-11/12	2TAZ311000R2053		0.121	10
	0.50	18	24VAC/24VDC	940080	E297-16-11/24	2TAZ311000R2043		0.121	10
	0.50	18	48VAC/48VDC	940097	E297-16-11/48	2TAZ311000R2033		0.121	10
	0.50	18	115VAC/110VDC	940103	E297-16-11/115	2TAZ311000R2023		0.121	10
	0.50	18	230VAC	940110	E297-16-11/230	2TAZ311000R2013		0.121	10

Rated current = 16 A

Contact config.	Power loss	Width [mm]	Coil control voltage	Bbn 7612270	Order details		Price 1 piece	Weight	Pack unit
	[W]		[VAC/VDC]	EAN	Type code	Order code		kg.	pc.
2NO	1.00	18	8VAC	940127	E297-16-20/8	2TAZ311000R2062		0.121	10
	1.00	18	12VAC	940134	E297-16-20/12	2TAZ311000R2052		0.121	10
	1.00	18	24VAC/24VDC	940141	E297-16-20/24	2TAZ311000R2042		0.121	10
	1.00	18	48VAC/48VDC	940158	E297-16-20/48	2TAZ311000R2032		0.121	10
	1.00	18	115VAC/110VDC	940165	E297-16-20/115	2TAZ311000R2022		0.121	10
	1.00	18	230VAC	940172	E297-16-20/230	2TAZ311000R2012		0.121	10

Command and signaling

E297 Installation relay

E298

E299

Accessories for E297 Installation Relays

Accessories and additional devices for combinations with Installation Relays

Main Contact Module 16A

Rated current = 16 A

Contact config.	Power loss [W]	Width [mm]	Coil control voltage [VAC/VDC]	Bbn 7612270 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight kg.	Pack unit pc.
2NO	0.64	9		939961	E298-16-20	2CCA704320R0001		0.045	10
1NO+1NC	0.32	9		939954	E298-16-11	2CCA704321R0001		0.045	10
1CO	0.32	9		939978	E298-16-001	2CCA704322R0001		0.045	10

Contact config.	Power loss [W]	Width [mm]	Coil control voltage [VAC/VDC]	Bbn 7612270 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight kg.	Pack unit pc.
Auxiliary Contact for Latching and Installation relays									
Rated current = 5 A									
1NO+1NC	0.10	9	250VAC	939985	E299-11	2CCA704340R0001		0.045	10
2NO	0.10	9	250VAC	465346*	E299-20	2CCA704341R0001		0.045	10

* with Bbn 7612271

Intermediate piece (for heating dissipation - bag contains 5 items)

	18		100989	ZLS725	2CCS500900R0181		0.100	1 bag
	9		104703	ZLS726	2CCS400900R0091		0.070	1 bag

Command and signaling

The universal Master dimmer for LED retrofit Lamps

Functions at a glance
Touch dimmer with local operation.
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230V tungsten halogen lamps and low-voltage halogen lamps with conventional transformers or electronic transformers and dimmable halogen energy-saving lamps.
Mix operaton of LEDi with conventional loads possible.
With the following functions: memory, snooze, wake-up, children‘s room, central off, cleaning light and time function.
For staircase lighting control with automatic switch-off and warning function according to DIN 18015-2.
Supports the adherence to the energy saving ordinance (EnEV 2014).
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
With light value storage.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Extension unit input for short switching pulses (push-button) and continuous contact (switch/timer).
Extension unit input designed as wide voltage input (8-230 V; AC/DC); galvanic isolation.

Tecnical features	
Max. connected load	2 - 100 W/VA (Retrofit-LED-load).
Max. connected load	10 - 200 W/VA (Non-LED-load).
Rated voltage	230 V~, +10 % / -10 %, 50 Hz - 60 Hz
Ambient temperature	0 °C bis 35 °C
Standards	IEC 60669-2-1, British Standard EN 60669-2-1

	Bbn 4011395	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
	208519	6586-500	6590-0-0191			1

Command & Signalling

Busch-Dimmer®

Busch-Dimmer® [1) 2) 3) 4) 5)]
MDRC, LED, 20-800 W
Touch dimmer with local operation.
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230V tungsten halogen lamps and lowvoltage halogen lamps with conventional transformers or electronic transformers and dimmable halogen energy-saving lamps.
Mix operaton of LEDi with conventional loads possible.
With the following functions: memory, snooze, wake-up, children's room, central off, cleaning light and time function.
For staircase lighting control with automatic switch-off and warning function according to DIN 18015-2.
Supports the adherence to the energy saving ordinance (EnEV 2014).
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
With light value storage.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Extension unit input for short switching pulses (push-button) and continuous contact (switch/timer).
Extension unit input designed as wide voltage input (8-230 V; AC/DC); galvanic isolation.
Nominal voltage: 110 - 230 V, +10% / -10%
Rated frequency: 50 Hz/60 Hz
Nominal power: 20 - 300 W/VA (leading edge control in 230 V~ networks)
Nominal power: 40 - 800 W/VA (trailing edge control in 230 V~ networks)
Nominal power: 20 - 150 W/VA (leading edge control in 110/127 V~ networks)
Nominal power: 40 - 400 W/VA (trailing edge control in 110/127 V~ networks)
Rated voltage: 110 - 230 V, +10 % / -10 %
Temperature range (Device): 0 °C to 35 °C
Module width: 4 MW
IEC 60669-2-1, British Standard EN 60669-2-1

R,L,C LEDi

grey	**STD 6586/14**	2CKA006590A0193	1

[1)] Illumination of the push switch is only possible with N-conductor terminal.
[2)] In case of electronic transformers, 5 % transformer losses.
[3)] In the case of conventional transformers, take ~20% transformer loss into account.
[4)] 1 MW ¤ 18 mm.
[5)] Recommendation: Please use loads and types of one producer..

Command and signaling

Transformers selection table

		Bell transformers for discontinuous use	
Series		TM	TS
Reference standard		IEC EN 61558-2-8	IEC EN 61558-2-8
Classification		Fail safe	Non-inherently short-circuit proof
Thermal protection integrated in secondary			■
Rated power		10, 15, 30, 40 VA	8, 16, 24 VA
Operation		Discontinuous	Discontinuous
Primary circuit voltage ratings		230 V a.c.	230 V a.c.
Secondary circuit characteristics	Double insulation between primary and secondary windings	■	■
	Full power on all outputs		
	SELV secondary (no-load output voltage <50 V a.c.)	■	■
Dimensions		2 modules [10, 15 VA]	2 modules [8, 16 VA]
		3 modules [30, 40 VA]	3 modules [24 VA]

① See page 6/58 for the choice of the protections.

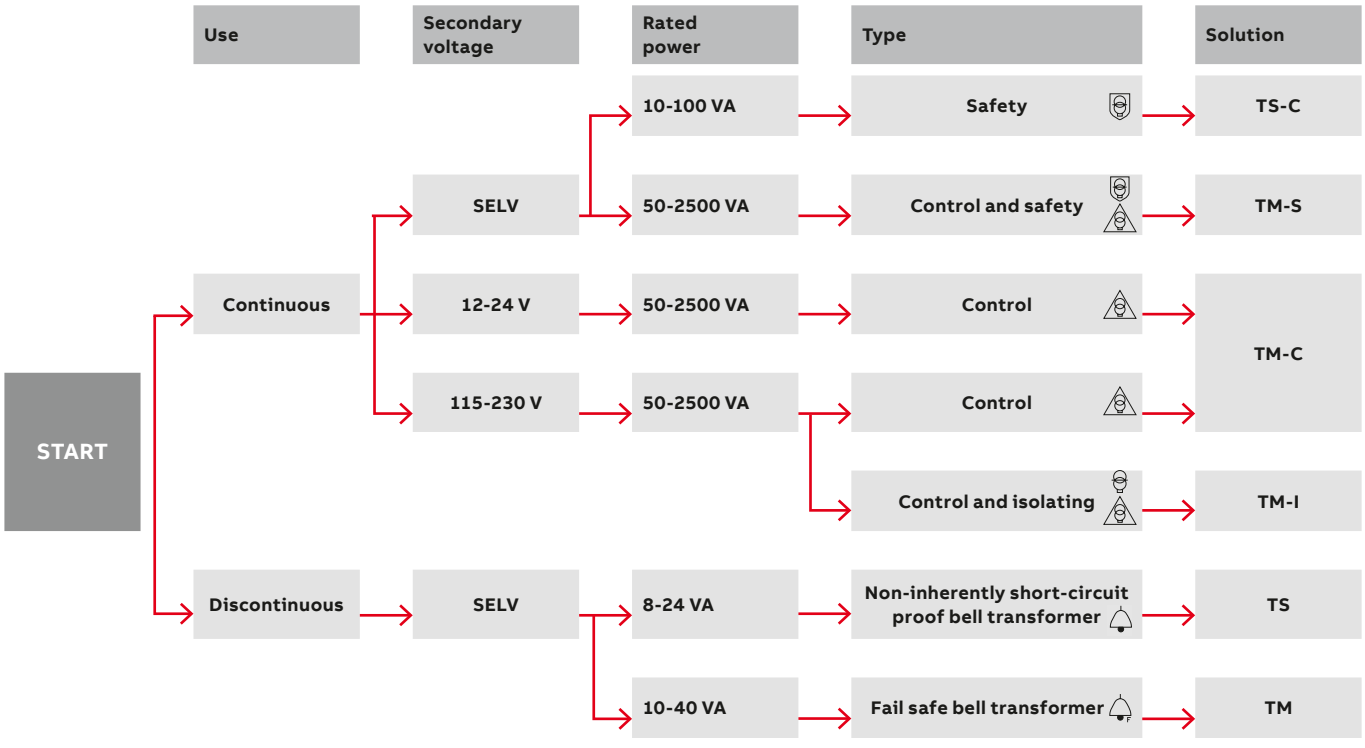

Command and signaling

Transformers selection table

Safety transformers for general use	**Control transformers for general use**	**Control and Safety transformers for general use**	**Control and Isolating transformers for general use**
TS-C	TM-C	TM-S	TM-I
IEC EN 61558-2-6	CEI EN 61558-2-2	CEI EN 61558-2-2 CEI EN 61558-2-6	CEI EN 61558-2-2 CEI EN 61558-2-4
Non-inherently short-circuit proof	Non-short-circuit proof control transformer a	Non-short-circuit-proof control and safety transformer a	Non-short-circuit-proof control and isolating transformer a
■			
10, 16, 25, 40, 63, 100 VA	50 to 2500 VA	50 to 2500 VA	50 to 2500 VA
Continuous	Continuous	Continuous	Continuous
230 V a.c.	230/400 V a.c.	230/400V a.c.	230/400 V a.c.
■		■	■
■	■	■	■
■		■	
2 modules [10 VA]	See overall dimensions 13/60	See overall dimensions 13/60	See overall dimensions 13/60
3 modules [16 VA]			
4 modules [25 VA, 40 VA]			
5 modules [63 VA]			
6 modules [100 VA]			

Bell transformer **TM, TS**

Transformers for supplying extra low voltage, suitable for loads that require a discontinuous supply, in particular doorbells and chimes. The primary and secondary circuits are perfectly isolated and separated.
Reference standard: IEC EN 61558-2-8

Control transformer **TM-C, TM-S*, TM-I***

Transformer for supplying control circuits, for example commands, signaling, interlocks, etc.
Reference standard: CEI EN 61558-2-2

Safety transformer **TS-C, TM-S***

Isolation transformer for supplying safety extra low voltage circuits (<50 V on no load). Accidental contact with the secondary winding phases can be withstood without any danger.
Reference standard: CEI EN 61558-2-6

Isolating transformer **TM-I***

Transformer in which the primary and secondary windings are electrically separated by a double or reinforced insulation, to protect the circuit supplied by the secondary against hazards due to accidental simultaneous contact with earth and live parts, or grounded parts that may become live in the event of an insulation fault.
Reference standard: CEI EN 61558-2-4

* TM-S and TM-I both comply to two standards.

Command and signaling

Control, isolating and safety transformers selection table

Selection table of products and secondary protections

Primary protection: see in Chapter 6 of Electrical installation solutions for buildings - Technical details

		TM-C Control				**TM-S Control/Safety**				**TM-I Control/Isolating**	
Power VA	Secondary voltage	12 V	24 V	115 V	230 V	12 V	24 V	24 V	48 V	115 V	230 V
50	Transformer	2CSM207113R0801		2CSM207213R0801		2CSM236893R0801		2CSM204653R0801 ②		2CSM204583R0801	
	Fuse gauge ①	4 A	2 A	0.4 A	0.2 A	4 A	2 A	2 A	1 A	0.4 A	0.2 A
100	Transformer	2CSM207103R0801		2CSM236933R0801		2CSM207163R0801		2CSM204643R0801		2CSM201123R0801	
	Fuse gauge ①	8 A	4 A	0.8 A	0.4 A	8 A	4 A	4 A	2 A	0.8 A	0.4 A
	Breaker type	S202 C8	S202 C4	S202 C1	S202 C0,5	S202 C8	S202 C4	S202 C4	S202 C2	S202 C1	S202 C0,5
160	Transformer	2CSM236853R0801		2CSM207203R0801		2CSM202073R0801		2CSM204633R0801		2CSM204533R0801	
	Fuse gauge ①	12 A	6.3 A	1.25 A	0.63 A	12 A	6,3 A	6.3 A	3.15 A	1.25 A	0.63 A
	Breaker type	S202 C13	S202 C8	S202 C1.6	S202 C-	S202 C13	S202 C8	S202 C8	S202 C4	S202 C1.6	-
200	Transformer	2CSM236823R0801		2CSM236883R0801		2CSM260043R0801				2CSM204513R0801	
	Fuse gauge ①	16 A	8 A	1.6 A	0.8 A	16 A	8 A			1.6 A	0.8 A
	Breaker type	S202 C16	S202 C8	S202 C2	S202 C1	S202 C16	S202 C8			S202 C2	S202 C1
250	Transformer	2CSM207093R0801		2CSM236923R0801		2CSM260063R0801		2CSM204673R0801		2CSM204493R0801	
	Fuse gauge ①	20 A	10 A	2 A	1 A	20 A	10 A	10 A	5 A	2 A	1 A
	Breaker type	S202 C20	S202 C10	S202 C2	S202 C1	S202 C20	S202 C10	S202 C10	S202 C6	S202 C2	S202 C1
320	Transformer	2CSM236843R0801		2CSM236923R0801		2CSM260063R0801		2CSM204673R0801		2CSM204493R0801	
	Fuse gauge ①	25 A	12 A	2.5 A	1.25 A	25 A	12 A	12 A	6.3 A	2.5 A	1.25 A
	Breaker type	S202 C25	S202 C13	S202 C3	S202 C1,6	S202 C25	S202 C13	S202 C13	S202 C8	S202 C3	S202 C1,6
400	Transformer	2CSM289703R0801		2CSM207193R0801		2CSM260103R0801		2CSM204613R0801		2CSM201073R0801	
	Fuse gauge ①	32 A	16 A	3.15 A	1.6 A	32 A	16 A	16 A	8 A	3.15 A	1.6 A
	Breaker type	S202 C32	S202 C16	S202 C4	S202 C2	S202 C32	S202 C16	S202 C16	S202 C8	S202 C4	S202 C2
630	Transformer	2CSM236813R0801		2CSM207183R0801		2CSM260053R0801		2CSM204603R0801		2CSM204423R0801	
	Fuse gauge ①	50 A	25 A	5 A	2.5 A	50 A	25 A	25 A	12 A	5 A	2.5 A
	Breaker type	S202 C50	S202 C25	S202 C6	S202 C3	S202 C50	S202 C25	S202 C25	S202 C13	S202 C6	S202 C3
1000	Transformer	2CSM292873R0801		2CSM236913R0801		2CSM260093R0801				2CSM204413R0801	
	Fuse gauge ①	80 A	40 A	8 A	4 A	80 A	40 A			8 A	4 A
	Breaker type	S292 C80	S202 C40	S202 C8	S202 C4	S292 C80	S202 C40			S202 C8	S202 C4
1600	Transformer	2CSM292863R0801		2CSM201813R0801		2CSM260083R0801				2CSM204403R0801	
	Fuse gauge ①	125 A	63 A	16 A	8 A	125 A	63 A			16 A	8 A
	Breaker type	S292 C125	S202 C63	S202 C16	S202 C8	S292 C125	S202 C63			S202 C16	S202 C8
2000	Transformer	2CSM292853R0801		2CSM236903R0801		2CSM260073R0801				2CSM204383R0801	
	Fuse gauge ①	160 A	80 A	16 A	8 A	160 A	80 A			16 A	8 A
	Breaker type	-	S292 C80	S202 C20	S202 C10	-	S292 C80			S202 C20	S202 C10
2500	Transformer	2CSM236943R0801		2CSM207173R0801		2CSM204663R0801				2CSM204363R0801	
	Fuse gauge ①	200 A	100 A	20 A	10 A	200 A	100 A			20 A	10 A
	Breaker type	-	S292 C100	S202 C25	S202 C13	-	S292 C100			S202 C25	S202 C13

① FUSES
- Gauge ≤ 6.3 A use aM fuses with high breaking capacity and IEC601260-compliant
- Gauge > 6.3 A use gG fuses IEC60269-2 or IEC60269-3-compliant

② TM-S 50/24-48 P complies with IEC EN 61558-2-4 on the secondary circuit at 48 V and with IEC EN 61558-2-6 on the secondary circuit at 24 V

Command and signaling

TM-C, TM-S, TM-I control, isolating and safety transformers

TM

Technical characteristics				
		TM-C	**TM-S**	**TM-I**
Rated primary voltage Un	[V]	230/400 a.c.	230/400 a.c.	230/400 a.c.
Primary voltage adjustment outlets ±15 V		No	Yes	Yes
Max ambient temperature ③	[°C]	40	40	40
Rated secondary voltage Un	[V]	12-24, 115-230 a.c.	12-24, 24-48 a.c. b	115-230 a.c.
Rated frequency	[Hz]	50/60	50/60	50/60
Isolation voltage between primary and secondary	[kV]	3.5	4.8	4.8
Class of insulation system		class F	class F	class F
Rated powers	[VA]	50-2500	50-2500	50-2500
Primary cable section (Ø max)	[mm²]	6	6	6
Operating temperature	[°C]	①	①	①
Protection degree		IP00	IP00	IP00
Approvals		ENEC (Up to 1000 VA), UR, CSA, RINA	ENEC (Up to 1000 VA), UR, CSA	ENEC (Up to 1000 VA), UR, CSA
Standards		CEI EN 61558-2-2	CEI EN 61558-2-2 CEI EN 61558-2-6	CEI EN 61558-2-2 CEI EN 61558-2-6

① See technical details
② TM-S 50/24-48 P complies to CEI EN 61558-2-4 on the 48 V secondary and to CEI EN 61558-2-6 on the 24 V secondary
③ Maximum temperature without any power draw. See technical details for power draw according to temperature.

Command and signaling

TM-C, TM-S, TM-I control, isolating and safety transformers

TM-I

TM-S

TM-C

TM-C

TM-C control transformer
Transformer for supplying control circuits, for example commands, signaling, interlocks, etc.
Reference standard: CEI EN 61558-2-2.

TM-S safety transformer
Isolation transformer for supplying safety extra low voltage circuits (<50 V on no load). Accidental contact with the secondary winding phases can be withstood without any danger. Reference standard: CEI EN 61558-2-6

TM-I isolating transformer
Transformer in which the primary and secondary windings are electrically separated by a double or reinforced insulation, to protect the circuit supplied by the secondary against hazards due to accidental simultaneous contact with earth and live parts, or grounded parts that may become live in the event of an insulation fault.
Reference standard: CEI EN 61558-2-4

Since TM-C, TM-S and TM-I transformers are not provided with built-in protection, they must therefore be protected according with these rules:
- Primary: line protection must reach or exceed the recommended value in Chapter 6 of Electrical installation solutions for buildings - Technical details. This device guarantees line protection and service continuity but doesn't protect the transformer.
- Secondary: transformer protection must be chosen according to tables in the previous pages. This device protect the transformer.

TM-C single phase control transformers, primary 230-400 V

Rated power	Secondary voltage	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
VA	V a.c.	EAN	Type code	Order code		kg	pc.
50	12-24	071136	TM-C 50/12-24	2CSM207113R0801		1.1	1
100	12-24	071037	TM-C 100/12-24	2CSM207103R0801		2	1
160	12-24	368533	TM-C 160/12-24	2CSM236853R0801		3	1
200	12-24	368236	TM-C 200/12-24	2CSM236823R0801		3.2	1
250	12-24	070931	TM-C 250/12-24	2CSM207093R0801		3.6	1
320	12-24	368434	TM-C 320/12-24	2CSM236843R0801		4.4	1
400	12-24	897033	TM-C 400/12-24	2CSM289703R0801		5.5	1
630	12-24	368137	TM-C 630/12-24	2CSM236813R0801		7.8	1
1000	12-24	928737	TM-C 1000/12-24	2CSM292873R0801		13.2	1
1600	12-24	928638	TM-C 1600/12-24	2CSM292863R0801		21.2	1
2000	12-24	928539	TM-C 2000/12-24	2CSM292853R0801		25.5	1
2500	12-24	369431	TM-C 2500/12-24	2CSM236943R0801		26.8	1
50	115-230	072133	TM-C 50/115-230	2CSM207213R0801		1.1	1
100	115-230	369332	TM-C 100/115-230	2CSM236933R0801		2	1
160	115-230	072034	TM-C 160/115-230	2CSM207203R0801		3	1
200	115-230	368830	TM-C 200/115-230	2CSM236883R0801		3.2	1
250	115-230	071532	TM-C 250/115-230	2CSM207153R0801		3.6	1
320	115-230	369233	TM-C 320/115-230	2CSM236923R0801		4.4	1
400	115-230	071938	TM-C 400/115-230	2CSM207193R0801		5.5	1
630	115-230	071839	TM-C 630/115-230	2CSM207183R0801		7.8	1
1000	115-230	369134	TM-C 1000/115-230	2CSM236913R0801		13.2	1
1600	115-230	018131	TM-C 1600/115-230	2CSM201813R0801		21.2	1
2000	115-230	369035	TM-C 2000/115-230	2CSM236903R0801		25.5	1
2500	115-230	071730	TM-C 2500/115-230	2CSM207173R0801		26.8	1

Command and signaling

TM-C, TM-S, TM-I control, isolating and safety transformers

TM-S single phase control and safety transformers, primary 230-400 V ±15

Rated power	Secondary voltage	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
VA	V a.c.	EAN	Type code	Order code		kg	pc.
50	12-24	368939	TM-S 50/12-24 P	2CSM236893R0801		1.1	1
100	12-24	071631	TM-S 100/12-24 P	2CSM207163R0801		2	1
160	12-24	020738	TM-S 160/12-24 P	2CSM202073R0801		3	1
200	12-24	600435	TM-S 200/12-24 P	2CSM260043R0801		3.2	1
250	12-24	601135	TM-S 250/12-24 P	2CSM260113R0801		3.6	1
320	12-24	600633	TM-S 320/12-24 P	2CSM260063R0801		4.4	1
400	12-24	601036	TM-S 400/12-24 P	2CSM260103R0801		5.5	1
630	12-24	600534	TM-S 630/12-24 P	2CSM260053R0801		7.8	1
1000	12-24	600930	TM-S 1000/12-24 P	2CSM260093R0801		13.2	1
1600	12-24	600831	TM-S 1600/12-24 P	2CSM260083R0801		21.2	1
2000	12-24	600732	TM-S 2000/12-24 P	2CSM260073R0801		25.5	1
2500	12-24	046639	TM-S 2500/12-24 P	2CSM204663R0801		26.8	1
50	24-48	046530	TM-S 50/24-48 P	2CSM204653R0801		1.1	1
100	24-48	046431	TM-S 100/24-48 P	2CSM204643R0801		2	1
160	24-48	046332	TM-S 160/24-48 P	2CSM204633R0801		3	1
250	24-48	046837	TM-S 250/24-48 P	2CSM204683R0801		3.2	1
320	24-48	046738	TM-S 320/24-48 P	2CSM204673R0801		3.6	1
400	24-48	046134	TM-S 400/24-48 P	2CSM204613R0801		4.4	1
630	24-48	046035	TM-S 630/24-48 P	2CSM204603R0801		5.5	1

TM-I single phase control and isolating transformers, primary 230-400 V ±15

Rated power	Secondary voltage	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
VA	V a.c.	EAN	Type code	Order code		kg	pc.
50	115-230	045830	TM-I 50/115-230 P	2CSM204583R0801		1.1	1
100	115-230	011231	TM-I 100/115-230 P	2CSM201123R0801		2	1
160	115-230	045335	TM-I 160/115-230 P	2CSM204533R0801		3	1
200	115-230	045137	TM-I 200/115-230 P	2CSM204513R0801		3.2	1
250	115-230	045038	TM-I 250/115-230 P	2CSM204503R0801		3.6	1
320	115-230	044932	TM-I 320/115-230 P	2CSM204493R0801		4.4	1
400	115-230	010739	TM-I 400/115-230 P	2CSM201073R0801		5.5	1
630	115-230	044239	TM-I 630/115-230 P	2CSM204423R0801		7.8	1
1000	115-230	044130	TM-I 1000/115-230 P	2CSM204413R0801		13.2	1
1600	115-230	044031	TM-I 1600/115-230 P	2CSM204403R0801		21.2	1
2000	115-230	043836	TM-I 2000/115-230 P	2CSM204383R0801		25.5	1
2500	115-230	043638	TM-I 2500/115-230 P	2CSM204363R0801		26.8	1

Accessories

	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Mounting bracket for DIN rail (up to 160 VA)	010333	TM-C-DIN	2CSM201033R0801		0.10	10

Command and signaling

TS-C safety isolating transformers for general use

TS 25 C

TS 100 C

TS-C							
		TS 10 C	**TS 16 C**	**TS 25 C**	**TS 40 C**	**TS 63 C**	**TS 100 C**
Primary rated voltage Un	[V]	230 a.c.	230 a.c.	230 a.c.	230 a.c.	230 a.c.	230 a.c.
Secondary rated voltage Un	[V]	12 - 24 V a.c.	12 - 24 V a.c.	12 - 24 V a.c.	12 - 24 V a.c.	12 - 24 V a.c.	12 - 24 V a.c.
Tolerance on secondary voltage (full load)	[%]	< +/- 5% (according to standards)					
Tolerance on secondary voltage (off load)	[%]	<100% rated secondary voltage (according to standards)					
Rated frequency	[Hz]	50/60	50/60	50/60	50/60	50/60	50/60
Rated power (continuous use)	[VA]	10	16	25	40	63	100
Maximum output current (at 24 V)	[A]	0.42	0.67	1.04	1.67	2.63	4.17
Power loss (off load)	[W]	< 2.5	< 3	< 4	< 4.5	< 4.5	< 1
Power loss (full load)	[W]	< 5	< 5	< 5	< 10	< 15	< 20
Class of insulation system		Class B (corresponding to maximum 120 °C)					
Modules	[No.]	2	3	4	4	5	6
Cable section	[mm²-AWG]	2.5					
Tightening torque	[Nm]	0.5					
Protection degree		IP 20					
Standards		IEC/EN 61558-2-6					
Ambient temperature (operation)		+10 °C ... +40 °C					
Approvals							

TS-C safety isolating transformers for general use

These transformers are non-inherently short-circuit proof. In fact they are equipped with a thermal protective device which automatically restores the power when the transformer is sufficiently cooled down. So even during an overload or a short-circuit they maintain their temperature below the specified limits and they continue functioning after the fault's removal.

They are ideal for supplying permanent power to meters, auxiliary electronic devices (e.g. measu-rement, video-entry phone systems, BUS communication) and circuits with safety extremely-low voltage (SELV) for bathrooms and showers, lighting, fountains, electro-medical devices and suchlike. These devices take up very little space, from 2-module size for the 10 VA version up to 6-module size for the 100 VA version.

Rated power (continuous)	**Secondary rated voltage**	**Bbn 8012542**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
VA	**V**	**EAN**	**Type code**	**Order code**		**kg**	**pc.**
10	12-24	285557	TS 10/12-24 C	2CSM228555R0812		0.35	1
16	12-24	285656	TS 16/12-24 C	2CSM228565R0812		0.45	1
25	12-24	928508	TS 25/12-24 C	2CSM251043R0811		0.92	1
40	12-24	928607	TS 40/12-24 C	2CSM401043R0811		1.1	1
63	12-24	928706	TS 63/12-24 C	2CSM631043R0811		1.15	1
100	12-24	285755	TS 100/12-24 C	2CSM228575R0812		1.45	1

Command and signaling

TM bell transformers

TM 15/12

TM 40/12

Technical characteristics		
Primary rated voltage Un	[V]	230 a.c.
Secondary rated voltage Un	[V]	4, 8, 12, 24
Tolerance on secondary voltage (with load)	[%]	+/- 15% (according to standards)
Rated frequency	[Hz]	50/60
Rated power (discontinuous use)	[VA]	10, 15, 30, 40
Power loss (off load)	[W]	<2.5 (TM10, TM15), <3 (TM30, TM40), <1.25 (TM15 ES)
Modules	[No.]	2 (TM10, TM15), 3 (TM30, TM40)
Cable section	[mm²-AWG]	2.5 - 14
Tightening torque	[Nm]	0.5
Protection degree		IP 20
Standards		IEC/EN 61558-2-8
Ambient temperature (operation)		+10 °C ... +40 °C
Approvals		IMQ

TM fail safe bell transformers

These transformers, with safety extremely-low voltage secondary (SELV), are suitable for loads that require a discontinuous supply, and in particular doorbells and chimes. Fail safe operation and excellent safety are assured thanks to the perfect isolation and separation between the primary and secondary circuits. In addition, the Energy Saving TM-ES version allows reducing power losses by 50%.

Maximum rated power a (disccontinuous)	Secondary voltage rating	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
VA	V c.a.	EAN	Type code	Order code		kg	pc.
10	4-8-12	287155	TM10/12	2CSM228715R0802		0.30	6
10	12-24	287254	TM10/24	2CSM228725R0802		0.30	6
15	4-8-12	287353	TM15/12	2CSM228735R0802		0.30	6
15	12-24	287452	TM15/24	2CSM228745R0802		0.30	6
15	4-8-12	285854	TM15/12 ES	2CSM228585R0802		0.30	1
30	4-8-12	287551	TM30/12	2CSM228755R0802		0.45	4
30	12-24	287650	TM30/24	2CSM228765R0802		0.45	4
40	4-8-12	287759	TM40/12	2CSM228775R0802		0.45	4
40	12-24	287858	TM40/24	2CSM228785R0802		0.45	4

① See diagrams below for the RMS power on each secondary output

Command and signaling

TS bell transformers

TS 8/8

TS 8/12 SW

TS 24/8-12-24

Technical characteristics		
Primary rated voltage Un	[V]	230 a.c.
Secondary rated voltage Un	[V]	4, 6, 8, 12, 24
Tolerance on secondary voltage (with load)	[%]	± 15% (according to standards)
Rated frequency	[Hz]	50/60
Rated power (discontinuous use)	[VA]	8, 16, 24
Power loss (off load)	[W]	<2.5 (TS8, TS16), <3 (TS24), <0.8 (TS8/8 ES), <1.2 (TS16/8-12 ES)
Class of insulation system		class B
Modules	[No.]	2 (TS8, TS16), 3 (TS24)
Cable section	[mm²-AWG]	2.5 - 14
Tightening torque	[Nm]	0.5
Protection degree		IP 20
Standards		IEC/EN 61558-2-8
Ambient temperature (operation)		+10 °C ... +40 °C
Approvals		

TS non-inherently short-circuit proof bell transformers

These transformers, with safety extremely-low voltage secondary (SELV), are suitable for driving loads that call for a discontinuous supply, and in particular doorbells and chimes.
In addition to perfect isolation and separation between the primary and secondary circuits, the TS transformers have a thermal protection device integrated into the secondary that makes them resistant to short circuit currents (non-inherently short-circuit proof).
The TS range is extended with the Energy Saving TS-ES series, which allows reducing power losses by 50%, and the TS8/SW series, that is equipped with a switch for controlling loads connected to the secondary.

Maximum rated power a (disccont.) VA	Secondary voltage rating V c.a.	Switch 0-1	Bbn 8012542 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
8	8		285953	TS8/8 ES	2CSM228595R0812		0.35	1
8	8		286653	TS8/8	2CSM228665R0812		0.35	6
8	12		286851	TS8/12	2CSM228685R0812		0.35	6
8	24		286752	TS8/24	2CSM228675R0812		0.35	6
8	8	■	368304	TS8/8 SW	2CSM081302R0811		0.35	6
8	12	■	368403	TS8/12 SW	2CSM081402R0811		0.35	6
8	4-6-8	■	368601	TS8/4-6-8 SW	2CSM081012R0811		0.35	6
8	4-8-12	■	368700	TS8/4-8-12 SW	2CSM081022R0811		0.35	6
16	8-12		286059	TS16/8-12 ES	2CSM228605R0812		0.35	1
16	8		286455	TS16/8	2CSM228645R0812		0.35	6
16	12		286356	TS16/12	2CSM228635R0812		0.35	6
16	24		286158	TS16/24	2CSM228615R0812		0.35	6
16	4-6-8		286554	TS16/4-6-8	2CSM228655R0812		0.35	6
16	4-8-12		286257	TS16/4-8-12	2CSM228625R0812		0.35	6
24	4-8-12		287056	TS24/4-8-12	2CSM228705R0812		0.45	4
24	8-12-24		286950	TS24/8-12-24	2CSM228695R0812		0.45	4

① See diagrams below for the rms power on each secondary output

Command and signaling

RI, BR, TSM, TSR bells and buzzers

TSM

RI230

Technical characteristics				
		RI12, BR12	RI230, BR230	TSM, TSR
Rated Voltage U_n	[V c.a.]	12	230	230
Rated frequency	[Hz]	50/60	50/60	50
Power consumption	[VA]	4	6	5,5
Sound level	Bell [dB]	80(1)	80(1)	80(2)
	Buzzer [dB]	70(1)	70(1)	70(2)
	Three-tones [dB]			84(2)
Max permanent working time	max 15 sec., after a rest time last 60 sec.			TSM: 1 min TSR: 5 min
Type of sound signal		D	D	
Duration of operation		discontinuous	discontinuous	discontinuous
Max cable cross-section	[mm²]	4	4	10
Mounting position		flexible	flexible	vertical only
Protection degree		IP20	IP20	IP20-IP40
Modules (18 mm)	[No.]	1	1	2
Standard		EN 62080	EN 62080	EN 62080

(1) at 0.6 meter distance
(2) at 1 meter distance

Bells and buzzers

The range of bell and buzzer includes modular versions as 12V or 230V types for acoustic signaling in residential and commercial sectors as well as industry application such as alarms notification, supervision and intensive use (schools, factories etc...). TSM and TSR versions also include a transformer: the input is 230V a.c. and the bell is supplied in 12 or 24 V.

RI electro-mechanical modular bells

Rated voltage	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
V AC	EAN	Type code	Order code		kg	pc.
12	258810	RI12	2CSM232345R0821		0.081	10
230	258919	RI230	2CSM232335R0821		0.083	10

BR electro-mechanical modular buzzers

Rated voltage	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
V AC	EAN	Type code	Order code		kg	pc.
12	273813	BR12	2CSM232365R0821		0.075	10
230	258711	BR230	2CSM232355R0821		0.077	10

Command and signaling

SM, RM, TSM, TSR bells and buzzers

TSR

TSM modular electronic bell (two-tones) + transformer included

Rated voltage	Use	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
V AC		EAN	Type code	Order code		kg	pc.
230	Discontinuous	007005	TSM	2CSM100000R0841		0.300	6

TSR bell + buzzer + transformer included

Rated voltage	Use	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
V AC		EAN	Type code	Order code		kg	pc.
230	Discontinuous	369608	TSR	2CSM100000R0831		0.300	1

Command and signaling

CP-D primary switch mode power supplies

CP-D 12/0.83,
CP-D 24/0.42

CP-D 12/2.1
CP-D 24/1.3

CP-D 24/2.5

CP-D 24/4.2

Description

The CP-D range of modular power supply units in MDRC design (modular DIN rail components) is ideally suited for installation in distribution panels. This range offers devices with output voltages of 12 V DC and 24 V DC at output currents of 0.42 A to 4.2 A. Thanks to their high thermal efficiency, these power supplies have very low power and heat dissipation and can be operated without forced cooling. All power supply units in the CP-D range are approved according to all relevant international standards.

Technical characteristics

- Output voltages: 12 V, 24 V DC
- Adjustable output voltages (devices > 10 W)
- Output currents: 0.42 A / 0.83 A / 1.3 A / 2.1 A / 2.5 A / 4.2 A
- Power range: 10 W, 25 W, 30 W, 60 W, 100 W
- Wide range input: 100-240 V AC (90-264 V AC, 120-375 V DC)
- High efficiency of up to 89 %
- Low power dissipation and low heating
- Free convection cooling (no forced cooling with ventilators)
- Ambient temperature range during operation: -40...+70 °C
- Open-circuit, overload and short-circuit stable
- Integrated input fuse
- LEDs for status indication
- Light-grey housing in RAL 7035
- Various approvals and marks

Rated input voltage	Rated output voltage/current	Bbn	Order details		Price 1 piece	Weight 1 piece	Pack unit
V	V / A	EAN	Type code	Order code		kg (lb.)	pc.
100-240 V AC	12 V DC / 0.83 A		CP-D 12/0.83	1SVR427041R1000		0.06/0.13	1
100-240 V AC	12 V DC / 2.1 A		CP-D 12/2.1	1SVR427043R1200		0.19/0.41	1
100-240 V AC	24 V DC / 0.42 A		CP-D 24/0.42	1SVR427041R0000		0.06/0.13	1
100-240 V AC	24 V DC / 1.3 A		CP-D 24/1.3	1SVR427043R0100		0.19/0.41	1
100-240 V AC	24 V DC / 2.5 A		CP-D 24/2.5	1SVR427044R0200		0.25/0.56	1
100-240 V AC	24 V DC / 4.2 A		CP-D 24/4.2	1SVR427045R0400		0.32/0.71	1

CP-D RU for decoupling of two CP-D power suply units

Input voltage range	Rated input current	Rated output voltage/ current	Bbn	Order details		Price 1 piece	Weight 1 piece	Pack unit
V	A	V / A	EAN	Type code	Order code		kg (lb.)	pc.
9-35 V DC	2 x 5 A	24 V DC / 1 x 10 A		CP-D RU	1SVR427049R0000		0.075 / 0.165	1

Command and signaling

Modular sockets selection table

Series selection

For further information about sockets selection by country please see in Chapter 6 of Electrical installation solutions for buildings - Technical details

		M1175	M1173	M1170	M1174	M1363	M1011
	EU 10A	■	■	■	■		■
	Schuko 10 A / 16 A	■	■	■			
	Italian 10 A		■	■			
	Italian 16 A			■			
	French 10 A / 16 A	Pluggable but not earthed	Pluggable but not earthed	Pluggable but not earthed	■		
	British 13 A					■	
	Swiss						■
							■
							■
							■

Global Compatibility with Local Compliance

Various models designed to meet 5 key national standards (Italian, French, German, English, and Swiss), making them suitable for use in approximately 180 countries.

Enhanced Functionality

The range is completed with versions that include integrated voltage indicator lights and built-in fuses.

Enhanced Safety:

Safety shutters block access to live parts, preventing insertion of objects like wires or tools and protecting untrained users. Equipped with large cage terminals to simplify and secure wiring connections.

Sustainability

Environmental data and the EPD report are provided, offering detailed insights into the environmental impact and sustainability of the product.

Command and signaling

Modular sockets selection table

Model selection

				RAL 7035
German Schuko strandard				
	M1175			2CSM210000R0721
	M1175-L	Indicator light		2CSM212000R0721
	M1175-FL	Indicator light	Fuse 6.3 A aM	2CSM214000R0721
	M1175-C	Cover IP30		2CSM211000R0721
Italian P30 standard				
	M1173			2CSM110000R0701
	M1173-L	Indicator light		2CSM112000R0701
Italian dual standard				
	M1170			2CSM210000R0701

Voltage indicator light (M1175-FL and M1175-L)
The indicator light on the modular sockets clearly shows whether supply voltage is present, helping users easily identify if the socket is powered.

Integrated fuse to selectively protect loads and maintain continuity of service (M1175-FL)
Fused modular sockets are used when continuity of service is requested. With an integrated fuse protecting the phase, they avoid the related breaker to trip if a fault occurs in the connected load

IP30 protective cover (M1175-C)
Includes an IP30 protective cover, which provides protection against solid objects larger than 2.5 mm (like tools or wires) but does not offer protection against water.

Command and signaling

Modular sockets selection table

			RAL 7035
French Standard			
	M1174		2CSM110000R0711
British standard			
	M1363		2CSM259343R0721
	M1363-L	Indicator light	2CSM258163R0721
Swiss standard			
	M1011-T13	Single-phase 10 A Type 13	2CSM220685R0721
	M1011-T23	Single-phase 16 A Type 23	2CSM220695R0721
	M1011-T15	Three-phase 10 A Type 15	2CSM220705R0721
	M1011-T25	Three-phase 16 A Type 25	2CSM220715R0721

Command and signaling
Modular sockets

Modular sockets

Technical specifications

Rated voltage Un		[V]	250 a.c.				
Rated current In		[A]	10 for M1011-T13, M1011-T15 13 for M1363 16 for M1011-T23, M1011-T25, M1170, M1173, M1174, M1175				
Rated frequency		[Hz]	50/60				
Power loss		[W]	0.6				
Modules		[No.]	2.5 for M117x 3 for M1011, M1363				
Safety shutters			yes, on entire range				
Cable section (ø min./max.)		[mm²]	2.5 / 16				
Tightening torque		[Nm]	1.2				
Temperature	storage	[°C]	-40 ... +70				
	operating	[°C]	-25 ... +35				
Mounting position			Any				
Protection degree			IP20 / IP30 versions with cover, when cover is closed				
			M1011	M1175	M1173	M1170	M1174	M1363
Reference standards			SN 441011-1	DIN VDE 0620-1	CEI 23-50	IEC 60884-1	NF C 61 314	BS1363
Approvals				VDE	IMQ		LCIE, CEBEC	BSI

Indicator light technical specifications

Type		fluorescent torpedo-shaped lamp
Function		Indication of power supply presence (M1363, M1173, M1175)
Light colour		green
Power consumption	[W]	0.25

Fuse technical specifications

Type		5 x 20 mm up to 6.3 A aM
Function		phase protection
Breaking capacity	[A]	1500
Reference standard		IEC EN 60127

Command and signaling

Modular sockets

M1175

M1175-C

M1175-C

M1175-FL

M1173

Modular sockets

Modular sockets allow the connection of devices, tools or electrical and electronic non modular equipments in civil and industrial electrical switchboards.
The range is composed by standard versions as well as upgraded versions with additional features as light indicator, protection fuse and cover.

German Shuko standard modular sockets

Color	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
grey	027850	M1175	2CSM210000R0721		0,120	4
grey with cover	029052	M1175-C	2CSM211000R0721		0,140	4

German Shuko standard modular sockets with integrated indicator light and fuse

Color	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
grey with light	028253	M1175-L	2CSM212000R0721		0,140	4
grey with light and fuse	028659	M1175-FL	2CSM214000R0721		0,160	4

Italian P30 standard modular sockets

Color	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
grey	004103	M1173	2CSM110000R0701		0,120	4

Italian P30 standard modular sockets with integrated indicator light

Color	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
grey with light	027058	M1173-L	2CSM112000R0701		0,140	4

Command and signaling

Modular sockets

M1170

M1174

M1363

Italian dual standard modular sockets

Color	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
grey	027454	M1170	2CSM210000R0701		0,120	4

French standard modular sockets

Color	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
grey	006602	M1174	2CSM110000R0711		0,140	4

British standard modular sockets.

Color	Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
grey	593430	M1363	2CSM259343R0721		0,140	2
grey with light	581635	M1363-L	2CSM258163R0721		0,140	2

Command and signaling

Modular sockets

M1011-T13

M1011-T23

M1011-T15

M1011-T25

Swiss standard modular sockets
The M1011 series, with ESTI certification, allows to plug four types of swiss standard plugs, single- and three-phase e with currents up to 10 A or 16 A.
They can be mounted on DIN rail or Smissline rails without supply connection.

Color		Bbn 8012542	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
grey	Single-phase 10 A	206873	M1011-T13	2CSM220685R0721		0.140	2
grey	Single-phase 16 A	206972	M1011-T23	2CSM220695R0721		0.140	2
grey	Three-phase 10 A	207078	M1011-T15	2CSM220705R0721		0.170	2
grey	Three-phase 16 A	207177	M1011-T25	2CSM220715R0721		0.170	2

Command and signaling

MA1-8001 DIN rail adapter

MA1-8001

MA1-8131

MA1-8001 DIN rail adapter

Through an appropriate kit, this product born with the Modular Range of Pilot devices is the perfect case for alongside Ø 22 mm pilot devices with “System pro M compact” products.
The Ø 22 mm pilot devices can now find a greater use even within distribution or automation switchboards with modular panels maintaining an high aesthetic level.
The MA1-8001 offers a lot of advantages:

- Fast and easy mounting
- Simple wiring
- Simple maintenance
- Less depth of operators
- Perfect harmony alongside the “System pro M compact” products

Using MA1-8001 it’s possible to put together “System pro M compact” products with LED pilot light, potentiometer, key selectors, toggle switches, selector switches, push- buttons, mushroom buttons and emergency stop, illuminated or not.
For detailed description of the industrial devices that can be installed using this kit, see technical catalogue 1SFC151003C0201

Color	Bbn 7320500	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
DIN rail adapter KIT (2 modules) ① ②	357880	MA1-8001	1SFA611920R8001		0.023	1
DIN rail adapter (2 modules) ①	357702	MA1-8131	1SFA611920R8131		0.020	10

① Can be used only with Modular range pilot devices units; it cannot be used with the old CBK range or Compact range products.
② KIT includes one Din rail adapter, one empty block and 2 pins

Technical notes

- To assemble the new housing with push-buttons, selector switch and indicator lamps, contact blocks and lamp blocks for DIN rails must be used.
- The MCBH-00 holder is not necessary, because the housing hooks directly to contact blocks.
- To line up with “System pro M compact” products, a maximum of 3 blocks must be used.
- In the configuration with 3 contacts, it is advisable to use securing pins to make the blocks more solid.
- In making up actuators or indicator lamps that use a single contact, one or two MDB-2 empty blocks must be used.

CONTROL AND AUTOMATION

Electrical installation solutions for buildings
Control and automation

Index

DBT Timer digital time switches	2
AG Timer electro-mechanical time switches	8
E 232 staircase lighting time-delay switches	10
E 234 CT-D Time relays for buildings	12
TL Line twilight switches	17
E 450 priority switches	20
Load management relay	21

DBT Timer digital time switches

Deliver exceptional energy efficiency while always ensuring high precision in time-switching.

Main Benefits:

Simple Programming: Easy to set up and schedule various programs through DBT Timer App and Bluetooth communication

Precise Time-Switching: Accuracy of ±0.5 seconds/24h

Flexibility in Program Selection: Wide range of programs and features such as standard, impulse, cycle, random and holiday

Residential

Home automation is significantly improved by utilizing on/off automated digital time switches equipped with flexible programming options as well as outdoor lighting in residential buildings.

Commercial

The lighting, heating, and ventilation systems of shopping malls, hotels, resorts, fitness centers, and office environments can be managed according to the specific days of the week or designated holiday periods.

Industrial

The yearly time switch can control the lighting systems in multiple warehouse rooms through a channel extension, managing up to 8 relays.

Public Gardens

The device's programming enables the irrigation system to activate automatically at predefined sunrise and sunset times, thanks to its built-in astronomical features.

Wide range of programs: standard, impulse, cycle, random and holiday

- Permanent or temporary manual deviation, directly activated with a single touch
- LCD Display with back-lighting
- Up to 900 storable events
- Up to 400 pre-defined cities coordinates
- Switching solar time/daylight saving time

Time synchronization via DY DCF77 or DY GPS antennas. The DY DCF77 antenna receives messages from the atomic clock in Mainflingen, Germany, automatically setting time switches to the correct hour, date, and daylight saving time. The DY GPS antenna provides accurate time and location information globally, compensating propagation delays due to different time zones.

Communication bus for the connection of DY365 2CE and DY365 4CE channel extensions along with DY GPS and DY DCF77 antennas

Clear display of each contact status

Wide range of programs: standard, impulse, cycle, random and holiday

Terminals for wires 2.5 mm²

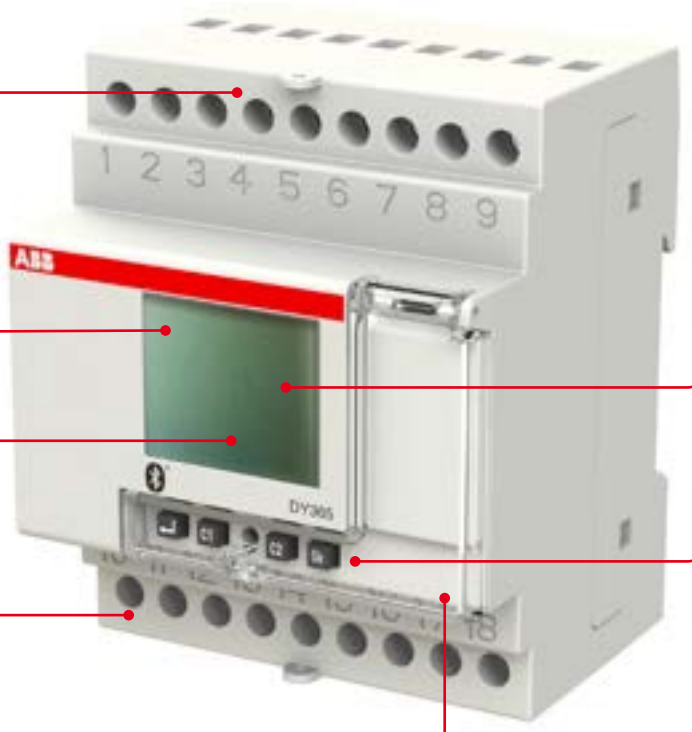

High contrast LCD monitor for excellent visibility in all conditions due to timed back-lighting

Permanent or temporary manual deviation, directly activated with a single touch

Sealable glass and keypad lock to prevent tampering by unauthorised personnel

The DY365 2CE and DY365 4CE are extension modules that provide 2 and 4 relay outputs, respectively. They are designed to be connected to the DY365 unit to increase the total number of contacts from 2 up to a maximum of 8.

Bluetooth communication combined with the DBT Timer APP available for Android and iOS ensure smart configuration and quick visualization. This functionality also allows to transfer programs from one device to another simply using the Smartphone.

Control and automation

DBT Timer digital time switches

DBT Timer

Technical features DBT Timer							
		DY365	**DW1**	**DW2**	**DWA1**	**DWA2**	**DWTL1**
Power supply	[V]	230 AC (-15 % ..+10 %)					
Rated pulsating voltage	[kV]	4					
Contact type		2CO	1CO	2CO	1CO	2CO	1CO
Channel extension		■					
DY DCF77 antenna		■					
DY GPS antenna		■					
DWS external brightness sensor							■
Resistive load	[A]	16					
Inductive load	[A]	10					
Rated frequency	[Hz]	50/60					
Minimum switching		1 min (1 s pulse program)					
Max number of events		900	120	120	120	120	120
Number of channel		2	1	2	1	2	1
Operating accuracy	[sec/ 24h]	± 0,5					
Power consumption	[W]	2.6	2	2	2	2	2
Max. switching power	[VA]	4000					
Switching capacity							
Incandescent	[W]	2000					
Fluorescent	[VA]	600					
Low voltage halogen	[W]	2000					
Halogen	[W]	2000					
Low consumption lamp	[VA]	600					
LED	[W]	500					
Protection degree	[IP]	20					
Max terminal cross-section	[mm²]	2.5					
Tightening torque	[Nm]	0.5					
Installation type		DIN rail					
Operating temperature	[°C]	-20...+50					
Storage temperature	[°C]	-25...+70					
Modules	[n°]	4	2	2	2	2	2
Reference standards		EN 60730-1; EN 60730-2-7; ETSI EN 301 489-1; ETSI EN 301 489-17; ETSI EN 300 328					

Control and automation

DBT Timer digital time switches

Technical features Accessories for Digital yearly time switch - DY365			
		DY DCF77	**DY GPS**
Rated voltage	[V]	12 DC	12 DC
Antenna sensitivity	[mV/m]	0.05	
Operating temperature	[°C]	0...+50	0...+50
Storage temperature	[°C]	-10...+60	-10...+70
Power consumption	[W]		0.5
Time of the signal		5 sending/min	every 30 min
Protection degree	[IP]	54	54
Max. number of connected devices	[No.]	31	31
Max. wiring length	[m]	100	100
Terminal size for cable	[mm²]	1.5	0.75..1.5
Mounting		wall	wall

Technical features Accessories for Digital yearly time switch - DY365		
	DY365 2CE	**DY365 4CE**
Rated voltage	12/24 V AC/DC	12/24 V AC/DC
Numbers of normaly open relays 8A/250V	2	4
Operating temperature	0 - 50°C	0 - 50°C
Storage temperature	-25 - 70°C	-25 - 70°C
Protection degree	IP20	IP20
Mounting	Din rail	Din rail
Modules	2	4

Technical features Accessories for Digital weekly twilight time switch - DWTL1	
	DWS
Threshold	3 ÷ 500 lux
Hysteresis	1 ÷ 50 lux
Max. wiring lenght	50 m
Protection degree	IP65
Operating temperature	-20°C...+50°C
Delay	1 second ÷ 30 minutes

Selection table

Digital time switches	DY365	DWA1	DWA2	DW1	DW2	DWTL1
Weekly		■	■	■	■	■
Yearly	■					
Standard function	■	■	■	■	■	■
Astro function	■	■	■			■
Twilight sensor						■
Numbers of channels	2	1	2	1	2	1
DY GPS/DY DCF77	■					
Bluetooth	■	■	■	■	■	■
2 or 4 channel extension	■					

Standard function includes: standard, impulse, random cycle and holiday programs.

Control and automation

DBT Timer digital time switches

DY365

DW1

DWA1

DWTL1

DBT Timer digital time switches
The unique design, with white backlight LCD display, and extreme ease of use with only four buttons, make DBT Timer ideal to automate the installation functions. The possibility to configure all digital devices via DBT Timer APP and Bluetooth connection makes the configuration and installation time even shorter. DBT Timer digital time switches are equipped with large capacity internal battery to maintain operation without power supply in order to avoid the risk of program loss and to maintain the time settings in case of power failure, respective of its duration. DBT Timer digital time switches are equipped with various functions such as the impulse, cycle, random and holiday function.

Digital yearly time switch - DY365
DY365 is the digital yearly time switch with 2 channels from DBT Timer range. Thanks to the extension channel units DY365 4CE and DY365 2CE, DY365 is able to control up to 8 channels. DY365 can be coupled with DY GPS antenna to allow synchronization received from the Global Positioning System or with DY DCF77 antenna that allows an automatic synchronization of the digital time switch with the Frankfurt DCF77 time signal.

Digital weekly time switch - DW
DW1 and DW2 are weekly digital time switches with 1 and 2 channels, respectively. They allow exclusion of the normal weekly program in every week with the same mode.

Digital weekly astronomical time switch - DWA
The astronomical switches DWA1 and DWA2, respectively, with 1 and 2 channels, automatically control lighting circuits depending on the time of sunrise and sunset, greatly increasing energy efficiency. The programming is in fact based on a mathematical algorithm able to calculate the time of the rising and setting of the sun in a certain location for each day of the year. Once powered the device, simply insert date, time, geographical coordinates and time zone so that it is ready to work. These settings can also be automatically defined using the DBT Timer APP. The installation of astronomical digital time switches is particularly useful when using a twilight switch with external sensor is not recommended because it may be subject to malfunctions caused by air pollution, excessive brightness or vandalism. DWA1 and DWA2 are also indicated for the control of public lighting, shop windows of shops, neon signs, monuments, facades, illuminated fountains, ...

Digital weekly twilight time switch - DWTL1
DWTL1 is digital time switch with astronomical function and external luminosity probe DWS indicated for the management of the lighting system, luminous signs. Digital weekly twilight switch with 1 channel allows the exclusion of the weekly programming. DWTL1 can be configured as astronomical with probe switch which initial configuration requires the activation of the load from sunset to sunrise and during the daytime hours in case of low light. Also,it can be used as programmable twilight switch in which activation of the load occurs when the probe detects a low light condition in case that daily or weekly programming requires it.

Version	Bbn 8012542	Order details		Price 1	Weight 1 piece	Pack unit
	EAN	Type code	Order code	piece	kg	pc.
Yearly time switch, 2 channels	212010	DY365	2CSM221201R1000		0.250	1
Weekly time switch, 1 channel	225317	DW1	2CSM222531R1000		0.129	1
Weekly time switch, 2 channels	225218	DW2	2CSM222521R1000		0.152	1
Weekly astronomical time switch, 1 channel	225119	DWA1	2CSM222511R1000		0.129	1
Weekly astronomical time switch, 2 channels	225010	DWA2	2CSM222501R1000		0.152	1
Weekly twilight time switch, 1 channel	224914	DWTL1	2CSM222491R1000		0.160	1

Control and automation

DBT Timer digital time switches

DY DCF77

DY GPS

DY365 2CE

DY365 4CE

DWS

Accessories for DBT Timer digital time switches

The DY365 2CE and DY365 4CE are extension channel units with 2 and 4 outputs relays. They are respectively coupled to the DY365 in order to expand number of contacts managed from 2 to maximum 8.

DY DCF77 antenna, used in conjuction with the device, enables it to be automatically synchronized with the official DCF77 Frankfurt time signal, broadcast via long wave radio.

DY GPS antenna is available to ensure good coverage around the world in any weather condition. This antenna uses the synchronization from the Global Positioning System and provides more precise values than terrestrial transmissions.

DWS is external probe for light intensity which is coupled with digital weekly twilight switch, DWTL1.

Version	Bbn 8012542	Order details		Price 1	Weight 1 piece	Pack unit
	EAN	Type code	Order code	piece	kg	pc.
DCF77 antenna	504214	DY DCF77	2CSM250421R1000		0.100	1
GPS antenna	504115	DY GPS	2CSM250411R1000		0.080	1
2 channel extension	211914	DY365 2CE	2CSM221191R1000		0.185	1
4 channel extension	211815	DY365 4CE	2CSM221181R1000		0.486	1
DWS external sensor	224815	DWS	2CSM222481R1000		0.021	1

Control and automation

AG Timer electro-mechanical time switches

AD1NO-R-15m

AD1CO-15m

Technical features									
		AD1NO-15m	**AD1NO-R-15m**	**AD1CO-30m**	**AD1CO-R-30m**	**AW1CO-R-210m**	**AD1CO-15m**	**AD1CO-R-15m**	**AW1CO-R-120m**
Rated voltage	[V]	230 AC							
Contact type		1NO	1NO	1CO	1CO	1CO	1CO	1CO	1CO
Resistive load	[A]	16							
Inductive load	[A]	4							
Rated frequency	[Hz]	50/60							
Minimum switching interval	[min]	15	15	30	30	210	15	15	120
Switching accuracy	[min]	± 5							
Number of switching interval		96	96	48	48	48	96	96	84
Running reserve	[h]	-	100	-	150	150	-	150	150
Power consumption	[W]	0.5							
Max. switching power	[VA]	4000							
Incandescent	[W]	2500	2500	3000	3000	3000	3000	3000	3000
Fluorescent	[VA]	1200	1200	1200	1200	1200	1200	1200	1200
Low voltage halogen	[VA]	2000	2000	2000	2000	2000	2000	2000	2000
Halogen (230 V ~)	[W]	2500	2500	3000	3000	3000	3000	3000	3000
Low consumption lamp (CFL)	[VA]	900							
LED	[VA]	100	100	200	200	200	200	200	200
Protection degree		IP20							
Max. terminal cross-section	[mm²]	4							
single flexible cable single rigid cable	[mm²] [mm²]	1 to 2.5mm² 1.5 to 4mm²							
Tightening torque	[Nm]	0.3	0.3	0.5	0.5	0.5	0.5	0.5	0.5
Terminals		with captive screws							
Installation type		DIN rail							
Operating accuracy		± 1 second/day at 23°							
Operating temperature	[°C]	-10...+45	-10...+45	-10...+50	-10...+50	-10...+50	-10...+50	-10...+50	-10...+50
Storage temperature	[°C]	-20...+60	-20...+60	-20...+70	-20...+70	-20...+70	-20...+70	-20...+70	-20...+70
Modules	[n°]	1	1	2	2	2	2.5	2.5	2.5
Reference standards		EN 60730-2-7							

AG Timer electro-mechanical time switches

These analog timers are designed for installation on DIN-rail. They control circuit opening and closing according to the scheduled program. Available both on daily and weekly versions and equipped with a 16 A contact. They can be set on the scheduled program or on the permanent ON-OFF function. The AD1NO-R-15m, AD1CO-R-15m, AW1CO-R-120m, AD1CO-R-30m, AW1CO-R-210m versions are equipped with a built-in battery, charged by the network voltage, which allows the devices to maintain the set time also in case of long (up to 150 h) power supply failures. The products fit applications such as control of lighting systems of shops or commercial buildings, heating and ventilation systems as well as control of automatic irrigation systems of private or external gardens.

Contacts	**Version**	**Bbn 8012542**	**Order details**		**Price 1**	**Weight 1 piece**	**Pack unit**
		EAN	**Type code**	**Order code**	**piece**	**kg**	**pc.**
1NO	Daily time switch without reserve	224716	AD1NO-15m	2CSM222471R1000		0.072	1
1NO	Daily time switch, running reserve	224617	AD1NO-R-15m	2CSM222461R1000		0.075	1
1CO	Daily time switch without reserve	224518	AD1CO-30m	2CSM222451R1000		0.105	1
1CO	Daily time switch, running reserve	224419	AD1CO-R-30m	2CSM222441R1000		0.109	1
1CO	Weekly time switch, running reserve	224310	AW1CO-R-210m	2CSM222431R1000		0.109	1
1CO	Daily time switch without reserve	224211	AD1CO-15m	2CSM222421R1000		0.112	1
1CO	Daily time switch, running reserve	081517	AD1CO-R-15m	2CSM208151R1000		0.116	1
1CO	Weekly time switch, running reserve	081418	AW1CO-R-120m	2CSM208141R1000		0.116	1

Control and automation

AG Timer electro-mechanical time switches

AD1-R-15m-72

Technical features		
		AD1-R-15m-72
Rated voltage	[V]	230 AC
Contact type		1CO
Ohmic loads	[A]	16
Inductive loads	[A]	4
Rated frequency	[Hz]	50/60
Minimum switching interval	[Min]	15
Number of switching interval		96
Running reserve	[h]	100
Power loss	[W]	1.8
Max. switching power	[VA]	4000
Incandescent	[W]	3000
Fluorescent (VA)	[VA]	1200
Low voltage halogen	[VA]	2000
Halogen (230 V ~)	[W]	3000
Low consumption lamp (CFL)	[VA]	900
LED	[VA]	200
Max. terminal cross-section	[mm^2]	4
Tightening torque	[Nm]	0.3
Installation type		wall/panel
Protection degree		IP20
Operating temperature	[°C]	-10 ...+45
Storage temperature	[°C]	-20 ...+60
Reference standards		EN 60730-2-7

AD1-R-15m-72 electro-mechanical time switch

AD1-R-15m-72 is designed for installation on panel/wall. It is used to control circuit opening and closing according to a preset program. Available in daily version, with running reserve, it is characterized by the settings on the front, which during the holding time of the load, allows for the contact status in ON/OFF to be forced until the next switching time. The AD1-R-15m-72 is the perfect solution for controlling lighting systems in shops and public buildings, heating and irrigation systems, etc.

Contacts	**Version**	**Bbn 8012542**	**Order details**		**Price 1**	**Weight 1 piece**	**Pack unit**
		EAN	**Type code**	**Order code**	**piece**	**kg**	**pc.**
1CO	Daily time switch running reserve	081319	AD1-R-15m-72	2CSM208131R1000		0.181	1

Selection table

Analog time switches	**AD1NO-15m**	**AD1NO-R-15m**	**AD1CO-15m**	**AD1CO-R-15m**	**AW1CO-R-120m**	**AD1CO-30m**	**AD1CO-R-30m**	**AW1CO-R-210m**	**AD1-R-15m-72**
Daily	■	■	■	■		■	■		■
Weekly					■			■	
Power reserve		■*		■	■		■	■	■*
Min. time switching	15 min	15 min	15 min	15 min	120 min	30 min	30 min	210 min	15 min
DIN rail mounting	■	■	■	■	■	■	■	■	
Panel/wall mounting									■
Type of contacts	NO	NO	CO	CO	CO	CO	CO	CO	CO

*non-removable battery

Control and automation

E 232 staircase lighting time-delay switches

Technical features	mechanical time delay switch	electronic time delay switch			
	E 232-230	**E 232E-230N**	**E 232E-8/230N**	**E 232E-230 Multi 10**	**E 232E-8/230 Multi 10**
Time range (stepless)	1 – 7 min. in 15 sec. increments	0.5 – 20 min. stepless	0.5 – 20 min. stepless	0.5 – 20 min. stepless	0.5 – 20 min. stepless
Control voltage 230 V AC	■	■	■	■	■
Universal voltage in addition			8 … 240 V AC/DC		8…240 V AC/DC
Glow lamp load	50 mA	150 mA	150 mA	150 mA	150 mA
3/4 conductor operated	switches	automatically	automatically	automatically	automatically
Resettable	■	■	■	■	■
Steady-light switch	■	■	■	■	■
Advance warning acc. DIN 18015-2				■	■
Long-time range of 60 min.				■	■
Multi-functional (10 functions)				■	■
Maximum pulse duration	3 s	■	10 s	■	10 s
Rated voltage	230 V AC	240 V AC	240 V AC	240 V AC	240 V AC
Rated Frequency	50Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Control voltage range	0.9 ... 1.1 Un	0.85 ... 1.1 Un	0.85 ... 1.1 Un	0.85 ... 1.1 Un	0.85 ... 1.1 Un
Power loss	1 VA	6 VA	6 VA	6 VA	6 VA
Rated switching capacity	16 A, 230 V AC	16 A, 230 V AC	16 A, 230 V AC	16 A, 230 V AC	16 A, 230 V AC
Rated insulation voltage U_i	4 kV	4 kV	4 kV	4 kV	4 kV
Filament lamps	2,300 W	2,300 W	2,300 W	3,600 W	3,600 W
Halogen lamps	2,300 W	2,300 W	2,300 W	3,600 W	3,600 W
Fluorescent lamps series compensated / uncorrected	2,300 VA	2,300 VA	2,300 VA	3,600 VA *	3,600 VA *
Fluorescent lamps inductive or capacitive	2,300 VA	2,300 VA	2,300 VA	3,600 VA *	3,600 VA *
Fluorescent lamps shunt compensated	1,300 VA (70 µF)	400 VA (42 µF)	400 VA (42 µF)	1,200 VA (120 µF) *	1,200 VA (120 µF) *
Electronic controlgear	9x7 W, 6x11 W	9x7 W, 7x11 W,	9x7 W, 7x11 W,	34x7 W, 27x11 W,	34x7 W, 27x11 W,
	5x15 W, 5x20 W	7x20 W, 7x23 W	7x20 W, 7x23 W	24x15 W, 22x23 W	24x15 W, 22x23 W
Inductive load (cos φ = 0.6/230 V AC)	2,300	2,300	2,300	2,300	2,300
LED lamp load (<2W)	30 W	20 W	20 W	55 W	55 W
LED lamp load (2-8W)	300 W	180 W	180 W	600 W	600 W
LED lamp load (>8W)	300 W	180 W	180 W	600 W	600 W
Contact material	AgSnO2	AgSnO2	AgSnO2	AgSnO2	AgSnO2
Contact gap	≥ 3 mm	< 3 mm	< 3 mm	< 3 mm	< 3 mm
Mech. serviceable life	> 106	> 107	> 107	> 107	> 107
Serviceable life at rated load, cos φ =1	> 105	> 2x105	> 2x105	> 2x105	>2x105
Serviceable life at rated load, cos φ =0.6	> 104	> 4x104	> 4x104	> 4x104	> 4x104
Max. terminal cross-section	10.7 mm²	13 mm²	13 mm²	13 mm²	13 mm²
Max. conductor cross-section	6 mm²	4 mm²	4 mm²	4 mm²	4 mm²
ON duration	Resettable after 30 sec.	100 %	100 %	100 %	100 %
Ambient temperature	– 10 °C to + 50 °C	– 25 °C to + 50 °C	– 25 °C to + 50 °C	– 25 °C to + 50 °C	– 25 °C to + 50 °C
Housing and insulation material	heat resistant, self-extinguishing thermoplast	heat resistant, self-extinguishing thermoplast	heat resistant, self-extinguishing thermoplast	heat resistant, self-extinguishing thermoplast	heat resistant, self-extinguishing thermoplast
Control current at 230 V AC	4.5 mA	26 mA	26 mA	26 mA (min. 8 mA at 8 V AC)	26 mA (min. 8 mA at 8 V AC)
Minimum command duration	10 ms	20 ms	20 ms	20 ms / 50 ms for multi voltage input	20 ms / 50 ms for multi voltage input

* no disconnection advance warning possible for this application.

Control and automation

E 232 staircase lighting time-delay switches

E 232-230

E 232 E-230N

E 232 staircase lighting time-delay switches

Staircase lighting time-delay switches are usually operated by pushbuttons, often fitted with a glow lamp. Switches are designed for a glow lamp current of up to 150 mA and thus perfectly suitable for installations in multi-storey buildings.

The E 232-230 staircase lighting time-delay switch includes an electro-mechanical timer with a synchronous motor drive to ensure high operational safety in whatever mounting position. The time range is adjustable in increments of 15 seconds from 1 to seven minutes. Resettable after 30 seconds.

E 232E–230N and E 232E-8/230N devices feature electronic time delays. A high switching capacity, 150 mA glow lamp current parallel to the pushbuttons, steplessly adjustable time range from 0.5 to 20 min, as well as low switching noise make these devices so special.

Devices of the E 232E-230 Multi 10 and E 232E-8/230 Multi 10 series are multi-functional products with 10 functions to choose from that can be adjusted from the front. Through an electronically controlled connection of the load at voltage zero, a very high switching capacity of 3,600 W (load of filament lamp) is reached.

The devices include an integrated warning feature (warning by blinking) according to DIN 18015-2 as well as a 60 minute long-time function.

The E 232E-8/230N and E 232E-8/230 Multi 10 staircase lighting time-delay switches offer an additional metallically separated control input for 8…240 V AC/DC.

Time range	Power loss	Bbn 4013614	Order details		Price 1	Weight 1 piece	Pack unit
	W	EAN	Type code	Order code	piece	kg	pc.
1 … 7 min.	1 V A	54824 3	E 232-230	2CDE110000R0501		0.081	10
20 min	6 V A	65416 6	E 232 E-230N	2CDE110003R0511		0.095	10
20 min	6 V A	65417 3	E 232 E-8/230N	2CDE010003R0511		0.1	10
20 min	6 V A	65418 0	E 232 E-230 Multi 10	2CDE110013R0511		0.095	10
20 min	6 V A	65419 7	E 232 E-8/230 Multi 10	2CDE010013R0511		0.1	10

Control and automation

E 234 CT-D time relays for building applications

The CT-D range is designed in a modular housing, making it well suited for building and residential applications. In just 12 order codes the CT-D range covers all the main timing functions needed for building automation, safely and reliably.

A typical application for timers is delayed switching. Switching several rows of lamps on and off in corridors, stairwells, staircases, etc, is a widespread application in which the excellent functionality of the CT-D timers is undisputed.

Air conditioning systems, heaters and fans can be found everywhere in buildings - just like the CT-D timers long used to switch them. On-delay, off-delay and a range of other functions cover all requirements.

Elevators, escalators, gates, compressors and doors - here too ABB timers ensure optimum and time-delayed opening as required. ABB´s CT-D timers cover most functions with just 12 order codes.

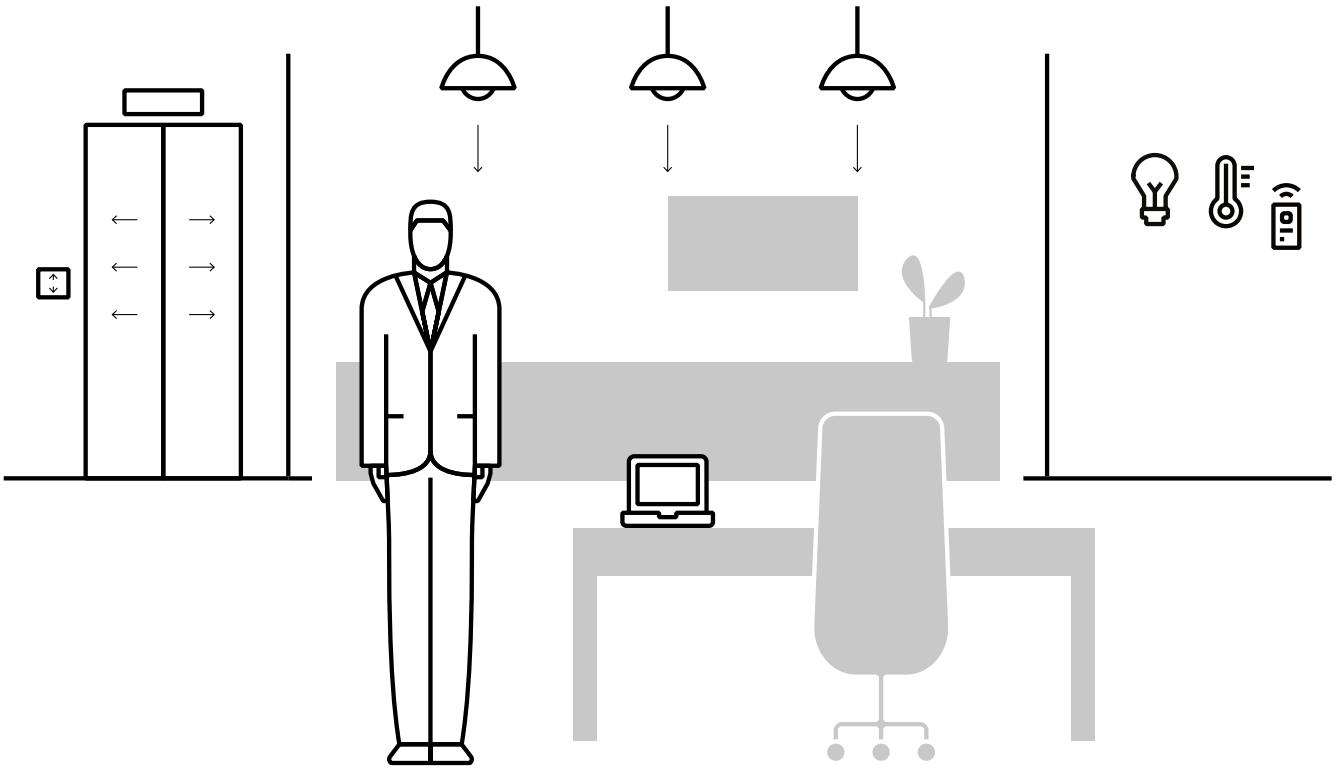

Control and automation

E 234 CT-D time relays for building applications

The CT-D range is ideal for building applications and installation panels, due to its compact modular housing. For maximum flexibility in operation, nine single-function as well as two multifunction devices with seven timing functions are available. The devices offer four or seven time ranges from 0.05 seconds up to 100 hours. Their wide supply voltage range allows their use in applications worldwide.

Space savings

The CT-D range is ideal for installation panels thanks to its compact modular housing. The housing's design helps make the status and configuration more clearly visible. The CT-D range also offers a higher output current than standard industrial types. As well as the 1 c/o contacts, ABB offers devices with 2 c/o contacts for maximum flexibility.

Easy to install

Direct reading scales help make time setting quick and easy. A pre-selection for the time range together with an additional scale for fine adjustments help improve installation efficiency. For more flexibility, the delay time can even be changed when processes are running, making optimization to fit the application even simpler. All devices can be mounted and demounted tool-free.

Global availabilty

The CT-D range fulfills various global standards and approvals, supporting business worldwide. Additionally, all devices from the CT-D range have a wide supply voltage from 24-48 V DC and 24-240 V AC, making it ideal for the use in installation panels around the world.

Control and automation

E 234 CT-D time relays for building applications

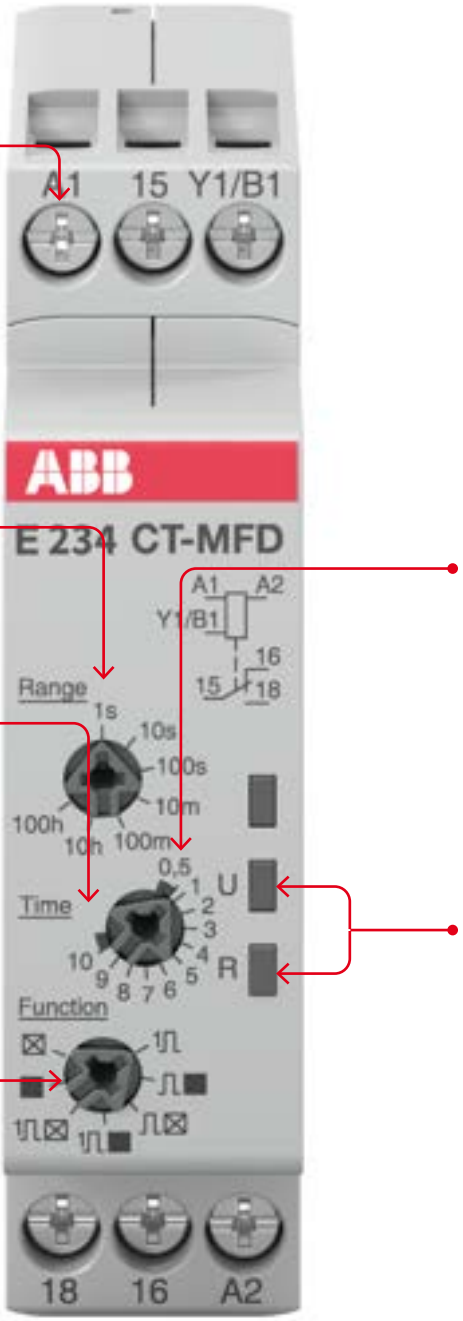

Width 17.5 mm
With a width of just 17.5 mm, the CT-D range timers are ideally suited for installation in distribution panels.

Connection terminals
Wide terminal spacing makes connection of wires simpler:
2 x 1.5 mm² (2 x 16 AWG) with wire end ferrules or 2 x 2.5 mm² (2 x 14 AWG) without ferrules.

Preselection of the time range

Fine adjustment of the time delay

Direct reading scales
Direct setting of the time delay without any additional calculation provides accurate time delay adjustment.

LEDs for status indication
All actual operational states are displayed by front-facing LEDs, thus simplifying commissioning and troubleshooting.

- U - green LED:
  control supply voltage applied /
  timing
- R, R1, R2 - yellow LED:
  output relay energized

Selection of the timing function

- ON-delay
- OFF-delay with aux. voltage
- Impulse-ON
- Impulse-OFF with aux. voltage
- Flasher starting with ON
- Flasher starting with OFF
- Pulse former

Control and automation

E 234 CT-D time relays for building applications

		Order number	1SVR500020R0000	1SVR500020R1100	1SVR500100R0000	1SVR500100R0100	1SVR500110R0000	1SVR500110R0100	1SVR500130R0000	1SVR500150R0000	1SVR500160R0000	1SVR500160R0100	1SVR500210R0100	1SVR500211R0100
		Type	CT-MFD.12	CT-MFD.21	CT-ERD.12	CT-ERD.22	CT-AHD.12	CT-AHD.22	CT-VWD.12	CT-EBD.12	CT-TGD.12	CT-TGD.22	CT-SAD.22	CT-SDD.22
Timing function														
ON-delay	⊠		●	●	●	●								
OFF-delay with aux. voltage	▬		●	●			●	●						
Impulse-ON	1⎍⊠		●	●					●					
Impulse-OFF with aux. voltage	1⎍▬		●	●										
Flasher starting with ON	⎍⊠		●	●						●				
Flasher starting with OFF	⎍▬		●	●										
Pulse generator starting with ON or OFF	⊠⎍										●	●		
Pulse former	1:n		●	●										
Star-delta change-over	Δ												●	●
Features														
Control input, voltage-related triggering			●	●			●	●			●	●		
Time range														
0.05 s - 100 h			●	●	●	●	●	●	●	●	2	2		
0.05 s - 10 min													●	●
Supply voltage														
12-240 V AC/DC				●										
24-48 V DC			●		●	●	●	●	●	●	●	●	●	●
24-240 V AC			●		●	●	●	●	●	●	●	●	●	●
Output														
c/o contact			1	2	1	2	1	2	1	1	1	2		
n/o contact													2	2

Control and automation

E 234 CT-D time relays for building applications

E 234 CT-MFD

E 234 CT-ERD

Description

The CT-D range with its modular design is a perfect solution for installation panels. For maximum flexibility in operation, 10 single-function as well as two multifunction devices with seven timing functions are available. The devices offer four or seven time ranges from 0.05 seconds up to 100 hours. Their wide input range allows their use in applications worldwide.

Timing function	Rated control supply voltage	Time ranges	Control input	Output	Bbn EAN	Type	Order code	Price 1 piece	Weight 1 piece kg (lb)
Multifunctional[1]	24-240 V AC 24-48 V DC	7 (0.05 s - 100 h)	■	1 c/o		CT-MFD.12	1SVR500020R0000		0.060 (0.132)
Multifunctional[1]	12-240 V AC/DC	7 (0.05 s - 100 h)	■	2 c/o		CT-MFD.21	1SVR500020R1100		0.065 (0.143)
ON-delay	24-240 V AC 24-48 V DC	7 (0.05 s - 100 h)	-	1 c/o		CT-ERD.12	1SVR500100R0000		0.060 (0.132)
			-	2 c/o		CT-ERD.22	1SVR500100R0100		0.065 (0.143)
OFF-delay			■	1 c/o		CT-AHD.12	1SVR500110R0000		0.060 (0.132)
			■	2 c/o		CT-AHD.22	1SVR500110R0100		0.065 (0.143)
Impulse-ON			-	1 c/o		CT-VWD.12	1SVR500130R0000		0.060 (0.132)
Flasher starting with ON			-			CT-EBD.12	1SVR500150R0000		
Pulse generator		2×7 (0.05 s - 100 h)	■			CT-TGD.12[2]	1SVR500160R0000		0.060 (0.132)
			■	2 c/o		CT-TGD.22[2]	1SVR500160R0100		0.065 (0.143)
Star-delta change-over		4 (0.05 s - 10 min)	-	2 n/o		CT-SDD.22[3]	1SVR500211R0100		0.065 (0.143)
			-			CT-SAD.22[4]	1SVR500210R0100		

1) Functions: ON-delay, OFF-delay with auxiliary voltage, Impulse-ON, Impulse-OFF with auxiliary voltage, Flasher starting with ON, Flasher starting with OFF, Pulse former
2) ON and OFF times adjustable independently: 2 x 7 time ranges 0.05 s - 100 h
3) Transition time 50 ms fixed
4) Transition time adjustable

■ Control input with voltage-related triggering
- no triggering

Control and automation

TL Line twilight switches

TL1

Technical features			
			TL1
Rated supply voltage		[V]	110 ÷ 230 AC
Rated switching capacity			16A, 250VAC
Contact type			1NO
Incandescent lamps cosφ 1		[W]	1000
Fluorescent lamps cosφ 0.8		[W]	300
Fluorescent- duo/electronic lamps		[W]	300
LED lamps		[W]	100
Rated frequency		[Hz]	50/60
Switching delay ON		[s]	23±10%
Switching delay OFF		[s]	23±10%
Brightness range (with tolerance of +-20%)		[lx]	2...200
Protection degree twilight switch			IP20
Protection degree sensor			IP54
Operating temperature twilight switch		[°C]	-25...+55
Operating temperature sensor		[°C]	-40...+70
Storage temperature twilight switch		[°C]	-40...+70
Storage temperature sensor		[°C]	-50...+80
Power consumption		[W]	0.4 W cosφ 0.4 (idle) 0.9 W cosφ 0.42 (active)
Max terminal cross section		[mm²]	6
Terminals			loss-proof screw
Screw Type			PZ1
Tightening torque	terminals	[Nm]	1.2
	sensor screw	[Nm]	1.2
Mounting			on DIN rail
Switching status indication/ brightness range			red/green LEDs
Max wiring length		[m]	100
Modules		[n°]	1
Reference standards			EN 60669-1 EN 60662-2-1 EN60730-1

Control and automation

TL Line twilight switches

TL1

TL Line modular twilight switches

TL1 twilight switch allows to switch ON and switch OFF lighting devices according to a scheduled level of the ambient light. It is used in combination with an external sensor to detect if the ambient light is higher or lower than the set level . A switching delay prevents them from operating unnecessarily when the light intensity suddenly changes (e.g. lightning, moving vehicles, etc.). The TL1 twilight switch 1 channel is preset with a 10 LUX from factory and it is equipped with 2 signalling LEDs that indicate the setpoint value and display the status of the contact . The operating instructions are printed on the side of the product.

Brightness range	Bbn 8012542	Order details		Price 1	Weight 1 piece	Pack unit
lx	EAN	Type code	Order code	piece	kg	pc.
2:200	299219	TL1	2CSM229921R1341		0.155	1

TLs

Accessories for TL Line modular twilight switches

The external sensor TLs is supplied in the same package of the switch,TL1, but it’s also available separately as spare part. The upper part of the external case (with screw locking), made up of thermoplastic material, bears up against ultraviolet rays to guarantee an homogeneous diffusion of the daylight internally. The sensor is also equipped with a cable gland.

	Bbn 8012542	Order details		Price 1	Weight 1 piece	Pack unit
	EAN	Type code	Order code	piece	kg	pc.
External sensor	299318	TLs	2CSM229931R1341		0.008	1

Control and automation

TL Line twilight switch

TL1 Pole

Technical features		
		TL1 POLE
Rated supply voltage	[V]	110 ÷ 230 AC
Rated switching capacity		16A, 250VAC
Contact type		1NO polarized
Incandescent lamps cosφ 1	[W]	1000
Fluorescent lamps cosφ 0.8	[W]	300
Fluorescent- duo/electronic lamps	[W]	300
LED lamps	[W]	100
Rated frequency	[Hz]	50/60
Switching delay ON	[s]	25+-10%
Switching delay OFF	[s]	35+-10%
Brightness range (with tolerance of +-20%)	[lx]	2...200
Protection degree twilight switch		IP54
Protection degree sensor		IP54
Operating temperature twilight switch	[°C]	-40...+70
Operating temperature sensor	[°C]	-40...+70
Storage temperature twilight switch	[°C]	-50...+80
Storage temperature sensor	[°C]	-50...+80
Power consumption	[W]	0.25 W cosφ 0.35 (idle) 0.8 W cosφ 0.4 (active)
Max terminal cross section	[mm²]	6
Terminals		loss-proof screw
Screw Type		PZ1
Tightening torque: terminals	[Nm]	1.2
screw sensor	[Nm]	1.2
Mounting		Pole/wall mounted
Switching status indication/ brightness range		red/green LEDs
Max wiring length		100
Modules		
Reference standards		EN 60669-1 EN 60662-2-1 EN60730-1

TL1 Pole mounting twilight switch

The TL1 Pole version is designed for installation on the pole/wall, with photocell inputs and integrated cabling including cable gland seals to ensure a high protection degree. Thanks also to the high quality, TL1 Pole provides excellent resistance to atmospheric agents and a long service life. TL1 Pole is also internally equipped with a preset sensor of 10 LUX. The sensor is extractable from the base and allows an easy and efficient maintenance without needing further wiring. TL1 Pole is the ideal solution to manage the external light systems such as the public ones, more precisely, in cases where there is a need of controlling the lighting of public or private roads, gardens, courtyards at the decline of solar radiation during twilight.

Brightness range	Bbn 8012542	Order details		Price 1	Weight 1 piece	Pack unit
lx	EAN	Type code	Order code	piece	kg	pc.
2:200	299110	TL1 Pole	2CSM229911R1341		0.135	1

Control and automation

E 450 priority switches

E 450

Technical characteristics		
	E 451-5.7	E 452-5.7
Operating coil		
Range of rated current equivalent to	6.7 ... 39 A correlates 1.5 ... 9 kW at 230 V, 4.6 ... 27 kW at 230/400 V	
Threshold current	3.1 ... 5.3 A	
OFF delay (max.)	0 main half waves	2 main half waves
Max. continuous current	43 A	
Therm. continuous capacity at 40 °C/104 °F	5 W	
Contact assembly		
Control contact	1 NC contact	
Rated contact current at 250 V	1 A	
Contact material	solid silver	
Max. switching voltage	400 V	
Max. switching capacity	230 VA	
Max. switched current	1 A	
Max. inrush current peak	5 A	
Electr. service life	> 10^5 operations	
Mechanical service life	app. 2 x 10^6 operations	
Max. electrical switching rate	app. 1800 operations/hour	
ON duration	100 %	
Ambient temperature	– 20 °C/– 4 °F to + 40 °C/104 °F	
Response time	10 ... 20 ms	
Release time	5 ... 20 ms	≥ 20 ms
Test voltage contact/coil	2.5 kV	
Clearance and creepage distance	C/250 V AC cording to IEC 669-1-23	
Protection degree	IP 40	
Protection against electric shock	according to DIN VDE 0106 Part 100 (BGV A2)	
Terminal contact	series coil up to 16 mm^2, control contact up to 2.5 mm^2	

E 450 priority switches

The priority switch is used in wiring systems where existing lead cross sections or the size of the power supply service box do not allow for simultaneous operation of two powerful loads (e.g. storage heating and flow-type heater).

The priority switch disconnects the long-term load (storage heating) for as long as the short-term consumer (flow-type heater) is switched on.

The coil of the priority switch is connected in series to the short-term load. When this load is switched on, the NC contact of the priority switch disconnects e.g. the heating system contactor.

For pneumatically controlled flow-type heaters							
Rated current range	**Power loss**	**Bbn 4016779**	**Order details**		**Price 1**	**Weight 1 piece**	**Pack unit**
	W	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
6,7 ... 39 A	2.4	41590 3	E 451- 5.7 A	2CDE160000R0901		0.1	10

For electronically controlled flow-type heaters							
Rated current range	**Power loss**	**Bbn 4016779**	**Order details**		**Price 1**	**Weight 1 piece**	**Pack unit**
	W	**EAN**	**Type code**	**Order code**	**piece**	**kg**	**pc.**
6.7 ... 39 A	2.4	20950 2	E 452-5.7 A	2CDE160010R0901		0.1	10

Control and automation

Load management relay

LCR

Technical characteristics		
Input		
Rated voltage Un	[Vac]	230 (-15%/+10%)
Rated frequency	[Hz]	50/60
Rated capacity In	[A]	32
Power consumption	[VA]	4
Display		
Type of display		backlit LCD
Resolution	[kW]	0.01
Display dimensions	[mm]	27 × 23
Non-priority load		
Regulating thresholds	[kW]	0.8..7
Resolution of threshold	[kW]	0.1
Delay of loads disconnection	[sec]	0..9999
Delay between one connection and the next one	[sec]	0..9999
Alarm notification		LED // buzzer
Relay output		
Rated current	[A]	16
Rated voltage	[Vac]	250
Climatic conditions		
Storage temperature		-10°C to +65°C
Operating temperature		-10°C to +45°C
Relative humidity		max. 90% (non-condensing)
Protection degree		
At terminals		IP20
On the front panel		IP51
Max cable cross-section		
rigid	[mm²]	4
flexible	[mm²]	6
Modules (18mm)	[No.]	2

Load management relay - LCR

Installed downstream of the main circuit-breaker, it compares the actual power consumption of the system to a preset maximum permitted value. Additionally, the load management relay prevents tripping of the main circuit-breaker by sequentially switching off one non-priority load when the preset threshold is exceeded. One red LED and an integrated buzzer indicate the load OFF conditions. At preset time intervals, the device automatically attempts to reconnect the previously disabled load.

Note: In unbalanced three phase systems same function of LCR can be implemented via DMTME multimeters. Digital outputs of the multimeter can be set to trip with an user defined delay to switch off - by means of external contactors - non prioritary loads of arbitrary consumption. See for details in Chapter 8 of Electrical installation solutions for buildings.

Rated current	Bbn 8012542			Price 1 piece	Weight 1 piece	Pack unit
A	**EAN**	**Type code**	**Order code**		**kg**	**pc.**
32	299011	LCR	2CSM229901R1311		0.135	1

ENERGY EFFICIENCY

Electrical installation solutions for buildings
Energy efficiency

Index

M4M network analyzers	2
D1M multifunction and power meters	12
IP Switches	18
Energy meters selection table	20
Single phase – Direct Energy meters	24
Single phase – Indirect Energy meters	30
Three phase – Direct Energy meters	34
Three phase – Indirect Energy meters	40
Energy Meter – D1D 15-ME DC	45
ABB EQmatic	47
InSite energy management system SCU100 - SCU200	48
Comparative Overview of SCU100 and SCU200	50
SCU100	52
SCU200	56
InSite Energy Pro	60
Plug-in expansion modules for SCU200	62
Power supply modules INS-PS-1 and INS-PS-2	64
Metering modules INS-E3 and INS-E3-5	65
USB Communication module INS-USB	66
Wireless M-bus Communication module INS-WM	67
LTE Connectivity module INS-LTE	68
Antenna for the InSite system INS-ATE	69
LoRa Communication module INS-LORA	70
Collector Hub module INS-HUB	71
Integrated devices with SCU100 and SCU200	72
Branch monitoring sensors	74
Smart Auxiliary & Signalling device INS-S/H	77
Digital I/O modules DM00, DM10, DM11	78
InSite Tap-off Box module INS-TB	79
HMI Display INS-HMI	82
Voltmetric and current switches	88
E 233 hour counters	89
HMT hour counters	90
TMD temperature control units	91
Current transformers selection table	92
CT measurement current transformers with through primary	96
CTA measurement current transformers with wound primary	101
CTO split core measurement current transformers	102
TRF M measurement modular current transformers	103

M4M Network analyzers

Accurate electrical measuring and power monitoring.

Simple in every aspect, M4M enables accurate energy efficiency evaluations and perfectly fits the ABB solution for monitoring, optimization and control of electrical system.

Smart commissioning
Bluetooth module for easy configuration through EPiC Mobile App unique commissioning tool.

Accurate measurement
Class 0,5 measurement according to IEC 61557-12 and advanced power quality functionalities, including historical measurements.

Option for MID Approval
Class C accuracy in accordance with 2014/32/EU for billing applications.

Intuitive access
Simplified access to the device via touch screen display or 5 pushbuttons keypad.

Clear visualization
Color display and App-structured menu for advanced graphic visualization.

Easy to install
Fast one-hand mounting and comfortable installation with clips in only 57 mm depth inside the panel.

Full communication
ABB Ability™ native network analyzers with complete communication protocols and I/O options for integration in any system.

Fast wiring
All-removable terminals and one tool process to speed up the wiring activities.

PEP ecopassport

Sustainability
Compliant to the PEP ecopassport® environmental declaration

Intuitive interface
Touchscreen display and easy-to-access App-structured menu make network analyzers' configuration and operation simple and quick. Graphic color display for advanced visualization of the Class 0,5S accurate parameters, interactive pop-ups and complete notifications. Quick navigation is ensured by Homepage and favorite page setting.

Full integration
Natively integrated in sub-distribution management System pro M compact InSite and ABB Ability™ Energy and Asset Manager cloud-solution. To allow monitoring, optimization and control of the complete electrical system.
Wide integration in all main applications through embedded communication protocols (Modbus RTU, Modbus TCP/IP, BACnet/IP, Profibus DP V0).

Smart commissioning
All M4M network analyzers are equipped with Bluetooth BLE module, ensuring smart configuration and quick visualization via unique EPiC commissioning tool, both available as mobile App and desktop software. Availability of remote firmware update regularly at any time guarantees the latest and the most secure version of the device with no impact on operations.

Installation in any panel
Comfortable installation and secure fix on the panel is ensured by the easy-to-use clips, with different thickness setup for compatibility with any panel. One-hand mounting of the device thanks to the hooks on the housing.
The reduced depth of only 57 mm inside the panel makes M4M suitable even in small-size switchboards.

Fast installation and wiring
All terminals on M4M are removable, including the current transformers (CTs) inputs for current measurement, allowing to carry out the wiring directly on the terminals and speeding up the process. Moreover, the vertical disposition of the terminals makes the cabling inside the switchboard more comfortable.

Rogowski coils compatibility
Specific M4M versions compatible with ABB's R4M Rogowski coils allow to retrofit in existing installations, integrating power quality metering with 0 downtime. The pre-wired terminals of R4M coils allow to save up to 70% time for current transformers cabling compared to standard CTs.

Energy efficiency

Network analyzers M4M 20, 30 and 2X

Technical features				
Type		**M4M 20 - Class 0,5S**	**M4M 30 - Class 0,5S**	**M4M 2X**
Auxiliary power supply				
Voltage range	[V]	48 - 240 VAC/VDC ±15%		
Frequency	[Hz]	50-60		
Power Consumption	[VA]	10 VA max		
Installation category		CAT III 300V class per IEC 61010-1 edition 3		
Protection fuse		T1 A - 277 VAC		

Measurement accuracy*				
Measurement type		True RMS up to the 40th harmonic		
		128 samples per cycle, zero blind		
IEC 61557-12		IEC 61557-12 PMD/S/K70/0,5		
Active energy		Class 0,5 acc. to IEC 61557-12 [*]		
		Class 0,5S acc. to IEC 62053-22		
Reactive energy		Class 2 acc. to IEC 61557-12		
		Class 2S acc. to IEC 62053-23		
Active power		Class 0,5 acc. to IEC 61557-12		
Reactive power		Class 2 acc. to IEC 61557-12	Class 1 acc. to IEC 61557-12	Class 1 acc. to IEC 61557-12
Apparent power		Class 0,5 acc. to IEC 61557-12		
Voltage		Class 0,2 acc. to IEC 61557-12		
Current		Class 0,2 acc. to IEC 61557-12		
Neutral current		Calculated	Class 0,2 acc. to IEC 61557-12	Calculated (2X, 2X PQ1, 2X RTS) Class 0,2 acc. to IEC 61557-12 (2X PQ2)
Frequency		Class 0,1 acc. to IEC 61557-12		
Unbalances (Current, Voltage)		Class 0,2 acc. to IEC 61557-12		
Harmonics, THD (Current, voltage)		Class 1 acc. to IEC 61557-12		

* The total accuracy rate returned in the output is equal to the sum of the Analog Output accuracy rate and the device accuracy rate.

Voltage measurement inputs		
Measurement range	[V]	46 - 400 V AC (L-N) 80 - 690 V AC (L-L) (+20%)
Measurement category		400V~ (CAT III)
Rated frequency	[Hz]	50-60 Hz
Max. VT secondary (indirect connection)	[V]	400 VAC (L-N)
Max over voltage	[V]	800 VAC (L-L)
Protection fuse	[V]	T1 A - 277 VAC

* Accuracy referred to insertion with .../5A CT or Rogowski coils, according to product version. Derating for .../1A CT.

Insulation sharacteristics	
Test Voltage Impulse @230V to accessible parts	6,4 kV 1,2/50µS
Test Voltage Impulse @400V to accessible parts	9 kV 1,2/50µS
Test Voltage @230V to accessible parts	3 kV 60s @2000m
Test Voltage @400V to accessible parts	3,6 kV 60s @2000m

Energy efficiency

Network analyzers M4M 20, 30 and 2X

Technical features				
Type		**M4M 20 - Class 0,5S**	**M4M 30 - Class 0,5S**	**M4M 2X**
Current measurement inputs				
Number of current inputs		3 (L1, L2, L3)	4 (L1, L2, L3, N)	3 (2X, 2X PQ1, 2X RTS), 4 (2X PQ2)
Indirect insertion with CT				
CT rated secondary current			5 A (Class 0.5S)	
			1 A (Class 0.5S)	
Max primary CT			50 kA	
Measurement range without accuracy derating			50 mA - 6 A	
Starting current			1 mA	
Burden			0.024 VA at 6 A	
Indirect insertion with Rogowski coils		**M4M 20 Rogowski**	**M4M 30 Rogowski**	**-**
Rated current			10,000 A	-
Measurement range without accuracy derating			100 A - 12 kA	-
Length of coils connections cable to M4M		3 m	3 m	
Starting current	[A]		10 A	-
I/O				
Digital Output				
Voltage (min - max)			5 - 240 VAC/DC	
Current (min - max)			2 - 100 mA	
Max ON state drop voltage			1.5 V	
Max R value at Min voltage conditions (5 V)			1750 Ohm	
Min R value at Max voltage conditions (240 V)			2400 Ohm	
Pulse duration	[ms]		20 ms ON, 20 ms OFF	
Pulse frequency			25 Hz	
Alarm activation delay	[s]		1 - 900 s (programmable)	
Alarm return hysteresis			0 - 40% (programmable)	
Digital Input				
Maximum voltage			240 VAC/DC	
Max voltage for OFF state on input			20 VAC/DC	
Min voltage for ON state on input			45 VAC/DC	
Analogue Output				
Programmable electrical span			Span [0 - 20 mA or 4 - 20 mA]	
Load			Typical 250 Ohm, max 500 Ohm	
Technical data for MID version				
MID standards			EN 50470-1 - EN 50470-3 - EN 62052-31	
Voltage measurement (type of network and rated voltage)			3Ph/4W - 3Ph/3W - 2Ph/3W - 1Ph/2W - 3x230/400	
Current rating (I min- I ref(Imax)			0,01-1(6) A	
Rated frequencies			50 Hz and 60 Hz	
Tolerance on rated frequencies			+/- 2%	
Active Energy accuracy class			Class C	
Pulse value S0 (pulse constant)			200000 imp/kWh	
Electromagnetic ambient conditions			Class E2	
Mechanical ambient conditions			Class M1	
Utilization category - IEC 62052-31			2	
LED indicator pulse frequency			200000 imp/kWh	
LED indicator pulse length			1ms	

Energy efficiency

Network analyzers

Technical features				
Type		**M4M 20 - Class 0,5S**	**M4M 30 - Class 0,5S**	**M4M 2X**
Mechanical characteristics				
Overall dimensions		96 mm × 96 mm × 78 mm (Depth inside the switchboard: 57 mm)		96 mm x 96 mm x 78 mm (DIN-rail mounting)
IP degree of protection (acc. to IEC 60529)		Front: IP54		-
		Terminals: IP20		
Weight	[g]	400		
Terminal characteristics				
Voltage inputs		Nominal cross section: 2,5 mm² Solid/stranded wire: 0,2 - 2,5 mm2 (AWG 24 - 12) Pitch: 7,62 mm Poles: 4		
Current inputs		Nominal cross section: 2,5 mm² Solid/stranded wire: 0,2 - 2,5 mm² (AWG 24 - 12) Pitch: 5,08 mm Poles: 6 Screw flanges for fixing	Nominal cross section: 2,5 mm² Solid/stranded wire: 0,2 - 2,5 mm2 (AWG 24 - 12) Pitch: 5,08 mm Poles: 8 Screw flanges for fixing	
RS-485 Serial port		Nominal cross section: 2.5 mm² Solid/stranded wire: 0.2 - 2.5 mm² (AWG 24 - 12) Pitch: 5.08 mm Poles: 3		
I/O		Nominal cross section: 2.5 mm² Solid/stranded wire: 0.2 - 2.5 mm² (AWG 24 - 12) Pitch: 5.08 mm Poles: 3 (Programmable I/O, only on M4M 20 I/O) Poles: 3 (Digital outputs) Poles: 3 (Analogue outputs, only on M4M 20 I/O)	Nominal cross section: 2.5 mm² Solid/stranded wire: 0.2 - 2.5 mm² (AWG 24 - 12) Pitch: 5.08 mm Poles: 5 (Programmable I/O) Poles: 3 (Programmable I/O only on M4M 30 I/O) Poles: 3 (Analogue outputs, only on M4M 30 I/O)	Nominal cross section: 2,5 mm² Solid/stranded wire: 0,2 - 2,5 mm2 (AWG 24 - 12) Pitch: 5,08 mm Poles: 5 (Programmable I/O)
Rogowski current probes		Only with ABB Rogowski probes: - R4M-200 2CSG202150R1101 (200 mm diameter) - R4M-80 2CSG202160R1101 (80 mm diameter)		-
Climatic conditions				
Operating temperature		-25 to 70 °C (K70 acc. to IEC 61557-12)		
Storage temperature		-40 to 85 °C (K70 acc. to IEC 61557-12)		
Relative humidity		Max 93% (non-condensing) at 40°C		
Pollution degree		2		
Altitude		< 2,000 m		
User Interface				
Access to device		5 pushbuttons	Touchscreen	-
Display type		Graphic color display		-
Display dimensions		70 × 52 mm (3.5")		-

Energy efficiency
Network analyzers

Technical features			
Type	**M4M 20 - Class 0,5S**	**M4M 30 - Class 0,5S**	**M4M 2X**
Communication protocol			
Modbus RTU	**M4M 20 Modbus, M4M 20 I/O, M4M 20 Rogowski**	**M4M 30 Modbus, M4M 30 I/O, M4M 30 Rogowski**	**M4M 2X Modbus**
Communication interface	RS485 with optical isolation		
Baud rate	9.6, 19.2, 38.4, 57.6, 115.2 kbps		
Parity number	Odd, Even, None		
Stop bit	1, 2		
Address	1-247		
Connector	3 pole terminal		
Profibus DP-V0	**M4M 20 Profibus**	**M4M 30 Profibus**	**-**
Protocol	Profibus with slave DP-V0 function in compliance with IEC 61158 regulations		-
Communication interface	RS485 with optical isolation		-
Baud rate	Automatic detection [9.6 kbps - 12 Mbps]		-
Address	0-126		-
Connector	DB 9 female connector (do not use connectors with 90° cable outlet)		-
LED indicators	Green for communication status		-
	Red for communication error		-
Modbus TCP/IP	**M4M 20 Ethernet**	**M4M 30 Ethernet**	**M4M 2X Ethernet**
Protocol	Modbus TCP/IP		
Communication interface	RJ45	RJ45 (2 ports for daisy-chain)*	
BACnet	**M4M 20 Bacnet**	**M4M 30 Bacnet**	
Protocol	BACnet/IP		-
Communication interface	RJ45		-
Bluetooth			
Type	BLE (Bluetooth Low Energy)		
Real-time clock			
Clock drift	-	~ 0.4 seconds per day	
Battery backup time	-	~ 3 days without aux supply	
Standards			
Power metering and monitoring devices (PMD)	IEC 61557-12 (IEC 62053-22, IEC 62053-23)		
Electrical safety	IEC 61010-1		
EMC	IEC 61326-1 (IEC 61000-3-2, IEC 61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11)		

*1x RJ45 port available on M4M 30-M

Energy efficiency

Network analyzers

Technical features			
Type	**M4M 20 - Class 0,5S**	**M4M 30 - Class 0,5S**	**M4M 2X - Class 0,5S**
Real-time			
TRMS current	●	●	●
TRMS Voltage	●	●	●
Frequency	●	●	●
Active, Reactive and Apparent Power	●	●	●
Power Factor	●	●	●
Operating timer, countdown timer	●	●	●
Energy			
Active, Reactive and Apparent Energy	●	●	●
4 quadrants Energy (Import/Export)	●	●	●
Tariffs	/	●	/
Power Quality			
THD (I, VLN, VLL)	●	●	●
Individual Harmonics	/	40th	25th
Unbalances (I, VLN, VLL)	/	●	●
Neutral current	Calculated	Measured	Calculated
Phasors (I, VLN)	/	●	/
Waveforms (I, VLN, VLL)	/	●	/
Data recording and logs			
Single alarms	25	25	25
Warnings, alarms and errors log	●	●	●
Complex alarms with logics	/	4	/
Demand values (average)	Basic	Advanced	Basic
Min/Max Demand values	Basic	Advanced	Basic
Energy Trending logs	/	●	/
RTC	/	●	●
HMI	**Graphic color**	**Graphic color touchscreen**	
Graphs visualization	Basic	Advanced	/
Notifications	●	●	/
Homepage and favourite page	●	●	/
Password protection	●	●	/
Connectivity			
Automatic integration in ABB Ability™ EDCS	●	●	●
Bluetooth Low Energy	●	●	●
Communication Protocols	Modbus RTU, Modbus TCP/IP, Profibus DP-V0, BACnet/IP	Modbus RTU, Modbus TCP/IP, Profibus DP-V0, BACnet/IP	Modbus RTU, Modbus TCP/IP
RJ45 Daisy Chain (Ethernet version)*	/	●	●

*1x RJ45 port available on M4M 30-M

Energy efficiency
Network analyzers

M4M 20

M4M 20 is ABB's network analyzer range that provides complete and accurate electrical parameters monitoring and basic power quality analysis.

Equipped with graphic color display for advanced visualization of the measured parameters

and Bluetooth module for smart commissioning.

Communication protocol	I/O	Bbn 8012542 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
BLE	2 Digital out.	511519	M4M 20	2CSG251151R4051	0,400	1
BLE, Modbus RTU	2 Digital out.	511410	M4M 20 Modbus	2CSG251141R4051	0,400	1
BLE, Modbus TCP/IP	2 Digital out.	044710	M4M 20 Ethernet	2CSG204471R4051	0,400	1
BLE, Profibus DP-V0	2 Digital out.	511311	M4M 20 Profibus	2CSG251131R4051	0,400	1
BLE, BACnet/IP	2 Digital out.	368311	M4M 20 Bacnet	2CSG236831R4051	0,400	1
BLE, Modbus RTU	2 Progr. I/O, 2 Digital out., 2 Analogue out.	511618	M4M 20 I/O	2CSG251161R4051	0,400	1
MID BLE, Modbus RTU	2 Digital Out.	390558	M4M 20-M MODBUS	2CSG239055R4051	0,400	1
MID BLE, Modbus TCP/IP	2 Digital Out.	390657	M4M 20-M ETHERNET	2CSG239065R4051	0,400	1

M4M 20 - Rogowski version

M4M 20 is also available as compatible with ABB's R4M Rogowski coils for current measurement, increasing the flexi-bility of network analyzers offer and allowing retrofit in any existing installations.

M4M 20 Rogowski together with R4M Rogowski coils ensures the integration of basic power quality metering in any existing system with 0 downtime.

Communication protocol	I/O	Bbn 8012542 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type	Order code		
BLE, Modbus RTU	2 Digital out.	070818	M4M 20 Rogowski	2CSG207081R4051	0.400	1

M4M 30

M4M 30 is ABB's network analyzer range that allows complete power quality analysis and energy efficiency evaluations.

Equipped with touchscreen color display for simplified access to the device and with Bluetooth module for smart commissioning.

Communication protocol	I/O	Bbn 8012542 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
BLE, Modbus RTU	4 Progr. I/O	747611	M4M 30 Modbus	2CSG274761R4051	0,400	1
BLE, Modbus TCP/IP	4 Progr. I/O	746812	M4M 30 Ethernet	2CSG274681R4051	0,400	1
BLE, Profibus DP-V0	4 Progr. I/O	367918	M4M 30 Profibus	2CSG236791R4051	0,400	1
BLE, BACnet/IP	4 Progr. I/O	024514	M4M 30 Bacnet	2CSG202451R4051	0,400	1
BLE, Modbus RTU	6 Progr. I/O, 2 Analogue out.	024712	M4M 30 I/O	2CSG202471R4051	0,400	1
MID BLE, Modbus RTU	4 Progr. I/O	390350	M4M 30-M MODBUS	2CSG239035R4051	0,400	1
MID BLE, Modbus TCP/IP	4 Progr. I/O	390459	M4M 30-M ETHERNET	2CSG239045R4051	0,400	1

Energy efficiency
Network analyzers

M4M 30 - Rogowski version

M4M 30 is also available as compatible with ABB's R4M Rogowski coils for current measurement, increasing the flexi-bility of network analyzers and allowing retrofit in any existing installations. M4M 30 Rogowski together with R4M coils ensure integration of complete PQ analysis in any existing system with 0 downtime.

Communication protocol	I/O	Bbn 8012542	Order details		Weight 1 piece	Pack unit
		EAN	Type	Order code	kg	pc.
BLE, Modbus RTU	4 Progr. I/O	024613	M4M 30 Rogowski	2CSG202461R4051	0.400	1

R4M ROGOWSKI COILS

R4M Rogowski coils are flexible current transformer based on Rogowski technology, ideal to retrofit existing installa-tions up to 12kA. Available in two different sizes (80mm or 200mm diameters), R4M coils are directly equipped with pre-wired removable terminals that perfectly fit M4M 20 Rogowski (3 Rogowski coil inputs) and M4M 30 Rogowski (4 Rogowski coil inputs), with no need for external integrators.

Diameter (mm)	Bbn 8012542	Order details		Weight 1 piece	Pack unit
	EAN	Type	Order code	kg	pc.
80	021605	R4M-80	2CSG202160R1101	0.150	1
200	021506	R4M-200	2CSG202150R1101	0.250	1

M4M 2X

M4M 2X is ABB's network analyzer range that ensuring higher flexibility to project specifications compared to standard network analyzers. M4M 2X is available without display, only communicating via protocols and Bluetooth module for smart remote commissioning.

Communication protocol	I/O	Func-tionality package	Bbn 8012542 EAN	Order details		Weight 1 piece kg	Pack unit pc.
				Type code	Order code		
BLE, Modbus RTU	2 Digital out.	2X	601111	M4M 2X Modbus	2CSG260111R4051		
BLE, Modbus TCP/IP	2 Digital out.	2X	600619	M4M 2X Ethernet	2CSG260061R4051		
BLE, Modbus RTU	2 Digital out.	2X+PQ1	390756	M4M 2X Modbus PQ1	2CSG239075R4051		
BLE, Modbus TCP/IP	2 Digital out.	2X+PQ1	391258	M4M 2X Ethernet PQ1	2CSG239125R4051		
BLE, Modbus RTU	2 Digital out.	2X+PQ2	390855	M4M 2X Modbus PQ2	2CSG239085R4051		
BLE, Modbus TCP/IP	2 Digital out.	2X+PQ2	391357	M4M 2X Ethernet PQ2	2CSG239135R4051		
BLE, Modbus RTU	4 Progr. I/O	2X+RTS	390954	M4M 2X Modbus RTS	2CSG239095R4051		
BLE, Modbus TCP/IP	4 Progr. I/O	2X+RTS	391456	M4M 2X Ethernet RTS	2CSG239145R4051		
BLE, Modbus RTU	4 Progr. I/O	2X+PQ1 +RTS	391050	M4M 2X Modbus PQ1+RTS	2CSG239105R4051		
BLE, Modbus TCP/IP	4 Progr. I/O	2X+PQ1 +RTS	391555	M4M 2X Ethernet PQ1+RTS	2CSG239155R4051		
BLE, Modbus RTU	4 Progr. I/O	2X+PQ2 +RTS	391159	M4M 2X Modbus PQ2+RTS	2CSG239115R4051		
BLE, Modbus TCP/IP	4 Progr. I/O	2X+PQ2 +RTS	391654	M4M 2X Ethernet PQ2+RTS	2CSG239165R4051		

Notes

Discover the range
Product overview

Two different D1M product families, D1M 15 and D1M 20, have been commonly designed in order to perfectly fit in a scalable way any monitoring need, with high focus on intuitiveness, quality and common user experience.

All D1M multifunction and power meters are compliant to IEC 61557-12 power metering and monitoring devices (PMD) standard, ensuring reliability of all electrical parameters and power quality KPIs measurements.

D1M range has enlarged product declarations according to EN45545-2 – Fire and Smoke test and IEC 61373 – Shock and Vibration test for railway and rolling stock applications.

NEW

D1M 15
D1M 15 is a complete multifunction meter for electrical system monitoring, mainly targeting measurement of basic electrical parameters.

D1M 20
D1M 20 is a power meter including THD and import/export (4 quadrants) measurement for basic power quality analysis applications such as power factor management and local energy generation monitoring.

Energy efficiency

D1M 15 and D1M 20

Compact design
Only 3 modules width to ensure optimized logistics and reduced footprint in the panel.

Bright display
Simple reading of the measurement data with

3 rows on the LED display.

Remote measurement
Availability of Modbus RTU communication protocol with D1M 15 Modbus and digital output option for easy integration in any system.

Common experience
Same intuitive menu structure all over the different M1M and D1M meters, with 3 pushbuttons keyboard for simplified access to the device.

Electrical system monitoring
Class 1 measurement according to IEC 61557-12 and reliable electrical parameters measurement for basic applications, including voltage, current, frequency, power, energy.

Compact design
Only 3 module width to ensure optimized logistics and reduced footprint in the panel.

Manual-less configuration
Guided wizard for first commissioning helping to save time for the basic configuration.

Intuitive visualization
Clear visualization of the measurements with

self-guided menus on the bright backlit LCD displays.

Remote measurement
Availability of Modbus RTU and Modbus TCP/IP communication protocols and I/O for easy integration in any system.

Power quality measurement
Class 0,5 measurement according to IEC 61557-12 and complete set of power quality features for basic power quality analysis.

Energy efficiency

D1M 15 and D1M 20 - Technical features

	D1M 15	D1M 20
Auxiliary power supply		
Voltage	100-230 V AC/DC ±15%	
Frequency	50 - 60Hz ±5%	
Power consumption	5VA max	
Installation category	CAT III 300V class per IEC 61010-1 edition 3	
Protection fuse	T1 A-277 VAC	
Measurement Accuracy		
IEC 61557-12	IEC 61557-12 PMD/S/K55/1	IEC 61557-12 PMD/S/K55/0.5
Active energy	IEC61557-12 Class 1	IEC61557-12 Class 0.5
	IEC 62053-21 Class 1	IEC 62053-22 Class 0.5S
Reactive energy	IEC 61557-12 Class 2	IEC61557-12 Class 1
	IEC 62053-24 Class 2	IEC 62053-24 Class 1
Active power	IEC 61557-12 Class 1	IEC 61557-12 Class 0.5
Reactive power	IEC 61557-12 Class 2	IEC 61557-12 Class 1
Apparent power	IEC 61557-12 Class 2	IEC 61557-12 Class 1
Voltage	IEC 61557-12 Class 0.5	IEC 61557-12 Class 0.5
Current	IEC 61557-12 Class 0.5	IEC 61557-12 Class 0.5
Frequency	IEC 61557-12 Class 0.1	IEC 61557-12 Class 0.1
Neutral Current (calculated)	-	IEC 61557-12 Class 0.1
Unbalance	-	IEC 61557-12 Class 0.5
THD, Harmonics (current, voltage)	-	IEC 61557-12 Class 5
Voltage Measurement inputs		
Voltage input mode	Direct or Indirect insertion with VT	
Measurement Range	80-300 VAC(L-N)	
Wiring Type	Single-phase, three-phase (3P, 3P+N)	
Rated frequency	50Hz or 60Hz	
Protection fuse	T1 A-277 VAC	
VT primary range	50~750000V	
VT secondary range	50~510V	
Individual harmonics	-	2nd~40th, 0%~50%
Current measurement inputs		
Current input mode	Indirect insertion with CT	
Wiring Type	Single-phase, three-phase (3P, 3P+N)	
CT secondary range	1A or 5A	
Rated frequency	50Hz or 60Hz	
Range without accuracy derating	50mA-5A AC 120%	
CT primary range	1-50000A	
Individual harmonics	-	2nd~40th, 0%~50%

Energy efficiency

D1M 15 and D1M 20 - Technical features

I/O	D1M 15	D1M 20
Digital Input		
Number of channels	-	2
Voltage	-	24 VDC
Frequency	-	<1kHz
Digital Output		
Number of channels	2	2
Voltage	40V DC	24 VAC/DC
Current	≤60 mA DC	≤100 mA DC
Width(Length)	10 ~ 990ms	10 ~ 990ms

Mechanical properties		
Overall Dimensions	89.0mm x 52.5mm x 63.5mm	
IP degree of protection (IEC 60529)	Front: IP51	
	Terminals: IP20	
Max. weight	252g	259g
Fireproof and Heatproof	Terminal 960°C, cover 650°C	
Shock and vibration acc. to IEC 61373	Category 1 - Class A/B	
Fire behavior acc. to EN 45545-2	R26/HL3	

Climatic conditions	
Operating temperature	-5 to 55°C (K55 IEC61557-12)
Relative humidity	≤75% yearly average, ≤95% on 30 days/year
Storage temperature	-25 to 70°C (K55 IEC61557-12)
Altitude	≤2km
Pollution degree	2
Environment	It is prohibited to use in the environment containing H2S, Cl2, NH3 and other harmful gases

Communication protocol		
Modbus RTU	**D1M 15 Modbus**	**D1M 20 Modbus**
Communication interface	RS485 with optical isolation	RS485 with optical isolation
Baud rate	9.6, 19.2, 38.4, 57.6, 115.2 kbps	9.6, 19.2, 38.4, 57.6, 115.2 kbps
Parity number	Odd (1 stop bit), Even (1 stop bit), None (1 or 2 stop bits)	Odd (1 stop bit), Even (1 stop bit), None (1 or 2 stop bits)
Address	1-247	1-247
Connector	3 pole terminals	3 pole terminals
Modbus TCP/IP		**D1M 20 Ethernet**
Communication protocol	-	Modbus TCP/IP
Communication interface	-	RJ45
IP Address	-	DHCP/Manual, default 192.168.1.12
Subnet mask	-	DHCP/Manual, default 255.255.255.0
Gateway	-	DHCP/Manual, default 192.168.1.1
Port		502 fixed

Standards	
Power metering and monitoring devices (PMD)	IEC 61557-12
EMC	IEC 61326-1
Electrical safety	IEC 61010-1
IP degree of protection	IEC 60529

Energy efficiency

D1M 15 and D1M 20 - Comparing two versions

	D1M 15	D1M 20
Accuracy Class (Active energy)	Class 1	Class 0.5
IEC 61557-12	PMD/S/K55/1	PMD/S/K55/0.5
Real-time Measurement		
TRMS Current	•	•
TRMS Voltage	•	•
Frequency	•	•
Active, Reactive and Apparent Power	•	•
Power Factor	•	•
Operating timer, countdown timer	-	•
Energy		
Active, Reactive and Apparent Energy	•	•
Four-quadrant (Import/Export/Net)	•	•
Tariffs	-	•
CO2 of active energy Import	-	•
Currency of active energy Import	-	•
Power quality		
THD (I, VLN, VLL)	-	•
Individual harmonics	-	40th
Unbalances (I, VLN, VLL)	-	•
Neutral current	-	Calculated
Data recording and logs		
Alarms	15	15
Warnings, alarms and errors logs	•	•
Audit logs	Only counter	•
Average/Maximum/Minimum value	-	•
Power outage logs	Only counter	•
RTC	-	•
HMI		
Display	LED	LCD
Password protection	•	•
Connectivity		
Modbus RTU	•	•
Modbus TCP/IP	-	•
I/O	2 Digital outputs	2 Digital inputs, 2 Digital outputs

Energy efficiency

D1M 15 and D1M 20 - Ordering data

D1M 15

Communication Protocol	I/O	Bbn	Order details		Weight (1piece)	Pack unit
		EAN 6941593	Type code	Order code	kg	pc.
-	-/2	481156	D1M 15	2TAZ665050R2000	0,252	1
Modbus RTU	-/2	481163	D1M 15 Modbus	2TAZ665052R2000	0,252	1

D1M 20

Communication Protocol	I/O	Bbn	Order details		Weight (1piece)	Pack unit
		EAN 6941593	Type code	Order code	kg	pc.
Modbus RTU	2/2	481170	D1M 20 Modbus	2TAZ665052R2001	0,259	1
Modbus TCP/IP	2/2	481187	D1M 20 Ethernet	2TAZ665054R2000	0,259	1

Energy efficiency

IP Switches

IS/S 8.1.1

IP Switch, 8 Ports, Fast Ethernet, MDRC **NEW**

The IP Switch is an industrial-grade, 8 Ports, Fast Ethernet (100 Mbit/s), unmanaged switch with plug-and-play capabilities, designed for installation in electrical distribution boards and small housings for rapid mounting on 35mm DIN rails (to EN 60715).

Description	Mod. width	Order details		Weight 1 piece	Pack unit
		Type code	Order code	kg	pc.
	8	IS/S 8.1.1	2CDG120082R0011	0.25	1

ISP/S 8.1.1.1

IP Switch PoE, 8 Ports, Fast Ethernet, 55W, MDRC **NEW**

The IP Switch PoE is an industrial-grade, 8 Ports, Fast Ethernet (100 Mbit/s), PoE (55 W), unmanaged switch with plug-and-play capabilities, designed for installation in electrical distribution boards and small housings for rapid mounting on 35mm DIN rails (to EN 60715).

Description	Mod. width	Order details		Weight 1 piece	Pack unit
		Type code	Order code	kg	pc.
	12	ISP/S 8.1.1.1	2CDG120083R0011	0.41	1

Notes

Energy meters

The details that make the difference

NEW

Sealing points.

Made of 70% recycled plastic. Up to -50% reduced weight. Compact dimension: 1 DIN module (D11) 3 DIN modules (D13).

Direct connection up to 40A (D11 15) and up to 65A (D13 15).

1 Digital Input and 1 Digital Output.

Modbus or Mbus communication.

6-digit display with dual line reading for partial register reading.

QR code to the webpage with simplified access to technical documentation.

1 Digital Input and 1 Digital Output.

7-digit display with dual line reading for partial register reading.

MID approved with Class B accuracy.
2% accuracy on reactive energy.

Modbus or Mbus communication.

Energy meters

Selection framework

The below framework is designed to streamline the process of choosing the right energy meter tailored to individual needs. By considering factors such as accuracy of energy measurement and desired features, the framework guides customers towards optimal selections. With a focus on accuracy, efficiency, and compatibility, users can confidently identify the perfect energy meter solution for their residential, commercial, or industrial requirements.

	STEEL	BRONZE	15 NEW	SILVER	GOLD	PLATINUM
Active energy	✓	✓	✓	✓	✓	✓
Class 1	✓	✓	✓	✓	✓	✓
Class 0.5				Optional	Optional	Optional
Pulse output	✓	✓	✓	✓	✓	✓
Alarm	✓	✓	✓	✓	✓	✓
Reactive energy		✓	✓	✓	✓	✓
Apparent energy		✓	✓	✓	✓	✓
Import/Export energy		✓	✓	✓	✓	✓
Tariffs			2/4* *4 via Communication	4	4	4
Resettable energy register			✓	✓	✓	✓
Fixed I/O			1DI/1DO	2DI/2DO	2DI/2DO	2DI/2DO
Configurable I/O						4
Harmonics						2-16th
Clock functions*					✓	✓
Advanced clock functions**						✓

* Tariff control, previous values, max/min demand, event log - ** Load profiles

D11 and D13

NEW

available in: 15

voltage: 220-240 VAC
3x230/400 VAC

D11	Single phase, up to 40A
D13	Three phase, up to 65A

A series

available in: STEEL BRONZE SILVER GOLD PLATINUM

voltage: 57.7...288 VAC
57.7.../100...288 VAC
3x57.7/100 ... 288/500 VAC
3x57.7/100 ... 400/690 VAC

A41	Single phase, up to 80A
A42	Single phase, with CT/VT
A43	Three phase, up to 80A
A44	Three phase, with CT/VT

B series

available in: STEEL BRONZE SILVER

voltage: 220-240 VAC
3x230/400 VAC

B21	Single phase, up to 65A
B23	Three phase, up to 65A
B24	Three phase, with CT

Energy meters

Functionalities

NEW

	Single phase - Direct			Single phase - Indirect
Energy Meters	**D11**	**B21**	**A41**	**A42**
Mechanical properties				
DIN modules	1	2	4	4
Overall Dimensions [mm]	65x92x17,5	35x97x65	70x97x65	70x97x65
Voltage/current inputs				
Operating voltage	220 - 240 VAC +/- 20%	220 - 240 VAC +/- 20%	57.7 - 288 VAC	57.7 - 288 VAC
Maximum current	40 A	65 A	80 A	6A
Rated frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Indirect connection	-	-	-	CT/VT
Energy Measurements				
Active energy	■	■	■	■
Reactive energy	■	■	□	□
Apparent energy	■	■	□	□
Import/Export	■	■	□	□
Instantaneous Measurements				
Voltage	■	■	■	■
Current	■	■	■	■
Neutral Current (calculated)	■	■	■	■
Frequency	■	■	■	■
Active, Reactive and Apparent power	■	■	■	■
Power quality measurements				
Power Factor	■	■	■	■
CosPhi	■	■	□	□
Current quadrant	■	■	■	■
Harmonics analysis (2-16th)	-	-	□	□
Function				
Tariffs	■	■	□	□
Single Alarms	25	25	25	25
Max/Min demand	-	■	□	□
Load profiles	-	-	□	□
Resettable registers	■	■	□	□
Event logs	■	-	□	□
Communication				
Digital Input	1	2	2 (□)	2 (□)
Digital Output	1	2	2 (□)	2 (□)
Configurable I/O	-	■	■	■
Pulse output	■	■	■	■
Progr. I/O (4 I/O channels)	-	-	-	□
Infrared MBus	-	■	■	■
MBus	□	□	□	□
RS-485 Modbus RTU	□	□	□	□

■ Standard feature
□ Optional feature according to order codes in the following pages
- No

NEW

	Three phase - Direct			Three phase - Indirect	
	D13	**B23**	**A43**	**B24**	**A44**
	3	4	7	4	7
	65x97x52,5	70x97x65	123x97x65	70x97x65	123x97x65
	3 x 220-240 VAC +/- 20%	3 x 220-240 VAC +/- 20%	3x57.7-288/100-500 VAC	3 x 220-240 VAC +/- 20%	3x57.7-288/100-500 VAC (3x57.7-400/100-690VAC
	65 A	65 A	80 A	6A	6A
	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
	-	-	-	CT	CT/VT
	■	■	■	■	■
	■	■	□	□	□
	■	■	□	□	□
	■	■	□	□	□
	■	■	■	■	■
	■	■	■	■	■
	■	■	■	■	■
	■	■	■	■	■
	■	■	■	■	■
	■	■	■	■	■
	■	■	□	□	□
	■	■	■	■	■
	-	-	□	-	□
	■	■	□	□	□
	25	25	25	25	25
	-	■	□	-	□
	-	-	□	-	□
	■	□	□	□	□
	■	-	□	-	□
	1	2	2 (□)	2 (□)	2 (□)
	1	2	2 (□)	2 (□)	2 (□)
	-	■	■	-	■
	■	■	■	■	■
	-	-	□	-	□
	-	■	■	■	■
	□	□	□	□	□
	□	□	□	□	□

Single phase – Direct Energy meters

Technical features

NEW

	Single phase - Direct		
Energy Meters	**D11**	**B21**	**A41**
Mechanical			
Material	Housing and terminal covers: up to 70% recycle plastic. Frontal Panel: UV resistant Polyester	Polycarbonate in transparent front glass. Glass reinforced polycarbonate in bottom case and upper case. Polycarbonate in terminal cover.	Polycarbonate in transparent front glass. Glass reinforced polycarbonate in bottom case and upper case. Polycarbonate in terminal cover.
Accuracy			
Active Energy	Cl.1 (Class B)	Cl.1 (Class B)	Cl.1 (Class B)
Reactive energy	Cl.2	Cl.2	Cl.2
Voltage/Current Inputs			
Protection fuse/MCB	40 A MCB, C characteristic or 40 A fuse type gL-gG	65 A MCB, C characteristic or 65A fuse type gL-gG	80 A MCB, C characteristic or 80 A fuse type gL-gG
Nominal voltage	220 - 240 VAC	230 VAC	230 VAC
Voltage range	220 - 240 VAC +/- 20%	220–240 VAC (-20% – +15%)	220–240 VAC (-20% – +15%)
Power consumption (240V - Measurement+Comm+Backlight)	0.69 W	0.88 W	0.6 W
Base current Ib	5A	5A	5A
Reference current Iref	5A	5A	5A
Transitional current Itr	0.5 A	0.5 A	0.5 A
Nominal Current	5A	5A	5A
Maximum current Imax	40 A	65 A	80A
Minimum current Imin	0.25 A	0.25 A	0.25 A
Starting current Ist	< 20 mA	< 20 mA	< 20 mA
Frequency	50/60 Hz ± 5%	50/60 Hz ± 5%	50/60 Hz ± 5%
Meter constant	1.000 imp/kWh	1.000 imp/kWh	1.000 imp/kWh
Wiring options			
	1 Phase – 2 Wires	1 Phase – 2 Wires	1 Phase – 2 Wires
Protective class	II	II	II
Overvoltage category	III	III	III
Pollution degree	2	2	2
Rated impulse voltage Uimp	6 kV	6 kV	6 kV
Utilization category (UC)	UC-1	UC-2	UC-2

Single phase – Direct Energy meters

Technical features

NEW

		Single phase - Direct		
Energy Meters		**D11**	**B21**	**A41**
Technical features				
Line terminals	Min. wire cross section	1 mm²	1 mm²	1 mm²
	Max. wire cross section	10 mm²	25 mm²	25 mm²
	Screw head	PZ1	PZ2	Ph2
	Tightening torque	0,8 Nm	3Nm	3Nm
	Wire stripping lenght	6 mm	13 mm	13 mm
Neutral terminal	Min. wire cross section	1 mm²	1 mm²	1 mm²
	Max. wire cross section	10 mm²	25 mm²	25 mm²
	Screw head	PZ1	PZ2	Ph2
	Tightening torque	0,8 Nm	3Nm	3Nm
	Wire stripping lenght	6 mm	13 mm	13 mm
Communication and I/O terminals	Min. wire cross section	0,2 mm²	0,5 mm²	0,5 mm²
	Max. wire cross section	2,5 mm²	1 mm²	1 mm²
	Screw head	PZ1	slotted screw	slotted screw
	Tightening torque	0,5 Nm	0,25 Nm	0,25 Nm
	Wire stripping lenght	6 mm	6 mm	6 mm
Climatic condition				
Operating temperature		-40°C to +70°C	-40°C to +70°C	-40°C to +70°C
Storage temperature		-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Environmental conditions, operation		Indoor with extended operating temperature; dry locations		
Altitude		2.000 m		
Humidity		75% yearly average, 95% on 30 days/year		
Resistance to fire and heat		Terminal 960°C, cover 650°C (IEC 60695-2-1) – UL V0		
Resistance to water and dust		IP 20 on terminal block without protective enclosure and IP 51 in protective enclosure, according to IEC 60529.		
Mechanical environment		Class M2 in accordance with the Measuring Instrument Directive. (MID), (2014/32/EU).		
Electromagnetic environment		Class E2 in accordance with the Measuring Instrument Directive. (MID), (2014/32/EU).		

Single phase – Direct Energy meters

Technical features

NEW

	Single phase - Direct		
Energy Meters	**D11**	**B21**	**A41**
User interface			
Access to device	1 pushbuttons	3 pushbuttons	5 pushbuttons
Display type	Dual line display LCD	Single line LCD	Single line LCD
	Configurable backlight	Fixed backlight	Fixed backlight
Display dimensions	23,3x10,5 mm, ~ 1" as diagonal	19 x 22 mm, 1,1" as diagonal	32 x 22,5 mm, 1,8" as diagonal
Number of digits counter 1	6 digits	6 digits	7 digits
Number of digits counter 2	4 digits	-	-
I/O			
Digital Output			
Number of output	1	2 (Optional)	2 (Optional)
Current	2 - 60mA	2 - 100mA	2 - 100mA
Voltage	5 - 40 VDC (+/-10%)	5 - 240 V AC/DC. For meters with only 1 output 5 - 40 VDC	5 - 240 V AC/DC. For meters with only 1 output 5 - 40 VDC
Pulse output frequency	Programmable 1–999999 imp/kWh	Programmable 1–999999 imp/kWh	Programmable 1–999999 imp/kWh
Pulse length	10–990 ms	10–990 ms	10–990 ms
Digital Input			
Number of input	1	2 (Optional)	2 (Optional)
Max Voltage (absolute rating)	44 VDC	0 - 240 V AC/DC	0 - 240 V AC/DC
Off state Voltage	0 - 5 VDC (+/-10%)	0 - 5 V AC/DC	0 - 5 V AC/DC
ON state Voltage	10 - 40 VDC (+/-10%)	57 - 240 VAC / 24 - 240 VDC	57 - 240 VAC / 24 - 240 VDC
Min. pulse length and pulse pause	30 ms	30 ms	30 ms
Communication protocol			
M-Bus			
Baud rate	300, 600, 1200, 2400, 4800, 9600	300, 600, 1200, 2400, 4800, 9600, 19200, 38400	300, 600, 1200, 2400, 4800, 9600, 19200, 38400
Address	1-250	1-250	1-250
Access level	Open, Open with password, close	Open, Open with password, close	Open, Open with password, close
Modbus RTU			
Baud rate	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
Parity	Odd, Even, None	Odd, Even, None	Odd, Even, None
Address	1-247	1-247	1-247
Pulse Led			
Pulse Frequency	1000 imp/kWh	1000 imp/kWh	1000 imp/kWh
Pulse length	40 ms	40 ms	40 ms

Single phase – Direct Energy meters

Technical features

NEW

		Single phase - Direct	
Energy Meters	**D11**	**B21**	**A41**
EMC Compatability			
Impulse voltage test		6 kV 1.2/50µs (IEC 60060-1)	
Surge voltage test		4 kV 1.2/50µs (IEC 61000-4-5)	
Fast transient burst test		4 kV (IEC 61000-4-4)	
Immunity to electromagnetic HF-fields		80 MHz–2 GHz at 10 V/m (IEC 61000-4-3)	
Immunity to conducted disturbance		150kHz–80MHz, (IEC 61000-4-6)	
Immunity to electromagnetic disturbances		2–150 kHz for kWh-meters	
Radio frequency emission		EN 55022, class B (CISPR22)	
Electrostatic discharge		15 kV (IEC 61000-4-2)	
Standard	EN 50470-3:2022 (Only for MID meters)	IEC 62052-11	IEC 62052-11
	EN IEC 62052-11:2021/A11:2022	IEC 62053-21 class 1 & 2	IEC 62053-21 class 1 & 2
	IEC 62052-31:2015-09	IEC 62053-22 class 0,5 S	IEC 62053-22 class 0,5 S
	EN 62052-31:2016-06	IEC 62053-23 class 2	IEC 62053-23 class 2
	EN 62052-31:2018-04	IEC 62054-21	IEC 62054-21
	EN IEC 62053-21/A11:2021	GB/T 17215.211-2006	GB/T 17215.211-2006
	EN IEC 62053-23/A11:2021	GB/T 17215.312-2008 class 1 & 2	GB/T 17215.312-2008 class 1 & 2
	EN IEC 62053-23:2022:02	GB/T 17215.322-2008 class 0,5 S	GB/T 17215.322-2008 class 0,5 S
	EN 62059-32-1:2012	GB 4208-2008	GB 4208-2008
	CISPR 32:2015 Class B	EN 50470-1	EN 50470-1
	Welmec Guide 11.1	EN 50470-3 category A & B	EN 50470-3 category A & B
	Welmec Guide 7.2		

Single phase – Direct Energy meters

Product codes

D11

Single phase electricity meter, 1DIN, 40A, 220 VAC-240VAC.
Class B (Cl.1) (Reactive Cl.2) with functionality level 15.
Active and Reactive energy, Import/export, 2 single tariffs or 4 (via communication)

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 8012542	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
-	-	1 Dig. Input 1 Dig Output	Cl. 1 - Active Cl. 2 - Reactive	635550	**D11 15 40**	2CMA241655R1000	0.070	1
-	MID	1 Dig. Input 1 Dig Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	635451	**D11 15-M 40**	2CMA241645R1000	0.070	1
Modbus RTU	-	1 Dig. Input 1 Dig. Output	Cl. 1 - Active Cl. 2 - Reactive	635758	**D11 15 40 Modbus**	2CMA241675R1000	0.070	1
Modbus RTU	MID	1 Dig. Input 1 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 – Reactive	635659	**D11 15-M 40 Modbus**	2CMA241665R1000	0.070	1
Mbus	MID	1 Dig. Input 1 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	635857	**D11 15-M 40 Mbus**	2CMA241685R1000	0.070	1

B21

Single phase electricity meter, 2DIN with IR Port, 65A, 230VAC

For direct connection up to 65 A. Class B (Cl. 1) (Reactive Cl. 2) with functionality level Silver.
Active and reactive energy, import/export, tariffs 1-4, tariff controll via inputs and communication.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 8012542	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
-	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	001540	**B21 311 - 100**	2CMA100154R1000	0.140	1
Modbus RTU	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	001557	**B21 312 - 100**	2CMA100155R1000	0.150	1
Mbus	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	001564	**B21 313 - 100**	2CMA100156R1000	0.150	1

Single phase – Direct Energy meters

Product codes

A41

Single phase electricity meter, 4DIN with IR Port, 80A, 57.7...288VAC

Class B (Cl. 1) with functionality level Steel. Active energy

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
-	MID	1 Dig Input 1 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705547	**A41 111 - 100**	2CMA170554R1000	0.230	1
Modbus RTU	MID	1 Dig Input 1 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705004	**A41 112 - 100**	2CMA170500R1000	0.230	1
Mbus	MID	1 Dig Input 1 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	002400	**A41 113 - 100**	2CMA100240R1000	0.230	1

Class 1 (Reactive Class 2) with functionality level Silver.
Active and reactive energy, import/export, tariffs 1-4, tariff controll via inputs and communication.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) - Active Cl.2- Reactive	705035	**A41 312 - 100**	2CMA170503R1000	0.230	1
Mbus	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705042	**A41 313 - 100**	2CMA170504R1000	0.230	1

Class B (Cl. 1) (Reactive Cl. 2) with functionality level Gold. Active and reactive energy, import/export, tariffs 1-4, tariff controlled via inputs, communication or clock, previous values, max and min demand.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705059	**A41 412 - 100**	2CMA170505R1000	0.230	1

Single phase – Indirect Energy meters

Technical features

	Single phase - Indirect
	A42
Mechanical	
Material	Polycarbonate in transparent front glass. Glass reinforced polycarbonate in bottom case and upper case. Polycarbonate in terminal cover.
Accuracy	
Active Energy	Cl.1 (Class B) or Cl. 0,5S
Reactive energy	Cl.2
Voltage/Current Inputs	
Protection fuse/MCB	10 A MCB, B characteristic or Diazed, fast.
Nominal voltage	230 VAC
Voltage range	
Power consumption (240V - Measurement+Comm+Backlight)	0.61 W
Base current Ib	5A
Rated Current	1A
Reference current Iref	1A
Transitional current Itr	0.05
Nominal Current	1A
Maximum current Imax	6A
Minimum current Imin	0.02 A
Starting current Ist	< 1 mA
Frequency	50/60 Hz ± 5%
Meter constant	1.000 imp/kWh
Wiring options	1 Phase – 2 Wires
Protective class	II
Overvoltage category	III
Pollution degree	2
Rated impulse voltage Uimp	6kV
Utilization category (UC)	UC-1

Single phase – Indirect Energy meters

Technical features

		Single phase - Indirect
		A42
Terminal characteristics		
Line terminals	Min. wire cross section	0,5 mm²
	Max. wire cross section	10 mm²
	Screw head	Ph2
	Tightening torque	1.5 Nm
	Wire stripping lenght	13 mm
Neutral terminal	Min. wire cross section	0,5 mm²
	Max. wire cross section	10 mm²
	Screw head	Ph2
	Tightening torque	1.5 Nm
	Wire stripping lenght	13 mm
Communication and I/O terminals	Min. wire cross section	0,5 mm²
	Max. wire cross section	1 mm²
	Screw head	slotted screw
	Tightening torque	0,25 Nm
	Wire stripping lenght	6 mm
Climatic condition		
Operating temperature		-40°C to +70°C
Storage temperature		-40°C to +85°C
Environmental conditions, operation		Indoor with extended operating temperature; dry locations
Altitude		2000 m
Humidity		75% yearly average, 95% on 30 days/year
Resistance to fire and heat		Terminal 960°C, cover 650°C (IEC 60695-2-1) – UL V0
Resistance to water and dust		IP 20 on terminal block without protective enclosure and IP 51 in protective enclosure, according to IEC 60529.
Mechanical environment		Class M2 in accordance with the Measuring Instrument Directive. (MID), (2014/32/EU).
Electromagnetic environment		Class E2 in accordance with the Measuring Instrument Directive. (MID), (2014/32/EU).
User interface		
Access to device		5 pushbuttons
Display type		Single line LCD
		Fixed backlight
Display Dimensions		32 x 22,5 mm, 1,8” as diagonal
Number of digits counter 1		7 digits
I/O		
Digital Output		
Number of output		2 (Optional)
Current		2 - 100mA
Voltage		5 - 240 V AC/DC. For meters with only 1 output 5 - 40 VDC
Pulse output frequency		Programmable 1–999999 imp/kWh
Pulse length		10–990 ms

Single phase – Indirect Energy meters

Technical features

	Single phase - Indirect
	A42
Digital Input	
Number of input	2 (Optional)
Max Voltage (absolute rating)	0 - 240 V AC/DC
Off state Voltage	0 - 5 V AC/DC
ON state Voltage	57 - 240 VAC / 24 - 240 VDC
Min. pulse length and pulse pause	30 ms
Communication protocol	
M-Bus	
Baud rate	300, 600, 1200, 2400, 4800, 9600, 19200, 38400
Address	1-250
Access level	Open, Open with password, close
Modbus RTU	
Baud rate	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
Parity	Odd, Even, None
Address	1-247
Pulse Led	
Pulse Frequency	5000 imp/kWh
Pulse length	40 ms
EMC Compatability	
Impulse voltage test	6 kV 1.2/50µs (IEC 60060-1)
Surge voltage test	4 kV 1.2/50µs (IEC 61000-4-5)
Fast transient burst test	4 kV (IEC 61000-4-4)
Immunity to electromagnetic HF-fields	80 MHz–2 GHz at 10 V/m (IEC 61000-4-3)
Immunity to conducted disturbance	150kHz–80MHz, (IEC 61000-4-6)
Immunity to electromagnetic disturbances	2–150 kHz for kWh-meters
Radio frequency emission	EN 55022, class B (CISPR22)
Electrostatic discharge	15 kV (IEC 61000-4-2)
Standard	
	IEC 62052-11
	IEC 62053-21 class 1 & 2
	IEC 62053-22 class 0,5 S
	IEC 62053-23 class 2
	IEC 62054-21
	GB/T 17215.211-2006
	GB/T 17215.312-2008 class 1 & 2
	GB/T 17215.322- 2008 class 0,5 S
	GB 4208-2008
	EN 50470-1
	EN 50470-3 category A & B

Single phase – Indirect Energy meters

Product codes

A42

Single phase electricity meter, 4DIN with IR Port, 6A, 57.7...288VAC

Class B (Cl. 1) with functionality level Steel. Active energy

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
-	MID	1 Dig Input 1 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705554	**A42 111 - 100**	2CMA170555R1000	0.200	1
Modbus RTU	MID	1 Dig Input 1 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705103	**A42 112 - 100**	2CMA170510R1000	0.200	1
Mbus	MID	1 Dig Input 1 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	002424	**A42 113 - 100**	2CMA100242R1000	0.200	1

Class 1 (Reactive Class 2) with functionality level Silver.
Active and reactive energy, import/export, tariffs 1-4, tariff controll via inputs and communication.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) - Active Cl.2- Reactive	705127	**A42 312 - 100**	2CMA170512R1000	0.200	1

Class B (Cl. 1) (Reactive Cl. 2) with functionality level Gold. Active and reactive energy, import/export, tariffs 1-4, tariff controlled via inputs, communication or clock, previous values, max and min demand.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	4 Configurable I/O	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	002387	**A42 552 - 100**	2CMA100238R1000	0.200	1
Modbus RTU	MID	4 Configurable I/O	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	705189	**A42 552 - 120**	2CMA170518R1000	0.200	1
Mbus	MID	4 Configurable I/O	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	705196	**A42 553 - 120**	2CMA170519R1000	0.200	1

Three phase – Direct Energy meters

Technical features

NEW

	Three phase - Direct		
Energy Meters	**D13**	**B23**	**A43**
Material	Housing and terminal covers: up to 70% recycle plastic Frontal Panel: UV resistant Polyester	Polycarbonate in transparent front glass. Glass reinforced polycarbonate in bottom case and upper case. Polycarbonate in terminal cover.	Polycarbonate in transparent front glass. Glass reinforced polycarbonate in bottom case and upper case. Polycarbonate in terminal cover.
Accuracy			
Active Energy	Cl.1 (Class B)	Cl.1 (Class B)	Cl.1 (Class B)
Reactive energy	Cl.2	Cl.2	Cl.2
Voltage/Current Inputs			
Protection fuse/MCB	65 A MCB, C characteristic or 65 A fuse type gL-gG	65 A MCB, C characteristic or 65 A fuse type gL–gG	80 A MCB, C characteristic or 80 A fuse type gL-gG
Nominal voltage	220/380 VAC 240/415 VAC	3x230/400 VAC	3x230/400 V AC
Voltage range	3 x 220-240 VAC +/- 20%	3x220–240 VAC (-20% – +15%)	3x57.7-288/100-500 V AC (-20%-+15%)
Power consumption (240V - Measurement+Comm+Backlight)	0.82 W	1.24 W	0.79 W
Base current Ib	5A	5A	5A
Reference current Iref	5A	5A	5A
Transitional current Itr	0.5 A	0.5 A	0.5 A
Nominal Current	5A	5A	5A
Maximum current Imax	65 A	65 A	80A
Minimum current Imin	0.25 A	0.25 A	0.25 A
Starting current Ist	< 20 mA	< 20 mA	< 20 mA
Frequency	50/60 Hz ± 5%	50/60 Hz ± 5%	50/60 Hz ± 5%
Meter constant	1.000 imp/kWh	1.000 imp/kWh	1.000 imp/kWh
Wiring options	3 Phases – 4 Wires	3 Phases – 4 Wires	3 Phases – 4 Wires
	3 Phases – 3 Wires	3 Phases – 3 Wires	3 Phases – 3 Wires
	2 Phase - 2 Wires (not MID)		
	1 Phase (Line 1) – 2 Wires	1 Phase (Line 1) – 2 Wires	1 Phase (Line 1) – 2 Wires
Protective class	II	II	II
Overvoltage category	III	III	III
Pollution degree	2	2	2
Rated impulse voltage Uimp	6 kV	6 kV	6 kV
Utilization category (UC)	UC-2	UC-2	UC-2

Three phase – Direct Energy meters

Technical features

NEW

		Three phase - Direct		
Terminal characteristics		**D13**	**B23**	**A43**
Line terminals	Min. wire cross section	1 mm²	1 mm²	2.5 mm²
	Max. wire cross section	25 mm²	25 mm²	25 mm²
	Screw head	PZ2	PZ2	Ph2
	Tightening torque	2 Nm	3 Nm	4.5 Nm
	Wire stripping lenght	13 mm	13 mm	13 mm
Neutral terminal	Min. wire cross section	2 x 1 mm²	1 mm²	2.5 mm²
	Max. wire cross section	2 x 25 mm²	25 mm²	25 mm²
	Screw head	PZ2	PZ2	Ph2
	Tightening torque	2 Nm	3Nm	4.5 Nm
	Wire stripping lenght	13 mm	13 mm	13 mm
Communication and I/O terminals	Min. wire cross section	0,2 mm²	0,5 mm²	0,5 mm²
	Max. wire cross section	2,5 mm²	1 mm²	1 mm²
	Screw head	PZ1	slotted screw	slotted screw
	Tightening torque	0,5 Nm	0,25 Nm	0,25 Nm
	Wire stripping lenght	6 mm	6 mm	6 mm
Climatic condition				
Operating temperature		-40°C to +70°C		
Storage temperature		-40°C to +85°C		
Environmental conditions, operation		Indoor with extended operating temperature; dry locations		
Altitude		2000 m		
Humidity		75% yearly average, 95% on 30 days/year		
Resistance to fire and heat		Terminal 960°C, cover 650°C (IEC 60695-2-1) – UL V0		
Resistance to water and dust		IP 20 on terminal block without protective enclosure and IP 51 in protective enclosure, according to IEC 60529.		
Mechanical environment		Class M2 in accordance with the Measuring Instrument Directive. (MID), (2014/32/EU).		
Electromagnetic environment		Class E2 in accordance with the Measuring Instrument Directive. (MID), (2014/32/EU).		

Three phase – Direct Energy meters

Technical features

NEW

	Three phase - Direct		
Energy Meters	**D13**	**B23**	**A43**
User interface			
Access to device	3 pushbuttons	3 pushbuttons	5 pushbuttons
Display type	Dual line display LCD	Single line LCD	Single line LCD
	Configurable backlight	Fixed backlight	Fixed backlight
Display dimensions	36 x 21,1 mm, ~ 1,6” as diagonal	32 x 22,5 mm, 1,8” as diagonal	32 x 22,5 mm, 1,8” as diagonal
Number of digits counter 1	7 digits	7 digits	7 digits
Number of digits counter 2	5 digits	-	-
I/O			
Digital Output			
Number of output	1	2 (Optional)	2 (Optional)
Current	2 - 60mA	2 - 100mA	2 - 100mA
Voltage	5 - 40 VDC (+/-10%)	5 - 240 V AC/DC. For meters with only 1 output 5 - 40 VDC	5 - 240 V AC/DC. For meters with only 1 output 5 - 40 VDC
Pulse output frequency	Programmable 1–999999 imp/kWh	Programmable 1–999999 imp/kWh	Programmable 1–999999 imp/kWh
Pulse length	10–990 ms	10–990 ms	10–990 ms
Digital Input			
Number of input	1	2 (Optional)	2 (Optional)
Max Voltage (absolute rating)	44 VDC	0 - 240 V AC/DC	0 - 240 V AC/DC
Off state Voltage	0…5 VDC (+/-10%)	0 - 5 V AC/DC	0 - 5 V AC/DC
ON state Voltage	10…40 VDC (+/-10%)	57 - 240 VAC / 24 - 240 VDC	57 - 240 VAC / 24 - 240 VDC
Min. pulse length and pulse pause	30 ms	30 ms	30 ms
Communication protocol			
M-Bus			
Baud rate	300, 600, 1200, 2400, 4800, 9600	300, 600, 1200, 2400, 4800, 9600, 19200, 38400	300, 600, 1200, 2400, 4800, 9600, 19200, 38400
Address	1-250	1-250	1-250
Access level	Open, Open with password, close	Open, Open with password, close	Open, Open with password, close
Modbus RTU			
Baud rate	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
Parity	Odd, Even, None	Odd, Even, None	Odd, Even, None
Address	1-247	1-247	1-247
Pulse Led			
Pulse Frequency	1000 imp/kWh	1000 imp/kWh	5000 imp/kWh
Pulse length	40 ms	40 ms	40 ms

Three phase – Direct Energy meters

Technical features

NEW

		Three phase - Direct	
Terminal characteristics	**D13**	**B23**	**A43**
EMC Compatability			
Impulse voltage test		6 kV 1.2/50µs (IEC 60060-1)	
Surge voltage test		4 kV 1.2/50µs (IEC 61000-4-5)	
Fast transient burst test		4 kV (IEC 61000-4-4)	
Immunity to electromagnetic HF-fields		80 MHz–2 GHz at 10 V/m (IEC 61000-4-3)	
Immunity to conducted disturbance		150kHz–80MHz, (IEC 61000-4-6)	
Immunity to electromagnetic disturbances		2–150 kHz for kWh-meters	
Radio frequency emission		EN 55022, class B (CISPR22)	
Electrostatic discharge		15 kV (IEC 61000-4-2)	
Standard	EN 50470-3:2022 (Only for MID meters)	IEC 62052-11	IEC 62052-11
	EN IEC 62052-11:2021/A11:2022	IEC 62053-21 class 1 & 2	IEC 62053-21 class 1 & 2
	IEC 62052-31:2015-09	IEC 62053-22 class 0,5 S	IEC 62053-22 class 0,5 S
	EN 62052-31:2016-06	IEC 62053-23 class 2	IEC 62053-23 class 2
	EN 62052-31:2018-04	IEC 62054-21	IEC 62054-21
	EN IEC 62053-21/A11:2021	GB/T 17215.211-2006	GB/T 17215.211-2006
	EN IEC 62053-23/A11:2021	GB/T 17215.312-2008 class 1 & 2	GB/T 17215.312-2008 class 1 & 2
	EN IEC 62053-23:2022:02	GB/T 17215.322-2008 class 0,5 S	GB/T 17215.322-2008 class 0,5 S
	EN 62059-32-1:2012	GB 4208-2008	GB 4208-2008
	CISPR 32:2015 Class B	EN 50470-1	EN 50470-1
	Welmec Guide 11.1	EN 50470-3 category A & B	EN 50470-3 category A & B
	Welmec Guide 7.2		

Three phase – Direct Energy meters

Product codes

D13

Three phase electricity meter, 3DIN, 65A, 3 x 220/240 VAC,
Class B (Cl.1) (Reactive Cl.2) with functionality level 15.
Active and Reactive energy, Import/export, 2 single tariffs or 4(via communication)

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 8012542	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
-	-	1 Dig. Input 1 Dig. Output	Cl. 1 - Active Cl. 2 – Reactive	636052	**D13 15 65**	2CMA241725R1000	0.249	1
-	MID	1 Dig. Input 1 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 – Reactive	635956	**D13 15-M 65**	2CMA241695R1000	0.249	1
Modbus RTU	MID	1 Dig. Input 1 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 – Reactive	636151	**D13 15-M 65 Modbus**	2CMA241765R1000	0.249	1
Mbus	MID	1 Dig. Input 1 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 – Reactive	636359	**D13 15-M 65 Mbus**	2CMA241845R1000	0.249	1

B23

Three phase electricity meter, 4DIN with IR Port, 65A, 3 x 230/400 VAC

Class B (Cl. 1) (Reactive Cl. 2) with functionality level Silver.
Active and reactive energy, import/export, tariffs 1-4, tariff controll via inputs and communication.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
-	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) – Active Cl. 2 – Reactive	001687	**B23 311 - 100**	2CMA100168R1000	0.330	1
Modbus RTU	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) – Active Cl. 2 – Reactive	001694	**B23 312 - 100**	2CMA100169R1000	0.340	1
Mbus	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) – Active Cl. 2 – Reactive	001700	**B23 313 - 100**	2CMA100170R1000	0.350	1

Three phase – Direct Energy meters

Product codes

A43

Three phase electricity meter, 7DIN with IR Port, 80A, 3 x 57.7/100...288/500 VAC

Class B (Cl. 1) with functionality level Steel. Active energy

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
-	MID	Pulse Output	Cl.B (Cl.1) - Active	705202	**A43 111 - 100**	2CMA170520R1000	0.440	1
Modbus RTU	MID	Pulse Output	Cl.B (Cl.1) - Active	002448	**A43 112 - 100**	2CMA100244R1000	0.440	1
Mbus	MID	Pulse Output	Cl.B (Cl.1) - Active	002455	**A43 113 - 100**	2CMA100245R1000	0.440	1

Class B (Cl. 1) (Reactive Cl. 2) with functionality level Bronze. Active and reactive energy, import/export.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	Pulse Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705226	**A43 212 - 100**	2CMA170522R1000	0.440	1
Mbus	MID	Pulse Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705233	**A43 213 - 100**	2CMA170523R1000	0.440	1

Class B (Cl. 1) (Reactive Cl. 2) with functionality level Silver. Active and reactive energy, import/export, tariffs 1-4, tariff controll via inputs and communication.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705257	**A43 312 - 100**	2CMA170525R1000	0.440	1
Mbus	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705264	**A43 313 - 100**	2CMA170526R1000	0.440	1

Class B (Cl. 1) (Reactive Cl. 2) with functionality level Platinum. Active and reactive energy, import/export, tariffs 1-4, tariff controlled via inputs, communication or clock, previous values, max and min demand, advanced load profiles, harmonics and THD.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	Configurable 4 I/O	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705318	**A43 512 - 100**	2CMA170531R1000	0.440	1
Mbus	MID	Configurable 4 I/O	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705325	**A43 513 - 100**	2CMA170532R1000	0.440	1

Three phase – Indirect Energy meters

Technical features

	Three phase - Indirect	
Terminal characteristics	**B24**	**A44**
Mechanical		
Material	Polycarbonate in transparent front glass. Glass reinforced polycarbonate in bottom case and upper case. Polycarbonate in terminal cover.	Polycarbonate in transparent front glass. Glass reinforced polycarbonate in bottom case and upper case. Polycarbonate in terminal cover.
Accuracy		
Active Energy	Cl.1 (Class B) or Cl. 0,5S	Cl.1 (Class B) or Cl. 0,5S
Reactive energy	Cl.2	Cl.2
Voltage/Current Inputs		
Protection fuse/MCB	10 A MCB, B characteristic or Diazes, fast.	10 A MCB, B characteristic or Diazed, fast.
Nominal voltage	3x230/400 VAC	3x230/400 V AC
Voltage range	3x220–240 VAC (-20% – +15%)	3x57.7-400/100-690 V AC (-20% - + 15%) on A44 xxx-x1x 3x57.7-288/100-500 V AC (-20% - + 15%) on all other types
Power consumption (240V - Measurement+Comm+Backlight)	1.18 W	0.96 W
Rated Current	1A	1A
Reference current Iref	-	1A
Transitional current Itr	0.05	0.05
Nominal Current	6A	6A
Maximum current Imax	6A	6A
Minimum current Imin	0.02A	0.01A
Starting current Ist	< 1 mA	< 1 mA
Frequency	50/60 Hz ± 5%	50/60 Hz ± 5%
Meter constant	1.000 imp/kWh	1.000 imp/kWh
Wiring options	3 Phases – 4 Wires	3 Phases – 4 Wires
	3 Phases – 3 Wires	3 Phases – 3 Wires
	1 Phase (Line 1) – 2 Wires	1 Phase (Line 1) – 2 Wires
Protective class	II	II
Overvoltage category	III	III
Pollution degree	2	2
Rated impulse voltage Uimp	6kV	6kV
Utilization category (UC)	UC-1	UC-1

Three phase – Indirect Energy meters

Technical features

		Three phase - Indirect	
Terminal characteristics		**B24**	**A44**
Line terminals	Min. wire cross section	0,5 mm²	0,5 mm²
	Max. wire cross section	10 mm²	10 mm²
	Screw head	PZ2	Ph2
	Tightening torque	1.5 Nm	1.5 Nm
	Wire stripping lenght	13 mm	13 mm
Neutral terminal	Min. wire cross section	0,5 mm²	0,5 mm²
	Max. wire cross section	10 mm²	10 mm²
	Screw head	PZ2	Ph2
	Tightening torque	1.5 Nm	1.5 Nm
	Wire stripping lenght	13 mm	13 mm
Communication and I/O terminals	Min. wire cross section	0,5 mm²	0,5 mm²
	Max. wire cross section	1 mm²	1 mm²
	Screw head	slotted screw	slotted screw
	Tightening torque	1.5 Nm	1.5 Nm
	Wire stripping lenght	6 mm	6 mm
Climatic condition			
Operating temperature		-40°C to +70°C	
Storage temperature		-40°C to +85°C	
Environmental conditions, operation		Indoor with extended operating temperature; dry locations	
Altitude		2000 m	
Humidity		75% yearly average, 95% on 30 days/year	
Resistance to fire and heat		Terminal 960°C, cover 650°C (IEC 60695-2-1) – UL V0	
Resistance to water and dust		IP 20 on terminal block without protective enclosure and IP 51 in protective enclosure, according to IEC 60529.	
Mechanical environment		Class M2 in accordance with the Measuring Instrument Directive. (MID), (2014/32/EU).	
Electromagnetic environment		Class E2 in accordance with the Measuring Instrument Directive. (MID), (2014/32/EU).	
User interface			
Access to device		3 pushbuttons	5 pushbuttons
Display type		Single line LCD	Single line LCD
		Fixed backlight	Fixed backlight
Display dimensions		32 x 22,5 mm, 1,8“ as diagonal	32 x 22,5 mm, 1,8“ as diagonal
Number of digits counter 1		7 digits	7 digits
I/O			
Digital Output			
Number of output		2 (Optional)	2 (Optional)
Current		2 - 100mA	2 - 100mA
Voltage		5 - 240 V AC/DC. For meters with only 1 output 5 - 40 VDC	5 - 240 V AC/DC. For meters with only 1 output 5 - 40 VDC
Pulse output frequency		Programmable 1–999999 imp/kWh	Programmable 1–999999 imp/kWh
Pulse length		10–990 ms	10–990 ms

Three phase – Indirect Energy meters

Technical features

	Three phase - Indirect	
Terminal characteristics	**B24**	**A44**
Digital Input		
Number of input	2 (Optional)	2 (Optional)
Max Voltage (absolute rating)	0 - 240 V AC/DC	0 - 240 V AC/DC
Off state Voltage	0 - 5 V AC/DC	0 - 5 V AC/DC
ON state Voltage	57 - 240 VAC / 24 - 240 VDC	57 - 240 VAC / 24 - 240 VDC
Min. pulse length and pulse pause	30 ms	30 ms
Communication protocol		
M-Bus		
Baud rate	300, 600, 1200, 2400, 4800, 9600, 19200, 38400	300, 600, 1200, 2400, 4800, 9600, 19200, 38400
Address	1-250	1-250
Access level	Open, Open with password, close	Open, Open with password, close
Modbus RTU		
Baud rate	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200	300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
Parity	Odd, Even, None	Odd, Even, None
Address	1-247	1-247
Pulse Led		
Pulse Frequency	5000 imp/kWh	5000 imp/kWh
Pulse length	40 ms	40 ms
EMC Compatability		
Impulse voltage test	6 kV 1.2/50µs (IEC 60060-1)	
Surge voltage test	4 kV 1.2/50µs (IEC 61000-4-5)	
Fast transient burst test	4 kV (IEC 61000-4-4)	
Immunity to electromagnetic HF-fields	80 MHz–2 GHz at 10 V/m (IEC 61000-4-3)	
Immunity to conducted disturbance	150kHz–80MHz, (IEC 61000-4-6)	
Immunity to electromagnetic disturbances	2–150 kHz for kWh-meters	
Radio frequency emission	EN 55022, class B (CISPR22)	
Electrostatic discharge	15 kV (IEC 61000-4-2)	
Standard	IEC 62052-11	
	IEC 62053-21 class 1 & 2	
	IEC 62053-22 class 0,5 S	
	IEC 62053-23 class 2	
	IEC 62054-21	
	GB/T 17215.211-2006	
	GB/T 17215.312-2008 class 1 & 2	
	GB/T 17215.322- 2008 class 0,5 S	
	GB 4208-2008	
	EN 50470-1	
	EN 50470-3 category A & B	

Three phase – Indirect Energy meters

Product codes

B24

Three phase electricity meter, 4DIN with IR Port, 6A, 3 x 230/400 VAC

Class B (Cl. 1) with functionality level Steel. Active energy

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
-	MID	Pulse Output	Cl.B (Cl.1) - Active	001779	**B24 111 - 100**	2CMA100177R1000	0.250	1
Modbus RTU	MID	Pulse Output	Cl.B (Cl.1) - Active	001786	**B24 112 - 100**	2CMA100178R1000	0.250	1
Mbus	MID	Pulse Output	Cl.B (Cl.1) - Active	001793	**B24 113 - 100**	2CMA100179R1000	0.270	1

Class B (Cl. 1) (Reactive Cl. 2) with functionality level Bronze. Active and reactive energy, import/export.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	Pulse Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	001809	**B24 212 - 100**	2CMA100180R1000	0.250	1

Class C (Cl. 0.5 S) (Reactive Cl. 2) with functionality level Silver. Active and reactive energy, import/export, tariffs 1-4, tariff controll via inputs and communication.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	2 Dig Input 2 Dig. Output	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	001830	**B24 352 - 100**	2CMA100183R1000	0.270	1
Mbus	MID	2 Dig Input 2 Dig. Output	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	001847	**B24 353 - 100**	2CMA100184R1000	0.290	1

A44

Three phase electricity meter, 7DIN with IR Port, 6A, 3 57.7/100...288/500 VAC

Class B (Cl. 1) with functionality level Steel. Active energy

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
-	MID	Pulse Output	Cl.B (Cl.1) - Active	705332	A44 111 - 100	2CMA170533R1000	0.350	1
Modbus RTU	MID	Pulse Output	Cl.B (Cl.1) - Active	002486	A44 112 - 100	2CMA100248R1000	0.350	1
Mbus	MID	Pulse Output	Cl.B (Cl.1) - Active	002493	A44 113 - 100	2CMA100249R1000	0.350	1

Class B (Cl. 1) (Reactive Cl. 2) with functionality level Bronze. Active and reactive energy, import/export.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
-	MID	Pulse Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	000130	A44 211 - 100	2CMA100013R1000	0.350	1
Modbus RTU	MID	Pulse Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705349	A44 212 - 100	2CMA170534R1000	0.350	1
Mbus	MID	Pulse Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705356	A44 213 - 100	2CMA170535R1000	0.350	1

Three phase – Indirect Energy meters

Product codes

A44

Three phase electricity meter, 7DIN with IR Port, 6A, 3 57.7/100...288/500 VAC

Class B (Cl. 1) (Reactive Cl. 2) with functionality level Silver. Active and reactive energy, import/export, tariffs 1-4, tariff controll via inputs and communication.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
-	MID	2 Dig Input 2 Dig. Output	Cl.B (Cl.1) - Active Cl. 2 - Reactive	705363	A44 311 - 100	2CMA170536R1000	0.350	1

Class C (Cl. 0.5 S) (Reactive Cl. 2) with functionality level Silver. Active and reactive energy, import/export, tariffs 1-4, tariff controll via inputs and communication.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	2 Dig Input 2 Dig. Output	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	705370	A44 352 - 100	2CMA170537R1000	0.350	1
Mbus	MID	2 Dig Input 2 Dig. Output	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	705387	A44 353 - 100	2CMA170538R1000	0.350	1

Class C (Cl. 0.5 S) (Reactive Cl. 2) with functionality level Gold. Active and reactive energy, import/export, tariffs 1-4, tariff controlled via inputs, communication or clock,previous values, max and min demand.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	2 Dig Input 2 Dig. Output	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	705400	A44 452 - 100	2CMA170540R1000	0.350	1

Class C (Cl. 0.5 S) (Reactive Cl. 2) with functionality level Platinum. Active and reactive energy, import/export, tariffs 1-4, tariff controlled via inputs, communication or clock, previous values, max and min demand, advanced load profiles, harmonics and THD.

Communic. Protocol	Certif.	I/O	Energy Accuracy	Bbn 7392696	Order details		Weight 1 piece	Pack unit
				EAN	Type code	Order code	kg	pc.
Modbus RTU	MID	Configurable 4 I/O	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	705455	A44 552 - 100	2CMA170545R1000	0.350	1
Mbus	MID	Configurable 4 I/O	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	705462	A44 553 - 100	2CMA170546R1000	0.350	1
Modbus RTU	MID	Configurable 4 I/O	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	705493	A44 552 - 110	2CMA170549R1000	0.350	1
Mbus	MID	Configurable 4 I/O	Class C / Cl. 0.5 S- Active Cl. 2- Reactive	705486	A44 553 - 110	2CMA170548R1000	0.350	1

Energy Meter

D1D 15-ME DC

D1D 15 –ME 200

D1D 15 –ME 650

D1D 15-ME DC Energy Meter
Smart, Compact and Reliable
The **D1D 15-ME** series is a smart and compact, **MID & PTB certified DC energy meter** designed for accurate measurement and fiscal billing, enabling charging station providers to offer a seamless, gas-station-like experience. It accurately records measurement data with timestamps, captures loading process details, and includes a digital signature to ensure compliance with legal billing requirements. Additionally, all charging data is securely stored in the meter's internal memory for persistent record-keeping.

Key Features
- Voltage up to 1000V
- Current up to 650A
- Charging Data recording
- Charging Duration Monitoring
- Line loss energy measurement
- Signed and Encrypted Charging Data
- PTB compliant (Eichrecht) for charging
- MID certified for billing purposes
- Certified with S.A.F.E transparency software
- Encrypted message (OCMF) for secure transmission
- OCMF format compliant with S.A.F.E. Software

Standards
- EN50470- 4
- IEC62053-41
- IEC62052-11
- PTB-A 20.1
- PTB-A 50.7
- OCMF1.2.0
- VDE-AR-E 2418-3- 100

Product name	EAN 6925897	Order code	Current	Voltage	Certific.	Comm.	Accuracy
D1D 15 –ME 200 Modbus	514437	2TAZ666012R2001	200 A	1000 V	MID + PTB	Modbus RTU	Class B (Class 1) Active energy
D1D 15 –ME 650 Modbus	514420	2TAZ666012R2000	650 A	1000 V	MID + PTB	Modbus RTU	Class B (Class 1) Active energy

Energy Meter

Technical features

Terminal characteristics		D1D 15-ME 650	D1D 15-ME 200
Installation	Installation	DIN Rail	
Auxiliary power supply	Auxiliary power supply	9-40V DC	
Voltage	Umax	1000V	
	Umin	150 V	
Current	Starting current Ist	0.52A	0.08A
	Minimum current Imin	6.50A	1.00A
	Transitional Current Itr	13A	4A
	Normal current Iref	130A	40A
	Maximum current Imax	650A	200A
Accuracy	Accuracy class	Class B	
Measuring Active Energy	Energy Direction	+A with -A	
Energy Register	Total Mains Energy	+A / -A / total	
Meter constant	LED-Output	1000 Imp/kWh, Total Mains Energy	
Display	LCD	"Dot Matrix Display with 7+4 digits"	
	Life cycle	> 12 years	
"Modbus communication - RS 485"	Connector	Port 1: terminal 7/8 Port 2 & 3: RJ12	
	Baud rate	4800~115.200 bps	
	Address	1-247	
	Transmission distance	Up to 1000m	
	Parity	None(default), Odd, Even	
	Stop bits	1 or 2	
Data Storage	Capacity for Start- and Stop-Charge Records	> 225.000	
	Capacity of Logbook	> 3000	
Power Consumption	Voltage circuit	≤ 0.5 W at Un	
	Current circuit	≤ 0.12 W/A * Imax	
	Auxiliary power supply	< 2 W	
Environmental conditions	Operation Temperature	-40°C to +80°C	
	Storage Temperature	-40°C to +85°C	
	Humidity	Max 98%	
	Mechanical	M1	
	Electromagnetic	E2	
Dimension	Size (mm)	115 x 103 x 64	
Product Material	Material	Polycarbonate, UL94-V0	
Standards & Approvals	Certificate & Approval	EN50470- 4:2023, IEC62053-41:2021, IEC62052-11:2020, EN-IEC 62052-11/A11:2022, VDE-AR-E 2418-3- 100, PTB-A 20.1, PTB-A 50.7, OCMF1.2.0	

Energy efficiency

ABB EQmatic

QA/S 3.16.1

QA/S 3.64.1

Energy Analyzer, M-Bus, MDRC
Compact and web-based stand-alone devices for energy management applications. For monitoring, logging, displaying and analyzing consumption data of up to 16 or 64 electricity, gas, water or heat meters via M-Bus. Automatic detection for ABB EQ meters (A/B-Series). Access to the device via web browser. The user interface provides graphical analysis functions, e.g. dashboard, historical data, instantaneous values, benchmark functions, cost allocation according to consumer groups and more.

Description	Bbn 4016779	Order details		Weight 1 piece	Pack unit
	EAN	Type code	Order code	kg	pc.
16 Devices	997751	QA/S 3.16.1	2CDG110226R0011	0.15	1
64 Devices	997768	QA/S 3.64.1	2CDG110227R0011	0.15	1

KNX interface for EQ Meters

ZS/S 1.1

Meter Interface Module, KNX
It records consumption and measured values of the electrical energy consumption meters. Using an infra-red interface, the ABB energy meter types of the A- and B-series are incorporated. The information and data which is read can be used, for example, for cost centre accounting, energy optimisation, monitoring of installations and visualisation.

Description	EAN	Order details		Weight 1 piece	Pack unit
		Type code	Order code	kg	pc.
KNX meter module	4016779662079	ZS/S 1.1	2CDG110083R0011	0.100	1

MG/S 11.100.11

Modbus RTU Client - KNX TP Gateway, 100 Points, MDRC
The Modbus KNX Gateway integrates Modbus RTU server devices with KNX installations at field level. The devices support standard KNX data points (DPT) and up to 100 data points. The device is put into operation with the ETS. An optional, free-of-charge ETS app (DCA) is available to facilitate the configuration, allowing to export, and import Modbus-KNX mapping in the form of templates. Modbus component templates will also be available for download from a database. Auxiliary voltage is not required.

Description	EAN	Order details		Weight 1 piece	Pack unit
		Type code	Order code	kg	pc.
	4013614571084	MG/S 11.100.11	2CDG120089R0011	0.048	1

InSite energy management system

The InSite energy management system offers smart energy and load management to e**nhance energy efficiency in both sub and final distribution**. Its scalability caters to diverse requirements, **from basic monitoring and control to advanced load management**, ensuring all energy management needs are met effectively both **on-premise or cloud-based**.

It provides comprehensive, flexible solutions for a wide range of applications. The central control unit serves as the brain of the system, monitoring energy data via current sensors and enabling control and automation functionalities through smart accessories. This integrated approach allows for advanced energy and load management solutions that are **easily customizable for specific applications**, the number of devices to be managed, and the required functionalities.

The InSite energy management system features two control units – SCU100 and SCU200.

The **SCU100** control unit is designed for **comprehensive monitoring functions with limited control capabilities**. It can connect to a large number of current sensors, I/O modules, and smart signaling devices, making it an ideal choice for applications that require extensive monitoring functionality.

SCU200, on the other hand, is an **advanced, modular** control unit emphasizing flexibility and scalability. Like SCU100, it can connect with current sensors, I/O modules, smart accessories and Modbus devices, with the option to **expand further through plug-in expansion modules** based on specific protocols and metering requirements. The SCU200 also includes a Wi-Fi version for setups where seamless device access is crucial, minimizing wiring needs and enhancing sophistication.

Protection devices like our digital surge protective device eOVR, or our standard protection portfolio equipped with smart aux/signaling device INS-S/H, are predefined in the SCU100 and SCU200 webservers. The eOVR can be connected directly via Modbus RTU while other devices can be connected via the smart communication or I/O module.

The system's **web server offers a customizable dashboard** for simplified data export, local control, enabling the development of advanced automation logic and comprehensive control over connected devices, including third-party components.

With our **intuitive multi-site energy management cloud platform, InSite Energy Pro**, users can benchmark performance and identify energy-saving opportunities, while real-time monitoring and automated load management enhance energy efficiency and support compliance with sustainability regulations.

Comparative Overview of SCU100 and SCU200

SCU100

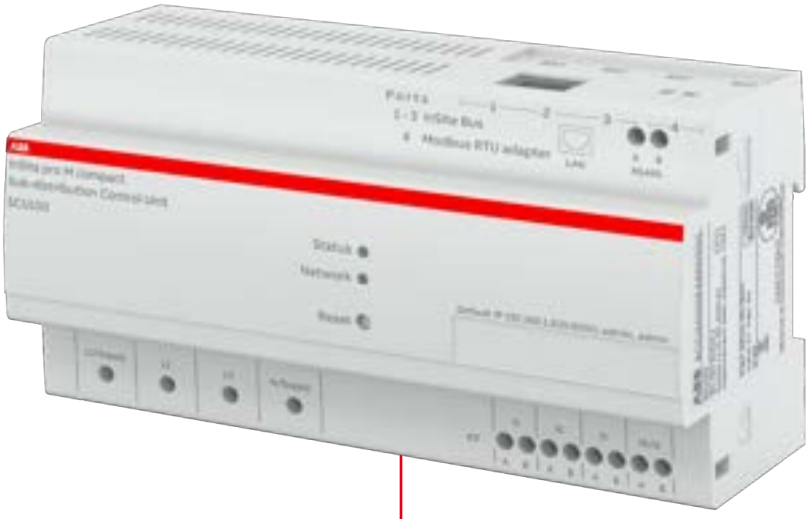

Comprehensive approach

Mainly for **installations with high number of branches** to be monitored

More suitable for **integration with local 3rd party** monitoring systems

SUITABLE FEATURES

- **Higher number of loads** monitored through sensors by a single control unit
- Smart signal/auxiliary contact available
- **Higher mains current measurements** possible thanks to 5A current transformers
- Compliance with ABB's **cybersecurity regulations**

RECOMMENDED APPLICATIONS

Industry, Data Centers, Large Commercial

Technical feature	Description
Number of connectable devices (Current sensors, IO modules, smart aux/sign)through InSite flat cable	Up to 96
Smart signal/auxiliary contact connection	Yes
Number of integrable Modbus devices	Up to 32 (16 RTU + 16 TCP - 4 registers per device only)
Max current measurable directly by an InSite device	Depending on the 5A current transformers connected to the control unit
Communication protocols available for data transfer upstream (BMS/SCADA/Cloud etc.,)	Modbus RTU, Modbus TCP, SNMP, FTP, SFTP, SMTP, Rest API
Wi-Fi connection	No
Power supply	AC
Expandable memory storage	No

SCU200

Modular approach

Mainly for **installations wide range of different devices** to be integrated

More suitable for **integration into cloud platforms, incl. ABB InSite Energy Pro**

SUITABLE FEATURES

- **Comprehensive monitoring** and **advanced control**, connectivity features
- **Wi-Fi connection** possible
- **Smart signal/auxiliary contact** available
- **DC power supply** possible
- Higher mains current magnitude measurement thanks to metering module (INS-E3-5).
- Direct integration with InSite Energy Pro cloud via cellular connectivity using the LTE module (INS-LTE)
- Compliance with ABB's **cybersecurity regulations**

RECOMMENDED APPLICATIONS

Residential, Telecom and unmanned substations, Small Commercial

Technical feature	Description
Number of connectable devices (Current sensors, IO modules, smart aux/sign)through InSite flat cable	Up to 32
Smart signal/auxiliary contact connection	Yes
Number of integrable Modbus devices	Up to 32 (16 RTU + 16 TCP/IP)
Communication protocols available for data transfer upstream (BMS/SCADA/Cloud etc.,)	Modbus TCP, SNMP, FTP, SFTP, SMTP, Rest API
Wi-Fi connection	Yes
Power supply	AC and DC
Expandable memory storage	Yes (SD card)

Control Unit
SCU100

The SCU100 is designed for simple and efficient collection and analysis of measured values and energy data in buildings, data centers, and various industrial settings.
By enhancing the transparency of energy flows, it helps improve energy efficiency and reduce costs across different branches and functional buildings.
The SCU100 supports connections with various devices, including energy meters, network analyzers, I/O modules, smart auxiliary devices, current sensors.

Capable of collecting data from up to 16 energy and power meters via Modbus RTU, 16 energy and power meters (limit: 4 registers for each device) via Modbus TCP and 96 current sensors and digital channels simultaneously, the SCU100 calculates energy usage and operational metrics at a single-line level, allowing for period or device comparisons.

Its built-in web server provides intuitive access to measured data, configuration settings, and system parameters without additional software.

Data can be accessed locally or exported automatically via various interfaces, integrating seamlessly into higher-level building management systems.

Single access point in the sub distribution board, data aggregator and collector from field devices

Modbus TCP/IP and RTU to communicate to supervision system, enabling remote availability of collected data

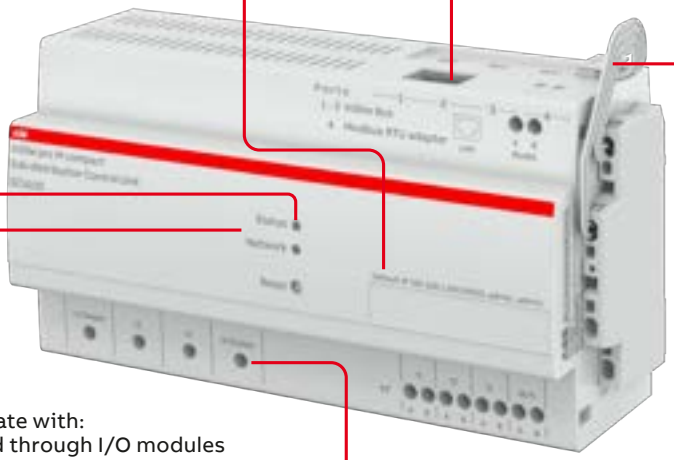

LEDs for visual understanding of correct /uncorrect installation and functioning

3 ports for up to 128 devices connected:

1. **Ethernet RJ45 port - Modbus TCP**: connectivity of up to 16 TCP devices of any kind (meters, breakers, EV chargers, solar, ...*4 registers each)
2. **RS485 port – Modbus RTU**: connectivity of up to 16 RTU devices of any kind (meters, breakers, EV chargers, solar, ...)
3. **InSite bus port**: connectivity of up to 96 devices, whether they are current sensors, I/O modules, or smart accessories

Firmware upgrade to communicate with:
- Classic accessories connected through I/O modules
- CMS sensors, energy and power meters in Modbus RTU

Internal power supply to enable communication and correct functioning of sensors and I/O modules

System Architecture with SCU100

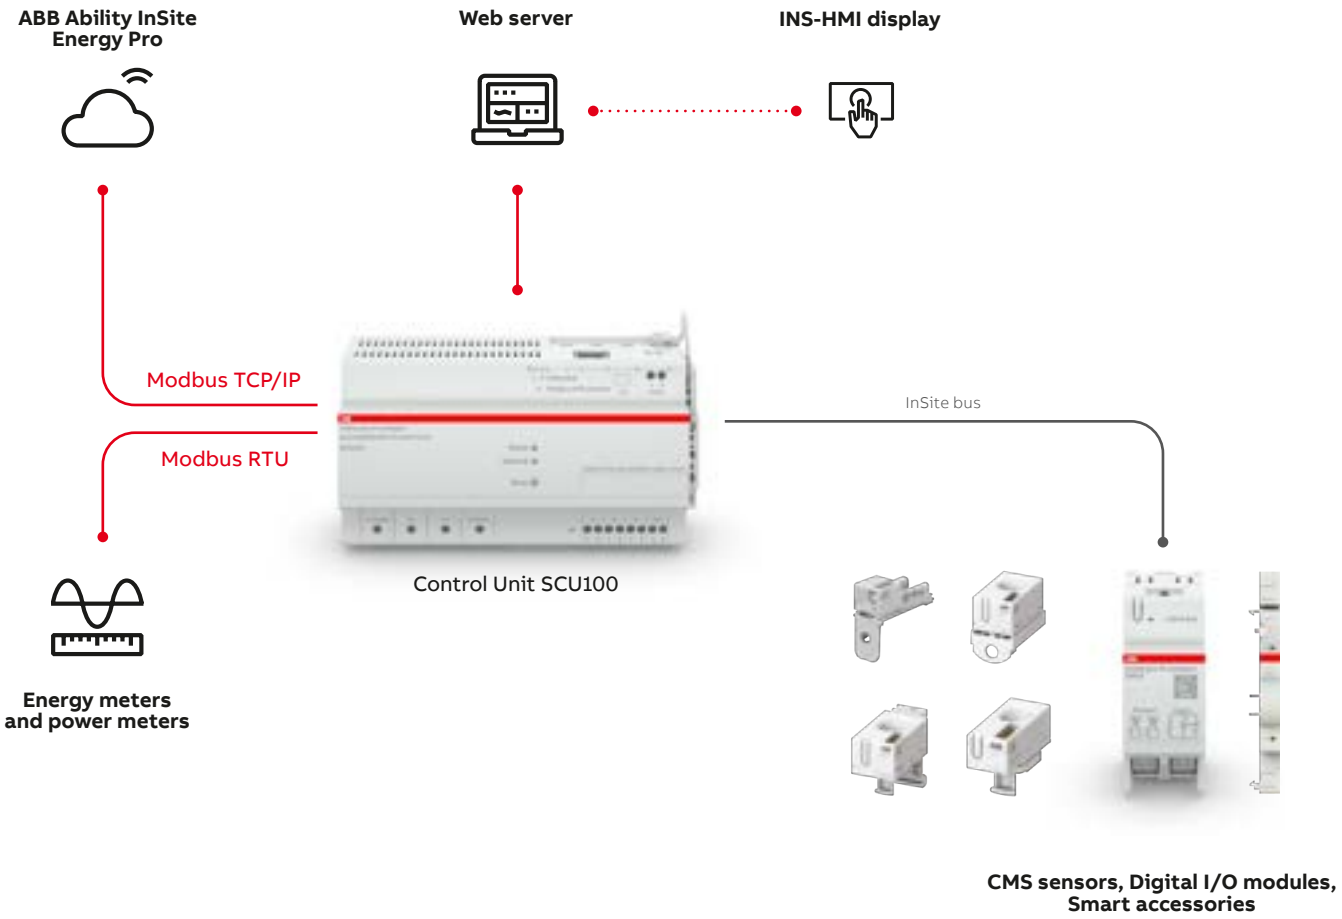

Technical data
SCU100

Sub distribution control unit	Technical feature	Unit	Description
	Supply voltage	[VAC]	80...277 (L1-N, +5%)
	Frequency	[Hz]	50/60
	Power input (L1-N)	[W]	5...45 depending on number of sensors and I/O modules
	Power input , current trtransformer, secondary side	[VA]	Current circuit <2 (per phase)
	Voltage measurement range	[VAC]	80...277 (L1, L2, L3-N)
	Measurement range, current transformer, secondary side	[A]	nominal: 5 max: 6
	Harmonic component	[Hz]	up to 2000
	Data rate of Modbus RTU	[Baud]	RS-485 2- wire, 2400...115200
	Refresh time		1 sec / 30 sec (depending on type of data)
	Data storage and export		Integrated 1-year data storage Automatic CSV data export
	Communication		LAN: Modbus TCP/IP, secured SNMP v1, v2, encrypted v3 RS485: Modbus RTU FTP, SFTP, SMTP and Rest API
	Connected devices		Up to 96 sensors/digital channels Up to 16 meters via Modbus RTU Up to 16 meters via Modbus TCP (limit, 4 registers per device)
	LAN	[Mbit/s]	100
	Conductor cross-section	[mm^2]	0.5...2.5
	Mounting method		35mm DIN rail (DIN 5022)
	Degree of protection		IP20
	Dimensions	[mm]	161.5x87.0x64.9 (9WM)
	Oparting temperature	[°C]	-25...+60
	Stirage temperature	[°C]	-40...+85
	Standards		IEC61010-1, UL 508

Main circuit accuracy	Description
Voltage	± 1%
Current	± 1%
Harmonic component (up to 2500Hz)	± 1%
Active power	± 2%
Apparent power	± 2%
Reactive power	± 2%
Power factor	± 2%

Web server
SCU100

Insite SCU100 built-in webserver is a user-friendly, locally accessible interface requiring no cloud connection and provided at no additional cost. With a simple design, it offers a rich set of features, including widgets for an at-a-glance view of real-time values and status across all integrated devices. Users can explore interactive graphs, perform trend analysis, and benchmark consumption trends between devices to gain valuable insights.

The webserver also makes it easy to adjust settings, commission new configurations, export reports, set up automations and alerts, and configure email notifications, providing a comprehensive and intuitive energy management experience.

Realtime widgets & Benchmarking

Complete historical Analysis

Automated data export

Alarms & Events

Control Unit
SCU200

SCU200 elevates smart energy and load management functionalities, offering a comprehensive solution to optimize energy usage in both sub and final distribution.

The compact control unit collects data from field devices, which can then be accessed via the InSite web server, or any third-party application.

Depending on the specific needs, expansion modules can be selected from a range of options, allowing the system to be customized in a cost- and space-efficient way.

LED lights for at-a-glance information about device status and connectivity

Embedded Wi-Fi antenna for the wireless connectivity of the system to the LAN but also to access the WebUI

Micro SD card memory slot

3 ports for up to 64 devices connected:

1) Ethernet RJ45 port - Modbus TCP:
Connectivity of up to 16 TCP devices of any kind (meters, breakers, EV chargers, solar, …)

2) RS485 port – Modbus RTU:
Connectivity of up to 16 RTU devices of any kind (meters, breakers, EV chargers, solar, …)

3) InSite bus port:
Connectivity of up to 32 devices, whether they are current sensors, I/O modules, or smart accessories

External antenna port

System Architecture with SCU200

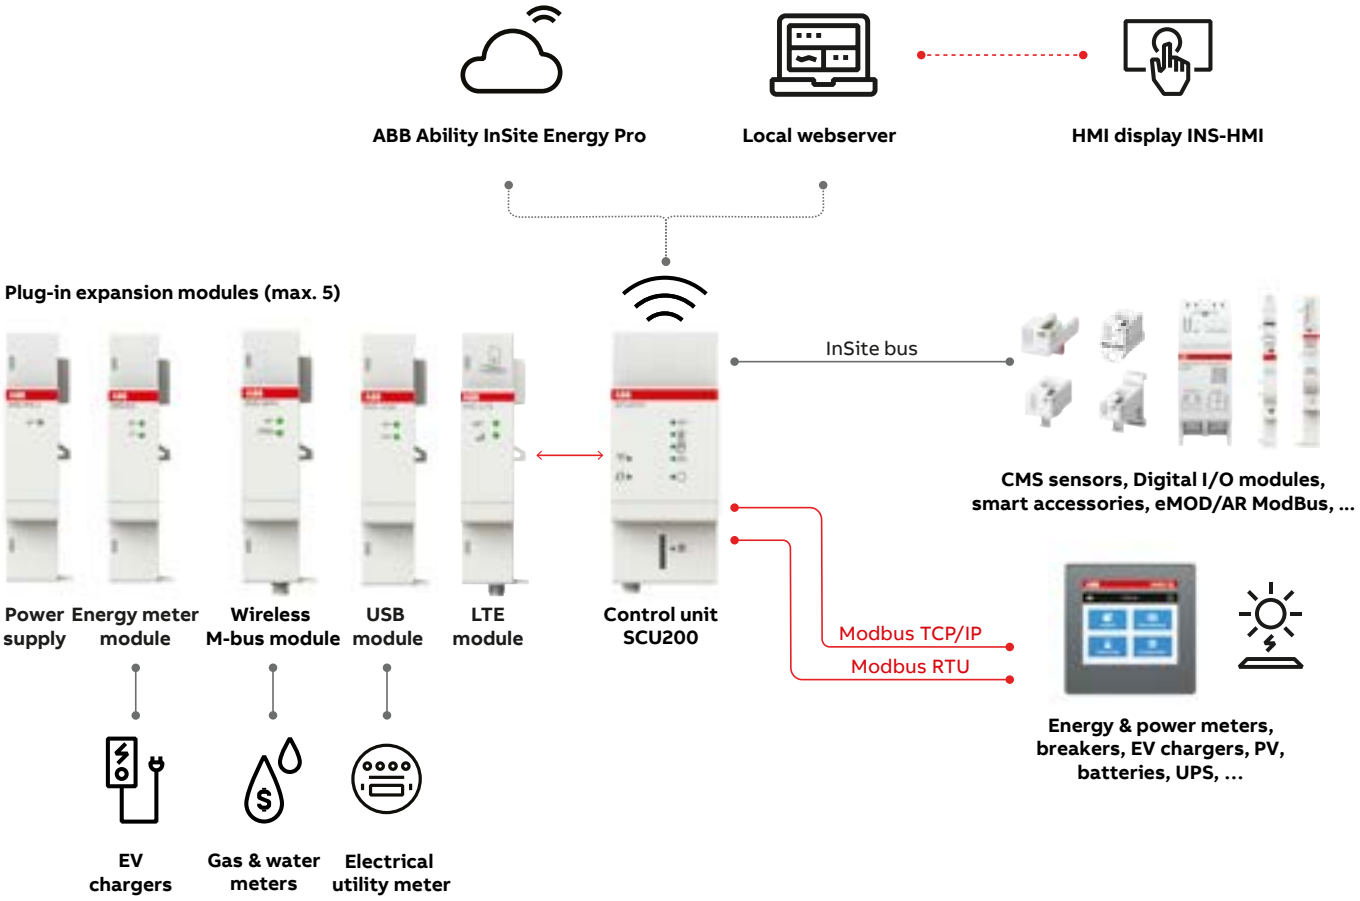

Technical data
SCU200

SCU200 / SCU200-W	Technical feature	Unit	Description
	Supply voltage	[V]	24VDC +/- 10%
	Current	[A]	Max 0.7
	Connection		InSite modular bus
	Power consumption	[W]	Max 3.6
	Refresh time		1sec / 30 sec (depending on type of data)
	Data storage and export		Integrated data storage (expandable through microSD card)
			Automatic CSV data export
	Communication protocols		Modbus TCP/IP
			Rest API
			DHCP
			HTTPS
			NTP SFTP/FTP MQTT (protocol for InSite Energy Pro), SMTP
	Communication ports	[Mbit/s]	Ethernet, 10/100
			RS485 (120Ω termination default)
			WiFi 2.4 GHz IEEE 802.11 b/g/n*
			InSite bus
	External antenna port*		Female SMA / 50Ω / 2.4 GHz
	External Antenna (not included)*		Male SMA / 50 Ohm / 2.4 GHz max 4.7 dBi
	Power supply 24VDC connection		
	Conductor cross section solid /flexible	[mm²]	0.2 ... 1
	AWG	[AWG]	28-17
	Strip length	[mm]	10
	RS485 port connection		
	Conductor cross section solid /flexible	[mm]	0.14 ... 1.5
	AWG solid conductor	[AWG]	28-16
	AWG flexible conductor	[AWG]	26-14
	Strip length	[mm]	8 ... 9
	Connected devices		Up to 32 current sensors/digital channels/smart accessories
			Up to 16 Modbus TCP/IP and 16 Modbus RTU devices
	Mounting method		35mm DIN rail (DIN 5022)
	Degree of protection		IP20
	Dimensions	[mm]	35.8x87x64.9 (2M)
	Weight	[g]	105
	Operating temperature	[°C]	-25... +55
	Storage temperature	[°C]	-40... +85
	Operating altitude	[m]	0... 2000
	Standards		IEC61010-1
			IEC 61326-1

* only on SCU200-W

Web server
SCU200

Once the system is installed, it enables connection to the integrated InSite web server with automatic device recognition. Through the SCU200 local web server, real-time insights into energy consumption and power quality are provided. Users can customize widgets such as graphs, charts, and tables, for immediate visibility into consumer allocation, top consumers, and trend deviations. Additionally, the system calculates costs using a range of tariff options and enables the management of multiple contracts for comprehensive financial insight.
Consumption trends can be effortlessly tracked and analyzed over time, with data stored in intervals as small as thirty seconds. Moreover, alerts and actions can be automated based on predefined conditions.
The system facilitates local device control by providing a dedicated page for each device, featuring writable Modbus variables. Additionally, it allows control of devices from external cloud platforms or BMS systems via REST API or Modbus. This ensures efficient and optimized energy management at your fingertips, customized to meet specific requirements. Thanks to its seamless platform, integrating any third-party device is straightforward and user-friendly, making it remarkably convenient for customers.

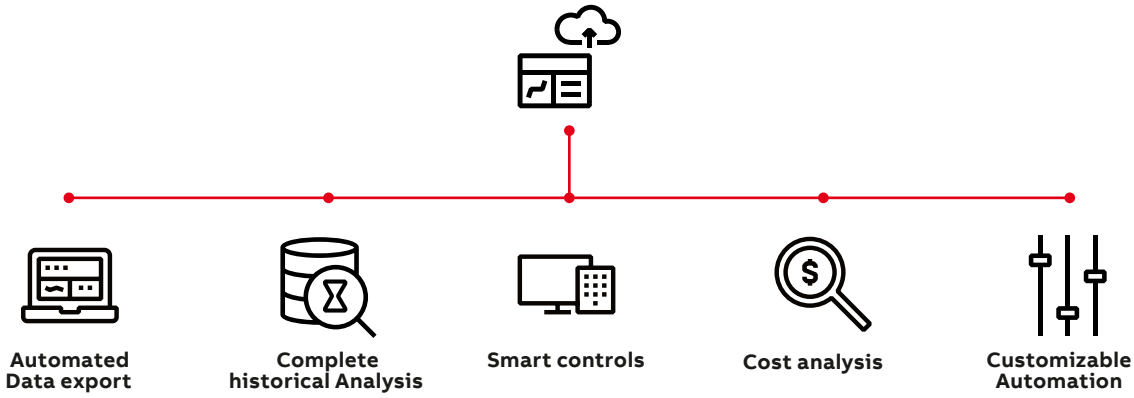

NEW energy management cloud platform
ABB Ability InSite Energy Pro

InSite Energy Pro is a cloud platform for intuitive, multi-site energy management that connects with the InSite system's SCU200 control unit.

SCU200 control unit operates as the main gateway that connects to the cloud and manages energy data across various devices, such as breakers, meters, and Electric Vehicle (EV) chargers.
With InSite Energy Pro, users can obtain a holistic view of their energy ecosystem, facilitating decision-making, performance optimization, and cost reduction.

Multi-dwelling units

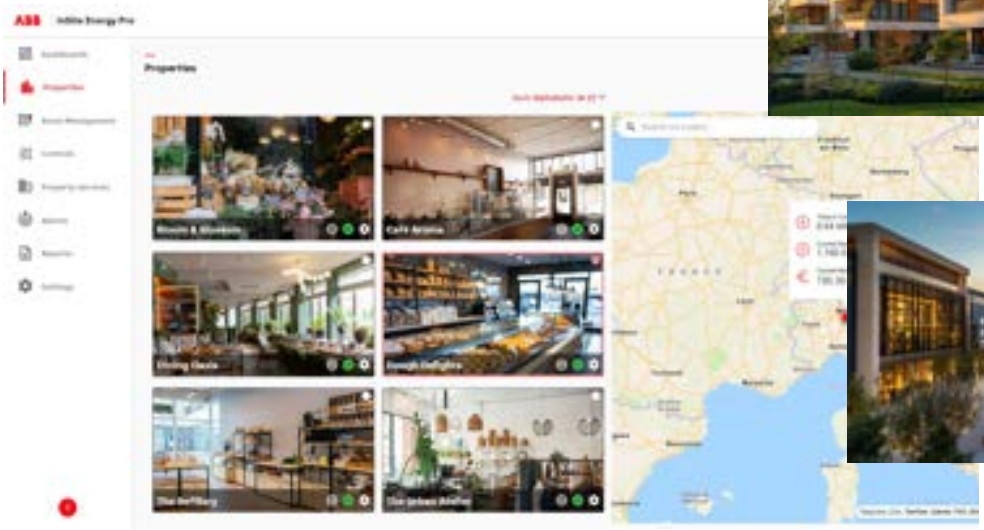

Commercial buildings

Elevate energy efficiency, from groud to cloud.

solutions.abb/insite-energy-pro

Easy implementation and retrofit

- **Reduce complexity, costs and space** with only one control unit as the main gateway
- **Easy retrofit and upgrade of existing installation** at any time, minimizing impact on building operations
- **Enable integration and connection** to other 3rd party systems, using the data from the cloud to enrich the electrical data ecosystem

Intuitive energy management

- **User-friendly interface** with multi-location view, property status indicators, and comprehensive property details
- **Customizable dashboards** with a broad range of widgets for tailored views according to each application's needs

NEW energy management cloud platform
ABB Ability InSite Energy Pro

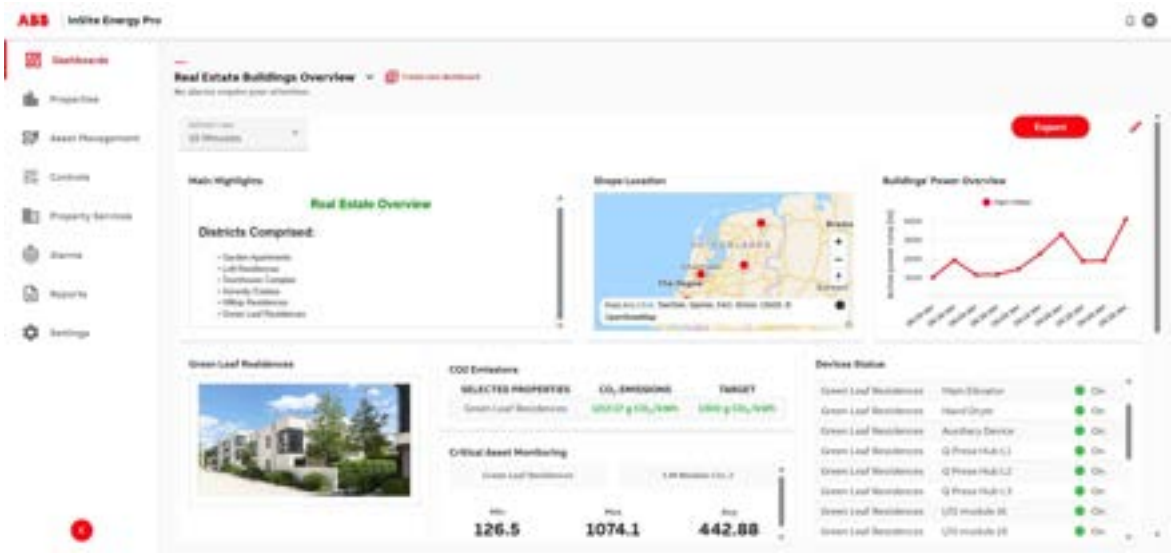

- **Energy Dashboards:** Create and customize multiple energy monitoring dashboards with a broad variety of widgets.
- **Properties:** A dedicated section to manage and oversee multiple facilities at a glance and in detail.
- **Asset Management:** Keep track of all the devices connected to the system, visualizing their status and details.
- **Control:** Manual control of selected loads (e.g. ABB Terra AC)
- **Property Services:** A dedicated section to enrich your analysis through benchmarking and contracts & and tariffs configurations.
- **Alarms:** Configure your alarms to always be aware of any critical situations.
- **Reports:** Keep track of your facilities' performance with dedicated reports, facilitating communication with key stakeholders.
- **Settings:** General configuration and settings for the cloud application.

Accelerate decision-making

- **Remote monitoring** of real time energy data, KPI overview
- **Real-time notifications** and alerts to be always informed and enable proactive behavior
- **Remote control** of selected loads to quickly act in case of any critical situation
- **Benchmark analytics** allow for comparisons between different devices, groups or properties to identify areas of improvement

Reporting and transparency of energy data

- **Comprehensive reports** that aggregate different data sources to show energy usage and cost distribution across different sites
- **Makes energy data more accessible and transparent**, keeping key stakeholders up-to-date about the overall performance and KPIs
- **Supports compliance** with energy efficiency regulations (e.g. ISO 50001)

Plug-in expansion modules
for SCU200

Customize your InSite energy management system with plug-in expansion modules for your specific application needs.

Simply plug up to 5 expansion modules into the central Control Unit SCU200(W) without any tools needed. The system will automatically recognize the modules, making them visible in its local webserver and cloud platform.

01 02 03

01
Control Unit SCU200(W)
Central system gateway

02
Power Supply module
AC to DC converter

03
USB module
for connection of smart meters with P1 port

Plug-in expansion modules
for SCU200

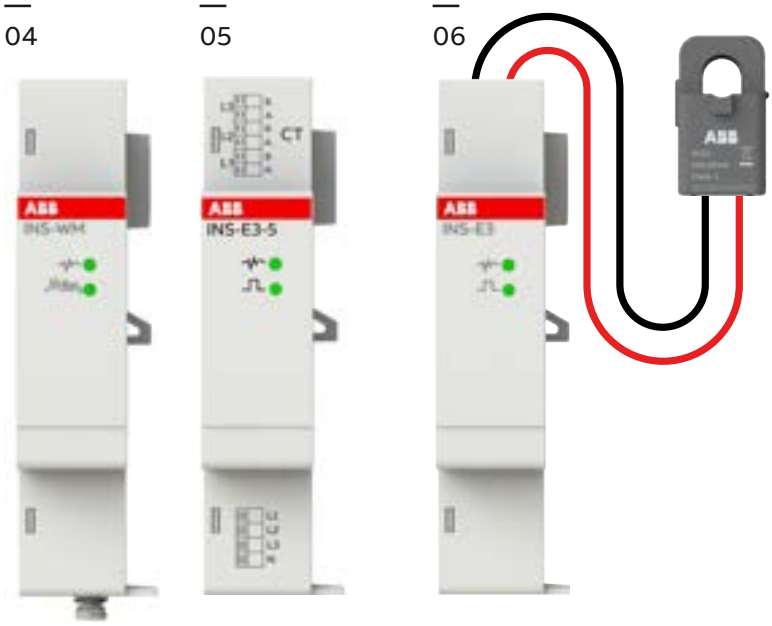

04
Wireless M-Bus module
for the integration of wireless Mbus meters on the field

05
Energy metering module
for energy measurements

06
Split-core Current Transformers
for INS-E3 metering module, to measure currents up to 80A

07
LTE connectivity module
for direct connection to the internet via mobile networks

08
Antenna
compatible with all InSite products (SCU200-W, INS-LTE, INS-LoRa, INS-WM)

09
LoRa communication module
enables LoRaWAN communication for the SCU200

10
Collector Hub module
for reaching up to 160 devices via the InSite flat cable

Power supply modules
INS-PS-1 and INS-PS-2

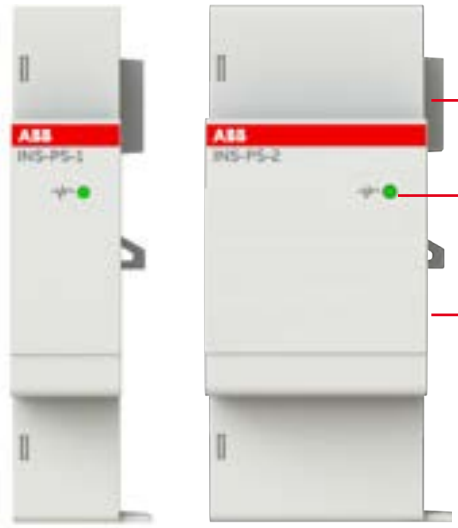

Power supply modules designed to support AC installation – available up to 10 kW or 30 kW based on the configuration

Plug-in functionality
for tool-free mounting to the control unit SCU200

Status LED for instant visual feedback

Wide range of operating voltages
for both AC and DC

Technical feature	Unit	INS-PS-1	INS-PS-2
Supply voltage	[V]	100...240 VAC +/-10% 110...350 VDC (tolerance included)	100...240 VAC +/-10% 110...350 VDC (tolerance included)
Connection		InSite modular bus	InSite modular bus
Solid conductor	[mm²]	0.14...1.5 (28...16 AWG)	0.14...1.5 (28...16 AWG)
AWG solid conductor	[AWG]	28...16	28...16
Fine-stranded conductor	[mm²]	0.14...1.5 (26...14 AWG)	0.14...1.5 (26...14 AWG)
Fine-stranded conductor; with insulated ferrule	[mm²]	0.25...0.75	0.25...0.75
Fine-stranded conductor; with uninsulated ferrule	[mm²]	0.25...1.5	0.25...1.5
Strip length	[mm]	8...9 mm (0.31...0.35 in)	8...9 mm
Connection type		screwless	screwless
Power output	[W]	10W nominal / 15W boost	30W nominal / 45W boost
Max input Current	[mA]	180	450
Frequency		50/60Hz ± 5%	50/60Hz ± 5%
Power input (L1-N)		18W max	45W max
Conductor cross-section		1.5mm² max	1.5mm² max
Mounting method		35mm DIN rail (DIN 5022)	35mm DIN rail (DIN 5022)
Degree of protection		IP20	IP20
Dimensions	[mm]	17.5x87.0x64.9 (1WM)	35.8x87x64.9 (2M)
Impact test		IK06	IK06
Weight	[g]	77	110
Operating temperature	[°C]	-25...+60	-25...+60
Storage temperature	[°C]	-40...+85	-40...+85
Operating altitude	[m]	0...2000	0...2000
Standards		IEC 61010-1	IEC 61010-1
		IEC 61326-1	IEC 61326-1
Declarations		CE, UKCA	CE, UKCA

Metering modules
INS-E3 and INS-E3-5

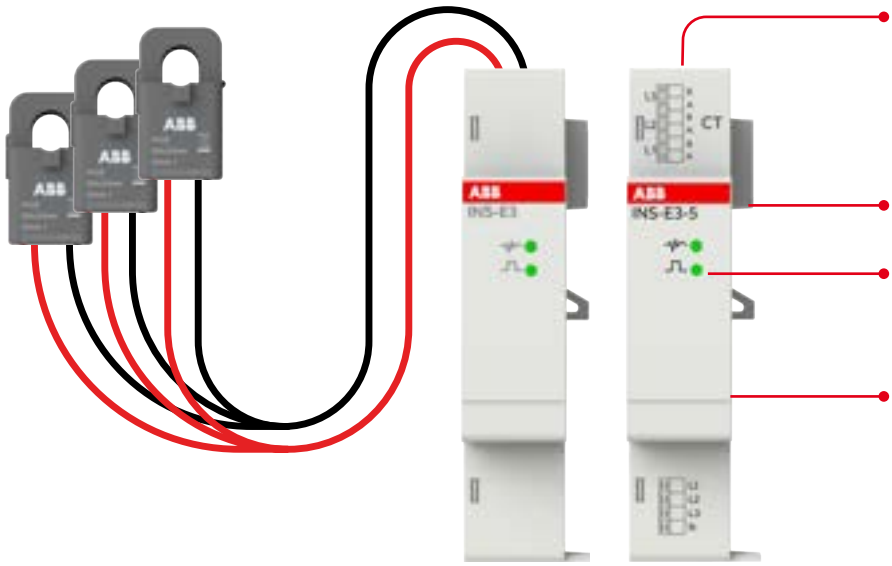

Metering modules for enabling accurate monitoring of mains supply or high-demand loads – ideal for applications below 80 A (INS-E3) or with higher current via external CTs (INS-E3-5)

Power directly InSite Plug-in Bus

Status LED for instant visual feedback

Function as either single-phase or three-phase energy meter

Technical feature	Unit	INS-E3	INS-E3-5
Supply voltage	[VDC]	24V	24V
Connection		InSite modular bus	InSite modular bus
Power consumption	[W]	0.7	0.7
Over Voltage category		II	II
Network Type		-3 phase 4 wires; 3 CT	-3 phase 4 wires; 3 CT
		-3 phase 3 wires; 3 CT	-3 phase 3 wires; 3 CT
		-3 phase 4 wires; 2 CT	-3 phase 4 wires; 2 CT
		-1 phase 2 wires; 1 CT	-1 phase 2 wires; 1 CT
Voltage input connection		Screwless terminal block	Screwless terminal block
Voltage specified measurement range (full accuracy)	[VAC]	80...240 (L1,L2, L3-N)	80...240 (L1,L2, L3-N)
Voltage limit range of operation	[VAC]	0...277	0...277
Frequency	[Hz]	50 / 60	50 / 60
Data availability		SCU200 webserver, Modbus TCP, Rest API, Reports via SMTP / FTP	SCU200 webserver, Modbus TCP, Rest API, Reports via SMTP / FTP
Current transformers			
Current transformers		CTS-20/50/80	Any CT
Current transformer supported on Primary side	[A]	up to 80	No upper limit
Current transformer supported on Secondary side	[A]	nom.: 0.004	nom: 5
Accuracy - INS-E3-5 (@25 °C, PF=1)		Active Energy 1%	Active Energy 1%
Accuracy - CTS-1-XX		Class 1 (EN 61869-2)	
Conductor cross-section			
Solid/fine-stranded conductor	[mm²]	0.14...1.5	0.14...1.5
AWG solid conductor	[AWG]	28...16	28...16
AWG fine-stranded conductor	[AWG]	26...14	26...14
Fine-stranded conductor with insulated ferrule	[mm²]	0.25...0.75	0.25...0.75
Fine-stranded conductor with uninsulated ferrule	[mm²]	0.25...1.5	0.25...1.5
Strip length	[mm]	8...9	8...9
CTS cable length	[m]	0.5	0.5
Mounting method		35mm DIN rail (DIN 5022)	35mm DIN rail (DIN 5022)
Dimensions	[mm]	17.5x87.0x64.9 (1M)	17.5x87.0x64.9 (1M)
Weight	[g]	52	52
Relative Humidity		0.95	0.95
Over voltage Category		II	II
IK code		IK06	IK06
Pollution degree		2	2
Operating temperature	[°C]	-25...+60	-25...+60
Storage temperature	[°C]	-40...+85	-40...+85
Operating altitude	[m]	0...2000	0...2000

USB Communication module
INS-USB

100mA USB port for the connection of P1 smart meters (energy, gas, water)

Plug-in functionality for tool-free mounting to the control unit SCU200

Status LED for instant visual feedback

USB modules designed to read the real-time data from utility meters (e.g. Linky) and **P1 ports** (selected non-encrypted models with DSMR - 5.0 version)

500mA USB port future additional integrations requiring USB connection

INS-USB	Technical feature	Unit	Description
	Supply voltage	[VDC]	Supplied by the InSite modular bus
	Connection		InSite modular bus
	Power consumption	[W]	0.4 (standby)
	Communication protocol		USB 1.1 (max speed 12Mbps)
	Data availability		SCU200 webserver, Rest API, Reports via SMTP / FTP
	Power capabilities		100mA @5V (USB P1 port) 500mA @5V (bottom USB port)
	Mounting method		35mm DIN rail (DIN 5022)
	Degree of protection		IP20
	Dimensions	[mm]	17.5x87x64.9 (1M)
	Weight	[g]	46
	Operating temperature	[°C]	-25...+60
	Storage temperature	[°C]	-40...+85
	Operating altitude	[m]	0...2000
	Standards		IEC61010-1
			IEC 61326-1

Wireless M-bus Communication module
INS-WM

Integrate up to 32 wireless M-bus meters into SCU200 through a wired M-bus module each

Plug-in functionality for tool-free mounting to the control unit SCU200

Status LED for instant visual feedback

Wireless M-bus gateway provided with connection for external antenna

INS-WM	Technical feature	Unit	Description
	Supply voltage	[VDC]	Supplied by the InSite modular bus
	Connection		InSite modular bus
	Power consumption	[W]	0.5
	Communication protocol		Wireless M-bus
	Data availability		SCU200 webserver, Rest API, Reports via SMTP / FTP
	Number of meters that can be read unit		Up to 16 meters on filed
	RF mode		C1 and T1
	Frequency band	[MHz]	868.95
	Max RF output power		RF mode – receiver only
	Max RF input power	[dBm]	10
	External antenna (not included)		male SMA / 50 Ohm / 868.95MHz
	Mounting method		35mm DIN rail (DIN 5022)
	Degree of protection		IP20
	Dimensions	[mm]	17.5x87x64.9 (1M)
	Weight	[g]	48.54
	Operating temperature	[°C]	-25...+60
	Storage temperature	[°C]	-40...+85
	Operating altitude	[m]	0...2000
	Standards		IEC61010-1
			IEC 61326-1

NEW LTE Connectivity module
INS-LTE

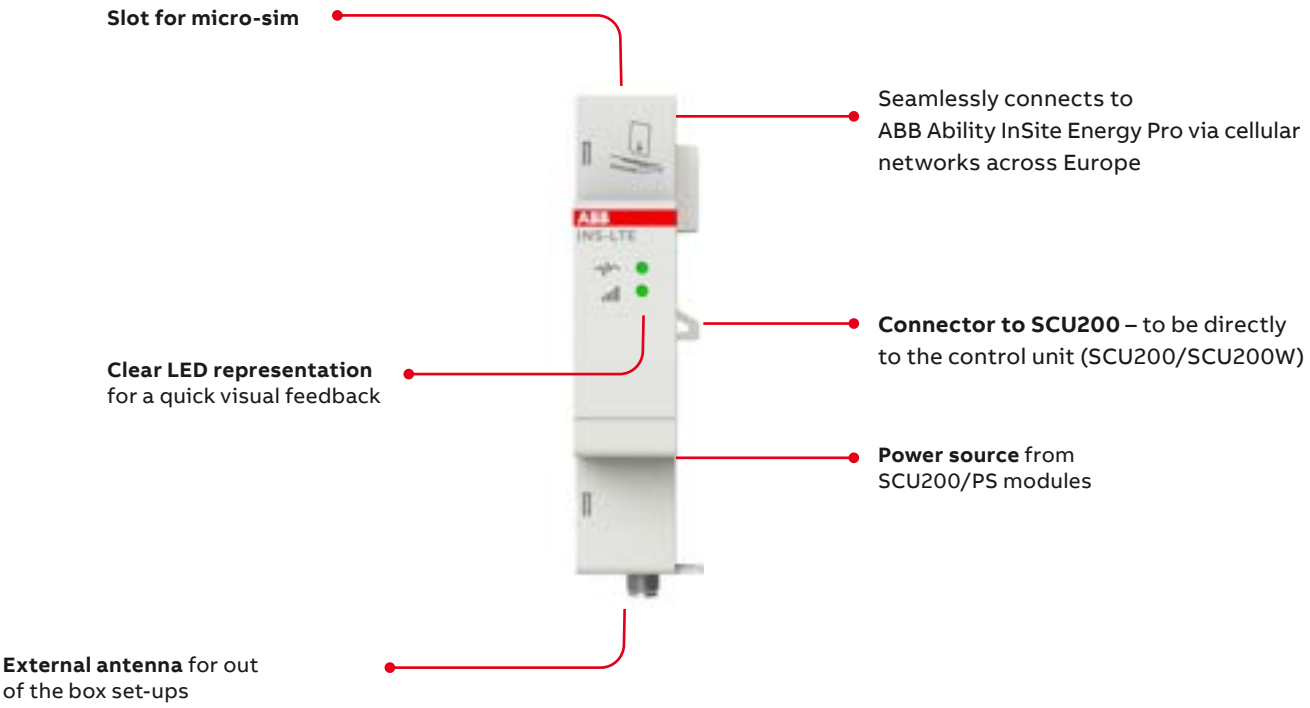

INS-LTE	Technical feature	Unit	Description
	Supply voltage	[VDC]	24 VDC Supplied by the InSite modular bus
	Connection		InSite modular bus
	Power consumption	[W]	0.24 (idle mode)
	Communication protocol		LTE/4G
	Sim size		Micro SIM (3FF)
	Frequency band		LTE-FDD B1/B3/B5/B7/B8/B20
	Max RF output power	[dBm]	23
	External antenna specs (no internal antenna available)		Male SMA / 50 Ohm 0.8 - 2.6 GHz
	Market region		EU
	Antenna extension cable	[m]	< 3
	Mounting method		35 mm DIN-rail (DIN 5022)
	Degree of protection		IP20
	Dimensions	[mm]	17.5x87x64.9 (1M)
	Weight	[g]	~70
	Operating temperature	[°C]	-25...+60
	Storage temperature	[°C]	-40...+85
	Operating altitude	[m]	0...2000
	Standards		EN 61010-1 / IEC 61010-1
			EN IEC 61326-1
			ETSI EN 300-489-52
			ETSI EN 301-908-1
	ABB Antenna		2CMA269075R1000

For indoor use only. For European countries only.

NEW Antenna for the InSite system
INS-ATE

Tested antenna for all wireless connections of the InSite range (SCU200-W, INS-LORA, INS-LTE & INS-WM modules)

Possibility to extend the antenna via an external adaptor up to 3 meters

INS-ATE	Technical feature	Unit	Description
	Category		RF and Wireless RF Antennas
	Compatibility		InSite wireless system: SCU200 W, INS-LORA, INS-LTE, INS-WM
	Antenna type		Whip, straight
	Communication protocol		LTE
	Part Status		Active
	RF Family/Standard		Cellular
	Frequency Group		Wide Band
	Frequency (Center/Band)	[MHz, GHz]	829MHz, 1.228GHz, 1.505GHz, 1.762GHz, 1.94GHz, 2.43GHz, 3.65GHz, 4.5GHz, 5.5GHz
	Frequency Range	[MHz, GHz]	698MHz ~ 960MHz, 824MHz ~ 1.28GHz, 1.176GHz ~ 1.61GHz, 1.4GHz ~ 2.17GHz, 1.71GHz ~ 2.69GHz, 2.17GHz ~ 2.7GHz, 3.3GHz ~ 4GHz, 4GHz ~ 5GHz, 5GHz ~ 6GHz
	Number of Bands		9
	VSWR		3
	Gain	[dBi]	1.7dBi, 1.9dBi, 3dBi, 2.6dBi
	Termination		SMA Male
	Mounting method		Connector Mount
	Ingress protection		IP55
	Height (Max)	['', mm]	7.480" (190.00 mm)

NEW LoRa Communication module
INS-LORA

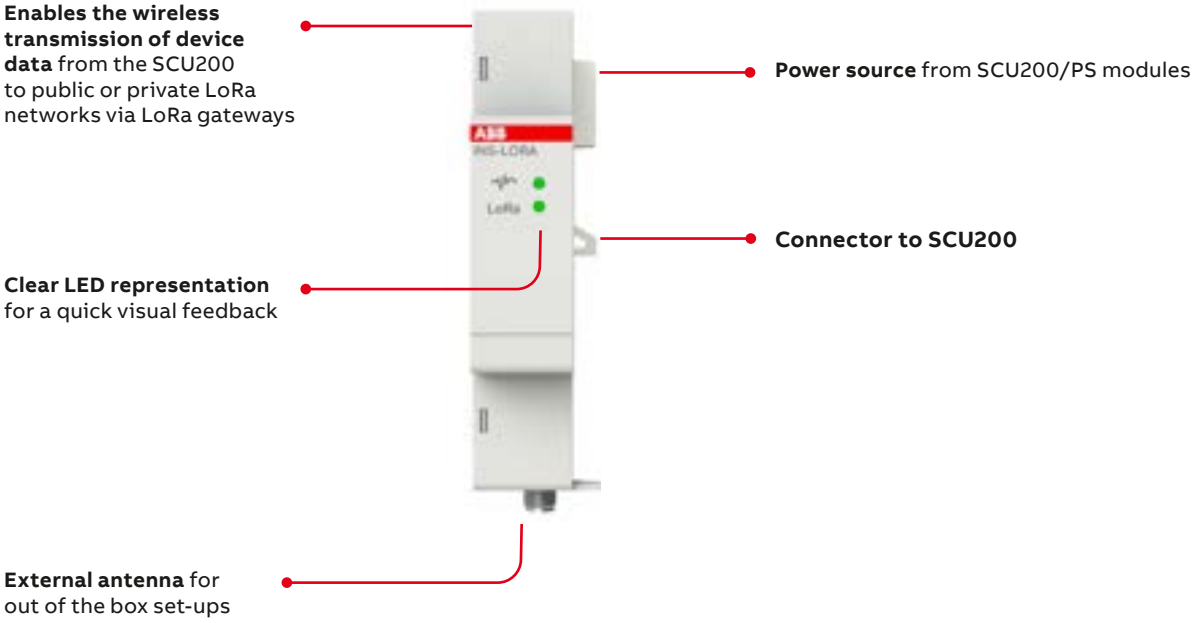

INS-LORA	Technical feature	Unit	Description
	Supply voltage	[VDC]	24 VDC Supplied by the InSite modular bus
	Connection		InSite modular bus
	Power consumption	[W]	0.5
	Communication protocol		LoRa WAN
	Frequency band	[MHz]	868
	Market region		EU
	RF output power	[dBm]	+22 (max.)
	Embedded internal antenna	[dBi]	-0.4 peak gain
	External antena (not included)		Male SMA / 50 Ohm / 868 MHz
	Extension cable length	[m]	< 3
	Mounting method		35 mm DIN-rail (DIN 5022)
	Degree of protection		IP20
	Dimensions	[mm]	17.5x87x64.9 (1M)
	Weight	[g]	65
	Operating temperature	[°C]	-25...+60
	Storage temperature	[°C]	-40...+85
	Operating altitude	[m]	0...2000
	Standards		EN 61010-1 / IEC 61010-1
			EN IEC 61326-1
			ETSI EN 301-489-3
			ETSI EN 300-220-2
	ABB Antenna		2CMA269075R1000

For indoor use only. For European countries only.

NEW Collector Hub module
INS-HUB

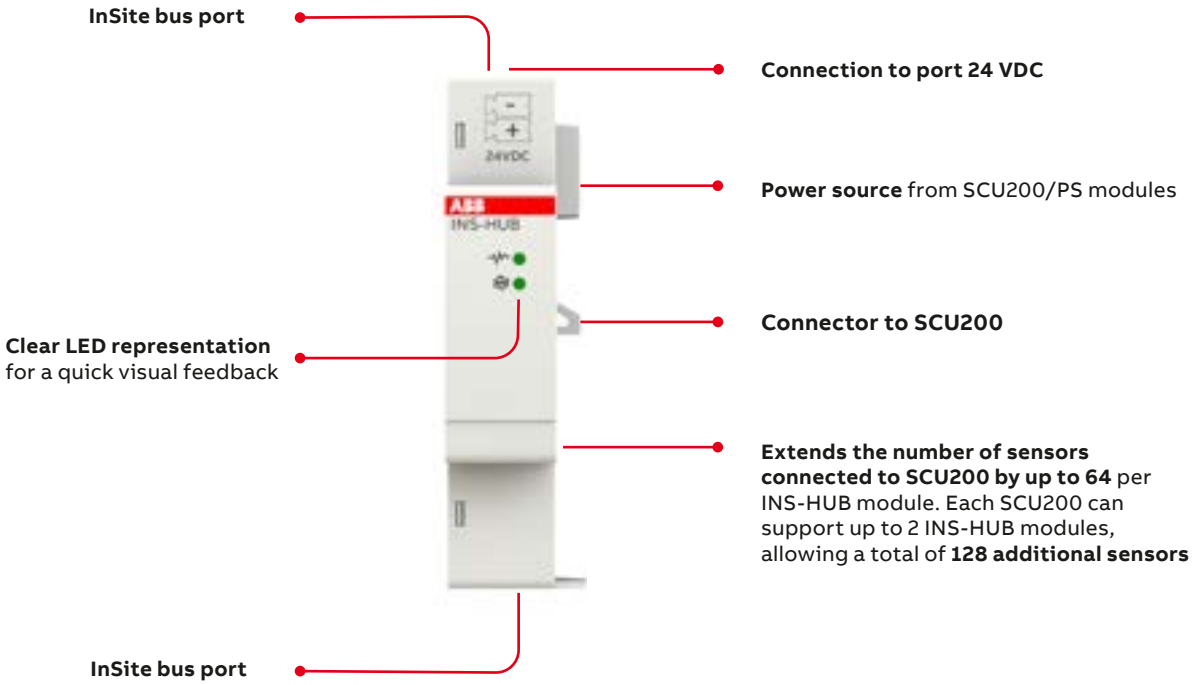

INS-HUB	Technical feature	Unit	Description
	Supply voltage	[VDC]	24 +/- 10%
	Connection		InSite modular bus
	Power consumption	[W]	1 (Idle mode - without sensors)
			20 (full mode - with full sensors)
	Communication ports		InSite bus (x2)
	Power supply 24 VDC connection		
	Conductor cross section solid/flexible	[mm²]	0.2...1
	AWG	[AWG]	28...17
	Strip length	[mm]	10
	Mounting method		35mm DIN-rail (DIN 5022)
	Degree of protection		IP20
	Dimensions	[mm]	17.5x87x64.9 (1M)
	Weight	[g]	~ 56
	Operating temperature	[°C]	-25...+60
	Storage temperature	[°C]	-40...+85
	Operating altitude	[m]	0...2000
	Standards		EN 61010-1 / IEC 61010-1
			EN IEC 61326-1

For indoor use only.

Integrated devices
with SCU100 and SCU200

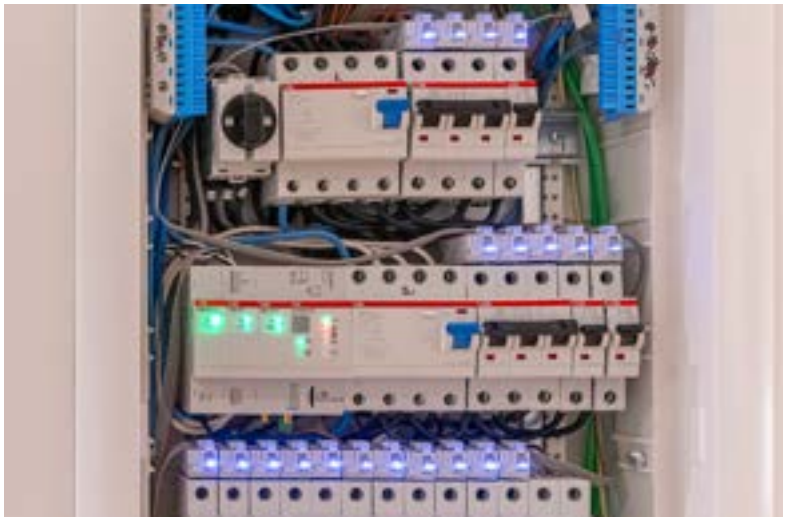

The InSite energy management system monitors a wide range of connected devices, including breakers, meters, EV chargers, and further electrical assets.

Integrated devices such as current sensors and smart accessories are automatically recognized by the InSite system once they are connected.

Branch monitoring sensors

—
01

—
02

—
03



—
04

—
01
Solid-core sensor

—
02
Open-core sensor

—
03
Connectors

—
04
InSite flat cable (INS)
for an easy and fast connection of CMS sensors, I/O modules and smart accessories

Integrated devices
with SCU100 and SCU200

Smart accessories

—
05

—
06

—
07

—
08

—
05
Smart Auxiliary and Signalling device for protection device smart monitoring

—
06
Digital I/O modules for recognizing digital inputs or sending digital outputs

—
07
Tap-off Box module for conversion of flat cable communication to RJ45 and vice versa

—
08
ModBus Interface for MOD/AR ranges eMOD/AR ModBus

Meters, protection devices, and displays

—
09

—
10

—
11

—
12

—
13

—
09
Energy meters

—
10
Power meters

—
11
Digital surge protective device eOVR

—
12
Network Analyzers

—
13
HMI Display INS-HMI

Branch monitoring sensors

The current sensors measure current on each branch and communicate with both SCU100 and SCU200 control units.
They can be easily mounted and, despite their small size, deliver exceptional performance and are capable of monitoring AC, DC, and mixed (TRMS) currents up to 160 A, including harmonic components.

Each sensor is equipped with a microprocessor to process signals and transmit data digitally to the control unit via the bus interface. This reduces cabling needs, enhances transmission reliability, and eliminates common issues associated with analog data.

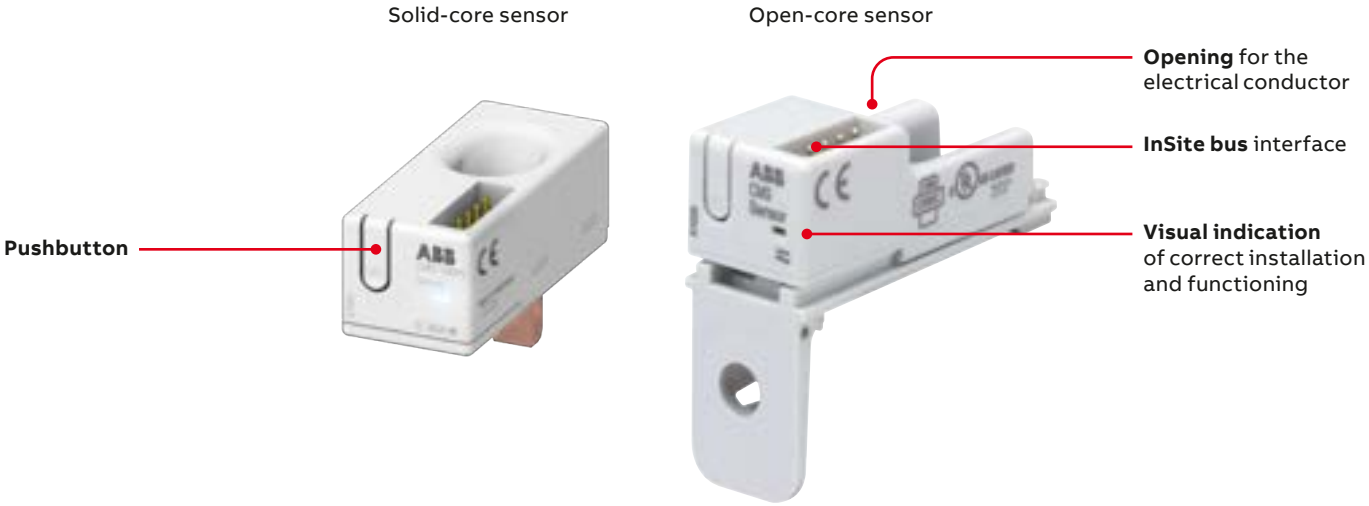

Tailor the integration of the current sensors to your installation by selecting from up to four different mounting options, depending on the specific application, to ensure a simple and uncomplicated process.

		System pro M, SMISSLINE		S800	DIN rail	Cable tie
						
Mounting method	for all MCBs, RCDs, RCBOs with twin terminals	for MCBs (S200, SMISSLINE) and RCBOs (SMISSLINE)	for fuse holders E90	for all S800 devices with cage terminals	universally usable	universally usable
Open-core sensors						
AC accuracy* of ≤ ± 1.0% The laying method influences the accuracy.						
18-mm overall width						
CMS-120xx (80 A)	CMS-120PS	CMS-120LA	-		CMS-120DR	CMS-120CA
CMS-121xx (40 A)	CMS-121PS	CMS-121LA	CMS-121FH		CMS-121DR	CMS-121CA
CMS-122xx (20 A)	CMS-122PS	CMS-122LA	CMS-122FH		CMS-122DR	CMS-122CA
Solid-core sensors						
AC accuracy* of ≤ ± 0.5%						
18-mm overall width						
CMS-100xx (80 A)	CMS-100PS			CMS-100S8	CMS-100DR	CMS-100CA
CMS-101xx (40 A)	CMS-101PS			CMS-101S8	CMS-101DR	CMS-101CA
CMS-102xx (20 A)	CMS-102PS			CMS-102S8	CMS-102DR	CMS-102CA
25-mm overall width						
CMS-200xx (160 A)				CMS-200S8	CMS-200DR	CMS-200CA
CMS-201xx (80 A)				CMS-201S8	CMS-201DR	CMS-201CA
CMS-202xx (40 A)				CMS-202S8	CMS-202DR	CMS-202CA

* All accuracy specifications refer to the relevant full scale value and apply to 25°C

CMS-120LA

CMS-120FH

CMS-120PS

CMS-120CA

Open core sensors 18 mm

Sensor type			CMS-120xx	CMS-121xx	CMS-122xx
Measurement range		[A]	80	40	20
Measurement method			TRMS, AC 50 / 60 Hz, DC		
Peak value of the distorted wave-form			≤ 1.5	≤ 3	≤ 6
AC accuracy (TA = 25 °C)*			≤ ± 1 %		
AC* temperature coefficient			≤ ± 0.04 %		
DC accuracy (TA = 25 °C)*			≤ ± 1.2 %	≤ ± 1.4 %	≤ ± 1.8 %
DC* temperature coefficient			≤ ± 0.14 %	≤ ± 0.24 %	≤ ± 0.44 %
Resolution		[A]	0.01		
Internal sampling rate		[Hz]	5000		
Respond time (±1 %)		[sec]	Type 0.34		
Max. diameter of the cable		[mm]	9.6		
Insulation			690 V AC /1500 V DC		
Operating temperature		[°C]	– 25...+70		
Storage temperature		[°C]	–40...+ 85		
Size	CMS-120PS series	[mm]	17.4 x 41.0 x 26.5		
	CMS-120CA series	[mm]	17.4 x 41.0 x 29.0		
	CMS-120DR series	[mm]	17.4 x 51.5 x 43.2		
	CMS-120LA series	[mm]	17.4 x 41.0 x 38.9		
	CMS-120FH series	[mm]	17.4 x 41.0 x 38.9		
Reference standard			IEC 61010-1 | UL508 / CSA C22.2 No 14		

* All accuracy specifications refer to full scale value and apply at 25° C.
In the case of open-core sensors, the position of the cable affects accuracy.

CMS-120DR

CMS-100PS

CMS-100S8

CMS-100DR

CMS-100CA

CMS-200S8

CMS-200DR

CMS-200CA

Solid-core sensors 18 mm

Sensor type			CMS-100xx	CMS-101xx	CMS-102xx
Measurement range		[A]	80	40	20
Measurement method			TRMS, AC 50 / 60 Hz, DC		
Peak value of the distorted wave-form			≤ 1.5	≤ 3	≤ 6
AC accuracy (TA = 25 °C)*			≤ ± 0.5 %		
AC* temperature coefficient			≤ ± 0.036 %		
DC accuracy (TA = 25 °C)*			≤ ± 0.7 %	≤ ± 1.0 %	≤ ± 1.7 %
DC* temperature coefficient			≤ ± 0.047 %	≤ ± 0.059 %	≤ ± 0.084 %
Resolution		[A]	0.01		
Internal sampling rate		[Hz]	5000		
Respond time (±1 %)		[sec]	Type 0.25		
Max. diameter of the cable		[mm]	10		
Insulation		[V]	690 V AC / 1500 V DC		
Operating temperature		[°C]	−25 ...+70		
Storage temperature		[°C]	−40...+85		
Size	CMS-100PS series	[mm]	17.4 x 41.0 x 26.5		
	CMS-100S8 series	[mm]	26.5 x 45.5 x 31.8		
	CMS-100DR series	[mm]	17.4 x 51.5 x 43.2		
	CMS-100CA series	[mm]	17.4 x 41.0 x 29.0		
Reference standard			IEC 61010-1 | UL508 / CSA C22.2 No 14		

* All accuracy specifications refer to the relevant full scale value and apply at 25° C.

Solid-core sensors 25 mm

Sensor type			CMS-200xx	CMS-201xx	CMS-202xx
Measurement range		[A]	160	80	40
Measurement method			TRMS, AC 50 / 60 Hz, DC		
Peak value of the distorted wave-form			≤ 1.5	≤ 3	≤ 6
AC accuracy (TA = +25°C)*			≤ ± 0.5 %		
AC* temperature coefficient			≤ ± 0.036 %		
DC accuracy (TA = +25°C)*			≤ ± 0.7 %	≤ ± 1.0 %	≤ ± 1.7 %
DC* temperature coefficient			≤ ± 0.047 %	≤ ± 0.059 %	≤ ± 0.084 %
Resolution		[A]	0.01		
Internal sampling rate		[Hz]	5000		
Respond time (±1 %)		[sec]	Type 0.25		
Max. diameter of the cable		[mm]	15		
Insulation		[V]	690 V AC / 1500 V DC		
Operating temperature		[°C]	−25...+70		
Storage temperature		[°C]	−40...+85		
Size	CMS-200S8 series	[mm]	26.5 x 43.0 x 38.5		
	CMS-200DR series	[mm]	25.4 x 43.0 x 43.2		
	CMS-200CA series	[mm]	25.4 x 43.0 x 35.7		
Reference standard			IEC 61010-1 | UL508 / CSA C22.2 No 14		

* All accuracy specifications refer to the relevant full scale value and apply at 25 °C.

InSite flat cable and connector set

The control units require a flat cable to gather information from current sensors and digital I/O modules. A connector set contains 35 connector housings and connectors for connecting the flat cable to the sensors smart accessories. InSite flat cables come in different lenghts (2, 5, 10 and 30m). These devices can be placed at customizable distances as needed for the specific application.



Smart Auxiliary & Signalling device
INS-S/H

The InSite system features smart signaling devices that combine the functions of both a signaling device and an auxiliary device in a sleek design, occupying just 0.5 module width. These devices can be connected directly to the control units using the flat cable and are automatically detected and assigned in the webserver.
When the adjacent breaker trips, they alert users or provide information about the trip and toggle switch position. The SCU100 control supports connectivity for up to 96 smart signaling devices, while SCU200 can accommodate up to 32 smart signaling devices.

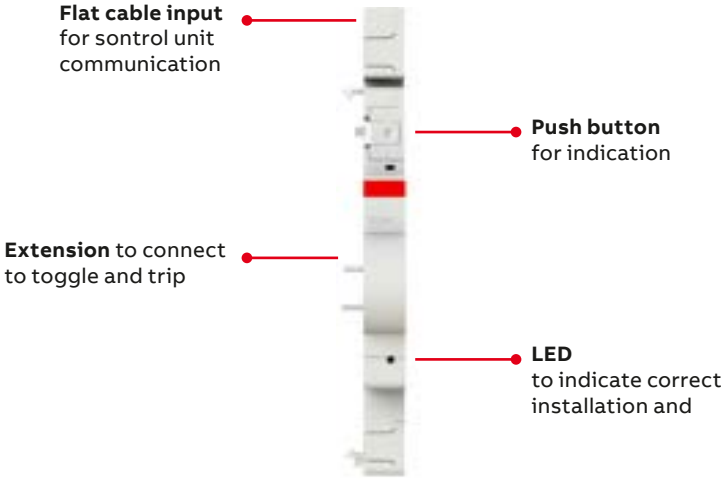

INS-S/H	Technical feature	Unit	Description
	Supply voltage	[VDC]	Supplied by the InSite bus
	Connection		InSite bus
	Power loss	[W]	0,1
	Mounting Position		Right
	Pluggable accessories		S2CHR (x2)
			S2C-S/HR (x2)
	Mounting method		35mm DIN rail (DIN 5022)
	Degree of protection		IP20
	Dimensions	[mm]	8.8x103x74
	Weight	[g]	30
	Operating temperature	[°C]	-25... +60
	Storage temperature	[°C]	-40... +85
	Operating altitude	[m]	0... 2000
	Standards		IEC61010-1
			IEC 61326-1
			IEC 60068
			IEC / EN 62019 for Main functionality
			IEC 60947-5-1 for Main functionality
			IEC61009 for RCDs compatibility
			EN 60898-1 for MCBs compatibility

Compatible ABB ranges with INS-S/H

	Type of device	ABB System pro M compact
	Miniature circuit breakers (MCB)	S200, S300P
	Residual current devices (RCD)	F200, DS201
	Arc fault detection devices (AFDD)	S-ARC1, DS-ARC1
	Switch disconnectors	SD200

Digital I/O modules
DM00, DM10, DM11

The digital Input/Output (I/O) modules offer a versatile range of functions, including reading contact status, activating or deactivating lines, and collecting utilities' consumption. The three types of digital signaling modules can be connected to both SCU100 and SCU200 control units and cater to diverse requirements: DM00, which reads up to 4 input signals, DM11, which generates 4 output signals, and DM10, featuring 4 ports of 2 input signals and 2 output signals. These modules can be connected to System pro M compact® accessories of MCBs and RCDs, as well as to other DIN-Rail products with digital input or output, and to pulse meters (e.g. water and gas meters). In addition to reading contact status and collecting utility consumptions, the output modules can generate signals on demand to control loads or activate or deactivate lines.

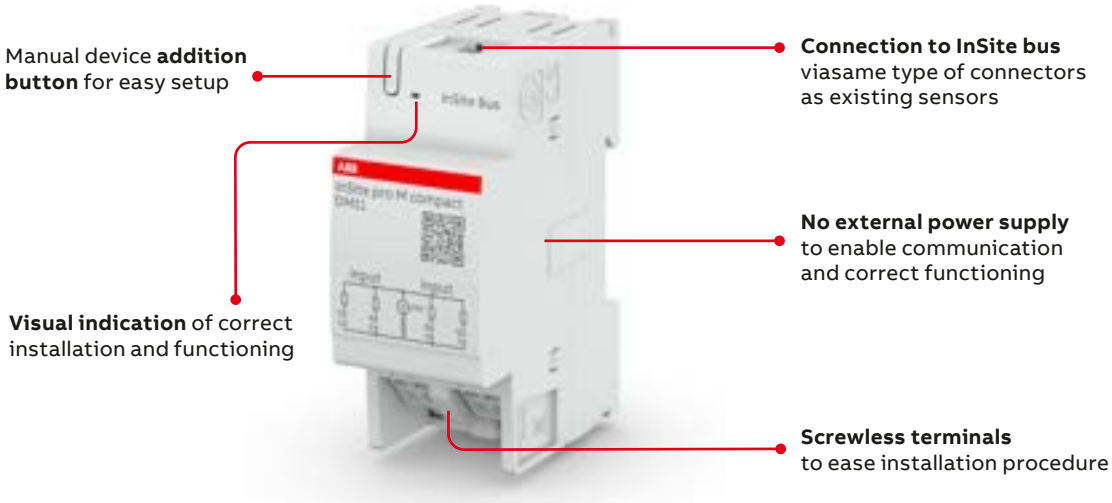

Input and Output modules	Technical feature	Unit	Input module DM11	Output module DM00	Input and Output module DM10
	Number of digital channels		4 Input	4 Output	2 Input + 2 Output
	Voltage (min - max)*		active input: 22-26 Vdc	relay output: 5V DC-240V AC	active input: 22-26Vdc relay output: 5V DC-240V AC
	Current (min - max)*		active input: 4mA	relay output:5mA-2.5A Max 4,5A (<5sec)	active input: 4mA relay output: 5mA - 2.5A Max 4,5A (<5sec)
	Pulse minimum duration**	[ms]	5	n/a	5
	Pulse frequency**	[Hz]	100	n/a	100
	Terminals cross section	[mm2]	2,5	2,5	2,5
	Mounting method		35 mm DIN rail (DIN 50022) or SMISSLINE TP plug base		
	Degree of protection		IP20	IP20	IP20
	Dimensions	[mm]	36x88x65	36x88x65	36x88x65
	Operating temperature	[°C]	-25...+60	-25...+60	-25...+60
	Storage temperature	[°C]	-40...+85	-40...+85	-40...+85
	Standards		IEC 61010	IEC 61010	IEC 61010

*Relay output values reported are applicable to resistive load **Applicable only to active inputs

Compatible ABB ranges with DM modules

Type of device	ABB System pro M compact
Molded case circuit breakers (MCCB)	Tmax XT
Miniature circuit breakers (MCB)	S200, SN200, S300P, S800
Residual current devices (RCD)	F200, DS200, DS800, DDA
Arc fault detection devices (AFDD)	S-ARC1, DS-ARC1
Switch disconnectors	SD200

InSite Tap-off Box module
INS-TB

Designed for data center busway applications, the Tap-off Box module allows the InSite bus to be converted to RJ45, enabling sensor connections in individual tap-off boxes without requiring a full SCU200 unit.

With the SCU200 installed only in the main (master) box, Tap-off Box modules extend its capabilities up to 70 meters, allowing easy integration of sensors at multiple tap-off points.

Flat cable and RJ45 Ports on top

Switch button: Change switch position only to the last INS-TB module of the daisy chain

RJ45 Port on bottom

INS-TB	Technical feature	Unit	Description
	Supply voltage	[VDC]	Passive device
	Connection		InSite bus and Ethernet
	Mounting method		35mm DIN rail (DIN 5022)
	Degree of protection		IP20
	Dimensions	[mm]	17.5x87.0x64.9 (1M)
	Weight	[g]	45
	Pollution degree		2
	Operating temperature	[°C]	-25...+60
	Storage temperature	[°C]	-40...+85
	Standards		EN 61010-1 / IEC 61010-1
	Declarations		UKCA / CE
	Voltage level	[DC]	7V (min) - 9.5V (max)
	All connection shall be done with SELV circuit		
	Ethernet communication ports type		10baseT (IMPORTANT: DO NOT CONNECT THIRD PARTY EQUIPMENT TO DEVICE, INTERNAL PROPRIETARY PROTOCOL)

Please use the cable length calculator to determine the maximum allowable length of RJ45 cables.
https://search.abb.com/library/Download.aspx?DocumentID=9AKK108471A3289&LanguageCode=en&Doc

NEW ModBus Interface for MOD & AR
eMOD/AR ModBus

Connectivity
Ensures seamless integration with the InSite energy management system and enables communication with third-party services.

Control & Easy access to data
Remote control and continuous monitoring provide easy access to both real-time and historical data through the InSite Energy Management Platform.

Compactness
Extremely compact, taking up only 0.5 modules of space, which ensures efficient space-saving.

eMOD/AR ModBus	Technical characteristic	Unit	Description
	Suitable for *		S3C-MOD230, S3C-MOD24, F3C-AR24, F3C-AR230, F3C-AR230 D F3C-AR230 C, F3C-AR230C H
	Number of modules		Half module
	Connection		InSite control unit (SCU200 / SCU200-W) or Third-party Network
	Communication Protocol		ModBus RTU
	RS485 Cross-section of conductors		
	Solid/flexible	mm^2	0.14...0.15
	Solid	AWG	28-16
	Flexible	AWG	26-14
	Power loss	W	<1.0
	Mounting Position		Right for compatible devices
	Pluggable accessories		Not allowed
	Mounting method		35mm DIN rail (DIN 5022)
	Degree of protection		IP40
	Maximum number of eMOD/AR units that can be connected to the SCU200		8
	Parity		Even (default), Odd, None
	Transmission speed (Baud Rate)		2400, 4800, 9600, 19200 (default), 38400, 57600,115200
	Dimensions	mm	8.8x85x74
	Weight	g	30
	Operating temperature	°C	-25...+60
	Storage temperature	°C	-40...+70
	Operating altitude	m	0...2000
	Standards		EN 61010-1 / IEC 61010-1 / EN IEC 61326-1

* eMOD/AR is compatible with S3C-MOD230, F3C-AR230, F3C-AR230 D produced only after 31/01/2025. The production date of S3C-MOD230, F3C-AR230, F3C-AR230 D is reported on external label on the packaging and on the device (fomat WWYY).

The Motor Operating Devices (MOD) & Auto-Reclosing units (AR), when combined with the ModBus Interface (eMOD/AR ModBus), can connect to either the InSite web server or a third-party network.

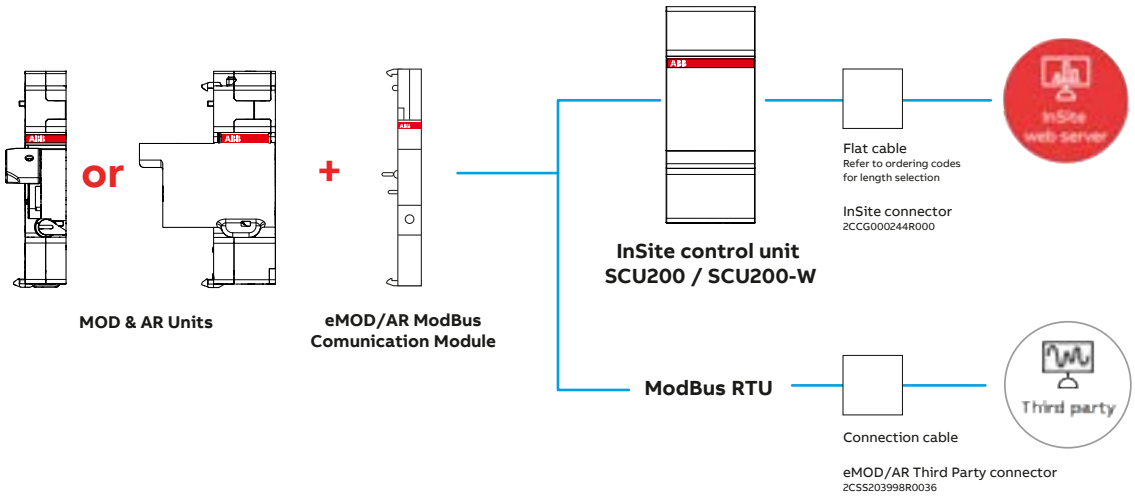

NEW HMI Display
INS-HMI

Effortless access
- No laptop required to connect to the Web UI

Field-friendly device
- Simplified view from the InSite web server, tailored for field personnel

Rapid response & instant visibility
- Clear visualization of events and data for quick, informed decisions
- Provides instant access to electrical parameters measured and collected by the InSite energy managmenet system

INS-HMI	Technical feature	Unit	Description
	Power		
	Supply voltage	[VDC]	24 +/- 10%
	Power consumption	[W]	3.6 idle mode, 36 rated
	Protection against reverse polarity		Yes
	Connection at the panel		DC standard: Ø5.5, Ø2.5 (plug included)
	Product data		
	Size diameter		10.1''
	Resolution		1280 x 800 pixel
	Type		TFT LCD, 16M colors
	Touch screen		Capacitive PCAP multi-touch glass cover lens brightness 300 CD/Mq
	System properties		
	Processor type		Quad-Core ARM Cortex-A55
	Operating system		Linux
	RAM		2GB LPDDR4
	Flash memory		16 GB eMMC
	Card slot		micro SD card / TF card
	Interfaces		
	Network Interface		1 x 10/100 Mbit/s RJ45
	USB port 1		2.0 - max. 500 mA
	USB port 2		2.0 - max. 500 mA
	Environmental conditions		
	Operating temperature	[°C]	-10...+50
	Storage temperature	[°C]	-20...+60
	Humidity		90% RH, non-condensating
	Operating altitude	[m]	0...2000
	Mechanical specifications		
	Dimensions	[mm]	262 x 176 x 41 (+/-1)
	Degree of protection		IP64 front - IP20 rear
	Mounting method		Panel mounting in cutout
	Moutning variant		Landscape mode
	Weight	[kg]	1.3
	Standards		EN 61010-1 / IEC 61010-1
			EN 55032 / EN 55035

For indoor use only.

Ordering data
Control units, modules and accessories

Description	GTIN 7612271 EAN	Ordering details		Weight of 1 unit (kg)	Packaging unit (pce.)
		Brief description	Order code		
Control Units					
Control Unit	516284	SCU200	2CCG001158R0001	0.101	1
Control Unit with wireless interface	516277	SCU200-W	2CCG001157R0001	0.105	1
Sub-distribution Control Unit	508104	SCU100	2CCG000242R0001	0.329	1
Integrated devices					
Smart Signal/Auxiliary Contact	516826	INS-S/H	2CCG001213R0001	0.028	1
Digital Input Module (4 inputs)	508135	DM11	2CCG000245R0001	0.075	1
Digital Output Module (4 outputs)	508142	DM00	2CCG000246R0001	0.085	1
Digital Input and Output Module (2 inputs, 2 outputs)	508159	DM10	2CCG000247R0001	0.080	1
Tap-off Box Module	680758	INS-TB	2CMA268075R1000	0.045	1
COMM Third Party conn	834151	Connector 25.5 mm	2CSS203998R0036	0.005	1
Modbus Interface for MOD/AR ranges	540151	eMOD/AR ModBus	2CSS201998R0036	0.030	1
InSite HMI display	784654	INS-HMI	2CMA278465R1000	1.300	1
Metering, expansion and communication modules for SCU200					
Split-core Current Transformer - 20A	516437	CTS-1-20	2CCG001154R0001	0.045	1
Split-core Current Transformer - 50A	516444	CTS-1-50	2CCG001155R0001	0.045	1
Split-core Current Transformer - 80A	516451	CTS-1-80	2CCG001156R0001	0.045	1
Energy Meter Module - 40mA	516291	INS-E3	2CCG001159R0001	0.052	1
Energy Meter Module - 5A	681359	INS-E3-5	2CMA268055R1000	0.052	1
Power Supply Module - 10W	516406	INS-PS-1	2CCG001160R0001	0.077	1
Power Supply Module - 30W	516420	INS-PS-2	2CCG001172R0001	0.110	1
Wireless M-bus Module	516413	INS-WM	2CCG001171R0001	0.048	1
USB Module	518202	INS-USB	2CCG001351R0001	0.046	1
LTE Connectivity Module	681250	INS-LTE	2CMA268125R1000	0.100	1
Antenna for the InSite system	690757	INS-ATE	2CMA269075R1000	0.0075	1
LoRa Communication module	681359	INS-LORA	2CMA268135R1000	0.100	1
Collector Hub Module	784555	INS-HUB	2CMA278455R1000	0.100	1
Flat cable connection accessories					
Flat cable 2m	519803	INS102	2CCG001491R0001	0.017	1
Flat cable 5m	508111	INS105	2CCG000243R0001	0.046	1
Flat cable 10m	519810	INS110	2CCG001493R0001	0.090	1
Flat cable 30m	519827	INS130	2CCG001494R0001	0.270	1
Connector set (35pcs)	508128	INS135	2CCG000244R0001	0.024	35

Ordering data
Current sensors

CMS-120LA

CMS-120PS

CMS-120DR

CMS-120CA

CMS-100PS

CMS-100S8

CMS-100DR

CMS-100CA

Description	GTIN 7612271 EAN	Ordering details		Weight of 1 unit (kg)	Packaging unit (pce.)
		Brief description	Product no.		
Open-Core Sensors, 18 mm					
Retrofit for DIN-rail protection devices and SMISSLINE					
80 A	498627	CMS-120LA	2CCA880225R0001	0.012	1
40 A	498610	CMS-121LA	2CCA880226R0001	0.012	1
20 A	498603	CMS-122LA	2CCA880227R0001	0.012	1
Mounting on DIN-rail protection devices and SMISSLINE					
80 A	452957	CMS-120PS	2CCA880210R0001	0.012	1
40 A	452971	CMS-121PS	2CCA880211R0001	0.012	1
20 A	452995	CMS-122PS	2CCA880212R0001	0.012	1
DIN-rail mounting					
80 A	453077	CMS-120DR	2CCA880240R0001	0.015	1
40 A	453091	CMS-121DR	2CCA880241R0001	0.015	1
20 A	453114	CMS-122DR	2CCA880242R0001	0.015	1
Mounting on cable with cable tie					
80 A	453015	CMS-120CA	2CCA880220R0001	0.011	1
40 A	453039	CMS-121CA	2CCA880221R0001	0.011	1
20 A	453053	CMS-122CA	2CCA880222R0001	0.011	1
Solid-Core Sensors, 18 mm					
Mounting on DIN-rail protection devices and SMISSLINE					
80 A	419202	CMS-100PS	2CCA880100R0001	0.012	1
40 A	419219	CMS-101PS	2CCA880101R0001	0.012	1
20 A	419226	CMS-102PS	2CCA880102R0001	0.012	1
Mounting on High Performance Circuit Breakers S800					
80 A	426552	CMS-100S8	2CCA880124R0001	0.014	1
40 A	426569	CMS-101S8	2CCA880125R0001	0.014	1
20 A	426576	CMS-102S8	2CCA880126R0001	0.014	1
DIN-rail mounting					
80 A	426583	CMS-100DR	2CCA880128R0001	0.015	1
40 A	426590	CMS-101DR	2CCA880129R0001	0.015	1
20 A	426606	CMS-102DR	2CCA880130R0001	0.015	1
Mounting on cable with cable tie					
80 A	426613	CMS-100CA	2CCA880107R0001	0.011	1
40 A	426620	CMS-101CA	2CCA880108R0001	0.011	1
20 A	426637	CMS-102CA	2CCA880109R0001	0.011	1

Ordering data
Current sensors

CMS-200S8

CMS-200DR

CMS-200CA

Description	GTIN 7612271 EAN	Ordering details		Weight of 1 unit (kg)	Packaging unit (pce.)
		Brief description	Order code		
Solid-Core Sensors, 25 mm					
Mounting on High Performance Circuit Breakers S800					
160 A	426644	CMS-200S8	2CCA880136R0001	0.028	1
80 A	426651	CMS-201S8	2CCA880137R0001	0.028	1
40 A	426668	CMS-202S8	2CCA880138R0001	0.028	1
DIN-rail mounting					
160 A	426675	CMS-200DR	2CCA880132R0001	0.030	1
80 A	426682	CMS-201DR	2CCA880133R0001	0.030	1
40 A	426699	CMS-202DR	2CCA880134R0001	0.030	1
Mounting on cable with cable tie					
160 A	426705	CMS-200CA	2CCA880117R0001	0.026	1
80 A	426712	CMS-201CA	2CCA880118R0001	0.026	1
40 A	426729	CMS-202CA	2CCA880119R0001	0.026	1

InSite configurator

Start configuring now!

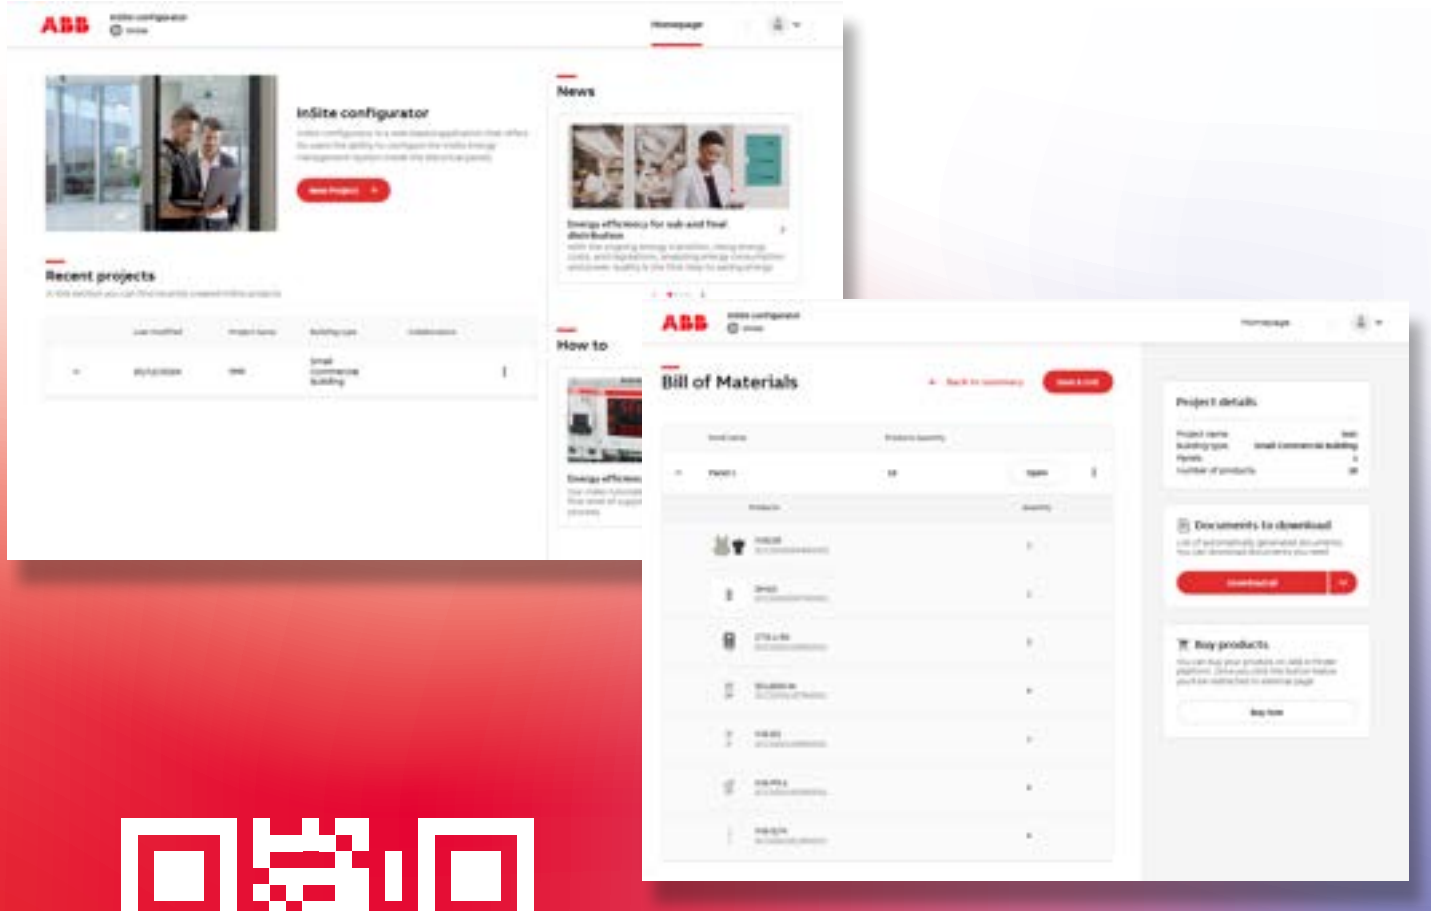

InSite configurator

Energy efficiency

Voltmetric and current switches

MCV

Technical features		
Insulation voltage	[V]	600
Rated thermal current	[A]	12
Mechanic operations	[No.]	1000000
Power consumption	[VA]	0.23
Modules	[No.]	3

MCV - MCA voltmetric and current switches

Cam rotary switches are suitable for mounting on EN 50022 rail. In three-phase systems they enable the use of a single measurement instrument (single-phase) for viewing the current or voltage value set through the switch itself.

MCA

Voltmeter switches						
Range	**Power loss**	**Bbn 7392696**	**Order details**		**Weight 1 piece**	**Pack unit**
	W	**EAN**	**Type code**	**Order code**	**kg**	**pc.**
L1, L2, L3	0.5	522469	MCV 4	1SCA022404R4740	0.095	1
L1, L2, L3, N	0.5	522438	MCV 7	1SCA022647R7840	0.110	1

Current switches						
Range	**Power loss**	**Bbn 7392696**	**Order details**		**Weight 1 piece**	**Pack unit**
	W	**EAN**	**Type code**	**Order code**	**kg**	**pc.**
0-1-2-3	0.5	522452	MCA 4	1SCA022404R4821	0.110	1

QCA 48

Front panel QCV - QCA voltage and current switches

For use in three-phase systems, to allow a single device to measure the voltage and current settings adjusted by the switches.

Measure	Position	Bbn 7392696	Order details		Weight 1 piece	Pack unit
		EAN	**Type code**	**Order code**	**kg**	**pc.**
Voltage	4	527990	QCV-4/48	1SCA022780R0770	0.150	1
Current	4	528003	QCA-4/48	1SCA022780R0690	0.150	1
Voltage	7	527983	QCV-7/48	1SCA022780R0850	0.150	1

QCV 48

Energy efficiency

E 233 hour counters

E 233

Technical features		
	AC equipment	DC equipment
Rated voltage	50 Hz: 24 V, 230 V 60 Hz: 24 V, 120 V, 240 V	DC 12 V ... 48 V
Voltage tolerance	±15 %	±10 %
Power consumption	1.5 VA	ca. 20 mW (at 12 V DC)
Ambient temperature	–15 °C/5 °F... +50 °C/122 °F	–10 °C/14 °F ... +50 °C/122 °F
Counting capacity	99.999 h	99.999 h
Reading accuracy	0.01 h	0.1 h
Operation display	fast running	LED blinking
Protection against electric shock	according to DIN VDE 0106 Part 100 (BGV A2)	according to DIN VDE 0106 Part 100 (BGV A2)
Terminal size	up to 10 mm^2	up to 10 mm^2

E 233 electro-mechanical hour counters

Hour counters are used to record operating times as well as to determine idle times and off times of industrial machinery and plant, for commercial purposes or in domestic installations. No reset functionality.

Rated voltage	Bbn 4012233	Order details		Weight 1 piece	Pack unit
	EAN	Type code	Order code	kg	pc.
AC 230 V/50 Hz	630004	E 233-230	2CDE100000R1601	0.05	10
AC 24 V/50 Hz	630103	E 233-24	2CDE400000R1601	0.05	10
DC 12 V ... 48 V	630202	E 233-12/48	2CDE300010R1601	0.05	10
AC 240 V/60 Hz	365901 ①	E 233-240/60 Hz	2CDE100021R1601	0.05	10
AC 120 V/60 Hz	366007 ①	E 233-120/60 Hz	2CDE600021R1601	0.05	10
AC 24 V/60 Hz	366106 ①	E 233- 24/60 Hz	2CDE400021R1601	0.05	10

① Bbn No. 4016779

Energy efficiency

HMT hour counters

HMT

Technical features		
Rated voltage Un	[V]	a.c. 24 a.c. 110 a.c. 230
Displayed digits (in hours)	[n°]	99,999.9 (for HMT1 and HMT11)
Accuracy class	[%]	0.5
Frequency	[Hz]	50
Power consumption	[W]	1.1...2.2
Modules	[No.]	2

HMT electro-mechanical hour counters

Equipped with 7-digit indicator (99.999,99) and available in two modules.
They cannot be reset.

Rated voltage	Bbn 8012542	Order details		Weight 1 piece	Pack unit
V AC	EAN	Type code	Order code	kg	pc.
24	030300	HMT 1/24	2CSM111000R1601	0.200	6
110	030409	HMT 1/110	2CSM121000R1601	0.200	6
230	030508	HMT 1/220	2CSM131000R1601	0.200	6
230	030607	HMT 11	2CSM133000R1601	0.200	1

Energy efficiency

TMD temperature control units

TMD

Technical features			
Auxiliary supply	Alternating current	[V]	20÷250 ±15%
	Direct current	[Hz]	115-230-400 50-60
Power consumption		[VA]	4 max
Input	Sensor		PT100 RTD (not included)
	Type		3 wires (2 and 4 wires types are also supported)
	Error		1 degree every 0,39 Ω
	Measure range	[°C]	0...220 ± 2
	Compensation	[Ω]	20 max
	Trip delay/hysteresis	[s/°C]	5/2
Output	Number		4
	Type		NO-CO-NC
	Vmax	[V]	250 d.c.
	Imaxww	[A]	5 (resistive load)
	Functions		Alarm, trip, cooling, auto-test
	Programmable functions		Alarm, tip, hold, fan, temp. max
Display			7 segments LED
Connections	Terminals		removable screw
	Max section	[mm²]	2.5
Insulation voltage		[V]	2500/50 Hz - 1 min
Protection degree	Front		IP52
	Rear		IP20
Operation temperature		[°C]	-10...+55, relative humidity max 90%
Storage temperature		[°C]	-25...+80
Reference			IEC EN 50081-2, IEC EN 50082-2, IEC EN 60255

Temperature control units

TMD are used measure and control the temperature levels and efficiency of electric machines, power transformers, motors, etc.
The temperature is measured by four PT100 type sensors. Each measuring channel has two programmable alarm thresholds which trip two output relays to remotely signal that a critical temperature has been reached.
The measured values and any alarm conditions are shown on the dual 3-digit display on the front of the device, which also has five programming keys for configuring its operation.
The control unit is also able to store in memory maximum values and a log of all trip-events.

Temperature measured	**Bbn 8012542**	**Order details**		**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**	**kg**	**pc.**
4	560203	TMD-4/96	2CSG524000R2021	0.8	1

Energy efficiency

Current transformers selection table

Breaker choice*								
Modular	S200, S750DR, S800							
Tmax	XT1, XT2	XT1, XT2, XT3, XT4, XT5		XT5	XT5, XT6		XT6, XT7	XT3, XT4, XT5
Emax						E1.2		
Installation choice								
Fixing system	DIN rail	DIN rail	DIN rail, Cable or Busbar, Base mounted with feet					Busbar

Class	Rated current (A)	**CTA**	**TRF M**	**CT1M-2**	**CT1M-3**	**CT1M-4**	**CT1M-5**	**CT1M-S-30**
0.5	10	2CSG111030R1141 CTA/10						
0.5	20	2CSG111050R1141 CTA/20						
0.5	25	2CSG111060R1141 CTA/25						
0.5	40	2CSG111080R1141 CTA/40 (cl. 0.5)	2CSM100050R1111 TRFM/40					
1	50	2CSG111090R1141 CTA/50 (cl. 0.5)		2CSG280225R1000 CT1M-2 50 (Cl.1)				
1	60	2CSG111100R1141 CTA/60 (cl. 0.5)	2CSM100070R1111 TRFM/60 (cl. 1)	2CSG280235R1000 CT1M-2 60 (Cl.1)				
0.5	80	2CSG111110R1141 CTA/80 (cl. 0.5)		2CSG280245R1000 CT1M-2 80				
1	100	2CSG111120R1141 CTA/100 (cl. 0.5)	2CSM100090R1111 TRFM/100	2CSG280255R1000 CT1M-2 100				2CSG280725R1000 CT1M-S-30 100 (Cl.1)
0.5	150		2CSM100100R1111 TRFM/150	2CSG280265R1000 CT1M-2 150				2CSG280735R1000 CT1M-S-30 150 (Cl.1)
0.5	200			2CSG280275R1000 CT1M-2 200				
0.5	250		2CSM100120R1111 TRFM/250	2CSG280285R1000 CT1M-2 250				2CSG280745R1000 CT1M-S-30 250 (Cl.1)
0.5	300			2CSG280295R1000 CT1M-2 300	2CSG280315R1000 CT1M-3 300	2CSG280375R1000 CT1M-4 300		
0.5	400		2CSM100140R1111 TRFM/400	2CSG280305R1000 CT1M-2 400	2CSG280325R1000 CT1M-3 400	2CSG280385R1000 CT1M-4 400		2CSG280755R1000 CT1M-S-30 400
0.5	500				2CSG280335R1000 CT1M-3 500	2CSG280395R1000 CT1M-4 500		
0.5	600		2CSM100160R1111 TRFM/600		2CSG280345R1000 CT1M-3 600	2CSG280405R1000 CT1M-4 600		
0.5	800					2CSG280355R1000 CT1M-4 800		
0.5	1000						2CSG280365-R1000 CT1M-5 1000	

*Breaker choice recommendations are only indicative. For precise information, please refer to the related product catalogs.

XT5, XT6, XT7	XT5, XT6, XT7	XT5, XT6, XT7				XT6, XT7
E1.2, E2.2		E2.2	E2.2, E4.2, E6.2			
DIN rail, Cable or Busbar, Base mounted with feet	Busbar	Cable or Busbar, Base mounted with feet				Busbar
CT1M-6	**CT1M-7**	**CT1M-S-80**	**CT1M-8**	**CT1M-10**	**CT1M-12**	**CT1M-S-120**
2CSG280415R1000 CT1M-6 250	2CSG280765R1000 CT1M-S-80 250					
2CSG280425R1000 CT1M-6 300						
2CSG280435R1000 CT1M-6 400	2CSG280775R1000 CT1M-S-80 400					
2CSG280445R1000 CT1M-6 500	2CSG280785R1000 CT1M-S-80 500					
2CSG280455R1000 CT1M-6 600	2CSG280795R1000 CT1M-S-80 600	2CSG280525R1000 CT1M-8 600	2CSG280605R1000 CT1M-10 600			
2CSG280465R1000 CT1M-6 800	2CSG280805R1000 CT1M-S-80 800	2CSG280535R1000 CT1M-8 800	2CSG280615R1000 CT1M-10 800			2CSG280825R1000 CT1M-S-120 800
2CSG280475R1000 CT1M-6 1000	2CSG280815R1000 CT1M-S-80 1000	2CSG280545R1000 CT1M-8 1000	2CSG280625R1000 CT1M-10 1000			

Energy efficiency

Current Transformers selection table

Breaker choice*							
Modular	S200, S750DR, S800						
Tmax	XT1, XT2	XT1, XT2, XT3, XT4, XT5	XT5	XT5, XT6	XT6, XT7	XT3, XT4, XT5	
Emax				E1.2			
Installation choice							
Fixing system	DIN rail	DIN rail	DIN rail, Cable or Busbar, Base mounted with feet			Busbar	

Class	Rated current (A)	**CTA**	**TRF M**	**CT1M-2**	**CT1M-3**	**CT1M-4**	**CT1M-5**	**CT1M-S-30**
0.5	1200							
05	1250							
0.5	1500							
0.5	2000							
0.5	2500							
0.5	3000							
0.5	4000							
0.5	5000							
0.5	6000							

	CTA	**TRF M**	**CT1M-2**	**CT1M-3**	**CT1M-4**	**CT1M-5**	**CT1M-S-30**
	Wound primary	Through primary	Through primary	Through primary	Through primary	Through primary	Split-core through primary
Cable diameter (mm)	8	29	21	26	31	41	–
Horizontal busbar size	–	–	20x10	30x10, 25x15	40x10, 30x20	50x10, 40x20, 30x30	–
Vertical busbar size	–	–	–	–	40x10, 30x20	–	33x23

*Breaker choice recommendations are only indicative. For precise information, please refer to the related product catalogs.

XT5, XT6, XT7	XT5, XT6, XT7	XT5, XT6, XT7				XT6, XT7
E1.2, E2.2		E2.2	E2.2, E4.2, E6.2			
DIN rail, Cable or Busbar, Base mounted with feet	Busbar	Cable or Busbar, Base mounted with feet				Busbar

CT1M-6	**CT1M-7**	**CT1M-S-80**	**CT1M-8**	**CT1M-10**	**CT1M-12**	**CT1M-S-120**
2CSG280485R1000 CT1M-6 1200			2CSG280555R1000 CT1M-8 1200	2CSG280635R1000 CT1M-10 1200		2CSG280835R1000 CT1M-S-120 1200
				2CSG280705R1000 CT1M-10 1250		
2CSG280495R1000 CT1M-6 1500			2CSG280565R1000 CT1M-8 1500	2CSG280645R1000 CT1M-10 1500		2CSG280845R1000 CT1M-S-120 1500
2CSG280505R1000 CT1M-6 2000			2CSG280575R1000 CT1M-8 2000	2CSG280655R1000 CT1M-10 2000		
	2CSG280515R1000 CT1M-7 2500			2CSG280585R1000 CT1M-10 2500		
				2CSG280595R1000 CT1M-10 3000	2CSG280665R1000 CT1M-12 3000	
				2CSG280715R1000 CT1M-10 4000	2CSG280675R1000 CT1M-12 4000	
					2CSG280685R1000 CT1M-12 5000	
					2CSG280695R1000 CT1M-12 6000	

CT1M-6	**CT1M-7**	**CT1M-S-80**	**CT1M-8**	**CT1M-10**	**CT1M-12**	**CT120**
Through primary	Through primary	Split-core through primary	Through primary	–	Through primary	Split-core through primary
65	–	–	73	86	–	–
80x10, 60x30, 50x50	101x56	–	80x30,60x50	100x30, 80x50, 70x60	125x93	–
80x10, 60x30, 50x50	–	85x55	80x30,60x50	100x30, 80x50, 70x60	–	125x85

Energy efficiency

CT1M Current Transformers

CT1M

Technical features					
		CTA	**TRFM**	**CT1M Solid Core**	**CT1M-S Split Core**
Standard secondary current	[In]	5 A	5 A	5 A	5 A
Max. voltage for operation	[kV]	1.2	1.2	0.72	0.72
Test voltage	[kV]	3 kV at 50 Hz/1min	3 kV at 50 Hz/1min	4 kV at 50Hz / 1 min (CT1M-3: 3kV at 50Hz / 1 min)	
Short circuit rated thermal current	[Ith]	40 x In	40 x In	60 x In	60 x In
Short circuit rated dynamic current	[Idyn]	2.5 x Ith	2.5 x Ith	2.5 x Ith	2.5 x Ith
Permanent overload	[A]	1.2 x In	1.2 x In	1.2 x In	1.2 x In
Safety factor	[Fs]	from ≤ 2 to ≤ 10 depending on the type and capacity	from ≤ 2 to ≤ 10 depending on the type and capacity	from ≤ 5 to ≤ 15 depending on the type and capacity	from ≤ 10 to ≤ 30 depending on the type and capacity
Frequency	[Hz]	50-60	50-60	50-60	50-60
Terminals		primary P1 - P2 (K - L); secondary s1 - s2 (k - l)			
		P1 (K) primary winding input			
		s1 (k) secondary winding input			
		P2 (L) primary winding output			
		s2 (l) secondary winding output			
Housing		Self-extinguishing thermoplastic resin V0	Self-extinguishing thermoplastic resin V0	UL94V-0	UL94V-0
Insulation class		Class E	Class E	Class E	Class E
Protection degree		IP20	IP20	IP20	IP20
Operating temperature	[°C]	-5°C to +50°C	-25°C to +50°C	-25°C to +40°C	-25°C to +40°C
Storage temperature	[°C]	70°C	-40°C...+80°C	-50°C to +80°C	-50°C to +80°C
Reference standard		IEC EN 60044-1	IEC EN 60044-1	IEC 61869-2	IEC 61869-2

Energy efficiency

CT1M Current Transformers

Overall dimensions			
Product Range	**A** **Width (mm)**	**B** **Height (mm)**	**C** **Length (mm)**
CT1M-2	45	65	40
CT1M-3	50	70	31
CT1M-4	62	78	40
CT1M-5	74	98	45
CT1M-6	104	126	45
CT1M-7	130	170	51
CT1M-8	140	155	45
CT1M-10	140	155	45
CT1M-12	225	206	50
CT1M-S-30	93	106	40
CT1M-S-80	125	158	40
CT1M-S-120	155	198	40

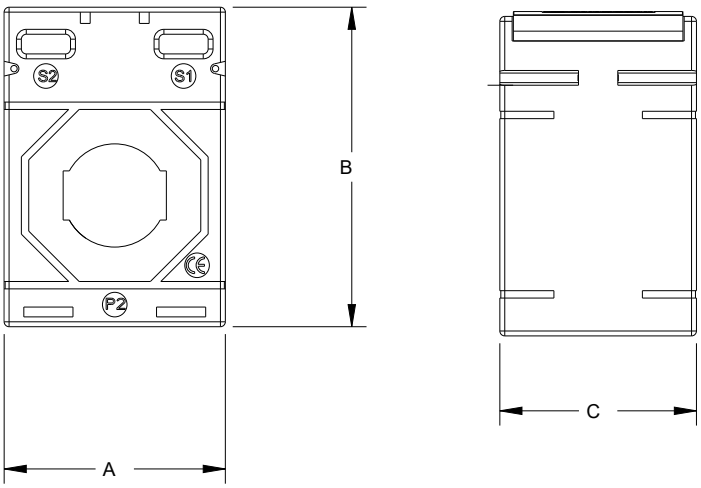

Energy efficiency

CT1M Current Transformers

CT1M-2

CT1M-2 .../5 A series, through primary									
Primary rated current (A)	Best Accuracy class	VA - Class 0.5	VA - Class 1	VA - Class 3	Bbn 8012542	Order details		Weight 1 piece	Pack unit
					EAN	Type code	Order code	kg	pc.
50	1	-	1.5VA	2VA	802259	CT1M-2 50	2CSG280225R1000	0,35	1
60	1	-	1.5VA	2VA	802358	CT1M-2 60	2CSG280235R1000	0,36	1
80	0.5	1VA	2.5VA	3VA	802457	CT1M-2 80	2CSG280245R1000	0,36	1
100	0.5	1.5VA	3.75VA	3.75VA	802556	CT1M-2 100	2CSG280255R1000	0,34	1
150	0.5	2.5VA	5 VA	5VA	802655	CT1M-2 150	2CSG280265R1000	0,35	1
200	0.5	3.75VA	5 VA	5VA	802754	CT1M-2 200	2CSG280275R1000	0,35	1
250	0.5	5VA	5 VA	7.5VA	802853	CT1M-2 250	2CSG280285R1000	0,36	1
300	0.5	5VA	5 VA	7.5VA	802952	CT1M-2 300	2CSG280295R1000	0,31	1
400	0.5	5VA	5VA	7.5VA	803058	CT1M-2 400	2CSG280305R1000	0,33	1

- Busbar and Mounting feet fixings are supplied as standard
- DIN Rail Mounting Adapter available as an option
- Suitable adapter is CT1M-2 DIN Rail Adapter

CT1M-2 Series

Through primary		max section [mm]
Cable	◯	21
Horizontal bar	▭	20x10
Vertical bar	▯	-

CT1M-3

CT1M-3 .../5 A series, through primary									
Primary rated current (A)	Best Accuracy class	VA - Class 0.5	VA - Class 1	VA - Class 3	Bbn 8012542	Order details		Weight 1 piece	Pack unit
					EAN	Type code	Order code	kg	pc.
300	0.5	5VA	5VA	6.25VA	803157	CT1M-3 300	2CSG280315R1000	0,32	1
400	0.5	5VA	6.25VA	6.25VA	803256	CT1M-3 400	2CSG280325R1000	0,32	1
500	0.5	5VA	6.25VA	7.5VA	803355	CT1M-3 500	2CSG280335R1000	0,33	1
600	0.5	5VA	7.5VA	10VA	803454	CT1M-3 600	2CSG280345R1000	0,35	1

- Busbar and Mounting feet fixings are supplied as standard.
- DIN Rail Mounting Adapter available as an option
- Suitable adapter is CT1M-3 DIN Rail Adapter

CT1M-3 Series

Through primary		max section [mm]
Cable	◯	26
Horizontal bar	▭	30x10, 25x15
Vertical bar	▯	-

CT1M DIN Rail Adapters

CT1M DIN Rail Adapters				
Bbn 8012542	Order details		Weight 1 piece	Pack unit
EAN	Type code	Order code	kg	pc.
830955	CT1M-2 DIN Rail Adapter	2CSG428309R1000	0,05	1
831051	CT1M-3 DIN Rail Adapter	2CSG428310R1000	0,05	1
831150	CT1M-4/5/6/7 DIN Rail Adapter	2CSG428311R1000	0,05	1

Energy efficiency

CT1M Current Transformers

CT1M-4

CT1M-5

CT1M-4 & CT1M-5 .../5 A series, through primary

Primary rated current (A)	Best Accuracy class	VA - Class 0.5	VA - Class 1	VA - Class 3	Bbn 8012542	Order details		Weight 1 piece	Pack unit
					EAN	Type code	Order code	kg	pc.
300	0.5	5VA	5VA	5VA	803751	CT1M-4 300	2CSG280375R1000	0,41	1
400	0.5	5VA	5VA	7.5VA	803850	CT1M-4 400	2CSG280385R1000	0,42	1
500	0.5	5VA	7.5VA	10VA	803959	CT1M-4 500	2CSG280395R1000	0,45	1
600	0.5	7.5VA	10VA	12.5VA	804055	CT1M-4 600	2CSG280405R1000	0,47	1
800	0.5	10VA	10VA	12.5VA	803553	CT1M-4 800	2CSG280355R1000	0,48	1
1000	0.5	12.5VA	15VA	20VA	803652	CT1M-5 1000	2CSG280365R1000	0,67	1

- Busbar and Mounting feet fixings are supplied as standard.
- DIN Rail Mounting Adapter available as an option. Suitable adapter is CT1M-4/5/6/7 DIN Rail Adapter.

CT1M-4 Series

Through primary		max section [mm]
Cable	◯	31
Horizontal bar	▭	40x10, 30x20
Vertical bar	▯	40x10, 30x20

CT1M-5 Series

Through primary		max section [mm]
Cable	◯	41
Horizontal bar	▭	50X10, 40X20, 30X30
Vertical bar	▯	-

CT1M-6

CT1M-7

CT1M-6 & CT1M-7 .../5 A series, through primary

Primary rated current (A)	Best Accuracy class	VA - Class 0.5	VA - Class 1	VA - Class 3	Bbn 8012542	Order details		Weight 1 piece	Pack unit
					EAN	Type code	Order code	kg	pc.
250	0.5	1.5VA	2.5VA	3.75VA	804154	CT1M-6 250	2CSG280415R1000	0,66	1
300	0.5	2.5VA	7.5VA	7.5VA	804253	CT1M-6 300	2CSG280425R1000	0,67	1
400	0.5	7.5VA	10VA	10VA	804352	CT1M-6 400	2CSG280435R1000	0,64	1
500	0.5	10VA	10VA	10VA	804451	CT1M-6 500	2CSG280445R1000	0,66	1
600	0.5	10VA	12.5VA	12.5VA	804550	CT1M-6 600	2CSG280455R1000	0,68	1
800	0.5	15VA	15VA	15VA	804659	CT1M-6 800	2CSG280465R1000	0,73	1
1000	0.5	20VA	30VA	20VA	804758	CT1M-6 1000	2CSG280475R1000	0,78	1
1200	0.5	20VA	30VA	30VA	804857	CT1M-6 1200	2CSG280485R1000	0,83	1
1500	0.5	20VA	30VA	30VA	804956	CT1M-6 1500	2CSG280495R1000	0,80	1
2000	0.5	20VA	30VA	35VA	805052	CT1M-6 2000	2CSG280505R1000	0,90	1
2500	0.5	15VA	15VA	15VA	805151	CT1M-7 2500	2CSG280515R1000	1,42	1

- Busbar and Mounting feet fixings are supplied as standard.
- DIN Rail Mounting Adapter available as an option. Suitable adapter is CT1M-4/5/6/7 DIN Rail Adapter.

CT1M-6 Series

Through primary		max section [mm]
Cable	◯	65
Horizontal bar	▭	80x10, 60x30, 50x50
Vertical bar	▯	80x10, 60x30, 50x50

CT1M-7 Series

Through primary		max section [mm]
Cable	◯	-
Horizontal bar	▭	101x56
Vertical bar	▯	-

Energy efficiency

CT1M Current Transformers

CT1M-8

CT1M-8 .../5 A series, through primary

Primary rated current (A)	Best Accuracy class	VA - Class 0.5	VA - Class 1	VA - Class 3	Bbn 8012542	Order details		Weight 1 piece	Pack unit
					EAN	Type code	Order code	kg	pc.
600	0.5	15VA	30VA	35VA	805250	CT1M-8 600	2CSG280525R1000	1,34	1
800	0.5	15VA	45VA	50VA	805359	CT1M-8 800	2CSG280535R1000	1,39	1
1000	0.5	30VA	60VA	60VA	805458	CT1M-8 1000	2CSG280545R1000	1,45	1
1200	0.5	30VA	60VA	60VA	805557	CT1M-8 1200	2CSG280555R1000	1,31	1
1500	0.5	60VA	60VA	60VA	805656	CT1M-8 1500	2CSG280565R1000	1,18	1
2000	0.5	60VA	60VA	60VA	805755	CT1M-8 2000	2CSG280575R1000	1,29	1

- Busbar and Mounting feet fixings are supplied as standard.

CT1M-8 Series

Through primary		max section [mm]
Cable	◯	73
Horizontal bar	▭	80x30, 60x50
Vertical bar	▯	80x30, 60x50

CT1M-10

CT1M-10 .../5 A series, through primary

Primary rated current (A)	Best Accuracy class	VA - Class 0.5	VA - Class 1	VA - Class 3	Bbn 8012542	Order details		Weight 1 piece	Pack unit
					EAN	Type code	Order code	kg	pc.
600	0.5	10VA	15VA	15VA	806059	CT1M-10 600	2CSG280605R1000	0,92	1
800	0.5	15VA	20VA	25VA	806158	CT1M-10 800	2CSG280615R1000	0,97	1
1000	0.5	15VA	20VA	25VA	806257	CT1M-10 1000	2CSG280625R1000	1,01	1
1200	0.5	15VA	30VA	30VA	806356	CT1M-10 1200	2CSG280635R1000	1,06	1
1250	0.5	15VA	30VA	35VA	807056	CT1M-10 1250	2CSG280705R1000	1,08	1
1500	0.5	20VA	30VA	40VA	806455	CT1M-10 1500	2CSG280645R1000	1,14	1
2000	0.5	45VA	45VA	45VA	806554	CT1M-10 2000	2CSG280655R1000	1,11	1
2500	0.5	45VA	45VA	45VA	805854	CT1M-10 2500	2CSG280585R1000	1,05	1
3000	0.5	60VA	60VA	60VA	805953	CT1M-10 3000	2CSG280595R1000	1,14	1
4000	0.5	60VA	60VA	60VA	807155	CT1M-10 4000	2CSG280715R1000	1,33	1

- Busbar and Mounting feet fixings are supplied as standard.

CT1M-10 Series

Through primary		max section [mm]
Cable	◯	86
Horizontal bar	▭	100x30, 80x50, 70x60
Vertical bar	▯	100x30, 80x50, 70x60

CT1M-12

CT1M-12 .../5 A series, through primary

Primary rated current (A)	Best Accuracy class	VA - Class 0.5	VA - Class 1	VA - Class 3	Bbn 8012542	Order details		Weight 1 piece	Pack unit
					EAN	Type code	Order code	kg	pc.
3000	0.5	30VA	60VA	60VA	806653	CT1M-12 3000	2CSG280665R1000	2,04	1
4000	0.5	45VA	60VA	60VA	806752	CT1M-12 4000	2CSG280675R1000	2,27	1
5000	0.5	100VA	100VA	100VA	806851	CT1M-12 5000	2CSG280685R1000	1,49	1
6000	0.5	100VA	100VA	100VA	806950	CT1M-12 6000	2CSG280695R1000	1,52	1

- Busbar and Mounting feet fixings are supplied as standard.

CT1M-12 Series

Through primary		max section [mm]
Cable	◯	-
Horizontal bar	▭	125x93
Vertical bar	▯	-

Energy efficiency

CT1M Current Transformers

CT1M-S-30

CT1M-S-30 .../5 A series, through primary

Primary rated current (A)	Best Accuracy class	VA - Class 0.5	VA - Class 1	VA - Class 3	Bbn 8012542	Order details		Weight 1 piece	Pack unit
					EAN	Type code	Order code	kg	pc.
100	1	-	1.5VA	3.5VA	807254	CT1M-S-30 100	2CSG280725R1000	0,83	1
150	1	-	1.75VA	3.75VA	807353	CT1M-S-30 150	2CSG280735R1000	0,84	1
250	1	-	3.75VA	6.25VA	807452	CT1M-S-30 250	2CSG280745R1000	0,86	1
400	0.5	3.75VA	6.25VA	10VA	807551	CT1M-S-30 400	2CSG280755R1000	0,89	1

CT1M-S-80

CT1M-S-80 .../5 A series, through primary

Primary rated current (A)	Best Accuracy class	VA - Class 0.5	VA - Class 1	VA - Class 3	Bbn 8012542	Order details		Weight 1 piece	Pack unit
					EAN	Type code	Order code	kg	pc.
250	0.5	1VA	2.5VA	3.75VA	807650	CT1M-S-80 250	2CSG280765R1000	1,24	1
400	0.5	2.5VA	3.75VA	5VA	807759	CT1M-S-80 400	2CSG280775R1000	1,27	1
500	0.5	3.75VA	5VA	7.5VA	807858	CT1M-S-80 500	2CSG280785R1000	1,30	1
600	0.5	5VA	7.5VA	10VA	807957	CT1M-S-80 600	2CSG280795R1000	1,32	1
800	0.5	7.5VA	10VA	12.5VA	808053	CT1M-S-80 800	2CSG280805R1000	1,37	1
1000	0.5	10VA	15VA	20VA	808152	CT1M-S-80 1000	2CSG280815R1000	1,42	1

CT1M-S-120

CT1M-S-120 .../5 A series, through primary

Primary rated current (A)	Best Accuracy class	VA - Class 0.5	VA - Class 1	VA - Class 3	Bbn 8012542	Order details		Weight 1 piece	Pack unit
					EAN	Type code	Order code	kg	pc.
800	0.5	7.5VA	10VA	12.5VA	808251	CT1M-S-120 800	2CSG280825R1000	1,65	1
1200	0.5	15VA	30VA	45VA	808350	CT1M-S-120 1200	2CSG280835R1000	1,75	1
1500	0.5	20VA	45VA	60VA	808459	CT1M-S-120 1500	2CSG280845R1000	1,83	1

CT1M-S-30 Series

Through primary		max section [mm]
Cable	◯	-
Horizontal bar	▭	-
Vertical bar	▯	33x23

CT1M-S-80 Series

Through primary		max section [mm]
Cable	◯	-
Horizontal bar	▭	-
Vertical bar	▯	85x55

CT1M-S-120 Series

Through primary		max section [mm]
Cable	◯	-
Horizontal bar	▭	-
Vertical bar	▯	125x85

Energy efficiency

CTA current transformers & TRF M modular current transformers

CTA/25

Standard type current transformers .../5 A with wound primary

CTA .../5 A series, wound primary with insertion on Ø8 MA bolt							
Primary rated current Iprim	**Accuracy class**	**Rated power**	**Bbn 8012542**	**Order details**		**Weight 1 piece**	**Pack unit**
A		**VA**	**EAN**	**Type code**	**Order code**	**kg**	**pc.**
10	0.5	5	661405	CTA/10	2CSG111030R1141	0.290	1
20	0.5	5	661603	CTA/20	2CSG111050R1141	0.290	1
25	0.5	5	661702	CTA/25	2CSG111060R1141	0.290	1
40	0.5	5	661801	CTA/40	2CSG111080R1141	0.290	1
50	0.5	5	661900	CTA/50	2CSG111090R1141	0.290	1
60	0.5	5	662006	CTA/60	2CSG111100R1141	0.290	1
80	0.5	5	662105	CTA/80	2CSG111110R1141	0.290	1
100	0.5	5	662204	CTA/100	2CSG111120R1141	0.290	1

CTA series

Wound primary		max section [mm]
Cable	◯	8
Horizontal bar	▭	-
Vertical bar	▯	-

TRF M

Modular current transformers with Ø 29 mm through primary, secondary .../5A

TRF M are modular current transformers with through primary for measuring instruments. Their compact size and quick DIN rail plug allow easy installation along with great measurement precision.

Primary rated current Iprim	**Accuracy class**	**Rated power**	**Bbn 8012542**	**Order details**		**Weight 1 piece**	**Pack unit**
A		**VA**	**EAN**	**Type code**	**Order code**	**kg**	**pc.**
40	3	1	046912	TRFM/40	2CSM100050R1111	0.250	1
60	1	2	047018	TRFM/60	2CSM100070R1111	0.250	1
100	0.5	2	047117	TRFM/100	2CSM100090R1111	0.250	1
150	0.5	3	047216	TRFM/150	2CSM100100R1111	0.250	1
250	0.5	4	047315	TRFM/250	2CSM100120R1111	0.250	1
400	0.5	6	047407	TRFM/400	2CSM100140R1111	0.250	1
600	0.5	8	047506	TRFM/600	2CSM100160R1111	0.250	1

Energy efficiency

CT Current Transformers – Questions & answers

Can the incorrect installation of current transformers affect the measurement of the connected devices?

Certainly! Reversal of the connections to the secondary terminals or the wrong insertion of the primary cable can cause an incorrect measurement readings from the instrument.

If one of the above situations occurs, the instrument measures a secondary current on its terminals that flows in the opposite direction of what actually happens. This can lead to different consequences depending on how the firmware of the measuring device has been designed. A wrong connection in unidirectional instruments (reading on 2 quadrants) may be signaled by an error message.

On the other hand, it may not be signaled but cause an incorrect count of the instrument, or lead to the interruption of the measurement process. In bidirectional instruments (reading on 4 quadrants), this situation causes the imported power to be read as exported power and vice versa.

Is it necessary to earth the secondary terminals of the current transformers?

Earthing the secondary terminals of current transformers provides a reference towards earth in case of transformer failure, and prevents dangers for persons or risks of damage for the device installed in the switchboard. This does not affect the measurements made by ABB instruments, thus, when the wiring is being made, it is always recommended to comply with the indications in the instruction manual provided along with the measurement devices.

In practical terms, how does the accurary of an energy meter and the respective current transformer affect the measuring chain, energy saving and efficiency evaluations?

To achieve Smart Metering, it is particularly important to know the accuracy class of an instrument in order to assess whether the accuracy of the measurement can be considered satisfactory. The importance of that can be understood analysing the practical example below.

Consider an installation with an average 100kW of energy consumption working 2,000 hours per year. To evaluate the accuracy of a metering unit composed by network analyser or energy meter, and current transformers, the propagation of error and its incidence on the final measure can be calculated with the following formula:

$$\varepsilon_E = \sqrt[2]{\varepsilon_c^{\,2} + \varepsilon_{ct}^{\,2}}$$

Where:

ε_E = percentage error of the energy measured

ε_c = percentage error of the energy meter

ε_{ct} = percentage error of the current transformer

The following table shows how the variation in the accuracy class of the measuring device and the associated current transformers affects the overall accuracy of the system.

	Example 1	**Example 2**	**Example 3**
ε_{ct}	0.5 %	1 %	2 %
ε_c	0.5 %	1 %	2 %
ε_E	0.71 %	1.41 %	2.83 %
Annual consumption measured with error	201.420 kWh	202.820 kWh	205.650 kWh
Overall cost of energy	0.18 €/kWh	0.18 €/kWh	0.18 €/kWh
Overall expense	36.256 €	36.507 €	37.017 €

The choice of an instrument with a higher degree of accuracy results in a measurement that is more accurate and with less chance of errors when consumption is assessed. The beneficial effect is that the more the error decreases the less will be the cost of energy.

SMISSLINE TP PLUG-IN SYSTEM

Electrical installation solutions for buildings
SMISSLINE TP plug-in system

Index

MCB S 400 E	8
MCBs S 400 M	12
MCBs S 400 M-UC	24
MCBs S400 P	25
MCBs SUP 400	32
RCBOs FS401	46
RCBOs FS401 type F	48
RCBOs FS403	49
RCBO FS402	52
Surge arrester	55
Switch disconnector	58
Auxiliary elements and accessories	59
Dummy housing, Neutral disconnector, shunt trip	62
Auxiliary and signal contacts for UL applications	63
Busbar system 125A	65
Combi modules adapter for manual motor starter and DIN adapters	82
Busbar system 250A	90
Busbar system direct feed	100

SMISSLINE TP plug-in system

Busbar system 250A - Pan Assembly solution	103
Introduction	111

SMISSLINE TP interior expansion with CombiLine

Options for assembly in an enclosure	114
For horizontal and vertical device arrangement	115

Plug-in system

Cable laying grids, DIN rails, fixing brackets	117
Cover holders, panel connectors, raising frames	118
Plastic cover horizontal	119
Plastic cover vertical	120

Planning aid

Comparison of starting package with plug-in socket in individual parts	121
Starter kit or socket base in individual parts Assignment of CombiLine modules	122

SMISSLINE TP plug-in system
Changes are never been easier

SMISSLINE TP ensures that load-free devices and components can be snapped on and off under voltage without the need for additional personal protective equipment to guard against electrical hazards.

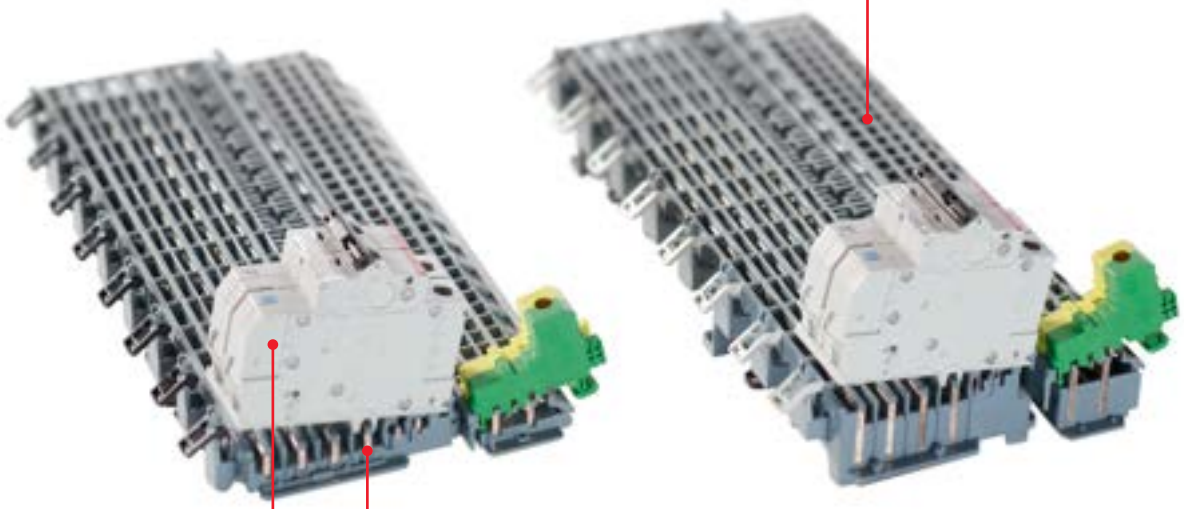

It opens up to a completely new prospects for you when it comes to installation, operation and flexibility.

The world's first pluggable socket system. 125Asystem and the 250A Power Bar system.

SMISSLINE TP plug-in system
Changes are never been easyer

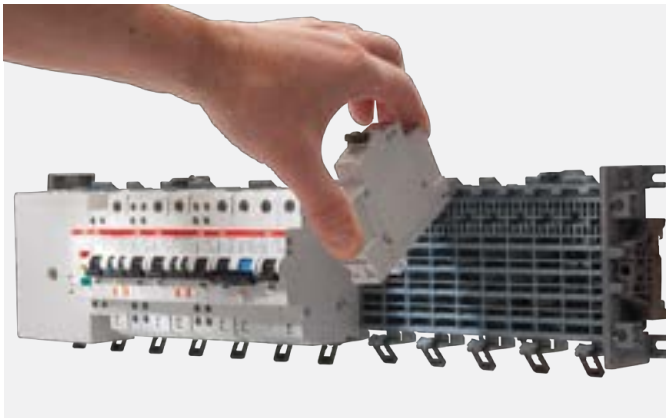

Even safer: Protection against electrical hazards
We have upgraded our unique SMISSLINE socket system even further through the addition of a pioneering innovation. With the new SMISSLINE TP system, components can now be plugged in or unplugged load-free without any risk from electrical current running through the body.

The SMISSLINE TP pluggable socket system is completely finger-safe (IP2XB) – when devices are plugged in and unplugged, the system is always touch-proof. This means that SMISSLINE TP prevents any danger to personnel from switching arcs or accidental arcing.

Even more flexible: make additions and changes during on-going operation
Pluggable devices can be added and changed quickly, safely and simply during ongoing operation. And this can be done without any need for personal protective equipment.

This means that you benefit from more flexibility, savings on installation and maintenance – and improved safety. SMISSLINE TP provides greater availability and operating safety than conventional systems.

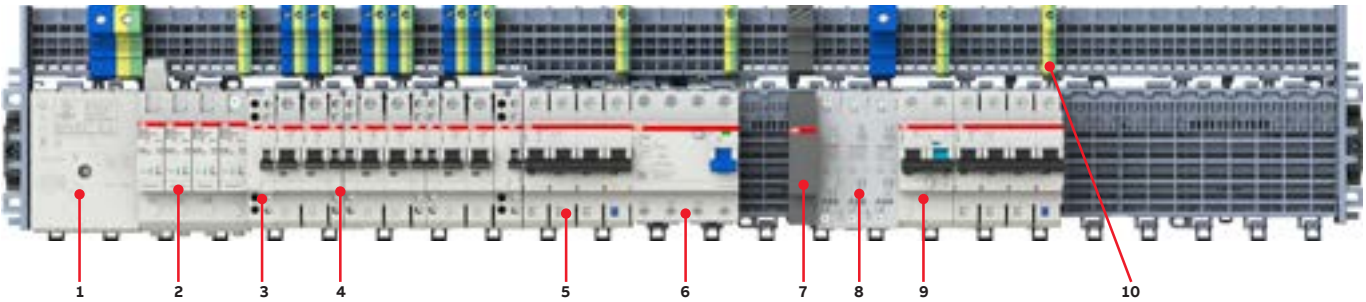

1 Incoming block 125/160 A
2 Surge arrester
3 Auxiliary switch
4 Miniature circuit breaker (MCB) 1 pole
5 Miniature circuit breaker (MCB) 4 pole
6 4-poles Residual current operated circuit breaker RCCBs
7 Busbar insulator
8 Incoming block 63 A
9 2-pole Residual current operated circuit breaker (RCBO)
10 N terminals and PE terminals

Power behind bars
The world’s safest socket system

Small cause, large effect: as the world’s first pluggable socket system, SMISSLINE TP ensures that load-free devices and components can be snapped on and off under voltage without the need for additional personal protective equipment to guard against electrical hazards. That opens up completely new prospects for you when it comes to installation, operation and flexibility.

When working under load please follow the applicable regulations and laws according to the country. Due to possible changes in provisions, materials and dimensions are the properties contained in this catalogue only after confirmation by ABB to be considered binding.

SMISSLINE TP
System overview

125A Busbar System
125A rated current side feeding socket system with integrated busbars for
L1, L2, L3, N and 2 busbars for signalization.
Additional socket with N and PE busbars.

- EC/EN 61439-6 and UL508
- Rated conditional short-circuit current (Icc) with XT4 100 kA (415V)

250A Busbar System
250A rated current side feeding socket system with integrated busbars for
L1, L2, L3, N and 2 busbars for signalization.
Additional socket with N and PE busbars.

- EC/EN 61439-6 and UL508 (UL only main socket)
- Rated conditional short-circuit current (Icc) with XT4 100 kA (415V)

250A Direct Feed System
Top or bottom feed solution. The direct feed solution allows a direct connection to a plug-in circuit-breaker Tmax XT4 Moulded Case Circuit Breaker with one 250A busbar system.

- EC/EN 61439-6 and UL508 (UL only main socket)
- Rated conditional short-circuit current (Icc) with XT4 100 kA (415V)

Top or bottom feed solution.
The Pan Assembly solution allows a direct connection to a plug-in circuit-breaker Tmax XT4 Moulded Case Circuit Breaker with two 250A busbar system.

SMISSLINE:
Online Configurator Software tool

SMISSLINE Designer Software online Version

- The plug-in SMISSLINE TP system main strengths are wherever rapid replacement, simple expansion capabilities, a mixed-polarity layout or a high level of standardization is required.
- The new online Design Software tool is supporting the configuration for the SMISSLINE busbar system including all the range of products on the system. It is helping an easy planning and managing a project. The Software support commercial and technical information's.
- After design a project with one or numerous busbar rows for the 125A, 250A or direct feed system, the data can be export. Exports are possible for part list, Tender text or for some technical information like the current flow list.

https://app.smissline.abb/

Miniature circuit breaker (MCB)
Electrical installation solutions for buildings

New, patented bidirectional terminal with captive screws for maximum comfort, safety and flexibility.
The connection takes place in two chambers (35 mm^2 and 6 mm^2).
Two conductors with the same cross-section can be connected in each chamber

Reliable recognition of the switching status through the new red/green position indicating device that shows the position of the inner contacts

Laser printing for scratch- and solvent-resistant identification marking

Tripping characteristics B, C.
Rated breaking capacity of 6 kA to IEC/EN 60898-1

Pole conductor indicator changes when the contact is moved to the rear of the device

Miniature circuit breaker (MCB) for IEC

S400E technical features

				S400E
General Data	Standards			IEC/EN 60898-1
	Number of poles			1P, 1P+NP, 2P, 3P, 3P+NP
	Tripping characteristics			B, C
	Rated Current I_n		A	6… 63 A
	Rated frequency f		Hz	50 / 60 Hz
	Rated Insulation voltage Ui acc. to IEC/EN 60664-1		V	440 V AC
	Overvoltage category			III
	Pollution degree			3
Data acc. to IEC/EN 60898-1 (except S 200 M UC data acc. to IEC/EN 60898-2)	Rated voltage U_n		V	1P: 230/400 V AC 1P+NP: AC 230 V AC 2P, 3P, 3P+NP: 400 V AC
	Max. power frequency recovery voltage (U_{max})		V	
	Min. operating voltage		V	12 V AC
	Rated short-circuit capacity I_{cn}		kA	6 kA
	Energy limiting class			3
	Grid distance		mm	35
	Rated impulse withstand voltage U_{imp}. (1.2 / 50 µs)		kV	4 kV
	Dielectric test voltage		kV	2 kV (1 min)
	Reference temperature for tripping characteristics		°C	30°C
	Electrical endurance		cycles (OFF-ON-OFF)	10 000 ops
Mechanical data	Housing			Insulation group I, light grey
	Toggle			Insulation group II, black, sealable
	Mechanical endurance		cycles (OFF-ON-OFF)	20 000 ops
	Contact position indication (CPI)			green OFF / red ON
	Protecion degree acc. to EN 60529			IP20, IP40 in enclosure with cover
	Shock resistance acc. to IEC/EN 61373			Category 1, Class B
	Shock resistance acc. to IEC/EN 60068-2-27 (Test Ea)			5 g / 30 ms
	Vibration resistance acc. to IEC/EN 60068-2-6 (Test Fc)			5…13.2 Hz / 1 mm 13.2 …100 Hz / 0.7 g with load 80% x Ie
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C / RH	28 cycles with 55 °C / 90…96% and 25 °C / 95…100%
	Ambient temperature		°C	-40 … +70°C
	Storage temperature		°C	-40 … +70°C
Installation	Terminal type			Failsafe bi-directional cylinder-lift terminal (shock protected) with double slot 35/10 mm2
	Cross-section of conductors (top/bottom)	Solid/ Stranded	mm²	Single: 0.75 … 35 mm² (front slot), 0.75 … 6 mm² (rear slot) Multiple: 2 x 0.75 … 10 mm² (front slot), 2 x 0.75 … 6 mm² (rear slot), with cables of same type and size
		Flexible	mm²	Single: 0.75 … 25 mm² (front side), 0.75 … 6 mm² (rear slot) Multiple: 2 x 0.75 … 10 mm² (front slot), 2 x 0.75 … 6 mm² (rear slot), with cables of same type and size
			AWG	
	Cross-section of busbars (top/bottom)		mm²	
			AWG	
	Tightening torque		Nm	2.8 Nm
			in-lbs	
	Wire stripping length		mm	12.5 mm
	Screwdriver			No. 2 Pozidrive
	Mounting			SMISSLINE TP busbars system only
	Mounting position			Any
	Supply			Any
Dimensions and weight	Mounting dimensions acc. to DIN 43880			
	Pole dimensions (H x D x W)		mm	91 x 18 x 82mm
	Pole weight		g	Approx. 115 g
Combination with auxiliary elements	Auxiliary contact			Yes
	Auxiliary/Signal contact			Yes
	Bottom fitting auxiliary contact			No
	Shunt trip			Yes
	Undervoltage release			No
	Overvoltage release			No
	Motor Operating Device			No
	Autoreclosing Unit			No

Miniature circuit breaker (MCB) for IEC

S400E series 6000 B characteristic

S400E Characteristic B
Function: protection and control of the circuits against overloads and short-circuits; protection for people and big length cables in TN and IT systems.
Applications: residential, commercial and industrial.
Standard: IEC/EN 60898
Icn =6 kA

	I_{cn} [kA]	I_n [A]	Type name	ABB IT number	EAN number 761227	Pack-aging unit	Module	Weight in kg
S401E	6	6	S401E-B6	2CCS551001R0065	0101009	10	1	0.11
	6	8	S401E-B8	2CCS551001R0085	0108442	10	1	0.11
	6	10	S401E-B10	2CCS551001R0105	0101016	10	1	0.11
	6	13	S401E-B13	2CCS551001R0135	0101023	10	1	0.11
	6	16	S401E-B16	2CCS551001R0165	0101030	10	1	0.11
	6	20	S401E-B20	2CCS551001R0205	0101047	10	1	0.11
	6	25	S401E-B25	2CCS551001R0255	0101054	10	1	0.11
	6	32	S401E-B32	2CCS551001R0325	0101061	10	1	0.11
	6	40	S401E-B40	2CCS551001R0405	0101078	10	1	0.11
	6	50	S401E-B50	2CCS551001R0505	0101085	10	1	0.11
	6	63	S401E-B63	2CCS551001R0635	0101092	10	1	0.11
S402E	6	6	S402E-B6	2CCS552001R0065	0101771	5	2	0.221
	6	8	S402E-B8	2CCS552001R0085	010 8459	5	2	0.221
	6	10	S402E-B10	2CCS552001R0105	0101788	5	2	0.221
	6	13	S402E-B13	2CCS552001R0135	0101795	5	2	0.221
	6	16	S402E-B16	2CCS552001R0165	0101801	5	2	0.221
	6	20	S402E-B20	2CCS552001R0205	0101818	5	2	0.221
	6	25	S402E-B25	2CCS552001R0255	0101825	5	2	0.221
	6	32	S402E-B32	2CCS552001R0325	0101832	5	2	0.221
	6	40	S402E-B40	2CCS552001R0405	0101849	5	2	0.221
	6	50	S402E-B50	2CCS552001R0505	0101856	5	2	0.221
	6	63	S402E-B63	2CCS552001R0635	0101863	5	2	0.221
S403E	6	6	S403E-B6	2CCS553001R0065	0102549	4	3	0.322
	6	8	S403E-B8	2CCS553001R0085	0108466	4	3	0.322
	6	10	S403E-B10	2CCS553001R0105	0102556	4	3	0.322
	6	13	S403E-B13	2CCS553001R0135	0102563	4	3	0.322
	6	16	S403E-B16	2CCS553001R0165	0102570	4	3	0.322
	6	20	S403E-B20	2CCS553001R0205	0102587	4	3	0.322
	6	25	S403E-B25	2CCS553001R0255	0102594	4	3	0.322
	6	32	S403E-B32	2CCS553001R0325	0102600	4	3	0.322
	6	40	S403E-B40	2CCS553001R0405	0102617	4	3	0.322
	6	50	S403E-B50	2CCS553001R0505	0102624	4	3	0.322
	6	63	S403E-B63	2CCS553001R0635	0102631	4	3	0.322

Miniature circuit breaker (MCB) for IEC

MCBs S400E series 6000 C characteristic

S400E Characteristic C
Function: protection and control of the circuits against overloads and short-circuits; protection for people and big length cables in TN and IT systems.
Applications: residential, commercial and industrial.
Standard: IEC/EN 60898
Icn =6 kA

	I_{cn} [kA]	I_n [A]	Type name	ABB IT number	EAN number 761227	Pack-aging unit	Module	Weight in Kg
S401E	6	6	S401E-C6	2CCS551001R0064	0101108	10	1	0.11
	6	8	S401E-C8	2CCS551001R0084	0101115	10	1	0.11
	6	10	S401E-C10	2CCS551001R0104	0101122	10	1	0.11
	6	13	S401E-C13	2CCS551001R0134	0101139	10	1	0.11
	6	16	S401E-C16	2CCS551001R0164	0101146	10	1	0.11
	6	20	S401E-C20	2CCS551001R0204	0101153	10	1	0.11
	6	25	S401E-C25	2CCS551001R0254	0101160	10	1	0.11
	6	32	S401E-C32	2CCS551001R0324	0101177	10	1	0.11
	6	40	S401E-C40	2CCS551001R0404	0101184	10	1	0.11
	6	50	S401E-C50	2CCS551001R0504	0101191	10	1	0.11
	6	63	S401E-C63	2CCS551001R0634	0101207	10	1	0.11
S402E	6	6	S402E-C6	2CCS552001R0064	0101870	5	2	0.221
	6	8	S402E-C8	2CCS552001R0084	0101887	5	2	0.221
	6	10	S402E-C10	2CCS552001R0104	0101894	5	2	0.221
	6	13	S402E-C13	2CCS552001R0134	0101900	5	2	0.221
	6	16	S402E-C16	2CCS552001R0164	0101917	5	2	0.221
	6	20	S402E-C20	2CCS552001R0204	0101924	5	2	0.221
	6	25	S402E-C25	2CCS552001R0254	0101931	5	2	0.221
	6	32	S402E-C32	2CCS552001R0324	0101948	5	2	0.221
	6	40	S402E-C40	2CCS552001R0404	0101955	5	2	0.221
	6	50	S402E-C50	2CCS552001R0504	0101962	5	2	0.221
	6	63	S402E-C63	2CCS552001R0634	0101979	5	2	0.221
S403E	6	6	S403E-C6	2CCS553001R0064	0102648	4	3	0.322
	6	8	S403E-C8	2CCS553001R0084	0102655	4	3	0.322
	6	10	S403E-C10	2CCS553001R0104	0102662	4	3	0.322
	6	13	S403E-C13	2CCS553001R0134	0102679	4	3	0.322
	6	16	S403E-C16	2CCS553001R0164	0102686	4	3	0.322
	6	20	S403E-C20	2CCS553001R0204	0102693	4	3	0.322
	6	25	S403E-C25	2CCS553001R0254	0102709	4	3	0.322
	6	32	S403E-C32	2CCS553001R0324	0102716	4	3	0.322
	6	40	S403E-C40	2CCS553001R0404	0102723	4	3	0.322
	6	50	S403E-C50	2CCS553001R0504	0102730	4	3	0.322
	6	63	S403E-C63	2CCS553001R0634	0102747	4	3	0.322

Miniature circuit breaker (MCB) for IEC

MCBs S400E series 6000 C characteristic with protected neutral

—

S400E Characteristic C-NP
Function: protection and control of the circuits against overloads and short-circuits; protection for circuits which supply loads with high inrush current at the circuit closing (LV/LV transformers, breakdown lamps). The neutral is full protected.
Applications: residential, commercial and industrial.
Standard: IEC/EN 60898
Icn =6 kA

	I_{cn} [kA]	I_n [A]	Type name	ABB IT number	EAN number 761227	Pack-aging unit	Module	Weight in Kg
S401 E NP	6	10	S401E-C10NP	2CCS551103R8104	1442750	5	2	0.221
	6	13	S401E-C13NP	2CCS551103R8134	1442767	5	2	0.221
	6	16	S401E-C16NP	2CCS551103R8164	1442774	5	2	0.221
	6	20	S401E-C20NP	2CCS551103R8204	1442781	5	2	0.221
	6	25	S401E-C25NP	2CCS551103R8254	1442798	5	2	0.221
	6	32	S401E-C32NP	2CCS551103R8324	1442804	5	2	0.221
	6	40	S401E-C40NP	2CCS551103R8404	1442811	5	2	0.221
	6	50	S401E-C50NP	2CCS551103R8504	1442828	5	2	0.221
	6	63	S401E-C63NP	2CCS551103R8634	1442835	5	2	0.221
S403 E NP	6	10	S403E-C10NP	2CCS553103R8104	1442842	2	4	0.428
	6	13	S403E-C13NP	2CCS553103R8134	1442859	2	4	0.428
	6	16	S403E-C16NP	2CCS553103R8164	1442866	2	4	0.428
	6	20	S403E-C20NP	2CCS553103R8204	1442873	2	4	0.428
	6	25	S403E-C25NP	2CCS553103R8254	1442880	2	4	0.428
	6	32	S403E-C32NP	2CCS553103R8324	1442897	2	4	0.428
	6	40	S403E-C40NP	2CCS553103R8404	1442903	2	4	0.428
	6	50	S403E-C50NP	2CCS553103R8504	1442910	2	4	0.428
	6	63	S403E-C63NP	2CCS553103R8634	1443009	2	4	0.428

Miniature circuit breaker (MCB) for IEC

S400M and UC series technical feature

				S400M	S400M-UC
General Data	Standards			IEC/EN 60898-1(B,C,D) IEC/EN 60947-2 (C,K)	IEC/EN 60947-2
	Number of poles			1P, 1P+NP, 2P, 3P, 3P+NP	1P, 2P
	Tripping characteristics			B, C, D, K	UCC, UCZ
	Rated Current I_n		A	0.5 … 63 A	0.5 … 63 A
	Rated frequency f		Hz	50 / 60 Hz	50 / 60 Hz
	Rated Insulation voltage U_i acc. to IEC/EN 60664-1		V	440 V AC	440 V AC
	Overvoltage category			III	III
	Pollution degree			3	3
Data acc. to IEC/EN 60898-1 (except S 200 M UC data acc. to IEC/EN 60898-2)	Rated voltage U_n		V	1P: 230/400 V AC 1P+NP: 230 V AC 2P, 3P, 3P+NP: 400 V AC	
	Max. power frequency recovery voltage (U_{max})		V		
	Min. operating voltage		V	12 V AC	
	Rated short-circuit capacity I_{cn}		kA	10 kA	
	Energy limiting class			3	
	Grid distance		mm	35	
	Rated impulse withstand voltage U_{imp}. (1.2 / 50 µs)		kV	4 kV	
	Dielectric test voltage		kV	2 kV (1 min)	
	Reference temperature for tripping characteristics		°C	30°C	
	Electrical endurance		cycles (OFF-ON-OFF)	10 000 ops	
Data acc. to IEC/EN 60947-2	Rated operational voltage U_e		V	1P, 1P+NP: 240 V AC, 254 V AC 2P, 3P, 3P+NP: 240/415 V AC, 254/440 V AC	1P: 110 V DC 1P, 2P: 220 V DC 2P: 440 V DC 1P, 2P: 230/400 V DC
	Max. power frequency recovery voltage (U_{max})		V		
	Min. operating voltage		V	12 V AC - 12 V DC	12 V AC - 12 V DC
	Rated ultimate short-circuit breaking capacity I_{cn}		kA	50 kA (0.5 … 2 A, 240/415 V AC) on request 25 kA (0.5 ... 16 A, 240/415 V AC) 15 kA (20 … to 63 A, 240/415 V AC) 15 kA (0.5 ... 16 A, 254/440 V AC) 6 kA (20 ... 63 A, 254/440 V AC)	10 kA (0.5 ... 63 A, 220 V DC 1pole) 20 kA (0.5 ... 63 A, 110 V DC 1pole) 25 kA (0.5 ... 63 A, 220 V DC 2pole) 10 kA (0.5 ... 63 A, 440 V DC 2pole) 10 kA (0.5 ... 63 A, 230/400 V AC)
	Rated service short-circuit breaking capacity I_{cs}		kA	15 kA (0.5 ... 16 A, 240/415 V AC) 7,5 kA (20 ... 63 A, 240/415 V AC) 6 kA (0.5 ... 16 A, 254/440 V AC) 3 kA (20 ... 63 A, 254/440 V AC)	10 kA (0.5 ... 63 A, 220 V DC 1pole) 10 kA (0.5 ... 63 A, 110 V DC 1pole) 20 kA (0.5 ... 63 A, 220 V DC 2pole) 10 kA (0.5 ... 63 A, 440 V DC 2pole) 6 kA (0.5 ... 63 A, 230/400 V AC)
	Rated impulse withstand voltage U_{imp}. (1.2/50 µs)		kV	4 kV	4 kV
	Dielectric test voltage at ind. freq. for 1 min.		kV		
	Reference temperature for tripping characteristics		°C	30°C (C) 40°C (K)	30°C
	Electrical endurance		cycles (OFF-ON-OFF)	10 000 ops	10 000 ops

Miniature circuit breaker (MCB) for IEC

S400M and UC series technical feature

				S400M	S400M-UC
Mechanical data	Housing			Insulation group I, light grey	Insulation group I, light grey
	Toggle			Insulation group II, black, sealable	Insulation group II, black, sealable
	Mechanical endurance		cycles (OFF-ON-OFF)	20 000 ops	20 000 ops
	Contact position indication (CPI)			green OFF / red ON	green OFF / red ON
	Protecion degree acc. to EN 60529			IP20, IP40 in enclosure with cover	IP20, IP40 in enclosure with cover
	Shock resistance acc. to IEC/EN 61373			Category 1, Class B	Category 1, Class B
	Shock resistance acc. to IEC/EN 60068-2-27 (Test Ea)			5 g / 30 ms	5 g / 30 ms
	Vibration resistance acc. to IEC/EN 60068-2-6 (Test Fc)			5...13.2 Hz / 1 mm 13.2 ...100 Hz / 0.7 g with load 80% x Ie	5...13.2 Hz / 1 mm 13.2 ...100 Hz / 0.7 g with load 80% x Ie
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C / RH	28 cycles with 55 °C / 90...96% and 25 °C / 95...100%	28 cycles with 55 °C / 90...96% and 25 °C / 95...100%
	Ambient temperature		°C	-40 ... +70°C	-40 ... +70°C
	Storage temperature		°C	-40 ... +70°C	-40 ... +70°C
Installation	Terminal type			Failsafe bi-directional cylinder-lift terminal (shock protected) with double slot 35/10 mm2	Failsafe bi-directional cylinder-lift terminal (shock protected) with double slot 35/10 mm2
	Cross-section of conductors (top/bottom)	Solid/ Stranded	mm2	Single: 0.75 ... 35 mm2 (front slot), 0.75 ... 6 mm2 (rear slot) Multiple: 2 x 0.75 ... 10 mm2 (front slot), 2 x 0.75 ... 6 mm2 (rear slot), with cables of same type and size	Single: 0.75 ... 35 mm2 (front slot), 0.75 ... 6 mm2 (rear slot) Multiple: 2 x 0.75 ... 10 mm2 (front slot), 2 x 0.75 ... 6 mm2 (rear slot), with cables of same type and size
		Flexible	mm2	Single: 0.75 ... 25 mm2 (front side), 0.75 ... 6 mm2 (rear slot) Multiple: 2 x 0.75 ... 10 mm2 (front slot), 2 x 0.75 ... 6 mm2 (rear slot), with cables of same type and size	Single: 0.75 ... 25 mm2 (front side), 0.75 ... 6 mm2 (rear slot) Multiple: 2 x 0.75 ... 10 mm2 (front slot), 2 x 0.75 ... 6 mm2 (rear slot), with cables of same type and size
			AWG		
	Cross-section of busbars (top/bottom)		mm2		
			AWG		
	Tightening torque		Nm	2.8 Nm	2.8 Nm
			in-lbs		
	Wire stripping length		mm	12.5 mm	12.5 mm
	Screwdriver			No. 2 Pozidrive	No. 2 Pozidrive
	Mounting			SMISSLINE TP busbars system only	SMISSLINE TP busbars system only
	Mounting position			Any	Any
	Supply			Any	Any
Dimensions and weight	Mounting dimensions acc. to DIN 43880				
	Pole dimensions (H x D x W)		mm	91 x 18 x 82mm	91 x 18 x 82mm
	Pole weight		g	Approx. 115 g	Approx. 115 g
Combination with auxiliary elements	Auxiliary contact			Yes	Yes
	Auxiliary/Signal contact			Yes	Yes
	Bottom fitting auxiliary contact			No	No
	Shunt trip			Yes	Yes
	Undervoltage release			No	No
	Overvoltage release			No	No
	Motor Operating Device			No	No
	Autoreclosing Unit			No	No

Miniature circuit breaker (MCB) for IEC

S400M series 10 000 B characteristic

S 401 M

S 402 M

S 403 M

S400M Characteristic B
Function: protection and control of the circuits against overloads and short-circuits; protection for people and big length cables in TN and IT systems.
Applications: residential, commercial and industrial.
Standard: IEC/EN 60898
Icn=10 kA

Number of poles	Rated current	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
1	4	0101214	S401 M-B 4	2CCS571001R0045		0.110	10
	6	0101221	S401 M-B 6	2CCS571001R0065		0.110	10
	8	0108411	S401 M-B 8	2CCS571001R0085		0.110	10
	10	0101238	S401 M-B 10	2CCS571001R0105		0.110	10
	13	0101245	S401 M-B 13	2CCS571001R0135		0.110	10
	16	0101252	S401 M-B 16	2CCS571001R0165		0.110	10
	20	0101269	S401 M-B 20	2CCS571001R0205		0.110	10
	25	0101276	S401 M-B 25	2CCS571001R0255		0.110	10
	32	0101283	S401 M-B 32	2CCS571001R0325		0.110	10
	40	0101290	S401 M-B 40	2CCS571001R0405		0.110	10
	50	0101306	S401 M-B 50	2CCS571001R0505		0.110	10
	63	0101313	S401 M-B 63	2CCS571001R0635		0.110	10
2	4	0101986	S402 M-B 4	2CCS572001R0045		0.221	5
	6	0101993	S402 M-B 6	2CCS572001R0065		0.221	5
	8	0108428	S402 M-B 8	2CCS572001R0085		0.221	5
	10	0102006	S402 M-B 10	2CCS572001R0105		0.221	5
	13	0102013	S402 M-B 13	2CCS572001R0135		0.221	5
	16	0102020	S402 M-B 16	2CCS572001R0165		0.221	5
	20	0102037	S402 M-B 20	2CCS572001R0205		0.221	5
	25	0102044	S402 M-B 25	2CCS572001R0255		0.221	5
	32	0102051	S402 M-B 32	2CCS572001R0325		0.221	5
	40	0102068	S402 M-B 40	2CCS572001R0405		0.221	5
	50	0102075	S402 M-B 50	2CCS572001R0505		0.221	5
	63	0102082	S402 M-B 63	2CCS572001R0635		0.221	5
3	4	0102754	S403 M-B 4	2CCS573001R0045		0.322	4
	6	0102761	S403 M-B 6	2CCS573001R0065		0.322	4
	8	0108435	S403 M-B 8	2CCS573001R0085		0.322	4
	10	0102778	S403 M-B 10	2CCS573001R0105		0.322	4
	13	0102785	S403 M-B 13	2CCS573001R0135		0.322	4
	16	0102792	S403 M-B 16	2CCS573001R0165		0.322	4
	20	0102808	S403 M-B 20	2CCS573001R0205		0.322	4
	25	0102815	S403 M-B 25	2CCS573001R0255		0.322	4
	32	0102822	S403 M-B 32	2CCS573001R0325		0.322	4
	40	0102839	S403 M-B 40	2CCS573001R0405		0.322	4
	50	0102846	S403 M-B 50	2CCS573001R0505		0.322	4
	63	0102853	S403 M-B 63	2CCS573001R0635		0.322	4

Miniature circuit breaker (MCB) for IEC

MCBs S400M series 10000 C characteristic

S400M Characteristic C

Function: protection and control of the circuits against overloads and short-circuits; protection for resistive and inductive loads with low inrush current.

Applications: residential, commercial and industrial.

Standard: IEC/EN 60898, IEC/EN 60947-2

Icn=10 kA

S401 M

S 402 M

S 403 M

Number of poles	Rated current	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
1	0.5	0101320	S401 M-C 0.5	2CCS571001R0984		0.110	10
	1	0101337	S401 M-C 1	2CCS571001R0014		0.110	10
	1.6	0101344	S401 M-C 1.6	2CCS571001R0974		0.110	10
	2	0101351	S401 M-C 2	2CCS571001R0024		0.110	10
	3	0101368	S401 M-C 3	2CCS571001R0034		0.110	10
	4	0101375	S401 M-C 4	2CCS571001R0044		0.110	10
	6	0101382	S401 M-C 6	2CCS571001R0064		0.110	10
	8	0101399	S401 M-C 8	2CCS571001R0084		0.110	10
	10	0101405	S401 M-C 10	2CCS571001R0104		0.110	10
	13	0101412	S401 M-C 13	2CCS571001R0134		0.110	10
	16	0101429	S401 M-C 16	2CCS571001R0164		0.110	10
	20	0101436	S401 M-C 20	2CCS571001R0204		0.110	10
	25	0101443	S401 M-C 25	2CCS571001R0254		0.110	10
	32	0101450	S401 M-C 32	2CCS571001R0324		0.110	10
	40	0101467	S401 M-C 40	2CCS571001R0404		0.110	10
	50	0101474	S401 M-C 50	2CCS571001R0504		0.110	10
	63	0101481	S401 M-C 63	2CCS571001R0634		0.110	10
2	0.5	0102099	S402 M-C 0.5	2CCS572001R0984		0.221	5
	1	0102105	S402 M-C 1	2CCS572001R0014		0.221	5
	1.6	0102112	S402 M-C 1.6	2CCS572001R0974		0.221	5
	2	0102129	S402 M-C 2	2CCS572001R0024		0.221	5
	3	0102136	S402 M-C 3	2CCS572001R0034		0.221	5
	4	0102143	S402 M-C 4	2CCS572001R0044		0.221	5
	6	0102150	S402 M-C 6	2CCS572001R0064		0.221	5
	8	0102167	S402 M-C 8	2CCS572001R0084		0.221	5
	10	0102174	S402 M-C 10	2CCS572001R0104		0.221	5
	13	0102181	S402 M-C 13	2CCS572001R0134		0.221	5
	16	0102198	S402 M-C 16	2CCS572001R0164		0.221	5
	20	0102204	S402 M-C 20	2CCS572001R0204		0.221	5
	25	0102211	S402 M-C 25	2CCS572001R0254		0.221	5
	32	0102228	S402 M-C 32	2CCS572001R0324		0.221	5
	40	0102235	S402 M-C 40	2CCS572001R0404		0.221	5
	50	0102242	S402 M-C 50	2CCS572001R0504		0.221	5
	63	0102259	S402 M-C 63	2CCS572001R0634		0.221	5
3	0.5	0102860	S403 M-C 0.5	2CCS573001R0984		0.322	4
	1	0102877	S403 M-C 1	2CCS573001R0014		0.322	4
	1.6	0102884	S403 M-C 1.6	2CCS573001R0974		0.322	4
	2	0102891	S403 M-C 2	2CCS573001R0024		0.322	4
	3	0102907	S403 M-C 3	2CCS573001R0034		0.322	4
	4	0102914	S403 M-C 4	2CCS573001R0044		0.322	4
	6	0102921	S403 M-C 6	2CCS573001R0064		0.322	4
	8	0102938	S403 M-C 8	2CCS573001R0084		0.322	4
	10	0102945	S403 M-C 10	2CCS573001R0104		0.322	4
	13	0102952	S403 M-C 13	2CCS573001R0134		0.322	4
	16	0102969	S403 M-C 16	2CCS573001R0164		0.322	4
	20	0102976	S403 M-C 20	2CCS573001R0204		0.322	4
	25	0102983	S403 M-C 25	2CCS573001R0254		0.322	4
	32	0102990	S403 M-C 32	2CCS573001R0324		0.322	4
	40	0103003	S403 M-C 40	2CCS573001R0404		0.322	4
	50	0103010	S403 M-C 50	2CCS573001R0504		0.322	4
	63	0103027	S403 M-C 63	2CCS573001R0634		0.322	4

Miniature circuit breaker (MCB) for IEC

MCBs S400M series 10000 D characteristic

S400M Characteristic D
Function: protection and control of the circuits against overloads and short-circuits; protection for circuits which supply loads with high inrush current at the circuit closing (LV/LV transformers, breakdown lamps).
Applications: residential, commercial and industrial.
Standard: IEC/EN 60898
Icn=10 kA

S 401 M

S 402 M

S 403 M

Number of poles	Rated current	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
1	6	0101498	S401 M-D 6	2CCS571001R0061		0.110	10
	8	0101504	S401 M-D 8	2CCS571001R0081		0.110	10
	10	0101511	S401 M-D 10	2CCS571001R0101		0.110	10
	13	0101528	S401 M-D 13	2CCS571001R0131		0.110	10
	16	0101535	S401 M-D 16	2CCS571001R0161		0.110	10
	20	0101542	S401 M-D 20	2CCS571001R0201		0.110	10
	25	0101559	S401 M-D 25	2CCS571001R0251		0.110	10
	32	0101566	S401 M-D 32	2CCS571001R0321		0.110	10
	40	0101573	S401 M-D 40	2CCS571001R0401		0.110	10
	50	0101580	S401 M-D 50	2CCS571001R0501		0.110	10
	63	0101597	S401 M-D 63	2CCS571001R0631		0.110	10
2	6	0102266	S402 M-D 6	2CCS572001R0061		0.221	5
	8	0102273	S402 M-D 8	2CCS572001R0081		0.221	5
	10	0102280	S402 M-D 10	2CCS572001R0101		0.221	5
	13	0102297	S402 M-D 13	2CCS572001R0131		0.221	5
	16	0102303	S402 M-D 16	2CCS572001R0161		0.221	5
	20	0102310	S402 M-D 20	2CCS572001R0201		0.221	5
	25	0102327	S402 M-D 25	2CCS572001R0251		0.221	5
	32	0102334	S402 M-D 32	2CCS572001R0321		0.221	5
	40	0102341	S402 M-D 40	2CCS572001R0401		0.221	5
	50	0102358	S402 M-D 50	2CCS572001R0501		0.221	5
	63	0102365	S402 M-D 63	2CCS572001R0631		0.221	5
3	6	0103034	S403 M-D 6	2CCS573001R0061		0.322	4
	8	0103041	S403 M-D 8	2CCS573001R0081		0.322	4
	10	0103058	S403 M-D 10	2CCS573001R0101		0.322	4
	13	0103065	S403 M-D 13	2CCS573001R0131		0.322	4
	16	0103072	S403 M-D 16	2CCS573001R0161		0.322	4
	20	0103089	S403 M-D 20	2CCS573001R0201		0.322	4
	25	0103096	S403 M-D 25	2CCS573001R0251		0.322	4
	32	0103102	S403 M-D 32	2CCS573001R0321		0.322	4
	40	0103119	S403 M-D 40	2CCS573001R0401		0.322	4
	50	0103126	S403 M-D 50	2CCS573001R0501		0.322	4
	63	0103133	S403 M-D 63	2CCS573001R0631		0.322	4

SMISSLINE TP plug-in system

MCBs S 400 M series 5000-15000 K characteristic

S401 M

S 402 M

S 403 M

S400M Characteristic K

Function: protection and control of the circuits like motors, transformer and auxiliary circuits, against overloads and short-circuits. Advantages: no nuisance tripping in the case of functional peak currents up to 10xIn, depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines.

Applications: commercial and industrial.

Standard: IEC/EN 60947-2

Icu = 50 kA ≤ 2A, 25 kA for 3 A ≤ 16A, 15 kA for 32 A ≤ 63 A

Number of poles	Rated current	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
1	0.5	0101603	S401 M-K 0.5	2CCS571001R0157		0.110	10
	1	0101610	S401 M-K 1	2CCS571001R0217		0.110	10
	1.6	0101627	S401 M-K 1.6	2CCS571001R0257		0.110	10
	2	0101634	S401 M-K 2	2CCS571001R0277		0.110	10
	3	0101641	S401 M-K 3	2CCS571001R0317		0.110	10
	4	0101658	S401 M-K 4	2CCS571001R0337		0.110	10
	6	0101665	S401 M-K 6	2CCS571001R0377		0.110	10
	8	0101672	S401 M-K 8	2CCS571001R0407		0.110	10
	10	0101689	S401 M-K 10	2CCS571001R0427		0.110	10
	13	0101696	S401 M-K 13	2CCS571001R0447		0.110	10
	16	0101702	S401 M-K 16	2CCS571001R0467		0.110	10
	20	0101719	S401 M-K 20	2CCS571001R0487		0.110	10
	25	0101726	S401 M-K 25	2CCS571001R0517		0.110	10
	32	0101733	S401 M-K 32	2CCS571001R0537		0.110	10
	40	0101740	S401 M-K 40	2CCS571001R0557		0.110	10
	50	0101757	S401 M-K 50	2CCS571001R0577		0.110	10
	63	0101764	S401 M-K 63	2CCS571001R0597		0.110	10
2	0.5	0102372	S402 M-K 0.5	2CCS572001R0157		0.221	5
	1	0102389	S402 M-K 1	2CCS572001R0217		0.221	5
	1.6	0102396	S402 M-K 1.6	2CCS572001R0257		0.221	5
	2	0102402	S402 M-K 2	2CCS572001R0277		0.221	5
	3	0102419	S402 M-K 3	2CCS572001R0317		0.221	5
	4	0102426	S402 M-K 4	2CCS572001R0337		0.221	5
	6	0102433	S402 M-K 6	2CCS572001R0377		0.221	5
	8	0102440	S402 M-K 8	2CCS572001R0407		0.221	5
	10	0102457	S402 M-K 10	2CCS572001R0427		0.221	5
	13	0102464	S402 M-K 13	2CCS572001R0447		0.221	5
	16	0102471	S402 M-K 16	2CCS572001R0467		0.221	5
	20	0102488	S402 M-K 20	2CCS572001R0487		0.221	5
	25	0102495	S402 M-K 25	2CCS572001R0517		0.221	5
	32	0102501	S402 M-K 32	2CCS572001R0537		0.221	5
	40	0102518	S402 M-K 40	2CCS572001R0557		0.221	5
	50	0102525	S402 M-K 50	2CCS572001R0577		0.221	5
	63	0102532	S402 M-K 63	2CCS572001R0597		0.221	5
3	0.5	0103140	S403 M-K 0.5	2CCS573001R0157		0.322	4
	1	0103157	S403 M-K 1	2CCS573001R0217		0.322	4
	1.6	0103164	S403 M-K 1.6	2CCS573001R0257		0.322	4
	2	0103171	S403 M-K 2	2CCS573001R0277		0.322	4
	3	0103188	S403 M-K 3	2CCS573001R0317		0.322	4
	4	0103195	S403 M-K 4	2CCS573001R0337		0.322	4
	6	0103201	S403 M-K 6	2CCS573001R0377		0.322	4
	8	0103218	S403 M-K 8	2CCS573001R0407		0.322	4
	10	0103225	S403 M-K 10	2CCS573001R0427		0.322	4
	13	0103232	S403 M-K 13	2CCS573001R0447		0.322	4
	16	0103249	S403 M-K 16	2CCS573001R0467		0.322	4
	20	0103256	S403 M-K 20	2CCS573001R0487		0.322	4
	25	0103263	S403 M-K 25	2CCS573001R0517		0.322	4
	32	0103270	S403 M-K 32	2CCS573001R0537		0.322	4
	40	0103287	S403 M-K 40	2CCS573001R0557		0.322	4
	50	0103294	S403 M-K 50	2CCS573001R0577		0.322	4
	63	0103300	S403 M-K 63	2CCS573001R0597		0.322	4

SMISSLINE TP plug-in system

MCBs S 400 M series 10000 B characteristic, with protected neutral

S401M-NP

S403M-NP

S400M Characteristic B-NP
Function: protection and control of the circuits against overloads and short-circuits; protection for people and big length cables in TN and IT systems. The neutral is full protected.
Applications: residential, commercial and industrial.
Standard: IEC/EN 60898
Icn=10 kA

Number of poles	Rated current	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
2	6	0103317	S401 M-B 6NP	2CCS571103R8065		0.221	5
	8	0108473	S401 M-B 8NP	2CCS571103R8085		0.221	5
	10	0103324	S401 M-B 10NP	2CCS571103R8105		0.221	5
	13	0103331	S401 M-B 13NP	2CCS571103R8135		0.221	5
	16	0103348	S401 M-B 16NP	2CCS571103R8165		0.221	5
	20	0103355	S401 M-B 20NP	2CCS571103R8205		0.221	5
	25	0103362	S401 M-B 25NP	2CCS571103R8255		0.221	5
	32	0103379	S401 M-B 32NP	2CCS571103R8325		0.221	5
	40	0103386	S401 M-B 40NP	2CCS571103R8405		0.221	5
	50	0103393	S401 M-B 50NP	2CCS571103R8505		0.221	5
	63	0103409	S401 M-B 63NP	2CCS571103R8635		0.221	5
4	6	0103782	S403 M-B 6NP	2CCS573103R8065		0.428	2
	8	0108510	S403 M-B 8NP	2CCS573103R8085		0.428	2
	10	0103799	S403 M-B 10NP	2CCS573103R8105		0.428	2
	13	0103805	S403 M-B 13NP	2CCS573103R8135		0.428	2
	16	0103812	S403 M-B 16NP	2CCS573103R8165		0.428	2
	20	0103829	S403 M-B 20NP	2CCS573103R8205		0.428	2
	25	0103836	S403 M-B 25NP	2CCS573103R8255		0.428	2
	32	0103843	S403 M-B 32NP	2CCS573103R8325		0.428	2
	40	0103850	S403 M-B 40NP	2CCS573103R8405		0.428	2
	50	0103867	S403 M-B 50NP	2CCS573103R8505		0.428	2
	63	0103874	S403 M-B 63NP	2CCS573103R8635		0.428	2

Miniature circuit breaker (MCB) for IEC

S400M series 10 000 C characteristic, with protected neutral

S401M-NP

S403M-NP

S400M Characteristic C-NP

Function: protection and control of the circuits against overloads and short-circuits; protection for resistive and inductive loads with low inrush current. The neutral is full protected.

Applications: residential, commercial and industrial.

Standard: IEC/EN 60898, IEC/EN 60947-2

Icn = 10 kA

Number of poles	Rated current	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
2	2	0108480	S401 M-C 2NP	2CCS571103R8024		0.221	5
	3	0108497	S401 M-C 3NP	2CCS571103R8034		0.221	5
	4	0108503	S401 M-C 4NP	2CCS571103R8044		0.221	5
	6	0103416	S401 M-C 6NP	2CCS571103R8064		0.221	5
	8	0103423	S401 M-C 8NP	2CCS571103R8084		0.221	5
	10	0103430	S401 M-C 10NP	2CCS571103R8104		0.221	5
	13	0103447	S401 M-C 13NP	2CCS571103R8134		0.221	5
	16	0103454	S401 M-C 16NP	2CCS571103R8164		0.221	5
	20	0103461	S401 M-C 20NP	2CCS571103R8204		0.221	5
	25	0103478	S401 M-C 25NP	2CCS571103R8254		0.221	5
	32	0103485	S401 M-C 32NP	2CCS571103R8324		0.221	5
	40	0103492	S401 M-C 40NP	2CCS571103R8404		0.221	5
	50	0103508	S401 M-C 50NP	2CCS571103R8504		0.221	5
	63	0103515	S401 M-C 63NP	2CCS571103R8634		0.221	5
4	2	0108527	S403 M-C 2NP	2CCS573103R8024		0.428	2
	3	0108534	S403 M-C 3NP	2CCS573103R8034		0.428	2
	4	0108541	S403 M-C 4NP	2CCS573103R8044		0.428	2
	6	0103881	S403 M-C 6NP	2CCS573103R8064		0.428	2
	8	0103898	S403 M-C 8NP	2CCS573103R8084		0.428	2
	10	0103904	S403 M-C 10NP	2CCS573103R8104		0.428	2
	13	0103911	S403 M-C 13NP	2CCS573103R8134		0.428	2
	16	0103928	S403 M-C 16NP	2CCS573103R8164		0.428	2
	20	0103935	S403 M-C 20NP	2CCS573103R8204		0.428	2
	25	0103942	S403 M-C 25NP	2CCS573103R8254		0.428	2
	32	0103959	S403 M-C 32NP	2CCS573103R8324		0.428	2
	40	0103966	S403 M-C 40NP	2CCS573103R8404		0.428	2
	50	0103973	S403 M-C 50NP	2CCS573103R8504		0.428	2
	63	0103980	S403 M-C 63NP	2CCS573103R8634		0.428	2

Miniature circuit breaker (MCB) for IEC

S400M series 10 000 D characteristic, with protected neutral

S401M -NP

S403M -NP

S400M Characteristic D-NP
Function: protection and control of the circuits against overloads and short-circuits; protection for circuits which supply loads with high inrush current at the circuit closing (LV/LV transformers, breakdown lamps). The neutral is full protected.
Applications: residential, commercial and industrial.
Standard: IEC/EN 60898
Icn=10 kA

Number of poles	Rated current	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
2	10	0103522	S401 M-D 10NP	2CCS571103R8101		0.221	5
	13	0103539	S401 M-D 13NP	2CCS571103R8131		0.221	5
	16	0103546	S401 M-D 16NP	2CCS571103R8161		0.221	5
	20	0103553	S401 M-D 20NP	2CCS571103R8201		0.221	5
	25	0103560	S401 M-D 25NP	2CCS571103R8251		0.221	5
	32	0103577	S401 M-D 32NP	2CCS571103R8321		0.221	5
	40	0103584	S401 M-D 40NP	2CCS571103R8401		0.221	5
	50	0103591	S401 M-D 50NP	2CCS571103R8501		0.221	5
	63	0103607	S401 M-D 63NP	2CCS571103R8631		0.221	5
4	10	0103997	S403 M-D 10NP	2CCS573103R8101		0.428	2
	13	0104000	S403 M-D 13NP	2CCS573103R8131		0.428	2
	16	0104017	S403 M-D 16NP	2CCS573103R8161		0.428	2
	20	0104024	S403 M-D 20NP	2CCS573103R8201		0.428	2
	25	0104031	S403 M-D 25NP	2CCS573103R8251		0.428	2
	32	0104048	S403 M-D 32NP	2CCS573103R8321		0.428	2
	40	0104055	S403 M-D 40NP	2CCS573103R8401		0.428	2
	50	0104062	S403 M-D 50NP	2CCS573103R8501		0.428	2
	63	0104079	S403 M-D 63NP	2CCS573103R8631		0.428	2

Miniature circuit breaker (MCB) for IEC

S400M series 5 000-15 000 K characteristic, with protected neutral

S401M -NP

S403M - NP

S400M Characteristic K-NP

Function: protection and control of the circuits like motors, transformer and auxiliary circuits, against overloads and short-circuits.

Advantages: no nuisance tripping in the case of functional peak currents up to 10 x In, depending on the series; through its highly sensitive thermostatic bimetal trip, the K-type characteristic offers protection to damageable elements in the overcurrent range; it also provides the best protection to cables and lines. The neutral is full protected.

Applications: commercial and industrial.

Standard: IEC/EN 60947-2

Icu = 50 kA ≤ 2A, 25 kA for 3 A ≤ 16A, 15 kA for 32 A ≤ 63 A

Number of poles	Rated current	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
2	0.5	0103614	S401 M-K 0.5NP	2CCS571103R8157		0.221	5
	1	0103621	S401 M-K 1NP	2CCS571103R8217		0.221	5
	1.6	0103638	S401 M-K 1.6NP	2CCS571103R8257		0.221	5
	2	0103645	S401 M-K 2NP	2CCS571103R8277		0.221	5
	3	0103652	S401 M-K 3NP	2CCS571103R8317		0.221	5
	4	0103669	S401 M-K 4NP	2CCS571103R8337		0.221	5
	6	0103676	S401 M-K 6NP	2CCS571103R8377		0.221	5
	8	0103683	S401 M-K 8NP	2CCS571103R8407		0.221	5
	10	0103690	S401 M-K 10NP	2CCS571103R8427		0.221	5
	13	0103706	S401 M-K 13NP	2CCS571103R8447		0.221	5
	16	0103713	S401 M-K 16NP	2CCS571103R8467		0.221	5
	20	0103720	S401 M-K 20NP	2CCS571103R8487		0.221	5
	25	0103737	S401 M-K 25NP	2CCS571103R8517		0.221	5
	32	0103744	S401 M-K 32NP	2CCS571103R8537		0.221	5
	40	0103751	S401 M-K 40NP	2CCS571103R8557		0.221	5
	50	0103768	S401 M-K 50NP	2CCS571103R8577		0.221	5
	63	0103775	S401 M-K 63NP	2CCS571103R8597		0.221	5
4	0.5	0104086	S403 M-K 0.5NP	2CCS573103R8157		0.428	2
	1	0104093	S403 M-K 1NP	2CCS573103R8217		0.428	2
	1.6	0104109	S403 M-K 1.6NP	2CCS573103R8257		0.428	2
	2	0104116	S403 M-K 2NP	2CCS573103R8277		0.428	2
	3	0104123	S403 M-K 3NP	2CCS573103R8317		0.428	2
	4	0104130	S403 M-K 4NP	2CCS573103R8337		0.428	2
	6	0104147	S403 M-K 6NP	2CCS573103R8377		0.428	2
	8	0104154	S403 M-K 8NP	2CCS573103R8407		0.428	2
	10	0104161	S403 M-K 10NP	2CCS573103R8427		0.428	2
	13	0104178	S403 M-K 13NP	2CCS573103R8447		0.428	2
	16	0104185	S403 M-K 16NP	2CCS573103R8467		0.428	2
	20	0104192	S403 M-K 20NP	2CCS573103R8487		0.428	2
	25	0104208	S403 M-K 25NP	2CCS573103R8517		0.428	2
	32	0104215	S403 M-K 32NP	2CCS573103R8537		0.428	2
	40	0104222	S403 M-K 40NP	2CCS573103R8557		0.428	2
	50	0104239	S403 M-K 50NP	2CCS573103R8577		0.428	2
	63	0104246	S403 M-K 63NP	2CCS573103R8597		0.428	2

Miniature circuit breaker (MCB) for IEC

S400M-UC series 10000-25000 C characteristic, DC application

S400UC Characteristic C
Function: protection and control of the circuits against overloads and short-circuits; protection for resistive and inductive loads with low inrush current.
Applications: residential, commercial and industrial.
Standard: IEC/EN 60947-2
10 kA (0,5 up to 63 A, 220 V d.c. 1pole), 20 kA (0,5 up to 63 A, 110 V d.c. 1pole)
25 kA (0,5 up to 63 A, 220 V d.c. 2pole), 10 kA (0,5 up to 63 A, 440 V d.c. 2pole)
10 kA (0,5 up to 63 A, 230/400 V) a.c.

1 P 220V d.c.

2 P 440V d.c.

Number of poles	Rated current	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
1	0.5	0109746	S401M-UCC0.5	2CCS561001R1984		0.110	10
	1	0109753	S401M-UCC1	2CCS561001R1014		0.110	10
	1.6	0109760	S401M-UCC1.6	2CCS561001R1974		0.110	10
	2	0109777	S401M-UCC2	2CCS561001R1024		0.110	10
	3	0109784	S401M-UCC3	2CCS571001R1034		0.110	10
	4	0109791	S401M-UCC4	2CCS571001R1044		0.110	10
	6	0109807	S401M-UCC6	2CCS571001R1064		0.110	10
	8	0109814	S401M-UCC8	2CCS571001R1084		0.110	10
	10	0109821	S401M-UCC10	2CCS571001R1104		0.110	10
	13	0109838	S401M-UCC13	2CCS571001R1134		0.110	10
	16	0109845	S401M-UCC16	2CCS571001R1164		0.110	10
	20	0109852	S401M-UCC20	2CCS571001R1204		0.110	10
	25	0109869	S401M-UCC25	2CCS571001R1254		0.110	10
	32	0109876	S401M-UCC32	2CCS571001R1324		0.110	10
	40	0109883	S401M-UCC40	2CCS571001R1404		0.110	10
	50	0109890	S401M-UCC50	2CCS571001R1504		0.110	10
	63	0109906	S401M-UCC63	2CCS571001R1634		0.110	10
2	0.5	0109913	S402M-UCC0.5	2CCS562001R1984		0.221	5
	1	0109920	S402M-UCC1	2CCS562001R1014		0.221	5
	1.6	0109937	S402M-UCC1.6	2CCS562001R1974		0.221	5
	2	0109944	S402M-UCC2	2CCS562001R1024		0.221	5
	3	0109951	S402M-UCC3	2CCS572001R1034		0.221	5
	4	0109968	S402M-UCC4	2CCS572001R1044		0.221	5
	6	0109975	S402M-UCC6	2CCS572001R1064		0.221	5
	8	0109982	S402M-UCC8	2CCS572001R1084		0.221	5
	10	0109999	S402M-UCC10	2CCS572001R1104		0.221	5
	13	0110001	S402M-UCC13	2CCS572001R1134		0.221	5
	16	0110018	S402M-UCC16	2CCS572001R1164		0.221	5
	20	0110025	S402M-UCC20	2CCS572001R1204		0.221	5
	25	0110032	S402M-UCC25	2CCS572001R1254		0.221	5
	32	0110049	S402M-UCC32	2CCS572001R1324		0.221	5
	40	0110056	S402M-UCC40	2CCS572001R1404		0.221	5
	50	0110063	S402M-UCC50	2CCS572001R1504		0.221	5
	63	0110070	S402M-UCC63	2CCS572001R1634		0.221	5

Connection diagram, single-pole (max. 220V d.c.) S401M-UCC



Connection diagram, two-pole (max. 440V d.c.) S402M-UCC



Miniature circuit breaker (MCB) for IEC

S400M-UC series 10000-25000 Z characteristic, DC application

S400UC Characteristic Z

Function: protection and control of the electronic circuits against weak and long duration overloads and short-circuits.

Applications: commercial and industrial.

Standard: IEC/EN 60947-2

10 kA (0,5 up to 63 A, 220 V d.c. 1pole), 20 kA (0,5 up to 63 A, 110 V d.c. 1pole)

25 kA (0,5 up to 63 A, 220 V d.c. 2pole), 10 kA (0,5 up to 63 A, 440 V d.c. 2pole)

10 kA (0,5 up to 63 A, 230/400 V) a.c.

1 P 220V d.c.

2 P 440V d.c.

Number of poles	Rated current	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In A	EAN	Type code	Order code		kg	pc.
1	0.5	0110087	S401M-UCZ0.5	2CCS561001R1988		0.110	10
	1	0110094	S401M-UCZ1	2CCS561001R1018		0.110	10
	1.6	0110100	S401M-UCZ1.6	2CCS561001R1978		0.110	10
	2	0110117	S401M-UCZ2	2CCS561001R1028		0.110	10
	3	0110124	S401M-UCZ3	2CCS571001R1038		0.110	10
	4	0110131	S401M-UCZ4	2CCS571001R1048		0.110	10
	6	0110148	S401M-UCZ6	2CCS571001R1068		0.110	10
	8	0110155	S401M-UCZ8	2CCS571001R1088		0.110	10
	10	0110162	S401M-UCZ10	2CCS571001R1108		0.110	10
	13	0110179	S401M-UCZ13	2CCS571001R1138		0.110	10
	16	0110186	S401M-UCZ16	2CCS571001R1168		0.110	10
	20	0110193	S401M-UCZ20	2CCS571001R1208		0.110	10
	25	0110209	S401M-UCZ25	2CCS571001R1258		0.110	10
	32	0110216	S401M-UCZ32	2CCS571001R1328		0.110	10
	40	0110223	S401M-UCZ40	2CCS571001R1408		0.110	10
	50	0110230	S401M-UCZ50	2CCS571001R1508		0.110	10
	63	0110247	S401M-UCZ63	2CCS571001R1638		0.110	10
2	0.5	0110254	S402M-UCZ0.5	2CCS562001R1988		0.221	5
	1	0110261	S402M-UCZ1	2CCS562001R1018		0.221	5
	1.6	0110278	S402M-UCZ1.6	2CCS562001R1978		0.221	5
	2	0110285	S402M-UCZ2	2CCS562001R1028		0.221	5
	3	0110292	S402M-UCZ3	2CCS572001R1038		0.221	5
	4	0110308	S402M-UCZ4	2CCS572001R1048		0.221	5
	6	0110315	S402M-UCZ6	2CCS572001R1068		0.221	5
	8	0110322	S402M-UCZ8	2CCS572001R1088		0.221	5
	10	0110339	S402M-UCZ10	2CCS572001R1108		0.221	5
	13	0110346	S402M-UCZ13	2CCS572001R1138		0.221	5
	16	0110353	S402M-UCZ16	2CCS572001R1168		0.221	5
	20	0110360	S402M-UCZ20	2CCS572001R1208		0.221	5
	25	0110377	S402M-UCZ25	2CCS572001R1258		0.221	5
	32	0110384	S402M-UCZ32	2CCS572001R1328		0.221	5
	40	0110391	S402M-UCZ40	2CCS572001R1408		0.221	5
	50	0110407	S402M-UCZ50	2CCS572001R1508		0.221	5
	63	0110414	S402M-UCZ63	2CCS572001R1638		0.221	5

Connection diagram, single-pole (max. 220V d.c.) S401M-UCZ



Connection diagram, two-pole (max. 440V d.c.) S402M-UCZ



Miniature circuit breaker (MCB) for IEC

S400P series technical feature

New MCBs catalog template				S400P
General data	Standards			IEC/EN 606947-2
	Number of poles			1P, 1P+NP, 2P, 3P, 3P+NP
	Tripping characteristics			B, C, K
	Rated Current I_n		A	2 … 63 A
	Rated frequency f		Hz	50 / 60 Hz
	Rated Insulation voltage U_i acc. to IEC/EN 60664-1		V	440 V AC (240/415 VAC) 500 V AC (277/480 V AC)
	Overvoltage category			III
	Pollution degree			3 (240/415 V AC) 2 (277/480 VAC)
Data acc. to IEC/EN 60947-2	Rated operational voltage Ue		V	1P, 1P+NP: 240 V AC, 277 V AC 2P, 3P, 3P+NP: 240/415 V AC, 277/480 V AC
	Max. power frequency recovery voltage (U_{max})		V	
	Min. operating voltage		V	12 V AC - 12 V DC
	Rated ultimate short-circuit breaking capacity I_{cu}		kA	40 kA (2 ... 16 A, 240/415 V AC) 30 kA (20 ... 40 A, 240/415 V AC) 20 kA (50 … 63 A, 240/415 V AC) 20 kA (2 ... 16 A, 277/480 V AC) 15 kA (20 ... 40 A, 277/480 V AC) 5 kA (50 … 63 A, 277/480 V AC)
	Rated service short-circuit breaking capacity I_{cs}		kA	20 kA (2 ... 16 A, 240/415 V AC) 15 kA (20 ... 40 A, 240/415 V AC) 7.5 kA (50 …. 63 A, 240/415 V AC) 40 kA (2 ... 16 A, 277/480 V AC) 5 kA (20 ... 40 A, 277/480 V AC) 2.5 kA (50 … 63 A, 277/480 V AC)
	Rated impulse withstand voltage U_{imp}. (1.2/50 µs)		kV	4 kV
	Dielectric test voltage at ind. freq. for 1 min.		kV	
	Reference temperature for tripping characteristics		°C	30°C (B, C) 40°C (K)
	Electrical endurance		cycles (OFF-ON-OFF)	10 000 ops
Mechanical data	Housing			Insulation group I, light grey
	Toggle			Insulation group II, black, sealable
	Mechanical endurance		cycles (OFF-ON-OFF)	20 000 ops
	Contact position indication (CPI)			green OFF / red ON
	Protecion degree acc. to EN 60529			IP20, IP40 in enclosure with cover
	Shock resistance acc. to IEC/EN 61373			Category 1, Class B
	Shock resistance acc. to IEC/EN 60068-2-27 (Test Ea)			5 g / 30 ms
	Vibration resistance acc. to IEC/EN 60068-2-6 (Test Fc)			5…13.2 Hz / 1 mm 13.2 …100 Hz / 0.7 g with load 80% x Ie
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C / RH	28 cycles with 55 °C / 90…96% and 25 °C / 95…100%
	Ambient temperature		°C	-40 … +70°C
	Storage temperature		°C	-40 … +70°C
Installation	Terminal type			Failsafe bi-directional cylinder-lift terminal (shock protected) with double slot 35/10 mm2
	Cross-section of conductors (top/bottom)	Solid/ Stranded	mm²	Single: 0.75 ÷ 35 mm² (front slot), 0.75 ÷ 6 mm² (rear slot) Multiple: 2x 0.75 ÷ 10 mm² (front slot), 2x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size
		Flexible	mm²	Single: 0.75 ÷ 25 mm² (front side), 0.75 ÷ 6 mm2 (rear slot) Multiple: 2x 0.75 ÷ 10 mm² (front slot), 2x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size
			AWG	
	Cross-section of busbars (top/bottom)		mm2	
			AWG	
	Tightening torque		Nm	2.8 Nm
			in-lbs	
	Wire stripping length		mm	12.5 mm
	Screwdriver			No. 2 Pozidrive
	Mounting			SMISSLINE TP busbars system only
	Mounting position			Any
	Supply			Any

Miniature circuit breaker (MCB) for IEC

S400P series technical feature

New MCBs catalog template				S400P
Dimensions and weight	Mounting dimensions acc. to DIN 43880			
	Pole dimensions (H x D x W)		mm	91 x 18 x 82mm
	Pole weight		g	Approx. 115 g
Combination with auxiliary elements	Auxiliary contact			Yes
	Auxiliary/Signal contact			Yes
	Bottom fitting auxiliary contact			No
	Shunt trip			Yes
	Undervoltage release			No
	Overvoltage release			No
	Motor Operating Device			No
	Autoreclosing Unit			No

Miniature circuit breaker (MCB) for IEC

S 400 P series, I_{cu} = 40 … 20 kA B characteristic S400P-B, I_{cu} = 40 … 20 kA

B according to IEC/EN 60947-2

	I_{cu}	I_n	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
	[kA]	[A]	EAN	Type code	Order code		kg	pc.
S401P	40	2	508418	S401P-B2	2CCG000364R0001	1	0.115	10
	40	3	508425	S401P-B3	2CCG000475R0001	1	0.115	10
	40	4	508432	S401P-B4	2CCG000497R0001	1	0.115	10
	40	6	508449	S401P-B6	2CCG000508R0001	1	0.115	10
	40	8	508456	S401P-B8	2CCG000519R0001	1	0.115	10
	40	10	508463	S401P-B10	2CCG000530R0001	1	0.115	10
	40	13	508470	S401P-B13	2CCG000541R0001	1	0.115	10
	40	16	508487	S401P-B16	2CCG000552R0001	1	0.115	10
	30	20	508494	S401P-B20	2CCG000563R0001	1	0.115	10
	30	25	508500	S401P-B25	2CCG000365R0001	1	0.115	10
	30	32	508517	S401P-B32	2CCG000376R0001	1	0.115	10
	30	40	508524	S401P-B40	2CCG000387R0001	1	0.115	10
	20	50	508531	S401P-B50	2CCG000398R0001	1	0.115	10
	20	63	508548	S401P-B63	2CCG000409R0001	1	0.115	10
S402P	40	2	508692	S402P-B2	2CCG000496R0001	2	0.230	5
	40	3	508708	S402P-B3	2CCG000498R0001	2	0.230	5
	40	4	508715	S402P-B4	2CCG000499R0001	2	0.230	5
	40	6	508722	S402P-B6	2CCG000500R0001	2	0.230	5
	40	8	508739	S402P-B8	2CCG000501R0001	2	0.230	5
	40	10	508746	S402P-B10	2CCG000502R0001	2	0.230	5
	40	13	508753	S402P-B13	2CCG000503R0001	2	0.230	5
	40	16	508760	S402P-B16	2CCG000504R0001	2	0.230	5
	30	20	508777	S402P-B20	2CCG000505R0001	2	0.230	5
	30	25	508784	S402P-B25	2CCG000506R0001	2	0.230	5
	30	32	508791	S402P-B32	2CCG000507R0001	2	0.230	5
	30	40	508807	S402P-B40	2CCG000509R0001	2	0.230	5
	20	50	508814	S402P-B50	2CCG000510R0001	2	0.230	5
	20	63	508821	S402P-B63	2CCG000511R0001	2	0.230	5
S403P	40	2	508838	S403P-B2	2CCG000512R0001	3	0.345	4
	40	3	508845	S403P-B3	2CCG000513R0001	3	0.345	4
	40	4	508852	S403P-B4	2CCG000514R0001	3	0.345	4
	40	6	508869	S403P-B6	2CCG000515R0001	3	0.345	4
	40	8	508876	S403P-B8	2CCG000516R0001	3	0.345	4
	40	10	508883	S403P-B10	2CCG000517R0001	3	0.345	4
	40	13	508890	S403P-B13	2CCG000518R0001	3	0.345	4
	40	16	508906	S403P-B16	2CCG000520R0001	3	0.345	4
	30	20	508913	S403P-B20	2CCG000521R0001	3	0.345	4
	30	25	508920	S403P-B25	2CCG000522R0001	3	0.345	4
	30	32	508937	S403P-B32	2CCG000523R0001	3	0.345	4
	30	40	508944	S403P-B40	2CCG000524R0001	3	0.345	4
	20	50	508951	S403P-B50	2CCG000525R0001	3	0.345	4
	20	63	508968	S403P-B63	2CCG000526R0001	3	0.345	4

Ordering details for auxiliary switch and signal contacts on page 49–50

Miniature circuit breaker (MCB) for IEC

S400P series, I_{cu} = 40 … 20 kA C characteristic

C according to IEC/EN 60947-2

	I_{cu}	I_n	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
	[kA]	[A]	EAN	Type code	Order code		kg	pc.
S401P	40	2	509118	S401P-C2	2CCG000543R0001	1	0.115	10
	40	3	509125	S401P-C3	2CCG000544R0001	1	0.115	10
	40	4	509132	S401P-C4	2CCG000545R0001	1	0.115	10
	40	6	509149	S401P-C6	2CCG000546R0001	1	0.115	10
	40	8	509156	S401P-C8	2CCG000547R0001	1	0.115	10
	40	10	509163	S401P-C10	2CCG000548R0001	1	0.115	10
	40	13	509170	S401P-C13	2CCG000549R0001	1	0.115	10
	40	16	509187	S401P-C16	2CCG000550R0001	1	0.115	10
	30	20	509194	S401P-C20	2CCG000551R0001	1	0.115	10
	30	25	509200	S401P-C25	2CCG000553R0001	1	0.115	10
	30	32	509217	S401P-C32	2CCG000554R0001	1	0.115	10
	30	40	509224	S401P-C40	2CCG000555R0001	1	0.115	10
	20	50	509231	S401P-C50	2CCG000556R0001	1	0.115	10
	20	63	509248	S401P-C63	2CCG000557R0001	1	0.115	10
S402P	40	2	509392	S402P-C2	2CCG000573R0001	2	0.230	5
	40	3	509408	S402P-C3	2CCG000366R0001	2	0.230	5
	40	4	509415	S402P-C4	2CCG000367R0001	2	0.230	5
	40	6	509422	S402P-C6	2CCG000368R0001	2	0.230	5
	40	8	509439	S402P-C8	2CCG000369R0001	2	0.230	5
	40	10	509446	S402P-C10	2CCG000370R0001	2	0.230	5
	40	13	509453	S402P-C13	2CCG000371R0001	2	0.230	5
	40	16	509460	S402P-C16	2CCG000372R0001	2	0.230	5
	30	20	509477	S402P-C20	2CCG000373R0001	2	0.230	5
	30	25	509484	S402P-C25	2CCG000374R0001	2	0.230	5
	30	32	509491	S402P-C32	2CCG000375R0001	2	0.230	5
	30	40	509507	S402P-C40	2CCG000377R0001	2	0.230	5
	20	50	509514	S402P-C50	2CCG000378R0001	2	0.230	5
	20	63	509521	S402P-C63	2CCG000379R0001	2	0.230	5
S403P	40	2	509538	S403P-C2	2CCG000380R0001	3	0.345	4
	40	3	509545	S403P-C3	2CCG000381R0001	3	0.345	4
	40	4	509552	S403P-C4	2CCG000382R0001	3	0.345	4
	40	6	509569	S403P-C6	2CCG000383R0001	3	0.345	4
	40	8	509576	S403P-C8	2CCG000384R0001	3	0.345	4
	40	10	509583	S403P-C10	2CCG000385R0001	3	0.345	4
	40	13	509590	S403P-C13	2CCG000386R0001	3	0.345	4
	40	16	509606	S403P-C16	2CCG000388R0001	3	0.345	4
	30	20	509613	S403P-C20	2CCG000389R0001	3	0.345	4
	30	25	509620	S403P-C25	2CCG000390R0001	3	0.345	4
	30	32	509637	S403P-C32	2CCG000391R0001	3	0.345	4
	30	40	509644	S403P-C40	2CCG000392R0001	3	0.345	4
	20	50	509651	S403P-C50	2CCG000393R0001	3	0.345	4
	20	63	509668	S403P-C63	2CCG000394R0001	3	0.345	4

Ordering details for auxiliary switch and signal contacts on page 49–50

Miniature circuit breaker (MCB) for IEC

S400P series, I_{cu} = 40 … 20 kA K characteristic

K according to IEC/EN 60947-2

	I_{cu}	I_n	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
	[kA]	[A]	EAN	Type code	Order code		kg	pc.
S401P	40	2	509811	S401P-K2	2CCG000411R0001	1	0.115	10
	40	3	509828	S401P-K3	2CCG000412R0001	1	0.115	10
	40	4	509835	S401P-K4	2CCG000413R0001	1	0.115	10
	40	6	509842	S401P-K6	2CCG000414R0001	1	0.115	10
	40	8	509859	S401P-K8	2CCG000415R0001	1	0.115	10
	40	10	509866	S401P-K10	2CCG000416R0001	1	0.115	10
	40	13	509873	S401P-K13	2CCG000417R0001	1	0.115	10
	40	16	509880	S401P-K16	2CCG000418R0001	1	0.115	10
	30	20	509897	S401P-K20	2CCG000419R0001	1	0.115	10
	30	25	509903	S401P-K25	2CCG000421R0001	1	0.115	10
	30	32	509910	S401P-K32	2CCG000422R0001	1	0.115	10
	30	40	509927	S401P-K40	2CCG000423R0001	1	0.115	10
	20	50	509934	S401P-K50	2CCG000424R0001	1	0.115	10
	20	63	509941	S401P-K63	2CCG000425R0001	1	0.115	10
S402P	40	2	510091	S402P-K2	2CCG000441R0001	2	0.230	5
	40	3	510107	S402P-K3	2CCG000443R0001	2	0.230	5
	40	4	510114	S402P-K4	2CCG000444R0001	2	0.230	5
	40	6	510121	S402P-K6	2CCG000445R0001	2	0.230	5
	40	8	510138	S402P-K8	2CCG000446R0001	2	0.230	5
	40	10	510145	S402P-K10	2CCG000447R0001	2	0.230	5
	40	13	510152	S402P-K13	2CCG000448R0001	2	0.230	5
	40	16	510169	S402P-K16	2CCG000449R0001	2	0.230	5
	30	20	510176	S402P-K20	2CCG000450R0001	2	0.230	5
	30	25	510183	S402P-K25	2CCG000451R0001	2	0.230	5
	30	32	510190	S402P-K32	2CCG000452R0001	2	0.230	5
	30	40	510206	S402P-K40	2CCG000454R0001	2	0.230	5
	20	50	510213	S402P-K50	2CCG000455R0001	2	0.230	5
	20	63	510220	S402P-K63	2CCG000456R0001	2	0.230	5
S403P	40	2	510237	S403P-K2	2CCG000457R0001	3	0.345	4
	40	3	510244	S403P-K3	2CCG000458R0001	3	0.345	4
	40	4	510251	S403P-K4	2CCG000459R0001	3	0.345	4
	40	6	510268	S403P-K6	2CCG000460R0001	3	0.345	4
	40	8	510275	S403P-K8	2CCG000461R0001	3	0.345	4
	40	10	510282	S403P-K10	2CCG000462R0001	3	0.345	4
	40	13	510299	S403P-K13	2CCG000463R0001	3	0.345	4
	40	16	510305	S403P-K16	2CCG000465R0001	3	0.345	4
	30	20	510312	S403P-K20	2CCG000466R0001	3	0.345	4
	30	25	510329	S403P-K25	2CCG000467R0001	3	0.345	4
	30	32	510336	S403P-K32	2CCG000468R0001	3	0.345	4
	30	40	510343	S403P-K40	2CCG000469R0001	3	0.345	4
	20	50	510350	S403P-K50	2CCG000470R0001	3	0.345	4
	20	63	510367	S403P-K63	2CCG000471R0001	3	0.345	4

Ordering details for auxiliary switch and signal contacts on page 49–50

Miniature circuit breaker (MCB) for IEC

S400P series, I_{cu} = 40 … 20 kA B characteristic, with protected neutral

K according to IEC/EN 60947-2

	I_{cu}	I_n	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
	[kA]	[A]	EAN	Type code	Order code		kg	pc.
S402P	40	2	508555	S401P-B2NP	2CCG000420R0001	2	0.230	5
	40	3	508562	S401P-B3NP	2CCG000431R0001	2	0.230	5
	40	4	508579	S401P-B4NP	2CCG000442R0001	2	0.230	5
	40	6	508586	S401P-B6NP	2CCG000453R0001	2	0.230	5
	40	8	508593	S401P-B8NP	2CCG000464R0001	2	0.230	5
	40	10	508609	S401P-B10NP	2CCG000476R0001	2	0.230	5
	40	13	508616	S401P-B13NP	2CCG000487R0001	2	0.230	5
	40	16	508623	S401P-B16NP	2CCG000489R0001	2	0.230	5
	30	20	508630	S401P-B20NP	2CCG000490R0001	2	0.230	5
	30	25	508647	S401P-B25NP	2CCG000491R0001	2	0.230	5
	30	32	508654	S401P-B32NP	2CCG000492R0001	2	0.230	5
	30	40	508661	S401P-B40NP	2CCG000493R0001	2	0.230	5
	20	50	508678	S401P-B50NP	2CCG000494R0001	2	0.230	5
	20	63	508685	S401P-B63NP	2CCG000495R0001	2	0.230	5
S404P	40	2	508975	S403P-B2NP	2CCG000527R0001	4	0.460	2
	40	3	508982	S403P-B3NP	2CCG000528R0001	4	0.460	2
	40	4	508999	S403P-B4NP	2CCG000529R0001	4	0.460	2
	40	6	509002	S403P-B6NP	2CCG000531R0001	4	0.460	2
	40	8	509019	S403P-B8NP	2CCG000532R0001	4	0.460	2
	40	10	509026	S403P-B10NP	2CCG000533R0001	4	0.460	2
	40	13	509033	S403P-B13NP	2CCG000534R0001	4	0.460	2
	40	16	509040	S403P-B16NP	2CCG000535R0001	4	0.460	2
	30	20	509057	S403P-B20NP	2CCG000536R0001	4	0.460	2
	30	25	509064	S403P-B25NP	2CCG000537R0001	4	0.460	2
	30	32	509071	S403P-B32NP	2CCG000538R0001	4	0.460	2
	30	40	509088	S403P-B40NP	2CCG000539R0001	4	0.460	2
	20	50	509095	S403P-B50NP	2CCG000540R0001	4	0.460	2
	20	63	509101	S403P-B63NP	2CCG000542R0001	4	0.460	2

Ordering details for auxiliary switch and signal contacts on page 49–50

Miniature circuit breaker (MCB) for IEC

S 400 P series, I_{cu} = 40 … 20 kA C characteristic, with protected neutral

C according to IEC/EN 60947-2

	I_{cu}	I_n	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
	[kA]	[A]	EAN	Type code	Order code		kg	pc.
S402P	40	2	509255	S401P-C2NP	2CCG000558R0001	2	0.230	5
	40	3	509262	S401P-C3NP	2CCG000559R0001	2	0.230	5
	40	4	509279	S401P-C4NP	2CCG000560R0001	2	0.230	5
	40	6	509286	S401P-C6NP	2CCG000561R0001	2	0.230	5
	40	8	509293	S401P-C8NP	2CCG000562R0001	2	0.230	5
	40	10	509309	S401P-C10NP	2CCG000564R0001	2	0.230	5
	40	13	509316	S401P-C13NP	2CCG000565R0001	2	0.230	5
	40	16	509323	S401P-C16NP	2CCG000566R0001	2	0.230	5
	30	20	509330	S401P-C20NP	2CCG000567R0001	2	0.230	5
	30	25	509347	S401P-C25NP	2CCG000568R0001	2	0.230	5
	30	32	509354	S401P-C32NP	2CCG000569R0001	2	0.230	5
	30	40	509361	S401P-C40NP	2CCG000570R0001	2	0.230	5
	20	50	509378	S401P-C50NP	2CCG000571R0001	2	0.230	5
	20	63	509385	S401P-C63NP	2CCG000572R0001	2	0.230	5
S404P	40	2	509675	S403P-C2NP	2CCG000395R0001	4	0.460	2
	40	3	509682	S403P-C3NP	2CCG000396R0001	4	0.460	2
	40	4	509699	S403P-C4NP	2CCG000397R0001	4	0.460	2
	40	6	509705	S403P-C6NP	2CCG000399R0001	4	0.460	2
	40	8	509712	S403P-C8NP	2CCG000400R0001	4	0.460	2
	40	10	509729	S403P-C10NP	2CCG000401R0001	4	0.460	2
	40	13	509736	S403P-C13NP	2CCG000402R0001	4	0.460	2
	40	16	509743	S403P-C16NP	2CCG000403R0001	4	0.460	2
	30	20	509750	S403P-C20NP	2CCG000404R0001	4	0.460	2
	30	25	509767	S403P-C25NP	2CCG000405R0001	4	0.460	2
	30	32	509774	S403P-C32NP	2CCG000406R0001	4	0.460	2
	30	40	509781	S403P-C40NP	2CCG000407R0001	4	0.460	2
	20	50	509798	S403P-C50NP	2CCG000408R0001	4	0.460	2
	20	63	509804	S403P-C63NP	2CCG000410R0001	4	0.460	2

Ordering details for auxiliary switch and signal contacts on page 49–50

Miniature circuit breaker (MCB) for IEC

S400P series, I_{cu} = 40 … 20 kA K characteristic, with protected neutral

K according to IEC/EN 60947-2

	I_{cu}	I_n	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
	[kA]	[A]	EAN	Type code	Order code		kg	pc.
S402P	40	2	509958	S401P-K2NP	2CCG000426R0001	2	0.230	5
	40	3	509965	S401P-K3NP	2CCG000427R0001	2	0.230	5
	40	4	509972	S401P-K4NP	2CCG000428R0001	2	0.230	5
	40	6	509989	S401P-K6NP	2CCG000429R0001	2	0.230	5
	40	8	509996	S401P-K8NP	2CCG000430R0001	2	0.230	5
	40	10	510008	S401P-K10NP	2CCG000432R0001	2	0.230	5
	40	13	510015	S401P-K13NP	2CCG000433R0001	2	0.230	5
	40	16	510022	S401P-K16NP	2CCG000434R0001	2	0.230	5
	30	20	510039	S401P-K20NP	2CCG000435R0001	2	0.230	5
	30	25	510046	S401P-K25NP	2CCG000436R0001	2	0.230	5
	30	32	510053	S401P-K32NP	2CCG000437R0001	2	0.230	5
	30	40	510060	S401P-K40NP	2CCG000438R0001	2	0.230	5
	20	50	510077	S401P-K50NP	2CCG000439R0001	2	0.230	5
	20	63	510084	S401P-K63NP	2CCG000440R0001	2	0.230	5
S404P	40	2	510374	S403P-K2NP	2CCG000472R0001	4	0.460	2
	40	3	510381	S403P-K3NP	2CCG000473R0001	4	0.460	2
	40	4	510398	S403P-K4NP	2CCG000474R0001	4	0.460	2
	40	6	510404	S403P-K6NP	2CCG000477R0001	4	0.460	2
	40	8	510411	S403P-K8NP	2CCG000478R0001	4	0.460	2
	40	10	510428	S403P-K10NP	2CCG000479R0001	4	0.460	2
	40	13	510435	S403P-K13NP	2CCG000480R0001	4	0.460	2
	40	16	510442	S403P-K16NP	2CCG000481R0001	4	0.460	2
	30	20	510459	S403P-K20NP	2CCG000482R0001	4	0.460	2
	30	25	510466	S403P-K25NP	2CCG000483R0001	4	0.460	2
	30	32	510473	S403P-K32NP	2CCG000484R0001	4	0.460	2
	30	40	510480	S403P-K40NP	2CCG000485R0001	4	0.460	2
	20	50	510497	S403P-K50NP	2CCG000486R0001	4	0.460	2
	20	63	510503	S403P-K63NP	2CCG000488R0001	4	0.460	2

Ordering details for auxiliary switch and signal contacts on page 49–50

Miniature circuit breaker (MCB) for UL489

SUP 400 series technical features

				SUP400M
General data	Standards			UL 489 CSA 22.2 No. 5
	Number of poles			1P, 2P, 3P
	Tripping characteristics			C, K
	Rated Current I_n		A	2 … 40 A
	Rated frequency f		Hz	50 / 60 Hz
	Rated Insulation voltage U_i acc. to IEC/EN 60664-1		V	440 V AC (240/415 VAC) 500 V AC (277/480 V AC)
	Overvoltage category			III
	Pollution degree			3 (240/415 V AC) 2 (277/480 VAC)
Data acc. to IEC/EN 60947-2	Rated operational voltage U_e		V	1P, 1P+NP: 240 V AC, 277 V AC 2P, 3P, 3P+NP: 240/415 V AC, 277/480 V AC
	Max. power frequency recovery voltage (U_{max})		V	
	Min. operating voltage		V	12 V AC - 12 V DC
	Rated ultimate short-circuit breaking capacity I_{cu}		kA	40 kA (2 ... 16 A, 240/415 V AC) 30 kA (20 ... 40 A, 240/415 V AC) 20 kA (50 … 63 A, 240/415 V AC) 20 kA (2 ... 16 A, 277/480 V AC) 15 kA (20 ... 40 A, 277/480 V AC) 5 kA (50 … 63 A, 277/480 V AC)
	Rated service short-circuit breaking capacity I_{cs}		kA	20 kA (2 ... 16 A, 240/415 V AC) 15 kA (20 ... 40 A, 240/415 V AC) 7.5 kA (50 …. 63 A, 240/415 V AC) 40 kA (2 ... 16 A, 277/480 V AC) 5 kA (20 ... 40 A, 277/480 V AC) 2.5 kA (50 … 63 A, 277/480 V AC)
	Rated impulse withstand voltage U_{imp}. (1.2/50 µs)		kV	4 kV
	Dielectric test voltage at ind. freq. for 1 min.		kV	
	Reference temperature for tripping characteristics		°C	40°C
	Electrical endurance		cycles (OFF-ON-OFF)	10 000 ops
Data acc. to UL 489 / CSA 22.2 No. 5	Rated voltage		V	1P: 60 V DC, 277 V AC 2P: 125 V DC, 480Y/277 V AC 3P: 480Y/277 V AC
	Application			
	Reference temperature for tripping characteristics		°C	40°C
	Electrical endurance		cycles (OFF-ON-OFF)	10 000 ops
Mechanical data	Housing			Insulation group I, light grey
	Toggle			Insulation group II, black, sealable
	Mechanical endurance		cycles (OFF-ON-OFF)	20 000 ops
	Contact position indication (CPI)			green OFF / red ON
	Protecion degree acc. to EN 60529			IP20, IP40 in enclosure with cover
	Shock resistance acc. to IEC/EN 61373			Category 1, Class B
	Shock resistance acc. to IEC/EN 60068-2-27 (Test Ea)			5 g / 30 ms
	Vibration resistance acc. to IEC/EN 60068-2-6 (Test Fc)			5…13.2 Hz / 1 mm 13.2 …100 Hz / 0.7 g with load 80% x Ie
	Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30		°C / RH	28 cycles with 55 °C / 90…96% and 25 °C / 95…100%
	Ambient temperature		°C	-40 … +70°C
	Storage temperature		°C	-40 … +70°C

				SUP400M
Installation	Terminal type			Failsafe bi-directional cylinder-lift terminal (shock protected) with double slot 35/10 mm²
	Cross-section of conductors (top/bottom)	Solid/ Stranded	mm²	Single: 0.75 ÷ 35 mm² (front slot), 0.75 ÷ 6 mm² (rear slot) Multiple: 2x 0.75 ÷ 10 mm² (front slot), 2x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size
		Flexible	mm²	Single: 0.75 ÷ 25 mm² (front side), 0.75 ÷ 6 mm² (rear slot) Multiple: 2x 0.75 ÷ 10 mm² (front slot), 2x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size
			AWG	AWG 14 ... 8
	Cross-section of busbars (top/bottom)		mm²	
			AWG	
	Tightening torque		Nm	2.8 Nm
			in-lbs	
	Wire stripping length		mm	12.5 mm
	Screwdriver			No. 2 Pozidrive
	Mounting			SMISSLINE TP busbars system only
	Mounting position			Any
	Supply			Any
Dimensions and weight	Mounting dimensions acc. to DIN 43880			
	Pole dimensions (H x D x W)		mm	100 x 18 x 82mm
	Pole weight		g	Approx. 120 g
Combination with auxiliary elements	Auxiliary contact			yes
	Auxiliary/Signal contact			No
	Bottom fitting auxiliary contact			No
	Shunt trip			No
	Undervoltage release			No
	Overvoltage release			No
	Motor Operating Device			No
	Autoreclosing Unit			No

Miniature circuit breaker (MCB) for UL489

SUP400 C for branch circuit protection acc. to UL489
File E312425

Ordering Data

Number of poles	Rated current I_n	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	A	EAN	Type code	Order code		kg	pc.
1	2	1520809	SUP401M-C2	2CCG001611R0001		0.120	10
	3	1520816	SUP401M-C3	2CCG001612R0001		0.120	10
	4	1520823	SUP401M-C4	2CCG001613R0001		0.120	10
	5	1520830	SUP401M-C5	2CCG001614R0001		0.120	10
	6	1520847	SUP401M-C6	2CCG001615R0001		0.120	10
	8	1520854	SUP401M-C8	2CCG001616R0001		0.120	10
	10	1520861	SUP401M-C10	2CCG001617R0001		0.120	10
	13	1520878	SUP401M-C13	2CCG001618R0001		0.120	10
	15	1520885	SUP401M-C15	2CCG001619R0001		0.120	10
	16	1520892	SUP401M-C16	2CCG001620R0001		0.120	10
	20	1520908	SUP401M-C20	2CCG001621R0001		0.120	10
	25	1520915	SUP401M-C25	2CCG001622R0001		0.120	10
	30	1520922	SUP401M-C30	2CCG001623R0001		0.120	10
	35	1520939	SUP401M-C35	2CCG001624R0001		0.120	10
	40	1520731	SUP401M-C40	2CCG001604R0001		0.120	10

Ordering Data

Number of poles	Rated current I_n	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	A	EAN	Type code	Order code		kg	pc.
2	2	1520953	SUP402M-C2	2CCG001626R0001		0.240	5
	3	1520960	SUP402M-C3	2CCG001627R0001		0.240	5
	4	1520977	SUP402M-C4	2CCG001628R0001		0.240	5
	5	1520984	SUP402M-C5	2CCG001629R0001		0.240	5
	6	1520991	SUP402M-C6	2CCG001630R0001		0.240	5
	8	1521004	SUP402M-C8	2CCG001631R0001		0.240	5
	10	1521011	SUP402M-C10	2CCG001632R0001		0.240	5
	13	1521028	SUP402M-C13	2CCG001633R0001		0.240	5
	15	1521035	SUP402M-C15	2CCG001634R0001		0.240	5
	16	1521042	SUP402M-C16	2CCG001635R0001		0.240	5
	20	1521059	SUP402M-C20	2CCG001636R0001		0.240	5
	25	1521066	SUP402M-C25	2CCG001637R0001		0.240	5
	30	1521073	SUP402M-C30	2CCG001638R0001		0.240	5
	35	1521080	SUP402M-C35	2CCG001639R0001		0.240	5
	40	1520748	SUP402M-C40	2CCG001605R0001		0.240	5
3	2	1521103	SUP403M-C2	2CCG001641R0001		0.360	3
	3	1521110	SUP403M-C3	2CCG001642R0001		0.360	3
	4	1521127	SUP403M-C4	2CCG001643R0001		0.360	3
	5	1521134	SUP403M-C5	2CCG001644R0001		0.360	3
	6	1521141	SUP403M-C6	2CCG001645R0001		0.360	3
	8	1521158	SUP403M-C8	2CCG001646R0001		0.360	3
	10	1521165	SUP403M-C10	2CCG001647R0001		0.360	3
	13	1521172	SUP403M-C13	2CCG001648R0001		0.360	3
	15	1521189	SUP403M-C15	2CCG001649R0001		0.360	3
	16	1521196	SUP403M-C16	2CCG001650R0001		0.360	3
	20	1521202	SUP403M-C20	2CCG001651R0001		0.360	3
	25	1521219	SUP403M-C25	2CCG001652R0001		0.360	3
	30	1521226	SUP403M-C30	2CCG001653R0001		0.360	3
	35	1521233	SUP403M-C35	2CCG001654R0001		0.360	3
	40	1520755	SUP403M-C40	2CCG001606R0001		0.360	3

Miniature circuit breaker (MCB) for UL489

SUP400 K for branch circuit protection acc. to UL489
File E312425

Ordering Data

Number of poles	Rated current I_n	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	A	EAN	Type code	Order code		kg	pc.
1	2	1506759	SUP401M-K2	2CCG000142R0001		0.120	10
	3	1506766	SUP401M-K3	2CCG000143R0001		0.120	10
	4	1506773	SUP401M-K4	2CCG000144R0001		0.120	10
	5	1506865	SUP401M-K5	2CCG000153R0001		0.120	10
	6	1506780	SUP401M-K6	2CCG000145R0001		0.120	10
	8	1506797	SUP401M-K8	2CCG000146R0001		0.120	10
	10	1506803	SUP401M-K10	2CCG000147R0001		0.120	10
	13	1506810	SUP401M-K13	2CCG000148R0001		0.120	10
	15	1506872	SUP401M-K15	2CCG000154R0001		0.120	10
	16	1506827	SUP401M-K16	2CCG000149R0001		0.120	10
	20	1506834	SUP401M-K20	2CCG000150R0001		0.120	10
	25	1506841	SUP401M-K25	2CCG000151R0001		0.120	10
	30	1506858	SUP401M-K30	2CCG000152R0001		0.120	10
	35	1516109	SUP401M-K35	2CCG001141R0001		0.120	10

Ordering Data

Number of poles	Rated current I_n	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	A	EAN	Type code	Order code		kg	pc.
2	2	1506384	SUP402M-K2	2CCG000106R0001		0.240	5
	3	1506391	SUP402M-K3	2CCG000107R0001		0.240	5
	4	1506506	SUP402M-K4	2CCG000108R0001		0.240	5
	5	1506599	SUP402M-K5	2CCG000117R0001		0.240	5
	6	1506513	SUP402M-K6	2CCG000109R0001		0.240	5
	8	1506520	SUP402M-K8	2CCG000110R0001		0.240	5
	10	1506537	SUP402M-K10	2CCG000111R0001		0.240	5
	13	1506544	SUP402M-K13	2CCG000112R0001		0.240	5
	15	1506605	SUP402M-K15	2CCG000118R0001		0.240	5
	16	1506551	SUP402M-K16	2CCG000113R0001		0.240	5
	20	1506568	SUP402M-K20	2CCG000114R0001		0.240	5
	25	1506575	SUP402M-K25	2CCG000115R0001		0.240	5
	30	1506582	SUP402M-K30	2CCG000116R0001		0.240	5
	35	1516116	SUP402M-K35	2CCG001142R0001		0.240	5
3	2	1506612	SUP403M-K2	2CCG000119R0001		0.360	3
	3	1506629	SUP403M-K3	2CCG000120R0001		0.360	3
	4	1506636	SUP403M-K4	2CCG000121R0001		0.360	3
	5	1506728	SUP403M-K5	2CCG000130R0001		0.360	3
	6	1506643	SUP403M-K6	2CCG000122R0001		0.360	3
	8	1506650	SUP403M-K8	2CCG000123R0001		0.360	3
	10	1506667	SUP403M-K10	2CCG000124R0001		0.360	3
	13	1506674	SUP403M-K13	2CCG000125R0001		0.360	3
	15	1506735	SUP403M-K15	2CCG000131R0001		0.360	3
	16	1506681	SUP403M-K16	2CCG000126R0001		0.360	3
	20	1506698	SUP403M-K20	2CCG000127R0001		0.360	3
	25	1506704	SUP403M-K25	2CCG000128R0001		0.360	3
	30	1506711	SUP403M-K30	2CCG000129R0001		0.360	3
	35	1516123	SUP403M-K35	2CCG001143R0001		0.360	3

Residual current operated circuit breaker
Type A

Bi-directional cylindrical terminal ensure higher safety of connecting operations, making them easier.

Contact position indicator (CPI): to always know the status of the contacts (red: closed contacts; green: open contacts) independently on the toggle position.

Test pushbutton to verify the correct functioning of the device.

Information on the device are laser printed to make them clearly visible and long lasting.

Plug contacts can be moved easily between L1, L2 and L3. Capacities, e.g. of battery systems, can be fully utilized. A different arrangement can be set up quickly and easily. Inspection glass with phase indicator on the front of the device.

Residual current operated circuit breaker RCCBs

F402 technical features, A type and APR-F (K type)

	F402	F402 APR
Standards	IEC/EN 61008-1 IEC/EN 61008-2-1	IEC/EN 61008-1 IEC/EN 61008-2-1 IEC/EN 62423
Electrical features		
Type (wave form of the earth leakage sensed)	A	APR - F
Number of poles	1P + N	1P + N
Rated current I_n	25, 40 A	40 A
Rated sensitivity $I_{\Delta n}$	0.01, 0.03, 0.1 A	0.03 A
Rated voltage U_e	230 V	230/400 V
Rated insulation voltage (U_i)	500 V	500 V
Overvoltage category	III	III
Pollution degree	2	2
Operating voltage of circuit test	110 V (170 for 30 mA) – 254 V	170 – 254 V
Rated frequency	50/60 Hz	50/60 Hz
Rated conditional short-circuit current I_{nc}	10 kA with SCPD - fuse gG 100 A or high performance MCB S800 100 A	
Rated residual breaking capacity $I_{\Delta m}$	1 kA	
Surge current resistance (wave 8/20)	N/A	3000 A
Mechanical features		
Housing	Light grey RAL 7035	Light grey RAL 7035
Toggle	Blue RAL 5015, sealable in ON-OFF positions	Blue RAL 5015, sealable in ON-OFF positions
Contact position indication	Green/Red Window	Green/Red Window
Endurance	Electrical endurance: 10000 cycles (OFF-ON-OFF) Mechanical endurance: 10000 cycles (OFF-ON-OFF)	Electrical endurance: 10000 cycles (OFF-ON-OFF) Mechanical endurance: 10000 cycles (OFF-ON-OFF)
IP code	IP20, IP40 in enclosure with cover	IP20, IP40 in enclosure with cover
Shock resistance acc. to IEC/EN 61373	Category 1, Class B	Category 1, Class B
Vibration resistance acc. to	2 ... 13.2 Hz/1 mm	2 ... 13.2 Hz/1 mm
IEC/EN 60068-2-6 (Test Fc)	13.2 ... 100 Hz/0.7 g, 5 cycles	13.2 ... 100 Hz/0.7 g, 5 cycles
	5 ... 150 ... 5 Hz/1 g, 4 waves	5 ... 150 ... 5 Hz/1 g, 4 waves
Environmental conditions (damp heat)	28 cycles with 55 °C/90...96 % and 25 °C/95...100 %	
acc. to IEC/EN 60068-2-30		
Ambient temperature	–25 ... +55 °C	–25 ... +55 °C
Storage temperature	–40 ... +70 °C	–40 ... +70 °C
Installation		
Terminal type	failsafe bi-directional cylinder-lift terminal (shock protected)	
Top terminal rigid IEC connections (solid/stranded)	Single: 0.75...25 mm2 (front slot), 0.75...10 mm2 (rear slot) Multiple: 2 x 0.75...10 mm² (front slot), 2 x 0.75...6 mm² (rear slot), with cables of same type and size	
Top terminal flexible IEC connections	Single: 0.75...16 mm² (front side), 0.75...6 mm² (rear slot) Multiple: 2 x 0.75...10 mm² (front slot), 2 x 0.75...6 mm² (rear slot), with cables of same type and size	

Residual current operated circuit breaker RCCBs

F404 technical features, A type and APR-F (K type)

	F404 A	F404 A-K	F404 S	F404 LF
Standards	IEC/EN 61008-1 IEC/EN 61008-2-1	IEC/EN 61008-1 IEC/EN 61008-2-1 IEC/EN 62423	IEC/EN 61008-1 IEC/EN 61008-2-1	IEC/EN 61008-1 IEC/EN 61008-2-1
Electrical features				
Type (wave form of the earth leakage sensed)	A	APR - F	A	A
Number of poles	3P + N	3P + N	3P + N	3P + N
Rated current I_n	25, 40, 63 A	40, 63 A	63 A	63 A
Rated sensitivity $I_{\Delta n}$	0.03, 0.1, 0.3 A	0.03–0.1 A	0.1, 0.3 A	0.03, 0.3 A
Rated voltage U_e	230/400 V	230/400 V	230/400 V	230/400 V
Rated insulation voltage (U_i)	500 V	500 V	500 V	500 V
Overvoltage category	III	III	III	III
Pollution degree	2	2	2	2
Operating voltage of circuit test	110 V (170 for 30 mA) – 254 V	110 V (170 for 30 mA) – 254 V	110 – 254 V	110 (170 for 30 mA) – 254 V
Rated frequency Hz	50/60 Hz	50/60 Hz	50/60 Hz	$16^2/_3$ Hz
Rated conditional short-circuit current I_{nc}	10 kA with SCPD – fuse gG 100 A or high performance MCB S800 100 A			
Rated residual breaking capacity $I_{\Delta m}$	1 kA	1 kA	1 kA	1 kA
Surge current resistance (wave 8/20)	N/A	3000 A	5000 A	N/A
Mechanical features				
Housing	Insulation group I, light grey RAL 7035	Insulation group I, light grey RAL 7035	Insulation group I, light grey RAL 7035	Insulation group I, light grey RAL 7035
Toggle	Insulation group II, blue RAL 5015, sealable in ON-OFF positions	Insulation group II, blue RAL 5015, sealable in ON-OFF positions	Insulation group II, blue RAL 5015, sealable in ON-OFF positions	Insulation group II, blue RAL 5015, sealable in ON-OFF positions
Contact position indication	Green/Red Window	Green/Red Window	Green/Red Window	Green/Red Window
Endurance	Electrical endurance: 10000 cycles (OFF-ON-OFF) Mechanical endurance: 10000 cycles (OFF-ON-OFF)	Electrical endurance: 10000 cycles (OFF-ON-OFF) Mechanical endurance: 10000 cycles (OFF-ON-OFF)	Electrical endurance: 10000 cycles (OFF-ON-OFF) Mechanical endurance: 10000 cycles (OFF-ON-OFF)	Electrical endurance: 10000 cycles (OFF-ON-OFF) Mechanical endurance: 10000 cycles (OFF-ON-OFF)
IP code	IP20, IP40 in enclosure with cover	IP20, IP40 in enclosure with cover	IP20, IP40 in enclosure with cover	IP20, IP40 in enclosure with cover
Shock resistance acc. to IEC/EN 61373	Category 1, Class B	Category 1, Class B	Category 1, Class B	Category 1, Class B
Vibration resistance acc. to IEC/EN 60068-2-6 (Test Fc)	2 ... 13.2 Hz/1 mm, 13.2 ... 100 Hz/0.7 g, 5 cycles, 5 ... 150 ... 5 Hz/1 g, 4 waves			
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	28 cycles with 55 °C/90 ... 96 % and 25 °C/95 ... 100 %			
Ambient temperature	–25 ... +55 °C	–25 ... +55 °C	–25 ... +55 °C	–25 ... +55 °C
Storage temperature	–40 ... +70 °C	–40 ... +70 °C	–40 ... +70 °C	–40 ... +70 °C
Installation				
Terminal type	failsafe bi-directional cylinder-lift terminal (shock protected)			
Top terminal rigid IEC connections (solid/stranded)	Single: 0.75...25 mm² (front slot), 0.75...10 mm² (rear slot) Multiple: 2 x 0.75...10 mm² (front slot), 2 x 0.75...6 mm² (rear slot), with cables of same type and size			
Top terminal flexible IEC connections	Single: 0.75...16 mm² (front side), 0.75...6 mm² (rear slot) Multiple: 2 x 0.75...10 mm² (front slot), 2 x 0.75...6 mm² (rear slot), with cables of same type and size			

Tripping time settings type A

Tripping time

Type	Rated sensitivity	Tripping time			
	Alternating current	$1 \times I_{\Delta n}$	$2 \times I_{\Delta n}$	$5 \times I_{\Delta n}$	500 A
	Pulsating current with DC components	$1{,}4 \times I_{\Delta n}$	$2 \times 1{,}4 \times I_{\Delta n}$	$5 \times 1{,}4 \times I_{\Delta n}$	500 A
	Detection of smooth DC currents	$2 \times I_{\Delta n}$	$2 \times 2 \times I_{\Delta n}$	$5 \times 2 \times I_{\Delta n}$	500 A
Standard or short time		max. 0,3 s	max. 0,15 s	max. 0,04 s	max. 0,04 s

Residual current operated circuit breaker RCCBs

F404 technical features, B type

	F404 B
Standards	IEC/EN 61008-1 IEC/EN 61008-2-1 IEC/EN 62423
Electrical features	
Type (wave form of the earth leakage sensed)	B
Number of poles	3P + N
Rated current I_n	25, 40, 63 A
Rated sensitivity $I_{\Delta n}$	0.03, 0.3 A
Rated voltage U_e	230/400 V
Rated insulation voltage (U_i)	500 V
Overvoltage category	III
Pollution degree	2
Operating voltage of circuit test	110 V (170 for 30 mA) – 254 V
Rated frequency	50/60 Hz
Rated conditional short-circuit current I_{nc}	10 kA with SCPD – fuse gG 100 A or high performance MCB S800 100 A
Rated residual breaking capacity $I_{\Delta m}$	1 kA
Surge current resistance (wave 8/20)	3000 A
Operating voltage of circuit test Ut IEC/EN	110 - 253 V AC 170 - 253 V AC (30 mA)
Maximum electronic consumption	1.2W
Mechanical features	
Housing	Light grey RAL 7035
Toggle	Blue RAL 5015, sealable in ON-OFF positions
Contact position indication	Green/Red Window
Electrical endurance	10000 cycles (OFF-ON-OFF)
Mechanical endurance	10000 cycles (OFF-ON-OFF)
IP code	IP20, IP40 in enclosure with cover
Shock resistance acc. to IEC/EN 61373	Category 1, Class B
Vibration resistance acc. to IEC/EN 60068-2-6 (Test Fc)	2 ... 13.2 Hz/1 mm 13.2 ... 100 Hz/0.7 g, 5 cycles 5 ... 150 ... 5 Hz/1 g, 4 waves
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	28 cycles with 55 °C/90 ... 96 % and 25 °C/95 ... 100 %
Ambient temperature	-25...+70 for system current <= 32 A -25...+65 for system current = 40 A -25...+50 for system current = 63 A
Storage temperature	–40 ... +70 °C
Installation	
Terminal type	failsafe bi-directional cylinder-lift terminal (shock protected)
Top terminal rigid IEC connections (solid/stranded)	Single: 0.75...25 mm² (front slot), 0.75...10 mm² (rear slot) Multiple: 2 x 0.75...10 mm² (front slot), 2 x 0.75...6 mm² (rear slot), with cables of same type and size
Top terminal flexible IEC connections	Single: 0.75...16 mm² (front side), 0.75...6 mm² (rear slot) Multiple: 2 x 0.75...10 mm² (front slot), 2 x 0.75...6 mm² (rear slot), with cables of same type and size

SMISSLINE TP plug-in system

RCCBs F400 series, A type

F402

F402 A type

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct (with IΔn = 30 mA) contacts.

Application: residential, commercial, industrial.

Standard: IEC/EN 61008

Marking: according to EN 61008

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 801254 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	10	25	2037033	F402 A 25/0.01	2CSF502110R0250		0.250	1
	30	25	2034339	F402 A 25/0.03	2CSF502110R1250		0.250	1
	30	40	2036937	F402 A 40/0.03	2CSF502110R1400		0.250	1
	100	40	2034230	F402 A 40/0.1	2CSF502110R2400		0.250	1

F404

F404 A type

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct (with IΔn = 30 mA) contacts. Product helpful where for installation habits, for wiring with busbars or cables, for special needs neutral on the left is needed.

Application: residential, commercial, industrial.

Standard: IEC/EN 61008

Marking: according to EN 61008

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 761227 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	0104253	F404 A 25/0.03	2CCF544110E0250		0.430	1
	30	40	0104260	F404 A 40/0.03	2CCF544110E0400		0.430	1
	100	40	0104277	F404 A 40/0.1	2CCF544120E0400		0.430	1
	300	40	0104284	F404 A 40/0.3	2CCF544130E0400		0.430	1
	30	63	0104291	F404 A 63/0.03	2CCF544110E0630		0.430	1
	100	63	0104307	F404 A 63/0.1	2CCF544120E0630		0.430	1
	300	63	0104314	F404 A 63/0.3	2CCF544130E0630		0.430	1

F404 A type $16^2/_3$ Hz

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contacts and additional protection against direct (with IΔn = 30 mA) contacts.

The RCCB F200 $16^2/_3$ Hz can work at rated frequency of $16^2/_3$ Hz which is common in railways applications

Application: railways

Standard: IEC/ EN 61008

Marking: according to EN 61008

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 761227 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	63	0104376	F404 A-LF 63/0.03	2CCF544110E0631		0.430	1
	300	63	0104383	F404 A-LF 63/0.3	2CCF544130E0631		0.430	1

SMISSLINE TP plug-in system

RCCB F404 series - B type for continuous, selective continuous type fault currents technical features

F 404 B

F404 B RCCBs provide additional protection against direct contact and are the right choice to ensure maximum system safety thanks to early detection of fault currents with continuous waveforms or high frequencies.

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 761227 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	25	1506285	F404B-25/0.03	2CCG000052R0001		0.435	1
4	30	40	1506292	F404B-40/0.03	2CCG000053R0001		0.435	1
4	30	63	1506308	F404B-63/0.03	2CCG000054R0001		0.435	1
4	300	25	1506315	F404B-25/0.3	2CCG000055R0001		0.435	1
4	300	40	1506322	F404B-40/0.3	2CCG000056R0001		0.435	1
4	300	63	1506339	F404B-63/0.3	2CCG000057R0001		0.435	1

SMISSLINE TP plug-in system

RCCBs F400 series, A K type

F402

F402 A K type, short-time delayed
Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing the best compromise between safety and continuity in the service thanks to the resistance to unwanted trippings; protection against indirect contacts and additional protection against direct (IΔn = 30 mA) contacts.
Application: residential, commercial, industrial.
Standard: IEC/EN 61008
Surge current resistance (wave 8/20) = 3000 A
Marking: according to EN 61008

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 801254 EAN	Order details Type code	Order details Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
2	30	40	2036838	F402 A-K 40/0.03	2CSF502410R1400		0.250	1

SMISSLINE TP plug-in system

RCCBs F400 series, A K type

FS 404 K and S

F404 A K type, short-time delayed

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing the best compromise between safety and continuity in the service thanks to the resistance to unwanted trippings; protection against indirect contacts and additional protection against direct (IΔn = 30 mA) contacts.

Application: residential, commercial, industrial.

Standard: IEC/EN 61008

Surge current resistance (wave 8/20) = 3000 A

Marking: according to EN 61008

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 761227 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	30	40	0104321	F404 A-K 40/0.03	2CCF544310E0400		0.430	1
	100	40	0104338	F404 A-K 40/0.1	2CCF544320E0400		0.430	1
	30	63	0104345	F404 A-K 63/0.03	2CCF544310E0630		0.430	1

F404 A selective type

Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents with an intentional tripping delay, which permits to realize the selectivity with downstream instantaneous devices (for more information about selectivity see the technical guide); protection against indirect contacts.

Application: commercial, industrial.

Standard: IEC/EN 61008

Surge current resistance (wave 8/20)=5000 A

Marking: according to EN 61008

Number of poles	Rated residual current IΔn mA	Rated current In A	Bbn 761227 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
4	100	63	0104352	F404 A-S 63/0.1	2CCF544220E0630		0.430	1
	300	63	0104369	F404 A-S 63/0.3	2CCF544230E0630		0.430	1

Residual current operated circuit breaker (RCBO)
The difference lies in the detail

Residual current operated circuit breakers with overcurrent protection (RCBO)
The SMISSLINE residual current operated circuit breakers with overcurrent protection (RCBO) are ideal for protecting people and property in all new and existing distribution systems. The combination of standby current and cable protection in one single device greatly simplifies planning and offers cost benefits. Using a RCBO can e.g. satisfy the minimum level of protection required by regulations in an apartment or in a particular distribution system. Should a residual current arise, only the circuit directly affected is switched off while all other circuits remain in operation.
The short time-delayed residual current operated circuit breaker with overcurrent protection FS401 K is a version particularly suited to unfavourable distribution and load situations. Without limiting the personal protection function in any way, the electronic short time delay prevents nuisance tripping which may arise as a result of capacitive discharge currents.

Type F RCBOs have a minimum non-tripping time of 10 ms and a surge current withstand capacity (resistance against accidental tripping) of 3 kA. The standard functionality is not impaired by overlapping smooth DC residual currents of up to 10 mA. When using Type F RCBOs with short-time delay, there is no risk of false tripping due to (capacitive) currents flowing to ground for short periods.

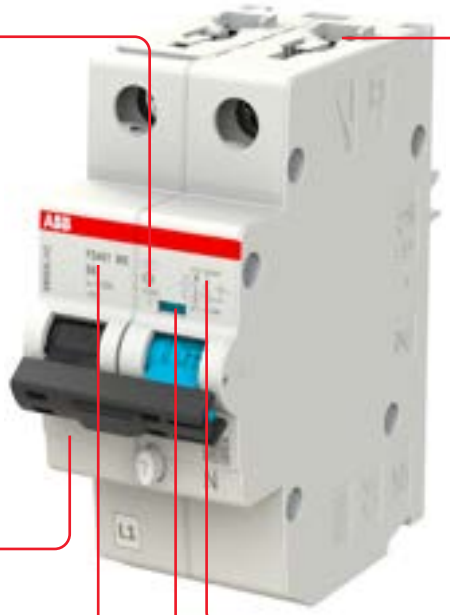

New, patented bidirectional terminal with captive screws for maximum comfort, safety and flexibility.
The connection takes place in two chambers (35 mm^2 and 10 mm^2).
Two conductors with the same cross-section can be connected in each chamber.

Reliable recognition of the switching status through the new red/green position indicating device that shows the position of the inner contacts.

Laser printing for clearly legible information during the entire service life.

Short-circuit breaking capacity of 10 kA to 32 A according to EN/IEC 61009-1
Rated breaking capacity I_{cu} kA
6…16 A and 15 kA 20…32 A acc. to IEC/EN 60947-2.

Differential Trip Indicator (DTI)
The latest RCBO version FS400 of the SMISSLINE range will include an earth fault indicator window. This is to indicate the differential tripping to immediately identify any earth fault (cannot be activated in case of manual operation). The additional indication window for this function is place over the handle.

Residual current operated circuit breaker (RCBO)
Features

Contact position indication
All SMISSLINE TP RCBO
are suited with a contact position indication (CPI) on the toggle. You can easily identify, if the RCBO is in the ON or the OFF position – easy and safe maintenance work is possible.
The green/red window indicates the real position of the contacts independently of the toggle position.

Earth fault indicator (DTI)
The latest RCBO version FS401, FS403 and FS402 of the SMISSLINE range now includes an earth fault indicator window. This is to indicate the differential tripping to immediately identify any earth fault (cannot be activated in case of manual operation). There is a separate window over the toggle to identify earth fault trips. Blue windows identify earth fault trips.

QR-Code
The QR-Code will give you direct access to all product related data, certificates and documents.

IP 20 - finger safe terminals
SMISSLINE RCBO are equipped with 25 mm² + 6 mm² cylinder lift twin terminals, a well proven and reliable technology - designed for sopisticated industrial use.

Linie indication
Pole conductor indicator changes when the contact is moved to the rear of the device

Laser printing
All printings of the FS400, like the approvals on the dome and the product identification, are printed by a laser. The laser printing ensures a friction, scratch and solvent resistant marking on the RCBO.
Easy identification of the products in case of maintenance or replacements due to safe laser printing

SMISSLINE TP plug-in system

Residual current operated circuit breaker (RCBO)

FS401 technical features

		FS401E	FS401M	FS401MK
Standards		IEC/EN 61009-1, IEC/EN 61009-2-1	IEC/EN 61009-1, IEC/EN 61009-2-1	IEC/EN 61009-1, IEC/EN 61009-2-1 IEC/EN 62423
Electrical features				
type (wave form of the earth leakage sensed)		A	A	APR - F
Number of poles		1P + N	1P + N	1P + N
Rated current I_n		6 ≤ I_n ≤ 32 A	6 ≤ I_n ≤ 32 A	6 ≤ I_n ≤ 32 A
Rated sensitivity $I_{\Delta n}$		0.03 A	0.03–0.1 A	0.03–0.3 A
Rated voltage U_e		240 V	240 V	240 V
Insulation voltage U_i		500 V	500 V	500 V
Overvoltage category		III	III	III
Pollution degree		2	2	2
Operating voltage of circuit test		110 V (170 for 30 mA) – 264V	110 V (170 for 30 mA) – 264V	110 V (170 for 30 mA) – 264V
Rated frequency		50/60 Hz	50/60 Hz	50/60 Hz
Rated breaking capacity		6000 A	10000 A	10000 A
Rated breaking capacity acc. to IEC/EN 60947-2 (only referring to short circuit test)	ultimate I_{cu} kA 6…16 A		25	25
	ultimate I_{cu} kA 20…32 A		15	15
	service I_{cs} kA 6…16 A		15	15
	service I_{cs} kA 20…32 A		7.5	7.5
Rated residual breaking capacity acc. to IEC/EN 61009-1 $I_{\Delta m}$		6000 A	10000 A	10000 A
Rated impulse withstand voltage (1.2/50) U_{imp}		4 kV	4 kV	4 kV
Dielectric test voltage at ind. freq. for 1 min.		2.5 kV (50/60 Hz, 1 min.)	2.5 kV (50/60 Hz, 1 min.)	2.5 kV (50/60 Hz, 1 min.)
Thermomagnetic release – characteristic	B: 3 I_n ≤ I_n ≤ 5 I_n	X	X	X
	C: 5 I_n ≤ I_n ≤ 10 I_n	X	X	X
Grid distance		35 mm	35 mm	35 mm
Energy limiting class acc. to EN 61009-1		3	3	3

Mechanical features			
Housing	Insulation group I, light grey RAL 7035	Insulation group I, light grey RAL 7035	Insulation group I, light grey RAL 7035
Toggle	Insulation group II, black RAL 9005, sealable in ON-OFF positions	Insulation group II, black RAL 9005, sealable in ON-OFF positions	Insulation group II, black RAL 9005, sealable in ON-OFF positions
Earth fault indicator (DTI)	Light grey/blue Window	Light grey/blue Window	Light grey/blue Window
Contact position indication	Green/Red Window	Green/Red Window	Green/Red Window
Endurance	Electrical endurance: 10000 ops Mechanical endurance: 20000 ops		
IP code	IP20, IP40 in enclosure with cover	IP20, IP40 in enclosure with cover	IP20, IP40 in enclosure with cover
Shock resistance acc. to IEC/EN 61373	Category 1, Class B	Category 1, Class B	Category 1, Class B
Shock resistance acc. to IEC/EN 60068-2-27 (Test Ea)	5g / 30ms	5g / 30ms	5g / 30ms
Vibration resistance acc. to IEC/EN 60068-2-6 (Test Fc)	5…13.2 Hz / 1 mm 13.2 …100 Hz / 0.7 g with load 80% x I_n	5…13.2 Hz / 1 mm 13.2 …100 Hz / 0.7 g with load 80% x I_n	5…13.2 Hz / 1 mm 13.2 …100 Hz / 0.7 g with load 80% x I_n
Reference temperature for setting of thermal element	30 °C	30 °C	30 °C
Ambient temperature	–25…+60 °C	–25…+60 °C	–25…+60 °C
Storage temperature	–40…+70 °C	–40…+70 °C	–40…+70 °C

Installation	
Terminal type	failsafe bi-directional cylinder-lift terminal (shock protected)
Top terminal rigid IEC connections (solid/stranded)	Single: 0.75 ÷ 35 mm² (front slot), 0.75 ÷ 10 mm² (rear slot) Multiple: 2 x 0.75 ÷ 10 mm² (front slot), 2 x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size
Top terminal flexible IEC connections	Single: 0.75 ÷ 25 mm² (front side), 0.75 ÷ 6 mm² (rear slot) Multiple: 2 x 0.75 ÷ 10 mm² (front slot), 2 x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size

SMISSLINE TP plug-in system

RCBOs FS401 series 10 000-6000 A type

FS 401 M

FS401E A type, B and C characteristic

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn=30 mA).

Application: residential, commercial, industrial.

Standard: IEC/EN 61009, Icn = 6 kA, Icn =10 kA

B, 6 kA according to EN 61009-1

$I_{\Delta n}$	I_n	I_{cn}	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
[mA]	[A]	[kA]	EAN	Type code	Order code		kg	pc.
30	10	6	1521257	FS401E-B10/0.03	2CCG001656R0001	2	0.2	1
30	13	6	1521264	FS401E-B13/0.03	2CCG001657R0001	2	0.2	1
30	16	6	1521271	FS401E-B16/0.03	2CCG001658R0001	2	0.2	1
30	20	6	1521288	FS401E-B20/0.03	2CCG001659R0001	2	0.2	1
30	25	6	1521295	FS401E-B25/0.03	2CCG001660R0001	2	0.2	1
30	32	6	1521301	FS401E-B32/0.03	2CCG001661R0001	2	0.2	1

C, 6 kA according to EN 61009-1

30	6	6	1521318	FS401E-C6/0.03	2CCG001662R0001	2	0.2	1
30	10	6	1521325	FS401E-C10/0.03	2CCG001663R0001	2	0.2	1
30	13	6	1521332	FS401E-C13/0.03	2CCG001664R0001	2	0.2	1
30	16	6	1521349	FS401E-C16/0.03	2CCG001665R0001	2	0.2	1
30	20	6	1521356	FS401E-C20/0.03	2CCG001666R0001	2	0.2	1
30	25	6	1521363	FS401E-C25/0.03	2CCG001667R0001	2	0.2	1
30	32	6	1521370	FS401E-C32/0.03	2CCG001668R0001	2	0.2	1

B, 10 kA according to EN 61009-1

30	6	10	1521387	FS401M-B6/0.03	2CCG001669R0001	2	0.2	1
30	10	10	1521394	FS401M-B10/0.03	2CCG001670R0001	2	0.2	1
30	13	10	1521400	FS401M-B13/0.03	2CCG001671R0001	2	0.2	1
30	16	10	1521417	FS401M-B16/0.03	2CCG001672R0001	2	0.2	1
30	20	10	1521424	FS401M-B20/0.03	2CCG001673R0001	2	0.2	1
30	25	10	1521431	FS401M-B25/0.03	2CCG001674R0001	2	0.2	1
30	32	10	1521448	FS401M-B32/0.03	2CCG001675R0001	2	0.2	1

C, 10 kA according to EN 61009-1

30	6	10	1521455	FS401M-C6/0.03	2CCG001676R0001	2	0.2	1
30	10	10	1521462	FS401M-C10/0.03	2CCG001677R0001	2	0.2	1
30	13	10	1521479	FS401M-C13/0.03	2CCG001678R0001	2	0.2	1
30	16	10	1521486	FS401M-C16/0.03	2CCG001679R0001	2	0.2	1
30	20	10	1521493	FS401M-C20/0.03	2CCG001680R0001	2	0.2	1
30	25	10	1521509	FS401M-C25/0.03	2CCG001681R0001	2	0.2	1
30	32	10	1521516	FS401M-C32/0.03	2CCG001682R0001	2	0.2	1
100	6	10	1521523	FS401M-C6/0.1	2CCG001683R0001	2	0.2	1
100	10	10	1521530	FS401M-C10/0.1	2CCG001684R0001	2	0.2	1
100	13	10	1521547	FS401M-C13/0.1	2CCG001685R0001	2	0.2	1
100	16	10	1521554	FS401M-C16/0.1	2CCG001686R0001	2	0.2	1
100	20	10	1521561	FS401M-C20/0.1	2CCG001687R0001	2	0.2	1
100	25	10	1521578	FS401M-C25/0.1	2CCG001688R0001	2	0.2	1
100	32	10	1521585	FS401M-C32/0.1	2CCG001689R0001	2	0.2	1

SMISSLINE TP plug-in system

RCBOs FS401 series 10 000 A K Type F

FS401 M

FS401 M A K type, short-time delayed
Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal compromise between safety and continuity of service, thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct (IΔn = 30 mA) contact; protection and isolation of resistive and inductive loads.
Application: residential, commercial, industrial.
Standard: IEC/EN 61009
Icn = 10 kA

B, 10 kA according to EN 61009-1

$I_{\Delta n}$	I_n	I_{cn}	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
[mA]	[A]	[kA]	EAN	Type code	Order code		kg	pc.
30	6	10	1521592	FS401MK-B6/0.03	2CCG001690R0001	2	0.2	1
30	10	10	1521608	FS401MK-B10/0.03	2CCG001691R0001	2	0.2	1
30	13	10	1521615	FS401MK-B13/0.03	2CCG001692R0001	2	0.2	1
30	16	10	1521622	FS401MK-B16/0.03	2CCG001693R0001	2	0.2	1
30	20	6	1521639	FS401MK-B20/0.03	2CCG001694R0001	2	0.2	1
30	25	6	1521646	FS401MK-B25/0.03	2CCG001695R0001	2	0.2	
30	32	6	1521653	FS401MK-B32/0.03	2CCG001696R0001	2	0.2	1

C, 10 kA according to EN 61009-1

30	6	10	1521660	FS401MK-C6/0.03	2CCG001697R0001	2	0.2	1
30	10	10	1521677	FS401MK-C10/0.03	2CCG001698R0001	2	0.2	1
30	13	10	1521684	FS401MK-C13/0.03	2CCG001699R0001	2	0.2	1
30	16	10	1521691	FS401MK-C16/0.03	2CCG001700R0001	2	0.2	1
30	20	6	1521707	FS401MK-C20/0.03	2CCG001701R0001	2	0.2	1
30	25	6	1521714	FS401MK-C25/0.03	2CCG001702R0001	2	0.2	1
30	32	6	1521721	FS401MK-C32/0.03	2CCG001703R0001	2	0.2	1

C, 10 kA according to EN 61009-1

300	6	10	1521738	FS401MK-C6/0.3	2CCG001704R0001	2	0.2	1
300	10	10	1521745	FS401MK-C10/0.3	2CCG001705R0001	2	0.2	1
300	13	10	1521752	FS401MK-C13/0.3	2CCG001706R0001	2	0.2	1
300	16	10	1521769	FS401MK-C16/0.3	2CCG001707R0001	2	0.2	1
300	20	10	1521776	FS401MK-C20/0.3	2CCG001708R0001	2	0.2	1
300	25	10	1521783	FS401MK-C25/0.3	2CCG001709R0001	2	0.2	1
300	32	10	1521790	FS401MK-C32/0.3	2CCG001710R0001	2	0.2	1

SMISSLINE TP plug-in system

RCBOs FS403 series 10000-6000 A A type and short time delay Type F

FS 403 M

4-pole RCBO from the ABB SMISSLINE protective devices range

The combination of circuit protection and a residual current protection in one device as 4-pole RCBO simplifies both – planning and installation. It enables you to provide perfect protection in one device. This protection consists of:

- Short circuit protection
- Overload protection
- Residual current protection
- Preventive fire protection

High rated short-circuit breaking capacity of 10 kA, conforming to EN 61009-1

The I_{cn} 10 kA short-circuit breaking capacity of the RCBO complies with standard EN 61009-1. This standard specifies testing and usage of RCBO's for household and similar uses.

The devices can also be used by non-professionals.

Features and benefits of the new devices:

- Overall width of 72 mm (4 modules)
- Rated sensitivity 30 mA
- Current rating 10 A to 32 A
- B and C tripping characteristics
- Easy Drive double deck terminals on the output side for connecting two conductors in one chamber. The two chambers can accommodate conductors with different cross sections.

Accessory:
Auxiliary- and signal contacts are to attach on to the left of the device through the customer.

Please notice:
For the influence of the ambient temperature and the thermal influences of row mounted RCBO's it is necessary to calculate with the same correction factors like with MCBs.

Please see in Chapter 2 of Electrical installation solutions for buildings - Technical details.

SMISSLINE TP plug-in system

Residual current operated circuit breaker (RCBO)

FS403 technical features

		FS403E	FS403M	FS403MK
Standards		IEC 61009-1, EN 61009-1, EN 61009-2-1	IEC 61009-1, EN 61009-1, EN 61009-2-1	IEC/EN 61009-1, IEC/EN 61009-2-1, IEC/EN 62423
Electrical features				
type (wave form of the earth leakage sensed)		A	A	APR - F
Number of poles		3P + N	3P + N	3P + N
Rated current I_n		$6 \le I_n \le 32$ A	$6 \le I_n \le 32$ A	$6 \le I_n \le 32$ A
Rated sensitivity $I_{\Delta n}$		0.03 A	0.03–0.1 A	0.03–0.3 A
Rated voltage U_e		240/415 V	240/415 V	240/415 V
Insulation voltage U_i		500 V	500 V	500 V
Overvoltage category		III	III	III
Pollution degree		2	2	2
Operating voltage of circuit test		110 V (170 for 30 mA) – 264V	110 V (170 for 30 mA) – 264V	110 V (170 for 30 mA) – 264V
Rated frequency		50/60 Hz	50/60 Hz	50/60 Hz
Rated breaking capacity		6000 A	10000 A	10000 A
Rated breaking capacity acc. to IEC/EN 60947-2 (only referring to short circuit test)	ultimate I_{cu} kA 6...16 A		25	25
	service I_{cs} kA 6...16 A		15	15
	ultimate I_{cu} kA 20...32 A		15	15
	service I_{cs} kA 20...32 A		7.5	7.5
Rated residual breaking capacity acc. to IEC/EN 61009-1 $I_{\Delta m}$		6000 A	10000 A	10000 A
Rated impulse withstand voltage (1.2/50) U_{imp}		4 kV	4 kV	4 kV
Thermomagnetic release – characteristic	B: $3\ I_n \le I_n \le 5\ I_n$		X	X
	C: $5\ I_n \le I_n \le 10\ I_n$	X	X	X
Grid distance		35 mm	35 mm	35 mm
Energy limiting class acc. to EN 61009-1		3	3	3

Mechanical features			
Housing	Insulation group I, light grey RAL 7035	Insulation group I, light grey RAL 7035	Insulation group I, light grey RAL 7035
Toggle	Insulation group II, black RAL 9005, sealable in ON-OFF positions	Insulation group II, black RAL 9005, sealable in ON-OFF positions	Insulation group II, black RAL 9005, sealable in ON-OFF positions
Earth fault indicator (DTI)	Light grey/blue Window	Light grey/blue Window	Light grey/blue Window
Contact position indication	Green/Red Window	Green/Red Window	Green/Red Window
Electrical endurance	10000 cycles (OFF-ON-OFF)	10000 cycles (OFF-ON-OFF)	10000 cycles (OFF-ON-OFF)
Mechanical endurance	20000 cycles (OFF-ON-OFF)	20000 cycles (OFF-ON-OFF)	20000 cycles (OFF-ON-OFF)
IP code	IP20, IP40 in enclosure with cover	IP20, IP40 in enclosure with cover	IP20, IP40 in enclosure with cover
Shock resistance acc. to IEC/EN 61373	Category 1, Class B	Category 1, Class B	Category 1, Class B
Shock resistance acc. to IEC/EN 60068-2-27 (Test Ea)	5g / 30ms	5g / 30ms	5g / 30ms
Vibration resistance acc. to IEC/EN 60068-2-6 (Test Fc)	5...13.2 Hz / 1 mm 13.2 ...100 Hz / 0.7 g with load 80% x I_n	5...13.2 Hz / 1 mm 13.2 ...100 Hz / 0.7 g with load 80% x I_n	5...13.2 Hz / 1 mm 13.2 ...100 Hz / 0.7 g with load 80% x I_n
Reference temperature for setting of thermal element	30 °C	30 °C	30 °C
Ambient temperature	–25...+60 °C	–25...+60 °C	–25...+60 °C
Storage temperature	–40...+70 °C	–40...+70 °C	–40...+70 °C

Installation	
Terminal type	failsafe bi-directional cylinder-lift terminal (shock protected)
Top terminal rigid IEC connections (solid/stranded)	Single: 0.75 ÷ 35 mm² (front slot), 0.75 ÷ 10 mm² (rear slot) Multiple: 2 x 0.75 ÷ 10 mm² (front slot), 2 x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size
Top terminal flexible IEC connections	Single: 0.75 ÷ 25 mm² (front side), 0.75 ÷ 6 mm² (rear slot) Multiple: 2 x 0.75 ÷ 10 mm² (front slot), 2 x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size

SMISSLINE TP plug-in system

RCBOs FS403 series 10000-6000 A type and short time delay Type F

FS 403 M

FS403 M A type, B and C characteristic

Function: protection of end user single-phase circuits against overload and short-circuit currents; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Application: residential, commercial, industrial.

Standard: IEC/EN 61009, Icn = 6 kA, Icn =10 kA

B, 10 kA according to EN 61009-1

Poles	Sensitivity	Rated current	Rated breaking capacity	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	IΔn mA	In A	Icn kA	EAN	Type code	Order code		kg	pc.
4	30	6	10	1521806	FS403M-B6/0.03	2CCG001711R0001		0.420	1
		10	10	1521813	FS403M-B10/0.03	2CCG001712R0001		0.420	1
		13	10	1521820	FS403M-B13/0.03	2CCG001713R0001		0.420	1
		16	10	1521837	FS403M-B16/0.03	2CCG001714R0001		0.420	1
		20	10	1521844	FS403M-B20/0.03	2CCG001715R0001		0.420	1
		25	10	1521851	FS403M-B25/0.03	2CCG001716R0001		0.420	1
		32	10	1521868	FS403M-B32/0.03	2CCG001717R0001		0.420	1

C, 6 kA according to EN 61009-1

Poles	Sensitivity	Rated current	Rated breaking capacity	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	IΔn mA	In A	Icn kA	EAN	Type code	Order code		kg	pc.
4	30	6	6	1521875	FS403E-C6/0.03	2CCG001718R0001		0.420	1
		10	6	1521882	FS403E-C10/0.03	2CCG001719R0001		0.420	1
		13	6	1521899	FS403E-C13/0.03	2CCG001720R0001		0.420	1
		16	6	1521905	FS403E-C16/0.03	2CCG001721R0001		0.420	1
		20	6	1521912	FS403E-C20/0.03	2CCG001722R0001		0.420	1
		25	6	1521929	FS403E-C25/0.03	2CCG001723R0001		0.420	1
		32	6	1521936	FS403E-C32/0.03	2CCG001724R0001		0.420	1

C, 10 kA according to EN 61009-1

Poles	Sensitivity	Rated current	Rated breaking capacity	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	IΔn mA	In A	Icn kA	EAN	Type code	Order code		kg	pc.
4	30	6	10	1521943	FS403M-C6/0.03	2CCG001725R0001		0.420	1
		10	10	1521950	FS403M-C10/0.03	2CCG001726R0001		0.420	1
		13	10	1521967	FS403M-C13/0.03	2CCG001727R0001		0.420	1
		16	10	1521974	FS403M-C16/0.03	2CCG001728R0001		0.420	1
		20	10	1521981	FS403M-C20/0.03	2CCG001729R0001		0.420	1
		25	10	1521998	FS403M-C25/0.03	2CCG001730R0001		0.420	1
		32	10	1522001	FS403M-C32/0.03	2CCG001731R0001		0.420	1

C, 10 kA according to EN 61009-1

Poles	Sensitivity	Rated current	Rated breaking capacity	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	IΔn mA	In A	Icn kA	EAN	Type code	Order code		kg	pc.
4	100	6	6	1522018	FS403M-C6/0.1	2CCG001732R0001		0.420	1
		10	10	1522025	FS403M-C10/0.1	2CCG001733R0001		0.420	1
		13	10	1522032	FS403M-C13/0.1	2CCG001734R0001		0.420	1
		16	10	1522049	FS403M-C16/0.1	2CCG001735R0001		0.420	1
		20	10	1522056	FS403M-C20/0.1	2CCG001736R0001		0.420	1
		25	10	1522063	FS403M-C25/0.1	2CCG001737R0001		0.420	1
		32	10	1522070	FS403M-C32/0.1	2CCG001738R0001		0.420	1

SMISSLINE TP plug-in system

RCBOs FS403 series 10000-6000 A type and short time delay Type F

FS 403 M

B, 10 kA according to EN61009-1 short time delayed (APR) Type F

Poles	Sensitivity	Rated current	Rated breaking capacity	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	IΔn mA	In A	Icn kA	EAN	Type code	Order code		kg	pc.
4	30	6	10	1522087	FS403MK-B6/0.03	2CCG001739R0001		0.420	1
		10	10	1522094	FS403MK-B10/0.03	2CCG001740R0001		0.420	1
		13	10	1522100	FS403MK-B13/0.03	2CCG001741R0001		0.420	1
		16	10	1522117	FS403MK-B16/0.03	2CCG001742R0001		0.420	1
		20	10	1522124	FS403MK-B20/0.03	2CCG001743R0001		0.420	1
		25	10	1522131	FS403MK-B25/0.03	2CCG001744R0001		0.420	1
		32	10	1522148	FS403MK-B32/0.03	2CCG001745R0001		0.420	1

C, 10 kA according to EN61009-1 short time delayed (APR) Type F

Poles	Sensitivity	Rated current	Rated breaking capacity	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	IΔn mA	In A	Icn kA	EAN	Type code	Order code		kg	pc.
4	30	6	10	1522155	FS403MK-C6/0.03	2CCG001746R0001		0.420	1
		10	10	1522162	FS403MK-C10/0.03	2CCG001747R0001		0.420	1
		13	10	1522179	FS403MK-C13/0.03	2CCG001748R0001		0.420	1
		16	10	1522186	FS403MK-C16/0.03	2CCG001749R0001		0.420	1
		20	10	1522193	FS403MK-C20/0.03	2CCG001750R0001		0.420	1
		25	10	1522209	FS403MK-C25/0.03	2CCG001751R0001		0.420	1
		32	10	1522216	FS403MK-C32/0.03	2CCG001752R0001		0.420	1

C, 10 kA according to EN 61009-1

Poles	Sensitivity	Rated current	Rated breaking capacity	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	IΔn mA	In A	Icn kA	EAN	Type code	Order code		kg	pc.
4	300	6	10	1522223	FS403MK-C6/0.3	2CCG001753R0001		0.420	1
		10	10	1522230	FS403MK-C10/0.3	2CCG001754R0001		0.420	1
		13	10	1522247	FS403MK-C13/0.3	2CCG001755R0001		0.420	1
		16	10	1522254	FS403MK-C16/0.3	2CCG001756R0001		0.420	1
		20	10	1522261	FS403MK-C20/0.3	2CCG001757R0001		0.420	1
		25	10	1522278	FS403MK-C25/0.3	2CCG001758R0001		0.420	1
		32	10	1522285	FS403MK-C32/0.3	2CCG001759R0001		0.420	1

SMISSLINE TP plug-in system

Residual current operated circuit breaker (RCBO)

FS402 technical features

		FS402-MK
Standards		IEC/EN 61009-1, IEC/EN 61009-2-1, IEC/EN 62423
Electrical features		
type (wave form of the earth leakage sensed)		APR - F
Number of poles		1p + N (protected)
Rated current I_n		$6 \le I_n \le 32$ A
Rated sensitivity $I_{\Delta n}$		0.03
Rated voltage U_e		240/415 V
Insulation voltage U_i		500 V
Overvoltage category		III
Pollution degree		2
Operating voltage of circuit test		110 V (170 for 30 mA) – 264
Rated frequency		50/60 Hz
Rated breaking capacity acc. to IEC/EN 61009-1 I_{cn}		10000 A
Rated breaking capacity acc. to IEC/EN 60947-2 (only referring to short circuit test)	ultimate I_{cu} kA 6...16 A	25
	service I_{cs} kA 6...16 A	15
	ultimate I_{cu} kA 20...32 A	15
	service I_{cs} kA 20...32 A	7.5
Rated residual breaking capacity acc. to IEC/EN 61009-1 $I_{\Delta m}$		10000 A
Rated impulse withstand voltage (1.2/50) U_{imp}		4 kV
Dielectric test voltage at ind. freq. for 1 min.		2.5 kV (50/60 Hz, 1 min.)
Thermomagnetic release – characteristic	B: $3\,I_n \le I_n \le 5\,I_n$	X
	C: $5\,I_n \le I_n \le 10\,I_n$	X
Energy limiting class acc. to EN 61009-1		3

Mechanical features	
Housing	Insulation group I, light grey RAL 7035
Toggle	Insulation group II, black RAL 9005, sealable in ON-OFF positions
Earth fault indicator (DTI)	Light grey/blue Window
Contact position indication	Green/Red Window
Electrical endurance	10000 cycles (OFF-ON-OFF)
Mechanical endurance	20000 cycles (OFF-ON-OFF)
IP code	IP20, IP40 in enclosure with cover
Shock resistance acc. to IEC/EN 61373	Category 1, Class B
Shock resistance acc. to IEC/EN 60068-2-27 (Test Ea)	5g / 30ms
Vibration resistance acc. to IEC/EN 60068-2-6 (Test Fc)	2...13.2 Hz/1 mm 13.2...100 Hz/0.7 g, 5 cycles 5...150 ... 5 Hz/1 g, 4 waves
Reference temperature for setting of thermal element	30 °C
Ambient temperature	–25...+60 °C
Storage temperature	–40...+70 °C

Installation	
Terminal type	failsafe bi-directional cylinder-lift terminal (shock protected)
Top terminal rigid IEC connections (solid/stranded)	Single: 0.75 ÷ 35 mm² (front slot), 0.75 ÷ 10 mm² (rear slot) Multiple: 2 x 0.75 ÷ 10 mm² (front slot), 2 x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size
Top terminal flexible IEC connections	Single: 0.75 ÷ 25 mm² (front side), 0.75 ÷ 6 mm² (rear slot) Multiple: 2 x 0.75 ÷ 10 mm² (front slot), 2 x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size

RCBOs (1P+N)

FS402 series 10 000 F type, AP-R (high immunity)
B and C characteristics

FS 402

FS402 with protected neutral

B characteristic

Poles	Sensi-tivity	Rated current	Rated breaking capacity	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	I∆n mA	In A	Icn kA	EAN	Type code	Order code		kg	pc.
2	30	6	10	1522292	FS402MK-B6/0.03	2CCG001760R0001		3	0.312
		10	10	1522308	FS402MK-B10/0.03	2CCG001761R0001		3	0.312
		13	10	1522315	FS402MK-B13/0.03	2CCG001762R0001		3	0.312
		16	10	1522322	FS402MK-B20/0.03	2CCG001763R0001		3	0.312
		20	10	1522339	FS402MK-B16/0.03	2CCG001764R0001		3	0.312
		25	10	1522346	FS402MK-B25/0.03	2CCG001765R0001		3	0.312
		32	10	1522353	FS402MK-B32/0.03	2CCG001766R0001		3	0.312

C charachteristic

2	30	6	10	1522360	FS402MK-C6/0.03	2CCG001767R0001		3	0.312
		10	10	1522377	FS402MK-C10/0.03	2CCG001768R0001		3	0.312
		13	10	1522384	FS402MK-C16/0.03	2CCG001769R0001		3	0.312
		16	10	1522391	FS402MK-C20/0.03	2CCG001770R0001		3	0.312
		20	10	1522407	FS402MK-C25/0.03	2CCG001771R0001		3	0.312
		25	10	1522414	FS402MK-C32/0.03	2CCG001772R0001		3	0.312
		32	10	1522421	FS402MK-C13/0.03	2CCG001773R0001		3	0.312

SMISSLINE TP plug-in system

Surge arrester



OVR404 4L with varistors for TNS



OVR3LN with Varistor/gaz tube (N) for TT-TNS

The type 2 surge arresters in the QuickSafe product range are suitable for protecting electrical low voltage systems and terminals in the 240/415 V system. The devices can be used as type 2 surge arresters within the scope of the lightning protection zone concept at zone transition 0B–1 and higher. The high nominal discharge capability of 20 kA makes it possible for the equipment to have a longer service life in comparison to the minimum requirements of the standard. The devices consist of a basic unit and pluggable protection modules, which can be removed extremely easily to carry out insulation measurement. They are fully compatible with SMISSLINE installation devices and the surge arresters in the ABB System pro M model series. The surge arresters are tested as type 2 arresters in accordance with the EN/IEC 61643-11 test standard.

Mounting

Installation and electrical connection

The over voltage protection device “OVR” will be installed near the front of the protected consumers conditioning.

The surge arrester is to be mounted right after the Incoming block of the socket system.

The OVR404 is snapped directly onto the SMISSLINE bus bar system.

SMISSLINE TP plug-in system

Surge arrester

Type	**OVR404 4L 40-275 P TS QS**	**OVR404 3N 40-275 P TS QS**
Technology	varistor	Varistor/gaz tube (N)
System network	TNS	TT–TNS
Electrical features		
Standard	IEC 61643-11/EN 61643-11	IEC 61643-11/EN 61643-11
Type / test class	Type 2	Type 2
Number of pole	4	4
Nominal voltage UN (L-N, L-L)	240/415 V	240/415 V
Type of voltage	a.c. 45–65 Hz	a.c. 45–65 Hz
Max. cont. operating voltage U_c	275 V AC	275 V AC
Nominal discharge current I_n (8/20)	20 kA	20 kA
Maximum discharge current I_{max} (8/20)	40 kA	40 kA
Maximum impulse current I_{imp} (10/350)	2 kV	2 kA
Voltage protection level U_p at I_n (L-N / N-PE / L-PE)	1.5 kV	1.25/1.4/1.5 kV
Voltage protection level U_p at 3 kA (L-N / N-PE / L-PE)	0.5 kV	0.8/1.4/0.85 kV
Voltage protection level U_p at 5 kA (L-N / N-PE / L-PE)	0.7 kV	0.85/1.4/0.95 kV
Voltage protection level U_p at 10 kA (L-N / N-PE / L-PE)	0.9 kV	1/1.4/1.15 kV
TOV (Temporary overvoltage) withstand U_t (L-N: 5s./N-PE: 200 ms)	337/- V	337/1200 V
Response time Response time	≤ 25 ns	≤ 25 ns
Short-circuit withstand capability Isccr	100 kA	100 kA
Back up protection circuit breaker	≤ 125 A; S800S B	≤ 125 A; S800S B
Pluggable cartridge	Yes	Yes
Integrated QuickSafe® technology	Yes	Yes
State indicator	Yes	Yes
Auxiliary contact (TS)	Yes	Yes
Installation		
Wire range (L, N, PE)	2.5…25 mm²	2.5…25 mm²
	cable or rope	cable or rope
Connection cross-section	2.5…16 mm² litz wire with ferrule	2.5…16 mm² litz wire with ferrule
Tightening torque	2.8 Nm	2.8 Nm
Auxiliary contact (TS)		
Contacts information	1 NO – 1 NC	1 NO – 1 NC
Max. load/current	12 V DC – 10 mA	12 V DC – 10 mA
Min. load/current	250 V AC – 1 A	250 V AC – 1 A
	1.5 mm²	1.5 mm²
Operating temperature	–25 °C – +60 °C	–25 °C – +60 °C
Stocking temperature	–25 °C – +80 °C	–25 °C – +80 °C

Back up protection

Typ 2 QuickSafe® Surge Protective Devices	**Prospective short circuit current at SPD location (Ip)**	**Circuit breaker maximum ratings 1) curve B or C**	**Fuse 2) (gL - gG)**
Maximum ratings			
I_n: 5, 20, 30 kA	0,625 kA < I_p < 100 kA	S800S B or C – 125 A [2)]	125 A fuse
U_c: 275, 350, 440, 600 V			

1) Maximum ratings, must be in accordance with the installation to follow coordination rules with main or upstream short circuit protection(s).

2) up to Ip ≤ 50 kA

SMISSLINE TP plug-in system

Surge arrester

OVR404



OVR404 4L with varistors for TNS



OVR3LN with Varistor/gaz tube (N) for TT-TNS

Surge arrester OVR404

Rated current Isn (8/20 µs) kA	Bbn 761227 EAN	Order details Type code	 Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
20	1455491	OVR404 4L 40-275 P TS QS	2CCF606000R0001		0.470	1
20	1455507	OVR404 3N 40-275 P TS QS	2CCF606002R0001		0.450	1
20	1465322	OVR404 4L 40-440 P TS QS	2CCF606000A0003		0.470	1

SMISSLINE TP plug-in system

Switch disconnector

IS404 63

Technical data for switch disconnector IS404

Rated voltage Un	230/400 V~
Rated current In	63 A
Rated frequency fn	50 Hz
Number of poles	4
Rated impulse withstand voltage	6 kV
Connection cross-sections Cu	Top terminal type: Failsafe bi-directional cylinder-lift terminal with double slot 25/10 mm² Top terminal rigid IEC connections (solid/stranded): – Single: 0.75 ÷ 25 mm² (front slot), 0.75 ÷ 10 mm² (rear slot) – Multiple: 2 x 0.75 ÷ 10 mm² (front slot), 2 x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size Top terminal flexible IEC connections: – Single: 0.75 ÷ 16 mm² (front side), 0.75 ÷ 6 mm² (rear slot) – Multiple: 2 x 0.75 ÷ 10 mm² (front slot), 2 x 0.75 ÷ 6 mm² (rear slot), with cables of same type and size
Degree of protection	IP20, IP40 in enclosure with cover
Endurance, mechanical/electrical	5000 operating cycles
Mounting position	any
Ambient temperature	–25 °C ... +60 °C
Specifications	EN/IEC 60947-3
Weight (approx.)	250 g
Switching duty	AC-22A
Environmental conditions (damp heat) acc. to IEC/EN 60068	-2-30 28 cycles with 55 °C/90...96 % and 25 °C/95...100 %

General switch disconnector

When used in a smissline socket system, the switch disconnector can be used instead of the incoming terminal block for up to 63 A.
With the smissline IS404 switch disconnector, individual loads, groups of loads or entire system parts can be separated or connected to the input supply.
The key features of the switch disconnector

- Input supply switch
- On-Off function
- Clear indication of switching position
- Snap-on auxiliary switch available
- Uniform smissline design

Switch disconnector IS404

	Rated current	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	In kA	EAN	Type code	Order code		kg	pc.
	63	0104390	IS404 63	2CCF544160E0630		0.380	1

SMISSLINE TP plug-in system

Auxiliary elements and accessories

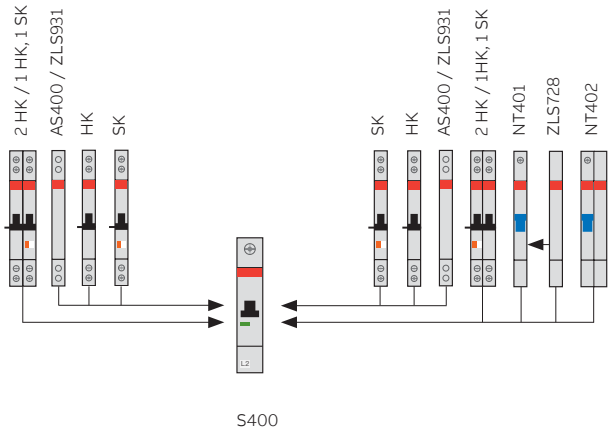

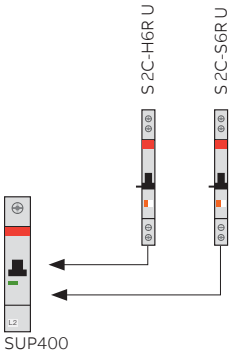

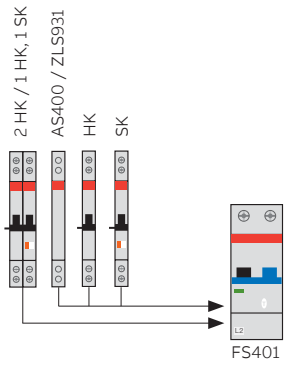

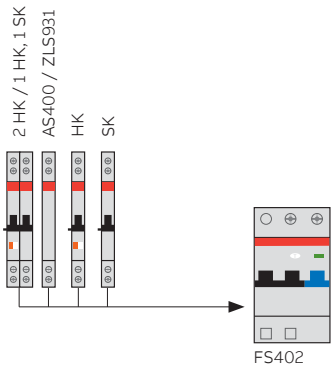

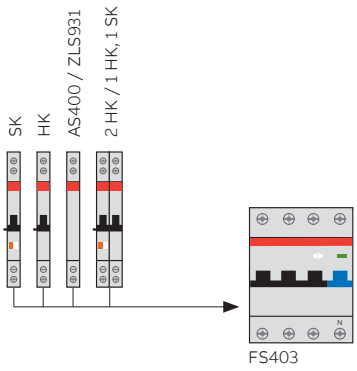

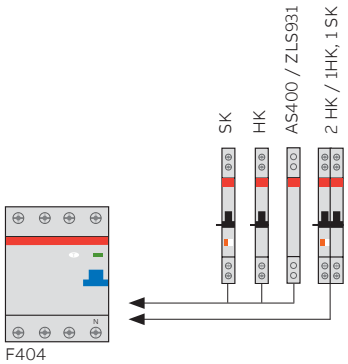

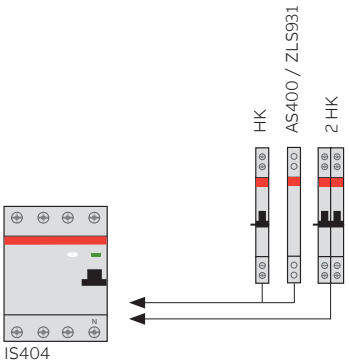

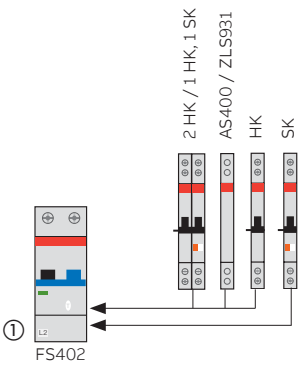

On each protective device can be mounted:

1 auxiliary switch
or 1 signal contact
or 2 auxiliary contact switches
or 1 auxiliary switch and 1 signal contact

SMISSLINE TP plug-in system

Auxiliary switch and signal contacts

MCB S400, RCCB F404, RCCB F402, RCBO FS401

Technical data for auxiliary switch and signal contact

	Signal contact SK400	Auxiliary switch HK400
Rated voltage Un	400 V	400 V
Rated impulse withstand voltage	4 kV	4 kV
Rated current – Ith – AC15 – DC13 – DC13	 6 A 2 A/230 V / 1 A/400 V 0.55 A/125 V= 0.27 A/250 V=	 6 A 2 A/230 V / 1 A/400 V 0.55 A/125 V= 0.27 A/250 V=
Minimum current/voltage (to ensure reliable electrical operation)	10 mA 12 V=	10 mA 12 V=
Connection cross-sections Rigid IEC connections (solid/stranded)	Single: 0.75…1.5 mm^2, Multiple: 2 x 0.75…1.5 mm^2, Flexible IEC connections	Single: 0.75…1.5 mm^2, Multiple: 2 x 0.75…1.5 mm^2, Stripping length 7.5 mm
Internal resistance Ri	0.0065 Ω	0.0065 Ω
Rated insulation voltage (Ui)	440 V	440 V
Pollution degree	3	3
Power loss at rated current Pv	0.24 W	0.24 W
Ambient temperature	–40...+70°C	–40...+70°C
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	28 cycles with 55 °C/90…96 % and 25 °C/95…100 %	
Mechanical endurance	20000 cycles (OFF-ON-OFF)	
Tightening torque	1 Nm	1 Nm

Contact description signal contact



SK40011



SK40020



SK40002

Contact description auxiliary switch







SMISSLINE TP plug-in system

Auxiliary switch and signal contacts
MCB S400, RCCB F404, RCCB F402, RCBO FS401

HK400..L

HK400..R

SK400..L

SK400..R

Auxiliary switch

The auxiliary switch and signal contacts are supplied with one contacting piece. The signal contact collective alarm are supplied with two contacting pieces.

for left side mounting on MCB S400, RCCB F402, RCBO FS401, FS403

	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
1NO and 1NC	0100910	HK40011-L	2CCS500900R0081		0.045	10
2NO	0111183	HK40020-L	2CCF201112R0001		0.040	10
2NC	0111190	HK40002-L	2CCF201114R0001		0.040	10
for right side mounting on RCCB F404, MCB S400 and IS404						
1NO and 1NC	0108619	HK40011-R	2CCS500900R0214		0.045	10
2NO	0111206	HK40020-R	2CCF201113R0001		0.040	10
2NC	0111213	HK40002-R	2CCF201115R0001		0.040	10

Signal contacts

for left side mounting on MCB S400, RCCB F402, RCBO FS401, FS403

	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
1NO and 1NC	0100934	SK40011-L	2CCS500900R0101		0.045	10
2NO	0111107	SK40020-L	2CCF201162R0001		0.040	10
2NC	0111114	SK40002-L	2CCF201164R0001		0.040	10
for right side mounting on RCCB F404 and MCB S400						
1NO and 1NC	0108626	SK40011-R	2CCS500900R0215		0.045	10
2NO	0111121	SK40020-R	2CCF201163R0001		0.040	10
2NC	0111138	SK40002-R	2CCF201165R0001		0.040	10

Signal contact collective alarm and auxiliary contact

for left side mounting

	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
1NO	0107964	SK40010-L SA	2CCS500900R0141		0.045	10
1NO	1407902	HK40010-L SA	2CCF201212R0001		0.045	10
for right side mounting						
1NO	0108633	SK40010-R SA	2CCS500900R0216		0.045	10
1NO	1407919	HK40010-R SA	2CCF201213R0001		0.045	10

Collective alarm, signal contact contacts the auxiliary busbars LA, LB

A cost-effective collective alarm solution can be implemented without additional wiring by using this arrangement.

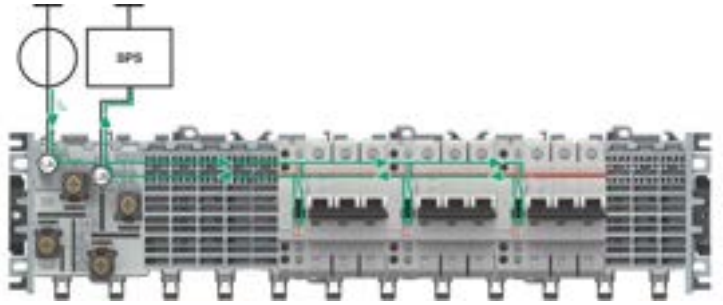

SMISSLINE TP plug-in system

Dummy housing, Neutral disconnector, shunt trip

Dummy housing

Connection support dummy housing
for left or right side mounting on MCB S400, RCCB F402, RCCB F404, RCBO FS401

Connection support	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	100958	AS400	2CCS500900R0151		0.045	10
Dummy housing						
Compensation to 18 mm	0100965	ZLS931	2CCS500900R0161		0.035	10

Contacting

Contacting pieces for auxiliary switch and signal contacts

Connection support	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Contacting piece for HK/SK LA, LB Pack contains 100 items	0100972	ZLS632	2CCS500900R0171		0.200	Pack contains 100 items
Contacting piece for HK/SK LA, LB Pack contains 10 items	0109265	ZLS635	2CC5201307R0171		0.020	Pack contains 10 items
Contact Pin	0108640	ZLS633	2CCS500900R0201		0.020	Pack contains 10 items

Neutral disconnector

Neutral disconnector
On the load side terminal two separate conductors can be clamped

Connection support	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Neutral disconnector 9 mm	0100859	NT401 63	2CCS500900R0021		0.045	10
Neutral disconnector 18 mm	0100842	NT402 63	2CCS500900R0011		0.058	10
Compensation to 18 mm for NT401 63	0104710	ZLS728	2CCS400900R0101		0.015	1 Bag contains 5 items

Auxiliary elements for MCBs, SUP400

Auxiliary and signal contacts for UL applications

S2C-S6R U

S2C-H6R U

Auxiliary contact and signal contact		
		S2C-H6RU, S2C-S6RU
Suitable for		SUP400
Rating according UL 489 / CSA22-2 No.5		1A / 480 VAC 2A / 277 VAC 1.5 A / 125 VDC 2A / 60 VDC 4 A / 24 VDC
Conventional free air thermal current	A	10
Min. operational current/voltage*		10 mA at 12 V; 5 mA at 24 V
Overvoltage category		III
Rated impuls withstand voltage (1.2/50µs)	kV	4
Cross section of conductors	mm^2	0.75…2.5
Tightening torque	Nm	1.2
Contact stability in vibration test according to IEC/EN60068-2-6		5g, 20 sweep cycles 5…150…5 Hz according to DIN IEC 68-2-6 at 24 V AC/DC, 5 mA automatic reclosing < 10 ms
Mechanical endurance		10000 cycles (OFF-ON-OFF)
Dimensions (H x D x W)	mm	100 x 69 x 8.8

* ensures safe contacting without current interruption by pollution layer.

Auxiliary contact						
Description	**Bbn 4016779**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
only for range U/UP/UDC SUP400	615617	S2C-H6R U	2CDS200914R0001		0.035	1

Signal contact						
Description	**Bbn 4016779**	**Order details**		**Price 1 piece**	**Weight 1 piece**	**Pack unit**
	EAN	**Type code**	**Order code**		**kg**	**pc.**
only for range U/UP/UDC SUP400	615624	S2C-S6R U	2CDS200924R0001		0.035	1

SMISSLINE TP plug-in system

Technical data IEC/EN 61439-6

Busbar system 125 A

Busbar system touch proof:
Use only for wall mounted application (horizontal or vertical). When installed correctly the requirements of IEC/EN 61439-2 are met.

Number of poles	max. 6 to 110 3p+N / 2 additional bars PE+N
Rated operational voltage (U_e)	690 VAC, 440 VDC (415 V for LA, LB busbars)
Rated insulation voltage (U_i)	690 VAC, 440 VDC
IP Code	IP20B
Mounting position	horizontal or vertical, direct mounting or mounting on DIN rail acc. to EN 60715 35 mm
Pollution degree	3 (690 V a.c.) 2 (440 V d.c.)
Rated impulse voltage (U_{imp})	8 kV Main busbars; 6 KV Auxiliary busbars
Rated current of the assembly (I_{nA})	Main circuit: 125 A (side feeding), 200 A (mid feeding), 250 A (double side or mid feeding), Auxiliary circuit: 40 A
Rated current of a circuit (I_{nc})	Main circuit: max 125 A, Auxiliary circuit: max 40 A
Rated short-time withstand current (I_{cw})	Main circuit:15 kA / 100 ms, Auxiliary circuit: 4 kA / 50 ms
Rated peak withstand current (I_{pk})	Main circuit: 30 kA, Auxiliary circuit: 6 kA
Rated frequency (f)	50/60 Hz, DC
Rated conditional short-circuit current (I_{cc})	100 kA (415V), 50 kA (690 V)
Ambient air temperature	max. 60°C
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	1 cycle with 55 °C/90…96 % and 25 °C/95…100 %
Size of CU bars 3P+N+PE	3 x 10 mm (30 mm²)
Size of CU auxiliary bars La Lb	2 x 5 mm (10 mm²)
Resistance and reactance values for Busbar ZLS200	R 0.325mΩ/m X 0.295mΩ/m

	Maximum rated voltage	Maximum rated current	Cross-section of conductors
Incoming terminal block ZLS250–253	690 VAC 1000 VDC	160 A	35 mm²–95 mm² max. 1 wire, 10–25 mm² 1 or 2 wires
Busbar ZLS200	690 VAC 1000 VDC	125 A	
Busbar ZLS202	690 VAC 600 VDC	40 A	
DIN Rail adapters 32 A	690 VAC 600 VDC	32 A Line or neutral	
DIN Rail adapters 63 A	690 VAC 600 VDC	63 A Line or neutral	
Combi module	690 VAC 600 VDC	32 A Line or neutral 6A LA, LB	
The SMISSLINE system and components are tested for vibration according to IEC 60068-2-6 (2–13.2 Hz/1 mm displacement, 13.2–100 Hz/0.7 g) and for Miniature circuit breakers (5 g, 20 frequency cycles 5 …150 … 5 Hz at 0.8 rated current)			
Standard: IEC 60068-2-6 Environmental testing – Part 2–6: Test Fc. Vibration (sinusoidal)			

SMISSLINE TP plug-in system

Technical data IEC/EN 61439-6

Busbar system 125 A

125A System Rated Voltage (U_e) Main busbar (L1, L2, L3, N)	**Rated Voltage (U_e) Rated conditional short-circuit current (I_{cc})**	**Short circuit protection device (SCPD)**
U_e AC 415 V	100kA	Protective Device Fuse NH1 (InA: 200 A)
U_e AC 690 V	25kA	Protective Device Fuse NH1 (InA: 200 A)
U_e AC 415 V	100kA	Protective Device XT4 (InA: 200 A)
U_e AC 690 V	25kA	Protective Device XT4 (InA: 200 A)
U_e AC 415 V	50kA	Protective Device XT3 (InA: 200 A)
U_e AC 690 V	6kA	Protective Device XT3 (InA: 200 A)
U_e AC 415 V	100kA	Protective Device XT2 (InA: 160 A)
U_e AC 690 V	18kA	Protective Device XT2 (InA: 160 A)
U_e AC 415 V	70kA	Protective Device XT1 (InA: 160 A)
U_e e AC 690 V	10kA	Protective Device XT1 (InA: 160 A)
U_e AC 415 V	50kA	Protective Device Series S800 (InA: 125 A)
U_e AC 690 V	4.5kA	Protective Device Series S800 (InA: 125 A)
Auxiliary busbar (LA, LB)		
U_e AC 240 V	100kA	Protective Device Fuse (InA: 40 A)
U_e AC 415 V	100kA	Protective Device Fuse (InA: 40 A)
U_e AC 240 V	50kA	Protective Device Series S800 (InA: 40 A)
U_e AC 415 V	5kA	Protective Device Series S800 (InA: 40 A)
U_e AC 240 V	15kA	Protective Device Series S400 (InA: 40 A)
U_e AC 240 V	15kA	Protective Device Series S200 (InA: 40 A)

SMISSLINE TP plug-in system

Technical data data UL508; Approvals for US and CA: cULus
Busbar system 125 A

SMISSLINE TP system for UL 508 – Industrial Control Equipment, CSA C22.2 No. 14 – Industrial Control Equipment UL File E222110

Technical data UL508 Industrial Control Equipment SMISSLINE TP busbar system	
Rated Voltage	600 VAC
Rated Current	125 A
Rated Current (End Feed, left and right)	125 A left, 125 A right
Rated Current (Center)	250 A max. (double feed)
Rated Current (Center Feed)	250 A max. if used with two feeder blocks
Short Circuit Ratings ABB T_{max} XT2, XT3, XT4	50 kA, max. 480 VAC, 480 Y/277 V and 240 VAC or 35 kA, max. 600 VAC and 600 Y/347 V

Technical data UL508 Industrial Control Equipment (ZLS906, ZLS908, ZLS920, ZLS926, ZLS928)

	Busbar ZLS200	Feeder ZLS924	Feeder block ZLS95X	Combimodule ZLS840X, 842X	DIN Rail adapter ZLS97X	Terminals ZLS95XUL, 91XUL	Combi modul ZMS132X	Adapter moter starter ZMS93X
Maximum rated voltage	600 VAC	600 VAC	600 VAC	600 VAC	600 VAC	600 VAC	600 VAC	600 VAC
Maximum rated current	125 A	150 A	150 A	30 A	32 A, 63 A	32 A, 100 A, 150 A	32 A	32 A

Terminals for 125 A SMISSLINE TP System

ZLS954UL – Terminal 150 A (Neutral)
ZLS959UL – Terminal (PE)
ZLS913UL – Terminal 63 A (Neutral)
ZLS918UL – Terminal 32 A (Neutral)
ZLS919UL – Terminal (PE)
ZLS929UL – Terminal (PE)

DIN Rail adapters for MCB SU200 and SUP200

	970UL, 971UL, 972UL or 973UL
Maximum nominal current	25 A, 45 A

SMISSLINE TP plug-in system

Starter pack Touch proof 3L – 125 A system

Starter Pack 3L: L1, L2, L3 inclusive socket end piece

For all starter pack the order of the 6 and 8 module sockets is like this:

Sequence(from Left to right):
All 8pole modules(Minus One) – All 6 pole modules – One 8 pole module

On some small busbar configurations there is only one 8 pole module present.
There we apply this sequence:
All 8pole modules – All 6 pole modules

Solutions available	Busbars length incl. Socket end piece	Busbars length	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	mm	mm	EAN	Type code	Order code		kg	pc.
18 PLE 3L	364	320	1426514	ZLS905E18-3L	2CCA183232R0001		0.530	1
20 PLE 3L	401	355	1413231	ZLS905E20-3L	2CCA183100R0001		0.637	1
22 PLE 3L	437	391	1413255	ZLS905E22-3L	2CCA183102R0001		0.693	1
24 PLE 3L	473	427	1413279	ZLS905E24-3L	2CCA183104R0001		0.749	1
26 PLE 3L	509	463	1413293	ZLS905E26-3L	2CCA183106R0001		0.813	1
28 PLE 3L	545	499	1413415	ZLS905E28-3L	2CCA183108R0001		0.848	1
30 PLE 3L	581	535	1413439	ZLS905E30-3L	2CCA183110R0001		0.933	1
32 PLE 3L	617	571	1413453	ZLS905E32-3L	2CCA183112R0001		0.981	1
34 PLE 3L	653	607	1413477	ZLS905E34-3L	2CCA183114R0001		1.044	1
36 PLE 3L	689	643	1413491	ZLS905E36-3L	2CCA183116R0001		1.100	1
38 PLE 3L	725	679	1413514	ZLS905E38-3L	2CCA183118R0001		1.156	1
40 PLE 3L	761	715	1413538	ZLS905E40-3L	2CCA183120R0001		1.212	1
42 PLE 3L	797	751	1413552	ZLS905E42-3L	2CCA183122R0001		1.276	1
44 PLE 3L	833	787	1413576	ZLS905E44-3L	2CCA183124R0001		1.332	1
46 PLE 3L	869	823	1413590	ZLS905E46-3L	2CCA183126R0001		1.388	1
48 PLE 3L	905	859	1413613	ZLS905E48-3L	2CCA183128R0001		1.444	1
50 PLE 3L	941	896	1413637	ZLS905E50-3L	2CCA183130R0001		1.508	1
52 PLE 3L	977	932	1413651	ZLS905E52-3L	2CCA183132R0001		1.564	1
54 PLE 3L	1013	968	1413675	ZLS905E54-3L	2CCA183134R0001		1.620	1
56 PLE 3L	1049	1004	1413699	ZLS905E56-3L	2CCA183136R0001		1.675	1
58 PLE 3L	1058	1040	1413712	ZLS905E58-3L	2CCA183138R0001		1.739	1
60 PLE 3L	1122	1076	1413736	ZLS905E60-3L	2CCA183140R0001		1.795	1
62 PLE 3L	1158	1112	1413750	ZLS905E62-3L	2CCA183142R0001		1.851	1
64 PLE 3L	1194	1148	1413774	ZLS905E64-3L	2CCA183144R0001		1.907	1
66 PLE 3L	1230	1184	1413798	ZLS905E66-3L	2CCA183146R0001		1.971	1
68 PLE 3L	1266	1220	1413811	ZLS905E68-3L	2CCA183148R0001		2.027	1
70 PLE 3L	1302	1256	1413835	ZLS905E70-3L	2CCA183150R0001		2.083	1
72 PLE 3L	1338	1292	1413859	ZLS905E72-3L	2CCA183152R0001		2.139	1
74 PLE 3L	1374	1328	1413873	ZLS905E74-3L	2CCA183154R0001		2.203	1
76 PLE 3L	1410	1364	1413897	ZLS905E76-3L	2CCA183156R0001		2.269	1
78 PLE 3L	1446	1400	1413910	ZLS905E78-3L	2CCA183158R0001		2.314	1
80 PLE 3L	1482	1436	1413934	ZLS905E80-3L	2CCA183160R0001		2.370	1

SMISSLINE TP plug-in system

Starter pack Touch proof 3LN – 125 A system

Starter Pack 3LN: L1, L2, L3, N inclusive socket end piece

For all starter pack the order of the 6 and 8 module sockets is like this:

Sequence(from Left to right):
All 8pole modules(Minus One) – All 6 pole modules – One 8 pole module

On some small busbar configurations there is only one 8 pole module present.
There we apply this sequence:
All 8pole modules – All 6 pole modules

Solutions available	Busbars length incl. Socket end piece	Busbars length	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	mm	mm	EAN	Type code	Order code		kg	pc.
18 PLE 3LN	364	320	1426521	ZLS905E18-3LN	2CCA183234R0001		0.615	1
20 PLE 3LN	401	355	1413248	ZLS905E20-3LN	2CCA183101R0001		0.724	1
22 PLE 3LN	437	391	1413262	ZLS905E22-3LN	2CCA183103R0001		0.789	1
24 PLE 3LN	473	427	1413286	ZLS905E24-3LN	2CCA183105R0001		0.800	1
26 PLE 3LN	509	463	1413408	ZLS905E26-3LN	2CCA183107R0001		0.926	1
28 PLE 3LN	545	499	1413422	ZLS905E28-3LN	2CCA183109R0001		0.970	1
30 PLE 3LN	581	535	1413446	ZLS905E30-3LN	2CCA183111R0001		1.046	1
32 PLE 3LN	617	571	1413460	ZLS905E32-3LN	2CCA183113R0001		1.120	1
34 PLE 3LN	653	607	1413484	ZLS905E34-3LN	2CCA183115R0001		1.193	1
36 PLE 3LN	689	643	1413507	ZLS905E36-3LN	2CCA183117R0001		1.2.57	1
38 PLE 3LN	725	679	1413521	ZLS905E38-3LN	2CCA183119R0001		1.322	1
40 PLE 3LN	761	715	1413545	ZLS905E40-3LN	2CCA183121R0001		1.387	1
42 PLE 3LN	797	751	1413569	ZLS905E42-3LN	2CCA183123R0001		1.459	1
44 PLE 3LN	833	787	1413583	ZLS905E44-3LN	2CCA183125R0001		1.524	1
46 PLE 3LN	869	823	1413606	ZLS905E46-3LN	2CCA183127R0001		1.589	1
48 PLE 3LN	905	859	1413620	ZLS905E48-3LN	2CCA183129R0001		1.653	1
50 PLE 3LN	941	896	1413644	ZLS905E50-3LN	2CCA183131R0001		1.726	1
52 PLE 3LN	977	932	1413668	ZLS905E52-3LN	2CCA183133R0001		1.791	1
54 PLE 3LN	1013	968	1413682	ZLS905E54-3LN	2CCA183135R0001		1.855	1
56 PLE 3LN	1049	1004	1413705	ZLS905E56-3LN	2CCA183137R0001		1.920	1
58 PLE 3LN	1058	1040	1413729	ZLS905E58-3LN	2CCA183139R0001		1.992	1
60 PLE 3LN	1122	1076	1413743	ZLS905E60-3LN	2CCA183141R0001		2.057	1
62 PLE 3LN	1158	1112	1413767	ZLS905E62-3LN	2CCA183143R0001		2.122	1
64 PLE 3LN	1194	1148	1413781	ZLS905E64-3LN	2CCA183145R0001		2.186	1
66 PLE 3LN	1230	1184	1413804	ZLS905E66-3LN	2CCA183147R0001		2.259	1
68 PLE 3LN	1266	1220	1413828	ZLS905E68-3LN	2CCA183149R0001		2.324	1
70 PLE 3LN	1302	1256	1413842	ZLS905E70-3LN	2CCA183151R0001		2.388	1
72 PLE 3LN	1338	1292	1413866	ZLS905E72-3LN	2CCA183153R0001		2.453	1
74 PLE 3LN	1374	1328	1413880	ZLS905E74-3LN	2CCA183155R0001		2.526	1
76 PLE 3LN	1410	1364	1413903	ZLS905E76-3LN	2CCA183157R0001		2.590	1
78 PLE 3LN	1446	1400	1413927	ZLS905E78-3LN	2CCA183159R0001		2.655	1
80 PLE 3LN	1482	1436	1413941	ZLS905E80-3LN	2CCA183161R0001		2.719	1
88 PLE 3LN	1626	1580	1498825	ZLS905E88-3LN	2CCA183237R0001		2975	**1**
98 PLE 3LN	1806	1760	1520304	ZLS905E98-3LN	2CCG001541R0001		3295	**1**

SMISSLINE TP plug-in system

Starter pack Touch proof 3L LA LB – 125 A system

Starter Pack 3LLALB: L1, L2, L3, LA, LB inclusive socket end piece

For all starter pack the order of the 6 and 8 module sockets is like this:

Sequence(from Left to right):
All 8pole modules(Minus One) – All 6 pole modules – One 8 pole module

On some small busbar configurations there is only one 8 pole module present.
There we apply this sequence:
All 8pole modules – All 6 pole modules

Solutions available	Busbars length incl. Socket end piece	Busbars length	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	mm	mm	EAN	Type code	Order code		kg	pc.
18 PLE 3L LA LB	364	320	1426538	ZLS905E18-3LLALB	2CCA183233R0001		0.586	1
20 PLE 3L LA LB	401	355	1416904	ZLS905E20-3LLALB	2CCA183162R0001		0.753	1
22 PLE 3L LA LB	437	391	1416911	ZLS905E22-3LLALB	2CCA183164R0001		0.821	1
24PLE 3L LA LB	473	427	1416928	ZLS905E24-3LLALB	2CCA183166R0001		0.835	1
26PLE 3L LA LB	509	463	1416935	ZLS905E26-3LLALB	2CCA183168R0001		0.964	1
28PLE 3L LA LB	545	499	1416942	ZLS905E28-3LLALB	2CCA183170R0001		1.011	1
30PLE 3L LA LB	581	535	1416959	ZLS905E30-3LLALB	2CCA183172R0001		1.107	1
32PLE 3L LA LB	617	571	1416966	ZLS905E32-3LLALB	2CCA183174R0001		1.167	1
34PLE 3L LA LB	653	607	1416973	ZLS905E34-3LLALB	2CCA183176R0001		1.242	1
36PLE 3L LA LB	689	643	1416980	ZLS905E36-3LLALB	2CCA183178R0001		1.310	1
38PLE 3L LA LB	725	679	1416997	ZLS905E38-3LLALB	2CCA183180R0001		1.377	1
40PLE 3L LA LB	761	715	1417000	ZLS905E40-3LLALB	2CCA183182R0001		1.445	1
42PLE 3L LA LB	797	751	1417017	ZLS905E42-3LLALB	2CCA183184R0001		1.520	1
44PLE 3L LA LB	833	787	1417024	ZLS905E44-3LLALB	2CCA183186R0001		1.588	1
46PLE 3L LA LB	869	823	1417031	ZLS905E46-3LLALB	2CCA183188R0001		1.656	1
48PLE 3L LA LB	905	859	1417048	ZLS905E48-3LLALB	2CCA183190R0001		1.723	1
50PLE 3L LA LB	941	896	1417055	ZLS905E50-3LLALB	2CCA183192R0001		1.799	1
52PLE 3L LA LB	977	932	1417062	ZLS905E52-3LLALB	2CCA183194R0001		1.866	1
54PLE 3L LA LB	1013	968	1417079	ZLS905E54-3LLALB	2CCA183196R0001		1.934	1
56PLE 3L LA LB	1049	1004	1417086	ZLS905E56-3LLALB	2CCA183198R0001		2.001	1
58PLE 3L LA LB	1058	1040	1417093	ZLS905E58-3LLALB	2CCA183200R0001		2.077	1
60PLE 3L LA LB	1122	1076	1417109	ZLS905E60-3LLALB	2CCA183202R0001		2.144	1
62PLE 3L LA LB	1158	1112	1417116	ZLS905E62-3LLALB	2CCA183204R0001		2.212	1
64PLE 3L LA LB	1194	1148	1417123	ZLS905E64-3LLALB	2CCA183206R0001		2.279	1
66PLE 3L LA LB	1230	1184	1417130	ZLS905E66-3LLALB	2CCA183208R0001		2.355	1
68PLE 3L LA LB	1266	1220	1417147	ZLS905E68-3LLALB	2CCA183210R0001		2.423	1
70 PLE 3L LA LB	1302	1256	1417154	ZLS905E70-3LLALB	2CCA183212R0001		2.490	1
72PLE 3L LA LB	1338	1292	1417161	ZLS905E72-3LLALB	2CCA183214R0001		2.558	1
74PLE 3L LA LB	1374	1328	1417178	ZLS905E74-3LLALB	2CCA183216R0001		2.633	1
76PLE 3L LA LB	1410	1364	1417185	ZLS905E76-3LLALB	2CCA183218R0001		2.701	1
78PLE 3L LA LB	1446	1400	1417192	ZLS905E78-3LLALB	2CCA183220R0001		2.768	1
80PLE 3L LA LB	1482	1436	1417208	ZLS905E80-3LLALB	2CCA183222R0001		2.836	1

SMISSLINE TP plug-in system

Starter pack Touch proof 3LN LA LB – 125 A system

Starter Pack 3LNLALB: L1, L2, L3, N, LA, LB inclusive socket end piece

For all starter pack the order of the 6 and 8 module sockets is like this:

Sequence(from Left to right):
All 8pole modules(Minus One) – All 6 pole modules – One 8 pole module

On some small busbar configurations there is only one 8 pole module present.
There we apply this sequence:
All 8pole modules – All 6 pole modules

Solutions available	Busbars length incl. Socket end piece mm	Busbars length mm	Bbn 761227 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
18 PLE 3LN LA LB	364	320	1426545	ZLS905E18-3LNLALB	2CCA183235R0001		0.671	1
20 PLE 3LN LA LB	401	355	1417215	ZLS905E20-3LNLALB	2CCA183163R0001		0.841	1
22 PLE 3LN LA LB	437	391	1417222	ZLS905E22-3LNLALB	2CCA183165R0001		0.917	1
24PLE 3LN LA LB	473	427	1417239	ZLS905E24-3LNLALB	2CCA183167R0001		0.939	1
26PLE 3LN LA LB	509	463	1417246	ZLS905E26-3LNLALB	2CCA183169R0001		1.078	1
28PLE 3LN LA LB	545	499	1417253	ZLS905E28-3LNLALB	2CCA183171R0001		1.133	1
30PLE 3LN LA LB	581	535	1417260	ZLS905E30-3LNLALB	2CCA183173R0001		1.238	1
32PLE 3LN LA LB	617	571	1417277	ZLS905E32-3LNLALB	2CCA183175R0001		1.306	1
34PLE 3LN LA LB	653	607	1417284	ZLS905E34-3LNLALB	2CCA183177R0001		1.391	1
36PLE 3LN LA LB	689	643	1417291	ZLS905E36-3LNLALB	2CCA183179R0001		1.467	1
38PLE 3LN LA LB	725	679	1417307	ZLS905E38-3LNLALB	2CCA183181R0001		1.543	1
40PLE 3LN LA LB	761	715	1417314	ZLS905E40-3LNLALB	2CCA183183R0001		1.619	1
42PLE 3LN LA LB	797	751	1417321	ZLS905E42-3LNLALB	2CCA183185R0001		1.704	1
44PLE 3LN LA LB	833	787	1417338	ZLS905E44-3LNLALB	2CCA183187R0001		1.780	1
46PLE 3LN LA LB	869	823	1417345	ZLS905E46-3LNLALB	2CCA183189R0001		1.856	1
48PLE 3LN LA LB	905	859	1417352	ZLS905E48-3LNLALB	2CCA183191R0001		1.933	1
50PLE 3LN LA LB	941	896	1417369	ZLS905E50-3LNLALB	2CCA183193R0001		2.017	1
52PLE 3LN LA LB	977	932	1417376	ZLS905E52-3LNLALB	2CCA183195R0001		2.093	1
54PLE 3LN LA LB	1013	968	1417383	ZLS905E54-3LNLALB	2CCA183197R0001		2.169	1
56PLE 3LN LA LB	1049	1004	1417390	ZLS905E56-3LNLALB	2CCA183199R0001		2.246	1
58PLE 3LN LA LB	1058	1040	1417406	ZLS905E58-3LNLALB	2CCA183201R0001		2.330	1
60PLE 3LN LA LB	1122	1076	1417413	ZLS905E60-3LNLALB	2CCA183203R0001		2.406	1
62PLE 3LN LA LB	1158	1112	1417505	ZLS905E62-3LNLALB	2CCA183205R0001		2.482	1
64PLE 3LN LA LB	1194	1148	1419172	ZLS905E64-3LNLALB	2CCA183207R0001		2.559	1
66PLE 3LN LA LB	1230	1184	1417420	ZLS905E66-3LNLALB	2CCA183209R0001		2.643	1
68PLE 3LN LA LB	1266	1220	1417437	ZLS905E68-3LNLALB	2CCA183211R0001		2.719	1
70 PLE 3LN LA LB	1302	1256	1417444	ZLS905E70-3LNLALB	2CCA183213R0001		2.796	1
72PLE 3LN LA LB	1338	1292	1417451	ZLS905E72-3LNLALB	2CCA183215R0001		2.872	1
74PLE 3LN LA LB	1374	1328	1417468	ZLS905E74-3LNLALB	2CCA183217R0001		2.956	1
76PLE 3LN LA LB	1410	1364	1417475	ZLS905E76-3LNLALB	2CCA183219R0001		3.032	1
78PLE 3LN LA LB	1446	1400	1417482	ZLS905E78-3LNLALB	2CCA183221R0001		3.109	1
80PLE 3LN LA LB	1482	1436	1417499	ZLS905E80-3LNLALB	2CCA183223R0001		3.185	1

SMISSLINE TP plug-in system
Socket

ZLS908

ZLS906

Socket bases ZLS906, ZLS908
The SMISSLINE socket system is a totally new kind of assembly and connection technology for the construction of distributions. Besides the classic method of snapping the devices onto 35-mm mounting rails, the new family of devices can be directly attached to the socket bases with integrated busbars. The time-consuming process of connecting up the supply is thereby no longer needed. In addition, in the event of rearrangement or expansion, the replacement of devices in existing systems is made significantly easier.
The socket sections and the wide range of accessories make it possible to plan with the capability for expansion and to construct distribution systems of any desired size in a short period of time.
6- and 8-module sockets are installed either by screwing them onto any flat surface or by snapping them onto a 35 mm DIN mounting rail. Lateral movement or detachment of the sockets again is possible before final fixing.
In order to determine the required socket length, the space necessary for
- the devices required
- the incoming terminal block and
- any reserve spaces needed must be determined.

Snap mounting
Pull down the slide with a screwdriver until it latches (socket can be moved).
Press on front of slid:
Fixed position
(Sockets fixed)

The key features
- System of any desired length (even number of poles)
- Integrated busbars
- Simple device change
- Long-term planning and problem free extension possible
- Significant time savings during assembly and connection

Socket base

Description/ application	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
8-module socket Length 144 mm (includes base and cover)	1413965	ZLS908	2CCA183030R0001		0.092	10
6-module socket Length 108 mm (includes base and cover)	1413958	ZLS906	2CCA183035R0001		0.071	10

Busbars for the sockets and additional socket ZLS200
The busbars of size 10 x 3 mm can be loaded with currents up to 125 A. They are plated for perfect contact with the devices plug-in contacts. The maximum available busbar length is

SMISSLINE TP plug-in system

Busbars, Socket end piece – 125 A system

ZLS20x

1979 mm. The same busbar type is used, regardless whether it is fitted in the socket (L1, L2, L3, N) or in the additional socket (N, PE). The busbars are inserted in to the socket from the front.

Auxiliary busbars for the socket ZLS202

The 5 x 2 mm auxiliary busbars are intended for a common power supply of auxiliary switches and signal contacts. They are also plated and their max. delivery length is 1979 mm.
Like the main busbars, the auxiliary busbars are inserted in holders LA and LB from the front. Of course, only on auxiliary busbar can be fitted.

Busbars for the sockets

Description/ application	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
125 A busbar plated, 10 x 3 mm, for L1, L2, L3, N and PE – Delivery length 1979 mm	0015702	ZLS200	2CCF002772R0001		0.640	10
40 A auxiliary busbar plated, 5 x 2 mm, for LA and LB – Delivery length 1979 mm	0015719	ZLS202	2CCF002773R0001		0.240	10

Socket end piece ZLS920

To prevent displacement of sockets and busbars (particulary when installed vertically) end pieces can be fitted at the start and finish of each row of sockets. These simultaneously ensure electrically protected covering of the busbar end faces and mechanical fixing of the sockets oh the mounting rail.

ZLS920

Socket end piece

Description/ application	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
To prevent displacement of sockets and busbars	1415617	ZLS920	2CCA183017R0001		0.060	1

Torque	1.3 Nm ± 0.1 11.4 lb.in ± 0.88

Incoming devices and terminals

Technical data IEC/EN 61439-6 and UL508

Incoming blocks

	ZLS26X	ZLS924	ZLS25X,95X
General data			
Standards	IEC/EN 61439-6	IEC/EN 61439-6, UL508	IEC/EN 61439-6, UL508
Rated voltage U_e acc. IEC	690 VAC, 1000 VDC	690 VAC, 1000 VDC	690 VAC, 1000 VDC
Rated Voltage acc. UL		600 VAC	600 VAC
Rated current In acc. IEC	63 A	160 A	200 A
Rated current In acc. UL		150 A	200 A
Rated conditional short-circuit current (Icc)	100 kA (415V)		
Installation			
Terminal rigid IEC connections (solid/stranded)	2,5 mm^2 to 25 mm^2 max. 1 wire	100 kA (415V) 10 mm^2 up to 50 mm^2 (3LN) 1.5 mm^2 up to 10 mm^2 (LA,LB) Multiple 3LN: – Multiple LA, LB: –	100 kA (415V) 10 mm^2 to 95 mm^2
Terminal flexible IEC connections	2,5 mm^2 to 25 mm^2 max. 1 wire flexible wire with ferrules	10 mm^2 up to 50 mm^2 single wire 1.5 mm^2 up to 10 mm^2 (LA,LB) single wire 2x25 mm^2 cable withe the same type and size Multiple LA, LB: –	10 mm^2 to 95 mm^2 flexible wire with ferrules
Other connections		Flat cable 9x2x0,8 up to 9x9x0,8 mm and 10x3 mm Busbar 10x3 mm combined with 10 mm^2 up to 25 mm^2 rigid or flexible IEC connections	10 mm^2 to 95 mm^2
Terminal rigid UL connections		Single: 8 up to 1/0 AWG, Cu only Multiple: –	2 AWG – 1/0 AWG
Torque	2.8 Nm	4.0 Nm (L,N); 1.5 Nm (LA, LB); 1.2 Nm Cover screw	2.0 Nm
Stripping length	13 mm	18 mm (L,N); 11 Nm (LA, LB)	21 mm

SMISSLINE TP plug-in system

Incoming terminal block and components – 125 A system

ZLS26x

ZLS25x



ZLS95x

Incoming terminal blocks ZLS260 to 262

Compact terminal block with the construction width of 18 mm for 2 poles. The maximum rated current is 63 A for L1, L2, L3N and 6 A for LA, LB.

Incoming terminal block 18 mm, 63 A 2,5 mm² to 25 mm² max. 1 wire

1 contact above 1 contact bottom

Version	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
L1, L3 63 A	0111572	ZLS260	2CCA205305R0001		0.090	1
L2, N 63 A	0111589	ZLS261	2CCA205306R0001		0.090	1
LA, LB 6 A	0111596	ZLS262	2CCA205307R0001		0.090	1

Incoming terminal component ZLS250-253; 954, 955

The incoming terminal component, with an installation width of 36 mm is available as a single-pole component for the line conductors L1, L2, L3 and as neutral. The terminals act directly on the busbars and thereby fix the incoming terminal component. The incoming terminal component, L1, L2, L3 and N can be combined to meet specific needs. A maximum cable cross-section of 95 mm² can be connected to the incoming terminal component.

Incoming terminal component 10 mm² to 95 mm² max. 1 wire

Version	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Feeder component L1	0505319	ZLS251	2CCV672501R0001		0.120	1
Feeder component L2	0505326	ZLS252	2CCV672502R0001		0.120	1
Feeder component L3	0505333	ZLS253	2CCV672503R0001		0.120	1
Feeder component N	0505340	ZLS250	2CCV672500R0001		0.120	1
Feeder component N additional socket	1424404	ZLS954	2CCV672508R0001		0.088	1
Feeder component PE additional socket	1487164	ZLS959	2CCA672510R0001		0.088	1
Feeder component N additional socket (2 holes)	1515348	ZLS954-1	2CCG001032R0001		0.088	1

SMISSLINE TP plug-in system

Incoming terminal block and components – 125 A system

Left Version ZLS924 --L

Right Version ZLS924 --R

Terminals of the left and right version of the Incoming block are turned.
Because of this there is no cable cross by connecting two SISSLINE rows (see picture)

General
The incoming terminal block is used to connect cables directly to the busbars. The terminals act directly on the busbars and therefore fix the incoming terminal block. Removable terminal tops permit the connection of continous conductrors (risers) white horizontal or vertical cable entry is also possible.
Instead of using the incoming terminal block, the power supply can also be realized via a device (e.g. residual current operated circuit breaker, miniature circuit breaker or switch disconnector).

Power supply left or right, maximum 125 A.

Power supply in centre, maximum 160 A.
A maximum of 125 A is permitted on either side. A total of 160 A shall not be exceeded.

Incoming terminal blocks ZLS924
A standard incoming terminal block whose cover provides protection against accidental contact. Construction height 50 mm. The base plate can be fitted with a maximum of 4 main terminals L1, L2, L3 and N for the busbars, and 2 auxiliary terminals LA and LB for the auxiliary busbars.

SMISSLINE TP plug-in system

Incoming terminal block and components

Incoming terminal blocks 6 mm² to 50 mm² (2 × 25 mm²) + 2 × 10 mm² (LA, LB)

Version	Module	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
50 mm² (2×25 mm²) 3L left	4	1503086	ZLS924-3L	2CCF181816R0001		0.140	1
50 mm² (2×25 mm²) 3L+N left	4	1503093	ZLS924-3LN	2CCF181818R0001		0.168	1
50 mm² (2×25 mm²) 3L+N+LA+LB left	4	1503109	ZLS924-3LNAB	2CCF181820R0001		0.188	1
50 mm² (2×25 mm²) 3L right	4	1503116	ZLS924-3L-R	2CCF181817R0001		0. 140	1
50 mm² (2×25 mm²) 3L+N right	4	1503123	ZLS924-3LN-R	2CCF181819R0001		0.168	1
50 mm² (2×25 mm²) 3L+N+LA+LB right	4	1503130	ZLS924-3LNAB-R	2CCF181821R0001		0.188	1

Terminals for incoming block

Version	Module	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
Terminal L	–	1503147	ZLS936	2CCF181805R0001		0.028	1
Terminal LA LB	–	1503154	ZLS937	2CCF181807R0001		0.010	1

Cover for incoming terminal block

Version	Module	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
	4	1503161	ZLS939	2CCF181812R0001		0.026	1

SMISSLINE TP plug-in system

Terminals for additional socket – 125 A system

ZLS928

ZLS926

Additional socket

The additional socket can easily be fitted onto the socket base to accomodate the external N and/or PE busbars. This enables neutral connections to be made where single-pole miniature circuit breakers are used with unswitched neutral. Neutral terminals are clipped onto the additional socket and can be used as detachable neutral connections. One N busbar and/or one PE busbar can be fitted. Each socket base can be equipped with an additional socket. Because it contains an integrated 35 mm DIN-rail snap-on feature, the external N or PE busbars can be fitted anywhere in the distribution panel, even separate from the system. The additional sockets can be covered to prevent accidental contact with live parts.

Additional socket for external N and PE busbars

Description/ application	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
8-module socket (suitable for 8-module socket)	1420444	ZLS928	2CCA183630R0001		0.034	10
6-module socket (suitable for 6-module socket)	1420437	ZLS926	2CCA183635R0001		0.026	10

Incoming terminals

Technical data IEC/EN 61439-6 and UL508

Terminals

	10 mm² IEC ZLS918, ZLS919	10 mm² UL ZLS918UL, ZLS919UL	35 mm² IEC ZLS913, ZLS916, ZLS929	35 mm² UL ZLS913UL, ZLS929UL	95 mm² IEC ZLS954, ZLS959	95 mm² UL ZLS954UL, ZLS959UL
General data						
Standards	IEC/EN 61439-6	UL 508 CSA C22.2 No. 14-13	IEC/EN 61439-6	UL 508 CSA C22.2 No. 14-13	IEC/EN 61439-6	UL 508 CSA C22.2 No. 14-13
Rated voltage Ue acc. IEC	690 VAC, 1000 VDC	–	690 VAC, 1000 VDC	–	690 VAC, 1000 VDC	–
Rated voltage acc. UL	–	600 VAC	–	600 VAC	–	600 VAC
Rated current In acc. IEC	32 A	–	100 A	–	200 A	–
Rated current acc. UL	–	32 A	–	63 A	–	150 A
Installation						
Terminal rigid IEC connections (solid/stranded)	Single: 1 … 10 mm² Multiple: 2 x 1.5 … 2.5 mm², with cables of same type and size	–	–	–	–	–
Terminal flexible IEC connections	Single: 0.7 … 10 mm² Multiple: 2 x 1.5 … 2.5 mm², with cables of same type and size	–	Single: 16 … 35 mm² Multiple: –	–	Single: 10 … 95 mm² Multiple: 2 x 10 … 25 mm², with cables of same type and size	–
Terminal UL connections	–	Single: 14 … 8 AWG Multiple: –	–	Single: 6 … 2 AWG Multiple: –	–	Single: 2 … 1/0 AWG Multiple: –
Torque	1.2 Nm	1.2 Nm	2.5 Nm	2.5 Nm	2.0 Nm	2.0 Nm
Stripping length:	12 mm	12 mm	15 mm	15 mm	21 mm	21 mm

SMISSLINE TP plug-in system

Terminals TP, additional socket (use for ZLS926/928 and ZLSP926/926)

IEC N terminal

IEC PE terminal



d.c.terminals

Isolator

N terminals and PE terminals

Corresponding N terminals (blue) or PE terminals (yellow-green) are available for the power supply and the outgoing conduetors of the external N and PE busbars for cross sections. The terminals are fitted with label holders which can be used with the marking adapter or the self-adhesive marking label (Phoenix Contact type Clipline UC-TM):

Connection for the terminals

ZLS918, 919	0.75 mm² up to 10 mm² litz wire with ferrule 1 mm² up to 10 mm² strand 2 x 1.5 mm² or 2 x 2.5 mm² allowed, all other combinatins it is only allowed with one wire
ZLS913, 929	16 mm² up to 35 mm² wire with ferrule, max. 1 wire
ZLS954, 959	50 mm² up to 95 mm² wire with ferrule, max. 1 wire

N terminal for additional socket light blue, for external busbars

Description/ application	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
N 10 mm²	1487027	ZLS918	2CCA183440R0001		0.012	Set à 10
N 35 mm²	1421304	ZLS913	2CCA183470R0001		0.030	10
N 95 mm²	1424404	ZLS954	2CCV672508R0001		0.100	1
N 95 mm² two holes	1515348	ZLS954-1	2CCG001032R0001		0.100	1

PE terminal for additional socket yellow-green, for external busbars

Description/ application	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
PE 10 mm²	1487041	ZLS919	2CCA183441R0001		0.012	Set à 10
PE 35 mm²	1486921	ZLS929	2CCA183387R0001		0.030	10
PE 95 mm²	1487164	ZLS959	2CCA672510R0001		0.100	1

Red/orange terminals for additional socket

Description/ application	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
10 mm²	1487089	ZLS918/Red	2CCA183443R0001		0.012	10
10 mm²	1487102	ZLS919/Orange	2CCA183444R0001		0.012	10
35 mm²	1421342	ZLS913/Red	2CCA183465R0001		0.030	10
35 mm²	1421366	ZLS916/Orange	2CCA183466R0001		0.030	10

Insulator block

The dark grey insulator block isolates the interrupted bus bar ends from one another and simultaneously marks the disconnection point externally.

Description/ application	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	1487065	ZLS927	2CCA183442R0001		0.006	10

SMISSLINE TP plug-in system

Terminal range UL (use for 125A system ZLS926/928)

UL N terminal



UL PE terminal

Isolator

Connection for the terminals

ZLS918UL, 919UL 0.75 mm² up to 10 mm² litz wire with ferrule 1 mm² up to 10 mm² strand 2x1.5 mm² or 2x2.5 mm² allowed, all other combinations it is only allowed with one wire

ZLS913UL, 929UL 16 mm² up to 35 mm² wire with ferrule, max. 1 wire

ZLS954UL, 959UL 50 mm² up to 95 mm² wire with ferrule, max. 1 wire

Terminal range UL for additional socket or the 125A system (use on ZLS926/928).
The 250A additional (ZLSP926 and ZLSP928) socket has no UL approbation.
The use for this terminals is only for the 125A system.

N terminal for additional socket light grey, for external busbars

Description/ application	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
N 10 mm² max. 8AWG	1493301	ZLS918UL	2CCA183446R0001	0.5	0.011	1
N 35 mm² max. 2AWG	1486945	ZLS913UL	2CCA183398R0001	1	0.030	1
N 95 mm² max. 1/0AWG	1487188	ZLS954UL	2CCA672511R0001	2	0.088	1

PE terminal for additional socket grey-green, for external busbars

Description/ application	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
		Type code	Order code			
	EAN				kg	pc.
PE 10 mm² max. 8AWG	1487140	ZLS919UL	2CCA183447R0001	0.5	0.011	1
PE 35 mm² max. 2AWG	1486969	ZLS929UL	2CCA183399R0001	1	0.030	1
PE 95 mm² max. 1/0AWG	1487201	ZLS959UL	2CCA672512R0001	2	0.088	1

Insulator block

The dark grey insulator block isolates the interrupted bus bar ends from one another and simultaneously marks the disconnection point externally.

Description/ application	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
dark gray, to isolate the N bus bar on the additional socket	1487065	ZLS927	2CCA183442R0001	0.5	0.009	1

SMISSLINE TP plug-in system

Socket accessories

Dummy housing

Isolator



Cover

Intermediate piece ZLS725

The light grey intermediate piece matches the device profile and fills empty module spaces. The busbars are safely covered, so that they cannot be touched and at the same time the corresponding openings in the cover are closed up.

Intermediate piece

Description/ application	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
light grey, fills shock-proof empty module spaces 18 mm – bag containing 5 items	0100989	ZLS725	2CCS500900R0181		0.100	1
Compensation piece to 18 mm for NT 9 mm – bag containing 5 items	0104710	ZLS728	2CCS400900R0101		0.070	1

Busbar insulator ZLS938

The dark grey busbar insulator electrically isolates the separated busbar ends from each other (e.g. when using several RCD protected groups) and also identifies the isolation point from outside. It conforms with the device profile and it requires 1 module space.

Busbar insulator

dark grey, for isolation and spacing of separate busbar sections, 18 mm	1418205	ZLS938	2CCA205611R0001		0.001	1

Busbar cover ZLS100

If component modules or spare modules are not required, the busbar cover ensures electrically protected covering of the main and auxiliary busbars. The cover (4 modules) can be cut anywhere.

Busbar cover

electrically protected covering of main and auxiliary busbars. The 4 modules cover can be divided. Suitable to accept extension adapter ZLS 101 4 x 18 mm – bag containing 5 items	0015603	ZLS100	2CCF002762R0001		0.095	1

Extension adapter ZLS101

The extension adapter, single or several side by side, can be plugged into the busbar cover via the built-in holding device. This enables conventional DIN devices with 45 mm cap size to be snapped onto the SMISSLINE socket. By plugging in several extension adapters one on top of the other, heights can be adjusted in multiples of 7 mm

Add-on adapter

18 mm wide, can be plugged on busbar cover ZLS100. To mount conventional DIN devices with 45 m cap size. – bag containing 10 items	0015610	ZLS101	2CCF002763R0001		0.002	10

SMISSLINE TP plug-in system

Combi modules adapter for manual motor starter and DIN adapters
Technical data IEC/EN 61439-6 and UL508

	ZMS132 Combi Module	ZMS 930 Adapter	ZLS970 DIN Adapter
Standards	IEC/EN 61439-6, UL508	IEC/EN 61439-6, UL508	IEC/EN 61439-6, UL508
Rated voltage Ue acc.IEC acc. IEC	690 VAC, 440 V DC	690 VAC, 440 V DC	690 VAC, 440 V DC
Rated Voltage acc. UL	600 V AC	600 V AC	600 V AC
Rated current In acc.. IEC	32A	32A	32A, 63AMaximum rated current of outgoing circuits (Inc) max. 50 A for S800 with ZLS972X, ZLS973X.
Rated current In acc. UL	30A	30A	30A, 60A

The following combination can be placed on the combi modules

Direct-On-Line Starters
MS116
BEA16-4
AF09, AF12, AF16

MS116 up to 16A
BEA26-4
AF26, AF30, AF38

MS116 > 16A
BEA38-4
AF26, AF30, AF38

MS132
BEA16-4
AF09, AF12, AF16

MS132 up to 10A
BEA26-4
AF26, AF30, AF38

MS132 > 10A
BEA38-4
AF26, AF30, AF38

Reversing Starters
MS116
BEA16-4, BER16-4, VEM4
AF09, AF12, AF16

MS116 up to 16A
BEA26-4, BER38-4, VEM4
AF26, AF30, AF38

MS116 > 16A
BEA38-4, BER38-4, VEM4
AF26, AF30, AF38

MS132
BEA16-4, BER16-4, VEM4
AF09, AF12, AF16

MS132 up to 10A
BEA26-4, BER38-4, VEM4
AF26, AF30, AF38

MS132 > 10A
BEA38-4, BER38-4, VEM4
AF26, AF30, AF38

SMISSLINE TP plug-in system

Combi module 32 A (LN), 6 A (LA, LB)
MS116/132 + AF contactor

Combi module for manual motor starter plus adapter plus contactor

	Description/ application	Bbn 761227 EAN	Order details		Pack unit	Module	Weight 1 piece kg
			Type code	Order code			
Combi module for wires top feed	L1,L2,L3	1414641	ZMS132-3L	2CCA182500R0001	1	2.5	0.095
	L1,L2,L3,LA	1414634	ZMS132-3LA	2CCA182502R0001	1	2.5	0.098
	L1,L2,L3,LB	1414627	ZMS132-3LB	2CCA182504R0001	1	2.5	0.098
	L1, L2,L3, LA, LB	1414610	ZMS132-3LAB	2CCA182506R0001	1	2.5	0.102
Modules for wire bottom feed	L1,L2,L3	1503208	ZMS132-3LWB	2CCF182543R0001	1	2.5	0.105
Module for manual motor starter MS132 K Push-in terminals wires top feed	L1, L2, L3	1503178	ZMS132-3L-PI	2CCF182540R0001	1	2.5	0.105
	L1, L2, L2,LB	1503185	ZMS132-3LB-PI	2CCF182541R0001	1	2.5	0.118
	L1, L2, L2,LA,LB	1503192	ZMS132-3LAB-PI	2CCF182542R0001	1	2.5	0.136
Module without wires, Spare parts	Combi module without wires	1414603	ZMS137	2CCA182508R0001	1	2.5	0.075
	Intermediate piece 9mm	1414412	ZMS935	2CCA182616R0001	1	2.5	0.007
	Connection pin to mount 2 combi modules together	1414801	E210-SPV	2CCC703715R0001	Set of 30 pcs.		0.01

Combi module

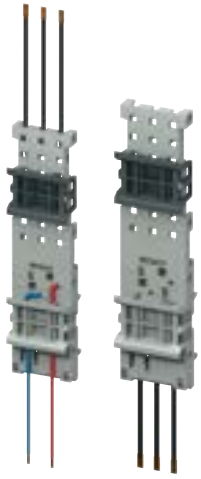

Combi module push in

SMISSLINE TP plug-in system

Combi module 32 A (L, N), 6 A (LA, LB)

MS116/132 + AFZ contactor for DC Control supply

ZMS-132AFZ

Adapter solution for SMISSLNE TP and Manual motor starter with AF09Z-30-10-30 and AF38Z-30-00-30, built on the SMISSLINE combi module

How build up the DC Control motor protection solution:

Step 1: select ZMS132 combi module (see previous page)

Step 2: The DIN clip needs to be replaced with ZMS-132AFZ (2CCG002095R0001)

Step 3: Chose the contactor (AF09Z-30-10-30 or AF38Z-30-00-30) and the manual motor starter MS116 (0.10...32 A) or MS132 (0.10...32 A) or MO132 (0.16...32 A)

Step 4: Choose the connector for contactor and MS BEA16-4 for AF09Z-30-10-30 and BEA38-4 for AF38Z-30-00-30

Combi module for manual motor starter plus adapter plus contactor

Description/ application	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
DIN clip for ZMS132	1526542	ZMS-132AFZ	2CCG002095R0001	2.5	0.007	1

SMISSLINE TP plug-in system

Adapter for manual motor starter

Adapter for manual motor starter plus adapter plus contactor

Adapter for MS116 and MS132 wire bottom feed	Bbn 761227 EAN	Order details		Pack unit	Module	Weight 1 piece kg
		Type code	Order code			
L1, L2, L3	1414597	ZMS930	2CCA182520R0001	1	2.5	0.053
L1, L2, L3, LA, LB	1414580	ZMS931	2CCA182522R0001	1	2.5	0.062
L1,L2,L,3,LA	1424619	ZMS936	2CCA182521R0001	1	2.5	0.058
Adapter for MS116 and MS132 wires top feed						
L1, L2, L3	1414573	ZMS932	2CCA182524R0001	1	2.5	0.053
L1, L2, L3, LA, LB	1414566	ZMS933	2CCA182526R0001	1	2.5	0.062
L1,L2,L3,LA	1424626	ZMS937	2CCA182525R0001	1	2.5	0.058
Adapter for manual motor starter MS132 K Push-in terminals wires						
L1,L2,L3 wires bottom	1503215	ZMS930-PI	2CCF182550R0001	1	2.5	0.058
L1,L2,L3 wires top	1503208	ZMS932-PI	2CCF182551R0001	1	2.5	0.058
Adapter MS116 and MS132 without wires, Spare parts						
Adapter for MS without wires	1414559	ZMS934	2CCA182512R0001	1	2.5	0.034
Intermediate piece 9mm	1414412	ZMS935	2CCA182616R0001	1	2.5	0.007
Adapter for AF contactor no wires	1414542	ZMS938	2CCA182510R0001		2.5	0.0034
Connection pin to mount 2 combi modules together	1414801	E210-SPV	2CCC703715R0001	Set of 30 pces		0.01

Top feed **Bottom feed**

E210-SPV

SMISSLINE TP plug-in system

Locking device

SA

Locking device for S400, F402, F404, FS401, FS403

Designation	Bbn 401223	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Padlock adapter 3 mm – Bag containing 10 items	3587605	SA 1	GJF1101903R0001		0.023	1
Padlock set. Locking devices with 2 keys	3587704	SA 2	GJF1101903R0002		0.020	1

SMISSLINE TP plug-in system

DIN-rail adapters 32 A and 63 A

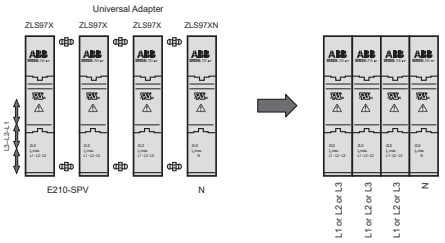

Multipole DIN adapter can plugged together with single adapters and the connection piece E210SPV.

Adapters can be used on the 125A or on the 250A busbar system.

DIN adapter 32A

DIN adapter 63A

Example DIN adapter

32 A and 63 A DIN-rail adapters

Adapter 32A

Designation	Module	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
		EAN	Type code	Order code		kg	pc.
L1/L2/L3 wire top	1	144 4563	ZLS970	2CCA180551R0001		0.020	1
L1/L2/L3 wire bottom	1	144 4570	ZLS971	2CCA180552R0001		0.020	1
N wire top	1	144 4587	ZLS970N	2CCA180553R0001		0.020	1
N wire bottom	1	144 4570	ZLS971N	2CCA180554R0001		0.020	1

Adapter 63A

L1/L2/L3 wire top	1	144 4709	ZLS972	2CCA180555R0001	0.024	1
L1/L2/L3 wire bottom	1	144 4716	ZLS973	2CCA180556R0001	0.024	1
N wire top	1	144 4808	ZLS972N	2CCA180557R0001	0.024	1
N wire bottom	1	144 4730	ZLS973N	2CCA180558R0001	0.024	1

Adapter 32A with 300mm wire

L1/L2/L3 wire top	1	144 4747	ZLS970300	2CCA180559R0001	0.026	1
L1/L2/L3 wire bottom	1	144 4754	ZLS971300	2CCA180560R0001	0.026	1
N wire top	1	144 4761	ZLS970N300	2CCA180561R0001	0.026	1
N wire bottom	1	144 4778	ZLS971N300	2CCA180562R0001	0.026	1

Adapter 63A with 300mm wire

L1/L2/L3	1	144 4785	ZLS972300	2CCA180563R0001	0.037	1
L1/L2/L3	1	144 4792	ZLS973300	2CCA180564R0001	0.037	1
N wire top	1	144 4808	ZLS972N300	2CCA180565R0001	0.037	1
N wire bottom	1	144 4815	ZLS973N300	2CCA180566R0001	0.037	1

Dummy housing

	1	144 4556	ZLS964	2CCA180550R0001	0.011	1

Connector for multi- pole adapter

Bag with 30 pcs. 10 2 connectors are needed to connect 2 adapters	1414801	E210-SPV	2CCC703715R0001	0.050	Set of 30 pcs.

SMISSLINE TP plug-in system

DIN-rail adapters - 27mm wide Solution for S800

Simple mounting S800 MCB on SMISSLINE TP system with 27mm width DIN-rail adapter. Assembly to plug-in socket system with DIN-rail adapter and S800. Maximum rated current of outgoing circuits (Inc) max. 50A for S800 with ZLS972X, ZLS973X.

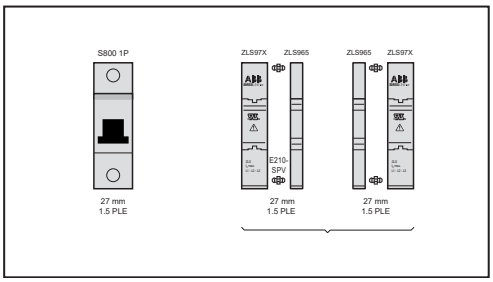

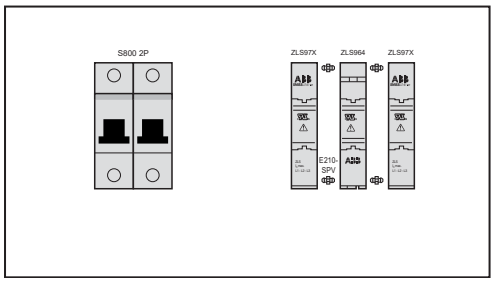

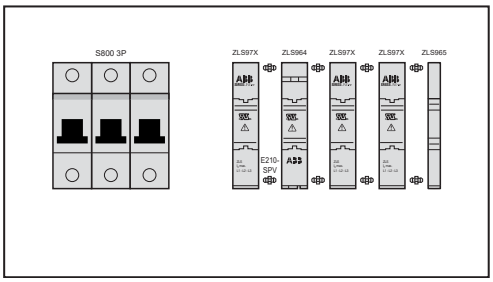

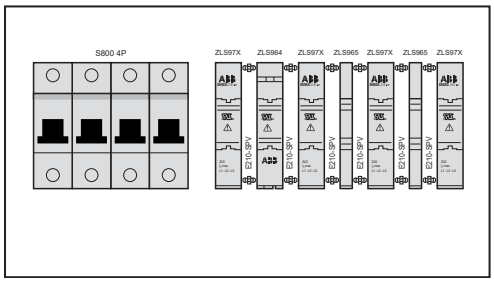

9mm dummy housing

Description	Bbn 761227	Order details		Module	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
9mm width	1501440	ZLS965	2CCA180545R1001	0.5	0.005	Set of 5

SMISSLINE TP plug-in system

Busbars 40 A and 125 A

40 A and 125 A busbars / selection table for sockets

Bbn 761227 EAN	Order details busbar 125 A Type code	Order code	Price 1 piece	ZL S908	ZL S906	Mod.	Length incl. end piece	Busbar length mm	Bbn 761227 EAN	Order details busbar 40 A Type code	Order code	Price 1 piece
0016778	ZLS201E6	2CCF800158R0001		–	1	6	148	103	007966	ZLS203E6	2CCF800218R0001	
0016983	ZLS201E8	2CCF800159R0001		1	–	8	186	139	008178	ZLS203E8	2CCF800219R0001	
0016211	ZLS201E12	2CCF800160R0001		–	2	12	256	211	007409	ZLS203E12	2CCF800220R0001	
0016310	ZLS201E14	2CCF800161R0001		1	1	14	292	247	007508	ZLS203E14	2CCF800221R0001	
0016334	ZLS201E16	2CCF800162R0001		2	–	16	328	283	007522	ZLS203E16	2CCF800222R0001	
0016358	ZLS201E18	2CCF800163R0001		–	3	18	364	319	007546	ZLS203E18	2CCF800223R0001	
0016372	ZLS201E20	2CCF800164R0001		1	2	20	401	355	007560	ZLS203E20	2CCF800224R0001	
0016396	ZLS201E22	2CCF800165R0001		2	1	22	437	391	007584	ZLS203E22	2CCF800225R0001	
0016419	ZLS201E24	2CCF800666R0001		3	–	24	473	427	007607	ZLS203E24	2CCF800226R0001	
0016433	ZLS201E26	2CCF800167R0001		1	3	26	509	463	007621	ZLS203E26	2CCF800227R0001	
0016457	ZLS201E28	2CCF800168R0001		2	2	28	545	499	007645	ZLS203E28	2CCF800228R0001	
0016471	ZLS201E30	2CCF800169R0001		3	1	30	581	535	007669	ZLS203E30	2CCF800229R0001	
0016495	ZLS201E32	2CCF800170R0001		4	–	32	617	571	007683	ZLS203E32	2CCF800230R0001	
0016518	ZLS201E34	2CCF800171R0001		2	3	34	653	607	007706	ZLS203E34	2CCF800231R0001	
0016532	ZLS201E36	2CCF800172R0001		3	2	36	689	643	007720	ZLS203E36	2CCF800232R0001	
0016556	ZLS201E38	2CCF800173R0001		4	1	38	725	679	007744	ZLS203E38	2CCF800233R0001	
0016570	ZLS201E40	2CCF800174R0001		5	–	40	761	715	007768	ZLS203E40	2CCF800234R0001	
0016594	ZLS201E42	2CCF800175R0001		3	3	42	797	751	007782	ZLS203E42	2CCF800235R0001	
0016617	ZLS201E44	2CCF800176R0001		4	2	44	833	787	007805	ZLS203E44	2CCF800236R0001	
0016631	ZLS201E46	2CCF800177R0001		5	1	46	869	823	007829	ZLS203E46	2CCF800237R0001	
0016655	ZLS201E48	2CCF800178R0001		6	–	48	905	859	007843	ZLS203E48	2CCF800238R0001	
0016679	ZLS201E50	2CCF800179R0001		4	3	50	941	895	007867	ZLS203E50	2CCF800239R0001	
0016693	ZLS201E52	2CCF800180R0001		5	2	52	977	932	007881	ZLS203E52	2CCF800240R0001	
0016716	ZLS201E54	2CCF800181R0001		6	1	54	1013	968	007904	ZLS203E54	2CCF800241R0001	
0016730	ZLS201E56	2CCF800182R0001		7	–	56	1049	1004	007928	ZLS203E56	2CCF800242R0001	
0016754	ZLS201E58	2CCF800183R0001		5	3	58	1085	1040	007942	ZLS203E58	2CCF800243R0001	
0016785	ZLS201E60	2CCF800184R0001		6	2	60	1122	1076	007973	ZLS203E60	2CCF800244R0001	
0016808	ZLS201E62	2CCF800185R0001		7	1	62	1158	1112	007997	ZLS203E62	2CCF800245R0001	
0016822	ZLS201E64	2CCF800186R0001		8	–	64	1194	1148	008017	ZLS203E64	2CCF800246R0001	
0016846	ZLS201E66	2CCF800187R0001		6	3	66	1230	1184	008031	ZLS203E66	2CCF800247R0001	
0016860	ZLS201E68	2CCF800188R0001		7	2	68	1266	1220	008055	ZLS203E68	2CCF800248R0001	
0016884	ZLS201E70	2CCF800189R0001		8	1	70	1302	1256	008079	ZLS203E70	2CCF800249R0001	
0016907	ZLS201E72	2CCF800190R0001		9	–	72	1338	1292	008093	ZLS203E72	2CCF800250R0001	
0016921	ZLS201E74	2CCF800191R0001		7	3	74	1374	1328	008116	ZLS203E74	2CCF800251R0001	
0016945	ZLS201E76	2CCF800192R0001		8	2	76	1410	1364	008130	ZLS203E76	2CCF800252R0001	
0016969	ZLS201E78	2CCF800193R0001		9	1	78	1446	1400	008154	ZLS203E78	2CCF800253R0001	
0016990	ZLS201E80	2CCF800194R0001		10	–	80	1482	1436	008185	ZLS203E80	2CCF800254R0001	
0017010	ZLS201E82	2CCF800195R0001		8	3	82	1518	1472	008208	ZLS203E82	2CCF800255R0001	
0017034	ZLS201E84	2CCF800196R0001		9	2	84	1554	1508	008222	ZLS203E84	2CCF800256R0001	
0017058	ZLS201E86	2CCF800197R0001		10	1	86	1590	1544	008246	ZLS203E86	2CCF800257R0001	
0017072	ZLS201E88	2CCF800198R0001		11	–	88	1626	1580	008260	ZLS203E88	2CCF800258R0001	
0017096	ZLS201E90	2CCF800199R0001		9	3	90	1662	1616	008284	ZLS203E90	2CCF800259R0001	
0017119	ZLS201E92	2CCF800200R0001		10	2	92	1698	1652	008307	ZLS203E92	2CCF800260R0001	
0017133	ZLS201E94	2CCF800201R0001		11	1	94	1734	1688	008321	ZLS203E94	2CCF800261R0001	
0017157	ZLS201E96	2CCF800202R0001		12	–	96	1770	1724	008345	ZLS203E96	2CCF800262R0001	
0017171	ZLS201E98	2CCF800203R0001		10	3	98	1806	1760	008369	ZLS203E98	2CCF800263R0001	
0016006	ZLS201E100	2CCF800204R0001		11	2	100	1843	1796	007195	ZLS203E100	2CCF800264R0001	
0016020	ZLS201E102	2CCF800205R0001		12	1	102	1879	1832	007218	ZLS203E102	2CCF800265R0001	
0016044	ZLS201E104	2CCF800206R0001		13	–	104	1915	1868	007232	ZLS203E104	2CCF800266R0001	
0016068	ZLS201E106	2CCF800207R0001		11	3	106	1951	1904	007256	ZLS203E106	2CCF800267R0001	
0016082	ZLS201E108	2CCF800208R0001		12	2	108	1987	1940	007270	ZLS203E108	2CCF800268R0001	

Planning for the incorporation of feeder block and spare places should be taken into account.
The total lengths given above were calculated taking socket spacings and tolerances into account.
For this reason, the indicated busbar length is not necessarily a multiple of 18 mm (1 Module).

SMISSLINE TP plug-in system

Technical data according to IEC/EN 61439-6

Power Bar System 250 A

Busbar system touch proof:
Use only for wall mounted application (horizontal or vertical). When installed correctly the requirements of EN/IEC 61439-2 are met.

Number of poles	30 to 110 3p+N / 2 additional bars PE+N
Rated operational voltage (U_e)	690 VAC, 440 VDC (415 V for LA, LB busbars)
Rated insulation voltage (U_i) Main circuit	690 VAC, 440 VDC
Rated insulation voltage (U_i) Auxiliry circuit	415 VAC
IP Code	IP20B
Mounting position	horizontal or vertical
Overvoltage category	IV
Pollution degree	3 (690 V a.c.) 2 (1000 V d.c.)
Rated impulse voltage (U_{imp})	8 kV mainbusbars; 6 KV auxillary busbars
Rated current of the assembly (I_{nA})	Main circuit: 250 A (side feeding), Auxiliary circuit: 40 A
Rated current of a circuit (I_{nc})	Main circuit: max 250 A, Auxiliary circuit: max 40 A
Rated short-time withstand current (I_{cw})	Main circuit: 15 kA / 100 ms, Auxiliary circuit: 4 kA / 50 ms
Rated peak withstand current (I_{pk})	Main circuit: 30 kA, Auxiliary circuit: 6 kA
Rated frequency (f)	50/60 Hz
Rated conditional short-circuit current (I_{cc})	see table below
Ambient air temperature	max. 60°C
Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30	1 cycle with 55 °C/90…96 % and 25 °C/95…100 %
Size of CU bars 3P+N+PE	3×25 mm (75 mm²)
Size of CU auxiliary bars La Lb	2×5 mm (10 mm²)
Resistance and reactance values Busbar ZLSP1250	R 0.325mΩ/m X 0.295mΩ/m

250A System Rated Voltage (U_e) Main busbar (L1, L2, L3, N)	**Rated conditional short-circuit current (I_{cc})**	**Short circuit protection device (SCPD)**
U_e AC 415 V	100kA	Protective Device Fuse NH1 (I_{nA}: 200 A)
U_e AC 690 V	25kA	Protective Device Fuse NH1 (I_{nA}: 200 A)
U_e AC 415 V	100kA	Protective Device XT4 (I_{nA}: 250 A)
U_e AC 690 V	25kA	Protective Device XT4 (I_{nA}: 250 A)
U_e AC 415 V	50kA	Protective Device XT3 (I_{nA}: 250 A)
U_e AC 690 V	6kA	Protective Device XT3 (I_{nA}: 250 A)
U_e AC 415 V	100kA	Protective Device XT2 (I_{nA}: 160 A)
U_e AC 690 V	18kA	Protective Device XT2 (I_{nA}: 160 A)
U_e AC 415 V	70kA	Protective Device XT1 (I_{nA}: 160 A)
U_e AC 690 V	10kA	Protective Device XT1 (I_{nA}: 160 A)
U_e AC 415 V	50kA	Protective Device Series S800 (I_{nA}: 125 A)
U_e AC 690 V	4.5kA	Protective Device Series S800 (I_{nA}: 125 A)
Auxiliary busbar (LA, LB)		
U_e AC 240 V	100kA	Protective Device Fuse (I_{nA}: 40 A)
U_e AC 415 V	100kA	Protective Device Fuse (I_{nA}: 40 A)
U_e AC 240 V	50kA	Protective Device Series S800 (I_{nA}: 40 A)
U_e AC 415 V	5kA	Protective Device Series S800 (I_{nA}: 40 A)
U_e AC 240 V	15kA	Protective Device Series S400 (I_{nA}: 40 A)
U_e AC 240 V	15kA	Protective Device Series S200 (I_{nA}: 40 A)

SMISSLINE TP plug-in system

Technical data data UL508; Approvals for US and CA: cULus
Busbar system 250 A

SMISSLINE TP system for UL 508 – Industrial Control Equipment, CSA C22.2 No. 14 – Industrial Control Equipment UL File E222110

Rated Voltage	600 VAC
Rated Current	250 A left or right
Short Circuit Ratings ABB T_{max} XT2, XT4	50 kA, max. 480 VAC, 480 Y/277 V and 240 VAC or 35 kA, max. 600 VAC and 600 Y/347 V

Technical data UL508 Industrial Control Equipment (ZLSP906, ZLSP908, ZLSP920, ZLSP921, ZLSP926, ZLSP928)

	Busbar ZLSP200	Feeder ZLSP934	Feeder block ZLS95X	Combimodule ZLS840X, 842X	DIN Rail adapter ZLS97X	Terminals ZLS95XUL, 91XUL	Combi modul ZMS132X	Adapter moter starter ZMS93X
Maximum rated voltage	600 VAC	600 VAC	600 VAC	600 VAC	600 VAC	600 VAC	600 VAC	600 VAC
Maximum rated current	250 A	250 A	150 A	30 A	32 A, 63 A	32 A, 100 A, 150 A	32 A	32 A

SMISSLINE TP plug-in system

Starter pack Touch proof 3L
Power Bar System 250 A

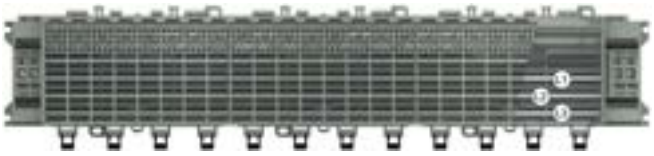

Starter pack Touch proof 3L Busbar system 250 A

For all starter pack the order of the 6 and 8 module sockets is like this:

Sequence(from Left to right):
All 8pole modules(Minus One) – All 6 pole modules – One 8 pole module

On some small busbar configurations there is only one 8 pole module present.
There we apply this sequence:
All 8pole modules – All 6 pole modules

Solutions available	Busbars length incl. Socket end piece mm	Bbn 761227 EAN	Order details		Pack unit	Weight 1 piece kg
			Type code	Order code		
30 modules 3L	607	1488246	ZLSP950E30-3L	2CCF212200A0001	1	1,755
32 modules 3L	643	1488260	ZLSP950E32-3L	2CCF212201A0001	1	1,863
34 modules 3L	679	1488284	ZLSP950E34-3L	2CCF212202A0001	1	1,981
36 modules 3L	715	1488307	ZLSP950E36-3L	2CCF212203A0001	1	2,088
38 modules 3L	751	1488321	ZLSP950E38-3L	2CCF212204A0001	1	2,195
40 modules 3L	787	1488345	ZLSP950E40-3L	2CCF212205A0001	1	2,303
42 modules 3L	823	1488369	ZLSP950E42-3L	2CCF212206A0001	1	2,421
44 modules 3L	859	1488383	ZLSP950E44-3L	2CCF212207A0001	1	2,528
46 modules 3L	895	1488406	ZLSP950E46-3L	2CCF212208A0001	1	2,635
48 modules 3L	931	1488420	ZLSP950E48-3L	2CCF212209A0001	1	2,742
50 modules 3L	967	1488444	ZLSP950E50-3L	2CCF212210A0001	1	2,861
52 modules 3L	1003	1488468	ZLSP950E52-3L	2CCF212211A0001	1	2,968
54 modules 3L	1039	1488482	ZLSP950E54-3L	2CCF212212A0001	1	3,075
56 modules 3L	1075	1488505	ZLSP950E56-3L	2CCF212213A0001	1	3,182
58 modules 3L	1111	1488529	ZLSP950E58-3L	2CCF212214A0001	1	3,301
60 modules 3L	1147	1488543	ZLSP950E60-3L	2CCF212215A0001	1	3,408
62 modules 3L	1183	1488567	ZLSP950E62-3L	2CCF212216A0001	1	3,515
64 modules 3L	1219	1488581	ZLSP950E64-3L	2CCF212217A0001	1	3,622
66 modules 3L	1255	1488604	ZLSP950E66-3L	2CCF212218A0001	1	3,741
68 modules 3L	1291	1488628	ZLSP950E68-3L	2CCF212219A0001	1	3,848
70 modules 3L	1327	1488642	ZLSP950E70-3L	2CCF212220A0001	1	3,955
72 modules 3L	1363	1488666	ZLSP950E72-3L	2CCF212221A0001	1	4,062
74 modules 3L	1399	1488680	ZLSP950E74-3L	2CCF212222A0001	1	4,18
76 modules 3L	1435	1488703	ZLSP950E76-3L	2CCF212223A0001	1	4,288
78 modules 3L	1471	1488727	ZLSP950E78-3L	2CCF212224A0001	1	4,395
80 modules 3L	1507	1488741	ZLSP950E80-3L	2CCF212225A0001	1	4,502
82 modules 3L	1543	1488765	ZLSP950E82-3L	2CCF212226A0001	1	4,62
84 modules 3L	1579	1488789	ZLSP950E84-3L	2CCF212227A0001	1	4,728
86 modules 3L	1615	1488802	ZLSP950E86-3L	2CCF212228A0001	1	4,835
88 modules 3L	1651	1488826	ZLSP950E88-3L	2CCF212229A0001	1	4,942
90 modules 3L	1687	1488840	ZLSP950E90-3L	2CCF212230A0001	1	5,06
92 modules 3L	1723	1488864	ZLSP950E92-3L	2CCF212231A0001	1	5,167
94 modules 3L	1759	1488888	ZLSP950E94-3L	2CCF212232A0001	1	5,275
96 modules 3L	1795	1488901	ZLSP950E96-3L	2CCF212233A0001	1	5,382
98 modules 3L	1831	1488925	ZLSP950E98-3L	2CCF212234A0001	1	5,5
100 modules 3L	1867	1488949	ZLSP950E100-3L	2CCF212235A0001	1	5,607
102 modules 3L	1903	1488963	ZLSP950E102-3L	2CCF212236A0001	1	5,715
104 modules 3L	1939	1488987	ZLSP950E104-3L	2CCF212237A0001	1	5,822
106 modules 3L	1975	1489007	ZLSP950E106-3L	2CCF212238A0001	1	5,94
108 modules 3L	2011	1489021	ZLSP950E108-3L	2CCF212239A0001	1	6,047
110 modules 3L	2047	1489045	ZLSP950E110-3L	2CCF212240A0001	1	6,121

SMISSLINE TP plug-in system

Starter pack Touch proof 3LN
Power Bar System 250 A

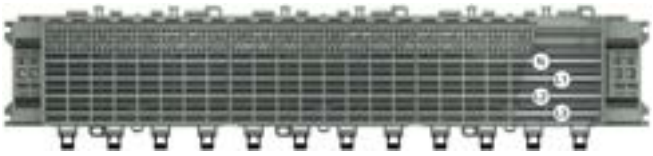

Starter pack Touch proof 3LN Busbar system 250 A

For all starter pack the order of the 6 and 8 module sockets is like this:

Sequence(from Left to right):
All 8pole modules(Minus One) – All 6 pole modules – One 8 pole module

On some small busbar configurations there is only one 8 pole module present.
There we apply this sequence:
All 8pole modules – All 6 pole modules

Solutions available	Busbars length incl. Socket end piece mm	Bbn 761227 EAN	Order details		Pack unit	Weight 1 piece kg
			Type code	Order code		
30 modules 3LN	607	1489069	ZLSP950E30-3LN	2CCF212300A0001	1	2,122
32 modules 3LN	643	1489083	ZLSP950E32-3LN	2CCF212301A0001	1	2,253
34 modules 3LN	679	1489106	ZLSP950E34-3LN	2CCF212302A0001	1	2,396
36 modules 3LN	715	1489120	ZLSP950E36-3LN	2CCF212303A0001	1	2,527
38 modules 3LN	751	1489144	ZLSP950E38-3LN	2CCF212304A0001	1	2,659
40 modules 3LN	787	1489168	ZLSP950E40-3LN	2CCF212305A0001	1	2,791
42 modules 3LN	823	1489182	ZLSP950E42-3LN	2CCF212306A0001	1	2,933
44 modules 3LN	859	1489205	ZLSP950E44-3LN	2CCF212307A0001	1	3,065
46 modules 3LN	895	1489229	ZLSP950E46-3LN	2CCF212308A0001	1	3,197
48 modules 3LN	931	1489243	ZLSP950E48-3LN	2CCF212309A0001	1	3,328
50 modules 3LN	967	1489267	ZLSP950E50-3LN	2CCF212310A0001	1	3,471
52 modules 3LN	1003	1489281	ZLSP950E52-3LN	2CCF212311A0001	1	3,603
54 modules 3LN	1039	1489304	ZLSP950E54-3LN	2CCF212312A0001	1	3,734
56 modules 3LN	1075	1489328	ZLSP950E56-3LN	2CCF212313A0001	1	3,866
58 modules 3LN	1111	1489342	ZLSP950E58-3LN	2CCF212314A0001	1	4,008
60 modules 3LN	1147	1489366	ZLSP950E60-3LN	2CCF212315A0001	1	4,14
62 modules 3LN	1183	1489380	ZLSP950E62-3LN	2CCF212316A0001	1	4,272
64 modules 3LN	1219	1489403	ZLSP950E64-3LN	2CCF212317A0001	1	4,403
66 modules 3LN	1255	1489427	ZLSP950E66-3LN	2CCF212318A0001	1	4,546
68 modules 3LN	1291	1489441	ZLSP950E68-3LN	2CCF212319A0001	1	4,678
70 modules 3LN	1327	1489465	ZLSP950E70-3LN	2CCF212320A0001	1	4,809
72 modules 3LN	1363	1489489	ZLSP950E72-3LN	2CCF212321A0001	1	4,941
74 modules 3LN	1399	1489502	ZLSP950E74-3LN	2CCF212322A0001	1	5,084
76 modules 3LN	1435	1489526	ZLSP950E76-3LN	2CCF212323A0001	1	5,215
78 modules 3LN	1471	1489540	ZLSP950E78-3LN	2CCF212324A0001	1	5,347
80 modules 3LN	1507	1489564	ZLSP950E80-3LN	2CCF212325A0001	1	5,478
82 modules 3LN	1543	1489588	ZLSP950E82-3LN	2CCF212326A0001	1	5,621
84 modules 3LN	1579	1489601	ZLSP950E84-3LN	2CCF212327A0001	1	5,753
86 modules 3LN	1615	1489625	ZLSP950E86-3LN	2CCF212328A0001	1	5,884
88 modules 3LN	1651	1489649	ZLSP950E88-3LN	2CCF212329A0001	1	6,016
90 modules 3LN	1687	1489663	ZLSP950E90-3LN	2CCF212330A0001	1	6,159
92 modules 3LN	1723	1489687	ZLSP950E92-3LN	2CCF212331A0001	1	6,29
94 modules 3LN	1759	1489700	ZLSP950E94-3LN	2CCF212332A0001	1	6,422
96 modules 3LN	1795	1489724	ZLSP950E96-3LN	2CCF212333A0001	1	6,554
98 modules 3LN	1831	1489748	ZLSP950E98-3LN	2CCF212334A0001	1	6,696
100 modules 3LN	1867	1489762	ZLSP950E100-3LN	2CCF212335A0001	1	6,828
102 modules 3LN	1903	1489786	ZLSP950E102-3LN	2CCF212336A0001	1	6,959
104 modules 3LN	1939	1489809	ZLSP950E104-3LN	2CCF212337A0001	1	7,091
106 modules 3LN	1975	1489823	ZLSP950E106-3LN	2CCF212338A0001	1	7,234
108 modules 3LN	2011	1489847	ZLSP950E108-3LN	2CCF212339A0001	1	7,365
110 modules 3LN	2047	1489861	ZLSP950E110-3LN	2CCF212340A0001	1	7,463

SMISSLINE TP plug-in system

Starter pack Touch proof 3LN LA LB
Power Bar System 250 A

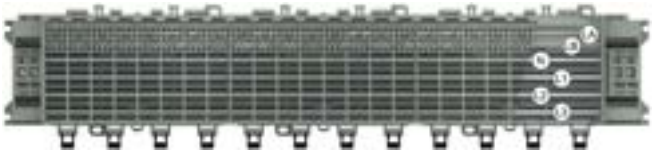

Starter pack Touch proof 3LNLALB Busbar system 250 A

For all starter pack the order of the 6 and 8 module sockets is like this:

Sequence(from Left to right):
All 8pole modules(Minus One) – All 6 pole modules – One 8 pole module

On some small busbar configurations there is only one 8 pole module present.
There we apply this sequence:
All 8pole modules – All 6 pole modules

Solutions available	Busbars length incl. Socket end piece mm	Bbn 761227 EAN	Order details		Pack unit	Weight 1 piece kg
			Type code	Order code		
30 modules 3LN LA LB	607	1489885	ZLSP950E30-3LNLALB	2CCF212400A0001	1	2,48
32 modules 3LN LA LB	643	1489908	ZLSP950E32-3LNLALB	2CCF212401A0001	1	2,611
34 modules 3LN LA LB	679	1489922	ZLSP950E34-3LNLALB	2CCF212402A0001	1	2,754
36 modules 3LN LA LB	715	1489946	ZLSP950E36-3LNLALB	2CCF212403A0001	1	2,885
38 modules 3LN LA LB	751	1489960	ZLSP950E38-3LNLALB	2CCF212404A0001	1	3,017
40 modules 3LN LA LB	787	1489984	ZLSP950E40-3LNLALB	2CCF212405A0001	1	3,149
42 modules 3LN LA LB	823	1490003	ZLSP950E42-3LNLALB	2CCF212406A0001	1	3,291
44 modules 3LN LA LB	859	1490027	ZLSP950E44-3LNLALB	2CCF212407A0001	1	3,423
46 modules 3LN LA LB	895	1490041	ZLSP950E46-3LNLALB	2CCF212408A0001	1	3,555
48 modules 3LN LA LB	931	1490065	ZLSP950E48-3LNLALB	2CCF212409A0001	1	3,686
50 modules 3LN LA LB	967	1490089	ZLSP950E50-3LNLALB	2CCF212410A0001	1	3,829
52 modules 3LN LA LB	1003	1490102	ZLSP950E52-3LNLALB	2CCF212411A0001	1	3,961
54 modules 3LN LA LB	1039	1490126	ZLSP950E54-3LNLALB	2CCF212412A0001	1	4,092
56 modules 3LN LA LB	1075	1490140	ZLSP950E56-3LNLALB	2CCF212413A0001	1	4,224
58 modules 3LN LA LB	1111	1490164	ZLSP950E58-3LNLALB	2CCF212414A0001	1	4,366
60 modules 3LN LA LB	1147	1490188	ZLSP950E60-3LNLALB	2CCF212415A0001	1	4,498
62 modules 3LN LA LB	1183	1490201	ZLSP950E62-3LNLALB	2CCF212416A0001	1	4,63
64 modules 3LN LA LB	1219	1490225	ZLSP950E64-3LNLALB	2CCF212417A0001	1	4,761
66 modules 3LN LA LB	1255	1490249	ZLSP950E66-3LNLALB	2CCF212418A0001	1	4,904
68 modules 3LN LA LB	1291	1490263	ZLSP950E68-3LNLALB	2CCF212419A0001	1	5,036
70 modules 3LN LA LB	1327	1490287	ZLSP950E70-3LNLALB	2CCF212420A0001	1	5,167
72 modules 3LN LA LB	1363	1490300	ZLSP950E72-3LNLALB	2CCF212421A0001	1	5,299
74 modules 3LN LA LB	1399	1490324	ZLSP950E74-3LNLALB	2CCF212422A0001	1	5,442
76 modules 3LN LA LB	1435	1490348	ZLSP950E76-3LNLALB	2CCF212423A0001	1	5,573
78 modules 3LN LA LB	1471	1490362	ZLSP950E78-3LNLALB	2CCF212424A0001	1	5,705
80 modules 3LN LA LB	1507	1490386	ZLSP950E80-3LNLALB	2CCF212425A0001	1	5,836
82 modules 3LN LA LB	1543	1490409	ZLSP950E82-3LNLALB	2CCF212426A0001	1	5,979
84 modules 3LN LA LB	1579	1490423	ZLSP950E84-3LNLALB	2CCF212427A0001	1	6,111
86 modules 3LN LA LB	1615	1490447	ZLSP950E86-3LNLALB	2CCF212428A0001	1	6,242
88 modules 3LN LA LB	1651	1490461	ZLSP950E88-3LNLALB	2CCF212429A0001	1	6,374
90 modules 3LN LA LB	1687	1490485	ZLSP950E90-3LNLALB	2CCF212430A0001	1	6,517
92 modules 3LN LA LB	1723	1490508	ZLSP950E92-3LNLALB	2CCF212431A0001	1	6,648
94 modules 3LN LA LB	1759	1490522	ZLSP950E94-3LNLALB	2CCF212432A0001	1	6,78
96 modules 3LN LA LB	1795	1490546	ZLSP950E96-3LNLALB	2CCF212433A0001	1	6,912
98 modules 3LN LA LB	1831	1490560	ZLSP950E98-3LNLALB	2CCF212434A0001	1	7,054
100 modules 3LN LA LB	1867	1490584	ZLSP950E100-3LNLALB	2CCF212435A0001	1	7,186
102 modules 3LN LA LB	1903	1490607	ZLSP950E102-3LNLALB	2CCF212436A0001	1	7,317
104 modules 3LN LA LB	1939	1490621	ZLSP950E104-3LNLALB	2CCF212437A0001	1	7,449
106 modules 3LN LA LB	1975	1490645	ZLSP950E106-3LNLALB	2CCF212438A0001	1	7,592
108 modules 3LN LA LB	2011	1490669	ZLSP950E108-3LNLALB	2CCF212439A0001	1	7,723
110 modules 3LN LA LB	2047	1490683	ZLSP950E110-3LNLALB	2CCF212440A0001	1	7,821

SMISSLINE TP plug-in system

Sockets and Incoming components

Power Bar System 250 A

ZLSP906

ZLSP908

Socket base

Description	Bbn 761227 EAN	Order details		Pack unit	Moduls (1 PLE 18mm)	Weight 1 piece kg
		Type code	Order code			
6-module socket Length 108 mm (includes base and cover)	1487324	ZLSP906	2CCF212053A0001	10	6	0.113
8-module socket Length 144 mm (includes base and cover)	1487300	ZLSP908	2CCF212052A0001	10	8	0.147

ZLSP1250

Busbars for the sockets

Description	Bbn 761227 EAN	Order details		Pack unit	Moduls (1 PLE 18mm)	Weight 1 piece kg
		Type code	Order code			
250 A busbar plated, 25 x 3 mm, for L1, L2, L3, N and PE – Delivery length 1979 mm	1488222	ZLSP1250	2CCF212100M0110	1	110	0.1343
40 A auxiliary busbar plated, 5 x 2 mm, for LA and LB – Delivery length 1979 mm	0015719	ZLS202	2CCF002773R0001	10	110	0.240

ZLSP920

ZLSP921

Socket end piece

Description	Bbn 761227 EAN	Order details		Pack unit	Moduls (1 PLE 18mm)	Weight 1 piece kg
		Type code	Order code			
End piece main socket ZLSP906 or ZLSP908	1487386	ZLSP920	2CCF212082A0001	1	2	0.103
End piece additional socket ZLSP926 or ZLSP928	1487409	ZLSP921	2CCF212085A0001	1	2	0.54

Incoming terminal component

50 mm² up to 120 mm² flex wire with ferrule, max. 1 wire

10 mm²–25 mm² 2 wires with ferrule

Description	Bbn 761227 EAN	Order details		Pack unit	Moduls (1 PLE 18mm)	Weight 1 piece kg
		Type code	Order code			
Feeder component N	1490782	ZLSP250	2CCV672600R0001	1	2	0.112
Feeder component L1	1490805	ZLSP251	2CCV672601R0001	1	2	0.112
Feeder component L2	1490829	ZLSP252	2CCV672602R0001	1	2	0.112
Feeder component L3	1490843	ZLSP253	2CCV672603R0001	1	2	0.112
Feeder component N additional socket	1490867	ZLSP954	2CCV672608R0001	1	2	0.1
Feeder component N additional socket (2 holes)	1452797	ZLSP954-1	2CCG000034R0001	1	2	0.1
Feeder component PE additional socket	1490881	ZLSP959	2CCV672609R0001	1	2	0.1

ZLSP25x

ZLSP95x

SMISSLINE TP plug-in system

Incoming bolt on 250A

Technical data IEC/EN 61439-6 and UL508

ZLSP934-3LN

ZLSP934-3L-1

ZLSP934-3LN-R

ZLSP934-3L-R

ZLSP935-8NPE

ZLSP935-8PE_L_PE

ZLSP935-8NPE-R

ZLSP935-8PE-R_PE

	ZLSP934 and 935	ZLSP25X,ZLSP95X
Standards	IEC/EN 61439-6 and UL508	IEC/EN 61439-6, UL508
Rated voltage Ue acc. IEC acc. IEC	690 VAC	690 VAC
Rated Voltage acc. UL	600 V AC	-
Rated current In acc.. IEC	250 A	250 A
Rated current In acc. UL	250 A (short circuit protection 250 A Circuit-Breaker (DIVQ/7) 50 kA (480 V); 35 kA (600 V))	-
Wire size IEC connections	Cable: 50 mm² up to 150 mm²; no flat cable Ring lug M8 (for example Klauke 9SG8 for 120mm² or 10SG8 for 150mm²)	35–120 mm2 one flexible wire with ferrule10–25 mm2 one or two flexible wire with ferrule
Wire size UL connections	4/0 AWG – 250 kcmil	-
Torque	8 NmCover 1,2 Nm	ZLSP250–253 2,5 NmZLSP954, 959 2,0 NmCover 1,2 Nm
Stripping length	Ring lug M8; Width: max 22 mm	21mm

SMISSLINE TP plug-in system

Incoming bolt-on solution

Power Bar System 250 A

ZLSP934 x

ZLSP935 x

ZLSP934 x and ZLSP935 x

ZLSP963

ZLSP963N-N

ZLSP964

Connection can be done with ring lug like Klauke 9SG8 for 120mm² or 10SG8 for 150mm².
Connection of two socket rows is possible.

Main socket

Description	Bbn 761227	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Incoming terminal block 3L 8PLE left 250A	1506124	ZLSP934-3L-1	2CCG000036R0001		0.438	1
Incoming terminal block 3L+N 8PLE left 250A	1506148	ZLSP934-3LN	2CCG000038R0001		0.528	1
Incoming terminal block 3L 8PLE right 250A	1506155	ZLSP934-3L-R-1	2CCG000039R0001		0.438	1
Incoming terminal block 3L+N 8PLE right 250A	1506179	ZLSP934-3LN-R	2CCG000041R0001		0.528	1
Additional socket - This solution is only possible to mount on a ZLSP928 (not on ZLSP926, ZLS926, ZLS928).						
Incoming terminal block additional socket N PE left 250A 8PLE	1506186	ZLSP935-8NPE	2CCG000042R0001		0.268	1
Incoming terminal block additional socket PE left 250A 8PLE	1506193	ZLSP935-8PE	2CCG000043R0001		0.178	1
Incoming terminal block additional socket N PE right 250A 8PLE	1506223	ZLSP935-8NPE-R	2CCG000046R0001		0.268	1
Incoming terminal block additional socket PE right 250A 8PLE	1506230	ZLSP935-8PE-R	2CCG000047R0001		0.178	1
Covers for ZLSP934						
Cover for Incoming terminal block 250A (only for replacement)	1506278	ZLSP963	2CCG000051R0001		0.018	1
Cover an connection N-N 250A Connection to wire N from main socket to additional socket. Can only use for M8 120 mm2. Feeding is only possible form the main socket side.	1506261	ZLSP963N-N	2CCG000050R0001		0.074	1
Cover for connection with the cables on one terminal	1507541	ZLSP964	2CCG000207R0001		0.034	4

SMISSLINE TP plug-in system

Additional socket

Power Bar System 250 A

Additional socket

The additional socket can easily be fitted onto the socket base to accommodate the external N and/or PE busbars. This enables neutral connections to be made where single-pole miniature circuit breakers are used with unswitched neutral. Neutral terminals are clipped onto the additional socket and can be used as detachable neutral connections. One N busbar and/or one PE busbar can be fitted. Each socket base can be equipped with an additional socket.

ZLSP928

ZLSP926

Additional socket for external N and PE busbars

Description	Bbn 761227 EAN	Order details		Pack unit	Moduls (1 PLE 18mm)	Weight 1 piece kg
		Type code	Order code			
– 8-module socket (suitable for 8-module socket)	1487348	ZLSP928	2CCF212060A0001	10	8	0.67
– 6-module socket (suitable for 6-module socket)	1487362	ZLSP926	2CCF212061A0001	10	6	0.53

ZLS938

Busbar insulator

Description	Bbn 761227 EAN	Order details		Pack unit	Moduls (1 PLE 18mm)	Weight 1 piece kg
		Type code	Order code			
dark grey, 20 for isolation and spacing of separate busbar sections, 18 mm	148205	ZLS938	2CCA205611R0001	1	1	0.1

ZLSP906

Busbar cover

Description	Bbn 761227 EAN	Order details		Pack unit	Moduls (1 PLE 18mm)	Weight 1 piece kg
		Type code	Order code			
electrically protected covering of main and auxiliary busbars. The 4 modules cover can be divided. Suitable to accept extension adapter ZLS 101 4x18 mm – bag containing 5 items	0015603	ZLS100	2CCF002762R0001	1	1	0.95

ZLSP906

Din rail clip

Description	Bbn 761227 EAN	Order details		Pack unit	Moduls (1 PLE 18mm)	Weight 1 piece kg
		Type code	Order code			
Din rail clip ZLSP926 and ZLSP928. This item is need if the additional socket will be mounted on a DIN rail. 1 pcs. every 30 cm.	498306	ZLSP937	2CCA212012R0001	Bag of 5		0.18

SMISSLINE TP plug-in system

Busbars Power Bar System 250 A and 40 A

250 A and 40 A busbars / selection table for sockets

Order data busbar 250A	ABB IT number	EAN number 761227	ZLSP908	ZLSP906	Pack unit	Moduls (1 PLE 18mm)	Weight in grams	Busbar length in mm	Order data busbar 40A	Order code	EAN number 761227
ZLSP1250E30	2CCF212100M0030	148 7423	3	1	1	30	366	535	ZLS203E30	2CCF800229R0001	0017669
ZLSP1250E32	2CCF212100M0032	148 7447	4	–	1	32	391	571	ZLS203E32	2CCF800230R0001	0017683
ZLSP1250E34	2CCF212100M0034	148 7461	2	3	1	34	415	607	ZLS203E34	2CCF800231R0001	0017706
ZLSP1250E36	2CCF212100M0036	148 7485	3	2	1	36	439	643	ZLS203E36	2CCF800232R0001	0017720
ZLSP1250E38	2CCF212100M0038	148 7508	4	1	1	38	464	679	ZLS203E38	2CCF800233R0001	0017744
ZLSP1250E40	2CCF212100M0040	148 7522	5	–	1	40	488	715	ZLS203E40	2CCF800234R0001	0017768
ZLSP1250E42	2CCF212100M0042	148 7546	3	3	1	42	513	751	ZLS203E42	2CCF800235R0001	0017782
ZLSP1250E44	2CCF212100M0044	148 7560	4	2	1	44	537	787	ZLS203E44	2CCF800236R0001	0017805
ZLSP1250E46	2CCF212100M0046	148 7584	5	1	1	46	561	823	ZLS203E46	2CCF800237R0001	0017829
ZLSP1250E48	2CCF212100M0048	148 7607	6	–	1	48	586	859	ZLS203E48	2CCF800238R0001	0017843
ZLSP1250E50	2CCF212100M0050	148 7621	4	3	1	50	610	895	ZLS203E50	2CCF800239R0001	0017867
ZLSP1250E52	2CCF212100M0052	148 7645	5	2	1	52	635	932	ZLS203E52	2CCF800240R0001	0017881
ZLSP1250E54	2CCF212100M0054	148 7669	6	1	1	54	659	968	ZLS203E54	2CCF800241R0001	0017904
ZLSP1250E56	2CCF212100M0056	148 7683	7	–	1	56	683	1004	ZLS203E56	2CCF800242R0001	0017928
ZLSP1250E58	2CCF212100M0058	148 7706	5	3	1	58	708	1040	ZLS203E58	2CCF800243R0001	0017942
ZLSP1250E60	2CCF212100M0060	148 7720	6	2	1	60	732	1076	ZLS203E60	2CCF800244R0001	0017973
ZLSP1250E62	2CCF212100M0062	148 7744	7	1	1	62	757	1112	ZLS203E62	2CCF800245R0001	0017997
ZLSP1250E64	2CCF212100M0064	148 7768	8	–	1	64	781	1148	ZLS203E64	2CCF800246R0001	0018017
ZLSP1250E66	2CCF212100M0066	148 7782	6	3	1	66	806	1184	ZLS203E66	2CCF800247R0001	0018031
ZLSP1250E68	2CCF212100M0068	148 7805	7	2	1	68	830	1220	ZLS203E68	2CCF800248R0001	0018055
ZLSP1250E70	2CCF212100M0070	148 7829	8	1	1	70	854	1256	ZLS203E70	2CCF800249R0001	0018079
ZLSP1250E72	2CCF212100M0072	148 7843	9	–	1	72	879	1292	ZLS203E72	2CCF800250R0001	0018093
ZLSP1250E74	2CCF212100M0074	148 7867	7	3	1	74	903	1328	ZLS203E74	2CCF800251R0001	0018116
ZLSP1250E76	2CCF212100M0076	148 7881	8	2	1	76	928	1364	ZLS203E76	2CCF800252R0001	0018130
ZLSP1250E78	2CCF212100M0078	148 7904	9	1	1	78	952	1400	ZLS203E78	2CCF800253R0001	0018154
ZLSP1250E80	2CCF212100M0080	148 7928	10	–	1	80	976	1436	ZLS203E80	2CCF800254R0001	0018185
ZLSP1250E82	2CCF212100M0082	148 7942	8	3	1	82	1001	1472	ZLS203E82	2CCF800255R0001	0018208
ZLSP1250E84	2CCF212100M0084	148 7966	9	2	1	84	1025	1508	ZLS203E84	2CCF800256R0001	0018222
ZLSP1250E86	2CCF212100M0086	148 7980	10	1	1	86	1050	1544	ZLS203E86	2CCF800257R0001	0018246
ZLSP1250E88	2CCF212100M0088	148 8000	11	–	1	88	1074	1580	ZLS203E88	2CCF800258R0001	0018260
ZLSP1250E90	2CCF212100M0090	148 8024	9	3	1	90	1098	1616	ZLS203E90	2CCF800259R0001	0018284
ZLSP1250E92	2CCF212100M0092	148 8048	10	2	1	92	1123	1652	ZLS203E92	2CCF800260R0001	0018307
ZLSP1250E94	2CCF212100M0094	148 8062	11	1	1	94	1147	1688	ZLS203E94	2CCF800261R0001	0018321
ZLSP1250E96	2CCF212100M0096	148 8086	12	–	1	96	1172	1724	ZLS203E96	2CCF800262R0001	0018345
ZLSP1250E98	2CCF212100M0098	148 8109	10	3	1	98	1196	1760	ZLS203E98	2CCF800263R0001	0018369
ZLSP1250E100	2CCF212100M0100	148 8123	11	2	1	100	1220	1796	ZLS203E100	2CCF800264R0001	0017195
ZLSP1250E102	2CCF212100M0102	148 8147	12	1	1	102	1245	1832	ZLS203E102	2CCF800265R0001	0017218
ZLSP1250E104	2CCF212100M0104	148 8161	13	–	1	104	1269	1868	ZLS203E104	2CCF800266R0001	0017232
ZLSP1250E106	2CCF212100M0106	148 8185	11	3	1	106	1294	1904	ZLS203E106	2CCF800267R0001	0017256
ZLSP1250E108	2CCF212100M0108	148 8208	12	2	1	108	1318	1940	ZLS203E108	2CCF800268R0001	0017270

Planning for the incorporation of feeder block and spare places should be taken into account.
The total lengths given above were calculated taking socket spacings and tolerances into account.
For this reason, the indicated busbar length is not necessarily a multiple of 18 mm (1 Module).

SMISSLINE TP plug-in system

Busbar system 250 A

Direct feed to plug-in circuit-breaker Tmax XT4

The direct feed starter pack solution allows a direct connection from the 250A Power Bar System to the Installation for plug-in circuit-breaker Tmax XT4 Moulded Case Circuit Breaker. Lower part for plug-in for Tmax XT4, 3 pole (1SDA068196R1) or 4 pole (1SDA066283R1) is needed.
For fixed XT4 version a conversion kit for moving part plug-in is needed additional. 3pole (1SDA066282R1) and 4 pole (1SDA066283R1).
The solution is built for a vertical design. The additional heat sink part is helpful to reduce the heat on the system.

Direct Feed 250A

Number of poles	32 to 80 3L + 3LN/2 additional bars PE+N
Rated operational voltage (U_e)	690 VAC, 440 VDC
Rated insulation voltage (U_i)	690 VAC, 440 VDC
IP Code	IP20B
Pollution degree	3 (690 V a.c.) 2 (440 V d.c.)
Rated impulse voltage (U_{imp})	8 kV (L1L2L3N)
Rated current of the assembly (I_{nA})	250 A
Rated current of a circuit (I_{nc})	max 250 A
Rated short-time withstand current (I_{cw})	15 kA / 100 ms
Rated peak withstand current (I_{pk})	30 kA
Rated frequency (f)	50/60 Hz
Rated conditional short-circuit current (I_{cc}): see table below	
Ambient air temperature	max. 60 °C
Size of CU bars 3P+N+PE	3 x 25 mm (75 mm²)
Size of CU auxiliary bars La Lb	2 x 5 mm (10 mm²)
Environmental conditions (damp heat)	1 cycle with 55 °C/90...96 % and 25 °C/95...100 %

Voltage (VAC)	Rated conditional short-circuit current (I_{cc})	Incoming current of main busbars (L1, L2, L3, N)	Short circuit protection device (SCPD)
415 V	100 kA	250 A	ABB Tmax XT4 250 A
690 V	25 kA	250 A	

Technical data data UL508; Approvals for US and CA: cULus
Direct Feed 250A

SMISSLINE TP system for UL 508 – Industrial Control Equipment, CSA C22.2 No. 14 – Industrial Control Equipment UL File E222110	Control Equipment UL File E222110
UL Rated Voltage	600 VAC
UL Rated Current (End Feed)	250 A
UL Short Circuit Rating	50 kA (480 V), 35 kA (600 V) with XT4 250 A

SMISSLINE TP plug-in system

Direct Feed Touch proof 3L and 3LN Power Bar System 250 A

Ordering data

Left Version
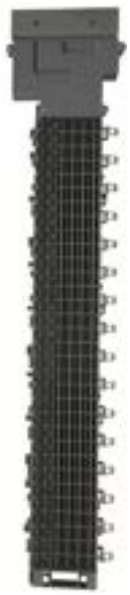
Right Version

Solutions available	Direct feed length incl. Socket end piece mm	Type name	Order code	EAN number 761227	Pack unit	Weight 1 piece kg
32PLE 3L left	742	ZLSP960-3L-32-L	2CCG000155R0001	1507022	1	2,868
32PLE 3LN left	742	ZLSP960-3LN-32-L	2CCG000156R0001	1507039	1	4,258
32PLE 3L right	742	ZLSP960-3L-32-R	2CCG000157R0001	1507046	1	3,258
32PLE 3LN right	742	ZLSP960-3LN-32-R	2CCG000158R0001	1507053	1	4,258
40PLE 3L left	886	ZLSP960-3L-40-L	2CCG000159R0001	1507060	1	3,308
40PLE 3LN left	886	ZLSP960-3LN-40-L	2CCG000160R0001	1507077	1	4,796
40PLE 3L right	886	ZLSP960-3L-40-R	2CCG000161R0001	1507084	1	3,308
40PLE 3LN right	886	ZLSP960-3LN-40-R	2CCG000162R0001	1507091	1	4,796
48PLE 3L left	1030	ZLSP960-3L-48-L	2CCG000163R0001	1507107	1	3,747
48PLE 3LN left	1030	ZLSP960-3LN-48-L	2CCG000164R0001	1507114	1	5,333
48PLE 3L right	1030	ZLSP960-3L-48-R	2CCG000165R0001	1507121	1	3,747
48PLE 3LN right	1030	ZLSP960-3LN-48-R	2CCG000166R0001	1507138	1	5,333
56PLE 3L left	1174	ZLSP960-3L-56-L	2CCG000167R0001	1507145	1	4,187
56PLE 3LN left	1174	ZLSP960-3LN-56-L	2CCG000168R0001	1507152	1	5,871
56PLE 3L right	1174	ZLSP960-3L-56-R	2CCG000169R0001	1507169	1	4,187
56PLE 3LN right	1174	ZLSP960-3LN-56-R	2CCG000170R0001	1507176	1	5,871
64PLE 3L left	1318	ZLSP960-3L-64-L	2CCG000171R0001	1507183	1	4,627
64PLE 3LN left	1318	ZLSP960-3LN-64-L	2CCG000172R0001	1507190	1	6,408
64PLE 3L right	1318	ZLSP960-3L-64-R	2CCG000173R0001	1507206	1	4,627
64PLE 3LN right	1318	ZLSP960-3LN-64-R	2CCG000174R0001	1507213	1	6,408
66PLE 3L left	1354	ZLSP960-3L-66-L	2CCG000175R0001	1507220	1	4,746
66PLE 3LN left	1354	ZLSP960-3LN-66-L	2CCG000176R0001	1507237	1	6,551
66PLE 3L right	1354	ZLSP960-3L-66-R	2CCG000177R0001	1507244	1	4,746
68PLE 3LN right	1390	ZLSP960-3LN-66-R	2CCG000178R0001	1507251	1	6,551
68PLE 3L left	1390	ZLSP960-3L-68-L	2CCG000179R0001	1507268	1	4,853
68PLE 3LN left	1390	ZLSP960-3LN-68-L	2CCG000180R0001	1507275	1	6,683
68PLE 3L right	1390	ZLSP960-3L-68-R	2CCG000181R0001	1507282	1	4,853
70PLE 3LN right	1426	ZLSP960-3LN-68-R	2CCG000182R0001	1507299	1	6,683
70PLE 3L left	1426	ZLSP960-3L-70-L	2CCG000183R0001	1507305	1	4,96
70PLE 3LN left	1426	ZLSP960-3LN-70-L	2CCG000184R0001	1507312	1	6,814
70PLE 3L right	1426	ZLSP960-3L-70-R	2CCG000185R0001	1507329	1	4,96
72PLE 3LN right	1462	ZLSP960-3LN-70-R	2CCG000186R0001	1507336	1	6,814
72PLE 3L left	1462	ZLSP960-3L-72-L	2CCG000187R0001	1507343	1	5,067
72PLE 3LN left	1462	ZLSP960-3LN-72-L	2CCG000188R0001	1507350	1	6,946
72PLE 3L right	1462	ZLSP960-3L-72-R	2CCG000189R0001	1507367	1	5,067
72PLE 3LN right	1498	ZLSP960-3LN-72-R	2CCG000190R0001	1507374	1	6,946
74PLE 3L left	1498	ZLSP960-3L-74-L	2CCG000191R0001	1507381	1	5,185
74PLE 3LN left	1498	ZLSP960-3LN-74-L	2CCG000192R0001	1507398	1	7,089
74PLE 3L right	1498	ZLSP960-3L-74-R	2CCG000193R0001	1507404	1	5,185
74PLE 3LN right	1534	ZLSP960-3LN-74-R	2CCG000194R0001	1507411	1	7,089
76PLE 3L left	1534	ZLSP960-3L-76-L	2CCG000195R0001	1507428	1	5,293
76PLE 3LN left	1534	ZLSP960-3LN-76-L	2CCG000196R0001	1507435	1	7,22
76PLE 3L right	1534	ZLSP960-3L-76-R	2CCG000197R0001	1507442	1	5,293
76PLE 3LN right	1534	ZLSP960-3LN-76-R	2CCG000198R0001	1507459	1	7,22
78PLE 3L left	1570	ZLSP960-3L-78-L	2CCG000644R0001	1507466	1	5,4
78PLE 3LN left	1570	ZLSP960-3LN-78-L	2CCG000200R0001	1507473	1	7,352
78PLE 3L right	1570	ZLSP960-3L-78-R	2CCG000645R0001	1507480	1	5,4
78PLE 3LN right	1570	ZLSP960-3LN-78-R	2CCG000202R0001	1507497	1	7,352
80PLE 3L left	1606	ZLSP960-3L-80-L	2CCG000203R0001	1507503	1	5,507
80PLE 3LN left	1606	ZLSP960-3LN-80-L	2CCG000204R0001	1507510	1	7,483
80PLE 3L right	1606	ZLSP960-3L-80-R	2CCG000205R0001	1507527	1	5,507
80PLE 3LN right	1606	ZLSP960-3LN-80-R	2CCG000206R0001	1507534	1	7,483

Busbar system 250 A

Direct feed Accessories

At the first 12 module positions close to the XT4 a derating of 0,76 shall be applied.
For the other modules the derating is according the data from the technical catalogue for MCB, RCD, RCBOs. The specific deratings for devices for influence of adjacent poles and ambient temperature must be still carefully attended in any case.

Ordering data

Solutions available	EAN number 761227	Type name	Order code	Weight 1 piece kg	Pack unit
Heatsink 3L	1512446	ZLSP960HS-3L	2CCG000736R0001	197	1
Heatsink 3LN	1512453	ZLSP960HS-3LN	2CCG000739R0001	262	1
Screws (only for replacement, all screws are included in direct feed)	1508401	ZLSP960screw	2CCG000361R0001	55	-

SMISSLINE TP plug-in system

Busbar system 250A

Pan Assembly solution

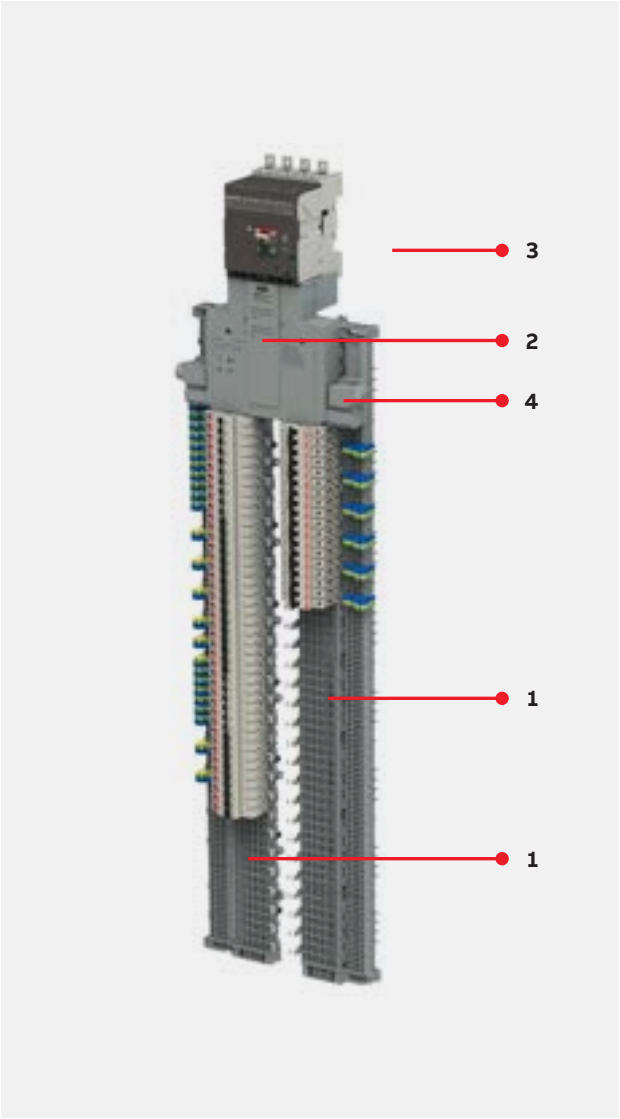

The Pan Assembly design provides a solution for directly connecting two 250A SMISSLINE TP Power Bar Systems to a pluggable Tmax XT4 MCCB, thereby reducing labour time. The two 250A SMISSLINE TP Power Bar Systems are installed vertically for optimum use of space. The Tmax XT4 MCCB can be fitted above or below the Smissline arrangement, depending on whether the incoming cables are fed from the top or the bottom of the enclosure.
The complete system is IP20 touch proof and is tested according to IEC/EN 61439-6.

Step 1
Select the required Power Bar System 250A starter pack. There is a wide selection of starter packs available, ranging from 30 up to 110 modules (ZLSP950….) in 3L and 3LN variations. The starter packs come with the busbars already fitted. You can also build up your 250A Smissline system individually, using the 6 and 8 module main sockets (ZLSP908/906) and the different lengths of available 250A busbar.
Additional sockets can be selected as well, if external N and/or PE busbars are needed.

Step 2
Select the Tmax XT4 MCCB to Smissline system incoming connection kit (ZLSP940…), depending on top or bottom feed.

Step 3
Select the Plug-in Tmax XT4 Moulded Case Circuit Breaker. A 3pole (1SDA068196R1) or 4pole (1SDA068198R1) plug-in base is also required.

Step 4
Application with additional socket (ZLSP940-3LN-N top 2CCG001562R0001) you need to order parts as well for the incoming additional socket:1piece ZLSP935-8NPE 2CCG000042R0001 and 1piece ZLSP935-8NPE-R 2CCG000046R0001

The height difference between XT4 and SMISSLINE is 60mm. This means SMISSLINE must be mounted 60mm higher.

Order data

Pan Assembly use cases

3L Pan Assembly XT4 no additional socket, top feeding

	Solutions available	EAN number 761227	Type name	Order code	Weight 1 piece kg	Pack unit
	Plug-in Tmax XT4 Moulded Case+ plug-in base 3pole (1SDA068196R1) +Bar System 250A starter pack	1519636	ZLSP940-3L top	2CCG001479R0001	1.553	1

3L Pan Assembly XT4 no additional socket, bottom feeding

	Solutions available	EAN number 761227	Type name	Order code	Weight 1 piece kg	Pack unit
	Plug-in Tmax XT4 Moulded Case+ plug-in base 3pole (1SDA068196R1) +Bar System 250A starter pack	1506230	ZLSP940-3L bottom	2CCG001482R0001	1.553	1

Order data

Pan Assembly use cases

3L Pan Assembly no N on main socket additional socket only PE, top feeding

Solutions available	EAN number 761227	Type name	Order code	Weight 1 piece kg	Pack unit
Plug-in Tmax XT4 Moulded Case+ plug-in base 3pole (1SDA068196R1) +Bar System 250A starter pack	1519636	ZLSP940-3L top	2CCG001479R0001	1.553	1
	1506193	ZLSP935-8PE	2CCG000043R0001	0.178	1
	1506230	ZLSP935-8P-R	2CCG000047R0001	0.178	1

3L Pan Assembly no N on main socket additional socket only PE, bottom feeding

Solutions available	EAN number 761227	Type name	Order code	Weight 1 piece kg	Pack unit
Plug-in Tmax XT4 Moulded Case+ plug-in base 3pole (1SDA068196R1)	1519636	ZLSP935-8PE-R	2CCG000047R0001	1.553	1
	1506193	ZLSP935-PE	2CCG000043R0001	0.178	1
	1506230	ZLSP940-3L bottom	2CCG001482R0001	0.178	1

Order data

Pan Assembly use cases

3LN Pan Assembly XT4 incl. N no additional socket, top feeding

	Solutions available	EAN number 761227	Type name	Order code	Weight 1 piece kg	Pack unit
	Plug-in Tmax XT4 Moulded Case+ plug-in base 4pole (1SDA068198R1) +Bar System 250A starter pack	1519612	ZLSP940-3LN top	2CCG001480R0001	1.659	1

3LN Pan Assembly XT4 incl. N no additional socket, bottom fitting

	Solutions available	EAN number 761227	Type name	Order code	Weight 1 piece kg	Pack unit
	Plug-in Tmax XT4 Moulded Case+ plug-in base 4pole (1SDA068198R1)	1519643	ZLSP935-3LN bottom	2CCG001483R0001	1.659	1

Order data

Pan Assembly use cases

3LN Pan Assembly XT4 no N no additional socket, top fitting

	Solutions available	EAN number 761227	Type name	Order code	Weight 1 piece kg	Pack unit
	Plug-in Tmax XT4 Moulded Case+ plug-in base 3pole (1SDA068196R1) +Bar System 250A starter pack	1519629	ZLSP940-3LN1 top	2CCG001481R0001	1.35	1

3LN Pan Assembly XT4 no N no additional socket, bottom fitting

	Solutions available	EAN number 761227	Type name	Order code	Weight 1 piece kg	Pack unit
	Plug-in Tmax XT4 Moulded Case+ plug-in base 3pole (1SDA068196R1)	519650	ZLSP940-3LN1 botton	2CCG001484R0001	1.659	1

Order data

Pan Assembly use cases

3LN Pan Assembly XT4 with N, Connection N main to additional socket additional socket only N or N and PE

	Solutions available	EAN number 761227	Type name	Order code	Weight 1 piece kg	Pack unit
	Plug-in Tmax XT4 Moulded Case+ plug-in base 4pole (1SDA068198R1) +Bar System 250A starter pack	1520403	ZLSP940-3LN-N top	2CCG001562R0001	1.659	1
		1506186	ZLSP935-8NPE	2CCG000042R0001	0.24	1
		1506223	ZLSP935-8NPE-R	2CCG000046R0001	0.24	1

Technical data data IEC/EN 61439-6 and UL508

Pan Assembly 250A

Pan Assembly 250A

Number of poles	30 to 110 3p+N / 2 additional bars PE+N
Rated operational voltage (U_e)	240/415 VAC
Rated insulation voltage (U_i)	690 VAC
IP Code	IP20B IP
Pollution degree	3 (415 VAC)
Rated impulse voltage (U_{imp})	8 kV Main busbars; 6 kV Auxiliary busbars
Rated current of the assembly (I_{nA})	250 A
Rated current of a circuit (I_{nc}): main circuit	Main circuit: max 250 A, Auxiliary circuit: max 40 A
Rated short-time withstand current (I_{cw})	Main circuit: 15 kA / 100 ms, Auxiliary circuit: 4 kA / 50 ms
Rated peak withstand current (I_{pk})	Main circuit: 30 kA, Auxiliary circuit: 6 kA
Rated frequency (f)	50/60 Hz
Rated conditional short-circuit current (I_{cc})	see table below
Ambient air temperature	60°C
Size of CU bars 3P+N+PE	3 x25 mm (75 mm2)
Size of CU auxiliary bars La Lb	2 x 5 mm (10 mm2)
Environmental conditions (damp heat)	2 cycles with 55 °C/90–96 % and 25 °C/95–100 % acc. to IEC/EN 60068-2-30
Tightening torque	8 Nm, Cover 1,2 Nm
Ambient temperature	–25 … +60 °C
Storage temperature	–40 … +70 °C

IEC	Rated conditional short-circuit current (I_{cc})	Voltage (VAC)	Rated conditional short-circuit current (I_{cc})	Incoming current of main busbars (L1, L2, L3, N)	Short circuit protection device (SCPD)
		415V	50kA	250A	ABB Tmax XT4 250 A

Technical data data UL508; Approvals for US and CA: cULus Direct Feed 250A

SMISSLINE TP system for UL 508 – Industrial Control Equipment, CSA C22.2 No. 14 – Industrial Control Equipment UL File E222110	Control Equipment UL File E222110
UL Rated Voltage	600VAC
UL Rated Current (End Feed)	250A
UL Short Circuit Rating	50kA (480V), 35kA (600V) with XT4 250A

Order data
Pan Assembly 250A

	Incoming Solution with XT4 3LN plug-in for Tmax XT4 4pole (1SDA068198R1)	Number 761 227 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
	Incoming terminal block Pan Assembly top feed 3LN, XT4 include the N	1519612	ZLSP940-3LN top	2CCG001480R0001	1659	1
	Incoming terminal block Pan Assembly bottom feed 3LN, XT4 include the N	1519643	ZLSP940-3LN bottom	2CCG001483R0001	1659	1
	Incoming terminal block Pan Assembly top feed 3LN, XT4 include the N-N (connection main to additional socket)	1520403	ZLSP940-3LN-N top	2CCG001562R0001	1659	1
	Incoming for additional socket	1506186 1506223	ZLSP935-8NPE ZLSP935-8NPE-R	2CCG000042R0001 2CCG000046R0001	240 240	1

Order data

Pan Assembly 250A

Pan Assembly 250A (Incoming need 8 modules space on the busbar system)

	Incoming Solution with XT4 3L plug-in for Tmax XT4 3pole (1SDA068196R1)	Number 761 227 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
	Incoming terminal block Pan Assembly top feed 3LN, XT4 include the N-N (connection main to additional socket)	1519605	ZLSP940-3L top	2CCG001479R0001	1553	1
	Incoming terminal block Pan Assembly bottom feed 3L	1519636	ZLSP940-3L bottom	2CCG001482R0001	1659	1
	Incoming terminal block Pan Assembly top feed 3LN, XT4 without N	1519629	ZLSP940-3LN1 top	2CCG001481R0001	1350	1
	Incoming terminal block Pan Assembly bottom feed 3LN, XT4 without N	519650	ZLSP940-3LN1 bottom	2CCG001484R0001	1659	1

	Spare part Incoming terminal block Pan Assembly (only for replacement)	Number 761 227 EAN	Order details		Weight 1 piece kg	Pack unit pc.
			Type code	Order code		
	Main Cover SMISSLINE Incoming Pan Assembly Spare part	1519667	ZLSP940-main cover	2CCG001485R0001	223	1
	Socket base	1519674	ZLSP940-socket base	2CCG001486R0001	746	1
	Connection N main socket to N additional socket	1520410	ZLSP940N-N	2CCG001564R0001	223	1
	Slider closed	1519681	ZLSP940-slider closed	2CCG001487R0001	82	1
	Slider N	1519698	ZLSP940-slider N	2CCG001488R0001	82	1
	Ring lug base N	1519704	ZLSP940-ringlug base N	2CCG001489R0001	335	1
	Connector cover	1519711	ZLSP940-connector	2CCG001490R0001	93	1

SMISSLINE TP plug-in system

One system with many options

SMISSLINE TP protective devices with plug-in technology – the individual way in switchgear technology
Five modern protective devices in the same design are simply plugged onto a busbar system. The complex feed-in and connection work is already done. In addition to this time and cost savings, it is crucial to be able to quickly and easily replace equipment. Third-party devices can be integrated into the busbar system by using adapters. The system was developed for commercial and industrial switchgear technology. Installation and wiring times can be greatly reduced by using the directly attachable system.

Together with the ABB STRIEBEL & JOHN switchgear system, optimum space utilization, easy changes and expansion of the switch cabinet and its installations can be achieved thanks to horizontal or vertical installation options. The individual components are coordinated with each other, such as the length of the plug-in socket and the modular components of the switch cabinets. Of course, mixed installation options of conventional modular devices can also easily be realized, such as pro M Compact. The configured ABB STRIEBEL & JOHN expansion products make this possible.

A powerful 250 A system is now available with the SMISSLINE TP Power Bar system. The busbars have a rated amperage of 250 A and therefore allow end feed of 250 A, which significantly expands the system’s range of application.

SMISSLINE TP and ABB STRIEBEL & JOHN – the cabinet system at a glance:
- Flexible and modular
- Freedom in concept and arrangement
- Time saved during planning and execution
- Quick adaptation when expanding
- Allows for the load-free connection and disconnection of devices and components under voltage without the need for additional personal protective equipment to guard against electrical hazards
- Coordinated product components
- SMISSLINE TP modules can be combined with other ABB STRIEIBEL & JOHN distribution panels and modules

Small cause, large effect
As the world's first pluggable socket system, SMISSLINE TP allows devices and components to be snapped on and off, load-free and under voltage, without having to take additional personal protective measures. It opens up to a completely new prospects when it comes to installation, operation and flexibility.

SMISSLINE TP plug-in system

One system with many options

—
01
The outlet wiring is done directly on the installed devices. The N and PE terminals are assigned to the devices accordingly. The outlet cables are affixed in a mesh cable tray neatly and clearly arranged.

—
02
A cabinet equipped with modules for accommodating SMISSLINE TP devices with third-party device adapters and pro M modular devices.

—
01

—
02

SMISSLINE TP plug-in system

CombiLine modules view

Horizontal modules are suitable for mounting on WR or EDF profiles. From cabinet depth of 215 mm. The WR or EDF mounting frame must be ordered separately.

Vertical modules are suitable for mounting in cabinets from a depth of 275 mm. The mounting frame must be ordered separately. Cable laying grid is included for cable fixing. With DIN rail for PE/N disconnect terminals.

Sectional drawing from above, example MC203HS

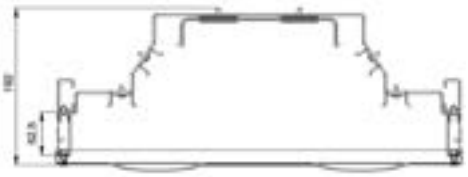

Sectional drawing from above, example MC203VS

Front view

Front view

SMISSLINE TP 125 A interior expansion with CombiLine

Options for assembly in an enclosure

For a horizontal device arrangement, the DIN rail can be set in conjunction with mounting adapters. The Busbar systems cannot be through-connected from one panel to the next. The DIN rail is mounted to a 2-stage bracket (in front upon delivery). The front position is for the plug-in socket assembly. The SMISSLINE TP devices will directly be mounted. The back position is for mounting the socket bases for devices with DIN-rail adapters.

For a vertical device arrangement, the existing cover holders are replaced with cover holders ED137P4 with spacers ED135P4 in conjunction with mounting adapters. In addition, a cover raising frame is required, so that there is more space under the cover. All devices using mounting adapters are to be arranged under a separate cover. Cable lying grids are installed for modules with a vertical device arrangement in order to attach the lines. The DIN rails are designed to be equipped with the SMISSLINE TP socket base rows. It is also possible to connect the SMISSLINE TP additional socket (N/PE terminals).

Horizontal device arrangement

Vertical device arrangement

Important: It is recommended to provide at least a 150 mm high terminal or wiring space on the cable entry side.

SMISSLINE TP 125 A interior expansion with CombiLine

For horizontal and vertical device arrangement

MC203HS

MC303HS

- SMISSLINE TP modules for horizontal device arrangement
- Extension with DIN rails 35 x 15 mm
- Distance between DIN rails 150 mm
- From 3 panels on the DIN rails are equipped, with additional stabilization rail
- Important: The SMISSLINE TP busbar system cannot be through-connected from one module to the next
- The mounting frame must be ordered separately

Height		Width		Socket base length			From cabinet depth	FLATPACK not installed		MOUNTED and installed in the cabinet	
OH	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	2	500	2 x 22	●	●	215	MBC202HS	2CPX042155R9999	MC202HS	2CPX042132R9999
	300	3	750	2 x 36	●	●	215	MBC302HS	2CPX042156R9999	MC302HS	2CPX042133R9999
3	450	2	500	3 x 22	●	●	215	MBC203HS	2CPX042157R9999	MC203HS	2CPX042134R9999
	450	3	750	3 x 36	●	●	215	MBC303HS	2CPX042158R9999	MC303HS	2CPX042135R9999
4	600	2	500	4 x 22	●	●	215	MBC204HS	2CPX042159R9999	MC204HS	2CPX042136R9999
	600	3	750	4 x 36	●	●	215	MBC304HS	2CPX042160R9999	MC304HS	2CPX042137R9999
5	750	2	500	5 x 22	●	●	215	MBC205HS	2CPX042161R9999	MC205HS	2CPX042138R9999
	750	3	750	5 x 36	●	●	215	MBC305HS	2CPX042162R9999	MC305HS	2CPX042139R9999

MC103VS

MC203VS

MC305VS

- SMISSLINE TP modules for vertical device arrangement
- Extension with DIN rails 35 x 15 mm
- The DIN rails in the back are designed for standard N (N disconnect terminals) and PE terminals
- A cable laying grid is included for cable fixing
- The DIN rails and cable laying grids are flush with the module
- Important: Vertical modules cannot be mounted directly on central support rails and horizontal cross members
- The mounting frame must be ordered separately

3	450	1	250	1 x 22		●	275	MBC103VS	2CPX042163R9999	MC103VS	2CPX042140R9999
	450	2	500	2 x 22		●	275	MBC203VS	2CPX042164R9999	MC203VS	2CPX042141R9999
4	600	1	250	1 x 30		●	275	MBC104VS	2CPX042165R9999	MC104VS	2CPX042142R9999
	600	2	500	2 x 30		●	275	MBC204VS	2CPX042166R9999	MC204VS	2CPX042143R9999
	600	3	750	2 x 30		●	275	-	-	MC304VS	2CPX042913R9999
5	750	1	250	1 x 38		●	275	MBC105VS	2CPX042167R9999	MC105VS	2CPX042144R9999
	750	2	500	2 x 38		●	275	MBC205VS	2CPX042168R9999	MC205VS	2CPX042145R9999
	750	3	750	2 x 38		●	275	MBC305VS	2CPX042911R9999	MC305VS	2CPX042910R9999

*1 Expansion on EDF mounting frame *2 Expansion on WR mounting frame

SMISSLINE TP Power Bar 250 A interior expansion with CombiLine

For horizontal and vertical device arrangement

MC203HS

MC303HS

- SMISSLINE TP modules for horizontal device arrangement
- Extension with DIN rails 35 x 15 mm
- Distance between DIN rails 150 mm
- From 3 panels on the DIN rails are equipped, with additional stabilization rail
- Important: The SMISSLINE TP busbar system cannot be through-connected from one module to the next
- The mounting frame must be ordered separately

Height		Width		Socket base length			Down Cabinet depth	FLATPACK not installed		MOUNTED and installed in the cabinet	
OH	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Item number	Type	Item number
2	300	2	500	2 x 22	●	●	215	MBC202HS	2CPX042155R9999	MC202HS	2CPX042132R9999
	300	3	750	2 x 36	●	●	215	MBC302HS	2CPX042156R9999	MC302HS	2CPX042133R9999
3	450	2	500	3 x 22	●	●	215	MBC203HS	2CPX042157R9999	MC203HS	2CPX042134R9999
	450	3	750	3 x 36	●	●	215	MBC303HS	2CPX042158R9999	MC303HS	2CPX042135R9999
4	600	2	500	4 x 22	●	●	215	MBC204HS	2CPX042159R9999	MC204HS	2CPX042136R9999
	600	3	750	4 x 36	●	●	215	MBC304HS	2CPX042160R9999	MC304HS	2CPX042137R9999
5	750	2	500	5 x 22	●	●	215	MBC205HS	2CPX042161R9999	MC205HS	2CPX042138R9999
	750	3	750	5 x 36	●	●	215	MBC305HS	2CPX042162R9999	MC305HS	2CPX042139R9999

MC203VS

MC305VS

- SMISSLINE TP Power Bar 250 A modules for vertical device arrangement
- Extension with DIN rails 35 x 15 mm
- The DIN rails in the back are designed for standard N (N disconnect terminals) and PE terminals
- A cable laying grid is included for cable fixing
- The DIN rails and cable laying grids are flush with the module
- Important: Vertical modules cannot be mounted directly on central support rails and horizontal cross members.
- The mounting frame must be ordered separately

3	450	2	500	2 x 22		●	275	MBC203VP	2CPX043369R9999	MC203VP	2CPX043349R9999
4	600	2	500	2 x 30		●	275	MBC204VP	2CPX043371R9999	MC204VP	2CPX043351R9999
	600	3	750	2 x 30		●	275	MBC304VP	2CPX043376R9999	MC304VP	2CPX043374R9999
5	750	2	500	2 x 38		●	275	MBC205VP	2CPX043373R9999	MC205VP	2CPX043353R9999
	750	3	750	2 x 38		●	275	MBC305VP	2CPX043377R9999	MC305VP	2CPX043375R9999

*1 Expansion on EDFmounting frame *2 Expansion on WRmounting frame

SMISSLINE TP plug-in system

Cable laying grids, DIN rails, fixing brackets

ZW430



ZW436

ZW470

ZW257

ZW359

ED73

ED52

ZX399

ZW590

ZW592

Article	Use for...	VE/pc.	Type	Order code
Cable laying grids width 100 mm **Length**				
450 mm	M(B)C103VS	1	ZW430	2CPX042170R9999
600 mm	M(B)C104VS	1	ZW431	2CPX042171R9999
750 mm	M(B)C105VS	1	ZW432	2CPX042172R9999
Cable laying grids width 200 mm **Length**				
450 mm	M(B)C203VS	1	ZW436	2CPX042176R9999
600 mm	M(B)C204VS	1	ZW437	2CPX042177R9999
750 mm	M(B)C205VS	1	ZW438	2CPX042178R9999
3000 mm	-	1	ZW460	2CPX073256R9999
Cable laying grids width 300 mm **Length**				
3000 mm	-	1	ZW470	2CPX073257R9999
Fixing bracket for cable laying grids **SMISSLINE TP system 125 A** For cabinet depth from 275 mm				
1 panel wide	M(B)C1...VS	1	ZW257	2CPX042182R9999
2 panel wide	M(B)C2...VS	1	ZW258	2CPX042183R9999
3 panel wide	M(B)C3...VS	1	ZW359	2CPX042912R9999
Vertical DIN rails For module height				
450 mm	M(B)C...03VS	1	ED73	2CPX042184R9999
600 mm	M(B)C...04VS	1	ED74	2CPX042185R9999
750 mm	M(B)C...05VS	1	ED75	2CPX042186R9999
Horizontal DIN rails				
2 panel wide	M(B)C2...HS	1	ED52	2CPX039252R9999
3 panel wide	M(B)C3...HS	1	ED53	2CPX039253R9999
Fixing bracket For horizontal DIN rails, 1 set left / right	M(B)C...HS	1	ZX399	2CPX062669R9999
Mounting bracket for cable laying grids **Power Bar 250 A** For cabinet depth from 275 mm				
1 panel wide	M(B)C1...VP	1	ZW590	2CPX042922R9999
2 panel wide	M(B)C2...VP	1	ZW591	2CPX042923R9999
3 panel wide	M(B)C3...VP	1	ZW592	2CPX042924R9999

SMISSLINE TP plug-in system

Cover holders, panel connectors, raising frames

ED137P4

ED138P12

ED135P4

ED50P12

ED30P2

ED213

Article	VE/pc.	Type	Order code
Cover holder 45 mm high, required when changing the cover height when installing mounting adapters in the cover height when installing vertical modules	4	ED137P4	2CPX062600R9999
Cover holder 52.5 mm high	12	ED138P12	2CPX062602R9999
	40	ED138P40	2CPX062603R9999
Space To extend the cover holder by 25 mm	4	ED135P4	2CPX062610R9999
90 degree press and turn closure	12	ED50P12	2CPX062337R9999
Panel connector Used to join distribution panels or combination sets with each other up to a maximum Overall height 5 (9 RE)	2	ED30P2	2CPX062302R9999
Raising frame for covers Required to change the cover height when installing mounting device adapters in vertical modules External dimensions (H x W)			
450 x 250 mm	1	ED213	2CPX062783R9999
600 x 250 mm	1	ED214	2CPX062784R9999
750 x 250 mm	1	ED215	2CPX062785R9999
450 x 500 mm	1	ED223	2CPX062788R9999
600 x 500 mm	1	ED224	2CPX062789R9999
750 x 500 mm	1	ED225	2CPX062790R9999
450 x 750 mm	1	ED233	2CPX062793R9999
600 x 750 mm	1	ED234	2CPX062794R9999
750 x 750 mm	1	ED235	2CPX062795R9999

SMISSLINE TP plug-in system

Plastic cover horizontal

AS22H

Article	Use for...	VE/pc.	Type	Order code
Plastic cover horizontal With device slot, 2 panel wide External dimensions (H x W)				
300 x 500 mm	M(B)C202HS	1	AS22H	2CPX062764R9999
450 x 500 mm	M(B)C203HS	1	AS23H	2CPX062765R9999
600 x 500 mm	M(B)C204HS	1	AS24H	2CPX062766R9999
750 x 500 mm	M(B)C205HS	1	AS25H	2CPX062767R9999

AS32H

Article	Use for...	VE/pc.	Type	Order code
Plastic cover horizontal With device slot, 3 panel wide External dimensions (H x W)				
300 x 750 mm	M(B)C302HS	1	AS32H	2CPX062768R9999
450 x 750 mm	M(B)C303HS	1	AS33H	2CPX062769R9999
600 x 750 mm	M(B)C304HS	1	AS34H	2CPX062770R9999
750 x 750 mm	M(B)C305HS	1	AS35H	2CPX062771R9999

SMISSLINE TP plug-in system

Plastic cover vertical

AS13V

AS23V

AS35V

Article	Use for...	VE/pc.	Type	Order code
Plastic cover vertical With device slot, 1 panel wide External dimensions (H x W)				
450 x 250 mm	M(B)C103VS	1	AS13V	2CPX062772R9999
600 x 250 mm	M(B)C104VS	1	AS14V	2CPX062773R9999
750 x 250 mm	M(B)C105VS	1	AS15V	2CPX062774R9999
Plastic cover vertical With device slot, 2 panel wide External dimensions (H x W)				
450 x 500 mm	M(B)C203VS	1	AS23V	2CPX062775R9999
600 x 500 mm	M(B)C204VS	1	AS24V	2CPX062776R9999
750 x 500 mm	M(B)C205VS	1	AS25V	2CPX062777R9999
Plastic cover vertical With device slot, 3 panel wide External dimensions (H x W)				
750 x 750 mm	M(B)C305VS	1	AS35V	2CPX062796R9999

SMISSLINE TP plug-in system

Comparison of starting package with plug-in socket in individual parts

Solution of plug-in socket starting package

The plug-in socket and busbars are already assembled. Different lengths are available. The assignment of the appropriate ABB STRIEBEL & JOHN modules to the starting packages is described on the following pages – planning aid for SMISSLINE TP plug-in socket.

The detailed solutions of the plug-in socket and starting package are evident in the technical catalog SMISSLINE TP or the catalog low-voltage material of ABB-Stotz Kontakt and ABB STRIEBEL & JOHN.

Solution of plug-in socket in individual parts

You can assemble plug-in sockets, busbars and socket end pieces on your own from the individual components. Plug-in sockets with 8 units (144 mm) and 6 units (108 mm) can be selected and assembled in any number up to 110 PLE.

The busbars can be ordered in the length of 1979 mm and shortened accordingly. It is also possible to order busbars from ABB already cut to length.

SMISSLINE TP plug-in system

Starter kit or socket base in individual parts

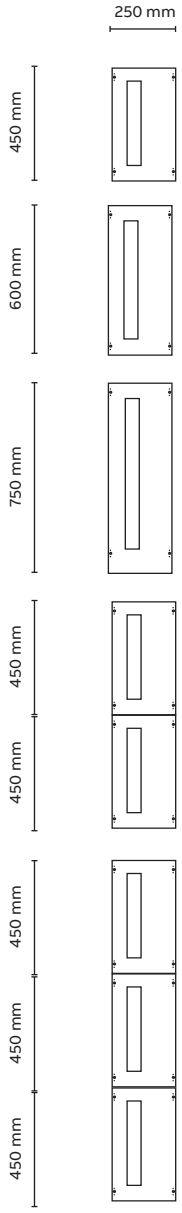

Modules for cabinets from a cabinet depth of 215 mm	Modules for cabinets from a cabinet depth of 275 mm		Grid units	Socket base length
Combination sets type	CombiLine mounted	CombiLine flatpack	GU	SU
1 x ED103VS	1 x MC103VS	1 x MBC103VS	3 RE	22 PLE
1 x ED104VS	1 x MC104VS	1 x MBC104VS	4 RE	30 PLE
1 x ED105VS	1 x MC105VS	1 x MBC105VS	5 RE	38 PLE
2 x ED103VS	2 x MC103VS	2 x MBC103VS	6 RE	46 PLE
3 x ED103VS	3 x MC103VS	3 x MBC103VS	9 RE	72 PLE

Information about planning

Additional starter kit with AB-bus bar on demand.

SMISSLINE TP plug-in system

Assignment of CombiLine modules

Socket base starter kit			Socket base in individual parts			
Unit	**Type**	**Order code**	**Unit**	**Space units**	**Type**	**Order code**
1	ZLS905E22-3L	2CCA183102R0001	2	8	ZLS908	2CCA183030R0001
			1	6	ZLS906	2CCA183035R0001
			1	-	ZLS920 (end piece)	2CCA183017R0001
1	ZLS905E22-3LN*	2CCA183103R0001	3/4*	-	ZLS201E22 (Copper rail)	2CCF800169R0001
1	ZLS905E30-3L	2CCA183110R0001	3	8	ZLS908	2CCA183030R0001
			1	6	ZLS906	2CCA183035R0001
			1	-	ZLS920 (end piece)	2CCA183017R0001
1	ZLS905E30-3LN*	2CCA183111R0001	3/4*	-	ZLS201E38 (Copper rail)	2CCF800173R0001
1	ZLS905E38-3L	2CCA183118R0001	4	8	ZLS908	2CCA183030R0001
			1	6	ZLS906	2CCA183035R0001
			1	-	ZLS920 (end piece)	2CCA183017R0001
1	ZLS905E38-3LN*	2CCA183119R0001	3/4*	-	ZLS201E46 (Copper rail)	2CCF800177R0001
1	ZLS905E46-3L	2CCA183126R0001	5	8	ZLS908	2CCA183030R0001
			1	6	ZLS906	2CCA183035R0001
	ZLS905E46-3LN*	2CCA183127R0001	1	-	ZLS920 (end piece)	2CCA183017R0001
1	ZLS905E72-3L	2CCA183152R0001	9	8	ZLS908	2CCA183030R0001
			1	-	ZLS920 (end piece)	2CCA183017R0001
1	ZLS905E72-3LN*	2CCA183153R0001	3/4*	-	ZLS201E72 (Copper rail)	2CCF800190R0001

* For version with N (4-pole)

Information about planning

When positioning incoming terminal blocks under cover joints, lower feed-in blocks ZLS228 or ZLS229 are to be used.

Vertical modules cannot be mounted directly on central support rails and horizontal cross members.

SMISSLINE TP plug-in system

Starter kit or socket base in individual parts

	Modules for cabinets from a cabinet depth of 215 mm	Modules for cabinets from a cabinet depth of 275 mm		Grid units	Socket base length
	Combination sets type	CombiLine mounted	CombiLine Flatpack	GU	SU
450 mm 	1 x ED203VS	1 x MC203VS	1 x MBC203VS	3 GU	2 x 22 SU
600 mm 	1 x ED204VS	1 x MC204VS 1 x MC304VS	1 x MBC204VS	4 GU	2 x 30 SU
750 mm 	1 x ED205VS	1 x MC205VS 1 x MC305VS	1 x MBC205VS 1 x MBC305VS	5 GU	2 x 38 SU
450 mm 450 mm 	2 x ED203VS	2 x MC203VS	2 x MBC203VS	6 GU	2 x 46 SU
450 mm 450 mm 450 mm 	3 x ED203VS	3 x MC203VS	3 x MBC203VS	9 GU	2 x 72 SU

Information about planning

Additional starter kit with AB-bus bar on demand.

SMISSLINE TP plug-in system

Assignment of CombiLine modules

Socket base starter kit			Socket base in individual parts			
Unit	**Type**	**Order code**	**Unit**	**Space units**	**Type**	**Order code**
2	ZLS905E22-3L	2CCA183102R0001	4	8	ZLS908	2CCA183030R0001
			2	6	ZLS906	2CCA183035R0001
			2	-	ZLS920 (end piece)	2CCA183017R0001
2	ZLS905E22-3LN*	2CCA183103R0001	6/8*	-	ZLS201E22 (copper rail)	2CCF800165R0001
2	ZLS905E30-3L	2CCA183110R0001	6	8	ZLS908	2CCA183030R0001
			2	6	ZLS906	2CCA183035R0001
			2	-	ZLS920 (end piece)	2CCA183017R0001
2	ZLS905E30-3LN*	2CCA183111R0001	6/8*	-	ZLS201E30 (copper rail)	2CCF800169R0001
2	ZLS905E38-3L	2CCA183118R0001	8	8	ZLS908	2CCA183030R0001
			2	6	ZLS906	2CCA183035R0001
			2	-	ZLS920 (end piece)	2CCA183017R0001
2	ZLS905E38-3LN*	2CCA183119R0001	6/8*	-	ZLS201E38 (copper rail)	2CCF800173R0001
2	ZLS905E46-3L	2CCA183126R0001	10	8	ZLS908	2CCA183030R0001
			2	6	ZLS906	2CCA183035R0001
			2	-	ZLS920 (end piece)	2CCA183017R0001
2	ZLS905E46-3LN*	2CCA183127R0001	6/8*	-	ZLS201E46 (copper rail)	2CCF800177R0001
2	ZLS905E72-3L	2CCA183152R0001	18	8	ZLS908	2CCA183030R0001
			2	-	ZLS920 (end piece)	2CCA183017R0001
2	ZLS905E72-3LN*	2CCA183153R0001	6/8*	-	ZLS201E72 (copper rail)	2CCF800190R0001

* For version with N (4-pole)

Information about planning

For modules of 3 panel width the incoming terminal block serves as centre supply.

SMISSLINE TP plug-in system

Starter kit or socket base in individual parts

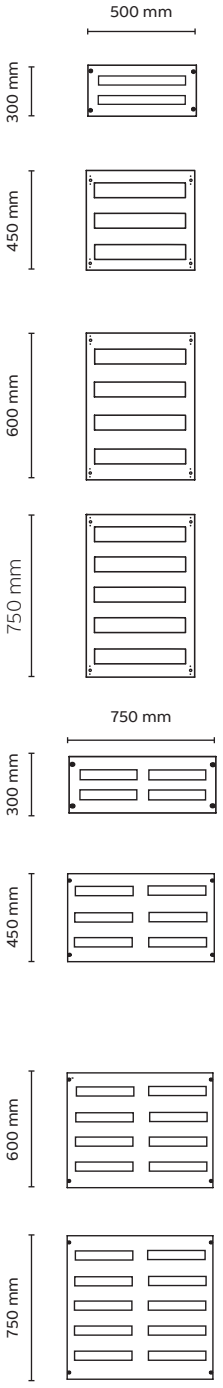

Modules for cabinets from a cabinet depth of 215 mm	Modules for cabinets from a cabinet depth of 215 mm		Grid units	Socket base length
Combination sets type	CombiLine mounted	CombiLine flatpack	GU	SU
–	1 x MC202HS	1 x MBC202HS	2 GU	2 x 22 SU
1 x ED203HS	1 x MC203HS	1 x MBC203HS	3 GU	3 x 22 SU
1 x ED204HS	1 x MC204HS	1 x MBC204HS	4 GU	4 x 22 SU
1 x ED205HS	1 x MC205HS	1 x MBC205HS	5 GU	5 x 22 SU
–	1 x MC302HS	1 x MBC302HS	2 GU	2 x 36 SU
1 x ED303HS	1 x MC3032HS	1 x MBC303HS	3 GU	3 x 36 SU
1 x ED304HS	1 x MC304HS	1 x MBC304HS	4 GU	4 x 36 SU
1 x ED305HS	1 x MC305HS	1 x MBC305HS	5 GU	5 x 36 SU

Information about planning

Additional starter kit with AB-busbar on demand.

SMISSLINE TP plug-in system

Assignment of CombiLine modules

Socket base starter kit			Socket base in individual parts			
Unit	**Type**	**Order code**	**Unit**	**Space units**	**Type**	**Order code**
2	ZLS905E22-3L	2CCA183102R0001	4	8	ZLS908	2CCA183030R0001
			2	6	ZLS906	2CCA183035R0001
			2	-	ZLS920 (end piece)	2CCA183017R0001
2	ZLS905E22-3LN*	2CCA183103R0001	6/8*	-	ZLS201E22 (copper rail)	2CCF800165R0001
3	ZLS905E22-3L	2CCA183102R0001	6	8	ZLS908	2CCA183030R0001
			3	6	ZLS906	2CCA183035R0001
			3	-	ZLS920 (end piece)	2CCA183017R0001
3	ZLS905E22-3LN*	2CCA183103R0001	9/12*	-	ZLS201E22 (copper rail)	2CCF800165R0001
4	ZLS905E22-3L	2CCA183102R0001	8	8	ZLS908	2CCA183030R0001
			4	6	ZLS906	2CCA183035R0001
			4		ZLS920 (end piece)	2CCA183017R0001
4	ZLS905E22-3LN*	2CCA183103R0001	12/16*		ZLS201E22 (copper rail)	2CCF800165R0001
5	ZLS905E22-3L	2CCA183102R0001	10	8	ZLS908	2CCA183030R0001
			5	6	ZLS906	2CCA183035R0001
			5	-	ZLS920 (end piece)	2CCA183017R0001
5	ZLS905E22-3LN*	2CCA183103R0001	15/20*	-	ZLS201E22 (copper rail)	2CCF800165R0001
2	ZLS905E36-3L	2CCA183116R0001	6	8	ZLS908	2CCA183030R0001
			4	6	ZLS906	2CCA183035R0001
			2	-	ZLS920 (end piece)	2CCA183017R0001
2	ZLS905E36-3LN*	2CCA183117R0001	6/8*	-	ZLS201E36 (copper rail)	2CCF800172R0001
3	ZLS905E36-3L	2CCA183116R000	9	8	ZLS908	2CCA183030R0001
			6	6	ZLS906	2CCA183035R0001
			3	-	ZLS920 (end piece)	2CCA183017R0001
3	ZLS905E36-3LN*	2CCA183117R0001	9/12*	-	ZLS201E36 (copper rail)	2CCF800172R0001
4	ZLS905E36-3L	2CCA183116R000	12	8	ZLS908	2CCA183030R0001
			8	6	ZLS906	2CCA183035R0001
			4	-	ZLS920 (end piece)	2CCA183017R0001
4	ZLS905E36-3LN*	2CCA183117R0001	12/16*	-	ZLS201E36 (copper rail)	2CCF800172R0001
5	ZLS905E36-3L	2CCA183116R000	15	8	ZLS908	2CCA183030R0001
			10	6	ZLS906	2CCA183035R0001
			5	-	ZLS920 (end piece)	2CCA183017R0001
5	ZLS905E36-3LN*	2CCA183117R0001	15/20*	-	ZLS201E36 (copper rail)	2CCF800172R0001

* For version with N (4-pole)

Information about planning

When positioning incoming terminal blocks under cover joints, lower feed-in blocks ZLS228 or ZLS229 are to be used.

Vertical modules cannot be mounted directly on central support rails and horizontal cross members.

SMISSLINE TP plug-in system

Starter kit or socket base in individual parts

	Modules for cabinets from a cabinet depth of 215 mm	Modules for cabinets from a cabinet depth of 275 mm		Grid units	Socket base length
	Combination sets type	CombiLine mounted	CombiLine Flatpack	GU	SU
450 mm 	1 x ED203VS	1 x MC203VS	1 x MBC203VS	3 GU	2 x 22 SU
600 mm 	1 x ED204VS	1 x MC204VS 1 x MC304VS	1 x MBC204VS	4 GU	2 x 30 SU
750 mm 	1 x ED205VS	1 x MC205VS 1 x MC305VS	1 x MBC205VS 1 x MBC305VS	5 GU	2 x 38 SU
450 mm 450 mm 	2 x ED203VS	2 x MC203VS	2 x MBC203VS	6 GU	2 x 46 SU
450 mm 450 mm 450 mm 	3 x ED203VS	3 x MC203VS	3 x MBC203VS	9 GU	2 x 72 SU

Information about planning

Additional starter kit with AB-busbar on demand.

SMISSLINE TP plug-in system

Assignment of CombiLine modules

Socket base starter kit			Socket base in individual parts			
Unit	**Type**	**Order code**	**Unit**	**Space units**	**Type**	**Order code**
	-	-	-	-	-	-
			-	-	-	-
			-	-	-	-
	-	-	-	-	-	-
2	ZLSP950E30-3L	2CCF212200A0001	6	8	ZLSP908	2CCF212052A0001
			2	6	ZLSP906	2CCF212053A0001
			2	-	ZLSP920	2CCF212082A0001 socket
2	ZLS905E30-3LN*	2CCF212300A0001	6/8*	-	ZLSP1250E30	2CCF212100M0030
2	ZLSP950E38-3L	2CCF212204A0001	8	8	ZLSP908	2CCF212052A0001
			2	6	ZLSP906	2CCF212053A0001
			2	-	ZLSP920	2CCF212082A0001 socket
2	ZLSP950E38-3LN*	2CCF212304A0001	6/8*	-	ZLSP1250E38	2CCF212100M0038
2	ZLSP950E46-3L	2CCF212208A0001	10	8	ZLSP908	2CCF212052A0001
			2	6	ZLSP906	2CCF212053A0001
			2	-	ZLSP920	2CCF212082A0001 socket
2	ZLSP950E46-3LN*	2CCF212308A0001	6/8*	-	ZLSP1250E46	2CCF212100M0046
2	ZLSP950E72-3L	2CCF212221A0001	18	8	ZLSP908	2CCF212052A0001
			2	-	ZLSP906	2CCF212053A0001
2	ZLSP950E72-3LN*	2CCF212321A0001	6/8*	-	ZLSP920	2CCF212082A0001 socket
				-	ZLSP1250E72	2CCF212100M0072

* For version with N (4-pole)

Information about planning

For modules of 3 panel width the incoming terminal block serves as centre supply.

SMISSLINE TP plug-in system

Starter kit or socket base in individual parts

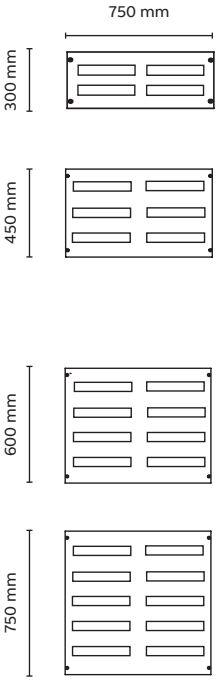

Modules for cabinets from a cabinet depth of 215 mm	Modules for cabinets from a cabinet depth of 215 mm		Grid units	Socket base length
Combination sets type	CombiLine mounted	CombiLine kit	GU	SU
–	1 x MC302HS	1 x MBC302HS	2 GU	2 x 36 SU
1 x ED303HS	1 x MC3032HS	1 x MBC303HS	3 GU	3 x 36 SU
1 x ED304HS	1 x MC304HS	1 x MBC304HS	4 GU	4 x 36 SU
1 x ED305HS	1 x MC305HS	1 x MBC305HS	5 GU	5 x 36 SU

SMISSLINE TP plug-in system

Starter kit or socket base in individual parts

Socket base starter kit			**Socket base in individual parts**			
Unit	**Type**	**Order code**	**Unit**	**Space units**	**Type**	**Order code**
2	ZLSP950E36-3L	2CCF212203A0001	6	8	ZLSP908	2CCF212052A0001
			4	6	ZLSP906	2CCF212053A0001
			2	-	ZLSP920	2CCF212082A0001 socket
2	ZLSP950E36-3LN*	2CCF212303A0001	6/8*	-	ZLSP1250E36	2CCF212100M0036
3	ZLSP950E36-3L	2CCF212203A0001	9	8	ZLSP908	2CCF212052A0001
			6	6	ZLSP906	2CCF212053A0001
			3	-	ZLSP920	2CCF212082A0001 socket
3	ZLS905E36-3LN*	2CCF212303A0001	9/12*	-	ZLSP1250E36	2CCF212100M0036
4	ZLSP950E36-3L	2CCF212203A0001	12	8	ZLSP908	2CCF212052A0001
			8	6	ZLSP906	2CCF212053A0001
			4	-	ZLSP920	2CCF212082A0001 socket
4	ZLSP950E36-3LN*	2CCF212303A0001	12/16*	-	ZLSP1250E36	2CCF212100M0036
5	ZLSP950E36-3L	2CCF212203A0001	15	8	ZLSP908	2CCF212052A0001
			10	6	ZLSP906	2CCF212053A0001
			5	-	ZLSP920	2CCF212082A0001 socket
5	ZLSP950E36-3LN*	2CCF212303A0001	15/20*	-	ZLSP1250E36	2CCF212100M0036

* For version with N (4-pole)

Information about planning

Additional starter kit with AB-busbar on demand.

LIGHT SWITCHES AND SOCKET OUTLETS

Electrical installation solutions for buildings
Light switches and socket outlets

Index

Busch-art linear®	4
carat®	48
Busch-dynasty®	102
pure stainless steel	140
solo®	186
Busch-axcent®	238
future® linear	298
basic55®	364
Alba	402
Sky Niessen	424
Impressivo	482
Zoni®	520
Levit®	552
Swing®L	582
Zenit	596
Chiara	710
Unno	738
Origen	756
IVIE	782
ABB Tvisha	796
Millenium	808
Zenit BS	844
Framia	880
Inora	904
Metal clad	920
Weatherproof	926
BS Thermostat	932
ocean®	934
Movement-detector	950

Light switches and socket outlets
A piece of design in your interior.

Discover the wide range of designs, colours, finishes and functions and find the best solutions with innovative technology. Let modern light switches highlight the individual design of your living space.

VDE-standard

Light switches and socket outlets

A piece of design in your interior.

British standard

IT-standard

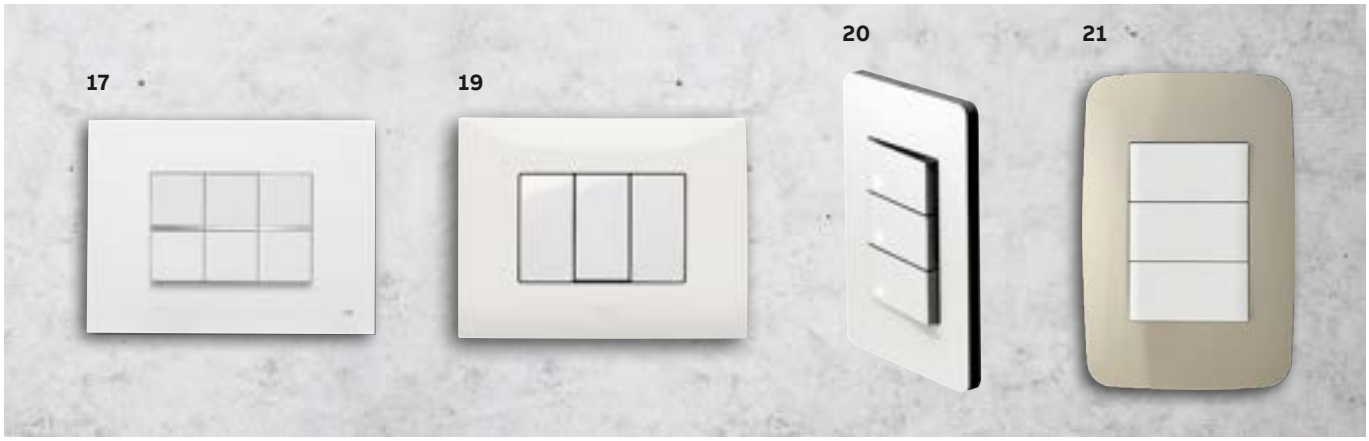

01 **Busch-art linear®**
02 **carat®**
03 **Busch-dynasty®**
04 **pure stainless steel**
05 **solo®**
06 **Busch-axcent®**
07 **Busch-axcent® pur**
08 **future® linear**
09 **basic55® Wavline**
10 **basic55® Baseline**
11 **Alba**
12 **Sky Niessen**
13 **Skymoon**
14 **Impressivo**
15 **Zoni®**
16 **Levit®**
17 **Swing®L**
18 **Zenit**
19 **Chiara**
20 **Unno**
21 **Origen**
21 **IVIE**
22 **ABB Tvisha**
23 **Millenium**
24 **Inora**
25 **Metal clad**
26 **Weatherproof**
27 **BS Thermostat**
28 **ocean®**
29 **Movement-detector**

For design range availability on the local market contact your local sales team.

Busch-art linear®
Thinking about tomorrow.

Busch-art linear® forms the perfect balance between design and nature, between an industrial product and ecological imperatives.
Our new range of wiring accessories includes mechanical and electronic switches that can be integrated into ABB's smart home systems, ABB-free@home® and ABB i-bus® KNX, in a unique and sustainable design.

01 black matt, black matt
02 studio white matt, studio white matt
03 studio white, studio white
04 studio white matt, aluminium silver
05 black matt, aluminium black
06 black matt, glass blue
07 black matt, glass black
08 studio white matt, wood oak
09 black matt, wood walnut
10 black matt, paper black
11 studio white matt, studio , slate terra rosso
12 black matt, glass black / gold
13 studio white matt, studio white matt / copper
14 black matt, black matt / gold
15 black matt, black matt / chrome

Busch-art linear®

Selected functions.

01



02

03

04

05

06

07

08

09

10

11

12

01 Rocker Switch 1gang
02 Busch Universal Rotary Dimmer
03 Busch-Watchdog®
04 Busch-steplight®
05 SCHUKO® socket outlet
06 SCHUKO® USB socket outlet, USB A&C
07 SCHUKO® socket outlet with lid
08 Rocker Switch Blind Control
09 Busch-Trevion® Display
10 Room thermostat
11 Busch-Radio DAB+
12 65 W power adapter insert

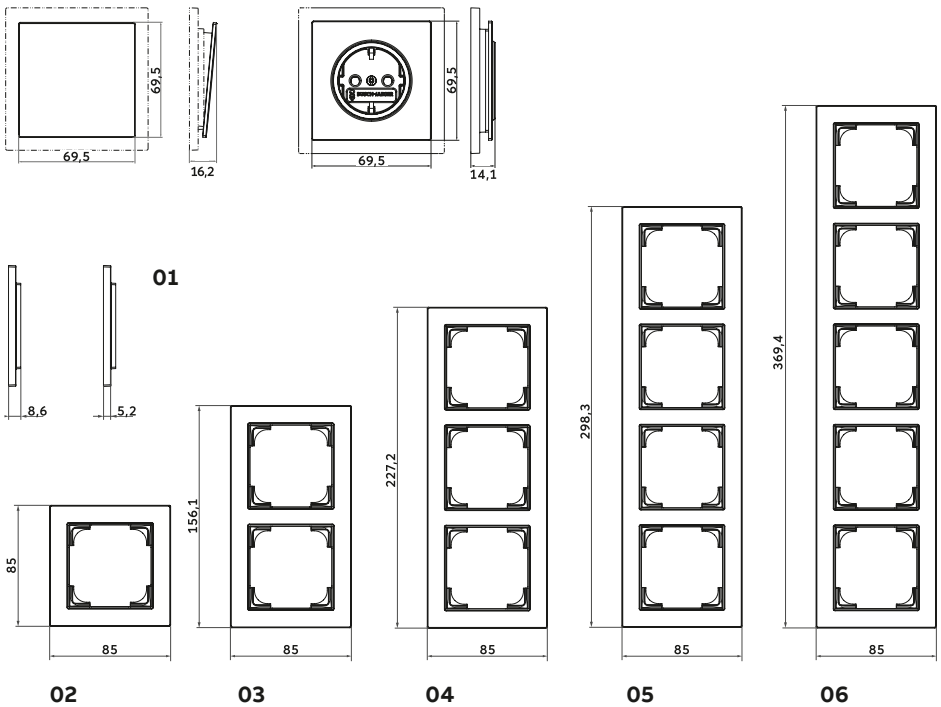

1 to 5gang cover frame for horizontal and vertical installation.

01 Side view, 8,6 mm min. x 69,5 mm
02 85 mm x 85 mm
03 85 mm x 156,1 mm
04 85 mm x 227,2 mm
05 85 mm x 298,3 mm
06 85 mm x 369,4 mm

For more information about light switch ranges visit ABB global web sites.

Busch-art linear®

Rocker switches / push switches

Rocker Switch Mechanism [1]



Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way		
	2000/6 US-500	2CKA001012A2198	10
	2gang 1way		
	2000/5 US-500	2CKA001012A1150	10
	DP, 1gang 2way [2]		
	2000/6/2 US	2CKA001012A0954	10
	1gang		
	2000/7 US-500	2CKA001012A2199	10
	DP, 1gang 1way		
	2000/2 US-500	2CKA001012A2196	10
	SP, 1gang 1way switch		
	2000/1 US-500	2CKA001012A2059	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1]

Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	Switch-off and two-way circuit 16 A [2]		
	2400/6 US-500	2CKA001012A2232	10
	2gang switch 16 A		
	2400/5 US-500	2CKA001012A2234	10
	1gang intermediate 16 A		
	2400/7 US-500	2CKA001012A2236	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]
2gang 2way

With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/6/6US-101-500	2CKA001011A0928	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]
Changeover/changeover circuit 16 A

With screwless terminals.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6/6US-101-500	2CKA001022A0663	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1] [2]
DP, 1gang 1way



For switching high loads.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/2 US-101-500	2CKA001012A2193	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Also for switching SCHUKO® socket outlets.

Rocker Switch Mechanism [1] [2]
3-pole, 1gang 1way switch

Rated voltage: 400 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/3 US	2CKA001011A0816	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1]

With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way [2]		
	2000/6 USGL-500	2CKA001012A2194	10
	2gang 1way		
	2000/5 USGL	2CKA001012A1135	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.

Busch-art linear®

Rocker switches / push switches

Rocker Switch Mechanism, control [1]
2gang switch with N-clamp 16 A

With LED.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/5 USK-500	2CKA001012A2238	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism, control [1] [2] [3]

With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way with N-terminal		
	2000/6 USK-500	2CKA001022A0659	10
	DP, 1gang 1way		
	2000/2 UK	2CKA001022A0656	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Rocker Switch Mechanism, control [1] [2] [3]
Switch-off and two-way circuit with N-clamp 16 A

With neon lamp.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6 USK-500	2CKA001022A0661	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-500	2CKA001413A0574	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With 2 independent signalling contacts.
Rated voltage: 250 V~
Inputs: 1
Outputs: 1
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-201	2CKA001413A0483	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1] [2] [3]
SP, with normally open contact (operating current)

With illumination.
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 USGL-500	2CKA001413A1106	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.
[3] For relay and touch dimmer applications.

Push-switch mechanism [1]

With one input terminal and 2 actuating covers.
Rated voltage: 250 V~
Inputs: 1
Outputs: 2x Normally open contact
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-205-500	2CKA001413A1105	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1]
SP, 1gang 2way



Can be wired for normally open contacts (stand-by current) or normally closed contacts (operating current).
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-206-500	2CKA001413A1104	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-art linear®

Rocker switches / push switches

Rocker for Switch/push button, Single rocker

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1786-44G-500**	2CKA001751A3337	10
studio white, matt [1])	**1786-44M-500**	2CKA001751A3338	10
black matt [1])	**1786-45M-500**	2CKA001751A3340	10

[1]) Surface painted.

Rocker for Switch/push button, Two-part rocker

For flush-mounted switch 2g 1w, 2g push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1785-44G-500**	2CKA001751A3389	10
studio white, matt [1])	**1785-44M-500**	2CKA001751A3390	10
black matt [1])	**1785-45M-500**	2CKA001751A3392	10

[1]) Surface painted.

Rocker for Switch/push button, Two-part rocker

As a cover for flush-mounted control 2gang switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1785 K-44G**	2CKA001751A3305	10
studio white, matt [1])	**1785 K-44M**	2CKA001751A3306	10
black matt [1])	**1785 K-45M**	2CKA001751A3308	10

[1]) Surface painted.

Rocker for Switch/push button, Single rocker

With light outlet transparent.
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1789 N-44G-500**	2CKA001751A3365	10
studio white, matt [1])	**1789 N-44M-500**	2CKA001751A3366	10
black matt [1])	**1789 N-45M-500**	2CKA001751A3368	10

[1]) Surface painted.

Rocker for Switch/push button, Single rocker

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way. Including sealing set to achive IP44.
Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
studio white	**1789 NWD-44G**	2CKA001751A3409	10
studio white, matt [1])	**1789 NWD-44M**	2CKA001751A3410	10
black matt [1])	**1789 NWD-45M**	2CKA001751A3412	10

[1]) Surface painted.

Rocker with legend Symbol "Socket" for Switch/push button, Single rocker

With "Plug" icon. As cov er for flush-mounted switch 1g1w DP and 3pole with neon lens and marking "I O" As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1789 ST-44G**	2CKA001751A3381	10
studio white, matt [1])	**1789 ST-44M**	2CKA001751A3382	10
black matt [1])	**1789 ST-45M**	2CKA001751A3384	10

[1]) Surface painted.

Rocker with legend Symbol "light" for Switch/push button, Single rocker

With >Light< icon. For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2520 LI-44G**	2CKA001751A3345	10
studio white, matt [1])	**2520 LI-44M**	2CKA001751A3346	10
black matt [1])	**2520 LI-45M**	2CKA001751A3348	10

[1]) Surface painted.

Rocker Symbol "bell" for Switch/push button, Single rocker

With >Bell< icon. For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2520 KI-44G**	2CKA001751A3341	10
studio white, matt [1])	**2520 KI-44M**	2CKA001751A3342	10
black matt [1])	**2520 KI-45M**	2CKA001751A3344	10

[1]) Surface painted.

Busch-art linear®

Rocker switches / push switches

Rocker with legend Symbol "Key" for Switch/push button, Single rocker

With >Key< icon. For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2520 TR-44G**	2CKA001751A3349	10
studio white, matt [1])	**2520 TR-44M**	2CKA001751A3350	10
black matt [1])	**2520 TR-45M**	2CKA001751A3352	10

[1]) Surface painted.

Rocker with labelling field Symbol "bell" for Switch/push button, Single push button

With >Bell< icon. For flush-mounted push switch. Size of labelling field: 49,4 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1764 N/KI-44G**	2CKA001731A4025	10
studio white, matt [1])	**1764 N/KI-44M**	2CKA001731A4026	10
black matt [1])	**1764 N/KI-45M**	2CKA001731A4028	10

[1]) Surface painted.

Rocker with legend Symbol "light" for Switch/push button, Single rocker

With >Light< icon. As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1789 LI-44G**	2CKA001751A3373	10
studio white, matt [1])	**1789 LI-44M**	2CKA001751A3374	10
black matt [1])	**1789 LI-45M**	2CKA001751A3376	10

[1]) Surface painted.

Rocker with labelling field for Switch/push button, Single push button

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch. Size of labelling field: 49,4 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1764 N-44G**	2CKA001731A4021	10
studio white, matt [1])	**1764 N-44M**	2CKA001731A4022	10
black matt [1])	**1764 N-45M**	2CKA001731A4024	10

[1]) Surface painted.

Rocker with legend Symbol "Key" for Switch/push button, Single rocker

With >Key< icon. For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1789 TR-44G**	2CKA001751A3377	10
studio white, matt [1])	**1789 TR-44M**	2CKA001751A3378	10
black matt [1])	**1789 TR-45M**	2CKA001751A3380	10

[1]) Surface painted.

Rocker with legend Characters 0 and 1 for Switch/push button, Single rocker

With imprint >0< and >I<. As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1788-44G**	2CKA001751A3353	10
studio white, matt [1])	**1788-44M**	2CKA001751A3354	10
black matt [1])	**1788-45M**	2CKA001751A3356	10

[1]) Surface painted.

Rocker with legend Symbol "bell" for Switch/push button, Single rocker

With >Bell< icon. For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1789 KI-44G**	2CKA001751A3369	10
studio white, matt [1])	**1789 KI-44M**	2CKA001751A3370	10
black matt [1])	**1789 KI-45M**	2CKA001751A3372	10

[1]) Surface painted.

Rocker with legend Heizung for Switch/push button, Single rocker

With marking "Heizung". As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way. As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1789 H-44G**	2CKA001751A3357	10
studio white, matt [1])	**1789 H-44M**	2CKA001751A3358	10
black matt [1])	**1789 H-45M**	2CKA001751A3360	10

[1]) Surface painted.

Busch-art linear®

Rocker switches / push switches

Rocker for Switch/push button Single rocker

Rocker for 2051 U Electronic insert, push button 3gang, with control light.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2570-10-44G**	2CKA001751A3325	1
studio white, matt [1])	**2570-10-44M**	2CKA001751A3326	1
black matt [1])	**2570-10-45M**	2CKA001751A3328	1

[1]) Surface painted.

Rocker for Switch/push button Two-part rocker

Rocker for 2052 U Electronic insert, push button 3gang, with control light.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2570-20-44G**	2CKA001751A3317	10
studio white, matt [1])	**2570-20-44M**	2CKA001751A3318	10
black matt [1])	**2570-20-45M**	2CKA001751A3320	10

[1]) Surface painted.

Rocker for Switch/push button Three-part rocker

Rocker for 2053 U Electronic insert, push button 3gang, with control light.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2570-30-44G**	2CKA001751A3329	1
studio white, matt [1])	**2570-30-44M**	2CKA001751A3330	1
black matt [1])	**2570-30-45M**	2CKA001751A3332	1

[1]) Surface painted.

Flush Mounted Inserts Flush-mounted installation boxes and inserts

El. push-switch insert

Colour	Type	Order code	Pack/Qty.
	2051 U	2CKA001413A1115	10

Flush Mounted Inserts Black

El. push-switch insert 2g

Colour	Type	Order code	Pack/Qty.
	2052 U	2CKA001413A1116	10

Flush Mounted Inserts Black

El. push-switch insert 2g

Colour	Type	Order code	Pack/Qty.
	2053 U	2CKA001413A1117	10

Cover plate with legend Symbol "Card" incl. Hotel card switch NEW

Suitable for cards sized 54 x 86 mm.
The inner part of the cover plate is made of light-conducting plastic, so that the card slot is illuminated.
With card switch insert 16 A, 2 pole NO,
including a white LED lamp 230V; 0,2 mA as indicator light.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1792 U-44G**	2CKA001710A4240	10
studio white, matt [1])	**1792 U-44M**	2CKA001710A4241	10
black matt [1])	**1792 U-45M**	2CKA001710A4243	10

[1]) Surface painted.

Cover plate with legend for RFID Hotel card NEW

Cover for Card switch insert RFID 2025 RFID U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1792 RFID-44G**	2CKA001710A4244	10
studio white, matt [1])	**1792 RFID-44M**	2CKA001710A4245	10
black matt [1])	**1792 RFID-45M**	2CKA001710A4247	10

[1]) Surface painted.

Busch-art linear®

Rocker switches / push switches

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

Card switch insert RFID.

Colour	Type	Order code	Pack/Qty.
	2025 RFID U	2CKA001012A2242	10

Rocker with legend DND, MUR for Switch/push button, Two-part rocker

As cover for flush-mounted rocker control switch insert, DND/MUR. DO NOT DISTURB MAKE UP ROOM.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1785/11 K-44G**	2CKA001751A3309	10
studio white, matt [1])	**1785/11 K-44M**	2CKA001751A3310	10
black matt [1])	**1785/11 K-45M**	2CKA001751A3312	10

[1]) Surface painted.

Rocker with legend for Switch/push button Two-part rocker

Rocker for 2058 UK Switch insert DND/MUR.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2058-24-44G**	2CKA001751A3313	10
studio white, matt [1])	**2058-24-44M**	2CKA001751A3314	10
black matt [1])	**2058-24-45M**	2CKA001751A3316	10

[1]) Surface painted.

Rocker switch insert DND/MUR [1])



With LED.
Rated voltage: 250 V~
Rated current: 10 AX - Suitable for: LEDi / CFLi
Rated power: 100 W - Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028 UK	2CKA001012A2240	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker switch insert DND/MUR [1])



With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028/12 UK	2CKA001012A2241	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Flush Mounted Inserts [1])

El. push-switch DND/MUR

Colour	Type	Order code	Pack/Qty.
	2058 UK	2CKA001413A1114	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Bell push-switch DND / MUR 230V

Switch insert DND, MUR Single push button
Push button 1 pole, 1NO
with LED
Rated voltage: 250 V~
Rated current: 10 A
IEC 60669-1
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2029 UC-44G**	2CKA001751A3405	1
studio white, matt [1])	**2029 UC-44M**	2CKA001751A3406	1
black matt [1])	**2029 UC-45M**	2CKA001751A3408	1

[1]) Surface painted.

Bell push-switch DND / MUR 5...24 V

Switch insert DND, MUR Single push button
Push button 1 pole, 1NO
with LED
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2029/12 UC-44G**	2CKA001751A3401	10
studio white, matt [1])	**2029/12 UC-44M**	2CKA001751A3402	10
black matt [1])	**2029/12 UC-45M**	2CKA001751A3404	10

[1]) Surface painted.

Busch-art linear®

Rocker switches / push switches

Bell push-switch DND / MUR 24 V

Switch insert DND, MUR Single push button
Push button 1 pole, 1NO
with LED
Rated voltage: 5 ... 24 V AC/DC
Rated current: 0.05 A
Protection class (Device): IP 20
IEC 60669-1
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2059 UC-44G**	2CKA001751A3321	10
studio white, matt [1]	**2059 UC-44M**	2CKA001751A3322	10
black matt [1]	**2059 UC-45M**	2CKA001751A3324	10

[1] Surface painted.

Three-step rotary switch [1] [2] SP, with zero position

With zero position.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710 U	2CKA001101A0918	1/10

[1] Install only in conjunction with wall boxes ø 60 mm.
[2] Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Three-step rotary switch [1] [2] SP, without zero position

Without zero position.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710/1 U	2CKA001101A0919	1/10

[1] Install only in conjunction with wall boxes ø 60 mm.
[2] Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Mechanical Controls Symbol "0-1-2-3" for Level switch, Turn button

As cover for flush mounted three-step rotary switch.
With zero position. For insert 2710 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2542 DR/01-44G**	2CKA001710A4149	10
studio white, matt [1]	**2542 DR/01-44M**	2CKA001710A4150	10
black matt [1]	**2542 DR/01-45M**	2CKA001710A4152	10

[1] Surface painted.

Cover plate with legend Symbol "1-2-3" for Level switch, Turn button NEW

As cover for flush mounted three-step rotary switch.
Without zero position. For insert 2710/1 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2542 DR/02-44G**	2CKA001710A4153	10
studio white, matt [1]	**2542 DR/02-44M**	2CKA001710A4154	10
black matt [1]	**2542 DR/02-45M**	2CKA001710A4156	10

[1] Surface painted.

Busch-art linear®

Rocker switches / push switches

Friends of Hue smart switch insert.
Wall-mounted transmitter, 2 / 4 channel.

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx. Smarter light switches for wireless remote control of Philips Hue lamps. For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology. Combinable with the Busch-Jaeger switch ranges: carat®,carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
	6716/01 U-500	2CKA006710A0014	1

Bluetooth Low Energy (BLE) smart switch insert.
Wall transmitter, 2 / 4 channel.

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx.
- Smart switch for wireless remote control of radio components.
- Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Depending on the ecosystem, the wireless range is automatically extended via mains-powered BT mesh devices (repeater function).
- Encrypted transmission with AES-128 (CBC mode) and sequence counter.
- Contains NFC configuration interface according to NFC Forum Type 2 Tag (ISO/IEC 14443 Part 2 + 3).
- Therefore particularly simple commissioning of BLE radio components from Casambi.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
BT smart switch insert (SF)	**6716/01 UBT-500**	2CKA006710A0015	1

Smart Switch, WL NEW

Smart light-/blind switch for wireless control of Busch-flexTronics® wireless and Busch-free@home® devices.
Wall-mounted transmitter, 2/4 channels.
Operation in ABB-flexTronics® wireless with up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required. Programming with the ABB-free@home® Next App. Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes. Combinable with the Busch-Jaeger switch range Busch-art linear®.

Colour	Type	Order code	Pack/Qty.
	62721/01 U-WL-500	2CKA006710A0052	1

Rocker 1 gang, without printing

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Colour	Type	Order code	Pack/Qty.
white	**6735 BT-44G**	2CKA001751A3413	10
white	**6735 BT-44M**	2CKA001751A3414	10
black	**6735 BT-45M**	2CKA001751A3416	10

[1] Surface painted.

Rocker 2 gang, without printing

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Colour	Type	Order code	Pack/Qty.
white	**6736 FoH-44G**	2CKA006730A0166	1
white	**6736 FoH-44M**	2CKA006730A0167	1
black	**6736 FoH-45M**	2CKA006730A0169	1

[1] Surface painted.

Rocker 1gang, with "Blind" icon NEW

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Colour	Type	Order code	Pack/Qty.
44G white	**6735-11-44G**	2CKA006220A0993	1
44M white matt	**6735-11-44M**	2CKA006220A0994	1
45M black matt	**6735-11-45M**	2CKA006220A0996	1

Busch-art linear®

Dimmers

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
Flush-mounted, LED, 2-100 W

With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
Via mode switch adjustable between leading edge control and trailing edge control.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With adjustable minimum brightness.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10%
Rated frequency: 50 Hz/60 Hz
Nominal power: 2 - 100 W/VA (retrofit LED loads).
Nominal power: 10 - 250 W/VA (non-LED loads).
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6523 U-102-500	2CKA006512A0335	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
Turn/push button 230 V 2...400 V·A

Very small installation depth: < 20 mm.
With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without cover plate. Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz Nominal power: 2 - 100 W/VA (leading edge control) Nominal power: 2 - 400 W/VA (trailing edge control)

Colour	Type	Order code	Pack/Qty.
	6523 UR-104-500	2CKA006512A0354	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-art linear®
Dimmers

Busch-rotary dimmer [1] [2] [3] [4] flush mounted, 1-10V

With rotary control.
For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control gears
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 700 W/VA
IEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	2112 U-101-500	2CKA006599A2873	1/10

[1] Non-illuminable.
[2] Use cover plates 2115 J-.../2115-.../6540-... .
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Making-current limiters have to be provided in case of too high making currents.

Busch-rotary dimmer [1]
Flush-mounted, DALI, tunable white

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE article no. 2116/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116 U	2CKA006599A3025	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1] Flush-mounted, DALI, with internal power supply, tunable white

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116/11 U	2CKA006599A3026	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-art linear®

Dimmers

Busch-rotary dimmer [1]) flush mounted, DALI

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
An additional DALI power supply is needed, e.g. by Tridonic, Philips, Helvar or 2117/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117 U-500	2CKA006599A2987	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1])
flush mounted, DALI, with internal power supply

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117/11 U-500	2CKA006599A2988	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-art linear®

Rocker switches / push switches

ABB flexTronics inserts

Cover Plate for Dimmer Turn button with Neon lamp NEW

Elevated knob. For Busch-Dimmer®. For inserts 2112 U-101/2247 U/2250 U/6513 U-102/6517 U-10x/6519 U/6520 U/6523 U(R)(10x) /6591 U-10x and 6592 U. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**6540-44G-102-500**	2CKA006599A3056	10
studio white, matt [1])	**6540-44M-102-500**	2CKA006599A3057	10
black matt [1])	**6540-45M-102-500**	2CKA006599A3059	10

[1]) Surface painted.

Relay insert flex, 1gang [1])

3 wire connection (neutral conductor required).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical. Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 2300 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Relay insert flex, 2gang [1])

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... . For Busch-Watchdog 180 flex sensors 6476x-...
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-art linear®

ABB flexTronics inserts

e-contact insert flex, 1gang [1] [2]

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1] Use only dimmable high-voltage LEDs.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6]
FM, LED, 3-240 VA

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi)
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x dimming channel
Suitable for: 230 V LEDi, typical (leading edge control)
Rated power: 3 - 100 VA
Suitable for:230 V LEDi, typical (trailing edge control)
Rated power: 3 - 240 W
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-art linear®

ABB flexTronics inserts

Extension insert flex [1)]

3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Control/Signal outputs: 1, electronic output, potential-bound. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 1 gang, flex wireless

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Busch-art linear®

Rocker switches / push switches

Rocker 1gang, with “Dimmer” icon

As cover for ABB-free@home® sensor units (e.g. 6221/1.0) and sensor/actuator units (e.g. 6211/1). As cover for KNX 2gang push-button coupling unit (6108/06-500).

Colour	Type	Order code	Pack/Qty.
studio white	**6234-10-44G**	2CKA006220A0932	10
studio white, matt [1])	**6234-10-44M**	2CKA006220A0933	10
black matt [1])	**6234-10-45M**	2CKA006220A0935	10

[1]) Surface painted.

Rocker 1gang, with “Light” icon

As cover for ABB-free@home® sensor units (e.g. 6221/1.0) and sensor/actuator units (e.g. 6211/1). As cover for KNX 2gang push-button coupling unit (6108/06-500).

Colour	Type	Order code	Pack/Qty.
studio white	**6231-10-44G**	2CKA006220A0928	10
studio white, matt [1])	**6231-10-44M**	2CKA006220A0929	10
black matt [1])	**6231-10-45M**	2CKA006220A0931	10

[1]) Surface painted.

Rocker 2gang left, with “Dimmer” icon

As a cover for ABB-free@home® sensor units (e.g. 6221/2.0) and sensor/actuator units (e.g. 6211/2). As cover for KNX 4gang push-button coupling unit (6108/07).

Colour	Type	Order code	Pack/Qty.
studio white	**6234-21-44G**	2CKA006220A0956	10
studio white, matt [1])	**6234-21-44M**	2CKA006220A0957	10
black matt [1])	**6234-21-45M**	2CKA006220A0959	10

[1]) Surface painted.

Rocker 1gang, with “Scene” icon

As cover for ABB-free@home® sensor units (e.g. 6221/1.0) and sensor/actuator units (e.g. 6211/1). As cover for KNX 2gang push-button coupling unit (6108/06-500).

Colour	Type	Order code	Pack/Qty.
studio white	**6233-10-44G**	2CKA006220A0940	10
studio white, matt [1])	**6233-10-44M**	2CKA006220A0941	10
black matt [1])	**6233-10-45M**	2CKA006220A0943	10

[1]) Surface painted.

Rocker 2gang right, with “Dimmer” icon

As a cover for ABB-free@home® sensor units (e.g. 6221/2.0) and sensor/actuator units (e.g. 6211/2). As cover for KNX 4gang push-button coupling unit (6108/07).

Colour	Type	Order code	Pack/Qty.
studio white	**6234-22-44G**	2CKA006220A0960	10
studio white, matt [1])	**6234-22-44M**	2CKA006220A0961	10
black matt [1])	**6234-22-45M**	2CKA006220A0963	10

[1]) Surface painted.

Rocker 2gang left and right

As a cover for ABB-free@home® sensor units (e.g. 6221/2.0) and sensor/actuator units (e.g. 6211/2). As cover for KNX 4gang push-button coupling unit (6108/07).

Colour	Type	Order code	Pack/Qty.
studio white	**6230-20-44G**	2CKA006220A0944	10
studio white, matt [1])	**6230-20-44M**	2CKA006220A0945	10
black matt [1])	**6230-20-45M**	2CKA006220A0947	10

[1]) Surface painted.

Rocker 1gang

As cover for ABB-free@home® sensor units (e.g. 6221/1.0) and sensor/actuator units (e.g. 6211/1). As cover for KNX 2gang push-button coupling unit (6108/06-500).

Colour	Type	Order code	Pack/Qty.
studio white	**6230-10-44G**	2CKA006220A0924	10
studio white, matt [1])	**6230-10-44M**	2CKA006220A0925	10
black matt [1])	**6230-10-45M**	2CKA006220A0927	10

[1]) Surface painted.

Rocker 2gang left, with “Light” icon

As a cover for ABB-free@home® sensor units (e.g. 6221/2.0) and sensor/actuator units (e.g. 6211/2). As cover for KNX 4gang push-button coupling unit (6108/07).

Colour	Type	Order code	Pack/Qty.
studio white	**6231-21-44G**	2CKA006220A0948	10
studio white, matt [1])	**6231-21-44M**	2CKA006220A0949	10
black matt [1])	**6231-21-45M**	2CKA006220A0951	10

[1]) Surface painted.

Busch-art linear®

Rocker switches / push switches

Rocker 2gang right, with “Light” icon

As cover for ABB-free@home® sensor units and sensor/actuator units As cover for KNX 4gang push-button coupling unit (6108/07).

Colour	Type	Order code	Pack/Qty.
studio white	**6231-22-44G**	2CKA006220A0952	10
studio white, matt [1])	**6231-22-44M**	2CKA006220A0953	10
black matt [1])	**6231-22-45M**	2CKA006220A0955	10

[1]) Surface painted.

Rocker 2gang left, with “Scene” icon

As a cover for ABB-free@home® sensor units (e.g. 6221/2.0) and sensor/actuator units (e.g. 6211/2). As cover for KNX 4gang push-button coupling unit (6108/07).

Colour	Type	Order code	Pack/Qty.
studio white	**6233-21-44G**	2CKA006220A0968	10
studio white, matt [1])	**6233-21-44M**	2CKA006220A0969	10
black matt [1])	**6233-21-45M**	2CKA006220A0971	10

[1]) Surface painted.

Rocker 2gang right, with “Scene” icon

As a cover for ABB-free@home® sensor units (e.g. 6221/2.0) and sensor/actuator units (e.g. 6211/2). As cover for KNX 4gang push-button coupling unit (6108/07).

Colour	Type	Order code	Pack/Qty.
studio white	**6233-22-44G**	2CKA006220A0972	10
studio white, matt [1])	**6233-22-44M**	2CKA006220A0973	10
black matt [1])	**6233-22-45M**	2CKA006220A0975	10

[1]) Surface painted.

Rocker 2gang left, with "Play/Paus" icon

As a cover for ABB-free@home® sensor units (e.g. 6221/2.0) and sensor/actuator units (e.g. 6211/2). As cover for KNX 4gang push-button coupling unit (6108/07).

Colour	Type	Order code	Pack/Qty.
studio white	**6237-21-44G**	2CKA006220A0976	10
studio white, matt [1])	**6237-21-44M**	2CKA006220A0977	10
black matt [1])	**6237-21-45M**	2CKA006220A0979	10

[1]) Surface painted.

Rocker 2gang right, with "Volume" icon

As a cover for ABB-free@home® sensor units (e.g. 6221/2.0) and sensor/actuator units (e.g. 6211/2). As cover for KNX 4gang push-button coupling unit (6108/07).

Colour	Type	Order code	Pack/Qty.
studio white	**6237-22-44G**	2CKA006220A0980	10
studio white, matt [1])	**6237-22-44M**	2CKA006220A0981	10
black matt [1])	**6237-22-45M**	2CKA006220A0983	10

[1]) Surface painted.

Busch-art linear®

Movement sensors

Busch-Comfort switch® Control Element Movement sensor

Movement detector push-button switch combination. For switching lighting systems that depend on brightness and movement. With select lens, prevents detection of smaller animal. Push switch function possible at all times. With notice LED when manual operation is necessary. Extension of the detection range by main unit/extension unit combination. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Additional activation/deactivation option via push-button input on the flush-mounted insert. Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off. Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off. Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off. With continuous light/continuous Off function. Adjusting elements on rear side. Surveillance density: 9 sectors with 28 switching segments.
Switch off delay: 1 to 10 min., adjustable.
Compatible with all ABB flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500
For relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Display elements: LED for status display.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Brightness limit value: 5 Lux - daytime operation
Hight above the wall: 21 mm.
The range specifications refer only to an ambient temperature of 21°C. Please order the respective flush-mounted insert separately.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**64765-44G**	2CKA006800A3144	1
studio white, matt [3])	**64765-44M**	2CKA006800A3145	1
black matt [3])	**64765-45M**	2CKA006800A3147	1

[1]) Please order the respective flush-mounted insert separately.
[2]) The range specifications refer only to an ambient temperature of 21°C.
[3]) Surface painted.

Busch-Watchdog 180 flex, comfort sensor wireless [1]) [2]) with select-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. ./. Compatible with all free@home flex inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 22 mm. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**64761-44G-500**	2CKA006800A3124	1
studio white, matt [3])	**64761-44M-500**	2CKA006800A3125	1
black matt [3])	**64761-45M-500**	2CKA006800A3127	1

[1]) Please order the respective flush-mounted insert separately.
[2]) The range specifications refer only to an ambient temperature of 21°C.
[3]) Surface painted.

Busch-Watchdog 180 flex, comfort sensor [1]) [2]) with multi-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**64764-44G-500**	2CKA006800A3140	1
studio white, matt [3])	**64764-44M-500**	2CKA006800A3141	1
black matt [3])	**64764-45M-500**	2CKA006800A3143	1

[1]) Please order the respective flush-mounted insert separately.
[2]) The range specifications refer only to an ambient temperature of 21°C.
[3]) Surface painted.

Busch-Watchdog 180 flex, comfort sensor wireless [1]) [2]) with select-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. ./. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Works with free@home. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**62762-44G-WL-500**	2CKA006200A0302	1
studio white, matt [3])	**62762-44M-WL-500**	2CKA006200A0303	1
black matt [3])	**62762-45M-WL-500**	2CKA006200A0305	1

[1]) Please order the respective flush-mounted insert separately.
[2]) The range specifications refer only to an ambient temperature of 21°C.
[3]) Surface painted.

Busch-art linear®

Movement sensors

Busch-Watchdog 180 flex, comfort sensor [1] [2] with select-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. ./. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 22 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**64762-44G-500**	2CKA006800A3132	1
studio white, matt [3]	**64762-45M-500**	2CKA006800A3133	1
black matt [3]	**64762-45M-500**	2CKA006800A3135	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with multi-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**62764-44G-WL-500**	2CKA006200A0311	1
studio white, matt [3]	**62764-44M-WL-500**	2CKA006200A0312	1
black matt [3]	**62764-45M-WL-500**	2CKA006200A0314	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Key Switch Insert [1] [2] [3] breaking circuit, 1-pole

For profile semi-cylindrical lock.
In switched-on and switched-off status the key can be pulled out in the central position, respectively.
Delivered without cylindrical lock.
Rated voltage: 250 V~. Rated current: 10 AX
Suitable for: LEDi / CFLi. Rated power: 100 W
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2733 USL-101	2CKA001101A0914	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Use the cylindrical lock according to the enclosed drawing.
[3] See profile semi-cylindrical lock.

Blind switch insert [1] [2] SP, switch

With interlock.
Rated voltage: 250 V~
Rated current: 10 AX
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/4 US-500	2CKA001012A2197	10/100
	2020/4 US-500	2CKA001413A1103	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] These blind switches/push buttons safely prevent a switch-over of the running direction being carried out too quickly.

Busch-art linear®

Blind control / timers

Blind switch insert [1] [2]

With rotary knob/switch and push switch.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi. Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2712 U	2CKA001101A0534	10
	SP, N, E		
	2713 U	2CKA001101A0542	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2]

With rotary knob/push button.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2722 U	2CKA001101A0559	10
	SP, N, E		
	2723 U	2CKA001101A0567	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch/push-switch [1] [2] [3] [4]

For profile semi-cylindrical lock/switch and push-switch.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2712 USL-101	2CKA001101A0872	10
	SP, N, E		
	2713 USL-101	2CKA001101A0880	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2] [3] [4]

For profile semi-cylindrical lock/push-button.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
British Standard EN 60669-1, IEC60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2722 USL-101	2CKA001101A0898	10
	SP, N, E		
	2723 USL-101	2CKA001101A0906	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

DIN profile-semi cylindrical lock

Acc. to German Standard DIN 18252.
Total length 40 mm
for blind switches and push switches
For inserts 2712/2713/2722/2723/2733 USL-101 and 2712/2733 SLW-5x.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	different lock mechanism, with 3 keys		
	0520 PZ-VS	2CKA000470A0013	1/100
	lock mechanism, with 3 keys		
	0521 PZ-GS	2CKA000470A0021	1/100

Busch-art linear®

Blind control / timers

Blind compact timer

Suitable for blind and roller blind drives with mechanical or electronic limit switch shut-off. Without extension unit input. Running time: 3 min. N-busbar connection is required. For manual and time-controlled switching of blinds and roller blinds. Memory function for the simple storage of switching times. The controlled devices can be manually operated at any time. Simple setting via display with with segment display and background illumination. Factory pre-set switching times, individual adaptations are possible. 2 switching times per day can be freely adjusted for each day of the week. Automatic switchover from summer time to winter time (switch-off function). Switching times and programs are safely stored in the event of a mains power failure. Power reserve for time and date > 10 years. Simple toggling between manual/ automatic/vacation modes. See the associated cover plates 6435-xx. Programming possible only with control element attached and energized. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz
Outputs: 2x Normally open contact
Rated current: 3 A, cos ϕ 0.5. Rated power: 690 VA
Temperature range (Device): 0 °C to 45 °C

Colour	Type	Order code	Pack/Qty.
	6422 U-500	2CKA006410A0410	1/10

Busch-Short-time timer insert [1]) countdown timer

For time-programmed switching of electrical consumers.
With control cover, without cover plate.
Minimum timer time: 1 second.
Maximum timer time: 9:59:59 hours.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 1x Normally open contact
Rated current: 10 A, cos ϕ 1
Rated power: 2300 VA
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6465 U-101-500	2CKA006410A0393	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
Cover frames:	1gang frame 1721 BS-2xG or Dual Box frame 1722 BSDB-2xG.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-art linear®

Blind control / timers

Rocker with legend Symbol "arrows" for Venetian blind, Two-part rocker

As cover for flush-mounted blind control switch/push switch. For inserts 2000/4 and 2020/4 US.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1785 JA-44G-500**	2CKA001751A3397	10
studio white, matt [1])	**1785 JA-44M-500**	2CKA001751A3398	10
black matt [1])	**1785 JA-45M-500**	2CKA001751A3400	10

[1]) Surface painted.

Cover Plate Symbol "arrows" for Venetian blind, Turn button NEW

As cover for flush-mounted blind control switch/push switch. For inserts 2712 U, 2713 U and 2722 U, 2723 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1740-44G**	2CKA001710A4141	10
studio white, matt [1])	**1740-44M**	2CKA001710A4142	10
black matt [1])	**1740-45M**	2CKA001710A4144	10

[1]) Surface painted.

Cover Plate Symbol "arrows" or "0 - 1" for Venetian blind, Key NEW

With marking. For half-cylindrical type switches and blind control switch/push-switch. For inserts 2733 USL-101 and 2712 USL-101, 2713 USL-101, 2722 USL-101, 2723 USL-101.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1755 SL/PZ-44G**	2CKA001710A4157	1
studio white, matt [1])	**1755 SL/PZ-44M**	2CKA001710A4158	1
black matt [1])	**1755 SL/PZ-45M**	2CKA001710A4160	1

[1]) Surface painted.

Busch-art linear®

Rocker switches / push switches

Time switch mechanism 16 A [1] [2] DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 15 min
For time-programmed switching of electrical consumers.
Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird.
Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist.
Rated voltage: 230 V~, +10 % / -10 %
Rated current: 16 A, cos ϕ 0.25
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1070 U	2CKA001043A0025	1/10

[1] For screw-fixing only
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Time switch mechanism 16 A [1] [2] DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 120 min. For time-programmed switching of electrical consumers. Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird. Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist.
Rated voltage: 230 V~, +10 % / -10 %
Rated current: 16 A, cos ϕ 0.25
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1071 U	2CKA001043A0124	1

[1] For screw-fixing only
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate with legend for Time switch NEW



For room thermostats 1098 U-101 and 1098 UF-101. For short-time timer 6465 U-101. For Busch-CO2 sensor 1091 U-500. For blind compact timer 6422 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**6435-44G**	2CKA006430A0450	10
studio white, matt [1]	**6435-44M**	2CKA006430A0451	10
black matt [1]	**6435-45M**	2CKA006430A0453	10

[1] Surface painted.

Cover Plate 1 ... 15 Min for Time switch, Toggle white

For Busch-Timer insert 1070 U. Running time: 15 min.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**1770-44G-103**	2CKA001753A9982	10
white	**1770-44M-103**	2CKA001753A9983	10
black	**1770-45M-103**	2CKA001753A9985	10

Cover Plate 10 ... 120 Min for Time switch, Toggle white

For Busch-Timer insert 1071 U. Running time: 120 min.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**1771-44G-103**	2CKA001753A9978	10
white	**1771-44M-103**	2CKA001753A9979	10
black	**1771-45M-103**	2CKA001753A9981	10

Busch-art linear®

Blind control / timers

Blind insert, 1 gang, 2 way flex

3 wire connection (neutral conductor required). For the control of roller shutters, blind and awning motors with mechanical or electronic limit switch shut-off. Group formation via extension input possible. Operation also via conventional push buttons (2020 US non-illuminated/2021/6 UK) possible. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL.

Colour	Type	Order code	Pack/Qty.
	64831 U-500	2CKA006400A0096	1

Weather Station

For recording and transmitting of brightness, temperature, wind speed and rain. Weather data can be linked with actuators to automatically control functions. Weather data can be visualized in the free@home web interface and the free@home app. Remote operation via the Bluetooth and smartphone/tablet app.

Colour	Type	Order code	Pack/Qty.
	WS-1-WL.1	2CKA006200A0297	1

Standard Inputs

WS-1/A1.1 Mast adapter weather station

Colour	Type	Order code	Pack/Qty.
	WS-1/A1.1	2CKA006200A0848	1

Rocker 1gang, with “Jalousie” icon

As cover for ABB-free@home® sensor units (e.g. 6221/1.0) and sensor/actuator units (e.g. 6211/1). As cover for KNX 2gang push-button coupling unit (6108/06-500).

Colour	Type	Order code	Pack/Qty.
studio white	**6232-10-44G**	2CKA006220A0936	10
studio white, matt [1])	**6232-10-44M**	2CKA006220A0937	10
black matt [1])	**6232-10-45M**	2CKA006220A0939	10

[1]) Surface painted.

Rocker 2gang left and right, with “Jalousie” icon

As a cover for ABB-free@home® sensor units (e.g. 6221/2.0) and sensor/actuator units (e.g. 6211/2). As cover for KNX 4gang push-button coupling unit (6108/07).

Colour	Type	Order code	Pack/Qty.
studio white	**6232-20-44G**	2CKA006220A0964	10
studio white, matt [1])	**6232-20-44M**	2CKA006220A0965	10
black matt [1])	**6232-20-45M**	2CKA006220A0967	10

[1]) Surface painted.

Rocker 2gang right, with “Scene” icon

As a cover for ABB-free@home® sensor units (e.g. 6221/2.0) and sensor/actuator units (e.g. 6211/2). As cover for KNX 4gang push-button coupling unit (6108/07).

Colour	Type	Order code	Pack/Qty.
studio white	**6233-22-44G**	2CKA006220A0972	10
studio white, matt [1])	**6233-22-44M**	2CKA006220A0973	10
black matt [1])	**6233-22-45M**	2CKA006220A0975	10

[1]) Surface painted.

Busch-art linear®

Rocker switches / push switches

Socket insert Safety Shutter Protective contact (SCHUKO)

With screwless terminals. DP (2 P + E), extra flat.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20-1 EUCBF-44G-500**	2CKA002013A5525	10
studio white, matt [1])	**20-1 EUCBF-44M-500**	2CKA002013A5526	10
black matt [1])	**20-1 EUCBF-45M-500**	2CKA002013A5528	10

[1]) Surface painted.

Socket insert Safety Shutter Protective contact (SCHUKO)

Without claws.
With screwless terminals. DP (2 P + E).
Shuttered.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20 EUCRB-44G-500**	2CKA002013A5501	10
studio white, matt [1])	**20 EUCRB-44M-500**	2CKA002013A5502	10
black matt [1])	**20 EUCRB-45M-500**	2CKA002013A5504	10

[1]) Surface painted.

Socket insert Safety Shutter Protective contact (SCHUKO)

With screwless terminals. DP (2 P + E)
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20 EUCB-44G-500**	2CKA002013A5493	10
studio white, matt [1])	**20 EUCB-44M-500**	2CKA002013A5494	10
black matt [1])	**20 EUCB-45M-500**	2CKA002013A5496	10

[1]) Surface painted.

Socket insert Safety Shutter Protective contact (SCHUKO)

With screw-type terminals. DP (2 P + E).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**23 EUCB-44G**	2CKA002013A5505	10
studio white, matt [1])	**23 EUCB-44M**	2CKA002013A5506	10
black matt [1])	**23 EUCB-45M**	2CKA002013A5508	10

[1]) Surface painted.

Busch-art linear®

Rocker switches / push switches

SCHUKO® USB socket outlet, 2gang [1] [2] [3] shuttered

SCHUKO®/USB A&C socket outlet
With screwless terminals.
For connecting electric loads.
For supply and support of mobile devices via USB-cable.
Simultaneous charging via USB connection and use of the SCHUKO® socket outlet.
With 1x USB type A and 1x USB type C outputs.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Connecting terminals approved in accordance with VDE 0620-1 as connectors.
No data transfer between USB ports.
Use dust cover 2098 for USB-A port when cleaning the device.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20 EUCB2USBAC-44G**	2CKA002011A6316	1
studio white, matt [4]	**20 EUCB2USBAC-44M**	2CKA002011A6318	1
black matt [4]	**20 EUCB2USBAC-45M**	2CKA002011A6322	1

[1] Increased shock protection.
[2] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[3] No data transfer.
[4] Surface painted.

Busch-steplight SCHUKO® socket insert Safety Shutter with Night light; LED /White

with separate connection cables for switch contact.
with LED, Shuttered. DP (2 P + E).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20 EUCBLI-44G**	2CKA002013A5517	1
studio white, matt [1]	**20 EUCBLI-44M**	2CKA002013A5518	1
black matt [1]	**20 EUCBLI-45M**	2CKA002013A5520	1

[1] Surface painted.

Socket insert Safety Shutter Protective contact (SCHUKO)

Size of labelling field. With screwless terminals. DP (2 P + E) Shuttered.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20 EUCNB-44G**	2CKA002013A5509	1
studio white, matt [1]	**20 EUCNB-44M**	2CKA002013A5510	1
black matt [1]	**20 EUCNB-45M**	2CKA002013A5512	1

[1] Surface painted.

Socket insert Safety Shutter Protective contact (SCHUKO) with Control light; LED /Green

Shuttered. DP (2 P + E) With transparent lens. LED colour green.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20 EUCBL-44G**	2CKA002013A5513	1
studio white, matt [1]	**20 EUCBL-44M**	2CKA002013A5514	1
black matt [1]	**20 EUCBL-45M**	2CKA002013A5516	1

[1] Surface painted.

Socket insert Safety Shutter Protective contact (SCHUKO) with Hinged Lid

With screwless terminals. DP (2 P + E).
With hinged lid.
Shuttered.
Protection class IP44 by adding 20 WD-4X.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20 EUKB-44G**	2CKA002018A1575	10
studio white, matt [1]	**20 EUKB-44M**	2CKA002018A1576	10
black matt [1]	**20 EUKB-45M**	2CKA002018A1578	10

[1] Surface painted.

Socket insert Safety Shutter Protective contact (SCHUKO) with Hinged Lid

Without claws.
With screwless terminals. DP (2 P + E).
With hinged lid.
Shuttered.
Protection class IP44 by adding 20 WD-4X.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20 EUKBR-44G**	2CKA002018A1579	10
studio white, matt [1]	**20 EUKBR-44M**	2CKA002018A1580	10
black matt [1]	**20 EUKBR-45M**	2CKA002018A1582	10

[1] Surface painted.

IP44 Sealing set socket outlets



IP44 Sealing set for Busch-art linear socket outlets with lid.
Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
transparent	**20 WD-4X**	2CKA001763A0032	1

[1] Surface painted.

Busch-art linear®

Rocker switches / push switches

Shaver socket outlet

For installation into FM 2gang wall box 3030 and 3031.
Rated voltage: 240 V, +10 % / -10 %
Output voltage: 115 V, +10 % / -10 %
Secondary: 240 V, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 20 VA
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2332 UJBS-44G**	2CKA002130A0298	1
studio white, matt [1])	**2332 UJBS-44M**	2CKA002130A0299	1
black matt [1])	**2332 UJBS-45M**	2CKA002130A0301	1

[1]) Surface painted.

Flush-mounting wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 135 mm x 75 mm x 47 mm

Colour	Type	Order code	Pack/Qty.
	3030	2CKA001741A0067	4

Flush-mounting cavity wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 142 mm x 75 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
	3031	2CKA001741A0068	4

Cover plate

Universal data connection unit, cat. 3 [1]) 1gang

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0213-500	2CKA000230A1549	10/100

[1]) Suitable for cover plate 1803-xxx.

Universal data connection box with down-leading outlet [1]) 2gang internally parallel connected

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0214	2CKA000230A0235	10/100
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Universal data connection box with down-leading outlet [1]) 2 x outlets, 8/8-pole

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0215	2CKA000230A0243	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Busch-art linear®

Cover plate

Data-connection box, RJ 45, cat. 6a iso, shielded [1])
1gang

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without claws.
Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/11-101	2CKA000230A0409	1/10

[1]) Suitable for cover plate 1803-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1])
2 x outlets, 8/8-pole

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For wires of AWG 24-22. Without claws.
Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/12-101	2CKA000230A0411	1/10

[1]) Suitable for cover plate 1803-02-xxx.

Universal data connection box 8(6)/ telephone unit 6F+N - connection box [1]) 2 x 6-pole



With straight outlet, with screw contacts.
Universal data-connection boxes: RJ 11/12, ISDN capable Cat. 3 in acc. with IEC 603-7/German Standard DIN EN 60603-7,
Telecommunication outlet (telephone unit): for 1 telephone, 1 auxiliary device or 1 data transmission unit,
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**UAE 8(6)TAE 6 F+N**	2CKA000230A0381	10/100

[1]) Suitable for cover plate 2539-xxx, 1766-xxx and 1746-2xx-FN.

Satellite co-axial outlets 2 connectors/dead-end feeder

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0230-101	2CKA000230A0250	10/100

Antenna socket insert Radio/TV
2 connectors/loop through type

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0231-101	2CKA000230A0268	10/100

Satellite co-axial outlets Radio/TV/SAT
3gang dead-end feeder

Broadband technology 47-2.150 MHz.
SAT connection designed as screwable F-male plug. with remote feed via F-bush
For DVB-T and broadband-cable-systems.
For analogue and digital transmission.
With claw. Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0232-101-500	2CKA000230A0463	10/100

Terminating resistor 75 Ohm

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0239	2CKA000230A0201	10/100

Busch-art linear®

Rocker switches / push switches

Mounting plate [1] [2] with green insert



For 2 modular jack inserts.
For systems: CommScope (AVAYA / AT&T / Lucent Technologies), GigaSPEED, PowerSUM, 360 GS 10E bis MGS 600-BK, M1 BH-xx, MPS 100E-xx.
With R&M adapter R310694 suitable for R&M connection modules R305111, R305112, R305113 and R305114.
Pitch dimensions: (WxH) approx. 16.9 x 17.9 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1810-500	2CKA001753A9974	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with red insert

For 2 modular jack inserts.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
For systems: AMP / tyco Electronics, BTR, EFB, Krone, Panduit, Quante, Radiall, Setec, Dr.-Ing. Sieger, Telena, Thomas & Betts
For Telegärtner AMJ/UMJ connection modules/ couplings.
For 2 fiber optic modules of the following types: 3M-Volition, Krone, mvk.
Pitch dimensions: (WxH) approx. 14.8 x 19.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1812-500	2CKA001753A9972	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with black insert

For MTRJ or 2 modular jack inserts.
For systems: Ackermann, AMP / tyco Electronics (Slim Line (SL) -SM 2gang/switches: 110Connect Jacks, Toolless Jacks / Standard 110Connect Jacks), Brand-Rex, CombiNet, EFB Electronic, Telena.
For 2 fiber optic modules of the following types: AMP / tyco Electronics MTRJ.
Pitch dimensions: (WxH) approx. 14.8 x 20.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1814-500	2CKA001753A9973	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with orange base

For 2 modular jack inserts.
For system: LexCom 150 and LexCom 250.
Pitch dimensions: (WxH) approx. 15.4 x 15.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1819	2CKA001753A8056	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with grey base

For 2 modular jack inserts.
For system: Panduit MiniCom (Cu. z.B. TX6 10 Gig Shielded Jack modules and fiber optic modules.
Pitch dimensions: (WxH) approx. 15.9 x 18.7 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1820	2CKA001753A8057	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Flush-mounted assembly adapter

For the accommodation of one or two universal modules 0219.
For flush-mounted installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/12	2CKA000230A0395	1/10

Channel assembly adapter

For the accommodation of one or two universal modules 0219.
For channel and under-floor installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/13	2CKA000230A0396	1/10

Busch-art linear®

Cover plate

Universal module, RJ 45, cat. 6a iso, shielded [1]) 1gang

For installation in installation adapter 0219/12 or 0219/13.
Also suited for mounting into cover plate 2561-xxx, 2564-02-xxx and bases 1812, 1866 EB, and 1867 EB.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Cat. 6A according to ISO/IEC 11801: 2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Bend-radius optimised cable feed (30°).
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
For 8-pole plug RJ 45 only.
Housing made from diecast zinc.
With integrated dust-protection cap (can be removed if necessary).
With insulation displacement connection
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219-101	2CKA000230A0413	1/10

[1]) With assembly adapters appropriate for telephone unit cover plates 2539-21x and 1766-xxx.

Modular-Jack insert 6-pole Cat. 3 (AMP-No. 216000-2)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0210	2CKA000225A0078	10

Modular-Jack insert 8-pole Cat. 3 (AMP-No. 216005-4)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0211	2CKA000225A0086	10

Socket insert Safety Shutter Earthing Pin

With screwless terminals. Shuttered. Suitable for the countries like Poland, Czech Republic. DP (2 P + E).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20-1 MUCB-44G**	2CKA002017A1905	10
studio white, matt [1])	**20-1 MUCB-44M**	2CKA002017A1906	10
black matt [1])	**20-1 MUCB-45M**	2CKA002017A1908	10

[1]) Surface painted.

Socket insert Safety Shutter Earthing Pin with Hinged Lid

With screwless terminals. Shuttered. Suitable for the countries like Poland, Czech Republic. DP (2 P + E)
Protection class IP44 by adding 20 WD-4X.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20-1 MUCBK-44G**	2CKA002017A1909	10
studio white, matt [1])	**20-1 MUCBK-44M**	2CKA002017A1910	10
black matt [1])	**20-1 MUCBK-45M**	2CKA002017A1912	10

[1]) Surface painted.

Busch-art linear®

Cover plate

Cover Plate Blind cap with Mounting plate NEW

Cover plate as blind cap. Without visible screw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1742-44G-500**	2CKA001710A4215	10
studio white, matt [1])	**1742-44M-500**	2CKA001710A4216	10
black matt [1])	**1742-45M-500**	2CKA001710A4218	10

[1]) Surface painted.

Cover Plate Cable outlet with Mounting plate; 3-pole screw terminal block NEW

As cover for flex outlet, for cords up to 10.3 mm diameter. With strain relief. With 3-pole screw terminal block.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1749-44G**	2CKA001710A4248	10
studio white, matt [1])	**1749-44M**	2CKA001710A4249	10
black matt [1])	**1749-45M**	2CKA001710A4251	10

[1]) Surface painted.

Cover plate with labelling field Data connection 1 gang NEW

As cover for universal data connection boxes. Art.-No. 0213 (Cat 3/ISDN), 0216-101, 0218/11-101 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck. For WLAN access points 8186/31 and 8186/41. Brand-Rex (WAEGV 8 EKR/EK). BTR (universal data connecting unit design and IAE design). Telegärtner (AMJ 45, UMJ 45). With down-leading outlet. With labelling field. Size of labelling field: 50 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1803-44G-500**	2CKA001710A4223	10
studio white, matt [1])	**1803-44M-500**	2CKA001710A4224	10
black matt [1])	**1803-45M-500**	2CKA001710A4226	10

[1]) Surface painted.

Cover plate with labelling field Data connection 2 gang NEW

As cover for universal data connection boxes. Art. No. 0214, 0215 (Cat 3), 0220/12-507, 0221/12-507, 0218, 0217 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck. Brand-Rex (WAEGV 8/8 EKR/EK). AMP (NETCONNECT 5E). BTR (E-DAT C6, E-DAT design, Universal data connecting unit design and IAE design). cti (cti-wire 2.8 Cat.6). Telegärtner (AMJ 45, UMJ 45). With down-leading outlet. With labelling field. Size of labelling field: 50 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1803-02-44G-500**	2CKA001710A4231	10
studio white, matt [1])	**1803-02-44M-500**	2CKA001710A4232	10
black matt [1])	**1803-02-45M-500**	2CKA001710A4234	10

[1]) Surface painted.

Cover Plate TAE; UAE / TAE; USB / VGA / HDMI / loudspeaker 1 gang NEW

For telephone connection unit. ./. For USB, VGA, HDMI inserts and communication adapter. For loudspeaker connection box. Suitable for part number 0248/0x-101. For data modules. Suitable for Art. No. 0219/12 and 0219/13. For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1766-44G-500**	2CKA001710A4166	10
studio white, matt [1])	**1766-44M-500**	2CKA001710A4167	10
black matt [1])	**1766-45M-500**	2CKA001710A4169	10

[1]) Surface painted.

Cover Plate TV / Radio / SAT 3 gang NEW

With 2 connectors Acc. to German Standard DIN 45330. Radio/TV/SAT. With M3 fixing screw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1743-44G-500**	2CKA001724A4436	10
studio white, matt [1])	**1743-44M-500**	2CKA001724A4437	10
black matt [1])	**1743-45M-500**	2CKA001724A4439	10

[1]) Surface painted.

Busch-art linear®

Cover plate

Cover Plate TV / Radio / 2x SAT 4 gang NEW

As cover for 4gang Antenna socket insert.
Outputs in a trapezoidal arrangement e.g. TV/R/SAT/SAT or TV/R/DATA/DATA or TV/R/SAT/DATA.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1743/10-04-44G**	2CKA001724A4440	10
studio white, matt [1])	**1743/10-04-44M**	2CKA001724A4441	10
black matt [1])	**1743/10-04-45M**	2CKA001724A4443	10

[1]) Surface painted.

Cover Plate Telecommunication inserts 50 x 50 mm NEW

For telecommunication inserts with cover plate 50 x 50 mm. With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1746/10-44G-500**	2CKA001710A4178	10
studio white, matt [1])	**1746/10-44M-500**	2CKA001710A4179	10
black matt [1])	**1746/10-45M-500**	2CKA001710A4181	10

[1]) Surface painted.

Cover plate with labelling field Modular Jack 2 gang NEW

For modular jack with slide entrance. To fit only Art. No. 1810, 1812, 1814, 1816, 1818, 1819 and 1820. With labelling field.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1800-44G**	2CKA001710A4235	10
studio white, matt [1])	**1800-44M**	2CKA001710A4236	10
black matt [1])	**1800-45M**	2CKA001710A4238	10

[1]) Surface painted.

Intermediate Ring for cover plates Busch-Balance® SI NEW

For attaching cover plates from the Busch-balance® SI range. Delivery without cover plate.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1747 BSI-44G**	2CKA001710A4170	10
studio white, matt [1])	**1747 BSI-44M**	2CKA001710A4171	10
black matt [1])	**1747 BSI-45M**	2CKA001710A4173	10

[1]) Surface painted.

Cover Plate Modular Jack 1 gang NEW

For 1 modular jack. Suitable for Art. Nos. 0210, 0211 and 0219-101. Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2561-44G**	2CKA001753A9922	10
studio white, matt [1])	**2561-44M**	2CKA001753A9923	10
black matt [1])	**2561-45M**	2CKA001753A9925	10

[1]) Surface painted.

Cover Plate with Hinged Lid Telecommunication inserts NEW

With hinged lid. For telecommunication inserts with cover plate 50 x 50 mm. With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1746-44G**	2CKA001753A9917	10
studio white, matt [1])	**1746-44M**	2CKA001753A9918	10
black matt [1])	**1746-45M**	2CKA001753A9920	10

[1]) Surface painted.

Cover Plate Modular Jack 2 gang NEW

For 2 modular jack inserts. Suitable for Art. No. 0210 and 0211. Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2561-02-44G**	2CKA001753A9926	10
studio white, matt [1])	**2561-02-44M**	2CKA001753A9927	10
black matt [1])	**2561-02-45M**	2CKA001753A9929	10

[1]) Surface painted.

Intermediate Ring with Hinged Lid for cover plates Busch-Balance® SI 1 gang with Sealing Ring NEW

For attaching cover plates from the Busch-balance® SI range. Delivery without cover plate. With sealing ring. With hinged lid.
Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
studio white	**2518-WD-44G**	2CKA001719A0179	10
studio white, matt [1])	**2518-WD-44M**	2CKA001719A0180	10
black matt [1])	**2518-WD-45M**	2CKA001719A0182	10

[1]) Surface painted.

Busch-art linear®

Cover plate

Cover Plate XLR 1 gang NEW

As cover for Neutrik plug connectors, type D series.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2553-44G**	2CKA001724A4448	10
studio white, matt [1])	**2553-44M**	2CKA001724A4449	10
black matt [1])	**2553-45M**	2CKA001724A4451	10

[1]) Surface painted.

Cover Plate Bore hole 1 gang NEW

With screw-type terminal. Fixed with central locknut.
As cover for pilot devices with a diameter of 22.5 mm
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**2533-44G**	2CKA001724A4444	10
studio white, matt [1])	**2533-44M**	2CKA001724A4445	10
black matt [1])	**2533-45M**	2CKA001724A4447	10

[1]) Surface painted.

Cover plate with labelling field For data connection housing NEW

For communication devices. With labelling field. Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1758-44G**	2CKA001724A4455	10
studio white, matt [1])	**1758-44M**	2CKA001724A4456	10
black matt [1])	**1758-45M**	2CKA001724A4458	10

[1]) Surface painted.

Busch-Radio DAB+ [1])

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Control/Signal outputs: 2, Loudspeaker output, impedance 4 Ohm
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8215 U-101-500	2CKA008200A0276	1/10

[1]) No claw. Screw-fixing via keyholes.

Busch-art linear®

Cover plate

Busch-Radio BTconnect DAB+ [1])
With Bluetooth interface for music replay.

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
With Bluetooth interface for music replay of mobile devices.
Connection of external Bluetooth loudspeakers possible.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Bluetooth specification: 4.2.
Bluetooth profiles supported: A2DP
Number of stored Bluetooth connections: max. 8
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Bluetooth

Colour	Type	Order code	Pack/Qty.
	8217 U-101-500	2CKA008200A0279	1/10

[1]) No claw. Screw-fixing via keyholes.

Loudspeaker insert [1]) 5 cm (2")

With flat plug connector.
With broadband characteristics.
Rated output: 2 W (RMS)
Incl. speaker connection cable.
Frequency response: 200 - 20,000 Hz
Impedance: 4 Ohm
Protection class (Device): IP 20, SELV
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1/10

[1]) No claw. Screw-fixing via keyholes.

Flush Mounted Inserts Flush-mounted installation boxes and inserts

Multi media connector ins.

Colour	Type	Order code	Pack/Qty.
	8231 U	2CKA008200A0223	1/10

[1]) No claw. Screw-fixing via keyholes.

Busch-art linear®

Cover plate

USB power adapter insert, flush-mounted [1] [2] with USB-A & USB-C interface

For supply and support of mobile devices via USB-cable.
With USB type A and USB type C female connector.
To support two devices at the same time.
Supports automatic negotiating of optimum charging parameters for the shortest charging times.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Outputs: 2x USB charging interface
Suitable for: Only USB-A bus occupied:
Rated current: 3000 mA
Output voltage: 5 V-
Suitable for: Only USB-C bus occupied:
Rated power: 18 W
Suitable for: USB-A and USB-C bus occupied. Total:
Rated current: 3250 mA
Output voltage: 5 V-
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.

65 W power adapter insert, flush-mounted [1] [2] with USB-C interface

For power and charge of mobile devices via USB-C cable.
With USB type C female connector.
Supports high power and automatic negotiating of optimum charging parameters for the shortest charging times.
Support of charging protocols: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the Qualcomm quick charge protocols: QC 2.0, 3.0, 4.0 and 5.
Support of USB PD (power delivery): 3.1 incl. PPS (programmable power supply).
Support of manufacturer specific protocolls: Samsung AFC and Huawei FCP (with 20 W).
With electronic short-circuit protection.
With electronic overload protection.
Fitting cover plate: 6479-...-500.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Power loss: < 75 mW
Outputs: 1x USB-C charging interface
Rated power: 65 W
Output voltage: 5 V, 9 V, 12 V, 15 V, 20.0 V DC
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 44 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6479 U-500	2CKA006400A0437	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.

HDMI connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link high-definition digital audio and video data from e.g. SAT-receiver, DVD-/Blue-Ray-player to plasma-type, LCD- or-LED-TVs/screens.
HDMI-type A, 3D-compatible.
Fully HD ready (1920 x 1080 pixel).
For 20-wire HDMI-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/31-500**	2CKA000230A0430	1
grey	**0261/33-500**	2CKA000230A0432	1
alpine white	**0261/32-500**	2CKA000230A0431	1

[1] Please follow the recommendations of the cable and device producers for the max. HDMI cable lengths.

VGA connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link analogue video data between PCs and laptops to monitors or digital projectors etc.
VGA-type: D-type, 15-pole.
Fully HD ready (1920 x 1080 pixel).
For 15-wire VGA-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/21-500**	2CKA000230A0424	1
grey	**0261/23-500**	2CKA000230A0426	1
alpine white	**0261/22-500**	2CKA000230A0425	1

[1] Please follow the recommendations of the cable and device producers for the max. VGA cable lengths.

Busch-art linear®

Cover plate

USB connection unit [1])
with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link mobile devices like e.g. printer, scanner, USB-sticks or digital cameras etc.
USB-type A, USB 2.0 compatible.
For 5-wire USB- cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/11-500**	2CKA000230A0418	1
grey	**0261/13-500**	2CKA000230A0420	1
alpine white	**0261/12-500**	2CKA000230A0419	1

[1]) Please follow the recommendations of the cable and device producers for the max. USB cable lengths.

Communication adapter for BNC-F Duct-jacks

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0262/11-500**	2CKA000230A0436	1
grey	**0262/13-500**	2CKA000230A0438	1
alpine white	**0262/12-500**	2CKA000230A0437	1

F duct-jack for communication adapter

For connection of antenna cables e.g.. for TVs with integrated TV-tuner and satellite receiver.
With screw-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**0262-500**	2CKA000230A0440	1

Communication adapter for Cinch-jacks

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate. Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0263/11-500**	2CKA000230A0444	1
grey	**0263/13-500**	2CKA000230A0446	1
alpine white	**0263/12-500**	2CKA000230A0445	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked white: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
alpine white	**0263/04-500**	2CKA000230A0451	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked black: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
black	**0263/05-500**	2CKA000230A0452	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked red: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Red	**0263/06-500**	2CKA000230A0453	1

Cinch-jacks for communication adapter

For connecting analogue video devices, such as DVD players, hard disc recorders, video recorders or receivers.
Marked yellow: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
yellow	**0263/07-500**	2CKA000230A0454	1

Communication adapter for Mini-jacks 3,5mm.

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0264/11-500**	2CKA000230A0458	1
grey	**0264/13-500**	2CKA000230A0460	1
alpine white	**0264/12-500**	2CKA000230A0459	1

Busch-art linear®

Cover plate

Mini-jack 3,5 mm for communication adapter

For the connection of mobile terminal devices such as MP3 player (stereo), mobile telephone and smartphones.
Audio-band 20Hz - 20kHz.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
chrome gloss	**0264-500**	2CKA000230A0462	1

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0248/02-101**	2CKA000230A0402	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**0248/05-101**	2CKA000230A0404	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Cover plate with legend Radio



For Busch-Radio DAB+ 8215 U-101. For Busch-Radio BTconnect DAB+ 8217 U-101. For Busch-Radio iNet 8216 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**8252-44G-101**	2CKA008200A0285	10
studio white, matt [1])	**8252-44M-101**	2CKA008200A0286	10
black matt [1])	**8252-45M-101**	2CKA008200A0288	10

[1]) Surface painted.

Cover Plate Loudspeaker

Cover plate for loudspeaker insert 8223 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white - fabric	**8253-44G**	2CKA008200A0289	1
black - babric	**8253-45G**	2CKA008200A0291	1

Room thermostat, flush-mounted [1]) [2]) [3])
Change-over contact, setpoint indication, timer

END OF LIFE

With change-over contact.
Easy adjustment using menu and text-based display.
4 switching times per day can be user-defined for each day of the week.
With fixing claws.
Automatic summer/wintertime switch-over
Power reserve > 10 hours.
To fit cover plate 6435-xxx.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 U-101	2CKA001032A0508	1/10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3]) Switching temperature difference: ± 0.5 K.

Room Thermostat NEW

Electronic room thermostat, open contact, fm
Normally open contact, non-isolated
Switch contact opens when the set temperature is reached. Without fixing claws.
Separate terminal to activate eco mode to reduce the room temperature by 3K. See respective cover plates 1794 R-xx. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Power dissipation: ≤ 0,15 W
Rated current: 10 A. Temperature range (device): 5 °C - 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm. Protection class device: IP 20
Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete. Servo-valves, "de-energised open", are necessary for connection to thermostat. e.g. Article No. 6164/10-102. Switching temperature difference: ± 0.5 K

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0525	1/10
	1097 U-101-500	2CKA001032A0528	1/10
	1099 UHK-101-500	2CKA001032A0531	1/10

Busch-art linear®

Cover plate

RTC Room Temperature Controller NEW



Room Temperature Controller for Room thermostat Bluetooth with Setpoint display, Timer and Remote control Button 230 V

Colour	Type	Order code	Pack/Qty.
	1095 UTA-BT-500	2CKA001032A0534 Insert - Bluetooth	1
	1094 USITA-BT-500	2CKA001032A0536 Insert - Bluetooth	1
	1096 UTA-BT-500	2CKA001032A0538 Insert - Bluetooth	1
	1099 UHKTA-BT-500	2CKA001032A0540 Insert - Bluetooth	1
	62841 U-WL-500	2CKA006800A3115 Insert - free@home	1
	62842 U-WL-500	2CKA006800A3117 Insert - free@home	1
	62843 U-WL-500	2CKA006800A3119 Insert - free@home	1

Cover Plate TAE; UAE / TAE; USB / VGA / HDMI / loudspeaker 1 gang

For telephone connection unit. ./. For USB, VGA, HDMI inserts and communication adapter. For loudspeaker connection box. Suitable for part number 0248/0x-101. For data modules. Suitable for Art. No. 0219/12 and 0219/13. For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1766-44G-500**	2CKA001710A4166	10
studio white, matt [1])	**1766-44M-500**	2CKA001710A4167	10
black matt [1])	**1766-45M-500**	2CKA001710A4169	10

[1]) Surface painted.

Cover Plate Loudspeaker connection Turn button NEW

As a cover for volume controllers. Suitable for the >LR mono BJ FM< devices of WHD.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1740 DR/03-44G**	2CKA001710A4137	10
studio white, matt [1])	**1740 DR/03-44M**	2CKA001710A4138	10
black matt [1])	**1740 DR/03-45M**	2CKA001710A4140	10

[1]) Surface painted.

Cover plate for power adapter insert NEW

Cover plate for USB-C 65 W power adapter 6479 U-500.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**6479-44G**	2CKA006400A0457	1
studio white, matt [1])	**6479-44M**	2CKA006400A0458	1
black matt [1])	**6479-45M**	2CKA006400A0459	1

[1]) Surface painted.

Cover plate with legend for Time switch NEW

For room thermostats 1098 U-101 and 1098 UF-101. For short-time timer 6465 U-101. For Busch-CO2 sensor 1091 U-500. For blind compact timer 6422 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**6435-44G**	2CKA006430A0450	10
studio white, matt [1])	**6435-44M**	2CKA006430A0451	10
black matt [1])	**6435-45M**	2CKA006430A0453	10

[1]) Surface painted.

Cover plate with legend for Thermostat Turn button white

C-plate for room thermostats 1094 U-101, 1097 U-101; 1099 U-101.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**1794 R-44M**	2CKA001710A4206	10
white	**1794 R-44G**	2CKA001710A4207	10
black	**1794 R-45M**	2CKA001710A4208	10

Cover plate RTC NEW

As cover for ABB-free@home® room temperature controller RTC-F-1.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**6235-44G**	2CKA006220A0920	10
studio white, matt [1])	**6235-44M**	2CKA006220A0921	10
black matt [1])	**6235-45M**	2CKA006220A0923	10

[1]) Surface painted.

Busch-art linear®

Cover plate

6109/03-44G-500 Cover plate f. RTC NEW

As cover for room temperature controller with/without CO2/moisture sensor (6109/18 and 6109/28).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**6109/03-44G-500**	2CKA006155A0126	10
studio white, matt [1])	**6109/03-44M-500**	2CKA006155A0127	10
black matt [1])	**6109/03-45M-500**	2CKA006155A0129	10

[1]) Surface painted.

Insert Info light; LED / White

Size of information field 43 x 43 mm. Long service life of the lighting element (LEDs). Homogeneous backlighting of the information field.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1756 U-44G**	2CKA001753A0244	10
studio white, matt [1])	**1756 U-44M**	2CKA001753A0245	10
black matt [1])	**1756 U-45M**	2CKA001753A0247	10

[1]) Surface painted.

Cover Plate, Thermostat Various symbols for Thermostat anthracite - Platform 63 NEW

Central plate with print for room temperature controller with display/Bluetooth or free@home wireless
For room temperature controller with display:
1094 USITA-BT - 1095 UTA-BT - 1096 UTA-BT - 1099 UHKTA-BT - 62841 U-WL - 62842 U-WL - 62843 U-W

Colour	Type	Order code	Pack/Qty.
studio white, matt [1])	**1794 MDRT-44M**	2CKA006430A0425	
studio white	**1794 MDRT-44G**	2CKA006430A0426	
black matt [1])	**1794 MDRT-45M**	2CKA006430A0427	

[1]) Surface painted.

Rocker switches / push switches

Handicapped toilet signal set Busch-Infoline® Medical alarm Complete set acc. to DIN VDE 0834



For setting up an emergency call system for handicapped toilets. Consisting of: power supply insert, alarm signalling insert, signal push-button insert with pullcord and cancel-button insert. Activation of alarm signal via cord button. Optical and acoustic emergency-call signalling outside the handicapped toilet. Comforting light when alarm signal is activated. With cancel button for cancelling the emergency call Labelling field 51 x 10 mm. For installations according to DIN VDE 0834 a uninterruptible power supply is required. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1510 UC-44G-101**	2CKA001582A0441	1

Cover Plate Busch-Infoline® Signalling Single push button white

With operating knob. For signal/cancel push-button 1520/1 UK. For monitoring unit 1511 U. For Busch-Leakage guard insert 1531 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**1571 CN-44G**	2CKA001582A0445	10

Cover Plate Busch-Infoline® Signalling Touch control button Clear white

For signal push-button insert 1520/1 UKZ-101. With labelling field 51 x 10 mm. With operating knob for exchangeable inlays. Exchangeable inlays red and green for the individual designation of the operating knob are included at signal push-button insert 1520/1 UKZ-101.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**1572 CN-44G**	2CKA001582A0447	1

Cover Plate Busch-Infoline® Signalling Central cover plate white

For Alarm Control Unit insert 1515 U-12. For Busch-Alarm signal insert 1563 U-12. For indication lamp insert 1564 U-1x.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**1573 CN-44G**	2CKA001582A0443	1

Cover Plate Busch-Infoline® Signalling Central cover plate white

For signal panel insert 1566 U. With labelling field.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**1575 CN-44G**	2CKA001582A0449	10

Cover Plate Busch-Infoline® Signalling Central cover plate white

For power supply insert 1518 U. For relay insert 1539 U. For signal generator insert 1561 U-....
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**1576 CN-44G**	2CKA001582A0451	10

Busch-art linear®

Accessories

Extension of claws [1])

For the installation of flush-mounted SCHUKO® socket outlets and also switches, push-buttons, etc. and deeply installed flush-mounted boxes.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2148	2CKA002148A0120	100

[1]) Not suitable for types 2000/3 US, 2000/6/2 US, 2000/6/6 US-101 and double socket outlets.

Braille symbol

Self-adhesive (transparent) for cover 2506-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	light		
	2144 LI	2CKA001714A0295	10/1000
	bell		
	2144 KI	2CKA001714A0296	10/1000
	key		
	2144 TR	2CKA001714A0297	10/1000

Braille symbol socket outlet

Self-adhesive, transparent for SCHUKO® socket outlets with hinged lid 20 EUK-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2144 ST	2CKA001714A0298	10/1000

RC suppressor

For protection against the damage or destruction of electronic devices due to overvoltages.
For wiring network-interconnected inductivities (e.g.. relay, protection, fluorescent lamps, transformers, etc.).
Eliminates functional disturbances on electronic devices, e.g. automatic circuit reclosure (clocking) of a movement detector.
Dimensions: diameter 25 mm, length 35 mm, length of the connecting cable approx. 100 mm.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz

Colour	Type	Order code	Pack/Qty.
	6899	2CKA006899A0231	10

Cover frame

Cover Frame 1gang NEW

For vertical or horizontal installation.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1721-44G-500**	2CKA001754A4841	10
studio white, matt [1])	**1721-44M-500**	2CKA001754A4842	10
black matt [1])	**1721-45M-500**	2CKA001754A4844	10
studio white matt / copper	**1721-441M-500**	2CKA001754A4905	10
black matt / gold	**1721-453M-500**	2CKA001754A4906	10
black matt / chrome	**1721-456M-500**	2CKA001754A4907	10
aluminium black	**1721-4071**	2CLA897100A1658	1
aluminium silver	**1721-4073**	2CLA897100A1758	1
glass black	**1721-4025**	2CKA001754A4877	1
glass black/ gold	**1721-4013**	2CKA001754A4882	1
glass blue	**1721-4028**	2CLA897100A3958	1
paper black	**1721-4045**	2CKA001754A4897	1
slate terra rosso	**1721-4097**	2CLA897100A2958	1
wood oak	**1721-4083**	2CKA001754A4887	1
wood walnut	**1721-4086**	2CKA001754A4892	1

[1]) Surface painted.

Busch-art linear®

Cover frame

Cover Frame 2gang NEW

For vertical or horizontal installation.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1722-44G-500**	2CKA001754A4849	10
studio white, matt [1])	**1722-44M-500**	2CKA001754A4850	10
black matt [1])	**1722-45M-500**	2CKA001754A4852	10
studio white matt / copper	**1722-441M-500**	2CKA001754A4911	10
black matt / gold	**1722-453M-500**	2CKA001754A4912	10
black matt / chrome	**1722-456M-500**	2CKA001754A4913	10
aluminium black	**1722-4071**	2CLA897200A1658	1
aluminium silver	**1722-4073**	2CLA897200A1758	1
glass black	**1722-4025**	2CKA001754A4878	1
glass black/ gold	**1722-4013**	2CKA001754A4883	1
glass blue	**1722-4028**	2CLA897200A3958	1
paper black	**1722-4045**	2CKA001754A4898	1
slate terra rosso	**1722-4097**	2CLA897200A2958	1
wood oak	**1722-4083**	2CKA001754A4888	1
wood walnut	**1722-4086**	2CKA001754A4893	1

[1]) Surface painted.

Cover Frame 3gang NEW

For vertical or horizontal installation.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1723-44G-500**	2CKA001754A4857	10
studio white, matt [1])	**1723-44M-500**	2CKA001754A4858	10
black matt [1])	**1723-45M-500**	2CKA001754A4860	10
studio white matt / copper	**1723-441M-500**	2CKA001754A4917	10
black matt / gold	**1723-453M-500**	2CKA001754A4918	10
black matt / chrome	**1723-456M-500**	2CKA001754A4919	10
aluminium black	**1723-4071**	2CLA897300A1658	1
aluminium silver	**1723-4073**	2CLA897300A1758	1
glass black	**1723-4025**	2CKA001754A4879	1
glass black/ gold	**1723-4013**	2CKA001754A4884	1
glass blue	**1723-4028**	2CLA897300A3958	1
paper black	**1723-4045**	2CKA001754A4899	1
slate terra rosso	**1723-4097**	2CLA897300A2958	1
wood oak	**1723-4083**	2CKA001754A4889	1
wood walnut	**1723-4086**	2CKA001754A4894	1

[1]) Surface painted.

Busch-art linear®

Cover frame

Cover Frame 4gang NEW

For vertical or horizontal installation.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1724-44G-500**	2CKA001754A4865	1
studio white, matt [1])	**1724-44M-500**	2CKA001754A4866	1
black matt [1])	**1724-45M-500**	2CKA001754A4868	1
studio white matt / copper	**1724-441M-500**	2CKA001754A4923	1
black matt / gold	**1724-453M-500**	2CKA001754A4924	1
black matt / chrome	**1724-456M-500**	2CKA001754A4925	1
aluminium black	**1724-4071**	2CLA897400A1658	1
aluminium silver	**1724-4073**	2CLA897400A1758	1
glass black	**1724-4025**	2CKA001754A4880	1
glass black/ gold	**1724-4013**	2CKA001754A4885	1
glass blue	**1724-4028**	2CLA897400A3958	1
paper black	**1724-4045**	2CKA001754A4900	1
slate terra rosso	**1724-4097**	2CLA897400A2958	1
wood oak	**1724-4083**	2CKA001754A4890	1
wood walnut	**1724-4086**	2CKA001754A4895	1

[1]) Surface painted.

Cover Frame 5gang NEW

For vertical or horizontal installation.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1725-44G-500**	2CKA001754A4873	1
studio white, matt [1])	**1725-44M-500**	2CKA001754A4874	1
black matt [1])	**1725-45M-500**	2CKA001754A4876	1
studio white matt / copper	**1725-441M-500**	2CKA001754A4929	1
black matt / gold	**1725-453M-500**	2CKA001754A4930	1
black matt / chrome	**1725-456M-500**	2CKA001754A4931	1
aluminium black	**1725-4071**	2CLA897500A1658	1
aluminium silver	**1725-4073**	2CLA897500A1758	1
glass black	**1725-4025**	2CKA001754A4881	1
glass black/ gold	**1725-4013**	2CKA001754A4886	1
glass blue	**1725-4028**	2CLA897500A3958	1
paper black	**1725-4045**	2CKA001754A4901	1
slate terra rosso	**1725-4097**	2CLA897500A2958	1
wood oak	**1725-4083**	2CKA001754A4891	1
wood walnut	**1725-4086**	2CKA001754A4896	1

[1]) Surface painted.

Notes

carat®
Everyday indulgence.

Extraordinary and distinct design, of the highest quality. Each piece becomes a unique object of any interior. It attracts attention and that is the point. Solid frames made from bronze, polished steel or glossy glass, show immediately their real value and an exquisite owner's taste. The aesthetics, together with innovative functions make every day luxurious.

01 black matt / porcelain anthracite
02 ivory white / bronze
03 studio white / glass black
04 anthracite / stainless steel
05 studio white / chrome
06 ivory white / gold
07 studio white / white glass

Materials
UV-resistant, free of PVC and halogen.
Frame: genuine materials.

carat®

Selected functions.

01

02 

03

04

05 

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20

21

01 Rocker switch 1gang
02 Rocker switch 2gang
03 Busch Universal Rotary Dimmer
04 Touch dimmer
05 Busch-Comfort switch
06 Busch-steplight®
07 Busch-Protector® SCHUKO® socket outlet with overvoltage protection
08 SCHUKO® USB socket outlet, USB A&C
09 Socket outlet with earthing pin
10 Switched socket outlet BS standard
11 Blind switch with rotary knob
12 Busch-Blind control switch with semi-cylindrical lock
13 Busch-Blind
14 Comfort timer
15 Room thermostat with display
16 Busch-Infoline® alarm insert
17 Busch-Radio DAB+
18 Antenna socket for radio/TV/satellite
19 Universal data connection box
20 Stereo loudspeaker connecting box
21 KNX sensor, for more KNX products see part 12 of the catalogue - Intelligent Building Solutions

01

02

03

04

05

1 to 4gang cover frame for horizontal and vertical installation.
01 Side view, 11 mm x 107 mm
02 107 mm x 107 mm
03 107 mm x 178 mm
04 107 mm x 249 mm
05 107 mm x 320 mm

For more information about light switch ranges visit ABB global web sites.

carat®

Rocker switches / push switches

Rocker Switch Mechanism [1]



Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way		
	2000/6 US-500	2CKA001012A2198	10/100
	2gang 1way		
	2000/5 US-500	2CKA001012A1150	10/100
	DP, 1gang 2way [2]		
	2000/6/2 US	2CKA001012A0954	10
	1gang		
	2000/7 US-500	2CKA001012A2199	10/100
	DP, 1gang 1way		
	2000/2 US-500	2CKA001012A2196	10/100
	SP, 1gang 1way switch		
	2000/1 US-500	2CKA001012A2059	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1]

Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	Switch-off and two-way circuit 16 A [2]		
	2400/6 US-500	2CKA001012A2232	10/100
	2gang switch 16 A		
	2400/5 US-500	2CKA001012A2234	10
	1gang intermediate 16 A		
	2400/7 US-500	2CKA001012A2236	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]
2gang 2way

With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/6/6US-101-500	2CKA001011A0928	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]
Changeover/changeover circuit 16 A

With screwless terminals.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6/6US-101-500	2CKA001022A0663	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1] [2]
DP, 1gang 1way



For switching high loads.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/2 US-101-500	2CKA001012A2193	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Also for switching SCHUKO® socket outlets.

Rocker Switch Mechanism [1] [2]
3-pole, 1gang 1way switch

Rated voltage: 400 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/3 US	2CKA001011A0816	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1]

With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way [2]		
	2000/6 USGL-500	2CKA001012A2194	10/100
	2gang 1way		
	2000/5 USGL	2CKA001012A1135	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.

carat®

Rocker switches / push switches

Rocker Switch Mechanism, control [1]
2gang switch with N-clamp 16 A

With LED.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/5 USK-500	2CKA001012A2238	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism, control [1] [2] [3]

With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way with N-terminal		
	2000/6 USK-500	2CKA001022A0659	10/100
	DP, 1gang 1way		
	2000/2 UK	2CKA001022A0656	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Rocker Switch Mechanism, control [1] [2] [3]
Switch-off and two-way circuit with N-clamp 16 A

With neon lamp.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6 USK-500	2CKA001022A0661	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-500	2CKA001413A0574	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With 2 independent signalling contacts.
Rated voltage: 250 V~
Inputs: 1
Outputs: 1
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-201	2CKA001413A0483	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1] [2] [3]
SP, with normally open contact (operating current)

With illumination.
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 USGL-500	2CKA001413A1106	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.
[3] For relay and touch dimmer applications.

Push-switch mechanism [1]

With one input terminal and 2 actuating covers.
Rated voltage: 250 V~
Inputs: 1
Outputs: 2x Normally open contact
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-205-500	2CKA001413A1105	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1]
SP, 1gang 2way



Can be wired for normally open contacts (stand-by current) or normally closed contacts (operating current).
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-206-500	2CKA001413A1104	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

carat®

Rocker switches / push switches

Rocker

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1786-81-500**	2CKA001751A3079	10/100
ivory white	**1786-82-500**	2CKA001751A3083	10/100
studio white	**1786-84-500**	2CKA001751A3074	10/100
studio white, matt [1])	**1786-884-500**	2CKA001751A3089	10/100
black matt [1])	**1786-885-500**	2CKA001751A3094	10/100

[1]) Surface painted.

Rocker with small red spherical cap

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789-81**	2CKA001751A2928	10
ivory white	**1789-82**	2CKA001751A2813	10
studio white	**1789-84-500**	2CKA001751A3091	10/100
studio white, matt [1])	**1789-884**	2CKA001751A3033	10
black matt [1])	**1789-885**	2CKA001751A3047	10

[1]) Surface painted.

Rocker

For flush-mounted switch 2g 1w, 2g push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785-81**	2CKA001751A2930	10
ivory white	**1785-82**	2CKA001751A2744	10/100
studio white	**1785-84-500**	2CKA001751A3076	10/100
studio white, matt [1])	**1785-884**	2CKA001751A3024	10/100
black matt [1])	**1785-885**	2CKA001751A3038	10/100

[1]) Surface painted.

Rocker with small transparent lens

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 N-81**	2CKA001751A3147	10/100
ivory white	**1789 N-82**	2CKA001751A3148	10/100
studio white	**1789 N-84-500**	2CKA001751A3151	10/100
studio white, matt [1])	**1789 N-884**	2CKA001751A3153	10/100
black matt [1])	**1789 N-885**	2CKA001751A3154	10/100

[1]) Surface painted.

Rocker

As a cover for flush-mounted control 2gang switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785 K-81-500**	2CKA001751A3122	10
ivory white	**1785 K-82-500**	2CKA001751A3124	10
studio white	**1785 K-84-500**	2CKA001751A3128	10
studio white, matt [1])	**1785 K-884-500**	2CKA001751A3135	10
black matt [1])	**1785 K-885-500**	2CKA001751A3137	10

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Plug< icon.
As cover for flush-mounted switch 1g1w DP and 3pole with neon lens and marking "I O"
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 ST-81**	2CKA001751A3157	10/100
ivory white	**1789 ST-82**	2CKA001751A3158	10/100
studio white	**1789 ST-84-500**	2CKA001751A3161	10/100
studio white, matt [1])	**1789 ST-884**	2CKA001751A3163	10/100
black matt [1])	**1789 ST-885**	2CKA001751A3164	10/100

[1]) Surface painted.

carat®

Rocker switches / push switches

Switch rocker with marking

With >Light< icon.
For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2520 LI-81**	2CKA001751A3186	10/100
ivory white	**2520 LI-82**	2CKA001751A3187	10/100
studio white	**2520 LI-84-500**	2CKA001751A3190	10/100
studio white, matt [1])	**2520 LI-884**	2CKA001751A3192	10/100
black matt [1])	**2520 LI-885**	2CKA001751A3193	10/100

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Light< icon.
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 LI-81**	2CKA001751A2931	10
ivory white	**1789 LI-82**	2CKA001751A2745	10
studio white	**1789 LI-84-500**	2CKA001751A3084	10/100
black matt [1])	**1789 LI-885**	2CKA001751A3045	10
studio white, matt [1])	**1789 LI-884**	2CKA001751A3031	10

[1]) Surface painted.

Switch rocker with marking

With >Key< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2520 TR-81**	2CKA001751A3196	10/100
ivory white	**2520 TR-82**	2CKA001751A3197	10/100
studio white	**2520 TR-84**	2CKA001751A3199	10/100
studio white, matt [1])	**2520 TR-884**	2CKA001751A3201	10/100
black matt [1])	**2520 TR-885**	2CKA001751A3202	10/100

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Key< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 TR-81**	2CKA001751A2933	10
ivory white	**1789 TR-82**	2CKA001751A2747	10
studio white	**1789 TR-84**	2CKA001751A2755	10
studio white, matt [1])	**1789 TR-884**	2CKA001751A3032	10
black matt [1])	**1789 TR-885**	2CKA001751A3046	10

[1]) Surface painted.

Switch rocker with marking

With >Bell< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2520 KI-81**	2CKA001751A3176	10/100
ivory white	**2520 KI-82**	2CKA001751A3177	10/100
studio white	**2520 KI-84-500**	2CKA001751A3180	10/100
studio white, matt [1])	**2520 KI-884**	2CKA001751A3182	10/100
black matt [1])	**2520 KI-885**	2CKA001751A3183	10/100

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Bell< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 KI-81**	2CKA001751A2932	10
ivory white	**1789 KI-82**	2CKA001751A2746	10
studio white	**1789 KI-84**	2CKA001751A2754	10
studio white, matt [1])	**1789 KI-884**	2CKA001751A3030	10
black matt [1])	**1789 KI-885**	2CKA001751A3044	10

[1]) Surface painted.

carat®

Rocker switches / push switches

Rocker [1] [2] with labelling field

With >Bell< icon.
With pilot lamp for uniform illumination of the labelling field.
For flush-mounted push switch.
Size of labelling field: 59.7 x 11.7 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1764 NLI/KI-81**	2CKA001731A3998	10/100
ivory white	**1764 NLI/KI-82**	2CKA001731A3999	10/100
studio white	**1764 NLI/KI-84-500**	2CKA001731A4002	10/100
studio white, matt [3]	**1764 NLI/KI-884**	2CKA001731A4004	10/100
black matt [3]	**1764 NLI/KI-885**	2CKA001731A4005	10/100

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Illumination using neon lamp 8353 or incandescent lamp 8344-1 and LED inserts.
[3] Surface painted.

Rocker [1] [2] with labelling field

With pilot lamp for uniform illumination of the labelling field.
For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Size of labelling field: 59.7 x 11.7 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1764 NLI-81**	2CKA001731A1552	10
ivory white	**1764 NLI-82**	2CKA001731A1876	10
studio white	**1764 NLI-84**	2CKA001731A1877	10/100
studio white, matt [3]	**1764 NLI-884**	2CKA001731A1985	10
black matt [3]	**1764 NLI-885**	2CKA001731A1982	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Illumination using neon lamp 8353 or incandescent lamp 8344-1 and LED inserts.
[3] Surface painted.

Switch rocker with marking with small red spherical cap

With imprint >0< and >I<.
As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1788-81**	2CKA001751A2927	10
ivory white	**1788-82**	2CKA001751A2742	10
studio white	**1788-84**	2CKA001751A2750	10/100
studio white, matt [1]	**1788-884**	2CKA001751A3028	10
black matt [1]	**1788-885**	2CKA001751A3042	10

[1] Surface painted.

Switch rocker with marking with small red spherical cap

With >Heating< imprint.
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 H-81**	2CKA001751A2929	10
ivory white	**1789 H-82**	2CKA001751A2743	10
studio white	**1789 H-84**	2CKA001751A2751	10
studio white, matt [1]	**1789 H-884**	2CKA001751A3029	10
black matt [1]	**1789 H-885**	2CKA001751A3043	10

[1] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker el. push-switch

Colour	Type	Order code	Pack/Qty.
anthracite	**2570-10-81**	2CKA001751A3261	10
ivory white	**2570-10-82**	2CKA001751A3263	10
studio white	**2570-10-84**	2CKA001751A3258	10
studio white, matt [1]	**2570-10-884**	2CKA001751A3260	10
black matt [1]	**2570-10-885**	2CKA001751A3262	10

[1] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker 2g el. push-switch

Colour	Type	Order code	Pack/Qty.
anthracite	**2570-20-81**	2CKA001751A3272	10
ivory white	**2570-20-82**	2CKA001751A3274	10
studio white	**2570-20-84**	2CKA001751A3269	10
studio white, matt [1]	**2570-20-884**	2CKA001751A3271	10
black matt [1]	**2570-20-885**	2CKA001751A3273	10

[1] Surface painted.

carat®

Rocker switches / push switches

CoverPlates (partly incl. Insert) Hotel application

Rocker 2g el. push-switch

Colour	Type	Order code	Pack/Qty.
anthracite	**2570-30-81**	2CKA001751A3283	10
ivory white	**2570-30-82**	2CKA001751A3285	10
studio white	**2570-30-84**	2CKA001751A3280	10
studio white, matt [1])	**2570-30-884**	2CKA001751A3282	10
black matt [1])	**2570-30-885**	2CKA001751A3284	10

[1]) Surface painted.

Flush Mounted Inserts Flush-mounted installation boxes and inserts

El. push-switch insert

Colour	Type	Order code	Pack/Qty.
	2051 U	2CKA001413A1115	10

Flush Mounted Inserts Black

El. push-switch insert 2g

Colour	Type	Order code	Pack/Qty.
	2052 U	2CKA001413A1116	10

Flush Mounted Inserts Black

El. push-switch insert 2g

Colour	Type	Order code	Pack/Qty.
	2053 U	2CKA001413A1117	10

CoverPlates (partly incl. Insert) future®, Busch-axcent®, carat®; Busch-dynasty®

For card switch. For insert 2025 U. Suitable for cards sized 54 x 86 mm. The inner part of the cover plate is made of light-conducting plastic, so that the card slot is illuminated.

Colour	Type	Order code	Pack/Qty.
anthracite	1792-81	2CKA001710A3639	10
ivory white	1792-82	2CKA001710A3640	10
studio white	1792-84	2CKA001710A3641	10
studio white, matt [1])	1792-884	2CKA001710A3928	10
black matt [1])	1792-885	2CKA001710A3905	10

[1]) Surface painted.

Flush Mounted Inserts Flush-mounted installation boxes and inserts

EIlluminable. With N terminal.

Colour	Type	Order code	Pack/Qty.
	2025 U	2CKA001012A1713	10

CoverPlates (partly incl. Insert) Hotel application

C-plate, card switch RFID

Colour	Type	Order code	Pack/Qty.
anthracite	**1792 RFID-81**	2CKA001710A4130	10
ivory white	**1792 RFID-82**	2CKA001710A4132	10
studio white	**1792 RFID-84**	2CKA001710A4127	10
studio white, matt [1])	**1792 RFID-884**	2CKA001710A4129	10
black matt [1])	**1792 RFID-885**	2CKA001710A4131	10

[1]) Surface painted.

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

Card switch insert RFID.

Colour	Type	Order code	Pack/Qty.
	2025 RFID U	2CKA001012A2242	10

carat®

Rocker switches / push switches

Card switch 10 A [1]) SP, with normally open contact (operating current)



Illuminable. With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2025 U	2CKA001012A1713	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
delivery form:	Adapter plate APBS to be ordered separate.		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Switch rocker with marking

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
DO NOT DISTURB
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1786/11-81**	2CKA001751A3207	10
ivory white	**1786/11-82**	2CKA001751A2997	10
studio white	**1786/11-84**	2CKA001751A2998	10
studio white, matt [1])	**1786/11-884**	2CKA001751A3026	10
black matt [1])	**1786/11-885**	2CKA001751A3040	10

[1]) Surface painted.

Switch rocker with marking

For flush-mounted switch 2g 1w, 2g push switch.
DO NOT DISTURB - MAKE UP ROOM
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785/11-81**	2CKA001751A3205	10
ivory white	**1785/11-82**	2CKA001751A2991	10
studio white	**1785/11-84**	2CKA001751A2992	10
studio white, matt [1])	**1785/11-884**	2CKA001751A3023	10
black matt [1])	**1785/11-885**	2CKA001751A3037	10

[1]) Surface painted.

Switch rocker with marking

As cover for flush-mounted rocker control switch insert, DND/MUR.
DO NOT DISTURB - MAKE UP ROOM
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785/11 K-81**	2CKA001751A3212	10
ivory white	**1785/11 K-82**	2CKA001751A3214	10
studio white	**1785/11 K-84**	2CKA001751A3209	10
studio white, matt [1])	**1785/11 K-884**	2CKA001751A3211	10
black matt [1])	**1785/11 K-885**	2CKA001751A3213	10

[1]) Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker DND/MUR electronic

Colour	Type	Order code	Pack/Qty.
studio white	**2058-24-81**	2CKA001751A3223	10
studio white, matt [1])	**2058-24-82**	2CKA001751A3225	10
anthracite	**2058-24-84**	2CKA001751A3220	10
black matt [1])	**2058-24-884**	2CKA001751A3222	10
ivory white	**2058-24-885**	2CKA001751A3224	10

[1]) Surface painted.

Rocker switch insert DND/MUR [1])



With LED.
Rated voltage: 250 V~
Rated current: 10 AX - Suitable for: LEDi / CFLi
Rated power: 100 W - Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028 UK	2CKA001012A2240	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker switch insert DND/MUR [1])



With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028/12 UK	2CKA001012A2241	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

carat®

Rocker switches / push switches

Flush Mounted Inserts [1]

El. push-switch DND/MUR

Colour	Type	Order code	Pack/Qty.
	2058 UK	2CKA001413A1114	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Bell push-switch DND/MUR 230 V [1]

with LED.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20 - IEC 60669-1

Colour	Type	Order code	Pack/Qty.
anthracite	**2029 UC-81**	2CKA001751A3167	1
ivory	**2029 UC-82**	2CKA001751A3168	1
studio white	**2029 UC-84**	2CKA001751A3170	1
studio white, matt [2]	**2029 UC-884**	2CKA001751A3172	1
black matt [2]	**2029 UC-885**	2CKA001751A3173	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Surface painted.

Bell push-switch DND/MUR 24 V [1]

With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
anthracite	**2029/12 UC-81**		1
ivory	**2029/12 UC-82**	2CKA001751A3236	1
studio white	**2029/12 UC-84**	2CKA001751A3231	1
studio white, matt [2]	**2029/12 UC-884**	2CKA001751A3233	1
black matt [2]	**2029/12 UC-885**	2CKA001751A3235	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Bell push-switch DND/MUR

Colour	Type	Order code	Pack/Qty.
studio white	**2059 UC-81**	2CKA001751A3243	1
studio white, matt [1]	**2059 UC-82**	2CKA001751A3245	1
anthracite	**2059 UC-84**	2CKA001751A3240	1
black matt [1]	**2059 UC-884**	2CKA001751A3242	1
ivory	**2059 UC-885**	2CKA001751A3244	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Pull switch [1] SP, with normally open contact (operating current)

With 2-metre pull cord, red handle, and red neon indicator.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	2020/01 US-101	2CKA001413A1112	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Pull switch [1] SP, break contact

With 2-metre pull cord, red handle, and red neon indicator.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	2020/10 US-101	2CKA001413A1111	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker open for red pull switch neon indicator

For pull switch 2020/xx US.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1720-81**	2CKA001731A1914	10
ivory white	**1720-82**	2CKA001731A1915	10
studio white	**1720-84**	2CKA001731A1916	10
studio white, matt [1]	**1720-884**	2CKA001731A1979	10
black matt [1]	**1720-885**	2CKA001731A1981	10

[1] Surface painted.

carat®

Rocker switches / push switches

Three-step rotary switch [1] [2] SP, with zero position

With zero position.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710 U	2CKA001101A0918	1/10

[1] Install only in conjunction with wall boxes ø 60 mm.
[2] Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Three-step rotary switch [1] [2] SP, without zero position

Without zero position.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710/1 U	2CKA001101A0919	1/10

[1] Install only in conjunction with wall boxes ø 60 mm.
[2] Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Cover plate with rotary control, with marking

As cover for flush mounted three-step rotary switch.
With zero position.
For insert 2710 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2542 DR/01-81**	2CKA001710A3644	10
ivory white	**2542 DR/01-82**	2CKA001710A3645	10
studio white	**2542 DR/01-84**	2CKA001710A3646	10
studio white, matt [1]	**2542 DR/01-884**	2CKA001710A3890	10
black matt [1]	**2542 DR/01-885**	2CKA001710A3913	10

[1] Surface painted.

Cover plate with rotary control, with marking

As cover for flush mounted three-step rotary switch.
Without zero position.
For insert 2710/1 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2542 DR/02-81**	2CKA001710A3649	10
ivory white	**2542 DR/02-82**	2CKA001710A3650	10
studio white	**2542 DR/02-84**	2CKA001710A3651	10
studio white, matt [1]	**2542 DR/02-884**	2CKA001710A3891	10
black matt [1]	**2542 DR/02-885**	2CKA001710A3914	10

[1] Surface painted.

Cover plate [1] for pull switch 2610/6 UC-xx, 2610/6 UJ-xx

With screw-type terminal
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1796-81**	2CKA001753A0308	10
ivory white	**1796-82**	2CKA001753A0309	10
studio white	**1796-84**	2CKA001753A0311	10
studio white, matt [2]	**1796-884**	2CKA001753A0313	10
black matt [2]	**1796-885**	2CKA001753A0314	10

[1] Exchanging the available cover/cover plate.
[2] Surface painted.

Friends of Hue smart switch complete set. Wall transmitter, 2/4 channels.

Consitsting of Friends of Hue smart switch insert 6716 U-500. Comprising 2gang rocker 6736 FoH-8xx for Friends of Hue smart switch. Consisting of 1gang future® linear cover frames. Comprising fixing plate and intermediate ring. Smarter light switches for wireless remote control of Philips Hue lamps For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology. Combinable with the Busch-Jaeger switch ranges: carat®,carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
studio white	**6716 UJ-84-500**	2CKA006710A0011	1
black matt [1]	**6716 UJ-885-500**	2CKA006710A0018	1

[1] Surface painted.

Friends of Hue smart switch insert. Wall-mounted transmitter, 2 / 4 channel.

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx. Smarter light switches for wireless remote control of Philips Hue lamps. For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology. Combinable with the Busch-Jaeger switch ranges: carat®,carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
	6716 U-500	2CKA006710A0014	1

carat®

Rocker switches / push switches

Bluetooth Low Energy (BLE) smart switch complete set. Wall transmitter, 2/4 channels.

Consisting of BLE smart switch insert 6716 UBT, 2gang rocker 6736 FoH-8xx for smart switches, 1gang future® linear cover frame, fixing plate and intermediate ring.
Smarter light switch for wireless remote control of BLE radio devices. Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
studio white	**6716/01 UJ-84-500**	2CKA006730A0156	1
black matt [1])	**6716/01 UJ-885-500**	2CKA006730A0157	1

[1]) Surface painted.

Bluetooth Low Energy (BLE) smart switch semi complete set. Wall transmitter, 2/4 channels.

Consisting of BLE smart switch insert 6716 UBT, 2gang rocker 6736 FoH-8xx for smart switches, fixing plate and intermediate ring.
Smarter light switch for wireless remote control of BLE radio devices.
Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, future® linear and Impressivo.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
studio white	**6716/01 UJ-84-510**	2CKA006730A0158	1
black matt [1])	**6716/01 UJ-885-510**	2CKA006730A0159	1

[1]) Surface painted.

Bluetooth Low Energy (BLE) smart switch insert. Wall transmitter, 2 / 4 channel.

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx.
- Smart switch for wireless remote control of radio components.
- Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Depending on the ecosystem, the wireless range is automatically extended via mains-powered BT mesh devices (repeater function).
- Encrypted transmission with AES-128 (CBC mode) and sequence counter.
- Contains NFC configuration interface according to NFC Forum Type 2 Tag (ISO/IEC 14443 Part 2 + 3).
- Therefore particularly simple commissioning of BLE radio components from Casambi.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
BT smart switch insert (SF)	**6716 UBT**	2CKA006710A0015	1

Smart Switch, WL NEW

Smarter light-/blind switch for wireless control of Busch-flexTronics® wireless and Busch-free@home® devices. Wall-mounted transmitter, 2/4 channels.
Operation in ABB-flexTronics® wireless with up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required.
Programming with the ABB-free@home® Next App. Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.
Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.

Colour	Type	Order code	Pack/Qty.
	62721 U-WL-500	2CKA006710A0048	1

carat®

Rocker switches / push switches

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
anthracite	**6735 BT-81**	2CKA006730A0142	1
ivory white	**6735 BT-82**	2CKA006730A0143	1
studio white	**6735 BT-84**	2CKA006730A0145	1
studio white, matt [1])	**6735 BT-884**	2CKA006730A0149	1
black matt [1])	**6735 BT-885**	2CKA006730A0150	1

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
anthracite	**6736 FoH-81**	2CKA006730A0133	1
ivory white	**6736 FoH-82**	2CKA006730A0134	1
studio white	**6736 FoH-84**	2CKA006730A0136	1
studio white, matt [1])	**6736 FoH-884**	2CKA006730A0140	1
black matt [1])	**6736 FoH-885**	2CKA006730A0141	1

[1]) Surface painted.

Rocker
1gang, with "Blind" icon NEW

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Colour	Type	Order code	Pack/Qty.
81 anthracite	**6735-11-81**	2CKA006220A0985	
82 ivory white	**6735-11-82**	2CKA006220A0986	
84 studio white	**6735-11-84**	2CKA006220A0988	
884 studio white, matt [1])	**6735-11-884**	2CKA006220A0991	
885 black matt	**6735-11-885**	2CKA006220A0992	

[1]) Surface painted.

Dimmers

Busch-rotary dimmer [1]) [2]) [3]) [4]) [5]) [6]) [7]) [8]) [9])
Flush-mounted, LED, 2-100 W

With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
Via mode switch adjustable between leading edge control and trailing edge control.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With adjustable minimum brightness.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10%
Rated frequency: 50 Hz/60 Hz
Nominal power: 2 - 100 W/VA (retrofit LED loads).
Nominal power: 10 - 250 W/VA (non-LED loads).
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6523 U-102-500	2CKA006512A0335	1/10

[1]) Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2]) In the case of conventional transformers, take ~20% transformer loss into account.
[3]) In case of electronic transformers, 5 % transformer losses.
[4]) Also applicable for 1gang 2way installations.
[5]) Provided with terminal for net disconnection devices.
[6]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7]) Recommendation: Please use loads and types of one producer.
[8]) The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9]) A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

carat®
Dimmers

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
UP, LED, 2-400 W

Very small installation depth: < 20 mm.
With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without cover plate. Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz Nominal power: 2 - 100 W/VA (leading edge control) Nominal power: 2 - 400 W/VA (trailing edge control)



Colour	Type	Order code	Pack/Qty.
	6523 UR-104-500	2CKA006512A0354	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] [2] [3] [4] flush mounted, 1-10V

With rotary control.
For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control gears
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 700 W/VA
IEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	2112 U-101-500	2CKA006599A2873	1/10

[1] Non-illuminable.
[2] Use cover plates 2115 J-.../2115-.../6540-... .
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Making-current limiters have to be provided in case of too high making currents.

Busch-rotary dimmer [1]
Flush-mounted, DALI, tunable white

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE article no. 2116/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116 U	2CKA006599A3025	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

carat®
Dimmers

Busch-rotary dimmer [1]) Flush-mounted, DALI, with internal power supply, tunable white

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116/11 U	2CKA006599A3026	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1]) flush mounted, DALI

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
An additional DALI power supply is needed, e.g. by Tridonic, Philips, Helvar or 2117/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117 U-500	2CKA006599A2987	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

carat®
Dimmers

Busch-rotary dimmer [1])
flush mounted, DALI, with internal power supply

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117/11 U-500	2CKA006599A2988	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate [1]) with rotary knob, with indication lamp

Elevated knob.
With transparent luminous ring.
For Busch-Dimmer®.
For inserts
2112 U-101/2247 U/2250 U/6513 U-102/6517 U-10x/ 6519 U/6520 U/6523 U(R)(10x) /6591 U-10x and 6592 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6540-81-102**	2CKA006599A2950	10
ivory white	**6540-82-102**	2CKA006599A2951	10/100
studio white	**6540-84-102-500**	2CKA006599A3009	10/100
studio white, matt [2])	**6540-884-102**	2CKA006599A2961	10/100
black matt [2])	**6540-885-102**	2CKA006599A2966	10/100

[1]) Replacement neon lamp, Art. No. 3855.
[2]) Surface painted.

LED dimmer insert flex, 1gang [1]) [2]) [3]) [4]) [5]) [6])
FM, LED, 3-240 VA

2-wire connection (neutral conductor not required). Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA). Touch dimmer for switching lighting systems. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi). For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers. For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps. Mix operaton of LEDi with conventional loads possible. With manually adjustable operating mode: trailing / leading edge control. With adjustable minimum brightness. With light-level memory and minimum brightness memory. Low-noise level by MOSFET transistors. With electronic short-circuit protection. With electronic overload protection. Without control cover. For control element flex, 1gang, 64711. For control element flex, 2gang, 64721. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Rated power: 3-240 VA (LEDi). Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 1. Outputs: 1x dimming channel. Suitable for: 230 V LEDi, typical (leading edge control). Rated power: 3 - 100 VA. Suitable for: 230 V LEDi, typical (trailing edge control). Rated power: 3 - 240 W. Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer. Rated power: 10 - 240 VA.Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1]) In the case of conventional transformers, take ~20% transformer loss into account.
[2]) In case of electronic transformers, 5 % transformer losses.
[3]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4]) Recommendation: Please use loads and types of one producer.
[5]) The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6]) A liability on the part of Buscah-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

carat®
Dimmers

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6]
FM, LED, 3-240 VA

Control element, 1 gang flex
Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Flex control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 2 gang, flex wireless

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Rocker 1gang, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRD-1-81	2CKA006220A0149	1
ivory white	SRD-1-82	2CKA006220A0520	1
studio white	SRD-1-84	2CKA006220A0151	1
studiowhite matt	SRD-1-884	2CKA006220A0605	1

Rocker 2gang left, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRD-2-L-81	2CKA006220A0164	1
ivory white	SRD-2-L-82	2CKA006220A0525	1
studio white	SRD-2-L-84	2CKA006220A0166	1
studiowhite matt	SRD-2-L-884	2CKA006220A0610	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRS-2-R-81	2CKA006220A0173	1
ivory white	SRS-2-R-82	2CKA006220A0528	1
studio white	SRS-2-R-84	2CKA006220A0175	1
studiowhite matt	SRS-2-R-884	2CKA006220A0613	1

carat®

ABB flexTronics inserts

Relay insert flex, 1gang [1]

3 wire connection (neutral conductor required).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical. Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 2300 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Relay insert flex, 2gang [1]

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... . For Busch-Watchdog 180 flex sensors 6476x-...
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

e-contact insert flex, 1gang [1] [2]

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1] Use only dimmable high-voltage LEDs.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

carat®

ABB flexTronics inserts

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6]
FM, LED, 3-240 VA

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi)
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x dimming channel
Suitable for: 230 V LEDi, typical (leading edge control)
Rated power: 3 - 100 VA
Suitable for:230 V LEDi, typical (trailing edge control)
Rated power: 3 - 240 W
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

ABB flexTronics comfort switch sensor

Extension insert flex [1]

3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Control/Signal outputs: 1, electronic output, potential-bound. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Comfort switch flex sensor [1] [2]

Movement detector push-button switch combination. For switching lighting systems that depend on brightness and movement. With select lens, prevents detection of smaller animal. Push switch function possible at all times. With notice LED when manual operation is necessary. Extension of the detection range by main unit/extension unit combination. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off.
Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off. Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off. With continuous light/continuous Off function. Adjusting elements on rear side. Surveillance density: 9 sectors with 28 switching segments. Switch off delay: 1 to 10 min., adjustable. Compatible with all ABB flexTronics inserts. For relay insert flex, 1gang, 64811 U-500. For relay insert flex, 2gang, 64821 U-500. For e-contact insert flex, 1gang, 64814 U-500. For LED touch dimmer insert flex, 1gang, 64851 U-500. For extension insert flex, 64891 U-500.
Display elements: LED for status display.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 5 m, lateral: 3 m, at mounting height: 1.1 m. Detection angle: 170°.
Brightness limit value: 5 Lux - daytime operation
Operation mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 28 mm
Above the wall: 21 mm.

Colour	Type	Order code	Pack/Qty.
anthracite	**64765-81-500**	2CKA006800A2883	1
ivory white	**64765-82-500**	2CKA006800A2885	1
studio white	**64765-84-500**	2CKA006800A2889	1
studio white, matt [3]	**64765-884-500**	2CKA006800A2893	1
black matt [3]	**64765-885-500**	2CKA006800A2895	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Please order the respective flush-mounted insert separately.

carat®

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, basic sensor [1] [2]
with select-lens

Movement detector sensor with with measurement of ambient light.
For automatic switching of devices dependent on motion and brightness.
Compatible with all free@home flex inserts.
Adjusting elements on rear side.
Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With detection display in test mode.
Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
Mounting height: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m
Detection angle: 180 °
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation
Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64761-81-500**	2CKA006800A2921	1
ivory white	**64761-82-500**	2CKA006800A2923	1
studio white	**64761-84-500**	2CKA006800A2927	1
studio white, matt [3]	**64761-884-500**	2CKA006800A2931	1
black matt [3]	**64761-885-500**	2CKA006800A2933	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor [1] [2]
with select-lens

Movement detector sensor with with measurement of ambient light.
For automatic switching of devices dependent on motion and brightness.
Push switch function possible at all times.
In combination with dimmer insert flex: dimming function of lighting and selectable light value storage.
With enabling of pre-warning of switch-off for stairwell operation.
Compatible with all free@home flex inserts.
Adjusting elements on rear side.
Extension of the detection range by means of master/slave combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
With continuous light/continuous Off function.
With detection display in test mode.
Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
Mounting height: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m
Detection angle: 180 °
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation
Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64762-81-500**	2CKA006800A2958	1
ivory white	**64762-82-500**	2CKA006800A2960	1
studio white	**64762-84-500**	2CKA006800A2964	1
studio white matt [3]	**64762-884-500**	2CKA006800A2968	1
black matt [3]	**64762-885-500**	2CKA006800A2970	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

carat®

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with select-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. ./. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Works with free@home. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U.

Colour	Type	Order code	Pack/Qty.
anthracite	62762-81-WL-500	2CKA006200A0166	1
ivory white	62762-82-WL-500	2CKA006200A0168	1
studio white	62762-84-WL-500	2CKA006200A0172	1
studio white matt [3]	62762-884-WL-500	2CKA006200A0176	1
black matt [3]	62762-885-WL-500	2CKA006200A0178	1

[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with multi-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**62764-81-WL-500**	2CKA006200A0234	1
ivory white	**62764-82-WL-500**	2CKA006200A0236	1
studio white	**62764-84-WL-500**	2CKA006200A0240	1
studio white matt [3]	**62764-884-WL-500**	2CKA006200A0244	1
black matt [3]	**62764-885-WL-500**	2CKA006200A0246	1

[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor [1] [2] with multi-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With continuous light/continuous Off function. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U.
Mounting height: 31 mm. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Detection range: frontal: 8 m, lateral: 7 m, Mounting height: 1.1 m. Detection range 2: frontal: 8 m, lateral: 8 m, Mounting height: 2.2 m. Detection angle: 180 °
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m alternative: 2.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64764-81-500**	2CKA006800A2995	1
ivory white	**64764-82-500**	2CKA006800A2997	1
studio white	**64764-84-500**	2CKA006800A3001	1
studio white matt [3]	**64764-884-500**	2CKA006800A3005	1
black matt [3]	**64764-885-500**	2CKA006800A3007	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

carat®
Blind control / timers

Key Switch Insert [1] [2] [3] breaking circuit, 1-pole

For profile semi-cylindrical lock.
In switched-on and switched-off status the key can be pulled out in the central position, respectively.
Delivered without cylindrical lock.
Rated voltage: 250 V~. Rated current: 10 AX
Suitable for: LEDi / CFLi. Rated power: 100 W
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2733 USL-101	2CKA001101A0914	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Use the cylindrical lock according to the enclosed drawing.
[3] See profile semi-cylindrical lock.

Blind switch insert [1] [2] SP, switch

With interlock.
Rated voltage: 250 V~
Rated current: 10 AX
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/4 US-500	2CKA001012A2197	10/100
	2020/4 US-500	2CKA001413A1103	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] These blind switches/push buttons safely prevent a switch-over of the running direction being carried out too quickly.

Blind switch insert [1] [2]

With rotary knob/switch and push switch.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi. Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2712 U	2CKA001101A0534	10
	SP, N, E		
	2713 U	2CKA001101A0542	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2]

With rotary knob/push button.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2722 U	2CKA001101A0559	10
	SP, N, E		
	2723 U	2CKA001101A0567	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch/push-switch [1] [2] [3] [4]

For profile semi-cylindrical lock/switch and push-switch.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2712 USL-101	2CKA001101A0872	10
	SP, N, E		
	2713 USL-101	2CKA001101A0880	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2] [3] [4]

For profile semi-cylindrical lock/push-button.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
British Standard EN 60669-1, IEC60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2722 USL-101	2CKA001101A0898	10
	SP, N, E		
	2723 USL-101	2CKA001101A0906	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

carat®
Blind control / timers

DIN profile-semi cylindrical lock

Acc. to German Standard DIN 18252.
Total length 40 mm
for blind switches and push switches
For inserts 2712/2713/2722/2723/2733 USL-101 and 2712/2733 SLW-5x.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	different lock mechanism, with 3 keys		
	0520 PZ-VS	2CKA000470A0013	1/100
	lock mechanism, with 3 keys		
	0521 PZ-GS	2CKA000470A0021	1/100

Blind compact timer

Suitable for blind and roller blind drives with mechanical or electronic limit switch shut-off.
Without extension unit input.
Running time: 3 min. N-busbar connection is required.
For manual and time-controlled switching of blinds and roller blinds. Memory function for the simple storage of switching times. The controlled devices can be manually operated at any time. Simple setting via display with with segment display and background illumination.
Factory pre-set switching times, individual adaptations are possible. 2 switching times per day can be freely adjusted for each day of the week.
Automatic switchover from summer time to winter time (switch-off function). Switching times and programs are safely stored in the event of a mains power failure.
Power reserve for time and date > 10 years.
Simple toggling between manual/automatic/vacation modes. See the associated cover plates 6435-xx.
Programming possible only with control element attached and energized. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz
Outputs: 2x Normally open contact
Rated current: 3 A, cos ϕ 0.5. Rated power: 690 VA
Temperature range (Device): 0 °C to 45 °C

Colour	Type	Order code	Pack/Qty.
	6422 U-500	2CKA006410A0410	1/10

Brightness sensor

For insert 6411U/S-101.
With 2 m connecting cable.
Measuring range: 15-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6414-101	2CKA006410A0389	1/10

Sun sensor

For insert 6411U/S-101.
Measuring range: 5-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6482	2CKA006410A0203	1

carat®
Blind control / timers

Busch-Short-time timer insert [1]) countdown timer

For time-programmed switching of electrical consumers.
With control cover, without cover plate.
Minimum timer time: 1 second.
Maximum timer time: 9:59:59 hours.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 1x Normally open contact
Rated current: 10 A, cos ϕ 1
Rated power: 2300 VA
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6465 U-101-500	2CKA006410A0393	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
Cover frames:	1gang frame 1721 BS-2xG or Dual Box frame 1722 BSDB-2xG.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker with marking

As cover for flush-mounted blind control switch/push switch.
For inserts 2000/4 and 2020/4 US.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785 JA-81**	2CKA001751A2934	10
ivory white	**1785 JA-82**	2CKA001751A2748	10
studio white	**1785 JA-84-500**	2CKA001751A3088	10/100
studio white, matt [1])	**1785 JA-884**	2CKA001751A3022	10
black matt [1])	**1785 JA-885**	2CKA001751A3036	10

[1]) Surface painted.

Cover plate with rotary control, with marking

As cover for flush-mounted blind control switch/push switch.
For inserts 2712 U, 2713 U and 2722 U, 2723 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1740-81**	2CKA001710A3623	10
ivory white	**1740-82**	2CKA001710A3154	10
studio white	**1740-84**	2CKA001710A3172	10/100
studio white, matt [1])	**1740-884**	2CKA001710A3872	10
black matt [1])	**1740-885**	2CKA001710A3894	10

[1]) Surface painted.

Cover plate [1]) with labelling field

With marking.
For half-cylindrical type switches and blind control switch/push-switch.
For inserts 2733 USL-101 and 2712 USL-101, 2713 USL-101, 2722 USL-101, 2723 USL-101.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1755 SL/PZ-81-101**	2CKA001710A3626	10
ivory white	**1755 SL/PZ-82-101**	2CKA001710A3157	10
studio white	**1755 SL/PZ-84-101**	2CKA001710A3175	10
studio white, matt [2])	**1755 SL/PZ-884-101**	2CKA001710A3925	10
black matt [2])	**1755 SL/PZ-885-101**	2CKA001710A3902	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Control element

For Busch-Blind control II insert 6411 U-101, 6411 U/S-101.
For basic blind insert 6418 U.
For Busch-Universal 2gang 1way insert 6402 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6430-81-102**	2CKA006430A0326	1/10
ivory white	**6430-82-102**	2CKA006430A0327	1/10
studio white, matt [1])	**6430-884-102**	2CKA006430A0385	1/10
black matt [1])	**6430-885-102**	2CKA006430A0386	1/10

[1]) Surface painted.

Time switch mechanism 16 A [1]) [2]) DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 15 min
For time-programmed switching of electrical consumers.
Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird.
Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist.
Rated voltage: 230 V~, +10 % / -10 %
Rated current: 16 A, cos ϕ 0.25
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1070 U	2CKA001043A0025	1/10

[1]) For screw-fixing only
[2]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

carat®

Blind control / timers

Time switch mechanism 16 A [1] [2] DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 120 min. For time-programmed switching of electrical consumers. Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird. Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist.
Rated voltage: 230 V~, +10 % / -10 %
Rated current: 16 A, cos ϕ 0.25
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1071 U	2CKA001043A0124	1

[1] For screw-fixing only
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate

For room thermostats 1098 U-101 and 1098 UF-101.
For Busch-CO2 sensor 1091 U-500.
For blind compact timer 6422 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6435-81**	2CKA006430A0303	10
ivory white	**6435-82**	2CKA006430A0304	10
studio white	**6435-84**	2CKA006430A0306	10
studio white, matt [1]	**6435-884**	2CKA006430A0388	10
black matt [1]	**6435-885**	2CKA006430A0389	10

[1] Surface painted.

Cover plate with rotary knob, with marking

For Busch-Timer insert 1070 U.
Running time: 15 min
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1770-81-103**	2CKA001753A0255	10
ivory white	**1770-82-103**	2CKA001753A0256	10
studio white	**1770-84-103**	2CKA001753A0258	10
studio white matt [1]	**1770-884-103**	2CKA001753A0260	10
black matt [2]	**1770-885-103**	2CKA001753A0261	10

[1] Surface lacquered in aluminium.
[2] Surface painted.

carat®
Blind control / timers

Cover plate with rotary knob, with marking

For Busch-Timer insert 1071 U.
Running time: 120 min
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1771-81-103**	2CKA001753A0265	10
ivory white	**1771-82-103**	2CKA001753A0266	10
studio white	**1771-84-103**	2CKA001753A0301	10
studio white matt [1])	**1771-884-103**	2CKA001753A0303	10
black matt [1])	**1771-885-103**	2CKA001753A0304	10

[1]) Surface painted.

Blind insert, 1 gang, 2 way flex

3 wire connection (neutral conductor required). For the control of roller shutters, blind and awning motors with mechanical or electronic limit switch shut-off. Group formation via extension input possible. Operation also via conventional push buttons (2020 US non-illuminated/2021/6 UK) possible. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL.

Colour	Type	Order code	Pack/Qty.
	64831 U-500	2CKA006400A0096	1

Extension insert flex

3 wire connection (neutral conductor required). For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts.

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 1 gang, flex wireless

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Weather Station

For recording and transmitting of brightness, temperature, wind speed and rain. Weather data can be linked with actuators to automatically control functions. Weather data can be visualized in the free@home web interface and the free@home app. Remote operation via the Bluetooth and smartphone/tablet app.

Colour	Type	Order code	Pack/Qty.
	WS-1-WL.1	2CKA006200A0297	1

carat®

Blind control / timers

Standard Inputs

WS-1/A1.1 Mast adapter weather station

Colour	Type	Order code	Pack/Qty.
	WS-1/A1.1	2CKA006200A0848	1

Rocker 1gang, with “Blind” icon

As cover for ABB-free@home® sensor units and sensor/ actuator units

Colour	Type	Order code	Pack/Qty.
antracite	SRB-1-81	2CKA006220A0143	1
ivory white	SRB-1-82	2CKA006220A0518	1
studio white	SRB-1-84	2CKA006220A0145	1
studiowhite matt	SRB-1-884	2CKA006220A0603	1

Rocker 2gang left/right, “Blind” icon

As cover for ABB-free@home® sensor units and sensor/ actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRB-2-81	2CKA006220A0158	1
ivory white	SRB-2-82	2CKA006220A0523	1
studio white	SRB-2-84	2CKA006220A0160	1
studiowhite matt	SRB-2-884	2CKA006220A0608	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/ actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRS-2-R-81	2CKA006220A0173	1
ivory white	SRS-2-R-82	2CKA006220A0528	1
studio white	SRS-2-R-84	2CKA006220A0175	1
studiowhite matt	SRS-2-R-884	2CKA006220A0613	1

carat®
Socket outlets

SCHUKO® socket outlet

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUC-81-500**	2CKA002011A6215	10/100
ivory white	**20 EUC-82-500**	2CKA002011A6214	10/100
studio white	**20 EUC-84-500**	2CKA002011A6207	10/100
studio white, matt	**20 EUC-884-500**	2CKA002011A6208	10
black matt [1])	**20 EUC-885-500**	2CKA002011A6211	10/100

[1]) Surface painted.

SCHUKO® socket outlet [1]) shuttered

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCKS-81**	2CKA002013A5265	10
ivory white	**20 EUCKS-82-500**	2CKA002013A5376	10/100
studio white	**20 EUCKS-84-500**	2CKA002013A5372	10/100
studio white, matt	**20 EUCKS-884-500**	2CKA002013A5373	10/100
black matt [2])	**20 EUCKS-885**	2CKA002013A5333	10/100

[1]) Increased shock protection.
[2]) Surface painted.

SCHUKO® socket outlet [1]) [2]) shuttered

With screw-type terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**23 EUCB-81**	2CKA002013A5474	10
ivory white	**23 EUCB-82**	2CKA002013A5475	10
studio white	**23 EUCB-84**	2CKA002013A5477	10/100
studio white, matt [3])	**23 EUCB-884**	2CKA002013A5479	10
black matt [3])	**23 EUCB-885**	2CKA002013A5480	10

[1]) Increased shock protection.
[2]) With screw-type terminal for rigid and flexible wires
[3]) Surface painted.

SCHUKO® USB socket outlet, 2gang [1]) [2]) [3]) [4]) shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the SCHUKO® socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCB2USBAC-81-500**	2CKA002011A6301	1/10
ivory white	**20 EUCB2USBAC-82-500**	2CKA002011A6303	1/10
studio white	**20 EUCB2USBAC-84-500**	2CKA002011A6307	1/10
studio white matt [5])	**20 EUCB2USBAC-884-500**	2CKA002011A6311	1/10
black matt [5])	**20 EUCB2USBAC-885-500**	2CKA002011A6313	1/10

[1]) Increased shock protection.
[2]) Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[3]) No data transfer.
[4]) When cleaning the device, use dust cover 2098 for the USB-A connection.
[5]) Surface painted.

SCHUKO® socket outlet steplight® [1]) With night orientation light

With separate connection cables for switch contact.
With LED.
Shuttered.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCBLI-81**	2CKA002013A5459	1
ivory white	**20 EUCBLI-82**	2CKA002013A5292	1
studio white	**20 EUCBLI-84**	2CKA002013A5294	1
studio white, matt [2])	**20 EUCBDR-884**	2CKA002013A5420	10
black matt [2])	**20 EUCBDR-885**	2CKA002013A5421	10

[1]) Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2]) Surface painted.

carat®
Socket outlets

SCHUKO® socket outlet [1]) with labelling field

DP (2 P + E)
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUN-81**	2CKA002011A3802	10
ivory white	**20 EUN-82**	2CKA002011A3726	10
studio white	**20 EUN-84-500**	2CKA002011A6209	10/100
studio white, matt [2])	**20 EUN-884**	2CKA002011A3881	10
black matt [2])	**20 EUN-885**	2CKA002011A3884	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

SCHUKO® socket outlet [1]) with marking "EDV"

With screwless terminals.
DP (2 P + E)
Shuttered.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCKS/DV-81**	2CKA002013A5266	10
ivory white	**20 EUCKS/DV-82**	2CKA002013A5267	10
studio white	**20 EUCKS/DV-84**	2CKA002013A5268	10
studio white, matt [2])	**20 EUCKS/DV-884**	2CKA002013A5327	10
black matt [2])	**20 EUCKS/DV-885**	2CKA002013A5332	10

[1]) Increased shock protection.
[2]) Surface painted.

Busch-Protector® SCHUKO® socket outlet [1]) with overvoltage protection

DP (2 P + E)
With integrated and external signalling contact.
ISN = 5 kA
Device protection for technical sensitive equipment such as computer, entertainment electronics and building management systems.
Effectively reduces overvoltage peaks occurring between the sub-distribution switch board and SCHUKO® socket outlet.
Arrestor test class: classification Type 2
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2310 EUGL/VA-81-11**	2CKA002011A3830	1
ivory white	**2310 EUGL/VA-82-11**	2CKA002011A3831	1
studio white	**2310 EUGL/VA-84-11**	2CKA002011A3833	1
red RAL 3020	**2310 EUGL/ VA-12-82-101**	2CKA002011A6257	1/10

[1]) Connecting terminals approved in accordance with VDE 0620-1 as connectors.

SCHUKO® socket outlet with LED control light

Shuttered.
DP (2 P + E)
With transparent lens.
LED colour green.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCBL-81**	2CKA002013A5457	10
ivory white	**20 EUCBL-82**	2CKA002013A5284	10
studio white	**20 EUCBL-84**	2CKA002013A5286	10
studio white, matt [1])	**20 EUCBL-884**	2CKA002013A5336	10
black matt [1])	**20 EUCBL-885**	2CKA002013A5330	10

[1]) Surface painted.

SCHUKO® socket outlet with hinged lid

With screwless terminals.
DP (2 P + E)
Hinged lid notches when opened.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUK-81**	2CKA002018A1486	10
ivory white	**20 EUK-82**	2CKA002018A1465	10
studio white	**20 EUK-84-500**	2CKA002018A1509	10/100
studio white, matt [1])	**20 EUK-884**	2CKA002018A1494	10
black matt [1])	**20 EUK-885**	2CKA002018A1495	10

[1]) Surface painted.

Busch-Object socket outlet [1]) shuttered

With screwless terminals.
DP (2 P + E)
Incl. Cover plate with extract mechanism.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUAB-81**	2CKA002013A5404	10
ivory white	**20 EUAB-82**	2CKA002013A5405	10
studio white	**20 EUAB-84**	2CKA002013A5407	10
studio white, matt [2])	**20 EUAB-884**	2CKA002013A5409	10
black matt [2])	**20 EUAB-885**	2CKA002013A5410	10

[1]) Increased shock protection.
[2]) Surface painted.

carat®
Socket outlets

USB socket outlet earthing pin, 2gang [1] [2] [3] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the pin earth socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**20 MUCB2USBAC-81-500**	2CKA002017A1913	1
ivory white	**20 MUCB2USBAC-82-500**	2CKA002017A1914	1/10
studio white	**20 MUCB2USBAC-84-500**	2CKA002017A1916	1/10
studio white matt [4]	**20 MUCB2USBAC-884-500**	2CKA002017A1918	1/10
black matt [4]	**20 MUCB2USBAC-885-500**	2CKA002017A1919	1/10

[1] Socket outlet with integrated child protection. Replaces the usual term"...with child protection".
[2] No data transfer.
[3] When cleaning the device, use dust cover 2098 for the USB-A connection.
[4] Surface painted.

Shaver socket outlet

For installation into FM 2gang wall box 3030 and 3031.
Rated voltage: 240 V, +10 % / -10 %
Output voltage: 115 V, +10 % / -10 %
Secondary: 240 V, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 20 VA

Colour	Type	Order code	Pack/Qty.
anthracite	**2332 UJBS-81**	2CKA002130A0297	1
ivory	**2332 UJBS-82**	2CKA002130A0290	1
studio white	**2332 UJBS-84**	2CKA002130A0292	1
studio white, matt [1]	**2332 UJBS-884**	2CKA002130A0294	1
black matt [1]	**2332 UJBS-885**	2CKA002130A0295	1

[1] Surface painted.

Flush-mounting wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 135 mm x 75 mm x 47 mm

Colour	Type	Order code	Pack/Qty.
	3030	2CKA001741A0067	4

Flush-mounting cavity wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 142 mm x 75 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
	3031	2CKA001741A0068	4

13 A Switched socket outlet, 1gang

With screw-type terminals.
SP switched
Without claws.
Only for mounting in VDE flush-mounted wallboxes CFB 122 and CFBM 122.
Rated voltage: 250 V~
Rated current: 13 ABS 1363: part2

Colour	Type	Order code	Pack/Qty.
anthracite	**2190 EUC-81**	2CKA002190A0216	10/100
ivory	**2190 EUC-82**	2CKA002190A0213	10/100
studio white	**2190 EUC-84**	2CKA002190A0215	10/100
studio white, matt [1]	**2190 EUC-884**	2CKA002190A0218	10
black matt [1]	**2190 EUC-885**	2CKA002190A0219	10

[1] Surface painted.

2gang European/American socket outlet, 10A

With screw-type terminals.
SP switched
Without claws.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2192-02 UC-81-500**		
	delivery on request		
ivory white	**2192-02 UC-82-500**		
	delivery on request		
studio white	**2192-02 UC-84-500**		

carat®
Socket outlets

Socket outlet [1]) with earth pin

With screwless terminals.
Suitable for the countries: Belgium, Poland, Czech Republic.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	20 M-500	2CKA002017A0854	10/100

[1]) Insert can be used for all covers 2399 UCKS-xx.

Socket outlet cover frame shuttered

For socket outlet insert 20 M-500.

Colour	Type	Order code	Pack/Qty.
anthracite	**2399 UCKS-81**	2CKA002099A0216	10
ivory	**2399 UCKS-82**	2CKA002099A0211	10
studio white	**2399 UCKS-84**	2CKA002099A0214	10
studio white, matt [1])	**2399 UCKS-884**	2CKA002099A0255	10
black matt [1])	**2399 UCKS-885**	2CKA002099A0256	10/100

[1]) Surface painted.

Chinese socket outlet, 10 A

1gang
With screw-type terminals.
Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 10 A
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2193 EUC/10-81-500**		
	delivery on request		
ivory white	**2193 EUC/10-82-500**		
	delivery on request		
studio white	**2193 EUC/10-84-500**		

Chinese socket outlet, 16 A

1gang
With screw-type terminals.
Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2193 EUC/16-81-500**		
	delivery on request		
ivory white	**2196 EUC/16-82-500**		
	delivery on request		
studio white	**2193 EUC/16-84-500**		

Chinese and Euro American socket outlet, 10 A

1gang
With screw-type terminals.
Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2195 EUC/10-81-500**		
	delivery on request		
ivory white	**2195 EUC/10-82-500**		
	delivery on request		
studio white	**2195 EUC/10-84-500**		

International socket outlet 13A [1])

1gang
With screw-type terminals.
Without claws.
Rated voltage: 250 V~
Rated current: 13 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2197 EUC-81-500**		
	delivery on request		
ivory white	**2197 EUC-82-500**		
	delivery on request		
studio white	**2197 EUC-84-500**		

[1]) Usage may be restricted in certain countries.

Euro American socket outlet with earth, 16 A

1gang
With screw-type terminals.
Without claws.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2196 EUC-81-500**		
	delivery on request		
ivory white	**2196 EUC-82-500**		
	delivery on request		
studio white	**2196 EUC-84-500**		

carat®
Socket outlets

SCHUKO® socket outlet without claw [1]) shuttered

Without claws.
With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCRB-81**	2CKA002013A5437	10/100
ivory white	**20 EUCRB-82**	2CKA002013A5438	10/100
studio white	**20 EUCRB-84-500**	2CKA002013A5441	10/100
studio white, matt [2])	**20 EUCRB-884**	2CKA002013A5443	10
black matt [2])	**20 EUCRB-885**	2CKA002013A5444	10/100

[1]) Increased shock protection .
[2]) Surface painted.

SCHUKO® socket outlet [1]) [2]) shuttered

With screw-type terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2300 EUCB-81**	2CKA002013A5448	10
ivory white	**2300 EUCB-82**	2CKA002013A5449	10/100
studio white	**2300 EUCB-84**	2CKA002013A5451	10/100
studio white, matt [3])	**2300 EUCB-884**	2CKA002013A5453	10/100
black matt [3])	**2300 EUCB-885**	2CKA002013A5454	10/100

[1]) Increased shock protection.
[2]) With screw-type terminals
[3]) Surface painted.

Busch-Socket outlet [1]) shuttered

With screwless terminals.
DP (2 P + E)
With eject mechanism.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCBDR-81**	2CKA002013A5415	10
ivory white	**20 EUCBDR-82**	2CKA002013A5416	10
studio white	**20 EUCBDR-84**	2CKA002013A5418	10
studio white, matt [2])	**20 EUCBDR-884**	2CKA002013A5420	10
black matt [2])	**20 EUCBDR-885**	2CKA002013A5421	10

[1]) Increased shock protection.
[2]) Surface painted.

SCHUKO® socket outlet [1]) [2]) with label field, increased shock protection

Size of labelling field: 60 x 9 mm.
With screwless terminals. DP (2 P + E)
Shuttered.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCNB-81**	2CKA002013A5427	10
ivory white	**20 EUCNB-82**	2CKA002013A5428	10
studio white	**20 EUCNB-84-500**	2CKA002013A5431	10/100
studio white, matt [3])	**20 EUCNB-884**	2CKA002013A5433	10/100
black matt [3])	**20 EUCNB-885**	2CKA002013A5434	10/100

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Increased shock protection.
[3]) Surface painted.

FI-SCHUKOMAT, SCHUKO® socket outlet (RCD) [1]) [2]) [3]) with earth leakage circuit breaker

Shuttered. DP cut off (P,N)
Without PE monitoring.
With output terminals for connecting and protecting downsream SCHUKO® socket outlets.
Rated fault current: 30 mA.
With fixing claws. Rated frequency: 45-60 Hz.
Rated voltage: 230 V~. Rated current: 16 A
Protection class (Device): IP 20
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
anthracite	**3120 EUCB-81**	2CKA003116A0667	1/10
ivory white	**3120 EUCB-82**	2CKA003116A0661	1
studio white	**3120 EUCB-84**	2CKA003116A0662	1
studio white, matt [4])	**3120 EUCB-884**	2CKA003116A0670	1/10
black matt [4])	**3120 EUCB-885**	2CKA003116A0671	1/10

[1]) Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2]) Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.
[3]) Increased shock protection .
[4]) Surface painted.

Buschmat® FI - Insert [1]) with earth leakage breaker with connecting conductor

Protection of downstream consumers.
Rated fault current: 30 mA.
DP cut off (P,N)
With fixing claws.
Rated frequency: 45-60 Hz.
Rated voltage: 230 V~
Rated current: 16 A
Protection class (Device): IP 20
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
anthracite	**3151 UC-81**	2CKA003117A0009	1/10
ivory white	**3151 UC-82**	2CKA003117A0005	1/10
studio white	**3151 UC-84**	2CKA003117A0006	1/10
studio white, matt [2])	**3151 UC-884**	2CKA003117A0012	1/10
black matt [2])	**3151 UC-885**	2CKA003117A0013	1/10

[1]) Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.
[2]) Surface painted.

carat®
Socket outlets

SCHUKO® socket outlet [1]
with hinged lid and internal increased shock protection

Shuttered.
With screwless terminals.
DP (2 P + E)
with hinged lid
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKB-81**	2CKA002018A1517	10/100
ivory white	**20 EUKB-82**	2CKA002018A1518	10/100
studio white	**20 EUKB-84**	2CKA002018A1520	10/100
studio white, matt [2]	**20 EUKB-884**	2CKA002018A1522	10/100
black matt [2]	**20 EUKB-885**	2CKA002018A1523	10/100
anthracite [3]	**20 EUKBR-81**	2CKA002018A1526	10/100
ivory [3]	**20 EUKBR-82**	2CKA002018A1527	10/100
studio white [3]	**20 EUKBR-84**	2CKA002018A1529	10/100
studio white, matt [2] [3]	**20 EUKBR-884**	2CKA002018A1530	10/100
black matt [2] [3]	**20 EUKBR-885**	2CKA002018A1531	10/100

[1] Increased shock protection.
[2] Surface painted.
[3] Without claw.

SCHUKO® socket outlet [1] [2] [3]
with hinged lid and labelling field

Shuttered.
With screwless terminals.
DP (2 P + E)
with hinged lid
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNB-81**	2CKA002018A1537	10/100
ivory white	**20 EUKNB-82**	2CKA002018A1538	10/100
studio white	**20 EUKNB-84**	2CKA002018A1540	10/100
studio white, matt [4]	**20 EUKNB-884**	2CKA002018A1541	10/100
black matt [4]	**20 EUKNB-885**	2CKA002018A1542	10/100

[1] Increased shock protection.
[2] The labels are clamped under the labelling field.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4] Surface painted.

SCHUKO® socket outlet [1] with hinged lid and lock

Shuttered.
With screwless terminals.
DP (2 P + E)
With different lock mechanism.
Delivery includes 2 keys.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNBSL-81**	2CKA002018A1557	10
ivory white	**20 EUKNBSL-82**	2CKA002018A1559	10
studio white	**20 EUKNBSL-84**	2CKA002018A1563	10
studio white, matt [2]	**20 EUKNBSL-884**	2CKA002018A1565	10
black matt [2]	**20 EUKNBSL-885**	2CKA002018A1567	10

[1] Increased shock protection.
[2] Surface painted.

SCHUKO® socket outlet [1] with hinged lid and lock

Shuttered.
With screwless terminals.
DP (2 P + E)
With evenly engaging lock.
Delivery includes 2 keys.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNBSL-81-101**	2CKA002018A1558	10
ivory white	**20 EUKNBSL-82-101**	2CKA002018A1560	10
studio white	**20 EUKNBSL-84-101**	2CKA002018A1564	10
studio white, matt [2]	**20 EUKNBSL-884-101**	2CKA002018A1566	10
black matt [2]	**20 EUKNBSL-885-101**	2CKA002018A1568	10

[1] Increased shock protection .
[2] Surface painted.

SCHUKO® socket outlet [1] [2] [3]
with hinged lid, labelling field and LED control light

Shuttered.
With screwless terminals.
DP (2 P + E)
with hinged lid
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNBL-81**	2CKA002018A1548	10/100
ivory white	**20 EUKNBL-82**	2CKA002018A1549	10/100
studio white	**20 EUKNBL-84**	2CKA002018A1551	10/100
studio white, matt [4]	**20 EUKNBL-884**	2CKA002018A1552	10/100
black matt [4]	**20 EUKNBL-885**	2CKA002018A1553	10/100

[1] Increased shock protection .
[2] The labels are clamped under the labelling field.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4] Surface painted.

carat®
Data communication

Universal data connection unit, cat. 3 [1]) 1gang

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0213-500	2CKA000230A1549	10/100

[1]) Suitable for cover plate 1803-xxx.

Universal data connection box with down-leading outlet [1]) 2gang internally parallel connected

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0214	2CKA000230A0235	10/100
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Universal data connection box with down-leading outlet [1]) 2 x outlets, 8/8-pole

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0215	2CKA000230A0243	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 1gang

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without claws.
Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/11-101	2CKA000230A0409	1/10

[1]) Suitable for cover plate 1803-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 2 x outlets, 8/8-pole

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For wires of AWG 24-22. Without claws.
Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/12-101	2CKA000230A0411	1/10

[1]) Suitable for cover plate 1803-02-xxx.

carat®
Data communication

Universal data connection box 8(6)/ telephone unit 6F+N - connection box [1]) 2 x 6-pole



With straight outlet, with screw contacts.
Universal data-connection boxes: RJ 11/12, ISDN capable Cat. 3 in acc. with IEC 603-7/German Standard DIN EN 60603-7,
Telecommunication outlet (telephone unit): for 1 telephone, 1 auxiliary device or 1 data transmission unit,
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**UAE 8(6)TAE 6 F+N**	2CKA000230A0381	10/100

[1]) Suitable for cover plate 2539-xxx, 1766-xxx and 1746-2xx-FN.

Satellite co-axial outlets 2 connectors/dead-end feeder

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0230-101	2CKA000230A0250	10/100

Antenna socket insert Radio/TV 2 connectors/loop through type

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0231-101	2CKA000230A0268	10/100

Satellite co-axial outlets Radio/TV/SAT 3gang dead-end feeder

Broadband technology 47-2.150 MHz.
SAT connection designed as screwable F-male plug.
with remote feed via F-bush
For DVB-T and broadband-cable-systems.
For analogue and digital transmission.
With claw. Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0232-101-500	2CKA000230A0463	10/100

Terminating resistor 75 Ohm

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0239	2CKA000230A0201	10/100

Mounting plate [1]) [2]) with green insert



For 2 modular jack inserts.
For systems: CommScope (AVAYA / AT&T / Lucent Technologies), GigaSPEED, PowerSUM, 360 GS 10E bis MGS 600-BK, M1 BH-xx, MPS 100E-xx.
With R&M adapter R310694 suitable for R&M connection modules R305111, R305112, R305113 and R305114.
Pitch dimensions: (WxH) approx. 16.9 x 17.9 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1810-500	2CKA001753A9974	10/100

[1]) Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2]) For further information, please refer on the Internet.

Mounting plate [1]) [2]) with red insert



For 2 modular jack inserts.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
For systems: AMP / tyco Electronics, BTR, EFB, Krone, Panduit, Quante, Radiall, Setec, Dr.-Ing. Sieger, Telena, Thomas & Betts
For Telegärtner AMJ/UMJ connection modules/ couplings.
For 2 fiber optic modules of the following types: 3M-Volition, Krone, mvk.
Pitch dimensions: (WxH) approx. 14.8 x 19.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1812-500	2CKA001753A9972	10/100

[1]) Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2]) For further information, please refer on the Internet.

carat®
Data communication

Mounting plate [1] [2] with black insert

For MTRJ or 2 modular jack inserts.
For systems: Ackermann, AMP / tyco Electronics (Slim Line (SL) -SM 2gang/switches: 110Connect Jacks, Toolless Jacks / Standard 110Connect Jacks), Brand-Rex, CombiNet, EFB Electronic, Telena.
For 2 fiber optic modules of the following types: AMP / tyco Electronics MTRJ.
Pitch dimensions: (WxH) approx. 14.8 x 20.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1814-500	2CKA001753A9973	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with orange base

For 2 modular jack inserts.
For system: LexCom 150 and LexCom 250.
Pitch dimensions: (WxH) approx. 15.4 x 15.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1819	2CKA001753A8056	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with grey base

For 2 modular jack inserts.
For system: Panduit MiniCom (Cu. z.B. TX6 10 Gig Shielded Jack modules and fiber optic modules.
Pitch dimensions: (WxH) approx. 15.9 x 18.7 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1820	2CKA001753A8057	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Flush-mounted assembly adapter

For the accommodation of one or two universal modules 0219.
For flush-mounted installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/12	2CKA000230A0395	1/10

Channel assembly adapter

For the accommodation of one or two universal modules 0219.
For channel and under-floor installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/13	2CKA000230A0396	1/10

Universal module, RJ 45, cat. 6a iso, shielded [1] 1gang

For installation in installation adapter 0219/12 or 0219/13.
Also suited for mounting into cover plate 2561-xxx, 2564-02-xxx and bases 1812, 1866 EB, and 1867 EB.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Cat. 6A according to ISO/IEC 11801: 2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Bend-radius optimised cable feed (30°).
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
For 8-pole plug RJ 45 only.
Housing made from diecast zinc.
With integrated dust-protection cap (can be removed if necessary).
With insulation displacement connection
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219-101	2CKA000230A0413	1/10

[1] With assembly adapters appropriate for telephone unit cover plates 2539-21x and 1766-xxx.

carat®
Data communication

Modular-Jack insert 6-pole Cat. 3 (AMP-No. 216000-2)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0210	2CKA000225A0078	10

Modular-Jack insert 8-pole Cat. 3 (AMP-No. 216005-4)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0211	2CKA000225A0086	10

Built-in jack

For potential balancing jack cover plate and installation in cover plates.
For devices of 19 mm diameter.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0471-0-0037	2CKA000471A0037	10

Potential balancing plug

Suitable for plug 2095 UC-212 and built-in jack 0471-0-0037 acc. to German Standard DIN 42801.
For potential balancing jack cover plate (connection up to 6 mm² crimped or soldered)
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0299-0-0032	2CKA000299A0032	10

Blank plate with metal mounting plate

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1742-81**	2CKA001710A3612	10
ivory white	**1742-82**	2CKA001710A3143	10
studio white	**1742-84-500**	2CKA001710A3991	10/100
studio white, matt [1])	**1742-884**	2CKA001710A3873	10/100
black matt [1])	**1742-885**	2CKA001710A3895	10

[1]) Surface painted.

Cover plate [1])

As cover for flex outlet, for cords up to 10.3 mm diameter.
With strain relief (without terminal block).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1749-81**	2CKA001710A3614	10
ivory white	**1749-82**	2CKA001710A3145	10
studio white	**1749-84**	2CKA001710A3163	10/100

[1]) Cover plate can also be used individually as cover for telephone connector boxes (VDo).

Cover plate [1])

As cover for universal data connection boxes.
Art.-No. 0213 (Cat 3/ISDN), 0216-101, 0218/11-101 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
For WLAN access points 8186/31 and 8186/41.
Brand-Rex (WAEGV 8 EKR/EK). BTR (universal data connecting unit design and IAE design).
Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.
With labelling field.
Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1803-81**	2CKA001710A3616	10
ivory white	**1803-82**	2CKA001710A3147	10
studio white	**1803-84-500**	2CKA001710A1550	10/100
studio white, matt [2])	**1803-884**	2CKA001710A3889	10
black matt [2])	**1803-885**	2CKA001710A3912	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Cover plate [1]) 2gang

As cover for universal data connection boxes.
Art. No. 0214, 0215 (Cat 3), 0220/12-507, 0221/12-507, 0218, 0217 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
Brand-Rex (WAEGV 8/8 EKR/EK).
AMP (NETCONNECT 5E). BTR (E-DAT C6, E-DAT design, Universal data connecting unit design and IAE design).
cti (cti-wire 2.8 Cat.6).
Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.
With labelling field.
Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1803-02-81**	2CKA001710A3615	10
ivory white	**1803-02-82**	2CKA001710A3146	10
studio white	**1803-02-84-500**	2CKA001710A1551	10/100
studio white, matt [2])	**1803-02-884**	2CKA001710A3888	10
black matt [2])	**1803-02-885**	2CKA001710A3911	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

carat®
Data communication

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter.
USB power adapter insert 6475 U-500.
For loudspeaker connection box.
Suitable for part number 0248/0x-101.
For data modules.
Suitable for Art. No. 0219/12 and 0219/13.
For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1766-81**	2CKA001710A3613	10
ivory white	**1766-82**	2CKA001710A3144	10/100
studio white	**1766-84-500**	2CKA001710A3992	10/100
studio white, matt [1])	**1766-884**	2CKA001710A3926	10
black matt [1])	**1766-885**	2CKA001710A3903	10

[1] Surface painted.

Cover plate

As cover for telephone connector boxes (VDo).
Can be knocked out for single or double connection.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1745-81**	2CKA001710A3624	10
ivory white	**1745-82**	2CKA001710A3155	10
studio white	**1745-84**	2CKA001710A3173	10
studio white, matt [1])	**1745-884**	2CKA001710A3874	10
black matt [1])	**1745-885**	2CKA001710A3896	10

[1] Surface painted.

Cover plate [1]) socket outlet

Telephone socket (TDO)

Colour	Type	Order code	Pack/Qty.
anthracite	**1762-81-506**	2CKA001710A4103	10/100
ivory white	**1762-82-506**	2CKA001710A4104	10/100
studio white	**1762-84-506**	2CKA001710A4106	10/100
studio white matt [2])	**1762-884-506**	2CKA001710A4108	10/100
black matt [2])	**1762-885-506**	2CKA001710A4109	10/100

[1] Suitable insert: TDO 3x 10 OUP (for 1 telephone and 2 auxiliary devices).
[2] Surface painted.

Cover plate [1]) [2])
as cover for standard Radio/TV/SAT socket outlets

With 2 connectors
Acc. to German Standard DIN 45330.
Radio/TV/SAT.
With M3 fixing screw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1743-81**	2CKA001724A4252	10
ivory white	**1743-82**	2CKA001724A2758	10
studio white	**1743-84-500**	2CKA001724A4332	10/100
studio white, matt [3])	**1743-884**	2CKA001724A4293	10/100
black matt [3])	**1743-885**	2CKA001724A4298	10/100

[1] Third opening can be knocked out.
[2] See inserts for satellite coaxial socket outlets.
[3] Surface painted.

Cover plate



As cover for 4gang Satellite co-axial socket outlet EVU 02 F, GEVU 15 S from Hirschmann.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1743-04-81**	2CKA001724A4374	10
ivory white	**1743-04-82**	2CKA001724A4375	10
studio white	**1743-04-84**	2CKA001724A4377	10
studio white, matt [1])	**1743-04-884**	2CKA001724A4379	10
black matt [1])	**1743-04-885**	2CKA001724A4380	10

[1] Surface painted.

Cover plate

As cover for 4gang Satellite co-axial socket outlet SAT400/EAS/DC, EAS 405, 413 DAS from Ankaro.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1743/10-04-81**	2CKA001724A4365	10
ivory white	**1743/10-04-82**	2CKA001724A4366	10
studio white	**1743/10-04-84**	2CKA001724A4368	10/100
studio white, matt [1])	**1743/10-04-884**	2CKA001724A4370	10
black matt [1])	**1743/10-04-885**	2CKA001724A4371	10

[1] Surface painted.

carat®
Data communication

Cover plate [1]) with labelling field

For modular jack with slide entrance.
To fit only Art. No. 1810, 1812, 1814, 1816, 1818, 1819 and 1820.
Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1800-81**	2CKA001710A3627	10
ivory white	**1800-82**	2CKA001710A3158	10
studio white	**1800-84-500**	2CKA001710A3990	10/100
studio white, matt [2])	**1800-884**	2CKA001710A3887	10
black matt [2])	**1800-885**	2CKA001710A3910	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Cover plate

For 1 modular jack.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2561-81**	2CKA001753A0400	10
ivory white	**2561-82**	2CKA001753A0401	10
studio white	**2561-84**	2CKA001753A0403	10
studio white, matt [1])	**2561-884**	2CKA001753A0405	10
black matt [1])	**2561-885**	2CKA001753A0406	10

[1]) Surface painted.

Cover plate

For 2 modular jack inserts.
Suitable for Art. No. 0210 and 0211.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2561-02-81**	2CKA001753A0317	10
ivory white	**2561-02-82**	2CKA001753A0392	10
studio white	**2561-02-84**	2CKA001753A0394	10
studio white, matt [1])	**2561-02-884**	2CKA001753A0396	10
black matt [1])	**2561-02-885**	2CKA001753A0397	10

[1]) Surface painted.

Cover plate

For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1746/10-81**	2CKA001710A3628	10
ivory white	**1746/10-82**	2CKA001710A3521	10
studio white	**1746/10-84-500**	2CKA001710A3993	10/100
studio white, matt [1])	**1746/10-884**	2CKA001710A3875	10
black matt [1])	**1746/10-885**	2CKA001710A3897	10

[1]) Surface painted.

Intermediate ring - Reflex SI/SI Linear

For fitting cover plates from the Busch-Duro 2000® SI and Reflex SI range.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1747 SI-82**	2CKA001710A3862	10
studio white	**1747 SI-84**	2CKA001710A3863	10

Intermediate ring - Busch-balance® SI

For attaching cover plates from the Busch-balance® SI range.
Delivery without cover plate.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1747 BSI-81**	2CKA001710A4093	10
ivory white	**1747 BSI-82**	2CKA001710A4094	10
studio white	**1747 BSI-84**	2CKA001710A4096	10/100

carat®

Data communication

Cover plate [1])

With hinged lid.
For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1746-81**	2CKA001710A3618	10
ivory white	**1746-82**	2CKA001710A3149	10
studio white	**1746-84**	2CKA001710A3167	10
studio white, matt [2])	**1746-884**	2CKA001710A3876	10
black matt [2])	**1746-885**	2CKA001710A3898	10

[1]) Combinable only with covers for flush-mounted inserts.
[2]) Surface painted.

Intermediate ring with hinged lid [1]) - Busch-balance® SI

For attaching cover plates from the Busch-balance® SI range.
Delivery without cover plate.
With sealing ring. With hinged lid.
Protection class (Device): IP 44
Dimensions: (L x W x D): 63 mm x 63 mm x 20 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**2518-WD-81**	2CKA001719A0217	10
ivory white	**2518-WD-82**	2CKA001719A0218	10
studio white	**2518-WD-84**	2CKA001719A0220	10
studio white, matt [2])	**2518-WD-884**	2CKA001719A0222	10
black matt [2])	**2518-WD-885**	2CKA001719A0223	10

[1]) Combinable only with covers for flush-mounted inserts.
[2]) Surface painted.

XLR centre plate

As cover for Neutrik plug connectors, type D series.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2553-81**	2CKA001724A4399	10
ivory white	**2553-82**	2CKA001724A4400	10
studio white	**2553-84**	2CKA001724A4402	10
studio white, matt [1])	**2553-884**	2CKA001724A4404	10
black matt [1])	**2553-885**	2CKA001724A4405	10

[1]) Surface painted.

Equipotential socket outlet 2gang

Without claws.
For connecting wires up to 1 x 6 mm² and 4 x 2.5 mm².
IEC 60601-1:2005; DIN EN 60601 (VDE 0750-1): July 2007
Connection bolts German Standard DIN 42801.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2095 UC-81**	2CKA002495A0084	10
ivory white	**2095 UC-82**	2CKA002495A0085	10
studio white	**2095 UC-84**	2CKA002495A0086	10
studio white, matt [1])	**2095 UC-884**	2CKA002495A0091	10
black matt [1])	**2095 UC-885**	2CKA002495A0092	10

[1]) Surface painted.

carat®
Data communication

Cover plate with metal mounting plate

With screw-type terminal.
Fixed with central locknut.
As cover for pilot devices with a diameter of 22.5 mm
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2533-81**	2CKA001724A4254	10
ivory white	**2533-82**	2CKA001724A4255	10
yellow	**2533-82-15**	2CKA001724A4382	10
studio white	**2533-84**	2CKA001724A4256	10
studio white, matt [1])	**2533-884**	2CKA001724A4296	10
black matt [1])	**2533-885**	2CKA001724A4301	10

[1]) Surface painted.

Cover plate [1]) with metal mounting plate

For communication devices.
With labelling field 60.2 x 10.2 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1758-81**	2CKA001724A4253	10
ivory white	**1758-82**	2CKA001724A2759	10
studio white	**1758-84**	2CKA001724A2761	10/100
studio white, matt [2])	**1758-884**	2CKA001724A4307	10
black matt [2])	**1758-885**	2CKA001724A4299	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

carat®
Multimedia / communication adapters

Busch-Radio DAB+ [1])

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Control/Signal outputs: 2, Loudspeaker output, impedance 4 Ohm
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8215 U-101-500	2CKA008200A0276	1/10

[1]) No claw. Screw-fixing via keyholes.

carat®

Multimedia / communication adapters

Busch-Radio BTconnect DAB+ [1])
With Bluetooth interface for music replay.

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
With Bluetooth interface for music replay of mobile devices.
Connection of external Bluetooth loudspeakers possible.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Bluetooth specification: 4.2.
Bluetooth profiles supported: A2DP
Number of stored Bluetooth connections: max. 8
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Bluetooth

Colour	Type	Order code	Pack/Qty.
	8217 U-101-500	2CKA008200A0279	1/10

[1]) No claw. Screw-fixing via keyholes.

carat®

Multimedia / communication adapters

Loudspeaker insert [1] 5 cm (2")

With flat plug connector.
With broadband characteristics.
Rated output: 2 W (RMS)
Incl. speaker connection cable.
Frequency response: 200 - 20,000 Hz
Impedance: 4 Ohm
Protection class (Device): IP 20, SELV
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1/10

[1] No claw. Screw-fixing via keyholes.

Flush Mounted Inserts Flush-mounted installation boxes and inserts

Multi media connector ins.

Colour	Type	Order code	Pack/Qty.
	8231 U	2CKA008200A0223	1/10

[1] No claw. Screw-fixing via keyholes.

USB power adapter insert, flush-mounted [1] [2] [3] with USB-A & USB-C interface

For supply and support of mobile devices via USB-cable.
With USB type A and USB type C female connector.
To support two devices at the same time. Supports automatic negotiating of optimum charging parameters for the shortest charging times. Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A. Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0.
With electronic short-circuit protection. With electronic overload protection.
Rated voltage: 220 - 230 V AC. Rated frequency: 50 Hz - 60 Hz
Outputs: 2x USB charging interface
Suitable for: Only USB-A bus occupied:
Rated current: 3000 mA. Output voltage: 5 V-
Suitable for: Only USB-C bus occupied:
Rated power: 18 W
Suitable for: USB-A and USB-C bus occupied. Total:
Rated current: 3250 mA
Output voltage: 5 V-
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.
[3] When cleaning the device, use dust cover 2098 for the USB-A connection.

HDMI connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link high-definition digital audio and video data from e.g. SAT-receiver, DVD-/Blue-Ray-player to plasma-type, LCD- or-LED-TVs/screens.
HDMI-type A, 3D-compatible.
Fully HD ready (1920 x 1080 pixel).
For 20-wire HDMI-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/31-500**	2CKA000230A0430	1
grey	**0261/33-500**	2CKA000230A0432	1
alpine white	**0261/32-500**	2CKA000230A0431	1

[1] Please follow the recommendations of the cable and device producers for the max. HDMI cable lengths.

VGA connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link analogue video data between PCs and laptops to monitors or digital projectors etc.
VGA-type: D-type, 15-pole.
Fully HD ready (1920 x 1080 pixel).
For 15-wire VGA-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/21-500**	2CKA000230A0424	1
grey	**0261/23-500**	2CKA000230A0426	1
alpine white	**0261/22-500**	2CKA000230A0425	1

[1] Please follow the recommendations of the cable and device producers for the max. VGA cable lengths.

carat®

Multimedia / communication adapters

USB connection unit [1]) with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link mobile devices like e.g. printer, scanner, USB-sticks or digital cameras etc.
USB-type A, USB 2.0 compatible.
For 5-wire USB- cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/11-500**	2CKA000230A0418	1
grey	**0261/13-500**	2CKA000230A0420	1
alpine white	**0261/12-500**	2CKA000230A0419	1

[1]) Please follow the recommendations of the cable and device producers for the max. USB cable lengths.

Communication adapter for BNC-F Duct-jacks

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0262/11-500**	2CKA000230A0436	1
grey	**0262/13-500**	2CKA000230A0438	1
alpine white	**0262/12-500**	2CKA000230A0437	1

F duct-jack for communication adapter

For connection of antenna cables e.g.. for TVs with integrated TV-tuner and satellite receiver.
With screw-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**0262-500**	2CKA000230A0440	1

Communication adapter for Cinch-jacks

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate. Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0263/11-500**	2CKA000230A0444	1
grey	**0263/13-500**	2CKA000230A0446	1
alpine white	**0263/12-500**	2CKA000230A0445	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked white: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
alpine white	**0263/04-500**	2CKA000230A0451	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked black: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
black	**0263/05-500**	2CKA000230A0452	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked red: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Red	**0263/06-500**	2CKA000230A0453	1

Cinch-jacks for communication adapter

For connecting analogue video devices, such as DVD players, hard disc recorders, video recorders or receivers.
Marked yellow: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
yellow	**0263/07-500**	2CKA000230A0454	1

Communication adapter for Mini-jacks 3,5mm.

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0264/11-500**	2CKA000230A0458	1
grey	**0264/13-500**	2CKA000230A0460	1
alpine white	**0264/12-500**	2CKA000230A0459	1

carat®

Multimedia / communication adapters

Mini-jack 3,5 mm for communication adapter

For the connection of mobile terminal devices such as MP3 player (stereo), mobile telephone and smartphones.
Audio-band 20Hz - 20kHz.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
chrome gloss	**0264-500**	2CKA000230A0462	1

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0248/02-101**	2CKA000230A0402	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**0248/05-101**	2CKA000230A0404	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Cover plate

For Busch-Radio DAB+ 8215 U-101.
For Busch-Radio BTconnect DAB+ 8217 U-101.
For Busch-Radio iNet 8216 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**8252-81-101-500**	2CKA008200A0249	10
ivory white	**8252-82-101-500**	2CKA008200A0251	10
studio white	**8252-84-101-500**	2CKA008200A0255	10
studio white matt [1])	**8252-884-101-500**	2CKA008200A0259	10
black matt [1])	**8252-885-101-500**	2CKA008200A0261	10

[1]) Surface painted.

carat®

Multimedia / communication adapters

Cover plate

For loudspeaker insert 8223 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**8253-81**	2CKA008200A0078	1/10
ivory white	**8253-82**	2CKA008200A0079	1/10
studio white	**8253-84**	2CKA008200A0081	1/10
studio white, matt [1])	**8253-884**	2CKA008200A0123	1/10
black matt [1])	**8253-885**	2CKA008200A0126	1/10

[1]) Surface painted.

Cover plates (partly incl. Insert) Hotel application

C-plate media connector.

Colour	Type	Order code	Pack/Qty.
anthracite	**8256-81**	2CKA008200A0227	1/10
ivory white	**8256-82**	2CKA008200A0229	1/10
studio white	**8256-84**	2CKA008200A0224	1/10
studio white, matt [1])	**8256-884**	2CKA008200A0226	1/10
black matt [1])	**8256-885**	2CKA008200A0228	1/10

[1]) Surface painted.

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter.
USB power adapter insert 6475 U-500.
For loudspeaker connection box.
Suitable for part number 0248/0x-101.
For data modules.
Suitable for Art. No. 0219/12 and 0219/13.
For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1766-81**	2CKA001710A3613	10
ivory white	**1766-82**	2CKA001710A3144	10/100
studio white	**1766-84-500**	2CKA001710A3992	10/100
studio white, matt [1])	**1766-884**	2CKA001710A3926	10
black matt [1])	**1766-885**	2CKA001710A3903	10

[1]) Surface painted.

Cover plate with metal mounting plate

With fixing claws.
loudspeaker inserts and cover.
With soldering tag.
For covering universal data communication connectors and circular connectors with screwed plug M 16x0.75 (installable in insert) in accordance with DIN 41524, 41529, 45322, 45327, 45328 and 45329.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1751-81**	2CKA001723A0253	10
ivory white	**1751-82**	2CKA001723A0239	10
studio white	**1751-84**	2CKA001723A0240	10/100
studio white, matt [1])	**1751-884**	2CKA001723A0260	10
black matt [1])	**1751-885**	2CKA001723A0259	10

[1]) Surface painted.

Cover plate with rotary control, with marking

As a cover for volume controllers.
Suitable for the >LR mono BJ FM< devices of WHD.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1740 DR/03-81**	2CKA001710A4120	10
ivory white	**1740 DR/03-82**	2CKA001710A3807	10
studio white	**1740 DR/03-84**	2CKA001710A3808	10
studio white, matt [1])	**1740 DR/03-884**	2CKA001710A3870	10
black matt [1])	**1740 DR/03-885**	2CKA001710A3892	10

[1]) Surface painted.

Cover plate for Busch-powerDock

END OF LIFE

For Busch-powerDock charging cradle.

Colour	Type	Order code	Pack/Qty.
anthracite	**6477-81**	2CKA006400A0056	10
ivory white	**6477-82**	2CKA006400A0057	10
studio white	**6477-84**	2CKA006400A0059	10/100
studio white matt [1])	**6477-884**	2CKA006400A0062	10
black matt [1])	**6477-885**	2CKA006400A0063	10

[1]) Surface painted.

carat®
Room thermostats

Room thermostat, flush-mounted [1] [2] [3]

END OF LIFE

Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094U-101-500	2CKA001032A0512	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Slide switch

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 U-500	2CKA001032A0514	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Sliding switch, 24 V

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~
Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 U	2CKA001032A0485	1
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] 1gang 2way

END OF LIFE

With fixing claws.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097-101-500	2CKA001032A0513	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

carat®
Room thermostats

Room thermostat, flush-mounted [1] [2] [3]
Actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached. With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 UTA	2CKA001032A0487	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Sliding switch, actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached. With built-in slide switch and control lamp for nightly reduction of 4 K. With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UTA	2CKA001032A0488	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Sliding switch, actual value indication, 24 V

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached. With built-in slide switch and control lamp for nightly reduction of 4 K. With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~. Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 UTA	2CKA001032A0489	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Change-over contact, actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
With fixing claws.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 UTA	2CKA001032A0490	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Change-over contact, setpoint indication, timer

END OF LIFE

With change-over contact.
Easy adjustment using menu and text-based display.
4 switching times per day can be user-defined for each day of the week.
With fixing claws.
Automatic summer/wintertime switch-over
Power reserve > 10 hours.
To fit cover plate 6435-xxx.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 U-101	2CKA001032A0508	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] Remote sensor

END OF LIFE

With remote sensor and thermal feedback
For underfloor heating. With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws. Remote sensor cable length: 4 m.
Sensor =NTC, 10 kilo-ohm at 25 degrees C.
Adjusting range: +10 to +50° C. Connecting cable: 1mm² to 2.5 mm². Separate terminal to activate nighttime mode and reduction of room temperature by 4K. Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~
Rated current: 16 A, cos ϕ 1
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UF	2CKA001032A0497	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

carat®
Room thermostats

Room thermostat, flush-mounted 1) 2) Change-over contact, setpoint indication, timer, remote sensor

END OF LIFE

With change-over contact.
Easy adjustment using menu and text-based display.
4 switching times per day can be user-defined for each day of the week. With fixing claws.
Automatic summer/wintertime switch-over
Remote sensor cable length: 4 m.
Sensor =NTC, 10 kilo-ohm at 25 degrees C.
Power reserve > 10 hours To fit cover plate 6435-xxx.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 16 A
Temperature range (Device): 10 °C to 50 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 UF-101	2CKA001032A0509	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.

Room Thermostat

NEW

Electronic room thermostat, open contact, fm
Normally open contact, non-isolated
Switch contact opens when the set temperature is reached. Without fixing claws.
Separate terminal to activate eco mode to reduce the room temperature by 3K. See respective cover plates 1794 R-xx. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Power dissipation: ≤ 0,15 W
Rated current: 10 A. Temperature range (device): 5 °C - 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm. Protection class device: IP 20
Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete. Servo-valves, "de-energised open", are necessary for connection to thermostat. e.g. Article No. 6164/10-102. Switching temperature difference: ± 0.5 K

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0525	1/10
	1097 U-101-500	2CKA001032A0528	1/10
	1099 UHK-101-500	2CKA001032A0531	1/10

Room thermostat, flush-mounted [1] [2] [3] Heating/cooling

END OF LIFE

With separate connection (230 V~) for external switchover between heating or cooling.
Switch contact opens when the set temperature is reached. With fixing claws.
Nominal current: 10 A heating
Nominal current: 5 A cooling
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Temperature range (Device): 5 °C to 30 °C. Dimensions: (L x W x D): 12 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1099UHK-101-500	2CKA001032A0515	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Heating/cooling, sliding switch

END OF LIFE

With built-in sliding switch for switchover between cooling or heating.
Switch contact opens when the set temperature is reached.
With fixing claws.
Nominal current: 10 A heating
Nominal current: 5 A cooling
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 12 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1099 UHKEA	2CKA001032A0516	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

RTC Room Temperature Controller

NEW

Room Temperature Controller for Room thermostat Bluetooth with Setpoint display, Timer and Remote control Button 230 V

Colour	Type	Order code	Pack/Qty.
	1095 UTA-BT-500	2CKA001032A0534 Insert - Bluetooth	1
	1094 USITA-BT-500	2CKA001032A0536 Insert - Bluetooth	1
	1096 UTA-BT-500	2CKA001032A0538 Insert - Bluetooth	1
	1099 UHKTA-BT-500	2CKA001032A0540 Insert - Bluetooth	1
	62841 U-WL-500	2CKA006800A3115 Insert - free@home	1
	62842 U-WL-500	2CKA006800A3117 Insert - free@home	1
	62843 U-WL-500	2CKA006800A3119 Insert - free@home	1

Cover plate for room thermostat

For room thermostats 1094 U, 1097 U.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1794-81**	2CKA001710A3629	10
ivory white	**1794-82**	2CKA001710A3543	10
studio white	**1794-84**	2CKA001710A3544	10
studio white, matt [1]	**1794-884**	2CKA001710A3884	10
black matt [1]	**1794-885**	2CKA001710A3907	10

[1] Surface painted.

carat®
Room thermostats

Cover plate for room thermostat

For room thermostats 1094 U, 1097 U.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1794-81**	2CKA001710A3629	10
ivory white	**1794-82**	2CKA001710A3543	10
studio white	**1794-84**	2CKA001710A3544	10
studio white, matt [1])	**1794-884**	2CKA001710A3884	10
black matt [1])	**1794-885**	2CKA001710A3907	10

Cover plate for room thermostat

With sliding switch for nightly room temperature reduction.
to activate nighttime mode and reduction of room temperature by 4K, for thermostats 1095 U, 1096 U and 1095 UF.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1795-81**	2CKA001710A3630	10
ivory white	**1795-82**	2CKA001710A3568	10
studio white	**1795-84**	2CKA001710A3569	10
studio white, matt [1])	**1795-884**	2CKA001710A3886	10
black matt [1])	**1795-885**	2CKA001710A3909	10

Cover plate for room thermostat

For room thermostats 1094 UTA, 1097 UTA.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1794 TA-81**	2CKA001710A3695	10
ivory white	**1794 TA-82**	2CKA001710A3696	10
studio white	**1794 TA-84**	2CKA001710A3698	10
studio white, matt [1])	**1794 TA-884**	2CKA001710A3883	10
black matt [1])	**1794 TA-885**	2CKA001710A3906	10

Cover plate for room thermostat

With sliding switch for nightly room temperature reduction.
For room thermostats 1095 UTA, 1096 UTA.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1795 TA-81**	2CKA001710A3722	10
ivory white	**1795 TA-82**	2CKA001710A3723	10
studio white	**1795 TA-84**	2CKA001710A3725	10
studio white, matt [1])	**1795 TA-884**	2CKA001710A3885	10
black matt [1])	**1795 TA-885**	2CKA001710A3908	10

Cover Plate, Thermostat Various symbols for Thermostat anthracite - Platform 63

NEW

Central plate with print for room temperature controller with display/Bluetooth or free@home wireless
For room temperature controller with display:
1094 USITA-BT - 1095 UTA-BT - 1096 UTA-BT -
1099 UHKTA-BT - 62841 U-WL - 62842 U-WL - 62843 U-W

Colour	Type	Order code	Pack/Qty.
anthracite	**1794 MDRT-81**	2CKA006430A0417	
ivory white	**1794 MDRT-82**	2CKA006430A0418	
studio white	**1794 MDRT-84-500**	2CKA006430A0421	
studio white matt [1])	**1794 MDRT-884**	2CKA006430A0423	
black matt [1])	**1794 MDRT-885**	2CKA006430A0424	

Cover plate

For comfort timer control element 6455-101-500.
For standard timer control element 6456-101.
For room thermostats 1098 U-101 and 1098 UF-101.
For short-time timer 6465 U-101. For Busch-CO2 sensor 1091 U-500. For blind compact timer 6422 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6435-81**	2CKA006430A0303	10
ivory white	**6435-82**	2CKA006430A0304	10
studio white	**6435-84**	2CKA006430A0306	10
studio white, matt [1])	**6435-884**	2CKA006430A0388	10
black matt [1])	**6435-885**	2CKA006430A0389	10

Cover plate for room thermostat

For room temperature controller 1099 UHK.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1795 HK-81**	2CKA001710A4013	10
ivory white	**1795 HK-82**	2CKA001710A4015	10
studio white	**1795 HK-84**	2CKA001710A4017	10
studio white, matt [1])	**1795 HK-884**	2CKA001710A4019	10
black matt [1])	**1795 HK-885**	2CKA001710A4020	10

Cover plate for room thermostat

For room temperature controller 1099 UHKEA.
With sliding switch for switchover between cooling or heating.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1795 HKEA-81**	2CKA001710A4045	10
ivory white	**1795 HKEA-82**	2CKA001710A4047	10
studio white	**1795 HKEA-84**	2CKA001710A4049	10
studio white, matt [1])	**1795 HKEA-884**	2CKA001710A4051	10
black matt [1])	**1795 HKEA-885**	2CKA001710A4052	10

[1]) Surface painted.

carat®

Room thermostats

Cover Plate Thermostat Turn button - 63x63

NEW

C-plate for room thermostats 1094 U-101, 1097 U-101, 1099 U-101.

Colour	Type	Order code	Pack/Qty.
anthracite	**1794 R-81**	2CKA001710A4198	10
ivory white	**1794 R-82**	2CKA001710A4199	10
studio white	**1794 R-84**	2CKA001710A4201	10

LED light

Info light unit [1] [2]

Size of information field 43 x 43 mm.
Long service life of the lighting element (LEDs).
Homogeneous backlighting of the information field.
Colour temperature 6,500 K (cold white)
Power consumption: < 0.5 W
Rated voltage: 230 V~. Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2062 U	2CKA001511A0115	1/10

[1] Use relay inserts when switching through movement sensors or comfort switches.
[2] For switching the LED flush mounted insert use switches without orientation light only.

Cover plate [1] [2]

As cover for flush-mounted info light.
For insert 2062 U.
Size of information field 43 x 43 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1716-81**	2CKA001731A1921	1
ivory white	**1716-82**	2CKA001731A1922	1
studio white	**1716-84**	2CKA001731A1923	1
studio white, matt [3]	**1716-884**	2CKA001731A1978	1
black matt [3]	**1716-885**	2CKA001731A1980	1

[1] Included with the cover are 46 different text labels and symbols.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Surface painted.

Cap for indication lamp

For indication lamps.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
clear-transparent	**1565-11**	2CKA001565A0167	10
red	**1565-12**	2CKA001565A0175	10
green	**1565-13**	2CKA001565A0183	10

Busch-Infoline®

Cover plate [1] [2] 1gang, with labelling field

With operating knob. For signal/cancel push-button 1520/1 UK. For monitoring unit 1511 U.
For Busch-Leakage guard insert 1531 U.
With labelling field 61 x 20 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1571 CN-84**	2CKA001582A0346	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] 2gang, with labelling field

With operating knob. For signal push-button insert 1520/1 UKZ. With labelling field 61 x 20 mm.
With exchangeable inlays in read and green for the individual designation of the operating knob.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1572 CN-84**	2CKA001582A0348	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] with red and neutral light panel and labelling field

For Alarm Control Unit insert 1515 U-12.
For Busch-Alarm signal insert 1563 U-12.
For indication lamp insert 1564 U-1x.
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1573 CN-84**	2CKA001582A0350	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] 6gang, illuminable, with labelling field

For signal panel insert 1566 U.
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1575 CN-84**	2CKA001582A0353	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] with labelling field

For power supply insert 1518 U.
For relay insert 1539 U.
For signal generator insert 1561 U-....
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1576 CN-84**	2CKA001582A0355	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

carat®
Accessories

Extension of claws [1]

For the installation of flush-mounted SCHUKO® socket outlets and also switches, push-buttons, etc. and deeply installed flush-mounted boxes.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2148	2CKA002148A0120	100

[1] Not suitable for types 2000/3 US, 2000/6/2 US, 2000/6/6 US-101 and double socket outlets.

Braille symbol

Self-adhesive (transparent) for cover 2506-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	light		
	2144 LI	2CKA001714A0295	10/1000
	bell		
	2144 KI	2CKA001714A0296	10/1000
	key		
	2144 TR	2CKA001714A0297	10/1000

Braille symbol socket outlet

Self-adhesive, transparent for SCHUKO® socket outlets with hinged lid 20 EUK-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2144 ST	2CKA001714A0298	10/1000

DIN A 4 labelling sheet [1] plastic foil

Suitable for all to be labeled Busch-Jaeger devices.
For laser printer.
The text of the foil is printed via the Busch-Jeager labeling service.
Dimensions: (L x W x D): 297 mm

Colour	Type	Order code	Pack/Qty.
translucent	**1799/02**	2CKA001799A0959	1
transparent	**1799/03**	2CKA001799A0960	1

[1] 1 piece = 1 sheet.

RC suppressor

For protection against the damage or destruction of electronic devices due to overvoltages.
For wiring network-interconnected inductivities (e.g.. relay, protection, fluorescent lamps, transformers, etc.).
Eliminates functional disturbances on electronic devices, e.g. automatic circuit reclosure (clocking) of a movement detector.
Dimensions: diameter 25 mm, length 35 mm, length of the connecting cable approx. 100 mm.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz

Colour	Type	Order code	Pack/Qty.
	6899	2CKA006899A0231	10

Mounting set carat® flat [1] [2]

For flat flush-mounted installation, stonework
Suitable for cover frame carat®.
Set consists of a flush-mounted box for brickwork 3040.
With plastering moulding tool and positioning device.
With integrated RFID-chip for easy detection.
With vertically adjustable rotary ring.
With Torx/slotted screws.
With variable basement depth.
Mounting boxes are combinable directly.
With flex knockouts for cables or pipes.
The boxes need to be plastered.
Hole size : 82 mm
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1gang		
	3048/11	2CKA001740A0066	1/30
	2gang		
	3048/21	2CKA001740A0067	1
	3gang		
	3048/31	2CKA001740A0068	1
	4gang		
	3048/41	2CKA001740A0069	1

[1] RFID = Radio Frequency IDentification
[2] Not suitable for fixing claws.

carat®
Accessories

Mounting set carat® flat

For flat flush-mounted installation, hollow wall
Suitable for cover frame carat®.
For double planking.
Set consists of a flush-mounted box for cavity walls 3050.
With positioning device and adapter rings.
Suitable for drywalls and plasterboards for 9,5 mm, 10 mm and 12,5 mm.
With Torx/slotted screws.
Mounting boxes are combinable directly.
With flex knockouts for cables or pipes.
Fast installation via cable strap latches.
A 74 mm diameter moulding cutter with countersink is needed.
Hole size : 74 mm
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1gang		
	3058/11	2CKA001740A0077	1
	2gang		
	3058/21	2CKA001740A0078	1/20
	3gang		
	3058/31	2CKA001740A0079	1
	4gang		
	3058/41	2CKA001740A0080	1

Compensation rings for flush-mounted boxes

For additional compensation for too deep mounted flush-mounted boxes.
Adjustment height: 2,6 mm
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	3057	2CKA001740A0081	10

RFID-Detector [1])

To recover of RFID-chips.
Power supply: 9V alkaline cell (included in delivery).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	3049	2CKA001740A0070	1

[1]) RFID = Radio Frequency IDentification

carat®
Cover frames

Cover frame [1]) 1gang frame

Protection class (Device): IP 20
Dimensions: (L x W x D): 107 mm x 107 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
white glass	**1721-811**	2CKA001754A4442	1
porcelain anthracite [2]) [3]) [4]) [5])	**1721-815**	2CKA001754A4820	1
bronze [2]) [3])	**1721-821**	2CKA001754A4258	1
gold [6])	**1721-823-101**	2CKA001754A4356	1
glass black	**1721-825**	2CKA001754A4322	1
chrome	**1721-826-101**	2CKA001754A4360	1
stainless steel	**1721-860**	2CKA001754A4254	1

[1]) Flat mounting possible, a mounting set flat Art.No. 30x8/xx must be used as a flush-mounted box.
[2]) Genuine material with an individual surface.
[3]) Each cover frame is unique in structure and color nuance.
[4]) Genuine material with an open-pore surface.
[5]) Genuine material with reduced resistance against mechanical stress.
[6]) Gold plated 24 carat.

Cover frame [1]) 2gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 178 mm x 107 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
white glass	**1722-811**	2CKA001754A4443	1
porcelain anthracite [2]) [3]) [4]) [5])	**1721-815**	2CKA001754A4820	1
bronze [2]) [3])	**1722-821**	2CKA001754A4259	1
gold [6])	**1722-823-101**	2CKA001754A4357	1
glass black	**1722-825**	2CKA001754A4323	1
chrome	**1722-826-101**	2CKA001754A4361	1
stainless steel	**1722-860**	2CKA001754A4255	1

[1]) Flat mounting possible, a mounting set flat Art.No. 30x8/xx must be used as a flush-mounted box.
[2]) Genuine material with an individual surface.
[3]) Each cover frame is unique in structure and color nuance.
[4]) Genuine material with an open-pore surface.
[5]) Genuine material with reduced resistance against mechanical stress.
[6]) Gold plated 24 carat.

Cover frame [1]) 3gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 249 mm x 107 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
white glass	**1723-811**	2CKA001754A4444	1
porcelain anthracite [2]) [3]) [4]) [5])	**1723-815**	2CKA001754A4822	1
bronze [2]) [3])	**1723-821**	2CKA001754A4260	1
gold [6])	**1723-823-101**	2CKA001754A4358	1
glass black	**1723-825**	2CKA001754A4324	1
chrome	**1723-826-101**	2CKA001754A4362	1
stainless steel	**1723-860**	2CKA001754A4256	1

[1]) Flat mounting possible, a mounting set flat Art.No. 30x8/xx must be used as a flush-mounted box.
[2]) Genuine material with an individual surface.
[3]) Each cover frame is unique in structure and color nuance.
[4]) Genuine material with an open-pore surface.
[5]) Genuine material with reduced resistance against mechanical stress.
[6]) Gold plated 24 carat.

Cover frame [1]) 4gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 320 mm x 107 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
white glass	**1724-811**	2CKA001754A4445	1
bronze [2]) [3])	**1724-821**	2CKA001754A4261	1
gold [4])	**1724-823-101**	2CKA001754A4359	1
glass black	**1724-825**	2CKA001754A4325	1
chrome	**1724-826-101**	2CKA001754A4363	1
stainless steel	**1724-860**	2CKA001754A4257	1

[1]) Flat mounting possible, a mounting set flat Art.No. 30x8/xx must be used as a flush-mounted box.
[2]) Genuine material with an individual surface.
[3]) Each cover frame is unique in structure and color nuance.
[4]) Gold plated 24 carat.

Busch-dynasty®
Opulence with a story.

It's like a painting with a stylish frame. Inspired by a real fairy tale, which takes you to a different world. Exclusive design, the finest material and perfect effect. The frames decorated with curved latticework. Polished and antique brass. Beauty and functionality come together to attain perfection. Something unique for your residence.

01 polished brass, decor, ivory white
02 polished brass, decor, anthracite
03 antique brass, decor, ivory white
04 antique brass, decor, anthracite
05 polished brass, ivory white
06 polished brass, anthracite
07 antique brass, ivory white
08 antique brass, anthracite
09 ivory white
10 anthracite

Busch-dynasty®

Selected functions.

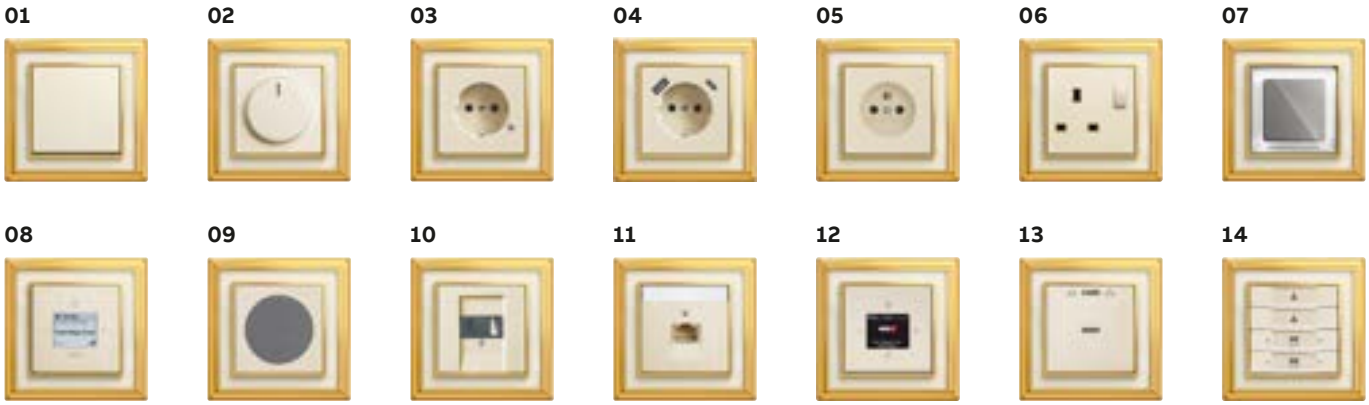

01 Rocker switch 1gang
02 Rotary dimmer
03 SCHUKO® socket outlet with LED indicator light
04 SCHUKO® USB socket outlet, USB A&C
05 Socket outlet with earthing pin
06 Switched socket outlet BS standard
07 Busch-iceLight®
08 Busch-AudioWorld® Busch-Radio iNet
09 Loudspeaker connection box
10 USB power adapter insert, USB A & C
11 RJ 45 connection socket
12 Busch-Radio DAB+
13 Intelligent card switch
14 KNX sensor, for more KNX products see part 12 of the catalogue - Intelligent Building Solutions

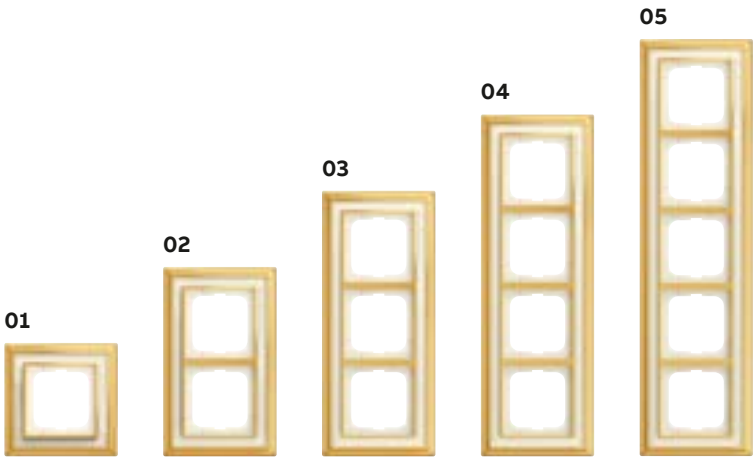

1 to 5gang cover frame for horizontal or vertical installation
01 106 x 106 mm
02 106 x 177 mm
03 106 x 283 mm
04 106 x 389 mm
05 106 x 495 mm

For more information about light switch ranges visit ABB global web sites.

Busch-dynasty®

Rocker switches / push switches

Rocker Switch Mechanism [1])



Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way		
	2000/6 US-500	2CKA001012A2198	10/100
	2gang 1way		
	2000/5 US-500	2CKA001012A1150	10/100
	DP, 1gang 2way [3])		
	2000/6/2 US	2CKA001012A0954	10
	1gang		
	2000/7 US-500	2CKA001012A2199	10/100
	DP, 1gang 1way		
	2000/2 US-500	2CKA001012A2196	10/100
	SP, 1gang 1way switch		
	2000/1 US-500	2CKA001012A2059	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1])

Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	Switch-off and two-way circuit 16 A		
	2400/6 US-500	2CKA001012A2232	10/100
	2gang switch 16 A		
	2400/5 US-500	2CKA001012A2234	10
	1gang intermediate 16 A		
	2400/7 US-500	2CKA001012A2236	10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]) 2gang 2way

With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/6/6US-101-500	2CKA001011A0928	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]) Changeover/changeover circuit 16 A

With screwless terminals.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6/6US-101-500	2CKA001022A0663	10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]) [2]) DP, 1gang 1way



For switching high loads.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/2 US-101-500	2CKA001012A2193	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Also for switching SCHUKO® socket outlets.

Rocker Switch Mechanism [1]) [2]) 3-pole, 1gang 1way switch

Rated voltage: 400 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/3 US	2CKA001011A0816	10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1])

With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way [2])		
	2000/6 USGL-500	2CKA001012A2194	10/100
	2gang 1way		
	2000/5 USGL	2CKA001012A1135	10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Replacement lamps 8360, 8362, and 8363 and LED inserts.

Busch-dynasty®

Rocker switches / push switches

Rocker Switch Mechanism, control [1]
2gang switch with N-clamp 16 A

With LED.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/5 USK-500	2CKA001012A2238	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism, control [1] [2] [3]



With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way with N-terminal		
	2000/6 USK-500	2CKA001022A0659	10/100
	DP, 1gang 1way		
	2000/2 UK	2CKA001022A0656	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Rocker Switch Mechanism, control [1] [2] [3]

Rocker Switch Mechanism, control [1] [2] [3]
Switch-off and two-way circuit with N-clamp 16 A
With neon lamp.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6 USK-500	2CKA001022A0661	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Rocker Switch Mechanism, control [1] [2] [3]



Push-switch mechanism [1]
SP, with normally open contact (operating current)
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-500	2CKA001413A0574	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With 2 independent signalling contacts.
Rated voltage: 250 V~
Inputs: 1. Outputs: 1. Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-201	2CKA001413A0483	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1]
SP, with normally open contact (operating current)

Push-switch mechanism [1] [2] [3]
SP, with normally open contact (operating current)
With illumination. With N terminal.
Rated voltage: 250 V~. Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 USGL-500	2CKA001413A1106	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.
[3] For relay and touch dimmer applications.

Push-switch mechanism [1]
SP, with normally open contact (operating current)

Push-switch mechanism [1]
With one input terminal and 2 actuating covers.
Rated voltage: 250 V~
Inputs: 1. Outputs: 2x Normally open contact
Rated current: 10 A
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-205-500	2CKA001413A1105	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1] SP, 1gang 2way



Can be wired for normally open contacts (stand-by current) or normally closed contacts (operating current).
With N terminal. Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-206-500	2CKA001413A1104	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-dynasty®

Rocker switches / push switches

Rocker

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.

Colour	Type	Order code	Pack/Qty.
anthracite	**1786-81-500**	2CKA001751A3079	10/100
ivory white	**1786-82-500**	2CKA001751A3083	10/100

Rocker

For flush-mounted switch 2g 1w, 2g push switch.

Colour	Type	Order code	Pack/Qty.
anthracite	**1785-81**	2CKA001751A2930	10
ivory white	**1785-82**	2CKA001751A2744	10/100

Rocker

For flush-mounted switch 2g 1w, 2g push switch.

Colour	Type	Order code	Pack/Qty.
anthracite	**1785 K-81-500**	2CKA001751A3122	10
ivory white	**1785 K-82-500**	2CKA001751A3124	10

Rocker with red neon lens

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.

Colour	Type	Order code	Pack/Qty.
anthracite	**1789-81**	2CKA001751A2928	10
ivory white	**1789-82**	2CKA001751A2813	10

Rocker [1] [2] with labelling field

With pilot lamp for uniform illumination of the labelling field.
For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Size of labelling field: 51 x 10 mm.

Colour	Type	Order code	Pack/Qty.
anthracite	**1764 NLI-81**	2CKA001731A1552	10
ivory white	**1764 NLI-82**	2CKA001731A1876	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Illumination using neon lamp 8353 or incandescent lamp 8344-1 and LED inserts.

CoverPlates (partly incl. Insert) Hotel application

Rocker el. push-switch

Colour	Type	Order code	Pack/Qty.
anthracite	**2570-10-81**	2CKA001751A3261	10
ivory white	**2570-10-82**	2CKA001751A3263	10

CoverPlates (partly incl. Insert) Hotel application

Rocker 2g el. push-switch

Colour	Type	Order code	Pack/Qty.
anthracite	2570-20-81	2CKA001751A3272	10
ivory white	2570-20-82	2CKA001751A3274	10

CoverPlates (partly incl. Insert) Hotel application

Rocker 3g el. push-switch

Colour	Type	Order code	Pack/Qty.
anthracite	**2570-30-81**	2CKA001751A3283	10
ivory white	**2570-30-82**	2CKA001751A3285	10

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

El. push-switch insert

Colour	Type	Order code	Pack/Qty.
	2051 U	2CKA001413A1115	10

Flush Mounted Inserts Black

El. push-switch insert 2g

Colour	Type	Order code	Pack/Qty.
	2052 U	2CKA001413A1116	10

Busch-dynasty®

Rocker switches / push switches

Flush Mounted Inserts Black

El. push-switch ins. 3g

Colour	Type	Order code	Pack/Qty.
	2053 U	2CKA001413A1117	10

Cover plate

For card switch.
For insert 2025 U.
Suitable for cards sized 54 x 86 mm.
The inner part of the cover plate is made of light-conducting plastic, so that the card slot is illuminated.

Colour	Type	Order code	Pack/Qty.
anthracite	**1792-81**	2CKA001710A3639	10
ivory white	**1792-82**	2CKA001710A3640	10

Card switch 10 A [1]) SP, with normally open contact (operating current)



Illuminable. With N terminal.
Rated voltage: 250 V~. Rated current: 10 A
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2025 U	2CKA001012A1713	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
delivery form:	Adapter plate APBS to be ordered separate.		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

CoverPlates (partly incl. Insert) Hotel application

C-plate, card switch RFID

Colour	Type	Order code	Pack/Qty.
anthracite	1792 RFID-81	2CKA001710A4130	10
ivory white	1792 RFID-82	2CKA001710A4132	10

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

With marking.
Card switch insert RFID

Colour	Type	Order code	Pack/Qty.
	2025 RFID U	2CKA001012A2242	10

Rocker

With marking.
For flush-mounted switch 2g 1w, 2g push switch.
With Marking " DO NOT DISTURB / MAKE UP ROOM"

Colour	Type	Order code	Pack/Qty.
anthracite	**1785/11-81**	2CKA001751A3205	10
ivory white	**1785/11-82**	2CKA001751A2991	10

Switch rocker with marking

As cover for flush-mounted rocker control switch insert, DND/MUR.
DO NOT DISTURB
MAKE UP ROOM
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785/11 K-81**	2CKA001751A3212	10
ivory white	**1785/11 K-82**	2CKA001751A3214	10

CoverPlates (partly incl. Insert) Hotel application

Rocker DND/MUR el. p.-swit

Colour	Type	Order code	Pack/Qty.
anthracite	**2058-24-81**	2CKA001751A3223	10
ivory white	**2058-24-82**	2CKA001751A3225	10

Rocker switch insert DND/MUR [1])



With LED.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028 UK	2CKA001012A2240	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-dynasty®

Rocker switches / push switches

Rocker switch insert DND/MUR [1)]



With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028/12 UK	2CKA001012A2241	10/100

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Flush Mounted Inserts

El. push-switch DND/MUR

Colour	Type	Order code	Pack/Qty.
	2058 UK	2CKA001413A1114	10/100

Bell push-switch DND/MUR 230 V [1)]

With LED.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
anthracite	**2029 UC-81**	2CKA001751A3167	1
ivory	**2029 UC-82**	2CKA001751A3168	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete).

Bell push-switch DND/MUR 24 V [1)]

With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
anthracite	**2029/12 UC-81**		1
ivory	**2029/12 UC-82**	2CKA001751A3236	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete).

CoverPlates (partly incl. Insert) Hotel application

Bell push-switch DND/MUR

Colour	Type	Order code	Pack/Qty.
anthracite	**2059 UC-81**	2CKA001751A3243	1
ivory	**2059 UC-82**	2CKA001751A3245	1

Friends of Hue smart switch insert Wall-mounted transmitter, 2 / 4 channel

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx. Smarter light switches for wireless remote control of Philips Hue lamps. For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology. Combinable with the Busch-Jaeger switch ranges: carat®,carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
	6716 U-500	2CKA006710A0014	1

Busch-dynasty®

Rocker switches / push switches

Bluetooth Low Energy (BLE) smart switch insert. Wall transmitter, 2 / 4 channel

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx.
- Smart switch for wireless remote control of radio components.
- Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Depending on the ecosystem, the wireless range is automatically extended via mains-powered BT mesh devices (repeater function).
- Encrypted transmission with AES-128 (CBC mode) and sequence counter.
- Contains NFC configuration interface according to NFC Forum Type 2 Tag (ISO/IEC 14443 Part 2 + 3).
- Therefore particularly simple commissioning of BLE radio components from Casambi.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
BT smart switch insert (SF)	**6716 UBT**	2CKA006710A0015	1

Smart Switch, WL NEW

Smarter light-/blind switch for wireless control of Busch-flexTronics® wireless and Busch-free@home® devices.
Wall-mounted transmitter, 2/4 channels.
Operation in ABB-flexTronics® wireless with up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required.
Programming with the ABB-free@home® Next App.
Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.
Combinable with the Busch-Jaeger switch ranges carat®,
Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®
and future® linear.

Colour	Type	Order code	Pack/Qty.
	62721 U-WL-500	2CKA006710A0048	1

1gang rocker for Friends of Hue and Bluetooth (Casambi)

Smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
anthracite	**6735 BT-81**	2CKA006730A0142	1
ivory white	**6735 BT-82**	2CKA006730A0143	1

2gang rocker for Friends of Hue and Bluetooth (Casambi)

Smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
anthracite	**6736 FoH-81**	2CKA006730A0133	1
ivory white	**6736 FoH-82**	2CKA006730A0134	1

[1] Surface painted.

Rocker
1gang, with "Blind" icon NEW

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Colour	Type	Order code	Pack/Qty.
81 anthracite	**6735-11-81**	2CKA006220A0985	1
82 ivory white	**6735-11-82**	2CKA006220A0986	1

Busch-dynasty®
Dimmers

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9] Flush-mounted, LED, 2-100 W

With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
Via mode switch adjustable between leading edge control and trailing edge control.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With adjustable minimum brightness.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10%
Rated frequency: 50 Hz/60 Hz
Nominal power: 2 - 100 W/VA (retrofit LED loads).
Nominal power: 10 - 250 W/VA (non-LED loads).
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6523 U-102-500	2CKA006512A0335	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] [2] [3] [4] flush mounted, 1-10V

With rotary control.
For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control gears
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 700 W/VA
IEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	2112 U-101-500	2CKA006599A2873	1/10

[1] Non-illuminable.
[2] Use cover plates 2115 J-.../2115-.../6540-... .
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Making-current limiters have to be provided in case of too high making currents.

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9] UP, LED, 2-400 W

Very small installation depth: < 20 mm.
With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without cover plate. Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz Nominal power: 2 - 100 W/VA (leading edge control) Nominal power: 2 - 400 W/VA (trailing edge control)

Colour	Type	Order code	Pack/Qty.
	6523 UR-104-500	2CKA006512A0354	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] Flush-mounted, DALI, tunable white

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved. For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8). Colour temperature can then be set between 2,700 K - 6,500 K. Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA. Not suitable for combining with other DALI sensors or central units of other manufacturers. For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE article no. 2116/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate. Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116 U	2CKA006599A3025	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-dynasty®
Dimmers

Busch-rotary dimmer [1]) Flush-mounted, DALI, with internal power supply, tunable white

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K. With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=. Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units: 37 in case of one active power-potentiometer in case of three active power-potentiometer in parallel connection: 111. Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices. Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116/11 U	2CKA006599A3026	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1]) flush mounted, DALI

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
An additional DALI power supply is needed, e.g. by Tridonic, Philips, Helvar or 2117/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117 U-500	2CKA006599A2987	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1]) flush mounted, DALI, with internal power supply

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor. For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. With electronic short-circuit protection. With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered. With integrated LED illumination for orientation. Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Up to 3 potentiometers are connectable in parallel in active mode. Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117/11 U-500	2CKA006599A2988	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate [1]) with rotary knob, with indication lamp

Elevated knob.
For Busch-Dimmer®.
For inserts
2112 U-101/2247 U/2250 U/6513 U-102/6517 U-10x/ 6519 U/6520 U/6523 U(R)(10x) /6591 U-10x and 6592 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6540-81-102**	2CKA006599A2950	10
ivory white	**6540-82-102**	2CKA006599A2951	10/100

[1]) Replacement neon lamp, Art. No. 3855.

Busch-dynasty®
Dimmers

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6] FM, LED, 3-240 VA

2-wire connection (neutral conductor not required). Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA). Touch dimmer for switching lighting systems. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi). For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers. For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps. Mix operaton of LEDi with conventional loads possible. With manually adjustable operating mode: trailing / leading edge control. With adjustable minimum brightness. With light-level memory and minimum brightness memory. Low-noise level by MOSFET transistors. With electronic short-circuit protection. With electronic overload protection. Without control cover. For control element flex, 1gang, 64711. For control element flex, 2gang, 64721. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Rated power: 3-240 VA (LEDi). Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 1. Outputs: 1x dimming channel. Suitable for: 230 V LEDi, typical (leading edge control). Rated power: 3 - 100 VA. Suitable for: 230 V LEDi, typical (trailing edge control). Rated power: 3 - 240 W. Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer. Rated power: 10 - 240 VA.Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Buscah-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@ home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Flex control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 2 gang, flex wireless

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@ home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Busch-dynasty®

Dimmers

Rocker 1gang, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRD-1-81	2CKA006220A0149	1
ivory white	SRD-1-82	2CKA006220A0520	1

Rocker 2gang left, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRD-2-L-81	2CKA006220A0164	1
ivory white	SRD-2-L-82	2CKA006220A0525	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRS-2-R-81	2CKA006220A0173	1
ivory white	SRS-2-R-82	2CKA006220A0528	1

ABB flexTronics inserts

Relay insert flex, 1gang [1)]

3 wire connection (neutral conductor required).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... . For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz
Inputs: 1. Outputs: 1x Normally open contact, potential-bound. Suitable for: 230 V- LEDi, typical. Rated power: 300 VA. Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 2300 W
Suitable for: Low voltage halogen lamps that are operated via transformers. Rated power: 2300 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Relay insert flex, 2gang [1)]

3 wire connection (neutral conductor required).
For switching lighting systems. For switching two independent load circuits. For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Comfort switch flex control element 64765-... . For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical. Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps.
Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-dynasty®

ABB flexTronics inserts

e-contact insert flex, 1gang [1] [2]

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1] Use only dimmable high-voltage LEDs.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6]
FM, LED, 3-240 VA

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi)
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x dimming channel
Suitable for: 230 V LEDi, typical (leading edge control)
Rated power: 3 - 100 VA
Suitable for: 230 V LEDi, typical (trailing edge control)
Rated power: 3 - 240 W
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-dynasty®

ABB flexTronics comfort switch sensor

Extension insert flex [1]

3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts.
Rated voltage: 230 V~, +10 % / -10 %, Rated frequency: 50 Hz
Control/Signal outputs: 1, electronic output, potential-bound
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Comfort switch flex sensor [1] [2]

Movement detector push-button switch combination. For switching lighting systems that depend on brightness and movement. With select lens, prevents detection of smaller animal. Push switch function possible at all times. With notice LED when manual operation is necessary. Extension of the detection range by main unit/extension unit combination. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off.
Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off. Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off. With continuous light/continuous Off function. Adjusting elements on rear side. Surveillance density: 9 sectors with 28 switching segments. Switch off delay: 1 to 10 min., adjustable. Compatible with all ABB flexTronics inserts. For relay insert flex, 1gang, 64811 U-500
For relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Display elements: LED for status display.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 5 m, lateral: 3 m, at mounting height: 1.1 m. Detection angle: 170°. Brightness limit value: 5 Lux - daytime operation. Operation mounting height: 0.8 m - 1.2 m. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 63 mm x 63 mm x 28 mm
Above the wall: 21 mm.

Colour	Type	Order code	Pack/Qty.
anthracite	**64765-81-500**	2CKA006800A2883	1
ivory white	**64765-82-500**	2CKA006800A2885	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Please order the respective flush-mounted insert separately.

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, basic sensor [1] [2] with select-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness.
Compatible with all free@home flex inserts.
Adjusting elements on rear side. Extension of the detection range by means of master/slave combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U. Mounting height: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m. Detection angle: 180 °
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64761-81-500**	2CKA006800A2921	1
ivory white	**64761-82-500**	2CKA006800A2923	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.

Busch-Watchdog 180 flex, comfort sensor [1] [2] with select-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With continuous light/continuous Off function. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m
Detection angle: 180 °. Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m. Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64762-81-500**	2CKA006800A2958	1
ivory white	**64762-82-500**	2CKA006800A2960	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.

Busch-dynasty®

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with select-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. ./. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Works with free@home. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**62762-81-WL-500**	2CKA006200A0166	1
ivory white	**62762-82-WL-500**	2CKA006200A0168	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.

Busch-Watchdog 180 flex, comfort sensor [1] [2] with multi-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With continuous light/continuous Off function. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 31 mm. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Detection range: frontal: 8 m, lateral: 7 m, Mounting height: 1.1 m. Detection range 2: frontal: 8 m, lateral: 8 m, Mounting height: 2.2 m Detection angle: 180 °. Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m alternative: 2.2 m. Temperature range (Device): -5 °C to 45 °C Dimensions: (L x W x D): 63 mm x 63 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64764-81-500**	2CKA006800A2995	1
ivory white	**64764-82-500**	2CKA006800A2997	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with multi-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**62764-81-WL-500**	2CKA006200A0234	1
ivory white	**62764-82-WL-500**	2CKA006200A0236	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.

Blind control / timers

Key Switch Insert [1] [2] [3] breaking circuit, 1-pole

For profile semi-cylindrical lock.
In switched-on and switched-off status the key can be pulled out in the central position, respectively.
Delivered without cylindrical lock.
Rated voltage: 250 V~. Rated current: 10 AX
Suitable for: LEDi / CFLi. Rated power: 100 W
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2733 USL-101	2CKA001101A0914	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Use the cylindrical lock according to the enclosed drawing.
[3] See profile semi-cylindrical lock.

Busch-dynasty®

Blind control / timers

Blind switch insert [1] [2] SP, switch

With interlock.
Rated voltage: 250 V~
Rated current: 10 AX
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/4 US-500	2CKA001012A2197	10/100
	2020/4 US-500	2CKA001413A1103	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] These blind switches/push buttons safely prevent a switch-over of the running direction being carried out too quickly.

Blind switch insert [1] [2]

With rotary knob/switch and push switch.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi. Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2712 U	2CKA001101A0534	10
	SP, N, E		
	2713 U	2CKA001101A0542	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2]

With rotary knob/push button.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2722 U	2CKA001101A0559	10
	SP, N, E		
	2723 U	2CKA001101A0567	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch/push-switch [1] [2] [3] [4]

For profile semi-cylindrical lock/switch and push-switch.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2712 USL-101	2CKA001101A0872	10
	SP, N, E		
	2713 USL-101	2CKA001101A0880	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2] [3] [4]

For profile semi-cylindrical lock/push-button.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
British Standard EN 60669-1, IEC60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2722 USL-101	2CKA001101A0898	10
	SP, N, E		
	2723 USL-101	2CKA001101A0906	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

DIN profile-semi cylindrical lock

Acc. to German Standard DIN 18252.
Total length 40 mm
for blind switches and push switches
For inserts 2712/2713/2722/2723/2733 USL-101 and 2712/2733 SLW-5x.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	different lock mechanism, with 3 keys		
	0520 PZ-VS	2CKA000470A0013	1/100
	lock mechanism, with 3 keys		
	0521 PZ-GS	2CKA000470A0021	1/100

Busch-dynasty®

Blind control / timers

Blind compact timer

Suitable for blind and roller blind drives with mechanical or electronic limit switch shut-off. Without extension unit input. Running time: 3 min. N-busbar connection is required. For manual and time-controlled switching of blinds and roller blinds. Memory function for the simple storage of switching times. The controlled devices can be manually operated at any time. Simple setting via display with with segment display and background illumination. Factory pre-set switching times, individual adaptations are possible. 2 switching times per day can be freely adjusted for each day of the week. Automatic switchover from summer time to winter time (switch-off function). Switching times and programs are safely stored in the event of a mains power failure. Power reserve for time and date > 10 years. Simple toggling between manual/automatic/vacation modes. See the associated cover plates 6435-xx. Programming possible only with control element attached and energized. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Outputs: 2x Normally open contact Rated current: 3 A, cos ϕ 0.5. Rated power: 690 VA Temperature range (Device): 0 °C to 45 °C

Colour	Type	Order code	Pack/Qty.
	6422 U-500	2CKA006410A0410	1/10

Brightness sensor

For insert 6411U/S-101.
With 2 m connecting cable.
Measuring range: 15-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6414-101	2CKA006410A0389	1/10

Sun sensor

For insert 6411U/S-101.
Measuring range: 5-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6482	2CKA006410A0203	1

Busch-Short-time timer insert [1]) countdown timer

For time-programmed switching of electrical consumers. With control cover, without cover plate.
Minimum timer time: 1 second.
Maximum timer time: 9:59:59 hours.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 1x Normally open contact
Rated current: 10 A, cos ϕ 1. Rated power: 2300 VA
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6465 U-101-500	2CKA006410A0393	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
Cover frames:	1gang frame 1721 BS-2xG or Dual Box frame 1722 BSDB-2xG.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-dynasty®

Blind control / timers

Rocker with marking

As cover for flush-mounted blind control switch/push switch.
For inserts 2000/4 and 2020/4 US.

Colour	Type	Order code	Pack/Qty.
anthracite	**1785 JA-81**	2CKA001751A2934	10
ivory white	**1785 JA-82**	2CKA001751A2748	10

Cover plate with rotary control, with marking

As cover for flush-mounted blind control switch/push switch.
For inserts 2712 U, 2713 U and 2722 U, 2723 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**1740-81**	2CKA001710A3623	10
ivory white	**1740-82**	2CKA001710A3154	10

Control element

For Busch-Blind control II insert 6411 U-101, 6411 U/S-101.
For basic blind insert 6418 U.
For Busch-Universal 2gang 1way insert 6402 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6430-81-102**	2CKA006430A0326	1/10
ivory white	**6430-82-102**	2CKA006430A0327	1/10

Cover plate

For room thermostats 1098 U-101 and 1098 UF-101.
For short-time timer 6465 U-101.

Colour	Type	Order code	Pack/Qty.
anthracite	**6435-81**	2CKA006430A0303	10
ivory white	**6435-82**	2CKA006430A0304	10

Busch-dynasty®

Blind control / timers

SCHUKO® socket outlet [1] shuttered

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCKS-81**	2CKA002013A5265	10
ivory white	**20 EUCKS-82**	2CKA002013A5244	10/100
antique brass anthracite [2]	**20 EUCKS-845-500**	2CKA002013A5401	10
antique brass ivory white [2]	**20 EUCKS-848-500**	2CKA002013A5398	10/100

[1] Increased shock protection.
[2] Real metal surface refined by hand.

SCHUKO® socket outlet [1] shuttered

With screw-type terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
antique brass anthracite [2]	**23 EUCKS-845-507**	2CKA002011A6247	10
antique brass ivory white [2]	**23 EUCKS-848-507**	2CKA002011A6245	10
anthracite [3]	**2300 EUCB-81**	2CKA002013A5448	10
ivory white [3]	**2300 EUCB-82**	2CKA002013A5449	10/100

[1] Increased shock protection.
[2] Real metal surface refined by hand.
[3] With screw-type terminals

SCHUKO® socket outlet steplight® [1] With night orientation light

With separate connection cables for switch contact.
With LED.
Shuttered.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUCBLI-82**	2CKA002013A5292	1

[1] Connecting terminals approved in accordance with VDE 0620-1 as connectors.

13 A Switched socket outlet

1gang
With screw-type terminals.
SP switched
Without claws.
Only for mounting in VDE flush-mounted wallboxes CFB 122 and CFBM 122.
Rated voltage: 250 V~
Rated current: 13 ABS 1363: part2

Colour	Type	Order code	Pack/Qty.
anthracite	**2190 EUC-81**	2CKA002190A0216	10/100
ivory white	**2190 EUC-82**	2CKA002190A0213	10/100

SCHUKO® socket outlet with hinged lid

With screwless terminals.
DP (2 P + E)
Hinged lid notches when opened.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUK-82**	2CKA002018A1465	10

SCHUKO® socket outlet [1] [2] shuttered

With screw-type terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
anthracite	**23 EUCB-81**	2CKA002013A5474	10
ivory white	**23 EUCB-82**	2CKA002013A5475	10
antique brass anthracite [3]	**23 EUCB-845-500**	2CKA002013A5481	10
antique brass ivory white [3]	**23 EUCB-848-500**	2CKA002013A5482	10

[1] Increased shock protection.
[2] With screw-type terminal for rigid and flexible wires
[3] Real metal surface refined by hand.

SCHUKO® USB socket outlet, 2gang [1] [2] [3] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the SCHUKO® socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCB2USBAC-81-500**	2CKA002011A6301	1/10
ivory white	**20 EUCB2USBAC-82-500**	2CKA002011A6303	1/10

[1] Increased shock protection.
[2] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[3] No data transfer.

Busch-dynasty®

Blind control / timers

USB socket outlet earthing pin, 2gang [1] [2] [3] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the pin earth socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**20 MUCB2USBAC-81-500**	2CKA002017A1913	1
ivory white	**20 MUCB2USBAC-82-500**	2CKA002017A1914	1/10

[1] Increased shock protection.
[2] No data transfer.

Blind insert, 1 gang, 2 way flex

3 wire connection (neutral conductor required). For the control of roller shutters, blind and awning motors with mechanical or electronic limit switch shut-off. Group formation via extension input possible. Operation also via conventional push buttons (2020 US non-illuminated/2021/6 UK) possible. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL.

Colour	Type	Order code	Pack/Qty.
	64831 U-500	2CKA006400A0096	1

Extension insert flex

3 wire connection (neutral conductor required). For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts.

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Busch-dynasty®

Blind control / timers

Control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 1 gang, flex wireless

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@ home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Weather Station

For recording and transmitting of brightness, temperature, wind speed and rain. Weather data can be linked with actuators to automatically control functions. Weather data can be visualized in the free@home web interface and the free@home app. Remote operation via the Bluetooth and smartphone/tablet app.

Colour	Type	Order code	Pack/Qty.
	WS-1-WL.1	2CKA006200A0297	1

Standard Inputs

WS-1/A1.1 Mast adapter weather station

Colour	Type	Order code	Pack/Qty.
	WS-1/A1.1	2CKA006200A0848	1

Rocker 1gang, with “Blind” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
antracite	SRB-1-81	2CKA006220A0143	1
ivory white	SRB-1-82	2CKA006220A0518	1

Rocker 2gang left/right, “Blind” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRB-2-81	2CKA006220A0158	1
ivory white	SRB-2-82	2CKA006220A0523	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRS-2-R-81	2CKA006220A0173	1
ivory white	SRS-2-R-82	2CKA006220A0528	1

Busch-dynasty®

Data communication

Universal data connection unit, cat. 3 [1]) 1gang

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0213-500	2CKA000230A1549	10/100

[1]) Suitable for cover plate 1803-xxx.

Universal data connection box with down-leading outlet [1]) 2gang internally parallel connected

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0214	2CKA000230A0235	10/100
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Universal data connection box with down-leading outlet [1]) 2 x outlets, 8/8-pole

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0215	2CKA000230A0243	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 1gang

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without claws.
Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/11-101	2CKA000230A0409	1/10

[1]) Suitable for cover plate 1803-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 2 x outlets, 8/8-pole

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For wires of AWG 24-22.
Without claws.
Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/12-101	2CKA000230A0411	1/10

[1]) Suitable for cover plate 1803-02-xxx.

Busch-dynasty®

Data communication

Universal data connection box 8(6)/ telephone unit 6F+N - connection box [1]) 2 x 6-pole



With straight outlet, with screw contacts.
Universal data-connection boxes: RJ 11/12, ISDN capable Cat. 3 in acc. with IEC 603-7/German Standard DIN EN 60603-7,
Telecommunication outlet (telephone unit): for 1 telephone, 1 auxiliary device or 1 data transmission unit,
With claw. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**UAE 8(6)TAE 6 F+N**	2CKA000230A0381	10/100

[1]) Suitable for cover plate 2539-xxx, 1766-xxx and 1746-2xx-FN.

Satellite co-axial outlets 2 connectors/dead-end feeder

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0230-101	2CKA000230A0250	10/100

Antenna socket insert Radio/TV 2 connectors/loop through type

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0231-101	2CKA000230A0268	10/100

Satellite co-axial outlets Radio/TV/SAT 3gang dead-end feeder

Broadband technology 47-2.150 MHz.
SAT connection designed as screwable F-male plug. with remote feed via F-bush
For DVB-T and broadband-cable-systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0232-101-500	2CKA000230A0463	10/100

Terminating resistor 75 Ohm

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0239	2CKA000230A0201	10/100

Mounting plate [1]) [2]) with green insert



For 2 modular jack inserts.
For systems: CommScope (AVAYA / AT&T / Lucent Technologies), GigaSPEED, PowerSUM, 360 GS 10E bis MGS 600-BK, M1 BH-xx, MPS 100E-xx.
With R&M adapter R310694 suitable for R&M connection modules R305111, R305112, R305113 and R305114.
Pitch dimensions: (WxH) approx. 16.9 x 17.9 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1810-500	2CKA001753A9974	10/100

[1]) Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2]) For further information, please refer on the Internet.

Mounting plate [1]) [2]) with red insert

For 2 modular jack inserts.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
For systems: AMP / tyco Electronics, BTR, EFB, Krone, Panduit, Quante, Radiall, Setec, Dr.-Ing. Sieger, Telena, Thomas & Betts
For Telegärtner AMJ/UMJ connection modules/ couplings.
For 2 fiber optic modules of the following types: 3M-Volition, Krone, mvk.
Pitch dimensions: (WxH) approx. 14.8 x 19.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1812-500	2CKA001753A9972	10/100

[1]) Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2]) For further information, please refer on the Internet.

Busch-dynasty®

Data communication

Mounting plate [1] [2] with black insert

For MTRJ or 2 modular jack inserts.
For systems: Ackermann, AMP / tyco Electronics (Slim Line (SL) -SM 2gang/switches: 110Connect Jacks, Toolless Jacks / Standard 110Connect Jacks), Brand-Rex, CombiNet, EFB Electronic, Telena.
For 2 fiber optic modules of the following types: AMP / tyco Electronics MTRJ.
Pitch dimensions: (WxH) approx. 14.8 x 20.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1814-500	2CKA001753A9973	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with orange base

For 2 modular jack inserts.
For system: LexCom 150 and LexCom 250.
Pitch dimensions: (WxH) approx. 15.4 x 15.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1819	2CKA001753A8056	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with grey base

For 2 modular jack inserts.
For system: Panduit MiniCom (Cu. z.B. TX6 10 Gig Shielded Jack modules and fiber optic modules.
Pitch dimensions: (WxH) approx. 15.9 x 18.7 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1820	2CKA001753A8057	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Flush-mounted assembly adapter

For the accommodation of one or two universal modules 0219.
For flush-mounted installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/12	2CKA000230A0395	1/10

Channel assembly adapter

For the accommodation of one or two universal modules 0219.
For channel and under-floor installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/13	2CKA000230A0396	1/10

Universal module, RJ 45, cat. 6a iso, shielded [1] 1gang

For installation in installation adapter 0219/12 or 0219/13.
Also suited for mounting into cover plate 2561-xxx, 2564-02-xxx and bases 1812, 1866 EB, and 1867 EB.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Cat. 6A according to ISO/IEC 11801: 2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Bend-radius optimised cable feed (30°).
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
For 8-pole plug RJ 45 only.
Housing made from diecast zinc.
With integrated dust-protection cap (can be removed if necessary).
With insulation displacement connection
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219-101	2CKA000230A0413	1/10

[1] With assembly adapters appropriate for telephone unit cover plates 2539-21x and 1766-xxx.

Busch-dynasty®

Data communication

Modular-Jack insert 6-pole Cat. 3 (AMP-No. 216000-2)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0210	2CKA000225A0078	10

Modular-Jack insert 8-pole Cat. 3 (AMP-No. 216005-4)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0211	2CKA000225A0086	10

Built-in jack

For potential balancing jack cover plate and installation in cover plates.
For devices of 19 mm diameter.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0471-0-0037	2CKA000471A0037	10

Potential balancing plug

Suitable for plug 2095 UC-212 and built-in jack 0471-0-0037 acc. to German Standard DIN 42801.
For potential balancing jack cover plate (connection up to 6 mm² crimped or soldered)
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0299-0-0032	2CKA000299A0032	10

Blank plate

With metal mounting plate

Colour	Type	Order code	Pack/Qty.
anthracite	**1742-81**	2CKA001710A3612	10
ivory white	**1742-82**	2CKA001710A3143	10

Cover plate [1])

As cover for flex outlet, for cords up to 10.3 mm diameter.
With strain relief (without terminal block).

Colour	Type	Order code	Pack/Qty.
anthracite	**1749-81**	2CKA001710A3614	10
ivory white	**1749-82**	2CKA001710A3145	10

[1]) Cover plate can also be used individually as cover for telephone connector boxes (VDo).

Cover plate [1])

As cover for universal data connection boxes.
Art.-No. 0213 (Cat 3/ISDN), 0216-101, 0218/11-101 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
For WLAN access points 8186/31 and 8186/41.
Brand-Rex (WAEGV 8 EKR/EK).
BTR (universal data connecting unit design and IAE design).
Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.
With labelling field.
Size of labelling field: 60 x 9 mm.

Colour	Type	Order code	Pack/Qty.
anthracite	**1803-81**	2CKA001710A3616	10
ivory white	**1803-82**	2CKA001710A3147	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Busch-dynasty®
Data communication

Cover plate [1] 2gang

As cover for universal data connection boxes.
Art. No. 0214, 0215 (Cat 3), 0220/12-507, 0221/12-507, 0218, 0217 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
Brand-Rex (WAEGV 8/8 EKR/EK).
AMP (NETCONNECT 5E).
BTR (E-DAT C6, E-DAT design, Universal data connecting unit design and IAE design).
cti (cti-wire 2.8 Cat.6).
Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.
With labelling field.
Size of labelling field: 60 x 9 mm.

Colour	Type	Order code	Pack/Qty.
anthracite	**1803-02-81**	2CKA001710A3615	10
ivory white	**1803-02-82**	2CKA001710A3146	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter.
For loudspeaker connection box.
USB power adapter insert 6475 U-500.
Suitable for part number 0248/0x-101.
For data modules.
Suitable for Art. No. 0219/12 and 0219/13.
For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).

Colour	Type	Order code	Pack/Qty.
anthracite	**1766-81**	2CKA001710A3613	10
ivory white	**1766-82**	2CKA001710A3144	10/100

Cover plate [1] [2]

As cover for standard Radio/TV/SAT socket outlets
With 2 connectors
Acc. to German Standard DIN 45330.
Radio/TV/SAT.
With M3 fixing screw.

Colour	Type	Order code	Pack/Qty.
anthracite	**1743-81**	2CKA001724A4252	10
ivory white	**1743-82**	2CKA001724A2758	10

[1] Third opening can be knocked out.
[2] See inserts for satellite coaxial socket outlets.

Cover plate [1] with labelling field

For modular jack with slide entrance.
To fit only Art. No. 1810, 1812, 1814, 1816, 1818, 1819 and 1820.
Size of labelling field: 60 x 9 mm.

Colour	Type	Order code	Pack/Qty.
anthracite	**1800-81**	2CKA001710A3627	10
ivory white	**1800-82**	2CKA001710A3158	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Intermediate ring

For fitting cover plates from the Busch-Duro 2000® SI and Reflex SI range.

Colour	Type	Order code	Pack/Qty.
ivory white	**1747 SI-82**	2CKA001710A3862	10

Intermediate ring with hinged lid [1] Busch-balance® SI

For attaching cover plates from the Busch-balance® SI range.
Delivery without cover plate.
With sealing ring.
With hinged lid.
Protection class (Device): IP 44
Dimensions: (L x W x D): 63 mm x 63 mm x 20 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**2518-WD-81**	2CKA001719A0217	10
ivory white	**2518-WD-82**	2CKA001719A0218	10

[1] Combinable only with covers for flush-mounted inserts

Cover plate with hinged lid

For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.

Colour	Type	Order code	Pack/Qty.
anthracite	**1746-81**	2CKA001710A3618	10
ivory white	**1746-82**	2CKA001710A3149	10

Busch-dynasty®

Multimedia / communication adapters

Busch-Radio DAB+ [1])

DAB+ and RDS stereo radio alarm clock for flush-mounted installation. With high-resolution colour display for showing additional information.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation. 8 radio stations storable.
With time and date display. With individual alarm and snooze function. With automatic switch-off function (automatic sleep mode). With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Control/Signal outputs: 2, Loudspeaker output, impedance 4 Ohm
Rated power: 2 W (RMS)

Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8215 U-101-500	2CKA008200A0276	1/10

[1]) No claw. Screw-fixing via keyholes.

Busch-Radio BTconnect DAB+ [1]) with Bluetooth interface for music replay.

DAB+ and RDS stereo radio alarm clock for flush-mounted installation. With high-resolution colour display for showing additional information. With Bluetooth interface for music replay of mobile devices.
Connection of external Bluetooth loudspeakers possible.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation. 8 radio stations storable.
With time and date display. With individual alarm and snooze function. With automatic switch-off function (automatic sleep mode). With extension input to remote-controlled ON/OFF switches. With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Bluetooth specification: 4.2.
Bluetooth profiles supported: A2DP
Number of stored Bluetooth connections: max. 8
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 2 W (RMS)

Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Bluetooth

Colour	Type	Order code	Pack/Qty.
	8217 U-101-500	2CKA008200A0279	1/10

[1]) No claw. Screw-fixing via keyholes.

Loudspeaker insert [1]) 5 cm (2")

With flat plug connector.
With broadband characteristics.
Rated output: 2 W (RMS)
Incl. speaker connection cable.
Frequency response: 200 - 20,000 Hz
Impedance: 4 Ohm
Protection class (Device): IP 20, SELV
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1/10

[1]) No claw. Screw-fixing via keyholes.

Flush Mounted Inserts Flush-mounted installation boxes and inserts

Multi media connector ins.

Colour	Type	Order code	Pack/Qty.
	8231 U	2CKA008200A0223	1/10

USB power adapter insert, flush-mounted [1]) [2]) With USB-A & USB-C interface

For supply and support of mobile devices via USB-cable.
With USB type A and USB type C female connector.
To support two devices at the same time.
Supports automatic negotiating of optimum charging parameters for the shortest charging times.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Outputs: 2x USB charging interface
Suitable for: Only USB-A bus occupied:
Rated current: 3000 mA
Output voltage: 5 V-
Suitable for: Only USB-C bus occupied:
Rated power: 18 W

Suitable for: USB-A and USB-C bus occupied. Total:
Rated current: 3250 mA
Output voltage: 5 V-
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

[1]) No claw. Screw-fixing via keyholes.
[2]) No data transfer.

Busch-dynasty®

Multimedia / communication adapters

65 W power adapter insert, flush-mounted [1] [2] with USB-C interface

NEW

For power and charge of mobile devices via USB-C cable.
With USB type C female connector. Supports high power and automatic negotiating of optimum charging parameters for the shortest charging times.
Support of charging protocols: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the Qualcomm quick charge protocols: QC 2.0, 3.0, 4.0 and 5.
Support of USB PD (power delivery): 3.1 incl. PPS (programmable power supply).
Support of manufacturer specific protocolls: Samsung AFC and Huawei FCP (with 20 W).
With electronic short-circuit protection.
With electronic overload protection.
Fitting cover plate: 6479-...-500.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Power loss: < 75 mW
Outputs: 1x USB-C charging interface
Rated power: 65 W
Output voltage: 5 V, 9 V, 12 V, 15 V, 20.0 V DC
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 44 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6479 U-500	2CKA006400A0437	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.

HDMI connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link high-definition digital audio and video data from e.g. SAT-receiver, DVD-/Blue-Ray-player to plasma-type, LCD- or-LED-TVs/screens.
HDMI-type A, 3D-compatible.
Fully HD ready (1920 x 1080 pixel).
For 20-wire HDMI-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/31-500**	2CKA000230A0430	1
grey	**0261/33-500**	2CKA000230A0432	1
alpine white	**0261/32-500**	2CKA000230A0431	1

[1] Please follow the recommendations of the cable and device producers for the max. HDMI cable lengths.

VGA connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link analogue video data between PCs and laptops to monitors or digital projectors etc.
VGA-type: D-type, 15-pole.
Fully HD ready (1920 x 1080 pixel).
For 15-wire VGA-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/21-500**	2CKA000230A0424	1
grey	**0261/23-500**	2CKA000230A0426	1
alpine white	**0261/22-500**	2CKA000230A0425	1

[1] Please follow the recommendations of the cable and device producers for the max. VGA cable lengths.

USB connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link mobile devices like e.g. printer, scanner, USB-sticks or digital cameras etc.
USB-type A, USB 2.0 compatible.
For 5-wire USB- cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/11-500**	2CKA000230A0418	1
grey	**0261/13-500**	2CKA000230A0420	1
alpine white	**0261/12-500**	2CKA000230A0419	1

[1] Please follow the recommendations of the cable and device producers for the max. USB cable lengths.

Communication adapter for BNC-F Duct-jacks

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0262/11-500**	2CKA000230A0436	1
grey	**0262/13-500**	2CKA000230A0438	1
alpine white	**0262/12-500**	2CKA000230A0437	1

Busch-dynasty®

Multimedia / communication adapters

F duct-jack for communication adapter

For connection of antenna cables e.g.. for TVs with integrated TV-tuner and satellite receiver.
With screw-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**0262-500**	2CKA000230A0440	1

Communication adapter for Cinch-jacks

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0263/11-500**	2CKA000230A0444	1
grey	**0263/13-500**	2CKA000230A0446	1
alpine white	**0263/12-500**	2CKA000230A0445	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked white: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
alpine white	**0263/04-500**	2CKA000230A0451	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked black: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
black	**0263/05-500**	2CKA000230A0452	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked red: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Red	**0263/06-500**	2CKA000230A0453	1

Cinch-jacks for communication adapter

For connecting analogue video devices, such as DVD players, hard disc recorders, video recorders or receivers.
Marked yellow: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
yellow	**0263/07-500**	2CKA000230A0454	1

Communication adapter for Mini-jacks 3,5mm

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0264/11-500**	2CKA000230A0458	1
grey	**0264/13-500**	2CKA000230A0460	1
alpine white	**0264/12-500**	2CKA000230A0459	1

Mini-jack 3,5 mm for communication adapter

For the connection of mobile terminal devices such as MP3 player (stereo), mobile telephone and smartphones.
Audio-band 20Hz - 20kHz.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
chrome gloss	**0264-500**	2CKA000230A0462	1

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back).
With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color. With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0248/02-101**	2CKA000230A0402	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back).
With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Busch-dynasty®

Multimedia / communication adapters

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back).
With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color. With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**0248/05-101**	2CKA000230A0404	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Cover plate

For Busch-Radio DAB+ 8215 U-101.
For Busch-Radio BTconnect DAB+ 8217 U-101.
For Busch-Radio iNet 8216 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**8252-81-101-500**	2CKA008200A0249	10
ivory white	**8252-82-101-500**	2CKA008200A0251	10

Cover plate

For loudspeaker insert 8223 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**8253-81**	2CKA008200A0078	1/10
ivory white	**8253-82**	2CKA008200A0079	1/10

CoverPlates (partly incl. Insert) Hotel application

FC-plate media connector.

Colour	Type	Order code	Pack/Qty.
anthracite	**8256-81**	2CKA008200A0227	1/10
ivory white	**8256-82**	2CKA008200A0229	1/10

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter. For loudspeaker connection box.
USB power adapter insert 6475 U-500.
Suitable for part number 0248/0x-101.
For data modules. Suitable for Art. No. 0219/12 and 0219/13. For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).

Colour	Type	Order code	Pack/Qty.
anthracite	**1766-81**	2CKA001710A3613	10
ivory white	**1766-82**	2CKA001710A3144	10/100

Cover plate for power adapter insert

NEW

Cover plate for USB-C 65 W power adapter 6479 U-500.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**6479-81-500**	2CKA006400A0444	1
ivory white	**6479-82-500**	2CKA006400A0446	1

Cover plate for Busch-powerDock

END OF LIFE

For Busch-powerDock charging cradle.

Colour	Type	Order code	Pack/Qty.
anthracite	**6477-81**	2CKA006400A0056	10
ivory white	**6477-82**	2CKA006400A0057	10

Busch-dynasty®
Room thermostats

Room thermostat, flush-mounted [1] [2] [3]

END OF LIFE

Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0512	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Slide switch

END OF LIFE

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 U-500	2CKA001032A0514	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Sliding switch, 24 V

END OF LIFE

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~
Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 U	2CKA001032A0485	1
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] 1gang 2way

END OF LIFE

With fixing claws.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 U-101-500	2CKA001032A0513	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Busch-dynasty®
Room thermostats

Room thermostat, flush-mounted [1] [2] [3]
Actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 UTA	2CKA001032A0487	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Sliding switch, actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached.
With built-in slide switch and control lamp for nightly reduction of 4 K.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UTA	2CKA001032A0488	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Sliding switch, actual value indication, 24 V

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached. With built-in slide switch and control lamp for nightly reduction of 4 K. With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~
Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 UTA	2CKA001032A0489	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Change-over contact, actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
With fixing claws. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 UTA	2CKA001032A0490	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Change-over contact, setpoint indication, timer

END OF LIFE

With change-over contact.
Easy adjustment using menu and text-based display.
4 switching times per day can be user-defined for each day of the week. With fixing claws.
Automatic summer/wintertime switch-over
Power reserve > 10 hours. To fit cover plate 6435-xxx.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 U-101	2CKA001032A0508	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Busch-dynasty®
Room thermostats

Room thermostat, flush-mounted [1]) Remote sensor

END OF LIFE

With remote sensor and thermal feedback
For underfloor heating.
With built-in slide switch and control lamp for nightly reduction of 4 K. Switch contact opens when the set temperature is reached. With fixing claws.
Remote sensor cable length: 4 m.
Sensor =NTC, 10 kilo-ohm at 25 degrees C.
Adjusting range: +10 to +50° C.
Connecting cable: 1mm² to 2.5 mm²
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 16 A, cos ϕ 1
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UF	2CKA001032A0497	1/10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Room thermostat, flush-mounted [1]) [2]) [3]) 1gang 2way

END OF LIFE

With fixing claws. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 5 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 U-500	2CKA001032A0513	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.
[3]) Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1]) [2]) Change-over contact, setpoint indication, timer, remote sensor

END OF LIFE

With change-over contact. Easy adjustment using menu and text-based display. 4 switching times per day can be user-defined for each day of the week. With fixing claws. Automatic summer/wintertime switch-over. Remote sensor cable length: 4 m. Sensor =NTC, 10 kilo-ohm at 25 degrees C. Power reserve > 10 hours. To fit cover plate 6435-xxx. Class of temperature controller 1.
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 16 A. Temperature range (Device): 10 °C to 50 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 UF-101	2CKA001032A0509	1/10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.

Cover plate for room thermostat

For room thermostats 1094 U/UF, 1097 U/UF.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1794-81**	2CKA001710A3629	10
ivory white	**1794-82**	2CKA001710A3543	10

Cover plate for room thermostat

END OF LIFE

With sliding switch for nightly room temperature reduction.
to activate nighttime mode and reduction of room temperature by 4K, for thermostats 1095 U, 1096 U and 1095 UF.

Colour	Type	Order code	Pack/Qty.
anthracite	**1795-81**	2CKA001710A3630	10
ivory white	**1795-82**	2CKA001710A3568	10

NEW

Room Thermostat

Electronic room thermostat, open contact, fm
Normally open contact, non-isolated
Switch contact opens when the set temperature is reached. Without fixing claws.
Separate terminal to activate eco mode to reduce the room temperature by 3K. See respective cover plates 1794 R-xx. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Power dissipation: ≤ 0,15 W
Rated current: 10 A. Temperature range (device): 5 °C - 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm. Protection class device: IP 20
Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete. Servo-valves, "de-energised open", are necessary for connection to thermostat. e.g. Article No. 6164/10-102. Switching temperature difference: ± 0.5 K

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0525	1/10
	1097 U-101-500	2CKA001032A0528	1/10
	1099 UHK-101-500	2CKA001032A0531	1/10

NEW

Cover Plate Thermostat Turn button - 63x63

C-plate for room thermostats 1094 U-101, 1097 U-101, 1099 U-101.

Colour	Type	Order code	Pack/Qty.
anthracite	**1794 R-81**	2CKA001710A4198	10
ivory white	**1794 R-82**	2CKA001710A4199	10

Busch-dynasty®

Room thermostats

RTC Room Temperature Controller

NEW



Room Temperature Controller for Room thermostat Bluetooth with Setpoint display, Timer and Remote control Button 230 V

Colour	Type	Order code	Pack/Qty.
	1095 UTA-BT-500	2CKA001032A0534 Insert - Bluetooth	1
	1094 USITA-BT-500	2CKA001032A0536 Insert - Bluetooth	1
	1096 UTA-BT-500	2CKA001032A0538 Insert - Bluetooth	1
	1099 UHKTA-BT-500	2CKA001032A0540 Insert - Bluetooth	1
	62841 U-WL-500	2CKA006800A3115 Insert - free@home	1
	62842 U-WL-500	2CKA006800A3117 Insert - free@home	1
	62843 U-WL-500	2CKA006800A3119 Insert - free@home	1

Cover Plate, Thermostat Various symbols for Thermostat anthracite - Platform 63

NEW

Central plate with print for room temperature controller with display/Bluetooth or free@home wireless
For room temperature controller with display:
1094 USITA-BT - 1095 UTA-BT - 1096 UTA-BT - 1099 UHKTA-BT - 62841 U-WL - 62842 U-WL - 62843 U-W

Colour	Type	Order code	Pack/Qty.
anthracite	**1794 MDRT-81**	2CKA006430A0417	10
ivory white	**1794 MDRT-82**	2CKA006430A0418	10

LED light

Info light unit [1] [2]

Size of information field 43 x 43 mm.
Long service life of the lighting element (LEDs).
Homogeneous backlighting of the information field.
Colour temperature 6,500 K (cold white)
Power consumption: < 0.5 W
Rated voltage: 230 V~
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2062 U	2CKA001511A0115	1/10

[1] Use relay inserts when switching through movement sensors or comfort switches.
[2] For switching the LED flush mounted insert use switches without orientation light only.

Cover plate [1] [2]

As cover for flush-mounted info light.
For insert 2062 U.
Size of information field 43 x 43 mm.

Colour	Type	Order code	Pack/Qty.
anthracite	**1716-81**	2CKA001731A1921	1
ivory white	**1716-82**	2CKA001731A1922	1

[1] Included with the cover are 46 different text labels and symbols.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Cap for indication lamp

For indication lamps.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
clear-transparent	**1565-11**	2CKA001565A0167	10
Red	**1565-12**	2CKA001565A0175	10
green	**1565-13**	2CKA001565A0183	10

Busch-dynasty®

KNX control elements

Control element, 1/2gang [1] [2] multi-function/colour concept

For ABB i-bus® KNX 6120/12-101, 6120/13.
With labelling field.
Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green.
Push switch function: switching / dimming / blind / sending values / scenes etc.
Transparent labelling sheet with standard symbols included in delivery.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: rocker switch left/right
Display elements: Two LED per rocker via separate communication object for status (Red/ Green/ OFF) or orientation light.
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**6125/02-81-500**	2CKA006115A0216	1
ivory white	**6125/02-82-500**	2CKA006115A0217	1

[1] For software and description please check the current Online-Catalogue.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Control element, 2/4gang [1] [2] multi-function/colour concept

For ABB i-bus® KNX 6120/12-101, 6120/13.
With labelling field.
Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green.
Push switch function: switching / dimming / blind / sending values / scenes etc.
Transparent labelling sheet with standard symbols included in delivery.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: rocker switch left/right
Display elements: Two LED per rocker via separate communication object for status (Red/ Green/ OFF) or orientation light.
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**6126/02-81-500**	2CKA006116A0206	1
ivory white	**6126/02-82-500**	2CKA006116A0207	1

[1] For software and description please check the current Online-Catalogue.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Control element, 4/8gang [1] [2] multi-function/colour concept

For ABB i-bus® KNX 6120/12-101, 6120/13.
With labelling field.
Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green.
Push switch function: switching / dimming / blind / sending values / scenes etc.
Transparent labelling sheet with standard symbols included in delivery.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: rocker switch left/right
Display elements: Two LED per rocker via separate communication object for status (Red/ Green/ OFF) or orientation light.
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**6127/02-81-500**	2CKA006117A0232	1
ivory white	**6127/02-82-500**	2CKA006117A0233	1

[1] For software and description please check the current Online-Catalogue.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Busch-Watchdog 180 flush-mounted standard sensor [1]

For ABB i-bus® KNX 6120/12-101, 6120/13.
Movement detector with up to 4 channels.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Detection range: frontal: 6 m, lateral: 6 m
Detection angle: 180 °
Brightness limit value: 5 Lux - 150 Lux
Mounting height: 1.1 m
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 18 mm
Position for installation: vertical

Colour	Type	Order code	Pack/Qty.
	with select-lens [2] [*]		
anthracite	**6122/01-81-500**	2CKA006132A0272	1
ivory white	**6122/01-82-500**	2CKA006132A0273	1
	with integrated bus coupler		
anthracite	**6122/10-81-500**	2CKA006132A0376	1
ivory white	**6122/10-82-500**	2CKA006132A0377	1

[1] For software and description please check the current Online-Catalogue.
[2] For compatible cover frames, see the following ranges: carat®, pure stainless steel, solo®, Busch-axcent® or future® linear. [*] Phase-out type

Cover plate for room temperature controller or room temperature controller with CO2/moisture

As cover for room temperature controller with/without CO2/moisture sensor (6109/18 and 6109/28).
Protection class (Device): none

Colour	Type	Order code	Pack/Qty.
anthracite	**6109/03-81-500**	2CKA006155A0060	10
ivory white	**6109/03-82-500**	2CKA006155A0061	10

Busch-dynasty®
Accessories

Extension of claws [1])

For the installation of flush-mounted SCHUKO® socket outlets and also switches, push-buttons, etc. and deeply installed flush-mounted boxes.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2148	2CKA002148A0120	100

[1]) Not suitable for types 2000/3 US, 2000/6/2 US, 2000/6/6 US-101 and double socket outlets.

Braille symbol

Self-adhesive (transparent) for cover 2506-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	light		
	2144 LI	2CKA001714A0295	10/1000
	bell		
	2144 KI	2CKA001714A0296	10/1000
	key		
	2144 TR	2CKA001714A0297	10/1000

Braille symbol socket outlet

Self-adhesive, transparent for SCHUKO® socket outlets with hinged lid 20 EUK-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2144 ST	2CKA001714A0298	10/1000

DIN A 4 labelling sheet [1]) plastic foil

Suitable for all to be labeled Busch-Jaeger devices.
For laser printer.
The text of the foil is printed via the Busch-Jeager labeling service.
Dimensions: (L x W x D): 297 mm

Colour	Type	Order code	Pack/Qty.
translucent	**1799/02**	2CKA001799A0959	1
transparent	**1799/03**	2CKA001799A0960	1

[1]) 1 piece = 1 sheet.

RC suppressor

For protection against the damage or destruction of electronic devices due to overvoltages.
For wiring network-interconnected inductivities (e.g.. relay, protection, fluorescent lamps, transformers, etc.).
Eliminates functional disturbances on electronic devices, e.g. automatic circuit reclosure (clocking) of a movement detector.
Dimensions: diameter 25 mm, length 35 mm, length of the connecting cable approx. 100 mm.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz

Colour	Type	Order code	Pack/Qty.
	6899	2CKA006899A0231	10

Busch-dynasty®
Cover frames

Cover frame 1gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 106 mm x 106 mm x 12 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**1721-831-500**	2CKA001754A4605	10
ivory white	**1721-832-500**	2CKA001754A4600	10
polished brass decor anthracite [1]	**1721-833-500**	2CKA001754A4575	1
polished brass anthracite [1]	**1721-835-500**	2CKA001754A4565	1
polished brass decor ivory white [1]	**1721-836-500**	2CKA001754A4570	1
polished brass ivory white [1]	**1721-838-500**	2CKA001754A4560	1
antique brass decor anthracite [2]	**1721-843-500**	2CKA001754A4595	1
antique brass anthracite [2]	**1721-845-500**	2CKA001754A4585	1
antique brass decor ivory white [2]	**1721-846-500**	2CKA001754A4590	1
antique brass ivory white [2]	**1721-848-500**	2CKA001754A4580	1

[1] Real metal surface. [2] Real metal surface refined by hand.

Cover frame 2gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 177 mm x 106 mm x 12 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**1722-831-500**	2CKA001754A4606	10
ivory white	**1722-832-500**	2CKA001754A4601	10
polished brass decor anthracite [1]	**1722-833-500**	2CKA001754A4576	1
polished brass anthracite [1]	**1722-835-500**	2CKA001754A4566	1
polished brass decor ivory white [1]	**1722-836-500**	2CKA001754A4571	1
polished brass ivory white [1]	**1722-838-500**	2CKA001754A4561	1
antique brass decor anthracite [2]	**1722-843-500**	2CKA001754A4596	1
antique brass anthracite [2]	**1722-845-500**	2CKA001754A4586	1
antique brass decor ivory white [2]	**1722-846-500**	2CKA001754A4591	1
antique brass ivory white [2]	**1722-848-500**	2CKA001754A4581	1

[1] Real metal surface. [2] Real metal surface refined by hand.

Busch-dynasty®
Cover frames

Cover frame 3gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 248 mm x 106 mm x 12 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**1723-831-500**	2CKA001754A4607	5
ivory white	**1723-832-500**	2CKA001754A4602	5
polished brass decor anthracite [1]	**1723-833-500**	2CKA001754A4577	1
polished brass anthracite [1]	**1723-835-500**	2CKA001754A4567	1
polished brass decor ivory white [1]	**1723-836-500**	2CKA001754A4572	1
polished brass ivory white [1]	**1723-838-500**	2CKA001754A4562	1
antique brass decor anthracite [2]	**1723-843-500**	2CKA001754A4597	1
antique brass anthracite [2]	**1723-845-500**	2CKA001754A4587	1
antique brass decor ivory white [2]	**1723-846-500**	2CKA001754A4592	1
antique brass ivory white [2]	**1723-848-500**	2CKA001754A4582	1

[1] Real metal surface. [2] Real metal surface refined by hand.

Cover frame 4gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 319 mm x 106 mm x 12 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**1724-831-500**	2CKA001754A4608	1
ivory white	**1724-832-500**	2CKA001754A4603	1
polished brass decor anthracite [1]	**1724-833-500**	2CKA001754A4578	1
polished brass anthracite [1]	**1724-835-500**	2CKA001754A4568	1
polished brass decor ivory white [1]	**1724-836-500**	2CKA001754A4573	1
polished brass ivory white [1]	**1724-838-500**	2CKA001754A4563	1
antique brass decor anthracite [2]	**1724-843-500**	2CKA001754A4598	1
antique brass anthracite [2]	**1724-845-500**	2CKA001754A4588	1
antique brass decor ivory white [2]	**1724-846-500**	2CKA001754A4593	1
antique brass ivory white [2]	**1724-848-500**	2CKA001754A4583	1

[1] Real metal surface. [2] Real metal surface refined by hand.

Cover frame 5gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 390 mm x 106 mm x 12 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**1725-831-500**	2CKA001754A4609	1
ivory white	**1725-832-500**	2CKA001754A4604	1
polished brass decor anthracite [1]	**1725-833-500**	2CKA001754A4579	1
polished brass anthracite [1]	**1725-835-500**	2CKA001754A4569	1
polished brass decor ivory white [1]	**1725-836-500**	2CKA001754A4574	1
polished brass ivory white [1]	**1725-838-500**	2CKA001754A4564	1
antique brass decor anthracite [2]	**1725-843-500**	2CKA001754A4599	1
antique brass anthracite [2]	**1725-845-500**	2CKA001754A4589	1
antique brass decor ivory white [2]	**1725-846-500**	2CKA001754A4594	1
antique brass ivory white [2]	**1725-848-500**	2CKA001754A4584	1

[1] Real metal surface. [2] Real metal surface refined by hand.

pure stainless steel
Lasts a lifetime.

Fascinatingly bold straight lines in a time proof material. It is pure stainless steel. Fingerprints? It is impossible, thanks to the unique finishing. An accord of aesthetics, functions and durability. Absolute quality. Pure stainless steel is simply permanent.

01 Switch/push-switch
02 2gang-1way/2way switch
03 Busch-Blind control switch
04 Busch-Comfort switch
05 20A double pole switch with marking and indicator
Colour: stainless steel

Materials
The series is surface-coated in a special manufacturing process. This means that fingerprints or other greasy spots are reduced to a minimum (anti-fingerprint).

ANTI FINGERPRINT

pure stainless steel

Selected functions.

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20

21

01 Rocker switch 1gang
02 Rocker switch 2gang
03 Busch Universal Rotary Dimmer
04 Touch dimmer
05 Busch-Comfort switch
06 Busch-steplight®
07 Busch-Protector® SCHUKO® socket outlet with overvoltage protection
08 SCHUKO® USB socket outlet, USB A&C
09 Socket outlet with earthing pin
10 Switched socket outlet BS standard
11 Blind switch with rotary knob
12 Busch-Blind control switch with semi-cylindrical lock
13 Busch-Blind comfort switch
14 Comfort timer
15 Room thermostat with display
16 Busch-Radio DAB+
17 Loudspeaker insert
18 Antenna socket for radio/TV/satellite
19 Universal data connection box
20 Stereo loudspeaker connecting box
21 KNX sensor, for more KNX products see part 12 of the catalogue - Intelligent Building Solutions

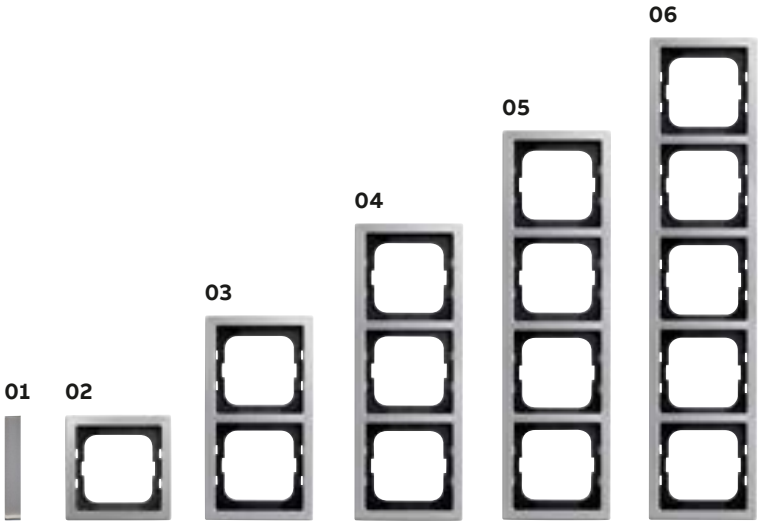

1 to 5gang cover frame for horizontal and vertical installation.
01 Side view, 11 mm x 80 mm
02 80 mm x 80 mm
03 80 mm x 151 mm
04 80 mm x 222 mm
05 80 mm x 293 mm
06 80 mm x 364 mm

For more information about light switch ranges visit ABB global web sites.

pure stainless steel

Rocker switches / push switches

Rocker Switch Mechanism [1]



Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way		
	2000/6 US-500	2CKA001012A2198	10/100
	2gang 1way		
	2000/5 US-500	2CKA001012A1150	10/100
	DP, 1gang 2way [2]		
	2000/6/2 US	2CKA001012A0954	10
	1gang		
	2000/7 US-500	2CKA001012A2199	10/100
	DP, 1gang 1way		
	2000/2 US-500	2CKA001012A2196	10/100
	SP, 1gang 1way switch		
	2000/1 US-500	2CKA001012A2059	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1]

Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	Switch-off and two-way circuit 16 A		
	2400/6 US-500	2CKA001012A2232	10/100
	2gang switch 16 A		
	2400/5 US-500	2CKA001012A2234	10
	1gang intermediate 16 A		
	2400/7 US-500	2CKA001012A2236	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1] 2gang 2way

With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/6/6US-101-500	2CKA001011A0928	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]
Changeover/changeover circuit 16 A

With screwless terminals.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6/6US-101-500	2CKA001022A0663	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1] [2] DP, 1gang 1way



For switching high loads.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/2 US-101-500	2CKA001012A2193	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Also for switching SCHUKO® socket outlets.

Rocker Switch Mechanism [1] [2] 3-pole, 1gang 1way switch

Rated voltage: 400 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/3 US	2CKA001011A0816	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism, control [1]
2gang switch with N-clamp 16 A



With LED.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/5 USK-500	2CKA001012A2238	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

pure stainless steel

Rocker switches / push switches

Rocker Switch Mechanism [1]

With neon lamp.
Rated voltage: 250 V~. Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way [2]		
	2000/6 USGL-500	2CKA001012A2194	10/100
	2gang 1way		
	2000/5 USGL	2CKA001012A1135	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.

Rocker Switch Mechanism, control [1] [2] [3]

With neon lamp.
Rated voltage: 250 V~. Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way with N-terminal		
	2000/6 USK-500	2CKA001022A0659	10/100
	DP, 1gang 1way		
	2000/2 UK	2CKA001022A0656	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Rocker Switch Mechanism, control [1] [2] [3]
Switch-off and two-way circuit with N-clamp 16 A

With neon lamp.
Rated voltage: 250 V~. Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6 USK-500	2CKA001022A0661	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-500	2CKA001413A0574	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With 2 independent signalling contacts.
Rated voltage: 250 V~
Inputs: 1.
Outputs: 1
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-201	2CKA001413A0483	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1] [2] [3]
SP, with normally open contact (operating current)

With illumination.
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 USGL-500	2CKA001413A1106	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.
[3] For relay and touch dimmer applications.

Push-switch mechanism [1]

With one input terminal and 2 actuating covers.
Rated voltage: 250 V~
Inputs: 1.
Outputs: 2x Normally open contact
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-205-500	2CKA001413A1105	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1] SP, 1gang 2way



Can be wired for normally open contacts (stand-by current) or normally closed contacts (operating current).
With N terminal.
Rated voltage: 250 V~.
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-206-500	2CKA001413A1104	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

pure stainless steel

Rocker switches / push switches

Rocker

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1786-866-500**	2CKA001751A3077	10/100

Rocker

For flush-mounted switch 2g 1w, 2g push switch.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1785-866-500**	2CKA001751A3087	10/100

Rocker

As a cover for flush-mounted control 2gang switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1785 K-866**	2CKA001751A3132	10

Rocker with small transparent lens

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1789 N-866**	2CKA001751A3152	10/100

Rocker with small red spherical cap

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1789-866**	2CKA001751A2957	10/100

Switch rocker with marking with small transparent lens

With >Plug< icon.
As cover for flush-mounted switch 1g1w DP and 3pole with neon lens and marking "I O"
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1789 ST-866**	2CKA001751A3162	10/100

Switch rocker with marking light

With >Light< icon.
For flush-mounted switch 1g1w, 1g2w, intermediate, push switch. Material stainless steel.
Anti fingerprint. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2520 LI-866**	2CKA001751A3191	10/100

Switch rocker with marking key

With >Key< icon.
For flush-mounted push switch.
Material stainless steel. Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2520 TR-866**	2CKA001751A3200	10/100

Switch rocker with marking bell

With >Bell< icon.
For flush-mounted push switch.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2520 KI-866**	2CKA001751A3181	10/100

Switch rocker with marking with small transparent lens

With >Light< icon.
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1789 LI-866**	2CKA001751A2958	10

pure stainless steel

Rocker switches / push switches

Switch rocker with marking with small transparent lens

With >Bell< icon.
For flush-mounted push switch.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1789 KI-866**	2CKA001751A2959	10

Switch rocker with marking with small transparent lens

With >Key< icon.
For flush-mounted push switch.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1789 TR-866**	2CKA001751A2960	10

Switch rocker with marking with small red spherical cap

With imprint >0< and >I<.
As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1788-866**	2CKA001751A2961	10

Rocker [1] [2] with labelling field

With pilot lamp for uniform illumination of the labelling field.
For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Size of labelling field: 59.7 x 11.7 mm.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1764 NLI-866**	2CKA001731A1953	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Illumination using neon lamp 8353 or incandescent lamp 8344-1 and LED inserts.

Rocker [1] [2] with labelling field

With >Bell< icon.
With pilot lamp for uniform illumination of the labelling field.
For flush-mounted push switch.
Size of labelling field: 59.7 x 11.7 mm.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1764 NLI/KI-866**	2CKA001731A4003	10/100

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Illumination using neon lamp 8353 or incandescent lamp 8344-1 and LED inserts.

Switch rocker with marking with small red spherical cap

With >Heating< imprint.
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch.
Material stainless steel. Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1789 H-866**	2CKA001751A2963	10

CoverPlates (partly incl. Insert) Hotel application

Rocker el. push-switch.

Colour	Type	Order code	Pack/Qty.
stainless steel	**2570-10-866**	2CKA001751A3265	10

CoverPlates (partly incl. Insert) Hotel application

Rocker 2g el. push-switch.

Colour	Type	Order code	Pack/Qty.
stainless steel	**2570-20-866**	2CKA001751A3276	10

CoverPlates (partly incl. Insert) Hotel application

Rocker 3g el. push-switch.

Colour	Type	Order code	Pack/Qty.
stainless steel	**2570-30-866**	2CKA001751A3287	10

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

El. push-switch insert.

Colour	Type	Order code	Pack/Qty.
black	**2051 U**	2CKA001413A1115	10

pure stainless steel

Rocker switches / push switches

Flush Mounted Inserts Black

El. push-switch insert 2g.

Colour	Type	Order code	Pack/Qty.
black	**2052 U**	2CKA001413A1116	10

Flush Mounted Inserts Black

El. push-switch ins. 3g.

Colour	Type	Order code	Pack/Qty.
black	**2053 U**	2CKA001413A1117	10

Cover plate

For card switch. For insert 2025 U.
Suitable for cards sized 54 x 86 mm.
The inner part of the cover plate is made of light-conducting plastic, so that the card slot is illuminated.
Material stainless steel. Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1792-866**	2CKA001710A3757	10

Card switch 10 A [1])
SP, with normally open contact (operating current)



Illuminable.
With N terminal.
Rated voltage: 250 V~, Rated current: 10 A
Suitable for: LEDi / CFLi
Rated power: 100 W, Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2025 U	2CKA001012A1713	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
delivery form:	Adapter plate APBS to be ordered separate.		

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

CoverPlates (partly incl. Insert) Hotel application

C-plate, card switch RFID.

Colour	Type	Order code	Pack/Qty.
stainless steel	**1792 RFID-866**	2CKA001710A4134	10

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

Card switch insert RFID.

Colour	Type	Order code	Pack/Qty.
stainless steel	**2025 RFID U**	2CKA001012A2242	10

Switch rocker with marking

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
DO NOT DISTURB
Material stainless steel.
Anti fingerprint. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1786/11-866**	2CKA001751A3002	10

Switch rocker with marking

For flush-mounted switch 2g 1w, 2g push switch.
DO NOT DISTURB
MAKE UP ROOM
Material stainless steel.
Anti fingerprint. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1785/11-866**	2CKA001751A2996	10

Switch rocker with marking

As cover for flush-mounted rocker control switch insert, DND/MUR.
DO NOT DISTURB
MAKE UP ROOM
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1785/11 K-866**	2CKA001751A3216	10

pure stainless steel

Rocker switches / push switches

Rocker switch insert DND/MUR [1]



With LED.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028 UK	2CKA001012A2240	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker switch insert DND/MUR [1]



With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028/12 UK	2CKA001012A2241	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Flush Mounted Inserts

El. push-switch DND/MUR

Colour	Type	Order code	Pack/Qty.
	2058 UK	2CKA001413A1114	10/100

Bell push-switch DND/MUR 230 V [1] [2]

With LED
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
stainless steel	**2029 UC-866**	2CKA001751A3171	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Surface painted.

Bell push-switch DND/MUR 24 V [1] [2]

With LED
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
stainless steel	**2029/12 UC-866**	2CKA001751A3238	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker DND/MUR el. p.-swit

Colour	Type	Order code	Pack/Qty.
stainless steel	**2058-24-866**	2CKA001751A3227	1

Pull switch [1] SP, with normally open contact (operating current)

With 2-metre pull cord, red handle, and red neon indicator.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	2020/01 US	2CKA001413A1077	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Pull switch [1] SP, break contact

With 2-metre pull cord, red handle, and red neon indicator.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	2020/10 US	2CKA001413A1076	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

pure stainless steel

Rocker switches / push switches

Rocker open for red pull switch neon indicator

For pull switch 2020/xx US.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1720-866**	2CKA001731A1954	10

Three-step rotary switch [1] [2] SP, with zero position

With zero position.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710 U	2CKA001101A0918	1/10

[1] Install only in conjunction with wall boxes ø 60 mm.
[2] Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Three-step rotary switch [1] [2] SP, without zero position

Without zero position.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710/1 U	2CKA001101A0919	1/10

[1] Install only in conjunction with wall boxes ø 60 mm.
[2] Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Cover plate with rotary control, with marking

As cover for flush mounted three-step rotary switch.
With zero position.
For insert 2710 U.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2542 DR/01-866**	2CKA001710A3758	10

Cover plate with rotary control, with marking

As cover for flush mounted three-step rotary switch.
Without zero position.
For insert 2710/1 U.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2542 DR/02-866**	2CKA001710A3759	10

Cover plate [1] for pull switch 2610/6 UC-xx, 2610/6 UJ-xx

With screw-type terminal
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1796-866**	2CKA001753A0312	10

[1] Exchanging the available cover/cover plate.

Smart Switch, WL NEW

Smarter light-/blind switch for wireless control of Busch-flexTronics® wireless and Busch-free@home® devices.
Wall-mounted transmitter, 2/4 channels.
Operation in ABB-flexTronics® wireless with up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required.
Programming with the ABB-free@home® Next App.
Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.
Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.

Colour	Type	Order code	Pack/Qty.
	62721 U-WL-500	2CKA006710A0048	1

pure stainless steel

Dimmers

Friends of Hue smart switch insert
Wall-mounted transmitter, 2 / 4 channel

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx.
Smarter light switches for wireless remote control of Philips Hue lamps. For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology.
Combinable with the Busch-Jaeger switch ranges: carat®,carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
	6716 U-500	2CKA006710A0014	1

Bluetooth Low Energy (BLE) smart switch insert
Wall transmitter, 2 / 4 channel

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx.
- Smart switch for wireless remote control of radio components.
- Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Depending on the ecosystem, the wireless range is automatically extended via mains-powered BT mesh devices (repeater function).
- Encrypted transmission with AES-128 (CBC mode) and sequence counter.
- Contains NFC configuration interface according to NFC Forum Type 2 Tag (ISO/IEC 14443 Part 2 + 3).
- Therefore particularly simple commissioning of BLE radio components from Casambi.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
BT smart switch insert (SF)	**6716 UBT**	2CKA006710A0015	1

1gang rocker for Friends of Hue and Bluetooth (Casambi)

Smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
stainless steel	**6735 BT-866**	2CKA006730A0148	1

Rocker [1])

2gang rocker for Friends of Hue and Bluetooth (Casambi) smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
stainless steel	**6736 FoH-866**	2CKA006730A0139	1

[1]) Surface painted.

Rocker
1gang, with "Blind" icon NEW

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Colour	Type	Order code	Pack/Qty.
866 stainless steel	**6735-11-866**	2CKA006220A0990	1

pure stainless steel
Dimmers

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
Flush-mounted, LED, 2-100 W

With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps. Mix operaton of LEDi with conventional loads possible. Via mode switch adjustable between leading edge control and trailing edge control.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With adjustable minimum brightness.
Without cover plate. Rated voltage: 230 V~, + 10% / - 10%
Rated frequency: 50 Hz/60 Hz
Nominal power: 2 - 100 W/VA (retrofit LED loads).
Nominal power: 10 - 250 W/VA (non-LED loads).
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	6523 U-102-500	2CKA006512A0335	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
UP, LED, 2-400 W

Very small installation depth: < 20 mm.
With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without cover plate. Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz Nominal power: 2 - 100 W/VA (leading edge control) Nominal power: 2 - 400 W/VA (trailing edge control)

Colour	Type	Order code	Pack/Qty.
	6523 UR-104-500	2CKA006512A0354	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] [2] [3] [4] flush mounted, 1-10V

With rotary control.
For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control gears
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 700 W/VA
IEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	2112 U-101-500	2CKA006599A2873	1/10

[1] Non-illuminable.
[2] Use cover plates 2115 J-.../2115-.../6540-... .
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Making-current limiters have to be provided in case of too high making currents.

pure stainless steel
Dimmers

Busch-rotary dimmer [1]) Flush-mounted, DALI, tunable white

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE article no. 2116/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116 U	2CKA006599A3025	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1]) Flush-mounted, DALI, with internal power supply, tunable white

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116/11 U	2CKA006599A3026	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

pure stainless steel
Dimmers

Busch-rotary dimmer [1]) flush mounted, DALI

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
An additional DALI power supply is needed, e.g. by Tridonic, Philips, Helvar or 2117/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117 U-500	2CKA006599A2987	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1]) flush mounted, DALI, with internal power supply

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode. Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117/11 U-500	2CKA006599A2988	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate [1]) with rotary knob, with indication lamp

Elevated knob.
With transparent luminous ring.
For Busch-Dimmer®.
For inserts
2112 U-101/2247 U/2250 U/6513 U-102/6517 U-10x/ 6519 U/6520 U/6523 U(R)(10x) /6591 U-10x and 6592 U.
Material stainless steel.
Anti fingerprint.

Colour	Type	Order code	Pack/Qty.
stainless steel	**6540-866-102**	2CKA006599A2959	10/100

[1]) Replacement neon lamp, Art. No. 3855.

LED dimmer insert flex, 1gang [1]) [2]) [3]) [4]) [5]) [6]) FM, LED, 3-240 VA

2-wire connection (neutral conductor not required). Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA). Touch dimmer for switching lighting systems. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi). For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers. For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps. Mix operaton of LEDi with conventional loads possible. With manually adjustable operating mode: trailing / leading edge control. With adjustable minimum brightness. With light-level memory and minimum brightness memory. Low-noise level by MOSFET transistors. With electronic short-circuit protection. With electronic overload protection. Without control cover. For control element flex, 1gang, 64711. For control element flex, 2gang, 64721. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Rated power: 3-240 VA (LEDi). Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 1. Outputs: 1x dimming channel. Suitable for: 230 V LEDi, typical (leading edge control). Rated power: 3 - 100 VA. Suitable for: 230 V LEDi, typical (trailing edge control). Rated power: 3 - 240 W. Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer. Rated power: 10 - 240 VA.Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1]) In the case of conventional transformers, take ~20% transformer loss into account.
[2]) In case of electronic transformers, 5 % transformer losses.
[3]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4]) Recommendation: Please use loads and types of one producer.
[5]) The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6]) A liability on the part of Buscah-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

pure stainless steel

Dimmers

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@ home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Flex control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 2 gang, flex wireless

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@ home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Rocker 1gang, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
stainless steel	SRD-1-866	2CKA006220A0537	1

Rocker 2gang left, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
stainless steel	SRD-2-L-866	2CKA006220A0542	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

stainless steel	SRS-2-R-866	2CKA006220A0545	1

pure stainless steel

ABB flexTronics inserts

Relay insert flex, 1gang [1)]

3 wire connection (neutral conductor required).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... . For Busch-Watchdog 180 flex sensors 6476x-.... For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 1. Outputs: 1x Normally open contact, potential-bound. Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA. Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 2300 W
Suitable for: Low voltage halogen lamps that are operated via transformers. Rated power: 2300 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Relay insert flex, 2gang [1)]

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

pure stainless steel

ABB flexTronics inserts

e-contact insert flex, 1gang [1] [2]

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1] Use only dimmable high-voltage LEDs.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6]
FM, LED, 3-240 VA

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi)
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x dimming channel
Suitable for: 230 V LEDi, typical (leading edge control)
Rated power: 3 - 100 VA
Suitable for: 230 V LEDi, typical (trailing edge control)
Rated power: 3 - 240 W
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

pure stainless steel

ABB flexTronics comfort switch sensor

Extension insert flex [1]

3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts. Rated voltage: 230 V~, +10 % / -10 % Rated frequency: 50 Hz Control/Signal outputs: 1, electronic output, potential-bound Temperature range (Device): -5 °C to 45 °C Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Comfort switch flex sensor [1] [2]

Movement detector push-button switch combination. For switching lighting systems that depend on brightness and movement. With select lens, prevents detection of smaller animal. Push switch function possible at all times. With notice LED when manual operation is necessary. Extension of the detection range by main unit/extension unit combination. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off.
Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off. Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off. With continuous light/continuous Off function. Adjusting elements on rear side. Surveillance density: 9 sectors with 28 switching segments. Switch off delay: 1 to 10 min., adjustable. Compatible with all ABB flexTronics inserts. For relay insert flex, 1gang, 64811 U-500
For relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Display elements: LED for status display.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 5 m, lateral: 3 m, at mounting height: 1.1 m. Detection angle: 170°.
Brightness limit value: 5 Lux - daytime operation
Operation mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 28 mm
Above the wall: 21 mm.

Colour	Type	Order code	Pack/Qty.
stainless steel	**64765-866-500**	2CKA006800A2898	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Please order the respective flush-mounted insert separately.

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, basic sensor [1] [2] [3] with select-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Compatible with all free@home flex inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 22 mm. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m Detection angle: 180 ° Brightness limit value: 5 Lux - 500 Lux Up to daytime operation Mounting height: 0.8 m - 1.2 m Temperature range (Device): -5 °C to 45 °C Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
stainless steel	**64761-866-500**	2CKA006800A2936	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor [1] [2] [3] with select-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With continuous light/continuous Off function. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
Mounting height: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m
Detection angle: 180 °
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation
Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
stainless steel	**64762-866-500**	2CKA006800A2973	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

pure stainless steel

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with select-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. ./. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Works with free@home. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U.

Colour	Type	Order code	Pack/Qty.
stainless steel	**62762-866-WL-500**	2CKA006200A0181	1

Busch-Watchdog 180 flex, comfort sensor [1] [2] [3] with multi-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With continuous light/continuous Off function. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 31 mm. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Detection range: frontal: 8 m, lateral: 7 m, Mounting height: 1.1 m. Detection range 2: frontal: 8 m, lateral: 8 m, Mounting height: 2.2 m. Detection angle: 180 °
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m alternative: 2.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
stainless steel	**64764-866-500**	2CKA006800A3010	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with multi-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U.

Colour	Type	Order code	Pack/Qty.
stainless steel	62764-866-WL-500	2CKA006200A0249	1

pure stainless steel

Blind control / timers

Key Switch Insert [1] [2] [3] breaking circuit, 1-pole

For profile semi-cylindrical lock. In switched-on and switched-off status the key can be pulled out in the central position, respectively. Delivered without cylindrical lock. Rated voltage: 250 V~
Rated current: 10 AX. Suitable for: LEDi / CFLi. Rated power: 100 W. Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2733 USL-101	2CKA001101A0914	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Use the cylindrical lock according to the enclosed drawing.
[3] See profile semi-cylindrical lock.

Blind switch insert [1] [2] SP, switch

With interlock.
Rated voltage: 250 V~
Rated current: 10 AX
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/4 US-500	2CKA001012A2197	10/100
	2020/4 US-500	2CKA001413A1103	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] These blind switches/push buttons safely prevent a switch-over of the running direction being carried out too quickly.

Blind switch insert [1] [2]

With rotary knob/switch and push switch.
Rated voltage: 250 V~, Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2712 U	2CKA001101A0534	10
	SP, N, E		
	2713 U	2CKA001101A0542	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2]

With rotary knob/push button.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2722 U	2CKA001101A0559	10
	SP, N, E		
	2723 U	2CKA001101A0567	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

pure stainless steel

Blind control / timers

Blind switch/push-switch [1] [2] [3] [4]

For profile semi-cylindrical lock/switch and push-switch.
Delivered without cylindrical lock.
Rated voltage: 250 V~. Rated current: 10 AX
Suitable for: LEDi / CFLi. Rated power: 100 W
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2712 USL-101	2CKA001101A0872	10
	SP, N, E		
	2713 USL-101	2CKA001101A0880	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2] [3] [4]

For profile semi-cylindrical lock/push-button.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
British Standard EN 60669-1, IEC60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2722 USL-101	2CKA001101A0898	10
	SP, N, E		
	2723 USL-101	2CKA001101A0906	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

DIN profile-semi cylindrical lock

Acc. to German Standard DIN 18252.
Total length 40 mm
for blind switches and push switches
For inserts 2712/2713/2722/2723/2733 USL-101 and 2712/2733 SLW-5x.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	different lock mechanism, with 3 keys		
	0520 PZ-VS	2CKA000470A0013	1/100
	lock mechanism, with 3 keys		
	0521 PZ-GS	2CKA000470A0021	1/100

Blind compact timer

Suitable for blind and roller blind drives with mechanical or electronic limit switch shut-off.
Without extension unit input.
Running time: 3 min
N-busbar connection is required.
For manual and time-controlled switching of blinds and roller blinds.
Memory function for the simple storage of switching times.
The controlled devices can be manually operated at any time.
Simple setting via display with with segment display and background illumination.
Factory pre-set switching times, individual adaptations are possible.
2 switching times per day can be freely adjusted for each day of the week.
Automatic switchover from summer time to winter time (switch-off function).
Switching times and programs are safely stored in the event of a mains power failure.
Power reserve for time and date > 10 years.
Simple toggling between manual/automatic/vacation modes.
See the associated cover plates 6435-xx.
Programming possible only with control element attached and energized.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 2x Normally open contact
Rated current: 3 A, cos ϕ 0.5
Rated power: 690 VA
Temperature range (Device): 0 °C to 45 °C

Colour	Type	Order code	Pack/Qty.
	6422 U-500	2CKA006410A0410	1/10

pure stainless steel

Blind control / timers

Brightness sensor

For insert 6411U/S-101.
With 2 m connecting cable.
Measuring range: 15-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6414-101	2CKA006410A0389	1/10

Sun sensor

For insert 6411U/S-101.
Measuring range: 5-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6482	2CKA006410A0203	1

Busch-Short-time timer insert [1]) countdown timer

For time-programmed switching of electrical consumers. With control cover, without cover plate.
Minimum timer time: 1 second.
Maximum timer time: 9:59:59 hours.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 1x Normally open contact
Rated current: 10 A, cos ϕ 1
Rated power: 2300 VA
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6465 U-101-500	2CKA006410A0393	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
Cover frames:	1gang frame 1721 BS-2xG or Dual Box frame 1722 BSDB-2xG.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker with marking

As cover for flush-mounted blind control switch/push switch.
For inserts 2000/4 and 2020/4 US.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1785 JA-866**	2CKA001751A2964	10

Cover plate with rotary control, with marking

As cover for flush-mounted blind control switch/push switch. For inserts 2712 U, 2713 U and 2722 U, 2723 U.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1740-866**	2CKA001710A3748	10

Cover plate [1]) with labelling field

With marking.
For half-cylindrical type switches and blind control switch/push-switch. For inserts 2733 USL-101 and 2712 USL-101, 2713 USL-101, 2722 USL-101, 2723 USL-101.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1755 SL/PZ-866-101**	2CKA001710A3749	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Control element

For Busch-Blind control II insert 6411 U-101, 6411 U/S-101.
For basic blind insert 6418 U.
For Busch-Universal 2gang 1way insert 6402 U.
Surface painted.

Colour	Type	Order code	Pack/Qty.
stainless steel	**6430-866-102**	2CKA006430A0343	1/10

Time switch mechanism 16 A [1]) [2]) DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 15 min. For time-programmed switching of electrical consumers. Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird. Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist.
Rated voltage: 230 V~, +10 % / -10 %
Rated current: 16 A, cos ϕ 0.25.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1070 U	2CKA001043A0025	1/10

[1]) For screw-fixing only
[2]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

pure stainless steel

Blind control / timers

Time switch mechanism 16 A [1] [2] DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 120 min. For time-programmed switching of electrical consumers. Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird. Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist. Rated voltage: 230 V~, +10 % / -10 %. Rated current: 16 A, cos ϕ 0.25. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1071 U	2CKA001043A0124	1

[1] For screw-fixing only
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate with rotary knob, with marking

For Busch-Timer insert 1070 U.
Running time: 15 min
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1770-866-103**	2CKA001753A0259	10

Cover plate with rotary knob, with marking

For Busch-Timer insert 1071 U.
Running time: 120 min
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1771-866-103**	2CKA001753A0302	10

Cover plate [1]

For room thermostats 1098 U-101 and 1098 UF-101.
For short-time timer 6465 U-101.
For Busch-CO2 sensor 1091 U-500.
For blind compact timer 6422 U.
Surface painted.

Colour	Type	Order code	Pack/Qty.
stainless steel	**6435-866**	2CKA006430A0344	10

[1] Surface painted.

Blind insert, 1 gang, 2 way flex

3 wire connection (neutral conductor required). For the control of roller shutters, blind and awning motors with mechanical or electronic limit switch shut-off. Group formation via extension input possible. Operation also via conventional push buttons (2020 US non-illuminated/2021/6 UK) possible. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL.

Colour	Type	Order code	Pack/Qty.
	64831 U-500	2CKA006400A0096	1

Extension insert flex

3 wire connection (neutral conductor required). For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts.

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

pure stainless steel

Blind control / timers

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Control element, 1 gang, flex wireless

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

pure stainless steel

Blind control / timers

Weather Station

For recording and transmitting of brightness, temperature, wind speed and rain. Weather data can be linked with actuators to automatically control functions. Weather data can be visualized in the free@home web interface and the free@home app. Remote operation via the Bluetooth and smartphone/tablet app.

Colour	Type	Order code	Pack/Qty.
	WS-1-WL.1	2CKA006200A0297	1

Standard Inputs

WS-1/A1.1 Mast adapter weather station

Colour	Type	Order code	Pack/Qty.
	WS-1/A1.1	2CKA006200A0848	1

Rocker 1gang, with “Blind” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
stainless steel	SRB-1-866	2CKA006220A0535	1

Rocker 2gang left/right, “Blind” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
stainless steel	SRB-2-866	2CKA006220A0540	1

Rocker 2gang left, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
stainless steel	SRS-2-L-866	2CKA006220A0541	1

SCHUKO® socket outlet

With screwless terminals.
DP (2 P + E)
Material stainless steel.
Anti fingerprint.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 EUC-866-500**	2CKA002011A6212	10/100

SCHUKO® socket outlet [1]) shuttered

With screwless terminals.
DP (2 P + E)
Material stainless steel.
Anti fingerprint.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 EUCKS-866-500**	2CKA002013A5374	10/100

[1]) Increased shock protection .

SCHUKO® socket outlet [1]) [2]) shuttered

With screw-type terminals.
DP (2 P + E)
Material stainless steel.
Anti fingerprint.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**23 EUCB-866**	2CKA002013A5478	10

[1]) Increased shock protection .
[2]) With screw-type terminal for rigid and flexible wires

pure stainless steel
Socket outlets

SCHUKO® USB socket outlet, 2gang [1] [2] [3] [4] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the SCHUKO® socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 EUCB2USBAC-866-500**	2CKA002011A6315	1/10

[1] Increased shock protection .
[2] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[3] No data transfer.
[4] Surface painted.

SCHUKO® socket outlet [1] with labelling field

DP (2 P + E)
Size of labelling field: 60 x 9 mm.
Material stainless steel.
Anti fingerprint.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 EUN-866**	2CKA002011A3851	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

SCHUKO® socket outlet [1] with marking "EDV"

With screwless terminals.
DP (2 P + E)
Shuttered.
Material stainless steel.
Anti fingerprint.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 EUCKS/DV-866**	2CKA002013A5277	10

[1] Increased shock protection .

Busch-Protector® SCHUKO® socket outlet [1] with overvoltage protection

DP (2 P + E). With integrated and external signalling contact. ISN = 5 kA. Device protection for technical sensitive equipment such as computer, entertainment electronics and building management systems. Effectively reduces overvoltage peaks occurring between the sub-distribution switch board and SCHUKO® socket outlet. Arrestor test class: classification Type 2. Material stainless steel. Anti fingerprint. Rated voltage: 250 V~. Secondary: 250 V~ Rated current: 16 A. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2310EUGL/VA-866-11**	2CKA002011A3853	1

[1] Connecting terminals approved in accordance with VDE 0620-1 as connectors.

SCHUKO® socket outlet [1] with LED control light

Shuttered. DP (2 P + E)
With transparent lens. LED colour green.
Material stainless steel. Anti fingerprint.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 EUCBL-866**	2CKA002013A5289	10

[1] Resistant to aggressive media, e.g. ammonia, benzine, oils, greases, alcohol, cleansing agents, in normal concentrations.

SCHUKO® socket outlet with hinged lid

With screwless terminals. DP (2 P + E)
Hinged lid notches when opened.
Material stainless steel.
Anti fingerprint. Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 EUK-866**	2CKA002018A1490	10

Busch-Object socket outlet [1] shuttered

With screwless terminals.
DP (2 P + E)
Incl. Cover plate with extract mechanism.
Surface painted.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 EUAB-866**	2CKA002013A5408	10

[1] Increased shock protection .

Shaver socket outlet

For installation into FM 2gang wall box 3030 and 3031.
Rated voltage: 240 V, +10 % / -10 %
Output voltage: 115 V, +10 % / -10 %
Secondary: 240 V, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 20 VA. IEC 61558-2-5:97

Colour	Type	Order code	Pack/Qty.
stainless steel	**2332 UJBS-866**	2CKA002130A0293	1

pure stainless steel

Socket outlets

Flush-mounting wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 135 mm x 75 mm x 47 mm

Colour	Type	Order code	Pack/Qty.
	3030	2CKA001741A0067	4

Flush-mounting cavity wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 142 mm x 75 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
	3031	2CKA001741A0068	4

13 A Switched socket outlet

1gang
With screw-type terminals. SP switched
Without claws.
Only for mounting in VDE flush-mounted wallboxes CFB 122 and CFBM 122. Rated voltage: 250 V~
Rated current: 13 ABS 1363: part2

Colour	Type	Order code	Pack/Qty.
stainless steel	**2190 EUC-866**	2CKA002190A0217	10

Chinese socket outlet, 10 A

1gang
With screw-type terminals. Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 10 A. Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
stainless steel	**2193 EUC/10-866-500**		

Chinese socket outlet, 16 A

1gang
With screw-type terminals. Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
stainless steel	**2193 EUC/16-866-500**		

Chinese and Euro American socket outlet, 10 A

1gang
With screw-type terminals.
Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
stainless steel	**2195 EUC/10-866-500**		

Euro American socket outlet with earth, 16 A

1gang
With screw-type terminals.
Without claws.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
stainless steel	**2196 EUC-866-500**	CBA019A082S6010	

International socket outlet 13A [1]

1gang
With screw-type terminals.
Without claws.
Rated voltage: 250 V~
Rated current: 13 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
stainless steel	**2197 EUC-866-500**	CBA019A071S6010	

[1] Usage may be restricted in certain countries.

SCHUKO® socket outlet [1] [2] shuttered

With screw-type terminals.
DP (2 P + E)
Material stainless steel.
Anti fingerprint.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2300 EUCB-866**	2CKA002013A5452	10/100

[1] Increased shock protection.
[2] With screw-type terminals

pure stainless steel
Socket outlets

SCHUKO® socket outlet steplight® [1] [2]
With night orientation light

With separate connection cables for switch contact.
With LED. Shuttered. DP (2 P + E)
Surface painted.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 EUCBLI-866**	2CKA002013A5460	1

[1] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2] Resistant to aggressive media, e.g. ammonia, benzine, oils, greases, alcohol, cleansing agents, in normal concentrations.

SCHUKO® socket outlet [1] with labelling field

DP (2 P + E). Size of labelling field: 60 x 9 mm.
Material stainless steel.
Anti fingerprint. Shuttered.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 EUCNB-866**	2CKA002013A5432	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

FI-SCHUKOMAT, SCHUKO® socket outlet (RCD) [1] [2] [3]
with earth leakage circuit breaker

Shuttered. DP cut off (P,N)
Without PE monitoring.
With output terminals for connecting and protecting downsream SCHUKO® socket outlets.
Rated fault current: 30 mA.
With fixing claws. Rated frequency: 45-60 Hz.
Surface painted. Rated voltage: 230 V~
Rated current: 16 A
Protection class (Device): IP 21
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
stainless steel	**3120 EUCB-866**	2CKA003116A0669	1/10

[1] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2] Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.
[3] Increased shock protection .

Buschmat® FI - Insert [1]
with earth leakage breaker with connecting conductor

Protection of downstream consumers.
Rated actuating current: 30 mA. Release time: ≤ 30 ms. Short-circuit strength: 3000 A (with 25 A GL fuse).
Current surge strength: 250 A (8/20) µs.
DP cut off (P,N)
Without claw fixation.
Rated frequency: 45-60 Hz.
Surface painted.
Rated voltage: 230 V~
Rated current: 16 A
Protection class (Device): IP 21
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
stainless steel	**3151 UC-866**	2CKA003117A0011	1/10

[1] Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.

SCHUKO® socket outlet shuttered

With screwless terminals.
DP (2 P + E)
with hinged lid
Material stainless steel.
Anti fingerprint.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 EUKB-866**	2CKA002018A1521	10/100

USB socket outlet earthing pin, 2gang [1] [2] [3] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the pin earth socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
stainless steel	**20 MUCB2USBAC-866-500**	2CKA002017A1920	1/10

[1] Increased shock protection.
[2] No data transfer.
[3] Surface painted.

Universal data connection unit, cat. 3 [1] 1gang

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0213-500	2CKA000230A1549	10/100

[1] Suitable for cover plate 1803-xxx.

pure stainless steel

Data communication

Universal data connection box with down-leading outlet [1]) 2gang internally parallel connected

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0214	2CKA000230A0235	10/100
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Universal data connection box with down-leading outlet [1]) 2 x outlets, 8/8-pole

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0215	2CKA000230A0243	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 1gang

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without claws.
Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/11-101	2CKA000230A0409	1/10

[1]) Suitable for cover plate 1803-xxx.

pure stainless steel

Data communication

Data-connection box, RJ 45, cat. 6a iso, shielded [1]
2 x outlets, 8/8-pole

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For trunk systems, flush-mounted wall boxes and underfloor systems. For wires of AWG 24-22.
Without claws. Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/12-101	2CKA000230A0411	1/10

[1] Suitable for cover plate 1803-02-xxx.

Universal data connection box 8(6)/ telephone unit 6F+N - connection box [1] 2 x 6-pole



With straight outlet, with screw contacts.
Universal data-connection boxes: RJ 11/12, ISDN capable Cat. 3 in acc. with IEC 603-7/German Standard DIN EN 60603-7,
Telecommunication outlet (telephone unit): for 1 telephone, 1 auxiliary device or 1 data transmission unit,
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**UAE 8(6)TAE 6 F+N**	2CKA000230A0381	10/100

[1] Suitable for cover plate 2539-xxx, 1766-xxx and 1746-2xx-FN.

Satellite co-axial outlets 2 connectors/dead-end feeder

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0230-101	2CKA000230A0250	10/100

Antenna socket insert Radio/TV
2 connectors/loop through type

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0231-101	2CKA000230A0268	10/100

Satellite co-axial outlets Radio/TV/SAT
3gang dead-end feeder

Broadband technology 47-2.150 MHz.
SAT connection designed as screwable F-male plug.
with remote feed via F-bush
For DVB-T and broadband-cable-systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0232-101-500	2CKA000230A0463	10/100

Terminating resistor 75 Ohm

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0239	2CKA000230A0201	10/100

Mounting plate [1] [2] with green insert



For 2 modular jack inserts.
For systems: CommScope (AVAYA / AT&T / Lucent Technologies), GigaSPEED, PowerSUM, 360 GS 10E bis MGS 600-BK, M1 BH-xx, MPS 100E-xx.
With R&M adapter R310694 suitable for R&M connection modules R305111, R305112, R305113 and R305114.
Pitch dimensions: (WxH) approx. 16.9 x 17.9 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1810-500	2CKA001753A9974	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with red insert

For 2 modular jack inserts.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
For systems: AMP / tyco Electronics, BTR, EFB, Krone, Panduit, Quante, Radiall, Setec, Dr.-Ing. Sieger, Telena, Thomas & Betts
For Telegärtner AMJ/UMJ connection modules/ couplings.
For 2 fiber optic modules of the following types: 3M-Volition, Krone, mvk.
Pitch dimensions: (WxH) approx. 14.8 x 19.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1812-500	2CKA001753A9972	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

pure stainless steel

Data communication

Mounting plate [1] [2] with black insert

For MTRJ or 2 modular jack inserts.
For systems: Ackermann, AMP / tyco Electronics (Slim Line (SL) -SM 2gang/switches: 110Connect Jacks, Toolless Jacks / Standard 110Connect Jacks), Brand-Rex, CombiNet, EFB Electronic, Telena.
For 2 fiber optic modules of the following types: AMP / tyco Electronics MTRJ.
Pitch dimensions: (WxH) approx. 14.8 x 20.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1814-500	2CKA001753A9973	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with orange base

For 2 modular jack inserts.
For system: LexCom 150 and LexCom 250.
Pitch dimensions: (WxH) approx. 15.4 x 15.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1819	2CKA001753A8056	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with grey base

For 2 modular jack inserts.
For system: Panduit MiniCom (Cu. z.B. TX6 10 Gig Shielded Jack modules and fiber optic modules.
Pitch dimensions: (WxH) approx. 15.9 x 18.7 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1820	2CKA001753A8057	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Flush-mounted assembly adapter

For the accommodation of one or two universal modules 0219.
For flush-mounted installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/12	2CKA000230A0395	1/10

Channel assembly adapter

For the accommodation of one or two universal modules 0219.
For channel and under-floor installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/13	2CKA000230A0396	1/10

Universal module, RJ 45, cat. 6a iso, shielded [1] 1gang

For installation in installation adapter 0219/12 or 0219/13. Also suited for mounting into cover plate 2561-xxx, 2564-02-xxx and bases 1812, 1866 EB, and 1867 EB.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz). Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Cat. 6A according to ISO/IEC 11801: 2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability. Bend-radius optimised cable feed (30°). Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
For 8-pole plug RJ 45 only. Housing made from diecast zinc. With integrated dust-protection cap (can be removed if necessary). With insulation displacement connection. For data cables with a diameter of 6 -10 mm. For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219-101	2CKA000230A0413	1/10

[1] With assembly adapters appropriate for telephone unit cover plates 2539-21x and 1766-xxx.

Modular-Jack insert 6-pole Cat. 3 (AMP-No. 216000-2)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0210	2CKA000225A0078	10

pure stainless steel

Data communication

Modular-Jack insert 8-pole Cat. 3 (AMP-No. 216005-4)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0211	2CKA000225A0086	10

Built-in jack

For potential balancing jack cover plate and installation in cover plates.
For devices of 19 mm diameter.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0471-0-0037	2CKA000471A0037	10

Potential balancing plug

Suitable for plug 2095 UC-212 and built-in jack 0471-0-0037 acc. to German Standard DIN 42801.
For potential balancing jack cover plate (connection up to 6 mm² crimped or soldered)
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0299-0-0032	2CKA000299A0032	10

Blank plate with metal mounting plate

Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1742-866**	2CKA001710A3751	10

Cover plate [1])

As cover for flex outlet, for cords up to 10.3 mm diameter.
With strain relief (without terminal block).
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1749-866**	2CKA001710A3752	10

[1]) Cover plate can also be used individually as cover for telephone connector boxes (VDo).

Cover plate [1])

As cover for universal data connection boxes.
Art.-No. 0213 (Cat 3/ISDN), 0216-101, 0218/11-101 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
For WLAN access points 8186/31 and 8186/41.
Brand-Rex (WAEGV 8 EKR/EK).
BTR (universal data connecting unit design and IAE design). Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.
With labelling field.
Size of labelling field: 60 x 9 mm.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1803-866**	2CKA001710A3763	10/100

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Cover plate [1]) 2gang

As cover for universal data connection boxes.
Art. No. 0214, 0215 (Cat 3), 0220/12-507, 0221/12-507, 0218, 0217 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck. Brand-Rex (WAEGV 8/8 EKR/EK). AMP (NETCONNECT 5E).
BTR (E-DAT C6, E-DAT design, Universal data connecting unit design and IAE design).
cti (cti-wire 2.8 Cat.6). Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet. With labelling field.
Size of labelling field: 60 x 9 mm.
Material stainless steel. Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1803-02-866**	2CKA001710A3764	10/100

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter. USB power adapter insert 6475 U-500.
For loudspeaker connection box.
Suitable for part number 0248/0x-101.
For data modules.
Suitable for Art. No. 0219/12 and 0219/13.
For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1766-866**	2CKA001710A3765	10/100

Cover plate

As cover for telephone connector boxes (VDo).
Can be knocked out for single or double connection.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1745-866**	2CKA001710A3766	10

pure stainless steel
Data communication

Cover plate [1]) socket outlet

Telephone socket (TDO)
Surface painted.

Colour	Type	Order code	Pack/Qty.
stainless steel	**1762-866-506**	2CKA001710A4107	10/100

[1]) Suitable insert: TDO 3x 10 OUP (for 1 telephone and 2 auxiliary devices).

Cover plate [1]) [2])
as cover for standard Radio/TV/SAT socket outlets

With 2 connectors
Acc. to German Standard DIN 45330.
Radio/TV/SAT.
With M3 fixing screw.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1743-866**	2CKA001724A4271	10/100

[1]) Third opening can be knocked out.
[2]) See inserts for satellite coaxial socket outlets.

Cover plate [1])

As cover for 4gang Satellite co-axial socket outlet EVU 02 F, GEVU 15 S from Hirschmann.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1743-04-866**	2CKA001724A4378	10

[1]) See adapter ring 1746/10x.

Cover plate [1])

As cover for 4gang Satellite co-axial socket outlet SAT400/EAS/DC, EAS 405, 413 DAS from Ankaro.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1743/10-04-866**	2CKA001724A4369	10

[1]) See adapter ring 1746/10x.

Cover plate [1]) with labelling field

For modular jack with slide entrance.
To fit only Art. No. 1810, 1812, 1814, 1816, 1818, 1819 and 1820. Size of labelling field: 60 x 9 mm.
Material stainless steel. Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1800-866**	2CKA001710A3767	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Cover plate [1])

For 1 modular jack.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
Without claws.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2561-866**	2CKA001753A0404	10

[1]) Surface painted.

Cover plate with metal mounting plate

For 2 modular jack inserts.
Suitable for Art. No. 0210 and 0211.
Without claws. Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2561-02-866**	2CKA001753A0395	10

Cover plate

For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc. Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1746/10-866**	2CKA001710A3768	10

Intermediate ring

For attaching cover plates from the Busch-balance® SI range.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1747 BSI-866**	2CKA001710A4097	10

pure stainless steel

Data communication

Cover plate

With hinged lid. For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1746-866**	2CKA001710A3769	10

Intermediate ring with hinged lid [1] [2]

For accommodating cover plates from the Busch-Duro 2000® SI program and Reflex SI, e.g. socket outlets, equipotential, antenna, and ISDN socket outlets, etc.
Delivery without cover plate.
With sealing ring.
IP 44 only in conjunction with cover frames All Weather 44.
Surface painted.
Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
stainless steel	**2518-WD-866**	2CKA001719A0221	10

[1] Combinable with cover plate 1746-...-101. 1743-04-..., 1743/10-04-... or data inserts with covers 50 x 50 mm, e.g. from Ackermann, Rutenbeck, BTR, Telegärtner.
[2] Combinable only with covers for flush-mounted inserts

XLR centre plate

As cover for Neutrik plug connectors, type D series.
Without claws.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2553-866**	2CKA001724A4403	10

Equipotential socket outlet 2gang

Without claws.
For connecting wires up to 1 x 6 mm² and 4 x 2.5 mm².
IEC 60601-1:2005; DIN EN 60601 (VDE 0750-1): July 2007
Connection bolts German Standard DIN 42801.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2095 UC-866**	2CKA002495A0090	10

Cover plate with metal mounting plate

With screw-type terminal.
Fixed with central locknut.
As cover for pilot devices with a diameter of 22.5 mm
Without claws.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**2533-866**	2CKA001724A4270	10

Cover plate [1] with metal mounting plate

For communication devices.
With labelling field 60.2 x 10.2 mm.
Without claws.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1758-866**	2CKA001724A4272	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

pure stainless steel

Multimedia / communication adapters

Busch-Radio DAB+ [1])

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Control/Signal outputs: 2, Loudspeaker output, impedance 4 Ohm
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8215 U-101-500	2CKA008200A0276	1/10

[1]) No claw. Screw-fixing via keyholes.

Busch-Radio BTconnect DAB+ [1])
With Bluetooth interface for music replay

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
With Bluetooth interface for music replay of mobile devices.
Connection of external Bluetooth loudspeakers possible.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Bluetooth specification: 4.2.
Bluetooth profiles supported: A2DP
Number of stored Bluetooth connections: max. 8
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Bluetooth

Colour	Type	Order code	Pack/Qty.
	8217 U-101-500	2CKA008200A0279	1/10

[1]) No claw. Screw-fixing via keyholes.

pure stainless steel

Multimedia / communication adapters

Loudspeaker insert [1] 5 cm (2")

With flat plug connector.
With broadband characteristics.
Rated output: 2 W (RMS)
Incl. speaker connection cable.
Frequency response: 200 - 20,000 Hz
Impedance: 4 Ohm
Protection class (Device): IP 20, SELV
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1/10

[1] No claw. Screw-fixing via keyholes.

Flush Mounted Inserts Flush-mounted installation boxes and inserts

Multi media connector ins.

Colour	Type	Order code	Pack/Qty.
	8231 U	2CKA008200A0223	1/10

[1] No claw. Screw-fixing via keyholes.

USB power adapter insert, flush-mounted [1] [2] With USB-A & USB-C interface



For supply and support of mobile devices via USB-cable.
With USB type A and USB type C female connector.
To support two devices at the same time.
Supports automatic negotiating of optimum charging parameters for the shortest charging times.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Outputs: 2x USB charging interface
Suitable for: Only USB-A bus occupied:
Rated current: 3000 mA
Output voltage: 5 V-
Suitable for: Only USB-C bus occupied:
Rated power: 18 W

Suitable for: USB-A and USB-C bus occupied. Total:
Rated current: 3250 mA
Output voltage: 5 V-
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.

65 W power adapter insert, flush-mounted [1] [2] with USB-C interface

NEW

For power and charge of mobile devices via USB-C cable.
With USB type C female connector. Supports high power and automatic negotiating of optimum charging parameters for the shortest charging times.
Support of charging protocols: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the Qualcomm quick charge protocols: QC 2.0, 3.0, 4.0 and 5.
Support of USB PD (power delivery): 3.1 incl. PPS (programmable power supply).
Support of manufacturer specific protocolls: Samsung AFC and Huawei FCP (with 20 W).
With electronic short-circuit protection.
With electronic overload protection.
Fitting cover plate: 6479-...-500.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Power loss: < 75 mW
Outputs: 1x USB-C charging interface
Rated power: 65 W
Output voltage: 5 V, 9 V, 12 V, 15 V, 20.0 V DC
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 44 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6479 U-500	2CKA006400A0437	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.

HDMI connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link high-definition digital audio and video data from e.g. SAT-receiver, DVD-/Blue-Ray-player to plasma-type, LCD- or-LED-TVs/screens. HDMI-type A, 3D-compatible. Fully HD ready (1920 x 1080 pixel).
For 20-wire HDMI-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems. For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended. Without cover plate.
Without claws. Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/31-500**	2CKA000230A0430	1
grey	**0261/33-500**	2CKA000230A0432	1
alpine white	**0261/32-500**	2CKA000230A0431	1

[1] Please follow the recommendations of the cable and device producers for the max. HDMI cable lengths.

pure stainless steel

Multimedia / communication adapters

VGA connection unit [1)] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link analogue video data between PCs and laptops to monitors or digital projectors etc. VGA-type: D-type, 15-pole. Fully HD ready (1920 x 1080 pixel).
For 15-wire VGA-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems. For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended. Without cover plate.
Without claws. Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/21-500**	2CKA000230A0424	1
grey	**0261/23-500**	2CKA000230A0426	1
alpine white	**0261/22-500**	2CKA000230A0425	1

[1)] Please follow the recommendations of the cable and device producers for the max. VGA cable lengths.

USB connection unit [1)] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link mobile devices like e.g. printer, scanner, USB-sticks or digital cameras etc. USB-type A, USB 2.0 compatible. For 5-wire USB- cables via srew-type terminals. For trunk systems, flush-mounted wall boxes and underfloor systems. For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended. Without cover plate.
Without claws. Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/11-500**	2CKA000230A0418	1
grey	**0261/13-500**	2CKA000230A0420	1
alpine white	**0261/12-500**	2CKA000230A0419	1

[1)] Please follow the recommendations of the cable and device producers for the max. USB cable lengths.

Communication adapter for BNC-F Duct-jacks

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0262/11-500**	2CKA000230A0436	1
grey	**0262/13-500**	2CKA000230A0438	1
alpine white	**0262/12-500**	2CKA000230A0437	1

F duct-jack for communication adapter

For connection of antenna cables e.g.. for TVs with integrated TV-tuner and satellite receiver.
With screw-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**0262-500**	2CKA000230A0440	1

Communication adapter for Cinch-jacks



Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0263/11-500**	2CKA000230A0444	1
grey	**0263/13-500**	2CKA000230A0446	1
alpine white	**0263/12-500**	2CKA000230A0445	1

pure stainless steel

Multimedia / communication adapters

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked white: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
alpine white	**0263/04-500**	2CKA000230A0451	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked black: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
black	**0263/05-500**	2CKA000230A0452	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked red: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Red	**0263/06-500**	2CKA000230A0453	1

Cinch-jacks for communication adapter

For connecting analogue video devices, such as DVD players, hard disc recorders, video recorders or receivers.
Marked yellow: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
yellow	**0263/07-500**	2CKA000230A0454	1

Communication adapter for Mini-jacks 3,5mm

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0264/11-500**	2CKA000230A0458	1
grey	**0264/13-500**	2CKA000230A0460	1
alpine white	**0264/12-500**	2CKA000230A0459	1

Mini-jack 3,5 mm for communication adapter

For the connection of mobile terminal devices such as MP3 player (stereo), mobile telephone and smartphones.
Audio-band 20Hz - 20kHz.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
chrome gloss	**0264-500**	2CKA000230A0462	1

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals. Cable cross-section max. 10 mm^2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0248/02-101**	2CKA000230A0402	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm^2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm^2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**0248/05-101**	2CKA000230A0404	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Cover plate [1])



For Busch-Radio DAB+ 8215 U-101.
For Busch-Radio BTconnect DAB+ 8217 U-101.
For Busch-Radio iNet 8216 U.

Colour	Type	Order code	Pack/Qty.
stainless steel	**8252-866-101-500**	2CKA008200A0264	10

[1]) Surface painted.

pure stainless steel

Multimedia / communication adapters

Cover plate [1])

For loudspeaker insert 8223 U.
Surface painted.

Colour	Type	Order code	Pack/Qty.
stainless steel	**8253-866**	2CKA008200A0087	1/10

[1]) Surface painted.

CoverPlates (partly incl. Insert) Hotel application

C-plate media connector.

Colour	Type	Order code	Pack/Qty.
stainless steel	**8256-866**	2CKA008200A0231	1/10

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter.
USB power adapter insert 6475 U-500.
For loudspeaker connection box.
Suitable for part number 0248/0x-101.
For data modules.
Suitable for Art. No. 0219/12 and 0219/13.
For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1766-866**	2CKA001710A3765	10/100

Cover plate for power adapter insert

NEW

Cover plate for USB-C 65 W power adapter 6479 U-500.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**6479-866-500**	2CKA006400A0456	1

Cover plate with metal mounting plate

With fixing claws.
Loudspeaker inserts and cover.
With soldering tag.
For covering universal data communication connectors and circular connectors with screwed plug M 16x0.75 (installable in insert) in accordance with DIN 41524, 41529, 45322, 45327, 45328 and 45329.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1751-866**	2CKA001723A0255	10

Cover plate with rotary control, with marking

As a cover for volume controllers.
Suitable for the >LR mono BJ FM< devices of WHD.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1740 DR/03-866**	2CKA001710A3812	10

Cover plate for Busch-powerDock [1])

For Busch-powerDock charging cradle.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
stainless steel	**6477-866**	2CKA006400A0064	10

[1]) Surface painted.

pure stainless steel
Room thermostats

Room thermostat, flush-mounted [1] [2] [3]

END OF LIFE

Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 U-500	2CKA001032A0512	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Slide switch

END OF LIFE

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 U-500	2CKA001032A0514	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Sliding switch, 24 V

END OF LIFE

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~
Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 U	2CKA001032A0485	1
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] 1gang 2way

END OF LIFE

With fixing claws.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 U-101-500	2CKA001032A0513	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

pure stainless steel
Room thermostats

Room thermostat, flush-mounted [1] [2] [3]
Actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0487	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Sliding switch, actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached.
With built-in slide switch and control lamp for nightly reduction of 4 K.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UTA	2CKA001032A0488	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Sliding switch, actual value indication, 24 V

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached.
With built-in slide switch and control lamp for nightly reduction of 4 K.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~
Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 UTA	2CKA001032A0489	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Change-over contact, actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
With fixing claws.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 UTA	2CKA001032A0490	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

pure stainless steel
Room thermostats

Room thermostat, flush-mounted [1] [2] [3]
Change-over contact, setpoint indication, timer

END OF LIFE

With change-over contact.
Easy adjustment using menu and text-based display.
4 switching times per day can be user-defined for each day of the week. With fixing claws.
Automatic summer/wintertime switch-over
Power reserve > 10 hours.
To fit cover plate 6435-xxx.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 U-101	2CKA001032A0508	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] Remote sensor

END OF LIFE

With remote sensor and thermal feedback
For underfloor heating.
With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Remote sensor cable length: 4 m.
Sensor =NTC, 10 kilo-ohm at 25 degrees C.
Adjusting range: +10 to +50° C.
Connecting cable: 1mm² to 2.5 mm²
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 16 A, cos ϕ 1
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UF	2CKA001032A0497	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Room thermostat, flush-mounted [1] [2] Change-over contact, setpoint indication, timer, remote sensor

END OF LIFE

With change-over contact.
Easy adjustment using menu and text-based display.
4 switching times per day can be user-defined for each day of the week.
With fixing claws.
Automatic summer/wintertime switch-over
Remote sensor cable length: 4 m.
Sensor =NTC, 10 kilo-ohm at 25 degrees C.
Power reserve > 10 hours
To fit cover plate 6435-xxx.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 16 A
Temperature range (Device): 10 °C to 50 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 UF-101	2CKA001032A0509	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.

Room thermostat, flush-mounted [1] [2] [3]
Heating/cooling

END OF LIFE

With separate connection (230 V~) for external switchover between heating or cooling.
Switch contact opens when the set temperature is reached. With fixing claws.
Nominal current: 10 A heating. Nominal current: 5 A cooling. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 12 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1099 UHK-101-500	2CKA001032A0515	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Heating/cooling, sliding switch

END OF LIFE

With built-in sliding switch for switchover between cooling or heating. Switch contact opens when the set temperature is reached. With fixing claws.
Nominal current: 10 A heating. Nominal current: 5 A cooling
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Temperature range (Device): 5 °C to 30 °C. Dimensions: (L x W x D): 12 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1099 UHKEA	2CKA001032A0516	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

pure stainless steel
Room thermostats

Cover plate for room thermostat

For room thermostats 1094 U, 1097 U.
Surface painted.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
stainless steel	**1794-866**	2CKA001710A3755	10

Cover plate for room thermostat

With sliding switch for nightly room temperature reduction. to activate nighttime mode and reduction of room temperature by 4K, for thermostats 1095 U, 1096 U and 1095 UF. Surface painted.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
stainless steel	**1795-866**	2CKA001710A3756	10

Cover plate for room thermostat

For room thermostats 1094 UTA, 1097 UTA.
Surface painted.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
stainless steel	**1794 TA-866**	2CKA001710A3761	10

Cover plate for room thermostat

With sliding switch for nightly room temperature reduction. For room thermostats 1095 UTA, 1096 UTA.
Surface painted.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
stainless steel	**1795 TA-866**	2CKA001710A3762	10

Cover plate [1])

For comfort timer control element 6455-101-500.
For standard timer control element 6456-101.
For room thermostats 1098 U-101 and 1098 UF-101.
For short-time timer 6465 U-101.
For Busch-CO2 sensor 1091 U-500.
For blind compact timer 6422 U. Surface painted.

Colour	Type	Order code	Pack/Qty.
stainless steel	**6435-866**	2CKA006430A0344	10

[1]) Surface painted.

Cover plate for room thermostat

For room temperature controller 1099 UHK.
Surface painted.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
stainless steel	**1795 HK-866**	2CKA001710A4018	10

Cover plate for room thermostat

For room temperature controller 1099 UHKEA.
With sliding switch for switchover between cooling or heating. Surface painted.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
stainless steel	**1795 HKEA-866**	2CKA001710A4050	10

Room Thermostat

NEW

Electronic room thermostat, open contact, fm
Normally open contact, non-isolated. Switch contact opens when the set temperature is reached. Without fixing claws. Separate terminal to activate eco mode to reduce the room temperature by 3K. See respective cover plates 1794 R-xx. Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~. Power dissipation: ≤ 0,15 W. Rated current: 10 A. Temperature range (device): 5 °C - 30 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mm. Protection class device: IP 20. Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete. Servo-valves, "de-energised open", are necessary for connection to thermostat. e.g. Article No. 6164/10-102. Switching temperature difference: ± 0.5 K

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0525	1/10
	1097 U-101-500	2CKA001032A0528	1/10
	1099 UHK-101-500	2CKA001032A0531	1/10

Cover Plate Thermostat Turn button Pure Stainless Steel

NEW

C-plate for room thermostats 1094 U-101, 1097 U-101 1099 U-101.

Colour	Type	Order code	Pack/Qty.
stainless steel	**1794 R-866**	2CKA001710A4203	10

pure stainless steel

Room thermostats

RTC Room Temperature Controller

NEW



Room Temperature Controller for Room thermostat Bluetooth with Setpoint display, Timer and Remote control Button 230 V

Colour	Type	Order code	Pack/Qty.
	1095 UTA-BT-500	2CKA001032A0534 Insert - Bluetooth	1
	1094 USITA-BT-500	2CKA001032A0536 Insert - Bluetooth	1
	1096 UTA-BT-500	2CKA001032A0538 Insert - Bluetooth	1
	1099 UHKTA-BT-500	2CKA001032A0540 Insert - Bluetooth	1
	62841 U-WL-500	2CKA006800A3115 Insert - free@home	1
	62842 U-WL-500	2CKA006800A3117 Insert - free@home	1
	62843 U-WL-500	2CKA006800A3119 Insert - free@home	1

Cover Plate, Thermostat Various symbols for Thermostat anthracite - Platform 63

NEW

Central plate with print for room temperature controller with display/Bluetooth or free@home wireless
For room temperature controller with display:
1094 USITA-BT - 1095 UTA-BT - 1096 UTA-BT - 1099 UHKTA-BT - 62841 U-WL - 62842 U-WL - 62843 U-W

Colour	Type	Order code	Pack/Qty.
stainless steel	**1794 MDRT-866**	2CKA006430A0422	

LED light

Info light unit [1] [2]

Size of information field 43 x 43 mm.
Long service life of the lighting element (LEDs).
Homogeneous backlighting of the information field.
Colour temperature 6,500 K (cold white)
Power consumption: < 0.5 W
Rated voltage: 230 V~
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2062 U	2CKA001511A0115	1/10

[1] Use relay inserts when switching through movement sensors or comfort switches.
[2] For switching the LED flush mounted insert use switches without orientation light only.

Cover plate [1] [2]

As cover for flush-mounted info light.
For insert 2062 U.
Size of information field 43 x 43 mm.
Surface painted.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
stainless steel	**1716-866**	2CKA001731A1955	1

[1] Included with the cover are 46 different text labels and symbols.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Cap for indication lamp

For indication lamps.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
clear-transparent	**1565-11**	2CKA001565A0167	10
Red	**1565-12**	2CKA001565A0175	10
green	**1565-13**	2CKA001565A0183	10

pure stainless steel

Accessories

Extension of claws [1])

For the installation of flush-mounted SCHUKO® socket outlets and also switches, push-buttons, etc. and deeply installed flush-mounted boxes.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2148	2CKA002148A0120	100

[1]) Not suitable for types 2000/3 US, 2000/6/2 US, 2000/6/6 US-101 and double socket outlets.

Braille symbol

Self-adhesive (transparent) for cover 2506-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	light		
	2144 LI	2CKA001714A0295	10/1000
	bell		
	2144 KI	2CKA001714A0296	10/1000
	key		
	2144 TR	2CKA001714A0297	10/1000

Braille symbol socket outlet

Self-adhesive, transparent for SCHUKO® socket outlets with hinged lid 20 EUK-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2144 ST	2CKA001714A0298	10/1000

DIN A 4 labelling sheet [1]) plastic foil

Suitable for all to be labeled Busch-Jaeger devices.
For laser printer.
The text of the foil is printed via the Busch-Jeager labeling service.
Dimensions: (L x W x D): 297 mm

Colour	Type	Order code	Pack/Qty.
translucent	**1799/02**	2CKA001799A0959	1
transparent	**1799/03**	2CKA001799A0960	1

[1]) 1 piece = 1 sheet.

RC suppressor

For protection against the damage or destruction of electronic devices due to overvoltages.
For wiring network-interconnected inductivities (e.g.. relay, protection, fluorescent lamps, transformers, etc.).
Eliminates functional disturbances on electronic devices, e.g. automatic circuit reclosure (clocking) of a movement detector.
Dimensions: diameter 25 mm, length 35 mm, length of the connecting cable approx. 100 mm.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz

Colour	Type	Order code	Pack/Qty.
	6899	2CKA006899A0231	10

pure stainless steel
Cover frames

Cover frame [1]) 1gang frame

Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20
Dimensions: (L x W x D): 80 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
stainless steel	**1721-866K-500**	2CKA001754A4500	10/100

[1]) Suitable for installation in trunking systems with 80 mm conduit.

Cover frame [1]) 2gang frame

For vertical or horizontal installation.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20
Dimensions: (L x W x D): 151 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
stainless steel	**1722-866K-500**	2CKA001754A4501	10/100

[1]) Suitable for installation in trunking systems with 80 mm conduit.

Cover frame [1]) 3gang frame

For vertical or horizontal installation.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20
Dimensions: (L x W x D): 222 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
stainless steel	**1723-866K**	2CKA001754A4319	10

[1]) Suitable for installation in trunking systems with 80 mm conduit.

Cover frame [1]) 4gang frame

For vertical or horizontal installation.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20
Dimensions: (L x W x D): 293 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
stainless steel	**1724-866K**	2CKA001754A4320	1

[1]) Suitable for installation in trunking systems with 80 mm conduit.

Cover frame [1]) 5gang frame

For vertical or horizontal installation.
Material stainless steel.
Anti fingerprint.
Protection class (Device): IP 20
Dimensions: (L x W x D): 394 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
stainless steel	**1725-866K**	2CKA001754A4321	1

[1]) Suitable for installation in trunking systems with 80 mm conduit.

Notes

solo®
Touching beauty.

Delicate shades of the cover-plates and cool chrome come together. Natural attraction. They make a harmonious unit. Let solo® switches and socket outlets shine. They will become a significant design piece of any interior. Beauty which touches every day.

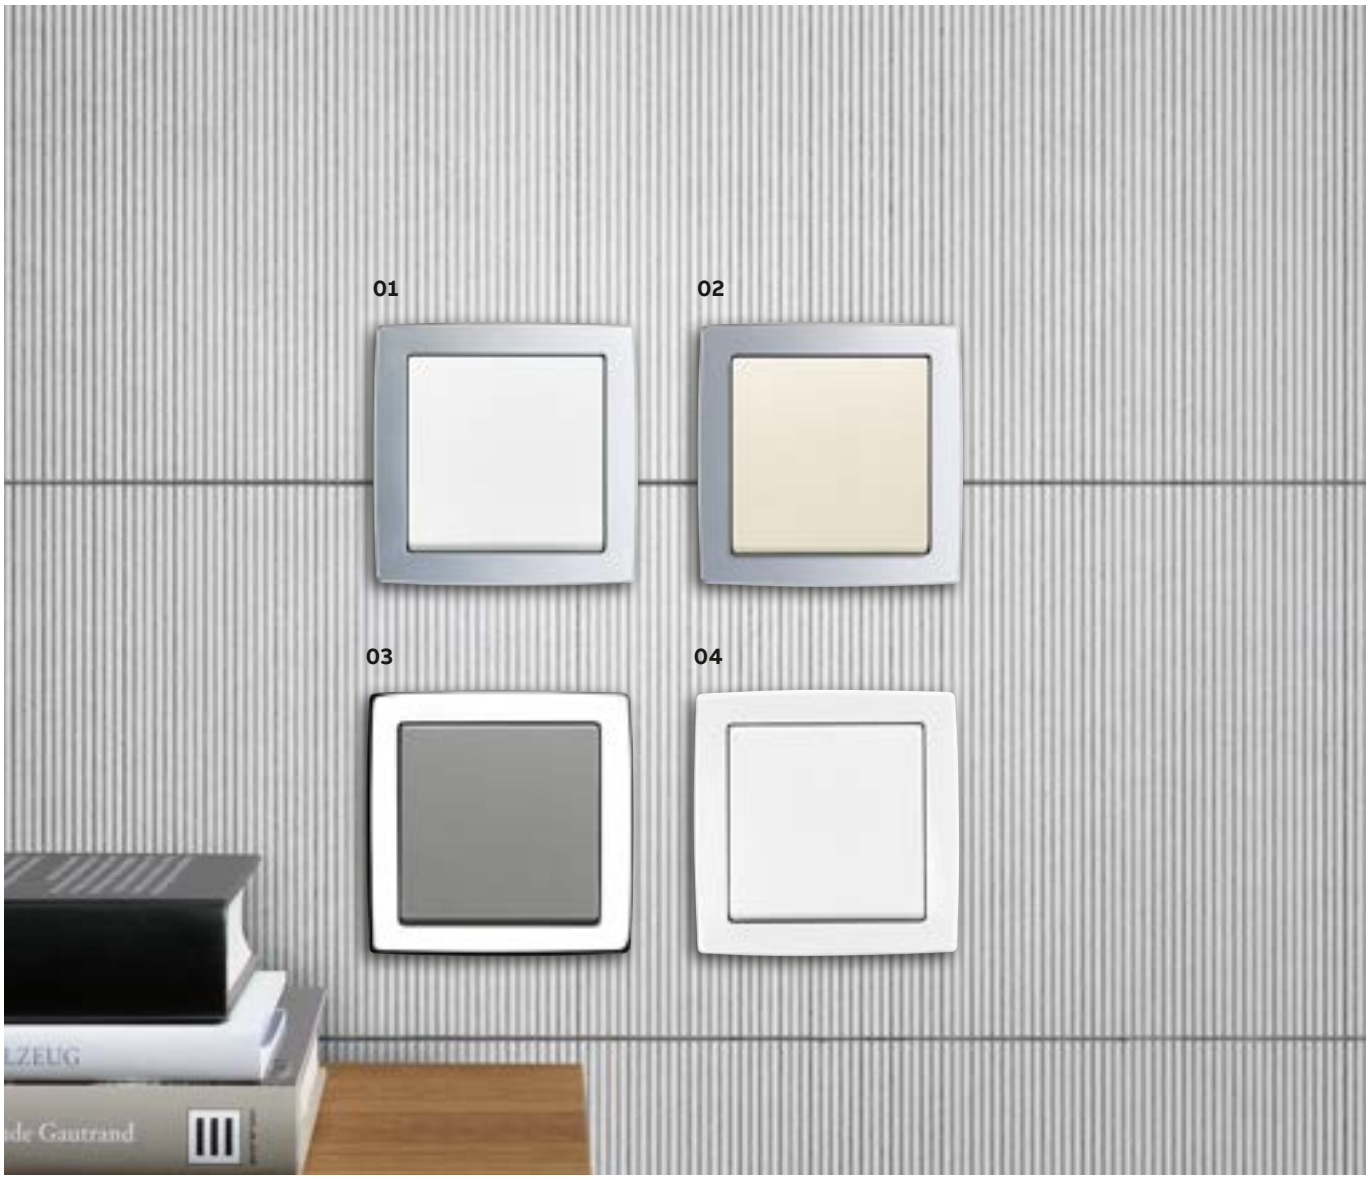

01 studio white (similar to RAL 9016) / chrome matt
02 ivory (similar to RAL 9013) / chrome matt
03 grey metallic / chrome gloss
04 studio white (similar to RAL 9016) / studio white

Materials
Cover: thermoplastic cover (PC), impact-proof and fracture-resistant, UV-resistant, free of PVC and halogen.

solo®

Selected functions.

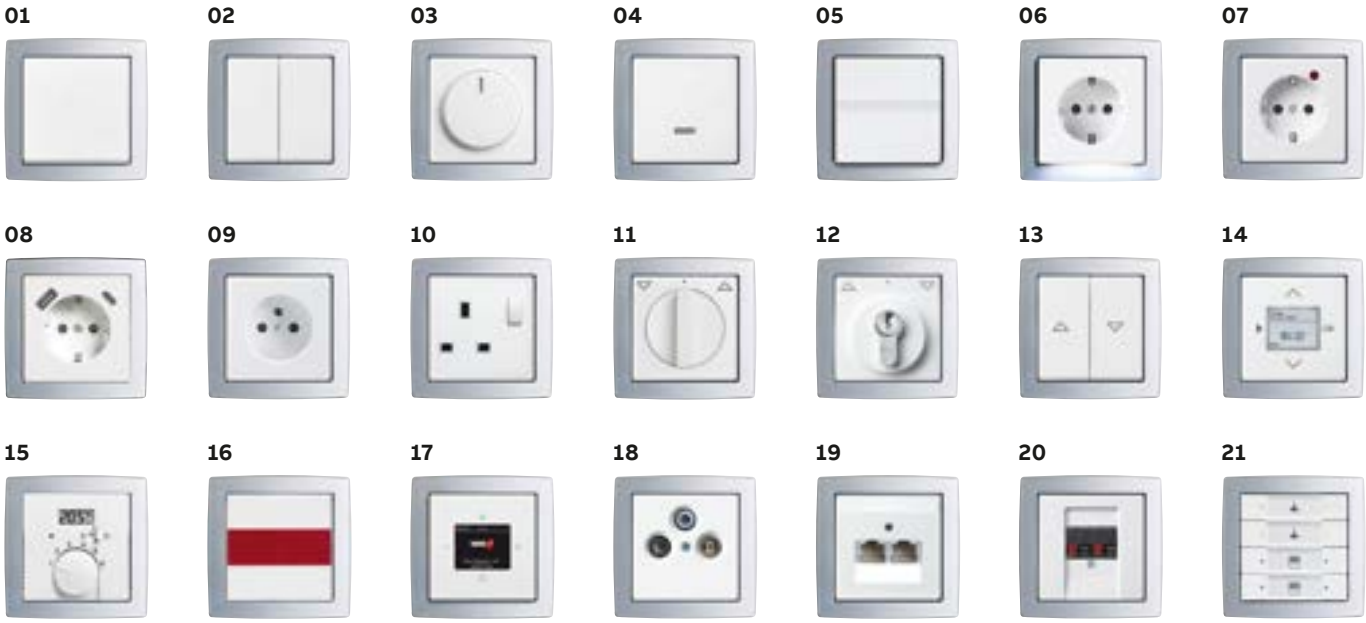

01 Rocker switch 1gang
02 Rocker switch 2gang
03 Busch Universal Rotary Dimmer
04 Touch dimmer
05 Busch-Comfort switch
06 Busch-steplight®
07 Busch-Protector® SCHUKO® socket outlet with overvoltage protection
08 SCHUKO® USB socket outlet, USB A&C
09 Socket outlet with earthing pin
10 Switched socket outlet BS standard
11 Blind switch with rotary knob
12 Busch-Blind control switch with semi-cylindrical lock
13 Busch-Blind
14 Comfort timer
15 Room thermostat with display
16 Busch-Infoline® alarm insert
17 Busch-Radio DAB+
18 Antenna socket for radio/TV/satellite
19 Universal data connection box
20 Stereo loudspeaker connecting box
21 KNX sensor, for more KNX products see part 12 of the catalogue - Intelligent Building Solutions

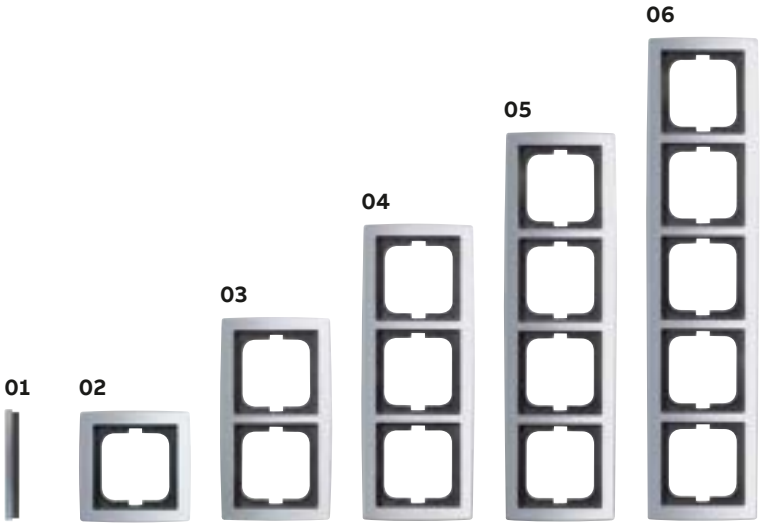

1 to 5gang cover frame for horizontal and vertical installation.
01 Side view, 11 mm x 87 mm
02 87 mm x 87 mm
03 87 mm x 157 mm
04 87 mm x 228 mm
05 87 mm x 299 mm
06 87 mm x 370 mm

For more information about light switch ranges visit ABB global web sites.

solo®

Rocker switches / push switches

Rocker Switch Mechanism [1]



Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way		
	2000/6 US-500	2CKA001012A2198	10/100
	2gang 1way		
	2000/5 US-500	2CKA001012A1150	10/100
	DP, 1gang 2way [2]		
	2000/6/2 US	2CKA001012A0954	10
	1gang		
	2000/7 US-500	2CKA001012A2199	10/100
	DP, 1gang 1way		
	2000/2 US-500	2CKA001012A2196	10/100
	SP, 1gang 1way switch		
	2000/1 US-500	2CKA001012A2059	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1]

Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	Switch-off and two-way circuit 16 A		
	2400/6 US-500	2CKA001012A2232	10/100
	2gang switch 16 A		
	2400/5 US-500	2CKA001012A2234	10
	1gang intermediate 16 A		
	2400/7 US-500	2CKA001012A2236	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1] 2gang 2way

With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/6/6US-101-500	2CKA001011A0928	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]
Changeover/changeover circuit 16 A

With screwless terminals.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6/6US-101-500	2CKA001022A0663	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1] [2] DP, 1gang 1way



For switching high loads.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/2 US-101-500	2CKA001012A2193	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Also for switching SCHUKO® socket outlets.

Rocker Switch Mechanism [1] [2] 3-pole, 1gang 1way switch

Rated voltage: 400 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/3 US	2CKA001011A0816	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1]

With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way [2]		
	2000/6 USGL-500	2CKA001012A2194	10/100
	2gang 1way		
	2000/5 USGL	2CKA001012A1135	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.

solo®

Rocker switches / push switches

Rocker Switch Mechanism, control [1]
2gang switch with N-clamp 16 A

With LED. Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/5 USK-500	2CKA001012A2238	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism, control [1] [2] [3]



With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way with N-terminal		
	2000/6 USK-500	2CKA001022A0659	10/100
	DP, 1gang 1way		
	2000/2 UK	2CKA001022A0656	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Rocker Switch Mechanism, control [1] [2] [3]
Switch-off and two-way circuit with N-clamp 16 A



With neon lamp.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6 USK-500	2CKA001022A0661	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-500	2CKA001413A0574	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With 2 independent signalling contacts.
Rated voltage: 250 V~
Inputs: 1.
Outputs: 1
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-201	2CKA001413A0483	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1] [2] [3]
SP, with normally open contact (operating current)

With illumination.
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 USGL-500	2CKA001413A1106	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.
[3] For relay and touch dimmer applications.

Push-switch mechanism [1]

With one input terminal and 2 actuating covers.
Rated voltage: 250 V~
Inputs: 1
Outputs: 2x Normally open contact
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-205-500	2CKA001413A1105	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1] SP, 1gang 2way



Can be wired for normally open contacts (stand-by current) or normally closed contacts (operating current).
With N terminal.
Rated voltage: 250 V~, Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-206-500	2CKA001413A1104	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

solo®

Rocker switches / push switches

Rocker

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1786-82-500**	2CKA001751A3083	10/100
studio white	**1786-84-500**	2CKA001751A3074	10/100

[1] Surface painted.

Rocker

For flush-mounted switch 2g 1w, 2g push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1785-82**	2CKA001751A2744	10/100
studio white	**1785-84-500**	2CKA001751A3076	10/100

[1] Surface painted.

Rocker

As a cover for flush-mounted control 2gang switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1785 K-82-500**	2CKA001751A3124	10
studio white	**1785 K-84-500**	2CKA001751A3128	10

[1] Surface painted.

Rocker with small red spherical cap

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1789-82**	2CKA001751A2813	10
studio white	**1789-84-500**	2CKA001751A3091	10/100

[1] Surface painted.

Rocker with small transparent lens

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1789 N-82**	2CKA001751A3148	10/100
studio white	**1789 N-84-500**	2CKA001751A3151	10/100

[1] Surface painted.

Switch rocker with marking with small transparent lens

With >Plug< icon.
As cover for flush-mounted switch 1g1w DP and 3pole with neon lens and marking "I O"
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1789 ST-82**	2CKA001751A3158	10/100
studio white	**1789 ST-84-500**	2CKA001751A3161	10/100

[1] Surface painted.

Switch rocker with marking

With >Light< icon.
For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2520 LI-82**	2CKA001751A3187	10/100
studio white	**2520 LI-84-500**	2CKA001751A3190	10/100

[1] Surface painted.

Switch rocker with marking

With >Key< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2520 TR-82**	2CKA001751A3197	10/100

[1] Surface painted.

solo®

Rocker switches / push switches

Switch rocker with marking

With >Bell< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2520 KI-82**	2CKA001751A3177	10/100
studio white	**2520 KI-84-500**	2CKA001751A3180	10/100

[1] Surface painted.

Switch rocker with marking with small transparent lens

With >Light< icon.
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1789 LI-82**	2CKA001751A2745	10
studio white	**1789 LI-84-500**	2CKA001751A3084	10/100

[1] Surface painted.

Switch rocker with marking with small transparent lens

With >Key< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1789 TR-82**	2CKA001751A2747	10
studio white	**1789 TR-84**	2CKA001751A2755	10

[1] Surface painted.

Switch rocker with marking with small transparent lens

With >Bell< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1789 KI-82**	2CKA001751A2746	10
studio white	**1789 KI-84**	2CKA001751A2754	10

[1] Surface painted.

Rocker [1] [2]) with labelling field

With >Bell< icon.
With pilot lamp for uniform illumination of the labelling field.
For flush-mounted push switch.
Size of labelling field: 59.7 x 11.7 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1764 NLI/KI-82**	2CKA001731A3999	10/100
studio white	**1764 NLI/KI-84-500**	2CKA001731A4002	10/100

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Illumination using neon lamp 8353 or incandescent lamp 8344-1 and LED inserts.
[3] Surface painted.

Rocker [1] [2]) with labelling field

With pilot lamp for uniform illumination of the labelling field.
For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Size of labelling field: 59.7 x 11.7 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1764 NLI-82**	2CKA001731A1876	10
studio white	**1764 NLI-84**	2CKA001731A1877	10/100

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Illumination using neon lamp 8353 or incandescent lamp 8344-1 and LED inserts.
[3] Surface painted.

Switch rocker with marking with small red spherical cap

With imprint >0< and >I<.
As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1788-82**	2CKA001751A2742	10
studio white	**1788-84**	2CKA001751A2750	10/100

[1] Surface painted.

Switch rocker with marking with small red spherical cap

With >Heating< imprint.
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1789 H-82**	2CKA001751A2743	10
studio white	**1789 H-84**	2CKA001751A2751	10

[1] Surface painted.

solo®

Rocker switches / push switches

CoverPlates (partly incl. Insert) Hotel application

Rocker el. push-switch.

Colour	Type	Order code	Pack/Qty.
ivory white	**2570-10-82**	2CKA001751A3263	10
studio white	**2570-10-84**	2CKA001751A3258	10

[1] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker 2g el. push-switch.

Colour	Type	Order code	Pack/Qty.
ivory white	**2570-20-82**	2CKA001751A3274	10
studio white	**2570-20-84**	2CKA001751A3269	10

[1] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker 3g el. push-switch.

Colour	Type	Order code	Pack/Qty.
ivory white	**2570-30-82**	2CKA001751A3285	10
studio white	**2570-30-84**	2CKA001751A3280	10

[1] Surface painted.

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

El. push-switch insert.

Colour	Type	Order code	Pack/Qty.
	2051 U	2CKA001413A1115	10

Flush Mounted Inserts Black

El. push-switch insert 2g.

Colour	Type	Order code	Pack/Qty.
	2052 U	2CKA001413A1116	10

Flush Mounted Inserts Black

El. push-switch ins. 3g.

Colour	Type	Order code	Pack/Qty.
	2053 U	2CKA001413A1117	10

Cover plate

For card switch.
For insert 2025 U.
Suitable for cards sized 54 x 86 mm.
The inner part of the cover plate is made of light-conducting plastic, so that the card slot is illuminated.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1792-82**	2CKA001710A3640	10
studio white	**1792-84**	2CKA001710A3641	10

[1] Surface painted.

Card switch 10 A [1]
SP, with normally open contact (operating current)



Illuminable.
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2025 U	2CKA001012A1713	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

CoverPlates (partly incl. Insert) Hotel application

C-plate, card switch RFID.

Colour	Type	Order code	Pack/Qty.
ivory white	1792 RFID-84	2CKA001710A4127	10
studio white	1792 RFID-82	2CKA001710A4132	10

[1] Surface painted.

solo®

Rocker switches / push switches

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

Card switch insert RFID.

Colour	Type	Order code	Pack/Qty.
	2025 RFID U	2CKA001012A2242	10

Switch rocker with marking

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
DO NOT DISTURB
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1786/11-82**	2CKA001751A2997	10
studio white	**1786/11-84**	2CKA001751A2998	10

[1] Surface painted.

Switch rocker with marking

For flush-mounted switch 2g 1w, 2g push switch.
DO NOT DISTURB
MAKE UP ROOM
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1785/11-82**	2CKA001751A2991	10
studio white	**1785/11-84**	2CKA001751A2992	10

[1] Surface painted.

Switch rocker with marking

As cover for flush-mounted rocker control switch insert, DND/MUR.
DO NOT DISTURB
MAKE UP ROOM
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1785/11 K-82**	2CKA001751A3214	10
studio white	**1785/11 K-84**	2CKA001751A3209	10

[1] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker DND/MUR electronic

Colour	Type	Order code	Pack/Qty.
ivory white	**2058-24-84**	2CKA001751A3220	10
studio white	**2058-24-82**	2CKA001751A3225	10

[1] Surface painted.

Rocker switch insert DND/MUR [1])



With LED.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W,
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028 UK	2CKA001012A2240	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker switch insert DND/MUR [1])



With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028/12 UK	2CKA001012A2241	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Flush Mounted Inserts

El. push-switch DND/MUR.

Colour	Type	Order code	Pack/Qty.
	2058 UK	2CKA001413A1114	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Bell push-switch DND/MUR 230 V [1])

With LED.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
ivory	**2029 UC-82**	2CKA001751A3168	1
studio white	**2029 UC-84**	2CKA001751A3170	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Surface painted.

solo®

Rocker switches / push switches

Bell push-switch DND/MUR 24 V [1)]

With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
ivory	**2029/12 UC-82**	2CKA001751A3236	1
studio white	**2029/12 UC-84**	2CKA001751A3231	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2)] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Bell push-switch DND/MUR.

Colour	Type	Order code	Pack/Qty.
ivory	**2059 UC-84**	2CKA001751A3240	1
studio white	**2059 UC-82**	2CKA001751A3245	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2)] Surface painted.

Pull switch [1)] SP, with normally open contact (operating current)

With 2-metre pull cord, red handle, and red neon indicator.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	2020/01 US-101	2CKA001413A1112	10

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Pull switch [1)] SP, break contact

With 2-metre pull cord, red handle, and red neon indicator.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	2020/10 US-101	2CKA001413A1111	10

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker open for red pull switch neon indicator

For pull switch 2020/xx US.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1720-82**	2CKA001731A1915	10
studio white	**1720-84**	2CKA001731A1916	10

solo®
Dimmers

Dimmers

Cover plate [1]) for pull switch 2610/6 UC-xx, 2610/6 UJ-xx

With screw-type terminal
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1796-82**	2CKA001753A0309	10
studio white	**1796-84**	2CKA001753A0311	10

[1]) Exchanging the available cover/cover plate.
[2]) Surface painted.

Three-step rotary switch [1]) [2]) SP, with zero position

With zero position.
Rated voltage: 250 V~.
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710 U	2CKA001101A0918	1/10

[1]) Install only in conjunction with wall boxes ø 60 mm.
[2]) Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Three-step rotary switch [1]) [2]) SP, without zero position

Without zero position.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710/1 U	2CKA001101A0919	1/10

[1]) Install only in conjunction with wall boxes ø 60 mm.
[2]) Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Cover plate with rotary control, with marking

As cover for flush mounted three-step rotary switch.
With zero position.
For insert 2710 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2542 DR/01-82**	2CKA001710A3645	10
studio white	**2542 DR/01-84**	2CKA001710A3646	10

[1]) Surface painted.

Cover plate with rotary control, with marking

As cover for flush mounted three-step rotary switch.
Without zero position.
For insert 2710/1 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2542 DR/02-82**	2CKA001710A3650	10
studio white	**2542 DR/02-84**	2CKA001710A3651	10

[1]) Surface painted.

Comprising Friends of Hue smart switch insert

Comprising 2gang rocker 6736 FoH-8xx for Friends of Hue smart switch. Consisting of 1gang future® linear cover frames. Comprising fixing plate and intermediate ring. Smarter light switches for wireless remote control of Philips Hue lamps For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<.
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology.

Colour	Type	Order code	Pack/Qty.
studio white	**6716 UJ-84-500**	2CKA006710A0011	1
black matt [1])	**6716 UJ-885-500**	2CKA006710A0018	1

[1]) Surface painted.

Bluetooth Low Energy (BLE) smart switch complete set. Wall transmitter, 2/4 channels

Consisting of BLE smart switch insert 6716 UBT, 2gang rocker 6736 FoH-8xx for smart switches, 1gang future® linear cover frame, fixing plate and intermediate ring. Smarter light switch for wireless remote control of BLE radio devices. Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.

- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
studio white	**6716/01 UJ-84-500**	2CKA006730A0156	1

solo®
Dimmers

Friends of Hue smart switch insert
Wall-mounted transmitter, 2 / 4 channel

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx. Smarter light switches for wireless remote control of Philips Hue lamps. For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology.
Combinable with the Busch-Jaeger switch ranges: carat®,carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
	6716 U-500	2CKA006710A0014	1

Bluetooth Low Energy (BLE) smart switch insert.
Wall transmitter, 2 / 4 channel

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx.
- Smart switch for wireless remote control of radio components.
- Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Depending on the ecosystem, the wireless range is automatically extended via mains-powered BT mesh devices (repeater function).
- Encrypted transmission with AES-128 (CBC mode) and sequence counter.
- Contains NFC configuration interface according to NFC Forum Type 2 Tag (ISO/IEC 14443 Part 2 + 3).
- Therefore particularly simple commissioning of BLE radio components from Casambi.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
BT smart switch insert (SF)	**6716 UBT**	2CKA006710A0015	1

Smart Switch, WL NEW

Smarter light-/blind switch for wireless control of Busch-flexTronics® wireless and Busch-free@home® devices. Wall-mounted transmitter, 2/4 channels.
Operation in ABB-flexTronics® wireless with up to 32 devices (room control). Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required.
Programming with the ABB-free@home® Next App. Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.
Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.

Colour	Type	Order code	Pack/Qty.
	62721 U-WL-500	2CKA006710A0048	1

1gang rocker for Friends of Hue and Bluetooth (Casambi)

Smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
beige	**6735 BT-82**	2CKA006730A0143	1
white	**6735 BT-84**	2CKA006730A0145	1

[1] Surface painted.

Rocker

2gang rocker for Friends of Hue and Bluetooth (Casambi) smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
ivory white	**6736 FoH-82**	2CKA006730A0134	1
studio white	**6736 FoH-84**	2CKA006730A0136	1

[1] Surface painted.

Rocker
1gang, with "Blind" icon NEW

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Colour	Type	Order code	Pack/Qty.
82 ivory white	**6735-11-82**	2CKA006220A0986	1
84 studio white	**6735-11-84**	2CKA006220A0988	1

solo®
Dimmers

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
Flush-mounted, LED, 2-100 W

With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
Via mode switch adjustable between leading edge control and trailing edge control.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With adjustable minimum brightness.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10%
Rated frequency: 50 Hz/60 Hz
Nominal power: 2 - 100 W/VA (retrofit LED loads).
Nominal power: 10 - 250 W/VA (non-LED loads).
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6523 U-102-500	2CKA006512A0335	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
UP, LED, 2-400 W

Very small installation depth: < 20 mm.
With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without cover plate. Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz Nominal power: 2 - 100 W/VA (leading edge control) Nominal power: 2 - 400 W/VA (trailing edge control)

Colour	Type	Order code	Pack/Qty.
	6523 UR-104-500	2CKA006512A0354	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] [2] [3] [4] flush mounted, 1-10V

With rotary control.
For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control gears
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 700 W/VA
IEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	2112 U-101-500	2CKA006599A2873	1/10

[1] Non-illuminable.
[2] Use cover plates 2115 J-.../2115-.../6540-... .
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Making-current limiters have to be provided in case of too high making currents.

solo®
Dimmers

Busch-rotary dimmer [1])
Flush-mounted, DALI, tunable white

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. Fool proved.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8). Colour temperature can then be set between 2,700 K - 6,500 K. Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE article no. 2116/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate. Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116 U	2CKA006599A3025	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1]) Flush-mounted, DALI, with internal power supply, tunable white

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8). Colour temperature can then be set between 2,700 K - 6,500 K. With electronic short-circuit protection. With electronic overload protection. Brightness power-on level and backround brightness level adjustable, buffered. With integrated LED illumination for orientation. Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=. Rated current: max. 75 mA
Power consumption: < 2,5 W. Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111. Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116/11 U	2CKA006599A3026	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1]) flush mounted, DALI

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. Fool proved.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
An additional DALI power supply is needed, e.g. by Tridonic, Philips, Helvar or 2117/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117 U-500	2CKA006599A2987	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1])
flush mounted, DALI, with internal power supply

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117/11 U-500	2CKA006599A2988	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

solo®
Dimmers

Cover plate [1]) with rotary knob, with indication lamp

Elevated knob.
With transparent luminous ring.
For Busch-Dimmer®.
For inserts
2112 U-101/2247 U/2250 U/6513 U-102/6517 U-10x/
6519 U/6520 U/6523 U(R)(10x) /6591 U-10x and 6592 U.

Colour	Type	Order code	Pack/Qty.
ivory white	**6540-82-102**	2CKA006599A2951	10/100
studio white	**6540-84-102-500**	2CKA006599A3009	10/100

[1]) Replacement neon lamp, Art. No. 3855.
[2]) Surface painted.

LED dimmer insert flex, 1gang [1]) [2]) [3]) [4]) [5]) [6]) FM, LED, 3-240 VA

2-wire connection (neutral conductor not required). Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA). Touch dimmer for switching lighting systems. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi). For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers. For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps. Mix operaton of LEDi with conventional loads possible. With manually adjustable operating mode: trailing / leading edge control. With adjustable minimum brightness. With light-level memory and minimum brightness memory. Low-noise level by MOSFET transistors. With electronic short-circuit protection. With electronic overload protection. Without control cover. For control element flex, 1gang, 64711. For control element flex, 2gang, 64721. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Rated power: 3-240 VA (LEDi). Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 1. Outputs: 1x dimming channel. Suitable for: 230 V LEDi, typical (leading edge control). Rated power: 3 - 100 VA. Suitable for: 230 V LEDi, typical (trailing edge control). Rated power: 3 - 240 W. Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer. Rated power: 10 - 240 VA.Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1]) In the case of conventional transformers, take ~20% transformer loss into account.
[2]) In case of electronic transformers, 5 % transformer losses.
[3]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4]) Recommendation: Please use loads and types of one producer.
[5]) The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6]) A liability on the part of Buscah-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

solo®
Dimmers

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@ home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Flex control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 2 gang, flex wireless

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@ home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Rocker 1gang, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/ actuator units

Colour	Type	Order code	Pack/Qty.
ivory white	SRD-1-82	2CKA006220A0520	1
studio white	SRD-1-84	2CKA006220A0151	1

Rocker 2gang left, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/ actuator units

Colour	Type	Order code	Pack/Qty.
ivory white	SRD-2-L-82	2CKA006220A0525	1
studio white	SRD-2-L-84	2CKA006220A0166	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/ actuator units

Colour	Type	Order code	Pack/Qty.
ivory white	SRS-2-R-82	2CKA006220A0528	1
studio white	SRS-2-R-84	2CKA006220A0175	1

solo®

ABB flexTronics inserts

Relay insert flex, 1gang [1)]

3 wire connection (neutral conductor required).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 2300 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Relay insert flex, 2gang [1)]

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

solo®

ABB flexTronics inserts

e-contact insert flex, 1gang [1] [2]

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1] Use only dimmable high-voltage LEDs.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6]
FM, LED, 3-240 VA

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA). Touch dimmer for switching lighting systems. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi). For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers. For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps. Mix operaton of LEDi with conventional loads possible. With manually adjustable operating mode: trailing / leading edge control. With adjustable minimum brightness. With light-level memory and minimum brightness memory. Low-noise level by MOSFET transistors. With electronic short-circuit protection. With electronic overload protection. Without control cover. For control element flex, 1gang, 64711. For control element flex, 2gang, 64721. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Rated power: 3-240 VA (LEDi)
Rated voltage: 230 V~, +10 % / -10 % Rated frequency: 50 Hz Inputs: 1. Outputs: 1x dimming channel. Suitable for: 230 V LEDi, typical (leading edge control). Rated power: 3 - 100 VA. Suitable for: 230 V LEDi, typical (trailing edge control). Rated power: 3 - 240 W. Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer. Rated power: 10 - 240 VA. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1.

Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

solo®

ABB flexTronics inserts

	Extension insert flex [1)]		
	3 wire connection (neutral conductor required). For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Control/ Signal outputs: 1, electronic output, potential-bound. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mm		
Colour	**Type**	**Order code**	**Pack/Qty.**
	64891 U-500	2CKA006800A3051	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

solo®

ABB flexTronics comfort switch sensor

Comfort switch flex sensor [1) 2)]

Movement detector push-button switch combination.
For switching lighting systems that depend on brightness and movement.
With select lens, prevents detection of smaller animal.
Push switch function possible at all times.
With notice LED when manual operation is necessary.
Extension of the detection range by main unit/ extension unit combination.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off.
Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off.
Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off.
With continuous light/continuous Off function.
Adjusting elements on rear side.
Surveillance density: 9 sectors with 28 switching segments.
Switch off delay: 1 to 10 min., adjustable.
Compatible with all ABB flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Display elements: LED for status display.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 5 m, lateral: 3 m, at mounting height: 1.1 m.
Detection angle: 170°.
Brightness limit value: 5 Lux - daytime operation.
Operation mounting height: 0.8 m - 1.2 m.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 63 mm x 63 mm x 28 mm.
Above the wall: 21 mm.

Colour	Type	Order code	Pack/Qty.
ivory white	**64765-82-500**	2CKA006800A2885	1
studio white	**64765-84-500**	2CKA006800A2889	1

[1)] The range specifications refer only to an ambient temperature of 21°C.
[2)] Please order the respective flush-mounted insert separately.

Busch-Watchdog 180 flex, basic sensor [1)] [2)] with select-lens

Movement detector sensor with with measurement of ambient light.
For automatic switching of devices dependent on motion and brightness.
Compatible with all free@home flex inserts.
Adjusting elements on rear side.
Extension of the detection range by means of master/ slave combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
With detection display in test mode.
Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
Mounting height: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m. Detection angle: 180 °.
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation.
Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
ivory white	**64761-82-500**	2CKA006800A2923	1
studio white	**64761-84-500**	2CKA006800A2927	1

[1)] Please order the respective flush-mounted insert separately.
[2)] The range specifications refer only to an ambient temperature of 21°C.
[3)] Surface painted.

solo®

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, comfort sensor [1] [2] with select-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With continuous light/continuous Off function. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U. Mounting height: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m. Detection angle: 180 °
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
ivory white	**64762-82-500**	2CKA006800A2960	1
studio white	**64762-84-500**	2CKA006800A2964	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with select-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. ./. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Works with free@home. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U.

Colour	Type	Order code	Pack/Qty.
ivory white	**62762-82-WL-500**	2CKA006200A0168	1
studio white	**62762-84-WL-500**	2CKA006200A0172	1

[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor [1] [2] with multi-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With continuous light/continuous Off function. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 31 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Detection range: frontal: 8 m, lateral: 7 m, Mounting height: 1.1 m. Detection range 2: frontal: 8 m, lateral: 8 m, Mounting height: 2.2 m
Detection angle: 180 °. Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m alternative: 2.2 m. Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
ivory white	**64764-82-500**	2CKA006800A2997	1
studio white	**64764-84-500**	2CKA006800A3001	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with multi-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U.

Colour	Type	Order code	Pack/Qty.
ivory white	62764-82-WL-500	2CKA006200A0236	1
studio white	62764-84-WL-500	2CKA006200A0240	1

[3] Surface painted.

solo®

Blind control / timers

Key Switch Insert [1] [2] [3] breaking circuit, 1-pole

For profile semi-cylindrical lock.
In switched-on and switched-off status the key can be pulled out in the central position, respectively.
Delivered without cylindrical lock.
Rated voltage: 250 V~. Rated current: 10 AX
Suitable for: LEDi / CFLi. Rated power: 100 W
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2733 USL-101	2CKA001101A0914	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Use the cylindrical lock according to the enclosed drawing.
[3] See profile semi-cylindrical lock.

Blind switch insert [1] [2] SP, switch



With interlock.
Rated voltage: 250 V~
Rated current: 10 AX
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/4 US-500	2CKA001012A2197	10/100
	2020/4 US-500	2CKA001413A1103	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] These blind switches/push buttons safely prevent a switch-over of the running direction being carried out too quickly.

Blind switch insert [1] [2]

With rotary knob/switch and push switch.
Rated voltage: 250 V~. Rated current: 10 AX
Suitable for: LEDi / CFLi. Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2712 U	2CKA001101A0534	10
	SP, N, E		
	2713 U	2CKA001101A0542	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2]

With rotary knob/push button.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2722 U	2CKA001101A0559	10
	SP, N, E		
	2723 U	2CKA001101A0567	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch/push-switch [1] [2] [3] [4]

For profile semi-cylindrical lock/switch and push-switch.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2712 USL-101	2CKA001101A0872	10
	SP, N, E		
	2713 USL-101	2CKA001101A0880	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2] [3] [4]

For profile semi-cylindrical lock/push-button.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
British Standard EN 60669-1, IEC60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2722 USL-101	2CKA001101A0898	10
	SP, N, E		
	2723 USL-101	2CKA001101A0906	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

solo®

Blind control / timers

DIN profile-semi cylindrical lock

Acc. to German Standard DIN 18252.
Total length 40 mm
for blind switches and push switches
For inserts 2712/2713/2722/2723/2733 USL-101 and 2712/2733 SLW-5x.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	different lock mechanism, with 3 keys		
	0520 PZ-VS	2CKA000470A0013	1/100
	lock mechanism, with 3 keys		
	0521 PZ-GS	2CKA000470A0021	1/100

Blind compact timer

Suitable for blind and roller blind drives with mechanical or electronic limit switch shut-off. Without extension unit input. Running time: 3 min
N-busbar connection is required.
For manual and time-controlled switching of blinds and roller blinds. Memory function for the simple storage of switching times. The controlled devices can be manually operated at any time. Simple setting via display with with segment display and background illumination.
Factory pre-set switching times, individual adaptations are possible. 2 switching times per day can be freely adjusted for each day of the week. Automatic switchover from summer time to winter time (switch-off function).
Switching times and programs are safely stored in the event of a mains power failure.
Power reserve for time and date > 10 years.
Simple toggling between manual/automatic/vacation modes. See the associated cover plates 6435-xx.
Programming possible only with control element attached and energized.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Outputs: 2x Normally open contact. Rated current: 3 A, cos ϕ 0.5. Rated power: 690 VA
Temperature range (Device): 0 °C to 45 °C

Colour	Type	Order code	Pack/Qty.
	6422 U-500	2CKA006410A0410	1/10

Brightness sensor

For insert 6411U/S-101.
With 2 m connecting cable.
Measuring range: 15-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6414-101	2CKA006410A0389	1/10

Sun sensor

For insert 6411U/S-101.
Measuring range: 5-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6482	2CKA006410A0203	1

solo®

Blind control / timers

Busch-Short-time timer insert [1]) countdown timer

For time-programmed switching of electrical consumers.
With control cover, without cover plate.
Minimum timer time: 1 second.
Maximum timer time: 9:59:59 hours.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 1x Normally open contact
Rated current: 10 A, cos ϕ 1
Rated power: 2300 VA
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6465 U-101-500	2CKA006410A0393	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
Cover frames:	1gang frame 1721 BS-2xG or Dual Box frame 1722 BSDB-2xG.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker with marking

As cover for flush-mounted blind control switch/push switch.
For inserts 2000/4 and 2020/4 US.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1785 JA-82**	2CKA001751A2748	10
studio white	**1785 JA-84-500**	2CKA001751A3088	10/100

[1]) Surface painted.

Cover plate with rotary control, with marking

As cover for flush-mounted blind control switch/push switch.
For inserts 2712 U, 2713 U and 2722 U, 2723 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1740-82**	2CKA001710A3154	10
studio white	**1740-84**	2CKA001710A3172	10/100

[1]) Surface painted.

Cover plate [1]) with labelling field

With marking.
For half-cylindrical type switches and blind control switch/push-switch.
For inserts 2733 USL-101 and 2712 USL-101, 2713 USL-101, 2722 USL-101, 2723 USL-101.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1755 SL/PZ-82-101**	2CKA001710A3157	10
studio white	**1755 SL/PZ-84-101**	2CKA001710A3175	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Control element

For Busch-Blind control II insert 6411 U-101, 6411 U/S-101.
For basic blind insert 6418 U.
For Busch-Universal 2gang 1way insert 6402 U.

Colour	Type	Order code	Pack/Qty.
ivory white	**6430-82-102**	2CKA006430A0327	1/10

[1]) Surface painted.

solo®

Blind control / timers

Time switch mechanism 16 A [1] [2] DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 15 min
For time-programmed switching of electrical consumers.
Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird.
Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist.
Rated voltage: 230 V~, +10 % / -10 %
Rated current: 16 A, cos ϕ 0.25
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1070 U	2CKA001043A0025	1/10

[1] For screw-fixing only
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Time switch mechanism 16 A [1] [2] DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 120 min
For time-programmed switching of electrical consumers.
Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird.
Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist.
Rated voltage: 230 V~, +10 % / -10 %
Rated current: 16 A, cos ϕ 0.25
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1071 U	2CKA001043A0124	1

[1] For screw-fixing only
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate

For room thermostats 1098 U-101 and 1098 UF-101.
For short-time timer 6465 U-101.
For Busch-CO2 sensor 1091 U-500.
For blind compact timer 6422 U.

Colour	Type	Order code	Pack/Qty.
ivory white	**6435-82**	2CKA006430A0304	10
studio white	**6435-84**	2CKA006430A0306	10

[1] Surface painted.

Cover plate with rotary knob, with marking

For Busch-Timer insert 1070 U.
Running time: 15 min
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1770-82-103**	2CKA001753A0256	10
studio white	**1770-84-103**	2CKA001753A0258	10

[1] Surface painted.

Cover plate with rotary knob, with marking

For Busch-Timer insert 1071 U.
Running time: 120 min
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1771-82-103**	2CKA001753A0266	10
studio white	**1771-84-103**	2CKA001753A0301	10

[1] Surface painted.

solo®

Blind control / timers

Blind insert, 1 gang, 2 way flex

3 wire connection (neutral conductor required).
For the control of roller shutters, blind and awning motors with mechanical or electronic limit switch shut-off.
Group formation via extension input possible.
Operation also via conventional push buttons (2020 US non-illuminated/2021/6 UK) possible.
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.

Colour	Type	Order code	Pack/Qty.
	64831 U-500	2CKA006400A0096	1

Extension insert flex

3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations.
For group control of flex inserts via extension unit communication.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with all flex inserts.

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

Control element, 1 gang flex

Tapping control element, 1gang.
Compatible with all free@home flex inserts.
For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang.
For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads.
Compatible with all free@home flex inserts.
Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point.
Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Control element, 2 gang flex

Tapping control element, 2gang.
For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx.
For saving and calling up 2 scenes via the right rocker.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 1 gang, flex wireless

Tapping control element, 2gang.
For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads.
Compatible with all free@home flex inserts.
Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point.
Timer with Astro function.
For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx.
For saving and calling up 2 scenes via the right rocker.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

solo®

Blind control / timers

Weather Station

For recording and transmitting of brightness, temperature, wind speed and rain.
Weather data can be linked with actuators to automatically control functions.
Weather data can be visualized in the free@home web interface and the free@home app.
Remote operation via the Bluetooth and smartphone/ tablet app.

Colour	Type	Order code	Pack/Qty.
	WS-1-WL.1	2CKA006200A0297	1

Standard Inputs

WS-1/A1.1 Mast adapter weather station

Colour	Type	Order code	Pack/Qty.
	WS-1/A1.1	2CKA006200A0848	1

Rocker 1gang, with “Blind” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
ivory white	SRB-1-82	2CKA006220A0518	1
studio white	SRB-1-84	2CKA006220A0145	1

Rocker 2gang left/right, “Blind” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
ivory white	SRB-2-82	2CKA006220A0523	1
studio white	SRB-2-84	2CKA006220A0160	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
ivory white	SRS-2-R-82	2CKA006220A0528	1
studio white	SRS-2-R-84	2CKA006220A0175	1

solo®
Socket outlets

SCHUKO® socket outlet with screwless terminals

DP (2 P + E)
Rated voltage: 250 V~
Supply voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUC-82-500**	2CKA002011A6214	10/100
studio white	**20 EUC-84-500**	2CKA002011A6207	10/100

[1] Surface painted.

SCHUKO® socket outlet [1] shuttered

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUCKS-82-500**	2CKA002013A5376	10/100
studio white	**20 EUCKS-84-500**	2CKA002013A5372	10/100

[1] Increased shock protection.
[2] Surface painted.

SCHUKO® socket outlet without claw [1] shuttered

Without claws.
With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUCRB-82**	2CKA002013A5438	10/100
studio white	**20 EUCRB-84-500**	2CKA002013A5441	10/100

[1] Increased shock protection.
[2] Surface painted.

SCHUKO® socket outlet [1] [2] shuttered

With screw-type terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2300 EUCB-82**	2CKA002013A5449	10/100
studio white	**2300 EUCB-84**	2CKA002013A5451	10/100

[1] Increased shock protection.
[2] With screw-type terminals
[3] Surface painted.

SCHUKO® socket outlet [1] [2] shuttered

With screw-type terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
ivory white	**23 EUCB-82**	2CKA002013A5475	10
studio white	**23 EUCB-84**	2CKA002013A5477	10/100

[1] Increased shock protection.
[2] With screw-type terminal for rigid and flexible wires
[3] Surface painted.

SCHUKO® USB socket outlet, 2gang [1] [2] [3] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the SCHUKO® socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUCB2USBAC-82-500**	2CKA002011A6303	1/10
studio white	**20 EUCB2USBAC-84-500**	2CKA002011A6307	1/10

[1] Increased shock protection.
[2] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[3] No data transfer.

solo®
Socket outlets

Busch-Socket outlet [1]) shuttered

With screwless terminals.
DP (2 P + E)
With eject mechanism.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUCBDR-82**	2CKA002013A5416	10
studio white	**20 EUCBDR-84**	2CKA002013A5418	10

[1]) Increased shock protection.
[2]) Surface painted.

SCHUKO® socket outlet steplight® [1]) With night orientation light

With separate connection cables for switch contact.
With LED, Shuttered.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUCBLI-82**	2CKA002013A5292	1
studio white	**20 EUCBLI-84**	2CKA002013A5294	1

[1]) Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2]) Surface painted.

SCHUKO® socket outlet [1]) with labelling field

DP (2 P + E)
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUN-82**	2CKA002011A3726	10
studio white	**20 EUN-84-500**	2CKA002011A6209	10/100

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

SCHUKO® socket outlet [1]) [2]) with label field, increased shock protection

Size of labelling field: 60 x 9 mm.
With screwless terminals.
DP (2 P + E)
Shuttered.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUCNB-82**	2CKA002013A5428	10
studio white	**20 EUCNB-84-500**	2CKA002013A5431	10/100

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Increased shock protection.
[3]) Surface painted.

SCHUKO® socket outlet [1]) with marking "EDV"

With screwless terminals.
DP (2 P + E)
Shuttered.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUCKS/DV-82**	2CKA002013A5267	10
studio white	**20 EUCKS/DV-84**	2CKA002013A5268	10

[1]) Increased shock protection.
[2]) Surface painted.

Busch-Protector® SCHUKO® socket outlet [1]) with overvoltage protection

DP (2 P + E). With integrated and external signalling contact. ISN = 5 kA
Device protection for technical sensitive equipment such as computer, entertainment electronics and building management systems.
Effectively reduces overvoltage peaks occurring between the sub-distribution switch board and SCHUKO® socket outlet. Arrestor test class: classification Type 2. Rated voltage: 250 V~. Secondary: 250 V~. Rated current: 16 A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2310 EUGL/VA-82-11**	2CKA002011A3831	1
studio white	**2310 EUGL/VA-84-11**	2CKA002011A3833	1
red RAL 3020	**2310 EUGL/ VA-12-82-101**	2CKA002011A6257	1/10

[1]) Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2]) Surface painted.

SCHUKO® socket outlet with LED control light

Shuttered. DP (2 P + E)
With transparent lens.
LED colour green.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUCBL-82**	2CKA002013A5284	10
studio white	**20 EUCBL-84**	2CKA002013A5286	10

[1]) Surface painted.

SCHUKO® socket outlet with marking

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

green, RAL 6032	**20 EUC-13-82-101**	2CKA002011A6260	10
orange RAL 2004	**20 EUC-14-82**	2CKA002011A3723	10

solo®
Socket outlets

Busch-Object socket outlet [1]) shuttered

With screwless terminals.
DP (2 P + E)
Incl. Cover plate with extract mechanism.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUAB-82**	2CKA002013A5405	10
studio white	**20 EUAB-84**	2CKA002013A5407	10

[1]) Increased shock protection .
[2]) Surface painted.

FI-SCHUKOMAT, SCHUKO® socket outlet (RCD) [1]) [2]) [3]) with earth leakage circuit breaker

Shuttered.
DP cut off (P,N)
Without PE monitoring.
With output terminals for connecting and protecting downsream SCHUKO® socket outlets.
Rated fault current: 30 mA.
With fixing claws.
Rated frequency: 45-60 Hz.
Rated voltage: 230 V~
Rated current: 16 A
Protection class (Device): IP 20
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
ivory white	**3120 EUCB-82**	2CKA003116A0661	1
studio white	**3120 EUCB-84**	2CKA003116A0662	1

[1]) Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2]) Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.
[3]) Increased shock protection .
[4]) Surface painted.

Buschmat® FI - Insert [1]) with earth leakage breaker with connecting conductor

Protection of downstream consumers.
Rated fault current: 30 mA.
DP cut off (P,N)
With fixing claws.
Rated frequency: 45-60 Hz.
Rated voltage: 230 V~
Rated current: 16 A
Protection class (Device): IP 20
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
ivory white	**3151 UC-82**	2CKA003117A0005	1/10
studio white	**3151 UC-84**	2CKA003117A0006	1/10

[1]) Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.
[2]) Surface painted.

SCHUKO® socket outlet with hinged lid

With screwless terminals.
DP (2 P + E)
Hinged lid notches when opened.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUK-82**	2CKA002018A1465	10
studio white	**20 EUK-84-500**	2CKA002018A1509	10/100

[1]) Surface painted.

SCHUKO® socket outlet [1]) with hinged lid and internal increased shock protection

Shuttered.
With screwless terminals.
DP (2 P + E)
with hinged lid
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUKB-82**	2CKA002018A1518	10/100
studio white	**20 EUKB-84**	2CKA002018A1520	10/100
ivory [3])	**20 EUKBR-82**	2CKA002018A1527	10/100
studio white [3])	**20 EUKBR-84**	2CKA002018A1529	10/100

[1]) Increased shock protection .
[2]) Surface painted.
[3]) Without claw.

SCHUKO® socket outlet [1]) [2]) [3]) with hinged lid and labelling field

Shuttered.
With screwless terminals.
DP (2 P + E)
with hinged lid
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUKNB-82**	2CKA002018A1538	10/100
studio white	**20 EUKNB-84**	2CKA002018A1540	10/100

[1]) Increased shock protection .
[2]) The labels are clamped under the labelling field.
[3]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4]) Surface painted.

solo®
Socket outlets

SCHUKO® socket outlet [1]) with hinged lid and lock

Shuttered.
With screwless terminals.
DP (2 P + E)
With different lock mechanism.
Delivery includes 2 keys.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUKNBSL-82**	2CKA002018A1559	10
studio white	**20 EUKNBSL-84**	2CKA002018A1563	10

[1]) Increased shock protection .
[2]) Surface painted.

SCHUKO® socket outlet [1]) with hinged lid and lock

Shuttered.
With screwless terminals.
DP (2 P + E)
With evenly engaging lock.
Delivery includes 2 keys.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUKNBSL-82-101**	2CKA002018A1560	10
studio white	**20 EUKNBSL-84-101**	2CKA002018A1564	10

[1]) Increased shock protection .
[2]) Surface painted.

SCHUKO® socket outlet [1]) [2]) [3]) with hinged lid, labelling field and LED control light

Shuttered.
With screwless terminals.
DP (2 P + E)
with hinged lid
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**20 EUKNBL-82**	2CKA002018A1549	10/100
studio white	**20 EUKNBL-84**	2CKA002018A1551	10/100

[1]) Increased shock protection .
[2]) The labels are clamped under the labelling field.
[3]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4]) Surface painted.

Socket outlet [1]) shuttered

Without claws.
With screw-type terminals.
DP
Suitable for 1gang flush-mounted boxes.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
ivory white	**2300 UCRKS-82-503**	2CKA002113A0510	10
studio white	**2300 UCRKS-84-503**	2CKA002113A0511	10

[1]) Increased shock protection .
[2]) Surface painted.

USB socket outlet earthing pin, 2gang [1]) [2]) shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the pin earth socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
ivory white	**20 MUCB2USBAC-82-500**	2CKA002017A1914	1/10
studio white	**20 MUCB2USBAC-84-500**	2CKA002017A1916	1/10

[1]) increased shock protection.
[2]) No data transfer.

solo®
Socket outlets

Shaver socket outlet

For installation into FM 2gang wall box 3030 and 3031.
Rated voltage: 240 V, +10 % / -10 %
Output voltage: 115 V, +10 % / -10 %
Secondary: 240 V, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 20 VA

Colour	Type	Order code	Pack/Qty.
ivory	**2332 UJBS-82**	2CKA002130A0290	1
studio white	**2332 UJBS-84**	2CKA002130A0292	1

[1] Surface painted.

Flush-mounting wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 135 mm x 75 mm x 47 mm

Colour	Type	Order code	Pack/Qty.
	3030	2CKA001741A0067	4

Flush-mounting cavity wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 142 mm x 75 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
	3031	2CKA001741A0068	4

13 A Switched socket outlet

1gang
With screw-type terminals.
SP switched
Without claws.
Only for mounting in VDE flush-mounted wallboxes CFB 122 and CFBM 122.
Rated voltage: 250 V~
Rated current: 13 ABS 1363: part2

Colour	Type	Order code	Pack/Qty.
ivory	**2190 EUC-82**	2CKA002190A0213	10/100
studio white	**2190 EUC-84**	2CKA002190A0215	10/100

[1] Surface painted.

2gang European/American socket outlet, 10A

2gang
With screw-type terminals.
SP switched
Without claws.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
ivory white	**2192-02 UC-82-500**		
	delivery on request		
studio white	**2192-02 UC-84-500**		

Socket outlet [1]) with earth pin

With screwless terminals.
Suitable for the countries: Belgium, Poland, Czech Republic.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	20 M-500	2CKA002017A0854	10/100

[1] Insert can be used for all covers 2399 UCKS-xx.

Socket outlet cover frame shuttered

For socket outlet insert 20 M-500.
Rated voltage: 250 V~

Colour	Type	Order code	Pack/Qty.
ivory	**2399 UCKS-82**	2CKA002099A0211	10
studio white	**2399 UCKS-84**	2CKA002099A0214	10

[1] Surface painted.

Chinese socket outlet, 10 A

1gang
With screw-type terminals.
Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 10 A
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
ivory white	**2193 EUC/10-82-500**		
	delivery on request		
studio white	**2193 EUC/10-84-500**		

solo®

Socket outlets

Chinese socket outlet, 16 A

1gang
With screw-type terminals.
Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
ivory white	**2196 EUC/16-82-500**		
	delivery on request		
studio white	**2193 EUC/16-84-500**		

Chinese and Euro American socket outlet, 10 A

1gang
With screw-type terminals.
Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
ivory white	**2195 EUC/10-82-500**		
	delivery on request		
studio white	**2195 EUC/10-84-500**		

International socket outlet 13A [1])

1gang
With screw-type terminals.
Without claws.
Rated voltage: 250 V~
Rated current: 13 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
ivory white	**2197 EUC-82-500**		
	delivery on request		
studio white	**2197 EUC-84-500**		

[1]) Usage may be restricted in certain countries.

Euro American socket outlet with earth, 16 A

1gang
With screw-type terminals.
Without claws.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
ivory white	**2196 EUC-82-500**		
	delivery on request		
studio white	**2196 EUC-84-500**		

Data communication

Universal data connection unit, cat. 3 [1]) 1gang

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0213-500	2CKA000230A1549	10/100

[1]) Suitable for cover plate 1803-xxx.

Universal data connection box with down-leading outlet [1]) 2gang internally parallel connected

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0214	2CKA000230A0235	10/100
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Universal data connection box with down-leading outlet [1]) 2 x outlets, 8/8-pole

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0215	2CKA000230A0243	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

solo®
Data communication

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 1gang

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without claws. Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/11-101	2CKA000230A0409	1/10

[1]) Suitable for cover plate 1803-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 2 x outlets, 8/8-pole

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For wires of AWG 24-22.
Without claws.
Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/12-101	2CKA000230A0411	1/10

[1]) Suitable for cover plate 1803-02-xxx.

Universal data connection box 8(6)/ telephone unit 6F+N - connection box [1]) 2 x 6-pole



with straight outlet,
with screw contacts,
Universal data-connection boxes: RJ 11/12,
ISDN capable Cat. 3 in acc. with IEC 603-7/German Standard DIN EN 60603-7,
Telecommunication outlet (telephone unit): for 1 telephone, 1 auxiliary device or 1 data transmission unit,
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**UAE 8(6)TAE 6 F+N**	2CKA000230A0381	10/100

[1]) Suitable for cover plate 2539-xxx, 1766-xxx and 1746-2xx-FN.

Satellite co-axial outlets 2 connectors/dead-end feeder

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0230-101	2CKA000230A0250	10/100

Antenna socket insert Radio/TV 2 connectors/loop through type

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw. Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0231-101	2CKA000230A0268	10/100

Satellite co-axial outlets Radio/TV/SAT 3gang dead-end feeder

Broadband technology 47-2.150 MHz.
SAT connection designed as screwable F-male plug.
with remote feed via F-bush
For DVB-T and broadband-cable-systems.
For analogue and digital transmission.
With claw. Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0232-101-500	2CKA000230A0463	10/100

solo®

Data communication

Terminating resistor 75 Ohm

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0239	2CKA000230A0201	10/100

Mounting plate [1] [2] with green insert



For 2 modular jack inserts.
For systems: CommScope (AVAYA / AT&T / Lucent Technologies), GigaSPEED, PowerSUM, 360 GS 10E bis MGS 600-BK, M1 BH-xx, MPS 100E-xx.
With R&M adapter R310694 suitable for R&M connection modules R305111, R305112, R305113 and R305114.
Pitch dimensions: (WxH) approx. 16.9 x 17.9 mm.
Without claws. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1810-500	2CKA001753A9974	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with red insert



For 2 modular jack inserts.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
For systems: AMP / tyco Electronics, BTR, EFB, Krone, Panduit, Quante, Radiall, Setec, Dr.-Ing. Sieger, Telena, Thomas & Betts For Telegärtner AMJ/UMJ connection modules/couplings. For 2 fiber optic modules of the following types: 3M-Volition, Krone, mvk.
Pitch dimensions: (WxH) approx. 14.8 x 19.4 mm.
Without claws. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1812-500	2CKA001753A9972	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with black insert

For MTRJ or 2 modular jack inserts.
For systems: Ackermann, AMP / tyco Electronics (Slim Line (SL) -SM 2gang/switches: 110Connect Jacks, Toolless Jacks / Standard 110Connect Jacks), Brand-Rex, CombiNet, EFB Electronic, Telena.
For 2 fiber optic modules of the following types: AMP / tyco Electronics MTRJ.
Pitch dimensions: (WxH) approx. 14.8 x 20.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1814-500	2CKA001753A9973	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with orange base

For 2 modular jack inserts.
For system: LexCom 150 and LexCom 250.
Pitch dimensions: (WxH) approx. 15.4 x 15.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1819	2CKA001753A8056	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with grey base

For 2 modular jack inserts.
For system: Panduit MiniCom (Cu. z.B. TX6 10 Gig Shielded Jack modules and fiber optic modules.
Pitch dimensions: (WxH) approx. 15.9 x 18.7 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1820	2CKA001753A8057	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Flush-mounted assembly adapter

For the accommodation of one or two universal modules 0219.
For flush-mounted installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/12	2CKA000230A0395	1/10

Channel assembly adapter

For the accommodation of one or two universal modules 0219.
For channel and under-floor installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/13	2CKA000230A0396	1/10

solo®
Data communication

Universal module, RJ 45, cat. 6a iso, shielded [1]) 1gang

For installation in installation adapter 0219/12 or 0219/13.
Also suited for mounting into cover plate 2561-xxx, 2564-02-xxx and bases 1812, 1866 EB, and 1867 EB.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Cat. 6A according to ISO/IEC 11801: 2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Bend-radius optimised cable feed (30°).
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
For 8-pole plug RJ 45 only.
Housing made from diecast zinc.
With integrated dust-protection cap (can be removed if necessary).
With insulation displacement connection
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219-101	2CKA000230A0413	1/10

[1]) With assembly adapters appropriate for telephone unit cover plates 2539-21x and 1766-xxx.

Modular-Jack insert 6-pole Cat. 3 (AMP-No. 216000-2)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0210	2CKA000225A0078	10

Modular-Jack insert 8-pole Cat. 3 (AMP-No. 216005-4)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0211	2CKA000225A0086	10

Built-in jack

For potential balancing jack cover plate and installation in cover plates.
For devices of 19 mm diameter.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0471-0-0037	2CKA000471A0037	10

Potential balancing plug

Suitable for plug 2095 UC-212 and built-in jack 0471-0-0037 acc. to German Standard DIN 42801.
For potential balancing jack cover plate (connection up to 6 mm² crimped or soldered)
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0299-0-0032	2CKA000299A0032	10

Blank plate with metal mounting plate

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1742-82**	2CKA001710A3143	10
studio white	**1742-84-500**	2CKA001710A3991	10/100

[1]) Surface painted.

Cover plate [1]) with metal mounting plate

As cover for flex outlet, for cords up to 10.3 mm diameter.
With strain relief (without terminal block).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1749-82**	2CKA001710A3145	10
studio white	**1749-84**	2CKA001710A3163	10/100

[1]) Cover plate can also be used individually as cover for telephone connector boxes (VDo).
[2]) Surface painted.

solo®
Data communication

Cover plate [1])

As cover for universal data connection boxes.
Art.-No. 0213 (Cat 3/ISDN), 0216-101, 0218/11-101 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
For WLAN access points 8186/31 and 8186/41.
Brand-Rex (WAEGV 8 EKR/EK).
BTR (universal data connecting unit design and IAE design).
Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.
With labelling field.
Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1803-82**	2CKA001710A3147	10
studio white	**1803-84-500**	2CKA001710A1550	10/100

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Cover plate [1]) 2gang

As cover for universal data connection boxes.
Art. No. 0214, 0215 (Cat 3), 0220/12-507, 0221/12-507, 0218, 0217 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
Brand-Rex (WAEGV 8/8 EKR/EK).
AMP (NETCONNECT 5E).
BTR (E-DAT C6, E-DAT design, Universal data connecting unit design and IAE design).
cti (cti-wire 2.8 Cat.6).
Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.
With labelling field.
Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1803-02-82**	2CKA001710A3146	10
studio white	**1803-02-84-500**	2CKA001710A1551	10/100

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter. USB power adapter insert 6475 U-500.
For loudspeaker connection box.
Suitable for part number 0248/0x-101.
For data modules. Suitable for Art. No. 0219/12 and 0219/13. For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1766-82**	2CKA001710A3144	10/100
studio white	**1766-84-500**	2CKA001710A3992	10/100

[1]) Surface painted.

Cover plate

As cover for telephone connector boxes (VDo).
Can be knocked out for single or double connection.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1745-82**	2CKA001710A3155	10
studio white	**1745-84**	2CKA001710A3173	10

[1]) Surface painted.

Cover plate [1]) socket outlet

Telephone socket (TDO)

Colour	Type	Order code	Pack/Qty.
ivory white	**1762-82-506**	2CKA001710A4104	10/100
studio white	**1762-84-506**	2CKA001710A4106	10/100

[1]) Suitable insert: TDO 3x 10 OUP (for 1 telephone and 2 auxiliary devices).
[2]) Surface painted.

Cover plate [1]) [2])
as cover for standard Radio/TV/SAT socket outlets

With 2 connectors
Acc. to German Standard DIN 45330.
Radio/TV/SAT.
With M3 fixing screw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1743-82**	2CKA001724A2758	10
studio white	**1743-84-500**	2CKA001724A4332	10/100

[1]) Third opening can be knocked out.
[2]) See inserts for satellite coaxial socket outlets.
[3]) Surface painted.

Cover plate

As cover for 4gang Satellite co-axial socket outlet EVU 02 F, GEVU 15 S from Hirschmann.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1743-04-82**	2CKA001724A4375	10
studio white	**1743-04-84**	2CKA001724A4377	10

[1]) Surface painted.

solo®

Data communication

Cover plate

As cover for 4gang Satellite co-axial socket outlet SAT400/EAS/DC, EAS 405, 413 DAS from Ankaro.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1743/10-04-82**	2CKA001724A4366	10
studio white	**1743/10-04-84**	2CKA001724A4368	10/100

[1] Surface painted.

Cover plate [1]) with labelling field

For modular jack with slide entrance.
To fit only Art. No. 1810, 1812, 1814, 1816, 1818, 1819 and 1820.
Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1800-82**	2CKA001710A3158	10
studio white	**1800-84-500**	2CKA001710A3990	10/100

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Surface painted.

Cover plate

For 1 modular jack.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2561-82**	2CKA001753A0401	10
studio white	**2561-84**	2CKA001753A0403	10

[1] Surface painted.

Cover plate

For 2 modular jack inserts.
Suitable for Art. No. 0210 and 0211.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2561-02-82**	2CKA001753A0392	10
studio white	**2561-02-84**	2CKA001753A0394	10

[1] Surface painted.

Cover plate

For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1746/10-82**	2CKA001710A3521	10
studio white	**1746/10-84-500**	2CKA001710A3993	10/100

[1] Surface painted.

Intermediate ring Reflex SI/SI Linear

For fitting cover plates from the Busch-Duro 2000® SI and Reflex SI range.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1747 SI-82**	2CKA001710A3862	10
studio white	**1747 SI-84**	2CKA001710A3863	10

Intermediate ring Busch-balance® SI

For attaching cover plates from the Busch-balance® SI range.
Delivery without cover plate.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1747 BSI-82**	2CKA001710A4094	10
studio white	**1747 BSI-84**	2CKA001710A4096	10/100

[1] Surface painted.

Cover plate

For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1746-82**	2CKA001710A3149	10
studio white	**1746-84**	2CKA001710A3167	10

[1] Surface painted.

solo®

Data communication

Intermediate ring with hinged lid [1]) Busch-balance® SI

For attaching cover plates from the Busch-balance® SI range.
Delivery without cover plate.
With sealing ring.
With hinged lid.
Protection class (Device): IP 44
Dimensions: (L x W x D): 63 mm x 63 mm x 20 mm

Colour	Type	Order code	Pack/Qty.
ivory white	**2518-WD-82**	2CKA001719A0218	10
studio white	**2518-WD-84**	2CKA001719A0220	10

[1]) Combinable only with covers for flush-mounted inserts
[2]) Surface painted.

XLR centre plate

As cover for Neutrik plug connectors, type D series.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2553-82**	2CKA001724A4400	10
studio white	**2553-84**	2CKA001724A4402	10

[1]) Surface painted.

Equipotential socket outlet 2gang

Without claws.
For connecting wires up to 1 x 6 mm² and 4 x 2.5 mm².
IEC 60601-1:2005; DIN EN 60601 (VDE 0750-1): July 2007
Connection bolts German Standard DIN 42801.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2095 UC-82**	2CKA002495A0085	10
studio white	**2095 UC-84**	2CKA002495A0086	10

[1]) Surface painted.

Cover plate with metal mounting plate

With screw-type terminal.
Fixed with central locknut.
As cover for pilot devices with a diameter of 22.5 mm
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**2533-82**	2CKA001724A4255	10
yellow	**2533-82-15**	2CKA001724A4382	10
studio white	**2533-84**	2CKA001724A4256	10

[1]) Surface painted.

Cover plate [1]) with metal mounting plate

For communication devices.
With labelling field 60.2 x 10.2 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1758-82**	2CKA001724A2759	10
studio white	**1758-84**	2CKA001724A2761	10/100

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

solo®

Multimedia / communication adapters

Busch-Radio DAB+ [1])

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Control/Signal outputs: 2, Loudspeaker output, impedance 4 Ohm
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8215 U-101-500	2CKA008200A0276	1/10

[1]) No claw. Screw-fixing via keyholes.

Busch-Radio BTconnect DAB+ [1])
With Bluetooth interface for music replay

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
With Bluetooth interface for music replay of mobile devices.
Connection of external Bluetooth loudspeakers possible.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Bluetooth specification: 4.2.
Bluetooth profiles supported: A2DP
Number of stored Bluetooth connections: max. 8
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Bluetooth

Colour	Type	Order code	Pack/Qty.
	8217 U-101-500	2CKA008200A0279	1/10

[1]) No claw. Screw-fixing via keyholes.

solo®

Multimedia / communication adapters

Loudspeaker insert [1] 5 cm (2")

With flat plug connector.
With broadband characteristics.
Rated output: 2 W (RMS)
Incl. speaker connection cable.
Frequency response: 200 - 20,000 Hz
Impedance: 4 Ohm
Protection class (Device): IP 20, SELV
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1/10

[1] No claw. Screw-fixing via keyholes.

Flush Mounted Inserts Flush-mounted installation boxes and inserts

Multi media connector ins.

Colour	Type	Order code	Pack/Qty.
	8231 U	2CKA008200A0223	1/10

[1] No claw. Screw-fixing via keyholes.

USB power adapter insert, flush-mounted [1] [2] With USB-A & USB-C interface



For supply and support of mobile devices via USB-cable.
With USB type A and USB type C female connector.
To support two devices at the same time.
Supports automatic negotiating of optimum charging parameters for the shortest charging times.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Outputs: 2x USB charging interface
Suitable for: Only USB-A bus occupied:
Rated current: 3000 mA
Output voltage: 5 V-
Suitable for: Only USB-C bus occupied:
Rated power: 18 W
Suitable for: USB-A and USB-C bus occupied. Total:
Rated current: 3250 mA
Output voltage: 5 V-
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.

65 W power adapter insert, flush-mounted [1] [2] with USB-C interface

NEW

For power and charge of mobile devices via USB-C cable.
With USB type C female connector. Supports high power and automatic negotiating of optimum charging parameters for the shortest charging times.
Support of charging protocols: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the Qualcomm quick charge protocols: QC 2.0, 3.0, 4.0 and 5.
Support of USB PD (power delivery): 3.1 incl. PPS (programmable power supply).
Support of manufacturer specific protocolls: Samsung AFC and Huawei FCP (with 20 W).
With electronic short-circuit protection.
With electronic overload protection.
Fitting cover plate: 6479-...-500.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Power loss: < 75 mW
Outputs: 1x USB-C charging interface
Rated power: 65 W
Output voltage: 5 V, 9 V, 12 V, 15 V, 20.0 V DC
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 44 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6479 U-500	2CKA006400A0437	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.

HDMI connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link high-definition digital audio and video data from e.g. SAT-receiver, DVD-/Blue-Ray-player to plasma-type, LCD- or-LED-TVs/screens.
HDMI-type A, 3D-compatible.
Fully HD ready (1920 x 1080 pixel).
For 20-wire HDMI-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/31-500**	2CKA000230A0430	1
grey	**0261/33-500**	2CKA000230A0432	1
alpine white	**0261/32-500**	2CKA000230A0431	1

[1] Please follow the recommendations of the cable and device producers for the max. HDMI cable lengths.

solo®

Multimedia / communication adapters

VGA connection unit [1])
with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To link analogue video data between PCs and laptops to monitors or digital projectors etc. VGA-type: D-type, 15-pole. Fully HD ready (1920 x 1080 pixel). For 15-wire VGA-cables via srew-type terminals. For trunk systems, flush-mounted wall boxes and underfloor systems. For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended. Without cover plate. Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/21-500**	2CKA000230A0424	1
grey	**0261/23-500**	2CKA000230A0426	1
alpine white	**0261/22-500**	2CKA000230A0425	1

[1]) Please follow the recommendations of the cable and device producers for the max. VGA cable lengths.

USB connection unit [1])
with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To link mobile devices like e.g. printer, scanner, USB-sticks or digital cameras etc. USB-type A, USB 2.0 compatible. For 5-wire USB- cables via srew-type terminals. For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate. Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/11-500**	2CKA000230A0418	1
grey	**0261/13-500**	2CKA000230A0420	1
alpine white	**0261/12-500**	2CKA000230A0419	1

[1]) Please follow the recommendations of the cable and device producers for the max. USB cable lengths.

Communication adapter for BNC-F Duct-jacks

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0262/11-500**	2CKA000230A0436	1
grey	**0262/13-500**	2CKA000230A0438	1
alpine white	**0262/12-500**	2CKA000230A0437	1

F duct-jack for communication adapter

For connection of antenna cables e.g.. for TVs with integrated TV-tuner and satellite receiver.
With screw-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**0262-500**	2CKA000230A0440	1

Communication adapter for Cinch-jacks



Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems. Without cover plate.
Without claws. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0263/11-500**	2CKA000230A0444	1
grey	**0263/13-500**	2CKA000230A0446	1
alpine white	**0263/12-500**	2CKA000230A0445	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets. Audio-band 20Hz - 20kHz.
Marked white: audio , channel left. With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
alpine white	**0263/04-500**	2CKA000230A0451	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked black: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
black	**0263/05-500**	2CKA000230A0452	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked red: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Red	**0263/06-500**	2CKA000230A0453	1

solo®

Multimedia / communication adapters

Cinch-jacks for communication adapter

For connecting analogue video devices, such as DVD players, hard disc recorders, video recorders or receivers.
Marked yellow: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
yellow	**0263/07-500**	2CKA000230A0454	1

Communication adapter for Mini-jacks 3,5mm

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0264/11-500**	2CKA000230A0458	1
grey	**0264/13-500**	2CKA000230A0460	1
alpine white	**0264/12-500**	2CKA000230A0459	1

Mini-jack 3,5 mm for communication adapter

For the connection of mobile terminal devices such as MP3 player (stereo), mobile telephone and smartphones.
Audio-band 20Hz - 20kHz. With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
chrome gloss	**0264-500**	2CKA000230A0462	1

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0248/02-101**	2CKA000230A0402	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**0248/05-101**	2CKA000230A0404	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Cover plate

For Busch-Radio DAB+ 8215 U-101.
For Busch-Radio BTconnect DAB+ 8217 U-101.
For Busch-Radio iNet 8216 U.

Colour	Type	Order code	Pack/Qty.
ivory white	**8252-82-101-500**	2CKA008200A0251	10
studio white	**8252-84-101-500**	2CKA008200A0255	10

[1]) Surface painted.

Cover plate

For loudspeaker insert 8223 U.

Colour	Type	Order code	Pack/Qty.
ivory white	**8253-82**	2CKA008200A0079	1/10
studio white	**8253-84**	2CKA008200A0081	1/10

[1]) Surface painted.

CoverPlates (partly incl. Insert) Hotel application

C-plate media connector.

Colour	Type	Order code	Pack/Qty.
ivory white	**8256-84**	2CKA008200A0224	1/10
studio white	**8256-82**	2CKA008200A0229	1/10

[1]) Surface painted.

solo®

Multimedia / communication adapters

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter. USB power adapter insert 6475 U-500.
For loudspeaker connection box.
Suitable for part number 0248/0x-101.
For data modules. Suitable for Art. No. 0219/12 and 0219/13. For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1766-82**	2CKA001710A3144	10/100
studio white	**1766-84-500**	2CKA001710A3992	10/100

Cover plate for power adapter insert

NEW

Cover plate for USB-C 65 W power adapter 6479 U-500.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**6479-82-500**	2CKA006400A0446	1
studio white	**6479-84-500**	2CKA006400A0450	1

Cover plate

With fixing claws.
loudspeaker inserts and cover.
With soldering tag.
For covering universal data communication connectors and circular connectors with screwed plug M 16x0.75 (installable in insert) in accordance with DIN 41524, 41529, 45322, 45327, 45328 and 45329.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1751-82**	2CKA001723A0239	10
studio white	**1751-84**	2CKA001723A0240	10/100

[1] Surface painted.

Cover plate with rotary control, with marking

As a cover for volume controllers.
Suitable for the >LR mono BJ FM< devices of WHD.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1740 DR/03-82**	2CKA001710A3807	10
studio white	**1740 DR/03-84**	2CKA001710A3808	10

[1] Surface painted.

Cover plate for Busch-powerDock

For Busch-powerDock charging cradle.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
ivory white	**6477-82**	2CKA006400A0057	10
studio white	**6477-84**	2CKA006400A0059	10/100

[1] Surface painted.

solo®
Room thermostats

Room thermostat, flush-mounted [1] [2] [3]

END OF LIFE

Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0512	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Slide switch

END OF LIFE

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 U-500	2CKA001032A0514	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Sliding switch, 24 V

END OF LIFE

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~
Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 U	2CKA001032A0485	1
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] 1gang 2way

END OF LIFE

With fixing claws.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 U-101-500	2CKA001032A0513	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

solo®
Room thermostats

Room thermostat, flush-mounted [1] [2] [3]
Actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached. With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 UTA	2CKA001032A0487	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Sliding switch, actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration. Switch contact opens when the set temperature is reached. With built-in slide switch and control lamp for nightly reduction of 4 K.
With fixing claws. Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UTA	2CKA001032A0488	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Sliding switch, actual value indication, 24 V

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached. With built-in slide switch and control lamp for nightly reduction of 4 K. With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~. Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 UTA	2CKA001032A0489	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Change-over contact, actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
With fixing claws.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 UTA	2CKA001032A0490	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Change-over contact, setpoint indication, timer

END OF LIFE

With change-over contact.
Easy adjustment using menu and text-based display.
4 switching times per day can be user-defined for each day of the week.
With fixing claws.
Automatic summer/wintertime switch-over
Power reserve > 10 hours.
To fit cover plate 6435-xxx.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 U-101	2CKA001032A0508	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] Remote sensor

END OF LIFE

With remote sensor and thermal feedback
For underfloor heating. With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached. With fixing claws. Remote sensor cable length: 4 m.
Sensor =NTC, 10 kilo-ohm at 25 degrees C.
Adjusting range: +10 to +50° C. Connecting cable: 1mm² to 2.5 mm². Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~.
Rated current: 16 A, cos ϕ 1. Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UF	2CKA001032A0497	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

solo®
Room thermostats

Room thermostat, flush-mounted [1] [2]) Change-over contact, setpoint indication, timer, remote sensor

END OF LIFE

With change-over contact. Easy adjustment using menu and text-based display. 4 switching times per day can be user-defined for each day of the week. With fixing claws. Automatic summer/wintertime switch-over. Remote sensor cable length: 4 m. Sensor =NTC, 10 kilo-ohm at 25 degrees C. Power reserve > 10 hours
To fit cover plate 6435-xxx. Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~
Rated current: 16 A. Temperature range (Device): 10 °C to 50 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 UF-101	2CKA001032A0509	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.

Room Thermostat

NEW

END OF LIFE

Electronic room thermostat, open contact, fm
Normally open contact, non-isolated
Switch contact opens when the set temperature is reached. Without fixing claws.
Separate terminal to activate eco mode to reduce the room temperature by 3K. See respective cover plates 1794 R-xx. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Power dissipation: ≤ 0,15 W
Rated current: 10 A. Temperature range (device): 5 °C - 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm. Protection class device: IP 20
Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete. Servo-valves, "de-energised open", are necessary for connection to thermostat. e.g. Article No. 6164/10-102. Switching temperature difference: ± 0.5 K

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0525	1/10
	1097 U-101-500	2CKA001032A0528	1/10
	1099 UHK-101-500	2CKA001032A0531	1/10

Cover Plate Thermostat Turn button - 63x63

NEW

C-plate for room thermostats 1094 U-101, 1097 U-101, 1099 U-101.

Colour	Type	Order code	Pack/Qty.
ivory white	**1794 R-82**	2CKA001710A4199	10
studio white	**1794 R-84**	2CKA001710A4201	10

Room thermostat, flush-mounted [1] [2]) [3]) Heating/cooling

END OF LIFE

With separate connection (230 V~) for external switchover between heating or cooling. Switch contact opens when the set temperature is reached.
With fixing claws. Nominal current: 10 A heating
Nominal current: 5 A cooling
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 12 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1099 UHK	2CKA001032A0515	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2]) [3]) Heating/cooling, sliding switch

END OF LIFE

With built-in sliding switch for switchover between cooling or heating.
Switch contact opens when the set temperature is reached. With fixing claws.
Nominal current: 10 A heating.
Nominal current: 5 A cooling.
Class of temperature controller 1.
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~.
Temperature range (Device): 5 °C to 30 °C.
Dimensions: (L x W x D): 12 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1099 UHKEA	2CKA001032A0516	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

RTC Room Temperature Controller

NEW

Room Temperature Controller for Room thermostat Bluetooth with Setpoint display, Timer and Remote control Button 230 V

Colour	Type	Order code	Pack/Qty.
	1095 UTA-BT-500	2CKA001032A0534 Insert - Bluetooth	1
	1094 USITA-BT-500	2CKA001032A0536 Insert - Bluetooth	1
	1096 UTA-BT-500	2CKA001032A0538 Insert - Bluetooth	1
	1099 UHKTA-BT-500	2CKA001032A0540 Insert - Bluetooth	1
	62841 U-WL-500	2CKA006800A3115 Insert - free@home	1
	62842 U-WL-500	2CKA006800A3117 Insert - free@home	1
	62843 U-WL-500	2CKA006800A3119 Insert - free@home	1

solo®
Room thermostats

Cover plate for room thermostat

For room thermostats 1094 U/UF, 1097 U/UF.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
ivory white	**1794-82**	2CKA001710A3543	10
studio white	**1794-84**	2CKA001710A3544	10

[1] Surface painted.

Cover plate for room thermostat

With sliding switch for nightly room temperature reduction. To activate nighttime mode and reduction of room temperature by 4K, for thermostats 1095 U, 1096 U and 1095 UF.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
ivory white	**1795-82**	2CKA001710A3568	10
studio white	**1795-84**	2CKA001710A3569	10

[1] Surface painted.

Cover plate for room thermostat

For room thermostats 1094 UTA, 1097 UTA.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
ivory white	**1794 TA-82**	2CKA001710A3696	10
studio white	**1794 TA-84**	2CKA001710A3698	10

[1] Surface painted.

Cover plate for room thermostat

With sliding switch for nightly room temperature reduction.
For room thermostats 1095 UTA, 1096 UTA.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
ivory white	**1795 TA-82**	2CKA001710A3723	10
studio white	**1795 TA-84**	2CKA001710A3725	10

[1] Surface painted.

Cover Plate, Thermostat Various symbols for Thermostat anthracite - Platform 63

NEW

Central plate with print for room temperature controller with display/Bluetooth or free@home wireless
For room temperature controller with display:
1094 USITA-BT - 1095 UTA-BT - 1096 UTA-BT -
1099 UHKTA-BT - 62841 U-WL - 62842 U-WL - 62843 U-W

Colour	Type	Order code	Pack/Qty.
ivory white	**1794 MDRT-82**	2CKA006430A0418	
studio white	**1794 MDRT-84-500**	2CKA006430A0421	

Cover plate

For room thermostats 1098 U-101 and 1098 UF-101.
For short-time timer 6465 U-101. For Busch-CO2 sensor 1091 U-500. For blind compact timer 6422 U.

Colour	Type	Order code	Pack/Qty.
ivory white	**6435-82**	2CKA006430A0304	10
studio white	**6435-84**	2CKA006430A0306	10

[1] Surface painted.

Cover plate for room thermostat

For room temperature controller 1099 UHK.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
ivory white	**1795 HK-82**	2CKA001710A4015	10
studio white	**1795 HK-84**	2CKA001710A4017	10

[1] Surface painted.

Cover plate for room thermostat

For room temperature controller 1099 UHKEA.
With sliding switch for switchover between cooling or heating.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
ivory white	**1795 HKEA-82**	2CKA001710A4047	10
studio white	**1795 HKEA-84**	2CKA001710A4049	10

[1] Surface painted.

solo®
LED light

Info light unit [1] [2]

Size of information field 43 x 43 mm.
Long service life of the lighting element (LEDs).
Homogeneous backlighting of the information field.
Colour temperature 6,500 K (cold white)
Power consumption: < 0.5 W
Rated voltage: 230 V~
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2062 U	2CKA001511A0115	1/10

[1] Use relay inserts when switching through movement sensors or comfort switches.
[2] For switching the LED flush mounted insert use switches without orientation light only.

Cover plate [1] [3]

As cover for flush-mounted info light.
For insert 2062 U.
Size of information field 43 x 43 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1716-82**	2CKA001731A1922	1
studio white	**1716-84**	2CKA001731A1923	1

[1] Included with the cover are 46 different text labels and symbols.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Surface painted.

Cap for indication lamp

For indication lamps.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
clear-transparent	**1565-11**	2CKA001565A0167	10
red	**1565-12**	2CKA001565A0175	10
green	**1565-13**	2CKA001565A0183	10

solo®

Busch-Infoline®

Cover plate [1] [2] 1gang, with labelling field

With operating knob.
For signal/cancel push-button 1520/1 UK.
For monitoring unit 1511 U.
For Busch-Leakage guard insert 1531 U.
With labelling field 61 x 20 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1571 CN-84**	2CKA001582A0346	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] 2gang, with labelling field

With operating knob.
For signal push-button insert 1520/1 UKZ.
With labelling field 61 x 20 mm.
With exchangeable inlays in read and green for the individual designation of the operating knob.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1572 CN-84**	2CKA001582A0348	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] with red and neutral light panel and labelling field

For Alarm Control Unit insert 1515 U-12.
For Busch-Alarm signal insert 1563 U-12.
For indication lamp insert 1564 U-1x.
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1573 CN-84**	2CKA001582A0350	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] 6gang, illuminable, with labelling field

For signal panel insert 1566 U.
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1575 CN-84**	2CKA001582A0353	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] with labelling field

For power supply insert 1518 U.
For relay insert 1539 U.
For signal generator insert 1561 U-....
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1576 CN-84**	2CKA001582A0355	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

solo®
Accessories

Extension of claws [1])

For the installation of flush-mounted SCHUKO® socket outlets and also switches, push-buttons, etc. and deeply installed flush-mounted boxes.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2148	2CKA002148A0120	100

[1]) Not suitable for types 2000/3 US, 2000/6/2 US, 2000/6/6 US-101 and double socket outlets.

Braille symbol

Self-adhesive (transparent) for cover 2506-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	light		
	2144 LI	2CKA001714A0295	10/1000
	bell		
	2144 KI	2CKA001714A0296	10/1000
	key		
	2144 TR	2CKA001714A0297	10/1000

Braille symbol socket outlet

Self-adhesive, transparent for SCHUKO® socket outlets with hinged lid 20 EUK-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2144 ST	2CKA001714A0298	10/1000

DIN A 4 labelling sheet [1]) plastic foil

Suitable for all to be labeled Busch-Jaeger devices.
For laser printer.
The text of the foil is printed via the Busch-Jeager labeling service.
Dimensions: (L x W x D): 297 mm

Colour	Type	Order code	Pack/Qty.
translucent	**1799/02**	2CKA001799A0959	1
transparent	**1799/03**	2CKA001799A0960	1

[1]) 1 piece = 1 sheet.

RC suppressor

For protection against the damage or destruction of electronic devices due to overvoltages.
For wiring network-interconnected inductivities (e.g.. relay, protection, fluorescent lamps, transformers, etc.).
Eliminates functional disturbances on electronic devices, e.g. automatic circuit reclosure (clocking) of a movement detector.
Dimensions: diameter 25 mm, length 35 mm, length of the connecting cable approx. 100 mm.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz

Colour	Type	Order code	Pack/Qty.
	6899	2CKA006899A0231	10

solo®
Cover frames

Cover frame [1]) 1gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 87 mm x 87 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
chrome	**1721-80-500**	2CKA001754A4535	10/100
chrome gloss	**1721-80G-500**	2CKA001754A4538	10/100
studio white	**1721-84-500**	2CKA001754A4536	10/100

[1]) Suitable for installation in trunking systems with 80 mm conduit.

Cover frame 2gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 157 mm x 87 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
chrome	**1722-80-500**	2CKA001754A4537	10/100
chrome gloss	**1722-80G**	2CKA001754A4327	10
studio white	**1722-84-500**	2CKA001754A4539	10/100

Cover frame 3gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 228 mm x 87 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
chrome	**1723-80-500**	2CKA001754A4540	10/100
chrome gloss	**1723-80G**	2CKA001754A4328	10
studio white	**1723-84-500**	2CKA001754A4541	10/100

Cover frame 4gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 299 mm x 87 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
chrome	**1724-80**	2CKA001754A4107	1
chrome gloss	**1724-80G**	2CKA001754A4329	1
studio white	**1724-84**	2CKA001754A4112	1

Cover frame 5gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 370 mm x 87 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
chrome	**1725-80**	2CKA001754A4108	1
chrome gloss	**1725-80G**	2CKA001754A4330	1
studio white	**1725-84**	2CKA001754A4113	1

Notes

Busch-axcent®

Individuality with an accent.

Express yourself. Enjoy freedom with bright colours and high gloss surfaces. Such choice brings joy. Each room can have accessories in a different colour, each room can have a different personality. Straight lines and bold edges perfectly correspond with the modern style of furnishing. Primary colours can be used as a colour-key for quick and efficient organisation of appliances and equipment.

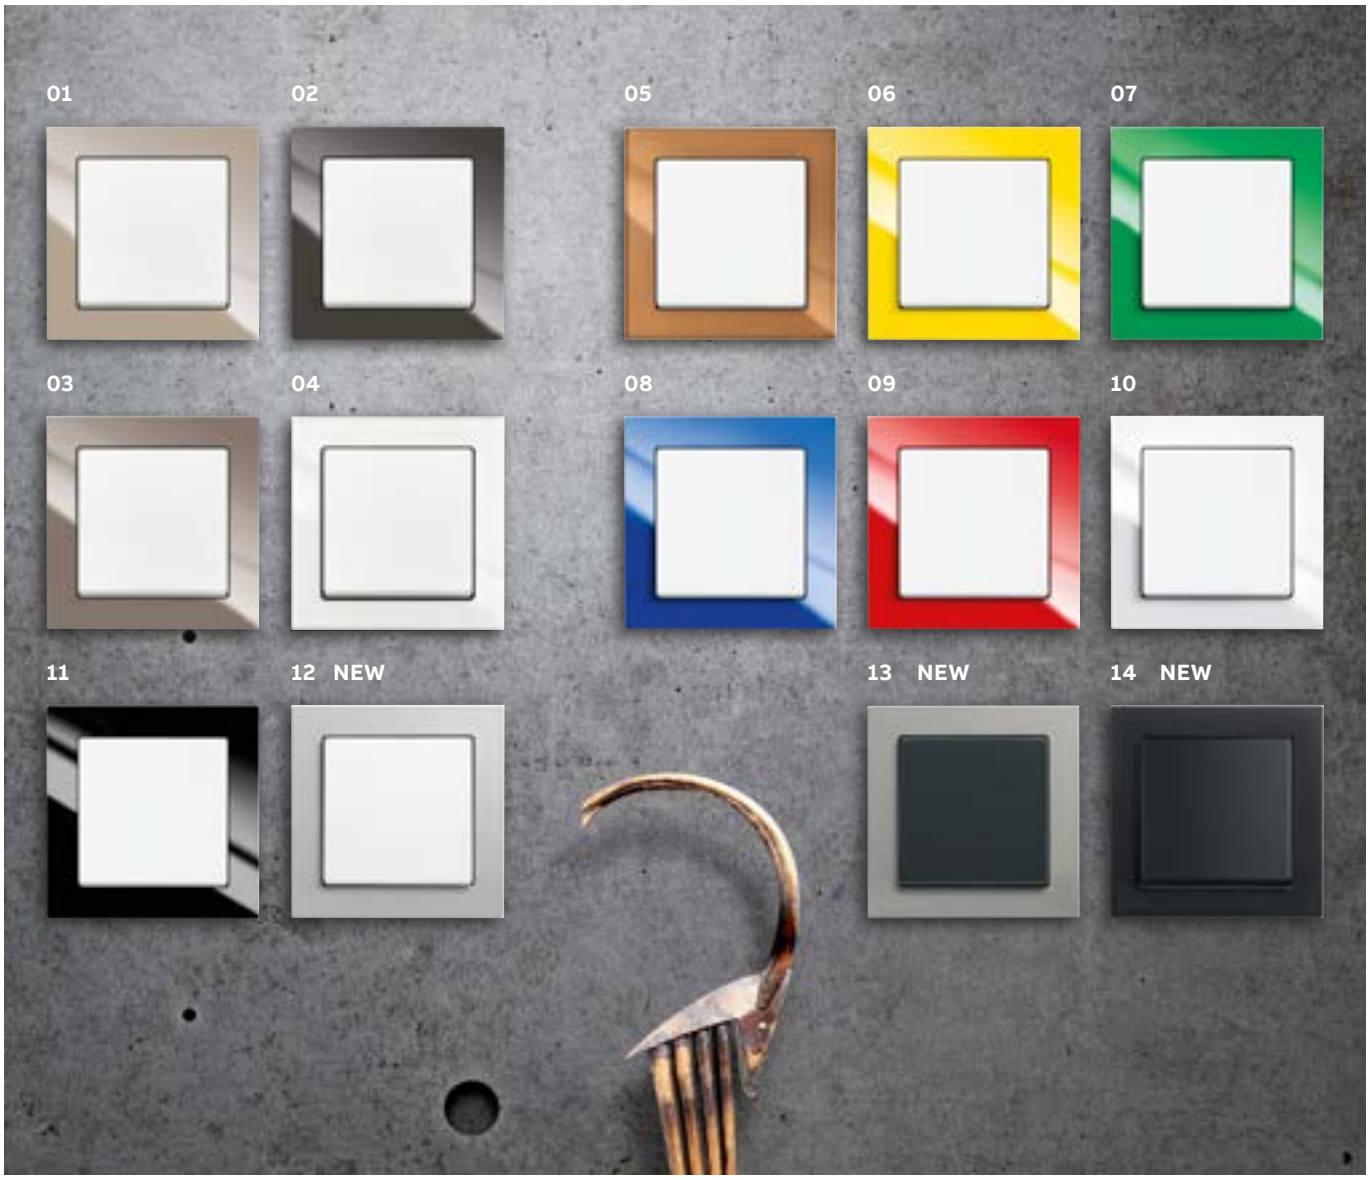

01 studio white / maison-beige
02 studio white / château-black
03 studio white / entrée-grey
04 studio white / white glass
05 studio white / brown glass
06 studio white / yellow
07 studio white / green
08 studio white / blue
09 studio white / red
10 studio white / white
11 studio white / black
12 studio white / titanium
13 anthracite / platinum
14 black matt / black

Materials
Cover: Thermoplastic cover (PC), impact-proof and fracture-resistant, UV-resistant, free of PVC and halogen.

Busch-axcent®

Selected functions

01 

02 

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20

21

01 Rocker switch 1gang
02 Rocker switch 2gang
03 Busch Universal Rotary Dimmer
04 Touch dimmer
05 Busch-Comfort switch
06 Busch-steplight®
07 Busch-Protector® SCHUKO® socket outlet with overvoltage protection
08 SCHUKO® USB socket outlet, USB A&C
09 Socket outlet with earthing pin
10 Switched socket outlet BS standard
11 Blind switch with rotary knob
12 Busch-Blind control switch with semi-cylindrical lock
13 Busch-Blind comfort switch
14 Comfort timer
15 Room thermostat with display
16 Busch-Infoline® alarm insert
17 Busch-Radio DAB+
18 Antenna socket for radio/TV/satellite
19 Universal data connection box
20 Stereo loudspeaker connecting box
21 KNX sensor, for more KNX products see part 12 of the catalogue - Intelligent Building Solutions

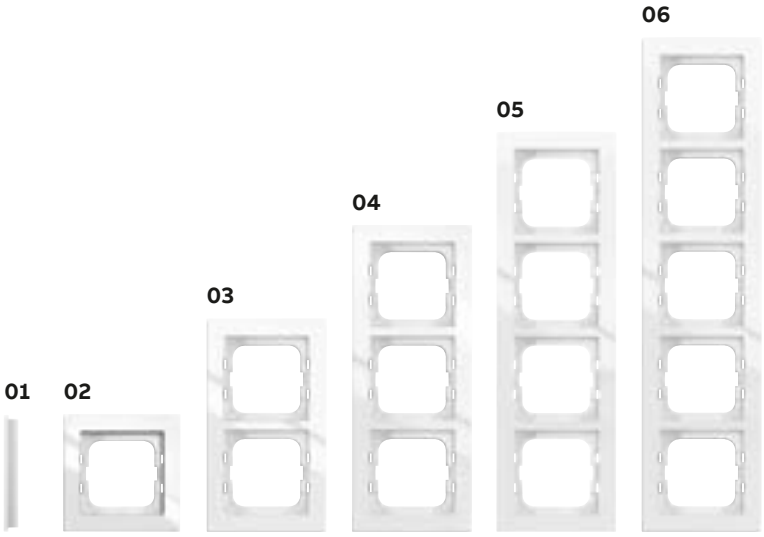

1 to 5gang cover frame for horizontal and vertical installation.
01 Side view, 11 mm x 91 mm
02 91 mm x 91 mm
03 91 mm x 162 mm
04 91 mm x 233 mm
05 91 mm x 304 mm
06 91 mm x 375 mm

For more information about light switch ranges visit ABB global web sites.

Busch-axcent®

Rocker switches / push switches

Rocker Switch Mechanism [1])



Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way		
	2000/6 US-500	2CKA001012A2198	10/100
	2gang 1way		
	2000/5 US-500	2CKA001012A1150	10/100
	DP, 1gang 2way [2])		
	2000/6/2 US	2CKA001012A0954	10
	1gang		
	2000/7 US-500	2CKA001012A2199	10/100
	DP, 1gang 1way		
	2000/2 US-500	2CKA001012A2196	10/100
	SP, 1gang 1way switch		
	2000/1 US-500	2CKA001012A2059	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1])

Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	Switch-off and two-way circuit 16 A		
	2400/6 US-500	2CKA001012A2232	10/100
	2gang switch 16 A		
	2400/5 US-500	2CKA001012A2234	10
	1gang intermediate 16 A		
	2400/7 US-500	2CKA001012A2236	10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]) 2gang 2way

With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/6/6US-101-500	2CKA001011A0928	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]) Changeover/changeover circuit 16 A

With screwless terminals.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6/6US-101-500	2CKA001022A0663	10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]) [2]) DP, 1gang 1way



For switching high loads.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/2 US-101-500	2CKA001012A2193	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Also for switching SCHUKO® socket outlets.

Rocker Switch Mechanism [1]) [2]) 3-pole, 1gang 1way switch

Rated voltage: 400 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/3 US	2CKA001011A0816	10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1])

With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way [2])		
	2000/6 USGL-500	2CKA001012A2194	10/100
	2gang 1way		
	2000/5 USGL	2CKA001012A1135	10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Replacement lamps 8360, 8362, and 8363 and LED inserts.

Busch-axcent®

Rocker switches / push switches

Rocker Switch Mechanism, control [1]
2gang switch with N-clamp 16 A

With LED.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/5 USK-500	2CKA001012A2238	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism, control [1] [2] [3]



With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way with N-terminal		
	2000/6 USK-500	2CKA001022A0659	10/100
	DP, 1gang 1way		
	2000/2 UK	2CKA001022A0656	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Rocker Switch Mechanism, control [1] [2] [3]
Switch-off and two-way circuit with N-clamp 16 A



With neon lamp.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6 USK-500	2CKA001022A0661	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-500	2CKA001413A0574	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With 2 independent signalling contacts.
Rated voltage: 250 V~
Inputs: 1
Outputs: 1
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-201	2CKA001413A0483	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1] [2] [3]
SP, with normally open contact (operating current)

With illumination.
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 USGL-500	2CKA001413A1106	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.
[3] For relay and touch dimmer applications.

Push-switch mechanism [1]

With one input terminal and 2 actuating covers.
Rated voltage: 250 V~
Inputs: 1
Outputs: 2x Normally open contact
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-205-500	2CKA001413A1105	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1] SP, 1gang 2way



Can be wired for normally open contacts (stand-by current) or normally closed contacts (operating current).
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-206-500	2CKA001413A1104	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-axcent®

Rocker switches / push switches

Rocker

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1786-81-500**	2CKA001751A3079	10/100
aluminium silver [1]	**1786-83-500**	2CKA001751A3075	10/100
studio white	**1786-84-500**	2CKA001751A3074	10/100
studio white, matt [1]	**1786-884-500**	2CKA001751A3089	10/100
black matt [1]	**1786-885-500**	2CKA001751A3094	10/100

[1] Surface painted.

Rocker with small red spherical cap

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789-81**	2CKA001751A2928	10
aluminium silver [1]	**1789-83**	2CKA001751A2945	10/100
studio white	**1789-84-500**	2CKA001751A3091	10/100
studio white, matt [1]	**1789-884**	2CKA001751A3033	10
black matt [1]	**1789-885**	2CKA001751A3047	10

[1] Surface painted.

Rocker

For flush-mounted switch 2g 1w, 2g push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785-81**	2CKA001751A2930	10
aluminium silver [1]	**1785-83-500**	2CKA001751A3092	10/100
studio white	**1785-84-500**	2CKA001751A3076	10/100
antique brass [2]	**1785-840-500**	2CKA001751A3117	10
black matt [1]	**1785-885**	2CKA001751A3038	10/100

[1] Surface painted.
[2] Real metal surface refined by hand.

Rocker with small transparent lens

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 N-81**	2CKA001751A3147	10/100
aluminium silver [1]	**1789 N-83**	2CKA001751A3149	10/100
studio white	**1789 N-84-500**	2CKA001751A3151	10/100
studio white, matt [1]	**1789 N-884**	2CKA001751A3153	10/100
black matt [1]	**1789 N-885**	2CKA001751A3154	10/100

[1] Surface painted.

Rocker

As a cover for flush-mounted control 2gang switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785 K-81-500**	2CKA001751A3122	10
aluminium silver [1]	**1785 K-83-500**	2CKA001751A3126	10
studio white	**1785 K-84-500**	2CKA001751A3128	10
studio white, matt [1]	**1785 K-884-500**	2CKA001751A3135	10
black matt [1]	**1785 K-885-500**	2CKA001751A3137	10

[1] Surface painted.

Switch rocker with marking

With >Light< icon.
For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2520 LI-81**	2CKA001751A3186	10/100
aluminium silver [1]	**2520 LI-83**	2CKA001751A3188	10/100
studio white	**2520 LI-84-500**	2CKA001751A3190	10/100
studio white, matt [1]	**2520 LI-884**	2CKA001751A3192	10/100
black matt [1]	**2520 LI-885**	2CKA001751A3193	10/100

[1] Surface painted.

Busch-axcent®

Rocker switches / push switches

Switch rocker with marking

With >Key< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2520 TR-81**	2CKA001751A3196	10/100
aluminium silver [1])	**2520 TR-83**	2CKA001751A3198	10/100
studio white	**2520 TR-84**	2CKA001751A3199	10/100
studio white, matt [1])	**2520 TR-884**	2CKA001751A3201	10/100
black matt [1])	**2520 TR-885**	2CKA001751A3202	10/100

[1]) Surface painted.

Switch rocker with marking

With >Bell< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2520 KI-81**	2CKA001751A3176	10/100
aluminium silver [1])	**2520 KI-83**	2CKA001751A3178	10/100
studio white	**2520 KI-84-500**	2CKA001751A3180	10/100
studio white, matt [1])	**2520 KI-884**	2CKA001751A3182	10/100
black matt [1])	**2520 KI-885**	2CKA001751A3183	10/100

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Light< icon.
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 LI-81**	2CKA001751A2931	10
aluminium silver [1])	**1789 LI-83**	2CKA001751A2951	10
studio white	**1789 LI-84-500**	2CKA001751A3084	10/100
studio white, matt [1])	**1789 LI-884**	2CKA001751A3031	10
black matt [1])	**1789 LI-885**	2CKA001751A3045	10

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Plug< icon.
As cover for flush-mounted switch 1g1w DP and 3pole with neon lens and marking "I O"
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 ST-81**	2CKA001751A3157	10/100
aluminium silver [1])	**1789 ST-83**	2CKA001751A3159	10/100
studio white	**1789 ST-84-500**	2CKA001751A3161	10/100
studio white, matt [1])	**1789 ST-884**	2CKA001751A3163	10/100
black matt [1])	**1789 ST-885**	2CKA001751A3164	10/100

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Key< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 TR-81**	2CKA001751A2933	10
aluminium silver [1])	**1789 TR-83**	2CKA001751A2953	10
studio white	**1789 TR-84**	2CKA001751A2755	10
studio white, matt [1])	**1789 TR-884**	2CKA001751A3032	10
black matt [1])	**1789 TR-885**	2CKA001751A3046	10

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Bell< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 KI-81**	2CKA001751A2932	10
aluminium silver [1])	**1789 KI-83**	2CKA001751A2952	10
studio white	**1789 KI-84**	2CKA001751A2754	10
studio white, matt [1])	**1789 KI-884**	2CKA001751A3030	10
black matt [1])	**1789 KI-885**	2CKA001751A3044	10

[1]) Surface painted.

Busch-axcent®

Rocker switches / push switches

Rocker [1] [2] with labelling field

With pilot lamp for uniform illumination of the labelling field.
For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Size of labelling field: 59.7 x 11.7 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1764 NLI-81**	2CKA001731A1552	10
aluminium silver [3]	**1764 NLI-83**	2CKA001731A1948	10
studio white	**1764 NLI-84**	2CKA001731A1877	10/100
studio white, matt [3]	**1764 NLI-884**	2CKA001731A1985	10
black matt [3]	**1764 NLI-885**	2CKA001731A1982	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Illumination using neon lamp 8353 or incandescent lamp 8344-1 and LED inserts.
[3] Surface painted.

Rocker [1] [2] with labelling field

With >Bell< icon.
With pilot lamp for uniform illumination of the labelling field.
For flush-mounted push switch.
Size of labelling field: 59.7 x 11.7 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1764 NLI/KI-81**	2CKA001731A3998	10/100
aluminium silver [3]	**1764 NLI/KI-83**	2CKA001731A4000	10/100
studio white	**1764 NLI/KI-84-500**	2CKA001731A4002	10/100
studio white, matt [3]	**1764 NLI/KI-884**	2CKA001731A4004	10/100
black matt [3]	**1764 NLI/KI-885**	2CKA001731A4005	10/100

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Illumination using neon lamp 8353 or incandescent lamp 8344-1 and LED inserts.
[3] Surface painted.

Switch rocker with marking with small red spherical cap

With imprint >0< and >I<.
As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1788-81**	2CKA001751A2927	10
aluminium silver [1]	**1788-83**	2CKA001751A2954	10
studio white	**1788-84**	2CKA001751A2750	10/100
studio white, matt [1]	**1788-884**	2CKA001751A3028	10
black matt [1]	**1788-885**	2CKA001751A3042	10

[1] Surface painted.

Switch rocker with marking with small red spherical cap

With >Heating< imprint. As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way. As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 H-81**	2CKA001751A2929	10
aluminium silver [1]	**1789 H-83**	2CKA001751A2955	10
studio white	**1789 H-84**	2CKA001751A2751	10
studio white, matt [1]	**1789 H-884**	2CKA001751A3029	10
black matt [1]	**1789 H-885**	2CKA001751A3043	10

[1] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker el. push-switch.

Colour	Type	Order code	Pack/Qty.
anthracite	**2570-10-81**	2CKA001751A3261	10
aluminium silver [1]	**2570-10-83**	2CKA001751A3259	10
studio white	**2570-10-84**	2CKA001751A3258	10
studio white, matt [1]	**2570-10-884**	2CKA001751A3260	10
black matt [1]	**2570-10-885**	2CKA001751A3262	10

[1] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker 2g el. push-switch.

Colour	Type	Order code	Pack/Qty.
anthracite	**2570-20-81**	2CKA001751A3272	10
aluminium silver [1]	**2570-20-83**	2CKA001751A3270	10
studio white	**2570-20-84**	2CKA001751A3269	10
studio white, matt [1]	**2570-20-884**	2CKA001751A3271	10
black matt [1]	**2570-20-885**	2CKA001751A3273	10

[1] Surface painted.

Busch-axcent®

Rocker switches / push switches

CoverPlates (partly incl. Insert) Hotel application

Rocker 3g el. push-switch.

Colour	Type	Order code	Pack/Qty.
anthracite	**2570-30-81**	2CKA001751A3283	10
aluminium silver [1])	**2570-30-83**	2CKA001751A3281	10
studio white	**2570-30-84**	2CKA001751A3280	10
studio white, matt [1])	**2570-30-884**	2CKA001751A3282	10
black matt [1])	**2570-30-885**	2CKA001751A3284	10

[1]) Surface painted.

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

El. push-switch insert.

Colour	Type	Order code	Pack/Qty.
	2051 U	2CKA001413A1115	10

Flush Mounted Inserts Black

El. push-switch insert 2g.

Colour	Type	Order code	Pack/Qty.
	2052 U	2CKA001413A1116	10

Flush Mounted Inserts Black

El. push-switch ins. 3g.

Colour	Type	Order code	Pack/Qty.
	2053 U	2CKA001413A1117	10

Cover plate

For card switch.
For insert 2025 U.
Suitable for cards sized 54 x 86 mm.
The inner part of the cover plate is made of light-conducting plastic, so that the card slot is illuminated.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1792-81**	2CKA001710A3639	10
aluminium silver [1])	**1792-83**	2CKA001710A3670	10
studio white	**1792-84**	2CKA001710A3641	10
studio white, matt [1])	**1792-884**	2CKA001710A3928	10
black matt [1])	**1792-885**	2CKA001710A3905	10

[1]) Surface painted.

Card switch 10 A [1])
SP, with normally open contact (operating current)



Illuminable.
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2025 U	2CKA001012A1713	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
delivery form:	Adapter plate APBS to be ordered separate.		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

CoverPlates (partly incl. Insert) Hotel application

C-plate, card switch RFID.

Colour	Type	Order code	Pack/Qty.
anthracite	**1792 RFID-81**	2CKA001710A4130	10
aluminium silver [1])	**1792 RFID-83**	2CKA001710A4128	10
studio white	**1792 RFID-84**	2CKA001710A4127	10
studio white, matt [1])	**1792 RFID-884**	2CKA001710A4129	10
black matt [1])	**1792 RFID-885**	2CKA001710A4131	10

[1]) Surface painted.

Busch-axcent®

Rocker switches / push switches

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

Card switch insert RFID.

Colour	Type	Order code	Pack/Qty.
	2025 RFID U	2CKA001012A2242	10

Switch rocker with marking

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
DO NOT DISTURB
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1786/11-81**	2CKA001751A3207	10
aluminium silver [1])	**1786/11-83**	2CKA001751A3001	10
studio white	**1786/11-84**	2CKA001751A2998	10
studio white, matt [1])	**1786/11-884**	2CKA001751A3026	10
black matt [1])	**1786/11-885**	2CKA001751A3040	10

[1]) Surface painted.

Switch rocker with marking

For flush-mounted switch 2g 1w, 2g push switch.
DO NOT DISTURB
MAKE UP ROOM
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785/11-81**	2CKA001751A3205	10
aluminium silver [1])	**1785/11-83**	2CKA001751A2995	10
studio white	**1785/11-84**	2CKA001751A2992	10
studio white, matt [1])	**1785/11-884**	2CKA001751A3023	10
black matt [1])	**1785/11-885**	2CKA001751A3037	10

[1]) Surface painted.

Switch rocker with marking

As cover for flush-mounted rocker control switch insert, DND/MUR.
DO NOT DISTURB
MAKE UP ROOM
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785/11 K-81**	2CKA001751A3212	10
aluminium silver [1])	**1785/11 K-83**	2CKA001751A3210	10
studio white	**1785/11 K-84**	2CKA001751A3209	10
studio white, matt [1])	**1785/11 K-884**	2CKA001751A3211	10
black matt [1])	**1785/11 K-885**	2CKA001751A3213	10

[1]) Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker DND/MUR el. p.-swit.

Colour	Type	Order code	Pack/Qty.
anthracite	**2058-24-84**	2CKA001751A3220	10
aluminium silver [1])	**2058-24-83**	2CKA001751A3221	10
studio white	**2058-24-884**	2CKA001751A3222	10
grey metallic [1])	**2058-24-81**	2CKA001751A3223	10
studio white, matt [1])	**2058-24-885**	2CKA001751A3224	10
black matt [1])	**2058-24-803**	2CKA001751A3226	10

[1]) Surface painted.

Rocker switch insert DND/MUR [1])



With LED.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028 UK	2CKA001012A2240	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-axcent®

Rocker switches / push switches

Rocker switch insert DND/MUR [1])



With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028/12 UK	2CKA001012A2241	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Flush Mounted Inserts

El. push-switch DND/MUR.

Colour	Type	Order code	Pack/Qty.
	2058 UK	2CKA001413A1114	10/100

Bell push-switch DND/MUR 230 V [1])

With LED.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
anthracite	**2029 UC-81**	2CKA001751A3167	1
aluminium silver [2])	**2029 UC-83**	2CKA001751A3169	1
studio white	**2029 UC-84**	2CKA001751A3170	1
studio white, matt [2])	**2029 UC-884**	2CKA001751A3172	1
black matt [2])	**2029 UC-885**	2CKA001751A3173	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Surface painted.

Bell push-switch DND/MUR 24 V [1])

With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
anthracite	**2029/12 UC-81**		1
aluminium silver [2])	**2029/12 UC-83**	2CKA001751A3232	1
studio white	**2029/12 UC-84**	2CKA001751A3231	1
studio white, matt [2])	**2029/12 UC-884**	2CKA001751A3233	1
black matt [2])	**2029/12 UC-885**	2CKA001751A3235	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Bell push-switch DND/MUR.

Colour	Type	Order code	Pack/Qty.
anthracite	**2059 UC-84**	2CKA001751A3240	1
aluminium silver [1])	**2059 UC-83**	2CKA001751A3241	1
studio white	**2059 UC-884**	2CKA001751A3242	1
grey metallic [1])	**2059 UC-81**	2CKA001751A3243	1
studio white, matt [1])	**2059 UC-885**	2CKA001751A3244	1
black matt [1])	**2059 UC-803**	2CKA001751A3246	1

[2]) Surface painted.

Pull switch [1])
SP, with normally open contact (operating current)

With 2-metre pull cord, red handle, and red neon indicator.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	2020/01 US-101	2CKA001413A1112	10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-axcent®

Rocker switches / push switches

Pull switch [1]) SP, break contact

With 2-metre pull cord, red handle, and red neon indicator.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	2020/10 US-101	2CKA001413A1111	10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate [1]) for pull switch 2610/6 UC-xx, 2610/6 UJ-xx

With screw-type terminal
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1796-81**	2CKA001753A0308	10
aluminium silver [2])	**1796-83**	2CKA001753A0310	10
studio white	**1796-84**	2CKA001753A0311	10
studio white, matt [2])	**1796-884**	2CKA001753A0313	10
black matt [2])	**1796-885**	2CKA001753A0314	10

[1]) Exchanging the available cover/cover plate.
[2]) Surface painted.

Rocker open for red pull switch neon indicator

For pull switch 2020/xx US.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1720-81**	2CKA001731A1914	10
aluminium silver [1])	**1720-83**	2CKA001731A1949	10
studio white	**1720-84**	2CKA001731A1916	10
studio white, matt [1])	**1720-884**	2CKA001731A1979	10
black matt [1])	**1720-885**	2CKA001731A1981	10

[1]) Surface painted.

Three-step rotary switch [1]) [2]) SP, with zero position

With zero position.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710 U	2CKA001101A0918	1/10

[1]) Install only in conjunction with wall boxes ø 60 mm.
[2]) Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Three-step rotary switch [1]) [2]) SP, without zero position

Without zero position.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710/1 U	2CKA001101A0919	1/10

[1]) Install only in conjunction with wall boxes ø 60 mm.
[2]) Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Cover plate with rotary control, with marking

As cover for flush mounted three-step rotary switch.
With zero position.
For insert 2710 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2542 DR/01-81**	2CKA001710A3644	10
aluminium silver [1])	**2542 DR/01-83**	2CKA001710A3671	10
studio white	**2542 DR/01-84**	2CKA001710A3646	10
studio white, matt [1])	**2542 DR/01-884**	2CKA001710A3890	10
black matt [1])	**2542 DR/01-885**	2CKA001710A3913	10

[1]) Surface painted.

Busch-axcent®

Rocker switches / push switches

Cover plate with rotary control, with marking

As cover for flush mounted three-step rotary switch.
Without zero position.
For insert 2710/1 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2542 DR/02-81**	2CKA001710A3649	10
aluminium silver [1])	**2542 DR/02-83**	2CKA001710A3672	10
studio white	**2542 DR/02-84**	2CKA001710A3651	10
studio white, matt [1])	**2542 DR/02-884**	2CKA001710A3891	10
black matt [1])	**2542 DR/02-885**	2CKA001710A3914	10

[1]) Surface painted.

Comprising Friends of Hue smart switch insert

Comprising 2gang rocker 6736 FoH-8xx for Friends of Hue smart switch. Consisting of 1gang future® linear cover frames. Comprising fixing plate and intermediate ring. Smarter light switches for wireless remote control of Philips Hue lamps For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<.
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology.

Colour	Type	Order code	Pack/Qty.
studio white	**6716 UJ-84-500**	2CKA006710A0011	1
black matt [1])	**6716 UJ-885-500**	2CKA006710A0018	1

[1]) Surface painted.

Friends of Hue smart switch insert
Wall-mounted transmitter, 2 / 4 channel

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx. Smarter light switches for wireless remote control of Philips Hue lamps. For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology. Combinable with the Busch-Jaeger switch ranges: carat®,carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
	6716 U-500	2CKA006710A0014	1

Bluetooth Low Energy (BLE) smart switch complete set. Wall transmitter, 2/4 channels

Consisting of BLE smart switch insert 6716 UBT, 2gang rocker 6736 FoH-8xx for smart switches, 1gang future® linear cover frame, fixing plate and intermediate ring. Smarter light switch for wireless remote control of BLE radio devices. Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
studio white	**6716/01 UJ-84-500**	2CKA006730A0156	1
black matt [1])	**6716/01 UJ-885-500**	2CKA006730A0157	1

[1]) Surface painted.

Bluetooth Low Energy (BLE) smart switch semi complete set. Wall transmitter, 2/4 channels.

Consisting of BLE smart switch insert 6716 UBT, 2gang rocker 6736 FoH-8xx for smart switches, fixing plate and intermediate ring.
Smarter light switch for wireless remote control of BLE radio devices.
Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, future® linear and Impressivo.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
studio white	**6716/01 UJ-84-510**	2CKA006730A0158	1
black matt [1])	**6716/01 UJ-885-510**	2CKA006730A0159	1

[1]) Surface painted.

Busch-axcent®

Rocker switches / push switches

Bluetooth Low Energy (BLE) smart switch insert. Wall transmitter, 2 / 4 channel

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx.
- Smart switch for wireless remote control of radio components.
- Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Depending on the ecosystem, the wireless range is automatically extended via mains-powered BT mesh devices (repeater function).
- Encrypted transmission with AES-128 (CBC mode) and sequence counter.
- Contains NFC configuration interface according to NFC Forum Type 2 Tag (ISO/IEC 14443 Part 2 + 3).
- Therefore particularly simple commissioning of BLE radio components from Casambi.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
BT smart switch insert (SF)	**6716 UBT**	2CKA006710A0015	1

Smart Switch, WL NEW

Smarter light-/blind switch for wireless control of Busch-flexTronics® wireless and Busch-free@home® devices.
Wall-mounted transmitter, 2/4 channels.
Operation in ABB-flexTronics® wireless with up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required.
Programming with the ABB-free@home® Next App.
Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.
Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.

Colour	Type	Order code	Pack/Qty.
	62721 U-WL-500	2CKA006710A0048	1

1gang rocker for Friends of Hue and Bluetooth (Casambi)

Smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
anthracite	**6735 BT-81**	2CKA006730A0142	1
aluminium silver [1])	**6735 BT-83**	2CKA006730A0144	1
studio white	**6735 BT-84**	2CKA006730A0145	1
studio white, matt [1])	**6735 BT-884**	2CKA006730A0149	1
black matt [1])	**6735 BT-885**	2CKA006730A0150	1

[1]) Surface painted.

Rocker

2gang rocker for Friends of Hue and Bluetooth (Casambi) smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
anthracite	**6736 FoH-81**	2CKA006730A0133	1
aluminium silver [1])	**6736 FoH-83**	2CKA006730A0135	1
studio white	**6736 FoH-84**	2CKA006730A0136	1
studio white, matt [1])	**6736 FoH-884**	2CKA006730A0140	1
black matt [1])	**6736 FoH-885**	2CKA006730A0141	1

[1]) Surface painted.

Rocker
1gang, with "Blind" icon NEW

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Colour	Type	Order code	Pack/Qty.
81 anthracite	**6735-11-81**	2CKA006220A0985	1
83 aluminium silver [1])	**6735-11-83**	2CKA006220A0987	1
84 studio white	**6735-11-84**	2CKA006220A0988	1
884 studio white matt [1])	**6735-11-884**	2CKA006220A0991	1
885 black matt [1])	**6735-11-885**	2CKA006220A0992	1

[1]) Surface painted.

Busch-axcent®
Dimmers

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
Flush-mounted, LED, 2-100 W

With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
Via mode switch adjustable between leading edge control and trailing edge control.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With adjustable minimum brightness.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10%
Rated frequency: 50 Hz/60 Hz
Nominal power: 2 - 100 W/VA (retrofit LED loads).
Nominal power: 10 - 250 W/VA (non-LED loads).
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6523 U-102-500	2CKA006512A0335	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
UP, LED, 2-400 W

Very small installation depth: < 20 mm.
With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without cover plate. Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz Nominal power: 2 - 100 W/VA (leading edge control) Nominal power: 2 - 400 W/VA (trailing edge control)

Colour	Type	Order code	Pack/Qty.
	6523 UR-104-500	2CKA006512A0354	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-axcent®
Dimmers

Busch-rotary dimmer [1] [2] [3] [4] flush mounted, 1-10V

With rotary control.
For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control gears
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 700 W/VA
IEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	2112 U-101-500	2CKA006599A2873	1/10

[1] Non-illuminable.
[2] Use cover plates 2115 J-.../2115-.../6540-... .
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Making-current limiters have to be provided in case of too high making currents.

Busch-rotary dimmer [1]
Flush-mounted, DALI, tunable white

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. Fool proved. For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8). Colour temperature can then be set between 2,700 K - 6,500 K. Brightness power-on level and backround brightness level adjustable, buffered. With integrated LED illumination for orientation. Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Max. current consumption: 15 mA. Not suitable for combining with other DALI sensors or central units of other manufacturers.
For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE article no. 2116/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate. Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116 U	2CKA006599A3025	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1] Flush-mounted, DALI, with internal power supply, tunable white

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8). Colour temperature can then be set between 2,700 K - 6,500 K. With electronic short-circuit protection. With electronic overload protection. Brightness power-on level and backround brightness level adjustable, buffered. With integrated LED illumination for orientation. Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA. Power consumption: < 2,5 W
Number of DALI-units: 37 in case of one active power-potentiometer in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116/11 U	2CKA006599A3026	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-axcent®

Dimmers

Busch-rotary dimmer [1]) Flush-mounted, DALI, with internal power supply, tunable white

Busch-rotary dimmer [1])
flush mounted, DALI
For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
An additional DALI power supply is needed, e.g. by Tridonic, Philips, Helvar or 2117/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117 U-500	2CKA006599A2987	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1])
flush mounted, DALI, with internal power supply

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117/11 U-500	2CKA006599A2988	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-axcent®
Dimmers

Cover plate [1]) with rotary knob, with indication lamp

Elevated knob.
With transparent luminous ring.
For Busch-Dimmer®.
For inserts
2112 U-101/2247 U/2250 U/6513 U-102/6517 U-10x/ 6519 U/6520 U/6523 U(R)(10x) /6591 U-10x and 6592 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6540-81-102**	2CKA006599A2950	10
aluminium silver [2])	**6540-83-102**	2CKA006599A2952	10/100
studio white	**6540-84-102-500**	2CKA006599A3009	10/100
studio white, matt [2])	**6540-884-102**	2CKA006599A2961	10/100
black matt [2])	**6540-885-102**	2CKA006599A2966	10/100

[1]) Replacement neon lamp, Art. No. 3855.
[2]) Surface painted.

LED dimmer insert flex, 1gang [1]) [2]) [3]) [4]) [5]) [6]) FM, LED, 3-240 VA

2-wire connection (neutral conductor not required). Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA). Touch dimmer for switching lighting systems. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi). For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers. For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps. Mix operaton of LEDi with conventional loads possible. With manually adjustable operating mode: trailing / leading edge control. With adjustable minimum brightness. With light-level memory and minimum brightness memory. Low-noise level by MOSFET transistors. With electronic short-circuit protection. With electronic overload protection. Without control cover. For control element flex, 1gang, 64711. For control element flex, 2gang, 64721. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Rated power: 3-240 VA (LEDi). Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 1. Outputs: 1x dimming channel. Suitable for: 230 V LEDi, typical (leading edge control). Rated power: 3 - 100 VA. Suitable for: 230 V LEDi, typical (trailing edge control). Rated power: 3 - 240 W. Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer. Rated power: 10 - 240 VA.Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1]) In the case of conventional transformers, take ~20% transformer loss into account.
[2]) In case of electronic transformers, 5 % transformer losses.
[3]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4]) Recommendation: Please use loads and types of one producer.
[5]) The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6]) A liability on the part of Buscah-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts.
For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx.
For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Busch-axcent®
Dimmers

Control element, 1 gang, flex wireless

Tapping control element, 1gang.
For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads.
Compatible with all free@home flex inserts.
Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point.
Timer with Astro function.
For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Flex control element, 2 gang flex

Tapping control element, 2gang.
For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx.
For saving and calling up 2 scenes via the right rocker.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 2 gang, flex wireless

Tapping control element, 2gang.
For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads.
Compatible with all free@home flex inserts.
Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point.
Timer with Astro function.
For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx.
For saving and calling up 2 scenes via the right rocker.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Rocker 1gang, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRD-1-81	2CKA006220A0149	1
aluminium silver	SRD-1-83	2CKA006220A0150	
studio white	SRD-1-84	2CKA006220A0151	1
studiowh. matt	SRD-1-884	2CKA006220A0605	1
black matt	SRD-1-885	2CKA006220A0622	

Rocker 2gang left, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRD-2-L-81	2CKA006220A0164	1
aluminium silver	SRD-2-L-83	2CKA006220A0165	1
studio white	SRD-2-L-84	2CKA006220A0166	1
studiowh. matt	SRD-2-L-884	2CKA006220A0610	1
black matt	SRD-2-L-885	2CKA006220A0627	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRS-2-R-81	2CKA006220A0173	1
aluminium silver	SRS-2-R-83	2CKA006220A0174	1
studio white	SRS-2-R-84	2CKA006220A0175	1
studiowh. matt	SRS-2-R-884	2CKA006220A0613	1
black matt	SRS-2-R-885	2CKA006220A0630	1

Busch-axcent®

ABB flexTronics inserts

Relay insert flex, 1gang [1)]

3 wire connection (neutral conductor required).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 2300 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Relay insert flex, 2gang [1)]

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-axcent®

ABB flexTronics inserts

e-contact insert flex, 1gang [1] [2]

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1] Use only dimmable high-voltage LEDs.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6]
FM, LED, 3-240 VA

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi).
Rated voltage: 230 V~, +10 % / -10 %.
Rated frequency: 50 Hz.
Inputs: 1.
Outputs: 1x dimming channel.
Suitable for: 230 V LEDi, typical (leading edge control).
Rated power: 3 - 100 VA.
Suitable for: 230 V LEDi, typical (trailing edge control).
Rated power: 3 - 240 W.
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm.
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-axcent®

ABB flexTronics inserts

	Extension insert flex [1])
	3 wire connection (neutral conductor required). For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Control/Signal outputs: 1, electronic output, potential-bound. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-axcent®

ABB flexTronics comfort switch sensor

Comfort switch flex sensor [1) 2)]

Movement detector push-button switch combination.
For switching lighting systems that depend on brightness and movement.
With select lens, prevents detection of smaller animal.
Push switch function possible at all times
With notice LED when manual operation is necessary.
Extension of the detection range by main unit/ extension unit combination.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off.
Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off.
Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off.
With continuous light/continuous Off function.
Adjusting elements on rear side.
Surveillance density: 9 sectors with 28 switching segments.
Switch off delay: 1 to 10 min., adjustable.
Compatible with all ABB flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Display elements: LED for status display.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 5 m, lateral: 3 m, at mounting height: 1.1 m.
Detection angle: 170°.
Brightness limit value: 5 Lux - daytime operation.
Operation mounting height: 0.8 m - 1.2 m.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 63 mm x 63 mm x 28 mm.
Above the wall: 21 mm.

Colour	Type	Order code	Pack/Qty.
anthracite	**64765-81-500**	2CKA006800A2883	1
aluminium silve[3)]	**64765-83-500**	2CKA006800A2887	1
studio white	**64765-84-500**	2CKA006800A2889	1
studio white, matt [3)]	**64765-884-500**	2CKA006800A2893	1
black matt [3)]	**64765-885-500**	2CKA006800A2895	1

[1)] The range specifications refer only to an ambient temperature of 21°C.
[2)] Please order the respective flush-mounted insert separately.
[3)] Surface painted.

Busch-Watchdog 180 flex, basic sensor [1) 2)] with select-lens

Movement detector sensor with with measurement of ambient light.
For automatic switching of devices dependent on motion and brightness.
Compatible with all free@home flex inserts.
Adjusting elements on rear side.
Extension of the detection range by means of master/ slave combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
With detection display in test mode.
Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
Mounting height: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m.
Detection angle: 180°.
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation.
Mounting height: 0.8 m - 1.2 m.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64761-81-500**	2CKA006800A2921	1
aluminium silve[3)]	**64761-83-500**	2CKA006800A2925	1
studio white	**64761-84-500**	2CKA006800A2927	1
studio white, matt[3)]	**64761-884-500**	2CKA006800A2931	1
black matt [3)]	**64761-885-500**	2CKA006800A2933	1

[1)] Please order the respective flush-mounted insert separately.
[2)] The range specifications refer only to an ambient temperature of 21°C.
[3)] Surface painted.

Busch-axcent®

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, comfort sensor [1] [2] with select-lens

Movement detector sensor with with measurement of ambient light.
For automatic switching of devices dependent on motion and brightness.
Push switch function possible at all times.
In combination with dimmer insert flex: dimming function of lighting and selectable light value storage.
With enabling of pre-warning of switch-off for stairwell operation.
Compatible with all free@home flex inserts.
Adjusting elements on rear side.
Extension of the detection range by means of master/slave combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
With continuous light/continuous Off function.
With detection display in test mode.
Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
Mounting height: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m
Detection angle: 180 °
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation
Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64762-81-500**	2CKA006800A2958	1
aluminium silve[3])	**64762-83-500**	2CKA006800A2962	1
studio white	**64762-84-500**	2CKA006800A2964	1
studio white matt [3])	**64762-884-500**	2CKA006800A2968	1
black matt [3])	**64762-885-500**	2CKA006800A2970	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with select-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. ./. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Works with free@home. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**62762-81-WL-500**	2CKA006200A0166	1
aluminium silve[3])	**62762-83-WL-500**	2CKA006200A0170	1
studio white	**62762-84-WL-500**	2CKA006200A0172	1
studio white matt [3])	**62762-884-WL-500**	2CKA006200A0176	1
black matt [3])	**62762-885-WL-500**	2CKA006200A0178	1

[1] [3] Surface painted.

Busch-axcent®

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, comfort sensor [1] [2] with multi-lens

Movement detector sensor with with measurement of ambient light.
For automatic switching of devices dependent on motion and brightness.
Push switch function possible at all times.
For detection down to the floor.
For detection in stairwells.
With 4 detection levels.
In combination with dimmer insert flex: dimming function of lighting and selectable light value storage.
With enabling of pre-warning of switch-off for stairwell operation.
Compatible with all free@home flex inserts.
Adjusting elements on rear side.
Multi-lens: suitable also for mounting heights of 2.20 m.
Extension of the detection range by means of master/slave combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
With continuous light/continuous Off function.
With detection display in test mode.
Surveillance density: 54 sectors with 224 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
Mounting height: 31 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 8 m, lateral: 7 m, Mounting height: 1.1 m
Detection range 2: frontal: 8 m, lateral: 8 m, Mounting height: 2.2 m
Detection angle: 180 °
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation
Mounting height: 0.8 m - 1.2 m alternative: 2.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 63 mm x 63 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64764-81-500**	2CKA006800A2995	1
aluminium silve[3])	**64764-83-500**	2CKA006800A2999	1
studio white	**64764-84-500**	2CKA006800A3001	1
studio white matt [3])	**64764-884-500**	2CKA006800A3005	1
black matt [3])	**64764-885-500**	2CKA006800A3007	1

[1]) Please order the respective flush-mounted insert separately.
[2]) The range specifications refer only to an ambient temperature of 21°C.
[3]) Surface painted.

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with multi-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**62764-81-WL-500**	2CKA006200A0234	1
aluminium silve[3])	**62764-83-WL-500**	2CKA006200A0238	1
studio white	**62764-84-WL-500**	2CKA006200A0240	1
studio white matt [3])	**62764-884-WL-500**	2CKA006200A0244	1
black matt [3])	**62764-885-WL-500**	2CKA006200A0246	1

[1]) [3]) Surface painted.

Busch-axcent®

Blind control / timers

Key Switch Insert [1] [2] [3] breaking circuit, 1-pole

For profile semi-cylindrical lock.
In switched-on and switched-off status the key can be pulled out in the central position, respectively.
Delivered without cylindrical lock.
Rated voltage: 250 V~. Rated current: 10 AX
Suitable for: LEDi / CFLi. Rated power: 100 W
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2733 USL-101	2CKA001101A0914	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Use the cylindrical lock according to the enclosed drawing.
[3] See profile semi-cylindrical lock.

Blind switch insert [1] [2] SP, switch



With interlock.
Rated voltage: 250 V~
Rated current: 10 AX
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/4 US-500	2CKA001012A2197	10/100
	2020/4 US-500	2CKA001413A1103	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] These blind switches/push buttons safely prevent a switch-over of the running direction being carried out too quickly.

Blind switch insert [1] [2]

With rotary knob/switch and push switch.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi. Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2712 U	2CKA001101A0534	10
	SP, N, E		
	2713 U	2CKA001101A0542	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2]

With rotary knob/push button.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2722 U	2CKA001101A0559	10
	SP, N, E		
	2723 U	2CKA001101A0567	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch/push-switch [1] [2] [3] [4]

For profile semi-cylindrical lock/switch and push-switch.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2712 USL-101	2CKA001101A0872	10
	SP, N, E		
	2713 USL-101	2CKA001101A0880	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2] [3] [4]

For profile semi-cylindrical lock/push-button.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
British Standard EN 60669-1, IEC60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2722 USL-101	2CKA001101A0898	10
	SP, N, E		
	2723 USL-101	2CKA001101A0906	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

Busch-axcent®

Blind control / timers

DIN profile-semi cylindrical lock

Acc. to German Standard DIN 18252.
Total length 40 mm
for blind switches and push switches
For inserts 2712/2713/2722/2723/2733 USL-101 and 2712/2733 SLW-5x.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	different lock mechanism, with 3 keys		
	0520 PZ-VS	2CKA000470A0013	1/100
	lock mechanism, with 3 keys		
	0521 PZ-GS	2CKA000470A0021	1/100

Blind compact timer

Suitable for blind and roller blind drives with mechanical or electronic limit switch shut-off.
Without extension unit input.
Running time: 3 min
N-busbar connection is required.
For manual and time-controlled switching of blinds and roller blinds.
Memory function for the simple storage of switching times.
The controlled devices can be manually operated at any time.
Simple setting via display with with segment display and background illumination.
Factory pre-set switching times, individual adaptations are possible.
2 switching times per day can be freely adjusted for each day of the week.
Automatic switchover from summer time to winter time (switch-off function).
Switching times and programs are safely stored in the event of a mains power failure.
Power reserve for time and date > 10 years.
Simple toggling between manual/automatic/vacation modes.
See the associated cover plates 6435-xx.
Programming possible only with control element attached and energized.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 2x Normally open contact
Rated current: 3 A, cos ϕ 0.5
Rated power: 690 VA
Temperature range (Device): 0 °C to 45 °C

Colour	Type	Order code	Pack/Qty.
	6422 U-500	2CKA006410A0410	1/10

Brightness sensor

For insert 6411U/S-101.
With 2 m connecting cable.
Measuring range: 15-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6414-101	2CKA006410A0389	1/10

Sun sensor

For insert 6411U/S-101.
Measuring range: 5-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6482	2CKA006410A0203	1

Busch-axcent®

Blind control / timers

Busch-Short-time timer insert [1]) countdown timer

For time-programmed switching of electrical consumers.
With control cover, without cover plate.
Minimum timer time: 1 second.
Maximum timer time: 9:59:59 hours.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 1x Normally open contact
Rated current: 10 A, cos ϕ 1
Rated power: 2300 VA
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6465 U-101-500	2CKA006410A0393	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
Cover frames:	1gang frame 1721 BS-2xG or Dual Box frame 1722 BSDB-2xG.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker with marking

As cover for flush-mounted blind control switch/push switch.
For inserts 2000/4 and 2020/4 US.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785 JA-81**	2CKA001751A2934	10
aluminium silver [1])	**1785 JA-83**	2CKA001751A2944	10/100
studio white	**1785 JA-84-500**	2CKA001751A3088	10/100
studio white, matt [1])	**1785 JA-884**	2CKA001751A3022	10
black matt [1])	**1785 JA-885**	2CKA001751A3036	10

[1]) Surface painted.

Cover plate with rotary control, with marking

As cover for flush-mounted blind control switch/push switch.
For inserts 2712 U, 2713 U and 2722 U, 2723 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1740-81**	2CKA001710A3623	10
aluminium silver [1])	**1740-83**	2CKA001710A3661	10
studio white	**1740-84**	2CKA001710A3172	10/100
studio white, matt [1])	**1740-884**	2CKA001710A3872	10
black matt [1])	**1740-885**	2CKA001710A3894	10

[1]) Surface painted.

Cover plate [1]) with labelling field

With marking.
For half-cylindrical type switches and blind control switch/push-switch.
For inserts 2733 USL-101 and 2712 USL-101, 2713 USL-101, 2722 USL-101, 2723 USL-101.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1755 SL/PZ-81-101**	2CKA001710A3626	10
aluminium silver [2])	**1755 SL/PZ-83-101**	2CKA001710A3662	10
studio white	**1755 SL/PZ-84-101**	2CKA001710A3175	10
studio white, matt [2])	**1755 SL/PZ-884-101**	2CKA001710A3925	10
black matt [2])	**1755 SL/PZ-885-101**	2CKA001710A3902	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Control element

For Busch-Blind control II insert 6411 U-101, 6411 U/S-101.
For basic blind insert 6418 U.
For Busch-Universal 2gang 1way insert 6402 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6430-81-102**	2CKA006430A0326	1/10
aluminium silver [1])	**6430-83-102**	2CKA006430A0328	1/10
studio white, matt [1])	**6430-884-102**	2CKA006430A0385	1/10
black matt [1])	**6430-885-102**	2CKA006430A0386	1/10

[1]) Surface painted.

Busch-axcent®

Blind control / timers

Cover plate

For room thermostats 1098 U-101 and 1098 UF-101.
For short-time timer 6465 U-101.
For Busch-CO2 sensor 1091 U-500.
For blind compact timer 6422 U.

Colour	Type	Order code	Pack/Qty.
anthracite *)	**6436-81**	2CKA006430A0387	10
aluminium silver 1) *)	**6436-83**	2CKA006430A0357	10
studio white	**6435-84**	2CKA006430A0306	10
studio white, matt 1) *)	**6436-884**	2CKA006430A0363	10
black matt 1)	**6435-885**	2CKA006430A0389	10

1) Surface painted.
*) Phase-out type

Time switch mechanism 16 A 1) 2) DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 15 min
For time-programmed switching of electrical consumers.
Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird.
Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist.
Rated voltage: 230 V~, +10 % / -10 %
Rated current: 16 A, cos ϕ 0.25
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1070 U	2CKA001043A0025	1/10

1) For screw-fixing only
2) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Time switch mechanism 16 A 1) 2) DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 120 min
For time-programmed switching of electrical consumers.
Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird.
Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist.
Rated voltage: 230 V~, +10 % / -10 %
Rated current: 16 A, cos ϕ 0.25
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1071 U	2CKA001043A0124	1

1) For screw-fixing only
2) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate with rotary knob, with marking

For Busch-Timer insert 1070 U.
Running time: 15 min
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1770-81-103**	2CKA001753A0255	10
aluminium silver 1)	**1770-83-103**	2CKA001753A0257	10
studio white	**1770-84-103**	2CKA001753A0258	10
studio white matt 2)	**1770-884-103**	2CKA001753A0260	10
black matt 1)	**1770-885-103**	2CKA001753A0261	10

1) Surface painted.
2) Surface lacquered in aluminium.

Cover plate with rotary knob, with marking

For Busch-Timer insert 1071 U.
Running time: 120 min
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1771-81-103**	2CKA001753A0265	10
aluminium silver 1)	**1771-83-103**	2CKA001753A0267	10
studio white	**1771-84-103**	2CKA001753A0301	10
studio white matt 1)	**1771-884-103**	2CKA001753A0303	10
black matt 1)	**1771-885-103**	2CKA001753A0304	10

1) Surface painted.

Busch-axcent®
Socket outlets

SCHUKO® socket outlet

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUC-81-500**	2CKA002011A6215	10/100
aluminium silver [1])	**20 EUC-83-500**	2CKA002011A6213	10/100
studio white	**20 EUC-84-500**	2CKA002011A6207	10/100
studio white, matt	**20 EUC-884-500**	2CKA002011A6208	10
black matt [1])	**20 EUC-885-500**	2CKA002011A6211	10/100

[1]) Surface painted.

SCHUKO® socket outlet without claw [1]) shuttered

Without claws.
With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCRB-81**	2CKA002013A5437	10/100
aluminium silver [2])	**20 EUCRB-83**	2CKA002013A5439	10/100
studio white	**20 EUCRB-84-500**	2CKA002013A5441	10/100
studio white, matt [2])	**20 EUCRB-884**	2CKA002013A5443	10
black matt [2])	**20 EUCRB-885**	2CKA002013A5444	10/100

[1]) Increased shock protection .
[2]) Surface painted.

SCHUKO® socket outlet [1]) [2]) shuttered

With screw-type terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2300 EUCB-81**	2CKA002013A5448	10
aluminium silver [3])	**2300 EUCB-83**	2CKA002013A5450	10/100
studio white	**2300 EUCB-84**	2CKA002013A5451	10/100
studio white, matt [3])	**2300 EUCB-884**	2CKA002013A5453	10/100
black matt [3])	**2300 EUCB-885**	2CKA002013A5454	10/100

[1]) Increased shock protection .
[2]) With screw-type terminals
[3]) Surface painted.

SCHUKO® socket outlet [1]) [2]) shuttered

With screw-type terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**23 EUCB-81**	2CKA002013A5474	10
ivory white	**23 EUCB-82**	2CKA002013A5475	10
aluminium silver [3])	**23 EUCB-83**	2CKA002013A5476	10
studio white	**23 EUCB-84**	2CKA002013A5477	10/100
studio white, matt [3])	**23 EUCB-884**	2CKA002013A5479	10
black matt [3])	**23 EUCB-885**	2CKA002013A5480	10

[1]) Increased shock protection .
[2]) With screw-type terminal for rigid and flexible wires
[3]) Surface painted.

SCHUKO® socket outlet [1]) shuttered

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCKS-81**	2CKA002013A5265	10
aluminium silver [2])	**20 EUCKS-83-500**	2CKA002013A5375	10/100
studio white	**20 EUCKS-84-500**	2CKA002013A5372	10/100
studio white, matt	**20 EUCKS-884-500**	2CKA002013A5373	10/100
black matt [2])	**20 EUCKS-885**	2CKA002013A5333	10/100

[1]) Increased shock protection .
[2]) Surface painted.

Busch-axcent®
Socket outlets

SCHUKO® USB socket outlet, 2gang [1] [2] [3] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the SCHUKO® socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCB2USBAC-81-500**	2CKA002011A6301	1/10
aluminium silver [4]	**20 EUCB2USBAC-83-500**	2CKA002011A6305	1/10
studio white	**20 EUCB2USBAC-84-500**	2CKA002011A6307	1/10
studio white matt [4]	**20 EUCB2USBAC-884-500**	2CKA002011A6311	1/10
black matt [4]	**20 EUCB2USBAC-885-500**	2CKA002011A6313	1/10

[1] Increased shock protection .
[2] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[3] No data transfer.
[4] Surface painted.

Busch-Socket outlet [1] shuttered

With screwless terminals.
DP (2 P + E)
With eject mechanism.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCBDR-81**	2CKA002013A5415	10
studio white	**20 EUCBDR-84**	2CKA002013A5418	10
aluminium silver [2]	**20 EUCBDR-83**	2CKA002013A5417	10
studio white, matt [2]	**20 EUCBDR-884**	2CKA002013A5420	10
black matt [2]	**20 EUCBDR-885**	2CKA002013A5421	10

[1] Increased shock protection .
[2] Surface painted.

SCHUKO® socket outlet steplight® [1] With night orientation light

With separate connection cables for switch contact.
With LED. Shuttered.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCBLI-81**	2CKA002013A5459	1
aluminium silver [2]	**20 EUCBLI-83**	2CKA002013A5293	1
studio white	**20 EUCBLI-84**	2CKA002013A5294	1
studio white, matt [2]	**20 EUCBLI-884**	2CKA002013A5326	1
black matt [2]	**20 EUCBLI-885**	2CKA002013A5331	1

[1] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2] Surface painted.

SCHUKO® socket outlet [1] with labelling field

DP (2 P + E)
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUN-81**	2CKA002011A3802	10
aluminium silver [2]	**20 EUN-83**	2CKA002011A3810	10
studio white	**20 EUN-84-500**	2CKA002011A6209	10/100
studio white, matt [2]	**20 EUN-884**	2CKA002011A3881	10
black matt [2]	**20 EUN-885**	2CKA002011A3884	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Surface painted.

SCHUKO® socket outlet [1] [2] with label field, increased shock protection

Size of labelling field: 60 x 9 mm.
With screwless terminals. DP (2 P + E)
Shuttered.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCNB-81**	2CKA002013A5427	10
aluminium silver [3]	**20 EUCNB-83**	2CKA002013A5429	10/100
studio white	**20 EUCNB-84-500**	2CKA002013A5431	10/100
studio white, matt [3]	**20 EUCNB-884**	2CKA002013A5433	10/100
black matt [3]	**20 EUCNB-885**	2CKA002013A5434	10/100

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Increased shock protection .
[3] Surface painted.

Busch-axcent®
Socket outlets

SCHUKO® socket outlet [1]) with marking "EDV"

With screwless terminals. DP (2 P + E)
Shuttered.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCKS/DV-81**	2CKA002013A5266	10
aluminium silver [2])	**20 EUCKS/DV-83**	2CKA002013A5273	10/100
studio white	**20 EUCKS/DV-84**	2CKA002013A5268	10
studio white, matt [2])	**20 EUCKS/DV-884**	2CKA002013A5327	10
black matt [2])	**20 EUCKS/DV-885**	2CKA002013A5332	10

[1]) Increased shock protection .
[3]) Surface painted.

Busch-Protector® SCHUKO® socket outlet [1]) with overvoltage protection

DP (2 P + E). With integrated and external signalling contact. ISN = 5 kA
Device protection for technical sensitive equipment such as computer, entertainment electronics and building management systems. Effectively reduces overvoltage peaks occurring between the sub-distribution switch board and SCHUKO® socket outlet. Arrestor test class: classification Type 2. Rated voltage: 250 V~,
Rated current: 16 A. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2310 EUGL/VA-81-11**	2CKA002011A3830	1
aluminium silver [2])	**2310 EUGL/VA-83-11**	2CKA002011A3832	1
studio white	**2310 EUGL/VA-84-11**	2CKA002011A3833	1
red RAL 3020	**2310 EUGL/ VA-12-82-101**	2CKA002011A6257	1/10
studio white, matt [2])	**2310EUGL/VA-884-11**	2CKA002011A3882	1
black matt [2])	**2310EUGL/VA-885-11**	2CKA002011A3885	1

[1]) Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2]) Surface painted.

SCHUKO® socket outlet with LED control light

Shuttered. DP (2 P + E)
With transparent lens.
LED colour green.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCBL-81**	2CKA002013A5457	10
aluminium silver [1])	**20 EUCBL-83**	2CKA002013A5285	10
studio white	**20 EUCBL-84**	2CKA002013A5286	10
studio white, matt [1])	**20 EUCBL-884**	2CKA002013A5336	10
black matt [1])	**20 EUCBL-885**	2CKA002013A5330	10

[1]) Surface painted.

Busch-Object socket outlet [1]) shuttered

With screwless terminals.
DP (2 P + E)
Incl. Cover plate with extract mechanism.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUAB-81**	2CKA002013A5404	10
aluminium silver [2])	**20 EUAB-83**	2CKA002013A5406	10
studio white	**20 EUAB-84**	2CKA002013A5407	10
studio white, matt [2])	**20 EUAB-884**	2CKA002013A5409	10
black matt [2])	**20 EUAB-885**	2CKA002013A5410	10

[1]) Increased shock protection .
[2]) Surface painted.

FI-SCHUKOMAT, SCHUKO® socket outlet (RCD) [1]) [2]) [3]) with earth leakage circuit breaker

Shuttered.
DP cut off (P,N)
Without PE monitoring.
With output terminals for connecting and protecting downsream SCHUKO® socket outlets.
Rated fault current: 30 mA.
With fixing claws.
Rated frequency: 45-60 Hz.
Rated voltage: 230 V~
Rated current: 16 A
Protection class (Device): IP 20
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
anthracite	**3120 EUCB-81**	2CKA003116A0667	1/10
aluminium silver [4])	**3120 EUCB-83**	2CKA003116A0668	1/10
studio white	**3120 EUCB-84**	2CKA003116A0662	1
studio white, matt [4])	**3120 EUCB-884**	2CKA003116A0670	1/10
black matt [4])	**3120 EUCB-885**	2CKA003116A0671	1/10

[1]) Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2]) Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.
[3]) Increased shock protection .
[4]) Surface painted.

Busch-axcent®
Socket outlets

Buschmat® FI - Insert [1]
with earth leakage breaker with connecting conductor

Protection of downstream consumers.
Rated fault current: 30 mA.
DP cut off (P,N)
With fixing claws.
Rated frequency: 45-60 Hz.
Rated voltage: 230 V~
Rated current: 16 A
Protection class (Device): IP 20
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
anthracite	**3151 UC-81**	2CKA003117A0009	1/10
aluminium silver [2]	**3151 UC-83**	2CKA003117A0010	1/10
studio white	**3151 UC-84**	2CKA003117A0006	1/10
studio white, matt [2]	**3151 UC-884**	2CKA003117A0012	1/10
black matt [2]	**3151 UC-885**	2CKA003117A0013	1/10

[1] Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.
[2] Surface painted.

SCHUKO® socket outlet with hinged lid

With screwless terminals.
DP (2 P + E)
Hinged lid notches when opened.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUK-81**	2CKA002018A1486	10
aluminium silver [1]	**20 EUK-83**	2CKA002018A1487	10
studio white	**20 EUK-84-500**	2CKA002018A1509	10/100
antique brass [2]	**20 EUK-840-500**	2CKA002018A1515	10
black matt [1]	**20 EUK-885**	2CKA002018A1495	10

[1] Surface painted.
[2] Real metal surface refined by hand.

SCHUKO® socket outlet [1]
with hinged lid and internal increased shock protection

Shuttered.
With screwless terminals.
DP (2 P + E)
with hinged lid
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKB-81**	2CKA002018A1517	10/100
aluminium silver [2]	**20 EUKB-83**	2CKA002018A1519	10/100
studio white	**20 EUKB-84**	2CKA002018A1520	10/100
studio white, matt [2]	**20 EUKB-884**	2CKA002018A1522	10/100
black matt [2]	**20 EUKB-885**	2CKA002018A1523	10/100
anthracite [3]	**20 EUKBR-81**	2CKA002018A1526	10/100
aluminium silver [2] [3]	**20 EUKBR-83**	2CKA002018A1528	10/100
studio white [3]	**20 EUKBR-84**	2CKA002018A1529	10/100
studio white, matt [2] [3]	**20 EUKBR-884**	2CKA002018A1530	10/100
black matt [2] [3]	**20 EUKBR-885**	2CKA002018A1531	10/100

[1] Increased shock protection.
[2] Surface painted.
[3] Without claw.

SCHUKO® socket outlet [1] [2] [3]
with hinged lid and labelling field

Shuttered.
With screwless terminals.
DP (2 P + E)
with hinged lid
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNB-81**	2CKA002018A1537	10/100
aluminium silver [4]	**20 EUKNB-83**	2CKA002018A1539	10/100
studio white	**20 EUKNB-84**	2CKA002018A1540	10/100
studio white, matt [4]	**20 EUKNB-884**	2CKA002018A1541	10/100
black matt [4]	**20 EUKNB-885**	2CKA002018A1542	10/100

[1] Increased shock protection.
[2] The labels are clamped under the labelling field.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4] Surface painted.

Busch-axcent®
Socket outlets

SCHUKO® socket outlet [1]) with hinged lid and lock

Shuttered. With screwless terminals.
DP (2 P + E). With different lock mechanism.
Delivery includes 2 keys.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNBSL-81**	2CKA002018A1557	10
aluminium silver [2])	**20 EUKNBSL-83**	2CKA002018A1561	10
studio white	**20 EUKNBSL-84**	2CKA002018A1563	10
studio white, matt [2])	**20 EUKNBSL-884**	2CKA002018A1565	10
black matt [2])	**20 EUKNBSL-885**	2CKA002018A1567	10

[1]) Increased shock protection.
[2]) Surface painted.

SCHUKO® socket outlet [1]) with hinged lid and lock

Shuttered. With screwless terminals. DP (2 P + E)
With evenly engaging lock.
Delivery includes 2 keys.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNBSL-81-101**	2CKA002018A1558	10
aluminium silver [2])	**20 EUKNBSL-83-101**	2CKA002018A1562	10
studio white	**20 EUKNBSL-84-101**	2CKA002018A1564	10
studio white, matt [2])	**20 EUKNBSL-884-101**	2CKA002018A1566	10
black matt [2])	**20 EUKNBSL-885-101**	2CKA002018A1568	10

[1]) Increased shock protection.
[2]) Surface painted.

SCHUKO® socket outlet [1]) [2]) [3]) with hinged lid, labelling field and LED control light

Shuttered. With screwless terminals.
DP (2 P + E) with hinged lid
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNBL-81**	2CKA002018A1548	10/100
aluminium silver [4])	**20 EUKNBL-83**	2CKA002018A1550	10/100
studio white	**20 EUKNBL-84**	2CKA002018A1551	10/100
studio white, matt [4])	**20 EUKNBL-884**	2CKA002018A1552	10/100
black matt [4])	**20 EUKNBL-885**	2CKA002018A1553	10/100

[1]) Increased shock protection.
[2]) The labels are clamped under the labelling field.
[3]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4]) Surface painted.

Double SCHUKO® socket outlets [1]) [2]) [3]) [4]) [*])

Complete cover.
With screwless terminals.
DP (2 P + E)
Suitable for 1gang flush-mounted boxes.
Without claws.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**20-02 EUJR-84-503**	2CKA002014A1370	10

[1]) Separat installation only possible.
[2]) With 2 x 2 terminals per pole.
[3]) Increased shock protection.
[4]) Shutter for increased shock protection integrated at the socket.
[*]) Phase-out type

Socket outlet [1]) shuttered

Without claws.
With screw-type terminals.
DP
Suitable for 1gang flush-mounted boxes.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
anthracite	**2300 UCRKS-81-503**	2CKA002113A5339	10
studio white	**2300 UCRKS-84-503**	2CKA002113A0511	10
studio white, matt [2])	**2300 UCRKS-884-503**	2CKA002113A5337	10
black matt [2])	**2300 UCRKS-885-503**	2CKA002113A5340	10

[1]) Increased shock protection.
[2]) Surface painted.

13 A Switched socket outlet

SP switched
1gang
Only for mounting in VDE flush-mounted wallboxes CFB 122 and CFBM 122.
Rated voltage: 250 V~
Rated current: 13 ABS 1363: part2

Colour	Type	Order code	Pack/Qty.
anthracite	**2190 EUC-81**	2CKA002190A0216	10/100
aluminium silver [1])	**2190 EUC-83**	2CKA002190A0214	10
studio white	**2190 EUC-84**	2CKA002190A0215	10/100
studio white, matt [1])	**2190 EUC-884**	2CKA002190A0218	10
black matt [1])	**2190 EUC-885**	2CKA002190A0219	10

[1]) Surface painted.

Busch-axcent®
Socket outlets

USB socket outlet earthing pin, 2gang [1] [2] [3] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the pin earth socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**20 MUCB2USBAC-81-500**	2CKA002017B1913	1
aluminium silver [3]	**20 MUCB2USBAC-83-500**	2CKA002017A1915	1/10
studio white	**20 MUCB2USBAC-84-500**	2CKA002017A1916	1/10
studio white matt [3]	**20 MUCB2USBAC-884-500**	2CKA002017A1918	1/10
black matt [3]	**20 MUCB2USBAC-885-500**	2CKA002017A1919	1/10

[1] Socket outlet with integrated child protection. Replaces the usual term"...with child protection".
[2] No data transfer.
[3] Surface painted.

Shaver socket outlet

For installation into FM 2gang wall box 3030 and 3031.
Rated voltage: 240 V, +10 % / -10 %
Output voltage: 115 V, +10 % / -10 %
Secondary: 240 V, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 20 VA

Colour	Type	Order code	Pack/Qty.
anthracite	**2332 UJBS-81**	2CKA002130A0297	1
aluminium silver [1]	**2332 UJBS-83**	2CKA002130A0291	1
studio white	**2332 UJBS-84**	2CKA002130A0292	1
studio white, matt [1]	**2332 UJBS-884**	2CKA002130A0294	1
black matt [1]	**2332 UJBS-885**	2CKA002130A0295	1

[1] Surface painted.

Flush-mounting wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 135 mm x 75 mm x 47 mm

Colour	Type	Order code	Pack/Qty.
	3030	2CKA001741A0067	4

Flush-mounting cavity wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 142 mm x 75 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
	3031	2CKA001741A0068	4

2gang European/American socket outlet, 10A

2gang
With screw-type terminals.
SP switched
Without claws.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2192-02 UC-81-500**		
	delivery on request		
studio white	**2192-02 UC-84-500**		

Socket outlet [1] with earth pin

With screwless terminals.
Suitable for the countries: Belgium, Poland, Czech Republic.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	20 M-500	2CKA002017A0854	10/100

[1] Insert can be used for all covers 2399 UCKS-xx.

Busch-axcent®
Socket outlets

Socket outlet cover frame shuttered

For socket outlet insert 20 M-500.
Rated voltage: 250 V~

Colour	Type	Order code	Pack/Qty.
anthracite	**2399 UCKS-81**	2CKA002099A0216	10
aluminium silver [1])	**2399 UCKS-83**	2CKA002099A0241	10/100
studio white	**2399 UCKS-84**	2CKA002099A0214	10
studio white, matt [1])	**2399 UCKS-884**	2CKA002099A0255	10
black matt [1])	**2399 UCKS-885**	2CKA002099A0256	10/100

[1]) Surface painted.

Chinese socket outlet, 10 A

1gang
With screw-type terminals.
Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 10 A
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2193 EUC/10-81-500**		
	delivery on request		
studio white	**2193 EUC/10-84-500**		

Chinese socket outlet, 16 A

1gang
With screw-type terminals.
Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2193 EUC/16-81-500**		
	delivery on request		
studio white	**2193 EUC/16-84-500**		

Chinese and Euro American socket outlet, 10 A

1gang
With screw-type terminals.
Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2195 EUC/10-81-500**		
	delivery on request		
studio white	**2195 EUC/10-84-500**		

International socket outlet 13A [1])

1gang
With screw-type terminals.
Without claws.
Rated voltage: 250 V~
Rated current: 13 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2197 EUC-81-500**		
	delivery on request		
studio white	**2197 EUC-84-500**		

[1]) Usage may be restricted in certain countries.

Euro American socket outlet with earth, 16 A

1gang
With screw-type terminals.
Without claws.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2196 EUC-81-500**		
	delivery on request		
studio white	**2196 EUC-84-500**		

Busch-axcent®

Data communication

Universal data connection unit, cat. 3 [1]) 1gang

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0213-500	2CKA000230A1549	10/100

[1]) Suitable for cover plate 1803-xxx.

Universal data connection box with down-leading outlet [1]) 2gang internally parallel connected

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0214	2CKA000230A0235	10/100
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Universal data connection box with down-leading outlet [1]) 2 x outlets, 8/8-pole

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0215	2CKA000230A0243	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 1gang

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems. Without claws.
Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/11-101	2CKA000230A0409	1/10

[1]) Suitable for cover plate 1803-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 2 x outlets, 8/8-pole

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For trunk systems, flush-mounted wall boxes and underfloor systems. For wires of AWG 24-22.
Without claws. Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/12-101	2CKA000230A0411	1/10

[1]) Suitable for cover plate 1803-02-xxx.

Busch-axcent®

Data communication

Universal data connection box 8(6)/ telephone unit 6F+N - connection box [1]) 2 x 6-pole



With straight outlet, with screw contacts.
Universal data-connection boxes: RJ 11/12, ISDN capable Cat. 3 in acc. with IEC 603-7/German Standard DIN EN 60603-7,
Telecommunication outlet (telephone unit): for 1 telephone, 1 auxiliary device or 1 data transmission unit,
With claw. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**UAE 8(6)TAE 6 F+N**	2CKA000230A0381	10/100

[1]) Suitable for cover plate 2539-xxx, 1766-xxx and 1746-2xx-FN.

Satellite co-axial outlets 2 connectors/dead-end feeder

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0230-101	2CKA000230A0250	10/100

Antenna socket insert Radio/TV 2 connectors/loop through type

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0231-101	2CKA000230A0268	10/100

Satellite co-axial outlets Radio/TV/SAT 3gang dead-end feeder

Broadband technology 47-2.150 MHz.
SAT connection designed as screwable F-male plug. with remote feed via F-bush
For DVB-T and broadband-cable-systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0232-101-500	2CKA000230A0463	10/100

Terminating resistor 75 Ohm

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0239	2CKA000230A0201	10/100

Mounting plate [1]) [2]) with green insert



For 2 modular jack inserts.
For systems: CommScope (AVAYA / AT&T / Lucent Technologies), GigaSPEED, PowerSUM, 360 GS 10E bis MGS 600-BK, M1 BH-xx, MPS 100E-xx.
With R&M adapter R310694 suitable for R&M connection modules R305111, R305112, R305113 and R305114.
Pitch dimensions: (WxH) approx. 16.9 x 17.9 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1810-500	2CKA001753A9974	10/100

[1]) Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2]) For further information, please refer on the Internet.

Mounting plate [1]) [2]) with red insert



For 2 modular jack inserts.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
For systems: AMP / tyco Electronics, BTR, EFB, Krone, Panduit, Quante, Radiall, Setec, Dr.-Ing. Sieger, Telena, Thomas & Betts
For Telegärtner AMJ/UMJ connection modules/ couplings.
For 2 fiber optic modules of the following types: 3M-Volition, Krone, mvk.
Pitch dimensions: (WxH) approx. 14.8 x 19.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1812-500	2CKA001753A9972	10/100

[1]) Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2]) For further information, please refer on the Internet.

Mounting plate [1]) [2]) with black insert

For MTRJ or 2 modular jack inserts.
For systems: Ackermann, AMP / tyco Electronics (Slim Line (SL) -SM 2gang/switches: 110Connect Jacks, Toolless Jacks / Standard 110Connect Jacks), Brand-Rex, CombiNet, EFB Electronic, Telena.
For 2 fiber optic modules of the following types: AMP / tyco Electronics MTRJ.
Pitch dimensions: (WxH) approx. 14.8 x 20.4 mm.
Without claws. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1814-500	2CKA001753A9973	10/100

[1]) Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2]) For further information, please refer on the Internet.

Busch-axcent®

Data communication

Mounting plate [1] [2] with orange base

For 2 modular jack inserts.
For system: LexCom 150 and LexCom 250.
Pitch dimensions: (WxH) approx. 15.4 x 15.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1819	2CKA001753A8056	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with grey base

For 2 modular jack inserts.
For system: Panduit MiniCom (Cu. z.B. TX6 10 Gig Shielded Jack modules and fiber optic modules.
Pitch dimensions: (WxH) approx. 15.9 x 18.7 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1820	2CKA001753A8057	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Flush-mounted assembly adapter

For the accommodation of one or two universal modules 0219.
For flush-mounted installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/12	2CKA000230A0395	1/10

Channel assembly adapter

For the accommodation of one or two universal modules 0219. For channel and under-floor installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/13	2CKA000230A0396	1/10

Universal module, RJ 45, cat. 6a iso, shielded [1] 1gang

For installation in installation adapter 0219/12 or 0219/13. Also suited for mounting into cover plate 2561-xxx, 2564-02-xxx and bases 1812, 1866 EB, and 1867 EB.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Cat. 6A according to ISO/IEC 11801: 2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Bend-radius optimised cable feed (30°).
Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
For 8-pole plug RJ 45 only.
Housing made from diecast zinc.
With integrated dust-protection cap (can be removed if necessary). With insulation displacement connection
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219-101	2CKA000230A0413	1/10

[1] With assembly adapters appropriate for telephone unit cover plates 2539-21x and 1766-xxx.

Modular-Jack insert 6-pole Cat. 3 (AMP-No. 216000-2)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0210	2CKA000225A0078	10

Busch-axcent®

Data communication

Modular-Jack insert 8-pole Cat. 3 (AMP-No. 216005-4)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0211	2CKA000225A0086	10

Built-in jack

For potential balancing jack cover plate and installation in cover plates.
For devices of 19 mm diameter.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0471-0-0037	2CKA000471A0037	10

Potential balancing plug

Suitable for plug 2095 UC-212 and built-in jack 0471-0-0037 acc. to German Standard DIN 42801.
For potential balancing jack cover plate (connection up to 6 mm² crimped or soldered)
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0299-0-0032	2CKA000299A0032	10

Blank plate with metal mounting plate

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1742-81**	2CKA001710A3612	10
aluminium silver [1])	**1742-83**	2CKA001710A3664	10
studio white	**1742-84-500**	2CKA001710A3991	10/100
studio white, matt [1])	**1742-884**	2CKA001710A3873	10/100
black matt [1])	**1742-885**	2CKA001710A3895	10

[1]) Surface painted.

Cover plate [1])

As cover for flex outlet, for cords up to 10.3 mm diameter.
With strain relief (without terminal block).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1749-81**	2CKA001710A3614	10
aluminium silver [2])	**1749-83**	2CKA001710A3665	10
studio white	**1749-84**	2CKA001710A3163	10/100
studio white, matt [2])	**1749-884**	2CKA001710A3878	10
black matt [2])	**1749-885**	2CKA001710A3900	10

[1]) Cover plate can also be used individually as cover for telephone connector boxes (VDo).
[2]) Surface painted.

Cover plate [1])

As cover for universal data connection boxes.
Art.-No. 0213 (Cat 3/ISDN), 0216-101, 0218/11-101 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
For WLAN access points 8186/31 and 8186/41.
Brand-Rex (WAEGV 8 EKR/EK).
BTR (universal data connecting unit design and IAE design).
Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.
With labelling field.
Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1803-81**	2CKA001710A3616	10
aluminium silver [2])	**1803-83**	2CKA001710A3674	10
studio white	**1803-84-500**	2CKA001710A1550	10/100
studio white, matt [2])	**1803-884**	2CKA001710A3889	10
black matt [2])	**1803-885**	2CKA001710A3912	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Busch-axcent®

Data communication

Cover plate [1]) 2gang

As cover for universal data connection boxes.
Art. No. 0214, 0215 (Cat 3), 0220/12-507, 0221/12-507, 0218, 0217 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck. Brand-Rex (WAEGV 8/8 EKR/EK). AMP (NETCONNECT 5E).
BTR (E-DAT C6, E-DAT design, Universal data connecting unit design and IAE design). cti (cti-wire 2.8 Cat.6).
Telegärtner (AMJ 45, UMJ 45). With down-leading outlet.
With labelling field. Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1803-02-81**	2CKA001710A3615	10
aluminium silver [2])	**1803-02-83**	2CKA001710A3610	10/100
studio white	**1803-02-84-500**	2CKA001710A1551	10/100
studio white, matt [2])	**1803-02-884**	2CKA001710A3888	10
black matt [2])	**1803-02-885**	2CKA001710A3911	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Cover plate

For telephone connection unit. For USB, VGA, HDMI inserts and communication adapter. USB power adapter insert 6475 U-500. For loudspeaker connection box. Suitable for part number 0248/0x-101. For data modules. Suitable for Art. No. 0219/12 and 0219/13. For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE). Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1766-81**	2CKA001710A3613	10
aluminium silver [1])	**1766-83**	2CKA001710A3659	10/100
studio white	**1766-84-500**	2CKA001710A3992	10/100
studio white, matt [1])	**1766-884**	2CKA001710A3926	10
black matt [1])	**1766-885**	2CKA001710A3903	10

[1]) Surface painted.

Cover plate

As cover for telephone connector boxes (VDo).
Can be knocked out for single or double connection.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1745-81**	2CKA001710A3624	10
studio white	**1745-84**	2CKA001710A3173	10
black matt [1])	**1745-885**	2CKA001710A3896	10
aluminium silver [1])	**1745-83**	2CKA001710A3675	10
studio white, matt [1])	**1745-884**	2CKA001710A3874	10

[1]) Surface painted.

Cover plate [1]) socket outlet

Telephone socket (TDO)

Colour	Type	Order code	Pack/Qty.
anthracite	**1762-81-506**	2CKA001710A4103	10/100
aluminium silver [2])	**1762-83-506**	2CKA001710A4105	10/100
studio white	**1762-84-506**	2CKA001710A4106	10/100
studio white matt [2])	**1762-884-506**	2CKA001710A4108	10/100
black matt [2])	**1762-885-506**	2CKA001710A4109	10/100

[1]) Suitable insert: TDO 3x 10 OUP (for 1 telephone and 2 auxiliary devices).
[2]) Surface painted.

Cover plate [1]) [2]) as cover for standard Radio/TV/SAT socket outlets

With 2 connectors
Acc. to German Standard DIN 45330.
Radio/TV/SAT.
With M3 fixing screw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1743-81**	2CKA001724A4252	10
aluminium silver [3])	**1743-83**	2CKA001724A4262	10
studio white	**1743-84-500**	2CKA001724A4332	10/100
studio white, matt [3])	**1743-884**	2CKA001724A4293	10/100
black matt [3])	**1743-885**	2CKA001724A4298	10/100

[1]) Third opening can be knocked out.
[2]) See inserts for satellite coaxial socket outlets.
[3]) Surface painted.

Cover plate

As cover for 4gang Satellite co-axial socket outlet EVU 02 F, GEVU 15 S from Hirschmann.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1743-04-81**	2CKA001724A4374	10
aluminium silver [1])	**1743-04-83**	2CKA001724A4376	10
studio white	**1743-04-84**	2CKA001724A4377	10
studio white, matt [1])	**1743-04-884**	2CKA001724A4379	10
black matt [1])	**1743-04-885**	2CKA001724A4380	10

[1]) Surface painted.

Busch-axcent®

Data communication

Cover plate

As cover for 4gang Satellite co-axial socket outlet SAT400/EAS/DC, EAS 405, 413 DAS from Ankaro.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1743/10-04-81**	2CKA001724A4365	10
aluminium silver [1])	**1743/10-04-83**	2CKA001724A4367	10
studio white	**1743/10-04-84**	2CKA001724A4368	10/100
studio white, matt [1])	**1743/10-04-884**	2CKA001724A4370	10
black matt [1])	**1743/10-04-885**	2CKA001724A4371	10

[1]) Surface painted.

Cover plate [1]) with labelling field

For modular jack with slide entrance.
To fit only Art. No. 1810, 1812, 1814, 1816, 1818, 1819 and 1820.
Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1800-81**	2CKA001710A3627	10
aluminium silver [2])	**1800-83**	2CKA001710A3676	10
studio white	**1800-84-500**	2CKA001710A3990	10/100
studio white, matt [2])	**1800-884**	2CKA001710A3887	10
black matt [2])	**1800-885**	2CKA001710A3910	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Cover plate

For 1 modular jack.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2561-81**	2CKA001753A0400	10
aluminium silver [1])	**2561-83**	2CKA001753A0402	10
studio white	**2561-84**	2CKA001753A0403	10
studio white, matt [1])	**2561-884**	2CKA001753A0405	10
black matt [1])	**2561-885**	2CKA001753A0406	10

[1]) Surface painted.

Cover plate

For 2 modular jack inserts.
Suitable for Art. No. 0210 and 0211.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2561-02-81**	2CKA001753A0317	10
aluminium silver [1])	**2561-02-83**	2CKA001753A0393	10
studio white	**2561-02-84**	2CKA001753A0394	10
black matt [1])	**2561-02-885**	2CKA001753A0397	10
studio white, matt [1])	**2561-02-884**	2CKA001753A0396	10

[1]) Surface painted.

Cover plate

For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1746/10-81**	2CKA001710A3628	10
aluminium silver [1])	**1746/10-83**	2CKA001710A3677	10
studio white	**1746/10-84-500**	2CKA001710A3993	10/100
studio white, matt [1])	**1746/10-884**	2CKA001710A3875	10
black matt [1])	**1746/10-885**	2CKA001710A3897	10

[1]) Surface painted.

Intermediate ring Reflex SI/SI Linear

For fitting cover plates from the Busch-Duro 2000® SI and Reflex SI range.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
studio white	**1747 SI-84**	2CKA001710A3863	10
aluminium silver [1])	**1747 SI-83**	2CKA001710A4091	10

[1]) Surface painted.

Busch-axcent®

Data communication

Intermediate ring Busch-balance® SI

For attaching cover plates from the Busch-balance® SI range.
Delivery without cover plate.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1747 BSI-81**	2CKA001710A4093	10
aluminium silver [1])	**1747 BSI-83**	2CKA001710A4095	10
studio white	**1747 BSI-84**	2CKA001710A4096	10/100
studio white, matt [1])	**1747 BSI-884**	2CKA001710A4098	10
black matt [1])	**1747 BSI-885**	2CKA001710A4099	10

[1]) Surface painted.

Cover plate [1])

With hinged lid.
For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1746-81**	2CKA001710A3618	10
aluminium silver [2])	**1746-83**	2CKA001710A3678	10
studio white	**1746-84**	2CKA001710A3167	10
studio white, matt [2])	**1746-884**	2CKA001710A3876	10
black matt [2])	**1746-885**	2CKA001710A3898	10

[1]) Combinable only with covers for flush-mounted inserts
[2]) Surface painted.

Intermediate ring with hinged lid [1]) Busch-balance® SI

For attaching cover plates from the Busch-balance® SI range.
Delivery without cover plate.
With sealing ring.
With hinged lid.
Protection class (Device): IP 44
Dimensions: (L x W x D): 63 mm x 63 mm x 20 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**2518-WD-81**	2CKA001719A0217	10
aluminium silver [2])	**2518-WD-83**	2CKA001719A0219	10
studio white	**2518-WD-84**	2CKA001719A0220	10
studio white, matt [2])	**2518-WD-884**	2CKA001719A0222	10
black matt [2])	**2518-WD-885**	2CKA001719A0223	10

[1]) Combinable only with covers for flush-mounted inserts
[2]) Surface painted.

XLR centre plate

As cover for Neutrik plug connectors, type D series.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2553-81**	2CKA001724A4399	10
aluminium silver [1])	**2553-83**	2CKA001724A4401	10
studio white	**2553-84**	2CKA001724A4402	10
studio white, matt [1])	**2553-884**	2CKA001724A4404	10
black matt [1])	**2553-885**	2CKA001724A4405	10

[1]) Surface painted.

Busch-axcent®

Data communication

Equipotential socket outlet 2gang

Without claws.
For connecting wires up to 1 x 6 mm² and 4 x 2.5 mm².
IEC 60601-1:2005; DIN EN 60601 (VDE 0750-1): July 2007
Connection bolts German Standard DIN 42801.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2095 UC-81**	2CKA002495A0084	10
aluminium silver [1]	**2095 UC-83**	2CKA002495A0089	10
studio white	**2095 UC-84**	2CKA002495A0086	10
studio white, matt [1]	**2095 UC-884**	2CKA002495A0091	10
black matt [1]	**2095 UC-885**	2CKA002495A0092	10

[1] Surface painted.

Cover plate with metal mounting plate

With screw-type terminal.
Fixed with central locknut.
As cover for pilot devices with a diameter of 22.5 mm
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2533-81**	2CKA001724A4254	10
aluminium silver [1]	**2533-83**	2CKA001724A4261	10
studio white	**2533-84**	2CKA001724A4256	10
studio white, matt [1]	**2533-884**	2CKA001724A4296	10
black matt [1]	**2533-885**	2CKA001724A4301	10

[1] Surface painted.

Cover plate [1] with metal mounting plate

For communication devices.
With labelling field 60.2 x 10.2 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1758-81**	2CKA001724A4253	10
aluminium silver [2]	**1758-83**	2CKA001724A4263	10
studio white	**1758-84**	2CKA001724A2761	10/100
studio white, matt [2]	**1758-884**	2CKA001710A3881	1
black matt [2]	**1758-885**	2CKA001724A4299	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Surface painted.

Multimedia / communication adapters

Busch-Radio DAB+ [1]

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Control/Signal outputs: 2, Loudspeaker output, impedance 4 Ohm
Rated power: 2 W (RMS)

Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8215 U-101-500	2CKA008200A0276	1/10

[1] No claw. Screw-fixing via keyholes.

Busch-axcent®

Multimedia / communication adapters

Busch-Radio BTconnect DAB+ [1])
With Bluetooth interface for music replay.

DAB+ and RDS stereo radio alarm clock for flush-mounted installation. With high-resolution colour display for showing additional information.
With Bluetooth interface for music replay of mobile devices. Connection of external Bluetooth loudspeakers possible.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Bluetooth specification: 4.2.
Bluetooth profiles supported: A2DP
Number of stored Bluetooth connections: max. 8
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 2 W (RMS)

Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Bluetooth

Colour	Type	Order code	Pack/Qty.
	8217 U-101-500	2CKA008200A0279	1/10

[1]) No claw. Screw-fixing via keyholes.

Loudspeaker insert [1]) 5 cm (2")

With flat plug connector.
With broadband characteristics.
Rated output: 2 W (RMS)
Incl. speaker connection cable.
Frequency response: 200 - 20,000 Hz
Impedance: 4 Ohm
Protection class (Device): IP 20, SELV
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1/10

[1]) No claw. Screw-fixing via keyholes.

Flush Mounted Inserts Flush-mounted installation boxes and inserts

Multi media connector ins.

Colour	Type	Order code	Pack/Qty.
	8231 U	2CKA008200A0223	1/10

USB power adapter insert, flush-mounted [1]) [2])
With USB-A & USB-C interface



For supply and support of mobile devices via USB-cable. With USB type A and USB type C female connector.
To support two devices at the same time.
Supports automatic negotiating of optimum charging parameters for the shortest charging times.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Outputs: 2x USB charging interface
Suitable for: Only USB-A bus occupied:
Rated current: 3000 mA
Output voltage: 5 V-
Suitable for: Only USB-C bus occupied:
Rated power: 18 W

Suitable for: USB-A and USB-C bus occupied. Total:
Rated current: 3250 mA
Output voltage: 5 V-
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

[1]) No claw. Screw-fixing via keyholes.
[2]) No data transfer.

65 W power adapter insert, flush-mounted [1]) [2]) NEW
with USB-C interface

For power and charge of mobile devices via USB-C cable. With USB type C female connector. Supports high power and automatic negotiating of optimum charging parameters for the shortest charging times.
Support of charging protocols: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the Qualcomm quick charge protocols: QC 2.0, 3.0, 4.0 and 5.
Support of USB PD (power delivery): 3.1 incl. PPS (programmable power supply).
Support of manufacturer specific protocolls: Samsung AFC and Huawei FCP (with 20 W).
With electronic short-circuit protection.
With electronic overload protection.
Fitting cover plate: 6479-...-500.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Power loss: < 75 mW
Outputs: 1x USB-C charging interface
Rated power: 65 W
Output voltage: 5 V, 9 V, 12 V, 15 V, 20.0 V DC
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 44 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6479 U-500	2CKA006400A0437	1

[1]) No claw. Screw-fixing via keyholes.
[2]) No data transfer.

Busch-axcent®

Multimedia / communication adapters

HDMI connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link high-definition digital audio and video data from e.g. SAT-receiver, DVD-/Blue-Ray-player to plasma-type, LCD- or-LED-TVs/screens.
HDMI-type A, 3D-compatible.
Fully HD ready (1920 x 1080 pixel).
For 20-wire HDMI-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/31-500**	2CKA000230A0430	1
grey	**0261/33-500**	2CKA000230A0432	1
alpine white	**0261/32-500**	2CKA000230A0431	1

[1] Please follow the recommendations of the cable and device producers for the max. HDMI cable lengths.

VGA connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link analogue video data between PCs and laptops to monitors or digital projectors etc.
VGA-type: D-type, 15-pole.
Fully HD ready (1920 x 1080 pixel).
For 15-wire VGA-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/21-500**	2CKA000230A0424	1
grey	**0261/23-500**	2CKA000230A0426	1
alpine white	**0261/22-500**	2CKA000230A0425	1

[1] Please follow the recommendations of the cable and device producers for the max. VGA cable lengths.

USB connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link mobile devices like e.g. printer, scanner, USB-sticks or digital cameras etc.
USB-type A, USB 2.0 compatible.
For 5-wire USB- cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate. Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/11-500**	2CKA000230A0418	1
grey	**0261/13-500**	2CKA000230A0420	1
alpine white	**0261/12-500**	2CKA000230A0419	1

[1] Please follow the recommendations of the cable and device producers for the max. USB cable lengths.

Communication adapter for BNC-F Duct-jacks

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems. Without cover plate.
Without claws. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0262/11-500**	2CKA000230A0436	1
grey	**0262/13-500**	2CKA000230A0438	1
alpine white	**0262/12-500**	2CKA000230A0437	1

F duct-jack for communication adapter

For connection of antenna cables e.g.. for TVs with integrated TV-tuner and satellite receiver.
With screw-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**0262-500**	2CKA000230A0440	1

Communication adapter for Cinch-jacks



Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems. Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0263/11-500**	2CKA000230A0444	1
grey	**0263/13-500**	2CKA000230A0446	1
alpine white	**0263/12-500**	2CKA000230A0445	1

Busch-axcent®

Multimedia / communication adapters

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked white: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
alpine white	**0263/04-500**	2CKA000230A0451	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked black: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
black	**0263/05-500**	2CKA000230A0452	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked red: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Red	**0263/06-500**	2CKA000230A0453	1

Cinch-jacks for communication adapter

For connecting analogue video devices, such as DVD players, hard disc recorders, video recorders or receivers.
Marked yellow: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
yellow	**0263/07-500**	2CKA000230A0454	1

Communication adapter for Mini-jacks 3,5mm.

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate. Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0264/11-500**	2CKA000230A0458	1
grey	**0264/13-500**	2CKA000230A0460	1
alpine white	**0264/12-500**	2CKA000230A0459	1

Mini-jack 3,5 mm for communication adapter

For the connection of mobile terminal devices such as MP3 player (stereo), mobile telephone and smartphones.
Audio-band 20Hz - 20kHz.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
chrome gloss	**0264-500**	2CKA000230A0462	1

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back).
With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0248/02-101**	2CKA000230A0402	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back).
With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back).
With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**0248/05-101**	2CKA000230A0404	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Busch-axcent®

Multimedia / communication adapters

Cover plate

For Busch-Radio DAB+ 8215 U-101.
For Busch-Radio BTconnect DAB+ 8217 U-101.
For Busch-Radio iNet 8216 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**8252-81-101-500**	2CKA008200A0249	10
aluminium silver [1])	**8252-83-101-500**	2CKA008200A0253	10
studio white	**8252-84-101-500**	2CKA008200A0255	10
studio white matt [1])	**8252-884-101-500**	2CKA008200A0259	10
black matt [1])	**8252-885-101-500**	2CKA008200A0261	10

[1]) Surface painted.

Cover plate

For loudspeaker insert 8223 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**8253-81**	2CKA008200A0078	1/10
aluminium silver [1])	**8253-83**	2CKA008200A0080	1/10
studio white	**8253-84**	2CKA008200A0081	1/10
studio white, matt [1])	**8253-884**	2CKA008200A0123	1/10
black matt [1])	**8253-885**	2CKA008200A0126	1/10

[1]) Surface painted.

CoverPlates (partly incl. Insert) Hotel application

C-plate media connector.

Colour	Type	Order code	Pack/Qty.
studio white	**8256-81**	2CKA008200A0227	1/10
aluminium silver [1])	**8256-83**	2CKA008200A0225	1/10
studio white, matt [1])	**8256-84**	2CKA008200A0224	1/10
anthracite	**8256-803**	2CKA008200A0230	1/10
black matt [1])	**8256-884**	2CKA008200A0226	1/10
grey metallic [1])	**8256-885**	2CKA008200A0228	1/10

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter. USB power adapter insert 6475 U-500.
For loudspeaker connection box.
Suitable for part number 0248/0x-101.
For data modules.
Suitable for Art. No. 0219/12 and 0219/13.
For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1766-81**	2CKA001710A3613	10
aluminium silver [1])	**1766-83**	2CKA001710A3659	10/100
studio white	**1766-84-500**	2CKA001710A3992	10/100
studio white, matt [1])	**1766-884**	2CKA001710A3926	10
black matt [1])	**1766-885**	2CKA001710A3903	10

[1]) Surface painted.

Cover plate for power adapter insert

NEW

Cover plate for USB-C 65 W power adapter 6479 U-500.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**6479-81-500**	2CKA006400A0444	1
aluminium silver [1])	**6479-83-500**	2CKA006400A0448	1
studio white	**6479-84-500**	2CKA006400A0450	1
studio white, matt [1])	**6479-884-500**	2CKA006400A0452	1
black matt [1])	**6479-885-500**	2CKA006400A0454	1

[1]) Surface painted.

Cover plate with metal mounting plate

With fixing claws. loudspeaker inserts and cover.
With soldering tag.
For covering universal data communication connectors and circular connectors with screwed plug M 16x0.75 (installable in insert) in accordance with DIN 41524, 41529, 45322, 45327, 45328 and 45329.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1751-81**	2CKA001723A0253	10
aluminium silver [1])	**1751-83**	2CKA001723A0254	10
studio white	**1751-84**	2CKA001723A0240	10/100
studio white, matt [1])	**1751-884**	2CKA001710A3880	1
black matt [1])	**1751-885**	2CKA001723A0259	10

[1]) Surface painted.

Busch-axcent®
Room thermostats

Cover plate with rotary control, with marking

As a cover for volume controllers.
Suitable for the >LR mono BJ FM< devices of WHD.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1740 DR/03-81**	2CKA001710A4120	10
aluminium silver [1]	**1740 DR/03-83**	2CKA001710A3811	10
studio white	**1740 DR/03-84**	2CKA001710A3808	10
studio white, matt [1]	**1740 DR/03-884**	2CKA001710A3870	10
black matt [1]	**1740 DR/03-885**	2CKA001710A3892	10

[1] Surface painted.

Cover plate for Busch-powerDock

For Busch-powerDock charging cradle.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**6477-81**	2CKA006400A0056	10
aluminium silver [1]	**6477-83**	2CKA006400A0058	10
studio white	**6477-84**	2CKA006400A0059	10/100
studio white matt [1]	**6477-884**	2CKA006400A0062	10
black matt [1]	**6477-885**	2CKA006400A0063	10

[1] Surface painted.

Room thermostat, flush-mounted [1] [2] [3]

END OF LIFE

Switch contact opens when the set temperature is reached. With fixing claws. Separate terminal to activate nighttime mode and reduction of room temperature by 4K. Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~. Rated current: 10 A.
Temperature range (Device): 5 °C to 30 °C.
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0512	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Slide switch

END OF LIFE

With built-in slide switch and control lamp for nightly reduction of 4 K. Switch contact opens when the set temperature is reached. With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%.. Rated voltage: 230 V~. Rated current: 10 A. Temperature range (Device): 5 °C to 30 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 U-500	2CKA001032A0514	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Sliding switch, 24 V

END OF LIFE

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~
Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 U	2CKA001032A0485	1
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Busch-axcent®

Room thermostats

Room thermostat, flush-mounted [1] [2] [3] 1gang 2way

END OF LIFE

With fixing claws.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 U-101-500	2CKA001032A0513	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Actual value indication

END OF LIFE

With actual value temperature display. Automatic controller calibration. Switch contact opens when the set temperature is reached. With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 UTA	2CKA001032A0487	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Sliding switch, actual value indication

END OF LIFE

With actual value temperature display. Automatic controller calibration. Switch contact opens when the set temperature is reached. With built-in slide switch and control lamp for nightly reduction of 4 K.
With fixing claws. Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UTA	2CKA001032A0488	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Sliding switch, actual value indication, 24 V

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached. With built-in slide switch and control lamp for nightly reduction of 4 K. With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~. Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 UTA	2CKA001032A0489	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Change-over contact, actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
With fixing claws. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 5 A
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 UTA	2CKA001032A0490	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Change-over contact, setpoint indication, timer

END OF LIFE

With change-over contact.
Easy adjustment using menu and text-based display.
4 switching times per day can be user-defined for each day of the week. With fixing claws.
Automatic summer/wintertime switch-over
Power reserve > 10 hours.
To fit cover plate 6435-xxx.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 U-101	2CKA001032A0508	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Busch-axcent®

Room thermostats

Room thermostat, flush-mounted [1]) Remote sensor

END OF LIFE

With remote sensor and thermal feedback
For underfloor heating. With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached. With fixing claws. Remote sensor cable length: 4 m. Sensor =NTC, 10 kilo-ohm at 25 degrees C.
Adjusting range: +10 to +50° C. Connecting cable: 1mm² to 2.5 mm². Separate terminal to activate nighttime mode and reduction of room temperature by 4K. Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~. Rated current: 16 A, cos ϕ 1. Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UF	2CKA001032A0497	1/10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Room thermostat, flush-mounted [1]) [2]) Change-over contact, setpoint indication, timer, remote sensor

With change-over contact. Easy adjustment using menu and text-based display. 4 switching times per day can be user-defined for each day of the week. With fixing claws.
Automatic summer/wintertime switch-over
Remote sensor cable length: 4 m.
Sensor =NTC, 10 kilo-ohm at 25 degrees C.
Power reserve > 10 hours. To fit cover plate 6435-xxx.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 16 A
Temperature range (Device): 10 °C to 50 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 UF-101	2CKA001032A0509	1/10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.

Room Thermostat

NEW

Electronic room thermostat, open contact, fm
Normally open contact, non-isolated. Switch contact opens when the set temperature is reached. Without fixing claws. Separate terminal to activate eco mode to reduce the room temperature by 3K.
See respective cover plates 1794 R-xx. Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~. Power dissipation: ≤ 0,15 W. Rated current: 10 A. Temperature range (device): 5 °C - 30 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mm. Protection class device: IP 20. Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete. Servo-valves, "de-energised open", are necessary for connection to thermostat. e.g. Article No. 6164/10-102. Switching temperature difference: ± 0.5 K

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0525	1/10
	1097 U-101-500	2CKA001032A0528	1/10
	1099 UHK-101-500	2CKA001032A0531	1/10

Cover Plate Thermostat Turn button - 63x63

NEW

C-plate for room thermostats 1094 U-101, 1097 U-101, 1099 U-101.

Colour	Type	Order code	Pack/Qty.
anthracite	**1794 R-81**	2CKA001710A4198	10
aluminium silver [1])	**1794 R-83**	2CKA001710A4200	10
studio white	**1794 R-84**	2CKA001710A4201	10
studio white, matt [1])	**1794 R-884**	2CKA001710A4204	10
black matt [1])	**1794 R-885**	2CKA001710A4205	10

[1]) Surface painted.

Room thermostat, flush-mounted [1]) [2]) [3]) Heating/cooling

END OF LIFE

With separate connection (230 V~) for external switchover between heating or cooling. Switch contact opens when the set temperature is reached. With fixing claws. Nominal current: 10 A heating. Nominal current: 5 A cooling. Class of temperature controller 1 Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~. Temperature range (Device): 5 °C to 30 °C. Dimensions: (L x W x D): 12 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1099 UHK-101-500	2CKA001032A0515	1/10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3]) Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1]) [2]) [3]) Heating/cooling, sliding switch

END OF LIFE

With built-in sliding switch for switchover between cooling or heating. Switch contact opens when the set temperature is reached.
With fixing claws.
Nominal current: 10 A heating.
Nominal current: 5 A cooling. Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~
Temperature range (Device): 5 °C to 30 °C.
Dimensions: (L x W x D): 12 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1099 UHKEA	2CKA001032A0516	1/10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2]) Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3]) Switching temperature difference: ± 0.5 K.

Busch-axcent®

Room thermostats

RTC Room Temperature Controller

NEW



Room Temperature Controller for Room thermostat Bluetooth with Setpoint display, Timer and Remote control Button 230 V

Colour	Type	Order code	Pack/Qty.
	1095 UTA-BT-500	2CKA001032A0534 Insert - Bluetooth	1
	1094 USITA-BT-500	2CKA001032A0536 Insert - Bluetooth	1
	1096 UTA-BT-500	2CKA001032A0538 Insert - Bluetooth	1
	1099 UHKTA-BT-500	2CKA001032A0540 Insert - Bluetooth	1
	62841 U-WL-500	2CKA006800A3115 Insert - free@home	1
	62842 U-WL-500	2CKA006800A3117 Insert - free@home	1
	62843 U-WL-500	2CKA006800A3119 Insert - free@home	1

Cover plate for room thermostat

For room thermostats 1094 U, 1097 U.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1794-81**	2CKA001710A3629	10
aluminium silver [1])	**1794-83**	2CKA001710A3668	10
studio white	**1794-84**	2CKA001710A3544	10
studio white, matt [1])	**1794-884**	2CKA001710A3884	10
black matt [1])	**1794-885**	2CKA001710A3907	10

[1]) Surface painted.

Cover plate for room thermostat

With sliding switch for nightly room temperature reduction. to activate nighttime mode and reduction of room temperature by 4K, for thermostats 1095 U, 1096 U and 1095 UF.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1795-81**	2CKA001710A3630	10
aluminium silver [1])	**1795-83**	2CKA001710A3669	10
studio white	**1795-84**	2CKA001710A3569	10
studio white, matt [1])	**1795-884**	2CKA001710A3886	10
black matt [1])	**1795-885**	2CKA001710A3909	10

[1]) Surface painted.

Cover plate for room thermostat

For room thermostats 1094 UTA, 1097 UTA.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1794 TA-81**	2CKA001710A3695	10
aluminium silver [1])	**1794 TA-83**	2CKA001710A3697	10
studio white	**1794 TA-84**	2CKA001710A3698	10
studio white, matt [1])	**1794 TA-884**	2CKA001710A3883	10
black matt [1])	**1794 TA-885**	2CKA001710A3906	10

[1]) Surface painted.

Cover plate for room thermostat

With sliding switch for nightly room temperature reduction. For room thermostats 1095 UTA, 1096 UTA.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1795 TA-81**	2CKA001710A3722	10
aluminium silver [1])	**1795 TA-83**	2CKA001710A3724	10
studio white	**1795 TA-84**	2CKA001710A3725	10
studio white, matt [1])	**1795 TA-884**	2CKA001710A3885	10
black matt [1])	**1795 TA-885**	2CKA001710A3908	10

[1]) Surface painted.

Cover plate

For room thermostats 1098 U-101 and 1098 UF-101.
For short-time timer 6465 U-101.
For Busch-CO2 sensor 1091 U-500.
For blind compact timer 6422 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6435-81**	2CKA006430A0303	10
aluminium silver [1])	**6435-83**	2CKA006430A0305	10
studio white	**6435-84**	2CKA006430A0306	10
studio white, matt [1])	**6435-884**	2CKA006430A0388	10
black matt [1])	**6435-885**	2CKA006430A0389	10

[1]) Surface painted.

Busch-axcent®

Room thermostats

Cover plate for room thermostat

For room temperature controller 1099 UHK.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1795 HK-81**	2CKA001710A4013	10
aluminium silver [1])	**1795 HK-83**	2CKA001710A4016	10
studio white	**1795 HK-84**	2CKA001710A4017	10
studio white, matt [1])	**1795 HK-884**	2CKA001710A4019	10
black matt [1])	**1795 HK-885**	2CKA001710A4020	10

[1]) Surface painted.

Cover plate for room thermostat

For room temperature controller 1099 UHKEA.
With sliding switch for switchover between cooling or heating.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1795 HKEA-81**	2CKA001710A4045	10
aluminium silver [1])	**1795 HKEA-83**	2CKA001710A4048	10
studio white	**1795 HKEA-84**	2CKA001710A4049	10
studio white, matt [1])	**1795 HKEA-884**	2CKA001710A4051	10
black matt [1])	**1795 HKEA-885**	2CKA001710A4052	10

[1]) Surface painted.

Cover Plate, Thermostat Various symbols for Thermostat anthracite - Platform 63

NEW

Central plate with print for room temperature controller with display/Bluetooth or free@home wireless
For room temperature controller with display:
1094 USITA-BT - 1095 UTA-BT - 1096 UTA-BT -
1099 UHKTA-BT - 62841 U-WL - 62842 U-WL - 62843 U-W

Colour	Type	Order code	Pack/Qty.
anthracite	**1794 MDRT-81**	2CKA006430A0417	
aluminium silver [3])	**1794 MDRT-83**	2CKA006430A0419	
studio white	**1794 MDRT-84-500**	2CKA006430A0421	
studio white matt [1])	**1794 MDRT-884**	2CKA006430A0423	
black matt [3])	**1794 MDRT-885**	2CKA006430A0424	

[1]) Surface painted.

LED light

Cover plate [1]) [2])

As cover for flush-mounted info light.
For insert 2062 U.
Size of information field 43 x 43 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1716-81**	2CKA001731A1921	1
aluminium silver [3])	**1716-83**	2CKA001731A1950	1
studio white	**1716-84**	2CKA001731A1923	1
studio white, matt [3])	**1716-884**	2CKA001731A1978	1
black matt [3])	**1716-885**	2CKA001731A1980	1

[1]) Included with the cover are 46 different text labels and symbols.
[2]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3]) Surface painted.

Cap for indication lamp

For indication lamps.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
clear-transparent	**1565-11**	2CKA001565A0167	10
Red	**1565-12**	2CKA001565A0175	10
green	**1565-13**	2CKA001565A0183	10

Busch-axcent®

Busch-Infoline®

Accessories

Cover plate [1] [2] 1gang, with labelling field

With operating knob.
For signal/cancel push-button 1520/1 UK.
For monitoring unit 1511 U.
For Busch-Leakage guard insert 1531 U.
With labelling field 61 x 20 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1571 CN-84**	2CKA001582A0346	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] 2gang, with labelling field

With operating knob.
For signal push-button insert 1520/1 UKZ.
With labelling field 61 x 20 mm.
With exchangeable inlays in read and green for the individual designation of the operating knob.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1572 CN-84**	2CKA001582A0348	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] with red and neutral light panel and labelling field

For Alarm Control Unit insert 1515 U-12.
For Busch-Alarm signal insert 1563 U-12.
For indication lamp insert 1564 U-1x.
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1573 CN-84**	2CKA001582A0350	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] 6gang, illuminable, with labelling field

For signal panel insert 1566 U.
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1575 CN-84**	2CKA001582A0353	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] with labelling field

For power supply insert 1518 U.
For relay insert 1539 U.
For signal generator insert 1561 U-....
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1576 CN-84**	2CKA001582A0355	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Busch-axcent®

Accessories

Mounting set Busch-axcent® flat [1] [2] [3]

For flat flush-mounted installation, stonework
Suitable for Busch-axcent® frames without carrier.
With plastering moulding tool and positioning device.
With integrated RFID-chip for easy detection.
With vertically adjustable rotary ring.
With Torx/slotted screws.
With variable basement depth.
Mounting boxes are combinable directly.
With flex knockouts for cables or pipes.
The boxes need to be plastered.
Hole size : 82 mm
Protection class (Device): IP 20
Dimensions: (L x W x D): 82 mm

Colour	Type	Order code	Pack/Qty.
	1gang		
	3048/10	2CKA001740A0061	1
	2gang		
	3048/20	2CKA001740A0062	1
	3gang		
	3048/30	2CKA001740A0063	1
	4gang		
	3048/40	2CKA001740A0064	1
	5gang		
	3048/50	2CKA001740A0065	1

[1] Carrier needs to remove from Busch-axcent® cover frame.
[2] RFID = Radio Frequency IDentification
[3] Not suitable for fixing claws.

Mounting set Busch-axcent® flat [1]

For flat flush-mounted installation, hollow wall
Suitable for Busch-axcent® frames without carrier.
For double planking.
With positioning device and adapter rings.
Suitable for drywalls and plasterboards for 9,5 mm, 10 mm and 12,5 mm.
With Torx/slotted screws.
Mounting boxes are combinable directly.
With flex knockouts for cables or pipes.
Fast installation via cable strap latches.
A 74 mm diameter moulding cutter with countersink is needed.
Hole size : 74 mm
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1gang		
	3058/10	2CKA001740A0072	1
	2gang		
	3058/20	2CKA001740A0073	1
	3gang		
	3058/30	2CKA001740A0074	1
	4gang		
	3058/40	2CKA001740A0075	1
	5gang		
	3058/50	2CKA001740A0076	1

[1] Carrier needs to remove from Busch-axcent® cover frame.

Busch-axcent®
Accessories

RFID-Detector [1])

To recover of RFID-chips.
Power supply: 9V alkaline cell (included in delivery).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	3049	2CKA001740A0070	1

[1]) RFID = Radio Frequency IDentification

Compensation rings for flush-mounted boxes

For additional compensation for too deep mounted flush-mounted boxes.
Adjustment height: 2,6 mm
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	3057	2CKA001740A0081	10

Extension of claws [1])

For the installation of flush-mounted SCHUKO® socket outlets and also switches, push-buttons, etc. and deeply installed flush-mounted boxes.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2148	2CKA002148A0120	100

[1]) Not suitable for types 2000/3 US, 2000/6/2 US, 2000/6/6 US-101 and double socket outlets.

Braille symbol

Self-adhesive (transparent) for cover 2506-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	light		
	2144 LI	2CKA001714A0295	10/1000
	bell		
	2144 KI	2CKA001714A0296	10/1000
	key		
	2144 TR	2CKA001714A0297	10/1000

Braille symbol socket outlet

Self-adhesive, transparent for SCHUKO® socket outlets with hinged lid 20 EUK-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2144 ST	2CKA001714A0298	10/1000

DIN A 4 labelling sheet [1]) plastic foil

Suitable for all to be labeled Busch-Jaeger devices.
For laser printer.
The text of the foil is printed via the Busch-Jeager labeling service.
Dimensions: (L x W x D): 297 mm

Colour	Type	Order code	Pack/Qty.
translucent	**1799/02**	2CKA001799A0959	1
transparent	**1799/03**	2CKA001799A0960	1

[1]) 1 piece = 1 sheet.

RC suppressor

For protection against the damage or destruction of electronic devices due to overvoltages.
For wiring network-interconnected inductivities (e.g.. relay, protection, fluorescent lamps, transformers, etc.).
Eliminates functional disturbances on electronic devices, e.g. automatic circuit reclosure (clocking) of a movement detector.
Dimensions: diameter 25 mm, length 35 mm, length of the connecting cable approx. 100 mm.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz

Colour	Type	Order code	Pack/Qty.
	6899	2CKA006899A0231	10

Busch-axcent®
Cover frames

Cover frame [1]) 1gang frame

Protection class (Device): IP 20
Dimensions: (L x W x D): 91 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1721-284**	2CKA001754A4331	10
black	**1721-281**	2CKA001754A4409	10
maison-beige	**1721-299-500**	2CKA001754A4481	10
entrée-grey	**1721-291-500**	2CKA001754A4471	10
château-black	**1721-295-500**	2CKA001754A4491	10
yellow	**1721-285**	2CKA001754A4334	10
green	**1721-286**	2CKA001754A4337	10
Red	**1721-287**	2CKA001754A4340	10
blue	**1721-288**	2CKA001754A4343	10

Cover frame [1]) 2gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 162 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1722-284**	2CKA001754A4332	10
black	**1722-281**	2CKA001754A4410	10
maison-beige	**1722-299-500**	2CKA001754A4482	10
entrée-grey	**1722-291-500**	2CKA001754A4472	10
château-black	**1722-295-500**	2CKA001754A4492	10
yellow	**1722-285**	2CKA001754A4335	10
green	**1722-286**	2CKA001754A4338	10
Red	**1722-287**	2CKA001754A4341	10
blue	**1722-288**	2CKA001754A4344	10

Cover frame [1]) 3gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 233 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1723-284**	2CKA001754A4333	10
black	**1723-281**	2CKA001754A4411	10
maison-beige	**1723-299-500**	2CKA001754A4483	10
entrée-grey	**1723-291-500**	2CKA001754A4473	10
château-black	**1723-295-500**	2CKA001754A4493	10
yellow	**1723-285**	2CKA001754A4336	10
green	**1723-286**	2CKA001754A4339	10
Red	**1723-287**	2CKA001754A4342	10
blue	**1723-288**	2CKA001754A4345	10

Cover frame [1]) 4gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 304 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1724-284**	2CKA001754A4346	1
black	**1724-281**	2CKA001754A4412	1
maison-beige	**1724-299-500**	2CKA001754A4484	1
entrée-grey	**1724-291-500**	2CKA001754A4474	1
château-black	**1724-295-500**	2CKA001754A4494	1
yellow	**1724-285**	2CKA001754A4348	1
green	**1724-286**	2CKA001754A4350	1
Red	**1724-287**	2CKA001754A4352	1
blue	**1724-288**	2CKA001754A4354	1

Cover frame 5gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 375 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
studio white [1])	**1725-284**	2CKA001754A4347	1
black [1])	**1725-281**	2CKA001754A4413	1
maison-beige	**1725-299-500**	2CKA001754A4485	1
entrée-grey [1])	**1725-291-500**	2CKA001754A4475	1
château-black [1])	**1725-295-500**	2CKA001754A4495	1
yellow [1])	**1725-285**	2CKA001754A4349	1
green [1])	**1725-286**	2CKA001754A4351	1
Red [1])	**1725-287**	2CKA001754A4353	1
blue [1])	**1725-288**	2CKA001754A4355	1

[1]) Flat mounting possible, a mounting set flat Art.No. 30x8/xx must be used as a flush-mounted box.

Busch-axcent® flat
Cover frames

Cover frame Busch-axcent® flat 1gang frame

For flat flush mounting.
Only suitable with Busch-axcent® flat mounting set.
Without carrier.
Protection class (Device): IP 20
Dimensions: (L x W x D): 91 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
black	**1721-281/11**	2CKA001753A4126	10
studio white	**1721-284/11**	2CKA001753A4121	10

Cover frame Busch-axcent® flat 2gang frame

For flat flush mounting.
Only suitable with Busch-axcent® flat mounting set.
For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 162 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
black	**1722-281/11**	2CKA001753A4127	10
studio white	**1722-284/11**	2CKA001753A4122	10

Cover frame Busch-axcent® flat 3gang frame

For flat flush mounting.
Only suitable with Busch-axcent® flat mounting set.
For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 233 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
black	**1723-281/11**	2CKA001753A4128	10
studio white	**1723-284/11**	2CKA001753A4123	10

Cover frame Busch-axcent® flat 4gang frame

For flat flush mounting.
Only suitable with Busch-axcent® flat mounting set.
For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 304 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
black	**1724-281/11**	2CKA001753A4129	1
studio white	**1724-284/11**	2CKA001753A4124	1

Cover frame Busch-axcent® flat 5gang frame

For flat flush mounting.
Only suitable with Busch-axcent® flat mounting set.
For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 375 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
black	**1725-281/11**	2CKA001753A4130	1
studio white	**1725-284/11**	2CKA001753A4125	1

Busch-axcent® pur
Cover frames

Cover frame 1gang frame

Protection class (Device): IP 20
Dimensions: (L x W x D): 91 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
slate grey [1] [2] [3] [4]	**1721-290**	2CKA001754A4805	1
concrete grey [1] [2] [3] [4]	**1721-298**	2CKA001754A4795	1
paper blue [1] [2] [3]	**1721-248**	2CKA001754A4785	1
paper brown [1] [2] [3]	**1721-243**	2CKA001754A4790	1
glass coral	**1721-227**	2CKA001754A4765	1
glass avocado	**1721-226**	2CKA001754A4770	1
glass purple	**1721-223**	2CKA001754A4775	1
glass oyster	**1721-229**	2CKA001754A4780	1
glass ocean	**1721-228**	2CKA001754A4755	1
glass sun	**1721-225**	2CKA001754A4760	1
platinum [5] [6]	**1721-270-500**	2CKA001754A4688	1
black matt [5] [6]	**1721-275-500**	2CKA001754A4708	1
titanium [5] [6]	**1721-276-500**	2CKA001754A4698	1
white glass	**1721-280**	2CKA001754A4437	1
glass black	**1721-245**	2CKA001754A4800	1

[1] Genuine material with an individual surface.
[2] Genuine material with an open-pore surface.
[3] Each cover frame is unique in structure and color nuance.
[4] Genuine material with reduced resistance against mechanical stress.
[5] Real metal surface.
[6] Flat mounting possible, a mounting set flat Art.No. 30x8/xx must be used as a flush-mounted box.

Busch-axcent® pur

Cover frames

Cover frame 2gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 162 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
slate grey [1] [2] [3] [4]	**1722-290**	2CKA001754A4806	1
concrete grey [1] [2] [3] [4]	**1722-298**	2CKA001754A4796	1
paper blue [1] [2] [3]	**1722-248**	2CKA001754A4786	1
paper brown [1] [2] [3]	**1722-243**	2CKA001754A4791	1
glass coral	**1722-227**	2CKA001754A4766	1
glass avocado	**1722-226**	2CKA001754A4771	1
glass purple	**1722-223**	2CKA001754A4776	1
glass oyster	**1722-229**	2CKA001754A4781	1
glass ocean	**1722-228**	2CKA001754A4756	1
glass sun	**1722-225**	2CKA001754A4761	1
platinum [5] [6]	**1722-270-500**	2CKA001754A4689	1
black matt [5] [6]	**1722-275-500**	2CKA001754A4709	1
titanium [5] [6]	**1722-276-500**	2CKA001754A4699	1
white glass	**1722-280**	2CKA001754A4438	1
glass black	**1722-245**	2CKA001754A4801	1

[1] Genuine material with an individual surface.
[2] Genuine material with an open-pore surface.
[3] Each cover frame is unique in structure and color nuance.
[4] Genuine material with reduced resistance against mechanical stress.
[5] Real metal surface.
[6] Flat mounting possible, a mounting set flat Art.No. 30x8/xx must be used as a flush-mounted box.

Cover frame 3gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 233 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
slate grey [1] [2] [3] [4]	**1723-290**	2CKA001754A4807	1
concrete grey [1] [2] [3] [4]	**1723-298**	2CKA001754A4797	1
paper blue [1] [2] [3]	**1723-248**	2CKA001754A4787	1
paper brown [1] [2] [3]	**1723-243**	2CKA001754A4792	1
glass coral	**1723-227**	2CKA001754A4767	1
glass avocado	**1723-226**	2CKA001754A4772	1
glass purple	**1723-223**	2CKA001754A4777	1
glass oyster	**1723-229**	2CKA001754A4782	1
glass ocean	**1723-228**	2CKA001754A4757	1
glass sun	**1723-225**	2CKA001754A4762	1
platinum [5] [6]	**1723-270-500**	2CKA001754A4690	1
black matt [5] [6]	**1723-275-500**	2CKA001754A4710	1
titanium [5] [6]	**1723-276-500**	2CKA001754A4700	1
white glass	**1723-280**	2CKA001754A4439	1
glass black	**1723-245**	2CKA001754A4802	1

[1] Genuine material with an individual surface.
[2] Genuine material with an open-pore surface.
[3] Each cover frame is unique in structure and color nuance.
[4] Genuine material with reduced resistance against mechanical stress.
[5] Real metal surface.
[6] Flat mounting possible, a mounting set flat Art.No. 30x8/xx must be used as a flush-mounted box.

Busch-axcent® pur

Cover frames

Cover frame 4gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 304 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
slate grey [1] [2] [3] [4]	**1724-290**	2CKA001754A4808	1
concrete grey [1] [2] [3] [4]	**1724-298**	2CKA001754A4798	1
paper blue [1] [2] [3]	**1724-248**	2CKA001754A4788	1
paper brown [1] [2] [3]	**1724-243**	2CKA001754A4793	1
glass coral	**1724-227**	2CKA001754A4768	1
glass avocado	**1724-226**	2CKA001754A4773	1
glass purple	**1724-223**	2CKA001754A4778	1
glass oyster	**1724-229**	2CKA001754A4783	1
glass ocean	**1724-228**	2CKA001754A4758	1
glass sun	**1724-225**	2CKA001754A4763	1
platinum [5] [6]	**1724-270-500**	2CKA001754A4691	1
black matt [5] [6]	**1724-275-500**	2CKA001754A4711	1
titanium [5] [6]	**1724-276-500**	2CKA001754A4701	1
white glass	**1724-280**	2CKA001754A4440	1
glass black	**1724-245**	2CKA001754A4803	1

[1] Genuine material with an individual surface.
[2] Genuine material with an open-pore surface.
[3] Each cover frame is unique in structure and color nuance.
[4] Genuine material with reduced resistance against mechanical stress.
[5] Real metal surface.
[6] Flat mounting possible, a mounting set flat Art.No. 30x8/xx must be used as a flush-mounted box.

Cover frame 5gang frame

For vertical or horizontal installation.
Protection class (Device): IP 20
Dimensions: (L x W x D): 375 mm x 91 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
slate grey [1] [2] [3] [4]	**1725-290**	2CKA001754A4809	1
concrete grey [1] [2] [3] [4]	**1725-298**	2CKA001754A4799	1
paper blue [1] [2] [3]	**1725-248**	2CKA001754A4789	1
paper brown [1] [2] [3]	**1725-243**	2CKA001754A4794	1
glass coral	**1725-227**	2CKA001754A4769	1
glass avocado	**1725-226**	2CKA001754A4774	1
glass purple	**1725-223**	2CKA001754A4779	1
glass oyster	**1725-229**	2CKA001754A4784	1
glass ocean	**1725-228**	2CKA001754A4759	1
glass sun	**1725-225**	2CKA001754A4764	1
platinum [5] [6]	**1725-270-500**	2CKA001754A4692	1
black matt [5]	**1725-275-500**	2CKA001754A4712	1
titanium [5] [6]	**1725-276-500**	2CKA001754A4702	1
white glass	**1725-280**	2CKA001754A4441	1
glass black	**1725-245**	2CKA001754A4804	1

[1] Genuine material with an individual surface.
[2] Genuine material with an open-pore surface.
[3] Each cover frame is unique in structure and color nuance.
[4] Genuine material with reduced resistance against mechanical stress.
[5] Real metal surface.
[6] Flat mounting possible, a mounting set flat Art.No. 30x8/xx must be used as a flush-mounted box.

Notes

future® linear
Embrace the unknown.

Timeless design combined with functionality, make for the perfect wiring accessory. Clear straight lines and harmonious colours which will last forever. Light switch with a soft and velvety touch fascinates the senses. Perfectly matches a modern style of living. Endless delight.

01 anthracite
02 ivory white
03 aluminiumsilver
04 studio white
05 black matt*
06 white matt*

Materials
Cover: thermoplastic cover (PC), impact-proof and fracture-resistant, UV-resistant, free of PVC and halogen.

* Softtouch: stimulating colours with pleasant haptics and a hard-wearing surface.

future® linear

Selected functions.

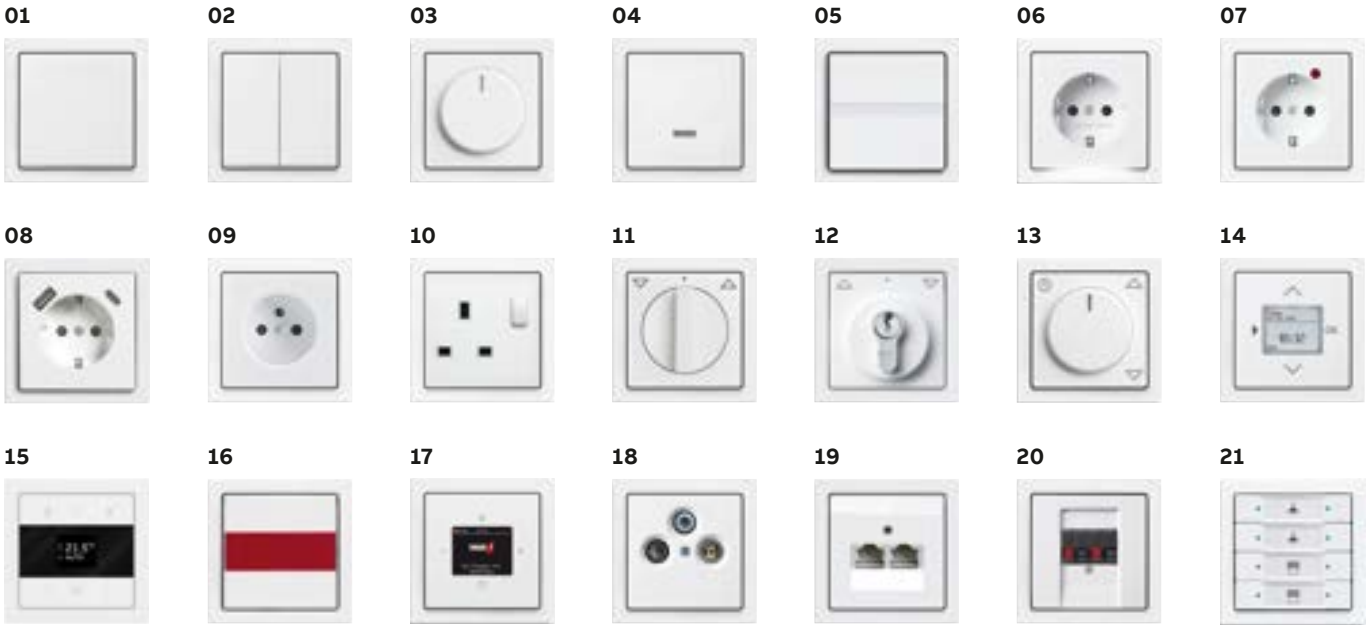

01 Rocker switch 1gang
02 Rocker switch 2gang
03 Busch Universal Rotary Dimmer
04 Touch dimmer
05 Busch-Comfort switch
06 Busch-steplight®
07 Busch-Protector® SCHUKO® socket outlet with overvoltage protection
08 SCHUKO® USB socket outlet, USB A&C
09 Socket outlet with earthing pin
10 Switched socket outlet BS standard
11 Blind switch with rotary knob
12 Busch-Blind control switch with semi-cylindrical lock
13 Busch-Blind comfort switch
14 Comfort timer
15 Room thermostat with display
16 Busch-Infoline® alarm insert
17 Busch-Radio DAB+
18 Antenna socket for radio/TV/satellite
19 Universal data connection box
20 Stereo loudspeaker connecting box
21 KNX sensor, for more KNX products see part 12 of the catalogue - Intelligent Building Solutions

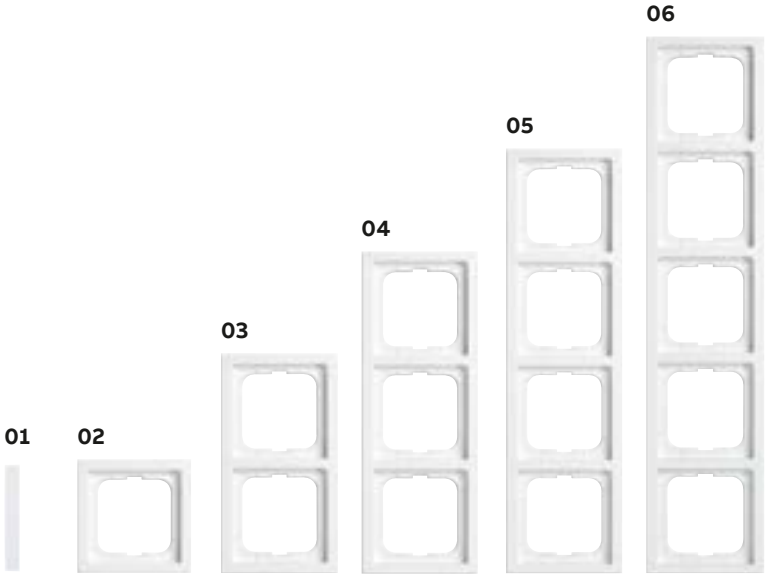

1 to 5gang cover frame for horizontal and vertical installation.
01 Side view, 11 mm x 80 mm
02 80 mm x 80 mm
03 80 mm x 151 mm
04 80 mm x 222 mm
05 80 mm x 293 mm
06 80 mm x 364 mm

Cover frames for both horizontal and vertical installation in 1-4gang, are also avaiable with labelling field.
Colour: studio white

For more information about light switch ranges visit ABB global web sites.

future® linear

Rocker switches / push switches

Rocker Switch Mechanism [1]



Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way		
	2000/6 US-500	2CKA001012A2198	10/100
	2gang 1way		
	2000/5 US-500	2CKA001012A1150	10/100
	DP, 1gang 2way [2]		
	2000/6/2 US	2CKA001012A0954	10
	1gang		
	2000/7 US-500	2CKA001012A2199	10/100
	DP, 1gang 1way		
	2000/2 US-500	2CKA001012A2196	10/100
	SP, 1gang 1way switch		
	2000/1 US-500	2CKA001012A2059	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1]

Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	Switch-off and two-way circuit 16 A		
	2400/6 US-500	2CKA001012A2232	10/100
	2gang switch 16 A		
	2400/5 US-500	2CKA001012A2234	10
	1gang intermediate 16 A		
	2400/7 US-500	2CKA001012A2236	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1] 2gang 2way

With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/6/6US-101-500	2CKA001011A0928	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1]
Changeover/changeover circuit 16 A

With screwless terminals.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6/6US-101-500	2CKA001022A0663	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism [1] [2] DP, 1gang 1way



For switching high loads.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/2 US-101-500	2CKA001012A2193	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Also for switching SCHUKO® socket outlets.

Rocker Switch Mechanism [1] [2] 3-pole, 1gang 1way switch

Rated voltage: 400 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/3 US	2CKA001011A0816	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] With screw-type terminals. Non-illuminable.

Rocker Switch Mechanism [1]

With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way [2]		
	2000/6 USGL-500	2CKA001012A2194	10/100
	2gang 1way		
	2000/5 USGL	2CKA001012A1135	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.

future® linear

Rocker switches / push switches

Rocker Switch Mechanism, control [1]
2gang switch with N-clamp 16 A

With LED.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/5 USK-500	2CKA001012A2238	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker Switch Mechanism, control [1] [2] [3]



With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	1gang 2way with N-terminal		
	2000/6 USK-500	2CKA001022A0659	10/100
	DP, 1gang 1way		
	2000/2 UK	2CKA001022A0656	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Rocker Switch Mechanism, control [1] [2] [3]
Switch-off and two-way circuit with N-clamp 16 A



With neon lamp.
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 20. IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2400/6 USK-500	2CKA001022A0661	10

[1] With 1 mA neon lamp.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[3] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-500	2CKA001413A0574	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1]
SP, with normally open contact (operating current)



With 2 independent signalling contacts.
Rated voltage: 250 V~
Inputs: 1
Outputs: 1
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-201	2CKA001413A0483	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1] [2] [3]
SP, with normally open contact (operating current)

With illumination.
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 USGL-500	2CKA001413A1106	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Replacement lamps 8360, 8362, and 8363 and LED inserts.
[3] For relay and touch dimmer applications.

Push-switch mechanism [1]

With one input terminal and 2 actuating covers.
Rated voltage: 250 V~
Inputs: 1
Outputs: 2x Normally open contact
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-205-500	2CKA001413A1105	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Push-switch mechanism [1] SP, 1gang 2way



Can be wired for normally open contacts (stand-by current) or normally closed contacts (operating current).
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2020 US-206-500	2CKA001413A1104	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

future® linear

Rocker switches / push switches

Rocker

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1786-81-500**	2CKA001751A3079	10/100
ivory white	**1786-82-500**	2CKA001751A3083	10/100
aluminium silver [1])	**1786-83-500**	2CKA001751A3075	10/100
studio white	**1786-84-500**	2CKA001751A3074	10/100
studio white, matt [1])	**1786-884-500**	2CKA001751A3089	10/100
black matt [1])	**1786-885-500**	2CKA001751A3094	10/100
red RAL 3020	**1786-12-82**	2CKA001751A3145	10/100

[1]) Surface painted.

Rocker Series switch

For flush-mounted switch 2g 1w, 2g push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785-81**	2CKA001751A2930	10
ivory white	**1785-82**	2CKA001751A2744	10/100
aluminium silver [1])	**1785-83**	2CKA001751A2942	10/100
aluminium silver [1])	**1785-83-500**	2CKA001751A3092	10/100
studio white	**1785-84-500**	2CKA001751A3076	10/100
studio white, matt [1])	**1785-884**	2CKA001751A3024	10/100
black matt [1])	**1785-885**	2CKA001751A3038	10/100

[1]) Surface painted.

Rocker

As a cover for flush-mounted control 2gang switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785 K-81-500**	2CKA001751A3122	10
ivory white	**1785 K-82-500**	2CKA001751A3124	10
aluminium silver [1])	**1785 K-83-500**	2CKA001751A3126	10
studio white	**1785 K-84-500**	2CKA001751A3128	10
studio white, matt [1])	**1785 K-884-500**	2CKA001751A3135	10
black matt [1])	**1785 K-885-500**	2CKA001751A3137	10

[1]) Surface painted.

Rocker with small red spherical cap

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789-81**	2CKA001751A2928	10
ivory white	**1789-82**	2CKA001751A2813	10
aluminium silver [1])	**1789-83**	2CKA001751A2945	10/100
studio white	**1789-84-500**	2CKA001751A3091	10/100
studio white, matt [1])	**1789-884**	2CKA001751A3033	10
black matt [1])	**1789-885**	2CKA001751A3047	10

[1]) Surface painted.

Rocker with small transparent lens

As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 N-81**	2CKA001751A3147	10/100
ivory white	**1789 N-82**	2CKA001751A3148	10/100
aluminium silver [1])	**1789 N-83**	2CKA001751A3149	10/100
studio white	**1789 N-84-500**	2CKA001751A3151	10/100
studio white, matt [1])	**1789 N-884**	2CKA001751A3153	10/100
black matt [1])	**1789 N-885**	2CKA001751A3154	10/100

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Plug< icon.
As cover for flush-mounted switch 1g1w DP and 3pole with neon lens and marking "I O"
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 ST-81**	2CKA001751A3157	10/100
ivory white	**1789 ST-82**	2CKA001751A3158	10/100
aluminium silver [1])	**1789 ST-83**	2CKA001751A3159	10/100
studio white	**1789 ST-84-500**	2CKA001751A3161	10/100
studio white, matt [1])	**1789 ST-884**	2CKA001751A3163	10/100
black matt [1])	**1789 ST-885**	2CKA001751A3164	10/100

[1]) Surface painted.

future® linear

Rocker switches / push switches

Switch rocker with marking

With >Light< icon.
For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2520 LI-81**	2CKA001751A3186	10/100
ivory white	**2520 LI-82**	2CKA001751A3187	10/100
aluminium silver [1])	**2520 LI-83**	2CKA001751A3188	10/100
studio white	**2520 LI-84-500**	2CKA001751A3190	10/100
studio white, matt [1])	**2520 LI-884**	2CKA001751A3192	10/100
black matt [1])	**2520 LI-885**	2CKA001751A3193	10/100

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Light< icon.
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 LI-81**	2CKA001751A2931	10
ivory white	**1789 LI-82**	2CKA001751A2745	10
aluminium silver [1])	**1789 LI-83**	2CKA001751A2951	10
studio white	**1789 LI-84-500**	2CKA001751A3084	10/100
studio white, matt [1])	**1789 LI-884**	2CKA001751A3031	10
black matt [1])	**1789 LI-885**	2CKA001751A3045	10

[1]) Surface painted.

Switch rocker with marking

With >Key< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2520 TR-81**	2CKA001751A3196	10/100
ivory white	**2520 TR-82**	2CKA001751A3197	10/100
aluminium silver [1])	**2520 TR-83**	2CKA001751A3198	10/100
studio white	**2520 TR-84**	2CKA001751A3199	10/100
studio white, matt [1])	**2520 TR-884**	2CKA001751A3201	10/100
black matt [1])	**2520 TR-885**	2CKA001751A3202	10/100

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Key< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 TR-81**	2CKA001751A2933	10
ivory white	**1789 TR-82**	2CKA001751A2747	10
aluminium silver [1])	**1789 TR-83**	2CKA001751A2953	10
studio white	**1789 TR-84**	2CKA001751A2755	10
studio white, matt [1])	**1789 TR-884**	2CKA001751A3032	10
black matt [1])	**1789 TR-885**	2CKA001751A3046	10

[1]) Surface painted.

Switch rocker with marking

With >Bell< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2520 KI-81**	2CKA001751A3176	10/100
ivory white	**2520 KI-82**	2CKA001751A3177	10/100
aluminium silver [1])	**2520 KI-83**	2CKA001751A3178	10/100
studio white	**2520 KI-84-500**	2CKA001751A3180	10/100
studio white, matt [1])	**2520 KI-884**	2CKA001751A3182	10/100
black matt [1])	**2520 KI-885**	2CKA001751A3183	10/100

[1]) Surface painted.

Switch rocker with marking with small transparent lens

With >Bell< icon.
For flush-mounted push switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 KI-81**	2CKA001751A2932	10
ivory white	**1789 KI-82**	2CKA001751A2746	10
aluminium silver [1])	**1789 KI-83**	2CKA001751A2952	10
studio white	**1789 KI-84**	2CKA001751A2754	10
studio white, matt [1])	**1789 KI-884**	2CKA001751A3030	10
black matt [1])	**1789 KI-885**	2CKA001751A3044	10

[1]) Surface painted.

future® linear

Rocker switches / push switches

Rocker [1] [2] with labelling field

With >Bell< icon.
With pilot lamp for uniform illumination of the labelling field.
For flush-mounted push switch.
Size of labelling field: 59.7 x 11.7 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1764 NLI/KI-81**	2CKA001731A3998	10/100
ivory white	**1764 NLI/KI-82**	2CKA001731A3999	10/100
aluminium silver [3]	**1764 NLI/KI-83**	2CKA001731A4000	10/100
studio white	**1764 NLI/KI-84-500**	2CKA001731A4002	10/100
studio white, matt [3]	**1764 NLI/KI-884**	2CKA001731A4004	10/100
black matt [3]	**1764 NLI/KI-885**	2CKA001731A4005	10/100

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Illumination using neon lamp 8353 or incandescent lamp 8344-1 and LED inserts.
[3] Surface painted.

Rocker [1] [2] with labelling field

With pilot lamp for uniform illumination of the labelling field.
For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
Size of labelling field: 59.7 x 11.7 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1764 NLI-81**	2CKA001731A1552	10
ivory white	**1764 NLI-82**	2CKA001731A1876	10
aluminium silver [3]	**1764 NLI-83**	2CKA001731A1948	10
studio white	**1764 NLI-84**	2CKA001731A1877	10/100
studio white, matt [3]	**1764 NLI-884**	2CKA001731A1985	10
black matt [3]	**1764 NLI-885**	2CKA001731A1982	10
red RAL 3020	**1764 NLI-12-82-101**	2CKA001731A4011	10
Green, RAL 6032	**1764 NLI-13-82**	2CKA001731A4007	10/100

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Illumination using neon lamp 8353 or incandescent lamp 8344-1 and LED inserts.
[3] Surface painted.

Switch rocker with marking with small red spherical cap

With imprint >0< and >I<.
As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1788-81**	2CKA001751A2927	10
ivory white	**1788-82**	2CKA001751A2742	10
aluminium silver [1]	**1788-83**	2CKA001751A2954	10
studio white	**1788-84**	2CKA001751A2750	10/100
studio white, matt [1]	**1788-884**	2CKA001751A3028	10
black matt [1]	**1788-885**	2CKA001751A3042	10

[1] Surface painted.

Switch rocker with marking with small red spherical cap

With >Heating< imprint.
As cover for flush-mounted 1gang 1way, 1gang 2way switch, intermediate switch, push-button and control switch 1gang 2way.
As cover for 2-pole or 3-pole flush-mounted on-off switch and 2-pole control on-off switch.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1789 H-81**	2CKA001751A2929	10
ivory white	**1789 H-82**	2CKA001751A2743	10
aluminium silver [1]	**1789 H-83**	2CKA001751A2955	10
studio white	**1789 H-84**	2CKA001751A2751	10
studio white, matt [1]	**1789 H-884**	2CKA001751A3029	10
black matt [1]	**1789 H-885**	2CKA001751A3043	10

[1] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker el. push-switch.

Colour	Type	Order code	Pack/Qty.
anthracite	**2570-10-81**	2CKA001751A3261	10
ivory white	**2570-10-82**	2CKA001751A3263	10
aluminium silver [1]	**2570-10-83**	2CKA001751A3259	10
studio white	**2570-10-84**	2CKA001751A3258	10
studio white, matt [1]	**2570-10-884**	2CKA001751A3260	10
black matt [1]	**2570-10-885**	2CKA001751A3262	10

[1] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker 2g el. push-switch.

Colour	Type	Order code	Pack/Qty.
anthracite	**2570-20-81**	2CKA001751A3272	10
ivory white	**2570-20-82**	2CKA001751A3274	10
aluminium silver [1]	**2570-20-83**	2CKA001751A3270	10
studio white	**2570-20-84**	2CKA001751A3269	10
studio white, matt [1]	**2570-20-884**	2CKA001751A3271	10
black matt [1]	**2570-20-885**	2CKA001751A3273	10

[1] Surface painted.

future® linear

Rocker switches / push switches

CoverPlates (partly incl. Insert) Hotel application

Rocker 3g el. push-switch.

Colour	Type	Order code	Pack/Qty.
anthracite	**2570-30-81**	2CKA001751A3283	10
ivory white	**2570-30-82**	2CKA001751A3285	10
aluminium silver [1])	**2570-30-83**	2CKA001751A3281	10
studio white	**2570-30-84**	2CKA001751A3280	10
studio white, matt [1])	**2570-30-884**	2CKA001751A3282	10
black matt [1])	**2570-30-885**	2CKA001751A3284	10

[1]) Surface painted.

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

El. push-switch insert.

Colour	Type	Order code	Pack/Qty.
	2051 U	2CKA001413A1115	10

Flush Mounted Inserts Black

El. push-switch insert 2g.

Colour	Type	Order code	Pack/Qty.
	2052 U	2CKA001413A1116	10

Flush Mounted Inserts Black

El. push-switch ins. 3g.

	2053 U	2CKA001413A1117	10

Cover plate

For card switch.
For insert 2025 U.
Suitable for cards sized 54 x 86 mm.
The inner part of the cover plate is made of light-conducting plastic, so that the card slot is illuminated.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1792-81**	2CKA001710A3639	10
ivory white	**1792-82**	2CKA001710A3640	10
aluminium silver [1])	**1792-83**	2CKA001710A3670	10
studio white	**1720-84**	2CKA001731A1916	10
studio white, matt [1])	**1792-884**	2CKA001710A3928	10
black matt [1])	**1792-885**	2CKA001710A3905	10

[1]) Surface painted.

Card switch 10 A [1])
SP, with normally open contact (operating current)



Illuminable.
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2025 U	2CKA001012A1713	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
delivery form:	Adapter plate APBS to be ordered separate.		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

CoverPlates (partly incl. Insert) Hotel application

C-plate, card switch RFID.

Colour	Type	Order code	Pack/Qty.
anthracite	**1792 RFID-81**	2CKA001710A4130	10
ivory white	**1792 RFID-82**	2CKA001710A4132	10
aluminium silver [1])	**1792 RFID-83**	2CKA001710A4128	10
studio white	**1792 RFID-84**	2CKA001710A4127	10
studio white, matt [1])	**1792 RFID-884**	2CKA001710A4129	10
black matt [1])	**1792 RFID-885**	2CKA001710A4131	10

[1]) Surface painted.

future® linear

Rocker switches / push switches

Flush Mounted Inserts Flush-mounted installation boxes and inserts Black

Card switch insert RFID.

Colour	Type	Order code	Pack/Qty.
	2025 RFID U	2CKA001012A2242	10

Switch rocker with marking

For flush-mounted switch 1g1w, 1g2w, intermediate, push switch.
DO NOT DISTURB
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1786/11-81**	2CKA001751A3207	10
ivory white	**1786/11-82**	2CKA001751A2997	10
aluminium silver [1])	**1786/11-83**	2CKA001751A3001	10
studio white	**1786/11-84**	2CKA001751A2998	10
studio white, matt [1])	**1786/11-884**	2CKA001751A3026	10
black matt [1])	**1786/11-885**	2CKA001751A3040	10

[1]) Surface painted.

Switch rocker with marking

For flush-mounted switch 2g 1w, 2g push switch.
DO NOT DISTURB
MAKE UP ROOM
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785/11-81**	2CKA001751A3205	10
ivory white	**1785/11-82**	2CKA001751A2991	10
aluminium silver [1])	**1785/11-83**	2CKA001751A2995	10
studio white	**1785/11-84**	2CKA001751A2992	10
studio white, matt [1])	**1785/11-884**	2CKA001751A3023	10
black matt [1])	**1785/11-885**	2CKA001751A3037	10

[1]) Surface painted.

Switch rocker with marking

As cover for flush-mounted rocker control switch insert, DND/MUR.
DO NOT DISTURB
MAKE UP ROOM
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785/11 K-81**	2CKA001751A3212	10
ivory white	**1785/11 K-82**	2CKA001751A3214	10
aluminium silver [1])	**1785/11 K-83**	2CKA001751A3210	10
studio white	**1785/11 K-84**	2CKA001751A3209	10
studio white, matt [1])	**1785/11 K-884**	2CKA001751A3211	10
black matt [1])	**1785/11 K-885**	2CKA001751A3213	10

[1]) Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Rocker DND/MUR electronic.

Colour	Type	Order code	Pack/Qty.
studio white	**2058-24-84**	2CKA001751A3220	10
aluminium silver [1])	**2058-24-83**	2CKA001751A3221	10
studio white, matt [1])	**2058-24-884**	2CKA001751A3222	10
anthracite	**2058-24-81**	2CKA001751A3223	10
black matt [1])	**2058-24-885**	2CKA001751A3224	10
ivory white	**2058-24-82**	2CKA001751A3225	10

[1]) Surface painted.

Rocker switch insert DND/MUR [1])



With LED.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028 UK	2CKA001012A2240	10/100

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

future® linear

Rocker switches / push switches

Rocker switch insert DND/MUR [1]



With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
	2028/12 UK	2CKA001012A2241	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Flush Mounted Inserts

El. push-switch DND/MUR.

Colour	Type	Order code	Pack/Qty.
	2058 UK	2CKA001413A1114	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Bell push-switch DND/MUR 230 V [1]

With LED.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
anthracite	**2029 UC-81**	2CKA001751A3167	1
ivory white	**2029 UC-82**	2CKA001751A3168	1
aluminium silver [2]	**2029 UC-83**	2CKA001751A3169	1
studio white	**2029 UC-84**	2CKA001751A3170	1
studio white, matt [2]	**2029 UC-884**	2CKA001751A3172	1
black matt [2]	**2029 UC-885**	2CKA001751A3173	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Surface painted.

Bell push-switch DND/MUR 24 V [1]

With LED.
Rated voltage: 24 V
Rated current: 6 A
Protection class (Device): IP 20
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
anthracite	**2029/12 UC-81**		1
ivory	**2029/12 UC-82**	2CKA001751A3236	1
aluminium silver [2]	**2029/12 UC-83**	2CKA001751A3232	1
studio white	**2029/12 UC-84**	2CKA001751A3231	1
studio white, matt [2]	**2029/12 UC-884**	2CKA001751A3233	1
black matt [2]	**2029/12 UC-885**	2CKA001751A3235	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Surface painted.

CoverPlates (partly incl. Insert) Hotel application

Bell push-switch DND/MUR.

Colour	Type	Order code	Pack/Qty.
studio white	**2059 UC-84**	2CKA001751A3240	1
aluminium silver [1]	**2059 UC-83**	2CKA001751A3241	1
studio white, matt [1]	**2059 UC-884**	2CKA001751A3242	1
anthracite	**2059 UC-81**	2CKA001751A3243	1
black matt [1]	**2059 UC-885**	2CKA001751A3244	1
ivory white	**2059 UC-82**	2CKA001751A3245	1

[1] Surface painted.

Pull switch [1]
SP, with normally open contact (operating current)

With 2-metre pull cord, red handle, and red neon indicator.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	2020/01 US-101	2CKA001413A1112	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

future® linear

Rocker switches / push switches

Pull switch [1]) SP, break contact

With 2-metre pull cord, red handle, and red neon indicator.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	2020/10 US-101	2CKA001413A1111	10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate [1]) for pull switch 2610/6 UC-xx, 2610/6 UJ-xx

With screw-type terminal
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1796-81**	2CKA001753A0308	10
ivory white	**1796-82**	2CKA001753A0309	10
aluminium silver [2])	**1796-83**	2CKA001753A0310	10
studio white	**1796-84**	2CKA001753A0311	10
studio white, matt [2])	**1796-884**	2CKA001753A0313	10
black matt [2])	**1796-885**	2CKA001753A0314	10

[1]) Exchanging the available cover/cover plate.
[2]) Surface painted.

Rocker open for red pull switch neon indicator

For pull switch 2020/xx US.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1720-81**	2CKA001731A1914	10
ivory white	**1720-82**	2CKA001731A1915	10
aluminium silver [1])	**1720-83**	2CKA001731A1949	10
studio white	**1720-84**	2CKA001731A1916	10
studio white, matt [1])	**1720-884**	2CKA001731A1979	10
black matt [1])	**1720-885**	2CKA001731A1981	10

[1]) Surface painted.

Three-step rotary switch [1]) [2]) SP, with zero position

With zero position.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710 U	2CKA001101A0918	1/10

[1]) Install only in conjunction with wall boxes ø 60 mm.
[2]) Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Three-step rotary switch [1]) [2]) SP, without zero position

Without zero position.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2710/1 U	2CKA001101A0919	1/10

[1]) Install only in conjunction with wall boxes ø 60 mm.
[2]) Not to be mounted in SM box 1701-xxx, 1702-xxx, 1703-xxx.

Cover plate with rotary control, with marking

As cover for flush mounted three-step rotary switch.
With zero position.
For insert 2710 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2542 DR/01-81**	2CKA001710A3644	10
ivory white	**2542 DR/01-82**	2CKA001710A3645	10
aluminium silver [1])	**2542 DR/01-83**	2CKA001710A3671	10
studio white	**2542 DR/01-84**	2CKA001710A3646	10
studio white, matt [1])	**2542 DR/01-884**	2CKA001710A3890	10
black matt [1])	**2542 DR/01-885**	2CKA001710A3913	10

[1]) Surface painted.

future® linear

Rocker switches / push switches

Cover plate with rotary control, with marking

As cover for flush mounted three-step rotary switch.
Without zero position.
For insert 2710/1 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2542 DR/02-81**	2CKA001710A3649	10
ivory white	**2542 DR/02-82**	2CKA001710A3650	10
aluminium silver [1])	**2542 DR/02-83**	2CKA001710A3672	10
studio white	**2542 DR/02-84**	2CKA001710A3651	10
studio white, matt [1])	**2542 DR/02-884**	2CKA001710A3891	10
black matt [1])	**2542 DR/02-885**	2CKA001710A3914	10

[1]) Surface painted.

Comprising Friends of Hue smart switch insert

Comprising 2gang rocker 6736 FoH-8xx for Friends of Hue smart switch. Consisting of 1gang future® linear cover frames. Comprising fixing plate and intermediate ring. Smarter light switches for wireless remote control of Philips Hue lamps For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<.
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology.

Colour	Type	Order code	Pack/Qty.
studio white	**6716 UJ-84-500**	2CKA006710A0011	1
black matt [1])	**6716 UJ-885-500**	2CKA006710A0018	1

[1]) Surface painted.

Friends of Hue smart switch insert
Wall-mounted transmitter, 2 / 4 channel

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx. Smarter light switches for wireless remote control of Philips Hue lamps. For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology.
Combinable with the Busch-Jaeger switch ranges: carat®,carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
	6716 U-500	2CKA006710A0014	1

Bluetooth Low Energy (BLE) smart switch complete set. Wall transmitter, 2/4 channels

Consisting of BLE smart switch insert 6716 UBT, 2gang rocker 6736 FoH-8xx for smart switches, 1gang future® linear cover frame, fixing plate and intermediate ring. Smarter light switch for wireless remote control of BLE radio devices. Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
studio white	**6716/01 UJ-84-500**	2CKA006730A0156	1
black matt [1])	**6716/01 UJ-885-500**	2CKA006730A0157	1

[1]) Surface painted.

Bluetooth Low Energy (BLE) smart switch semi complete set. Wall transmitter, 2/4 channels.

Consisting of BLE smart switch insert 6716 UBT, 2gang rocker 6736 FoH-8xx for smart switches, fixing plate and intermediate ring.
Smarter light switch for wireless remote control of BLE radio devices.
Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, future® linear and Impressivo.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
studio white	**6716/01 UJ-84-510**	2CKA006730A0158	1
black matt [1])	**6716/01 UJ-885-510**	2CKA006730A0159	1

[1]) Surface painted.

future® linear

Rocker switches / push switches

Bluetooth Low Energy (BLE) smart switch insert. Wall transmitter, 2 / 4 channel

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx.
- Smart switch for wireless remote control of radio components.
- Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Depending on the ecosystem, the wireless range is automatically extended via mains-powered BT mesh devices (repeater function).
- Encrypted transmission with AES-128 (CBC mode) and sequence counter.
- Contains NFC configuration interface according to NFC Forum Type 2 Tag (ISO/IEC 14443 Part 2 + 3).
- Therefore particularly simple commissioning of BLE radio components from Casambi.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
BT smart switch insert (SF)	**6716 UBT**	2CKA006710A0015	1

Smart Switch, WL NEW

Smarter light-/blind switch for wireless control of Busch-flexTronics® wireless and Busch-free@home® devices. Wall-mounted transmitter, 2/4 channels.
Operation in ABB-flexTronics® wireless with up to 32 devices (room control). Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required. Programming with the ABB-free@home® Next App. Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.
Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.

Colour	Type	Order code	Pack/Qty.
	62721 U-WL-500	2CKA006710A0048	1

1gang rocker for Friends of Hue and Bluetooth (Casambi)

Smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
anthracite	**6735 BT-81**	2CKA006730A0142	1
ivory white	**6735 BT-82**	2CKA006730A0143	1
aluminium silver [1])	**6735 BT-83**	2CKA006730A0144	1
studio white	**6735 BT-84**	2CKA006730A0145	1
studio white, matt [1])	**6735 BT-884**	2CKA006730A0149	1
black matt [1])	**6735 BT-885**	2CKA006730A0150	1

[1]) Surface painted.

Rocker

2gang rocker for Friends of Hue and Bluetooth (Casambi) smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
anthracite	**6736 FoH-81**	2CKA006730A0133	1
ivory white	**6736 FoH-82**	2CKA006730A0134	1
aluminium silver [1])	**6736 FoH-83**	2CKA006730A0135	1
studio white	**6736 FoH-84**	2CKA006730A0136	1
studio white, matt [1])	**6736 FoH-884**	2CKA006730A0140	1
black matt [1])	**6736 FoH-885**	2CKA006730A0141	1

[1]) Surface painted.

Rocker 1gang, with "Blind" icon NEW

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Colour	Type	Order code	Pack/Qty.
81 anthracite	**6735-11-81**	2CKA006220A0985	1
82 ivory white	**6735-11-82**	2CKA006220A0986	1
83 aluminium silver [1])	**6735-11-83**	2CKA006220A0987	1
84 studio white	**6735-11-84**	2CKA006220A0988	1
884 studio white matt [1])	**6735-11-884**	2CKA006220A0991	1
885 black matt [1])	**6735-11-885**	2CKA006220A0992	1

[1]) Surface painted.

future® linear
Dimmers

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
Flush-mounted, LED, 2-100 W

With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
Via mode switch adjustable between leading edge control and trailing edge control.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With adjustable minimum brightness.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10%
Rated frequency: 50 Hz/60 Hz
Nominal power: 2 - 100 W/VA (retrofit LED loads).
Nominal power: 10 - 250 W/VA (non-LED loads).
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6523 U-102-500	2CKA006512A0335	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
UP, LED, 2-400 W

Very small installation depth: < 20 mm.
With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without cover plate. Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz Nominal power: 2 - 100 W/VA (leading edge control) Nominal power: 2 - 400 W/VA (trailing edge control)

Colour	Type	Order code	Pack/Qty.
	6523 UR-104-500	2CKA006512A0354	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

future® linear
Dimmers

Busch-rotary dimmer [1] [2] [3] [4] flush mounted, 1-10V

With rotary control.
For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control gears
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 700 W/VA
IEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	2112 U-101-500	2CKA006599A2873	1/10

[1] Non-illuminable.
[2] Use cover plates 2115 J-.../2115-.../6540-... .
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Making-current limiters have to be provided in case of too high making currents.

Busch-rotary dimmer [1]
Flush-mounted, DALI, tunable white

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE article no. 2116/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116 U	2CKA006599A3025	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1] Flush-mounted, DALI, with internal power supply, tunable white

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor. For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K. With electronic short-circuit protection.
With electronic overload protection. Brightness power-on level and backround brightness level adjustable, buffered. With integrated LED illumination for orientation. Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116/11 U	2CKA006599A3026	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

future® linear
Dimmers

Busch-rotary dimmer [1]) flush mounted, DALI

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. Fool proved. Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
An additional DALI power supply is needed, e.g. by Tridonic, Philips, Helvar or 2117/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117 U-500	2CKA006599A2987	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1])
flush mounted, DALI, with internal power supply

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117/11 U-500	2CKA006599A2988	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

future® linear
Dimmers

Busch-rotary dimmer [1] [2] [3] LED, complete set

Consisting of Busch LED rotary dimmer 6523 U-102.
Consisting of the cover plate with rotary knob 6540-84-102.
Cover frame design future® linear 1721-184K.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
studio white	**6523 UJ-84-102**	2CKA006512A0350	1

[1] Recommendation: Please use loads and types of one producer.
[2] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[3] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Cover plate [1] with rotary knob, with indication lamp

Elevated knob.
With transparent luminous ring.
For Busch-Dimmer®.
For inserts
2112 U-101/2247 U/2250 U/6513 U-102/6517 U-10x/ 6519 U/6520 U/6523 U(R)(10x) /6591 U-10x and 6592 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6540-81-102**	2CKA006599A2950	10
ivory white	**6540-82-102**	2CKA006599A2951	10/100
aluminium silver [2]	**6540-83-102**	2CKA006599A2952	10/100
studio white	**6540-84-102-500**	2CKA006599A3009	10/100
studio white, matt [2]	**6540-884-102**	2CKA006599A2961	10/100
black matt [2]	**6540-885-102**	2CKA006599A2966	10/100

[1] Replacement neon lamp, Art. No. 3855.
[2] Surface painted.

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6] FM, LED, 3-240 VA

2-wire connection (neutral conductor not required).
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory. Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi).
Rated voltage: 230 V~, +10 % / -10 %.
Rated frequency: 50 Hz.
Inputs: 1. Outputs: 1x dimming channel.
Suitable for: 230 V LEDi, typical (leading edge control).
Rated power: 3 - 100 VA.
Suitable for: 230 V LEDi, typical (trailing edge control).
Rated power: 3 - 240 W.
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm.
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

future® linear
Dimmers

CoverPlates (partly incl. Insert) Studio white

future® linear LED touch-dimmer insert with tapping control element, 2gang, wireless. Optimised for dimming of retrofit LED lamps (LEDi). Consisting of Flex touch dimmer insert, 64851 U. Consisting of rocker, 2gang left with >Dimmer< icon 6234-21-84. Consisting of future® linear cover frames, 1gang 1721-184K.

Colour	Type	Order code	Pack/Qty.
	62851 UJ-84-WL-500	2CKA006200A0295	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Control element, 1 gang flex

Tapping control element, 1gang.
Compatible with all free@home flex inserts.
For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang.
For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads.
Compatible with all free@home flex inserts.
Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point.
Timer with Astro function.
For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Flex control element, 2 gang flex

Tapping control element, 2gang.
For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx.
For saving and calling up 2 scenes via the right rocker.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Flex control element, 2 gang flex

Tapping control element, 2gang
For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads.
Compatible with all free@home flex inserts.
Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point.
Timer with Astro function.
For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx.
For saving and calling up 2 scenes via the right rocker.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Rocker 1gang, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRD-1-81	2CKA006220A0149	1
ivory white	SRD-1-82	2CKA006220A0520	1
aluminium silver	SRD-1-83	2CKA006220A0150	
studio white	SRD-1-84	2CKA006220A0151	1
studiowhite matt	SRD-1-884	2CKA006220A0605	1
black matt	SRD-1-885	2CKA006220A0622	1

future® linear
Movement detectors

Rocker 2gang left, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRD-2-L-81	2CKA006220A0164	1
ivory white	SRD-2-L-82	2CKA006220A0525	1
aluminium silver	SRD-2-L-83	2CKA006220A0165	1
studio white	SRD-2-L-84	2CKA006220A0166	1
studiowhite matt	SRD-2-L-884	2CKA006220A0610	1
black matt	SRD-2-L-885	2CKA006220A0627	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRS-2-R-81	2CKA006220A0173	1
ivory white	SRS-2-R-82	2CKA006220A0528	1
aluminium silver	SRS-2-R-83	2CKA006220A0174	1
studio white	SRS-2-R-84	2CKA006220A0175	1
studiowhite matt	SRS-2-R-884	2CKA006220A0613	1
black matt	SRS-2-R-885	2CKA006220A0630	1

Proximity switch

3 wire connection (neutral conductor required).
Relay insert with proximity sensor.
For contactless ON/OFF switching of electric loads, e.g. lights.
For switching incandescent lamps, 230 V tungsten halogen lamps, fluorescent lamps and low-voltage halogen lamps, that are actuated via transformers.
Switches when detecting an approach at < approx. 5 cm.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps, 230 V halogen lamps, fluorescent lamps and low-voltage halogen lamps, that are operated via transformers.
Rated current: 10 AX
Rated power: 2300 W/VA
Temperature range (Device): -25 °C to 55 °CBritish Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6406 U	2CKA006400A0034	1

Cover plate Proximity switch

For proximity switch 6406 U.

Colour	Type	Order code	Pack/Qty.
ivory white	**6476-82**	2CKA006470A0003	10
aluminium silver [1])	**6476-83**	2CKA006470A0008	10
studio white, matt [1])	**6476-884**	2CKA006470A0010	10
black matt [1])	**6476-885**	2CKA006470A0011	10

[1]) Surface painted.

future® linear
ABB flexTronics inserts

Relay insert flex, 1gang [1])

3 wire connection (neutral conductor required).
For switching lighting systems. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical. Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 2300 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Relay insert flex, 2gang [1])

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 2. Outputs: 2x Normally open contact, potential-bound. Suitable for: 230 V- LEDi, typical. Rated power: 300 VA. Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers. Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

e-contact insert flex, 1gang [1]) [2])

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1]) Use only dimmable high-voltage LEDs.
[2]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

future® linear
ABB flexTronics inserts

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6] FM, LED, 3-240 VA

2-wire connection (neutral conductor not required).
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control. With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover. For control element flex, 1gang, 64711. For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi).
Rated voltage: 230 V~, +10 % / -10 %.
Rated frequency: 50 Hz.
Inputs: 1.
Outputs: 1x dimming channel.
Suitable for: 230 V LEDi, typical (leading edge control).
Rated power: 3 - 100 VA.
Suitable for: 230 V LEDi, typical (trailing edge control).
Rated power: 3 - 240 W.
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA.Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm.
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Extension insert flex [1]

3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations.
For group control of flex inserts via extension unit communication.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with all flex inserts.
Rated voltage: 230 V~, +10 % / -10 %.
Rated frequency: 50 Hz.
Control/Signal outputs: 1, electronic output, potential-bound.
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm.
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

future® linear

ABB flexTronics comfort switch sensor

Busch-Comfort switch flex sensor [1) 2)]

Movement detector push-button switch combination.
For switching lighting systems that depend on brightness and movement.
With select lens, prevents detection of smaller animal.
Push switch function possible at all times.
With notice LED when manual operation is necessary.
Extension of the detection range by main unit/ extension unit combination.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off.
Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off.
Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off.
With continuous light/continuous Off function.
Adjusting elements on rear side.
Surveillance density: 9 sectors with 28 switching segments.
Switch off delay: 1 to 10 min., adjustable.
Compatible with all ABB flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
ForLED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Display elements: LED for status display.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 5 m, lateral: 3 m, at mounting height: 1.1 m.
Detection angle: 170°.
Brightness limit value: 5 Lux - daytime operation
Operation mounting height: 0.8 m - 1.2 m.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 63 mm x 63 mm x 28 mm.
Above the wall: 21 mm.

Colour	Type	Order code	Pack/Qty.
anthracite	**64765-81-500**	2CKA006800A2883	1
ivory white	**64765-82-500**	2CKA006800A2885	1
aluminium silver [3)]	**64765-83-500**	2CKA006800A2887	1
studio white	**64765-84-500**	2CKA006800A2889	1
studio white, matt [3)]	**64765-884-500**	2CKA006800A2893	1
black matt [3)]	**64765-885-500**	2CKA006800A2895	1

[1)] The range specifications refer only to an ambient temperature of 21°C.
[2)] Please order the respective flush-mounted insert separately.

Busch-Comfort switch flex [1) 2)]
Complete set with comfort switch sensor and relay insert

Ready-to-install movement detector push-button switch combination (set packaging). Consisting of Busch-Comfort switch flex sensor, 64765-84-500.
Consisting of relay insert flex, 1gang, 64811 U-500.
Consisting of future® linear cover frames, 1gang 1721-184K-500.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED for status display.
Rated voltage: 230 V~, +10 % / -10 %.
Rated frequency: 50 Hz. Power dissipation: 0,3 W.
Outputs: 1x normally open contact, potential-bound.
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA.
Suitable for: 230 V incandescent lamps / 230 V halogen lamps.
Rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA.
Rated current: 10 A.
Suitable for: Fluorescent lamps.
Rated output: 2300 VA
Rated current: 10 AX, cos ϕ0.9.
Detection range: frontal: 5 m, lateral: 3 m, at mounting height: 1.1 m.
Detection angle: 170°.
Brightness limit value: 5 Lux - daytime operation
Operation mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 85 mm x 85 mm x 46 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64765 UJ-84-500	2CKA006800A2914	

[1)] The range specifications refer only to an ambient temperature of 21°C.
[2)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

future® linear

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, basic sensor [1] [2] with select-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Compatible with all free@home flex inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 22 mm. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m. Detection angle: 180°. Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64761-81-500**	2CKA006800A2921	1
ivory white	**64761-82-500**	2CKA006800A2923	1
aluminium silver [3]	**64761-83-500**	2CKA006800A2925	1
studio white	**64761-84-500**	2CKA006800A2927	1
studio white, matt [3]	**64761-884-500**	2CKA006800A2931	1
black matt [3]	**64761-885-500**	2CKA006800A2933	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex [1] [2] Complete set with Basic sensor multi-lens and relay insert

Ready-to-install movement detector for flush-mounted installation (set packaged). Consisting of Busch-Watchdog 180 flex, basic sensor. Consisting of relay insert flex, 1gang, 64811 U-500. Consisting of future® linear cover frames, 1gang 1721-184K-500.
Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz.Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps.
Rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m. Detection angle: 180°.
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 48 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
studio white	**64761 UJ-84-500**	2CKA006800A2951	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-Watchdog 180 flex, comfort sensor [1] [2] with select-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With continuous light/continuous Off function. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 22 mm. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m. Detection angle: 180 °. Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64762-81-500**	2CKA006800A2958	1
ivory white	**64762-82-500**	2CKA006800A2960	1
aluminium silver [3]	**64762-83-500**	2CKA006800A2962	1
studio white	**64762-84-500**	2CKA006800A2964	1
studio white matt [3]	**64762-884-500**	2CKA006800A2968	1
black matt [3]	**64762-885-500**	2CKA006800A2970	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex [1] [2] Complete set with Comfort sensor select lens and relay insert

Ready-to-install movement detector for flush-mounted installation (set packaged). Consisting of Busch-Watchdog 180 flex comfort sensor with select lens. Consisting of relay insert flex, 1gang, 64811 U-500. Consisting of future® linear cover frames, 1gang 1721-184K-500. Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical. Rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 2300 W. Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA. Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m
Detection angle: 180 °. Brightness limit value: 5 Lux - 500 Lux Up to daytime operation.
Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 48 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
studio white	**64762 UJ-84-500**	2CKA006800A2988	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

future® linear

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with select-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. ./. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Works with free@home. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**62762-81-WL-500**	2CKA006200A0166	1
ivory white	**62762-82-WL-500**	2CKA006200A0168	1
aluminium silver [3]	**62762-83-WL-500**	2CKA006200A0170	1
studio white	**62762-84-WL-500**	2CKA006200A0172	1
studio white matt [3]	**62762-884-WL-500**	2CKA006200A0176	1
black matt [3]	**62762-885-WL-500**	2CKA006200A0178	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex wireless [1] [2] Complete set with Comfort sensor select lens and relay insert

Ready-to-install movement detector for flush-mounted installation (set packaged). Consisting of Busch-Watchdog 180 flex comfort sensor wireless with select lens 62762-84-WL-500. Consisting of relay insert flex, 1gang, 64811 U-500. Consisting of future® linear cover frames, 1gang 1721-184K-500. Rated voltage: 230 V~. Rated frequency: 50 Hz. Inputs: 1 Outputs: 1x Normally open contact, potential-bound Suitable for: 230 V- LEDi, typical, rated power: 300 VA. Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W. Suitable for: Low voltage halogen lamps that are operated via transformers, rated power: 2300 VA. Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m Detection angle: 180 °. Brightness limit value: 5 Lux - 500 Lux up to daytime operation. Mounting height: 0.8 m - 1.2 m. Temperature range (Device): -5 °C to 45 °C Dimensions: (L x W x D): 80 mm x 80 mm x 48 mm Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
studio white	**62762 UJ-84-WL-500**	2CKA006200A0195	1

1) The range specifications refer only to an ambient temperature of 21°C.
2) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete).

Busch-Watchdog 180 flex, comfort sensor [1] [2] with multi-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Additional activation/ deactivation option via push-button input on the flush-mounted insert. With continuous light/continuous Off function. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 31 mm. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Detection range: frontal: 8 m, lateral: 7 m, Mounting height: 1.1 m. Detection range 2: frontal: 8 m, lateral: 8 m, Mounting height: 2.2 m. Detection angle: 180 °. Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m alternative: 2.2 m. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 63 mm x 63 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**64764-81-500**	2CKA006800A2995	1
ivory white	**64764-82-500**	2CKA006800A2997	1
aluminium silver [3]	**64764-83-500**	2CKA006800A2999	1
studio white	**64764-84-500**	2CKA006800A3001	1
studio white matt [3]	**64764-884-500**	2CKA006800A3005	1
black matt [3]	**64764-885-500**	2CKA006800A3007	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex [1] [2] Complete set with Comfort sensor multi-lens and relay insert

Ready-to-install movement detector for flush-mounted installation (set packaged). Consisting of Busch-Watchdog 180 flex comfort sensor with multi-lens. Consisting of relay insert flex, 1gang, 64811 U-500. Consisting of future® linear cover frames, 1gang 1721-184K-500. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 1 Outputs: 1x Normally open contact, potential-bound Suitable for: 230 V- LEDi, typical. Rated power: 300 VA Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 2300 W. Suitable for: Low voltage halogen lamps that are operated via transformers. Rated power: 2300 VA. Detection range: frontal: 8 m, lateral: 7 m, Mounting height: 1.1 m. Detection range 2: frontal: 8 m, lateral: 8 m, Mounting height: 2.2 m. Detection angle: 180 °. Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m alternative: 2.2 m. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 80 mm x 80 mm x 57 mm. Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
studio white	**64764 UJ-84-500**	2CKA006800A3025	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

future® linear

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with multi-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode.Surveillance density: 54 sectors with 224 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**62764-81-WL-500**	2CKA006200A0234	1
ivory white	**62764-82-WL-500**	2CKA006200A0236	1
aluminium silver [3]	**62764-83-WL-500**	2CKA006200A0238	1
studio white	**62764-84-WL-500**	2CKA006200A0240	1
studio white matt [3]	**62764-884-WL-500**	2CKA006200A0244	1
black matt [3]	**62764-885-WL-500**	2CKA006200A0246	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex wireless [1] [2]Complete set with Comfort sensor multi-lens and relay insert

Ready-to-install movement detector for flush-mounted installation (set packaged).
Consisting of Busch-Watchdog 180 flex comfort sensor wireless with multi-lens 62764-84-WL-500.
Consisting of relay insert flex, 1gang, 64811 U-500.
Consisting of future® linear cover frames, 1gang 1721-184K-500.
Rated voltage: 230 V~
Rated frequency: 50 Hz.
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical, rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via transformers, rated power: 2300 VA.
Detection range: frontal: 8 m, lateral: 7 m, Mounting height: 1.1 m.
Detection range: frontal: 8 m, lateral: 8 m, Mounting height: 2.2 m.
Detection angle: 180 °.
Brightness limit value: 5 Lux - 500 Lux up to daytime operation.
Mounting height: 0.8 m - 1.2 m, alternative: 2.2 m.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 80 mm x 80 mm x 57 mm.
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
studio white	**62764 UJ-84-WL-500**	2CKA006200A0264	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete).

Key Switch Insert [1] [2] [3] breaking circuit, 1-pole

For profile semi-cylindrical lock. In switched-on and switched-off status the key can be pulled out in the central position, respectively. Delivered without cylindrical lock. Rated voltage: 250 V~
Rated current: 10 AX. Suitable for: LEDi / CFLi
Rated power: 100 W. Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2733 USL-101	2CKA001101A0914	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Use the cylindrical lock according to the enclosed drawing.
[3] See profile semi-cylindrical lock.

future® linear
Movement detectors

Blind switch insert [1] [2] SP, switch

With interlock.
Rated voltage: 250 V~
Rated current: 10 AX
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2000/4 US-500	2CKA001012A2197	10/100
	2020/4 US-500	2CKA001413A1103	10/100

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] These blind switches/push buttons safely prevent a switch-over of the running direction being carried out too quickly.

Blind switch insert [1] [2]

With rotary knob/switch and push switch.
Rated voltage: 250 V~
Rated current: 10 AX. Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC 60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2712 U	2CKA001101A0534	10
	SP, N, E		
	2713 U	2CKA001101A0542	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

future® linear
Blind control / timers

Blind switch insert [1] [2]

With rotary knob/push button.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [3]		
	2722 U	2CKA001101A0559	10
	SP, N, E		
	2723 U	2CKA001101A0567	10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Also suitable for controlling direct voltage drives.

Blind switch/push-switch [1] [2] [3] [4]

For profile semi-cylindrical lock/switch and push-switch.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20
IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2712 USL-101	2CKA001101A0872	10
	SP, N, E		
	2713 USL-101	2CKA001101A0880	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

Blind switch insert [1] [2] [3] [4]

For profile semi-cylindrical lock/push-button.
Delivered without cylindrical lock.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 20
British Standard EN 60669-1, IEC60669-1

Colour	Type	Order code	Pack/Qty.
	DP [5]		
	2722 USL-101	2CKA001101A0898	10
	SP, N, E		
	2723 USL-101	2CKA001101A0906	10

[1] For installation on British Standard wallboxes please use adapter plate APBS (6599-0-2813). (Depth of box 60 mm.)
[2] Blind switches/push switches prevents fast change over between operating directions.
[3] Use the cylindrical lock according to the enclosed drawing.
[4] See semi-cylindrical lock.
[5] Also suitable for controlling direct voltage drives.

future® linear
Blind control / timers

DIN profile-semi cylindrical lock

Acc. to German Standard DIN 18252.
Total length 40 mm
for blind switches and push switches
For inserts 2712/2713/2722/2723/2733 USL-101 and 2712/2733 SLW-5x.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	different lock mechanism, with 3 keys		
	0520 PZ-VS	2CKA000470A0013	1/100
	lock mechanism, with 3 keys		
	0521 PZ-GS	2CKA000470A0021	1/100

Blind compact timer

Suitable for blind and roller blind drives with mechanical or electronic limit switch shut-off.
Without extension unit input.
Running time: 3 min
N-busbar connection is required.
For manual and time-controlled switching of blinds and roller blinds.
Memory function for the simple storage of switching times.
The controlled devices can be manually operated at any time.
Simple setting via display with with segment display and background illumination.
Factory pre-set switching times, individual adaptations are possible.
2 switching times per day can be freely adjusted for each day of the week.
Automatic switchover from summer time to winter time (switch-off function).
Switching times and programs are safely stored in the event of a mains power failure.
Power reserve for time and date > 10 years.
Simple toggling between manual/automatic/vacation modes.
See the associated cover plates 6435-xx.
Programming possible only with control element attached and energized.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 2x Normally open contact
Rated current: 3 A, cos ϕ 0.5
Rated power: 690 VA
Temperature range (Device): 0 °C to 45 °C

Colour	Type	Order code	Pack/Qty.
	6422 U-500	2CKA006410A0410	1/10

Blind comfort timer, complete set

Consisting of Busch-Blind control II insert 6411 U-101.
Consisting of the comfort timer control element 6455-101.
Cover frame design future® linear 1721-184K.
Consisting of the future® linear cover plate for timer control element 6435-84.

Colour	Type	Order code	Pack/Qty.
studio white	**6411 UJ-84-101**	2CKA006410A0408	1

Blind compact timer, complete set

Suitable for blind and roller blind drives with mechanical or electronic limit switch shut-off.
Without extension unit input.
Consisting of blind compact timer 6422 U.
Consisting of the future® linear cover plate for timer control element 6435-84.
Consisting of future® linear cover frames, 1gang 1721-184K. Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 2x Normally open contact
Rated current: 3 A, cos ϕ 0.5. Rated power: 690 VA
Temperature range (Device): 0 °C to 45 °C

Colour	Type	Order code	Pack/Qty.
	6422 UJ-84	2CKA006410A0413	1

Brightness sensor

For insert 6411U/S-101.
With 2 m connecting cable.
Measuring range: 15-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6414-101	2CKA006410A0389	1/10

Sun sensor

For insert 6411U/S-101.
Measuring range: 5-50,000 lux.

Colour	Type	Order code	Pack/Qty.
	6482	2CKA006410A0203	1

future® linear
Blind control / timers

Busch-Short-time timer insert [1]) countdown timer

For time-programmed switching of electrical consumers. With control cover, without cover plate.
Minimum timer time: 1 second.
Maximum timer time: 9:59:59 hours.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 1x Normally open contact
Rated current: 10 A, cos ϕ 1. Rated power: 2300 VA
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6465 U-101-500	2CKA006410A0393	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
Cover frames:	1gang frame 1721 BS-2xG or Dual Box frame 1722 BSDB-2xG.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Rocker with marking

As cover for flush-mounted blind control switch/push switch.
For inserts 2000/4 and 2020/4 US.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1785 JA-81**	2CKA001751A2934	10
ivory white	**1785 JA-82**	2CKA001751A2748	10
aluminium silver [1])	**1785 JA-83**	2CKA001751A2944	10/100
studio white	**1785 JA-84-500**	2CKA001751A3088	10/100
studio white, matt [1])	**1785 JA-884**	2CKA001751A3022	10
black matt [1])	**1785 JA-885**	2CKA001751A3036	10

[1]) Surface painted.

Cover plate with rotary control, with marking

As cover for flush-mounted blind control switch/push switch.
For inserts 2712 U, 2713 U and 2722 U, 2723 U.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1740-81**	2CKA001710A3623	10
ivory white	**1740-82**	2CKA001710A3154	10
aluminium silver [1])	**1740-83**	2CKA001710A3661	10
studio white	**1740-84**	2CKA001710A3172	10/100
studio white, matt [1])	**1740-884**	2CKA001710A3872	10
black matt [1])	**1740-885**	2CKA001710A3894	10

[1]) Surface painted.

Cover plate [1]) with labelling field

With marking.
For half-cylindrical type switches and blind control switch/push-switch.
For inserts 2733 USL-101 and 2712 USL-101, 2713 USL-101, 2722 USL-101, 2723 USL-101.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1755 SL/PZ-81-101**	2CKA001710A3626	10
ivory white	**1755 SL/PZ-82-101**	2CKA001710A3157	10
aluminium silver [2])	**1755 SL/PZ-83-101**	2CKA001710A3662	10
studio white	**1755 SL/PZ-84-101**	2CKA001710A3175	10
studio white, matt [2])	**1755 SL/PZ-884-101**	2CKA001710A3925	10
black matt [2])	**1755 SL/PZ-885-101**	2CKA001710A3902	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Control element

For Busch-Blind control II insert 6411 U-101, 6411 U/S-101.
For basic blind insert 6418 U.
For Busch-Universal 2gang 1way insert 6402 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6430-81-102**	2CKA006430A0326	1/10
ivory white	**6430-82-102**	2CKA006430A0327	1/10
aluminium silver [1])	**6430-83-102**	2CKA006430A0328	1/10
studio white, matt [1])	**6430-884-102**	2CKA006430A0385	1/10
black matt [1])	**6430-885-102**	2CKA006430A0386	1/10

[1]) Surface painted.

Time switch mechanism 16 A [1]) [2]) DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 15 min. For time-programmed switching of electrical consumers. Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird. Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist. Rated voltage: 230 V~, +10 % / -10 %. Rated current: 16 A, cos ϕ 0.25
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1070 U	2CKA001043A0025	1/10

[1]) For screw-fixing only
[2]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

future® linear
Blind control / timers

Time switch mechanism 16 A [1] [2]
DP, break contact for staircases, exterior lighting, fans, etc.

Running time: 120 min For time-programmed switching of electrical consumers. Schaltkontakte (2-polig) schließen, wenn die Laufzeit eingestellt und gestartet wird. Schaltkontakte (2-polig) öffnen, wenn die eingestellte Zeit abgelaufen ist. Rated voltage: 230 V~, +10 % / -10 %. Rated current: 16 A, cos ϕ 0.25
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1071 U	2CKA001043A0124	1

[1] For screw-fixing only
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate

For short-time timer 6465 U-101.
For Busch-CO2 sensor 1091 U-500.
For blind compact timer 6422 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6435-81**	2CKA006430A0303	10
ivory white	**6435-82**	2CKA006430A0304	10
aluminium silver [1]	**6435-83**	2CKA006430A0305	10
studio white	**6435-84**	2CKA006430A0306	10
studio white, matt [1]	**6435-884**	2CKA006430A0388	10
black matt [1]	**6435-885**	2CKA006430A0389	10

[1] Surface painted.

Cover plate with rotary knob, with marking

For Busch-Timer insert 1070 U.
Running time: 15 min
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1770-81-103**	2CKA001753A0255	10
ivory white	**1770-82-103**	2CKA001753A0256	10
aluminium silver [1]	**1770-83-103**	2CKA001753A0257	10
studio white	**1770-84-103**	2CKA001753A0258	10
studio white matt [2]	**1770-884-103**	2CKA001753A0260	10
black matt [1]	**1770-885-103**	2CKA001753A0261	10

[1] Surface painted.
[2] Surface lacquered in aluminium.

Cover plate with rotary knob, with marking

For Busch-Timer insert 1071 U.
Running time: 120 min
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1771-81-103**	2CKA001753A0265	10
ivory white	**1771-82-103**	2CKA001753A0266	10
aluminium silver [1]	**1771-83-103**	2CKA001753A0267	10
studio white	**1771-84-103**	2CKA001753A0301	10
studio white matt [1]	**1771-884-103**	2CKA001753A0303	10
black matt [1]	**1771-885-103**	2CKA001753A0304	10

[1] Surface painted.

Blind flex, Set, WL

Blind insert with tapping control element, 2gang, wireless. For the manual and automatic control of roller blinds, blinds, awnings. Timer with Astro function. For saving and calling up scenes and groups via the right rocker. Remote operation via the Bluetooth and smartphone/tablet app. Consisting of flex blind insert, 64831 U-500. Consisting of control element flex, 2gang, wireless, 62721-WL-500. Consisting of rocker, 2gang left with >Blind< icon 6232-20-84-500. Consisting of rockers, 2gang right with >Scene< icon 6233-22-84-500. Cover frame design future® linear 1721-184K. Control element: Switch contacts top/bottom. Display elements: LED (switch-off function / brightness adjustable) for status display. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Temperature range (device): -5 °C - 45 °C. Storage temperature range: -20 °C - 70 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mm. Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete).

Colour	Type	Order code	Pack/Qty.
	62731/UJ-84-WL-500	2CKA006200A0285	1

future® linear

Blind control / timers

Blind insert, 1 gang, 2 way flex

3 wire connection (neutral conductor required). For the control of roller shutters, blind and awning motors with mechanical or electronic limit switch shut-off. Group formation via extension input possible. Operation also via conventional push buttons (2020 US non-illuminated/2021/6 UK) possible. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL.

Colour	Type	Order code	Pack/Qty.
	64831 U-500	2CKA006400A0096	1

Extension insert flex

3 wire connection (neutral conductor required). For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts.

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

2 gang (not 1 gang)

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

future® linear
Socket outlets

Weather Station

For recording and transmitting of brightness, temperature, wind speed and rain. Weather data can be linked with actuators to automatically control functions. Weather data can be visualized in the free@home web interface and the free@home app. Remote operation via the Bluetooth and smartphone/tablet app.

Colour	Type	Order code	Pack/Qty.
	WS-1-WL.1	2CKA006200A0297	1

Standard Inputs

WS-1/A1.1 Mast adapter weather station

Colour	Type	Order code	Pack/Qty.
	WS-1/A1.1	2CKA006200A0848	1

Rocker 1gang, with “Blind” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
antracite	SRB-1-81	2CKA006220A0143	1
ivory white	SRB-1-82	2CKA006220A0518	1
aluminium silver	SRB-1-83	2CKA006220A0144	1
studio white	SRB-1-84	2CKA006220A0145	1
studiowhite matt	SRB-1-884	2CKA006220A0603	1
black matt	SRB-1-885	2CKA006220A0620	1

Rocker 2gang left/right, “Blind” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRB-2-81	2CKA006220A0158	1
ivory white	SRB-2-82	2CKA006220A0523	1
aluminium silver	SRB-2-83	2CKA006220A0159	1
studio white	SRB-2-84	2CKA006220A0160	1
studiowhite matt	SRB-2-884	2CKA006220A0608	1
black matt	SRB-2-885	2CKA006220A0625	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
anthracite	SRS-2-R-81	2CKA006220A0173	1
ivory white	SRS-2-R-82	2CKA006220A0528	1
aluminium silver	SRS-2-R-83	2CKA006220A0174	1
studio white	SRS-2-R-84	2CKA006220A0175	1
studiowhite matt	SRS-2-R-884	2CKA006220A0613	1
black matt	SRS-2-R-885	2CKA006220A0630	

future® linear
Socket outlets

SCHUKO® socket outlet

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUC-81-500**	2CKA002011A6215	10/100
ivory white	**20 EUC-82-500**	2CKA002011A6214	10/100
aluminium silver [1])	**20 EUC-83-500**	2CKA002011A6213	10/100
studio white	**20 EUC-84-500**	2CKA002011A6207	10/100
studio white, matt	**20 EUC-884-500**	2CKA002011A6208	10
black matt [1])	**20 EUC-885-500**	2CKA002011A6211	10/100

[1]) Surface painted.

SCHUKO® socket outlet [1]) shuttered

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCKS-81**	2CKA002013A5265	10
ivory white	**20 EUCKS-82-500**	2CKA002013A5376	10/100
aluminium silver [2])	**20 EUCKS-83-500**	2CKA002013A5375	10/100
studio white	**20 EUCKS-84-500**	2CKA002013A5372	10/100
studio white, matt	**20 EUCKS-884-500**	2CKA002013A5373	10/100
black matt [2])	**20 EUCKS-885**	2CKA002013A5333	10/100

[1]) Increased shock protection .
[2]) Surface painted.

SCHUKO® socket outlet without claw [1]) shuttered

Without claws.
With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCRB-81**	2CKA002013A5437	10/100
ivory white	**20 EUCRB-82**	2CKA002013A5438	10/100
aluminium silver [2])	**20 EUCRB-83**	2CKA002013A5439	10/100
studio white	**20 EUCRB-84-500**	2CKA002013A5441	10/100
studio white, matt [2])	**20 EUCRB-884**	2CKA002013A5443	10
black matt [2])	**20 EUCRB-885**	2CKA002013A5444	10/100

[1]) Increased shock protection .
[2]) Surface painted.

SCHUKO® socket outlet [1]) [2]) shuttered

With screw-type terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2300 EUCB-81**	2CKA002013A5448	10
ivory white	**2300 EUCB-82**	2CKA002013A5449	10/100
aluminium silver [3])	**2300 EUCB-83**	2CKA002013A5450	10/100
studio white	**2300 EUCB-84**	2CKA002013A5451	10/100
studio white, matt [3])	**2300 EUCB-884**	2CKA002013A5453	10/100
black matt [3])	**2300 EUCB-885**	2CKA002013A5454	10/100

[1]) Increased shock protection .
[2]) With screw-type terminals
[3]) Surface painted.

SCHUKO® socket outlet [1]) [2]) shuttered

With screw-type terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**23 EUCB-81**	2CKA002013A5474	10
ivory white	**23 EUCB-82**	2CKA002013A5475	10
aluminium silver [3])	**23 EUCB-83**	2CKA002013A5476	10
studio white	**23 EUCB-84**	2CKA002013A5477	10/100
studio white, matt [3])	**23 EUCB-884**	2CKA002013A5479	10
black matt [3])	**23 EUCB-885**	2CKA002013A5480	10

[1]) Increased shock protection .
[2]) With screw-type terminal for rigid and flexible wires
[3]) Surface painted.

SCHUKO® socket outlet shuttered

DP (2 P + E)
With screwless terminals.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
red RAL 3020	**20 EUCKS-12-82-101**	2CKA002013A5464	10

future® linear
Socket outlets

SCHUKO® USB socket outlet, 2gang [1] [2] [3] [4] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the SCHUKO® socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCB2USBAC-81-500**	2CKA002011A6301	1/10
ivory white	**20 EUCB2USBAC-82-500**	2CKA002011A6303	1/10
aluminium silver [4]	**20 EUCB2USBAC-83-500**	2CKA002011A6305	1/10
studio white	**20 EUCB2USBAC-84-500**	2CKA002011A6307	1/10
studio white matt [4]	**20 EUCB2USBAC-884-500**	2CKA002011A6311	1/10
black matt [4]	**20 EUCB2USBAC-885-500**	2CKA002011A6313	1/10

[1] Increased shock protection .
[2] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[3] No data transfer.
[4] Surface painted.

Busch-Socket outlet [1] shuttered

With screwless terminals.
DP (2 P + E)
With eject mechanism.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCBDR-81**	2CKA002013A5415	10
ivory white	**20 EUCBDR-82**	2CKA002013A5416	10
aluminium silver [2]	**20 EUCBDR-83**	2CKA002013A5417	10
studio white	**20 EUCBDR-84**	2CKA002013A5418	10
studio white, matt [2]	**20 EUCBDR-884**	2CKA002013A5420	10
black matt [2]	**20 EUCBDR-885**	2CKA002013A5421	10

[1] Increased shock protection .
[2] Surface painted.

SCHUKO® socket outlet steplight® [1] With night orientation light

With separate connection cables for switch contact.
With LED. Shuttered.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCBLI-81**	2CKA002013A5459	1
ivory white	**20 EUCBLI-82**	2CKA002013A5292	1
aluminium silver [2]	**20 EUCBLI-83**	2CKA002013A5293	1
studio white	**20 EUCBLI-84**	2CKA002013A5294	1
studio white, matt [2]	**20 EUCBLI-884**	2CKA002013A5326	1
black matt [2]	**20 EUCBLI-885**	2CKA002013A5331	1

[1] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2] Surface painted.

SCHUKO® socket outlet [1] with labelling field

DP (2 P + E)
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUN-81**	2CKA002011A3802	10
ivory white	**20 EUN-82**	2CKA002011A3726	10
aluminium silver [2]	**20 EUN-83**	2CKA002011A3810	10
studio white	**20 EUN-84-500**	2CKA002011A6209	10/100
studio white, matt [2]	**20 EUN-884**	2CKA002011A3881	10
black matt [2]	**20 EUN-885**	2CKA002011A3884	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Surface painted.

SCHUKO® socket outlet [1] [2] with label field, increased shock protection

Size of labelling field: 60 x 9 mm.
With screwless terminals. DP (2 P + E).
Shuttered.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCNB-81**	2CKA002013A5427	10
ivory white	**20 EUCNB-82**	2CKA002013A5428	10
aluminium silver [3]	**20 EUCNB-83**	2CKA002013A5429	10/100
studio white	**20 EUCNB-84-500**	2CKA002013A5431	10/100
studio white, matt [3]	**20 EUCNB-884**	2CKA002013A5433	10/100
black matt [3]	**20 EUCNB-885**	2CKA002013A5434	10/100
red RAL 3020	**20 EUCNB-12-82**	2CKA002013A5423	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Increased shock protection .
[3] Surface painted.

future® linear
Socket outlets

SCHUKO® socket outlet [1]) with marking "EDV"

With screwless terminals.
DP (2 P + E)
Shuttered.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCKS/DV-81**	2CKA002013A5266	10
ivory white	**20 EUCKS/DV-82**	2CKA002013A5267	10
aluminium silver [2])	**20 EUCKS/DV-83**	2CKA002013A5273	10/100
studio white	**20 EUCKS/DV-84**	2CKA002013A5268	10
studio white, matt [2])	**20 EUCKS/DV-884**	2CKA002013A5327	10
black matt [2])	**20 EUCKS/DV-885**	2CKA002013A5332	10

[1]) Increased shock protection .
[2]) Surface painted.

SCHUKO® socket outlet shuttered

With imprint >EDP<.
With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
red RAL 3020	**20 EUCKS/DV-12-82-101**	2CKA002013A5463	10

Busch-Protector® SCHUKO® socket outlet [1]) with overvoltage protection

DP (2 P + E)
With integrated and external signalling contact.
ISN = 5 kA
Device protection for technical sensitive equipment such as computer, entertainment electronics and building management systems.
Effectively reduces overvoltage peaks occurring between the sub-distribution switch board and SCHUKO® socket outlet.
Arrestor test class: classification Type 2
Rated voltage: 250 V~
Secondary: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2310 EUGL/VA-81-11**	2CKA002011A3830	1
ivory white	**2310 EUGL/VA-82-11**	2CKA002011A3831	1
aluminium silver [2])	**2310 EUGL/VA-83-11**	2CKA002011A3832	1
studio white	**2310 EUGL/VA-84-11**	2CKA002011A3833	1
studio white, matt [2])	**2310EUGL/VA-884-11**	2CKA002011A3882	1
black matt [2])	**2310EUGL/VA-885-11**	2CKA002011A3885	1
red RAL 3020	**2310 EUGL/ VA-12-82-101**	2CKA002011A6257	1/10

[1]) Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2]) Surface painted.

SCHUKO® socket outlet with LED control light

Shuttered.
DP (2 P + E)
With transparent lens.
LED colour green.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCBL-81**	2CKA002013A5457	10
ivory white	**20 EUCBL-82**	2CKA002013A5284	10
aluminium silver [1])	**20 EUCBL-83**	2CKA002013A5285	10
studio white	**20 EUCBL-84**	2CKA002013A5286	10
studio white, matt [1])	**20 EUCBL-884**	2CKA002013A5336	10
black matt [1])	**20 EUCBL-885**	2CKA002013A5330	10
Green, RAL 6032	**20 EUCBL-13-84-101**	2CKA002013A5467	10
orange RAL 2004 [2])	**20 EUCBL-14-84**	2CKA002013A5288	10

[1]) Surface painted.
[2]) Resistant to aggressive media, e.g., ammonia, benzine, oils, greases, alcohol, and cleansing agents, in normal concentrations.

Busch-Object socket outlet [1]) shuttered

With screwless terminals.
DP (2 P + E)
Incl. Cover plate with extract mechanism.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUAB-81**	2CKA002013A5404	10
ivory white	**20 EUAB-82**	2CKA002013A5405	10
aluminium silver [2])	**20 EUAB-83**	2CKA002013A5406	10
studio white	**20 EUAB-84**	2CKA002013A5407	10
studio white, matt [2])	**20 EUAB-884**	2CKA002013A5409	10
black matt [2])	**20 EUAB-885**	2CKA002013A5410	10

[1]) Increased shock protection .
[2]) Surface painted.

future® linear
Socket outlets

FI-SCHUKOMAT, SCHUKO® socket outlet (RCD) [1] [2] [3] with earth leakage circuit breaker

Shuttered.
DP cut off (P,N)
Without PE monitoring.
With output terminals for connecting and protecting downsream SCHUKO® socket outlets.
Rated fault current: 30 mA.
With fixing claws.
Rated frequency: 45-60 Hz.
Rated voltage: 230 V~
Rated current: 16 A
Protection class (Device): IP 20
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
anthracite	**3120 EUCB-81**	2CKA003116A0667	1/10
ivory white	**3120 EUCB-82**	2CKA003116A0661	1
aluminium silver [4]	**3120 EUCB-83**	2CKA003116A0668	1/10
studio white	**3120 EUCB-84**	2CKA003116A0662	1
studio white, matt [4]	**3120 EUCB-884**	2CKA003116A0670	1/10
black matt [4]	**3120 EUCB-885**	2CKA003116A0671	1/10

[1] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[2] Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.
[3] Increased shock protection .
[4] Surface painted.

Buschmat® FI - Insert [1] with earth leakage breaker with connecting conductor

Protection of downstream consumers.
Rated fault current: 30 mA.
DP cut off (P,N)
Without claw fixation.
Rated frequency: 45-60 Hz.
Rated voltage: 230 V~
Rated current: 16 A
Protection class (Device): IP 20
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
anthracite	**3151 UC-81**	2CKA003117A0009	1/10
ivory white	**3151 UC-82**	2CKA003117A0005	1/10
aluminium silver [2]	**3151 UC-83**	2CKA003117A0010	1/10
studio white	**3151 UC-84**	2CKA003117A0006	1/10
studio white, matt [2]	**3151 UC-884**	2CKA003117A0012	1/10
black matt [2]	**3151 UC-885**	2CKA003117A0013	1/10

[1] Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.
[2] Surface painted.

SCHUKO® socket outlet with hinged lid

With screwless terminals.
DP (2 P + E)
Hinged lid notches when opened.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUK-81**	2CKA002018A1486	10
ivory white	**20 EUK-82**	2CKA002018A1465	10
aluminium silver [1]	**20 EUK-83**	2CKA002018A1487	10
studio white	**20 EUK-84-500**	2CKA002018A1509	10/100
studio white, matt [1]	**20 EUK-884**	2CKA002018A1494	10
black matt [1]	**20 EUK-885**	2CKA002018A1495	10

[1] Surface painted.

SCHUKO® socket outlet [1] with hinged lid and internal increased shock protection

Shuttered.
With screwless terminals.
DP (2 P + E)
with hinged lid
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKB-81**	2CKA002018A1517	10/100
ivory white	**20 EUKB-82**	2CKA002018A1518	10/100
aluminium silver [2]	**20 EUKB-83**	2CKA002018A1519	10/100
studio white	**20 EUKB-84**	2CKA002018A1520	10/100
studio white, matt [2]	**20 EUKB-884**	2CKA002018A1522	10/100
black matt [2]	**20 EUKB-885**	2CKA002018A1523	10/100
anthracite [3]	**20 EUKBR-81**	2CKA002018A1526	10/100
ivory [3]	**20 EUKBR-82**	2CKA002018A1527	10/100
aluminium silver [2] [3]	**20 EUKBR-83**	2CKA002018A1528	10/100
studio white [3]	**20 EUKBR-84**	2CKA002018A1529	10/100
studio white, matt [2] [3]	**20 EUKBR-884**	2CKA002018A1530	10/100
black matt [2] [3]	**20 EUKBR-885**	2CKA002018A1531	10/100

[1] Increased shock protection .
[2] Surface painted.
[3] Without claw.

future® linear
Socket outlets

SCHUKO® socket outlet [1]) with hinged lid and lock

Shuttered.
With screwless terminals.
DP (2 P + E)
With different lock mechanism.
Delivery includes 2 keys.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNBSL-81**	2CKA002018A1557	10
ivory white	**20 EUKNBSL-82**	2CKA002018A1559	10
aluminium silver [2])	**20 EUKNBSL-83**	2CKA002018A1561	10
studio white	**20 EUKNBSL-84**	2CKA002018A1563	10
studio white, matt [2])	**20 EUKNBSL-884**	2CKA002018A1565	10
black matt [2])	**20 EUKNBSL-885**	2CKA002018A1567	10

[1]) Increased shock protection .
[2]) Surface painted.

SCHUKO® socket outlet [1]) with hinged lid and lock

Shuttered.
With screwless terminals.
DP (2 P + E)
With evenly engaging lock.
Delivery includes 2 keys.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNBSL-81-101**	2CKA002018A1558	10
ivory white	**20 EUKNBSL-82-101**	2CKA002018A1560	10
aluminium silver [2])	**20 EUKNBSL-83-101**	2CKA002018A1562	10
studio white	**20 EUKNBSL-84-101**	2CKA002018A1564	10
studio white, matt [2])	**20 EUKNBSL-884-101**	2CKA002018A1566	10
black matt [2])	**20 EUKNBSL-885-101**	2CKA002018A1568	10

[1]) Increased shock protection .
[2]) Surface painted.

SCHUKO® socket outlet [1]) [2]) [3]) with hinged lid and labelling field

Shuttered.
With screwless terminals.
DP (2 P + E)
with hinged lid
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNB-81**	2CKA002018A1537	10/100
ivory white	**20 EUKNB-82**	2CKA002018A1538	10/100
red RAL 3020 [4])	**20 EUKNB-12-82**	2CKA002018A1533	10/100
Green, RAL 6032 [4])	**20 EUKNB-13-82**	2CKA002018A1534	10/100
orange RAL 2004 [4])	**20 EUKNB-14-82**	2CKA002018A1535	10/100
aluminium silver [5])	**20 EUKNB-83**	2CKA002018A1539	10/100
studio white	**20 EUKNB-84**	2CKA002018A1540	10/100
studio white, matt [5])	**20 EUKNB-884**	2CKA002018A1541	10/100
black matt [5])	**20 EUKNB-885**	2CKA002018A1542	10/100

[1]) Increased shock protection .
[2]) The labels are clamped under the labelling field.
[3]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4]) With continuous coloured marking of cover plate and base.
[5]) Surface painted.

SCHUKO® socket outlet [1]) [2]) [3]) with hinged lid, labelling field and LED control light

Shuttered.
With screwless terminals.
DP (2 P + E)
with hinged lid
Size of labelling field: 60 x 9 mm.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUKNBL-81**	2CKA002018A1548	10/100
ivory white	**20 EUKNBL-82**	2CKA002018A1549	10/100
red RAL 3020 [4])	**20 EUKNBL-12-82**	2CKA002018A1544	10/100
Green, RAL 6032 [4])	**20 EUKNBL-13-82**	2CKA002018A1545	10/100
orange RAL 2004 [4])	**20 EUKNBL-14-82**	2CKA002018A1546	10/100
aluminium silver [5])	**20 EUKNBL-83**	2CKA002018A1550	10/100
studio white	**20 EUKNBL-84**	2CKA002018A1551	10/100
studio white, matt [5])	**20 EUKNBL-884**	2CKA002018A1552	10/100
black matt [5])	**20 EUKNBL-885**	2CKA002018A1553	10/100

[1]) Increased shock protection .
[2]) The labels are clamped under the labelling field.
[3]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4]) With continuous coloured marking of cover plate and base.
[5]) Surface painted.

future® linear
Socket outlets

SCHUKO® socket outlet shuttered

DP (2 P + E)
With screwless terminals.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Green, RAL 6032	**20 EUCKS-13-82-101**	2CKA002013A5470	10
orange RAL 2004	**20 EUCKS-14-82**	2CKA002013A5324	10

SCHUKO® socket outlet [1]) with marking

Shuttered.
With screwless terminals. DP (2 P + E)
With continuous coloured marking of cover plate and base.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Green, RAL 6032 [2])	**20 EUCB-13-82-102**	2CKA002013A5472	10/100
orange RAL 2004 [3])	**20 EUCB-14-82-10**	2CKA002013A5413	10/100

[1]) Increased shock protection.
[2]) With imprint "PS"
[3]) With imprint "CPS"

SCHUKO® socket outlet with marking

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Green, RAL 6032	**20 EUC-13-82-101**	2CKA002011A6260	10
orange RAL 2004	**20 EUC-14-82**	2CKA002011A3723	10

SCHUKO® socket outlet [1]) [2]) with labelling field

Size of labelling field: 60 x 9 mm.
With screwless terminals.
DP (2 P + E)
Shuttered.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Green, RAL 6032	**20 EUCNB-13-82**	2CKA002013A5424	10
orange RAL 2004	**20 EUCNB-14-82**	2CKA002013A5425	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Increased shock protection.

SCHUKO® socket outlet shuttered

Without claws.
With screw-type terminals.
DP
Suitable for 1gang flush-mounted boxes.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
anthracite	**2300 UCRKS-81-503**	2CKA002113A5339	10
ivory white	**2300 UCRKS-82-503**	2CKA002113A0510	10
studio white	**2300 UCRKS-84-503**	2CKA002113A0511	10
studio white, matt [2])	**2300 UCRKS-884-503**	2CKA002113A5337	10
black matt [2])	**2300 UCRKS-885-503**	2CKA002113A5340	10

[1]) Increased shock protection .
[2]) Surface painted.

Shaver socket outlet

For installation into FM 2gang wall box 3030 and 3031.
Rated voltage: 240 V, +10 % / -10 %
Output voltage: 115 V, +10 % / -10 %
Secondary: 240 V, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 20 VA

Colour	Type	Order code	Pack/Qty.
anthracite	**2332 UJBS-81**	2CKA002130A0297	1
studio white	**2332 UJBS-84**	2CKA002130A0292	1
black matt [1])	**2332 UJBS-885**	2CKA002130A0295	1

[1]) Surface painted.

Flush-mounting wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 135 mm x 75 mm x 47 mm

Colour	Type	Order code	Pack/Qty.
	3030	2CKA001741A0067	4

Flush-mounting cavity wall box, 2gang

For shaver socket outlet 2332 UJBS-8xx.
Protection class (Device): IP 20
Dimensions: (L x W x D): 142 mm x 75 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
	3031	2CKA001741A0068	4

future® linear
Socket outlets

13 A Switched socket outlet

SP switched
1gang
Only for mounting in VDE flush-mounted wallboxes CFB 122 and CFBM 122.
Rated voltage: 250 V~
Rated current: 13 ABS 1363: part2

Colour	Type	Order code	Pack/Qty.
anthracite	**2190 EUC-81**	2CKA002190A0216	10/100
studio white	**2190 EUC-84**	2CKA002190A0215	10/100
black matt [1])	**2190 EUC-885**	2CKA002190A0219	10

[1]) Surface painted.

2gang European/American socket outlet, 10A

2gang
With screw-type terminals.
SP switched
Without claws.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2192-02 UC-81-500**		
	delivery on request		
ivory white	**2192-02 UC-82-500**		
	delivery on request		
aluminium silver [1])	**2192-02 UC-83-500**		
	delivery on request		
studio white	**2192-02 UC-84-500**		

[1]) Surface painted.

Socket outlet [1]) with earth pin

With screwless terminals.
Suitable for the countries: Belgium, Poland, Czech Republic.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	20 M-500	2CKA002017A0854	10/100

[1]) Insert can be used for all covers 2399 UCKS-xx.

Socket outlet cover frame shuttered

For socket outlet insert 20 M-500.
Rated voltage: 250 V~

Colour	Type	Order code	Pack/Qty.
anthracite	**2399 UCKS-81**	2CKA002099A0216	10
ivory	**2399 UCKS-82**	2CKA002099A0211	10
aluminium silver [1])	**2399 UCKS-83**	2CKA002099A0241	10/100
studio white	**2399 UCKS-84**	2CKA002099A0214	10
studio white, matt [1])	**2399 UCKS-884**	2CKA002099A0255	10
black matt [1])	**2399 UCKS-885**	2CKA002099A0256	10/100

[1]) Surface painted.

USB socket outlet earthing pin, 2gang [1]) [2]) [3]) shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the pin earth socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**20 MUCB2USBAC-81-500**	2CKA002017A1913	1
ivory white	**20 MUCB2USBAC-82-500**	2CKA002017A1914	1
aluminium silver [3])	**20 MUCB2USBAC-83-500**	2CKA002017A1915	1/10
studio white	**20 MUCB2USBAC-84-500**	2CKA002017A1916	1/10
studio white matt [3])	**20 MUCB2USBAC-884-500**	2CKA002017A1918	1/10
black matt [3])	**20 MUCB2USBAC-885-500**	2CKA002017A1919	1/10

[1]) Socket outlet with integrated child protection. Replaces the usual term"...with child protection".
[2]) No data transfer.
[3]) Surface painted.

future® linear
Socket outlets

Chinese socket outlet, 10 A

1gang
With screw-type terminals.
Without claws. According to Chinese standard: GB 2099.1 Rated voltage: 250 V~
Rated current: 10 A
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2193 EUC/10-81-500**		
	delivery on request		
ivory white	**2193 EUC/10-82-500**		
	delivery on request		
studio white	**2193 EUC/10-84-500**		

Chinese socket outlet, 16 A

1gang
With screw-type terminals. Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2193 EUC/16-81-500**		
	delivery on request		
ivory white	**2196 EUC/16-82-500**		
	delivery on request		
studio white	**2193 EUC/16-84-500**		

Chinese and Euro American socket outlet, 10 A

1gang
With screw-type terminals.
Without claws.
According to Chinese standard: GB 2099.1
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2195 EUC/10-81-500**		
	delivery on request		
ivory white	**2195 EUC/10-82-500**		
	delivery on request		
studio white	**2195 EUC/10-84-500**		

International socket outlet 13A [1])

1gang
With screw-type terminals.
Without claws.
Rated voltage: 250 V~
Rated current: 13 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2197 EUC-81-500**		
	delivery on request		
ivory white	**2197 EUC-82-500**		
	delivery on request		
studio white	**2197 EUC-84-500**		

[1]) Usage may be restricted in certain countries.

Euro American socket outlet with earth, 16 A

1gang
With screw-type terminals.
Without claws.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	delivery on request		
anthracite	**2196 EUC-81-500**		
	delivery on request		
ivory white	**2196 EUC-82-500**		
	delivery on request		
studio white	**2196 EUC-84-500**		

SCHUKO® socket outlet [1]) [2]) shuttered

With screw-type terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**23 EUCB-81**	2CKA002013A5474	10
ivory white	**23 EUCB-82**	2CKA002013A5475	10
aluminium silver [3])	**23 EUCB-83**	2CKA002013A5476	10
studio white	**23 EUCB-84**	2CKA002013A5477	10/100
studio white, matt [3])	**23 EUCB-884**	2CKA002013A5479	10
black matt [3])	**23 EUCB-885**	2CKA002013A5480	10

[1]) Increased shock protection .
[2]) With screw-type terminal for rigid and flexible wires
[3]) Surface painted.

future® linear
Data communication

Universal data connection unit, cat. 3 [1]) 1gang

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0213-500	2CKA000230A1549	10/100

[1]) Suitable for cover plate 1803-xxx.

Universal data connection box with down-leading outlet [1]) 2gang internally parallel connected

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0214	2CKA000230A0235	10/100
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Universal data connection box with down-leading outlet [1]) 2 x outlets, 8/8-pole

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0215	2CKA000230A0243	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 1gang

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without claws.
Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/11-101	2CKA000230A0409	1/10

[1]) Suitable for cover plate 1803-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 2 x outlets, 8/8-pole

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability. Flex cable entries from all sides without buckles. Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For trunk systems, flush-mounted wall boxes and underfloor systems. For wires of AWG 24-22.
Without claws. Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0218/12-101	2CKA000230A0411	1/10

[1]) Suitable for cover plate 1803-02-xxx.

future® linear
Data communication

Universal data connection box 8(6)/ telephone unit 6F+N - connection box [1]) 2 x 6-pole



With straight outlet, with screw contacts,
Universal data-connection boxes: RJ 11/12,
ISDN capable Cat. 3 in acc. with IEC 603-7/German Standard DIN EN 60603-7,
Telecommunication outlet (telephone unit): for 1 telephone, 1 auxiliary device or 1 data transmission unit,
With claw. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**UAE 8(6)TAE 6 F+N**	2CKA000230A0381	10/100

[1]) Suitable for cover plate 2539-xxx, 1766-xxx and 1746-2xx-FN.

Satellite co-axial outlets 2 connectors/dead-end feeder

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0230-101	2CKA000230A0250	10/100

Antenna socket insert Radio/TV 2 connectors/loop through type

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0231-101	2CKA000230A0268	10/100

Satellite co-axial outlets Radio/TV/SAT 3gang dead-end feeder

Broadband technology 47-2.150 MHz.
SAT connection designed as screwable F-male plug.
with remote feed via F-bush
For DVB-T and broadband-cable-systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0232-101-500	2CKA000230A0463	10/100

Terminating resistor 75 Ohm

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0239	2CKA000230A0201	10/100

Mounting plate [1]) [2]) with green insert



For 2 modular jack inserts.
For systems: CommScope (AVAYA / AT&T / Lucent Technologies), GigaSPEED, PowerSUM, 360 GS 10E bis MGS 600-BK, M1 BH-xx, MPS 100E-xx.
With R&M adapter R310694 suitable for R&M connection modules R305111, R305112, R305113 and R305114.
Pitch dimensions: (WxH) approx. 16.9 x 17.9 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1810-500	2CKA001753A9974	10/100

[1]) Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2]) For further information, please refer on the Internet.

Mounting plate [1]) [2]) with red insert



For 2 modular jack inserts.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
For systems: AMP / tyco Electronics, BTR, EFB, Krone, Panduit, Quante, Radiall, Setec, Dr.-Ing. Sieger, Telena, Thomas & Betts
For Telegärtner AMJ/UMJ connection modules/ couplings.
For 2 fiber optic modules of the following types: 3M-Volition, Krone, mvk.
Pitch dimensions: (WxH) approx. 14.8 x 19.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1812-500	2CKA001753A9972	10/100

[1]) Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2]) For further information, please refer on the Internet.

future® linear
Data communication

Mounting plate [1] [2] with black insert

For MTRJ or 2 modular jack inserts.
For systems: Ackermann, AMP / tyco Electronics (Slim Line (SL) -SM 2gang/switches: 110Connect Jacks, Toolless Jacks / Standard 110Connect Jacks), Brand-Rex, CombiNet, EFB Electronic, Telena.
For 2 fiber optic modules of the following types: AMP / tyco Electronics MTRJ.
Pitch dimensions: (WxH) approx. 14.8 x 20.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1814-500	2CKA001753A9973	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with orange base

For 2 modular jack inserts.
For system: LexCom 150 and LexCom 250.
Pitch dimensions: (WxH) approx. 15.4 x 15.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1819	2CKA001753A8056	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with grey base

For 2 modular jack inserts.
For system: Panduit MiniCom (Cu. z.B. TX6 10 Gig Shielded Jack modules and fiber optic modules.
Pitch dimensions: (WxH) approx. 15.9 x 18.7 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1820	2CKA001753A8057	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Flush-mounted assembly adapter

For the accommodation of one or two universal modules 0219.
For flush-mounted installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/12	2CKA000230A0395	1/10

Channel assembly adapter

For the accommodation of one or two universal modules 0219. For channel and under-floor installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/13	2CKA000230A0396	1/10

Universal module, RJ 45, cat. 6a iso, shielded [1] 1gang

For installation in installation adapter 0219/12 or 0219/13. Also suited for mounting into cover plate 2561-xxx, 2564-02-xxx and bases 1812, 1866 EB, and 1867 EB.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz). Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Cat. 6A according to ISO/IEC 11801: 2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability. Bend-radius optimised cable feed (30°). Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
For 8-pole plug RJ 45 only.
Housing made from diecast zinc.
With integrated dust-protection cap (can be removed if necessary). With insulation displacement connection
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219-101	2CKA000230A0413	1/10

[1] With assembly adapters appropriate for telephone unit cover plates 2539-21x and 1766-xxx.

Modular-Jack insert 6-pole Cat. 3 (AMP-No. 216000-2)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0210	2CKA000225A0078	10

Modular-Jack insert 8-pole Cat. 3 (AMP-No. 216005-4)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0211	2CKA000225A0086	10

future® linear
Data communication

Built-in jack

For potential balancing jack cover plate and installation in cover plates.
For devices of 19 mm diameter.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0471-0-0037	2CKA000471A0037	10

Potential balancing plug

Suitable for plug 2095 UC-212 and built-in jack 0471-0-0037 acc. to German Standard DIN 42801.
For potential balancing jack cover plate (connection up to 6 mm² crimped or soldered)
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0299-0-0032	2CKA000299A0032	10

Blank plate with metal mounting plate

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1742-81**	2CKA001710A3612	10
ivory white	**1742-82**	2CKA001710A3143	10
aluminium silver [1])	**1742-83**	2CKA001710A3664	10
studio white	**1742-84**	2CKA001710A3161	10/100
studio white	**1742-84-500**	2CKA001710A3991	10/100
studio white, matt [1])	**1742-884**	2CKA001710A3873	10/100
black matt [1])	**1742-885**	2CKA001710A3895	10

[1]) Surface painted.

Cover plate [1])

As cover for flex outlet, for cords up to 10.3 mm diameter.
With strain relief (without terminal block).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1749-81**	2CKA001710A3614	10
ivory white	**1749-82**	2CKA001710A3145	10
aluminium silver [2])	**1749-83**	2CKA001710A3665	10
studio white	**1749-84**	2CKA001710A3163	10/100
studio white, matt [2])	**1749-884**	2CKA001710A3878	10
black matt [2])	**1749-885**	2CKA001710A3900	10

[1]) Cover plate can also be used individually as cover for telephone connector boxes (VDo).
[2]) Surface painted.

Cover plate [1])

As cover for universal data connection boxes.
Art.-No. 0213 (Cat 3/ISDN), 0216-101, 0218/11-101 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
For WLAN access points 8186/31 and 8186/41.
Brand-Rex (WAEGV 8 EKR/EK).
BTR (universal data connecting unit design and IAE design).
Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.
With labelling field.
Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1803-81**	2CKA001710A3616	10
ivory white	**1803-82**	2CKA001710A3147	10
aluminium silver [2])	**1803-83**	2CKA001710A3674	10
studio white	**1803-84-500**	2CKA001710A1550	10/100
studio white, matt [2])	**1803-884**	2CKA001710A3889	10
black matt [2])	**1803-885**	2CKA001710A3912	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

future® linear
Data communication

Cover plate [1]) 2gang

As cover for universal data connection boxes.
Art. No. 0214, 0215 (Cat 3), 0220/12-507, 0221/12-507, 0218, 0217 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
Brand-Rex (WAEGV 8/8 EKR/EK).
AMP (NETCONNECT 5E).
BTR (E-DAT C6, E-DAT design, Universal data connecting unit design and IAE design).
cti (cti-wire 2.8 Cat.6).
Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.
With labelling field.
Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1803-02-81**	2CKA001710A3615	10
ivory white	**1803-02-82**	2CKA001710A3146	10
aluminium silver [2])	**1803-02-83**	2CKA001710A3610	10/100
studio white	**1803-02-84-500**	2CKA001710A1551	10/100
studio white, matt [2])	**1803-02-884**	2CKA001710A3888	10
black matt [2])	**1803-02-885**	2CKA001710A3911	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter.
USB power adapter insert 6475 U-500.
For loudspeaker connection box.
Suitable for part number 0248/0x-101.
For data modules.
Suitable for Art. No. 0219/12 and 0219/13.
For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1766-81**	2CKA001710A3613	10
ivory white	**1766-82**	2CKA001710A3144	10/100
aluminium silver [1])	**1766-83**	2CKA001710A3659	10/100
studio white	**1766-84-500**	2CKA001710A3992	10/100
studio white, matt [1])	**1766-884**	2CKA001710A3926	10
black matt [1])	**1766-885**	2CKA001710A3903	10

[1]) Surface painted.

Cover plate

As cover for telephone connector boxes (VDo).
Can be knocked out for single or double connection.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1745-81**	2CKA001710A3624	10
ivory white	**1745-82**	2CKA001710A3155	10
aluminium silver [1])	**1745-83**	2CKA001710A3675	10
studio white	**1745-84**	2CKA001710A3173	10
studio white, matt [1])	**1745-884**	2CKA001710A3874	10
black matt [1])	**1745-885**	2CKA001710A3896	10

[1]) Surface painted.

Cover plate [1]) socket outlet

Telephone socket (TDO)

Colour	Type	Order code	Pack/Qty.
anthracite	**1762-81-506**	2CKA001710A4103	10/100
ivory white	**1762-82-506**	2CKA001710A4104	10/100
aluminium silver [2])	**1762-83-506**	2CKA001710A4105	10/100
studio white	**1762-84-506**	2CKA001710A4106	10/100
studio white matt [2])	**1762-884-506**	2CKA001710A4108	10/100
black matt [2])	**1762-885-506**	2CKA001710A4109	10/100

[1]) Suitable insert: TDO 3x 10 OUP (for 1 telephone and 2 auxiliary devices).
[2]) Surface painted.

Cover plate [1]) [2])
as cover for standard Radio/TV/SAT socket outlets

With 2 connectors
Acc. to German Standard DIN 45330.
Radio/TV/SAT.
With M3 fixing screw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1743-81**	2CKA001724A4252	10
ivory white	**1743-82**	2CKA001724A2758	10
aluminium silver [3])	**1743-83**	2CKA001724A4262	10
studio white	**1743-84-500**	2CKA001724A4332	10/100
studio white, matt [3])	**1743-884**	2CKA001724A4293	10/100
black matt [3])	**1743-885**	2CKA001724A4298	10/100

[1]) Third opening can be knocked out.
[2]) See inserts for satellite coaxial socket outlets.
[3]) Surface painted.

future® linear
Data communication

Cover plate



As cover for 4gang Satellite co-axial socket outlet EVU 02 F, GEVU 15 S from Hirschmann.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1743-04-81**	2CKA001724A4374	10
ivory white	**1743-04-82**	2CKA001724A4375	10
aluminium silver [1])	**1743-04-83**	2CKA001724A4376	10
studio white	**1743-04-84**	2CKA001724A4377	10
studio white, matt [1])	**1743-04-884**	2CKA001724A4379	10
black matt [1])	**1743-04-885**	2CKA001724A4380	10

[1]) Surface painted.

Cover plate

As cover for 4gang Satellite co-axial socket outlet SAT400/EAS/DC, EAS 405, 413 DAS from Ankaro.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1743/10-04-81**	2CKA001724A4365	10
ivory white	**1743/10-04-82**	2CKA001724A4366	10
aluminium silver [1])	**1743/10-04-83**	2CKA001724A4367	10
studio white	**1743/10-04-84**	2CKA001724A4368	10/100
studio white, matt [1])	**1743/10-04-884**	2CKA001724A4370	10
black matt [1])	**1743/10-04-885**	2CKA001724A4371	10

[1]) Surface painted.

Cover plate [1]) with labelling field

For modular jack with slide entrance.
To fit only Art. No. 1810, 1812, 1814, 1816, 1818, 1819 and 1820.
Size of labelling field: 60 x 9 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1800-81**	2CKA001710A3627	10
ivory white	**1800-82**	2CKA001710A3158	10
aluminium silver [2])	**1800-83**	2CKA001710A3676	10
studio white	**1800-84-500**	2CKA001710A3990	10/100
studio white, matt [2])	**1800-884**	2CKA001710A3887	10
black matt [2])	**1800-885**	2CKA001710A3910	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Cover plate

For 1 modular jack.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2561-81**	2CKA001753A0400	10
ivory white	**2561-82**	2CKA001753A0401	10
aluminium silver [1])	**2561-83**	2CKA001753A0402	10
studio white	**2561-84**	2CKA001753A0403	10
studio white, matt [1])	**2561-884**	2CKA001753A0405	10
black matt [1])	**2561-885**	2CKA001753A0406	10

[1]) Surface painted.

Cover plate

For 2 modular jack inserts.
Suitable for Art. No. 0210 and 0211.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2561-02-81**	2CKA001753A0317	10
ivory white	**2561-02-82**	2CKA001753A0392	10
aluminium silver [1])	**2561-02-83**	2CKA001753A0393	10
studio white	**2561-02-84**	2CKA001753A0394	10
studio white, matt [1])	**2561-02-884**	2CKA001753A0396	10
black matt [1])	**2561-02-885**	2CKA001753A0397	10

[1]) Surface painted.

Cover plate

For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1746/10-81**	2CKA001710A3628	10
ivory white	**1746/10-82**	2CKA001710A3521	10
aluminium silver [1])	**1746/10-83**	2CKA001710A3677	10
studio white	**1746/10-84-500**	2CKA001710A3993	10/100
studio white, matt [1])	**1746/10-884**	2CKA001710A3875	10
black matt [1])	**1746/10-885**	2CKA001710A3897	10

[1]) Surface painted.

future® linear
Data communication

Intermediate ring Reflex SI/SI Linear

For fitting cover plates from the Busch-Duro 2000® SI and Reflex SI range.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1747 SI-82**	2CKA001710A3862	10
aluminium silver [1])	**1747 SI-83**	2CKA001710A4091	10
studio white	**1747 SI-84**	2CKA001710A3863	10

[1]) Surface painted.

Intermediate ring Busch-balance® SI

For attaching cover plates from the Busch-balance® SI range.
Delivery without cover plate.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1747 BSI-81**	2CKA001710A4093	10
ivory white	**1747 BSI-82**	2CKA001710A4094	10
aluminium silver [1])	**1747 BSI-83**	2CKA001710A4095	10
studio white	**1747 BSI-84**	2CKA001710A4096	10/100
studio white, matt [1])	**1747 BSI-884**	2CKA001710A4098	10
black matt [1])	**1747 BSI-885**	2CKA001710A4099	10

[1]) Surface painted.

Cover plate

With hinged lid. For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1746-81**	2CKA001710A3618	10
ivory white	**1746-82**	2CKA001710A3149	10
aluminium silver [1])	**1746-83**	2CKA001710A3678	10
studio white	**1746-84**	2CKA001710A3167	10
studio white, matt [1])	**1746-884**	2CKA001710A3876	10
black matt [1])	**1746-885**	2CKA001710A3898	10

[1]) Surface painted.

Intermediate ring with hinged lid [1]) Busch-balance® SI

For attaching cover plates from the Busch-balance® SI range.
Delivery without cover plate.
With sealing ring.
With hinged lid.
Protection class (Device): IP 44
Dimensions: (L x W x D): 63 mm x 63 mm x 20 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**2518-WD-81**	2CKA001719A0217	10
ivory white	**2518-WD-82**	2CKA001719A0218	10
aluminium silver [2])	**2518-WD-83**	2CKA001719A0219	10
studio white	**2518-WD-84**	2CKA001719A0220	10
studio white, matt [2])	**2518-WD-884**	2CKA001719A0222	10
black matt [2])	**2518-WD-885**	2CKA001719A0223	10

[1]) Combinable only with covers for flush-mounted inserts
[2]) Surface painted.

XLR centre plate

As cover for Neutrik plug connectors, type D series.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2553-81**	2CKA001724A4399	10
ivory white	**2553-82**	2CKA001724A4400	10
aluminium silver [1])	**2553-83**	2CKA001724A4401	10
studio white	**2553-84**	2CKA001724A4402	10
studio white, matt [1])	**2553-884**	2CKA001724A4404	10
black matt [1])	**2553-885**	2CKA001724A4405	10

[1]) Surface painted.

future® linear
Data communication

Equipotential socket outlet 2gang

Without claws.
For connecting wires up to 1 x 6 mm² and 4 x 2.5 mm².
IEC 60601-1:2005; DIN EN 60601 (VDE 0750-1): July 2007
Connection bolts German Standard DIN 42801.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2095 UC-81**	2CKA002495A0084	10
ivory white	**2095 UC-82**	2CKA002495A0085	10
aluminium silver [1])	**2095 UC-83**	2CKA002495A0089	10
studio white	**2095 UC-84**	2CKA002495A0086	10
studio white, matt [1])	**2095 UC-884**	2CKA002495A0091	10
black matt [1])	**2095 UC-885**	2CKA002495A0092	10

[1]) Surface painted.

Cover plate with metal mounting plate

With screw-type terminal.
Fixed with central locknut.
As cover for pilot devices with a diameter of 22.5 mm
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2533-81**	2CKA001724A4254	10
ivory white	**2533-82**	2CKA001724A4255	10
yellow	**2533-82-15**	2CKA001724A4382	10
aluminium silver [1])	**2533-83**	2CKA001724A4261	10
studio white	**2533-84**	2CKA001724A4256	10
studio white, matt [1])	**2533-884**	2CKA001724A4296	10
black matt [1])	**2533-885**	2CKA001724A4301	10

[1]) Surface painted.

Cover plate [1]) with metal mounting plate

For communication devices.
With labelling field 60.2 x 10.2 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1758-81**	2CKA001724A4253	10
ivory white	**1758-82**	2CKA001724A2759	10
aluminium silver [2])	**1758-83**	2CKA001724A4263	10
studio white	**1758-84**	2CKA001724A2761	10/100
studio white, matt [2])	**1758-884**	2CKA001724A4307	10
black matt [2])	**1758-885**	2CKA001724A4299	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2]) Surface painted.

Intermediate ring

For attaching cover plates with the dimensions of 55 x 55 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
ivory white	**1747-82**	2CKA001710A3860	10
aluminium silver [1])	**1747-83**	2CKA001710A4090	10
studio white	**1747-84**	2CKA001710A3861	10

[1]) Surface painted.

future® linear

Multimedia / communication adapters

Busch-Radio DAB+ [1])

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Control/Signal outputs: 2, Loudspeaker output, impedance 4 Ohm
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8215 U-101-500	2CKA008200A0276	1/10

[1]) No claw. Screw-fixing via keyholes.

Busch-Radio DAB+, complete set [1])

Ready-to-install DAB+ radio alarm clock for mono operation (set packaged). With high-resolution colour display for showing additional information. Consisting of the Busch-Radio DAB+ 8215 U-101. Consisting of speaker insert 8223 U. Consisting of the cover plate for Busch-Radio 8252-84-101. Consisting of cover plate for speaker insert 8253-84. Consisting of 2gang future® linear cover frame 1722-184K.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 150 mm x 80 mm x 49 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
studio white	**8220 UJ-84-101-500**	2CKA008200A0234	1

[1]) No claw. Screw-fixing via keyholes.

Busch-Radio BTconnect DAB+ [1]) with Bluetooth interface for music replay.

DAB+ and RDS stereo radio alarm clock for flush-mounted installation. With high-resolution colour display for showing additional information.
With Bluetooth interface for music replay of mobile devices. Connection of external Bluetooth loudspeakers possible. Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible. For mono/stereo operation. 8 radio stations storable. With time and date display. With individual alarm and snooze function. With automatic switch-off function (automatic sleep mode). With extension input to remote-controlled ON/OFF switches. With integrated antenna. With additional connection for external antenna. Permitted speaker impedance: 4 - 8 Ohm. Can be installed as 1gang and in multiple combinations. Bluetooth specification: 4.2. Bluetooth profiles supported: A2DP.
Number of stored Bluetooth connections: max. 8
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Bluetooth™

Colour	Type	Order code	Pack/Qty.
	8217 U-101-500	2CKA008200A0279	1/10

[1]) No claw. Screw-fixing via keyholes.

Busch-Radio BTconnect DAB+, complete set [1]) with Bluetooth interface for music replay.

Ready-to-install DAB+ radio alarm clock for mono operation (set packaged). With high-resolution colour display for showing additional information. With Bluetooth interface for music replay of mobile devices. Connection of external Bluetooth loudspeakers possible. Consisting of the Busch-Radio BTconnect DAB+ 8217 U-101. Consisting of speaker insert 8223 U. Consisting of the cover plate for Busch-Radio 8252-84-101. Consisting of cover plate for speaker insert 8253-84. Consisting of 2gang future® linear cover frame 1722-184K.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 150 mm x 80 mm x 49 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
studio white	**8270 UJ-84-101-500**	2CKA008200A0237	1

[1]) No claw. Screw-fixing via keyholes.

future® linear

Multimedia / communication adapters

Flush Mounted Inserts Flush-mounted installation boxes and inserts

Multi media connector ins.

Colour	Type	Order code	Pack/Qty.
	8231 U	2CKA008200A0223	1/10

Loudspeaker insert [1] 5 cm (2")

With flat plug connector.
With broadband characteristics.
Rated output: 2 W (RMS)
Incl. speaker connection cable.
Frequency response: 200 - 20,000 Hz
Impedance: 4 Ohm
Protection class (Device): IP 20, SELV
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1/10

[1] No claw. Screw-fixing via keyholes.

USB power adapter insert, flush-mounted [1] [2] With USB-A & USB-C interface

For supply and support of mobile devices via USB-cable.
With USB type A and USB type C female connector.
To support two devices at the same time.
Supports automatic negotiating of optimum charging parameters for the shortest charging times.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Outputs: 2x USB charging interface
Suitable for: Only USB-A bus occupied:
Rated current: 3000 mA
Output voltage: 5 V-
Suitable for: Only USB-C bus occupied:
Rated power: 18 W

Suitable for: USB-A and USB-C bus occupied. Total:
Rated current: 3250 mA
Output voltage: 5 V-
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.

65 W power adapter insert, flush-mounted [1] [2] with USB-C interface NEW

For power and charge of mobile devices via USB-C cable.
With USB type C female connector. Supports high power and automatic negotiating of optimum charging parameters for the shortest charging times.
Support of charging protocols: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the Qualcomm quick charge protocols: QC 2.0, 3.0, 4.0 and 5.
Support of USB PD (power delivery): 3.1 incl. PPS (programmable power supply).
Support of manufacturer specific protocolls: Samsung AFC and Huawei FCP (with 20 W).
With electronic short-circuit protection.
With electronic overload protection.
Fitting cover plate: 6479-...-500.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Power loss: < 75 mW
Outputs: 1x USB-C charging interface
Rated power: 65 W
Output voltage: 5 V, 9 V, 12 V, 15 V, 20.0 V DC
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 44 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6479 U-500	2CKA006400A0437	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.

HDMI connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link high-definition digital audio and video data from e.g. SAT-receiver, DVD-/Blue-Ray-player to plasma-type, LCD- or-LED-TVs/screens.
HDMI-type A, 3D-compatible.
Fully HD ready (1920 x 1080 pixel).
For 20-wire HDMI-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/31-500**	2CKA000230A0430	1
grey	**0261/33-500**	2CKA000230A0432	1
alpine white	**0261/32-500**	2CKA000230A0431	1

[1] Please follow the recommendations of the cable and device producers for the max. HDMI cable lengths.

future® linear

Multimedia / communication adapters

VGA connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link analogue video data between PCs and laptops to monitors or digital projectors etc.
VGA-type: D-type, 15-pole.
Fully HD ready (1920 x 1080 pixel).
For 15-wire VGA-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/21-500**	2CKA000230A0424	1
grey	**0261/23-500**	2CKA000230A0426	1
alpine white	**0261/22-500**	2CKA000230A0425	1

[1] Please follow the recommendations of the cable and device producers for the max. VGA cable lengths.

USB connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link mobile devices like e.g. printer, scanner, USB-sticks or digital cameras etc.
USB-type A, USB 2.0 compatible.
For 5-wire USB- cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate. Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/11-500**	2CKA000230A0418	1
grey	**0261/13-500**	2CKA000230A0420	1
alpine white	**0261/12-500**	2CKA000230A0419	1

[1] Please follow the recommendations of the cable and device producers for the max. USB cable lengths.

Communication adapter for BNC-F Duct-jacks

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems. Without cover plate.
Without claws. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0262/11-500**	2CKA000230A0436	1
grey	**0262/13-500**	2CKA000230A0438	1
alpine white	**0262/12-500**	2CKA000230A0437	1

F duct-jack for communication adapter

For connection of antenna cables e.g.. for TVs with integrated TV-tuner and satellite receiver.
With screw-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**0262-500**	2CKA000230A0440	1

Communication adapter for Cinch-jacks



Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate. Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0263/11-500**	2CKA000230A0444	1
grey	**0263/13-500**	2CKA000230A0446	1
alpine white	**0263/12-500**	2CKA000230A0445	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked white: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
alpine white	**0263/04-500**	2CKA000230A0451	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked black: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
black	**0263/05-500**	2CKA000230A0452	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked red: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Red	**0263/06-500**	2CKA000230A0453	1

future® linear

Multimedia / communication adapters

Cinch-jacks for communication adapter

For connecting analogue video devices, such as DVD players, hard disc recorders, video recorders or receivers.
Marked yellow: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
yellow	**0263/07-500**	2CKA000230A0454	1

Communication adapter for Mini-jacks 3,5mm

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0264/11-500**	2CKA000230A0458	1
grey	**0264/13-500**	2CKA000230A0460	1
alpine white	**0264/12-500**	2CKA000230A0459	1

Mini-jack 3,5 mm for communication adapter

For the connection of mobile terminal devices such as MP3 player (stereo), mobile telephone and smartphones.
Audio-band 20Hz - 20kHz.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
chrome gloss	**0264-500**	2CKA000230A0462	1

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0248/02-101**	2CKA000230A0402	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back).
With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back).
With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**0248/05-101**	2CKA000230A0404	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Cover plate

For Busch-Radio DAB+ 8215 U-101.
For Busch-Radio BTconnect DAB+ 8217 U-101.
For Busch-Radio iNet 8216 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**8252-81-101-500**	2CKA008200A0249	10
ivory white	**8252-82-101-500**	2CKA008200A0251	10
aluminium silver [1])	**8252-83-101-500**	2CKA008200A0253	10
studio white	**8252-84-101-500**	2CKA008200A0255	10
studio white matt [1])	**8252-884-101-500**	2CKA008200A0259	10
black matt [1])	**8252-885-101-500**	2CKA008200A0261	10

[1]) Surface painted.

Cover plate

For loudspeaker insert 8223 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**8253-81**	2CKA008200A0078	1/10
ivory white	**8253-82**	2CKA008200A0079	1/10
aluminium silver [1])	**8253-83**	2CKA008200A0080	1/10
studio white	**8253-84**	2CKA008200A0081	1/10
studio white, matt [1])	**8253-884**	2CKA008200A0123	1/10
black matt [1])	**8253-885**	2CKA008200A0126	1/10

[1]) Surface painted.

future® linear

Multimedia / communication adapters

CoverPlates (partly incl. Insert) Hotel application

C-plate media connector.

Colour	Type	Order code	Pack/Qty.
studio white	**8256-81**	2CKA008200A0227	1/10
aluminium silver [1])	**8256-82**	2CKA008200A0229	1/10
studio white, matt [1])	**8256-83**	2CKA008200A0225	1/10
anthracite	**8256-84**	2CKA008200A0224	1/10
black matt [1])	**8256-884**	2CKA008200A0226	1/10
ivory white	**8256-885**	2CKA008200A0228	1/10

[1]) Surface painted.

Cover plate

For telephone connection unit. For USB, VGA, HDMI inserts and communication adapter.
USB power adapter insert 6475 U-500.
For loudspeaker connection box.
Suitable for part number 0248/0x-101.
For data modules.
Suitable for Art. No. 0219/12 and 0219/13.
For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1766-81**	2CKA001710A3613	10
ivory white	**1766-82**	2CKA001710A3144	10/100
aluminium silver [1])	**1766-83**	2CKA001710A3659	10/100
studio white	**1766-84-500**	2CKA001710A3992	10/100
studio white, matt [1])	**1766-884**	2CKA001710A3926	10
black matt [1])	**1766-885**	2CKA001710A3903	10

[1]) Surface painted.

Cover plate for power adapter insert

NEW

Cover plate for USB-C 65 W power adapter 6479 U-500.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**6479-81-500**	2CKA006400A0444	1
aluminium silver [1])	**6479-83-500**	2CKA006400A0448	1
studio white	**6479-84-500**	2CKA006400A0450	1
studio white, matt [1])	**6479-884-500**	2CKA006400A0452	1
black matt [1])	**6479-885-500**	2CKA006400A0454	1

[1]) Surface painted.

Cover plate with metal mounting plate

With fixing claws.
loudspeaker inserts and cover. With soldering tag.
For covering universal data communication connectors and circular connectors with screwed plug M 16x0.75 (installable in insert) in accordance with DIN 41524, 41529, 45322, 45327, 45328 and 45329.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1751-81**	2CKA001723A0253	10
ivory white	**1751-82**	2CKA001723A0239	10
aluminium silver [1])	**1751-83**	2CKA001723A0254	10
studio white	**1751-84**	2CKA001723A0240	10/100
studio white, matt [1])	**1751-884**	2CKA001723A0260	10
black matt [1])	**1751-885**	2CKA001723A0259	10

[1]) Surface painted.

Cover plate with rotary control, with marking

As a cover for volume controllers.
Suitable for the >LR mono BJ FM< devices of WHD.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1740 DR/03-81**	2CKA001710A4120	10
ivory white	**1740 DR/03-82**	2CKA001710A3807	10
aluminium silver [1])	**1740 DR/03-83**	2CKA001710A3811	10
studio white	**1740 DR/03-84**	2CKA001710A3808	10
studio white, matt [1])	**1740 DR/03-884**	2CKA001710A3870	10
black matt [1])	**1740 DR/03-885**	2CKA001710A3892	10

[1]) Surface painted.

Cover plate for Busch-powerDock

END OF LIFE

For Busch-powerDock charging cradle.

Colour	Type	Order code	Pack/Qty.
anthracite	**6477-81**	2CKA006400A0056	10
ivory white	**6477-82**	2CKA006400A0057	10
aluminium silver [1])	**6477-83**	2CKA006400A0058	10
studio white	**6477-84**	2CKA006400A0059	10/100
studio white matt [1])	**6477-884**	2CKA006400A0062	10
black matt [1])	**6477-885**	2CKA006400A0063	10

[1]) Surface painted.

future® linear
Room thermostats

Room thermostat, flush-mounted [1] [2] [3]

END OF LIFE

Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0512	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Slide switch

END OF LIFE

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 U-500	2CKA001032A0514	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Sliding switch, 24 V

END OF LIFE

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~
Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 U	2CKA001032A0485	1
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] 1gang 2way

END OF LIFE

With fixing claws.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 U-101-500	2CKA001032A0513	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

future® linear
Room thermostats

Room thermostat, flush-mounted [1] [2] [3]
Actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 UTA	2CKA001032A0487	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Sliding switch, actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached.
With built-in slide switch and control lamp for nightly reduction of 4 K.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UTA	2CKA001032A0488	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Sliding switch, actual value indication, 24 V

END OF LIFE

With actual value temperature display
Automatic controller calibration
Switch contact opens when the set temperature is reached.
With built-in slide switch and control lamp for nightly reduction of 4 K.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 24 V~
Rated current: 1 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1096 UTA	2CKA001032A0489	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat, e.g., Art. No. 6164/10 .
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3]
Change-over contact, actual value indication

END OF LIFE

With actual value temperature display
Automatic controller calibration
With fixing claws.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 UTA	2CKA001032A0490	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized“ design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

future® linear
Room thermostats

Room thermostat, flush-mounted [1] [2] [3] Change-over contact, setpoint indication, timer

END OF LIFE

With change-over contact. Easy adjustment using menu and text-based display. 4 switching times per day can be user-defined for each day of the week. With fixing claws. Automatic summer/wintertime switch-over.
Power reserve > 10 hours. To fit cover plate 6435-xxx.
Class of temperature controller 1.
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~.
Rated current: 10 A.
Temperature range (Device): 5 °C to 30 °C.
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mm
EN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 U-101	2CKA001032A0508	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] Remote sensor

END OF LIFE

With remote sensor and thermal feedback
For underfloor heating.
With built-in slide switch and control lamp for nightly reduction of 4 K. Switch contact opens when the set temperature is reached. With fixing claws.
Remote sensor cable length: 4 m. Sensor =NTC, 10 kilo-ohm at 25 degrees C. Adjusting range: +10 to +50° C.
Connecting cable: 1mm² to 2.5 mm². Separate terminal to activate nighttime mode and reduction of room temperature by 4K. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Rated current: 16 A, cos ϕ 1
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UF	2CKA001032A0497	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Room thermostat, flush-mounted [1] [2] Change-over contact, setpoint indication, timer, remote sensor

END OF LIFE

With change-over contact. Easy adjustment using menu and text-based display. 4 switching times per day can be user-defined for each day of the week. With fixing claws.
Automatic summer/wintertime switch-over
Remote sensor cable length: 4 m.
Sensor =NTC, 10 kilo-ohm at 25 degrees C.
Power reserve > 10 hours. To fit cover plate 6435-xxx.
Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~
Rated current: 16 A. Temperature range (Device): 10 °C to 50 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 UF-101	2CKA001032A0509	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.

Room Thermostat

NEW

Electronic room thermostat, open contact, fm
Normally open contact, non-isolated
Switch contact opens when the set temperature is reached. Without fixing claws.
Separate terminal to activate eco mode to reduce the room temperature by 3K. See respective cover plates 1794 R-xx. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Power dissipation: ≤ 0,15 W
Rated current: 10 A. Temperature range (device): 5 °C - 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm. Protection class device: IP 20
Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete. Servo-valves, "de-energised open", are necessary for connection to thermostat. e.g. Article No. 6164/10-102. Switching temperature difference: ± 0.5 K

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0525	1/10
	1097 U-101-500	2CKA001032A0528	1/10
	1099 UHK-101-500	2CKA001032A0531	1/10

RTC Room Temperature Controller

NEW

Room Temperature Controller for Room thermostat Bluetooth with Setpoint display, Timer and Remote control Button 230 V

Colour	Type	Order code	Pack/Qty.
	1095 UTA-BT-500	2CKA001032A0534 Insert - Bluetooth	1
	1094 USITA-BT-500	2CKA001032A0536 Insert - Bluetooth	1
	1096 UTA-BT-500	2CKA001032A0538 Insert - Bluetooth	1
	1099 UHKTA-BT-500	2CKA001032A0540 Insert - Bluetooth	1
	62841 U-WL-500	2CKA006800A3115 Insert - free@home	1
	62842 U-WL-500	2CKA006800A3117 Insert - free@home	1
	62843 U-WL-500	2CKA006800A3119 Insert - free@home	1

future® linear
Room thermostats

Cover Plate Thermostat Turn button - 63x63

NEW

C-plate for room thermostats 1094 U-101, 1097 U-101, 1099 U-101.

Colour	Type	Order code	Pack/Qty.
anthracite	**1794 R-81**	2CKA001710A4198	10
ivory white	**1794 R-82**	2CKA001710A4199	10
aluminium silver [1]	**1794 R-83**	2CKA001710A4200	10
studio white	**1794 R-84**	2CKA001710A4201	10
studio white, matt [1]	**1794 R-884**	2CKA001710A4204	10
black matt [1]	**1794 R-885**	2CKA001710A4205	10

[1] Surface painted.

Room thermostat, flush-mounted [1] [2] [3] Heating/cooling

END OF LIFE

With separate connection (230 V~) for external switchover between heating or cooling. Switch contact opens when the set temperature is reached. With fixing claws. Nominal current: 10 A heating. Nominal current: 5 A cooling. Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~. Temperature range (Device): 5 °C to 30 °C. Dimensions: (L x W x D): 12 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1099 UHK-101-500	2CKA001032A0515	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Heating/cooling, sliding switch

END OF LIFE

With built-in sliding switch for switchover between cooling or heating. Switch contact opens when the set temperature is reached. With fixing claws.
Nominal current: 10 A heating. Nominal current: 5 A cooling
Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 12 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1099 UHKEA	2CKA001032A0516	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Cover plate for room thermostat

For room thermostats 1094 U, 1097 U.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1794-81**	2CKA001710A3629	10
ivory white	**1794-82**	2CKA001710A3543	10
aluminium silver [1]	**1794-83**	2CKA001710A3668	10
studio white	**1794-84**	2CKA001710A3544	10
studio white, matt [1]	**1794-884**	2CKA001710A3884	10
black matt [1]	**1794-885**	2CKA001710A3907	10

[1] Surface painted.

Cover plate for room thermostat

With sliding switch for nightly room temperature reduction. to activate nighttime mode and reduction of room temperature by 4K, for thermostats 1095 U, 1096 U and 1095 UF.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1795-81**	2CKA001710A3630	10
ivory white	**1795-82**	2CKA001710A3568	10
aluminium silver [1]	**1795-83**	2CKA001710A3669	10
studio white	**1795-84**	2CKA001710A3569	10
studio white, matt [1]	**1795-884**	2CKA001710A3886	10
black matt [1]	**1795-885**	2CKA001710A3909	10

[1] Surface painted.

Cover plate for room thermostat

For room thermostats 1094 UTA, 1097 UTA.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1794 TA-81**	2CKA001710A3695	10
ivory white	**1794 TA-82**	2CKA001710A3696	10
aluminium silver [1]	**1794 TA-83**	2CKA001710A3697	10
studio white	**1794 TA-84**	2CKA001710A3698	10
studio white, matt [1]	**1794 TA-884**	2CKA001710A3883	10
black matt [1]	**1794 TA-885**	2CKA001710A3906	10

[1] Surface painted.

future® linear
Room thermostats

Cover plate for room thermostat

With sliding switch for nightly room temperature reduction. For room thermostats 1095 UTA, 1096 UTA.

Colour	Type	Order code	Pack/Qty.
anthracite	**1795 TA-81**	2CKA001710A3722	10
ivory white	**1795 TA-82**	2CKA001710A3723	10
aluminium silver [1])	**1795 TA-83**	2CKA001710A3724	10
studio white	**1795 TA-84**	2CKA001710A3725	10
studio white, matt [1])	**1795 TA-884**	2CKA001710A3885	10
black matt [1])	**1795 TA-885**	2CKA001710A3908	10

[1]) Surface painted.

Cover plate

For room thermostats 1098 U-101 and 1098 UF-101.
For short-time timer 6465 U-101. For Busch-CO2 sensor 1091 U-500. For blind compact timer 6422 U.

Colour	Type	Order code	Pack/Qty.
anthracite	**6435-81**	2CKA006430A0303	10
ivory white	**6435-82**	2CKA006430A0304	10
aluminium silver [1])	**6435-83**	2CKA006430A0305	10
studio white	**6435-84**	2CKA006430A0306	10
studio white, matt [1])	**6435-884**	2CKA006430A0388	10
black matt [1])	**6435-885**	2CKA006430A0389	10

[1]) Surface painted.

Cover plate for room thermostat

For room temperature controller 1099 UHK.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1795 HK-81**	2CKA001710A4013	10
ivory white	**1795 HK-82**	2CKA001710A4015	10
aluminium silver [1])	**1795 HK-83**	2CKA001710A4016	10
studio white	**1795 HK-84**	2CKA001710A4017	10
studio white, matt [1])	**1795 HK-884**	2CKA001710A4019	10
black matt [1])	**1795 HK-885**	2CKA001710A4020	10

[1]) Surface painted.

Cover plate for room thermostat

For room temperature controller 1099 UHKEA.
With sliding switch for switchover between cooling or heating.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
anthracite	**1795 HKEA-81**	2CKA001710A4045	10
ivory white	**1795 HKEA-82**	2CKA001710A4047	10
aluminium silver [1])	**1795 HKEA-83**	2CKA001710A4048	10
studio white	**1795 HKEA-84**	2CKA001710A4049	10
studio white, matt [1])	**1795 HKEA-884**	2CKA001710A4051	10
black matt [1])	**1795 HKEA-885**	2CKA001710A4052	10

[1]) Surface painted.

Cover Plate, Thermostat Various symbols for Thermostat anthracite - Platform 63

NEW

Central plate with print for room temperature controller with display/Bluetooth or free@home wireless
For room temperature controller with display:
1094 USITA-BT - 1095 UTA-BT - 1096 UTA-BT -
1099 UHKTA-BT - 62841 U-WL - 62842 U-WL - 62843 U-W

Colour	Type	Order code	Pack/Qty.
anthracite	**1794 MDRT-81**	2CKA006430A0417	
ivory white	**1794 MDRT-82**	2CKA006430A0418	
aluminium silver [3])	**1794 MDRT-83**	2CKA006430A0419	
studio white	**1794 MDRT-84-500**	2CKA006430A0421	
studio white matt [1])	**1794 MDRT-884**	2CKA006430A0423	
black matt [3])	**1794 MDRT-885**	2CKA006430A0424	

[1]) Surface painted.

future® linear
LED light

CoverPlates (partly incl. Insert) LED light Studio white

Complete set consists flush-mounted LED insert Night light (cold white) 2067/14 U.
Wall module with one lighting direction, design future® linear 2068/11-84.
Cover frame design future® linear 1721-184K.
With one lighting direction.
Not dimmable.
For low brightness (night light).
Colour temperature 6,500 K (cold white) System power consumption: 0.15 W Rated voltage: 230 V~, + 10% / - 10% Current consumption of LED: 40 mA (secondary)
Secondary: SELV

Colour	Type	Order code	Pack/Qty.
	2069/11-84	2CKA001510A0015	1/10

Flush Mounted Inserts LED light

Consisting of LED/FM insert, power module (neutral white) 2067/12 U.
Consisting of ceiling module, one light direction 2068/21.
For ambient lightning.
Light outlet downward.
Not dimmable.
Light intensity can be switched between 100% and 25% using front service switch.
Colour temperature: 4,000 K (neutral white)
System power consumption: 5 W
Rated voltage: 230 V~, + 10% / - 10% Current consumption of LED: 350 mA (secondary)
Secondary: SELV

Colour	Type	Order code	Pack/Qty.
	2069/21	2CKA001510A0018	1/10

Flush-mounted LED insert [1] [2]) Power module neutral white

For Busch-iceLight wall and ceiling module Type 2068/xx.
High brightness, e.g. for the display of information.
Colour temperature: 4,000 K (neutral white)
Not dimmable.
Light intensity can be switched between 100% and 25% using front service switch.
System power consumption: 5 W
Rated voltage: 230 V~, + 10% / - 10%
Current consumption of LED: 350 mA (secondary)
Secondary: SELV
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 40 °C
Dimensions: (L x W x D): -32 mm x 71 mmEN 62031/VDE 0715-5 of Jan. 2009

Colour	Type	Order code	Pack/Qty.
	2067/12 U	2CKA001510A0002	1/10

[1] Use relay inserts when switching through movement sensors or comfort switches.
[2] For switching the LED flush mounted insert use switches without orientation light only.

Flush-mounted LED insert [1] [2]) Night light warm white

For Busch-iceLight wall and ceiling module Type 2068/xx.
For low brightness (night light).
Colour temperature: 3,000 K (warm white)
Not dimmable.
System power consumption: 0.15 W
Rated voltage: 230 V~, + 10% / - 10%
Current consumption of LED: 40 mA (secondary)
Secondary: SELV
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 40 °C
Dimensions: (L x W x D): -32 mmEN 62031/VDE 0715-5 of Jan. 2009

Colour	Type	Order code	Pack/Qty.
	2067/13 U	2CKA001510A0012	1/10

[1] Use relay inserts when switching through movement sensors or comfort switches.
[2] For switching the LED flush mounted insert use switches without orientation light only.

Busch-iceLight® set, night light complete set

Complete set consists flush-mounted LED insert Night light (cold white) 2067/14 U.
Wall module with one lighting direction, design future® linear 2068/11-84.
Cover frame design future® linear 1721-184K.
With one lighting direction.
Not dimmable.
For low brightness (night light).
Colour temperature 6,500 K (cold white)
System power consumption: 0.15 W
Rated voltage: 230 V~, + 10% / - 10%
Current consumption of LED: 40 mA (secondary)
Secondary: SELV.

Colour	Type	Order code	Pack/Qty.
	2069/11-84	2CKA001510A0015	1/10

Busch-iceLight® set, ceiling light complete set

Consisting of LED/FM insert, power module (neutral white) 2067/12 U.
Consisting of ceiling module, one light direction 2068/21.
For ambient lightning.
Light outlet downward.
Not dimmable.
Light intensity can be switched between 100% and 25% using front service switch.
Colour temperature: 4,000 K (neutral white)
System power consumption: 5 W
Rated voltage: 230 V~, + 10% / - 10%
Current consumption of LED: 350 mA (secondary)
Secondary: SELV

Colour	Type	Order code	Pack/Qty.
	2069/21	2CKA001510A0018	1/10

future® linear
LED light

Flush-mounted LED insert [1] [2]) Night light cold white

For Busch-iceLight wall and ceiling module Type 2068/xx.
For low brightness (night light).
Colour temperature 6,500 K (cold white)
Not dimmable.
System power consumption: 0.15 W
Rated voltage: 230 V~, + 10% / - 10%
Current consumption of LED: 40 mA (secondary)
Secondary: SELV
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 40 °C
Dimensions: (L x W x D): -32 mmEN 62031/VDE 0715-5 of Jan. 2009

Colour	Type	Order code	Pack/Qty.
	2067/14 U	2CKA001510A0013	1/10

[1] Use relay inserts when switching through movement sensors or comfort switches.
[2] For switching the LED flush mounted insert use switches without orientation light only.

CoverPlates (partly incl. Insert) LED light

For ambient and orientation lightning. Light outlet top or bottom. For the accommodation of decorative insert types 2145-19, 2144/1x-19, 2144/2x-19, 2145/1x-19, and 2145/2x-19. Standard decorative insert 2145-19 premounted when delivered.

Colour	Type	Order code	Pack/Qty.
	2068/11-84	2CKA001510A0005	1

CoverPlates (partly incl. Insert) LED light

For ambient, orientation lightning and Infolight. Light outlet on all four sides and front. For the accommodation of decorative inserts and pictograms, 2144/xx-19, 2145/xx-19, and 2145-19. Standard decorative insert 2145-19 premounted when delivered.

Colour	Type	Order code	Pack/Qty.
	2068/14-84	2CKA001510A0008	1

CoverPlates (partly incl. Insert) LED light

For ambient lightning. Light outlet downward.

Colour	Type	Order code	Pack/Qty.
	2068/21	2CKA001510A0014	1

Ceiling module solo/future® linear flush-type

For ambient lightning.
Light outlet downward.
Flat construction type, almost flush with frame; combinable.
Dimensions: (L x W x D): 63 mm x 63 mm x 9 mm

Colour	Type	Order code	Pack/Qty.
	2068/22-84	2CKA001510A0017	1

Info light unit [1] [2])

Size of information field 43 x 43 mm.
Long service life of the lighting element (LEDs).
Homogeneous backlighting of the information field.
Colour temperature 6,500 K (cold white)
Power consumption: < 0.5 W
Rated voltage: 230 V~
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2062 U	2CKA001511A0115	1/10

[1] Use relay inserts when switching through movement sensors or comfort switches.
[2] For switching the LED flush mounted insert use switches without orientation light only.

future® linear
LED light

Cover plate [1] [2]

As cover for flush-mounted info light.
For insert 2062 U.
Size of information field 43 x 43 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**1716-81**	2CKA001731A1921	1
ivory white	**1716-82**	2CKA001731A1922	1
aluminium silver [3]	**1716-83**	2CKA001731A1950	1
studio white	**1716-84**	2CKA001731A1923	1
studio white, matt [3]	**1716-884**	2CKA001731A1978	1
black matt [3]	**1716-885**	2CKA001731A1980	1

[1] Included with the cover are 46 different text labels and symbols.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Surface painted.

Flush Mounted Inserts Flush-mounted installation boxes and inserts White

Without cover.

Colour	Type	Order code	Pack/Qty.
	2061 U	2CKA001511A0062	1

Cap for indication lamp

For indication lamps.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
clear-transparent	**1565-11**	2CKA001565A0167	10
Red	**1565-12**	2CKA001565A0175	10
green	**1565-13**	2CKA001565A0183	10

future® linear

Busch-Infoline®

Cover plate [1] [2] 1gang, with labelling field

With operating knob. For signal/cancel push-button 1520/1 UK. For monitoring unit 1511 U.
For Busch-Leakage guard insert 1531 U.
With labelling field 61 x 20 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1571 CN-84**	2CKA001582A0346	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] 2gang, with labelling field

With operating knob. For signal push-button insert 1520/1 UKZ. With labelling field 61 x 20 mm.
With exchangeable inlays in read and green for the individual designation of the operating knob.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1572 CN-84**	2CKA001582A0348	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] with red and neutral light panel and labelling field

For Alarm Control Unit insert 1515 U-12.
For Busch-Alarm signal insert 1563 U-12.
For indication lamp insert 1564 U-1x.
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1573 CN-84**	2CKA001582A0350	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] 6gang, illuminable, with labelling field

For signal panel insert 1566 U.
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1575 CN-84**	2CKA001582A0353	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

Cover plate [1] [2] with labelling field

For power supply insert 1518 U.
For relay insert 1539 U.
For signal generator insert 1561 U-....
With labelling field 61 x 61 mm.
Protection class (Device): IP 20
Dimensions: (L x W x D): 63.5 mm x 63.5 mm x 11.1 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1576 CN-84**	2CKA001582A0355	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Can also be used for Busch-axcent®, solo®, and carat®.

future® linear
Accessories

Extension of claws [1]

For the installation of flush-mounted SCHUKO® socket outlets and also switches, push-buttons, etc. and deeply installed flush-mounted boxes.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2148	2CKA002148A0120	100

[1] Not suitable for types 2000/3 US, 2000/6/2 US, 2000/6/6 US-101 and double socket outlets.

Braille symbol

Self-adhesive (transparent) for cover 2506-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	light		
	2144 LI	2CKA001714A0295	10/1000
	bell		
	2144 KI	2CKA001714A0296	10/1000
	key		
	2144 TR	2CKA001714A0297	10/1000

Braille symbol socket outlet

Self-adhesive, transparent for SCHUKO® socket outlets with hinged lid 20 EUK-xxx
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	2144 ST	2CKA001714A0298	10/1000

DIN A 4 labelling sheet [1] plastic foil

Suitable for all to be labeled Busch-Jaeger devices.
For laser printer.
The text of the foil is printed via the Busch-Jeager labeling service.
Dimensions: (L x W x D): 297 mm

Colour	Type	Order code	Pack/Qty.
translucent	**1799/02**	2CKA001799A0959	1
transparent	**1799/03**	2CKA001799A0960	1

[1] 1 piece = 1 sheet.

RC suppressor

For protection against the damage or destruction of electronic devices due to overvoltages.
For wiring network-interconnected inductivities (e.g.. relay, protection, fluorescent lamps, transformers, etc.).
Eliminates functional disturbances on electronic devices, e.g. automatic circuit reclosure (clocking) of a movement detector.
Dimensions: diameter 25 mm, length 35 mm, length of the connecting cable approx. 100 mm.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz

Colour	Type	Order code	Pack/Qty.
	6899	2CKA006899A0231	10

Surface-mounting box

Box for inserts and cover plates with cover frame.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1gang box		
anthracite	**1701-81**	2CKA001799A0895	10
ivory white	**1701-82**	2CKA001799A0896	10
aluminium silver [1]	**1701-83**	2CKA001799A0905	10
studio white	**1701-84-500**	2CKA001799A0982	10/100
studio white, matt [1]	**1701-884**	2CKA001799A0921	10
black matt [1]	**1701-885**	2CKA001799A0923	10
	2gang box		
anthracite	**1702-81**	2CKA001799A0900	10
ivory white	**1702-82**	2CKA001799A0901	10
aluminium silver [1]	**1702-83**	2CKA001799A0906	10
studio white	**1702-84**	2CKA001799A0902	10
studio white, matt [1]	**1702-884**	2CKA001799A0922	10
black matt [1]	**1702-885**	2CKA001799A0924	10
	3gang box		
anthracite	**1703-81**	2CKA001799A0915	1
ivory white	**1703-82**	2CKA001799A0916	1
aluminium silver [1]	**1703-83**	2CKA001799A0917	1
studio white	**1703-84**	2CKA001799A0918	1
studio white, matt [1]	**1703-884**	2CKA001799A0955	1
black matt [1]	**1703-885**	2CKA001799A0956	1

[1] Surface painted.

future® linear
Accessories

Cable entry for SM box

Suitable for 1701-8x and 1702-8x.
Trunking dimension: 15 x 15 mm to 19 x 19 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2087-81**	2CKA001761A1493	10
ivory white	**2087-82**	2CKA001761A1494	10
aluminium silver [1])	**2087-83**	2CKA001761A1504	10
studio white	**2087-84**	2CKA001761A1495	10

[1]) Surface painted.

Cable entry for SM box

Suitable for 1701-8x and 1702-8x.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**2088-81**	2CKA001761A1498	10
ivory white	**2088-82**	2CKA001761A1499	10
aluminium silver [1])	**2088-83**	2CKA001761A1505	10
studio white	**2088-84**	2CKA001761A1500	10

[1]) Surface painted.

Cover frames

future® linear Cover frame 1gang frame

With small corner radii for trunking systems.
Protection class (Device): IP 20
Dimensions: (L x W x D): 80 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**1721-181K**	2CKA001754A4240	10
ivory white	**1721-182K-500**	2CKA001754A4506	10/100
studio white	**1721-184K-500**	2CKA001754A4498	10/100
aluminium silver [1])	**1721-183K-500**	2CKA001754A4529	10/100
studio white, matt [1])	**1721-884K-500**	2CKA001754A4531	10/100
black matt [1])	**1721-885K-500**	2CKA001754A4532	10/100

[1]) Surface painted.

future® linear Cover frame 2gang frame

With small corner radii for trunking systems.
Protection class (Device): IP 20
Dimensions: (L x W x D): 151 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**1722-181K**	2CKA001754A4241	10
ivory white	**1722-182K**	2CKA001754A4231	10
aluminium silver [1])	**1722-183K-500**	2CKA001754A4530	10/100
studio white	**1722-184K-500**	2CKA001754A4499	10/100
studio white, matt [1])	**1722-884K**	2CKA001754A4415	10
black matt	**1722-885K-500**	2CKA001754A4534	10/100

[1]) Surface painted.

future® linear Cover frame 3gang frame

With small corner radii for trunking systems.
Protection class (Device): IP 20
Dimensions: (L x W x D): 222 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**1723-181K**	2CKA001754A4242	10
ivory white	**1723-182K**	2CKA001754A4232	10
aluminium silver [1])	**1723-183K-500**	2CKA001754A4533	10/100
studio white	**1723-184K-500**	2CKA001754A4502	10/100
studio white, matt [1])	**1723-884K**	2CKA001754A4416	10
black matt [1])	**1723-885K**	2CKA001754A4421	10/100

[1]) Surface painted.

future® linear
Cover frames

future® linear Cover frame 4gang frame

With small corner radii for trunking systems.
Protection class (Device): IP 20
Dimensions: (L x W x D): 293 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**1724-181K**	2CKA001754A4243	10
ivory white	**1724-182K**	2CKA001754A4233	10
aluminium silver [1])	**1724-183K**	2CKA001754A4309	10
studio white	**1724-184K**	2CKA001754A4238	10
studio white, matt [1])	**1724-884K**	2CKA001754A4417	10
black matt [1])	**1724-885K**	2CKA001754A4422	10

[1]) Surface painted.

future® linear Cover frame 5gang frame

With small corner radii for trunking systems.
Protection class (Device): IP 20
Dimensions: (L x W x D): 394 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**1725-181K**	2CKA001754A4244	1
ivory white	**1725-182K**	2CKA001754A4234	1
aluminium silver [1])	**1725-183K**	2CKA001754A4310	1
studio white	**1725-184K-500**	2CKA001754A4517	1
studio white, matt [1])	**1725-884K**	2CKA001754A4418	1
black matt [1])	**1725-885K**	2CKA001754A4423	1

[1]) Surface painted.

future® linear Cover frame 1gang frame

With small corner radii for trunking systems.
Protection class (Device): IP 20
Dimensions: (L x W x D): 80 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
red RAL 3020	**1721-12-182K-101**	2CKA001754A4713	10

future® linear Cover frame 2gang frame

With small corner radii for trunking systems.
Protection class (Device): IP 20
Dimensions: (L x W x D): 152 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
red RAL 3020	**1722-12-182K-101**	2CKA001754A4714	10

future® linear Cover frame [1]) 1gang frame

With labelling field and label holder.
With small corner radii for trunking systems.
Protection class (Device): IP 20
Dimensions: (L x W x D): 80 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1721-184 NSK-500**	2CKA001754A4527	10/100

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

future® linear Cover frame [1]) 3gang frame

With labelling field and label holder.
With small corner radii for trunking systems.
Vertical.
Protection class (Device): IP 20
Dimensions: (L x W x D): 222 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1723-184 NSK**	2CKA001754A4366	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

future® linear Cover frame [1]) 4gang frame

With labelling field and label holder.
With small corner radii for trunking systems.
Vertical.
Protection class (Device): IP 20
Dimensions: (L x W x D): 293 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1724-184 NSK**	2CKA001754A4367	1

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

future®
Cover frames

future® linear Cover frame [1]) 2gang frame

With labelling field and label holder.
With small corner radii for trunking systems.
Horizontal
Protection class (Device): IP 20
Dimensions: (L x W x D): 151 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1732-184 NSK**	2CKA001754A4368	10/100

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

future® linear Cover frame [1]) 3gang frame

With labelling field and label holder.
With small corner radii for trunking systems.
Horizontal
Protection class (Device): IP 20
Dimensions: (L x W x D): 222 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1733-184 NSK**	2CKA001754A4369	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

future® linear Cover frame [1]) 4gang frame

With labelling field and label holder.
With small corner radii for trunking systems.
Horizontal
Protection class (Device): IP 20
Dimensions: (L x W x D): 293 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
studio white	**1734-184 NSK**	2CKA001754A4370	1

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Cover frame [1]) 1gang frame

With rounded edges and corners.
Protection class (Device): IP 20
Dimensions: (L x W x D): 80 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
ivory white	**1721-182**	2CKA001754A4168	10/100
studio white	**1721-184-500**	2CKA001754A4504	10/100

[1]) Suitable for installation in trunking systems with 80 mm conduit.

Cover frame 2gang frame

For vertical or horizontal installation.
With rounded edges and corners.
Protection class (Device): IP 20
Dimensions: (L x W x D): 151 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
ivory white	**1722-182**	2CKA001754A4169	10/100
studio white	**1722-184-500**	2CKA001754A4508	10/100

Cover frame 3gang frame

For vertical or horizontal installation.
With rounded edges and corners.
Protection class (Device): IP 20
Dimensions: (L x W x D): 222 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
ivory white	**1723-182**	2CKA001754A4170	10/100
studio white	**1723-184**	2CKA001754A4175	10/100

Cover frame 4gang frame

For vertical or horizontal installation.
With rounded edges and corners.
Protection class (Device): IP 20
Dimensions: (L x W x D): 293 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
ivory white	**1724-182**	2CKA001754A4171	1
studio white	**1724-184**	2CKA001754A4176	1

Cover frame 5gang frame

For vertical or horizontal installation.
With rounded edges and corners.
Protection class (Device): IP 20
Dimensions: (L x W x D): 394 mm x 80 mm x 11 mm

Colour	Type	Order code	Pack/Qty.
ivory white	**1725-182**	2CKA001754A4172	1
studio white	**1725-184**	2CKA001754A4177	1

Notes

basic55®

One concept, numerous possibilities.

Those who design their living space wish to do it according to their own personal design concept. Which means that the colours must match the concept. And here basic55® convinces with two distinctive lines and several colour options. The available combinations of frames and rockers make it possible to adapt them harmoniously to all surroundings and individual style.

basic55® Waveline

—
01

—
02

—
03

—
04

—
05

—
06

—
07

—
08

—
01 basic55®, alpine white/ alpine white
—
02 basic55®, white/white
—
03 basic55®, coral / alpine white
—
04 basic55®, ocean/alpine white
—
05 basic55®, avocado/alpine white
—
06 basic55®, sun/alpine white
—
07 basic55®, oyster/alpine white
—
08 basic55®, purple/alpine white

basic55® Baseline

—
01

—
02

—
03

—
01 basic55®,
white/white
—
02 basic55®,
alpine white/
alpine white
—
03 basic55®,
château-black/
château-black

A shining example
Functional design

— Switches and push switches

— 01

— 02

— 03

— 04

— 05

— 06

— 07

— 08

— 09

— Socket outlets

— 10

— 11

— 12

— 13

— 14

— Blind switches

— 15

— 16

— 17

— 18

— 19

— Communication systems

— 20

— 21

— 22

— 23

— 24

— 25

— 26

— 27

— 28

— 29

—
01 Switch/button with rocker
—
02 2gang switch
—
03 2gang switch with neon lamp
—
04 3gang 1way switch
—
05 Push switch with doorbell symbol and labeling field
—
06 Rotary dimmer
—
07 Push switch with illumination
—
08 20 A DP switch with red neon indicator
—
09 Busch-Comfort switch®
—
10 SCHUKO® socket outlet, shuttered
—
11 SCHUKO® socket outlet and "DATA" marking
—
12 Socket outlet, shuttered with earthing pin
—
13 SCHUKO® socket outlet with hinged lid
—
14 SCHUKO® double socket outlet
—
15 Blind switches/push-buttons
—
16 Blind switches/push-buttons with rotary knob
—
17 Comfort timer
—
18 Card switch
—
19 Room temperature controller
—
20 SCHUKO® USB socket outlet, USB A&C
—
21 Antenna socket for TV
—
22 Antenna socket for Radio/TV/SAT
—
23 Light signal
—
24 Busch-powerDock
—
25 Loudspeaker outlet
—
26 USB power adapter insert, flush-mounted with USB-A & USB-C interface
—
27 Universal data connecting unit
—
28 Universal data connecting unit, 2gang
—
29 Loudspeaker

Cover plates for vertical or horizontal installation, available in 1gang to 5gang

—
01 basic55®, 1gang
—
02 basic55®, 2gang
—
03 basic55®, 3gang
—
04 basic55®, 4gang
—
05 basic55®, 5gang

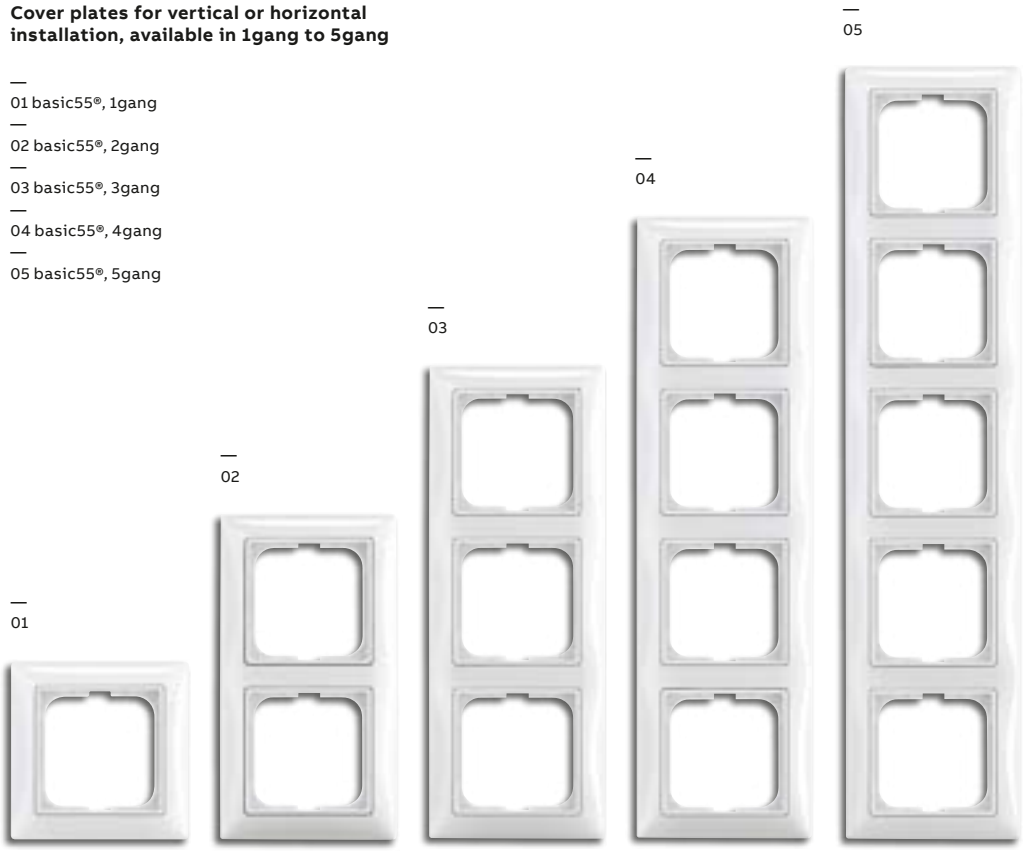

The wallpaper shown on pages 11, 13, 15, 17, 19, 21, 23 and 27 are part of the current range of the

MARBURGER TAPETENFABRIK
(Marburger wallpaper factory)

J. B. Schaefer GmbH & Co. KG
Bertram-Schaefer-Str. 11
35274 Kirchhain
Telephone: +49 (0) 6422 81-0
www.marburg.com

basic55®

Switches / push-buttons

Switch with rocker breaking circuit, 1-pole

Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2006/1 UC-92-507**	2CKA001012A2146	10/100
alpine white	**2006/1 UC-94-507**	2CKA001012A2139	10/100
château-black	**2006/1 UC-95-507**	2CKA001012A2174	10

Switch with rocker breaking circuit, 1-pole

With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2006/1 UCGL-92-507**	2CKA001012A2156	10/100
alpine white	**2006/1 UCGL-94-507**	2CKA001012A2153	10/100
château-black	**2006/1 UCGL-95-507**	2CKA001012A2175	10

Switch with rocker 1gang 2way

Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2006/6 UC-92-507**	2CKA001012A2149	10/100
alpine white	**2006/6 UC-94-507**	2CKA001012A2142	10/100
château-black	**2006/6 UC-95-507**	2CKA001012A2179	10/100

Switch with rocker 2gang 1way

Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2006/5 UC-92-507**	2CKA001012A2148	10/100
alpine white	**2006/5 UC-94-507**	2CKA001012A2141	10/100
château-black	**2006/5 UC-95-507**	2CKA001012A2177	10/100

Switch with rocker 2gang 1way

With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2006/5 UCGL-92-507**	2CKA001012A2157	10/100
alpine white	**2006/5 UCGL-94-507**	2CKA001012A2154	10/100
château-black	**2006/5 UCGL-95-507**	2CKA001012A2178	10

Switch with rocker 2gang 2way

Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2006/6/6 UC-92-507**	2CKA001012A2151	10
alpine white	**2006/6/6 UC-94-507**	2CKA001012A2144	10/100
château-black	**2006/6/6 UC-95-507**	2CKA001012A2181	10

Switch with rocker 3gang 1way, SP

Rated voltage: 250 V~
Rated current: 16 AXIEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**106/3/1 UC-92-507**	2CKA001012A2158	10/100
alpine white	**106/3/1 UC-94-507**	2CKA001012A2155	10/100
château-black	**106/3/1 UC-95-507**	2CKA001012A2173	10

Switch with rocker 1gang

Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2006/7 UC-92-507**	2CKA001012A2152	10
alpine white	**2006/7 UC-94-507**	2CKA001012A2145	10
château-black	**2006/7 UC-95-507**	2CKA001012A2182	10

basic55®

Switches / push-buttons

Switch with rocker 1gang DP

With neon lamp.
Rated voltage: 250 V~
Rated current: 20 A
Suitable for: LEDi / CFLi
Rated power: 250 W
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**1020/2 UCK-92-507**	2CKA001020A0090	1
alpine white	**1020/2 UCK-94-507**	2CKA001020A0089	1
château-black	**1020/2 UCK-95-507**	2CKA001020A0092	10

Switch with rocker [1] [2] 1gang 2way with N-terminal

With neon lamp.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2006/6 UCK-92-507**	2CKA001012A2150	10
alpine white	**2006/6 UCK-94-507**	2CKA001012A2143	10
château-black	**2006/6 UCK-95-507**	2CKA001012A2180	10

[1] With 1 mA neon lamp.
[2] Illuminable by using lamps 8360, 8362, 8363, 8365, 8366, and 8367 and LED inserts.

Push switch with rocker SP, with normally open contact (operating current)

With N terminal.
Rated voltage: 250 V~
Rated current: 10 AIEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2026 UC-92-507**	2CKA001413A1083	10/100
alpine white	**2026 UC-94-507**	2CKA001413A1080	10/100
château-black	**2026 UC-95-507**	2CKA001413A1095	10

Push switch with rocker with doorbell symbol and labeling field

SP (operating current),
With N terminal.
Secondary: 250 V-
Rated current: 10 AIEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2026 UCN/KL-92-507**	2CKA001413A1087	10/100
alpine white	**2026 UCN/KL-94-507**	2CKA001413A1086	10/100
château-black	**2026 UCN/KL-95-507**	2CKA001413A1097	10

Push switch with rocker and neutral symbol SP, with normally open contact (operating current)

With N terminal.
Rated voltage: 250 V~
Rated current: 10 AIEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2026 UCN-92-507**	2CKA001413A1084	10/100
alpine white	**2026 UCN-94-507**	2CKA001413A1081	10
château-black	**2026 UCN-95-507**	2CKA001413A1096	10

Card switch 10 A [1] SP, with normally open contact (operating current)



Illuminable.
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 20IEC60669-1, British Standard EN 60669-1

Colour	Type	Order code	Pack/Qty.
	2025 U	2CKA001012A1713	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
delivery form:	Adapter plate APBS to be ordered separate.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate [1]

For card switch.
For insert 2025 U.
Suitable for cards sized 54 x 86 mm.
The inner part of the cover plate is made of light-conducting plastic, so that the card slot is illuminated.

Colour	Type	Order code	Pack/Qty.
white	**1792-92-507**	2CKA001710A3865	10
alpine white	**1792-94-507**	2CKA001710A3864	10
château-black	**1792-95-507**	2CKA001710A3933	10

[1] Due to dimensions cover is suitable in cover frames without decorative styling frame only.

basic55®

Switches / push-buttons

Switch 2gang 1way with rocker, IP44

The IP44 protection level will achieved only if the device is mounted on a flat and napless wall.
With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 AX

Colour	Type	Order code	Pack/Qty.
white	**3521B-A05945 92**	2CHB210599A4092	10
alpine white	**3521B-A05945 94**	2CHB210599A4094	10
château-black	**3521B-A05945 95**	2CHB210599A4095	10

Switch 1gang 2way with rocker, IP44

The IP44 protection level will achieved only if the device is mounted on a flat and napless wall.
With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 AX

Colour	Type	Order code	Pack/Qty.
white	**3521B-A06945 92**	2CHB210699A4092	10
alpine white	**3521B-A06945 94**	2CHB210699A4094	10
château-black	**3521B-A06945 95**	2CHB210699A4095	10

Switch 1gang Intermediate with rocker, IP44

The IP44 protection level will achieved only if the device is mounted on a flat and napless wall.
With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 AX

Colour	Type	Order code	Pack/Qty.
white	**3521B-A07945 92**	2CHB210799A4092	10
alpine white	**3521B-A07945 94**	2CHB210799A4094	10
château-black	**3521B-A07945 95**	2CHB210799A4095	10

Switch 2gang 1way, with N-Terminal with rocker, IP44

The IP44 protection level will achieved only if the device is mounted on a flat and napless wall.
With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 AX

Colour	Type	Order code	Pack/Qty.
white	**3521B-A81945 92**	2CHB218199A4092	10
alpine white	**3521B-A81945 94**	2CHB218199A4094	10
château-black	**3521B-A81945 95**	2CHB218199A4095	10

Push Switch 1gang 2way with rocker, IP44

The IP44 protection level will achieved only if the device is mounted on a flat and napless wall.
With screwless terminals.
Rated voltage: 250 V~
Rated current: 10 A

Colour	Type	Order code	Pack/Qty.
white	**3521B-A89945 92**	2CHB218699A4092	10
alpine white	**3521B-A89945 94**	2CHB218699A4094	10
château-black	**3521B-A89945 95**	2CHB218699A4095	10

basic55®
Dimmers

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
UP, LED, 2-400 W

Very small installation depth: < 20 mm.
With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without cover plate. Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz Nominal power: 2 - 100 W/VA (leading edge control) Nominal power: 2 - 400 W/VA (trailing edge control)



Colour	Type	Order code	Pack/Qty.
	6523 UR-104-500	2CKA006512A0354	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9]
Flush-mounted, LED, 2-100 W

With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
Via mode switch adjustable between leading edge control and trailing edge control.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With adjustable minimum brightness.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10%
Rated frequency: 50 Hz/60 Hz
Nominal power: 2 - 100 W/VA (retrofit LED loads).
Nominal power: 10 - 250 W/VA (non-LED loads).
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6523 U-102-500	2CKA006512A0335	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

basic55®
Dimmers

Busch-rotary dimmer [1] [2] [3] [4] flush mounted, 1-10V

With rotary control.
For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control gears
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 700 W/VA
IEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	2112 U-101-500	2CKA006599A2873	1/10

[1] Non-illuminable.
[2] Use cover plates 2115 J-.../2115-.../6540-... .
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Making-current limiters have to be provided in case of too high making currents.

Busch-rotary dimmer [1]
Flush-mounted, DALI, tunable white

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE article no. 2116/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116 U	2CKA006599A3025	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1] Flush-mounted, DALI, with internal power supply, tunable white

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116/11 U	2CKA006599A3026	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

basic55®
Dimmers

Busch-rotary dimmer [1]) flush mounted, DALI

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved. Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
An additional DALI power supply is needed, e.g. by Tridonic, Philips, Helvar or 2117/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate. Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117 U-500	2CKA006599A2987	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1])
flush mounted, DALI, with internal power supply

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117/11 U-500	2CKA006599A2988	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Cover plate [1])
with rotary knob, with indication lamp

For Busch-Dimmer®.
For inserts
2112 U-101/2247 U/2250 U/6513 U-102/6517 U-10x/ 6519 U/6520 U/6523 U(R)(10x) /6591 U-10x and 6592 U.

Colour	Type	Order code	Pack/Qty.
white	**2115-92-507**	2CKA006599A2929	10
alpine white	**2115-94-507**	2CKA006599A2928	10
château-black	**2115-95-507**	2CKA006599A2991	10

[1]) Replacement neon lamp, Art. No. 3855.

basic55®
Dimmers

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6] FM, LED, 3-240 VA

2-wire connection (neutral conductor not required). Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA). Touch dimmer for switching lighting systems. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi). For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers. For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps. Mix operaton of LEDi with conventional loads possible. With manually adjustable operating mode: trailing / leading edge control. With adjustable minimum brightness. With light-level memory and minimum brightness memory. Low-noise level by MOSFET transistors. With electronic short-circuit protection. With electronic overload protection. Without control cover. For control element flex, 1gang, 64711. For control element flex, 2gang, 64721. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Rated power: 3-240 VA (LEDi). Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 1. Outputs: 1x dimming channel. Suitable for: 230 V LEDi, typical (leading edge control). Rated power: 3 - 100 VA. Suitable for: 230 V LEDi, typical (trailing edge control). Rated power: 3 - 240 W. Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer. Rated power: 10 - 240 VA.Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Buscah-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@ home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Flex control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 2 gang, flex wireless

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@ home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

basic55®
Dimmers

Rocker 1gang, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
white	SRD-1-92	2CKA006220A0639	1
alpine white	SRD-1-94	2CKA006220A0673	1
chateau-black	SRD-1-95	2CKA006220A0690	1

Rocker 2gang left, with “Dimmer” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
white	SRD-2-L-92	2CKA006220A0644	1
alpine white	SRD-2-L-94	2CKA006220A0678	1
chateau-black	SRD-2-L-95	2CKA006220A0695	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
white	SRS-2-R-92	2CKA006220A0647	1
alpine white	SRS-2-R-94	2CKA006220A0681	1
chateau-black	SRS-2-R-95	2CKA006220A0698	1

basic55®
ABB flexTronics inserts

Relay insert flex, 1gang [1])

3 wire connection (neutral conductor required).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 2300 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

basic55®

ABB flexTronics inserts

Relay insert flex, 2gang [1)]

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

e-contact insert flex, 1gang [1)] [2)]

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1)] Use only dimmable high-voltage LEDs.
[2)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

basic55®

ABB flexTronics inserts

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6] FM, LED, 3-240 VA

2-wire connection (neutral conductor not required).
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi).
Rated voltage: 230 V~, +10 % / -10 %.
Rated frequency: 50 Hz.
Inputs: 1.
Outputs: 1x dimming channel.
Suitable for: 230 V LEDi, typical (leading edge control).
Rated power: 3 - 100 VA.
Suitable for: 230 V LEDi, typical (trailing edge control).
Rated power: 3 - 240 W.
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm.
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Extension insert flex [1]

3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations.
For group control of flex inserts via extension unit communication.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Without control cover.
For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts.
Rated voltage: 230 V~, +10 % / -10 %.
Rated frequency: 50 Hz.
Control/Signal outputs: 1, electronic output, potential-bound.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm.
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

basic55®

ABB flexTronics comfort switch sensor

Comfort switch flex sensor [1) 2)]

Movement detector push-button switch combination.
For switching lighting systems that depend on brightness and movement. With select lens, prevents detection of smaller animal.
Push switch function possible at all times.
With notice LED when manual operation is necessary.
Extension of the detection range by main unit/ extension unit combination.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off.
Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off.
Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off.
With continuous light/continuous Off function.
Adjusting elements on rear side.
Surveillance density: 9 sectors with 28 switching segments.
Switch off delay: 1 to 10 min., adjustable.
Compatible with all ABB flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Display elements: LED for status display.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 5 m, lateral: 3 m, at mounting height: 1.1 m.
Detection angle: 170°.
Brightness limit value: 5 Lux - daytime operation
Operation mounting height: 0.8 m - 1.2 m.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 63 mm x 63 mm x 28 mm.
Above the wall: 21 mm.

Colour	Type	Order code	Pack/Qty.
white	**64765-92-507**	2CKA006800A2903	1
alpine white	**64765-94-507**	2CKA006800A2905	1
château-black	**64765-95-507**	2CKA006800A2906	1

[1)] The range specifications refer only to an ambient temperature of 21°C.
[2)] Please order the respective flush-mounted insert separately.

Busch-Watchdog 180 flex, basic sensor [1) 2)] with select-lens

Movement detector sensor with with measurement of ambient light.
For automatic switching of devices dependent on motion and brightness.
Compatible with all free@home flex inserts.
Adjusting elements on rear side.
Extension of the detection range by means of master/ slave combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
With detection display in test mode.
Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
Mounting height: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m.
Detection angle: 180 °.
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation.
Mounting height: 0.8 m - 1.2 m.
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 56 mm x 56 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
white	**64761-92-507**	2CKA006800A2941	1
alpine white	**64761-94-507**	2CKA006800A2943	1
château-black	**64761-95-507**	2CKA006800A2944	1

[1)] Please order the respective flush-mounted insert separately.
[2)] The range specifications refer only to an ambient temperature of 21°C.
[3)] Surface painted.

basic55®

ABB flexTronics movement detector sensors

Busch-Watchdog 180 flex, comfort sensor [1] [2] with select-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With continuous light/continuous Off function.
With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U.
For e-contact insert flex, 1gang, 64814 U.
For series relay insert flex, 2gang, 64821 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
Mounting height: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m
Detection angle: 180 °
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation
Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 55 mm x 55 mm x 35 m

Colour	Type	Order code	Pack/Qty.
white	**64762-92-507**	2CKA006800A2978	1
alpine white	**64762-94-507**	2CKA006800A2980	1
château-black	**64762-95-507**	2CKA006800A2981	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with select-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. ./. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 22 mm.

Colour	Type	Order code	Pack/Qty.
white	**62762-92-WL-507**	2CKA006200A0186	1
alpine white	**62762-94-WL-507**	2CKA006200A0188	1
château-black	**62762-95-WL-507**	2CKA006200A0189	1

Busch-Watchdog 180 flex, comfort sensor [1] [2] with multi-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. With continuous light/continuous Off function. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 31 mm. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Detection range: frontal: 8 m, lateral: 7 m, Mounting height: 1.1 m. Detection range 2: frontal: 8 m, lateral: 8 m, Mounting height: 2.2 m
Detection angle: 180 °. Brightness limit value: 5 Lux - 500 Lux Up to daytime operation
Mounting height: 0.8 m - 1.2 m alternative: 2.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 55 mm x 55 mm x 45 mm

Colour	Type	Order code	Pack/Qty.
white	**64764-92-507**	2CKA006800A3015	1
alpine white	**64764-94-507**	2CKA006800A3017	1
château-black	**64764-95-507**	2CKA006800A3018	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with multi-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U.

Colour	Type	Order code	Pack/Qty.
white	**62764-92-WL-507**	2CKA006200A0254	1
alpine white	**62764-94-WL-507**	2CKA006200A0256	1
château-black	**62764-95-WL-507**	2CKA006200A0257	1

basic55®

Blind control / timers

Blind switch with cover [1] SP, switch

With interlock.
Rated voltage: 250 V~
Rated current: 10 AXIEC60669-1

Colour	Type	Order code	Pack/Qty.
white	**2006/4 UC-92-507**	2CKA001012A2147	10
alpine white	**2006/4 UC-94-507**	2CKA001012A2140	10
château-black	**2006/4 UC-95-507**	2CKA001012A2176	10

[1] These blind switches/push buttons safely prevent a switch-over of the running direction being carried out too quickly.

Blind switch with cover [1] SP, push switch

With interlock.
Rated voltage: 250 V~
Rated current: 10 AIEC60669-1

Colour	Type	Order code	Pack/Qty.
white	**2026/4 UC-92-507**	2CKA001413A1085	10
alpine white	**2026/4 UC-94-507**	2CKA001413A1082	10
château-black	**2026/4 UC-95-507**	2CKA001413A1098	10

[1] These blind switches/push buttons safely prevent a switch-over of the running direction being carried out too quickly.

Blind switch with cover [1] [2] SP, N, E

With rotary knob/switch and push switch.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
IEC 60669-1

Colour	Type	Order code	Pack/Qty.
white	**2713 UCDR-92-507**	2CKA001101A0922	10
alpine white	**2713 UCDR-94-507**	2CKA001101A0920	10
château-black	**2713 UCDR-95-507**	2CKA001101A0928	10

[1] Blind switches/push switches prevents fast change over between operating directions.
[2] Also suitable for DC drives.

Blind switch with cover [1] [2] SP, N, E

With rotary knob/push button.
Rated voltage: 250 V~
Rated current: 10 AIEC60669-1

Colour	Type	Order code	Pack/Qty.
white	**2723 UCDR-92-507**	2CKA001101A0923	10
alpine white	**2723 UCDR-94-507**	2CKA001101A0921	10
château-black	**2723 UCDR-95-507**	2CKA001101A0929	10

[1] Blind switches/push switches prevents fast change over between operating directions.
[2] Also suitable for DC drives.

basic55®

Blind control / timers

Blind compact timer

Suitable for blind and roller blind drives with mechanical or electronic limit switch shut-off.
Without extension unit input.
Running time: 3 min
N-busbar connection is required.
For manual and time-controlled switching of blinds and roller blinds.
Memory function for the simple storage of switching times.
The controlled devices can be manually operated at any time.
Simple setting via display with with segment display and background illumination.
Factory pre-set switching times, individual adaptations are possible.
2 switching times per day can be freely adjusted for each day of the week.
Automatic switchover from summer time to winter time (switch-off function).
Switching times and programs are safely stored in the event of a mains power failure.
Power reserve for time and date > 10 years.
Simple toggling between manual/automatic/vacation modes.
See the associated cover plates 6435-xx.
Programming possible only with control element attached and energized.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 2x Normally open contact
Rated current: 3 A, cos ϕ 0.5
Rated power: 690 VA
Temperature range (Device): 0 °C to 45 °C

Colour	Type	Order code	Pack/Qty.
	6422 U-500	2CKA006410A0410	1/10

Cover plate

For room thermostats 1098 U-101 and 1098 UF-101.
For Busch-CO2 sensor 1091 U-500.

Colour	Type	Order code	Pack/Qty.
white	**6435-92-507**	2CKA006430A0353	10
champagne	**6435-93-507**	2CKA006430A0392	10
alpine white	**6435-94-507**	2CKA006430A0352	10
château-black	**6435-95-507**	2CKA006430A0393	10
chalet-white	**6435-96-507**	2CKA006430A0394	10

basic55®

Blind control / timers / CO_2 sensor

Busch-CO2 sensor [1])
For controlling the incoming fresh air in rooms by means of opening or switching of windows/fans

With display for carbon dioxide, humidity, temperature and air pressure.
Setting values: carbon dioxide 800 ppm - 1500 ppm, humidity 40% - 95%.
With 2 zero-potential relay contacts.
Nominal voltage: 230 V~
Nominal current: 6 A cos ϕ = 1
Without claw fixation.
To fit cover plate 6435-xxx.

Colour	Type	Order code	Pack/Qty.
	1091 U-500	2CKA001032A0518	1/10

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Socket outlets

SCHUKO® socket outlet [1])

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
white	**20 EUC-92-507**	2CKA002011A3857	10/100
alpine white	**20 EUC-94-507**	2CKA002011A3855	10/100
château-black	**20 EUC-95-507**	2CKA002011A6142	10/100

[1]) Terminals suitable for loop through connection.
[2]) Surface painted.

SCHUKO® socket outlet [1]) shuttered

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
white	**20 EUCKS-92-507**	2CKA002013A5279	10/100
alpine white	**20 EUCKS-94-507**	2CKA002013A5278	10/100
château-black	**20 EUCKS-95-507**	2CKA002013A5338	10

[1]) Increased shock protection .

SCHUKO® socket outlet [1]) with marking "DATA"

With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
white	**20 EUC/DV-92-507**	2CKA002011A3856	10
alpine white	**20 EUC/DV-94-507**	2CKA002011A3854	10
château-black	**20 EUC/DV-95-507**	2CKA002011A6143	10

[1]) Can only be used in SI frames with adapter 1746-....

basic55®

Socket outlets

SCHUKO® socket outlet with marking

With screwless terminals.
DP (2 P + E)
With continuous coloured marking of cover plate and base.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
red RAL 3020	**20 EUC-12-92-507-101**	2CKA002011A6252	10
Green, RAL 6032	**20 EUC-13-92-507-101**	2CKA002011A6261	10
orange RAL 2004	**20 EUC-14-92-507**	2CKA002011A6153	10

SCHUKO® socket outlet with hinged lid

With screwless terminals.
DP (2 P + E)
Hinged lid notches when opened.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
white	**20 EUK-92-507**	2CKA002018A0351	10/100
alpine white	**20 EUK-94-507**	2CKA002018A0350	10/100
château-black	**20 EUK-95-507**	2CKA002018A1499	10

Blind control / timers

Blind insert, 1 gang, 2 way flex

3 wire connection (neutral conductor required). For the control of roller shutters, blind and awning motors with mechanical or electronic limit switch shut-off. Group formation via extension input possible. Operation also via conventional push buttons (2020 US non-illuminated/2021/6 UK) possible. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL.

Colour	Type	Order code	Pack/Qty.
	64831 U-500	2CKA006400A0096	1

Extension insert flex

3 wire connection (neutral conductor required). For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts.

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

basic55®

Blind control / timers

Control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 1 gang, flex wireless

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads.
Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point.
Timer with Astro function.
For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx.
For saving and calling up 2 scenes via the right rocker.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Weather Station

For recording and transmitting of brightness, temperature, wind speed and rain.
Weather data can be linked with actuators to automatically control functions.
Weather data can be visualized in the free@home web interface and the free@home app. Remote operation via the Bluetooth and smartphone/tablet app.

Colour	Type	Order code	Pack/Qty.
	WS-1-WL.1	2CKA006200A0297	1

Standard Inputs

WS-1/A1.1 Mast adapter weather station

Colour	Type	Order code	Pack/Qty.
	WS-1/A1.1	2CKA006200A0848	1

Rocker 1gang, with “Blind” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
white	SRB-1-92	2CKA006220A0637	1
alpine white	SRB-1-94	2CKA006220A0671	1
chateau-black	SRB-1-95	2CKA006220A0688	1

Rocker 2gang left/right, “Blind” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
white	SRB-2-92	2CKA006220A0642	1
alpine white	SRB-2-94	2CKA006220A0676	1
chateau-black	SRB-2-95	2CKA006220A0693	1

Rocker 2gang right, with “Scene” icon

As cover for ABB-free@home® sensor units and sensor/actuator units

Colour	Type	Order code	Pack/Qty.
white	SRS-2-R-92	2CKA006220A0647	1
alpine white	SRS-2-R-94	2CKA006220A0681	1
chateau-black	SRS-2-R-95	2CKA006220A0698	1

basic55®
Socket outlets

SCHUKO® socket outlet with hinged lid

Shuttered.
With screwless terminals.
DP (2 P + E)
Hinged lid notches when opened.
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
white	**20 EUKB-92-507**	2CKA002111A0652	10
alpine white	**20 EUKB-94-507**	2CKA002111A0654	10
château-black	**20 EUKB-95-507**	2CKA002111A0655	10

SCHUKO® socket outlet with hinged lid

Delivered with special frame for IP44 protection level
The IP44 protection level will achieved only if the device is mounted on a flat and napless wall.
With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
white	**20 EUCKD-92-507**	2CKA002018A1504	10/100
alpine white	**20 EUCKD-94-507**	2CKA002018A1505	10/100
château-black	**20 EUCKD-95-507**	2CKA002018A1502	10/100

Single socket outlet with lid, shuttered, IP44

The IP44 protection level will achieved only if the device is mounted on a flat and napless wall.
With screwless terminals.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
white	**6619B-A06999 92**	2CHB196999A6092	10
alpine white	**6619B-A06999 94**	2CHB196999A6094	10
château-black	**6619B-A06999 95**	2CHB196999A6095	10

Socket outlet [1]) with earth pin

With screwless terminals.
Suitable for the countries: Belgium, Poland, Czech Republic.
DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
	20 M-500	2CKA002017A0854	10/100

[1]) Insert can be used for all covers 2399 UCKS-xx.

Cover plate shuttered

For socket outlet insert 20 M-500.

Colour	Type	Order code	Pack/Qty.
white	**2399 UCKS-92-507**	2CKA002099A0251	10
alpine white	**2399 UCKS-94-507**	2CKA002099A0250	10
château-black	**2399 UCKS-95-507**	2CKA002099A0260	10

Double SCHUKO® socket outlets [1]) [2])

Complete cover.
With screwless terminals.
DP (2 P + E)
Suitable for 1gang flush-mounted boxes.
Rated voltage: 250 V~, Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**202 EUJ-92**	2TKA00003903	10/100
alpine white	**202 EUJ-94**	2TKA00003904	10/100

[1]) Separat installation only possible.
[2]) With 2 x 2 terminals per pole.

Double SCHUKO® socket outlets [1]) [2])

Complete cover.
With screwless terminals.
DP (2 P + E)
Suitable for 1gang flush-mounted boxes.
Rated voltage: 250 V~, Rated current: 16 A
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**202 EUJ-92**	2TKA00003903	10/100
alpine white	**202 EUJ-94**	2TKA00003904	10/100

[1]) Separat installation only possible.
[2]) With 2 x 2 terminals per pole.

SCHUKO® socket outlet [1]) [2]) with screw-type terminals

DP (2 P + E)
Rated voltage: 250 V~
Rated current: 16 A

Colour	Type	Order code	Pack/Qty.
ivory	**2300 EUC-92-507**	2CKA002011A6154	10
alpine white	**2300 EUC-94-507**	2CKA002011A6155	10
château-black	**2300 EUC-95-507**	2CKA002011A6147	10

[1]) Terminals suitable for loop through connection.
[2]) With screw-type terminals

basic55®

Socket outlets

SCHUKO® USB socket outlet, 2gang [1] [2] [3] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the SCHUKO® socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
white	**20 EUCB2USBAC-92-507**	2CKA002011A6325	1/10
alpine white	**20 EUCB2USBAC-94-507**	2CKA002011A6326	1/10
château-black	**20 EUCB2USBAC-95-507**	2CKA002011A6327	1/10
white matt	**20 EUCB2USBAC-97-507**	2CKA002011A6329	1

[1] Increased shock protection .
[2] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[3] No data transfer.

USB socket outlet earthing pin, 2gang [1] [2] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the pin earth socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
white	**20 MUCB2USBAC-92-507**	2CKA002017A1921	1/10
alpine white	**20 MUCB2USBAC-94-507**	2CKA002017A1922	1/10
château-black	**20 MUCB2USBAC-95-507**	2CKA002017A1923	1/10

[1] Increased shock protection.
[2] No data transfer.

basic55®

Data communication

Universal data connection unit, cat. 3 [1]) 1gang

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0213-507	2CKA000230A0378	1/10

[1]) Suitable for cover plate 1803-xxx.

Universal data connection unit, RJ45, Cat. 6e, unshielded, with down-leading outlet [1]) 1gang

With down-leading outlet and LSA self-cutting clamps.
Cat. 6 according to DIN EN 50173-1:2003-06, ISO/IEC 1180:2002, and TIA/EIA-568-B.2:2002.
Marking in accordance with EIA/TIA 568 A and B.
Design according to IEC 60 603-7-2:2007.
Up to 250 MHz on all pairs of wires.
Suitable for Gigabit Ethernet.
With claw.
Suitable for RJ 11, RJ 12 und RJ 45.

Colour	Type	Order code	Pack/Qty.
	0220-507-101	2CKA000230A0469	10

[1]) Suitable for cover plate 1803-xxx.

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 1gang

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without claws.
Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**0218/11-101-507**	2CKA000230A0410	1/10

[1]) Suitable for cover plate 1803-xxx.

Universal data connection unit, RJ45, Cat. 6e, unshielded, with down-leading outlet [1]) 1gang

With down-leading outlet and LSA self-cutting clamps.
Cat. 6 according to DIN EN 50173-1:2003-06, ISO/IEC 1180:2002, and TIA/EIA-568-B.2:2002.
Cat. 6a (Category 6 augmented) in accordance with TIA/EIA-568-B.2-10 Draft 8.0.
Marking in accordance with EIA/TIA 568 A and B.
Design according to IEC 60 603-7-2:2007.
Up to 250 MHz on all pairs of wires.
Suitable for Gigabit Ethernet. With claw.

Colour	Type	Order code	Pack/Qty.
	0221-507	2CKA000230A0399	10

[1]) Suitable for cover plate 1803-xxx.

Modular-Jack insert Cat. 6 non-shielded, 8 (8)-pole

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).

Colour	Type	Order code	Pack/Qty.
	0209-507	2CKA000225A0154	1/10

Universal data connection box with down-leading outlet [1]) 2gang internally parallel connected

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0214	2CKA000230A0235	10/100
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

Universal data connection box with down-leading outlet [1]) 2 x outlets, 8/8-pole

With down-leading outlet.
For 8-pole plug, RJ 11/12, RJ 45, ISDN capability, Cat. 3.
Design according to IEC 60 603-7-2:2007.
Screw contacts
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0215	2CKA000230A0243	10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Suitable for cover plate 1803-02-xxx.

basic55®

Data communication

Data-connection box, RJ 45, cat. 6a iso, shielded [1]) 2 x outlets, 8/8-pole

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For trunk systems, flush-mounted wall boxes and underfloor systems. For wires of AWG 24-22.
Without claws. Mounting depth: 31 mm.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**0218/12-101-507**	2CKA000230A0412	1/10

[1]) Suitable for cover plate 1803-02-xxx.

Universal data connection unit, RJ45, Cat. 6e, unshielded, with down-leading outlet [1]) 2 x outlets, 8/8-pole

With down-leading outlet and LSA self-cutting clamps.
Cat. 6 according to DIN EN 50173-1:2003-06, ISO/IEC 1180:2002, and TIA/EIA-568-B.2:2002.
Cat. 6a (Category 6 augmented) in accordance with TIA/EIA-TR 42.7.
Marking in accordance with EIA/TIA 568 A and B.
Design according to IEC 60 603-7-2:2007.
Up to 250 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet. With claw.

Colour	Type	Order code	Pack/Qty.
	0221/12-507	2CKA000230A0400	10

[1]) Suitable for cover plate 1803-02-xxx.

Flush-mounted assembly adapter

For the accommodation of one or two universal modules 0219.
For flush-mounted installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/12	2CKA000230A0395	1/10

Channel assembly adapter

For the accommodation of one or two universal modules 0219. For channel and under-floor installation.
Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0219/13	2CKA000230A0396	1/10

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0248/02-101**	2CKA000230A0402	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**0248/05-101**	2CKA000230A0404	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

USB connection unit [1]) with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link mobile devices like e.g. printer, scanner, USB-sticks or digital cameras etc.
USB-type A, USB 2.0 compatible.
For 5-wire USB- cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/11-500**	2CKA000230A0418	1

[1]) Please follow the recommendations of the cable and device producers for the max. USB cable lengths.

basic55®

Data communication

VGA connection unit [1])
with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link analogue video data between PCs and laptops to monitors or digital projectors etc.
VGA-type: D-type, 15-pole. Fully HD ready (1920 x 1080 pixel). For 15-wire VGA-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems. For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended. Without cover plate. Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/21-500**	2CKA000230A0424	1

[1]) Please follow the recommendations of the cable and device producers for the max. VGA cable lengths.

HDMI connection unit [1])
with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To link high-definition digital audio and video data from e.g. SAT-receiver, DVD-/ Blue-Ray-player to plasma-type, LCD- or-LED-TVs/ screens. HDMI-type A, 3D-compatible. Fully HD ready (1920 x 1080 pixel). For 20-wire HDMI-cables via srew-type terminals. For trunk systems, flush-mounted wall boxes and underfloor systems. For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended. Without cover plate. Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/31-500**	2CKA000230A0430	1

[1]) Please follow the recommendations of the cable and device producers for the max. HDMI cable lengths.

TV outlet

For connection to a TV or FM co-axial aerial lead.
Rated frequency: 5000 Hz - 860000 HzIEC 60169-2

Colour	Type	Order code	Pack/Qty.
alpine white	**1743-01-94-507**	2CKA001724A4276	10/100
château-black	**1743-01-95-507**	2CKA001724A4313	10

Satellite co-axial outlets 2 connectors/dead-end feeder

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0230-101-507	2CKA000230A0380	10/100

Antenna socket insert Radio/TV
2 connectors/loop through type

Broadband technology 5-2.400 MHz
For DVB-T, satellite and broad-band cable systems.
For analogue and digital transmission.
With claw.
Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0231-101	2CKA000230A0268	10/100

Satellite co-axial outlets Radio/TV/SAT
3gang dead-end feeder

Broadband technology 47-2.150 MHz.
SAT connection designed as screwable F-male plug.
with remote feed via F-bush. For DVB-T and broadband-cable-systems. For analogue and digital transmission.
With claw. Minimal installation depth, class A.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0232-101-500	2CKA000230A0463	10/100

Terminating resistor 75 Ohm

Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0239	2CKA000230A0201	10/100

Modular-Jack insert Cat. 5e non-shielded, 8 (8)-pole

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).

Colour	Type	Order code	Pack/Qty.
	0211/11-507	2CKA000225A0153	1/10

Modular-Jack insert 6-pole Cat. 3 (AMP-No. 216000-2)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0210	2CKA000225A0078	10

basic55®

Data communication

Modular-Jack insert 8-pole Cat. 3 (AMP-No. 216005-4)

For cover plate 2561-xxx, 2561-02-xxx and insert 1812, 1866 built-in, 1867 built-in.
For conductor cross-sections of 0.12 mm² (AWG 26) to 0.35 mm² (AWG 22).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	0211	2CKA000225A0086	10

Universal module, RJ 45, cat. 6a iso, shielded [1] 1gang

For installation in installation adapter 0219/12 or 0219/13.
Also suited for mounting into cover plate 2561-xxx, 2564-02-xxx and bases 1812, 1866 EB, and 1867 EB.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Cat. 6A according to ISO/IEC 11801: 2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01. Shielding according to DIN EN 55022, Class B. Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Bend-radius optimised cable feed (30°).
Earthing of housing via 6,3 mm blade terminal at the back possible. Re-embedded proofed.
Suitable for Mix-and-Match operation.
For 8-pole plug RJ 45 only. Housing made from diecast zinc. With integrated dust-protection cap (can be removed if necessary). With insulation displacement connection. For data cables with a diameter of 6 -10 mm. For wires of AWG 24-22.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**0219-101-507**	2CKA000230A0414	1/10

[1] With assembly adapters appropriate for telephone unit cover plates 2539-21x and 1766-xxx.

Mounting plate [1] [2] with green insert



For 2 modular jack inserts.
For systems: CommScope (AVAYA / AT&T / Lucent Technologies), GigaSPEED, PowerSUM, 360 GS 10E bis MGS 600-BK, M1 BH-xx, MPS 100E-xx.
With R&M adapter R310694 suitable for R&M connection modules R305111, R305112, R305113 and R305114.
Pitch dimensions: (WxH) approx. 16.9 x 17.9 mm.
Without claws. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1810-500	2CKA001753A9974	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with red insert



For 2 modular jack inserts.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
For systems: AMP / tyco Electronics, BTR, EFB, Krone, Panduit, Quante, Radiall, Setec, Dr.-Ing. Sieger, Telena, Thomas & Betts
For Telegärtner AMJ/UMJ connection modules/ couplings.
For 2 fiber optic modules of the following types: 3M-Volition, Krone, mvk.
Pitch dimensions: (WxH) approx. 14.8 x 19.4 mm.
Without claws. Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1812-500	2CKA001753A9972	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with black insert

For MTRJ or 2 modular jack inserts.
For systems: Ackermann, AMP / tyco Electronics (Slim Line (SL) -SM 2gang/switches: 110Connect Jacks, Toolless Jacks / Standard 110Connect Jacks), Brand-Rex, CombiNet, EFB Electronic, Telena.
For 2 fiber optic modules of the following types: AMP / tyco Electronics MTRJ.
Pitch dimensions: (WxH) approx. 14.8 x 20.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1814-500	2CKA001753A9973	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with orange base

For 2 modular jack inserts.
For system: LexCom 150 and LexCom 250.
Pitch dimensions: (WxH) approx. 15.4 x 15.4 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1819	2CKA001753A8056	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

Mounting plate [1] [2] with grey base

For 2 modular jack inserts.
For system: Panduit MiniCom (Cu. z.B. TX6 10 Gig Shielded Jack modules and fiber optic modules.
Pitch dimensions: (WxH) approx. 15.9 x 18.7 mm.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1820	2CKA001753A8057	10/100

[1] Compatibility with other manufacturers not listed is to be checked in accordance with specified snap-in dimensions.
[2] For further information, please refer on the Internet.

basic55®

Data communication

Cover plate 1gang

As cover for universal data connection boxes.
Art.-No. 0213 (Cat 3/ISDN), 0216-101, 0218/11-101 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
Brand-Rex (WAEGV 8 EKR/EK).
BTR (universal data connecting unit design and IAE design).
Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.

Colour	Type	Order code	Pack/Qty.
white	**1803-92-507**	2CKA001753A0098	10/100
alpine white	**1803-94-507**	2CKA001753A0096	10/100
château-black	**1803-95-507**	2CKA001753A0207	10

Cover plate 2gang

As cover for universal data connection boxes.
Art. No. 0214, 0215 (Cat 3), 0220/12-507, 0221/12-507, 0218, 0217 (Cat 5e/6 data technology) and comparable types of the company Rutenbeck.
Brand-Rex (WAEGV 8/8 EKR/EK).
AMP (NETCONNECT 5E).
BTR (E-DAT C6, E-DAT design, Universal data connecting unit design and IAE design).
cti (cti-wire 2.8 Cat.6).
Telegärtner (AMJ 45, UMJ 45).
With down-leading outlet.

Colour	Type	Order code	Pack/Qty.
white	**1803-02-92-507**	2CKA001753A0097	10/100
alpine white	**1803-02-94-507**	2CKA001753A0095	10/100
château-black	**1803-02-95-507**	2CKA001753A0206	10

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter.
USB power adapter insert 6475 U-500.
For loudspeaker connection box.
Suitable for part number 0248/0x-101.
For data modules.
Suitable for Art. No. 0219/12 and 0219/13.
For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**2539-92-507**	2CKA001724A4279	10
alpine white	**2539-94-507**	2CKA001724A4275	10/100
château-black	**2539-95-507**	2CKA001724A4315	10

Cover plate adapter ring

For telecommunication inserts with cover plate 50 x 50 mm.
With cover plate 50 x 50 mm, AMP, Brand-Rex, Rutenbeck, BTR, Telegärtner, etc.

Colour	Type	Order code	Pack/Qty.
white	**1746-92-507**	2CKA001726A0221	10
alpine white	**1746-94-507**	2CKA001726A0219	10
château-black	**1746-95-507**	2CKA001726A0231	10

Cover plate
as cover for standard Radio/TV/SAT socket outlets

With 3 connectors.
Radio/TV/SAT.
With M3 fixing screw.

Colour	Type	Order code	Pack/Qty.
white	**1743-92-507**	2CKA001724A4284	10/100
alpine white	**1743-94-507**	2CKA001724A4283	10/100
château-black	**1743-95-507**	2CKA001724A4314	10

Cover plate [1]) with metal mounting plate

As cover for flex outlet, for cords up to 10.3 mm diameter.
With strain relief (without terminal block).

Colour	Type	Order code	Pack/Qty.
white	**2527-92-507**	2CKA001710A3773	10
alpine white	**2527-94-507**	2CKA001710A3772	10
château-black	**2527-95-507**	2CKA001710A3936	10

[1]) Cover plate can also be used individually as cover for telephone connector boxes (VDo).

Blank plate

With metal mounting plate

Colour	Type	Order code	Pack/Qty.
white	**2538-92-507**	2CKA001715A0313	10
alpine white	**2538-94-507**	2CKA001715A0312	10
château-black	**2538-95-507**	2CKA001715A0315	10

basic55®

Data communication

Cover plate with metal mounting plate

For 1 modular jack.
Suitable for Art. Nos. 0210, 0211 and 0219-101.
Without claws.

Colour	Type	Order code	Pack/Qty.
white	**2561-92-507**	2CKA001753A0211	10
alpine white	**2561-94-507**	2CKA001753A0213	10
château-black	**2561-95-507**	2CKA001753A0214	10

Cover plate [1]) with labelling field

For modular jack with slide entrance.
To fit only Art. No. 1810, 1812, 1814, 1816, 1818, 1819 and 1820.
Size of labelling field: 60 x 9 mm.

Colour	Type	Order code	Pack/Qty.
white	**1800-92-507**	2CKA001710A3944	10
alpine white	**1800-94-507**	2CKA001710A3945	10
château-black	**1800-95-507**	2CKA001710A3942	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Multimedia communication adapter

Busch-Radio DAB+ [1])

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Control/Signal outputs: 2, Loudspeaker output, impedance 4 Ohm
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8215 U-101-500	2CKA008200A0276	1/10

[1]) No claw. Screw-fixing via keyholes.

basic55®

Multimedia communication adapter

Busch-Radio BTconnect DAB+ [1])
With Bluetooth interface for music replay

DAB+ and RDS stereo radio alarm clock for flush-mounted installation.
With high-resolution colour display for showing additional information.
With Bluetooth interface for music replay of mobile devices.
Connection of external Bluetooth loudspeakers possible.
Reception frequency: 87.50 MHz - 108.00 MHz.
Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation.
8 radio stations storable.
With time and date display.
With individual alarm and snooze function.
With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Bluetooth specification: 4.2.
Bluetooth profiles supported: A2DP
Number of stored Bluetooth connections: max. 8
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Bluetooth

Colour	Type	Order code	Pack/Qty.
	8217 U-101-500	2CKA008200A0279	1/10

[1]) No claw. Screw-fixing via keyholes.

Loudspeaker insert [1]) 5 cm (2")

With flat plug connector.
With broadband characteristics.
Rated output: 2 W (RMS)
Incl. speaker connection cable.
Frequency response: 200 - 20,000 Hz
Impedance: 4 Ohm
Protection class (Device): IP 20, SELV
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1/10

[1]) No claw. Screw-fixing via keyholes.

USB power adapter insert, flush-mounted [1]) [2])
With USB-A & USB-C interface



For supply and support of mobile devices via USB-cable.
With USB type A and USB type C female connector.
To support two devices at the same time.
Supports automatic negotiating of optimum charging parameters for the shortest charging times.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz
Outputs: 2x USB charging interface
Suitable for: Only USB-A bus occupied:
Rated current: 3000 mA
Output voltage: 5 V-
Suitable for: Only USB-C bus occupied:
Rated power: 18 W
Suitable for: USB-A and USB-C bus occupied. Total:
Rated current: 3250 mA
Output voltage: 5 V-
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

[1]) No claw. Screw-fixing via keyholes.
[2]) No data transfer.

HDMI connection unit [1])
with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link high-definition digital audio and video data from e.g. SAT-receiver, DVD-/Blue-Ray-player to plasma-type, LCD- or-LED-TVs/screens.
HDMI-type A, 3D-compatible.
Fully HD ready (1920 x 1080 pixel).
For 20-wire HDMI-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/31-500**	2CKA000230A0430	1
grey	**0261/33-500**	2CKA000230A0432	1
alpine white	**0261/32-500**	2CKA000230A0431	1

[1]) Please follow the recommendations of the cable and device producers for the max. HDMI cable lengths.

basic55®

Multimedia communication adapter

VGA connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link analogue video data between PCs and laptops to monitors or digital projectors etc.
VGA-type: D-type, 15-pole.
Fully HD ready (1920 x 1080 pixel).
For 15-wire VGA-cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate.
Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/21-500**	2CKA000230A0424	1
grey	**0261/23-500**	2CKA000230A0426	1
alpine white	**0261/22-500**	2CKA000230A0425	1

[1] Please follow the recommendations of the cable and device producers for the max. VGA cable lengths.

USB connection unit [1] with screw-type terminals and strain relief

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To link mobile devices like e.g. printer, scanner, USB-sticks or digital cameras etc.
USB-type A, USB 2.0 compatible.
For 5-wire USB- cables via srew-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For easy mounting and adhering to the admissible bending radii, the Kaiser >Electronic socket<, article number 1068-02 or 9062-74, is recommended.
Without cover plate. Without claws.
Protection class (Device): IP 20
Mounting depth: 34 mm

Colour	Type	Order code	Pack/Qty.
white	**0261/11-500**	2CKA000230A0418	1
grey	**0261/13-500**	2CKA000230A0420	1
alpine white	**0261/12-500**	2CKA000230A0419	1

[1] Please follow the recommendations of the cable and device producers for the max. USB cable lengths.

Communication adapter for BNC-F Duct-jacks

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems. Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0262/11-500**	2CKA000230A0436	1
grey	**0262/13-500**	2CKA000230A0438	1
alpine white	**0262/12-500**	2CKA000230A0437	1

F duct-jack for communication adapter

For connection of antenna cables e.g.. for TVs with integrated TV-tuner and satellite receiver.
With screw-type terminals.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**0262-500**	2CKA000230A0440	1

Communication adapter for Cinch-jacks



Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx. To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0263/11-500**	2CKA000230A0444	1
grey	**0263/13-500**	2CKA000230A0446	1
alpine white	**0263/12-500**	2CKA000230A0445	1

basic55®

Multimedia communication adapter

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked white: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
alpine white	**0263/04-500**	2CKA000230A0451	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked black: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
black	**0263/05-500**	2CKA000230A0452	1

Cinch-jacks for communication adapter

To link analogue audio devices like audio-receiver, amplifier and HiFi-sets.
Audio-band 20Hz - 20kHz.
Marked red: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
Red	**0263/06-500**	2CKA000230A0453	1

Cinch-jacks for communication adapter

For connecting analogue video devices, such as DVD players, hard disc recorders, video recorders or receivers.
Marked yellow: audio , channel left.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
yellow	**0263/07-500**	2CKA000230A0454	1

Communication adapter for Mini-jacks 3,5mm

Suitable for telephone connection unit cover plates 2539-21x and 1766-xxx.
To support 1 or 2 jacks.
For trunk systems, flush-mounted wall boxes and underfloor systems.
Without cover plate.
Without claws.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0264/11-500**	2CKA000230A0458	1
grey	**0264/13-500**	2CKA000230A0460	1
alpine white	**0264/12-500**	2CKA000230A0459	1

Mini-jack 3,5 mm for communication adapter

For the connection of mobile terminal devices such as MP3 player (stereo), mobile telephone and smartphones.
Audio-band 20Hz - 20kHz.
With soldering tag.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
chrome gloss	**0264-500**	2CKA000230A0462	1

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**0248/02-101**	2CKA000230A0402	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Stereo loudspeaker connection box [1])

With screwless terminals (with screw-type terminals on the back). With 4 terminals.
Cable cross-section max. 10 mm2.
Polarity is indicated by color.
With claw.
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
anthracite	**0248/05-101**	2CKA000230A0404	10/100

[1]) Suitable for cover telephone unit 1766-xxx and 2539-21x.

Cover plate

For Busch-Radio DAB+ 8215 U-101.
For Busch-Radio BTconnect DAB+ 8217 U-101.
For Busch-Radio iNet 8216 U.

Colour	Type	Order code	Pack/Qty.
white	**8252-92-101-507**	2CKA008200A0270	10
alpine white	**8252-94-101-507**	2CKA008200A0272	10
château-black	**8252-95-101-507**	2CKA008200A0273	10

[1]) Surface painted.

basic55®

Multimedia communication adapter

Cover plate

For loudspeaker insert 8223 U.

Colour	Type	Order code	Pack/Qty.
white	**8253-92-507**	2CKA008200A0167	1/10
alpine white	**8253-94-507**	2CKA008200A0170	1/10
château-black	**8253-95-507**	2CKA008200A0161	1/10

Cover plate

For telephone connection unit.
For USB, VGA, HDMI inserts and communication adapter.
USB power adapter insert 6475 U-500.
For loudspeaker connection box.
Suitable for part number 0248/0x-101.
For data modules.
Suitable for Art. No. 0219/12 and 0219/13.
For modular outlets with 90° RJ45 outlet from Telegärtner (type MJ and WE).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
white	**2539-92-507**	2CKA001724A4279	10
alpine white	**2539-94-507**	2CKA001724A4275	10/100
château-black	**2539-95-507**	2CKA001724A4315	10

Cover plate for Busch-powerDock

For Busch-powerDock charging cradle.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
white	**6477-92-507**	2CKA006400A0050	10
alpine white	**6477-94-507**	2CKA006400A0052	10
château-black	**6477-95-507**	2CKA006400A0054	10

[1] Surface painted.

Room thermostats

Room thermostat, flush-mounted [1] [2] [3]

END OF LIFE

Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0512	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] [3] Slide switch

END OF LIFE

With built-in slide switch and control lamp for nightly reduction of 4 K.
Switch contact opens when the set temperature is reached.
With fixing claws.
Separate terminal to activate nighttime mode and reduction of room temperature by 4K.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 10 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 U-500	2CKA001032A0514	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo-valves, "closed when de-energized", are necessary for connection to thermostat. e.g. Article No. 6164/10-, see KNX chapter.
[3] Switching temperature difference: ± 0.5 K.

basic55®
Room thermostats

Room thermostat, flush-mounted [1] [2] [3] 1gang 2way

END OF LIFE

With fixing claws.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~
Rated current: 5 A
Temperature range (Device): 5 °C to 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1097 U-101-500	2CKA001032A0513	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] Remote sensor

END OF LIFE

With remote sensor and thermal feedback. For underfloor heating. With built-in slide switch and control lamp for nightly reduction of 4 K. Switch contact opens when the set temperature is reached. With fixing claws. Remote sensor cable length: 4 m. Sensor =NTC, 10 kilo-ohm at 25 degrees C. Adjusting range: +10 to +50° C. Connecting cable: 1mm² to 2.5 mm². Separate terminal to activate nighttime mode and reduction of room temperature by 4K. Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~. Rated current: 16 A, cos ϕ 1 Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	1095 UF-507	2CKA001032A0498	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

RTC Room Temperature Controller

NEW

Room Temperature Controller for Room thermostat Bluetooth with Setpoint display, Timer and Remote control Button 230 V

Colour	Type	Order code	Pack/Qty.
	1095 UTA-BT-500	2CKA001032A0534 Insert - Bluetooth	1
	1094 USITA-BT-500	2CKA001032A0536 Insert - Bluetooth	1
	1096 UTA-BT-500	2CKA001032A0538 Insert - Bluetooth	1
	1099 UHKTA-BT-500	2CKA001032A0540 Insert - Bluetooth	1
	62841 U-WL-500	2CKA006800A3115 Insert - free@home	1
	62842 U-WL-500	2CKA006800A3117 Insert - free@home	1
	62843 U-WL-500	2CKA006800A3119 Insert - free@home	1

Room Thermostat

NEW

Electronic room thermostat, open contact, fm
Normally open contact, non-isolated
Switch contact opens when the set temperature is reached. Without fixing claws.
Separate terminal to activate eco mode to reduce the room temperature by 3K. See respective cover plates 1794 R-xx. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Power dissipation: ≤ 0,15 W
Rated current: 10 A. Temperature range (device): 5 °C - 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm. Protection class device: IP 20
Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete. Servo-valves, "de-energised open", are necessary for connection to thermostat. e.g. Article No. 6164/10-102. Switching temperature difference: ± 0.5 K

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0525	1/10
	1097 U-101-500	2CKA001032A0528	1/10
	1099 UHK-101-500	2CKA001032A0531	1/10

Room thermostat, flush-mounted [1] [2] [3] Change-over contact, setpoint indication, timer

END OF LIFE

With change-over contact. Easy adjustment using menu and text-based display. 4 switching times per day can be user-defined for each day of the week. With fixing claws. Automatic summer/wintertime switch-over
Power reserve > 10 hours. To fit cover plate 6435-xxx. Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~. Rated current: 10 A. Temperature range (Device): 5 °C to 30 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 U-101	2CKA001032A0508	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.
[3] Switching temperature difference: ± 0.5 K.

Room thermostat, flush-mounted [1] [2] Change-over contact, setpoint indication, timer, remote sensor

END OF LIFE

With change-over contact. Easy adjustment using menu and text-based display. 4 switching times per day can be user-defined for each day of the week.
With fixing claws. Automatic summer/wintertime switch-over. Remote sensor cable length: 4 m.
Sensor =NTC, 10 kilo-ohm at 25 degrees C.
Power reserve > 10 hours. To fit cover plate 6435-xxx.
Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Rated voltage: 230 V~
Rated current: 16 A. Temperature range (Device): 10 °C to 50 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 52 mmEN 60730-2-9

Colour	Type	Order code	Pack/Qty.
	1098 UF-101	2CKA001032A0509	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[2] Servo valves of "closed or open when de-energized" design are required for the controller. E.g. article no. 6164/10-101.

basic55®

Room thermostats

Cover plate for room thermostat

For room thermostats 1094 U, 1097 U.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
white	**1794-92-507**	2CKA001710A3868	10
alpine white	**1794-94-507**	2CKA001710A3866	10
château-black	**1794-95-507**	2CKA001710A3934	10

Cover plate for room thermostat

With sliding switch for nightly room temperature reduction. to activate nighttime mode and reduction of room temperature by 4K, for thermostats 1095 U, 1096 U and 1095 UF.

END OF LIFE

Colour	Type	Order code	Pack/Qty.
white	**1795-92-507**	2CKA001710A3869	10
alpine white	**1795-94-507**	2CKA001710A3867	10
château-black	**1795-95-507**	2CKA001710A3935	10

Cover Plate Thermostat Turn button

NEW

C-plate for room thermostats 1094 U-101 1097 U-101 1099 U-101.

Colour	Type	Order code	Pack/Qty.
white	**1794 R-92-507**	2CKA001710A4195	10
alpine white	**1794 R-94-507**	2CKA001710A4196	10
château-black	**1794 R-95-507**	2CKA001710A4197	10

Cover Plate, Thermostat Various symbols for Thermostat anthracite - Platform 63

NEW

Central plate with print for room temperature controller with display/Bluetooth or free@home wireless
For room temperature controller with display:
1094 USITA-BT - 1095 UTA-BT - 1096 UTA-BT -
1099 UHKTA-BT - 62841 U-WL - 62842 U-WL - 62843 U-W

Colour	Type	Order code	Pack/Qty.
white	**1794 MDRT-92-507**	2CKA006430A0414	
alpine white	**1794 MDRT-94-507**	2CKA006430A0415	
château-black	**1794 MDRT-95-507**	2CKA006430A0416	

Accessories

Surface-mounting box
1gang box
Box for inserts and cover plates with cover frame.

Colour	Type	Order code	Pack/Qty.
white	**1701-92-507**	2CKA001799A0971	10
alpine white	**1701-94-507**	2CKA001799A0974	10
château-black	**1701-95-507**	2CKA001799A0965	10

Surface-mounting box
2gang box
Box for inserts and cover plates with cover frame.

Colour	Type	Order code	Pack/Qty.
white	**1702-92-507**	2CKA001799A0972	1
alpine white	**1702-94-507**	2CKA001799A0975	1
château-black	**1702-95-507**	2CKA001799A0966	1

Surface-mounting box
3gang box
Box for inserts and cover plates with cover frame.

Colour	Type	Order code	Pack/Qty.
white	**1703-92-507**	2CKA001799A0973	1
alpine white	**1703-94-507**	2CKA001799A0976	1
château-black	**1703-95-507**	2CKA001799A0967	1

basic55®
Cover frames

Cover frame with decorative styling frame 1gang frame

Dimensions: (L x W x D): 84 mm

Colour	Type	Order code	Pack/Qty.
white	**2511-92-507**	2CKA001725A1484	10/100
alpine white	**2511-94-507**	2CKA001725A1479	10/100
château-black	**2511-95-507**	2CKA001725A1506	10/100

Cover frame with decorative styling frame 2gang frame

For vertical or horizontal installation.
Dimensions: (L x W x D): 155 mm

Colour	Type	Order code	Pack/Qty.
white	**2512-92-507**	2CKA001725A1485	10/100
alpine white	**2512-94-507**	2CKA001725A1480	10/100
château-black	**2512-95-507**	2CKA001725A1507	10/100

Cover frame with decorative styling frame 3gang frame

For vertical or horizontal installation.
Dimensions: (L x W x D): 226 mm

Colour	Type	Order code	Pack/Qty.
white	**2513-92-507**	2CKA001725A1486	10/100
alpine white	**2513-94-507**	2CKA001725A1481	10/100
château-black	**2513-95-507**	2CKA001725A1508	10/100

Cover frame with decorative styling frame 4gang frame

For vertical or horizontal installation.
Dimensions: (L x W x D): 297 mm

Colour	Type	Order code	Pack/Qty.
white	**2514-92-507**	2CKA001725A1487	10
alpine white	**2514-94-507**	2CKA001725A1482	10
château-black	**2514-95-507**	2CKA001725A1509	10

Cover frame with decorative styling frame 5gang frame

For vertical or horizontal installation.
Dimensions: (L x W x D): 368 mm

Colour	Type	Order code	Pack/Qty.
white	**2515-92-507**	2CKA001725A1488	10
alpine white	**2515-94-507**	2CKA001725A1483	10
château-black	**2515-95-507**	2CKA001725A1510	10

Decorative styling frame

For styling frames 2511-9x-507, 2512-9x-507, 2513-9x-507, 2514-9x-507, 2515-9x-507

Colour	Type	Order code	Pack/Qty.
white	**2516-92-507**	2CKA001726A0220	10/100
alpine white	**2516-94-507**	2CKA001726A0218	10/100
château-black	**2516-95-507**	2CKA001726A0232	10/100

basic55®
Cover frames

Colourd cover frame 1gang

Dimensions: (L x W x D): 84 mm

Colour	Type	Order code	Pack/Qty.
white	**2511-922-507**	2CKA001725A1399	10/100
alpine white	**2511-944-507**	2CKA001725A1398	10/100
coral	**2511-947-507**	2CHP471725A1479	10/100
sun	**2511-945-507**	2CHP451725A1479	10/100
ocean	**2511-948-507**	2CHP481725A1479	10/100
oyster	**2511-949-507**	2CHP491725A1479	10/100
avocado	**2511-946-507**	2CHP461725A1479	10/100
purple	**2511-943-507**	2CHP431725A1479	10/100

Colourd cover frame 2gang

Dimensions: (L x W x D): 84 mm

Colour	Type	Order code	Pack/Qty.
white	**2512-922-507**	2CKA001725A1402	10/100
alpine white	**2512-944-507**	2CKA001725A1401	10/100
coral	**2512-947-507**	2CHP471725A1480	10/100
sun	**2512-945-507**	2CHP451725A1480	10/100
ocean	**2512-948-507**	2CHP481725A1480	10/100
oyster	**2512-949-507**	2CHP491725A1480	10/100
avocado	**2512-946-507**	2CHP461725A1480	10/100
purple	**2512-943-507**	2CHP431725A1480	10/100

Colourd cover frame 3gang



Dimensions: (L x W x D): 84 mm

Colour	Type	Order code	Pack/Qty.
white	**2513-922-507**	2CKA001725A1407	10/100
alpine white	**2513-944-507**	2CKA001725A1404	10/100
coral	**2513-947-507**	2CHP471725A1481	10/100
sun	**2513-945-507**	2CHP451725A1481	10/100
ocean	**2513-948-507**	2CHP481725A1481	10/100
oyster	**2513-949-507**	2CHP491725A1481	10/100
avocado	**2513-946-507**	2CHP461725A1481	10/100
purple	**2513-943-507**	2CHP431725A1481	10/100

Colourd cover frame 4gang

Dimensions: (L x W x D): 84 mm

Colour	Type	Order code	Pack/Qty.
white	**2514-922-507**	2CKA001725A1402	10/100
alpine white	**2514-944-507**	2CKA001725A1401	10/100
coral	**2514-947-507**	2CHP471725A1482	10/100
sun	**2514-945-507**	2CHP451725A1482	10/100
ocean	**2514-948-507**	2CHP481725A1482	10/100
oyster	**2514-949-507**	2CHP491725A1482	10/100
avocado	**2514-946-507**	2CHP461725A1482	10/100
purple	**2514-943-507**	2CHP431725A1482	10/100

Colourd cover frame 5gang



Dimensions: (L x W x D): 84 mm

Colour	Type	Order code	Pack/Qty.
white	**2515-922-507**	2CKA001725A1406	10/100
alpine white	**2515-944-507**	2CKA001725A1408	10/100
coral	**2515-947-507**	2CHP471725A1483	10/100
sun	**2515-945-507**	2CHP451725A1483	10/100
ocean	**2515-948-507**	2CHP481725A1483	10/100
oyster	**2515-949-507**	2CHP491725A1483	10/100
avocado	**2515-946-507**	2CHP461725A1483	10/100
purple	**2515-943-507**	2CHP431725A1483	10/100

Notes

Alba

Thinking about tomorrow.

ALBA is the perfect balance between design and nature, between industrial product and respect for the enviroment, between pleasure and responsibility. ALBA is ABB-Niessen´s new range of switches that includes a complete range of technological solutions, new touch sensors for ABB-ibus KNX and ABB-free@home and is distinguished by its unique design ans sustainable character.

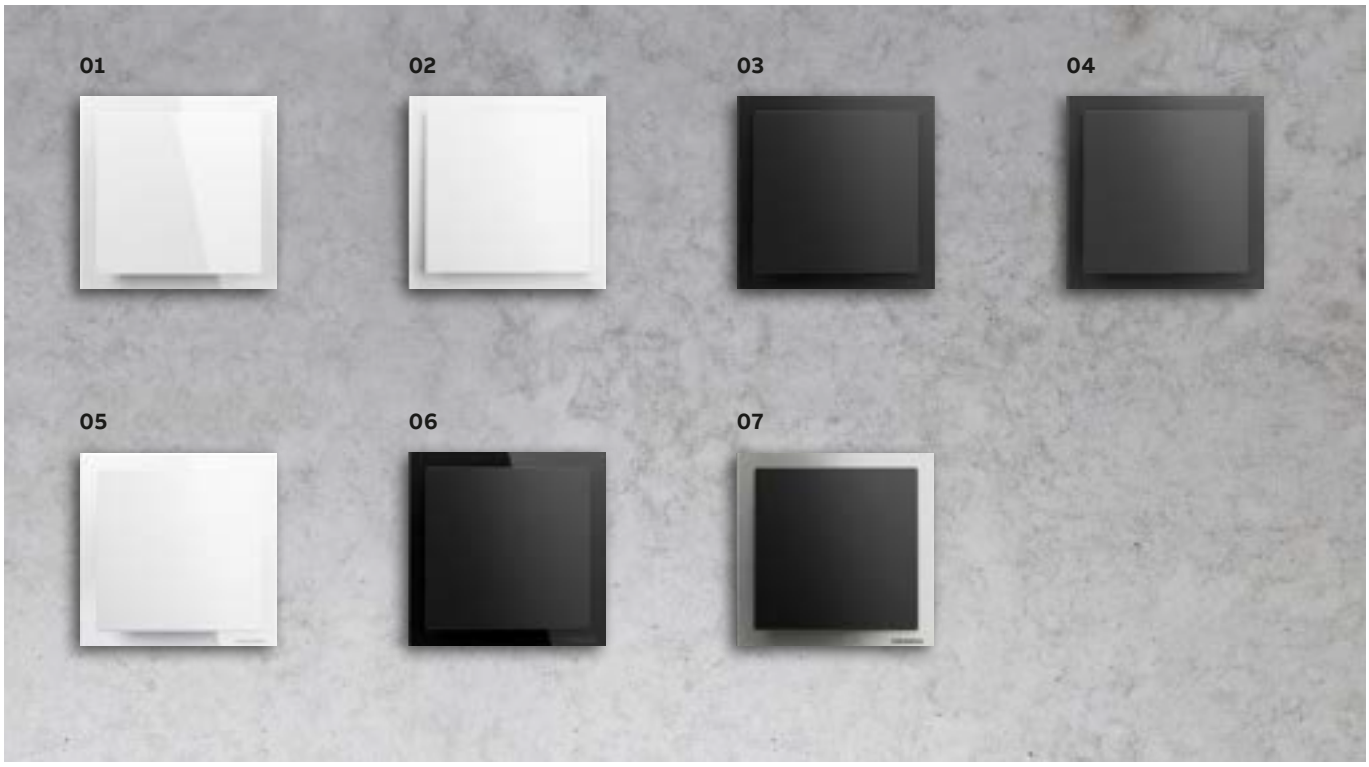

01 BL White glossy
02 BT White matt
03 NT Black matt
04 GR Grey matt
05 CB White glass
06 CN Black glass
07 AI Stainless steel

Alba

Selected functions

01

02

03

04

05

06

07

08

09

10

01 Switch / Push button
02 USB charger A+C
03 Blind control switch /push button
04 Card switch rotary dimmer
05 VDI connector HDMI
06 Rotary dimmer LED
07 USB & Bluetooth module
08 Touch sensor
09 Touch display 2,4" ABB-free@home / ABB i-bus KNX
10 Room Touch 4" ABB -free@home / ABBi-bus KNX

01

02

03

04

1 to 4 gang cover frame
01 86 x 85 mm
02 86 x 156,1 mm
03 84 x 227,2 mm
04 84 x 298,3 mm

For more information about light switch ranges visit ABB global web sites.

Alba

One design, all functionalities ALBA offers a complete range of produts designed to cover all functionalities: blind and light controls, dimmers, ABB-free@home®, ABB i-bus® KNX. Thanks to its wide range of options, ALBA responds to all types of projects, increasing their value and elevating them to the highest category of distinction and modernity.

Switch composition

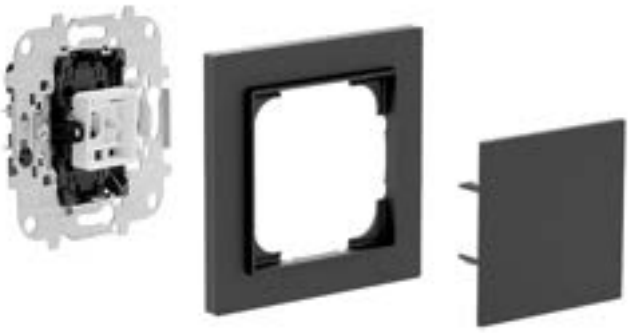

Insert Frame Rocker

Socket outlet composition

Insert Frame Cover

Specifications:
• 250 V~
• 10 AX / 16 AX
• IP20
• Declaration of conformity CE: - Directive 2014/35/UE - Directive europea RoHS 2011 /65/EU - IEC 60669-1 - UNE-EN 60669-1 - UNE 20324-REBT-BT27
• Product compliance AENOR: - UNE-EN 60669-1 - UNE-EN 60669-1/A1 - UNE-EN 60669-1/A2

Specifications:
• 250 V~
• 16 A
• IP20
• Directives: - European directive RoHS 2011/65/EU - IEC 60884-1 - UNE-EN 20315 - UNE 20324-REBT-BT27
• Product compliance AENOR: - UNE 20315-1-1

Alba
Switches

Switch 1-gang, 1-way, single pole



10 AX ; 250 V~
200 W SBL: LEDi, CFLi
Optional ilumination or locator LED lamps
ref. 6192 BL or 6192.24 BL.
Rocker codes: 8901, 8901.2, 8901.3 and 8901.4

Colour	Type	Order code	Pack/Qty.
	8101	2CLA810100A1001	10

Switch 1-gang, 1-way, double pole 16A

16 AX ; 250 V~
200 W SBL: LEDi, CFLi
Optional ilumination or locator LED lamps
ref. 6192 BL or 6192.24 BL.
Rocker codes: 8901, 8901.2, 8901.3 y 8901.4

Colour	Type	Order code	Pack/Qty.
	8101.1	2CLA810110A1001	10

Switch 1-gang, 1-way, double pole



10 AX ; 250 V~
200 W SBL: LEDi, CFLi
Optional ilumination or locator LED lamp
ref. 6192 BL or 6192.24 BL.
Rocker codes: 8901, 8901.2, 8901.3 and 8901.4

Colour	Type	Order code	Pack/Qty.
	8101.2	2CLA810120A1001	10

Switch 1-gang, 1-way, single pole with locator lamp



10 AX ; 250 V~
200 W SBL: LEDi, CFLi
With LED lamp 6192 BL.
Rocker codes: 8901.3 and 8901.4

Colour	Type	Order code	Pack/Qty.
	8101.5	2CLA810150A1001	10

Switch 1-gang, 2-way, single pole



10 AX ; 250 V~
200 W SBL: LEDi, CFLi
Optional ilumination or locator LED lamp
ref. 6192 BL or 6192.24 BL.
Rocker codes: 8901, 8901.2, 8901.3 and 8901.4

Colour	Type	Order code	Pack/Qty.
	8101.8	2CLA810180A1001	10

Switch 1-gang, 2-way, single pole

10 AX ; 250 V~
200 W SBL: LEDi, CFLi
Optional ilumination or locator LED lamp
ref. 6192 BL or 6192.24 BL.
Rocker codes: 8901, 8901.2, 8901.3 and 8901.4

Colour	Type	Order code	Pack/Qty.
	8102	2CLA810200A1001	10

Switch 1-gang, 2-way, single pole 16A

16 AX ; 250 V~
200 W SBL: LEDi, CFLi
Optional ilumination or locator LED lamps
ref. 6192 BL or 6192.24 BL.
Rocker codes: 8901, 8901.2, 8901.3 and 8901.4

Colour	Type	Order code	Pack/Qty.
	8102.1	2CLA810210A1001	10

Switch 1-gang, 2-way, single pole

10 AX ; 250 V~
200 W SBL: LEDi, CFLi
With LED lamp 6192 BL.
Rocker codes: 8901.3 and 8901.4

Colour	Type	Order code	Pack/Qty.
	8102.5	2CLA810250A1001	10

Switch 1-gang, 2-way, single pole with fixing claws



10 AX ; 250 V~
200 W SBL: LEDi, CFLi
Optional ilumination or locator LED lamp
ref. 6192 BL or 6192.24 BL.
Rocker codes: 8901, 8901.2, 8901.3 and 8901.4

Colour	Type	Order code	Pack/Qty.
	8102.8	2CLA810280A1001	10

Switch 1-gang, intermediate, single pole



10 AX ; 250 V~
200 W SBL: LEDi, CFLi
Optional ilumination or locator LED lamp
ref. 6192 BL or 6192.24 BL.
Rocker codes: 8901, 8901.2, 8901.3 and 8901.4

Colour	Type	Order code	Pack/Qty.
	8110	2CLA811000A1001	10

Alba

Switches

Rocker for switch, 1-gang

Compatible inserts:
8101, 8101.1, 8101.2, 8101.8, 8102, 8102.1, 8102.8, 8104, 8104.8, 8104.9 and 8110.

Colour	Type	Order code	Pack/Qty.
White glossy	**8901 BL**	2CLA890100A1101	20
White matt	**8901 BT**	2CLA890100A1001	20
Black matt	**8901 NT**	2CLA890100A1501	10
Grey matt	**8901 GR**	2CLA890100A1801	10

Rocker with On/Off symbol, 1-gang

Compatible inserts:
8101, 8101.1, 8101.2, 8101.8, 8102, 8102.1, 8102.8, 8104, 8104.8, 8104.9 and 8110.

Colour	Type	Order code	Pack/Qty.
White glossy	**8901.2 BL**	2CLA890120A1101	20
White matt	**8901.2 BT**	2CLA890120A1001	20
Black matt	**8901.2 NT**	2CLA890120A1501	20
Grey matt	**8901.2 GR**	2CLA890120A1801	20

Rocker for switch with lens, 1-gang

Compatible inserts:
8101, 8101.1, 8101.2, 8101.5, 8101.8, 8102, 8102.1, 8102.8, 8104, 8104.5, 8104.8, 8104.9 and 8110.

Colour	Type	Order code	Pack/Qty.
White glossy	**8901.3 BL**	2CLA890130A1101	20
White matt	**8901.3 BT**	2CLA890130A1001	20
Black matt	**8901.3 NT**	2CLA890130A1501	20
Grey matt	**8901.3 GR**	2CLA890130A1801	20

Rocker with lens & On/Off symbol, 1-gang

Compatible inserts:
8101, 8101.1, 8101.2, 8101.5, 8101.8, 8102, 8102.1, 8102.8, 8104, 8104.5, 8104.8, 8104.9 and 8110.

Colour	Type	Order code	Pack/Qty.
White glossy	**8901.4 BL**	2CLA890140A1101	20
White matt	**8901.4 BT**	2CLA890140A1001	20
Black matt	**8901.4 NT**	2CLA890140A1501	20
Grey matt	**8901.4 GR**	2CLA890140A1801	20

Card switches

Card switch 1-gang, 1-way, double pole



10 AX ; 250 V~
100 W SBL: LEDi, CFLi
With LED lamp
Cover code: 8914

Colour	Type	Order code	Pack/Qty.
	8114	2CLA811400A1001	10

Card switch 1-gang, 1-way, double pole 16A



16 AX ; 250 V~
With LED lamp
Cover code: 8914

Colour	Type	Order code	Pack/Qty.
	8114.1	2CLA811410A1001	10

Card switch 1-gang, 2-way, double pole

10 AX ; 250 V~
100 W SBL: LEDi, CFLi
With LED lamp
Cover code: 8914

Colour	Type	Order code	Pack/Qty.
	8114.2	2CLA811420A1001	10

Card switch 1-gang, 1-way, SP w/ time delay

127 V~ ; 60 Hz / 230 V~ ; 50 Hz
400 W SBL : LEDi, CFLi
3000 W / VA a 230 Vac
1300 VA a 230 Vac
With LED lamp.
Time delay switch: 5 - 90 seg.
Cover code: 8914

Colour	Type	Order code	Pack/Qty.
	8114.5	2CLA811450A1001	1

Cover plate for card switch with lens

For 54 mm. width cards.
Compatible inserts:. 8114, 8114.1, 8114.2 and 8114.5

Colour	Type	Order code	Pack/Qty.
White glossy	**8914 BL**	2CLA891400A1101	5
White matt	**8914 BT**	2CLA891400A1001	5
Black matt	**8914 NT**	2CLA891400A1501	5
Grey matt	**8914 GR**	2CLA891400A1801	5

Alba

Push buttons

Push-button 1-gang, single pole, NO



10 A ; 250 V~
Optional ilumination or locator LED lamp
ref. 6192 BL or 6192.24 BL.
Rocker codes: 8904, 8904.2, 8904.3 and 8904.4

Colour	Type	Order code	Pack/Qty.
	8104	2CLA810400A1001	10

Push-button 1-gang, SP, NO w/ locator lamp



10 A ; 250 V~
With LED lamp 6192 BL.
Rocker codes: 8904.3 and 8904.4
Recommended use with electronic functions

Colour	Type	Order code	Pack/Qty.
	8104.5	2CLA810450A1001	10

Push-button 1-gang, single pole, NO with fixing claws



10 A ; 250 V~
Optional ilumination or locator LED lamp
ref. 6192 BL or 6192.24 BL.
Rocker codes: 8904, 8904.2, 8904.3 and 8904.4

Colour	Type	Order code	Pack/Qty.
	8104.8	2CLA810480A1001	10

Push-button 1-gang, single pole, NC



10 A ; 250 V~
Optional ilumination or locator LED lamp
ref. 6192 BL or 6192.24 BL.
Rocker codes: 8904, 8904.2, 8904.3 and 8904.4

Colour	Type	Order code	Pack/Qty.
	8104.9	2CLA810490A1001	5

Rocker with bell symbol, 1-gang

Compatible inserts: 8104, 8104.8 and 8104.9

Colour	Type	Order code	Pack/Qty.
White glossy	**8904 BL**	2CLA890400A1101	10
White matt	**8904 BT**	2CLA890400A1001	10
Black matt	**8904 NT**	2CLA890400A1501	10
Grey matt	**8904 GR**	2CLA890400A1801	10

Rocker with light symbol, 1-gang

Compatible inserts: 8104, 8104.8 and 8104.9

Colour	Type	Order code	Pack/Qty.
White glossy	**8904.2 BL**	2CLA890420A1101	10
White matt	**8904.2 BT**	2CLA890420A1001	10
Black matt	**8904.2 NT**	2CLA890420A1501	10
Grey matt	**8904.2 GR**	2CLA890420A1801	10

Rocker with bell symbol & lens, 1-gang

Compatible inserts: 8104, 8104.5, 8104.8 and 8104.9

Colour	Type	Order code	Pack/Qty.
White glossy	**8904.3 BL**	2CLA890430A1101	5
White matt	**8904.3 BT**	2CLA890430A1001	5
Black matt	**8904.3 NT**	2CLA890430A1501	5
Grey matt	**8904.3 GR**	2CLA890430A1801	5

Rocker with light symbol & lens, 1-gang

Compatible inserts: 8104, 8104.5, 8104.8 and 8104.9

Colour	Type	Order code	Pack/Qty.
White glossy	**8904.4 BL**	2CLA890440A1101	5
White matt	**8904.4 BT**	2CLA890440A1001	5
Black matt	**8904.4 NT**	2CLA890440A1501	5
Grey matt	**8904.4 GR**	2CLA890440A1801	5

Alba
Combinations

Switch 2-gangs, 1-way, single pole

10 AX ; 250 V~
200 W SBL: LEDi, CFLi
Rocker code: 8911

Colour	Type	Order code	Pack/Qty.
	8111	2CLA811100A1001	10

Switch 2-gangs, 2-way, single pole

10 AX ; 250 V~
200 W SBL: LEDi, CFLi
Rocker code: 8911

Colour	Type	Order code	Pack/Qty.
	8122	2CLA812200A1001	10

Push-button 2-gangs, single pole, NO

10 A ; 250 V~
Without interlock
Rocker codes: 8911 and 8944

Colour	Type	Order code	Pack/Qty.
	8144.2	2CLA814420A1001	10

Switch 2-way + push-button 1-way NO, SP

Switch 2-way
10 AX ; 250 V~
200 W SBL: LEDi, CFLi
Push button
10 A ; 250 V~
Rocker code: 8911

Colour	Type	Order code	Pack/Qty.
	8142	2CLA814200A1001	10

Push-button 1-way NO, SP + switch 2-way

Push button
10 A ; 250 V~
Switch 2-way
10 AX ; 250 V~
200 W SBL: LEDi, CFLi
Rocker code: 8911

Colour	Type	Order code	Pack/Qty.
	8142.1	2CLA814210A1001	10

Rocker for switch/push-button, 2-gangs

Compatible inserts: 8111, 8122, 8144.2, 8142 and 8142.1

Colour	Type	Order code	Pack/Qty.
White glossy	**8911 BL**	2CLA891100A1101	20
White matt	**8911 BT**	2CLA891100A1001	20
Black matt	**8911 NT**	2CLA891100A1501	20
Grey matt	**8911 GR**	2CLA891100A1801	20

Indicator / locator lamp

Indicator/locator LED lamp 230Vac

For 81XX inserts 230 V~.
Long life cycle
Two functions: Indicator or locator light
Power consumption: 0,2mA.
LED in white color.
Especially recommended for LED and energy savind lamps

Colour	Type	Order code	Pack/Qty.
	6192 BL	2CLA819202A1001	10

Indicator/locator LED lamp 24V

For 81XX inserts 24 V.
Long life cycle
Two functions: Indicator or locator light
Power consumption: 1,5mA.
LED in white color
specially recommended for LED and energy savind lamps

Colour	Type	Order code	Pack/Qty.
	6192.24 BL	2CLA619224A1001	10

Alba

Blind controls

Push-button blind control 2-gangs

10 A ; 250 V~
Interlocked gangs
Rocker code: 8944

Colour	Type	Order code	Pack/Qty.
	8144	2CLA814400A1001	10

Switch blind control 2-gangs

10 A ; 250 V~
Interlocked gangs
Rocker code: 8944

Colour	Type	Order code	Pack/Qty.
	8144.1	2CLA814410A1001	10

Rocker for blind switch/push-button

Rocker for blind switch/push-button code:
8144 & 8144.1.

Colour	Type	Order code	Pack/Qty.
White glossy	**8944 BL**	2CLA894400A1101	10
White matt	**8944 BT**	2CLA894400A1001	10
Black matt	**8944 NT**	2CLA894400A1501	10
Grey matt	**8944 GR**	2CLA894400A1801	10

Pullcord switch

Pullcord switch 1-gang, 1-way, single pole

10 A ; 250 V~
Cord lenght: 2m
Cover code: 8907

Colour	Type	Order code	Pack/Qty.
	8148	2CLA814800A1001	5

Cover for pull cord switch

Combination insert: 8148

Colour	Type	Order code	Pack/Qty.
White glossy	**8907 BL**	2CLA890700A1101	10
White matt	**8907 BT**	2CLA890700A1001	10
Black matt	**8907 NT**	2CLA890700A1501	10
Grey matt	**8907 GR**	2CLA890700A1801	10

Cable outlet

Cable outlet

Cable tie included
3 connection screw terminals up to 2,5mm²
Cover code: 8907

Colour	Type	Order code	Pack/Qty.
	8107	2CLA810700A1001	10

Cover plate for cable outlet

Combination insert: 8107

Colour	Type	Order code	Pack/Qty.
White glossy	**8907 BL**	2CLA890700A1101	10
White matt	**8907 BT**	2CLA890700A1001	10
Black matt	**8907 NT**	2CLA890700A1501	10
Grey matt	**8907 GR**	2CLA890700A1801	10

Alba

Blank cover plate

Blank cover

Cover plate + mounting grid.
Without fixing claws

Colour	Type	Order code	Pack/Qty.
White glossy	**8900 BL**	2CLA890000A1101	10
White matt	**8900 BT**	2CLA890000A1001	10
Black matt	**8900 NT**	2CLA890000A1501	10
Grey matt	**8900 GR**	2CLA890000A1801	10

Timbre / Zumbador

Electronic door bell with 4 melodies

230 V~ ; 50 Hz
4 melodies available
Acoustic power at 1m. with cover plate: 72 dB.
Cover code: 8929

Colour	Type	Order code	Pack/Qty.
	8124.2	2CLA812420A1001	1

Buzzer



125 / 250 V~ ; 8 VA
Adjustable tone
Acoustic power at 1m. with cover plate: 75 dB.
Cover code: 8929

Colour	Type	Order code	Pack/Qty.
	8119	2CLA811900A1001	10

Cover plate for buzzer/door bell

Cover plate for buzzer / door bell code: 8119 & 8124.2.

Colour	Type	Order code	Pack/Qty.
White glossy	**8929 BL**	2CLA892900A1101	5
White matt	**8929 BT**	2CLA892900A1001	5
Black matt	**8929 NT**	2CLA892900A1501	5
Grey matt	**8929 GR**	2CLA892900A1801	5

Schuko socket outlets

Schuko socket outlet



16A ; 250 V~
Involuntary direct contact protection.
Cover codes: 8988 and 8988.1

Colour	Type	Order code	Pack/Qty.
	8188	2CLA818800A1001	10

Schuko socket outlet with fixing claws



16A ; 250 V~
Involuntary direct contact protection.
Cover codes: 8988 and 8988.1

Colour	Type	Order code	Pack/Qty.
	8188.5	2CLA818850A1001	10

Schuko socket outlet screwless connection



16A ; 250 V~
Involuntary direct contact protection.
Screwless terminals.
Instalation time saving aprox. 40%.
Cover codes: 8988 and 8988.1

Colour	Type	Order code	Pack/Qty.
	8188.6	2CLA818860A1001	10

Schuko socket outlet with indicator lamp



16A ; 250 V~
Power control indicator LED lamp.
Involuntary direct contact protection.
Cover code: 8988.8

Colour	Type	Order code	Pack/Qty.
	8188.8	2CLA818880A1001	5

Cover plate for Schuko socket outlet

Compatible inserts: 8188, 8188.5 and 8188.6

Colour	Type	Order code	Pack/Qty.
White glossy	**8988 BL**	2CLA898800A1101	5
White matt	**8988 BT**	2CLA898800A1001	5
Black matt	**8988 NT**	2CLA898800A1501	5
Grey matt	**8988 GR**	2CLA898800A1801	5

Alba

Schuko socket outlets

Cover plate for Schuko socket outlet w/ lid

Designed for places close to sources of dirt such as kitchens.
Lid opening: 90º.
Combination inserts: 8188, 8188.5 and 8188.6

Colour	Type	Order code	Pack/Qty.
White glossy	**8988.1 BL**	2CLA898810A1101	5
White matt	**8988.1 BT**	2CLA898810A1001	5
Black matt	**8988.1 NT**	2CLA898810A1501	5
Grey matt	**8988.1 GR**	2CLA898810A1801	5

Cover plate for Schuko socket outlet w/ lens

Combinatio insert: 8188.8

Colour	Type	Order code	Pack/Qty.
White glossy	**8988.8 BL**	2CLA898880A1101	5
White matt	**8988.8 BT**	2CLA898880A1001	5
Black matt	**8988.8 NT**	2CLA898880A1501	5
Grey matt	**8988.8 GR**	2CLA898880A1801	5

Earth-pin socket outlet

16A ; 250 V~
Type E: 2P + E
Involuntary direct contact protection.
Cover code: 8987

Colour	Type	Order code	Pack/Qty.
	8187	2CLA818700A1001	10

Cover plate for earth-pin socket outlet

Combination insert: 8187

Colour	Type	Order code	Pack/Qty.
White glossy	**8987 BL**	2CLA898700A1101	5
White matt	**8987 BT**	2CLA898700A1001	5
Black matt	**8987 NT**	2CLA898700A1501	5
Grey matt	**8987 GR**	2CLA898700A1801	5

Schuko socket outlet with USB

Schuko socket outlet + USB charger A+C type

Rated voltage: 250 VCA
Rated current: 16 A
Tipo F: 2P+E. Involuntary direct contact protection.
USB chargers: Type A + type C.
Output current: 2.000 mA shared.
Cover code: 8988.4

Colour	Type	Order code	Pack/Qty.
	8188.4	2CLA818840A1001	1

Cover plate for socket outlet + USB charger A+C

Cover plate for Schuko socket outlet + USB charger
Combination insert: 8188.4

Colour	Type	Order code	Pack/Qty.
White glossy	**8988.4 BL**	2CLA898840A1101	5
White matt	**8988.4 BT**	2CLA898840A1001	5
Black matt	**8988.4 NT**	2CLA898840A1501	5
Grey matt	**8988.4 GR**	2CLA898840A1801	5

USB chargers

USB charger A+C

Input voltage: 100 - 240 V AC ± 10%
Input frecuancy: 50 - 60 Hz
Input current: 0,20 A AC
Output power: 5V DC +5 /-5%
Output current: 18W shared.
USB type A + type C.
Cover code: 8985

Colour	Type	Order code	Pack/Qty.
	8185.1	2CLA818510A1001	1

Cover plate for USB chargers

Combination insert: 8185.1

Colour	Type	Order code	Pack/Qty.
White glossy	**8985 BL**	2CLA898500A1101	5
White matt	**8985 BT**	2CLA898500A1001	5
Black matt	**8985 NT**	2CLA898500A1501	5
Grey matt	**8985 GR**	2CLA898500A1801	5

Alba

Telephone outlet

Telephone outlet RJ12

6 contacts.
Suitable for 2 (6P2C), 4 (6P4C) or 6 (6P6C) RJ11 and RJ12 jacks.
Cover code: 8917

Colour	Type	Order code	Pack/Qty.
	8117	2CLA811700A1001	10

Cover plate for telephone outlet

Combination insert: 8117

Colour	Type	Order code	Pack/Qty.
White glossy	**8917 BL**	2CLA891700A1101	10
White matt	**8917 BT**	2CLA891700A1001	10
Black matt	**8917 NT**	2CLA891700A1501	10
Grey matt	**8917 GR**	2CLA891700A1801	10

Telephone outlet

TV / R terminal final outlet

Without filter
Installation as a terminal outlet connected to a tap-off or splitter (without terminal resistor)
Cover code: 8950

Colour	Type	Order code	Pack/Qty.
	8150	2CLA815000A1001	10

TV / R final outlet - CATV outlet

With filter
Installation as a terminal outlet connected to a tap-off or splitter (without terminal resistor)
Cover code: 8950

Colour	Type	Order code	Pack/Qty.
	8150.3	2CLA815030A1001	10

TV / R loop-through outlet

Installation as an intermediate outlet in series connected to each other. From 2nd to 4th floor.
Cover code: 8950

Colour	Type	Order code	Pack/Qty.
	8150.7	2CLA815070A1001	10

TV-R/SAT terminal outlet

Installation as a terminal outlet connected to a tap-off or splitter (without terminal resistor)
Cover code: 8950.1

Colour	Type	Order code	Pack/Qty.
	8151.3	2CLA815130A1001	10

TV-R/SAT final outlet

Installation as a terminal outlet connected to a tap-off or splitter (without terminal resistor)
Cover code: 8950.1

Colour	Type	Order code	Pack/Qty.
	8151.7	2CLA815170A1001	10

Alba

TV/R/SAT outlets

TV-R/SAT loop-through outlet

Toma intermedia para instalación en serie o cascada.
Installation as an intermediate outlet in series connected to each other.
From 2nd to 4th floor.
Cover code: 8950.1

Colour	Type	Order code	Pack/Qty.
	8151.8	2CLA815180A1001	10

Cover plate for TV/R outlet

Combination inserts: 8150, 8150.3 and 8150.7

Colour	Type	Order code	Pack/Qty.
White glossy	**8950 BL**	2CLA895000A1101	10
White matt	**8950 BT**	2CLA895000A1001	10
Black matt	**8950 NT**	2CLA895000A1501	10
Grey matt	**8950 GR**	2CLA895000A1801	10

Cover plate for TV-R/SAT outlet

Combination inserts: 8151.3, 8151.7 and 8151.8

Colour	Type	Order code	Pack/Qty.
White glossy	**8950.1 BL**	2CLA895100A1101	20
White matt	**8950.1 BT**	2CLA895100A1001	20
Black matt	**8950.1 NT**	2CLA895100A1501	20
Grey matt	**8950.1 GR**	2CLA895100A1801	20

Data outlet

Data outlet RJ45 Cat.5e UTP

8 contacts.
UPT Category 5E.
Frecuency: 1-160 MHz
Transmission: 1,2Gb/seg
Cover code: 8917

Colour	Type	Order code	Pack/Qty.
	8118	2CLA811800A1001	10

Cover plate for data outlet

Combination insert: 8118

Colour	Type	Order code	Pack/Qty.
White glossy	**8917 BL**	2CLA891700A1101	10
White matt	**8917 BT**	2CLA891700A1001	10
Black matt	**8917 NT**	2CLA891700A1501	10
Grey matt	**8917 GR**	2CLA891700A1801	10

Alba

Housing for data outlets

Housing for data outlets – Keystone, 3M & AMP type

Housing for connectors with Keystone, 3M & AMP type clipping system.
Cover codes: 8916.3, 8916.4, 8916.7 and 8916.8

Colour	Type	Order code	Pack/Qty.
	2016	2CLA201600A1001	10

Housing for data outlets – Systimax type

Housing for connectors with Keystone, Systimax type clipping system.
Cover codes: 8916.3, 8916.4, 8916.7 and 8916.8

Colour	Type	Order code	Pack/Qty.
	2016.1	2CLA201610A1001	10

Housing for data outlets – Panduit type

Housing for connectors with Keystone, Panduit type clipping system.
Cover codes: 8916.3, 8916.4, 8916.7 and 8916.8

Colour	Type	Order code	Pack/Qty.
	2016.2	2CLA201620A1001	10

Housing for data outlets – R&M type

Housing for connectors with Keystone, R&M type clipping system.
Cover codes: 8916.3, 8916.4, 8916.7 and 8916.8

Colour	Type	Order code	Pack/Qty.
	2016.3	2CLA201630A1001	10

Housing + connector RJ45 Cat.5E UTP

Frecuency range: 1 – 160 MHz.
Transmission speed: 1,2 Gb / seg.
Cover codes: 8916.3, 8916.4, 8916.7 and 8916.8

Colour	Type	Order code	Pack/Qty.
	2016.50	2CLA201650N1001	10

Housing + connector RJ45 Cat.6 UTP

Frecuency range: 1 – 3000 MHz.
Transmission speed: 4,8 Gb / seg.
Cover codes: 8916.3, 8916.4, 8916.7 and 8916.8

Colour	Type	Order code	Pack/Qty.
	2016.60	2CLA201660N1001	10

Housing + connector RJ45 cat.6A STP

Cable labeling T568A & T568 B.
Transmission speed: 10Gb/S.
TRansmaission under norms ANAI/TIA/EIA 568 B.2.
IDC: PC UL94V-0, valid for cable 22-26AWG
Contact: RJ45 8P8C
Temperature: -10° C a +60° C.
Compatible covers ref. 8916.3, 8916.4, 8916.7 y 8916.8.

Colour	Type	Order code	Pack/Qty.
	2016.65	2CLA201665N1001	10

Housing + optical fiber connector SC

Lost (IL) <=0.3dB for SM and MM.
Durability (500): 0.2dB max. increase.
Power (g/f): 100300.
Temperature: -40° C a +85° C.
In compliance with standars JIS C5974 y Bellcore GR-326.
In compliance with IEC874-14 & IEC874-19.
Compatible covers ref. 8916.3, 8916.4, 8916.7 y 8916.8.

Colour	Type	Order code	Pack/Qty.
	2016.9	2CLA201690N1001	10

Alba

Housing for data outlets

Cover plate for data outlet 1-gang

For housings and connectors codes: 2016, 2016.1, 2016.2, 2016.3, 2016.50, 2016.52, 2016.60 and 2016.62.

Colour	Type	Order code	Pack/Qty.
White glossy	**8916.3 BL**	2CLA891630A1101	10
White matt	**8916.3 BT**	2CLA891630A1001	10
Black matt	**8916.3 NT**	2CLA891630A1501	10
Grey matt	**8916.3 GR**	2CLA891630A1801	10

Cover plate for data outlet 2-gang

For housings and connectors codes: 2016, 2016.1, 2016.2, 2016.3, 2016.50, 2016.52, 2016.60 and 2016.62.

Colour	Type	Order code	Pack/Qty.
White glossy	**8916.4 BL**	2CLA891640A1101	5
White matt	**8916.4 BT**	2CLA891640A1001	5
Black matt	**8916.4 NT**	2CLA891640A1501	5
Grey matt	**8916.4 GR**	2CLA891640A1801	5

Cover plate for data outlet 1-gang at 45º

For housings and connectors codes: 2016, 2016.1, 2016.2, 2016.3, 2016.50, 2016.52, 2016.60 and 2016.62.

Colour	Type	Order code	Pack/Qty.
White glossy	**8916.7 BL**	2CLA891670A1101	5
White matt	**8916.7 BT**	2CLA891670A1001	5
Black matt	**8916.7 NT**	2CLA891670A1501	5
Grey matt	**8916.7 GR**	2CLA891670A1801	5

Cover plate for data outlet 1-gang at 45º

For housings and connectors codes: 2016, 2016.1, 2016.2, 2016.3, 2016.50, 2016.52, 2016.60 and 2016.62.

Colour	Type	Order code	Pack/Qty.
White glossy	**8916.8 BL**	2CLA891680A1101	5
White matt	**8916.8 BT**	2CLA891680A1001	5
Black matt	**8916.8 NT**	2CLA891680A1501	5
Grey matt	**8916.8 GR**	2CLA891680A1801	5

VDI connetors

2x RCA connection unit

Front: 2x RCA connectors (Red / White). Rear: screw terminals (4 wires).
Without fixing claws.
Cover plate code: 8955.2.

Colour	Type	Order code	Pack/Qty.
	8155.2	2CLA815520A1001	1

3x RCA connection unit

Front: 3x RCA connectors (Red / White / Yellow). Rear: screw terminals (6 wires).
Without fixing claws.
Cover plate code: 8955.3.

Colour	Type	Order code	Pack/Qty.
	8155.3	2CLA815530A1001	1

Mini-jack connection unit

Front: 1x Mini-Jack connector (3,5mm stereo audio jack).
Rear: screw terminals (3/4 wires).
Without fixing claws.
Cover plate code: 8955.

Colour	Type	Order code	Pack/Qty.
	8155.4	2CLA815540A1001	1

VGA connection unit

Front: 1x VGA connector (DE-15 connector).
Rear: screw terminals (15 wires).
Without fixing claws.
Cover plate code: 8955.5.

Colour	Type	Order code	Pack/Qty.
	8155.5	2CLA815550A1001	1

HDMI connection unit



Front: 1x HDMI connector (Type A connector).
Rear: screwless terminals (20 wires).
Without fixing claws.
Cover plate code: 8955.

Colour	Type	Order code	Pack/Qty.
	8155.6	2CLA815560A1001	1

Alba

VDI connetors

HDMI female-female connection unit

Front: 1x HDMI connector (Type A connector).
Rear: 1x HDMI connector (Type A connector) fitted at 90° angle.
Without fixing claws.
Cover plate code: 8955.

Colour	Type	Order code	Pack/Qty.
	8155.7	2CLA815570A1001	1

HDMI female-female connection unit with cable

Front: 1x HDMI connector (Type A connector).
Rear: 1x HDMI connector (Type A connector) fitted at 90° angle and cable 20cm.
Without fixing claws.
Cover plate code: 8955.

Colour	Type	Order code	Pack/Qty.
	8155.71	2CLA815571A1001	1

USB connection unit

Front: 1x USB 2.0 connector (Type A connector).
Rear: screw terminals (5 wires).
Without fixing claws.
Cover plate code: 8955.

Colour	Type	Order code	Pack/Qty.
	8155.8	2CLA815580A1001	1

USB female-female connection unit

Front: 1x USB 2.0 connector (Type A connector).
Rear: 1x USB 2.0 connector (Type A connector) fitted at 90° angle.
Without fixing claws.
Cover plate code: 8955.

Colour	Type	Order code	Pack/Qty.
	8155.9	2CLA815590A1001	1

USB female-female connection unit with cable

Front: 1x USB 2.0 connector (Type A connector).
Rear: 1x USB 2.0 connector (Type A connector) fitted at 90° angle and cable 20cm.
Without fixing claws.
Cover plate code: 8955.

Colour	Type	Order code	Pack/Qty.
	8155.91	2CLA815591A1001	1

Cover plate 2xRCA connection unit

Combination insert: 8155.2

Colour	Type	Order code	Pack/Qty.
White glossy	**8955.2 BL**	2CLA895520A1101	1
White matt	**8955.2 BT**	2CLA895520A1001	1
Black matt	**8955.2 NT**	2CLA895520A1501	1
Grey matt	**8955.2 GR**	2CLA895520A1801	1

Cover plate 3xRCA connection unit

Combination insert: mecanismo ref. 8155.3

Colour	Type	Order code	Pack/Qty.
White glossy	**8955.3 BL**	2CLA895530A1101	1
White matt	**8955.3 BT**	2CLA895530A1001	1
Black matt	**8955.3 NT**	2CLA895530A1501	1
Grey matt	**8955.3 GR**	2CLA895530A1801	1

Cover plate VGA connection unit

Combination insert: 8155.5

Colour	Type	Order code	Pack/Qty.
White glossy	**8955.5 BL**	2CLA895550A1101	1
White matt	**8955.5 BT**	2CLA895550A1001	1
Black matt	**8955.5 NT**	2CLA895550A1501	1
Grey matt	**8955.5 GR**	2CLA895550A1801	1

Cover plate 1 VDI connecor

Combination insert: 8155.4, 8155.6, 8155.7, 8155.71, 8155.8, 8155.9 and 8155.91

Colour	Type	Order code	Pack/Qty.
White glossy	**8955 BL**	2CLA895500A1101	1
White matt	**8955 BT**	2CLA895500A1001	1
Black matt	**8955 NT**	2CLA895500A1501	1
Grey matt	**8955 GR**	2CLA895500A1801	1

Alba

VDI connetors

HDMI wired + USB connection unit



Front: 1x HDMI connector (Type A connector) & 1x USB 2.0 connector (Type A connector).
Rear: HDMI screwless terminals (20 wires) & USB screw terminals (5 wires).
Without fixing claws.
Cover plate code: 8955.1.

Colour	Type	Order code	Pack/Qty.
	8155.68	2CLA815568A1001	1

HDMI female-female + USB connection unit

Front: 1x HDMI connector (Type A connector) & 1x USB 2.0 connector (Type A connector).
Rear: 1x HDMI connector (Type A connector) fitted at 90º angle & USB screw terminals (5 wires).
Without fixing claws.
Cover plate code: 8955.1.

Colour	Type	Order code	Pack/Qty.
	8155.78	2CLA815578A1001	1

HDMI female-female + USB connection unit with cable

Front: 1x HDMI connector (Type A connector) & 1x USB 2.0 connector (Type A connector).
Rear: 1x HDMI connector (Type A connector) fitted at 90º angle & USB screw terminals (5 wires).
Without fixing claws.
Cover plate code: 8955.1.

Colour	Type	Order code	Pack/Qty.
	8155.79	2CLA815579A1001	1

Double USB connection unit



Front: 2x USB 2.0 connector (Type A connector).
Rear: 2x USB screw terminals (5 wires).
Without fixing claws.
Cover plate code: 8955.1.

Colour	Type	Order code	Pack/Qty.
	8155.88	2CLA815588A1001	1

Cover plate 2-gangs VDI connection unit

Combination inserts 8155.68, 8155.78, 8155.79 and 8155.88

Colour	Type	Order code	Pack/Qty.
White glossy	**8955.1 BL**	2CLA895510A1101	1
White matt	**8955.1 BT**	2CLA895510A1001	1
Black matt	**8955.1 NT**	2CLA895510A1501	1
Grey matt	**8955.1 GR**	2CLA895510A1801	1

Light controls - Rotary dimmers

LED dimmer

LED dimmer With rotary control.
Two-way switch and soft-catch.
With N-terminal.
2- or 3-wire connection (neutral conductor not required).
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Very low installation depth: < 20 mm Without claws.
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection. With electronic overload protection.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz.
Nominal power (L): 2 - 100 W/VA (leading-edge control).
Nominal power (R, C): 10 - 360 W/VA (trailing-edge control).
Nominal power (LEDi): 2 - 100 W/VA (leading-edge control).
Nominal power (LEDi): 2 - 200 W/VA (trailing-edge control).

Colour	Type	Order code	Pack/Qty.
	8160.7	2CKA006512A0354	1

Rotatory dimmer, 1-10Vdc

Rated voltage: 230 V~ ; ± 10% - 50/60 Hz. Rated power: 700 W / VA.
With rotatory control. For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control drivers. Without cover plate.
Not illuminable.
Making-current limiters have to be provided in case of too high making currents.
Included: fixing claws.
Cover plate code: 8560.2.

Colour	Type	Order code	Pack/Qty.
	8160.9	2CLA816090A1001	1

Alba

Light controls - Rotary dimmers

Rotary DALI dimmer Flush-mounted, tunable white.

For DALI broadcast service (via central telegram). For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. Fool proved. For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8). Colour temperature can then be set between 2,700 K - 6,500 K. Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation. Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel.
Max.current consumption: 15 mA. Not suitable for combining with other DALI sensors or central units of other manufacturers. For the generation of the DALI voltage a power supply according to IEC 62386 is required. Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate. Cover plate code: 8960.2

Colour	Type	Order code	Pack/Qty.
	8161.6	2CKA006599A3025	1

Rotary DALI dimmer Flush-mounted, DALI, with internal power supply, tunable White

For DALI broadcast service (via central telegram). With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8). Colour temperature can then be set between 2,700 K - 6,500 K. With electronic short-circuit protection. With electronic overload protection. Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode. Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V= Rated current: max. 75 mA Power consumption: < 2,5 W Number of DALI-units: 37 in case of one active power-potentiometer in case of three active power-potentiometer in parallel connection: 111 Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices. Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²). Without cover plate. Cover plate code: 8960.2

Colour	Type	Order code	Pack/Qty.
	8161.7	2CKA006599A3026	1

Cover plate with rotatory knob for dimmer

Combination inserts: 8160.7, 8160.9, 8161.6 and 8161.7

Colour	Type	Order code	Pack/Qty.
White glossy	**8960.2 BL**	2CLA896020A1101	1
White matt	**8960.2 BT**	2CLA896020A1001	1
Black matt	**8960.2 NT**	2CLA896020A1501	1
Grey matt	**8960.2 GR**	2CLA896020A1801	1

Signaling DND/MUR

DND/MUR 2-gang switch



10 A ; 250 V~
Installation inside the room.
Gang 1: Red symbol Do Not Disturb (DND)
Gang 2: Green symbol Make Up Room (MUR)
Cover code: 8944.4

Colour	Type	Order code	Pack/Qty.
	8144.4	2CLA814440A1001	1

Bell push-button with DND/MUR LED indicator



110 A ; 250 V~
Installation outside the room.
Red light: Do Not Disturb (DND) symbol
Green light: Make Up Room (MUR) symbol.
Push button with bell symbol
Cover code: 8980.4

Colour	Type	Order code	Pack/Qty.
	8180.4	2CLA818040A1001	1

Cover plate for DND/MUR 2-gang switch

Combination insert: 8144.4

Colour	Type	Order code	Pack/Qty.
White glossy	**8944.4 BL**	2CLA894440A1101	5
White matt	**8944.4 BT**	2CLA894440A1001	5
Black matt	**8944.4 NT**	2CLA894440A1501	5
Grey matt	**8944.4 GR**	2CLA894440A1801	5

Cover plate for bell push-button with DND/MUR

Combination insert: 8180.4

Colour	Type	Order code	Pack/Qty.
White glossy	**8980.4 BL**	2CLA898040A1101	5
White matt	**8980.4 BT**	2CLA898040A1001	5
Black matt	**8980.4 NT**	2CLA898040A1501	5
Grey matt	**8980.4 GR**	2CLA898040A1801	5

Alba

FM radio with alarm Hit by Niessen

FM-radio and alarm module - 2M

Rated voltage: 230 Vac ± 15%; 50-60 Hz.
Max. consumption: 100 mA.
Stand-by consuption: 0,2W.
Amplifier power: 2+2 W; <1% distorsion (16 Ω). Speaker impedance: 16 Ω (2+2 W audio).
FM radio digital tuner with RDS.
Alarm clock with buzzer, radio types and snooze.
Optional: auxilary module 9368.3 for I/O (1 minijack stereo input & 1 mini-jack stereo output), USB connection and Bluetooth receiver functions.
Mounting grid with the cover plate.
Cover plate code: 8568.

Colour	Type	Order code	Pack/Qty.
	9368	2CLA936800A1001	1

Cover plate for radio/remote control modules

Combination insert: 9368

Colour	Type	Order code	Pack/Qty.
White glossy	**8968 BL**	2CLA896800A1101	1
White matt	**8968 BT**	2CLA896800A1001	1
Black matt	**8968 NT**	2CLA896800A1501	1
Grey matt	**8968 GR**	2CLA896800A1801	1

USB & Bluetooth® module Hit by Niessen

Input/Output USB y Bluetooth® module

Power supply trough 9368 module
Max. consumption: 200 mA
Headsets impedance: 16 ~ 600 Ω (25 + 25 mW)
Optional module for 9368
Cover code: 8968.3

Colour	Type	Order code	Pack/Qty.
	9368.3	2CLA936830A1001	1

Cover plate for USB & Bluetooth module

Combination insert: 9368.3

Colour	Type	Order code	Pack/Qty.
White glossy	**8968.3 BL**	2CLA896830A1101	1
White matt	**8968.3 BT**	2CLA896830A1001	1
Black matt	**8968.3 NT**	2CLA896830A1501	1
Grey matt	**8968.3 GR**	2CLA896830A1801	1

Bluetooth audio module

Bluetooth sound module autonomous

Rated voltage: 110-230 Vac ± 15%; 50-60 Hz
Max. consumption: 7W
Stand-by consumption: 0,2W
Amplifier power: 2+2 W; <1% distortion (16 Ω)
Speaker impedance: 16 Ω (2+2 W audio)
Audio inputs:
- Bluetooth: stereo Bluetooth® 4 version receiver with A2DP-SINK profile and memory for 8 links.
- Front input (AUX): 1x mini-jack stereo 3,5 mm.
- Rear input (TV): screw type terminal with 3 contacts (stereo).
Cover plate code: N2268.4

Colour	Type	Order code	Pack/Qty.
	9368.4	2CLA936840A1001	1

Cover plate for Bluetooth module

Combination insert 9368.4

Colour	Type	Order code	Pack/Qty.
White glossy	**8968.4 BL**	2CLA896840A1101	1
White matt	**8968.4 BT**	2CLA896840A1001	1
Black matt	**8968.4 NT**	2CLA896840A1501	1
Grey matt	**8968.4 GR**	2CLA896840A1801	1

Alba

Auxiliary amplifier

Amplificador de sonido

230 V~ ; ±10 % ; 50 / 60 Hz.
Power consuption: 3,5 VA (máx. 36 VA).
Output power: 10 + 10 W (2 Ω) ; 20 W (4 Ω).
Speakers impedance: 2 ÷16 Ω (10 + 10 W).
4 ÷ 16 Ω (20 W).
Output voltage: 15 V~ (máx. 1,5 A).
Max. amplifiers by control unit. 5 units.
DIN rail installation module width: 7.

Colour	Type	Order code	Pack/Qty.
	9335.1	2CLA933510A1001	1

Loudspeakers control

Potentiometer for loudspeakers 3W

3 W / 27 Ω
For low impedance circuits
Cover plate: 8959

Colour	Type	Order code	Pack/Qty.
	8159.3	2CLA815930A1001	1

Potentiometer for loudspeakers 5W

5 W / 47 Ω
For low impedance circuits
Cover plate: 8959

Colour	Type	Order code	Pack/Qty.
	8159.5	2CLA815950A1001	1

Cover plate for potentiometer

Combination inserts: 8159.3 and 8159.5

Colour	Type	Order code	Pack/Qty.
White glossy	**8959 BL**	2CLA895900A1101	1
White matt	**8959 BT**	2CLA895900A1001	1
Black matt	**8959 NT**	2CLA895900A1501	1
Grey matt	**8959 GR**	2CLA895900A1801	1

Loudspeakers

Loudspeaker 2” 2W



With broadband characteristics.
With screwless terminals.
Rated output: 2 W (RMS).
Frequency response: 150 - 16.000 Hz.
Impedance: 16 Ohm.
Mounting depth: 34 mm.
Cover plate code: 8929.

Colour	Type	Order code	Pack/Qty.
	9329	2CLA932900A1001	1

Cover plate for loudspeaker 2”

Combination insert: 9329

Colour	Type	Order code	Pack/Qty.
White glossy	**8929 BL**	2CLA892900A1101	1
White matt	**8929 BT**	2CLA892900A1001	1
Black matt	**8929 NT**	2CLA892900A1501	1
Grey matt	**8929 GR**	2CLA892900A1801	1

Motion sensor

Motion sensor

The motion detector is used to switch lighting systems depending on brightness and/or movement.
It is intended for indoor use only. Opening angel: 180°
Brightness value: 5 … 500 lux, daytime operation.
Disconnetion delay:
*10 seconds … 30 minutes.
*Short duration pulse 1 second
Mounting height: 0,8 m … 1,2 m
Protection: IP20
Temperature range: -5 °C … +45 °C
Storage temperature: -25 °C … +70 °C
Cover code: 8941.2

Colour	Type	Order code	Pack/Qty.
	8141.2	2CKA008600A3042	1

Cover plate for motion sensor

Combination insert: 8141.2

Colour	Type	Order code	Pack/Qty.
White glossy	**8941.2 BL**	2CKA008600A3149	1
White matt	**8941.2 BT**	2CKA008600A3148	1
Black matt	**8941.2 NT**	2CKA008600A3150	1
Grey matt	**8941.2 GR**	2CKA008600A3151	1

Alba

Touch display 2,4” ABB-free@home® / ABB i-bus® KNX”

Touch display ABB-free@home ® / ABB i-bus® KNX

Touch display programmable compatible for both ABB-free@home® / ABB i-bus®KNX systems.
For the control of the standard functions: on/off, regulation, blinds, RTC,scenes, etc. Programmable with up to 12 functions. With proximity and brightness sensor. Haptic and primary function when you enter in the room.

Colour	Type	Order code	Pack/Qty.
Black glass	**SD/U12.70.1-825**	2TMA310011B0004	1

Touch display ABB-free@home ® / ABB i-bus® KNX

Touch display programmable compatible for both ABB-free@home® / ABB i-bus®KNX systems.
For the control of the standard functions: on/off, regulation, blinds, RTC,scenes, etc. Programmable with up to 12 functions. With proximity and brightness sensor. Haptic and primary function when you enter in the room.

Colour	Type	Order code	Pack/Qty.
White glass	**RT/U12.86.1-811**	2TMA310011W0001	1
Black glass	**RT/U12.86.1-825**	2TMA310011B0003	1

Touch sensors ABB-free@home® / ABB i-bus® KNX

Bus coupler ABB-free@home® with control element for 1,2, 3, 4 and customizable rockers

Control of standard functions by pressing or sliding: On/off, regulation, blind, scene. It also includes primary function, temperature sensor integrated, acoustic feedback, function/state support via innovative RGB light guide concept, day/night mode, orientation light, alarm function via light guides and acoustic feedback. Ambient temperature: (operation) -5 ... +45 °C. Installation depth: 33 mm
Protection grade: IP20. Number of actuation points: 4
Number of LEDs: 8

Colour	Type	Order code	Pack/Qty.
Black glass	**9697.30**	2CLA969730W1001	1

Bus coupler ABB i-bus® KNX with control element for 1,2, 3, 4 and customizable rockers

Control of standard functions by pressing or sliding: On/off, regulation, blind, scene. It also includes primary function, temperature sensor integrated, acoustic feedback, function/state support via innovative RGB light guide concept, day/night mode, orientation light, alarm function via light guides and acoustic feedback KNX functions: 5 logical channels: light scene actuator, logic gate, etc.), sequencer, ladder function. Ambient temperature: (operation) -5 ... +45 °C. Installation depth: 33mm.
Protection grade: IP20. Number of actuation points: 4
Number of LEDs: 8

Colour	Type	Order code	Pack/Qty.
Black glass	**9697.20**	2CLA969720W1001	1

Rocker 1 channel without symbol

For touch sensor 1 channel ref. 9697.30 (ABB-free@home®).
For touch sensor 1 channel ref. 9697.20 (ABB i-bus® KNX)

Colour	Type	Order code	Pack/Qty.
White glossy	**8997.01 BL**	2CKA006199A0435	1
White matt	**8997.01 BT**	2CKA006199A0451	1
Black matt	**8997.01 NT**	2CKA006199A0483	1
Grey matt	**8997.01 GR**	2CKA006199A0520	1

Rocker 3 channels without symbol

For bus coupler ref. 9697.30 (ABB-free@home®)
For bus coupler ref. 9697.20 (ABB i-bus® KNX)

Colour	Type	Order code	Pack/Qty.
White glossy	**8997.03 BL**	2CKA006199A0437	1
White matt	**8997.03 BT**	2CKA006199A0453	1
Black matt	**8997.03 NT**	2CKA006199A0485	1
Grey matt	**8997.03 GR**	2CKA006199A0522	1

Rocker 1 channel with light symbol

For bus coupler ref. 9697.30 (ABB-free@home®)
For bus coupler ref. 9697.20 (ABB i-bus® KNX)

Colour	Type	Order code	Pack/Qty.
White glossy	**8997.11 BL**	2CKA006199A0439	1
White matt	**8997.11 BT**	2CKA006199A0455	1
Black matt	**8997.11 NT**	2CKA006199A0487	1
Grey matt	**8997.11 GR**	2CKA006199A0524	1

Rocker 1 channel with scene symbol

For bus coupler ref. 9697.30 (ABB-free@home®)
For bus coupler ref. 9697.20 (ABB i-bus® KNX)

Colour	Type	Order code	Pack/Qty.
White glossy	**8997.14 BL**	2CKA006199A0441	1
White matt	**8997.14 BT**	2CKA006199A0457	1
Black matt	**8997.14 NT**	2CKA006199A0489	1
Grey matt	**8997.14 GR**	2CKA006199A0526	1

Alba

Touch sensors ABB-free@home® / ABB i-bus® KNX

Rocker 2 channels with blind symbol

For bus coupler ref. 9697.30 (ABB-free@home®)
For bus coupler ref. 9697.20 (ABB i-bus® KNX)

Colour	Type	Order code	Pack/Qty.
White glossy	**8997.22 BL**	2CKA006199A0449	1
White matt	**8997.22 BT**	2CKA006199A0465	1
Black matt	**8997.22 NT**	2CKA006199A0497	1
Grey matt	**8997.22 GR**	2CKA006199A0534	1

Rocker 2 channels without symbol

For touch sensor 2 channels ref. 9697.30 (ABB-free@home®) For touch sensor 2 channels ref. 9697.20 (ABB i-bus® KNX)

Colour	Type	Order code	Pack/Qty.
White glossy	**8997.02 BL**	2CKA006199A0436	1
White matt	**8997.02 BT**	2CKA006199A0452	1
Black matt	**8997.02 NT**	2CKA006199A0484	1
Grey matt	**8997.02 GR**	2CKA006199A0521	1

Rocker 4 channels without symbol

For bus coupler ref. 9697.30 (ABB-free@home®)
For bus coupler ref. 9697.20 (ABB i-bus® KNX)

Colour	Type	Order code	Pack/Qty.
White glossy	**8997.04 BL**	2CKA006199A0438	1
White matt	**8997.04 BT**	2CKA006199A0454	1
Black matt	**8997.04 NT**	2CKA006199A0486	1
Grey matt	**8997.04 GR**	2CKA006199A0523	1

Rocker 1 channel with blind symbol

For bus coupler ref. 9697.30 (ABB-free@home®)
For bus coupler ref. 9697.20 (ABB i-bus® KNX)

Colour	Type	Order code	Pack/Qty.
White glossy	**8997.12 BL**	2CKA006199A0443	1
White matt	**8997.12 BT**	2CKA006199A0459	1
Black matt	**8997.12 NT**	2CKA006199A0491	1
Grey matt	**8997.12 GR**	2CKA006199A0528	1

Rocker 2 channels with light/blind symbol

For bus coupler ref. 9697.30 (ABB-free@home®)
For bus coupler ref. 9697.20 (ABB i-bus® KNX)

Colour	Type	Order code	Pack/Qty.
White glossy	**8997.21 BL**	2CKA006199A0448	1
White matt	**8997.21 BT**	2CKA006199A0464	1
Black matt	**8997.21 NT**	2CKA006199A0496	1
Grey matt	**8997.21 GR**	2CKA006199A0533	1

Customizable rocker for touch sensor

For bus coupler ref. 9697.30 (ABB-free@home®)
For bus coupler ref. 9697.20 (ABB i-bus® KNX)
Customizable rocker for icons design trough website.

Colour	Type	Order code	Pack/Qty.
White glossy	**8997P**	2CKA006199A0025	1

Alba
Frames

White glossy frames

1 gang: 85 x 85 mm.
2 gang: 85 x 156,1 mm.
3 gang: 85 x 227,2 mm.
4 gang: 85 x 298,3 mm.

Colour	Type	Order code	Pack/Qty.
1 gang	**8971 BL**	2CLA897100A1101	20
2 gang	**8972 BL**	2CLA897200A1101	20
3 gang	**8973 BL**	2CLA897300A1101	10
4 gang	**8974 BL**	2CLA897400A1101	5

White matt frames

1 gang: 85 x 85 mm.
2 gang: 85 x 156,1 mm.
3 gang: 85 x 227,2 mm.
4 gang: 85 x 298,3 mm.

Colour	Type	Order code	Pack/Qty.
1 gang	**8971 BT**	2CLA897100A1001	20
2 gang	**8972 BT**	2CLA897200A1001	20
3 gang	**8973 BT**	2CLA897300A1001	10
4 gang	**8974 BT**	2CLA897400A1001	5

Black matt frames

1 gang: 85 x 85 mm.
2 gang: 85 x 156,1 mm.
3 gang: 85 x 227,2 mm.
4 gang: 85 x 298,3 mm.

Colour	Type	Order code	Pack/Qty.
1 gang	**8971 NT**	2CLA897100A1501	20
2 gang	**8972 NT**	2CLA897200A1501	10
3 gang	**8973 NT**	2CLA897300A1501	10
4 gang	**8974 NT**	2CLA897400A1501	5

Grey matt frames

1 gang: 85 x 85 mm.
2 gang: 85 x 156,1 mm.
3 gang: 85 x 227,2 mm.
4 gang: 85 x 298,3 mm.

Colour	Type	Order code	Pack/Qty.
1 gang	**8971 GR**	2CLA897100A1801	20
2 gang	**8972 GR**	2CLA897200A1801	10
3 gang	**8973 GR**	2CLA897300A1801	10
4 gang	**8974 GR**	2CLA897400A1801	5

White glass frames

1 gang: 85 x 85 mm.
2 gang: 85 x 156,1 mm.
3 gang: 85 x 227,2 mm.
4 gang: 85 x 298,3 mm.

Colour	Type	Order code	Pack/Qty.
1 gang	**8971 CB**	2CLA897100A3001	1
2 gang	**8972 CB**	2CLA897200A3001	1
3 gang	**8973 CB**	2CLA897300A3001	1
4 gang	**8974 CB**	2CLA897400A3001	1

Black glass frames

1 gang: 85 x 85 mm.
2 gang: 85 x 156,1 mm.
3 gang: 85 x 227,2 mm.
4 gang: 85 x 298,3 mm.

Colour	Type	Order code	Pack/Qty.
1 gang	**8971 CN**	2CLA897100A3101	1
2 gang	**8972 CN**	2CLA897200A3101	1
3 gang	**8973 CN**	2CLA897300A3101	1
4 gang	**8974 CN**	2CLA897400A3101	1

Stainless Steel frames

1 gang: 85 x 85 mm.
2 gang: 85 x 156,1 mm.
3 gang: 85 x 227,2 mm.
4 gang: 85 x 298,3 mm.

Colour	Type	Order code	Pack/Qty.
1 gang	**8971 AI**	2CLA897100A1401	1
2 gang	**8972 AI**	2CLA897200A1401	1
3 gang	**8973 AI**	2CLA897300A1401	1
4 gang	**8974 AI**	2CLA897400A1401	1

Sky Niessen

Touch your imagination.

A light switch range offering a minimalistic design. Very slim and balanced. Distinct materials like glass, stainless steel, ash wood or more modest options; all guaranteeing quality. An object of desire, a jewel to decorate the most exclusive of environments. Feel special every day, feel the sky in your hands with Niessen switches.

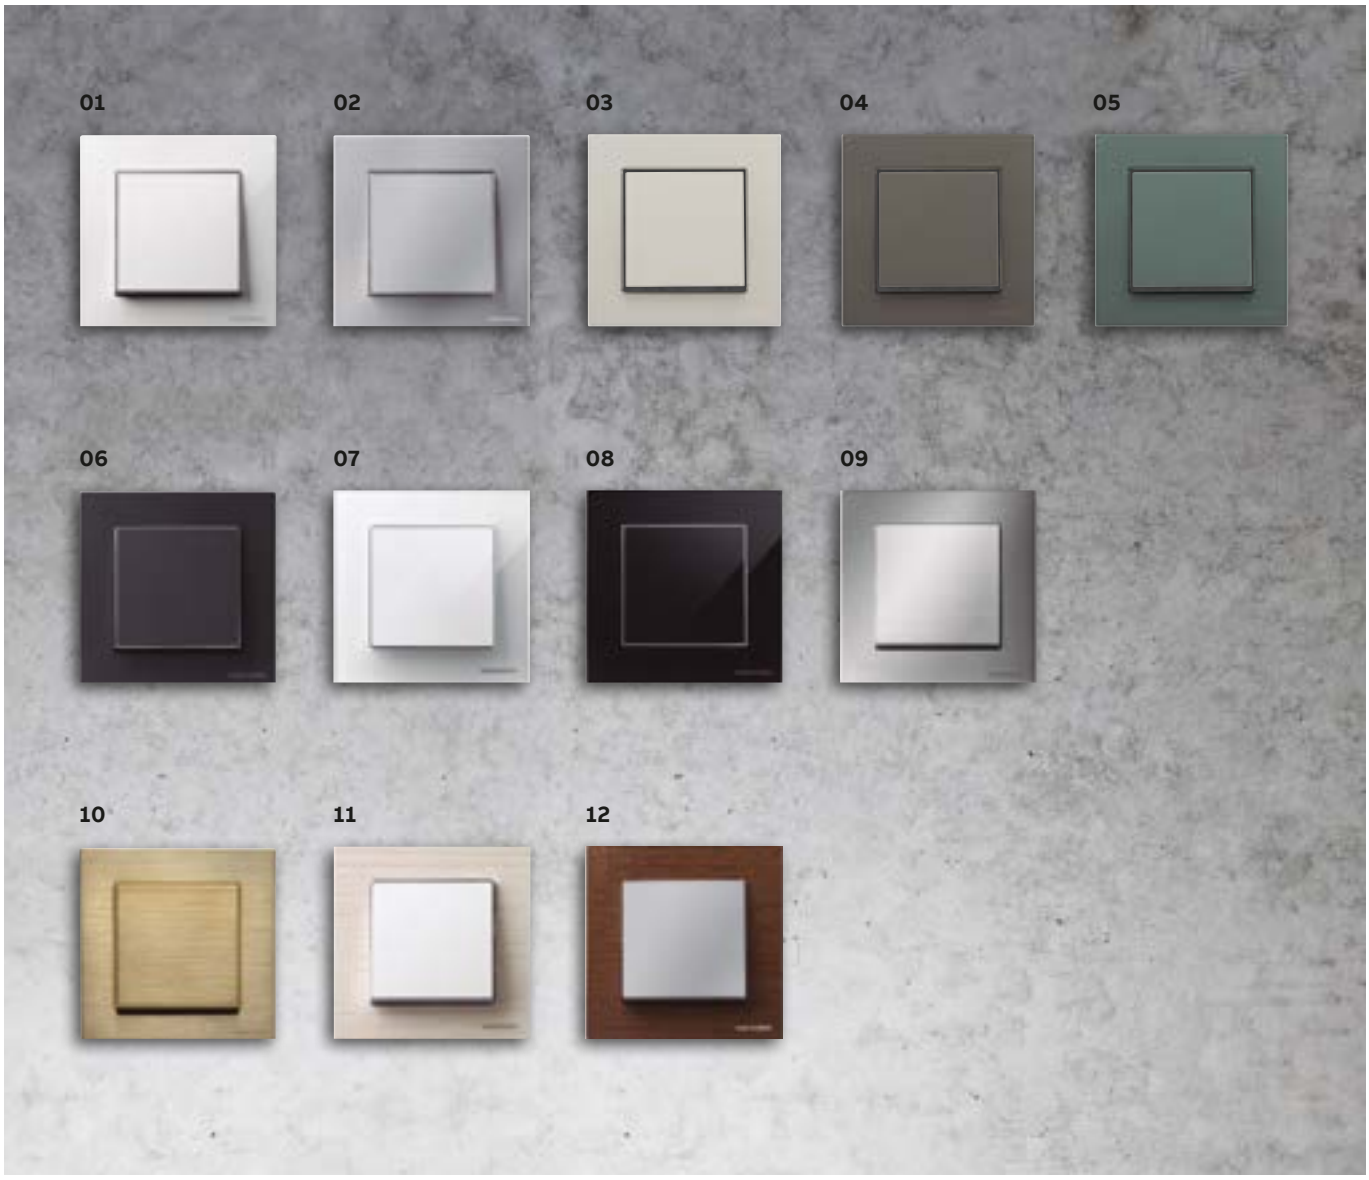

01 soft white & white essence
02 silver
03 dune
04 taupé
05 comodoro
06 soft black & black essence
07 white glass
08 black glass
09 stainless steel
10 antic gold
11 ash frame - white switch
12 natural wenge frame - silver switch

Sky Niessen

Selected functions.

01

02

03

04

05

06

07

08

09

10

11

12

13

14

01 Stand-alone FM radio and alarm
02 Loudspeaker 2"
03 Universal push dimmer
04 LED rotary dimmer
05 ABB-free@home® movement detector
06 ABB-free@home® room thermostat
07 ABB-free@home® sensors
08 Card switch
09 Digital timer control
10 Schuko SO + USB type A chargers
11 USB charger outlet
12 SCHUKO® socket outlet with lamp
13 Movement detector
14 VDI connectors (HDMI+USB)

01 **02**

03

04

05

06

Sky Niessen
1- to 5-gang cover frame
01 Side view, 8,5 x 86 mm
02 86 x 86 mm
03 86 x 157 mm
04 86 x 228 mm
05 84 mm x 299 mm
06 84 mm x 370 mm

For more information about light switch ranges visit ABB global web sites.

Sky Niessen

Slim, balanced, perfect.

At just 8.5 mm thick, Sky Niessen barely protrudes from the wall. Thanks to the use of subtle components, with Sky Niessen you will achieve a visual perception of perfection in the decoration of any room.

Maximum slimness 8.5 mm

Chrome plated trim

Display Lighting in white

High-quality and durable finishes

Gold plated trim. Antique gold finish

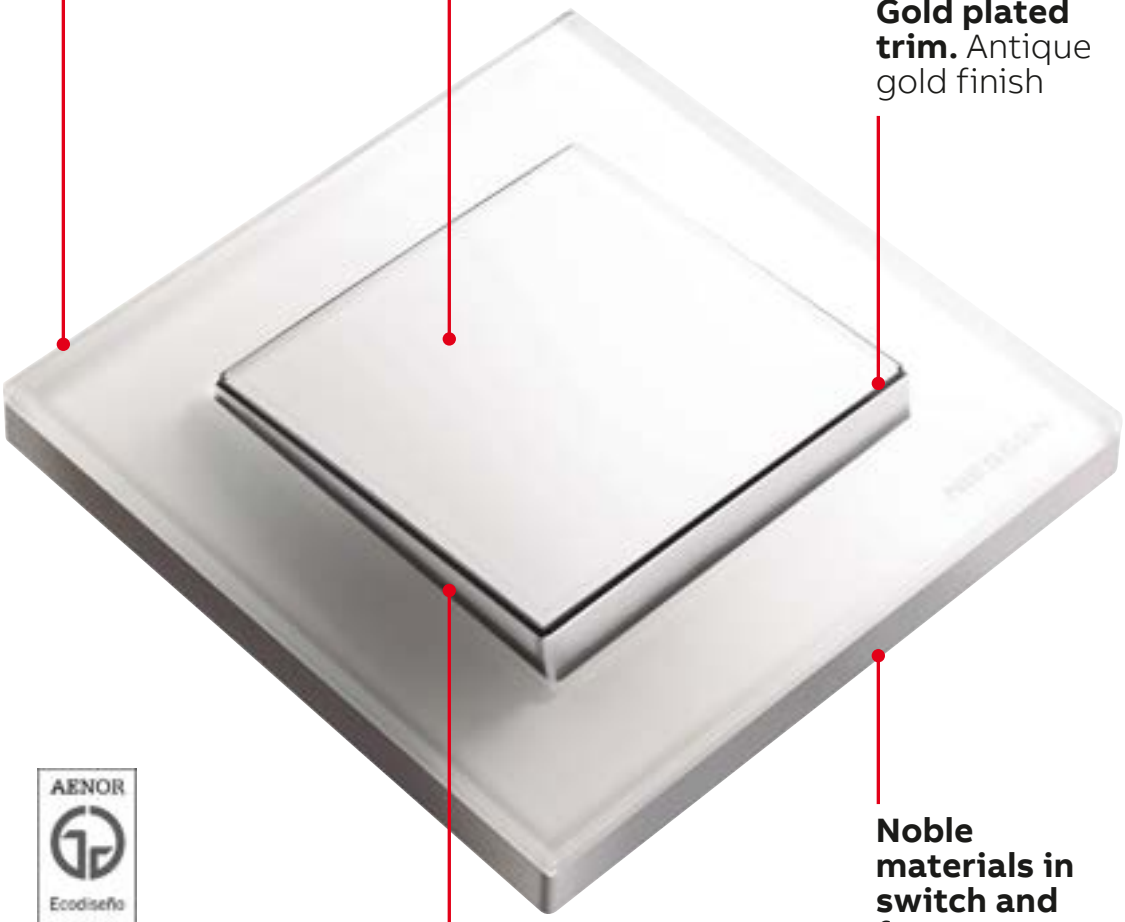

Noble materials in switch and frame

Minimum gap between switch and frame

Eco-design
The Sky Niessen switch range has been designed following the Product Design and Development Environmental Management regulations: Eco-design.

Sky Niessen series

With Sky Niessen you can offer a higher level of design in your reform projects. Quick and easy, as it perfectly adapts to other installations done with Niessen. The use of Niessen's luxury insert facilitates the installation and renovation of each room.

Switch composition

Insert Frame Rocker

Socket composition

Insert Frame Cover

Characteristics
• 250 V~
• 10 AX / 16 AX
• IP21
• CE Compliance Declaration pursuant to: - Low Voltage Directive 2006/95/CE - European Directive RoHS 2011/65/EU - IEC 60669-1 - UNE-EN 60669-1 - UNE 20324-REBT-BT27 - IP21
• AENOR certified product pursuant to: - UNE-EN 60669-1 - UNE-EN 60669-1/A1 - UNE-EN 60669-1/A2

Characteristics
• 250 V~
• 16 A
• IP21
• Compliant with standards: - European Directive RoHS 2011/65/EU - IEC 60884-1 - UNE-EN 20315 - UNE 20324-REBT-BT27 - IP21
• AENOR certified product pursuant to: - UNE 20315-1-1

Sky Niessen

1-way switches

Switch 1-gang, 1-way, single pole



Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
200 W SBL: LEDi, CFLi
Screwless terminals.
8101 without fixing claws - 8101.8 with claws
Optional: locator LED lamp 6192 BL (230 Vac).
Rocker code: 8501, 8501.2, 8501.3 & 8501.4.

Colour	Type	Order code	Pack/Qty.
	8101	2CLA810100A1001	10
	8101.8	2CLA810180A1001	10

2-way switches

Switch 1-gang, 2-way, single pole



Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
200 W SBL: LEDi, CFLi
Screwless terminals.
8102 without fixing claws - 8102.8 with fixing claws
Optional: locator LED lamp 6192 BL (230 Vac).
Rocker code: 8501, 8501.2, 8501.3 & 8501.4.

Colour	Type	Order code	Pack/Qty.
	8102	2CLA810200A1001	10
	8102.8	2CLA810280A1001	10

Switch 1-gang, 2-way, single pole 16A

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
200 W SBL: LEDi, CFLi
Screwless terminals.
Included: fixing claws.
Optional: locator LED lamp 6192 BL (230 Vac).
Rocker code: 8501, 8501.2, 8501.3 & 8501.4.

Colour	Type	Order code	Pack/Qty.
	8102.1	2CLA810210A1001	10

Intermediate switches

Switch 1-gang, intermediate, single pole



Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
200 W SBL: LEDi, CFLi
Screwless terminals.
Included: fixing claws.
Optional: locator LED lamp 6192 BL (230 Vac).
Rocker code: 8501, 8501.2, 8501.3 & 8501.4.

Colour	Type	Order code	Pack/Qty.
	8110	2CLA811000A1001	10

Double pole switches

Switch 1-gang, 1-way, double pole 16A

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Screwless terminals.
Included: fixing claws.
Optional: locator/indicator LED lamp 6192 BL (230 Vac).
Rocker code: 8501, 8501.2, 8501.3 & 8501.4.

Colour	Type	Order code	Pack/Qty.
	8101.1	2CLA810110A1001	10

Switch 1-gang, 1-way, double pole

Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
Screwless terminals.
Included: fixing claws.
Optional: locator/indicator LED lamp 6192 BL (230 Vac).
Rocker code: 8501, 8501.2, 8501.3 & 8501.4.

Colour	Type	Order code	Pack/Qty.
	8101.2	2CLA810120A1001	10

Switches with indicator lamp

Switch 1-gang, 1-way, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
200 W SBL: LEDi, CFLi
Screwless terminals.
Included: fixing claws.
3 wire connection (neutral conductor required).
Included: indicator LED lamp 6192 BL (230 Vac).
Rocker code: 8501.3 & 8501.4.

Colour	Type	Order code	Pack/Qty.
	8101.5	2CLA810150A1001	10

Switch 1-gang, 2-way, single pole



Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
200 W SBL: LEDi, CFLi
Screwless terminals.
Included: fixing claws.
4 wire connection (neutral conductor required).
Indicator: indicator LED lamp 6192 BL (230 Vac).
Rocker code: 8501.3 & 8501.4.

Colour	Type	Order code	Pack/Qty.
	8102.5	2CLA810250A1001	10

Sky Niessen
Push-buttons

Push-button 1-gang, single pole, NO



Rated voltage: 110 - 250 Vac.
Rated current: 10 AX. NO: Normally Open.
Screwless terminals.
8104 without fixing claws - 8104.8 with fixing claws
Optional: locator LED lamp 6192 BL (230 Vac).
Rocker code: 8501, 8501.3, 8504, 8504.2, 8504.3 & 8504.4.

Colour	Type	Order code	Pack/Qty.
	8104	2CLA810400A1001	10
	8104.8	2CLA810480A1001	10

Push-button 1-gang, SP, NO w/ locator lamp



Rated voltage: 110 - 250 Vac.
Rated current: 10 AX. NO: Normally Open.
Screwless terminals. Included: fixing claws.
3 wire connection (neutral conductor required).
Included: locator LED lamp 6192 BL (230 Vac).
Rocker code: 8501.3, 8504.3 & 8504.4.

Colour	Type	Order code	Pack/Qty.
	8104.5	2CLA810450A1001	10

Push-button 1-gang, single pole, NC



Rated voltage: 110 - 250 Vac.
Rated current: 10AX. NC: normally closed.
Screwless terminals. Included: fixing claws.
Optional: locator LED lamp 6192 BL (230 Vac).
Rocker code: 8501, 8501.3, 8504, 8504.2,
8504.3 & 8504.4.

Colour	Type	Order code	Pack/Qty.
	8104.9	2CLA810490A1001	5

Rockers for switches and push-buttons

Rocker for switch, 1-gang

Rocker for switches code:
8101, 8101.1, 8101.2, 8102, 8102.1 & 8110.

Colour	Type	Order code	Pack/Qty.
Soft White	**8501 BL**	2CLA850100A1101	20
White essence	**8501 BE**	2CLA850100A5101	20
Silver	**8501 PL**	2CLA850100A1301	20
Soft Black	**8501 NS**	2CLA850100A1501	20
Black essence	**8501 NE**	2CLA850100A1701	20
Dune	**8501 DN**	2CLA850100A6201	20
Taupé	**8501 TP**	2CLA850100A6301	20
Comodoro	**8501 CM**	2CLA850100A1901	20
Antique Gold	**8501 OE**	2CLA850100A1201	20
Stainless Steel	**8501 AI**	2CLA850100A1401	20
White Glass	**8501 CB**	2CLA850100A2101	10
Black Glass	**8501 CN**	2CLA850100A2501	10

Rocker with On/Off symbol, 1-gang

Rocker for switches code:
8101, 8101.1, 8101.2, 8102, 8102.1 & 8110.

Colour	Type	Order code	Pack/Qty.
Soft White	**8501.2 BL**	2CLA850120A1101	5
White essence	**8501.2 BE**	2CLA850120A5101	5
Silver	**8501.2 PL**	2CLA850120A1301	5
Soft Black	**8501.2 NS**	2CLA850120A1501	5
Black essence	**8501.2 NE**	2CLA850120A1701	5
Dune	**8501.2 DN**	2CLA850120A6201	5
Taupé	**8501.2 TP**	2CLA850120A6301	5
Comodoro	**8501.2 CM**	2CLA850120A1901	5
Stainless Steel	**8501.2 AI**	2CLA850120A1401	5
Antique Gold	**8501.2 OE**	2CLA850120A1201	5

Rocker for switch with lens, 1-gang

Rocker for switches code:
8101, 8101.1, 8101.2, 8101.5, 8102, 8102.1, 8102.5 & 8110.

Colour	Type	Order code	Pack/Qty.
Soft White	**8501.3 BL**	2CLA850130A1101	10
White essence	**8501.3 BE**	2CLA850130A5101	10
Silver	**8501.3 PL**	2CLA850130A1301	10
Soft Black	**8501.3 NS**	2CLA850130A1501	10
Black essence	**8501.3 NE**	2CLA850130A1701	10
Dune	**8501.3 DN**	2CLA850130A6201	10
Taupé	**8501.3 TP**	2CLA850130A6301	10
Comodoro	**8501.3 CM**	2CLA850130A1901	10
Stainless Steel	**8501.3 AI**	2CLA850130A1401	10
Antique Gold	**8501.3 OE**	2CLA850130A1201	10
White Glass	**8501.3 CB**	2CLA850130A2101	5
Black Glass	**8501.3 CN**	2CLA850130A2501	5

Sky Niessen

Rockers with symbols

Rocker with lens & On/Off symbol, 1-gang

Rocker for switches code: 8101, 8101.1, 8101.2, 8101.5, 8102, 8102.1, 8102.5 & 8110.

Colour	Type	Order code	Pack/Qty.
Soft White	**8501.4 BL**	2CLA850140A1101	5
White essence	**8501.4 BE**	2CLA850140A5101	5
Silver	**8501.4 PL**	2CLA850140A1301	5
Soft Black	**8501.4 NS**	2CLA850140A1501	5
Black essence	**8501.4 NE**	2CLA850140A1701	5
Dune	**8501.4 DN**	2CLA850140A6201	5
Taupé	**8501.4 TP**	2CLA850140A6301	5
Comodoro	**8501.4 CM**	2CLA850140A1901	5
Stainless Steel	**8501.4 AI**	2CLA850140A1401	5
Antique Gold	**8501.4 OE**	2CLA850140A1201	5

Rocker with bell symbol, 1-gang

Rocker for push-buttons code: 8104 & 8104.9.

Colour	Type	Order code	Pack/Qty.
Soft White	**8504 BL**	2CLA850400A1101	10
White essence	**8504 BE**	2CLA850400A5101	10
Silver	**8504 PL**	2CLA850400A1301	10
Soft Black	**8504 NS**	2CLA850400A1501	10
Black essence	**8504 NE**	2CLA850400A1701	10
Stainless Steel	**8504 AI**	2CLA850400A1401	10
Dune	**8504 DN**	2CLA850400A6201	10
Taupé	**8504 TP**	2CLA850400A6301	10
Comodoro	**8504 CM**	2CLA850400A1901	10
Antique Gold	**8504 OE**	2CLA850400A1201	10

Rocker with light symbol, 1-gang

Rocker for push-buttons code: 8104 & 8104.9.

Colour	Type	Order code	Pack/Qty.
Soft White	**8504.2 BL**	2CLA850420A1101	10
White essence	**8504.2 BE**	2CLA850420A5101	10
Silver	**8504.2 PL**	2CLA850420A1301	10
Soft Black	**8504.2 NS**	2CLA850420A1501	10
Black essence	**8504.2 NE**	2CLA850420A1701	10
Dune	**8504.2 DN**	2CLA850420A6201	10
Taupé	**8504.2 TP**	2CLA850420A6301	10
Comodoro	**8504.2 CM**	2CLA850420A1901	10
Stainless Steel	**8504.2 AI**	2CLA850420A1401	10
Antique Gold	**8504.2 OE**	2CLA850420A1201	10

Rocker with bell symbol & lens, 1-gang

Rocker for push-buttons code: 8104, 8104.5 & 8104.9.

Colour	Type	Order code	Pack/Qty.
Soft White	**8504.3 BL**	2CLA850430A1101	5
White essence	**8504.3 BE**	2CLA850430A5101	5
Silver	**8504.3 PL**	2CLA850430A1301	5
Soft Black	**8504.3 NS**	2CLA850430A1501	5
Black essence	**8504.3 NE**	2CLA850430A1701	5
Dune	**8504.3 DN**	2CLA850430A6201	5
Taupé	**8504.3 TP**	2CLA850430A6301	5
Comodoro	**8504.3 CM**	2CLA850430A1901	5
Stainless Steel	**8504.3 AI**	2CLA850430A1401	5
Antique Gold	**8504.3 OE**	2CLA850430A1201	5

Rocker with light symbol & lens, 1-gang

Rocker for push-buttons code: 8104, 8104.5 & 8104.9.

Colour	Type	Order code	Pack/Qty.
Soft White	**8504.4 BL**	2CLA850440A1101	5
White essence	**8504.4 BE**	2CLA850440A5101	5
Silver	**8504.4 PL**	2CLA850440A1301	5
Soft Black	**8504.4 NS**	2CLA850440A1501	5
Black essence	**8504.4 NE**	2CLA850440A1701	5
Dune	**8504.4 DN**	2CLA850440A6201	5
Taupé	**8504.4 TP**	2CLA850440A6301	5
Comodoro	**8504.4 CM**	2CLA850440A1901	5
Stainless Steel	**8504.4 AI**	2CLA850440A1401	5
Antique Gold	**8504.4 OE**	2CLA850440A1201	5

Indicator / locator LED lamp

Indicator/locator LED lamp 230Vac

For 81XX inserts.
Lamp: white LED.
Long life cycle.
Two functions: indicator or locator light.
Power consumption: 0,2 mA.
Especially recommended for LED and energy saving lamps.

Colour	Type	Order code	Pack/Qty.
	6192 BL	2CLA819202A1001	10

Sky Niessen

2-gang switches & push-buttons

Switch 2-gangs, 1-way, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
200 W SBL: LEDi, CFLi
Screwless terminals.
Included: fixing claws.
Rocker code: 8511.

Colour	Type	Order code	Pack/Qty.
	8111	2CLA811100A1001	10

Switch 2-gangs, 2-way, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
200 W SBL: LEDi, CFLi
Screwless terminals.
Included: fixing claws.
Rocker code: 8511.

Colour	Type	Order code	Pack/Qty.
	8122	2CLA812200A1001	10

Push-button 2-gangs, single pole, NO

Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
Screwless terminals.
Without interlock.
Included: fixing claws.
Rocker code: 8511.

Colour	Type	Order code	Pack/Qty.
	8144.2	2CLA814420A1001	10

Switch 2-way + push button 1-way RIGHT NO, SP

Rated voltage: 110 - 250 Vac.
200 W SBL: LEDi, CFLi
Rated current: 10 AX.
Screwless terminals.
Included: fixing claws.
Rocker code: 8511 & 8542.

Colour	Type	Order code	Pack/Qty.
	8142	2CLA814200A1001	10

Push button 1-way LEFT NO + switch 2-way, SP

Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
200 W SBL: LEDi, CFLi
Screwless terminals.
Included: fixing claws.
Rocker code: 8511 & 8542.

Colour	Type	Order code	Pack/Qty.
	8142.1	2CLA814210A1001	10

Rocker for switch/push-button, 2-gangs

Rocker for switch/push-buttons code:
8111, 8122, 8144.2 & 8142.

Colour	Type	Order code	Pack/Qty.
Soft White	**8511 BL**	2CLA851100A1101	20
White essence	**8511 BE**	2CLA851100A5101	20
Silver	**8511 PL**	2CLA851100A1301	20
Soft Black	**8511 NS**	2CLA851100A1501	20
Black essence	**8511 NE**	2CLA851100A1701	20
Dune	**8511 DN**	2CLA851100A6201	20
Taupé	**8511 TP**	2CLA851100A6301	20
Comodoro	**8511 CM**	2CLA851100A1901	20
Stainless Steel	**8511 AI**	2CLA851100A1401	20
Antique Gold	**8511 OE**	2CLA851100A1201	20
White Glass	**8511 CB**	2CLA851100A2101	10
Black Glass	**8511 CN**	2CLA851100A2501	10

Sky Niessen
Card switches

Card switch 1-gang, 1-way, double pole

Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
For 54mm width cards.
Included: fixing claws.
Included: locator LED lamp 6192 BL (230 Vac).
Cover plate code: 8514.

Colour	Type	Order code	Pack/Qty.
	8114	2CLA811400A1001	10

Card switch 1-gang, 1-way, double pole 16A



Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
For 54mm width cards.
Included: fixing claws.
Included: locator LED lamp 6192 BL (230 Vac).
Cover plate code: 8514.

Colour	Type	Order code	Pack/Qty.
	8114.1	2CLA811410A1001	10

Card switch 1-gang, 2-way, double pole

Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
For 54mm width cards.
Included: fixing claws.
Included: locator LED lamp 6192 BL (230 Vac).
Cover plate code: 8514.

Colour	Type	Order code	Pack/Qty.
	8114.2	2CLA811420A1001	10

Card switch 1-gang, 1-way, SP w/ time delay

Rated voltage: 110 - 250 Vac ; 50 / 60 Hz.
Rated current:
- Incandescent/halogen: 3.000W@230Vac / 1.600W@127Vac.
- Fluorescent: 1.300VA@230Vac / 700VA@127Vac.
- Electronic and ferromag. transf. and motors: 3.000VA@230Vac / 1.600VA@127Vac.
3 wire connection (neutral conductor required).
For 54 mm. width cards.
Locator LED lamp included.
Time delayed switch: 5 - 90 seconds.
Cover plate code: 8514.

Colour	Type	Order code	Pack/Qty.
	8114.5	2CLA811450A1001	1

Cover plate for card switch with lens

Cover plate for card switch code:
8114, 8114.1, 8114.2 & 8114.5.

Colour	Type	Order code	Pack/Qty.
Soft White	**8514 BL**	2CLA851400A1101	10
White essence	**8514 BE**	2CLA851400A5101	10
Silver	**8514 PL**	2CLA851400A1301	10
Soft Black	**8514 NS**	2CLA851400A1501	10
Black essence	**8514 NE**	2CLA851400A1701	20
Dune	**8514 DN**	2CLA851400A6201	10
Taupé	**8514 TP**	2CLA851400A6301	10
Comodoro	**8514 CM**	2CLA851400A1901	10
Stainless Steel	**8514 AI**	2CLA851400A1401	10
Antique Gold	**8514 OE**	2CLA851400A1201	10

Sky Niessen
Key switches

Key switch 1-way, 2 positions, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 5 A.
Key removable in the 2 positions.
Unique key for each lock.
Suitable for alarms.
Cover plate code: 8553.

Colour	Type	Order code	Pack/Qty.
	8153	2CLA815300A1001	1

Key push button 1-way, 2 positions, SP

Rated voltage: 110 - 250 Vac.
Rated current: 5 A.
Key removable in “OFF” position.
Unique key for each lock.
Suitable for alarms.
Cover plate code: 8553.

Colour	Type	Order code	Pack/Qty.
	8153.2	2CLA815320A1001	1

Cover plate for 2 position key switch

Cover plate for key switch code: 8153 & 8153.2.

Colour	Type	Order code	Pack/Qty.
Soft White	**8553 BL**	2CLA855300A1101	1
White w/o chrome	**8553 BB**	2CLA855300A4101	1
Silver	**8553 PL**	2CLA855300A1301	1
Soft Black	**8553 NS**	2CLA855300A1501	1
Dune	**8553 DN**	2CLA855300A6201	1
Taupé	**8553 TP**	2CLA855300A6301	1
Comodoro	**8553 CM**	2CLA855300A1901	1
Stainless Steel	**8553 AI**	2CLA855300A1401	1
Antique Gold	**8553 OE**	2CLA855300A1201	1

Key switch 2-way, 3 positions, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 150 mA.
Key removable in “OFF” position.
Unique key for each lock.
Suitable for blinds, shutters, etc.
Cover plate code: 8553.1.

Colour	Type	Order code	Pack/Qty.
	8153.1	2CLA815310A1001	1

Cover plate for 3 position key switch

Cover plate for key switch code: 8153.1.

Colour	Type	Order code	Pack/Qty.
Soft White	**8553.1 BL**	2CLA855310A1101	1
White w/o chrome	**8553.1 BB**	2CLA855310A4101	1
Silver	**8553.1 PL**	2CLA855310A1301	1
Soft Black	**8553.1 NS**	2CLA855310A1501	1
Dune	**8553.1 DN**	2CLA855310A6201	1
Taupé	**8553.1 TP**	2CLA855310A6301	1
Comodoro	**8553.1 CM**	2CLA855310A1901	1
Stainless Steel	**8553.1 AI**	2CLA855310A1401	1
Antique Gold	**8553.1 OE**	2CLA855310A1201	1

Sky Niessen
Blind controls

Push-button blind control 2-gangs

Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
Direct control.
Interlocked gangs.
Included: fixing claws.
Rocker code: 8544.

Colour	Type	Order code	Pack/Qty.
	8144	2CLA814400A1001	10

Switch blind control 2-gangs



Rated voltage: 110 - 250 Vac.
Rated current: 10 AX.
Direct control.
Interlocked gangs.
Included: fixing claws.
Rocker code: 8544.

Colour	Type	Order code	Pack/Qty.
	8144.1	2CLA814410A1001	10

Rocker for blind switch/push-button

Rocker for blind switch/push-button code: 8144 & 8144.1.

Colour	Type	Order code	Pack/Qty.
Soft White	**8544 BL**	2CLA854400A1101	10
White essence	**8544 BE**	2CLA854400A5101	10
Silver	**8544 PL**	2CLA854400A1301	10
Soft Black	**8544 NS**	2CLA854400A1501	10
Black essence	**8544 NE**	2CLA854400A1701	10
Dune	**8544 DN**	2CLA854400A6201	10
Taupé	**8544 TP**	2CLA854400A6301	10
Comodoro	**8544 CM**	2CLA854400A1901	10
Stainless Steel	**8544 AI**	2CLA854400A1401	10
Antique Gold	**8544 OE**	2CLA854400A1201	10
White Glass	**8544 CB**	2CLA854400A2101	5
Black Glass	**8544 CN**	2CLA854400A2501	5

Electronic blind control 1-gang

Rated voltage: 110 - 250 Vac ; 50 / 60 Hz.
Rated current: 700VA@230Vac / 350VA@127Vac.
Direct control.
Functions:
- PERS: standard blinds control. Optionally other 8144 inserts can be connected to the 8130.3 to control the blind from other locations.
- LAM: venetian type blinds control. Optionally other 8144 inserts can be connected to the 8130.3 to control the blind from other locations.
- Centralization (CEN): one 8130.3 can control all the 8130.3 of a line centrally.
Included: fixing claws.
Electronic rocker code: 8530.

Colour	Type	Order code	Pack/Qty.
	8130.3	2CLA813030A1001	1

Electronic rocker for blind control

Electronic rocker for blind control code: 8130.3.

Colour	Type	Order code	Pack/Qty.
Soft White	**8530 BL**	2CLA853000A1101	1
White w/o chrome	**8530 BB**	2CLA853000A4101	1
Silver	**8530 PL**	2CLA853000A1301	1
Soft Black	**8530 NS**	2CLA853000A1501	1
Dune	**8530 DN**	2CLA853000A6201	5
Taupé	**8530 TP**	2CLA853000A6301	5
Comodoro	**8530 CM**	2CLA853000A1901	5
Stainless Steel	**8530 AI**	2CLA853000A1401	1
Antique Gold	**8530 OE**	2CLA853000A1201	1

Sky Niessen

Pullcord switches

Pullcord switch 1-gang, 1-way, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 A.
Screwless terminals.
Included: fixing claws.
Cord length: 2 meters.
Cover plate code: 8507.

Colour	Type	Order code	Pack/Qty.
	8148	2CLA814800A1001	5

Cover for pull cord switch

Cover plate for pullcord switch code: 8148.

Colour	Type	Order code	Pack/Qty.
Soft White	**8507 BL**	2CLA850700A1101	10
White essence	**8507 BE**	2CLA850700A5101	10
Silver	**8507 PL**	2CLA850700A1301	10
Soft Black	**8507 NS**	2CLA850700A1501	10
Black essence	**8507 NE**	2CLA850700A1701	10
Dune	**8507 DN**	2CLA850700A6201	5
Taupé	**8507 TP**	2CLA850700A6301	5
Comodoro	**8507 CM**	2CLA850700A1901	5
Stainless Steel	**8507 AI**	2CLA850700A1401	10
Antique Gold	**8507 OE**	2CLA850700A1201	10

Schuko socket outlets

Schuko socket outlet



Rated voltage: 250 Vac.
Rated current: 16 A.
Type F: 2P + E.
Shuttered for child safety.
Screw terminals.
Without fixing claws code: 8188.
With fixing claws code: 8188.5.
Cover plate code: 8588.

Colour	Type	Order code	Pack/Qty.
	8188	2CLA818800A1001	10
	8188.5	2CLA818850A1001	10

Schuko socket outlet screwless connection



Rated voltage: 250 Vac.
Rated current: 16 A.
Type F: 2P + E.
Shuttered for child safety.
Screwless terminals.
Without fixing claws.
Cover plate code: 8588.

Colour	Type	Order code	Pack/Qty.
	8188.6	2CLA818860A1001	10

Cover plate for Schuko socket outlet

Cover plate for Schuko socket outlet code: 8188, 8188.5 & 8188.6.

Colour	Type	Order code	Pack/Qty.
Soft White	**8588 BL**	2CLA858800A1101	20
White essence	**8588 BE**	2CLA858800A5101	20
Silver	**8588 PL**	2CLA858800A1301	20
Soft Black	**8588 NS**	2CLA858800A1501	20
Black essence	**8588 NE**	2CLA858800A1701	20
Dune	**8588 DN**	2CLA858800A6201	20
Taupé	**8588 TP**	2CLA858800A6301	20
Comodoro	**8588 CM**	2CLA858800A1901	20
Stainless Steel	**8588 AI**	2CLA858800A1401	20
Antique Gold	**8588 OE**	2CLA858800A1201	20
White Glass	**8588 CB**	2CLA858800A2101	10
Black Glass	**8588 CN**	2CLA858800A2501	10

Sky Niessen

Schuko socket outlets

Cover plate for Schuko socket outlet

Suitable to identify special circuits.
Cover plate for Schuko socket outlet code:
8188, 8188.5 & 8188.6.

Colour	Type	Order code	Pack/Qty.
Red	**8588 RJ**	2CLA858800A7001	5
Green	**8588 VD**	2CLA858800A8001	5
Orange	**8588 NA**	2CLA858800A9001	5

Cover plate for Schuko socket outlet w/ lid

Cover plate for Schuko socket outlet code:
8188, 8188.5 & 8188.6.

Colour	Type	Order code	Pack/Qty.
Soft White	**8588.1 BL**	2CLA858810A1101	10
White w/o chrome	**8588.1 BB**	2CLA858810A4101	10
Silver	**8588.1 PL**	2CLA858810A1301	10
Soft Black	**8588.1 NS**	2CLA858810A1501	10
Dune	**8588.1 DN**	2CLA858810A6201	10
Taupé	**8588.1 TP**	2CLA858810A6301	10
Comodoro	**8588.1 CM**	2CLA858810A1901	10
Stainless Steel	**8588.1 AI**	2CLA858810A1401	5
Antique Gold	**8588.1 OE**	2CLA858810A1201	5

Schuko socket outlet with indicator lamp



Rated voltage: 250 Vac.
Rated current: 16 A.
Type F: 2P + E.
Shuttered for child safety.
Screw terminals.
Without fixing claws.
Included: indicator LED lamp.
Cover plate code: 8588.8

Colour	Type	Order code	Pack/Qty.
	8188.8	2CLA818880A1001	5

Cover plate for Schuko socket outlet w/ lens

Cover plate for Schuko socket outlet code: 8188.8.

Colour	Type	Order code	Pack/Qty.
Soft White	**8588.8 BL**	2CLA858880A1101	10
White w/o chrome	**8588.8 BB**	2CLA858880A4101	10
Silver	**8588.8 PL**	2CLA858880A1301	10
Soft Black	**8588.8 NS**	2CLA858880A1501	10
Dune	**8588.8 DN**	2CLA858880A6201	10
Taupé	**8588.8 TP**	2CLA858880A6301	10
Comodoro	**8588.8 CM**	2CLA858880A1901	10
Stainless Steel	**8588.8 AI**	2CLA858880A1401	10
Antique Gold	**8588.8 OE**	2CLA858880A1201	10

Sky Niessen

Schuko socket outlets

Schuko socket outlet for plain covers



Rated voltage: 250 Vac.
Rated current: 16 A.
Type F: 2P + E.
Shuttered for child safety.
Screw terminals.
Without fixing claws.
Cover plate code: 8588.9.

Colour	Type	Order code	Pack/Qty.
	8188.9	2CLA818890A1001	10

Flat cover plate for Schuko socket outlet

Cover plate for Schuko socket outlet code: 8188.9.

Colour	Type	Order code	Pack/Qty.
Soft White	**8588.9 BL**	2CLA858890A1101	20
White essence	**8588.9 BE**	2CLA858890A5101	20
Silver	**8588.9 PL**	2CLA858890A1301	20
Soft Black	**8588.9 NS**	2CLA858890A1501	20
Black essence	**8588.9 NE**	2CLA858890A1701	20
Dune	**8588.9 DN**	2CLA858890A6201	20
Taupé	**8588.9 TP**	2CLA858890A6301	20
Comodoro	**8588.9 CM**	2CLA858890A1901	20
Stainless Steel	**8588.9 AI**	2CLA858890A1401	20
Antique Gold	**8588.9 OE**	2CLA858890A1201	20
White Glass	**8588.9 CB**	2CLA858890A2101	10
Black Glass	**8588.9 CN**	2CLA858890A2501	10

Schuko socket outlet + USB charger 2x 200 mA, 2 outlets

Schuko soclet outlet:
Rated voltage: 250 Vac
Rated current: 16A
Type F: 2P + E
Shuttered for child safety
USB charger type A:
Output voltage: 5 Vdc ±5%. Output current: 2.000 mA.
Power consumption in stand-by: <= 0,015 W
Energy efficiency: >= 79%.
Operating temperature: 0ºC to 45ºC*
Overheat protection
LED indicator
Screw terminals
Without fixing claws
Cover plate code: 8588.3 XX

Colour	Type	Order code	Pack/Qty.
	8188.3	2CLA818830A1001	1

Cover plate for Schuko socket outlet + USB charger

Cover plate for Schuko socket outlet + USB charger 2x 200 mA, 2 outlets code: 8188.3

Colour	Type	Order code	Pack/Qty.
Soft White	**8588.3 BL**	2CLA818830A1101	1
White essence	**8588.3 BE**	2CLA818830A5101	1
Silver	**8588.3 PL**	2CLA818830A1301	1
Soft Black	**8588.3 NS**	2CLA818830A1501	1
Black essence	**8588.3 NE**	2CLA818830A1701	1
Dune	**8588.3 DN**	2CLA858830A6201	1
Taupé	**8588.3 TP**	2CLA858830A6301	1
Comodoro	**8588.3 CM**	2CLA858830A1901	1
Stainless Steel	**8588.3 AI**	2CLA818830A1401	1
Antique Gold	**8588.3 OE**	2CLA818830A1201	1

Sky Niessen

French / earth-pin socket outlets

French/Earth-pin socket outlet

Rated voltage: 250 Vac.
Rated current: 16 A.
Type E: 2P + E.
Shuttered for child safety.
Screw terminals.
Included: fixing claws.
Cover plate code: 8587.

Colour	Type	Order code	Pack/Qty.
	8187	2CLA818700A1001	10

Cover plate for French socket outlet

Cover plate for Schuko socket outlet code: 8187.

Colour	Type	Order code	Pack/Qty.
Soft White	**8587 BL**	2CLA858700A1101	20
White essence	**8587 BE**	2CLA858700A5101	20
Silver	**8587 PL**	2CLA858700A1301	20
Soft Black	**8587 NS**	2CLA858700A1501	20
Black essence	**8587 NE**	2CLA858700A1701	20
Dune	**8587 DN**	2CLA858700A6201	20
Taupé	**8587 TP**	2CLA858700A6301	20
Comodoro	**8587 CM**	2CLA858700A1901	20
Stainless Steel	**8587 AI**	2CLA858700A1401	20
Antique Gold	**8587 OE**	2CLA858700A1201	20

French/Earth-pin socket outlet for plain covers



Rated voltage: 250 Vac.
Rated current: 16 A.
Type E: 2P + E.
Shuttered for child safety.
Screwless terminals.
Included: fixing claws.
Cover plate code: 8587.9.

Colour	Type	Order code	Pack/Qty.
	8187.9	2CLA818790A1001	10

Flat cover plate for French socket outlet

Cover plate for French / earth-pin socket outlet code: 8187.9.

Colour	Type	Order code	Pack/Qty.
Soft White	**8587.9 BL**	2CLA858790A1101	10
White essence	**8587.9 BE**	2CLA858790A5101	10
Silver	**8587.9 PL**	2CLA858790A1301	10
Soft Black	**8587.9 NS**	2CLA858790A1501	10
Black essence	**8587.9 NE**	2CLA858790A1701	10
Dune	**8587.9 DN**	2CLA858790A6201	20
Taupé	**8587.9 TP**	2CLA858790A6301	20
Comodoro	**8587.9 CM**	2CLA858790A1901	20
Stainless Steel	**8587.9 AI**	2CLA858790A1401	10
Antique Gold	**8587.9 OE**	2CLA858790A1201	10
White Glass	**8587.9 CB**	2CLA858790A2101	10
Black Glass	**8587.9 CN**	2CLA858790A2501	10

Sky Niessen

Push-buttons

Universal socket outlet

Rated voltage: 125 / 250 Vac.
Rated current: 15 / 16 A.
Multiple type: 2P + E.
Shuttered for child safety.
Screw terminals.
Without fixing claws.
Cover plates:
- Euroamerican type (Type B+C: 2P + E / NEMA 5-15R): 8538.
- Universal type (Multiple type: 2P + E): 8539.

Colour	Type	Order code	Pack/Qty.
	8139	2CLA813900A1001	10

Cover plate for Euroamerican socket outlet

Cover plate with Euroamerican type figure for universal socket outlet code: 8139.

Colour	Type	Order code	Pack/Qty.
Soft White	**8538 BL**	2CLA853800A1101	10
Silver	**8538 PL**	2CLA853800A1301	10
Soft Black	**8538 NS**	2CLA853800A1501	10
Dune	**8538 DN**	2CLA858800A6201	20
Taupé	**8538 TP**	2CLA858800A6301	20
Comodoro	**8538 CM**	2CLA858800A1901	20
Stainless Steel	**8538 AI**	2CLA853800A1401	10
Antique Gold	**8538 OE**	2CLA853800A1201	10

Cover plate for Universal socket outlet

Cover plate with universal type figure for universal socket outlet code: 8139.

Colour	Type	Order code	Pack/Qty.
Soft White	**8539 BL**	2CLA853900A1101	10
Silver	**8539 PL**	2CLA853900A1301	10
Soft Black	**8539 NS**	2CLA853900A1501	10
Dune	**8539 DN**	2CLA853900A6201	10
Taupé	**8539 TP**	2CLA853900A6301	10
Comodoro	**8539 CM**	2CLA853900A1901	10
Stainless Steel	**8539 AI**	2CLA853900A1401	10
Antique Gold	**8539 OE**	2CLA853900A1201	10

USB chargers

USB charger A+C 18W, 2 outlets

Input voltage: 100 - 240 Vac ±10% ; 50 / 60 Hz.
Input current: 0,20 A (with maximum load).
Output voltage: 5 Vdc ±5%.
Output power: 18W.
Operating temperature: 0 ºC to 45 ºC.
Without fixing claws.
Cover plate code: 8585.

Colour	Type	Order code	Pack/Qty.
	8185.1	2CLA818510A1001	1

Cover plate for USB chargers

Cover plate for USB chargers 8185 & 8185.1

Colour	Type	Order code	Pack/Qty.
Soft White	**8585 BL**	2CLA858500A1101	5
White essence	**8585 BE**	2CLA858500A5101	5
Silver	**8585 PL**	2CLA858500A1301	5
Soft Black	**8585 NS**	2CLA858500A1501	5
Black essence	**8585 NE**	2CLA858500A1701	5
Dune	**8585 DN**	2CLA858500A6201	5
Taupé	**8585 TP**	2CLA858500A6301	5
Comodoro	**8585 CM**	2CLA858500A1901	5
Stainless Steel	**8585 AI**	2CLA858500A1401	5
White Glass	**8585 CB**	2CLA858500A2101	1
Black Glass	**8585 CN**	2CLA858500A2501	1

Sky Niessen
Protection devices

Circuit breaker 6A & RCD 10mA

Rated voltage: 120 - 230 Vac ; 50 / 60 Hz.
Rated current: 6 A.
Braking capacity: 1.500 A.
Residual current (sensitivity - IΔn): 10 mA.
C type magneto-thermic protection.
A type residual current protection.
Two-pole (1P + N) with 1 protected pole.
Without fixing claws.
Cover plate code: 8534.

Colour	Type	Order code	Pack/Qty.
	8134.1	2CLA813410A1001	1

Circuit breaker 10A & RCD 10mA

Rated voltage: 120 - 230 Vac ; 50 / 60 Hz.
Rated current: 10 A.
Braking capacity: 3.000 A.
Residual current (sensitivity - IΔn): 10 mA.
C type magneto-thermic protection.
A type residual current protection.
Two-pole (1P + N) with 1 protected pole.
Without fixing claws.
Cover plate code: 8534.

Colour	Type	Order code	Pack/Qty.
	8134.2	2CLA813420A1001	1

Circuit breaker 16A & RCD 10mA

Rated voltage: 120 - 230 Vac ; 50 / 60 Hz.
Rated current: 16 A.
Braking capacity: 3.000 A.
Residual current (sensitivity - IΔn): 10 mA.
C type magneto-thermic protection.
A type residual current protection.
Two-pole (1P + N) with 1 protected pole.
Without fixing claws.
Cover plate code: 8534.

Colour	Type	Order code	Pack/Qty.
	8134.3	2CLA813430A1001	1

Cover plate for circuit breaker & RCD

Cover plate for circuit breaker & RCD code: 8134.1, 8134.2 & 8134.3.

Colour	Type	Order code	Pack/Qty.
Soft White	**8534 BL**	2CLA853400A1101	1
Silver	**8534 PL**	2CLA853400A1301	1
Soft Black	**8534 NS**	2CLA853400A1501	1
Dune	**8534 DN**	2CLA853400A6201	1
Taupé	**8534 TP**	2CLA853400A6301	1
Comodoro	**8534 CM**	2CLA853400A1901	1
Stainless Steel	**8534 AI**	2CLA853400A1401	1
Antique Gold	**8534 OE**	2CLA853400A1201	1

Sky Niessen
TV outlets

TV / R terminal outlet

TV and R double outlet - Final.
Without filter.
Installation as a terminal outlet connected to a tap-off or splitter (without terminal resistor).
Connection: screw terminal and clamp.
Output connectors (C1 / C2):
IEC male 9,52mm diam. / IEC female 9,52 mm. diam.
Frequency range (I/O / C1 / C2):
5 - 862 MHz / 5 - 862 MHz / 5 - 862 MHz.
Basic loss (FM / DAB / VHF / UHF):
10,0±0,7 dB / 10,0 ±1,5 dB / 4,0±1,5 dB / 3,0±0,5 dB.
Isolation (FM / TV): >14 / >14.
Return loss (FM / TV): >18 / >10.
Included: fixing claws.
Cover plate code: 8550.

Colour	Type	Order code	Pack/Qty.
	8150	2CLA815000A1001	10

TV / R final outlet - CATV outlet

TV and R double outlet - CATV outlet - Final.
With filter.
Installation as a terminal outlet connected to a tap-off or splitter (without terminal resistor).
Connection: screw terminal and clamp.
Output connectors (C1 / C2):
IEC male 9,52 mm. diam. / IEC female 9,52 mm. diam.
Frequency range (C1 / C2):
5 - 68 & 118 - 1.000 MHz / 87,5 - 108 MHz.
Basic loss (R / FM / TV):
0,3±0,1 dB / 1,1 ±0,3 dB / 0,9±0,3 dB.
Isolation (FM / TV): >18 / >16.
Selectivity (FM / TV): >10 / >18.
Return loss (R / FM / TV): >18 / >16 / >18.
Chroma-luminance delay (ns): <10.
Included: fixing claws.
Cover plate code: 8550.

Colour	Type	Order code	Pack/Qty.
	8150.3	2CLA815030A1001	10

TV / R loop-through outlet

TV and R double outlet - Intermediate.
Installation as an intermediate outlet in series connected to each other. From 2nd to 4th floor.
Connection: screw terminal and clamp.
Output connectors (C1 / C2):
IEC male 9,52mm diam. / IEC female 9,52 mm. diam.
Frequency range (I/O / C1 / C2):
13 - 862 MHz / 13 - 862 MHz / 13 - 862 MHz.
Basic loss (FM / DAB / VHF / UHF):
25±1,5 dB / 25 ±1,5 dB / 8,0±0,7 dB / 8,0±0,7 dB.
Through loss (FM / VHF / UHF):
2,0±0,3 dB / 2,0±0,5 dB / 2,0±0,5 dB.
Directivity (FM / TV): >12 dB / >9 dB.
Isolation (FM / TV): >16 / >15.
Return loss (FM / TV): >12 / >12.
Included: fixing claws.
Cover plate code: 8550.

Colour	Type	Order code	Pack/Qty.
	8150.7	2CLA815070A1001	10

Cover plate for TV/R outlet

Cover plate for TV outlet code: 8150, 8150.3 & 8150.7.

Colour	Type	Order code	Pack/Qty.
Soft White	**8550 BL**	2CLA855000A1101	20
White essence	**8550 BE**	2CLA855000A5101	20
Silver	**8550 PL**	2CLA855000A1301	20
Soft Black	**8550 NS**	2CLA855000A1501	20
Black essence	**8550 NE**	2CLA855000A1701	20
Dune	**8550 DN**	2CLA855000A6201	20
Taupé	**8550 TP**	2CLA855000A6301	20
Comodoro	**8550 CM**	2CLA855000A1901	20
Stainless Steel	**8550 AI**	2CLA855000A1401	20
Antique Gold	**8550 OE**	2CLA855000A1201	20
White Glass	**8550 CB**	2CLA855000A2101	5
Black Glass	**8550 CN**	2CLA855000A2501	5

Sky Niessen
TV outlets

TV-R/SAT terminal outlet

TV-R and SAT double outlet - Final.
Installation as a terminal outlet connected to a tap-off or splitter (without terminal resistor).
Connection: screw terminal and clamp.
Output connectors (C1 / C2):
IEC male 9,52 mm. diam. / IEC female 9,52 mm. diam.
Frequency range (I/O / C1 / C2):
5 - 2.400 MHz / 5 - 862 MHz / 930 - 2.400 MHz.
Basic loss (FM / TV / SAT):
0,2±0,1 dB / 1,0 ±0,5 dB / 1,2±0,6 dB.
Isolation (FM / TV / SAT): >45 / >14 / >14.
Selectivity (TV-R / SAT): >15 / >15.
Return loss (VR / FM / TV / SAT): >25 / >25 / >14 / >10.
DC path (Vdc / mA / Tono):
24 max. / 500 max. / 22 KHz - DiSEqC.
Included: fixing claws.
Cover plate code: 8550.1.

Colour	Type	Order code	Pack/Qty.
	8151.3	2CLA815130A1001	10

TV-R/SAT final outlet

TV-R and SAT double outlet - Final.
Installation as a terminal outlet connected to a series with loop-through outlets.
Connection: screw terminal and clamp.
Output connectors (C1 / C2):
IEC male 9,52 mm. diam. / IEC female 9,52 mm. diam.
Frequency range (I/O / C1 / C2):
5 - 2.400 MHz / 5 - 2.400 MHz / 5 - 2.400 MHz.
Basic loss (FM / TV / SAT):
3,7±0,3 dB / 4,0±0,5 dB / 5,0±1,2 dB.
Isolation (FM / TV / SAT): >20 / >20 / >14.
Return loss (VR / FM / TV / SAT): >16 / >16 / >16 / >9.
DC path (Vdc / mA / Tono):
24 max. / 500 max. / 22 KHz - DiSEqC.
Included: fixing claws.
Cover plate code: 8550.1.

Colour	Type	Order code	Pack/Qty.
	8151.7	2CLA815170A1001	10

TV-R/SAT loop-through outlet

TV-R and SAT double outlet - Intermediate
Installation as an intermediate outlet in series connected to each other.
Output connectors (C1 / C2):
IEC male 9,52 mm. diam. / IEC female 9,52 mm. diam.
Frequency range (I/O / C1 / C2):
5 - 2.400 MHz / 5 - 2.400 MHz / 5 - 2.400 MHz.
Basic loss (FM / TV / SAT):
10,0±1,0 dB / 10,0±1,0 dB / 12,0±2,0 dB.
Through loss (FM / TV / SAT): 2,5±0,5 / 2,5±0,7 / 3,0±1,0.
Directivity (FM / TV / SAT): >20 / >12 / >5.
Isolation (FM / TV / SAT): >45 / >30 / >28.
Return loss (VR / FM / TV / SAT): >13 / >13 / >12 / >12.
DC path (Vdc / mA / Tono):
24 max. / 500 max. / 22 KHz - DiSEqC.
Included: fixing claws.
Cover plate code: 8550.1.

Colour	Type	Order code	Pack/Qty.
	8151.8	2CLA815180A1001	10

Cover plate for TV-R/SAT outlet

Cover plate for TV outlet code: 8151.3 , 8150.7 & 8150.8.

Colour	Type	Order code	Pack/Qty.
Soft White	**8550.1 BL**	2CLA855010A1101	20
White essence	**8550.1 BE**	2CLA855010A5101	20
Silver	**8550.1 PL**	2CLA855010A1301	20
Soft Black	**8550.1 NS**	2CLA855010A1501	20
Black essence	**8550.1 NE**	2CLA855010A1701	20
Dune	**8550.1 DN**	2CLA855000A6201	20
Taupé	**8550.1 TP**	2CLA855000A6301	20
Comodoro	**8550.1 CM**	2CLA855000A1901	20
Stainless Steel	**8550.1 AI**	2CLA855010A1401	20
Antique Gold	**8550.1 OE**	2CLA855010A1201	20
White Glass	**8550.1 CB**	2CLA855000A2101	5
Black Glass	**8550.1 CN**	2CLA855000A2501	5

Sky Niessen

Telephone & data outlets

Telephone outlet RJ12

RJ12 type connector.
6 contacts.
Suitable for 2 (6P2C), 4 (6P4C) or 6 (6P6C) RJ11 and RJ12 jacks.
Screw terminals.
Without fixing claws.
Cover plate code: 8517.

Colour	Type	Order code	Pack/Qty.
	8117	2CLA811700A1001	10

Data outlet RJ45 Cat.5e UTP

RJ45 type connector.
Cat.5e UTP.
In compliance with ANSI/TIA/EIA 568B.2, ISO/IEC11801 & EN50173.
Universal TIA/EIA 568A and 568B labeling.
Housing: ABS UL-94-0.
Durability: 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4)
IDC: PC UL94V-0, Accept 22-26AWG solid wire.
Contact: RJ45 8P8C, 3~50 micro-inch gold plating over nickel plated on contact area.
Tool-less wiring.
Without fixing claws.
Cover plate code: 8517.

Colour	Type	Order code	Pack/Qty.
	8118	2CLA811800A1001	10

Cover plate for telephone/data outlets

Cover plate for telephone/data outlet code: 8117 & 8118.

Colour	Type	Order code	Pack/Qty.
Soft White	**8517 BL**	2CLA851700A1101	10
White essence	**8517 BE**	2CLA851700A5101	10
Silver	**8517 PL**	2CLA851700A1301	10
Soft Black	**8517 NS**	2CLA851700A1501	10
Black essence	**8517 NE**	2CLA851700A1701	10
Dune	**8517 DN**	2CLA851700A6201	10
Taupé	**8517 TP**	2CLA851700A6301	10
Comodoro	**8517 CM**	2CLA851700A1901	10
Stainless Steel	**8517 AI**	2CLA851700A1401	10
Antique Gold	**8517 OE**	2CLA851700A1201	10
White Glass	**8517 CB**	2CLA851700A2101	5
Black Glass	**8517 CN**	2CLA851700A2501	5

Cover plate for data outlet 2-gang at 45º

Cover plate at 45º for two data connector housing (refs.: 2016, 2016.1, 2016.2 and 2016.3).
With labeling area for stickers.
With shutters.

Colour	Type	Order code	Pack/Qty.
Soft White	**8516.8 BL**	2CLA851680A1101	5
Silver	**8516.8 PL**	2CLA851680A1301	5
Soft Black	**8516.8 NS**	2CLA851680A1501	5
Dune	**8516.8 DN**	2CLA851680A6201	5
Taupé	**8516.8 TP**	2CLA851680A6301	5
Comodoro	**8516.8 CM**	2CLA851680A1901	5
Stainless Steel	**8516.8 AI**	2CLA851680A1401	5
Antique Gold	**8516.8 OEL**	2CLA851680A1201	5

Housing for data outlets – Keystone, 3M & AMP type

Housing for connectors with Keystone, 3M and AMP type clipping system.
Cover plate code: 8516.8.

Colour	Type	Order code	Pack/Qty.
	2016	2CLA201600A1001	10

Housing for data outlets – Systimax type

Housing for connectors with Systimax type clipping system.
Cover plate code: 8516.8.

Colour	Type	Order code	Pack/Qty.
	2016.1	2CLA201610A1001	10

Housing for data outlets – Paduit type

Housing for connectors with Panduit type clipping system.
Cover plate code: 8516.8.

Colour	Type	Order code	Pack/Qty.
	2016.2	2CLA201620A1001	10

Housing for data outlets – R&M type.

Housing for connectors with Keystone, R&M type clipping system.
Cover plate code: 8516.8.

Colour	Type	Order code	Pack/Qty.
	2016.3	2CLA201630A1001	10

Sky Niessen

Telephone & data outlets

Telephone outlet RJ12

RJ12 type connector. 6 contacts.
Suitable for 2 (6P2C), 4 (6P4C) or 6 (6P6C) RJ11 and RJ12 jacks.
Screw terminals.
Mounting grid delivered with the cover plate.
Cover plate code: 8518.1 & 8518.2.

Colour	Type	Order code	Pack/Qty.
	2017.2	2CLA201720A1001	10

Telephone outlet RJ45 Cat.3

RJ45 type connector. Cat.3.
8 contacts.
Suitable for 8 (8P8C) RJ45 jacks.
Tool-less wiring.
Mounting grid delivered with the cover plate.
Cover plate code: 8518.1 & 8518.2.

Colour	Type	Order code	Pack/Qty.
	2017.3	2CLA201730A1001	10

Data outlet RJ45 Cat.5e UTP

RJ45 type connector. Cat.5e UTP.
In compliance with ANSI/TIA/EIA 568B.2, ISO/IEC11801 & EN50173. Universal TIA/EIA 568A and 568B labeling. Housing: ABS UL-94-0.
Durability: 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4).
IDC: PC UL94V-0, Accept 22-26AWG solid wire.
Contact: RJ45 8P8C, 3~50 micro-inch gold plating over nickel plated on contact area. Tool-less wiring.
Mounting grid delivered with the cover plate.
Cover plate code: 8518.1 & 8518.2.

Colour	Type	Order code	Pack/Qty.
	2018.5	2CLA201850A1001	10

Data outlet RJ45 Cat.6 UTP

RJ45 type connector. Cat.6 UTP.
In compliance with ANSI/TIA/EIA 568B.2, ISO/IEC11801 & EN50173. Universal TIA/EIA 568A and 568B labeling. Housing: ABS UL-94-0.
Durability: 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4).
IDC: PC UL94V-0, Accept 22-26AWG solid wire.
Contact: RJ45 8P8C, 3~50 micro-inch gold plating over nickel plated on contact area. Tool-less wiring.
Mounting grid delivered with the cover plate.
Cover plate code: 8518.1 & 8518.2.

Colour	Type	Order code	Pack/Qty.
	2018.6	2CLA201860A1001	10

Data outlet RJ45 Cat.6A STP

RJ45 type connector. Cat.6A STP.
In compliance with ANSI/TIA/EIA 568B.2 , ISO/IEC11801 & EN50173. Universal TIA/EIA 568A and 568B Labeling. 10 Gb/sec. Durability: 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4). Housing: Zinc Die-casting design for optimal EMI protection. Slim size is ideal for interfaces where the spaces are tight. IDC: PC UL94V-0, Accept 22-26AWG solid wire. Contact: RJ45 8P8C, 3~50 micro-inch gold plating over nickel plated on contact area.
Tool-less wiring. Mounting grid delivered with the cover plate. Cover plate code: 8518.1 & 8518.2.

Colour	Type	Order code	Pack/Qty.
	2018.7	2CLA201870A1001	10

Housing for data outlets - Keystone type

Housing for connectors with Keystone type clipping system.
Mounting grid delivered with the cover plate.
Cover plate code: 8518.1 & 8518.2.

Colour	Type	Order code	Pack/Qty.
	2018	2CLA201800A1001	10

Housing for data outlets - Systimax type

Housing for connectors with Systimax type clipping system.
Mounting grid delivered with the cover plate.
Cover plate code: 8518.1 & 8518.2.

Colour	Type	Order code	Pack/Qty.
	2018.8	2CLA201880A1001	10

Cover plate for data outlet 1-gang

Cover plate for data outlets code:
2017.2, 2017.3, 2018, 2018.5, 2018.6 & 2018.8.
Included:
- Mounting grid without claws.
- Shutters.
- Labeling area.

Colour	Type	Order code	Pack/Qty.
Soft White	**8518.1 BL**	2CLA851810A1101	10
White essence	**8518.1 BE**	2CLA851810A5101	10
Silver	**8518.1 PL**	2CLA851810A1301	10
Soft Black	**8518.1 NS**	2CLA851810A1501	10
Black essence	**8518.1 NE**	2CLA851810A1701	10
Dune	**8518.1 DN**	2CLA851810A6201	10
Taupé	**8518.1 TP**	2CLA851810A6301	10
Comodoro	**8518.1 CM**	2CLA851810A1901	10
Stainless Steel	**8518.1 AI**	2CLA851810A1401	10
Antique Gold	**8518.1 OE**	2CLA851810A1201	10

Cover plate for data outlet 2-gangs

Cover plate for data outlets code:
2017.2, 2017.3, 2018, 2018.5, 2018.6 & 2018.8.
Included:
- Mounting grid without claws.
- Shutters.
- Labeling area.

Colour	Type	Order code	Pack/Qty.
Soft White	**8518.2 BL**	2CLA851820A1101	10
White essence	**8518.2 BE**	2CLA851820A5101	10
Silver	**8518.2 PL**	2CLA851820A1301	10
Soft Black	**8518.2 NS**	2CLA851820A1501	10
Black essence	**8518.2 NE**	2CLA851820A1701	10
Dune	**8518.2 DN**	2CLA851820A6201	10
Taupé	**8518.2 TP**	2CLA851820A6301	10
Comodoro	**8518.2 CM**	2CLA851820A1901	10
Stainless Steel	**8518.2 AI**	2CLA851820A1401	10
Antique Gold	**8518.2 OE**	2CLA851820A1201	10

Sky Niessen
VDI connectors

Mini-Jack connection unit

Front: 1x Mini-Jack connector (3,5mm stereo audio jack).
Rear: screw terminals (3/4 wires).
Without fixing claws.
Cover plate code: 8555.

Colour	Type	Order code	Pack/Qty.
	8155.4	2CLA815540A1001	1

HDMI connection unit

Front: 1x HDMI connector (Type A connector).
Rear: screwless terminals (20 wires).
Without fixing claws.
Cover plate code: 8555.

Colour	Type	Order code	Pack/Qty.
	8155.6	2CLA815560A1001	1

HDMI female-female connection unit

Front: 1x HDMI connector (Type A connector).
Rear: 1x HDMI connector (Type A connector) fitted at 90° angle.
Without fixing claws.
Cover plate code: 8555.

Colour	Type	Order code	Pack/Qty.
	8155.7	2CLA815570A1001	1

USB connection unit

Front: 1x USB 2.0 connector (Type A connector).
Rear: screw terminals (5 wires).
Without fixing claws.
Cover plate code: 8555.

Colour	Type	Order code	Pack/Qty.
	8155.8	2CLA815580A1001	1

USB female-female connection unit

Front: 1x USB 2.0 connector (Type A connector).
Rear: 1x USB 2.0 connector (Type A connector) fitted at 90° angle.
Without fixing claws.
Cover plate code: 8555.

Colour	Type	Order code	Pack/Qty.
	8155.9	2CLA815590A1001	1

Cover plate 1-gang VDI connection unit

Cover plate for 1-gang VDI connection unit code: 8155.4, 8155.6, 8155.7, 8155.8 & 8155.9.

Colour	Type	Order code	Pack/Qty.
Soft White	**8555 BL**	2CLA855500A1101	1
White essence	**8555 BE**	2CLA855500A5101	1
Silver	**8555 PL**	2CLA855500A1301	1
Soft Black	**8555 NS**	2CLA855500A1501	1
Black essence	**8555 NE**	2CLA855500A1701	1
Dune	**8555 DN**	2CLA855500A6201	1
Taupé	**8555 TP**	2CLA855500A6301	1
Comodoro	**8555 CM**	2CLA855500A1901	1
Stainless Steel	**8555 AI**	2CLA855500A1401	1
Antique Gold	**8555 OE**	2CLA855500A1201	1
White Glass	**8555 CB**	2CLA855500A2101	1
Black Glass	**8555 CN**	2CLA855500A2501	1

HDMI wired + USB connection unit



Front: 1x HDMI connector (Type A connector) & 1x USB 2.0 connector (Type A connector).
Rear: HDMI screwless terminals (20 wires) & USB screw terminals (5 wires).
Without fixing claws.
Cover plate code: 8555.1.

Colour	Type	Order code	Pack/Qty.
	8155.68	2CLA815568A1001	1

HDMI female-female + USB connection unit

Front: 1x HDMI connector (Type A connector) & 1x USB 2.0 connector (Type A connector).
Rear: 1x HDMI connector (Type A connector) fitted at 90º angle & USB screw terminals (5 wires).
Without fixing claws.
Cover plate code: 8555.1.

Colour	Type	Order code	Pack/Qty.
	8155.78	2CLA815578A1001	1

Double USB connection unit



Front: 2x USB 2.0 connector (Type A connector).
Rear: 2x USB screw terminals (5 wires).
Without fixing claws.
Cover plate code: 8555.1.

Colour	Type	Order code	Pack/Qty.
	8155.88	2CLA815588A1001	1

Sky Niessen
VDI connectors

Cover plate 2-gangs VDI connection unit

Cover plate for 2-gangs VDI connection unit code: 8155.68, 8155.78 & 8155.88.

Colour	Type	Order code	Pack/Qty.
Soft White	**8555.1 BL**	2CLA855510A1101	1
White essence	**8555.1 BE**	2CLA855510A5101	1
Silver	**8555.1 PL**	2CLA855510A1301	1
Soft Black	**8555.1 NS**	2CLA855510A1501	1
Black essence	**8555.1 NE**	2CLA855510A1701	1
Dune	**8555.1 DN**	2CLA855500A6201	1
Taupé	**8555.1 TP**	2CLA855500A6301	1
Comodoro	**8555.1 CM**	2CLA855500A1901	1
Stainless Steel	**8555.1 AI**	2CLA855510A1401	1
Antique Gold	**8555.1 OE**	2CLA855510A1201	1
White Glass	**8555.1 CB**	2CLA855500A2101	1
Black Glass	**8555.1 CN**	2CLA855500A2501	1

2x RCA connection unit

Front: 2x RCA connectors (Red / White).
Rear: screw terminals (4 wires).
Without fixing claws.
Cover plate code: 8555.2.

Colour	Type	Order code	Pack/Qty.
	8155.2	2CLA815520A1001	1

Cover plate 2RCA connection unit

Cover plate for 2RCA connection unit code: 8155.2.

Colour	Type	Order code	Pack/Qty.
Soft White	**8555.2 BL**	2CLA855520A1101	1
White essence	**8555.2 BE**	2CLA855520A5101	1
Silver	**8555.2 PL**	2CLA855520A1301	1
Soft Black	**8555.2 NS**	2CLA855520A1501	1
Black essence	**8555.2 NE**	2CLA855520A1701	1
Dune	**8555.2 DN**	2CLA855520A6201	1
Taupé	**8555.2 TP**	2CLA855520A6301	1
Comodoro	**8555.2 CM**	2CLA855520A1901	1
Stainless Steel	**8555.2 AI**	2CLA855520A1401	1
Antique Gold	**8555.2 OE**	2CLA855520A1201	1
White Glass	**8555.2 CB**	2CLA855520A2101	1
Black Glass	**8555.2 CN**	2CLA855520A2501	1

3x RCA connection unit

Front: 3x RCA connectors (Red / White / Yellow).
Rear: screw terminals (6 wires).
Without fixing claws.
Cover plate code: 8555.3.

Colour	Type	Order code	Pack/Qty.
	8155.3	2CLA815530A1001	1

Cover plate 3RCA connection unit

Cover plate for 3RCA connection unit code: 8155.3.

Colour	Type	Order code	Pack/Qty.
Soft White	**8555.3 BL**	2CLA855530A1101	1
Silver	**8555.3 PL**	2CLA855530A1301	1
Soft Black	**8555.3 NS**	2CLA855530A1501	1
Dune	**8555.3 DN**	2CLA855530A6201	1
Taupé	**8555.3 TP**	2CLA855530A6301	1
Comodoro	**8555.3 CM**	2CLA855530A1901	1
Stainless Steel	**8555.3 AI**	2CLA855530A1401	1
Antique Gold	**8555.3 OE**	2CLA855530A1201	1
White Glass	**8555.3 CB**	2CLA855530A2101	1
Black Glass	**8555.3 CN**	2CLA855530A2501	1

VGA connection unit

Front: 1x VGA connector (DE-15 connector).
Rear: screw terminals (15 wires).
Without fixing claws.
Cover plate code: 8555.5.

Colour	Type	Order code	Pack/Qty.
	8155.5	2CLA815550A1001	1

Cover plate VGA connection unit

Cover plate for VGA connection unit code: 8155.5.

Colour	Type	Order code	Pack/Qty.
Soft White	**8555.5 BL**	2CLA855550A1101	1
Silver	**8555.5 PL**	2CLA855550A1301	1
Soft Black	**8555.5 NS**	2CLA855550A1501	1
Dune	**8555.5 DN**	2CLA855550A6201	1
Taupé	**8555.5 TP**	2CLA855550A6301	1
Comodoro	**8555.5 CM**	2CLA855550A1901	1
Stainless Steel	**8555.5 AI**	2CLA855550A1401	1
Antique Gold	**8555.5 OE**	2CLA855550A1201	1
White Glass	**8555.5 CB**	2CLA855550A2101	1
Black Glass	**8555.5 CN**	2CLA855550A2501	1

Sky Niessen

Light controls - Rotatory dimmers

LED dimmer

LED dimmer With rotary control.
Two-way switch and soft-catch.
With N-terminal.
2- or 3-wire connection (neutral conductor not required).
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Very low installation depth: < 20 mm Without claws.
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection. With electronic overload protection.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz.
Nominal power (L): 2 - 100 W/VA (leading-edge control).
Nominal power (R, C): 10 - 360 W/VA (trailing-edge control).
Nominal power (LEDi): 2 - 100 W/VA (leading-edge control).
Nominal power (LEDi): 2 - 200 W/VA (trailing-edge control).

Colour	Type	Order code	Pack/Qty.
	8160.7	2CKA006512A0354	1

Rotatory dimmer, 1-10Vdc

Rated voltage: 230 V~ ; ± 10% - 50/60 Hz.
Rated power: 700 W / VA.
With rotatory control.
For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control drivers.
Without cover plate.
Not illuminable.
Making-current limiters have to be provided in case of too high making currents.
Included: fixing claws.
Cover plate code: 8560.2.

Colour	Type	Order code	Pack/Qty.
	8160.9	2CLA816090A1001	1

Cover plate with rotatory knob for dimmer

Cover plate with rotatory knob for dimmer code: 8160, 8160.7 & 8160.9.
Included: indicator neon lamp.

Colour	Type	Order code	Pack/Qty.
Soft White	**8560.2 BL**	2CLA856020A1101	5
White essence	**8560.2 BE**	2CLA856020A5101	5
Silver	**8560.2 PL**	2CLA856020A1301	5
Black essence	**8560.2 NE**	2CLA856020A1701	5
Dune	**8560.2 DN**	2CLA856020A6201	5
Taupé	**8560.2 TP**	2CLA856020A6301	5
Comodoro	**8560.2 CM**	2CLA856020A1901	5
Soft Black	**8560.2 NS**	2CLA856020A1501	5
Stainless Steel	**8560.2 AI**	2CLA856020A1401	5
Antique Gold	**8560.2 OE**	2CLA856020A1201	5

Sky Niessen

Light controls - DALI controlers

Rotary DALI dimmer Flush-mounted, tunable white.

For DALI broadcast service (via central telegram). For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. Fool proved. For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8). Colour temperature can then be set between 2,700 K - 6,500 K. Brightness power-on level and backround brightness level adjustable, buffered. With integrated LED illumination for orientation. Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Max. current consumption: 15 mA. Not suitable for combining with other DALI sensors or central units of other manufacturers. For the generation of the DALI voltage a power supply according to IEC 62386 is required. Max. DALI-cable length: 300 m (1,5 - 2,5 mm²). Without cover plate.

Colour	Type	Order code	Pack/Qty.
	8161.6	2CKA006599A3025	1

Rotary DALI dimmer Flush-mounted, DALI, with internal power supply, tunable White

For DALI broadcast service (via central telegram). With integrated DALI power adaptor. For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8). Colour temperature can then be set between 2,700 K - 6,500 K. With electronic short-circuit protection. With electronic overload protection. Brightness power-on level and backround brightness level adjustable, buffered. With integrated LED illumination for orientation. Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Up to 3 potentiometers are connectable in parallel in active mode. Not suitable for combining with other DALI sensors or central units of other manufacturers. DALI-voltage: 15,5 V= Rated current: max. 75 mA Power consumption: < 2,5 W Number of DALI-units: 37 in case of one active power-potentiometer in case of three active power-potentiometer in parallel connection: 111 Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices. Passive mode: the potentiometer is suitable as additional operation point. Max. DALI-cable length: 300 m (1,5 - 2,5 mm²). Without cover plate..3

Colour	Type	Order code	Pack/Qty.
	8161.7	2CKA006599A3026	1

Cover plate with rotatory knob for dimmer

Cover plate with rotatory knob for dimmer code: 8161.4 & 8161.5.

Colour	Type	Order code	Pack/Qty.
Soft White	**8560.2 BL**	2CLA856020A1101	5
White essence	**8560.2 BE**	2CLA856020A5101	5
Silver	**8560.2 PL**	2CLA856020A1301	5
Soft Black	**8560.2 NS**	2CLA856020A1501	5
Black essence	**8560.2 NE**	2CLA856020A1701	5
Dune	**8560.2 DN**	2CLA856020A6201	5
Taupé	**8560.2 TP**	2CLA856020A6301	5
Comodoro	**8560.2 CM**	2CLA856020A1901	5
Stainless Steel	**8560.2 AI**	2CLA856020A1401	5
Antique Gold	**8560.2 OE**	2CLA856020A1201	5

Sky Niessen

Light controls - Timer switches

Time delayed switch with triac

Rated voltage: 230 Vac - 50 Hz.
Power:
- Incandescent: 40 - 500 W.
- Halogen with transformer: 40 - 400 VA.
- Motors: 40 - 100 VA.

2 wire connection.
Delay setup: 10 sec. to 10 min.
Overcurrent protection: with fuse.
Indicator LED lamp included.
Without fixing claws.
Operating temperature: 0 - 40 ºC.
Cover plate code: 8562.

Colour	Type	Order code	Pack/Qty.
	8162.1	2CLA816210A1001	1

Cover plate for timer switch

Cover plate for timer switch code: 8162.1.

Colour	Type	Order code	Pack/Qty.
Soft White	**8562 BL**	2CLA856200A1101	1
Silver	**8562 PL**	2CLA856200A1301	1
Soft Black	**8562 NS**	2CLA856200A1501	1
Dune	**8562 DN**	2CLA856200A6201	1
Taupé	**8562 TP**	2CLA856200A6301	1
Comodoro	**8562 CM**	2CLA856200A1901	1
Stainless Steel	**8562 AI**	2CLA856200A1401	1
Antique Gold	**8562 OE**	2CLA856200A1201	1

Light controls - Motion sensors

180° motion sensor

For automatic switching of devices dependent on motion and brightness.
For relay inserts 8161.
With integrated selector switch for ON-AUTOMATIC-OFF (lockable).
Surveillance density: 18 sectors with 72 switching segments.
Switch-off delay: 10 sec to 30 min or short-time pulse 1 sec adjustable.
Temperature range device: 0 °C to 35 °C.
Detection range: frontal: 12 m, lateral: 8 m.
Brightness limit value: from 5 lux up to daytime operation.
Detection angle: 180 °.
Mounting height: 0.8 m - 1.2 m.

Colour	Type	Order code	Pack/Qty.
Soft White	**8541.1 BL**	2CLA854110A1101	1
Silver	**8541.1 PL**	2CLA854110A1301	1
Soft Black	**8541.1 NS**	2CLA854110A1501	1
Dune	**8541.1 DN**	2CLA854110A6201	1
Taupé	**8541.1 TP**	2CLA854110A6301	1
Comodoro	**8541.1 CM**	2CLA854110A1901	1
Stainless Steel	**8541.1 AI**	2CLA854110A1401	1
Antique Gold	**8541.1 OE**	2CLA854110A1201	1

Sky Niessen

Light controls - Programmable switches

Relay switch

Rated voltage: 230 V~ ; ± 10% - 50/60 Hz.
3 wire connection (neutral conductor required).
For timer control element 8165.31. Operation also possible via conventional push buttons 8104.X.
Outputs: 1 Normally open contact, potential-bound.
Suitable for: 230 V incandescent lamps, 230 V halogen lamps, fluorescent lamps and low-voltage halogen lamps, that are operated via transformers.
Rated current: 10 AX. Rated power: 2300 W / VA.
Temperature range device: -25 °C to 55 °C.
Included: fixing claws.

Colour	Type	Order code	Pack/Qty.
	8161	2CLA816100A1001	1

Relay switch for blinds

Rated voltage: 230 V~ ; ± 10% - 50 Hz.
Suitable for blind, roller blind and awning drives with mechanical or electronic limit switch shut-off.
Two 230 V multi-way input terminals (Up/Down) for group control. Operating mode switch for the following modes: normal, louvre, base station, position.
Wind alarm, cleaning functions can be accommodated via extension input. For comfort timer control element 8165.31. Remote control with blind controls code: 8144.X.
Running time: 3 min.
Outputs: 2 Normally open contact.
Rated current: 3 A, cos φ0.5. Rated power: 690 VA.
Control/Signal outputs: 2.
Temperature range device: 0 °C to 35 °C.
Included: fixing claws.

Colour	Type	Order code	Pack/Qty.
	8161.2	2CLA816120A1001	1

Timer control element

For manual and time-controlled switching of blinds, roller blinds, awnings, lighting and other electrical devices.
With dusk to dawn program including (Astro-program).
Individual Astro adjustment and Astro blocking time.
The controlled devices can be manually operated at any time.
Simple setting via high-resolution display with background illumination. With preset switching times/date/time.
Factory-set switching times can be individually adjusted.
Automatic switchover from summer time to winter time (switch-off function). Switching times/programme are safely stored in the event of a mains power failure. Power reserve for time and date > 10 years. Simple toggling between manual/automatic/vacation modes.
Freely adjustable temperature and brightness-dependent sun protection function. Freely adjustable twilight function.
User-adjustable running times for blinds and air conditioning.
Programming possible only with control element attached and energized. 6 switching times per day can be user-defined for each day of the week. Astro switching times and switching times can be combined.
For universal relay switch insert 8161.
For blind control insert 8161.2.
Temperature range device: 0 °C to 35 °C.
Cover plate code: 8565.3.

Colour	Type	Order code	Pack/Qty.
	8165.31	2CLA816530A1101	1

Cover plate for timer control element

Cover plate for timer control element code: 8165.31.

Colour	Type	Order code	Pack/Qty.
Soft White	**8565.3 BL**	2CLA856530A1101	1
White w/o chrome	**8565.3 BB**	2CLA856530A4101	1
Silver	**8565.3 PL**	2CLA856530A1301	1
Soft Black	**8565.3 NS**	2CLA856530A1501	1
Dune	**8565.3 DN**	2CLA856530A6201	1
Taupé	**8565.3 TP**	2CLA856530A6301	1
Comodoro	**8565.3 CM**	2CLA856530A1901	1
Stainless Steel	**8565.3 AI**	2CLA856530A1401	1
Antique Gold	**8565.3 OE**	2CLA856530A1201	1

Sky Niessen

Light controls - Wireless control

Wireless switch transmitter - 1 channel

1-gang wall-mounted transmitter independent of mains power supply. 1 radio channel for switching, dimming, controlling blinds or 2 light scenes can be called up. For wireless actuators: 8130.4, 8130.5, 8130.7 & 8130.6. MHz. Free-field range: approx. 100 m. Power supply: lithium button cell battery type CR2032.
Battery service life: typically 5 years, therefore practically maintenance-free. Rated voltage: 3 Vdc. Automatic monitoring of battery life. Including fixing plate for mounting on smooth walls or on switch boxes. Control element: switch contacts top/bottom. Display elements: LED to indicate the transmission. Temperature range device: -5 °C to 45 °C. Battery included in delivery.

Colour	Type	Order code	Pack/Qty.
Soft White	**8531.1 BL**	2CLA853110A1101	1
White w/o chrome	**8531.1 BB**	2CLA853110A4101	1
Silver	**8531.1 PL**	2CLA853110A1301	1
Soft Black	**8531.1 NS**	2CLA853110A1501	1
Dune	**8531.1 DN**	2CLA853110A6201	1
Taupé	**8531.1 TP**	2CLA853110A6301	1
Comodoro	**8531.1 CM**	2CLA853110A1901	1

Wireless switch transmitter - 2 channel

2-gang wall-mounted transmitter independent of mains power supply. 2 radio channel for switching, dimming, controlling blinds or 4 light scenes can be called up. For wireless actuators: 8130.4, 8130.5, 8130.7 & 8130.6. Send frequency: 868 MHz. Free-field range: approx. 100 m.
Power supply: lithium button cell battery type CR2032.
Battery service life: typically 5 years, therefore practically maintenance-free.
Rated voltage: 3 Vdc.
Automatic monitoring of battery life.
Including fixing plate for mounting on smooth walls or on switch boxes.
Control element: switch contacts top/bottom.
Display elements: LED to indicate the transmission.
Temperature range device: -5 °C to 45 °C.
Battery included in delivery.

Colour	Type	Order code	Pack/Qty.
Soft White	**8531.2 BL**	2CLA853120A1101	1
White w/o chrome	**8531.2 BB**	2CLA853120A4101	1
Silver	**8531.2 PL**	2CLA853120A1301	1
Soft Black	**8531.2 NS**	2CLA853120A1501	1
Dune	**8531.2 DN**	2CLA853120A6201	1
Taupé	**8531.2 TP**	2CLA853120A6301	1
Comodoro	**8531.2 CM**	2CLA853120A1901	1

Wireless switch actuator

Rated voltage: 230 Vac ; ± 10% - 50/60 Hz.
For wireless switching of electrical loads.
2 functions: ON/OFF switch or time delayed switch.
For wall mounted transmitter code: 8531.1 &8531.2.
Switch-off delay: 3 sec. / 1 min. / 5 min. / 15 min.
Repeater function can be activated for extended range.
For universal attachment or installation.
3 wire connection (neutral conductor required).
With auxiliary input for push-buttons code: 8104.X.
Send/receive frequency: 868 MHz. Free-field range: approx. 100 m. Control element: adjustable potentiometer. Display elements: status indication of output via LED. Outputs: 1x Normally Open or Normally Closed contact, 230 Vac.
Rated power:
- Incandescent, halogen, electronic transformer and ferromagnetic transformers: 2.300 W / VA.
- Fluorescent load: 1.000 VA.
Temperature range (device): -5 °C to 45 °C.
Dimensions: (L x W x D): 47 mm. x 48 mm. x 22 mm.

Colour	Type	Order code	Pack/Qty.
	8130.4	2CLA813040A1001	1

Wireless dimming actuator

Rated voltage: 230 Vac ; ± 10% - 50/60 Hz
For wireless switching and dimming of electrical loads.
For functions ON/OFF switch and dimming.
For wall mounted transmitter code: 8531.1 & 8531.2.
Repeater function can be activated for extended range.
For universal attachment or installation.
2-wire connection (neutral conductor not required)
3-wire connection system (neutral conductor is required) is preferred when using electronic transformers, electromagnetic transformers and energy saving lamps.
With auxiliary input for push-buttons code: 8104.X.
Send/receive frequency: 868 MHz.
Free-field range: approx. 100 m.
Control element: adjustable potentiometer
Display elements: status indication of output via LED.
Outputs: 1 dimming channel, 230Vac
Rated power:
- Incandescent lamps: 35 - 300 W
- Low voltage halogen lamps, which are operated by electronic transformers: 35 - 200 VA
- Low voltage halogen lamps with conventional transformers: 35 - 175 VA
Temperature range device: -5 °C to 45 °C
Dimensions: (L x W x D): 47 mm x 48 mm x 33 mm

Colour	Type	Order code	Pack/Qty.
	8130.5	2CLA813050A1001	1

Sky Niessen

Light controls - Wireless control

Wireless blind actuator

Rated voltage: 230 Vac ; ±10 % - 50/60 Hz.
For wireless switching of electrical loads or controlling blinds/shutters.
2 functions: 2-gang switch or blind control.
Operation also possible via conventional blind controls code 8144.X or push-buttons 8104.X.
For wall mounted transmitter code: 8531.1 & 8531.2.
With blind switch function: 3 minutes run time.
Repeater function can be activated for extended range.
For universal attachment or installation.
3 wire connection (neutral conductor required).
Send/receive frequency: 868 MHz.
Free-field range: approx. 100 m.
Control element: adjustable potentiometer.
Display elements: status indication of output via LED.
Inputs: 2.
Polling voltage: 230 V~, Sensing pulse, L-wire.
Outputs: 2 Normally Open contact, 230 Vac.
Rated power:
- Blind motors: 3 A, cos φ0.5.
- Incandescent/halogen lamps: 3 A.
- Fluorescent lamps: 3 AX.

Temperature range device: -5 °C to 45 °C.
Dimensions: (L x W x D): 47 mm. x 48 mm. x 22 mm.

Colour	Type	Order code	Pack/Qty.
	8130.7	2CLA813070A1001	1

Wireless DIN-rail actuator

Rated voltage: 230 Vac ; ±10 % - 50/60 Hz.
For wireless switching of electrical loads.
2 functions: ON/OFF switch or time delayed switch.
For wall mounted transmitter code: 8531.1 &8531.2.
Switch-off delay:
3 sec. / 1 min. / 5 min. / 10 min. / 30 min.
Repeater function can be activated for extended range.
For DIN-rail installation.
3 wire connection (neutral conductor required).
Send/receive frequency: 868 MHz.
Free-field range: approx. 30 m.
Control element: adjustable potentiometer.
Display elements: status indication of output via LED.
Outputs: 1x Normally Open or Normally Closed contact, 230 Vac.
Rated power:
- Incandescent, halogen, electronic transformer and ferromagnetic transformers: 2.300 W / VA.
- Fluorescent load: 1.000 VA.

Temperature range device: -5 °C to 45 °C.
Dimensions: 1 module.

Colour	Type	Order code	Pack/Qty.
	8130.6	2CLA813060A1001	1

Light controls - Rotatory switch

4 position rotatory switch

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
4 postions.
4 circuits.
Faston terminals.
Without fixing claws.
Cover plate code: 8554.

Colour	Type	Order code	Pack/Qty.
	8154	2CLA815400A1001	10

Cover plate with knob for rotatory switch

Cover plate for rotatory switch code: 8154.

Colour	Type	Order code	Pack/Qty.
Soft White	**8554 BL**	2CLA855400A1101	1
White w/o chrome	**8554 BB**	2CLA855400A4101	1
Silver	**8554 PL**	2CLA855400A1301	1
Soft Black	**8554 NS**	2CLA855400A1501	1
Dune	**8554 DN**	2CLA855400A6201	1
Taupé	**8554 TP**	2CLA855400A6301	1
Comodoro	**8554 CM**	2CLA855400A1901	1
Stainless Steel	**8554 AI**	2CLA855400A1401	1
Antique Gold	**8554 OE**	2CLA855400A1201	1

Sky Niessen

Temperature controls - RTC

Rotatory room thermostat with floor sensor

Rated voltage: 230 Vac ; ±10 % - 50/60 Hz.
Load power: 2.300 W. Load type: floor heating resistor.
Control temperature: +5 ºC to +45 ºC (Set point).
OFF state: At OFF position, the thermostat is off, so that it does not address the temperature measured by the floor temperature probe. The relay output contact is open.
Temperature accuracy: 0,5 ºC. Hysteresis: 0,5 ºC.
Floor temperature sensor: NTC, 10KΩ at 25ºC, -40ºC to 80ºC. Double isolated cable, 4m length.
LED light indication: Red and green.
Ambient temperature: -20 ºC to 45 ºC.
Without fixing claws. Cover plate code: 8540.9.

Colour	Type	Order code	Pack/Qty.
	8140.9	2CLA814090A1001	1

Cover plate with rotatory knob for RTC

Cover plate for room thermostat code: 8140.9.

Colour	Type	Order code	Pack/Qty.
Soft White	**8540.9 BL**	2CLA854090A1101	5
Silver	**8540.9 PL**	2CLA854090A1301	5
Soft Black	**8540.9 NS**	2CLA854090A1501	5
Dune	**8540.9 DN**	2CLA853110A6201	1
Taupé	**8540.9 TP**	2CLA853110A6301	1
Comodoro	**8540.9 CM**	2CLA853110A1901	1
Stainless Steel	**8540.9 AI**	2CLA854090A1401	5
Antique Gold	**8540.9 OE**	2CLA854090A1201	5

Signaling and lighting systems

DND/MUR 2-gang switch



Rated voltage: 250 Vac
Rated current: 10A.
Installation inside the room.
Gang 1: Do Not Disturb (DND) red symbol and indicator LED lamp (rocker).
Gang 2: Make Up Room (MUR) green symbol and indicator LED lamp (rocker).
To be combined with rocker reference 8544.4.

Colour	Type	Order code	Pack/Qty.
	8144.4	2CLA814440A1001	1

Bell push-button with DND/MUR LED indicator



Rated voltage: 250 Vac
RRated voltage: 250 Vac
Rated current: 10A
Installation outside the room.
Red Do Not Disturb (DND) and green Make Up Room (MUR) LED signaling included.
Push-button with bell symbol.
To be combined with cover 8580.4.

Colour	Type	Order code	Pack/Qty.
	8180.4	2CLA818040A1001	1

Cover plate for DND/MUR 2-gang switch 8144.4

Gang 1: Do Not Disturb (DND) red symbol and indicator LED lamp (rocker).
Gang 2: Make Up Room (MUR) green symbol and indicator LED lamp (rocker).

Colour	Type	Order code	Pack/Qty.
Soft White	**8544.4 BL**	2CLA854440A1101	5
White w/o chrome	**8544.4 BB**	2CLA854440A4101	5
Silver	**8544.4 PL**	2CLA854440A1301	5
Soft Black	**8544.4 NS**	2CLA854440A1501	5
Dune	**8544.4 DN**	2CLA854440A6201	5
Taupé	**8544.4 TP**	2CLA854440A6301	5
Comodoro	**8544.4 CM**	2CLA854440A1901	5
Stainless Steel	**8544.4 AI**	2CLA854440A1401	5
Antique Gold	**8544.4 OE**	2CLA854440A1201	5

Sky Niessen

Signaling and lighting systems

Cover plate for bell push-button with DND/MUR LED indicator 8180.4

Red LED Do Not Disturb (DND) on the left and green LED Make Up Room (MUR) on the right.
Bell symbol.

Colour	Type	Order code	Pack/Qty.
Soft White	**8580.4 BL**	2CLA858040A1101	5
White w/o chrome	**8580.4 BB**	2CLA858040A4101	5
Silver	**8580.4 PL**	2CLA858040A1301	5
Soft Black	**8580.4 NS**	2CLA858040A1501	5
Dune	**8580.4 DN**	2CLA858040A6201	5
Taupé	**8580.4 TP**	2CLA858040A6301	5
Comodoro	**8580.4 CM**	2CLA858040A1901	5
Stainless Steel	**8580.4 AI**	2CLA858040A1401	5
Antique Gold	**8580.4 OE**	2CLA858040A1201	5

LED signaling light

Rated voltage: 127-230 Vac / 50-60 Hz
Lamp: white LED
Luminous flux: > 2 lumen at 1 meter
White diffuser
Without fixing claws
Cover plate code: 8581 without pictogram or 8581.XX with pictogram.

Colour	Type	Order code	Pack/Qty.
	8180.1	2CLA818010A1001	1

LED DND/MUR signaling light

Rated voltage: 127-230 Vac / 50-60 Hz.
Lamp: red/green LED.
Luminous flux: > 2 lumen at 1 meter.
White diffuser.
Without fixing claws.
Cover plate code: 8581 without pictogram or 8581.XX with pictogram.

Colour	Type	Order code	Pack/Qty.
	8180.2	2CLA818020A1001	1

Beacon LED light

Rated voltage: 230 Vac / 50 Hz.
Lamp: white LED.
Luminous flux: > 2 lumen at 1 meter.
White diffuser.
Autonomy: 3 hours (1 hour at maximum illumination 2 hours with lower illumination).
Battery: Ni-MH (estimated lifetime: 4 years).
Without fixing claws.
Cover plate code: 8581 without pictogram or 8581.XX with pictogram.

Colour	Type	Order code	Pack/Qty.
	8181.2	2CLA818120A1001	1

Cover for signaling light white

Cover for signaling light with white diffuser for LED lights code: 8180.1, 8180.2 & 8181.2.

Colour	Type	Order code	Pack/Qty.
White	**8581 BL**	2CLA858100A1101	5

Cover for signaling light red

Cover for signaling light with red diffuser for LED lights code: 8180.1, 8180.2 & 8181.3.

Colour	Type	Order code	Pack/Qty.
Red	**8581 RJ**	2CLA858100A1301	5

Cover for signaling light green

Cover for signaling light with green diffuser for LED lights code: 8180.1, 8180.2 & 8181.4.

Colour	Type	Order code	Pack/Qty.
Green	**8581 VD**	2CLA858100A1401	5

Cover for signaling light “WC” symbol

Cover for signaling light with white diffuser and “WC” symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.10	2CLA858110A1001	5

Cover for signaling light “WC men” symbol

Cover for signaling light with white diffuser and “WC men” symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.11	2CLA858110A1101	5

Sky Niessen

Signaling and lighting systems

Cover for signaling light “WC women” symbol

Cover for signaling light with white diffuser and “WC woman” symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.12	2CLA858110A1201	5

Cover for signaling light “WC handic.” symbol

Cover for signaling light with white diffuser and “WC handic.” symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.13	2CLA858110A1301	5

Cover for signaling light “No smoking” symbol

Cover for signaling light with white diffuser and “No smoking” symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.14	2CLA858110A1401	5

Cover for signaling light “No phone” symbol

Cover for signaling light with white diffuser and “No phone” symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.15	2CLA858110A1501	5

Cover for signaling light “Silence” symbol

Cover for signaling light with white diffuser and “Silence”. symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.16	2CLA858110A1601	5

Cover for signaling light “Silence” symbol

Cover for signaling light with white diffuser and “Silence”. symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.17	2CLA858110A1701	5

Cover for signaling light “No entry” symbol

Cover for signaling light with white diffuser and “No entry”. symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.18	2CLA858110A1801	5

Cover for signaling light “Elevator” symbol

Cover for signaling light with white diffuser and “Elevator” symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.19	2CLA858110A1901	5

Cover for signaling light “Exit” symbol

Cover for signaling light with white diffuser and “Exit” symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.20	2CLA858120A1001	5

Cover for signaling light “Info point” symbol

Cover for signaling light with white diffuser and “Info point” symbol for LED lights code: 8180.1, 8180.2 & 8181.5.

Colour	Type	Order code	Pack/Qty.
	8581.21	2CLA858120A1101	5

Sky Niessen

Buzzer / Door bell

Buzzer



Rated voltage: 127 - 230 Vac / 50 - 60 Hz.
Rated power: 8 VA.
Adjustable tone.
Acoustic power at 1 meter with cover plate: 75 dB.
Without fixing claws.
Cover plate code: 8529.

Colour	Type	Order code	Pack/Qty.
	8119	2CLA811900A1001	10

Electronic door bell with 4 melodies

Rated voltage: 230 Vac / 50-60 Hz.
4 melodies available.
Acoustic power at 1 meter with cover plate: 72 dB.
Without fixing claws.
Cover plate code: 8529.

Colour	Type	Order code	Pack/Qty.
	8124.2	2CLA812420A1001	1

Cover plate for buzzer/door bell

Cover plate for buzzer / door bell code: 8119 & 8124.2.

Colour	Type	Order code	Pack/Qty.
Soft White	**8529 BL**	2CLA852900A1101	5
White essence	**8529 BE**	2CLA852900A5101	5
Silver	**8529 PL**	2CLA852900A1301	5
Soft Black	**8529 NS**	2CLA852900A1501	5
Black essence	**8529 NE**	2CLA852900A1701	5
Dune	**8529 DN**	2CLA852900A6201	5
Taupé	**8529 TP**	2CLA852900A6301	5
Comodoro	**8529 CM**	2CLA852900A1901	5
Stainless Steel	**8529 AI**	2CLA852900A1401	5
Antique Gold	**8529 OE**	2CLA852900A1201	5

Blank covers / Cable outlets

Blank cover plate



Included: mounting grid and cover plate.
Without fixing claws.

Colour	Type	Order code	Pack/Qty.
Soft White	**8500 BL**	2CLA850000A1101	10
White essence	**8500 BE**	2CLA850000A5101	10
Silver	**8500 PL**	2CLA850000A1301	10
Soft Black	**8500 NS**	2CLA850000A1501	10
Black essence	**8500 NE**	2CLA850000A1701	10
Dune	**8500 DN**	2CLA850000A6201	10
Taupé	**8500 TP**	2CLA850000A6301	10
Comodoro	**8500 CM**	2CLA850000A1901	10
Stainless Steel	**8500 AI**	2CLA850000A1401	10
Antique Gold	**8500 OE**	2CLA850000A1201	10
White Glass	**8500 CB**	2CLA850000A2101	5
Black Glass	**8500 CN**	2CLA850000A2501	5

Cable outlet

3 connection screw terminals up to 2,5 mm².
Cable tie included.
Included: fixing claws.
Cover plate code: 8507.

Colour	Type	Order code	Pack/Qty.
	8107	2CLA810700A1001	10

Cover plate for cable outlet

Cover plate for cable outlet code: 8107.

Colour	Type	Order code	Pack/Qty.
Soft White	**8507 BL**	2CLA850700A1101	10
White essence	**8507 BE**	2CLA850700A5101	10
Silver	**8507 PL**	2CLA850700A1301	10
Soft Black	**8507 NS**	2CLA850700A1501	10
Black essence	**8507 NE**	2CLA850700A1701	10
Dune	**8507 DN**	2CLA850700A6201	10
Taupé	**8507 TP**	2CLA850700A6301	10
Comodoro	**8507 CM**	2CLA850700A1901	10
Stainless Steel	**8507 AI**	2CLA850700A1401	10
Antique Gold	**8507 OE**	2CLA850700A1201	10

Sky Niessen

Multiroom Bluetooth system

Multiroom sound module

Rated voltage: 127-230 Vac ± 15%; 50-60 Hz.
Max. consumption: 200 mA.
Stand-by consuption: 0,3W.
Amplifier power: 6+6 W; <1% distorsion (4 Ω).
Speaker impedance: 4 Ω (2+2 W audio).
FM radio digital tuner with RDS.
Alarm clock with buzzer, radio types and snooze function.
Bluetooth receiver: Bluetooth® v2.1 2.4GHz IEEE 802.15.1.
Multiroom function available (1 master device and up to 14 slave devices).
Remote control using code 9368.2 (ZigBee 2.4GHz IEEE 802.15.4).
Optional: auxilary module 9368.3 for I/O (1 mini-jack stereo input & 1 mini-jack stereo output) and USB connection functions.

Colour	Type	Order code	Pack/Qty.
	9368.1	2CLA936810A1001	1

Remote control for multiroom sound module - 2M

Rated voltage: 127-230 Vac ± 15%; 50-60 Hz.
Max. consumption: 15 mA.
Stand-by consuption: 0,5W.
To control 9368.1 module (1 remote control for each module).
Wireless connection between moles 9368.1 and 9368.2 (ZigBee 2.4GHz IEEE 802.15.4).
Optional: auxilary module 9368.3 for I/O (1 mini-jack stereo input & 1 mini-jack stereo output) and USB connection functions. In case of using 9368.3 module, the connection between modules 9368.1 and 9368.2 must be wired (3 wires).
Mounting grid delivered with the cover plate (without fixing claws).
Cover plate code: 8568.

Colour	Type	Order code	Pack/Qty.
	9368.2	2CLA936820A1001	1

FM radio with alarm

FM-radio and alarm module - 2M

Rated voltage: 230 Vac ± 15%; 50-60 Hz.
Max. consumption: 100 mA.
Stand-by consuption: 0,2W.
Amplifier power: 2+2 W; <1% distorsion (16 Ω).
Speaker impedance: 16 Ω (2+2 W audio).
FM radio digital tuner with RDS.
Alarm clock with buzzer, radio types and snooze function.
Optional: auxilary module 9368.3 for I/O (1 mini-jack stereo input & 1 mini-jack stereo output), USB connection and Bluetooth receiver functions.
Mounting grid delivered with the cover plate (without fixing claws).
Cover plate code: 8568.

Colour	Type	Order code	Pack/Qty.
	9368	2CLA936800A1001	1

FM-radio and alarm module - 2M

Rated voltage: 127 Vac ± 15%; 50-60 Hz.
Max. consumption: 100 mA.
Stand-by consuption: 0,2W.
Amplifier power: 2+2 W; <1% distorsion (16 Ω).
Speaker impedance: 16 Ω (2+2 W audio).
FM radio digital tuner with RDS.
Alarm clock with buzzer, radio types and snooze function.
Optional: auxilary module 9368.3 for I/O (1 mini-jack stereo input & 1 mini-jack stereo output), USB connection and Bluetooth receiver functions.
Mounting grid delivered with the cover plate (without fixing claws).
Cover plate code: 8568.

Colour	Type	Order code	Pack/Qty.
	9368.7	2CLA936870A1001	1

Cover plate for radio/remote control modules

Cover plate for FM-radio module and for remote control module code: 9368, 9368.2 & 9368.7.
Included: cover plate and mounting grid.
Without fixing claws.

Colour	Type	Order code	Pack/Qty.
Soft White	**8568 BL**	2CLA856800A1101	1
White w/o chrome	**8568 BB**	2CLA856800A4101	1
Silver	**8568 PL**	2CLA856800A1301	1
Soft Black	**8568 NS**	2CLA856800A1501	1
Dune	**8568 DN**	2CLA856800A6201	1
Taupé	**8568 TP**	2CLA856800A6301	1
Comodoro	**8568 CM**	2CLA856800A1901	1
Stainless Steel	**8568 AI**	2CLA856800A1401	1
Antique Gold	**8568 OE**	2CLA856800A1201	1

Sky Niessen - Sound system

Auxiliary module

Auxiliary module - 2M

Power supply through 9368, 9368.2 or 9368.7 modules.
Max. consumption: 200 mA.
Stand-by consuption: 0,4W.
Bluetooth receiver: Bluetooth® v2.1 2.4GHz IEEE 802.15.1.
USB connector: for MP3 and WAV files. Max. consuption of the connected device: 100 mA @5Vdc.
Input: 1x mini-jack stereo 3,5 mm.
Output: 1x mini-jack stereo 3,5 mm.
Mounting grid delivered with the cover plate (without fixing claws).
Cover plate code: N2268.3.

Colour	Type	Order code	Pack/Qty.
	9368.3	2CLA936830A1001	1

Cover plate for I/O + USB + Bluetooth module

Cover plate for I/O + USB + Bluetooth module code: 9368.3.
Included: cover plate and mounting grid.
Without fixing claws.

Colour	Type	Order code	Pack/Qty.
Soft White	**8568.3 BL**	2CLA856830A1101	1
White w/o chrome	**8568.3 BB**	2CLA856830A4101	1
Silver	**8568.3 PL**	2CLA856830A1301	1
Soft Black	**8568.3 NS**	2CLA856830A1501	1
Dune	**8568.3 DN**	2CLA856830A6201	1
Taupé	**8568.3 TP**	2CLA856830A6301	1
Comodoro	**8568.3 CM**	2CLA856830A1901	1
Stainless Steel	**8568.3 AI**	2CLA856830A1401	1
Antique Gold	**8568.3 OE**	2CLA856830A1201	1

2" loudspeaker for wall

2" loudspeaker 2 W



Compatible with sound modules and amplifier code: 9368, 9368.1, 9368.7 and 9335.1.
With broadband characteristics.
With screwless terminals.
Rated output: 2 W (RMS).
Frequency response: 150 - 16.000 Hz.
Impedance: 16 Ohm.
Mounting depth: 34 mm.
Without fixing claws.
Cover plate code: 8529, 8629 & 9399.4.

Colour	Type	Order code	Pack/Qty.
	9329	2CLA932900A1001	1

Cover plate for 2" loudspeaker



Cover plate for 2" loudspeaker code: 9329.

Colour	Type	Order code	Pack/Qty.
Soft White	**8529 BL**	2CLA852900A1101	5
White essence	**8529 BE**	2CLA852900A5101	5
Silver	**8529 PL**	2CLA852900A1301	5
Soft Black	**8529 NS**	2CLA852900A1501	5
Black essence	**8529 NE**	2CLA852900A1701	5
Dune	**8529 DN**	2CLA852900A6201	5
Taupé	**8529 TP**	2CLA852900A6301	5
Comodoro	**8529 CM**	2CLA852900A1901	5
Stainless Steel	**8529 AI**	2CLA852900A1401	5
Antique Gold	**8529 OE**	2CLA852900A1201	5

Cover plate for 2" loudspeaker

Cover plate for 2" loudspeaker code: 9329.

Colour	Type	Order code	Pack/Qty.
Chrome	**8629 CR**	2CLA862900A1401	5
Black Glass	**8629 CN**	2CLA862900A1501	5

Embellishing grid for 2" loudspeaker

Embellishing grid for 2" loudspeaker code: 9329.
Plastic material.

Colour	Type	Order code	Pack/Qty.
White	**9399.4 BA**	2CLA939940A1001	5
Black	**9399.4 NG**	2CLA939940A1501	5

Sky Niessen - Sound system

5" loudspeaker for ceiling

5" loudspeaker 6 W

Compatible with sound modules and amplifier code: 9368, 9368.1, 9368.7 and 9335.1.
With broadband characteristics.
With screw terminals.
Rated output: 6 W (RMS).
Frequency response: 70 - 10.000 Hz.
Impedance: 16 Ohm.
Flush mounted installation with 9399 mounting box or 9399.1 mounting ring.
Embellishing grid code: 9399.2.

Colour	Type	Order code	Pack/Qty.
	9329.1	2CLA932910A1001	1

Installation box for 5" loudspeaker

For 9329.1 loudspeaker.
For flush-mounted assembly.
Drilling measurements: 174 mm.
Mounting depth: 84 mm.

Colour	Type	Order code	Pack/Qty.
	9399	2CLA939900A1001	12

Installation ring for 5" loudspeaker

For 9329.1 loudspeaker.
For mounting in hollow walls/ceilings.
With spring brackets.
Drilling measurements: 160 mm.
Mounting depth: 110 mm.

Colour	Type	Order code	Pack/Qty.
	9399.1	2CLA939910A1001	12

Embellishing grid for 5" loudspeaker

Embellishing grid for 5" loudspeaker code: 9329.1.
Plastic material.
With central fixation screw.

Colour	Type	Order code	Pack/Qty.
	9399.2	2CLA939920A1001	12

Auxiliary amplifier

Auxiliary 20W amplifier

Rated voltage: 230 Vac ± 10 % / 50-60 Hz.
Power consumption: 3,5 VA (max. 36 VA).
Output voltage: 15 V- (max. 1,5 A).
Output power:
- 10 + 10 W (2 Ω).
- 20 W (4 Ω).
Speaker impedance:
- 2 - 16 Ω (10 + 10 W).
- 4 - 16 Ω (20 W).
Can be operated in booster mode with FM radio modules 9368 and 9368.7 and multiroom modules 9368.1.
Can be operated in “”standalone”” mode with one audio input.
Can be used in bridge operation.
For extending the number of speakers at one amplifier insert.
For max. 16 speakers code 9329 or 9329.1.
DIN-rail installation. Module width: 7.

Colour	Type	Order code	Pack/Qty.
	9335.1	2CLA933510A1001	1

Sky Niessen - Sound system

Potentiometers

Potentiometer for loudspeakers 3W

Wire-wound potentiometer.
3 W / 27 Ω.
For low impedance circuits.
Without fixing claws.
Cover plate code: 8559.

Colour	Type	Order code	Pack/Qty.
	8159.3	2CLA815930A1001	1

Potentiometer for loudspeakers 5W

Wire-wound potentiometer.
5 W / 47 Ω.
For low impedance circuits.
Without fixing claws.
Cover plate code: 8559.

Colour	Type	Order code	Pack/Qty.
	8159.5	2CLA815950A1001	1

Cover plate with rotatory knob for potentiometer

Cover plate with rotatory knob for potentiometer: 8159.3 & 8159.5.

Colour	Type	Order code	Pack/Qty.
Soft White	**8559 BL**	2CLA855900A1101	1
White w/o chrome	**8559 BB**	2CLA855900A4101	1
Silver	**8559 PL**	2CLA855900A1301	1
Soft Black	**8559 NS**	2CLA855900A1501	1
Dune	**8559 DN**	2CLA855900A6201	1
Taupé	**8559 TP**	2CLA855900A6301	1
Comodoro	**8559 CM**	2CLA855900A1901	1
Stainless Steel	**8559 AI**	2CLA855900A1401	1
Antique Gold	**8559 OE**	2CLA855900A1201	1

Connection units

Speaker connection unit

Front: 2x spring speaker terminals (Red/Black).
Rear: 2x screw terminals.
Without fixing claws.
Cover plate code: 8557.1.

Colour	Type	Order code	Pack/Qty.
	8157.1	2CLA815710A1101	1

Cover plate for speaker connection unit

Cover plate for speaker connection unit code: 8157.1.

Colour	Type	Order code	Pack/Qty.
Soft White	**8557.1 BL**	2CLA855710A1101	1
Silver	**8557.1 PL**	2CLA855710A1301	1
Soft Black	**8557.1 NS**	2CLA855710A1501	1
Dune	**8557.1 DN**	2CLA855710A6201	1
Taupé	**8557.1 TP**	2CLA855710A6301	1
Comodoro	**8557.1 CM**	2CLA855710A1901	1
Stainless Steel	**8557.1 AI**	2CLA855710A1401	1
Antique Gold	**8557.1 OE**	2CLA855710A1201	1

Sky Niessen - Free@home - Home automation

Sensors

free@home Sensor unit - 1-gang

For sending switching, dimming and blind commands to an ABB-free@home® actuator.
Control element: Switch contacts top/ bottom.
Display elements: LED as light for orientation or display of switching state.
Mounting depth: 9 mm.
To be installed with SR-1-85, SRL-1-85, SRD-1-85, SRB-1-85 and SRS-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SU-F-1.0.1	2CKA006220A0117	1

free@home Sensor unit - 2-gang

For sending switching, dimming and blind commands to an ABB-free@home® actuator.
Control element: Switch contacts top/ bottom.
Display elements: LED as light for orientation or display of switching state.
Mounting depth: 9 mm.
To be installed with SR-2-85, SRL-2-L-85 SRL-2-R-85, SRD-2-L-85, SRD-2-R-85, SRB-2-85 SRS-2-L-85 and SRS-2-R-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SU-F-2.0.1	2CKA006220A0118	1

Sensor & switch actuators

free@home Sensor/Switch actuator - 1/1-gang

For switching 230 V~ devices. With 1 integrated switch actuator. Switching function is available pre-configured.
Outputs: 1× normally open contact, potential free.
Suitable for: resistive.
Rated current: 10 A.
Rated power: 2300 W.
Suitable for: capacitive.
Rated current: 10 AX.
Mounting depth: 32 mm.
To be installed with SR-1-85, SRL-1-85, SRD-1-85, SRB-1-85 and SRS-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SSA-F-1.1.1	2CKA006220A0123	1

free@home Sensor/Switch actuator - 2/1-gang

For switching 230 V~ devices. With 1 integrated switch actuator. Switching function is available pre-configured.
Outputs: 1× normally open contact, potential free.
Suitable for: resistive.
Rated current: 10 A.
Rated power: 2300 W.
Suitable for: capacitive.
Rated current: 10 AX.
Mounting depth: 32 mm.
To be installed with SR-2-85, SRL-2-L-85 SRL-2-R-85, SRD-2-L-85, SRD-2-R-85, SRB-2-85 SRS-2-L-85 and SRS-2-R-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SSA-F-2.1.1	2CKA006220A0124	1

free@home Sensor/Switch actuator - 2/2-gang

For switching 230 V~ devices. With 2 integrated switch actuator. Switching function is available pre-configured.
Outputs: 2× normally open contact, potential free.
Suitable for: resistive.
Rated current: 10 A.
Rated power: 2 x 1200 W.
Suitable for: capacitive.
Rated current: 10 AX.
Mounting depth: 32 mm.
To be installed with SR-2-85, SRL-2-L-85 SRL-2-R-85, SRD-2-L-85, SRD-2-R-85, SRB-2-85 SRS-2-L-85 and SRS-2-R-85 cover plates.
Mounting depth: 32 mm.
To be installed with SR-2-85, SRL-2-L-85 SRL-2-R-85, SRD-2-L-85, SRD-2-R-85, SRB-2-85 SRS-2-L-85 and SRS-2-R-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SSA-F-2.2.1	2CKA006220A0125	1

Sky Niessen - Free@home - Home automation

Sensor & dimmer actuators

free@home sensor/Dimmer actuator - 1/1-gang

For dimming 230 V~ loads. With integrated universal dimming actuator for controlling different lamps. The dimming function is available pre-configured.
Outputs: 1× dimming channel.
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformers.
Rated power: 10–180 W / VA.
Suitable for: LEDi and energy-saving bulbs.
Rated power: 2–80 W / VA.
Mounting depth: 32 mm.
To be installed with SR-1-85, SRL-1-85, SRD-1-85, SRB-1-85 and SRS-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SDA-F-1.1.1	2CKA006220A0126	1

free@home Sensor/Dimmer actuator - 2/1-gang

For dimming 230 V~ loads. With integrated universal dimming actuator for controlling different lamps. The dimming function is available pre-configured
Outputs: 1× dimming channel.
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformers.
Rated power: 10–180 W / VA.
Suitable for: LEDi and energy-saving bulbs.
Rated power: 2–80 W / VA.
Mounting depth: 32 mm.
To be installed with SR-2-85, SRL-2-L-85 SRL-2-R-85, SRD-2-L-85, SRD-2-R-85, SRB-2-85 SRS-2-L-85 and SRS-2-R-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SDA-F-2.1.1	2CKA006220A0127	1

Sensor & blind actuators

free@home Sensor/Blind actuator - 1/1-gang

For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured.
Outputs: 1× Change-over contacts/normally open contact, potential-bound.
Rated power: 920 VA.
Rated current: 4 A.
Suitable for: Operating mode blind.
Mounting depth: 32 mm.
To be installed with SR-1-85, SRL-1-85, SRD-1-85, SRB-1-85 and SRS-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SBA-F-1.1.1	2CKA006220A0128	1

free@home Sensor/Blind actuator - 2/1-gang

For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured.
Outputs: 1× Change-over contacts/normally open contact, potential-bound.
Rated power: 920 VA.
Rated current: 4 A.
Suitable for: Operating mode blind.
Mounting depth: 32 mm.
To be installed with SR-2-85, SRL-2-L-85 SRL-2-R-85, SRD-2-L-85, SRD-2-R-85, SRB-2-85 SRS-2-L-85 and SRS-2-R-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SBA-F-2.1.1	2CKA006220A0129	1

Sky Niessen - Free@home - Home automation

Room temperature controller

free@home Room temperature controller

Control element with room temperature control function for controlling commercially available actuating drives or analogue actuating drives (continuous controllers), as well as fan coils. With display of setvalue temperature.
Display elements: LCD Display showing operation modes.
Mounting depth: 14 mm.
To be installed with CP-RTC-85 cover plates for RTC or CP-RTC-FC-85 cover plates for fan coil control.

Colour	Type	Order code	Pack/Qty.
	RTC-F-1	2CKA006220A0122	1

Motion sensor & actuators

free@home 180° motion sensor

With select lens for detection with animal access. For automatic switching of ABB-free@home® actuators dependent on movement and brightness.
To be used with.
Detection range: frontal 6 m, lateral 3 m.
Detection angle: 180°.
Brightness limit value: 1 – 500 lux.
Protection class of device: IP 20.
Mounting depth: 14.1 mm.
To be installed with CP-MD-85 cover plates (mounting grid without claws included).

Colour	Type	Order code	Pack/Qty.
	MD-F-1.0.PB.1	2CKA006220A0229	1

free@home 180° motion sensor/actuator

With select lens for detection with animal access.
Including an integrated actuator for switching 230 V~ devices.
Outputs: 1× normally open contact, potential free.
Suitable for: resistive.
Rated current: 10 A.
Rated power: 2300 W.
Suitable for: capacitive.
Rated current: 10 AX.
Detection range: frontal 6 m, lateral 3 m.
Detection angle: 180°.
Brightness limit value: 1 – 500 lux.
Protection class of device: IP 20.
Mounting depth: 31.5 mm.
To be installed with CP-MD-85 cover plates (mounting grid without claws included).

Colour	Type	Order code	Pack/Qty.
	MSA-F.1.1.PB.1	2CKA006220A0231	1

Wireless sensors

free@home Sensor unit - 1-gang - Wireless

Rated voltage: 230 Vac - 50/60Hz.
For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator.
Wireless communication with the free@home system.
With fixing claws.
Control element: switch contacts top/bottom.
Display elements: LED as light for orientation or display of the switching state.
Temperature range device: -5 °C to 45 °C.
Mounting depth: 32 mm.
To be installed with SR-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SU-F-1.0.1-WL	2CKA006200A0072	1

free@home Sensor unit - 2-gang - Wireless

Rated voltage: 230 Vac - 50/60Hz.
For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator.
Wireless communication with the free@home system.
With fixing claws.
Control element: switch contacts top/bottom.
Display elements: LED as light for orientation or display of the switching state.
Temperature range device: -5 °C to 45 °C.
Mounting depth: 32 mm.
To be installed with SR-2-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SU-F-2.0.1-WL	2CKA006200A0073	1

free@home Sensor/Switch actuator - 1/1-gang - Wireless

Rated voltage: 230 Vac - 50/60Hz.
For switching 230 V~ consumers.
Wireless communication with the free@home system.
With integrated switch actuator. Switching function is available also without prior programming (pre-configured).
Configuration can be changed later via the web interface (groups, scenes, etc.).
3 wire connection (neutral conductor required).
With 230 V extension unit input (On/Off).
With fixing claws.
Control element: switch contacts top/bottom.
Display elements: LED as light for orientation or display of the switching state.
Outputs: 1 Normally Open contact, potential-bound (output voltage: 230 Vac)
Suitable for: ohmic.
Rated current / power: 10 A / 2300 W.
Suitable for: capacitive.
Rated current / power: 10 AX / 2300 VA.
Suitable for: inductive.
Rated current / power: 10 A / 2300 VA.
Temperature range device: -5 °C to 45 °C.
Mounting depth: 32 mm.
To be installed with SR-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SSA-F-1.1.1-WL	2CKA006200A0074	1

Sky Niessen - Free@home - Home automation

Wireless sensor & switch actuators

free@home Sensor/Switch actuator - 2/1-gang - Wireless

Rated voltage: 230 Vac - 50/60Hz.
For switching 230 V~ consumers.
Wireless communication with the free@home system.
With integrated switch actuator. Switching function is available also without prior programming (pre-configured).
Configuration can be changed later via the web interface (groups, scenes, etc.). The right sensor channel for programming additional functions (groups, scenes, etc.).
3 wire connection (neutral conductor required).
With 230 V extension unit input (On/Off).
With fixing claws.
Control element: switch contacts top/bottom.
Display elements: LED as light for orientation or display of the switching state.
Outputs: 1 Normally Open contact, potential-bound (output voltage: 230 Vac).
Suitable for: ohmic.
Rated current / power: 10 A / 2300 W.
Suitable for: capacitive.
Rated current / power: 10 AX / 2300 VA.
Suitable for: inductive.
Rated current / power: 10 A / 2300 VA.
Temperature range device: -5 °C to 45 °C.
Mounting depth: 32 mm.
To be installed with SR-2-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SSA-F-2.1.1-WL	2CKA006200A0075	1

free@home Sensor/Switch actuator - 2/2-gang - Wireless

Rated voltage: 230 Vac - 50/60Hz.
For switching 230 V~ consumers.
Wireless communication with the free@home system.
With integrated 2-gang switch actuator. Switching function is available also without prior programming (pre-configured).
Configuration can be changed later via the web interface (groups, scenes, etc.). The right sensor channel for programming additional functions (groups, scenes, etc.).
3 wire connection (neutral conductor required).
With two 230 V extension unit inputs (On/Off).
With fixing claws.
Control element: switch contacts top/bottom
Display elements: LED as light for orientation or display of the switching state.
Outputs: 2 Normally Open contacts, potential-bound (output voltage: 230 Vac).
Suitable for: ohmic.
Rated current / power: 5 A / 1200 W.
Suitable for: capacitive.
Rated power: 920 VA.
Suitable for: inductive.
Rated power: 800 VA.
Temperature range device: -5 °C to 45 °C.
Mounting depth: 32 mm.
To be installed with SR-2-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SSA-F-2.2.1-WL	2CKA006200A0076	1

Wireless sensor & dimmer actuators

free@home Sensor/Dimmer actuator - 1/1-gang - Wireless

Rated voltage: 230 Vac - 50/60Hz.
For dimming 230 V~ loads.
Wireless communication with the free@home system.
With integrated universal dimming actuator for controlling LEDs, incandescent lamps, 230 V halogen lamps, lowvoltage halogen lamps with conventional or electronic transformers, and dimmable energy-saving halogen lamps. For dimmable Retrofit-LEDs (LEDi).
Dimming function is available also without prior programming (pre-configured). Configuration can be changed later via the web interface (groups, scenes, etc.).
2-wire connection (neutral conductor not required)
3-wire connection technology is possible as an option for improved load behaviour (for details see the manual).
With 230 V extension unit input (dimming brighter/darker, switching).
With fixing claws.
Control element: switch contacts top/bottom.
Display elements: LED as light for orientation or display of the switching state.
Outputs: 1 dimming channel.
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformer.
Rated power: 20 - 180 W / VA.
Suitable for: LEDi and energy-saving bulbs; typical.
Rated power: 2 - 80 W / VA.
Temperature range device: -5 °C to 45 °C.
Mounting depth: 32 mm.
To be installed with SR-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SDA-F-1.1.1-WL	2CKA006200A0077	1

free@home Sensor/Dimmer actuator - 2/1-gang - Wireless

Rated voltage: 230 Vac - 50/60Hz.
For dimming 230 V~ loads.
Wireless communication with the free@home system.
With integrated universal dimming actuator for controlling LEDs, incandescent lamps, 230 V halogen lamps, lowvoltage halogen lamps with conventional or electronic transformers, and dimmable energy-saving halogen lamps. For dimmable Retrofit-LEDs (LEDi). Dimming function is available also without prior programming (left sensor channel is pre-configured). Configuration can be changed later via the web interface (groups, scenes, etc.). The right sensor channel for programming additional functions (groups, scenes, etc.).
2-wire connection (neutral conductor not required)
3-wire connection technology is possible as an option for improved load behaviour (for details see the manual).
With 230 V extension unit input (dimming brighter/darker, switching).
With fixing claws.
Control element: switch contacts top/bottom
Display elements: LED as light for orientation or display of the switching state.
Outputs: 1 dimming channel.
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformer.
Rated power: 20 - 180 W / VA.
Suitable for: LEDi and energy-saving bulbs; typical.
Rated power: 2 - 80 W / VA.
Temperature range device: -5 °C to 45 °C.
Mounting depth: 32 mm.
To be installed with SR-2-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SDA-F-2.1.1-WL	2CKA006200A0078	1

Sky Niessen - Free@home - Home automation

Wireless sensor & blind actuators

free@home Sensor/Blind actuator - 1/1-gang - Wireless

Rated voltage: 230 Vac - 50/60Hz.
For controlling blind or awning motors.
Wireless communication with the free@home system.
With integrated blind actuator. Blind function is available also without prior programming (pre-configured).
Configuration can be changed later via the web interface (groups, scenes, etc.).
3 wire connection (neutral conductor required).
With two 230 V extension unit inputs (Up/Down).
With fixing claws.
Control element: switch contacts top/bottom.
Display elements: LED as light for orientation or display of the switching state.
Outputs: 2 Normally Open contact, potential-bound (output voltage: 230 Vac).
Suitable for: blind motors.
Rated current / power: 4 A / 920 VA.
Temperature range device: -5 °C to 45 °C.
Mounting depth: 32 mm.
To be installed with SR-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SBA-F-1.1.1-WL	2CKA006200A0079	1

free@home Sensor/Blind actuator - 2/1-gang - Wireless

Rated voltage: 230 Vac - 50/60Hz.
For controlling blind or awning motors.
Wireless communication with the free@home system.
With integrated blind actuator. Blind function is available also without prior programming (pre-configured).
Configuration can be changed later via the web interface (groups, scenes, etc.). The right sensor channel for programming additional functions (groups, scenes, etc.).
3 wire connection (neutral conductor required).
With two 230 V extension unit inputs (Up/Down).
With fixing claws.
Control element: switch contacts top/bottom.
Display elements: LED as light for orientation or display of the switching state.
Outputs: 2 Normally Open contacts, potential-bound (output voltage: 230 Vac).
Suitable for: blind motors.
Rated current / power: 4 A / 920 VA.
Temperature range device: -5 °C to 45 °C.
Mounting depth: 32 mm.
To be installed with SR-2-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SBA-F-2.1.1-WL	2CKA006200A0080	1

Wireless temperature controller

free@home Room thermostat - Wireless

Rated voltage: 230 Vac - 50/60Hz.
Heating/cooling operation.
Wireless communication with the free@home system.
Control element with room temperature controller function. With display of set-value temperature. In connection with temperature sensor 6226/T the integrated room temperature controller can be fitted with a remote sensor.
With fixing claws.
Control element: floating rocker for the selection of set values and operating modes.
Display elements: LCD showing operation modes.
Temperature range device: -5 °C to 45 °C.
Mounting depth: 32 mm.
To be installed with CP-RTC-85 cover plates for RTC or CP-RTC-FC-85 for fan coil control.

Colour	Type	Order code	Pack/Qty.
	RTC-F-1-WL	2CKA006200A0081	1

free@home Room thermostat/actuator - Wireless

Rated voltage: 230 Vac - 50/60Hz.
Rated frequency: 50 Hz / 60 Hz.
Heating/cooling operation.
Wireless communication with the free@home system.
Control element with room temperature controller function. With display of set-value temperature. With integrated switch actuator, e.g. for controlling thermoelectric actuating drives in heating/cooling systems or electric floor heating systems. RTC function is available also without prior programming (pre-configured). In connection with temperature sensor 6226/T the integrated room temperature controller can be fitted with a remote sensor.
3 wire connection (neutral conductor required).
With fixing claws.
Control element: floating rocker for the selection of set values and operating modes.
Display elements: LCD showing operation modes.
Outputs: 1 Normally Open contact, potential-bound (output voltage: 230 Vac).
Suitable for: ohmic.
Rated current / power: 16 A / 3680 W.
Temperature range device: -5 °C to 45 °C.
Mounting depth: 32 mm.
To be installed with CP-RTC-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	RTC-F-2.1.1-WL	2CKA006200A0082	1

Sky Niessen - Free@home - Home automation

Cover plates

free@home Room thermostat - Wireless

Cover plate - free@home 1-gang sensors
Cover plate for free@home sensors and sensor/actuators with 1-gang sensors code: SU-F-1.0.1, SSA-F-1.1.1, SDA-F-1.1.1, SBA-F-1.1.1, SU-F-1.0.1-WL, SSA-F-1.1.1-WL, SDA-F-1.1.1-WL, SBA-F-1.1.1-WL.
Without symbol.

Colour	Type	Order code	Pack/Qty.
Soft White	**SR-1-85 BL**	2CLA852620A1101	1
Silver	**SR-1-85 PL**	2CLA852620A1301	1
Soft Black	**SR-1-85 NS**	2CLA852620A1501	1
Dune	**SR-1-85-DN**	2CLA852620A6201	1
Taupé	**SR-1-85-TP**	2CLA852620A6301	1
Comodoro	**SR-1-85-CM**	2CLA852620A1901	1
Stainless Steel	**SR-1-85 AI**	2CLA852620A1401	1
Antique Gold	**SR-1-85 OE**	2CLA852620A1201	1

Cover plate - free@home 1-gang sensors - Switch

Cover plate for free@home sensors and sensor/actuators with 1-gang sensors code: SU-F-1.0.1, SSA-F-1.1.1, SDA-F-1.1.1, SBA-F-1.1.1, SU-F-1.0.1-WL, SSA-F-1.1.1-WL, SDA-F-1.1.1-WL, SBA-F-1.1.1-WL.
With Light symbol.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRL-1-85 BL**	2CLA852626A1101	1
Silver	**SRL-1-85 PL**	2CLA852626A1301	1
Soft Black	**SRL-1-85 NS**	2CLA852626A1501	1
Dune	**SRL-1-85 DN**	2CLA852626A6201	1
Taupé	**SRL-1-85 TP**	2CLA852626A6301	1
Comodoro	**SRL-1-85 CM**	2CLA852626A1901	1
Stainless Steel	**SRL-1-85 AI**	2CLA852626A1401	1
Antique Gold	**SRL-1-85 OE**	2CLA852626A1201	1

Cover plate - free@home 1-gang sensors - Dimmer

Cover plate for free@home sensors and sensor/actuators with 1-gang sensors code: SU-F-1.0.1, SSA-F-1.1.1, SDA-F-1.1.1, SBA-F-1.1.1, SU-F-1.0.1-WL, SSA-F-1.1.1-WL, SDA-F-1.1.1-WL, SBA-F-1.1.1-WL.
With Dimming symbol.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRD-1-85 BL**	2CLA852625A1101	1
Silver	**SRD-1-85 PL**	2CLA852625A1301	1
Soft Black	**SRD-1-85 NS**	2CLA852625A1501	1
Dune	**SRD-1-85-DN**	2CLA852625A6201	1
Taupé	**SRD-1-85-TP**	2CLA852625A6301	1
Comodoro	**SRD-1-85-CM**	2CLA852625A1901	1
Stainless Steel	**SRD-1-85 AI**	2CLA852625A1401	1
Antique Gold	**SRD-1-85 OE**	2CLA852625A1201	1

Cover plate - free@home 1-gang sensors - Blind

Cover plate for free@home sensors and sensor/actuators with 1-gang sensors code: SU-F-1.0.1, SSA-F-1.1.1, SDA-F-1.1.1, SBA-F-1.1.1, SU-F-1.0.1-WL, SSA-F-1.1.1-WL, SDA-F-1.1.1-WL, SBA-F-1.1.1-WL.
With Blind symbol.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRB-1-85 BL**	2CLA852623A1101	1
Silver	**SRB-1-85 PL**	2CLA852623A1301	1
Soft Black	**SRB-1-85 NS**	2CLA852623A1501	1
Dune	**SRB-1-85-DN**	2CLA852623A6201	1
Taupé	**SRB-1-85-TP**	2CLA852623A6301	1
Comodoro	**SRB-1-85-CM**	2CLA852623A1901	1
Stainless Steel	**SRB-1-85 AI**	2CLA852623A1401	1
Antique Gold	**SRB-1-85 OE**	2CLA852623A1201	1

Cover plate - free@home 1-gang sensors - Scene

Cover plate for free@home sensors and sensor/actuators with 1-gang sensors code: SU-F-1.0.1, SSA-F-1.1.1, SDA-F-1.1.1, SBA-F-1.1.1, SU-F-1.0.1-WL, SSA-F-1.1.1-WL, SDA-F-1.1.1-WL, SBA-F-1.1.1-WL.
With Scene symbol.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRS-1-85 BL**	2CLA852627A1101	1
Silver	**SRS-1-85 PL**	2CLA852627A1301	1
Soft Black	**SRS-1-85 NS**	2CLA852627A1501	1
Dune	**SRS-1-85-DN**	2CLA852627A6201	1
Taupé	**SRS-1-85-TP**	2CLA852627A6301	1
Comodoro	**SRS-1-85-CM**	2CLA852627A1901	1
Stainless Steel	**SRS-1-85 AI**	2CLA852627A1401	1
Antique Gold	**SRS-1-85 OE**	2CLA852627A1201	1

Cover plate - free@home 2-gang sensors

Cover plate for free@home sensors and sensor/actuators with 2-gang sensors code: SU-F-2.0.1, SSA-F-2.1.1, SSA-F-2.2.1, SDA-F-2.1.1, SBA-F-2.1.1, SU-F-2.0.1-WL, SSA-F-2.1.1-WL, SSA-F-2.2.1-WL, SDA-F-2.1.1-WL, SBA-F-2.1.1-WL.
Without symbol. Suitable for both gangs.

Colour	Type	Order code	Pack/Qty.
Soft White	**SR-2-85 BL**	2CLA852640A1101	1
Silver	**SR-2-85 PL**	2CLA852640A1301	1
Soft Black	**SR-2-85 NS**	2CLA852640A1501	1
Dune	**SR-2-85-DN**	2CLA852640A6201	1
Taupé	**SR-2-85-TP**	2CLA852640A6301	1
Comodoro	**SR-2-85-CM**	2CLA852640A1901	1
Stainless Steel	**SR-2-85 AI**	2CLA852640A1401	1
Antique Gold	**SR-2-85 OE**	2CLA852640A1201	1

Sky Niessen - Free@home - Home automation

Cover plates

Cover plate - free@home 2-gang sensors - Switch - Left

Cover plate for free@home sensors and sensor/actuators with 2-gang sensors code: SU-F-2.0.1, SSA-F-2.1.1, SSA-F-2.2.1, SDA-F-2.1.1, SBA-F-2.1.1, SU-F-2.0.1-WL, SSA-F-2.1.1-WL, SSA-F-2.2.1-WL, SDA-F-2.1.1-WL, SBA-F-2.1.1-WL.
With Light symbol.
Suitable for the left gang.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRL-2-L-85 BL**	2CLA852642A1101	1
Silver	**SRL-2-L-85 PL**	2CLA852642A1301	1
Soft Black	**SRL-2-L-85 NS**	2CLA852642A1501	1
Dune	**SRL-2-L-85-DN**	2CLA852642A6201	1
Taupé	**SRL-2-L-85-TP**	2CLA852642A6301	1
Comodoro	**SRL-2-L-85-CM**	2CLA852642A1901	1
Stainless Steel	**SRL-2-L-85 AI**	2CLA852642A1401	1
Antique Gold	**SRL-2-L-85 OE**	2CLA852642A1201	1

Cover plate - free@home 2-gang sensors - Switch - Right

Cover plate for free@home sensors and sensor/actuators with 2-gang sensors code: SU-F-2.0.1, SSA-F-2.1.1, SSA-F-2.2.1, SDA-F-2.1.1, SBA-F-2.1.1, SU-F-2.0.1-WL, SSA-F-2.1.1-WL, SSA-F-2.2.1-WL, SDA-F-2.1.1-WL, SBA-F-2.1.1-WL.
With Light symbol.
Suitable for the right gang.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRL-2-R-85 BL**	2CLA852648A1101	1
Silver	**SRL-2-R-85 PL**	2CLA852648A1301	1
Soft Black	**SRL-2-R-85 NS**	2CLA852648A1501	1
Dune	**SRL-2-R-85-DN**	2CLA852648A6201	1
Taupé	**SRL-2-R-85-TP**	2CLA852648A6301	1
Comodoro	**SRL-2-R-85-CM**	2CLA852648A1901	1
Stainless Steel	**SRL-2-R-85 AI**	2CLA852648A1401	1
Antique Gold	**SRL-2-R-85 OE**	2CLA852648A1201	1

Cover plate - free@home 2-gang sensors - Dimmer - Left

Cover plate for free@home sensors and sensor/actuators with 2-gang sensors code: SU-F-2.0.1, SSA-F-2.1.1, SSA-F-2.2.1, SDA-F-2.1.1, SBA-F-2.1.1, SU-F-2.0.1-WL, SSA-F-2.1.1-WL, SSA-F-2.2.1-WL, SDA-F-2.1.1-WL, SBA-F-2.1.1-WL.
With Dimming symbol. Suitable for the left gang.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRD-2-L-85 BL**	2CLA852641A1101	1
Silver	**SRD-2-L-85 PL**	2CLA852641A1301	1
Soft Black	**SRD-2-L-85 NS**	2CLA852641A1501	1
Dune	**SRD-2-L-85-DN**	2CLA852641A6201	1
Taupé	**SRD-2-L-85-TP**	2CLA852641A6301	1
Comodoro	**SRD-2-L-85-CM**	2CLA852641A1901	1
Stainless Steel	**SRD-2-L-85 AI**	2CLA852641A1401	1
Antique Gold	**SRD-2-L-85 OE**	2CLA852641A1201	1

Cover plate - free@home 2-gang sensors - Dimmer - Right

Cover plate for free@home sensors and sensor/actuators with 2-gang sensors code: SU-F-2.0.1, SSA-F-2.1.1, SSA-F-2.2.1, SDA-F-2.1.1, SBA-F-2.1.1, SU-F-2.0.1-WL, SSA-F-2.1.1-WL, SSA-F-2.2.1-WL, SDA-F-2.1.1-WL, SBA-F-2.1.1-WL.
With Dimming symbol. Suitable for the right gang.
Suitable for both gangs.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRD-2-R-85 BL**	2CLA852647A1101	1
Silver	**SRD-2-R-85 PL**	2CLA852647A1301	1
Soft Black	**SRD-2-R-85 NS**	2CLA852647A1501	1
Dune	**SRD-2-R-85-DN**	2CLA852647A6201	1
Taupé	**SRD-2-R-85-TP**	2CLA852647A6301	1
Comodoro	**SRD-2-R-85-CM**	2CLA852647A1901	1
Stainless Steel	**SRD-2-R-85 AI**	2CLA852647A1401	1
Antique Gold	**SRD-2-R-85 OE**	2CLA852647A1201	1

Cover plate - free@home 2-gang sensors - Blind

Cover plate for free@home sensors and sensor/actuators with 2-gang sensors code: SU-F-2.0.1, SSA-F-2.1.1, SSA-F-2.2.1, SDA-F-2.1.1, SBA-F-2.1.1, SU-F-2.0.1-WL, SSA-F-2.1.1-WL, SSA-F-2.2.1-WL, SDA-F-2.1.1-WL, SBA-F-2.1.1-WL.
With Blind symbol.
Suitable for both gangs.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRB-2-85 BL**	2CLA852643A1101	1
Silver	**SRB-2-85 PL**	2CLA852643A1301	1
Soft Black	**SRB-2-85 NS**	2CLA852643A1501	1
Dune	**SRB-2-85-DN**	2CLA852643A6201	1
Taupé	**SRB-2-85-TP**	2CLA852643A6301	1
Comodoro	**SRB-2-85-CM**	2CLA852643A1901	1
Stainless Steel	**SRB-2-85 AI**	2CLA852643A1401	1
Antique Gold	**SRB-2-85 OE**	2CLA852643A1201	1

Cover plate - free@home 2-gang sensors - Scene - Left

Cover plate for free@home sensors and sensor/actuators with 2-gang sensors code: SU-F-2.0.1, SSA-F-2.1.1, SSA-F-2.2.1, SDA-F-2.1.1, SBA-F-2.1.1, SU-F-2.0.1-WL, SSA-F-2.1.1-WL, SSA-F-2.2.1-WL, SDA-F-2.1.1-WL, SBA-F-2.1.1-WL.
With Scene symbol.
Suitable for the left gang.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRS-2-L-85 BL**	2CLA852644A1101	1
Silver	**SRS-2-L-85 PL**	2CLA852644A1301	1
Soft Black	**SRS-2-L-85 NS**	2CLA852644A1501	1
Dune	**SRS-2-L-85-DN**	2CLA852644A6201	1
Taupé	**SRS-2-L-85-TP**	2CLA852644A6301	1
Comodoro	**SRS-2-L-85-CM**	2CLA852644A1901	1
Stainless Steel	**SRS-2-L-85 AI**	2CLA852644A1401	1
Antique Gold	**SRS-2-L-85 OE**	2CLA852644A1201	1

Sky Niessen - Free@home - Home automation

Cover plates

Cover plate - free@home 2-gang sensors - Scene - Right

Cover plate for free@home sensors and sensor/actuators with 2-gang sensors code: SU-F-2.0.1, SSA-F-2.1.1, SSA-F-2.2.1, SDA-F-2.1.1, SBA-F-2.1.1, SU-F-2.0.1-WL, SSA-F-2.1.1-WL, SSA-F-2.2.1-WL, SDA-F-2.1.1-WL, SBA-F-2.1.1-WL.
With Scene symbol.
Suitable for the right gang.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRS-2-R-85 BL**	2CLA852649A1101	1
Silver	**SRS-2-R-85 PL**	2CLA852649A1301	1
Soft Black	**SRS-2-R-85 NS**	2CLA852649A1501	1
Dune	**SRS-2-R-85-DN**	2CLA852649A6201	1
Taupé	**SRS-2-R-85-TP**	2CLA852649A6301	1
Comodoro	**SRS-2-R-85-CM**	2CLA852649A1901	1
Stainless Steel	**SRS-2-R-85 AI**	2CLA852649A1401	1
Antique Gold	**SRS-2-R-85 OE**	2CLA852649A1201	1

Cover plate - free@home RTC

Cover plate with RTC symbols for free@home room temperature controler code: RTC-F-1, RTC-F-1-WL and RTC-F-2.1-1-WL.

Colour	Type	Order code	Pack/Qty.
Soft White	**CP-RTC-85 BL**	2CLA854060A1101	1
Silver	**CP-RTC-85 PL**	2CLA854060A1301	1
Soft Black	**CP-RTC-85 NS**	2CLA854060A1501	1
Dune	**CP-RTC-85-DN**	2CLA854060A6201	1
Taupé	**CP-RTC-85-TP**	2CLA854060A6301	1
Comodoro	**CP-RTC-85-CM**	2CLA854060A1901	1
Stainless Steel	**CP-RTC-85 AI**	2CLA854060A1401	1
Antique Gold	**CP-RTC-85 OE**	2CLA854060A1201	1

Cover plate - free@home fan coil control

Cover plate with fan coil control symbols for free@home room temperature controler code: RTC-F-1 and RTC-F-1-WL.

Colour	Type	Order code	Pack/Qty.
Soft White	**CP-RTC-FC-85 BL**	2CLA855420A1101	1
Silver	**CP-RTC-FC-85 PL**	2CLA855420A1301	1
Soft Black	**CP-RTC-FC-85 NS**	2CLA855420A1501	1
Dune	**CP-RTC-FC-85-DN**	2CLA855420A6201	1
Taupé	**CP-RTC-FC-85-TP**	2CLA855420A6301	1
Comodoro	**CP-RTC-FC-85-CM**	2CLA855420A1901	1
Stainless Steel	**CP-RTC-FC-85 AI**	2CLA855420A1401	1
Antique Gold	**CP-RTC-FC-85 OE**	2CLA855420A1201	1

Cover plate - free@home motion sensor

Cover plate for free@home motion sensors and sensor/actuators code: MD-F-1.0.PB.1 and MSA-F.1.1.PB.1.

Colour	Type	Order code	Pack/Qty.
Soft White	**CP-MD-85 BL**	2CLA854160A1101	1
Silver	**CP-MD-85 PL**	2CLA854160A1301	1
Soft Black	**CP-MD-85 NS**	2CLA854160A1501	1
Dune	**CP-MD-85-DN**	2CLA854160A6201	1
Taupé	**CP-MD-85-TP**	2CLA854160A6301	1
Comodoro	**CP-MD-85-CM**	2CLA854160A1901	1
Stainless Steel	**CP-MD-85 AI**	2CLA854160A1401	1
Antique Gold	**CP-MD-85 OE**	2CLA854160A1201	1

Sky Niessen

Touch displays

ABB-free@homeTouch 7"

For the central control of up to 16 configurable ABB-free@home® functions of type: switching, dimming, blind, RTC, scene, Philips HUE.
Display of the video image of the outdoor station of ABB-Welcome door entry system.
Suitable as room temperature controller extension unit (up to 8).
Surface mounting.
The bus can be connected via enclosed terminal block.
Display size / resolution: 17.8 cm (7") / 800 x 480
Consumer units: 11
Display elements: TFT Touch Display
Dimensions: (L x W x D): 155 mm x 218 mm x 29 mm
Programming only with bus voltage applied via the web interface of the System Access Point.
The power is supplied by the ABB-Welcome system controller or when using the ABB-free@home panel without an ABB-Welcome system, a separate ABB 24 V- power supply is required.
Protection class (device): IP30
Temperature range (device): -5 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
White	**DP7-S-611**	2CKA008300A0356	1
Black	**DP7-S-625**	2CKA008300A0357	1

ABB-free@homeTouch 4.3"

For the central control of up to 16 configurable ABB-free@home® functions.
For the display of configurable system messages.
A configurable primary function can be triggered with a multi-touch gesture.
Capacitive touch screen with closed glass surface.
With integrated room temperature controller and temperature sensor.
In connection with temperature sensor 6226/T the integrated room temperature controller can be fitted with a remote sensor.
Suitable as room temperature controller extension unit (up to 8).
Requires additional ABB power supply 24 VDC.
Display size / resolution: 10.9 cm (4.3") / 480 x 854.
Mounting height: 8 mm
Control element: freely programmable touch surfaces.
Display elements: LCD display
Bus voltage: 24 V-
Dimensions: (L x W x D): 104 mm x 143 mm x 53 mm
Programming only with bus voltage applied via the web interface of the System Access Point.
Protection class (device): IP20
Temperature range (device): -5 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
White	**DP4-1-611**	2CKA006220A0119	1
Black	**DP4-1-625**	2CKA006220A0120	1

Flush mounting installation box

For flush-mounted in hollow-wall installation of the ABB-free@homeTouch 4.3".
Windproof.
Installation dimensions (H x W x D):
82 mm x 123 mm x 50 mm
Mounting depth: 50 mm
Halogen free.

Colour	Type	Order code	Pack/Qty.
	DP4-F	2CKA006220A0389	1

Temperature sensor

For use as remote sensor with ABB- free@homeTouch 4.3".
Line type: H03 VV-F
Cable length: 4 m
Type: NTC 10 kohm.

Colour	Type	Order code	Pack/Qty.
	DP4-T-1	2CKA006220A0721	1

Sky Niessen

System Access Point

System Access Point - Wireless

For commissioning and remote control of the ABB-free@home® system.
With integrated free@home wireless antenna.
With integrated free@home bus connection.
Allows the execution of astro and time programs.
Commissioning and remote control is executed via the web interface or app.
No additional commissioning software is required.
Easy commissioning with WLAN ad-hoc mode.
WLAN modes switchable via local operation.
Connection to the home network via WLAN client mode or via CAT cable.
The bus connection is provided via the enclosed bus terminal.
Display elements: LED for status display.
Rated voltage: 230 V~; 50/60 Hz.
Bus voltage: 24 V.
Dimensions: (L x W x D): 110 mm x 170 mm x 31 mm
Programming via the web interface of the System Access Point.
Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C

Colour	Type	Order code	Pack/Qty.
	SAP-S-2	2CKA006200A0105	1

External antenna - Wireless

For use with System Access Point SAP-S-2 and SAP-S-127.2.
Feed the free@home wireless signal to the outside when the internal antenna of the System Access Point is shielded due to structural conditions.
With magnetic base.
Cable length: 1.5 m

Colour	Type	Order code	Pack/Qty.
	SAP-1-WL	2CKA006200A0100	1

Weather station

Weather station

For recording and transmitting of brightness, temperature, wind speed and rain.
Weather data can be linked with actuators to automatically control functions.
Weather data can be visualized in the free@home web interface and the free@home app.
Wind speed measuring range 2 - 30 m/s
The bus can be connected via enclosed terminal block.
Rated voltage: 110 V~ - 230 V~; 50/60 Hz.
Bus voltage: 24 V-
Inputs: 4
Temperature range (sensor):
Brightness limit value: 1 lux - 100000 lux
Dimensions: (L x W x D): 108 mm x 121 mm x 227 mm
Protection class (device): IP44
Temperature range (device): -20 °C to 55 °C

Colour	Type	Order code	Pack/Qty.
	WS-1	2CKA006220A0390	1

Power supply

Power supply

Power supply with integrated choke.
Fast diagnosis due to LED display for operational readiness and errors.
The bus can be connected via enclosed terminal block.
Display elements: operational load/overload LED
Rated voltage: 127 V~ - 230 V~, +10 % / -15 %; 50/60Hz
Secondary: 30 V, +2 V / --2 V
Outputs: 1
Rated current: 640 mA
Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 72 mm x 64 mm
Module width (DIN-rail): 4 MW

Colour	Type	Order code	Pack/Qty.
	PS-M-64.1.1	2CDG510001R0011	1

Sky Niessen

Binary inputs

Binary input 2-gang

Conventional push-buttons or auxiliary contacts can be connected to 2 channels. The information of the contact scanning can be used for activating ABB-free@home® actuators or for recording status information. The contact polling voltage is made available from the binary input itself. Extension of the connecting cables possible by a maximum of 10 m.
Flush-mounted device for installation in a 60 mm device box or distribution box.
The bus can be connected via enclosed terminal block.
Programming only with bus voltage applied via the web interface of the System Access Point.
Bus voltage: 24 V
Inputs: 2
Polling voltage: 20 V-
Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C
Dimensions: (L x W x D): 39 mm x 40 mm x 12 mm.

Colour	Type	Order code	Pack/Qty.
	BI-F-2.0.1	2CDG510002R0011	1

Binary input 4-gang

Conventional push-buttons or auxiliary contacts can be connected to 4 channels. The information of the contact scanning can be used for activating ABB-free@home® actuators or for recording status information. The contact polling voltage is made available from the binary input itself. Extension of the connecting cables possible by a maximum of 10 m.
Flush-mounted device for installation in a 60 mm device box or distribution box.
The bus can be connected via enclosed terminal block.
Programming only with bus voltage applied via the web interface of the System Access Point.
Bus voltage: 24 V
Inputs: 4
Polling voltage: 20 V-
Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C
Dimensions: (L x W x D): 39 mm x 40 mm x 12 mm

Colour	Type	Order code	Pack/Qty.
	BI-F-4.0.1	2CDG510003R0011	1

Binary input 4-gang

The device detects AC/DC signals of 10 - 230 V via 4 channels. The information of the signal evaluation can be used for controlling ABB-free@home® actuators or for recording status information.
The bus can be connected via enclosed terminal block.
Programming only with bus voltage applied via the web interface of the System Access Point.
Bus voltage: 24 V
Inputs: 4
Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 36 mm x 64 mm
Module width DIN-rail): 2 MW

Colour	Type	Order code	Pack/Qty.
	BI-M-4.0.1	2CDG510004R0011	1

Switch actuators

Binary input 8-gang / switch actuator 8-gang

Combination device with 8 binary inputs and 8 switch actuators.
Conventional push-buttons or auxiliary contacts can be connected to 8 channels. The information of the contact scanning can be used for activating ABB-free@home® actuators or for recording status information.
The contact polling voltage is made available by the device itself.
Maximum cable length at a cable cross-section of 1.5 mm^2 < 100 m
For switching 8 independent 230 V~ loads.
No additional commissioning software is required.
Programming only with bus voltage applied via the web interface of the System Access Point.
Bus voltage: 24 V
Inputs: 8
Polling voltage: 35 V-
Outputs: 8 Normally Open contact, potential free
Suitable for: AC1 (Output voltage: 230 V~)
Rated current: 6 A, cos φ 0.8
Suitable for: AC3 (Output voltage: 230 V~)
Rated current: 6 A, cos φ 0.45
Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 144 mm x 64.5 mm
Module width (DIN-rail): 8 MW.

Colour	Type	Order code	Pack/Qty.
	SA-M-8.8.1	2CDG510007R0011	1

Switch actuator 4-gang

For switching 4 independent 127 V~/230 V~ loads.
Each contact has a manual operation function independent of auxiliary voltage for additionally displaying the contact setting.
The bus can be connected via enclosed terminal block.
Control element: relay control element.
Display elements: relay control element.
Programming only with bus voltage applied via the web interface of the System Access Point.
Power dissipation: 4 W
Bus voltage: 24 V
Outputs: 4
Suitable for: AC1 (Output voltage: 230 V~)
Rated current: 16 A, cos φ 0.8
Suitable for: AC3
Rated current: 8 A, cos φ 0.45
Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 72 mm x 64 mm
Module width (DIN-rail): 4 MW.

Colour	Type	Order code	Pack/Qty.
	SA-M-0.4.1	2CDG510006R0011	1

Sky Niessen

Dimmer actuator

Dimming actuator 4-gang

Multi-channel universal dimming actuator for controlling LEDs, incandescent lamps, 230 V halogen lamps, low-voltage halogen lamps with conventional or electronic transformers, and dimmable energy-saving halogen lamps. For dimmable Retrofit-LEDs (LEDi).
Increasing the max. load via channel bridging possible.
The outputs can be switched parallel in any combination.
Outputs automatically recognize the connected load.
In addition, the operating mode can be selected manually.
Status indication of the channels via LED.
The bus can be connected via enclosed terminal block.
Display elements: outputs status indication via LED.
Programming only with bus voltage applied via the web interface of the System Access Point.
Rated voltage: 230 V~; 50/60 Hz
Bus voltage: 24 V
Outputs: 4 dimming channel
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformer.
Rated power: 10 - 315 W/VA
Suitable for: LEDi and energy-saving bulbs; typical
Rated power: 2 - 80 W/VA
Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 144 mm x 64 mm
Module width (DIN-rail): 8 MW.

Colour	Type	Order code	Pack/Qty.
	DA-M-0.4.2	2CKA006220A0395	1

Blind actuator

Blind actuator 4-gang

For controlling 4 independent blind or roller shutter drives.
The outputs are inversely blocked.
The bus can be connected via enclosed terminal block.
Programming only with bus voltage applied via the web interface of the System Access Point.
Power dissipation: 2 W
Bus voltage: 24 V
Outputs: 4
Suitable for: AC3 (Output voltage: 230 V~)
Rated current: 6 A, cos ϕ0.45
Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 72 mm x 64 mm
Module width (DIN-rail): 4 MW.

Colour	Type	Order code	Pack/Qty.
	BA-M-0.4.1	2CDG510011R0011	1

Heating & fan coil actuators

Heating actuator 6-gang

For controlling thermoelectric actuating drives in heating/cooling systems.
The outputs are protected against short-circuit and overload.
The bus can be connected via enclosed terminal block.
Programming only with bus voltage applied via the web interface of the System Access Point.
Power dissipation: 2 W
Bus voltage: 24 V. Outputs: 6
Suitable for: resistive. Rated current: 160 mA
Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C.
Dimensions: (L x W x D): 90 mm x 72 mm x 64 mm.
Module width (DIN-rail): 4 MW.

Colour	Type	Order code	Pack/Qty.
	HA-M-0.6.1	2CDG510008R0011	1

Heating actuator 12-gang

For controlling thermoelectric actuating drives in heating/cooling systems.
The outputs are protected against short-circuit and overload.
The bus can be connected via enclosed terminal block.
Programming only with bus voltage applied via the web interface of the System Access Point.
Power dissipation: 4 W
Bus voltage: 24 V. Outputs: 12
Suitable for: ohmic. Rated current: 160 mA
Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 144 mm x 64 mm.
Module width: 8 MW.

Colour	Type	Order code	Pack/Qty.
	HA-M-0.12.1	2CDG510009R0011	1

Fan coil actuator

For controlling blower convectors. Supports 2-pipe and 4-pipe system for heating and cooling. The fan speed levels can be switched using a changeover or step switch function.
Three contacts for switching a three-stage fan.
Two contacts for activating the heating and cooling valves.
Supports 24V and 230V valves.
With two binary inputs for connecting dew-point and condensation contacts.
The scanning voltage is provided by the device.
The bus connection is provided via the enclosed bus terminal.
Programming only with bus voltage applied via the web interface of the System Access Point.
Bus voltage: 24 V. Inputs: 2
Polling voltage: 10 V-
Outputs: 3 Normally Open contact, potential free
Suitable for: AC3 (Output voltage: 230 V~)
Rated current: 6 A. Protection class (device): IP20
Temperature range (device): -5 °C to 45 °C.
Dimensions: (L x W x D): 90 mm x 108 mm x 64.5 mm.
Module width (DIN-rail): 6 MW.

Colour	Type	Order code	Pack/Qty.
	FCA-M-2.3.1	2CDG510010R0011	1

Sky Niessen - KNX - Building automation

Push-button coupler

KNX Push-button coupler - 1/2-gang

For contacting conventional 1-gang rocker switches.
With middle position.
The bus can be connected via enclosed terminal block.
To be installed with 8501 rockers.

Colour	Type	Order code	Pack/Qty.
	6108/01-509	2CKA006133A0214	1

KNX Push-button coupler - 2/4-gang

For contacting conventional 2-gang rocker switches.
With middle position.
The bus can be connected via enclosed terminal block.
To be installed with 8511 rockers.

Colour	Type	Order code	Pack/Qty.
	6108/02-509	2CKA006133A0215	1

Rockers

Rocker for switch, 1-gang

Rocker for 6108/01-509 KNX Push-button coupler.

Colour	Type	Order code	Pack/Qty.
Soft White	**8501 BL**	2CLA850100A1101	20
Silver	**8501 PL**	2CLA850100A1301	20
Soft Black	**8501 NS**	2CLA850100A1501	20
Dune	**8501 DN**	2CLA850100A6201	10
Taupé	**8501 TP**	2CLA850100A6301	10
Comodoro	**8501 CM**	2CLA850100A1901	10
Stainless Steel	**8501 AI**	2CLA850100A1401	20
Antique Gold	**8501 OE**	2CLA850100A1201	20
White Glass	**8501 CB**	2CLA850100A2101	10
Black Glass	**8501 CN**	2CLA850100A2501	10

Rocker for switch/push-button, 2-gangs

Rocker for 6108/02-509 KNX Push-button coupler.

Colour	Type	Order code	Pack/Qty.
Soft White	**8511 BL**	2CLA851100A1101	20
Silver	**8511 PL**	2CLA851100A1301	20
Soft Black	**8511 NS**	2CLA851100A1501	20
Dune	**8511 DN**	2CLA851100A6201	10
Taupé	**8511 TP**	2CLA851100A6301	10
Comodoro	**8511 CM**	2CLA851100A1901	10
Stainless Steel	**8511 AI**	2CLA851100A1401	20
Antique Gold	**8511 OE**	2CLA851100A1201	20
White Glass	**8511 CB**	2CLA851100A2101	10
Black Glass	**8511 CN**	2CLA851100A2501	10

Sky Niessen - KNX - Building automation

Sensor

KNX Push-button coupler - 2-gang with bus coupler

With integrated temperature sensor.
Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green.
With middle position.
The bus can be connected via enclosed terminal block.
Control element: switch contacts top/bottom.
Display elements: 2 LED per rocker via separate communication object for status (Red/ Green/ OFF) or orientation light.
Connections: KNX-line - bus connection terminal.
Rated voltage: 24 V-, +5 V / -5 V.
Temperature range device: -5 °C to 45 °C.
To be installed with SR-1-85, SRL-1-85, SRD-1-85, SRB-1-85 and SRS-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	6108/06-500	2CKA006133A0221	1

KNX Push-button coupler - 4-gang with bus coupler

With integrated temperature sensor.
Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green.
With middle position.
The bus can be connected via enclosed terminal block.
Control element: switch contacts top/bottom.
Display elements: 2 LED per rocker via separate communication object for status (Red/ Green/ OFF) or orientation light.
Connections: KNX-line - bus connection terminal.
Rated voltage: 24 V-, +5 V / -5 V.
Temperature range device: -5 °C to 45 °C.
To be installed with SR-2-85, SRL-2-L-85 SRL-2-R-85, SRD-2-L-85, SRD-2-R-85, SRB-2-85 SRS-2-L-85 and SRS-2-R-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	6108/07-500	2CKA006133A0223	1

KNX Room thermostat with display

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators.
For controlling commercially available valve drives.
With display of set-value temperature.
Master/slave configuration.
With base-load operation.
The bus can be connected via enclosed terminal block.
Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Control element: switch contacts.
Display elements: LCD showing operation mode and temperature.
Connections: KNX-line - bus connection terminal.
Rated voltage / current: 24 V- / 5 mA.
Temperature range device: -5 °C to 45 °C.
To be installed with CP-RTC-85 cover plates for RTC or CP-RTC-FC-85 cover plates for fan coil control.

Colour	Type	Order code	Pack/Qty.
	6108/18-500	2CKA006134A0319	1

KNX RTC with 5-gang universal input

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators.
With universal input with:
- max. of 5 binary inputs.
- 4 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V
- 2 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V and an external temperature sensor PT1000 / T6226.
With display of set-value temperature.
Master/slave configuration. With base-load operation.
The bus can be connected via enclosed terminal block.
Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Control element: switch contacts. Display elements: LCD showing operation mode and temperature. Connections: KNX-line - bus connection terminal. Rated voltage / current: 24 V- / 5 mA.
Inputs: 5. Polling voltage: binary inputs, presence and/ or window contact. Control/Signal outputs: 1, 0-10 V (passive). Temperature range device: -5 °C to 45 °C.
Tobe installed with CP-CO-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	6109/18-500	2CKA006134A0315	1

KNX RTC with CO_2/moisture sensor

Control element with room temperature controller function and CO_2/moisture/air pressure sensor.
For activating heating, ventilation and fan coil actuators.
With universal input with:
- max. of 5 binary inputs.
- 4 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V.
- 2 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V and an external temperature sensor PT1000 / T6226.
With display of set-value temperature.
Master/slave configuration. With base-load operation.
The bus can be connected via enclosed terminal block.
Class of temperature controller 1. Contribution to space heating energy efficiency 1,0%. Control element: switch contacts. Display elements: LCD showing operation mode and temperature. Connections: KNX-line - bus connection terminal. Rated voltage / current: 24 V- / 5 mA.
Inputs: 5. Polling voltage: binary inputs, presence and/ or window contact. Control/Signal outputs: 1, 0-10 V (passive). Temperature range device: -5 °C to 45 °C.

Colour	Type	Order code	Pack/Qty.
	6109/28-500	2CKA006134A0317	1

KNX 180° motion sensor

Movement detector with up to 4 channels.
Detection range: frontal: 6 m, lateral: 6 m.
Brightness limit value: 5 lux - 150 lux.
Detection angle: 180°.
Position for installation: vertical.
Mounting height: 1.1 m.
Temperature range (device): -5 °C to 45 °C.
To be installed with CP-MD-85 cover plates (mounting grid without claws included).

Colour	Type	Order code	Pack/Qty.
	6122/98-509	2CKA006132A0307	1

Sky Niessen - KNX - Building automation

Cover plates

Cover plate - KNX 1-gang sensors

Cover plate for KNX 1-gang sensors code: 6108/06-500.
Without symbol.

Colour	Type	Order code	Pack/Qty.
Soft White	**SR-1-85 BL**	2CLA852620A1101	1
Silver	**SR-1-85 PL**	2CLA852620A1301	1
Soft Black	**SR-1-85 NS**	2CLA852620A1501	1
Dune	**SR-1-85-DN**	2CLA852620A6201	1
Taupé	**SR-1-85-TP**	2CLA852620A6301	1
Comodoro	**SR-1-85-CM**	2CLA852620A1901	1
Stainless Steel	**SR-1-85 AI**	2CLA852620A1401	1
Antique Gold	**SR-1-85 OE**	2CLA852620A1201	1

Cover plate - KNX 1-gang sensors - Blind

Cover plate for KNX 1-gang sensors code: 6108/06-500.
With Blind symbol.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRB-1-85 BL**	2CLA852623A1101	1
Silver	**SRB-1-85 PL**	2CLA852623A1301	1
Soft Black	**SRB-1-85 NS**	2CLA852623A1501	1
Dune	**SRB-1-85-DN**	2CLA852623A6201	1
Taupé	**SRB-1-85-TP**	2CLA852623A6301	1
Comodoro	**SRB-1-85-CM**	2CLA852623A1901	1
Stainless Steel	**SRB-1-85 AI**	2CLA852623A1401	1
Antique Gold	**SRB-1-85 OE**	2CLA852623A1201	1

Cover plate - KNX 1-gang sensors - Switch

Cover plate for KNX 1-gang sensors code: 6108/06-500.
With Light symbol.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRL-1-85 BL**	2CLA852626A1101	1
Silver	**SRL-1-85 PL**	2CLA852626A1301	1
Soft Black	**SRL-1-85 NS**	2CLA852626A1501	1
Dune	**SRL-1-85 DN**	2CLA852626A6201	1
Taupé	**SRL-1-85 TP**	2CLA852626A6301	1
Comodoro	**SRL-1-85 CM**	2CLA852626A1901	1
Stainless Steel	**SRL-1-85 AI**	2CLA852626A1401	1
Antique Gold	**SRL-1-85 OE**	2CLA852626A1201	1

Cover plate - KNX 1-gang sensors - Scene

Cover plate for KNX 1-gang sensors code: 6108/06-500.
With Scene symbol.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRS-1-85 BL**	2CLA852627A1101	1
Silver	**SRS-1-85 PL**	2CLA852627A1301	1
Soft Black	**SRS-1-85 NS**	2CLA852627A1501	1
Dune	**SRS-1-85-DN**	2CLA852627A6201	1
Taupé	**SRS-1-85-TP**	2CLA852627A6301	1
Comodoro	**SRS-1-85-CM**	2CLA852627A1901	1
Stainless Steel	**SRS-1-85 AI**	2CLA852627A1401	1
Antique Gold	**SRS-1-85 OE**	2CLA852627A1201	1

Cover plate - KNX 1-gang sensors - Dimmer

Cover plate for KNX 1-gang sensors code: 6108/06-500.
With Dimming symbol.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRD-1-85 BL**	2CLA852625A1101	1
Silver	**SRD-1-85 PL**	2CLA852625A1301	1
Soft Black	**SRD-1-85 NS**	2CLA852625A1501	1
Dune	**SRD-1-85-DN**	2CLA852625A6201	1
Taupé	**SRD-1-85-TP**	2CLA852625A6301	1
Comodoro	**SRD-1-85-CM**	2CLA852625A1901	1
Stainless Steel	**SRD-1-85 AI**	2CLA852625A1401	1
Antique Gold	**SRD-1-85 OE**	2CLA852625A1201	1

Cover plate - KNX 2-gang sensors

Cover plate for KNX 2-gang sensors code: SU-F-2.0.1, SSA-F-2.1.1, SSA-F-2.2.1, SDA-F-2.1.1, SBA-F-2.1.1, SU-F-2.0.1-WL, SSA-F-2.1.1-WL, SSA-F-2.2.1-WL, SDA-F-2.1.1-WL, SBA-F-2.1.1-WL.
Without symbol. Suitable for both gangs.

Colour	Type	Order code	Pack/Qty.
Soft White	**SR-2-85 BL**	2CLA852640A1101	1
Silver	**SR-2-85 PL**	2CLA852640A1301	1
Soft Black	**SR-2-85 NS**	2CLA852640A1501	1
Dune	**SR-2-85-DN**	2CLA852640A6201	1
Taupé	**SR-2-85-TP**	2CLA852640A6301	1
Comodoro	**SR-2-85-CM**	2CLA852640A1901	1
Stainless Steel	**SR-2-85 AI**	2CLA852640A1401	1
Antique Gold	**SR-2-85 OE**	2CLA852640A1201	1

Sky Niessen - KNX - Building automation

Cover plates

Cover plate - KNX 2-gang sensors - Switch - Left

Cover plate for KNX 2-gang sensors code: 6108/07-500.
With Light symbol.
Suitable for the left gang.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRL-2-L-85 BL**	2CLA852642A1101	1
Silver	**SRL-2-L-85 PL**	2CLA852642A1301	1
Soft Black	**SRL-2-L-85 NS**	2CLA852642A1501	1
Dune	**SRL-2-L-85-DN**	2CLA852642A6201	1
Taupé	**SRL-2-L-85-TP**	2CLA852642A6301	1
Comodoro	**SRL-2-L-85-CM**	2CLA852642A1901	1
Stainless Steel	**SRL-2-L-85 AI**	2CLA852642A1401	1
Antique Gold	**SRL-2-L-85 OE**	2CLA852642A1201	1

Cover plate - KNX 2-gang sensors - Dimmer - Right

Cover plate for KNX 2-gang sensors code: 6108/07-500.
With Dimming symbol.
Suitable for the right gang.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRD-2-R-85 BL**	2CLA852640A2101	1
Silver	**SRD-2-R-85 PL**	2CLA852640A2301	1
Soft Black	**SRD-2-R-85 NS**	2CLA852640A2501	1
Dune	**SRD-2-R-85-DN**	2CLA852640A6201	1
Taupé	**SRD-2-R-85-TP**	2CLA852640A6301	1
Comodoro	**SRD-2-R-85-CM**	2CLA852640A1901	1
Stainless Steel	**SRD-2-R-85 AI**	2CLA852640A2401	1
Antique Gold	**SRD-2-R-85 OE**	2CLA852640A2201	1

Cover plate - KNX 2-gang sensors - Switch - Right

Cover plate for KNX 2-gang sensors code: 6108/07-500.
With Light symbol.
Suitable for the right gang.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRL-2-R-85 BL**	2CLA852648A1101	1
Silver	**SRL-2-R-85 PL**	2CLA852648A1301	1
Soft Black	**SRL-2-R-85 NS**	2CLA852648A1501	1
Dune	**SRL-2-R-85-DN**	2CLA852648A6201	1
Taupé	**SRL-2-R-85-TP**	2CLA852648A6301	1
Comodoro	**SRL-2-R-85-CM**	2CLA852648A1901	1
Stainless Steel	**SRL-2-R-85 AI**	2CLA852648A1401	1
Antique Gold	**SRL-2-R-85 OE**	2CLA852648A1201	1

Cover plate - KNX 2-gang sensors - Blind

Cover plate for KNX 2-gang sensors code: 6108/07-500.
With Blind symbol.
Suitable for both gangs.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRB-2-85 BL**	2CLA852643A1101	1
Silver	**SRB-2-85 PL**	2CLA852643A1301	1
Soft Black	**SRB-2-85 NS**	2CLA852643A1501	1
Dune	**SRB-2-85-DN**	2CLA852643A6201	1
Taupé	**SRB-2-85-TP**	2CLA852643A6301	1
Comodoro	**SRB-2-85-CM**	2CLA852643A1901	1
Stainless Steel	**SRB-2-85 AI**	2CLA852643A1401	1
Antique Gold	**SRB-2-85 OE**	2CLA852643A1201	1

Cover plate - KNX 2-gang sensors - Dimmer - Left

Cover plate for KNX 2-gang sensors code: 6108/07-500.
With Dimming symbol.
Suitable for the left gang.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRD-2-L-85 BL**	2CLA852641A1101	1
Silver	**SRD-2-L-85 PL**	2CLA852641A1301	1
Soft Black	**SRD-2-L-85 NS**	2CLA852641A1501	1
Dune	**SRD-2-L-85-DN**	2CLA852641A6201	1
Taupé	**SRD-2-L-85-TP**	2CLA852641A6301	1
Comodoro	**SRD-2-L-85-CM**	2CLA852641A1901	1
Stainless Steel	**SRD-2-L-85 AI**	2CLA852641A1401	1
Antique Gold	**SRD-2-L-85 OE**	2CLA852641A1201	1

Cover plate - KNX 2-gang sensors - Scene - Left

Cover plate for KNX 2-gang sensors code: 6108/07-500.
With Scene symbol.
Suitable for the left gang.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRS-2-L-85 BL**	2CLA852644A1101	1
Silver	**SRS-2-L-85 PL**	2CLA852644A1301	1
Soft Black	**SRS-2-L-85 NS**	2CLA852644A1501	1
Dune	**SRS-2-L-85-DN**	2CLA852644A6201	1
Taupé	**SRS-2-L-85-TP**	2CLA852644A6301	1
Comodoro	**SRS-2-L-85-CM**	2CLA852644A1901	1
Stainless Steel	**SRS-2-L-85 AI**	2CLA852644A1401	1
Antique Gold	**SRS-2-L-85 OE**	2CLA852644A1201	1

Sky Niessen - KNX - Building automation

Cover plates

Cover plate - KNX 2-gang sensors - Scene - Right

Cover plate for KNX 2-gang sensors code: 6108/07-500.
With Scene symbol.
Suitable for the right gang.

Colour	Type	Order code	Pack/Qty.
Soft White	**SRS-2-R-85 BL**	2CLA852647A1101	1
Silver	**SRS-2-R-85 PL**	2CLA852647A1301	1
Soft Black	**SRS-2-R-85 NS**	2CLA852647A1501	1
Dune	**SRS-2-R-85-DN**	2CLA852647A6201	1
Taupé	**SRS-2-R-85-TP**	2CLA852647A6301	1
Comodoro	**SRS-2-R-85-CM**	2CLA852647A1901	1
Stainless Steel	**SRS-2-R-85 AI**	2CLA852647A1401	1
Antique Gold	**SRS-2-R-85 OE**	2CLA852647A1201	1

Cover plate - KNX RTC

Cover plate with RTC symbols for KNX room temperature controler code: 6108/18-500.

Colour	Type	Order code	Pack/Qty.
Soft White	**CP-RTC-85 BL**	2CLA854060A1101	1
Silver	**CP-RTC-85 PL**	2CLA854060A1301	1
Soft Black	**CP-RTC-85 NS**	2CLA854060A1501	1
Dune	**CP-RTC-85-DN**	2CLA854060A6201	1
Taupé	**CP-RTC-85-TP**	2CLA854060A6301	1
Comodoro	**CP-RTC-85-CM**	2CLA854060A1901	1
Stainless Steel	**CP-RTC-85 AI**	2CLA854060A1401	1
Antique Gold	**CP-RTC-85 OE**	2CLA854060A1201	1

Cover plate - KNX fan coil control

Cover plate with fan coil control symbols for KNX room temperature controler code: 6108/18-500.

Colour	Type	Order code	Pack/Qty.
Soft White	**CP-RTC-FC-85 BL**	2CLA855420A1101	1
Silver	**CP-RTC-FC-85 PL**	2CLA855420A1301	1
Soft Black	**CP-RTC-FC-85 NS**	2CLA855420A1501	1
Dune	**CP-RTC-FC-85-DN**	2CLA855420A6201	1
Taupé	**CP-RTC-FC-85-TP**	2CLA855420A6301	1
Comodoro	**CP-RTC-FC-85-CM**	2CLA855420A1901	1
Stainless Steel	**CP-RTC-FC-85 AI**	2CLA855420A1401	1
Antique Gold	**CP-RTC-FC-85 OE**	2CLA855420A1201	1

Cover plate - KNX RTC with CO2/moisture sensor

Cover plate for KNX 5-gang RTC and CO2/moisture RTC sensor code: 6109/18-500 and 6109/28-500.

Colour	Type	Order code	Pack/Qty.
Soft White	**CP-CO-85 BL**	2CLA855430A1101	1
Silver	**CP-CO-85 PL**	2CLA855430A1301	1
Soft Black	**CP-CO-85 NS**	2CLA855430A1501	1
Stainless Steel	**CP-CO-85 AI**	2CLA855430A1401	1
Antique Gold	**CP-CO-85 OE**	2CLA855430A1201	1

Cover plate - KNX motion sensor

Cover plate for KNX motion sensors code: 6122/98-509.

Colour	Type	Order code	Pack/Qty.
Soft White	**CP-MD-85 BL**	2CLA854160A1101	1
Silver	**CP-MD-85 PL**	2CLA854160A1301	1
Soft Black	**CP-MD-85 NS**	2CLA854160A1501	1
Dune	**CP-MD-85-DN**	2CLA854160A6201	1
Taupé	**CP-MD-85-TP**	2CLA854160A6301	1
Comodoro	**CP-MD-85-CM**	2CLA854160A1901	1
Stainless Steel	**CP-MD-85 AI**	2CLA854160A1401	1
Antique Gold	**CP-MD-85 OE**	2CLA854160A1201	1

Sky Niessen - Frames

Soft White

Frames 1 to 5-gang - Soft White

Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.
- 5-gang: 86 x 370 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 BL**	2CLA857100A1101	20
2-gang	**8572 BL**	2CLA857200A1101	20
3-gang	**8573 BL**	2CLA857300A1101	10
4-gang	**8574 BL**	2CLA857400A1101	5
5-gang	**8575 BL**	2CLA857500A1101	5

Soft White Basic

Frames 1 to 4-gang - Basic - Soft White

Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571.1 BL**	2CLA857110A1101	20
2-gang	**8572.1 BL**	2CLA857210A1101	20
3-gang	**8573.1 BL**	2CLA857310A1101	10
4-gang	**8574.1 BL**	2CLA857410A1101	5

Silver

Frames 1 to 5-gang - Silver

Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.
- 5-gang: 86 x 370 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 PL**	2CLA857100A1301	20
2-gang	**8572 PL**	2CLA857200A1301	20
3-gang	**8573 PL**	2CLA857300A1301	10
4-gang	**8574 PL**	2CLA857400A1301	5
5-gang	**8575 PL**	2CLA857500A1301	5

Soft Black

Frames 1 to 5-gang - Soft Black

Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.
- 5-gang: 86 x 370 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 NS**	2CLA857100A1501	20
2-gang	**8572 NS**	2CLA857200A1501	20
3-gang	**8573 NS**	2CLA857300A1501	10
4-gang	**8574 NS**	2CLA857400A1501	5
5-gang	**8575 SB**	2CLA857500A1501	5

Soft White - Taupé

Frames 1 to 4-gang - Taupé

Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.
- 5-gang: 86 x 370 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 TP**	2CLA857100A6301	20
2-gang	**8572 TP**	2CLA857200A6301	20
3-gang	**8573 TP**	2CLA857300A6301	10
4-gang	**8574 TP**	2CLA857400A6301	5
5-gang	**8575 TP**	2CLA857500A6301	5

Dune

Frames 1 to 4-gang - Dune

Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.
- 5-gang: 86 x 370 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 DN**	2CLA857100A6201	20
2-gang	**8572 DN**	2CLA857200A6201	20
3-gang	**8573 DN**	2CLA857300A6201	10
4-gang	**8574 DN**	2CLA857400A6201	5
5-gang	**8575 DN**	2CLA857500A6201	5

Sky Niessen - Frames

Comodoro

Frames 1 to 4-gang - Comodoro

Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.
- 5-gang: 86 x 370 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 CM**	2CLA857100A1901	20
2-gang	**8572 CM**	2CLA857200A1901	20
3-gang	**8573 CM**	2CLA857300A1901	10
4-gang	**8574 CM**	2CLA857400A1901	5
5-gang	**8575 CM**	2CLA857500A1901	5

Stainless Steel

Frames 1 to 4-gang - Noble - Stainless Steel

Material: anti-fingerprint stainless steel.
Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 AI**	2CLA857100A1401	10
2-gang	**8572 AI**	2CLA857200A1401	10
3-gang	**8573 AI**	2CLA857300A1401	10
4-gang	**8574 AI**	2CLA857400A1401	5

Ash

Frames 1 to 4-gang - Noble - Ash

Material: wood.
Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 FR**	2CLA857100A2001	1
2-gang	**8572 FR**	2CLA857200A2001	1
3-gang	**8573 FR**	2CLA857300A2001	1
4-gang	**8574 FR**	2CLA857400A2001	1

White Glass

Frames 1 to 4-gang - Noble - White Glass

Material: glass.
Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 CB**	2CLA857100A3001	1
2-gang	**8572 CB**	2CLA857200A3001	1
3-gang	**8573 CB**	2CLA857300A3001	1
4-gang	**8574 CB**	2CLA857400A3001	1

Antique Gold

Frames 1 to 4-gang - Noble - Antique Gold

Material: stainless steel.
Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 OE**	2CLA857100A1201	10
2-gang	**8572 OE**	2CLA857200A1201	10
3-gang	**8573 OE**	2CLA857300A1201	10
4-gang	**8574 OE**	2CLA857400A1201	5

Natural Wenge

Frames 1 to 4-gang - Noble - Natural Wengué

Material: wood.
Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 WN**	2CLA857100A2101	1
2-gang	**8572 WN**	2CLA857200A2101	1
3-gang	**8573 WN**	2CLA857300A2101	1
4-gang	**8574 WN**	2CLA857400A2101	1

Black Glass

Frames 1 to 4-gang - Noble - Black Glass

Material: glass.
Size (height x width):
- 1-gang: 86 x 86 mm.
- 2-gang: 86 x 157 mm.
- 3-gang: 86 x 228 mm.
- 4-gang: 86 x 299 mm.

Flush mounting boxes code: 1199, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

Colour	Type	Order code	Pack/Qty.
1-gang	**8571 CN**	2CLA857100A3101	1
2-gang	**8572 CN**	2CLA857200A3101	1
3-gang	**8573 CN**	2CLA857300A3101	1
4-gang	**8574 CN**	2CLA857400A3101	1

Sky Niessen - Installation solutions

Surface mounting boxes

Surface mounting box 1-gang



Size (height x width x depth): 86 x 86 x 43 mm.

Colour	Type	Order code	Pack/Qty.
White	**8591 BL**	2CLA859100A1101	6

Surface mounting box 2-gang

Size (height x width x depth): 86 x 157 x 43 mm.

Colour	Type	Order code	Pack/Qty.
White	**8592 BL**	2CLA859200A1101	5

Surface mounting box 3-gang

Size (height x width x depth): 86 x 228 x 43 mm.

Colour	Type	Order code	Pack/Qty.
White	**8593 BL**	2CLA859300A1101	1

Flush mounting boxes

Flush mounting box - Bricks and cement

Installation box for walls built with bricks or cement.
Distance between screws: 60 mm.
Allows the input of 2 tubes per each side.
Linkable for multigang frames.
Included: 2 screws to fix the mounting plate.
The screws can be placed in any of the 4 sides to facilitate the installation of the insert in vertical and horizontal.

Colour	Type	Order code	Pack/Qty.
	1199	2CLA019900A1001	250

Flush mounting box - Drywall and partitions

Installation box for walls built with drywall or partitions.
Distance between screws: 60 mm.
Suitable for mointing plates code: N2271.9, N2271.9G & N2272.9.
Linkable for multigang frames.
Included: 2 screws to fix the mounting plate.
Shaft diameter: 68 mm.

Colour	Type	Order code	Pack/Qty.
	999	2CLA099909A1001	25

Flush mounting box - Drywall and partitions

Double box suitable for 2-gang mounting plates.
Installation box for walls built with drywall or partitions.
Distance between screws: 60 mm
Suitable for mointing plates code: N2271.9, N2271.9G & N2272.9.
Included: 4 screws to fix the mounting plate.
Shaft diameter: 68 mm.
Distance between centers: 71 mm.

Colour	Type	Order code	Pack/Qty.
	999.2	2CLA099920A1001	10

Impressivo
Zest for life.

Convenient, adaptable and modular. Has got the ability to do whatever you can imagine. A modern design combined with functions which meet all requirements of contemporary living. Impressivo amazes with its flexibility. Flush and surface mounting is possible in common dry and wet environments.

01 white
02 aluminium
03 anthracite
04 black matt

Materials
UV-resistant, free of PVC and halogen.

Impressivo

Selected functions.

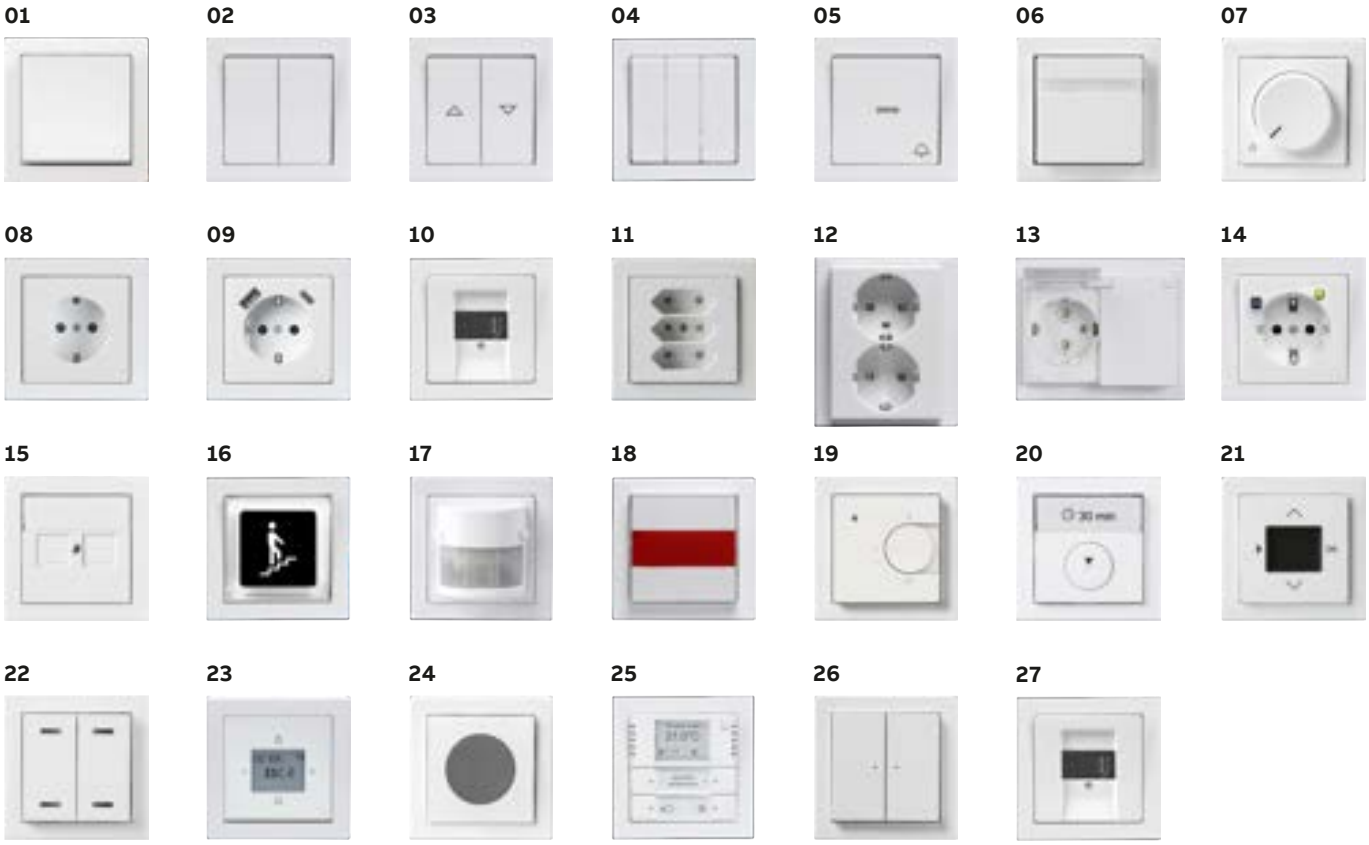

01 Rocker switch 1-gang
02 Rocker switch 2-gang
03 2-gang push switch
04 3-gang 1-way switch
05 Switch rocker 1-gang, “bell” symbol
06 Comfort switch
07 Rotary dimmer
08 SCHUKO® socket outlet
09 SCHUKO USB socket outlet, USB-A + USB-C
10 USB power adapter insert, 2x USB A
11 Euro socket outlet
12 Double SCHUKO® socket outlet
13 2-gang SCHUKO® socket outlet, IP 44
14 Residual current device
15 RJ45 outlet with sliding dust covers
16 IceLight with symbol
17 Movement detector
18 LED signal light
19 Thermostat
20 Timer
21 Timer
22 4/2-gang push button panel
23 Busch-Radio DAB+
24 Loudspeaker for DigitalRadio
25 KNX-thermostat
26 ABB-free@home®, 2-gang switch
27 USB power adapter insert, USB A & C

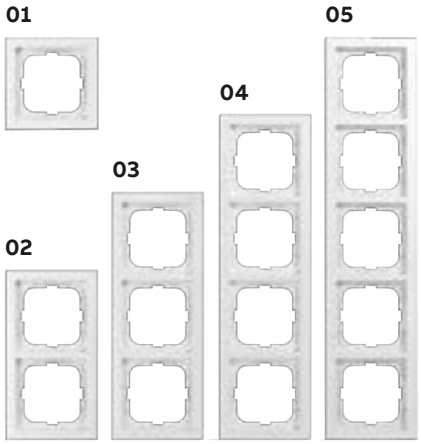

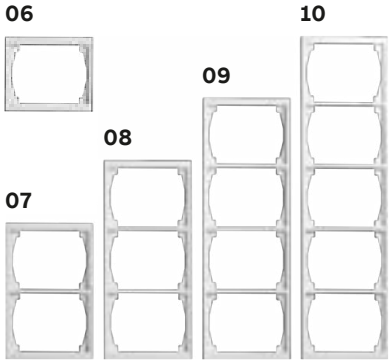

1- to 5-gang cover frame for horizontal and vertical installation
01 85 mm x 85 mm
02 85 mm x 156 mm
03 85 mm x 227 mm
04 85 mm x 298 mm
05 85 mm x 369 mm

1- to 5-gang cover frame for double socket outlets, for horizontal and vertical installation
06 100 mm x 85 mm
07 100 mm x 156 mm
08 100 mm x 227 mm
09 100 mm x 298 mm
10 100 mm x 369 mm

For more information about light switch ranges visit ABB global web sites.

Impressivo

Rocker switches, push switches

Flush mounting 1-gang switches, IP21

Switches with screwless terminals and rocker with clip-on fastening. The terminals are for max 2 rigid wires. Flush mounting on a smooth surface IP21.

Includes switch insert and rocker

Colour	Type	Order code	Pack/Qty.
	1-gang 2-way switch, 16AX/250V, 2 X-terminals		
white	**1066UC-84**	2TKA00000419	1/10
white matt	**1066UC-884**	2TKA00004412	1/10
black matt	**1066UC-885**	2TKA00004297	1/10
	1-gang intermediate switch, 16AX/250V, 2 X-terminals		
white	**1067UC-84**	2TKA00000422	1/10
white matt	**1067UC-884**	2TKA00001721	1/10
black matt	**1067UC-885**	2TKA00004465	1/10
	Modular		
	1-gang 2-way switch insert, 16AX/250V, 2 X-terminals, lamp possibility		
	1066.21	2TKA000175G1	10/100
	1-gang intermediate switch insert, 16AX/250V, 2 X-terminals, lamp possibility		
	1067.21	2TKA000201G1	10/100
	Double pole 1-gang 2-way switch insert, 16AX/250V, no X-terminals, lamp possibility		
	10662.00	2TKA000177G1	10/100
	Switch rocker, 1-gang		
white	**1786-84**	2TKA000543G1	1/10
	Switch rocker, 1-gang		
anthracite	**1786-81**	2TKA000541G1	1/10
	Switch rocker, 1-gang		
aluminium	**1786-83**	2TKA000542G1	1/10
white matt	**1786-884**	2CKA001751A3027	1/10
black matt	**1786-885**	2CKA001751A3041	1/10

Flush mounting 1-gang 1-way push switch, IP21

Push switches with screwless terminals and rocker with clip-on fastening. The terminals are for max 2 rigid wires. Flush mounting on a smooth surface IP21.

Includes switch insert and rocker

Colour	Type	Order code	Pack/Qty.
	1-gang 2-way push switch, 16A/250V, 1N terminal		
white	**1466UC-84**	2TKA00000430	1/10
	Modular		
	1-gang 1-way push switch insert 16A/250V, 2 X-terminals, lamp possibility		
	1461.21	2TKA000227G1	10/100
	Switch rocker, 1-gang		
white	**1786-84**	2TKA000543G1	1/10
	Switch rocker, 1-gang		
anthracite	**1786-81**	2TKA000541G1	1/10
	Switch rocker, 1-gang		
aluminium	**1786-83**	2TKA000542G1	1/10
white matt	**1786-884**	2CKA001751A3027	1/10
black matt	**1786-885**	2CKA001751A3041	1/10
	Switch rocker, 1-gang, "light" symbol, lens		
white	**1789LI-84**	2TKA000569G1	1/10
	Switch rocker, 1-gang, "light" symbol, lens		
anthracite	**1789LI-81**	2TKA000567G1	1/10
	Switch rocker, 1-gang, "light" symbol, lens		
aluminium	**1789LI-83**	2TKA000568G1	1/10

Flush mounting 2-pole switch, IP21

Switches with screwless terminals and rocker with clip-on fastening. The terminals are for max 2 rigid wires. Flush mounting on a smooth surface IP21.

Includes switch insert and rocker

Colour	Type	Order code	Pack/Qty.
	2-pole 1-gang 1-way switch, 16AX/250V, 2 X-terminals		
white	**1062UC-84**	2TKA00000407	1/10
white matt	**1062UC-884**	2TKA00004862	1/10
black matt	**1062UC-885**	2TKA00004298	1/10
	Modular		
	Switch insert, 16AX/250V, 2-pole, 2 X-terminals, lamp possibility		
	1062.21	2TKA000130G1	10/100
	Switch rocker, 1-gang, red lens, "1/0" symbol		
anthracite	**1788-81**	2TKA000549G1	1/10
	Switch rocker, 1-gang, red lens, "1/0" symbol		
aluminium	**1788-83**	2TKA000550G1	1/10
white matt	**1788-884**	2CKA001751A3028	1/10
black matt	**1788-885**	2CKA001751A3042	1/10

Flush mounting 2-gang switches, IP21

Switches with screwless terminals and rocker with clip-on fastening. The terminals are for max 2 rigid wires. Flush mounting on a smooth surface IP21.

Includes switch insert and rocker

Colour	Type	Order code	Pack/Qty.
	2-gang 1-way switch, 16AX/250V, 2 X-terminals		
white	**1065UC-84**	2TKA00000413	1/10
white matt	**1065UC-884**	2TKA00000413	1/10
black matt	**1065UC-885**	2TKA00004299	1/10
	2-gang 2-way switch, 16AX/250V, no X-terminals		
white	**10666UC-84**	2TKA00000416	1/10
white matt	**10666UC-884**	2TKA00004411	1/10
black matt	**10666UC-885**	2TKA00004300	1/10
	Modular		
	2-gang 1-way switch insert, 16AX/250V, 2 X-terminals, no lamp possibility		
	1065.20	2TKA000158G1	10/100
	2-gang 2-way switch insert, 16AX/250V, no X-terminals, no lamp possibility		
	10666.00	2TKA000179G1	10/100
	Switch rocker, 2-gang		
white	**1785-84**	2TKA000523G1	1/10
	Switch rocker, 2-gang		
anthracite	**1785-81**	2TKA000521G1	1/10
	Switch rocker, 2-gang		
aluminium	**1785-83**	2TKA000522G1	1/10
white matt	**1785-884**	2CKA001751A3024	1/10
black matt	**1785-885**	2CKA001751A3038	1/10

Impressivo

Rocker switches, push switches

Flush mounting 2-pole + 1-way switch, IP21

The switch has one 1-way switch and one 2-pole 1 switch together. Switches with screwless terminals and rocker with clip-on fastening. The terminals are for max 2 rigid wires. Flush mounting on a smooth surface IP21. No X-terminals.

Includes switch insert and rocker

Colour	Type	Order code	Pack/Qty.
white	**10621UC-84**	2TKA00000404	1/10
anthracite	**10621UC-81**	2TKA00000402	1/10
aluminium	**10621UC-83**	2TKA00000403	1/10
white matt	**10621UC-884**	2TKA00002741	1/10
black matt	**10621UC-885**	2TKA00004466	1/10

2-gang push switch inserts

2-gang push switches with screwless terminals and rocker with clip-on fastening. The terminals are for max 2 rigid wires. Flush mounting on a smooth surface IP21.

Modular

Colour	Type	Order code	Pack/Qty.
	Push switch insert 10A/250V, for up/down control		
	2020/4U-101	2TKA000640G1	10/100
	Switch rocker, 2-gang, "up/down" symbol		
white	**1785JA-84**	2TKA000532G1	1/10
	Switch rocker, 2-gang, "up/down" symbol		
anthracite	**1785JA-81**	2TKA000530G1	1/10
	Switch rocker, 2-gang, "up/down" symbol		
aluminium	**1785JA-83**	2TKA000531G1	1/10

Flush mounting 3-gang 1-way switch, IP21

Switches with screwless terminals and rocker with clip-on fastening. The terminals are for max 2 rigid wires. Flush mounting on a smooth surface IP21.

Includes switch insert and rocker

Colour	Type	Order code	Pack/Qty.
	3-gang 1-way switch, 16AX/250V, no X-terminals		
white	**10631UC-84**	2TKA00000410	1/10

Modular

	3-gang 1-way switch insert, 16AX/250V, no X-terminals, no lamp possibility		
	10631.00	2TKA000147G1	10/100
	Switch rocker, 3-gang		
anthracite	**1783-81**	2TKA000514G1	1/10
	Switch rocker, 3-gang		
aluminium	**1783-83**	2TKA000515G1	1/10
white matt	**1783-884**	2TKA00004841	1/10

Flush mounting 1-gang 2-way switch, IP44



Product includes switch insert, rocker, cover frame, screw-mounted rocker frame and seal. Screwless terminals are for max 2 rigid wires. Flush mounting on rough surface IP44.
16AX/250V, no X-terminals.

Colour	Type	Order code	Pack/Qty.
white	**1066UW-84**	2TKA000200G1	1/10

Flush mounting 2-gang 1-way switch, IP44



Product includes switch insert, rocker, cover frame, screw-mounted rocker frame and seal. Screwless terminals are for max 2 rigid wires. Flush mounting on rough surface IP44.
16AX/250V, no X-terminals

Colour	Type	Order code	Pack/Qty.
white	**1065UW-84**	2TKA000173G1	1/10

Card switch

Card switch can be used, for example, as a hotel room "main switch". The card switch is operated with a credit card sized card. Delivery includes a 230V lamp.

Colour	Type	Order code	Pack/Qty.
	Card switch insert, 16AX/250V, 2-pole, no X terminals, lamp included		
	8114.1	2TKA003950G1	10/100
	Center plate, for card switch 8114.1		
white	**1792-84**	2TKA000581G1	1/10
	Center plate, for card switch 8114.1		
anthracite	**1792-81**	2TKA000579G1	1/10
	Center plate, for card switch 8114.1		
aluminium	**1792-83**	2TKA000580G1	1/10
white matt	**1792-884**	2CKA001710A3928	1/10
black matt	**1792-885**	2CKA001710A3905	1/10
	Lamp, 230V/1.5mA, fluorescent, for card switch		
	8331	2TKA000042G1	10/100

Push button panel 4/2-gang, 5-24V ac/dc

4/2-gang push button panel to control bistable relays or electronic control systems. Load capacity 1A AC/DC. White LED-light with adjustable illumination. Installation on surface or on top of a standard flush mounting box.

Colour	Type	Order code	Pack/Qty.
white	**FAP1204-84**	2TKA00000915	1/10
anthracite	**FAP1204-81**	2TKA00000913	1/10
aluminium	**FAP1204-83**	2TKA00000914	1/10
black matt	**FAP1204-885**	2TKA00004486	1/10

Impressivo

Rocker switches, push switches

1-gang rockers, IP21/IP44

1-gang rockers for all 1-gang switch inserts. Flush- and surface mounting: Protection class IP21, and IP44 with a seal and screw fastening rocker frame.

Colour	Type	Order code	Pack/Qty.
white	**1786-84**	2TKA000543G1	1/10
anthracite	**1786-81**	2TKA000541G1	1/10
aluminium	**1786-83**	2TKA000542G1	1/10

1-gang rockers with name plate, IP21/IP44

1-gang rockers for all 1-gang switch inserts. Flush- and surface mounting: Protection class IP21, and IP44 with a seal and screw fastening rocker frame. The rockers have a name plate (59,7 mm x 11,7 mm) with a strip for writing. The delivery includes one blank strip and one strip with the text "MASTER".

Colour	Type	Order code	Pack/Qty.
white	**1764NLI-84**	2TKA000492G1	1/10
anthracite	**1764NLI-81**	2TKA000490G1	1/10
aluminium	**1764NLI-83**	2TKA000491G1	1/10

1-gang rockers with red lens, IP21/IP44

1-gang rockers for all 1-gang switch inserts. Flush- and surface mounting: Protection class IP21, and IP44 with a seal and screw fastening rocker frame. The rockers contain a red lens.

Colour	Type	Order code	Pack/Qty.
	Switch rocker, 1-gang, red lens		
white	**1789-84**	2TKA000559G1	1/10
	Switch rocker, 1-gang, red lens		
anthracite	**1789-81**	2TKA000557G1	1/10
	Switch rocker, 1-gang, red lens		
aluminium	**1789-83**	2TKA000558G1	1/10

1-gang rockers with transparent lens and "light" symbol, IP21/IP44

1-gang rockers for all 1-gang switch inserts. Flush- and surface mounting: Protection class IP21, and IP44 with a seal and screw fastening rocker frame. The rocker contains transparent lens and "Light" symbol.

Colour	Type	Order code	Pack/Qty.
white	**1789LI-84**	2TKA000569G1	1/10
anthracite	**1789LI-81**	2TKA000567G1	1/10
aluminium	**1789LI-83**	2TKA000568G1	1/10

1-gang rockers with transparent lens and "key" symbol, IP21/IP44

1-gang rockers for all 1-gang switch inserts. Flush- and surface mounting: Protection class IP21, and IP44 with a seal and screw fastening rocker frame. The rocker contains transparent lens and "key" symbol.

Colour	Type	Order code	Pack/Qty.
white	**1789TR-84**	2TKA000574G1	1/10
anthracite	**1789TR-81**	2TKA000572G1	1/10
aluminium	**1789TR-83**	2TKA000573G1	1/10

1-gang rockers with transparent lens and "bell" symbol, IP21/IP44

1-gang rockers for all 1-gang switch inserts. Flush- and surface mounting: Protection class IP21, and IP44 with a seal and screw fastening rocker frame. The rocker contains transparent lens and "bell" symbol.

Colour	Type	Order code	Pack/Qty.
white	**1789KL-84**	2TKA000564G1	1/10
anthracite	**1789KL-81**	2TKA000562G1	1/10
aluminium	**1789KL-83**	2TKA000563G1	1/10

Seal for switches, IP44

Seal for 85mm cover frame. Switches and push switches are IP21 when installed on a rough surface with a seal. Protection class is IP44 when using screw-mounted rocker frame with a seal.

Colour	Type	Order code	Pack/Qty.
	2463	2TKA000002G1	20/200

Screw-mounted rocker frames, IP44

Screw-mounted rocker frames are used with the seals 2463 or 2464 to reach IP44 protection class on switches and push switches. Furthermore, it can be used to connect the switch frame to the insert for improved security.

Colour	Type	Order code	Pack/Qty.
	Supporting frame for 1/3-gang rocker, screw fastening		
	2474	2TKA000004G1	20/200
	Supporting frame for 2-gang rocker, screw fastening		
	2475	2TKA000005G1	20/200

Impressivo

Rocker switches / push switches

Lamps for switches

Lamps for switches and push buttons. Lamps can be installed in 1-gang switch inserts that include the signal-/search light possibility. Lamps can't be installed in 2- or 3-gang switch inserts.

Colour	Type	Order code	Pack/Qty.
	Lamp, 230V/0.4mA, fluorescent, for 1-gang switches		
	8370	2TKA000045G1	10/100
	Lamp, 230V/2mA, fluorescent, for 1-gang switches		
	8372	2TKA000047G1	10/100
	Lamp, 24V/22mA, incandescent, for 1-gang switches		
	8375	2TKA000048G1	10/100
	Lamp, 12V/40mA, incandescent, for 1-gang switches		
	8376	2TKA000049G1	10/100
	Lamp, 230V/1.5mA, fluorescent, for card switch		
	8331	2TKA000042G1	10/100
	Lamp, 250V/0.4mA, LED, for 1-gang switches		
	8370R	2TKA00003241	10/100
	Lamp, 5-24V/0,5-2,5mA, LED, for 1-gang switches		
	8375R	2TKA00003242	10/100

Friends of Hue smart switch complete set. Wall transmitter, 2/4 channels.

Consitsting of Friends of Hue smart switch insert 6716 U-500. Comprising 2gang rocker 6736 FoH-8xx for Friends of Hue smart switch. Consisting of 1gang future® linear cover frames. Comprising fixing plate and intermediate ring. Smarter light switches for wireless remote control of Philips Hue lamps For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology.
Combinable with the Busch-Jaeger switch ranges: carat®,carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
studio white	**6716 UJ-84-500**	2CKA006710A0011	1
black matt [1])	**6716 UJ-885-500**	2CKA006710A0018	1

[1]) surface painted

Friends of Hue smart switch insert Wall-mounted transmitter, 2 / 4 channel.

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx. Smarter light switches for wireless remote control of Philips Hue lamps. For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology.
Combinable with the Busch-Jaeger switch ranges: carat®,carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
	6716 U-500	2CKA006710A0014	1

Bluetooth Low Energy (BLE) smart switch complete set. Wall transmitter, 2/4 channels.

Consisting of BLE smart switch insert 6716 UBT, 2gang rocker 6736 FoH-8xx for smart switches, 1gang future® linear cover frame, fixing plate and intermediate ring. Smarter light switch for wireless remote control of BLE radio devices. Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.

- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
studio white	**6716/01 UJ-84-500**	2CKA006730A0156	1
black matt [1])	**6716/01 UJ-885-500**	2CKA006730A0157	1

[1]) Surface painted.

Impressivo

Rocker switches / push switches

Bluetooth Low Energy (BLE) smart switch semi complete set. Wall transmitter, 2/4 channels.

Consisting of BLE smart switch insert 6716 UBT, 2gang rocker 6736 FoH-8xx for smart switches, fixing plate and intermediate ring. Smarter light switch for wireless remote control of BLE radio devices. Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, future® linear and Impressivo.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
studio white	**6716/01 UJ-84-510**	2CKA006730A0158	1
black matt [1])	**6716/01 UJ-885-510**	2CKA006730A0159	1

[1]) Surface painted.

Bluetooth Low Energy (BLE) smart switch insert. Wall transmitter, 2 / 4 channel.

For smart switch rockers 6735 BT-8xx and 6736 FoH-8xx.
- Smart switch for wireless remote control of radio components.
- Compatible with Bluetooth ecosystems of following companies: aruba, Casambi, enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, SILVAIR, Blu2Light (Vossloh Schwabe), WISILICIA, XICATO Controls.
- For saving, calling up and dimming individual light scenes.
- Battery-free switch, no connection to mains voltage (230 V~) required.
- Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generated when switching (energy harvesting).
- Maximum functional reliability through Bluetooth mesh technology.
- Depending on the ecosystem, the wireless range is automatically extended via mains-powered BT mesh devices (repeater function).
- Encrypted transmission with AES-128 (CBC mode) and sequence counter.
- Contains NFC configuration interface according to NFC Forum Type 2 Tag (ISO/IEC 14443 Part 2 + 3).
- Therefore particularly simple commissioning of BLE radio components from Casambi.
- Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.
- Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.

Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
BT smart switch insert (SF)	**6716 UBT**	2CKA006710A0015	1

1gang rocker for Friends of Hue and Bluetooth (Casambi)

Smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
white	**6735 BT-84**	2CKA006730A0145	1
black	**6735 BT-885**	2CKA006730A0150	1

2gang rocker for Friends of Hue and Bluetooth (Casambi).

Smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT. Combinable with the Busch-Jaeger switch ranges: carat®, carat® flat, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®, Busch-axcent® pur and future® linear.

Colour	Type	Order code	Pack/Qty.
studio white	**6736 FoH-84**	2CKA006730A0136	1
black matt [1])	**6736 FoH-885**	2CKA006730A0141	1

Flat LED-dimmer, with rotary control

LED dimmer With rotary control. Two-way switch and soft-catch. With N-terminal. 2- or 3-wire connection (neutral conductor not required). Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA). Without claws. Very low installation depth: < 20 mm Without claws. Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi). For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers. For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps. Mix operaton of LEDi with conventional loads possible. With manually adjustable operating mode: trailing / leading edge control. With adjustable minimum/maximum brightness. Low-noise level by MOSFET transistors. With electronic short-circuit protection. With electronic overload protection. With Impressivo cover plate. Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz.
Nominal power (L): 2 - 100 W/VA (leading-edge control).
Nominal power (R, C): 10 - 360 W/VA (trailing-edge control).
Nominal power (LEDi): 2 - 100 W/VA (leading-edge control).
Nominal power (LEDi): 2 - 200 W/VA (trailing-edge control).

Colour	Type	Order code	Pack/Qty.
	Busch-Rotary-Dimmer Electronic Controls		
white	**6523 URCGL-84-104**	2CKA006512A0357	1/10
	Busch-Rotary-Dimmer Flush Mounted Inserts Turn/push button 230 V 2...360 V·A		
	6523 UR-104-500	2CKA006512A0354	1/10
	Dimmer center plate, with neon lamp		
white	**6540-84-102-510**	2CKA006599A3037	1/10
	Dimmer center plate, with neon lamp		
anthracite	**6540-81-102-510**	2CKA006599A3035	1/10
	Dimmer center plate, with neon lamp		
aluminium	**6540-83-102-510**	2CKA006599A3036	1/10
black matt	**6540-885-102-510**	2CKA006599A3044	1/10
white matt	**6540-884-102-510**	2TKA00004921	1/10

Note! There might be limitations from transformer producers on how many dimmable LED bulbs can be connected behind one transformer.

Impressivo

Rocker switches / push switches

Busch-rotary dimmer [1]. Flush-mounted, DALI, with internal power supply, tunable white

For DALI broadcast service (via central telegram). With integrated DALI power adaptor. For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With rotary control and ON/OFF push operation. For changing the colour temperature of "tunable white" lamps, which meet DALI Standard IEC 62386-209 (Device Type 8). Colour temperature can then be set between 2,700 K - 6,500 K. With electronic short-circuit protection. With electronic overload protection. Brightness power-on level and backround brightness level adjustable, buffered. With integrated LED illumination for orientation. Color of orientation light adjustable (18 presets and OFF). Up to 5 potentiometers are connectable in parallel. Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=. Rated current: max. 75 mA. Power consumption: < 2,5 W. Number of DALI-units: 37 in case of one active power-potentiometer in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point. Max. DALI-cable length: 300 m (1,5 - 2,5 mm^2). Without cover plate. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
white	**2116/11UJGL-84**	2CKA006599A3031	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, Part 1, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Sold in parts

DALI dimmer, with internal power supply, tunable white, insert

	2116/11U	2CKA006599A3026	1/10

Colour	Type	Order code	Pack/Qty.
	Dimmer center plate with neon lamp		
white	**6540-84-102-510**	2CKA006599A3037	1/10
	Dimmer center plate, with neon lamp		
anthracite	**6540-81-102-510**	2CKA006599A3035	1/10
	Dimmer center plate, with neon lamp		
aluminium	**6540-83-102-510**	2CKA006599A3036	1/10
black matt	**6540-885-102-510**	2CKA006599A3044	1/10
white matt	**6540-884-102-510**	2TKA00004921	1/10

DALI-potentiometrs

For DALI broadcast service (via central telegram) according standard IEC 62386. For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface. With (2117/11U-500)or without (2117U-500) power supply. No center plate or frame included.

Inserts

Colour	Type	Order code	Pack/Qty.
	DALI potentiometer insert		
	2117U-500	2TKA00001861	1/10
	With integrated power supply		
	2117/11U-500	2TKA00001865	1/10
	Dimmer center plate, with neon lamp		
white	**6540-84-102-510**	2CKA006599A3037	1/10
anthracite	**6540-81-102-510**	2CKA006599A3035	1/10
aluminium	**6540-83-102-510**	2CKA006599A3036	1/10
black matt	**6540-885-102-510**	2CKA006599A3044	1/10
white matt	**6540-884-102-510**	2TKA00004921	1/10

Potentiometer 1-10 V

Potentiometer 1-10 V. For controlling electronic control gears for fluorescent lamps, analogy adjustment (IEC 929). Nominal voltage: 230 V/50 Hz. Control current max. 50 mA DC. Switching capability 4 A cos ϕ 0,9. Up to 4 control gears can be directly connected to 1 dimmer. With larger loads an external relay or contactor must be used.

Includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Potentiometer 1-10 V		
white	**2112UJGL-84-101**	2CKA006599A3029	1/10

Sold in parts

	Potentiometer insert 1-10 V		
	2112 U-101-500	2CKA006599A2873	1/10
	Dimmer center plate, with neon lamp		
white	**6540-84-102-510**	2CKA006599A3037	1/10
	Dimmer center plate, with neon lamp		
anthracite	**6540-81-102-510**	2CKA006599A3035	1/10
	Dimmer center plate, with neon lamp		
aluminium	**6540-83-102-510**	2CKA006599A3036	1/10
black matt	**6540-885-102-510**	2CKA006599A3044	1/10
white matt	**6540-884-102-510**	2TKA00004921	1/10

Impressivo

Rocker switches / push switches

Smart Switch, WL — NEW

Smarter light-/blind switch for wireless control of Busch-flexTronics® wireless and Busch-free@home® devices. Wall-mounted transmitter, 2/4 channels.
Operation in ABB-flexTronics® wireless with up to 32 devices (room control). Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required. Programming with the ABB-free@home® Next App. Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.
Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.

Colour	Type	Order code	Pack/Qty.
	62721 U-WL-500	2CKA006710A0048	1

Rocker 1gang, with "Blind" icon — NEW

As cover for Friends of Hue, Bluetooth (Casambi) and free@home Smart Switches.

Colour	Type	Order code	Pack/Qty.
84 studio white	**6735-11-84**	2CKA006220A0988	1
885 black matt [1])	**6735-11-885**	2CKA006220A0992	1

[1]) Surface painted.

Dimmers

Relay insert flex, 2gang [1])

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Impressivo

Movement detectors

e-contact insert flex, 1gang [1] [2]

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1] Use only dimmable high-voltage LEDs.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6] FM, LED, 3-240 VA

2-wire connection (neutral conductor not required).Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA). Touch dimmer for switching lighting systems. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi). For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers. For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps. Mix operaton of LEDi with conventional loads possible. With manually adjustable operating mode: trailing / leading edge control. With adjustable minimum brightness. With light-level memory and minimum brightness memory. Low-noise level by MOSFET transistors. With electronic short-circuit protection. With electronic overload protection. Without control cover. For control element flex, 1gang, 64711. For control element flex, 2gang, 64721. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Rated power: 3-240 VA (LEDi). Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 1. Outputs: 1x dimming channel. Suitable for: 230 V LEDi, typical (leading edge control). Rated power: 3 - 100 VA. Suitable for: 230 V LEDi, typical (trailing edge control). Rated power: 3 - 240 W. Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer. Rated power: 10 - 240 VA.Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Impressivo

Movement detectors

Extension insert flex [1])

3 wire connection (neutral conductor required). For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Control/Signal outputs: 1, electronic output, potential-bound. Temperature range (Device): -5 °C to 45 °C Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Comfort switch flex sensor

Movement detector push-button switch combination. Movement detector push-button switch combination. For switching lighting systems that depend on brightness and movement. Push switch function possible at all times. Extension of the detection range by means of master/slave combination. Additional activation/deactivation option via push-button input on the flush-mounted insert. Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off. Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off. Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off. With continuous light/continuous Off function. Adjusting elements on rear side. Surveillance density: 9 sectors with 28 switching segments. Switch-off delay: 1 to 10 min., adjustable. Compatible with all free@home flexTronics inserts. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Please order the respective flush-mounted insert separately. The range specifications refer only to an ambient temperature of 21°C.

Colour	Type	Order code	Pack/Qty.
anthracite	**64765-81-500**	2CKA006800A2883	
aluminium silver	**64765-83-500**	2CKA006800A2887	
studio white	**64765-84-500**	2CKA006800A2889	
black matt	**64765-885-500**	2CKA006800A2895	

Flex LED dimmer, complete set, wireless

future® linear LED touch-dimmer insert with tapping control element, 2gang, wireless. Optimised for dimming of retrofit LED lamps (LEDi). Consisting of Flex touch dimmer insert, 64851 U. Consisting of rocker, 2gang left with >Dimmer< icon 6234-21-84. Consisting of future® linear cover frames, 1gang 1721-184K.

Colour	Type	Order code	Pack/Qty.
	62851 UJ-84-WL-500	2CKA006200A0295	

Busch-Watchdog 180 flex, basic sensor

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Compatible with all free@home flexTronics inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 22 mm. Please order the respective flush-mounted insert separately. The range specifications refer only to an ambient temperature of 21°C.

Colour	Type	Order code	Pack/Qty.
anthracite	**64761-81-500**	2CKA006800A2921	
aluminium silver	**64761-83-500**	2CKA006800A2925	
studio white	**64761-84-500**	2CKA006800A2927	
black matt	**64761-885-500**	2CKA006800A2933	

Impressivo

Movement detectors

Busch-Watchdog 180 flex, comfort sensors with multi lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flexTronics inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 22 mm. Please order the respective flush-mounted insert separately. The range specifications refer only to an ambient temperature of 21°C.

Colour	Type	Order code	Pack/Qty.
anthracite	**64762-81-500**	2CKA006800A2958	
aluminium silver	**64762-83-500**	2CKA006800A2962	
studio white	**64762-84-500**	2CKA006800A2964	
black matt	**64762-885-500**	2CKA006800A2970	

ABB flexTronics inserts

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flexTronics inserts. Adjusting elements on rear side. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U. For e-contact insert flex, 1gang, 64814 U. For series relay insert flex, 2gang, 64821 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. Mounting height: 31 mm. Please order the respective flush-mounted insert separately. The range specifications refer only to an ambient temperature of 21°C.

Colour	Type	Order code	Pack/Qty.
anthracite	**64764-81-500**	2CKA006800A2995	
aluminium silver	**64764-83-500**	2CKA006800A2999	
studio white	**64764-84-500**	2CKA006800A3001	
black matt	**64764-885-500**	2CKA006800A3007	

Timers

Countdown timer

User friendly timer with fixed time settings 15min, 30min, 1h, 2h, 4h or 8h. Countdown time is set with a screwdriver. 2-pole switch.

Includes insert and center plate

Colour	Type	Order code	Pack/Qty.
white	**T210-84**	2TKA00000875	1/10
anthracite	**T210-81**	2TKA00000876	1/10
aluminium	**T210-83**	2TKA00000877	1/10
black matt	**T210-885**	2TKA00004108	1/10

Timer switches

Timer switch display, 10 A. Four switching times per day can be user-defined for each day of the week. Automatic summer/wintertime switch-over. 14-hour power reserve. Nominal voltage: 230 V/50 Hz. Operating temperature range: 0 °C - 35 °C. Timer switch insert is connected to universal relay unit 6401U-102. Suitable center plates 6435-8X.

Inserts

Colour	Type	Order code	Pack/Qty.
	Universal relay unit insert, 10 A **6401U-102**	2TKA001428G1	1/10
	Timer switch display	2TKA000025G1	1/10
	Centre plates		
white	**6435-84**	2TKA001434G1	1/10
aluminium	**6435-83**	2TKA001433G1	1/10
anthracite	**6435-81**	2CKA006430A0303	1/10
black matt	**6435-885**	2CKA006430A0389	1/10
white matt	**6435-884**	2CKA006430A0388	1/10

Impressivo
Socket outlets

3-gang Euro socket outlets, flush mounting IP21

Product includes euro socket outlet insert and center plate. The socket outlet insert has shutters and screwless N and L terminals for max 4 wires and 2 screwless X-terminals for max 2 wires. The terminals are for rigid wires. Branching terminals.

Colour	Type	Order code	Pack/Qty.
white	**303UC-84**	2TKA00000433	1/10
anthracite	**303UC-81**	2TKA00000340	1/10
aluminium	**303UC-83**	2TKA00000451	1/10
white matt	**303UC-884**	2TKA00002906	1/10
black matt	**303UC-885**	2TKA00002907	1/10

2-gang Schuko socket outlets, flush mounting, with cover plate, IP21

Product includes Schuko socket outlet insert and cover plate. The socket outlet insert has shutters and screwless terminals for max 4 rigid wires. Branching terminals.

Colour	Type	Order code	Pack/Qty.
white	**302EUJ-84**	2TKA000952G1	1/10
anthracite	**302EUJ-81**	2TKA000951G1	1/10
aluminium	**302EUJ-83**	2TKA00000442	1/10
white matt	**302EUJ-884**	2TKA00002909	1/10
black matt	**302EUJ-885**	2TKA00002910	1/10

2-gang Schuko socket outlets, flush mounting in special 1,5 x box, IP21

Product includes Schuko socket outlet insert and cover plate. There are screwless terminals for each contact of the socket outlet for max 4 rigid wires. No X-terminals. The socket outlet insert has shutters. Flush mounting on a smooth surface IP21. Very flat construction. Installation in special 1,5X mounting box. Branching terminals.

Colour	Type	Order code	Pack/Qty.
white	**302EUJT-84**	2TKA00002007	1/10
anthracite	**302EUJT-81**	2TKA00002005	1/10
aluminium	**302EUJT-83**	2TKA00002006	1/10
black matt	**302EUJT-885**	2TKA00003863	1/10

2-gang Schuko socket outlets, flush mounting, IP21

Product includes Schuko socket outlet insert and center plate. The socket outlet insert has shutters and screwless terminals for max 4 rigid wires. Branching terminals.

Colour	Type	Order code	Pack/Qty.
white	**302EUC-84**	2TKA00000431	1/10
anthracite	**302EUC-81**	2TKA00000440	1/10
aluminium	**302EUC-83**	2TKA00000441	1/10
white matt	**302EUC-884**	2TKA00004809	1/10

2-gang Schuko outlets with special colour, IP21

Product includes Schuko socket outlet insert and center plate. The socket outlet insert has shutters and screwless terminals for max 4 rigid wires. These socket outlets can be used, for instance, in hospitals and offices, when there is a need to limit socket outlet use to certain applications. Flush mounting: On a smooth surface IP21, on a rough surface with a seal IP21. Surface mounting: IP21. Branching terminals.

Colour	Type	Order code	Pack/Qty.
red	**302EUC-02**	2TKA00002962	1/10
orange	**302EUC-03**	2TKA00002963	1/10
green	**302EUC-05**	2TKA00002964	1/10
blue	**302EUC-06**	2TKA00002965	1/10

Flush mounting 2-gang Schuko socket outlets with lid IP21

Product includes Schuko socket outlet insert, center plate with lid. The socket outlet insert has shutters and screwless terminals. The terminals are for max 2 rigid wires. Flush mounting on slide surface IP21 and with seal 2464 on rough surface IP44. The seal 2464 is not included in delivery. Branching terminals.

Colour	Type	Order code	Pack/Qty.
white	**302EUCK-84**	2TKA00003033	1/10
anthracite	**302EUCK-81**	2TKA00003031	1/10
aluminium	**302EUCK-83**	2TKA00003032	1/10
white matt	**302EUCK-884**	2TKA00002356	1/10
black matt	**302EUCK-885**	2TKA00004103	1/10

Non-earthed flush mounting 2-gang socket outlets IP21, with cover plate

Product includes socket outlet insert, center plate and cover frame. The socket outlet insert has shutters and screwless terminals for max 4 rigid wires. Claws can be fitted to socket outlet afterwards. Branching terminals.

Colour	Type	Order code	Pack/Qty.
white	**302UJ-84**	2TKA00000432	1/10
anthracite	**302UJ-81**	2TKA00000339	1/10
aluminium	**302UJ-83**	2TKA00000338	1/10

Flush mounting 1-gang Schuko socket outlets IP21 with cover plate

Product includes Schuko socket outlet insert, center plate and cover frame. The socket outlet has shutters and screwless terminals for max 2 rigid wires.

Colour	Type	Order code	Pack/Qty.
white	**20EUJ-84**	2TKA003848G1	1/10
anthracite	**20EUJ-81**	2TKA00000438	1/10
aluminium	**20EUJ-83**	2TKA00000439	1/10

Impressivo
Socket outlets

1-gang Schuko socket outlets, flush mounting, IP21

Product includes Schuko socket outlet insert and center plate. The socket outlet has shutters and screwless terminals for max 2 rigid wires.

Colour	Type	Order code	Pack/Qty.
white	**20EUC-84**	2TKA003846G1	1/10
anthracite	**20EUC-81**	2TKA00000434	1/10
aluminium	**20EUC-83**	2TKA00000435	1/10

Flush mounting 1-gang Schuko socket outlets with lid IP21

Product includes Schuko socket outlet insert and center plate. The socket outlet has shutters and screwless terminals for max 2 rigid wires.

Colour	Type	Order code	Pack/Qty.
white	**20EUCK-84**	2TKA003847G1	1/10
anthracite	**20EUCK-81**	2TKA00000436	1/10
aluminium	**20EUCK-83**	2TKA00000437	1/10
white matt	**20EUCK-884**	2TKA00002538	1/10

1-gang Schuko socket outlets, flush mounting, with LED light, IP20

Product includes Schuko socket outlet insert and center plate. A white color LED light is integrated into the socket outlet. The light can be controlled seperately or it can be connected to the socket terminals. The socket outlet insert has shutters. There are screwless terminals for max 2 rigid wires for each contact of the socket outlet.

Colour	Type	Order code	Pack/Qty.
white	**20EUCBLI-84**	2TKA00000891	1/10
aluminium	**20EUCBLI-83**	2TKA00000889	1/10

Residual current devices

16A/250V IP21, with built-in A-type residual current device (RCD), tripping current 30mA. Approved for extending a branch circuit, but only regular sockets connected to protected outlet wires are protected. The socket outlet insert has shutters. The products are sold with cover plates. The socket outlet insert has shutters and screwless terminals.

Colour	Type	Order code	Pack/Qty.
white	**3120EUC-84**	2TKA00003318	1/10
white	**3150UC-84.1**	2TKA00003319	1/10
anthracite	**3120EUC-81**	2CCF019499R0001	1/10
anthracite	**3150UC-81.1**	2CCF019500R0001	1/10
black matt	**3120EUC-885**	2CCF019489R0001	1/10
black matt	**3150UC-885.1**	2CCF019490R0001	1/10

2-gang Schuko socket outlet, Flush mounting, IP44

Product includes Schuko socket outlet insert, center plate with lid, cover frame and seal. The socket outlet insert has shutters and screwless terminals. The terminals are for max 2 rigid wires. Flush mounting on rough surface IP44. Branching terminals.

Colour	Type	Order code	Pack/Qty.
white	**302EUJW-84**	2TKA000954G1	1/10
white matt	**302EUJW-884**	2TKA00004811	1/10
black matt	**302EUJW-885**	2TKA00004463	1/10

1-gang Schuko socket outlet, flush mounting, IP44

Product includes Schuko socket outlet insert, center plate with lid, cover frame and seal. The socket outlet insert has shutters and screwless terminals. The terminals are for max 2 rigid wires. Flush mounting on rough surface IP44.

Colour	Type	Order code	Pack/Qty.
white	**20EUJW-84**	2TKA000698G1	1/10
white matt	**20EUJW-884**	2TKA00000073	1/10
black matt	**20EUJW-885**	2TKA00004464	1/10

Seal 85mm for 1-gang socket outlet, IP44

1-gang socket outlets installed with a seal and a center plate with a hinged lid are IP44. Socket outlet without hinged lid on a rough surface is IP21.

Colour	Type	Order code	Pack/Qty.
	2463	2TKA000002G1	20/200

Impressivo

Socket outlets

Seal 100mm for 2-gang socket outlet, IP44

2-gang socket outlets installed with a seal and a center plate with a hinged lid are IP44. Socket outlet without hinged lid on a rough surface is IP21.

Colour	Type	Order code	Pack/Qty.
	2464	2TKA000003G1	20/200

SCHUKO® USB socket outlet, 2gang [1] [2] [3] [4] shuttered

For connecting electric loads.
DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable.
With two USB type A outputs.
Simultaneous charging via USB connection and use of the SCHUKO® socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V~, +10 % / --10 %
Secondary: 5 V-, +5 % / -5 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 2x USB charging interface
Suitable for: SCHUKO® socket outlet
Rated current: 16 A
Suitable for: In case one output is used:
Rated current: 2.4 A
Output voltage: 5 V-
Suitable for: In case two output are used:
Rated current: 1.2 A
Output voltage: 5 V-
Rated power: 12 W
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 58 mm
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
anthracite	**20 EUCB2USB-81-500**	2CKA002011A6268	1/10
ivory white	**20 EUCB2USB-82-500**	2CKA002011A6270	1/10
aluminium silver [5]	**20 EUCB2USB-83-500**	2CKA002011A6272	1/10
studio white	**20 EUCB2USB-84-500**	2CKA002011A6274	1/10
studio white matt [5]	**20 EUCB2USB-884-500**	2CKA002011A6278	1/10
black matt [5]	**20 EUCB2USB-885-500**	2CKA002011A6280	1/10

[1] Increased shock protection .
[2] Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[3] No data transfer.
[4] When cleaning the device, use dust cover 2098 for the USB-A connection.
[5] Surface painted.

Data communication

RJ45 outlet with sliding dust covers for Impressivo

Insert for 2 x RJ45 connectors and center plate with dust covers. The connectors CEL30.UX are not compatible with this device, due to its integrated blind covers.

Modular

Colour	Type	Order code	Pack/Qty.
	Supporting frame insert for 2xRJ45, Keystone		
	1819.01	2TKA000599G1	10/100
	Supporting frame insert for 2xRJ45, AMP		
	1819.02	2TKA000600G1	10/100
	Supporting frame insert for 2xRJ45, Actassi		
	1819.03	2TKA000601G1	10/100
	Supporting frame insert for 2xRJ45, Systimax		
	1819.04	2TKA000602G1	10/100
	Center plate, 2 x RJ45, dust covers		
white	**1819DC-84**	2TKA00001111	1/10
	Center plate, 2 x RJ45, dust covers		
anthracite	**1819DC-81**	2TKA00001109	1/10
	Center plate, 2 x RJ45, dust covers		
aluminium	**1819DC-83**	2TKA00001110	1/10
white matt	**1819DC-884**	2TKA00004842	1/10
black matt	**1819DC-885**	2TKA00004285	1/10

Impressivo

Data communication

RJ45 outlet with sliding dust covers for design-series

Insert for 2 x RJ45 connectors and center plate with dust covers. The connectors CEL30.UX are not compatible with this device, due to its integrated blind covers.

Modular

Colour	Type	Order code	Pack/Qty.
	Supporting frame insert for 2xRJ45, Systimax		
green	**1810.1**	2TKA000595G1	10/100
	Supporting frame insert for 2xRJ45, Keystone		
red	**1812.1**	2TKA000596G1	10/100
	Supporting frame insert for 2xRJ45, AMP		
black	**1814.1**	2TKA000597G1	10/100

RJ45 outlet including connectors

RJ45 outlet including 2 x Cat6 UTP RJ45 connectors manufactured by 3M and blind cover plates. The dust covers are integrated in the connector. Blind covers included.

Colour	Type	Order code	Pack/Qty.
white	**FOT6208-84**	2TKA00000463	1/10
anthracite	**FOT6208-81**	2TKA00000461	1/10
aluminium	**FOT6208-83**	2TKA00000462	1/10

RJ45 connectors

Unshielded (UTP) RJ45 connectors with Keystone fixing and A/B coupling. No special connecting tool is needed. Use with RJ45 insert 1819.01 and center plate 1819-xx. The dust covers are integrated into the connectors. The connector is manufactured by 3M.

Colour	Type	Order code	Pack/Qty.
white	**CEL30.U6**	2TKA001891G1	10/100

DKS insert and center plate

DKS-center plate is used to fix many different kind of tele connectors into the mounting box. To be fitted with a suitable DKS adapter 18XXEB.XXX. The product includes center plate and assembly ring.

Colour	Type	Order code	Pack/Qty.
white	**1758-84**	2TKA000487G1	1/10
anthracite	**1758-81**	2TKA000485G1	1/10
aluminium	**1758-83**	2TKA000486G1	1/10
white matt	**1758-884**	2CKA001724A4307	1/10
black matt	**1758-885**	2CKA001724A4299	1/10

DKS-adapters

Different adapters for DKS-system. Suitable for DKS-center plate 1758-xx.

RJ45

Colour	Type	Order code	Pack/Qty.
	Adapter for DKS-system, 2 x RJ45, Keystone		
	1867EB	2TKA000618G1	10/100
	Adapter for DKS-system, 2 x RJ45, AMP		
	1875EB	2TKA000624G1	10/100
	Adapter for DKS-system, 2 x RJ45, Systimax		
	1872EB	2TKA000622G1	10/100
	Fiber		
	Adapter for DKS-system, fiber 2 x Simplex ST		
	1870EB	2TKA000621G1	10/100
	Adapter for DKS-system, fiber 2 x SCD		
	1874EB	2TKA000623G1	10/100
	Audio		
	Adapter for DKS-system, XLR audio connector type FP		
	1853EB	2TKA000614G1	10/100
	Adapter for DKS-system, XLR audio connector type MP		
	1854EB	2TKA000615G1	10/100
	Adapter for DKS-system, XLR D-type or Speakon audio connector		
	1876EB	2TKA000626G1	10/100
	Others		
	Adapter for DKS-system, D-type 9-pin connector		
	1850EB	2TKA000612G1	10/100
	Adapter for DKS-system, 2 x BNC/TNC, 9,8mm		
	1855EB	2TKA000616G1	10/100
	Adapter for DKS-system, 2 x BNC/TNC, 12,9mm		
	1857EB	2TKA000617G1	10/100
	Adapter for DKS-system, blank		
	1869EB	2TKA000620G1	10/100

DKS-adapter with VGA connector

Suitable for DKS-center plate 1758-xx. VGA connector is included (15pin D-sub). Cable should be connected by soldering.

Colour	Type	Order code	Pack/Qty.
	1850EB.VGA	2TKA000613G1	1/10

DKS-adapter with Composite-/S-video connectors

Suitable for DKS-center plate 1758-xx. Composite (BNC) and S-video (Mini DIN) connectors are included. Composite video connectors internal coaxial cable should be terminated by BNC-type connector. S-video internal cable is standard twisted-pair cable with toolless connection.

Colour	Type	Order code	Pack/Qty.
	1875EB.YCV	2TKA000625G1	1/10

DKS-adapter with Speakon connector

Suitable for DKS-center plate 1758-xx. Speakon 4-pin loudspeaker connector is included. Flat tab terminals.

	1876EB.SPE	2TKA000627G1	1/10

Impressivo

Data communication

Antenna center plate, TV/R/Sat

Center plate for common antenna outlet inserts.
The terminal “Sat” is closed, but can be knocked out.

Colour	Type	Order code	Pack/Qty.
white	**1743-84**	2TKA000465G1	1/10
anthracite	**1743-81**	2TKA000463G1	1/10
aluminium	**1743-83**	2TKA000464G1	1/10
white matt	**1743-884**	2CKA001724A4293	1/10
black matt	**1743-885**	2CKA001724A4298	1/10

USB power adapter insert, flush-mounted [1] [2] [3]
With USB-A & USB-C interface

For supply and support of mobile devices via USB-cable.
With USB type A and USB type C female connector.
To support two devices at the same time. Supports automatic negotiating of optimum charging parameters for the shortest charging times. Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A. Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0.
With electronic short-circuit protection. With electronic overload protection. Rated voltage: 220 - 230 V AC
Rated frequency: 50 Hz - 60 Hz. Outputs: 2x USB charging interface. Suitable for: Only USB-A bus occupied: Rated current: 3000 mA
Output voltage: 5 V-. Suitable for: Only USB-C bus occupied: Rated power: 18 W. Suitable for: USB-A and USB-C bus occupied. Total: Rated current: 3250 mA
Output voltage: 5 V-
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.
[3] When cleaning the device, use dust cover 2098 for the USB-A connection.

Tele outlet USB

Tele outlet with USB A-type connector. Compatible up to USB 2.0 versions. Internal connections with screw type terminals.

Insert *

Colour	Type	Order code	Pack/Qty.
	Tele outlet insert, with USB A-type connector		
	0261/13	2TKA00001916	1
	Center plate, tele outlet		
white	**1766-84**	2TKA000498G1	1/10
anthracite	**1766-81**	2TKA000495G1	1/10
aluminium	**1766-83**	2TKA000496G1	1/10
white matt	**1766-884**	2CKA001710A3926	1/10
black matt	**1766-885**	2CKA001710A3903	1/10

* Delivery time 3 weeks.

Tele outlet VGA

Tele outlet for VGA display with D-sub 15pin connector. Internal connections with screw type terminals.

Insert *

Colour	Type	Order code	Pack/Qty.
	Tele outlet insert, with VGA 15pin D-sub connector		
	0261/23	2TKA00001917	1
	Center plate, tele outlet		
white	**1766-84**	2TKA000498G1	1/10
anthracite	**1766-81**	2TKA000495G1	1/10
aluminium	**1766-83**	2TKA000496G1	1/10
white matt	**1766-884**	2CKA001710A3926	1/10
black matt	**1766-885**	2CKA001710A3903	1/10

* Delivery time 3 weeks.

Tele outlet HDMI

Tele outlet for HDMI display with A-type connector. Internal connections with screw type terminals.

Insert *

Colour	Type	Order code	Pack/Qty.
	Tele outlet insert, with HDMI A-type connector		
	0261/33	2TKA00001918	1
	Center plate, tele outlet		
white	**1766-84**	2TKA000498G1	1/10
anthracite	**1766-81**	2TKA000495G1	1/10
aluminium	**1766-83**	2TKA000496G1	1/10
white matt	**1766-884**	2CKA001710A3926	1/10
black matt	**1766-885**	2CKA001710A3903	1/10

* Delivery time 3 weeks.

Tele outlet BNC-F

Tele outlet for 1 or 2 BNC-F type connectors. Mounting hole for a connector is 12mm. The insert and the connectors are sold separately.

Insert and connector *

Colour	Type	Order code	Pack/Qty.
	Tele outlet insert for 2 x BNC-F type connectors		
	0262/13	2TKA00001919	1
	Connector, BNC-F type, d = 12mm		
	0262	2TKA00001920	1
	Center plate, tele outlet		
white	**1766-84**	2TKA000498G1	1/10
anthracite	**1766-81**	2TKA000495G1	1/10
aluminium	**1766-83**	2TKA000496G1	1/10
white matt	**1766-884**	2CKA001710A3926	1/10
black matt	**1766-885**	2CKA001710A3903	1/10

* Delivery time 3 weeks.

Impressivo

Data communication

Tele outlet RCA

Tele outlet for 1 or 2 RCA audio/video connectors. The insert and the connectors are sold separately.

Insert and connector *

Colour	Type	Order code	Pack/Qty.
	Tele outlet insert for 2 x RCA connectors		
	0263/13	2TKA00001921	1
	Connector, RCA		
white	**0263/04**	2TKA00001922	1
	Connector, RCA		
black	**0263/05**	2TKA00001923	1
	Connector, RCA		
red	**0263/06**	2TKA00001924	1
	Connector, RCA		
yellow	**0263/07**	2TKA00001925	1

Center plate, tele outlet

white	**1766-84**	2TKA000498G1	1/10
anthracite	**1766-81**	2TKA000495G1	1/10
aluminium	**1766-83**	2TKA000496G1	1/10
white matt	**1766-884**	2CKA001710A3926	1/10
black matt	**1766-885**	2CKA001710A3903	1/10

* Delivery time 3 weeks.

Tele outlet for Mini Jack

Tele outlet for 1 or 2 Mini Jack connectors. The insert and the connectors are sold separately.

Insert and connector *

Colour	Type	Order code	Pack/Qty.
	Tele outlet insert for 2 x Mini Jack connectors		
	0264/13	2TKA00001926	1
	Connector, Mini Jack 3,5mm, stereo		
	0264	2TKA00001927	1

Center plate, tele outlet

white	**1766-84**	2TKA000498G1	1/10
anthracite	**1766-81**	2TKA000495G1	1/10
aluminium	**1766-83**	2TKA000496G1	1/10
white matt	**1766-884**	2CKA001710A3926	1/10
black matt	**1766-885**	2CKA001710A3903	1/10

* Delivery time 3 weeks.

Speaker outlet, stereo

There are plug in connectors for speaker wires and screw terminals for max 10mm² internal wires.

Modular

Colour	Type	Order code	Pack/Qty.
	Tele outlet insert, speaker, stereo		
	0248.00	2TKA000090G1	1/10
	Center plate, tele outlet		
white	**1766-84**	2TKA000498G1	1/10
	Center plate, tele outlet		
anthracite	**1766-81**	2TKA000495G1	1/10
	Center plate, tele outlet		
aluminium	**1766-83**	2TKA000496G1	1/10
white matt	**1766-884**	2CKA001710A3926	1/10
black matt	**1766-885**	2CKA001710A3903	1/10

Speaker outlet, mono

There is one red and one black gold plated terminal screw for the speaker wires and screw terminals for max 10mm² internal wires.

Modular

Colour	Type	Order code	Pack/Qty.
	Speaker insert, with terminal screws		
	1819.LSP	2TKA000603G1	1/10
	Center plate, 2 x RJ45, blind covers		
white	**1819-84**	2TKA000609G1	1/10
	Center plate, 2 x RJ45, blind covers		
anthracite	**1819-81**	2TKA000605G1	1/10
	Center plate, 2 x RJ45, blind covers		
aluminium	**1819-83**	2TKA000607G1	1/10

Center plates for Ø 22.5mm devices

Center plates with Ø 22.5mm openings, equipped with a groove to prevent rotation. Use with 22mm dieameter to fasten different devices.

Colour	Type	Order code	Pack/Qty.
white	**2533-84**	2TKA000841G1	1/10
anthracite	**2533-81**	2TKA000839G1	1/10
aluminium	**2533-83**	2TKA000840G1	1/10
white matt	**2533-884**	2CKA001724A4296	1/10
black matt	**2533-885**	2CKA001724A4301	1/10

Equipotential outlet

2-gang equipotential outlet. Screw terminals for 1 x 6mm² and 4 x 2,5mm² wires. The product includes insert and center plate.

Colour	Type	Order code	Pack/Qty.
white	**2095UC-84**	2TKA000652G1	10/100
anthracite	**2095UC-81**	2TKA000650G1	10/100
aluminium	**2095UC-83**	2TKA000651G1	10/100

Equipotential plug

Suitable for potential equalization and to be used with equipotential outlets. For max. 6 mm² wires. The wire is connected by pressing with tool or by soldering.

Colour	Type	Order code	Pack/Qty.
	0299.00032	2TKA000091G1	10/100

Impressivo
Multimedia

DigitalRadio set

2-gang combination digital radio and loudspeaker (flush mounted). The radio offers a stereo RDS tuner with 8 memory presets as well as programmable clock, alarm and snooze functions which are controlled with the switch rocker.

Colour	Type	Order code	Pack/Qty.
white	**8220 UJ-84-101-500**	2CKA008200A0234	1/10

DigitalRadio

The radio offers a stereo RDS tuner with 8 memory presets as well as programmable clock, alarm and snooze functions. Output max. 2x2W. Frequency response: 100-10 000 Hz. Reception frequency 87,50-108,0 Mhz. IP20.

Insert

Colour	Type	Order code	Pack/Qty.
	Digital Radio Insert, FM		
	8215U	2TKA001586G1	1/10
	Busch-Radio BTconnect, DAB+		
	8217 U-101-500	2CKA008200A0279	–
	Center plate		
	8252-81-101-500	2CKA008200A0249	–
	8252-83-101-500	2CKA008200A0253	–
	8252-84-101-500	2CKA008200A0255	–
	8252-885-101-500	2CKA008200A0261	–

Loudspeaker

With flat plug connector. With broadband characteristics. Rated output: 2 W (RMS) Incl. speaker connection cable. Frequency response: 200 - 20,000 Hz Impedance: 4 Ohm. No claw. Screw-fixing via keyholes.

Insert

Colour	Type	Order code	Pack/Qty.
	Loudspeaker insert		
	8223 U-500	2CKA008200A0183	1/10
	Center plate		
white	**8253-84**	2TKA001597G1	1/10
anthracite	**8253-81**	2TKA001595G1	1/10
aluminium	**8253-83**	2TKA001596G1	1/10

Impressivo

Thermostats

Combination thermostat with BT

Bluetooth thermostat with floor sensor for room specific temperature adjustment. 230V / 50Hz / 16A / IP21. The thermostat can work in floor mode, room mode, combination mode or power controlling mode. Can be used together with ABBEcoHeat mobile app. Adjustment range +5 ... 35 °C.

Includes insert and center plate

Colour	Type	Order code	Pack/Qty.
white	**TB16-23-84**	2TKA00005260	1/10
white matt	**TB16-23-884**	2TKA00005261	1/10
black matt	**TB16-23-885**	2TKA00005262	1/10

Thermostat with low insert (20 mm mounting depth) meeting the Ecodesign requirements. The thermostat is pre-programmed. Rated voltage 230 V AC ± 10% 50 Hz
Output 1 no and connectors 1.5 mm² to 4 mm²
Switching current 250 V AC / 16 (2) A, protection class II and protection class IP21.
Operating temperature 0 ° C to 35 ° C and storage temperature -20 ° C to 70 ° C
Clock Accuracy (at 20 ° C) <+/- 0.5 sec / min
Power consumption (standby) <0.05 W
Floor sensor NTC 10kΩ @ 25˚C and external control (EXT connector) 230V AC / 10µA (same phase).

Colour	Type	Order code	Pack/Qty.
white	**TC16-20-84**	2TKA00004035	1/10
	TC16-20U	2TKA00004033	1/10
white	**6435-84**	2CKA006430A0306	1/10
aluminium	**6435-83**	2CKA006430A0305	1/10
black matt	**6435-885**	2CKA006430A0389	1/10

Signal

Transformer

Small size transformer to be installed in normal mounting box. Short circuit protected.
Voltage: 230 V ac / 15 V ac.
Power / loading capacity: 2,2 VA / 150 mA.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Transformer **FLM1000**	2TKA002168G1	1/10
	Impressivo, center plate		
white	Center plate, blind **U-84**	2TKA003414G1	1/10
anthracite	Center plate, blind **U-81**	2TKA003412G1	1/10
aluminium	Center plate, blind **U-83**	2TKA003413G1	1/10
black matt	**U-885**	2TKA00004109	1/10

Control Units, 1- and 2-loop

Available as 1- or 2-loop. Each loop has a LED and a cancelling/disconnecting button. The LED flashes during alarm. When cancelled/disconnected the LED lits constantly. Possibility to connect closing and opening potential free contacts. Loop controls itself against short circuits and breaks. Function selectors "M" memory ON/OFF and "T" delay 150ms/2,5 sec. Potential free output. Good marking possibilities. Operating voltage: 15 - 28 V ac / 18 - 35 V dc.
Current consumption, FEH1001 and FEH1101:
70 mA ac / 40 mA dc, FEH 1002: 110 mA ac / 60 mA dc.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Control Unit, 1-loop **FEH1001**	2TKA002107G1	1/10
	Control Unit, 2-loop **FEH1002**	2TKA002110G1	1/10
	Impressivo, center plate		
white	Center plate, 1-fold **1P-84**	2TKA000632G1	1/10
anthracite	Center plate, 1-fold **1P-81**	2TKA000630G1	1/10
aluminium	Center plate, 1-fold **1P-83**	2TKA000631G1	1/10
white	Center plate, 2-fold **2P-84**	2TKA000893G1	1/10
black matt	**1P-885**	2TKA00004110	1/10
anthracite	Center plate, 2-fold **2P-81**	2TKA000891G1	1/10
aluminium	Center plate, 2-fold **2P-83**	2TKA000892G1	1/10
black matt	**2P-885**	2TKA00004111	1/10

IMPRESSIVO CENTER PLATES FOR JUSSI SIGNALLING PRODUCTS.
INCLUDES THE NEEDED PARTS TO MODIFY THE JUSSI SIGNALLING PRODUCT TO IMPRESSIVO.

Impressivo
Signal

Alarm Unit, 1-loop

Operates as FEH1001, but has a bigger signal light, which flashes during alarm. When cancelled, it lits constantly. Cancelling/disconnection has its own input. When a push button/switch is connected to this terminal, the device could be cancelled/disconnected from a distance or from several points. Possibility to connect closing and opening potential free contacts. Loop controls itself against short circuits and breaks. Function selector "M" memory ON/OFF. Potential free output. Operating voltage: 15 - 28 V ac / 18 - 35 V dc. Current consumption 110 mA ac / 60 mA dc. Sound intensity/frequency: 78 dB / 2,3 kHz / 30cm.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Alarm Unit, 1-loop		
	FEH2001	2TKA002112G1	1/10
	Impressivo, center plate		
	Center plate, Signal light		
white	**V-84**	2TKA003461G1	1/10
	Center plate, Signal light		
anthracite	**V-81**	2TKA003459G1	1/10
	Center plate, Signal light		
aluminium	**V-83**	2TKA003460G1	1/10
black matt	**V-885**	2TKA00004112	1/10

Signal Push Button

Signal Push Button with LED. Adressed / non-adressed function. Good marking possibilities. Operating voltage 9,5 - 28 V ac / 9,5 - 35 V dc. Current consumption: 20 mA ac / 10 mA dc. Switching voltage / -current / -power: 30 V ac / 35 V dc / 100 mA ac/dc / 3 VA/W.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Signal Push Button, 1-fold		
	FAP2001	2TKA002095G1	1/10
	Impressivo, center plate		
	Center plate, 1-fold		
white	**1P-84**	2TKA000632G1	1/10
	Center plate, 1-fold		
anthracite	**1P-81**	2TKA000630G1	1/10
	Center plate, 1-fold		
aluminium	**1P-83**	2TKA000631G1	1/10
black matt	**1P-885**	2TKA00004110	1/10

Signal Push Button with Cord

Signal Push Button with Cord corresponds technically to the Signal Push Button FAP2001. Length of the white Cord is 2,5 meters and the red Cord in 8 meters.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Signal Push Button with Cord		
	FAP3002	2TKA002098G1	1/10
	FAP3002.PU	2TKA00003391	1/10
	Impressivo, center plate		
	Center plate, 2-fold		
white	**2P-84**	2TKA000893G1	1/10
	Center plate, 2-fold		
anthracite	**2P-81**	2TKA000891G1	1/10
	Center plate, 2-fold		
aluminium	**2P-83**	2TKA000892G1	1/10

Signal Push Button with Stereo Plug Terminal

Signal Push Button with LED. Additional plug for 6.3 mm Jack connector (FAP9001). Adressed / non-adressed function. Good marking possibilities. Operating voltage: 9,5-28 Vac / 9,5-35 Vdc. Current consumption: 20 mA ac / 10 mA dc. Switching voltage / -current / -power: 30 Vac/35 Vdc / 100 mA ac/dc / 3 VA/W.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Signal Push Button with Stereo Plug Terminal		
	FAP3011	2TKA002103G1	1/10
	Impressivo, center plate		
	Center plate, Push button/telecom socket outlet		
white	**PT-84**	2TKA003208G1	1/10
	Center plate, Push button/telecom socket outlet		
anthracite	**PT-81**	2TKA003206G1	1/10
	Center plate, Push button/telecom socket outlet		
aluminium	**PT-83**	2TKA003207G1	1/10

Wire Push Button

Push Button with 6.3 mm Jack plug (stereo). Closing contact. Lenght 2m.

Colour	Type	Order code	Pack/Qty.
	Wire Push Button with 6,3mm Jack Plug		
	FAP9001	2TKA002105G1	1/10

Impressivo
Signal

Button / Buzzer

A device including a push button as well as a buzzer. The LED of the push button and the buzzer operates in parallel. The buzzer can be cancelled with the push button. In alarm position the LED flickers. When cancelled it lits constantly till the alarm goes off. Good marking possibilities on the push button and the name plate. Operating voltage 9,5 - 28 Vac / 9,5 - 35 Vdc. Current consumption: 45 mA ac / 35 mA dc. Load capacity of the switch: 42 Vac / 60 Vdc, 250 mA ac/dc, 6 VA / 4 W.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Button / Buzzer		
	FIP1011	2TKA002144G1	1/10
	Impressivo, center plate		
	Center plate, 1-fold		
white	**1P-84**	2TKA000632G1	1/10
	Center plate, 1-fold		
anthracite	**1P-81**	2TKA000630G1	1/10
	Center plate, 1-fold		
aluminium	**1P-83**	2TKA000631G1	1/10
black matt	**1P-885**	2TKA00004110	1/10

Signal Lights

Device with LED signal light. Opal lense. Operating voltage of LED's: 9,5 - 28 V ac / 9,5 - 35 V dc. Current consumption: 60 mA ac / 30 mA dc.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Signal Light		
red	**FIM1000**	2TKA002120G1	1/10
	Signal Light		
yellow	**FIM1010**	2TKA002123G1	1/10
	Signal Light		
green	**FIM1020**	2TKA002125G1	1/10
	Signal Light		
white	**FIM1030**	2TKA002127G1	1/10
	Impressivo, center plate		
	Center plate, Signal light		
white	**V-84**	2TKA003461G1	1/10
	Center plate, Signal light		
anthracite	**V-81**	2TKA003459G1	1/10
	Center plate, Signal light		
aluminium	**V-83**	2TKA003460G1	1/10
black matt	**V-885**	2TKA00004112	1/10

Buzzer

Two audio frequencies available. Volume adjustment possible. Operating voltage: 9,5 - 28 V ac / 9,5 - 35 V dc. Current consumption: 40 mA ac / 20 mA dc. Sound intensity / frequency: 70 dB / 250 Hz or 70 dB / 750 Hz (intensity measured at 30 cm distance). Full sound intensity when operating voltage at least 15V ac or 18V dc.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Buzzer		
	FIM1100	2TKA002128G1	1/10
	Impressivo, center plate		
	Center plate, blind		
white	**U-84**	2TKA003414G1	1/10
	Center plate, blind		
anthracite	**U-81**	2TKA003412G1	1/10
	Center plate, blind		
aluminium	**U-83**	2TKA003413G1	1/10
black matt	**U-885**	2TKA00004109	1/10

Alarm Unit

Alarm Unit with flashing LED light and interrupting sound. Operating voltage: 9,5 - 28 V ac / 9,5 - 35 V dc. current consumption: 60 mA ac / 30 mA dc. Sound intensity / frequency: 78 dB / 2,3 kHz (intensity measured at 30 cm distance). Sound disconnectable.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Alarm Unit		
yellow	**FIM1210**	2TKA002135G1	1/10
	Alarm Unit		
red	**FIM1200**	2TKA002131G1	1/10
	Impressivo, center plate		
	Center plate, Signal light		
white	**V-84**	2TKA003461G1	1/10
	Center plate, Signal light		
anthracite	**V-81**	2TKA003459G1	1/10
	Center plate, Signal light		
aluminium	**V-83**	2TKA003460G1	1/10
black matt	**V-885**	2TKA00004112	1/10

Impressivo

Signal

Signalling Devices

Signal Panel

Could be used as an 3/6 points alarm receiving panel in calling and alarm systems. With 6 red LED's.
Good marking possibilities.
Operating voltage: 12 - 24 V ac/dc.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Signal Panel **FIM1300**	2TKA002136G1	1/10
	Impressivo, center plate		
white	Center plate, signal panel **6V-84**	2TKA001578G1	1/10
anthracite	Center plate, signal panel **6V-81**	2TKA001576G1	1/10
aluminium	Center plate, signal panel **6V-83**	2TKA001577G1	1/10

Disabled WC set, Impressivo

Impressivo disabled WC SET contains the following signalling products: 1 pc Transformer, 1 pc 1-loop Alarm Unit, 1 pc Signal Push Button with Draw Cord (calling) and 1 pc Signal Push Button (cancelling). All devices are equipped with Impressivo coverframes.

Colour	Type	Order code	Pack/Qty.
	Impressivo Disabled WC, set **FJW1004-84**	2TKA00001119	1/10

Jussi Leak Guard

The Leak Guard unit operates as the standard Control Unit FEH1001, with the exception that the loop monitors leakage current (10 µA). Tape sensors, conduit pairs or other leakage sensors could be connected to the device. Memory/no memory function. Potential free output. Cancelling button with LED.
Operating voltage: 9,5 - 28 V ac / 9,5 - 35 V dc.
Current consumption: 75 mA ac / 40 mA dc. Good marking possibilities on the button and name plate.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Leak Guard **FEH2100**	2TKA002115G1	1/10
	Impressivo, center plate		
white	Center plate, 1-fold **1P-84**	2TKA000632G1	1/10
anthracite	Center plate, 1-fold **1P-81**	2TKA000630G1	1/10
aluminium	Center plate, 1-fold **1P-83**	2TKA000631G1	1/10
black matt	**1P-885**	2TKA00004110	1/10

Mains Relay

With mains relay Jussi leak guard can control 230 V ac magnetic valves.. Controlled by low voltage potential free contact (e.g. switches, push buttons, potential free contacts or alarm panels). Separate transformer not needed. Loading capacity: 10 A / 230 V ac. Fluorescent light load max 300 VA.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Mains Relay **FIR1000**	2TKA002152G1	1/10
	Impressivo, center plate		
white	Center plate, blind **U-84**	2TKA003414G1	1/10
anthracite	Center plate, blind **U-81**	2TKA003412G1	1/10
aluminium	Center plate, blind **U-83**	2TKA003413G1	1/10
black matt	**U-885**	2TKA00004109	1/10

Impressivo
Signalling Devices

Tape Sensors

Self adhesive Leak Guard sensor. Wires connected to sensor by soldering.

Colour	Type	Order code	Pack/Qty.
	Tape Sensor, lenght 2 m		
	FLA2100.02	2TKA002164G1	1/10
	Tape sensor, lenght 50 m		
	FLA2100.50	2TKA002166G1	1

Impressivo, Door Panel

The Door Panel can be installed either surface or flush-mounted on top of a 1- or 2-gang mounting box. Compatible with Table Panel FIP2000-8x. Operating voltage: 15 - 28 V ac. Current consumption: 75 mA (max).

Colour	Type	Order code	Pack/Qty.
	Door Panel for office signal system		
white	**FIO2000-84**	2TKA002142G1	1/10

Impressivo Table Panel

The Table Panel can be used for controlling the signal lights of Door Panel FIO2000-xx. It also includes a freely adaptable Push Button and Switch, which can be integrated into an existing emergency or assistant call system using the Adapter Relay FIR2000. 2 meters connecting wire. Operating voltage: 15 - 28 V ac.

Colour	Type	Order code	Pack/Qty.
	Table Panel for office signal system		
white	**FIP2000-84**	2TKA002148G1	1/10

Table Panel Terminal

Table Panel is connected to a RJ12 terminal. The yellow light could be controlled automatically. FOR2000 could be used in both analog and digital telephone systems. FOT2000 is used in digital telephone systems or when the automatic control of the yellow light is not used.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Table Panel Terminal		
	FOT2000	2TKA002177G1	1/10

Impressivo, center plate

	Center plate, 2 x RJ45, dust covers		
white	**1819DC-84**	2TKA00001111	1/10

Adapter Relay

The Adapter Relay is used to integrate the Office Signal System with calling- or alarm systems. Operating voltage 15 - 28 V ac.

Jussi, includes insert and center plate

Colour	Type	Order code	Pack/Qty.
	Adapter Relay		
	FIR2000	2TKA002155G1	1/10

Impressivo, center plate

	Center plate, blind		
white	**U-84**	2TKA003414G1	1/10
	Center plate, blind		
anthracite	**U-81**	2TKA003412G1	1/10
	Center plate, blind		
aluminium	**U-83**	2TKA003413G1	1/10
black matt	**U-885**	2TKA00004109	1/10

Signal light inserts

LED signal light inserts for 230V supply. Center plates V-81, V-83 and V-84 fit to the inserts. There are screw terminals for max 2,5mm² wires. Not extendable.

Modular

Colour	Type	Order code	Pack/Qty.
	Signal light insert, Led 230V/25mA		
white	**2661.09**	2TKA000875G1	1/10
	Signal light insert, Led 230V/25mA		
red	**2661.02**	2TKA000874G1	1/10
	Center plate, Signal light		
white	**V-84**	2TKA003461G1	1/10
	Center plate, Signal light		
anthracite	**V-81**	2TKA003459G1	1/10
	Center plate, Signal light		
aluminium	**V-83**	2TKA003460G1	1/10
black matt	**V-885**	2TKA00004112	1/10

Claws

Claws for 1-gang socket outlets, Euro socket outlets, switches and push switches. Not suitable for 2-gang Impressivo socket outlet inserts. Inserts with claws are also available.

Colour	Type	Order code	Pack/Qty.
	Claws for socket outlets and swithces		
	ASE1	2TKA001721G1	10/100

IMPRESSIVO CENTER PLATES FOR JUSSI SIGNALLING PRODUCTS.
INCLUDES THE NEEDED PARTS TO MODIFY THE JUSSI SIGNALLING PRODUCT TO IMPRESSIVO.

Impressivo
Signalling Devices

Screw-mounted rocker frames, IP44

Screw-mounted rocker frame is used with the seals 2463 or 2464 to reach IP44 protection class on switches and push switches. Furthermore, it can be used to connect the switch frame to the insert with screws for improved security.

Modular

Colour	Type	Order code	Pack/Qty.
	Supporting frame for 1/3-gang rocker, screw fastening		
	2474	2TKA000004G1	20/200
	Supporting frame for 2-gang rocker, screw fastening		
	2475	2TKA000005G1	20/200

Seal 85mm for 1-gang socket outlet, IP44

1-gang socket outlet inserts installed with the seal and a center plate with hinged lid are IP44. Switches and push buttons installed with the seal and with the screwmounted rocker frames are IP44.

Colour	Type	Order code	Pack/Qty.
	2463	2TKA000002G1	20/200

Seal 100mm for 2-gang socket outlet, IP44

2-gang socket outlet inserts installed with the seal and a center plate with hinged lids are IP44. Switches, push buttons and 1-gang socket outlets with a hinged lid are also IP44, when using the seal with adaptor 2519-xx. Screw mounted rocker frame must be used to reach IP44 protection class.

Colour	Type	Order code	Pack/Qty.
	2464	2TKA000003G1	20/200

Blind center plate, 85mm

85mm blind center plate can be used to cover an empty box. It can be used together with 85mm flush- and surface mounting frames. Flush mounting: On a smooth surface IP21, on a rough surface IP20 (seal can't be used). When installed on surface with 2456.26 and 172xS85-xx, protection class is IP44.

Colour	Type	Order code	Pack/Qty.
white	**2538-84**	2TKA000856G1	1/10
anthracite	**2538-81**	2TKA000852G1	1/10
aluminium	**2538-83**	2TKA000854G1	1/10

Blind center plate, 100mm

100mm blind center plate can be used to cover an empty box. Can be used together with 100mm flush- and surface mounting frames. Flush mounting: On a smooth surface IP21, on a rough surface IP20 (seal can't be used). When istalled on surface the protection class is IP44 if wires are installed downwards.

Colour	Type	Order code	Pack/Qty.
white	**2538-100-84**	2TKA000848G1	1/10
anthracite	**2538-100-81**	2TKA000846G1	1/10
aluminium	**2538-100-83**	2TKA000847G1	1/10
white matt	**2538-100-884**	2TKA00004840	1/10
black matt	**2538-100-885**	2TKA00004106	1/10

IMPRESSIVO CENTER PLATES FOR JUSSI SIGNALLING PRODUCTS.
INCLUDES THE NEEDED PARTS TO MODIFY THE JUSSI SIGNALLING PRODUCT TO IMPRESSIVO.

Impressivo

Frames

Flush mounting cover frames 85mm, IP21/IP44 1-gang

Flush mounting cover frames for 1-gang devices. Suitable for both horizontal and vertical installation. Standard installation is IP21 on smooth surface. When using seal 2463 installation is IP21 on rough surface. Final IP class of installation is defined by the used center plate (IP21/IP44).

Colour	Type	Order code	Pack/Qty.
white	**1721F85-84**	2TKA000287G1	1/10
anthracite	**1721F85-81**	2TKA000283G1	1/10
aluminium	**1721F85-83**	2TKA000285G1	1/10
white matt	**1721F85-884**	2TKA00004802	1/10
black matt	**1721F85-885**	2TKA00004071	1/10

Flush mounting cover frames 85mm, IP21/IP44 2-gang

Colour	Type	Order code	Pack/Qty.
white	**1722F85-84**	2TKA000337G1	1/5
anthracite	**1722F85-81**	2TKA000333G1	1/5
aluminium	**1722F85-83**	2TKA000335G1	1/5
white matt	**1722F85-884**	2TKA00004807	1/5
black matt	**1722F85-885**	2TKA00004072	1/5

Prod Flush mounting cover frames 85mm, IP21/IP44 3-gang uct

Colour	Type	Order code	Pack/Qty.
white	**1723F85-84**	2TKA000376G1	1/5
anthracite	**1723F85-81**	2TKA000372G1	1/5
aluminium	**1723F85-83**	2TKA000374G1	1/5
white matt	**1722F85-884**	2TKA00004807	1/5
black matt	**1722F85-885**	2TKA00004072	1/5

Prod Flush mounting cover frames 85mm, IP21/IP44 4-gang uct

Colour	Type	Order code	Pack/Qty.
white	**1724F85-84**	2TKA000409G1	1/5
anthracite	**1724F85-81**	2TKA000407G1	1/5
aluminium	**1724F85-83**	2TKA000408G1	1/5
white matt	**1724F85-884**	2TKA00004750	1/5
black matt	**1724F85-885**	2TKA00004076	1/5

Flush mounting cover frames 85mm, IP21/IP44 5-gang

Colour	Type	Order code	Pack/Qty.
white	**1725F85-84**	2TKA000434G1	1/5
anthracite	**1725F85-81**	2TKA000432G1	1/5
aluminium	**1725F85-83**	2TKA000433G1	1/5
white matt	**1725F85-884**	2TKA00004805	1/5
black matt	**1725F85-885**	2TKA00004077	1/5

Flush mounting cover frames 100mm, IP21/IP44 1-gang

Flush mounting cover frames for 2-gang devices, such as double socket outlets. Also 1-gang devices, such as switches, can be installed using adapter 2519-xx. Suitable for both horizontal and vertical installation. Standard installation is IP21 on smooth surface. When using seal 2463 installation is IP21 on rough surface. Final IP class of installation is defined by the used center plate (IP21/IP44).

Colour	Type	Order code	Pack/Qty.
white	**1721F100-84**	2TKA000279G1	1/10
anthracite	**1721F100-81**	2TKA000275G1	1/10
aluminium	**1721F100-83**	2TKA000277G1	1/10
white matt	**1721F100-884**	2TKA00004806	1/10
black matt	**1721F100-885**	2TKA00004078	1/10

Flush mounting cover frames 85mm, IP21/IP44 2-gang

Colour	Type	Order code	Pack/Qty.
white	**1722F100-84**	2TKA000329G1	1/5
anthracite	**1722F100-81**	2TKA000325G1	1/5
aluminium	**1722F100-83**	2TKA000327G1	1/5
white matt	**1722F100-884**	2TKA00004749	1/5
black matt	**1722F100-885**	2TKA00004079	1/5

Flush mounting cover frames 85mm, IP21/IP44 3-gang

Colour	Type	Order code	Pack/Qty.
white	**1723F100-84**	2TKA000369G1	1/5
anthracite	**1723F100-81**	2TKA000365G1	1/5
aluminium	**1723F100-83**	2TKA000367G1	1/5
white matt	**1723F100-884**	2TKA00004803	1/5
black matt	**1723F100-885**	2TKA00004080	1/5

IMPRESSIVO CENTER PLATES FOR JUSSI SIGNALLING PRODUCTS.
INCLUDES THE NEEDED PARTS TO MODIFY THE JUSSI SIGNALLING PRODUCT TO IMPRESSIVO.

Impressivo

Frames

Flush mounting cover frames 85mm, IP21/IP44
4-gang

Colour	Type	Order code	Pack/Qty.
white	**1724F100-84**	2TKA000405G1	1/5
anthracite	**1724F100-81**	2TKA000403G1	1/5
aluminium	**1724F100-83**	2TKA000404G1	1/5
white matt	**1724F100-884**	2TKA00004801	1/5
black matt	**1724F100-885**	2TKA00004081	1/5

Flush mounting cover frames 85mm, IP21/IP44
5-gang

Colour	Type	Order code	Pack/Qty.
white	**1725F100-84**	2TKA000430G1	1/5
anthracite	**1725F100-81**	2TKA000428G1	1/5
aluminium	**1725F100-83**	2TKA000429G1	1/5
white matt	**1725F100-884**	2TKA00004808	1/5
black matt	**1725F100-885**	2TKA00004082	1/5

Switches

1-gang switches

Switch with screwless terminals and lamp possibility. Rocker with clip-on fastening. IP21 when wires are installed downwards.
16AX/250V, 2 X-terminals

1-gang 2-way switch

Colour	Type	Order code	Pack/Qty.
white	**1066A-84**	2TKA00001601	1/10
anthracite	**1066A-81**	2TKA00001602	1/10
aluminium	**1066A-83**	2TKA00001603	1/10
white matt	**1066A-884**	2TKA00004833	1/10
black matt	**1066A-885**	2TKA00004445	1/10

1-gang intermediate switch

white	**1067A-84**	2TKA00001846	1/10
anthracite	**1067A-81**	2TKA00001847	1/10
aluminium	**1067A-83**	2TKA00001848	1/10
white matt	**1067A-884**	2TKA00004833	1/10
black matt	**1067A-885**	2TKA00004445	1/10

2-gang switches

Switch with screwless terminals, no lamp possibility. Rocker with clip-on fastening. IP21 when wires are installed downwards.
16AX/250V, 2 X-terminals

2-gang 1-way switch

Colour	Type	Order code	Pack/Qty.
white	**1065A-84**	2TKA00001598	1/10
anthracite	**1065A-81**	2TKA00001599	1/10
aluminium	**1065A-83**	2TKA00001600	1/10
white matt	**1065A-884**	2TKA00004831	1/10
black matt	**1065A-885**	2TKA00004446	1/10

2-gang 2-way switch

white	**10666A-84**	2TKA00001843	1/10
anthracite	**10666A-81**	2TKA00001844	1/10
aluminium	**10666A-83**	2TKA00001845	1/10

3-gang switch

Switch with screwless terminals, no lamp possibility. Rocker with clip-on fastening. IP21 when wires are installed downwards.
16AX/250V, 2 X-terminals

white	**10631A-84**	2TKA00001849	1/10
anthracite	**10631A-81**	2TKA00001850	1/10
aluminium	**10631A-83**	2TKA00001851	1/10

Impressivo

Switches

2-pole switch

Switch with screwless terminals and lamp possibility. Rocker with clip-on fastening. IP21 when wires are installed downwards.
16AX/250V, 2 X-terminals

Colour	Type	Order code	Pack/Qty.
white	**1062A-84**	2TKA00001840	1/10

1-gang push switch

Push switch with screwless terminals and lamp possibility. Rocker with clip-on fastening. Delivered with clear lens. IP21 when the wires are installed downwards.
10A/250V, 2 X-terminals

Colour	Type	Order code	Pack/Qty.
white	**1461A-84**	2TKA00001604	1/10
anthracite	**1461A-81**	2TKA00001605	1/10
aluminium	**1461A-83**	2TKA00001606	1/10

4-gang Schuko socket outlet, IP21

The device is based on two 2-gang socket outlet inserts, which are internally connected. The socket outlet inserts have shutters. There are screwless terminals for each contact of the socket outlet insert for max 4 rigid wires. No X-terminals. IP21 when the wires are installed downwards.

Colour	Type	Order code	Pack/Qty.
white	**404EA-84**	2TKA00001613	1/20
anthracite	**404EA-81**	2TKA00001614	1/20
aluminium	**404EA-83**	2TKA00001615	1/20
white matt	**404EA-884**	2TKA00004826	1/20
black matt	**404EA-885**	2TKA00004462	1/20

2-gang Schuko socket outlet, IP21

Screwless terminals for each contact of the socket outlet for max 4 rigid wires. No X-terminals. The socket outlet insert has shutters. IP21 when the wires are installed downwards.

Colour	Type	Order code	Pack/Qty.
white	**402EA-84**	2TKA00001607	1/10
anthracite	**402EA-81**	2TKA00001608	1/10
aluminium	**402EA-83**	2TKA00001609	1/10
white matt	**402EA-884**	2TKA00004825	1/10
black matt	**402EA-885**	2TKA00004442	1/10

Socket outlets

2-gang Schuko outlets with special colour, IP21

Screwless terminals for each contact of the socket outlet for max 4 rigid wires. No X-terminals. The socket outlet insert has shutters. IP21 when the wires are installed downwards. These socket outlets can be used, for instance, in hospitals and offices, when there is a need to limit socket outlet use to certain applications.

Colour	Type	Order code	Pack/Qty.
red	**402EA-02**	2TKA00002966	1/10
orange	**402EA-03**	2TKA00002967	1/10
green	**402EA-05**	2TKA00002968	1/10
blue	**402EA-06**	2TKA00002969	1/10

2-gang Schuko socket outlet, surface mounting, IP44

Product includes Schuko socket outlet insert, center plate with lid, surface mountig cover frame and box. The socket outlet insert has shutters and screwless terminals, branching terminals.

Colour	Type	Order code	Pack/Qty.
anthracite	**302ESW-81**	2TKA00001754	1/10
white	**302ESW-84**	2TKA00004467	1/10
white matt	**302ESW-884**	2TKA00004836	1/10
black matt	**302ESW-885**	2TKA00004468	1/10

2-gang Schuko socket outlet, lath installation, IP21

Schuko 2-gang socket outlet for lath installation. There are screwless terminals for each contact of the socket outlet for max 4 rigid wires. No X-terminals. The socket outlet insert has shutters.

Colour	Type	Order code	Pack/Qty.
white	**402EL-84**	2TKA00002273	1/10
anthracite	**402EL-81**	2TKA00002274	1/10
aluminium	**402EL-83**	2TKA00002275	1/10
white matt	**402EL-884**	2TKA00004827	1/10
black matt	**402EL-885**	2TKA00004444	1/10

2-gang Schuko socket outlet, corner installation, IP21

Schuko 2-gang socket outlet for corner installation. There are screwless terminals for each contact of the socket outlet for max 4 rigid wires. No X-terminals. The socket outlet insert has shutters.

Colour	Type	Order code	Pack/Qty.
white	**402EE-84**	2TKA00001610	1/20
anthracite	**402EE-81**	2TKA00001611	1/20
aluminium	**402EE-83**	2TKA00001612	1/20
white matt	**402EL-884**	2TKA00004834	1/20
black matt	**402EL-885**	2TKA00004443	1/20

Impressivo

Boxes and accessories

Surface mounting box 85mm, IP21

Surface mounting box for 1-gang devices such as antenna and data outlet and others, insert height max. 26 mm. Large devices such as dimmers doesn't fit in the box. Delivery includes bottom plate and cover.
h=41mm

Colour	Type	Order code	Pack/Qty.
white	**1721A-84**	2TKA00001616	1/10
anthracite	**1721A-81**	2TKA00001617	1/10
aluminium	**1721A-83**	2TKA00001618	1/10
white matt	**1721A-884**	2TKA00004853	1/10
black matt	**1721A-885**	2TKA00004455	1/10

Lath installation box 85mm, IP21

Lath installation box for 1-gang devices such as antenna and data outlet and others, insert height max. 26 mm. Large devices such as dimmers doesn't fit in the box. Delivery includes bottom plate and cover.

Colour	Type	Order code	Pack/Qty.
white	**1721L-84**	2TKA00002276	1/10
anthracite	**1721L-81**	2TKA00002277	1/10
aluminium	**1721L-83**	2TKA00002278	1/10
white matt	**1721L-884**	2TKA00004854	1/10
black matt	**1721L-885**	2TKA00004454	1/10

Corner installation box 85mm, IP21

Surface mounting box for 2 devices, also for electronic devices. Horizontal or vertical installation in corners. Use with 85mm 2-gang cover frame.

Colour	Type	Order code	Pack/Qty.
white	**1722H-84**	2TKA00002279	1/20
anthracite	**1722H-81**	2TKA00002280	1/20
aluminium	**1722H-83**	2TKA00002281	1/20
white matt	**1722H-884**	2TKA00004859	1/20
black matt	**1722H-885**	2TKA00004460	1/20

Surface mounting bottom plate, IP21/IP44

Surface mounting bottom plate for flush mounted products, insert height max. 26mm. To be combined with 85mm and 100mm surface mounting cover frames 172xS85-xx and 172xS100-xx. Socket outlets are IP44 when using center plates with hinged lid. Switches and push switches are IP44 when combined with screw fastening rocker. Wires must be installed downwards for IP44 protection class. Dimmers do not fit in the box.

Colour	Type	Order code	Pack/Qty.
	2456.26	2TKA000769G1	10/100

DCL lamp outlet for mounting boxes

The DCL outlet can be installed on standard wall mounting boxes (screw distance c/c 60 mm). It is safe and easy to use for the end consumer, as they can snap-in the DCL plug in the socket. The outlet is typically installed on wall but can also be installed in ceiling.
85x85mm

Colour	Type	Order code	Pack/Qty.
white	**AKK6-84**	2TKA00000934	10/100
anthracite	**AKK6-81**	2TKA00000936	10/100
aluminium	**AKK6-83**	2TKA00000935	10/100
black matt	**AKK6-885**	2TKA00004433	10/100

High surface mounting boxes 80mm, IP20

Surface mounting boxes for high 1-gang devices, such as dimmers, insert height max. 40 mm. Suitable for both horizontal and vertical installation. Delivery includes box and cover frame.
h=54mm

1-gang

Colour	Type	Order code	Pack/Qty.
white	**1721S80-84**	2TKA00000993	1/10
anthracite	**1721S80-81**	2TKA00000991	1/10
aluminium	**1721S80-83**	2TKA00000992	1/10
white matt	**1721S80-884**	2TKA00004852	1/10
black matt	**1721S80-885**	2TKA00004456	1/10

2-gang

Colour	Type	Order code	Pack/Qty.
white	**1722S80-84**	2TKA00000996	1/5
anthracite	**1722S80-81**	2TKA00000994	1/5
aluminium	**1722S80-83**	2TKA00000995	1/5
white matt	**1722S80-884**	2TKA00004845	1/5
black matt	**1722S80-885**	2TKA00004458	1/5

3-gang

Colour	Type	Order code	Pack/Qty.
white	**1723S80-84**	2TKA00000999	1/10
anthracite	**1723S80-81**	2TKA00000997	1/10
aluminium	**1723S80-83**	2TKA00000998	1/10
white matt	**1723S80-884**	2TKA00004858	1/10
black matt	**1723S80-885**	2TKA00004459	1/10

Impressivo – surface mounting

Cover frames

Surface mounting cover frames 85mm, IP21/IP44 1-gang

Surface mounting cover frames for 1-gang devices, such as switches and socket outlets. Suitable for both horizontal and vertical installation. To be used with surface mounting box 2456.26. Dimmers do not fit in the frame. Wires must be installed downwards for IP44 protection class. Final IP class of installation is defined by the used center plate (IP21/IP44).
h=40mm

Colour	Type	Order code	Pack/Qty.
white	**1721S85-84**	2TKA000302G1	1/50
anthracite	**1721S85-81**	2TKA000298G1	1/50
aluminium	**1721S85-83**	2TKA000300G1	1/50
white matt	**1721S85-884**	2TKA00004856	1/50
black matt	**1721S85-885**	2TKA00004447	1/50

Surface mounting cover frames 85mm, IP21/IP44 2-gang

Colour	Type	Order code	Pack/Qty.
white	**1722S85-84**	2TKA000347G1	1/25
anthracite	**1722S85-81**	2TKA000344G1	1/25
aluminium	**1722S85-83**	2TKA000345G1	1/25
white matt	**1722S85-884**	2TKA00004860	1/25
black matt	**1722S85-885**	2TKA00004450	1/25

Surface mounting cover frames 85mm, IP21/IP44 3-gang

Colour	Type	Order code	Pack/Qty.
white	**1723S85-84**	2TKA000385G1	1/25
anthracite	**1723S85-81**	2TKA000383G1	1/25
aluminium	**1723S85-83**	2TKA000384G1	1/25
white matt	**1723S85-884**	2TKA00004861	1/25
black matt	**1722S85-885**	2TKA00004449	1/25

Surface mounting cover frames 85mm, IP21/IP44 4-gang

Colour	Type	Order code	Pack/Qty.
white	**1724S85-84**	2TKA000417G1	1/25
anthracite	**1724S85-81**	2TKA000415G1	1/25
aluminium	**1724S85-83**	2TKA000416G1	1/25

Surface mounting cover frames 100mm, IP21/IP44 1-gang

Surface mounting cover frames for 2-gang devices, such as double socket outlets. Also 1-gang devices can be installed using the adaptor 2519-xx. Suitable for both horizontal and vertical installation. To be used with surface mounting box 2456.26. Wires must be installed downwards for IP44 protection class. Final IP class of installation is defined by the used center plate (IP21/IP44).
h=40mm

Colour	Type	Order code	Pack/Qty.
white	**1721S100-84**	2TKA000295G1	1/50
anthracite	**1721S100-81**	2TKA000291G1	1/50
aluminium	**1721S100-83**	2TKA000293G1	1/50
white matt	**1721S100-884**	2TKA00004855	1/50
black matt	**1721S100-885**	2TKA00004451	1/50

Surface mounting cover frames 100mm, IP21/IP44 2-gang

Colour	Type	Order code	Pack/Qty.
white	**1722S100-84**	2TKA000342G1	1/25
anthracite	**1722S100-81**	2TKA000340G1	1/25
aluminium	**1722S100-83**	2TKA000341G1	1/25
white matt	**1722S100-884**	2TKA00004851	1/25
black matt	**1722S100-885**	2TKA00004452	1/25

Surface mounting cover frames 100mm, IP21/IP44 3-gang

Colour	Type	Order code	Pack/Qty.
white	**1723S100-84**	2TKA000381G1	1/25
anthracite	**1723S100-81**	2TKA000379G1	1/25
aluminium	**1723S100-83**	2TKA000380G1	1/25
white matt	**1723S100-884**	2TKA00004452	1/25
black matt	**1723S100-885**	2TKA00004453	1/25

Surface mounting cover frames 100mm, IP21/IP44 4-gang

Colour	Type	Order code	Pack/Qty.
white	**1724S100-84**	2TKA000413G1	1/20
anthracite	**1724S100-81**	2TKA000411G1	1/20
aluminium	**1724S100-83**	2TKA000412G1	1/20

Impressivo – surface mounting

Boxes and accessories

Bus Coupler

For connecting operating elements such as a push buttons (1-, 2-, 4-fold), motion detectors, room thermostats etc. to the ABB i-bus® KNX system.

Colour	Type	Order code	Pack/Qty.
	6120/12-101-500	2TKA00000219	1/10

Switch sensor, 1/2-gang

Flush mounted multifunction push button for ABB i-bus KNX 6120/12-101-500. With labelling field, transparent labelling sheet with standard symbols included in delivery. Support of KNX functions through innovative colour concept yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Cover plate not included.

Colour	Type	Order code	Pack/Qty.
white	**6125/02-84-500**	2TKA00000271	1/10
anthracite	**6125/02-81-500**	2TKA00000266	1/10
aluminium	**6125/02-83-500**	2TKA00000269	1/10

Switch sensor, 2/4-gang

Flush mounted multifunction push button for ABB i-bus KNX 6120/12-101-500. With labelling field, transparent labelling sheet with standard symbols included in delivery. Support of KNX functions through innovative colour concept yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Cover plate not included.

Colour	Type	Order code	Pack/Qty.
white	**6126/02-84-500**	2TKA00000311	1/10
anthracite	**6126/02-81-500**	2TKA00000297	1/10
aluminium	**6126/02-83-500**	2TKA00000239	1/10

Switch sensor, 4/8-gang



Flush mounted multifunction push button for ABB i-bus KNX 6120/12-101-500. With labelling field, transparent labelling sheet with standard symbols included in delivery. Support of KNX functions through innovative colour concept yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Cover plate not included.

Colour	Type	Order code	Pack/Qty.
white	**6127/02-84-500**	2TKA00000327	1/10
anthracite	**6127/02-81-500**	2TKA00000323	1/10
aluminium	**6127/02-83-500**	2TKA00000325	1/10

Switch sensor, 3/6-gang with IR-receiver

Flush mounted multifunction push button with IR-receiver for ABB i-bus KNX 6120/12-101-500. With labelling field, transparent labelling sheet with standard symbols included in delivery. Support of KNX functions through innovative colour concept yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green.
Cover plate not included. Controlling with the IR remote control 6010-25.

Colour	Type	Order code	Pack/Qty.
white	**6129/01-84-500**	2TKA00000246	1/10
anthracite	**6129/01-81-500**	2TKA00000242	1/10
aluminium	**6129/01-83-500**	2TKA00000244	1/10

IR remote control

Infrared hand-held transmitter. Network-independent remote control for infrared receiver and KNX flushmounted infrared interface (10 consumers switchable in 2 groups, 1 – 5/6 – 10, programming and selection of 2 MEMO memories per address group). Supply: 4 alkaline manganese batteries, IEC LR03 (not included in scope of supply) Range: frontal, approx. 15 m.

Colour	Type	Order code	Pack/Qty.
	6010-25	2TKA001017G1	1

Control element, 2/4gang, with RTC multi-function/colour concept

For ABB i-bus® KNX bus coupler 6120/12-101-500, 6120/13-500. Support of KNX functions through innovative colour concept (yellow = lighting, blue = blind, orange = RTC, magenta = scene and white = neutral/no function assigned) or standard illumination red/green.
Rocker switch left/right (switching/dimming/blind/ value sender/light scenes/fan function). Master/slave configuration. With base-load operation. The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in auto- matic mode. Transparent labelling sheet with standard symbols included in delivery. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Control element: Switch contacts left/right, also for selecting setpoint and mode of operation. Display elements: LCD showing operation mode and temperature. Protection class (Device): IP20. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 63 mm x 63 mm.

Colour	Type	Order code	Pack/Qty.
grey metallic	**6128/28-803-500**	2TKA00003208	1/10
white	**6128/28-84-500**	2TKA00003206	1/10
anthracite	**6128/28-81-500**	2TKA00003204	1/10
aluminium	**6128/28-83-500**	2TKA00003205	1/10

Impressivo – surface mounting

Boxes and accessories

Movement detector, with manual operation

Flush mounted sensor with Comfort II multi-lens. For ABB i-bus KNX 6120/12-101-500. Movement detector with up to 4 channels. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.) Cover plate not included.

Colour	Type	Order code	Pack/Qty.
white	**6122/02-84-500**	2TKA00000233	1/10
anthracite	**6122/02-81-500**	2TKA00000229	1/10
aluminium	**6122/02-83-500**	2TKA00000231	1/10

Cover frames

1-, 2- and 4-gang switch sensors with bus coupler

1-, 2- and 4-gang standard switch sensor that includes bus coupler. LED for displaying the output. 2 LEDs on each button. Cover plate not included.

1-gang pushbuttons

Colour	Type	Order code	Pack/Qty.
white	**6125/01-84-500**	2TKA00000262	1/10
anthracite	**6125/01-81-500**	2TKA00000257	1/10
aluminium	**6125/01-83-500**	2TKA00000260	1/10

2-gang pushbuttons

Colour	Type	Order code	Pack/Qty.
white	**6126/01-84-500**	2TKA00000293	1/10
anthracite	**6126/01-81-500**	2TKA00000284	1/10
aluminium	**6126/01-83-500**	2TKA00000288	1/10

4-gang pushbuttons

Colour	Type	Order code	Pack/Qty.
white	**6127/01-84-500**	2TKA00000319	1/10
anthracite	**6127/01-81-500**	2TKA00000315	1/10
aluminium	**6127/01-83-500**	2TKA00000317	1/10

Busch-Watchdog ® 180 Sensor Standard, Select with integrated bus coupler, FM

Movement detector with up to 4 channels. The bus can be connected via enclosed terminal block. With integrated KNX bus coupler.

Colour	Type	Order code	Pack/Qty.
white	**6122/10-84-500**	2TKA00003199	1/10
anthracite	**6122/10-81-500**	2TKA00003197	1/10
aluminium	**6122/10-83-500**	2TKA00003198	1/10

Impressivo – surface mounting

KNX

Push-button coupling 2gang with integrated bus coupler

Support of KNX functions through innovative color concept yellow = lighting, blue = blind, orange = RTC, magenta = scene and white = neutral/no function assigned) or standard illumination red/green. With middle position. The bus can be connected via enclosed terminal block.

Colour	Type	Order code	Pack/Qty.
	Push-button coupling 2gang		
	6108/06-500	2TKA00003193	1/10
	Rocker 1gang		
white	**SR-1-84**	2TKA00002776	1/10
anthracite	**SR-1-81**	2TKA00002774	1/10
aluminium	**SR-1-83**	2TKA00002775	1/10

Push-button coupling 4gang with integrated bus coupler

Support of KNX functions through innovative color concept yellow = lighting, blue = blind, orange = RTC, magenta = scene and white = neutral/no function assigned) or standard illumination red/green. With middle position. The bus can be connected via enclosed terminal block.

Colour	Type	Order code	Pack/Qty.
	Push-button coupling 4gang		
	6108/07-500	2TKA00003194	1/10
	Rocker 2gang left/right		
white	**SR-2-84**	2CKA006220A0154	1/10
anthracite	**SR-2-81**	2CKA006220A0152	1/10
aluminium	**SR-2-83**	2CKA006220A0153	1/10

Room thermostat, heating/cooling operation

Control element with room thermostat function for triggering the heating, ventilation and fancoil actuators. For controlling commercially available valve drives. With display of set-value temperature. Master/slave configuration. With base-load operation. The bus can be connected via enclosed terminal block.

Colour	Type	Order code	Pack/Qty.
	Room thermostat		
	6108/18-500	2TKA00003196	1/10
	Thermostat center plate		
white	**CP-RTC-84**	2TKA00002784	1/10
anthracite	**CP-RTC-81**	2TKA00002782	1/10
aluminium	**CP-RTC-83**	2TKA00002783	1/10

Room Temperature Controller, Commercial, FM



Room thermostat without „local operation“ incl. insert for centre plate for cooling element. For controlling commercially available valve drives. Can only be used with a cover plate 2114-xxx or 6541-xxx, with the exception of 6541-20. -21.-260 and -266. For control of up to 5-level ventilation actuators Master/slave configuration. With base-load operation. The bus can be connected via enclosed terminal block.

Colour	Type	Order code	Pack/Qty.
	Flush-mounted room thermostat		
	6108/08-500	2TKA00003007	1/10
	Center plate with cooling element		
white	**6541-84**	2TKA001459G1	1/10
anthracite	**6541-81**	2TKA001457G1	1/10
aluminium	**6541-83**	2TKA001458G1	1/10

Busch-Watchdog ® 180 Sensor Standard, Select with integrated bus coupler, FM

Movement detector with up to 4 channels. The bus can be connected via enclosed terminal block. With integrated KNX bus coupler.

Colour	Type	Order code	Pack/Qty.
white	**6122/10-84-500**	2TKA00003199	1/10
anthracite	**6122/10-81-500**	2TKA00003197	1/10
aluminium	**6122/10-83-500**	2TKA00003198	1/10

Impressivo

KNX

Push-button coupling 2gang with integrated bus coupler

Support of KNX functions through innovative color concept yellow = lighting, blue = blind, orange = RTC, magenta = scene and white = neutral/no function assigned) or standard illumination red/green. With middle position. The bus can be connected via enclosed terminal block.

Colour	Type	Order code	Pack/Qty.
	Push-button coupling 2-gang		
	6108/06-500	2TKA00003193	1/10
	Rocker 1-gang		
white	**SR-1-84**	2TKA00002776	1/10
anthracite	**SR-1-81**	2TKA00002774	1/10
aluminium	**SR-1-83**	2TKA00002775	1/10
	Rocker 1-gang "lighting" symbol		
white	**SRL-1-84**	2CKA006220A0142	1/10
anthracite	**SRL-1-81**	2CKA006220A0140	1/10
aluminium	**SRL-1-83**	2CKA006220A0141	1/10
	Rocker 1-gang "scene" symbol		
white	**SRS-1-84**	2CKA006220A0148	1/10
anthracite	**SRS-1-81**	2CKA006220A0146	1/10
aluminium	**SRS-1-83**	2CKA006220A0147	1/10
	Rocker 1-gang "dimming" symbol		
white	**SRD-1-84**	2CKA006220A0151	1/10
anthracite	**SRD-1-81**	2CKA006220A0149	1/10
aluminium	**SRD-1-83**	2CKA006220A0150	1/10
	Rocker 1-gang "blinds" symbol		
white	**SRB-1-84**	2CKA006220A0145	1/10
anthracite	**SRB-1-81**	2CKA006220A0143	1/10
aluminium	**SRB-1-83**	2CKA006220A0144	1/10

Push-button coupling 4gang with integrated bus coupler

Support of KNX functions through innovative color concept yellow = lighting, blue = blind, orange = RTC, magenta = scene and white = neutral/no function assigned) or standard illumination red/green. With middle position. The bus can be connected via enclosed terminal block.

Colour	Type	Order code	Pack/Qty.
	Push-button coupling 4-gang		
	6108/07-500	2TKA00003194	1/10
	Rocker 2-gang left/right		
white	**SR-2-84**	2CKA006220A0154	1/10
anthracite	**SR-2-81**	2CKA006220A0152	1/10
aluminium	**SR-2-83**	2CKA006220A0153	1/10
	Rocker 2-gang "lighting" symbol left		
white	**SRL-2-L-84**	2CKA006220A0157	1/10
anthracite	**SRL-2-L-81**	2CKA006220A0155	1/10
aluminium	**SRL-2-L-83**	2CKA006220A0156	1/10
	Rocker 2-gang "scene" symbol left		
white	**SRS-2-L-84**	2CKA006220A0163	1/10
anthracite	**SRS-2-L-81**	2CKA006220A0161	1/10
aluminium	**SRS-2-L-83**	2CKA006220A0162	1/10
	Rocker 2-gang "dimming" symbol left		
white	**SRD-2-L-84**	2CKA006220A0166	1/10
anthracite	**SRD-2-L-81**	2CKA006220A0164	1/10
aluminium	**SRD-2-L-83**	2CKA006220A0165	1/10
	Rocker 2-gang "lighting" symbol right		
white	**SRL-2-R-84**	2CKA006220A0169	1/10
anthracite	**SRL-2-R-81**	2CKA006220A0167	1/10
aluminium	**SRL-2-R-83**	2CKA006220A0168	1/10
	Rocker 2-gang "scene" symbol right		
white	**SRS-2-R-84**	2CKA006220A0175	1/10
anthracite	**SRS-2-R-81**	2CKA006220A0173	1/10
aluminium	**SRS-2-R-83**	2CKA006220A0174	1/10
	Rocker 2-gang "dimming" symbol right		
white	**SRD-2-R-84**	2CKA006220A0260	1/10
anthracite	**SRD-2-R-81**	2CKA006220A0258	1/10
aluminium	**SRD-2-R-83**	2CKA006220A0259	1/10
	Rocker 2-gang "blinds" symbol		
white	**SRB-2-84**	2CKA006220A0160	1/10
anthracite	**SRB-2-81**	2CKA006220A0158	1/10
aluminium	**SRB-2-83**	2CKA006220A0159	1/10

Impressivo

KNX

Busch-Watchdog ® 180 Sensor Standard, Select with integrated bus coupler, FM

Movement detector with up to 4 channels. The bus can be connected via enclosed terminal block. With integrated KNX bus coupler.

Colour	Type	Order code	Pack/Qty.
white	**6122/10-84-500**	2TKA00003199	1/10
anthracite	**6122/10-81-500**	2TKA00003197	1/10
aluminium	**6122/10-83-500**	2TKA00003198	1/10

Room thermostat, heating/cooling operation

Control element with room thermostat function for triggering the heating, ventilation and fancoil actuators. For controlling commercially available valve drives. With display of set-value temperature. Master/slave configuration. With base-load operation. The bus can be connected via enclosed terminal block.

Colour	Type	Order code	Pack/Qty.
	Room thermostat		
	6108/18-500	2TKA00003196	1/10
	Thermostat center plate		
white	**CP-RTC-84**	2TKA00002784	1/10
anthracite	**CP-RTC-81**	2TKA00002782	1/10
aluminium	**CP-RTC-83**	2TKA00002783	1/10

Power supply

ABB-free@home power supply with integrated choke. Fast diagnosis due to LED display for operational readiness and errors. Module width 4 MW.
Power supply 640mA 30/230V DIN.

Colour	Type	Order code	Pack/Qty.
	PS-M-64.1.1	2TKA00002701	1/10

System Access Point

For commissioning and remote control of the ABB-free@home® system. Allows the execution of astro and time programs.

Colour	Type	Order code	Pack/Qty.
	Connector port System access point 230V WL		
	External antenna for SAP-S-2		
	SAP-1-WL		1/10

1gang

Sensor unit and different rockers

Colour	Type	Order code	Pack/Qty.
	Sensor unit 1-gang		
	SU-F-1.0.1	2TKA00002717	1/10
	Rocker 1-gang		
white	**SR-1-84**	2TKA00002776	1/10
anthracite	**SR-1-81**	2TKA00002774	1/10
aluminium	**SR-1-83**	2TKA00002775	1/10

2-gang

Sensor unit and different rockers. Both sides of the rocker are ordered separately.

Colour	Type	Order code	Pack/Qty.
	Sensor unit 2-gang		
	SU-F-2.0.1	2TKA00002719	1/10
	Rocker 2-gang left/right		
white	**SR-2-84**	2CKA006220A0154	1/10
anthracite	**SR-2-81**	2CKA006220A0152	1/10
aluminium	**SR-2-83**	2CKA006220A0153	1/10

Switch actuator sensor

Insert and different rockers

Colour	Type	Order code	Pack/Qty.
	Switch actuator sensor 1/1-gang		
	SSA-F-1.1.1	2TKA00002796	1/10
	Rocker 1-gang		
white	**SR-1-84**	2TKA00002776	1/10
anthracite	**SR-1-81**	2TKA00002774	1/10
aluminium	**SR-1-83**	2TKA00002775	1/10

Impressivo

KNX

Switch actuator sensor

Insert 2/1-gang, 2/2-gang and different rockers. Both sides of the rocker are ordered separately.

Colour	Type	Order code	Pack/Qty.
	Switch actuator sensor 2/1-gang		
	SSA-F-2.1.1	2TKA00002797	1/10
	Switch actuator sensor 2/2-gang		
	SSA-F-2.2.1	2TKA00002798	1/10
	Rocker 2-gang left/right		
white	**SR-2-84**	2CKA006220A0154	1/10
anthracite	**SR-2-81**	2CKA006220A0152	1/10
aluminium	**SR-2-83**	2CKA006220A0153	1/10

Labeling plate

Labeling plate cover plates.
Useable text area is (12 x 52)mm.

Colour	Type	Order code	Pack/Qty.
	2752	2TKA00000053	10/100

ABB-free@home

1-gang rockers with icon

Colour	Type	Order code	Pack/Qty.
	Rocker 1-gang "lighting" symbol		
white	**SRL-1-84**	2CKA006220A0142	1/10
anthracite	**SRL-1-81**	2CKA006220A0140	1/10
aluminium	**SRL-1-83**	2CKA006220A0141	1/10
	Rocker 1-gang "blinds" symbol		
white	**SRB-1-84**	2CKA006220A0145	1/10
anthracite	**SRB-1-81**	2CKA006220A0143	1/10
aluminium	**SRB-1-83**	2CKA006220A0144	1/10
	Rocker 1-gang "scene" symbol		
white	**SRS-1-84**	2CKA006220A0148	1/10
anthracite	**SRS-1-81**	2CKA006220A0146	1/10
aluminium	**SRS-1-83**	2CKA006220A0147	1/10
	Rocker 1-gang "dimming" symbol		
white	**SRD-1-84**	2CKA006220A0151	1/10
anthracite	**SRD-1-81**	2CKA006220A0149	1/10
aluminium	**SRD-1-83**	2CKA006220A0150	1/10

Impressivo

ABB-free@home

2-gang rockers with icon

Colour	Type	Order code	Pack/Qty.
Rocker 2-gang "lighting" symbol left			
white	**SRL-2-L-84**	2CKA006220A0157	1/10
anthracite	**SRL-2-L-81**	2CKA006220A0155	1/10
aluminium	**SRL-2-L-83**	2CKA006220A0156	1/10
Rocker 2-gang "scene" symbol left			
white	**SRS-2-L-84**	2CKA006220A0163	1/10
anthracite	**SRS-2-L-81**	2CKA006220A0161	1/10
aluminium	**SRS-2-L-83**	2CKA006220A0162	1/10
Rocker 2-gang "dimming" symbol left			
white	**SRD-2-L-84**	2CKA006220A0166	1/10
anthracite	**SRD-2-L-81**	2CKA006220A0164	1/10
aluminium	**SRD-2-L-83**	2CKA006220A0165	1/10
Rocker 2-gang "lighting" symbol right			
white	**SRL-2-R-84**	2CKA006220A0169	1/10
anthracite	**SRL-2-R-81**	2CKA006220A0167	1/10
aluminium	**SRL-2-R-83**	2CKA006220A0168	1/10
Rocker 2-gang "scene" symbol right			
white	**SRS-2-R-84**	2CKA006220A0175	1/10
anthracite	**SRS-2-R-81**	2CKA006220A0173	1/10
aluminium	**SRS-2-R-83**	2CKA006220A0174	1/10
Rocker 2-gang "dimming" symbol right			
white	**SRD-2-R-84**	2CKA006220A0260	1/10
anthracite	**SRD-2-R-81**	2CKA006220A0258	1/10
aluminium	**SRD-2-R-83**	2CKA006220A0259	1/10
Rocker 2-gang "blinds" symbol			
white	**SRB-2-84**	2CKA006220A0160	1/10
anthracite	**SRB-2-81**	2CKA006220A0158	1/10
aluminium	**SRB-2-83**	2CKA006220A0159	1/10

Dimming actuator 4gang

Multi-channel universal dimming actuator for controlling LEDs, incandescent lamps, 230 V halogen lamps, low-voltage halogen lamps with conventional or electronic transformers, and dimmable energy-saving halogen lamps. For dimmable retrofit LED lamps (LEDi). Increasing the maximum load via channel bridging possible. The outputs can be switched parallel in any combination. Outputs automatically recognise the connected load. In addition, the operating mode can be selected manually. Status indication of the channels via LED.

Colour	Type	Order code	Pack/Qty.
	Universal dimmer 4gang **DA-M-0.4.2**	2TKA00002715	1
	Compensator **6596**	2TKA00002992	1

Dim actuator sensor

For dimming 230 V~ loads. With integrated universal dimming actuator for controlling different lamps. The dimming function is available also without prior programming (pre-configured).

Colour	Type	Order code	Pack/Qty.
	Dimmer 1/1-gang **SDA-F-1.1.1**	2TKA00002800	1/10
Rocker 1-gang			
white	**SR-1-84**	2TKA00002776	1/10
anthracite	**SR-1-81**	2TKA00002774	1/10
aluminium	**SR-1-83**	2TKA00002775	1/10
	Compensator **6596**	2TKA00002992	1
	Dimmer 2/1-gang **SDA-F-2.1.1**	2TKA00002801	1/10
	Dimmer 2/1-gang WL **SDA-F-2.1.1-WL**		1/10
Rocker 2-gang left/right			
white	**SR-2-84**	2CKA006220A0154	1/10
anthracite	**SR-2-81**	2CKA006220A0152	1/10
aluminium	**SR-2-83**	2CKA006220A0153	1/10

Impressivo

ABB-free@home

Movement detector

For automatic switching of ABB-free@home® actuators dependent on movement and brightness.

Colour	Type	Order code	Pack/Qty.
white	**MD-F-1.0.1-84**	2TKA00002773	1/10
anthracite	**MD-F-1.0.1-81**	2TKA00002771	1/10
aluminium	**MD-F-1.0.1-83**	2TKA00002772	1/10

Movement detector/switch actuator

For automatic switching of ABB-free@home® actuators dependent on movement and brightness.
With integrated switch actuator. Switching function is available also without prior programming (pre-configured).

Colour	Type	Order code	Pack/Qty.
white	**MSA-F-1.1.1-84**	2TKA00002805	1/10
anthracite	**MSA-F-1.1.1-81**	2TKA00002803	1/10
aluminium	**MSA-F-1.1.1-83**	2TKA00002804	1/10

Room temperature controller

Control element with room temperature control function for controlling commercially available actuating drives or analogue actuating drives (continuous controllers) in connection with HA-M-0.6.1, HA-M-0.12.1. With display of set-value temperature. Only to be used in combination with ABB-free@home® room temperature controller cover plates CP-RTC-xxx.

Colour	Type	Order code	Pack/Qty.
	Room thermostat insert **RTC-F-1**	2TKA00002780	1/10
	Thermostat insert WL **RTC-F-1-WL**		1/10
	Thermostat insert 1-gang WL **RTC-F-2.1.1-WL**		1/10
	DP4-T-1	2TKA00003293	1/10
	DP4-1-611	2TKA00003291	1/10
	Flush-mounted installation box for 4,3" Touch panel ABB-free@home® **DP4-F**	2TKA00003295	1/10
	Thermostat center plate		
white	**CP-RTC-84**	2TKA00002784	1/10
anthracite	**CP-RTC-81**	2TKA00002782	1/10
aluminium	**CP-RTC-83**	2TKA00002783	1/10
	Thermostat cover plate fan coil controller		
white	**CP-FCC-84**	2TKA00003234	1/10
anthracite	**CP-FCC-81**	2TKA00003232	1/10
aluminium	**CP-FCC-83**	2TKA00003233	1/10
anthracite	4,3" Touch Panel free@home Thermostat **DP4-1-625**	2TKA00003292	1/10

Blind actuator sensor

For controlling blind and awning motors. With integrated blind actuator. Blind function is available also without prior programming (pre-configured).

Colour	Type	Order code	Pack/Qty.
	Blind actuator sensor 1/1-gang **SBA-F-1.1.1**	2TKA00002806	1/10
	Blind actuator sensor 1/1-gang WL **SBA-F-1.1.1-WL**		1/10
	Blind actuator sensor 2/1-gang **SBA-F-2.1.1**	2TKA00003051	1/10
	Blind actuator sensor 2/1-gang WL **SBA-F-2.1.1-WL**		1/10
	Rocker 1-gang		
white	**SR-1-84**	2TKA00002776	1/10
anthracite	**SR-1-81**	2TKA00002774	1/10
aluminium	**SR-1-83**	2TKA00002775	1/10
	Rocker 1-gang "blinds" symbol		
white	**SRB-1-84**	2CKA006220A0145	1/10
anthracite	**SRB-1-81**	2CKA006220A0143	1/10
aluminium	**SRB-1-83**	2CKA006220A0144	1/10

Zoni®
Matt and elegant

Precise in every detail with natural shape. Switches and sockets you will love.

01 white
02 white matt
03 nude
04 olive
05 greige
06 grey
07 black matt
08 black matt/ white

- Modern switches with app and Bluetooth control
- Brand new shape, trendy with new colours – all. switches in matt finish
- Two-tone frames
- New sockets, safer then ever
- Designed and manufactured in the Czech Republic

Zoni®
Standard inserts

The new generation of ABB flexTronics® switches underlines the comprehensivness of our offer.
Our wide range brings all you need for modern and high-quality wiring in family and apartment buildings.

switch / push-switch

switch / push-switch / with orientation or signalization LED

switch / push-switch with label fields

2-pole/3-pole switch


serial switch / intermediate switch


3gang switch

card switch with orientation LED

dimmer with rotary control element

push-button dimmer

timer

movement senzor

blind switch

touch blind switch

comfort blind switch with timer


Friends of Hue smart switch *

thermostat with rotary control

universal programmable thermostat, with floating cover

air quality sensor

antena socket TV+R / TV+R+SAT

speaker socket for stereo connection

communication socket USB / VGA / HDMI

USB charger

coms socket with angled outlet

Radio DAB+ and FM with Bluetooth

Radio DAB+ and FM

Radio iNet

speaker

orientation light

orientaton light with movement senzor

cable outlet

Blank plate

central vacuum cleaner socket

socket

socket with USB charger

socket with overvoltage protection

socket with RCD

double socket with turned upper cavity

double socket with overvoltage protection

1 to 5 gang frame for horizontal and vertical installation

* Set Friends of Hue smart switch available only in white color.

—
01 white
switch + socket
—
02 white
—
03 black matt/ whte
—
04 black matt
—
05 matt white

—
01

—
02

—
03

—
04

—
05

Play the game of lights and shadows

If you like contrast,
you can freely combine.
Not just black and white in form
of two-layer frames, but
even glossy and matte surfaces.

Matt colour is universal, just
like black and white.
It looks the same regardless
of lighting conditions,
no fingerprints remain on the surface

Zoni®
Trendy colours

Soft earthy colours inspired by nature allow switches and sockets to blend in wall shades, tone in tone, or to stand out on clean white walls as a striking addition to the interior.

01

02



03

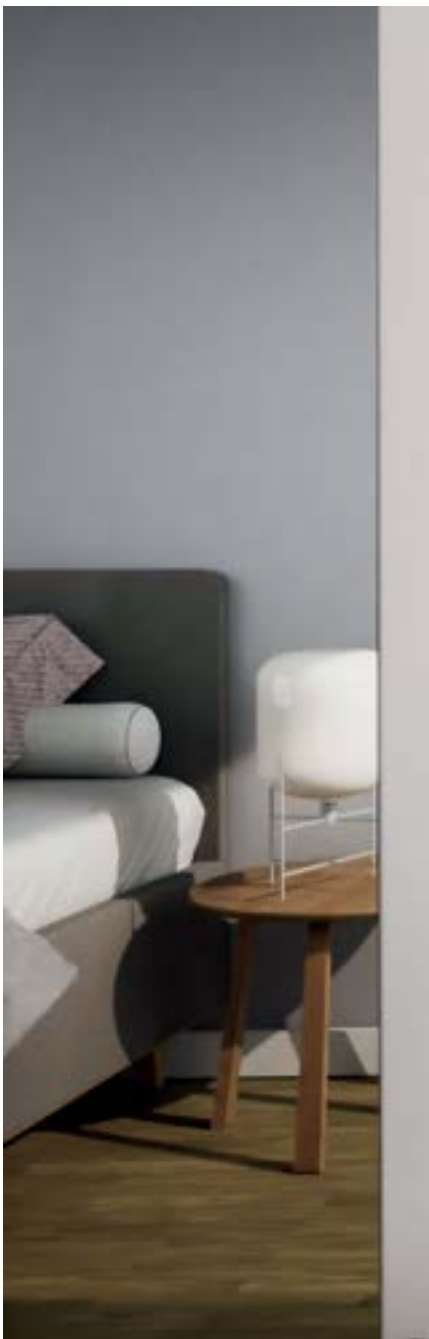

—
04

—
05

—
01 nude
switch + socket
—
02 nude
—
03 olive
—
04 greige
—
05 grey

Zoni®

Rocker switches / push switches

Rocker Switch Mechanism

Rated voltage: 250 V AC, Rated current: 10 AX , Screwless terminals, With optional illumination. Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
1gang 1way	**3559-A01345**	2CHX590135A4000	20
1gang 1way , claws	**3559-A01445**	2CHX590145A4000	20
1gang 1way, with N terminal	**3559-A21345**	2CHX592135A4000	20
1gang 1way, with N terminal, claws	**3559-A21445**	2CHX592145A4000	20
1gang 2way	**3559-A06345**	2CHX590635A4000	20
1gang 2way, claws	**3559-A06445**	2CHX590645A4000	20
1gang 2way switch insert with N terminal	**3559-A25345**	2CHX592535A4000	20
1gang 2way switch insert with N terminal, claws	**3559-A25445**	2CHX592545A4000	20
Intermediate switch insert	**3559-A07345**	2CHX590735A4000	20
Intermediate switch insert, claws	**3559-A07445**	2CHX590745A4000	20
DP 1gang 1way	**3559-A02345**	2CHX590235A4000	20
DP 1gang 1way, claws	**3559-A02445**	2CHX590245A4000	20

Rocker Switch Mechanism

Rated voltage: 250 V AC, Rated current: 10 AX, Screwless terminals, Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
2gang 1way	**3559-A05345**	2CHX590535A4000	20
2gang 1way, claws	**3559-A05445**	2CHX590545A4000	20

Rocker push-switch mechanism

Rated voltage: 250 V AC, Rated current: 10 A, Screwless terminals, With optional illumination. Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
2gang 1way	**3559-A87345**	2CHX598735A4000	20
2gang 1way, claws	**3559-A87445**	2CHX598745A4000	20

Rocker push-switch mechanism

Rated voltage: 250 V AC, Rated current: 10 A, Screwless terminals, With optional illumination. Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
1gang 1way, with N terminal	**3559-A91345**	2CHX599135A4000	20
1gang 1way, with N terminal, claws	**3559-A91445**	2CHX599145A4000	20
1gang 2way with N terminal	**3559-A86345**	2CHX598635A4000	20
1gang 2way, with N terminal, claws	**3559-A86445**	2CHX598645A4000	20

Rocker switch mechanism

Rated voltage: 250 V AC, Rated current: 10 AX, Screwless terminals, Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
2gang 2way	**3559-A52345**	2CHX595235A4000	20
2gang 2way, claws	**3559-A52445**	2CHX595245A4000	20

Rocker switch/push-switch mechanism combination

Rated voltage: 250 V AC, Rated current: 10 A, Screwless terminals, Fixation via screws if mentioned in text below also claws available.

	Type	Order code	Pack/Qty.
2gang 2way	**3559-A53345**	2CHX595335A4000	20
2gang 2way, claws	**3559-A53445**	2CHX595345A4000	20

Rocker switch mechanism 3pole

	Type	Order code	Pack/Qty.
1 gang 1way, 3-pole	**1011-0-0816 CZ**	2CHP041011A0816	10

Zoni®

Rocker switches / push switches

Rocker Switch Mechanism

Rated voltage: 250 V AC, Rated current: 16 A, Screwless terminals, Fixation via screws or claws.

	Type	Order code	Pack/Qty.
3gang 1way, SP, claws	**10631UBSC**	2TKA000153G1	10

Blind switch with interlock, 2gang 1way

Flush Mounted Inserts 1-pole switch and push switch 10 A. Switch insert Venetian blind

	Type	Order code	Pack/Qty.
2gang 1way, 1-pole	**3559-A89345**	2CHX598935A4000	10

Blind switch with interlock, 2gang 1way, claws

3559-A89445 Blind rocker switch mechanism 3559-A89445

	Type	Order code	Pack/Qty.
2gang 1way, claws	**3559-A89445**	2CHX598945A4000	10

Blind push-switch with interlock, 2gang 1way

	Type	Order code	Pack/Qty.
2gang 1way	**3559-A88345**	2CHX598835A4000	10

Blind push-switch with interlock, 2gang 1way, claws



Flush Mounted Inserts 1-pole switch 10 A. 3559-A88445 Blind rocker push-switch mechanism 3559-A88445

	Type	Order code	Pack/Qty.
2gang 1way, claws	**3559-A88445**	2CHX598845A4000	10

Zoni®
Switches

Card switch mechanism

The contact will close once a card 54 × 86 mm is inserted into the cover slot. Rated voltage: 250 V AC, Rated current: 10 A, Screwless terminals, Fixation via screws or claws. Suitable for use with orientation neon lamps 3916-xxx

	Type	Order code	Pack/Qty.
1gang 1way, with N terminal, claws	**3559-A92445**	2CHX599245A4000	10

Rocker

Colour	Type	Order code	Pack/Qty.
white	**3559T-A00651 500**	2CHT590651A4500	20
black matt	**3559T-A00651 237**	2CHT590651A4237	20
white matt	**3559T-A00651 240**	2CHT590651A4240	20
grey	**3559T-A00651 241**	2CHT590651A4241	20
nude	**3559T-A00651 242**	2CHT590651A4242	20
olive	**3559T-A00651 243**	2CHT590651A4243	20
greige	**3559T-A00651 244**	2CHT590651A4244	20

Rocker with transparent lens

Colour	Type	Order code	Pack/Qty.
white	**3559T-A00653 500**	2CHT590653A4500	20
black matt	**3559T-A00653 237**	2CHT590653A4237	20
white matt	**3559T-A00653 240**	2CHT590653A4240	20
grey	**3559T-A00653 241**	2CHT590653A4241	20
nude	**3559T-A00653 242**	2CHT590653A4242	20
olive	**3559T-A00653 243**	2CHT590653A4243	20
greige	**3559T-A00653 244**	2CHT590653A4244	20

Rocker with printing I/O

Colour	Type	Order code	Pack/Qty.
white	**3559T-A00655 500**	2CHT590655A4500	20
black matt	**3559T-A00655 237**	2CHT590655A4237	20
white matt	**3559T-A00655 240**	2CHT590655A4240	20
grey	**3559T-A00655 241**	2CHT590655A4241	20
nude	**3559T-A00655 242**	2CHT590655A4242	20
olive	**3559T-A00655 243**	2CHT590655A4243	20
greige	**3559T-A00655 244**	2CHT590655A4244	20

Rocker with label field

Colour	Type	Order code	Pack/Qty.
white	**3559T-A00610 500**	2CHT590610A4500	20
black matt	**3559T-A00610 237**	2CHT590610A4237	20
white matt	**3559T-A00610 240**	2CHT590610A4240	20
grey	**3559T-A00610 241**	2CHT590610A4241	20
nude	**3559T-A00610 242**	2CHT590610A4242	20
olive	**3559T-A00610 243**	2CHT590610A4243	20
greige	**3559T-A00610 244**	2CHT590610A4244	20

Label field for rocker with bell symbol

Colour	Type	Order code	Pack/Qty.
Transparent	**3559T-A00271**	2CHT590271A4000	20
Transparent	**3559T-A00272**	2CHT590272A4000	20

Zoni®

Rocker switches / push switches

Rocker divided

Colour	Type	Order code	Pack/Qty.
white	**3559T-A00652 500**	2CHT590652A4500	20
black matt	**3559T-A00652 237**	2CHT590652A4237	20
white matt	**3559T-A00652 240**	2CHT590652A4240	20
grey	**3559T-A00652 241**	2CHT590652A4241	20
nude	**3559T-A00652 242**	2CHT590652A4242	20
olive	**3559T-A00652 243**	2CHT590652A4243	20
greige	**3559T-A00652 244**	2CHT590652A4244	20

Rocker for 3gang 1way switch, SP

Colour	Type	Order code	Pack/Qty.
white	**3559T-A00666 500**	2CHT590666A4500	20
black matt	**3559T-A00666 237**	2CHT590666A4237	20
white matt	**3559T-A00666 240**	2CHT590666A4240	20
grey	**3559T-A00666 241**	2CHT590666A4241	20
nude	**3559T-A00666 242**	2CHT590666A4242	20
olive	**3559T-A00666 243**	2CHT590666A4243	20
greige	**3559T-A00666 244**	2CHT590666A4244	20

Blind switch rocker with markings

Colour	Type	Order code	Pack/Qty.
white	**3559T-A00662 500**	2CHT590662A4500	20
black matt	**3559T-A00662 237**	2CHT590662A4237	20
white matt	**3559T-A00662 240**	2CHT590662A4240	20
grey	**3559T-A00662 241**	2CHT590662A4241	20
nude	**3559T-A00662 242**	2CHT590662A4242	20
olive	**3559T-A00662 243**	2CHT590662A4243	20
greige	**3559T-A00662 244**	2CHT590662A4244	20

Cover plate for card switch

Colour	Type	Order code	Pack/Qty.
white	**3559T-A00700 500**	2CHT590700A4500	#N/D
black matt	**3559T-A00700 237**	2CHT590700A4237	#N/D
white matt	**3559T-A00700 240**	2CHT590700A4240	#N/D
grey	**3559T-A00700 241**	2CHT590700A4241	#N/D
nude	**3559T-A00700 242**	2CHT590700A4242	#N/D
olive	**3559T-A00700 243**	2CHT590700A4243	#N/D
greige	**3559T-A00700 244**	2CHT590700A4244	#N/D

Rocker for 3pole switch with markings

Colour	Type	Order code	Pack/Qty.
white	**3559T-A00933 500**	2CHT590933A4500	20
black matt	**3559T-A00933 237**	2CHT590933A4237	20
white matt	**3559T-A00933 240**	2CHT590933A4240	20
grey	**3559T-A00933 241**	2CHT590933A4241	20
nude	**3559T-A00933 242**	2CHT590933A4242	20
olive	**3559T-A00933 243**	2CHT590933A4243	20
greige	**3559T-A00933 244**	2CHT590933A4244	20

Switch with rocker, 1gang 1way

Rated voltage: 250 V AC, Rated current: 10 AX,
Screwless terminals, Fixation via screws.
Individual packaging for retail

Colour	Type	Order code	Pack/Qty.
white	**3559T-A01345 500W**	2CHT590135A6500	12
black matt	**3559T-A01345 237W**	2CHT590135A6237	12
white matt	**3559T-A01345 240W**	2CHT590135A6240	12
grey	**3559T-A01345 241W**	2CHT590135A6241	12
nude	**3559T-A01345 242W**	2CHT590135A6242	12
olive	**3559T-A01345 243W**	2CHT590135A6243	12
greige	**3559T-A01345 244W**	2CHT590135A6244	12

Zoni®
Switches

Switch with rocker, 2 gang 1 way

Rated voltage: 250 V AC, Rated current: 10 AX, Screwless terminals, Fixation via screws. Individual packaging for retail

Colour	Type	Order code	Pack/Qty.
white	**3559T-A05345 500W**	2CHT590535A6500	12
black matt	**3559T-A05345 237W**	2CHT590535A6237	12
white matt	**3559T-A05345 240W**	2CHT590535A6240	12
grey	**3559T-A05345 241W**	2CHT590535A6241	12
nude	**3559T-A05345 242W**	2CHT590535A6242	12
olive	**3559T-A05345 243W**	2CHT590535A6243	12
greige	**3559T-A05345 244W**	2CHT590535A6244	12

Push switch with rocker, 1 gang 1 way, N

Rated voltage: 250 V AC, Rated current: 10 A, Screwless terminals, Fixation via screws. Individual packaging for retail

Colour	Type	Order code	Pack/Qty.
white	**3559T-A52345 500W**	2CHT595235A6500	12
black matt	**3559T-A52345 237W**	2CHT595235A6237	12
white matt	**3559T-A52345 240W**	2CHT595235A6240	12
grey	**3559T-A52345 241W**	2CHT595235A6241	12
nude	**3559T-A52345 242W**	2CHT595235A6242	12
olive	**3559T-A52345 243W**	2CHT595235A6243	12
greige	**3559T-A52345 244W**	2CHT595235A6244	12

Switch with rocker, 1 gang 2 way

Rated voltage: 250 V AC, Rated current: 10 AX, Screwless terminals, With optional illumination. Fixation via screws. Individual packaging for retail

Colour	Type	Order code	Pack/Qty.
white	**3559T-A06345 500W**	2CHT590635A6500	12
black matt	**3559T-A06345 237W**	2CHT590635A6237	12
white matt	**3559T-A06345 240W**	2CHT590635A6240	12
grey	**3559T-A06345 241W**	2CHT590635A6241	12
nude	**3559T-A06345 242W**	2CHT590635A6242	12
olive	**3559T-A06345 243W**	2CHT590635A6243	12
greige	**3559T-A06345 244W**	2CHT590635A6244	12

Switch with rocker, 2gang 2way

Rated voltage: 250 V AC, Rated current: 10 AX, Screwless terminals, Fixation via screws. Individual packaging for retail

Colour	Type	Order code	Pack/Qty.
white	**3559T-A91345 500W**	2CHT599135A6500	12
black matt	**3559T-A91345 237W**	2CHT599135A6237	12
white matt	**3559T-A91345 240W**	2CHT599135A6240	12
grey	**3559T-A91345 241W**	2CHT599135A6241	12
nude	**3559T-A91345 242W**	2CHT599135A6242	12
olive	**3559T-A91345 243W**	2CHT599135A6243	12
greige	**3559T-A91345 244W**	2CHT599135A6244	12

Switch with rocker, intermediate

Rated voltage: 250 V AC, Rated current: 10 AX, Screwless terminals, With optional illumination. Fixation via screws. Individual packaging for retail

Colour	Type	Order code	Pack/Qty.
white	**3559T-A07345 500W**	2CHT590735A6500	12
black matt	**3559T-A07345 237W**	2CHT590735A6237	12
white matt	**3559T-A07345 240W**	2CHT590735A6240	12
grey	**3559T-A07345 241W**	2CHT590735A6241	12
nude	**3559T-A07345 242W**	2CHT590735A6242	12
olive	**3559T-A07345 243W**	2CHT590735A6243	12
greige	**3559T-A07345 244W**	2CHT590735A6244	12

Switch with rocker, 2 gang 1 way, IP44

Colour	Type	Order code	Pack/Qty.
white	**3559T-A05940 500**	2CHT590594A6500	10
black matt	**3559T-A05940 237**	2CHT590594A6237	10
white matt	**3559T-A05940 240**	2CHT590594A6240	10
grey	**3559T-A05940 241**	2CHT590594A6241	10
nude	**3559T-A05940 242**	2CHT590594A6242	10
olive	**3559T-A05940 243**	2CHT590594A6243	10
greige	**3559T-A05940 244**	2CHT590594A6244	10

Zoni®
Sockets outlets

Switch with rocker, 1 gang 2 way, IP44

Colour	Type	Order code	Pack/Qty.
white	**3559T-A06940 500**	2CHT590694A6500	10
black matt	**3559T-A06940 237**	2CHT590694A6237	10
white matt	**3559T-A06940 240**	2CHT590694A6240	10
grey	**3559T-A06940 241**	2CHT590694A6241	10
nude	**3559T-A06940 242**	2CHT590694A6242	10
olive	**3559T-A06940 243**	2CHT590694A6243	10
greige	**3559T-A06940 244**	2CHT590694A6244	10

Switch with rocker, intermediate, IP44

Colour	Type	Order code	Pack/Qty.
white	**3559T-A07940 500**	2CHT590794A6500	10
black matt	**3559T-A07940 237**	2CHT590794A6237	10
white matt	**3559T-A07940 240**	2CHT590794A6240	10
grey	**3559T-A07940 241**	2CHT590794A6241	10
nude	**3559T-A07940 242**	2CHT590794A6242	10
olive	**3559T-A07940 243**	2CHT590794A6243	10
greige	**3559T-A07940 244**	2CHT590794A6244	10

Switch with rocker, 2gang 2way, IP44

Colour	Type	Order code	Pack/Qty.
white	**3559T-A52940 500**	2CHT595294A6500	10
black matt	**3559T-A52940 237**	2CHT595294A6237	10
white matt	**3559T-A52940 240**	2CHT595294A6240	10
grey	**3559T-A52940 241**	2CHT595294A6241	10
nude	**3559T-A52940 242**	2CHT595294A6242	10
olive	**3559T-A52940 243**	2CHT595294A6243	10
greige	**3559T-A52940 244**	2CHT595294A6244	10

Blind switch with rocker, 2gang 1way, IP44

Colour	Type	Order code	Pack/Qty.
white	**3559T-A88940 500**	2CHT598894A6500	10
black matt	**3559T-A88940 237**	2CHT598894A6237	10
white matt	**3559T-A88940 240**	2CHT598894A6240	10
grey	**3559T-A88940 241**	2CHT598894A6241	10
nude	**3559T-A88940 242**	2CHT598894A6242	10
olive	**3559T-A88940 243**	2CHT598894A6243	10
greige	**3559T-A88940 244**	2CHT598894A6244	10

Comprising Friends of Hue smart switch insert



Consitsting of Friends of Hue smart switch insert 6716 U-500. Comprising 2gang rocker 6221T-xx for Friends of Hue smart switch. Consisting of 1gang Zoni cover frames. Comprising fixing plate and intermediate ring. Smarter light switches for wireless remote control of Philips Hue lamps For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
white	**6221T-C01000 500**	2CHT621000C4500	1

Zoni®
Rocker switches / push switches

Control element for smart switch 2gang

Colour	Type	Order code	Pack/Qty.
white	**6221T-A01010 500**	2CHT621010A4500	5
black matt	**6221T-A01010 237**	2CHT621010A4237	5
white matt	**6221T-A01010 240**	2CHT621010A4240	5
grey	**6221T-A01010 241**	2CHT621010A4241	5
nude	**6221T-A01010 242**	2CHT621010A4242	5
olive	**6221T-A01010 243**	2CHT621010A4243	5
greige	**6221T-A01010 244**	2CHT621010A4244	5

Friends of Hue smart switch insert

Wall-mounted transmitter, 2/4 channel. Smarter light switches for wireless remote control of Philips Hue lamps. For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology.
Combinable with the Busch-Jaeger switch range Busch-balance®SI.
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
	6716/01 U-500	2CKA006710A0031	1

Zoni®
Sockets outlets

Single socket with pin,shutters

Colour	Type	Order code	Pack/Qty.
white	**6619T-A06657 500**	2CHT196657A4500	10
black matt	**6619T-A06657 237**	2CHT196657A4237	10
white matt	**6619T-A06657 240**	2CHT196657A4240	10
grey	**6619T-A06657 241**	2CHT196657A4241	10
nude	**6619T-A06657 242**	2CHT196657A4242	10
olive	**6619T-A06657 243**	2CHT196657A4243	10
greige	**6619T-A06657 244**	2CHT196657A4244	10

Single socket with pin, shutters

Rated voltage: 250 V AC, Rated current: 16 A, Screwless terminals, Fixation via screws. Individual packaging for retail

Colour	Type	Order code	Pack/Qty.
white	**6619T-A06657 500W**	2CHT196657A6500	18
black matt	**6619T-A06657 237W**	2CHT196657A6237	18
white matt	**6619T-A06657 240W**	2CHT196657A6240	18
grey	**6619T-A06657 241W**	2CHT196657A6241	18
nude	**6619T-A06657 242W**	2CHT196657A6242	18
olive	**6619T-A06657 243W**	2CHT196657A6243	18
greige	**6619T-A06657 244W**	2CHT196657A6244	18

Cover for single socket with pin

Spare parts for single socket type: 6619

Colour	Type	Order code	Pack/Qty.
white	**ND6619T-A02341 500**	2CHT192341A8500	18
black matt	**ND6619T-A02341 237**	2CHT192341A8237	18
white matt	**ND6619T-A02341 240**	2CHT192341A8240	18
grey	**ND6619T-A02341 241**	2CHT192341A8241	18
nude	**ND6619T-A02341 242**	2CHT192341A8242	18
olive	**ND6619T-A02341 243**	2CHT192341A8243	18
greige	**ND6619T-A02341 244**	2CHT192341A8244	18

Zoni®
Sockets outlets

Socket outlet with earthing pin, IP44, shuttered, with cover

Colour	Type	Order code	Pack/Qty.
white	**6619T-A06995 500**	2CHT196995A6500	10
black matt	**6619T-A06995 237**	2CHT196995A6237	10
white matt	**6619T-A06995 240**	2CHT196995A6240	10
grey	**6619T-A06995 241**	2CHT196995A6241	10
nude	**6619T-A06995 242**	2CHT196995A6242	10
olive	**6619T-A06995 243**	2CHT196995A6243	10
greige	**6619T-A06995 244**	2CHT196995A6244	10

SCHUKO socket outlet, shuttered

Colour	Type	Order code	Pack/Qty.
white	**6620T-A07657 500**	2CHT207657A4500	10
black matt	**6620T-A07657 237**	2CHT207657A4237	10
white matt	**6620T-A07657 240**	2CHT207657A4240	10
grey	**6620T-A07657 241**	2CHT207657A4241	10
nude	**6620T-A07657 242**	2CHT207657A4242	10
olive	**6620T-A07657 243**	2CHT207657A4243	10
greige	**6620T-A07657 244**	2CHT207657A4244	10

Shuko socket outlet, without shutters

Colour	Type	Order code	Pack/Qty.
white	**6620T-A08337 500**	2CHT208337A4500	10
black matt	**6620T-A08337 237**	2CHT208337A4237	10
white matt	**6620T-A08337 240**	2CHT208337A4240	10
grey	**6620T-A08337 241**	2CHT208337A4241	10
nude	**6620T-A08337 242**	2CHT208337A4242	10
olive	**6620T-A08337 243**	2CHT208337A4243	10
greige	**6620T-A08337 244**	2CHT208337A4244	10

SCHUKO socket outlet, IP44, shuttered

Colour	Type	Order code	Pack/Qty.
white	**6620T-A07995 500**	2CHT207995A6500	10
black matt	**6620T-A07995 237**	2CHT207995A6237	10
white matt	**6620T-A07995 240**	2CHT207995A6240	10
grey	**6620T-A07995 241**	2CHT207995A6241	10
nude	**6620T-A07995 242**	2CHT207995A6242	10
olive	**6620T-A07995 243**	2CHT207995A6243	10
greige	**6620T-A07995 244**	2CHT207995A6244	10

Double socket with pin,shutters

Colour	Type	Order code	Pack/Qty.
white	**5513T-C02157 500**	2CHT132157C4500	10
white matt	**5513T-C02157 240**	2CHT132157C240	10
black matt	**5513T-C02157 237**	2CHT132157C4237	10
black matt / white	**5513T-C02157 137**	2CHT132157C4137	10
grey	**5513T-C02157 141**	2CHT132157C4141	10
nude	**5513T-C02157 142**	2CHT132157C4142	10
olive	**5513T-C02157 143**	2CHT132157C4143	10
greige	**5513T-C02157 144**	2CHT132157C4144	10

Double socket with pin,shutters

Rated voltage: 250 V AC, Rated current: 16 A, Screwless terminals, Fixation via screws. Individual packaging for retail

Colour	Type	Order code	Pack/Qty.
white	**5513T-C02157 500W**	2CHT132157C6500	10
black matt / white	**5513T-C02157 137W**	2CHT132157C6137	10
grey / white	**5513T-C02157 141W**	2CHT132157C6141	10
nude / white	**5513T-C02157 142W**	2CHT132157C6142	10
olive / white	**5513T-C02157 143W**	2CHT132157C6143	10
greige / white	**5513T-C02157 144W**	2CHT132157C6144	10
black matt	**5513T-C02157 237W**	2CHT132157C6237	10
white matt	**5513T-C02157 240W**	2CHT132157C6240	10

Zoni®
Sockets outlets

Cover for double socket with pin

Spare parts for double socket type: 5513

Colour	Type	Order code	Pack/Qty.
white	**ND5513T-A02351 500**	2CHT132351A8500	16
black matt / white	**ND5513T-A02151 137**	2CHT132151A8137	16
grey / white	**ND5513T-A02151 141**	2CHT132151A8141	16
nude / white	**ND5513T-A02151 142**	2CHT132151A8142	16
olive / white	**ND5513T-A02151 143**	2CHT132151A8143	16
greige / white	**ND5513T-A02151 144**	2CHT132151A8144	16
black matt	**ND5513T-A02151 237**	2CHT132151A8237	16
white matt	**ND5513T-A02151 500**	2CHT132151A8500	16

Double socket, side contact, claws, shutters

Colour	Type	Order code	Pack/Qty.
white	**5522T-C03458 500**	2CHT223458C4500	10
black matt	**5522T-C03458 237**	2CHT223458C4237	10
white matt	**5522T-C03458 240**	2CHT223458C4240	10
grey	**5522T-C03458 141**	2CHT223458C4141	10
nude	**5522T-C03458 142**	2CHT223458C4142	10
olive	**5522T-C03458 143**	2CHT223458C4143	10
greige	**5522T-C03458 144**	2CHT223458C4144	10
black matt/white	**5522T-C03458 137**	2CHT223458C4137	10

Single socket with overvoltage protection

Colour	Type	Order code	Pack/Qty.
white	**6699T-A06657 500**	2CHT966657A4500	1
black matt	**6699T-A06657 237**	2CHT966657A4237	1
white matt	**6699T-A06657 240**	2CHT966657A4240	1
grey	**6699T-A06657 241**	2CHT966657A4241	1
nude	**6699T-A06657 242**	2CHT966657A4242	1
olive	**6699T-A06657 243**	2CHT966657A4243	1
greige	**6699T-A06657 244**	2CHT966657A4244	1

Double socket with overvoltage protection

Colour	Type	Order code	Pack/Qty.
white	**5593T-C02357 500**	2CHT922357C4500	1
white matt	**5593T-C02357 240**	2CHT922357C4240	1
black matt	**5593T-C02357 237**	2CHT922357C4237	1
black matt / white	**5593T-C02357 137**	2CHT922357C4137	1
grey	**5593T-C02357 141**	2CHT922357C4141	1
nude	**5593T-C02357 142**	2CHT922357C4142	1
olive	**5593T-C02357 143**	2CHT922357C4143	1
greige	**5593T-C02357 144**	2CHT922357C4144	1

Socket outlet with earthing pin, shuttered, with USB charging

Colour	Type	Order code	Pack/Qty.
white	**5569T-A32357 500**	2CHT693257A4500	#N/D
black matt	**5569T-A32357 237**	2CHT693257A4237	#N/D
white matt	**5569T-A32357 240**	2CHT693257A4240	#N/D
grey	**5569T-A32357 241**	2CHT693257A4241	#N/D
nude	**5569T-A32357 242**	2CHT693257A4242	#N/D
olive	**5569T-A32357 243**	2CHT693257A4243	#N/D
greige	**5569T-A32357 244**	2CHT693257A4244	#N/D

Socket outlet with earthing pin with RCD

Residual operating current IΔn: 30 mA Type A, sensitivity to alternating and pulse current Rated current In: 16 A Rated frequency: 45 - 60 Hz Tripping time at 5× IΔn: max. 30 ms Rated short-circuit current: 3,000 A Resistance to impulse currents: 3,000 A, 8/20 µs Protection degree: IP 20 Connection cross-section: 1.5 to 2.5 mm2 Installation depth: 32 mm Installation is possible in TN-S, TN-C, TT systems. Additional sockets can be connected to the L', N' terminals, which will also be under the control of the residual current device.

Colour	Type	Order code	Pack/Qty.
	5526T-A02369 500	2CHT262369A4500	1

Zoni®

Telecommunications systems / multimedia

TV-R / TV-R-SAT socket outlet cover plate

Colour	Type	Order code	Pack/Qty.
white	**5011T-A00300 500**	2CHT080300A4500	10
black matt	**5011T-A00300 237**	2CHT080300A4237	10
white matt	**5011T-A00300 240**	2CHT080300A4240	10
grey	**5011T-A00300 241**	2CHT080300A4241	10
nude	**5011T-A00300 242**	2CHT080300A4242	10
olive	**5011T-A00300 243**	2CHT080300A4243	10
greige	**5011T-A00300 244**	2CHT080300A4244	10

Radio/TV socket outlet insert

Nominal impedance of inputs and outputs: 75 Ω
For coaxial cables with a diameter of 3.6 to 6.8 mm.
Fixation via screws or claws.

	Type	Order code	Pack/Qty.
terminal type	**5011-A3503**	2CHU083503A4000	1
loop-through type with 7 dB tap loss	**5011-A3607**	2CHU083607A4000	1
loop-through type with 14 dB tap loss	**5011-A3614**	2CHU083614A4000	1

Radio/TV/SAT socket outlet insert

Allows passage of a current of 500 mA DC and 22 kHz tone signal for LNB power supply and control.
Nominal impedance of inputs and outputs: 75 Ω
For coaxial cables with a diameter of 3.6 to 6.8 mm.
Fixation via screws or claws.

	Type	Order code	Pack/Qty.
terminal type	**5011-A3303**	2CHU083303A4000	1

Cover plate for communication inserts

Colour	Type	Order code	Pack/Qty.
white	**5014T-A00418 500**	2CHT290418A4500	10
black matt	**5014T-A00418 237**	2CHT290418A4237	10
white matt	**5014T-A00418 240**	2CHT290418A4240	10
grey	**5014T-A00418 241**	2CHT290418A4241	10
nude	**5014T-A00418 242**	2CHT290418A4242	10
olive	**5014T-A00418 243**	2CHT290418A4243	10
greige	**5014T-A00418 244**	2CHT290418A4244	10

Cover plate for communication inserts, flat

Colour	Type	Order code	Pack/Qty.
white	**5014T-A02018 500**	2CHT292018A4500	10
black matt	**5014T-A02018 237**	2CHT292018A4237	10
white matt	**5014T-A02018 240**	2CHT292018A4240	10
grey	**5014T-A02018 241**	2CHT292018A4241	10
nude	**5014T-A02018 242**	2CHT292018A4242	10
olive	**5014T-A02018 243**	2CHT292018A4243	10
greige	**5014T-A02018 244**	2CHT292018A4244	10

Modular-Jack insert, shielded, RJ 45-8 Cat. 5eS

	Type	Order code	Pack/Qty.
	RJ45C5S	2CHY000055Z0000	1

Modular-Jack insert, non-shielded, RJ 45-8 Cat. 5e

	Type	Order code	Pack/Qty.
	RJ45C5U	2CHY000056Z0000	1

Zoni®

Telecommunications systems / multimedia

Modular-Jack insert, shielded, RJ 45-8 Cat. 6AS

	Type	Order code	Pack/Qty.
	RJ45C6AS	2CHY000057Z0000	1

Modular-Jack insert, non-shielded, RJ 45-8 Cat. 6

	Type	Order code	Pack/Qty.
	RJ45C6U	2CHY000058Z0000	1

Cable outlet

Colour	Type	Order code	Pack/Qty.
white	**3938T-A00034 500**	2CHT480034A4500	5
black matt	**3938T-A00034 237**	2CHT480034A4237	5
white matt	**3938T-A00034 240**	2CHT480034A4240	5
grey	**3938T-A00034 241**	2CHT480034A4241	5
nude	**3938T-A00034 242**	2CHT480034A4242	5
olive	**3938T-A00034 243**	2CHT480034A4243	5
greige	**3938T-A00034 244**	2CHT480034A4244	5

Blank plate

Colour	Type	Order code	Pack/Qty.
white	**3902T-A00001 500**	2CHT050001A4500	10
black matt	**3902T-A00001 237**	2CHT050001A4237	10
white matt	**3902T-A00001 240**	2CHT050001A4240	10
grey	**3902T-A00001 241**	2CHT050001A4241	10
nude	**3902T-A00001 242**	2CHT050001A4242	10
olive	**3902T-A00001 243**	2CHT050001A4243	10
greige	**3902T-A00001 244**	2CHT050001A4244	10

Cover plate for USB / HDMI / VGA / stereo connection unit

Colour	Type	Order code	Pack/Qty.
white	**5014T-A00040 500**	2CHT290040A4500	10
black matt	**5014T-A00040 237**	2CHT290040A4237	10
white matt	**5014T-A00040 240**	2CHT290040A4240	10
grey	**5014T-A00040 241**	2CHT290040A4241	10
nude	**5014T-A00040 242**	2CHT290040A4242	10
olive	**5014T-A00040 243**	2CHT290040A4243	10
greige	**5014T-A00040 244**	2CHT290040A4244	10

USB power adapter insert, flush-mounted [1] [2] [3] with USB-A & USB-C interface



For supply and support of mobile devices via USB-cable.
With USB type A and USB type C female connector.
To support two devices at the same time. Supports automatic negotiating of optimum charging parameters for the shortest charging times. Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A. Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0.
With electronic short-circuit protection.
With electronic overload protection. Rated voltage: 220 - 230 V AC Rated frequency: 50 Hz - 60 Hz. Outputs: 2x USB charging interface. Suitable for: Only USB-A bus occupied: Rated current: 3000 mA. Output voltage: 5 V-
Suitable for: Only USB-C bus occupied: Rated power: 18 W
Suitable for: USB-A and USB-C bus occupied. Total: Rated current: 3250 mA. Output voltage: 5 V-
Protection class (Device): IP 20, SELV
Temperature range (Device): 0 °C to 35 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.
[3] When cleaning the device, use dust cover 2098 for the USB-A connection.

High power adapter USB C, 65 W

	Type	Order code	Pack/Qty.
		2CKA006400A0437	1

Zoni®

Telecommunications systems / multimedia

Power supply insert USB charging station with USB C black

For power and charge of mobile devices via USB-C cable.
With USB type C female connector.
Supports high power and automatic negotiating of optimum charging parameters for the shortest charging times.
Support of charging protocols: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the Qualcomm quick charge protocols: QC 2.0, 3.0, 4.0 and 5.
Support of USB PD (power delivery): 3.1 incl. PPS (programmable power supply).
Support of manufacturer specific protocolls: Samsung AFC and Huawei FCP (with 20 W).
With electronic short-circuit protection.
With electronic overload protection.
No claws. Screw fastening via keyholes.

	Type	Order code	Pack/Qty.

Cover plate for USB-C charger

Colour	Type	Order code	Pack/Qty.
black matt	**5014T-A00100 237**	2CHT290100A4237	1
white matt	**5014T-A00100 240**	2CHT290100A4240	1
grey	**5014T-A00100 241**	2CHT290100A4241	1
nude	**5014T-A00100 242**	2CHT290100A4242	1
olive	**5014T-A00100 243**	2CHT290100A4243	1
greige	**5014T-A00100 244**	2CHT290100A4244	1
white	**5014T-A00100 500**	2CHT290100A4500	1

Cover plate for FM radio / Busch-Radio iNet / BT radio inserts

Colour	Type	Order code	Pack/Qty.
white	**3299T-A40200 500**	2CHT704020A4500	5
black matt	**3299T-A40200 237**	2CHT704020A4237	5
white matt	**3299T-A40200 240**	2CHT704020A4240	5
grey	**3299T-A40200 241**	2CHT704020A4241	5
nude	**3299T-A40200 242**	2CHT704020A4242	5
olive	**3299T-A40200 243**	2CHT704020A4243	5
greige	**3299T-A40200 244**	2CHT704020A4244	5

Flush Mounted Inserts Keystone BNC-F

Keystone module with integrateed F-Type connector. Plug&Play installation.

Colour	Type	Order code	Pack/Qty.
withe	**0229/22-500**	2CKA000230A0493	
black	**0229/23-500**	2CKA000230A0494	

Flush Mounted Inserts Keystone HDMI

Keystone module with integrated pre-wired HDMI 2.0 cable. Plug&Play installation. Cable length approx. 20cm

Colour	Type	Order code	Pack/Qty.
withe	**0229/32-500**	2CKA000230A0495	
black	**0229/33-500**	2CKA000230A0496	

Flush Mounted Inserts Keystone USB with USB C

Keystone module with integrated pre-wired USB 3.1 Gen2 cable. Plug&Play installation. Cable length approx. 15cm. Type C connector

Colour	Type	Order code	Pack/Qty.
withe	**0229/12-500**	2CKA000230A0497	
black	**0229/13-500**	2CKA000230A0498	

Flush Mounted Inserts SC-Duplex Angled, silver

Optical fibre termination socket outlet with integrated SC/APC Duplex connector with integrated shutters. Insertion loss of coupler < 0,20 dB. 4 integrated splice holders for CSP Crimp / Mini heat shrink tubings. Cable storage max. 1,8m. Suitable for TAE c-plates. We recommend to use a deep or special wallbox.

	Type	Order code	Pack/Qty.
4 gang	**0244/42-500**	2CKA000230A0503	
2 gang	**0244/22-500**	2CKA000230A0504	

Zoni®

Telecommunications systems / multimedia

Busch-Radio DAB+ [1])

DAB+ and RDS stereo radio alarm clock for flush-mounted installation. With high-resolution colour display for showing additional information. Reception frequency: 87.50 MHz - 108.00 MHz. Receive frequency (DAB+): 174 MHz – 240 MHz. With external AUX input/output, reversible. For mono/stereo operation. 8 radio stations storable. With time and date display.
With individual alarm and snooze function. With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches. With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Control/Signal outputs: 2, Loudspeaker output, impedance 4 Ohm
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8215 U-101-500	2CKA008200A0276	1/10

[1]) No claw. Screw-fixing via keyholes.

Busch-Radio BTconnect DAB+ [1])
With Bluetooth interface for music replay.

DAB+ and RDS stereo radio alarm clock for flush-mounted installation. With high-resolution colour display for showing additional information. With Bluetooth interface for music replay of mobile devices. Connection of external Bluetooth loudspeakers possible. Reception frequency: 87.50 MHz - 108.00 MHz. Receive frequency (DAB+): 174 MHz – 240 MHz.
With external AUX input/output, reversible.
For mono/stereo operation. 8 radio stations storable.
With time and date display.
With individual alarm and snooze function. With automatic switch-off function (automatic sleep mode).
With extension input to remote-controlled ON/OFF switches. With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed as 1gang and in multiple combinations.
Bluetooth specification: 4.2.
Bluetooth profiles supported: A2DP
Number of stored Bluetooth connections: max. 8
Control element: 4-button operation via floating rocker
Display elements: ICU graphic display with 280 DPI.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 2 W (RMS)
Protection class (Device): IP 20
Temperature range (Device): 5 °C to 40 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 47 mm
Mounting depth: 32 mm

Bluetooth

Colour	Type	Order code	Pack/Qty.
	8217 U-101-500	2CKA008200A0279	1/10

[1]) No claw. Screw-fixing via keyholes.

Cover plate for loudspeaker

Colour	Type	Order code	Pack/Qty.
white	**5016T-A00075 500**	2CHT660075A4500	5
black matt	**5016T-A00075 237**	2CHT660075A4237	5
white matt	**5016T-A00075 240**	2CHT660075A4240	5
grey	**5016T-A00075 241**	2CHT660075A4241	5
nude	**5016T-A00075 242**	2CHT660075A4242	5
olive	**5016T-A00075 243**	2CHT660075A4243	5
greige	**5016T-A00075 244**	2CHT660075A4244	5

Loudspeaker insert [1]) 5 cm (2")

With flat plug connector.
With broadband characteristics.
Rated output: 2 W (RMS)
Incl. speaker connection cable.
Frequency response: 200 - 20,000 Hz
Impedance: 4 Ohm
Protection class (Device): IP 20, SELV
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1/10

[1]) No claw. Screw-fixing via keyholes.

Zoni®
Dimmers

Center Pl. SF Dimmer

Colour	Type	Order code	Pack/Qty.
white	**3294T-A00123 500**	2CHT940123A4500	5
black matt	**3294T-A00123 237**	2CHT940123A4237	5
white matt	**3294T-A00123 240**	2CHT940123A4240	5
grey	**3294T-A00123 241**	2CHT940123A4241	5
nude	**3294T-A00123 242**	2CHT940123A4242	5
olive	**3294T-A00123 243**	2CHT940123A4243	5
greige	**3294T-A00123 244**	2CHT940123A4244	5

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7] [8] [9] Flush-mounted, LED, 2-100 W

With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
Via mode switch adjustable between leading edge control and trailing edge control.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With adjustable minimum brightness.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10%
Rated frequency: 50 Hz/60 Hz
Nominal power: 2 - 100 W/VA (retrofit LED loads).
Nominal power: 10 - 250 W/VA (non-LED loads).
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6523 U-102-500	2CKA006512A0335	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.
[8] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[9] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Busch-rotary dimmer [1] [2] [3] [4] flush mounted, 1-10V

With rotary control.
For controlling ballast units for fluorescent lamps with control output 1-10 V DC, control current max. 50 mA DC.
For LED control via control gears
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Rated power: 700 W/VA
IEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	2112 U-101-500	2CKA006599A2873	1/10

[1] Non-illuminable.
[2] Use cover plates 2115 J-.../2115-.../6540-... .
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Making-current limiters have to be provided in case of too high making currents.

Zoni®
Dimmers

Busch-rotary dimmer [1])
Flush-mounted, DALI, tunable white

For DALI broadcast service (via central telegram).
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
Fool proved.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Max. current consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE article no. 2116/11 U.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116 U	2CKA006599A3025	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-rotary dimmer [1]) Flush-mounted, DALI, with internal power supply, tunable white

For DALI broadcast service (via central telegram).
With integrated DALI power adaptor.
For switching and dimming up to 64 DALI- devices like electronic ballasts and transformers with DALI-interface.
With rotary control and ON/OFF push operation.
For changing the colour temperature of >tunable white< lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
With electronic short-circuit protection.
With electronic overload protection.
Brightness power-on level and backround brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Color of orientation light adjustable (18 presets and OFF).
Up to 5 potentiometers are connectable in parallel.
Up to 3 potentiometers are connectable in parallel in active mode.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
DALI-voltage: 15,5 V=
Rated current: max. 75 mA
Power consumption: < 2,5 W
Number of DALI-units:
37 in case of one active power-potentiometer
in case of three active power-potentiometer in parallel connection: 111
Active mode: the potentiometer is supporting the necessary control circuit for other DALI-devices.
Passive mode: the potentiometer is suitable as additional operation point.
Max. DALI-cable length: 300 m (1,5 - 2,5 mm²).
Without cover plate.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116/11 U	2CKA006599A3026	1

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Zoni®

Room thermostats / Timers

Cover plate for thermostat / Short-time timer / Comfort timer / Control element / Count-down timer and CO_2 sensor

Colour	Type	Order code	Pack/Qty.
white	**3299T-A40100 500**	2CHT704010A4500	5
black matt	**3299T-A40100 237**	2CHT704010A4237	5
white matt	**3299T-A40100 240**	2CHT704010A4240	5
grey	**3299T-A40100 241**	2CHT704010A4241	5
nude	**3299T-A40100 242**	2CHT704010A4242	5
olive	**3299T-A40100 243**	2CHT704010A4243	5
greige	**3299T-A40100 244**	2CHT704010A4244	5

Combination thermostat

Thermostat with low insert (20 mm mounting depth) meeting the Ecodesign requirements. The thermostat is pre-programmed. Rated voltage 230 V AC ± 10% 50 Hz. Output 1 no and connectors 1.5 mm² to 4 mm² Switching current 250 V AC / 16 (2) A, protection class II and protection class IP21.
Operating temperature 0 ° C to 35 ° C and storage temperature -20 ° C to 70 ° C.
Clock Accuracy (at 20 ° C) <+/- 0.5 sec / min.
Power consumption (standby) <0.05 W.
Floor sensor NTC 10kΩ @ 25˚C and external control (EXT connector) 230V AC / 10µA (same phase).

Colour	Type	Order code	Pack/Qty.
	TC16-20U	2TKA00004033	1

Busch-Short-time timer insert [1]) countdown timer

For time-programmed switching of electrical consumers.
With control cover, without cover plate.
Minimum timer time: 1 second.
Maximum timer time: 9:59:59 hours.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 1x Normally open contact
Rated current: 10 A, cos ϕ 1
Rated power: 2300 VA
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6465 U-101-500	2CKA006410A0393	1/10
Mounting boxes:	35 mm deep flush 1gang or Dual Box 3070-2/35 BSDB.		
Cover frames:	1gang frame 1721 BS-2xG or Dual Box frame 1722 BSDB-2xG.		
2gang product combinations:	2gang combination with adapter plate APBS in Dual Box only.		
neon indicator:	not applicable		

[1]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

CO Busch Raumluftsensor® room sensor

With display for carbon dioxide, humidity, temperature and air pressure. Setting values: carbon dioxide 800 ppm - 1500 ppm, humidity 40% - 95%. With 2 zero-potential relay contacts. Nominal voltage: 230 V~ Nominal current: 6 A cos ϕ = 1 Without claw fixation. To fit cover plate 6435-xxx.

Colour	Type	Order code	Pack/Qty.
	1091 U-500	2CKA001032A0518	1

Cover plate for rotary thermostat

Cover with button

Colour	Type	Order code	Pack/Qty.
white	**3292T-A00300 500**	2CHT910300A4500	5
black matt	**3292T-A00300 237**	2CHT910300A4237	5
white matt	**3292T-A00300 240**	2CHT910300A4240	5
grey	**3292T-A00300 241**	2CHT910300A4241	5
nude	**3292T-A00300 242**	2CHT910300A4242	5
olive	**3292T-A00300 243**	2CHT910300A4243	5
greige	**3292T-A00300 244**	2CHT910300A4244	5

Room Thermostat NEW

Electronic room thermostat, open contact, fm
Normally open contact, non-isolated
Switch contact opens when the set temperature is reached. Without fixing claws.
Separate terminal to activate eco mode to reduce the room temperature by 3K. See respective cover plates 1794 R-xx. Class of temperature controller 1
Contribution to space heating energy efficiency 1,0%.
Rated voltage: 230 V~. Power dissipation: ≤ 0,15 W
Rated current: 10 A. Temperature range (device): 5 °C - 30 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm. Protection class device: IP 20
Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete. Servo-valves, "de-energised open", are necessary for connection to thermostat. e.g. Article No. 6164/10-102. Switching temperature difference: ± 0.5 K

Colour	Type	Order code	Pack/Qty.
	1094 U-101-500	2CKA001032A0525	1/10
	1097 U-101-500	2CKA001032A0528	1/10
	1099 UHK-101-500	2CKA001032A0531	1/10

Zoni®

Room thermostats / Timers

Cover plate for digital room thermostat

Electronic Controls Various symbols
for Thermostat Central

Colour	Type	Order code	Pack/Qty.
white	**3292T-A00400 500**	2CHT910400A4500	5
black matt	**3292T-A00400 237**	2CHT910400A4237	5
white matt	**3292T-A00400 240**	2CHT910400A4240	5
grey	**3292T-A00400 241**	2CHT910400A4241	5
nude	**3292T-A00400 242**	2CHT910400A4242	5
olive	**3292T-A00400 243**	2CHT910400A4243	5
greige	**3292T-A00400 244**	2CHT910400A4244	5

Room thermostat insert with Setpoint display



Room temperature controller with integrated actuator output wireless connection and operating via free@home Next App
Use as a stand-alone controller or within the eco system with Busch-free@home®
Heating/cooling operation.
16A Switch-actuator output
Control element with room temperature controller function.
6-button touch-operation for on-site operation
Additional functions such as temperature adjustment and timer can be set via app.
With temperature display target value.
With integrated switching actuator, e.g. for controlling thermoelectric actuators in heating/cooling systems or electric underfloor heating.
RTR function is also available without prior programming (preconfigured).
The integrated RTR can optionally be equipped with a remote sensor in conjunction with temperature sensor 6226/T.
3-wire connection technology (neutral conductor required).
Programming/settings via the Busch-free@home® app next
Device access via app is via Bluetooth or wireless
Communication with the free@home system is wireless.
Matching central plate: 1794 MDRT-xx

Type	Order code	Pack/Qty.
62841 U-WL-500	2CKA006800A3115	

Room thermostat insert with Setpoint display

Sensor Unit with integrated RTR
Usable within the free@home® eco system
Heating/cooling mode.
Control element with room temperature controller function.
6-button touch control for on-site operation
Additional functions such as temperature adjustment and timer can be set via app.
With temperature display of set-point temperature
RTR function is also available without prior programming (preconfigured).
The integrated RTR can optionally be equipped with a remote sensor in conjunction with temperature sensor 6226/T.
3-wire connection technology (neutral conductor required).
Programming/settings via the Busch-free@home® app next
Device access via app is via Bluetooth or wireless
Communication with the free@home system is wireless.
Matching central plate: 1794 MDRT-xxx

Type	Order code	Pack/Qty.
62842 U-WL-500	2CKA006800A3117	

Room thermostat insert with Setpoint display

Room temperature controller with integrated actuator output wireless connection and operating via free@home Next App
Use as a stand-alone controller or within the eco system with Busch-free@home®
Heating/cooling operation.
electronic-actuator output
Control element with room temperature controller function.
6-button touch-operation for on-site operation
Additional functions such as temperature adjustment and timer can be set via app.
With temperature display target value.
With integrated switching actuator, e.g. for controlling thermoelectric actuators in heating/cooling systems or electric underfloor heating.
RTR function is also available without prior programming (preconfigured).
3-wire connection technology (neutral conductor required).
Programming/settings via the Busch-free@home® app next
Device access via app is via Bluetooth or wireless
Communication with the free@home system is wireless.
Matching central plate: 1794 MDRT-xxx

Type	Order code	Pack/Qty.
62843 U-WL-500	2CKA006800A3119	

Zoni®
Movement detectors

Control unit PIR, 180°

Colour	Type	Order code	Pack/Qty.
white	**3299T-A02182 500**	2CHT702182A4500	1
black matt	**3299T-A02182 237**	2CHT702182A4237	1
white matt	**3299T-A02182 240**	2CHT702182A4240	1
grey	**3299T-A02182 241**	2CHT702182A4241	1
nude	**3299T-A02182 242**	2CHT702182A4242	1
olive	**3299T-A02182 243**	2CHT702182A4243	1
greige	**3299T-A02182 244**	2CHT702182A4244	1

Relay switch for movement detector insert

For motion detectors Art. No. 3299H-A02182 ..
Operating temperature: -10 °C to +55 °C
2,300 V for incandescent lamps, 1,750 V for low-voltage halogen lamps with conventional or electronic transformers.
500 VA / 64 mFd for fluorescent lamps
3-wire connection
Nominal voltage: 230 V ~

	Type	Order code	Pack/Qty.
1x rele	**3299U-A00006**	2CHU700006A4000	1
2x rele	**3299U-A00007**	2CHU700007A4000	1
1x triak	**3299U-A00001**	2CHU700001A4000	1

Zoni®
Ilumination

LED illumination cover plate

Colour	Type	Order code	Pack/Qty.
white	**5016T-A00070 500**	2CHT160070A4500	5
black matt	**5016T-A00070 237**	2CHT160070A4237	5
white matt	**5016T-A00070 240**	2CHT160070A4240	5
grey	**5016T-A00070 241**	2CHT160070A4241	5
nude	**5016T-A00070 242**	2CHT160070A4242	5
olive	**5016T-A00070 243**	2CHT160070A4243	5
greige	**5016T-A00070 244**	2CHT160070A4244	5

LED illumination insert

Built-in depth: 25 mm
Screw-type terminals.
Nominal current: 10 mA
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
White	**3917U-A00050**	2CHU640050A4000	1
Blue	**3917U-A00051**	2CHU640051A4000	1
Green	**3917U-A00052**	2CHU640052A4000	1
Red	**3917U-A00053**	2CHU640053A4000	1

Indication and orientation LED illumination insert with infrapassive senzor

Installation depth: 25 mm
Screw-type terminals.
Fixation via screws only.
Switch-off delay: 1min
Threshold lighting : 10lx
12 mA, 230 V AC

Colour	Type	Order code	Pack/Qty.
White light	**3299U-A52500**	2CHU705250A4000	1

Zoni®
Illumination

Lighting insert LED, 0.5 mA

To provide orientation light for button switches and push-switches in the Levit range
The LED collar is red
Nominal current: 0.5 mA
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
White	**3916-05444**	2CHU165444C4000	10
Blue	**3916-05445**	2CHU165445C4000	10
Red	**3916-05443**	2CHU165443A4000	10

Lighting insert LED, 1 mA

To provide control light for button switches and push-switches in the Levit range
The LED collar is yellow
Nominal current: 0.5 mA
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
White	**3916-10444**	2CHU161444C4000	10

Blind cover

For communication insert mounting plates (Art. No. 5014H-A01018 ..)

Colour	Type	Order code	Pack/Qty.
white	**5014X-A01000 B**	2CHX291000A4500	
black	**5014X-A01000 N**	2CHX291000A4509	

Zoni®
Rocker switches / push switches

Rocker 1gang for f@h

Colour	Type	Order code	Pack/Qty.
white	**6620T-A01000 500**	2CHT621000A4500	5
black matt	**6620T-A01000 237**	2CHT621000A4237	5
white matt	**6620T-A01000 240**	2CHT621000A4240	5
grey	**6620T-A01000 241**	2CHT621000A4241	5
nude	**6620T-A01000 242**	2CHT621000A4242	5
olive	**6620T-A01000 243**	2CHT621000A4243	5
greige	**6620T-A01000 244**	2CHT621000A4244	5

Rocker 1gang for f@h, with blind icon

Colour	Type	Order code	Pack/Qty.
white	**6220T-A01002 500**	2CHT621002A4500	5
black matt	**6220T-A01002 237**	2CHT621002A4237	5
white matt	**6220T-A01002 240**	2CHT621002A4240	5
grey	**6220T-A01002 241**	2CHT621002A4241	5
nude	**6220T-A01002 242**	2CHT621002A4242	5
olive	**6220T-A01002 243**	2CHT621002A4243	5
greige	**6220T-A01002 244**	2CHT621002A4244	5

Rocker 1gang for f@h, with scene icon

Colour	Type	Order code	Pack/Qty.
white	**6620T-A01003 500**	2CHT621003A4500	5
black matt	**6220T-A01003 237**	2CHT621003A4237	5
white matt	**6220T-A01003 240**	2CHT621003A4240	5
grey	**6220T-A01003 241**	2CHT621003A4241	5
nude	**6220T-A01003 242**	2CHT621003A4242	5
olive	**6220T-A01003 243**	2CHT621003A4243	5
greige	**6220T-A01003 244**	2CHT621003A4244	5

Zoni®

Rocker switches / push switches

Rocker 2gang for f@h

Colour	Type	Order code	Pack/Qty.
white	**6620T-A02000 500**	2CHT622000A4500	5
black matt	**6220T-A02000 237**	2CHT622000A4237	5
white matt	**6220T-A02000 240**	2CHT622000A4240	5
grey	**6220T-A02000 241**	2CHT622000A4241	5
nude	**6220T-A02000 242**	2CHT622000A4242	5
olive	**6220T-A02000 243**	2CHT622000A4243	5
greige	**6220T-A02000 244**	2CHT622000A4244	5

Rocker 2gang right for f@h, with scene icon

Colour	Type	Order code	Pack/Qty.
white	**6620T-A22003 500**	2CHT622203A4500	5
black matt	**6220T-A22003 237**	2CHT622203A4237	5
white matt	**6220T-A22003 240**	2CHT622203A4240	5
grey	**6220T-A22003 241**	2CHT622203A4241	5
nude	**6220T-A22003 242**	2CHT622203A4242	5
olive	**6220T-A22003 243**	2CHT622203A4243	5
greige	**6220T-A22003 244**	2CHT622203A4244	5

Rocker 2gang rileft/right for f@h, with blind icon

Colour	Type	Order code	Pack/Qty.
white	**6620T-A02000 500**	2CHT622002A4500	5
black matt	**6220T-A02000 237**	2CHT622002A4237	5
white matt	**6220T-A02000 240**	2CHT622002A4240	5
grey	**6220T-A02000 241**	2CHT622002A4241	5
nude	**6220T-A02000 242**	2CHT622002A4242	5
olive	**6220T-A02000 243**	2CHT622002A4243	5
greige	**6220T-A02000 244**	2CHT622002A4244	5

Cover plate for room thermostat for f@h

Colour	Type	Order code	Pack/Qty.
white	**6620T-A03000 500**	2CHT623000A4500	5
black matt	**6220T-A03000 237**	2CHT623000A4237	5
white matt	**6220T-A03000 240**	2CHT623000A4240	5
grey	**6220T-A03000 241**	2CHT623000A4241	5
nude	**6220T-A03000 242**	2CHT623000A4242	5
olive	**6220T-A03000 243**	2CHT623000A4243	5
greige	**6220T-A03000 244**	2CHT623000A4244	5

Rocker 2gang left for f@h, with scene icon

Colour	Type	Order code	Pack/Qty.
white	**6620T-A02103 500**	2CHT622103A4500	5
black matt	**6220T-A21003 237**	2CHT622103A4237	5
white matt	**6220T-A21003 240**	2CHT622103A4240	5
grey	**6220T-A21003 241**	2CHT622103A4241	5
nude	**6220T-A21003 242**	2CHT622103A4242	5
olive	**6220T-A21003 243**	2CHT622103A4243	5
greige	**6220T-A21003 244**	2CHT622103A4244	5

Adapter Ring for 55x55mm

Colour	Type	Order code	Pack/Qty.
white	**3901T-B11 B**	2CHT010011B4500	5
black	**3901T-B11 N**	2CHT010011B4509	5

Freely programmable touch panel

Freely programmable touch panel 1 – up to 12 fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system.

Colour	Type	Order code	Pack/Qty.
black	**SD/U12.55.1-825**	2TMA310011B0001	1

Zoni®

ABB flexTronics inserts

Relay insert flex, 1gang [1)]

3 wire connection (neutral conductor required).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical. Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 2300 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Relay insert flex, 2gang [1)]

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... . For Busch-Watchdog 180 flex sensors 6476x-...
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical. Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

e-contact insert flex, 1gang [1)] [2)]

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1)] Use only dimmable high-voltage LEDs.
[2)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Zoni®

ABB flexTronics inserts

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6]
FM, LED, 3-240 VA

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi)
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x dimming channel
Suitable for: 230 V LEDi, typical (leading edge control)
Rated power: 3 - 100 VA
Suitable for:230 V LEDi, typical (trailing edge control)
Rated power: 3 - 240 W
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Extension insert flex [1]

3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations. For group control of flex inserts via extension unit communication.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with all flex inserts.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Control/Signal outputs: 1, electronic output, potential-bound. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Blind insert, 1 gang, 2 way flex

3 wire connection (neutral conductor required). For the control of roller shutters, blind and awning motors with mechanical or electronic limit switch shut-off. Group formation via extension input possible. Operation also via conventional push buttons (2020 US non-illuminated/2021/6 UK) possible. Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL.

Colour	Type	Order code	Pack/Qty.
	64831 U-500	2CKA006400A0096	1

Zoni®

ABB flexTronics movement detector sensors

Movement sensor, 180 flex, Basic Sensor with selected lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Compatible with all free@home flex inserts. Adjusting elements on rear side. Extension of the detection range by means of master/slave combination. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. Mounting height: 22 mm

Colour	Type	Order code	Pack/Qty.
white	**64761T-A64761 500**	2CKA006800A3202	1
white matt	**64761T-A64761 240**	2CKA006800A3203	1
grey	**64761T-A64761 241**	2CKA006800A3204	1
nude	**64761T-A64761 242**	2CKA006800A3205	1
olive	**64761T-A64761 243**	2CKA006800A3206	1
greige	**64761T-A64761 244**	2CKA006800A3207	1
black matt	**64761T-A64761 237**	2CKA006800A3208	1

Movement sensor, 180 flex, with selected-lens, wireless

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Works with free@home. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.

Colour	Type	Order code	Pack/Qty.
white	**62762T-A62762 500**	2CKA006200A0916	1
white matt	**62762T-A62762 240**	2CKA006200A0917	1
grey	**62762T-A62762 241**	2CKA006200A0918	1
nude	**62762T-A62762 242**	2CKA006200A0919	1
olive	**62762T-A62762 243**	2CKA006200A0920	1
greige	**62762T-A62762 244**	2CKA006200A0921	1
black matt	**62762T-A62762 237**	2CKA006200A0922	1

Movement sensor, 180 flex, with multi-lens

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Adjusting elements on rear side. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. Mounting height: 31 mm

Colour	Type	Order code	Pack/Qty.
white	**64764T-A64764 500**	2CKA006800A3209	1
white matt	**64764T-A64764 240**	2CKA006800A3210	1
grey	**64764T-A64764 241**	2CKA006800A3211	1
nude	**64764T-A64764 242**	2CKA006800A3212	1
olive	**64764T-A64764 243**	2CKA006800A3213	1
greige	**64764T-A64764 244**	2CKA006800A3214	1
black matt	**64764T-A64764 237**	2CKA006800A3215	1

Movement sensor, 180 flex, with multi-lens, wireless

Movement detector sensor with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.

Colour	Type	Order code	Pack/Qty.
white	**62764T-A62764 500**	2CKA006200A0923	1
white matt	**62764T-A62764 240**	2CKA006200A0924	1
grey	**62764T-A62764 241**	2CKA006200A0925	1
nude	**62764T-A62764 242**	2CKA006200A0926	1
olive	**62764T-A62764 243**	2CKA006200A0927	1
greige	**62764T-A62764 244**	2CKA006200A0928	1
black matt	**62764T-A62764 237**	2CKA006200A0929	1

Zoni®

ABB Free@home - inserts

free@home sensor/Dimmer actuator - 1/1-gang

For dimming 230 V~ loads. With integrated universal dimming actuator for controlling different lamps. The dimming function is available pre-configured.
Outputs: 1× dimming channel.
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformers.
Rated power: 10–180 W / VA.
Suitable for: LEDi and energy-saving bulbs.
Rated power: 2–80 W / VA.
Mounting depth: 32 mm.
To be installed with SR-1-85, SRL-1-85, SRD-1-85, SRB-1-85 and SRS-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SDA-F-1.1.1	2CKA006220A0126	1

free@home Sensor/Dimmer actuator - 2/1-gang

For dimming 230 V~ loads. With integrated universal dimming actuator for controlling different lamps. The dimming function is available pre-configured
Outputs: 1× dimming channel.
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformers.
Rated power: 10–180 W / VA.
Suitable for: LEDi and energy-saving bulbs.
Rated power: 2–80 W / VA.
Mounting depth: 32 mm.
To be installed with SR-2-85, SRL-2-L-85 SRL-2-R-85, SRD-2-L-85, SRD-2-R-85, SRB-2-85 SRS-2-L-85 and SRS-2-R-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SDA-F-2.1.1	2CKA006220A0127	1

free@home Sensor/Blind actuator - 1/1-gang

For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured.
Outputs: 1× Change-over contacts/normally open contact, potential-bound.
Rated power: 920 VA.
Rated current: 4 A.
Suitable for: Operating mode blind.
Mounting depth: 32 mm.
To be installed with SR-1-85, SRL-1-85, SRD-1-85, SRB-1-85 and SRS-1-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SBA-F-1.1.1	2CKA006220A0128	1

free@home Sensor/Blind actuator - 2/1-gang

For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured.
Outputs: 1× Change-over contacts/normally open contact, potential-bound.
Rated power: 920 VA.
Rated current: 4 A.
Suitable for: Operating mode blind.
Mounting depth: 32 mm.
To be installed with SR-2-85, SRL-2-L-85 SRL-2-R-85, SRD-2-L-85, SRD-2-R-85, SRB-2-85 SRS-2-L-85 and SRS-2-R-85 cover plates.

Colour	Type	Order code	Pack/Qty.
	SBA-F-2.1.1	2CKA006220A0129	1

Control element, 1 gang flex

Tapping control element, 1gang. Compatible with all free@home flex inserts. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64711-500	2CKA006400A0099	1

Control element, 1 gang, flex wireless

Tapping control element, 1gang. For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62711-WL-500	2CKA006200A0281	1

Control element, 2 gang flex

Tapping control element, 2gang For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	64721-500	2CKA006400A0101	1

Control element, 1 gang, flex wireless

Tapping control element, 2gang For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all free@home flex inserts. Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U. For series relay insert flex, 2gang, 64821 U. For e-contact insert flex, 1gang, 64814 U. For LED touch dimmer insert flex, 1gang, 64851 U. For extension insert flex, 64891 U. For blind insert flex, 1gang, 64831 U.

Colour	Type	Order code	Pack/Qty.
	62721-WL-500	2CKA006200A0283	1

Zoni®
Frames

Cover frame 1gang

Colour	Type	Order code	Pack/Qty.
white	**3901T-A00010 500**	2CHT010010A6500	20
white matt	**3901T-A00010 240**	2CHT010010A6240	20
black matt	**3901T-A00010 237**	2CHT010010A6237	20
black matt / white	**3901T-A00010 137**	2CHT010010A6137	20
grey / whit	**3901T-A00010 141**	2CHT010010A6141	20
nude / white	**3901T-A00010 142**	2CHT010010A6142	20
olive / white	**3901T-A00010 143**	2CHT010010A6143	20
greige / white	**3901T-A00010 144**	2CHT010010A6144	20

Cover frame 2gang

Colour	Type	Order code	Pack/Qty.
white	**3901T-A00020 500**	2CHT010020A6500	30
white matt	**3901T-A00020 240**	2CHT010020A6240	30
black matt	**3901T-A00020 237**	2CHT010020A6237	30
black matt / white	**3901T-A00020 137**	2CHT010020A6137	30
grey / whit	**3901T-A00020 141**	2CHT010020A6141	30
nude / white	**3901T-A00020 142**	2CHT010020A6142	30
olive / white	**3901T-A00020 143**	2CHT010020A6143	30
greige / white	**3901T-A00020 144**	2CHT010020A6144	30

Cover frame 3gang

Colour	Type	Order code	Pack/Qty.
white	**3901T-A00030 500**	2CHT010030A6500	15
white matt	**3901T-A00030 240**	2CHT010030A6240	15
black matt	**3901T-A00030 237**	2CHT010030A6237	15
black matt / white	**3901T-A00030 137**	2CHT010030A6137	15
grey / whit	**3901T-A00030 141**	2CHT010030A6141	15
nude / white	**3901T-A00030 142**	2CHT010030A6142	15
olive / white	**3901T-A00030 143**	2CHT010030A6143	15
greige / white	**3901T-A00030 144**	2CHT010030A6144	15

Cover frame 4gang

Colour	Type	Order code	Pack/Qty.
white	**3901T-A00040 500**	2CHT010040A6500	15
white matt	**3901T-A00040 240**	2CHT010040A6240	15
black matt	**3901T-A00040 237**	2CHT010040A6237	15
black matt / white	**3901T-A00040 137**	2CHT010040A6137	15
grey / whit	**3901T-A00040 141**	2CHT010040A6141	15
nude / white	**3901T-A00040 142**	2CHT010040A6142	15
olive / white	**3901T-A00040 143**	2CHT010040A6143	15
greige / white	**3901T-A00040 144**	2CHT010040A6144	15

Cover frame 5gang

Colour	Type	Order code	Pack/Qty.
white	**3901T-A00050 500**	2CHT010050A6500	15
white matt	**3901T-A00050 240**	2CHT010050A6240	15
black matt	**3901T-A00050 237**	2CHT010050A6237	15
black matt / white	**3901T-A00050 137**	2CHT010050A6137	15
grey / whit	**3901T-A00050 141**	2CHT010050A6141	15
nude / white	**3901T-A00050 142**	2CHT010050A6142	15
olive / white	**3901T-A00050 143**	2CHT010050A6143	15
greige / white	**3901T-A00050 144**	2CHT010050A6144	15

Notes

Levit®
Go bright

The Levit® collection will perfectly fit into any modern home. Clear straight lines, the timeless shape of the square, the ideal proportions of the button and frame, and the striking contrast of the two-piece base. Levit®M extendends the range with cool metalic shades, which reflect the current trends in world design.

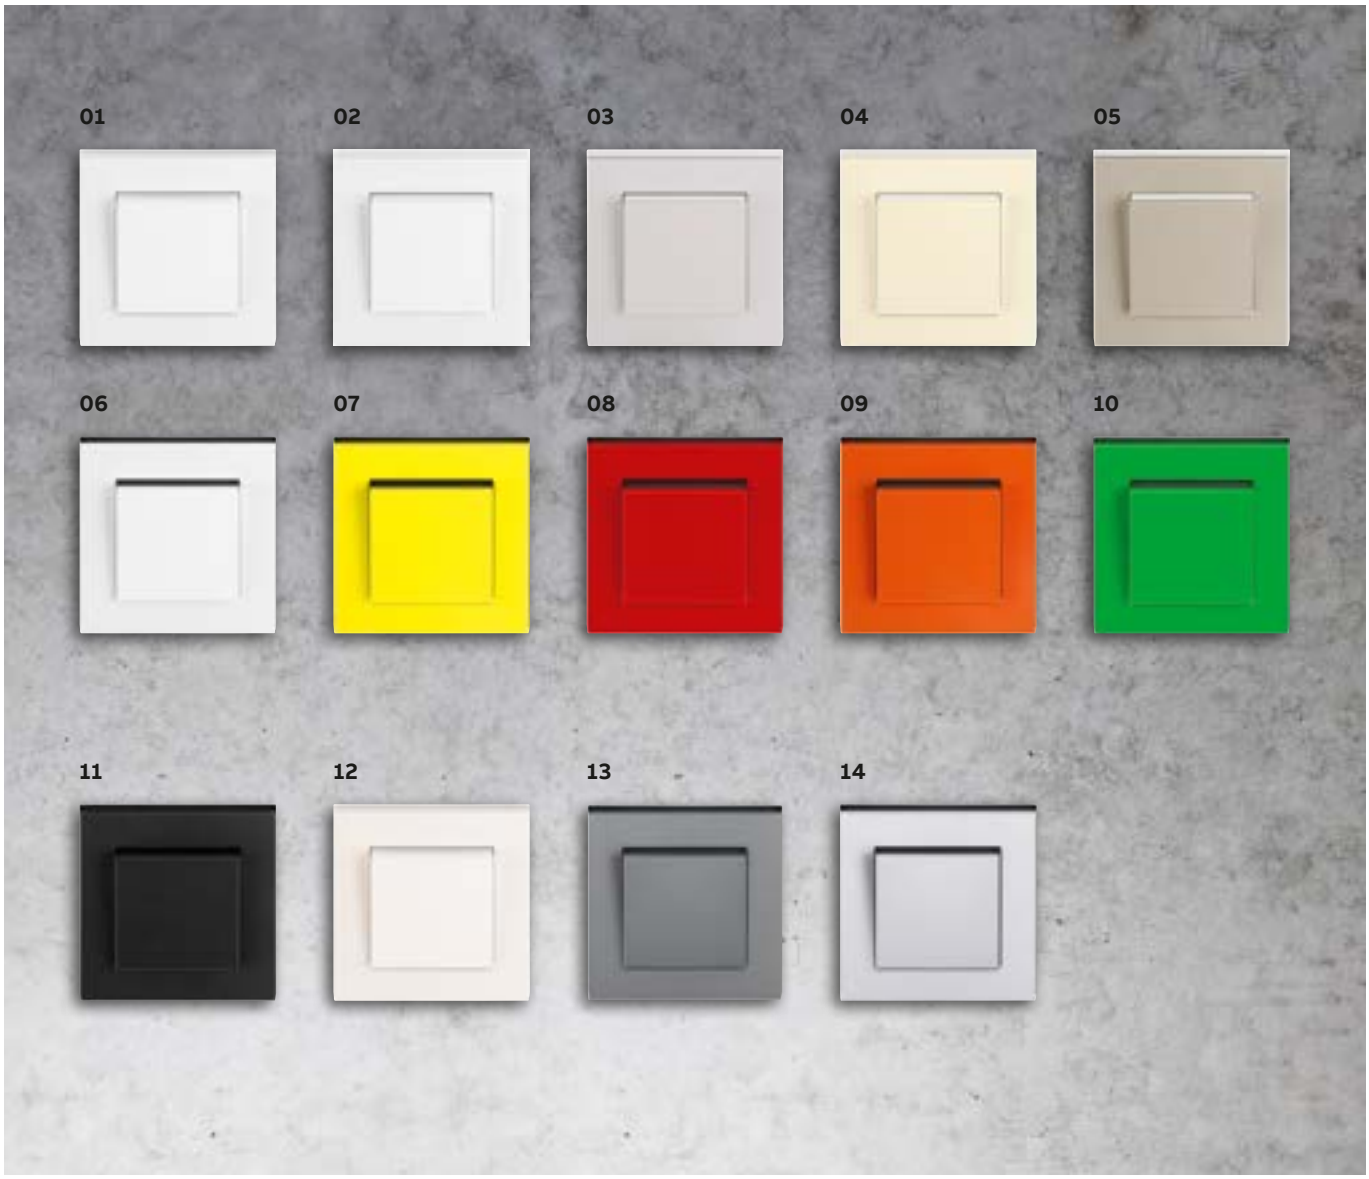

01 White / Ice white
02 White / White
03 Grey / White
04 Ivory / White
05 Macchiato / White
06 White / Smoke black
07 Yellow / Smoke black
08 Red / Smoke black
09 Orange / Smoke black
10 Green / Smoke black
11 Anthracite / Smoke Black
12 Pearl / Ice White
13 Steel / Smoke black
14 Silver / Smoke black

Levit®

Standard inserts

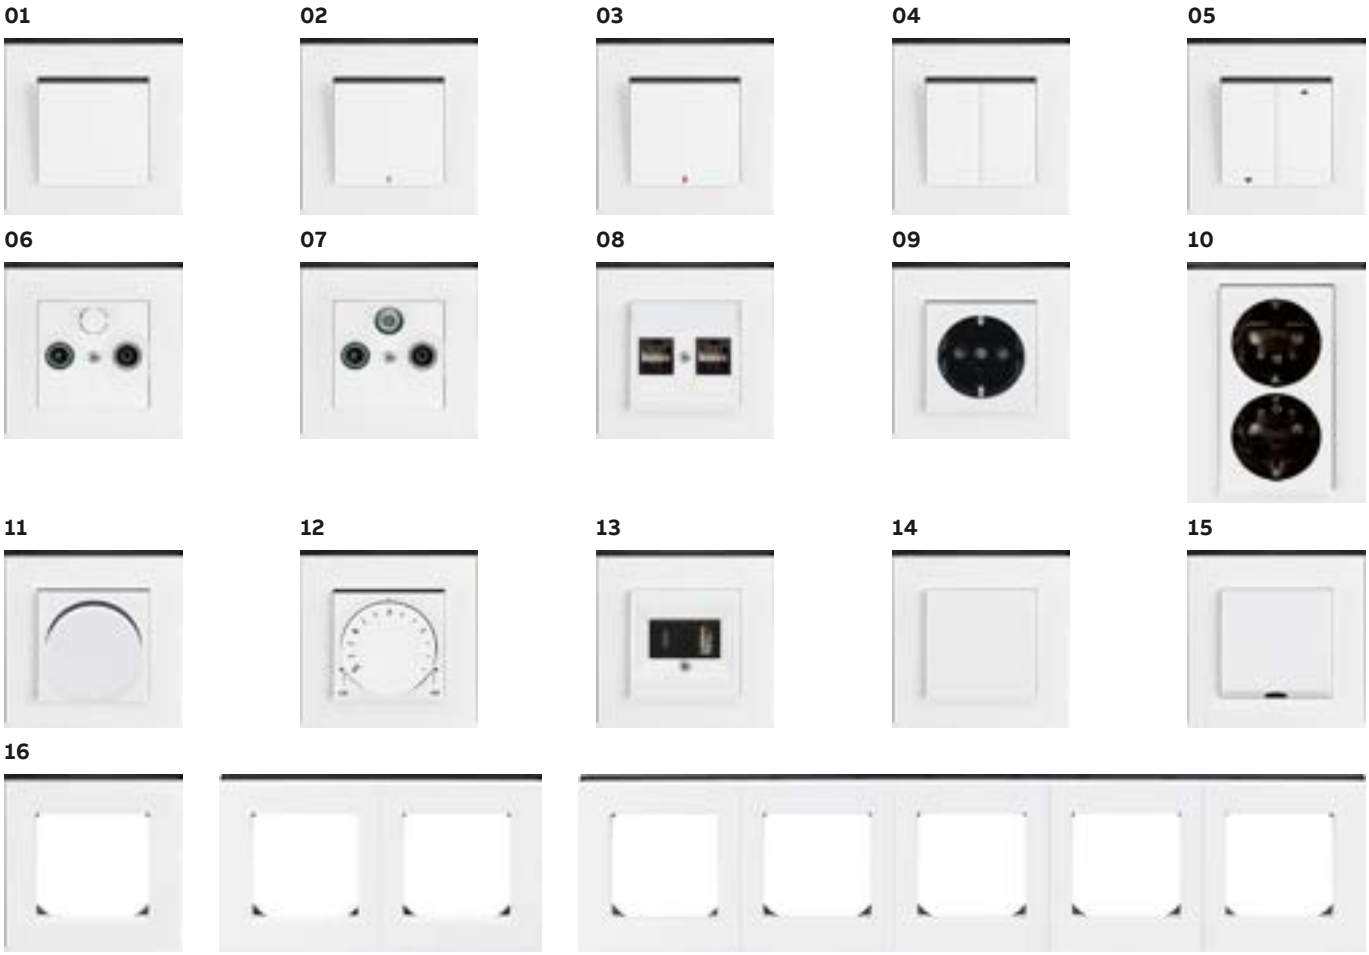

A basic product consists of a practical 2-piece (insert and cover plate, frame) and individual packaging.

Switches, one- or two-way, push-switches	01 Switch (one- or two-way) 02 Switch (one- or two-way) with orientation light 03 Switch (two-way) with indicator light 04 Switch (one- or two-way), two circuits 05 Blind switch with / without locking keys
Telecommunications	06 Connection unit TV-R 07 Connection unit TV-R-SAT 08 Data socket outlet RJ45 (for one or two jacks)
Connection units	09 SCHUKO socket outlet, shuttered 10 Double SCHUKO socket outlet, shuttered
Electronics Blind covers, frames	11 Rotary dimmer, 60-600W 12 Thermostat with rotary temperature setting, 16A 13 USB charge 14 Blind cover 15 Cable outlet 16 Frames, one to five gang* (universal for horizontal or vertical mounting) * Compatible with standard Levit® inserts (50×50)

Levit®
Switches

Push-switch, 1gang one-way

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 10 AX
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A01445 01W**	2CHH590145A6001	15
White/White	**3559H-A01445 03W**	2CHH590145A6003	15
Grey/White	**3559H-A01445 16W**	2CHH590145A6016	15
Ivory/White	**3559H-A01445 17W**	2CHH590145A6017	15
Macchiato/White	**3559H-A01445 18W**	2CHH590145A6018	15
White/ Smoke black	**3559H-A01445 62W**	2CHH590145A6062	15
Anthracite/ Smoke Black	**3559H-A01445 63W**	2CHH590145A6063	15
Yellow/ Smoke black	**3559H-A01445 64W**	2CHH590145A6064	15
Red/ Smoke black	**3559H-A01445 65W**	2CHH590145A6065	15
Orange/ Smoke black	**3559H-A01445 66W**	2CHH590145A6066	15
Green/ Smoke black	**3559H-A01445 67W**	2CHH590145A6067	15
Pearl/ Ice White	**3559H-A01445 68W**	2CHH590145A6068	15
Steel/ Smoke black	**3559H-A01445 69W**	2CHH590145A6069	15
Silver/ Smoke black	**3559H-A01445 70W**	2CHH590145A6070	15

Switch one-way with light

Individual packaging for retail
Nominal voltage: 250 V ~. Nominal current: 10 AX
White LED orientation light
Nominal current of orientation light: 0,5 mA
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A01446 01W**	2CHH590146A6001	15
White/White	**3559H-A01446 03W**	2CHH590146A6003	15
Grey/White	**3559H-A01446 16W**	2CHH590146A6016	15
Ivory/White	**3559H-A01446 17W**	2CHH590146A6017	15
Macchiato/White	**3559H-A01446 18W**	2CHH590146A6018	15
White/ Smoke black	**3559H-A01446 62W**	2CHH590146A6062	15
Anthracite/ Smoke Black	**3559H-A01446 63W**	2CHH590146A6063	15
Yellow/ Smoke black	**3559H-A01446 64W**	2CHH590146A6064	15
Red/ Smoke black	**3559H-A01446 65W**	2CHH590146A6065	15
Orange/ Smoke black	**3559H-A01446 66W**	2CHH590146A6066	15
Green/ Smoke black	**3559H-A01446 67W**	2CHH590146A6067	15
Pearl/ Ice White	**3559H-A01446 68W**	2CHH590146A6068	15
Steel/ Smoke black	**3559H-A01446 69W**	2CHH590146A6069	15
Silver/ Smoke black	**3559H-A01446 70W**	2CHH590146A6070	15

Switch (connection type 6)

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 10 AX
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A06445 01W**	2CHH590645A6001	15
White/White	**3559H-A06445 03W**	2CHH590645A6003	15
Grey/White	**3559H-A06445 16W**	2CHH590645A6016	15
Ivory/White	**3559H-A06445 17W**	2CHH590645A6017	15
Macchiato/White	**3559H-A06445 18W**	2CHH590645A6018	15
White/ Smoke black	**3559H-A06445 62W**	2CHH590645A6062	15
Anthracite/ Smoke Black	**3559H-A06445 63W**	2CHH590645A6063	15
Yellow/ Smoke black	**3559H-A06445 64W**	2CHH590645A6064	15
Red/ Smoke black	**3559H-A06445 65W**	2CHH590645A6065	15
Orange/ Smoke black	**3559H-A06445 66W**	2CHH590645A6066	15
Green/ Smoke black	**3559H-A06445 67W**	2CHH590645A6067	15
Pearl/ Ice White	**3559H-A06445 68W**	2CHH590645A6068	15
Steel/ Smoke black	**3559H-A06445 69W**	2CHH590645A6069	15
Silver/ Smoke black	**3559H-A06445 70W**	2CHH590645A6070	15

Switch, 1gang two-way with orientation light (connection type 6)

Individual packaging for retail
Nominal voltage: 250 V ~. Nominal current: 10 AX
White LED orientation light
Nominal current of orientation light: 0,5 mA
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A06446 01W**	2CHH590646A6001	15
White/White	**3559H-A06446 03W**	2CHH590646A6003	15
Grey/White	**3559H-A06446 16W**	2CHH590646A6016	15
Ivory/White	**3559H-A06446 17W**	2CHH590646A6017	15
Macchiato/White	**3559H-A06446 18W**	2CHH590646A6018	15
White/ Smoke black	**3559H-A06446 62W**	2CHH590646A6062	15
Anthracite/ Smoke Black	**3559H-A06446 63W**	2CHH590646A6063	15
Yellow/ Smoke black	**3559H-A06446 64W**	2CHH590646A6064	15
Red/ Smoke black	**3559H-A06446 65W**	2CHH590646A6065	15
Orange/ Smoke black	**3559H-A06446 66W**	2CHH590646A6066	15
Green/ Smoke black	**3559H-A06446 67W**	2CHH590646A6067	15
Pearl/ Ice White	**3559H-A06446 68W**	2CHH590646A6068	15
Steel/ Smoke black	**3559H-A06446 69W**	2CHH590646A6069	15
Silver/ Smoke black	**3559H-A06446 70W**	2CHH590646A6070	15

Levit®
Switches

Switch, 1gang two-way with control light (connection type 6)

Individual packaging for retail
Nominal voltage: 250 V ~. Nominal current: 10 AX
Red LED control light
Nominal current of orientation light: 1 mA
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A25445 01W**	2CHH592545A6001	15
White/White	**3559H-A25445 03W**	2CHH592545A6003	15
Grey/White	**3559H-A25445 16W**	2CHH592545A6016	15
Ivory/White	**3559H-A25445 17W**	2CHH592545A6017	15
Macchiato/White	**3559H-A25445 18W**	2CHH592545A6018	15
White/ Smoke black	**3559H-A25445 62W**	2CHH592545A6062	15
Anthracite/ Smoke Black	**3559H-A25445 63W**	2CHH592545A6063	15
Yellow/ Smoke black	**3559H-A25445 64W**	2CHH592545A6064	15
Red/ Smoke black	**3559H-A25445 65W**	2CHH592545A6065	15
Orange/ Smoke black	**3559H-A25445 66W**	2CHH592545A6066	15
Green/ Smoke black	**3559H-A25445 67W**	2CHH592545A6067	15
Pearl/ Ice White	**3559H-A25445 68W**	2CHH592545A6068	15
Steel/ Smoke black	**3559H-A25445 69W**	2CHH592545A6069	15
Silver/ Smoke black	**3559H-A25445 70W**	2CHH592545A6070	15

Switch intermediate 1gang (connection type 7)

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 10 AX
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A07445 01W**	2CHH590745A6001	15
White/White	**3559H-A07445 03W**	2CHH590745A6003	15
Grey/White	**3559H-A07445 16W**	2CHH590745A6016	15
Ivory/White	**3559H-A07445 17W**	2CHH590745A6017	15
Macchiato/White	**3559H-A07445 18W**	2CHH590745A6018	15
White/ Smoke black	**3559H-A07445 62W**	2CHH590745A6062	15
Anthracite/ Smoke Black	**3559H-A07445 63W**	2CHH590745A6063	15
Yellow/ Smoke black	**3559H-A07445 64W**	2CHH590745A6064	15
Red/ Smoke black	**3559H-A07445 65W**	2CHH590745A6065	15
Orange/ Smoke black	**3559H-A07445 66W**	2CHH590745A6066	15
Green/ Smoke black	**3559H-A07445 67W**	2CHH590745A6067	15
Pearl/ Ice White	**3559H-A07445 68W**	2CHH590745A6068	15
Steel/ Smoke black	**3559H-A07445 69W**	2CHH590745A6069	15
Silver/ Smoke black	**3559H-A07445 70W**	2CHH590745A6070	15

Push-button, 1gang one-way

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 10 A
NO contact. Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A91445 01W**	2CHH599145A6001	15
White/White	**3559H-A91445 03W**	2CHH599145A6003	15
Grey/White	**3559H-A91445 16W**	2CHH599145A6016	15
Ivory/White	**3559H-A91445 17W**	2CHH599145A6017	15
Macchiato/White	**3559H-A91445 18W**	2CHH599145A6018	15
White/ Smoke black	**3559H-A91445 62W**	2CHH599145A6062	15
Anthracite/ Smoke Black	**3559H-A91445 63W**	2CHH599145A6063	15
Yellow/ Smoke black	**3559H-A91445 64W**	2CHH599145A6064	15
Red/ Smoke black	**3559H-A91445 65W**	2CHH599145A6065	15
Orange/ Smoke black	**3559H-A91445 66W**	2CHH599145A6066	15
Green/ Smoke black	**3559H-A91445 67W**	2CHH599145A6067	15
Pearl/ Ice White	**3559H-A91445 68W**	2CHH599145A6068	15
Steel/ Smoke black	**3559H-A91445 69W**	2CHH599145A6069	15
Silver/ Smoke black	**3559H-A91445 70W**	2CHH599145A6070	15

Push switch, 1gang one-way with LED lamp

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 10 A
NO contact. White LED orientation light
Nominal current of orientation light: 0,5 mA
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A91447 01W**	2CHH599147A6001	15
White/White	**3559H-A91447 03W**	2CHH599147A6003	15
Grey/White	**3559H-A91447 16W**	2CHH599147A6016	15
Ivory/White	**3559H-A91447 17W**	2CHH599147A6017	15
Macchiato/White	**3559H-A91447 18W**	2CHH599147A6018	15
White/ Smoke black	**3559H-A91447 62W**	2CHH599147A6062	15
Anthracite/ Smoke Black	**3559H-A91447 63W**	2CHH599147A6063	15
Yellow/ Smoke black	**3559H-A91447 64W**	2CHH599147A6064	15
Red/ Smoke black	**3559H-A91447 65W**	2CHH599147A6065	15
Orange/ Smoke black	**3559H-A91447 66W**	2CHH599147A6066	15
Green/ Smoke black	**3559H-A91447 67W**	2CHH599147A6067	15
Pearl/ Ice White	**3559H-A91447 68W**	2CHH599147A6068	15
Steel/ Smoke black	**3559H-A91447 69W**	2CHH599147A6069	15
Silver/ Smoke black	**3559H-A91447 70W**	2CHH599147A6070	15

Levit®
Switches

Switch 1gang (connection type 6)

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 10 A
NO contact
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A86445 01W**	2CHH598645A6001	15
White/White	**3559H-A86445 03W**	2CHH598645A6003	15
Grey/White	**3559H-A86445 16W**	2CHH598645A6016	15
Ivory/White	**3559H-A86445 17W**	2CHH598645A6017	15
Macchiato/White	**3559H-A86445 18W**	2CHH598645A6018	15
White/ Smoke black	**3559H-A86445 62W**	2CHH598645A6062	15
Anthracite/ Smoke Black	**3559H-A86445 63W**	2CHH598645A6063	15
Yellow/ Smoke black	**3559H-A86445 64W**	2CHH598645A6064	15
Red/ Smoke black	**3559H-A86445 65W**	2CHH598645A6065	15
Orange/ Smoke black	**3559H-A86445 66W**	2CHH598645A6066	15
Green/ Smoke black	**3559H-A86445 67W**	2CHH598645A6067	15
Pearl/ Ice White	**3559H-A86445 68W**	2CHH598645A6068	15
Steel/ Smoke black	**3559H-A86445 69W**	2CHH598645A6069	15
Silver/ Smoke black	**3559H-A86445 70W**	2CHH598645A6070	15

Switch, two-pole, 1gang one-way

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 10 A
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A02445 01W**	2CHH590245A6001	15
White/White	**3559H-A02445 03W**	2CHH590245A6003	15
Grey/White	**3559H-A02445 16W**	2CHH590245A6016	15
Ivory/White	**3559H-A02445 17W**	2CHH590245A6017	15
Macchiato/White	**3559H-A02445 18W**	2CHH590245A6018	15
White/ Smoke black	**3559H-A02445 62W**	2CHH590245A6062	15
Anthracite/ Smoke Black	**3559H-A02445 63W**	2CHH590245A6063	15
Yellow/ Smoke black	**3559H-A02445 64W**	2CHH590245A6064	15
Red/ Smoke black	**3559H-A02445 65W**	2CHH590245A6065	15
Orange/ Smoke black	**3559H-A02445 66W**	2CHH590245A6066	15
Green/ Smoke black	**3559H-A02445 67W**	2CHH590245A6067	15
Pearl/ Ice White	**3559H-A02445 68W**	2CHH590245A6068	15
Steel/ Smoke black	**3559H-A02445 69W**	2CHH590245A6069	15
Silver/ Smoke black	**3559H-A02445 70W**	2CHH590245A6070	15

Switch, 2gang one-way

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 10 AX
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A05445 01W**	2CHH590545A6001	15
White/White	**3559H-A05445 03W**	2CHH590545A6003	15
Grey/White	**3559H-A05445 16W**	2CHH590545A6016	15
Ivory/White	**3559H-A05445 17W**	2CHH590545A6017	15
Macchiato/White	**3559H-A05445 18W**	2CHH590545A6018	15
White/ Smoke black	**3559H-A05445 62W**	2CHH590545A6062	15
Anthracite/ Smoke Black	**3559H-A05445 63W**	2CHH590545A6063	15
Yellow/ Smoke black	**3559H-A05445 64W**	2CHH590545A6064	15
Red/ Smoke black	**3559H-A05445 65W**	2CHH590545A6065	15
Orange/ Smoke black	**3559H-A05445 66W**	2CHH590545A6066	15
Green/ Smoke black	**3559H-A05445 67W**	2CHH590545A6067	15
Pearl/ Ice White	**3559H-A05445 68W**	2CHH590545A6068	15
Steel/ Smoke black	**3559H-A05445 69W**	2CHH590545A6069	15
Silver/ Smoke black	**3559H-A05445 70W**	2CHH590545A6070	15

Switch, 2gang one-way (connection type 6)

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 10 AX
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A52445 01W**	2CHH595245A6001	15
White/White	**3559H-A52445 03W**	2CHH595245A6003	15
Grey/White	**3559H-A52445 16W**	2CHH595245A6016	15
Ivory/White	**3559H-A52445 17W**	2CHH595245A6017	15
Macchiato/White	**3559H-A52445 18W**	2CHH595245A6018	15
White/ Smoke black	**3559H-A52445 62W**	2CHH595245A6062	15
Anthracite/ Smoke Black	**3559H-A52445 63W**	2CHH595245A6063	15
Yellow/ Smoke black	**3559H-A52445 64W**	2CHH595245A6064	15
Red/ Smoke black	**3559H-A52445 65W**	2CHH595245A6065	15
Orange/ Smoke black	**3559H-A52445 66W**	2CHH595245A6066	15
Green/ Smoke black	**3559H-A52445 67W**	2CHH595245A6067	15
Pearl/ Ice White	**3559H-A52445 68W**	2CHH595245A6068	15
Steel/ Smoke black	**3559H-A52445 69W**	2CHH595245A6069	15
Silver/ Smoke black	**3559H-A52445 70W**	2CHH595245A6070	15

Levit®
Switches

Switch, 2gang one-way

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 10 A
NO contact
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A87445 01W**	2CHH598745A6001	15
White/White	**3559H-A87445 03W**	2CHH598745A6003	15
Grey/White	**3559H-A87445 16W**	2CHH598745A6016	15
Ivory/White	**3559H-A87445 17W**	2CHH598745A6017	15
Macchiato/White	**3559H-A87445 18W**	2CHH598745A6018	15
White/ Smoke black	**3559H-A87445 62W**	2CHH598745A6062	15
Anthracite/ Smoke Black	**3559H-A87445 63W**	2CHH598745A6063	15
Yellow/ Smoke black	**3559H-A87445 64W**	2CHH598745A6064	15
Red/ Smoke black	**3559H-A87445 65W**	2CHH598745A6065	15
Orange/ Smoke black	**3559H-A87445 66W**	2CHH598745A6066	15
Green/ Smoke black	**3559H-A87445 67W**	2CHH598745A6067	15
Pearl/ Ice White	**3559H-A87445 68W**	2CHH598745A6068	15
Steel/ Smoke black	**3559H-A87445 69W**	2CHH598745A6069	15
Silver/ Smoke black	**3559H-A87445 70W**	2CHH598745A6070	15

Switch with rocker 3gang 1way, SP

Individual packaging
Fixation via screw or claws
Nominal voltage: 250 V
Nominal current: 10A

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A03445 01W**	2CHH590345A6001	10
White/White	**3559H-A03445 03W**	2CHH590345A6003	10
Grey/White	**3559H-A03445 16W**	2CHH590345A6016	10
Ivory/White	**3559H-A03445 17W**	2CHH590345A6017	10
Macchiato/White	**3559H-A03445 18W**	2CHH590345A6018	10
White/ Smoke black	**3559H-A03445 62W**	2CHH590345A6062	10
Anthracite/ Smoke Black	**3559H-A03445 63W**	2CHH590345A6063	10
Yellow/ Smoke black	**3559H-A03445 64W**	2CHH590345A6064	10
Red/Smoke black	**3559H-A03445 65W**	2CHH590345A6065	10
Orange/ Smoke black	**3559H-A03445 66W**	2CHH590345A6066	10
Green/ Smoke black	**3559H-A03445 67W**	2CHH590345A6067	10
Pearl/Ice White	**3559H-A03445 68W**	2CHH590345A6068	10
Steel/ Smoke black	**3559H-A03445 69W**	2CHH590345A6069	10
Silver/ Smoke black	**3559H-A03445 70W**	2CHH590345A6070	10

Card switch insert

for panels Art. No. 3559H-A00700 ..
Mode of operation: mechanical
Suitable for 54 x 86 mm cards
Suitable for illumination
Orientation light effected through LED light units
Art. No. 3916-05444 - white
Art. No. 3916-05445 - red
Art. No. 3916-05443 - blue
Nominal voltage: 250 V ~
Nominal current: 10 A
Screwless terminals

Colour	Type	Order code	Pack/Qty.
	3559-A92445	2CHX599245A4000	10

Switch two-way and push-switch + two-way retractive

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 10 A
Two-way switch, connection type 6
+ NO contact push-switch
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A53445 01W**	2CHH595345A6001	15
White/White	**3559H-A53445 03W**	2CHH595345A6003	15
Grey/White	**3559H-A53445 16W**	2CHH595345A6016	15
Ivory/White	**3559H-A53445 17W**	2CHH595345A6017	15
Macchiato/White	**3559H-A53445 18W**	2CHH595345A6018	15
White/ Smoke black	**3559H-A53445 62W**	2CHH595345A6062	15
Anthracite/ Smoke Black	**3559H-A53445 63W**	2CHH595345A6063	15
Yellow/ Smoke black	**3559H-A53445 64W**	2CHH595345A6064	15
Red/ Smoke black	**3559H-A53445 65W**	2CHH595345A6065	15
Orange/ Smoke black	**3559H-A53445 66W**	2CHH595345A6066	15
Green/ Smoke black	**3559H-A53445 67W**	2CHH595345A6067	15
Pearl/ Ice White	**3559H-A53445 68W**	2CHH595345A6068	15
Steel/ Smoke black	**3559H-A53445 69W**	2CHH595345A6069	15
Silver/ Smoke black	**3559H-A53445 70W**	2CHH595345A6070	15

Levit®
Switches

Card switch cover plate

For card switch insert
(Art. No. 3559-A92445)

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A00700 01**	2CHH590700A4001	20
White/White	**3559H-A00700 03**	2CHH590700A4003	20
Grey/White	**3559H-A00700 16**	2CHH590700A4016	20
Ivory/White	**3559H-A00700 17**	2CHH590700A4017	20
Macchiato/White	**3559H-A00700 18**	2CHH590700A4018	20
White/ Smoke black	**3559H-A00700 62**	2CHH590700A4062	20
Anthracite/ Smoke Black	**3559H-A00700 63**	2CHH590700A4063	20
Yellow/ Smoke black	**3559H-A00700 64**	2CHH590700A4064	20
Red/ Smoke black	**3559H-A00700 65**	2CHH590700A4065	20
Orange/ Smoke black	**3559H-A00700 66**	2CHH590700A4066	20
Green/ Smoke black	**3559H-A00700 67**	2CHH590700A4067	20
Pearl/ Ice White	**3559H-A00700 68**	2CHH590700A4068	20
Steel/ Smoke black	**3559H-A00700 69**	2CHH590700A4069	20
Silver/ Smoke black	**3559H-A00700 70**	2CHH590700A4070	20

Levit®
Switches one- / two-way IP44

Switch, 1gang two-way IP44 (connection type 6)

Nominal voltage: 250 V ~
Nominal current: 10 AX
Screwless terminals
Degree of moisture protection: IP44
Compatible with standard Levit frames
1gang to 3gang (Art. No. 3901H-A050..0 ..)

Colour	Type	Order code	Pack/Qty.
White/White	**3559H-A06940 03**	2CHH596940A4003	15
Macchiato/White	**3559H-A06940 18**	2CHH596940A4018	15
White/ Smoke black	**3559H-A06940 62**	2CHH596940A4062	15
Anthracite/ Smoke Black	**3559H-A06940 63**	2CHH596940A4063	15
Silver/ Smoke black	**3559H-A06940 70**	2CHH596940A4070	15

Switch, 1gang two-way IP44 (connection type 6)

Nominal voltage: 250 V ~
Nominal current: 10 AX
Screwless terminals
Degree of moisture protection: IP44
Compatible with standard Levit frames
1gang to 3gang (Art. No. 3901H-A050..0 ..)

Colour	Type	Order code	Pack/Qty.
White/White	**3559H-A06940 03**	2CHH596940A4003	15
Macchiato/White	**3559H-A06940 18**	2CHH596940A4018	15
White/ Smoke black	**3559H-A06940 62**	2CHH596940A4062	15
Anthracite/ Smoke Black	**3559H-A06940 63**	2CHH596940A4063	15
Silver/ Smoke black	**3559H-A06940 70**	2CHH596940A4070	15

Switch intermediate
1gang two-way IP44 (connection type 7)

Nominal voltage: 250 V ~
Nominal current: 10 AX
Screwless terminals
Degree of moisture protection: IP44
Compatible with standard Levit frames
1gang to 3gang (Art. No. 3901H-A050..0 ..)

Colour	Type	Order code	Pack/Qty.
White/White	**3559H-A07940 03**	2CHH597940A4003	15
Macchiato/White	**3559H-A07940 18**	2CHH597940A4018	15
White/ Smoke black	**3559H-A07940 62**	2CHH597940A4062	15
Anthracite/ Smoke Black	**3559H-A07940 63**	2CHH597940A4063	15
Silver/ Smoke black	**3559H-A07940 70**	2CHH597940A4070	15

Switch, 2gang two-way IP44

Nominal voltage: 250 V ~
Nominal current: 10 AX
Screwless terminals
Degree of moisture protection: IP44
Compatible with standard Levit frames
1gang to 3gang (Art. No. 3901H-A050..0 ..)

Colour	Type	Order code	Pack/Qty.
White/White	**3559H-A05940 03**	2CHH595940A4003	15
Macchiato/White	**3559H-A05940 18**	2CHH595940A4018	15
White/ Smoke black	**3559H-A05940 62**	2CHH595940A4062	15
Anthracite/ Smoke Black	**3559H-A05940 63**	2CHH595940A4063	15
Silver/ Smoke black	**3559H-A05940 70**	2CHH595940A4070	15

Levit®
Socket outlets

SCHUKO socket outlet, shuttered

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 16 A
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/ Ice white	**6620H-A07457 01**	2CHH207457A4001	14
White/ White	**6620H-A07457 03**	2CHH207457A4003	14
Grey/ White	**6620H-A07457 16**	2CHH207457A4016	14
Ivory/ White	**6620H-A07457 17**	2CHH207457A4017	14
Macchiato/ White	**6620H-A07457 18**	2CHH207457A4018	14
White/ Smoke black	**6620H-A07457 62**	2CHH207457A4062	14
Anthracite/ Smoke black	**6620H-A07457 63**	2CHH207457A4063	14
Yellow/ Smoke black	**6620H-A07457 64**	2CHH207457A4064	14
Red/ Smoke black	**6620H-A07457 65**	2CHH207457A4065	14
Orange/ Smoke black	**6620H-A07457 66**	2CHH207457A4066	14
Green/ Smoke black	**6620H-A07457 67**	2CHH207457A4067	14
Pearl/ Ice white	**6620H-A07457 68**	2CHH207457A4068	14
Steel/ Smoke black	**6620H-A07457 69**	2CHH207457A4069	14
Silver/ Smoke black	**6620H-A07457 70**	2CHH207457A4070	14

Red/Smoke black	**6620H-A07457 65**		
	Individual packaging for retail Nominal voltage: 250 V ~ Nominal current: 16 A With a frame for installation into one installation box Screwless terminals		
Orange/ Smoke black	**6620H-A07457 66**	**2CHH207457A4066**	**Pack/Qty.**
	5522H-C03458 01W	2CHH223458C6001	10
Green/Smoke black	**6620H-A07457 67**	2CHH207457A4067	10
	5522H-C03458 16W	2CHH223458C6016	10
Pearl/Ice white	**6620H-A07457**	68 2CHH207457A4068	10
	5522H-C03458 18W	2CHH223458C6018	10
Steel/Smoke black	**6620H-A07457 69**	2CHH207457A4069	10
	5522H-C03458 63W	2CHH223458C6063	10
Silver/Smoke black	**6620H-A07457 70**	2CHH207457A4070	10
Red/ Smoke black	**5522H-C03458 65W**	2CHH223458C6065	10
Orange/ Smoke black	**5522H-C03458 66W**	2CHH223458C6066	10
Green/ Smoke black	**5522H-C03458 67W**	2CHH223458C6067	10
Pearl/ Ice White	**5522H-C03458 68W**	2CHH223458C6068	10
Steel/ Smoke black	**5522H-C03458 69W**	2CHH223458C6069	10
Silver/ Smoke black	**5522H-C03458 70W**	2CHH223458C6070	10

Socket outlet with earthing pin, shuttered

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 16 A
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**6619H-A06357 01W**	2CHH196357A6001	14
White/White	**6619H-A06357 03W**	2CHH196357A6003	14
Ivory/White	**6619H-A06357 17W**	2CHH196357A6017	14
Macchiato/White	**6619H-A06357 18W**	2CHH196357A6018	14
White/ Smoke black	**6619H-A06357 62W**	2CHH196357A6062	14
Anthracite/ Smoke Black	**6619H-A06357 63W**	2CHH196357A6063	14
Pearl/Ice White	**6619H-A06357 68W**	2CHH196357A6068	14
Steel/ Smoke black	**6619H-A06357 69W**	2CHH196357A6069	14
Silver/ Smoke black	**6619H-A06357 70W**	2CHH196357A6070	14

Socket outlet with earthing pin, shuttered Group packaging

Nominal voltage: 250 V
Nominal current 16A
screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**6619H-A06357 01**	2CHH196357A4001	10
White/White	**6619H-A06357 03**	2CHH196357A4003	10
Grey/White	**6619H-A06357 16**	2CHH196357A4016	10
Ivory/White	**6619H-A06357 17**	2CHH196357A4017	10
Macchiato/White	**6619H-A06357 18**	2CHH196357A4018	10
White/ Smoke black	**6619H-A06357 62**	2CHH196357A4062	10
Yellow/ Smoke black	**6619H-A06357 64**	2CHH196357A4063	10
Red/Smoke black	**6619H-A06357 65**	2CHH196357A4064	10
Orange/ Smoke black	**6619H-A06357 66**	2CHH196357A4065	10
Green/ Smoke black	**6619H-A06357 67**	2CHH196357A4066	10
Anthracite/ Smoke Black	**6619H-A06357 63**	2CHH196357A4067	10
Pearl/Ice White	**6619H-A06357 68**	2CHH196357A4068	10
Steel/ Smoke black	**6619H-A06357 69**	2CHH196357A4069	10
Silver/ Smoke black	**6619H-A06357 70**	2CHH196357A4070	10

Levit®
Socket outlets

Double socket outlet with earthing pins, shuttered

Individual packaging for retail
Nominal voltage: 250 V ~
Nominal current: 16 A
With turned upper cavity
With a frame for installation into one installation box
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**5513H-C02357 01W**	2CHH132357C6001	10
White/White	**5513H-C02357 03W**	2CHH132357C6003	10
Grey/White	**5513H-C02357 16W**	2CHH132357C6016	10
Ivory/White	**5513H-C02357 17W**	2CHH132357C6017	10
Macchiato/White	**5513H-C02357 18W**	2CHH132357C6018	10
White/Smoke black	**5513H-C02357 62W**	2CHH132357C6062	10
Anthracite/ Smoke Black	**5513H-C02357 63W**	2CHH132357C6063	10
Yellow/Smoke black	**5513H-C02357 64W**	2CHH132357C6064	10
Red/Smoke black	**5513H-C02357 65W**	2CHH132357C6065	10
Orange/Smoke black	**5513H-C02357 66W**	2CHH132357C6066	10
Green/Smoke black	**5513H-C02357 67W**	2CHH132357C6067	10
Pearl/Ice White	**5513H-C02357 68W**	2CHH132357C6068	10
Steel/Smoke black	**5513H-C02357 69W**	2CHH132357C6069	10
Silver/Smoke black	**5513H-C02357 70W**	2CHH132357C6070	10

Socket outlet with earthing pin, shuttered with cover

Nominal voltage: 250 V ~
Nominal current: 16 A
Screwless terminals
Degree of moisture protection: IP44

Compatible with standard Levit frames
1gang to 3gang (Art. No. 3901H-A050..0 ..)

Colour	Type	Order code	Pack/Qty.
White/White	6619H-A06997 03	2CHH196997A6003	10
Macchiato/White	6619H-A06997 18	2CHH196997A6018	10
White/ Smoke black	6619H-A06997 62	2CHH196997A6062	10
Anthracite/ Smoke Black	6619H-A06997 63	2CHH196997A6063	10
Silver/ Smoke black	6619H-A06997 70	2CHH196997A6070	10

Socket outlet with earthing pin, shuttered with cover

Nominal voltage :250 v
Nominal currect: 16A
screwless terminals
Degree of moisture protection : IP40

Colour	Type	Order code	Pack/Qty.
White/White	**6619H-A06397 03**	2CHH196397A4003	10
Macchiato/White	**6619H-A06397 18**	2CHH196397A4018	10
White/ Smoke black	**6619H-A06397 62**	2CHH196397A4062	10
Anthracite/ Smoke Black	**6619H-A06397 63**	2CHH196397A4063	10
Silver/ Smoke black	**6619H-A06397 70**	2CHH196397A4070	10

Socket outlet with pin, USB A+C, shuttered

For connecting electric loads. DP (2 P + E)
With screwless terminals.
For supply and support of mobile devices via USB-cable. With 1x USB type A and 1x USB type C outputs.
Simultaneous charging via USB connection and use of the socket outlet.
Support of loading protocol on the USB-A connection: Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of loading protocol on the USB-C connection: USB-PD till 3 A, Apple MFI till 2.4 A and BC 1.2 with 1.5 A.
With electronic short-circuit protection.
With electronic overload protection.
Rated voltage: 230 V AC
Rated frequency: 50 Hz / 60 Hz
Power dissipation: < 75 mW
Rated current: 16 A
Outputs: 2x USB charging interface
Output voltage: 5 V DC
Rated power: 15 W
Suitable for: In case one output is used:
USB-A port: Max. current 2.4 A.
USB-C port: Max. current 3 A*
*3 A requires approved charging cables.
Protection class (Device): IP 20, SELV
Temperature range (Device): 5 °C to 35 °C
Mounting depth: 39.5 mm

Colour	Type	Order code	Pack/Qty.
White/Ice white	**5569H-A32357 01**	2CHH693257A4001	1
White/White	**5569H-A32357 03**	2CHH693257A4003	1
Grey/White	**5569H-A32357 16**	2CHH693257A4016	1
Ivory/White	**5569H-A32357 17**	2CHH693257A4017	1
Macchiato/White	**5569H-A32357 18**	2CHH693257A4018	1
White/ Smoke black	**5569H-A32357 62**	2CHH693257A4062	1
Anthracite/ Smoke Black	**5569H-A32357 63**	2CHH693257A4063	1
Yellow/ Smoke black	**5569H-A32357 64**	2CHH693257A4064	1
Red/Smoke black	**5569H-A32357 65**	2CHH693257A4065	1

Levit®
Socket outlets

Socket outlet 55×55 with earthing pin, shuttered

Nominal voltage: 250 V ~
Nominal current: 16 A
Screwless terminals

If installing into a separate 1gang frame, please use the specialized frames with a 55×55 internal window (Art. No. 3901H-A05510 ..)
If installing into a multigang frame, use standard frames with the corresponding number of gangs (Art. No. 3901H-A050..) along with specialized cover plates with internal window 55×55 (Art. No. 3901H-A00..55..): external or internal depending on the position of the insert in the frame.
Also available: 2gang frames with a 55×55 internal window (Art. No. 3901H-A05520 ..)

Colour	Type	Order code	Pack/Qty.
White/White	**6619H-A06557 03**	2CHH196557A4003	10
Grey/White	**6619H-A06557 16**	2CHH196557A4016	10
Macchiato/White	**6619H-A06557 18**	2CHH196557A4018	10
Anthracite/ Smoke Black	**6619H-A06557 63**	2CHH196557A4063	10
Pearl/Ice White	**6619H-A06557 68**	2CHH196557A4068	10
Steel/ Smoke black	**6619H-A06557 69**	2CHH196557A4069	
Silver/ Smoke black	**6619H-A06557 70**	2CHH196557A4070	10

Socket outlet with earthing pin, shuttered with surge protection

Nominal voltage: 250 V ~
Nominal current: 16 A
Screwless terminals
Optical fault signalling.
Degree of protection: IP40

Colour	Type	Order code	Pack/Qty.
White/Ice white	**5599H-A02357 01**	2CHH966357A4001	1
White/White	**5599H-A02357 03**	2CHH966357A4003	1
Grey/White	**5599H-A02357 16**	2CHH966357A4016	1
Ivory/White	**5599H-A02357 17**	2CHH966357A4017	1
Macchiato/White	**5599H-A02357 18**	2CHH966357A4018	1
White/Smoke black	**5599H-A02357 62**	2CHH966357A4062	1
Anthracite/ Smoke Black	**5599H-A02357 63**	2CHH966357A4063	1
Yellow/Smoke black	**5599H-A02357 64**	2CHH966357A4064	1
Red/Smoke black	**5599H-A02357 65**	2CHH966357A4065	1
Orange/Smoke black	**5599H-A02357 66**	2CHH966357A4066	1
Green/Smoke black	**5599H-A02357 67**	2CHH966357A4067	1
Pearl/Ice White	**5599H-A02357 68**	2CHH966357A4068	1
Steel/Smoke black	**5599H-A02357 69**	2CHH966357A4069	1
Silver/Smoke black	**5599H-A02357 70**	2CHH966357A4070	1

Double socket outlet with earthing pins, shuttered with surge protection and turned upper cavity

Nominal voltage: 250 V ~
Nominal current: 16 A
With a frame for installation into one installation box
Optical fault signalling.
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**5593H-C02357 01**	2CHH922357C4001	1
White/White	**5593H-C02357 03**	2CHH922357C4003	1
Grey/White	**5593H-C02357 16**	2CHH922357C4016	1
Ivory/White	**5593H-C02357 17**	2CHH922357C4017	1
Macchiato/White	**5593H-C02357 18**	2CHH922357C4018	1
White/Smoke black	**5593H-C02357 62**	2CHH922357C4062	1
Anthracite/ Smoke Black	**5593H-C02357 64**	2CHH922357C4063	1
Yellow/Smoke black	**5593H-C02357 65**	2CHH922357C4064	1
Red/Smoke black	**5593H-C02357 66**	2CHH922357C4065	1
Orange/Smoke black	**5593H-C02357 67**	2CHH922357C4066	1
Green/Smoke black	**5593H-C02357 63**	2CHH922357C4067	1
Pearl/Ice White	**5593H-C02357 68**	2CHH922357C4068	1
Steel/Smoke black	**5593H-C02357 69**	2CHH922357C4069	1
Silver/Smoke black	**5593H-C02357 70**	2CHH922357C4070	1

Socket outlet with earthing pin, shuttered with overcurrent protection

Nominal voltage: 250 V ~
Nominal current: 16 A
Screwless terminals

Residual working current IΔn: 30 mA
Type A, AC and pulse current sensitivity
Rated current In: 16 A
Rated frequency: 45 - 60 Hz
Charging time at 5× IΔn: max. 30 ms
Rated short-circuit current: 3,000 A
Impulse current resistance: 3,000 A, 8/20 µs
Ambient temperature: –25 °C to +40 °C
Degree of protection: IP 20
Climatic resistance: in accordance with EN 61008-1
Connection cross-section: 1.5 to 2.5 mm^2
Mounting depth: 32 mm

If installing into a separate 1gang frame, please use the specialized frames with a 55×55 internal window (Art. No. 3901H-A05510 ..)
If installing into a multigang frame, use standard frames with the corresponding number of gangs (Art. No. 3901H-A050..) along with specialized cover plates with internal window 55×55 (Art. No. 3901H-A00..55..): external or internal depending on the position of the insert in the frame.
Also available: 2gang frames with a 55×55 internal window (Art. No. 3901H-A05520 ..)

Colour	Type	Order code	Pack/Qty.
White	**5526H-A02369 03**	2CHH262369A4003	1

Levit®
Socket outlets

Socket outlet for centralized dust collector

Socket outlet with cover and base is designed for centralized dust collection systems
to be used with 51 mm pipes
(with 32 to 36 mm tapered end
and 37.5 / 37.0 to 38.5 / 38 mm diameter)
For vacuums of pressure 10–45 kPa.
The frame is integral to the socket outlet
The socket outlet cannot be
mounted in multi-gang frames
The horizontal axis of the socket outlet
is the horizontal axis of the pipe opening

Colour	Type	Order code	Pack/Qty.
White/Ice white	**5530H-C67107 01**	2CHH506717C4001	8
White/White	**5530H-C67107 03**	2CHH506717C4003	8
Grey/White	**5530H-C67107 16**	2CHH506717C4016	8
Ivory/White	**5530H-C67107 17**	2CHH506717C4017	8
Macchiato/White	**5530H-C67107 18**	2CHH506717C4018	8
White/ Smoke black	**5530H-C67107 62**	2CHH506717C4062	8
Anthracite/ Smoke Black	**5530H-C67107 63**	2CHH506717C4063	8
Yellow/ Smoke black	**5530H-C67107 64**	2CHH506717C4064	8
Red/ Smoke black	**5530H-C67107 65**	2CHH506717C4065	8
Orange/ Smoke black	**5530H-C67107 66**	2CHH506717C4066	8
Green/ Smoke black	**5530H-C67107 67**	2CHH506717C4067	8
Pearl/ Ice White	**5530H-C67107 68**	2CHH506717C4068	8
Steel/ Smoke black	**5530H-C67107 69**	2CHH506717C4069	8
Silver/ Smoke black	**5530H-C67107 70**	2CHH506717C4070	8

Levit®
Telecommunications systems / multimedia

Antenna socket outlet, TV-R, END

Individual packaging for retail
Resistance: 75 Ohm
For 3.6 - 6.8 mm coaxial cable

Colour	Type	Order code	Pack/Qty.
White	**5011H-A03503 03W**	2CHH083503A6003	16
Grey	**5011H-A03503 16W**	2CHH083503A6016	16
Ivory	**5011H-A03503 17W**	2CHH083503A6017	16
Macchiato	**5011H-A03503 18W**	2CHH083503A6018	16
Anthracite	**5011H-A03503 63W**	2CHH083503A6063	16
Yellow	**5011H-A03503 64W**	2CHH083503A6064	16
Red	**5011H-A03503 65W**	2CHH083503A6065	16
Orange	**5011H-A03503 66W**	2CHH083503A6066	16
Green	**5011H-A03503 67W**	2CHH083503A6067	16
Pearl	**5011H-A03503 68W**	2CHH083503A6068	16
Steel	**5011H-A03503 69W**	2CHH083503A6069	16
Silver	**5011H-A03503 70W**	2CHH083503A6070	16

Connection unit TV-R-SAT

Individual packaging for retail
Power supply to adapter for satellite receiver 500 mA DC, 22 kHz
Resistance: 75 Ohm
For 3.6 - 6.8 mm coaxial cable

Colour	Type	Order code	Pack/Qty.
White	**5011H-A03303 03W**	2CHH083303A6003	16
Grey	**5011H-A03303 16W**	2CHH083303A6016	16
Ivory	**5011H-A03303 17W**	2CHH083303A6017	16
Macchiato	**5011H-A03303 18W**	2CHH083303A6018	16
Anthracite	**5011H-A03303 63W**	2CHH083303A6063	16
Yellow	**5011H-A03303 64W**	2CHH083303A6064	16
Red	**5011H-A03303 65W**	2CHH083303A6065	16
Orange	**5011H-A03303 66W**	2CHH083303A6066	16
Green	**5011H-A03303 67W**	2CHH083303A6067	16
Pearl	**5011H-A03303 68W**	2CHH083303A6068	16
Steel	**5011H-A03303 69W**	2CHH083303A6069	16
Silver	**5011H-A03303 70W**	2CHH083303A6070	16

TV-R socket outlet insert, loop-through type

for panels Art. No. 5011H-A00300 ..
Tap loss: 10 dB
Resistance: 75 Ohm
For 3.6 - 6.8 mm coaxial cable

Colour	Type	Order code	Pack/Qty.
	5011-A3610	2CHU083610A4000	1

TV-R socket outlet insert, loop-through type

for panels Art. No. 5011H-A00300 ..
Tap loss: 14 dB
Resistance: 75 Ohm
For 3.6 - 6.8 mm coaxial cable

Colour	Type	Order code	Pack/Qty.
	5011-A3614	2CHU083614A4000	1

Levit®

Telecommunications systems / multimedia

TV-R socket outlet, loop-through type

Individual packaging for retail
Tap loss: 7 dB
Resistance: 75 Ohm
For 3.6 - 6.8 mm coaxial cable

Colour	Type	Order code	Pack/Qty.
White	**5011H-A03607 03W**	2CHH083607A6003	16
Grey	**5011H-A03607 16W**	2CHH083607A6016	16
Ivory	**5011H-A03607 17W**	2CHH083607A6017	16
Macchiato	**5011H-A03607 18W**	2CHH083607A6018	16
Anthracite	**5011H-A03607 63W**	2CHH083607A6063	16
Yellow	**5011H-A03607 64W**	2CHH083607A6064	16
Red	**5011H-A03607 65W**	2CHH083607A6065	16
Orange	**5011H-A03607 66W**	2CHH083607A6066	16
Green	**5011H-A03607 67W**	2CHH083607A6067	16
Pearl	**5011H-A03607 68W**	2CHH083607A6068	16
Steel	**5011H-A03607 69W**	2CHH083607A6069	16
Silver	**5011H-A03607 70W**	2CHH083607A6070	16

TV-R / TV-R-SAT socket outlet cover plate

For TV-R socket outlet inserts
(Art. No. 5011-A3610 and 5011-A3614)

Colour	Type	Order code	Pack/Qty.
White	**5011H-A00300 03**	2CHH080300A4003	10
Grey	**5011H-A00300 16**	2CHH080300A4016	10
Ivory	**5011H-A00300 17**	2CHH080300A4017	10
Macchiato	**5011H-A00300 18**	2CHH080300A4018	10
Anthracite	**5011H-A00300 63**	2CHH080300A4063	10
Yellow	**5011H-A00300 64**	2CHH080300A4064	10
Red	**5011H-A00300 65**	2CHH080300A4065	10
Orange	**5011H-A00300 66**	2CHH080300A4066	10
Green	**5011H-A00300 67**	2CHH080300A4067	10
Pearl	**5011H-A00300 68**	2CHH080300A4068	10
Steel	**5011H-A00300 69**	2CHH080300A4069	10
Silver	**5011H-A00300 70**	2CHH080300A4070	10

Data socket outlet, RJ45 CAT5e + end strip Includes:

Individual packaging for retail
RJ45 category 5e + end strip
With labelling field

Colour	Type	Order code	Pack/Qty.
White	**5014H-A51017 03W**	2CHH295117A6003	24
Grey	**5014H-A51017 16W**	2CHH295117A6016	24
Ivory	**5014H-A51017 17W**	2CHH295117A6017	24
Macchiato	**5014H-A51017 18W**	2CHH295117A6018	24
Anthracite	**5014H-A51017 63W**	2CHH295117A6063	24
Yellow	**5014H-A51017 64W**	2CHH295117A6064	24
Red	**5014H-A51017 65W**	2CHH295117A6065	24
Orange	**5014H-A51017 66W**	2CHH295117A6066	24
Green	**5014H-A51017 67W**	2CHH295117A6067	24
Pearl	**5014H-A51017 68W**	2CHH295117A6068	24
Steel	**5014H-A51017 69W**	2CHH295117A6069	24
Silver	**5014H-A51017 70W**	2CHH295117A6070	24

Data socket outlet, RJ45+end strip, CAT6

Individual packaging for retail
Includes: RJ45 (category 6) + end strip
With labelling field

Colour	Type	Order code	Pack/Qty.
White	**5014H-A61017 03W**	2CHH296117A6003	24
Grey	**5014H-A61017 16W**	2CHH296117A6016	24
Ivory	**5014H-A61017 17W**	2CHH296117A6017	24
Macchiato	**5014H-A61017 18W**	2CHH296117A6018	24
Anthracite	**5014H-A61017 63W**	2CHH296117A6063	24
Yellow	**5014H-A61017 64W**	2CHH296117A6064	24
Red	**5014H-A61017 65W**	2CHH296117A6065	24
Orange	**5014H-A61017 66W**	2CHH296117A6066	24
Green	**5014H-A61017 67W**	2CHH296117A6067	24
Pearl	**5014H-A61017 68W**	2CHH296117A6068	24
Steel	**5014H-A61017 69W**	2CHH296117A6069	24
Silver	**5014H-A61017 70W**	2CHH296117A6070	24

Cover plate for communication inserts with mounting plate

Metallic mounting plate with cover plate
For mounting two Modular-Jack (keystone)
Dimensions of socket connector: 19.4X14.8 mm
Can be used with cover strips Art. No. 1116412-3
With labelling field

Colour	Type	Order code	Pack/Qty.
White	**5014H-A01018 03**	2CHH291018A4003	10
Grey	**5014H-A01018 16**	2CHH291018A4016	10
Ivory	**5014H-A01018 17**	2CHH291018A4017	10
Macchiato	**5014H-A01018 18**	2CHH291018A4018	10
Anthracite	**5014H-A01018 63**	2CHH291018A4063	10
Yellow	**5014H-A01018 64**	2CHH291018A4064	10
Red	**5014H-A01018 65**	2CHH291018A4065	10
Orange	**5014H-A01018 66**	2CHH291018A4066	10
Green	**5014H-A01018 67**	2CHH291018A4067	10
Pearl	**5014H-A01018 68**	2CHH291018A4068	10
Steel	**5014H-A01018 69**	2CHH291018A4069	10
Silver	**5014H-A01018 70**	2CHH291018A4070	10

Levit®

Telecommunications systems / multimedia

Data socket outlet, 2×RJ45, CAT 5e

Individual packaging for retail
Includes: two RJ45 (category 5e)
With labelling field

Colour	Type	Order code	Pack/Qty.
White	**5014H-A51018 03W**	2CHH295118A6003	24
Grey	**5014H-A51018 16W**	2CHH295118A6016	24
Ivory	**5014H-A51018 17W**	2CHH295118A6017	24
Macchiato	**5014H-A51018 18W**	2CHH295118A6018	24
Anthracite	**5014H-A51018 63W**	2CHH295118A6063	24
Yellow	**5014H-A51018 64W**	2CHH295118A6064	24
Red	**5014H-A51018 65W**	2CHH295118A6065	24
Orange	**5014H-A51018 66W**	2CHH295118A6066	24
Green	**5014H-A51018 67W**	2CHH295118A6067	24
Pearl	**5014H-A51018 68W**	2CHH295118A6068	24
Steel	**5014H-A51018 69W**	2CHH295118A6069	24
Silver	**5014H-A51018 70W**	2CHH295118A6070	24

Data socket outlet, 2×RJ45, CAT 6

Individual packaging for retail
Includes: two RJ 45 (CAT 6)
With labelling field

Colour	Type	Order code	Pack/Qty.
White	**5014H-A61018 03W**	2CHH296118A6003	24
Grey	**5014H-A61018 16W**	2CHH296118A6016	24
Ivory	**5014H-A61018 17W**	2CHH296118A6017	24
Macchiato	**5014H-A61018 18W**	2CHH296118A6018	24
Anthracite	**5014H-A61018 63W**	2CHH296118A6063	24
Yellow	**5014H-A61018 64W**	2CHH296118A6064	24
Red	**5014H-A61018 65W**	2CHH296118A6065	24
Orange	**5014H-A61018 66W**	2CHH296118A6066	24
Green	**5014H-A61018 67W**	2CHH296118A6067	24
Pearl	**5014H-A61018 68W**	2CHH296118A6068	24
Steel	**5014H-A61018 69W**	2CHH296118A6069	24
Silver	**5014H-A61018 70W**	2CHH296118A6070	24

Cable outlet

Individual packaging for retail
With strain relief
Compatible with 3 × 1.5 mm² - 5 × 2.5 mm² supply cable
Cross-connecting terminal block is not included

Colour	Type	Order code	Pack/Qty.
White	**3938H-A00034 03W**	2CHH480034A6003	50
Grey	**3938H-A00034 16W**	2CHH480034A6016	50
Ivory	**3938H-A00034 17W**	2CHH480034A6017	50
Macchiato	**3938H-A00034 18W**	2CHH480034A6018	50
Anthracite	**3938H-A00034 63W**	2CHH480034A6063	50
Yellow	**3938H-A00034 64W**	2CHH480034A6064	50
Red	**3938H-A00034 65W**	2CHH480034A6065	50
Orange	**3938H-A00034 66W**	2CHH480034A6066	50
Green	**3938H-A00034 67W**	2CHH480034A6067	50
Pearl	**3938H-A00034 68W**	2CHH480034A6068	50
Steel	**3938H-A00034 69W**	2CHH480034A6069	50
Silver	**3938H-A00034 70W**	2CHH480034A6070	50

Stereo loudspeaker connection box

Busch-Jaeger insert
Compatible with Levit cover plates
Art. No. 5014H-A00040 ..
With screwless terminals
(with screw-type terminals on the back).
4 connection terminals.
Maximum cable diameter: 10 mm².
Polarity is indicated by color.
With claws.

Colour	Type	Order code	Pack/Qty.
White	**0248/04-101-500**	2CKA000230A0464	1
Black	**0248/05-101**	2CKA000230A0404	1

Cover plate for USB / HDMI / VGA / stereo connection unit

Compatible with Busch-Jaeger inserts for
USB / HDMI / VGA / stereo connection units

Colour	Type	Order code	Pack/Qty.
White	**5014H-A00040 03**	2CHH290040A4003	10
Grey	**5014H-A00040 16**	2CHH290040A4016	10
Ivory	**5014H-A00040 17**	2CHH290040A4017	10
Macchiato	**5014H-A00040 18**	2CHH290040A4018	10
Anthracite	**5014H-A00040 63**	2CHH290040A4063	10
Yellow	**5014H-A00040 64**	2CHH290040A4064	10
Red	**5014H-A00040 65**	2CHH290040A4065	10
Orange	**5014H-A00040 66**	2CHH290040A4066	10
Green	**5014H-A00040 67**	2CHH290040A4067	10
Pearl	**5014H-A00040 68**	2CHH290040A4068	10
Steel	**5014H-A00040 69**	2CHH290040A4069	10
Silver	**5014H-A00040 70**	2CHH290040A4070	10

USB power adapter insert, flush-mounted [1] [2] [3] With USB-A & USB-C interface

For supply and support of mobile devices via USB-cable. With USB type A and USB type C female connector. To support two devices at the same time. Supports automatic negotiating of optimum charging parameters for the shortest charging times. Support of loading protocol on the USB-A connection:
Apple MFI with 2.4 A and BC 1.2 with 1.5 A.
Support of the additional quick-charge protocols: USB-PD and quick-charge 3.0 & 4.0. With electronic short-circuit protection. With electronic overload protection. Rated voltage: 230 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz. Outputs: 2x USB charging interface
Suitable for: Only USB-A bus occupied:
Rated current: 3000 mA. Output voltage: 5 V-
Suitable for: Only USB-C bus occupied:
Rated power: 18 W
Suitable for: USB-A and USB-C bus occupied. Total:
Rated current: 3250 mA. Output voltage: 5 V-
Protection class (Device): IP 20, SELV. Temperature range (Device): 0 °C to 35 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 43 mm. Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	6475 U-500	2CKA006400A0399	1

[1] No claw. Screw-fixing via keyholes.
[2] No data transfer.
[3] When cleaning the device, use dust cover 2098 for the USB-A connection.

Levit®

Telecommunications systems / multimedia

Busch Btconnect Radio

Busch-Jaeger insert
Compatible with Levit cover plates
Art. No. 3299H-A40200 ..
RDS stereo radio with display,
for flush-mounted installation.
With Bluetooth interface to play from mobile devices.
Receive frequency: 87.50 - 108.00 MHz.
With external AUX input.
For mono/stereo operation, 8 radio stations storable.
With time and date display.
With alarm clock and snooze function.
With short-time timer.
With automatic switch-off function.
With extension input to remote-controlled
ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
Can be installed into standard installation
box. Bluetooth specification: 2.1
Bluetooth profiles supported: A2DP
Number of stored Bluetooth connections: max. 8
Nominal voltage: 110 - 230 V~, +10%/-10%
Rated frequency: 50 Hz - 60 Hz
Protection class: IP 20
Operating temperature: 5°C to 40°C
Dimensions (Height × Width × Depth):
71 mm × 71 mm × 47 mm
Built-in depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8217 U-500	2CKA008200A0194	1

Busch-DigitalRadio

Busch-Jaeger insert
Compatible with Levit cover plates
Art. No. 3299H-A40200 ..
RDS stereo radio with display
for flush-mounted installation
Receive frequency: 87.50 - 108.00 MHz.
for mono/stereo operation.
8 radio stations storable.
Clock.
With alarm function.
With automatic switch-off function.
With extension input to remote-controlled
ON/OFF switches.
With integrated antenna.
With additional connection for external antenna.
Permitted speaker impedance: 4 - 8 Ohm
To be installed in conjunction with
standard mounting boxes.
Nominal voltage: 230 V~, +10%/-10%
Rated frequency: 50 Hz - 60 Hz
Protection class: IP 20
Operating temperature: 5°C to 40°C
Dimensions (Height × Width × Depth):
71 mm × 71 mm × 49 mm
Built-in depth: 34 mm

Colour	Type	Order code	Pack/Qty.
	8215 U-500	2CKA008200A0182	1

Cover plate for FM radio / Busch-Radio iNet / BT radio inserts

For Busch-Jaeger inserts:
- Busch Btconnect Radio
  2CKA008200A0194
- Busch-DigitalRadio
  2CKA008200A0182
- Busch iNet Radio
  2CKA008200A0153

If installing into a separate 1gang frame, please use the specialized frames with a 55 × 55 internal window (Art. No. 3901H-A05510 ..)

If installing into a multigang frame, use standard frames with the corresponding number of gangs (Art. No. 3901H-A050..) along with specialized cover plates with a 55 × 55 internal window (Art. No. 3901H-A00..55..), external or internal depending on the position of the insert in the frame. Also available: 2gang frames with a 55 × 55 internal window (Art. No. 3901H-A05520 ..)

Colour	Type	Order code	Pack/Qty.
White	**3299H-A40200 03**	2CHH704020A4003	5
Grey	**3299H-A40200 16**	2CHH704020A4016	5
Ivory	**3299H-A40200 17**	2CHH704020A4017	5
Macchiato	**3299H-A40200 18**	2CHH704020A4018	5
Anthracite	**3299H-A40200 63**	2CHH704020A4063	5
Yellow	**3299H-A40200 64**	2CHH704020A4064	5
Red	**3299H-A40200 65**	2CHH704020A4065	5
Orange	**3299H-A40200 66**	2CHH704020A4066	5
Green	**3299H-A40200 67**	2CHH704020A4067	5
Pearl	**3299H-A40200 68**	2CHH704020A4068	5
Steel	**3299H-A40200 69**	2CHH704020A4069	5
Silver	**3299H-A40200 70**	2CHH704020A4070	5

Levit®

Telecommunications systems / multimedia

Loudspeaker insert, 5 cm

Busch-Jaeger insert
Compatible with Levit cover plates
Art. No. 5016H-A00075 ..
For digital radio 8215 U-500
For Busch-Radio iNet 8216 U-500
For Busch-Radio BTconnect 8217 U-500
With broadband characteristics.
With flat plug connector.
Incl. speaker connection cable.
Nominal power: 2 W (RMS)
Frequency range: 200 - 20000 Hz
Impedance: 4 Ohm
Protection class: IP 20, SELV
Mounting depth: 32 mm

Colour	Type	Order code	Pack/Qty.
	8223 U-500	2CKA008200A0183	1

Cover plate for loudspeaker

For Busch-Jaeger loudspeaker insert:
2CKA008200A0183
If installing into a separate 1gang frame, please use the specialized frames with a 55 × 55 internal window (Art. No. 3901H-A05510 ..)
If installing into a multigang frame, use standard frames with the corresponding number of gangs (Art. No. 3901H-A050..) along
with specialized cover plates with a 55 × 55 internal window (Art. No. 3901H-A00..55..):
external or internal depending on the position of the insert in the frame.
Also available: 2gang frames with a 55 × 55 internal window (Art. No. 3901H-A05520 ..)

Colour	Type	Order code	Pack/Qty.
White	**5016H-A00075 03**	2CHH660075A4003	5
Grey	**5016H-A00075 16**	2CHH660075A4016	5
Ivory	**5016H-A00075 17**	2CHH660075A4017	5
Macchiato	**5016H-A00075 18**	2CHH660075A4018	5
Anthracite	**5016H-A00075 64**	2CHH660075A4064	5
Yellow	**5016H-A00075 65**	2CHH660075A4065	5
Red	**5016H-A00075 66**	2CHH660075A4066	5
Orange	**5016H-A00075 67**	2CHH660075A4067	5
Green	**5016H-A00075 63**	2CHH660075A4063	5
Pearl	**5016H-A00075 68**	2CHH660075A4068	5
Steel	**5016H-A00075 69**	2CHH660075A4069	5
Silver	**5016H-A00075 70**	2CHH660075A4070	5

Levit®

Rocker switches / push switches

Friends of Hue smart switch complete set. Wall transmitter, 2/4 channels

Consitsting of Friends of Hue smart switch insert 6716 U-500. Comprising 2gang rocker 6736 FoH-8xx for Friends of Hue smart switch. Consisting of 1gang future® linear cover frames. Comprising fixing plate and intermediate ring. Smarter light switches for wireless remote control of Philips Hue lamps For switching and dimming of Philips Hue lamps. For saving, calling up and dimming of a maximum of 2 individual light scenes. Without battery and maintenance-free due to >Energy harvesting<. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate. Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher). Maximum safety of function by means of Zigbee-Mesh technology. Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Colour	Type	Order code	Pack/Qty.
white	**6221H-C01000 03**	2CHH620100C4003	1

Control element for smart switch 2gang

2gang rocker for Friends of Hue and Bluetooth (Casambi) smart switch insert 6716 U-500, 6716 UBT and 6716/10 UBT.

Colour	Type	Order code	Pack/Qty.
White/White	**6221H-A01010 03**	2CHH621010A4003	1
Grey/White	**6221H-A01010 16**	2CHH621010A4016	1
Ivory/White	**6221H-A01010 17**	2CHH621010A4017	1
Macchiato/ White	**6221H-A01010 18**	2CHH621010A4018	1
White/ Smoke black	**6221H-A01010 62**	2CHH621010A4062	1
Anthracite/ Smoke Black	**6221H-A01010 63**	2CHH621010A4063	1
Yellow/ Smoke black	**6221H-A01010 64**	2CHH621010A4064	1
Red/ Smoke black	**6221H-A01010 65**	2CHH621010A4065	1
Orange/ Smoke black	**6221H-A01010 66**	2CHH621010A4066	1
Green/ Smoke black	**6221H-A01010 67**	2CHH621010A4067	1
Pearl/Ice White	**6221H-A01010 68**	2CHH621010A4068	1
Steel/ Smoke black	**6221H-A01010 69**	2CHH621010A4069	1
Silver/ Smoke black	**6221H-A01010 70**	2CHH621010A4070	1

Levit®
Dimmers

Cover plate for rotary dimmer

Compatible with Busch-Jaeger rotary dimmer inserts:
2CKA006520A0227
2CKA006517A0018
2CKA006512A0354
2CKA006513A0588
2CKA006513A0590
2CKA006599A2987
2CKA006599A3025
2CKA006599A2988
2CKA006599A3026

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3294H-A00123 01**	2CHH940123A4001	5
White/White	**3294H-A00123 03**	2CHH940123A4003	5
Grey/White	**3294H-A00123 16**	2CHH940123A4016	5
Ivory/White	**3294H-A00123 17**	2CHH940123A4017	5
Macchiato/White	**3294H-A00123 18**	2CHH940123A4018	5
White/ Smoke black	**3294H-A00123 62**	2CHH940123A4062	5
Anthracite/ Smoke Black	**3294H-A00123 63**	2CHH940123A4063	5
Yellow/ Smoke black	**3294H-A00123 64**	2CHH940123A4064	5
Red/ Smoke black	**3294H-A00123 65**	2CHH940123A4065	5
Orange/ Smoke black	**3294H-A00123 66**	2CHH940123A4066	5
Green/ Smoke black	**3294H-A00123 67**	2CHH940123A4067	5
Pearl/ Ice White	**3294H-A00123 68**	2CHH940123A4068	5
Steel/ Smoke black	**3294H-A00123 69**	2CHH940123A4069	5
Silver/ Smoke black	**3294H-A00123 70**	2CHH940123A4070	5

Rotary dimmer insert, LED, 2–400 W

LED dimmer With rotary control.
Two-way switch and soft-catch.
With N-terminal.
2- or 3-wire connection (neutral conductor not required).
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Very low installation depth: < 20 mm Without claws.
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection. With electronic overload protection.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10% Rated frequency: 50 Hz/60 Hz.
Nominal power (L): 2 - 100 W/VA (leading-edge control).
Nominal power (R, C): 10 - 360 W/VA (trailing-edge control).
Nominal power (LEDi): 2 - 100 W/VA (leading-edge control).
Nominal power (LEDi): 2 - 200 W/VA (trailing-edge control).

Colour	Type	Order code	Pack/Qty.
	6523 UR-104-500	2CKA006512A0354	1

Levit®
Dimmers

Rotary dimmer, DALI, TW

Busch-Jaeger insert
Compatible with Levit cover plates
Art. No. 3294H-A00123 ..
For broadcast service (via central telegram).
For switching and dimming up to 37 DALI devices according to IEC 62386 (such as electronic ballasts and transformers with DALI-interface).
With rotary knob and ON/OFF push operation.
Protection against incorrect polarity.
For changing the color temperature of lamps “tunable white”, which meet DALI Standard IEC 62386-209 (Device Type 8). Color temperature can then be set between 2,700 K - 6,500 K.
Brightness power-on level and background brightness level adjustable, buffered. With integrated LED illumination for orientation. Up to 5 devices are connectable in parallel in passive mode.
Max. power consumption: 15 mA. Not suitable for combining with other DALI sensors or central units of other manufacturers. For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE, Art. No. 2116/11 U. Max. DALI cable length: 300 m (diameter 1,5–2,5 mm²). Protection class: IP 20
Operating temperature: 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116 U	2CKA006599A3025	1

Rotary dimmer DALI

Busch-Jaeger insert
Compatible with Levit cover plates
Art. No. 3294H-A00123 ..
For broadcast service (via central telegram).
For switching and dimming up to 37 DALI devices according to IEC 62386 (such as electronic ballasts and transformers with DALI-interface).
With rotary knob and ON/OFF push operation.
Protection against incorrect polarity.
Brightness power-on level and background brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Up to 5 devices are connectable in parallel in passive mode
Max. power consumption: 15 mA.
Not suitable for combining with other DALI sensors or central units of other manufacturers.
For the generation of the DALI voltage a power supply according to IEC 62386 is required; e.g. from Tridonic, Philips, Helvar or BJE, Art. No. 2117/11 U.
Max. DALI cable length: 300 m (diameter 1,5–2,5 mm²).
Protection class: IP 20
Operating temperature: 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117 U-500	2CKA006599A2987	1

Rotary dimmer, DALI, Power

Busch-Jaeger insert
Compatible with Levit cover plates
Art. No. 3294H-A00123 ..
For broadcast service (via central telegram). With integrated DALI power adapter. For switching and dimming up to 37. DALI devices according to IEC 62386 (such as electronic ballasts and transformers with DALI-interface). With rotary knob and ON/OFF push operation. With short-circuit and overload protection (electronic fuse). Brightness power-on level and background brightness level adjustable, buffered. With integrated LED illumination for orientation. Up to 5 devices are connectable in parallel in passive mode. Connectable in parallel up to 3 devices in active mode. Not suitable for combining with other DALI sensors or central units of other manufacturers. Voltage DALI: 15.5 V =
Max. output current: 75 mA
Power consumption: < 2.5 W
Max. number of DALI-units:
- in the case of one active DALI potentiometer: 37
- in the case of 3 active DALI potentiometers in parallel connection: 111
Active mode: the potentiometer supplies the power to other DALI-devices and the control units.
Passive mode, without mains power:
a potentiometer in a DALI cable is suitable as an additional control point.
Max. DALI cable length: 300 m (diameter 1,5–2,5 mm²).
Nominal voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class: IP 20
Operating temperature: 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2117/11 U-500	2CKA006599A2988	1

Levit®
Dimmers

Rotary dimmer DALI, Power, TW

Busch-Jaeger insert
Compatible with Levit cover plates
Art. No. 3294H-A00123 ..
For broadcast service (via central telegram).
With integrated DALI power adapter.
For switching and dimming up to 37
DALI devices according to IEC 62386
(such as electronic ballasts
and transformers with DALI-interface).
With rotary knob and ON/OFF push operation.
For changing the color temperature
of lamps “tunable white”, which meet
DALI Standard IEC 62386-209 (Device Type 8).
Color temperature can then be set
between 2,700 K - 6,500 K.
With short-circuit and overload protection
(electronic fuse).
Brightness power-on level and background
brightness level adjustable, buffered.
With integrated LED illumination for orientation.
Up to 5 devices are connectable in parallel
in passive mode.
Connectable in parallel up to 3 devices in active mode.
Not suitable for combining with other DALI sensors
or central units of other manufacturers.
Voltage DALI: 15.5 V =
Max. output current: 75 mA
Power consumption: < 2.5 W
Max. number of DALI-units:
in the case of one active DALI potentiometer: 37
in the case of 3 active DALI potentiometers
in parallel connection:
111 Active mode: the potentiometer supplies the
necessary power to other
DALI-devices and the control units.
Passive mode, without mains power:
a potentiometer in a DALI cable
is suitable as an additional control point.
Max. DALI cable length: 300 m
(diameter 1,5–2,5 mm²).
Nominal voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Protection class: IP 20
Operating temperature: 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	2116/11 U	2CKA006599A3026	1

Control element for touch dimmers

Busch-Jaeger dimmer inserts
for touch dimmers:
2CKA006590A0171
2CKA006512A0323
2CKA006550A0042

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3299H-A00100 01**	2CHH700100A4001	5
White/White	**3299H-A00100 03**	2CHH700100A4003	5
Grey/White	**3299H-A00100 16**	2CHH700100A4016	5
Ivory/White	**3299H-A00100 17**	2CHH700100A4017	5
Macchiato/White	**3299H-A00100 18**	2CHH700100A4018	5
White/ Smoke black	**3299H-A00100 62**	2CHH700100A4062	5
Anthracite/ Smoke Black	**3299H-A00100 63**	2CHH700100A4063	5
Yellow/ Smoke black	**3299H-A00100 64**	2CHH700100A4064	5
Red/ Smoke black	**3299H-A00100 65**	2CHH700100A4065	5
Orange/ Smoke black	**3299H-A00100 66**	2CHH700100A4066	5
Green/ Smoke black	**3299H-A00100 67**	2CHH700100A4067	5
Pearl/ Ice White	**3299H-A00100 68**	2CHH700100A4068	5
Steel/ Smoke black	**3299H-A00100 69**	2CHH700100A4069	5
Silver/ Smoke black	**3299H-A00100 70**	2CHH700100A4070	5

Levit®
Dimmers

Universal thermostat with rotary knob, 16A

Can be used for heating systems and for underfloor heating (gas, water, electricity)
Linear temperature setting (1 to 5 scale)
Indication of output status by two-color LED.
Two push buttons on the panel (with light ndication):
- power On/Off
- manual temperature reduction
As room temperature controller:
- temperature range: +13 ° C to +27 ° C
- adjustable manual temperature reduction from 2 °C to 8 °C
- hysteresis: +/- 0,25 °C
As floor thermostat:
- external temperature sensor required (heated floor sensor), Art. No. 3292U-A90100
- temperature range +15 °C to +48 °C
- adjustable manual temperature reduction from 4 °C to 16 °C
- hysteresis: +/- 0,5 °C
Nominal current: 16 A
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3292H-A10101 01**	2CHH911011A4001	12
White/White	**3292H-A10101 03**	2CHH911011A4003	12
Grey/White	**3292H-A10101 16**	2CHH911011A4016	12
Ivory/White	**3292H-A10101 17**	2CHH911011A4017	12
Macchiato/White	**3292H-A10101 18**	2CHH911011A4018	12
White/ Smoke black	**3292H-A10101 62**	2CHH911011A4062	12
Anthracite/ Smoke Black	**3292H-A10101 63**	2CHH911011A4063	12
Yellow/ Smoke black	**3292H-A10101 64**	2CHH911011A4064	12
Red/ Smoke black	**3292H-A10101 65**	2CHH911011A4065	12
Orange/ Smoke black	**3292H-A10101 66**	2CHH911011A4066	12
Green/ Smoke black	**3292H-A10101 67**	2CHH911011A4067	12
Pearl/ Ice White	**3292H-A10101 68**	2CHH911011A4068	12
Steel/ Smoke black	**3292H-A10101 69**	2CHH911011A4069	12
Silver/ Smoke black	**3292H-A10101 70**	2CHH911011A4070	12

Mech. switching unit insert for thermostats or timers

For Programmable universal thermostat (Art. No. 3292H-A10301 ..)
Optional connection of external temperature sensor Art. No. 3292U-A90100 for floor heating.
In the event of power failure the control unit display goes off.
Operating temperature: 0 ° C to + 50 ° C
Output: potential free NO relay contact with safety galvanic isolation
Nominal current: 16 A (cos ϕ = 1)
3-wire connection
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
	3292U-A00003	2CHU910003A4000	1

Universal thermostat, control unit

For use only in conjunction with switching unit insert for thermostats or timers (Art. No. 3292U-A00003)
Option to choose regulation of room temperature or heated floor temperature, as well as combined
Regulated temperature: 0 °C to +50 °C
Operation mode: manual, automatic, holiday, 3 time programs (each 70 marks each – min. interval 5 min; days of week 1, 2..., 7, 1-5, 6-7, 1-7)
Prediction function
Software switch-off
Choice of heating or cooling mode
Min. and max. floor temperature
Limits for adjustable temperature
Temperature offset
Optional response to control by external contact
Anti-freeze protection
Valves protection
Inversion of output function
Operating hours counter
Automatic summer/winter time change
Push-buttons lock
Adaptive control
Display brightness and contrast adjustment
Temperature selection sensor
Language selection: Russian, English, Czech
Power reserve: approx. 90 days (rechargeable Li cell)
The display is lit only when supplied with 230 V ~
Operating temperature: 0 °C to +50 °C
Floor temperature sensor (Art. No. 3292U-A90100) must be ordered separately

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3292H-A10301 01**	2CHH911031A4001	1
White/White	**3292H-A10301 03**	2CHH911031A4003	1
Grey/White	**3292H-A10301 16**	2CHH911031A4016	1
Ivory/White	**3292H-A10301 17**	2CHH911031A4017	1
Macchiato/White	**3292H-A10301 18**	2CHH911031A4018	1
White/ Smoke black	**3292H-A10301 62**	2CHH911031A4062	1
Anthracite/ Smoke Black	**3292H-A10301 63**	2CHH911031A4063	1
Yellow/ Smoke black	**3292H-A10301 64**	2CHH911031A4064	1
Red/ Smoke black	**3292H-A10301 65**	2CHH911031A4065	1
Orange/ Smoke black	**3292H-A10301 66**	2CHH911031A4066	1
Green/ Smoke black	**3292H-A10301 67**	2CHH911031A4067	1
Pearl/ Ice White	**3292H-A10301 68**	2CHH911031A4068	1
Steel/ Smoke black	**3292H-A10301 69**	2CHH911031A4069	1
Silver/ Smoke black	**3292H-A10301 70**	2CHH911031A4070	1

Levit®
Thermostats

Floor heating temperature sensor

For universal thermostat with rotary knob and programmable thermostat
Sensor element: PTC thermistor,
Resistance: 2 kOhm at 25 °C
Cable: PVC, 4 m
Conductors: 2 × 0,352
Cable head: metal, ø 6 × 18 mm
IP54

Colour	Type	Order code	Pack/Qty.
	3292U-A90100	2CHU919010A4000	1

Cover plate for thermostat



For insert: 2TKA00004033
If installing into a separate 1gang frame, please use the specialized frames with a 55 × 55 internal window
(Art. No. 3901H-A05510 ..)
If installing into a multigang frame, use standard frames with the corresponding number of gangs (Art. No. 3901H-A050..) along
with specialized cover plates with a 55 × 55 internal window (Art. No. 3901H-A00..55..):
external or internal depending on the position of the insert in the frame.
Also available: 2gang frames with a 55 × 55 internal window (Art. No. 3901H-A05520 ..)

Colour	Type	Order code	Pack/Qty.
White	**3299H-A40100 03**	2CHH704010A4003	5
Grey	**3299H-A40100 16**	2CHH704010A4016	5
Ivory	**3299H-A40100 17**	2CHH704010A4017	5
Macchiato	**3299H-A40100 18**	2CHH704010A4018	5
Anthracite	**3299H-A40100 64**	2CHH704010A4064	5
Yellow	**3299H-A40100 65**	2CHH704010A4065	5
Red	**3299H-A40100 66**	2CHH704010A4066	5
Orange	**3299H-A40100 67**	2CHH704010A4067	5
Green	**3299H-A40100 63**	2CHH704010A4063	5
Pearl	**3299H-A40100 68**	2CHH704010A4068	5
Steel	**3299H-A40100 69**	2CHH704010A4069	5
Silver	**3299H-A40100 70**	2CHH704010A4070	5

Levit®
Timers

Relay switch for timers

For programmable time switch
(Art. No. 3292H-A20301 ..)
Option to connect voltage free contact
for remote control.
In the event of power failure the control unit
display goes off.
Operating temperature: 0 °C to + 50 °C
Output: with galvanic isolation dry relay contact
2,300 W for resistive load (AC-1),
750 W for incandescent lamps
350 V for ballast units with control 1-10 V
(for example, incandescent lamps or LEDs)
3-wire connection
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
	3292U-A00013	2CHU910013A4000	1

Programmable timer

For use only in conjunction with
relay switch (Art. No. 3292U-A00013)
Operation mode: manual, automatic,
automatic Astro, timer, holiday, 3 time programs
(70 time marks each – min. interval
5 min; days of week 1, 2..., 7, 1-5, 6-7, 1-7)
Software switch-off
Astro function (geographic coordinates, time
zone, sunrise and sunset adjustment)
Optional response to control by external contact
Inversion of output function
Operating hours counter
Automatic winter/summer time change
Room temperature indication
Push-buttons lock
Display brightness
and contrast adjustment
Language selection: Russian, English, Czech
Power reserve: approx. 90 days (rechargeable Li cell)
The display is lit only when supplied with 230 V ~
Operating temperature: 0 ° C to + 50 ° C

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3292H-A20301 01**	2CHH912031A4001	1
White/White	**3292H-A20301 03**	2CHH912031A4003	1
Grey/White	**3292H-A20301 16**	2CHH912031A4016	1
Ivory/White	**3292H-A20301 17**	2CHH912031A4017	1
Macchiato/White	**3292H-A20301 18**	2CHH912031A4018	1
White/ Smoke black	**3292H-A20301 62**	2CHH912031A4062	1
Anthracite/ Smoke Black	**3292H-A20301 64**	2CHH912031A4064	1
Yellow/ Smoke black	**3292H-A20301 65**	2CHH912031A4065	1
Red/ Smoke black	**3292H-A20301 66**	2CHH912031A4066	1
Orange/ Smoke black	**3292H-A20301 67**	2CHH912031A4067	1
Green/ Smoke black	**3292H-A20301 63**	2CHH912031A4063	1
Pearl/ Ice White	**3292H-A20301 68**	2CHH912031A4068	1
Steel/ Smoke black	**3292H-A20301 69**	2CHH912031A4069	1
Silver/ Smoke black	**3292H-A20301 70**	2CHH912031A4070	1

Short-time timer insert

Busch-Jaeger insert
Countdown timer. For use with Levit cover plate Art.
No. 3299H-A40100 ..
For time-programmed switching off. of electrical
consumers. With push-buttons. Min. switch-off
delay: 1 second. Max. switch-off delay: 9:59:59 hours
Nominal voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 1 Normally open contact
Nominal current: 10 A / cos ϕ 1. Nominal power: 2300 VA
Operating temperature: 0 °C to 35 °C

Colour	Type	Order code	Pack/Qty.
	6465 U-101-500	2CKA006410A0393	1

CO_2 Busch Raumluftsensor® room sensor

Busch-Jaeger insert
For controlling the incoming fresh air in rooms
by means of opening or switching of windows/fans.
For use with Levit cover plate Art. No. 3299H-A40100 ..
With display for carbon dioxide, humidity,
temperature and air pressure.
Setting values: carbon dioxide 800 ppm ...
1500 ppm, humidity 40% – 95%.
With two zero-potential relay contacts.
Nominal voltage: 230 V~
Nominal current 6 A cos ϕ = 1
Without claw fixation

Colour	Type	Order code	Pack/Qty.
	1091 U-500	2CKA001032A0518	1

Cover plate for Short-time timer / CO_2 sensor



For Busch-Jaeger inserts:
- Comfort timer control element 2CKA006410A0399
- Short-time timer insert 2CKA006410A0393
- CO_2 Busch Raumluftsensor® room sensor 2CKA001032A0518

If installing into a separate 1gang frame, please use
the specialized frames with a 55 × 55 internal window
(Art. No. 3901H-A05510 ..)
If installing into a multigang frame, use standard
frames with the corresponding number of gangs
(Art. No. 3901H-A050..) along with specialized
cover plates with internal window 55 × 55
(Art. No. 3901H-A00..55..): external or internal
depending on the position of the insert in the frame.
Also available: 2gang frames with a 55 × 55 internal
window (Art. No. 3901H-A05520 ..)

Colour	Type	Order code	Pack/Qty.
White	**3299H-A40100 03**	2CHH704010A4003	5
Grey	**3299H-A40100 16**	2CHH704010A4016	5
Ivory	**3299H-A40100 17**	2CHH704010A4017	5
Macchiato	**3299H-A40100 18**	2CHH704010A4018	5
Anthracite	**3299H-A40100 63**	2CHH704010A4063	5
Yellow	**3299H-A40100 64**	2CHH704010A4064	5
Red	**3299H-A40100 65**	2CHH704010A4065	5
Orange	**3299H-A40100 66**	2CHH704010A4066	5
Green	**3299H-A40100 67**	2CHH704010A4067	5
Pearl	**3299H-A40100 68**	2CHH704010A4068	5
Steel	**3299H-A40100 69**	2CHH704010A4069	5
Silver	**3299H-A40100 70**	2CHH704010A4070	5

Levit®
Movement detectors

Relay switch for movement detector insert

For motion detectors Art. No. 3299H-A02182 ..
Operating temperature: -10 °C to +55 °C
2,300 V for incandescent lamps, 1,750 V for low-voltage halogen lamps with conventional or electronic transformers.
500 VA / 64 mFd for fluorescent lamps
3-wire connection
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
	3299U-A00006	2CHU700006A4000	1

2-channel relay switch for movement detector

For motion detectors Art. No. 3299H-A02182 ..
Contact 2 is closed approx.
3 min after contact
1 is closed when movement is detected
Contact 2 opens approx.
5 min after contact 1 is opened
Operating temperature: -10 °C to +55 °C
Nominal current: 3 A (cos ϕ > 0.8)
For compact fluorescent lamps (energy saving lamps) and LED lights
4-wire connection
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
	3299U-A00007	2CHU700007A4000	1

TRIAC movement detector insert

For motion detectors Art. No. 3299H-A02182 ..
Brightness is dimmed 5 seconds before switch-off
(only when switch-off delay is set to > 30 seconds)
Operating temperature: -10 °C to +55 °C
40 – 300 W for incandescent lamps
No parallel connection possible
2-wire connection
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
	3299U-A00001	2CHU700001A4000	1

Movement detector

For the following inserts:
- relay switch for motion detector 2CHU700006A4000
- 2-channel relay switch for motion detector 2CHU700007A4000
- TRIAC for motion detector 2CHU700001A4000

Detection range: 180°
Adjustable setting on the back of the cover panel: illuminance (1-1000 Lx), sensitivity, switch-off delay
(5 seconds - 10 minutes, or 15/30/45/60 minutes after pressing in-built button)

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3299H-A02182 01**	2CHH702182A4001	1
White/White	**3299H-A02182 03**	2CHH702182A4003	1
Grey/White	**3299H-A02182 16**	2CHH702182A4016	1
Ivory/White	**3299H-A02182 17**	2CHH702182A4017	1
Macchiato/White	**3299H-A02182 18**	2CHH702182A4018	1
White/ Smoke black	**3299H-A02182 62**	2CHH702182A4062	1
Anthracite/ Smoke Black	**3299H-A02182 63**	2CHH702182A4063	1
Yellow/ Smoke black	**3299H-A02182 64**	2CHH702182A4064	1
Red/ Smoke black	**3299H-A02182 65**	2CHH702182A4065	1
Orange/ Smoke black	**3299H-A02182 66**	2CHH702182A4066	1
Green/ Smoke black	**3299H-A02182 67**	2CHH702182A4067	1
Pearl/ Ice White	**3299H-A02182 68**	2CHH702182A4068	1
Steel/ Smoke black	**3299H-A02182 69**	2CHH702182A4069	1
Silver/ Smoke black	**3299H-A02182 70**	2CHH702182A4070	1

Levit®
Blind control elements

Blind switch with locking keys

Individual packaging for retail
With mechanical button interlock
Nominal voltage: 250 V ~
Nominal current: 10 AX
Screwless terminals

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3559H-A89445 01W**	2CHH598945A6001	15
White/White	**3559H-A89445 03W**	2CHH598945A6003	15
Grey/White	**3559H-A89445 16W**	2CHH598945A6016	15
Ivory/White	**3559H-A89445 17W**	2CHH598945A6017	15
Macchiato/White	**3559H-A89445 18W**	2CHH598945A6018	15
White/ Smoke black	**3559H-A89445 62W**	2CHH598945A6062	15
Anthracite/ Smoke Black	**3559H-A89445 63W**	2CHH598945A6063	15
Yellow/ Smoke black	**3559H-A89445 64W**	2CHH598945A6064	15
Red/ Smoke black	**3559H-A89445 65W**	2CHH598945A6065	15
Orange/ Smoke black	**3559H-A89445 66W**	2CHH598945A6066	15
Green/ Smoke black	**3559H-A89445 67W**	2CHH598945A6067	15
Pearl/ Ice White	**3559H-A89445 68W**	2CHH598945A6068	15
Steel/ Smoke black	**3559H-A89445 69W**	2CHH598945A6069	15
Silver/ Smoke black	**3559H-A89445 70W**	2CHH598945A6070	15

Blind switch without locking keys

Individual packaging for retail
With mechanical button interlock
Nominal voltage: 250 V ~
Nominal current: 10 A
Screwless terminals

White/Ice white	**3559H-A88445 01W**	2CHH598845A6001	15
White/White	**3559H-A88445 03W**	2CHH598845A6003	15
Grey/White	**3559H-A88445 16W**	2CHH598845A6016	15
Ivory/White	**3559H-A88445 17W**	2CHH598845A6017	15
Macchiato/White	**3559H-A88445 18W**	2CHH598845A6018	15
White/ Smoke black	**3559H-A88445 62W**	2CHH598845A6062	15
Anthracite/ Smoke Black	**3559H-A88445 63W**	2CHH598845A6063	15
Yellow/ Smoke black	**3559H-A88445 64W**	2CHH598845A6064	15
Red/ Smoke black	**3559H-A88445 65W**	2CHH598845A6065	15
Orange/ Smoke black	**3559H-A88445 66W**	2CHH598845A6066	15
Green/ Smoke black	**3559H-A88445 67W**	2CHH598845A6067	15
Pearl/ Ice White	**3559H-A88445 68W**	2CHH598845A6068	15
Steel/ Smoke black	**3559H-A88445 69W**	2CHH598845A6069	15
Silver/ Smoke black	**3559H-A88445 70W**	2CHH598845A6070	15

Levit®

Blind control elements

Busch-Jalousiecontrol®II control element

For Busch-Jalousiecontrol® II insert
2CKA006410A0378

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3299H-A00110 01**	2CHH700110A4001	1
White/White	**3299H-A00110 03**	2CHH700110A4003	1
Grey/White	**3299H-A00110 16**	2CHH700110A4016	1
Ivory/White	**3299H-A00110 17**	2CHH700110A4017	1
Macchiato/White	**3299H-A00110 18**	2CHH700110A4018	1
White/ Smoke black	**3299H-A00110 62**	2CHH700110A4062	1
Anthracite/ Smoke Black	**3299H-A00110 63**	2CHH700110A4063	1
Yellow/ Smoke black	**3299H-A00110 64**	2CHH700110A4064	1
Red/ Smoke black	**3299H-A00110 65**	2CHH700110A4065	1
Orange/ Smoke black	**3299H-A00110 66**	2CHH700110A4066	1
Green/ Smoke black	**3299H-A00110 67**	2CHH700110A4067	1
Pearl/ Ice White	**3299H-A00110 68**	2CHH700110A4068	1
Steel/ Smoke black	**3299H-A00110 69**	2CHH700110A4069	1
Silver/ Smoke black	**3299H-A00110 70**	2CHH700110A4070	1

Cover plate for comfort timer control element, count-down timer and CO_2 sensor.

For Busch-Jaeger inserts:
- Countdown timer
  2CKA006410A0393
- CO_2 room sensor
  2CKA001032A0518

If installing into a separate 1gang frame, please use the specialized frames with a 55 × 55 internal window (Art. No. 3901H-A05510 ..)
If installing into a multigang frame, use standard frames with the corresponding number of gangs (Art. No. 3901H-A050..) along with specialized cover plates with internal window 55 × 55
(Art. No. 3901H-A00..55..): external or internal depending on the position of the insert in the frame.
Also available: 2gang frames with a 55 × 55 internal window (Art. No. 3901H-A05520 ..)

Colour	Type	Order code	Pack/Qty.
White	**3299H-A40100 03**	2CHH704010A4003	1
Grey	**3299H-A40100 16**	2CHH704010A4016	1
Ivory	**3299H-A40100 17**	2CHH704010A4017	1
Macchiato	**3299H-A40100 18**	2CHH704010A4018	1
Anthracite	**3299H-A40100 63**	2CHH704010A4063	1
Yellow	**3299H-A40100 64**	2CHH704010A4064	1
Red	**3299H-A40100 65**	2CHH704010A4065	1
Orange	**3299H-A40100 66**	2CHH704010A4066	1
Green	**3299H-A40100 67**	2CHH704010A4067	1
Pearl	**3299H-A40100 68**	2CHH704010A4068	1
Steel	**3299H-A40100 69**	2CHH704010A4069	1
Silver	**3299H-A40100 70**	2CHH704010A4070	1

Levit®
Illumination

LED illumination insert

Built-in depth: 25 mm
Screw-type terminals.
Nominal current: 10 mA
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
White	**3917U-A00050**	2CHU640050A4000	1
Blue	**3917U-A00051**	2CHU640051A4000	1
Green	**3917U-A00052**	2CHU640052A4000	1
Red	**3917U-A00053**	2CHU640053A4000	1

Indication and orientation LED illumination insert with infrapassive senzor

Installation depth: 25 mm
Screw-type terminals.
Fixation via screws only.
Switch-off delay: 1min
Threshold lighting : 10lx
12 mA, 230 V AC

Colour	Type	Order code	Pack/Qty.
White light	**3299U-A52500**	2CHU705250A4000	1

LED illumination cover plate

LED illumination cover plate

Colour	Type	Order code	Pack/Qty.
White	**5016H-A00070 03**	2CHH660070A4003	5
Grey	**5016H-A00070 16**	2CHH660070A4016	5
Ivory	**5016H-A00070 17**	2CHH660070A4017	5
Macchiato	**5016H-A00070 18**	2CHH660070A4018	5
Anthracite	**5016H-A00070 63**	2CHH660070A4063	5
Yellow	**5016H-A00070 64**	2CHH660070A4064	5
Red	**5016H-A00070 65**	2CHH660070A4065	5
Orange	**5016H-A00070 66**	2CHH660070A4066	5
Green	**5016H-A00070 67**	2CHH660070A4067	5
Pearl	**5016H-A00070 68**	2CHH660070A4068	5
Steel	**5016H-A00070 69**	2CHH660070A4069	5
Silver	**5016H-A00070 70**	2CHH660070A4070	5

Lighting insert LED, 0.5 mA

To provide orientation light for button switches and push-switches in the Levit range
The LED collar is red
Nominal current: 0.5 mA
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
White	**3916-05444**	2CHU165444C4000	10
Blue	**3916-05445**	2CHU165445C4000	10
Red	**3916-05443**	2CHU165443A4000	10

Lighting insert LED, 1 mA

To provide control light for button switches and push-switches in the Levit range
The LED collar is yellow
Nominal current: 0.5 mA
Nominal voltage: 230 V ~

Colour	Type	Order code	Pack/Qty.
White	**3916-10444**	2CHU161444C4000	10

Blind cover

For communication insert mounting plates (Art. No. 5014H-A01018 ..)

Colour	Type	Order code	Pack/Qty.
Grey	**1116412-3**	1116412-3	25

Levit®

Frames and blind covers

Blind cover

Individual packaging for retail

Colour	Type	Order code	Pack/Qty.
White	**3902H-A00001 03W**	2CHH050001A6003	50
Grey	**3902H-A00001 16W**	2CHH050001A6016	50
Ivory	**3902H-A00001 17W**	2CHH050001A6017	50
Macchiato	**3902H-A00001 18W**	2CHH050001A6018	50
Anthracite	**3902H-A00001 63W**	2CHH050001A6063	50
Yellow	**3902H-A00001 64W**	2CHH050001A6064	50
Red	**3902H-A00001 65W**	2CHH050001A6065	50
Orange	**3902H-A00001 66W**	2CHH050001A6066	50
Green	**3902H-A00001 67W**	2CHH050001A6067	50
Pearl	**3902H-A00001 68W**	2CHH050001A6068	50
Steel	**3902H-A00001 69W**	2CHH050001A6069	50
Silver	**3902H-A00001 70W**	2CHH050001A6070	50

2gang frame

Individual packaging for retail
For horizontal or vertical mounting

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3901H-A05020 01W**	2CHH015020A6001	30
White/White	**3901H-A05020 03W**	2CHH015020A6003	30
Grey/White	**3901H-A05020 16W**	2CHH015020A6016	30
Ivory/White	**3901H-A05020 17W**	2CHH015020A6017	30
Macchiato/White	**3901H-A05020 18W**	2CHH015020A6018	30
White/ Smoke black	**3901H-A05020 62W**	2CHH015020A6062	30
Anthracite/ Smoke Black	**3901H-A05020 63W**	2CHH015020A6063	30
Yellow/ Smoke black	**3901H-A05020 64W**	2CHH015020A6064	30
Red/ Smoke black	**3901H-A05020 65W**	2CHH015020A6065	30
Orange/ Smoke black	**3901H-A05020 66W**	2CHH015020A6066	30
Green/ Smoke black	**3901H-A05020 67W**	2CHH015020A6067	30
Pearl/ Ice White	**3901H-A05020 68W**	2CHH015020A6068	30
Steel/ Smoke black	**3901H-A05020 69W**	2CHH015020A6069	30
Silver/ Smoke black	**3901H-A05020 70W**	2CHH015020A6070	30

1gang frame

Individual packaging for retail

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3901H-A05010 01W**	2CHH015010A6001	30
White/White	**3901H-A05010 03W**	2CHH015010A6003	30
Grey/White	**3901H-A05010 16W**	2CHH015010A6016	30
Ivory/White	**3901H-A05010 17W**	2CHH015010A6017	30
Macchiato/White	**3901H-A05010 18W**	2CHH015010A6018	30
White/ Smoke black	**3901H-A05010 62W**	2CHH015010A6062	30
Anthracite/ Smoke Black	**3901H-A05010 63W**	2CHH015010A6063	30
Yellow/ Smoke black	**3901H-A05010 64W**	2CHH015010A6064	30
Red/ Smoke black	**3901H-A05010 65W**	2CHH015010A6065	30
Orange/ Smoke black	**3901H-A05010 66W**	2CHH015010A6066	30
Green/ Smoke black	**3901H-A05010 67W**	2CHH015010A6067	30
Pearl/ Ice White	**3901H-A05010 68W**	2CHH015010A6068	30
Steel/ Smoke black	**3901H-A05010 69W**	2CHH015010A6069	30
Silver/ Smoke black	**3901H-A05010 70W**	2CHH015010A6070	30

3gang frame

Individual packaging for retail
For horizontal or vertical mounting

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3901H-A05030 01W**	2CHH015030A6001	15
White/White	**3901H-A05030 03W**	2CHH015030A6003	15
Grey/White	**3901H-A05030 16W**	2CHH015030A6016	15
Ivory/White	**3901H-A05030 17W**	2CHH015030A6017	15
Macchiato/White	**3901H-A05030 18W**	2CHH015030A6018	15
White/ Smoke black	**3901H-A05030 62W**	2CHH015030A6062	15
Anthracite/ Smoke Black	**3901H-A05030 63W**	2CHH015030A6063	15
Yellow/ Smoke black	**3901H-A05030 64W**	2CHH015030A6064	15
Red/ Smoke black	**3901H-A05030 65W**	2CHH015030A6065	15
Orange/ Smoke black	**3901H-A05030 66W**	2CHH015030A6066	15
Green/ Smoke black	**3901H-A05030 67W**	2CHH015030A6067	15
Pearl/ Ice White	**3901H-A05030 68W**	2CHH015030A6068	15
Steel/ Smoke black	**3901H-A05030 69W**	2CHH015030A6069	15
Silver/ Smoke black	**3901H-A05030 70W**	2CHH015030A6070	15

Levit®

Frames and blind covers

4gang frame

Individual packaging for retail
For horizontal or vertical mounting

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3901H-A05040 01W**	2CHH015040A6001	15
White/White	**3901H-A05040 03W**	2CHH015040A6003	15
Grey/White	**3901H-A05040 16W**	2CHH015040A6016	15
Ivory/White	**3901H-A05040 17W**	2CHH015040A6017	15
Macchiato/White	**3901H-A05040 18W**	2CHH015040A6018	15
White/ Smoke black	**3901H-A05040 62W**	2CHH015040A6062	15
Anthracite/ Smoke Black	**3901H-A05040 63W**	2CHH015040A6063	15
Yellow/ Smoke black	**3901H-A05040 64W**	2CHH015040A6064	15
Red/ Smoke black	**3901H-A05040 65W**	2CHH015040A6065	15
Orange/ Smoke black	**3901H-A05040 66W**	2CHH015040A6066	15
Green/ Smoke black	**3901H-A05040 67W**	2CHH015040A6067	15
Pearl/ Ice White	**3901H-A05040 68W**	2CHH015040A6068	15
Steel/ Smoke black	**3901H-A05040 69W**	2CHH015040A6069	15
Silver/ Smoke black	**3901H-A05040 70W**	2CHH015040A6070	15

5gang frame

Individual packaging for retail
For horizontal or vertical mounting

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3901H-A05050 01W**	2CHH015050A6001	15
White/White	**3901H-A05050 03W**	2CHH015050A6003	15
Grey/White	**3901H-A05050 16W**	2CHH015050A6016	15
Ivory/White	**3901H-A05050 17W**	2CHH015050A6017	15
Macchiato/White	**3901H-A05050 18W**	2CHH015050A6018	15
White/ Smoke black	**3901H-A05050 62W**	2CHH015050A6062	15
Anthracite/ Smoke Black	**3901H-A05050 63W**	2CHH015050A6063	15
Yellow/ Smoke black	**3901H-A05050 64W**	2CHH015050A6064	15
Red/ Smoke black	**3901H-A05050 65W**	2CHH015050A6065	15
Orange/ Smoke black	**3901H-A05050 66W**	2CHH015050A6066	15
Green/ Smoke black	**3901H-A05050 67W**	2CHH015050A6067	15
Pearl/ Ice White	**3901H-A05050 68W**	2CHH015050A6068	15
Steel/ Smoke black	**3901H-A05050 69W**	2CHH015050A6069	15
Silver/ Smoke black	**3901H-A05050 70W**	2CHH015050A6070	15

1gang frame, 55×55

Only for the following
Busch-Jaeger inserts:
- Short-time timer or comfort timer control element
- CO_2 room sensor
- Busch Btconnect Radio
- Busch-DigitalRadio
- Busch iNet Radio
- Loudspeaker

Standard Levit frames with internal window 50×50 are not compatible with the inserts listed above

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3901H-A05510 01**	2CHH015510A4001	20
White/White	**3901H-A05510 03**	2CHH015510A4003	20
Grey/White	**3901H-A05510 16**	2CHH015510A4016	20
Ivory/White	**3901H-A05510 17**	2CHH015510A4017	20
Macchiato/White	**3901H-A05510 18**	2CHH015510A4018	20
White/ Smoke black	**3901H-A05510 62**	2CHH015510A4062	20
Anthracite/ Smoke Black	**3901H-A05510 63**	2CHH015510A4063	20
Yellow/ Smoke black	**3901H-A05510 64**	2CHH015510A4064	20
Red/ Smoke black	**3901H-A05510 65**	2CHH015510A4065	20
Orange/ Smoke black	**3901H-A05510 66**	2CHH015510A4066	20
Green/ Smoke black	**3901H-A05510 67**	2CHH015510A4067	20
Pearl/ Ice White	**3901H-A05510 68**	2CHH015510A4068	20
Steel/ Smoke black	**3901H-A05510 69**	2CHH015510A4069	20
Silver/ Smoke black	**3901H-A05510 70**	2CHH015510A4070	20

2gang frame, 55×55

For use when
two Busch-Jaeger inserts (any of the following) need to be installed in a 2gang frame:
- Short-time timer or comfort timer control element
- CO_2 room sensor
- Busch Btconnect Radio
- Busch-DigitalRadio
- Busch iNet Radio
- Loudspeaker

Standard Levit frames with internal window 50×50 are not compatible with the inserts listed above

Colour	Type	Order code	Pack/Qty.
White/Ice white	**3901H-A05520 01**	2CHH015520A4001	10
White/White	**3901H-A05520 03**	2CHH015520A4003	10
Grey/White	**3901H-A05520 16**	2CHH015520A4016	10
Ivory/White	**3901H-A05520 17**	2CHH015520A4017	10
Macchiato/White	**3901H-A05520 18**	2CHH015520A4018	10
White/ Smoke black	**3901H-A05520 62**	2CHH015520A4062	10
Anthracite/ Smoke Black	**3901H-A05520 63**	2CHH015520A4063	10
Pearl/ Ice White	**3901H-A05520 68**	2CHH015520A4068	10
Steel/ Smoke black	**3901H-A05520 69**	2CHH015520A4069	10
Silver/ Smoke black	**3901H-A05520 70**	2CHH015520A4070	10

Levit®

Frames and blind covers

Cover plate for 55×55 frame, external

Used to expand the internal window of a standard multigang Levit frame to 55×55. When of the inserts in a multigang installation is a Busch-Jaeger insert:
- Short-time timer or comfort timer control element
- CO_2 room sensor
- Busch Btconnect Radio
- Busch-DigitalRadio
- Busch iNet Radio
- Loudspeaker

This product is for cases where the Busch-Jaeger insert is on the outside edge.

Colour	Type	Order code	Pack/Qty.
White	**3901H-A00255 03**	2CHH010255A4003	20
Grey	**3901H-A00255 16**	2CHH010255A4016	20
Ivory	**3901H-A00255 17**	2CHH010255A4017	20
Macchiato	**3901H-A00255 18**	2CHH010255A4018	20
Yellow	**3901H-A00255 64**	2CHH010255A4064	20
Red	**3901H-A00255 65**	2CHH010255A4065	20
Orange	**3901H-A00255 66**	2CHH010255A4066	20
Green	**3901H-A00255 67**	2CHH010255A4067	20
Anthracite	**3901H-A00255 63**	2CHH010255A4063	20
Pearl	**3901H-A00255 68**	2CHH010255A4068	20
Steel	**3901H-A00255 69**	2CHH010255A4069	20
Silver	**3901H-A00255 70**	2CHH010255A4070	20

Cover plate for 55×55 frame, intermediate

Used to expand the internal window of a standard multigang Levit frame to 55×55. When of the inserts in a multigang installation is a Busch-Jaeger insert:
- Short-time timer or comfort timer control element
- CO_2 room sensor
- Busch Btconnect Radio
- Busch-DigitalRadio
- Busch iNet Radio
- Loudspeaker

This product is for cases where the Busch-Jaeger insert is intermediate (middle)

Colour	Type	Order code	Pack/Qty.
White	**3901H-A00355 03**	2CHH010355A4003	20
Grey	**3901H-A00355 16**	2CHH010355A4016	20
Ivory	**3901H-A00355 17**	2CHH010355A4017	20
Macchiato	**3901H-A00355 18**	2CHH010355A4018	20
Yellow	**3901H-A00355 64**	2CHH010355A4064	20
Red	**3901H-A00355 65**	2CHH010355A4065	20
Orange	**3901H-A00355 66**	2CHH010355A4066	20
Green	**3901H-A00355 67**	2CHH010355A4067	20
Anthracite	**3901H-A00355 63**	2CHH010355A4063	20
Pearl	**3901H-A00355 68**	2CHH010355A4068	20
Steel	**3901H-A00355 69**	2CHH010355A4069	20
Silver	**3901H-A00355 70**	2CHH010355A4070	20

Swing®L
Understated beauty

A modest combination of colours and white. A modern square design. A compelling offer of light switches and socket outlets for your daring reconstruction plans. Easy fitting thanks to their flat installation depth. Find fun in the functional.

01 white / white
02 white / light grey
03 white / creamy
04 white / mocca
05 white / brick colour

Ideal for blocks of flats and refurbishment projects, due to the small installation depth

Swing®L

Selected functions.

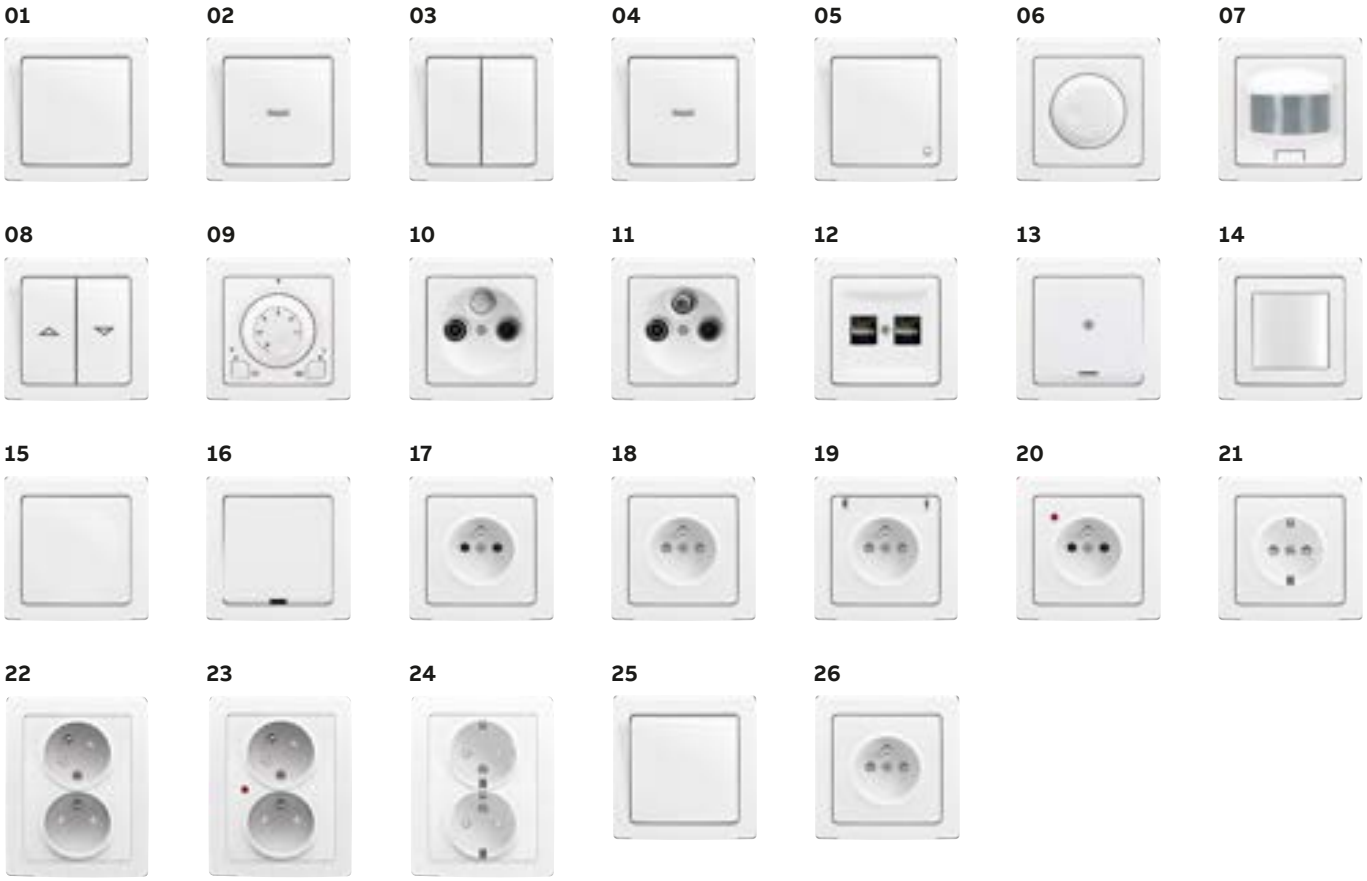

01 Rocker switch 1-gang
02 Rocker switch 1-gang, with indication or orientation neon lamp
03 Rocker switch 2-gang
04 Push switch 1-gang, with indication or orientation neon lamp
05 Push switch with bell symbol
06 Dimmer with rotary control
07 Flush-mounted movement detector
08 Push switch / blind control switch
09 Thermostat with rotary temperature setting
10 Antenna socket for TV / radio
11 Antenna socket for TV / radio / satellite
12 Data communication outlet 2-gang
13 Telephone connection unit
14 Illumination LED unit
15 Blank cover
16 Cable outlet
17 Socket outlet with earthing pin
18 Socket outlet with earthing pin, shuttered
19 Socket outlet with earthing pin, shuttered, with labelling field
20 Socket outlet with earthing pin, with surge protection
21 SCHUKO® socket outlet
22 Double socket outlet with earth. pins
23 Double socket outlet with earthing pins, with surge protection
24 Double SCHUKO® socket outlet
25 IP 44 rocker switch, 1-gang
26 IP 44 socket outlet with earth. pins

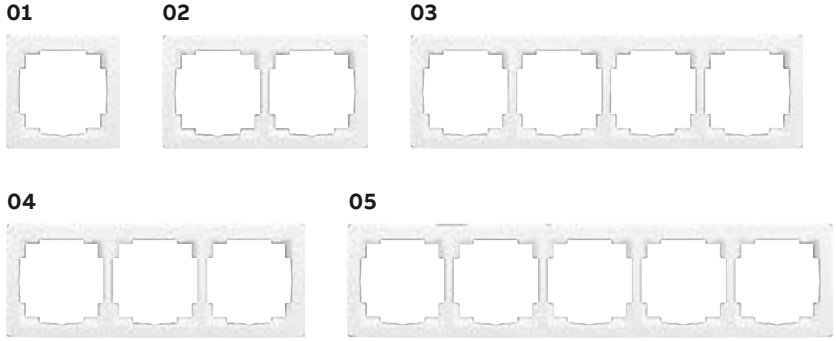

1- to 5-gang cover frame for horizontal and vertical installation
01 85 mm x 85 mm
02 85 mm x 156 mm
03 85 mm x 227 mm
04 85 mm x 298 mm
05 85 mm x 369 mm

For more information about light switch ranges visit ABB global web sites.

Swing®L

Rocker switches / push switches

Switch with central plates, 1-gang 1-way

With optional illumination.
Screw-type terminals.
Fixation via screws or claws.
10 AX, 250 V AC

Colour	Type	Order code	Pack/Qty.
White		2CHG570144A6520	20

Switch with central plates, 1-gang 2-way

With optional illumination.
Screw-type terminals.
Fixation via screws or claws.
10 AX, 250 V AC

Colour	Type	Order code	Pack/Qty.
White		2CHG570644A6520	20

Switch with central plates, intermediate

With optional illumination.
Screw-type terminals.
Fixation via screws.
10 AX, 250 V AC

Colour	Type	Order code	Pack/Qty.
White		2CHG570734C6520	20

Switch with central plates, DP 1-gang 1-way

Screw-type terminals.
Fixation via screws.
10 AX, 250 V AC

Colour	Type	Order code	Pack/Qty.
White		2CHG570236A4520	20

Switch with central plates, 2-gang 1-way

Screw-type terminals.
Fixation via screws or claws.
10 AX, 250 V AC

Colour	Type	Order code	Pack/Qty.
White		2CHG570544A6520	20

Switch with central plates, 2-gang 2-way

Screw-type terminals.
Fixation via screws.
10 AX, 250 V AC

Colour	Type	Order code	Pack/Qty.
White		2CHG570236A4520	20

Push Switch with central plate, 1-gang 1 -way

With optional illumination.
Screw-type terminals.
Fixation via screws.
10 A, 250 V AC

Colour	Type	Order code	Pack/Qty.
White		2CHG579135C6520	20

Push Switch with N terminal 1-gang 1-way, with N terminal

With optional illumination.
Screw-type terminals.
Fixation via screws.
10 A, 250 V AC

Colour	Type	Order code	Pack/Qty.
White		2CHG579135C6520	20

Push-switch with central plate with bell symbol, 1 -gang 1 -way

Screw type terminals.
Fixation via screws.
10A, 250 V AC

Colour	Type	Order code	Pack/Qty.
White		2CHG578037A4520	20

Push switch with central plates, 2-gang 1-way

Screw-type terminals.
Fixation via screws.
10 A, 250 V AC

Colour	Type	Order code	Pack/Qty.
White		2CHG578734A4520	20

Swing®L

Rocker switches / push switches

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7]
Flush-mounted, LED, 2-100 W

With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi). For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers. For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
Via mode switch adjustable between leading edge control and trailing edge control.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
With adjustable minimum brightness.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10%
Rated frequency: 50 Hz/60 Hz
Nominal power: 2 - 100 W/VA (retrofit LED loads).
Nominal power: 10 - 250 W/VA (non-LED loads).
Protection class (Device): IP 20
Temperature range (Device): 0 °C to 35 °CIEC 60669-2-1, British Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6523 U-102-500	2CKA006512A0335	1/10

Busch-rotary dimmer [1] [2] [3] [4] [5] [6] [7]
UP, LED, 2-400 W

Very small installation depth: < 20 mm.
With rotary control, two-way switch and soft-catch.
2-wire connection (neutral conductor not required)
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum/maximum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without cover plate.
Rated voltage: 230 V~, + 10% / - 10%.
Rated frequency: 50 Hz/60 Hz.
Nominal power: 2 - 100 W/VA (leading edge control).
Nominal power: 2 - 400 W/VA (trailing edge control).

Colour	Type	Order code	Pack/Qty.
	6523 UR-104-500	2CKA006512A0354	1/10

[1] Illuminable with neon lamp. Neon lamp included in delivery with cover plate.
[2] In the case of conventional transformers, take ~20% transformer loss into account.
[3] In case of electronic transformers, 5 % transformer losses.
[4] Also applicable for 1gang 2way installations.
[5] Provided with terminal for net disconnection devices.
[6] Only in conjunction with standard flush-mounting boxes according to DIN 49073, Part 1, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[7] Recommendation: Please use loads and types of one producer.

Swing®L
Dimmers

Electronic potentiometer insert for 1 -10 V electronics ballasts, for rotary control and switch-on at minimal brightness level

For ⊐▭⊏ or for LED control via electronic ballast with 1 - 10 V interface.
Max. control current: 50 mA DC
Potential-free contact for switching the ballast power supply. It is recommended to use a relay for more than 5 ballasts.
4 A (cos ϕ = 0.9), 3 A (cos ϕ = 0.5)
700 W/V·A, 230 V AC, 50/60 Hz

Colour	Type	Order code	Pack/Qty.
	2112 U-101	6599-0-2035	1

DALI Power-potentiometer insert, with rotary control and ON/OFF push operation

For central switching and dimming up to 64 DALI devices in accordance with EN 62386. Increased brightness sensitivity setting at slow rotation. Integrated orientation LED illumination (18 colour presets or OFF).
Short-circuit and overload electronic protection.
DALI cable length: max. 300 m (cores' cross section 1.5 to 2.5 mm²).
The brightness level when switched on by brief pressing: the same as it was when last used or pre-selectable. The brightness level when the power supply is restored after power failure: switched off status or pre-selectable (if supported by the DALI device).
In active mode the insert serves as a DALI power supply (15.5 V DC / 75 mA) for up to 37 DALI devices (or for up to 111 DALI devices with 3 power-potentiometers in parallel connection).
In passive mode the insert behaves as an additional control unit.
Parallel interconnection of power-potentiometers: up to 3 pcs in active mode or up to 5 pcs in passive mode.
The insert is not suitable for combination with other DALI sensors.
Power consumption: max. 2.5 W
4-wire connection in active mode, 2-wire connection in passive mode 230 V AC, 50/60 Hz

Colour	Type	Order code	Pack/Qty.
	2117/11 U-500	6599-0-2988	1

DALI potentiometer insert, with rotary control and ON/OFF push operation

For central switching and dimming up to 64 DALI devices in accordance with EN 62386.
Increased brightness sensitivity setting at slow rotation. Integrated orientation LED illumination (18 colour presets or OFF). An additional DALI power supply is needed (e.g. by Tridonic, Philips, Helvar, or the DALI power-potentiometer 6599-0-2988).
Current consumption: 7 - 15 mA
The insert is polarity-reversal proof.
DALI cable length: max. 300 m
(cores' cross section 1.5 to 2.5 mm²)
The brightness level when switched on by brief pressing: the same as it was when last used or pre-selectable.
The brightness level when the power supply is restored after power failure: switched off status or pre-selectable (if supported by the DALI device).
Up to fi ve potentiometers may be connected in parallel.
The insert is not suitable for combination with other DALI sensors.
2-wire connection

Colour	Type	Order code	Pack/Qty.
	2117 U-500	6599-0-2987	1

Cover plate for rotary dimmer [16)]

With fastening nut.
With two types of button
(for 6514-0-0111 and other devices).

Colour	Type	Order code	Pack/Qty.
white		3294G-A00125 B1	5

[16)] Cover illumination with neon lamp or LED is not possible.

Swing®L

Movement detectors

Switch insert for movement detector

Switching element: relay
Operating temperature: –10 °C to +55 °C
2 300 W for ☼, 1 750 V·A for ⫼⊗ ◿⊗,
500 V·A / 64 µF pro ⊐▭⊏ [44)]
For easy connection, terminal N is doubled.
3-wire connection, 230 VAC

Colour	Type	Order code	Pack/Qty.
		3299U-A00006	1

[44)] Also for example, for compact 230 V AC lamps (so-called CFL bulbs) or luminaires with LED.

Switch insert for movement detector

Switching element: 2 relays (relay 2 switches on about 3 min after relay 1 switches on, independently of external lighting; relay 2 switches off about 5 min after relay 1)
Operating temperature: –10 °C to +55 °C
Max. 3 A (cos ϕ > 0,8) [44)]
One spare fuse is inserted in the fuse box.
4-wire connection, 230 VAC

Colour	Type	Order code	Pack/Qty.
		3299U-A00005	1

[44)] Also for example, for compact 230 V AC lamps (so-called CFL bulbs) or luminaires with LED.

Switch insert for movement detector

Switching element: triac
5 s before switching off the brightness is reduced
Operating temperature: –10 °C to +55 °C
40 - 300 W pro ☼
One spare fuse is inserted in the fuse box.
2-wire connection, 230 V AC

Colour	Type	Order code	Pack/Qty.
		3299U-A00001	1

[36)] Parallel connection of devices is not allowed. Can not be used for non-ohmic loads (control coils, fluorescent relays, LEDs, etc.).

Movement detector

Detection angle: approx. 180°
Adjustable values (on the back of the cover): lighting threshold (1 - 1000 lx); sensitivity; switch-off delay (5 sec - 10 min, or 15 / 30 / 45 / 60 min by pressing integrated button)
Operating temperature: –10 °C to +55 °C
Need to be used together with a switch insert for movement detector.

Colour	Type	Order code	Pack/Qty.
white		3299G-A02180 B1	1

Blind control

Blind Shutter switch with central plate [3)]

2-gang 1-way switch
10 AX, 250 V AC
Screwless terminals.
Fixation via screws or claws.

Colour	Type	Order code	Pack/Qty.
white		2CHG578944A6520	20

[3)] A neon lamp or LED cannot be used.

Blind Shutter switch with central plate [3)]

2-gang 1-way push-switch
10 A, 250 V AC
Screwless terminals.
Fixation via screws or claws.

Colour	Type	Order code	Pack/Qty.
white		2CHG578834A4520	20

[3)] A neon lamp or LED cannot be used.

Swing®L
Socket outlets

Socket outlet with earthing pin, shuttered

Screwless terminals
Fixation with screw
IP40
16A, 250 V AC

Colour	Type	Order code	Pack/Qty.
white	**6619G-A06357 B1**	2CHG196357A4520	10

Socket outlet with earthing pin

Screw-type terminals.
Fixation via screws or claws.
16 A, 250 V AC

Colour	Type	Order code	Pack/Qty.
white		5518G-A02449 B1	10

Socket outlet with earthing pin

Individual
Fixation via screw or claws
16A, 250V

Colour	Type	Order code	Pack/Qty.
white	**5518G-A02449 B1W**	2CHG182449A6520	10

Double socket outlet with earthing pins, shuttered, semifl ush-mounted

Screw-type terminals.
Fixation via screws only.
16 A, 250 V AC

Colour	Type	Order code	Pack/Qty.
		5512J-C02259 B1	10

Double socket outlet with earthing pins, shuttered, with turned upper cavity

Screwless terminals.
Fixation via screws only.
IP 40
16 A, 250 V AC

Colour	Type	Order code	Pack/Qty.
white		5513J-C02357 B1	10
white / creamy		5513J-C02357 B1C1	10/1
white / mocca		5513J-C02357 B1C3	10/1
white / light grey		5513J-C02357 B1S1	10/1
white / brick colour		5513J-C02357 B1R3	10/1

Socket outlet with earthing pin, with surge protection

Optical fault signalling.
Screw-type terminals.
Fixation via screws only.
16 A, 230 V AC

Colour	Type	Order code	Pack/Qty.
white		5598G-A02349 B1	1

Double socket outlet with earthing pins, shuttered, with turned upper cavity, with surge protection

Optical fault signalling.
Screwless terminals.
Fixation via screws only.
IP 40
16 A, 230 V AC

Colour	Type	Order code	Pack/Qty.
white		5593J-C02357 B1	1
white / creamy		5593J-C02357 B1C1	1
white / mocca		5593J-C02357 B1C3	1
white / light grey		5593J-C02357 B1S1	1
white / brick colour		5593J-C02357 B1R3	1

Socket outlet with earthing contacts, shuttered

Screw-type terminals.
Fixation via screws or claws.
16 A, 250 V AC
Screwless terminals.
Fixation via screws or claws.
16 A, 250 V AC

Colour	Type	Order code	Pack/Qty.
white	**6620G-A07457 B1**	2CHG207457A4520	10/1

Double socket outlet with earthing contacts, shuttered

Screw-type terminals.
Fixation via screws or claws.
16 A, 250 V AC

Colour	Type	Order code	Pack/Qty.
white		2CHJ123459C6520	10

Swing®L

Socket outlets

Adapter for Profi l 45 inserts

For fl ush mounting of any Profi l 45 device (see pages 254 - 256) into switch ranges. For the assembly it is necessary to use cover plate 5016.-A00070 .. and the cover frame from the desired switch range.

Colour	Type	Order code	Pack/Qty.
		5525U-A00100	5/1

Socket outlet 45×45 with earthing pin

Only for 2× 1.5 mm² or 2× 2.5 mm² conductors.
16 A, 250 V AC

Colour	Type	Order code	Pack/Qty.
white (RAL 9010)		5525N-C02347 B	20
carmine (RAL 3003)		5525N-C02347 R1	20

Data connection

Radio/TV socket outlet insert

– terminal type (article number **EU 3503**)
– loop-through type with 7 dB tap loss (article number **EU 3607**)
– loop-through type with 10 dB tap loss (article number **EU 3610**)
– loop-through type with 14 dB tap loss (article number **EU 3614**)
Nominal impedance of inputs and outputs: 75 Ω
For coaxial cables with a diameter of 3.6 to 6.8 mm.
Fixation via screws or claws.

Colour	Type	Order code	Pack/Qty.
	EU 3503	5011-A3503	1
	EU 3610	5011-A3610	1
	EU 3614	5011-A3614	1

Radio/TV/SAT socket outlet insert

– terminal type (article number **EU 3303**)
Allows passage of a current of 500 mA DC and 22 kHz tone signal for LNB power supply and control.
Nominal impedance of inputs and outputs: 75 Ω
For coaxial cables with a diameter of 3.6 to 6.8 mm.
Fixation via screws or claws.

Colour	Type	Order code	Pack/Qty.
	EU 3303	5011-A3303	1

Cover plate for Radio/TV/SAT socket outlet

Colour	Type	Order code	Pack/Qty.
white		5011G-A00300 B1	10

Loudspeaker terminal

– black differentiation ring
Cross section of connecting wires: max. 4 mm²

Colour	Type	Order code	Pack/Qty.
white		1479190-3	10/1

Loudspeaker terminal

– red differentiation ring
Cross section of connecting wires: max. 4 mm²

Colour	Type	Order code	Pack/Qty.
white		1479191-3	10/1

Swing®L

Data connection

Communication Modular-Jack insert (keystone)

– 8-pole RJ 45-8 Cat. 5e (unshielded)
For mounting in socket fi xing plates and mounting plates (5014A-B101., 5014.-B0101., 1753-0-8055, 136811-1, 1711277-1, 5014G-A01018 .., 5014A-A02018 .., 5014H-A01018 .., 5014K-C01018).

Colour	Type	Order code	Pack/Qty.
		RJ45C5U	10

Data communication outlet 2gang

Connector socket cover
With metal fastening bracket.
For mounting two communication sockets type Modular Jack (keystone), blind plugs or speaker terminals (max. recommended width 18.3 mm).
Hole dimensions: 19.4 x 14.8 mm

Colour	Type	Order code	Pack/Qty.
white		5014G-A02018 B1	10

Data communication outlet 2 gang with RJ45 cat.5 white color

Colour	Type	Order code	Pack/Qty.
white		2CHG295117A6520	

TV socket outlet loop-throught with 7dB tap loss white color

Colour	Type	Order code	Pack/Qty.
white		2CHG083607A6520	

TV socket terminal type with central plate White color

Colour	Type	Order code	Pack/Qty.
white		2CHG083503A6520	

Thermostats, timers

Switching unit insert for thermostats or time switch

Optional connection of external temperature sensor 3292U-A90100 for floor heating. Optional connection of potential free remote control contact (only for programmable control units 3292.-A10301, 3292.-A20301).
Note: In the event of power failure the control unit display goes off.
Operating temperature: 0 °C to +50 °C
Output: potential free NO relay contact with safety galvanic isolation
16 A (cos ϕ = 1), 230 V AC, 3-wire connection

Colour	Type	Order code	Pack/Qty.
		3292U-A00003	1

Universal thermostat with rotary temperature setting

Control unit (must be used with switching unit).
Selectable room or fl oor function of the thermostat.
Linear temperature setting. Indication of output status by two-colour LED. Push buttons for regulation ON/OFF and for manual temperature reduction (with LED indication).
Operating temperature: 0 °C to +55 °C
Room thermostat with thermal feedback:
Temperature range: approx. +13 °C to +27 °C
Adjustable manual temperature reduction: approx. 2 K to 8 K
Hysteresis: approx. ±0.25 K
Floor thermostat:
Temperature setting range: approx. +15 °C to +48 °C
Manual temperature reduction: approx. 4 K to 16 K
Hysteresis: approx. ±0.5 K
The external temperature sensor 3292U-A90100 (not included) must be connected to terminals 1 and 2 of the switching unit.

Colour	Type	Order code	Pack/Qty.
white		3292G-A10101 B1	1

Floor heating temperature sensor

For thermostat with rotary temperature setting 3292.-A10101, for programmable thermostat 3292.-A10301.
Sensor element: PTC thermistor, 2 kΩ at 25 °C
Cable: PVC, 4 m length
Conductors: 2× 0.35 mm²
Cable head: metal, Ø 6 × 18 mm
Degree of protection: IP 54

Colour	Type	Order code	Pack/Qty.
grey		3292U-A90100	1

Swing®L
LED light

Accessories

Indication and orientation LED illumination insert

Installation depth: 25 mm
Screw-type terminals.
Fixation via screws only.
10 mA, 230 V AC

Colour	Type	Order code	Pack/Qty.
white light		3917U-A00050	1
blue light		3917U-A00051	1
green light		3917U-A00052	1
red light		3917U-A00053	1

Indication and orientation LED illumination insert with infrapasive senzor

Installation depth: 25 mm
Screw-type terminals.
Fixation via screws only.
Switch-off delay: 1min
Threshold lighting : 10lx
12 mA, 230 V AC

Colour	Type	Order code	Pack/Qty.
white light	**3299U-A52500**	2CHU705250A4000	1

Cover plate for straight LED illumination or for Profi l 45 adapter

For LED illumination insert.
For Profi l 45 insert adapter.

Colour	Type	Order code	Pack/Qty.
white		5016G-A00070 B1	5/1

Cover plate for thermostat

For insert: 2CHG704010A4520.

Colour	Type	Order code	Pack/Qty.
white		2CHG704010A4520	1

Combination thermostat

Thermostat with low insert (20 mm mounting depth) meeting the Ecodesign requirements. The thermostat is pre-programmed. Rated voltage 230 V AC ± 10% 50 Hz
Output 1 no and connectors 1.5 mm² to 4 mm²
Switching current 250 V AC / 16 (2) A, protection class II and protection class IP21. Operating temperature 0 ° C to 35 ° C and storage temperature -20 ° C to 70 ° C
Clock Accuracy (at 20 ° C) <+/- 0.5 sec / min
Power consumption (standby) <0.05 W
Floor sensor NTC 10kΩ @ 25˚C and external control (EXT connector) 230V AC / 10µA (same phase).

Colour	Type	Order code	Pack/Qty.
		2TKA00004033	1

Compensator

1. Prevents the self-ignition/fl ickering of energy-saving lamps (CFL, LED) in OFF state when orientation illumination is used. This effect is caused by features of built-in ballasts, occures if the illumination is connected between phase and the lamp. The compensator is applicable in the circuits with switches 1g1w, 1g2w, intermediate. (To be connected in parallel to the lamp).
2. Prevents after-glow of extra-low-voltage halogen or LED lamps in the deactivated state due to possible ripple voltage or activation via touch-dimmer without neutral conductor connection. (To be connected in parallel to the primary transformer side or to the lamp).
3. Removes noise generation on electronic transformers in the switched-off state during activation via touch dimmer without neutral conductor connection. (To be connected in parallel to the primary transformer side).
4. Removes ripple voltages on the control line in blind control/group controls with Busch-Jalousiecontrol® II devices. (To be connected between control wire “UP” and N conductor, and between “Down” and N conductor).

Dimensions: Ø 22 × 25 mm. Length of wires: approx. 235 mm 250 V AC, 50 Hz

Colour	Type	Order code	Pack/Qty.
	6596	6599-0-2290	1

Orientation universal neon lamp

For rocker switches and push-switches of 3557, 3558, 3559 series.
– orange light (neon lamp collar is blue)
– green light (neon lamp collar is grey)
– blue light (neon lamp collar is purple)

Colour	Type	Order code	Pack/Qty.
orange light		3916-12221	100/10
green light		3916-12222	100/10
blue light		3916-12223	100/10

Indication neon lamp

For rocker switches and push-switches of 3557, 3558, 3559 series.
– orange light (neon lamp collar is green)

Colour	Type	Order code	Pack/Qty.
		3916-22221	100/10

Universal lamp

For orientation and indication illumination in doorbell circuits with extra-low voltage (for mechanisms 3557-A80440, 3559-A91445, 3559-A86445).
40 mA, 12 V AC (Article number: **8345-1**)
22 mA, 24 V AC (Article number: **8337-1**)

Colour	Type	Order code	Pack/Qty.
	8345-1	1784-0-0289	100/1
	8337-1	1784-0-0032	100/1

Swing®L
Accessories

Neon lamp, spare

For dimmer cover plates with rotary control.
0.8 mA, 230 V AC

Colour	Type	Order code	Pack/Qty.
	3855	6599-0-0518	10/1

Fuse for electronic inserts (spare), slow cut-off characteristics

T1.6A/1500 (for 6514-0-0111)

Colour	Type	Order code	Pack/Qty.
		GT520216	10

Fuse for electronic inserts (spare), slow cut-off characteristics

T3.15A/1500 (for 6515-0-0704, 6512-0-0057, 6517-0-0018, 6560-0-1205, 3294U-A00130)

Colour	Type	Order code	Pack/Qty.
		GT520231	10

Fuse for electronic inserts (spare), slow cut-off characteristics

T6.3A/1500 (for 6520-0-0227)

Colour	Type	Order code	Pack/Qty.
		GT520263	10

Fuse for electronic inserts (spare), fast cut-off characteristics

F2.5A/1500 (for 3299.-A121..)

Colour	Type	Order code	Pack/Qty.
		GF520225	10

Fuse for electronic inserts (spare), fast cut-off characteristics

F3.15A/1500 (for 3299.-A321..)

Colour	Type	Order code	Pack/Qty.
		GF520231	10

Cable outlet

With strain relief.
As adapter from fi xed installation to fl exible
3× 1.5 mm² - 5× 2.5 mm² cable.
Terminal block is not included.

Colour	Type	Order code	Pack/Qty.
white		3938G-A00034 B1	5/1

Blank plate

With plastic mounting plate.

Colour	Type	Order code	Pack/Qty.
white		3902G-A00001 B1	10

Surface mounting box

For trunking distribution systems.
For flush-mounted switches and semiflush-mounted double socket outlets 5512J-C02259.
Internal depth: 26 mm
External dimensions: 85 × 85 × 28 mm
Screws for fi xation of inserts included.

Colour	Type	Order code	Pack/Qty.
white		3900J-C00001 B	10

Surface mounting box

For trunking distribution systems.
For double socket outlets 5513J-C02357 ..
Internal depth: 26 mm
External dimensions: 85 × 109 × 28 mm
Screws for fi xation of inserts included.

Colour	Type	Order code	Pack/Qty.
white		3900J-C00002 B	10

Swing®L
Cover frames

Cover frame 1-gang

Colour	Type	Order code	Pack/Qty.
mocca	**3901J-A00010 C3**	2CHJ010010A4029	20
creamy	**3901J-A00010 C1**	2CHJ010010A4511	20
brick colour	**3901J-A00010 R3**	2CHJ010010A4513	20
white	**3901J-A00010 B1**	2CHJ010010A4520	20
light grey	**3901J-A00010 S1**	2CHJ010010A4527	20

Cover frame 2-gang

For horizontal and vertical installation.

Colour	Type	Order code	Pack/Qty.
mocca	**3901J-A00020 C3**	2CHJ010020A4029	10
creamy	**3901J-A00020 C1**	2CHJ010020A4511	10
brick colour	**3901J-A00020 R3**	2CHJ010020A4513	10
white	**3901J-A00020 B1**	2CHJ010020A4520	10
light grey	**3901J-A00020 S1**	2CHJ010020A4527	10

Cover frame 3-gang

For horizontal and vertical installation.

Colour	Type	Order code	Pack/Qty.
mocca	**3901J-A00030 C3**	2CHJ010030A4029	10
creamy	**3901J-A00030 C1**	2CHJ010030A4511	10/1
brick colour	**3901J-A00030 R3**	2CHJ010030A4513	10/1
white	**3901J-A00030 B1**	2CHJ010030A4520	10/1
light grey	**3901J-A00030 S1**	2CHJ010030A4527	10/1

Cover frame 4-gang

For horizontal and vertical installation.

Colour	Type	Order code	Pack/Qty.
mocca	**3901J-A00040 C3**	2CHJ010040A4029	10
creamy	**3901J-A00040 C1**	2CHJ010040A4511	10/1
brick colour	**3901J-A00040 R3**	2CHJ010040A4513	10/1
white	**3901J-A00040 B1**	2CHJ010040A4520	10/1
light grey	**3901J-A00040 S1**	2CHJ010040A4527	10/1

Cover frame 5-gang

For horizontal and vertical installation.

Colour	Type	Order code	Pack/Qty.
mocca	**3901J-A00050 C3**	2CHJ010050A4029	10/1
creamy	**3901J-A00050 C1**	2CHJ010050A4511	10/1
brick colour	**3901J-A00050 R3**	2CHJ010050A4513	10/1
white	**3901J-A00050 B1**	2CHJ010050A4520	10/1
light grey	**3901J-A00050 S1**	2CHJ010050A4527	10/1

Swing®L

Flush mounted switches and socket outlets IP44

Rocker switch mechanism, 1-gang 1-way, with rocker

Screw-type terminals.
Fixation via screws or claws.
IP 44
10 AX, 250 V AC

Colour	Type	Order code	Pack/Qty.
white		3557G-A01940 B1	10/1

Rocker switch mechanism, 1-gang 2-way, with rocker

Screw-type terminals.
Fixation via screws or claws.
IP 44
10 AX, 250 V AC

Colour	Type	Order code	Pack/Qty.
white		3557G-A06940 B1	10/1

Rocker switch mechanism, intermediate, with rocker

Screw-type terminals.
Fixation via screws or claws.
IP 44
10 AX, 250 V AC

Colour	Type	Order code	Pack/Qty.
white		3557G-A07940 B1	10/1

Rocker push-switch mechanism, 1-gang 1-way, with rocker

Screw-type terminals.
Fixation via screws or claws.
IP 44
10 A, 250 V AC

Colour	Type	Order code	Pack/Qty.
white		3557G-A80940 B1	10/1

Socket outlet with earthing pin, with hinged lid [26) 38)]

Screw-type terminals.
Fixation via screws or claws.
IP 44
16 A, 250 V AC

Colour	Type	Order code	Pack/Qty.
white with white hinged lid)		5518G-A02989 B	10
white (with translucent hinged lid)		5518G-A02989 B1	10

[26)] The insert meets the specified degree of protection when mounted on a vertical, smooth and non-porous wall.
[38)] The indicated degree of protection is provided only when the lid is closed.

Notes

Zenit
Limitless subtlety

For its inexhaustible finishes, its infinite features and the simplicity of its installation. Zenit stands out and represents the highest level in functionality and design. Zenit reaches the pinnacle of design, diversity, versatility, performance and, of course, comfort by presenting all the facilities in its installation. Present in different spaces; home, offices, places of leisure, etc., Zenit represents the most intelligent option to provide an extra in comfort and decoration. Furthermore, value and functionality can also be sustainable. Zenit has been the first series certified with Ecodesign for a reason.

Renew your spaces.
Integration and perfection
in all its aspects.

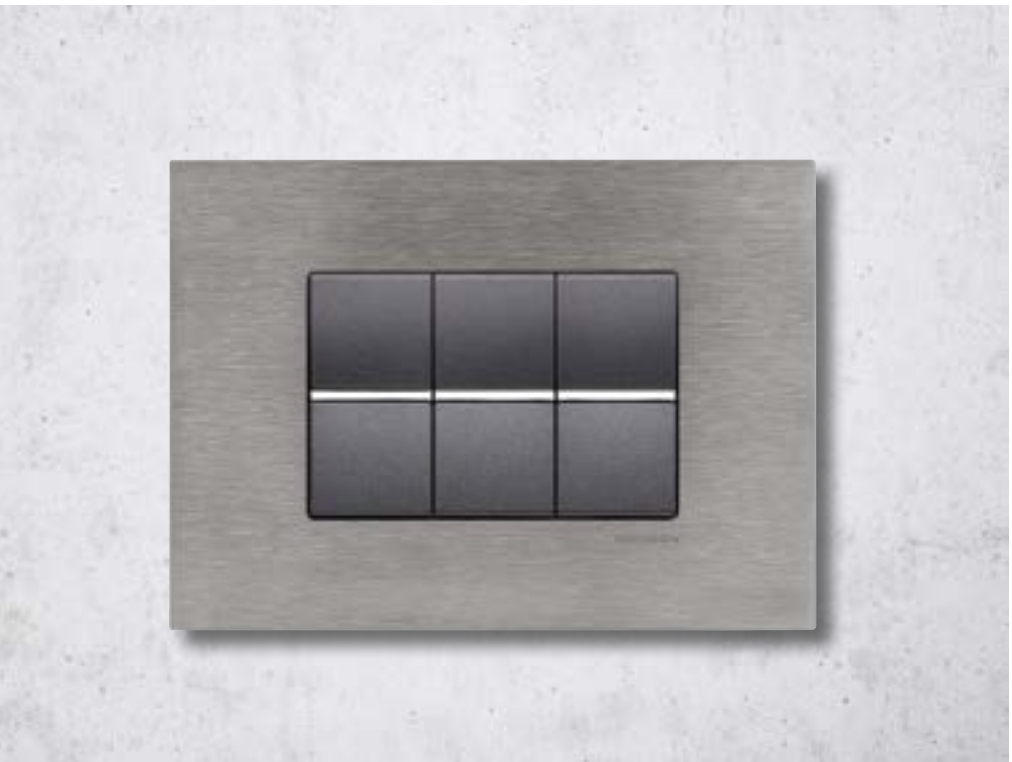

Zenit S **Zenit R**

ZENIT S

Introducing Zenit S: Elevate Your Spaces with Elegance and Sustainability.

Welcome to the world of Zenit S, where sophistication meets innovation.
Our latest range redefines modern living, offering slimline designs that set new standards of elegance. With the slimmest, Zenit S seamlessly integrates into any interior, adding a touch of refinement to every space. Choose from a diverse palette of finishes, including Matt Black, Total Anthracite, and Stainless Steel, to suit your unique style.
With over one hundred and fifty available functions and new materials, Zenit S offers endless possibilities for customization. Plus, our commitment to sustainability means you can enjoy eco-friendly solutions without compromising on quality or performance.
Experience Zenit S and transform your spaces today.

Zenit
The essence of design

The most subtle frame on the market. Simple, elegant, with a first class design. Zenit S frame was born to further elevate the elegance of the environments in which it is found. Only 3.9 mm separate its surface from the wall, presenting an aspect never seen before in design and decoration.

Updating modularity
The flexibility of the series is based on an enormous combination of functionalities, finishes, colors and configurations. An almost infinite system of mechanisms. With the incorporation of the Zenit S frames we expand the proposal even more, multiplying its solutions. Zenit updates modularity.

The modernity of a classic
The balanced design of Zenit series is a synthesis between the simplicity of its rectilinear shapes and the technical advances incorporated inside. Its details complement each piece, raising the personality of each room. Its search for simplicity and converted geometry have allowed us to create the Zenit S frames, a milestone that makes the Zenit series a classic at the forefront of design.

Combinable and versatile
The incorporation of the Zenit S frames renews the solutions for a greater number of spaces. In addition to the traditional finishes such as White, Anthracite, Silver and Champagne, there are four new metallic finishes aimed at combining with current trends in decoration: Anti-fingerprint Stainless Steel, Silk Black, Mocha and Matte Gold. Finishes that increase the aesthetic value of the series and the spaces in which they are mounted. Zenit completes its offer with three new painted finishes that take their colors from nature and their shapes. Dune, Taupe and Commodore come to join a complete range of solutions that now shines with an even more natural light.

Even slimmer, even more unforgettable

A new style, smart and sustainable features

Endless possibilities
Transform your spaces with a wide choice of finishes, more than one hundred and fifty available functions and new materials.

Sustainable since 2008
First modular series designed according to Eco-Design ISO 14006. Since then it has continued to reduce its impact year after year.

Simple installation
A series born from the suggestions of the professional users, which make it quick and easy to install.

Quality materials
Switches with capacity for 200W LED (16AX), aesthetic parts in polycarbonate and metal frames make the life of Zenit longer than usual in its segment.

Style details
Choose rockers with integrated white LED lighting, or with a matching decorative profile.

Flexible design
Add value to your projects with a subtle and elegant solution, suitable for any environment.

Square frame: 4,9 mm
Rectangular frame: 3,9 mm

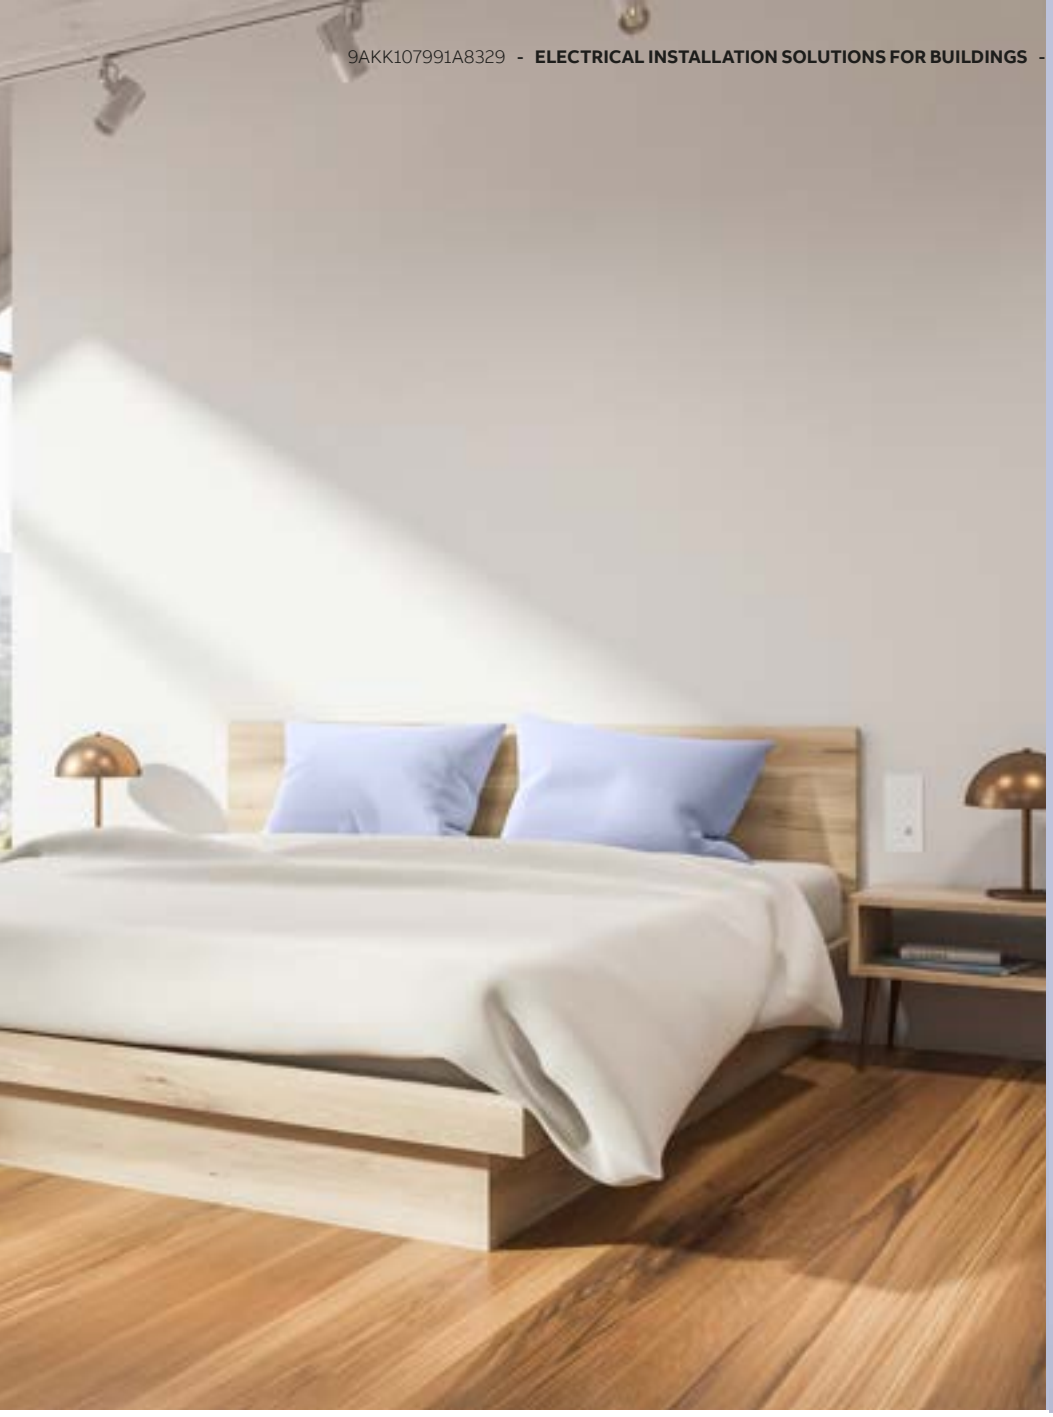

—

Zenit S

Slim fit frames for spaces that require subtle elements to highlight their decoration. Frames that are the essence of design, the soul of Zenit.

—

Zenit R

Regular fit frames for installations demanding extra wiring space or wall coverage, but without living aside a high decorative level.

A reliable and circular ecosystem

Ecodesign: sustainability is assured from design to end of life

ABB **Eco** Solutions™

Zenit is part of ABB Ecosolutions portfolio.
This label is an assurance that, where relevant, the product they are buying is:

- Designed to last and manufactured with the maximum amount of sustainably sourced raw materials;
- Made with processes that are designed to avoid waste and maximize the use of sustainable packaging materials;
- Designed to increase resource and process efficiency while in use, be upgradable and optimize the lifetime of equipment and facilities;
- Supported by take-back services leading to refurbishment, re-use or recycling of products and components, and is accompanied by instructions for responsible end-of-life treatment.
- Zenit users can now access the environmental product declaration or lifecycle assessment of all ABB products that carry the EcoSolutions label and may use them as external validation to confirm the product's environmental impact.

Read the QR code for more information

Zenit is designed in accordance with Eco-Design ISO 14006 standards in line with the sustainability values promoted by ABB, which are based on three pillars: reducing CO_2 emissions, preserving resources and promoting social progress.

Since its design, Zenit has been incorporating new elements in its desire to reduce the impact it generates:

- New packaging made from 100% recycled and recyclable materials with low water consumption.
- Packaging optimized to make the best possible use of space.
- Manufactured in an ABB's Niessen factory using 100 per cent renewable energy and partially own produced with its photovoltaic panels as part of Mission to Zero, ABB's commitment to sustainable future.
- Use of recycled plastic and recovery for reuse of all excess plastic in the injection.
- The use of halogenated flame retardants is avoided by using halogen-free raw materials.
- The paints are water-based, thus avoiding the use of environmentally harmful solvents.
- Use of switch indicator lights with LED technology for energy savings of 25%.



Modern living, eco-conscious elegance

New Dune and Matt Black finishings accompanied by the new Tacteo and metal frames

—

Refinement through Innovation

When perfection is attained, the journey to improvement begins. That's why Zenit introduces new finishes to its entire portfolio, enhancing its timeless style with two fresh painted options: Dune and Matt Black. These additions, alongside the existing five, expand design possibilities to perfectly suit any style.

Dune: endless beauty
Memories of sand, of clean land... is what Dune offers us. Dune embodies clarity and classic charm. Ideal for creating open, inviting spaces that exude timeless elegance.

Matt Black: Unparalleled Sophistication
A deep, rich black that adds a touch of refinement to any room. Symbolizing elegance, sophistication, and understated luxury, Matt Black elevates the ambiance and inspires creative expression.

Tacteo and metal frames
Two new finishes complemented by four new frames in two materials: metal and Tacteo effect. Along with the valuable Stainless Steel, we add the Nickel, a metal that epitomizes a blend of timeless beauty and functional elegance.
For the most sophisticated projects we offer the possibility of combining all Zenit solutions with ABB Tacteo solutions through two frame finishes such as Tacteo White and Tacteo Black.

New IP40 boxes

Compact and Cutting-Edge

Now, all Zenit functions can also be surface-mounted, ensuring both decorative appeal and safety.
Available in all Zenit finishes, its new surface boxes reduce the volume compared to other solutions by 50%.
Zenit brings design to surface installations, maintaining its ease of installation and adding IP40 protection for switches, pushbuttons and Schuko socket outlets with lid.
This solution is perfect not only for interior spaces with high decorative demands but also for demanding interior environments such as parking areas, warehouses, and more.

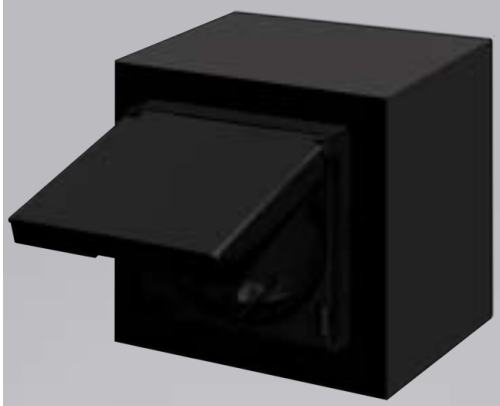

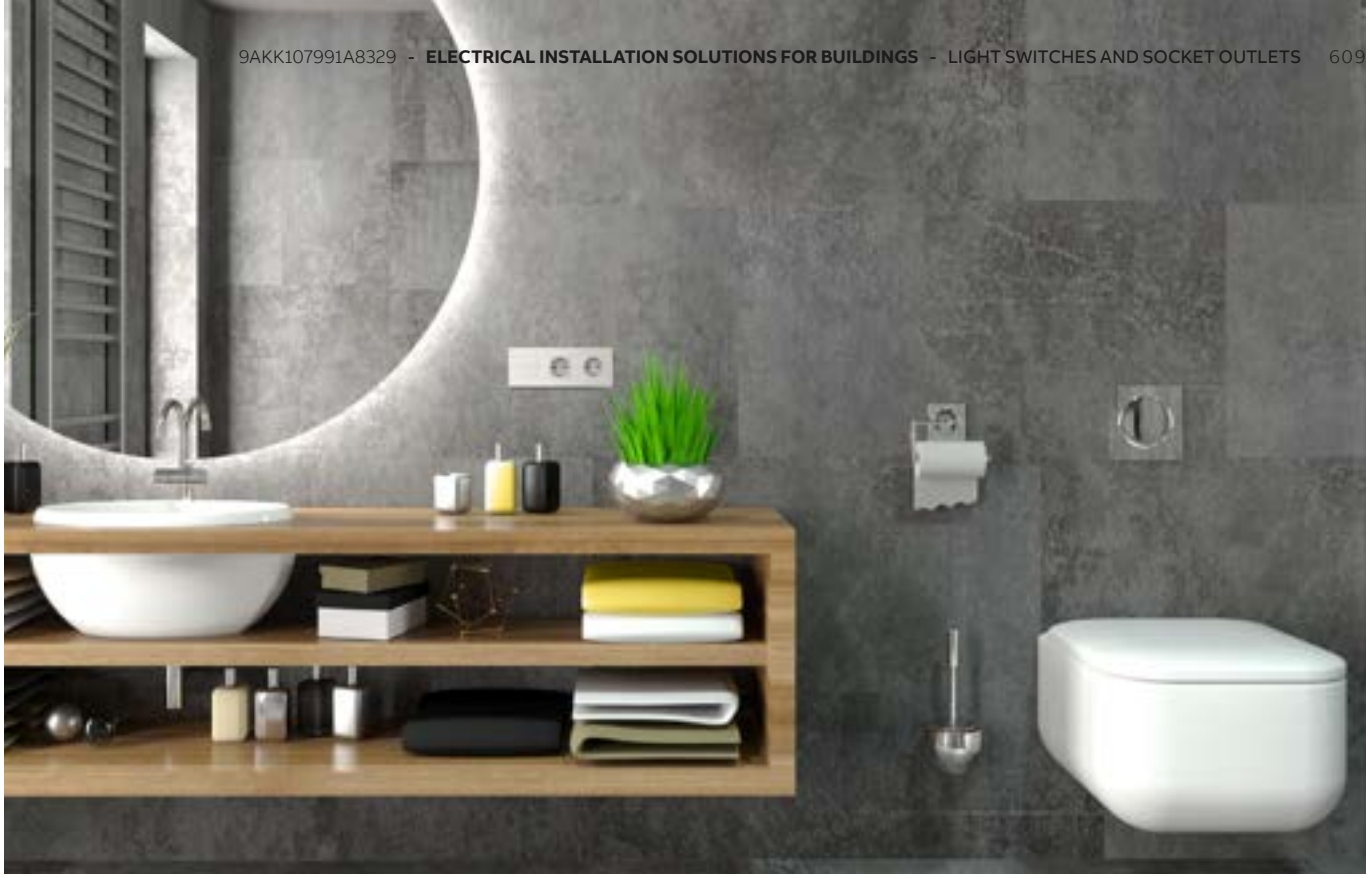

IP44 frames

Safer style

Why compromise on safety or style in wet spaces like kitchens or bathrooms? Zenit's new IP44 frames are the answer for rooms in which we need to have a high degree of protection but at the same time maintain aesthetic coherence with the decoration of the rest of the space.
Available in 1, 2 and 3-gang frames and in all Zenit finishes, in combination with standard switches, pushbuttons, Schuko socket outlets with covers and mounting plates (Zenit Regular), the decision to provide IP44 protection to the devices can be made at the last moment or even in the future, since it is enough to replace the regular frame with the new IP44 frame from Zenit to increase the protection of the installation against the water.

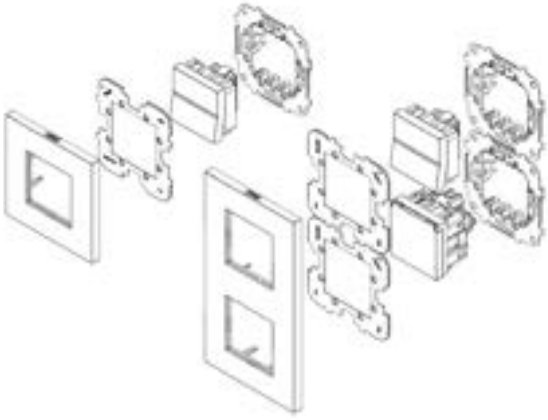

Improving an extraordinary design

New trims, symbols and white light

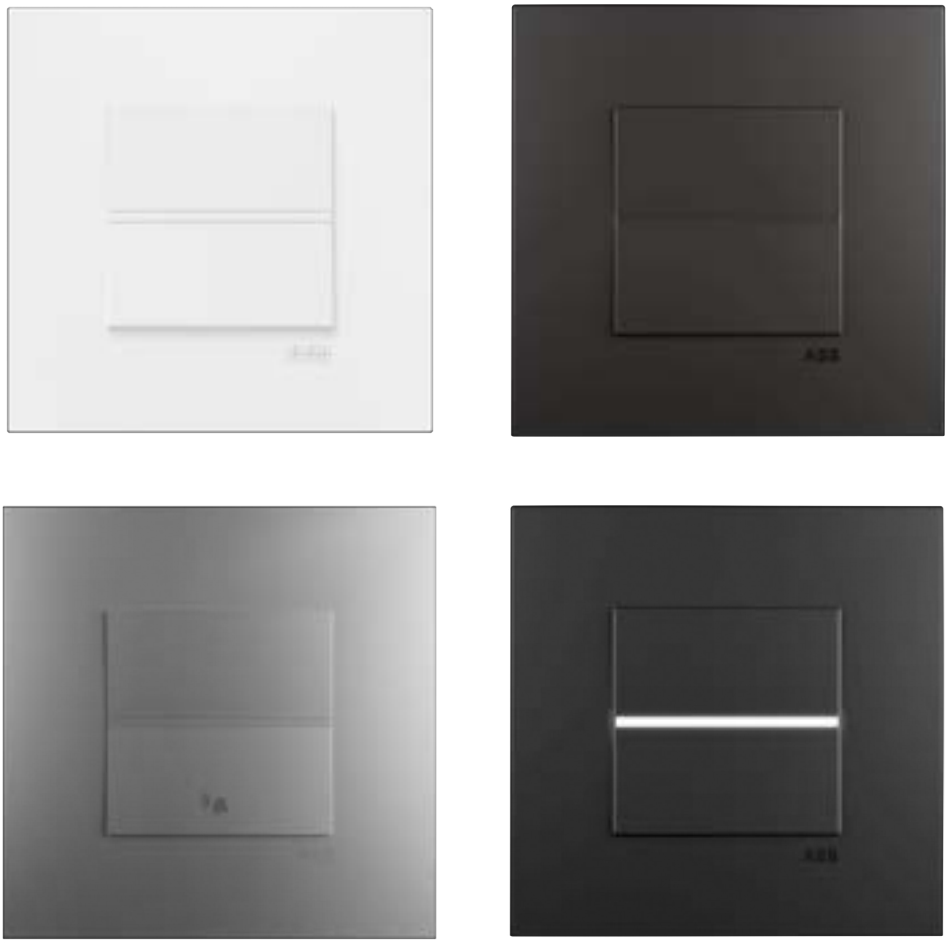

Zenit is a series that is constantly evolving and creating trends. Its new features are not only limited to the design, finishes, materials or functions, but also to small details such as the lighting of the locator and indicator lamps, the decorative trims and the symbols of the pushbuttons:

- New white LED lighting for the locator and indicator lamps.
- Switches and pushbuttons in White and Anthracite with decorative trims in the same color.
- Pushbuttons with new bell and light symbols engraved on the rocker.

One design

endless possibilities for any building

Residential building solutions

—
ABB-free@home

—
USB A+C chargers

—
Dimmers



—
IP44 frames

Hospitality solutions

—
DND/MUR systems

—
Card switches & DES

—
Multimedia center

—
Room master switch

Commercial building solutions

—
ABB i-bus KNX

—
IP40 box

—
Emergency light

—
VDI solutions

Zenit

Functions for all spaces. Zenit can be installed everywhere, in spaces that require new solutions, with new applications and all installation facilities.

Rapid cabling - Up to 40% savings

- Contacts with automatic connection terminals simplifying the cabling and saving up to a 40% in installation time. Large and smooth press clamps to make the automatic connection more comfortable and safer.
- 16AX switches for up to 200W (100W at 127Vac) LED loads, according to the latest IEC requirements.
- Robust and compact mechanisms. Insertion and extraction from the front.
- Designed to hold the switches firmly avoiding balancing problems.
- Only 21 mm depth, which allows more connection space for wires.
- Manufactured with high quality and recyclable material.

More protection

Children are really curious and get excited with any dangerous device available at home, especially those that are at the height of socket outlets. All Zenit socket outlets are equipped with shutters for child protection, protecting the live parts from electric shock.



1. Strip the cable about 14 mm and introduce it into the terminal.

2. Press the push button and insert the cable.

3. Release the push button and check fixation. To disconnect the cord, press again the push button on top and bottom.

More benefits

- Galvanized steel mounting plates with unique anticorrosion treatment with top and bottom nerves for a rigid positioning of the mechanism.
- Locator and indicator lights can be easily be mounted or changed from the front side without dismounting the switch.
- Low consumption LED lamps.
- Low consumption in stand-by and high efficiency USB chargers.
- Schuko socket outlets with the three screws in the same side to to facilitate their wiring.

Zenit

ABB-free@home - Home becomes smart

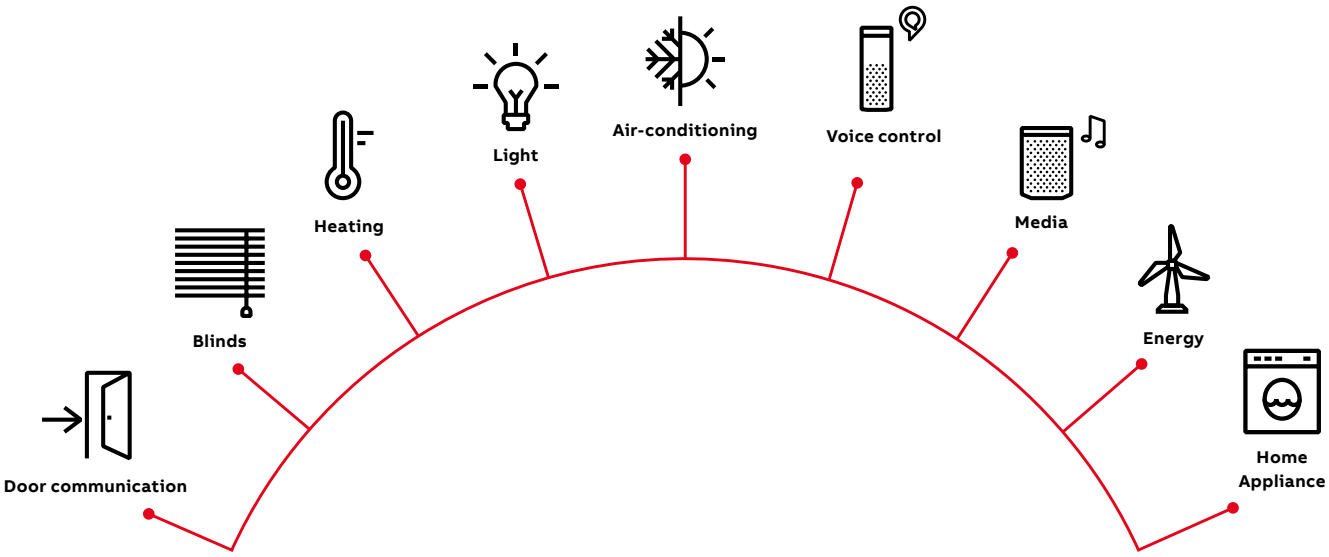

The pleasure of simplicity
ABB-free@home® makes daily life easier. You can manage blinds, lights, heating, air-conditioning and door communication using just one system. The smartphone becomes the remote control in the house. It allows you to raise the blinds and switch on the radio in the kitchen with the touch of a button while you are still in bed – or to deactivate all lights and devices via a switch when leaving the house. Very convenient. Extremely comfortable. Very energy efficient. The setting of these scenes is as easy as can be – to suit the mood or situation.

ABB i-bus KNX - Details and solutions for intelligent building control

Combinable concept with sensors and sensor/actuators
Creating a comprehensive range, is suitable for all needs. Optimizing comfort, safety and efficiency in homes and buildings. Providing comfort solutions to satisfy all types of needs and projects. Ensuring safety and protection of persons and goods. Saving energy by using only the amount of energy required.

Easy and intuitive installation system, providing maximum values in performance, comfort and functionality in any market

European installation

Switch composition in square box

Mounting plate **Insert / Cover plate** **Frame**

British standard installation

Switch composition

Mounting plate **Insert / Cover plate** **Frame**

Schuko socket outlet composition in square box

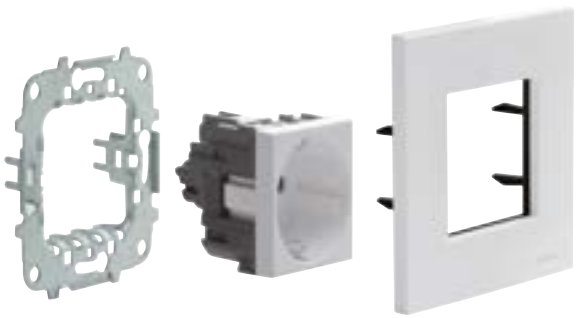

Mounting plate **Insert / Cover plate** **Frame**

Socket outlet composition

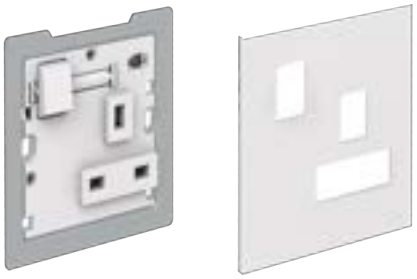

Insert **Faceplate**

Italian installation

4 module composition

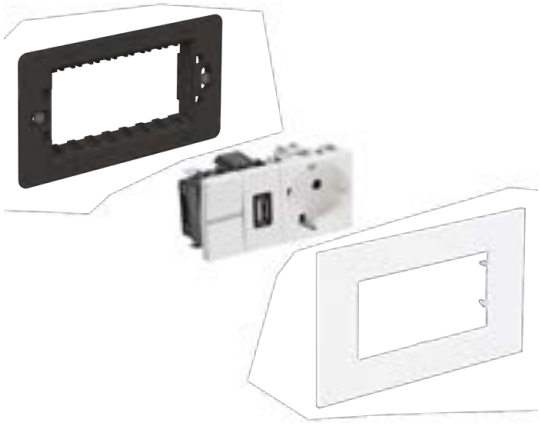

Mounting plate **Insert / Cover plate** **Frame**

7 module composition

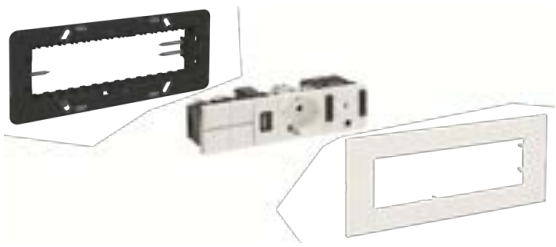

Mounting plate **Insert / Cover plate** **Frame**

American & Asian installation

Switch composition in rectangular box

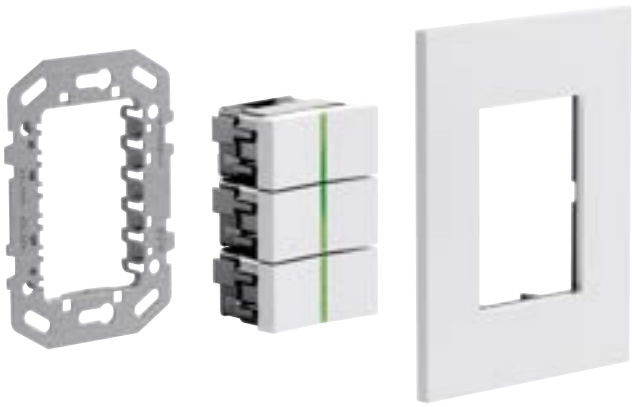

Mounting plate **Insert / Cover plate** **Frame**

NEMA socket outlet composition in rectangular box

Mounting plate **Insert / Cover plate** **Frame**

Unlimited possibilities
For those who want it all

Zenit, a subtly unique piece. A series that evolves with you, that responds to your demands and provides a unique solution for your spaces and needs. Because with the flexibility of its infinite combinations, Zenit guarantees an optimal proposal to cover any type of need in our spaces. Feel the peace of having it all.

Module finishes
Available in 7 colors

White
BL

Dune
DN

Matt Black
NT

Total White
BB

Anthracite
AN

Total Anthracite
AA

Silver
PL

Illuminated switches and push-buttons
Lamps available in white LED color

White
.51

4 systems available



European system



Italian system



American and Asian system



British Standard system

Classic frame finishes
Available in 5 colors

White
BL

Dune
DN

Matt Black
NT

Anthracite
AN

Silver
PL

Metallic frame finishes
Available in 4 colors

Stainless Steel
OX

Nickel
NI

Mocha
MO

Matt Gold
OM

Nature frame finishes
Available in 4 colors

Commodore
CM

Taupe
TP

Tacteo finishes
Available in 2 colors

Tacteo White
TB

Tacteo Black
TN

Zenit S frames

Available in 13 colors

BL - White

DN - Dune

PL - Silver

NT - Matt Black

AN - Anthracite

OX - Stainless Steel

Zenit R Solid frames

Available in 5 colors



BL - White



DN - Dune

PL - Silver

NT - Matt Black

AN - Anthracite

Zenit R Float frames

Available in 12 colors

END OF LIFE

BL - White

PL - Silver

CB – White Glass

AN - Anthracite



CN - Black Glass

PZ - Slate



OM - Matt Gold

NI - Nickel

MO - Mocha

CM - Commodore

BL - Taupe

TB - Tacteo White

TN - Tacteo Black

CP – Pearl Glass

CC - Coffee Glass

CH –Champagne Glass

CF - Graphite

WG - Wenge

OX - Stainless Steel

Zenit

Components and Functions

Zenit

1-way switches screwless

1-way switch, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screwless terminals.
Optional: locator LED lamp N2191 BB.

Colour	Type	Order code	Size	Qty.*
Total White	**N2101 BB**	2CLA210100N1201	1M	20
White	**N2101 BL**	2CLA210100N1101	1M	20
Dune	**N2101 DN**	2CLA210100N6201	1M	20
Silver	**N2101 PL**	2CLA210100N1301	1M	20
Total Anthracite	**N2101 AA**	2CLA210100N1601	1M	20
Anthracite	**N2101 AN**	2CLA210100N1801	1M	20
Matt Black	**N2101 NT**	2CLA210100N1501	1M	20
White	**N2801 BL**	2CLA280100N1101	1,5M	10
Dune	**N2801 DN**	2CLA280100N6201	1,5M	10
Silver	**N2801 PL**	2CLA280100N1301	1,5M	10
Anthracite	**N2801 AN**	2CLA280100N1801	1,5M	10
Matt Black	**N2801 NT**	2CLA280100N1501	1,5M	10
Total White	**N2201 BB**	2CLA220100N1201	2M	10
White	**N2201 BL**	2CLA220100N1101	2M	10
Dune	**N2201 DN**	2CLA220100N6201	2M	10
Silver	**N2201 PL**	2CLA220100N1301	2M	10
Total Anthracite	**N2201 AA**	2CLA220100N1601	2M	10
Anthracite	**N2201 AN**	2CLA220100N1801	2M	10
Matt Black	**N2201 NT**	2CLA220100N1501	2M	10
White	**N2301 BL**	2CLA230100N1101	3M	10
Dune	**N2301 DN**	2CLA230100N6201	3M	10
Silver	**N2301 PL**	2CLA230100N1301	3M	10
Anthracite	**N2301 AN**	2CLA230100N1801	3M	10
Matt Black	**N2301 NT**	2CLA230100N1501	3M	10

2-way switches screwless

2-way switch, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screwless terminals.
Optional: locator LED lamp N2192 BB.

Colour	Type	Order code	Size	Qty.*
Total White	**N2102 BB**	2CLA210200N1201	1M	20
White	**N2102 BL**	2CLA210200N1101	1M	20
Dune	**N2102 DN**	2CLA210200N6201	1M	20
Silver	**N2102 PL**	2CLA210200N1301	1M	20
Total Anthracite	**N2102 AA**	2CLA210200N1601	1M	20
Anthracite	**N2102 AN**	2CLA210200N1801	1M	20
Matt Black	**N2102 NT**	2CLA210200N1501	1M	20
White	**N2802 BL**	2CLA280200N1101	1,5M	10
Dune	**N2802 DN**	2CLA280200N6201	1,5M	10
Silver	**N2802 PL**	2CLA280200N1301	1,5M	10
Anthracite	**N2802 AN**	2CLA280200N1801	1,5M	10
Matt Black	**N2802 NT**	2CLA280200N1501	1,5M	10
Total White	**N2202 BB**	2CLA220200N1201	2M	10
White	**N2201 BL**	2CLA220200N1101	2M	10
Dune	**N2202 DN**	2CLA220200N6201	2M	10
Silver	**N2202 PL**	2CLA220200N1301	2M	10
Total Anthracite	**N2202 AA**	2CLA220200N1601	2M	10
Anthracite	**N2202 AN**	2CLA220200N1801	2M	10
Matt Black	**N2202 NT**	2CLA220200N1501	2M	10
White	**N2302 BL**	2CLA230200N1101	3M	10
Dune	**N2302 DN**	2CLA230200N6201	3M	10
Silver	**N2302 PL**	2CLA230200N1301	3M	10
Anthracite	**N2302 AN**	2CLA230200N1801	3M	10
Matt Black	**N2302 NT**	2CLA230200N1501	3M	10

Zenit

Intermediate switches screwless

Intermediate switch, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screwless terminals.
Optional: locator LED lamp N2192 BB .

Colour	Type	Order code	Size	Qty.*
Total White	**N2110 BB**	2CLA211000N1201	1M	20
White	**N2110 BL**	2CLA211000N1101	1M	20
Dune	**N2110 DN**	2CLA211000N6201	1M	20
Silver	**N2110 PL**	2CLA211000N1301	1M	20
Total Anthracite	**N2110 AA**	2CLA211000N1601	1M	20
Anthracite	**N2110 AN**	2CLA211000N1801	1M	20
Matt Black	**N2110 NT**	2CLA211000N1501	1M	20
White	**N2810 BL**	2CLA281000N1101	1,5M	10
Dune	**N2810 DN**	2CLA281000N6201	1,5M	10
Silver	**N2810 PL**	2CLA281000N1301	1,5M	10
Anthracite	**N2810 AN**	2CLA281000N1801	1,5M	10
Matt Black	**N2810 NT**	2CLA281000N1501	1,5M	10
Total White	**N2210 BB**	2CLA221000N1201	2M	10
White	**N2210 BL**	2CLA221000N1101	2M	10
Dune	**N2210 DN**	2CLA221000N6201	2M	10
Silver	**N2210 PL**	2CLA221000N1301	2M	10
Total Anthracite	**N2210 AA**	2CLA221000N1601	2M	10
Anthracite	**N2210 AN**	2CLA221000N1801	2M	10
Matt Black	**N2210 NT**	2CLA221000N1501	2M	10
White	**N2310 BL**	2CLA231000N1101	3M	10
Dune	**N2310 DN**	2CLA231000N6201	3M	10
Silver	**N2310 PL**	2CLA231000N1301	3M	10
Anthracite	**N2310 AN**	2CLA231000N1801	3M	10
Matt Black	**N2310 NT**	2CLA231000N1501	3M	10

Double pole switches screwless

1-way switch, double pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screwless terminals.
Optional: locator LED lamp N2192 BB.

Colour	Type	Order code	Size	Qty.*
Total White	**N2101.2 BB**	2CLA210120N1201	1M	20
White	**N2101.2 BL**	2CLA210120N1101	1M	20
Dune	**N2101.2 DN**	2CLA210120N6201	1M	20
Silver	**N2101.2 PL**	2CLA210120N1301	1M	20
Total Anthracite	**N2101.2 AA**	2CLA210120N1601	1M	20
Anthracite	**N2101.2 AN**	2CLA210120N1801	1M	20
Matt Black	**N2101.2 NT**	2CLA210120N1501	1M	20
Total White	**N2201.2 BB**	2CLA220120N1201	2M	10
White	**N2201.2 BL**	2CLA220120N1101	2M	10
Dune	**N2201.2 DN**	2CLA220120N6201	2M	10
Silver	**N2201.2 PL**	2CLA220120N1301	2M	10
Total Anthracite	**N2201.2 AA**	2CLA220120N1601	2M	10
Anthracite	**N2201.2 AN**	2CLA220120N1801	2M	10
Matt Black	**N2201.2 NT**	2CLA220120N1501	2M	10

Zenit

Push buttons screwless

Push-button, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16A.
Screwless terminals.
1-gang, 1-way - Normally Opened (NO) contact.
Optional: locator LED lamp N2191 BB.

With bell symbol

Colour	Type	Order code	Size	Qty.*
Total White	**N2104 BB**	2CLA210401N1201	1M	20
White	**N2104 BL**	2CLA210401N1101	1M	20
Dune	**N2104 DN**	2CLA210401N6201	1M	20
Silver	**N2104 PL**	2CLA210401N1301	1M	20
Total Anthracite	**N2104 AA**	2CLA210401N1601	1M	20
Anthracite	**N2104 AN**	2CLA210401N1801	1M	20
Matt Black	**N2104 NT**	2CLA210401N1501	1M	20
Total White	**N2204 BB**	2CLA220401N1201	2M	10
White	**N2204 BL**	2CLA220401N1101	2M	10
Dune	**N2204 DN**	2CLA220401N6201	2M	10
Silver	**N2204 PL**	2CLA220401N1301	2M	10
Total Anthracite	**N2204 AA**	2CLA220401N1601	2M	10
Anthracite	**N2204 AN**	2CLA220401N1801	2M	10
Matt Black	**N2204 NT**	2CLA220401N1501	2M	10
White	**N2304 BL**	2CLA230401N1101	3M	10
Dune	**N2304 DN**	2CLA230401N6201	3M	10
Silver	**N2304 PL**	2CLA230401N1301	3M	10
Anthracite	**N2304 AN**	2CLA230401N1801	3M	10
Matt Black	**N2304 NT**	2CLA230401N1501	3M	10

With light symbol

Colour	Type	Order code	Size	Qty.*
Total White	**N2104.2 BB**	2CLA210421N1201	1M	20
White	**N2104.2 BL**	2CLA210421N1101	1M	20
Dune	**N2104.2 DN**	2CLA210421N6201	1M	20
Silver	**N2104.2 PL**	2CLA210421N1301	1M	20
Total Anthracite	**N2104.2 AA**	2CLA210421N1601	1M	20
Anthracite	**N2104.2 AN**	2CLA210421N1801	1M	20
Matt Black	**N2104.2 NT**	2CLA210421N1501	1M	20
Total White	**N2204.2 BB**	2CLA220421N1201	2M	10
White	**N2204.2 BL**	2CLA220421N1101	2M	10
Dune	**N2204.2 DN**	2CLA220421N6201	2M	10
Silver	**N2204.2 PL**	2CLA220421N1301	2M	10
Total Anthracite	**N2204.2 AA**	2CLA220421N1601	2M	10
Anthracite	**N2204.2 AN**	2CLA220421N1801	2M	10
Matt Black	**N2204.2 NT**	2CLA220421N1501	2M	10

Without symbol

Colour	Type	Order code	Size	Qty.*
Total White	**N2104.7 BB**	2CLA210470N1201	1M	20
White	**N2104.7 BL**	2CLA210470N1101	1M	20
Dune	**N2104.7 DN**	2CLA210470N6201	1M	20
Silver	**N2104.7 PL**	2CLA210470N1301	1M	20
Total Anthracite	**N2104.7 AA**	2CLA210470N1601	1M	20
Anthracite	**N2104.7 AN**	2CLA210470N1801	1M	20
Matt Black	**N2104.7 NT**	2CLA210470N1501	1M	20
Total White	**N2204.7 BB**	2CLA220470N1201	2M	10
White	**N2204.7 BL**	2CLA220470N1101	2M	10
Dune	**N2204.7 DN**	2CLA220470N6201	2M	10
Silver	**N2204.7 PL**	2CLA220470N1301	2M	10
Total Anthracite	**N2204.7 AA**	2CLA220470N1601	2M	10
Anthracite	**N2204.7 AN**	2CLA220470N1801	2M	10
Matt Black	**N2204.7 NT**	2CLA220470N1501	2M	10

Zenit

Push buttons screwless

Push-button without symbol, NC, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16A.
Screwless terminals.
Normally Closed (NC) contact.
Locator lamp option not available.

Colour	Type	Order code	Size	Qty.*
Total White	**N2104.6 BB**	2CLA210460N1201	1M	5
White	**N2104.6 BL**	2CLA210460N1101	1M	5
Dune	**N2104.6 DN**	2CLA210460N6201	1M	5
Silver	**N2104.6 PL**	2CLA210460N1301	1M	5
Total Anthracite	**N2104.6 AA**	2CLA210460N1601	1M	5
Anthracite	**N2104.6 AN**	2CLA210460N1801	1M	5
Matt Black	**N2104.6 NT**	2CLA210460N1501	1M	5
Total White	**N2204.6 BB**	2CLA220460N1201	2M	5
White	**N2204.6 BL**	2CLA220460N1101	2M	5
Dune	**N2204.6 DN**	2CLA220460N6201	2M	5
Silver	**N2204.6 PL**	2CLA220460N1301	2M	5
Total Anthracite	**N2204.6 AA**	2CLA220460N1601	2M	5
Anthracite	**N2204.6 AN**	2CLA220460N1801	2M	5
Matt Black	**N2204.6 NT**	2CLA220460N1501	2M	5

Push-button with label holder, single pole



Rated voltage: 110 - 250 Vac.
Rated current: 16A.
Screwless terminals.
Normally Opened (NO) contact.
Optional: locator LED lamp N2191 BB.

Colour	Type	Order code	Size	Qty.*
White	**N2204.8 BL**	2CLA220480N1101	2M	10
Dune	**N2204.8 DN**	2CLA220480N6201	2M	10
Silver	**N2204.8 PL**	2CLA220480N1301	2M	10
Anthracite	**N2204.8 AN**	2CLA220480N1801	2M	10
Matt Black	**N2204.8 NT**	2CLA220480N1501	2M	10

Pullcord switches

Pullcord switch, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16A.
Screwless terminals.
Cord length: 2 meters.

Colour	Type	Order code	Size	Qty.*
Total White	**N2148 BB**	2CLA214800N1201	1M	5
White	**N2148 BL**	2CLA214800N1101	1M	5
Dune	**N2148 DN**	2CLA214800N6201	1M	5
Silver	**N2148 PL**	2CLA214800N1301	1M	5
Total Anthracite	**N2148AA**	2CLA214800N1601	1M	5
Anthracite	**N2148AN**	2CLA214800N1801	1M	5
Matt Black	**N2148 NT**	2CLA214800N1501	1M	5
Total White	**N2248 BB**	2CLA224800N1201	2M	5
White	**N2248 BL**	2CLA224800N1101	2M	5
Dune	**N2248 DN**	2CLA224800N6201	2M	5
Silver	**N2248 PL**	2CLA224800N1301	2M	5
Total Anthracite	**N2248 AA**	2CLA224800N1601	2M	5
Anthracite	**N2248 AN**	2CLA224800N1801	2M	5
Matt Black	**N2248 NT**	2CLA224800N1501	2M	5

Zenit

Illuminated switches and push-buttons screwless

1-way illuminated switch, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screwless terminals.
3 wires (Neutral conductor required).
Included: white LED lamp N2192 BB (230 Vac).

Colour	Type	Order code	Size	Qty.*
White	**N2101.51 BL**	2CLA210151N1101	1M	5
Dune	**N2101.51 DN**	2CLA210151N6201	1M	5
Silver	**N2101.51 PL**	2CLA210151N1301	1M	5
Anthracite	**N2101.51 AN**	2CLA210151N1801	1M	5
Matt Black	**N2101.51 NT**	2CLA210151N1501	1M	5
White	**N2201.51 BL**	2CLA220151N1101	2M	5
Dune	**N2201.51 DN**	2CLA220151N6201	2M	5
Silver	**N2201.51 PL**	2CLA220151N1301	2M	5
Anthracite	**N2201.51 AN**	2CLA220151N1801	2M	5
Matt Black	**N2201.51 NT**	2CLA220151N1501	2M	5

2-way illuminated switch, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screwless terminals.
4 wires (Neutral conductor required).
Included: white LED lamp N2191 BB (230 Vac).

Colour	Type	Order code	Size	Qty.*
White	**N2102.51 BL**	2CLA210251N1101	1M	5
Dune	**N2102.51 DN**	2CLA210251N6201	1M	5
Silver	**N2102.51 PL**	2CLA210251N1301	1M	5
Anthracite	**N2102.51 AN**	2CLA210251N1801	1M	5
Matt Black	**N2102.51 NT**	2CLA210251N1501	1M	5
White	**N2202.51 BL**	2CLA220251N1101	2M	5
Dune	**N2202.51 DN**	2CLA220251N6201	2M	5
Silver	**N2202.51 PL**	2CLA220251N1301	2M	5
Anthracite	**N2202.51 AN**	2CLA220251N1801	2M	5
Matt Black	**N2202.51 NT**	2CLA220251N1501	2M	5

Illuminated push-button without symbol, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16A.
Screwless terminals.
3 wires (Neutral conductor required).
Included: indicator LED lamp N2192 BB (230 Vac).

Colour	Type	Order code	Size	Qty.*
White	**N2104.51 BL**	2CLA210451N1101	1M	5
Dune	**N2104.51 DN**	2CLA210451N6201	1M	5
Silver	**N2104.51 PL**	2CLA210451N1301	1M	5
Anthracite	**N2104.51 AN**	2CLA210451N1801	1M	5
Matt Black	**N2104.51 NT**	2CLA210451N1501	1M	5
White	**N2204.51 BL**	2CLA220451N1101	2M	5
Dune	**N2204.51 DN**	2CLA220451N6201	2M	5
Silver	**N2204.51 PL**	2CLA220451N1301	2M	5
Anthracite	**N2204.51 AN**	2CLA220451N1801	2M	5
Matt Black	**N2204.51 NT**	2CLA220451N1501	2M	5

Zenit

Switches and push-buttons with screw-type terminals

1-way switch, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screw-nut type terminals.
Optional: lamp N2194 BB, N2194.1 BB or N2194.2 BB.

Colour	Type	Order code	Size	Qty.*
Total White	**N2101.T BB**	2CLA210109N1201	1M	20
White	**N2101.T BL**	2CLA210109N1101	1M	20
Dune	**N2101.T DN**	2CLA210109N6201	1M	20
Silver	**N2101.T PL**	2CLA210109N1301	1M	20
Total Anthracite	**N2101.T AA**	2CLA210109N1601	1M	20
Anthracite	**N2101.T AN**	2CLA210109N1801	1M	20
Matt Black	**N2101.T NT**	2CLA210109N1501	1M	20

1-way switch, double pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screw-nut type terminals.
Optional: lamp N2194 BB, N2194.1 BB or N2194.2 BB.

Colour	Type	Order code	Size	Qty.*
Total White	**N2101.2T BB**	2CLA210129N1201	1M	20
White	**N2101.2T BL**	2CLA210129N1101	1M	20
Dune	**N2101.2T DN**	2CLA210129N6201	1M	20
Silver	**N2101.2T PL**	2CLA210129N1301	1M	20
Total Anthracite	**N2101.2T AA**	2CLA210129N1601	1M	20
Anthracite	**N2101.2T AN**	2CLA210129N1801	1M	20
Matt Black	**N2101.2T NT**	2CLA210129N1501	1M	20

2-way switch, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screw-nut type terminals.
Optional: lamp N2194 BB, N2194.1 BB or N2194.2 BB.

Colour	Type	Order code	Size	Qty.*
Total White	**N2102.T BB**	2CLA210209N1201	1M	20
White	**N2102.T BL**	2CLA210209N1101	1M	20
Dune	**N2102.T DN**	2CLA210209N6201	1M	20
Silver	**N2102.T PL**	2CLA210209N1301	1M	20
Total Anthracite	**N2102.T AA**	2CLA210209N1601	1M	20
Anthracite	**N2102.T AN**	2CLA210209N1801	1M	20
Matt Black	**N2102.T NT**	2CLA210209N1501	1M	20

1-way switch 32A, double pole

Rated voltage: 110 - 250 Vac.
Rated current: 32A.
Plot type terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2201.8 BL**	2CLA220180N1102	2M	5
Dune	**N2201.8 DN**	2CLA220180N6202	2M	5
Silver	**N2201.8 PL**	2CLA220180N1302	2M	5
Anthracite	**N2201.8 AN**	2CLA220180N1802	2M	5
Matt Black	**N2201.8 NT**	2CLA220180N1502	2M	5

Intermediate switch, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screw-nut type terminals.
Optional: lamp N2194 BB, N2194.1 BB or N2194.2 BB.

Colour	Type	Order code	Size	Qty.*
Total White	**N2110.T BB**	2CLA211009N1201	1M	20
White	**N2110.T BL**	2CLA211009N1101	1M	20
Dune	**N2110.T DN**	2CLA211009N6201	1M	20
Silver	**N2110.T PL**	2CLA211009N1301	1M	20
Total Anthracite	**N2110.T AA**	2CLA211009N1601	1M	20
Anthracite	**N2110.T AN**	2CLA211009N1801	1M	20
Matt Black	**N2110.T NT**	2CLA211009N1501	1M	20

Push-button without symbol, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 16A.
Screw-nut type terminals.
1-gang, 1-way - Normally Opened (NO) contact.
Optional: lamp N2194 BB, N2194.1 BB or N2194.2 BB.

Colour	Type	Order code	Size	Qty.*
Total White	**N2104.7T BB**	2CLA210479N1201	1M	20
White	**N2104.7T BL**	2CLA210479N1101	1M	20
Dune	**N2104.7T DN**	2CLA210479N6201	1M	20
Silver	**N2104.7T PL**	2CLA210479N1301	1M	20
Total Anthracite	**N2104.7T AA**	2CLA210479N1601	1M	20
Anthracite	**N2104.7T AN**	2CLA210479N1801	1M	20
Matt Black	**N2104.7T NT**	2CLA210479N1501	1M	20

Zenit

Rocker covers with engraved symbols

Spare rocker cover for switches and push-buttons

Spare rocker cover without decorative trim.
1M rockers are suitable for N2101.X, N2102.X, N2110 and N2104.X inserts.
2M rockers are suitable for N2201.X, N2202.X, N2210 and N2204.X inserts.

Without symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109 BL**	2CLA210900N1101	1M	10
Dune	**N2109 DN**	2CLA210900N6201	1M	10
Silver	**N2109 PL**	2CLA210900N1301	1M	10
Anthracite	**N2109 AN**	2CLA210900N1801	1M	10
Matt Black	**N2109 NT**	2CLA210900N1501	1M	10
White	**N2209 BL**	2CLA220900N1101	2M	10
Dune	**N2209 DN**	2CLA220900N6201	2M	10
Silver	**N2209 PL**	2CLA220900N1301	2M	10
Anthracite	**N2209 AN**	2CLA220900N1801	2M	10
Matt Black	**N2209 NT**	2CLA220900N1501	2M	10

With nurse symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.01 BL**	2CLA210901N1101	1M	10
Dune	**N2109.01 DN**	2CLA210901N6201	1M	10
Silver	**N2109.01 PL**	2CLA210901N1301	1M	10
Anthracite	**N2109.01 AN**	2CLA210901N1801	1M	10
Matt Black	**N2109.01 NT**	2CLA210901N1501	1M	10
White	**N2209.01 BL**	2CLA220901N1101	2M	10
Dune	**N2209.01 DN**	2CLA220901N6201	2M	10
Silver	**N2209.01 PL**	2CLA220901N1301	2M	10
Anthracite	**N2209.01 AN**	2CLA220901N1801	2M	10
Matt Black	**N2209.01 NT**	2CLA220901N1501	2M	10

With lamp symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.02 BL**	2CLA210902N1101	1M	10
Dune	**N2109.02 DN**	2CLA210902N6201	1M	10
Silver	**N2109.02 PL**	2CLA210902N1301	1M	10
Anthracite	**N2109.02 AN**	2CLA210902N1801	1M	10
Matt Black	**N2109.02 NT**	2CLA210902N1501	1M	10
White	**N2209.02 BL**	2CLA220902N1101	2M	10
Dune	**N2209.02 DN**	2CLA220902N6201	2M	10
Silver	**N2209.02 PL**	2CLA220902N1301	2M	10
Anthracite	**N2209.02 AN**	2CLA220902N1801	2M	10
Matt Black	**N2209.02 NT**	2CLA220902N1501	2M	10

With dimmer symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.03 BL**	2CLA210903N1101	1M	10
Dune	**N2109.03 DN**	2CLA210903N6201	1M	10
Silver	**N2109.03 PL**	2CLA210903N1301	1M	10
Anthracite	**N2109.03 AN**	2CLA210903N1801	1M	10
Matt Black	**N2109.03 NT**	2CLA210903N1501	1M	10
White	**N2209.03 BL**	2CLA220903N1101	2M	10
Dune	**N2209.03 DN**	2CLA220903N6201	2M	10
Silver	**N2209.03 PL**	2CLA220903N1301	2M	10
Anthracite	**N2209.03 AN**	2CLA220903N1801	2M	10
Matt Black	**N2209.03 NT**	2CLA220903N1501	2M	10

With fan symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.04 BL**	2CLA210904N1101	1M	10
Dune	**N2109.04 DN**	2CLA210904N6201	1M	10
Silver	**N2109.04 PL**	2CLA210904N1301	1M	10
Anthracite	**N2109.04 AN**	2CLA210904N1801	1M	10
Matt Black	**N2109.04 NT**	2CLA210904N1501	1M	10
White	**N2209.04 BL**	2CLA220904N1101	2M	10
Dune	**N2209.04 DN**	2CLA220904N6201	2M	10
Silver	**N2209.04 PL**	2CLA220904N1301	2M	10
Anthracite	**N2209.04 AN**	2CLA220904N1801	2M	10
Matt Black	**N2209.04 NT**	2CLA220904N1501	2M	10

With telephone symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.05 BL**	2CLA210905N1101	1M	10
Dune	**N2109.05 DN**	2CLA210905N6201	1M	10
Silver	**N2109.05 PL**	2CLA210905N1301	1M	10
Anthracite	**N2109.05 AN**	2CLA210905N1801	1M	10
Matt Black	**N2109.05 NT**	2CLA210905N1501	1M	10
White	**N2209.05 BL**	2CLA220905N1101	2M	10
Dune	**N2209.05 DN**	2CLA220905N6201	2M	10
Silver	**N2209.05 PL**	2CLA220905N1301	2M	10
Anthracite	**N2209.05 AN**	2CLA220905N1801	2M	10
Matt Black	**N2209.05 NT**	2CLA220905N1501	2M	10

With open symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.06 BL**	2CLA210906N1101	1M	10
Dune	**N2109.06 DN**	2CLA210906N6201	1M	10
Silver	**N2109.06 PL**	2CLA210906N1301	1M	10
Anthracite	**N2109.06 AN**	2CLA210906N1801	1M	10
Matt Black	**N2109.06 NT**	2CLA210906N1501	1M	10
White	**N2209.06 BL**	2CLA220906N1101	2M	10
Dune	**N2209.06 DN**	2CLA220906N6201	2M	10
Silver	**N2209.06 PL**	2CLA220906N1301	2M	10
Anthracite	**N2209.06 AN**	2CLA220906N1801	2M	10
Matt Black	**N2209.06 NT**	2CLA220906N1501	2M	10

Zenit

Rocker covers with engraved symbols

With close symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.07 BL**	2CLA210907N1101	1M	10
Dune	**N2109.07 DN**	2CLA210907N6201	1M	10
Silver	**N2109.07 PL**	2CLA210907N1301	1M	10
Anthracite	**N2109.07 AN**	2CLA210907N1801	1M	10
Matt Black	**N2109.07 NT**	2CLA210907N1501	1M	10
White	**N2209.07 BL**	2CLA220907N1101	2M	10
Dune	**N2209.07 DN**	2CLA220907N6201	2M	10
Silver	**N2209.07 PL**	2CLA220907N1301	2M	10
Anthracite	**N2209.07 AN**	2CLA220907N1801	2M	10
Matt Black	**N2209.07 NT**	2CLA220907N1501	2M	10

With OFF symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.08 BL**	2CLA210908N1101	1M	10
Dune	**N2109.08 DN**	2CLA210908N6201	1M	10
Silver	**N2109.08 PL**	2CLA210908N1301	1M	10
Anthracite	**N2109.08 AN**	2CLA210908N1801	1M	10
Matt Black	**N2109.08 NT**	2CLA210908N1501	1M	10
White	**N2209.08 BL**	2CLA220908N1101	2M	10
Dune	**N2209.08 DN**	2CLA220908N6201	2M	10
Silver	**N2209.08 PL**	2CLA220908N1301	2M	10
Anthracite	**N2209.08 AN**	2CLA220908N1801	2M	10
Matt Black	**N2209.08 NT**	2CLA220908N1501	2M	10

With DND symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.09 BL**	2CLA210909N1101	1M	10
Dune	**N2109.09 DN**	2CLA210909N6201	1M	10
Silver	**N2109.09 PL**	2CLA210909N1301	1M	10
Anthracite	**N2109.09 AN**	2CLA210909N1801	1M	10
Matt Black	**N2109.09 NT**	2CLA210909N1501	1M	10
White	**N2209.09 BL**	2CLA220909N1101	2M	10
Dune	**N2209.09 DN**	2CLA220909N6201	2M	10
Silver	**N2209.09 PL**	2CLA220909N1301	2M	10
Anthracite	**N2209.09 AN**	2CLA220909N1801	2M	10
Matt Black	**N2209.09 NT**	2CLA220909N1501	2M	10

With MUR symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.10 BL**	2CLA210910N1101	1M	10
Dune	**N2109.10 DN**	2CLA210910N6201	1M	10
Silver	**N2109.10 PL**	2CLA210910N1301	1M	10
Anthracite	**N2109.10 AN**	2CLA210910N1801	1M	10
Matt Black	**N2109.10 NT**	2CLA210910N1501	1M	10
White	**N2209.10 BL**	2CLA220910N1101	2M	10
Dune	**N2209.10 DN**	2CLA220910N6201	2M	10
Silver	**N2209.10 PL**	2CLA220910N1301	2M	10
Anthracite	**N2209.10 AN**	2CLA220910N1801	2M	10
Matt Black	**N2209.10 NT**	2CLA220910N1501	2M	10

With dimmer symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.11 BL**	2CLA210911N1101	1M	10
Dune	**N2109.11 DN**	2CLA210911N6201	1M	10
Silver	**N2109.11 PL**	2CLA210911N1301	1M	10
Anthracite	**N2109.11 AN**	2CLA210911N1801	1M	10
Matt Black	**N2109.11 NT**	2CLA210911N1501	1M	10
White	**N2209.11 BL**	2CLA220911N1101	2M	10
Dune	**N2209.11 DN**	2CLA220911N6201	2M	10
Silver	**N2209.11 PL**	2CLA220911N1301	2M	10
Anthracite	**N2209.11 AN**	2CLA220911N1801	2M	10
Matt Black	**N2209.11 NT**	2CLA220911N1501	2M	10

With VMC symbol

Colour	Type	Order code	Size	Qty.*
White	**N2109.12 BL**	2CLA210912N1101	1M	10
Dune	**N2109.12 DN**	2CLA210912N6201	1M	10
Silver	**N2109.12 PL**	2CLA210912N1301	1M	10
Anthracite	**N2109.12 AN**	2CLA210912N1801	1M	10
Matt Black	**N2109.12 NT**	2CLA210912N1501	1M	10
White	**N2209.12 BL**	2CLA220912N1101	2M	10
Dune	**N2209.12 DN**	2CLA220912N6201	2M	10
Silver	**N2209.12 PL**	2CLA220912N1301	2M	10
Anthracite	**N2209.12 AN**	2CLA220912N1801	2M	10
Matt Black	**N2209.12 NT**	2CLA220912N1501	2M	10

Zenit
Accessories

Decorative trim

Spare decorative trim.
1M trim are suitable for N2101.X, N2102.X, N2110 and N2104.X inserts.
1,5M trim suitable for N2801, N2802 and N2810 inserts.
2M trim suitable for N2201.X, N2202.X, N2210 and N2204.X inserts.
3M trim suitable for N2301, N2302, N2310 and N2304 inserts.

Colour	Type	Order code	Size	Qty.*
White diffuser	**N2170 TL**	2CLA217000N1201	1M	20
White	**N2170 BL**	2CLA217000N1101	1M	20
Dune	**N2170 DN**	2CLA217000N6201	1M	20
Chrome	**N2170 CR**	2CLA217000N1401	1M	20
Anthracite	**N2170 AN**	2CLA217000N1801	1M	20
Matt Black	**N2170 NT**	2CLA217000N1501	1M	20
White diffuser	**N2870 TL**	2CLA287000N1201	1,5M	20
White	**N2870 BL**	2CLA287000N1101	1,5M	20
Dune	**N2870 DN**	2CLA287000N6201	1,5M	20
Chrome	**N2870 CR**	2CLA287000N1401	1,5M	20
Anthracite	**N2870 AN**	2CLA287000N1801	1,5M	20
Matt Black	**N2870 NT**	2CLA287000N1501	1,5M	20
White diffuser	**N2270 TL**	2CLA227000N1201	2M	20
White	**N2270 BL**	2CLA227000N1101	2M	20
Dune	**N2270 DN**	2CLA227000N6201	2M	20
Chrome	**N2270 CR**	2CLA227000N1401	2M	20
Anthracite	**N2270 AN**	2CLA227000N1801	2M	20
Matt Black	**N2270 NT**	2CLA227000N1501	2M	20
White diffuser	**N2370 TL**	2CLA237000N1201	3M	20
White	**N2370 BL**	2CLA237000N1101	3M	20
Dune	**N2370 DN**	2CLA237000N6201	3M	20
Chrome	**N2370 CR**	2CLA237000N1401	3M	20
Anthracite	**N2370 AN**	2CLA237000N1801	3M	20
Matt Black	**N2370 NT**	2CLA237000N1501	3M	20

LED lamp kit for screwless switches / push-buttons

LED color: white.
N2191 BB: Suitable for 1-way SP switches and SP NO push-buttons. LED lamp.
N2192 BB and N2192.2 BB: Suitable for 1-way DP switches,
2-way SP switches and intermediate switches.
N2191 BB and N2192 BB: 230Vac / 0,2mA
N2192.2 BB: 24V / 2mA
Tooless front connection.
Includes diffusers for 1 and 2 module rocker covers.
Rated current: <0,2 mA. Specially designed for CFL and LED lamps.

Colour	Type	Order code	Size	Qty.*
–	**N2191 BB**	2CLA219100N1201	–	10
–	**N2192 BB**	2CLA219200N1201	–	10
–	**N2192.2 BB**	2CLA219220N1201	–	10

LED lamp kit for screw-nut switch / push-button

LED color: white.
Suitable for N2101.T, N2101.2T, N2102.T and N2110.T switches and N2104.7T push-buttons.
LED lamp.
N2194 BB: 230 Vac
N2194.1 BB: 127 Vac
N2194.2 BB: 24 V
Includes diffusers for 1 module rocker covers.
Rear connection.

Colour	Type	Order code	Size	Qty.*
–	**N2194 BB**	2CLA219400N1201	–	20
–	**N2194.1 BB**	2CLA219410N1201	–	20
–	**N2194.2 BB**	2CLA219420N1201	–	20

Zenit
Blind controls

Push-button blind control

Rated voltage: 110 - 250 Vac.
Rated current: 10A.
Direct control.

Colour	Type	Order code	Size	Qty.*
Total White	**N2144 BB**	2CLA214400N1201	1M	5
White	**N2144 BL**	2CLA214400N1101	1M	5
Dune	**N2144 DN**	2CLA214400N6201	1M	5
Silver	**N2144 PL**	2CLA214400N1301	1M	5
Total Anthracite	**N2144 AA**	2CLA214400N1601	1M	5
Anthracite	**N2144 AN**	2CLA214400N1801	1M	5
Matt Black	**N2144 NT**	2CLA214400N1501	1M	5

Push-button blind control

Rated voltage: 110 - 250 Vac.
Rated current: 16A.
Direct control.
Interlocked gangs.

Colour	Type	Order code	Size	Qty.*
Total White	**N2244 BB**	2CLA224400N1201	2M	5
White	**N2244 BL**	2CLA224400N1101	2M	5
Dune	**N2244 DN**	2CLA224400N6201	2M	5
Silver	**N2244 PL**	2CLA224400N1301	2M	5
Total Anthracite	**N2244 AA**	2CLA224400N1601	2M	5
Anthracite	**N2244 AN**	2CLA224400N1801	2M	5
Matt Black	**N2244 NT**	2CLA224400N1501	2M	5

Switch blind control

Rated voltage: 110 - 250 Vac.
Rated current: 10(3)A.
Direct control.

Colour	Type	Order code	Size	Qty.*
Total White	**N2144.1 BB**	2CLA214410N1201	1M	5
White	**N2144.1 BL**	2CLA214410N1101	1M	5
Dune	**N2144.1 DN**	2CLA214410N6201	1M	5
Silver	**N2144.1 PL**	2CLA214410N1301	1M	5
Total Anthracite	**N2144.1 AA**	2CLA214410N1601	1M	5
Anthracite	**N2144.1 AN**	2CLA214410N1801	1M	5
Matt Black	**N2144.1 NT**	2CLA214410N1501	1M	5

Switch blind control

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Direct control.
Interlocked gangs.

Colour	Type	Order code	Size	Qty.*
Total White	**N2244.1 BB**	2CLA224410N1201	2M	5
White	**N2244.1 BL**	2CLA224410N1101	2M	5
Dune	**N2244.1 DN**	2CLA224410N6201	2M	5
Silver	**N2244.1 PL**	2CLA224410N1301	2M	5
Total Anthracite	**N2244.1 AA**	2CLA224410N1601	2M	5
Anthracite	**N2244.1 AN**	2CLA224410N1801	2M	5
Matt Black	**N2244.1 NT**	2CLA224410N1501	2M	5

Electronic blind control 1-gang - 2M

Rated voltage: 110 - 250 Vac; 50/60 Hz.
Rated current: 700VA@230Vac / 350VA@127Vac.
Direct control.
White locator LED included.
Functions:
- PERS: standard blinds control. Optionally other N2244 inserts can be connected to the N2261.2 to control the blind from other locations.
- LAM: venetian type blinds control. Optionally other N2244 inserts can be connected to the N2261.2 to control the blind from other locations.
- Centralization (CEN): one N2261.2 can control all the N2261.2 centrally.

Colour	Type	Order code	Size	Qty.*
White	**N2261.21 BL**	2CLA226121N1101	2M	1
Dune	**N2261.21 DN**	2CLA226121N6201	2M	1
Silver	**N2261.21 PL**	2CLA226121N1301	2M	1
Anthracite	**N2261.21 AN**	2CLA226121N1801	2M	1
Matt Black	**N2261.21 NT**	2CLA226121N1501	2M	1

Zenit
Light controls

LED/Universal rotatory dimmer 220V

Rated voltage: 230 Vac ± 10%. Frequency: 50-60 Hz.
Power (min./max load):
- LEDi (trailing-edge lamps), LV LEDi with transformer type C, LV halogen with transformer (type C or LC) and incandescent and halogen lamps: 4 / 250 W/VA.
- LEDi (leading-edge lamps) and LV LEDi with transformer type LC: 4 / 60 W/VA (max. 10 lamps).

Load selection
2 or 3 wire connection.
OFF position
Electronic back-up fuse & overload protection.

Colour	Type	Order code	Size	Qty.*
White	**N2160.3 BL**	2CLA216030N1101	1M	1
Dune	**N2160.3 DN**	2CLA216030N6201	1M	1
Silver	**N2160.3 PL**	2CLA216030N1301	1M	1
Anthracite	**N2160.3 AN**	2CLA216030N1801	1M	1
Matt Black	**N2160.3 NT**	2CLA216030N1501	1M	1

LED/Universal rotatory dimmer 110V

Rated voltage: 127 Vac ± 10%. Frequency: 60 Hz.
Power (min./max load):
- LEDi (trailing-edge lamps), LV LEDi with transformer type C, LV halogen with transformer (type C or LC) and incandescent and halogen lamps: 4 / 125 W/VA.
- LEDi (leading-edge lamps) and LV LEDi with transformer type LC: 4 / 30 W/VA (max. 10 lamps).

Load selection
2 or 3 wire connection.
OFF position
Electronic back-up fuse & overload protection.

Colour	Type	Order code	Size	Qty.*
White	**N2160.8 BL**	2CLA216080N1101	1M	1
Dune	**N2160.8 DN**	2CLA216080N6201	1M	1
Silver	**N2160.8 PL**	2CLA216080N1301	1M	1
Anthracite	**N2160.8 AN**	2CLA216080N1801	1M	1
Matt Black	**N2160.8 NT**	2CLA216080N1501	1M	1

LED rotatory/push dimmer - 2M

Rated voltage: 230 Vac ± 10%.
Frequency: 50 Hz (250 W/VA) / 60 Hz (200 W/VA).
Power (min./max load):
- LEDi, dimmable CFL and LV LEDi with transformer (L or LC): 2 / 100 W/VA (max. 10 lamps.).
- Incandescent and halogen lamps: 10 / 250 W/VA.
- LV halogen w/transformer (L or LC): 10 / 250 W/VA (max. 10 lamps).

2 wire connection.
Optional: auxiliary on/off with 2-way switch N2X02.
Indicator LED lamp included.
Electronic back-up fuse & overload protection.

Colour	Type	Order code	Size	Qty.*
White	**N2260.3 BL**	2CLA226030N1101	2M	1
Dune	**N2260.3 DN**	2CLA226030N6201	2M	1
Silver	**N2260.3 PL**	2CLA226030N1301	2M	1
Anthracite	**N2260.3 AN**	2CLA226030N1801	2M	1
Matt Black	**N2260.3 NT**	2CLA226030N1501	2M	1

1-10V rotary dimmer

Rated voltage: 127 - 230 Vac / 50 - 60 Hz
Dimmable electronic ballast/driver.
1-10V control input.
Max. power (max. 6 ballasts per device): 700 VA @ 230 Vac / 350 VA @ 127 Vac.
Indicator LED lamp included.

Colour	Type	Order code	Size	Qty.*
White	**N2260.9 BL**	2CLA226090N1101	2M	1
Dune	**N2260.9 DN**	2CLA226090N6201	2M	1
Silver	**N2260.9 PL**	2CLA226090N1301	2M	1
Anthracite	**N2260.9 AN**	2CLA226090N1801	2M	1
Matt Black	**N2260.9 NT**	2CLA226090N1501	2M	1

Time delayed switch

Rated voltage: 230 Vac / 50 Hz.
Power:
- Incandescent: 40 - 500 W.
- Halogen with transformer: 40 - 400 VA.
- Motors: 40 - 100 VA.

2 wire connection.
Delay setup: 10 sec. to 10 min.
Overcurrent protection: with fuse.
Indicator LED lamp included

Colour	Type	Order code	Size	Qty.*
White	**N2262.1 BL**	2CLA226210N1101	2M	1
Dune	**N2262.1 DN**	2CLA226210N6201	2M	1
Silver	**N2262.1 PL**	2CLA226210N1301	2M	1
Anthracite	**N2262.1 AN**	2CLA226210N1801	2M	1
Matt Black	**N2262.1 NT**	2CLA226210N1501	2M	1

Rated voltage:
- 8132.2: 230 Vac / 50Hz.
- 8132.1: 127 Vac / 60Hz.

Rated current: 10A. NO contact. Single pole.
Power (230 / 127 Vac):
- LED lamps: 400 / 200 W.
- Incandescent / Halogen lamps: 2.000 / 1.000 W.
- LV halogen lamps with transf. (12 V): 1.000 / 500 W.
- Fluorescent lamps: 600 / 300 W (60µF).

Zero crossing technology.
Standby and operating consumption: 0 mW.
Dimensions: 61 (46) x 32 x 19mm (without flaps)
To be controlled with N2X04.X push-buttons.

Voltage	Type	Order code	Size	Qty.*
230 Vac	**8132.2**	2CLA813220A1001		1
127 Vac	**8132.1**	2CLA813210A1003		1

Zenit
Light controls

Friends of Hue smart switch

Wireless remote control of Philips Hue lamps (switching and dimming). Requires Philips Hue Bridge (2nd generation square construction type) and Philips Hue app (Version 3.2 or higher).
Maximum of 2 individual light scenes.
Energy harvesting technology: without battery and maintenance-free.
Compatible with N2225.1 and N2225.2 rockers.

Colour	Type	Order code	Size	Qty.*
–	**N2225**	2CLA222500N1001	2M	1

Bluetooth smart switch

Bluetooth Low Energy (BLE) smart sensor for remotely switching, dimming and calling up scenes of the following Bluetooth ecosystems: Aruba, Casambi, Enlighted, Fulham, Helvar, Hytronik, Lumobi, Qeedji, Silvair, Blu2Light Vossloh Schwabe), WIislicia, Xicato Controls. 2 / 4 channel.
Energy harvesting technology: without battery and maintenance-free. Encrypted transmission with AES-128 (CBC mode) and sequence counter. Contains NFC interface according to NFC Forum Type 2 Tag (ISO/IEC 14443 Part 2+3). Compatible with N2225.1 and N2225.2 rockers.

Colour	Type	Order code	Size	Qty.*
–	**N2225.1**	2CLA222510N1001	2M	1

Rocker cover for smart switch

Rocker cover without symbol for smart switch sensor.
Suitable for codes: N2225, N2225.1 and N2225.2.
Rocker cover for 1-gang control (2 channels).

Colour	Type	Order code	Size	Qty.*
White	**N2225.1 BL**	2CLA222510N1101	2M	1
Dune	**N2225.1 DN**	2CLA222510N6201	2M	1
Silver	**N2225.1 PL**	2CLA222510N1301	2M	1
Anthracite	**N2225.1 AN**	2CLA222510N1801	2M	1
Matt Black	**N2225.1 NT**	2CLA222510N1501	2M	1

Rocker cover for smart switch

Rocker cover without symbol for smart switch sensor.
Suitable for codes: N2225, N2225.1 and N2225.2.
Rocker cover for 2-gang control (4 channels).

Colour	Type	Order code	Size	Qty.*
White	**N2225.2 BL**	2CLA222520N1101	2M	1
Dune	**N2225.2 DN**	2CLA222520N6201	2M	1
Silver	**N2225.2 PL**	2CLA222520N1301	2M	1
Anthracite	**N2225.2 AN**	2CLA222520N1801	2M	1
Matt Black	**N2225.2 NT**	2CLA222520N1501	2M	1

Motion sensor

Rated voltage: 230 Vac ± 10% / 50 - 60 Hz
Outputs: 1 Normally Open (NO). Potential free.
Zero crossing.
Max. power:
- Incandescent and halogen: 800W.
- Halogen with electronic o ferromagnetic transformer: 500VA.
- Fluorescent lamps and CFL: 200VA.
- LED: 200 VA.

Switch-off delay: 5 sec (test) and 30 sec to 15 min (adjustable from the front side).
Detection range: 7 m radious (at 20° C).
Light set point level for activation: 5 to 100 lux (adjustable from the front side).
Detection angle: 110° (at 20° C).
Note: to be installed in boxes with 50mm depth or more.

Colour	Type	Order code	Size	Qty.*
White	**N2141 BL**	2CLA214100N1101	1M	1
Dune	**N2141 DN**	2CLA214100N6201	1M	1
Silver	**N2141 PL**	2CLA214100N1301	1M	1
Anthracite	**N2141 AN**	2CLA214100N1801	1M	1
Matt Black	**N2141 NT**	2CLA214100N1501	1M	1

Motion sensor

Rated voltage: 230 Vac ± 10% / 50/60 Hz.
Outputs: 1 Normally Open (NO). 230 Vac.
Zero crossing.
Max. power:
- Incandescent and halogen: 3.000W.
- Halogen with electronic: 3.000W.
- Halogen ferromagnetic transformer: 2.400W.
- Fluorescent lamps: 1.300W.
- LED: 400 W.

Switch-off delay: 30 sec to 10 min
Removable front side for adjustment (time and lux).
Detection range: 8 m radius (at 18° C and 1,2m high).
Light set point level for activation: 3 to 100 lux.
Detection angle: 200° (at 18° C).

Colour	Type	Order code	Size	Qty.*
White	**N2241.1 BL**	2CLA224110N1101	2M	1
Dune	**N2241.1 DN**	2CLA224110N6201	2M	1
Silver	**N2241.1 PL**	2CLA224110N1301	2M	1
Anthracite	**N2241.1 AN**	2CLA224110N1801	2M	1
Matt Black	**N2241.1 NT**	2CLA224110N1501	2M	1

Zenit

Temperature and air controls

Programmable thermostat

Electronic time-programmable thermostat.
Day/week programming.
Summer/winter function.
LCD display.
Output: 1x NO + 1x NC. Potential free. Max.: 8(2)A
Power supply: 2x 1.5V AA type battery (LR6).

Colour	Type	Order code	Size	Qty.*
White	**N2340 BL**	2CLA234000N1101	3M	1
Dune	**N2340 DN**	2CLA234000N6201	3M	1
Silver	**N2340 PL**	2CLA234000N1301	3M	1
Anthracite	**N2340 AN**	2CLA234000N1801	3M	1
Matt Black	**N2340 NT**	2CLA234000N1501	3M	1

Rotatory thermostat for underfloor heating

Rated voltage: 230 Vac ±1 0% / 50-60 Hz.
Load power: 2.300 W.
Load type: floor heating resistor.
Control temperature: +5°C to +45°C (Set point).
With OFF position: relay output contact open.
Temperature accuracy: 0,5° C. Hysteresis: 0,5° C.
Floor temperature sensor: NTC, 10 KΩ at 25° C (4 m)

Colour	Type	Order code	Size	Qty.*
White	**N2240.3 BL**	2CLA224030N1101	2M	1
Dune	**N2240.3 DN**	2CLA224030N6201	2M	1
Silver	**N2240.3 PL**	2CLA224030N1301	2M	1
Anthracite	**N2240.3 AN**	2CLA224030N1801	2M	1
Matt Black	**N2240.3 NT**	2CLA224030N1501	2M	1

Rotatory 3-speed fan control

Rated voltage: 127 Vac / 60 Hz.
Rated current: 1,5 A.
Load type: ceiling fan.
4 control positions: OFF (0), MIN (I), MED (II), MAX (III).

Colour	Type	Order code	Size	Qty.*
White	**N2254.1 BL**	2CLA225410N1101	2M	1
Dune	**N2254.1 DN**	2CLA225410N6201	2M	1
Silver	**N2254.1 PL**	2CLA225410N1301	2M	1
Anthracite	**N2254.1 AN**	2CLA225410N1801	2M	1
Matt Black	**N2254.1 NT**	2CLA225410N1501	2M	1

VMC control

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Interlocked gangs.
OFF, low speed and high speed positions and symbols.

Colour	Type	Order code	Size	Qty.*
Total White	**N2254.3 BB**	2CLA225430N1201	2M	5
White	**N2254.3 BL**	2CLA225430N1101	2M	5
Dune	**N2254.3 DN**	2CLA225430N6201	2M	5
Silver	**N2254.3 PL**	2CLA225430N1301	2M	5
Total Anthracite	**N2254.3 AA**	2CLA225430N1601	2M	5
Anthracite	**N2254.3 AN**	2CLA225430N1801	2M	5
Matt Black	**N2254.3 NT**	2CLA225430N1501	2M	5

Key switches

2-way key switch, 3 positions, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 5A.
Key removable in the 3 positions.
Unique key for each lock.
Suitable for blinds, shutters, etc.

Colour	Type	Order code	Size	Qty.*
White	**N2153.1 BL**	2CLA215310N1101	1M	1
Dune	**N2153.1 DN**	2CLA215310N6201	1M	1
Silver	**N2153.1 PL**	2CLA215310N1301	1M	1
Anthracite	**N2153.1 AN**	2CLA215310N1801	1M	1
Matt Black	**N2153.1 NT**	2CLA215310N1501	1M	1

1- way key switch, 2 positions, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 5A.
Key removable in the 2 positions.
Unique key for each lock.
Suitable for alarms.

Colour	Type	Order code	Size	Qty.*
White	**N2253 BL**	2CLA225300N1101	2M	1
Matt Black	**N2253 NT**	2CLA225300N1501	2M	1
Dune	**N2253 DN**	2CLA225300N6201	2M	1
Silver	**N2253 PL**	2CLA225300N1301	2M	1
Anthracite	**N2253 AN**	2CLA225300N1801	2M	1

2-way key switch, 3 positions, single pole

Unique key for each lock.
Suitable for blinds, shutters, etc.
Rated voltage: 110 - 250 Vac.
Rated current: 150mA.
Key removable in “OFF” position.

Colour	Type	Order code	Size	Qty.*
White	**N2253.1 BL**	2CLA225310N1101	2M	1
Dune	**N2253.1 DN**	2CLA225310N6201	2M	1
Silver	**N2253.1 PL**	2CLA225310N1301	2M	1
Anthracite	**N2253.1 AN**	2CLA225310N1801	2M	1
Matt Black	**N2253.1 NT**	2CLA225310N1501	2M	1

Key push-button, 2 positions, single pole

Rated voltage: 110 - 250 Vac.
Rated current: 5A.
Key removable in “OFF” position.
Unique key for each lock. Suitable for alarms.

Colour	Type	Order code	Size	Qty.*
White	**N2253.2 BL**	2CLA225320N1101	2M	1
Dune	**N2253.2 DN**	2CLA225320N6201	2M	1
Silver	**N2253.2 PL**	2CLA225320N1301	2M	1
Anthracite	**N2253.2 AN**	2CLA225320N1801	2M	1
Matt Black	**N2253.2 NT**	2CLA225320N1501	2M	1

Zenit

Card switches

Card switch, double pole

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
For 54mm width cards.
Included: LED lamp N2193 BB.

Colour	Type	Order code	Size	Qty.*
White	**N2214.1 BL**	2CLA221410N1101	2M	10
Dune	**N2214.1 DN**	2CLA221410N6201	2M	10
Silver	**N2214.1 PL**	2CLA221410N1301	2M	10
Anthracite	**N2214.1 AN**	2CLA221410N1801	2M	10
Matt Black	**N2214.1 NT**	2CLA221410N1501	2M	10

LED lamp kit for card switch

LED color: white.
Suitable for N2214.1 card switches.
230Vac / 0,7mA. Tooless front connection.

Colour	Type	Order code	Size	Qty.*
–	**N2193 BB**	2CLA219300N1201	–	20

Card timer switch, single pole

Rated current (230Vac / 127Vac):
- Incandescent/halogen: 3.000W / 1.600W.
- Fluorescent: 1.300VA / 700VA.
- Electronic and ferromag. transf. and motors: 3.000VA / 1.600VA. For 54mm width cards.

Locator LED lamp included.
Adjustable time-out: 5 - 90 seconds.

Colour	Type	Order code	Size	Qty.*
White	**N2214.5 BL**	2CLA221450N1101	2M	1
Dune	**N2214.5 DN**	2CLA221450N6201	2M	1
Silver	**N2214.5 PL**	2CLA221450N1301	2M	1
Anthracite	**N2214.5 AN**	2CLA221450N1801	2M	1
Matt Black	**N2214.5 NT**	2CLA221450N1501	2M	1

Card switch with RFID

Rated voltage: 110 - 230 Vac; ±10 %, 50/60 Hz.
RFID technology: 13.56 MHz - ISO14443B / Mifare ISO14443A standard. 4 modes: Eco, Standard, Extended. Status backlight: Yes
Adjustable time-out: 0-240 seconds.
Outputs: 2 Normally Open (NO).
Maximum load (110 Vac / 230 Vac):
- LEDi: 2x 100 W / 2x 30 W.
- CFL and ESL: 2x 700 W / 2x 330 W.
- Halogen with electronic: 2x 1.000 W / 2x 475 W.
- Halogen ferromagnetic transf.: 2x 800 W / 2x 375 W.
- Incandescent and halogen lamps: 2x 1.200 W / 2x 570 W.
- Blind control (M-type) max. 2x 2 Aem .

Colour	Type	Order code	Size	Qty.*
White	**N2214.6 BL**	2CLA221460N1101	2M	1
Dune	**N2214.6 DN**	2CLA221460N6201	2M	1
Silver	**N2214.6 PL**	2CLA221460N1301	2M	1
Anthracite	**N2214.6 AN**	2CLA221460N1801	2M	1
Matt Black	**N2214.6 NT**	2CLA221460N1501	2M	1

Micro-switches

Micro-switch 2 channels

Digital micro-switch control 2 channels
Rated voltage: 5 - 24 Vac or Vdc
Rated current: 50 mA.
Normally Opened (NO) contact
Included: 2 indicator LED lamps

Colour	Type	Order code	Size	Qty.*
Total White	**N2205.1 BB**	2CLA220510N1201	2M	1
White	**N2205.1 BL**	2CLA220510N1101	2M	1
Dune	**N2205.1 DN**	2CLA220510N6201	2M	1
Silver	**N2205.1 PL**	2CLA220510N1301	2M	1
Total Anthracite	**N2205.1 AA**	2CLA220510N1601	2M	1
Anthracite	**N2205.1 AN**	2CLA220510N1801	2M	1
Matt Black	**N2205.1 NT**	2CLA220510N1501	2M	1

Micro-switch 4 channels

Digital micro-switch control 4 channels
Rated voltage: 5 - 24 Vac or Vdc
Rated current: 50 mA.
Normally Opened (NO) contact
Included: 4 indicator LED lamps

Colour	Type	Order code	Size	Qty.*
Total White	**N2205.2 BB**	2CLA220520N1201	2M	1
White	**N2205.2 BL**	2CLA220520N1101	2M	1
Dune	**N2205.2 DN**	2CLA220520N6201	2M	1
Silver	**N2205.2 PL**	2CLA220520N1301	2M	1
Total Anthracite	**N2205.2 AA**	2CLA220520N1601	2M	1
Anthracite	**N2205.2 AN**	2CLA220520N1801	2M	1
Matt Black	**N2205.2 NT**	2CLA220520N1501	2M	1

Micro-switch 6 channels

Digital micro-switch control 6 channels
Rated voltage: 5 - 24 Vac or Vdc
Rated current: 50 mA.
Normally Opened (NO) contact
Included: 6 indicator LED lamps

Colour	Type	Order code	Size	Qty.*
Total White	**N2205.3 BB**	2CLA220530N1201	2M	1
White	**N2205.3 BL**	2CLA220530N1101	2M	1
Dune	**N2205.3 DN**	2CLA220530N6201	2M	1
Silver	**N2205.3 PL**	2CLA220530N1301	2M	1
Total Anthracite	**N2205.3 AA**	2CLA220530N1601	2M	1
Anthracite	**N2205.3 AN**	2CLA220530N1801	2M	1
Matt Black	**N2205.3NT**	2CLA220530N1501	2M	1

Zenit

Push-button & switch for BA/HA controls

Double push-button

Rated voltage: 250 Vac.
Rated current: 10A.
Outputs: 2 Normally Open (NO).
Compatible with N2109.4X rockers.

Colour	Type	Order code	Size	Qty.*
–	**N2144**	2CLA214400N1001	–	5

Double 1-way switch

Rated voltage: 250 Vac.
Rated current: 10(3)A.
2- way switch with center-off.
Compatible with N2109.4X rockers.

Colour	Type	Order code	Size	Qty.*
–	**N2144.1**	2CLA214410N1001	–	5

Rocker cover for double push-button and switch

Rocker cover without symbol for N2144 push-button and N2144.1 switch.

Without symbol

Colour	Type	Order code	Size	Qty.*
Total White	**N2109.40 BB**	2CLA210940N1201	1M	10
White	**N2109.40 BL**	2CLA210940N1101	1M	10
Dune	**N2109.40 DN**	2CLA210940N6201	1M	10
Silver	**N2109.40 PL**	2CLA210940N1301	1M	10
Total Anthracite	**N2109.40 AA**	2CLA210940N1601	1M	10
Anthracite	**N2109.40 AN**	2CLA210940N1801	1M	10
Matt Black	**N2109.40 NT**	2CLA210940N1501	1M	10

With lamp symbol

Colour	Type	Order code	Size	Qty.*
Total White	**N2109.42 BB**	2CLA210942N1201	1M	10
White	**N2109.42 BL**	2CLA210942N1101	1M	10
Dune	**N2109.42 DN**	2CLA210942N6201	1M	10
Silver	**N2109.42 PL**	2CLA210942N1301	1M	10
Total Anthracite	**N2109.42 AA**	2CLA210942N1601	1M	10
Anthracite	**N2109.42 AN**	2CLA210942N1801	1M	10
Matt Black	**N2109.42 NT**	2CLA210942N1501	1M	10

With blind symbol

Colour	Type	Order code	Size	Qty.*
Total White	**N2109.43 BB**	2CLA210943N1201	1M	10
White	**N2109.43 BL**	2CLA210943N1101	1M	10
Dune	**N2109.43 DN**	2CLA210943N6201	1M	10
Silver	**N2109.43 PL**	2CLA210943N1301	1M	10
Total Anthracite	**N2109.43 AA**	2CLA210943N1601	1M	10
Anthracite	**N2109.43 AN**	2CLA210943N1801	1M	10
Matt Black	**N2109.43 NT**	2CLA210943N1501	1M	10

With DND/MUR symboll

Colour	Type	Order code	Size	Qty.*
Total White	**N2109.44 BB**	2CLA210944N1201	1M	10
White	**N2109.44 BL**	2CLA210944N1101	1M	10
Dune	**N2109.44 DN**	2CLA210944N6201	1M	10
Silver	**N2109.44 PL**	2CLA210944N1301	1M	10
Total Anthracite	**N2109.44 AA**	2CLA210944N1601	1M	10
Anthracite	**N2109.44 AN**	2CLA210944N1801	1M	10
Matt Black	**N2109.44 NT**	2CLA210944N1501	1M	10

ONOFF With ON/OFF symbol

Colour	Type	Order code	Size	Qty.*
Total White	**N2109.45 BB**	2CLA210945N1201	1M	10
White	**N2109.45 BL**	2CLA210945N1101	1M	10
Dune	**N2109.45 DN**	2CLA210945N6201	1M	10
Silver	**N2109.45 PL**	2CLA210945N1301	1M	10
Total Anthracite	**N2109.45 AA**	2CLA210945N1601	1M	10
Anthracite	**N2109.45 AN**	2CLA210945N1801	1M	10
Matt Black	**N2109.45 NT**	2CLA210945N1501	1M	10

With dimmer symbol

Colour	Type	Order code	Size	Qty.*
Total White	**N2109.46 BB**	2CLA210946N1201	1M	10
White	**N2109.46 BL**	2CLA210946N1101	1M	10
Dune	**N2109.46 DN**	2CLA210946N6201	1M	10
Silver	**N2109.46 PL**	2CLA210946N1301	1M	10
Total Anthracite	**N2109.46 AA**	2CLA210946N1601	1M	10
Anthracite	**N2109.46 AN**	2CLA210946N1801	1M	10
Matt Black	**N2109.46 NT**	2CLA210946N1501	1M	10

With scene symbol

Colour	Type	Order code	Size	Qty.*
Total White	**N2109.47 BB**	2CLA210947N1201	1M	10
White	**N2109.47 BL**	2CLA210947N1101	1M	10
Dune	**N2109.47 DN**	2CLA210947N6201	1M	10
Silver	**N2109.47 PL**	2CLA210947N1301	1M	10
Total Anthracite	**N2109.47 AA**	2CLA210947N1601	1M	10
Anthracite	**N2109.47 AN**	2CLA210947N1801	1M	10
Matt Black	**N2109.47 NT**	2CLA210947N1501	1M	10

With VMC fan symbol

Colour	Type	Order code	Size	Qty.*
Total White	**N2109.48 BB**	2CLA210948N1201	1M	10
White	**N2109.48 BL**	2CLA210948N1101	1M	10
Dune	**N2109.48 DN**	2CLA210948N6201	1M	10
Silver	**N2109.48 PL**	2CLA210948N1301	1M	10
Total Anthracite	**N2109.48 AA**	2CLA210948N1601	1M	10
Anthracite	**N2109.48 AN**	2CLA210948N1801	1M	10
Matt Black	**N2109.48 NT**	2CLA210948N1501	1M	10

Zenit

DND / MUR systems

DND corridor signaling light

Rated voltage: 127-230 Vac / 50-60 Hz.
Lamp: LED.
Luminous flux: > 2 lumen at 1 meter.
Red diffuser.
Do Not Disturb (DND) symbol.
To be controlled with N2244.5 or N2244.4 DND/ MUR room switch.

Colour	Type	Order code	Size	Qty.*
White	**N2180.4 BL**	2CLA218040N1101	1M	5
Dune	**N2180.4 DN**	2CLA218040N6201	1M	5
Silver	**N2180.4 PL**	2CLA218040N1301	1M	5
Anthracite	**N2180.4 AN**	2CLA218040N1801	1M	5
Matt Black	**N2180.4 NT**	2CLA218040N1501	1M	5

MUR corridor signaling light

Rated voltage: 127-230 Vac / 50-60 Hz.
Lamp: LED.
Luminous flux: > 2 lumen at 1 meter.
Green diffuser.
Make Up Room (MUR) symbol.
To be controlled with N2244.5 or N2244.4 DND/ MUR room switch.

Colour	Type	Order code	Size	Qty.*
White	**N2180.5 BL**	2CLA218050N1101	1M	5
Dune	**N2180.5 DN**	2CLA218050N6201	1M	5
Silver	**N2180.5 PL**	2CLA218050N1301	1M	5
Anthracite	**N2180.5 AN**	2CLA218050N1801	1M	5
Matt Black	**N2180.5 NT**	2CLA218050N1501	1M	5

DND/MUR corridor signaling light

Rated voltage: 127-230 Vac / 50-60 Hz.
Lamp: red/green LED.
Luminous flux: > 2 lumen at 1 meter.
White diffuser.

Colour	Type	Order code	Size	Qty.*
Red/Green	**N2280.2 RJ/VD**	2CLA228020N1101	2M	1

Bell push-button with DND/MUR LED indicator

Rated voltage: 110 - 250 Vac
Rated current: 10A
Red Do Not Disturb and green Make Up Room LED signaling included.
Push-button with bell symbol.
To be connected to N2244.4 or N2244.5 DND/ MUR room module and N2224 or N2224.1 electronic bell or N2119 or N2219 buzzer.

Colour	Type	Order code	Size	Qty.*
Total White	**N2280.4 BB**	2CLA228040N1201	2M	5
White	**N2280.4 BL**	2CLA228040N1101	2M	5
Dune	**N2280.4 DN**	2CLA228040N6201	2M	5
Silver	**N2280.4 PL**	2CLA228040N1301	2M	5
Total Anthracite	**N2280.4 AA**	2CLA228040N1601	2M	5
Anthracite	**N2280.4 AN**	2CLA228040N1801	2M	5
Matt Black	**N2280.4 NT**	2CLA228040N1501	2M	5

DND/MUR illuminated room switch

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Non interlocked gangs.
Make Up Room (MUR) green symbol and indicator LED.
Do Not Disturb (DND) red symbol and indicator LED.
To be connected to N2280.4 or N2180.4 and N2180.5 corridor modules.

Colour	Type	Order code	Size	Qty.*
Total White	**N2244.4 BB**	2CLA224440N1201	2M	5
White	**N2244.4 BL**	2CLA224440N1101	2M	5
Dune	**N2244.4 DN**	2CLA224440N6201	2M	5
Silver	**N2244.4 PL**	2CLA224440N1301	2M	5
Total Anthracite	**N2244.4 AA**	2CLA224440N1601	2M	5
Anthracite	**N2244.4 AN**	2CLA224440N1801	2M	5
Matt Black	**N2244.4 NT**	2CLA224440N1501	2M	5

DND/MUR interlocked room switch

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Interlocked gangs.
Gang 1: Make Up Room (MUR) green symbol.
Gang 2: Do Not Disturb (DND) red symbol.
To control N2180.4 & N2180.5 DND/MUR corridor signaling lights or N2280.4 DND/MUR corridor push-button.

Colour	Type	Order code	Size	Qty.*
Total White	**N2244.5 BB**	2CLA224450N1201	2M	5
White	**N2244.5 BL**	2CLA224450N1101	2M	5
Dune	**N2244.5 DN**	2CLA224450N6201	2M	5
Silver	**N2244.5 PL**	2CLA224450N1301	2M	5
Total Anthracite	**N2244.5 AA**	2CLA224450N1601	2M	5
Anthracite	**N2244.5 AN**	2CLA224450N1801	2M	5
Matt Black	**N2244.5 NT**	2CLA224450N1501	2M	5

Zenit

Signaling and lighting systems

LED signaling light

Rated voltage: 127-230 Vac / 50-60 Hz.
Lamp: LED.
Luminous flux: > 2 lumen at 1 meter.

Colour	Type	Order code	Size	Qty.*
White	**N2180 BL**	2CLA218000N1101	1M	5
Red	**N2180 RJ**	2CLA218000N1601	1M	5
Green	**N2180 VD**	2CLA218000N1801	1M	5

LED warm white signaling light

Rated voltage: 127-230 Vac / 50-60 Hz.
Lamp: white LED. 2.700 Kelvin.
Low luminous flux: < 0,5 lumen at 0,3 meter.
White diffuser.

Colour	Type	Order code	Size	Qty.*
N2180.1 BL	White	2CLA218010N1101	1M	1

LED signaling light

Rated voltage: 127-230 Vac / 50-60 Hz.
Lamp: white LED.
Luminous flux: > 2 lumen at 1 meter.
White diffuser.

Colour	Type	Order code	Size	Qty.*
N2280 BL	White	2CLA228000N1101	2M	1

Labels for signaling / beacon lights

Labels with symbols for signaling and beacon lights code: N2280 and N2280.2.
Symbols: “WC men”, “WC women”, “No smoking”, “Direction”, “WC handic.”, “WC”, “Salida” and no symbol label.

Colour	Type	Order code	Size	Qty.*
–	**N2281.1**	2CLA228110N1001	–	5

Beacon LED light

Rated voltage: 230 Vac ± 10% / 50 - 60 Hz .
Lamp: white LED. White diffuser.
Light intensity: 2400 med.
Beam angle: 120°.
Autonomy: 2 hours.
Battery: Ni-MH (not replaceable).
Note: to be installed in boxes with 50mm depth or more.

Colour	Type	Order code	Size	Qty.*
White	**N2181 BL**	2CLA218100N1101	1M	1

Withdrawable beacon LED light

Rated voltage: 230 Vac ± 10% / 50 - 60 Hz .
Lamp: white LED. White diffuser.
Light intensity: 20 lumens.
Beam angle: 120°.
Autonomy: 2 hours.
Battery: Ni-MH (not replaceable).
Note: to be installed in boxes with 50mm depth or more.

Colour	Type	Order code	Size	Qty.*
White	**N2281.2 BL**	2CLA228120N1101	2M	1

Zenit

Buzzer / Door bell

Buzzer



Rated voltage: 127-230 Vac / 50-60 Hz.
Rated power: 8 VA.
Adjustable tone.
Acoustic power at 1 meter with cover plate: 75 dB.

Colour	Type	Order code	Size	Qty.*
White	**N2119 BL**	2CLA211900N1101	1M	10
Dune	**N2119 DN**	2CLA211900N6201	1M	10
Silver	**N2119 PL**	2CLA211900N1301	1M	10
Anthracite	**N2119 AN**	2CLA211900N1801	1M	10
Matt Black	**N2119 NT**	2CLA211900N1501	1M	10
White	**N2219 BL**	2CLA221900N1101	2M	10
Dune	**N2219 DN**	2CLA221900N6201	2M	10
Silver	**N2219 PL**	2CLA221900N1301	2M	10
Anthracite	**N2219 AN**	2CLA221900N1801	2M	10
Matt Black	**N2219 NT**	2CLA221900N1501	2M	10

Electronic door bell

Rated voltage:
- N2224: 230 Vac / 50-60 Hz.
- N2224.1: 127 Vac / 60 Hz.

4 melodies available.
Acoustic power at 1 meter with cover plate: 72 dB.

Colour	Type	Order code	Size	Qty.*
White	**N2224 BL**	2CLA222400N1101	1M	1
Dune	**N2224 DN**	2CLA222400N6201	1M	1
Silver	**N2224 PL**	2CLA222400N1301	1M	1
Anthracite	**N2224 AN**	2CLA222400N1801	1M	1
Matt Black	**N2224 NT**	2CLA222400N1501	1M	1
White	**N2224.1 BL**	2CLA222410N1101	2M	1
Dune	**N2224.1 DN**	2CLA222410N6201	2M	1
Silver	**N2224.1 PL**	2CLA222410N1301	2M	1
Anthracite	**N2224.1 AN**	2CLA222410N1801	2M	1
Matt Black	**N2224.1 NT**	2CLA222410N1501	2M	1

Blank covers / Cable outlets

Blank cover plate

Blank cover plate for spare spaces.

Colour	Type	Order code	Size	Qty.*
White	**N2000 BL**	2CLA200000N1101	0,5M	20
Dune	**N2000 DN**	2CLA200000N6201	0,5M	20
Silver	**N2000 PL**	2CLA200000N1301	0,5M	20
Anthracite	**N2000 AN**	2CLA200000N1801	0,5M	20
Matt Black	**N2000 NT**	2CLA200000N1501	0,5M	20
White	**N2100 BL**	2CLA210000N1101	1M	10
Dune	**N2100 DN**	2CLA210000N6201	1M	10
Silver	**N2100 PL**	2CLA210000N1301	1M	10
Anthracite	**N2100 AN**	2CLA210000N1801	1M	10
Matt Black	**N2100 NT**	2CLA210000N1501	1M	10
White	**N2200 BL**	2CLA220000N1101	2M	20
Dune	**N2200 DN**	2CLA220000N6201	2M	20
Silver	**N2200 PL**	2CLA220000N1301	2M	20
Anthracite	**N2200 AN**	2CLA220000N1801	2M	20
Matt Black	**N2200 NT**	2CLA220000N1501	2M	20

Cable outlet



Maximum cable diameter: 6 mm.
Cable tie included.

Colour	Type	Order code	Size	Qty.*
White	**N2107 BL**	2CLA210700N1101	1M	10
Dune	**N2107 DN**	2CLA210700N6201	1M	10
Silver	**N2107 PL**	2CLA210700N1301	1M	10
Anthracite	**N2107 AN**	2CLA210700N1801	1M	10
Matt Black	**N2107 NT**	2CLA210700N1501	1M	10
White	**N2207 BL**	2CLA220700N1101	2M	10
Dune	**N2207 DN**	2CLA220700N6201	2M	10
Silver	**N2207 PL**	2CLA220700N1301	2M	10
Anthracite	**N2207 AN**	2CLA220700N1801	2M	10
Matt Black	**N2207 NT**	2CLA220700N1501	2M	10

Zenit
Socket outlets

Schuko socket outlet

Rated voltage: 250 Vac.
Rated current: 16A.
Type F: 2P + E.
Shuttered for child safety.
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2288 BL**	2CLA228800N1101	2M	10
Dune	**N2288 DN**	2CLA228800N6201	2M	10
Silver	**N2288 PL**	2CLA228800N1301	2M	10
Anthracite	**N2288 AN**	2CLA228800N1801	2M	10
Matt Black	**N2288 NT**	2CLA228800N1501	2M	10
Red	**N2288 RJ**	2CLA228800N7001	2M	5
Green	**N2288 VD**	2CLA228800N8001	2M	5
Orange	**N2288 NA**	2CLA228800N9001	2M	5

Schuko socket outlet srewless terminal

Rated voltage: 250 Vac.
Rated current: 16A.
Type F: 2P + E.
Shuttered for child safety.
Screwless terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2288.6 BL**	2CLA228860N1101	2M	10
Dune	**N2288.6 DN**	2CLA228860N6201	2M	10
Silver	**N2288.6 PL**	2CLA228860N1301	2M	10
Anthracite	**N2288.6 AN**	2CLA228860N1801	2M	10
Matt Black	**N2288.6 NT**	2CLA228860N1501	2M	10

Schuko socket outlet with lid

Rated voltage: 250 Vac.
Rated current: 16A.
Type F: 2P + E.
Shuttered for child safety.
Screw-nut terminals.
Lid with notch. 180° opening.
IP44 in combination with frames N2271.44, N2272.44 or N2273.44

Colour	Type	Order code	Size	Qty.*
White	**N2288.1 BL**	2CLA228810N1101	2M	10
Dune	**N2288.1 DN**	2CLA228810N6201	2M	10
Silver	**N2288.1 PL**	2CLA228810N1301	2M	10
Anthracite	**N2288.1 AN**	2CLA228810N1801	2M	10
Matt Black	**N2288.1 NT**	2CLA228810N1501	2M	10

Schuko socket outlet with duplex USB-C charger

Rated voltage: 250 Vac.
Rated current: 16A.
Type F: 2P + E.
Shuttered for child safety.
Screwless terminals.
USB-C charger:
- Output power (max.): 15 W.
- Output voltage USB-C: 5 Vdc (max. 3 A).
- Output voltage USB-C+C: 5 Vdc (total max. 3A).

Colour	Type	Order code	Size	Qty.*
White	**N2288.3 BL**	2CLA228830N1101	2M	1
Dune	**N2288.3 DN**	2CLA228830N6201	2M	1
Silver	**N2288.3 PL**	2CLA228830N1301	2M	1
Anthracite	**N2288.3 AN**	2CLA228830N1801	2M	1
Matt Black	**N2288.3 NT**	2CLA228830N1501	2M	1

French/Earth-pin socket outlet

Rated voltage: 250 Vac.
Rated current: 16A.
Type E: 2P + E.
Shuttered for child safety.
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2287 BL**	2CLA228700N1101	2M	10
Dune	**N2287 DN**	2CLA228700N6201	2M	10
Silver	**N2287 PL**	2CLA228700N1301	2M	10
Anthracite	**N2287 AN**	2CLA228700N1801	2M	10
Matt Black	**N2287 NT**	2CLA228700N1501	2M	10
Red	**N2287 RJ**	2CLA228700N7001	2M	10

French/Earth-pin socket outlet screwless

Rated voltage: 250 Vac.
Rated current: 16A.
Type E: 2P + E.
Shuttered for child safety.
Screwless terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2287.6 BL**	2CLA228760N1101	2M	10
Dune	**N2287.6 DN**	2CLA228760N6201	2M	10
Silver	**N2287.6 PL**	2CLA228760N1301	2M	10
Anthracite	**N2287.6 AN**	2CLA228760N1801	2M	10
Matt Black	**N2287.6 NT**	2CLA228760N1501	2M	10
Red	**N2287.6 RJ**	2CLA228760N7001	2M	10
Green	**N2287.6 VD**	2CLA228760N8001	2M	10

Zenit
Socket outlets

Italian / German socket outlet

Rated voltage: 250 Vac.
Rated current: 10 / 16A.
Type F+L: 2P + E / P30/17.
Shuttered for child safety.
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2233 BL**	2CLA223300N1101	2M	10
Dune	**N2233 DN**	2CLA223300N6201	2M	10
Silver	**N2233 PL**	2CLA223300N1301	2M	10
Anthracite	**N2233 AN**	2CLA223300N1801	2M	10
Matt Black	**N2233 NT**	2CLA223300N1501	2M	10
Red	**N2233 RJ**	2CLA223300N7001	2M	10

Italian 10/16A socket outlet

Rated voltage: 250 Vac.
Rated current: 10 / 16A.
Type L: 2P + E / P17/11.
Shuttered for child safety.
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2133 BL**	2CLA213300N1101	1M	20
Dune	**N2133 DN**	2CLA213300N6201	1M	20
Silver	**N2133 PL**	2CLA213300N1301	1M	20
Anthracite	**N2133 AN**	2CLA213300N1801	1M	20
Matt Black	**N2133 NT**	2CLA213300N1501	1M	20
Red	**N2133 RJ**	2CLA213300N7001	1M	20

Italian 10A socket outlet

Rated voltage: 250 Vac.
Rated current: 10A.
Type L: 2P + E / P11.
Shuttered for child safety.
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2133.1 BL**	2CLA213310N1101	1M	20
Dune	**N2133.1 DN**	2CLA213310N6201	1M	20
Silver	**N2133.1 PL**	2CLA213310N1301	1M	20
Anthracite	**N2133.1 AN**	2CLA213310N1801	1M	20
Matt Black	**N2133.1 NT**	2CLA213310N1501	1M	20
Red	**N2133.1 RJ**	2CLA213310N7001	1M	20

American earthed socket outlet

Rated voltage: 125 Vac.
Rated current: 15A.
Type B: 2P + E / NEMA 5-15R.
Shuttered for child safety.
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2128 BL**	2CLA212800N1101	1M	20
Dune	**N2128 DN**	2CLA212800N6201	1M	20
Silver	**N2128 PL**	2CLA212800N1301	1M	20
Anthracite	**N2128 AN**	2CLA212800N1801	1M	20
Matt Black	**N2128 NT**	2CLA212800N1501	1M	20

American earthed duplex socket outlet

Rated voltage: 125 Vac.
Rated current: 15A.
Type B: 2P + E / NEMA 5-15R.
Duplex outlet.
Shuttered for child safety.
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2328 BL**	2CLA232800N1101	3M	20
Dune	**N2328 DN**	2CLA232800N6201	3M	20
Silver	**N2328 PL**	2CLA232800N1301	3M	20
Anthracite	**N2328 AN**	2CLA232800N1801	3M	20
Matt Black	**N2328 NT**	2CLA232800N1501	3M	20

Euro-American unearthed socket outlet

Rated voltage: 125 / 250 Vac.
Rated current: 15 / 16A.
Type A+C: 2P / NEMA 1-15R (non-earthed).
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2135 BL**	2CLA213501N1101	1M	20
Dune	**N2135 DN**	2CLA213501N6201	1M	20
Silver	**N2135 PL**	2CLA213501N1301	1M	20
Anthracite	**N2135 AN**	2CLA213501N1801	1M	20
Matt Black	**N2135 NT**	2CLA213501N1501	1M	20

Zenit
Socket outlets

Euro-American earthed socket outlet

Rated voltage: 125 / 250 Vac.
Rated current: 15 / 16 A. Type B+C: 2P / NEMA 5-15R.
Shuttered for child safety.
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2138 BL**	2CLA213800N1101	1M	20
Dune	**N2138 DN**	2CLA213800N6201	1M	20
Silver	**N2138 PL**	2CLA213800N1301	1M	20
Anthracite	**N2138 AN**	2CLA213800N1801	1M	20
Matt Black	**N2138 NT**	2CLA213800N1501	1M	20

Euro-American earthed socket outlet

Rated voltage: 125 / 250 Vac.
Rated current: 15 / 16A.
Type B+C: 2P / NEMA 5-15R.
Shuttered for child safety.
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2238 BL**	2CLA223801N1101	2M	10
Dune	**N2238 DN**	2CLA223801N6201	2M	10
Silver	**N2238 PL**	2CLA223801N1301	2M	10
Anthracite	**N2238 AN**	2CLA223801N1801	2M	10
Matt Black	**N2238 NT**	2CLA223801N1501	2M	10

Euro-American duplex socket outlet



Rated voltage: 125 / 250 Vac.
Rated current: 15 / 16A. Type B+C: 2P / NEMA 5-15R.
Duplex outlet. Shuttered for child safety. Screw-nut terminals

Colour	Type	Order code	Size	Qty.*
White	**N2338 BL**	2CLA233800N1101	3M	10
Dune	**N2338 DN**	2CLA233800N6201	3M	10
Silver	**N2338 PL**	2CLA233800N1301	3M	10
Anthracite	**N2338 AN**	2CLA233800N1801	3M	10
Matt Black	**N2338 NT**	2CLA233800N1501	3M	10

Universal socket outlet

Rated voltage: 125 / 250 Vac.
Rated current: 13 / 16A. Multiple type: 2P + E.
Shuttered for child safety.
Screw plot type terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2239 BL**	2CLA223900N1101	2M	10
Dune	**N2239 DN**	2CLA223900N6201	2M	10
Silver	**N2239 PL**	2CLA223900N1301	2M	10
Anthracite	**N2239 AN**	2CLA223900N1801	2M	10
Matt Black	**N2239 NT**	2CLA223900N1501	2M	10

Brazilian 10A socket outlet

Rated voltage: 250 Vac.
Rated current: 10 A.
Type N: 2P + E.
Shuttered for child safety.
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2136 BL**	2CLA213600N1102	1M	20
Dune	**N2136 DN**	2CLA213600N6202	1M	20
Silver	**N2136 PL**	2CLA213600N1302	1M	20
Anthracite	**N2136 AN**	2CLA213600N1802	1M	20
Matt Black	**N2136 NT**	2CLA213600N1502	1M	20
Red	**N2136 RJ**	2CLA213600N7002	1M	20

Brazilian 20A socket outlet

Rated voltage: 250 Vac.
Rated current: 20 A. Type N: 2P + E.
Shuttered for child safety.
Screw-nut terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2136.2 BL**	2CLA213620N1102	1M	20
Dune	**N2136.2 DN**	2CLA213620N6202	1M	20
Silver	**N2136.2 PL**	2CLA213620N1302	1M	20
Anthracite	**N2136.2 AN**	2CLA213620N1802	1M	20
Matt Black	**N2136.2 NT**	2CLA213620N1502	1M	20
Red	**N2136.2 RJ**	2CLA213620N7002	1M	20

British type socket outlet

Rated voltage: 250 Vac. Rated current: 13A.
Type G: 2P + E. Without switch.
Shuttered for child safety.
Screw plot type terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2237 BL**	2CLA223700N1101	2M	10
Dune	**N2237 DN**	2CLA223700N6201	2M	10
Silver	**N2237 PL**	2CLA223700N1301	2M	10
Anthracite	**N2237 AN**	2CLA223700N1801	2M	10
Matt Black	**N2237 NT**	2CLA223700N1501	2M	10

Zenit

USB chargers

USB charger type-A+C 10,5W

Input: 100 - 240 Vac ±10 %; 50/60 Hz. Max. 0,25 A.
Output (maximum power: 10,5 W):
- USB-A: 5 Vdc (max. 2,1 A).
- USB-C: 5 Vdc (max. 2,1 A).
- USB-A+C: 5 Vdc (total max. 2,1 A).
MFi 2,1A, BC 1.2, DCP 5V/1,5A.
Stand-by power consumption: <= 70 mW.
Energy efficiency: > 83 %.

Colour	Type	Order code	Size	Qty.*
White	**N2185.3 BL**	2CLA218530N1101	1M	1
Dune	**N2185.3 DN**	2CLA218530N6201	1M	1
Silver	**N2185.3 PL**	2CLA218530N1301	1M	1
Anthracite	**N2185.3 AN**	2CLA218530N1801	1M	1
Matt Black	**N2185.3 NT**	2CLA218530N1501	1M	1
White	**N2285.3 BL**	2CLA228530N1101	2M	1
Dune	**N2285.3 DN**	2CLA228530N6201	2M	1
Silver	**N2285.3 PL**	2CLA228530N1301	2M	1
Anthracite	**N2285.3 AN**	2CLA228530N1801	2M	1
Matt Black	**N2285.3 NT**	2CLA228530N1501	2M	1

USB charger type-A+C 15W

Input: 100 - 240 Vac ±10 %; 50/60 Hz. Max. 0,35 A.
Output (maximum power: 15 W):
- USB-A: 5 Vdc (max. 2,4 A).
- USB-C: 5 Vdc (max. 3 A).
- USB-A+C: 5 Vdc (total max .3 A).
USB-C, DFP 5V/3A, MFi 2,4A, BC 1.2, DCP 5V/1,5A.
Stand-by power consumption: <= 70 mW.
Energy efficiency: > 86%.

Colour	Type	Order code	Size	Qty.*
White	**N2185.4 BL**	2CLA218540N1101	1M	1
Dune	**N2185.4 DN**	2CLA218540N6201	1M	1
Silver	**N2185.4 PL**	2CLA218540N1301	1M	1
Anthracite	**N2185.4 AN**	2CLA218540N1801	1M	1
Matt Black	**N2185.4 NT**	2CLA218540N1501	1M	1
White	**N2285.4 BL**	2CLA228540N1101	2M	1
Dune	**N2285.4 DN**	2CLA228540N6201	2M	1
Silver	**N2285.4 PL**	2CLA228540N1301	2M	1
Anthracite	**N2285.4 AN**	2CLA228540N1801	2M	1
Matt Black	**N2285.4 NT**	2CLA228540N1501	2M	1

USB charger type-C+C 30W Power Delivery

Input: 100 - 240V~ 10%; 50/60Hz.
Output voltage USB-C (C1 or C2):
- 5 Vdc: max. 3 A.
- 9 Vdc: max. 3 A.
- 12 Vdc: max. 2,5A.
- 15 Vdc: max. 2 A.
- 20 Vdc: max. 1,5 A.
Output voltage USB-C+C (C1 and C2):
- 5 Vdc: total max. 3 A.
PD 3.0. QC 4.0, QC 3.0, QC 2.0, MFi 2,4A, BC 1.2, DCP 5V/1,5A.
Power consumption in stand-by: <= 100 mW.
Energy efficiency: 85 %.

Colour	Type	Order code	Size	Qty.*
White	**N2285.5 BL**	2CLA228550N1101	2M	1
Dune	**N2285.5 DN**	2CLA228550N6201	2M	1
Silver	**N2285.5 PL**	2CLA228550N1301	2M	1
Anthracite	**N2285.5 AN**	2CLA228550N1801	2M	1
Matt Black	**N2285.5 NT**	2CLA228550N1501	2M	1

Zenit

Protection devices

Fuse holder

Rated voltage: 250 Vac.
Rated current: 16A.
Fuse type / dimension: glass tube / 6 x 24 mm.

Colour	Type	Order code	Size	Qty.*
White	**N2108 BL**	2CLA210800N1101	1M	20
Dune	**N2108 DN**	2CLA210800N6201	1M	20
Silver	**N2108 PL**	2CLA210800N1301	1M	20
Anthracite	**N2108 AN**	2CLA210800N1801	1M	20
Matt Black	**N2108 NT**	2CLA210800N1501	1M	20
White	**N2208 BL**	2CLA220800N1101	2M	10
Dune	**N2208 DN**	2CLA220800N6201	2M	10
Silver	**N2208 PL**	2CLA220800N1301	2M	10
Anthracite	**N2208 AN**	2CLA220800N1801	2M	10
Matt Black	**N2208 NT**	2CLA220800N1501	2M	10

Circuit breaker & RCD

Rated voltage: 120 - 230 Vac; 50/60 Hz.
Residual current (sensitivity - IΔn): 10 mA.
C type magneto-thermic protection.
A type residual current protection. Two pole (1P + N) with 1 protected pole.

Rated current: 10A. Braking capacity: 1.500 A.

Colour	Type	Order code	Size	Qty.*
White	**N2234.2 BL**	2CLA223420N1101	2M	1
Dune	**N2234.2 DN**	2CLA223420N6201	2M	1
Silver	**N2234.2 PL**	2CLA223420N1301	2M	1
Anthracite	**N2234. 2 AN**	2CLA223420N1801	2M	1
Matt Black	**N2234.2 NT**	2CLA223420N1501	2M	1

Rated current: 16A. Braking capacity: 1.500 A.

Colour	Type	Order code	Size	Qty.*
White	**N2234.3 BL**	2CLA223430N1101	2M	1
Dune	**N2234.3 DN**	2CLA223430N6201	2M	1
Silver	**N2234.3 PL**	2CLA223430N1301	2M	1
Anthracite	**N223.4 3 AN**	2CLA223430N1801	2M	1
Matt Black	**N2234.3 NT**	2CLA223430N1501	2M	1

Telephone outlet RJ12

RJ12 type connector.
6 contacts.
Suitable for 2, 4 or 6 contscts jack.
Screw terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2117.6 BL**	2CLA211760N1101	1M	20
Dune	**N2117.6 DN**	2CLA211760N6201	1M	20
Silver	**N2117.6 PL**	2CLA211760N1301	1M	20
Anthracite	**N2117.6 AN**	2CLA211760N1801	1M	20
Matt Black	**N2117.6 NT**	2CLA211760N1501	1M	20
White	**N2217.6 BL**	2CLA221760N1101	2M	10
Dune	**N2217.6 DN**	2CLA221760N6201	2M	10
Silver	**N2217.6 PL**	2CLA221760N1301	2M	10
Anthracite	**N2217.6 AN**	2CLA221760N1801	2M	10
Matt Black	**N2217.6 NT**	2CLA221760N1501	2M	10

Zenit

Telephone and data outlets

Cover plate for data outlet 1-gang

Cover plate for one 201X.X connector or housing codes: 2017.2, 2017.3, 2018.5, 2018.6, 2018 and 2018.8).
With label holder.
Without shutter.

Colour	Type	Order code	Size	Qty.*
White	**N2118.1 BL**	2CLA211810N1101	1M	10
Dune	**N2118.1 DN**	2CLA211810N6201	1M	10
Silver	**N2118.1 PL**	2CLA211810N1301	1M	10
Anthracite	**N2118.1 AN**	2CLA211810N1801	1M	10
Matt Black	**N2118.1 NT**	2CLA211810N1501	1M	10
White	**N2218.1 BL**	2CLA221810N1101	2M	10
Dune	**N2218.1 DN**	2CLA221810N6201	2M	10
Silver	**N2218.1 PL**	2CLA221810N1301	2M	10
Anthracite	**N2218.1 AN**	2CLA221810N1801	2M	10
Matt Black	**N2218.1 NT**	2CLA221810N1501	2M	10

Cover plate for data outlet 2-gangs

Cover plate for two 201X.X connectors and/or and housings (codes: 2017.2, 2017.3, 2018.5, 2018.6, 2018 and 2018.8).
With label holder.
Without shutter.

Colour	Type	Order code	Size	Qty.*
White	**N2218.2 BL**	2CLA221820N1101	2M	10
Dune	**N2218.2 DN**	2CLA221820N6201	2M	10
Silver	**N2218.2 PL**	2CLA221820N1301	2M	10
Anthracite	**N2218.2 AN**	2CLA221820N1801	2M	10
Matt Black	**N2218.2 NT**	2CLA221820N1501	2M	10

Housing for data outlets - Keystone type

Housing for connectors with multiple type clipping system:
- 2018: Keystone, 3M and AMP type.
- 2018.8: Systimax type.
To be installed with N2118.1, N2218.1 and N2218.2 cover plates.

Colour	Type	Order code	Size	Qty.*
–	**2018**	2CLA201800A1001	–	10
–	**2018.8**	2CLA201880A1001	–	10

Telephone outlet RJ12

RJ12 type connector.
6 contacts.
Suitable for 2 (6P2C), 4 (6P4C) or 6 (6P6C) RJ11 and RJ12 jacks. Screw terminals.
To be installed with N2118.1, N2218.1 and N2218.2 cover plates.

Colour	Type	Order code	Size	Qty.*
–	**2017.2**	2CLA201720A1001	–	10

Data outlet RJ45 Cat.5e UTP

RJ45 type connector.
Cat.5e UTP.
In compliance with ANSI/TIA/EIA 568B.2, ISO/IEC11801 & EN50173. Universal TIA/EIA 568A and 568B labeling. Housing: ABS UL-94-0.
Durability: 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4).
IDC: PC UL94V-0, Accept 22-26AWG solid wire.
Contact: RJ45 8P8C, 3~50 micro-inch gold plating over nickel plated on contact area.
Tool-less wiring. To be installed with N2118.1, N2218.1 and N2218.2 cover plates.

Colour	Type	Order code	Size	Qty.*
–	**2018.5**	2CLA201850A1001	–	10

Data outlet RJ45 Cat.6 UTP

RJ45 type connector.
Cat.6 UTP.
In compliance with ANSI/TIA/EIA 568B.2, ISO/IEC11801 & EN50173. Universal TIA/EIA 568A and 568B labeling. Housing: ABS UL-94-0.
Durability: 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4).
IDC: PC UL94V-0, Accept 22-26AWG solid wire.
Contact: RJ45 8P8C, 3~50 micro-inch gold plating over nickel plated on contact area.
Tool-less wiring. To be installed with N2118.1, N2218.1 and N2218.2 cover plates.

Colour	Type	Order code	Size	Qty.*
–	**2018.6**	2CLA201860A1001	–	10

Zenit
Data outlets

Cover plate for data outlet 1-gang

Cover plate for one data connector housing (refs.: 2016, 2016.1, 2016.2 and 2016.3).
With labeling area for stickers.
Without shutter.

Colour	Type	Order code	Size	Qty.*
White	**N2216.1 BL**	2CLA221610N1101	2M	10
Dune	**N2216.1 DN**	2CLA221610N6201	2M	10
Silver	**N2216.1 PL**	2CLA221610N1301	2M	10
Anthracite	**N2216.1 AN**	2CLA221610N1801	2M	10
Matt Black	**N2216.1 NT**	2CLA221610N1501	2M	10

Cover plate for data outlet 2-gang

Cover plate for two data connector housing (refs.: 2016, 2016.1, 2016.2 and 2016.3).
With labeling area for stickers.
Without shutter.

Colour	Type	Order code	Size	Qty.*
White	**N2216.2 BL**	2CLA221620N1101	2M	10
Dune	**N2216.2 DN**	2CLA221620N6201	2M	10
Silver	**N2216.2 PL**	2CLA221620N1301	2M	10
Anthracite	**N2216.2 AN**	2CLA221620N1801	2M	10
Matt Black	**N2216.2 NT**	2CLA221620N1501	2M	10

Cover plate for data outlet 1-gang

Cover plate for one data connector housing (refs.: 2016, 2016.1, 2016.2 and 2016.3).
With labeling area for stickers.
With shutter.

Colour	Type	Order code	Size	Qty.*
White	**N2216.3 BL**	2CLA221630N1101	2M	10
Dune	**N2216.3 DN**	2CLA221630N6201	2M	10
Silver	**N2216.3 PL**	2CLA221630N1301	2M	10
Anthracite	**N2216.3 AN**	2CLA221630N1801	2M	10
Matt Black	**N2216.3 NT**	2CLA221630N1501	2M	10

Cover plate for data outlet 2-gang

Cover plate for two data connector housing (refs.: 2016, 2016.1, 2016.2 and 2016.3).
With labeling area for stickers.
With shutters.

Colour	Type	Order code	Size	Qty.*
White	**N2216.4 BL**	2CLA221640N1101	2M	10
Dune	**N2216.4 DN**	2CLA221640N6201	2M	10
Silver	**N2216.4 PL**	2CLA221640N1301	2M	10
Anthracite	**N2216.4 AN**	2CLA221640N1801	2M	10
Matt Black	**N2216.4 NT**	2CLA221640N1501	2M	10

Cover plate for data outlet 1-gang at 45º

Cover plate at 45º for one data connector housing (refs.: 2016, 2016.1, 2016.2 and 2016.3).
With labeling area for stickers.
Without shutter.

Colour	Type	Order code	Size	Qty.*
White	**N2216.5 BL**	2CLA221650N1101	2M	5
Dune	**N2216.5 DN**	2CLA221650N6201	2M	5
Silver	**N2216.5 PL**	2CLA221650N1301	2M	5
Anthracite	**N2216.5 AN**	2CLA221650N1801	2M	5
Matt Black	**N2216.5 NT**	2CLA221650N1501	2M	5

Cover plate for data outlet 2-gang at 45º - 2M

Cover plate at 45º for two data connector housing (refs.: 2016, 2016.1, 2016.2 and 2016.3).
With labeling area for stickers.
Without shutters.

Colour	Type	Order code	Size	Qty.*
White	**N2216.6 BL**	2CLA221660N1101	2M	5
Dune	**N2216.6 DN**	2CLA221660N6201	2M	5
Silver	**N2216.6 PL**	2CLA221660N1301	2M	5
Anthracite	**N2216.6 AN**	2CLA221660N1801	2M	5
Matt Black	**N2216.6 NT**	2CLA221660N1501	2M	5

Cover plate for data outlet 1-gang at 45º - 2M

Cover plate at 45º for one data connector housing (refs.: 2016, 2016.1, 2016.2 and 2016.3).
With labeling area for stickers.
With shutter.

Colour	Type	Order code	Size	Qty.*
White	**N2216.7 BL**	2CLA221670N1101	2M	5
Dune	**N2216.7 DN**	2CLA221670N6201	2M	5
Silver	**N2216.7 PL**	2CLA221670N1301	2M	5
Anthracite	**N2216.7 AN**	2CLA221670N1801	2M	5
Matt Black	**N2216.7 NT**	2CLA221670N1501	2M	5

Cover plate for data outlet 2-gang at 45º - 2M

Cover plate at 45º for two data connector housing (refs.: 2016, 2016.1, 2016.2 and 2016.3).
With labeling area for stickers.
With shutters.

Colour	Type	Order code	Size	Qty.*
White	**N2216.8 BL**	2CLA221680N1101	2M	5
Dune	**N2216.8 DN**	2CLA221680N6201	2M	5
Silver	**N2216.8 PL**	2CLA221680N1301	2M	5
Anthracite	**N2216.8 AN**	2CLA221680N1801	2M	5
Matt Black	**N2216.8 NT**	2CLA221680N1501	2M	5

Zenit
Data outlets

Housing for data outlets 1-gang

Housing for RJ45 data connectors with multiple type clipping systems:
- 2016: Keystone, 3M and AMP type.
- 2016.1: Systimax type.
- 2016.2: Panduit type.
- 2016.3: R&M type.

To be installed with N2216.1, N2216.2, N2216.3, N2216.4, N2216.5, N2216.6, N2216.7 and N2216.8 cover plates.

Colour	Type	Order code	Size	Qty.*
–	**2016**	2CLA201600A1001	–	10
–	**2016.1**	2CLA201610A1001	–	10
–	**2016.2**	2CLA201620A1001	–	10
–	**2016.3**	2CLA201630A1001	–	10

Data outlet RJ45 Cat.5e UTP

RJ45 type connector. Cat.5e UTP. Toolless wiring.
In compliance with ANSI/TIA/EIA 568B.2, ISO/IEC1 1 801 & EN50173.
Universal TIA/EIA 568A and 568B labeling.
Housing: ABS UL-94-0.
Durability: 750 cycles min. (ISO/IEC11801, IEC60603-7-4). IDC: PC UL94V-0,
Accept 22-26AWG solid wire.
Contact: RJ45 8P8C, 3~50 micro-inch gold plating over nickel plated on contact area.
Cover plate code: N2216.1, N2216.2, N2216.3, N2216.4, N2216.5, N2216.6, N2216.7 and N2216.8.

Colour	Type	Order code	Size	Qty.*
–	**2016.50**	2CLA201650N1001	–	10

Data outlet RJ45 Cat.6 UTP

RJ45 type connector. Cat.6 UTP. Toolless wiring.
In compliance with ANSI/TIA/EIA 568B.2, ISO/IEC1 1 801 & EN50173.
Universal TIA/EIA 568A and 568B labeling
Housing: ABS UL-94-0. Durability: 750 cycles min. (ISO/IEC11801 , IEC 60603-7-4). IDC: PC UL94V-0,
Accept 22- 26AWG solid wire.
Contact: RJ45 8P8C, 3~50 micro-inch gold plating over nickel plated on contact area.
Cover plate code: N2216.1, N2216.2, N2216.3, N2216.4, N2216.5, N2216.6, N2216.7 a nd N2216.8.

Colour	Type	Order code	Size	Qty.*
–	**2016.60**	2CLA201660N1001	–	10

Data outlet RJ45 Cat.6A STP

RJ45 type connector. Cat.6A STP. Toolless wiring.
T568A & T568B wiring sticker.
1 0Gb/S. Transmission performance is in compliance with the ANAI/TIA/EIA 568 B.2 standard
Insertion force: 20N max. (IEC60603-7-4).
Retention Strength: 7.7kg between jack and plug.
Insertion life: minimum 750 cycles (ISO/IEC 1 1 801, IEC 60603-7-4)
Housing: Zinc die-casting design for optimal EMI protection
IDC: PC UL94V-0.
Accept 22-26AWG solid wire.
Contact: RJ45 8P8C, 3~50 microinch gold plating over nickel plated on contact area.
Cover plate code: N2216.1, N2216.2, N2216.3, N2216.4, N2216.5, N2216.6, N2216.7 and N2216.8.

Colour	Type	Order code	Size	Qty.*
–	**2016.65**	2CLA201665N1001	–	10

Data outlet Fiber Optic SC adapter

Optical fiber SC simplex connector
Insertion Loss (IL) <=0.3dB for SM and MM.
Durability(500 Mating): 0.2dB max. increase.
Withdrawal force (g/f): 100300.
Operating temperature: -40° C to +85° C.
Meet JIS C5974 and Bellcore GR-326 standard.
Compliant with IEC874-14 & IEC874-19.
All parts compliant with ROHS.
Cover plate code: N2216.1, N2216.2, N2216.3, N2216.4, N2216.5, N2216.6, N2216.7 and N2216.8.

Colour	Type	Order code	Size	Qty.*
–	**2016.9**	2CLA201690N1001	–	10

Zenit

TV socket outlets

TV terminal outlet M-type

Single TV outlet - Dead-end.
M type - 9,52 mm. male.
For 75 Ω impedance coaxial cable.
Frequency range: 5 - 862 Mhz.
Output loss: 0,5 dB.

Colour	Type	Order code	Size	Qty.*
White	**N2150.7 BL**	2CLA215070N1101	1M	10
Dune	**N2150.7 DN**	2CLA215070N6201	1M	10
Silver	**N2150.7 PL**	2CLA215070N1301	1M	10
Anthracite	**N2150.7 AN**	2CLA215070N1801	1M	10
Matt Black	**N2150.7 NT**	2CLA215070N1501	1M	10
White	**N2250.7 BL**	2CLA225070N1101	2M	10
Dune	**N2250.7 DN**	2CLA225070N6201	2M	10
Silver	**N2250.7 PL**	2CLA225070N1301	2M	10
Anthracite	**N2250.7 AN**	2CLA225070N1801	2M	10
Matt Black	**N2250.7 NT**	2CLA225070N1501	2M	10

TV loop-through outlet M-type

Single TV outlet - Intermediate.
M type - 9,52 mm. male.
For 75 Ω impedance coaxial cable.
Frequency range: 5 - 862 Mhz.
Output loss: 11 dB.
Through loss: 1,7 dB.

Colour	Type	Order code	Size	Qty.*
White	**N2150.8 BL**	2CLA215080N1101	1M	10
Dune	**N2150.8 DN**	2CLA215080N6201	1M	10
Silver	**N2150.8 PL**	2CLA215080N1301	1M	10
Anthracite	**N2150.8 AN**	2CLA215080N1801	1M	10
Matt Black	**N2150.8 NT**	2CLA215080N1501	1M	10

TV/SAT terminal outlet

Single TV outlet - dead-end.
- TV: M type - 9,52 mm. male.
- SAT: F type - female.
For 75 Ω impedance coaxial cable.
Frequency range (TV / SAT): 5 - 862 Mhz / 950 - 2.400 MHz.
Output loss (TV / SAT): 1 dB / 1 dB.
DC path (Vdc / mA / Tono): 34 max. / 500 max. / 22kHz - DiSEqC.

Colour	Type	Order code	Size	Qty.*
White	**N2151.7 BL**	2CLA215170N1101	1M	10
Dune	**N2151.7 DN**	2CLA215170N6201	1M	10
Silver	**N2151.7 PL**	2CLA215170N1301	1M	10
Anthracite	**N2151.7 AN**	2CLA215170N1801	1M	10
Matt Black	**N2151.7 NT**	2CLA215170N1501	1M	10

TV terminal outlet F-type - 1M

Single TV outlet.
F type - female.
For 75 Ω impedance coaxial cable.
Frequency range: 0 - 2.000 Mhz.
Working voltage: 250 VRMS max.
Dielectric withstanding voltage: 500 VRMS min.

Colour	Type	Order code	Size	Qty.*
White	**N2150 BL**	2CLA215000N1101	1M	10
Dune	**N2150 DN**	2CLA215000N6201	1M	10
Silver	**N2150 PL**	2CLA215000N1301	1M	10
Anthracite	**N2150 AN**	2CLA215000N1801	1M	10
Matt Black	**N2150 NT**	2CLA215000N1501	1M	10

Zenit

TV socket outlets

TV-R/SAT terminal outlet

Installation as a terminal outlet connected to a tap-off or splitter (without terminal resistor).
Connection: screw terminal and clamp.
Output connectors (C1 / C2): IEC male 9,52mm diam. / IEC female 9,52mm diam.
Frequency range (I/O / C1 / C2):
5 - 2.400 MHz / 5 - 862 MHz / 930 - 2.400 MHz.
Basic loss (FM / TV / SAT):
0,2±0,1 dB / 1,0 ±0,5 dB / 1,2±0,6 dB.
Isolation (FM / TV / SAT): >45 / >14 / >14.
Selectivity (TV-R / SAT): >15 / >15.
Return loss (VR / FM / TV / SAT): >25 / >25 / >14 / >10.
DC path (Vdc / mA / Tono):
24 max. / 500 max. / 22 KHz - DiSEqC.

Colour	Type	Order code	Size	Qty.*
White	**N2251.3 BL**	2CLA225130N1101	2M	10
Dune	**N2251.3 DN**	2CLA225130N6201	2M	10
Silver	**N2251.3 PL**	2CLA225130N1301	2M	10
Anthracite	**N2251.3 AN**	2CLA225130N1801	2M	10
Matt Black	**N2251.3 NT**	2CLA225130N1501	2M	10

TV-R/SAT final outlet

Installation as a terminal outlet connected to a series with loop-through outlets.
Connection: screw terminal and clamp.
Output connectors (C1 / C2):
IEC male 9,52mm diam. / IEC female 9,52 mm. diam.
Frequency range (I/O / C1 / C2):
5 - 2.400 MHz / 5 - 2.400 MHz / 5 - 2.400 MHz.
Basic loss (FM / TV / SAT):
3,7±0,3 dB / 4,0±0,5 dB / 5,0±1,2 dB.
Isolation (FM / TV / SAT): >20 / >20 / >14.
Return loss (VR / FM / TV / SAT): >16 / >16 / >16 / >9.
DC path (Vdc / mA / Tono):
24 max. / 500 max. / 22 KHz - DiSEqC.

Colour	Type	Order code	Size	Qty.*
White	**N2251.7 BL**	2CLA225170N1101	2M	10
Dune	**N2251.7 DN**	2CLA225170N6201	2M	10
Silver	**N2251.7 PL**	2CLA225170N1301	2M	10
Anthracite	**N2251.7 AN**	2CLA225170N1801	2M	10
Matt Black	**N2251.7 NT**	2CLA225170N1501	2M	10

TV-R/SAT loop-through outlet

Installation as an intermediate outlet in series connected to each other.
Output connectors (C1 / C2):
IEC male 9,52 mm. diam. / IEC female 9,52 mm. diam.
Frequency range (I/O / C1 / C2):
5 - 2.400 MHz / 5 - 2.400 MHz / 5 - 2.400 MHz.
Basic loss (FM / TV / SAT):
10,0±1,0 dB / 10,0±1,0 dB / 12,0±2,0 dB.
Through loss (FM / TV / SAT):
2,5±0,5 / 2,5±0,7 / 3,0±1,0.
Directivity (FM / TV / SAT): >20 / >12 / >5.
Isolation (FM / TV / SAT): >45 / >30 / >28.
Return loss (VR / FM / TV / SAT):
>13 / >13 / >12 / >12. DC
path (Vdc / mA / Tono):
24 max. / 500 max. / 22 KHz - DiSEqC.

Colour	Type	Order code	Size	Qty.*
White	**N2251.8 BL**	2CLA225180N1101	2M	10
Dune	**N2251.8 DN**	2CLA225180N6201	2M	10
Silver	**N2251.8 PL**	2CLA225180N1301	2M	10
Anthracite	**N2251.8 AN**	2CLA225180N1801	2M	10
Matt Black	**N2251.8 NT**	2CLA225180N1501	2M	10

Zenit
VDI outlets

2x RCA connection unit

Front: 2x RCA connectors (Red / White).
Rear: screw terminals (4 wires).

Colour	Type	Order code	Size	Qty.*
White	**N2155.2 BL**	2CLA215520N1101	1M	1
Dune	**N2155.2 DN**	2CLA215520N6201	1M	1
Silver	**N2155.2 PL**	2CLA215520N1301	1M	1
Anthracite	**N2155.2 AN**	2CLA215520N1801	1M	1
Matt Black	**N2155.2 NT**	2CLA215520N1501	1M	1

3x RCA connection unit

Front: 3x RCA connectors (Red / White / Yellow).
Rear: screw terminals (6 wires).

Colour	Type	Order code	Size	Qty.*
White	**N2155.3 BL**	2CLA215530N1101	1M	1
Dune	**N2155.3 DN**	2CLA215530N6201	1M	1
Silver	**N2155.3 PL**	2CLA215530N1301	1M	1
Anthracite	**N2155.3 AN**	2CLA215530N1801	1M	1
Matt Black	**N2155.3 NT**	2CLA215530N1501	1M	1

HDMI female-female connection unit with cable

Front: 1x HDMI connector (Type A connector).
Rear: 1x HDMI connector (Type A connector) with 20 cm cable extension.

Colour	Type	Order code	Size	Qty.*
White	**N2155.71 BL**	2CLA215571N1101	1M	1
Dune	**N2155.71 DN**	2CLA215571N6201	1M	1
Silver	**N2155.71 PL**	2CLA215571N1301	1M	1
Anthracite	**N2155.71 AN**	2CLA215571N1801	1M	1
Matt Black	**N2155.71 NT**	2CLA215571N1501	1M	1

Speaker connection unit

Front: XLR female.
Rear: 3x screw terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2255.1 BL**	2CLA225510N1101	1M	1
Dune	**N2255.1 DN**	2CLA225510N6201	1M	1
Silver	**N2255.1 PL**	2CLA225510N1301	1M	1
Anthracite	**N2255.1 AN**	2CLA225510N1801	1M	1
Matt Black	**N2255.1 NT**	2CLA225510N1501	1M	1

Mini-Jack connection unit

Front: 1x Mini-Jack connector (3,5 mm. stereo audio jack).
Rear: screw terminals (3/4 wires).

Colour	Type	Order code	Size	Qty.*
White	**N2155.4 BL**	2CLA215540N1101	1M	1
Dune	**N2155.4 DN**	2CLA215540N6201	1M	1
Silver	**N2155.4 PL**	2CLA215540N1301	1M	1
Anthracite	**N2155.4 AN**	2CLA215540N1801	1M	1
Matt Black	**N2155.4 NT**	2CLA215540N1501	1M	1

VGA connection unit

Front: 1x VGA connector (DE-15 connector).
Rear: screw terminals (15 wires).

Colour	Type	Order code	Size	Qty.*
White	**N2155.5 BL**	2CLA215550N1101	1M	1
Dune	**N2155.5 DN**	2CLA215550N6201	1M	1
Silver	**N2155.5 PL**	2CLA215550N1301	1M	1
Anthracite	**N2155.5 AN**	2CLA215550N1801	1M	1
Matt Black	**N2155.5 NT**	2CLA215550N1501	1M	1

USB female-female connection unit with cable

Front: 1x USB 2.0 connector (Type A connector).
Rear: 1x USB 2.0 connector (Type A connector) with 20 cm cable extension.

Colour	Type	Order code	Size	Qty.*
White	**N2155.91 BL**	2CLA215591N1101	1M	1
Dune	**N2155.91 DN**	2CLA215591N6201	1M	1
Silver	**N2155.91 PL**	2CLA215591N1301	1M	1
Anthracite	**N2155.91 AN**	2CLA215591N1801	1M	1
Matt Black	**N2155.91 NT**	2CLA215591N1501	1M	1

Speaker connection unit

Front: 2x spring speaker terminals (Red/Black).
Rear: 2x screw terminals.

Colour	Type	Order code	Size	Qty.*
White	**N2257.1 BL**	2CLA225710N1101	1M	1
Dune	**N2257.1 DN**	2CLA225710N6201	1M	1
Silver	**N2257.1 PL**	2CLA225710N1301	1M	1
Anthracite	**N2257.1 AN**	2CLA225710N1801	1M	1
Matt Black	**N2257.1 NT**	2CLA225710N1501	1M	1

Zenit

Multimedia modules

Bluetooth sound module

Rated voltage: 110-230 Vac ± 15%; 50-60 Hz
Max. consumption: 7W
Stand-by consumption: 0,2W
Amplifier power: 2+2 W; <1% distortion (16 Ω)
Speaker impedance: 16 Ω (2+2 W audio)
Audio inputs:
- Bluetooth: stereo Bluetooth® 4 version receiver with A2DP-SINK profile and memory for 8 links.
- Front input (AUX): 1x mini-jack stereo 3,5 mm.
- Rear input (TV): screw type terminal with 3 contacts (stereo).
Cover plate code: N2268.4

Colour	Type	Order code	Size	Qty.*
-	**9368.4**	2CLA936840A1001	2M	1

Cover plate for Bluetooth sound module

Cover plate for Bluetooth sound module code: 9368.4.

Colour	Type	Order code	Size	Qty.*
White	**N2268.4 BL**	2CLA226840N1101	2M	1
Dune	**N2268.4 DN**	2CLA226840N6201	2M	1
Silver	**N2268.4 PL**	2CLA226840N1301	2M	1
Anthracite	**N2268.4 AN**	2CLA226840N1801	2M	1
Matt Black	**N2268.4 NT**	2CLA226840N1501	2M	1

Multimedia module

Rated voltage: 127-230 Vac ± 15%; 50-60 Hz
Max. consumption: 200 mA
Stand-by consumption: 0,3 W
Audio input: Bluetooth 1 mini-jack stereo input
Audio output: L-R audio (not amplified)
Speaker impedance: 4 Ω (2+2 W)
HDMI connector male (front) male (rear)
USB Charger: Max output: 5W (5V - 1A)
Cover plate code: N2268.6

Colour	Type	Order code	Size	Qty.*
-	**9368.6**	2CLA936860A1001	2M	1

Cover plate for multimedia module

Cover plate for multimedia module code: 9368.6.

Colour	Type	Order code	Size	Qty.*
White	**N2268.6 BL**	2CLA226860N1101	2M	1
Dune	**N2268.6 DN**	2CLA226860N6201	2M	1
Silver	**N2268.6 PL**	2CLA226860N1301	2M	1
Anthracite	**N2268.6 AN**	2CLA226860N1801	2M	1
Matt Black	**N2268.6 NT**	2CLA226860N1501	2M	1

Loudspeakers

HiFi built-in ceiling loudspeaker - 5”

2-way system. For mounting in hollow walls/ceilings. With spring brackets.
In corrosion-resistant metal design.
With integrated loudspeaker grid.
Nominal power: 30 W. Frequency response: 50 - 20.000 Hz
Impedance: 8 Ohm. Drilling measurements: 165 mm.
Mounting depth: 72 mm.

Colour	Type	Order code	Size	Qty.*
-	**8226/10 EB**	2CKA008200A0202	-	1

Built-in ceiling loudspeaker - 5”

With broadband characteristics.
For mounting in hollow walls ceilings. With spring brackets. In corrosion-resistant metal design.
With integrated loudspeaker grid.
Nominal power: 30 W. Frequency response: 50 - 20.000 Hz. Impedance: 8 Ohm.
Drilling measurements: 165 mm
Mounting depth: 72 mm

Colour	Type	Order code	Size	Qty.*
-	**8226 EB**	2CKA008200A0201	-	1

Built-in ceiling loudspeaker - 3”

For mounting in hollow walls/ceilings. With spring brackets. In corrosion-resistant metal design.
With integrated loudspeaker grid.
Nominal power: 10 W. Frequency response: 90 - 20.000 Hz. Impedance: 8 Ohm Drilling measurements: 90 mm
Mounting depth: 38 mm

Colour	Type	Order code	Size	Qty.*
-	**8225 EB**	2CKA008200A0200	-	1

Zenit - ABB-free@home

Sensors

Sensor unit 1-gang

For sending switching, dimming and blind commands to an ABB-free@home® actuator.
To be used with ABB-free home® 2 fold push buttons.
Control element: Switch contacts top/ bottom.
Display elements: LED as light for orientation or display of switching state.
Protection class of device: IP 20.
Mounting depth: 14,1 mm.
To be installed with SR-2-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SU-F-1.0.PB.1**	2CKA006220A0222	2M	1

Sensor unit 2-gang

For sending switching, dimming and blind commands. to an ABB-free@home® actuator.
To be used with ABB-free home® 4 fold push buttons.
Control element: Switch contacts top/ bottom.
Display elements: LED as light for orientation or display of switching state.
Protection class of device: IP 20.
Mounting depth: 14,1 mm.
To be installed with SR-4-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SU-F-2.0.PB.1**	2CKA006220A0223	2M	1

Sensor & switch actuators

Sensor/Switch actuator 1/1-gang

For switching 127/230 V~ devices. With 1 integrated switch actuator. Switching function is available pre-configured.
Use with ABB-free@home® 2 fold push buttons.
Outputs: 1× normally open contact, potential free.
Suitable for: resistive. Rated current: 10 A.
Rated power: 2300 W. Suitable for: capacitive.
Rated current: 10 AX. Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-2-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SSA-F-1.1.PB.1**	2CKA006220A0232	2M	1

Sensor/Switch actuator 2/1-gang

For switching 127/230 V~ devices. With 1 integrated switch actuator.
Switching function is available pre-configured.
Use with ABB-free@home® 4 fold push buttons.
Outputs: 1× normally open contact, potential free.
Suitable for: resistive. Rated current: 10 A.
Rated power: 2300 W. Suitable for: capacitive.
Rated current: 10 AX. Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-4-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SSA-F-2.1.PB.1**	2CKA006220A0233	2M	1

Sensor & switch actuators

Sensor/Switch actuator 2/2-gang

For switching 127/230 V~ devices. With 1 integrated switch actuator. Switching function is available preconfigured. Use with ABB-free@home® 4 fold push buttons.
Outputs: 2× normally open contact, potential free.
Suitable for: resistive. Rated current: 10 A.
Rated power: 2 x 1200 W. Suitable for: capacitive.
Rated current: 10 AX. Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-4-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SSA-F-2.2.PB.1**	2CKA006220A0234	2M	1

Sensor & dimmer actuators

Sensor/Dimmer actuator 1/1-gang

For dimming 127/230 V~ loads.
With integrated universal dimming.
Actuator for controlling different lamps. The dimming function.
Is available pre-configured. Use with ABB-free@home® 2 fold.
Push buttons.
Outputs: 1× dimming channel.
Suitable for: 230 V incandescent lamps and low-voltage.
Halogen lamps with conventional transformers or electronic.
Transformers.
Rated power: 10–180 W/VA.
Suitable for: LEDi and energy-saving bulbs.
Rated power: 2–80 W/VA.
Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-2-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SDA-F-1.1.PB.1**	2CKA006220A0235	2M	1

Sensor/Dimmer actuator 2/1-gang

FFor dimming 230 V~ loads. With integrated universal dimming actuator for controlling different lamps. The dimming function is available pre-configured. Use with ABB-free@home® 4 fold push buttons.
Outputs: 1× dimming channel.
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformers.
Rated power: 10–180 W/VA.
Suitable for: LEDi and energy-saving bulbs.
Rated power: 2–80 W/VA.
Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-4-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SDA-F-2.1.PB.1**	2CKA006220A0236	2M	1

Zenit - ABB-free@home

Sensor & blind actuators

Sensor/Blind actuator 1/1-gang

For controlling blind and awning motors.
With integrated blind actuator. Blind function is available pre-configured.
To be used with ABB-free home® 2 fold push buttons.
Outputs: 1× Change-over contacts/normally open contact, potential-bound. Rated power: 920 VA.
Rated current: 4 A. Suitable for: Operating mode blind. Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-2-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SBA-F-1.1.PB.1**	2CKA006220A0237	2M	1

Sensor/Blind actuator 2/1-gang

For controlling blind and awning motors.
With integrated blind actuator. Blind function is available pre-configured.
To be used with ABB-free home® 4 fold push buttons.
Outputs: 1× Change-over contacts/normally open contact, potential-bound.
Rated power: 920 VA.
Rated current: 4 A.
Suitable for: Operating mode blind.
Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-4-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SBA-F-2.1.PB.1**	2CKA006220A0238	2M	1

Room temperature controller

Room temperature controller

Room temperature control function for controlling commercially available valve drives or analogue valve drives (continuous controllers).
With display of set-value temperature.
Only to be used with ABB-free@home® Zenit cover plates for room thermostat.
Display elements: LCD Display showing operation modes.
Protection class of device: IP 20.
Mounting depth: 17,9 mm.
To be installed with CP-RTC-N2 or CP-RTC-FC-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**RTC-F-1.PB**	2CKA006220A0276	2M	1

Motion sensor & actuators

Motion sensor

With select lens for detection with animal access. For automatic switching of ABB-free@home® actuators dependent on movement and brightness. To be used with ABB-free@home® Zenit cover plates for movement detector.
Detection range: frontal 6 m, lateral 3 m.
Detection angle: 180°.
Brightness limit value: 1 – 500 lux.
Protection class of device: IP 20.
Mounting depth: 14.1 mm.
To be installed with CP-MD-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SBA-F-1.1.PB.1**	2CKA006220A0237	2M	1

Motion sensor/actuator

With select lens for detection with animal access.
Including an integrated actuator for switching 230 V~ devices. To be used with ABB-free@home® Zenit cover plates for movement detector.
Outputs: 1× normally open contact, potential free.
Suitable for: resistive.
Rated current: 10 A.
Rated power: 2300 W.
Suitable for: capacitive.
Rated current: 10 AX.
Detection range: frontal 6 m, lateral 3 m.
Detection angle: 180°.
Brightness limit value: 1 – 500 lux.
Protection class of device: IP 20.
Mounting depth: 31.5 mm.
To be installed with CP-MD-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**MSA-F.1.1.PB.1**	2CKA006220A0231	2M	1

Zenit - ABB-free@home

Sensors - Wireless

Wireless sensor unit 1-gang

Wireless communication with the system.
For sending switching, dimming and blind commands to an ABB-free@home® actuator. To be used with ABB-free@home® 2 fold push buttons.
Control element: Switch contacts top/ bottom.
Display elements: LED as light for orientation or display. of switching state.
Protection class of device: IP 20.
Mounting depth: 14,1 mm.
To be installed with SR-2-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SU-F-1.0.PB.1-WL**	2CKA006200A0106	2M	1

Wireless sensor unit 2-gang

Wireless communication with the system.
For sending switching, dimming and blind commands to an ABB-free@home® actuator. To be used with ABB-free@home® 4 fold push buttons.
Control element: Switch contacts top/ bottom.
Display elements: LED as light for orientation or display. of switching state.
Protection class of device: IP 20.
Mounting depth: 14,1 mm.
To be installed with SR-4-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SU-F-2.0.PB.1-WL**	2CKA006200A0107	2M	1

Sensors & switch actuators - Wireless

Wireless sensor/ Switch actuator 1/1-gang

Wireless communication with the system.
For switching 230 V~ devices. With 1 integrated switch actuator. Switching function is available pre-configured.
Use with ABB-free@home® 2 fold push buttons.
Outputs: 1× normally open contact, potential free.
Suitable for: resistive. Rated current: 10 A.
Rated power: 2300 W. Suitable for: capacitive.
Rated current: 10 AX. Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-2-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SSA-F-1.1.PB.1**	2CKA006220A0232	2M	1

Wireless sensor/ Switch actuator 2/1-gang

Wireless communication with the system.
For switching 230 V~ devices. With 1 integrated switch actuator. Switching function is available pre-configured.
Use with ABB-free@home® 4 fold push buttons.
Outputs: 1× normally open contact, potential free.
Suitable for: resistive. Rated current: 10 A.
Rated power: 2300 W. Suitable for: capacitive.
Rated current: 10 AX. Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-4-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SSA-F-2.1.PB.1-WL**	2CKA006200A0109	2M	1

Wireless sensor/ Switch actuator 2/2-gang

Wireless communication with the system.
For switching 230 V~ devices. With 1 integrated switch actuator. Switching function is available preconfigured.
Use with ABB-free@home® 4 fold push buttons.
Outputs: 2× normally open contact, potential free.
Suitable for: resistive. Rated current: 10 A.
Rated power: 2 x 1200 W. Suitable for: capacitive.
Rated current: 10 AX. Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-4-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SSA-F-2.2.PB.1-WL**	2CKA006200A0110	2M	1

Sensors & dimmer actuators - Wireless

Wireless sensor/ Dimmer actuator 1/1-gang

Wireless communication with the system.
For dimming 230 V~ loads. With integrated universal dimming. Actuator for controlling different lamps. The dimming function.
Is available pre-configured. Use with ABB-free@home® 2 fold. Push buttons.
Outputs: 1× dimming channel.
Suitable for: 230 V incandescent lamps and low-voltage.
Halogen lamps with conventional transformers or electronic. Transformers. Rated power: 10–180 W/VA.
Suitable for: LEDi and energy-saving bulbs.
Rated power: 2–80 W/VA. Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-2-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SDA-F-1.1.PB.1-WL**	2CKA006200A0111	2M	1

Wireless sensor/ Dimmer actuator 2/1-gang

Wireless communication with the system.
For dimming 230 V~ loads. With integrated universal dimming actuator for controlling different lamps. The dimming function is available pre-configured.
Use with ABB-free@home® 4 fold push buttons.
Outputs: 1× dimming channel.
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformers.
Rated power: 10–180 W/VA.
Suitable for: LEDi and energy-saving bulbs.
Rated power: 2–80 W/VA. Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-4-N2 cover plates.Mounting depth: 31,5 mm.
To be installed with SR-2-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SDA-F-2.1.PB.1-WL**	2CKA006200A0112	2M	1

Zenit - ABB-free@home

Sensors & blind actuators - Wireless

Wireless sensor/ Blind actuator 1/1-gang

Wireless communication with the system.
For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured. To be used with ABB-free@home® 2 fold push buttons.
Outputs: 1× Change-over contacts/normally open contact, potential-bound.
Rated power: 920 VA.
Rated current: 4 A.
Suitable for: Operating mode blind.
Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-2-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SBA-F-1.1.PB.1-WL**	2CKA006200A0113	2M	1

Wireless sensor/ Blind actuator 2/1-gang

Wireless communication with the system.
For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured.
To be used with ABB-free@home® 4 fold push buttons.
Outputs: 1× Change-over contacts/normally open contact, potential-bound.
Rated power: 920 VA.
Rated current: 4 A.
Suitable for: Operating mode blind.
Protection class of device: IP 20.
Mounting depth: 31,5 mm.
To be installed with SR-4-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**SBA-F-2.1.PB.1-WL**	2CKA006200A0114	2M	1

Room temperature controllers - Wireless

Wireless room temperature controller

Wireless communication with the system.
Room temperature control function for controlling commercially available valve drives or analogue valve drives (continuous controllers).
With display of set-value temperature.
Display elements: LCD Display showing operation modes.
Mounting depth: 17,9 mm. To be installed with CP-RTC-N2 or CP-RTC-FC-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**RTC-F-1.PB-WL**	2CKA006200A0115	2M	1

Wireless RTC / Heating actuator

Wireless communication with the system.
Heating/cooling operation.
Control element with room temperature controller function. With display of set-value temperature.
With integrated switch actuator, e.g. for controlling thermoelectric actuating drives in heating/cooling systems or electric floor heating systems.
RTC function is available also without prior programming (pre-configured). 3 wire connection (neutral conductor required). Control element: Floating rocker for the selection of set values and operating modes
Display elements: LCD showing operation modes
Rated voltage: 230 V~ / 50-60 Hz
Outputs: 1 Normally open contact, potential-bound
Suitable for: ohmic. Rated current: 16 A
Output voltage: 230 V~. Rated power: 3680 W
Mounting depth: 32 mm.
To be installed with CP-RTC-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**RTC-F-2.1-1.PB-WL**	2CKA006200A0116	2M	1

Motion sensor & actuator - Wireless

Wireless motion sensor/ actuator

Wireless communication with the system.
With select lens for detection with animal access.
Including an integrated actuator for switching 230 V~ devices. To be used with ABB-free@home® Zenit cover plates for movement detector.
Outputs: 1× normally open contact, potential free.
Suitable for: resistive.
Rated current: 10 A.
Rated power: 2300 W.
Suitable for: capacitive.
Rated current: 10 AX.
Detection range: frontal 6 m, lateral 3 m.
Detection angle: 180°.
Brightness limit value: 1 – 500 lux.
Protection class of device: IP 20.
Mounting depth: 31.5 mm.
To be installed with CP-MD-N2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**MSA-F-1.1.1-WL**	2CKA006200A0117	2M	1

Zenit - ABB-free@home

Covers for sensors & actuators

Cover plate - free@home 1-gang sensors

Cover plate for free@home sensors and sensor/actuators with 1-gang sensors code: SU-F-1.0.PB.1, SSA-F-1.1.PB.1, SDA-F-1.1.PB.1 and SBA-F-1.1.PB.1.
Included: 2 buttons without symbol.

Colour	Type	Order code	Size	Qty.*
White	**SR-2-N2 BL**	2CLA222620N1102	2M	1
Dune	**SR-2-N2 DN**	2CLA222620N6202	2M	1
Silver	**SR-2-N2 PL**	2CLA222620N1302	2M	1
Anthracite	**SR-2-N2 AN**	2CLA222620N1802	2M	1
Matt Black	**SR-2-N2 NT**	2CLA222620N1502	2M	1

Cover plate - free@home 2-gang sensors



Cover plate for free@home sensors and sensor/actuators with 2-gang sensors code: SU-F 2.0.PB.1, SSA-F-2.1.PB.1, SSA-F-2.2.PB.1, SDA-F-2.1.PB.1 and SBA-F-2.1.PB.1.
Included: 4 buttons without symbol.

Colour	Type	Order code	Size	Qty.*
White	**SR-4-N2 BL**	2CLA222640N1102	2M	1
Dune	**SR-4-N2 DN**	2CLA222640N6202	2M	1
Silver	**SR-4-N2 PL**	2CLA222640N1302	2M	1
Anthracite	**SR-4-N2 AN**	2CLA222640N1802	2M	1
Matt Black	**SR-4-N2 NT**	2CLA222640N1502	2M	1

Buttons with symbols

free@home button with symbol

Button with free@home symbol for sensor and sensor/actuator's cover plates code: SR-2-N2 and SR-4-N2.
SBL: light symbol.
SBB: blind symbol.
SBS: scene symbol.
SBD: dimmer symbol.

Colour	Type	Order code	Size	Qty.*
White	**SBL-N2BL**	2CLA202610N1102	-	20
Gray	**SBL-N2GR**	2CLA202610N1402	-	20
White	**SBB-N2BL**	2CLA202620N1102	-	20
Gray	**SBB-N2GR**	2CLA202620N1402	-	20
White	**SBS-N2BL**	2CLA202630N1102	-	20
Gray	**SBS-N2GR**	2CLA202630N1402	-	20
White	**SBD-N2BL**	2CLA202640N1102	-	20
Gray	**SBD-N2GR**	2CLA202640N1402	-	20

Cover plate - free@home motion sensor

Cover plate for free@home motion sensors and sensor/actuators code: MD-F-1.0.PB.1 and MSA-F.1.1.PB.1.

Colour	Type	Order code	Size	Qty.*
White	**CP-MD-N2 BL**	2CLA224160N1102	2M	1
Dune	**CP-MD-N2 DN**	2CLA224160N6202	2M	1
Silver	**CP-MD-N2 PL**	2CLA224160N1302	2M	1
Anthracite	**CP-MD-N2 AN**	2CLA224160N1802	2M	1
Matt Black	**CP-MD-N2 NT**	2CLA224160N1502	2M	1

Cover plate - free@home RTC

Cover plate with RTC symbols for free@home room temperature controler code RTC-F-1.PB.

Colour	Type	Order code	Size	Qty.*
White	**CP-RTC-N2 BL**	2CLA224060N1102	2M	1
Dune	**CP-RTC-N2 DN**	2CLA224060N6202	2M	1
Silver	**CP-RTC-N2 PL**	2CLA224060N1302	2M	1
Anthracite	**CP-RTC-N2 AN**	2CLA224060N1802	2M	1
Matt Black	**CP-RTC-N2 NT**	2CLA224060N1502	2M	1

Cover plate - free@home fan coil control

Cover plate with fan coil control symbols for free@home room temperature controler code RTC-F-1.PB.

Colour	Type	Order code	Size	Qty.*
White	**CP-RTC-FC-N2 BL**	2CLA225420N1102	2M	1
Dune	**CP-RTC-FC-N2 DN**	2CLA225420N6202	2M	1
Silver	**CP-RTC-FC-N2 PL**	2CLA225420N1302	2M	1
Anthracite	**CP-RTC-FC-N2 AN**	2CLA225420N1802	2M	1
Matt Black	**CP-RTC-FC-N2 NT**	2CLA225420N1502	2M	1

Zenit - ABB-free@home

Smart Switch

Free@home smart switch

Wireless remote control of ABB-free@home actuators, groups and scenes.
2 / 4 channel.
Requires ABB SysAP/S.3 and ABB-free@next App
Energy harvesting technology: without battery and maintenance-free.
Compatible with N2225.1x and N2225.2 rockers.

Installation	Type	Order code	Size	Qty.*
Flush mounted	**N2225.2**	2CLA222520N1001	2M	1

Rocker cover for smart switch - 2-gang

Rocker cover without symbol for smart switch sensor.
Suitable for codes: N2225, N2225.1 and N2225.2.
Rocker cover for 2-gang control (4 channels).

Colour	Type	Order code	Size	Qty.*
Anthracite	**N2225.2 AN**	2CLA222520N1801	2M	1
White	**N2225.2 BL**	2CLA222520N1101	2M	1
Dune	**N2225.2 DN**	2CLA222520N6201	2M	1
Silver	**N2225.2 PL**	2CLA222520N1301	2M	1
Matt Black	**N2225.2 NT**	2CLA222520N1501	2M	1

Rocker cover for smart switch - 1-gang

Rocker cover without symbol for smart switch sensor.
Suitable for codes: N2225, N2225.1 and N2225.2.
Rocker cover for 1-gang control (2 channels).

Colour	Type	Order code	Size	Qty.*
Anthracite	**N2225.1 AN**	2CLA222510N1801	2M	1
White	**N2225.1 BL**	2CLA222510N1101	2M	1
Dune	**N2225.1 DN**	2CLA222510N6201	2M	1
Silver	**N2225.1 PL**	2CLA222510N1301	2M	1
Matt Black	**N2225.1 NT**	2CLA222510N1501	2M	1

Rocker cover for smart switch - 1-gang with symbol

Rocker cover without symbol for smart switch sensor.
Suitable for codes: N2225, N2225.1 and N2225.2.
Rocker cover for 1-gang control (2 channels).

With lamp symbol

Colour	Type	Order code	Size	Qty.*
Anthracite	**N2225.3 AN**	2CLA222530N1801	2M	1
White	**N2225.3 BL**	2CLA222530N1101	2M	1
Dune	**N2225.3 DN**	2CLA222530N6201	2M	1
Silver	**N2225.3 PL**	2CLA222530N1301	2M	1
Matt Black	**N2225.3 NT**	2CLA222530N1501	2M	1

With blind symbol

Colour	Type	Order code	Size	Qty.*
Anthracite	**N2225.5 AN**	2CLA222550N1801	2M	1
White	**N2225.5 BL**	2CLA222550N1101	2M	1
Dune	**N2225.5 DN**	2CLA222550N6201	2M	1
Silver	**N2225.5 PL**	2CLA222550N1301	2M	1
Matt Black	**N2225.5 NT**	2CLA222550N1501	2M	1

With dimmer symbol

Colour	Type	Order code	Size	Qty.*
Anthracite	**N2225.4 AN**	2CLA222540N1801	2M	1
White	**N2225.4 BL**	2CLA222540N1101	2M	1
Dune	**N2225.4 DN**	2CLA222540N6201	2M	1
Silver	**N2225.4 PL**	2CLA222540N1301	2M	1
Matt Black	**N2225.4 NT**	2CLA222540N1501	2M	1

With scene symbol

Colour	Type	Order code	Size	Qty.*
Anthracite	**N2225.6 AN**	2CLA222560N1801	2M	1
White	**N2225.6 BL**	2CLA222560N1101	2M	1
Dune	**N2225.6 DN**	2CLA222560N6201	2M	1
Silver	**N2225.6 PL**	2CLA222560N1301	2M	1
Matt Black	**N2225.6 NT**	2CLA222560N1501	2M	1

Zenit - ABB i-bus® KNX

Push switch sensors

KNX sensor - 1/2-gang

Push switch function: switching, dimming, blind or scene.
Display elements: LED to indicate the function.
To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Colour	Type	Order code	Size	Qty.*
-	**RS/U 1.1**	2CSY244490R1012	1M	1

KNX sensor - 2/4-gang - 2M

Push switch function: switching, dimming, blind or scene.
Display elements: LED to indicate the function.
To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Colour	Type	Order code	Size	Qty.*
-	**RS/U 2.1**	2CSY247450R1003	2M	1

Push switch sensor & switch actuators

KNX sensor/switch actuator - 2/1-gang

Push switch function: switching, dimming, blind or scene.
Display elements: LED to indicate the function.
Outputs: 1x potential free contact.
Rated current: 16 A. To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Colour	Type	Order code	Size	Qty.*
-	**RA/U 1.16.1**	2CSY249580R1103	2M	1

KNX sensor/switch actuator - 2/2-gang

Push switch function: switching, dimming, blind or scene.
Display elements: LED to indicate the function.
Outputs: 2x potential free contacts.
Rated current: 8 A. To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Colour	Type	Order code	Size	Qty.*
-	**RA/U 2.8.1**	2CSY242150R1106	2M	1

KNX sensor/blind actuator - 1/1-gang

Push switch function: switching, dimming, blind or scene.
Display elements: LED to indicate the function.
Outputs: 1x change-over contacts/potential-bound
Rated current: 8 A.
To be installed with N2221, N2221.1, N2221.3, N2221.5,N2221.8, N2221.9 or N22 customized rockers.

Colour	Type	Order code	Size	Qty.*
-	**RB/U 1.1**	2CSY247240R1105	2M	1

Rocker cover without symbol

Rocker cover without symbol for KNX sensor/actuator.
Suitable for codes: RS/U 1.1 and left and right positions of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121 BB**	2CLA212100N1201	1M	10
White	**N2121 BL**	2CLA212100N1101	1M	10
Dune	**N2121 DN**	2CLA212100N6201	1M	10
Silver	**N2121 PL**	2CLA212100N1301	1M	10
Total Anthracite	**N2121 AA**	2CLA212100N1601	1M	10
Anthracite	**N2121 AN**	2CLA212100N1801	1M	10
Matt Black	**N2121 NT**	2CLA212100N1501	1M	10

Rocker cover without symbol

Rocker cover without symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2221 BB**	2CLA222100N1201	2M	10
White	**N2221 BL**	2CLA222100N1101	2M	10
Dune	**N2221 DN**	2CLA222100N6201	2M	10
Silver	**N2221 PL**	2CLA222100N1301	2M	10
Total Anthracite	**N2221 AA**	2CLA222100N1601	2M	10
Anthracite	**N2221 AN**	2CLA222100N1801	2M	10
Matt Black	**N2221 NT**	2CLA222100N1501	2M	10

Zenit - ABB i-bus® KNX

Rockers for push switch sensors

Rocker cover with lamp symbol

Rocker cover with lamp symbol for KNX sensor/actuator.
Suitable for codes: RS/U 1.1 and left position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121.1 BB**	2CLA212110N1201	1M	10
White	**N2121.1 BL**	2CLA212110N1101	1M	10
Dune	**N2121.1 DN**	2CLA212110N6201	1M	10
Silver	**N2121.1 PL**	2CLA212110N1301	1M	10
Total Anthracite	**N2121.1 AA**	2CLA212110N1601	1M	10
Anthracite	**N2121.1 AN**	2CLA212110N1801	1M	10
Matt Black	**N2121.1 NT**	2CLA212110N1501	1M	10

Rocker cover with blind symbol

Rocker cover with blind symbol for KNX sensor/actuator.
Suitable for codes: RS/U 1.1 and left and right positions of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121.3 BB**	2CLA212130N1201	1M	10
White	**N2121.3 BL**	2CLA212130N1101	1M	10
Dune	**N2121.3 DN**	2CLA212130N6201	1M	10
Silver	**N2121.3 PL**	2CLA212130N1301	1M	10
Total Anthracite	**N2121.3 AA**	2CLA212130N1601	1M	10
Anthracite	**N2121.3 AN**	2CLA212130N1801	1M	10
Matt Black	**N2121.3 NT**	2CLA212130N1501	1M	10

Rocker cover with lamp symbol - Right

Rocker cover with lamp symbol for KNX sensor/actuator.
Suitable for codes: right position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121.1R BB**	2CLA212112N1201	1M	10
White	**N2121.1R BL**	2CLA212112N1101	1M	10
Dune	**N2121.1R DN**	2CLA212112N6201	1M	10
Silver	**N2121.1R PL**	2CLA212112N1301	1M	10
Total Anthracite	**N2121.1R AA**	2CLA212112N1601	1M	10
Anthracite	**N2121.1R AN**	2CLA212112N1801	1M	10
Matt Black	**N2121.1R NT**	2CLA212112N1501	1M	10

Rocker cover with blind symbol

Rocker cover with blind symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2221.3 BB**	2CLA222130N1201	2M	10
White	**N2221.3 BL**	2CLA222130N1101	2M	10
Dune	**N2221.3 DN**	2CLA222130N6201	2M	10
Silver	**N2221.3 PL**	2CLA222130N1301	2M	10
Total Anthracite	**N2221.3 AA**	2CLA222130N1601	2M	10
Anthracite	**N2221.3 AN**	2CLA222130N1801	2M	10
Matt Black	**N2221.3 NT**	2CLA222130N1501	2M	10

Rocker cover with lamp symbol

Rocker cover with lamp symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2221.1 BB**	2CLA222110N1201	2M	10
White	**N2221.1 BL**	2CLA222110N1101	2M	10
Dune	**N2221.1 DN**	2CLA222110N6201	2M	10
Silver	**N2221.1 PL**	2CLA222110N1301	2M	10
Total Anthracite	**N2221.1 AA**	2CLA222110N1601	2M	10
Anthracite	**N2221.1 AN**	2CLA222110N1801	2M	10
Matt Black	**N2221.1 NT**	2CLA222110N1501	2M	10

Rocker cover with ON/OFF symbol

Rocker cover with ON/OFF symbol for KNX sensor/actuator.
Suitable for codes: RS/U 1.1 and left position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121.5 BB**	2CLA212150N1201	1M	10
White	**N2121.5 BL**	2CLA212150N1101	1M	10
Dune	**N2121.5 DN**	2CLA212150N6201	1M	10
Silver	**N2121.5 PL**	2CLA212150N1301	1M	10
Total Anthracite	**N2121.5 AA**	2CLA212150N1601	1M	10
Anthracite	**N2121.5 AN**	2CLA212150N1801	1M	10
Matt Black	**N2121.5 NT**	2CLA212150N1501	1M	10

Zenit - ABB i-bus® KNX

Rockers for push switch sensors

Rocker cover with ON/OFF symbol - Right

Rocker cover with ON/OFF symbol for KNX sensor/actuator.
Suitable for codes: right position of RS/U 2.1, RA/U1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121.5R BB**	2CLA212152N1201	1M	10
White	**N2121.5R BL**	2CLA212152N1101	1M	10
Dune	**N2121.5R DN**	2CLA212152N6201	1M	10
Silver	**N2121.5R PL**	2CLA212152N1301	1M	10
Total Anthracite	**N2121.5R AA**	2CLA212152N1601	1M	10
Anthracite	**N2121.5R AN**	2CLA212152N1801	1M	10
Matt Black	**N2121.5R NT**	2CLA212152N1501	1M	10

Rocker cover with dimmer symbol - Right

Rocker cover with dimmer symbol for KNX sensor/actuator.
Suitable for codes: right position of RS/U 2.1, RA/U1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121.8R BB**	2CLA212182N1201	1M	10
White	**N2121.8R BL**	2CLA212182N1101	1M	10
Dune	**N2121.8R DN**	2CLA212182N6201	1M	10
Silver	**N2121.8R PL**	2CLA212182N1301	1M	10
Total Anthracite	**N2121.8R AA**	2CLA212182N1601	1M	10
Anthracite	**N2121.8R AN**	2CLA212182N1801	1M	10
Matt Black	**N2121.8R NT**	2CLA212182N1501	1M	10

Rocker cover with ON/OFF symbol

Rocker cover with ON/OFF symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2221.5 BB**	2CLA222150N1201	2M	10
White	**N2221.5 BL**	2CLA222150N1101	2M	10
Dune	**N2221.5 DN**	2CLA222150N6201	2M	10
Silver	**N2221.5 PL**	2CLA222150N1301	2M	10
Total Anthracite	**N2221.5 AA**	2CLA222150N1601	2M	10
Anthracite	**N2221.5 AN**	2CLA222150N1801	2M	10
Matt Black	**N2221.5 NT**	2CLA222150N1501	2M	10

Rocker cover with dimmer symbol

Rocker cover with dimmer symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2221.8 BB**	2CLA222180N1201	2M	10
White	**N2221.8 BL**	2CLA222180N1101	2M	10
Dune	**N2221.8 DN**	2CLA222180N6201	2M	10
Silver	**N2221.8 PL**	2CLA222180N1301	2M	10
Total Anthracite	**N2221.8 AA**	2CLA222180N1601	2M	10
Anthracite	**N2221.8 AN**	2CLA222180N1801	2M	10
Matt Black	**N2221.8 NT**	2CLA222180N1501	2M	10

Rocker cover with dimmer symbol - 1M

Rocker cover with dimmer symbol for KNX sensor/actuator.
Suitable for codes: RS/U 1.1 and left position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121.8 BB**	2CLA212180N1201	1M	10
White	**N2121.8 BL**	2CLA212180N1101	1M	10
Dune	**N2121.8 DN**	2CLA212180N6201	1M	10
Silver	**N2121.8 PL**	2CLA212180N1301	1M	10
Total Anthracite	**N2121.8 AA**	2CLA212180N1601	1M	10
Anthracite	**N2121.8 AN**	2CLA212180N1801	1M	10
Matt Black	**N2121.8 NT**	2CLA212180N1501	1M	10

Rocker cover with scene symbol

Rocker cover with scene symbol for KNX sensor/actuator.
Suitable for codes: RS/U 1.1 and left position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121.9 BB**	2CLA212190N1201	1M	10
White	**N2121.9 BL**	2CLA212190N1101	1M	10
Dune	**N2121.9 DN**	2CLA212190N6201	1M	10
Silver	**N2121.9 PL**	2CLA212190N1301	1M	10
Total Anthracite	**N2121.9 AA**	2CLA212190N1601	1M	10
Anthracite	**N2121.9 AN**	2CLA212190N1801	1M	10
Matt Black	**N2121.9 NT**	2CLA212190N1501	1M	10

Zenit - ABB i-bus® KNX

Rockers for push switch sensors

Rocker cover with scene symbol - Right

Rocker cover with scene symbol
for KNX sensor/actuator.
Suitable for codes: right position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121.9R BB**	2CLA212192N1201	1M	10
White	**N2121.9R BL**	2CLA212192N1101	1M	10
Dune	**N2121.9R DN**	2CLA212192N6201	1M	10
Silver	**N2121.9R PL**	2CLA212192N1301	1M	10
Total Anthracite	**N2121.9R AA**	2CLA212192N1601	1M	10
Anthracite	**N2121.9R AN**	2CLA212192N1801	1M	10
Matt Black	**N2121.9R NT**	2CLA212192N1501	1M	10

Rocker cover with scene symbol

Rocker cover with scene symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2221.9 BB**	2CLA222190N1201	2M	10
White	**N2221.9 BL**	2CLA222190N1101	2M	10
Dune	**N2221.9 DN**	2CLA222190N6201	2M	10
Silver	**N2221.9 PL**	2CLA222190N1301	2M	10
Total Anthracite	**N2221.9 AA**	2CLA222190N1601	2M	10
Anthracite	**N2221.9 AN**	2CLA222190N1801	2M	10
Matt Black	**N2221.9 NT**	2CLA222190N1501	2M	10

Rocker cover with custom symbol

Rocker cover with custom symbol for KNX sensor/actuator. Symbol size: 5,6 x 5,6 mm.
Suitable for codes: RS/U 1.1 and left position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121.01 BB**	2CLA212101N1201	1M	200
White	**N2121.01 BL**	2CLA212101N1101	1M	200
Dune	**N2121.01 DN**	2CLA212101N6201	1M	200
Silver	**N2121.01 PL**	2CLA212101N1301	1M	200
Total Anthracite	**N2121.01 AA**	2CLA212101N1601	1M	200
Anthracite	**N2121.01 AN**	2CLA212101N1801	1M	200
Matt Black	**N2121.01 NT**	2CLA212101N1501	1M	200

Rocker cover with custom symbol - Right

Rocker cover with custom symbol for KNX sensor/actuator. Symbol size: 5,6 x 5,6 mm.
Suitable for codes: right position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2121.02 BB**	2CLA212102N1201	1M	200
White	**N2121.02 BL**	2CLA212102N1101	1M	200
Dune	**N2121.02 DN**	2CLA212102N6201	1M	200
Silver	**N2121.02 PL**	2CLA212102N1301	1M	200
Total Anthracite	**N2121.02 AA**	2CLA212102N1601	1M	200
Anthracite	**N2121.02 AN**	2CLA212102N1801	1M	200
Matt Black	**N2121.02 NT**	2CLA212102N1501	1M	200

Rocker cover with custom symbol

Rocker cover with custom symbol for KNX sensor/actuator.
Symbol size: 5,6 x 5,6 mm
Suitable for codes: RB/U 1.1.

Colour	Type	Order code	Size	Qty.*
Total White	**N2221.01 BB**	2CLA222101N1201	2M	200
White	**N2221.01 BL**	2CLA222101N1101	2M	200
Dune	**N2221.01 DN**	2CLA222101N6201	2M	200
Silver	**N2221.01 PL**	2CLA222101N1301	2M	200
Total Anthracite	**N2221.01 AA**	2CLA222101N1601	2M	200
Anthracite	**N2221.01 AN**	2CLA222101N1801	2M	200
Matt Black	**N2221.01 NT**	2CLA222101N1501	2M	200

Zenit - ABB i-bus® KNX

Room temperature controller

KNX room temperature controller

For triggering the heating, ventilation and fan-coil actuators. Thermostat for fan-coil units in 2 and 4 pipe systems and conventional heating or cooling systems. Fan stage can be switched manually or in automatic mode. Switch contacts for operating mode selection and dial for setpoint or fan speed adjustment. Display elements: LCD showing operation modes. To be installed with N2240.4 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**6124/88-509**	2CKA006134A0310	2M	1

Cover plate - KNX RTC

Cover plate for KNX RTC sensors code: 6124/88-509.

Colour	Type	Order code	Size	Qty.*
White	**N2240.4 BL**	2CLA224040N1101	2M	1
Dune	**N2240.4 DN**	2CLA224040N6201	2M	1
Silver	**N2240.4 PL**	2CLA24040N1301	2M	1
Anthracite	**N2240.4 AN**	2CLA224040N1801	2M	1
Matt Black	**N2240.4 NT**	2CLA224040N1501	2M	1

KNX thermostat

Standard KNX thermostat equipped with backlight LCD display 4 push buttons on the front for the following functionalities (Operating mode switching, Fancoil speed manual switching, set point manual increment/decrement).
Possibility to choose different type of control: 2-point ON/OFF, PWM, Continue, Fan- coil
Cover plate included.

Colour	Type	Order code	Size	Qty.*
White	**RT/U 1.1.ZW**	2CSY244280R1202	2M	1
Silver	**RT/U 1.1.ZS**	2CSY242280R1202	2M	1
Anthracite	**RT/U 1.1.ZA**	2CSY249370R1202	2M	1

Transponder reader

KNX transponder reader

The “transponder holder” is designed to realize access control systems through KNX bus.
Output: one relay (4A @24V AC/DC). 3 working modes:
- “Linked to access control”, receiving switching commands from the device itself (according to card insertion/removal).
- Being a standard KNX switch actuator, controlled by every KNX-standard devices.
- “Linked to card-holder”, that means that the relay is switched according to closing/opening internal input contact available on transponder reader.
Input: one input to be used for connecting external conventional card-holder.
The bicolor (red-green) LED on the front of the device allows monitoring the device operation. Can be switched ON/OFF in the proper color according to KNX.
The transponder reader can be configured with ABB control software to behave as transponder programming device.
The transponder reader requires a 12...24 V AC/DC external power supply to ensure its operation even with bus voltage failure.
Cover plate included.

Colour	Type	Order code	Size	Qty.*
White	**TR/U 1.1.ZW**	2CSY244410R5000	2M	1
Silver	**TR/U 1.1.ZS**	2CSY242210R5000	2M	1
Anthracite	**TR/U 1.1.ZA**	2CSY249500R5000	2M	1

Transponder holder

KNX transponder holder

The “transponder holder” is designed to realize access control systems through KNX bus.
Output: one relay (4A @24V AC/DC). 2 working modes:
-“Linked to access control”, receiving switching commands from the device itself (according to card insertion/removal).
- Being a standard KNX switch actuator, controlled by every KNX-standard devices.
Input: one binary input to be used for connecting external conventional push-button, or for example for connecting window contact or similar.
The white blinking LED on the front of the device allows monitoring the device operation. Can be switched ON/OFF in the proper color according to KNX.
The transponder reader requires a 12...24 V AC/DC power supply to ensure its operation even with bus voltage fail.
Cover plate included.

Colour	Type	Order code	Size	Qty.*
White	**TH/U 1.1.ZW**	2CSY244340R5200	2M	1
Silver	**TH/U 1.1.ZS**	2CSY242070R5200	2M	1
Anthracite	**TH/U 1.1.ZA**	2CSY249430R5200	2M	1

Zenit - ABB i-bus® KNX

Push-button sensors

KNX sensor - 1/2-gang

Push button function: switching / dimming / blind / sending values / scenes, etc.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
The accompanying symbol can be replaced by the symbols for lighting, blinds, room thermostat, scene and fan-coil.
Control element: Switch contacts.
Display elements: LED to indicate the function.
To be installed with N2221.2 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**6125/98-509**	2CKA006115A0444	2M	1

KNX sensor - 2/4-gang

Push button function: switching / dimming / blind / sending values / scenes etc.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
The accompanying symbol can be replaced by the symbols for lighting, blinds, room thermostat, scene and fan-coil.
Control element: Switch contacts.
Display elements: LED to indicate the function.
To be installed with N2221.4 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**6126/98-509**	2CKA006116A0219	2M	1

KNX sensor - 3/6-gang

Push button function: switching / dimming / blind / sending values / scenes etc.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
The accompanying symbol can be replaced by the symbols for lighting, blinds, room thermostat, scene and fan-coil.
Control element: Switch contacts.
Display elements: LED to indicate the function.
To be installed with N2221.6 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**6129/96-509**	2CKA006118A0105	2M	1

KNX sensor - 3/6-gang with IR receiver

Push button function: switching / dimming / blind / sending values / scenes etc.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
The accompanying symbol can be replaced by the symbols for lighting, blinds, room thermostat, scene and fan-coil.
Control element: Switch contacts.
Display elements: LED to indicate the function.
To be installed with N2221.7 cover plates.

Colour	Type	Order code	Size	Qty.*
-	**6129/98-509**	2CKA006118A0108	2M	1

Covers for sensors

Cover plate - KNX button type sensors



Cover plate for KNX sensors:
- N2221.2 for 1/2-gang sensor code 6125/98-509.
- N2221.2 for 2/4-gang sensor code 6126/98-509.
- N2221.2 for 3/6-gang sensor code 6129/96-509.
- N2221.2 for 3/6-gang sensor code 6129/98-509.

Colour	Type	Order code	Size	Qty.*
White	**N2221.2 BL**	2CLA222120N1101	2M	1
Dune	**N2221.2 DN**	2CLA222120N6201	2M	1
Silver	**N2221.2 PL**	2CLA222120N1301	2M	1
Anthracite	**N2221.2 AN**	2CLA222120N1801	2M	1
Matt Black	**N2221.2 NT**	2CLA222120N1501	2M	1
White	**N2221.4 BL**	2CLA222140N1101	2M	1
Dune	**N2221.4 DN**	2CLA222140N6201	2M	1
Silver	**N2221.4 PL**	2CLA222140N1301	2M	1
Anthracite	**N2221.4 AN**	2CLA222140N1801	2M	1
Matt Black	**N2221.4 NT**	2CLA222140N1501	2M	1
White	**N2221.6 BL**	2CLA222160N1101	2M	1
Dune	**N2221.6 DN**	2CLA222160N6201	2M	1
Silver	**N2221.6 PL**	2CLA222160N1301	2M	1
Anthracite	**N2221.6 AN**	2CLA222160N1801	2M	1
Matt Black	**N2221.6 NT**	2CLA222160N1501	2M	1
White	**N2221.7 BL**	2CLA222170N1101	2M	1
Dune	**N2221.7 DN**	2CLA222170N6201	2M	1
Silver	**N2221.7 PL**	2CLA222170N1301	2M	1
Anthracite	**N2221.7 AN**	2CLA222170N1801	2M	1
Matt Black	**N2221.7 NT**	2CLA222170N1501	2M	1

KNX button with symbol

Button with ABB i-bus® KNX symbol for sensor's cover plates code: N2221.2, N2221.4, N2221.6 and N2221.7.

Color: gray

Colour	Type	Order code	Size	Qty.*
Light	**6123/20-500**	2CKA006123A0001	-	1
Blind	**6123/21-500**	2CKA006123A0002	-	1
Scene	**6123/22-500**	2CKA006123A0003	-	1
RTC	**6123/23-500**	2CKA006123A0004	-	1
Lamp	**6123/24-500**	2CKA006123A0005	-	1
Fan-coil	**6123/26-500**	2CKA006123A0006	-	1

Zenit S

Frames for European square and round boxes (60 mm screw distance)

4,9 mm height.
The essential frame with a ultra-light profile, being one of the slimmest frames in the market.



02

03

04

05

06

07

08

01 Side view, 4,9 x 85 mm

1 to 4-gang cover frame suitable for horizontal and vertical installation
02 Frame 1-gang, 2 modules
03 Frame 2-gang, 2 + 2 modules
04 Frame 3-gang, 2 + 2 + 2 modules
05 Frame 4-gang, 2 + 2 + 2 + 2 modules
06 Frame 2-gang, 2 + 2 modules vertical
07 Frame 3-gang, 2 + 2 + 2 modules vertical
08 Frame 4-gang, 2 + 2 + 2 + 2 modules vertical

Zenit S

Frames for 3M (4”x2”), 4M and 7M boxes

09

3,9 mm height.
The essential frame with a ultra-light profile, being one of the slimmest frames in the market.

10

11

12

13

14

15

16

17

18

19

09 Side view, 3,9 x 85 mm

1 to 3 module cover frames for 3 module or 4"x2" box vertical installationhabit (83,5 mm screw distance)
10 Frame 1 module for 3 modules box
11 Frame 1 + 1 modules for 3 modules box
11 Frame 2 modules for 3 modules box
13 Frame 3 modules in 3 modules box

1 to 7 module cover frames for 3 module (83,5 mm screw distance), 4 module (107 mm screw distance) and 7 module (100 mm screw distance) box horizontal installation habit
14 Frame 1 module for 3 modules box
15 Frame 1 + 1 modules for 3 modules box
16 Frame 2 modules for 3 modules box
17 Frame 3 modules in 3 modules box
18 Frame 4 modules for 4 modules box
19 Frame 7 modules in 7 modules box

Zenit S

Frames for European square and round boxes
(60 mm screw distance)



BB - Total White

BL - White

DN - Dune

TB - Tacteo White

NT - Matt Black

AN - Anthracite

AA - Total Anthracite

TN - Tacteo Black

PL - Silver

OX - Stainless Steel

NI - Nickel

Zenit S

Frames for 3M (4”x2”), 4M and 7M boxes

BB - Total White

BL - White



DN - Dune



TB - Tacteo White

NT - Matt Black

AN - Anthracite

AA - Total Anthracite

TB - Tacteo Black

PL - Silver

OX - Stainless Steel

NI - Nickel

OM - Matt Gold

MO - Mocha

BL - Taupe

CM - Commodore

Zenit S

Frames for European square and round boxes (60 mm screw distance)

Frames 1 to 4-gang - Classic

Material: polycarbonate
Size (height x width):
- 1-gang: 85 x 85 mm.
- 2-gang: 85 x 156 mm. Vertical: 145 x 85 mm.
- 3-gang: 85 x 227 mm. Vertical: 206 x 85 mm.
- 4-gang: 85 x 298 mm.

Mounting plate code suitable for 60 mm screw distance boxes: Z2271.9, Z2271.93, Z2272.96 and Z2273.97

White - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2271 BL	1-gang	2	2CLA227100Z1101	20
Z2272 BL	2-gang	2+2	2CLA227200Z1101	10
Z2273 BL	3-gang	2+2+2	2CLA227300Z1101	5
Z2274 BL	4-gang	2+2+2+2	2CLA227400Z1101	5
Z2272.2 BL	2-gang	2+2 vertical	2CLA227220Z1101	10
Z2273.2 BL	3-gang	2+2+2 vertical	2CLA227320Z1101	5

White - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2271.A BL	1-gang	2	2CLA227110Z1102	20
Z2272.A BL	2-gang	2+2	2CLA227210Z1102	10
Z2273.A BL	3-gang	2+2+2	2CLA227310Z1102	5
Z2274.A BL	4-gang	2+2+2+2	2CLA227410Z1102	5

Dune - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2271 DN	1-gang	2	2CLA227100Z6201	20
Z2272 DN	2-gang	2+2	2CLA227200Z6201	10
Z2273 DN	3-gang	2+2+2	2CLA227300Z6201	5
Z2274 DN	4-gang	2+2+2+2	2CLA227400Z6201	5
Z2272.2 DN	2-gang	2+2 vertical	2CLA227220Z6201	10
Z2273.2 DN	3-gang	2+2+2 vertical	2CLA227320Z6201	5

Dune - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2271.A DN	1-gang	2	2CLA227110Z6202	20
Z2272.A DN	2-gang	2+2	2CLA227210Z6202	10
Z2273.A DN	3-gang	2+2+2	2CLA227310Z6202	5
Z2274.A DN	4-gang	2+2+2+2	2CLA227410Z6202	5

Matt Black - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2271 NT	1-gang	2	2CLA227100Z1501	20
Z2272 NT	2-gang	2+2	2CLA227200Z1501	10
Z2273 NT	3-gang	2+2+2	2CLA227300Z1501	5
Z2274 NT	4-gang	2+2+2+2	2CLA227400Z1501	5
Z2272.2 NT	2-gang	2+2 vertical	2CLA227220Z1501	10
Z2273.2 NT	3-gang	2+2+2 vertical	2CLA227320Z1501	5

Matt Black - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2271.A NT	1-gang	2	2CLA227110Z1502	20
Z2272.A NT	2-gang	2+2	2CLA227210Z1502	10
Z2273.A NT	3-gang	2+2+2	2CLA227310Z1502	5
Z2274.A NT	4-gang	2+2+2+2	2CLA227410Z1502	5

Anthracite - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2271 AN	1-gang	2	2CLA227100Z1801	20
Z2272 AN	2-gang	2+2	2CLA227200Z1801	10
Z2273 AN	3-gang	2+2+2	2CLA227300Z1801	5
Z2274 AN	4-gang	2+2+2+2	2CLA227400Z1801	5
Z2272.2 AN	2-gang	2+2 vertical	2CLA227220Z1801	10
Z2273.2 AN	3-gang	2+2+2 vertical	2CLA227320Z1801	5

Anthracite - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2271.A AN	1-gang	2	2CLA227110Z1802	20
Z2272.A AN	2-gang	2+2	2CLA227210Z1802	10
Z2273.A AN	3-gang	2+2+2	2CLA227310Z1802	5
Z2274.A AN	4-gang	2+2+2+2	2CLA227410Z1802	5

Silver - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2271 PL	1-gang	2	2CLA227100Z1301	20
Z2272 PL	2-gang	2+2	2CLA227200Z1301	10
Z2273 PL	3-gang	2+2+2	2CLA227300Z1301	5
Z2274 PL	4-gang	2+2+2+2	2CLA227400Z1301	5
Z2272.2 PL	2-gang	2+2 vertical	2CLA227220Z1301	10
Z2273.2 PL	3-gang	2+2+2 vertical	2CLA227320Z1301	5

Silver - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2271.A PL	1-gang	2	2CLA227110Z1302	20
Z2272.A PL	2-gang	2+2	2CLA227210Z1302	10
Z2273.A PL	3-gang	2+2+2	2CLA227310Z1302	5
Z2274.A PL	4-gang	2+2+2+2	2CLA227410Z1302	5

Zenit S

Frames for European square and round boxes (60 mm screw distance)

Frames 1 to 4-gang - Metal

Material: stainless steel
Size (height x width):
- 1-gang: 85 x 85 mm.
- 2-gang: 85 x 156 mm. Vertical: 145 x 85 mm.
- 3-gang: 85 x 227 mm. Vertical: 206 x 85 mm.
- 4-gang: 85 x 298 mm.

Mounting plate code suitable for 60 mm screw distance boxes: Z2271.9, Z2271.93, Z2272.96 and Z2273.97.

Stainless Steel - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2271 OX	1-gang	2	2CLA227100Z4001	1
Z2272 OX	2-gang	2+2	2CLA227200Z4001	1
Z2273 OX	3-gang	2+2+2	2CLA227300Z4001	1
Z2274 OX	4-gang	2+2+2+2	2CLA227400Z4001	1
Z2272.2 OX	2-gang	2+2 vertical	2CLA227220Z4001	1
Z2273.2 OX	3-gang	2+2+2 vertical	2CLA227320Z4001	1

Stainless Steel - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2271.A OX	1-gang	2	2CLA227110Z4002	1
Z2272.A OX	2-gang	2+2	2CLA227210Z4002	1
Z2273.A OX	3-gang	2+2+2	2CLA227310Z4002	1
Z2274.A OX	4-gang	2+2+2+2	2CLA227410Z4002	1

Nickel - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2271 NI	1-gang	2	2CLA227100Z4901	1
Z2272 NI	2-gang	2+2	2CLA227200Z4901	1
Z2273 NI	3-gang	2+2+2	2CLA227300Z4901	1
Z2274 NI	4-gang	2+2+2+2	2CLA227400Z4901	1
Z2272.2 NI	2-gang	2+2 vertical	2CLA227220Z4901	1
Z2273.2 NI	3-gang	2+2+2 vertical	2CLA227320Z4901	1

Nickel - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2271.A NI	1-gang	2	2CLA227110Z4902	1
Z2272.A NI	2-gang	2+2	2CLA227210Z4902	1
Z2273.A NI	3-gang	2+2+2	2CLA227310Z4902	1
Z2274.A NI	4-gang	2+2+2+2	2CLA227410Z4902	1

Frames 1 to 4-gang - Tacteo

Material: PMMA
Size (height x width):
- 1-gang: 85 x 85 mm.
- 2-gang: 85 x 156 mm. Vertical: 145 x 85 mm.
- 3-gang: 85 x 227 mm. Vertical: 205 x 85 mm.
- 4-gang: 85 x 298 mm.

Mounting plate code suitable for 60 mm screw distance boxes: Z2271.9, Z2271.93, Z2272.96 and Z2273.97.

Tacteo White - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2271 TB	1-gang	2	2CLA227100Z3001	1
Z2272 TB	2-gang	2+2	2CLA227200Z3001	1
Z2273 TB	3-gang	2+2+2	2CLA227300Z3001	1
Z2274 TB	4-gang	2+2+2+2	2CLA227400Z3001	1
Z2272.2 TB	2-gang	2+2 vertical	2CLA227220Z3001	1
Z2273.2 TB	3-gang	2+2+2 vertical	2CLA227320Z3001	1

Tacteo White - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2271.A TB	1-gang	2	2CLA227110Z3002	1
Z2272.A TB	2-gang	2+2	2CLA227210Z3002	1
Z2273.A TB	3-gang	2+2+2	2CLA227310Z3002	1
Z2274.A TB	4-gang	2+2+2+2	2CLA227410Z3002	1

Tacteo Black - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2271 TN	1-gang	2	2CLA227100Z3101	1
Z2272 TN	2-gang	2+2	2CLA227200Z3101	1
Z2273 TN	3-gang	2+2+2	2CLA227300Z3101	1
Z2274 TN	4-gang	2+2+2+2	2CLA227400Z3101	1
Z2272.2 TN	2-gang	2+2 vertical	2CLA227220Z3101	1
Z2273.2 TN	3-gang	2+2+2 vertical	2CLA227320Z3101	1

Tacteo Black - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2271.A TN	1-gang	2	2CLA227110Z3102	1
Z2272.A TN	2-gang	2+2	2CLA227210Z3102	1
Z2273.A TN	3-gang	2+2+2	2CLA227310Z3102	1
Z2274.A TN	4-gang	2+2+2+2	2CLA227410Z3102	1

Zenit S

Frames for rectangular 3M (4"×2"), 4M and 7M boxes

Frames - 3, 4 and 7 modules - Classic

Material: polycarbonate
Size (height x width):
- 3M: 117 x 85 mm.
- 4M: 139 x 85 mm.
- 7M: 205 x 85 mm.

Mounting plate codes:
- For 3M box (83,5 mm screw distance): Z2373.91.
- For 4M box (107 mm screw distance): Z2474.91.
- For 7M box (100 mm screw distance): Z2777.91.

White - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2371 BL	3M	1	2CLA237100Z1101	20
Z2372 BL	3M	1+1	2CLA237200Z1101	20
Z2372.2 BL	3M	2	2CLA237220Z1101	20
Z2373 BL	3M	3	2CLA237300Z1101	20
Z2474 BL	4M	4	2CLA247400Z1101	10
Z2777 BL	7M	7	2CLA277700Z1101	5

White - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2371.1 BL	3M	1	2CLA237110Z1102	20
Z2372.1 BL	3M	1+1	2CLA237210Z1102	20
Z2372.21 BL	3M	2	2CLA237221Z1102	20
Z2373.1 BL	3M	3	2CLA237310Z1101	20
Z2474.1 BL	4M	4	2CLA247410Z1101	10
Z2777.1 BL	7M	7	2CLA277710Z1101	5

Dune - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2371 DN	3M	1	2CLA237100Z6201	20
Z2372 DN	3M	1+1	2CLA237200Z6201	20
Z2372.2 DN	3M	2	2CLA237220Z6201	20
Z2373 DN	3M	3	2CLA237300Z6201	20
Z2474 DN	4M	4	2CLA247400Z6201	10
Z2777 DN	7M	7	2CLA277700Z6201	5

Dune - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2371.1 DN	3M	1	2CLA237110Z6202	20
Z2372.1 DN	3M	1+1	2CLA237210Z6202	20
Z2372.21 DN	3M	2	2CLA237221Z6202	20
Z2373.1 DN	3M	3	2CLA237310Z6202	20
Z2474.1 DN	4M	4	2CLA247410Z6202	10
Z2777.1 DN	7M	7	2CLA277710Z6202	5

Matt Black - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2371 NT	3M	1	2CLA237100Z1501	20
Z2372 NT	3M	1+1	2CLA237200Z1501	20
Z2372.2 NT	3M	2	2CLA237220Z1501	20
Z2373 NT	3M	3	2CLA237300Z1501	20
Z2474 NT	4M	4	2CLA247400Z1501	10
Z2777 NT	7M	7	2CLA277700Z1501	5

Matt Black - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2371.1 NT	3M	1	2CLA237110Z1502	20
Z2372.1 NT	3M	1+1	2CLA237210Z1502	20
Z2372.21 NT	3M	2	2CLA237221Z1502	20
Z2373.1 NT	3M	3	2CLA237310Z1502	20
Z2474.1 NT	4M	4	2CLA247410Z1502	10
Z2777.1 NT	7M	7	2CLA277710Z1502	5

Anthracite - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2371 AN	3M	1	2CLA237100Z1801	20
Z2372 AN	3M	1+1	2CLA237200Z1801	20
Z2372.2 AN	3M	2	2CLA237220Z1801	20
Z2373 AN	3M	3	2CLA237300Z1801	20
Z2474 AN	4M	4	2CLA247400Z1801	10
Z2777 AN	7M	7	2CLA277700Z1801	5

Anthracite - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2371.1 AN	3M	1	2CLA237110Z1802	20
Z2372.1 AN	3M	1+1	2CLA237210Z1802	20
Z2372.21 AN	3M	2	2CLA237221Z1802	20
Z2373.1 AN	3M	3	2CLA237310Z1801	20
Z2474.1 AN	4M	4	2CLA247410Z1801	10
Z2777.1 AN	7M	7	2CLA277710Z1801	5

Silver - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2371 PL	3M	1	2CLA237100Z1301	20
Z2372 PL	3M	1+1	2CLA237200Z1301	20
Z2372.2 PL	3M	2	2CLA237220Z1301	20
Z2373 PL	3M	3	2CLA237300Z1301	20
Z2474 PL	4M	4	2CLA247400Z1301	10
Z2777 PL	7M	7	2CLA277700Z1301	5

Silver - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2371.1 PL	3M	1	2CLA237110Z1302	20
Z2372.1 PL	3M	1+1	2CLA237210Z1302	20
Z2372.21 PL	3M	2	2CLA237221Z1302	20
Z2373.1 PL	3M	3	2CLA237310Z1301	20
Z2474.1 PL	4M	4	2CLA247410Z1301	10
Z2777.1 PL	7M	7	2CLA277710Z1301	5

Zenit S

Frames for rectangular 3M (4"×2"), 4M and 7M boxes

Frames - 3, 4 and 7 modules - Metal

Material: stainless steel
Size (height x width):
- 3M: 117 x 85 mm.
- 4M: 139 x 85 mm.
- 7M: 205 x 85 mm.

Mounting plate codes:
- For 3M box (83,5 mm screw distance): Z2373.91.
- For 4M box (107 mm screw distance): Z2474.91.
- For 7M box (100 mm screw distance): Z2777.91.

Stainless Steel - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2373 OX	3M	3	2CLA237300Z4001	1
Z2474 OX	4M	4	2CLA247400Z4001	1
Z2777 OX	7M	7	2CLA277700Z4001	1

Stainless Steel - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2373.1 OX	3M	3	2CLA237310Z4001	1
Z2474.1 OX	4M	4	2CLA247410Z4001	1
Z2777.1 OX	7M	7	2CLA277710Z4001	1

Nickel - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2373 NI	3M	3	2CLA237300Z4901	1
Z2474 NI	4M	4	2CLA247400Z4901	1
Z2777 NI	7M	7	2CLA277700Z4901	1

Nickel - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2373.1 NI	3M	3	2CLA237310Z4902	1
Z2474.1 NI	4M	4	2CLA247410Z4902	1
Z2777.1 NI	7M	7	2CLA277710Z4902	1

Mocha - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2373 MO	3M	3	2CLA237300Z4501	1
Z2474 MO	4M	4	2CLA247400Z4501	1
Z2777 MO	7M	7	2CLA277700Z4501	1

Mocha - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2373.1 MO	3M	3	2CLA237310Z4501	1
Z2474.1 MO	4M	4	2CLA247410Z4501	1
Z2777.1 MO	7M	7	2CLA277710Z4501	1

Matt Gold - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2373 OM	3M	3	2CLA237300Z4601	1
Z2474 OM	4M	4	2CLA247400Z4601	1
Z2777 OM	7M	7	2CLA277700Z4601	1

Matt Gold - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2373.1 OM	3M	3	2CLA237310Z4601	1
Z2474.1 OM	4M	4	2CLA247410Z4601	1
Z2777.1 OM	7M	7	2CLA277710Z4601	1

Zenit S

Frames for rectangular 3M (4"×2"), 4M and 7M boxes

Frames - 3, 4 and 7 modules - Nature

Material: stainless steel
Size (height x width):
- 3M: 117 x 85 mm.
- 4M: 139 x 85 mm.
- 7M: 205 x 85 mm.

Mounting plate codes:
- For 3M box (83,5 mm screw distance): Z2373.91.
- For 4M box (107 mm screw distance): Z2474.91.
- For 7M box (100 mm screw distance): Z2777.91.

Taupe - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2373 TP	3M	3	2CLA237300Z4301	1
Z2474 TP	4M	4	2CLA247400Z4301	1
Z2777 TP	7M	7	2CLA277700Z4301	1

Taupe - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2373.1 TP	3M	3	2CLA237310Z4301	1
Z2474.1 TP	4M	4	2CLA247410Z4301	1
Z2777.1 TP	7M	7	2CLA277710Z4301	1

Commodore - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2373 CM	3M	3	2CLA237300Z4401	1
Z2474 CM	4M	4	2CLA247400Z4401	1
Z2777 CM	7M	7	2CLA277700Z4401	1

Commodore - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2373.1 CM	3M	3	2CLA237310Z4401	1
Z2474.1 CM	4M	4	2CLA247410Z4401	1
Z2777.1 CM	7M	7	2CLA277710Z4401	1

Frames - 3, 4 and 7 modules - Tacteo

Material: methacrylate
Size (height x width):
- 3M: 117 x 85 mm.
- 4M: 139 x 85 mm.
- 7M: 205 x 85 mm.

Mounting plate codes:
- For 3M box (83,5 mm screw distance): Z2373.91.
- For 4M box (107 mm screw distance): Z2474.91.
- For 7M box (100 mm screw distance): Z2777.91.

Tacteo White - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2373 TB	3M	3	2CLA237300Z3001	1
Z2474 TB	4M	4	2CLA247400Z3001	1
Z2777 TB	7M	7	2CLA277700Z3001	1

Tacteo White - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2373.1 TB	3M	3	2CLA237310Z3002	1
Z2474.1 TB	4M	4	2CLA247410Z3002	1
Z2777.1 TB	7M	7	2CLA277710Z3002	1

Tacteo Black - Niessen logo

Type	Size	Modules	Order code	Qty.*
Z2373 TN	3M	3	2CLA237300Z3101	1
Z2474 TN	4M	4	2CLA247400Z3101	1
Z2777 TN	7M	7	2CLA277700Z3101	1

Tacteo Black - ABB logo

Type	Size	Modules	Order code	Qty.*
Z2373.1 TN	3M	3	2CLA237310Z3102	1
Z2474.1 TN	4M	4	2CLA247410Z3102	1
Z2777.1 TN	7M	7	2CLA277710Z3102	1

Zenit S

Mounting plates for Zenit S frames

Mounting plate for European box

For horizontal and vertical installation.
To be installed with frames code:
N227X and N227X.A.
Mounting plate suitable for 60 mm screw distance boxes.
With aligning flaps for multigang frames.

Type	Size	Modules	Order code	Qty.*
Z2271.9	1-gang	2 modules	2CLA227190Z1001	20

Mounting plate for European box with clamps

For horizontal and vertical installation.
To be installed with frames code: N227X and N227X.A.
Mounting plate suitable for 60 mm screw distance boxes. With aligning flaps for multigang frames.
Included: fixing claws.

Type	Size	Modules	Order code	Qty.*
Z2271.93	1-gang	2 modules	2CLA227193Z1001	20

Mounting plate for 71/60 mm step box

For horizontal and vertical installation.
To be installed with frames code:
N227X and N227X.A.
Mounting plate suitable for 60 mm screw distance boxes with 71 mm step in horizontal and 60 mm step in vertical.
With aligning flaps for multigang frames.

Type	Size	Modules	Order code	Qty.*
Z2271.96	1-gang	2 modules	2CLA227196Z1001	20

Mounting plate for 71/60 mm box with clamps

For horizontal and vertical installation.
To be installed with frames code: N227X and N227X.A. Mounting plate suitable for 60 mm screw distance boxes with 71 mm step in horizontal and 60 mm step in vertical.
With aligning flaps for multigang frames.
Included: fixing claws.

Type	Size	Modules	Order code	Qty.*
Z2271.97	1-gang	2 modules	2CLA227197Z1001	20

Mounting plate for 3 module box

For horizontal and vertical installation of 1, 2 or 3 module devices. To be installed with frames code: Z2371, Z2371.1, Z2372, Z2372.1, Z2372.2, Z2373.21, Z2373 and Z2373.1. Mounting plate suitable for 83,5 mm screw distance boxes.
Included: 2 screws to fix the mounting plate.

Type	Size	Modules	Order code	Qty.*
Z2373.91	3M	3 modules	2CLA237391Z1001	20

Mounting plate for 4 module box

For horizontal and vertical installation of 1, 2 or 3 module devices.
To be installed with frames code: Z2474 and Z2474.1.
Mounting plate suitable for 107 mm screw distance boxes.
Included: 2 screws to fix the mounting plate.

Type	Size	Modules	Order code	Qty.*
Z2474.91	4M	4 modules	2CLA247491Z1001	20

Mounting plate for 7 module box

For horizontal and vertical installation of 1, 2 or 3 module devices.
To be installed with frames code: Z2777 and Z2777.1.
Mounting plate suitable for 100 mm screw distance boxes.
Included: 4 screws to fix the mounting plate.

Type	Size	Modules	Order code	Qty.*
Z2777.91	7M	7 modules	2CLA277791Z1001	20

Mounting plate for 3 module box - Vertical

Mounting plate that facilitates the assembly of 1 and 2 module devices in vertical installations.
To be installed with frames code:
Z2372.2 and Z2372.21.
Mounting plate suitable for 83,5 mm screw distance boxes.

Type	Size	Modules	Order code	Qty.*
Z2372.9	3M	2 modules	2CLA237290Z1001	20

Zenit R Solid

Frames for European square and round boxes (60 mm screw distance)

Frames 1 to 4-gang - Classic

Material: polycarbonate
Size (height x width):
- 1-gang: 85 x 85 mm.
- 2-gang: 85 x 156 mm.
- 3-gang: 85 x 227 mm.
- 4-gang: 85 x 298 mm.

Mounting grid code suitable for 60 mm screw distance boxes: N2271 .9 and N2271 .9G.

White - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2171.1 BL	1-gang	1	2CLA217110N1101	20
N2271.1 BL	1-gang	2	2CLA227110N1101	20
N2272.1 BL	2-gang	2+2	2CLA227210N1101	10
N2273.1 BL	3-gang	2+2+2	2CLA227310N1101	5
N2274.1 BL	4-gang	2+2+2+2	2CLA227410N1101	5

Dune - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2271.1 DN	1-gang	2	2CLA227110N6201	20
N2272.1 DN	2-gang	2+2	2CLA227210N6201	10
N2273.1 DN	3-gang	2+2+2	2CLA227310N6201	5
N2274.1 DN	4-gang	2+2+2+2	2CLA227410N6201	5

Matt Black - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2271.1 NT	1-gang	2	2CLA227110N1501	20
N2272.1 NT	2-gang	2+2	2CLA227210N1501	10
N2273.1 NT	3-gang	2+2+2	2CLA227310N1501	5
N2274.1 NT	4-gang	2+2+2+2	2CLA227410N1501	5

Anthracite - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2271 AN	1-gang	2	2CLA227110N1801	20
N2272 AN	2-gang	2+2	2CLA227210N1801	10
N2273 AN	3-gang	2+2+2	2CLA227310N1801	5
N2274 AN	4-gang	2+2+2+2	2CLA227410N1801	5

Silver - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2271.1 PL	1-gang	2	2CLA227110N1301	20
N2272.1 PL	2-gang	2+2	2CLA227210N1301	10
N2273.1 PL	3-gang	2+2+2	2CLA227310N1301	5
N2274.1 PL	4-gang	2+2+2+2	2CLA227410N1301	5

White - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271.1 BL	1-gang	2	2CLA227110N1102	20
N2272.1 BL	2-gang	2+2	2CLA227210N1102	10
N2273.1 BL	3-gang	2+2+2	2CLA227310N1102	5
N2274.1 BL	4-gang	2+2+2+2	2CLA227410N1102	5

Dune - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271.1 DN	1-gang	2	2CLA227110N6202	20
N2272.1 DN	2-gang	2+2	2CLA227210N6202	10
N2273.1 DN	3-gang	2+2+2	2CLA227310N6202	5
N2274.1 DN	4-gang	2+2+2+2	2CLA227410N6202	5

Matt Black - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271.1 NT	1-gang	2	2CLA227110N1502	20
N2272.1 NT	2-gang	2+2	2CLA227210N1502	10
N2273.1 NT	3-gang	2+2+2	2CLA227310N1502	5
N2274.1 NT	4-gang	2+2+2+2	2CLA227410N1502	5

Anthracite - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271.1 AN	1-gang	2	2CLA227110N1802	20
N2272.1 AN	2-gang	2+2	2CLA227210N1802	10
N2273.1 AN	3-gang	2+2+2	2CLA227310N1802	5
N2274.1 AN	4-gang	2+2+2+2	2CLA227410N1802	5

Silver - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271.1 PL	1-gang	2	2CLA227110N1302	20
N2272.1 PL	2-gang	2+2	2CLA227210N1302	10
N2273.1 PL	3-gang	2+2+2	2CLA227310N1302	5
N2274.1 PL	4-gang	2+2+2+2	2CLA227410N1302	5

Notes

Zenit R

Frames for European square and round boxes

01

7,5 mm height. Visually lightened through the 2 piece floating effect.

02

03

01 Side view, 7,5 x 85 mm (8 x 90 mm for noble materials)
1 to 5-gang cover frame suitable for horizontal and vertical installation
02 Frame 1-gang, 1 module
03 Frame 1-gang, 2 modules
04 Frame 2-gang, 2 + 2 modules
05 Frame 3-gang, 2 + 2 + 2 modules horizontal
06 Frame 3-gang, 2 + 2 + 2 modules vertical
07 Frame 4-gang, 2 + 2 + 2 + 2 modules
08 Frame 5-gang, 2 + 2 + 2 + 2 + 2 modules

04

05

06

07

08

Zenit R

Frames for 3M (4”x2”), 4M, 7M, 4”x4” boxes

09

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

1 to 3 module cover frames for 3 module or 4“x2“ box vertical installation habits (American)
09 Frame blank for 3 modules box
10 Frame 1 module vertical for 3 modules box
11 Frame 1 module for 3 modules box
12 Frame 1 + 1 modules for 3 modules box
13 Frame 2 modules for 3 modules box
14 Frame 3 modules in 3 modules box

1 to 7 module cover frames for 3, 4 and 7 module box horizontal installation habit (Italian)
15 Frame 1 module for 3 modules box
16 Frame 1 + 1 modules for 3 modules box
17 Frame 2 modules for 3 modules box
18 Frame 3 modules in 3 modules box
19 Frame 4 modules for 4 modules box
20 Frame 7 modules in 7 modules box

3+3 module cover frames for 4”x4” box installation habit (American and Eastern Asia)
21 Frame blank for 4“ x 4“ box
22 Frame 1 + 1 modules for 4“ x 4“ box
23 Frame 2 + 2 modules for 4“ x 4“ box
24 Frame 1 + 1 + 1 + 1 modules for 4“ x 4“ box
25 Frame 3 + 3 modules for 4“ x 4“ box

Zenit R

Frames for European square and round boxes

BL - White

DN - Dune

AN - Anthracite

NT - Matt Black

AN - Anthracite

CB - White Glass

CN - Black Glass

CH - Champagne Glass

CF - Graphite Glass

CP - Pearl Glass

CC - Coffee Glass

PZ - Slate

WG - Wenge

OX - Stainless Steel

Zenit R

Frames for 3M (4”x2”), 4M, 7M, and 4”x4” boxes

BL - White

DN - Dune

PL - Silver

NT - Matt Black

AN – Anthracite

CB – White Glass



CN - Black Glass

CH –Champagne Glass

CF - Graphite

CP – Pearl Glass

CC - Coffee Glass

PZ - Slate

WG - Wenge

OX - Stainless Steel

Zenit R Float

Frames for European square and round boxes

Frames 1 to 4-gang - Glass

Material: 4mm thickness glass
Size (height x width):
- 1-gang: 90 x 90 mm.
- 2-gang: 90 x 161 mm.
- 3-gang: 90 x 232 mm.
- 4-gang: 90 x 303 mm.

Mounting grid code suitable for 60 mm screw distance boxes: N2271.9, N2271.9G, N2272.9 and N2273.9 (N2272.9 and N2273.9 only for horizontal installation).
Flush mounting boxes code: 1099, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

White Glass - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2271 CB	1-gang	2	2CLA227100N3001	1
N2272 CB	2-gang	2+2	2CLA227200N3001	1
N2273 CB	3-gang	2+2+2	2CLA227300N3001	1
N2274 CB	4-gang	2+2+2+2	2CLA227400N3001	1

Black Glass - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2271 CN	1-gang	2	2CLA227100N3101	1
N2272 CN	2-gang	2+2	2CLA227200N3101	1
N2273 CN	3-gang	2+2+2	2CLA227300N3101	1
N2274 CN	4-gang	2+2+2+2	2CLA227400N3101	1

Pearl Glass - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2271 CP	1-gang	2	2CLA227100N3501	1
N2272 CP	2-gang	2+2	2CLA227200N3501	1
N2273 CP	3-gang	2+2+2	2CLA227300N3501	1
N2274 CP	4-gang	2+2+2+2	2CLA227400N3501	1

Coffee Glass - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2271 CC	1-gang	2	2CLA227100N3701	1
N2272 CC	2-gang	2+2	2CLA227200N3701	1
N2273 CC	3-gang	2+2+2	2CLA227300N3701	1
N2274 CC	4-gang	2+2+2+2	2CLA227400N3701	1

Graphite Glass

Type	Size	Modules	Order code	Qty.*
N2271 CF	1-gang	2	2CLA227100N3801	1
N2272 CF	2-gang	2+2	2CLA227200N3801	1
N2273 CF	3-gang	2+2+2	2CLA227300N3801	1
N2274 CF	4-gang	2+2+2+2	2CLA227400N3801	1

Champagne Glass

Type	Size	Modules	Order code	Qty.*
N2271 CH	1-gang	2	2CLA227100N3901	1
N2272 CH	2-gang	2+2	2CLA227200N3901	1
N2273 CH	3-gang	2+2+2	2CLA227300N3901	1
N2274 CH	4-gang	2+2+2+2	2CLA227400N3901	1

Frames 1 to 4-gang - Glass

Material: 4mm thickness glass
Size (height x width):
- 1-gang: 90 x 90 mm.
- 2-gang: 90 x 161 mm.
- 3-gang: 90 x 232 mm.
- 4-gang: 90 x 303 mm.

Mounting grid code suitable for 60 mm screw distance boxes: N2271.9, N2271.9G, N2272.9 and N2273.9 (N2272.9 and N2273.9 only for horizontal installation).
Flush mounting boxes code: 1099, 1999 & 1999.2.
Surface mounting boxes code: 8591, 8592 & 8593.

White Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271 CB	1-gang	2	2CLA227100N3002	1
N2272 CB	2-gang	2+2	2CLA227200N3002	1
N2273 CB	3-gang	2+2+2	2CLA227300N3002	1
N2274 CB	4-gang	2+2+2+2	2CLA227400N3002	1

Black Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271 CN	1-gang	2	2CLA227100N3102	1
N2272 CN	2-gang	2+2	2CLA227200N3102	1
N2273 CN	3-gang	2+2+2	2CLA227300N3102	1
N2274 CN	4-gang	2+2+2+2	2CLA227400N3102	1

Pearl Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271 CP	1-gang	2	2CLA227100N3502	1
N2272 CP	2-gang	2+2	2CLA227200N3502	1
N2273 CP	3-gang	2+2+2	2CLA227300N3502	1
N2274 CP	4-gang	2+2+2+2	2CLA227400N3502	1

Coffee Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271 CC	1-gang	2	2CLA227100N3702	1
N2272 CC	2-gang	2+2	2CLA227200N3702	1
N2273 CC	3-gang	2+2+2	2CLA227300N3702	1
N2274 CC	4-gang	2+2+2+2	2CLA227400N3702	1

Graphite Glass

Type	Size	Modules	Order code	Qty.*
N2271 CF	1-gang	2	2CLA227100N3802	1
N2272 CF	2-gang	2+2	2CLA227200N3802	1
N2273 CF	3-gang	2+2+2	2CLA227300N3802	1
N2274 CF	4-gang	2+2+2+2	2CLA227400N3802	1

Champagne Glass

Type	Size	Modules	Order code	Qty.*
N2271 CH	1-gang	2	2CLA227100N3902	1
N2272 CH	2-gang	2+2	2CLA227200N3902	1
N2273 CH	3-gang	2+2+2	2CLA227300N3902	1
N2274 CH	4-gang	2+2+2+2	2CLA227400N3902	1

Zenit R Float

Frames for European square and round boxes

Frames 1 to 4-gang - Noble

Material: 4mm thickness slate or wenge wood
Size (height x width):
- 1-gang: 90 x 90 mm.
- 2-gang: 90 x 161 mm.
- 3-gang: 90 x 232 mm.
- 4-gang: 90 x 303 mm.

Mounting grid code suitable for 60 mm. screw distance boxes: N2271.9, N2271.9G, N2272.9 and N2273.9 (N2272.9 and N2273.9 only for horizontal installation).

Frames 1 to 4-gang - Metallic

Material: 4mm thickness slate or wenge wood
Size (height x width):
- 1-gang: 90 x 90 mm.
- 2-gang: 90 x 161 mm.
- 3-gang: 90 x 232 mm.
- 4-gang: 90 x 303 mm.

Mounting grid code suitable for 60 mm. screw distance boxes: N2271.9, N2271.9G, N2272.9 and N2273.9 (N2272.9 and N2273.9 only for horizontal installation).

Slate - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2271 PZ	1-gang	1	2CLA227100N2201	1
N2272 PZ	2-gang	2+2	2CLA227200N2201	1
N2273 PZ	3-gang	2+2+2	2CLA227300N2201	1
N2274 PZ	4-gang	2+2+2+2	2CLA227400N2201	1

Stainless Steel - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2271 OX	1-gang	1	2CLA227100N4001	1
N2272 OX	2-gang	2+2	2CLA227200N4001	1
N2273 OX	3-gang	2+2+2	2CLA227300N4001	1
N2274 OX	4-gang	2+2+2+2	2CLA227400N4001	1

Slate - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271 PZ	1-gang	1	2CLA227100N2202	1
N2272 PZ	2-gang	2+2	2CLA227200N2202	1
N2273 PZ	3-gang	2+2+2	2CLA227300N2202	1
N2274 PZ	4-gang	2+2+2+2	2CLA227400N2202	1

Stainless Steel - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271 OX	1-gang	1	2CLA227100N4002	1
N2272 OX	2-gang	2+2	2CLA227200N4002	1
N2273 OX	3-gang	2+2+2	2CLA227300N4002	1
N2274 OX	4-gang	2+2+2+2	2CLA227400N4002	1

Wenge - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2271 WG	1-gang	1	2CLA227100N2101	1
N2272 WG	2-gang	2+2	2CLA227200N2101	1
N2273 WG	3-gang	2+2+2	2CLA227300N2101	1
N2274 WG	4-gang	2+2+2+2	2CLA227400N2101	1

Wenge - ABB logo

Type	Size	Modules	Order code	Qty.*
N2271 WG	1-gang	1	2CLA227100N2102	1
N2272 WG	2-gang	2+2	2CLA227200N2102	1
N2273 WG	3-gang	2+2+2	2CLA227300N2102	1
N2274 WG	4-gang	2+2+2+2	2CLA227400N2102	1

Zenit R Float

Frames for rectangular 3M (4"×2"), 4M and 7M boxes

Frames - 3, 4 and 7 modules - Classic

Material: polycarbonate
Size (width x height):
- 3M: 117 x 85 mm.
- 4M: 139 x 85 mm.
- 7M: 210 x 90 mm.

Mounting plate codes:
- For 3M box (83,5 mm screw distance): N2473.9.
- For 4M box (107 mm screw distance): N2474.9.
- For 7M box (100 mm screw distance): N2777.9.

White

Type	Size	Modules	Order code	Qty.*
N2471 BL	3M	1	2CLA247100N1101	20
N2472 BL	3M	2	2CLA247200N1101	20
N2472.2 BL	3M	1+1	2CLA247220N1101	20
N2473 BL	3M	3	2CLA247300N1101	20
N2474 BL	4M	4	2CLA247400N1101	10
N2777 BL	7M	7	2CLA277700N1101	5

White - ABB logo

Type	Size	Modules	Order code	Qty.*
N2371 BL	3M	1	2CLA237100N1102	20
N2372 BL	3M	2	2CLA237200N1102	20
N2372.3 BL	3M	1+1	2CLA237230N1102	20
N2373 BL	3M	3	2CLA237300N1102	20
N2374.1 BL	4M	4	2CLA237410N1102	10
N2777.1 BL	7M	7	2CLA277710N1102	5

Silver

Type	Size	Modules	Order code	Qty.*
N2471 PL	3M	1	2CLA247100N1301	20
N2472 PL	3M	2	2CLA247200N1301	20
N2472.2 PL	3M	1+1	2CLA247220N1301	20
N2473 PL	3M	3	2CLA247300N1301	20
N2474 PL	4M	4	2CLA247400N1301	10
N2777 PL	7M	7	2CLA277700N1301	5

Silver - ABB logo

Type	Size	Modules	Order code	Qty.*
N2371 PL	3M	1	2CLA237100N1302	20
N2372 PL	3M	2	2CLA237200N1302	20
N2372.3 PL	3M	1+1	2CLA237230N1302	20
N2373 PL	3M	3	2CLA237300N1302	20
N2374.1 PL	4M	4	2CLA237410N1302	10
N2777.1 PL	7M	7	2CLA277710N1302	5

Anthracite

Type	Size	Modules	Order code	Qty.*
N2471 AN	3M	1	2CLA247100N1801	20
N2472 AN	3M	2	2CLA247200N1801	20
N2472.2 AN	3M	1+1	2CLA247220N1801	20
N2473 AN	3M	3	2CLA247300N1801	20
N2474 AN	4M	4	2CLA247400N1801	10
N2777 AN	7M	7	2CLA277700N1801	5

Anthracite - ABB logo

Type	Size	Modules	Order code	Qty.*
N2371 AN	3M	1	2CLA237100N1802	20
N2372 AN	3M	2	2CLA237200N1802	20
N2372.3 AN	3M	1+1	2CLA237230N1802	20
N2373 AN	3M	3	2CLA237300N1802	20
N2374.1 AN	4M	4	2CLA237410N1802	10
N2777.1 AN	7M	7	2CLA277710N1802	5

Zenit R Float

Frames for rectangular 3M (4"×2"), 4M and 7M boxes

Frames - 3, 4 and 7 modules - Glass

Material: 4mm thickness glass
Size (width x height):
- 3M: 122 x 90 mm.
- 4M: 142 x 90 mm.
- 7M: 208 x 90 mm.

Mounting plate codes:
- For 3M box (83,5 mm screw distance): N2371.9 and N2473.9 (N2371.9 only for vertical installation with frames N2371.1 and N2372.1).
- For 4M box (107 mm screw distance): N2474.9.
- For 7M box (100 mm screw distance): N2777.9.

Mounting box codes:
- 3M flush mounting: 499.3 / Surface mounting N2993.
- 4M flush mounting: 1499.4 / Surface mounting N2994.
- 7M flush mounting: 1499.7.

Codes N2474 CP/CC/CF/CH and N2777 XX without logo.

White Glass - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2472 CB	3M	2	2CLA247200N3001	1
N2473 CB	3M	3	2CLA247300N3001	1
N2474 CB	4M	4	2CLA247400N3001	1
N2777 CB	7M	7	2CLA277700N3002	1

White Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2372.1 CB	3M	2	2CLA237200N3002	1
N2373.1 CB	3M	3	2CLA237300N3002	1
N2374.1 CB	4M	4	2CLA237400N3002	1
N2777 CB	7M	7	2CLA277700N3002	1

Black Glass - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2472 CN	3M	2	2CLA247200N3101	1
N2473 CN	3M	3	2CLA247300N3101	1
N2474 CN	4M	4	2CLA247400N3101	1
N2777 CN	7M	7	2CLA277700N3102	1

Black Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2372.1 CN	3M	2	2CLA237200N3102	1
N2373.1 CN	3M	3	2CLA237300N3102	1
N2374.1 CN	4M	4	2CLA237400N3102	1
N2777 CN	7M	7	2CLA277700N3102	1

Pearl Glass - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2473 CP	3M	3	2CLA247300N3501	1
N2474 CP	4M	4	2CLA247400N3502	1
N2777 CP	7M	7	2CLA277700N3502	1

Pearl Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2373.1 CP	3M	3	2CLA237300N3502	1
N2474 CP	4M	4	2CLA247400N3502	1
N2777 CP	7M	7	2CLA277700N3502	1

Coffee Glass - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2473 CC	3M	3	2CLA247300N3701	1
N2474 CC	4M	4	2CLA247400N3702	1
N2777 CC	7M	7	2CLA277700N3702	1

Coffee Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2373.1 CC	3M	3	2CLA237300N3702	1
N2474 CC	4M	4	2CLA247400N3702	1
N2777 CC	7M	7	2CLA277700N3702	1

Graphite Glass - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2473 CF	3M	3	2CLA247300N3801	1
N2474 CF	4M	4	2CLA247400N3802	1
N2777 CF	7M	7	2CLA277700N3802	1

Graphite Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2373.1 CF	3M	3	2CLA237300N3802	1
N2474 CF	4M	4	2CLA247400N3802	1
N2777 CF	7M	7	2CLA277700N3802	1

Champagne Glass - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2473 CH	3M	3	2CLA247300N3901	1
N2474 CH	4M	4	2CLA247400N3902	1
N2777 CH	7M	7	2CLA277700N3902	1

Champagne Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2373.1 CH	3M	3	2CLA237300N3902	1
N2474 CH	4M	4	2CLA247400N3902	1
N2777 CH	7M	7	2CLA277700N3902	1

Zenit R Float

Frames for rectangular 3M (4"×2"), 4M and 7M boxes

Frames - 3, 4 and 7 modules - Noble

Material: 4mm thickness slate, wenge wood or stainless steel
Size (width x height):
- 3M: 122 x 90 mm.
- 4M: 142 x 90 mm.
- 7M: 208 x 90 mm.

Mounting plate codes:
- For 3M box (83,5 mm screw distance): N2371.9 and N2473.9 (N2371.9 only for vertical installation with frames N2371.1 and N2372.1).
- For 4M box (107 mm screw distance): N2474.9.
- For 7M box (100 mm screw distance): N2777.9.

Codes N2777 PZ and N2777 WG without logo

Slate - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2472 PZ	3M	2	2CLA247200N2201	1
N2473 PZ	3M	3	2CLA247300N2201	1
N2474 PZ	4M	4	2CLA247400N2201	1
N2777 PZ	7M	7	2CLA277700N2202	1

Slate - ABB logo

Type	Size	Modules	Order code	Qty.*
N2372.1	3M	2	2CLA237200N2202	1
N2373.1	3M	3	2CLA237300N2202	1
N2374.1	4M	4	2CLA237400N2202	1
N2777 PZ	7M	7	2CLA277700N2202	1

Wenge - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2472 WG	3M	2	2CLA247200N2101	1
N2473 WG	3M	3	2CLA247300N2101	1
N2474 WG	4M	4	2CLA247400N2101	1
N2777 WG	7M	7	2CLA277700N2102	1

Wenge - ABB logo

Type	Size	Modules	Order code	Qty.*
N2372.1 WG	3M	2	2CLA237210N2102	1
N2373.1 WG	3M	3	2CLA237310N2102	1
N2374.1 WG	4M	4	2CLA237410N2102	1
N2777 WG	7M	7	2CLA277700N2102	1

Stainless Steel - Niessen logo

Type	Size	Modules	Order code	Qty.*
N2472 OX	3M	2	2CLA247200N4001	1
N2473 OX	3M	3	2CLA247300N4001	1
N2474 OX	4M	4	2CLA247400N4001	1
N2777 OX	7M	7	2CLA277700N4002	1

Stainless Steel - ABB logo

Type	Size	Modules	Order code	Qty.*
N2372.1 OX	3M	2	2CLA237200N4002	1
N2373.1 OX	3M	3	2CLA237300N4002	1
N2374.1 OX	4M	4	2CLA237400N4002	1
N2777 OX	7M	7	2CLA277700N4002	1

Frames - 3 modules - Classic

Material: polycarbonate
Size (height x width): 122 x 90 mm.
Mounting plate codes (83,5 mm screw distance boxes - 4" x 2"): N2371.9 and N2473.9 (N2371.9 only for vertical installation of the devices with frames N2371.1 and N2372.1).

White - ABB logo

Type	Size	Modules	Order code	Qty.*
N2370.1 BL	3M	Blank	2CLA237010N1102	20
N2371.1 BL	3M	1	2CLA237110N1102	20
N2371.1V BL	3M	1 Vert.	2CLA237190N1102	20
N2372.1 BL	3M	2	2CLA237210N1102	20
N2372.2 BL	3M	1+1	2CLA237220N1102	20
N2373.1 BL	3M	3	2CLA237310N1102	20

Silver - ABB logo

Type	Size	Modules	Order code	Qty.*
N2370.1 PL	3M	Blank	2CLA237010N1302	20
N2371.1 PL	3M	1	2CLA237110N1302	20
N2371.1V PL	3M	1 Vert.	2CLA237190N1302	20
N2372.1 PL	3M	2	2CLA237210N1302	20
N2372.2 PL	3M	1+1	2CLA237220N1302	20
N2373.1 PL	3M	3	2CLA237310N1302	20

Anthracite - ABB logo

Type	Size	Modules	Order code	Qty.*
N2370.1 AN	3M	Blank	2CLA237010N1802	20
N2371.1 AN	3M	1	2CLA237110N1802	20
N2371.1V AN	3M	1 Vert.	2CLA237190N1802	20
N2372.1 AN	3M	2	2CLA237210N1802	20
N2372.2 AN	3M	1+1	2CLA237220N1802	20
N2373.1 AN	3M	3	2CLA237310N1802	20

Zenit R Float

Frames for 4”x4” boxes

Frames - 3+3 modules - Classic

Material: polycarbonate
Size (height x width): 122 x 138 mm.
Mounting plate code suitable for 4” x 4” boxes: N2673.9.

White - ABB logo

Type	Size	Modules	Order code	Qty.*
N2670 BL	4”x 4”	Blank	2CLA267000N1102	5
N2671.1 BL	4”x 4”	1+1	2CLA267110N1102	5
N2672.2 BL	4”x 4”	2+2	2CLA267220N1102	5
N2672.4 BL	4”x 4”	1+1+1+1	2CLA267240N1102	5
N2673.6 BL	4”x 4”	3+3	2CLA267360N1102	5

Silver - ABB logo

Type	Size	Modules	Order code	Qty.*
N2670 PL	4”x 4”	Blank	2CLA267000N1302	5
N2671.1 PL	4”x 4”	1+1	2CLA267110N1302	5
N2672.2 PL	4”x 4”	2+2	2CLA267220N1302	5
N2672.4 PL	4”x 4”	1+1+1+1	2CLA267240N1302	5
N2673.6 PL	4”x 4”	3+3	2CLA267360N1302	5

Anthracite - ABB logo

Type	Size	Modules	Order code	Qty.*
N2670 AN	4”x 4”	Blank	2CLA267000N1802	5
N2671.1 AN	4”x 4”	1+1	2CLA267110N1802	5
N2672.2 AN	4”x 4”	2+2	2CLA267220N1802	5
N2672.4 AN	4”x 4”	1+1+1+1	2CLA267240N1802	5
N2673.6 AN	4”x 4”	3+3	2CLA267360N1802	5

Frames - 3+3 modules - Glass

Material: 4mm thickness glass
Size (height x width): 122 x 138 mm.
Mounting plate code suitable for 4” x 4” boxes: N2673.9..

White Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2673.6 CB	4”x 4”	3+3	2CLA267360N3002	2

Black Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2673.6 CN	4”x 4”	3+3	2CLA267360N3102	2

Pearl Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2673.6 CP	4”x 4”	3+3	2CLA267360N3502	2

Coffee Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2673.6 CC	4”x 4”	3+3	2CLA267360N3702	2

Graphite Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2673.6 CF	4”x 4”	3+3	2CLA267360N3802	2

Champagne Glass - ABB logo

Type	Size	Modules	Order code	Qty.*
N2673.6 CH	4”x 4”	3+3	2CLA267360N3902	2

Frames - 3+3 modules - Noble

Material: 4mm thickness slate or wenge wood
Size (height x width): 122 x 138 mm.
Mounting plate code suitable for 4” x 4” boxes: N2673.9.

Slate - ABB logo

Type	Size	Modules	Order code	Qty.*
N2673.6 PZ	4”x 4”	3+3	2CLA267360N2202	2

Wenge - ABB logo

Type	Size	Modules	Order code	Qty.*
N2673.6 WG	4”x 4”	3+3	2CLA267360N2102	2

Frames - 3+3 modules - Metallic

Material: 4mm thickness stainless steel
Size (height x width): 122 x 138 mm.
Mounting plate code suitable for 4” x 4” boxes: N2673.9.

Slate - ABB logo

Type	Size	Modules	Order code	Qty.*
N2673.6 OX	4”x 4”	3+3	2CLA267360N4002	2

Zenit R

Mounting plates for Zenit R Solid, Zenit R Float and Zenit IP44 frames

Mounting plate for European box

For horizontal and vertical installation.
To be installed with frames code: N2171, N227X, N227X.1 and N227X.44. Mounting plate suitable for 60 mm screw distance boxes.
With aligning flaps for multigang frames.
Optional: elastic claws N2071.9.

Type	Size	Modules	Order code	Qty.*
N2271.9	1-gang	2 modules	2CLA227190N1001	20

Mounting plate for European box with clamps

For horizontal and vertical installation.
To be installed with frames code: N2171, N227X, N227X.1 and N227X.44. Mounting plate suitable for 60 mm screw distance boxes.
With aligning flaps for multigang frames.
Included: fixing claws.

Type	Size	Modules	Order code	Qty.*
N2271.9 G	1-gang	2 modules	2CLA227191N1001	20

Mounting plate for European box

For horizontal installation.
To be installed with frames code:
- N2272: 1x N2272.9.
- N2273: 1x N2272.9 + 1x N2271.9.
- N2274: 2x N2272.9.
- N2275: 2x N2272.9 + 1x N2271.9.

Mounting plate suitable for 60 mm screw distance boxes.
With aligning flaps for multigang frames.

Type	Size	Modules	Order code	Qty.*
N2272.9	2-gang	2+2 modules	2CLA227290N1001	20

Mounting plate for European box

For horizontal installation.
To be installed with frames code:
- N2273: 1x N2273.9
- N2274: 1x N2273.9 + 1x N2271.9.
- N2275: 1x N2273.9 + 1x N2272.9.

Mounting plate suitable for 60 mm screw distance boxes. With aligning flaps for multigang frames.

Type	Size	Modules	Order code	Qty.*
N2273.9	3-gang	2+2+2 modules	2CLA227390N1001	20

Device protector

Protector plastic to protect devices while painting. For mounting plates code: N2271.9.

Type	Order code	Qty.*
N2271.94	2CLA227194N1001	20

Zenit R

Mounting plates for Zenit R Solid and Zenit R Float frames

Mounting plate for 3 module box - Vertical

Mounting plate that facilitates the assembly of 1 and 2 module devices in vertical installations.
To be installed with frames code: N2472, N2371.1V and N2372.1.
Mounting plate suitable for 83,5 mm screw distance boxes.

Type	Size	Modules	Order code	Qty.*
N2371.9V	3M	2 modules	2CLA237190N1002	20

Mounting plate for 3 module box

For horizontal and vertical installation of 1, 2 or 3 module devices.
To be installed with frames code: N2471, N2471.1, N2472, N2472.1, N2472.2,N
N2472.3, N2473, N2473.1,
N2370.1, N2371.1, N2372.1, N2372.2 and N2373.1.
Mounting plate suitable for 83,5 mm screw distance boxes.

Type	Size	Modules	Order code	Qty.*
N2473.9	3M	3 modules	2CLA247390N1001	20

Mounting plate for 3 module box with screws

For horizontal and vertical installation of 1, 2 or 3 module devices.
To be installed with frames code: N2471, N2471.1, N2472, N2472.1, N2472.2,N
N2472.3, N2473, N2473.1,
N2370.1, N2371.1, N2372.1, N2372.2 and N2373.1.
Mounting plate suitable for 83,5 mm screw distance boxes.
Included: 2 screws to fix the mounting plate.

Type	Size	Modules	Order code	Qty.*
N2473.91	3M	3 modules	2CLA247391N1001	20

Mounting plate for 4 module box

For horizontal and vertical installation of 1, 2 or 3 module devices.
To be installed with frames code: N2474 and N2374.1.
Mounting plate suitable for 107 mm screw distance boxes.

Type	Size	Modules	Order code	Qty.*
N2474.9	4M	4 modules	2CLA247391N1001	20

Mounting plate for 4 module box with screws

For horizontal and vertical installation of 1, 2 or 3 module devices. To be installed with frames code: N2474 and N2374.1.
Mounting plate suitable for 107 mm screw distance boxes. Included: 2 screws to fix the mounting plate.

Type	Size	Modules	Order code	Qty.*
N2474.91	4M	4 modules	2CLA247491N1001	20

Mounting plate for 7 module box

For horizontal and vertical installation of 1, 2 or 3 module devices.
To be installed with frames code: N2777 and N2777.1.
Mounting plate suitable for 100 mm screw distance boxes.

Type	Size	Modules	Order code	Qty.*
N2777.9	7M	7 modules	2CLA277790N1001	20

Mounting plate for 7 module box with screws

For horizontal and vertical installation of 1, 2 or 3 module devices. To be installed with frames code: N2777 and N2777.1.
Mounting plate suitable for 100 mm screw distance boxes. Included: 4 screws to fix the mounting plate.

Type	Size	Modules	Order code	Qty.*
N2777.91	7M	7 modules	2CLA277791N1001	20

Mounting plate for 4”x 4” box

For horizontal and vertical installation of 1, 2 or 3 module devices.
To be installed with frames code: N2670, N2671.1, N2672.2, N2672.4 and N2673.6.
Mounting plate suitable for 4”x4” boxes.

Type	Size	Modules	Order code	Qty.*
N2673.9	4”x 4”	3+3 modules	2CLA267390N1001	10

Solutions for all type of installations

Zenit boxes and frames for flush and surface mounting.
Seven options that cover any need in flush, surface, narrow, enclousure and/or all weather installations.

IP20 surface mounting boxes:
- 1 and 2-gang frame and boxes with 1, 1+1 and 2 modules space.
- Protection degree: IP20.
- Color: White, Dune, Silver, Anthracite and Matt Black.
- Perfect solution for reduced dimensions surfaces as plastic and metallic profiles or screens.

IP40 surface mounting boxes:
- 1-gang boxes with 2, 3, 4 and 6 modules space.
- Protection degree: IP40.
- Color: White, Dune, Silver, Anthracite and Matt Black.
- Perfect solution for indoor surface installations integrated with the decoration of the room like lofts or restaurants or requiring a higher level of protection like parkings, stadiums, etc.

IP55 surface mounting boxes:
- 1, 2 and 3-gang boxes with 2, 3, 2+2 and 2+2+2 modules space.
- Protection degree: IP55.
- Color: Gray RAL 7035.
- The box has a cover with a transparent elastic membrane that allows direct control of the switch and a comfortable opening angle of 120°.

IP55 flush mounting frames:
- 1 and 2-gang boxes with 2, 3 and 2+2 modules space.
- Protection degree: IP55
- Color: White, Gray RAL 7035 and Anthracite
- The frame has a cover with a transparent elastic membrane that allows direct control of the switch and a comfortable opening angle of 120°.

Zenit

IP44 frames for flush mounting

Frame for flush mounting - IP44



Frames for IP44 flush mounted installations.
For 1 o r 2 module devices.
Size (height x width):
- N2271.44: 85 x 85 mm.
- N2272.44: 85 x 1 56 mm.
- N2273.44: 85 x 227 mm.

Protection degree: IP44 in combination with N2101.x, N2102.x, N211 0.x, N2201.x, N2202.x, N2210.x switches, N2104.x, N2204.x pushbuttons and N2288.1 socket outlets.
IP44 certificate valid for:
- Mounting on smooth walls.
- Socket outlet with lid closed.

Mounting plate code suitable for 60mm screw distance boxes: N2271.9x.

White

Type	Size	Modules	Order code	Qty.*
N2271.44 BL	1-gang	2	2CLA227144N1101	1
N2272.44 BL	2-gang	2+2	2CLA227244N1101	1
N2273.44 BL	3-gang	2+2+2	2CLA227344N1101	1

Dune

Type	Size	Modules	Order code	Qty.*
N2271.44 DN	1-gang	2	2CLA227144N6201	1
N2272.44 DN	2-gang	2+2	2CLA227244N6201	1
N2273.44 DN	3-gang	2+2+2	2CLA227344N6201	1

Matt Black

Type	Size	Modules	Order code	Qty.*
N2271.44 NT	1-gang	2	2CLA227144N1501	1
N2272.44 NT	2-gang	2+2	2CLA227244N1501	1
N2273.44 NT	3-gang	2+2+2	2CLA227344N1501	1

Anthracite

Type	Size	Modules	Order code	Qty.*
N2271.44 AN	1-gang	2	2CLA227144N1801	1
N2272.44 AN	2-gang	2+2	2CLA227244N1801	1
N227.44 AN	3-gang	2+2+2	2CLA227344N1801	1

Silver

Type	Size	Modules	Order code	Qty.*
N2271.44 PL	1-gang	2	2CLA227144N1301	1
N2272.44 PL	2-gang	2+2	2CLA227244N1301	1
N2273.44 PL	3-gang	2+2+2	2CLA227344N1301	1

IP40 surface mounting boxes

Surface mounting box - IP40

Box for surface installation.
The box includes the clipping system to clasp inserts and the frame (no mounting plate, nor frame are necessary).
Included: frame - 2 modules
Size (Width x Height x Depth):
- N2291: 64 x 70 x 47 mm.
- N2393: 86 x 70 x 47 mm.
- N2494: 108 x 70 x 47 mm.
- N2696: 152 x 70 x 47 mm.

Pre-cut areas in the 4 sides for N2999 adapters.

White

Type	Size	Modules	Order code	Qty.*
N2291 BL	1-gang	2	2CLA229100N1101	5
N2393 BL	1-gang	3	2CLA239300N1101	5
N2494 BL	1-gang	4	2CLA249400N1101	5
N2696 BL	1-gang	6	2CLA269600N1101	5

Dune

Type	Size	Modules	Order code	Qty.*
N2291 DN	1-gang	2	2CLA229100N6201	5
N2393 DN	1-gang	3	2CLA239300N6201	5
N2494 DN	1-gang	4	2CLA249400N6201	5
N2696 DN	1-gang	6	2CLA269600N6201	5

Matt Black

Type	Size	Modules	Order code	Qty.*
N2291 NT	1-gang	2	2CLA229100N1501	5
N2393 NT	1-gang	3	2CLA239300N1501	5
N2494 NT	1-gang	4	2CLA249400N1501	5
N2696 NT	1-gang	6	2CLA269600N1501	5

Anthracite

Type	Size	Modules	Order code	Qty.*
N2291 AN	1-gang	2	2CLA229100N1801	5
N2393 AN	1-gang	3	2CLA239300N1801	5
N2494 AN	1-gang	4	2CLA249400N1801	5
N2696 AN	1-gang	6	2CLA269600N1801	5

Silver

Type	Size	Modules	Order code	Qty.*
N2291 PL	1-gang	2	2CLA229100N1301	5
N2393 PL	1-gang	3	2CLA239300N1301	5
N2494 PL	1-gang	4	2CLA249400N1301	5
N2696 PL	1-gang	6	2CLA269600N1301	5

Zenit

IP55 frames for flush mounting

Flush mounting frames - IP55

Frames for IP55 flush mounted installations.
Size (height x width):
- N3271: 90 x 90 mm.
- N3272: 161 x 90 mm.
- N3373: 90 x 122 mm.

Mounting plate included.
Protection degree: IP55 (with lid closed).
Opening angle of the lid: 120°.
The lid allows operating the switch in closed position.
N3271 and N3272 suitable for 60 mm screw distance boxes and 1 or 2 module devices.
N3373 suitable for 83,5 mm screw distance boxes and 1,2 or 3 module devices.

White

Type	Size	Modules	Order code	Qty.*
N3271 BL	1-gang	2	2CLA327100N1101	10
N3272 BL	2-gang	2+2	2CLA327200N1101	5
N3373 BL	3M	3	2CLA337300N1101	5

Grey

Type	Size	Modules	Order code	Qty.*
N3271 GR	1-gang	2	2CLA327100N1701	10
N3272 GR	2-gang	2+2	2CLA327200N1701	5
N3373 GR	3M	3	2CLA337300N1701	5

Anthracite

Type	Size	Modules	Order code	Qty.*
N3271 AN	1-gang	2	2CLA327100N1801	10
N3272 AN	2-gang	2+2	2CLA327200N1801	5
N3373 AN	3M	3	2CLA337300N1801	5

IP55 surface mounting boxes

Surface mounting box - IP55



Box for IP55 surface mounted installations.
For 1 or 2 module devices.
Size (height x width x depth):
- N3291: 80 x 65 x 63 mm
- N3292: 80 x 130 x 63 mm.
- N3293: 80 x 195 x 63 mm.
- N3391: 80 x 104 x 63 mm.

Color: gray RAL 7035
Protection degree: IP55 (with lid closed).
Opening angle of the lid: 120°.
The lid allows operating the switch in closed position.
Incoming with multi-diameter cone for tubes/cables max. Ø20.
The box includes the clipping system to clasp inserts (no mounting plate, nor frame are necessary).
N3291, N3292 and N3293 suitable for 1 or 2 module devices. N3391 suitable for 1,2 or 3 module devices.

Grey

Type	Size	Modules	Order code	Qty.*
N3291	1-gang	2	2CLA329100N1101	10
N3292	2-gang	2+2	2CLA329200N1101	10
N3293	3-gang	2+2+2	2CLA329300N1101	5
N3391	3M	3	2CLA339100N1101	10

Zenit

Frames for metallic and plastic profiles

Frame for metallic and plastic profiles

Frames suitable to be installed in reduced dimensions surfaces as plastic and metallic profiles or screens.
For 1 module devices:
- N2671:
- Size (width x height): 32 x 68 mm.
- Shaft size (width x height): 26 x 50 mm.
- N2671.2:
- Size (width x height): 32 x 126 mm.
- Shaft size (width x height): 26 x 108 mm.
For 1 and 2 module devices:
- N2672:
- Size (width x height): 54 x 68 mm.
- Shaft size (width x height): 49 x 50 mm.

White

Type	Size	Modules	Order code	Qty.*
N2671 BL	1-gang	1	2CLA267100N1101	10
N2671.2 BL	2-gang	1+1	2CLA267120N1101	5
N2672 BL	1-gang	2	2CLA267200N1101	6

Dune

Type	Size	Modules	Order code	Qty.*
N2671 DN	1-gang	1	2CLA267100N6201	10
N2671.2 DN	2-gang	1+1	2CLA267120N6201	5
N2672 DN	1-gang	2	2CLA267200N6201	6

Matt Black

Type	Size	Modules	Order code	Qty.*
N2671 NT	1-gang	1	2CLA267100N1501	10
N2671.2 NT	2-gang	1+1	2CLA267120N1501	5
N2672 NT	1-gang	2	2CLA267200N1501	6

Anthracite

Type	Size	Modules	Order code	Qty.*
N2671 AN	1-gang	1	2CLA267100N1801	10
N2671.2 AN	2-gang	1+1	2CLA267120N1801	5
N2672 AN	1-gang	2	2CLA267200N1801	6

Silver

Type	Size	Modules	Order code	Qty.*
N2671 PL	1-gang	1	2CLA267100N1301	10
N2671.2 PL	2-gang	1+1	2CLA267120N1301	5
N2672 PL	1-gang	2	2CLA267200N1301	6

Mounting plate for DIN-rail

Adapter for DIN rail - 2M

Adapter that facilitates the intallation of Zenit devices up to 2 modules in switchboards on DIN rails.
RAL 9010.
Width: 53,5 mm.

Type	Size	Modules	Order code	Qty.*
N2692 BL	1-gang	2	2CLA269200N1101	10

Flush mounting boxes

Flush mounting box - Bricks and cement

Installation box for walls built with bricks or cement.
- 1199: box for 60 mm screw distance mounting plates (N2271.9, N2271.9G, N2272.9, N2273.9, Z2271.9, Z2271.93, Z2271.96 & Z2271.97). Allows the input of 2 tubes per each side. Linkable for multigang frames. Includes 2 screws to fix the mounting plate. The screws can be placed in any of the 4 sides to facilitate the installation of the insert in vertical and horizontal.
- 499.3: box for 83,5 mm distance mounting plates (N2371.9V, N2473.9, Z2372.9 & Z2373.91).
- M000530000: box for 107 mm distance mounting plates (N2474.9 & Z2474.91).

Type	Size	Modules	Order code	Qty.*
1199	1-gang	2 modules	2CLA019900A1001	250
499.3	3M	3 modules	2CLA049930A1001	25
499.3	4M	4 modules	2CLA049940A1001	20

Zenit centralizations and workstations

Cutting-edge connectivity

Zenit centralizations and workstations is a complete range of electrical and multimedia connectivity systems that allow the electrification of both, spaces and furniture, with solutions for flush or surface installations. With all the guarantee and care design that you can expect from our brand, and with important advances to facilitate and make this type of installations more comfortable.

Systems for centralized controls

The systems for centralized control of Zenit are oriented to respond to the needs generated in facilities of the tertiary sector (offices, shops, hotels, auditoriums, etc.).
This system serves to centralize the control of different lights, blinds or equipment in a single box, in a single control point.

Better aesthetics outside, more comfort inside
The Zenit control centralizations can be installed in both, surface and flush mounted boxes.

Plates with four finishes that perfectly combine with all the functionalities offered by Zenit:
- **BL:** White plate and trim.
- **BP:** White plate / Silver trim.
- **PL:** Silver plate and trim.
- **AN:** Anthracite plate and trim.

Also the surface boxes are available in the finishes White, Silver and Anthracite.

In most of the tertiary installations, a place to centralize the control of the various lights shutters, boilers, etc. is always required.

The systems for centralized control of Zenit allows to group all these functions in a single box using the covers and inserts of **most complete modular range of the market: Zenit.**
With Zenit centralization systems **you can cover all the installation needs** that can arise in this type of premises, from the simplest up to the KNX functions (motion detection, thermostat, lighting control, blinds, etc.), as well as electronic functions as sound systems, dimming, door bell, room temperature control, timer, etc.

—
Surface mounted box

—
Flush mounted box

Better aesthetics outside and greater comfort inside

Zenit systems for centralized controls allow you to integrate in a single system all functions that an installation may need. All this thanks to having the most complete modular range. A range of appreciated design and beautiful finishes that add value to the installations, with advanced functions that bring greater comfort and level of performance. With 1 module (N2100) or 2 module (N2200) inserts, you can distribute freely with 3 size options:

- **2-gang:** for 12 one module inserts or 6 two module inserts.
- **3-gang:** for 18 one module inserts or 9 two module inserts.
- **4-gang:** for 24 one module inserts or 12 two module inserts.

The Zenit systems for centralized controls, as wel as Zenit Workstations, incorporate the renowned tilting system that simplifies the installation work to professionals. Allows each window to be tilted, opening it to the right or left. This greatly facilitates the work of connecting or exchanging the inserts, as it does not force you to work inside the box, but comfortably out of it. Once the connections have been made, with all the facilities offered by the Zenit modular inserts, it will be enough to replace the tilted window in its place by simply pressing on the end until you hear a “click”. The tilting supports are made of metal to give to the centralization the maximum strength and resistance, and thus guarantee its durability over time regardless of the number of times times it is necessary to change its configuration.

Each window includes a comfortable and functional labeling area in its upper part that will allow the end user to identify the function associated to the insert on which it is located. In addition, Zenit Centralizations offer all kinds of advantages to make the installation simpler and easier (adaptable to any type of wall, flush-mounted boxes with independent frames, systems of comfortable bonding, plates that are mounted by cliping).

Zenit systems for centralized controls

Surface mounted centralizations

Surface mounted box with mounting plate + plate with trim + Zenit inserts

Selection table	12 modules	18 modules	24 modules
Surface mounting box	T1292 XX	T1293 XX	T1294 XX
Plate	T1272 XX	T1273 XX	T1274 XX
Insert	Zenit	Zenit	Zenit

Flush mounted centralizations

Flush mounted box with mounting plate + plate with trim + Zenit inserts

Selection table	12 modules	18 modules	24 modules
Flush mounting box	T1092.1	T1093.1	T1094.1
Plate	T1272 XX	T1273 XX	T1274 XX
Inserts	Zenit	Zenit	Zenit

Zenit - centralizations

Surface mounting boxes

Surface mounting box - 12 modules

Zenit centralization box for surface mounted installations.
2-gang - 6+6 modules.
For 1, 2 or 3 module devices.
Size (height x width x depth): 204 x 212 x 55 mm.
Included:
- Metallic mounting plates (horizontally folding for easy installation).
- Screws.
- Plugs.
Suitable for frames code: T1272.

Colour	Type	Order code	Size	Qty.*
White	**T1292 BL**	2CLA129200T1001	-	1
Silver	**T1292 PL**	2CLA129200T1301	-	1
Anthracite	**T1292 AN**	2CLA129200T1801	-	1

Surface mounting box - 18 modules

Zenit centralization box for surface mounted installations.
3-gang - 6+6+6 modules.
For 1, 2 or 3 module devices.
Size (height x width x depth): 275 x 212 x 55 mm
Included:
- Metallic mounting plates (horizontally folding for easy installation).
- Screws.
- Plugs.
Suitable for frames code: T1273.

Colour	Type	Order code	Size	Qty.*
White	**T1293 BL**	2CLA129300T1001	-	1
Silver	**T1293 PL**	2CLA129300T1301	-	1
Anthracite	**T1293 AN**	2CLA129300T1801	-	1

Surface mounting box - 24 modules

Zenit centralization box for surface mounted installations.
4-gang - 6+6+6+6 modules.
For 1, 2 or 3 module devices.
Size (height x width x depth): 346 x 212 x 55 mm
Included:
- Metallic mounting plates (horizontally folding for easy installation).
- Screws.
- Plugs.
Suitable for frames code: T1274.

Colour	Type	Order code	Size	Qty.*
White	**T1294 BL**	2CLA129400T1001	-	1
Silver	**T1294 PL**	2CLA129400T1301	-	1
Anthracite	**T1294 AN**	2CLA129400T1801	-	1

Flush mounting boxes

Flush mounting box - 12 modules



Zenit centralization box for flush mounted installations.
2-gang - 6+6 modules.
For 1, 2 or 3 module devices.
Size (height x width x depth): 178 x 186 x 55 mm
Included:
- Metallic mounting plates (horizontally folding for easy installation).
- multi-box linking accessories.
- Screws.
- Plugs.
- Claws for drywall.
Suitable for frames code: T1272.

Colour	Type	Order code	Size	Qty.*
-	**T1092.1**	2CLA109210T1001	-	1

Flush mounting box - 18 modules

Zenit centralization box for flush mounted installations.
3-gang - 6+6+6 modules.
For 1, 2 or 3 module devices.
Size (height x width x depth): 249 x 186 x 55 mm
Included:
- Metallic mounting plates (horizontally folding for easy installation).
- multi-box linking accessories.
- Screws.
- Plugs.
- Claws for drywall.
Suitable for frames code: T1273.

Colour	Type	Order code	Size	Qty.*
-	**T1093.1**	2CLA109310T1001	-	1

Flush mounting box - 24 modules

Zenit centralization box for flush mounted installations.
4-gang - 6+6+6+6 modules.
For 1, 2 or 3 module devices.
Size (height x width x depth): 320 x 186 x 55 mm
Included:
- Metallic mounting plates (horizontally folding for easy installation).
- multi-box linking accessories.
- Screws.
- Plugs.
- Claws for drywall.
Suitable for frames code: T1274.

Colour	Type	Order code	Size	Qty.*
-	**T1094.1**	2CLA109410T1001	-	1

Zenit - centralizations

Frames

Frame for centralizations - 12 modules

Color:
- BL: White plate / White frame.
- BP: White plate / Silver frame.
- PL: Silver plate / Silver frame.
- AN: Anthracite plate / Anthracite frame.

Zenit centralization frames for flush mounting boxes code T1092.1 and surface mounting boxes code T1292.
2-gang - 6+6 modules.
For 1, 2 or 3 module devices.
With labeling space.
Size (height x width): 204 x 212 mm.

Colour	Type	Order code	Size	Qty.*
White/White	**T1272 BL**	2CLA127200T1101	-	1
White/Silver	**T1272 BP**	2CLA127200T1201	-	1
Silver	**T1272 PL**	2CLA127200T1301	-	1
Anthracite	**T1272 AN**	2CLA127200T1801	-	1

Frame for centralizations - 18 modules

Color:
- BL: White plate / White frame.
- BP: White plate / Silver frame.
- PL: Silver plate / Silver frame.
- AN: Anthracite plate / Anthracite frame.

Zenit centralization frames for flush mounting boxes code T1093.1 and surface mounting boxes code T1293.
4-gang - 6+6+6 modules.
For 1, 2 or 3 module devices.
With labeling space.
Size (height x width): 275 x 212 mm.

Colour	Type	Order code	Size	Qty.*
White/White	**T1273 BL**	2CLA127300T1101	-	1
White/Silver	**T1273 BP**	2CLA127300T1201	-	1
Silver	**T1273 PL**	2CLA127300T1301	-	1
Anthracite	**T1273 AN**	2CLA127300T1801	-	1

Frame for centralizations - 24 modules

Color:
- BL: White plate / White frame.
- BP: White plate / Silver frame.
- PL: Silver plate / Silver frame.
- AN: Anthracite plate / Anthracite frame.

Zenit centralization frames for flush mounting boxes code T1094.1 and surface mounting boxes code T1294.
4-gang - 6+6+6+6 modules.
For 1, 2 or 3 module devices.
With labeling space.
Size (height x width): 346 x 212 mm.

Colour	Type	Order code	Size	Qty.*
White/White	**T1274 BL**	2CLA127400T1101	-	1
White/Silver	**T1274 BP**	2CLA127400T1201	-	1
Silver	**T1274 PL**	2CLA127400T1301	-	1
Anthracite	**T1274 AN**	2CLA127400T1801	-	1

Systems for workstations

In an office the number of workplaces that require being connected to computers and multimedia equipment is increasing. This system makes it possible to group all together the needs of a working place (electrical outlets, telephone, data, protection and multimedia) in a single box.

Solutions to simplify your work
Standard configuration including 4 double modules consisting of:
- 4 stadard duplex Schuko socket outlets,
- 2 UPS duplex Schuko socket outlets,
- 1 quadruple adapter for telephone or data connectors

Finishes suiting to each workspace
The Zenit workstations are available in three finishes:
- **BL:** White plate and trim
- **PL:** Silver plate and trim
- **TT:** White plate / Titanium metallic trim

Also the surface boxes are available in the finishes White and Silver.

—
Special kit that incorporates standard mechanisms

Professional solutions, solutions as a whole
The Zenit systems for workstations allow to group all the needs of a job in a single box, that can be:
- **Surface mounted box,** to be installed with pipe or trunking inlet.
- **Flush mounted box,** for brick walls or drywalls.
- **Floor box,** for traditional or concrete floors, as well as raised or technical floors.

With different options of measurement and capacity, **in order to provide the necessary flexibility in each workstation. And the duplex inserts, for sockets, voice and data,** specially designed for these boxes, being the most used insert type in this kind of installations.

The maximum simplicity and comfort in the installation

The Zenit workstations have been meticulously designed with innovative breakthroughs, devised to solve in the most comfortable, quick and easy way any installation.

- **1** In addition to the usual cutouts for the drill, the base has flexible flaps for a correct adaptation to non homogeneous, rough or imperfect walls. It is also equiped with holes arranged horizontally and vertically, to be able to level the box in both directions.
- **2** The bottom has a removable lid with several cutouts for different trunking dimensions.
- **3** Guides at the upper and lower ends facilitate the placement of a metal separator to avoid interferences between power and voice/data lines.

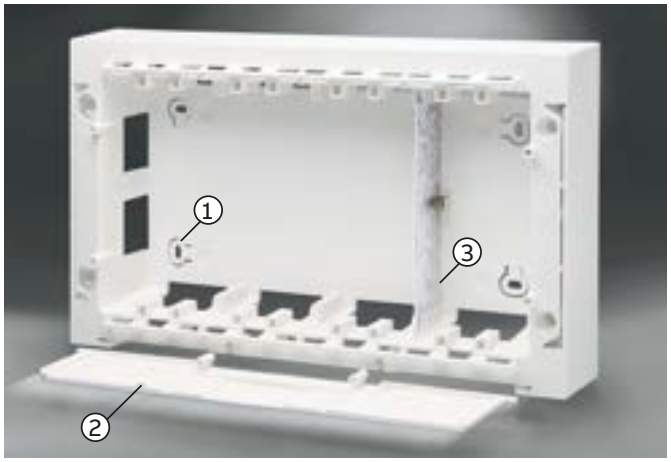

- At the rear the box has a large peripheral space to guide the cables comfortably.
- With multiple cable entries on all sides for easy access to all inserts.

The boxes are linked in a very simple way: the side is cut with scissors, the connection pieces that the box has inside are rotated and these are joined to the other box by simple pressure. This provides a perfect connection that does not alter the design of the box. (Figure 1).



—
Figure 1

—
Figure 2

- To facilitate the alignment of the mounting plates, we include an accessory that joins and pairs the ends of the plates while screwing them. (Figure 2).

The boxes are linked very simply with two pieces that serve for the passage of the wiring and to keep them well aligned. (Figure 3).

—
Figure 3

—
Figure 4

- The flush mounted box offers multiple tube or pipe inlets on all sides.
- It also has tabs that allow its correct adjustment in plasterboard partitions or drywalls. (Figure 4)

The mounting plate that holds the inserts is independent of the box. This offers two clear advantages to get a good finish without any problem:

- When screwing the mounting plate into the flush mounted box, the screw holes allow the frame to be rotated so that the frame is always straight, even if the flush-mounted box is not.
- In addition, the independent mounting plate rests on the wall and not on the box, which ensures that the outer bezel always fits well, even if the box is not perfectly scratched.

- **1** The embellishing cover and the frame (white or colored) are fixed by pressure, both to the mounting plate and to the box, without using any tool.
- **2** The frame offer easily removable slide-in tags that allow you to insert the labels included with the frame or any necessary description.
- **3** The socket outlets are positioned tilted to facilitate the use ofbulky plugs or chargers.
- **4** In addition to the duplex inserts created especially for the workstations, the system has a double adapter that allows to incorporate any modular 1 or 2 module insert of the Zenit range.
- **5** The voice and data connectors are hidden behind a protective shutter that prevents dirt from entering them.

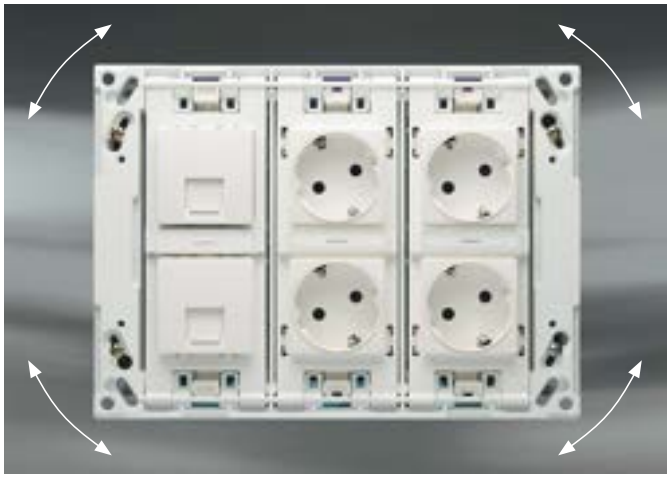

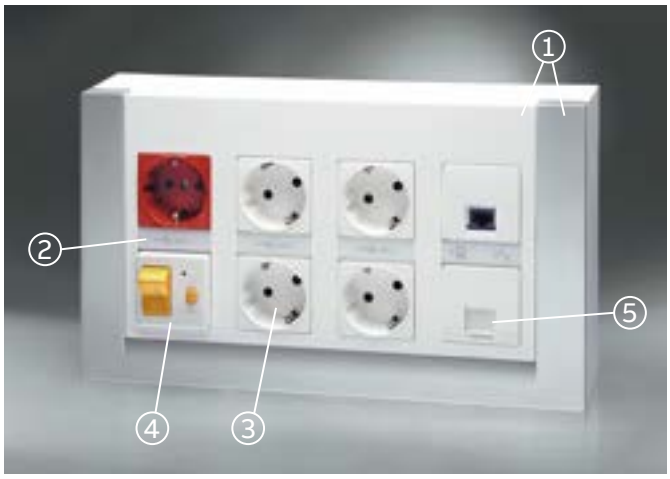

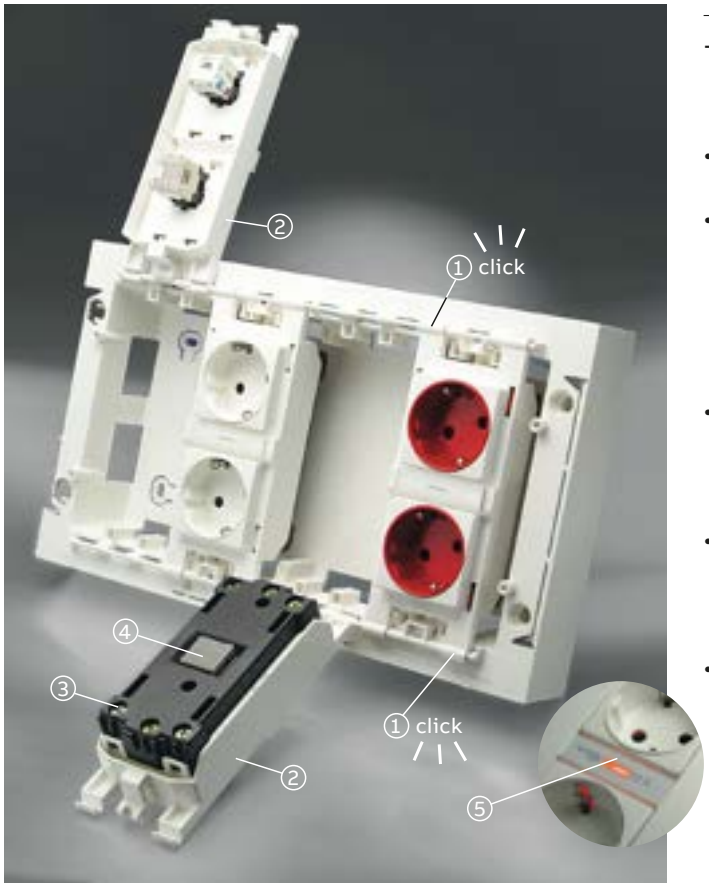

Thus, work is much easier

- **1** The inserts are installed by clipping, simply by pressing on the top and bottom of them.
- **2** The great advantage for the installation is that, in order to facilitate its connection as much as possible, the inserts swing very easily in both directions (up and down). This allows you to work comfortably outside the box and, once the connections have been finished, reposition them in place by clicking on the bracket.
- **3** The screws of the socket outlets are located at the rear for easier tightening. In addition in the duplex socket outlets it is only necessary to connect on one side, which reduces the time of wiring in half.
- **4** Thanks to this innovative tilting system, the voltage indicator lamp can also be easily replaced by pressure and without the need for additional cables or connections at the rear of the inserts.
- **5** When placing the lamp on a duplex Schuko socket outlet or a duplex French/earth-pin socket outlet the sign is illuminated, which allows to easily identify if there is power supply at that point.

Zenit systems for workstations

Surface mounted workstations for walls and furniture

Surface mounted box with mounting plate + plate with trim + inserts

Selection table	3 columns	4 columns	5 columns
Surface mounting box	T1193 XX	T1194 XX	T1195 XX
Plate	T1173 XX	T1174 XX	T1175 XX
Insert	T1088 XX, T1087, T1018.X	T1088 XX, T1087 RJ, T1018.X	T1088 XX, T1087 RJ, T1018.X
Fordable lid (optional)	T1173.5	T1174.5	T1175.5

Flush mounted workstations for walls and furniture



Flush mounted box with mounting plate + plate with trim + inserts

Selection table	3 columns	4 columns
Flush mounting box	T1093	T1094
Plate	T1173 XX	T1174 XX
Insert	T1088 XX, T1087 RJ, T1018.X	T1088 XX, T1087 RJ, T1018.X
Fordable lid (optional)	T1173.5	T1174.5

Flush mounted workstations for floors

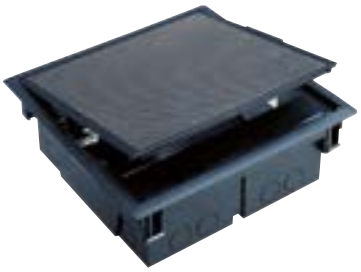

Floor box + plate with mounting plate + inserts

Selection table	3 columns
Floor box	T1393, T1393.1
Plate	T1373
Inserts	T1088 XX, T1087 RJ, T1018.X
Metal box for traditional/concrete floor (optional)	T1393.9

Application examples for workstations

- **Workstation for wall or furniture**
- **Surface mounted**
- **With Zenit's MCB and RCD protection insert**

Workstation with 4 columns (Silver) with 3 standard Schuko socket outlets, 2 red for UPS and one support for 4 data/ telephone connectors. Composition:

Description	Code
Surface mounting box with mounting plate Silver	T1194 PL
Plate with trim Silver	T1174 PL
Duplex Schuko socket outlet Silver	T1088 PL
Duplex Schuko socket outlet Silver-Red	T1088 RP
Support for 4 data/telephone connectors Silver	T1016.4 BL
Adaptor for Zenit modular inserts	T1000
Zenit Schuko socket outlet Silver	N2288 PL
Zenit MCB (10A)+ RCD (10mA) protection device Silver	N2234.2 PL

- **Workstation for wall or furniture**
- **Flush mounted**
- **With data and telephone connectors**

Workstation with 3 columns (White) with fordable lid, 2 standard duplex Schuko socket outlets, 2 red for UPS, one telephone outlet and data outlet CAT5e UTP. Composition:

Description	Code
Flush mounting box with mounting plate	T1093
Plate with trim White	T1173 BL
Fordable lid	T1173.5
Duplex Schuko socket outlet White	T1088 BL
Duplex Schuko socket outlet Red	T1088 RJ
Adaptor for Zenit modular inserts	T1000
Zenit RJ12 telephone outlet	2017.2
Zenit RJ45 CAT5e UTP data outlet	2018.5
Zenit 1-gang cover plate for telephone and data outlets White	N2218.1 BL (2 units)

- **Workstation for floor installation**
- **With Schuko socket outlets and data connectors**

Workstation with 3 columns, 1 standard duplex Schuko socket outlet, 1 red for UPS, one fiber optic outlet and data outlet CAT6A STP. Composition:

Description	Code
Floor box with stainless steel lid	T1393.1
Plate with mounting plate	T1373
Duplex Schuko socket outlet White	T1088 BL
Duplex Schuko socket outlet Red	T1088 RJ
Support for 2 data/telephone connectors Silver	T1016.2
Zenit fiber optic outlet	2016.9
Zenit RJ45 CAT6A STP	2016.65

Zenit - workstations

Surface mounting boxes

Surface mounting box - 2, 3, 4 and 5 columns

BBox for surface mounted installations.
- 2 columns:
- 2+2+2+2 modules.
- Size (height x width x depth): 176 x 175 x 45 mm.
- Suitable for frames code: T1172.
- 3 columns:
- 2+2+2+2+2+2 modules.
- Size (height x width x depth): 176 x 235 x 45 mm.
- Suitable for frames code: T1173.
- 4 columns:
- 2+2+2+2+2+2+2+2 modules.
- Size (height x width x depth): 176 x 295 x 45 mm.
- Suitable for frames code: T1174.
- 5 columns:
- 2+2+2+2+2+2+2+2+2+2 modules.
- Size (height x width x depth): 176 x 355 x 45 mm
- Suitable for frames code: T1175.

For 1 or 2 module devices. Also suitable for T10XX devices.
Included:
- Mounting plates (vertically folding devices for easy installation)
- Multi-box linking accessories
- Screws
- Plugs
- Side cover for trunking system incoming and isolating metallic plate to divide power from VDI.

Colour	Size	Type	Order code	Qty.*
White	2 columns	**T1192 BL**	2CLA119200T1001	1
Silver	2 columns	**T1192 PL**	2CLA119200T1301	1
White	3 columns	**T1193 BL**	2CLA119300T1001	1
Silver	3 columns	**T1193 PL**	2CLA119300T1301	1
White	4 columns	**T1194 BL**	2CLA119400T1001	1
Silver	4 columns	**T1194 PL**	2CLA119400T1301	1
White	5 columns	**T1195 BL**	2CLA119500T1001	1
Silver	5 columns	**T1195 PL**	2CLA119500T1301	1

Flush mounting boxes

Flush mounting box - 2 columns

Box for flush mounted installations.
- 2 columns:
- 2+2+2+2 modules.
- Size (height x width x depth): 150 x 151 x 45 mm
- Suitable for frames code: T1172.
- 3 columns:
- 2+2+2+2+2+2 modules.
- Size (height x width x depth): 150 x 211 x 45 mm
- Suitable for frames code: T1173.
- 4 columns:
- 2+2+2+2+2+2+2+2 modules.
- Size (height x width x depth): 150 x 271 x 45 mm
- Suitable for frames code: T1174.

For 1 or 2 module devices. Also suitable for T10XX devices.
Included:
- Mounting plates
(vertically folding devices for easy installation)
- Multi-box linking accessories
- Screws
- Plugs
- isolating metallic plate to divide power from VDI and claws for drywall.

Colour	Size	Type	Order code	Qty.*
Blue	2 columns	**T1092**	2CLA109200T1001	1
Blue	3 columns	**T1093**	2CLA109300T1001	1
Blue	4 columns	**T1094**	2CLA109400T1001	1

Zenit - workstations

Frames

Frame for workstations - 2 columns

Color:
- BL: White plate / White frame
- PL: Silver plate / Silver frame
- TT: White plate / Titanium metallic frame

Zenit workstation frames for flush mounting boxes code
T1092 and surface mounting boxes code T1192.
2-columns - 4-gang - 2+2+2+2 modules.
For 1 or 2 module devices. Also suitable for T10XX devices. Size (height x width): 176x 175 mm.

Colour	Type	Order code	Size	Qty.*
White	**T1172 BL**	2CLA117200T1101	-	1
Silver	**T1172 PL**	2CLA117200T1301	-	1

Frame for workstations - 3 columns

Color:
- BL: White plate / White frame
- PL: Silver plate / Silver frame
- TT: White plate / Titanium metallic frame

Zenit workstation frames for flush mounting boxes code T1093 and surface mounting boxes code T1193.
3-columns - 6-gang - 2+2+2+2+2+2 modules.
For 1 or 2 module devices. Also suitable for T10XX devices. Size (height x width): 176x 235 mm.

Colour	Type	Order code	Size	Qty.*
White	**T1173 BL**	2CLA117300T1101	-	1
Silver	**T1173 PL**	2CLA117300T1301	-	1

Frame for workstations - 4 columns

Color:
- BL: White plate / White frame
- PL: Silver plate / Silver frame
- TT: White plate / Titanium metallic frame

Zenit workstation frames for flush mounting boxes code T1094 and surface mounting boxes code T1194.
4-columns - 8-gang - 2+2+2+2+2+2+2+2 modules.
For 1 or 2 module devices. Also suitable for T10XX devices. Size (height x width): 176x 295 mm.

Colour	Type	Order code	Size	Qty.*
White	**T1174 BL**	2CLA117400T1101	-	1
Silver	**T1174 PL**	2CLA117400T1301	-	1

Frame for workstations - 5 columns

Color:
- BL: White plate / White frame
- PL: Silver plate / Silver frame
- TT: White plate / Titanium metallic frame

Zenit workstation frames for surface mounting boxes code T1195.
5-columns - 10-gang - 2+2+2+2+2+2+2+2+2+2 modules.
For 1 or 2 module devices. Also suitable for T10XX devices. Size (height x width): 176x 355 mm.

Colour	Type	Order code	Size	Qty.*
White	**T1175 BL**	2CLA117500T1101	-	1
Silver	**T1175 PL**	2CLA117500T1301	-	1

Duplex socket outlets

Duplex Schuko socket outlet

Rated voltage: 250 Vac.
Rated current: 16A.
Type F: 2P + E.
Shuttered for child safety.
Screw terminals (common terminal for both outlets).
Folding system for easy installation.
With labeling space.
Optional: power indicator LED lamp code: 6192.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.
Colors RJ and RP are suitable to identify special circuits.

Colour	Type	Order code	Size	Qty.*
White/White	**T1088 BL**	2CLA108800T1001	-	5
Silver/Silver	**T1088 PL**	2CLA108800T1301	-	5
White/Red	**T1088 RJ**	2CLA108800T7001	-	5
Silver/Red	**T1088 RP**	2CLA108800T7301	-	5

Duplex French/Earth-pin socket outlet

Rated voltage: 250 Vac.
Rated current: 16A.
Type E: 2P + E.
Shuttered for child safety.
Screw terminals (common terminal for both outlets).
Folding system for easy installation.
With labeling space.
Optional: power indicator LED lamp code: 6192.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.
Color RJ is suitable to identify special circuits.

Colour	Type	Order code	Size	Qty.*
White/White	**T1087 BL**	2CLA108700T1001	-	5
White/Red	**T1087 RJ**	2CLA108700T7001	-	5

Adapters

Adapter plate for ABB DIN-rail devices

1-column adapter ABB System Pro M DIN-rail devices.
2 modules.
For 1 or 2 module devices.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.

Colour	Type	Order code	Size	Qty.*
White	**T1034 BL**	2CLA103400T1001	-	10
Silver	**T1034 PL**	2CLA103400T1301	-	10

Adapter plate for Zenit devices

1-column adapter plate for Zenit devices.
2+2 modules.
For 1 or 2 module devices.
With labeling space.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.

Colour	Type	Order code	Size	Qty.*
Silver	**T1000**	2CLA100000T1001	-	10

Zenit - workstations

Adapters

2-gang plain outlet without shutter

1-column plain outlet without shutter. 2-gang.
With labeling space.
Without shutters.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.
To be used with 2016, 2016.1, 2016.2 or 2016.3 connector adapters.
Included: 2x 2016 connector adapters.

Colour	Type	Order code	Size	Qty.*
White	**T1016.1 BL**	2CLA101610T1101	-	10
Silver	**T1016.1 PL**	2CLA101610T1301	-	10

2-gang 45º outlet without shutter

1-column 45º outlet without shutter. 2-gang.
With labeling space.
Without shutters.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.
To be used with 2016, 2016.1, 2016.2 or 2016.3 connector adapters.
Included: 2x 2016 connector adapters.

Colour	Type	Order code	Size	Qty.*
White	**T1016.5 BL**	2CLA101650T1101	-	5
Silver	**T1016.5 PL**	2CLA101650T1301	-	5

4-gang plain outlet without shutter

1-column plain outlet without shutter. 4-gang.
With labeling space.
Without shutters.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.
To be used with 2016, 2016.1, 2016.2 or 2016.3 connector adapters.
Included: 4x 2016 connector adapters.

Colour	Type	Order code	Size	Qty.*
White	**T1016.2 BL**	2CLA101620T1101	-	10
Silver	**T1016.2 PL**	2CLA101620T1301	-	10

4-gang 45º outlet without shutter

1-column 45º outlet without shutter. 4-gang.
With labeling space.
Without shutters.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.
To be used with 2016, 2016.1, 2016.2 or 2016.3 connector adapters.
Included: 4x 2016 connector adapters.

Colour	Type	Order code	Size	Qty.*
White	**T1016.6 BL**	2CLA101660T1101	-	5
Silver	**T1016.6 PL**	2CLA101660T1301	-	5

2-gang plain outlet with shutter

1-column plain outlet without shutter. 2-gang.
With labeling space.
With shutters.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.
To be used with 2016, 2016.1, 2016.2 or 2016.3 connector adapters.
Included: 2x 2016 connector adapters.

Colour	Type	Order code	Size	Qty.*
White	**T1016.3 BL**	2CLA101630T1101	-	10
Silver	**T1016.3 PL**	2CLA101630T1301	-	10

2-gang 45º outlet with shutter

1-column 45º outlet without shutter. 2-gang.
With labeling space.
With shutters.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.
To be used with 2016, 2016.1, 2016.2 or 2016.3 connector adapters.
Included: 2x 2016 connector adapters.

Colour	Type	Order code	Size	Qty.*
White	**T1016.7 BL**	2CLA101670T1101	-	5
Silver	**T1016.7 PL**	2CLA101670T1301	-	5

4-gang plain outlet with shutter

1-column plain outlet without shutter. 4-gang.
With labeling space.
With shutters.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.
To be used with 2016, 2016.1, 2016.2 or 2016.3 connector adapters.
Included: 4x 2016 connector adapters.

Colour	Type	Order code	Size	Qty.*
White	**T1016.4 BL**	2CLA101640T1101	-	10
Silver	**T1016.4 PL**	2CLA101640T1301	-	10

4-gang 45º outlet with shutter

1-column 45º outlet without shutter. 4-gang.
With labeling space.
With shutters.
Suitable for boxes code T1193, T1194, T1195, T1093 and T1094 and mounting plates code T1373.
To be used with 2016, 2016.1, 2016.2 or 2016.3 connector adapters.
Included: 4x 2016 connector adapters.

Colour	Type	Order code	Size	Qty.*
White	**T1016.8 BL**	2CLA101680T1101	-	10
Silver	**T1016.8 PL**	2CLA101680T1301	-	10

Zenit - workstations

Floor boxes

Floor box - 3 columns - 5 mm. hollow lid

Floor box with 5 mm. deep hollow lid for carpet, linoleum, etc.
Protection degree:
- IP52 between the box and the floor ensured by loss-proof seal.
- IP4x at the rim of the lid.
- IP2x at the cable inlet.
Resistance of the lid: 1500 N according to DIN VDE 0364.
Resistance to chemicals present in the main detergents.
Direct installation in technical or raised floor.
Installation in tradiotional floors using the flush mounting metal box code T1393.9.
Color: dark gray RAL 7021.
Size (height x width x depth): 235 x 300 x 100 mm.
Slot size (height x width): 211 x 275 mm.
Suitable mounting plates code: T1373 and T1371.4.

Colour	Type	Order code	Size	Qty.*
Dark gray	**T1393**	M109020000	-	1

Floor box - 3 columns - Stainless steel lid

Floor box with anti-slip square patterned lid with stainless steel finish.
Protection degree:
- IP52 between the box and the floor ensured by loss-proof seal.
- IP4x at the rim of the lid.
- IP2x at the cable inlet.
Resistance of the lid: 1500 N according to DIN VDE 0364.
Resistance to chemicals present in the main detergents.
Direct installation in technical or raised floor.
Installation in tradiotional floors using the flush mounting metal box code T1393.9.
Color: dark gray RAL 7021.
Size (height x width x depth): 235 x 300 x 100 mm.
Slot size (height x width): 211 x 275 mm.
Suitable mounting plates code: T1373 and T1371.4.

Colour	Type	Order code	Size	Qty.*
Dark gray	**T1393.1**	M109030000	-	1

Flush mounting metal box

Accessory for the installation of the floor boxes code T1393 and T1393.1 in tradiotional/concrete floors.
Supplied with protection semi-lid and bunkheads for trunkings of 70x30 mm. and of 95x30 mm. and for ø 25 mm and 32 mm. conduits.
Size (height x width x depth): 230 x 305 x 105 mm.

Colour	Type	Order code	Size	Qty.*
-	**T1393.9**	M109300000	-	1

Mounting plates for floor box

Mounting plate for floor box - 3 columns

3-column adapter for the installation of Zenit devices and/or T10XX devices in floor boxes code: T1393 and T1393.1. 3-columns - 2+2+2+2+2+2 modules.
For 1 or 2 module devices. Also suitable for T10XX devices.
Included:
- Mounting plates.
- Frame.
- Screws.

Colour	Type	Order code	Size	Qty.*
White	**T1373**	2CLA137300T1101	-	20

Adapter plate for floor box - 4 modules

4 module adapter plate for the installation of Zenit devices in floor boxes code: T1393 and T1393.1.
To be combined with Zenit 4-module mounting plates code N1374.9 and frames code N2374.1.
For 1, 2 or 3 module devices.
Included: screws.

Colour	Type	Order code	Size	Qty.*
Dark gray	**T1371.4**	M109190000	-	6

Chiara
All the voices of nature

Experiences are more intense when senses are fully engaged. Chiara range focuses on the visual sense with a colour palette inspired by nature, the fruits of the land and by its elements. All this give born to distinct and unique finishes, ideal to be integrated into a variety of environments and to welcome people who live there.

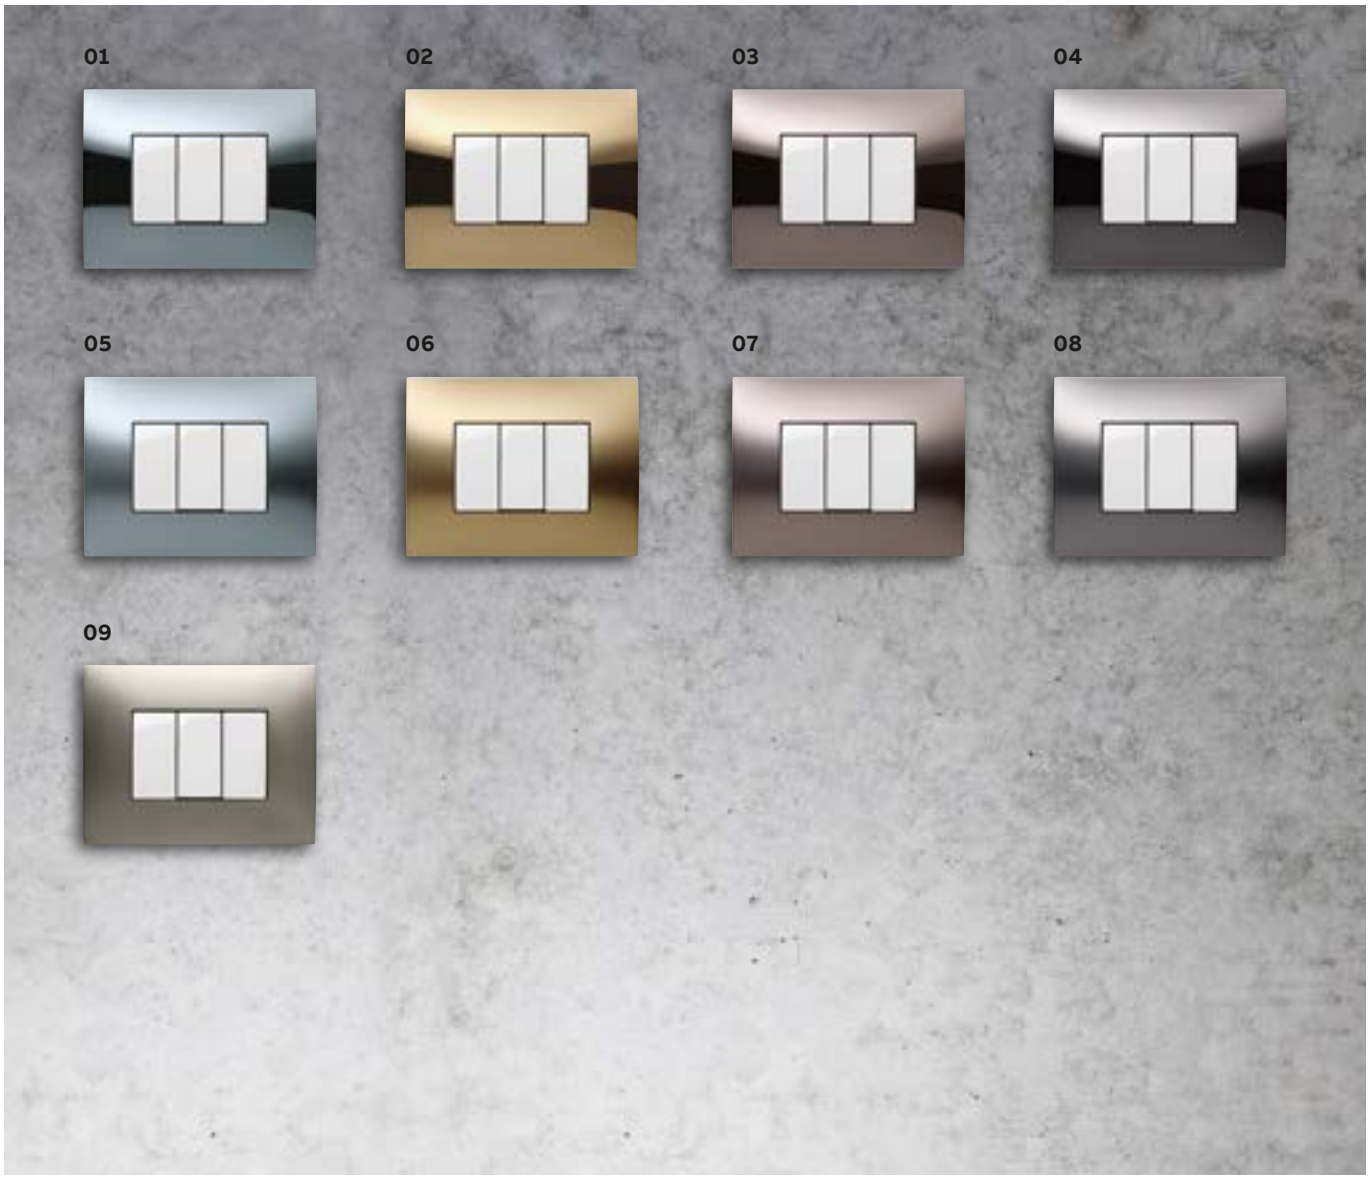

CHIARA

01 Glossy Chrome
02 Glossy Gold
03 Glossy Bronze
04 Glossy Metal Black
05 Satin Chrome
06 Satin Gold
07 Satin Bronze
08 Satin Metal Black
09 Brushed Steel

Chiara
All the voices of nature

CHIARA

10 White
11 Pastel Yellow
12 Stone
13 Pastel Green
14 Volcano
15 Sand
16 Pastel Orange
17 Fire Red
18 Chiara antibacterial

Chiara
Selected functions

Command devices.
Circuit-breakers, push-buttons, switches, inverters, relays and commutator devices in different versions for configuring functions and control points in the most flexible and suitable manner for any home or office environment. All command devices, except for relays and switches, can be illuminated.

Protection devices.
These devices trigger in case of overloads, short-circuits and other phenomena that pose a risk to the safety of people and which impair the proper functioning of connected loads; their role is a direct downstream protection without interfering with the power supply of other points of the electrical installation.

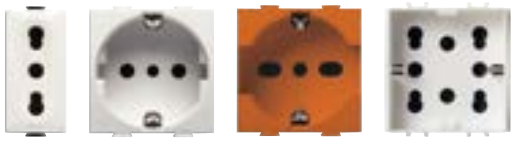

Socket outlets.
10-16A 2P+T socket outlets for 250V lines compliant with Italian and German standards, with safety shutters and side/central ground. P17/11, P30 and P30/17 socket outlets are available also in coloured version for privileged circuits. The Side innovative socket outlet is also available, combining a German standard-based and two Italian bivalent socket outlets.

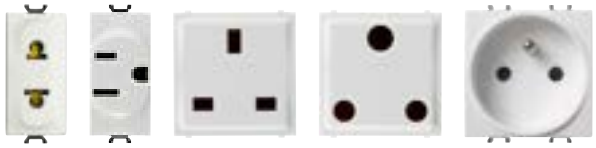

The range also includes the main socket outlets based on other different standards: EUR-American and American with grounding, for 127V lines; 13A e 16A English and 2P+T French for 250V lines.

Special socket outlets
Shaver socket outlet, 2.1A USB charger and connectors for telephony applications and data transmission, available in different versions that meet the most used and advanced wiring international standards.

Signalling devices.
Warning lights to indicate the operating status of the connected devices, bells and buzzers.

Chiara
Selected functions

—

Safety and comfort equipment.
To optimize the operation of the electrical devices and make the rooms more liveable, the range includes devices for programming, adjustment and timing, such as Chrono thermostats, electronic thermostats, dimmers and IR presence detectors with twilight threshold. Extractable anti-blackout lamps and emergency lamps are available with wide operating autonomy.

—

Components for installation.
Blank cover for unused modules and 2, 3, 4, 7 and 7+7 module mounting grids for the installation of Equipment and components inside flush-mounting round and rectangular boxes.

—

Other installation solutions.
Products and solutions for secure installation (IP55 covers and IP40/IP55 boxes) are available, as well as adapters for installation on DIN rail or Undernet retractable turret. The self-supporting frames are convenient and flexible solutions for any specific installation solution.

Chiara

Installation overview.

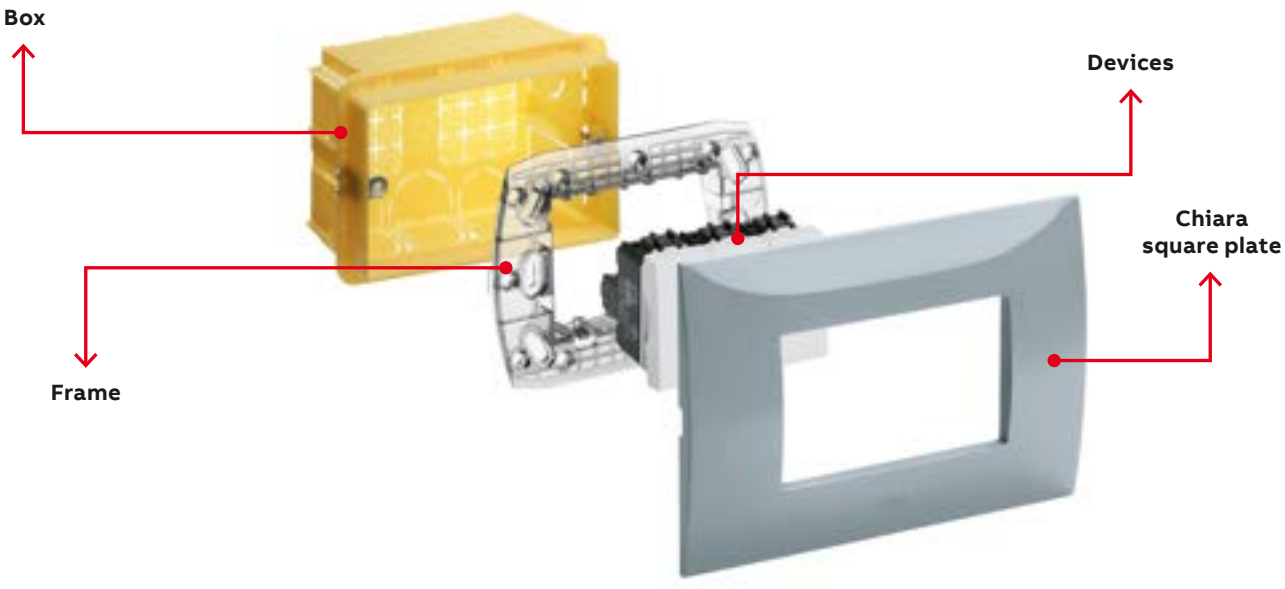

Flexibility is a feature of Chiara.
The composition of the devices is particularly simple: the mounting greed is made of semi-transparent plastic material for easy mounting in the flush-mounted boxes.
On the same mounting greed you can choose either to mount Chiara or Chiara Xite plates.

Quick installation of devices.

Specifications of screws and terminals. The composition of the devices is particularly simple: the frame is made from semi-transparent plastic material for easy mounting in the flush-mounted boxes.

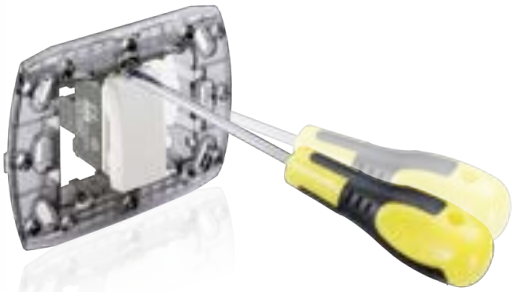

- Frontal installation of the switches on the frame
- Modularity of the switches: 22 mm



Switch illumination.

Chiara

Installation on concrete walls.

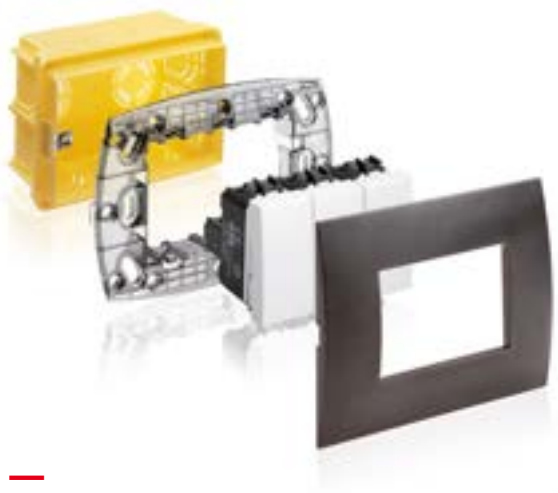

No. Modules	Screw distance	Compatible box
2 (with claws)	-	ABB 00 050
2 (with screws)	60 mm	ABB 00 050
3	83.5 mm	ABB 1SL006A00
4	108 mm	ABB 00 053
7	100 mm	ABB 1SL0064A00

Note: For further information on ABB boxes for concrete walls please refer to the catalog 1SLC001001D0905 - Insulating Enclosures and Installation Materials.

Protected installation with IP55 wall-mounted enclosures.

IP40 wall-mounted enclosure

IP55 wall-mounted enclosure

No. Modules	IP40 enclosure	IP55 enclosure
1 (on 2-module enclosure)	2CSK2140CH	2CSK2155CH
2	2CSK2240CH	2CSK2255CH
3	2CSK2340CH	2CSK2355CH
4	2CSK2440CH	2CSK2455CH

The IP55 cover enclosures allow the direct assembly of devices without the aid of mounting grids.
The devices are inserted from the rear. See technical details on page 5/57. For further information on IP40/IP55 wall-mounted enclosures, please refer to the catalog 1SLC001001D0905 - Insulating Enclosures and Installation Materials.

Protected installation with IP55 cover.

IP55 wall-mounted cover

No. Modules	IP55 cover
2 (on a square or round box with screws, center distance 60mm)	2CSK3255CH
3	2CSK3355CH

Note: The IP55 covers provide a self-supporting solution that allows direct assembly of devices without the aid of mounting grids.
The devices are inserted from the rear.

Chiara – Switches

Switches

Single-pole switch

16A - 250V~

Colour	Type	Order code	Pack/Qty.
White	**2CSK1001CH**	2CSK200005R1001	16

Double-pole switch

16A - 250V~

Colour	Type	Order code	Pack/Qty.
White	**2CSK1002CH**	2CSK200015R1002	16

Single-pole switch

16A - 250V~, 2 modules

Colour	Type	Order code	Pack/Qty.
White	**2CSK1004CH**	2CSK200025R1004	8

Double-pole switch

16A - 250V~, with key control

Colour	Type	Order code	Pack/Qty.
White	**2CSK1006CH**	2CSK215740R1006	24

Double-pole switch

16A - 250V~, with universal key control

Colour	Type	Order code	Pack/Qty.
White	**2CSK1006CHU**	2CSK221395R1006	24

Two-way switches

Single-pole two-way switch

16A - 250V~

Colour	Type	Order code	Pack/Qty.
White	**2CSK1003CH**	2CSK200035R1003	16

Single-pole two-way switch

16A - 250V~, 2 modules

Colour	Type	Order code	Pack/Qty.
White	**2CSK1007CH**	2CSK200045R1007	8

Intermediate switches

Intermediate switch

16A - 250V~

Colour	Type	Order code	Pack/Qty.
White	**2CSK1010CH**	2CSK200055R1010	16

Intermediate switch

16A - 250V~, 2 modules

Colour	Type	Order code	Pack/Qty.
White	**2CSK1008CH**	2CSK200065R1008	8

Note: The lightable control devices are supplied without lamp

Chiara – Switches

Change-over switch

Change-over switch

10A - 250V~, 3 positions, with central OFF

Colour	Type	Order code	Pack/Qty.
White	**2CSK1011CH**	2CSK200075R1011	8

Single-pole two-way switch

16A - 250V~, 2 modules

Colour	Type	Order code	Pack/Qty.
White	**2CSK1007CH**	2CSK200045R1007	8

Relays

Single-pole relay with 230V~ coil

10A output contact

Colour	Type	Order code	Pack/Qty.
White	**2CSK1012CH**	2CSK200255R1012	3

4 sequence change-over switch relay

with 230V~ coil, 2 10A output contacts

Colour	Type	Order code	Pack/Qty.
White	**2CSK1014CH**	2CSK200265R1014	3

Chiara – Switches

Push Switches

Single-pole push switches NO

16A - 250V~

Colour	Type	Order code	Pack/Qty.
White	**2CSK1005CH**	2CSK200085R1005	16

Single-pole push switches NC

16A - 250V~

Colour	Type	Order code	Pack/Qty.
White	**2CSK1016CH**	2CSK200095R1016	16

One pole push-button

16AX, 2 Modules

Colour	Type	Order code	Pack/Qty.
White	**2CSK1015CH**	2CSK228545R1015	1

Double single-pole push switches NO+NO

16A - 250V~

Colour	Type	Order code	Pack/Qty.
White	**2CSK1017CH**	2CSK200195R1017	16

Double single-pole push switches NO+NO

16A - 250V~, with interlock

Colour	Type	Order code	Pack/Qty.
White	**2CSK1018CH**	2CSK200185R1018	16

Single-pole push switches 1NO and 1NC

16A - 250V~, with ON symbol

Colour	Type	Order code	Pack/Qty.
White	**2CSK1022CH**	2CSK200175R1022	16

Single-pole push switches 1NO and 1NC

16A - 250V~, with OFF symbol

Colour	Type	Order code	Pack/Qty.
White	**2CSK1023CH**	2CSK200165R1023	16

Single-pole push switches NO

16A - 250V~, with cord pull, with 2.25 m cord

Colour	Type	Order code	Pack/Qty.
White	**2CSK1020CH**	2CSK200145R1020	16

Single-pole push switches NC

16A - 250V~, with cord pull, with 2.25 m cord

Colour	Type	Order code	Pack/Qty.
White	**2CSK1021CH**	2CSK200155R1021	16

Double-pole push switches NO

16A - 250V~, with key control

Colour	Type	Order code	Pack/Qty.
White	**2CSK1009CH**	2CSK221405R1009	24

Double-pole push switches NO

16A - 250V~, with universal key control

Colour	Type	Order code	Pack/Qty.
White	**2CSK1009CHU**	2CSK221415R1009	24

Chiara – Switches

Special push switch

Single-pole push switches NO

16A - 250V~, with BELL symbol

Colour	Type	Order code	Pack/Qty.
White	**2CSK1028CH**	2CSK200105R1028	16

Single-pole push switches NO

16A - 250V~, with KEY symbol

Colour	Type	Order code	Pack/Qty.
White	**2CSK1029CH**	2CSK200225R1029	16

Single-pole push switches NO

16A - 250V~, with STAIR LIGHT symbol

Colour	Type	Order code	Pack/Qty.
White	**2CSK1030CH**	2CSK200115R1030	16

Single-pole push switches NO

16A - 250V~, with red diffuser

Colour	Type	Order code	Pack/Qty.
Red	**2CSK1024CH**	2CSK200215R1024	16

Single-pole push switches NO

16A -250V~, with red diffuser and DO NOT DISTURB symbol

Colour	Type	Order code	Pack/Qty.
Red	**2CSK1034CH**	2CSK231175R1034	16

Single-pole push switches NO

x 16A - 250V~, with green diffuser

Colour	Type	Order code	Pack/Qty.
Green	**2CSK1025CH**	2CSK200205R1025	16

Single-pole push switches NO

16A - 250V~, with green diffuser and MAKE UP ROOM symbol

Colour	Type	Order code	Pack/Qty.
Green	**2CSK1035CH**	2CSK231185R1035	16

Single-pole push switches NO

16A - 250V~, with orange diffuser

Colour	Type	Order code	Pack/Qty.
Orange	**2CSK1026CH**	2CSK200135R1026	16

Single-pole push switches NO

16A - 250V~, with white diffuser, 1 module

Colour	Type	Order code	Pack/Qty.
White	**2CSK1027CH**	2CSK200125R1027	16

Single-pole push switches NO

16A - 250V~, with backlit label holder plate, 2 modules

Colour	Type	Order code	Pack/Qty.
White	**2CSK1031CH**	2CSK200235R1031	8

Single-pole push switches NO

16A - 250V~, with backlit label holder plate, 3 modules

Colour	Type	Order code	Pack/Qty.
White	**2CSK1032CH**	2CSK203145R1032	1

Chiara – Socket outlets

Italian standard socket outlets with safety shutters

2P+E socket outlet

10A - 250V~, P11 type

Colour	Type	Order code	Pack/Qty.
White	**2CSK1101C**	2CSK200275R1101	16

2P+E socket outlet

10/16A - 250V~, P17/P11 type

Colour	Type	Order code	Pack/Qty.
White	**2CSK1103CH**	2CSK200295R1103	16

2P+E socket outlets

10/16A - 250V~, P17/P11 type, coloured for privileged circuits

Colour	Type	Order code	Pack/Qty.
Red	**2CSK1104CH**	2CSK200325R1104	16

2P+E socket outlets

10/16A - 250V~, P17/P11 type, coloured for privileged circuits

Colour	Type	Order code	Pack/Qty.
Green	**2CSK1105CH**	2CSK200345R1105	16

2P+E socket outlets

10/16A - 250V~, P17/P11 type, coloured for privileged circuits

Colour	Type	Order code	Pack/Qty.
Orange	**2CSK1106CH**	2CSK200335R1106	16

Italian/German standard socket outlets with safety shutters

2P+E socket outlet

16A - 250V~, P30 type

Colour	Type	Order code	Pack/Qty.
White	**2CSK1108CH**	2CSK200305R1108	8

2P+E socket outlets

16A - 250V~, P30 type, coloured for privileged circuits

Colour	Type	Order code	Pack/Qty.
Red	**2CSK1114CH**	2CSK200355R1114	8

2P+E socket outlets

16A - 250V~, P30 type, coloured for privileged circuits

Colour	Type	Order code	Pack/Qty.
Green	**2CSK1115CH**	2CSK200365R1115	8

2P+E socket outlets

16A - 250V~, P30 type, coloured for privileged circuits

Colour	Type	Order code	Pack/Qty.
Orange	**2CSK1116CH**	2CSK200375R1116	8

2P+E socket outlet

16A - 250V~, P30/17 type

Colour	Type	Order code	Pack/Qty.
White	**2CSK1109CH**	2CSK200315R1109	8

Chiara – Socket outlets

Italian/German standard socket outlets with safety shutters

2P+E socket outlets

16A - 250V~, P30/17 type, coloured for privileged circuits

Colour	Type	Order code	Pack/Qty.
Red	**2CSK1110CH**	2CSK200385R1110	8

2P+E socket outlets

16A - 250V~, P30/17 type, coloured for privileged circuits

Colour	Type	Order code	Pack/Qty.
Green	**2CSK1111CH**	2CSK200405R1111	8

2P+E socket outlets

16A - 250V~, P30/17 type, coloured for privileged circuits

Colour	Type	Order code	Pack/Qty.
Orange	**2CSK1112CH**	2CSK200395R1112	8

French socket outlet

2P+E socket outlet

16A - French standard

Colour	Type	Order code	Pack/Qty.
White	**2CSK1144CH**	2CSK229365R1144	1

British socket outlets

2P+E socket outlet

13A - UK standard

Colour	Type	Order code	Pack/Qty.
White	**2CSK1134CH**	2CSK228805R1134	1

2P+E socket outlet

16A - UK standard

Colour	Type	Order code	Pack/Qty.
White	**2CSK1164CH**	2CSK228815R1164	1

American and Euro-American socket outlets

2P+E socket outlet

15A - 127V~ - US standard

Colour	Type	Order code	Pack/Qty.
White	**2CSK1145CH**	2CSK228335R1145	1

2P socket outlet

16A - Euro-American standard

Colour	Type	Order code	Pack/Qty.
White	**2CSK1146CH**	2CSK229355R1146	1

Double 2P+E socket outlet

15A - 127V~ - US standard

Colour	Type	Order code	Pack/Qty.
White	**2CSK1147CH**	2CSK226182R1147	1

Chiara – Socket outlets

Interlocked socket outlets with automatic MCB and automatic RCD

2P+E socket outlet

16A - 250V, interlocked with MCB, P17/11

Colour	Type	Order code	Pack/Qty.
White	**2CSK1324CH**	2CSK206475R1324	48

2P+E socket outlet

16A - 250V, interlocked with MCB, P30

Colour	Type	Order code	Pack/Qty.
White	**2CSK1325CH**	2CSK206485R1325	48

2P+E socket outlet

16A - 250V, with RCD 10mA, P17/11

Colour	Type	Order code	Pack/Qty.
White	**2CSK1326CH**	2CSK206495R1326	48

Special socket outlets

2P shaver socket with insulating transformer

Power supply
230V~ - 50/60Hz
Output voltage 125V~ (American standard 2P socket) or 230V~ (2P socket outlet, P11 type)

Colour	Type	Order code	Pack/Qty.
White	**2CSK1113CH**	2CSK200415R1113	1

Flush-mounted USB charging unit

max 2.1A with type A male connector, 230V~ power supply, 50 / 60Hz, 5V DC output voltage

Colour	Type	Order code	Pack/Qty.
White	**2CSK1162CH**	2CSK235403R1162	1

Side socket outlet

(1 Schuko + 2 Italian socket outlets), 1 x 2P+E 16A + 2 x 2P+E 10/16A

Colour	Type	Order code	Pack/Qty.
White	**2CSK1193CH**	2CSK231295R1193	10

Chiara – Socket outlets

TV/SAT socket outlets

TV coaxial socket outlet

Direct, male IEC connector ø 9.5 mm, insulated type

Colour	Type	Order code	Pack/Qty.
White	**2CSK1117CH**	2CSK200495R1117	8

TV/SAT coaxial socket outlet

Direct, male IEC connector ø 9.5 mm, with feedthrough of direct current

Colour	Type	Order code	Pack/Qty.
White	**2CSK1118CH**	2CSK200505R1118	8

TV/SAT coaxial socket outlet

Feedthrough, male IEC connector ø 9.5 mm, attenuation 7dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1132CH**	2CSK203155R1132	8

TV/SAT coaxial socket outlet

Feedthrough, male IEC connector ø 9.5 mm, attenuation 10dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1136CH**	2CSK203175R1136	8

TV/SAT coaxial socket outlet

feedthrough, male IEC connector ø 9.5 mm, attenuation 14dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1137CH**	2CSK204095R1137	8

TV/SAT coaxial socket outlet

Feedthrough, male IEC connector ø 9.5 mm, attenuation 18dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1138CH**	2CSK203185R1138	8

TV/SAT coaxial socket outlet

Direct, female F connector, with feed-through of direct current

Colour	Type	Order code	Pack/Qty.
White	**2CSK1119CH**	2CSK200515R1119	8

Double demixed TV/SAT coaxial socket outlet

Direct, male IEC connector ø 9.5 mm and female F connector

Colour	Type	Order code	Pack/Qty.
White	**2CSK1133CH**	2CSK203165R1133	8

Double demixed TV/SAT coaxial socket outlet

Feedthrough, male IEC connector ø 9.5 mm and female F connector, attenuation 7dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1120CH**	2CSK200525R1120	8

Double demixed TV/SAT coaxial socket outlet

Feedthrough, male IEC connector ø 9.5 mm and female F connector, attenuation 10dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1130CH**	2CSK200535R1130	8

Double demixed TV/SAT coaxial socket outlet

Feedthrough, male IEC connector ø 9.5 mm and female F connector, attenuation 14dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1131CH**	2CSK200545R1131	8

Double demixed TV/SAT coaxial socket outlet

Feedthrough, male IEC connector ø 9.5 mm and female F connector, attenuation 18dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1139CH**	2CSK203195R1139	8

Chiara – Socket outlets, Protection devices

Network and telephone socket outlets

RJ11 telephone connector

Colour	Type	Order code	Pack/Qty.
White	**2CSK1121CH**	2CSK200425R1121	16

RJ12 telephone connector

Colour	Type	Order code	Pack/Qty.
White	**2CSK1122CH**	2CSK200435R1122	16

RJ45 connector

Cat. 5e, UTP (unshielded)

Colour	Type	Order code	Pack/Qty.
White	**2CSK1124CH**	2CSK200445R1124	16

RJ45 connector

Cat. 5e, FTP (shielded)

Colour	Type	Order code	Pack/Qty.
White	**2CSK1125CH**	2CSK200455R1125	16

RJ45 connector

Cat. 6, UTP (unshielded)

Colour	Type	Order code	Pack/Qty.
White	**2CSK1127CH**	2CSK200475R1127	16

RJ45 connector

Cat. 6, FTP (shielded)

Colour	Type	Order code	Pack/Qty.
White	**2CSK1128CH**	2CSK200465R1128	16

Adapter for RJ45 connector

Keystone type

Colour	Type	Order code	Pack/Qty.
White	**2CSK1135CH**	2CSK200485R1135	16

Fuse holders, overvoltage limiters

Fuse holder

For fuses Ø5x20 / Ø6.3x32 mm, max. 16A

Colour	Type	Order code	Pack/Qty.
White	**2CSK1301CH**	2CSK200635R1301	24

Overvoltage limiter

75J, 230V~

Colour	Type	Order code	Pack/Qty.
White	**2CSK1315CH**	2CSK221425R1315	24

Chiara – Protection devices, Signalling devices

Miniature circuit-breakers and Residual current circuit-breakers

Automatic MCB

1P+N, C6, breaking capacity 1.5kA

Colour	Type	Order code	Pack/Qty.
White	**2CSK1304CH**	2CSK200655R1304	16

Automatic MCB

1P+N, C10, breaking capacity 3kA

Colour	Type	Order code	Pack/Qty.
White	**2CSK1305CH**	2CSK200665R1305	16

Automatic MCB

1P+N, C16, breaking capacity 3kA

Colour	Type	Order code	Pack/Qty.
White	**2CSK1306CH**	2CSK200675R1306	16

Automatic RCD

1P+N, C6 - 10 mA, breaking capacity 1.5kA

Colour	Type	Order code	Pack/Qty.
White	**2CSK1307CH**	2CSK200685R1307	8

Miniature circuit-breakers and Residual current circuit-breakers

Automatic RCD

1P+N, C10 - 10 mA, breaking capacity 1.5kA

Colour	Type	Order code	Pack/Qty.
White	**2CSK1308CH**	2CSK200695R1308	8

Automatic RCD

1P+N, C16 - 10 mA, breaking capacity 1.5kA

Colour	Type	Order code	Pack/Qty.
White	**2CSK1309CH**	2CSK200705R1309	8

Automatic RCD

1P+N, C6 - 30 mA, breaking capacity 1.5kA

Colour	Type	Order code	Pack/Qty.
White	**2CSK1328CH**	2CSK213425R1328	1

Automatic RCD

1P+N, C10 - 30 mA, breaking capacity 1.5kA

Colour	Type	Order code	Pack/Qty.
White	**2CSK1329CH**	2CSK213435R1329	1

Automatic RCD

1P+N, C16 - 30 mA, breaking capacity 1.5kA

Colour	Type	Order code	Pack/Qty.
White	**2CSK1330CH**	2CSK213445R1330	1

Chiara – Signalling devices, Safety and comfort devices

Light signals

Orange warning light

(supplied without lamp)

Colour	Type	Order code	Pack/Qty.
Orange	**2CSK1310CH**	2CSK200605R1310	16

White warning light

(supplied without lamp)

Colour	Type	Order code	Pack/Qty.
	2CSK1311CH	2CSK200625R1311	16

Red warning light

(supplied without lamp)

Colour	Type	Order code	Pack/Qty.
Red	**2CSK1312CH**	2CSK200595R1312	16

Green warning light

(supplied without lamp)

Colour	Type	Order code	Pack/Qty.
Green	**2CSK1313CH**	2CSK200615R1313	16

Bells and buzzers

Electro-mechanical bell

12V, power 5VA, sound intensity 80dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1317CH**	2CSK200555R1317	8

Electro-mechanical bell

230V, power 8VA, sound intensity 80dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1318CH**	2CSK200565R1318	8

Electro-mechanical buzzer

12V, power 5VA, sound intensity 70dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1321CH**	2CSK200575R1321	8

Electro-mechanical buzzer

230V, power 8VA, sound intensity 70dB

Colour	Type	Order code	Pack/Qty.
White	**2CSK1322CH**	2CSK200585R1322	8

Chiara – Signalling devices, Safety and comfort devices

Time-programmed thermostats and thermostats

Summer/winter electronic time-programmed thermostat with 4 temperature levels

Relay output, 1 NO/NC change-over contact 8A (AC1)/2A (AC15) - Power supply 230V~ 50/60Hz

Colour	Type	Order code	Pack/Qty.
White	**2CSK2201CH**	2CSK200765R2201	1

Summer/winter electronic thermostat

Relay output, 1 NO contact 8A (AC1)/2A (AC15) - Power supply 230V~ 50/60Hz

Colour	Type	Order code	Pack/Qty.
White	**2CSK1202CH**	2CSK200755R1202	1

Dimmer

Electronic dimmer

With rotary control for resistive loads 100-500W, 230V~ 50/60Hz

Colour	Type	Order code	Pack/Qty.
White	**2CSK1205CH**	2CSK200715R1205	3

Electronic dimmer

With rotary control and with two-way switch for resistive loads 100-500W, 230V~ - 50/60Hz

Colour	Type	Order code	Pack/Qty.
White	**2CSK1204CH**	2CSK200735R1204	3

Electronic dimmer

With pushbutton control for resistive and inductive loads 60-500W, (60-500VA) 230V~ - 50/60Hz

Colour	Type	Order code	Pack/Qty.
White	**2CSK1207CH**	2CSK200725R1207	3

Gas detectors

Electronic natural gas detector

With acoustic and light signal, relay output, 1 NO/NC change-over contact 6A (AC1)/2A (AC15) - 250V~. Power supply 230V~ - 50Hz. Equipped with dedicated frame for installation on type 503 box

Colour	Type	Order code	Pack/Qty.
	2CSK1210CH	2CSK225295R1210	1

Electronic LPG gas detector

With acoustic and light signal, relay output, 1 NO/NC change-over contact 6A (AC1)/2A (AC15) - 250V~. Power supply 230V~ - 50Hz. Equipped with dedicated frame for installation on type 503 box

Colour	Type	Order code	Pack/Qty.
	2CSK1211CH	2CSK225305R1211	1

Chiara – Signalling devices, Safety and comfort devices

Emergency lighting

Removable anti-blackout light, 230V~

Charge reserve 4.5 h and recharge time 10-20h. To be combined with 230V~ socket outlets; particularly recommended for codes 2CSK1108CH and 2CSK1109CH

Colour	Type	Order code	Pack/Qty.
White	**2CSK1214CH**	2CSK203205R1214	1

LED light for emergency lighting or steplight

Charge reserve up to 2h and recharge time 48h.
Power supply 230V~ - 50/60Hz.

Colour	Type	Order code	Pack/Qty.
White	**2CSK1235CH**	2CSk218932R1235	1

2-module pluggable blackout lamp

Charge reserve up to 2h and recharge time 48h.
Power supply 230V~ - 50/60Hz.
It turns on to enlightening areas where it is installed if a blackout occurs.
The lamp can be unplugged and used as a portable torch.

Colour	Type	Order code	Pack/Qty.
White	**2CSK1236CH**	2CSK218782R1236	1

Universal badge switch with location light

Relay output with NO contact 10A (AC1).
Power supply 230V~ 50/60Hz

Colour	Type	Order code	Pack/Qty.
White	**2CSK1426CH**	2CSK223155R1426	12

IR motion detector

with twilight sensor for control and adjustment of the operation time of lighting devices.
Relay output NO 5A (AC1)/2A (AC15) - 250V~.
Power supply 230V~ - 50/60Hz

Colour	Type	Order code	Pack/Qty.
White	**2CSK1226CH**	2CSK235321R1226	1

Other devices

Universal badge switch

3M

Colour	Type	Order code	Pack/Qty.
White	**2CSK1427CH**	2CSK228275R1427	1

Chiara – Signalling devices, Safety and comfort devices

Blank covers

Blank cover

1 module

Colour	Type	Order code	Pack/Qty.
White	**2CSK1601CH**	2CSK200785R1601	90

Blank cover

1 module, with hole for cable outlet ø 12.5mm

Colour	Type	Order code	Pack/Qty.
White	**2CSK1606CH**	2CSK200795R1606	90

1-module enclosures

1-module frame and 1-module mounting grid

Colour	Type	Order code	Pack/Qty.
White	**2CSK3102CH**	2CSK229375R3102	1

1-module frame with housing

Colour	Type	Order code	Pack/Qty.
White	**2CSK3101CH**	2CSK228345R3101	1

Chiara – Components for installation

Mounting grids

2-modules mounting grid

With latching claws for round box

Size	Modules	Type	Order code	Pack/Qty.
1-gang	2	**2CSK1612CH**	2CSK203245R1612	10

2-modules mounting grid

With screws for rectangular or round box with screws (center distance 60mm)

Size	Modules	Type	Order code	Pack/Qty.
1-gang	2	**2CSK1602CH**	2CSK200815R1602	20

3-modules mounting grid

For rectangular box (center distance 83.5 mm)

Size	Modules	Type	Order code	Pack/Qty.
1-gang	3	**2CSK1603CH**	2CSK200825R1603	

4-modules mounting grid

For rectangular box (center distance 108 mm)

Size	Modules	Type	Order code	Pack/Qty.
1-gang	4	**2CSK1604CH**	2CSK200835R1604	10

7-modules mounting grid

For rectangular box (center distance 100 mm)

Size	Modules	Type	Order code	Pack/Qty.
1-gang	7	**2CSK1607CH**	2CSK200845R1607	10

7+7-modules mounting grid

Size	Modules	Type	Order code	Pack/Qty.
2-gang	7+7	**2CSK1614CH**	2CSK228265R1614	4

Accessories

LED lamp

230V, cable length 100 mm.
To be used in combination with illuminable switches

Colour	Type	Order code	Pack/Qty.
White	**2CSK1616CH**	2CSK259192R1616	24

Chiara

Other installation solutions

Self-supporting frames

Module
self-supporting frame

Size	Modules	Type	Order code	Pack/Qty.
White	2	**2CSK1621CH**	2CSK206725R1621	1/12
Grey	2	**2CSK1622CH**	2CSK206735R1622	1/12
Slate grey	2	**2CSK1623CH**	2CSK206745R1623	1/12
Brown	2	**2CSK1624CH**	2CSK206755R1624	1/12

Self-supporting frames

Module
self-supporting frame

Size	Modules	Type	Order code	Pack/Qty.
White	3	**2CSK1631CH**	2CSK206765R1631	1/12
Grey	3	**2CSK1632CH**	2CSK206775R1632	1/12
Slate grey	3	**2CSK1633CH**	2CSK206785R1633	1/12
Brown	3	**2CSK1634CH**	2CSK206795R1634	1/12

Self-supporting frames

Module
self-supporting frame

Size	Modules	Type	Order code	Pack/Qty.
White	4	**2CSK1641CH**	2CSK206805R1641	1/12
Grey	4	**2CSK1642CH**	2CSK206815R1642	1/12
Slate grey	4	**2CSK1643CH**	2CSK206825R1643	1/12
Brown	4	**2CSK1644CH**	2CSK206835R1644	1/12

Chiara

Undernet towers and adapters

Floor box - 3 columns - 5 mm. hollow lid

Floor box with 5 mm. deep hollow lid for carpet, linoleum, etc.
Protection degree:
- IP52 between the box and the floor ensured by loss-proof seal.
- IP4x at the rim of the lid.
- IP2x at the cable inlet.

Resistance of the lid: 1500 N according to DIN VDE 0364.
Resistance to chemicals present in the main detergents.
Direct installation in technical or raised floor. Installation in tradiotional floors using the flush mounting metal box code M109300000

Size	Modules	Type	Order code	Pack/Qty.
Black	16	10900	M109000000	1
Black	10	10902	M109020000	1

Floor box - 3 columns - 5 mm. hollow lid

Floor box with 5 mm. deep hollow lid for carpet, linoleum, etc.
Protection degree:
- IP52 between the box and the floor ensured by loss-proof seal.
- IP4x at the rim of the lid.
- IP2x at the cable inlet.

Resistance of the lid: 1500 N according to DIN VDE 0364.
Resistance to chemicals present in the main detergents.
Direct installation in technical or raised floor. Installation in traditional floors using the flush mounting metal box code M109300000.

Size	Modules	Type	Order code	Pack/Qty.
Stainless steel	16	10901	M109010000	1
Stainless steel	10	10903	M109030000	1

Flush mounting metal box

Accessory for the installation of the floor boxes code T1393 and T1393.1 in traditional/concrete floors.
Supplied with protection semi-lid and bunkheads for Ø25 mm and 32 mm conduits.
Size (height x width x depth): 230x305x105 mm.

Colour	Type	Order code	Pack/Qty.
	M10930	M109300000	1

Support frame for Undernet tower.
5 contact blocks support is compatible with Undernet tower 10900-10901.
6 contact blocks support is compatible with Undernet tower 10902-10903

Size	Modules	Type	Order code	Pack/Qty.
Black	5	**2CSK1625CH**	2CSK206705R1625	1/12
Black	6	**2CSK1626CH**	2CSK206715R1626	1/12

DIN-rail adapter 1-2-3 modules

DIN-rail adapter

For 1-2-3 modules, versionable

Size	Modules	Type	Order code	Pack/Qty.
White	1-2-3	**2CSK1608CH**	2CSK206505R1608	1/6

IP40 surface mounting boxes

Surface mounting box - IP40 - 1 module

Box for surface installation. 1-gang - 2 modules.
For 1 module devices. Size (height x width x depth): 80 x 65 x 55 mm. Color: gray - RAL 7035.
Protection degree: IP40 / IK06. Incoming with multi-diameter cone for tubes/cables max. Ø20.
The box includes the clipping system to clasp inserts (no mounting plate, nor frame are necessary).

Colour	Type	Order code	Pack/Qty.
Grey	**2CSK2140CH**	2CSK203215R2140	10/40

Surface mounting box - IP40 - 2 modules

Box for surface installation. 1-gang - 2 modules.
For 1 or 2 modules devices. Size (height x width x depth): 80 x 65 x 55 mm. Color: gray - RAL 7035.
Protection degree: IP40 / IK06. Incoming with multi-diameter cone for tubes/cables max. Ø20.
The box includes the clipping system to clasp inserts (no mounting plate, nor frame are necessary).

Colour	Type	Order code	Pack/Qty.
Grey	**2CSK2240CH**	2CSK200855R2240	10/40

Surface mounting box - IP40 - 3 modules

Box for surface installation. 1-gang - 3 modules.
For 1, 2 or 3 modules devices. Size (height x width x depth): 80 x 104 x 55 mm. Color: gray - RAL 7035.
Protection degree: IP40 / IK06. Incoming with multi-diameter cone for tubes/cables max. Ø20.
The box includes the clipping system to clasp inserts (no mounting plate, nor frame are necessary).

Colour	Type	Order code	Pack/Qty.
Grey	**2CSK2340CH**	2CSK200875R2340	10/30

Surface mounting box - IP40 - 2+2 modules

Box for surface installation. 2-gang - 2+2 modules.
For 1 or 2 modules devices. Size (height x width x depth): 80 x 130 x 55 mm. Color: gray - RAL 7035.
Protection degree: IP40 / IK06. Incoming with multi-diameter cone for tubes/cables max. Ø20.
The box includes the clipping system to clasp inserts (no mounting plate, nor frame are necessary).

Colour	Type	Order code	Pack/Qty.
Grey	**2CSK2440CH**	2CSK200885R2440	10/20

Chiara

IP55 surface mounting boxes

Surface mounting box - IP55 - 1 module

Box for surface installation. 1-gang - 2 modules.
For 1 module devices. Size (height x width x depth): 80 x 65 x 63 mm. Color: gray - RAL 7035.
Protection degree: IP55 (with lid closed).
Opening angle of the lid: 120°.
The lid allows operating the switch in closed position.
Incoming with multi-diameter cone for tubes/cables max. Ø20.
The box includes the clipping system to clasp inserts (no mounting plate, nor frame are necessary).

Colour	Type	Order code	Pack/Qty.
Grey	**2CSK2155CH**	2CSK203225R2155	10/40

Surface mounting box - IP55 - 2 modules

Box for surface installation. 1-gang - 2 modules.
For 1 or 2 module devices. Size (height x width x depth): 80 x 65 x 63 mm. Color: gray - RAL 7035.
Protection degree: IP55 (with lid closed).
Opening angle of the lid: 120°.
The lid allows operating the switch in closed position.
Incoming with multi-diameter cone for tubes/cables max. Ø20.
The box includes the clipping system to clasp inserts (no mounting plate, nor frame are necessary).

Colour	Type	Order code	Pack/Qty.
Grey	**2CSK2255CH**	2CSK200895R2255	10/40

Surface mounting box - IP55 - 3 modules

Box for surface installation. 1-gang - 3 modules.
For 1,2 or 3 module devices. Size (height x width x depth): 80 x 104 x 63 mm. Color: gray - RAL 7035.
Protection degree: IP55 (with lid closed).
Opening angle of the lid: 120°.
The lid allows operating the switch in closed position.
Incoming with multi-diameter cone for tubes/cables max. Ø20.
The box includes the clipping system to clasp inserts (no mounting plate, nor frame are necessary).

Colour	Type	Order code	Pack/Qty.
Grey	**2CSK2355CH**	2CSK200915R2355	10/30

Surface mounting box - IP55 - 3 modules

Box for surface installation. 2-gang - 2+2 modules.
For 1,or 2 module devices. Size (height x width x depth): 80 x 130 x 63 mm. Color: gray - RAL 7035.
Protection degree: IP55 (with lid closed).
Opening angle of the lid: 120°.
The lid allows operating the switch in closed position.
Incoming with multi-diameter cone for tubes/cables max. Ø20.
The box includes the clipping system to clasp inserts (no mounting plate, nor frame are necessary).

Colour	Type	Order code	Pack/Qty.
Grey	**2CSK2455CH**	2CSK200925R2455	10/20

IP55 flush-mounted covers

Flush mounting frames - IP55 - 2 modules

Frames for IP55 flush mounted installations.
1-gang - 2 modules.
For 1 or 2 module devices.
Protection degree: IP55 (with lid closed).
Opening angle of the lid: 120°.
The lid allows operating the switch in closed position.
Suitable for 60mm screw distance boxes.

Colour	Type	Order code	Pack/Qty.
Grey	**2CSK3255CH**	2CSK200935R3255	10/40

Flush mounting frames - IP55 - 3 modules

Frames for IP55 flush mounted installations.
1-gang - 3 modules.
For 1, 2 or 3 module devices.
Protection degree: IP55 (with lid closed).
Opening angle of the lid: 120°.
The lid allows operating the switch in closed position.
Suitable for 83,5mm screw distance 3 module boxes.

Colour	Type	Order code	Pack/Qty.
Grey	**2CSK3355CH**	2CSK200945R3355	10/40

Chiara

Order codes

Metallic frames with glossy and satin finish
Reference standard: CEI 23-9 (EN 60669-1)
Frame, 2 modules, Glossy CHROME 2gang(s) Chrome Horizontal mounting - Chiara

Glossy Chrome

Size	Type	Pack/Qty.
2M	2CSK0215CH	1
3M	2CSK0315CH	1
4M	2CSK0415CH	1
7M	2CSK0715CH	1

Metallic frames with glossy and satin finish
Reference standard: CEI 23-9 (EN 60669-1)
Frame, 2 modules, Glossy GOLD 2gang(s) Gold Horizontal mounting - Chiara

Glossy Gold

Size	Type	Pack/Qty.
2M	2CSK0253CH	1
3M	2CSK0353CH	1
4M	2CSK0453CH	1
7M	2CSK0753CH	1

Metallic frames with glossy and satin finish
Reference standard: CEI 23-9 (EN 60669-1)
Frame, 2 modules, Glossy METAL BLACK 1gang(s) Black Horizontal mounting - Chiara

Glossy Bronze

Size	Type	Pack/Qty.
2M	2CSK0251CH	1
3M	2CSK0351CH	1
4M	2CSK0451CH	1
7M	2CSK0751CH	1

Metallic frames with glossy and satin finish
Reference standard: CEI 23-9 (EN 60669-1)
Frame, 2 modules, Glossy GOLD 2gang(s) Gold Horizontal mounting - Chiara

Glossy Metal Black

Size	Type	Pack/Qty.
2M	2CSK0217CH	1
3M	2CSK0317CH	1
4M	2CSK0417CH	1
7M	2CSK0717CH	1

Metallic frames with glossy and satin finish
Reference standard: CEI 23-9 (EN 60669-1)
Frame, 2 modules, CHROME satin finish 1gang(s) Chrome Horizontal mounting - Chiara

Satin Chrome

Size	Type	Pack/Qty.
2M	2CSK0216CH	1
3M	2CSK0316CH	1
4M	2CSK0416CH	1
7M	2CSK0716CH	1

Metallic frames with glossy and satin finish
Reference standard: CEI 23-9 (EN 60669-1)
Frame, 2 modules, GOLD satin finish 1gang(s) Gold Horizontal mounting - Chiara

Satin Gold

Size	Type	Pack/Qty.
2M	2CSK0254CH	1
3M	2CSK0354CH	1
4M	2CSK0454CH	1
7M	2CSK0754CH	1

Metallic frames with glossy and satin finish
Reference standard: CEI 23-9 (EN 60669-1)
Frame, 2 modules, BRONZE satin finish 1gang(s) Bronze Horizontal mounting - Chiara

Satin Bronze

Size	Type	Pack/Qty.
2M	2CSK0252CH	1
3M	2CSK0352CH	1
4M	2CSK0452CH	1
7M	2CSK0752CH	1

Metallic frames with glossy and satin finish
Reference standard: CEI 23-9 (EN 60669-1)
Frame, 2 modules, METAL BLACK satin finish 1gang(s) Black Horizontal mounting - Chiara

Satin Metal Black

Size	Type	Pack/Qty.
2M	2CSK0218CH	1
3M	2CSK0318CH	1
4M	2CSK0418CH	1
7M	2CSK0718CH	1

Metallic frames with glossy and satin finish
Reference standard: CEI 23-9 (EN 60669-1)
2 modules frame, brushed steel 2gang(s) Stainless steel Horizontal mounting - Chiara

Brushed Steel

Size	Type	Pack/Qty.
2M	2CSK0219CH	1
3M	2CSK0319CH	1
4M	2CSK0419CH	1
7M	2CSK0719CH	1

Chiara

Order codes

Technopolymer frames
Reference standard: CEI 23-9 (EN 60669-1)
WHITE 3gang(s) White Horizontal mounting - Chiara

White

Size	Modules	Type	Order code	Pack/Qty.
2M	2	**2CSK0201CH**	2CSK200955R0201	1
3M	3	**2CSK0301CH**	2CSK201015R0301	1
4M	4	**2CSK0401CH**	2CSK201075R0401	1
7M	7	**2CSK0701CH**	2CSK201135R0701	1
7+7M	14	**2CSK1401CH**	2CSK228255R1401	1
3M	1 central	**2CSK207501R0300**	2CSK207501R0300	1
3M	2 separated	**2CSK207491R0310**	2CSK207491R0310	1
3M	Blind	**2CSK207481R0320**	2CSK207481R0320	1

Technopolymer frames
Reference standard: CEI 23-9 (EN 60669-1)
YELLOW 1gang(s) Yellow Horizontal mounting - Chiara

Pastel Yellow

Size	Modules	Type	Order code	Pack/Qty.
2M	2	**2CSK0211CH**	2CSK200975R0211	1
3M	3	**2CSK0311CH**	2CSK201035R0311	1
4M	4	**2CSK0411CH**	2CSK201095R0411	1
7M	7	**2CSK0711CH**	2CSK201155R0711	1

Technopolymer frames
Reference standard: CEI 23-9 (EN 60669-1)
STONE 2gang(s) Grey Horizontal mounting - Chiara

Stone

Size	Modules	Type	Order code	Pack/Qty.
2M	2	**2CSK0203CH**	2CSK200985R0203	1
3M	3	**2CSK0303CH**	2CSK201045R0303	1
4M	4	**2CSK0403CH**	2CSK201105R0403	1
7M	7	**2CSK0703CH**	2CSK201165R0703	1

Technopolymer frames
Reference standard: CEI 23-9 (EN 60669-1)
GREEN 1gang(s) Green Horizontal mounting - Chiara

Pastel Green

Size	Modules	Type	Order code	Pack/Qty.
2M	2	2CSK0213CH	2CSK202975R0213	1
3M	3	2CSK0313CH	2CSK203025R0313	1
4M	4	2CSK0413CH	2CSK203075R0413	1
7M	7	2CSK0713CH	2CSK203125R0713	1

Technopolymer frames
Reference standard: CEI 23-9 (EN 60669-1)
VOLCANO 1gang(s) Black Horizontal mounting - Chiara

Pastel Green

Size	Modules	Type	Order code	Pack/Qty.
2M	2	**2CSK0204CH**	2CSK200995R0204	1
3M	3	**2CSK0304CH**	2CSK201055R0304	1
4M	4	**2CSK0404CH**	2CSK201115R0404	1
7M	7	**2CSK0704CH**	2CSK201175R0704	1

Technopolymer frames
Reference standard: CEI 23-9 (EN 60669-1)
SAND 1gang(s) Beige Horizontal mounting - Chiara

Sand

Size	Modules	Type	Order code	Pack/Qty.
2M	2	2CSK0202CH	2CSK200965R0202	1
3M	3	2CSK0302CH	2CSK201025R0302	1
4M	4	2CSK0402CH	2CSK201085R0402	1
7M	7	2CSK0702CH	2CSK201145R0702	1

Technopolymer frames
Reference standard: CEI 23-9 (EN 60669-1)
ORANGE 2gang(s) Orange Horizontal mounting - Chiara

Pastel Orange

Size	Modules	Type	Order code	Pack/Qty.
2M	2	**2CSK0212CH**	2CSK202965R0212	1
3M	3	**2CSK0312CH**	2CSK203015R0312	1
4M	4	**2CSK0412CH**	2CSK203065R0412	1
7M	7	**2CSK0712CH**	2CSK203115R0712	1

Technopolymer frames
Reference standard: CEI 23-9 (EN 60669-1)
FIRE RED 1gang(s) Red Horizontal mounting - Chiara

Fire Red

Size	Modules	Type	Order code	Pack/Qty.
2M	2	**2CSK0205CH**	2CSK228475R0205	1
3M	3	**2CSK0305CH**	2CSK228485R0305	1
4M	4	**2CSK0405CH**	2CSK228495R0405	1
7M	7	**2CSK0705CH**	2CSK228505R0705	1

Chiara Antibacterial

The new solution for healthcare environments

Hospitals, clinics, laboratories and healthcare environments must guarantee maximum hygiene with a high level of safety and protection against bacterial growth for patients, visitors and medical staff. To enhance cleaner healthcare environments, ABB introduces Chiara Antibacterial, a sub-range of conventional wiring accessories of the Chiara switch assortment with antibacterial additive and technopolymer material (ABS/PC)

Size	Modules	Type	Order code	Pack/Qty.
White	3	**2CSK218722R0301**	2CSK218722R0301	1
White	4	**2CSK218722R0401**	2CSK218722R0401	1
White	7	**2CSK235112R0701**	2CSK235112R0701	1
White	1 central	**2CSK218702R0001**	2CSK218702R0001	1
White	2 separated	**2CSK218692R0002**	2CSK218692R0002	1
White	Blind	**2CSK207272R0003**	2CSK207272R0003	1

Light switches and socket outlets

Chiara Antibacterial

Pull-cord push button 1P

16A, NO, antibacterial

Colour	Type	Order code	Pack/Qty.
White		2CSK207262R1020	8

1 way switch 1P

16AX, antibacterial

Colour	Type	Order code	Pack/Qty.
White		2CSK207242R1001	16

2 way switch 1P

16AX, antibacterial

Colour	Type	Order code	Pack/Qty.
White		2CSK207222R1003	16

Intermediate switch 1P

16AX, antibacterial

Colour	Type	Order code	Pack/Qty.
White		2CSK226732R1010	16

Blank module 1M

antibacterial

Colour	Type	Order code	Pack/Qty.
White		2CSK226692R1601	3

Socket outlet 2P+E

16A, P30/P17 antibacterial

Colour	Type	Order code	Pack/Qty.
White		2CSK226652R1109	8

Socket outlet 2P+E

10/16A, red antibacterial

Colour	Type	Order code	Pack/Qty.
Red		2CSK226642R1104	16

Socket outlet 2P+E

16A, P30/P17 red antibacterial

Colour	Type	Order code	Pack/Qty.
Red		2CSK229932R1110	8

Socket outlet 2P+E

16A, P17/P11 antibacterial

Colour	Type	Order code	Pack/Qty.
White		2CSK229922R1103	16

TV socket outlet

direct, male, antibacterial

Colour	Type	Order code	Pack/Qty.
White		2CSK229902R1118	8

Socket connector

Socket connector for the operator push button. Studied on the Chiara solution

Colour	Type	Order code	Pack/Qty.
White	**AC-144/7-AB**	2CSH258195R2014	1

Module with buzzer

Module with buzzer and red light to show the caller position in the room

Colour	Type	Order code	Pack/Qty.
White	**BUZZ-144-AB**	2CSH258235R2001	1

Unno
The perfect combination

It will be hard for you to decide. From the elegant Soft Black, to the versatile White, through the daring Mandarin, Mint, Mustard... The wide variety of colors in the Unno series is the key when it comes to set up a vital home, full of light and harmony. Design, technology, respect for the environment, versatility and beauty. Unno makes its way through an extensive range of tones capable of fully personalizing any space or environment. Thinking of meeting your expectations in decoration and style, Unno is your winning bet.

Unno
Dare with color!

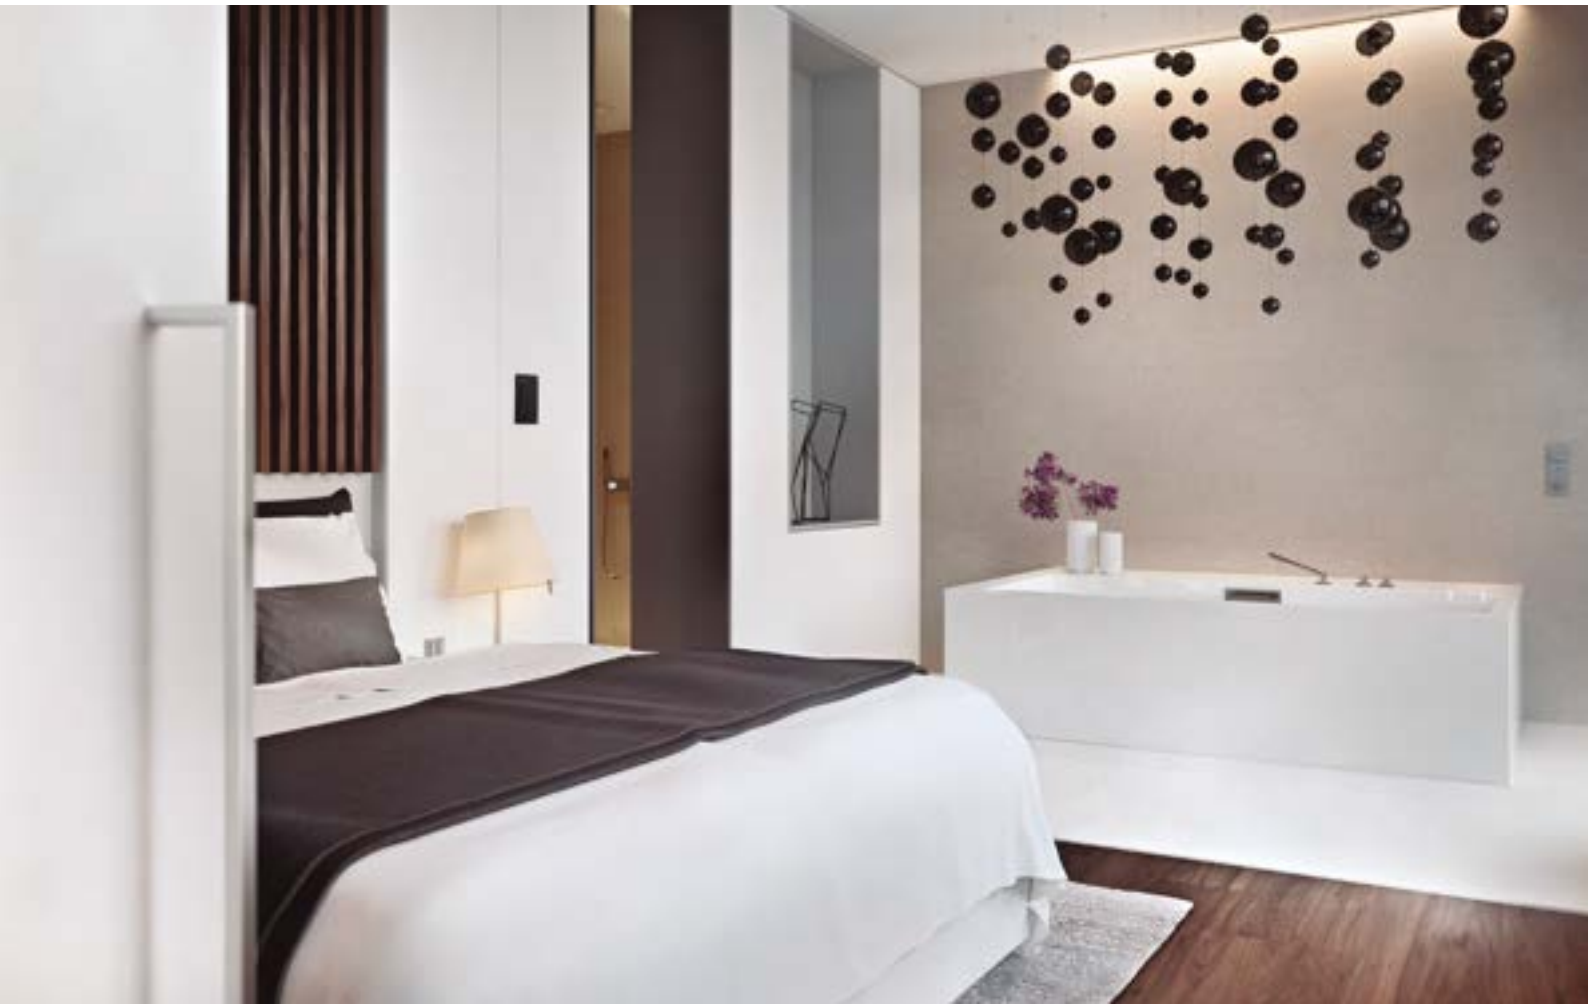

Unno's new Black Soft finish allows it to adapt to a wide range of decorative styles.
From the most transgressive trends that combine black with colors such as lilac or mustard, to the most contemporary interior design that is increasingly present in new constructions and renovation works, both in residential and commercial spaces.

Quality and design within everyone’s reach

The Unno range with its colours, straight lines and its simple design brings personality to your home, while offering a unique and contemporary look.

Unno is versatility that matches your style.

We offer an elegant range, incorporating high technology while respecting the environment. We now know it is possible to align beauty, functionality, quality and sustainability, while placing great design within reach of all.

Unno is design

Its straight lines and simplicity provide an elegant and contemporary look; added to the colours that adapt to all the latest trends. With different side finishes, Unno is the perfect combination, bringing life to covers and switches, and ultimately, to your home.

Unno is technology

ABB's experience over the years can now be seen in the new mechanisms: manufactured using raw materials within the guidelines proposed by international environmental protection organisations such as (RoHS, IEC, INMETRO), the Unno switches are the most ideal for new energy saving light bulbs, incorporating childproofing in the 2P + T connections in all their products.

Unno is versatile

Only ABB has been able to create a range that comes with all the benefits of the highest quality, adapted to market needs in relation to both design as well as ease of installation and safety. Unno is versatility that matches your style.

Unno is Ecodesign

Unno reduces the impact on the environment in each of the processes of design, production, logistics, sale, use and recycling. Niessen was the first brand to offer an eco-designed series of plates and dampers.
Always concerned about social welfare through the use of new technologies, he is present in the construction of a better world for future generations.

AENOR
ECODISEÑO
ISO 14006

These are some of the improvements in the environment that Unno presents:

- Unno's signal lights, based on LED technology, represent savings in energy consumption of 80%, and their life is extended up to ten years.
- Recyclable packaging, and optimized to make the most of your space.
- The materials used in the Unno series are recyclable and reusable.
- Optimization of raw materials and consequent energy savings in manufacturing processes.
- The Unno series has been designed according to the requirements of the Environmental Management Standard ISO14006.

Peace of mind at home
Quality in technical design

Innovating for the well-being of people. It is not supported for the experience that Niessen has acquired after more than 100 years, during which it has built a great prestige around the development of new products, technology, improvement of electrical installations, user safety and high quality materials.
The colors that this series offers give life and exclusivity to the home.
Being Unno a series of minimalist aesthetics, with straight and simple lines, the combination of colors in its plates makes each piece have its own personality, thus creating fully customized environments.

Unno is versatility and adaptability
Because it offers a wide variety of colors

Mounting plates finishes in:

BL White
NG Black
GP Gray
MS Mustard
CT Chocolate
MD Tangerine
AR Blueberry
LL Lilac
MN Mint
CM Caramel
AZ Blue

Device finishes in:

BL White
BN White/Black
NS Soft Black

Frame finishes in:

BL White
NS Soft Black
MS Mustard
CT Chocolate
MD Tangerine
AR Blueberry
LL Lilac
MN Mint
CM Caramel
AZ Blue

For tastes, the colors. Unno offers more than 300 combinations of possible finishes to adapt to any space, decorative style or preference.
Frames in 10 finishes, aesthetic mounting plates with 11 finishes and devices in three finishes.
Unno offers versatility and adaptability without forgetting about design.

All its uses
Maximum quality and guarantee

New mechanism design

Now with capacity for currents up to 16A. Switches that also comply with the latest revision of the international standard IEC 60669-1, which requires supporting LED loads of up to 200 W. All this while maintaining all the benefits that Unno switches have offered since their launch: functionality and simplicity that allows connections to be made safely with the usual uses of the market, avoiding in all cases direct and indirect contacts. 46mm key. x 22mm. and the height of the mechanism of 27 mm.

Robust mechanism design

Contact function via indirect swaying and forced shut-off. This system offers robustness and durability, increasing its useful life.

Advanced connection

The direct contact connection system prevents the cable from moving, keeping it in place despite the temperature, movement or passing of time affecting the connection.

Safety

All the products in the Unno range come with childproofing measures ensuring everybody's safety, including children under the most adverse conditions, complying with ABNT NBR 60884-1:2004 + decree 085 regulations: 03-04-2006 and NBR 14136:2002.

Reinforced mounting

With exclusive mounting system that prevents it from becoming displaced or sunken. Manufactured from polycarbonate, a hard wearing and rigid material.

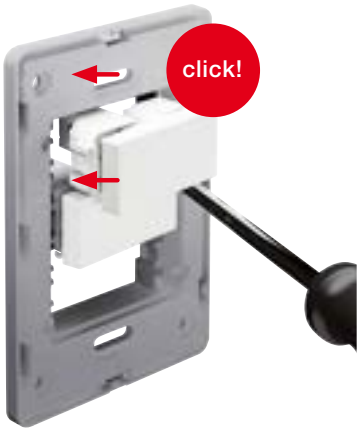

Rapid connection

Extraction and front setting mechanism. Two installation options that ensure mechanisms are perfectly aligned:
1. Mounting assembly and subsequent connection
2. Connection and subsequent mounting assembly

Visibility

White LED lighting offer higher luminosity. Energy savings.
Up to 80% longer lasting.

Wide range of functions

Solutions for any type of project: multiple types of socket outlets, USB chargers, dimmers, voice, data and image sockets, etc.

Segurança

Unno

Switches

Switch 1-gang, 1-way, SP - 1 M

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screw terminals.
Optional: locator LED lamp N1191 BL.

Colour	Type	Order code	Pack/Qty.
White	**N1101 BL**	2CLA110101N1103	30
White/Black	**N1101 BN**	2CLA110101N1803	30
Soft Black	**N1101 NS**	2CLA110101N1503	30

Switch 1-gang, 2-way, SP - 1 M

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screw terminals.
Optional: locator LED lamp N1191 BL.

Colour	Type	Order code	Pack/Qty.
White	**N1102 BL**	2CLA110201N1103	30
White/Black	**N1102 BN**	2CLA110201N1803	30
Soft Black	**N1102 NS**	2CLA110201N1503	30

Switch 1-gang, intermediate, SP - 1 M

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screw terminals.

Colour	Type	Order code	Pack/Qty.
White	**N1110 BL**	2CLA111001N1103	30
White/Black	**N1110 BN**	2CLA111001N1803	30
Soft Black	**N1110 NS**	2CLA111001N1503	30

Switch 1-gang, 1-way, DP - 1 M

Rated voltage: 110 - 250 Vac.
Rated current: 20 AX.
Rated power iLED (230/127 Vac): 250/150 W.
Screw terminals.

Colour	Type	Order code	Pack/Qty.
White	**N1101.7 BL**	2CLA110170N1103	5
White/Black	**N1101.7 BN**	2CLA110170N1803	5
Soft Black	**N1101.7 NS**	2CLA110170N1503	5

Locator & indicator lamp

Suitable for all the switches and push buttons.
White light.
Rated voltage: 110 - 250 Vac.
Rear connection with 2 cables.
Rated current: <0,2 mA.
Specially designed for CFL and LED lamps.

Colour	Type	Order code	Pack/Qty.
White	**N1191 BL**	2CLA119100N1003	10

Switches with locator/indicator light

Switch 1-gang, 1-way, SP - 1 M

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screw terminals.
Included: locator LED lamp N1191 BL.

Colour	Type	Order code	Pack/Qty.
White	**N1101.3 BL**	2CLA110131N1103	30
White/Black	**N1101.3 BN**	2CLA110131N1803	30
Soft Black	**N1101.3 NS**	2CLA110131N1503	30

Switch 1-gang, 2-way, SP - 1 M

Rated voltage: 110 - 250 Vac.
Rated current: 16 AX.
Rated power iLED (230/127 Vac): 200/100 W.
Screw terminals.
Included: locator LED lamp N1191 BL.

Colour	Type	Order code	Pack/Qty.
White	**N1102.3 BL**	2CLA110231N1103	30
White/Black	**N1102.3 BN**	2CLA110231N1803	30
Soft Black	**N1102.3 NS**	2CLA110231N1503	30

Pushbuttons

Push-button, SP with bell symbol - 1M

Rated voltage: 110 - 250 Vac.
Rated current: 16 A.
Screw terminals.
Optional: locator LED lamp N1191 BL.

Colour	Type	Order code	Pack/Qty.
White	**N1104 BL**	2CLA110401N1103	30
White/Black	**N1104 BN**	2CLA110401N1803	30
Soft Black	**N1104 NS**	2CLA110401N1503	30

Push-button, SP without symbol - 1M

Rated voltage: 110 - 250 Vac.
Rated current: 16 A.
Screw terminals.
Optional: locator LED lamp N1191 BL.

Colour	Type	Order code	Pack/Qty.
White	**N1104.7 BL**	2CLA110471N1103	30
White/Black	**N1104.7 BN**	2CLA110471N1803	30
Soft Black	**N1104.7 NS**	2CLA110471N1503	30

Unno
Dimmers

Rotatory/push dimmer 127V - 1M

Rated voltage: 110 - 127 Vac.
Incandescent lamps: 50 - 500 W.
Halogen lamps: 50 - 500 W.
Overload and short-circuit protection with fuse (Not resetable).

Colour	Type	Order code	Pack/Qty.
White	**N1160 BL**	2CLA116000N1103	10
Soft Black	**N1160 NS**	2CLA116000N1503	10

Rotatory/push dimmer 220V - 2M

Rated voltage: 220 - 230 Vac.
Incandescent lamps: 50 - 700 W.
Halogen lamps: 50 - 700 W.
Overload and short-circuit protection with fuse (Not resetable).

Colour	Type	Order code	Pack/Qty.
White	**N1160.1 BL**	2CLA116010N1103	10
Soft Black	**N1160.1 NS**	2CLA116010N1503	10

Rotatory LED Triac dimmer - 1M

Rated voltage: 110 - 230 Vac. Frequency: 50/60 Hz
Power min. load: 3 W. Power max. load (127 / 230 Vac):
- LEDi: 50 / 100 W (max. 10 lamps).
- LEDi with LC transformer: 50 / 100 W (max. 10 lamps).
- Halogen with LC transformer: 100 / 200 W.
- Incandescent lamps: 150 / 250 W.

2 wire connection.
OFF position

Colour	Type	Order code	Pack/Qty.
White	**N1160.2 BL**	2CLA116020N1103	1
Soft Black	**N1160.2 NS**	2CLA116020N1503	1

LED/Universal rotatory dimmer 220V - 1M

Rated voltage: 230 Vac ± 10%. Frequency: 50-60 Hz.
Power (min./max load):
- LEDi (trailing-edge lamps): 4 / 250 W/VA.
- LEDi (leading-edge lamps): 4 / 60 W/VA.*
- LV LEDi with transformer type C: 4 / 250 W/VA.
- LV LEDi with transformer type LC: 4 / 60 W/VA.*
- LV halogen with transformer type C: 4 / 250 W/VA.
- LV halogen with transformer type LC: 4 / 250 W/VA.
- Incandescent lamps: 4 / 250 W/VA.
- Halogen lamps: 4 / 250 W/VA.

*Max. 10 lamps.
Load selection
2 or 3 wire connection.
OFF position

Colour	Type	Order code	Pack/Qty.
White	**N1160.3 BL**	2CLA116030N1103	1
Soft Black	**N1160.3 NS**	2CLA116030N1503	1

LED/Universal rotatory dimmer 110V - 1M

Rated voltage: 127 Vac ± 10%. Frequency: 60 Hz.
Power (min./max load):
- LEDi (trailing-edge lamps): 4 / 125 W/VA.
- LEDi (leading-edge lamps): 4 / 30 W/VA.*
- LV LEDi with transformer type C: 4 / 125 W/VA.
- LV LEDi with transformer type LC: 4 / 30 W/VA.*
- LV halogen with transformer type C: 4 / 125 W/VA.
- LV halogen with transformer type LC: 4 / 125 W/VA.
- Incandescent lamps: 4 / 125 W/VA.
- Halogen lamps: 4 / 125 W/VA.

*Max. 10 lamps.
Load selection
2 or 3 wire connection.
OFF position.

Colour	Type	Order code	Pack/Qty.
White	**N1160.8 BL**	2CLA116080N1103	1
Soft Black	**N1160.8 NS**	2CLA116080N1503	1

Blind control

Push-button blind control 1-gang - 1M

Rated voltage: 110 - 250 Vac.
Rated current: 6A.
Miniswitch.
Direct control

Colour	Type	Order code	Pack/Qty.
White	**N1144 BL**	2CLA114400N1103	10
Soft Black	**N1144 NS**	2CLA114400N1503	10

Switch blind control 1-gang - 1M

Rated voltage: 110 - 250 Vac.
Rated current: 6A.
Miniswitch.
Direct control.

Colour	Type	Order code	Pack/Qty.
White	**N1144.1 BL**	2CLA114410N1103	10
Soft Black	**N1144.1 NS**	2CLA114410N1503	10

Unno
Socket outlets

Schuko socket outlet - 2M



Rated voltage: 250 Vac.
Rated current: 16A.
Type F: 2P + E.
Shuttered for child safety.
Screw terminals.

Colour	Type	Order code	Pack/Qty.
White	**N1288 BL**	2CLA128800N1103	10
Soft Black	**N1288 NS**	2CLA128800N1503	10
Red	**N1288 RJ**	2CLA128800N7003	10

American earthed socket outlet - 1M

Rated voltage: 125 Vac.
Rated current: 15 A.
Type B: 2P + E / NEMA 5-15R.
Shuttered for child safety.
Screw terminals.

Colour	Type	Order code	Pack/Qty.
White	**N1128 BL**	2CLA112800N1103	30
Soft Black	**N1128 NS**	2CLA112800N1503	30

American earthed duplex socket outlet - 3M

Rated voltage: 125 Vac.
Rated current: 15 A.
Type B: 2P + E / NEMA 5-15R.
Duplex outlet.
Shuttered for child safety.
Screw terminals.

Colour	Type	Order code	Pack/Qty.
White	**N1328 BL**	2CLA132800N1103	20
Soft Black	**N1328 NS**	2CLA132800N1503	20

Brazilian 10A socket outlet - 1M

Rated voltage: 110 - 250 Vac.
Rated current: 10 A.
Type N: 2P + E.
Shuttered for child safety.
Screw terminals.

Colour	Type	Order code	Pack/Qty.
White	**N1136 BL**	2CLA113600N1104S	20
Red	**N1136 RJ**	2CLA113620N7004S	20

Brazilian 20A socket outlet - 1M

Rated voltage: 110 - 250 Vac.
Rated current: 20 A.
Type N: 2P + E.
Shuttered for child safety.
Screw terminals.

Colour	Type	Order code	Pack/Qty.
White	**N1136.2 BL**	2CLA113620N1104S	20
Red	**N1136.2 RJ**	2CLA113620N7004S	20

Euro-American unearthed socket outlet - 1M

Rated voltage: 125 / 250 Vac.
Rated current: 15 / 16A.
Type A+C: 2P (non-earthed) / NEMA 1-15R.
Screw terminals.

Colour	Type	Order code	Pack/Qty.
White	**N1135 BL**	2CLA113500N1103	30
Soft Black	**N1135 NS**	2CLA113500N1503	30

Euro-American earthed socket outlet - 1M

Rated voltage: 110 - 250 Vac.
Rated current: 15 / 16 A.
Type B+C: 2P + E / NEMA 5-15R.
Shuttered for child safety.
Screw terminals.

Colour	Type	Order code	Pack/Qty.
White	**N1138 BL**	2CLA113800N1103	30
Soft Black	**N1138 NS**	2CLA113800N1503	30

Euro-American earthed duplex socket outlet - 3M

Rated voltage: 110 - 250 Vac.
Rated current: 15 / 16 A.
Type B+C: 2P + E / NEMA 5-15R.
Shuttered for child safety.
Screw terminals.

Colour	Type	Order code	Pack/Qty.
White	**N1338 BL**	2CLA133800N1103	20
Soft Black	**N1338 NS**	2CLA133800N1503	20

Unno

USB chargers

USB charger type-A+C 10,5W - 1M

Input: 100 - 240 Vac ±10 %; 50/60 Hz. Max. 0,25 A.
Output (maximum power: 10,5 W):
- USB-A: 5 Vdc (max. 2,1 A).
- USB-C: 5 Vdc (max. 2,1 A).
- USB-A+C: 5 Vdc (total max. 2,1 A).
MFi 2,1A, BC 1.2, DCP 5V/1,5A.
Stand-by power consumption: <= 70 mW.
Energy efficiency: > 83 %.

Colour	Type	Order code	Pack/Qty.
White	**N1185.3 BL**	2CLA118530N1101	1
Soft Black	**N1185.3 NS**	2CLA118530N1501	1

USB charger type-A+C 15W - 1M

Input: 100 - 240 Vac ±10 %; 50/60 Hz. Max. 0,35 A.
Output (maximum power: 15 W):
- USB-A: 5 Vdc (max. 2,4 A).
- USB-C: 5 Vdc (max. 3 A).
- USB-A+C: 5 Vdc (total max .3 A).
USB-C, DFP 5V/3A, MFi 2,4A, BC 1.2, DCP 5V/1,5A.
Stand-by power consumption: <= 70 mW.
Energy efficiency: > 86%.

Colour	Type	Order code	Pack/Qty.
White	**N1185.4 BL**	2CLA118540N1101	1
Soft Black	**N1185.4 NS**	2CLA118540N1501	1

TV outlets

TV terminal outlet F-type - 1M

Single TV outlet - Dead-end.
F type.
For 75Ω impedance coaxial cable.
Frequency range: 0 - 2.000 Mhz.
Working voltage: 250 VRMS max.
Dielectric withstanding voltage: 500 VRMS min.
Contact resistance:
- 5 mΩ max. (center contact).
- 2 mΩ max. (outer contact).
Insulator resistance: 1.000 MΩ min.

Colour	Type	Order code	Pack/Qty.
White	**N1150 BL**	2CLA115000N1103	10
Soft Black	**N1150 NS**	2CLA115000N1503	10

TV terminal outlet M-type - 1M

Single TV outlet - Dead-end.
M type - 9,52 mm. male.
For 75 Ω impedance coaxial cable.
Frequency range: 5 - 862 Mhz.
Output loss: 0,5 dB.

Colour	Type	Order code	Pack/Qty.
White	**N1150.7 BL**	2CLA115070N1103	10

TV/SAT terminal outlet - 1M

Single TV outlet - dead-end.
- TV: M type - 9,52 mm. male.
- SAT: F type - female.
For 75 Ω impedance coaxial cable.
Frequency range (TV / SAT):
5 - 862 Mhz / 950 - 2.400 MHz.
Output loss (TV / SAT): 1 dB / 1 dB.
DC path (Vdc / mA / Tono):
34 max. / 500 max. / 22kHz - DiSEqC.

Colour	Type	Order code	Pack/Qty.
White	**N1151.7 BL**	2CLA115170N1103	10

Unno

Telephone outlets

Telephone outlet RJ11 - 1M

RJ11 type connector.
4 contacts.
Suitable for 2 or 4 contacts jack.
Screw terminals.

Colour	Type	Order code	Pack/Qty.
White	**N1117 BL**	2CLA111700N1103	10
Soft Black	**N1117 NS**	2CLA111700N1503	10

Data outlets

Data outlet RJ45 Cat.5e UTP

RJ45 type connector.
Cat.5e UTP.
In compliance with ANSI/TIA/EIA 568B.2, ISO/IEC11801 & EN50173.
Universal TIA/EIA 568A and 568B labeling.
Housing: ABS UL-94-0.
Durability: 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4).
IDC: PC UL94V-0, Accept 22-26AWG solid wire.
Contact: RJ45 8P8C, 3~50 micro-inch gold plating over nickel plated on contact area.
Tool-less wiring.

Colour	Type	Order code	Pack/Qty.
White	**N1118.5 BL**	2CLA111850N1103	10
Soft Black	**N1118.5 NS**	2CLA111850N1503	10

Data outlet RJ45 Cat.6 UTP

RJ45 type connector.
Cat.6 UTP.
In compliance with ANSI/TIA/EIA 568B.2, ISO/IEC11801 & EN50173.
Universal TIA/EIA 568A and 568B labeling.
Housing: ABS UL-94-0.
Durability: 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4).
IDC: PC UL94V-0, Accept 22-26AWG solid wire.
Contact: RJ45 8P8C, 3~50 micro-inch gold plating over nickel plated on contact area.
Tool-less wiring.

Colour	Type	Order code	Pack/Qty.
White	**N1118.6 BL**	2CLA111860N1103	10
Soft Black	**N1118.6 NS**	2CLA111860N1503	10

VDI outlets

2x RCA connection unit - 1M

Front: 2x RCA connectors (Red / White).
Rear: screw terminals (4 wires).

Colour	Type	Order code	Pack/Qty.
White	**N1155.2 BL**	2CLA115520N1103	1
Soft Black	**N1155.2 NS**	2CLA115520N1503	1

3x RCA connection unit - 1M

Front: 3x RCA connectors (Red / White / Yellow).
Rear: screw terminals (6 wires).

Colour	Type	Order code	Pack/Qty.
White	**N1155.3 BL**	2CLA115530N1103	1
Soft Black	**N1155.3 NS**	2CLA115530N1503	1

Mini-Jack connection unit - 1M

Front: 1x Mini-Jack connector (3,5 mm. stereo audio jack).
Rear: screw terminals (3/4 wires).

Colour	Type	Order code	Pack/Qty.
White	**N1155.4 BL**	2CLA115540N1103	1
Soft Black	**N1155.4 NS**	2CLA115540N1503	1

VGA connection unit - 1M

Front: 1x VGA connector (DE-15 connector).
Rear: screw terminals (15 wires).

Colour	Type	Order code	Pack/Qty.
White	**N1155.5 BL**	2CLA115550N1103	1
Soft Black	**N1155.5 NS**	2CLA115550N1503	1

HDMI connection unit - 1M

Front: 1x HDMI connector (Type A connector).
Rear: screwless terminals (20 wires).

Colour	Type	Order code	Pack/Qty.
White	**N1155.6 BL**	2CLA115560N1103	1
Soft Black	**N1155.6 NS**	2CLA115560N1503	1

Unno

VDI outlets

HDMI female-female connection unit - 1M

Front: 1x HDMI connector (Type A connector).
Rear: 1x HDMI connector (Type A connector) fitted at 90º angle.

Colour	Type	Order code	Pack/Qty.
White	**N1155.7 BL**	2CLA115570N1103	1
Soft Black	**N1155.2 NS**	2CLA115520N1503	1

USB connection unit - 1M

Front: 1x USB 2.0 connector (Type A connector).
Rear: screwless terminals (5 wires).

Colour	Type	Order code	Pack/Qty.
White	**N1155.8 BL**	2CLA115580N1103	1
Soft Black	**N1155.8 NS**	2CLA115580N1503	1

USB female-female connection unit - 1M

Front: 1x USB 2.0 connector (Type A connector).
Rear: 1x USB 2.0 connector (Type A connector) fitted at 90º angle.

Colour	Type	Order code	Pack/Qty.
White	**N1155.9 BL**	2CLA115590N1103	1
Soft Black	**N1155.9 NS**	2CLA115590N1503	1

HDMI female-female connection unit with cable - 1M

Front: 1x HDMI connector (Type A connector).
Rear: 1x HDMI connector (Type A connector) with 20 cm cable extension.

Colour	Type	Order code	Pack/Qty.
White	**N1155.71 BL**	2CLA115571N1103	1
Soft Black	**N1155.71 NS**	2CLA115571N1503	1

USB female-female connection unit with cable - 1M

Front: 1x HDMI connector (Type A connector).
Rear: 1x HDMI connector (Type A connector) with 20 cm cable extension.

Colour	Type	Order code	Pack/Qty.
White	**N1155.91 BL**	2CLA115591N1103	1
Soft Black	**N1155.91 NS**	2CLA115591N1503	1

Buzzer

Buzzer - 1M

Rated voltage: 110 - 230 Vac.
Sound level at 1 meter: 75dB.
Adjustable volume with screwdriver.

Colour	Type	Order code	Pack/Qty.
White	**N1119 BL**	2CLA111900N1103	10
Soft Black	**N1119 NS**	2CLA111900N1503	10

Blank covers / Cable outlets

Cable outlet - 1M

Includes a clamp to fix the cable.

Colour	Type	Order code	Pack/Qty.
White	**N1107 BL**	2CLA110700N1103	10
Soft Black	**N1107 NS**	2CLA110700N1503	10

Blank cover - 1M

Colour	Type	Order code	Pack/Qty.
White	**N1100 BL**	2CLA110000N1103	20
Soft Black	**N1100 NS**	2CLA110000N1503	20

Unno

Frames for 3M (4"×2"), 4M, 7M and 4"×4" boxes

Frames with ABB logo

01

02

03

04

05

06

07

08

09

10

1 to 3 module cover frames for 3 module or 4"×2" box vertical installation habits (American)
01 Frame blank for 3 modules box
02 Frame 1 module for 3 modules box
03 Frame 1 + 1 modules for 3 modules box
04 Frame 2 modules for 3 modules box
05 Frame 3 modules in 3 modules box

3+3 module cover frames for 4"×4" box installation habit (American and Eastern Asia)
06 Frame blank for 4"×4" box
07 Frame 1 + 1 modules for 4"×4" box
08 Frame 2 + 2 modules for 4"×4" box
09 Frame 1 + 1 + 1 + 1 modules for 4"×4" box
10 Frame 3 + 3 modules for 4"×4" box

1 to 7 module cover frames for 3, 4 and 7 module box horizontal installation habit (Italian)
11 Frame 1 module for 3 modules box
12 Frame 2 modules for 3 modules box
13 Frame 3 modules in 3 modules box
14 Frame 4 modules for 4 modules box
15 Frame 7 modules in 7 modules box

Frames with Niessen logo

11

12

13

14



15

Unno

Frames

Mounting plates

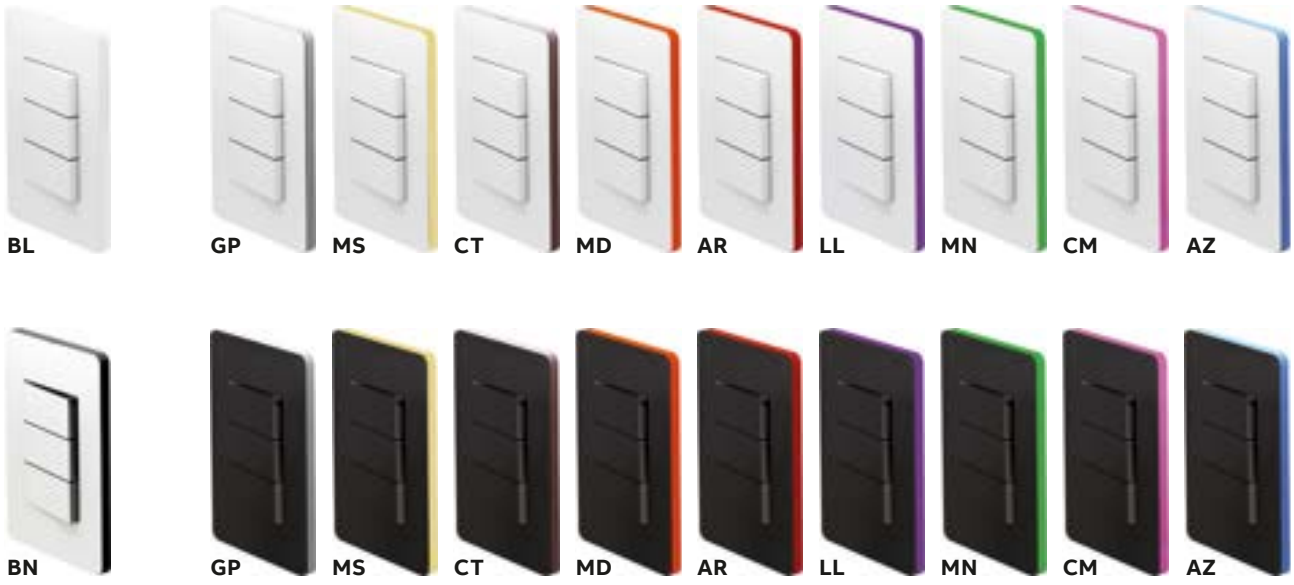

BL Blanco
NS Negro Soft

BN Blanco-Negro
GP Gris Plata

MS Mostaza
CT Chocolate

MD Mandarina
AR Arándano

LL Lila
MN Menta

CM Caramelo
AZ Azul

Unno

Frames with ABB logo

Frames - 3 and 3+3 modules

Material: polycarbonate
Size (height × width):
- 3M: 115 × 80 mm.
- 3+3M: 115 × 128 mm.

Mounting plate codes:
- For 3M box (83.5 mm screw distance): N1373.9.
- For 3+3M box (4"×4" type box): N1673.9.

White

Colour		Type	Order code	Pack/Qty.
3M		**N1370.1 BL**	2CLA137010N1104S	20
3M	2	**N1372.1 BL**	2CLA137210N1104S	20
3M	1+1	**N1372.2 BL**	2CLA137220N1104S	20
3M	3	**N1373.1 BL**	2CLA137310N1104S	20
3M		**N1670 BL**	2CLA167000N1104S	10
3+3M	1+1	**N1671.1 BL**	2CLA167110N1104S	10
3+3M	1	**N1371.1 BL**	2CLA137110N1104S	20
3+3M	2+Ł2	**N1672.2 BL**	2CLA167220N1104S	10
3+3M	1+1+1+1	**N1672.4 BL**	2CLA167240N1104S	10
3+3M	3+3	**N1673.6 BL**	2CLA167360N1104S	10

Frames with Niessen logo

Frames - 3, 4 and 7 modules

Material: polycarbonate
Size (height x width): 3M: 115 × 80 mm.
4M: 137 × 80 mm. 7M: 205 × 90 mm.

Mounting plate codes:
For 3M box (83.5 mm screw distance): N1373.9.
For 4M box (107 mm screw distance): N1474.9.
For 7M box (100 mm screw distance): N1777.9.

White

Colour		Type	Order code	Pack/Qty.
3M	1	**N1371 BL**	2CLA137100N1103	24
3M	2	**N1372 BL**	2CLA137200N1103	24
3M	3	**N1373 BL**	2CLA137300N1103	24
4M	4	**N1474 BL**	2CLA147400N1103	20
7M	7	**N1777 BL**	2CLA177700N1103	12

Mustard

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373 MS**	2CLA137300N2103	24
4M	4	**N1474 MS**	2CLA147400N2103	20
7M	7	**N1777 MS**	2CLA177700N2103	12

Chocolate

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373 CT**	2CLA137300N2603	24
4M	4	**N1474 CT**	2CLA147400N2603	20
7M	7	**N1777 CT**	2CLA177700N2603	12

Tangerine

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373 MD**	2CLA137300N2503	24
4M	4	**N1474 MD**	2CLA147400N2503	20
7M	7	**N1777 MD**	2CLA177700N2503	12

Blueberry

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373 AR**	2CLA137300N2403	24
4M	4	**N1474 AR**	2CLA147400N2403	20
7M	7	**N1777 AR**	2CLA177700N2403	12

Lilac

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373 LL**	2CLA137300N2303	24
4M	4	**N1474 LL**	2CLA147400N2303	20
7M	7	**N1777 LL**	2CLA177700N2303	12

Mint

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373 MN**	2CLA137300N2203	24
4M	4	**N1474 MN**	2CLA147400N2203	20
7M	7	**N1777 MN**	2CLA277700N2203	12

Caramel

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373 CM**	2CLA137300N2703	24
4M	4	**N1474 CM**	2CLA147400N2703	20
7M	7	**N1777 CM**	2CLA177700N2703	12

Blue

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373 AZ**	2CLA137300N2003	24
4M	4	**N1474 AZ**	2CLA147400N2003	20
7M	7	**N1777 AZ**	2CLA177700N2003	12

Unno

Mounting plates

Mounting plates - 3, 4, 7 and 3+3 modules

With colored decorative contour.
Material: polycarbonate
Size (height x width):
- 3M: 115 × 80 mm.
- 4M: 137 × 80 mm.
- 7M: 205 × 90 mm.
- 3+3M: 115 × 128 mm.

Frame codes:
- For 3M mounting plates: N137X.X.
- For 4M mounting plates: N1474.
- For 7M mounting plates: N1777.

White

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373.9 BL**	2CLA137390N1103	24
4M	4	**N1474.9 BL**	2CLA147490N1103	20
7M	7	**N1777.9 BL**	2CLA177790N1103	12
3+3M	3+3	**N1673.9 BL**	2CLA167390N1104S	10

Black

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373.9 NG**	2CLA137390N1503	24
4M	4	**N1474.9 NG**	2CLA147490N1503	20
7M	7	**N1777.9 NG**	2CLA177790N1503	12
3+3M	3+3	**N1673.9 NG**	2CLA167390N1504S	10

Gray

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373.9 GR**	2CLA137390N1303	24
4M	4	**N1474.9 GR**	2CLA147490N1303	20
7M	7	**N1777.9 GR**	2CLA177790N1303	12
3+3M	3+3	**N1673.9 GR**	2CLA167390N1304S	10

Mustard

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373.9 MS**	2CLA137390N2103	24
4M	4	**N1474.9 MS**	2CLA147490N2103	20
7M	7	**N1777.9 MS**	2CLA177790N2103	12
3+3M	3+3	**N1673.9 MS**	2CLA167390N2104S	10

Chocolate

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373.9 CT**	2CLA137390N2603	24
4M	4	**N1474.9 CT**	2CLA147490N2603	20
7M	7	**N1777.9 CT**	2CLA177790N2603	12
3+3M	3+3	**N1673.9 CT**	2CLA167390N2604S	10

Tangerine

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373.9 MD**	2CLA137390N2503	24
4M	4	**N1474.9 MD**	2CLA147490N2503	20
7M	7	**N1777.9 MD**	2CLA177790N2503	12
3+3M	3+3	**N1673.9 MD**	2CLA167390N2504S	10

Blueberry

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373.9 AR**	2CLA137390N2403	24
4M	4	**N1474.9 AR**	2CLA147490N2403	20
7M	7	**N1777.9 AR**	2CLA177790N2403	12
3+3M	3+3	**N1673.9 AR**	2CLA167390N2404S	10

Lilac

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373.9 LL**	2CLA137390N2303	24
4M	4	**N1474.9 LL**	2CLA147490N2303	20
7M	7	**N1777.9 LL**	2CLA177790N2303	12
3+3M	3+3	**N1673.9 LL**	2CLA167390N2304S	10

Mint

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373.9 MN**	2CLA137390N1303	24
4M	4	**N1474.9 MN**	2CLA147490N1303	20
7M	7	**N1777.9 MN**	2CLA177790N1303	12
3+3M	3+3	**N1673.9 MN**	2CLA167390N1304S	10

Caramel

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373.9 CM**	2CLA137390N2103	24
4M	4	**N1474.9 CM**	2CLA147490N2103	20
7M	7	**N1777.9 CM**	2CLA177790N2103	12
3+3M	3+3	**N1673.9 CM**	2CLA167390N2104S	10

Blue

Colour		Type	Order code	Pack/Qty.
3M	3	**N1373.9 AZ**	2CLA137390N2603	24
4M	4	**N1474.9 AZ**	2CLA147490N2603	20
7M	7	**N1777.9 AZ**	2CLA177790N2603	12
3+3M	3+3	**N1673.9 AZ**	2CLA167390N2604S	10

Origen

Innovation and elegance within everyone's reach

Light is an essential element for the design of our living spaces: the foundation of Comfort. It's important to magnify it and make it the main character in every living space. Origen is a new series of light switches for any home or commercial building.

Discover its new range of innovative, integrated functions, for guaranteed quick, fool-proof installation and increased well-being and comfort.

ABB's roots lie more than 100 years in the innovation of materials and the aesthetic research for increasingly performing light switches.

Personal safety, damage prevention for connected appliances and protection for your home and loved ones: **Origen stands for innovation, our mission since our origins.**

—

Origen.
Elegance and functionality for our living spaces

Design and performance from our origins
Efficacy and reliability in a lightweight design

Simple and flexible - the essentials of design. A range of finishes, with stylishly curved lines and surfaces. Origen satisfies your requirements for beauty, reliability and ease of installation.

—
01

—
02

—
03

—
01. 6 frames color

—
02. Origen is just 8.5 mm deep

—
03. Multiple color combinations

—

Timeless design
Origen's 8.5 mm deep profile, curved surface and soft border give the frame a lightweight, floating look.

—

Simplicity with quality
High quality, durable frame finishes in 6 colour options.

—

Modern texture
Enhancing elegance within a room with modern, textured rockers, available in white and black.

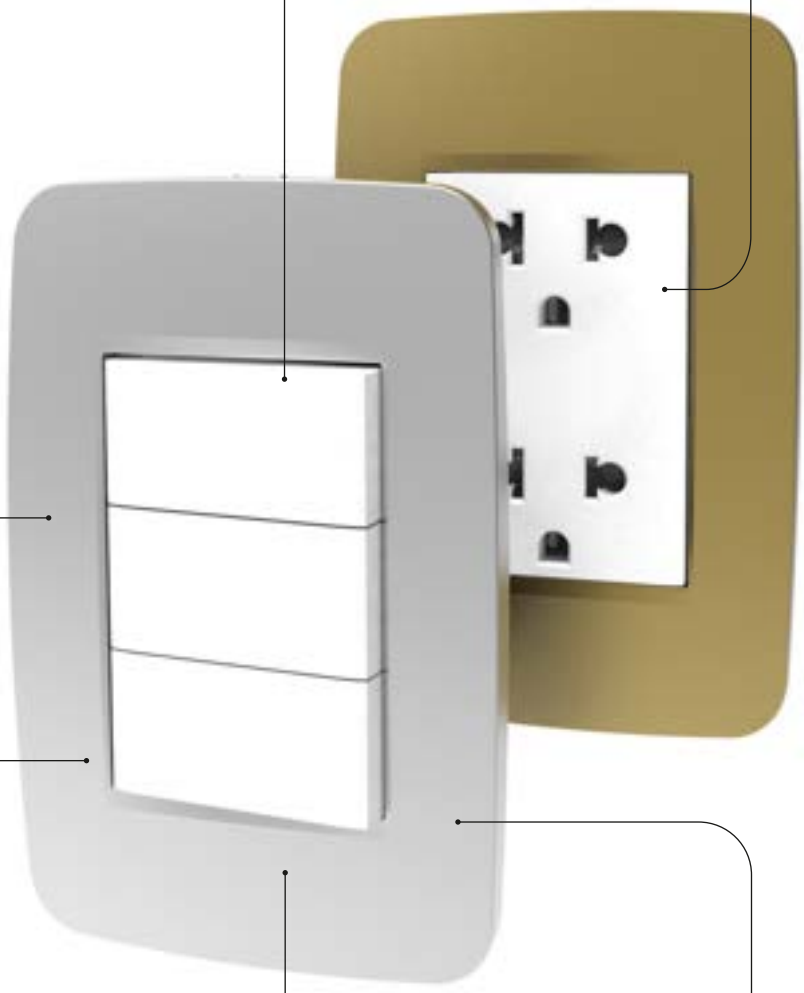

—

Easy installation
Front and rear installation with screwless and screw/nut type terminals.

—

Suitable for any need
Residential and commercial buildings. Multiple frame types, including IP55 protection degree. Innovative dimmers and USB chargers.
More than 70 functions.

—

Multi-standard
4" x 2" and 4" x 4" boxes. Socket outlets for multiple plug types. Devices for 127 V and 230 V rated voltage. 50 and 60 Hz frequency.

Functional for any space

Specially designed for easy installation, damage prevention and long life

—

Optional wiring method

- 16AX switches with screw terminals.
- 10AX switches with rapid cabling terminals.
- Screw/nut cabling: the exclusive design of the contact, nut and housing holds the cable securely throughout the unit's service life.
- Rapid cabling: contacts with automatic terminals assure easy cabling and up to 40% faster installation. This system allows the installer to use both hand to cable or disconnect switches, since no tools are needed (e.g. screwdrivers).

—

More protection

- Children are famously curious and love to experiment with household appliances - especially dangerous when they are located for easy access like power outlets.
- All Origen outlets are equipped with child protective shutters compliant with IEC 60884-1 to protect against electric shock when an object is inserted (e.g. a fork).

—

Switch mechanism

- Our switches assure reduced sparking, lower temperatures and a longer life when used with LED loads.
- Tested pursuant to IEC 60669-1:2017 (up to 200W LED loads for 16AX switches).

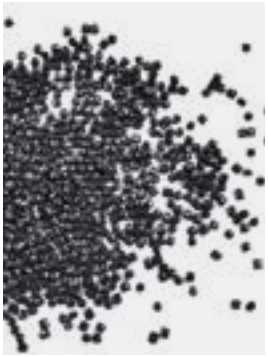

—

High quality, durable materials

- Manufactured with high quality recyclable materials.
- Completely ABS free. Made with robust, fire-resistant polycarbonate to guarantee excellent installation and safety in use.

—

Front and rear extraction system
The mechanisms can easily be extracted from the front and rear for easier installation even after the frame has been mounted to the enclosure.

—

Three point snap mounting system
Origen includes an exclusive snap mounting system to prevent the modules moving around, coming loose or being pushed into the wall.

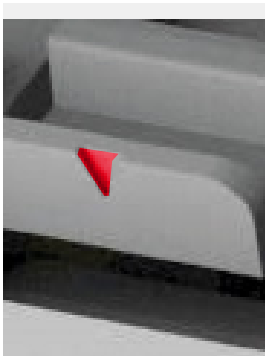

—

Marked for faster installation
The clearly marked frame and modules make installation a snap.

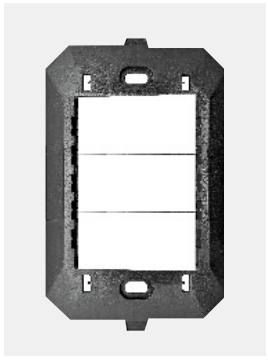
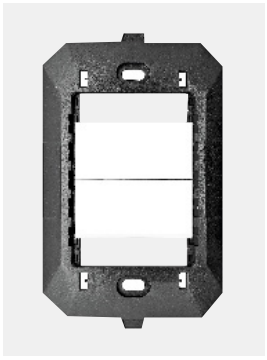

—

Half module snap mounting system
The half-module snap point assures universal mounting, as well as improving product inventory management

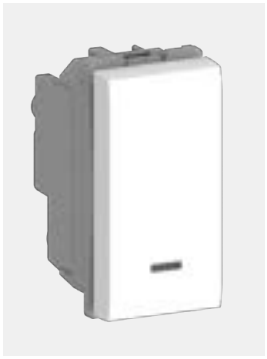

—

LED backlighting
Our optional highly efficient, energy-saving LED backlighting is bright, easy to install and lasts up to 80% longer.

—

Innovative functions
- USB A+C chargers up to 20 W including Power Delivery and Quick Charge protocols.
- Universal and 1-10 V dimmers to control any kind of light load type.

For any type of installation
Compatible with any market

Our simple, foolproof installation system assures unbeatable performance, comfort and function in any market

—
Switch composition

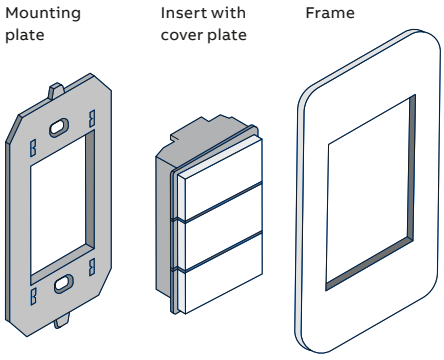

—
Switch composition

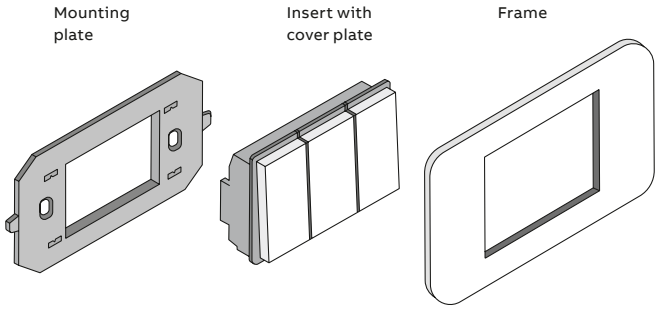

—
NEMA socket outlet composition

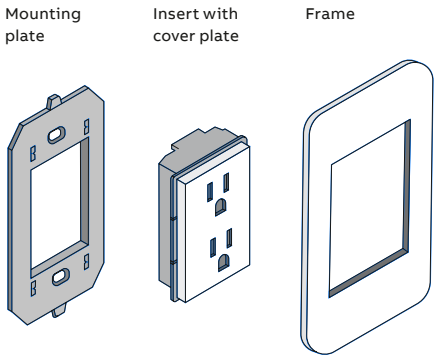

—
Socket outlet composition

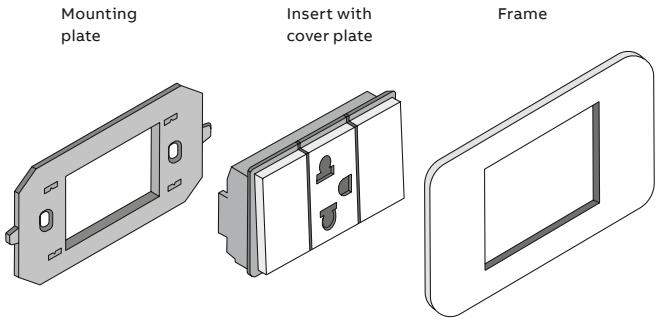

Elegant colours

The perfect match for any living space

Origen offers a wide number of combinations to match with the decoration in any residential or commercial space.

—

Frame finishes
Available in 6 colors

White
BL

Silver
PL

Graphite
GF

Black
NG

Champagne
CH

Golden
OR

—

Module finishes
Available in 2 colors

White
BL

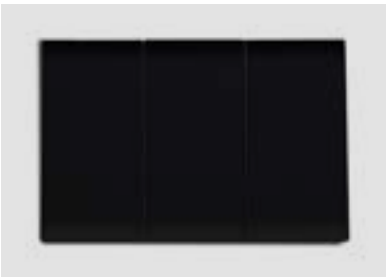

Black
NG

—

Configuration options
Suitable for vertical and horizontal installation



3M



4M

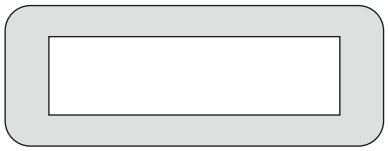

7M



4" x 2"



4" x 4"

BL - BL

BL - PL

BL - GF

NG - BL

NG - PL

NG - GF

BL - NG

BL - CH

BL - OR

NG - NG

NG - CH

NG - OR

Origen

1-way switches

Article-No	Color	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, SP - 1 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals		
N0101 BL	White	2CLA010100N1102	20/200
N0101 NG	Black	2CLA010100N1502	20/200
	Switch 1-gang, 1-way, SP - 2 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals		
N0201 BL	White	2CLA020100N1102	14/140
N0201 NG	Black	2CLA020100N1502	14/140
	Switch 1-gang, 1-way, SP - 3 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals		
N0301 BL	White	2CLA030100N1102	12/120
N0301 NG	Black	2CLA030100N1502	12/120
	Switch 1-gang, 1-way, SP - 1 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/60 W Rapid cabling - screwless terminals		
N0101.Q BL	White	2CLA010101N1102	20/200
N0101.Q NG	Black	2CLA010101N1502	20/200
	Switch 1-gang, 1-way, SP - 2 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/60 W Rapid cabling - screwless terminals.		
N0201.Q BL	White	2CLA020101N1102	14/140
N0201.Q NG	Black	2CLA020101N1502	14/140
	Switch 1-gang, 1-way, SP - 3 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/60 W Rapid cabling - screwless terminals		
N0301.Q BL	White	2CLA030101N1102	12/120
N0301.Q NG	Black	2CLA030101N1502	12/120

1-way illuminated switches

Article-No	Color	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, SP - 1 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals Included: locator LED lamp N0191		
N0101.3 BL	White	2CLA010130N1102	20/200
N0101.3 NG	Black	2CLA010130N1502	20/200
	Switch 1-gang, 1-way, SP - 2 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals Included: locator LED lamp N0191		
N0201.3 BL	White	2CLA020130N1102	14/140
N0201.3 NG	Black	2CLA020130N1502	14/140
	Switch 1-gang, 1-way, SP - 3 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals Included: locator LED lamp N0191		
N0301.3 BL	White	2CLA030130N1102	12/120
N0301.3 NG	Black	2CLA030130N1502	12/120
	Switch 1-gang, 1-way, SP - 1 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/60 W Rapid cabling - screwless terminals Included: locator LED lamp N0191		
N0101.3Q BL	White	2CLA010131N1102	20/200
N0101.3Q NG	Black	2CLA010131N1502	20/200
	Switch 1-gang, 1-way, SP - 2 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/60 W Rapid cabling - screwless terminals Included: locator LED lamp N0191		
N0201.3Q BL	White	2CLA020131N1102	14/140
N0201.3Q NG	Black	2CLA020131N1502	14/140
	Switch 1-gang, 1-way, SP - 3 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/60 W Rapid cabling - screwless terminals Included: locator LED lamp N0191		
N0301.3Q BL	White	2CLA030131N1102	12/120
N0301.3Q NG	Black	2CLA030131N1502	12/120

Origen

2-way switches

Article-No	Color	Order-No.	Pack/Qty
	Switch 1-gang, 2-way, SP - 1 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals		
N0102 BL	White	2CLA010200N1102	20/200
N0102 NG	Black	2CLA010200N1502	20/200
	Switch 1-gang, 2-way, SP - 2 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals		
N0202 BL	White	2CLA020200N1102	14/140
N0202 NG	Black	2CLA020200N1502	14/140
	Switch 1-gang, 2-way, SP - 3 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals		
N0302 BL	White	2CLA030200N1102	12/120
N0302 NG	Black	2CLA030200N1502	12/120
	Switch 1-gang, 2-way, SP - 1 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/60 W Rapid cabling - screwless terminals		
N0102.Q BL	White	2CLA010201N1102	20/200
N0102.Q NG	Black	2CLA010201N1502	20/200
	Switch 1-gang, 2-way, SP - 2 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/600 W Rapid cabling - screwless terminals		
N0202.Q BL	White	2CLA020201N1102	14/140
N0202.Q NG	Black	2CLA020201N1502	14/140
	Switch 1-gang, 2-way, SP - 3 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/60 W Rapid cabling - screwless terminals		
N0302.Q BL	White	2CLA030201N1102	12/120
N0302.Q NG	Black	2CLA030201N1502	12/120

2-way illuminated switches

Article-No	Color	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, SP - 1 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals Included: locator LED lamp N0191		
N0102.3 BL	White	2CLA010230N1102	20/200
N0102.3 NG	Black	2CLA010230N1502	20/200
	Switch 1-gang, 2-way, SP - 2 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals Included: locator LED lamp N0191		
N0202.3 BL	White	2CLA020230N1102	14/140
N0202.3 NG	Black	2CLA020230N1502	14/140
	Switch 1-gang, 2-way, SP - 3 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals Included: locator LED lamp N0191		
N0302.3 BL	White	2CLA030230N1102	12/120
N0302.3 NG	Black	2CLA030230N1502	12/120
	Switch 1-gang, 2-way, SP - 1 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/60 W Rapid cabling - screwless terminals Included: locator LED lamp N0191		
N0102.3Q BL	White	2CLA010231N1102	20/200
N0102.3Q NG	Black	2CLA010231N1502	20/200
	Switch 1-gang, 2-way, SP - 2 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/60 W Rapid cabling - screwless terminals Included: locator LED lamp N0191		
N0202.3Q BL	White	2CLA020231N1102	14/140
N0202.3Q NG	Black	2CLA020231N1502	14/140
	Switch 1-gang, 2-way, SP - 3 M Rated voltage: 110 - 250 Vac Rated current: 10 AX Rated power iLED (230/127 Vac): 100/60 W Rapid cabling - screwless terminals Included: locator LED lamp N0191		
N0302.3Q BL	White	2CLA030231N1102	12/120
N0302.3Q NG	Black	2CLA030231N1502	12/120

Origen

Intermediate switches

Article-No	Color	Order-No.	Pack/Qty
		Switch 1-gang, intermediate, SP - 1 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals	
N0110 BL	White	2CLA011000N1102	16/160
N0110 NG	Black	2CLA011000N1502	16/160

Double pole switches

		Switch 1-gang, 1-way, DP - 1 M Rated voltage: 110 - 250 Vac Rated current: 16 AX Rated power iLED (230/127 Vac): 200/100 W Screw-nut terminals	
N0101.2 BL	White	2CLA010120N1102	16/160
N0101.2 NG	Black	2CLA010120N1502	16/160
		Switch 1-gang, 1-way, DP - 1 M Rated voltage: 110 - 250 Vac Rated current: 20 AX Rated power iLED (230/127 Vac): 250/150 W Screw-nut terminals Included: locator LED lamp N0191	
N0101.7 BL	White	2CLA010170N1102	16/160
N0101.7 NG	Black	2CLA010170N1502	16/160
		Switch 1-gang, 1-way, DP - 3 M Rated voltage: 110 - 250 Vac Rated current: 45AX Screw-nut terminals Included: locator LED lamp N0191	
N0301.8 BL	White	2CLA030180N1102	16/160
N0301.8 NG	Black	2CLA030180N1502	16/160

Blind controls

		Switch 1-0-2 blind control 1-gang - 1 M Rated voltage: 110 - 250 Vac Rated current: 10 A Screw-nut terminals	
N0144.1 BL	White	2CLA014410N1102	16/160
N0144.1 NG	Black	2CLA014410N1502	16/160

Push buttons

Article-No	Color	Order-No.	Pack/Qty
		Push-button, SP with bell symbol - 1M Rated voltage: 110 - 250 Vac Rated current: 6A Screw-nut terminals 1-gang 1-way - Normally Opened (NO)contact	
N0104 BL	White	2CLA010400N1102	20/200
N0104 NG	Black	2CLA010400N1502	20/200
		Push-button, SP with bell symbol - 2M Rated voltage: 110 - 250 Vac Rated current: 6A Screw-nut terminals 1-way - Normally Opened (NO) contact	
N0204 BL	White	2CLA020400N1102	14/140
N0204 NG	Black	2CLA020400N1502	14/140
		Push-button, SP with bell symbol - 3M Rated voltage: 110 - 250 Vac Rated current: 6A Screw-nut terminals 1-way - Normally Opened (NO) contact	
N0304 BL	White	2CLA030400N1102	12/120
N0304 NG	Black	2CLA030400N1502	12/120
		Push-button, SP with bell symbol - 1M Rated voltage: 110 - 250 Vac Rated current: 6A Rapid cabling - screwless terminals 1-way - Normally Opened (NO) contact	
N0104.Q BL	White	2CLA010401N1102	20/200
N0104.Q NG	Black	2CLA010401N1502	20/200
		Push-button, SP with bell symbol - 2M Rated voltage: 110 - 250 Vac Rated current: 6A Rapid cabling - screwless terminals 1-way - Normally Opened (NO) contact	
N0204.Q BL	White	2CLA020401N1102	14/140
N0204.Q NG	Black	2CLA020401N1502	14/140
		Push-button, SP with bell symbol - 3M Rated voltage: 110 - 250 Vac Rated current: 6A Rapid cabling - screwless terminals 1-way - Normally Opened (NO)contact	
N0304.Q BL	White	2CLA030401N1102	12/120
N0304.Q NG	Black	2CLA030401N1502	12/120

Origen

Push buttons illuminated

Article-No	Color	Order-No.	Pack/Qty
		Push-button, SP with bell symbol - 1M Rated voltage: 110 - 250 Vac Rated current: 6A Screw-nut terminals 1-gang, 1-way - Normally Opened (NO) contact Included: locator LED lamp N0191	
N0104.3 BL	White	2CLA010430N1102	20/200
N0104.3 NG	Black	2CLA010430N1502	20/200
		Push-button, SP with bell symbol - 2M Rated voltage: 110 - 250 Vac Rated current: 6A Screw-nut terminals 1-way - Normally Opened (NO) contact Included: locator LED lamp N0191	
N0204.3 BL	White	2CLA020430N1102	14/140
N0204.3 NG	Black	2CLA020430N1502	14/140
		Push-button, SP with bell symbol - 3M Rated voltage: 110 - 250 Vac Rated current: 6A Screw-nut terminals 1-way - Normally Opened (NO) contact Included: locator LED lamp N0191	
N0304.3 BL	White	2CLA030430N1102	12/120
N0304.3 NG	Black	2CLA030430N1502	12/120
		Push-button, SP with bell symbol - 1M Rated voltage: 110 - 250 Vac Rated current: 6A Rapid cabling - screwless terminals 1-way - Normally Opened (NO) contact Included: locator LED lamp N0191	
N0104.3Q BL	White	2CLA010431N1102	20/200
N0104.3Q NG	Black	2CLA010431N1502	20/200
		Push-button, SP with bell symbol - 2M Rated voltage: 110 - 250 Vac Rated current: 6A Rapid cabling - screwless terminals 1-way - Normally Opened (NO) contact Included: locator LED lamp N0191	
N0204.3Q BL	White	2CLA020431N1102	14/140
N0204.3Q NG	Black	2CLA020431N1502	14/140
		Push-button, SP with bell symbol - 3M Rated voltage: 110 - 250 Vac Rated current: 6A Rapid cabling - screwless terminals 1-way - Normally Opened (NO) contact Included: locator LED lamp N0191	
N0304.3Q BL	White	2CLA230431N1102	12/120
N0304.3Q NG	Black	2CLA230431N1502	12/120

Special pushbuttons

Article-No	Color	Order-No.	Pack/Qty
		Push-button, SP with no symbol - 1M Rated voltage: 110 - 250 Vac Rated current: 10 A Screw-nut terminals 1-gang, 1-way - Normally Opened (NO) contact	
N0104.2 BL	White	2CLA010420N1102	20/200
N0104.2 NG	Black	2CLA010420N1502	20/200
		Push-button, SP with light symbol - 1M Rated voltage: 110 - 250 Vac Rated current: 10 A Screw-nut terminals 1-way - Normally Opened (NO) contact	
N0104.7 BL	White	2CLA010470N1102	20/200
N0104.7 NG	Black	2CLA010470N1502	20/200

Spare LED lamps

Article-No	Color	Order-No.	Pack/Qty
		Locator LED lamp kit **Switches and push-buttons** LED lamp Rated voltage: 110 - 240 Vac / 50 - 60 Hz Cable connection to the switch / push-button terminals	
N0191	Blue	2CLA019100N1002	100/1000

Origen
Socket outlets

Article-No	Color	Order-No.	Pack/Qty
		American earthed socket outlet - 1M Rated voltage: 125 Vac Rated current: 15A Type B: 2P + E / NEMA 5-15R Shuttered for child safety Screw-nut terminals.	
N0128 BL	White	2CLA012800N1102	20/200
N0128 NG	Black	2CLA012800N1502	20/200
N0128 NA	Orange	2CLA012800N2502	20/200
		American earthed duplex socket outlet - 3M Rated voltage: 125 Vac Rated current: 15A Type B: 2P + E / NEMA 5-15R Duplex outlet Shuttered for child safety Screw-nut terminals	
N0328 BL	White	2CLA032800N1102	5/50
N0328 NG	Black	2CLA032800N1502	5/50
N0328 NA	Orange	2CLA032800N2502	5/50
		Euro-American unearthed socket outlet - 1M Rated voltage: 125 / 250 Vac Rated current: 15 / 16A Type A+C: 2P / NEMA 1-15R (non-earthed) Shuttered for child safety Screw-nut terminals	
N0135 BL	White	2CLA013500N1102	20/200
N0135 NG	Black	2CLA013500N1502	20/200
		Euro-American earthed socket outlet - 1M Rated voltage: 125 / 250 Vac Rated current: 15 / 16 A Type B+C: 2P / NEMA 5-15R Shuttered for child safety Screw-nut terminals	
N0138 BL	White	2CLA013800N1102	20/200
N0138 NG	Black	2CLA013800N1502	20/200
		Euro-American duplex socket outlet - 3M Rated voltage: 125 / 250 Vac Rated current: 15 / 16A Type B+C: 2P / NEMA 5-15R Duplex outlet Shuttered for child safety. Rapid cabling - screwless terminals	
N0338.Q BL	White	2CLA033801N1102	7/70
N0338.Q NG	Black	2CLA033801N1502	7/70
		Euro-American duplex socket outlet - 3M Rated voltage: 125 / 250 Vac Rated current: 15 / 16A Type B+C: 2P / NEMA 5-15R Duplex outlet Shuttered for child safety. Screw-nut terminals	
N0338 BL	White	2CLA033800N1102	6/60
N0338 NG	Black	2CLA033800N1502	6/60
N0338 RJ	Red	2CLA033800N7002	6/60
N0338 NA	Orange	2CLA033800N2502	6/60

Article-No	Color	Order-No.	Pack/Qty
		Italian 10A socket outlet - 1M Rated voltage: 250 Vac Rated current: 10A Type L: 2P + E / P11 Shuttered for child safety Screw-nut terminals	
N0133.1 BL	White	2CLA013310N1102	16/160
N0133.1 NG	Black	2CLA013310N1502	16/160
N0133.1 RJ	Red	2CLA013310N7002	16/160
N0133.1 NA	Orange	2CLA013310N2502	16/160
		Italian 10/16A socket outlet - 1M Rated voltage: 250 Vac Rated current: 10 / 16A Type L: 2P + E / P17/11 Shuttered for child safety Screw-nut terminals	
N0133 BL	White	2CLA013300N1102	16/160
N0133 NG	Black	2CLA013300N1502	16/160
N0133 RJ	Red	2CLA013300N7002	16/160
N0133 NA	Orange	2CLA013300N2502	16/160
		Italian / German socket outlet - 2M Rated voltage: 250 Vac Rated current: 10 / 16A Type F+L: 2P + E / P30/17 Shuttered for child safety Screw-nut terminals	
N0233 BL	White	2CLA023300N1102	8/80
N0233 NG	Black	2CLA023300N1502	8/80
N0233 RJ	Red	2CLA023300N7002	8/80
N0233 NA	Orange	2CLA023300N2502	8/80
		Universal socket outlet - 2M Rated voltage: 250 Vac Rated current: 16A Multilple types: 2P + E Shuttered for child safety Screw-nut terminals	
N0239 BL	White	2CLA023900N1102	10/100
N0239 NG	Black	2CLA023900N1502	10/100
		Schuko socket outlet - 2M Rated voltage: 250 Vac Rated current: 16A Multilple types: 2P + E Shuttered for child safety Screw-nut terminals	
N0288 BL	White	2CLA028800N1102	8/80
N0288 NG	Black	2CLA028800N1502	8/80
N0288 RJ	Red	2CLA028800N7002	8/80
N0288 NA	Orange	2CLA028800N2502	8/80

Origen

Socket outlets

Article-No	Color	Order-No.	Pack/Qty
		AR/AU socket outlet 10 A - 1M Rated voltage: 125 / 250 Vac Rated current: 10 A Type: 2P + E Shuttered for child safety Screw-nut terminals	
N0132 BL	White	2CLA013200N1102	16/160
N0132 NG	Black	2CLA013200N1502	16/160
		AR/AU socket outlet 20 A - 2M Rated voltage: 125 / 250 Vac Rated current: 20 A Type: 2P + E Shuttered for child safety Screw-nut terminals	
N0232.2 BL	White	2CLA023220N1102	8/80
N0232.2 NG	Black	2CLA023220N1502	8/80
		**AR/AU duplex socket outlet 20 A - 3M** Rated voltage: 125 / 250 Vac Rated current: 10 A Type: 2P + E Duplex outlet Shuttered for child safety Screw-nut terminals	
N0332 BL	White	2CLA033200N1102	6/60
N0332 NG	Black	2CLA033200N1502	6/60
		BR socket outlet 10 A - 1M Rated voltage: 125 / 250 Vac Rated current: 10 A Type: 2P + E Shuttered for child safety Screw-nut terminals	
N0136 BL	White	2CLA013600N1102	16/160
N0136 NG	Black	2CLA013600N1502	16/160
N0136 RJ	Red	2CLA013600N7002	16/160
		BR socket outlet 20 A - 1M Rated voltage: 125 / 250 Vac Rated current: 20 A Type: 2P + E Shuttered for child safety Screw-nut terminals	
N0136.2 BL	White	2CLA013620N1102	16/160
N0136.2 NG	Black	2CLA013620N1502	16/160
N0136.2 RJ	Red	2CLA013620N7002	16/160

Article-No	Color	Order-No.	Pack/Qty
		GFCI socket outlet 20 A - 3M Rated voltage: 125 Vac Rated current: 20 A Type: 2P + E Shuttered for child safety Screw-nut terminals	
N0329 BL	White	2CLA032900N1102	4/40
N0329 NG	Black	2CLA032900N1502	4/40
		EC socket outlet 15 A - 2M Rated voltage: 250 Vac Rated current: 15 A Type: 2P + E Shuttered for child safety Screw-nut terminals	
N0227 BL	White	2CLA022700N1102	8/80
N0227 NG	Black	2CLA022700N1502	8/80

USB chargers

Article-No	Color	Order-No.	Pack/Qty
		USB-A charger, 12 W, 1-gang - 1M Input voltage: 110 - 230 Vac. Frequency: 50/60 Hz. Output voltage: 5 Vdc. Output current: 2,4 A (max. 12 W). Outputs: 1x USB-A.	
N0185 BL	White	2CLA018500N1102	16/160
N0185 NG	Black	2CLA018500N1502	16/160
		USB-A+C charger PD / QC, 20 W, 2-gang - 1M Input voltage: 110 - 230 Vac. Frequency: 50/60 Hz. Outputs: 1x USB-A + 1x USB-C: - USB-C (max. 20 W): 5 Vdc (3 A); 9 Vdc (2,2 A); 12 Vdc (1,67 A). - USB-A (max. 18 W): 5 Vdc (3 A); 9 Vdc (2 A); 12 Vdc (1,5 A). - USB-A+C (max. 15 W): 5 Vdc (3 A). Charging protocols: - USB-A: QC 3.0, QC 2.0, Apple MFi 2,4A, Samsung AFC, Huawei FCP. - USB-C: PD 3.0, QC 3.0, QC 2.0, Apple MFi 2,4A, Samsung AFC, Huawei FCP.	
N0185.3 BL	White	2CLA018530N1102	16/160
N0185.3 NG	Black	2CLA018530N1502	16/160

Origen

TV socket outlets

Article-No	Color	Order-No.	Pack/Qty
		TV terminal outlet F-type - 1M Single TV outlet F type - female	
N0150 BL	White	2CLA015000N1102	20/200
N0150 NG	Black	2CLA015000N1502	20/200
		TV terminal outlet M-type - 1M Single TV outlet - Dead-end M type - 9,52 mm - male	
N0150.7 BL	White	2CLA015070N1102	20/200
N0150.7 NG	Black	2CLA015070N1502	20/200

HDMI outlets

		HDMI female-female connection unit with cable - 1M Front: 1x HDMI connector Rear: 1x HDMI connector with 20 cm cable extension.	
N0155.7 BL	White	2CLA015570N1102	20/200
N0155.7 NG	Black	2CLA015570N1502	20/200

Temperature controls - Fan regulators

		Rotatory fan regulator 127 V triac - 1M Rated voltage: 127 Vac. Frequency: 50/60 Hz. Power (max load): 250 W. 2 wire connection.	
N0154.1 BL	White	2CLA015410N1102	16/160
N0154.1 PL	Black	2CLA015410N1502	16/160
		Rotatory fan regulator 230 V triac - 1M Rated voltage: 230 Vac. Frequency: 50/60 Hz. Power (max load): 500 W. 2 wire connection.	
N0154 BL	White	2CLA015400N1102	16/160
N0154 NG	Black	2CLA015400N1502	16/160

Telephone outlets

Article-No	Color	Order-No.	Pack/Qty
		Telephone outlet RJ11 - 1M RJ11 type connector Cat 3	
N0117 BL	White	2CLA011700N1102	20/200
N0117 NG	Black	2CLA011700N1502	20/200

Data outlets outlets

		Data outlet RJ45, Cat.5e UTP - 1M RJ45 type connector Cat. 5e UTP	
N0118.5 BL	White	2CLA011850N1102	20/200
N0118.5 NG	Black	2CLA011850N1502	20/200
		Data outlet RJ45, Cat.5e STP - 1M RJ45 type connector Cat. 5e STP	
N0118.52 BL	White	2CLA011852N1102	20/200
N0118.52 NG	Black	2CLA011852N1502	20/200
		Data outlet RJ45, Cat.6 UTP - 1M RJ45 type connector Cat. 6 UTP	
N0118.6 BL	White	2CLA011860N1102	20/200
N0118.6 NG	Black	2CLA011860N1502	20/200
		Data outlet RJ45, Cat.6 STP - 1M RJ45 type connector Cat. 6 STP	
N0118.62 BL	White	2CLA011862N1102	20/200
N0118.62 NG	Black	2CLA011862N1502	20/200

Origen

Light controls - Rotatory dimmers

Article-No	Color	Order-No.	Pack/Qty
		Rotatory dimmer 230 V triac - 1M Rated voltage: 230 Vac. Frequency: 50/60 Hz. Power (min. / max. load): - Incandescent / halogen lamps: 5 - 550 W. - Dimmable LED lamps: 5 - 100 W. 2 wire connection.	
N0160 BL	White	2CLA016000N1102	16/160
N0160 NG	Black	2CLA016000N1502	16/160
		Rotatory dimmer 127 V triac - 1M Rated voltage: 127 Vac. Frequency: 50/60 Hz. Power (min. / max. load): - Incandescent / halogen lamps: 5 - 250 W. - Dimmable LED lamps: 5 - 100 W. 2 wire connection.	
N0160.1 BL	White	2CLA016010N1102	16/160
N0160.1 NG	Black	2CLA016010N1502	16/160
		Universal rotatory dimmer 230 V - 1M Rated voltage: 230 Vac. Frequency: 50/60 Hz. Power (min. / max. load): - Incandescent / halogen lamps: 5 - 250 W. - Dimmable LED lamps: 3 - 100 W. - Dimmable fluorescent lamp: 3 - 100 W. 2 wire connection.	
N0160.3 BL	White	2CLA016030N1102	16/160
N0160.3 NG	Black	2CLA016030N1502	16/160
		Universal rotatory dimmer 127 V - 1M Rated voltage: 127 Vac. Frequency: 50/60 Hz. Power (min. / max. load): - Incandescent / halogen lamps: 5 - 150 W. - Dimmable LED lamps: 3 - 80 W. - Dimmable fluorescent lamp: 3 - 80 W. 2 wire connection.	
N0160.7 BL	White	2CLA016070N1102	16/160
N0160.7 NG	Black	2CLA016070N1502	16/160
		1-10V rotatory dimmer - 1M Rated voltage: 127/230 Vac. Frequency: 50/60 Hz. Rated current: - 230 Vac: 10 A. - 127 Vac: 5 A. Dimmable electronic ballast/driver. 1-10V control input.	
N0160.9 BL	White	2CLA016090N1102	16/160
N0160.9 NG	Black	2CLA016090N1502	16/160

Buzzers

Article-No	Color	Order-No.	Pack/Qty
		Buzzer 230 V - 1M Rated voltage: 230 Vac. Frequency: 50/60 Hz. Rated current: 0,058 A.	
N0119 BL	White	2CLA011900N1102	16/160
N0119 NG	Black	2CLA011900N1502	16/160
		Buzzer 127 V - 1M Rated voltage: 127 Vac. Frequency: 50/60 Hz. Rated current: 0,096 A.	
N0119.1 BL	White	2CLA011910N1102	16/160
N0119.1 NG	Black	2CLA011910N1502	16/160

Blank covers

		Blank cover plate - 1M Blank cover plate for spare spaces. Size: 1 module.	
N0100 BL	White	2CLA010000N1102	30/300
N0100 NG	Black	2CLA010000N1502	30/300

Cable outlet

		Cable outlet cover plate -1M Cable outlet cover plate for spare spaces. Size: 1 module.	
N0107 BL	White	2CLA010700N1102	30/300
N0107 NG	Black	2CLA010700N1502	30/300

—

Frames

Frames for 3M (4”x2”), 4M, 7M and 3+3M (4x4")

1 to 3 module cover frames for 3 module or 4“x2“ box for vertical installation habits (American and Eastern Asian)

01 Frame cable outlet for 3 module box
02 Frame 1 module for 3 modules box
03 Frame 1 + 1 modules for 3 modules box
04 Frame 2 modules for 3 modules box
05 Frame 3 modules in 3 modules box
06 Frame NEMA WD6 for 3 modules box

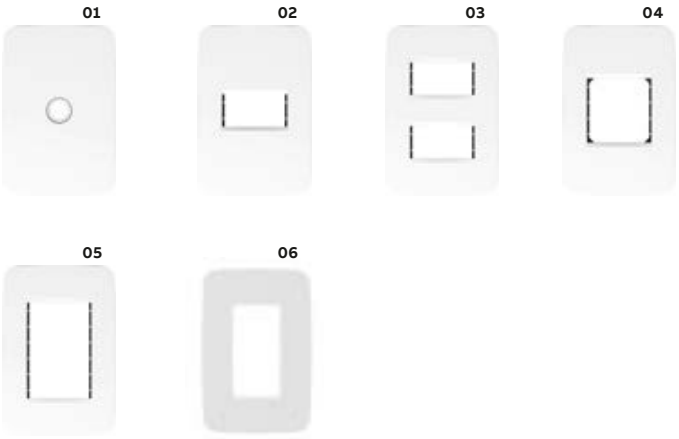

3+3 module cover frames for 4”x4” box installation habit (American and Eastern Asian)

07 Blank frame for 4“ x 4“ box
08 Frame 1+ 1 modules for 4“ x 4“ box
09 Frame 1 + 1 + 1 + 1 modules for 4“ x 4“ box
10 Frame 3 + 3 modules for 4“ x 4“ box

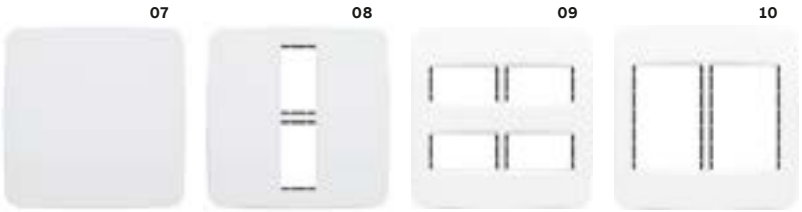

1 to 7 module cover frames for 3, 4 and 7 module box for horizontal installation habit (Italian)

11 Frame cable outlet for 3 module box
12 Frame 1 module for 3 modules box
13 Frame 1 + 1 modules for 3 modules box
14 Frame 2 modules for 3 modules box
15 Frame 3 modules in 3 modules box
16 Frame 4 modules in 4 modules box
17 Frame 7 modules in 7 modules box

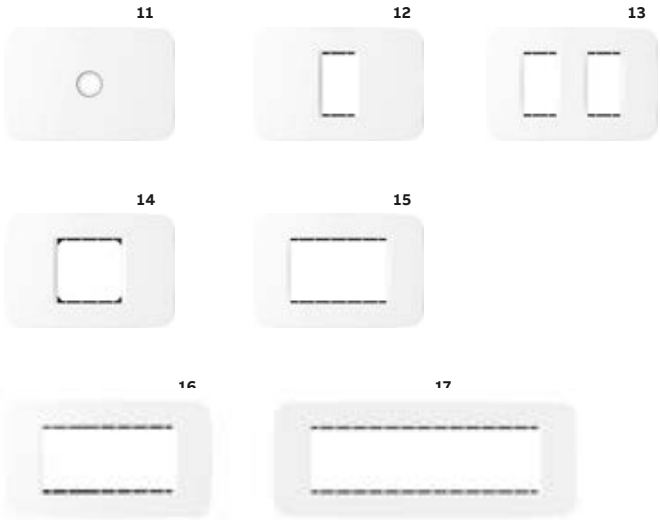

3 module cover frames for 3 module or 4“x2“ box for horizontal outdoor installation (IP55 protection degree)

18 Frame IP55 3 modules in 3 modules box
19 Box IP55 3 modules in 3 modules box

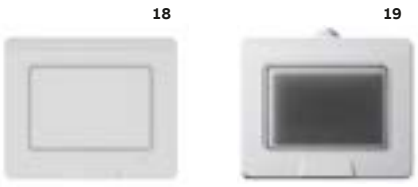

Frames
VDE frames

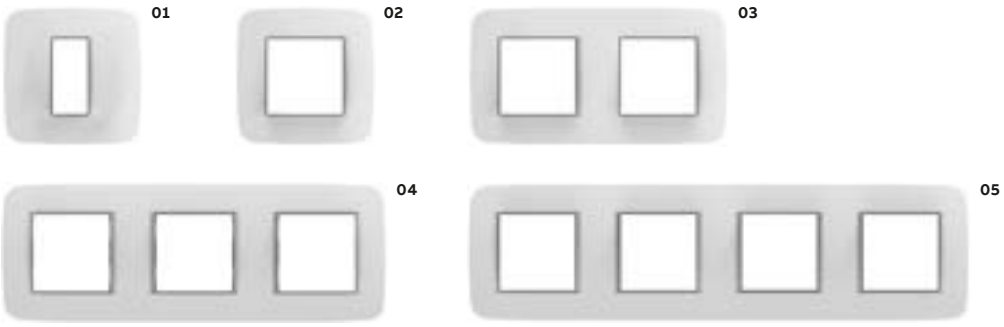

1 to 4 gang for VDE frames

01	1 gang 1 module VDE frame
02	1 gang 2 modules VDE frame
03	2 gangs 2 modules VDE frame
04	3 gangs 2 modules VDE frame
05	4 gangs 2 modules VDE frame

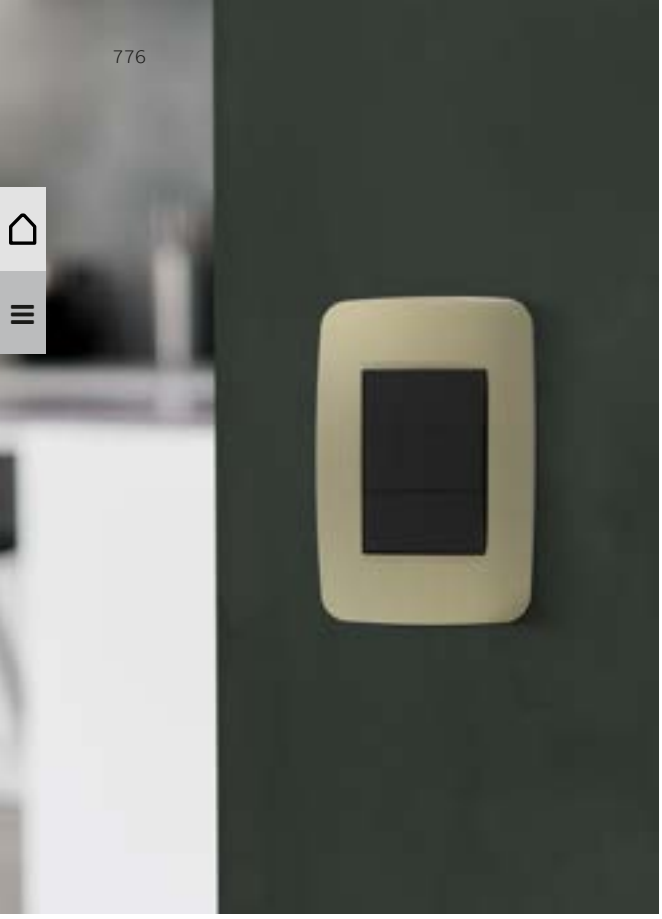

—
01

—
02

—
01. Matching nowadays decoration trends
—
02. Illuminated switches and push-buttons
—
03. Innovations that offer greater comfort and safety

—
03

Origen
Frames

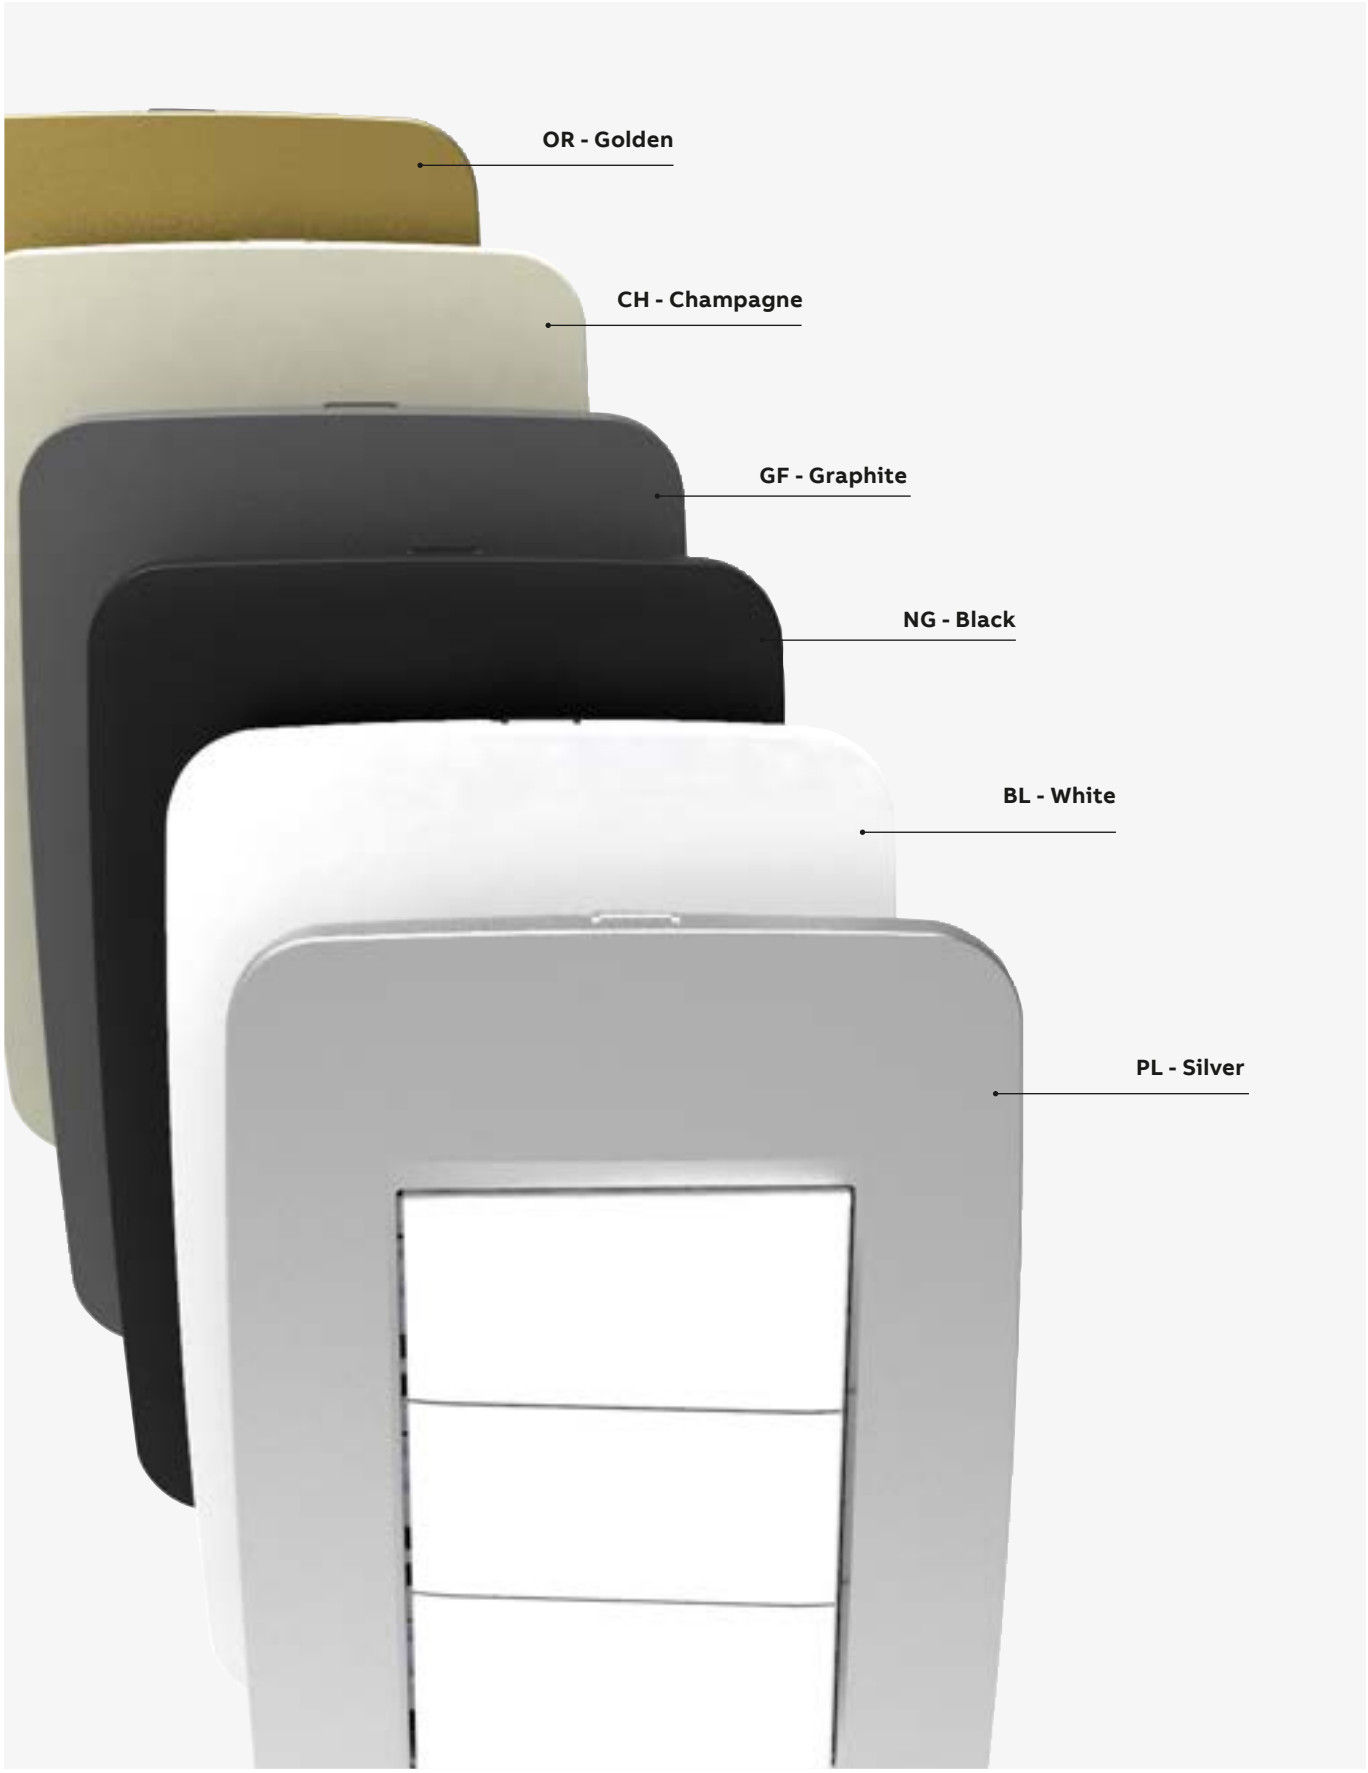

Origen

Frames for rectangular 3M (4”x2”) and 3+3M (4"x4") boxes

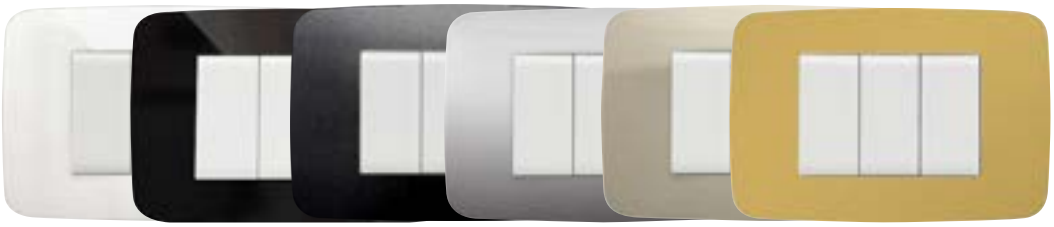

Frames - 3, 4 and 7 modules
Material: polycarbonate
Size (width x height):
- 3M: 120 x 80 mm.
- 4M: 142 X 80 mm.
- 7M: 208 x 80 mm.
- 3+3M: 120 x 133 mm.

Mounting plate and screws included.

White - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0370.1 BL	Cable outlet	2CLA037010N1102	20/200
N0371.1 BL	1	2CLA037110N1102	20/200
N0372.1 BL	2	2CLA037210N1102	20/200
N0371.21 BL	1+1	2CLA037121N1102	20/200
N0373.1 BL	3	2CLA037310N1102	20/200
N0474.1 BL	4	2CLA047410N1102	16/160
N0777.1 BL	7	2CLA077710N1102	10/100
N0671.41 BL	1+1+1+1	2CLA067141N1102	10/100
N0673.1 BL	3+3	2CLA067310N1102	10/100

Black - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0370.1 NG	Cable outlet	2CLA037010N1502	20/200
N0371.1 NG	1	2CLA037110N1502	20/200
N0372.1 NG	2	2CLA037210N1502	20/200
N0371.21 NG	1+1	2CLA037121N1502	20/200
N0373.1 NG	3	2CLA037310N1502	20/200
N0474.1 NG	4	2CLA047410N1502	16/160
N0777.1 NG	7	2CLA077710N1502	10/100
N0671.41 NG	1+1+1+1	2CLA067141N1502	10/100
N0673.1 NG	3+3	2CLA067310N1502	10/100

Dune - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0370.1 DN	Cable outlet	2CLA037010N6202	20/200
N0371.1 DN	1	2CLA037110N6202	20/200
N0372.1 DN	2	2CLA037210N6202	20/200
N0371.21 DN	1+1	2CLA037121N6202	20/200
N0373.1 DN	3	2CLA037310N6202	20/200
N0474.1 DN	4	2CLA047410N6202	16/160
N0777.1 DN	7	2CLA077710N6202	10/100

Red - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.1 RJ	3	2CLA037310N7002	20/200
N0474.1 RJ	4	2CLA047410N7002	16/160

Orange - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.1 NA	3	2CLA037310N2502	20/200
N0474.1 NA	4	2CLA047410N2502	16/160

Silver - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.1 PL	3	2CLA037310N1302	20/200
N0474.1 PL	4	2CLA047410N1302	16/160
N0777.1 PL	7	2CLA077710N1302	10/100
N0673.1 PL	3+3	2CLA067310N1302	10/100

Champagne - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.1 CH	3	2CLA037310N1902	20/200
N0474.1 CH	4	2CLA047410N1902	16/160
N0777.1 CH	7	2CLA077710N1902	10/100
N0673.1 CH	3+3	2CLA067310N1902	10/100

Graphite - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.1 GF	3	2CLA037310N1802	20/200
N0474.1 GF	4	2CLA047410N1802	16/160
N0777.1 GF	7	2CLA077710N1802	10/100
N0673.1 GF	3+3	2CLA067310N1802	10/100

Golden - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.1 OR	3	2CLA037310N1702	20/200
N0474.1 OR	4	2CLA047410N1702	16/160
N0777.1 OR	7	2CLA077710N1702	10/100
N0673.1 OR	3+3	2CLA067310N1702	10/100

Origen

Metallic frames for rectangular 3M (4”x2”) and 3+3M (4"x4") boxes

Aluminum frames - 3 and 4 modules
Material: Aluminum
Size (width x height):
- 3M: 120 x 80 mm.
- 4M: 142 X 80 mm.
Mounting plate and screws included.



NEMA frames - 3 modules
Material: polycarbonate
Size (width x height):
- 3M: 120 x 80 mm.
Mounting plate and screws included.

Steel - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.1 OX	3	2CLA037310N4002	10/100
N0474.1 OX	4	2CLA047410N4002	8/80

Aluminum - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.1 AL	3	2CLA037310N4102	10/100
N0474.1 AL	4	2CLA047410N4102	8/80

Champagne - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.1 CM	3	2CLA037310N4202	10/100
N0474.1 CM	4	2CLA047410N4202	8/80

White- - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.61 BL	3	2CLA037361N1102	20/200

Black - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.61 NG	3	2CLA037361N1502	20/200

Silver - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.61 PL	3	2CLA037361N1302	20/200

Champagne - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.61 CH	3	2CLA037361N1902	20/200

Graphite - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.61 GF	3	2CLA037361N1802	20/200

Golden - ABB logo

Article-No.	Modularity	Order-No.	Pack/Qty
N0373.61 OR	3	2CLA037361N1702	20/200

IP55 flush mounting frame - 3 modules

Frames for IP55 flush mounted horizontal installations.
1-gang - 3 modules.
For 1, 2 or 3 module devices.
Size (width x height): 110 x 90 mm.
Protection degree: IP55 (with lid closed).
Opening angle of the lid: 120°.
The lid allows operating the switch in closed position.

Article-No.	Size	Modularity	Order-No.	Pack/Qty
N0373.55 GR	4"x2	3	2CLA037355N1702	10/100
N0373.55 BL	4"x2	3	2CLA037355N1102	10/100
N0373.55 NG	4"x2	3	2CLA037355N1502	10/100

IP55 box mounting frame - 3 modules

Frames for IP55 box mounted horizontal installations.
1-gang - 3 modules.
For 1, 2 or 3 module devices.
Size (width x height): 110 x 90 mm.
Protection degree: IP55 (with lid closed).
Opening angle of the lid: 120°.
The lid allows operating the switch in closed position.

Article-No.	Size	Modularity	Order-No.	Pack/Qty
N0393.55 GR	4"x2	3	2CLA037355N1702	5/50

Origen
Frames for VDE square boxes

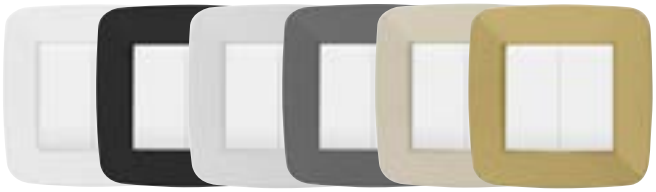

Frames - 1 and 2 modules
Material: polycarbonate
Size (width x height):
- 1M: 80 x 80 mm.
- 2M: 80 X 80 mm.
- 4M (2+2M): 120 x 80 mm.
- 6M (2+2+2M): 142 X 80 mm.
- 8M (2+2+2+2M): 208 x 80 mm.

Mounting plate and screws included.

White - ABB logo

Article-No.	Size	Modularity	Order-No.	Pack/Qty
N0171.1 BL	1M	1	2CLA017110N1102	18/180
N0271.1 BL	2M	2	2CLA027110N1102	18/180
N0272.1 BL	4M	4	2CLA027210N1102	10/100
N0273.1 BL	6M	6	2CLA027310N1102	7/70
N0274.1 BL	8M	8	2CLA027410N1102	5/50

Graphite - ABB logo

Article-No.	Size	Modularity	Order-No.	Pack/Qty
N0171.1 GF	1M	1	2CLA017110N1802	18/180
N0271.1 GF	2M	2	2CLA027110N1802	18/180
N0272.1 GF	4M	4	2CLA027210N1802	10/100
N0273.1 GF	6M	6	2CLA027310N1802	7/70
N0274.1 GF	8M	8	2CLA027410N1802	5/50

Black - ABB logo

Article-No.	Size	Modularity	Order-No.	Pack/Qty
N0171.1 NG	1M	1	2CLA017110N1502	18/180
N0271.1 NG	2M	2	2CLA027110N1502	18/180
N0272.1 NG	4M	4	2CLA027210N1502	10/100
N0273.1 NG	6M	6	2CLA027310N1502	7/70
N0274.1 NG	8M	8	2CLA027410N1502	5/50

Champagne - ABB logo

Article-No.	Size	Modularity	Order-No.	Pack/Qty
N0171.1 CH	1M	1	2CLA017110N1902	18/180
N0271.1 CH	2M	2	2CLA027110N1902	18/180
N0272.1 CH	4M	4	2CLA027210N1902	10/100
N0273.1 CH	6M	6	2CLA027310N1902	7/70
N0274.1 CH	8M	8	2CLA027410N1902	5/50

Silver - ABB logo

Article-No.	Size	Modularity	Order-No.	Pack/Qty
N0171.1 PL	1M	1	2CLA017110N1302	18/180
N0271.1 PL	2M	2	2CLA027110N1302	18/180
N0272.1 PL	4M	4	2CLA027210N1302	10/100
N0273.1 PL	6M	6	2CLA027310N1302	7/70
N0274.1 BL	8M	8	2CLA027410N1302	5/50

Gold - ABB logo

Article-No.	Size	Modularity	Order-No.	Pack/Qty
N0171.1 PL	1M	1	2CLA017110N1702	18/180
N0271.1 PL	2M	2	2CLA027110N1702	18/180
N0272.1 PL	4M	4	2CLA027210N1702	10/100
N0273.1 PL	6M	6	2CLA027310N1702	7/70
N0274.1 BL	8M	8	2CLA027410N1702	5/50

RED - ABB logo

Article-No.	Size	Modularity	Order-No.	Pack/Qty
N0271.1 RJ	2M	2	2CLA027110N7002	18/180

To make your work easier, we've created these to support you

IVIE
Switch to the future.

Stylish design in three delightful colours which perfectly matches any interior. A comprehensive offer of premium modular wiring accessories provides advanced functions like dimming, USB charging, automatic switching based on movement, home automation. A clever combination of style, quality, safety and energy savings.

Different finishes and combinations:
01 Anthracite grey mechanisms in Silver plate
02 Silver mechanisms in Anthracite Grey plate
03 Anthracite grey mechanisms in White plate

Materials
Cover: thermoplastic cover (PC), impact-proof and fracture-resistant, UV-resistant, free of PVC and halogen.

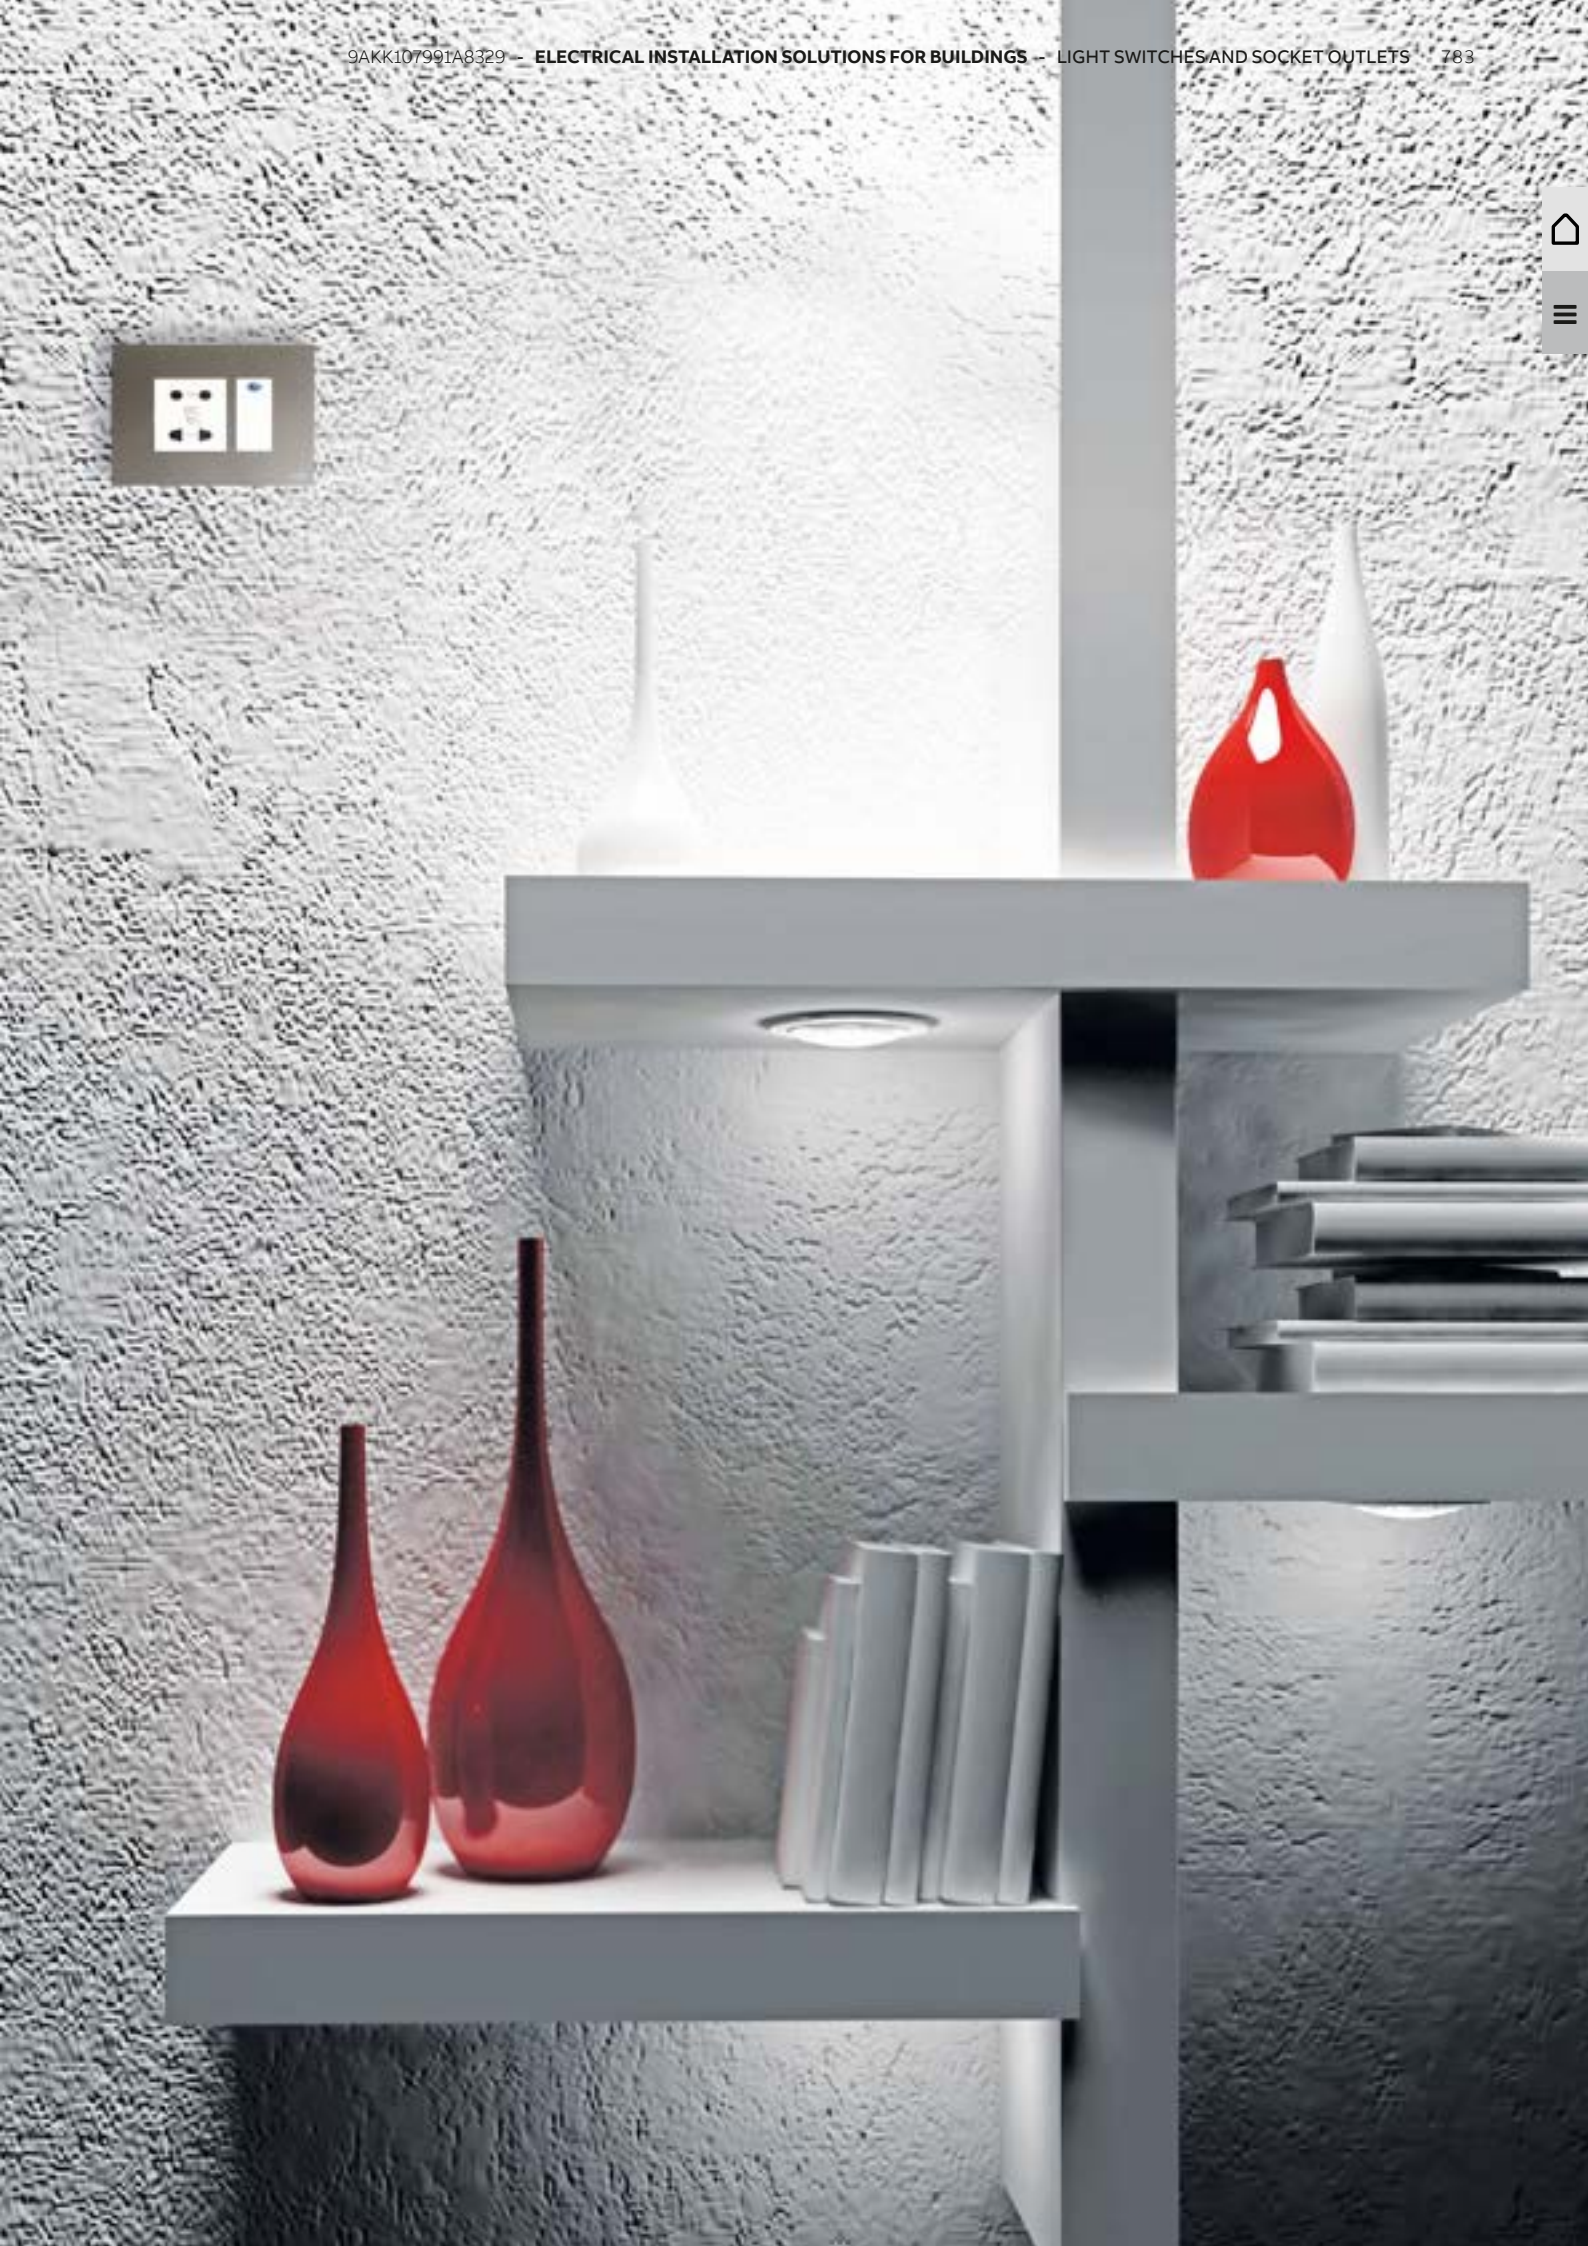

IVIE

Rocker switches / push switches

Switch 1 way

6 A - 240 V ~
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIS10610 BL**	1SYK100001A1001	20/400
anthracite grey	**IIS10610 AN**	1SYK100001A1201	20/400
silver	**IIS10610 PL**	1SYK100001A1101	20/400

Switch 2 way

6 A - 240 V ~
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIS10620 BL**	1SYK100001A1002	20/400
anthracite grey	**IIS10620 AN**	1SYK100001A1202	20/400
silver	**IIS10620 PL**	1SYK100001A1102	20/400

Switch 1 way

16 A - 240 V ~
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIS11610 BL**	1SYK100001A1006	20/400
anthracite grey	**IIS11610 AN**	1SYK100001A1206	20/400
silver	**IIS11610 PL**	1SYK100001A1106	20/400

Switch 1 way with indicator

16 A - 240 V ~
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIS1161L BL**	1SYK100001A1007	20/400
anthracite grey	**IIS1161L AN**	1SYK100001A1207	20/400
silver	**IIS1161L PL**	1SYK100001A1107	20/400

Switch DP

32 A - 240 V ~
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIS2321L BL**	1SYK100001A1008	10/200
anthracite grey	**IIS2321L AN**	1SYK100001A1208	10/200
silver	**IIS2321L PL**	1SYK100001A1108	10/200

Push button with bell symbol

6A
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIS106B0 BL**	1SYK100001A1003	20/400
anthracite grey	**IIS106B0 AN**	1SYK100001A1203	20/400

Push button with bell symbol

6A
With indicator
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIS106BL BL**	1SYK100001A1004	20/400
anthracite grey	**IIS106BL AN**	1SYK100001A1204	20/400

Mega push button with bell symbol

6A
With indicator
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIS206BL BL**	1SYK100001A1005	20/400
anthracite grey	**IIS206BL AN**	1SYK100001A1205	20/400

Card switch 1-gang, 1-way, DP

Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**N2214.1 BL**	2CLA221410N1102	1
anthracite grey	**N2214.1 AN**	2CLA221410N1802	1
silver	**N2214.1 PL**	2CLA221410N1302	1

IVIE
Socket outlets

Sockets - 240 V ~

6A, 2+3 pin socket
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIK20006 BL**	1SYK100001A1021	10/200
anthracite grey	**IIK20006 AN**	1SYK100001A1221	10/200
silver	**IIK20006 PL**	1SYK100001A1121	10/200

Sockets - 240 V ~

6/13A universal socket
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIK20613 BL**	1SYK100001A1022	10/200
anthracite grey	**IIK20613 AN**	1SYK100001A1222	10/200
silver	**IIK20613 PL**	1SYK100001A1122	10/200

Sockets - 240 V ~

6/16A socket
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIK20616 BL**	1SYK100001A1023	10/200
anthracite grey	**IIK20616 AN**	1SYK100001A1223	10/200
silver	**IIK20616 PL**	1SYK100001A1123	10/200

Sockets - 240 V ~

6/20A socket
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIK20620 BL**	1SYK100001A1024	10/200
anthracite grey	**IIK20620 AN**	1SYK100001A1224	10/200
silver	**IIK20620 PL**	1SYK100001A1124	10/200

Sockets - 240 V ~

6/25A socket
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIK20625 BL**	1SYK100001A1025	10/200
anthracite grey	**IIK20625 AN**	1SYK100001A1225	10/200
silver	**IIK20625 PL**	1SYK100001A1125	10/200

Sockets - 240 V ~

6A 2 pin socket
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIK10006 BL**	1SYK100001A1026	20/400
anthracite grey	**IIK10006 AN**	1SYK100001A1226	20/400
silver	**IIK10006 PL**	1SYK100001A1126	20/400

Euro-American earthed socket outlet

240 V ~
Rated voltage: 125/250 Vac
Rated current: 15/16A
2P+E/ NEMA 5-15R
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**N2238 BL**	2CLA223800N1102	10
anthracite grey	**N2238 AN**	2CLA223800N1802	10
silver	**N2238 PL**	2CLA223800N1302	10

Euro-American unearthed socket outlet

240 V ~
Rated voltage: 125/250 V AC
Rated current: 15/16A
2P (non-earthed)/NEMA 1-15R
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2135 BL**	2CLA213500N1102	20
anthracite grey	**N2135 AN**	2CLA213500N1802	20
silver	**N2135 PL**	2CLA213500N1302	20

IVIE

Socket outlets

British standard socket outlet

240 V ~
Rated current: 13A
2 P+E
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**N2237 BL**	2CLA223700N1102	10
anthracite grey	**N2237 AN**	2CLA223700N1302	10
silver	**N2237 PL**	2CLA223700N1802	10

Shaver Socket

Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIM2SVSK BL**	1SYK100001A1057	5/100
anthracite grey	**IIM2SVSK AN**	1SYK100001A1257	5/100
silver	**IIM2SVSK PL**	1SYK100001A1157	5/100

USB chargers

USB charger 750mA, 1-gang

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2185 BL**	2CLA218500N1102	1
anthracite grey	**N2185 AN**	2CLA218500N1802	1
silver	**N2185 PL**	2CLA218500N1302	1

USB charger 2.000mA, 1-gang

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2185.2 BL**	2CLA218520N1102	1
anthracite grey	**N2185.2 AN**	2CLA218520N1802	1
silver	**N2185.2 PL**	2CLA218520N1302	1

USB charger 1.500mA, 2-gang

Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**N2285 BL**	2CLA228500N1102	1
anthracite grey	**N2285 AN**	2CLA228500N1802	1
silver	**N2285 PL**	2CLA228500N1302	1

Blank plates

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIM1BLNK BL**	1SYK100001A1041	20/400
anthracite grey	**IIM1BLNK AN**	1SYK100001A1241	20/400
silver	**IIM1BLNK PL**	1SYK100001A1141	20/400

IVIE
Dimmers

Dimmer & fan regulators

Step fan regulator 5 step
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIM2FR05 BL**	1SYK100001A1042	5/100
anthracite grey	**IIM2FR05 AN**	1SYK100001A1242	5/100
silver	**IIM2FR05 PL**	1SYK100001A1142	5/100

Dimmer & fan regulators

Step fan regulator 4 step
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIM1FR04 BL**	1SYK100001A1043	10/200
anthracite grey	**IIM1FR04 AN**	1SYK100001A1243	10/200
silver	**IIM1FR04 PL**	1SYK100001A1143	10/200

Dimmer & fan regulators

Dimmer 400 Watt
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIM2D400 BL**	1SYK100001A1045	10/200
anthracite grey	**IIM1D400 AN**	1SYK100001A1245	10/200
silver	**IIM1D400 PL**	1SYK100001A1145	10/200

Universal rotatory/push dimmer

Number of modules: 2
Rated voltage: 230 V AC
Max. power: Incandescent: 500 W
Halogen lamp with electronic transformer: 500 VA
Halogen lamp with ferromagnetic transformer: 400 VA

Colour	Type	Order code	Pack/Qty.
white	**N2260.2 BL**	2CLA226020N1102	1
anthracite grey	**N2260.2 AN**	2CLA226020N1802	1
silver	**N2260.2 PL**	2CLA226020N1302	1

LED rotatory/push dimmer

Number of modules: 2
Rated voltage: 230 V AC
Nominal power: 250 W/VA
Power (min./max load): LEDi: 2/100 W/VA (max. 10 lamps)
Dimmable energy saving lamps: 2/100 W/VA (max. 10 lamps)
LV LEDi with transformer (only type L or LC): 4/100 W/VA (max. 10 lamps)
Incandescent lamps: 10/250 W/VA
Halogen lamps: 10/250 W/VA
LV halogen with transformer (only type L or LC): 10/250 W/VA (max. 10 lamps)
2 wire connection
Optional: auxiliary on/off with 2-way switch N2X02

Colour	Type	Order code	Pack/Qty.
white	**N2260.3 BL**	2CLA226030N1102	1
anthracite grey	**N2260.3 AN**	2CLA226030N1802	1
silver	**N2260.3 PL**	2CLA226030N1302	1

LED rotatory/push dimmer

Number of modules: 2
Rated voltage: 127 V AC
Frequency: 50/60 Hz (Nominal power: 140 W/VA)
Power (min./max load): LEDi: 2/55 W/VA (max. 10 lamps)
Dimmable energy saving lamps: 2/55 W/VA (max. 10 lamps)
LV LEDi with transformer (only type L or LC): 4/55 W/VA (max. 10 lamps)
Incandescent lamps: 10/140 W/VA
Halogen lamps: 10/140 W/VA
LV halogen with transformer (only type L or LC): 10/140 W/VA (max. 10 lamps)

Colour	Type	Order code	Pack/Qty.
white	**N2260.8 BL**	2CLA226080N1102	1
anthracite grey	**N2260.8 AN**	2CLA226080N1802	1
silver	**N2260.8 PL**	2CLA226080N1302	1

1-10V rotary dimmer

Number of modules: 2
Rated voltage: 127 - 230 V AC / 50 - 60 Hz
Max. power: 230 V AC: 700 VA, 127 V AC: 350 VA
Max. 6 ballasts per device

Colour	Type	Order code	Pack/Qty.
white	**N2260.9 BL**	2CLA226090N1102	1
anthracite grey	**N2260.9 AN**	2CLA226090N1802	1
silver	**N2260.9 PL**	2CLA226090N1302	1

IVIE
Data communication

2x RCA connection unit

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2155.2 BL**	2CLA215520N1102	1
anthracite grey	**N2155.2 AN**	2CLA215520N1802	1
silver	**N2155.2 PL**	2CLA215520N1302	1

3x RCA connection unit

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2155.3 BL**	2CLA215530N1102	1
anthracite grey	**N2155.3 AN**	2CLA215530N1802	1
silver	**N2155.3 PL**	2CLA215530N1302	1

Mini-Jack connection unit

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2155.4 BL**	2CLA215540N1102	1
anthracite grey	**N2155.4 AN**	2CLA215540N1802	1
silver	**N2155.4 PL**	2CLA215540N1302	1

VGA connection unit

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2155.5 BL**	2CLA215550N1102	1
anthracite grey	**N2155.5 AN**	2CLA215550N1802	1
silver	**N2155.5 PL**	2CLA215550N1302	1

HDMI connection unit

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2155.6 BL**	2CLA215560N1102	1
anthracite grey	**N2155.6 AN**	2CLA215560N1802	1
silver	**N2155.6 PL**	2CLA215560N1302	1

HDMI female-female connection unit

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2155.7 BL**	2CLA215570N1102	1
anthracite grey	**N2155.7 AN**	2CLA215570N1802	1
silver	**N2155.7 PL**	2CLA215570N1302	1

USB connection unit

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2155.8 BL**	2CLA215580N1102	1
anthracite grey	**N2155.8 AN**	2CLA215580N1802	1
silver	**N2155.8 PL**	2CLA215580N1302	1

USB female-female connection unit

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2155.9 BL**	2CLA215590N1102	1
anthracite grey	**N2155.9 AN**	2CLA215590N1802	1
silver	**N2155.9 PL**	2CLA215590N1302	1

IVIE

Data communication

Data & Voice

RJ11 Tel. jack 2 pin
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIM1RJ11 BL**	1SYK100001A1047	20/400
anthracite grey	**IIM1RJ11 AN**	1SYK100001A1247	20/400
silver	**IIM1RJ11 PL**	1SYK100001A1147	20/400

Data & Voice

RJ45 Jack cat 6
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIM1RJ45 BL**	1SYK100001A1048	20/400
anthracite grey	**IIM1RJ45 AN**	1SYK100001A1248	20/400
silver	**IIM1RJ45 PL**	1SYK100001A1148	20/400

TV Socket

TV co-axial socket
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIM1TVSK BL**	1SYK100001A1049	20/400
anthracite grey	**IIM1TVSK AN**	1SYK100001A1249	20/400
silver	**IIM1TVSK PL**	1SYK100001A1149	20/400

Room thermostats

Digital room thermostat

Number of modules: 2
Maximum load: 3A cos = 0,5
Output relay operation modes: Hysteresis: 0.5º C
Pulse-width modulation: with a ±4ºC difference with the set-point temperature
Variable from 100% to 0% modulation
To be installed with N2240.5 cover plates

Colour	Type	Order code	Pack/Qty.
white	**8140.5**	2CLA814050A1002	1

Cover plate for digital thermostat

Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**N2240.5 BL**	2CLA224050N1102	1
anthracite grey	**N2240.5 AN**	2CLA224050N1802	1
silver	**N2240.5 PL**	2CLA224050N1302	1

IVIE
Multimedia

Multiroom sound module

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**9368.1**	2CLA936810A1001	1

Remote control for multiroom sound module

Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**9368.2**	2CLA936820A1001	1

Cover plate for radio/remote control modules

Colour	Type	Order code	Pack/Qty.
white	**N2268 BL**	2CLA226800N1102	1

FM-radio and alarm module

Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**9368- FM**	2CLA936800A1001	1

Cover plate for radio/remote control modules

Colour	Type	Order code	Pack/Qty.
white	**N2268 BL**	2CLA226800N1102	1

Auxiliary module

Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**9368.3**	2CLA936830A1001	1

Cover plate for I/O + USB + Bluetooth module



Colour	Type	Order code	Pack/Qty.
white	**N2268.3 BL**	2CLA226830N1102	1

Speaker connection unit

Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**N2257.1 BL**	2CLA225710N1102	1

IVIE

Movement detectors

110° motion sensor

Number of modules: 2
Max. power:
- Incandescent: 1.800W @230V AC/1.000W @127V AC
- Halogen with electronic o ferromagnetic transformer: 750VA @230V AC/400VA @127V AC
- Fluorescent lamps or motors: 400VA @230V AC/ 200VA @127V AC

For automatic switching of devices dependent on motion and brightness
With integrated selector switch for automatic ON-OFF in the front side
Switch-off delay: 10 sec. to 10 min. or short-time pulse 1 sec adjustable (from the front side)
Detection range: 5 m radius
Adjustable light set point level for activation (from the front side)
Detection angle: 110°
Mounting height: 1, 2 m auxiliary control with N2X04.X push-buttons

Colour	Type	Order code	Pack/Qty.
white	**N2241 BL**	2CLA224100N1102	1
anthracite grey	**N2241 AN**	2CLA224100N1802	1
silver	**N2241 PL**	2CLA224100N1302	1

Buzzer / Door bell

Buzzer & door bell

Buzzer
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIM2BUZR BL**	1SYK100001A1054	5/100
anthracite grey	**IIM2BUZR AN**	1SYK100001A1254	5/100
silver	**IIM2BUZR PL**	1SYK100001A1154	5/100

Buzzer

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2119 BL**	2CLA211900N1102	1
anthracite grey	**N2119 AN**	2CLA211900N1802	1
silver	**N2119 PL**	2CLA211900N1302	1

Buzzer



Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**N2219 BL**	2CLA221900N1102	1
anthracite grey	**N2219 AN**	2CLA221900N1802	1
silver	**N2219 PL**	2CLA221900N1302	1

Electronic door bell 230 V AC



Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**N2224 BL**	2CLA222400N1102	1
anthracite grey	**N2224 AN**	2CLA222400N1802	1
silver	**N2224 PL**	2CLA222400N1302	1

IVIE

Signaling and lighting systems

Indicator

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIM1INDI BL**	1SYK100001A1053	20/400
anthracite grey	**IIM1INDI AN**	1SYK100001A1253	20/400
silver	**IIM1INDI PL**	1SYK100001A1153	20/400

LED white signaling light

Number of modules: 1
Lamp: white LED
Luminous flux: > 2 lumen at 1 meter, white diffuser

Colour	Type	Order code	Pack/Qty.
white	**N2180 BL**	2CLA218000N1102	5

LED red signaling light

Number of modules: 1
Lamp: white LED
Luminous flux: > 2 lumen at 1 meter, Red diffuser

Colour	Type	Order code	Pack/Qty.
white	**N2180 RJ**	2CLA218000N1602	1

LED green signaling light

Number of modules: 1
Lamp: white LED
Luminous flux: > 2 lumen at 1 meter, Green diffuser

Colour	Type	Order code	Pack/Qty.
white	**N2180 VD**	2CLA218000N1802	1

LED signaling light

Number of modules: 2
Lamp: white LED
Luminous flux: > 2 lumen at 1 meter, White diffuser

Colour	Type	Order code	Pack/Qty.
white	**N2280 BL**	2CLA228000N1102	1

Beacon LED light

Number of modules: 2
Lamp: white LED
Luminous flux: > 2 lumen at 1 meter, white diffuser
Autonomy: 3 hours (1 hour at maximum illumination
2 hours with lower illumination)
Battery: Ni-MH (estimated lifetime: 4 years)

Colour	Type	Order code	Pack/Qty.
white	**N2281 BL**	2CLA228100N1102	1

DND & MMR

DND and MMR set internal & external
Number of modules: 2+3

Colour	Type	Order code	Pack/Qty.
white	**IIM1DNDS BL**	1SYK100001A1055	5/100
anthracite grey	**IIM1DNDS AN**	1SYK100001A1255	5/100
silver	**IIM1DNDS PL**	1SYK100001A1155	5/100

DND/MUR 2-gang interlocked switch

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2244.5 BL**	2CLA224450N1102	1
anthracite grey	**N2244.5 AN**	2CLA224450N1802	1
silver	**N2244.5 PL**	2CLA224450N1302	1

LED MUR signaling light

Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**N2180.5 BL**	2CLA218050N1102	1
anthracite grey	**N2180.5 AN**	2CLA218050N1802	1
silver	**N2180.5 PL**	2CLA218050N1302	1

LED DND signaling light

Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**N2180.4 BL**	2CLA218040N1102	1
anthracite grey	**N2180.4 AN**	2CLA218040N1802	1
silver	**N2180.4 PL**	2CLA218040N1302	1

IVIE

Other products

Starters

Single Phase Starter 20A
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIM2ST20 BL**	1SYK100001A1051	5/100

Starters

Single Phase Starter 25A
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIM2ST25 BL**	1SYK100001A1052	5/100

Down lighter

Number of modules: 3

Colour	Type	Order code	Pack/Qty.
white	**IIM3DOWN BL**	1SYK100001A1059	5/100
anthracite grey	**IIM3DOWN AN**	1SYK100001A1259	5/100
silver	**IIM3DOWN PL**	1SYK100001A1159	5/100

Cover frames

Plate with frame

1M plate
Number of modules: 1

Colour	Type	Order code	Pack/Qty.
white	**IIP0133 BL**	1SYK100001A1071	15/360
anthracite grey	**IIP0133 AN**	1SYK100001A1271	15/360
silver	**IIP0133 PL**	1SYK100001A1171	15/360

Plate with frame

2M plate
Number of modules: 2

Colour	Type	Order code	Pack/Qty.
white	**IIP0233 BL**	1SYK100001A1072	15/360
anthracite grey	**IIP0233 AN**	1SYK100001A1272	15/360
silver	**IIP0233 PL**	1SYK100001A1172	15/360

Plate with frame

3M plate power
Number of modules: 3

Colour	Type	Order code	Pack/Qty.
white	**IIPP343 BL**	1SYK100001A1073	10/240
anthracite grey	**IIPP343 AN**	1SYK100001A1273	10/240
silver	**IIPP343 PL**	1SYK100001A1173	10/240

Plate with frame

3M plate
Number of modules: 3

Colour	Type	Order code	Pack/Qty.
white	**IIP0343 BL**	1SYK100001A1074	10/240
anthracite grey	**IIP0343 AN**	1SYK100001A1274	10/240
silver	**IIP0343 PL**	1SYK100001A1174	10/240

IVIE
Cover frames

Plate with frame

4M plate
Number of modules: 4

Colour	Type	Order code	Pack/Qty.
white	**IIP0453 BL**	1SYK100001A1075	10/190
anthracite grey	**IIP0453 AN**	1SYK100001A1275	10/190
silver	**IIP0453 PL**	1SYK100001A1175	10/190

Plate with frame

6M plate
Number of modules: 6

Colour	Type	Order code	Pack/Qty.
white	**IIP0683 BL**	1SYK100001A1076	5/120
anthracite grey	**IIP0683 AN**	1SYK100001A1276	5/120
silver	**IIP0683 PL**	1SYK100001A1176	5/120

Plate with frame

8M plate
Number of modules: 8

Colour	Type	Order code	Pack/Qty.
white	**IIP0893 BL**	1SYK100001A1077	5/120
anthracite grey	**IIP0893 AN**	1SYK100001A1277	5/120
silver	**IIP0893 PL**	1SYK100001A1177	5/120

Plate with frame

8M plate square
Number of modules: 8

Colour	Type	Order code	Pack/Qty.
white	**IIP0855 BL**	1SYK100001A1078	5/95
anthracite grey	**IIP0855 AN**	1SYK100001A1278	5/95
silver	**IIP0855 PL**	1SYK100001A1178	5/95

Plate with frame

12M plate
Number of modules: 12

Colour	Type	Order code	Pack/Qty.
white	**IIP1286 BL**	1SYK100001A1079	5/95
anthracite grey	**IIP1286 AN**	1SYK100001A1279	5/95
silver	**IIP1286 PL**	1SYK100001A1179	5/95

Plate with frame

18M plate
Number of modules: 18

Colour	Type	Order code	Pack/Qty.
white	**IIP1888 BL**	1SYK100001A1080	5/40
anthracite grey	**IIP1888 AN**	1SYK100001A1280	5/40
silver	**IIP1888 PL**	1SYK100001A1180	5/40

IVIE
Installation boxes

Flush boxes

1-2 M Metal Box
Number of modules: 1/2

Colour	Type	Order code	Pack/Qty.
	IAB0233W	1SYK100001A1441	24

Flush boxes

3 M Metal Box
Number of modules: 3

Colour	Type	Order code	Pack/Qty.
	IAB0343W	1SYK100001A1442	18

Flush boxes

4 M Metal Box
Number of modules: 4

Colour	Type	Order code	Pack/Qty.
	IAB0453W	1SYK100001A1443	18

Flush boxes

6 M Metal Box
Number of modules: 6

Colour	Type	Order code	Pack/Qty.
	IAB0683W	1SYK100001A1444	12

Flush boxes

8 M Metal Box
Number of modules: 8

Colour	Type	Order code	Pack/Qty.
	IAB0893W	1SYK100001A1445	12

Flush boxes

8 M Metal Box Square
Number of modules: 8

Colour	Type	Order code	Pack/Qty.
	IAB0855W	1SYK100001A1446	7

Flush boxes

12M Metal Box
Number of modules: 12

Colour	Type	Order code	Pack/Qty.
	IAB1286W	1SYK100001A1447	5

Flush boxes

18 M Metal Box
Number of modules: 18

Colour	Type	Order code	Pack/Qty.
	IAB1888W	1SYK100001A1448	5

ABB Tvisha
Key features

Introducing the ABB Tvisha range, a collection of wiring accessories designed with a sleek, flat surface that adds a touch of elegance to any wall with its sophisticated Euro white finish.
This versatile range offers a wide array of functionalities, extending beyond standard switching to include USB chargers, HDMI ports, communication sockets, foot lamps, and dimmers.
Perfectly suited for both residential and commercial applications, ABB Tvisha meets all your wiring needs with style and efficiency.



- Plastic parts which holds current carrying parts are made of PA6 20% glass filled rating upto 16A
- All switches are marked with IS 3854:1997
- Terminals are designed in such a way that wire is tightened without damage
- Bi-metal silver contact tips for less spark and longer life
- 6A & 6/16A marked with IS 1293, up to 16A
- Non-flammable thermoplastic resin parts and a very high insulating resistance after humidity test

ABB Tvisha
Features and benefits

Internal arc shield provided in switch mechanism

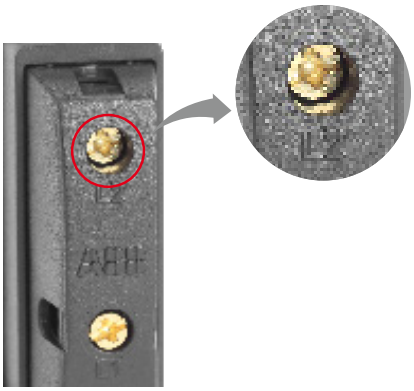

Terminal screws with Combihead for star /flat screw drivers.

Easy terminal accessibility by top entry to load connection.

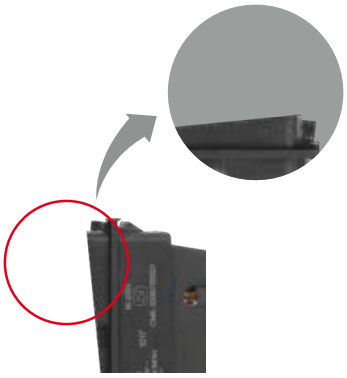

ISI marking on switch socket and fan regulator and laser marked.



Laser marking and arrow showing the correct orientation of the mechanism.

20A DP switch in one module (space optimisation)

ABB Tvisha
Features and benefits

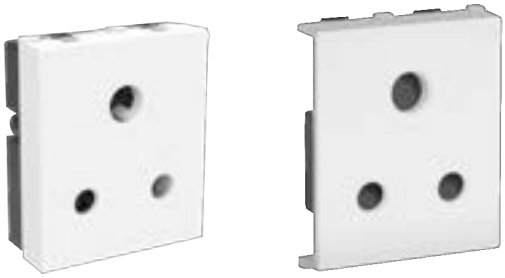

Large variety of sockets, equipped with shutters for increased safety.

Universal regulator with 360 degree rotation.



6/16A sockets are equipped with dual shutters which can take two pin plugs.

HDMI moduler ports equipped with female connector for easy termination.

USB charger current rating 1A and 2A, visible LED indication, Dual color LED indication for on load & without load operation.

Communication mechanisms – RJ-11, RJ-45 cat6. Self-moving shutter to screen the jack when it is not in use.

ABB Tvisha
Features and benefits

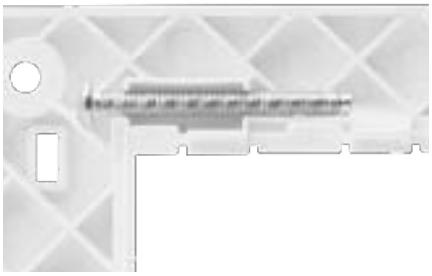

Two module partition is provided for sturdiness with extra ribs to ensure better strength of the frame and overlap of plugs.

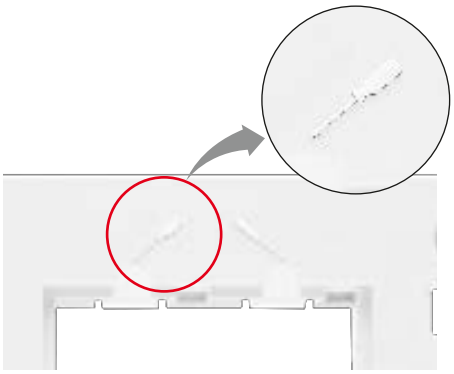

Visual signs provided in inner grids to guide proper fitment for easy installation and easy removal during fitment of mechanism with inner grid.

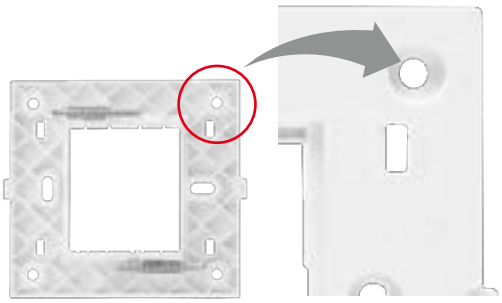

Resin frame with extra ribs provides better mechanical strength, insulation resistance and corrosion proof.

ABB warranty policy for Tvisha range

- 10 years for mechanical switches and sockets
- Two year for electronic devices

ABB Tvisha

Switches, sockets and support accessories

Switches

ITS10610 BL 6A 1 way switch

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1501	20

Switches

ITS11610 BL 16A 1 way switch

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1506	20

Switches

ITS1061L BL 6A 1 way switch with Ind.

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1502	20

Switches

ITS1161L BL 16A 1 way switch with Ind.

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1507	20

Switches

ITS10620 BL 6A 2 way switch

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1503	20

Switches

ITS1201L BL 20A DP Switch 1 way with Ind.

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1508	20

Switches

ITS106B0 BL 6A Bell switch

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1504	20

Switches

ITS206BL BL 6A Bell Mega switch with Ind.

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1509	10

Switches

ITS106BL BL 6A Bell switch with Ind.

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1505	20

Switches

ITS2062L BL 6A 2 way Mega switch with Ind.

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1510	10

ABB Tvisha

Switches, sockets and support accessories

Switches

ITS2162L BL 16A 2 way Mega switch with Ind.

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1511	10

Switches

ITS2321L BL 32A 1 Way DP Mega switch with Ind.

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1512	10

Sockets

ITK20006 RW N 6A 3 Pin Socket

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1829	10

Sockets

ITK20616 RW 6/16A Socket

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1823	10

USB C Type & A+C Type chargers NEW

ITM1USBC RW 3A 15W 1M USB C type Charger

Module size	Type	Order code	Pack/Qty.
1	-	1SYK100001A1858	1

USB C Type & A+C Type chargers NEW

ITM2USBC RW 3A 15W 2M USB A+C type Charger

Module size	Type	Order code	Pack/Qty.
2	-	1SYK100001A1859	1

Support accessories

ITM1BLNK BL Blank plate

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1541	20

Support accessories

ITM2FR05 BL Fan regulator 5 step

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1542	5

Support accessories

ITM1FR04 BL Fan regulator 4 step

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1543	10

Support accessories

ITM1RJ11 BL RJ 11TEL 2 Pin

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1544	20

ABB Tvisha

Switches, sockets and support accessories

Support accessories

ITM1RJ45 BL RJ 45 Jack CAT 6

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1545	20

Support accessories

ITM1TVSK BL TV socket

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1546	20

Support accessories

ITM1FLEX BL Flex outlet

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1547	20

Support accessories

ITM2LDFL BL LED foot lamp

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1550	10

Support accessories

ITM1INDI BL Indicator

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1551	5

Support accessories

ITM1USBC BL USB Charger 1A

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1552	5

Support accessories

ITM2USBC BL USB charger 2A

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1553	10

Support accessories

ITM1HDMI BL HDMI Port 2.0

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1554	20

Support accessories

ITM1D400 BL Dimmer 400W

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1548	20

Support accessories

ITM2D1000 BL Dimmer 1000W

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1549	20

ABB Tvisha

Switches, sockets and support accessories

Support accessories

ITM2MS20 BL Single Phase Starter 20A

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1555	5

Support accessories

ITM2MS25 BL Single Phase Starter 25A

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1556	5

Plates and flush box

Plates

ITP0133 BL 1 M Plate

Module size	Type	Order code	Pack/Qty.
1 M	-	1SYK100001A1571	15

Plates

ITP0233 BL 2 M Plate

Module size	Type	Order code	Pack/Qty.
2 M	-	1SYK100001A1572	15

Plates

ITPP343 BL 3 M Plate power

Module size	Type	Order code	Pack/Qty.
3 M	-	1SYK100001A1573	10

Plates



ITP0453 BL 4 M Plate

Module size	Type	Order code	Pack/Qty.
4 M	-	1SYK100001A1574	10

Plates

ITP0683 BL 6 M Plate

Module size	Type	Order code	Pack/Qty.
6 M	-	1SYK100001A1575	5

ABB Tvisha

Plates and flush box

Plates

ITP0893 BL 8 M Plate

Module size	Type	Order code	Pack/Qty.
8 M	-	1SYK100001A1576	5

Plates

ITP0855 BL 8 M Plate square

Module size	Type	Order code	Pack/Qty.
8 M	-	1SYK100001A1577	5

Plates

ITP1286 BL 12 M Plate

Module size	Type	Order code	Pack/Qty.
12 M	-	1SYK100001A1578	5

Plates



ITP1696 BL 16M Plate

Module size	Type	Order code	Pack/Qty.
16 M	-	1SYK100001A1579	5

Plates

ITP1888 BL 18M Plate

Module size	Type	Order code	Pack/Qty.
18 M	-	1SYK100001A1580	5

Metal flush boxes

Metal Box 1-2M - CMBZ3302

Module size	Type	Order code	Pack/Qty.
1/2	-	1SYN880452R0001	108

Metal flush boxes

Metal Box 3M - CMBZ4303

Module size	Type	Order code	Pack/Qty.
3	-	1SYN880453R0001	82

Metal flush boxes

Metal Box 4-5M - CMBZ5305

Module size	Type	Order code	Pack/Qty.
4	-	1SYN880454R0001	60

Metal flush boxes

Metal Box 6M - CMBZ8306

Module size	Type	Order code	Pack/Qty.
6	-	1SYN880463R0001	40

Metal flush boxes

Metal Box 8M - CMBZ9308

Module size	Type	Order code	Pack/Qty.
8	-	1SYN880464R0001	39

ABB Tvisha

Plates and flush box

Metal flush boxes

Metal Box 8MV - CMBZ5508V

Module size	Type	Order code	Pack/Qty.
8	-	1SYN880456R0001	26

Metal flush boxes

Metal Box 12M - CMBZ8612

Module size	Type	Order code	Pack/Qty.
12	-	1SYN880465R0001	16

Metal flush boxes

Metal Box 16M - CMBZ9616

Module size	Type	Order code	Pack/Qty.
12	-	1SYN880466R0001	15

Metal flush boxes

Metal Box 18M - CMBZ8824

Module size	Type	Order code	Pack/Qty.
18	-	1SYN880462R0001	10

Dimensions

Mounting plates, Inner plates and outer plates

Mounting plates

Description	Inner plate dimensions		Centre distance for mounting		Centre distance for furniture mounting		Outer plate dimensions		Suitable metal box
	B	A	C	D	E	F	H	G	
ITP0133 BL 1 M Plate	83	88	-	59	65	70	88	97	CMBZ3302 - 1-2 M Metal box
ITP0233 BL 2 M Plate	83	88	-	59	65	70	88	97	CMBZ3302 - 1-2 M Metal box
ITPP343 BL 3 M Plate Power	83	115.7	-	87.5	65	100	88	125	CMBZ4303 - 3 M Metal box
ITP0453 BL 4 M Plate	83	148	-	120	65	126	88	157	CMBZ5305 - 4 M Metal box
ITP0683 BL 6 M Plate	83	219	-	195.5	65	195	88	228	CMBZ8306 - 6 M Metal box
ITP0893 BL 8 M Plate	83	253	- 64.1 (C1)	225 157.8(D1)	65	238	88	262	CMBZ9308 - 8 M Metal box
ITP0855 BL 8 M Plate Square	152	148	60	124	127	127	157	157	CMBZ5508V - 8 M Metal box square
ITP1286 BL 12 M Plate	152	219	68	195.5	129	195	157	228	CMBZ8612 - 12 M Metal box
ITP1696 BL 16M Plate	152	275	68 130 (C1)	236 155 (D1)	129 15 (J1)	251 15 (J2)	157	284	CMBZ9616 - 16 M Metal box
ITP1888 BL 18M Plate	221	219	136	195.5	198 20 (E1)	195	226	228	CMBZ8824 - 18 M Metal box

Inner plates



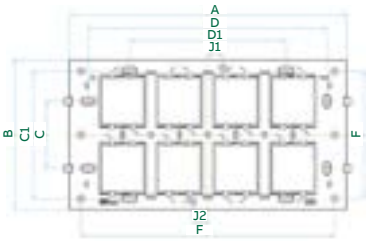

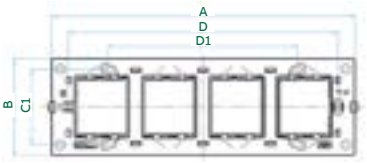



Outer plates







Notes

Millenium
Distinct sophistication.

Cool. Conspicuous. Clever. Striking metal light switches in square and ultra slim designs. Millenium surprises with its complexity and functional solutions designed for any interior, any building. A wide range of KNX sensors meet the highest of customer demands. Engineered to offer maximum comfort and happiness.

01 stainless steel
02 silk black
03 antique gold
04 matt gold
05 dune sand
06 mocha brown
07 white glass
08 black glass

Millenium

Selected functions.

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

01 1-gang 1-way switch
02 Double pole switch, with status indicator led
03 1-gang 2-way switch, premium rocker
04 Switch, with bell symbol, premium rocker
05 Double pole switch, status indicator led, 45A
06 2-gang 1-way switch
07 3-gang 2-way switch
08 BS single pole switched socket outlet
09 BS double pole round pin switched socket outlet with led
10 Universal socket outlet
11 2-gang computer outlet, RJ45
12 TV / SAT outlet
13 1-gang double rotary dimmer
14 Rotary dimmer
15 Thermostat controller, 2 pipe system with blue display
16 Bell push switch DND / MUR by LED signalling
17 2-gang switch DND / MUR by LED signaling
18 Blind control switch
19 Card switch
20 USB charging socket
21 BS socket outlet with integrated USB charger
22 FM stereo receiver with RDS
23 USB and Bluetooth® entry/exit module
24 Switch 1/2-gang ABB-free@home®
25 Switch 2/4-gang ABB-free@home®
26 Movement detector ABB-free@home®
27 Room temperature controller ABB-free@home®

01 **02**

03

04

05

06

1- to 4-gang frame
01 Side view, 4 x 86 mm
02 Frame 1-gang, 86 x 86 mm
03 Frame 1-gang, 86 x 86 mm
04 Frame 2-gang, 86 x 147 mm
05 Frame 3-gang, 86 x 228 mm
06 Frame 4-gang, 86 x 293 mm

For more information about light switch ranges visit ABB global web sites.

Features and benefits

Full range of ABB i-bus® KNX, ABB-free@home® sensors, innovative, intuitive and visually elegant. Millenium gives answer to the future by providing comfort, safety, and energy saving.

Millenium collection is a grid type system enabling combination of colours and products of different dimension and functionality. The three type of switch dimensions together with the ABB i-bus® KNX, ABB-free@home® sensors and other functions, have to be composed with the required frame in order to have the right assortment of functionality and design. In ABB i-bus® KNX sensors we have the possibility to adjoin to the frame the special metal mounting plate that allows to reduce the height so as to maintain the ultra slim line for KNX functionalities.

—
Mounting Plate

—
Premium rocker switch

—
Frame

—
01 Earth Pin Child safety shutter system. Designed to inhibit access to electricity supply
—
02 Double pole switching
—
03 Four high quality finishes combinable to reach sixteen combinations in Stainless Steel material AISI 304
—
04 Styling slim-line design frontplate profile only 4 mm
—
05 Adaptable to the market wallboxes
—
06 Load indicator in blue LED. Less energy consumption, more durability and stylish signaling
—
07 Pure Stainless Steel AISI 304 with highest corrosion protection

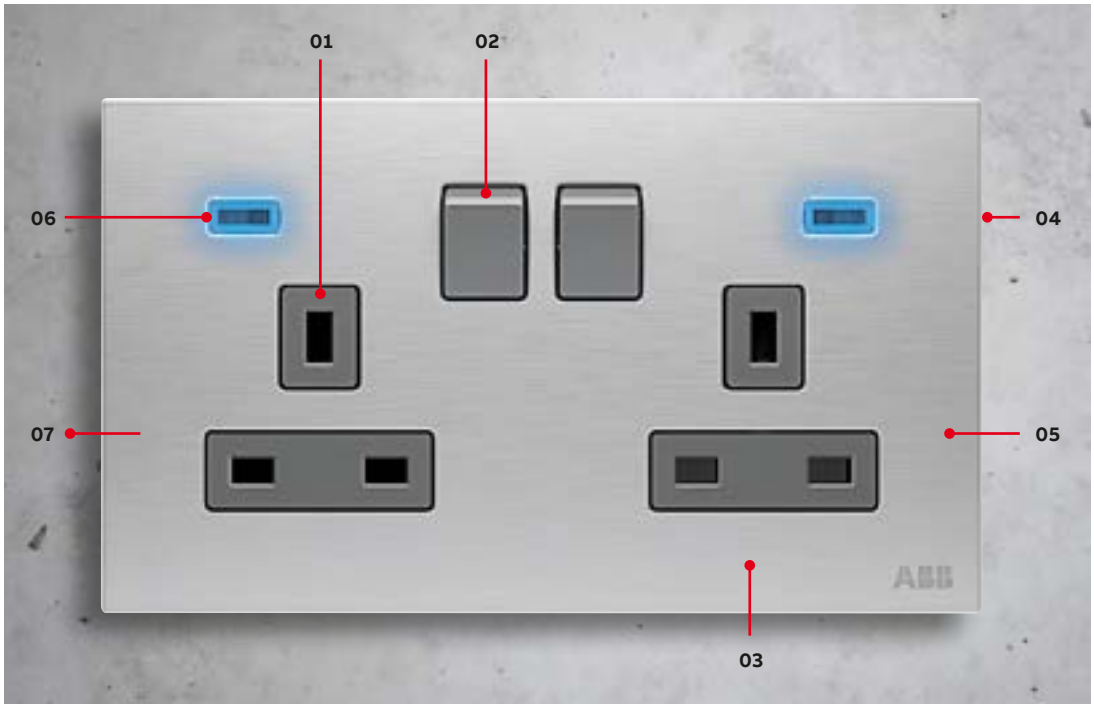

Millenium – Complete sets (AM)

ST

ST

All articles in this chapter are supplied with all the necessary parts to complete the installation of the functions.

Each article includes:
- Functional module (e.g., switch, socket outlet)
- Frame / Front plate and mounting support

1 Gang switches - Standard rocker

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, SP 10AX Rated voltage: 250Vac Rated current: 10AX		
Stainless Steel	**AM10120-ST**	2CLA610109N1101	1
	Switch 1-gang, 2-way, SP 10AX Rated voltage: 250Vac Rated current: 10AX		
Stainless Steel	**AM10520-ST**	2CLA610209N1101	1
	Switch 1-gang, intermediate, SP 10AX Rated voltage: 250Vac Rated current: 10AX		
Stainless Steel	**AM11920-ST**	2CLA611009N1101	1
	Switch 1-gang, 1-way, SP 20AX Rated voltage: 250Vac Rated current: 20AX		
Stainless Steel	**AM11020-ST**	2CLA610119N1101	1
	Switch 1-gang, 2-way, SP 20 AX Rated voltage: 250Vac Rated current: 20AX		
Stainless Steel	**AM11520-ST**	2CLA610219N1101	1

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, DP 20AX Rated voltage: 250Vac Rated current: 20AX Status indicator LED		
Stainless Steel	**AM11120-ST**	2CLA610139N1101	1
	Switch 1-gang, 1-way, DP water heater 20AX Rated voltage: 250Vac Rated current: 20AX Water heater indicator LED		
Stainless Steel	**AM10920-ST**	2CLA610149N1101	1
	Push-button 1-gang, 1-way, SP 10A Rated voltage: 250Vac Rated current: 10A		
Stainless Steel	**AM43020-ST**	2CLA610409N1101	1
	Push-button 1-gang, 1-way, SP with bell symbol Rated voltage: 250Vac Rated current: 10A Bell symbol indicator LED		
Stainless Steel	**AM42920-ST**	2CLA610449N1101	1

* Silk Black is not suitable for outdoors installation.

Millenium - Complete sets (AM)

1 Gang switches - Premium rocker

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, SP premium 10AX Rated voltage: 250Vac Rated current: 10AX Premium size rocker		
Stainless Steel	**AM10144-ST**	2CLA620109N1101	1
	Switch 1-gang, 2-way, SP premium 10AX Rated voltage: 250Vac Rated current: 10AX Premium size rocker		
Stainless Steel	**AM10544-ST**	2CLA620209N1101	1
	Switch 1-gang, intermediate, SP premium 10AX Rated voltage: 250Vac Rated current: 10AX Premium size rocker		
Stainless Steel	**AM11944-ST**	2CLA621009N1101	1
	Switch 1-gang, 1-way, SP premium 20AX Rated voltage: 250Vac Rated current: 20AX Premium size rocker		
Stainless Steel	**AM11044-ST**	2CLA620119N1101	1
	Switch 1-gang, 2-way, SP premium 20AX Rated voltage: 250Vac Rated current: 20AX Premium size rocker		
Stainless Steel	**AM11544-ST**	2CLA620219N1101	1
	Switch 1-gang, 1-way, DP premium 20AX w/LED Rated voltage: 250Vac Rated current: 20A Status indicator LED Premium size rocker		
Stainless Steel	**AM11144-ST**	2CLA620139N1101	1
	Switch 1-gang, 1-way, DP premium 32AX w/LED Rated voltage: 250Vac Rated current: 32A Premium size rocker		
Stainless Steel	**AM11244-ST**	2CLA620189N1101	1

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, DP premium 45A Rated voltage: 250Vac Rated current: 45A Status indicator LED Premium size rocker		
Stainless Steel	**AM17744-ST**	2CLA620149N1101	1
Silk Black	**AM17744-SB**	2CLA620149N1501	1
Antique Gold	**AM17744-AG**	2CLA620149N1601	1
Matt Gold	**AM17744-MG**	2CLA620149N1701	1
Dune Sand	**AM17744-DU**	2CLA620149N6201	1
Mocha Brown	**AM17744-MO**	2CLA620149N6601	1
White Glass	**AM17744-WG**	2CLA620149N3001	1
Black Glass	**AM17744-BG**	2CLA620149N3101	1
	Switch 1-gang, 1-way, DP premium 45A, large size Rated voltage: 250Vac Rated current: 45A Status indicator LED Premium size rocker For 6x3 inch. boxes		
Stainless Steel	**AM17844-ST**	2CLA620169N1101	1
Silk Black	**AM17844-SB**	2CLA620169N1501	1
Antique Gold	**AM17844-AG**	2CLA620169N1601	1
Matt Gold	**AM17844-MG**	2CLA620169N1701	1
Dune Sand	**AM17844-DU**	2CLA620169N6201	1
Mocha Brown	**AM17844-MO**	2CLA620169N6601	1
White Glass	**AM17844-WG**	2CLA620169N3001	1
Black Glass	**AM17844-BG**	2CLA620169N3101	1

1 Gang push buttons - Premium rocker

	Push-button 1-gang, 1-way, SP premium 10A Rated voltage: 250Vac Rated current: 10A Premium size rocker		
Stainless Steel	**AM43044-ST**	2CLA620409N1101	1
	Push-button 1-gang, 1-way, SP premium w/bell symbol 10A Rated voltage: 250Vac Rated current: 10A Bell symbol indicator LED Premium size rocker		
Stainless Steel	**AM42944-ST**	2CLA620449N1101	1

* Silk Black is not suitable for outdoors installation.

Millenium - Complete sets (AM)

2 Gang switches

Product	Article-No.	Order-No.	Pack/Qty
	Switch 2-gang, 1-way, SP 10AX Rated voltage: 250Vac Rated current: 2 x 10AX		
Stainless Steel	**AM10244-ST**	2CLA621109N1101	1
	**Switch 2-gang, 2-way, SP 10AX** Rated voltage: 250Vac Rated current: 2 x 10AX		
Stainless Steel	**AM10644-ST**	2CLA622209N1101	1
	Switch 2-gang, 1-way, SP 20AX Rated voltage: 250Vac Rated current: 2 x 20AX		
Stainless Steel	**AM11444-ST**	2CLA621119N1101	1
	Switch 2-gang, 2-way, SP 20AX Rated voltage: 250Vac Rated current: 2 x 20AX		
Stainless Steel	**AM11644-ST**	2CLA622219N1101	1

3 Gang switches

Product	Article-No.	Order-No.	Pack/Qty
	**Switch 3-gang, 2-way, SP 10AX** Rated voltage: 250Vac Rated current: 10AX Total		
Stainless Steel	**AM10753-ST**	2CLA630209N1101	1
	**Switch 3-gang, 2-way, SP 16AX** Rated voltage: 250Vac Rated current: 16AX Total		
Stainless Steel	**AM12153-ST**	2CLA630219N1101	1
	Push-button 3-gang, 1-way, SP 10AX Rated voltage: 250Vac Rated current: 10AX Total		
Stainless Steel	**AM43053-ST**	2CLA630409N1101	1

4 Gang switches

	Switch 4-gang, 2-way, SP 10AX Rated voltage: 250Vac Rated current: 4 x 10AX		
Stainless Steel	**AM19188-ST**	2CLA640209N1101	1
	Switch 4-gang, 2-way, SP 20AX Rated voltage: 250Vac Rated current: 4 x 20AX		
Stainless Steel	**AM19588-ST**	2CLA640219N1101	1

Other

	Fan isolator 3 poles 10A Rated voltage: 250Vac Rated current: 10A Premium size rocker		
Stainless Steel	**AM13444-ST**	2CLA620509N1101	1

Millenium - Complete sets (AM)

Socket outlets

Product	Article-No.	Order-No.	Pack/Qty
	BS SP switched socket outlet 13A Rated voltage: 250Vac Rated current: 13A Single pole switched Dual earth with child safety shutter system		
Stainless Steel	**AM23386-ST**	2CLA623739N1101	1
Silk Black	**AM23386-SB**	2CLA623739N1501	1
Antique Gold	**AM23386-AG**	2CLA623739N1601	1
Matt Gold	**AM23386-MG**	2CLA623739N1701	1
Dune Sand	**AM23386-DU**	2CLA623739N6201	1
Mocha Brown	**AM23386-MO**	2CLA623739N6601	1
White Glass	**AM23386-WG**	2CLA623739N3001	1
Black Glass	**AM23386-BG**	2CLA623739N3101	1
	BS SP switched socket outlet w/LED 13A Rated voltage: 250Vac Rated current: 13A Single pole switched Indicator LED Dual earth with child safety shutter system		
Stainless Steel	**AM23486-ST**	2CLA623749N1101	1
Silk Black	**AM23486-SB**	2CLA623749N1501	1
Antique Gold	**AM23486-AG**	2CLA623749N1601	1
Matt Gold	**AM23486-MG**	2CLA623749N1701	1
Dune Sand	**AM23486-DU**	2CLA623749N6201	1
Mocha Brown	**AM23486-MO**	2CLA623749N6601	1
White Glass	**AM23486-WG**	2CLA623749N3001	1
Black Glass	**AM23486-BG**	2CLA623749N3101	1

Product	Article-No.	Order-No.	Pack/Qty
	BS DP switched socket outlet 13A Rated voltage: 250Vac Rated current: 13A Double pole switched Dual earth with child safety shutter system		
Stainless Steel	**AM23786-ST**	2CLA623719N1101	1
Silk Black	**AM23786-SB**	2CLA623719N1501	1
Antique Gold	**AM23786-AG**	2CLA623719N1601	1
Matt Gold	**AM23786-MG**	2CLA623719N1701	1
Dune Sand	**AM23786-DU**	2CLA623719N6201	1
Mocha Brown	**AM23786-MO**	2CLA623719N6601	1
White Glass	**AM23786-WG**	2CLA623719N3001	1
Black Glass	**AM23786-BG**	2CLA623719N3101	1
	BS DP switched socket outlet w/LED 13A Rated voltage: 250Vac Rated current: 13A Double pole switched Indicator LED Dual earth with child safety shutter system		
Stainless Steel	**AM23886-ST**	2CLA623729N1101	1
Silk Black	**AM23886-SB**	2CLA623729N1501	1
Antique Gold	**AM23886-AG**	2CLA623729N1601	1
Matt Gold	**AM23886-MG**	2CLA623729N1701	1
Dune Sand	**AM23886-DU**	2CLA623729N6201	1
Mocha Brown	**AM23886-MO**	2CLA623729N6601	1
White Glass	**AM23886-WG**	2CLA623729N3001	1
Black Glass	**AM23886-BG**	2CLA623729N3101	1

Millenium - Complete sets (AM)

Socket outlets

Product	Article-No.	Order-No.	Pack/Qty
	BS DP switched socket outlet, 2-gang 13A Rated voltage: 250Vac Rated current: 13A Double pole switched Dual earth with child safety shutter system		
Stainless Steel	**AM239147-ST**	2CLA643719N1101	1
Silk Black	**AM239147-SB**	2CLA643719N1501	1
Antique Gold	**AM239147-AG**	2CLA643719N1601	1
Matt Gold	**AM239147-MG**	2CLA643719N1701	1
Dune Sand	**AM239147-DU**	2CLA643719N6201	1
Mocha Brown	**AM239147-MO**	2CLA643719N6601	1
White Glass	**AM239147-WG**	2CLA643719N3001	1
Black Glass	**AM239147-BG**	2CLA643719N3101	1
	BS DP switched SO w/LED, 2-gang 13A Rated voltage: 250Vac Rated current: 13A Double pole switched Indicator LED Dual earth with child safety shutter system		
Stainless Steel	**AM240147-ST**	2CLA643729N1101	1
Silk Black	**AM240147-SB**	2CLA643729N1501	1
Antique Gold	**AM240147-AG**	2CLA643729N1601	1
Matt Gold	**AM240147-MG**	2CLA643729N1701	1
Dune Sand	**AM240147-DU**	2CLA643729N6201	1
Mocha Brown	**AM240147-MO**	2CLA643729N6601	1
White Glass	**AM240147-WG**	2CLA643729N3001	1
Black Glass	**AM240147-BG**	2CLA643729N3101	1

Product	Article-No.	Order-No.	Pack/Qty
	Cooker control unit Rated voltage: 250Vac Main switch: Rated current: 45A Double pole switched Indicator LED Socket outlet: Rated current: 13A Child safety shutter system Indicator LED Flush wall box 45mm		
Stainless Steel	**AM118147-ST**	2CLA643749N1101	1
Silk Black	**AM118147-SB**	2CLA643749N1501	1
Antique Gold	**AM118147-AG**	2CLA643749N1601	1
Matt Gold	**AM118147-MG**	2CLA643749N1701	1
Dune Sand	**AM118147-DU**	2CLA643749N6201	1
Mocha Brown	**AM118147-MO**	2CLA643749N6601	1
White Glass	**AM118147-WG**	2CLA643749N3001	1
Black Glass	**AM118147-BG**	2CLA643749N3101	1

Millenium - Complete sets (AM)

Socket outlets

Product	Article-No.	Order-No.	Pack/Qty
	BS DP round pin switched outlet 5A Rated voltage: 250Vac Rated current: 5A Double pole switch Child safety shutter system		
Stainless Steel	**AM22186-ST**	2CLA623759N1101	1
Silk Black	**AM22186-SB**	2CLA623759N1501	1
Antique Gold	**AM22186-AG**	2CLA623759N1601	1
Matt Gold	**AM22186-MG**	2CLA623759N1701	1
Dune Sand	**AM22186-DU**	2CLA623759N6201	1
Mocha Brown	**AM22186-MO**	2CLA623759N6601	1
White Glass	**AM22186-WG**	2CLA623759N3001	1
Black Glass	**AM22186-BG**	2CLA623759N3101	1
	BS DP round pin switched outlet 15A Rated voltage: 250Vac Rated current: 15A Double pole switch Child safety shutter system		
Stainless Steel	**AM20986-ST**	2CLA623769N1101	1
Silk Black	**AM20986-SB**	2CLA623769N1501	1
Antique Gold	**AM20986-AG**	2CLA623769N1601	1
Matt Gold	**AM20986-MG**	2CLA623769N1701	1
Dune Sand	**AM20986-DU**	2CLA623769N6201	1
Mocha Brown	**AM20986-MO**	2CLA623769N6601	1
White Glass	**AM20986-WG**	2CLA623769N3001	1
Black Glass	**AM20986-BG**	2CLA623769N3101	1

Product	Article-No.	Order-No.	Pack/Qty
	BS DP round pin switched outlet w/LED 15A Rated voltage: 250Vac Rated current: 15A Double pole switch Indicator LED Child safety shutter system		
Stainless Steel	**AM23186-ST**	2CLA623779N1101	1
Silk Black	**AM23186-SB**	2CLA623779N1501	1
Antique Gold	**AM23186-AG**	2CLA623779N1601	1
Matt Gold	**AM23186-MG**	2CLA623779N1701	1
Dune Sand	**AM23186-DU**	2CLA623779N6201	1
Mocha Brown	**AM23186-MO**	2CLA623779N6601	1
White Glass	**AM23186-WG**	2CLA623779N3001	1
Black Glass	**AM23186-BG**	2CLA623779N3101	1
	**Universal switched socket outlet 13A** Rated voltage: 250Vac Rated current: 13A Double pole switch Child safety shutter system		
Stainless Steel	**AM29486-ST**	2CLA623919N1101	1
Silk Black	**AM29486-SB**	2CLA623919N1501	1
Antique Gold	**AM29486-AG**	2CLA623919N1601	1
Matt Gold	**AM29486-MG**	2CLA623919N1701	1
Dune Sand	**AM29486-DU**	2CLA623919N6201	1
Mocha Brown	**AM29486-MO**	2CLA623919N6601	1
White Glass	**AM29486-WG**	2CLA623919N3001	1
Black Glass	**AM29486-BG**	2CLA623919N3101	1

Millenium - Complete sets (AM)

Socket outlets with USB charger

Product	Article-No.	Order-No.	Pack/Qty
	BS Single socket outlet 13A, with USB-Charger Type-C, DP switch Rated voltage: 250 Vac Rated current: 13A Double pole switch USB-C 18 W. with Advanced Charging Includes child safety shutter Includes frame and metal support with twin earth		
Stainless Steel	**AM24286-ST**	2CLA623799N1101	1
Silk Black	**AM24286-SB**	2CLA623799N1501	1
Antique Gold	**AM24286-AG**	2CLA623799N1601	1
Matt Gold	**AM24286-MG**	2CLA623799N1701	1
Dune Sand	**AM24286 DU**	2CLA623799N6201	1
Mocha Brown	**AM24286 MO**	2CLA623799N6601	1
White Glass	**AM24286-WG**	2CLA623799N3001	1
Black Glass	**AM24286-BG**	2CLA623799N3101	1
	BS Double socket outlet 13A, with USB-Charger Type-C+A, DP switch Rated voltage: 250 Vac. Rated current: 13A Double pole switch USB-C 18 W. with Advanced Charging USB-A 18 W. (shared) Includes child safety shutter Includes frame and metal support with twin earth		
Stainless Steel	**AM242147-ST**	2CLA643799N1101	1
Silk Black	**AM242147-SB**	2CLA643799N1501	1
Antique Gold	**AM242147-AG**	2CLA643799N1601	1
Matt Gold	**AM242147-MG**	2CLA643799N1701	1
Dune Sand	**AM242147-DU**	2CLA643799N6201	1
Mocha Brown	**AM242147-MO**	2CLA643799N6601	1
White Glass	**AM242147-WG**	2CLA643799N3001	1
Black Glass	**AM242147-BG**	2CLA643799N3101	1

Millenium - Complete sets (AM)

Fuse Connection Unit

Product	Article-No.	Order-No.	Pack/Qty
	Fuse connection unit w/flex outlet 13A Rated voltage: 230Vac. Rated current: 13A Fuse size: Ø6.3x25mm Fuse breaking capacity: 6kA 264V~ 50Hz Fuse according to BS1362		
Stainless Steel	**AM50653-ST**	2CLA630809N1101	1
Silk Black	**AM50653-SB**	2CLA630809N1501	1
Antique Gold	**AM50653-AG**	2CLA630809N1601	1
Matt Gold	**AM50653-MG**	2CLA630809N1701	1
Dune Sand	**AM50653-DU**	2CLA630809N6201	1
Mocha Brown	**AM50653-MO**	2CLA630809N6601	1
White Glass	**AM50653-WG**	2CLA630809N3001	1
Black Glass	**AM50653-BG**	2CLA630809N3101	1
	Fuse connection unit w/flex outlet w/LED 13A Rated voltage: 230Vac. Rated current: 13A Fuse size: Ø6.3x25mm Fuse breaking capacity: 6kA 264V~ 50Hz Fuse according to BS1362. Status indicator LED		
Stainless Steel	**AM50853-ST**	2CLA630859N1101	1
Silk Black	**AM50853-SB**	2CLA630859N1501	1
Antique Gold	**AM50853-AG**	2CLA630859N1601	1
Matt Gold	**AM50853-MG**	2CLA630859N1701	1
Dune Sand	**AM50853-DU**	2CLA630859N6201	1
Mocha Brown	**AM50853-MO**	2CLA630859N6601	1
White Glass	**AM50853-WG**	2CLA630859N3001	1
Black Glass	**AM50853-BG**	2CLA630859N3101	1
	Switched fuse connection unit w/flex outlet w/LED 13A Rated voltage: 230Vac. Rated current: 13A Fuse size: Ø6.3x25mm Fuse breaking capacity: 6kA 264V~ 50Hz Fuse according to BS1362. Status indicator LED		
Stainless Steel	**AM50753-ST**	2CLA630829N1101	1
Silk Black	**AM50753-SB**	2CLA630829N1501	1
Antique Gold	**AM50753-AG**	2CLA630829N1601	1
Matt Gold	**AM50753-MG**	2CLA630829N1701	1
Dune Sand	**AM50753-DU**	2CLA630829N6201	1
Mocha Brown	**AM50753-MO**	2CLA630829N6601	1
White Glass	**AM50753-WG**	2CLA630829N3001	1
Black Glass	**AM50753-BG**	2CLA630829N3101	1
	Flex outlet 20A Rated current: 20A		
Stainless Steel	**AM55044-ST**	2CLA620729N1101	1
Silk Black	**AM55044-SB**	2CLA620729N1501	1
Antique Gold	**AM55044-AG**	2CLA620729N1601	1
Matt Gold	**AM55044-MG**	2CLA620729N1701	1
Dune Sand	**AM55044-DU**	2CLA620729N6201	1
Mocha Brown	**AM55044-MO**	2CLA620729N6601	1
White Glass	**AM55044-WG**	2CLA620729N3001	1
Black Glass	**AM55044-BG**	2CLA620729N3101	1

Millenium - Complete sets (AM)

Flexible Outlets

Product	Article-No.	Order-No.	Pack/Qty
	Flex outlet 45A Rated current: 45A		
Anthracite P	**AM56086-AN**	2CLA620739N1801	1
White	**AM56086-WP**	2CLA620739N2001	1

Dimmers

Product	Article-No.	Order-No.	Pack/Qty
	Double LED/Universal Rotary dimmer Rated voltage: 250Vac / 50-60 Hz Power (min./max load): - LEDi (trailing-edge lamps): 4 / 250 W/VA. - LEDi (leading-edge lamps): 4 / 60 W/VA.* - LV LEDi with transformer type C: 4 / 250 W/VA. - LV LEDi with transformer type LC: 4 / 60 W/VA.* - LV halogen with transformer type C: 4 / 250 W/VA. - LV halogen with transformer type LC: 4 / 250 W/VA. - Incandescent lamps: 4 / 250 W/VA. - Halogen lamps: 4 / 250 W/VA. *Max. 10 lamps.		
Stainless Steel	**AM41144-ST**	2CLA616049N1101	1
Silk Black	**AM41144-SB**	2CLA616049N1501	1
Antique Gold	**AM41144-AG**	2CLA616049N1601	1
Matt Gold	**AM41144-MG**	2CLA616049N1701	1
Dune Sand	**AM41144-DU**	2CLA616049N6201	1
Mocha Brown	**AM41144-MO**	2CLA616049N6601	1
White Glass	**AM41144-WG**	2CLA616049N3001	1
Black Glass	**AM41144-BG**	2CLA616049N3101	1
	Rotary dimmer Rated voltage: 250V~ +/-10 50 Hz. Min. power: 40W / VA. Max. power: - Incandescent lamps: 400W. - Halogen lamps with ferromagnetic transformers: 300 VA. Operating temperature: 0° C to +30° C.		
Stainless Steel	**AM41344-ST**	2CLA626039N1101	1
Silk Black	**AM41344-SB**	2CLA626039N1501	1
Antique Gold	**AM41344-AG**	2CLA626039N1601	1
Matt Gold	**AM41344-MG**	2CLA626039N1701	1
Dune Sand	**AM41344-DU**	2CLA626039N6201	1
Mocha Brown	**AM41344-MO**	2CLA626039N6601	1
White Glass	**AM41344-WG**	2CLA626039N3001	1
Black Glass	**AM41344-BG**	2CLA626039N3101	1

For more functions such as TV or data outlets, please see Modular system catalogue pages.

Millenium - Complete sets (AM)

Hotel equipment

Product	Article-No.	Order-No.	Pack/Qty
	Push button, DND/MUR with bell symbol 10A Rated voltage: 250Vac Rated current 10A Red LED: “Do Not Disturb” Green LED: “Make Up Room” Premium size rocker		
Stainless Steel	**AM40344-ST**	2CLA621589N1101	1
	Switch 2-gang, DND/MUR 10AX Rated voltage: 250Vac Rated current 10AX Red LED: “Do Not Disturb” Green LED: “Make Up Room” LED signaling		
Stainless Steel	**AM40444-ST**	2CLA621509N1101	1
	**Switch blind control** Rated voltage 250Vac Rated current 16AX Output: 2 normally open contact Multi-way input terminal (up/down)		
Stainless Steel	**AM11844-ST**	2CLA624419N1101	1
	Shaver socket outlet Rated voltage: 20VA / 230Vac Outputs: 115V and 230V Dimensions: 150x90x54mm Flush wall box not included (45mm depth minimum)		
Stainless Steel	**AM40188-ST**	2CLA680309N1101	1
Silk Black	**AM40188-SB**	2CLA680309N1501	1
Antique Gold	**AM40188-AG**	2CLA680309N1601	1
Matt Gold	**AM40188-MG**	2CLA680309N1701	1
Dune Sand	**AM40188-DU**	2CLA680309N6201	1
Mocha Brown	**AM40188-MO**	2CLA680309N6601	1
White Glass	**AM40188-WG**	2CLA680309N3001	1
Black Glass	**AM40188-BG**	2CLA680309N3101	1
	Flush mounting box For shaver socket outlet AM40188-XX Dimensions: 135,5 x 74 x 50 mm“		
	803.2	2CLA080320A1001	1

Product	Article-No.	Order-No.	Pack/Qty
	Electronic card switch 16AX Rated voltage: 250Vac Rated current: 16AX Includes indication LED Time relay : 5-90 sec. Cards up to 54 mm width.		
Stainless Steel	**AM40544-ST**	2CLA621459N1101	1
Silk Black	**AM40544-SB**	2CLA621459N1501	1
Antique Gold	**AM40544-AG**	2CLA621459N1601	1
Matt Gold	**AM40544-MG**	2CLA621459N1701	1
Dune Sand	**AM40544-DU**	2CLA621459N6201	1
Mocha Brown	**AM40544-MO**	2CLA621459N6601	1
White Glass	**AM40544-WG**	2CLA621459N3001	1
Black Glass	**AM40544-BG**	2CLA621459N3101	1
	Card switch 16AX Rated voltage: 250Vac Rated current: 16AX Includes indication LED		
Stainless Steel	**AM40244-ST**	2CLA621419N1101	1
Silk Black	**AM40244-SB**	2CLA621419N1501	1
Antique Gold	**AM40244-AG**	2CLA621419N1601	1
Matt Gold	**AM40244-MG**	2CLA621419N1701	1
Dune Sand	**AM40244-DU**	2CLA621419N6201	1
Mocha Brown	**AM40244-MO**	2CLA621419N6601	1
White Glass	**AM40244-WG**	2CLA621419N3001	1
Black Glass	**AM40244-BG**	2CLA621419N3101	1
	Spare Led for card switches Rated voltage: 250Vac Rated current: 0.7mA Frontal replacement.		
	AM50093-BL	2CLA619309N1001	1

Millenium - Modular System (AMD)

The modular system of Millenium (AMD) is a clever solution to allow users to combine different functions, frames and colors.

The functions can be combined with specific frames in order to complete the installation.

The table showing the full set of frames can be found at the end of the chapter.

— Mounting Plate

— Premium rocker switch

— Frame

Standard rocker switch

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, SP 10AX Rated voltage: 250Vac Rated current: 10AX		
Stainless Steel	**AMD10120-ST**	2CLA610100N1101	10
Silk Black	**AMD10120-SB**	2CLA610100N1501	10
Antique Gold	**AMD10120-AG**	2CLA610100N1601	10
Matt Gold	**AMD10120-MG**	2CLA610100N1701	10
Dune Sand	**AMD10120-DU**	2CLA610100N6201	10
Mocha Brown	**AMD10120-MO**	2CLA610100N6601	10
White Glass	**AMD10120-WG**	2CLA610100N3001	10
Black Glass	**AMD10120-BG**	2CLA610100N3101	10
	Switch 1-gang, 2-way, SP 10AX Rated voltage: 250Vac Rated current: 10AX		
Stainless Steel	**AMD10520-ST**	2CLA610200N1101	10
Silk Black	**AMD10520-SB**	2CLA610200N1501	10
Antique Gold	**AMD10520-AG**	2CLA610200N1601	10
Matt Gold	**AMD10520-MG**	2CLA610200N1701	10
Dune Sand	**AMD10520-DU**	2CLA610200N6201	10
Mocha Brown	**AMD10520-MO**	2CLA610200N6601	10
White Glass	**AMD10520-WG**	2CLA610200N3001	5
Black Glass	**AMD10520-BG**	2CLA610200N3101	5

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, intermediate, SP 10AX Rated voltage: 250Vac Rated current: 10AX		
Stainless Steel	**AMD11920-ST**	2CLA611000N1101	10
Silk Black	**AMD11920-SB**	2CLA611000N1501	10
Antique Gold	**AMD11920-AG**	2CLA611000N1601	10
Matt Gold	**AMD11920-MG**	2CLA611000N1701	10
Dune Sand	**AMD11920-DU**	2CLA611000N6201	10
Mocha Brown	**AMD11920-MO**	2CLA611000N6601	10
White Glass	**AMD11920-WG**	2CLA611000N3001	5
Black Glass	**AMD11920-BG**	2CLA611000N3101	5
	Switch 1-gang, 1-way, SP 20AX Rated voltage: 250Vac Rated current: 20AX		
Stainless Steel	**AMD11020-ST**	2CLA610110N1101	10
Silk Black	**AMD11020-SB**	2CLA610110N1501	10
Antique Gold	**AMD11020-AG**	2CLA610110N1601	10
Matt Gold	**AMD11020-MG**	2CLA610110N1701	10
Dune Sand	**AMD11020-DU**	2CLA610110N6201	10
Mocha Brown	**AMD11020-MO**	2CLA610110N6601	10
White Glass	**AMD11020-WG**	2CLA610110N3001	10
Black Glass	**AMD11020-BG**	2CLA610110N3101	10

Millenium - Modular System (AMD)

Standard rocker switch and push buttons

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 2-way, SP 20AX Rated voltage: 250Vac Rated current: 20AX		
Stainless Steel	**AMD11520-ST**	2CLA610210N1101	10
Silk Black	**AMD11520-SB**	2CLA610210N1501	10
Antique Gold	**AMD11520-AG**	2CLA610210N1601	10
Matt Gold	**AMD11520-MG**	2CLA610210N1701	10
Dune Sand	**AMD11520-DU**	2CLA610210N6201	10
Mocha Brown	**AMD11520-MO**	2CLA610210N6601	10
White Glass	**AMD11520-WG**	2CLA610210N3001	5
Black Glass	**AMD11520-BG**	2CLA610210N3101	5
	Switch 1-gang, 1-way, DP 20AX Rated voltage: 250Vac Rated current: 20AX Status indicator LED		
Stainless Steel	**AMD11120-ST**	2CLA610130N1101	10
Silk Black	**AMD11120-SB**	2CLA610130N1501	10
Antique Gold	**AMD11120-AG**	2CLA610130N1601	10
Matt Gold	**AMD11120-MG**	2CLA610130N1701	10
Dune Sand	**AMD11120-DU**	2CLA610130N6201	10
Mocha Brown	**AMD11120-MO**	2CLA610130N6601	10
White Glass	**AMD11120-WG**	2CLA610130N3001	5
Black Glass	**AMD11120-BG**	2CLA610130N3101	5
	Switch 1-gang, 1-way, DP water heater 20AX Rated voltage: 250Vac Rated current: 20AX Water heater indicator LED		
Stainless Steel	**AMD10920-ST**	2CLA610140N1101	10
Silk Black	**AMD10920-SB**	2CLA610140N1501	10
Antique Gold	**AMD10920-AG**	2CLA610140N1601	10
Matt Gold	**AMD10920-MG**	2CLA610140N1701	10
Dune Sand	**AMD10920-DU**	2CLA610140N6201	10
Mocha Brown	**AMD10920-MO**	2CLA610140N6601	10
White Glass	**AMD10920-WG**	2CLA610140N3001	5
Black Glass	**AMD10920-BG**	2CLA610140N3101	5

Product	Article-No.	Order-No.	Pack/Qty
	Push-button 1-gang, 1-way, SP 10A Rated voltage: 250Vac Rated current: 10A		
Stainless Steel	**AMD43020-ST**	2CLA610400N1101	10
Silk Black	**AMD43020-SB**	2CLA610400N1501	10
Antique Gold	**AMD43020-AG**	2CLA610400N1601	10
Matt Gold	**AMD43020-MG**	2CLA610400N1701	10
Dune Sand	**AMD43020-DU**	2CLA610400N6201	10
Mocha Brown	**AMD43020-MO**	2CLA610400N6601	10
White Glass	**AMD43020-WG**	2CLA610400N3001	5
Black Glass	**AMD43020-BG**	2CLA610400N3101	5
	Push-button 1-gang, 1-way, SP with bell symbol 10A Rated voltage: 250Vac Rated current: 10A Bell symbol indicator LED		
Stainless Steel	**AMD42920-ST**	2CLA610440N1101	10
Silk Black	**AMD42920-SB**	2CLA610440N1501	10
Antique Gold	**AMD42920-AG**	2CLA610440N1601	10
Matt Gold	**AMD42920-MG**	2CLA610440N1701	10
Dune Sand	**AMD42920-DU**	2CLA610440N6201	10
Mocha Brown	**AMD42920-MO**	2CLA610440N6601	10
White Glass	**AMD42920-WG**	2CLA610440N3001	5
Black Glass	**AMD42920-BG**	2CLA610440N3101	5
	For use with: AM11120-XX, AMD11120-XX, AM18120-XX, AMD18120-XX, AM42920-XX, AMD42920-XX, AM42944-XX and AMD42944-XX.		
Key symbol	**AM50100-CH**	2CLA600100N1101	10
Fan symbol	**AM50200-CH**	2CLA600100N1201	10
Wc symbol	**AM50300-CH**	2CLA600100N1301	10
Room service symbol	**AM50400-CH**	2CLA600100N1401	10
Nurse symbol	**AM50500-CH**	2CLA600100N1501	10
Stop symbol	**AM50600-CH**	2CLA600100N1601	10

Millenium - Modular System (AMD)

Premium rocker switch and push buttons

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, SP premium 10AX Rated voltage: 250Vac Rated current: 10AX Premium size rocker		
Stainless Steel	**AMD10144-ST**	2CLA620100N1101	10
Silk Black	**AMD10144-SB**	2CLA620100N1501	10
Antique Gold	**AMD10144-AG**	2CLA620100N1601	10
Matt Gold	**AMD10144-MG**	2CLA620100N1701	10
Dune Sand	**AMD10144-DU**	2CLA620100N6201	10
Mocha Brown	**AMD10144-MO**	2CLA620100N6601	10
White Glass	**AMD10144-WG**	2CLA620100N3001	5
Black Glass	**AMD10144-BG**	2CLA620100N3101	5
	Switch 1-gang, 2-way, SP premium 10AX Rated voltage: 250Vac Rated current: 10AX Premium size rocker		
Stainless Steel	**AMD10544-ST**	2CLA620200N1101	10
Silk Black	**AMD10544-SB**	2CLA620200N1501	10
Antique Gold	**AMD10544-AG**	2CLA620200N1601	10
Matt Gold	**AMD10544-MG**	2CLA620200N1701	10
Dune Sand	**AMD10544-DU**	2CLA620200N6201	10
Mocha Brown	**AMD10544-MO**	2CLA620200N6601	10
White Glass	**AMD10544-WG**	2CLA620200N3001	5
Black Glass	**AMD10544-BG**	2CLA620200N3101	5
	Switch 1-gang, intermediate, SP premium 10AX Rated voltage: 250Vac Rated current: 10AX Premium size rocker		
Stainless Steel	**AMD11944-ST**	2CLA621000N1101	10
Silk Black	**AMD11944-SB**	2CLA621000N1501	10
Antique Gold	**AMD11944-AG**	2CLA621000N1601	10
Matt Gold	**AMD11944-MG**	2CLA621000N1701	10
Dune Sand	**AMD11944-DU**	2CLA621000N6201	10
Mocha Brown	**AMD11944-MO**	2CLA621000N6601	10
White Glass	**AMD11944-WG**	2CLA621000N3001	5
Black Glass	**AMD11944-BG**	2CLA621000N3101	5

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, SP premium 20AX Rated voltage: 250Vac Rated current: 20AX Premium size rocker		
Stainless Steel	**AMD11044-ST**	2CLA620110N1101	10
Silk Black	**AMD11044-SB**	2CLA620110N1501	10
Antique Gold	**AMD11044-AG**	2CLA620110N1601	10
Matt Gold	**AMD11044-MG**	2CLA620110N1701	10
Dune Sand	**AMD11044-DU**	2CLA620110N6201	10
Mocha Brown	**AMD11044-MO**	2CLA620110N6601	10
White Glass	**AMD11044-WG**	2CLA620110N3001	5
Black Glass	**AMD11044-BG**	2CLA620110N3101	5
	Switch 1-gang, 2-way, SP premium 20AX Rated voltage: 250Vac Rated current: 20AX Premium size rocker		
Stainless Steel	**AMD11544-ST**	2CLA620210N1101	10
Silk Black	**AMD11544-SB**	2CLA620210N1501	10
Antique Gold	**AMD11544-AG**	2CLA620210N1601	10
Matt Gold	**AMD11544-MG**	2CLA620210N1701	10
Dune Sand	**AMD11544-DU**	2CLA620210N6201	10
Mocha Brown	**AMD11544-MO**	2CLA620210N6601	10
White Glass	**AMD11544-WG**	2CLA620210N3001	5
Black Glass	**AMD11544-BG**	2CLA620210N3101	5

Millenium - Modular System (AMD)

Premium rocker switch and push buttons

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, DP premium 20AX w/LED Rated voltage: 250Vac Rated current: 20A Status indicator LED Premium size rocker		
Stainless Steel	**AMD11140-ST**	2CLA620130N1101	10
Silk Black	**AMD11140-SB**	2CLA620130N1501	10
Antique Gold	**AMD11140-AG**	2CLA620130N1601	10
Matt Gold	**AMD11140-MG**	2CLA620130N1701	10
Dune Sand	**AMD11140-DU**	2CLA620130N6201	10
Mocha Brown	**AMD11140-MO**	2CLA620130N6601	10
White Glass	**AMD11140-WG**	2CLA620130N3001	5
Black Glass	**AMD11140-BG**	2CLA620130N3101	5
	Switch 1-gang, 1-way, DP premium 32A w/LED Rated voltage: 250Vac Rated current: 32A Status indicator LED Premium size rocker		
Stainless Steel	**AMD11240-ST**	2CLA620180N1101	10
Silk Black	**AMD11240-SB**	2CLA620180N1501	10
Antique Gold	**AMD11240-AG**	2CLA620180N1601	10
Matt Gold	**AMD11240-MG**	2CLA620180N1701	10
Dune Sand	**AMD11240-DU**	2CLA620180N6201	10
Mocha Brown	**AMD11240-MO**	2CLA620180N6601	10
White Glass	**AMD11240-WG**	2CLA620180N3001	5
Black Glass	**AMD11240-BG**	2CLA620180N3101	5
	Fan isolator 3 poles double 10A Rated voltage: 250Vac Rated power: 10A 3 poles		
Stainless Steel	**AMD13444-ST**	2CLA620500N1101	10
Silk Black	**AMD13444-SB**	2CLA620500N1501	10
Antique Gold	**AMD13444-AG**	2CLA620500N1601	10
Matt Gold	**AMD13444-MG**	2CLA620500N1701	10
Dune Sand	**AMD13444-DU**	2CLA620500N6201	10
Mocha Brown	**AMD13444-MO**	2CLA620500N6601	10
White Glass	**AMD13444-WG**	2CLA620500N3001	5
Black Glass	**AMD13444-BG**	2CLA620500N3101	5

Product	Article-No.	Order-No.	Pack/Qty
	Push-button 1-gang, 1-way, SP premium 10A Rated voltage: 250Vac Rated current: 10A Premium size rocker		
Stainless Steel	**AMD43044-ST**	2CLA620400N1101	10
Silk Black	**AMD43044-SB**	2CLA620400N1501	10
Antique Gold	**AMD43044-AG**	2CLA620400N1601	10
Matt Gold	**AMD43044-MG**	2CLA620400N1701	10
Dune Sand	**AMD43044-DU**	2CLA620400N6201	10
Mocha Brown	**AMD43044-MO**	2CLA620400N6601	10
White Glass	**AMD43044-WG**	2CLA620400N3001	5
Black Glass	**AMD43044-BG**	2CLA620400N3101	5
	Push-button 1-gang, 1-way, SP premium 10A w/bell symbol Rated voltage: 250Vac Rated current: 10A Bell symbol indicator LED Premium size rocker		
Stainless Steel	**AMD42944-ST**	2CLA620440N1101	10
Silk Black	**AMD42944-SB**	2CLA620440N1501	10
Antique Gold	**AMD42944-AG**	2CLA620440N1601	10
Matt Gold	**AMD42944-MG**	2CLA620440N1701	10
Dune Sand	**AMD42944-DU**	2CLA620440N6201	10
Mocha Brown	**AMD42944-MO**	2CLA620440N6601	10
White Glass	**AMD42944-WG**	2CLA620440N3001	5
Black Glass	**AMD42944-BG**	2CLA620440N3101	5

Millenium - Modular System (AMD)

Half/double rocker switches and push buttons

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, SP half rocker 10AX Rated voltage: 250Vac Rated current: 10AX Half rocker size		
Stainless Steel	**AMD10222-ST**	2CLA680100N1101	10
Silk Black	**AMD10222-SB**	2CLA680100N1501	10
Antique Gold	**AMD10222-AG**	2CLA680100N1601	10
Matt Gold	**AMD10222-MG**	2CLA680100N1701	10
Dune Sand	**AMD10222-DU**	2CLA680100N6201	10
Mocha Brown	**AMD10222-MO**	2CLA680100N6601	10
White Glass	**AMD10222-WG**	2CLA680100N3001	5
Black Glass	**AMD10222-BG**	2CLA680100N3101	5
	Switch 1-gang, 2-way, SP half rocker 10AX Rated voltage: 250Vac Rated current: 10AX Half rocker size		
Stainless Steel	**AMD10622-ST**	2CLA680200N1101	10
Silk Black	**AMD10622-SB**	2CLA680200N1501	10
Antique Gold	**AMD10622-AG**	2CLA680200N1601	10
Matt Gold	**AMD10622-MG**	2CLA680200N1701	10
Dune Sand	**AMD10622-DU**	2CLA680200N6201	10
Mocha Brown	**AMD10622-MO**	2CLA680200N6601	10
White Glass	**AMD10622-WG**	2CLA680200N3001	5
Black Glass	**AMD10622-BG**	2CLA680200N3101	5
	Switch 1-gang, intermediate, SP half rocker 10AX Rated voltage: 250Vac Rated current: 10AX Half rocker size		
Stainless Steel	**AMD12922-ST**	2CLA681000N1101	10
Silk Black	**AMD12922-SB**	2CLA681000N1501	10
Antique Gold	**AMD12922-AG**	2CLA681000N1601	10
Matt Gold	**AMD12922-MG**	2CLA681000N1701	10
Dune Sand	**AMD12922-DU**	2CLA681000N6201	10
Mocha Brown	**AMD12922-MO**	2CLA681000N6601	10
White Glass	**AMD12922-WG**	2CLA681000N3001	5
Black Glass	**AMD12922-BG**	2CLA681000N3101	5

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, SP half rocker 20AX Rated voltage: 250Vac Rated current: 20AX Half rocker size		
Stainless Steel	**AMD11422-ST**	2CLA680110N1101	10
Silk Black	**AMD11422-SB**	2CLA680110N1501	10
Antique Gold	**AMD11422-AG**	2CLA680110N1601	10
Matt Gold	**AMD11422-MG**	2CLA680110N1701	10
Dune Sand	**AMD11422-DU**	2CLA680110N6201	10
Mocha Brown	**AMD11422-MO**	2CLA680110N6601	10
White Glass	**AMD11422-WG**	2CLA680110N3001	5
Black Glass	**AMD11422-BG**	2CLA680110N3101	5
	Switch 1-gang, 2-way, SP half rocker 20AX Rated voltage: 250Vac Rated current: 20AX Half rocker size		
Stainless Steel	**AMD11622-ST**	2CLA680210N1101	10
Silk Black	**AMD11622-SB**	2CLA680210N1501	10
Antique Gold	**AMD11622-AG**	2CLA680210N1601	10
Matt Gold	**AMD11622-MG**	2CLA680210N1701	10
Dune Sand	**AMD11622-DU**	2CLA680210N6201	10
Mocha Brown	**AMD11622-MO**	2CLA680210N6601	10
White Glass	**AMD11622-WG**	2CLA680210N3001	5
Black Glass	**AMD11622-BG**	2CLA680210N3101	5

Millenium - Modular System (AMD)

Half/double rocker switches and push buttons

Product	Article-No.	Order-No.	Pack/Qty
	Switch 1-gang, 1-way, DP half rocker 20AX w/LED, Left-side Rated voltage: 250Vac Rated current: 20A Status indicator LED Half rocker size – Left-side rocker		
Stainless Steel	**AMD11722-ST**	2CLA680220N1101	10
Silk Black	**AMD11722-SB**	2CLA680220N1501	10
Antique Gold	**AMD11722-AG**	2CLA680220N1601	10
Matt Gold	**AMD11722-MG**	2CLA680220N1701	10
Dune Sand	**AMD11722-DU**	2CLA680220N6201	10
Mocha Brown	**AMD11722-MO**	2CLA680220N6601	10
White Glass	**AMD11722-WG**	2CLA680220N3001	5
Black Glass	**AMD11722-BG**	2CLA680220N3101	5
	Switch 1-gang, 1-way, DP half rocker 20AX w/LED, Right-side Rated voltage: 250Vac Rated current: 20A Status indicator LED Half rocker size – Right-side rocker		
Stainless Steel	**AMD11822-ST**	2CLA680230N1101	10
Silk Black	**AMD11822-SB**	2CLA680230N1501	10
Antique Gold	**AMD11822-AG**	2CLA680230N1601	10
Matt Gold	**AMD11822-MG**	2CLA680230N1701	10
Dune Sand	**AMD11822-DU**	2CLA680230N6201	10
Mocha Brown	**AMD11822-MO**	2CLA680230N6601	10
White Glass	**AMD11822-WG**	2CLA680230N3001	5
Black Glass	**AMD11822-BG**	2CLA680230N3101	5

Product	Article-No.	Order-No.	Pack/Qty
	Push button 1-gang, 1-way, SP half rocker 10A Rated voltage: 250Vac Rated current: 10A Half rocker size		
Stainless Steel	**AMD43222-ST**	2CLA680400N1101	10
Silk Black	**AMD43222-SB**	2CLA680400N1501	10
Antique Gold	**AMD43222-AG**	2CLA680400N1601	10
Matt Gold	**AMD43222-MG**	2CLA680400N1701	10
Dune Sand	**AMD43222-DU**	2CLA680400N6201	10
Mocha Brown	**AMD43222-MO**	2CLA680400N6601	10
White Glass	**AMD43222-WG**	2CLA680400N3001	5
Black Glass	**AMD43222-BG**	2CLA680400N3101	5

Millenium - Modular System (AMD)

Triple rocker switches and push buttons

Product	Article-No.	Order-No.	Pack/Qty
	Switch 3-gang, 2-way, triple rocker 10AX Rated voltage: 250Vac Rated power: 10AX Total		
Stainless Steel	**AMD10753-ST**	2CLA630200N1101	10
Silk Black	**AMD10753-SB**	2CLA630200N1501	10
Antique Gold	**AMD10753-AG**	2CLA630200N1601	10
Matt Gold	**AMD10753-MG**	2CLA630200N1701	10
Dune Sand	**AMD10753-DU**	2CLA630200N6201	10
Mocha Brown	**AMD10753-MO**	2CLA630200N6601	10
White Glass	**AMD10753-WG**	2CLA630200N3001	5
Black Glass	**AMD10753-BG**	2CLA630200N3101	5
	Switch 3-gang, 2-way, triple rocker 16AX Rated voltage: 250Vac Rated power: 16AX Total		
Stainless Steel	**AMD12153-ST**	2CLA630210N1101	10
Silk Black	**AMD12153-SB**	2CLA630210N1501	10
Antique Gold	**AMD12153-AG**	2CLA630210N1601	10
Matt Gold	**AMD12153-MG**	2CLA630210N1701	10
Dune Sand	**AMD12153-DU**	2CLA630210N6201	10
Mocha Brown	**AMD12153-MO**	2CLA630210N6601	10
White Glass	**AMD12153-WG**	2CLA630210N3001	5
Black Glass	**AMD12153-BG**	2CLA630210N3101	5

Product	Article-No.	Order-No.	Pack/Qty
	Push button 3-gang, 1-way, triple rocker 10AX Rated voltage: 250Vac Rated power: 10AX Total		
Stainless Steel	**AMD43053-ST**	2CLA630400N1101	10
Silk Black	**AMD43053-SB**	2CLA630400N1501	10
Antique Gold	**AMD43053-AG**	2CLA630400N1601	10
Matt Gold	**AMD43053-MG**	2CLA630400N1701	10
Dune Sand	**AMD43053-DU**	2CLA630400N6201	10
Mocha Brown	**AMD43053-MO**	2CLA630400N6601	10
White Glass	**AMD43053-WG**	2CLA630400N3001	5
Black Glass	**AMD43053-BG**	2CLA630400N3101	5

Millenium - Modular System (AMD)

Function | Dimmers

Product	Article-No.	Order-No.	Pack/Qty
	Universal rotary dimmer – 1M Rated voltage: 230 Vac ± 10% Frequency: 50-60Hz Power (min./max load): - LEDi (trailing-edge lamps), LV LEDi with transformer type C, LV halogen with transformer (type C or LC) and incandescent and halogen lamps: 4/250 W/VA. - LEDi (leading-edge lamps) and LV LEDi with transformer type LC: 4/60W/VA* * Max. 10 lamps Load selection 2 or 3 wire connection OFF position Electronic back-up fuse and overload protection Ambient temperature: 0° C to +35° C		
Anthracite P.	**N2160.3 AP**	2CLA216030B1001	1
White	**N2160.3 BL**	2CLA216030B1101	1

Product	Article-No.	Order-No.	Pack/Qty
	Universal rotary dimmer – 2M Rated voltage: 230 Vac ± 10% Frequency: 50Hz (250W/VA) / 60Hz (200W/VA) Power (min./max load): - LEDi, dimmable CFL and LV LEDi with transformer (L or LC): 2/100W/VA* - Incandescent and halogen lamps: 10/250W/VA - LV halogen w/transformer (L or LC): 10/250W/VA* * max. 10 lamps 2 wire connection Optional: auxiliary on/off with 2-way switch N2X02 Indicator LED lamp included Electronic back-up fuse and overload protection Ambient temperature 0° C to +35° C		
Anthracite P.	**N2260.3 AP**	2CLA226030B1001	1
White	**N2260.3 BL**	2CLA226030B1101	1
	1-10V rotary dimmer - 2M Rated voltage: 127 - 230 Vac / 50-60Hz Dimmable electronic ballast/driver 1-10V control input. Max. power (max. 6 ballasts per device): 700 VA @ 230 Vac / 350 VA @ 127 Vac Indicator LED lamp included.		
Anthracite P.	**N2260.9 AP**	2CLA226090B1001	1
White	**N2260.9 BL**	2CLA226090B1101	1

Millenium - Modular System (AMD)

Function | Socket outlets

Product	Article-No.	Order-No.	Pack/Qty
	Insert - Modular BS socket outlet Rated voltage: 250 Vac Rated current: 13A Type G: 2P + E Includes child safety shutter Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2237 AP**	2CLA223700B1001	10
White	**N2237 BL**	2CLA223700B1101	10
	Insert - Modular Schuko socket outlet Rated voltage: 250 Vac Rated current: 16A Type F: 2P + E Includes child safety shutter Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2288 AP**	2CLA228800B1001	10
White	**N2288 BL**	2CLA228800B1101	10
	Insert - Modular Universal socket outlet Rated voltage: 250 Vac / 125 Vac Rated current: 16A / 13A Multiple type: 2P + E Includes child safety shutter Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2239 AP**	2CLA223900B1001	10
White	**N2239 BL**	2CLA223900B1101	10
	Insert - Modular Euro-American socket outlet Rated voltage: 250 Vac / 125 Vac Rated current: 16A / 13A Type B+C: 2P / NEMA 5-15R Includes child safety shutter Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2238 AP**	2CLA223800B1001	10
White	**N2238 BL**	2CLA223800B1101	10

Product	Article-No.	Order-No.	Pack/Qty
	Insert - Modular Italian socket outlet Rated voltage: 250 Vac Rated current: 16A Type L: 2P + E / P17/11 Includes child safety shutter Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2133 AP**	2CLA213300B1001	20
White	**N2133 BL**	2CLA213300B1101	20
	Insert - Modular Euro-American socket outlet 22 x 44 Rated voltage: 250 Vac / 125 Vac Rated current: 16A / 15A Type B 2P / NEMA 5-15R Includes child safety shutter Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2138 AP**	2CLA213800B1001	20
White	**N2138 BL**	2CLA213800B1101	20

Millenium - Modular System (AMD)

Function | USB chargers

Product	Article-No.	Order-No.	Pack/Qty
	USB charger Type A+C 18W - 44 x 44 250 Vac / 50-60 Hz USB-C: Max. Power output: 18W Output voltage: 5 ... 9 Vdc. Output current: 3 ... 1.5 A. USB-A: 5 Vdc (max. 2,1 A). USB-A+C simultaneously: 5 Vdc (max .3 A) Charging Protocols: PD 3.0. QC 4.0, QC 3.0, QC 2.0, MFi 2,4A, BC 1.2, Frame AMD5144-XX & AMD5244-XX.		
Anthracite P.	**N2285.1 AP**	2CLA228510B1001	1
White	**N2285.1 BL**	2CLA228510B1101	1
	NEW **USB charger Type A+C 15W - 44 x 44** 250 Vac / 50-60 Hz USB-A: 5 Vdc (max. 2,4 A). USB-C: 5 Vdc (max. 3 A). USB-A+C simultaneously: 5 Vdc (total max .3 A Charging Protocols: USB-C, DFP 5V/3A, MFi 2,4A, BC 1.2, DCP 5V/1,5A Frame AMD5144-XX & AMD5244-XX.		
Anthracite P.	**N2285.4 AP**	2CLA228540B1001	1
White	**N2285.4 BL**	2CLA228540B1101	1

Product	Article-No.	Order-No.	Pack/Qty
	NEW **USB charger Type C+C 30W - 44 x 44** 250 Vac / 50-60 Hz USB-C: Max. Power output: 30W Output voltage: 5 ... 20 Vdc. Output current: 3 ... 1.5 A. USB C+C simultaneously: Max Power output: 15 W Output voltage: 5 Vdc Output current: 2.1 A Charging Protocols: PD 3.0. QC 4.0, QC 3.0, QC 2.0, MFi 2,4A, BC 1.2, Frame AMD5144-XX & AMD5244-XX.		
Anthracite P.	**N2285.5 AP**	2CLA228550B1001	1
White	**N2285.5 BL**	2CLA228550B1101	1
	NEW **USB charger Type A+C 15W - 22 x 44** 250 Vac / 50-60 Hz USB-A: 5 Vdc (max. 2,4 A). USB-C: 5 Vdc (max. 3 A). USB-A+C simultaneously: 5 Vdc (total max .3 A Charging Protocols: USB-C, DFP 5V/3A, MFi 2,4A, BC 1.2, DCP 5V/1,5A Frame AMD5144-XX & AMD5244-XX.		
Anthracite P.	**N2185.4 AP**	2CLA218540B1001	1
White	**N2185.4 BL**	2CLA218540B1101	1

Millenium - Modular System (AMD)

Function I TV/SAT outlets

Product	Article-No.	Order-No.	Pack/Qty
	TV terminal outlet M-type - 22 x44 Single TV outlet - Dead-end M type - 9.52 mm male For 75Ω impedance coaxial cable Avoid small bending radius Frequency range: 5 - 2.400 Mhz Connection loss: 1 dB Isolation: >16 dB Return loss: >7,6 dB DC path (Vdc / mA / Tono): 34 max. / 500 max. / 22kHz-DiSEqC Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2150.7 AP**	2CLA215070B1001	10
White	**N2150.7 BL**	2CLA215070B1101	10
	TV terminal F-type screw-in 22 x 44 Single TV outlet F type - female For 75 Ω impedance coaxial cable Frequency range: 0 - 2.0 Working voltage: 250 VRMS max. 00 Mhz Dielectric withstanding voltage: 500 VRMS min. Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2150 AP**	2CLA215000B1001	10
White	**N2150 BL**	2CLA215000B1101	10
	TV outlet M-type + SAT F-Type dead-end 22 x 44 Single TV outlet - Dead end - TV: M type - 9.52 mm male - SAT: F type - female For 75 Ω impedance coaxial cable Frequency range (TV / SAT): 5 - 862 Mhz / 950 - 2.400 MHz Output loss (TV / SAT): 1dB/1dB Through loss (TV / SAT): 4dB/4dB DC path (Vdc / mA / Tono): 34 max. / 500 max./ 22kHz - DiSEqC. Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2151.7 AP**	2CLA215170B1001	10
White	**N2151.7 BL**	2CLA215170B1101	10

Product	Article-No.	Order-No.	Pack/Qty
	TV terminal M-type 44 x 44 Single TV outlet - Dead-end M type - 9.52 mm. male For 75Ω impedance coaxial cable Avoid small bending radius Frequency range: 5 - 2.400 Mhz Connection loss: 1 dB Isolation: >16 dB Return loss: >7.6 dB DC path (Vdc / mA / Tono): 34 max. / 500 max. / 22kHz- DiSEqC Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2250.7 AP**	2CLA225070B1001	10
White	**N2250.7 BL**	2CLA225070B1101	10
	TV/SAT outlet F-type screw-in 44 x 44 Single TV outlet F type - female For 75 Ω impedance coaxial cable Frequency range: 0 - 2.000 Mhz Working voltage: 250 VRMS max. Dielectric withstanding voltage: 500 VRMS min. Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2250 AP**	2CLA225000B1001	10
White	**N2250 BL**	2CLA225000B1101	10
	TV outlet M-type + SAT F-Type intermediate 22 x 44 Single TV outlet - intermediate - TV: M type - 9.52 mm male - SAT: F type - female For 75 Ω impedance coaxial cable Frequency range (TV / SAT): 5 - 862 Mhz / 950 - 2.400 MHz. Output loss (TV / SAT): 1 dB / 1 dB. DC path (Vdc / mA / Tono): 34 max. / 500 max. / 22kHz - DiSEqC.. Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2151.7 AP**	2CLA215180B1001	10
White	**N2151.7 BL**	2CLA215180B1101	10

Millenium - Modular System (AMD)

Function I Data and telephone outlets

Product	Article-No.	Order-No.	Pack/Qty
	Data outlet RJ45 Cat 6A 22 x 44 8 pole Cat 6A STP Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2118.7 AP**	2CLA211870B1001	10
White	**N2118.7 BL**	2CLA211870B1101	10
	Data outlet RJ45 Cat 6 22 x 44 8 pole Cat 6 UTP Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2118.6 AP**	2CLA211860B1001	10
White	**N2118.6 BL**	2CLA211860B1101	10
	Phone outlet RJ12 22 x 44 RJ12 type connection 6 contacts Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2117.6 AP**	2CLA211760B1001	10
White	**N2117.6 BL**	2CLA211760B1101	10

Product	Article-No.	Order-No.	Pack/Qty
	Data outlet RJ45 Cat 6A 44 x 44 8 pole Cat 6A STP Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2218.7 AP**	2CLA221870B1001	10
White	**N2218.7 BL**	2CLA221870B1101	10
	Data outlet RJ45 Cat 6 44 x 44 8 pole Cat 6 UTP Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2218.6 AP**	2CLA221860B1001	10
White	**N2218.6 BL**	2CLA221860B1101	10
	Phone outlet RJ12 44 x 44 RJ12 type connection 6 contacts Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2217.6 AP**	2CLA221760B1001	10
White	**N2217.6 BL**	2CLA221760B1101	10

Millenium - Modular System (AMD)

Voice data & information connectors

Product	Article-No.	Order-No.	Pack/Qty
	Inclined cover plate with shutter for RJ45 connector 1-gang Cover plate for one data connector housing (refs.: AMD6016, AMD6016.1, AMD6016.2 and AMD6016.3) With labeling area for stickers With shutter Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444		
Anthracite P	**AMD33544-AN**	2CLA621670N1801	5
White	**AMD33544-WP**	2CLA621670N2001	5
	Inclined cover plate with shutter for RJ45 connector 2-gang Cover plate for two data connector housing (refs.: AMD6016, AMD6016.1, AMD6016.2 and AMD6016.3) With labeling area for stickers With shutter Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444		
Anthracite P	**AMD33644-AN**	2CLA621680N1801	5
White	**AMD33644-WP**	2CLA621680N2001	5
	Flat cover plate with shutter for RJ45 connector 1-gang Cover plate for one data connector housing (refs.: AMD6016, AMD6016.1, AMD6016.2 and AMD6016.3) With labeling area for stickers With shutter Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444		
Anthracite P	**AMD33144-AN**	2CLA621630N1801	10
White	**AMD33144-WP**	2CLA621630N2001	10
	Flat cover plate with shutter for RJ45 connector 2-gang Cover plate for two data connector housing (refs.: AMD6016, AMD6016.1, AMD6016.2 and AMD6016.3) With labeling area for stickers With shutter Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444		
Anthracite P	**AMD33244-AN**	2CLA621640N1801	10
White	**AMD33244-WP**	2CLA621640N2001	10

Product	Article-No.	Order-No.	Pack/Qty
	RJ45 Keystone, 3M & AMP system adaptor Combined with cover plates: AMD33144-XX, AMD33244-XX, AMD33544-XX & AMD33644-XX Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444		
	AMD6016	2CLA601600A1001	10
	RJ45 Systimax system adaptor Combined with cover plates: AMD33144-XX, AMD33244-XX, AMD33544-XX & AMD33644-XX Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444		
	AMD6016.1	2CLA601610A1001	10
	RJ45 Panduit system adaptor Combined with cover plates: AMD33144-XX, AMD33244-XX, AMD33544-XX & AMD33644-XX Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444		
	AMD6016.2	2CLA601620A1001	10
	RJ45 R&M system adaptor Combined with cover plates: AMD33144-XX, AMD33244-XX, AMD33544-XX & AMD33644-XX Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444		
	AMD6016.3	2CLA601630A1001	10

Millenium - Modular System (AMD)

Connectors, blank plates and bell function

Product	Article-No.	Order-No.	Pack/Qty
	2RCA connection unit Front: 2x RCA connectors (Red / White) Rear: screw terminals (4 wires) Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**AMD55222-AN**	2CLA615520N1801	1
White	**AMD55222-WP**	2CLA615520N2001	1
	3RCA connection unit Front: 3x RCA connectors (Red / White / Yellow) Rear: screw terminals (6 wires) Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**AMD55322-AN**	2CLA615530N1801	1
White	**AMD55322-WP**	2CLA615530N2001	1
	Mini-Jack connection unit Front: 1x Mini-Jack connector (3,5mm stereo audio jack) Rear: screw terminals (3/4 wires) Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**AMD55422-AN**	2CLA615540N1801	1
White	**AMD55422-WP**	2CLA615540N2001	1
	VGA connection unit Front: 1x VGA connector (DE-15 connector) Rear: screw terminals (15 wires) Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**AMD55522-AN**	2CLA615550N1801	1
White	**AMD55522-WP**	2CLA615550N2001	1
	HDMI connector female Front: 1x HDMI connector (Type A connector) Rear: 1x HDMI connector (Type A connector) fitted at 90º angle Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**AMD55722-AN**	2CLA615570N1801	5
White	**AMD55722-WP**	2CLA615570N2001	1
	USB connector female USB adaptor. No charger Front: 1x USB 2.0 connector (Type A connector) Rear: 1x USB 2.0 connector (Type A connector) fitted at 90º angle Combination with frames: AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**AMD55922-AN**	2CLA615590N1801	1
White	**AMD55922-WP**	2CLA615590N2001	1

Product	Article-No.	Order-No.	Pack/Qty
	Blank cover plate – 1M Flat blank plate Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2100 AP**	2CLA210000B1001	1
White	**N2100 BL**	2CLA210000B1101	1
	Blank cover plate – 2M Flat blank plate Frame AMD5144-XX & AMD5244-XX		
Anthracite P.	**N2200 AP**	2CLA220000B1001	1
White	**N2200 BL**	2CLA220000B1101	1
	Buzzer - 2M Rated voltage: 127-230 Vac ; 50-60 Hz. Rated power: 8 VA. Adjustable tone. Acoustic power at 1 meter with cover plate: 75 dB. Combination with frames AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**AMD19144-AN**	2CLA621900N1801	5
White	**AMD19144-WP**	2CLA621900N2001	5
	Electronic door bell 230Vac - 2M Rated voltage: 230 Vac ; 50-60 Hz. 4 melodies available. Acoustic power at 1 meter with cover plate: 72 dB. Combination with frames AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**AMD24144-AN**	2CLA622400N1801	5
White	**AMD24144-WP**	2CLA622400N2001	5

Millenium - Modular System (AMD)

Function | Hospitality

Product	Article-No.	Order-No.	Pack/Qty
	Push button 2-gang, DND/MUR with bell symbol 10A Rated voltage: 250Vac Rated power: 10A “Do Not Disturb” “Make Up my Room” LED signalling		
Stainless Steel	**AMD40344-ST**	2CLA621580N1101	5
Silk Black	**AMD40344-SB**	2CLA621580N1501	5
Antique Gold	**AMD40344-AG**	2CLA621580N1601	5
Matt Gold	**AMD40344-MG**	2CLA621580N1701	5
Dune Sand	**AMD40344-DU**	2CLA621580N6201	5
Mocha Brown	**AMD40344-MO**	2CLA621580N6601	5
White Glass	**AMD40344-WG**	2CLA621580N3001	5
Black Glass	**AMD40344-BG**	2CLA621580N3101	5
	Switch 2-gang, DND/MUR 10AX Rated voltage: 250Vac Rated power: 10AX “Do Not Disturb” “Make Up my Room” LED signalling		
Stainless Steel	**AMD40444-ST**	2CLA621500N1101	5
Silk Black	**AMD40444-SB**	2CLA621500N1501	5
Antique Gold	**AMD40444-AG**	2CLA621500N1601	5
Matt Gold	**AMD40444-MG**	2CLA621500N1701	5
Dune Sand	**AMD40444-DU**	2CLA621500N6201	5
Mocha Brown	**AMD40444-MO**	2CLA621500N6601	5
White Glass	**AMD40444-WG**	2CLA621500N3001	5
Black Glass	**AMD40444-BG**	2CLA621500N3101	5
	Switch blind control Rated voltage: 250Vac Rated power: 16AX Output: 2 normally open contact Multi-way input terminal (up/down)		
Stainless Steel	**AMD11844-ST**	2CLA624410N1101	10
Silk Black	**AMD11844-SB**	2CLA624410N1501	10
Antique Gold	**AMD11844-AG**	2CLA624410N1601	10
Matt Gold	**AMD11844-MG**	2CLA624410N1701	10
Dune Sand	**AMD11844-DU**	2CLA624410N6201	10
Mocha Brown	**AMD11844-MO**	2CLA624410N6601	10
White Glass	**AMD11844-WG**	2CLA624410N3001	5
Black Glass	**AMD11844-BG**	2CLA624410N3101	5

Product	Article-No.	Order-No.	Pack/Qty
	Card switch 16AX Rated voltage: 250 Vac Rated current: 16AX Max. power: iLED 200W. Includes LED indicator Function size: 44 x 44 mm Frame AMD5144-XX & AMD5244-XX.		
Anthracite P.	**N2214.1 AP**	2CLA221410B1001	10
White	**N2214.1 BL**	2CLA221410B1101	10
	Electronic Card switch 16AX w/timer Rated voltage: 250 Vac Rated current: 16AX Max. power: iLED200W / Traditional: 1600W Includes LED indicator Adjustable time-out: 5-90 seg. Function size: 44 x 44 mm Frame AMD5144-XX & AMD5244-XX.		
Anthracite P.	**N2214.5 AP**	2CLA221450B1001	1
White	**N2214.5 BL**	2CLA221450B1101	1
	Electronic Card switch 16AX w/RFID 250 Vac 50-60 HN. / 16A Rated voltage: 110 .... 230 V AC, ±10 %, RFID card-only option:Yes 4 programming modes: ECO, STANDARD, EXTENDED, CUSTOM Status backlight: Yes Dim-out deactivation: Yes Adjustable time-out: 0-240 seg. Output: 2*NO cotact Electronic relay: Yes Load compatibility (min. / max load): -LEDi: 250 W/VA. -LV LEDi with transformer type C: 4 / 250 W/VA. -LV LEDi with transformer type LC: 4 / 60 W/VA.* -LV halogen with transformer type C: 4 / 250 W/VA. -LV halogen with transformer type LC: 4 / 250 W/VA. -Incandescent lamps: 4 / 250 W/VA. -Halogen lamps: 4 / 250 W / VA. -Blind control (M-type) max. 2 A rame AMD5144-XX & AMD5244-XX.		
Anthracite P.	**N2214.6 AP**	2CLA221460B1001	1
White	**N2214.6 BL**	2CLA221460B1101	1

Millenium - Modular system

Function | Microswitches

Product	Article-No.	Order-No.	Pack/Qty
	Microswitch 1/2 channels - 2M Binary input for SELV systems Rated voltage: 5-24 Vac or Vdc Max. current: 50 mA (per switch) Included: 2 indicator LED lamps Function size: 44 x 44 mm		
White	**N2205.1 BL**	2CLA220510N1101	1
Silver	**N2205.1 PL**	2CLA220510N1301	1
Anthracite	**N2205.1 AN**	2CLA220510N1801	1
Champagne	**N2205.1 CV**	2CLA220510N1901	1
	Microswitch 2/4 channels - 2M Binary input for SELV systems Rated voltage: 5-24 Vac or Vdc Max. current: 50 mA (per switch) Included: 4 indicator LED lamps Function size: 44 x 44 mm		
White	**N2205.2 BL**	2CLA220520N1101	1
Silver	**N2205.2 PL**	2CLA220520N1301	1
Anthracite	**N2205.2 AN**	2CLA220520N1801	1
Champagne	**N2205.2 CV**	2CLA220520N1901	1
	**Microswitch 3/6 channels - 2M** Binary input for SELV systems Rated voltage: 5-24 Vac or Vdc Max. current: 50 mA (per switch) Included: 6 indicator LED lamps Function size: 44 x 44 mm		
White	**N2205.3 BL**	2CLA220530N1101	1
Silver	**N2205.3 PL**	2CLA220530N1301	1
Anthracite	**N2205.3 AN**	2CLA220530N1801	1
Champagne	**N2205.3 CV**	2CLA220530N1901	1

Millenium - Modular system

Function | Room Temperature Controllers

Product	Article-No.	Order-No.	Pack/Qty
	ON/OFF Room Temperature Controller For triggering the ventilation and fan-coil actuators in ON/OFF type installations. Thermostat for fan-coil units in 2 pipes systems. Display elements: LCD showing four operation modes: Cooling/Fan only/Energy saving/Sleep Selected models can use Modbus RS485 protocol. Rated voltage: 110-250 Vac / 50-60 Hz Load capacity: Resistive: 4 A; Inductive: 2 A Output voltage: 230 Vac Temperature sensor: internal NTC Temperature Setting Range 5-35°C (0.5°C sensitivity) Temperature accuracy: +/- 1°C Installation box: 86 x 86 x 47 mm (BS type)		
Standard models:			
White	**BR417**	2TCZ204001R0010	1
Black	**BR417-885**	2TCZ204001R4410	1
Modbus RS485 option models:			
White	**BR432**	2TCZ204003R0010	1
Black	**BR432-885**	2TCZ204003R4410	1

Product	Article-No.	Order-No.	Pack/Qty
	0-10Vdc Modulating Room Temperature Controller For triggering the ventilation and fan-coil actuators in modulating 0-10Vdc valve installations. Thermostat for fan-coil units in 2 pipe systems. Display elements: LCD showing four operation modes: Cooling/Fan only/Energy saving/Sleep Selected models can use Modbus RS485 protocol. Rated voltage: 24 Vac / 50-60 Hz Load capacity: Resistive: 4 A; Inductive: 2 A Output voltage: 0-10 Vdc (valve), 230 Vac (fan) Temperature sensor: internal NTC Temperature Setting Range 5-35°C (0.5°C sensitivity) Temperature accuracy: +/- 1°C Installation box 86 x 86 x 47 mm (BS type)		
Standard models:			
White	**BR483**	2TCZ204002R0010	1
Black	**BR483 -885**	2TCZ204002R4410	1
Modbus RS485 option models:			
White	**BR484**	2TCZ204004R0010	1
Black	**BR484 -885**	2TCZ204004R4410	1

Millenium - Modular System (AMD)

Sound system

Product	Article-No.	Order-No.	Pack/Qty
	Modular sound system, BT receiver with amplifier Rated voltage: 110-230 Vac ± 15%; 50-60 Hz Max. consumption: 7W Stand-by consuption: 0,2W Amplifier power: 2+2 W; <1% distorsion (16 Ω) Speaker impedance: 16 Ω (2+2 W audio) 3 audio inputs: Bluetooth, AUX (front), TV (rear)		
Anthracite P	**AMD68444-AN**	2CLA626840N1801	1
White	**AMD68444-WP**	2CLA626840N2001	1
	FM stereo receiver with RDS Rated voltage: 230 Vac ±15% / 50-60 Hz Max. consumption:100 mA Stand-by consumption with the display illumination at minimum:0.2 W Stand-by consumption ref. AMD68044-AN + AMD68344-AN9368: 0.6 W Maximum output power: 2+2 W; <1% distorsion (16 W) Speaker Impedance: 16 W (2+2 W audio) Combination with frames AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**AMD68044-AN**	2CLA626800N1801	1
White	**AMD68044-WP**	2CLA626800N2001	1
	Input/output , USB & Bluetooth® module Power supply through AUX.: 9 V Bluetooth® v2.1 2.4GHz IEEE 802.15.1 Maximum reach from the module to user's Bluetooth® device: 10 m. Maximum consumption: 175 ~ 200 mA Consumption stand-by: 0.4 W Headphones impedance: 16 ~ 600 Ω (25 + 25 mW audio phones) Combination with frames AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**AMD68344-AN**	2CLA626830N1801	1
White	**AMD68344-WP**	2CLA626830N2001	1
	Remote control unit for 9368.1 Power supply: 230 V~ / 127 V~ ; ±15% ; 50-60 Hz Maximum power consumption ref. 9368.2: 15 mA Stand-by consumption with the display illumination at minimum :0.5 W Stand-by consumption ref. AMD68244-AN + AMD68344-AN: 0.9 W Combination with frames AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**AMD68244-AN**	2CLA626820N1801	1
White	**AMD68244-WP**	2CLA626820N2001	1

Product	Article-No.	Order-No.	Pack/Qty
	Radio/amplifier module for ceiling with Bluetooth® 9368.1 Bluetooth®: 230 V~ / 127 V~; ±15%; 50-60 Hz Maximum reach from the module to user's Bluetooth® device: 10 m. Maximum power consumption: 200 mA Consumption stand-by: 0.3 W Antenna impedance: 75 Ω Maximum power headphone output: 6+6 W; <1% distortion (4 Ω) Minimum impedance of headphones: 4 Ω (6+6 W audio)		
	9368.1	2CLA936810A1002	10
	Loudspeaker 5" Installation in flush box ref. 9399 drilling 17mm or embedded ring ref. 9399.1 drilling 160mm. Max. Power: 6W Impedance: 16 Ω Response frecuency: 70Hz to 10kHz		
	9329.1	2CLA932910A1001	1
	Flush box for loudspeaker 5"		
	9399	2CLA939900A1001	12
	Embedded ring for loudspeaker 5"		
	9399.1	2CLA939910A1001	12
	Styling grid for loudspeaker 5"		
	9399.2	2CLA939920A1001	12

Millenium - Modular System (AMD)

ABB-free@home®

Product	Article-No.	Order-No.	Pack/Qty
	For switching 230 V~ consumers. **With integrated switch actuator.** **Switching function is available also without prior programming (pre-configured).** **Only to be used in combination with ABB-free@home® 1/2-Fold sensor cover plate.** 44 mm. × 44 mm. ×45 mm. Outputs: 1× normally open contact, potential free. Suitable for: ohmic. Rated current: 10 A. Rated power: 2300 W. Suitable for: capacitive. Rated current: 10 AX. Protection class of device: IP 20. Mounting depth: 32 mm.		
	SSA-F-1.1.PB.1	2CKA006220A0232	1
Wireless	**SSA-F-1.1.PB.1-WL**	2CKA006200A0108	1
	For dimming 230 V~ loads. **With integrated universal dimming actuator for controlling different lamps.** **The dimming function is available also without prior programming (pre-configured).** **Only to be used in combination with ABB-free@home® 1/2-Fold sensor cover plate.** 44 mm. × 44 mm. × 45 mm. Outputs: 1× dimming channel. Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformers. Rated power: 10 – 180 W / VA. Suitable for: LEDi and energy-saving bulbs; typical. Rated power: 2 – 80 W / VA. Protection class of device: IP 20. Mounting depth: 32 mm.		
	SDA-F-1.1.PB.1	2CKA006220A0235	1
Wireless	**SDA-F-1.1.PB.1-WL**	2CKA006200A0111	1
	For controlling blind and awning motors. With integrated blind actuator. **Blind function is available also without prior programming (pre-configured).** **Only to be used in combination with ABB-free@home® 1/2-Fold sensor cover plate.** 44 mm. × 44 mm. × 45 mm. Outputs: 1× Change-over contacts/ normally open contact, potential bound. Rated power: 920 VA. Rated current: 4 A. Suitable for: Operating mode blind. Protection class of device: IP 20. Mounting depth: 32 mm.		
	SBA-F-1.1.PB.1	2CKA006220A0237	1
Wireless	**SBA-F-1.1.PB.1-WL**	2CKA006200A0113	1

Product	Article-No.	Order-No.	Pack/Qty
	For sending switching, dimming and blind commands to an ABB-free@home® actuator. **Only to be used in combination with ABB-free@home® 1/2-Fold sensor cover plate.** 44 mm. × 44 mm. × 45 mm. Control: Push buttons up/down. LEDS: Used as orientation light or as switching status. Protection class of device: IP 20. Mounting depth: 9 mm.		
	SU-F-1.0.PB.1	2CKA006220A0222	1
Wireless	**SU-F-1.0.PB.1-WL**	2CKA006200A0106	1
	1/2-Fold sensor cover plate Cover plate ABB-free@home® 1/2-Fold sensor for the SSA-F-1.1.PB.1, SDAF-1.1.PB.1, SBA-F-1.1.PB.1 and SU-F-1.0.PB.1 sensors. Combination with frames AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**SR-2-AMAN**	2CLA622620N1801	5
White	**SR-2-AMWP**	2CLA622620N2001	5
	For switching 230 V~ consumers. **With one integrated switch actuator.** **Switching function is available also without prior programming (pre-configured).** **Only to be used in combination with ABB-free@home® 2/4-Fold sensor cover plate.** 44 mm. × 44 mm. ×45 mm. Outputs: 1× normally open contact, potential free. Suitable for: ohmic. Rated current: 10 A. Rated power: 2300 W. Suitable for: capacitive. Rated current: 10 AX. Protection class of device: IP 20. Mounting depth: 32 mm.		
	SSA-F-2.1.PB.1	2CKA006220A0233	1
Wireless	**SSA-F-2.1.PB.1-WL**	2CKA006200A0109	1
	For switching 230 V~ consumers. **With two integrated switch actuators.** **Switching function is available also without prior programming (pre-configured).** **Only to be used in combination with ABB-free@home® 2/4-Fold sensor cover plate.** 44 mm. × 44 mm. × 45 mm. Outputs: 2× normally open contact, potential free. Suitable for: ohmic. Rated current: 10 A. Rated power: 2300 W. Suitable for: capacitive. Rated current: 10 AX. Protection class of device: IP 20. Mounting depth: 32 mm.		
	SSA-F-2.2.PB.1	2CKA006220A0234	1
Wireless	**SSA-F-2.2.PB.1-WL**	2CKA006200A0110	1

Millenium - Modular System (AMD)

ABB-free@home®

Product	Article-No.	Order-No.	Pack/Qty
	For dimming 230 V~ loads. **With integrated universal dimming actuator for controlling different lamps.** **The dimming function is available also without prior programming (pre-configured).** **Only to be used in combination with ABB-free@home® 2/4-Fold sensor cover plate.** 44 mm. × 44 mm. × 45 mm. Outputs: 1× dimming channel. Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformers. Rated power: 10 – 180 W / VA. Suitable for: LEDi and energy-saving bulbs; typical. Rated power: 2 – 80 W / VA Protection class of device: IP 20. Mounting depth: 32 mm.		
	SDA-F-2.1.PB.1	2CKA006220A0236	1
Wireless	**SDA-F-2.1.PB.1-WL**	2CKA006200A0112	1
	For controlling blind and awning motors. **With integrated blind actuator.** **Blind function is available also without prior programming (pre-configured).** **Only to be used in combination with ABB-free@home® 2/4-Fold sensor cover plate.** 44 mm. × 44 mm. × 45 mm. Outputs: 1× Change-over contacts/ normally open contact, potentialbound. Rated power: 920 VA. Rated current: 4 A. Suitable for: Operating mode blind. Protection class of device: IP 20. Mounting depth: 32 mm.		
	SBA-F-2.1.PB.1	2CKA006220A0238	1
Wireless	**SBA-F-2.1.PB.1-WL**	2CKA006200A0114	1
	For sending switching, dimming and blind commands to an ABB-free@home® actuator. **Only to be used in combination with ABB-free@home® 2/4-Fold sensor cover plate.** 44 mm. × 44 mm. × 45 mm. Control: Push buttons up/down. LEDS: Used as orientation light or as switching status. Protection class of device: IP 20. Mounting depth: 9 mm.		
	SU-F-2.0.PB.1	2CKA006220A0223	1
Wireless	**SU-F-2.0.PB.1-WL**	2CKA006200A0107	1
	2/4-Fold sensor cover plate Cover plate ABB-free@home® 2/4-Fold sensor for the SSA-F-2.1.PB.1, SSA-F-2.2.PB.1, SDA-F-2.1.PB.1, SBA-F-2.1PB.1 and SU-F-2.0.PB.1 sensors. Combination with frames AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**SR-4-AMAN**	2CLA622640N1801	5
White	**SR-4-AMWP**	2CLA622640N2001	5

Product	Article-No.	Order-No.	Pack/Qty
	For controlling the room temperature with thermostat fuctions. Control of conventional actuators or analog actuator (constant regulation) with the HA-M-0.6.1 and HA-M-0.12.1 actuators. **With NOMINAL temperature indication. Only to be used in combination with ABB-free@home® room temperature controller cover plate.** 44 mm. × 44 mm. × 45 mm. Visualization: LCD status mode indicator. Protection class of device: IP 20. Mounting depth: 14 mm.		
	RTC-F-1.PB	2CKA006220A0276	1
Wireless	**RTC-F-1.PB-WL**	2CKA006200A0115	1
	Room temperature controller cover plate. Cover plate ABB-free@home® for RTC-F-1.PB		
Anthracite P	**CP-RTC-AMAN**	2CLA624060N1801	5
White	**CP-RTC-AMWP**	2CLA624060N2001	5
	Watchdog sensor 180° with lens for the detection of animals. For the automatic switching of the ABB-free@home® actuators. **Only to be used in combination with ABB-free@home® Watchdog 180° flush mounted cover plate.** 44 mm. × 44 mm. × 45 mm. Detection range: 6m front, 3m lateral. Angle: 180°. Brightness range: 1-500 Lux. Protection class of device: IP 20. Mounting depth: 9 mm.		
	MSA-F-1.1.PB.1	2CKA006220A0231	1
Wireless	**MSA-F-1.1.PB.1 -WL**	2CKA006200A0117	1
	Watchdog sensor 180 cover plate. Cover plate ABB-free@home® for Watchdog sensor MSA-F-1.1.PB.1. Combination with frames AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
Anthracite P	**CP-MD-AMAN**	2CLA624160N1801	5
White	**CP-MD-AMWP**	2CLA624160N2001	5
	Light symbol button ABB-free@home® Blind symbol button ABB-free@home® Scene symbol button ABB-free@home® Dimmer symbol button ABB-free@home®		
Light Anthracite P	**SBL-AMAN**	2CLA602610N1801	20
Light White	**SBL-AMWP**	2CLA602610N2001	20
Blind Anthracite P	**SBB-AMAN**	2CLA602620N1801	20
Blind White	**SBB-AMWP**	2CLA602620N2001	20
Scene Anthracite P	**SBS-AMAN**	2CLA602630N1801	20
Scene White	**SBS-AMWP**	2CLA602630N2001	20
Dimmer Anthracite P	**SBD-AMAN**	2CLA602640N1801	20
Dimmer White	**SBD-AMWP**	2CLA602640N2001	20

Millenium - Modular System (AMD)

KNX system

Product	Article-No.	Order-No.	Pack/Qty
	2-Fold sensor Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Control element: Switch contacts. Display elements: LED to indicate the function. Protection class (Device): IP 20. Temperature range (Device): -5 °C to 45 °C. Combine with frame AMD5153-XX and AMD5253-XX.		
AMD72053-AN (6125/20-981-500)		2CKA006115A0443	1
AMD72053-WP (6125/20-214-500)		2CKA006115A0500	1
	4-Fold sensor Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Control element: Switch contacts. Display elements: LED to indicate the function. Protection class (Device): IP 20. Temperature range (Device): -5 °C to 45 °C. Combine with frame AMD5153-XX and AMD5253-XX.		
AMD74053-AN (6126/20-981-500)		2CKA006116A0218	1
AMD74053-WP (6126/20-214-500)		2CKA006115A0501	1
	6-Fold sensor Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Control element: Switch contacts. Display elements: LED to indicate the function. Protection class (Device): IP 20. Temperature range (Device): -5 °C to 45 °C. Combine with frame AMD5153-XX and AMD5253-XX.		
AMD76053-AN (6129/20-981-500)		2CKA006118A0104	1
AMD76053-WP (6129/20-214-500)		2CKA006115A0502	1
	6-Fold sensor with IR Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Control element: Switch contacts. Display elements: LED to indicate the function. Protection class (Device): IP 20. Temperature range (Device): -5 °C to 45 °C. Combine with frame AMD5153-XX and AMD5253-XX.		
AMD76153-AN (6129/21-981-500)		2CKA006118A0107	1
AMD76153-WP (6129/21-214-500)		2CKA006134A0355	1
	Watchdog 180° flush mounted Movement sensor with up to four channels. Detection range: frontal: 6 m., lateral: 6 m. Detection angle: 180 °. Brightness limit value: 5 Lux - 150 Lux. Mounting height: 1.1 m. Protection class (Device): IP 20. Temperature range (Device): -5 °C to 45 °C. Combine with frame AMD5153-XX and AMD5253-XX. Position for installation: vertical.		
AMD70153-AN (6122/20-981-500)		2CKA006132A0306	1
AMD70153-WP (6122/20-214-500)		2CKA006132A0424	1

Product	Article-No.	Order-No.	Pack/Qty
	Room thermostat heating/cooling fan coil Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. The controller is a thermostat for fan coil units in 2 - and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Switch contacts for operating mode selection and dial for setpoint or fan speed adjustment. Display elements: LCD showing operation modes. Protection class (Device): IP 20. Temperature range (Device): -5 °C to 45 °C. Combine with frame AMD5153-XX and AMD5253-XX.		
AMD70053-AN (6124/08-981-500)		2CKA006134A0309	1
AMD70053-WP (6124/08-214-500)		2CKA006134A0354	1
	Ceiling light symbol **Blind symbol** **Scene symbol** **Temperature symbol** **Light symbol** **Fan coil symbol** Labelling insert for Millenium control covers 1 /2-gang, 2 / 4-gang, 3 / 6-gang and 3 / 6-gang with infrared		
AM50701-GR (6123/20-500)		2CKA006123A0001	10
AM50702-GR (6123/21-500)		2CKA006123A0002	10
AM50703-GR (6123/22-500)		2CKA006123A0003	10
AM50704-GR (6123/23-500)		2CKA006123A0004	10
AM50705-GR (6123/24-500)		2CKA006123A0005	10
AM50706-GR (6123/26-500)		2CKA006123A0006	10
AM50701-WH (6123/20-214-500)		2CKA006123A0007	10
AM50702-WH (6123/21-214-500)		2CKA006123A0008	10
AM50703-WH (6123/22-214-500)		2CKA006123A0009	10
AM50704-WH (6123/23-214-500)		2CKA006123A0010	10
AM50705-WH (6123/24-214-500)		2CKA006123A0011	10
AM50706-WH (6123/26-214-500)		2CKA006123A0012	10

Millenium - Modular System (AMD)

Access control KNX

Product	Article-No.	Order-No.	Pack/Qty
	Mifare transponder reader 1) Access Control transponder reader able to be completely integrated into every KNX installation. 2) 1 binary input for connecting cardholder 3) 1 output 4A (24 V AC/DC) Required additional power supply (10…32 V DC/ 12…24 V AC) Combination with frames AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
	TR/U 1.1	2CSY235683R2001	1
	Mifare transponder holder Access Control transponder holder able to be completely integrated into every KNX installation. 1) 1 binary input (ON/OFF, dimmer, shutter) 2) 1 output 4A (24 V AC/DC) Required additional power supply (12…24 V AC/DC) Combination with frames AMD5144-XX, AMD5244-XX, AMD5344-XX & AMD5444-XX.		
	TH/U 1.1	2CSY265232R2021	1
	Set of 10 transponder cards The transponder card uses passive transponder technology operating in radio frequency (MIFARE technology), without the need for contact between the reader and the card itself. The transponder card is read by swiping it in front of the reader at a maximum distance of 20 mm (can be reduced according to installation environment).		
	TS/T 1	2CSY259412R2041	1

Product	Article-No.	Order-No.	Pack/Qty
	**Software MiniMAC 4.1** Configuration and supervision software for ABB Access Control system. Main functionalities are: management of keys, room state monitoring. Guest check in/check out, front desk room load monitoring, management of guest and employee databases, front desk management of room climate, …		
	SW MiniMAC 4.1	2CSY258202R2051	1

Millenium - Modular System (AMD)

Frames including metal support

Product	Article-No.	Order-No.	Pack/Qty
	Frame 1-gang – Window 44 x 44 -Single Frame dimensions: 86 x 86 mm Window size: 44 x 44 mm Includes metal support and screws Extra robustness for Premium switches (single function only)		
Stainless Steel	**AMD5044-ST**	2CLA617110N1101	10
Silk Black	**AMD5044-SB**	2CLA617110N1501	10
Antique Gold	**AMD5044-AG**	2CLA617110N1601	10
Matt Gold	**AMD5044-MG**	2CLA617110N1701	10
Dune Sand	**AMD5044-DU**	2CLA617110N6201	10
Mocha Brown	**AMD5044-MO**	2CLA617110N6601	10
White Glass	**AMD5044-WG**	2CLA617110N3001	4
Black Glass	**AMD5044-BG**	2CLA617110N3101	4
	Frame 1-gang – Window 44 x 44 –Multifunction Frame dimensions: 86 x 86 mm Window size: 44 x 44 mm Includes metal support and screws For multiple function configurations		
Stainless Steel	**AMD5144-ST**	2CLA627100N1101	10
Silk Black	**AMD5144-SB**	2CLA627100N1501	10
Antique Gold	**AMD5144-AG**	2CLA627100N1601	10
Matt Gold	**AMD5144-MG**	2CLA627100N1701	10
Dune Sand	**AMD5144-DU**	2CLA627100N6201	10
Mocha Brown	**AMD5144-MO**	2CLA627100N6601	10
White Glass	**AMD5144-WG**	2CLA627100N3001	10
Black Glass	**AMD5144-BG**	2CLA627100N3101	10
	Frame 2-gang – Window 44 x 44 – Multifunction Frame dimensions: 147 x 86 mm Window size: 2*44 x 44 mm Includes metal support and screws For multiple function configurations		
Stainless Steel	**AMD5244-ST**	2CLA647200N1101	10
Silk Black	**AMD5244-SB**	2CLA647200N1501	10
Antique Gold	**AMD5244-AG**	2CLA647200N1601	10
Matt Gold	**AMD5244-MG**	2CLA647200N1701	10
Dune Sand	**AMD5244-DU**	2CLA647200N6201	10
Mocha Brown	**AMD5244-MO**	2CLA647200N6601	10
White Glass	**AMD5244-WG**	2CLA647200N3001	5
Black Glass	**AMD5244-BG**	2CLA647200N3101	5

Product	Article-No.	Order-No.	Pack/Qty
	Frame 3-gang –Window 44 x 44 – Multifunction Frame dimensions: 228 x 86 mm Window size: 3*44 x 44 mm Includes metal support and screws For multiple function configurations Compatible with box model: 1099		
Stainless Steel	**AMD5344-ST**	2CLA667310N1101	5
Silk Black	**AMD5344-SB**	2CLA667310N1501	5
Antique Gold	**AMD5344-AG**	2CLA667310N1601	5
Matt Gold	**AMD5344-MG**	2CLA667310N1701	5
Dune Sand	**AMD5344-DU**	2CLA667310N6201	5
Mocha Brown	**AMD5344-MO**	2CLA667310N6601	5
White Glass	**AMD5344-WG**	2CLA667310N3001	2
Black Glass	**AMD5344-BG**	2CLA667310N3101	2
	Frame 4-gang – Window 44 x 44 – Multifunction Frame dimensions: 293 x 86 mm Window size: 4*44 x 44 mm Includes metal support and screws For multiple function configurations Compatible with box model: 1099		
Stainless Steel	**AMD5444-ST**	2CLA687410N1101	5
Silk Black	**AMD5444-SB**	2CLA687410N1501	5
Antique Gold	**AMD5444-AG**	2CLA687410N1601	5
Matt Gold	**AMD5444-MG**	2CLA687410N1701	5
Dune Sand	**AMD5444-DU**	2CLA687410N6201	5
Mocha Brown	**AMD5444-MO**	2CLA687410N6601	5
White Glass	**AMD5444-WG**	2CLA687410N3001	2
Black Glass	**AMD5444-BG**	2CLA687410N3101	2

Millenium - Modular System (AMD)

Frames including metal support

Product	Article-No.	Order-No.	Pack/Qty
	Frame 1-gang – Window 21 x 32 -Single Frame dimensions: 86 x 86 mm Window size: 21 x 32 mm Includes metal support and screws Extra robustness for Small switches (single function only)		
Stainless Steel	**AMD5120-ST**	2CLA617100N1101	10
Silk Black	**AMD5120-SB**	2CLA617100N1501	10
Antique Gold	**AMD5120-AG**	2CLA617100N1601	10
Matt Gold	**AMD5120-MG**	2CLA617100N1701	10
Dune Sand	**AMD5120-DU**	2CLA617100N6201	10
Mocha Brown	**AMD5120-MO**	2CLA617100N6601	10
White Glass	**AMD5120-WG**	2CLA617100N3001	4
Black Glass	**AMD5120-BG**	2CLA617100N3101	4
	**Frame 1-gang – Window 53 x 44** Frame dimensions: 86 x 86 mm Window size: 53 x 44 mm Includes metal support and screws For Triple rocker switches		
Stainless Steel	**AMD5153-ST**	2CLA637100N1101	10
Silk Black	**AMD5153-SB**	2CLA637100N1501	10
Antique Gold	**AMD5153-AG**	2CLA637100N1601	10
Matt Gold	**AMD5153-MG**	2CLA637100N1701	10
Dune Sand	**AMD5153-DU**	2CLA637100N6201	10
Mocha Brown	**AMD5153-MO**	2CLA637100N6601	10
White Glass	**AMD5153-WG**	2CLA637100N3001	10
Black Glass	**AMD5153-BG**	2CLA637100N3101	10
	Frame 2-gang – Window 53 x 44 Frame dimensions: 147 x 86 mm Window size: 2*53 x 44 mm Includes metal support and screws For Triple rocker switches		
Stainless Steel	**AMD5253-ST**	2CLA667200N1101	10
Silk Black	**AMD5253-SB**	2CLA667200N1501	10
Antique Gold	**AMD5253-AG**	2CLA667200N1601	10
Matt Gold	**AMD5253-MG**	2CLA667200N1701	10
Dune Sand	**AMD5253-DU**	2CLA667200N6201	10
Mocha Brown	**AMD5253-MO**	2CLA667200N6601	10
White Glass	**AMD5253-WG**	2CLA667200N3001	5
Black Glass	**AMD5253-BG**	2CLA667200N3101	5

Zenit British Standard

A global solution for the British Standard market

Zenit is the most comprehensive modular range in ABB's wiring accessories portfolio. Renowned for its design and reliability, Zenit has been featured in residential and commercial buildings across the world. ABB has now added key functions to extend the range to the British Standard market.

Take advantage of years of development and stay up-to-date with the latest technologies. More than 120 functions are ready to cater to every customer need. All this encompassed in a beautiful design and with the guarantee of a brand renowned for its quality such as ABB.

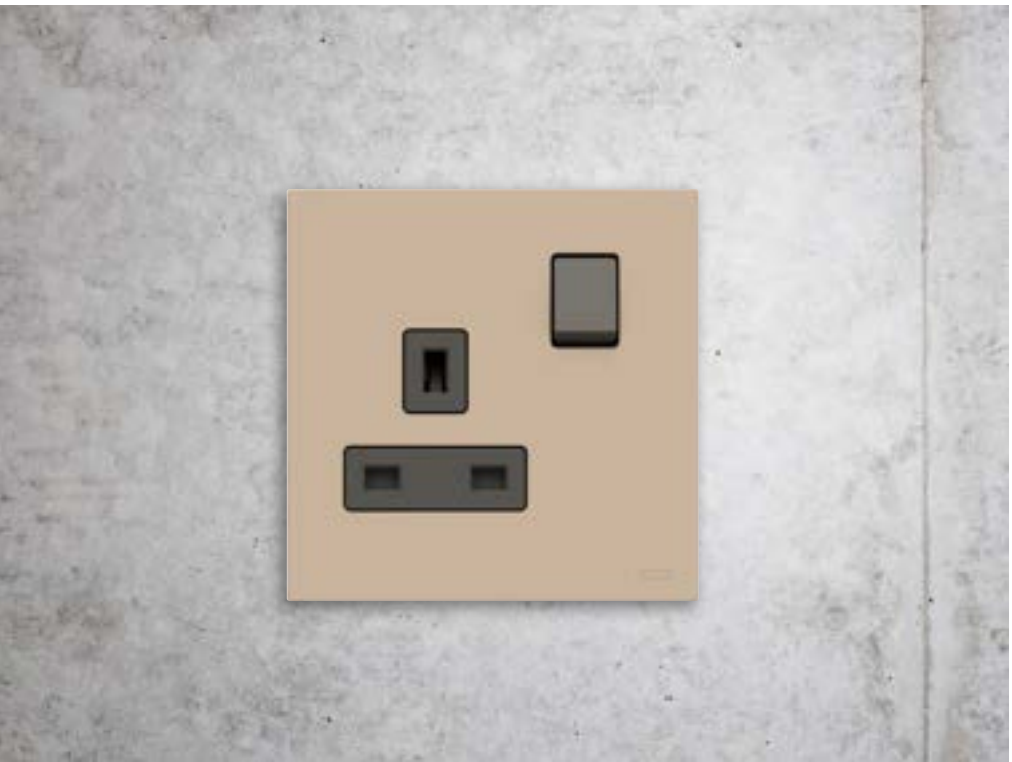

Uncompromised quality
From material selection to the safety features

ABB stands for quality products. Excellence is a top priority throughout the design and manufacturing process. In Zenit, this translates into specific product features that make this range a reliable and safe product for every application.

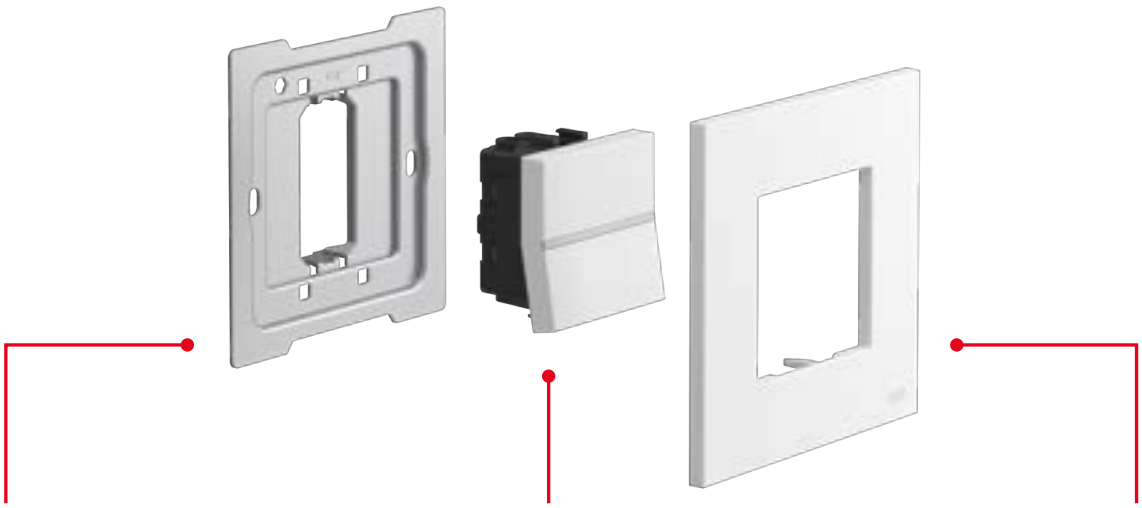

Steel support
for robust fixing

20AX light switch options
for heavy duty installations

High durability
polycarbonate material

Robust materials
Metal supports for the switches and socket outlets guarantee a strong bond to the wall.

A blend of certified (1) ABS and polycarbonate materials is used for the inner functional components.

High durability polycarbonate is used for rockers or frames to produce a wear-proof product with outstanding aesthetics.

Safety first

Products are fitted with safety features

- **All our socket outlets include a double-pole switch** to ensure that power is disconnected from L and N terminals.
- **Safety+ automatic shutters** are integrated in all ZENIT socket outlets.
- **Twin earth terminals** guarantee optimal earthing of sockets and switches

Double Pole switched, by default

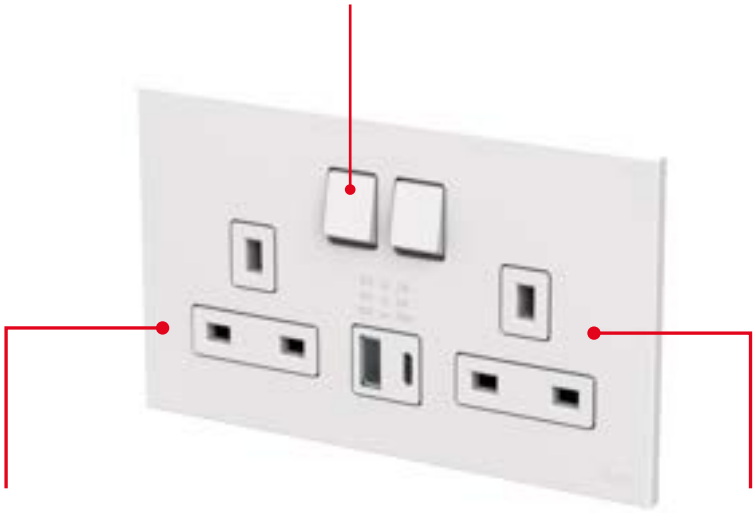

Double screw-in Earth protections

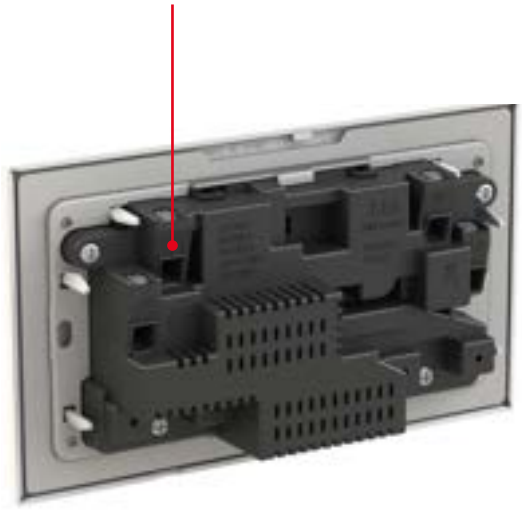

Safety+ automatic shutters in every socket outlet

Advanced USB charging featuring PD and QC protocols

Compliant with latest safety standards (1)

MADE IN EUROPE

Made in Europe
Zenit is made in the ABB wiring accessories factory in Oiartzun (Spain).

GUARANTEE POLICY 10 YEARS

10-year guarantee
ABB's commitment to the quality of our products allow us to offer a 10-year guarantee policy (2).

(1) See page 122 for the full list of standards

(2) 10 years for mechanical switches and socket outlets. 2 years for electronic devices. Terms and conditions apply. See full document at **abb.com**

Thought-out design from ordering to installation and usage

Complete sets vs. Modular system
Zenit functions can be ordered as a **Complete Set** (BL color only) or in a **Modular System** format (all colors). This clever format allows users to combine different functions in a single frame, ordering only what's really required.

Screw connection
The **standard Zenit** switches include steel-made screws. Depending on the rated current, the screws can secure up to 6 mm^2 cables in the same pit-hole.

Screw-less connection
The signature **Niessen® Zenit®** light-switches are equipped with state-of-art automatic connections compatible with pairs of 1.5 and 2.5 mm^2 wires. Installers can **save up to 40% of the installation time** with three simple steps:

1. Strip the cable about 14 mm and introduce it into the terminal.

2. Press the push button and insert the cable.

3. Release the push button and check fixation. To disconnect the cord, press the push button on top again.

Protective cover
Plastic wrapping of cover plates serve a double purpose. They prevent scratches during transportation, and they protect the functions from dust or paint during the works. No need for extra material. Lower cost, less hassle, less installation time, less waste.

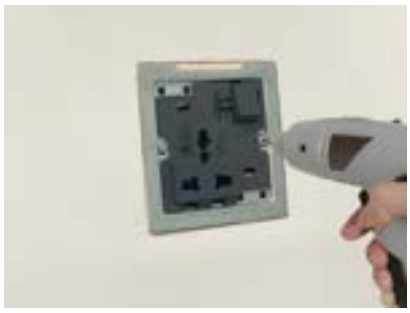

1. Install insert onto the wall.

2. Position the cover with the protective bag.

3. After works are completed, remove plastic and adjust cover plate.

Wallpaper compensation
Frames are fitted with progressive bridles designed to compensate 1-3 mm irregularities on the wall (i.e. plaster or wallpaper defects).

Twin-earth terminals
Special frame options are available including two earth terminals in the mounting frame. This is an easy and quick solution for installations where high amperage devices (i.e.32A, 45A DP switches) require more room to connect high-section earth wires.

Upgrade-friendly
The proprietary modular design of Zenit makes the range future-proof. Need the latest USB Quick Charger? Simply remove the frame and replace the old charger with a new one. No unnecessary purchasing of frames, no waste.

1-click data
Need the user manual?
Simply scan the QR code on the product label or search the order code in ABB.com to access all the product details.

Create your own space
A balanced palette of colors

Zenit is available in four colors: White (BL), Silver (PL), Anthracite Grey (AN) and Champagne (CV). Whether it is a warm living space or a productive office area, the palette of colors will fit the needs of any interior design. Furthermore, functions and frames can be combined freely to create your own design.

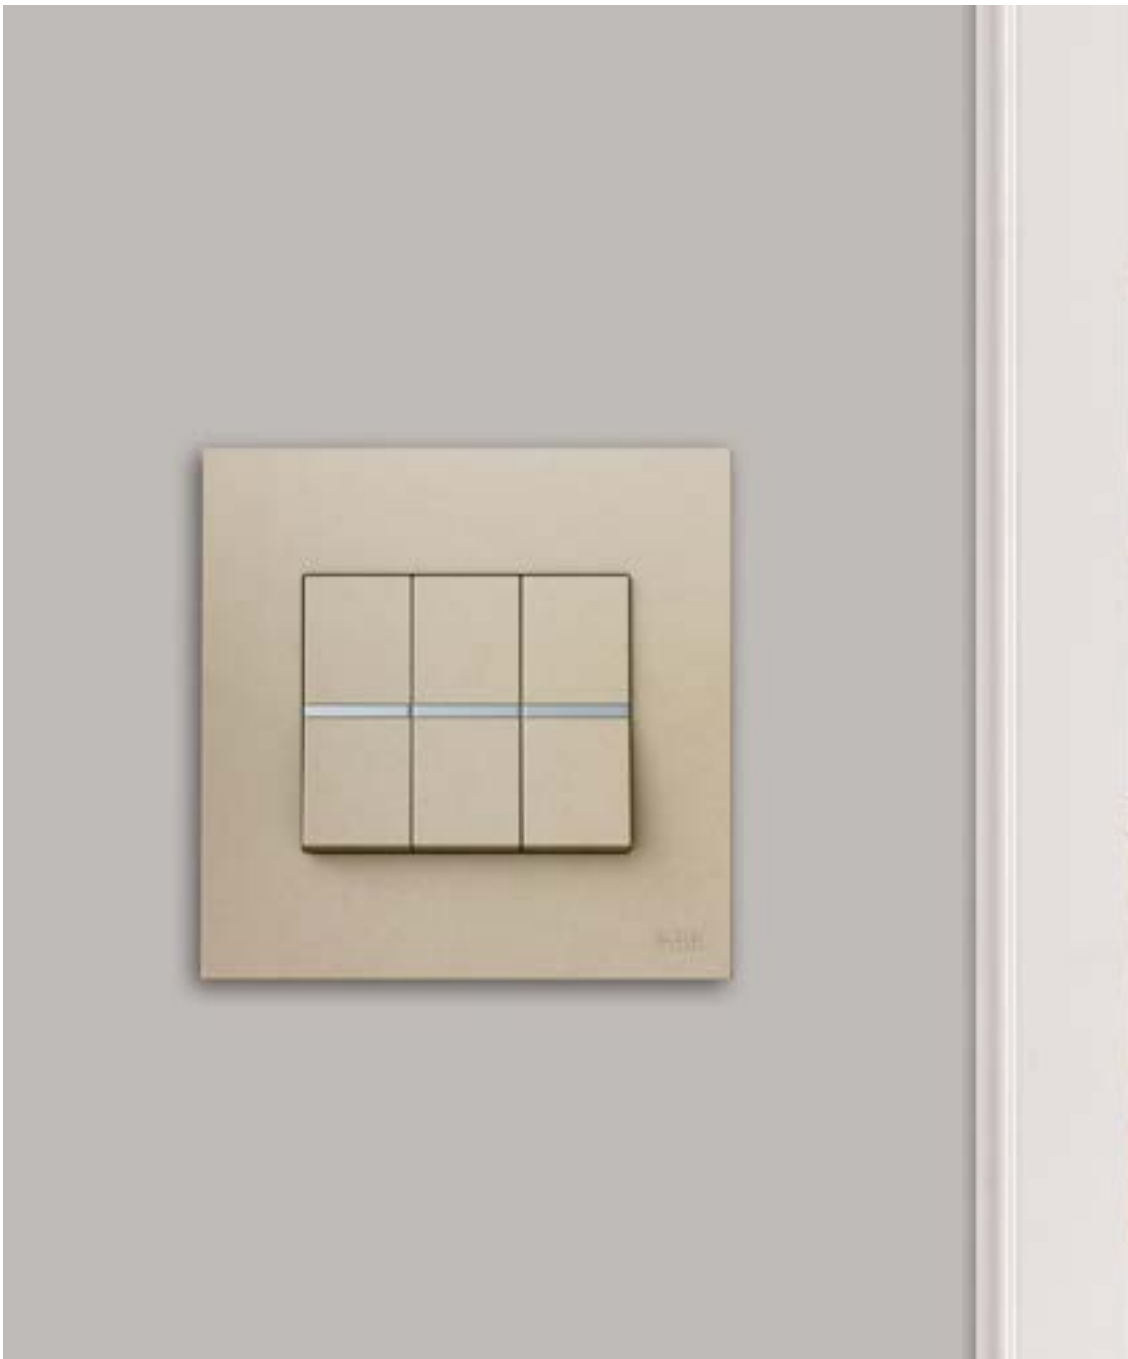

BL - White

PL - Silver

AN - Anthracite

CV - Champagne

Endless possibilities

Combine the functions to fit every need

Switches / Push buttons

Available in 4 colors

White
BL

Silver
PL

Anthracite
AN

Champagne
CV

Functions: Dimmers, VDI outlets, USB-chargers, etc...

Available in 4 colors

White
BL

Silver
PL

Anthracite
AN

Champagne
CV

Frames

Available in 4 colors



White
BL

Silver
PL

Anthracite
AN

Champagne
CV

Socket outlet insert

White
BL

Anthracite Polished
AP

White
BL

Silver
PL

Anthracite
AN

Champagne
CV

01

02



03

04

05

06

07

08

09

10



11

12

01 1-gang switch, small rocker size
02 2-gang switch, small rocker size
03 1-gang switch, premium rocker size
04 3-gang switch, triple rocker size
05 KNX push button
06 Beacon LED light
07 Modular USB charger
08 DND/MUR for hospitality
09 13A, Type-G socket outlet with USB charger
10 13A, Type-G socket outlet
11 Universal socket outlet
12 15A, Type-M socket outlet

One solution for every application

Switch to endless possibilities and discover more than 120 functions ready to meet your needs. The minimalist, modern design features an ultra-slim frame and high-quality material that create an outstanding product.

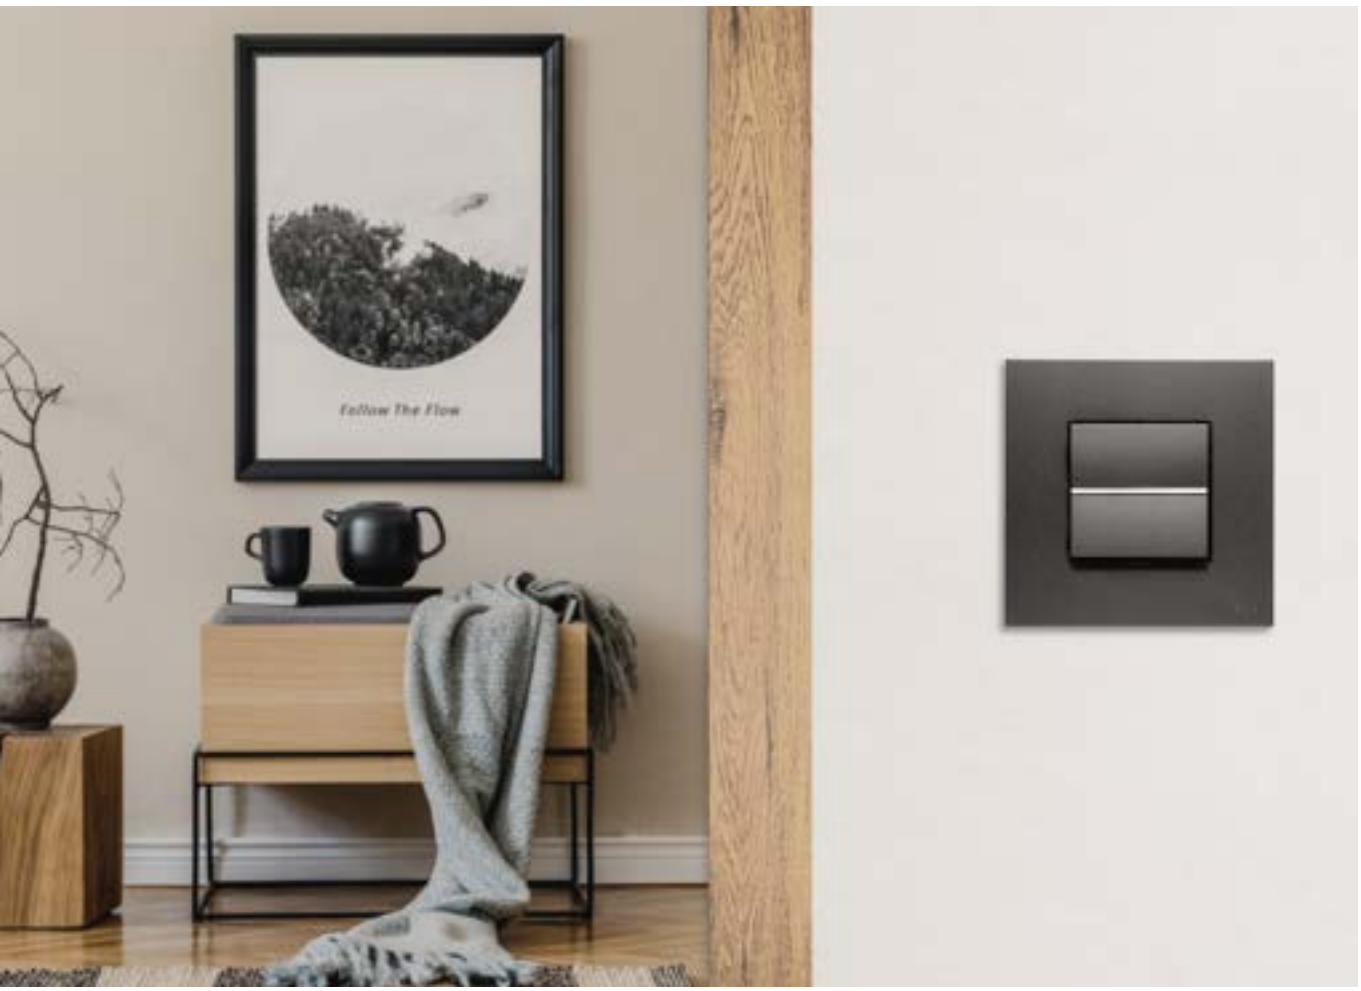

Residential projects
Never has your home been so comfortable, safe, efficient and beautiful. Today's modern living spaces demand comfort in every room, whether it's the bathroom transforming into a wellness spa or kitchens becoming communication islands. Zenit offers solutions for future-oriented lifestyles in residential living environments.

01

Zenit and ABB-free@home®

Making home automation easier than ever. Simply smart. **Zenit and ABB-free@home®** transform any house or apartment into an intelligent home. Whether it's window blinds, lights, heating, air conditioning, door communication or presence detection; the combination of the two ABB systems provide a simple and convenient solution.
Easy to control via a switch on the wall or remotely via your smart device.

02

03

04

05

01 ABB-free@home® smart thermostat
02 2-gang light switch
03 2-gang VDI outlet: HDMI and USB
04 Modular USB charger
05 Bluetooth™ sound system

Zenit British Standard
Complete sets

All articles in this chapter are supplied with all the necessary parts to complete the installation of the functions.

All articles include:
- Functional module (e.g., switch, socket outlet)
- Frame / Face-plate, screws and mounting support

Zenit British Standard – Complete sets

Product ID	Model	Color option	Switches and push buttons	Function size (mm)
2CLA210109B1101	AM21010	BL	Switch 1-gang, 1-way, SP 10AX, small size w / frame	22x44
2CLA210209B1101	AM21020	BL	Switch 1-gang, 2-way, SP 10AX, small size w / frame	22x44
2CLA211009B1101	AM21100	BL	Switch 1-gang Intermediate, SP 10AX, small size w / frame	22x44
2CLA210119B1101	AM21011	BL	Switch 1-gang, 1-way, SP 20AX, small size w / frame	22x44
2CLA210219B1101	AM21021	BL	Switch 1-gang, 2-way, SP 20AX, small size w / frame	22x44
2CLA210139B1101	AM21013	BL	Switch 1-gang, 1-way, DP 20AX, small size with LED w / frame	22x44
2CLA210409B1101	AM21040	BL	Push button 1-gang, 1-way, SP 10AX, small size w / frame	22x44
2CLA210449B1101	AM21044	BL	Push button 1-gang, 1-way, SP 10AX, small size with Bell w / frame	22x44
2CLA221109B1101	AM22110	BL	Switch 2-gang, 1-way, SP 10AX, small size w / frame	44x44
2CLA230209B1101	AM23020	BL	Switch 3-gang, 2-way, SP 10AX, triple size w / frame	53x44
2CLA220109B1101	AM22010	BL	Switch 1-gang, 1-way, SP 10AX, premium size w / frame	44x44
2CLA220209B1101	AM22020	BL	Switch 1-gang, 2-way, SP 10AX, premium size w / frame	44x44
2CLA221009B1101	AM22100	BL	Switch 1-gang Intermediate, SP 10AX, premium size w / frame	44x44
2CLA220119B1101	AM22011	BL	Switch 1-gang, 1-way, SP 20AX, premium size w / frame	44x44
2CLA220219B1101	AM22021	BL	Switch 1-gang, 2-way, SP 20AX, premium size w / frame	44x44
2CLA220139B1101	AM22013	BL	Switch 1-gang, 1-way, DP 20AX, premium size with LED w / frame	44x44
2CLA220189B1101	AM22018	BL	Switch 1-gang, 1-way, DP 32AX, premium size w / frame	44x44
2CLA220149B1101	AM22014	BL	Switch 1-gang, 1-way, DP 45AX, premium size with LED -RJ w / frame	44x44
2CLA220169B1101	AM22016	BL	Switch 1-gang, 1-way, DP 45AX, premium size with LED -RJ w / long	44x44
2CLA220409B1101	AM22040	BL	Push button 1-gang, 1-way, SP 10AX, premium size w / frame	44x44
2CLA220449B1101	AM22044	BL	Push button 1-gang, 1-way, SP 10AX, premium size with bell w / frame	44x44

Product ID	Model	Color option	Socket outlets
2CLA223739B1101	AM22373	BL, PL, AN, CV	BS Single socket outlet 13A, DP switched
2CLA223749B1101	AM22374	BL, PL, AN, CV	BS Single socket outlet 13A, DP switched w / LED
2CLA223799B1101	AM22379	BL, PL, AN, CV	BS Single socket outlet 13A, with USB-charger type-C, DP switch
2CLA243719B1101	AM24371	BL, PL, AN, CV	BS Double socket outlet 13A, DP switched
2CLA243729B1101	AM24372	BL, PL, AN, CV	BS Double socket outlet 13A, DP switched w / LED
2CLA243799B1101	AM24379	BL, PL, AN, CV	BS Double socket outlet 13A, with USB-Charger Type-C+A, DP switch
2CLA223919B1101	AM22391	BL, PL, AN, CV	Universal socket outlet 13A, DP switched
2CLA243749B1101	AM24374	BL, PL, AN, CV	BS Cooker control unit 13A, DP sw. 45A.
2CLA223779B1101	AM22377	BL, PL, AN, CV	BS Single socket outlet 15A round-pin, DP switched w / LED
2CLA223759B1101	AM22375	BL, PL, AN, CV	BS Single socket outlet 5A round-pin, DP switched
2CLA280309B1101	AM28030	BL, PL, AN, CV	Shaver socket outlet
2CLA230859B1101	AM23085	BL, PL, AN, CV	Fuse connector unit 13A, w / flex outlet w / LED
2CLA230829B1101	AM23082	BL, PL, AN, CV	Fuse connector unit 13A, switched w / flex outlet w / LED

For more functions such as TV or data outlets, please see Modular system in page 876

Zenit British Standard – Complete sets

1-gang switches and push buttons | Small rocker size (22 x 44 mm)

Switch 1-gang, 1-way, SP 10AX, Small size w / frame

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 22 x 44 mm
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM21010 BL**	2CLA210109B1101	1

Switch 1-gang, 2-way, SP 20AX, Small size w / frame

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 22 x 44 mm
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM21021 BL**	2CLA210219B1101	1

Switch 1-gang, 2-way, SP 10AX, Small size w / frame

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 22 x 44 mm
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM21020 BL**	2CLA210209B1101	1

Switch 1-gang, 1-way, DP 20AX, Small size with. LED w / frame

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 22 x 44 mm
LED indicator and ON sign
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM21013 BL**	2CLA210139B1101	1

Switch 1-gang Intermediate, SP 10AX, Small size w / frame

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 22 x 44 mm
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM21100 BL**	2CLA211009B1101	1

Push button 1-gang, 1-way, SP 10AX, Small size w / frame

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 22 x 44 mm
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM21040 BL**	2CLA210409B1101	1

Switch 1-gang, 1-way, SP 20AX, Small size w / frame

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 22 x 44 mm
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM21011 BL**	2CLA210119B1101	1

Push button 1-gang, 1-way, SP 10AX, Small size with Bell w / frame

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 22 x 44 mm
LED indicator and bell sign
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM21044 BL**	2CLA210449B1101	1

2-gang switches

Switch 2-gang, 1-way, SP 10AX, Small size w / frame

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 44 x 44 mm
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM22110 BL**	2CLA221109B1101	1

3-gang switches

Switch 3-gang, 2-way, SP 10AX, Triple size w / frame

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 53 x 44 mm
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM23020 BL**	2CLA230209B1101	1

Zenit British Standard – Complete sets

Switches | Premium size (44 x 44 mm)

Switch 1-gang, 1-way, SP premium 10AX



Rated voltage: 250 Vac
Rated current: 10AX
Premium size rocker

Colour	Type	Order code	Pack/Qty.
White	**AM22010 BL**	2CLA220109B1101	1

Switch 1-gang, 2-way, SP premium 10AX



Rated voltage: 250 Vac
Rated current: 10AX
Premium size rocker

Colour	Type	Order code	Pack/Qty.
White	**AM22020 BL**	2CLA220209B1101	1

Switch 1-gang, intermediate, SP premium 10AX



Rated voltage: 250 Vac
Rated current: 10AX
Premium size rocker

Colour	Type	Order code	Pack/Qty.
White	**AM22100 BL**	2CLA221009B1101	1

Switch 1-gang, 1-way, SP premium 20AX



Rated voltage: 250 Vac
Rated current: 20AX
Premium size rocker

Colour	Type	Order code	Pack/Qty.
White	**AM22011 BL**	2CLA220119B1101	1

Switch 1-gang, 2-way, SP 20AX, Premium size w / frame



Rated voltage: 250 Vac
Rated current: 20AX
Function size: 44 x 44 mm
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM22021 BL**	2CLA220219B1101	1

Switch 1-gang, 1-way, DP 20AX, Premium size with LED w / frame

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 44 x 44 mm
LED indicator and ON sign
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	**AM22013 BL**	2CLA220139B1101	1

Switch 1-gang, 1-way, DP 32A, Premium size w / frame



Rated voltage: 250 Vac
Rated current: 32A
Function size: 44 x 44 mm
Includes frame and metal support with twin-earth

Colour	Type	Order code	Pack/Qty.
White	**AM22018 BL**	2CLA220189B1101	1

Switch 1-gang, 1-way, DP premium 45A

Rated voltage: 250 Vac
Rated current: 45A
Status indicator LED
Premium size rocker

Colour	Type	Order code	Pack/Qty.
White	**AM22014 BL**	2CLA220149B1101	1

Switch 1-gang, 1-way, DP premium 45A

Rated voltage: 250 Vac
Rated current: 45A
Status indicator LED
Premium size rocker
Large frame (147 x 86 mm)

Colour	Type	Order code	Pack/Qty.
White	**AM22016 BL**	2CLA220169B1101	1

Zenit British Standard – Complete sets

Push-button | Premium size (44 x 44 mm)

Push-button 1-gang, 1-way, SP premium 10A



Rated voltage: 250 Vac
Rated current: 10A
Premium size rocker

Colour	Type	Order code	Pack/Qty.
White	**AM22040 BL**	2CLA220409B1101	1

Switch 1-gang, 1-way, SP premium w / bell

Rated voltage: 250 Vac
Rated current: 10A
Bell symbol indicator LED
Premium size rocker

Colour	Type	Order code	Pack/Qty.
White	**AM22044 BL**	2CLA220449B1101	1

Zenit British Standard – Complete sets

Socket outlets

BS Single socket outlet 13A, DP switched

Rated voltage: 250 Vac
Rated current: 13A
Double pole switch
Includes child safety shutter
Includes frame and metal support with twin earth

Colour	Type	Order code	Pack/Qty.
White	AM22373 BL	2CLA223739B1101	1
Silver	AM22373 PL	2CLA223739B1301	1
Anthracite	AM22373 AN	2CLA223739B1801	1
Champagne	AM22373 CV	2CLA223739B1901	1

BS Single socket outlet 13A, DP switched w / LED

Rated voltage: 250 Vac
Rated current: 13A
Double pole switch
LED indicator
Includes child safety shutter
Includes frame and metal support with twin earth

Colour	Type	Order code	Pack/Qty.
White	AM22374 BL	2CLA223749B1101	1
Silver	AM22374 PL	2CLA223749B1301	1
Anthracite	AM22374 AN	2CLA223749B1801	1
Champagne	AM22374 CV	2CLA223749B1901	1

BS Single socket outlet 13A, with USB-Charger Type-C, DP switch

Rated voltage: 250 Vac. Rated current: 13A
Double pole switch
USB-C 18 W. with Advanced Charging
Includes child safety shutter
Includes frame and metal support with twin earth

Colour	Type	Order code	Pack/Qty.
White	AM22379 BL	2CLA223799B1101	1
Silver	AM22379 PL	2CLA223799B1301	1
Anthracite	AM22379 AN	2CLA223799B1801	1
Champagne	AM22379 CV	2CLA223799B1901	1

BS Double socket outlet 13A, DP switched

Rated voltage: 250 Vac
Rated current: 13A
Double pole switch
Includes child safety shutter
Includes frame and metal support with twin earth

Colour	Type	Order code	Pack/Qty.
White	AM24371 BL	2CLA243719B1101	1
Silver	AM24371 PL	2CLA243719B1301	1
Anthracite	AM24371 AN	2CLA243719B1801	1
Champagne	AM24371 CV	2CLA243719B1901	1

BS Double socket outlet 13A, DP switched w/LED

Rated voltage: 250 Vac. Rated current: 13A
Double pole switch
LED indicator
Includes child safety shutter
Includes frame and metal support with twin earth

Colour	Type	Order code	Pack/Qty.
White	AM24372 BL	2CLA243729B1101	1
Silver	AM24372 PL	2CLA243729B1301	1
Anthracite	AM24372 AN	2CLA243729B1801	1
Champagne	AM24372 CV	2CLA243729B1901	1

BS Double socket outlet 13A, with USB-Charger Type-C+A, DP switch

Rated voltage: 250 Vac. Rated current: 13A
Double pole switch. USB-C 18 W. with Advanced Charging
USB-A 18 W. (shared). Includes child safety shutter
Includes frame and metal support with twin earth

Colour	Type	Order code	Pack/Qty.
White	AM24379 BL	2CLA243799B1101	1
Silver	AM24379 PL	2CLA243799B1301	1
Anthracite	AM24379 AN	2CLA243799B1801	1
Champagne	AM24379 CV	2CLA243799B1901	1

BS Cooker control unit 13A, DP sw. 45A

Rated voltage: 250 Vac
Rated current (socket): 13A
Rated current (switch): 45A
LED indicator
Includes frame and metal support and twin earth

Colour	Type	Order code	Pack/Qty.
White	AM24374 BL	2CLA243749B1101	1
Silver	AM24374 PL	2CLA243749B1301	1
Anthracite	AM24374 AN	2CLA243749B1801	1
Champagne	AM24374 CV	2CLA243749B1901	1

Zenit British Standard – Complete sets

Socket outlets

Universal socket outlet 13A, DP switched



Rated voltage: 250 Vac
Rated current: 13A
Double pole switch
Includes child safety shutter
Includes frame and metal support with twin earth

Colour	Type	Order code	Pack/Qty.
White	AM22391 BL	2CLA223919B1101	1
Silver	AM22391 PL	2CLA223919B1301	1
Anthracite	AM22391 AN	2CLA223919B1801	1
Champagne	AM22391 CV	2CLA223919B1901	1

Round-pin Single socket outlet 15A, DP switched w/LED

Rated voltage: 250 Vac
Rated current: 15A
Double pole switch
LED indicator
Includes child safety shutter
Includes frame and metal support with twin earth

Colour	Type	Order code	Pack/Qty.
White	AM22377 BL	2CLA223779B1101	1
Silver	AM22377 PL	2CLA223779B1301	1
Anthracite	AM22377 AN	2CLA223779B1801	1
Champagne	AM22377 CV	2CLA223779B1901	1

Round-pin socket outlet 5A, DP switched

Rated voltage: 250 Vac
Rated current: 5A
Double pole switch
Includes child safety shutter
Includes frame and metal support with twin earth

Colour	Type	Order code	Pack/Qty.
White	AM22375 BL	2CLA223759B1101	1
Silver	AM22375 PL	2CLA223759B1301	1
Anthracite	AM22375 AN	2CLA223759B1801	1
Champagne	AM22375 CV	2CLA223759B1901	1

Shaver socket outlet

Input: 250 Vac / 20VA
Outputs: 115V and 230V
Size: 150 x 90 x 54 mm
Compatible with box model:
803.2

Colour	Type	Order code	Pack/Qty.
White	AM28030 BL	2CLA280309B1101	1
Silver	AM28030 PL	2CLA280309B1301	1
Anthracite	AM28030 AN	2CLA280309B1801	1
Champagne	AM28030 CV	2CLA280309B1901	1

Fuse connection unit

Fuse connector unit 13A, w/flex outlet w/LED

Rated voltage: 250 Vac
Rated current: 13A
LED indicator
Fuse breaking capacity: 6kA 264 Vac 50HN
Fuse size: Ø 6.3 x 25 mm
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	AM23085 BL	2CLA230859B1101	1
Silver	AM23085 PL	2CLA230859B1301	1
Anthracite	AM23085 AN	2CLA230859B1801	1
Champagne	AM23085 CV	2CLA230859B1901	1

Fuse connector unit 13A, Switched w/flex outlet w/LED

Rated voltage: 250 Vac. Rated current: 13A
LED indicator
Includes manual switch
Fuse breaking capacity: 6kA 264 Vac 50HN
Fuse size: Ø 6.3 x 25 mm
Includes frame and metal support

Colour	Type	Order code	Pack/Qty.
White	AM23082 BL	2CLA230829B1101	1
Silver	AM23082 PL	2CLA230829B1301	1
Anthracite	AM23082 AN	2CLA230829B1801	1
Champagne	AM23082 CV	2CLA230829B1901	1

Zenit British Standard
Modular system

All articles in this chapter need to be combined with others to complete the installation of the function. For instance, switches can be combined with different types of frames (1, 2, 3 or 4 gangs) and different colors. Simply check the function size to match the right frame for the function.

Product ID	Model	Color option	Switches and push buttons	Function size (mm)
2CLA210100B****	AMD21010	BL, PL, AN, CV	Switch 1-gang, 1-way, SP 10AX, small size	22x44
2CLA210200B****	AMD21020	BL, PL, AN, CV	Switch 1-gang, 2-way, SP 10AX, small size	22x44
2CLA211000B****	AMD21100	BL, PL, AN, CV	Switch 1-gang intermediate, SP 10AX, small size	22x44
2CLA210110B****	AMD21011	BL, PL, AN, CV	Switch 1-gang, 1-way, SP 20AX, small size	22x44
2CLA210210B****	AMD21021	BL, PL, AN, CV	Switch 1-gang, 2-way, SP 20AX, small size	22x44
2CLA210130B****	AMD21013	BL, PL, AN, CV	Switch 1-gang, 1-way, DP 20AX, small size w / LED	22x44
2CLA210140B****	AMD21014	BL, PL, AN, CV	Switch 1-gang, 1-way, DP 20AX, small size w / LED and heater symbol	22x44
2CLA210400B****	AMD21040	BL, PL, AN, CV	Push button 1-gang, 1-way, SP 10AX, small size	22x44
2CLA210440B****	AMD21044	BL, PL, AN, CV	Push button 1-gang, 1-way, SP 10AX, small size w / bell	22x44
2CLA220100B****	AMD22010	BL, PL, AN, CV	Switch 1-gang, 1-way, SP 10AX, premium size	44x44
2CLA220200B****	AMD22020	BL, PL, AN, CV	Switch 1-gang, 2-way, SP 10AX, premium size	44x44
2CLA221000B****	AMD22100	BL, PL, AN, CV	Switch 1-gang intermediate, SP 10AX, premium size	44x44
2CLA220110B****	AMD22011	BL, PL, AN, CV	Switch 1-gang, 1-way, SP 20AX, premium size	44x44
2CLA220210B****	AMD22021	BL, PL, AN, CV	Switch 1-gang, 2-way, SP 20AX, premium size	44x44
2CLA220130B****	AMD22013	BL, PL, AN, CV	Switch 1-gang, 1-way, DP 20AX, premium size w / LED	44x44
2CLA220150B****	AMD22015	BL, PL, AN, CV	Switch 1-gang, 1-way, DP 20AX, premium size w / LED and heater	44x44
2CLA220180B****	AMD22018	BL, PL, AN, CV	Switch 1-gang, 1-way, DP 32A, premium size	44x44
2CLA220140B****	AMD22014	BL, RJ	Switch 1-gang, 1-way, DP 45A, premium size w / LED	44x44
2CLA220400B****	AMD22040	BL, PL, AN, CV	Push button 1-gang, 1-way, SP 10AX, premium size	44x44
2CLA220440B****	AMD22044	BL, PL, AN, CV	Push button 1-gang, 1-way, SP 10AX, premium size w / bell	44x44
2CLA230200B****	AMD23020	BL, PL, AN, CV	Switch 3-gang, 2-way, SP 10AX, triple size	53x44
2CLA230210B****	AMD23021	BL, PL, AN, CV	Switch 3-gang, 2-way, SP 16AX, triple size	53x44
2CLA230400B****	AMD23040	BL, PL, AN, CV	Push button 3-gang, 1-way, SP 10AX, triple size	53x44

Zenit British Standard - Modular System

Product ID	Model	Color option	Frames	Function size (mm)
2CLA217100B****	AMD21710	BL, PL, AN, CV	Frame 1-gang – Window 22x44 - Single	22x44
2CLA217110B****	AMD2171	BL, PL, AN, CV	Frame 1-gang – Window 44x44 - Single	22x44
2CLA227100B****	AMD22710	BL, PL, AN, CV	Frame 1-gang – Window 44x44 – Multi.	44x44
2CLA237100B****	AMD23710	BL, PL, AN, CV	Frame 1-gang – Window 53x44	53x44
2CLA247200B****	AMD24720	BL, PL, AN, CV	Frame 2-gang – Window 44x44 – Multi.	44x44
2CLA267200B****	AMD26720	BL, PL, AN, CV	Frame 2-gang – Window 53x44 – Multi.	53x44
2CLA267310B****	AMD26731	BL, PL, AN, CV	Frame 3-gang – Window 44x44 – Multi.	44x44
2CLA287410B****	AMD28741	BL, PL, AN, CV	Frame 4-gang – Window 44x44 – Multi.	44x44
2CLA227120B****	AMD22712	BL, PL, AN, CV	Frame 1-gang – Window 44x44 – Twin-Earth	44x44
2CLA227160B****	AMD22716	BL, PL, AN, CV	Frame 1-gang – Window 44x44 – Long	44x44

Product ID	Model	Color option	Modular functions (USB chargers, dimmers, TV/SAT, etc...)	Function size (mm)
2CLA223700B****	N2237	BL, PL, AN, CV	Insert - Modular BS socket outlet	44x44
2CLA228800B****	N2288	BL, PL, AN, CV	Insert - Modular Schuko socket outlet	44x44
2CLA223900B****	N2239	BL, PL, AN, CV	Insert - Modular Universal socket outlet	44x44
2CLA223800B****	N2238	BL, PL, AN, CV	Insert - Modular Euro-American socket outlet	44x44
2CLA213300B****	N2133	BL, PL, AN, CV	Insert - Modular Italian socket outlet	22x44
2CLA213800B****	N2138	BL, PL, AN, CV	Insert - Modular Euro-American socket outlet	22x44
2CLA228510B****	N2285.1	BL, PL, AN, CV	Insert - Modular USB Charger 18W	44x44
2CLA218520B****	N2185.2	BL, PL, AN, CV	Insert - Modular USB Charger 10W	22x44
2CLA220729B****	AMD22072	AP, BL	Flex outlet 20A	44x44
2CLA620739N****	AM56086	AP, BL	Flex outlet 45A	-
2CLA216030B****	N2160.3	BL, PL, AN, CV	Insert - Dimmer LED 22x44	22x44
2CLA226030B****	N2260.3	BL, PL, AN, CV	Insert - Dimmer LED 22x44	44x44
2CLA226090B****	N2260.9	BL, PL, AN, CV	Insert - Dimmer 1-10V 44x44	44x44
2CLA228040B****	N2280.4	BL, PL, AN, CV	DND / MUR corridor unit 10AX	44x44
2CLA224440B****	N2244.4	BL, PL, AN, CV	DND / MUR room unit 16AX	44x44
2CLA224410B****	N2244.1	BL, PL, AN, CV	Blind control switch 16AX	44x44
2CLA221410B****	N2214.1	BL, PL, AN, CV	Card switch 16AX	44x44
2CLA221450B****	N2214.5	BL, PL, AN, CV	Electronic card switch 16AX w/timer	44x44
2CLA221460B****	N2214.6	BL, PL, AN, CV	Electronic card switch 16AX w/RFID	44x44
2CLA215070B****	N2150.7	BL, PL, AN, CV	TV outlet M-type 22x44	22x44
2CLA225070B****	N2250.7	BL, PL, AN, CV	TV outlet M-type 44x44	44x44
2CLA215000B****	N2150	BL, PL, AN, CV	TV/SAT outlet F-type screw-in 22x44	22x44
2CLA225000B****	N2250	BL, PL, AN, CV	TV/SAT outlet F-type screw-in 44x44	44x44
2CLA215170B****	N2151.7	BL, PL, AN, CV	TV outlet M-type + SAT F-Type dead-end 22x44	22x44
2CLA215180B****	N2151.8	BL, PL, AN, CV	TV outlet M-type + SAT F-Type loop 22x44	22x44
2CLA211870B****	N2118.7	BL, PL, AN, CV	Phone outlet RJ45 Cat 6A 22x44	22x44
2CLA221870B****	N2218.7	BL, PL, AN, CV	Phone outlet RJ45 Cat 6A 44x44	44x44
2CLA211860B****	N2118.6	BL, PL, AN, CV	Phone outlet RJ45 Cat6 22x44	22x44
2CLA221860B****	N2218.6	BL, PL, AN, CV	Phone outlet RJ45 Cat6 44x44	44x44
2CLA211760B****	N2117.6	BL, PL, AN, CV	Phone outlet RJ12 22x44	22x44
2CLA221760B****	N2217.6	BL, PL, AN, CV	Phone outlet RJ12 44x44	44x44
2CLA210000B****	N2100	BL, PL, AN, CV	Blank coverate 22x44	22x44
2CLA220000B****	N2200	BL, PL, AN, CV	Blank coverate 44x44	44x44

Zenit British Standard - Modular system

Switches | Small size (22 x 44 mm)

Switch 1-gang, 1-way, SP 10AX, Small size

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 22 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD21010 BL**	2CLA210100B1101	10
Silver	**AMD21010 PL**	2CLA210100B1301	10
Anthracite	**AMD21010 AN**	2CLA210100B1801	10
Champagne	**AMD21010 CV**	2CLA210100B1901	10

Switch 1-gang, 2-way, SP 10AX, Small size

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 22 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD21020 BL**	2CLA210200B1101	10
Silver	**AMD21020 PL**	2CLA210200B1301	10
Anthracite	**AMD21020 AN**	2CLA210200B1801	10
Champagne	**AMD21020 CV**	2CLA210200B1901	10

Switch 1-gang Intermediate, SP 10AX, Small size

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 22 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD21100 BL**	2CLA211000B1101	10
Silver	**AMD21100 PL**	2CLA211000B1301	10
Anthracite	**AMD21100 AN**	2CLA211000B1801	10
Champagne	**AMD21100 CV**	2CLA211000B1901	10

Switch 1-gang, 1-way, SP 20AX, Small size

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 22 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD21011 BL**	2CLA210110B1101	10
Silver	**AMD21011 PL**	2CLA210110B1301	10
Anthracite	**AMD21011 AN**	2CLA210110B1801	10
Champagne	**AMD21011 CV**	2CLA210110B1901	10

Switch 1-gang, 2-way, SP 20AX, Small size

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 22 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD21021 BL**	2CLA210210B1101	10
Silver	**AMD21021 PL**	2CLA210210B1301	10
Anthracite	**AMD21021 AN**	2CLA210210B1801	10
Champagne	**AMD21021 CV**	2CLA210210B1901	10

Switch 1-gang, 1-way, DP 20AX, Small size w/ LED

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 22 x 44 mm
LED indicator and ON sign

Colour	Type	Order code	Pack/Qty.
White	**AMD21013 BL**	2CLA210130B1101	10
Silver	**AMD21013 PL**	2CLA210130B1301	10
Anthracite	**AMD21013 AN**	2CLA210130B1801	10
Champagne	**AMD21013 CV**	2CLA210130B1901	10

Switch 1-gang, 1-way, DP 20AX, Small size w/ LED and Heater symbol

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 22 x 44 mm
LED indicator and WATER HEATER sign

Colour	Type	Order code	Pack/Qty.
White	**AMD21014 BL**	2CLA210140B1101	10
Silver	**AMD21014 PL**	2CLA210140B1301	10
Anthracite	**AMD21014 AN**	2CLA210140B1801	10
Champagne	**AMD21014 CV**	2CLA210140B1901	10

Push button 1-gang, 1-way, SP 10AX, Small size

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 22 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD21040 BL**	2CLA210400B1101	10
Silver	**AMD21040 PL**	2CLA210400B1301	10
Anthracite	**AMD21040 AN**	2CLA210400B1801	10
Champagne	**AMD21040 CV**	2CLA210400B1901	10

Push button 1-gang, 1-way, SP 10AX, Small size w/ bell

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 22 x 44 mm
LED indicator and bell sign

Colour	Type	Order code	Pack/Qty.
White	**AMD21044 BL**	2CLA210440B1101	10
Silver	**AMD21044 PL**	2CLA210440B1301	10
Anthracite	**AMD21044 AN**	2CLA210440B1801	10
Champagne	**AMD21044 CV**	2CLA210440B1901	10

Zenit British Standard - Modular system

Switches | Premium size (44 x 44 mm)

Switch 1-gang, 1-way, SP 10AX, Premium size

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 44 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD22010 BL**	2CLA220100B1101	10
Silver	**AMD22010 PL**	2CLA220100B1301	10
Anthracite	**AMD22010 AN**	2CLA220100B1801	10
Champagne	**AMD22010 CV**	2CLA220100B1901	10

Switch 1-gang, 2-way, SP 10AX, Premium size

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 44 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD22020 BL**	2CLA220200B1101	10
Silver	**AMD22020 PL**	2CLA220200B1301	10
Anthracite	**AMD22020 AN**	2CLA220200B1801	10
Champagne	**AMD22020 CV**	2CLA220200B1901	10

Switch 1-gang Intermediate, SP 10AX, Premium size

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 44 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD22100 BL**	2CLA221000B1101	10
Silver	**AMD22100 PL**	2CLA221000B1301	10
Anthracite	**AMD22100 AN**	2CLA221000B1801	10
Champagne	**AMD22100 CV**	2CLA221000B1901	10

Switch 1-gang, 1-way, SP 20AX, Premium size

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 44 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD22011 BL**	2CLA220110B1101	10
Silver	**AMD22011 PL**	2CLA220110B1301	10
Anthracite	**AMD22011 AN**	2CLA220110B1801	10
Champagne	**AMD22011 CV**	2CLA220110B1901	10

Switch 1-gang, 2-way, SP 20AX, Premium size

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 44 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD22021 BL**	2CLA220210B1101	10
Silver	**AMD22021 PL**	2CLA220210B1301	10
Anthracite	**AMD22021 AN**	2CLA220210B1801	10
Champagne	**AMD22021 CV**	2CLA220210B1901	10

Switch 1-gang, 1-way, DP 20AX, Premium size w/ LED

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 44 x 44 mm
LED indicator and ON sign

Colour	Type	Order code	Pack/Qty.
White	**AMD22013 BL**	2CLA220130B1101	10
Silver	**AMD22013 PL**	2CLA220130B1301	10
Anthracite	**AMD22013 AN**	2CLA220130B1801	10
Champagne	**AMD22013 CV**	2CLA220130B1901	10

Switch 1-gang, 1-way, DP 20AX, Premium size w/ LED and Heater symbol

Rated voltage: 250 Vac
Rated current: 20AX
Function size: 44 x 44 mmLED indicator and WATER HEATER sign

Colour	Type	Order code	Pack/Qty.
White	**AMD22015 BL**	2CLA220150B1101	10
Silver	**AMD22015 PL**	2CLA220150B1301	10
Anthracite	**AMD22015 AN**	2CLA220150B1801	10
Champagne	**AMD22015 CV**	2CLA220150B1901	10

Switch 1-gang, 1-way, DP 32A, Premium size

Rated voltage: 250 Vac
Rated current: 32A
Function size: 44 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD22018 BL**	2CLA220180B1101	10
Silver	**AMD22018 PL**	2CLA220180B1301	10
Anthracite	**AMD22018 AN**	2CLA220180B1801	10
Champagne	**AMD22018 CV**	2CLA220180B1901	10

Switch 1-gang, 1-way, DP 45A, Premium size w/ LED

Rated voltage: 250 Vac
Rated current: 45A
Function size: 44 x 44 mm
LED indicator

Colour	Type	Order code	Pack/Qty.
White	**AMD22014 BL**	2CLA220140B1101	10
Red	**AMD22014 RJ**	2CLA220140B7001	10

Zenit British Standard - Modular System

Push button | Premium size (44 x 44 mm)

Push button 1-gang, 1-way, SP 10AX, Premium size

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 44 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD22040 BL**	2CLA220400B1101	10
Silver	**AMD22040 PL**	2CLA220400B1301	10
Anthracite	**AMD22040 AN**	2CLA220400B1801	10
Champagne	**AMD22040 CV**	2CLA220400B1901	10

Push button 1-gang, 1-way, SP 10AX, Premium size

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 44 x 44 mm
LED indicator and bell sign

Colour	Type	Order code	Pack/Qty.
White	**AMD22044 BL**	2CLA220440B1101	10
Silver	**AMD22044 PL**	2CLA220440B1301	10
Anthracite	**AMD22044 AN**	2CLA220440B1801	10
Champagne	**AMD22044 CV**	2CLA220440B1901	10

Zenit British Standard - Modular system

Switches | Triple rocker size (53 x 44 mm)

Switch 3-gang, 2-way, SP 10AX, Triple size

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 53 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD23020 BL**	2CLA230200B1101	10
Silver	**AMD23020 PL**	2CLA230200B1301	10
Anthracite	**AMD23020 AN**	2CLA230200B1801	10
Champagne	**AMD23020 CV**	2CLA230200B1901	10

Switch 3-gang, 2-way, SP 16AX, Triple size

Rated voltage: 250 Vac
Rated current: 16AX
Function size: 53 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD23021 BL**	2CLA230210B1101	10
Silver	**AMD23021 PL**	2CLA230210B1301	10
Anthracite	**AMD23021 AN**	2CLA230210B1801	10
Champagne	**AMD23021 CV**	2CLA230210B1901	10

Push button | Triple rocker size (53 x 44 mm)

Push button 3-gang, 1-way, SP 10AX, Triple size

Rated voltage: 250 Vac
Rated current: 10AX
Function size: 53 x 44 mm

Colour	Type	Order code	Pack/Qty.
White	**AMD23040 BL**	2CLA230400B1101	10
Silver	**AMD23040 PL**	2CLA230400B1301	10
Anthracite	**AMD23040 AN**	2CLA230400B1801	10
Champagne	**AMD23040 CV**	2CLA230400B1901	10

Zenit British Standard - Modular system

Frames including metal support

Frame 1-gang – Window 22 x 44 -Single

Frame dimensions: 86 x 86 mm
Window size: 22 x 44 mm
Includes metal support and screws
Extra robustness for Small switches
(single function only)

Colour	Type	Order code	Pack/Qty.
White	**AMD21710 BL**	2CLA217100B1101	10
Silver	**AMD21710 PL**	2CLA217100B1301	10
Anthracite	**AMD21710 AN**	2CLA217100B1801	10
Champagne	**AMD21710 CV**	2CLA217100B1901	10

Frame 1-gang – Window 44 x 44 -Single

Frame dimensions: 86 x 86 mm
Window size: 44 x 44 mm
Includes metal support and screws
Extra robustness for Premium switches
(single function only)

Colour	Type	Order code	Pack/Qty.
White	**AMD21711 BL**	2CLA217110B1101	10
Silver	**AMD21711 PL**	2CLA217110B1301	10
Anthracite	**AMD21711 AN**	2CLA217110B1801	10
Champagne	**AMD21711 CV**	2CLA217110B1901	10

Frame 1-gang – Window 44 x 44 –Multifunction

Frame dimensions: 86 x 86 mm
Window size: 44 x 44 mm
Includes metal support and screws
For multiple function configurations

Colour	Type	Order code	Pack/Qty.
White	**AMD22710 BL**	2CLA227100B1101	10
Silver	**AMD22710 PL**	2CLA227100B1301	10
Anthracite	**AMD22710 AN**	2CLA227100B1801	10
Champagne	**AMD22710 CV**	2CLA227100B1901	10

Frame 1-gang – Window 53 x 44

Frame dimensions: 86 x 86 mm
Window size: 53 x 44 mm
Includes metal support and screws
For Triple rocker switches

Colour	Type	Order code	Pack/Qty.
White	**AMD23710 BL**	2CLA237100B1101	10
Silver	**AMD23710 PL**	2CLA237100B1301	10
Anthracite	**AMD23710 AN**	2CLA237100B1801	10
Champagne	**AMD23710 CV**	2CLA237100B1901	10

Frame 2-gang – Window 44 x 44 – Multifunction

Frame dimensions: 147 x 86 mm
Window size: 2*44 x 44 mm
Includes metal support and screws
For multiple function configurations

Colour	Type	Order code	Pack/Qty.
White	**AMD24720 BL**	2CLA247200B1101	10
Silver	**AMD24720 PL**	2CLA247200B1301	10
Anthracite	**AMD24720 AN**	2CLA247200B1801	10
Champagne	**AMD24720 CV**	2CLA247200B1901	10

Frame 2-gang – Window 53 x 44

Frame dimensions: 147 x 86 mm
Window size: 2*53 x 44 mm
Includes metal support and screws
For Triple rocker switches

Colour	Type	Order code	Pack/Qty.
White	**AMD26720 BL**	2CLA267200B1101	10
Silver	**AMD26720 PL**	2CLA267200B1301	10
Anthracite	**AMD26720 AN**	2CLA267200B1801	10
Champagne	**AMD26720 CV**	2CLA267200B1901	10

Frame 3-gang –Window 44 x 44 – Multifunction

Frame dimensions: 228 x 86 mm
Window size: 3*44 x 44 mm
Includes metal support and screws
For multiple function configurations
Compatible with box model: 1099

Colour	Type	Order code	Pack/Qty.
White	**AMD26731 BL**	2CLA267310B1101	5
Silver	**AMD26731 PL**	2CLA267310B1301	5
Anthracite	**AMD26731 AN**	2CLA267310B1801	5
Champagne	**AMD26731 CV**	2CLA267310B1901	5

Frame 4-gang – Window 44 x 44 – Multifunction

Frame dimensions: 293 x 86 mm
Window size: 4*44 x 44 mm
Includes metal support and screws
For multiple function configurations
Compatible with box model: 1099

Colour	Type	Order code	Pack/Qty.
White	**AMD28741 BL**	2CLA287410B1101	5
Silver	**AMD28741 PL**	2CLA287410B1301	5
Anthracite	**AMD28741 AN**	2CLA287410B1801	5
Champagne	**AMD28741 CV**	2CLA287410B1901	5

Zenit British Standard - Modular system

Frames with metal support and twin earth terminals

Frame 1-gang –Window 44 x 44 –Twin-Earth

Frame dimensions: 86 x 86 mm
Window size: 44 x 44 mm
Includes metal support with twin-earth terminals and screws.

Colour	Type	Order code	Pack/Qty.
White	**AMD22712 BL**	2CLA227120B1101	10
Silver	**AMD22712 PL**	2CLA227120B1301	10
Anthracite	**AMD22712 AN**	2CLA227120B1801	10
Champagne	**AMD22712 CV**	2CLA227120B1901	10

Frame 1-gang –Window 44 x 44 – Twin-Earth Large size

Frame dimensions: 86 x 147 mm
Window size: 44 x 44 mm
Includes metal support with twin-earth terminals and screws.

Colour	Type	Order code	Pack/Qty.
White	**AMD22716 BL**	2CLA227160B1101	10
Silver	**AMD22716 PL**	2CLA227160B1301	10
Anthracite	**AMD22716 AN**	2CLA227160B1801	10
Champagne	**AMD22716 CV**	2CLA227160B1901	10

Pro tip: Twin-earth terminals
Special frames are available including two earth terminals in the mounting frame.This is an easy and quick solution for installations where high amperage devices (32A, 45A) might require more room to connect earth wires.

Zenit British Standard - Modular system

Function | Socket outlets

Insert - Modular BS socket outlet

Rated voltage: 250 Vac
Rated current: 13A
Type G: 2P + E
Includes child safety shutter
Combine with frame window 44 x 44 – Multi

Colour	Type	Order code	Pack/Qty.
White	**N2237 BL**	2CLA223700B1101	10
Silver	**N2237 PL**	2CLA223700B1301	10
Anthracite	**N2237 AN**	2CLA223700B1801	10
Champagne	**N2237 CV**	2CLA223700B1901	10

Insert - Modular Schuko socket outlet

Rated voltage: 250 Vac
Rated current: 16A
Type F: 2P + E
Includes child safety shutter
Combine with frame window 44 x 44 – Multi

Colour	Type	Order code	Pack/Qty.
White	**N2288 BL**	2CLA228800B1101	10
Silver	**N2288 PL**	2CLA228800B1301	10
Anthracite	**N2288 AN**	2CLA228800B1801	10
Champagne	**N2288 CV**	2CLA228800B1901	10

Insert - Modular Universal socket outlet

Rated voltage: 250 Vac / 125 Vac
Rated current: 16A / 13A
Multiple type: 2P + E
Includes child safety shutter
Combine with frame window 44 x 44 – Multi

Colour	Type	Order code	Pack/Qty.
White	**N2239 BL**	2CLA223900B1101	10
Silver	**N2239 PL**	2CLA223900B1301	10
Anthracite	**N2239 AN**	2CLA223900B1801	10
Champagne	**N2239 CV**	2CLA223900B1901	10

Insert - Modular Euro-American socket outlet

Rated voltage: 250 Vac / 125 Vac
Rated current: 16A / 13A
Type B+C: 2P / NEMA 5-15R
Includes child safety shutter
Combine with frame window 44 x 44 – Multi

Colour	Type	Order code	Pack/Qty.
White	**N2238 BL**	2CLA223800B1101	10
Silver	**N2238 PL**	2CLA223800B1301	10
Anthracite	**N2238 AN**	2CLA223800B1801	10
Champagne	**N2238 CV**	2CLA223800B1901	10

Insert - Modular Italian socket outlet

Rated voltage: 250 Vac
Rated current: 16A
Type L: 2P + E / P17/11
Includes child safety shutter
Combine with any 22 x 44 or 44 x 44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2133 BL**	2CLA213300B1101	20
Silver	**N2133 PL**	2CLA213300B1301	20
Anthracite	**N2133 AN**	2CLA213300B1801	20
Champagne	**N2133 CV**	2CLA213300B1901	20

Insert - Modular Euro-American socket outlet 22 x 44

Rated voltage: 250 Vac / 125 Vac
Rated current: 16A / 15A
Type B 2P / NEMA 5-15R
Includes child safety shutter
Combine with any 22 x 44 or 44 x 44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2138 BL**	2CLA213800B1101	20
Silver	**N2138 PL**	2CLA213800B1301	20
Anthracite	**N2138 AN**	2CLA213800B1801	20
Champagne	**N2138 CV**	2CLA213800B1901	20

Function | Fuse connection unit

Flex Outlet 20A

Rated current: 20A
Combine with frame window 44 x 44 –Twin earth

Colour	Type	Order code	Pack/Qty.
Anthracite	**AMD22072 AP**	2CLA220729B1001	10
White	**AMD22072 BL**	2CLA220729B1101	10

Flex Outlet 45A

Rated current: 45A
Includes frame and metal support with twin earth

Colour	Type	Order code	Pack/Qty.
Anthracite	**AM56086 AP**	2CLA620739N1801	1
White Plastic	**AM56086 BL**	2CLA620739N2001	1

Zenit British Standard - Modular system

Function | USB chargers

USB charger Type A+C 18W - 44 x 44

250 Vac / 50-60 Hz

USB-C:
Max. Power output: 18W
Output voltage: 5 ... 9 Vdc.
Output current: 3 ... 1.5 A.

USB-A: 5 Vdc (max. 2,1 A).
USB-A+C simultaneously: 5 Vdc (max .3 A)

Charging Protocols:
PD 3.0. QC 4.0, QC 3.0, QC 2.0, MFi 2,4A, BC 1.2,

Frame AMD5144-XX & AMD5244-XX.

Colour	Type	Order code	Pack/Qty.
Anthracite P.	**N2285.1 AP**	2CLA228510B1001	1
White	**N2285.1 BL**	2CLA228510B1101	1

USB charger Type A+C 15W - 44 x 44

NEW

250 Vac / 50-60 Hz

USB-A: 5 Vdc (max. 2,4 A).
USB-C: 5 Vdc (max. 3 A).
USB-A+C simultaneously: 5 Vdc (total max .3 A

Charging Protocols:
USB-C, DFP 5V/3A, MFi 2,4A, BC 1.2, DCP 5V/1,5A

Frame AMD5144-XX & AMD5244-XX.

Colour	Type	Order code	Pack/Qty.
Anthracite P.	**N2285.4 AP**	2CLA228540B1001	1
White	**N2285.4 BL**	2CLA228540B1101	1

USB charger Type C+C 30W - 44 x 44

NEW

250 Vac / 50-60 Hz

USB-C:
Max. Power output: 30W
Output voltage: 5 ... 20 Vdc.
Output current: 3 ... 1.5 A.

USB C+C simultaneously:
Max Power output: 15 W
Output voltage: 5 Vdc
Output current: 2.1 A

Charging Protocols:
PD 3.0. QC 4.0, QC 3.0, QC 2.0, MFi 2,4A, BC 1.2,

Frame AMD5144-XX & AMD5244-XX.

Colour	Type	Order code	Pack/Qty.
Anthracite P.	**N2285.5 AP**	2CLA228550B1001	1
White	**N2285.5 BL**	2CLA228550B1101	1

USB charger Type A+C 15W - 22 x 44

NEW

250 Vac / 50-60 Hz

USB-A: 5 Vdc (max. 2,4 A).
USB-C: 5 Vdc (max. 3 A).
USB-A+C simultaneously: 5 Vdc (total max .3 A

Charging Protocols:
USB-C, DFP 5V/3A, MFi 2,4A, BC 1.2, DCP 5V/1,5A

Frame AMD5144-XX & AMD5244-XX.

Colour	Type	Order code	Pack/Qty.
Anthracite P.	**N2185.4 AP**	2CLA218540B1001	1
White	**N2185.4 BL**	2CLA218540B1101	1

Zenit British Standard - Modular system

Function | Dimmers

Universal rotary dimmer – 1M

Rated voltage: 230 Vac ± 10%
Frequency: 50-60Hz
Power (min./max load):
- LEDi (trailing-edge lamps), LV LEDi with transformer type C, LV halogen with transformer (type C or LC) and incandescent and halogen lamps: 4/250 W/VA.
- LEDi (leading-edge lamps) and LV LEDi with transformer type LC: 4/60W/VA*
* Max. 10 lamps
Load selection
2 or 3 wire connection
OFF position
Electronic back-up fuse and overload protection
Ambient temperature: 0° C to +35° C

Colour	Type	Order code	Pack/Qty.
White	**N2160.3 BL**	2CLA216030B1101	1
Silver	**N2160.3 PL**	2CLA216030B1301	1
Anthracite	**N2160.3 AN**	2CLA216030B1801	1
Champagne	**N2160.3 CV**	2CLA216030B1901	1

Universal rotary dimmer – 2M

Rated voltage: 230 Vac ± 10%
Frequency: 50Hz (250W/VA) / 60Hz (200W/VA)
Power (min./max load):
- LEDi, dimmable CFL and LV LEDi with transformer (L or LC): 2/100W/VA*
- Incandescent and halogen lamps: 10/250W/VA
- LV halogen w/transformer (L or LC): 10/250W/VA*
* max. 10 lamps
2 wire connection
Optional: auxiliary on/off with 2-way switch N2X02
Indicator LED lamp included
Electronic back-up fuse and overload protection
Ambient temperature 0° C to +35° C

Colour	Type	Order code	Pack/Qty.
White	**N2260.3 BL**	2CLA226030B1101	1
Silver	**N2260.3 PL**	2CLA226030B1301	1
Anthracite	**N2260.3 AN**	2CLA226030B1801	1
Champagne	**N2260.3 CV**	2CLA226030B1901	1

Function I Blank plates

Blank cover plate – 1M

Flat blank plate

Combine with any 22 x 44 or 44 x 44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2100 BL**	2CLA210000B1101	1
Silver	**N2100 PL**	2CLA210000B1301	1
Anthracite	**N2100 AN**	2CLA210000B1801	1
Champagne	**N2100 CV**	2CLA210000B1901	1

Blank cover plate – 2M

Flat blank plate

Combine with any 22 x 44 or 44 x 44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2200 BL**	2CLA220000B1101	1
Silver	**N2200 PL**	2CLA220000B1301	1
Anthracite	**N2200 AN**	2CLA220000B1801	1
Champagne	**N2200 CV**	2CLA220000B1901	1

1-10V rotary dimmer - 2M

Rated voltage: 127 - 230 Vac / 50-60Hz
Dimmable electronic ballast/driver 1-10V control input.
Max. power (max. 6 ballasts per device):
700 VA @ 230 Vac / 350 VA @ 127 Vac
Indicator LED lamp included.

Colour	Type	Order code	Pack/Qty.
White	**N2260.9 BL**	**2CLA226090B1101**	1
Silver	**N2260.9 PL**	**2CLA226090B1301**	1
Anthracite	**N2260.9 AN**	**2CLA226090B1801**	1
Champagne	**N2260.9 CV**	**2CLA226090B1901**	1

Zenit British Standard - Modular system

Function | Hospitality

DND/MUR corridor unit 10AX

Rated voltage: 250 Vac
Rated current: 10AX
Includes red / green indication and bell sign
Function size: 44 x 44 mm
Combine with frame window 44 x 44 – Multi.

Colour	Type	Order code	Pack/Qty.
White	**N2280.4 BL**	2CLA228040B1101	10
Silver	**N2280.4 PL**	2CLA228040B1301	10
Anthracite	**N2280.4 AN**	2CLA228040B1801	10
Champagne	**N2280.4 CV**	2CLA228040B1901	10

DND/MUR room unit 16AX

Rated voltage: 250 Vac
Rated current: 16AX
Interlocked gangs
Time-saving screwless connection
Includes red / green indication and bell sign
Function size: 44 x 44 mm
Combine with frame window 44 x 44 – Multi.

Colour	Type	Order code	Pack/Qty.
White	**N2244.4 BL**	**2CLA224440B1101**	10
Silver	**N2244.4 PL**	**2CLA224440B1301**	10
Anthracite	**N2244.4 AN**	**2CLA224440B1801**	10
Champagne	**N2244.4 CV**	**2CLA224440B1901**	10

Blind control switch 16AX

Rated voltage: 250 Vac
Rated current: 16AX
Direct control of blind motor
Interlocked gangs
Combine with frame window 44 x 44 – Multi.

Colour	Type	Order code	Pack/Qty.
White	**N2244.1 BL**	**2CLA224410B1101**	10
Silver	**N2244.1 PL**	**2CLA224410B1301**	10
Anthracite	**N2244.1 AN**	**2CLA224410B1801**	10
Champagne	**N2244.1 CV**	**2CLA224410B1901**	10

Card switch 16AX

Rated voltage: 250 Vac
Rated current: 16AX
Max. power: iLED 200W.
Includes LED indicator
Function size: 44 x 44 mm
Combine with frame window 44 x 44 – Multi.

Colour	Type	Order code	Pack/Qty.
White	**N2214.1 BL**	2CLA221410B1101	10
Silver	**N2214.1 PL**	2CLA221410B1301	10
Anthracite	**N2214.1 AN**	2CLA221410B1801	10
Champagne	**N2214.1 CV**	2CLA221410B1901	10

Electronic Card switch 16AX w/timer

Rated voltage: 250 Vac
Rated current: 16AX
Max. power: iLED200W / Traditional: 1600W
Includes LED indicator
Adjustable time-out: 5-90 seg.
Function size: 44 x 44 mm
Combine with frame window 44 x 44 – Multi.

Colour	Type	Order code	Pack/Qty.
White	**N2214.5 BL**	**2CLA221450B1101**	1
Silver	**N2214.5 PL**	**2CLA221450B1301**	1
Anthracite	**N2214.5 AN**	**2CLA221450B1801**	1
Champagne	**N2214.5 CV**	**2CLA221450B1901**	1

Electronic Card switch 16AX w/RFID

250 Vac 50-60 HN. / 16A
Rated voltage: 110 ... 230 V AC, ±10 %,
RFID card-only option:Yes
4 programming modes:
ECO, STANDARD, EXTENDED, CUSTOM
Status backlight: Yes
Dim-out deactivation: Yes
Adjustable time-out: 0-240 seg.
Output: 2*NO cotact
Electronic relay: Yes
Load compatibility (min. / max load):
-LEDi: 250 W/VA.
-LV LEDi with transformer type C: 4 / 250 W/VA.
-LV LEDi with transformer type LC: 4 / 60 W/VA.*
-LV halogen with transformer type C: 4 / 250 W/VA.
-LV halogen with transformer type LC: 4 / 250 W/VA.
-Incandescent lamps: 4 / 250 W/VA.
-Halogen lamps: 4 / 250 W / VA.
-Blind control (M-type) max. 2 Aem

Combine with frame window 44 x 44 – Multi.

Colour	Type	Order code	Pack/Qty.
White	**N2214.6 BL**	**2CLA221460B1101**	1
Silver	**N2214.6 PL**	**2CLA221460B1301**	1
Anthracite	**N2214.6 AN**	**2CLA221460B1801**	1
Champagne	**N2214.6 CV**	**2CLA221460B1901**	1

Zenit British Standard - Modular system

Function I TV/SAT outlets

TV outlet M-type - 22x44

Single TV outlet - Dead-end
M type - 9.52 mm male
For 75Ω impedance coaxial cable
Avoid small bending radius
Frequency range: 5 - 2.400 Mhz
Connection loss: 1 dB
Isolation: >16 dB
Return loss: >7,6 dB
DC path (Vdc / mA / Tono): 34 max. / 500 max. / 22kHz- DiSEqC
Combine with any 22x44 or 44x44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2150.7 BL**	2CLA215070B1101	10
Silver	**N2150.7 PL**	2CLA215070B1301	10
Anthracite	**N2150.7 AN**	2CLA215070B1801	10
Champagne	**N2150.7 CV**	2CLA215070B1901	10

TV M-type 44x44

Single TV outlet - Dead-end
M type - 9.52 mm. male
For 75Ω impedance coaxial cable
Avoid small bending radius
Frequency range: 5 - 2.400 Mhz
Connection loss: 1 dB
Isolation: >16 dB
Return loss: >7.6 dB
DC path (Vdc / mA / Tono): 34 max. / 500 max. / 22kHz- DiSEqC
Combine with 44x44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2250.7 BL**	2CLA225070B1101	10
Silver	**N2250.7 PL**	2CLA225070B1301	10
Anthracite	**N2250.7 AN**	2CLA225070B1801	10
Champagne	**N2250.7 CV**	2CLA225070B1901	10

TV/SAT outlet F-type screw-in 22x44

Single TV outlet
F type - female
For 75 Ω impedance coaxial cable
Frequency range: 0 - 2.0
Working voltage: 250 VRMS max. 00 Mhz
Dielectric withstanding voltage: 500 VRMS min.

Combine with any 22x44 or 44x44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2150 BL**	2CLA215000N1101	10
Silver	**N2150 PL**	2CLA215000N1301	10
Anthracite	**N2150 AN**	2CLA215000N1801	10
Champagne	**N2150 CV**	2CLA215000N1901	10

TV/SAT F-type screw-in 44x44

Single TV outlet
F type - female
For 75 Ω impedance coaxial cable
Frequency range: 0 - 2.000 Mhz
Working voltage: 250 VRMS max.
Dielectric withstanding voltage: 500 VRMS min.

Combine with 44x44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2250 BL**	2CLA225000B1101	10
Silver	**N2250 PL**	2CLA225000B1301	10
Anthracite	**N2250 AN**	2CLA225000B1801	10
Champagne	**N2250 CV**	2CLA225000B1901	10

TV outlet M-type + SAT F-Type dead-end 22x44

Single TV outlet - Dead end
- TV: M type - 9.52 mm male
- SAT: F type - female
For 75 Ω impedance coaxial cable
Frequency range (TV / SAT): 5 - 862 Mhz / 950 - 2.400 MHz
Output loss (TV / SAT): 1dB/1dB
Through loss (TV / SAT): 4dB/4dB
DC path (Vdc / mA / Tono): 34 max. / 500 max./ 22kHz - DiSEqC.

Colour	Type	Order code	Pack/Qty.
White	**N2151.7 BL**	2CLA215170B1101	10
Silver	**N2151.7 PL**	2CLA215170B1301	10
Anthracite	**N2151.7 AN**	2CLA215170B1801	10
Champagne	**N2151.7 CV**	2CLA215170B1901	10

TV outlet M-type + SAT F-Type intermediate 22x44

Single TV outlet - intermediate
- TV: M type - 9.52 mm male
- SAT: F type - female
For 75 Ω impedance coaxial cable
Frequency range (TV / SAT):
5 - 862 Mhz / 950 - 2.400 MHz.
Output loss (TV / SAT): 1 dB / 1 dB.
DC path (Vdc / mA / Tono): 34 max. / 500 max. / 22kHz - DiSEqC..

Combine with any 22x44 or 44x44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2151.7 BL**	2CLA215180B1101	10
Silver	**N2151.7 PL**	2CLA215180B1301	10
Anthracite	**N2151.7 AN**	2CLA215180B1801	10
Champagne	**N2151.7 CV**	2CLA215180B1901	10

Zenit British Standard - Modular system

Function I Data and telephone outlets

Data outlet RJ45 Cat6A 22 x 44

8 pole
Cat 6A
STP
Combine with any 22 x 44 or 44 x 44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2118.7 BL**	2CLA211870B1101	10
Silver	**N2118.7 PL**	2CLA211870B1301	10
Anthracite	**N2118.7 AN**	2CLA211870B1801	10
Champagne	**N2118.7 CV**	2CLA211870B1901	10

Data outlet RJ45 Cat 6A 44 x 44

8 pole
Cat 6A
STP
Combine with 44 x 44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2218.7 BL**	2CLA221870B1101	10
Silver	**N2218.7 PL**	2CLA221870B1301	10
Anthracite	**N2218.7 AN**	2CLA221870B1801	10
Champagne	**N2218.7 CV**	2CLA221870B1901	10

Data outlet RJ12 22 x 44

Data outlet RJ45 Cat6 22 x 44
8 pole
Cat 6
UTP
Combine with any 22 x 44 or 44 x 44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2118.6 BL**	2CLA211860B1101	10
Silver	**N2118.6 PL**	2CLA211860B1301	10
Anthracite	**N2118.6 AN**	2CLA211860B1801	10
Champagne	**N2118.6 CV**	2CLA211860B1901	10

Data outlet RJ45 Cat6 44 x 44

Data outlet RJ45 Cat6 44 x 44
8 pole
Cat 6
UTP
Combine with 44 x 44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2218.6 BL**	2CLA221860B1101	10
Silver	**N2218.6 PL**	2CLA221860B1301	10
Anthracite	**N2218.6 AN**	2CLA221860B1801	10
Champagne	**N2218.6 CV**	2CLA221860B1901	10

Phone outlet RJ12 22 x 44

RJ12 type connection
6 contacts
Combine with any 22 x 44 or 44 x 44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2117.6 BL**	2CLA211760B1101	10
Silver	**N2117.6 PL**	2CLA211760B1301	10
Anthracite	**N2117.6 AN**	2CLA211760B1801	10
Champagne	**N2117.6 CV**	2CLA211760B1901	10

Phone outlet RJ12 44 x 44

RJ12 type connection
6 contacts
Combine with 44 x 44 multi frames

Colour	Type	Order code	Pack/Qty.
White	**N2217.6 BL**	2CLA221760B1101	10
Silver	**N2217.6 PL**	2CLA221760B1301	10
Anthracite	**N2217.6 AN**	2CLA221760B1801	10
Champagne	**N2217.6 CV**	2CLA221760B1901	10

Zenit British Standard - Modular system

Function | Room Temperature Controllers

Product	Article-No.	Order-No.	Pack/Qty
	ON/OFF Room Temperature Controller For triggering the ventilation and fan-coil actuators in ON/OFF type installations. Thermostat for fan-coil units in 2 pipes systems. Display elements: LCD showing four operation modes: Cooling/Fan only/Energy saving/Sleep Selected models can use Modbus RS485 protocol. Rated voltage: 110-250 Vac / 50-60 Hz Load capacity: Resistive: 4 A; Inductive: 2 A Output voltage: 230 Vac Temperature sensor: internal NTC Temperature Setting Range 5-35°C (0.5°C sensitivity) Temperature accuracy: +/- 1°C Installation box: 86 x 86 x 47 mm (BS type)		
Standard models:			
White	**BR417**	2TCZ204001R0010	1
Black	**BR417-885**	2TCZ204001R4410	1
Modbus RS485 option models:			
White	**BR432**	2TCZ204003R0010	1
Black	**BR432-885**	2TCZ204003R4410	1

Product	Article-No.	Order-No.	Pack/Qty
	0-10Vdc Modulating Room Temperature Controller For triggering the ventilation and fan-coil actuators in modulating 0-10Vdc valve installations. Thermostat for fan-coil units in 2 pipe systems. Display elements: LCD showing four operation modes: Cooling/Fan only/Energy saving/Sleep Selected models can use Modbus RS485 protocol. Rated voltage: 24 Vac / 50-60 Hz Load capacity: Resistive: 4 A; Inductive: 2 A Output voltage: 0-10 Vdc (valve), 230 Vac (fan) Temperature sensor: internal NTC Temperature Setting Range 5-35°C (0.5°C sensitivity) Temperature accuracy: +/- 1°C Installation box 86 x 86 x 47 mm (BS type)		
Standard models:			
White	**BR483**	2TCZ204002R0010	1
Black	**BR483 -885**	2TCZ204002R4410	1
Modbus RS485 option models:			
White	**BR484**	2TCZ204004R0010	1
Black	**BR484 -885**	2TCZ204004R4410	1

Notes

Framia

Frameless elegance, harmony in every touch

The pursuit of beauty is a journey without end. The Framia series of frameless switches and sockets is ABB's profound understanding and respect for modern aesthetics. With its elegant design, smooth curves, and slim appearance, it skillfully combines simplicity with elegance and texture with aesthetics, creating a product that is both practical and beautiful. Integrating minimalist aesthetics into your daily life, it becomes an art piece on the wall.

01

02

01 White

02 Matt white - WM

03 Space grey - SG

04 Matt black - MB

05 Champagne gold - CH

03

04

05

Commercial building

The Framia series not only strives for perfection in design but also in material and craftsmanship. Made with high-quality plastics, copper and silver alloy materials, it ensures the safety and durability of the product perfect for high-traffic commercial spaces. Every touch conveys the delicacy and strength that comes from the material itself.

Homes

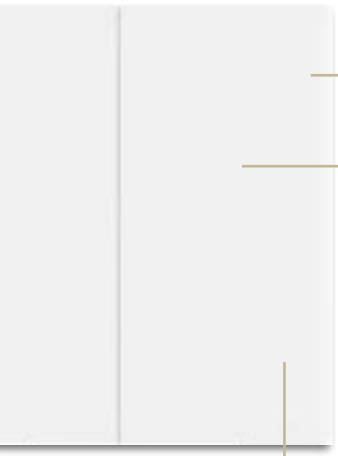

Framia is not just a light switch or a socket, but also a reflection of an attitude towards life. At ABB, we believe that good design can enhance the quality of life, and the Framia series with five colors is a manifestation of our commitment.

—
Electronic card switch, 16A

In the world of hospitality, the essence of comfort and convenience lies in the details. Framia is not merely a switch or socket, it is a statement of sophistication and a promise of exceptional guest experience. Framia refined aesthetics and intuitive functionality, is designed to meet the high standards of the hospitality industry. It's more than just a device to control lighting or power; it's an element that contributes to a seamless and luxurious guest environment.

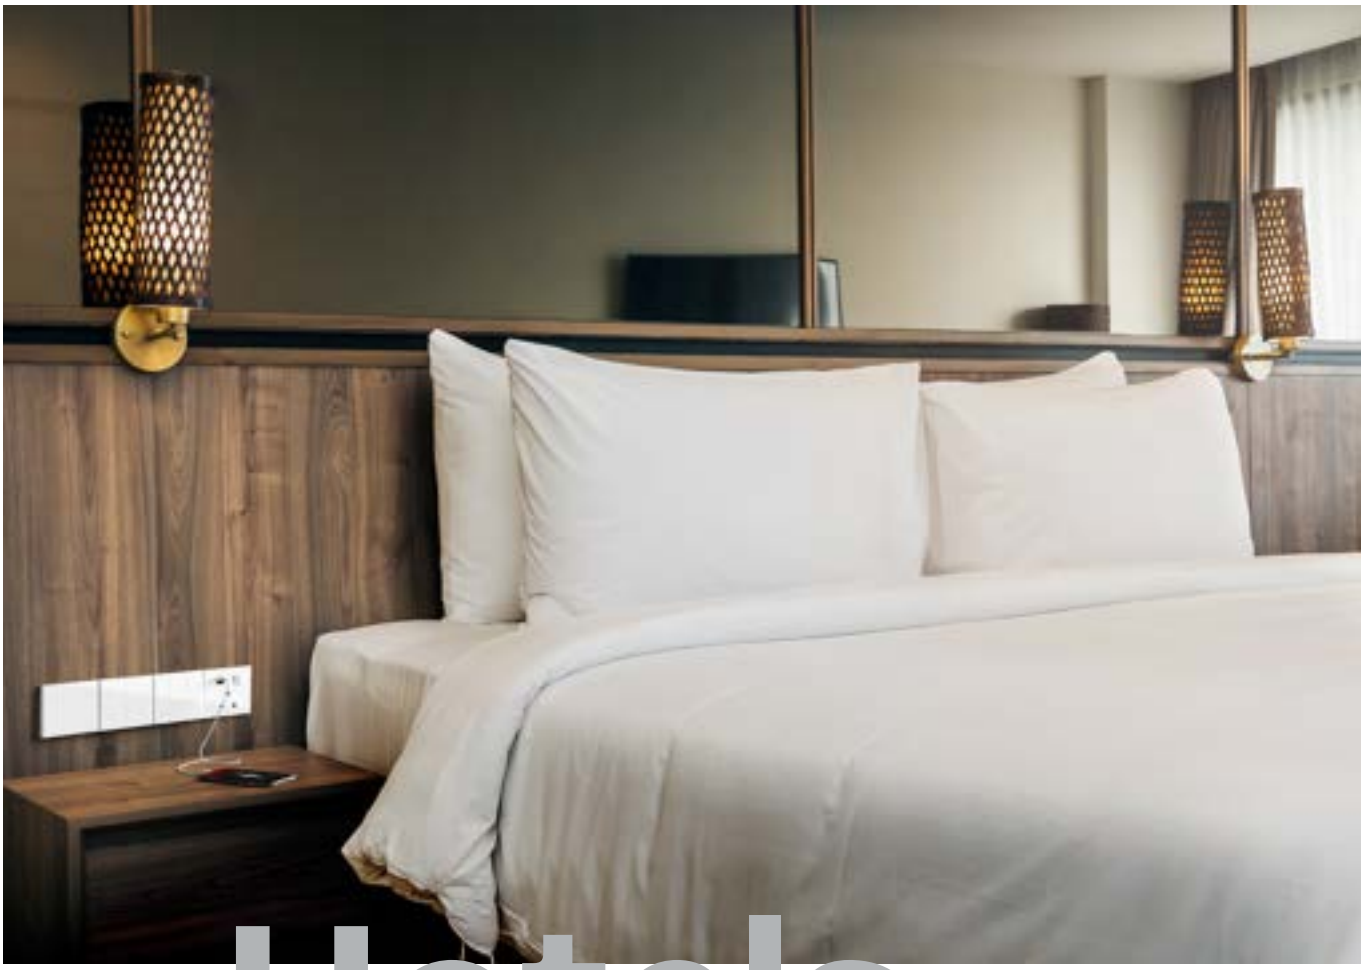

Hotels

Features & benefits

Comprehensive functionality, meeting diverse need



Excellent performance for durability
High quality PC material with improved flame retardents and UV stabilisers used to reduce possibilities of deformation and colour change due to exposure to sunlight.

High quality copper and silver alloy materials for metal parts to optimize life cycle performance.

All LED light indicators combine the attribute of low electricity consumption.



Wide variety of socket outlets
All sockets are equipped with shutters for increased safety. Switched and unswitched versions with and without LED indicator. 13A and 15A British standard, Multi-functional, Schuko and Euro American socket outlets.

USB Type-A+C integrated into BS and Multi-functional sockets, as well as the individual USB charger max output up to 65W.

Hospitality functions
Offers a wide range of products such as shaver socket outlet, electronic key card switch with time delay, bell switch (both indoor and outdoor) with "Do Not Disturb", "Make Up Room" with and indicators.

Safety first
Protecting every moment

The Framia series is British standard-certified, made with high-quality plastics copper and silver alloy materials, ensuring safety and reliability with every use. The 16 AX switch ratings suitable for LED loads.

Easy installation
Saving time and effort

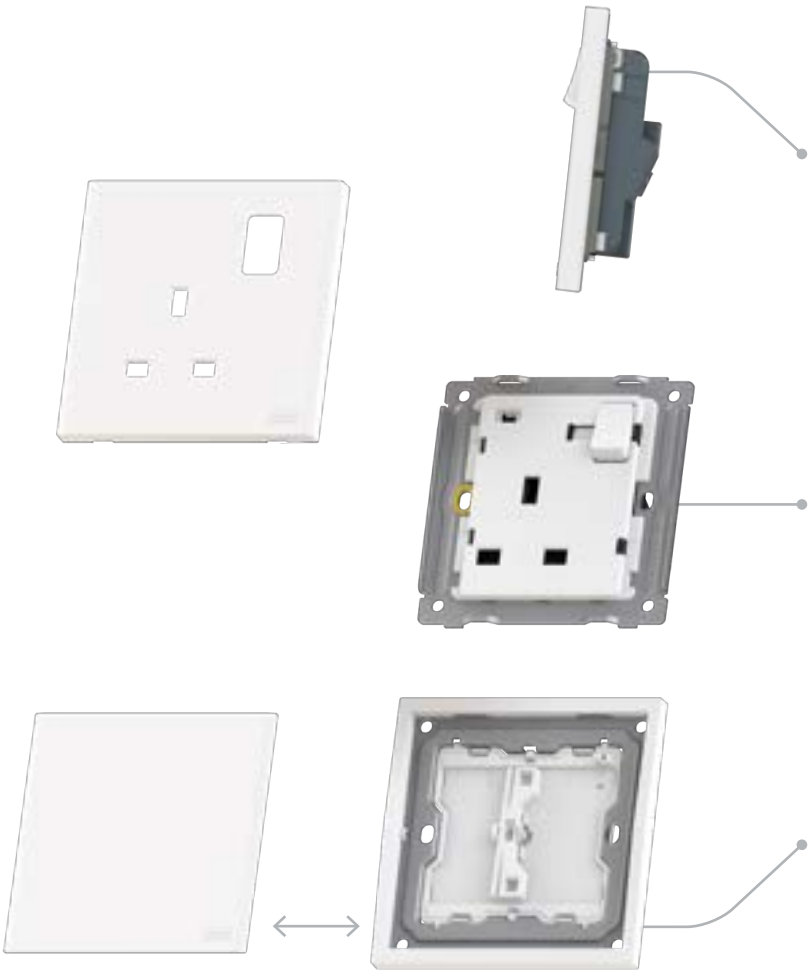

–
The limited insertion depth of the mounting box saves space and improves installation efficiency.

–
The 1.2 mm resin coated metal mounting plate enhances installation stability.

–
Framia make your installation easier, just remove the front cover with one step.

Framia
Switches

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang 1 Way switch, 16AX Rated voltage: 250V AC Rated current: 16AX		
White	BC127	2TCZ211001R0060	1
Matt white	BC127-WM	2TCZ211001R3960	1
Space grey	BC127-SG	2TCZ211001R6360	1
Matt black	BC127-MB	2TCZ211001R4460	1
Champagne gold	BC127-CH	2TCZ211001R4160	1
	2 Gang 1 Way switch, 16AX Rated voltage: 250V AC Rated current: 16AX		
White	BC122	2TCZ211002R0060	1
Matt white	BC122-WM	2TCZ211002R3960	1
Space grey	BC122-SG	2TCZ211002R6360	1
Matt black	BC122-MB	2TCZ211002R4460	1
Champagne gold	BC122-CH	2TCZ211002R4160	1
	3 Gang 1 Way switch, 16AX Rated voltage: 250V AC Rated current: 16AX		
White	BC123	2TCZ211003R0060	1
Matt white	BC123-WM	2TCZ211003R3960	1
Space grey	BC123-SG	2TCZ211003R6360	1
Matt black	BC123-MB	2TCZ211003R4460	1
Champagne gold	BC123-CH	2TCZ211003R4160	1
	4 Gang 1 Way switch, 16AX Rated voltage: 250V AC Rated current: 16AX		
White	BC124	2TCZ211004R0060	1
Matt white	BC124-WM	2TCZ211004R3960	1
Space grey	BC124-SG	2TCZ211004R6360	1
Matt black	BC124-MB	2TCZ211004R4460	1
Champagne gold	BC124-CH	2TCZ211004R4160	1

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang 2 Way switch, 16AX Rated voltage: 250V AC Rated current: 16AX		
White	BC125	2TCZ211005R0060	1
Matt white	BC125-WM	2TCZ211005R3960	1
Space grey	BC125-SG	2TCZ211005R6360	1
Matt black	BC125-MB	2TCZ211005R4460	1
Champagne gold	BC125-CH	2TCZ211005R4160	1
	2 Gang 2 Way switch, 16AX Rated voltage: 250V AC Rated current: 16AX		
White	BC126	2TCZ211006R0060	1
Matt white	BC126-WM	2TCZ211006R3960	1
Space grey	BC126-SG	2TCZ211006R6360	1
Matt black	BC126-MB	2TCZ211006R4460	1
Champagne gold	BC126-CH	2TCZ211006R4160	1
	3 Gang 2 Way switch, 16AX Rated voltage: 250V AC Rated current: 16AX		
White	BC121	2TCZ211007R0060	1
Matt white	BC121-WM	2TCZ211007R3960	1
Space grey	BC121-SG	2TCZ211007R6360	1
Matt black	BC121-MB	2TCZ211007R4460	1
Champagne gold	BC121-CH	2TCZ211007R4160	1
	4 Gang 2 Way switch, 16AX Rated voltage: 250V AC Rated current: 16AX		
White	BC141	2TCZ211008R0060	1
Matt white	BC141-WM	2TCZ211008R3960	1
Space grey	BC141-SG	2TCZ211008R6360	1
Matt black	BC141-MB	2TCZ211008R4460	1
Champagne gold	BC141-CH	2TCZ211008R4160	1

Framia
Switches

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang 1 Way switch, 20AX Rated voltage: 250V AC Rated current: 20AX		
White	BC110	2TCZ211010R0070	1
Matt white	BC110-WM	2TCZ211010R3970	1
Space grey	BC110-SG	2TCZ211010R6370	1
Matt black	BC110-MB	2TCZ211010R4470	1
Champagne gold	BC110-CH	2TCZ211010R4170	1
	2 Gang 1 Way switch, 20AX Rated voltage: 250V AC Rated current: 20AX		
White	BC114	2TCZ211012R0070	1
Matt white	BC114-WM	2TCZ211012R3970	1
Space grey	BC114-SG	2TCZ211012R6370	1
Matt black	BC114-MB	2TCZ211012R4470	1
Champagne gold	BC114-CH	2TCZ211012R4170	1
	1 Gang 1 Way DP witch, 20AX Rated voltage: 250V AC Rated current: 20AX Marked "ON"		
White	BC111	2TCZ211014R0070	1
Matt white	BC111-WM	2TCZ211014R3970	1
Space grey	BC111-SG	2TCZ211014R6370	1
Matt black	BC111-MB	2TCZ211014R4470	1
Champagne gold	BC111-CH	2TCZ211014R4170	1
	1 Gang 1 Way DP switch with LED, 20AX Rated voltage: 250V AC Rated current: 20AX LED indicator Marked "ON"		
White	BC171	2TCZ211015R0070	1
Matt white	BC171-WM	2TCZ211015R3970	1
Space grey	BC171-SG	2TCZ211015R6370	1
Matt black	BC171-MB	2TCZ211015R4470	1
Champagne gold	BC171-CH	2TCZ211015R4170	1

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang 2 Way switch, 20AX Rated voltage: 250V AC Rated current: 20AX		
White	BC112	2TCZ211011R0070	1
Matt white	BC112-WM	2TCZ211011R3970	1
Space grey	BC112-SG	2TCZ211011R6370	1
Matt black	BC112-MB	2TCZ211011R4470	1
Champagne gold	BC112-CH	2TCZ211011R4170	1
	2 Gang 2 Way switch, 20AX Rated voltage: 250V AC Rated current: 20AX		
White	BC115	2TCZ211013R0070	1
Matt white	BC115-WM	2TCZ211013R3970	1
Space grey	BC115-SG	2TCZ211013R6370	1
Matt black	BC115-MB	2TCZ211013R4470	1
Champagne gold	BC115-CH	2TCZ211013R4170	1
	2 Gang 1 Way DP witch, 20AX Rated voltage: 250V AC Rated current: 20AX Marked "ON"		
White	BC113	2TCZ211028R0070	1
Matt white	BC113-WM	2TCZ211028R3970	1
Space grey	BC113-SG	2TCZ211028R6370	1
Matt black	BC113-MB	2TCZ211028R4470	1
Champagne gold	BC113-CH	2TCZ211028R4170	1
	2 Gang 1 Way DP switch with LED, 20AX Rated voltage: 250V AC Rated current: 20AX LED indicator Marked "ON"		
White	BC178	2TCZ211029R0070	1
Matt white	BC178-WM	2TCZ211029R3970	1
Space grey	BC178-SG	2TCZ211029R6370	1
Matt black	BC178-MB	2TCZ211029R4470	1
Champagne gold	BC178-CH	2TCZ211029R4170	1

Framia
Switches

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang 1 Way DP switch with LED, marked "Waterheater", 20AX Rated voltage: 250V AC Rated current: 20AX LED indicator Marked "ON" & "Waterheater"		
White	BC171WH	2TCZ211016R0070	1
Matt white	BC171WH-WM	2TCZ211016R3970	1
Space grey	BC171WH-SG	2TCZ211016R6370	1
Matt black	BC171WH-MB	2TCZ211016R4470	1
Champagne gold	BC171WH-CH	2TCZ211016R4170	1
	1 Gang 1 Way DP switch with LED, 32A Rated voltage: 250V AC Rated current: 32A LED indicator		
White	BC176	2TCZ211018R0090	1
Matt white	BC176-WM	2TCZ211018R3990	1
Space grey	BC176-SG	2TCZ211018R6390	1
Matt black	BC176-MB	2TCZ211018R4490	1
Champagne gold	BC176-CH	2TCZ211018R4190	1
	1 Gang 1 Way DP switch with LED, 32A Rated voltage: 250V AC Rated current: 32A LED indicator		
White	BC176W	2TCZ211018R0091	1
Matt white	BC176W-WM	2TCZ211018R3991	1
Space grey	BC176W-SG	2TCZ211018R6391	1
Matt black	BC176W-MB	2TCZ211018R4491	1
Champagne gold	BC176W-CH	2TCZ211018R4191	1
	1 Gang 1 Way push switch, 10A Rated voltage: 250V AC Rated current: 10A		
White	BC430	2TCZ211021R0030	1
Matt white	BC430-WM	2TCZ211021R3930	1
Space grey	BC430-SG	2TCZ211021R6330	1
Matt black	BC430-MB	2TCZ211021R4430	1
Champagne gold	BC430-CH	2TCZ211021R4130	1

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang 2 Way DP switch with LED, marked "Waterheater", 20AX Rated voltage: 250V AC Rated current: 20AX LED indicator Marked "ON" & "Waterheater"		
White	BC180	2TCZ211017R0070	1
Matt white	BC180-WM	2TCZ211017R3970	1
Space grey	BC180-SG	2TCZ211017R6370	1
Matt black	BC180-MB	2TCZ211017R4470	1
Champagne gold	BC180-CH	2TCZ211017R4170	1
	1 Gang 1 Way DP switch with LED, 45A Rated voltage: 250V AC Rated current: 45A LED indicator		
White	BC177	2TCZ211019R0090	1
Matt white	BC177-WM	2TCZ211019R3990	1
Space grey	BC177-SG	2TCZ211019R6390	1
Matt black	BC177-MB	2TCZ211019R4490	1
Champagne gold	BC177-CH	2TCZ211019R4190	1
	1 Gang 1 Way DP switch with LED, 45A Rated voltage: 250V AC Rated current: 45A LED indicator		
White	BC177W	2TCZ211019R0091	1
Matt white	BC177W-WM	2TCZ211019R3991	1
Space grey	BC177W-SG	2TCZ211019R6391	1
Matt black	BC177W-MB	2TCZ211019R4491	1
Champagne gold	BC177W-CH	2TCZ211019R4191	1
	1 Gang 2 Way push switch, 10A Rated voltage: 250V AC Rated current: 10A		
White	BC456	2TCZ211022R0030	1
Matt white	BC456-WM	2TCZ211022R3930	1
Space grey	BC456-SG	2TCZ211022R6330	1
Matt black	BC456-MB	2TCZ211022R4430	1
Champagne gold	BC456-CH	2TCZ211022R4130	1

Framia
Switches

Product	Article-No.	Order-No.	Pack/Qty
	2 Gang 1 Way push switch, 10A Rated voltage: 250V AC Rated current: 10A		
White	BC438	2TCZ211023R0030	1
Matt white	BC438-WM	2TCZ211023R3930	1
Space grey	BC438-SG	2TCZ211023R6330	1
Matt black	BC438-MB	2TCZ211023R4430	1
Champagne gold	BC438-CH	2TCZ211023R4130	1
	Push switch with bell symbol, 10A Rated voltage: 250V AC Rated current: 10A Bell symbol		
White	BC429	2TCZ211020R0030	1
Matt white	BC429-WM	2TCZ211020R3930	1
Space grey	BC429-SG	2TCZ211020R6330	1
Matt black	BC429-MB	2TCZ211020R4430	1
Champagne gold	BC429-CH	2TCZ211020R4130	1
	Intermediate switch, 16AX Rated voltage: 250V AC Rated current: 16AX		
White	BC150	2TCZ211009R0060	1
Matt white	BC150-WM	2TCZ211009R3960	1
Space grey	BC150-SG	2TCZ211009R6360	1
Matt black	BC150-MB	2TCZ211009R4460	1
Champagne gold	BC150-CH	2TCZ211009R4160	1
	4 Gang 2 Way switch in 6x3 Size, 16AX Rated voltage: 250V AC Rated current: 16AX Size: in 6x3		
White	BC191	2TCZ211026R0060	1
Matt white	BC191-WM	2TCZ211026R3960	1
Space grey	BC191-SG	2TCZ211026R6360	1
Matt black	BC191-MB	2TCZ211026R4460	1
Champagne gold	BC191-CH	2TCZ211026R4160	1

Product	Article-No.	Order-No.	Pack/Qty
	3 Gang 1 Way push switch, 10A Rated voltage: 250V AC Rated current: 10A		
White	BC439	2TCZ211030R0030	1
Matt white	BC439-WM	2TCZ211030R3930	1
Space grey	BC439-SG	2TCZ211030R6330	1
Matt black	BC439-MB	2TCZ211030R4430	1
Champagne gold	BC439-CH	2TCZ211030R4130	1
	Switch blind control Rated voltage: 250V AC Rated current: 10A		
White	BC149	2TCZ211024R0030	1
Matt white	BC149-WM	2TCZ211024R3930	1
Space grey	BC149-SG	2TCZ211024R6330	1
Matt black	BC149-MB	2TCZ211024R4430	1
Champagne gold	BC149-CH	2TCZ211024R4130	1
	2 Gang 1 Way DP 45A switch& **13A switched socket outlet with LED** Rated voltage: 250V AC Rated current (socket): 13A Rated current (switch): 45A LED indicator		
White	BC118	2TCZ211025R0090	1
Matt white	BC118-WM	2TCZ211025R3990	1
Space grey	BC118-SG	2TCZ211025R6390	1
Matt black	BC118-MB	2TCZ211025R4490	1
Champagne gold	BC118-CH	2TCZ211025R4190	1
	6 Gang 2 Way switch in 6x3 Size, 16AX Rated voltage: 250V AC Rated current: 16AX Size: in 6x3		
White	BC198	2TCZ211027R0060	1
Matt white	BC198-WM	2TCZ211027R3960	1
Space grey	BC198-SG	2TCZ211027R6360	1
Matt black	BC198-MB	2TCZ211027R4460	1
Champagne gold	BC198-CH	2TCZ211027R4160	1

Framia

Socket outlets

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang unswitched socket outlet, 13A Rated voltage: 250V AC Rated current: 13A Includes child safety shutter		
White	BC208	2TCZ212001R0040	1
Matt white	BC208-WM	2TCZ212001R3940	1
Space grey	BC208-SG	2TCZ212001R6340	1
Matt black	BC208-MB	2TCZ212001R4440	1
Champagne gold	BC208-CH	2TCZ212001R4140	1
	1 Gang SP switched socket outlet, 13A Rated voltage: 250V AC Rated current: 13A Single pole switch Includes child safety shutter		
White	BC224	2TCZ212002R0040	1
Matt white	BC224-WM	2TCZ212002R3940	1
Space grey	BC224-SG	2TCZ212002R6340	1
Matt black	BC224-MB	2TCZ212002R4440	1
Champagne gold	BC224-CH	2TCZ212002R4140	1
	1 Gang SP switched socket outlet with LED, 13A Rated voltage: 250V AC Rated current: 13A Single pole switch LED indicator Includes child safety shutter		
White	BC229	2TCZ212003R0040	1
Matt white	BC229-WM	2TCZ212003R3940	1
Space grey	BC229-SG	2TCZ212003R6340	1
Matt black	BC229-MB	2TCZ212003R4440	1
Champagne gold	BC229-CH	2TCZ212003R4140	1
	1 Gang DP switched socket outlet, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch Includes child safety shutter		
White	BC237	2TCZ212004R0040	1
Matt white	BC237-WM	2TCZ212004R3940	1
Space grey	BC237-SG	2TCZ212004R6340	1
Matt black	BC237-MB	2TCZ212004R4440	1
Champagne gold	BC237-CH	2TCZ212004R4140	1

Product	Article-No.	Order-No.	Pack/Qty
	2 Gang unswitched socket outlet, 13A Rated voltage: 250V AC Rated current: 13A Includes child safety shutter		
White	BC260	2TCZ212006R0040	1
Matt white	BC260-WM	2TCZ212006R3940	1
Space grey	BC260-SG	2TCZ212006R6340	1
Matt black	BC260-MB	2TCZ212006R4440	1
Champagne gold	BC260-CH	2TCZ212006R4140	1
	2 Gang SP switched socket outlet, 13A Rated voltage: 250V AC Rated current: 13A Single pole switch Includes child safety shutter		
White	BC227	2TCZ212007R0040	1
Matt white	BC227-WM	2TCZ212007R3940	1
Space grey	BC227-SG	2TCZ212007R6340	1
Matt black	BC227-MB	2TCZ212007R4440	1
Champagne gold	BC227-CH	2TCZ212007R4140	1
	2 Gang SP switched socket outlet with LED, 13A Rated voltage: 250V AC Rated current: 13A Single pole switch LED indicator Includes child safety shutter		
White	BC200	2TCZ212008R0040	1
Matt white	BC200-WM	2TCZ212008R3940	1
Space grey	BC200-SG	2TCZ212008R6340	1
Matt black	BC200-MB	2TCZ212008R4440	1
Champagne gold	BC200-CH	2TCZ212008R4140	1
	2 Gang DP switched socket outlet, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch Includes child safety shutter		
White	BC239	2TCZ212009R0040	1
Matt white	BC239-WM	2TCZ212009R3940	1
Space grey	BC239-SG	2TCZ212009R6340	1
Matt black	BC239-MB	2TCZ212009R4440	1
Champagne gold	BC239-CH	2TCZ212009R4140	1

Framia

Socket outlets

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang DP switched socket outlet with LED, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch LED indicator Includes child safety shutter		
White	BC238	2TCZ212005R0040	1
Matt white	BC238-WM	2TCZ212005R3940	1
Space grey	BC238-SG	2TCZ212005R6340	1
Matt black	BC238-MB	2TCZ212005R4440	1
Champagne gold	BC238-CH	2TCZ212005R4140	1
	1 Gang DP switched socket outlet with USB Type A+C, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch USB-C: 20W Max. USB-A: 18W Max. USB-A+C: 15W Max. Includes child safety shutter		
White	BC247	2TCZ212011R0040	1
Matt white	BC247-WM	2TCZ212011R3940	1
Space grey	BC247-SG	2TCZ212011R6340	1
Matt black	BC247-MB	2TCZ212011R4440	1
Champagne gold	BC247-CH	2TCZ212011R4140	1
	1 Gang switched Multi- Socket Outlet, 16A Rated voltage: 250V AC Rated current: 16A Single pole switch Includes child safety shutter		
White	BC294	2TCZ212013R0060	1
Matt white	BC294-WM	2TCZ212013R3960	1
Space grey	BC294-SG	2TCZ212013R6360	1
Matt black	BC294-MB	2TCZ212013R4460	1
Champagne gold	BC294-CH	2TCZ212013R4160	1
	1 Gang switched Multi- Socket Outlet with USB Type A+C, 16A Rated voltage: 250V AC Rated current: 16A Single pole switch USB-C: 20W Max. USB-A: 18W Max. USB-A+C: 15W Max. Includes child safety shutter		
White	BC251	2TCZ212014R0060	1
Matt white	BC251-WM	2TCZ212014R3960	1
Space grey	BC251-SG	2TCZ212014R6360	1
Matt black	BC251-MB	2TCZ212014R4460	1
Champagne gold	BC251-CH	2TCZ212014R4160	1

Product	Article-No.	Order-No.	Pack/Qty
	2 Gang DP switched socket outlet with LED, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch LED indicator Includes child safety shutter		
White	BC240	2TCZ212010R0040	1
Matt white	BC240-WM	2TCZ212010R3940	1
Space grey	BC240-SG	2TCZ212010R6340	1
Matt black	BC240-MB	2TCZ212010R4440	1
Champagne gold	BC240-CH	2TCZ212010R4140	1
	2 Gang DP switched socket outlet with USB Type A+C, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch USB-C: 20W Max. USB-A: 18W Max. USB-A+C: 15W Max. Includes child safety shutter		
White	BC248	2TCZ212012R0040	1
Matt white	BC248-WM	2TCZ212012R3940	1
Space grey	BC248-SG	2TCZ212012R6340	1
Matt black	BC248-MB	2TCZ212012R4440	1
Champagne gold	BC248-CH	2TCZ212012R4140	1
	2 Gang switched Multi- Socket Outlet, 16A Rated voltage: 250V AC Rated current: 16A Single pole switch Includes child safety shutter		
White	BC253	2TCZ212023R0060	1
Matt white	BC253-WM	2TCZ212023R3960	1
Space grey	BC253-SG	2TCZ212023R6360	1
Matt black	BC253-MB	2TCZ212023R4460	1
Champagne gold	BC253-CH	2TCZ212023R4160	1
	2 Gang switched Multi- Socket Outlet with USB Type A+C, 16A Rated voltage: 250V AC Rated current: 16A Single pole switch USB-C: 20W Max. USB-A: 18W Max. USB-A+C: 15W Max. Includes child safety shutter		
White	BC250	2TCZ212015R0060	1
Matt white	BC250-WM	2TCZ212015R3960	1
Space grey	BC250-SG	2TCZ212015R6360	1
Matt black	BC250-MB	2TCZ212015R4460	1
Champagne gold	BC250-CH	2TCZ212015R4160	1

Framia

Socket outlets

Product	Article-No.	Order-No.	Pack/Qty
	USB charger, Type A+C USB-C: 65W Max. USB-A: 45W Max. USB-A+C: 10W+45W Max.		
White	BC249	2TCZ212016R0010	1
Matt white	BC249-WM	2TCZ212016R3910	1
Space grey	BC249-SG	2TCZ212016R6310	1
Matt black	BC249-MB	2TCZ212016R4410	1
Champagne gold	BC249-CH	2TCZ212016R4110	1
	1 Gang round pin switched socket outlet, 15A Rated voltage: 250V AC Rated current: 15A Single pole switch Includes child safety shutter		
White	BC209	2TCZ212018R0050	1
Matt white	BC209-WM	2TCZ212018R3950	1
Space grey	BC209-SG	2TCZ212018R6350	1
Matt black	BC209-MB	2TCZ212018R4450	1
Champagne gold	BC209-CH	2TCZ212018R4150	1
	**1 Gang Euro-American socket outlet with earth, 16A** Rated voltage: 250V AC Rated current: 16A Includes child safety shutter		
White	BC244	2TCZ212021R0060	1
Matt white	BC244-WM	2TCZ212021R3960	1
Space grey	BC244-SG	2TCZ212021R6360	1
Matt black	BC244-MB	2TCZ212021R4460	1
Champagne gold	BC244-CH	2TCZ212021R4160	1
	1 Gang Schuko socket, 16A Rated voltage: 250V AC Rated current: 16A Includes child safety shutter		
White	BC296	2TCZ212019R0060	1
Matt white	BC296-WM	2TCZ212019R3960	1
Space grey	BC296-SG	2TCZ212019R6360	1
Matt black	BC296-MB	2TCZ212019R4460	1
Champagne gold	BC296-CH	2TCZ212019R4160	1

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang round pin switched socket outlet, 5A Rated voltage: 250V AC Rated current: 5A Single pole switch Includes child safety shutter		
White	BC252	2TCZ212017R0020	1
Matt white	BC252-WM	2TCZ212017R3920	1
Space grey	BC252-SG	2TCZ212017R6320	1
Matt black	BC252-MB	2TCZ212017R4420	1
Champagne gold	BC252-CH	2TCZ212017R4120	1
	2 Gang Euro-American switched socket outlet, 10A Rated voltage: 250V AC Rated current: 10A Single pole switch Includes child safety shutter		
White	BC222	2TCZ212020R0030	1
Matt white	BC222-WM	2TCZ212020R3930	1
Space grey	BC222-SG	2TCZ212020R6330	1
Matt black	BC222-MB	2TCZ212020R4430	1
Champagne gold	BC222-CH	2TCZ212020R4130	1
	**2 Gang Euro-American socket outlet with earth, 16A** Rated voltage: 250V AC Rated current: 16A Includes child safety shutter		
White	BC245	2TCZ212022R0060	1
Matt white	BC245-WM	2TCZ212022R3960	1
Space grey	BC245-SG	2TCZ212022R6360	1
Matt black	BC245-MB	2TCZ212022R4460	1
Champagne gold	BC245-CH	2TCZ212022R4160	1

Framia

Socket outlets

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang SP switched socket outlet with big rocker, 13A Rated voltage: 250V AC Rated current: 13A Single pole switch Includes child safety shutter		
White	BC254	2TCZ212024R0040	1
Matt white	BC254-WM	2TCZ212024R3940	1
Space grey	BC254-SG	2TCZ212024R6340	1
Matt black	BC254-MB	2TCZ212024R4440	1
Champagne gold	BC254-CH	2TCZ212024R4140	1
	1 Gang DP switched socket outlet with big rocker, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch Includes child safety shutter		
White	BC256	2TCZ212026R0040	1
Matt white	BC256-WM	2TCZ212026R3940	1
Space grey	BC256-SG	2TCZ212026R6340	1
Matt black	BC256-MB	2TCZ212026R4440	1
Champagne gold	BC256-CH	2TCZ212026R4140	1
	2 Gang SP switched socket outlet with big rocker, 13A Rated voltage: 250V AC Rated current: 13A Single pole switch Includes child safety shutter		
White	BC258	2TCZ212028R0040	1
Matt white	BC258-WM	2TCZ212028R3940	1
Space grey	BC258-SG	2TCZ212028R6340	1
Matt black	BC258-MB	2TCZ212028R4440	1
Champagne gold	BC258-CH	2TCZ212028R4140	1
	2 Gang DP switched socket outlet with big rocker, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch Includes child safety shutter		
White	BC268	2TCZ212030R0040	1
Matt white	BC268-WM	2TCZ212030R3940	1
Space grey	BC268-SG	2TCZ212030R6340	1
Matt black	BC268-MB	2TCZ212030R4440	1
Champagne gold	BC268-CH	2TCZ212030R4140	1

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang SP switched socket outlet with LED & big rocker , 13A Rated voltage: 250V AC Rated current: 13A Single pole switch LED indicator Includes child safety shutter		
White	BC255	2TCZ212025R0040	1
Matt white	BC255-WM	2TCZ212025R3940	1
Space grey	BC255-SG	2TCZ212025R6340	1
Matt black	BC255-MB	2TCZ212025R4440	1
Champagne gold	BC255-CH	2TCZ212025R4140	1
	1 Gang DP switched socket outlet with LED & big rocker, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch LED indicator Includes child safety shutter		
White	BC257	2TCZ212027R0040	1
Matt white	BC257-WM	2TCZ212027R3940	1
Space grey	BC257-SG	2TCZ212027R6340	1
Matt black	BC257-MB	2TCZ212027R4440	1
Champagne gold	BC257-CH	2TCZ212027R4140	1
	2 Gang SP switched socket outlet with LED & big rocker , 13A Rated voltage: 250V AC Rated current: 13A Single pole switch LED indicator Includes child safety shutter		
White	BC259	2TCZ212029R0040	1
Matt white	BC259-WM	2TCZ212029R3940	1
Space grey	BC259-SG	2TCZ212029R6340	1
Matt black	BC259-MB	2TCZ212029R4440	1
Champagne gold	BC259-CH	2TCZ212029R4140	1
	2 Gang DP switched socket outlet with LED & big rocker , 13A Rated voltage: 250V AC Rated current: 13A Double pole switch LED indicator Includes child safety shutter		
White	BC269	2TCZ212031R0040	1
Matt white	BC269-WM	2TCZ212031R3940	1
Space grey	BC269-SG	2TCZ212031R6340	1
Matt black	BC269-MB	2TCZ212031R4440	1
Champagne gold	BC269-CH	2TCZ212031R4140	1

Framia

Socket outlets

Product	Article-No.	Order-No.	Pack/Qty
	1Gang DP switched socket outlet with USB Type A+C & big rocker, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch USB-C: 20W Max. USB-A: 18W Max. USB-A+C: 15W Max. Includes child safety shutter		
White	BC270	2TCZ212032R0040	1
Matt white	BC270-WM	2TCZ212032R3940	1
Space grey	BC270-SG	2TCZ212032R6340	1
Matt black	BC270-MB	2TCZ212032R4440	1
Champagne gold	BC270-CH	2TCZ212032R4140	1
	1Gang DP switched socket outlet with USB Type A+C & big rocker, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch USB-C: 20W Max. USB-A: 18W Max. USB-A+C: 15W Max. Includes child safety shutter Additional micro-switch used for Insulation Resistance Test		
White	BC272	2TCZ212034R0040	1
Matt white	BC272-WM	2TCZ212034R3940	1
Space grey	BC272-SG	2TCZ212034R6340	1
Matt black	BC272-MB	2TCZ212034R4440	1
Champagne gold	BC272-CH	2TCZ212034R4140	1

Product	Article-No.	Order-No.	Pack/Qty
	2Gang DP switched socket outlet with USB Type A+C & big rocker, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch USB-C: 20W Max. USB-A: 18W Max. USB-A+C: 15W Max. Includes child safety shutter		
White	BC271	2TCZ212033R0040	1
Matt white	BC271-WM	2TCZ212033R3940	1
Space grey	BC271-SG	2TCZ212033R6340	1
Matt black	BC271-MB	2TCZ212033R4440	1
Champagne gold	BC271-CH	2TCZ212033R4140	1
	2Gang DP switched socket outlet with USB Type A+C & big rocker, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch USB-C: 20W Max. USB-A: 18W Max. USB-A+C: 15W Max. Includes child safety shutter Additional micro-switch used for Insulation Resistance Test		
White	BC273	2TCZ212035R0040	1
Matt white	BC273-WM	2TCZ212035R3940	1
Space grey	BC273-SG	2TCZ212035R6340	1
Matt black	BC273-MB	2TCZ212035R4440	1
Champagne gold	BC273-CH	2TCZ212035R4140	1

Framia

Data outlets

Product	Article-No.	Order-No.	Pack/Qty
	1Gang TV outlet Dead-end feeder Frequency range: 5-1000MHz		
White	BC301	2TCZ213001R0010	1
Matt white	BC301-WM	2TCZ213001R3910	1
Space grey	BC301-SG	2TCZ213001R6310	1
Matt black	BC301-MB	2TCZ213001R4410	1
Champagne gold	BC301-CH	2TCZ213001R4110	1
	2 Gang TV & FM outlet Dead-end feeder Frequency range: 5-1000MHz		
White	BC312	2TCZ213004R0010	1
Matt white	BC312-WM	2TCZ213004R3910	1
Space grey	BC312-SG	2TCZ213004R6310	1
Matt black	BC312-MB	2TCZ213004R4410	1
Champagne gold	BC312-CH	2TCZ213004R4110	1
	1 Gang Telephone outlet RJ11 type connection 4-pole UTP		
White	BC321	2TCZ213005R0010	1
Matt white	BC321-WM	2TCZ213005R3910	1
Space grey	BC321-SG	2TCZ213005R6310	1
Matt black	BC321-MB	2TCZ213005R4410	1
Champagne gold	BC321-CH	2TCZ213005R4110	1
	2 Gang TV/Telephone outlet Frequency range: 5-1000MHz RJ11 type connection		
White	BC324	2TCZ213007R0010	1
Matt white	BC324-WM	2TCZ213007R3910	1
Space grey	BC324-SG	2TCZ213007R6310	1
Matt black	BC324-MB	2TCZ213007R4410	1
Champagne gold	BC324-CH	2TCZ213007R4110	1

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang SAT socket outlet F-Type, isolated Frequency range: 5-1000MHz		
White	BC309	2TCZ213002R0010	1
Matt white	BC309-WM	2TCZ213002R3910	1
Space grey	BC309-SG	2TCZ213002R6310	1
Matt black	BC309-MB	2TCZ213002R4410	1
Champagne gold	BC309-CH	2TCZ213002R4110	1
	**3 Gang TV,SAT & FM outlet** Dead-end feeder Frequency range: 5-1000MHz F-Type, isolated		
White	BC313	2TCZ213003R0010	1
Matt white	BC313-WM	2TCZ213003R3910	1
Space grey	BC313-SG	2TCZ213003R6310	1
Matt black	BC313-MB	2TCZ213003R4410	1
Champagne gold	BC313-CH	2TCZ213003R4110	1
	2 Gang Telephone outlet RJ11 type connection 4-pole UTP		
White	BC322	2TCZ213006R0010	1
Matt white	BC322-WM	2TCZ213006R3910	1
Space grey	BC322-SG	2TCZ213006R6310	1
Matt black	BC322-MB	2TCZ213006R4410	1
Champagne gold	BC322-CH	2TCZ213006R4110	1
	2 Gang TV/Data outlet Frequency range: 5-1000MHz RJ45 Cat.5e 8-pole UTP		
White	BC325	2TCZ213008R0010	1
Matt white	BC325-WM	2TCZ213008R3910	1
Space grey	BC325-SG	2TCZ213008R6310	1
Matt black	BC325-MB	2TCZ213008R4410	1
Champagne gold	BC325-CH	2TCZ213008R4110	1

Framia

Data outlets

Product	Article-No.	Order-No.	Pack/Qty
	2 Gang Telephone & Data outlet RJ45 Cat.5e 8-pole UTP		
White	BC323	2TCZ213009R0010	1
Matt white	BC323-WM	2TCZ213009R3910	1
Space grey	BC323-SG	2TCZ213009R6310	1
Matt black	BC323-MB	2TCZ213009R4410	1
Champagne gold	BC323-CH	2TCZ213009R4110	1
	2 Gang Data outlet RJ45 Cat.5e 8-pole UTP		
White	BC332	2TCZ213011R0010	1
Matt white	BC332-WM	2TCZ213011R3910	1
Space grey	BC332-SG	2TCZ213011R6310	1
Matt black	BC332-MB	2TCZ213011R4410	1
Champagne gold	BC332-CH	2TCZ213011R4110	1
	2 Gang Data outlet RJ45 Cat.6 8-pole UTP		
White	BC329	2TCZ213013R0010	1
Matt white	BC329-WM	2TCZ213013R3910	1
Space grey	BC329-SG	2TCZ213013R6310	1
Matt black	BC329-MB	2TCZ213013R4410	1
Champagne gold	BC329-CH	2TCZ213013R4110	1
	2 Gang Data outlet RJ45 Cat.6a 8-pole UTP		
White	BC317	2TCZ213015R0010	1
Matt white	BC317-WM	2TCZ213015R3910	1
Space grey	BC317-SG	2TCZ213015R6310	1
Matt black	BC317-MB	2TCZ213015R4410	1
Champagne gold	BC317-CH	2TCZ213015R4110	1

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang Data outlet RJ45 Cat.5e 8-pole UTP		
White	BC331	2TCZ213010R0010	1
Matt white	BC331-WM	2TCZ213010R3910	1
Space grey	BC331-SG	2TCZ213010R6310	1
Matt black	BC331-MB	2TCZ213010R4410	1
Champagne gold	BC331-CH	2TCZ213010R4110	1
	1 Gang Data outlet RJ45 Cat.6 8-pole UTP		
White	BC333	2TCZ213012R0010	1
Matt white	BC333-WM	2TCZ213012R3910	1
Space grey	BC333-SG	2TCZ213012R6310	1
Matt black	BC333-MB	2TCZ213012R4410	1
Champagne gold	BC333-CH	2TCZ213012R4110	1
	1 Gang Data outlet RJ45 Cat.6a 8-pole UTP		
White	BC318	2TCZ213014R0010	1
Matt white	BC318-WM	2TCZ213014R3910	1
Space grey	BC318-SG	2TCZ213014R6310	1
Matt black	BC318-MB	2TCZ213014R4410	1
Champagne gold	BC318-CH	2TCZ213014R4110	1
	1 Gang Data outlet Housing		
White	BC331-H	2TCZ213016R0010	1
Matt white	BC331-H-WM	2TCZ213016R3910	1
Space grey	BC331-H-SG	2TCZ213016R6310	1
Matt black	BC331-H-MB	2TCZ213016R4410	1
Champagne gold	BC331-H-CH	2TCZ213016R4110	1

Framia

Data outlets

Product	**Article-No.**	Order-No.	Pack/Qty
	2 Gang Data outlet Housing		
White	BC332-H	2TCZ213017R0010	1
Matt white	BC332-H-WM	2TCZ213017R3910	1
Space grey	BC332-H-SG	2TCZ213017R6310	1
Matt black	BC332-H-MB	2TCZ213017R4410	1
Champagne gold	BC332-H-CH	2TCZ213017R4110	1

Framia

Function control

Product	Article-No.	Order-No.	Pack/Qty
	Shaver socket outlet Input: 230V, 50Hz/60Hz Output: 115V/230V, 20VA		
White	BC401	2TCZ214001R0010	1
Matt white	BC401-WM	2TCZ214001R3910	1
Space grey	BC401-SG	2TCZ214001R6310	1
Matt black	BC401-MB	2TCZ214001R4410	1
Champagne gold	BC401-CH	2TCZ214001R4110	1
	Push button DND/MUR with bell symbol, 10A Rated voltage: 250V AC Rated current: 10A Includes red / green indication and bell sign		
White	BC403	2TCZ214003R0030	1
Matt white	BC403-WM	2TCZ214003R3930	1
Space grey	BC403-SG	2TCZ214003R6330	1
Matt black	BC403-MB	2TCZ214003R4430	1
Champagne gold	BC403-CH	2TCZ214003R4130	1
	LED dimmer Rated voltage: 220V-240V AC Frequency: 50-60Hz Load power range: 3-150VA µ Load type: - Adjustable LED - Incandescent lamp - 220V main halogen lamp		
White	BC405	2TCZ214006R0010	1
Matt white	BC405-WM	2TCZ214006R3910	1
Space grey	BC405-SG	2TCZ214006R6310	1
Matt black	BC405-MB	2TCZ214006R4410	1
Champagne gold	BC405-CH	2TCZ214006R4110	1
	Fan regulator Rated voltage: 220V AC Frequency: 50-60Hz Adjustment range: 500-25VA µ (from high to low)		
White	BC422	2TCZ214007R0010	1
Matt white	BC422-WM	2TCZ214007R3910	1
Space grey	BC422-SG	2TCZ214007R6310	1
Matt black	BC422-MB	2TCZ214007R4410	1
Champagne gold	BC422-CH	2TCZ214007R4110	1

Product	Article-No.	Order-No.	Pack/Qty
	Electronic Card switch, 16A Rated voltage: 250V AC Rated current: 16A Load compatibility: - Incandescent lamps: 4000W - Motors: 200VA - Fluorescent lamps: 200VA - Self-ballasted lamps: 100VA Time delay: 30s~45s Includes LED indicator		
White	BC402	2TCZ214002R0060	1
Matt white	BC402-WM	2TCZ214002R3960	1
Space grey	BC402-SG	2TCZ214002R6360	1
Matt black	BC402-MB	2TCZ214002R4460	1
Champagne gold	BC402-CH	2TCZ214002R4160	1
	2 Gang Switch DND/MUR with LED, 10A Rated voltage: 250V AC Rated current: 10A Interlocked gangs Includes red / green indication and bell sign		
White	BC493	2TCZ214004R0030	1
Matt white	BC493-WM	2TCZ214004R3930	1
Space grey	BC493-SG	2TCZ214004R6330	1
Matt black	BC493-MB	2TCZ214004R4430	1
Champagne gold	BC493-CH	2TCZ214004R4130	1
	Rotary dimmer Rated voltage: 220V AC Frequency: 50-60Hz Adjustment range: 25-500VA µ Load type: - Incandescent lamp - 220V main halogen lamp		
White	BC412	2TCZ214005R0010	1
Matt white	BC412-WM	2TCZ214005R3910	1
Space grey	BC412-SG	2TCZ214005R6310	1
Matt black	BC412-MB	2TCZ214005R4410	1
Champagne gold	BC412-CH	2TCZ214005R4110	1

Framia

FCU & Flex outlets

Product	Article-No.	Order-No.	Pack/Qty
	Fused connection unit, 13A Rated voltage: 250V AC Rated current: 13A		
White	BC506	2TCZ215001R0040	1
Matt white	BC506-WM	2TCZ215001R3940	1
Space grey	BC506-SG	2TCZ215001R6340	1
Matt black	BC506-MB	2TCZ215001R4440	1
Champagne gold	BC506-CH	2TCZ215001R4140	1
	Switched Fused connection unit, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch		
White	BC508	2TCZ215011R0040	1
Matt white	BC508-WM	2TCZ215011R3940	1
Space grey	BC508-SG	2TCZ215011R6340	1
Matt black	BC508-MB	2TCZ215011R4440	1
Champagne gold	BC508-CH	2TCZ215011R4140	1
	Flex outlet 25A Rated voltage: 250V AC Rated current: 25A		
White	BC589	2TCZ215004R0070	1
Matt white	BC589-WM	2TCZ215004R3970	1
Space grey	BC589-SG	2TCZ215004R6370	1
Matt black	BC589-MB	2TCZ215004R4470	1
Champagne gold	BC589-CH	2TCZ215004R4170	1

Product	Article-No.	Order-No.	Pack/Qty
	Switched Fused connection unit with LED, 13A Rated voltage: 250V AC Rated current: 13A Double pole switch LED indicator		
White	BC507	2TCZ215002R0040	1
Matt white	BC507-WM	2TCZ215002R3940	1
Space grey	BC507-SG	2TCZ215002R6340	1
Matt black	BC507-MB	2TCZ215002R4440	1
Champagne gold	BC507-CH	2TCZ215002R4140	1
	Fused connection unit with LED, 13A Rated voltage: 250V AC Rated current: 13A LED indicator		
White	BC577	2TCZ215003R0040	1
Matt white	BC577-WM	2TCZ215003R3940	1
Space grey	BC577-SG	2TCZ215003R6340	1
Matt black	BC577-MB	2TCZ215003R4440	1
Champagne gold	BC577-CH	2TCZ215003R4140	1
	Flex Outlet 45A Rated voltage: 250V AC Rated current: 45A		
White	BC590	2TCZ215005R0090	1
Matt white	BC590-WM	2TCZ215005R3990	1
Space grey	BC590-SG	2TCZ215005R6390	1
Matt black	BC590-MB	2TCZ215005R4490	1
Champagne gold	BC590-CH	2TCZ215005R4190	1

Framia

Accessories

Product	Article-No.	Order-No.	Pack/Qty
	1 Gang Blank Plate		
White	BC504	2TCZ215006R0010	1
Matt white	BC504-WM	2TCZ215006R3910	1
Space grey	BC504-SG	2TCZ215006R6310	1
Matt black	BC504-MB	2TCZ215006R4410	1
Champagne gold	BC504-CH	2TCZ215006R4110	1
	2 Gang frame		
White	BC621	2TCZ215008R0010	1
Matt white	BC621-WM	2TCZ215008R3910	1
Space grey	BC621-SG	2TCZ215008R6310	1
Matt black	BC621-MB	2TCZ215008R4410	1
Champagne gold	BC621-CH	2TCZ215008R4110	1
	4 Gang frame		
White	BC641	2TCZ215010R0010	1
Matt white	BC641-WM	2TCZ215010R3910	1
Space grey	BC641-SG	2TCZ215010R6310	1
Matt black	BC641-MB	2TCZ215010R4410	1
Champagne gold	BC641-CH	2TCZ215010R4110	1

Product	Article-No.	Order-No.	Pack/Qty
	**2 Gang Blank Plate**		
White	BC505	2TCZ215007R0010	1
Matt white	BC505-WM	2TCZ215007R3910	1
Space grey	BC505-SG	2TCZ215007R6310	1
Matt black	BC505-MB	2TCZ215007R4410	1
Champagne gold	BC505-CH	2TCZ215007R4110	1
	3 Gang frame		
White	BC631	2TCZ215009R0010	1
Matt white	BC631-WM	2TCZ215009R3910	1
Space grey	BC631-SG	2TCZ215009R6310	1
Matt black	BC631-MB	2TCZ215009R4410	1
Champagne gold	BC631-CH	2TCZ215009R4110	1

Framia

Room temperature controllers

Product	Article-No.	Order-No.	Pack/Qty
	ON/OFF Room temperature controller For triggering the ventilation and fan-coil actuators in ON/OFF type installations. Thermostat for fan-coil units in 2 pipes systems. Display elements: LCD showing four operation modes: Cooling/Air supply/Energy saving/Sleeping Selected models can use Modbus RS485 protocol. Rated voltage: 110-250V AC / 50-60Hz Load capacity: Resistive: 4A; Inductive: 2A Output voltage: 230V AC Temperature sensor: internal NTC Temperature Setting Range 5-35°C (0.5°C sensitivity) Temperature accuracy: +/- 1°C Installation box: 86 x 86 x 47 mm (BS type)		
Standard models:			
White	BR417	2TCZ204001R0010	1
Black	BR417-885	2TCZ204001R4410	1
Modbus RS485 option models:			
White	BR432	2TCZ204003R0010	1
Black	BR432-885	2TCZ204003R4410	1

Product	Article-No.	Order-No.	Pack/Qty
	0-10Vdc Modulating Room temperature controller For triggering the ventilation and fan-coil actuators in modulating 0-10Vdc valve installations. Thermostat for fan-coil units in 2 pipe systems. Display elements: LCD showing four operation modes: Cooling/Air supply/Energy saving/Sleeping Selected models can use Modbus RS485 protocol. Rated voltage: 24V AC / 50-60Hz Load capacity: Resistive: 4A; Inductive: 2A Output voltage: 0-10Vdc (valve), 230V AC (fan) Temperature sensor: internal NTC Temperature Setting Range 5-35°C (0.5°C sensitivity) Temperature accuracy: +/- 1°C Installation box 86 x 86 x 47 mm (BS type)		
Standard models:			
White	BR483	2TCZ204002R0010	1
Black	BR483-885	2TCZ204002R4410	1
Modbus RS485 option models:			
White	BR484	2TCZ204004R0010	1
Black	BR484-885	2TCZ204004R4410	1

Notes

Inora

Your first choice, simple and elegant

Whether it's in a kitchen, a living room or a child's room, with a total above-wall switch height of 8.5 mm, Inora is your first choice, simple and elegant.

White

Classic grey - G



White switch

Starry black - 885

Royal gold - PG

White socket

Inora

Selected functions

Switches

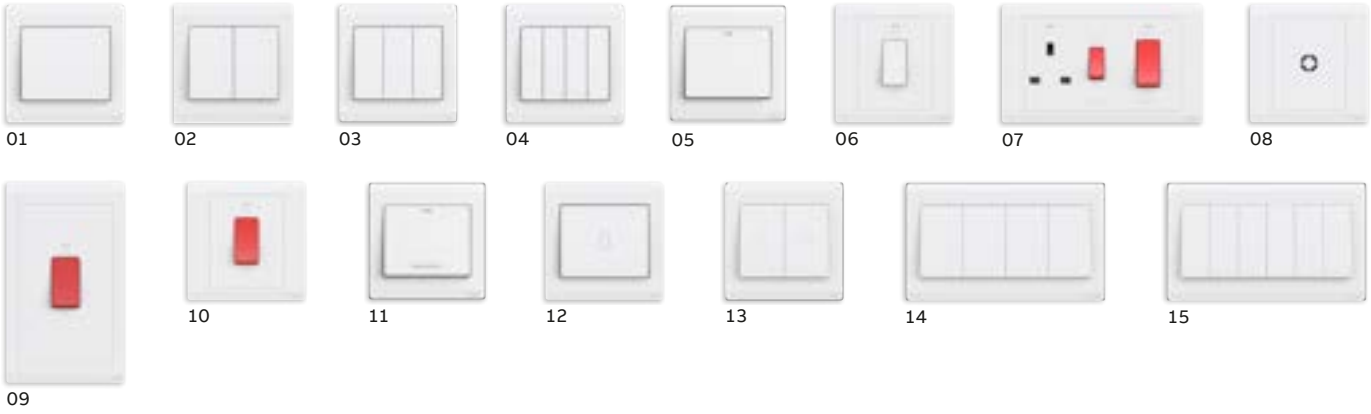

Socket outlets

Data outlets

Function control / FCU & Flex outlets / Accessories

Switches

01 1 Gang 1 Way 10AX SWITCH
02 2 Gang 1 Way 10AX SWITCH
03 3 Gang 1 Way 10AX SWITCH
04 4 Gang 1 Way 10AX SWITCH
05 1 Gang 1 Way 20AX DP SWITCH WITH LED
06 1 Gang 1 Way 20AX DP SWITCH WITH ILLUMINATION
07 2 Gang 1Way 45A DP SWITCH & 13A SWITCH SOCKET WITH ILLUMINATION
08 20A FLEX OUTLET
09 1 Gang 45A DP SWITCH WITH ILLUMINATION (6X3)
10 1 Gang 1 Way 32A DP SWITCH WITH ILLUMINATION
11 1 Gang 1 Way 20AX DP SWITCH WITH LED, MARKED WATER HEATER
12 1 Gang 1 Way 10A PUSH SWITCH- MARKED BELL
13 BLIND CONTROL SWITCH 10A
14 4 Gang 2 Way 10AX SWITCH (6X3)
15 6 Gang 2 Way 10AX SWITCH (6X3)

Socket outlets

16 1 Gang 13A SOCKET
17 1 Gang 13A SWITCHED SOCKET SP
18 1 Gang 13A SWITCHED SOCKET SP WITH ILLUMINATION
19 1 Gang 13A SWITCHED SOCKET SP WITH RED ROCKER & ILLUMINATION
20 1 Gang BS SWITCHED SOCKET DP WITH USB,TYPEA*2
21 1 Gang 13A SWITCHED SOCKET DP WITH USB,TYPE A+C
22 2 Gang USB CHARGER,TYPE A+C
23 1 Gang 15A SWITCHED SOCKET SP
24 2 Gang 10A EURO-AMERICAN SWITCHED SOCKET
25 1 Gang 16A EURO-AMERICAN SWITCHED SOCKET WITH EARTH
26 2 Gang 16A EURO-AMERICAN SWITCHED SOCKET WITH EARTH
27 1 Gang 16A SCHUKO SOCKET
28 2 Gang 13A SOCKET
29 2 Gang 13A SWITCHED SOCKET SP WITH ILLUMINATION
30 2 Gang BS SWITCHED SOCKET DP WITH USB,TYPEA*2
31 2 Gang 13A SWITCHED SOCKET DP WITH USB,TYPE A+C
32 2 Gang 13A SWITCHED MULTI-SOCKET SP WITH USB,TYPE A+C

Data outlets

33 1 Gang SAT OUTLET- 45 DEGREE , F TYPE
34 1 Gang TV OUTLET, DEAD-END LINE
35 2 Gang TV & FM OUTLET, DEAD-END LINE
36 3 Gang TV, SAT & FM OUTLET, DEAD-END LINE, F TYPE
37 2 Gang TV/ TELEPHONE OUTLET
38 2 Gang TV/ DATA OUTLET RJ45 CAT.5e
39 2 Gang TELEPHONE OUTLET RJ11
40 2 Gang DATA OUTLET

Function control / FCU & Flex outlets / Accessories

41 ELECTRONIC CARD SWITCH 16A
42 PUSH BUTTON, DND/MUR WITH BELL SYMBOL 10A
43 2 Gang SWITCH DND/MUR WITH NEON 10AX
44 LED DIMMER
45 SHAVER SOCKET
46 1 Gang 13A SWITCHED FUSED CONNECTION UNIT WITH ILLUMINATION
47 FLEX OUTLET 45A

Inora
Switches

1gang 1way 10 AX switch

Rated current: 10 AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL101**	2TCZ171001R0030	10

2gang 1way 10 AX switch



Rated current: 10 AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL102**	2TCZ171003R0030	10

3gang 1way 10 AX switch



Rated current: 10 AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL103**	2TCZ171005R0030	10

4gang 1way 10 AX switch

Rated current: 10 AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL104**	2TCZ171007R0030	10

1gang 2way 10 AX switch

Rated current: 10 AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL105**	2TCZ171002R0030	10

2gang 2way 10 AX switch



Rated current: 10 AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL106**	2TCZ171004R0030	10

3gang 2way 10 AX switch



Rated current: 10 AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL107**	2TCZ171006R0030	10

4gang 2way 10 AX switch

Rated current: 10 AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL108**	2TCZ171008R0030	10

1gang 1way 20AX Switch



Rated current: 20AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL110**	2TCZ171095R0070	12

1gang 1way 20AX DP Switch w/LED

Rated current: 20AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL111**	2TCZ171096R0070	12

Inora
Switches

1 Gang 1 Way 20AX DP SWITCH WITH ILLUMINATION

Rated current: 20AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL111S**	2TCZ171020R0070	12

1gang 2way 20AX Switch



Rated current: 20AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL112**	2TCZ171097R0070	12

2gang 1way 20AX Switch



Rated current: 20AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL114**	2TCZ171016R0070	12

2gang 2way 20AX Switch



Rated current: 20AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL115**	2TCZ171017R0070	12

3gang 1way 20AX Switch

Rated current: 20AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL146**	2TCZ171018R0070	10

3gang 2way 20AX Switch

Rated current: 20AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL147**	2TCZ171022R0070	10

2gang 1way 45 A DP switch & 13 A switched socket with illumination

Rated current: 45 A/13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL118**	2TCZ171015R0090	6

1gang Intermediate 10AX Switch



Rated current: 10AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL119**	2TCZ171009R0030	12

1 Gang INTERMEDIATE 10AX SWITCH

Rated current: 10AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL119S**	2TCZ171021R0030	12

20 A Flex outlet

Rated current: 20 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL120**	2TCZ171099R0070	12

Inora
Switches

1gang 45 A DP switch with illumination (6X3)

Rated current: 45 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL143**	2TCZ171019R0090	6

1 Gang 1 Way 20AX DP SW WITH ILLUMINATION- MARKED WATER HEATER

Rated current: 20AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL171WH**	2TCZ171012R0075	12

1gang 1way 32 A DP switch with illumination

Rated current: 32 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL176**	2TCZ171013R0090	10

1gang 1way 45 A DP switch with illumination

Rated current: 45 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL179**	2TCZ171098R0090	10

1gang 1way 20AX DP Switch w/LED,w/M"ON","WH"

Rated current: 20AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL180WH**	2TCZ171014R0070	12

1gang 2way 20AX DP Switch w/Neon,w/M"WH"

Rated current: 20AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL148WH**	2TCZ171023R0070	10

1gang 1way 10 A push switch-marked BELL

Rated current: 10 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL429**	2TCZ171011R0030	10

1gang 1way 10 A push switch

Rated current: 10 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL430**	2TCZ171010R0030	10

Inora
Switches

1gang 2way 10A Push Switch

Rated current: 10 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL456**	2TCZ171024R0030	10

2gang 1way 10A Push Switch



Rated current: 10 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL438**	2TCZ171025R0030	10

Blind Control Switch 10A

Rated current: 10 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL149**	2TCZ171026R0030	10

4gang 2way 10AX Switch (6X3)

Rated current: 10 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL191**	2TCZ171027R0030	6

6gang 2way 10AX Switch (6X3)

Rated current: 10 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL198**	2TCZ171028R0030	6

Inora

Socket outlets

1gang 15 A switched socket SP



Rated current: 15 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL209**	2TCZ172012R0050	10

1gang 13 A switched socket SP with red rocker & illumination

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL213**	2TCZ172020R0040	10

1 Gang 13A SWITCHED SOCKET SP WITH RED ROCKER

Rated current: 13A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL214**	2TCZ172019R0040	12

2 Gang 13A SWITCHED SOCKET SP WITH RED ROCKER

Rated current: 45 A/13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL215**	2TCZ172021R0040	6

1 Gang 13A SOCKET

Rated current: 13A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL208**	2TCZ172005R0040	12

2 Gang 13A SOCKET

Rated current: 45 A/13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL260**	2TCZ172006R0040	6

1gang 13 A switched socket SP

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL224**	2TCZ172001R0040	12

2 Gang 13A SWITCHED SOCKET SP



Rated current: 13A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL227**	2TCZ172010R0040	6

1gang 13A Switched Socket SP

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
red	**BL224-R**	2TCZ172001R6240	12

2gang 13A Switched Socket SP

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
red	**BL227-R**	2TCZ172010R6240	6

Inora

Socket outlets

1gang 13 A switched socket SP with illumination

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL229**	2TCZ172002R0040	12

2gang 13 A switched socket SP with illumination

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL230**	2TCZ172011R0040	6

2 Gang 13A SWITCHED SOCKET SP WITH RED ROCKER & ILLUMINATION



Rated current: 13A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL236**	2TCZ172094R0040	6

1gang 13 A switched socket DP

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL237**	2TCZ172095R0040	12

1gang 13 A switched socket DP with illumination

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL238**	2TCZ172096R0040	12

2gang 13 A switched socket DP

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL239**	2TCZ172097R0040	6

2gang 13 A switched socket DP with illumination

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL240**	2TCZ172098R0040	6

1gang BS switched socket DP with USB, type A*2

Rated current: 13 A
Flush-mounted Box Dimension: 47 mm

Colour	Type	Order code	Pack/Qty.
white	**BL261**	2TCZ172016R0040	10

2gang BS switched socket DP with USB, type A*2

Rated current: 13 A
Flush-mounted Box Dimension: 47 mm

Colour	Type	Order code	Pack/Qty.
white	**BL262**	2TCZ172017R0040	6

1gang 13A Switched Socket DP w/USB,Type A+C

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL247**	2TCZ172013R0040	10

Inora

Socket outlets

2gang 13A Switched Socket DP w/USB,Type A+C

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL248**	2TCZ172014R0040	6

2gang USB Charganger,Type A+C

Type A: Max 30W
Type C: Max 30W
Type A+C: Max 15W
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL249**	2TCZ172015R0010	10

2gang 13A Sw Multi-Socket SP w/USB,Type A+C

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL250**	2TCZ172018R0040	6

2 Gang 10A EURO-AMERICAN SWITCHED SOCKET

Rated current: 10A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL222**	2TCZ172004R0030	12

1gang 16A Euro-American Socket with Earth

Rated current: 16 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL244**	2TCZ172007R0060	12

2gang 16A Euro-American Socket with Earth



Rated current: 16 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL245**	2TCZ172008R0060	12

1G 13A Switched Multi-Socket Outlet

Rated current: 13A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL294**	2TCZ172003R0040	10

1gang 16A SCHUKO Socket

Rated current: 16 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL296**	2TCZ172009R0060	10

Inora

Data outlets

1gang TV Outlet,dead-end line

DEAD-END LINE
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL301**	2TCZ173001R0010	10

2gang data outlet RJ45 Cat.6a

F-type
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL308**	2TCZ173099R0010	14

2gang TV & FM Socket Outlet

5-1000MHz
Flush-mounted Box Dimension: 35mm

Colour	Type	Order code	Pack/Qty.
white	**BL312**	2TCZ173003R0010	10

3gang TV, SAT & FM Outlet

5-1000MHz
Flush-mounted Box Dimension: 35mm

Colour	Type	Order code	Pack/Qty.
white	**BL313**	2TCZ173002R0010	10

1gang SAT outlet - 45 degree

RJ45 Cat.6a
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL317**	2TCZ173019R0010	12

1 Gang DATA OUTLET RJ45 CAT.6a

RJ45 Cat.6a
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL318**	2TCZ173020R0010	10

1 Gang TELEPHONE OUTLET RJ11

RJ11
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL321**	2TCZ173006R0010	10

2gang telephone outlet RJ11

Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL322**	2TCZ173012R0010	10

2gang TV/ telephone outlet

5-1000MHz RJ11
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL324**	2TCZ173010R0010	10

2gang TV/ data outlet RJ45 Cat.5e

5-1000MHz
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL325**	2TCZ173016R0010	10

Inora

Data outlets

2gang data outlet RJ45 Cat.6

Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL329**	2TCZ173014R0010	10

1gang data outlet RJ45 Cat.5e

Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL331**	2TCZ173007R0010	10

1gang data outlet housing

Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL331-H**	2TCZ173017R0010	18

2gang data outlet RJ45 Cat.5e

Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL332**	2TCZ173013R0010	10

2gang data outlet housing

Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL332-H**	2TCZ173018R0010	18

1gang data outlet RJ45 Cat.6

Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL333**	2TCZ173008R0010	12

Inora

Function control / FCU&Flex outlets / Accessories

Shaver Socket

Input: 230V, 50 Hz/60 Hz
Outlet: 115 V/230 V, 20 VA
Flush-mounted Box Dimension: 47mm

Colour	Type	Order code	Pack/Qty.
white	**BL401**	2TCZ174002R0010	1

Electronic card Switch 16A

Rated current: 16 A
Flush-mounted Box Dimension: 41 mm

Colour	Type	Order code	Pack/Qty.
white	**BL402**	2TCZ174004R0060	8

DND/MUR Bell Switch 10A

Rated current: 10 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL403**	2TCZ174005R0030	10

DND/MUR Switch w/Neon 10AX

Rated current: 10 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL493**	2TCZ174006R0030	10

LED Dimmer

3-150VA
Flush-mounted Box Dimension: 35mm

Colour	Type	Order code	Pack/Qty.
white	**BL405**	2TCZ174003R0010	8

Rotary Dimmer

25-500VA
Flush-mounted Box Dimension: 35mm

Colour	Type	Order code	Pack/Qty.
white	**BL412**	2TCZ174001R0010	8

FLEX OUTLET 45A

Rated current: 45 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL590**	2TCZ175006R0090	8

Flex Outlet 45A

Rated current: 45A
Flush-mounted Box Dimension: 35mm

Colour	Type	Order code	Pack/Qty.
white	**BL590**	2TCZ175006R0090	8

1 Gang BLANK PLATE

Flush-mounted Box Dimension: 35mm

Colour	Type	Order code	Pack/Qty.
white	**BL504**	2TCZ175001R0010	20

Inora

Function control / FCU&Flex outlets / Accessories

2 Gang BLANK PLATE

Flush-mounted Box Dimension: 35mm

Colour	Type	Order code	Pack/Qty.
white	**BL505**	2TCZ175002R0010	14

1 Gang 13A UNSWITCHED FUSED CONNECTION UNIT

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL506**	2TCZ175003R0040	14

1 Gang 13A SWITCHED FUSED CONNECTION UNIT WITH ILLUMINATION

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL507**	2TCZ175004R0040	12

1 Gang 13A SWITCHED FUSED CONNECTION UNIT

Rated current: 13 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
white	**BL508**	2TCZ175099R0040	12

FLEX OUTLET 45A

Rated current: 45 A
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.

Product Technical Information

Dimensions

Dimensions for 1gang frames



Distance between fixing screws for 1gang frames



white	**BL590**	2TCZ175006R0090	8

Dimensions for 2gang frames

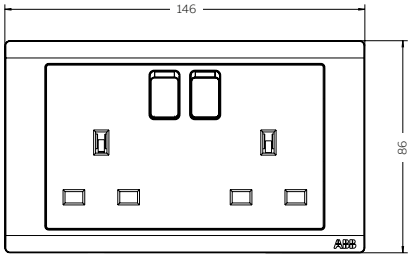

Distance between fixing screws for 2gang frames

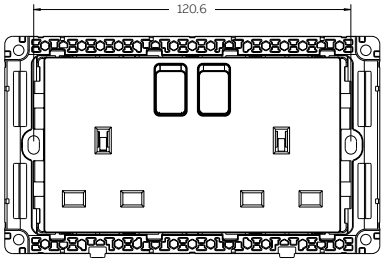

Dimensions for 1gang 45A DP switch (6x3)

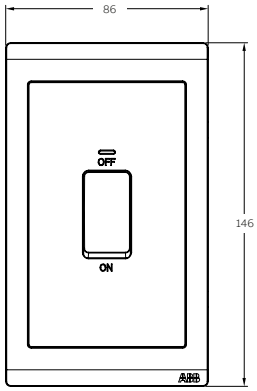

Distance between fixing screws for 45A DP switch (6x3)



Dimensions for shaver socket

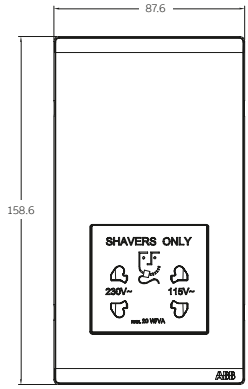

Distance between fixing screws for Shaver socket

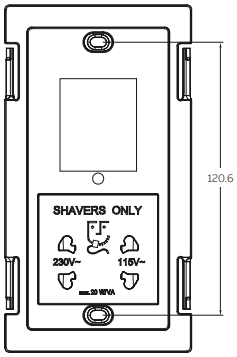

Inora

Function | Room Temperature Controllers

Product	Article-No.	Order-No.	Pack/Qty
	ON/OFF Room Temperature Controller For triggering the ventilation and fan-coil actuators in ON/OFF type installations. Thermostat for fan-coil units in 2 pipes systems. Display elements: LCD showing four operation modes: Cooling/Fan only/Energy saving/Sleep Selected models can use Modbus RS485 protocol. Rated voltage: 110-250 Vac / 50-60 Hz Load capacity: Resistive: 4 A; Inductive: 2 A Output voltage: 230 Vac Temperature sensor: internal NTC Temperature Setting Range 5-35°C (0.5°C sensitivity) Temperature accuracy: +/- 1°C Installation box: 86 x 86 x 47 mm (BS type)		
Standard models:			
White	**BR417**	2TCZ204001R0010	1
Black	**BR417-885**	2TCZ204001R4410	1
Modbus RS485 option models:			
White	**BR432**	2TCZ204003R0010	1
Black	**BR432-885**	2TCZ204003R4410	1

Product	Article-No.	Order-No.	Pack/Qty
	0-10Vdc Modulating Room Temperature Controller For triggering the ventilation and fan-coil actuators in modulating 0-10Vdc valve installations. Thermostat for fan-coil units in 2 pipe systems. Display elements: LCD showing four operation modes: Cooling/Fan only/Energy saving/Sleep Selected models can use Modbus RS485 protocol. Rated voltage: 24 Vac / 50-60 Hz Load capacity: Resistive: 4 A; Inductive: 2 A Output voltage: 0-10 Vdc (valve), 230 Vac (fan) Temperature sensor: internal NTC Temperature Setting Range 5-35°C (0.5°C sensitivity) Temperature accuracy: +/- 1°C Installation box 86 x 86 x 47 mm (BS type)		
Standard models:			
White	**BR483**	2TCZ204002R0010	1
Black	**BR483 -885**	2TCZ204002R4410	1
Modbus RS485 option models:			
White	**BR484**	2TCZ204004R0010	1
Black	**BR484 -885**	2TCZ204004R4410	1

Notes

Metal clad
Surface mounted wiring devices

The Metal clad range of surface mounted wiring devices is designed to be robust and resistant thanks to the high-quality coated metal plate. Capable of meeting wiring requirements in all commercial and light industrial applications.
It is ideal for use in service areas, parking areas, workshops, factories, warehouses, laboratories, hospitals, and as well as domestic application in lofts and garages.

Benefits & features

- Manufactured from high quality steel with good aesthetics
- Designed to withstand everyday knocks and scrapes
- The durable and tough finish is further enhanced by a superb protective coating to stand up to arduous duty and environment
- Designed for easy mounting and installations

2 Gang 13A switched
socket DP with Neon

WARRANTY POLICY 10 YEARS

10 years for mechanical switches and socket outlets.

Metal clad

Selected functions

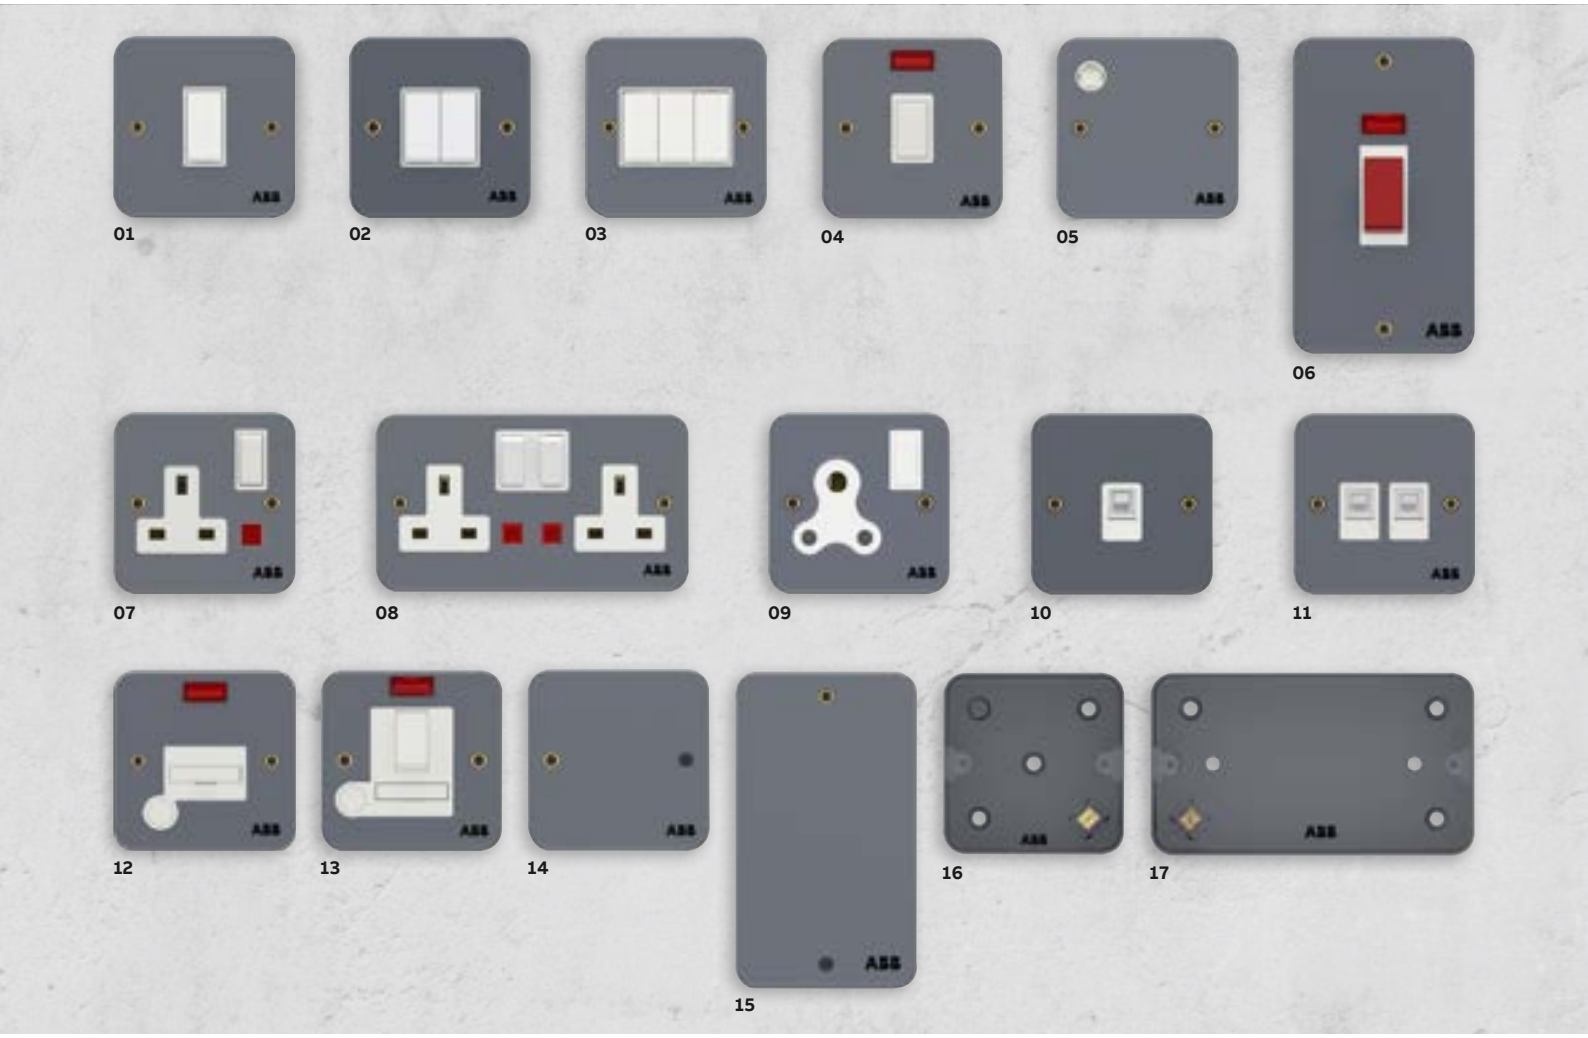

01 Rocker switch 1-gang
02 Rocker switch 2-gang
03 Rocker switch 3-gang
04 1Gang 20A DP Switch with Neon
05 20A Connection unit with Flex outlet
06 1Gang 45A DP Switch with Neon (6 x 3)
07 1Gang 13A Switched Socket DP with Neon
08 2Gang 13A Switched Socket DP with Neon
09 1Gang 15A Switched Socket SP

***Note: all wiring devices are supplied with backboxes.**

10 1Gang Data outlet, Cat.6 RJ45
11 2Gang Data outlet, Cat.6 RJ45
12 1Gang 13A Unswitched fused connection unit with Neon
13 1Gang 13A Switched fused connection unit with Neon
14 1Gang Blank plate
15 2Gang Blank plate
16 1Gang Metal mounting box
17 2Gang Metal mounting box

***Note: all wiring devices are supplied with backboxes.**

Metal clad
Switches

1Gang 1Way 10AX Switch



Rated current: 10 AX
Flush-mounted Box Dimension: 40mm

Colour	Type	Order code	Pack/Qty.
	BM101	2TCZ741004R0030	8

1Gang 2Way 10AX Switch



Rated current: 10 AX
Flush-mounted Box Dimension: 40mm

Colour	Type	Order code	Pack/Qty.
	BM105	2TCZ741005R0030	8

2Gang 1Way 10AX Switch

Rated current: 10 AX
Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
	BM102	2TCZ741006R0030	8

2Gang 2Way 10AX Switch

Rated current: 10 AX
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM106	2TCZ741007R0030	8

13Gang 1Way 10AX Switch

Rated current: 10 AX
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM103	2TCZ741008R0030	8

3Gang 2Way 10AX Switch

Rated current: 10 AX
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM107	2TCZ741009R0030	8

1Gang 10AX Intermediate Switch



Rated current: 10 AX
Flush-mounted Box Dimension: 40mm

Colour	Type	Order code	Pack/Qty.
	BM119	2TCZ741010R0030	8

1Gang 1Way 10A Push Switch



Rated current: 10 A
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM430	2TCZ741011R0030	8

1Gang 20A DP Switch with Neon

Rated current: 20 A
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM171	2TCZ741012R0070	8

Metal clad

Switches

1Gang 45A DP Switch with Neon (6 x 3)

Rated current: 45 A
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM177	2TCZ741013R0090	5

20A Connection unit with Flex outlet

Rated current: 20 A
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM120	2TCZ741014R0070	12

Socket & Data outlets

1Gang 13A Switched Socket DP with Neon

Rated current: 13 A
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM238	2TCZ742001R0040	8

2Gang 13A Switched Socket DP with Neon

Rated current: 13 A
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM240	2TCZ742002R0040	5

1Gang 15A Switched Socket SP

Rated current: 15 A
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM209	2TCZ742003R0050	8

1Gang Data outlet, Cat.6

RJ45
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM333	2TCZ743001R0010	8

2Gang Data outlet, Cat.6

RJ45
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM329	2TCZ743002R0010	8

Metal clad

FCU & Flex outlets/Accessories

1Gang 13A Unswitched fused connection unit with Neon

Rated current: 13 A
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM577	2TCZ745001R0040	8

1Gang 13A Switched fused connection unit with Neon

Rated current: 13 A
Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM507	2TCZ745002R0040	8

1Gang Blank plate

Colour	Type	Order code	Pack/Qty.
	BM504	2TCZ745003R0010	8

2Gang Blank plate

Colour	Type	Order code	Pack/Qty.
	BM505	2TCZ745004R0010	5

1Gang Metal mounting box

Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM541	2TCZ745005R0010	8

2Gang Metal mounting box

Flush-mounted Box Dimension: 40 mm

Colour	Type	Order code	Pack/Qty.
	BM542	2TCZ745006R0010	5

Weatherproof Switches and Socket Outlets

The Weatherproof Switches and Socket outlets could provide all-weather protection,prevent dust and powerful water jets, thanks to the good design and high-quality PC materials with the high temperature insulation,resistance to Ultra Violet (UV) radiation and anti-corrosion, capable of meeting electrical safety requirements in varius applications.

Weatherproof Switches

Selected functions

01

02

03

04

05

06

07

08

09

10

11

01 Switch- Isolator IP66
02 1G 16AX Switch IP66
03 2G 16AX Switch IP66
04 10AX/20AX Switch IP66
05 13A Unswitched socket outlet IP66
06 13A Switched socket outlet IP66
07 15A Switched socket outlet IP66
08 1G Weatherproof cover IP66
09 2G Weatherproof cover IP66
10 1G Weatherproof cover IP55
11 2G Weatherproof cover IP55

Weatherproof Switches

Isolator & Switches

20A 2P SWITCH-ISOLATOR

Rated current: 20 A

Colour	Type	Order code	Pack/Qty.
	WSD220CL	2TCZ751006R0001	1

32A 2P SWITCH-ISOLATOR

Rated current: 32 A

Colour	Type	Order code	Pack/Qty.
	WSD232CL	2TCZ751006R0002	1

45A 2P SWITCH-ISOLATOR

Rated current: 45 A

Colour	Type	Order code	Pack/Qty.
	WSD245CL	2TCZ751006R0003	1

63A 2P SWITCH-ISOLATOR

Rated current: 60 A

Colour	Type	Order code	Pack/Qty.
	WSD263CL	2TCZ751006R0004	1

20A 4P SWITCH-ISOLATOR

Rated current: 20 A

Colour	Type	Order code	Pack/Qty.
	WSD420CL	2TCZ751006R0005	1

32A 4P SWITCH-ISOLATOR

Rated current: 32 A

Colour	Type	Order code	Pack/Qty.
	WSD432CL	2TCZ751006R0006	1

45A 4P SWITCH-ISOLATOR

Rated current: 45 A

Colour	Type	Order code	Pack/Qty.
	WSD445CL	2TCZ751006R0007	1

63A 4P SWITCH-ISOLATOR

Rated current: 60 A

Colour	Type	Order code	Pack/Qty.
	WSD463CL	2TCZ751006R0008	1

Weatherproof 16AX 1G 2W SW

Rated current: 16 AX

Colour	Type	Order code	Pack/Qty.
	WSW211	GJF6110717R0100	1

Weatherproof 16AX 2G 2W SW

Rated current: 16 AX

Colour	Type	Order code	Pack/Qty.
	WSW221	GJF6110817R0100	1

Weatherproof Switches

Isolator & Switches

Weatherproof 10AX 1W SW

Rated current: 10 AX

Colour	Type	Order code	Pack/Qty.
	WSW101CL	2TCZ751003R0030	1

Weatherproof 10AX 2W SW

Rated current: 10 AX

Colour	Type	Order code	Pack/Qty.
	WSW102CL	2TCZ751004R0030	1

Weatherproof 20AX 2P SW

Rated current: 20 AX

Colour	Type	Order code	Pack/Qty.
	WSW114CL	2TCZ751005R0070	1

Socket outlets

Weatherproof 13A UN-SW Socket Outlet

Rated current: 13 A

Colour	Type	Order code	Pack/Qty.
	WSO123CL	2TCZ752001R0040	1

Weatherproof 13A SW Socket Outlet

Rated current: 13 A

Colour	Type	Order code	Pack/Qty.
	WSO113CL	2TCZ752002R0040	1

Weatherproof 15A SW Socket Outlet

Rated current: 15 A

Colour	Type	Order code	Pack/Qty.
	WSO215CL	2TCZ752003R0050	1

Weatherproof Switches

Accessories

1G Weatherproof Cover IP55

Colour	Type	Order code	Pack/Qty.
	WSC101	2TCZ755001R0010	1

2G Weatherproof Cover IP55

Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
	WSC201	2TCZ755002R0010	1

2G Weatherproof Cover IP55

Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
	WSC102	2TCZ755003R0010	1

1G weatherproof cover IP66

Flush-mounted Box Dimension: 35 mm

Colour	Type	Order code	Pack/Qty.
	WSC202	2TCZ755004R0010	1

Notes

BS Thermostat
Product overview

The BR series Room Temperature Controller (RTC) family can be connected to fan coil units in residential, hotel and commercial buildings. The RTCs can control 2-pipe installations using ON/OFF valve systems or 0-10Vdc modulating valves.
The device fits in flush-mounted boxes with a 60.3 screw distance (BS 4662).
The BR series thermostats feature a large display with touch control buttons for easy operation. The frameless design, along with its large display ensures easy viewing and adds an elegant touch to complement its surroundings.

BS Thermostat

Function | Room Temperature Controllers

Room Temperature Control

Thermostat, ON/OFF (2/3 wires)

Colour	Type	Order code	Supply	Pack/Qty.
White	**BR417**	2TCZ204001R0010	85-250VAC	1
Black	**BR417-885**	2TCZ204001R4410	85-250VAC	1

Room Temperature Control

Thermostat, ON/OFF (2/3 wires)-RS485 Modbus

Colour	Type	Order code	Supply	Pack/Qty.
White	**BR432**	2TCZ204003R0010	85-250VAC	1
Black	**BR432-885**	2TCZ204003R4410	85-250VAC	1

Room Temperature Control

Thermostat, 0-10Vdc output

Colour	Type	Order code	Supply	Pack/Qty.
White	**BR483**	2TCZ204002R0010	24VAC	1
Black	**BR483-885**	2TCZ204002R4410	24VAC	1

Room Temperature Control

Thermostat, 0-10Vdc output-RS485 Modbus

Colour	Type	Order code	Supply	Pack/Qty.
White	**BR484**	2TCZ204004R0010	24VAC	1
Black	**BR484-885**	2TCZ204004R4410	24VAC	1

ocean®

Beauty with inner values.

Fascinates due to its form and colour and has a prize-winning look. This range is convincing not only by design but also by functionality, because it is robust, easy to install and versatile.

01 grey / blue-green
02 alpine white

Materials
Cover: thermoplastic cover (PP), fracture-resistant, UV-resistant, weather-proof, free of PVC and halogen.

ocean®

Selected functions.

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

01 Rocker switch 1-gang
02 Rocker switch 2-gang
03 Rocker switch 1-gang with neutral lens
04 Rocker switch 1-gang with labelling field
05 Rocker switch 1-gang with red neon lens
06 Push-switch 1-gang
07 Push-switch 1-gang with neutral lens
08 Blind switch with labelling field
09 Key switch
10 SCHUKO® socket outlet with hinged lid
11 SCHUKO® socket outlet With security lock in hinged lid
12 Socket outlet with earthing pin
13 Twilight switch with labelling field
14 SCHUKO® socket outlet 2-gang, vertical installation
15 SCHUKO® socket outlet 2-gang, horizontal installation
16 SCHUKO® socket outlet 3-gang, horizontal installation

For more information about light switch ranges visit ABB global web sites.

ocean®

The specialist for extreme cases.

01 **02** **03** **04**

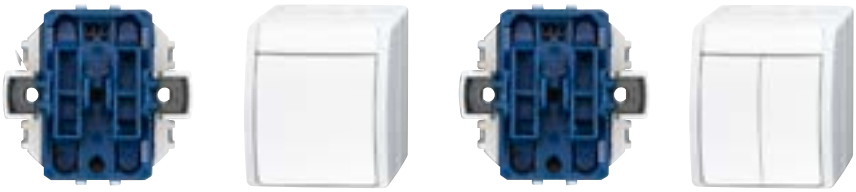

01 Push-button coupling 1/2-gang with integrated bus coupler
Article-No. 6108/04-500
02 Push-button for push-button coupling 1/2-gang with integrated bus coupler
Article-No. 2601/6 W-54
03 Push-button coupling 2/4-gang with integrated bus coupler
Article-No. 6108/05-500
04 Push-button for push-button coupling 2/4-gang with integrated bus coupler
Article-No. 2601/5 W-54

ocean®

Lighting inserts.

Application for		V	mA	W	Art. No. Order No.	Art. No. Order No.	Art. No. Order No.
Suitable for devices 2601/ . . . 2621/ . . .					 Neon/incandescent glow lamps with connecting cable.	 Neon/incandescent lamps with E-10 thread	
1.	SM switch/push-switch without serial switch	230	0,6		**8332-1** [2] 1784-0-0016		
2.	SM switch/push-switch without serial switch	230	1,0		**8346-1** [1) 2)] 1784-0-0321		
3.	SM serial switch	230	0,6		**8339-1** [2] 1784-0-0040		
4.	For SM switch/push-button	24	40		**8358** [3] 1784-0-0719		
5.	For SM switch/push-button	12	40		**8335-1** [3] 1784-0-0529		
6.	SM switch/push-switch without serial switch	3, 5, 8	40		**8333-1** [3] 1784-0-0024		
7.	Light signal/warning indicator	230	1,3			**8302** [2] 1780-0-0022	
8.	Light signal	230		3,0		**8340** [3] 1784-0-0222	
9.	Light signal	24		2,0		**8343** [3] 1784-0-0263	
10.	Light signal	12		1,5		**8342** [3] 1784-0-0255	
11.	Light signal	6		1,2		**8341** [3] 1784-0-0248	
12.	Illumination insert						**2152 NLI-53** 1784-0-0777

ocean®

Water protected ranges IP 44.

Combination possibility
Using the cable entry, various inserts are freely combinable. In addition to data communication products, other special inserts like key switches, rocker switches, or twilight switches can be fully integrated.

The combination that acts like a single component.
Article-No. 2601/6/20 EW-54
Article-No. 2138 W-54
Article-No. 2661 W-54 with 2863-13-53

Double cable entry from the top

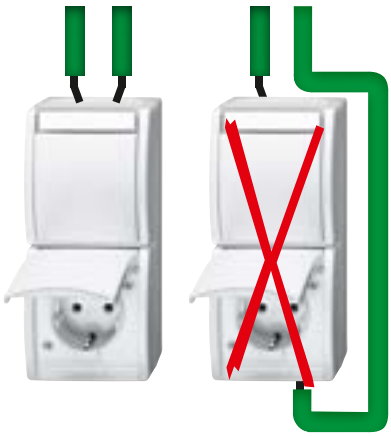

Due to the large connecting space the power cord for the socket outlet, which is connected to a different electric circuit, can be fed through the shielding up to the socket outlet.



Clear assignment of the consumers
Uniform labelling field for switches and socket outlets (optional).



Visible in the dark
Large-area lighting of the labelling field by LED for all switches and push-switches (optional).

Fast mounting using the PoziDriv screw (+/–), PZ 1 (with triple-pitch fast release stainless steel thread). Same mounting dimensions as the WS range.

Easy connection
Large connection area even for 5 x 2.5 mm² conductors. Easy through--connections underneath the base.

Safe feed-through
Feed-through of earth wire via terminal block.

Colour-matching duct entry
Available in both colours for use in cable ducts.

ocean®

IP 44

Rocker switch [1] [2] [3] 1gang 2way

Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/6 W-53-500**	2CKA001085A1637	10/100
alpine white	**2601/6 W-54-500**	2CKA001085A1632	10/100

[1] Label holder 1763-53.
[2] Label holder illuminable with illumination insert 2152 NLI-53.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Rocker switch [1] [2] [3] 2gang 1way

Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/5 W-53-500**	2CKA001085A1633	10/100
alpine white	**2601/5 W-54**	2CKA001085A1621	10

[1] Label holder 1763-53.
[2] Label holder illuminable with illumination insert 2152 NLI-53.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Rocker switch [1] [2] [3] 1gang

Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/7 W-53**	2CKA001085A1604	10/100
alpine white	**2601/7 W-54**	2CKA001085A1620	10

[1] Label holder 1763-53.
[2] Label holder illuminable with illumination insert 2152 NLI-53.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Rocker switch [1] [2] [3] breaking circuit, 2-pole

Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/2 W-53**	2CKA001085A1605	10/100
alpine white	**2601/2 W-54**	2CKA001085A1627	10

[1] Label holder 1763-53.
[2] Label holder illuminable with illumination insert 2152 NLI-53.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Rocker switch [1] [2] [3] [4] 1gang 2way

With neutral (transparent) lens.
With illumination.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/6 WGL-53**	2CKA001085A1613	10
alpine white	**2601/6 WGL-54**	2CKA001085A1626	10

[1] Label holder 1763-53.
[2] Label holder illuminable with illumination insert 2152 NLI-53.
[3] Switch illuminable by inserting the lamp 8332-1, 8335-1, 8346-1, 8333-1 and 8358.
[4] Neon lamp 8346-1 included.

Rocker switch [1] [2] 1gang 2way

With labelling field.
Labelling field 57.8 x 9.8 mm
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/6 WN-53-500**	2CKA001085A1635	10/100
alpine white	**2601/6 WN-54**	2CKA001085A1624	10/100

[1] Label holder illuminable with illumination insert 2152 NLI-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Rocker switch [1] [2] [3] [4] [5] 1gang 2way

With red neon lens.
With neon lamp.
With N terminal.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/6 SKW-53-500**	2CKA001085A1636	10/100
alpine white	**2601/6 SKW-54**	2CKA001085A1622	10

[1] Label holder 1763-53.
[2] Label holder illuminable with illumination insert 2152 NLI-53.
[3] Neon lamp 8346-1 included.
[4] Switch illuminable by inserting the lamp 8332-1, 8335-1, 8346-1, 8333-1 and 8358.
[5] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

ocean®

IP 44

Rocker switch with marking "Heizung" [1] [2] [3] [4] [5] 1gang 2way

With red neon lens.
With neon lamp.
With labelling field.
Labelling field 57.8 x 9.8 mm
With N terminal.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/6 SKWNH-53**	2CKA001085A1609	10/100
alpine white	**2601/6 SKWNH-54**	2CKA001085A1631	10

[1] Label holder illuminable with illumination insert 2152 NLI-53.
[2] Switch illuminable by inserting the lamp 8332-1, 8335-1, 8346-1, 8333-1 and 8358.
[3] Neon lamp 8346-1 included.
[4] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[5] Neutral labelling field enclosed.

Rocker switch with marking "Heizung" [1] [2] [3] [4] [5] breaking circuit, 2-pole

With red neon lens.
With neon lamp.
With labelling field.
Labelling field 57.8 x 9.8 mm
Rated voltage: 250 V~
Rated current: 16 AX
Suitable for: LEDi / CFLi
Rated power: 200 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/2 SKWNH-53**	2CKA001085A1610	10
alpine white	**2601/2 SKWNH-54**	2CKA001085A1623	10

[1] Label holder illuminable with illumination insert 2152 NLI-53.
[2] Switch illuminable by inserting the lamp 8332-1, 8335-1, 8346-1, 8333-1 and 8358.
[3] Neon lamp 8346-1 included.
[4] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[5] "Heizung" inscription label also included.

Push-switch [1] [2] [3] 1gang 1way

SP (operating current),
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2621 W-53-500**	2CKA001484A0382	10/100
alpine white	**2621 W-54**	2CKA001484A0380	10

[1] Label holder 1763-53.
[2] Label holder illuminable with illumination insert 2152 NLI-53.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Push-switch [1] [2] [3] [4] 1gang 2way

With neutral (transparent) lens.
SP,
With N terminal.
Can be wired for normally open contacts (stand-by current) or normally closed contacts (operating current).
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2621 W-53-206**	2CKA001484A0054	10
alpine white	**2621 W-54-206**	2CKA001484A0377	10

[1] Label holder 1763-53.
[2] Label holder illuminable with illumination insert 2152 NLI-53.
[3] Switch illuminable by inserting the lamp 8332-1, 8335-1, 8346-1, 8333-1 and 8358.
[4] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Push-switch [1] [2] [3] [4] [5] 1gang 1way

With neutral (transparent) lens.
With illumination.
SP (operating current),
With N terminal.
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2621 WGL-53-500**	2CKA001484A0383	10/100
alpine white	**2621 WGL-54**	2CKA001484A0381	10

[1] Label holder 1763-53.
[2] Label holder illuminable with illumination insert 2152 NLI-53.
[3] Push switch illuminable by inserting the lamp 8332-1, 8335-1, 8346-1, 8333-1 and 8358.
[4] Neon lamp 8346-1 included.
[5] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Push-switch [1] [2] [3] 1gang 1way

SP (operating current),
With N terminal.
With 2 independent answering contacts.
With labelling field.
Labelling field 57.8 x 9.8 mm
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2621 WN-53-201**	2CKA001484A0373	10
alpine white	**2621 WN-54-201**	2CKA001484A0378	10

[1] Label holder illuminable with illumination insert 2152 NLI-53.
[2] Push switch illuminable by inserting the lamp 8332-1, 8335-1, 8346-1, 8333-1 and 8358.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

ocean®

IP 44

2gang 1way [1] [2] [3] 2gang 1way, SP (operating current)

2 actuating covers, 2 x SP,
with 2 separate current paths,
Without N terminal. With labelling field.
Labelling field 57.8 x 9.8 mm
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2621 WN-53-205-101**	2CKA001484A0374	10
alpine white	**2621 WN-54-205-101**	2CKA001484A0379	10

[1] Label holder 1763-53.
[2] Label holder illuminable with illumination insert 2152 NLI-53.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Symbol for push-switch

For ocean® and All Weather 44 ranges.
Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
	without symbol		
clear-transparent	**2622 N-101**	2CKA001714A0252	10
	light		
clear-transparent	**2622 LI-101**	2CKA001714A0260	10
	bell		
clear-transparent	**2622 KI-101**	2CKA001714A0278	10
	key		
clear-transparent	**2622 TR-101**	2CKA001714A0286	10
	Red		
Red	**2622-12-101**	2CKA001714A0294	10

Blind switch [1] [2] [3] Rocker Switch, SP

With interlock.
With labelling field.
Labelling field 57.8 x 9.8 mm
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/4 W-53**	2CKA001085A1612	10
alpine white	**2601/4 W-54**	2CKA001085A1625	10

[1] Label holder illuminable with illumination insert 2152 NLI-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Blind switches/push switches prevents fast change over between operating directions.

Blind switch/push switch, with marking [1] [2] [3] push-switch, SP

With interlock.
With labelling field.
Labelling field 57.8 x 9.8 mm
Rated voltage: 250 V~
Rated current: 10 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2621/4 W-53**	2CKA001442A0469	10
alpine white	**2621/4 W-54**	2CKA001442A0474	10

[1] Label holder illuminable with illumination insert 2152 NLI-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Blind switches/push switches prevents fast change over between operating directions.

Busch-Blind control switch/push-switch [1] [2] [3] [4] cover switch, 1gang 2way, DP

For profile semi-cylindrical lock.
Key push-switch.
Key can only be removed in central position.
With labelling field.
Labelling field 57.8 x 9.8 mm
IP 44 only in combination with appropriate cylindrical locks.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2712 SLW-53**	2CKA001101A0916	10
alpine white	**2712 SLW-54**	2CKA001101A0924	10

[1] Key not removable in end position.
[2] See semi-cylindrical lock.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4] Labelling strip non-illuminable.

Key switch [1] [2] [3] breaking circuit, 1-pole

For profile semi-cylindrical lock.
In switched-on and switched-off status the key can be pulled out in the central position, respectively.
With labelling field.
Labelling field 57.8 x 9.8 mm
IP 44 only in combination with appropriate cylindrical locks.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2733 SLW-53**	2CKA001101A0917	10
alpine white	**2733 SLW-54**	2CKA001101A0925	10

[1] See semi-cylindrical lock.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Labelling strip non-illuminable.

ocean®

IP 44

Pull cord switch [1] [2] [3] 1gang 2way

With screw-type terminals.
Rated voltage: 250 V~
Rated current: 10 AX
Suitable for: LEDi / CFLi
Rated power: 100 W, Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2610/6 W-53**	2CKA001383A0141	10
alpine white	**2610/6 W-54**	2CKA001383A0143	10

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Labelling strip non-illuminable.

Pullcord fastening

Spare part for: 2610/6 UJ-21x, 2610/6 AP, 2610/6 W-5x
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	1797	2CKA001799A0592	10

Neon indicator [1] [2] [3] [4] [5] with E 10-thread

With screw-type terminals.
without cover, without lamp, IP 44 only in combination with appropriate covers. Rated voltage: 250 V~
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2661 W-53**	2CKA001582A0305	10
alpine white	**2661 W-54**	2CKA001582A0328	10

[1] Label holder 1763-53.
[2] Label holder illuminable with illumination insert 2152 NLI.
[3] Indication lamp illuminable using E 10 lamps 8302, 8340, 8341, 8342, 8343.
[4] Use of the intense-light neon lamp 8340 is recommended in the case of red and green covers.
[5] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Cap for indication lamp

2661 W-53
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
clear-transparent	**2863-11-53**	2CKA001563A0148	10
Red	**2863-12-53**	2CKA001563A0149	10
green	**2863-13-53**	2CKA001563A0150	10

SCHUKO® socket outlet [1] [2] with hinged lid

With screwless terminals.
2 P + E, Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20 EW-53-500**	2CKA002083A0845	10/100
alpine white	**20 EW-54-500**	2CKA002083A0846	10/100

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

SCHUKO® socket outlet [1] [2] [3] shuttered

With screwless terminals.
With hinged lid. 2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20 EBW-53**	2CKA002083A0842	10/100
alpine white	**20 EBW-54**	2CKA002083A0843	10

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Increased shock protection .

SCHUKO® socket outlet [1] with hinged lid and labelling field

With screwless terminals. With labelling field.
Labelling field 57.8 x 9.8 mm. 2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20 EWN-53-500**	2CKA002083A0848	10/100
alpine white	**20 EWN-54**	2CKA002083A0831	10/100

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

SCHUKO® socket outlet [1] with green hinged lid

With screwless terminals. 2 P + E
With green hinged lid, SV (RAL 6018).
With labelling field. Labelling field 57.8 x 9.8 mm
Continuous coloured marking (hinged lid and base).
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20 EWN-13-53**	2CKA002083A0819	10
alpine white	**20 EWN-13-54**	2CKA002083A0837	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

ocean®

IP 44

SCHUKO® socket outlet [1] with orange hinged lid

With screwless terminals.
2 P + E
With orange hinged lid, ZSV, (RAL 2004).
With labelling field.
Labelling field 57.8 x 9.8 mm
Continuous coloured marking (hinged lid and base).
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20 EWN-14-53**	2CKA002083A0820	10
alpine white	**20 EWN-14-54**	2CKA002083A0838	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

SCHUKO® socket outlet [1] with red hinged lid

With screwless terminals.
2 P + E
With red hinged lid, EDP (RAL 6018).
With labelling field.
Labelling field 57.8 x 9.8 mm
Continuous coloured marking (hinged lid and base).
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20 EW/DVN-53**	2CKA002083A0825	10
alpine white	**20 EW/DVN-54**	2CKA002083A0839	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Combination SCHUKO® socket outlet with rocker switch [1] [2] [3] [4] [5] 1gang 2way

For vertical installation.
2 P +
Rated voltage: 250 V~
Rated current: 16 A
Suitable for: LEDi / CFLi
Rated current: 10 AX
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 166 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
alpine white	**2601/6/20 EW-54**	2CKA001684A0327	5/50
grey / blue-green	**2601/6/20EW-53-500**	2CKA001684A0332	5/50

[1] Label holder 1763-53.
[2] Label holder of the switch illuminable with illumination insert 2152 NLI-53.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4] Terminals of the socket outlet suitable for loop connection in accordance with VDE 0620-1.
[5] Instead of the SCHUKO® socket outlets, switches, push-switches, light signals, or SCHUKO®-socket outlets with locks can be used.

Kombination SCHUKO® Steckdose Saftey+, mit Wippschalter [1] [2] [3] [4] [5]

1gang 2way. For vertical installation.
2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Suitable for: LEDi / CFLi
Rated current: 10 AX
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 166 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/6/20 EBW-53**	2CKA001684A0330	5
alpine white	**2601/6/20 EBW-54**	2CKA001684A0331	5

[1] Label holder 1763-53.
[2] Label holder of the switch illuminable with illumination insert 2152 NLI-53.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4] Terminals of the socket outlet suitable for loop connection in accordance with VDE 0620-1.
[5] Instead of the SCHUKO® socket outlets, switches, push-switches, light signals, or SCHUKO®-socket outlets with locks can be used.

Combination SCHUKO® socket outlet, with rocker switch [1] [2] [3] [4] [5] [6] 2gang 1way

For vertical installation. 2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Suitable for: LEDi / CFLi
Rated current: 10 AX
Rated power: 100 W
Protection class (Device): IP 44
Dimensions: (L x W x D): 166 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2601/5/20EW-53-503**	2CKA001684A0324	5/50
alpine white	**2601/5/20EW-54-503**	2CKA001684A0328	5/50

[1] Label holder 1763-53.
[2] Label holder of the switch illuminable with illumination insert 2152 NLI-53.
[3] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[4] With high cable entry.
[5] Terminals of the socket outlet suitable for loop connection in accordance with VDE 0620-1.
[6] Instead of the SCHUKO® socket outlets, switches, push-switches, light signals, or SCHUKO®-socket outlets with locks can be used.

SCHUKO® socket outlet [1] [2]

With screwless terminals.
With security lock in hinged lid.
2 P + E. Lockable. 2 keys.
Cannot be screwed on or dismounted in closed condition.
approx. 200 different locks (unsorted),
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20 EWSL-53**	2CKA002083A0822	10/50
alpine white	**20 EWSL-54**	2CKA002083A0832	10

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

ocean®

IP 44

SCHUKO® socket outlet [1] [2]

With screwless terminals.
With security lock in hinged lid.
2 P + E
Standard lock with 2 identical keys.
Cannot be screwed on or dismounted in closed condition.
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20 EWSL-101-53**	2CKA002083A0823	10
alpine white	**20 EWSL-101-54**	2CKA002083A0833	10

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

2 SCHUKO® socket outlets [1] [2] [3]

With screwless terminals.
2 P + E
With 2 identical security locks in hinged lid and 2 identical keys.
Cannot be screwed on or dismounted in closed condition.
geminate approx. 200 different locks (unsorted),
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20/20 EWSL-53**	2CKA002083A0816	1/10
alpine white	**20/20 EWSL-54**	2CKA002083A0836	1

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] For operating 2 different circuits in shared rooms via user's meter.

SCHUKO® socket outlet [1] [2] [3] 2gang

For vertical installation.
With screwless terminals.
Prewired
with hinged lids,
2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 166 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20-02 EW-53-500**	2CKA002084A0729	5/50
alpine white	**20-02 EW-54**	2CKA002084A0710	5

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Instead of the SCHUKO® socket outlets, switches, push-switches, light signals, or SCHUKO®-socket outlets with locks can be used.

SCHUKO® socket outlet [1] [2] [3] [4] shuttered

2gang
For vertical installation.
With screwless terminals.
Prewired
with hinged lids,
2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 166 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20-02 EBW-53**	2CKA002084A0719	5
alpine white	**20-02 EBW-54**	2CKA002084A0722	5

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Instead of the SCHUKO® socket outlets, switches, push-switches, light signals, or SCHUKO®-socket outlets with locks can be used.
[4] Increased shock protection .

SCHUKO® socket outlet [1] [2] 2gang

For vertical installation.
With screwless terminals.
Prewired
with hinged lids,
With labelling field.
Labelling field 57.8 x 9.8 mm
2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 166 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20-02 EWN-53**	2CKA002084A0702	5
alpine white	**20-02 EWN-54**	2CKA002084A0714	5

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Instead of the SCHUKO® socket outlets, switches, push-switches, light signals, or SCHUKO®-socket outlets with locks can be used.

SCHUKO® socket outlet [1] [2] 2gang

For horizontal installation.
With screwless terminals.
Prewired
with hinged lids,
2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 145 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20/2 EW-53-500**	2CKA002084A0726	5/50
alpine white	**20/2 EW-54-500**	2CKA002084A0727	5/50

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

ocean®

IP 44

SCHUKO® socket outlet [1] [2] [3] shuttered

2gang
For horizontal installation.
With screwless terminals.
Prewired
with hinged lids,
2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 145 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20/2 EBW-53**	2CKA002084A0720	5/50
alpine white	**20/2 EBW-54**	2CKA002084A0723	5

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Increased shock protection .

SCHUKO® socket outlet [1] 2gang

For horizontal installation.
With screwless terminals.
Prewired
with hinged lids,
With labelling field.
Labelling field 57.8 x 9.8 mm
2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 145 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20/2 EWN-53-500**	2CKA002084A0728	5/50
alpine white	**20/2 EWN-54**	2CKA002084A0715	5/50

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

SCHUKO® socket outlet [1] 2gang with red hinged lids

For horizontal installation.
With screwless terminals.
2 P + E
Prewired
With red hinged lid, EDP (RAL 6018).
With labelling field.
Labelling field 57.8 x 9.8 mm
Continuous coloured marking (hinged lid and base).
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 145 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20/2 EW/DVN-53**	2CKA002084A0700	5
alpine white	**20/2 EW/DVN-54**	2CKA002084A0713	5

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

SCHUKO® socket outlet [1] [2] [3] 3gang

For horizontal installation.
With screw-type terminals.
Prewired
with hinged lids,
2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 222 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2300/3 EW-53-500**	2CKA002084A0725	1/10
alpine white	**2300/3 EW-54**	2CKA002084A0712	1/10

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Instead of the SCHUKO® socket outlets, switches, push-switches, light signals, or SCHUKO®-socket outlets with locks can be used.

SCHUKO® socket outlet [1] [2] [3] [4] shuttered

3gang
For horizontal installation.
With screw-type terminals.
Prewired
With hinged lids
2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 222 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2300/3 EBW-53**	2CKA002084A0721	1/10
alpine white	**2300/3 EBW-54**	2CKA002084A0724	1/10

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Instead of the SCHUKO® socket outlets, switches, push-switches, light signals, or SCHUKO®-socket outlets with locks can be used.
[4] Increased shock protection .

SCHUKO® socket outlet [1] [2] 3gang

For horizontal installation.
With screw-type terminals.
Prewired
With hinged lids
With labelling field.
2 P + E
Labelling field 57.8 x 9.8 mm
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 222 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2300/3 EWN-53**	2CKA002084A0704	1/10
alpine white	**2300/3 EWN-54**	2CKA002084A0716	1/10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Instead of the SCHUKO® socket outlets, switches, push-switches, light signals, or SCHUKO®-socket outlets with locks can be used.

ocean®

IP 44

Socket outlet [1] [2] [3] with earthing pin

With screwless terminals.
With hinged lid.
Suitable for the countries like Poland, Czech Republic.
2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**20 MW-53-500**	2CKA002017A0762	10/100
alpine white	**20 MW-54-500**	2CKA002017A0849	10

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Terminals suitable for loop connection in acc. with IEC 60 884-1.

Socket outlet [1] [2] [3] with earthing pin

With screw-type terminals.
With hinged lid.
Shuttered.
Suitable for countries like Belgium.
2 P + E
Rated voltage: 250 V~
Rated current: 16 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**23 MWKS-53-504**	2CKA002017A0763	10/100
alpine white	**23 MWKS-54-504**	2CKA002017A0842	10

[1] Label holder 1763-53.
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] Terminals suitable for loop connection in acc. with IEC 60 884-1.

Busch-Nema socket outlet [1] [2] with yellow hinged lid

With screw-type terminals.
2 P + E
With yellow hinged lid (RAL 1018).
With labelling field.
Labelling field 57.8 x 9.8 mm
Rated voltage: 125 V
Rated current: 15 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**3015 EWN-53**	2CKA002124A0023	10/100
alpine white	**3015 EWN-54**	2CKA002124A0025	10

[1] Use in accordance with US Standard (e.g. in US military barracks).
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Busch-Nema socket outlet [1] [2] with yellow hinged lid

With screw-type terminals.
2 P + E
With yellow hinged lid (RAL 1018).
With labelling field.
Labelling field 57.8 x 9.8 mm
Rated voltage: 125 V
Rated current: 20 A
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**3016 EWN-53**	2CKA002124A0024	10
alpine white	**3016 EWN-54**	2CKA002124A0026	10

[1] Use in accordance with US Standard (e.g. in US military barracks).
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Twilight switch [1] [2]

With labelling field.
Labelling field 57.8 x 9.8 mm
Switch-on/switch-off delay: approx. 3-6 min non-adjustable.
Rated voltage: 230 V~
Rated frequency: 50 Hz
Rated current: 16 AX
Rated power: 3680 W/VA

Brightness limit value: 3 Lux - 500 Lux nominal
Protection class (Device): IP 44
Temperature range (Device): -35 °C to 55 °C
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm



Colour	Type	Order code	Pack/Qty.
grey	**2240 W-53**	2CKA006500A0791	1/10
alpine white	**2240 W-54**	2CKA006500A0792	1/10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Labelling strip non-illuminable.

Housing [1] [2] [3] [4] [5] with labelling field

Larger installation depth for data communication system
suitable for DCS base 1850 built-in ... 1872 built-in and 1876 built-in,
With labelling field.
Labelling field 57.8 x 9.8 mm
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm
Mounting depth: 45 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**1758 WN-53**	2CKA001724A2751	10
alpine white	**1758 WN-54**	2CKA001724A4264	10

[1] Not suitable for DCS base 1874 (built-in), 1875 built-in
[2] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[3] DCS base not included
[4] IP 44 only with closed hinged lid.
[5] Not suited for universal modules 0219.

ocean®
IP 44

Accessories

Empty box [1] [2] [3] with labelling field

Larger installation depth for pilot devices of 22.5 mm diameter.
Standard version
Labelling field 57.8 x 9.8 mm
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm
Mounting depth: 60 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2533 WN-53**	2CKA001724A2752	10
alpine white	**2533 WN-54**	2CKA001724A4281	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] IP 44 only in combination with appropriate control unit
[3] * e.g. of the companies Lumitas, Moeller, Schlegel, Rafi, Elan.

Empty box [1] [2] [3] with labelling field

Larger installation depth for pilot devices of 22.5 mm diameter.
With yellow cover (RAL 1018)
Labelling field 57.8 x 9.8 mm
Protection class (Device): IP 44
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm
Mounting depth: 60 mm

Colour	Type	Order code	Pack/Qty.
grey / blue-green	**2533 WN-15-53**	2CKA001724A2753	10
alpine white	**2533 WN-15-54**	2CKA001724A4282	10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] IP 44 only in combination with appropriate control unit
[3] * e.g. of the companies Lumitas, Moeller, Schlegel, Rafi, Elan.

FI-SCHUKOMAT, SCHUKO® socket outlets [1] [2] [3] with earth leakage circuit breaker

Shuttered.
Waterproof.
Flush-mounted SCHUKOMAT, VDE 0664.
DP cut off (P,N)
Without PE monitoring.
Rated fault current: 30 mA.
With fixing claws.
Rated frequency: 45-60 Hz.
Complete cover, not combinable.
With output terminals for connecting and protecting downsream SCHUKO® socket outlets.
Rated voltage: 230 V~
Rated current: 16 A
Protection class (Device): IP 44
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
alpine white	**3120 EUGB-44**	2CKA003116A0665	1/10

[1] Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.
[2] Terminals suitable for loop through connection.
[3] Increased shock protection .

Cable entry double closed

Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
blue-green	**2134 W-53**	2CKA001761A1487	10
alpine white	**2134 W-54**	2CKA001761A1507	10

Cable entry single open

Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
blue-green	**2136 W-53**	2CKA001761A1489	10
alpine white	**2136 W-54**	2CKA001761A1508	10

Cable bushing adapter plate for coupling several devices

Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
blue-green	**2138 W-53**	2CKA001761A1490	10
alpine white	**2138 W-54**	2CKA001761A1509	10

Cable entry high design

Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
blue-green	**2139 W-53**	2CKA001761A1491	10
alpine white	**2139 W-54**	2CKA001761A1511	10

ocean®
Accessories

Cable entry

For pipes with metric thread M 20 x 1.5.
Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
blue-green	**2137/10 W-53**	2CKA001761A1503	10
alpine white	**2137/10 W-54**	2CKA001761A1512	10

Cable entry

For pipes with 20 mm diameter unthreaded.
Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
blue-green	**2137/11 W-53**	2CKA001761A1506	10
alpine white	**2137/11 W-54**	2CKA001761A1513	10

Cable entry



Trunking dimension: 15 x 15 mm or 15 x 30 mm.
Protection class (Device): IP 44

Colour	Type	Order code	Pack/Qty.
blue-green	**2086 W-53**	2CKA001761A1492	10
alpine white	**2086 W-54**	2CKA001761A1510	10

Label holder [1])

With neutral foil 57.8 x 9.8 mm
for switches and socket outlets in the ocean® program,
Protection class (Device): IP 20
Dimensions: (L x W x D): 44052 mm

Colour	Type	Order code	Pack/Qty.
clear-transparent	**1763-53**	2CKA001799A0882	10

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

Illumination insert [1])

With LED
With optical fibre for uniform illumination of the label holder 1763-53
Rated voltage: 230 V~

Colour	Type	Order code	Pack/Qty.
clear-transparent	**2152 NLI-53**	2CKA001784A0777	1

[1]) For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.

FI-SCHUKOMAT, SCHUKO® socket outlets [1]) [2]) [3]) with earth leakage circuit breaker

Shuttered.
Waterproof.
Surface-mounted SCHUKOMAT, VDE 0664
DP cut off (P,N)
Without PE monitoring.
Rated fault current: 30 mA.
Rated frequency: 45-60 Hz.
With output terminals for connecting and protecting downsream SCHUKO® socket outlets.
Rated voltage: 230 V~
Rated current: 16 A
Protection class (Device): IP 44
Temperature range (Device): -25 °C to 40 °C

Colour	Type	Order code	Pack/Qty.
grey	**3120 EWB-53**	2CKA003116A0664	1

[1]) Protective measure according to VDE 0100; can be proven or checked using the Profitest 0100S testing device, for example.
[2]) Connecting terminals approved in accordance with VDE 0620-1 as connectors.
[3]) Increased shock protection .

Mounting plate

For individual waterproof/tight SM devices.
For fixation with fastening system (fixing screws included in the delivery).
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
metal clad	**2609 WS**	2CKA001716A0042	10

ocean®

Neon lamps, surface-mounted

Glow lamp with connecting cable

Suitable for surface-mounted devices 2601/..., 2621/...
For SM switch/push button, without 2gang 1way.
Rated voltage: 230 V
Rated current: 0.6 mA
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	8332-1	2CKA001784A0016	10

Glow lamp with connecting cable

For SM switch/push button, without 2gang 1way.
Suitable for surface-mounted devices 2601/..., 2621/...
Rated voltage: 230 V
Rated current: 1 mA
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	8346-1	2CKA001784A0321	10

Glow lamp with connecting cable

Suitable for surface-mounted devices 2601/4, 2601/5, 2621/4, 2621/...205-101
For SM 2gang 1way.
Rated voltage: 230 V
Rated current: 0.6 mA
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	8339-1	2CKA001784A0040	100

Glow lamp with E 10 thread for indication lamps

Suitable for flush or surface-mounted devices 2661U, 2661W
For indication lamps.
Rated voltage: 230 V
Rated current: 1.3 mA
Rated current: 1.3 mA

Colour	Type	Order code	Pack/Qty.
	8302	2CKA001780A0022	100

Incandescent lamp with E 10 thread very bright, for indication lamps

Suitable for flush or surface-mounted devices 2661U, 2661W
For indication lamps.
Rated voltage: 240 V
Rated power: 3 W

Rated power: 3 W

Colour	Type	Order code	Pack/Qty.
	8340	2CKA001784A0222	100

Incandescent lamps, surface-mounted

Incandescent lamp with connecting cable

Suitable for surface-mounted devices 2601/..., 2621/...
For SM switch/push button.
Rated voltage: 12 V
Rated current: 40 mA
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	8335-1	2CKA001784A0529	10

Incandescent lamp with connecting cable

Suitable for surface-mounted devices 2601/..., 2621/...
For SM switch/push button.
Rated voltage: 24 V
Rated current: 40 mA
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	8358	2CKA001784A0719	10

Incandescent lamp with connecting cable

Suitable for surface-mounted devices 2601/..., 2621/...
For SM switch/push button, without 2gang 1way.
Rated voltage: 3 V
Rated current: 40 mA
Protection class (Device): IP 20

Colour	Type	Order code	Pack/Qty.
	8333-1	2CKA001784A0024	10

Incandescent lamp with E 10 thread for indication lamps

Suitable for flush or surface-mounted devices 2661U, 2661W
For indication lamps.
Rated voltage: 12 V
Rated power: 1.5 W

Rated power: 1.5 W

Colour	Type	Order code	Pack/Qty.
	8342	2CKA001784A0255	100

Incandescent lamp with E 10 thread for indication lamps

Suitable for flush or surface-mounted devices 2661U, 2661W
For indication lamps.
Rated voltage: 24 V
Rated power: 2 W

Rated power: 2 W

Colour	Type	Order code	Pack/Qty.
	8343	2CKA001784A0263	100

Notes

Movement detector
For the pleasant feeling of safety.

These innovative and high-quality optical detection systems by Busch-Jaeger simply make life more comfortable. They are alert, helpful, efficient. And they automatically manage many tasks in every sector of the building. Inside and outdoors. When it comes to safety, they know precisely when the light is needed. And other functions such as heating, blinds and air-conditioning are precisely, intelligently and reliably controlled.

01 Busch-Watchdog, Studio white 134 RAL9016

02 Busch-Watchdog, Aluminum silver 133 RAL9006

03 Busch-Watchdog, Stainless steel 136

04 Busch-Watchdog, Brown 131 RAL8017

05 Busch-Watchdog, Anthracite 135 RAL7016

06 Busch-Watchdog 180 flex, Withe

07 ABB flexTronic presence detector, sky sensor, studio white matt aluminium silver

08 ABB flexTronic presence detector, corridor sensor, studio white matt aluminium silver

09 Busch-Presence detector compact, Withe

10 Busch-Presence detector flex, Withe

11 Busch-Presence detector KNX, Withe

Movement detector

Selected functions.

Busch-Watchdog PRO Designs

Busch-Watchdog PRO
90° BT
6851/9-13X-500

Busch-Watchdog PRO
220° BT
6851/22-13X-500

Busch-Watchdog PRO
220° select BT
6851/22S-134-500

Busch-Watchdog PRO
280° WL
6251/28-13X-WL-500

Busch-Watchdog PRO
280° free@home
BW-A4.1-1xx

Busch-Watchdog PRO
280° KNX
BM/A4.1-1xx

Corner adapter
Busch-Watchdog PRO
6851/EA-13X-500



Frame
Busch-Watchdog PRO
6851/DR-13X-500

Busch-Watchdog 180 flex Designs

Busch-Watchdog
180 flex,
Standard sensor
with select lens

Busch-Watchdog
180 flex,
Comfort sensor
with select lens

Busch-Watchdog
180 flex,
Multi-sensor

ABB flexTronic
presence detector,
sky sensor

ABB flexTronic
presence detector,
corridor sensor

Busch-Presence detector Designs

Busch-Presence
detector KNX

Busch-Presence
detector compact

Busch-Watchdog
Presence tech
BasicLINE Corridor

Busch-Presence
detector flex, Withe

The Watchdog. For everyone.
Planning

Three axis pivot

Consistently adapted to any installation situation: Featuring three pivots, the Busch-Watchdog PRO can be rotated in any direction for a precisely adjustable detection range. Go with a round or square base to blend in with the architecture, mount it on the wall or ceiling - as you see, it is a truly path-breaking design.

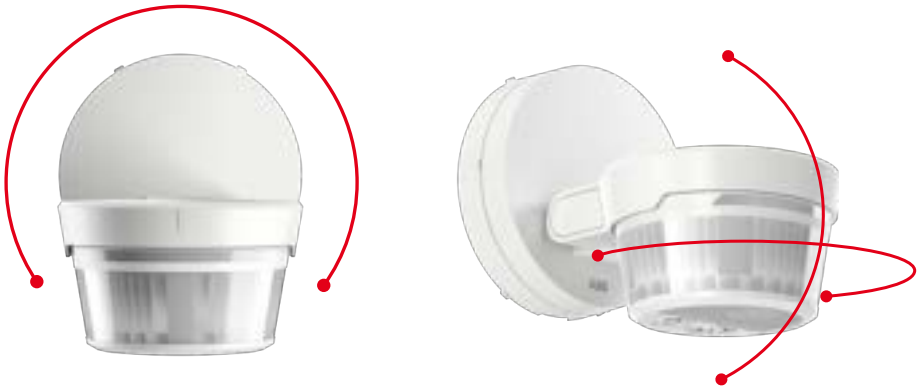

Variable design

Square or round? Surface or corner? The surroundings decide which design will do the best job. The new Busch-Watchdog PRO harmoniously blends into the architecture in any situation, with easy installation and efficient operation.

The Watchdog. For everyone.
Factors

Potentiometer setting

Practical potentiometers on the underside of the Busch-Watchdog PRO are ready for making quick settings during standard commissioning.

App configuration

The Busch-Watchdog PRO can be set even more precisely using the app: Test mode, detection field, sensitivity, switch-on threshold and run-on time.

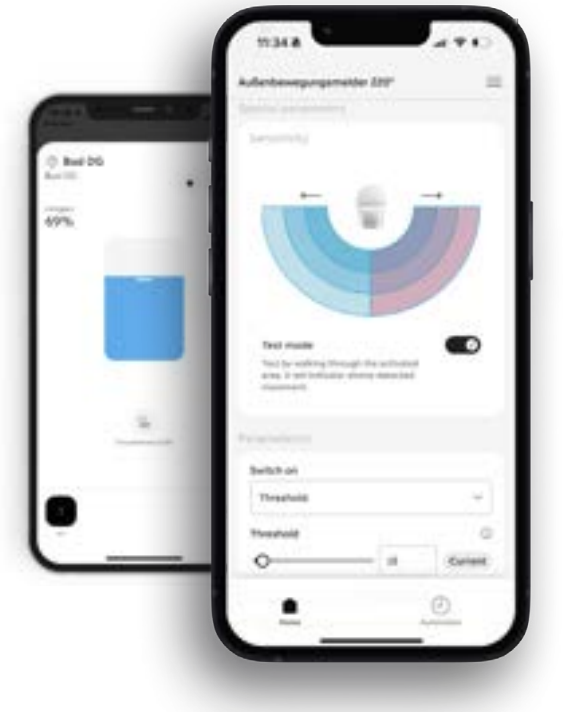

Conventional 90°, 220°, select
The three variants are suited for classic installation. They can also be operated remotely via an app.

Busch-free@home® 280°
Smart integration enables the use of several lighting circuits – providing flexibility for different situations and times of day.

Wireless/Bluetooth 280°
If the Busch-Watchdog is located at a point suitable for detection, e.g. the garage, it can control the lighting in another area, such as the entryway to the house.

KNX 280° Available in Q1 2025
In functional buildings and top-quality residential buildings, the Busch-Watchdog can optimize motion detection by precisely setting brightness, temperature and twilight values.

The Watchdog. For everyone.
Perspectives

Three mounting options create maximum freedom for any architecture: Single-point mount, ceiling mount, corner mount. The stable design ensures precisely defined detection ranges and consistently clean switching in the long term.

Single-point mounting



Balanced wall mounting.
If a building is located on a hill or a slope, you can easily optimize the coverage area: The Busch-Watchdog PRO is mounted using a stylish matching bracket which you can precisely adjust to the topography.

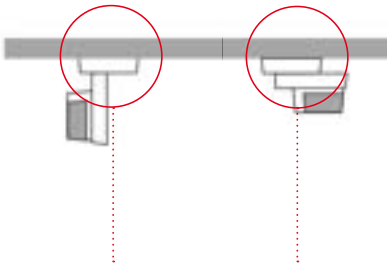

Simplified ceiling installation.
The Busch-Watchdog PRO can be mounted directly on the ceiling without the need for any additional components. The pivot enables precise adjustment to accommodate a wide range of installation options: from the small canopy over a front door to a large warehouse.



Flexible angled mounting.
Certain types of architecture come with special requirements. The Busch-Watchdog can also be mounted on diagonal surfaces and still be precisely aligned: it provides variability for all types of pitched roofs.



Comprehensive corner mounting.
The Busch-Watchdog PRO 280° detects surfaces in two directions, providing detail for two façade areas and for surrounding areas. The perfectly fitting corner bracket is seamlessly integrated into the design: aesthetically appealing technology for seamless sensitivity.

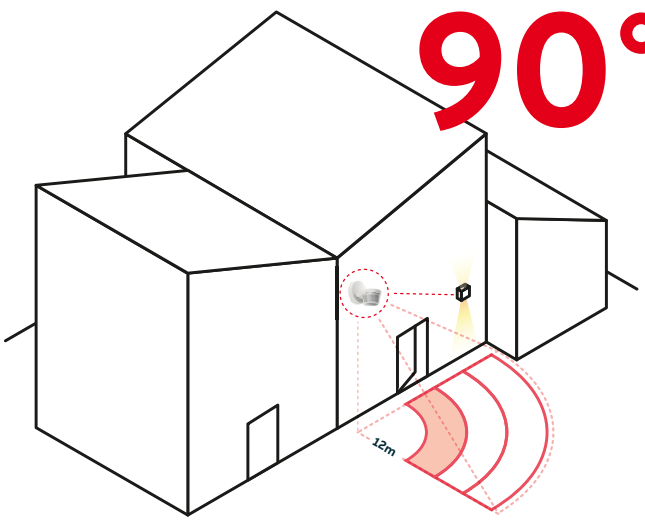

Busch-Watchdog PRO

Precise, definable, appropriate - the perfect solution for townhouses.
Versatile coverage zone:
- ✔ frontal up to 16 m
- ✔ can be reduced horizontally to 8.5m
- ✔ can be reduced by changing the angle or via the app
- ✔ with clear coverage indication
- ✔ with fast switching relay

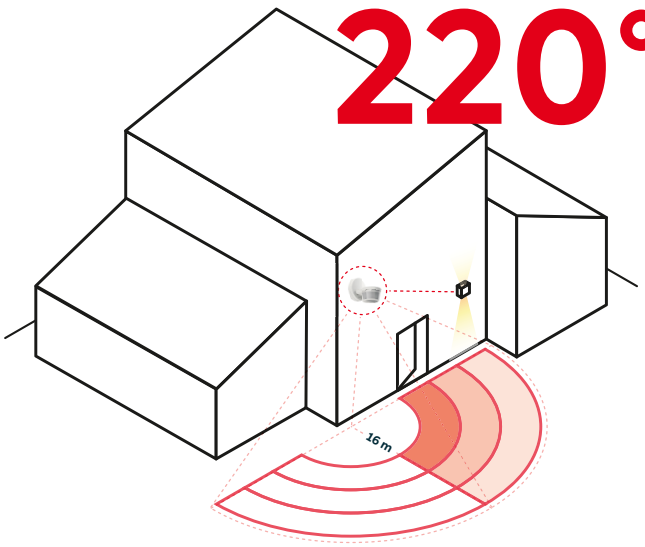

Busch-Watchdog PRO 220° BT

Far-sighted, precise, responsive - the ideal solution for larger buildings.
Versatile coverage zone:
- ✔ radial up to 16 m
- ✔ horizontal up to 32 m
- ✔ plus sensitive rear field coverage
- ✔ with clear coverage indication
- ✔ with fast switching relay

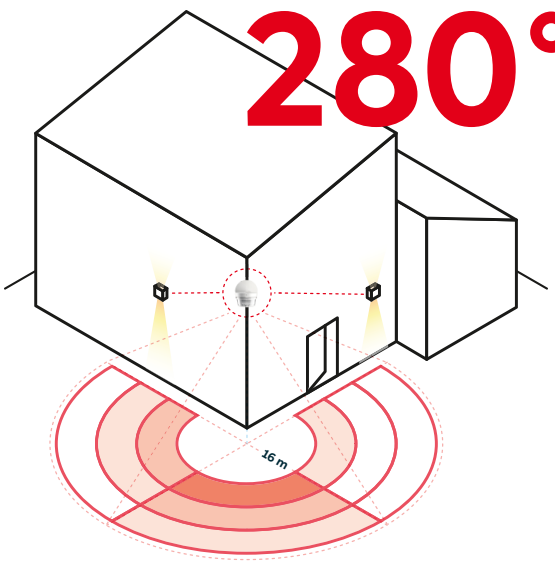

Busch-Watchdog PRO WI/f@h/KNX

Around corners, wide-ranging, clear-sighted - a first-class solution for angled architecture.
Versatile coverage zone:
- ✔ center up to 16 m
- ✔ in any direction up to 32 m
- ✔ plus sensitive rear field coverage
- ✔ with clear coverage indication
- ✔ with fast switching relay

The Watchdog. For everyone.
Styles

Consistently adapted to any installation situation: Featuring three pivots, the Busch-Watchdog PRO can be rotated in any direction for a precisely adjustable detection range. Go with a round or square base to blend in with the architecture, mount it on the wall or ceiling - as you see, it is a truly path-breaking design.

Up-to-date in line with architectural trends.

The Busch-Watchdog PRO simply suits any style: 19th century architecture, white modernist façades, even the rediscovered brutalism style, light glass architecture as well as solid clinker brick façades or any type of timber construction.

Shaping the style for the future.

A façade has many details, and this includes the Busch-Watchdog PRO. The color tones have been adapted to the Busch-Jaeger product range: The brown tone is now darker to keep with the times, while the silver is lighter. Everything is matched to the door communication system with Busch-Welcome®. Good style is something that especially stands out at the entryway to the house. The Busch-Watchdog PRO is a fitting example.

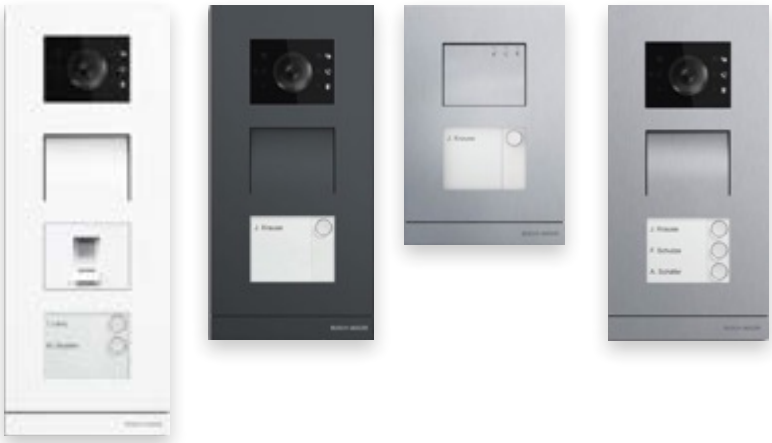

System according to plan
Perfect detection for different applications

The new Busch-Watchdog 180 flex movement detectors combine design, detection quality and flexibility in use.



Setting the switch-off delay pulse operation



Setting the brightness-value threshold/test mode

180-degree lenses
The 180-degree lenses provide perfect detection for different applications. The new Busch-Watchdog sensors are compact and flat. As a result, the movement detectors blend in with the general appearance more discreetly.

Comfort and multi-sensors
The comfort and multi-sensors can also be operated manually above and below the detection lens to switch the light on and off manually if required or to change the intensity of the light in conjunction with a dimmer insert. The operation is familiar and intuitive as with a switch/button operation.

Greater comfort
In addition to an increased selection, the combinable inserts have been technically further developed and offer many new features for reliable and installation-friendly use.

Busch-Watchdog 180 flex,
Standard sensor with select lens

Busch-Watchdog 180 flex,
Comfort sensor with select lens

Busch-Watchdog 180 flex,
Multi-sensor

—
Manual operation of sensors above and below the detection line

Relay insert flex,
1gang
Nominal power:
300 W (LEDi)

Relay insert flex,
2gang
Nominal power:
2x300 W (LEDi)

LED dimmer insert flex,
1gang
Nominal power:
3-240 W/VA (LEDi)

e-contact insert flex,
1gang
Nominal power:
3-240 W/VA (LEDi)

Extension unit insert flex

Flat construction type
25.5 mm

Claw protection
for greater safety

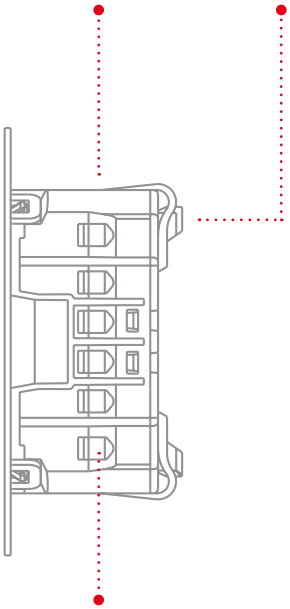

Open clamps also for flexible busbars
for quick mounting

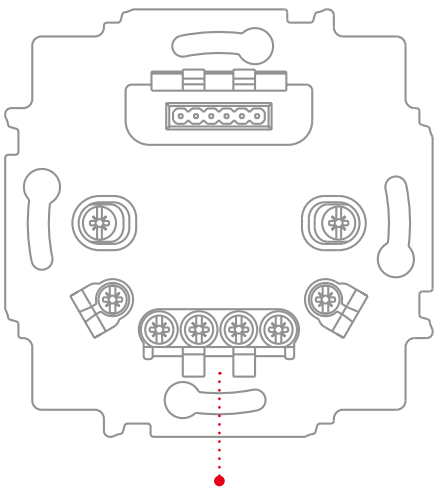

Measuring points accessible from the front
Quick inspection in case of service

Features at a glance

- Fine wire protection: Safe and fast connection of flexible and rigid wires
- Wallpaper compensation: Evens out small unevenness during mounting
- Uniform interface: Many flexible combinations are possible between sensor and actuator
- Extension unit: For operation via conventional push-buttons or connection of the extension unit insert flex

Movement detector

Perfect detection for different applications

Bathroom
Friendly and light in the morning, the atmosphere subdued in the evening and during the night - the demands on the light conditions could barely be more versatile. The Busch-Watchdog 180 flex comfort sensor with the select lense creates an individual light atmosphere with the combination of movement detector and dimmer, and so supports the natural biorhythm.

Stairway
It is the connecting link to our apartments. Although one only spends a brief period of time here, uncomplicated lighting is especially important in the stairway.The hands are full of shopping, in your mind you are aleady on the next floor - but thanks to the Busch-Watchdog 180 flex multi-sensor, there is no irritating switching of the light.

—
01 Busch-Watchdog 180 flex, comfort sensor with select lens
—
02 Busch-Watchdog 180 flex, multi-sensor
—
03 Busch-Watchdog 180 flex, standard with select lens

—
01

—
02

- Personalised light settings, adjusted to the time of day and the situation
- Dimming function supports the natural biorhythm and cares for sustainable power consumption
- Two detection lenses respond exclusively to movements that are created by people and not by inquisitive pets.

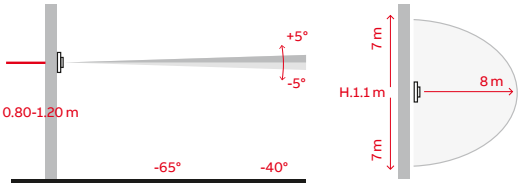

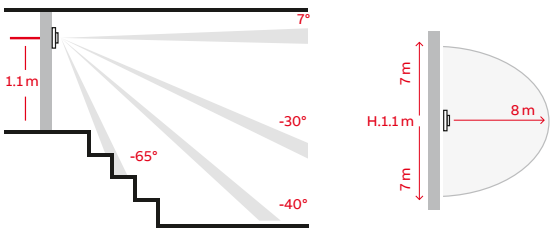

Detection range of multi-lense

- Individual light settings including dimming function
- Four detection levels cover the entire stairway
- Energy-saving effect due to automatic switch-on and switch-off.

Movement detector

Perfect detection for different applications

Corridor

The first impression counts! That is why it is especially difficult to create a welcoming light atmosphere in a rather small corridor. In addition, the switched-on light can be quickly forgotten and turn into a power guzzler. The Busch-Watchdog 180 flex standard with select lense detects the entire corridor area and reacts with a combination of movement detector and lighting.

—
03

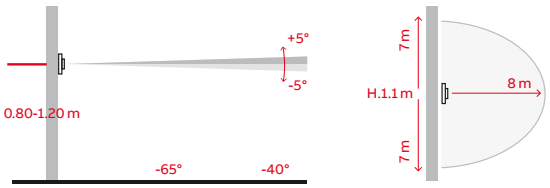

Detection range of select lense

- The horizontal detection level reacts exclusively to persons and not four-footed family members
- Inviting and individual light conditions that can be personalized in the corridor area with dimming function
- Reduction of energy consuption due to automatic switch-on and switch-off

Movement detector

What kinds of detection are available?

The Busch-Watchdog 180 flex is available with two detection lenses. The **select lens** is suitable for corridors or rooms such as tea kitchens where horizontal detection is sufficient or desired, for example, because of pets. It is usually mounted at switch height.

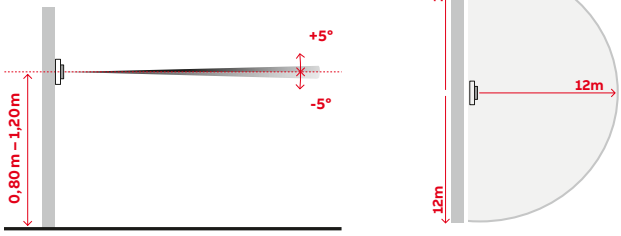

The **multi-lens** offers further areas of application thanks to its four detection levels. For example, this lens can also be used in stairwells. Mounted in the hallway area at 2.2 m, this lens is even better protected from damage and vandalism.

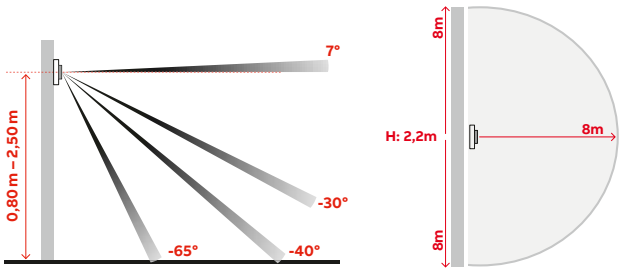

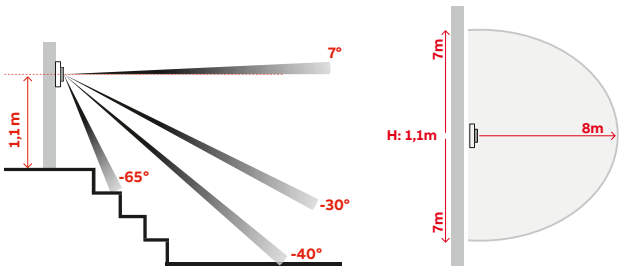

Versatile combination possibilities!

Busch-Watchdog 180 flex, basic sensor with select lens
Article no.: 64761-xxx

Busch-Watchdog 180 flex, basic sensor with select lens
Article no.: 64762-xxx

Busch-Watchdog 180 flex, multi sensor
Article no.: 64764-xxx

Relay insert flex, 1gang
Nominal power: 300 W (LEDi)
Article no.: 64811 U-500

Relay insert flex, 2gang
Nominal power: 2x300 W (LEDi)
Article no.: 64821 U-500

LED dimmer insert flex, 1gang
Nominal power: 3-240 W/VA (LEDi)
Article no.: 64851 U-500

e-contact insert flex, 1gang
Nominal power: 3-240 W/VA (LEDi)
Article no.: 64814 U-500

Extension unit insert flex
Article no.: 64891 U-500

Movement detector

Reliable and uninterrupted surveillance.

Simple and uniform setting of the desired parameters on all Busch-Watchdog lenses on the rear side using two setting potentiometers.



Switching threshold or test mode



Switch-off delay or pulse operation

In addition to the increased selection of combinable inserts, these inserts have been technically further developed and offer many new features for reliable and installation-friendly use.

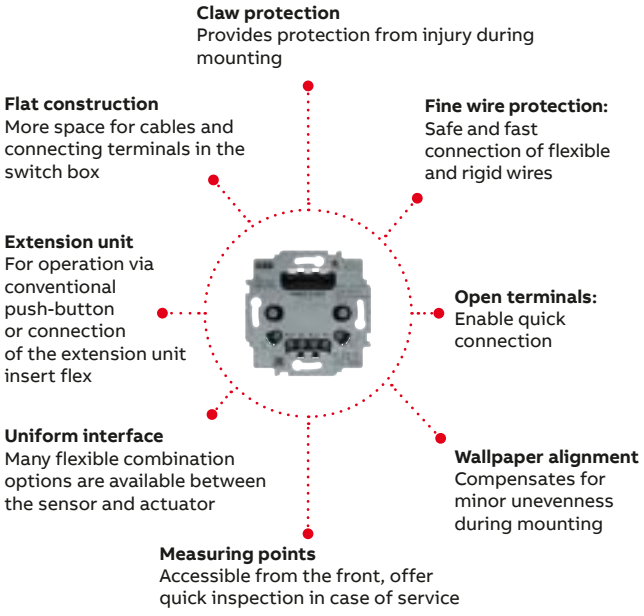

How flexible should YOUR home be?

The new Busch-Watchdog 180 flex movement detectors combine design, detection quality and flexibility in use. The 180-degree lenses provide perfect detection for different applications. The construction size of the new Busch-Watchdog is compact and flat. As a result, the movement detectors blend in with the general appearance more discreetly.

Busch-Watchdog 180 flex, basic sensor

Busch-Watchdog 180 flex, comfort sensor

Busch-Watchdog 180 flex, multi sensor

The **comfort and multi sensors** can also be operated manually above and below the detection lens to switch the light on and off manually if required or to dim it in conjunction with a dimmer. The operation is familiar and intuitive as with a switch/button operation.

Busch-Watchdog 180 flex, comfort sensor

Busch-Watchdog 180 flex, multi sensor

Movement detector

Busch-Presence detectors.

Overview of Busch-Presence detectors.

Presence detectors 230 V AC

Compact devices for almost every application.

Busch-Presence detector flex sensors

Versatile due to modular construction.

Busch-Watchdog Presence tech BasicLINE

For small offices, toilets, pass-through areas and dedicated applications.

Busch-Presence detectors KNX

Expertise always works. Almost unnoticed.

Movement detector

Mounting situations. Ideal solutions for all wall types.

The Busch-Presence detectors can, depending on the model, be used for all popular mounting methods. Necessary accessories are to be obtained either from Busch-Jaeger/ABB or corresponding third-party suppliers.

230 V

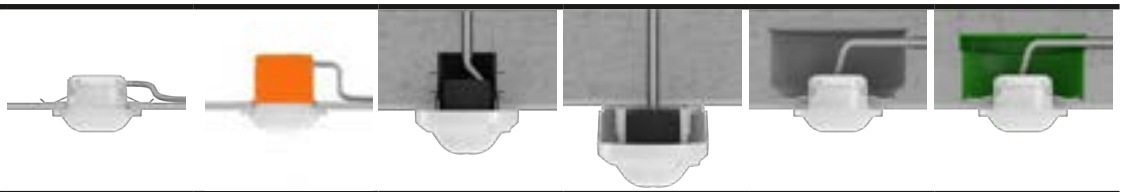

KNX

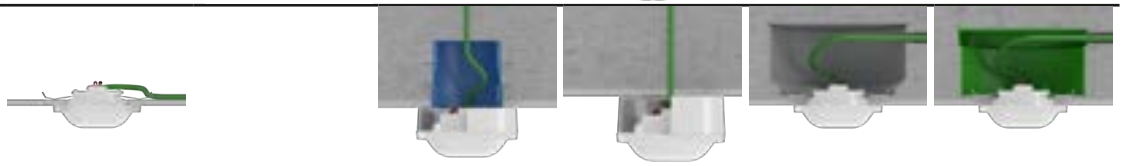

	Mounting situation	Suspended ceiling	Suspended ceiling with hollow wall box	Flush-mounted installation box VDE	Surface mounted	In-situ concrete	Precast concrete slabs
	Notes	Ø 68 mm drill hole diameter	Ø 68 mm drill hole diameter			Mounting via special concrete installation boxes	Mounting via special concrete installation boxes
	Necessary accessories	Suspended ceiling with hollow wall box		KNX: Intermediate ring 6131/38	Surface-mounting box 6883-...-500 or Surface-mounting box 6888 KNX: Surface-mounting box 6131/39	E.g. Kaiser HaloX®-O housing: 1290-40 with fron part 1281-01 or 1281-61	E.g. Kaiser HaloX-P housing with mineral fibre plate 1291-22
	Busch-Watchdog Presence tech BasicLINE mini	END OF LIFE ■	–	–	–	■	–
	Busch-Watchdog Presence tech BasicLINE	END OF LIFE ■	■	■	–	■	■
	Busch-Watchdog Presence tech BasicLINE Corridor	END OF LIFE ■	■	■	■	■	■
	Busch-Presence detector flex sensors	–	■	■	■	■	■
	Busch-Presence detectors 230 V	END OF LIFE ■	–	–	–	■	■
	Busch-Presence detector KNX	■	–	■	■	■	■
	Busch-Presence detector mini KNX	■	–	■	■	■	■

Movement detector

ABB Watchdog Remote control. END OF LIFE

The generation of ABB presence detectors 230 V AC with integrated Bluetooth interface can be remotely controlled and parameterised via a smartphone or tablet APP.
For example the following functions are adjustable:
NOTE: The Busch-Presence detector flex WL sensors will be controlled by the Busch- free@home app.

—
01 Selection of the presence detector to be controlled, via the device list with field strength display and fast identification push button.
—
02 Direct switching and dimming of the connected load
—
03 Energy monitor (rough overview of energy cost with / without presence detectors)
—
04 Sensitivity of sensors
—
05 test mode

—
01

—
02

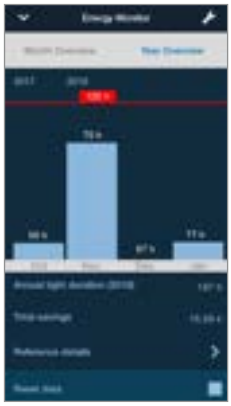

—
03

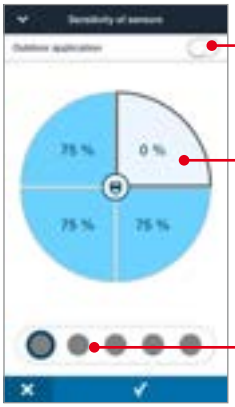

—
04

—
05

—
06 Activation of presence simulation (if you are not at home) / basic brightness and nightlight
—
07 Set device (Bluetooth) name and device parameters
—
08 Release specific functions to user

—
06

—
07

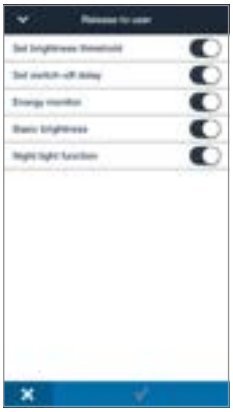

—
08

Movement detector

Busch-Watchdog PRO

Busch-Watchdog PRO 90° BT

NEW

Wireless movement detector detecting thermal motion. Integrated switch actuator. High-quality lens for optimum detection. Level balancing +/- 30° Ground and rear-field detection. Additional switch-on via normally open push-button switch. Potentiometer for the adjustment of standard parameters: Switch-on brightness, Switch-off delay, Test-mode and short-term impulse. Optional: ABB-free@home® next app for commissioning of basic and add-on parameters. Remote Bluetooth operation and smartphone/tablet app. Integrated dismounting protection. Individual detection range adjustment via enclosed protective foil. Brightness-independent test mode. Switch-off delay: 10 sec. to 30 min. or short-time pulse 1 sec. adjustable. Adjustment of standard parameters via app: Switch-on brightness, Switch-off delay, test-mode and short-term impulse. Adjustment of add-on parameters via app: Detection sensitivity, PIR switch-off, takeover of the measured brightness level, permanent on, permanent off. Switch-off delay also programmable via app. With optical indicator for detection and operation mode. Automatic range stabilization. Automatic interference suppression. Automatic dazzle-proofing. Surveillance density: 50 sectors with 200 switching segments. Brightness limiting values: lux range 0.5–1000 or daytime mode. Number of PIR: 1.

Colour	Type	Order code	Pack/Qty.
studio white	**6851/9-134-500**	2CKA006800A3066	1
brown	**6851/9-131-500**	2CKA006800A3062	1
aluminum silver	**6851/9-133-500**	2CKA006800A3064	1
anthracite	**6851/9-135-500**	2CKA006800A3068	1
stainless steel	**6851/9-136-500**	2CKA006800A3070	1

Busch-Watchdog PRO 220° BT

NEW

Wireless movement detector detecting thermal motion. Integrated switch actuator. High-quality lens for optimum detection. Level balancing +/- 30° Ground and rear-field detection. Additional switch-on via normally open push-button switch. Potentiometer for the adjustment of standard parameters: Switch-on brightness, Switch-off delay, Test-mode and short-term impulse. Optional: ABB-free@home® next app for commissioning of basic and add-on parameters. Remote Bluetooth operation and smartphone/tablet app. Integrated dismounting protection. Individual detection range adjustment via enclosed protective foil. Brightness-independent test mode. Switch-off delay: 10 sec. to 30 min. or short-time pulse 1 sec. adjustable. Adjustment of standard parameters via app: Switch-on brightness, Switch-off delay, test-mode and short-term impulse. Adjustment of add-on parameters via app: Detection sensitivity, PIR switch-off, takeover of the measured brightness level, permanent on, permanent off. Switch-off delay also programmable via app. With optical indicator for detection and operation mode. Automatic range stabilization. Automatic interference suppression. Automatic dazzle-proofing. Surveillance density: 50 sectors with 200 switching segments. Brightness limiting values: lux range 0.5–1000 or daytime mode. Number of PIR: 1.

Colour	Type	Order code	Pack/Qty.
studio white	**6851/22-134-500**	2CKA006800A3076	1
brown	**6851/22-131-500**	2CKA006800A3072	1
aluminum silver	**6851/22-133-500**	2CKA006800A3074	1
anthracite	**6851/22-135-500**	2CKA006800A3078	1
stainless steel	**6851/22-136-500**	2CKA006800A3080	1

Busch-Watchdog PRO Select 220° BT

NEW

Wireless movement detector detecting thermal motion. Integrated switch actuator. High-quality lens for optimum detection. Level balancing +/- 30°. Additional switch-on via normally open push-button switch. Potentiometer for the adjustment of standard parameters: Switch-on brightness, Switch-off delay, Test-mode and short-term impulse. Optional: ABB-free@home® next app for commissioning of basic and add-on parameters. Remote Bluetooth operation and smartphone/tablet app. Integrated dismounting protection. Individual detection range adjustment via enclosed protective foil. Brightness-independent test mode. Switch-off delay: 10 sec. to 30 min. or short-time pulse 1 sec. adjustable. Adjustment of standard parameters via app: Switch-on brightness, Switch-off delay, test-mode and short-term impulse. Adjustment of add-on parameters via app: Detection sensitivity, PIR switch-off, takeover of the measured brightness level, permanent on, permanent off. Switch-off delay also programmable via app. With optical indicator for detection and operation mode. Automatic range stabilization. Automatic interference suppression. Automatic dazzle-proofing. Surveillance density: 28 sectors with 112 switching segments. Brightness limiting values: lux range 0.5–1000 or daytime mode. Number of PIR: 2.

Colour	Type	Order code	Pack/Qty.
studio white	**6851/22S-134-500**	2CKA006800A3082	1

Busch-Watchdog PRO 280° WL

NEW

Wireless movement detector detecting thermal motion. Integrated switch actuator. High-quality lens for optimum detection. Level balancing +/- 30° Ground and rear-field detection. Additional switch-on via normally open push-button switch. Potentiometer for the adjustment of standard parameters: Switch-on brightness, Switch-off delay, Test-mode and short-term impulse. Optional: ABB-free@home® next app for commissioning of basic and add-on parameters. Remote Bluetooth operation and smartphone/tablet app. Integrated dismounting protection. Individual detection range adjustment via enclosed protective foil. Brightness-independent test mode. Switch-off delay: 10 sec. to 30 min. or short-time pulse 1 sec. adjustable. Adjustment of standard parameters via app: Switch-on brightness, Switch-off delay, test-mode and short-term impulse. Adjustment of add-on parameters via app: Detection sensitivity, PIR switch-off, takeover of the measured brightness level, permanent on, permanent off. Switch-off delay also programmable via app. With optical indicator for detection and operation mode. Automatic range stabilization. Automatic interference suppression. Automatic dazzle-proofing. Surveillance density: 50 sectors with 200 switching segments. Brightness limiting values: lux range 0.5–1000 or daytime mode. Number of PIR: 1.

Colour	Type	Order code	Pack/Qty.
studio white	**6251/28-134-WL-500**	2CKA006200A0862	1
brown	**6251/28-131-WL-500**	2CKA006200A0858	1
aluminum silver	**6251/28-133-WL-500**	2CKA006200A0860	1
anthracite	**6251/28-135-WL-500**	2CKA006200A0864	1
stainless steel	**6251/28-136-WL-500**	2CKA006200A0866	1

Movement detector

Busch-Watchdog PRO

Busch-Watchdog PRO 280° f@h

NEW

Wireless movement detector detecting thermal motion. Integrated switch actuator. High-quality lens for optimum detection. Level balancing +/- 30° Ground and rear-field detection. Additional switch-on via normally open push-button switch. Potentiometer for the adjustment of standard parameters: Switch-on brightness, Switch-off delay, Test-mode and short-term impulse. Optional: ABB-free@home® next app for commissioning of basic and add-on parameters. Remote Bluetooth operation and smartphone/tablet app. Integrated dismounting protection. Individual detection range adjustment via enclosed protective foil. Brightness-independent test mode. Switch-off delay: 10 sec. to 30 min. or short-time pulse 1 sec. adjustable. Adjustment of standard parameters via app: Switch-on brightness, Switch-off delay, test-mode and short-term impulse. Adjustment of add-on parameters via app: Detection sensitivity, PIR switch-off, takeover of the measured brightness level, permanent on, permanent off. Switch-off delay also programmable via app. With optical indicator for detection and operation mode. Automatic range stabilization. Automatic interference suppression. Automatic dazzle-proofing. Surveillance density: 50 sectors with 200 switching segments. Brightness limiting values: lux range 0.5–1000 or daytime mode. Number of PIR: 1.

Colour	Type	Order code	Pack/Qty.
studio white	**BW-A4.1-134**	2CKA006220A0912	1
brown	**BW-A4.1-131**	2CKA006220A0910	1
aluminum silver	**BW-A4.1-133**	2CKA006220A0911	1
anthracite	**BW-A4.1-135**	2CKA006220A0913	1
stainless steel	**BW-A4.1-136**	2CKA006220A0914	1

Busch-Watchdog PRO 280° KNX

NEW

Wireless movement detector detecting thermal motion. Integrated switch actuator. High-quality lens for optimum detection. Level balancing +/- 30° Ground and rear-field detection. Additional switch-on via normally open push-button switch. Potentiometer for the adjustment of standard parameters: Switch-on brightness, Switch-off delay, Test-mode and short-term impulse. Optional: ABB-free@home® next app for commissioning of basic and add-on parameters. Remote Bluetooth operation and smartphone/tablet app. Integrated dismounting protection. Individual detection range adjustment via enclosed protective foil. Brightness-independent test mode. Switch-off delay: 10 sec. to 30 min. or short-time pulse 1 sec. adjustable. Adjustment of standard parameters via app: Switch-on brightness, Switch-off delay, test-mode and short-term impulse. Adjustment of add-on parameters via app: Detection sensitivity, PIR switch-off, takeover of the measured brightness level, permanent on, permanent off. Switch-off delay also programmable via app. With optical indicator for detection and operation mode. Automatic range stabilization. Automatic interference suppression. Automatic dazzle-proofing. Surveillance density: 50 sectors with 200 switching segments. Brightness limiting values: lux range 0.5–1000 or daytime mode. Number of PIR: 1.

Colour	Type	Order code	Pack/Qty.
studio white	**BM/A4.1-131**	2CKA006132A0425	1
brown	**BM/A4.1-133**	2CKA006132A0426	1
aluminum silver	**BM/A4.1-134**	2CKA006132A0427	1
anthracite	**BM/A4.1-135**	2CKA006132A0428	1
stainless steel	**BM/A4.1-136**	2CKA006132A0429	1

Accessories

Busch-Watchdog PRO corner adapter

NEW

For detection on two sides of the house, in combination with Busch-Watchdog® PRO 280. It is mounted at the corner of the house, on the wall. For flush or surface cable entries.

Colour	Type	Order code	Pack/Qty.
studio white	**6851/EA-134-500**	2CKA006800A3088	1
brown	**6851/EA-131-500**	2CKA006800A3084	1
aluminum silver	**6851/EA-133-500**	2CKA006800A3086	1
anthracite	**6851/EA-135-500**	2CKA006800A3090	1
stainless steel	**6851/EA-136-500**	2CKA006800A3092	1

Busch-Watchdog PRO design frame

NEW

Design frame for square and cubic design.
For combination with all devices of Busch-Watchdog® PRO series. After wall mounted installation of the detector, the design frame could be putted over the Watchdog.
The design frame is fixed via Snap-On mechanism.
Optional accessories. Retrofit installation possible.

Colour	Type	Order code	Pack/Qty.
studio white	**6851/DR-134-500**	2CKA006800A3098	1
brown	**6851/DR-131-500**	2CKA006800A3094	1
aluminum silver	**6851/DR-133-500**	2CKA006800A3096	1
anthracite	**6851/DR-135-500**	2CKA006800A3100	1
stainless steel	**6851/DR-136-500**	2CKA006800A3102	1

Busch-Watchdog Presence tech BasicLINE [1)]

Electronic movement detector for detecting thermal motion.
With ground surveillance.
Continuously variable detection sensitivity.
Additional possibility for switch-on via normally open push-button switch.
Switch-off delay: 1 to 10 min., adjustable.
With brightness-independent test mode for evaluating the detection zone.
Rated voltage: 230 V~, +10 % / -10 %.
Rated frequency: 50 Hz.
Outputs: 1x Normally open contact, potential-bound.
Suitable for: 230 V- LEDi, typical.
Rated power: 300 W.
Suitable for: 230 V incandescent lamps.
Rated power: 2000 W.
Suitable for: 230 V halogen lamps.
Rated power: 2000 W.
Detection range: frontal: 12 m, lateral: 12 m.
Detection angle: 240°.
Brightness limit value: 10 Lux - 200 Lux, Daytime operation.
Mounting height: 2.5 m
Protection class (Device): IP 55.
Temperature range (Device): -20 °C to 40 °C.
Dimensions: (L x W x D): 95 mm x 76 mm x 118 mm.
LEDi

Colour	Type	Order code	Pack/Qty.
alpine white	**6844 AGM-204-500**	2CKA006800A2507	1

Movement detector

Presence detector

Busch-Watchdog Presence tech BasicLINE mini [1] [2]

END OF LIFE

For switching lighting systems that depend on brightness and movement.
Detection range (installation height 3m, up to 6m in diameter).
Low mounting height due to separate sensor/actuator concept.
Continuously variable detection sensitivity.
With brightness-independent test mode for evaluating the detection zone.
With detection display in test mode.
Ceiling installation using integrated spring bracket.
Surveillance density: 19 sectors with 76 switching segments.
Switch-off delay: approx. 1 sec - 15 min or short-time pulse adjustable.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 2000 W
Suitable for: Energy-saving bulbs
Rated power: 7 - 400 W
Suitable for: Fluorescent lamps
Rated current: 4 AX, cos ϕ 0.5
Rated power: 1000 W/VA
Detection angle: 360 °
Brightness limit value: 10 Lux - 1000 Lux , Daytime operation
Mounting height: 2 m - 5 m
Protection class (Device): IP 20
Protection class (Sensor): IP 40
Temperature range (Device): 0 °C to 45 °C
Mounting depth: 77 mmIEC 60669-2-1



Colour	Type	Order code	Pack/Qty.
alpine white	**6811 EB-500**	2CKA006800A2517	1

[1] When mounting the actuator through the drilled hole of the sensor an installation depth of ≥ 205 mm is to be taken into account.
[2] In combination with a relay/contactor, an RC suppressor 6899 has to be used.

Busch-Watchdog Presence tech BasicLINE [1] [2]

END OF LIFE

For switching lighting systems that depend on brightness and movement.
Detection range (for installation height of 3 m), circular, up to 8 m in diameter.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
Adaptation of the detection range possible using the included masking elements.
With brightness-independent test mode for evaluating the detection zone.
With detection display in test mode.
Mounting possibility in combination with built-in installation boxes and device sockets.
Ceiling installation using integrated spring bracket.
Adjustment elements accessible on the front side.
Low mounting height (31 mm)
Surveillance density: 32 sectors with 128 switching segments.
Switch-off delay: approx. 5 sec - 30 min or short-time pulse adjustable.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 2000 W
Suitable for: Energy-saving bulbs
Rated power: 7 - 400 W
Suitable for: Fluorescent lamps
Rated current: 4 AX, cos ϕ 0.5
Rated power: 1000 W/VA
Detection angle: 360 °
Brightness limit value: 10 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): 0 °C to 45 °C
Dimensions: (L x W x D): 111 mm x 111 mm x 59 mm
Mounting depth: 41 mm60669-2-1

Colour	Type	Order code	Pack/Qty.
alpine white	**6814 U-500**	2CKA006800A2518	1/24

[1] The detection range with a central approach is reduced.
[2] In combination with a relay/contactor, an RC suppressor 6899 has to be used.

Movement detector

Presence detector

Busch-Watchdog Presence tech BasicLINE Corridor [1] [2] [3]

END OF LIFE

For switching lighting systems that depend on brightness and movement.
Detection range (for installation height of 2.5 m, circular, up to 24 m in diameter).
Additional activation/deactivation possibility through pushbutton input.
Adaptation of the detection range possible using the included masking elements.
With brightness-independent test mode for evaluating the detection zone.
With detection display in test mode.
With automatic motion detection.
With automatic sensitivity adaptation.
Mounting possibility in combination with built-in installation boxes and device sockets.
Ceiling installation using included dust protection socket.
Adjustment elements accessible on the front side.
Surveillance density: 215 sectors with 860 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse adjustable.
Remote control possible via IR service remote control 6843.
Use outdoors possible due to combination with surface-mounted housing 6888.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 2000 W
Suitable for: Energy-saving bulbs
Rated power: 7 - 400 W
Suitable for: Fluorescent lamps
Rated current: 4 AX, cos ϕ 0.5
Rated power: 1000 W/VA
Detection angle: 360 °
Brightness limit value: 10 Lux - 2000 Lux
Mounting height: 2 m - 3 m
Protection class (Device): IP 40
Temperature range (Device): -20 °C to 45 °C
Dimensions: (L x W x D): 110 mm x 110 mm x 70 mm
Mounting depth: 48 mmIEC 60669-2-1

Colour	Type	Order code	Pack/Qty.
alpine white	**6818 U-500**	2CKA006800A2519	1/18

[1] The maximum detection range depends on the mounting site and ambient conditions.
[2] The detection range with a central approach is reduced.
[3] In combination with a relay/contactor, an RC suppressor 6899 has to be used.

Surface-mounting box

END OF LIFE

For Busch-Watchdog Presence tech BasicLINE Corridor 6818 U.
For surface mounting and increase of the protection type.
Protection class (Device): IP 54
Temperature range (Device): -20 °C to 45 °C
Dimensions: (L x W x D): 106 mm x 106 mm x 26 mm

Colour	Type	Order code	Pack/Qty.
alpine white	**6888**	2CKA006899A2305	1/90

Protective basket

For Busch-Presence detector sensors 6813- to -102.
For Busch-Watchdog Presence tech BasicLINE 6814 U. For Busch-Watchdog Presence tech BasicLINE Corridor 6818 U. For all Busch-Smoke alarm detectors ProfessionalLINE. For all Busch-Heat alarm detectors ProfessionalLINE. Busch-Smoke alarm detector 6831-84 and 6832-84. For Busch-Presence detector mini KNX 6131/20-xxx and 6131/21-xxx.
For Busch-Presence detector KNX 6131/30-xxx and 6131/31-xxx. For Busch-Watchdog Sky KNX 6131/40-24.
For Busch-Presence detector Corridor KNX 6131/50-xxx and 6131/51-xxx.

Colour	Type	Order code	Pack/Qty.
alpine white	**6898**	2CKA006899A2304	1/12

IR service remote control [1]

For Busch-Watchdog Presence tech BasicLINE Corridor 6818 U. The following functions/settings can be implemented. Continuous light on/off (8 h).
Setting of the brightness limit value.
Setting of the current ambient light value as the brightness limit value. Setting of switch-off delay or short-time pulse.
Saving and duplication of the saved values.
Activate test mode. Reset to factory default settings.
Activation/deactivation of the button lock.
Power supply: lithium button cell battery Type CR2032.
Range: frontal 3 m. Battery included in delivery.

Colour	Type	Order code	Pack/Qty.
	6843	2CKA006800A2511	1/120

[1] Battery included in delivery.

Movement detector

Presence detector

Busch-Presence detector Compact, relay [1] [2] [3]
8 metres

END OF LIFE

Master presence detector with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
With power relays for LED operation.
Detection range (for installation height of 3 m): circular
Seated persons: up to Ø 6.5 m, walking persons: up to Ø 8 m.
Extension of the detection range by means of master/slave combination.
Visible height 23 mm.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/continuous off function (8 hours), activation via intelligent extension unit input possible.
With brightness-independent test mode for evaluating the detection zone.
With teach-in function of the brightness switching threshold, IR service remote control required.
With detection display in test mode.
Ceiling installation using integrated spring bracket.
Twist protection via additional quick tensioning.
Adjustment elements accessible on the front side.
Surveillance density: 48 sectors with 496 switching segments.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse adjustable.
Remote control possible via IR service remote control 6843.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED detection and status indication.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 2300 W
Suitable for: 230 V~ LEDi
Rated power: 200 W/VA
Suitable for: Fluorescent lamps
Rated current: 10 AX, cos ϕ 0.9
Detection angle: 360 °
Brightness limit value: 5 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 72 mm
Mounting depth: 49 mm60669-2-1



Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/60-24-500**	2CKA006800A2733	1
aluminium silver	**6819/60-183-500**	2CKA006800A2767	1

[1] The detection range with a central approach is reduced.
[2] In combination with a relay/contactor, an RC suppressor 6899 has to be used.
[3] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Busch-Presence detector Universal, relay [1] [2] [3]
12 meters

END OF LIFE

Master presence detector with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
With power relays for LED operation.
Detection range (for installation height of 3 m): circular
Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m.
Extension of the detection range by means of master/slave combination.
Visible height 23 mm.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/continuous off function (8 hours), activation via intelligent extension unit input possible.
With brightness-independent test mode for evaluating the detection zone.
With teach-in function of the brightness switching threshold, IR service remote control required.
With detection display in test mode.
Ceiling installation using integrated spring bracket.
Twist protection via additional quick tensioning.
Adjustment elements accessible on the front side.
Surveillance density: 72 sectors with 640 switching segments.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse adjustable.
Remote control possible via IR service remote control 6843.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED detection and status indication.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 2300 W
Suitable for: 230 V~ LEDi
Rated power: 200 W/VA
Suitable for: Fluorescent lamps
Rated current: 10 AX, cos ϕ 0.9
Detection angle: 360 °
Brightness limit value: 5 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 72 mm
Mounting depth: 49 mm60669-2-1



Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/30-24-500**	2CKA006800A2735	1
aluminium silver	**6819/30-183-500**	2CKA006800A2769	1

[1] The detection range with a central approach is reduced.
[2] In combination with a relay/contactor, an RC suppressor 6899 has to be used.
[3] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Movement detector

Presence detector

Busch-Presence detector Compact, e-contact [1] [2]
8 metres

END OF LIFE

Master presence detector with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
With electronic switch contact for LED operation.
Detection range (for installation height of 3 m): circular
Seated persons: up to Ø 6.5 m, walking persons: up to Ø 8 m.
Extension of the detection range by means of master/slave combination.
Visible height 23 mm.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/continuous off function (8 hours), activation via intelligent extension unit input possible.
With brightness-independent test mode for evaluating the detection zone.
With teach-in function of the brightness switching threshold, IR service remote control required.
With detection display in test mode.
Ceiling installation using integrated spring bracket.
Twist protection via additional quick tensioning.
Adjustment elements accessible on the front side.
Surveillance density: 48 sectors with 496 switching segments.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse adjustable.
Remote control possible via IR service remote control 6843.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED detection and status indication.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 3 - 200 W
Suitable for: 230 V~ LEDi
Rated power: 3 - 200 W/VA
Detection angle: 360 °
Brightness limit value: 5 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 59 mm
Mounting depth: 36 mm60669-2-1



Colour	Type	Order code	Pack/Qty.
studio white matt	**6817/62-24-500**	2CKA006800A2737	1
aluminium silver	**6817/62-183-500**	2CKA006800A2771	1

[1] The detection range with a central approach is reduced.
[2] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Busch-Presence detector Universal, e-contact [1] [2]
12 meters

END OF LIFE

Master presence detector with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
With electronic switch contact for LED operation.
Detection range (for installation height of 3 m): circular
Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m.
Extension of the detection range by means of master/slave combination.
Visible height 23 mm.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/continuous off function (8 hours), activation via intelligent extension unit input possible.
With brightness-independent test mode for evaluating the detection zone.
With teach-in function of the brightness switching threshold, IR service remote control required.
With detection display in test mode.
Ceiling installation using integrated spring bracket.
Twist protection via additional quick tensioning.
Adjustment elements accessible on the front side.
Surveillance density: 72 sectors with 640 switching segments.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse adjustable.
Remote control possible via IR service remote control 6843.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED detection and status indication.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 3 - 200 W
Suitable for: 230 V~ LEDi
Rated power: 3 - 200 W/VA
Detection angle: 360 °
Brightness limit value: 5 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 59 mm
Mounting depth: 36 mm60669-2-1



Colour	Type	Order code	Pack/Qty.
studio white matt	**6817/32-24-500**	2CKA006800A2739	1
aluminium silver	**6817/32-183-500**	2CKA006800A2773	1

[1] The detection range with a central approach is reduced.
[2] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Movement detector

Presence detector

Busch-Presence detector Corridor, relay [1] [2]
24 meters

END OF LIFE

Master presence detector with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
With power relays for LED operation.
Detection range (for installation height of 3 m): rectangular
Walking persons: crosswise to the detector 24 m x 3 m, frontal/lengthways to the detector 14 m x 3 m.
Extension of the detection range by means of master/slave combination.
Mounting height 27 mm.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/continuous off function (8 hours), activation via intelligent extension unit input possible.
With brightness-independent test mode for evaluating the detection zone.
With teach-in function of the brightness switching threshold, IR service remote control required.
With detection display in test mode.
Ceiling installation using integrated spring bracket.
Twist protection via additional quick tensioning.
Adjustment elements accessible on the front side.
Surveillance density: 92 sectors with 368 switching segments
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse adjustable.
Remote control possible via IR service remote control 6843.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED detection and status indication.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 2300 W
Suitable for: 230 V~ LEDi
Rated power: 200 W/VA
Suitable for: Fluorescent lamps
Rated current: 10 AX, cos ϕ 0.9
Detection angle: 360 °
Brightness limit value: 5 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 76 mm
Mounting depth: 49 mm60669-2-1



Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/50-24-500**	2CKA006800A2797	1
aluminium silver	**6819/50-183-500**	2CKA006800A2799	1

[1] In combination with a relay/contactor, an RC suppressor 6899 has to be used.
[2] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Busch-Presence detector Universal BT, relay [1] [2] [3] [4]
12 meters

END OF LIFE

Master presence detector with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
With Bluetooth interface for parameterization and operation.
Adjustment of all setting options via smartphone or tablet.
Light control via smartphone or tablet app.
With power relays for LED operation.
Detection range (for installation height of 3 m): circular
Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m.
Extension of the detection range by means of master/slave combination.
Visible height 23 mm.
For semi-automatic, comfort and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/continuous off function (8 hours), activation via intelligent extension unit input possible.
With selectable presence simulation in case of non-presence. With integrated storage of ON period (energy monitor). With brightness-independent test mode for evaluating the detection zone.
With detection display in test mode.
Ceiling installation using integrated spring bracket.
Twist protection via additional quick tensioning.
Adjustment elements accessible on the front side.
Surveillance density: 72 sectors with 640 switching segments. Individual deactivation and adjustment of sensitivity of individual sensors possible.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse adjustable. With selectable dynamic switch-off delay. Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED detection and status indication.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 2300 W
Suitable for: 230 V~ LEDi
Rated power: 200 W/VA
Suitable for: Fluorescent lamps
Rated current: 10 AX, cos ϕ 0.9
Detection angle: 360 °
Brightness limit value: 5 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 72 mm
Mounting depth: 49 mm60669-2-1

Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/31-24-500**	2CKA006800A2741	1
aluminium silver	**6819/31-183-500**	2CKA006800A2775	1

[1] The detection range with a central approach is reduced.
[2] In combination with a relay/contactor, an RC suppressor 6899 has to be used.
[3] Free app for iOS and Android available in the App Store or Play Store.
[4] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Movement detector

Presence detector

Busch-Presence detector Universal BT, e-contact [1] [2] [3] 12 meters

END OF LIFE

Master presence detector with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
With Bluetooth interface for parameterization and operation.
Adjustment of all setting options via smartphone or tablet.
Light control via smartphone or tablet app.
With electronic switch contact for LED operation.
With selectable soft ON/OFF function.
Detection range (for installation height of 3 m): circular
Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m.
Extension of the detection range by means of master/slave combination.
Visible height 23 mm.
For semi-automatic, comfort and fully automatic operation. Additional activation/deactivation possibility through pushbutton input.
With continuous light/continuous off function (8 hours), activation via intelligent extension unit input possible.
With selectable presence simulation in case of non-presence. With integrated storage of ON period (energy monitor). With brightness-independent test mode for evaluating the detection zone.
With detection display in test mode.
Ceiling installation using integrated spring bracket.
Twist protection via additional quick tensioning.
Adjustment elements accessible on the front side.
Surveillance density: 72 sectors with 640 switching segments. Individual deactivation and adjustment of sensitivity of individual sensors possible.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse adjustable.
With selectable dynamic switch-off delay.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED detection and status indication.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 3 - 200 W
Suitable for: 230 V~ LEDi
Rated power: 3 - 200 W/VA
Detection angle: 360 °
Brightness limit value: 5 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 59 mm
Mounting depth: 36 mm60669-2-1

Bluetooth APP LEDi

Colour	Type	Order code	Pack/Qty.
studio white matt	**6817/33-24-500**	2CKA006800A2743	1
aluminium silver	**6817/33-183-500**	2CKA006800A2777	1

[1] The detection range with a central approach is reduced.
[2] Free app for iOS and Android available in the App Store or Play Store.
[3] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Busch-Presence detector Universal BT, e-contact with sealing ring [1] [2] [3] 12 meters

END OF LIFE

Master presence detector with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
With Bluetooth interface for parameterization and operation.
Adjustment of all setting options via smartphone or tablet.
Light control via smartphone or tablet app.
With electronic switch contact for LED operation.
With selectable soft ON/OFF function.
Detection range (for installation height of 3 m): circular
Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m.
Extension of the detection range by means of master/slave combination. Visible height 23 mm.
For semi-automatic, comfort and fully automatic operation. Additional activation/deactivation possibility through pushbutton input. With continuous light/continuous off function (8 hours), activation via intelligent extension unit input possible.
With selectable presence simulation in case of non-presence. With integrated storage of ON period (energy monitor). With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Ceiling installation using integrated spring bracket. Twist protection via additional quick tensioning. Adjustment elements accessible on the front side. Surveillance density: 72 sectors with 640 switching segments.
Individual deactivation and adjustment of sensitivity of individual sensors possible.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse adjustable.
With selectable dynamic switch-off delay.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED detection and status indication.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 3 - 200 W
Suitable for: 230 V~ LEDi
Rated power: 3 - 200 W/VA
Detection angle: 360 °
Brightness limit value: 5 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 41
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 59 mm
Mounting depth: 36 mm60669-2-1

Bluetooth APP LEDi

Colour	Type	Order code	Pack/Qty.
alpine white	**6817/93-204-500**	2CKA006800A2803	1
aluminium silver	**6817/93-183-500**	2CKA006800A2805	1

[1] The detection range with a central approach is reduced.
[2] Free app for iOS and Android available in the App Store or Play Store.
[3] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Movement detector

Presence detector

Busch-Presence detector Corridor BT, relay [1] [2] [3]
30 metres

END OF LIFE

Master presence detector with mixed light measurement. For switching lighting systems that depend on brightness and movement.
With Bluetooth interface for parameterization and operation. Adjustment of all setting options via smartphone or tablet. Light control via smartphone or tablet app. With power relays for LED operation.
Detection range (for installation height of 3 m): rectangular
Walking persons: crosswise to the detector 30 m x 3 m, frontal 20 m x 3 m.
Extension of the detection range by means of master/slave combination.
Mounting height 27 mm.
For semi-automatic, comfort and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/continuous off function (8 hours), activation via intelligent extension unit input possible.
With selectable presence simulation in case of non-presence.
With integrated storage of ON period (energy monitor).
With brightness-independent test mode for evaluating the detection zone.
With detection display in test mode.
Ceiling installation using integrated spring bracket.
Twist protection via additional quick tensioning.
Adjustment elements accessible on the front side.
Surveillance density: 92 sectors with 368 switching segments. Individual deactivation and adjustment of sensitivity of individual sensors possible.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse adjustable.
With selectable dynamic switch-off delay.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED detection and status indication.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 2300 W
Suitable for: 230 V~ LEDi
Rated power: 200 W/VA
Suitable for: Fluorescent lamps
Rated current: 10 AX, cos ϕ 0.9
Detection angle: 360 °
Brightness limit value: 5 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 76 mm
Mounting depth: 49 mm60669-2-1

Bluetooth APP LEDi

Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/51-24-500**	2CKA006800A2745	1
aluminium silver	**6819/51-183-500**	2CKA006800A2779	1

[1] In combination with a relay/contactor, an RC suppressor 6899 has to be used.
[2] Free app for iOS and Android available in the App Store or Play Store.
[3] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Busch-Presence detector Universal BT, DALI [1] [2] [3] [4]
12 meters

END OF LIFE

Master presence detector with mixed light measurement.
For regulating and switching of DALI operating devices that depend on brightness and movement.
For DALI broadcast operation (central telegram).
Supplies the required voltage for additional DALI operating units and controllers. Suitable for up to 45 DALI operating devices. For changing the colour temperature of "tunable white" lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
With additional switching output for the activation of heating, air conditioning and ventilation or for switching additional loads (e.g. panel light). Configuration possible up to the complete deactivation of the DALI operating devices. With Bluetooth interface for parameterization and operation. Adjustment of all setting options via smartphone or tablet.
Light control via smartphone or tablet app.
Detection range (for installation height of 3 m): circular
Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m.
Extension of the detection range by means of master/slave combination.
Visible height 23 mm.
For semi-automatic, comfort and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/continuous off function (8 hours), activation via intelligent extension unit input possible.
With time-controlled basic illumination function.
With selectable warm-up function for fluorescent lamps.
With 2-step automatic switch-off (according to EnEV / EN 15232).
With time-controlled night anti-glare function.
With selectable presence simulation in case of non-presence.
With integrated storage of ON period (energy monitor).
With brightness-independent test mode for evaluating the detection zone. With teach-in function of the brightness switching threshold, IR service remote control required. With detection display in test mode.
Ceiling installation using integrated spring bracket.
Twist protection via additional quick tensioning.
Adjustment elements accessible on the front side.
Surveillance density: 72 sectors with 640 switching segments.
Individual deactivation and adjustment of sensitivity of individual sensors possible.
Switch-off delay: approx. 1 min. - 30 min. adjustable.
With selectable dynamic switch-off delay.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED detection and status indication.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 1380 W
Suitable for: 230 V~ LEDi
Rated power: 200 W/VA
Suitable for: Fluorescent lamps
Rated current: 6 AX, cos ϕ 0.9
Control/Signal outputs: 1, DALI channels, independent
Rated current: 100 mA
Output voltage: 16 V-
Detection angle: 360 °
Brightness limit value: 5 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 83 mm
Mounting depth: 60 mm60669-2-1

Bluetooth APP DALI LEDi

Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/35-24-500**	2CKA006800A2747	1
aluminium silver	**6819/35-183-500**	2CKA006800A2781	1

[1] The detection range with a central approach is reduced.
[2] In combination with a relay/contactor, an RC suppressor 6899 has to be used.
[3] Free app for iOS and Android available in the App Store or Play Store.
[4] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Movement detector

Presence detector

Busch-Presence detector Corridor BT, DALI [1] [2] [3] 30 metres

Master presence detector with mixed light measurement.
For regulating and switching of DALI operating devices that depend on brightness and movement.
For DALI broadcast operation (central telegram).
Supplies the required voltage for additional DALI operating units and controllers. Suitable for up to 45 DALI operating devices. For changing the colour temperature of "tunable white" lamps, which meet DALI Standard IEC 62386-209 (Device Type 8).
Colour temperature can then be set between 2,700 K - 6,500 K.
With additional switching output for the activation of heating, air conditioning and ventilation or for switching additional loads (e.g. panel light). Configuration possible up to the complete deactivation of the DALI operating devices.
With Bluetooth interface for parameterization and operation.
Adjustment of all setting options via smartphone or tablet.
Light control via smartphone or tablet app.
Detection range (for installation height of 3 m): rectangular
Walking persons: crosswise to the detector 30 m x 3 m, frontal 20 m x 3 m.
Extension of the detection range by means of master/slave combination.
Mounting height 27 mm.
For semi-automatic, comfort and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/continuous off function (8 hours), activation via intelligent extension unit input possible.
With time-controlled basic illumination function.
With selectable warm-up function for fluorescent lamps.
With 2-step automatic switch-off (according to EnEV / EN 15232).
With time-controlled night anti-glare function.
With selectable presence simulation in case of non-presence.
With integrated storage of ON period (energy monitor).
With brightness-independent test mode for evaluating the detection zone. With teach-in function of the brightness switching threshold, IR service remote control required. With detection display in test mode.
Ceiling installation using integrated spring bracket.
Twist protection via additional quick tensioning.
Adjustment elements accessible on the front side.
Surveillance density: 92 sectors with 368 switching segments.
Individual deactivation and adjustment of sensitivity of individual sensors possible.
Switch-off delay: approx. 1 min. - 30 min. adjustable.
With selectable dynamic switch-off delay.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED detection and status indication.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps
Rated power: 1380 W
Suitable for: 230 V~ LEDi
Rated power: 200 W/VA
Suitable for: Fluorescent lamps
Rated current: 6 AX, cos ϕ 0.9
Control/Signal outputs: 1, DALI channels, independent
Rated current: 100 mA
Output voltage: 16 V-
Detection angle: 360 °
Brightness limit value: 5 Lux - 2000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 87 mm
Mounting depth: 60 mm60669-2-1

Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/55-24-500**	2CKA006800A2749	1
aluminium silver	**6819/55-183-500**	2CKA006800A2783	1

[1] In combination with a relay/contactor, an RC suppressor 6899 has to be used.
[2] Free app for iOS and Android available in the App Store or Play Store.
[3] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Busch-Presence detector Compact, slave [1] 8 metres

Slave presence detector for extension of the detection range of master presence detectors. Detection range (for installation height of 3 m): circular. Seated persons: up to Ø 6.5 m, walking persons: up to Ø 8 m.
Visible height 23 mm. Ceiling installation using integrated spring bracket. Twist protection via additional quick tensioning. Surveillance density: 48 sectors with 496 switching segments. Suitable for false ceilings with a board thickness from 9 to 25 mm. Hole size: Ø 68 mm. Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz. Detection angle: 360 °
Mounting height: 2 m - 4 m. Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 72 mm
Mounting depth: 49 mm

Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/68-24-500**	2CKA006800A2751	1
aluminium silver	**6819/68-183-500**	2CKA006800A2785	1

[1] The detection range with a central approach is reduced.

Busch-Presence detector Universal, slave [1] [2] 12 meters

Slave presence detector for extension of the detection range of master presence detectors. Detection range (for installation height of 3 m): circular. Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m. Visible height 23 mm.
Ceiling installation using integrated spring bracket. Twist protection via additional quick tensioning. Surveillance density: 72 sectors with 640 switching segments. Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm. Rated voltage: 110 - 230 V~, +10 % / -10 %.
Rated frequency: 50 Hz - 60 Hz. Detection angle: 360 °
Mounting height: 2 m - 4 m. Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 72 mm
Mounting depth: 49 mm

Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/38-24-500**	2CKA006800A2753	1
aluminium silver	**6819/38-183-500**	2CKA006800A2787	1

[1] The detection range with a central approach is reduced.
[2] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Movement detector

Presence detector

Busch-Presence detector Corridor, slave [1] 24 meters

END OF LIFE

Slave presence detector for extension of the detection range of master presence detectors. Detection range (for installation height of 3 m): rectangular. Walking persons: crosswise to the detector 24 m x 3 m, frontal/lengthways to the detector 14 m x 3 m. Mounting height 27 mm.
Ceiling installation using integrated spring bracket. Twist protection via additional quick tensioning. Surveillance density: 92 sectors with 368 switching segments. Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm. Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz. Detection angle: 360 °
Mounting height: 2 m - 4 m. Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 76 mm
Mounting depth: 49 mm

Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/58-24-500**	2CKA006800A2755	1
aluminium silver	**6819/58-183-500**	2CKA006800A2789	1

[1] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Busch-Presence detector Universal, slave, DALI [1] [2] 12 meters

END OF LIFE

DALI slave presence detector for extension of the detection range of DALI master presence detectors.
For the supply of operating voltage via the DALI master. Power consumption on the DALI bus: max. 10 mA, corresponds to approx. 5 DALI operating devices.
The communication with the DALI master is carried out via the DALI interface. Detection range (for installation height of 3 m): circular. Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m. Visible height 23 mm.
Ceiling installation using integrated spring bracket. Twist protection via additional quick tensioning. Surveillance density: 72 sectors with 640 switching segments. Suitable for false ceilings with a board thickness from 9 to 25 mm. Hole size: Ø 68 mm.
Rated voltage: 95 - 22.5 V-
Detection angle: 360 °
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 72 mm
Mounting depth: 49 mm

DALI

Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/39-24-500**	2CKA006800A2759	1
aluminium silver	**6819/39-183-500**	2CKA006800A2793	1

[1] The detection range with a central approach is reduced.
[2] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Busch-Presence detector Corridor, slave, DALI [1] 30 metres

END OF LIFE

DALI slave presence detector for extension of the detection range of DALI master presence detectors.
For the supply of operating voltage via the DALI master. Power consumption on the DALI bus: max. 10 mA, corresponds to approx. 5 DALI operating devices.
The communication with the DALI master is carried out via the DALI interface. Detection range (for installation height of 3 m): rectangular.
Walking persons: crosswise to the detector 24 m x 3 m, frontal/lengthways to the detector 14 m x 3 m.
Mounting height 27 mm.
Ceiling installation using integrated spring bracket.
Twist protection via additional quick tensioning.
Surveillance density: 92 sectors with 368 switching segments.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Rated voltage: 95 - 22.5 V-
Detection angle: 360 °
Mounting height: 2 m - 4 m
Protection class (Device): IP 40
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 76 mm
Mounting depth: 49 mm

DALI

Colour	Type	Order code	Pack/Qty.
studio white matt	**6819/59-24-500**	2CKA006800A2761	1
aluminium silver	**6819/59-183-500**	2CKA006800A2795	1

[1] Recommendation: HaloX-O flush-mounted box from Kaiser (article no. 1290-40) with corresponding cover (1290-47 or 1290-85 for exposed concrete) or IBTronic H120-68 from Spelsberg

Busch extension unit coupling [1]

END OF LIFE

For transmitting different control commands via a single conductor wire.
For devices with intelligent extension input.
For operation via conventional push-buttons 2020 US and 2021/6 U.
For operation via conventional 2gang push-buttons 2020 US-205 and 2021/6/6 U.
For universal attachment or installation.
For installation in (deep) flush-mounted boxes to German Standard DIN 49073.
Including compact connecting terminal for cable connection.
Cable length: approx. 80 mm.
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Inputs: 2
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 33 mm x 45 mm x 8.5 mm

Colour	Type	Order code	Pack/Qty.
	6494-500	2CKA006499A0002	1

[1] To be mounted only in connection with commercially available flush-mounted installation boxes according to DIN 49073 > 40 mm depth gauge or Busch-Jaeger art. no. 3040, 3050 or 3060.

Movement detector

Presence detector

ABB flexTronics, presence detector

ABB flexTronic presence detector, universal Sensor [1] [2] [3] 12 meters

Presence detector sensor with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
Detection range at mounting height of 3 m: circular.
Seated persons up to Ø 10 m, walking persons up to Ø 12 m.
Extension of the detection range by main unit/ extension unit combination.
On wall / on ceiling height: 35 mm.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/duration-off function (8 hrs), IR service remote control necessary.
With teach-in function of the brightness switching threshold, IR service remote control required.
With brightness-independent test mode for evaluating the detection zone.
With detection LED at test mode.
Remote control possible via IR service remote control 6843.
Adjustment elements accessible on the front side.
Surveillance density: 72 sectors with 640 switching segments.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse.
Compatible with all Busch-flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
The detection range specifications refer to an ambient temperature of 21°C.

Colour	Type	Order code	Pack/Qty.
studio white matt	**64753-24-500**	2CKA006800A3027	1
aluminium silver	**64753-183-500**	2CKA006800A3029	1

[1] The detection range with a central approach is reduced.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Please order the respective flush-mounted insert separately.

ABB flexTronic presence detector flex set with universal sensor and relay insert

Modular presence detector with universal lens (set packaging).
Detection range at mounting height of 3 m: circular.
Seated persons up to Ø 10 m, walking persons up to Ø 12 m.
Consisting of ABB presence detector flex universal sensor, 64753-24-500.
Consisting of relay insert flex, 1-way 64811 U-500.

Colour	Type	Order code	Pack/Qty.
	64753 U-24-500	2CKA006800A3038	1

ABB flexTronic presence detector, sky sensor

Presence detector sensor with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
Detection range at mounting height 6 m: circular.
Walking persons Ø: max. 18 m.
Detection range at mounting height 12 m: circular.
Walking persons Ø: max. 24 m.
Extension of the detection range by main unit/ extension unit combination.
On wall / on ceiling height: 35 mm.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With brightness-independent test mode for evaluating the detection zone.
With detection LED at test mode.
Adjustment elements accessible on the front side.
Surveillance density: 72 sectors with 640 switching segments.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse.
Compatible with all Busch-flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
The detection range specifications refer to an ambient temperature of 21°C.

Colour	Type	Order code	Pack/Qty.
studio white matt	**64754-24-500**	2CKA006800A3031	1
aluminium silver	**64754-183-500**	2CKA006800A3033	1

ABB flexTronic presence detector flex set with sky sensor and relay insert

Modular presence detector with sky lens (set packaging).
Detection range at mounting height of 6 m: circular.
Walking persons up to Ø 18 m.
Detection range at mounting height of 12 m: circular.
Walking persons up to Ø 24 m.
Consisting of ABB presence detector flex sky sensor, 64754-24-500.
Consisting of relay insert flex, 1-way 64811 U-500.

Colour	Type	Order code	Pack/Qty.
	64754 U-24-500	2CKA006800A3039	1

Movement detector

ABB flexTronics, presence detector

ABB flexTronic presence detector, corridor sensor

Presence detector sensor with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
Detection range at mounting height of 3 m: rectangular.
Walking persons: crosswise to the detector 24 m x 3 m, frontal/lengthways to the detector 14 m x 3 m.
Extension of the detection range by main unit/ extension unit combination.
On wall / on ceiling height: 39 mm.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/duration-off function (8 hrs), IR service remote control necessary.
With teach-in function of the brightness switching threshold, IR service remote control required.
With brightness-independent test mode for evaluating the detection zone.
With detection LED at test mode.
Remote control possible via IR service remote control 6843.
Adjustment elements accessible on the front side.
Surveillance density: 92 sectors with 368 switching segments.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse.
Compatible with all Busch-flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
The detection range specifications refer to an ambient temperature of 21°C.

Colour	Type	Order code	Pack/Qty.
studio white matt	**64755-24-500**	2CKA006800A3035	1
aluminium silver	**64755-183-500**	2CKA006800A3037	1

ABB flexTronic presence detector flex set with corridor sensor and relay insert

Modular presence detector with corridor lens (set packaging).
Detection range at mounting height of 3 m: rectangular.
walking persons crosswise to the detector up to 24 m x 3 m / frontal/lengthways to the detector up to 14 m x 3 m.
Consisting of ABB presence detector flex corridor sensor, 64755-24-500.
Consisting of relay insert flex, 1-way 64811 U-500.

Colour	Type	Order code	Pack/Qty.
	64755 U-24-500	2CKA006800A3040	1

Busch-Presence detector Universal, decor frame [1])

Paintable decor frame for individual design.
For presence detectors with Compact and Universal lens.
For ABB flexTronic presence detector sensors with universal and sky lens.
For latching onto the presence detector.
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 23 mm

Colour	Type	Order code	Pack/Qty.
studio white matt	**6889/30-24-500**	2CKA006800A2765	10

[1]) The decor frame included in the scope of delivery of the presence detector must be removed before mounting.

Busch movement detector Corridor, decor frame [1])

Paintable decor frame for individual design.
For presence detector with Corridor lens.
For ABB flexTronic presence detector sensor with corridor lens.
For latching onto the presence detector.
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 27 mm

Colour	Type	Order code	Pack/Qty.
studio white matt	**6889/50-24-500**	2CKA006800A2801	10

[1]) The decor frame included in the scope of delivery of the presence detector must be removed before mounting.

Presence detector surface-mounting housing

For installing a ABB flexTronic insert in combination with the ABB flexTronic presence detector sensor.
Compatible with all flexTronic inserts.
For ABB flexTronic presence detector sensors 6853-...-500, 6854-...-500 and 6855-...-500.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For extension insert flex, 64891 U.
For LED touch dimmer insert flex, 1gang, 64851 U.

Colour	Type	Order code	Pack/Qty.
studio white matt	**6883-24-500**	2CKA006899A2369	1
aluminium silver	**6883-183-500**	2CKA006899A2371	1

Movement detector

ABB flexTronics inserts

Relay insert flex, 1gang [1]

3 wire connection (neutral conductor required).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-500. For Busch-Watchdog 180 flex sensors 6476x-500.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL-500. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~
Rated frequency: 50 Hz
Inputs: 1. Outputs: 1x Normally open contact, potential-bound. Suitable for: 230 V- LEDi, typical, rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via transformers,rated power: 2300 VA.
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Relay insert flex, 2gang [1]

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers. Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Relay insert flex, 1gang [1]

e-contact insert flex, 1gang [1] [2]

2-wire connection (neutral conductor not required) Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA). For switching lighting systems. Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz
Inputs: 1. Outputs: 1x Normally open contact, potential-bound. Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1] Use only dimmable high-voltage LEDs.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Movement detector

ABB flexTronics inserts

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6]
FM, LED, 3-240 VA

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi)
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x dimming channel
Suitable for: 230 V LEDi, typical (leading edge control)
Rated power: 3 - 100 VA
Suitable for: 230 V LEDi, typical (trailing edge control)
Rated power: 3 - 240 W
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Extension insert flex [1]

3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations.
For group control of flex inserts via extension unit communication.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with all flex inserts.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Control/Signal outputs: 1, electronic output, potential-bound
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Movement detector

KNK Presence detector

Busch-Presence detector mini KNX [1]) 8 meters

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular.
Seated persons Ø: max. 5 m, max. 6.5 m and max. 9 m.
Walking persons Ø: max. 6.5 m, max. 8 m and max. 10.5 m.
Visible height 16 mm.
With 2 channels.
Targeted for connection and disconnection of lights bands depending on the room brightness.
Regulation in response to the movement possible.
Using the device as presence and/or movement detectors.
Detectors application with 2 power off stages.
Detectors application with integrated monitoring function.
Constant light switch with up to two independent channels.
Constant light switch with max. 2 outputs for brightness-dependent switching of two light bands in the area.
With integrated KNX bus coupler.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Suitable for surface mounting installation.
Cannot be installed in British Standard or VDE flushmounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1290-40) with corresponding cover plates (1290-47 or 1290-85 for fair faced concrete) or IBTronic H120-68 from Spelsberg.
Connections:
KNX-line: Bus connection terminal
Brightness limit value: 1 Lux - 1000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 45 mm
Mounting depth: 29 mm

Colour	Type	Order code	Pack/Qty.
aluminium silver	**6131/20-183-500**	2CKA006132A0343	1
studio white matt	**6131/20-24-500**	2CKA006132A0342	1

[1]) For software and description please check the current Online-Catalogue.

Busch-Presence detector mini premium KNX [1]) [2]) 8 meters

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular.
Seated persons Ø: max. 5 m, max. 6.5 m and max. 9 m.
Walking persons Ø: max. 6.5 m, max. 8 m and max. 10.5 m.
Visible height 16 mm.
With 4 channels.
For dimming/brightness of the rules to a defined value in a designated collection area.
HVAC function for controlling heating and/or cooling systems and ventilation systems in the designated collection area.
Detectors application with 2 power off stages.
Detectors application with integrated monitoring function.
Constant light controller with up to two independent channels.
Constant light controller with max. 2 outputs for dimming daylight control/rules of two rooflights in the room.
Integrated object room temperature controller.
10 freely programmable IR channels (blue and/or white)
Incl. 5 logic channels (logic gates, gates, delay and staircase lighting)
Evaluation via internal brightness sensor.
Weighting of up to 2 external brightness values and the internal brightness sensor possible.
The programming button can be activated with the IR transmitter 6010-25 (-500).
With integrated KNX bus coupler.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Suitable for surface mounting installation.
Cannot be installed in British Standard or VDE flushmounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1290-40) with corresponding cover plates (1290-47 or 1290-85 for fair faced concrete) or IBTronic H120-68 from Spelsberg.
Connections:
KNX-line: Bus connection terminal
Brightness limit value: 1 Lux - 1000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 45 mm
Mounting depth: 29 mm

Colour	Type	Order code	Pack/Qty.
aluminium silver	**6131/21-183-500**	2CKA006132A0345	1
studio white matt	**6131/21-24-500**	2CKA006132A0344	1

[1]) For software and description please check the current Online-Catalogue.
[2]) HVAC = Heating/ ventilation/air-conditioning

Movement detector

KNK Presence detector

Busch-Presence detector KNX [1] 12 meters

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular.
Seated persons Ø: max. 8 m, max. 10 m and max. 14 m.
Walking persons Ø: max. 10 m, max. 12 m and max. 16 m.
Visible height 23 mm.
With 2 channels.
Targeted for connection and disconnection of lights bands depending on the room brightness.
Regulation in response to the movement possible.
Using the device as presence and/or movement detectors.
Detectors application with 2 power off stages.
Detectors application with integrated monitoring function.
Constant light switch with up to two independent channels.
Constant light switch with max. 2 outputs for brightness-dependent switching of two light bands in the area.
With integrated KNX bus coupler.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Suitable for surface mounting installation.
Cannot be installed in British Standard or VDE flushmounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1290-40) with corresponding cover plates (1290-47 or 1290-85 for fair faced concrete) or IBTronic H120-68 from Spelsberg.
Connections:
KNX-line: Bus connection terminal
Brightness limit value: 1 Lux - 1000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 91 mm x 91 mm x 45 mm
Mounting depth: 22 mm

Colour	Type	Order code	Pack/Qty.
aluminium silver	**6131/30-183-500**	2CKA006132A0347	1
studio white matt	**6131/30-24-500**	2CKA006132A0346	1

[1] For software and description please check the current Online-Catalogue.

Busch-Presence detector premium KNX [1] [2] 12 meters

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular.
Seated persons Ø: max. 8 m, max. 10 m and max. 14 m.
Walking persons Ø: max. 10 m, max. 12 m and max. 16 m.
Visible height 23 mm.
With 4 channels.
For dimming/brightness of the rules to a defined value in a designated collection area.
HVAC function for controlling heating and/or cooling systems and ventilation systems in the designated collection area.
Detectors application with 2 power off stages.
Detectors application with integrated monitoring function.
Constant light controller with up to two independent channels.
Constant light controller with max. 2 outputs for dimming daylight control/rules of two rooflights in the room.
Integrated object room temperature controller.
10 freely programmable IR channels (blue and/or white)
Incl. 5 logic channels (logic gates, gates, delay and staircase lighting)
Evaluation via internal brightness sensor.
Weighting of up to 2 external brightness values and the internal brightness sensor possible.
The programming button can be activated with the IR transmitter 6010-25 (-500).
With integrated KNX bus coupler.
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Suitable for surface mounting installation.
Cannot be installed in British Standard or VDE flushmounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1290-40) with corresponding cover plates (1290-47 or 1290-85 for fair faced concrete) or IBTronic H120-68 from Spelsberg.
Connections:
KNX-line: Bus connection terminal
Brightness limit value: 1 Lux - 1000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 91 mm x 91 mm x 45 mm
Mounting depth: 22 mm

Colour	Type	Order code	Pack/Qty.
aluminium silver	**6131/31-183-500**	2CKA006132A0349	1
studio white matt	**6131/31-24-500**	2CKA006132A0348	1

[1] For software and description please check the current Online-Catalogue.
[2] HVAC = Heating/ ventilation/air-conditioning

Movement detector

KNK Presence detector

Busch-Presence detector Corridor KNX [1]) 30 meters

Detection range: rectangular.
For mounting height of 3 m: frontal toward the detector at a max. of 20 m x 3 m (at a max. of 10 m x 3 m per side). Crosswise toward the detector at a max. of 30 m x 3 m (max. of 15 m x 3m per side).
With integrated KNX bus coupler.
Mounting height 27 mm.
With 2 channels.
Targeted for connection and disconnection of lights bands depending on the room brightness.
Regulation in response to the movement possible.
Using the device as presence and/or movement detectors.
Detectors application with 2 power off stages.
Detectors application with integrated monitoring function.
Constant light switch with up to two independent channels.
Constant light switch with max. 2 outputs for brightness-dependent switching of two light bands in the area.
Ceiling mounting on suspended ceilings with spring clamps, on solid ceilings in surface-mounting boxes 6131/39-xxx(-500) or on VDE flush-mounted boxes with intermediate ring for VDE flush-mounted boxes 6131/38-xxx(-500).
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Cannot be installed in British Standard or VDE flushmounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1290-40) with corresponding cover plates (1290-47 or 1290-85 for fair faced concrete) or IBTronic H120-68 from Spelsberg.
Connections:
KNX-line: Bus connection terminal
Brightness limit value: 1 Lux - 1000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 91 mm x 91 mm x 49 mm
Mounting depth: 22 mm

Colour	Type	Order code	Pack/Qty.
studio white matt	**6131/50-24-500**	2CKA006132A0399	1
studio white matt	**6131/50-24-508**	2CKA006131A0054	1
aluminium silver	**6131/50-183-500**	2CKA006132A0400	1

[1]) For software and description please check the current Online-Catalogue.

Busch-Presence detector Corridor premium KNX [1]) [2]) 30 meters

Detection range: rectangular.
For mounting height of 3 m: frontal toward the detector at a max. of 20 m x 3 m (at a max. of 10 m x 3 m per side). Crosswise toward the detector at a max. of 30 m x 3 m (max. of 15 m x 3m per side).
With integrated KNX bus coupler.
Mounting height 27 mm.
With 4 channels.
For dimming/brightness of the rules to a defined value in a designated collection area.
HVAC function for controlling heating and/or cooling systems and ventilation systems in the designated collection area.
Detectors application with 2 power off stages.
Detectors application with integrated monitoring function.
Constant light controller with up to two independent channels.
Constant light controller with max. 2 outputs for dimming daylight control/rules of two rooflights in the room.
Integrated object room temperature controller.
10 freely programmable IR channels (blue and/or white)
Incl. 5 logic channels (logic gates, gates, delay and staircase lighting)
Evaluation via internal brightness sensor.
Weighting of up to 2 external brightness values and the internal brightness sensor possible.
The programming button can be activated with the IR transmitter 6010-25 (-500).
Ceiling mounting on suspended ceilings with spring clamps, on solid ceilings in surface-mounting boxes 6131/39-xxx(-500) or on VDE flush-mounted boxes with intermediate ring for VDE flush-mounted boxes 6131/38-xxx(-500).
Suitable for false ceilings with a board thickness from 9 to 25 mm.
Hole size: Ø 68 mm.
Cannot be installed in British Standard or VDE flushmounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1290-40) with corresponding cover plates (1290-47 or 1290-85 for fair faced concrete) or IBTronic H120-68 from Spelsberg.
Connections:
KNX-line: Bus connection terminal
Brightness limit value: 1 Lux - 1000 Lux
Mounting height: 2 m - 4 m
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 91 mm x 91 mm x 49 mm
Mounting depth: 22 mm

Colour	Type	Order code	Pack/Qty.
studio white matt	**6131/51-24-500**	2CKA006132A0413	1
studio white matt	**6131/51-24-508**	2CKA006131A0058	1
aluminium silver	**6131/51-183-500**	2CKA006132A0414	1

[1]) For software and description please check the current Online-Catalogue.
[2]) HVAC = Heating/ ventilation/air-conditioning

Movement detector

KNK Presence detector

Busch-Watchdog Sky KNX [1]) 24 meters

Detection range (for mounting height 6 m and 12 m): circular.
Walking persons Ø: max. 18 m and 24 m.
Visible height 23 mm. With 2 channels.
Targeted for connection and disconnection of lights bands depending on the room brightness.
Use of the device as a movement detector.
Detectors application with 2 power off stages.
Detectors application with integrated monitoring function. Constant light switch with up to two independent channels. Constant light switch with max. 2 outputs for brightness-dependent switching of two light bands in the area. With integrated KNX bus coupler.
The programming button can be activated with the IR transmitter 6010-25 (-500).
Suitable for false ceilings with a board thickness from 9 to 25 mm. Hole size: Ø 68 mm.
Suitable for surface mounting installation.
Cannot be installed in British Standard or VDE flushmounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1290-40) with corresponding cover plates (1290-47 or 1290-85 for fair faced concrete) or IBTronic H120-68 from Spelsberg.
Connections:
KNX-line: Bus connection terminal
Brightness limit value: 1 Lux - 1000 Lux
Mounting height: 4 m - 12 m
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 91 mm x 91 mm x 45 mm
Mounting depth: 22 mm

Colour	Type	Order code	Pack/Qty.
studio white matt	**6131/40-24-500**	2CKA006132A0350	1

[1]) For software and description please check the current Online-Catalogue.

Surface-mounting box
For Busch-Presence detector mini KNX

END OF LIFE

For installing a Busch-Presence detector mini KNX 6131/20-xxx(-500) or a Busch-Presence detector mini premium KNX 6131/21-xxx(-500).
Protection class (Device): IP 20
Dimensions: (L x W x D): 80 mm x 80 mm x 35 mm

Colour	Type	Order code	Pack/Qty.
aluminium silver	**6131/29-183-500**	2CKA006132A0352	1
studio white matt	**6131/29-24-500**	2CKA006132A0351	1

Surface-mounting box
For Busch-Presence detector KNX, Busch-Watchdog Sky KNX and Busch-Presence detector Corridor KNX

For mounting a Busch-Presence detector KNX 6131/30-xxx(-500), a Busch-Presence detector Premium KNX 6131/31-xxx(-500), a Busch-Presence detector Corridor KNX 6131/50-xxx(-500), a Busch-Presence detector Corridor premium KNX 6131/51-xxx(-500) or a Busch-Watchdog Sky KNX 6131/40-24(-500).
Protection class (Device): IP 20
Dimensions: (L x W x D): 91 mm x 91 mm x 33 mm

Colour	Type	Order code	Pack/Qty.
aluminium silver	**6131/39-183-500**	2CKA006132A0354	1
studio white matt	**6131/39-24-500**	2CKA006132A0353	1

Intermediate ring for VDE flush-mounted box
For Busch-Presence detector KNX, Busch-Watchdog Sky KNX and Busch-Presence detector Corridor KNX

For Busch-Presence detector KNX and Busch-Watchdog Sky KNX. For mounting a Busch-Presence detector KNX 6131/30-xxx(-500), a Busch-Presence detector KNX Premium KNX 6131/31-xxx(-500), a Busch-Presence detector Corridor KNX 6131/50-xxx(-500), a Busch-Presence detector Corridor premium KNX 6131/51-xxx(-500) or a Busch-Watchdog Sky KNX 6131/40-24(-500) on a VDE flush-mounted box. Protection class (Device): IP 20. Dimensions: (L x W x D): 91 mm x 91 mm x 22 mm

Colour	Type	Order code	Pack/Qty.
studio white matt	**6131/38-24-500**	2CKA006132A0403	1
aluminium silver	**6131/38-183-500**	2CKA006132A0404	1

Movement detector

ABB flexTronics, comfort switch

Busch-Comfort switch flex sensor [1) 2)]

Movement detector push-button switch combination.
For switching lighting systems that depend on brightness and movement.
With select lens, prevents detection of smaller animal.
Push switch function possible at all times.
With notice LED when manual operation is necessary.
Extension of the detection range by main unit/ extension unit combination.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off.
Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off.
Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off.
With continuous light/continuous Off function.
Adjusting elements on rear side. Surveillance density: 9 sectors with 28 switching segments.
Switch off delay: 1 to 10 min., adjustable.
Compatible with all ABB flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Display elements: LED for status display.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Brightness limit value: 5 Lux - daytime operation.
Hight above the wall: 21 mm.
The detection range specifications refer to an ambient temperature of 21°C.

Busch-art linear®

Colour	Type	Order code	Pack/Qty.
studio white	**64765-44G**	2CKA006800A3144	1
studio white, matt [1)]	**64765-44M**	2CKA006800A3145	1
black matt [1)]	**64765-45M**	2CKA006800A3147	1

solo®

Colour	Type	Order code	Pack/Qty.
ivory white	**64765-82-500**	2CKA006800A2885	1
studio white	**64765-84-500**	2CKA006800A2889	1

Busch-axcent®

Colour	Type	Order code	Pack/Qty.
anthracite	64765-81-500	2CKA006800A2883	1
aluminium silver [3)]	64765-83-500	2CKA006800A2887	1
studio white	64765-84-500	2CKA006800A2889	1
studio white, matt [3)]	64765-884-500	2CKA006800A2893	1
black matt [3)]	64765-885-500	2CKA006800A2895	1

carat®

Colour	Type	Order code	Pack/Qty.
anthracite	**64765-81-500**	2CKA006800A2883	1
ivory white	**64765-82-500**	2CKA006800A2885	1
studio white	**64765-84-500**	2CKA006800A2889	1
studio white, matt [3)]	**64765-884-500**	2CKA006800A2893	1
black matt [3)]	**64765-885-500**	2CKA006800A2895	1

pure stainless steel

Colour	Type	Order code	Pack/Qty.
stainless steel	**64765-866-500**	2CKA006800A2898	1

Busch-dynasty®

Colour	Type	Order code	Pack/Qty.
anthracite	**64765-81-500**	2CKA006800A2883	1
ivory white	**64765-82-500**	2CKA006800A2885	1

future® linear

Colour	Type	Order code	Pack/Qty.
anthracite	**64765-81-500**	2CKA006800A2883	1
ivory white	**64765-82-500**	2CKA006800A2885	1
aluminium silver [3)]	**64765-83-500**	2CKA006800A2887	
studio white	**64765-84-500**	2CKA006800A2889	1
studio white, matt [3)]	**64765-884-500**	2CKA006800A2893	1
black matt [3)]	**64765-885-500**	2CKA006800A2895	1

basic 55

Colour	Type	Order code	Pack/Qty.
white	**64765-92-507**	2CKA006800A2903	1
alpine white	**64765-94-507**	2CKA006800A2905	1
château-black	**64765-95-507**	2CKA006800A2906	1

[1)] Please order the respective flush-mounted insert separately.
[2)] The range specifications refer only to an ambient temperature of 21°C.
[3)] Surface painted.

Movement detector

ABB flexTronics, motion detector

	Busch-Comfort switch flex [1] [2] Complete set with comfort switch sensor and relay insert
	Ready-to-install movement detector push-button switch combination (set packaging). Consisting of Busch-Comfort switch flex sensor, 64765-84-500. Consisting of relay insert flex, 1gang, 64811 U-500. Consisting of future® linear cover frames, 1gang 1721-184K-500. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Display elements: LED for status display. Rated voltage: 230 V~. Rated frequency: 50 Hz. Power dissipation: 0,3 W. Outputs: 1x normally open contact, potential-bound. Suitable for: 230 V- LEDi, typical, rated power: 300 VA. Suitable for: 230 V incandescent lamps / 230 V halogen lamps, rated power: 2300 W. Suitable for: Low voltage halogen lamps that are operated via transformers, rated power: 2300 VA. Suitable for: Fluorescent lamps, Rated output: 2300 VA. Rated current: 10 AX, cos ϕ0.9. Detection range: frontal: 5 m, lateral: 3 m, at mounting height: 1.1 m. Detection angle: 170°. Brightness limit value: 5 Lux - daytime operation. Operation mounting height: 0.8 m - 1.2 m. Temperature range (Device): -5 °C to 45 °C. Dimensions: (L x W x D): 85 mm x 85 mm x 46 mm. Mounting depth: 25 mm.

Colour	**Type**	**Order code**	**Pack/Qty.**
studio white	**64765 UJ-84-500**	2CKA006800A2914	1

[1] The range specifications refer only to an ambient temperature of 21°C.

[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Movement detector

ABB flexTronics, motion detector

Busch-Watchdog 180 flex, basic sensor [1] [2]
with select-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Compatible with all ABB-flexTronics® inserts.Adjusting elements on rear side. Extension of the detection range by main unit/ extension unit combination. Additional activation/ deactivation option via push-button input on the flush-mounted insert. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Hight above the wall: 22 mm. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Detection range at mounting height 1.1 m: frontal: 12 m, lateral: 12 m. Detection angle: 180°. Brightness limit value: 5 Lux - 500 Lux, up to daytime operation. Mounting height: 0.8 m - 1.2 m.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm
The detection range specifications refer to an ambient temperature of 21°C.

Busch-art linear®

Colour	Type	Order code	Pack/Qty.
studio white	**64761-44G-500**	2CKA006800A3124	1
studio white, matt [3]	**64761-44M-500**	2CKA006800A3125	1
black matt [3]	**64761-45M-500**	2CKA006800A3127	1

future® linear

Colour	Type	Order code	Pack/Qty.
anthracite	**64761-81-500**	2CKA006800A2921	1
ivory white	**64761-82-500**	2CKA006800A2923	1
aluminium silver [3]	**64761-83-500**	2CKA006800A2925	1
studio white	**64761-84-500**	2CKA006800A2927	1
studio white, matt [3]	**64761-884-500**	2CKA006800A2931	1
black matt [3]	**64761-885-500**	2CKA006800A2933	1

solo®

Colour	Type	Order code	Pack/Qty.
ivory white	**64761-82-500**	2CKA006800A2923	1
studio white	**64761-84-500**	2CKA006800A2927	1

Busch-axcent®

Colour	Type	Order code	Pack/Qty.
anthracite	**64761-81-500**	2CKA006800A2921	1
aluminium silver [3]	**64761-83-500**	2CKA006800A2925	1
studio white	**64761-84-500**	2CKA006800A2927	1
studio white, matt [3]	**64761-884-500**	2CKA006800A2931	1
black matt [3]	**64761-885-500**	2CKA006800A2933	1

carat®

Colour	Type	Order code	Pack/Qty.
anthracite	**64761-81-500**	2CKA006800A2921	1
ivory white	**64761-82-500**	2CKA006800A2923	1
studio white	**64761-84-500**	2CKA006800A2927	1
studio white, matt [3]	**64761-884-500**	2CKA006800A2931	1
black matt [3]	**64761-885-500**	2CKA006800A2933	1

pure stainless steel

Colour	Type	Order code	Pack/Qty.
stainless steel	**64761-866-500**	2CKA006800A2936	1

Busch-dynasty®

Colour	Type	Order code	Pack/Qty.
anthracite	**64761-81-500**	2CKA006800A2921	1
ivory white	**64761-82-500**	2CKA006800A2923	1

basic 55

Colour	Type	Order code	Pack/Qty.
white	**64761-92-507**	2CKA006800A2941	1
alpine white	**64761-94-507**	2CKA006800A2943	1
château-black	**64761-95-507**	2CKA006800A2944	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex [1] [2]
Complete set with Basic sensor select-lens and relay insert

Ready-to-install movement detector for flush-mounted installation (set packaged).
Consisting of Busch-Watchdog 180 flex, basic sensor 64761-84-500.
Consisting of relay insert flex, 1gang, 64811 U-500.
Consisting of future® linear cover frames, 1gang 1721-184K-500.
Rated voltage: 230 V~
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical., rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via
transformers, rated power: 2300 VA.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m.
Detection angle: 180°.
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation.
Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 48 mm
Mounting depth: 25 mm.
The detection range specifications refer to an ambient temperature of 21°C.

Colour	Type	Order code	Pack/Qty.
studio white	**64761 UJ-84-500**	2CKA006800A2951	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Movement detector

ABB flexTronics, motion detector

Busch-Watchdog 180 flex, comfort sensor [1] [2] with select-lens

Movement detector sensor with with measurement of ambient light. For automatic switching of devices dependent on motion and brightness.
Push switch function possible at all times.
In combination with dimmer insert flex: dimming function of lighting and selectable light value storage.
With enabling of pre-warning of switch-off for stairwell operation.
Compatible with all ABB-flexTronics® inserts.
Adjusting elements on rear side.
Extension of the detection range by main unit/ extension unit combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
With continuous light/continuous Off function.
With detection display in test mode.
Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Hight above the wall: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range at mounting height 1.1 m: frontal: 12 m, lateral: 12 m.
Detection angle: 180°. Brightness limit value: 5 Lux - 500 Lux, up to daytime operation.
Mounting height: 0.8 m - 1.2 m.
Temperature range (Device): -5 °C to 45°C.
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm.
The detection range specifications refer to an ambient temperature of 21°C.

Busch-art linear®

Colour	Type	Order code	Pack/Qty.
studio white	**64762-44G-500**	2CKA006800A3132	1
studio white matt [3]	**64762-44M-500**	2CKA006800A3133	1
black matt [3]	**64762-45M-500**	2CKA006800A3135	1

future® linear

Colour	Type	Order code	Pack/Qty.
anthracite	**64762-81-500**	2CKA006800A2958	1
ivory white	**64762-82-500**	2CKA006800A2960	1
aluminium silver [3]	**64762-83-500**	2CKA006800A2962	1
studio white	**64762-84-500**	2CKA006800A2964	1
studio white matt [3]	**64762-884-500**	2CKA006800A2968	1
black matt [3]	**64762-885-500**	2CKA006800A2970	1

solo®

Colour	Type	Order code	Pack/Qty.
ivory white	**64762-82-500**	2CKA006800A2960	1
studio white	**64762-84-500**	2CKA006800A2964	1

Busch-axcent®

Colour	Type	Order code	Pack/Qty.
anthracite	**64762-81-500**	2CKA006800A2958	1
aluminium silver [3]	**64765-83-500**	2CKA006800A2887	1
studio white	**64762-84-500**	2CKA006800A2964	1
grey metallic [3]	**64762-803-500**	2CKA006800A2966	1
studio white matt [3]	**64762-884-500**	2CKA006800A2968	1

carat®

Colour	Type	Order code	Pack/Qty.
anthracite	**64762-81-500**	2CKA006800A2958	1
ivory white	**64762-82-500**	2CKA006800A2960	1
studio white	**64762-84-500**	2CKA006800A2964	1
studio white matt [3]	**64762-884-500**	2CKA006800A2968	1
black matt [3]	**64762-885-500**	2CKA006800A2970	1

pure stainless steel

Colour	Type	Order code	Pack/Qty.
stainless steel	**64762-866-500**	2CKA006800A2973	1

Busch-dynasty®

Colour	Type	Order code	Pack/Qty.
anthracite	**64762-81-500**	2CKA006800A2958	1
ivory white	**64762-82-500**	2CKA006800A2960	1

basic 55

Colour	Type	Order code	Pack/Qty.
white	**64762-92-507**	2CKA006800A2978	1
alpine white	**64762-94-507**	2CKA006800A2980	1
château-black	**64762-95-507**	2CKA006800A2981	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex [1] [2] Complete set with Comfort sensor select lens and relay insert

Ready-to-install movement detector for flush-mounted installation (set packaged). Consisting of Busch-Watchdog 180 flex comfort sensor with select lens. Consisting of relay insert flex, 1gang, 64811 U. Consisting of future® linear cover frames, 1gang 1721-184K. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 1. Outputs: 1x Normally open contact, potential-bound. Suitable for: 230 V- LEDi, typical. Rated power: 300 VA. Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 2300 W. Suitable for: Low voltage halogen lamps that are operated via transformers. Rated power: 2300 VA
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m. Detection angle: 180°. Brightness limit value: 5 Lux - 500 Lux Up to daytime operation. Mounting height: 0.8 m - 1.2 m. Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 48 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
studio white	**64762 UJ-84-500**	2CKA006800A2988	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Movement detector

ABB flexTronics, motion detector

Busch-Watchdog 180 flex, comfort sensor wireless [1] [2] with select-lens

For automatic switching of devices dependent on motion and brightness.
Push switch function possible at all times.
In combination with dimmer insert flex: dimming function of lighting and selectable light value storage.
With time-controlled basic illumination function.
With time-controlled night anti-glare function.
With enabling of pre-warning of switch-off for stairwell operation.
Compatible with all ABB-flexTronics® inserts.
Works with free@home wireless.
Remote operation via the Bluetooth and smartphone/ tablet app.
Programming via Bluetooth with the ABB-free@home® Next app or via the web interface of the System Access Point.
Extension of the detection range by main unit/ extension unit combination.
Additional activation option via pushbutton input on the flush-mounted insert.
Timer with Astro function.
Automatic switchover from summer time to winter time (switch-off function).
With continuous light/continuous Off function.
With brightness-independent test mode for evaluating the detection zone.
With detection LED at test mode.
Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For relay insert flex, 2gang, 64821 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Hight above the wall: 22 mm.
Temperature range (device): -5 °C - 45 °C.
Detection range: frontal at mounting height1.1 m: 12 m, lateral: 12 m.
Brightness limit value: 5 Lux - up to daytime operation.
Detection angle: 180°.
Dimensions: (L x W x D): 55 mm x 55 mm x 35 m.
Mounting height: 0.8 m - 1.2 m.
The detection range specifications refer to an ambient temperature of 21°C.

Busch-art linear®

Colour	Type	Order code	Pack/Qty.
studio white	**62762-44G-WL-500**	2CKA006200A0302	1
studio white matt [3]	**62762-44M-WL-500**	2CKA006200A0303	1
black matt [3]	**62762-45M-WL-500**	2CKA006200A0305	1

solo®

Colour	Type	Order code	Pack/Qty.
ivory white	**62762-82-WL-500**	2CKA006200A0168	1
studio white	**62762-84-WL-500**	2CKA006200A0172	1

Busch-axcent®

Colour	Type	Order code	Pack/Qty.
anthracite	**62762-81-WL-500**	2CKA006200A0166	1
aluminium silver [3]	**62762-83-WL-500**	2CKA006200A0170	1
studio white	**62762-84-WL-500**	2CKA006200A0172	1
studio white matt [3]	**62762-884-WL-500**	2CKA006200A0176	1
black matt [3]	**62762-885-WL-500**	2CKA006200A0178	1

carat®

Colour	Type	Order code	Pack/Qty.
anthracite	**62762-81-WL-500**	2CKA006200A0166	1
ivory white	**62762-82-WL-500**	2CKA006200A0168	1
studio white	**62762-84-WL-500**	2CKA006200A0172	1
studio white matt [3]	**62762-884-WL-500**	2CKA006200A0176	1
black matt [3]	**62762-885-WL-500**	2CKA006200A0178	1

pure stainless steel

Colour	Type	Order code	Pack/Qty.
stainless steel	**62762-866-WL-500**	2CKA006200A0181	1

Busch-dynasty®

Colour	Type	Order code	Pack/Qty.
anthracite	**62762-81-WL-500**	2CKA006200A0166	1
ivory white	**62762-82-WL-500**	2CKA006200A0168	1

basic 55

Colour	Type	Order code	Pack/Qty.
white	**62762-92-WL-507**	2CKA006200A0186	1
alpine white	**62762-94-WL-507**	2CKA006200A0188	1
château-black	**62762-95-WL-507**	2CKA006200A0189	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex wireless [1] [2] Complete set with Comfort sensor select lens and relay insert

Consisting of Busch-Watchdog 180 flex comfort sensor with select lens, 62762-84-WL-500. Consisting of relay insert flex, 1gang, 64811 U-500. Consisting of future® linear cover frame, 1gang 1721-184K-500. Rated voltage: 230 V~
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical., rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W. Suitable for: Low voltage halogen lamps that are operated via transformers, rated power: 2300 VA. Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m. Detection angle: 180°.
Brightness limit value: 5 Lux - 500 Lux, up to daytime operation. Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 48 mm
Mounting depth: 25 mm.

Colour	Type	Order code	Pack/Qty.
studio white	**62762 UJ-84-WL-500**	2CKA006200A0196	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Movement detector

ABB flexTronics, motion detector

Busch-Watchdog 180 flex, comfort sensor [1] [2] with multi-lens

Movement detector sensor with measurement of ambient light.
For automatic switching of devices dependent on motion and brightness.
With 4 detection levels.
In combination with dimmer insert flex: dimming function of lighting and selectable light value storage.
Compatible with all ABBflexTronics® inserts.
Adjusting elements on rear side.
Multi-lens: suitable also for mounting heights of 2.20 m.
Extension of the detection range by main unit/extension unit combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
With continuous light/continuous Off function.
With detection display in test mode.
Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Hight above the wall: 31 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range at mounting height 1.1 m: frontal: 8 m, lateral: 7 m.
Detection rang at mounting height: 2.2 m: frontal: 8 m, lateral: 8 m.
Detection angle: 180 °.
Brightness limit value: 5 Lux - 500 Lux. up to daytime operation.
Mounting height: 0.8 m - 1.2 m, alternative: 2.2 m.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 63 mm x 63 mm x 45 mm.
The detection range specifications refer to an ambient temperature of 21°C.

Busch-art linear®

Colour	Type	Order code	Pack/Qty.
studio white	**64764-44G**	2CKA006800A3140	1
studio white matt [3]	**64764-44M-500**	2CKA006800A3141	1
black matt [3]	**64764-45M-500**	2CKA006800A3143	1

future® linear

Colour	Type	Order code	Pack/Qty.
anthracite	**64764-81-500**	2CKA006800A2995	1
ivory white	**64764-82-500**	2CKA006800A2997	1
aluminium silver [3]	**64764-83-500**	2CKA006800A2999	1
studio white	**64764-84-500**	2CKA006800A3001	1
studio white matt [3]	**64764-884-500**	2CKA006800A3005	1
black matt [3]	**64764-885-500**	2CKA006800A3007	1

solo®

Colour	Type	Order code	Pack/Qty.
ivory white	**64764-82-500**	2CKA006800A2997	1
studio white	**64764-84-500**	2CKA006800A3001	1

Busch-axcent®

Colour	Type	Order code	Pack/Qty.
anthracite	**64764-81-500**	2CKA006800A2995	1
aluminium silver [3]	**64764-83-500**	2CKA006800A2999	1
studio white	**64764-84-500**	2CKA006800A3001	1
studio white matt [3]	**64764-884-500**	2CKA006800A3005	1
black matt [3]	**64764-885-500**	2CKA006800A3007	1

carat®

Colour	Type	Order code	Pack/Qty.
anthracite	**64764-81-500**	2CKA006800A2995	1
ivory white	**64764-82-500**	2CKA006800A2997	1
studio white	**64764-84-500**	2CKA006800A3001	1
studio white matt [3]	**64764-884-500**	2CKA006800A3005	1
black matt [3]	**64764-885-500**	2CKA006800A3007	1

pure stainless steel

Colour	Type	Order code	Pack/Qty.
stainless steel	**64764-866-500**	2CKA006800A3010	1

Busch-dynasty®

Colour	Type	Order code	Pack/Qty.
anthracite	**64764-81-500**	2CKA006800A2995	1
ivory white	**64764-82-500**	2CKA006800A2997	1

basic 55

Colour	Type	Order code	Pack/Qty.
white	**64764-92-507**	2CKA006800A3015	1
alpine white	**64764-94-507**	2CKA006800A3017	1
château-black	**64764-95-507**	2CKA006800A3018	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Movement detector

ABB flexTronics, motion detector

Busch-Watchdog 180 flex [1] [2] Complete set with Comfort sensor multi-lens and relay insert

Ready-to-install movement detector for flush-mounted installation (set packaged). Consisting of Busch-Watchdog 180 flex, comfort sensor with multi lens 64764-84-500. Consisting of relay insert flex, 1gang, 64811 U-500. Consisting of future® linear cover frames, 1gang 1721-184K-500. Rated voltage: 230 V~. Rated frequency: 50 Hz. Inputs: 1 Outputs: 1x Normally open contact, potential-bound Suitable for: 230 V- LEDi, typical., rated power: 300 VA. Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W. Suitable for: Low voltage halogen lamps that are operated via transformers, rated power: 2300 VA. Detection range: frontal: 8 m, lateral: 7 m, mounting height: 1.1 m. Detection range: frontal: 8 m, lateral: 8 m, mounting height: 2.2 m.Detection angle: 180°. Brightness limit value: 5 Lux - 500 Lux, up to daytime operation. Mounting height: 0.8 m - 1.2 m, alternative: 2.2 m. Temperature range (Device): -5 °C to 45 °C Dimensions: (L x W x D): 80 mm x 80 mm x 57 mm Mounting depth: 25 mm. The detection range specifications refer to an ambient temperature of 21°C.

Colour	Type	Order code	Pack/Qty.
studio white	**64764 UJ-84-500**	2CKA006800A3025	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Busch-Watchdog 180 flex, comfort sensor wireless 1) 2) with multi-lens

For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night antiglare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all ABB-flexTronics® inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by main unit/extension unit combination. Additional activation option via push-button input on the flush-mounted insert. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness independent test mode for evaluating the detection zone. With detection LED at test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U-500. For e-contact insert flex, 1gang, 64814 U-500. For relay insert flex, 2gang, 64821 U-500. For LED touch dimmer insert flex, 1gang, 64851 U-500. For extension insert flex, 64891 U-500. Hight above the wall: 31 mm. Temperature range (device): -5 °C - 45 °C. Detection range at mounting height 1.1 m: frontal: 8 m, lateral: 7 m. Detection range at mounting height: 2.2 m: frontal: 8 m, lateral: 8 m. Brightness limit value: 5 Lux - up to daytime operation. Detection angle: 180 °. Dimensions: (L x W x D): 55 mm x 55 mm x 45 mm. Mounting height: 0.8 m - 1.2 m, alternatively: 2.2 m. The detection range specifications refer to an ambient temperature of 21°C.

Busch-art linear®

Colour	Type	Order code	Pack/Qty.
studio white	**62764-44G-WL-500**	2CKA006200A0311	1
studio white matt [3]	**62764-44M-WL-500**	2CKA006200A0312	1
black matt [3]	**62764-45M-WL-500**	2CKA006200A0314	1

future® linear

Colour	Type	Order code	Pack/Qty.
anthracite	**62764-81-WL-500**	2CKA006200A0234	1
ivory white	**62764-82-WL-500**	2CKA006200A0236	1
aluminium silver [3]	**62764-83-WL-500**	2CKA006200A0238	1
studio white	**62764-84-WL-500**	2CKA006200A0240	1
studio white matt [3]	**62764-884-WL-500**	2CKA006200A0244	1
black matt [3]	**62764-885-WL-500**	2CKA006200A0246	1

solo®

Colour	Type	Order code	Pack/Qty.
ivory white	**62764-82-WL-500**	2CKA006200A0236	1
studio white	**62764-84-WL-500**	2CKA006200A0240	1

Busch-axcent®

Colour	Type	Order code	Pack/Qty.
anthracite	**62764-81-WL-500**	2CKA006200A0234	1
aluminium silver [3]	**62764-83-WL-500**	2CKA006200A0238	1
studio white	**62764-84-WL-500**	2CKA006200A0240	1
studio white matt [3]	**62764-884-WL-500**	2CKA006200A0244	1
black matt [3]	**62764-885-WL-500**	2CKA006200A0246	1

carat®

Colour	Type	Order code	Pack/Qty.
anthracite	**62764-81-WL-500**	2CKA006200A0234	1
ivory white	**62764-82-WL-500**	2CKA006200A0236	1
studio white	**62764-84-WL-500**	2CKA006200A0240	1
studio white matt [3]	**62764-884-WL-500**	2CKA006200A0244	1
black matt [3]	**62764-885-WL-500**	2CKA006200A0246	1

pure stainless steel

Colour	Type	Order code	Pack/Qty.
stainless steel [3]	**62764-866-WL-500**	2CKA006200A0249	1

Busch-dynasty®

Colour	Type	Order code	Pack/Qty.
anthracite	**62764-81-WL-500**	2CKA006200A0234	1
ivory white	**62764-82-WL-500**	2CKA006200A0236	1

basic 55

Colour	Type	Order code	Pack/Qty.
white	**62764-92-WL-507**	2CKA006200A0254	1
alpine white	**62764-94-WL-507**	2CKA006200A0256	1
château-black	**62764-95-WL-507**	2CKA006200A0257	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Movement detector

ABB flexTronics, motion detector

	Busch-Watchdog 180 flex wireless [1] [2] Complete set with Comfort sensor multi-lens and relay insert
	Consisting of Busch-Watchdog 180 flex comfort sensor with multi lens, 62764-84-WL-500. Consisting of relay insert flex, 1gang, 64811 U-500. Consisting of future® linear cover frame, 1gang 1721-184K-500. Rated voltage: 230 V~ Rated frequency: 50 Hz. Inputs: 1 Outputs: 1x Normally open contact, potential-bound Suitable for: 230 V- LEDi, typical., rated power: 300 VA. Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W. Suitable for: Low voltage halogen lamps that are operated via transformers, rated power: 2300 VA. Detection range: frontal: 8 m, lateral: 7 m, mounting height: 1.1 m. Detection range: frontal: 8 m, lateral: 8 m, mounting height: 2.2 m. Detection angle: 180°. Brightness limit value: 5 Lux - 500 Lux, up to daytime operation. Mounting height: 0.8 m - 1.2 m, alternative: 2.2 m. Temperature range (Device): -5 °C to 45 °C Dimensions: (L x W x D): 80 mm x 80 mm x 57 mm Mounting depth: 25 mm.

Colour	Type	Order code	Pack/Qty.
studio white	**62764 UJ-84-WL-500**	2CKA006200A0264	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Accesories

	RC suppressor
	For protection against the damage or destruction of electronic devices due to overvoltages. For wiring network-interconnected inductivities (e.g.. relay, protection, fluorescent lamps, transformers, etc.). Eliminates functional disturbances on electronic devices, e.g. automatic circuit reclosure (clocking) of a movement detector. Dimensions: diameter 25 mm, length 35 mm, length of the connecting cable approx. 100 mm. Rated voltage: 230 V~, +10 % / -10 % Rated frequency: 50 Hz

Colour	Type	Order code	Pack/Qty.
	6899	2CKA006899A0231	10

ABB flexTronics inserts

	Relay insert flex, 1gang [1]
	3 wire connection (neutral conductor required). For switching lighting systems. Operation in 1gang 2way installations via push switch unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Comfort switch flex control element 64765-...-500. For Busch-Watchdog 180 flex sensors 6476x-...-500. For Busch-Watchdog 180 flex sensors, wireless, 276x-...-WL-500. Combinable with extension insert, 64891 U. Rated voltage: 230 V~ Rated frequency: 50 Hz Inputs: 1. Outputs: 1x Normally open contact, potential bound. Suitable for: 230 V- LEDi, typical, rated power: 300 VA. Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W. Suitable for: Low voltage halogen lamps that are operated via transformers,rated power: 2300 VA. Temperature range (Device): -25 °C to 55 °C Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm Mounting depth: 25 mm 

Colour	Type	Order code	Pack/Qty.
	64811 U-500	2CKA006800A3042	1/10

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Movement detector

ABB flexTronics inserts

Relay insert flex, 2gang [1]

3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



Colour	Type	Order code	Pack/Qty.
	64821 U-500	2CKA006800A3045	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

e-contact insert flex, 1gang [1] [2]

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64814 U-500	2CKA006800A3048	1

[1] Use only dimmable high-voltage LEDs.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Movement detector

ABB flexTronics inserts

LED dimmer insert flex, 1gang [1] [2] [3] [4] [5] [6]
FM, LED, 3-240 VA

2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi)
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x dimming channel
Suitable for: 230 V LEDi, typical (leading edge control)
Rated power: 3 - 100 VA
Suitable for: 230 V LEDi, typical (trailing edge control)
Rated power: 3 - 240 W
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



Colour	Type	Order code	Pack/Qty.
	64851 U-500	2CKA006500A0013	1

[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Busch-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

Extension insert flex [1]

3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations.
For group control of flex inserts via extension unit communication.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with all flex inserts.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Control/Signal outputs: 1, electronic output, potential-bound
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

Colour	Type	Order code	Pack/Qty.
	64891 U-500	2CKA006800A3051	1

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

Movement detector

Proximity switch

Proximity switch

3 wire connection (neutral conductor required).
Relay insert with proximity sensor.
For contactless ON/OFF switching of electric loads, e.g. lights.
For switching incandescent lamps, 230 V tungsten halogen lamps, fluorescent lamps and low-voltage halogen lamps, that are actuated via transformers.
Switches when detecting an approach at < approx. 5 cm.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V incandescent lamps, 230 V halogen lamps, fluorescent lamps and low-voltage halogen lamps, that are operated via transformers.
Rated current: 10 AX
Rated power: 2300 W/VA
Temperature range (Device): -25 °C to 55 °CBritish Standard EN 60669-2-1

Colour	Type	Order code	Pack/Qty.
	6406 U	2CKA006400A0034	1

Cover plate
Proximity switch

For proximity switch 6406 U.

future® linear

Colour	Type	Order code	Pack/Qty.
anthracite	**6476-81**	2CKA006470A0007	1/10
ivory white	**6476-82**	2CKA006470A0003	10
aluminium silver [1]	**6476-83**	2CKA006470A0008	10
studio white	**6476-84**	2CKA006470A0004	10
studio white, matt [1]	**6476-884**	2CKA006470A0010	10
black matt [1]	**6476-885**	2CKA006470A0011	10

solo®

Colour	Type	Order code	Pack/Qty.
ivory white	**6476-82**	2CKA006470A0003	10
studio white	**6476-84**	2CKA006470A0004	10
grey metallic [1]	**6476-803**	2CKA006470A0006	10

Busch-axcent®

Colour	Type	Order code	Pack/Qty.
anthracite	**6476-81**	2CKA006470A0007	1/10
studio white	**6476-84**	2CKA006470A0004	10
black matt [1]	**6476-885**	2CKA006470A0011	10

carat®

Colour	Type	Order code	Pack/Qty.
anthracite	**6476-81**	2CKA006470A0007	1/10
ivory white	**6476-82**	2CKA006470A0003	10
studio white	**6476-84**	2CKA006470A0004	10

pure stainless steel

Colour	Type	Order code	Pack/Qty.
stainless steel	**6476-866**	2CKA006470A0009	10

[1] Surface painted.

Twilight switch [1] [2]

With labelling field. Labelling field 57.8 x 9.8 mm
Switch-on/switch-off delay: approx. 3-6 min non-adjustable. Rated voltage: 230 V~
Rated frequency: 50 Hz. Rated current: 16 AX
Rated power: 3680 W/VA
Brightness limit value: 3 Lux - 500 Lux nominal
Protection class (Device): IP 44
Temperature range (Device): -35 °C to 55 °C
Dimensions: (L x W x D): 83 mm x 74 mm x 55 mm

Colour	Type	Order code	Pack/Qty.
grey	**2240 W-53**	2CKA006500A0791	1/10
alpine white	**2240 W-54**	2CKA006500A0792	1/10

[1] For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
[2] Labelling strip non-illuminable.

INSTALLATION MATERIALS

Electrical installation solutions for buildings
Installation materials

Index

Introduction	2
Conduits and accessories	4
Flush mounted boxes	5
Surface mounted boxes	8
ABB Plug & Play	10

Installation materials

ABB installation materials are continuously developed in cooperation with installers, paying close attention to easy and quick installation, high quality and reliability. They are designed to be compatible with each other and suitable for different installation situations and building methods.

ABB installation materials are:

- **Future oriented.**
  Offering customized solutions, following trends and future requirements for building constructions like prefabrication and modularity, supported by BIM models.

- **Environmentally friendly.**
  Choosing the materials with minimal environmental impact, minimizing waste and managing product environmental data in a transparent way.

- **Well documented.**
  The right information always easily available for each customer. Products are fully documented including ETIM data supporting digital sales.

Advantages of ABB installation materials:

- **Wide choice** of installation materials, meeting different worldwide requirements and installation habits.
- **Efficient, easy and fast installation.** Products are easy and fast to install and they enable efficient installation of wiring accessories and KNX products. Effective project execution brings overall cost-efficiency.
- **Reliable connections** in hollow, concrete and stone structures. Faulty installations are expensive and difficult to fix. Therefore we put effort in ensuring that the connections are reliable.
- **Quality material with specific properties used.** Material properties are selected to withstand demanding environments like fire, high temperature variations, frost, rain, etc.
- **Environmentally friendly.** Products are halogen free.
- **Safety.** Installation materials are designed to meet the highest requirements in regard to health and safe operation.
- **Special applications available.** Special applications to fire retardant walls and exterior walls (airtight solutions) are available.
- **Innovation based on cooperation with a customers and their needs**



Installation materials
A comprehensive offering

Conduits and accessories

Piping materials and accessories are developed to work as a system with ABB installation boxes and are easy to adapt to different installations. The piping materials ensure a safe and cost-efficient installation. Product range offers great variety of products as conduit extensions and adaptors, conduit bends, conduit end pieces and sleeves and accessories for concrete casting applications. Product colour coding helps customers to choose easier the right accessory size.

Conduit extensions and adaptors

Conduit bends

Concrete casting accessories

Conduit end pieces and sleeves

Other conduit accessories

Installation materials
A comprehensive offering

Flush mounted boxes

A wide variety of flush mounted junction and installation boxes, accompanied with accessories, helps installers work in an efficient and flexible way. The customer will find a suitable solution for any type of building or wall: brick or solid walls, various hollow or dry walls. Special solutions like for fire retardant walls or air tight and sound proof walls are also available (complying with relevant standards). The products are made of high quality halogen free plastic materials.

Hollow wall boxes

HW52-F

HW252-F

3050-H

System Ideal

System ABB

Nordic smart boxes

AUS74 front mounted boxes range

Installation materials
A comprehensive offering

Hollow wall boxes for special applications

HW52-F BW
Fire retardant

HW252-F
Fire retardant

BWCV165B
Fire retardant ceiling box

HW52F-IGD
Soundproof and airtight insert for HW52-F

HW252-F IGD
Soundproof and airtight insert for HW252-F

HW252-F IGD BW
Soundproof, airtight and fire retardant insert for HW52-F

Solid (brick) wall boxes

MD4050

DD-12
RFID detector

3040-U

Concrete boxes

Concrete boxes used in precast concrete constructions as well as on site casting with moulds

C80r-16/19

C60

PMK80

MGD50

G153

G251

AU5.2

AU8.73

DCL Lighting outlets EN61995

Installation materials
A comprehensive offering

Surface mounted boxes

Discover growing portfolio of ABB surface mounted junction boxes for different types of applications. Boxes come in different shapes, sizes and IP ratings to match to each application requirement. Different colours of AP9 boxes can be used to improve the overview of different installations (e.g. green boxes for KNX, red boxes for fire or alarm systems etc.). The surface mounted box solutions are fast and reliable in all conditions.

Indoors

AP6

AP12

4206-D

4201-D

3611

3611W2

3611GB4

3640-D

3640W4

Indoors

3640W2-G

3640GB33

Outdoors or wet spaces

AP7

AP75

3665

AP9

AP10

Special applications

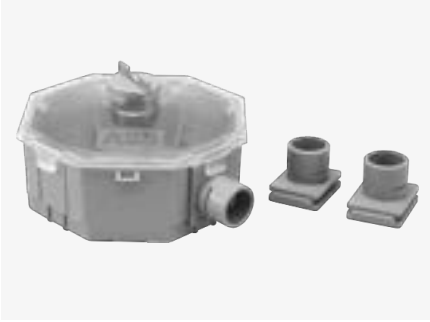

KM8/16
Cable joint for underground use

Installation materials
ABB Plug & Play

ABB Plug & Play is a concept that conveys convenience, efficiency, speed and time savings. Standard ABB products are re-configured to a customer's specification, ready for installation; Plug & Play.

A smart combination of boxes, wiring accessories and covers with plug & play connectors guarantees efficient, quick and highly reliable installation.

Through all the preparations in the design phase and the assembly of parts by ABB, the installation will be effortless and at lightning speed.

Examples:

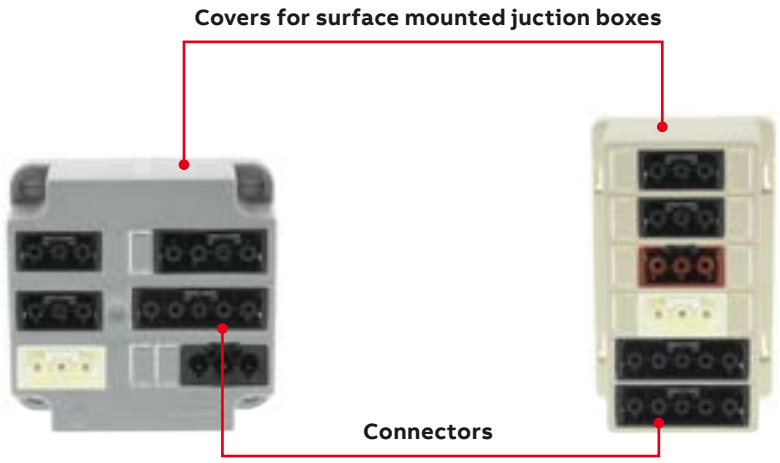

Installation materials
ABB Plug & Play

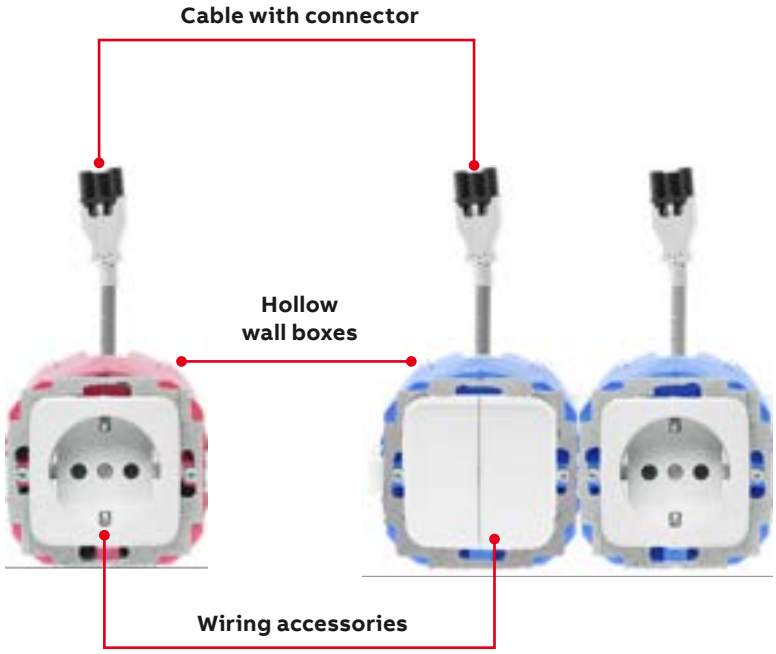

We listen to our customers. We develop and improve our products together with our customers to meet their needs and special requirements. Contact us and tell us your demand.

SE-installationmaterials@abb.com

DIGITAL SERVICES

Electrical installation solutions for buildings
Digital Services

Index

Powerful digital solutions in a single portfolio	2
Plan, configure and modify as desired with the MyBuildings portal powered by ABB Ability™	3
Remote Access, Home Appliances Integration and Cloud-backup	4
Configuration and Commissioning	5
Services	6
Configurators	8
Smarter Home Developer Program	10

You may also visit our MyBuildings portal under mybuildings.abb.com

Digital Services

Powerful digital solutions in a single portfolio

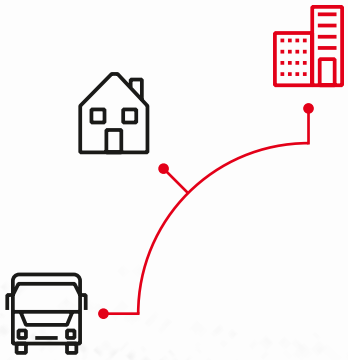

Shaping the future of the digital world today requires fully automated solutions that can be networked with all other intelligent devices.

MyBuildings portal powered by ABB Ability™

Controlling and planning smart buildings is now easier than ever: ABB bundles its digital services for Smarter Home and Building in the MyBuildings portal (formerly my.abb-livingspace.com) under the ABB Ability™ umbrella. The online portal gives you access to many of ABB's tools and services that you can use for your individual needs. You have the option to configure KNX systems, fire alarm technology, door entry system or ABB-tacteo KNX as well as to extend system functionality with remote access or Amazon Alexa voice control. You can also connect your smart system to a mobile device.

Digital Services

Plan, configure and modify as desired with the MyBuildings portal powered by ABB Ability™

—
Planning und configuration

ABB-Welcome configurator
ABB-Terminal configurator
ABB-tacteo configurator
ABB-Smart Home configurator
ABB-Welcome IP configurator

—
Commissioning

Busch-ControlTouch®
Remote access
free@home Alexa voice control
Busch-VoiceControl®

—
Operation

Remote access
free@home Alexa voice control
Notifications
free@home home appliance integration (Miele and Home Connect)
free@home Google Home integration

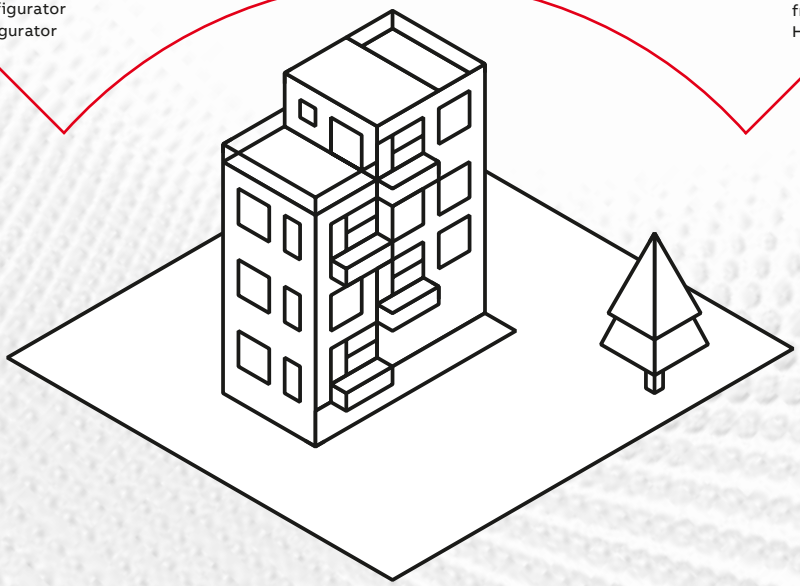

A central contact point for Smarter Building services.

Global availability of ABB services.

24/7 monitoring for best worldwide availability.

Regular cyber security: audits and tests by independent third parties.

Digital Services

Remote Access, Home Appliances Integration and Cloud-backup

ABB-free@home
MyBuildings enables you to check on your ABB-free@home system from anywhere in the world. You can check the status, control functions, and you get notifications in case of events that you can define. All you need is a MyBuildings portal Account and a remote access subscription.

ABB-Welcome
You can also open the door from anywhere in the world to let in the maid or the post delivery man. This way you wont miss a package one more time. All you need is the IP Gateway and a MyBuildings portal Account.

Integration of Home Appliances
The MyBuildings portal allows the easy integration of Smart-Home-capable devices from Miele and Home Connect in ABB-free@home easily. All supported devices appear in the free@home app and the ABB-free@home panel and the main functions can be directly controlled via the wall-mounted pushbuttons.

Digital Services

Configuration and Commissioning

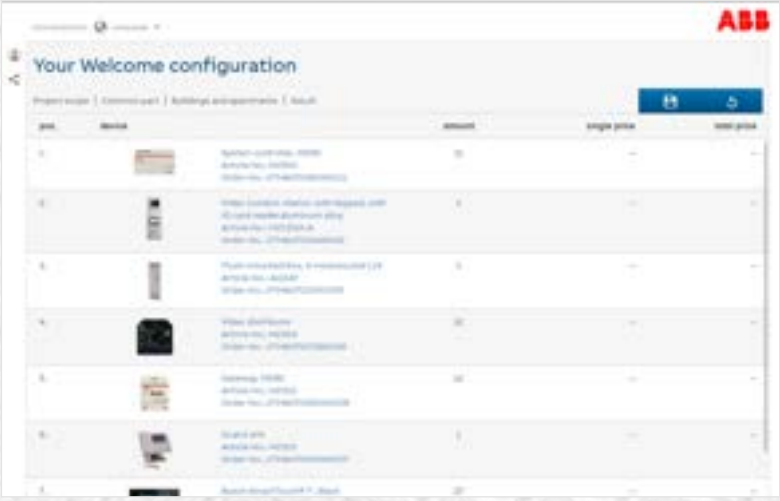

ABB-Welcome Configurator
Planning a door entry system for a residential compound with hundreds of apartments does not have to be difficult. The ABB-Welcome Configurator applies all the planning rules for you. You just need to tell him what you want and need.

ABB-tacteo Configurator
You can configure your individual ABB-tacteo KNX Sensor with the ABB-tacteo configurator. The freedom of planning with KNX is now also reflected on your glass touch sensors on your wall – because every function and scene is unique.

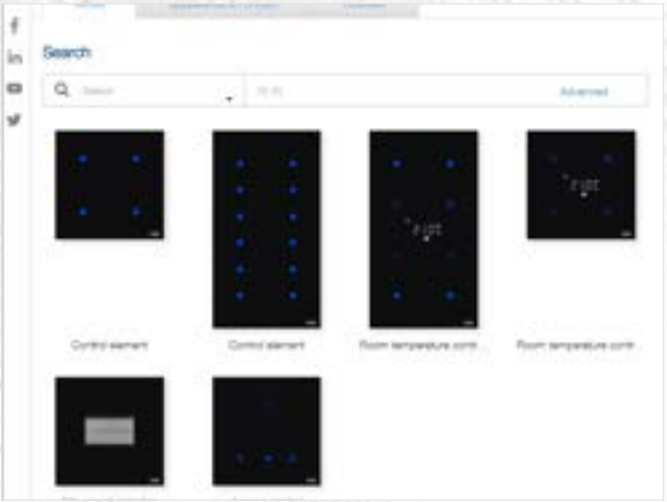

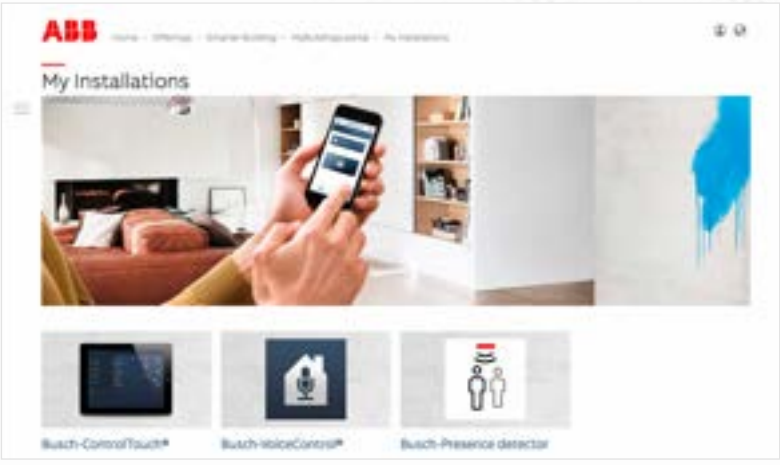

Commissioning through the MyBuildings portal
Via MyBuildings portal you can easily and securely set up remote access for instance to your ABB Smart Home System, set up ABB-free@home Alexa voice control or start the Busch-ControlTouch commissioning.

Digital Services
Services

Remote Access and Notification
Sign up to the MyBuildings Portal to get secure Remote Access to your ABB smart home and smart building system. Check the status, control functions and receive notifications in case of events, which you can define. With a connected ABB-Welcome system see live streams from outdoor stations and open the door from anywhere in the world.

User Account	Price	Available for	URL
required	Subscription needed Trial period available Free of charge for ABB-Welcome	ABB-free@home Busch-ComfortTouch Busch-ControlTouch ABB-Welcome ABB-Welcome IP ABB-VideoControl	mybuildings.abb.com

* The function is currently not available and will be activated later.

Digital Services
Services

Voice Assistant and Home Appliance Integration
The MyBuildings portal allows easy integration of voice assistant devices and home appliances to your ABB smart home and smart building system. Control smart home and building functions via voice and integrate home appliances to push-buttons, wall-mounted panels, groups or scenes.

User Account	Price	Available for	URL
required	Integration of voice assistant is free-of-charge Integration of home appliance is free-of-charge	ABB-free@home (Amazon Alexa, Miele, HomeConnect) free@home Google Home integration Busch-VoiceControl (Amazon Alexa, Apple HomeKit, Google Assistant)	mybuildings.abb.com

Cloud backup
The new presence detectors come with an App for easier commissioning. The MyBuildings portal allows you to save a backup of your settings so can always access certain configurations, even after change of phones or operating systems (e.g. from Android to iOS). MyBuildings portal makes it possible not only the transmission of the device profiles and data of the app to a new smartphone, but also to additional terminal devices.

User Account	Price	Available for	URL
required	free of charge	Busch-Presence detectors	mybuildings.abb.com

Remote Commissioning
Via MyBuildings portal you can easily and securely set up remote access for instance to your ABB Smart Home System, set up ABB-free@home Alexa voice control or start the Busch-ControlTouch commissioning.

User Account	Price	Available for	URL
required	free of charge	Busch-ControlTouch Busch-VoiceControl	mybuildings.abb.com

Digital Services
Configurators

ABB-Welcome
Planning a door entry system for a residential compound with hundreds of apartments does not have to be difficult. The ABB-Welcome Configurator applies all the planning rules for you. You just need to tell him what you want and need.

User Account	Price	URL	Supported Device
not required	free of charge	welcome-configurator. mybuildings.abb.com	iOS and Android tablets and desktop computers

Firealarm system
The firealarm configurator applies all planing rules for you. Just draw the layout of your building and the configurator tells you where smoke detectors should be placed and how many you'll need.

User Account	Price	URL	Supported Device
not required	free of charge	firealarm-configurator. eu.mybuildings.abb.com	iOS and Android tablets and desktop computers

ABB-tacteo
You can configure your individual ABB-tacteo KNX Sensor with the ABB-tacteo configurator. The freedom of planning with KNX is now also reflected on your glass touch sensors on your wall – because every function and scene is unique.

User Account	Price	URL	Supported Device
required for ordering	free of charge	tacteo-configurator. mybuildings.abb.com	iOS and Android tablets and desktop computers

Terminal
Plan and configure your project with classical wiring accessories, KNX or free@home with the terminal configurator by ABB

User Account	Price	URL	Supported Device
not required	free of charge	terminal.mybuildings.abb.com	iOS and Android tablets and desktop computers

Notes

Digital Services
Smarter Home Developer Program

Living is becoming even smarter

ABB's cooperation with renowned partners offers extensive solutions and great added value.

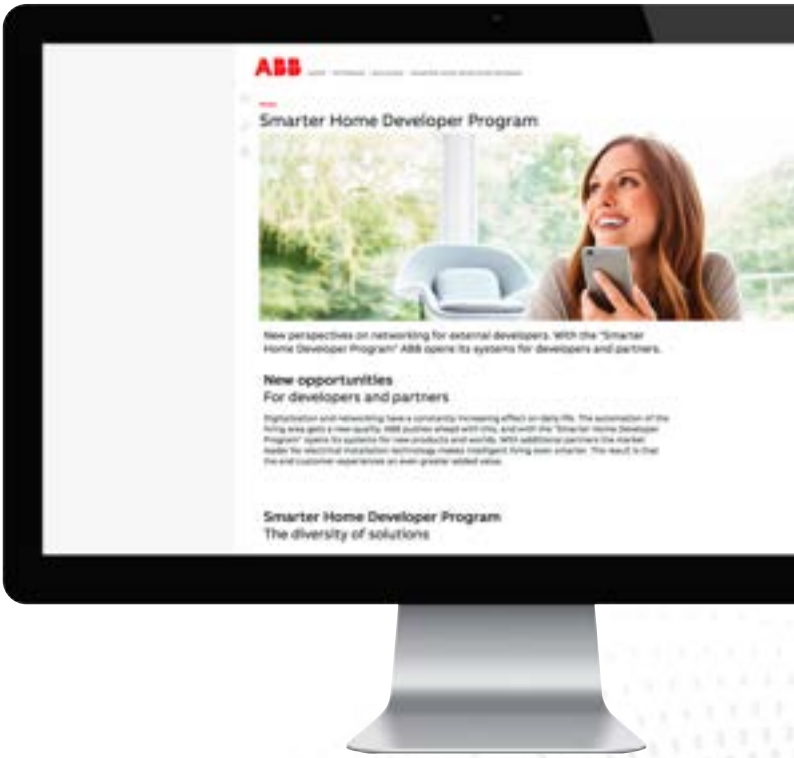

Smarter Home Developer Program

To enable customers to choose from an even greater variety of products in the future, ABB has created the "Smarter Home Developer Program" for developers. The program combines ABB's core offering with solutions from external partners. This enables planners and electricians to equip smart residential buildings with a diverse range of components from different manufacturers and to operate them centrally using ABB products. As an interface for networking, ABB offers application programming interfaces (API).

- Easy and quick integration of your products and services with the ABB product and service portfolio
- Marketing visibility
- Access to households with integrated smart home solutions
- Opportunities to discuss joint offerings with ABB
- Global reach using the smart home portfolio of the two brands Busch-Jaeger and ABB

—
https://developer.eu.mybuildings.abb.com/

Digital Services

Smarter Home Developer Program

ABB-free@home® API
The API for ABB-free@home® allows manufacturers and service providers to integrate data from ABB's Smart Home system into their own program and vice versa.

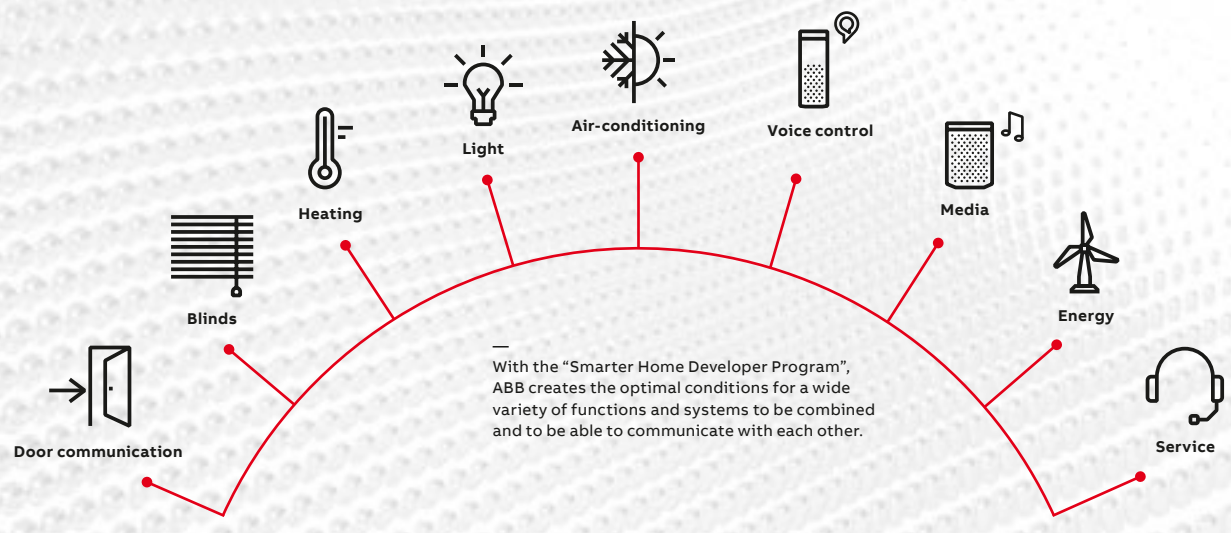

With the "Smarter Home Developer Program", ABB creates the optimal conditions for a wide variety of functions and systems to be combined and to be able to communicate with each other.

ABB I-BUS® KNX

Electrical installation solutions for buildings

ABB i-bus® KNX

Product Range Overview 2025/2026

Index

ABB MyBuildings portal	2
Service & Support Tools	5
Overview	6
Power Supply	8
System Infrastructure and Interfacing	13
Connection and Wiring	19
Multifunction Room Automation	21
Inputs	30
Outputs	35
Shading Control	47
Lighting Control	52
Movement and Presence Detection	67
Heating, Ventilation and Air Conditioning	90
Automation, Logic and Time Control	112
Visualisation, Display and Signalling	116
Energy Management	128
Safety and Monitoring	132
Security	133
User Operation – Design Ranges	140
Unique diversity of the range	140
Functional Overview	142
PEONIA®	162
Yurika	176
ABB tacteo®	182
Busch-priOn®	194
ABB Tenton®	203
ABB Trevion®	209
saga touch™	229
Standard Control Elements	234
Multifunction Control Elements	236
Movement Detectors	240
Room Thermostats	244
Frames	245
Push Button Coupling Unit	254
Millenium	272
Zenit	278
Chiara	296

You may also visit our KNX website:

www.abb.com/knx

CONNECTIVITY

Shaping the future of the digital world today requires fully automated solutions that can be networked with all other intelligent devices.

Powerful digital solutions in a single portfolio

MyBuildings portal powered by ABB Ability™

Controlling and planning smart buildings is now easier than ever: ABB bundles its digital services for Smarter Home and Building in the MyBuildings portal under the ABB Ability umbrella.

The online portal gives you access to many of ABB's tools and services that you can use for your individual needs. You have the option to configure KNX systems, door entry system or ABB tacteo® KNX as well as to extend system functionality with remote access or Amazon Alexa voice control. You can also connect your smart system to a mobile device.

You may visit our MyBuildings portal under mybuildings.abb.com:

Plan, configure and modify as desired with the MyBuildings platform powered by ABB Ability™

Planning und configuration

- ABB Building Planner
- ABB-Welcome configurator
- ABB tacteo® configurator

Commissioning

- KNX APP-Control Server
- Remote access
- Busch-VoiceControl®

Operation

- Remote access
- Amazon Alexa voice control
- Notifications

Your benefits

A central contact point for Smarter Building services.

Global availability of ABB services.

24/7 monitoring for best worldwide availability.

Regular cyber security: audits and tests by independent third parties.

> Table of contents

ABB i-bus® KNX – Service & Support Tools

For a fast and intuitive self-support in your daily work

ABB provides a wide range of tools to enable an uncomplicated and time-saving support for many of your concerns. Below you can find some tools which helps you during configuration and commissioning of your i-bus® KNX installation.

ABB Building Planner
The ABB Building Planner is a digital planning tool that supports the planning process of projects with ABB products. It automatically ensures compliance with sustainability regulations and standards. After the completion of the planning phase, a bill of materials (BOM) is delivered, while additional information could be extracted, e.g., the required number of module widths in the distribution board.

Visit our website



ABB i-bus® Tool
A professional service tool which supports system integrators during commissioning and service of KNX installations. For more information and to download the tool have a look on the linked website.

Visit our website

ABB Update Copy Convert
The ETS app Update Copy Convert provides a series of useful functions for ETS applications and device configuration (parameters and group addresses) in an ETS project.

The functions are:
- Update: Changes the application program to a later or earlier version while retaining current configurations.
- Convert: Transfers/adopts a configuration from an identical or compatible source device.
- Channel Copy: Copies a channel configuration to other channels on a multichannel device.
- Channel Exchange: Exchanges configurations between two channels on a multichannel device.
- Import/Export: Saves and reads device configurations as external files.

Download the app

Firmware Update 2.0
With this ETS app you are able to updating the firmware of your device directly via the KNX bus. The app can be used with the ETS5 or higher.

Download the app

For more tools visit our Building & Home Automation Solutions Tooling Overview

> Table of contents

ABB i-bus® KNX

Overview

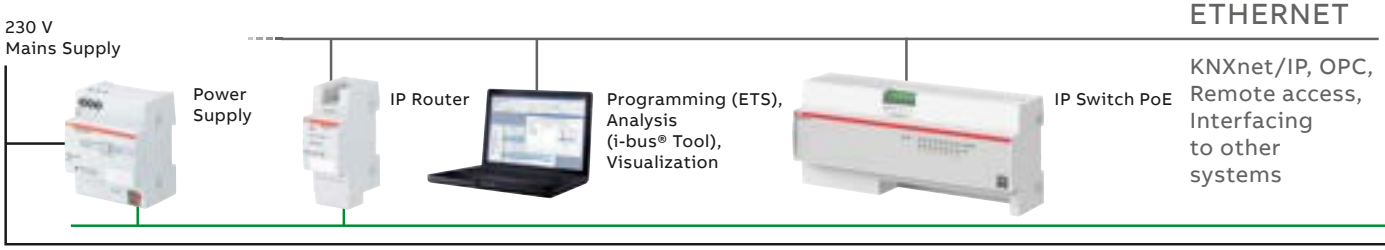

Energy consumption measurement	- Energy Analyzer - Energy Meter with Meter Interface Module - Energy Module
Switch energy with and without current detection	- Switch Actuator
Switch energy with energy measurement	- Energy Actuator - Switch Actuator with Energy Function
Switch, dim and control light	- Universal Dim Actuator - Switch/Dim Actuator 1–10 V - Light Controller
Digital lighting control using DALI	- DALI Gateway - DALI Light Controller
Control of shutters, blinds and ventilation flaps with and without automatic travel time detection	- Blind/Roller Shutter Actuator - SMI Blind/Roller Shutter Actuator
Heating/cooling via valve control	- Holistic HVAC solution ClimaECO - Valve Drive Actuator - Electromotor Valve Drive - FAN Coil Controller - Central HVAC Controller
Ventilation/climatization	- Blower Actuator - Fan Coil Controller
Room solutions with integrated sensor and actuator functions	Room Master devices with different combinations of inputs and outputs and internal logical connections Room Controller with functional modules

KNX-Main Line/TP

- 64 devices/line
- 15 lines/area with superordinated main line
- max. 15 areas with superordinated area line

Line 1 2 3 4 ... ... 13 14 15

Power Supply

Line Coupler

- Binary Input

Detect and evaluate switching commands

- Analogue Input

Capture, evaluate and monitor physical values

- Weather Unit and Weather Sensor

Evaluate and monitor meteorological data (wind speed, temperature, rain, etc.)

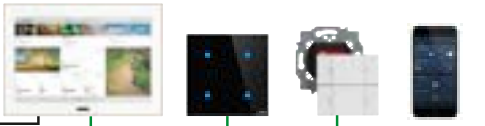

Remote control via internet

Display operating conditions and control functions

- Presence Detector
- Movement Sensor
- Light Sensor

Lighting Control

Detect presence and movement

Measure brightness levels

- Logic Module
- Application Unit Logic
- Application Unit Time
- Time Switch





Perform logical operations and trigger timer-controlled functions

- Room Thermostat
- Air Quality Sensor

Capture, evaluate, monitor and control room conditions, temperature, air quality, etc.

- Security Terminal
- Security Module
- KNX Security Panel
- Fault Monitoring Unit
- Monitoring Unit
- Data Logging Unit



12 V

Monitor operating conditions, signal technical faults, recognize hazards and trigger alarms

- Room outside sensor with card reader
- Transponder Card
- Configuration Software

Access Control system for hotel rooms

ABB i-bus® KNX

Power Supply

	Standard			Diagnostic		Uninter-ruptible
	SV/S 30.160.1.1	**SV/S 30.320.1.1**	**SV/S 30.640.3.1**	**SV/S 30.320.2.1**	**SV/S 30.640.5.1**	**SU/S 30.640.2**
General						
Supply voltage	100 – 240 V AC (85...265 V AC)	100 – 240 V AC (85...265 V AC)	100 – 240 V AC (85...265 V AC)	100 – 240 V AC (85...265 V AC)	100 – 240 V AC (85...265 V AC)	100 – 240 V AC (210...240 V AC)
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	4	4	4	4	4	8
Rated current I_n	160 mA	320 mA	640 mA	320 mA	640 mA	640 mA
Rated voltage U_n	30 V DC	30 V DC	30 V DC	30 V DC	30 V DC	30 V DC
Back-up						
Mains failure back-up time without battery	200 ms	200 ms	200 ms	200 ms	200 ms	200 ms
Mains failure back-up time with new, fully charged battery up to	–	–	–	–	–	AM/S: 10 min SAK7: 2.5 h 2 x SAK7: 5 h 2 x SAK12: 11 h 2 x SAK7: 16 h
Choke						
Integrated choke	■	■	■	■	■	■
Extra Voltage output without choke (30 V DC)	–	–	■	–	■	–
Operation and indication						
Short-circuit and overload indication	■	■	■	■	■	■
Output voltage indication	■	■	■	■	■	■
Overload indication	■	■	■	■	■	■
Bus current indication	–	–	–	■	■	–
Telegram traffic indication	–	–	–	■	■	–
Communication error indication	–	–	–	■	■	–
Bus reset button and indication	–	–	–	■	■	–
Mains voltage indication	■	■	■	■	■	■
Battery voltage indication	–	–	–	–	–	■
Reporting						
Floating contact for fault reporting	–	–	–	–	–	■
Commissioning and diagnostic functions						
Control and diagnosis via ABB i-bus® Tool	–	–	–	■	■	–

■ = Function is supported

– = Function is not supported

SV/S 30.160.1.1

Power Supply, 160 mA, MDRC

KNX power supplies generate and monitor the KNX system voltage (SELV). The bus line is decoupled from the power supply by an integrated choke.
The voltage output is short-circuit and overload protected.
The two-color LED indicates device output status. With two-coloured status indicator and wide range input from 85…265 V AC, 50/60 Hz.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SV/S 30.160.1.1	2CDG110144R0011		0.30	1

SV/S 30.320.1.1

Power Supply, 320 mA, MDRC

KNX power supplies generate and monitor the KNX system voltage (SELV). The bus line is decoupled from the power supply by an integrated choke.
The voltage output is short-circuit and overload protected.
The two-color LED indicates device output status.
With two-coloured status indicator and wide range input from 85…265 V AC, 50/60 Hz.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SV/S 30.320.1.1	2CDG110166R0011		0.30	1

SV/S 30.640.3.1

Power Supply, 640 mA, MDRC

KNX power supplies generate and monitor the KNX system voltage (SELV). The bus line is decoupled from the power supply by an integrated choke. The voltage output is short-circuit and overload protected.
The two-color LED indicates device output status.
Device type SV/S 30.640.3.1 has an additional 30 V DC short-circuit and overload protected voltage output that can be used to power an additional bus line (in combination with a separate choke).
With two-coloured status indicator and wide range input from 85…265 V AC, 50/60 Hz.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SV/S 30.640.3.1	2CDG110167R0011		0.30	1

ABB i-bus® KNX
Power Supply

SV/S 30.320.2.1

Power Supply with Diagnostics, 320 mA, MDRC

Compact Power Supply with integrated choke. Quick diagnostics by LED display and ETS communication objects. Analysis of the operating state and the bus line possible by means of ABB i-bus® Tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SV/S 30.320.2.1	2CDG110145R0011		0.26	1

SV/S 30.640.5.1

Power Supply with Diagnostics, 640 mA, MDRC

Compact Power Supply with integrated choke. Quick diagnostics by LED display and ETS communication objects. Analysis of the operating state and the bus line possible by means of ABB i-bus® Tool. Additional voltage output to supply an additional line in conjunction with an additional choke.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SV/S 30.640.5.1	2CDG110146R0011		0.26	1

SU/S 30.640.2

Uninterruptible KNX Power Supply, 640 mA, MDRC

Uninterruptible power supply 640 mA with integrated choke for supplying an ABB i-bus® KNX bus line, short-circuit- and overload-proof. LEDs to indicate the status of the bus current, mains voltage, and battery voltage. Wide range input from 85…265 V AC, 50/60 Hz. The accumulator module AM/S 12.1 or up to 2 rechargeable batteries can be charged in normal operation by the voltage supply. The bus voltage is provided utilising the batteries in the event of a mains failure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	SU/S 30.640.2	2CDG110275R0011		0.40	1

AM/S 12.1

Battery Module, 12 V DC, MDRC

With lead-gel battery for use in uninterruptible power supply SU/S 30.640.2 and for maintaining the bus voltage during a mains failure for 10 minutes (at full load). Connection is made via 4-core standard cable.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	AM/S 12.1	GHQ6310062R0111		0.81	1

KS/K 4.1

KS/K 2.1

Cable Sets

For connection of sealed lead gel batteries SAK7, SAK12 and SAK17 to the uninterruptible KNX power supply SU/S 30.640.2 or the uninterruptible power supply NTU/S 12.2000.1.
If only one battery is connected, the basic cable set KS/K 4.1 with integrated temperature sensor is to be used. In case two batteries are connected in parallel, the basic cable set KS/K 4.1 is to be used for the first battery and the extension cable set KS/K 2.1 is to used for the second battery. It is not permitted to connect more than two batteries in parallel.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Basic	–	KS/K 4.1	GHQ6301910R0001		0.18	1
Extension	–	KS/K 2.1	GHQ6301910R0011		0.12	1

DR/S 4.1

Choke, MDRC

The device can be used together with a SV/S 30.640.5.1 or SV/S 30.640.3.1 to supply a second line. The device has a reset switch for isolating the bus voltage and resetting the bus devices connected to this line. Connection to ABB i-bus® via Bus Connection Terminal.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	DR/S 4.1	2CDG110029R0011		0.16	1

NTI/Z 28.30.1

Commissioning Power Supply, 28 V DC, 30 mA

For temporary power supply of KNX devices during commissioning. The Euroconnector and plug-in terminal provide faster connection and supply of devices with manual operation (e.g. FCC/S or SA/S).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	NTI/Z 28.30.1	2CDG110096R0011		0.14	1

ABB i-bus® KNX
Power Supply

CP-D 24/2.5

Power Supply Units, MDRC

The supply units that can be used universally as auxiliary power supply in KNX installations or other SELV applications. The devices supply a regulated output voltage of 12 V DC or 24 V DC with a maximum output current of 0.42 A up to 4.2 A. The units are protected against overload, the output being able to sustain a continuous short circuit. LED indication of the status of the supply and output voltage. With a width between one to five modules only, the CP-D range power supplies are ideally suited for the installation in distribution panels. Optimised for world-wide applications: The CP-D power supplies can be supplied with a rated voltage of 100 – 240 V AC.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
12 V DC, 0.83 A	1	CP-D 12/0.83	1SVR427041R1000		0.07	1
12 V DC, 2.1 A	3	CP-D 12/2.1	1SVR427043R1200		0.20	1
24 V DC, 0.42 A	1	CP-D 24/0.42	1SVR427041R0000		0.07	1
24 V DC, 1.3 A	3	CP-D 24/1.3	1SVR427043R0100		0.20	1
24 V DC, 2.5 A	4	CP-D 24/2.5	2CDG120037R0011		0.25	1
24 V DC, 4.2 A	5	CP-D 24/4.2	1SVR427045R0400		0.39	1
Redundancy Unit for decoupling of two CP-D power supply units	2	CP-D RU	1SVR427049R0000		0.08	1

NTU/S 12.2000.1

Uninterruptible Power Supply, 12 V DC, 2 A, MDRC

Delivers sufficient power for all types of demanding applications with a buffered output voltage of 12 V DC (SELV) and a maximum output current of 2 A. Operating malfunctions of the power supply are signalled via a changeover contact and can be sent for evaluation purposes. Up to two 12 V DC sealed lead-acid batteries (gel cell) can be connected in parallel with the power supply, in conjunction with the KS/K 4.1 and KS/K 2.1 cable sets, or the AM/S 12.1 battery module.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	NTU/S 12.2000.1	2CDG110070R0011		0.43	1

ABB IP switches for DIN-Rail installation
Simplifying IP connectivity inside your cabinet

The IP infrastructure plays an important role for the reliability and availability of all building functions.

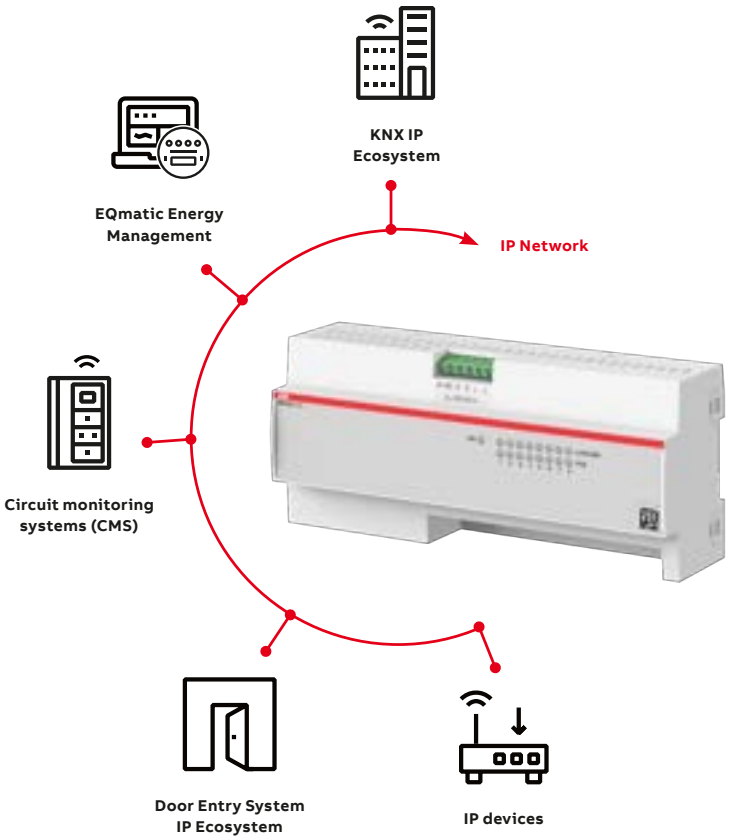

The ABB IP switches are two industrial-grade, 8 Ports, Fast Ethernet, unmanaged switches (with and without PoE) designed for installation in electrical distribution boards and easy mounting on DIN-Rails.

The new ABB IP switches are suitable for all applications, segments and markets in which distribution boards with DIN-Rail devices requiring IP connectivity are used.

- **Special Design**
- **Easy Installation**
- **Compact Technology**

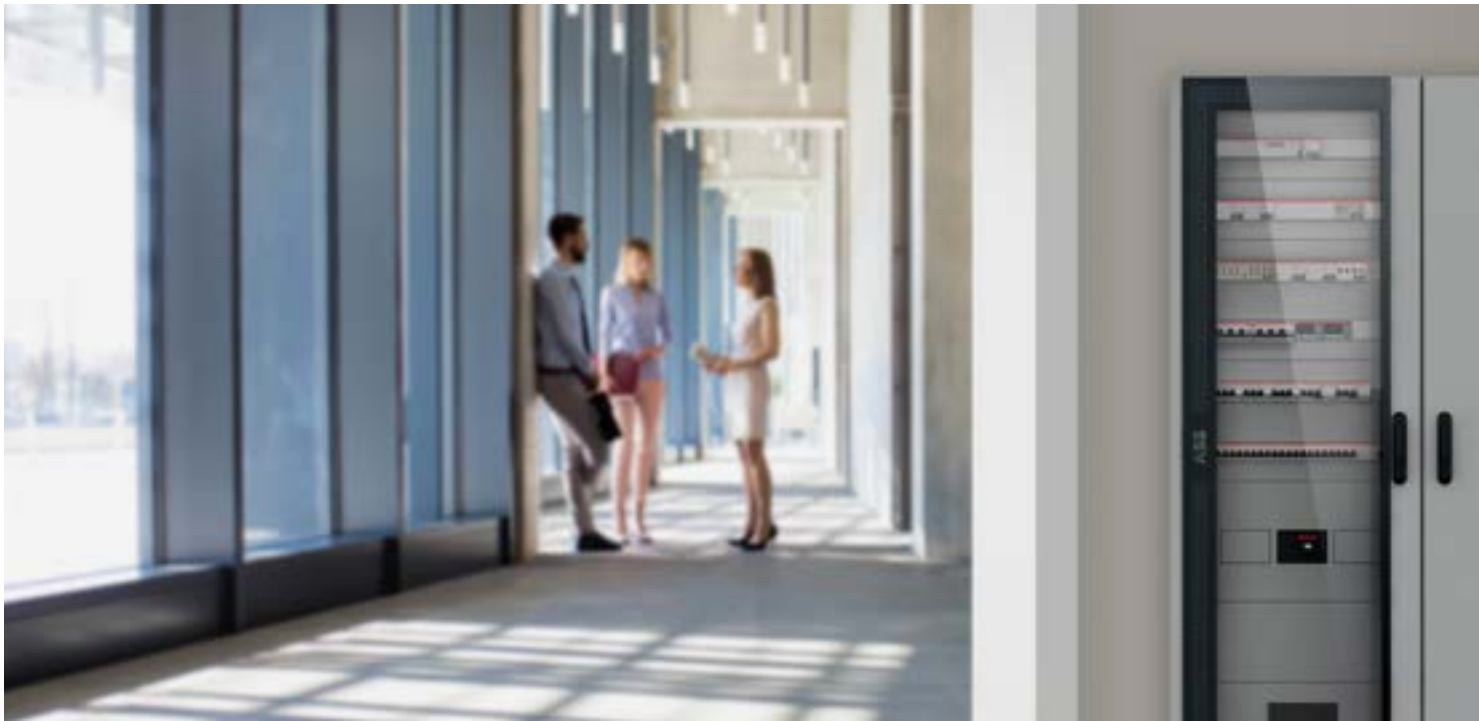

ABB i-bus® KNX

System Infrastructure and Interfacing

	IP Router IPR/S 3.1.1		IP Router Secure IPR/S 3.5.1	IP Interface IPS/S 3.1.1		IP Interface Secure IPS/S 3.5.1	Line Coupler LK/S 4.2		Line Coupler Secure LK/S 4.3
General									
Auxiliary voltage	10...30 V DC or PoE IEEE 802.3af class 1		10...30 V DC or PoE IEEE 802.3af class 1	10...30 V DC or PoE IEEE 802.3af class 1		10...30 V DC or PoE IEEE 802.3af class 1	–		–
Type of installation	DIN-Rail		DIN-Rail	DIN-Rail		DIN-Rail	DIN-Rail		DIN-Rail
Application	IP Router/ 1.1	IP Router/ 2.0	IP Router Secure/ 1.0	IP Interface/ 1.1	IP Interface/ 2.0	IP Interface Secure/ 1.0	Couple/1.1 or Repeat/1.1	Couple Repeat/2.1	Line/Area/ Segment Coupler Secure/1.0
ETS	ETS 3	ETS 4/5	ETS 5	ETS 3	ETS 4/5	ETS 5	ETS 3	ETS 4/5	ETS 5/6
Software functions									
KNX Secure	–	–	■	–	–	■	–	–	■
Secure Proxy	–	–	–	–	–	–	–	–	■
Number of tunneling servers	1	5	5	1	5	5	–	–	–
Number of unicast connections	10	10	10	–	–	–	–	–	–
Monitoring of bus voltage failure	■	■	■	–	–	–	–	–	–
Filter Group telegrams main group 0...13	■	■	■	–	–	–	■	■	■
Filter Group telegrams main group 14...31	–	■ (ETS 4.1.7 or higher)	■	–	–	–	–	■	■
Function Repeater	–	–	–	–	–	–	■	■	■ [1]
Segment Coupler	–	–	–	–	–	–	–	–	■
Commissioning and diagnostic functions									
Control and diagnosis via ABB i-bus® Tool	■	■	■	■	■	■	■	■	–
Firmware update (ABB i-bus® Tool or ETS App)	■	■	■	■	■	■	–	–	■
Unicast parameterization (ABB i-bus® Tool)	■	■	■	–	–	–	–	–	–

■ = Function is supported

– = Function is not supported

1) Function Repeater available with Application “Couple repeat/2.1”

LK/S 4.3

Line Coupler Secure, MDRC **NEW**

The line coupler is used in larger installations to connect KNX lines or areas. The lines or areas are galvanically isolated from one another. Telegrams can be filtered to simultaneously reduce the telegram traffic between lines or areas. The device supports long frames (from > ETS5) and KNX Data Secure communication. KNX Data Secure telegrams are processed, filtered, forwarded, or blocked depending on settings. From ETS 6, the device can also be used as segment coupler to connect line segments with each other (incl. filter function). As Secure Proxy it connects KNX standard (not secured) with KNX data secure lines or line segments. Downwards compatible with LK/S 4.2.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	LK/S 4.3	2CDG110310R0011		0.1	1

LK/S 4.2

Line Coupler, MDRC **To be discontinued**

The line coupler is used in larger installations to connect KNX lines or areas. The lines or areas are galvanically isolated from one another. Telegrams can be filtered to simultaneously reduce the telegram traffic between lines or areas. With ETS 4 (V4.1.2 and higher) the complete group address range of the main groups 0...31 can be filtered. Within a line, the LK/S 4.2 can also be used as a line amplifier (repeater). The device supports long frames (from > ETS5) and KNX Data Secure communication. KNX Data Secure telegrams are processed, filtered, forwarded, or blocked depending on settings.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	LK/S 4.2	2CDG110171R0011		0.1	1

IPR/S 3.5.1

IP Router Secure, MDRC

Connects the KNX bus with the Ethernet network and encrypts communication on the IP backbone. The device uses the KNXnet/IP Secure protocol for communication (Routing and Tunneling). It can be used as a fast line and area coupler. The full filter table for main groups 0-31 is supported. KNX devices can be programmed via the LAN using ETS. For this and further clients 5 Secure Tunneling Servers are available. The IP address can be fixed or can be received from a DHCP server. Power supply via 12…30 V DC or PoE (IEEE 802.3af class 1). The KNX Standard Communication (Multicast) can be switched off. In this case, up to 10 IPR/S 3.5.1 can communicate using unicast communication. The device supports long frames (from > ETS5). KNX Data Secure telegrams are processed, filtered, forwarded or blocked depending on settings.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	IPR/S 3.5.1	2CDG110176R0011		0.11	1

ABB i-bus® KNX

System Infrastructure and Interfacing

IPR/S 3.1.1

IP Router, MDRC

Connects the KNX bus with the Ethernet network. The device uses the KNXnet/IP protocol for communication (Routing and Tunneling). It can be used as a fast line and area coupler. The full filter table for main groups 0-31 is supported. KNX devices can be programmed via the LAN using ETS. For this and further clients 5 Tunneling Servers are available. The IP address can be fixed or can be received from a DHCP server. Power supply via 12…30 V DC or PoE (IEEE 802.3af class 1). The KNX Standard Communication (Multicast) can be switched off. In this case, up to 10 IPR/S 3.1.1 can communicate using unicast communication.
The device supports Long Frames which allows faster download and download of KNX Secure devices.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	IPR/S 3.1.1	2CDG110175R0011		0.11	1

IPS/S 3.5.1

IP Interface Secure, MDRC

Connects the KNX bus with the Ethernet network and encrypts communication. The device uses the KNXnet/IP Secure protocol for communication (Tunneling). KNX devices can be programmed via the LAN using ETS. For this and further clients 5 Secure Tunneling Servers are available. The IP address can be fixed or can be received from a DHCP server. Power supply via 12…30 V DC or PoE (IEEE 802.3af class 1). The device supports long frames (from > ETS5). KNX Data Secure telegrams can be forwarded.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	IPS/S 3.5.1	2CDG110204R0011		0.11	1

IPS/S 3.1.1

IP Interface, MDRC

Connects the KNX bus with the Ethernet network. The device uses the KNXnet/IP protocol for communication (Tunneling). KNX devices can be programmed via the LAN using ETS. For this and further clients 5 Tunneling Servers are available. The IP address can be fixed or can be received from a DHCP server. Power supply via 12…30 V DC or PoE (IEEE 802.3af class 1). The device supports Long Frames which allows faster download and download of KNX Secure devices.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	IPS/S 3.1.1	2CDG110177R0011		0.11	1

IS/S 8.1.1

IP Switch, 8 Ports, Fast Ethernet, MDRC

The IP Switch is an industrial-grade, 8 Ports, Fast Ethernet (100 Mbit/s), unmanaged switch with plug-and-play capabilities, designed for installation in electrical distribution boards and small housings for rapid mounting on 35 mm DIN rails (to EN 60715).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	IS/S 8.1.1	2CDG120082R0011		0.25	1

ISP/S 8.1.1.1

IP Switch PoE, 8 Ports, Fast Ethernet, 55 W, MDRC

The IP Switch PoE is an industrial-grade, 8 Ports, Fast Ethernet (100 Mbit/s), PoE (55 W), unmanaged switch with plug-and-play capabilities, designed for installation in electrical distribution boards and small housings for rapid mounting on 35 mm DIN rails (to EN 60715).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	12	ISP/S 8.1.1.1	2CDG120083R0011		0.41	1

IPM/S 1.1

IP Patch Module, MDRC

The IP Patch Module consists of an RJ-45 module and a mounting adapter for rail mounting.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	1	IPM/S 1.1	2CDG120036R0011		0.1	1

USB/S 1.2

USB Interface, MDRC

Connects the KNX installation with PC software clients such as ETS or visualisations (programming, bus monitor, group monitor). The device supports Long Frames which allows faster download and download of KNX Secure devices.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	USB/S 1.2	2CDG110243R0011		0.08	1

LL/S 1.1

Optical Fibre Interface, MDRC

The device is used to couple two sections of an bus line using an optical fibre link. Ideal for bridging longer distances or to avoid having to implement lightning and overvoltage protection when laying cables between buildings. Two devices are needed to complete a transmission link.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	LL/S 1.1	GHQ6050053R0001		0.28	1

ABB i-bus® KNX

System Infrastructure and Interfacing

MG/S 11.100.1.1

Modbus RTU Client – KNX TP Gateway, 100 Points, MDRC

The Modbus KNX Gateway integrates Modbus RTU server devices with KNX installations at field level. The devices support standard KNX data point types (DPTs) and up to 100 data points. The device is put into operation with the ETS. An optional, free-of-charge ETS app (DCA) is available to facilitate the configuration, allowing to export, and import Modbus-KNX mapping in the form of templates. Modbus component templates are also be available for download from a database. Auxiliary voltage is not required.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	MG/S 11.100.1.1	2CDG120089R0011		0.82	1

ABB i-bus® KNX
Connection and Wiring

DSM/S 1.1

Diagnosis and Protection Module, MDRC

Enables quick diagnosis of the bus state and indicates telegram traffic via an LED. A bus fault is indicated by contacts. The DSM also suppresses transient overvoltages and interference voltage spikes on the bus and thus protects the connected devices.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	DSM/S 1.1	2CDG110060R0011		0.11	1

SPD/S 1.1

Surge Protective Device

KNX surge protective devices are capable of discharging direct and indirect lightning strikes causing induced or conducted overvoltages between lines (differential) and lines to ground (common mode) and are safely kept well below the withstand voltages of the KNX system. They are installed between buildings or KNX zones to provide safe isolation from surges. End of life protection indication is provided from the pushbutton, simply depress the push-button and make sure green indicator illuminates. If no indication then replacement is required.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	SPD/S 1.1	7TCA085400R0448		0.1	1

VB/K ...

Wiring Jumpers

For the interconnection of devices with a bus connection terminal. The vertical and horizontal versions are matched to typical wiring applications.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
horizontal, 100 mm	–	VB/K 100.1	GHQ6301908R0003		0.06	10
horizontal, 200 mm	–	VB/K 200.1	GHQ6301908R0001		0.07	10
vertical, 270 mm	–	VB/K 270.1	GHQ6301908R0002		0.11	10
vertical, 360 mm	–	VB/K 360.1	GHQ6301908R0004		0.16	10

PS 1/4/6-KNX

PS-END 1-S

Busbars

Busbar for connection several floating supply contacts of a device (e.g. SD/S, SA/S, ...). Reducing the wiring effort and create a secure load-connection. The PS1/4/6 is ready assembled and can be used immediately. The PS 1/60/6 is cut to the required length and closed with the end cap PS-END 1-S.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1 Phase, 4 Contacts	–	PS 1/4/6-KNX	2CDG924003R0011		0.012	10
1 Phase, 60 Contacts	–	PS 1/60/6-KNX	2CDG924004R0011		0.11	1
End Cap for busbar	–	PS-END 1-S	2CDL000001R0001		0.001	25

ABB i-bus® KNX

Connection and Wiring

US/E 1

Connection Terminals

For connecting bus devices as well as for looping through or branching the bus cable. Available in black/red for use as bus connecting terminal, in blue as bus connecting terminal with surge protector and in white/yellow for use as a connecting terminal.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Bus Connection Terminal, 50 Pieces, black/red	–	BUSKLEMME	GHQ6301901R0001		0.01	50
Connection Terminal, 50 Pieces, white/yellow	–	KLEMME	GHQ6301902R0001		0.01	50
Connection Terminal with Surge Arrester	–	US/E 1	GHQ6310009R0001		0.01	1

STR/Z 1.50.1

Label Carrier for DIN-rail Devices, 50 Pieces

Snap-on label carrier consisting of transparent carrier plate and insertable blank paper labels.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	STR/Z 1.50.1	2CDG110149R0011		0.04	50

ABB i-bus® KNX

Multifunction Room Automation –
Room Controller

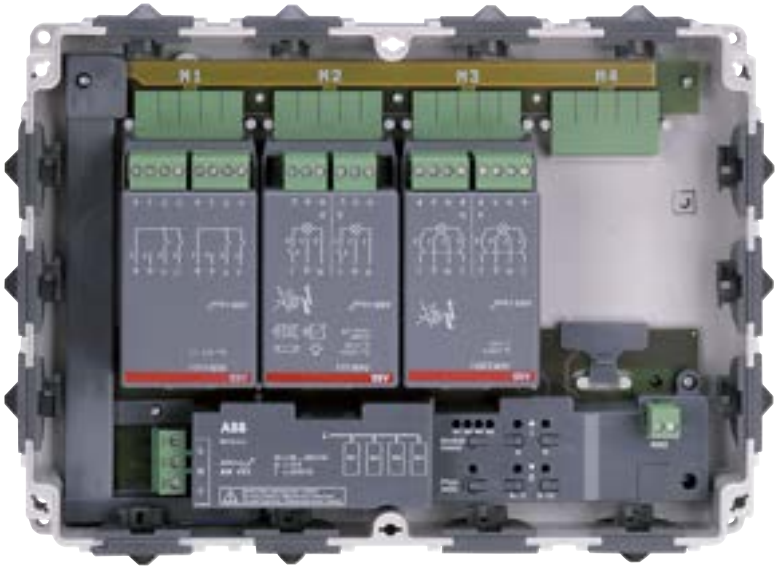

ABB i-bus® KNX

Multifunction Room Automation – Room Controller

The fundamental principle:
One device per room
A single Room Controller controls all the room functions.
This “one device per room” principle economically and flexibly provides KNX functionality: With 4 or 8 modules, which are simply inserted into the basis device, all loads in this room (lights, blinds, heating, etc.) can be controlled.

Economic security from the outset
The installation concept of the Room Controller, particularly the simple plug-in module concept, provides security and reliability.

- **When planning the infrastructure of a building:**
  - It can be undertaken without exact knowledge of the subsequent user demands.
- **During commissioning:**
  - When user demands have been determined, they are implemented by simple insertion of modules.
- **In operation in a building:**
  - Modifications to the room utilisation are easy to implement.
  - The changes to the cable routing are limited to the room concerned.

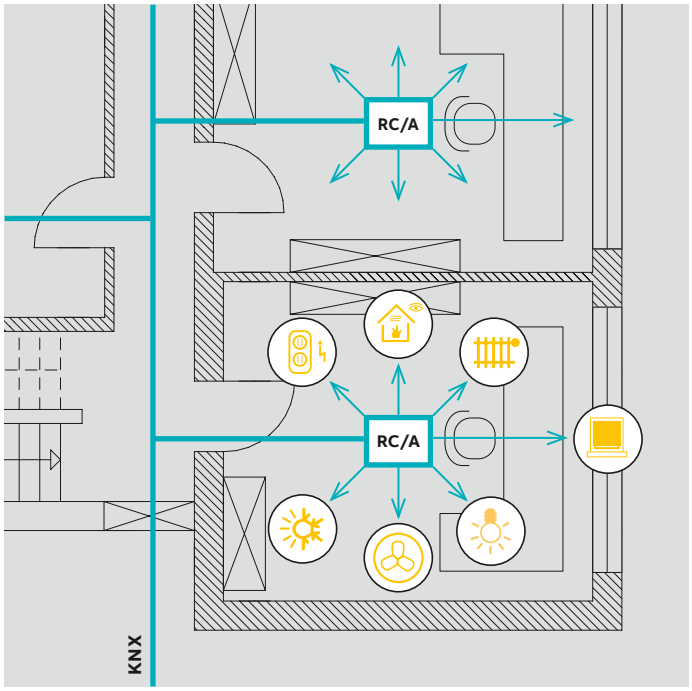

Improved fire protection included
The significant reduction in the wiring also considerably reduces the fire load and thus improves safety for persons and assets.

Save on energy and not on comfort
Each room is used differently. The different module assignments of the Room Controller can be configured accordingly.
Just three examples of special building functions that can be implemented with the device.

In the lighting sector
Constant lighting control is not the only conceivable solution.
A high level of comfort can be assured by the control of different light scenes.

Blinds and roller shutters
Not only do they provide pleasant shading, they also assist in responsible use of energy. Intelligent facade controls move the blinds to suit the position of the sun.

Heating/Ventilation/Air conditioning
The control of electrothermal valves on radiators is no problem for the “electronic switch actuator” module of the Room Controller. The ventilation can also be integrated into this automatic control.

Overview of switching performance

	SA/M 2.6.1	SA/M 2.16.1	SD/M 2.6.2	LR/M 1.6.2	ES/M 2.230.1	ES/M 2.24.1
Outputs						
Load circuits	2 relay outputs	2 relay outputs, floating	2 relay outputs	1 relay output	2 semi-conductor outputs for resistive loads, inrush current: max. 1 A, continuous current: max. 700 mA	2 semi-conductor outputs for resistive loads, inrush current: max. 1 A, continuous current: max. 700 mA
U_n rated voltage	250/440 V AC	250/440 V AC	250/440 V AC	250/440 V AC	115/230 V AC	24 V AC/DC
I_n rated current	6 AX	16 A	6 AX	6 AX	700 mA	700 mA
Control outputs	–	–	2 x 1…10 V DC (passive)	1 x 1…10 V DC (passive)	–	–
Max. control current	–	–	30 mA	30 mA	–	–
Max. cable length	–	–	100 m	100 m	–	–
Switching current per output						
AC3 operation (cos ϕ = 0.45) EN 60 947-4-1	6 A/230 V	8 A/230 V	6 A/230 V	6 A/230 V	–	–
AC1 operation (cos ϕ = 0.45) EN 60 947-4-1	6 A/230 V	16 A/230 V	6 A/230 V	6 A/230 V	–	–
Fluorescent lighting load AX to EN 60 669	6 A/250 V (70 µF)	16 A/250 V (70 µF)	6 A/250 V (70 µF)	6 A/250 V (70 µF)	–	–
Minimum switching capacity	100 mA/12 V 100 mA/24 V	100 mA/12 V 100 mA/24 V	100 mA/12 V 100 mA/24 V	100 mA/12 V 100 mA/24 V	–	–
DC current switching capacity (resistive load)	6 A/24 V=	16 A/24 V=	6 A/24 V=	6 A/24 V=	–	–

—

– = Not applicable

ABB i-bus® KNX

Multifunction Room Automation – Room Controller

Overview of switching performance

	SA/M 2.6.1	SA/M 2.16.1	SD/M 2.6.2	LR/M 1.6.2	ES/M 2.230.1	ES/M 2.24.1
Lamp loads at 230 V AC						
– Incandescent lamp load	1380 W	2300 W	1380 W	1380 W	–	–
Fluorescent lamps T5/T8						
– Uncompensated	1380 W	2300 W	1380 W	1380 W	–	–
– Parallel compensated	1380 W	1500 W	1380 W	1380 W	–	–
– DUO connection	1380 W	1500 W	1380 W	1380 W	–	–
Low-volt halogen lamps						
– Inductive transformer	1200 W	1200 W	1200 W	1200 W	–	–
– Electronic transformer	1380 W	1500 W	1380 W	1380 W	–	–
– Halogen lamp 230 V	1380 W	2300 W	1380 W	1380 W	–	–
Dulux lamp						
– Uncompensated	1100 W	1100 W	1100 W	1100 W	–	–
– Parallel compensated	1100 W	1100 W	1100 W	1100 W	–	–
Mercury-vapour lamp						
– Uncompensated	1380 W	2000 W	1380 W	1380 W	–	–
– Parallel compensated	1380 W	2000 W	1380 W	1380 W	–	–
Switching capacity						
– Max. peak inrush-current Ip (150 µs)	400 A	400 A	400 A	400 A	–	–
– Max. peak inrush-current Ip (250 µs)	320 A	320 A	320 A	320 A	–	–
– Max. peak inrush-current Ip (600 µs)	200 A	200 A	200 A	200 A	–	–
Number of electronic ballasts (T5/T8, single element)						
– 18 W (ABB EVG 1x18 CF)	23	23	23	23	–	–
– 24 W (ABB EVG-T5 1x24 CY)	23	23	23	23	–	–
– 36 W (ABB EVG 1x36 CF)	14	14	14	14	–	–
– 58 W (ABB EVG 1x58 CF)	11	11	11	11	–	–
– 80 W (Helvar EL 1x80 SC)	10	10	10	10	–	–

Further technical specifications can be found in the corresponding product manuals at www.abb.com/knx

– = Not applicable

ABB i-bus® KNX

Multifunction Room Automation – Room Controller Basis Devices

Configuration example

Room Controller

The Room Controller controls all the functions in the room as a central device. Due to its modular design, it can be adapted flexibly to the required functionality.
On-site installation enables short assembly and commissioning times. A structured cable entry creates clarity and flexibility for changes in function – both during planning and operation.

Special features

- Height 50 mm: optimised for underfloor installation or suspended ceilings
- Room Controller counts as just one bus device
- Robust housing, IP 54 degree of protection
- Manual operation for immediate testing – even without bus voltage
- Comprehensive software functionality

RC/A 4.2

Room Controller, Basis Device for 4 Modules, SM

It accommodates up to 4 plug-in modules and controls their functions. The RC/A 4.2 communicates as a bus device. Any module type can be plugged into each module slot. A manual control for module function test is integrated.
Dimensions (H x W x D): 200 mm x 275 mm x 50 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RC/A 4.2	2CDG110104R0011		0.98	1

RC/A 8.2

Room Controller, Basis Device for 8 Modules, SM

It accommodates up to 8 plug-in modules and controls their functions. Any module type can be plugged into each module slot. The inserted module is automatically detected.
The manual operation facility enables an immediate function test even when bus voltage is not applied. Dimensions (H x W x D): 270 mm x 316 mm x 50 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RC/A 8.2	2CDG110106R0011		1.695	1

ABB i-bus® KNX

Multifunction Room Automation – Room Controller Function Modules

BE/M 4.230.1

Binary Input Modules, 4-fold

Each of the modules provides 4 inputs. There are 3 module types available for the connection of 115/230 V, 12/24 V (AC or DC) or floating contacts to cover all demands.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
230 V	–	BE/M 4.230.1	2CDG110005R0011		0.13	1
12/24 V	–	BE/M 4.24.1	2CDG110006R0011		0.13	1
Contact Scanning	–	BE/M 4.12.1	2CDG110007R0011		0.13	1

SA/M 2.6.1

Switch Actuator Module, 2-fold, 6 A

For switching loads up to 16 A at a maximum continuous current of 6 A.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SA/M 2.6.1	2CDG110002R0011		0.17	1

SA/M 2.16.1

Switch Actuator Module, 2-fold, 16 A

Switches up to 16 A with two floating relay contacts. The feeding voltage is independent from the Room Controller Basis Device. It must thus be applied directly to the module.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SA/M 2.16.1	2CDG110100R0011		0.16	1

JA/M 2.230.1

Shutter Actuator Modules, 2-fold

For controlling two independent blind or shutter drives. There are two module types available for 115/230 V AC or 24 V DC drives.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
230 V AC	–	JA/M 2.230.1	2CDG110003R0011		0.17	1
24 V DC	–	JA/M 2.24.1	2CDG110004R0011		0.17	1

SD/M 2.6.2

Switch/Dim Actuator Module, 2-fold, 6 AX

It enables the switching and dimming of two groups of luminaries in conjunction with electronic ballasts via a 1...10 V control voltage.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SD/M 2.6.2	2CDG110107R0011		0.17	1

LR/M 1.6.2

Light Controller Module, 1-fold, 6 AX

Enables the switching and dimming of one group of luminaires via a 1...10 V control voltage. The device can be used for constant lighting control in connection with a Light Sensor LF/U 2.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	LR/M 1.6.2	2CDG110108R0011		0.13	1

ES/M 2.230.1

Electronic Switch Actuator Module, 2-fold

With 2 overload-proof outputs for noiseless control of heating systems and chilled ceilings via thermoelectric valve drives. Two module types for voltages from 115/230 V or 24 V (AC or DC) are available.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
115/230 V	–	ES/M 2.230.1	2CDG110013R0011		0.15	1
24 V	–	ES/M 2.24.1	2CDG110014R0011		0.15	1

ABB i-bus® KNX

Multifunction Room Automation – Room Master

	Room Master Basic RM/S 1.1	Room Master Premium RM/S 2.1	Room Master RM/S 3.1	Room Master RM/S 4.1
General				
Supply voltage	KNX	KNX	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	8	12	12	8
Current consumption, bus	< 12 mA	< 24 mA	< 12 mA	< 12 mA
Inputs				
Binary inputs (for potential free contacts via contact scanning)	8	18	12	8
Outputs				
Switching capacity 20 A (16 AX) [1]	1	3	4	–
Switching capacity 16 A (10 AX) [2]	2	1	–	–
Switching capacity 6 A [3]	3 (configurable as switch or fan outputs)	12 (3 configurable as switch or fan outputs)	–	8
0.5 A electronic (for max. 2 electrothermal or motor valve drive controls)	2	2	–	–
6 A changeover contact (Blind or Shutter control)	–	1	4 (configurable also as switch outputs)	–
Functions				
Lighting control (Switching)	■	■	■	■
Heating/Cooling (Electrothermal or motor valve drive control, 3-level fan speed control)	■	■	■	■
Shading control (Shutter, blinds or curtains)	–	■	–	–
Control of further loads via switched electrical sockets	■	■	■	■
Internal connection of inputs and outputs without group adresses	■	■	■	■
Scenes	■	■	■	■
Room scenarios	■	■	■	■
Application with preconfigured inputs and outputs	■	■	–	–
Programmable with predefined and tested example projects (ETS 4) for different fields of application (office, schools, hotel rooms, ...)	–	–	■	–
Planning templates	–	–	■	–

■ = Function is supported

– = Function is not supported

1) = Switching capacity, see Switch Actuators SA/S x.16.5.1

2) = Switching capacity, see Switch Actuators SA/S x.10.2.1

3) = Switching capacity, see Switch Actuators SA/S x.6.1.1

RM/S 1.1

RM/S 2.1

RM/S 3.1

RM/S 4.1

Room Master

The Room Master is a KNX device with a combination of inputs and outputs. The quantities, technical data and the functions of these inputs and outputs are compiled, so that overall control of all the functions in rooms of a live-in character or apartments, are implemented via a device. Typical areas of application of the Room Master are hotel rooms, hospital rooms as well as apartments in institutions for residential care or in student residential homes. The Room Master with its compact design covers all the basic requirements for Lighting control, Heating/Air conditioning, Shading control (shutters, blinds or curtains – with the RM/S 2.1) and Control of further loads via switched electrical sockets. Function extensions are possible at any time, e.g. devices for dimming via ABB i-bus® KNX.

Overview of the inputs and outputs

	RM/S 1.1	RM/S 2.1	RM/S 3.1	RM/S 4.1	Application possibilities
Binary inputs via contact scanning	8	18	12	8	For connection of switches or push-buttons (light on/off, shutter up/down,etc.) or sensors (window contacts, door contacts, water sensors, condensation water sensors, hotel card readers, etc.)
Outputs 20 A (16 AX)	1	3	4	–	Bathroom fan, switching of electrical sockets
Outputs 16 A (10 AX)	2	1	–	–	Auxiliary electrical heating of fan-coil units (at RM/S 1.1 and 2.1), lighting
Outputs 6 A	3	12	–	8	3-speed fan control (at RM/S 1.1 and 2.1), lighting
Outputs 0.5 A electronic	2	2	–	–	Valve control (heating, cooling) for max. 2 seperate valves
Outputs 6 A changeover contact	–	1	4 (config-urable as switch outputs too)	–	Blind or roller blind control

- RM/S 1.1 and RM/S 2.1 are preprogrammed ex factory
- RM/S 3.1 and RM/S 4.1 are programmable with predefined and tested example projects (ETS 4) for different fields of application (office, schools, hotel rooms, ...)
- Commissioning of the preprogrammed devices on the construction site without notebook and ETS programming. With the electrical connection all room functions are available.
- Optional functional extensions via integration into KNX networks with ETS software.

Further information about Room Master on www.abb.com/knx

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	RM/S 1.1	2CDG110094R0011		0.45	1
	12	RM/S 2.1	2CDG110095R0011		0.76	1
	12	RM/S 3.1	2CDG110165R0011		0.55	1
	8	RM/S 4.1	2CDG110170R0011		0.3	1

ABB i-bus® KNX
Inputs

Wide-range inputs and a streamlined range – The ABB i-bus® KNX Binary Inputs.

ABB i-bus® KNX Binary Inputs serve as an interface for operation of KNX systems via conventional push buttons and switches as well as for processing binary signals (signalling contacts).

These Binary Inputs with wide-range inputs are available with 4, 8, 10, 12 and 16 inputs.

In addition to the five devices with wide-range inputs, the ABB i-bus® KNX Binary Input product range is rounded off by three devices with 4, 10 and 16 inputs with scanning voltage. On these types, a pulsed scanning voltage is provided for connection of floating contacts from the device.

All Binary Inputs feature **a high-quality membrane keypad for comfortable manual operation and display of the device functions.** Input states can be simulated at the device, so that the conventional push buttons, switches or floating contacts do not need to be connected for commissioning purposes. The device functions can be easily tested during commissioning in this way.

The Binary Inputs are powered via the KNX and do not require an additional power supply.

The software functionality of the Binary Inputs has also been extended. It is now possible to send **several switching telegrams with just a single push of a button.** Especially useful, just as in the case of the Switch Actuators, it is also possible **to copy the channels of the device in the ETS.** The parameters and group addresses of a channel can be simply transferred to other channels in this way. Or it is possible to use the new templates for each application. Both options simplifies project engineering and helps reduce sources of errors and reducing commissioning time.

Application
- Operation of KNX systems via conventional push buttons and switches
- Processing of binary signals (signalling contacts)

Benefits
- Flexible application due to wide-range inputs
- Reduced commissioning time when using the templates or the copy function
- KNX Data Secure
- A wide range of functions
- Simplified complex functions

Products
- BE/S4.20.3.2 Binary Input, 4-fold, Contact Scanning, Manual Operation
- BE/S10.20.3.2 Binary Input, 10-fold, Contact Scanning, Manual Operation
- BE/S16.20.3.2 Binary Input, 16-fold, Contact Scanning, Manual Operation
- BE/S4.230.3.2 Binary Input, 4-fold, 10-230 V, Manual Operation
- BE/S8.230.3.2 Binary Input, 8-fold, 10-230 V, Manual Operation
- BE/S10.230.3.2 Binary Input, 10-fold, 10-230 V, Manual Operation
- BE/S12.230.3.2 Binary Input, 12-fold, 10-230 V, Manual Operation
- BE/S16.230.3.2 Binary Input, 16-fold, 10-230 V, Manual Operation

	BE/S x.20.3.2	BE/S x.230.3.2	US/U x.3	US/U 12.2
General				
Voltage range	–	10…230 V	–	–
Voltage type	–	AC/DC	–	–
Contact scanning	■	–	■	■
Number of Inputs	4, 10, 16	4, 8, 10, 12, 16	2, 4	12
Type of installation	MDRC	MDRC	FM	FM
Module width (space unit)	2, 4, 6	2, 4, 4, 6, 6	–	–
Manual Operation	■	■	–	–
Functions (Device)				
KNX Data Secure	■	■	■	–
Logic functions (AND, OR, XOR)	4, 12, 16	4, 8, 12, 12, 16	4	–
Manual operation	■	■	–	–
Manual operation status	■	■	–	–
Input status	■	■	–	–
Enable/Disable manual operation	■	■	–	–
Enable/Disable inputs	■	■	■	■
Limit number of telegrams	■	■	■	■
Device sends an „In operation“ telegram	■	■	■	–
Filter adjustment	–	■	–	–
Functions (Inputs)				
Switch	■	■	■	■
Switch (2-button)	■	■	■	–
Blind/Shutter	■	■	■	■
Blind/Shutter (2-button)	■	■	■	–
Switch/Dim	■	■	■	■
Switch/Dim (2-button)	■	■	■	–
Scenes	■	■	■	■
Send value/Multiple operation	■	■	■	■
Fault indicator	■	■	■	■
Switching sequence	■	■	■	■
Switching sequence (2-button)	■	■	■	–
Counter	■	■	■	–
S0 signal	–	■	–	–
Switch LEDs	–	–	■	■
Output voltage for LED control	–	–	3,3 V	5 V

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX
Inputs

BE/S 10.20.3.2

Binary Input, Contact Scanning, Manual Operation, MDRC
Scans floating contacts with internally generated scanning voltage. The state of the input is displayed via yellow LEDs. The binary inputs enable detection of independent input signals. The devices feature a manual operation pushbutton for each channel. The devices are powered via the ABB i-bus® and do not require an additional power supply. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	2	BE/S 4.20.3.2	2CDG110276R0011		0.08	1
10-fold	4	BE/S 10.20.3.2	2CDG110277R0011		0.15	1
16-fold	6	BE/S 16.20.3.2	2CDG110278R0011		0.20	1

BE/S 16.230.3.2

Binary Input, 10 – 230 V, Manual Operation, MDRC
Detects AC/DC signals in the voltage range from 10...230 V. The state of the input is displayed via yellow LEDs. The binary inputs enable detection of independent input signals. The devices feature a manual operation pushbutton for each channel. The devices are powered via the ABB i-bus® and do not require an additional power supply. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	2	BE/S 4.230.3.2	2CDG110279R0011		0.08	1
8-fold	4	BE/S 8.230.3.2	2CDG110280R0011		0.14	1
10-fold	4	BE/S 10.230.3.2	2CDG110281R0011		0.14	1
12-fold	6	BE/S 12.230.3.2	2CDG110282R0011		0.20	1
16-fold	6	BE/S 16.230.3.2	2CDG110283R0011		0.20	1

US/U 2.3

Universal Interface, FM
The universal interface has 2 or 4 channels which can be parametrised as inputs or outputs with the ETS software. Conventional push-buttons, auxiliary contacts and LEDs can be connected.
The connecting cables can be extended up to 10 m. The contact scanning voltage and the supply voltage for the LEDs are made available by the device, the series resistors for the LEDs are integrated. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	–	US/U 2.3	2CDG110308R0011		0.08	1
4-fold	–	US/U 4.3	2CDG110309R0011		0.20	1

US/U 12.2

Universal Interface, FM

The universal interface has 12 channels which can be parametrised as inputs or outputs with the ETS software. Conventional push-buttons, auxiliary contacts, LEDs and the electronic relay ER/U can be connected. The connecting cables can be extended up to 10 m.
The contact scanning voltage and the supply voltage for the LEDs are made available by the device, the series resistors for the LEDs are integrated.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
12-fold	–	US/U 12.2	2CDG110065R0011		0.06	1

AE/S 4.1.1.3

AE/A 2.1

Analogue Input

Used wherever analogue variables should be detected. The sophisticated housing concept of the surface mounted device and the screw terminals of the DIN-Rail device enable quick and clear wiring and improve the speed of connection of the sensors.
Comprehensive range of adjustment for many typical sensors (1 – 10 V, 0(4) – 20 mA, 0 – 1 V, PT 100, PT 1000,...) for detection of temperature, brightness, fill levels, etc.
For active sensors the auxiliary voltage is supplied by AE/S 4.1.1.3;
in case of AE/A 2.1 a separate auxiliary voltage supply is required.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold, MDRC	4	AE/S 4.1.1.3	2CDG110190R0011		0.27	1
2-fold, SM	–	AE/A 2.1	2CDG110086R0011		0.30	1

ABB i-bus® KNX
Inputs

WZ/S 1.3.1.2

WES/A 4.1.1 with WB/Z 1.1.1

Weather Unit, MDRC and Weather Sensor, SM

It is used to detect and process weather data from weather sensor. It supplies data for twilight and brightness levels in 3 directions, rain, temperature, information on day/night, wind speed, date and time. An additional input for the connection of a PT 1000 sensor is provided. Four value memories which can store up to 24 values each are available. The Weather Unit WZ/S 1.3.1.2 can be operated either with the new Weather Sensor WES/A 4.1.1 or with the former sensors WES/A 3.1 or WES/A 2.1. The Weather Unit also provides the supply voltage for the connected sensor. The Weather Unit has to be supplied with a operating voltage of 85 to 265 V AC. The Weather Unit supports the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

The Weather Sensor WES/A 4.1.1 detects twilight, brightness in four directions (only three available in combination with WZ/S 1.3.1.2), rain, temperature, day/night, wind speed and the date and time using a GPS module. An additional heating transformer is not required. The new Weather Sensor WES/A 4.1.1 can not be connected to the former Weather Unit WZ/S 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Weather Unit	4	WZ/S 1.3.1.2	2CDG110184R0011		0.20	1
Weather Sensor Basic, SM	–	WES/A 4.1.1	2CDG120091R0011		0.16	1
Wall mounting for Weather Sensor Basic	–	WB/Z 1.1.1	2CDG120088R0011		0.12	1
Wall mounting for Weather Sensor, IP44	–	WB/Z 1.2.1	2CDG120093R0011		0.15	1
Mast Mounting Adapter for Weather Sensor	–	MA/Z 1.50.1	2CDG120094R0011		0.11	1

WS/S 4.1.1.2

Weather Station, 4-fold, MDRC

All common weather sensors for wind speed, wind direction, rain, amount of rain, brightness, light intensity, pyranometers, twilight, air pressure, humidity or temperature can be connected to the device. The power supply generates the 24 V DC voltage for external sensors (max. 300 mA). The device can be operated with 85 to 265 V AC, 50/60 Hz. The application software is configured for the detection of weather based data and enables quick sensor programming. The Weather Station supports the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	WS/S 4.1.1.2	2CDG110191R0011		0.27	1

Outputs
Switch to a smarter tomorrow

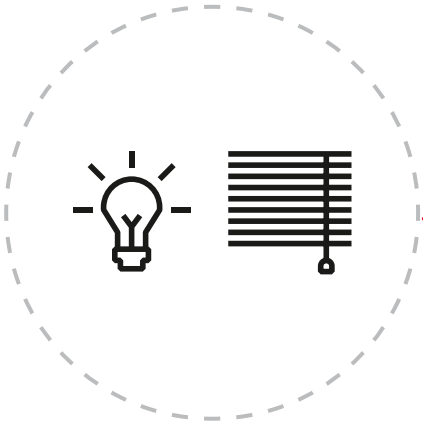

Combi Switch Actuators
The 9 Combi devices are combining two applications: switching and shading. The products are ideally made for residential usage to offer greatest flexibility.

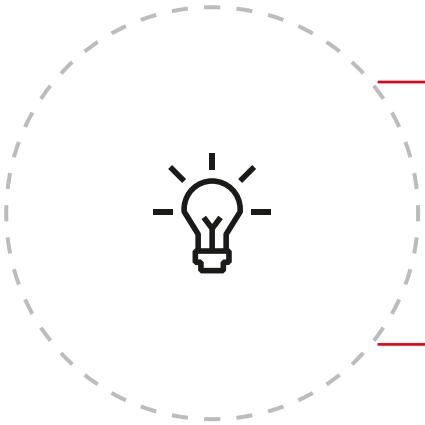

Standard Switch Actuators
These 12 devices are building the Standard when it comes to switching applications for commercial buildings. During the development we focused on providing a cost optimised selection of products, that matches the needs of commercial projects.

Professional Switch Actuators
The professional series includes 8 switch actuators made for high switching capacity. This portfolio has been developed to suit the high requirements of industry standards.

ABB i-bus® KNX

Outputs – Combi Switch Actuators

The following table provides an overview of the functions possible with the Switch Actuators and their application programs:

	SAH/S 8.6.7.1 SAH/S 16.6.7.1 SAH/S 24.6.7.1	**SAH/S 8.10.7.1 SAH/S 16.10.7.1 SAH/S 24.10.7.1**	**SAH/S 8.16.7.1 SAH/S 16.16.7.1 SAH/S 24.16.7.1**
Range	Combi	Combi	Combi
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail
Number of outputs (Switch [Blind])	8 [4]/16 [8]/24 [12]	8 [4]/16 [8]/24 [12]	8 [4]/16 [8]/24 [12]
Module width (space unit)	4/8/12	4/8/12	4/8/12
Manual operation	■	■	■
Switching position indication	■	■	■
I_n rated current (A)	6 A	10 A	16 A
Current measurement	–	–	–
Switch function			
– Central On/Off	■	■	■
– Staircase lighting	■	■	■
– Staircase lighting advance warning	■	■	■
– Change staircase lighting time via group object	■	■	■
– Flashing	■	■	■
– Selection of N.O./N.C. contact	■	■	■
– Switching on/off delay	■	■	■
Energy Function	–	–	–
Load control integration	■	■	■
Priority objects/forced operation/blocking	■	■	■
Function Scene	■	■	■
Blind/shutter function			
– Central up/down/position/stop	■	■	■
– Blind/shutter control	■	■	■
– Wind/Rain/Frost alarm	■	■	■
– Automatic sun protection	■	■	■
– Parameterizable reversing time	■	■	■
– Reference movement	■	■	■
– Travel range limitation	■	■	■
– Adjustable delay time for drives	■	■	■
Function Logic (independet of output)			
– Logic AND function	■	■	■
– Logic OR function	■	■	■
– Logic exclusive OR function	■	■	■
– Gate function	■	■	■
– 1 bit Inverter	■	■	■
Function Threshold (independent of output)	■	■	■
Additional functions			
– Request status values	■	■	■
– Template parameter windows	■	■	■
– Reaction on bus voltage failure/recovery	■	■	■
– Advanced status group objects	■	■	■
– Support i-bus® Tool	■	■	■

■ = Function is supported

– = Function is not supported

The following table provides and overview of the rated values, switching performance, lamp loads or the number of lamps, which can be connected to a contact:

	SAH/S 8.6.7.1 SAH/S 16.6.7.1 SAH/S 24.6.7.1	**SAH/S 8.10.7.1 SAH/S 16.10.7.1 SAH/S 24.10.7.1**	**SAH/S 8.16.7.1 SAH/S 16.16.7.1 SAH/S 24.16.7.1**
Range	Combi	Combi	Combi
I_n rated current (A) [2]	6 A	10 A [3]	16 A [3]
U_n rated voltage (V)	230 V AC	230 V AC	230 V AC
AC1 operation (cos ϕ = 0.8) acc. to EN 60947-4-1	6 A	10 A	16 A
AC3 operation (cos ϕ = 0.45) acc. to EN 60947-4-1	6 A	6 A	6 A
C-Load switching capacity (200 µF)	–	–	–
Fluorescent lighting load AX acc. to EN 60669-1	6 AX (140 µF) [2]	10 AX (140 µF) [2]	10 AX (140 µF) [2]
Minimum switching capacity	100 mA/12 V	100 mA/12 V	100 mA/12 V
DC current switching capacity (resistive load)	6 A/24 V =	6 A/24 V =	6 A/24 V =
Mechanical service life	> 10^6	> 10^6	> 10^6
Electronic endurance to IEC 60947-4-1:			
– Rated current AC1 (240 V/cos ϕ = 0.8)	100,000	100,000	100,000
– Rated current AC3 (240 V/cos ϕ = 0.45)	6,000	6,000	6,000
Incandescent lamp load at 230 V AC	1,200 W	1,200 W	1,200 W
Fluorescent lamp T5/T8:			
– Uncorrected	800 W	800 W	800 W
Low-voltage halogen lamps:			
– Inductive transformer	800 W	800 W	800 W
– Electronic transformer	1,000 W	1,000 W	1,000 W
Halogen lamp 230 V	1,000 W	1,000 W	1,000 W
Mercury-vapour lamps:			
– Uncorrected	1,000 W	1,000 W	1,000 W
– Parallel compensated	800 W	800 W	800 W
LED lamps/energy-saving lamps	250 W	250 W	250 W
Rated motor power	1,380 W	1,380 W	1,380 W
Max. peak inrush-current Ip (150 µs)	200 A	200 A	200 A
Max. peak inrush-current Ip (250 µs)	160 A	160 A	160 A
Max. peak inrush-current Ip (600 µs)	100 A	100 A	100 A
Number of ballasts (T5/T8, single element): [1]			
18 W (ABB ballasts 1 x 18 SF)	10 ballasts	10 ballasts	10 ballasts
24 W (ABB ballasts 1 x 24 CY)	10 ballasts	10 ballasts	10 ballasts
36 W (ABB ballasts 1 x 36 CF)	7 ballasts	7 ballasts	7 ballasts
58 W (ABB ballasts 1 x 58 CF)	5 ballasts	5 ballasts	5 ballasts
80 W (Helvar EL 1 x 80 SC)	3 ballasts	3 ballasts	3 ballasts

—

1) = For multiple element lamps or other types, the number of electronic ballasts must be determined using the peak inrush-current of the electronic ballasts.

2) = The maximum peak inrush-current may not be exceeded.

3) = Max. load current per device: 8-fold = 100 A, 16-fold = 160 A, 24-fold = 200 A

ABB i-bus® KNX

Outputs – Standard Switch Actuators

The following table provides an overview of the functions possible with the Switch Actuators and their application programs:

	SA/S 2.6.2.2 **SA/S 4.6.2.2** **SA/S 8.6.2.2** **SA/S 12.6.2.2**	**SA/S 2.10.2.2** **SA/S 4.10.2.2** **SA/S 8.10.2.2** **SA/S 12.10.2.2**	**SA/S 2.16.2.2** **SA/S 4.16.2.2** **SA/S 8.16.2.2** **SA/S 12.16.2.2**
Range	Standard	Standard	Standard
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail
Number of outputs	2/4/8/12	2/4/8/12	2/4/8/12
Module width (space unit)	2/4/8/12	2/4/8/12	2/4/8/12
Manual operation	■	■	■
Switching position indication	■	■	■
I_n rated current (A)	6 A	10 A	16 A
Current measurement	–	–	–
Switch function			
– Central On/Off	■	■	■
– Staircase lighting	■	■	■
– Staircase lighting advance warning	■	■	■
– Change staircase lighting time via group object	■	■	■
– Flashing	■	■	■
– Selection of N.O./N.C. contact	■	■	■
– Switching on/off delay	■	■	■
Energy Function	–	–	–
Load control integration	■	■	■
Priority objects/forced operation/blocking	■	■	■
Function Scene	■	■	■
Blind/shutter function	–	–	–
Function Logic (independet of output)			
– Logic AND function	■	■	■
– Logic OR function	■	■	■
– Logic exclusive OR function	■	■	■
– Gate function	■	■	■
– 1 bit Inverter	■	■	■
Function Threshold (independent of output)	■	■	■
Additional functions			
– Request status values	■	■	■
– Template parameter windows	■	■	■
– Reaction on bus voltage failure/recovery	■	■	■
– Advanced status group objects	■	■	■
– Support i-bus® Tool	■	■	■

■ = Function is supported

– = Function is not supported

The following table provides and overview of the rated values, switching performance, lamp loads or the number of lamps, which can be connected to a contact:

	SA/S 2.6.2.2 **SA/S 4.6.2.2** **SA/S 8.6.2.2** **SA/S 12.6.2.2**	**SA/S 2.10.2.2** **SA/S 4.10.2.2** **SA/S 8.10.2.2** **SA/S 12.10.2.2**	**SA/S 2.16.2.2** **SA/S 4.16.2.2** **SA/S 8.16.2.2** **SA/S 12.16.2.2**
Range	Standard	Standard	Standard
I_n rated current (A) [2]	6 A	10 A	16 A
U_n rated voltage (V)	230 V AC	230 V AC	230 V AC
AC1 operation (cos ϕ = 0.8) acc. to EN 60947-4-1	6 A	10 A	16 A
AC3 operation (cos ϕ = 0.45) acc. to EN 60947-4-1	6 A	8 A	8 A
C-Load switching capacity (200 µF)	–	–	–
Fluorescent lighting load AX acc. to EN 60669-1	6 AX (140 µF) [2]	10 AX (140 µF) [2]	16 A (140 µF) [2]
Minimum switching capacity	100 mA/12 V	100 mA/12 V	100 mA/12 V
DC current switching capacity (resistive load)	6 A/24 V =	10 A/24 V =	16 A/24 V =
Mechanical service life	> 3 x 10^6	> 3 x 10^6	> 3 x 10^6
Electronic endurance acc. to IEC 60947-4-1:			
– Rated current AC1 (240 V/cos ϕ = 0.8)	100,000	100,000	100,000
– Rated current AC3 (240 V/cos ϕ = 0.45)	30,000	30,000	30,000
– Rated current AC5a (240 V/cos ϕ = 0.45)	30,000	30,000	30,000
Incandescent lamp load at 230 V AC	1,380 W	2,300 W	2,500 W
Fluorescent lamp T5/T8:			
– Uncorrected	1,380 W	2,300 W	2,500 W
– Parallel compensated	1,380 W	1,500 W	1,500 W
– DUO circuit	1,380 W	1,500 W	1,500 W
Low-voltage halogen lamps:			
– Inductive transformer	1,200 W	1,200 W	1,200 W
– Electronic transformer	1,380 W	1,500 W	1,500 W
Halogen lamp 230 V	1,380 W	2,300 W	2,500 W
Dulux lamps:			
– Uncorrected	1,100 W	1,100 W	1,100 W
– Parallel compensated	1,100 W	1,100 W	1,100 W
Mercury-vapour lamps:			
– Uncorrected	1,380 W	2,000 W	2,000 W
– Parallel compensated	1,380 W	2,000 W	2,000 W
LED lamps/energy-saving lamps	400 W	400 W	400 W
Rated motor power	1,380 W	1,840 W	1,840 W
Max. peak inrush current Ip (150 µs)	400 A	400 A	400 A
Max. peak inrush current Ip (250 µs)	320 A	320 A	320 A
Max. peak inrush current Ip (600 µs)	200 A	200 A	200 A
Number of ballasts (T5/T8, single element): [1]			
18 W (ABB ballasts 1 x 18 SF)	23 ballasts	23 ballasts	23 ballasts
24 W (ABB ballasts 1 x 24 CY)	23 ballasts	23 ballasts	23 ballasts
36 W (ABB ballasts 1 x 36 CF)	14 ballasts	14 ballasts	14 ballasts
58 W (ABB ballasts 1 x 58 CF)	11 ballasts	11 ballasts	11 ballasts
80 W (Helvar EL 1 x 80 SC)	10 ballasts	10 ballasts	10 ballasts

—

1) = For multiple element lamps or other types, the number of electronic ballasts must be determined using the peak inrush-current of the electronic ballasts.

2) = The maximum peak inrush-current may not be exceeded.

ABB i-bus® KNX

Outputs – Professional Switch Actuators

The following table provides an overview of the functions possible with the Switch Actuators and their application programs:

	SA/S 2.16.5.2 **SA/S 4.16.5.2** **SA/S 8.16.5.2** **SA/S 12.16.5.2**	**SA/S 2.16.6.2** **SA/S 4.16.6.2** **SA/S 8.16.6.2** **SA/S 12.16.6.2**
Range	Professional	Professional with Energy Function
Type of installation	DIN-Rail	DIN-Rail
Number of outputs	2/4/8/12	2/4/8/12
Module width (space unit)	2/4/8/12	2/4/8/12
Manual operation	■	■
Switching position indication	■	■
I_n rated current (A)	16/20 A C-Load	16/20 A C-Load
Current measurement	–	■
Switch function		
– Central On/Off	■	■
– Staircase lighting	■	■
– Staircase lighting advance warning	■	■
– Change staircase lighting time via group object	■	■
– Flashing	■	■
– Selection of N.O./N.C. contact	■	■
– Switching on/off delay	■	■
Energy Function	–	■
– Current measurement	–	■
– Power calculation	–	■
– Energy consumption calculation	–	■
– Load monitoring	–	■
Load control integration	■	■
Priority objects/forced operation/blocking	■	■
Function Scene	■	■
Blind/shutter function	–	–
Function Logic (independet of output)		
– Logic AND function	■	■
– Logic OR function	■	■
– Logic exclusive OR function	■	■
– Gate function	■	■
– 1 bit Inverter	■	■
Function Threshold (independent of output)	■	■
Additional functions		
– Request status values	■	■
– Template parameter windows	■	■
– Reaction on bus voltage failure/recovery	■	■
– Advanced status group objects	■	■
– Support i-bus® Tool	■	■

■ = Function is supported

– = Function is not supported

The following table provides and overview of the rated values, switching performance, lamp loads or the number of lamps, which can be connected to a contact:

	SA/S 2.16.5.2 **SA/S 4.16.5.2** **SA/S 8.16.5.2** **SA/S 12.16.5.2**	**SA/S 2.16.6.2** **SA/S 4.16.6.2** **SA/S 8.16.6.2** **SA/S 12.16.6.2**
Range	Professional	Professional with Energy Function
I_n rated current (A) [3]	16/20 A C-Load	16/20 A C-Load
U_n rated voltage (V)	230 V AC	230 V AC
AC1 operation (cos ϕ = 0.8) acc. to EN 60947-4-1	20 A	20 A
AC3 operation (cos ϕ = 0.45) acc. to EN 60947-4-1	16 A	16 A
C-Load switching capacity (200 µF)	20 A	20 A
Fluorescent lighting load AX acc. to EN 60669-1	20 AX (200 µF) [3]	20 AX (200 µF) [3]
Minimum switching capacity	100 mA/12 V	100 mA/12 V
DC current switching capacity (resistive load)	20 A/24 V =	20 A/24 V =
Mechanical service life	> 10^6	> 10^6
Electronic endurance acc. to IEC 60947-4-1:		
– Rated current AC1 (240 V/cos ϕ = 0.8)	100,000	100,000
– Rated current AC3 (240 V/cos ϕ = 0.45)	30,000	30,000
– Rated current AC5a (240 V/cos ϕ = 0.45)	30,000	30,000
Incandescent lamp load at 230 V AC	3,680 W	3,680 W
Fluorescent lamp T5/T8:		
– Uncorrected	3,680 W	3,680 W
– Parallel compensated	2,500 W	2,500 W
– DUO circuit	3,680 W	3,680 W
Low-voltage halogen lamps:		
– Inductive transformer	2,000 W	2,000 W
– Electronic transformer	2,500 W	2,500 W
Halogen lamp 230 V	3,680 W	3,680 W
Dulux lamps:		
– Uncorrected	3,680 W	3,680 W
– Parallel compensated	3,000 W	3,000 W
Mercury-vapour lamps:		
– Uncorrected	3,680 W	3,680 W
– Parallel compensated	3,000 W	3,000 W
LED lamps/energy-saving lamps	650 W	650 W
Rated motor power	3,680 W	3,680 W
Max. peak inrush current Ip (150 µs)	600 A	600 A
Max. peak inrush current Ip (250 µs)	480 A	480 A
Max. peak inrush current Ip (600 µs)	300 A	300 A
Number of ballasts (T5/T8, single element): [2]		
18 W (ABB ballasts 1 x 18 SF)	26[1] ballasts	26[1] ballasts
24 W (ABB ballasts 1 x 24 CY)	26[1] ballasts	26[1] ballasts
36 W (ABB ballasts 1 x 36 CF)	22 ballasts	22 ballasts
58 W (ABB ballasts 1 x 58 CF)	12[1] ballasts	12[1] ballasts
80 W (Helvar EL 1 x 80 SC)	12[1] ballasts	12[1] ballasts

—

1) = The number of ballasts is limited by the protection with B16/B20 circuit-breakers.

2) = For multiple element lamps or other types, the number of electronic ballasts must be determined using the peak inrush-current of the electronic ballasts.

3) = The maximum peak inrush-current may not be exceeded.

ABB i-bus® KNX

Outputs – Combi Switch Actuators

SAH/S 8.6.7.1

Switch/Shutter Actuator, 6 A, MDRC

The compact 6 A combi switch actuator has 8, 16 or 24 independent switching relays. The outputs can be used individually via ABB i-bus® KNX for switching electrical loads or in pairs for controlling 230 V AC roller shutter or blind drives (no electromechanically interlocking). The device features a manual operation, which can also be disabled. Via the manual operation the outputs can be operated manually and the switching or driving status is displayed. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
8-fold	4	SAH/S 8.6.7.1	2CDG110244R0011		0.35	1
16-fold	8	SAH/S 16.6.7.1	2CDG110245R0011		0.60	1
24-fold	12	SAH/S 24.6.7.1	2CDG110246R0011		0.83	1

SAH/S 16.10.7.1

Switch/Shutter Actuator, 10 A, MDRC

The compact 10 A combi switch actuator has 8, 16 or 24 independent switching relays. The outputs can be used individually via ABB i-bus® KNX for switching electrical loads or in pairs for controlling 230 V AC roller shutter or blind drives (no electromechanically interlocking). The device features a manual operation, which can also be disabled. Via the manual operation the outputs can be operated manually and the switching or driving status is displayed. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
8-fold	4	SAH/S 8.10.7.1	2CDG110247R0011		0.35	1
16-fold	8	SAH/S 16.10.7.1	2CDG110248R0011		0.60	1
24-fold	12	SAH/S 24.10.7.1	2CDG110249R0011		0.83	1

SAH/S 24.16.7.1

Switch/Shutter Actuator, 16 A, MDRC

The compact 16 A combi switch actuator has 8, 16 or 24 independent switching relays. The outputs can be used individually via ABB i-bus® KNX for switching electrical loads or in pairs for controlling 230 V AC roller shutter or blind drives (no electromechanically interlocking). The device features a manual operation, which can also be disabled. Via the manual operation the outputs can be operated manually and the switching or driving status is displayed. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
8-fold	4	SAH/S 8.16.7.1	2CDG110250R0011		0.35	1
16-fold	8	SAH/S 16.16.7.1	2CDG110251R0011		0.60	1
24-fold	12	SAH/S 24.16.7.1	2CDG110252R0011		0.83	1

ABB i-bus® KNX

Outputs – Standard Switch Actuators

SA/S 2.6.2.2

Switch Actuator, 6 A, MDRC

The switch actuator uses potential free contacts to switch 2, 4, 8 or 12 independent electrical loads via the ABB i-bus® KNX. The device features a manual operation and displaying of the switching state of the outputs. The 6 A device is especially suited to switch resistive, inductive or capacitive loads. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
2-fold	2	SA/S 2.6.2.2	2CDG110253R0011		0.20	1
4-fold	4	SA/S 4.6.2.2	2CDG110254R0011		0.29	1
8-fold	8	SA/S 8.6.2.2	2CDG110255R0011		0.50	1
12-fold	12	SA/S 12.6.2.2	2CDG110256R0011		0.72	1

SA/S 8.10.2.2

Switch Actuator, 10 A, MDRC

The switch actuator uses potential free contacts to switch 2, 4, 8 or 12 independent electrical loads via the ABB i-bus® KNX. The device features a manual operation and displaying of the switching state of the outputs. The 10 A device is especially suited for loads with high surge currents e.g. flourescent lighting (AX) acc. EN 60669. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
2-fold	2	SA/S 2.10.2.2	2CDG110257R0011		0.20	1
4-fold	4	SA/S 4.10.2.2	2CDG110258R0011		0.29	1
8-fold	8	SA/S 8.10.2.2	2CDG110259R0011		0.50	1
12-fold	12	SA/S 12.10.2.2	2CDG110260R0011		0.72	1

SA/S 12.16.2.2

Switch Actuator, 16 A, MDRC

The switch actuator uses potential free contacts to switch 2, 4, 8 or 12 independent electrical loads via the ABB i-bus® KNX. The device features a manual operation and displaying of the switching state of the outputs. The 16 A device is especially suited for loads with high surge currents e.g. flourescent lighting (AX) acc. EN 60669. The device is powered by KNX and requires no additional power supply. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
2-fold	2	SA/S 2.16.2.2	2CDG110261R0011		0.20	1
4-fold	4	SA/S 4.16.2.2	2CDG110262R0011		0.29	1
8-fold	8	SA/S 8.16.2.2	2CDG110263R0011		0.50	1
12-fold	12	SA/S 12.16.2.2	2CDG110264R0011		0.72	1

ABB i-bus® KNX

Outputs – Professional Switch Actuators

SA/S 4.16.5.2

Switch Actuator, 16 A, C-Load, MDRC

The switch actuator uses potential free contacts to switch 2, 4, 8 or 12 independent electrical loads via the ABB i-bus® KNX. The device features a manual operation and displaying of the switching state of the outputs. The 16/20 A, 16 A-AC3 (C-load) device is especially suited for loads with high surge currents e.g. flourescent lighting (AX) acc. EN 60669. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	2	SA/S 2.16.5.2	2CDG110265R0011		0.21	1
4-fold	4	SA/S 4.16.5.2	2CDG110266R0011		0.31	1
8-fold	8	SA/S 8.16.5.2	2CDG110267R0011		0.55	1
12-fold	12	SA/S 12.16.5.2	2CDG110268R0011		0.79	1

SA/S 12.16.6.2

Switch Actuator, 16 A, C-Load with Energy Function, MDRC

The switch actuator uses potential free contacts to switch 2, 4, 8 or 12 independent electrical loads via ABB i-bus® KNX. The device has integrated energy functions. This includes independent load current measurement in each output and easy to use calculation of power and energy consumption for each output or groups of outputs. Via an integrated load shedding object an integration in a load control system can be easily realized. The device features a manual operation and displaying of the switching state of the outputs. The 16/20 A, 16 A-AC3 (C-load) device is especially suited for loads with high surge currents e.g. LED or fluorescent lighting (AX) acc. EN 60669. Devices support the ABB i-bus® Tool for advanced diagnostics and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	2	SA/S 2.16.6.2	2CDG110269R0011		0.24	1
4-fold	4	SA/S 4.16.6.2	2CDG110270R0011		0.37	1
8-fold	8	SA/S 8.16.6.2	2CDG110271R0011		0.66	1
12-fold	12	SA/S 12.16.6.2	2CDG110272R0011		0.96	1

ABB i-bus® KNX
Outputs

SA/U 1.16.2

Switch Actuator, 1-fold, 16 A, FM

For switching 230 V~ consumers. Equipped with three extension inputs which depending on parameterization can act directly on the switching output or alternatively as binary inputs on the KNX bus. One Normally open contact, potential free. Rated voltage: 230 V~, +10 %/ –10 %, 50 Hz. Max. switching current: 16 A; switching capacity: up to 2.500 W depending on the consumer. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SA/U 1.16.2	2CKA006151A0280		0.11	1

SAH/U 2.16.2

Switch/Shutter Actuator, 2/1-fold, FM

For controlling blind or awning motors or for switching two 230 V~ consumers. With 3 inputs and 1 change-over output – normally open contact, potential-bound –. Rated voltage: 230 V~, +10 %/–10 %, 50 Hz. Input polling voltage: 5 V. Output switching current per device: ∑ 16 A, switching capacity: up to 2.500 W depending on the consumer. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SAH/U 2.16.2	2CKA006152A0042		0.11	1

IO/S 4.6.1.1

I/O Actuator, 6 A, MDRC

For the control of loads in residential areas, typically in hotel rooms and apartments.
The I/O Actuators provide binary inputs for the connection of conventional push-buttons and outputs for switching loads. Inputs and outputs can be internally connected by ETS.
By integrating the devices into KNX networks further functions can be realised: e.g. central control or room based emergency calls to a control centre.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	4	IO/S 4.6.1.1	2CDG110168R0011		0.17	1
8-fold	8	IO/S 8.6.1.1	2CDG110169R0011		0.30	1

ABB i-bus® KNX
Outputs

AA/S 4.1.2

AA/A 2.1.2

Analogue Actuator
The Analogue Actuator converts KNX telegrams in voltage (0...10 V) or current (0(4)...20 mA) signals. These analogue output signals are used to influence regulatory processes.
For example, devices for heating, air conditioning or ventilation applications can be adjusted in their operation depending on the information, which are transmitted via the bus system. This Analogue Actuator is available in a 4-fold DIN rail version and a 2-fold device with surface mounting housing. The AA/A only provides an analog voltage signal and requires the KNX as only supply voltage. The ABB i-bus® Tool is supported for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold, MDRC	4	AA/S 4.1.2	2CDG110202R0011		0.19	1
2-fold, SM	–	AA/A 2.1.2	2CDG110203R0011		0.30	1

ABB i-bus® KNX
Shading Control

Modern building installation enables a high degree of functionality and simultaneously complies with increased security requirements.

Modern sun protection devices have a significant role in building automation:
- Anti-glare protection (e.g. PC workstations)
- Utilization of daylight by tracking the sun‘s position and directing available daylight
- Protecting furniture and carpets from fading
- Regulating the room temperature (overheating protection in summer; harvesting the available energy on cold days)
- Providing protection from people looking in from the outside
- Protection against intruders.

With the Blind/Roller Shutter Actuators (JRA/S), the complex requirements on a sustainable and energy efficient automatic sun protection control can be implemented in offices, residential and functional buildings via ABB i-bus® KNX.

The Blind/Roller Shutter Actuators are ideal for the control of drives in the area of sun protection:
- Blinds, exterior blinds, slat blinds and panel curtains
- Roller shutters, roller blinds, screens, vertical blinds
- Awnings, pleated blinds, pleated curtains, etc.

Optimum room air quality via automatic ventilation
The demands for the reduction of energy consumption often results in poor ventilation in today‘s heavily insulated buildings. The quality of the room air does not comply with the desired and required level.
Natural ventilation is often an effective and efficient method for exchanging the “used” room air and improving the air quality in the room. If the air quality in the room is monitored with sensors (temperature, humidity, CO_2 concentration), the ventilation flaps can be opened automatically and in good time ensuring that the air quality is kept in a comfortable range.

Blind/Roller Shutter Actuators are ideal for control of ventilation elements such as
- Ventilation flaps
- Roof hatches, skylights
- Windows, doors and gates

Automatic travel detection
Travel times for the connected drives can be easily determined during operation with the automatic travel detection feature. It saves time during setup. Furthermore, compensation of age and weather-related length changes to blinds or roller shutters is assured. It facilitates precise positioning of the blinds/shutter when using sun position-dependent control.

Template functionaity
This function allows parameter settings of an output to be copied or exchanged with other freely selectable outputs. Templates are useful particularly on projects, where all drives of a facade are controlled identically.
It shortens the setup process and reduces the possible sources of error with parameterization.

Integration in the room temperature control
The intelligent and networked blind and roller shutter control plays an important role in the energy efficient usage of a building. The level of sunlight in the room and heating up due to the sun‘s energy can be controlled in conjunction with the room climate control. The software function “overheat control” prevents unintentional overheating of a room. The blinds are closed in good time. The shutter control can be actively involved in the room temperature control.

ABB i-bus® KNX
Shading Control

	Standard						SMI	
	JRA/S x.230.2.2	**JRA/S x.230.5.2**	**JRA/S x.230.4.2**	**JRA/S 4.230.7.2**	**JRA/S x.24.2.2**	**JRA/S 4.24.5.2**	**SJR/S 4.24.2.1**	**JA/S 4.SMI.1M**
General								
Supply voltage	KNX	KNX	KNX	KNX	KNX	KNX	KNX	KNX
Nominal voltage	230 V AC	230 V AC	230 V AC	230 V AC	24 V DC	24 V DC	24 V DC	230 V AC
Auxiliary voltage	–	–	–	–	–	–	230 V AC	230 V AC
Type of installation	MDRC	MDRC	MDRC	MDRC	MDRC	MDRC	MDRC	MDRC
Number of Outputs	2, 4, 8, 12	2, 4, 8, 12	4, 8	4	2, 4, 8	4	4x 4 SMI LoVo (broadcast)	4x 4 SMI (broadcast)
Nominal current relays	6 A	6 A	6 A	6 A	6 A	6 A	–	–
Relays type	bistable	bistable	bistable	bistable	bistable	bistable	–	–
Nominal power motor	1.380 W	1.380 W	1.380 W	1.380 W	144 W	144 W	–	–
Number of Inputs (Contact Scanning)	–	–	8, 16	8	–	–	–	–
Module width (space unit)	4, 4, 8, 12	4, 4, 8, 12	6, 12	8	4, 4, 8	4	4	4
Manual Operation	■	■	–	■	■	■	■	■
Functions (Device)								
Motor control								
Blinds	■	■	■	■	■	■	■	■
Shutters	■	■	■	■	■	■	■	■
Ventilation flap	■	■	■	■	■	■	–	–
Travel detection	–	■	■	■	–	■	–	–
Delay on turn of direction	■	■	■	■	■	■	–	–
Run time delay & minimum run time	■	■	■	■	■	■	■	■
Swap direction of rotation	■	■	■	■	■	■	–	–
Dead times	■	■	■	■	■	■	–	–
Reference movement	■	■	■	■	■	■	–	–
Calibration movement	–	■	■	■	–	■	–	–
Support of motors with two lower end positions	–	–	–	■	–	–	–	–
Safety								
Weather alarms & central securities	■	■	■	■	■	■	■	■
Forced operation	■	■	■	■	■	■	■	■
Individual securities	■	■	■	■	■	■	–	–
Automatic sun protection								
Block direct or automatic commands	■	■	■	■	■	■	■	■
Glare protection	■	■	■	■	■	■	■	■
Heating/Cooling	■	■	■	■	■	■	■	■
Overheat protection	■	■	■	■	■	■	–	–
Call up & save KNX scenes	■	■	■	■	■	■	■	■
SMI	–	–	–	–	–	–	■	■
Special functions								
KNX Data Secure	■	■	■	■	■	■	–	–
Sector control	■	■	■	■	■	■	–	–
Working position	■	■	■	■	■	■	–	–
Logic & Threshold	■	■	■	■	■	■	–	–
Transmission and switching delay	■	■	■	■	■	■	–	–
Reaction after KNX voltage failure/recovery	■	■	■	■	■	■	■	■
Status messages	■	■	■	■	■	■	■	■
i–bus®-Tool	■	■	■	■	■	■	–	–

■ = Function is supported

– = Function is not supported

JRA/S 2.230.2.2

Blind/Shutter Actuator, 230 V AC, manual operation, MDRC

For the control of independent 230 V AC motors via ABB i-bus® KNX. The devices are designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. To protect the motor, the output contacts are electromechanically locked against each other. Push buttons are located at the front of the device to control the outputs e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	4	JRA/S 2.230.2.2	2CDG110284R0011		0.16	1
4-fold	4	JRA/S 4.230.2.2	2CDG110285R0011		0.20	1
8-fold	8	JRA/S 8.230.2.2	2CDG110286R0011		0.38	1
12-fold	12	JRA/S 12.230.2.2	2CDG110287R0011		0.54	1

JRA/S 8.230.5.2

Blind/Shutter Actuator with travel detection, 230 V AC, manual operation, MDRC

For the control of independent 230 V AC motors via ABB i-bus® KNX. The devices are designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. The travel times of the motor are detected automatically via current detection. To protect the motor, the output contacts are electromechanically locked against each other. Push buttons are located at the front of the device to control the outputs e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	4	JRA/S 2.230.5.2	2CDG110288R0011		0.17	1
4-fold	4	JRA/S 4.230.5.2	2CDG110289R0011		0.22	1
8-fold	8	JRA/S 8.230.5.2	2CDG110290R0011		0.40	1
12-fold	12	JRA/S 12.230.5.2	2CDG110291R0011		0.59	1

JRA/S 4.230.4.2

Blind/Shutter Actuator with travel detection and binary inputs, 230 V AC, MDRC

For the control of independent 230 V AC motors via ABB i-bus® KNX. The devices are designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. The travel times of the motor are detected automatically via current detection. Additionally the device has 2 binary inputs (contact scanning) per output, for the connection of conventional switches or push buttons to directly control the hanging. The device is pre-configured so that the respective inputs are directly assigned to the outputs. To protect the motor, the output contacts are electromechanically locked against each other.
The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	6	JRA/S 4.230.4.2	2CDG110292R0011		0.28	1
8-fold	12	JRA/S 8.230.4.2	2CDG110293R0011		0.38	1

ABB i-bus® KNX
Shading Control

JRA/S 4.230.7.2

Blind/Shutter Actuator with 3 limit switch, travel detection and binary inputs, 4-fold, 230 V AC, manual operation, MDRC

For the control of independent 230 V AC motors via ABB i-bus® KNX. The devices are designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. The device can be used for blinds with working position/3-end-position-switches and features an additional down contact to control the respective motors. The travel times of the motor are detected automatically via current detection. Additionally the device has 2 binary inputs (contact scanning) per output, for the connection of conventional switches or push buttons to directly control the hanging. The device is pre-configured so that the respective inputs are directly assigned to the outputs. To protect the motor, the output contacts are electromechanically locked against each other. Push buttons are located at the front of the device to control the outputs e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The device supports KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	8	JRA/S 4.230.7.2	2CDG110294R0011		0.53	1

JRA/S 2.24.2.2

Blind/Shutter Actuator, 24 V DC, manual operation, MDRC

For the control of independent 24 V DC motors via ABB i-bus® KNX. The device is designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. Push buttons are located at the front of the device to control the outputs e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	4	JRA/S 2.24.2.2	2CDG110295R0011		0.15	1
4-fold	4	JRA/S 4.24.2.2	2CDG110296R0011		0.21	1
8-fold	8	JRA/S 8.24.2.2	2CDG110297R0011		0.38	1

JRA/S 4.24.5.2

Blind/Shutter Actuator with travel detection, 4-fold, 24 V DC, manual operation, MDRC

For the control of up to 4 independent 24 V DC motors via ABB i-bus® KNX. The device is designed for positioning blinds, roller shutters, awnings and other shading products as well as for controlling doors, windows and ventilation flaps. Additional auxiliary voltage is not needed. The travel times of the motor are detected automatically via current detection. Push buttons are located at the front of the device to control the outputs e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The device supports KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	4	JRA/S 4.24.5.2	2CDG110298R0011		0.21	1

JA/S 4.SMI.1M

SMI Shutter Actuator, 4-fold, Manual Operation, MDRC

It controls four independent groups (broadcast) with up to four SMI (Standard Motor Interface) drives (230 V) for positioning blinds, roller shutters, awnings and other shading products. Status signals (motor fault, direction of movement) can also be sent from the SMI drive on the bus. Push buttons are located at the front of the device to control the outputs e.g. during commissioning. The current status of the output is displayed via LEDs.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	JA/S 4.SMI.1M	2CDG110028R0011		0.25	1

SJR/S 4.24.2.1

SMI Blind/Roller Shutter Actuator, LoVo, 4-fold, MDRC

It controls four independent groups (broadcast) with up to four SMI (Standard Motor Interface) LoVo drives for positioning blinds, roller shutters, awnings and other shading products. Status signals (motor fault, direction of movement) can also be sent from the SMI drive on the bus. Push buttons are located at the front of the device to control the outputs e.g. during commissioning. The current status of the output is displayed via LEDs.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SJR/S 4.24.2.1	2CDG110143R0011		0.25	1

JSB/S 1.1

Shutter Control Unit, MDRC

Controls shutter and blind actuators according to the position of the sun. The shutter control unit contains the functions of anti-glare protection and daylight redirection for up to 4 facades. Automatic shading can be implemented for every building and climatic control can be supported by the comprehensive range of parameter settings in the ETS.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	JSB/S 1.1	GHQ6310084R0111		0.12	1

Lighting Control
ABB i-bus® KNX DALI Gateways

Impressive lighting atmosphere, thanks to the DALI Gateways DG/S 1.64.5.1 and DG/S 2.64.5.1

A DALI Gateway serves as the interface between the KNX installation in the building and the digital DALI lighting control system, and therefore unites the two most important building automation standards.

ABBs DALI Gateway Premium devices enable maximum functionality and flexibility in lighting design thanks to the tunable white and color control function.

ABB i-bus® KNX

Lighting Control – DALI

The ABB DALI Gateways are used to interface between DALI (Digital Addressable Lighting Interface) and KNX installations. Four Gateways are available:
The basic versions DG/S 1.64.1.1 DALI Gateway (1-fold) and DG/S 2.64.1.1 DALI Gateway (2-fold) and on the other hand the premium versions DG/S 1.64.5.1 DALI Gateway (1-fold) and DG/S 2.64.5.1 DALI Gateway (2-fold). All incorporate the DALI power supply.

Both, basic and premium Gateways are certificated as Single-Master DALI-2 controller and supports DT1 self-contained emergency ligthing acc. EN 62386-202.
The DALI Gateways Premium supports DT8 color control acc. EN 62386-209. Other DALI data points like DT6 can controlled via standard DALI commands acc. EN 62386-102.

DALI Gateways DG/S 1.64.x.1
Flexibility by controlling light individually per device or in groups

The DG/S 1.64.1.1 DALI Gateway Basic (1-fold) or DG/S 1.64.5.1 DALI Gateway Premium (1-fold) can install up to 64 DALI devices both via 16 flexible DALI (orange lined group) and KNX lighting groups (green dotted lined group), each with one or more DALI participants. Control and Monitoring via KNX. Control and status feedback can also be carried out via Broadcast. 16 independent Lighting scenes are available.

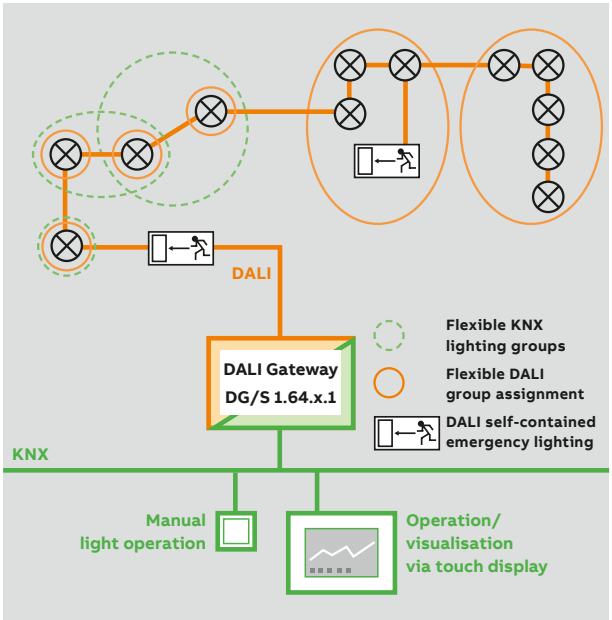

DALI Gateways DG/S 2.64.x.1
Maximum flexibility combined with highest amount of DALI participants and groups, to meet all customer needs

The DG/S 2.64.1.1 DALI Gateway Basic (2-fold) or DG/S 2.64.5.1 DALI Gateway Premium (2-fold) can install up to 2 x 64 DALI devices both via 2 x 16 flexible DALI (orange lined group) and KNX lighting groups (green dotted lined group), each with one or more DALI participants. Control and monitoring via KNX. Control and status feedback can also be carried out via Broadcast. 2 x 16 independent Lighting scenes are available.

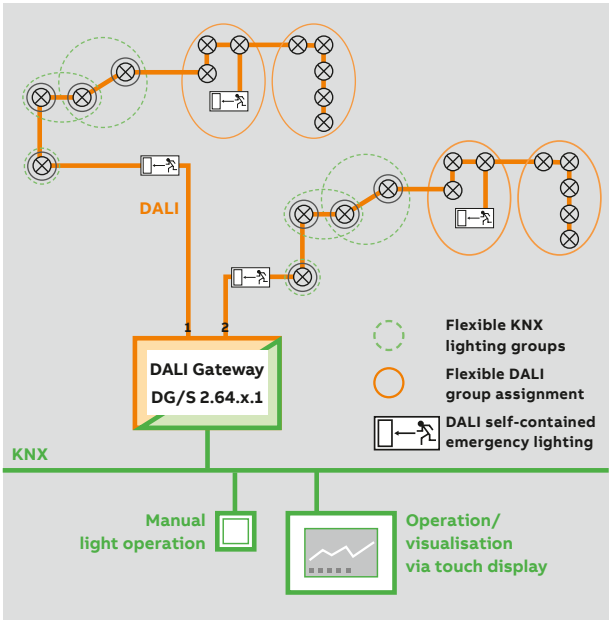

ABB i-bus® KNX

Lighting Control – DALI

DALI Light Controller DLR/S 8.16.1M
Energy through constant lighting control

Control via 16 lighting groups. Up to 8 lighting groups can be controlled with 8 Light Sensors. Master-slave, staircase light and Scene mode round off the functions.

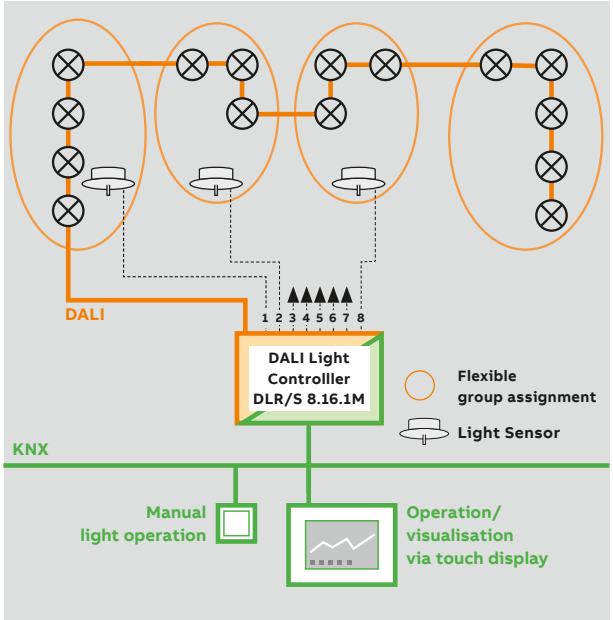

DALI Light Controller DLR/A 4.8.1.1
Decentralized Constant Lighting Control

The DALI Light Controller DLR/A 4.8.1.1 is a surface mounting device for switching and dimming of 8 independent lighting groups. A maximum of 64 DALI devices can be connected. The device can be used for 4-fold constant lighting control in connection with 4 Light Sensors LF/U 2.1. Furthermore staircase lighting and master/slave functions are provided. Fault feedback messages, e.g. concerning ballast or lamp failures, can be programmed and activated via KNX. The compact surface-mounted housing allows the decentralized installation in the underfloor or in false ceilings – optimal for the use with Room Controller RC/A.

DALI Gateway DG/S 8.1
The proven technology

Lighting groups are formed via “rigid” hardware wiring.
Fast commissioning as no addressing is necessary.
No readdressing when a ballast is exchanged. 8 x 16 DALI devices.

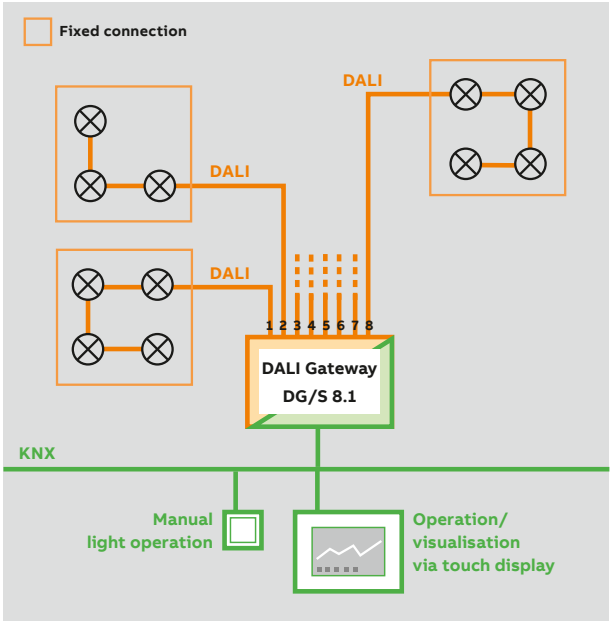

ABB i-bus® KNX

Lighting Control – DALI

	Gateways		
	DG/S 1.64.1.1	**DG/S 2.64.1.1**	**DG/S 8.1**
General			
Supply voltage	100 – 240 V AC (85...265 V AC; 110...240 V DC)	100 – 240 V AC (85...265 V AC; 110...240 V DC)	100 – 240 V AC (85...265 V AC; 110...240 V DC)
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail
Module width (space unit)	4	4	6
Number of outputs	1	2	8
Light Sensor inputs	–	–	–
Degree of protection	IP20	IP20	IP20
Integrated power supply	■	■	■
Number of DALI participants	64	2 x 64	8 x 16
Broadcast control	■	■	■
Number of group control	16	2 x 16	–
Individual control	64	2 x 64	–
DT1 Self-contained emergency lighting, IEC 62 386-202	■	■	–
DT8 lighting (Tunable White, Tc, RGB(W)), IEC 62 386-209	–	–	–
DTx standard DALI function (set, dim, scene...), IEC 62 386-102	■	■	■
Manual operation	■	■	■
DALI approval	DALI-2 certified	DALI-2 certified	trademarked
Supports long-frames	■	■	–
DALI firmware update via KNX	■	■	–
Functions			
Enable/disable DALI address assignment	■	■	–
Switching, dimming, set brightness	■	■	■
Human Centric Lighting (HCL)	–	–	–
Dim2Warm	–	–	–
RGB(W)*	–	–	–
HSV(W)* - Hue, Saturation and Value*	–	–	–
Load control*	–	–	–
Sequencer*	–	–	–
Individual set/dimming colour temperature per group/ballast	–	–	–
Tunable White Presets	–	–	–
Operating hours	–	–	–
Standby shutdown	–	–	–
Slave	■	■	■
Staircase lighting	■	■	■
Burn-in	■	■	■
Scenes, 8 bit call	■	■	■
Scenes, 1 bit call	–	–	■
Forced	■	■	–
Emergency lighting test	■	■	–
Partial failure	■	■	–
Constant light control	–	–	–
Reaction on KNX bus voltage failure	■	■	■
Reaction on KNX voltage recovery	■	■	■
Reaction on DALI bus voltage failure	■	■	■
Reaction on DALI voltage recovery	■	■	■
Power on level	■	■	–
Device or lamp fault	■	■	■
Cyclic monitoring telegram	■	■	■
DALI telegram rate modifiable	■	■	–
Commissioning and diagnostic functions (ABB i-bus® Tool)			
Device assignment	■	■	–
Group assignment	■	■	–
Fault DALI device	■	■	–
Fault lamp	■	■	–
Function test (ON/OFF/brightness value)	■	■	–
Commissioning constant light control	–	–	–
Test emergency lighting	■	■	–
Broadcast on/off	–	–	–
Shows if there are unaddressed DALI participants	–	–	–

■ = Function is supported

– = Function is not supported

* = From ETS application version 2.0

	Gateways		Light Control	
	DG/S 1.64.5.1	**DG/S 2.64.5.1**	**DLR/S 8.16.1M**	**DLR/A 4.8.1.1**
General				
Supply voltage	100 – 240 V AC (85...265 V AC; 110...240 V DC)	100 – 240 V AC (85...265 V AC; 110...240 V DC)	100 – 240 V AC (85...265 V AC; 110...240 V DC)	100 – 240 V AC (85...265 V AC; 110...240 V DC)
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	SM
Module width (space unit)	4	4	6	220 x 147 x 50 mm
Number of outputs	1	2	1	1
Light Sensor inputs	–	–	8	4
Degree of protection	IP20	IP20	IP20	IP54
Integrated power supply	■	■	■	■
Number of DALI participants	64	2 x 64	64	64
Broadcast control	■	■	■	■
Number of group control	16	2 x 16	16	8
Individual control	64	2 x 64	–	–
DT1 Self-contained emergency lighting, IEC 62 386-202	■	■	–	–
DT8 lighting (Tunable White, Tc, RGB(W)), IEC 62 386-209	■	■	–	–
DTx standard DALI function (set, dim, scene...), IEC 62 386-102	■	■	■	■
Manual operation	■	■	■	■
DALI approval	DALI-2 certified	DALI-2 certified	trademarked	trademarked
Supports long-frames	■	■	–	–
DALI firmware update via KNX	■	■	–	–
Functions				
Enable/disable DALI address assignment	■	■	■	■
Switching, dimming, set brightness	■	■	■	■
Human Centric Lighting (HCL)	■	■	–	–
Dim2Warm	■	■	–	–
RGB(W)*	■	■	–	–
HSV(W)* - Hue, Saturation and Value*	■	■	–	–
Load control*	■	■	–	–
Sequencer*	■	■	–	–
Individual set/dimming colour temperature per group/ballast	■	■	–	–
Tunable White Presets	■	■	–	–
Operating hours	■	■	–	–
Standby shutdown	■	■	–	–
Slave	■	■	■	■
Staircase lighting	■	■	■	■
Burn-in	■	■	■	■
Scenes, 8 bit call	■	■	■	■
Scenes, 1 bit call	■	■	■	■
Forced	■	■	■	■
Emergency lighting test	■	■	–	–
Partial failure	■	■	–	–
Constant light control	–	–	■	■
Reaction on KNX bus voltage failure	■	■	■	■
Reaction on KNX voltage recovery	■	■	■	■
Reaction on DALI bus voltage failure	■	■	■	■
Reaction on DALI voltage recovery	■	■	■	■
Power on level	■	■	■	■
Device or lamp fault	■	■	■	■
Cyclic monitoring telegram	■	■	■	■
DALI telegram rate modifiable	■	■	–	–
Commissioning and diagnostic functions (ABB i-bus® Tool)				
Device assignment	■	■	■	■
Group assignment	■	■	■	■
Fault DALI device	■	■	■	■
Fault lamp	■	■	■	■
Function test (ON/OFF/brightness value)	■	■	■	■
Commissioning constant light control	–	–	■	■
Test emergency lighting	■	■	–	–
Broadcast on/off	■	■	–	–
Shows if there are unaddressed DALI participants	■	■	–	–

■ = Function is supported

– = Function is not supported

* = From ETS application version 2.0

ABB i-bus® KNX

Lighting Control – DALI

DG/S 1.64.1.1

DALI Gateway, Basic, MDRC

Single-Master DALI Controller certificated acc. to DALI-2 (EN 62386). The device is used to control DALI or DALI-2 standard devices via ABB i-bus® KNX. One/Two DALI output(s) for up to 64/2x64 DALI participants. The DALI power supply is integrated. Control and status feedback is carried out via KNX per DALI participants (64/2 x 64), with lighting groups (16/2 x 16), together in broadcast or per scenes (16/2 x 16). Extensive fault and error messages are available. Slave-, staircase-, force-, block- and scene-function are integrated. Self-contained emergency converter, DT1 acc. EN 62386-202 will be supported. By means of KNX and emergency converter, different emergency tests (e.g., function and duration test) can be triggered. Other DALI devices e.g., DT6 can be controlled via standard DALI commands acc. to EN 62386-102.
For diagnostic use and individual change of the DALI address or group assignment a separate software tool (ABB i-bus® Tool) is available.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold	4	DG/S 1.64.1.1	2CDG110198R0011		0.18	1
2-fold	4	DG/S 2.64.1.1	2CDG110199R0011		0.19	1

DG/S 1.64.5.1

DALI Gateway, Premium, MDRC

Single-Master DALI Controller certificated acc. to DALI-2 (EN 62386). The device is used to control DALI or DALI-2 devices via ABB i-bus® KNX. One/Two DALI output(s) for up to 64/2 x 64 DALI participants. DALI power supply is integrated. Control and status feedback is carried out via KNX per DALI participants (64/2 x 64), with lighting groups (16/2 x 16), together in broadcast or per scenes (16/2 x 16). DALI devices type DT1 (Self-contained emergency converter acc. EN 62386-202) and type DT8 (colour temperature Tc & RGB(W) acc. EN 62386-209) will be supported. Other DALI devices e.g., DT6 can be controlled via standard DALI commands acc. to EN 62386-102.
Extensive fault and error messages are available. Slave-, staircase-, force-, block- and scene-function are integrated. Colour can set and dim, HSV(W)-, Dim2Warm-, HCL-function, 4 sequencer per DALI output can be used. A standby switch-off in combination with a KNX switch actuator (e.g., SA/S) and the integration of the DALI Gateways into a load control system are possible. By means of KNX and DT1 converter different emergency tests (e.g., function and duration test) can be triggered, test results are transferred back to KNX.
For diagnostic use and individual change of the DALI address or group assignment a separate software tool (ABB i-bus® Tool) is available.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
1-fold	4	DG/S 1.64.5.1	2CDG110273R0011		0.18	1
2-fold	4	DG/S 2.64.5.1	2CDG110274R0011		0.19	1

DG/S 8.1

DALI Gateway, 8-fold, MDRC

Single-Master DALI Controller DALI (EN 62386) trademarked. For controlling up to 128 standard DALI devices (DT0) acc. DALI or DALI-2. There are 8 separate, independent DALI outputs/channels available. Up to 16 DALI devices can be connected per channel. The DALI power supply is integrated in the gateway. The functions of switching, dimming, set values and fault indication for lamps and electronic ballasts are available for each output.
It is possible to set the lamp burn-in time and 16 light scenes. Commissioning is simplified as no addressing or commissioning of the DALI devices is necessary.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	DG/S 8.1	2CDG110025R0011		0.31	1

DLR/S 8.16.1M

DALI Light Controller, 8-fold, Manual Operation, MDRC

Single-Master DALI Controller DALI (EN 62386) trademarked. For switching and dimming of 16 independent lighting groups. A maximum of 64 standard DALI devices (DT0) acc. DALI or DALI-2 can be connected. The device can be used for 8-fold constant lighting control in connection with eight Light Sensors LF/U 2.1. Fault feedback messages can be programmed and activated via KNX. With comfortable manual operation and status display.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	DLR/S 8.16.1M	2CDG110101R0011		0.26	1

DLR/A 4.8.1.1

DALI Light Controller, 4-fold, SM

Single-Master DALI Controller DALI (EN 62386) trademarked. Surface mounting device for switching and dimming of 8 independent groups of luminaries. Up to 64 standard DALI participants (DT0) acc. DALI or DALI-2 can be connected to one DALI control line. When combined with the Light Sensor LF/U 2.1 the device can be used as a 4-fold light controller for constant light control. Additionally a staircase and master/slave function is integrated.
A great number of status feedback e.g. lamp and ballast fault can be transferred from DALI to KNX. With this functions the DALI light controller is a key factor in every energy efficient building automation. With his surface mounting housing it is possible to insert the device central in false ceiling or underfloor installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	DLR/A 4.8.1.1	2CDG110172R0011		0.66	1

ABB i-bus® KNX

Lighting Control – DALI

	Universal Dim Actuators	
	UD/S x.210.2.1	**UD/S x.315.2.1**
General		
Supply voltage	110 – 230 V AC ± 10 %, 50/60 Hz	110 – 230 V AC ± 10 %, 50/60 Hz
Type of installation	DIN-Rail	DIN-Rail
Module width (space unit)	6/8	4/8/12
Number of outputs	4/6	2/4/6
Maximum load per channel	4 x 210 W (1 x 600 W)/ 6 x 210 W (1 x 800 W)	2 x 315 W (1 x 500 W) 4 x 315 W (2 x 500 W) 6 x 315 W (2 x 700 W or 3 x 500 W)
Incoming supply	4/6 phase inputs	2/4/6 phase inputs
Load types		
230 V incandescent lamps	■	■
230 V halogen lamps	■	■
Low-voltage halogen lamps with conventional transformers or electronic transformers	■	■
LED strips or 12/24 V lamps	–	–
LED Retrofit 230 V	■	■
Grouping of channels for load increase	■	■
Switching		
Brightness value when turned on	■	■
Dimming speed for switching on and off	■	■
Dimming		
Min. and max. dimming values	■	■
Switching on/off via rel. dimming	■	■
Further functions		
Forced operation	■	■
Dimming curve adjustment	■	■
Reaction on bus voltage failure	■	■
Behavior on bus voltage recovery	■	■
Status feedback	■	■
Blocking channel	■	■
Scenes	■	■
Phase angle control: automatic, leading or trailing edge	■	■
Additional logic functions	■	■
Staircase lighting	■	■

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX
Lighting Control

	Switch/Dim Actuators			Constant Light Control	
	SD/S 2.16.1	**SD/S 4.16.1**	**SD/S 8.16.1**	**LR/S 2.16.1**	**LR/S 4.16.1**
General					
Supply voltage	KNX	KNX	KNX	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (space unit)	4	6	8	4	6
Number of outputs 1-10 V (passive)	2	4	8	2	4
Manual operation	■	■	■	■	■
Maximum current per control output	100 mA	100 mA	100 mA	100 mA	100 mA
Maximum cable length at maximum load (100 mA)	70 m (cable cross-section 0.8 mm²) 100 m (cable cross-section 1.5 mm²)	70 m (cable cross-section 0.8 mm²) 100 m (cable cross-section 1.5 mm²)	70 m (cable cross-section 0.8 mm²) 100 m (cable cross-section 1.5 mm²)	70 m (cable cross-section 0.8 mm²) 100 m (cable cross-section 1.5 mm²)	70 m (cable cross-section 0.8 mm²) 100 m (cable cross-section 1.5 mm²)
Light Sensor (LF/U 2.1)	–	–	–	2	4
Maximum cable length per sensor (P-YCYM or J-Y(ST)Y cable (SELV), diameter 0.8 mm	–	–	–	100 m	100 m
Power loss per device at max. load	2.6 W	5.2 W	10.4 W	2.6 W	5.2 W
Switching capacity					
Rated current I_n	16 A AC1	16 A AC1	16 A AC1	16 A AC1	16 A AC1
Rated voltage U_n	250/440 V AC	250/440 V AC	250/440 V AC	250/440 V AC	250/440 V AC
AC1 operation (cos ϕ = 0.8) DIN EN 60 947-4-1	16 A	16 A	16 A	16 A	16 A
AC3 operation (cos ϕ = 0.45) DIN EN 60 947-4-1	8 A/230 V	8 A/230 V	8 A/230 V	8 A/230 V	8 A/230 V
Fluorescent lighting load AX DIN EN 60 669-1	10 A (140 µF) 1)	10 A (140 µF) 1)	10 A (140 µF) 1)	10 A (140 µF) 1)	10 A (140 µF) 1)
Minimum switching capacity	100 mA/12 V	100 mA/12 V	100 mA/12 V	100 mA/12 V	100 mA/12 V
DC current switching capacity (resistive load)	10 A/24 V DC	10 A/24 V DC	10 A/24 V DC	10 A/24 V DC	10 A/24 V DC
Mechanical service life	> 3 x 10⁶	> 3 x 10⁶	> 3 x 10⁶	> 3 x 10⁶	> 3 x 10⁶
Electronic endurance to DIN IEC 60 947-4-1					
Rated current AC1 (240 V/cos ϕ = 0.8)	100,000	100,000	100,000	100,000	100,000
Rated current AC3 (240 V/cos ϕ = 0.45)	30,000	30,000	30,000	30,000	30,000
Rated current AC5a (240 V/cos ϕ = 0.45)	30,000	30,000	30,000	30,000	30,000
Incandescent lamp load at 230 V AC	2,300 W	2,300 W	2,300 W	2,300 W	2,300 W
Fluorescent lamps T5/T8					
Uncorrected	2,300 W	2,300 W	2,300 W	2,300 W	2,300 W
Parallel compensated	1,500 W	1,500 W	1,500 W	1,500 W	1,500 W
DUO circuit	1,500 W	1,500 W	1,500 W	1,500 W	1,500 W
Low-voltage halogen lamps					
Inductive transformer	1,200 W	1,200 W	1,200 W	1,200 W	1,200 W
Electronic transformer	1,500 W	1,500 W	1,500 W	1,500 W	1,500 W
Halogen lamp 230 V	2,500 W	2,500 W	2,500 W	2,500 W	2,500 W
Dulux lamps					
Uncorrected	1,100 W	1,100 W	1,100 W	1,100 W	1,100 W
Parallel compensated	1,100 W	1,100 W	1,100 W	1,100 W	1,100 W
Mercury-vapour lamps					
Inductive transformer	2,000 W	2,000 W	2,000 W	2,000 W	2,000 W
Electronic transformer	2,000 W	2,000 W	2,000 W	2,000 W	2,000 W

■ = Function is supported

– = Function is not supported

1) = The maximum peak inrush current may not be exceeded

ABB i-bus® KNX
Lighting Control

	Switch/Dim Actuators			Constant Light Control	
	SD/S 2.16.1	**SD/S 4.16.1**	**SD/S 8.16.1**	**LR/S 2.16.1**	**LR/S 4.16.1**
Sodium-vapour lamps					
Inductive transformer	2,000 W	2,000 W	2,000 W	2,000 W	2,000 W
Electronic transformer	2,000 W	2,000 W	2,000 W	2,000 W	2,000 W
Max. peak inrush-current I_p (150 µs)	400 A	400 A	400 A	400 A	400 A
Max. peak inrush-current I_p (250 µs)	320 A	320 A	320 A	320 A	320 A
Max. peak inrush-current I_p (600 µs)	200 A	200 A	200 A	200 A	200 A
Number of ballasts (T5/T8, single element) e.g.[1)]					
18 W (ABB EVG 1 x 18 SF)	23	23	23	23	23
24 W (ABB EVG 1 x 24 CY)	23	23	23	23	23
36 W (ABB EVG 1 x 36 CF)	14	14	14	14	14
58 W (ABB EVG 1 x 58 CF)	11	11	11	11	11
80 W (Helvar EL 1 x 80 SC)	10	10	10	10	10

	Switch/Dim Actuators			Constant Light Control	
	SD/S 2.16.1	**SD/S 4.16.1**	**SD/S 8.16.1**	**LR/S 2.16.1**	**LR/S 4.16.1**
Functions					
Brightness control	–	–	–	■	■
Brightness value	■	■	■	■	■
Dimming speed for transition brightness values	■	■	■	■	■
Min. and max. value limits	■	■	■	■	■
Set switching on and off via value	■	■	■	■	■
Presets	■	■	■	■	■
Scenes	■	■	■	■	■
Switch					
Brightness value when turned on	■	■	■	■	■
Dimming speed for switching on and off	■	■	■	■	■
Dimming					
Dimming speed can be changed via KNX	■	■	■	■	■
Min. and max. dimming values	■	■	■	■	■
Switching on/off via rel. dimming	■	■	■	■	■
Forced operation					
2-bit coded forced operation	■	■	■	■	■
Behaviour after voltage recovery	■	■	■	■	■
Block Activate output via 1-bit object	■	■	■	■	■
Special					
4-point characteristic adjustment	■	■	■	■	■
Preference with bus voltage failure	■	■	■	■	■
Status feedback	■	■	■	■	■
Additional					
Slave mode e.g. for integration in the constant lighting control	■	■	■	■	■
Staircase lighting	■	■	■	■	■
Prewarning via dimming and/or KNX object	■	■	■	■	■
Commissioning and diagnostic functions					
Control and diagnosis via ABB i-bus® Tool	–	–	–	■	■

■ = Function is supported

– = Function is not supported

1) = For multiple element lamps or other types, the number of electronic ballasts must be determined using the peak inrush current of the electronic ballasts

LR/S 4.16.1

Light Controller, 1-10 V, MDRC

The device enables the switching and dimming of 2 or 4 independent lighting circuits in conjunction with electronic ballasts. In combination with the Light Sensor LF/U 2.1, the device can be used for constant lighting control. 2 or 4 Light Sensors can be connected to the controller for precise detection of the lighting conditions.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	4	LR/S 2.16.1	2CDG110087R0011		0.25	1
4-fold	6	LR/S 4.16.1	2CDG110088R0011		0.40	1

LF/U 2.1

Light Sensor, FM

Used for implementing constant lighting control applications in conjunction with light controllers LR/S, LR/M, DLR/S 8.16.1M or DLR/A 4.8.1.1. The scope of delivery includes different optical rods, the connection terminals and the cover for discrete fitting in a room.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	LF/U 2.1	2CDG110089R0011		0.07	1

SD/S 8.16.1

Switch/Dim Actuator, 16 A, MDRC

Used for switching and dimming of 2, 4 or 8 independent groups of luminaries with electronic ballasts with 1 – 10 V control interfaces. On each channel the power supply of the ballasts is switched by a floating load relay (16 A – AC1). Every output can be operated manually and features display of the switching state. The device can assume a range of applications thanks to the programming options.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
2-fold	4	SD/S 2.16.1	2CDG110079R0011		0.21	1
4-fold	6	SD/S 4.16.1	2CDG110080R0011		0.32	1
8-fold	8	SD/S 8.16.1	2CDG110081R0011		0.56	1

ABB i-bus® KNX
Lighting Control

UD/S 4.210.2.1

LED Dimmer, 4-fold, 210 W/VA, MDRC
Multichannel universal dimming actuator optimised for dimming of retrofit LED lamps (LEDi). Also suitable for dimming of incandescent lamps, low-voltage halogen lamps with conventional or electronic transformers, 230 V incandescent halogen lamps and dimmable halogen energy-saving lamps. Automatic load detection (deactivatable). One separate N-terminal per channel. Channel bridging possible in order to increase the maximum load. Outputs can be switched in parallel as required. Minimum load: 2 W. Manual operation on the device is possible also without bus voltage or in unprogrammed state. One LED control button per channel (including status indication) for ON and OFF switching as well as for up and down dimming. Programming of the device is possible without connecting 230 V supply voltage. Comprehensive test and diagnostic functions via the i-bus® Tool. Fast parameterization in the ETS by means of copyable channel templates. With integrated bus coupler.
Rated power at 230 V ~:
- 230 V ~ incandescent and halogen lamps: 4 x 210 W/VA to 1 x 600 W/VA.
- Dimmable 230 V ~ LEDi: 4 x 210 W/VA to 1 x 600 W/VA in trailing edge mode, 4 x 80 W/VA to 1 x 200 W/VA in leading edge mode.
- Inductive L-transformers with LED/low-voltage halogen lamps: 4 x 210 W/VA to 1 x 600 W/VA.
- Electronic C-transformers with LED/low voltage halogen lamps: 4 x 210 W/VA to 1 x 600 W/VA.
- Electronic LC transformers with LED/low-voltage halogen lamps: 4 x 80 W/VA to 1 x 200 W/VA.

Recommendation: Always use bulbs of one type and manufacturer.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold	6	UD/S 4.210.2.1	2CKA006197A0047		0.28	1

UD/S 6.210.2.1

LED Dimmer, 6-fold, 210 W/VA, MDRC
Multichannel universal dimming actuator optimised for dimming of retrofit LED lamps (LEDi). Also suitable for dimming of incandescent lamps, low-voltage halogen lamps with conventional or electronic transformers, 230 V incandescent halogen lamps and dimmable halogen energy-saving lamps. Automatic load detection (deactivatable). One separate N-terminal per channel. Channel bridging possible in order to increase the maximum load. Outputs can be switched in parallel as required. Minimum load: 2 W. Manual operation on the device is possible also without bus voltage or in unprogrammed state. One LED control button per channel (including status indication) for ON and OFF switching as well as for up and down dimming. Programming of the device is possible without connecting 230 V supply voltage. Comprehensive test and diagnostic functions via the i-bus® Tool. Fast parameterization in the ETS by means of copyable channel templates. With integrated bus coupler.
Rated power at 230 V ~:
- 230 V ~ incandescent and halogen lamps: 6 x 210 W/VA to 1 x 800 W/VA.
- Dimmable 230 V ~ LEDi: 6 x 210 W/VA to 1 x 800 W/VA in trailing edge mode, 6 x 80 W/VA to 1 x 240 W/VA in leading edge mode.
- Inductive L-transformers with LED/low-voltage halogen lamps: 6 x 210 W/VA to 1 x 800 W/VA.
- Electronic C-transformers with LED/low voltage halogen lamps: 6 x 210 W/VA to 1 x 800 W/VA.
- Electronic LC transformers with LED/low-voltage halogen lamps: 6 x 80 W/VA to 1 x 240 W/VA.

Recommendation: Always use bulbs of one type and manufacturer.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
6-fold	8	UD/S 6.210.2.1	2CKA006197A0049		0.58	1

UD/S 2.315.2.1

LED Dimmer, 2-fold, 315 W/VA, MDRC

Multichannel universal dimming actuator optimised for dimming of retrofit LED lamps (LEDi). Also suitable for dimming of incandescent lamps, low-voltage halogen lamps with conventional or electronic transformers, 230 V incandescent halogen lamps and dimmable halogen energy-saving lamps. Automatic load detection (deactivatable). One separate N-terminal per channel. Channel bridging possible in order to increase the maximum load. Outputs can be switched in parallel in groups as required. Minimum load: 2 W. Manual operation on the device is possible also without bus voltage or in unprogrammed state. One LED control button per channel (including status indication) for ON and OFF switching as well as for up and down dimming. Programming of the device is possible without connecting 230 V supply voltage. Comprehensive test and diagnostic functions via the i-bus® Tool. Fast parameterization in the ETS by means of copyable channel templates. With integrated bus coupler.

Rated power at 230 V ~:

- 230 V ~ incandescent and halogen lamps: 2 x 315 W/VA to 1 x 500 W/VA.
- Dimmable 230 V ~ LEDi: 2 x 315 W/VA to 1 x 500 W/VA.in trailing edge mode,
- 2 x 120 W/VA to 1 x 200 W/VA in leading edge mode.
- Inductive L-transformers with LED/low-voltage halogen lamps: 2 x 315 W/VA to 1 x 500 W/VA.
- Electronic C-transformers with LED/low voltage halogen lamps: 2 x 315 W/VA to 1 x 500 W/VA.
- Electronic LC transformers with LED/low-voltage halogen lamps: 2 x 120 W/VA to 1 x 200 W/VA.

Recommendation: Always use bulbs of one type and manufacturer.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	UD/S 2.315.2.1	2CKA006197A0053		0.29	1

UD/S 4.315.2.1

LED Dimmer, 4-fold, 315 W/VA, MDRC

Multichannel universal dimming actuator optimised for dimming retrofit LED lamps (LEDi). Also suitable for dimming incandescent lamps, low-voltage halogen lights with conventional or electronic transformers, 230 V halogen lamps and dimmable energy-saving halogen lamps. Automatic load detection (can be deactivated). Separate N-connection per channel. Parallel connection of the outputs possible to increase the output power. Outputs can be connected in parallel in groups. Minimum load: 2 W. Manual operation on device also possible without bus voltage or in an unprogrammed status. Programming of the device also possible without applied 230 V supply voltage. Extensive test and diagnosis functions for the i-bus® Tool. Fast parameter setting in ETS using copyable channel templates. With integrated bus coupler.

Nominal power at 230 V~ mains voltage:

- 230 V~ incandescent and halogen lamps: 4 x 315 W/VA to 2 x 500 W/VA in trailing edge control, 4 x 120 W/VA to 2 x 200 W/VA in leading edge control.
- Dimmable 230 V~ LEDi: 4 x 315 W/VA to 2 x 500 W/VA in trailing edge control, 4 x 120 W/VA to 2 x 200 W/VA in leading edge control.
- Inductive L-transformers with LED/low-voltage halogen lamp: 4 x 315 W/VA to 2 x 500 W/VA. Electronic C-transformers with LED/low-voltage halogen lamp: 4 x 315 W/VA to 2 x 500 W/VA.
- Electronic LC-transformers with LED/low-voltage halogen lamp: 4 x 120 W/VA to 2 x 200 W/VA.

Recommendation: Always use bulbs of one type and manufacturer.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	UD/S 4.315.2.1	2CKA006197A0057		0.56	1

ABB i-bus® KNX
Lighting Control

UD/S 6.315.2.1

LED Dimmer, 6-fold, 315 W/VA, MDRC

Multichannel universal dimming actuator optimised for dimming of retrofit LED lamps (LEDi). Also suitable for dimming of incandescent lamps, low-voltage halogen lamps with conventional or electronic transformers, 230 V incandescent halogen lamps and dimmable halogen energy-saving lamps. Automatic load detection (deactivatable). One separate N-terminal per channel. Channel bridging possible in order to increase the maximum load. Outputs can be switched in parallel in groups as required. Minimum load: 2 W. Manual operation on the device is possible also without bus voltage or in unprogrammed state. One LED control button per channel (including status indication) for ON and OFF switching as well as for up and down dimming. Programming of the device is possible without connecting 230 V supply voltage. Comprehensive test and diagnostic functions via the i-bus® Tool. Fast parameterization in the ETS by means of copyable channel templates. With integrated bus coupler.

Rated power at 230 V ~:

- 230 V ~ incandescent and halogen lamps: 6 x 315 W/VA, 2 x 700 W/VA to 3 x 500 W/VA.
- Dimmable 230 V ~ LEDi: 6 x 315 W/VA, 2 x 700 W/VA to 3 x 500 W/VA in trailing edge mode,
- 6 x 120 W/VA, 2 x 250 W/VA to 3 x 300 W/VA in leading edge mode.
- Inductive L-transformers with LED/low-voltage halogen lamps: 6 x 315 W/VA, 2 x 700 W/VA to 3 x 500 W/VA.
- Electronic C-transformers with LED/low voltage halogen lamps: 6 x 315 W/VA, 2 x 700 W/VA to 3 x 500 W/VA.
- Electronic LC transformers with LED/low-voltage halogen lamps: 6 x 120 W/VA, 2 x 250 W/VA to 3 x 300 W/VA.

Recommendation: Always use bulbs of one type and manufacturer.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	12	UD/S 6.315.2.1	2CKA006197A0061			1

HS/S 4.2.1

Outside Light Sensor Interface, MDRC

The device is used for the connection and evaluation of up to 3 Outside Light Sensors LFO/A 1.1. The Outside Light Sensors can be analysed individually or combined. Amongst others 10 logical switching channels for the evaluation of threshold values are provided. Threshold values can be adjusted directly on the device. The device can be used as a twilight switch (1 ... 100 lx) or as a light value switch (100 ... 100.000 lx). One Outside Light Sensor LFO/A 1.1 is supplied with the device.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	3	HS/S 4.2.1	2CDG120044R0011		0.24	1

LFO/A 1.1

Outside Light Sensor for HS/S4.2.1, SM

Outside Light Sensor for the connection with the Interface HS/S 4.2.1.
Temperature range (sensor): –40 °C to +70 °C.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	LFO/A 1.1	2CDG120045R0011		0.05	1

ABB i-bus® KNX

Movement and Presence Detection

	Mini Basic 6131/20-xxx-500	Mini Premium 6131/21-xxx-500	Basic 6131/30-xxx-500	Premium 6131/31-xxx-500	Sky 6131/40-xxx-500	Corridor Basic 6131/50-xxx-500	Corridor Premium 6131/51-xxx-500
General							
Supply voltage	KNX	KNX	KNX	KNX	KNX	KNX	KNX
Type of installation	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted	flush-mounted/ surface-mounted
Programming button accessible from outside	■	■	■	■	■	■	■
Detection range diameter (sitting/frontal/lateral)							
Installation height 2.5 m	Max. 5.0 m/ 4.5 m/ 6.5 m	Max. 5.0 m/ 4.5 m/ 6.5 m	Max. 8.0 m/ 7.0 m/ 10.0 m	Max. 8.0 m/ 7.0 m/ 10.0 m	–	Max. –/ 18 x 2.5 m/ 24 x 2.5 m	Max. –/ 18 x 2.5 m/ 24 x 2.5 m
Installation height 3.0 m	Max. 6.5 m/ 6.0 m/ 8.0 m	Max. 6.5 m/ 6.0 m/ 8.0 m	Max. 10.0 m/ 8.0 m/ 12.0 m	Max. 10.0 m/ 8.0 m/ 12.0 m	–	Max. –/ 20 x 2.5 m/ 30 x 2.5 m	Max. –/ 20 x 2.5 m/ 30 x 2.5 m
Installation height 4.0 m	Max. 9.0 m/ 7.0 m/ 10.5 m	Max. 9.0 m/ 7.0 m/ 10.5 m	Max. 14.0 m/ 10.0 m/ 16.0 m	Max. 14.0 m/ 10.0 m/ 16.0 m	–	Max. –/ 20 x 2.5 m/ 30 x 2.5 m	Max. –/ 20 x 2.5 m/ 30 x 2.5 m
Installation height 6.0 m	–	–	–	–	Max. –/ 18.0 m/ 18.0 m	–	–
Installation height 12.0 m	–	–	–	–	Max. –/ 18.0 m/ 18.0 m	–	–
Channels							
Overall number of channels	2	4	2	4	2	2	4
Movement detector	2	4	2	4	2	2	4
Constant light switch	2	4	2	4	2	2	4
Constant light controller	–	2	–	2	–	–	2
Heating/cooling/ventilation systems (HVAC)	–	1	–	1	–	–	1
Infrared receiver, can be operated via IR remote control 6010-25	–	10 button pairs + 4 single buttons/ 24 single buttons	–	10 button pairs + 4 single buttons/ 24 single buttons	(only red for activation of the programming mode)	–	10 button pairs + 4 single buttons/ 24 single buttons
Two power-off stages							
Movement detector	■	■	■	■	■	■	■
Constant light control	–	■	–	■	–	–	■

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

Movement and Presence Detection

	Mini Basic 6131/20-xxx-500	Mini Premium 6131/21-xxx-500	Basic 6131/30-xxx-500	Premium 6131/31-xxx-500	Sky 6131/40-xxx-500	Corridor Basic 6131/50-xxx-500	Corridor Premium 6131/51-xxx-500
Application							
Movement detector	■	■	■	■	■	■	■
Surveillance detector	■	■	■	■	■	■	■
Constant light switch	■	■	■	■	–	–	–
Constant light controller	■	■	■	■	■	■	■
Controller independent of movement	–	■	–	■	–	–	■
Various							
Integrated object room temperature controller	–	1	–	1	–	–	1
With temperature sensor	–	■	–	■	–	■	–
Integrated humidity controller with dew point alarm	–	–	–	–	–	–	–
With humidity sensor	–	–	–	–	–	–	–
Brightness measurement	■	■	■	■	■	■	■
Calibration of brightness sensor via ETS group objects	■	■	■	■	■	■	■
IP rating	IP20	IP20	IP20	IP20	IP20	IP20	IP20
KNX Data Secure	–	–	–	–	–	–	–
Programming mode can be activated via IR remote control 6010-25	–	■	–	■	■	–	■
Programming LED can be activated via ETS group objects	■	■	■	■	■	■	■
Number of logic functions	–	5	–	5	–	–	5

■ = Function is supported

– = Function is not supported

	Basic BMH/U2.1.1-xxx	**Basic IP55 BMH/U2.55.1-xxx**	**Premium BMH/U4.5.1-xxx**	**Basic PMH/U2.1.1-xxx**	**Premium PMH/U4.5.1-xxx**
General					
Supply voltage	KNX	KNX	KNX	KNX Aux. Input 24 V DC	KNX Aux. Input 24 V DC
Type of installation	flush-mounted/ surface- mounted	flush-mounted/ surface- mounted	flush-mounted/ surface- mounted	flush-mounted/ surface- mounted	flush-mounted/ surface- mounted
Programming button accessible from outside	■	■	■	■	■
Detection range diameter (sitting/frontal/lateral)					
Installation height 2.5 m	Max. –/ 8.0 m/ 10.0 m	Max. –/ 8.0 m/ 10.0 m	Max. –/ 8.0 m/ 10.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m
Installation height 3.0 m	Max. –/ 10.0 m/ 12.0 m	Max. –/ 10.0 m/ 12.0 m	Max. –/ 10.0 m/ 12.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m
Installation height 4.0 m	Max. –/ 8.0 m/ 10.0 m	Max. –/ 8.0 m/ 10.0 m	Max. –/ 8.0 m/ 10.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m	Max. 8.0 m/ 8.0 m/ 10.0 m
Installation height 6.0 m	–	–	–	–	–
Installation height 12.0 m	–	–	–	–	–
Channels					
Overall number of channels	2	2	4	2	4
Movement detector	2	2	4	2	4
Constant light switch	2	2	4	2	4
Constant light controller	–	–	4	–	4
Heating/cooling/ventilation systems (HVAC)	–	–	4	–	4
Infrared receiver, can be operated via IR remote control 6010-25	–	–	–	–	–
Two power-off stages					
Movement detector	■	■	■	■	■
Constant light control	–	–	■	–	■

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

Movement and Presence Detection

	Basic BMH/U2.1.1-xxx	Basic IP55 BMH/U2.55.1-xxx	Premium BMH/U4.5.1-xxx	Basic PMH/U2.1.1-xxx	Premium PMH/U4.5.1-xxx
Application					
Movement detector	■	■	■	■	■
Surveillance detector	■	■	■	■	■
Constant light switch	■	■	■	■	■
Constant light controller	–	–	■	–	■
Controller independent of movement	–	–	■	–	■
Various					
Integrated object room temperature controller	–	–	1	–	1
With temperature sensor	■	–	■	■	■
Integrated humidity controller with dew point alarm	–	–	1	–	1
With humidity sensor	■	–	■	■	■
Brightness measurement	■	■	■	■	■
Calibration of brightness sensor via ETS group objects	■	■	■	■	■
IP rating	IP20	IP55	IP20	IP20	IP20
KNX Data Secure	■	■	■	■	■
Programming mode can be activated via IR remote control 6010-25	–	–	–	–	–
Programming LED can be activated via ETS group objects	■	■	■	■	■
Number of logic functions	1	1	5	1	5

■ = Function is supported

– = Function is not supported

	Standard PMB/U1.1-916	**Corridor PMB/U2.1-916**	**Wide Range PMB/U3.1-916**	**Flat BMB/U1.1-916**
General				
Supply voltage	KNX	KNX	KNX	KNX
Type of installation	flush- mounted/ surface-mounted	flush- mounted/ surface-mounted	flush- mounted/ surface-mounted	flush- mounted
Programming button accessible from outside	–	–	–	■
Detection range diameter (sitting/frontal/lateral)				
Installation height 2.5 m	Max. 4.5 m/ 2.5 m/ 8.0 m	Max. – / 12 x 2.5 m/ 32 x 2.5 m	Max. 4.5 m/ 2.5 m/ 20.0 m	Max. 4.0 m/ 2.0 m/ 9.0 m
Installation height 3.0 m	Max. 6.0 m/ 4.0 m/ 10.0 m	Max. – / 16 x 3.0 m / 40 x 5.0 m	Max. 6.0 m/ 4.0 m/ 24.0 m	Max. 6.0 m/ 4.0 m/ 11.0 m
Installation height 4.0 m	Max. –/ 5.0 m/ 12.0 m	Max. – / 16 x 3.0 m / 40 x 5.0 m	Max. –/ 5.0 m/ 30.0 m	Max. –/ 5.0 m/ 12.0 m
Installation height 6.0 m	–	–	–	–
Installation height 12.0 m	–	–	–	–
Channels				
Overall number of channels	4	4	4	4
Movement detector	2	2	2	2
Constant light switch	–	–	–	–
Constant light controller	1	1	1	1
Heating/cooling/ventilation systems (HVAC)	1	1	1	1
Infrared receiver, can be operated via IR remote control 6010-25	–	–	–	–
Two power-off stages				
Movement detector	■	■	■	■
Constant light control	■	■	■	■

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

Movement and Presence Detection

	Standard PMB/U1.1-916	Corridor PMB/U2.1-916	Wide Range PMB/U3.1-916	Flat BMB/U1.1-916
Application				
Movement detector	■	■	■	■
Surveillance detector	–	–	–	–
Constant light switch	–	–	–	–
Constant light controller	■	■	■	■
Controller independent of movement	■	■	■	■
Various				
Integrated object room temperature controller	–	–	–	–
With temperature sensor	■	■	■	■
Integrated humidity controller with dew point alarm	–	–	–	–
With humidity sensor	–	–	–	–
Brightness measurement	■	■	■	■
Calibration of brightness sensor via ETS group objects	■	■	■	■
IP rating	IP20	IP20	IP20	IP20
KNX Data Secure	■	■	■	■
Programming mode can be activated via IR remote control 6010-25	–	–	–	–
Programming LED can be activated via ETS group objects	■	■	■	■
Number of logic functions	1	1	1	1

■ = Function is supported

– = Function is not supported

BMH/U2.1.1-885

Movement Detector HF KNX, Basic **NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular. Ø: max. 10 m, max. 12 m and max. 10 m. 5,8 GHz HF technology. With 2 channels and integrated brightness, temperature and humidity sensor. Detectors application with 2 power off stages. Detectors application with integrated monitoring function. Constant light switch with up to two independent channels. Constant light switch with max. 2 outputs for brightness-dependent switching of two light bands in the area. With integrated KNX bus coupler. Suitable for false ceilings (Hole size: Ø 68 mm), surface mounting installation in combination with PMA/A1.xx-88x or in British Standard (PMA/K2.1-88x) or VDE flush-mounted box (PMA/K1.xx.-88x).
The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	BMH/U2.1.1-884	2TYZ510205G0601			1
black	–	BMH/U2.1.1-885	2TYZ510205G0701			1

BMH/U2.55.1-884

Movement Detector HF KNX, Basic, IP55 **NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular. Ø: max. 10 m, max. 12 m and max. 10 m. 5,8 GHz HF technology. With 2 channels and integrated brightness sensor. IP55 protection. Detectors application with 2 power off stages. Detectors application with integrated monitoring function. Constant light switch with up to two independent channels. Constant light switch with max. 2 outputs for brightness-dependent switching of two light bands in the area. With integrated KNX bus coupler. Suitable for false ceilings (Hole size: Ø 68 mm), surface mounting installation in combination with PMA/A1.xx-88x or in British Standard (PMA/K2.1-88x) or VDE flush-mounted box (PMA/K1.xx.-88x).
The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	BMH/U2.55.1-884	2TYZ510505G0601			1
black	–	BMH/U2.55.1-885	2TYZ510505G0701			1

BMH/U4.5.1-884

Movement Detector HF KNX, Premium **NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular. Ø: max. 10 m, max. 12 m and max. 10 m. 5,8 GHz HF technology. With 4 channels and integrated brightness, temperature and humidity sensor. Detectors application with 2 power off stages. Detectors application with integrated monitoring function. Constant light controller with up to two independent channels. Constant light controller with max. 2 outputs for brightness-dependent switching of two light bands in the area. Integrated object room temperature controller. Incl. 5 logic channels. With integrated KNX bus coupler. Suitable for false ceilings (Hole size: Ø 68 mm), surface mounting installation in combination with PMA/A1.xx-88x or in British Standard (PMA/K2.1-88x) or VDE flush-mounted box (PMA/K1.xx.-88x).
The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	BMH/U4.5.1-884	2TYZ510215G0601			1
black	–	BMH/U4.5.1-885	2TYZ510215G0701			1

ABB i-bus® KNX

Movement and Presence Detection

PMH/U2.1.1-884

Presence Detector HF KNX, Basic **NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular. Ø: max. 10 m. 24 GHz HF technology. Adjustable detection range via ETS application. With 2 channels and integrated brightness, temperature and humidity sensor. Detectors application with 2 power off stages. Detectors application with integrated monitoring function. Constant light switch with up to two independent channels. Constant light switch with max. 2 outputs for brightness-dependent switching of two light bands in the area. With integrated KNX bus coupler. Suitable for false ceilings (Hole size: Ø 68 mm), surface mounting installation in combination with PMA/A1.xx-88x or in British Standard (PMA/K2.1-88x) or VDE flush-mounted box (PMA/K1.xx.-88x). The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMH/U2.1.1-884	2TYZ510202G0601			1
black	–	PMH/U2.1.1-885	2TYZ510202G0701			1

PMH/U4.5.1-884

Presence Detector HF KNX, Premium **NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m): circular. Ø: max. 10 m. 24 GHz HF technology. Adjustable detection range via ETS application. With 4 channels and integrated brightness, temperature and humidity sensor. Detectors application with 2 power off stages. Detectors application with integrated monitoring function. Constant light controller with up to two independent channels. Constant light controller with max. 2 outputs for brightness-dependent switching of two light bands in the area. Integrated object room temperature controller. Incl. 5 logic channels. With integrated KNX bus coupler. Suitable for false ceilings (Hole size: Ø 68 mm), surface mounting installation in combination with PMA/A1.xx-88x or in British Standard (PMA/K2.1-88x) or VDE flush-mounted box (PMA/K1.xx.-88x). The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMH/U4.5.1-884	2TYZ510212G0601			1
black	–	PMH/U4.5.1-885	2TYZ510212G0701			1

PMA/K2.1-884

Presence Detector HF, VDE mounting kit **NEW**

VDE Mounting Kit for Movement Detector HF and Presence Detector HF.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMA/K2.1-884	2TYZ510000G0603			1
black	–	PMA/K2.1-885	2TYZ510000G0703			1

PMA/K1.1-884

Presence Detector HF, BS mounting kit **NEW**

British Standard Mounting Kit for Movement Detector HF and Presence Detector HF.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMA/K1.1-884	2TYZ510000G0601			1
black	–	PMA/K1.1-885	2TYZ510000G0701			1

PMA/A1.1-884

Presence Detector HF, SM box **NEW**

Surface Mounting Box for Movement Detector HF and Presence Detector HF.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMA/A1.1-884	2TYZ510000G0602			1
black	–	PMA/A1.1-885	2TYZ510000G0702			1

ABB i-bus® KNX

Movement and Presence Detection

PMB/U1.1-916

ABB Presence detector BasicLINE KNX Standard **NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular).
Sitting persons Ø: 4.5 m/6.0 m/–.
Frontal walking Ø: 2.5 m/4.0 m/5.0 m.
Lateral walking Ø: 8.0 m/10.0 m/12.0 m.
Sensitivity of the watchdog adjustable via ETS-parameter.
Operating modes: Automatic, Semi-automatic.
For switching on/off light bands depending on the room brightness.
Regulation in response to the movement possible.
Using the device as presence and/or movement detector.
2 channels for detector application, 1 channel for constant light control and 1 channel for HVAC.
Integrated brightness sensor.
Integrated temperature sensor.
Brightness range: 10 - 3.000 Lux.
Brightness adjustment via KNX communication objects.
Two-stage switch-off with delay time and reduced brightness.
The KNX programming LED can be activated for the walk-test function via KNX.
With integrated KNX bus coupler and power supply via KNX bus.
Easy Master-Slave operation of several presence detectors possible.
Mounting height: 2 m - 4 m.
Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.
Hole size: Ø 68 mm.
Suitable for surface mounting installations in combination with the surface-mounted box 6884-500.
Cannot be installed in British Standard box.
Dimensions: (H x D): 45 mm * 105 mm.
Visible height: 23.5 mm.
Mounting depth: 21.5 mm.
Mounting depth (including spring clip): 48.0 mm * 65.0 mm.
Temperature range (device): –20 °C – +45 °C.
Storage temperature range: –20 °C – +70 °C.
Protection class (device): IP 20 (IP54 in combination with 6884-500).
The devices support KNX Data Secure.
Available from November 2025

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMB/U1.1-916	2CKA006132A0462			1

PMB/U2.1-916

ABB Presence detector BasicLINE KNX Corridor **NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m):
Sitting persons Ø: –/–/–.
Frontal walking Ø: 12.0 x 2.5 m/16.0 x 3.0 m/16.0 x 3.0 m.
Lateral walking Ø: 32.0 x 2.5 m/40.0 x 5.0 m/40.0 x 5.0 m.
Sensitivity of the watchdog adjustable via ETS-parameter.
Operating modes: Automatic, Semi-automatic.
For switching on/off light bands depending on the room brightness.
Regulation in response to the movement possible.
Using the device as presence and/or movement detector.
2 channels for detector application, 1 channel for constant light control and 1 channel for HVAC.
Integrated brightness sensor.
Integrated temperature sensor.
Brightness range: 10 - 3.000 Lux.
Brightness adjustment via KNX communication objects.
Two-stage switch-off with delay time and reduced brightness.
The KNX programming LED can be activated for the walk-test function via KNX.
With integrated KNX bus coupler and power supply via KNX bus.
Easy Master-Slave operation of several presence detectors possible.
Mounting height: 2 m - 4 m.
Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.
Hole size: Ø 68 mm.
Suitable for surface mounting installations in combination with the surface-mounted box 6884-500.
Cannot be installed in British Standard box.
Dimensions: (H x D): 60.0 mm * 105 mm.
Visible height: 38.0 mm.
Mounting depth: 21.5 mm.
Mounting depth (including spring clip): 48.0 mm * 65.0 mm.
Temperature range (device): –20 °C – +45 °C.
Storage temperature range: –20 °C – +70 °C.
Protection class (device): IP 20 (IP54 in combination with 6884-500).
The devices support KNX Data Secure.
Available from November 2025

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMB/U2.1-916	2CKA006132A0464			1

ABB i-bus® KNX

Movement and Presence Detection

PMB/U3.1-916

ABB Presence detector BasicLINE KNX Wide Range **NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular).
Sitting persons Ø: 4.5 m/6.0 m/–.
Frontal walking Ø: 2.5 m/4.0 m/5.0 m.
Lateral walking Ø: 20.0 m/24.0 m/30.0 m.
Sensitivity of the watchdog adjustable via ETS-parameter.
Operating modes: Automatic, Semi-automatic.
For switching on/off light bands depending on the room brightness.
Regulation in response to the movement possible.
Using the device as presence and/or movement detector.
2 channels for detector application, 1 channel for constant light control and 1 channel for HVAC.
Integrated brightness sensor.
Integrated temperature sensor.
Brightness range: 10 - 3.000 Lux.
Brightness adjustment via KNX communication objects.
Two-stage switch-off with delay time and reduced brightness.
The KNX programming LED can be activated for the walk-test function via KNX.
With integrated KNX bus coupler and power supply via KNX bus.
Easy Master-Slave operation of several presence detectors possible.
Mounting height: 2 m - 4 m.
Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.
Hole size: Ø 68 mm.
Suitable for surface mounting installations in combination with the surface-mounted box 6884-500.
Cannot be installed in British Standard box.
Dimensions: (H x D): 66.5 mm * 105 mm.
Visible height: 44.5 mm.
Mounting depth: 21.5 mm.
Mounting depth (including spring clip): 48.0 mm * 65.0 mm.
Temperature range (device): –20 °C – +45 °C.
Storage temperature range: –20 °C – +70 °C.
Protection class (device): IP 20 (IP54 in combination with 6884-500).
The devices support KNX Data Secure.
Available from November 2025

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	PMB/U3.1-916	2CKA006132A0466			1

BMB/U1.1-916

ABB Presence detector Flat KNX **NEW**

Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular).
Sitting persons Ø: 4.0 m/6.0 m/–.
Frontal walking Ø: 2.0 m/4.0 m/5.0 m.
Lateral walking Ø: 9.0 m/11.0 m/12.0 m.
Sensitivity of the watchdog adjustable via ETS-parameter.
Operating modes: Automatic, Semi-automatic.
For switching on/off light bands depending on the room brightness.
Regulation in response to the movement possible.
Using the device as presence and/or movement detector.
2 channels for detector application, 1 channel for constant light control and 1 channel for HVAC.
Integrated brightness sensor.
Integrated temperature sensor.
Brightness range: 10 - 3.000 Lux.
Brightness adjustment via KNX communication objects.
Two-stage switch-off with delay time and reduced brightness.
The KNX programming LED can be activated for the walk-test function via KNX.
With integrated KNX bus coupler and power supply via KNX bus.
Easy Master-Slave operation of several presence detectors possible.
Mounting height: 2 m - 4 m.
Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.
Hole size: Ø 46 mm.
Cannot be installed in British Standard or VDE mounting box.
Dimensions: (H x D): 37.0 mm * 56.0 mm
Visible height: 1.0 mm.
Mounting depth: 34.5 mm.
Temperature range (device): –20 °C – +45 °C.
Storage temperature range: –20 °C – +70 °C.
Protection class (device): IP 20.
The devices support KNX Data Secure.
Available from November 2025

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	BMB/U1.1-916	2CKA006132A0468			1

ABB i-bus® KNX

Movement and Presence Detection

6131/20-24-500

Presence Detector, Mini, Basic, 8 Meter, FM
Presence detector with 4 individual PIR sensors (single switch-off) and 2 independent channels. Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular). Seated persons Ø: 5 m, 6.5 m and 9 m. Walking persons Ø: 6.5 m, 8 m and 10.5 m.
Sensitivity of the watchdog adjustable via ETS-parameter.
Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application). For switching on/off light bands depending on the room brightness.
Regulation in response to the movement possible.
Using the device as presence and/or movement detector.
2 channels for detector application with integrated monitoring function or up to 2 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area).
Integrated brightness sensor.
Weighting of up to 2 external brightness values and the internal brightness sensor possible.
Brightness range: 1 – 1.000 Lux.
Brightness adjustment via KNX communication objects.
Two-stage switch-off with delay time and reduced brightness.
The KNX programming button is accessible without demounting the detector.
The KNX programming LED can be activated for the walk-test function via KNX.
With integrated KNX bus coupler and power supply via KNX bus.
Scene control via KNX.
Easy Master-Slave operation of several presence detectors possible.
Firmware update via ETS and KNX Firmware Update App.
Mounting height: 2 m - 4 m.
Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.
Hole size: Ø 68 mm.
Suitable for surface mounting installations in combination with the surface-mounted box 6131/29-xxx(-500).
Cannot be installed in British Standard or VDE flush-mounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).
Dimensions (L x W x D): 80 mm x 80 mm x 45 mm.
Visible height: 16 mm.
Mounting depth: 29 mm.
Temperature range (device): –5 °C – +45 °C.
Storage temperature range: –25 °C – +55 °C.
Transport temperature range: –25 °C – +70 °C.
Protection class (device): IP 20.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/20-24-500	2CKA006132A0342		0.13	1
aluminium silver	–	6131/20-183-500	2CKA006132A0343		0.13	1
black matt	–	6131/20-885-500	2CKA006132A0436		0.13	1

6131/21-24-500

Presence Detector, Mini, Premium, 8 Meter, FM
Presence detector with 4 individual PIR sensors (single switch-off) and 4 independent channels. Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular).
Seated persons Ø: 5 m, 6.5 m and 9 m. Walking persons Ø: 6.5 m, 8 m and 10.5 m.
Sensitivity of the watchdog adjustable via ETS-parameter.
Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application). For dimming/control the brightness to a defined value in the detection area.
4 channels for detector application with integrated monitoring function
or up to 4 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area)
or up to 2 channels for constant light control (max. 2 outputs for dimming daylight control/ control of two rooflights in the room)
or up to 1 channel for HVAC functions for controlling heating and/or cooling systems and ventilation systems in the detection area. Integrated brightness sensor.
Weighting of up to 2 external brightness values and the internal brightness sensor possible.
Brightness range: 1 – 1.000 Lux. Brightness adjustment via KNX communication objects.
Two-stage switch-off with delay time and reduced brightness.
Incl. 5 logic functions (logic gates, gates, delay and staircase lighting).
Integrated object room temperature controller with temperature sensor.
The KNX programming button is accessible without demounting the detector.
The KNX programming LED can be activated for the walk-test function via KNX.
With integrated KNX bus coupler and power supply via KNX bus. Scene control via KNX.
Easy Master-Slave operation of several presence detectors possible.
Firmware update via ETS and KNX Firmware Update App.
Integrated IR receiver for activation of the KNX programming mode via the IR remote control 6010-25(-500) (phased-out) and 10 freely programmable IR channels (blue and/or white function buttons). Alternatively via a teachable IR remote control with RC5 code.
Mounting height: 2 m - 4 m.
Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.
Hole size: Ø 68 mm.
Suitable for surface mounting installations in combination with the surface-mounted box 6131/29-xxx(-500).
Cannot be installed in British Standard or VDE flush-mounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).
Dimensions (L x W x D): 80 mm x 80 mm x 45 mm.
Visible height: 16 mm.
Mounting depth: 29 mm.
Temperature range (device): –5 °C – +45 °C.
Storage temperature range: –25 °C – +55 °C.
Transport temperature range: –25 °C – +70 °C.
Protection class (device): IP 20.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/21-24-500	2CKA006132A0344		0.13	1
aluminium silver	–	6131/21-183-500	2CKA006132A0345		0.13	1
black matt	–	6131/21-885-500	2CKA006132A0438		0.13	1

ABB i-bus® KNX

Movement and Presence Detection

6131/30-24-500

Presence Detector, Basic, 12 Meter, FM
Presence detector with 4 individual PIR sensors (single switch-off) and 2 independent channels. Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular).
Seated persons Ø: 8 m, 10 m and 14 m. Walking persons Ø: 10 m, 12 m and 16 m.
Sensitivity of the watchdog adjustable via ETS-parameter.
Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application). For switching on/off light bands depending on the room brightness.
Regulation in response to the movement possible.
Using the device as presence and/or movement detector.
2 channels for detector application with integrated monitoring function
or up to 2 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area).
Integrated brightness sensor.
Weighting of up to 2 external brightness values and the internal brightness sensor possible.
Brightness range: 1 - 1.000 Lux.
Brightness adjustment via KNX communication objects.
Two-stage switch-off with delay time and reduced brightness.
The KNX programming button is accessible without demounting the detector.
The KNX programming LED can be activated for the walk-test function via KNX.
With integrated KNX bus coupler and power supply via KNX bus.
Scene control via KNX.
Easy Master-Slave operation of several presence detectors possible.
Firmware update via ETS and KNX Firmware Update App.
Mounting height: 2 m - 4 m.
Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.
Hole size: Ø 68 mm.
Suitable for surface mounting installations in combination with the surface-mounted box 6131/39-xxx(-500) or intermediate ring for VDE flush-mounted box 6131/38-xxx(-500).
Cannot be installed in British Standard or VDE flush-mounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).
Dimensions (L x W x D): 91 mm x 91 mm x 45 mm.
Visible height: 23 mm.
Mounting depth: 22 mm.
Temperature range (device): –5 °C – +45 °C.
Storage temperature range: –25 °C – +55 °C.
Transport temperature range: –25 °C – +70 °C.
Protection class (device): IP 20.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/30-24-500	2CKA006132A0346		0.15	1
aluminium silver	–	6131/30-183-500	2CKA006132A0347		0.15	1
black matt	–	6131/30-885-500	2CKA006132A0440		0.15	1

6131/31-24-500

Presence Detector, Premium, 12 Meter, FM
Presence detector with 4 individual PIR sensors (single switch-off) and 4 independent channels. Detection range (for mounting height 2.5 m, 3 m and 4 m): 360° (circular).
Seated persons Ø: 8 m, 10 m and 14 m. Walking persons Ø: 10 m, 12 m and 16 m.
Sensitivity of the watchdog adjustable via ETS-parameter.
Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application). For dimming/control the brightness to a defined value in the detection area.
4 channels for detector application with integrated monitoring function
or up to 4 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area)
or up to 2 channels for constant light control (max. 2 outputs for dimming daylight control/ control of two rooflights in the room)
or up to 1 channel for HVAC functions for controlling heating and/or cooling systems and ventilation systems in the detection area.
Integrated brightness sensor.
Weighting of up to 2 external brightness values and the internal brightness sensor possible.
Brightness range: 1 - 1.000 Lux.
Brightness adjustment via KNX communication objects.
Two-stage switch-off with delay time and reduced brightness.
Incl. 5 logic functions (logic gates, gates, delay and staircase lighting).
Integrated object room temperature controller with temperature sensor.
The KNX programming button is accessible without demounting the detector.
The KNX programming LED can be activated for the walk-test function via KNX.
With integrated KNX bus coupler and power supply via KNX bus.
Scene control via KNX.
Easy Master-Slave operation of several presence detectors possible.
Firmware update via ETS and KNX Firmware Update App.
Integrated IR receiver for activation of the KNX programming mode via the IR remote control 6010-25(-500) (phased-out) and 10 freely programmable IR channels (blue and/or white function buttons). Alternatively via a teachable IR remote control with RC5 code.
Mounting height: 2 m - 4 m.
Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.
Hole size: Ø 68 mm.
Suitable for surface mounting installations in combination with the surface-mounted box 6131/39-xxx(-500).
Cannot be installed in British Standard or VDE flush-mounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).
Dimensions (L x W x D): 91 mm x 91 mm x 45 mm.
Visible height: 23 mm.
Mounting depth: 22 mm.
Temperature range (device): –5 °C – +45 °C.
Storage temperature range: –25 °C – +55 °C.
Transport temperature range: –25 °C – +70 °C.
Protection class (device): IP 20.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/31-24-500	2CKA006132A0348		0.15	1
aluminium silver	–	6131/31-183-500	2CKA006132A0349		0.15	1
black matt	–	6131/31-885-500	2CKA006132A0443		0.15	1

ABB i-bus® KNX

Movement and Presence Detection

6131/40-24-500

Movement Detector, Sky, white, FM
Movement detector with 4 individual PIR sensors (single switch-off) and 2 independent channels. Detection range (for mounting height 6 m and 12 m): 360° (circular).
Walking persons Ø: 18 m, 24 m.
Sensitivity of the watchdog adjustable via ETS-parameter.
Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application).
For switching on/off light bands depending on the room brightness.
Regulation in response to the movement possible.
Using the device as presence and/or movement detector.
2 channels for detector application with integrated monitoring function
or up to 2 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area).
Integrated brightness sensor.
Weighting of up to 2 external brightness values and the internal brightness sensor possible.
Brightness range: 1 – 1.000 Lux.
Brightness adjustment via KNX communcation objects.
Two-stage switch-off with delay time and reduced brigthness.
The KNX programming button is accessable without demounting the detector.
The KNX programming LED can be activated for the walk-test function via KNX.
With integrated KNX bus coupler and power supply via KNX bus.
Scene control via KNX.
Easy Master-Slave operation of several presence detectors possible.
Firmware update via ETS and KNX Firmware Update App.
Integrated IR receiver for activation of the KNX programming mode via the IR remote control 6010-25(-500) (phased-out). Alternatively via a teachable IR remote control with RC5 code.
Mounting height: 4 to 12 m.
Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.
Hole size: Ø 68 mm.
Suitable for surface mounting installations in combination with the surface-mounted box 6131/29-xxx(-500) or intermediate ring for VDE flush-mounted box 6131/39-xxx(-500).
Cannot be installed in British Standard or VDE flush-mounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).
Dimensions (L x W x D): 91 mm x 91 mm x 45 mm.
Visible height: 23 mm.
Mounting depth: 22 mm.
Temperature range (device): –5 °C – +45 °C.
Storage temperature range: –25 °C – +55 °C.
Transport temperature range: –25 °C – +70 °C.
Protection class (device): IP 20.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/40-24-500	2CKA006132A0350		0.15	1
black matt	–	6131/40-885-500	2CKA006132A0446		0.15	1

6131/50-24-500

Movement Detector, Corridor, Basic, FM
Movement detector with 2 sensor groups and 2 PIR sensors each (groups single switch-off) and max. 2 independent channels. Detection range: rectangular.
For mounting height 2.5 m: frontal approach max. 18 m x 2.5 m (per side max. 9 m x 2.5 m). Lateral movement max. 24 m x 2.5 m (per side max. 12 m x 2.5 m).
For mounting height 3 m as well as 4 m: frontal approach max. 20 m x 3 m (per side max. 10 m x 3 m). Lateral movement max. 30 m x 3 m (per side max. 15 m x 3 m).
Sensitivity of the watchdog adjustable via ETS-parameter.
Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application).
For switching on/off light bands depending on the room brightness.
Regulation in response to the movement possible.
Using the device as presence and/or movement detector.
2 channels for detector application with integrated monitoring function
or up to 2 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area).
Integrated brightness sensor.
Weighting of up to 2 external brightness values and the internal brightness sensor possible.
Brightness range: 1 – 1.000 Lux.
Brightness adjustment via KNX communication objects.
Two-stage switch-off with delay time and reduced brightness.
The KNX programming button is accessible without demounting the detector.
The KNX programming LED can be activated for the walk-test function via KNX.
With integrated KNX bus coupler and power supply via KNX bus.
Scene control via KNX.
Easy Master-Slave operation of several presence detectors possible.
Firmware update via ETS and KNX Firmware Update App.
Mounting height: 2 m - 4 m.
Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip.
Hole size: Ø 68 mm.
Suitable for surface mounting installations in combination with the surface-mounted box 6131/39-xxx(-500) or intermediate ring for VDE flush-mounted box 6131/38-xxx(-500).
Cannot be installed in British Standard or VDE flush-mounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).
Dimensions (L x W x D): 91 mm x 91 mm x 49 mm.
Visible height: 27 mm.
Mounting depth: 22 mm.
Temperature range (device): –5 °C – +45 °C.
Storage temperature range: –25 °C – +55 °C.
Transport temperature range: –25 °C – +70 °C.
Protection class (device): IP 20.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/50-24-500	2CKA006132A0399		0.16	1
aluminium silver	–	6131/50-183-500	2CKA006132A0400		0.16	1
black matt	–	6131/50-885-500	2CKA006132A0449		0.16	1

ABB i-bus® KNX

Movement and Presence Detection

6131/51-24-500

Movement Detector, Corridor, Premium, FM
Movement detector with 2 sensor groups and 2 PIR sensors each (groups single switch-off) and max. 4 independent channels. Detection range: rectangular.
For mounting height 2.5 m: frontal approach max. 18 m x 2.5 m (per side max. 9 m x 2.5 m). Lateral movement max. 24 m x 2.5 m (per side max. 12 m x 2.5 m).
For mounting height 3 m as well as 4 m: frontal approach max. 20 m x 3 m (per side max. 10 m x 3 m). Lateral movement max. 30 m x 3 m (per side max. 15 m x 3 m).
Sensitivity of the watchdog adjustable via ETS-parameter.
Operating modes: Automatic, Automatic switch-off/switch-on (depending on detector application).
For dimming/control the brightness to a defined value in the detection area.
4 channels for detector application with integrated monitoring function
or up to 4 channels for constant light switch application (max. 2 outputs for brightness dependent switching of two light bands in the area)
or up to 2 channels for constant light control (max. 2 outputs for dimming daylight control/ control of two rooflights in the room)
or up to 1 channel for HVAC functions for controlling heating and/or cooling systems and ventilation systems in the detection area. Integrated brightness sensor.
Weighting of up to 2 external brightness values and the internal brightness sensor possible.
Brightness range: 1 – 1.000 Lux. Brightness adjustment via KNX communcation objects.
Two-stage switch-off with delay time and reduced brigthness.
Incl. 5 logic functions (logic gates, gates, delay and staircase lighting).
Integrated object room temperature controller with temperature sensor.
The KNX programming button is accessable without demounting the detector.
The KNX programming LED can be activated for the walk-test function via KNX.
With integrated KNX bus coupler and power supply via KNX bus.
Scene control via KNX. Easy Master-Slave operation of several presence detectors possible.
Firmware update via ETS and KNX Firmware Update App.
Integrated IR receiver for activation of the KNX programming mode via the IR remote control 6010-25(-500) (phased-out) and 10 freely programmable IR channels (blue and/or white function buttons). Alternatively via a teachable IR remote control with RC5 code.
Mounting height: 2 m - 4 m.
Suitable for false ceilings with a board thickness from 9 to 25 mm in combination with a spring clip. Hole size: Ø 68 mm.
Suitable for surface mounting installations in combination with the surface-mounted box 6131/39-xxx(-500).
Cannot be installed in British Standard or VDE flush-mounted box.
Recommendation: Installation housing from Kaiser HaloX-O (Art.no. 1281-00) with corresponding cover plates (1281-01 or 1281-61 for fair faced concrete) or IBTronic H120-68 from Spelsberg (Art.no. 97600501).
Dimensions (L x W x D): 91 mm x 91 mm x 49 mm.
Visible height: 27 mm.
Mounting depth: 22 mm.
Temperature range (device): –5 °C – +45 °C.
Storage temperature range: –25 °C – +55 °C.
Transport temperature range: –25 °C – +70 °C.
Protection class (device): IP 20.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/51-24-500	2CKA006132A0413		0.16	1
aluminium silver	–	6131/51-183-500	2CKA006132A0414		0.16	1
black matt	–	6131/51-885-500	2CKA006132A0452		0.16	1

6131/29-24-500

Housing Presence Detector, Mini, SM

For installing a Presence Detector Mini Basic KNX 6131/20-xxx(-500) or a Presence Detector Mini Premium KNX 6131/21-xxx(-500).

Protection class (Device): IP 20. Dimensions (L x W x D): 80 mm x 80 mm x 35 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/29-24-500	2CKA006132A0351		0.08	1
aluminium silver	–	6131/29-183-500	2CKA006132A0352		0.08	1
black matt	–	6131/29-885-500	2CKA006132A0454		0.08	1

6131/39-24-500

Housing Presence Detector, SM

For mounting a Presence Detector Basic KNX 6131/30-xxx(-500), a Presence Detector Premium KNX 6131/31-xxx(-500), a Movement Detector Corridor Basic KNX 6131/50-xxx(-500), a Movement Detector Corridor Premium KNX 6131/51-xxx(-500) or a Movement Detector Sky KNX 6131/40-24(-500).

Protection class (Device): IP 20. Dimensions (L x W x D): 91 mm x 91 mm x 33 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/39-24-500	2CKA006132A0353		0.10	1
aluminium silver	–	6131/39-183-500	2CKA006132A0354		0.10	1
black matt	–	6131/39-885-500	2CKA006132A0455		0.10	1

6131/38-24

Intermediate ring for Presence/Movement Detector Basic, Premium, Sky and Corridor

For mounting a Presence Detector Basic KNX 6131/30-xxx(-500), a Presence Detector Premium KNX 6131/31-xxx(-500), a Movement Detector Corridor Basic KNX 6131/50-xxx(-500), a Movement Detector Corridor Premium KNX 6131/51-xxx(-500) or a Movement Detector Sky KNX 6131/40-24(-500).

Protection class (Device): IP 20. Dimensions (L x W x D): 91 mm x 91 mm x 22 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white matt	–	6131/38-24-500	2CKA006132A0403		0.08	1
aluminium silver	–	6131/38-183-500	2CKA006132A0404		0.08	1
black matt	–	6131/38-885-500	2CKA006132A0459		0.08	1

ABB i-bus® KNX

Movement and Presence Detection

BM/A4.1-135

Busch-Watchdog PRO 280° KNX **NEW**

4 channel KNX movement detector for indoor and outdoor area. For automatic switching of ABB-i-bus KNX® actuators dependent on movement and brightness.
With 1 twilight/brightness channel with 3 switching thresholds.
With 1 temperature channel with three switching thresholds.
Remote operation via the Bluetooth and smartphone/tablet app.
Up to 10 KNX functions controllable via app. Programmable status RGB LED (5 functions).
With high-quality lens for optimum detection. Level balancing of the device +/–30°.
Horizonatal orientation of the optical system +90°/–60°. Vertical orientation of the optical system +30°/–30°. With ground and rear-field detection. Additional possibility for switch-on via push-button object. The bus can be connected via enclosed terminal block.
Optional: ABB-free@home® app for commissioning of basic and add-on parameters: Switch-off time, Brightness Threshold, Continuously on and Continuously off. Programming only under connected bus voltage. With integrated dismounting protection. Individual adjustment of detection range via enclosed protective foil which can be cut to size.
With brightness-independent test mode for evaluating the detection zone.
Switch-off delay: 10 sec to 18 hours.
Adjustment of parameters via App: Switch-on brightness, Switch-off delay, permanent on, permanent off. Measurement of outdoor temperature and ambient brightness level at the device. Native ETS application required.
With automatic range stabilization. With automatic interference suppression.
With automatic dazzle-proofing. With 4 movement channels.
Surveillance density: 106 sectors with 424 switching segments.
Detection area: frontal: 16 m, lateral: 16 m.
Installation height: 2.5 m.
Twilight limiting values: 1 – 1.000 Lux.
Brightness limiting values: 1.000 – 80.000.
Sensor angle: 280°. Number of PIR: 4.
Bus voltage: 24 V.
With integrated KNX bus coupler.
No additional power supply necessary.
Power consumption: 0.3 W.
Current: 12 mA.
Protection class device: IP 55.
Temperature range device: –25 °C – +55 °C.
Storage temperature device: –25 °C – +70 °C.
Dimensions (H x W x D): 124 mm x 110 mm x 158 mm.
The devices support KNX Data Secure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
brown	–	BM/A4.1-131	2CKA006132A0425		0.385	1
aluminium silver	–	BM/A4.1-133	2CKA006132A0426		0.385	1
studio white	–	BM/A4.1-134	2CKA006132A0427		0.385	1
anthracite	–	BM/A4.1-135	2CKA006132A0428		0.385	1
stainless steel	–	BM/A4.1-136	2CKA006132A0429		0.385	1

6851/EA-135-500

Busch-Watchdog PRO Corner adapter **NEW**

For detection on two sides of the house, in combination with Busch-Watchdog® PRO 280. It is mounted at the corner of the house, on the wall. For flush or surface cable entries.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
brown	–	6851/EA-131-500	2CKA006800A3084		0.385	1
aluminium silver	–	6851/EA-133-500	2CKA006800A3086		0.385	1
studio white	–	6851/EA-134-500	2CKA006800A3088		0.385	1
anthracite	–	6851/EA-135-500	2CKA006800A3090		0.385	1
stainless steel	–	6851/EA-136-500	2CKA006800A3092		0.385	1

6851/DR-135-500

Busch-Watchdog PRO Design Frame **NEW**

Design frame for square and cubic design. For combination with all devices of Busch-Watchdog® PRO series. After wall mounted installation of the detector, the design frame could be putted over the Watchdog.
The design frame is fixed via Snap-On mechanism. Optional accessories. Retrofit installation possible.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
brown	–	6851/DR-131-500	2CKA006800A3094		0.385	1
aluminium silver	–	6851/DR-133-500	2CKA006800A3096		0.385	1
studio white	–	6851/DR-134-500	2CKA006800A3098		0.385	1
anthracite	–	6851/DR-135-500	2CKA006800A3100		0.385	1
stainless steel	–	6851/DR-136-500	2CKA006800A3102		0.385	1

Efficient climate control in one system

Product range for HVAC automation

Heating, ventilation, and air-conditioning automation – ClimaECO brings HVAC applications together in one holistic solution portfolio based on the standardized KNX system.

—
When it comes to HVAC you often have to deal with several systems. ABB ClimaECO offers one solution for everything.

HVAC control in one single system
ClimaECO is the holistic heating, ventilation, and air-conditioning (HVAC) automation solution for commercial buildings based on the proven ABB i-bus® KNX system. A solution that seamlessly integrates room automation, central HVAC functions, and management and automation into one system – a significant step towards increasing energy efficiency and reducing operational costs. ClimaECO – making your building more economical, sustainable, and comfortable.

HVAC automation from the room level to the management level

HVAC –
multiple functions

Heating, ventilation, and air-conditioning technology is made up of various systems that are now integrated into one system.

KNX –
a standardized system

With the proven ABB i-bus® KNX system it is possible to automate all HVAC applications and combine them into a single solution.

HVAC –
levels

ClimaECO combines the three different levels of HVAC automation, ranging from management level to central HVAC systems (generation and distribution) to room automation (energy consumption).

ClimaECO –
a holistic solution

ClimaECO bundles all functions and solutions for HVAC automation into a single integrated system. This saves you time and effort with planning, integration, and maintenance, while significantly increasing energy efficiency in buildings.

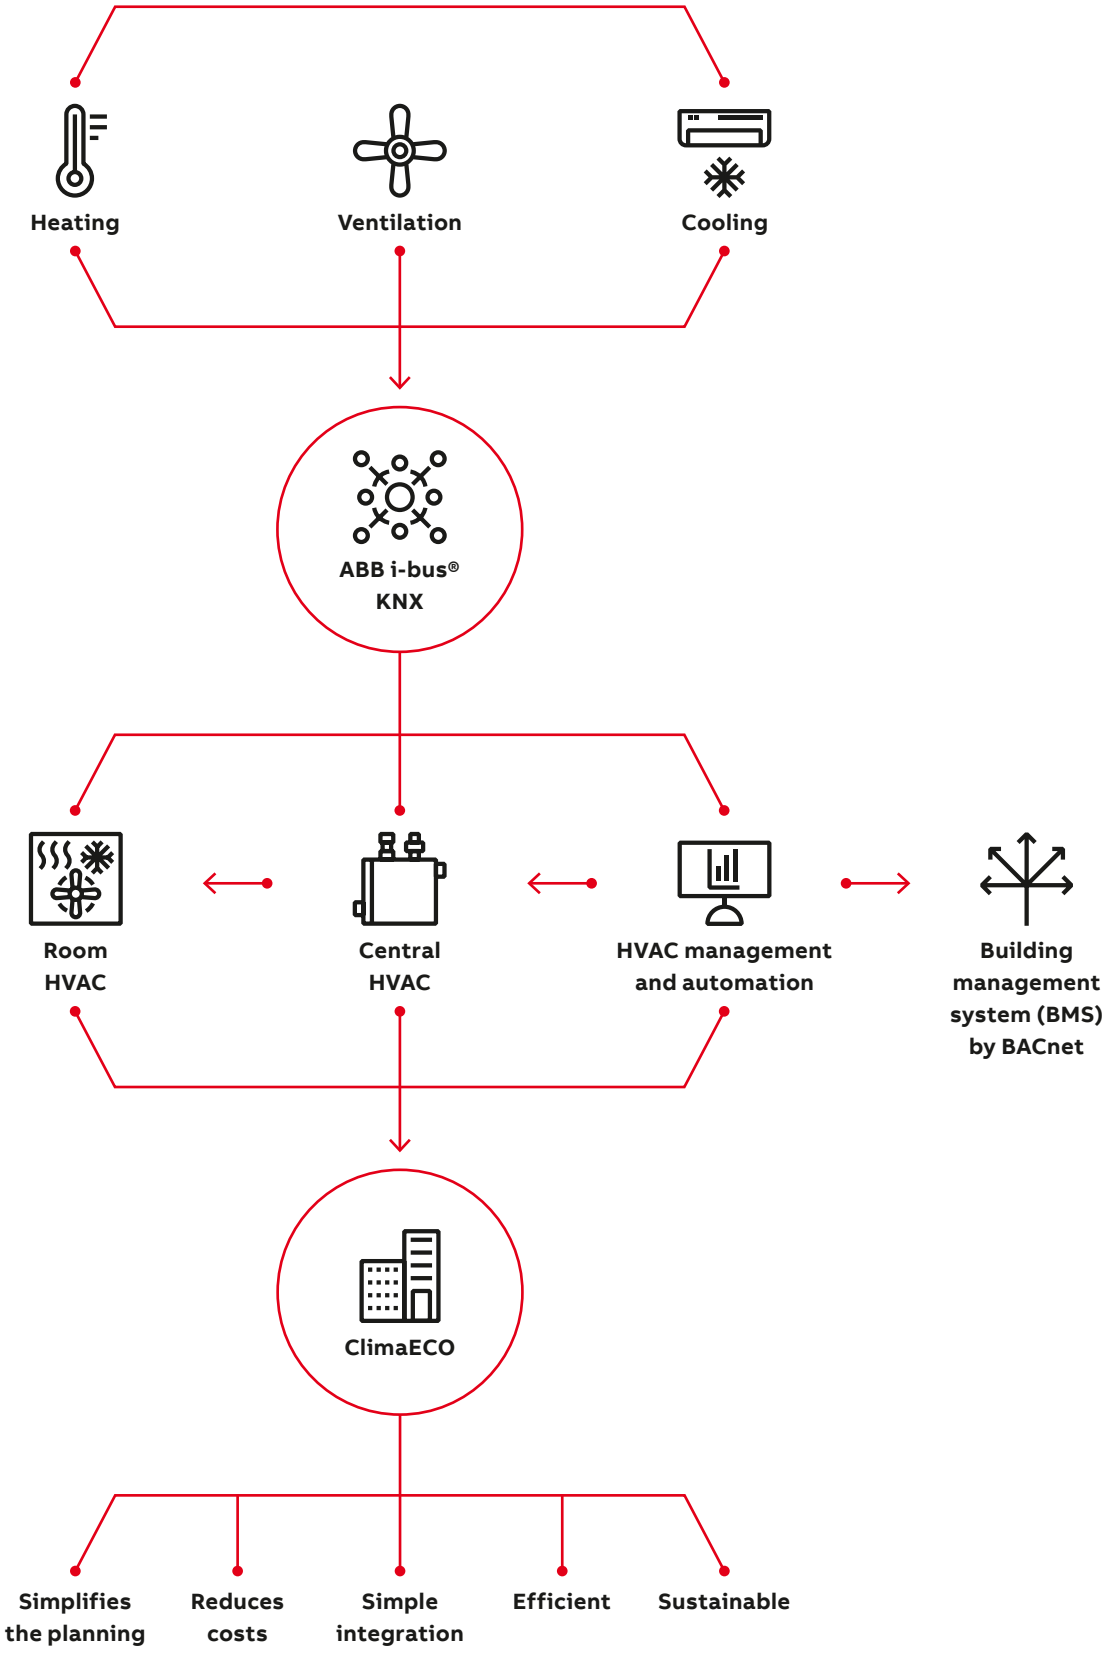

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning – Influencing Variables on Room Climate

Influencing Variables on Room Temperature

Internal and external factors have an effect on the thermal conditions in a room or a building. As an external factor the solar radiation is important for the indoor temperature – particularly with regard to modern architecture with glass fronts. Besides this, the room temperature is strongly affected by the exchange of thermal energy through windows and walls as well as the loss of thermal energy through open doors and windows.

Depending on the intensity, all this interactions influence also the energy efficiency of a building and have therefore to be optimised.
Internal thermal inputs from lighting, devices or persons have also an influence on the room climate. By planning a heating, ventilation or air conditioning system all this internal and external factors have to be considered.

Influencing Variables on Air Quality

The indoor climate in living and working areas has a scientifically proven impact on health, job performance and well-being of people. A suitable indicator for determination of the room air quality is the CO_2 concentration. In addition the values for room temperature and air humidity must be controlled to meet the requirements for a comfortable room climate.

Studies have shown, that high CO_2 concentration in the air influences the well-being as well as the performance and learning ability of people. Besides the normal CO_2 concentration in the air, human respiration is an important factor increasing the CO_2 concentration in a room. Therefore it is important to measure the CO_2 concentration in rooms where many persons are present (schools, conference rooms, open-plan offices). Monitoring of thresholds enables fans to be switched via ABB i-bus® KNX allowing automatic control of the CO_2 concentration and sufficient supply of fresh air.

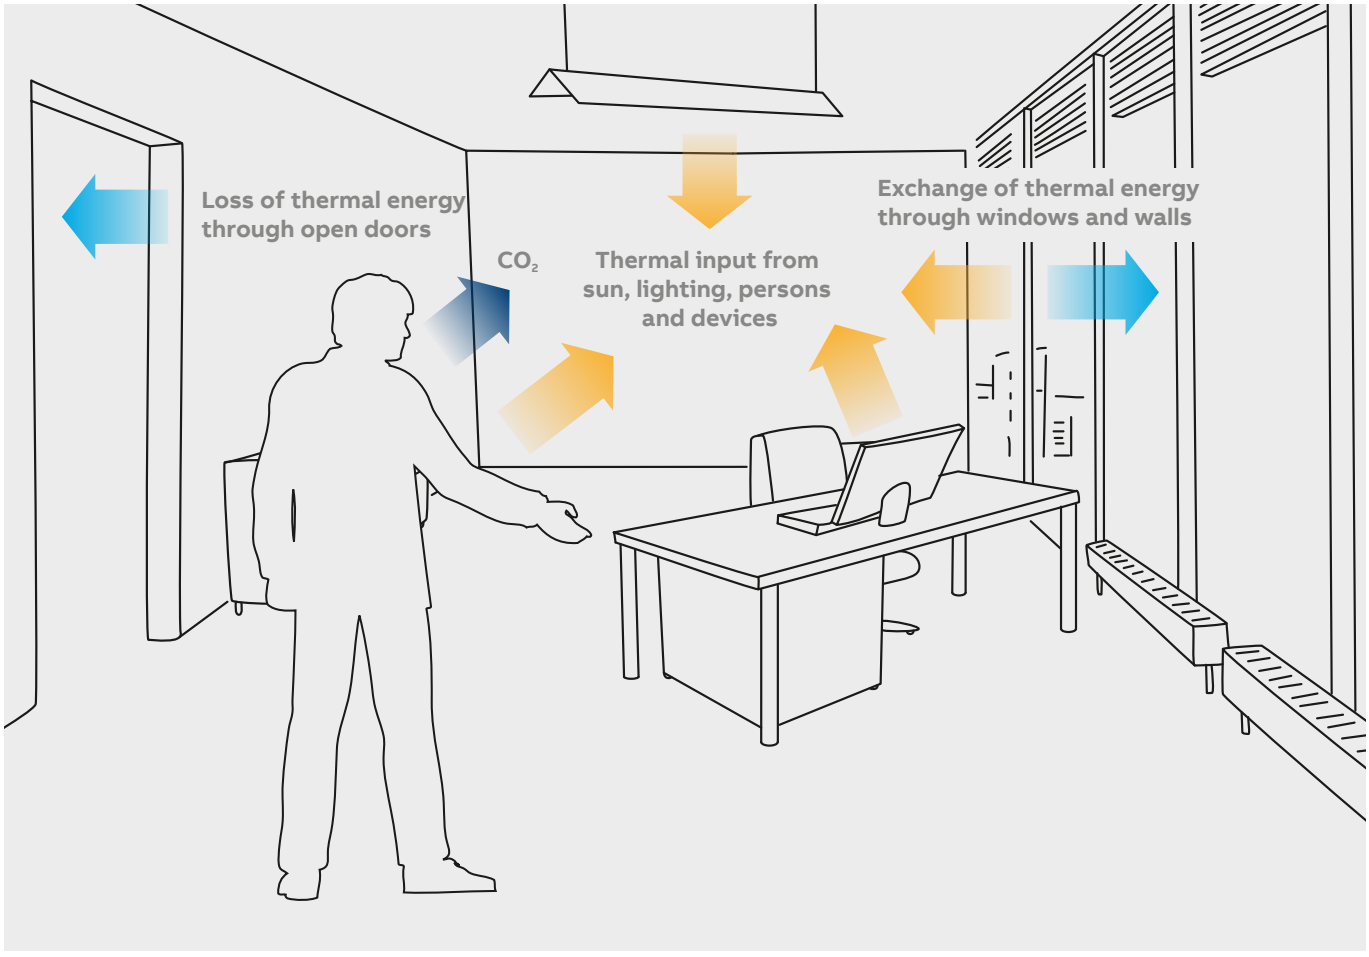

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning –
ClimaECO Portfolio Overview

Management & Automation

Application Controllers
AC/S

Central HVAC Automation

Heating/Cooling Circuit Controllers
HCC/S

Boiler/Chiller Interfaces
BCI/S

Building Automation Controller KNX
AC500

HVAC Room Automation

User Operation

ABB Tenton®
SBS/U

Room Control Units
SAR/A

Controllers

Fan Coil Controllers
FCC/S

Valve Drive Controllers
VC/S

Split Unit Gateway
SUG/U

Air quality sensor
LGS/A

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

	Electronic Relay ER/U 1.1 (with US/U 12.2) (x = 2/4)	Valve Drive Actuator VAA/S x.230.2.1 (x = 6/12)	Valve Drive Controller VC/S 4.1.1	Valve Drive Controller VC/S 4.2.1	Valve Drive Controller VC/S x.2.2.2 (x = 6/12)
General					
Supply voltage	24...250 V AC/DC	KNX	KNX	KNX	KNX
Type of installation	Flush-mounted	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	–	4/8	8	8	4/8
Current consumption, bus	< 12 mA	< 12 mA	< 12 mA	< 12 mA	< 12 mA
Rated current (per channel)	0.5 A (resistive load)	160 mA (resistive load)	250 mA	250 mA	250 mA
Inrush current (per channel)	1.2 A (1 min.)	300 mA (2 min., Tu = 60 °C)	300 mA (2 min., Tu = 60 °C)	300 mA (2 min., Tu = 60 °C)	≤ 1,3 A for 10 s (45 °C) per output pair
Maximum number of thermoelectric valve drives (per channel)	2 (230 V) 2 (24 V)	3 (230 V) 1 (24 V)	3 (230 V) 1 (24 V)	3 (230 V) 1 (24 V)	6 (230 V) 3 (24 V) per output pair
Outputs					
Number	1	6/12	4	4	6/12
Type	thermoelectric/ 2-point valve drive	thermoelectric/ 2-point valve drive	thermoelectric/ 2-point valve drive	thermoelectric/ 2-point valve drive	thermoelectric/ 2-point valve drive
Output voltage	24... 230 V AC/DC	24...230 V AC	24...230 V AC	24...230 V AC	24...230 V AC
Manual operation					
Manual operation	–	■	–	■	■
Fault acknowledgement	–	■	–	■	■
Function					
KNX Data Secure	–	–	–	–	■
Forced operation	■ (via US/U 12.2)	■	■	■	■
Status	–	■	■	■	■
Adjustable control value after controller fault	■ (via US/U 12.2)	■	■	■	■
Valve purge	■ (via US/U 12.2)	■	■	■	■
Characteristic curve adaption	–	■	–	–	–
Blocking	–	■	–	–	–
Pump control without parentesis (logic)	–	–	–	–	■
Service mode	–	–	–	–	■
Highest control value	–	–	–	–	■
Safety settings	–	–	–	–	■
Integrated room temperature controller (RTC)	–	–	■	■	■
Use in Master/Slave system with room operation units	–	–	■	■	■
Logic and Threshold	–	–	–	–	■
Control and diagnosis via ABB i-bus® Tool	–	–	■	■	■ [1]

■ = Function is supported

– = Function is not supported

1) from version 1.1

VC/S 4.1.1

Valve Drive Controller, 4-fold, MDRC

For the control of heating and cooling applications in the room, such as radiator, floor heating or cooling ceiling. The device has 4 channels each for the independent control of a heating or cooling application. Each channel has an electronic valve output for the control of a thermoelectric valve drive, as well as 3 inputs to detect and monitor the room status (use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of each channel. Each channel has its own integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device. The VC/S 4.2.1 features an easy to use manual operation.
Both devices support the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	8	VC/S 4.1.1	2CDG110216R0011		0.27	1
Manual Operation	8	VC/S 4.2.1	2CDG110217R0011		0.275	1

VC/S 6.2.2.2

Valve Drive Controller, Manual Operation, MDRC **NEW**

For the control of heating and cooling applications within a room, such as radiators, floor heating, or cooling ceilings. Each device features multiple channels, each equipped with its own electronic valve output for controlling thermoelectric valve drives (e.g., TSA/K) operating at 24...230 V AC. The outputs are protected against short circuits and overload.
Control of the valve outputs can be achieved through either an internal or an external room temperature controller. Push buttons are located at the front of the device to control the outputs, e.g., during commissioning. The current status of the output is displayed via LEDs if the output is selected. The devices support KNX Data Secure.
Available from November 2025

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
6-fold	4	VC/S 6.2.2.2	2CDG110330R0011			1
12-fold	8	VC/S 12.2.2.2	2CDG110331R0011			1

VAA/S 6.230.2.1

Valve Drive Actuator, 230 V, MDRC **To be discontinued**

For controlling thermoelectric valve drives (e.g. TSA/K) in heating/cooling systems at 24...230 V AC. The outputs are protected against short circuits and overload and can be switched on or off via manual push buttons during commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
6-fold	4	VAA/S 6.230.2.1	2CDG110116R0011		0.17	1
12-fold	8	VAA/S 12.230.2.1	2CDG110117R0011		0.3	1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

VAA/A 6.24.2

Floor heating Controller, 6-fold, SM

For the control of up to twelve thermoelectric 24 V DC or analog 0-10 V valve drives (two per channel). With integrated power supply for the valve drives. The device has an integrated relay output to switch the heating circuit pump in dependence of the control value of the valve outputs. The valve outputs can be controlled by the internal or an external room temperature controller. The device is suitable for the installation in the (floor) heating distribution system.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	VAA/A 6.24.2	2CDG120061R0011		0.5	1

ER/U 1.1

Electronic Relay, 1-fold, FM

To be discontinued

The device is used in combination with the universal interface US/U 12.2 and a room thermostat to control the temperature in individual rooms. The thermal valve drives of the radiator valves are operated both noisefree and with a low rate of wear.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	ER/U 1.1	GHQ6310044R0111		0.08	1
12-fold	–	US/U 12.2	2CDG110065R0011		0.06	1

ST/K 1.2

Electromotor Valve Drive

The Electromotor Valve Drive KNX ST/K 1.2 provides precise control for heating and cooling valves, ensuring secure communication through KNX Data Secure. It is equipped with an integrated temperature sensor and an integrated room temperature controller. It delivers a high actuating force of up to 220 N and a maximum valve stroke of 8 mm. It features 2 universal binary inputs, supporting connection options such as window contacts, presence detectors, and push-buttons. The second input also supports external temperature sensors. Additionally, the drive includes automatic valve adaptation and is compatible with a wide range of valve adapters, making it universally applicable. 2 adapters for the most common valves (M30x1.5 and Danfoss RA -VA 10 & VA 100-) are supplied.
The Bus Coupler is integrated. The device can be used in the heating circuit distributor.
The actual valve position can be indicated by 5 LEDs.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	ST/K 1.2	2CDG120092R0011		0.02	1

TSA/K 230.2

Thermoelectric Valve Drives

For opening and closing valves in heating, ventilation and air-conditioning systems.
Both variants (230 V and 24 V) feature a plug-in connection cable (1 m) and a splash-proof housing. The mounting on the valve is easily implemented using the Valve Adapter VA/Z xx.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
230 V	–	TSA/K 230.2	2CDG120049R0011		0.16	1
24 V	–	TSA/K 24.2	2CDG120050R0011		0.16	1
Valve Adapter for valves from Dumser, Chronatherm, Vescal, KaMo	–	VA/Z 10.1	2CDG120009R0011		0.06	1
Valve Adapter for valves from Honeywell, Reich, Cazzaniga, Landis & Gyr. MNG	–	VA/Z 50.1	2CDG120010R0011		0.05	1
Valve Adapter for valves from Danfoss RA	–	VA/Z 78.1	2CDG120011R0011		0.03	1
Valve Adapter for valves from Heimeier, Herb, Onda, Schlösser (ab 93), Oventrop	–	VA/Z 80.1	2CDG120012R0011		0.06	1

SUG/U 1.1

Split Unit Gateway, FM

The Split Unit Gateway forms the interface between the KNX system and many manufacturers' air conditioners, so-called split units. The device converts the KNX telegrams into infrared commands and transmits them to the split unit. The transmitter of the supplied cable is bonded directly onto the split unit's receiver. The split unit then no longer receives the commands from a remote control. Instead, it can be operated via any KNX sensors or via a visual display system. The device is put into operation with the ETS, and a free ETS app is available to select the split unit model. Auxiliary voltage is not required.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SUG/U 1.1	2CDG110207R0011		0.02	1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

	Fan Coil Controller				
	FCC/S 1.1.1.1	**FCC/S 1.1.2.1**	**FCC/S 1.2.1.1**	**FCC/S 1.2.2.1**	**FCC/S 1.3.1.1**
General					
Supply voltage	KNX	KNX	KNX	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	6	6	6	6	6
Current consumption, bus	< 12 mA	< 12 mA	< 12 mA	< 12 mA	< 12 mA
Manual operation	–	■	–	■	–
Software functionality					
Integrarted room temperature controller (RTC)	■	■	■	■	■
Use in Master/Slave System with room operation units	■	■	■	■	■
Fan outputs					
Number of fans	1	1	1	1	1
Fan type:					
1/2/3 step	■	■	■	■	–
Rated current I_n	5 A	5 A	5 A	5 A	–
Rated voltage U_n (50/60 Hz)	250 V AC	250 V AC	250 V AC	250 V AC	–
Continues Fan (0 ... 10 V)	–	–	–	–	■
Valve outputs					
Electronic 0,5 A	2	2	–	–	–
Analog 0...10 V	–	–	2	2	2
Control individual	■	■	■	■	■
Supported valve types:					
– Thermoelectric valve drive (PWM)	2	2	–	–	–
– Motor-driven valve drive (3-point)	1	1	–	–	–
– Analog valve drive or	–	–	2	2	2
– 6-way valve drive	–	–	1	1	1
Switching contact					
Number of contacts	1	1	1	1	1
Rated current I_n	16 A	16 A	16 A	16 A	16 A
Rated voltage U_n (50/60 Hz)	250 V AC	250 V AC	250 V AC	250 V AC	250 V AC
Inputs					
Number of inputs	4	4	4	4	4
Supported sensors:					
– Temperature sensor	■	■	■	■	■
– Dew Point sensor	■	■	■	■	■
– Level sensor	■	■	■	■	■
– Binary signal input	■	■	■	■	■
– Analog room control unit (SAR/A or SAF/A)	1	1	1	1	1
Fan Coil Unit type					
2 pipe					
Heating	■	■	■	■	■
Cooling	■	■	■	■	■
Heating/Cooling	■	■	■	■	■
4 pipe					
Heating/Cooling	■	■	■	■	■
Commissioning and diagnostic function					
Control and diagnosis via ABB i-bus® Tool	■	■	■	■	■

■ = Function is supported

– = Function is not supported

	Fan Coil Controller			
	FCC/S 1.3.2.1	**FCC/S 1.4.1.1**	**FCC/S 1.5.1.1**	**FCC/S 1.5.2.1**
General				
Supply voltage	KNX	KNX	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	6	6	6	6
Current consumption, bus	< 12 mA	< 12 mA	< 12 mA	< 12 mA
Manual operation	■	–	–	■
Software functionality				
Integrarted room temperature controller (RTC)	■	■	■	■
Use in Master/Slave System with room operation units	■	■	■	■
Fan outputs				
Number of fans	1	1	1	1
Fan type:				
1/2/3 step	–	■	–	–
Rated current I_n	–	5 A	–	–
Rated voltage U_n (50/60 Hz)	–	250 V AC	–	–
Continues Fan (0 … 10 V)	■	–	■	■
Valve outputs				
Electronic 0,5 A	–	1	2	2
Analog 0...10 V	2	–	–	–
Control individual	■	■	■	■
Supported valve types:				
– Thermoelectric valve drive (PWM)	–	1	2	2
– Motor-driven valve drive (3-point)	–	–	1	1
– Analog valve drive or	2	–	–	–
– 6-way valve drive	1	–	–	–
Switching contact				
Number of contacts	1	–	1	1
Rated current I_n	16 A	–	16 A	16 A
Rated voltage U_n (50/60 Hz)	250 V AC	–	250 V AC	250 V AC
Inputs				
Number of inputs	4	4	4	4
Supported sensors:				
– Temperature sensor	■	■	■	■
– Dew Point sensor	■	■	■	■
– Level sensor	■	■	■	■
– Binary signal input	■	■	■	■
– Analog room control unit (SAR/A or SAF/A)	1	1	1	1
Fan Coil Unit type				
2 pipe				
Heating	■	■	■	■
Cooling	■	■	■	■
Heating/Cooling	■	■	■	■
4 pipe				
Heating/Cooling	■	–	■	■
Commissioning and diagnostic function				
Control and diagnosis via ABB i-bus® Tool	■	■	■	■

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

	Blower Actuators	
	FCL/S 1.6.1.1	**FCL/S 2.6.1.1**
General		
Supply voltage	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail
Module width (18 mm)	4	6
Current consumption, bus	< 12 mA	< 12 mA
Manual operation	–	–
Fan outputs		
Number of fans	1	2*
Supported fan types:		
– 1/2/3 step or	■	■
– 3 individual contacts	–	–
Rated current I_n	6 A	6 A
Rated voltage U_n	250/440 V AC (50/60 Hz)	250/440 V AC (50/60 Hz)
Valve outputs		
Electronic 0.5 A	–	–
Analog 0...10 V	–	–
Control individual	–	–
Supported valve types:		
– Thermoelectric valve drive (PWM)	–	–
– Motor-driven valve drive (3-point)	–	–
– Analog valve drive	–	–
Valve type can be mixed	–	–
Switching contact		
Number of contacts	1	2 (5)*
Rated current I_n	6 A	6 A
Rated voltage U_n	250/440 V AC (50/60 Hz)	250/440 V AC (50/60 Hz)
Inputs		
Number of inputs	–	–
Supported sensors:		
– Switch sensor	–	–
– Value/forced operation	–	–
– Temperature sensor	–	–
Fan Coil Unit type		
2 pipe		
Heating	–	–
Cooling	–	–
Heating/Cooling	–	–
4 pipe		
Heating/Cooling	–	–
Various		
Parallel operation	–	–
Commissioning and diagnostic function		
Control and diagnosis via ABB i-bus® Tool	–	–

■ = Function is supported

– = Function is not supported

* = Second fan output can be used as 3 switch outputs

FCC/S 1.1.1.1

Fan Coil Controller, 2 x PWM, 3-stage, MDRC

For the control of fan coil units. Via two electronic outputs, two thermoelectric or one motor-driven valve drive can be controlled for heating and cooling. For the fan control the devices features three relay outputs. A relay output switches an additional load of up to 16 A, such as auxiliary heating. Over 4 inputs the room status can be detected and monitored (Use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of the device.
The device has an integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device. The FCC/S 1.1.2.1 features an easy to use manual operation.
Both devices support the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	FCC/S 1.1.1.1	2CDG110210R0011		0.28	1
Manual Operation	6	FCC/S 1.1.2.1	2CDG110211R0011		0.285	1

FCC/S 1.2.2.1

Fan Coil Controller, 2 x 0-10 V, 3-stage, MDRC

For the control of fan coil units. Via two analog outputs, two analog valves or one 6-way valve drive can be controlled for heating and cooling. For the fan control the devices features three relay outputs. A relay output switches an additional load of up to 16 A, such as auxiliary heating. Over 4 inputs the room status can be detected and monitored (Use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of the device. The device has an integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device. The FCC/S 1.2.2.1 features an easy to use manual operation.
Both devices support the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	FCC/S 1.2.1.1	2CDG110212R0011		0.23	1
Manual Operation	6	FCC/S 1.2.2.1	2CDG110213R0011		0.235	1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

FCC/S 1.3.1.1

Fan Coil Controller, 3 x 0-10 V, MDRC

For the control of fan coil units. Via two analog outputs, two analog valves or one 6-way valve drive can be controlled for heating and cooling. For the fan control the devices features an analog output for the control of a continues fan. A relay output switches an additional load of up to 16 A, such as auxiliary heating. Over 4 inputs the room status can be detected and monitored (Use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of the device. The device has an integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device.
The FCC/S 1.3.2.1 features an easy to use manual operation.
Both devices support the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	FCC/S 1.3.1.1	2CDG110214R0011		0.21	1
Manual Operation	6	FCC/S 1.3.2.1	2CDG110215R0011		0.215	1

FCC/S 1.4.1.1

Fan Coil Controller, PWM, 3-stage, MDRC

For the control of fan coil units. Via one electronic output, a thermoelectric valve drive can be controlled for heating and cooling. For the fan control the devices features three relay outputs. Over 4 inputs the room status can be detected and monitored (Use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of the device. The device has an integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device.
The device supports the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	FCC/S 1.4.1.1	2CDG110209R0011		0.215	1

FCC/S 1.5.2.1

Fan Coil Controller, 2 x PWM, 0-10 V, MDRC

For the control of fan coil units. Via two electronic outputs, two thermoelectric or one motor-driven valve drive can be controlled for heating and cooling. For the fan control the devices features an analog output for the control of a continues fan. A relay output switches an additional load of up to 16 A, such as auxiliary heating. Over 4 inputs the room status can be detected and monitored (Use for window contact, dew point sensor, level sensor or temperature sensor). Also it is possible to connect one analog room control unit (SAR/A or SAF/A) to the inputs of the device. The device has an integrated room temperature controller for the control of the room temperature, which can be used directly to control the outputs of the device. The FCC/S 1.5.2.1 features an easy to use manual operation.
Both devices support the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	FCC/S 1.5.1.1	2CDG110234R0011		0.21	1
Manual Operation	6	FCC/S 1.5.2.1	2CDG110235R0011		0.215	1

CAR/U 4.1.1.1-71

Room Temperature Controller Fan Coil, 2/4 pipe, On/Off, FM

ABB Caldion® Room Temperature Controller for fan coil units with 2 pipe, 2 pipe with electric heater or 4 pipe system, Flush Mounted, BS standard. Available for standalone function or as KNX device with integrated bus coupling unit. Build in temperature sensor, 2 x binary input for window, dewpoint, condensate alarm. Integrated actuator output control for on/off valve and 3 x fan speed control. Dedicated capacitive touch RTC control button for intuitive control, mode operation and frameless design with large display.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
black	–	CAR/U 4.1.1.1-71	2TAZ740010R2001		0.272	1
white	–	CAR/U 4.1.1.1-84	2TAZ740010R0001		0.272	1

CAR/U 4.2.1.1-71

Room Temperature Controller Fan Coil, 2/4 pipe, 0-10V, FM

ABB Caldion® Room Temperature Controller for fan coil units with 2 pipe, 2 pipe with electric heater or 4 pipe system, Flush Mounted, BS standard. Available for standalone function or as KNX device with integrated bus coupling unit. Build in temperature sensor, 2 x binary input for window, dewpoint, condensate alarm. Integrated actuator output control for 0-10V valve and 3 x fan speed control. Dedicated capacitive touch RTC control button for intuitive control, mode operation and frameless design with large display.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
black	–	CAR/U 4.2.1.1-71	2TAZ741010R2001		0.272	1
white	–	CAR/U 4.2.1.1-84	2TAZ741010R0001		0.272	1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

FCL/S 2.6.1.1

Blower Actuator, 6 A, MDRC

Controls one blower or fan with up to three fan speeds via step or changeover control. Furthermore a additional equipment like a damper or valve can be switched by one floating output. The fan speed can be directly choosen, increased and decreased as well as controlled by the control value of a external closed-loop controller.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold	4	FCL/S 1.6.1.1	2CDG110163R0011		0.18	1
2-fold	6	FCL/S 2.6.1.1	2CDG110164R0011		0.26	1

SAF/A 1.0.1-24

Room Temperature and Fan Coil Control Element, SM

The control element is used in conjunction with the FCC/S Fan Coil Controller or the VC/S Valve Controller for temperature adjustment, measurement and fan speed adjustment.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SAF/A 1.0.1-24	2CKA006134A0348			1

SAR/A 1.0.1-24

Room Temperature Control Element, SM

The control element is used in conjunction with the FCC/S Fan Coil Controller or the VC/S Valve Controller for temperature adjustment and measurement.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SAR/A 1.0.1-24	2CKA006134A0346			1

6138/11-84-500

Room Thermostat Fan Coil with Display, SM

Sends control values for the room to the Fan Coil Actuators or devices with the respective outputs (e.g. Room Master). The intuitive control operation allows each user to individually set the room temperature and the fan speed. The large LC display can display the actual and target temperatures, the current operating mode as well as the fan speeds. With integrated Bus Coupler.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
aluminium silver	–	6138/11-83-500	2CKA006138A0005		0.092	1
davos/studio white	–	6138/11-84-500	2CKA006138A0003		0.092	1

LGS/A 1.2

Air Quality Sensor with Room Temperature Controller, SM

For the control and measuring of the room air quality and temperature. Accurately measures the $C0_2$ concentration (390…10.000 ppm), humidity (0...100 %) and temperature (0…+50 °C) in a room and sends the values on the bus. By using the integrated thresholds the measured values can be monitored. With the integrated controller it is possible to control the room temperature and HVAC actuators. With integrated Bus Coupler.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	LGS/A 1.2	2CDG120059R0011		0.06	1

AC/S 1.1.1

Application Controller, MDRC

The AC/S Application Controller has predefined Automation Modules for a holistic HVAC Automation Solution from Central HVAC to Room Automation. For example Schedule, Set Point Calculation, Heat Curve Calculation, Data Logging and Device Monitoring. Furthermore own Automation Modules can be created by a graphical Logic Editor. By a web based User Interface the whole system can be monitored and managed.
The AC/S 1.2.1 has additional a built in bidirectional KNX-BACnet/IP Gateway (Server) for data exchange with superordinate Building Management Systems.
The Engineering is done completely by the ETS. An additional external Software is not required. The device has a KNX TP port.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Basic	4	AC/S 1.1.1	2CDG110205R0011		0.19	1
BACnet	4	AC/S 1.2.1	2CDG110206R0011		0.19	1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

	Heating/Cooling Circuit Controller HCC/S 2.1.x.1	Heating/Cooling Circuit Controller HCC/S 2.2.x.1
General		
Supply voltage	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail
Module width (17.5 mm)	8	8
Number of channels	2	2
Outputs		
3- way mixing valve control type	0 … 10 V DC	3 – Point
Valve outputs per channel	1	1
Pump control output per channel	1 (5 A)	1 (5 A)
Inputs		
Input for flow temperature measurement per channel	1	1
Input for return flow temperature measurement per channel	1	1
Inputs for pump status monitoring (pump status, pump failure, pump repair mode) per channel	3	3
Manual operation		
Manual operation	HCC/S 2.1.2.1	HCC/S 2.2.2.1
Software functionality		
Integrated temperature controller for heating or cooling distribution circuits	■	■
Forced operation	■	■
Cyclical monitoring of input values	■	■
Flow temperature limitation	■	■
Safety shutdown temperature	■	■
Manual valve overwrite	■	■
Valve purge	■	■
Manual pump overwrite	■	■
Pump control in dependence of control value	■	■
Channel bundling for double pump systems	■	■

■ = Function is supported

– = Function is not supported

HCC/S 2.1.2.1

Heating/Cooling Circuit Controller, 2-fold, 0-10 V, MDRC

For the control of heating or cooling circuits. The device has 2 channels, each with an analog output to control the mixing valve (0…10 V) of a heating or cooling circuit as well as a relay output (5 A) to switch the pump of the circuit. Via 3 binary inputs it is possible to monitor the status of the pump (via potential free contacts) and integrate these feedback into the control of the pump. The flow and return flow temperature are measured and used for the calculation of the control value for the valve output in the integrated controller. The set point temperature is received via the KNX bus. By bundling both channels of the device it is also possible to use it for double pump systems.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	HCC/S 2.1.1.1	2CDG110218R0011		0.28	1
Manual Operation	6	HCC/S 2.1.2.1	2CDG110219R0011		0.285	1

HCC/S 2.2.1.1

Heating/Cooling Circuit Controller, 2-fold, 3-point, MDRC

For the control of heating or cooling circuits. The device has 2 channels, each with two electronic outputs to control a motor-driven mixing valve (3-Point) of a heating or cooling circuit as well as a relay output (5 A) to switch the pump of the circuit. Via 3 binary inputs it is possible to monitor the status of the pump (via potential free contacts) and integrate these feedback into the control of the pump. The flow and return flow temperature are measured and used for the calculation of the control value for the valve output in the integrated controller. The set point temperature is received via the KNX bus. By bundling both channels of the device it is also possible to use it for double pump systems.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	HCC/S 2.2.1.1	2CDG110220R0011		0.285	1
Manual Operation	6	HCC/S 2.2.2.1	2CDG110221R0011		0.29	1

MPG/S 8.1.1

KNX/MP-Bus Controller, MDRC **NEW**

The KNX/MP-Bus Controller allows the integration of Belimo MP-Bus devices into the KNX bus. Depending on the type of the MP-Bus devices connected to the controller up to 8 or up to 16 MP-Bus devices can be connected. The addressing of the MP-Bus devices can be done via a free-of-charge DCA or as well via the known Belimo tools. The device allows the easy control and dispalying of all relevant data points of the MP-Bus devices, such as control value, forced override, relative position, actual position etc. as well as the sensor integration of the MP-Bus devices.
Available Q1/2026

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	MPG/S 8.1.1	2CDG110311R0011		0.11	1

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

BCI/S 1.1.1

Boiler/Chiller Interface, 1-fold, MDRC

As interface between the KNX system and a heat generator or chiller. Via an analog output (0…10 V) the set point or set point adjustment temperature can be transmitted to the heat generator/chiller. The set point itself is received via KNX. Via two binary inputs the device can monitor the status of the heat generator/chiller (via potential free contacts) and send it on the KNX bus. A relay output (5 A) is included to switch or enable/disable the heat generator/chiller. With an additional relay output (5 A) the pump of the heat generator/chiller can be switched on and off. Via 3 binary inputs it is possible to monitor the status of the pump (via potential free contacts) and integrate these feedback into the control of the pump.
The device supports the ABB i-bus® Tool for advanced diagnosis and improved commissioning.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	6	BCI/S 1.1.1	2CDG110222R0011		0.21	1

PM5630-2ETH

TB5600-2ETH

AC500 Programmable Logic Controller PM5630

Powerful freely programmable KNX Building Automation Controller with flexible expandable In- and Output Modules. Automation programs based on the globally standardized IEC 61131 programming languages can be executed. Both the graphical and textual programming languages are supported. The programming software ABB Automation Builder based on the established Codesys software enables the easy creation and reuse of automation programs as well as the integration of software libraries. The ABB Automation Builder is integrated with the ETS through an ETS app.
Up to 1000 KNX group objects can be used in the automation program. The KNX relevant settings such as physical address, linking of the controller group objects with group addresses and the KNX sending conditions are set in the ETS and can also be changed at any time without ABB Automation Builder.
The building automation controller has two Ethernet network interfaces. The use is flexible adjustable. In addition to KNXnet/IP communication, these can also be used for other protocols and functions. Among other things, for Modbus TCP and a web server with a freely customizable web interface for display and operation of the system.
The controller has a built-in display, an RS-232/485 interface for i. a. Modbus. The internal clock and data variables can be buffered by a battery. The internal memory of 8 MB can be extended by the memory card slot.
For a complete product the CPU module PM5630-2ETH as well as the Terminal Base TB5600-2ETH are required. To be able to connect the PLC with KNX the KNX Runtime License is required additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
AC500 Programmable Logic Controller PM5630	–	PM5630-2ETH	1SAP131000R0278		0.16	1
AC500 Terminal Base TB5600-2ETH		TB5600-2ETH	1SAP110300R0278		0.20	1
AC500 V3 KNX IP Runtime License		PS5604-KNX	1SAP195800R0101		0.01	1

DM200-TOOL

License Automation Builder

License for the engineering software Automation Builder for AC500 PLCs:
This license is valid for a single computer and allows the programming of any number of AC500 PLCs.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	DM200-TOOL	1SAS010000R0102		0.01	1

DI572

Digital Input Module, 16 DI 240 V AC

Extension module for the AC500 PLC with 16 digital inputs for 100 – 240 V AC. Connection of the cables via pluggable spring terminals.
Terminals (9 + 11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Digital Input Module, 16 DI 240 V AC	–	DI572	1SAP230500R0000		0.14	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6
TA565-9/L444709:S500, Terminal block, 9 springs		TA565-9	1TNE968901R3105		0.02	6

DC562

Digital Input/Output Module 16DC: 24 V DC/0.5 A

Extension module for the AC500 PLC with 16 switchable digital inputs or outputs for 24 V DC. The electronic transistor outputs switch 0.5 A. Connection of the cables via pluggable spring terminals.
Terminals (9 + 11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Digital Input/Output Module 16DC: 24 V DC/0.5 A	–	DC562	1SAP231900R0000		0.22	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6
TA565-9/L444709:S500, Terminal block, 9 springs		TA565-9	1TNE968901R3105		0.02	6

ABB i-bus® KNX

Heating, Ventilation and Air Conditioning

DX571

Digital Input/Output Module, 8 Digital Inputs/8 Digital Outputs - Relay
Extension module for the AC500 PLC with 8 digital inputs and 8 digital outputs. The digital inputs process 24 V DC signals. The relay outputs switch a maximum of 2 A at 24 V DC and a maximum of 1.5 A at 120/240 V AC. Connection of the cables via pluggable spring terminals.
Terminals (9 + 11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Digital Input/Output Module, 8 Digital Inputs/8 Digital Outputs - Relay	–	DX571	1TNE968902R2302		0.24	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6
TA565-9/L444709:S500, Terminal block, 9 springs		TA565-9	1TNE968901R3105		0.02	6

DO572

Digital Output Module, 8 Digital Outputs, Triac, 0.3 A
Extension module for the BAC/S Building Automation Controller KNX with 8 digital outputs. The digital triac outputs switch a maximum of 0.3 A at 120/240 V AC. Connection of the cables via pluggable spring terminals.
Terminals (9 + 11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Digital Output Module, 8 Digital Outputs, Triac, 0.3 A	–	DO572	1TNE968902R2203		0.16	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6
TA565-9/L444709:S500, Terminal block, 9 springs		TA565-9	1TNE968901R3105		0.02	6

AX561

Analog Input/Output Module, 4 Analog Inputs/2 Analog Outputs U/I
Extension module for the BAC/S Building Automation Controller KNX with 4 analog inputs and 2 analog outputs. The inputs and outputs support voltage signals from 0 V ... + 10 V, 0 V ... + 5 V, - 2.5 V ... + 2.5 V and -5 V ... + 5 V as well as current signals of 0 mA ... 20 mA and 4 mA ... 20 mA. Connection of the cables via pluggable spring terminals.
Terminals (9 + 11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Analog Input/Output Module, 4 Analog Inputs/2 Analog Outputs U/I	–	AX561	1TNE968902R1301		0.23	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6
TA565-9/L444709:S500, Terminal block, 9 springs		TA565-9	1TNE968901R3105		0.02	6

AI562

Analog Input Module, 2 Analog Inputs

Extension module for the BAC/S Building Automation Controller KNX with 2 analog inputs for temperature sensors. Temperature sensors of type Pt100, Pt1000, Ni100, Ni1000 and 150 Ohm, 300 Ohm are supported. Connection of the cables via pluggable spring terminals. Terminals (11 springs) must be ordered additionally.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Analog Input Module, 2 Analog Inputs	–	AI562	1TNE968902R1102		0.22	1
TA565-11/L444711:S500, Terminal block, 11 springs		TA565-11	1TNE968901R3106		0.02	6

ABB i-bus® KNX

Automation, Logic and Time Control

	Logic Module LM/S 1.1	Application Unit, Logic ABL/S 2.1	Application Unit,Time ABZ/S 2.1	Logic Controller ABA/S 1.2.1
General				
Supply voltage	KNX	KNX	KNX	24 V DC/PoE
Ethernet connection	–	–	–	■
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	2	2	2	4
Software function				
Logic gates	■	■	–	■
Gate/filter	■	■	–	■
Multiplexer	–	–	–	■
Flip Flop	–	–	–	■
PID Controller	–	–	–	■
Composite function blocks	–	–	–	■
Time delay	■	■	–	■
Staircase lighting/Pulse duration	■	■	–	■
Calculation	■	–	–	■
Min./Max.	■	■	–	■
Comparator/Threshold	■	■	–	■
Format converter	■	–	–	■
Counter	■	–	–	■
Calendar switch program	–	–	■	■
Day routines	–	–	■	■
Week routines	–	–	■	■
Year routines	–	–	■	■
Special days	–	–	■	–
Daylight saving times	–	–	■	–
Telegram multiplier	■	–	■	■
Simulation (offline)		–	–	■
Webserver	–	–	–	■
Programming via KNX	■	■	■	■
Programming via Ethernet	–	–	–	■
Max. number of function elements	3	140	30	3000
Monitoring (online)	–	–	–	■

■ = Function is supported

– = Function is not supported

■ = Limited functions

LM/S 1.1

Logic Module, MDRC

Used to solve a varied range of project-specific control tasks and can implement 3 functions simultaneously. The following functions are available for selection: logic gate, filter, time delay, multiplier, min/max value detector, temperature comparator, toggle values, threshold detection, format converter, scenes, increment/decrement values, staircase lighting.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	LM/S 1.1	GHQ6310080R0111		0.1	1

ABL/S 2.1

Application Unit Logic, MDRC

Allows the compilation of complex logical functions by simply combining different logic elements and gates using a graphical user interface as an ETS plug-in and does not require additional software. 50 logical elements, 50 gates, 30 timer modules and 10 comparators are available.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	ABL/S 2.1	2CDG110073R0011		0.12	1

ABZ/S 2.1

Application Unit Time, MDRC

It provides a yearly time clock program with 15 daily routines (800 switching events), a weekly schedule and allowance for 100 special days. Additionally, the unit can control up to 300 participants in 30 macro groups, that can be triggered using a single command. In this way, each time controlled switching event can cause a series of actions. The switching times can be modified with the free PZM software without using ETS. PZM Software and additional information on www.abb.com/knx.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	ABZ/S 2.1	2CDG110072R0011		0.12	1

ABA/S 1.2.1

Logic Controller, MDRC

The device provides extensive logic functions. The logic is defined via a graphic editor integrated in the ETS. Up to 3000 logic gates are possible.
The generated logic can be tested by a simulation function. User-defined function blocks can be created and saved for taking them over into other projects.
The device requires an auxiliary voltage, either 24 V DC or Power over Ethernet (PoE).
If timer functions are used the date and time has to be provided via KNX/TP.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	ABA/S 1.2.1	2CDG110192R0011		0.192	1

ABB i-bus® KNX

Automation, Logic and Time Control

FW/S 8.2.1

Radio Time Switch, 8 Channels, MDRC

The Radio Time Switch sends current time and date on the bus. The time can be optionally received via a DCF or GPS antenna. Furthermore the device can be used to easily adjust the time programs.
The device provides 8 channels. Every channel supplies an independent daily, time and/or yearly program. Additionally, special programs (e.g. for vacation or public holiday days) are possible.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	3	FW/S 8.2.1	2CDG120039R0011		0.33	1

FAD/A 1.1

DCF Antenna for Radio Time Switch, SM

For the connection to the Radio Tme Switch FW/S 8.2.1. The time signal from the DCF 77 transmitter can be received within a radius of approx. 1.000 km around Frankfurt.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	FAD/A 1.1	2CDG120040R0011		0.17	1

FAG/A 1.2

GPS Antenna for Radio Time Switch, SM

For the connection to the Radio Time Switch FW/S 8.2.1. The device receives time and date via GPS signal which is available worldwide.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	FAG/A 1.2	2CDG120070R0011		0.09	1

PS/E 2.2

Programming Set OBELISK top2 for Radio Time Switch

The programming set contains a memory card PK/E 2.1 for transferring switching programms to the Radio Time Switch and a USB programming adapter for the memory card.
The newest version of the software Obelisk top2 for the creation of switching programs for the Radio Time Switch FW/S 8.2.1 can be downloaded on our website.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	PS/E 2.2	2CDG120071R0011		0.20	1

PK/E 2.1

Memory Card OBELISK top2 for Radio Time Switch

The memory card can be used for transferring switching programs to Radio Time Switch.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	PK/E 2.1	2CDG120043R0011		0.02	1

TR/A 1.1

Time Receiver GPS, SM

For the reception and processing of the GPS signal, as well as for brightness and temperature measurement. The sensor measures the brightness and outside temperature and sends them on the KNX bus. Likewise the time, date and geographical coordinates are send to the KNX bus. Additionally the sunrise and sunset times are also send to the bus. With integrated Bus Coupler.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	TR/A 1.1	2CDG120060R0011		0.09	1

ABB RoomTouch®

As individual as your home

ABB RoomTouch® 4"

- 12 control elements
- KNX Data Secure
- Up to 12 status information can be shown (e.g. fault/alarm messages)
- Haptic feedback (vibration)
- Integrated proximity and brightness sensor and room temperature controller
- Anti-glare mode for use in dark, complementing the day and night mode
- Flexible visualization (1-4 functions per page)
- Integrated binary input and external temperature sensor input
- Commissioning via ETS5/6 and DCA tool

ABB RoomTouch® 5"

- Up to 30 control elements
- Separate fault and alarm messages
- Up to 20 status information can be shown (e.g. fault/alarm messages)
- Acoustic and haptic feedback
- Integrated proximity and brightness sensor and room temperature controller
- Anti-glare mode for use in dark, complementing the day and night mode
- Flexible visualization (1-5 functions per page)
- Integrated binary input and external temperature sensor input
- Metal frame and glass display
- Commissioning via ETS5/6 and DCA tool

ABB i-bus® KNX

Visualisation, Display and Signalling

RT/U12.86.1-825

RT/U12.86.1-811

ABB RoomTouch® 4", FM
Freely programmable Touch panel up to 12-fold featuring a 4-inch IPS screen with 480*480 resolution that offers home control and monitoring of the free@home, or KNX system.
Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element. With scene function, logic functions, presence simulation and time programs. The devices support KNX Data Secure.

KNX and free@home functions:
- 12 control elements are displayed on a maximum of 12 pages
- 12 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4 touch surfaces on one page
- Primary function 18 fault and alarm messages
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000/6226/T).

External power supply needed: 20-32 V DC (SELV)
Number of bus subscribers: 1
Optional Removal protection: TZE/U.0.xx.CK

Display size: 10.16 cm (4")
Display resolution: 420*420
Display screen: IPS display
Dimensions (L x W x D): 86 mm x 86 mm x 11 mm
Display surface: glass black (-825), glass white (-811)
Frame color: black matt (-885), white matt (-884)

Class of temperature controller 1 Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	RT/U12.86.1-825	2TMA310011B0003		0.127	1
white glass	–	RT/U12.86.1-811	2TMA310011W0001		0.17	1

ABB i-bus® KNX

Visualisation, Display and Signalling

RT/U 30.0.1-811

ABB RoomTouch® 5", FM

Freely programmable KNX touch display as a control, notification and operation center for your room. For the display and operation of the following KNX standard functions: switching, dimming, slider, blind, RGBW LED control, step switch, RTC, scene switch, display element, audio control and Split Unit control. With scene and logic functions and time programs.
Displays alerts and malfunctions. Programmable with up to max 30 functions.
External power supply: 20 – 32 V DC (SELV). The freely programmable touch display (5") comes with a HD resolution of 720 x 1280 and a view angle of 160°.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white glass	–	RT/U 30.0.1-811	2TMA200050W0007		0.24	1
black glass	–	RT/U 30.0.1-825	2TMA200050B0005		0.24	1

BOX/U 5.1

ABB RoomTouch® Installation Box, FM

For flush mounting and hollow wall panel mounting of the ABB RoomTouch® 5" RT/U30.0.1-8xx. Windproof.
Dimensions flush mounting (H x W x D): 121 mm x 58 mm x 50 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Box	–	BOX/U 5.1	2TMA200160B0003		0.10	1

ABB SmartTouch® 10"

Elegant central control for smart buildings

Freely programmable Touch panel featuring a 10-inch IPS screen with 1280 x 800 resolution that combines smart home and building automation and door communication in one device for residential applications, hotels, and commercial buildings. ABB SmartTouch® 10" offers home control and monitoring of the ABB-free@home®, or ABB i-bus® KNX system and the fully integrated functions of ABB-Welcome.

—
01

Control, observe and manage your entire installation on one device: Switching – Dimming – Slider – Blind – RGBW control element – Step switch – Scene switch – Display element – Audio control element – RTC control element – VRV control element and display different values such as energy consumption and production. With scene function, logic functions, presence simulation and time programs. ABB SmartTouch® 10" can also be used as an end device for communication with the ABB-Welcome outdoor stations, and as part of the ABB-Welcome door communication system.

Functions:

- ABB i-bus® KNX: A total of 450 control elements are displayed on a maximum of 25 pages.
- ABB-free@home®: Twisted pair connection provides a single dashboard page with a maximum of 18 controls. Alternatively, for additional control, connection via wi-fi delivers the same amount of control and features as the ABB-free@home® App Next.
- 80 fault and alarm messages
- 30 logic functions
- 40 timers
- presence simulation for 20 participants
- 10 scene actuators (in total 100 scenes are possible to store)
- 3 object RTCs
- Equipped with a hearing loop for coupling the audio signal into hearing aids
- A single page can have up to 18 touch surfaces

Specifications:

- External power supply: 20-32 V DC (SELV) or via the ABB-Welcome system controller.
- Display size: 25.4 cm (10"): Display resolution: 1280 x 800: Display screen: IPS display
- Dimensions (L x W x D): 180.2 mm x 254.6 mm x 17.5 mm
- Flush or Surface mounted. Can also be mounted on a desktop stand.
- The flat design slim real metal frame sits almost flush with the wall (14 mm) and is available in 4 colors (stainless steel, graphite, gold and rose gold) and black or white glass.

—
01 ABB SmartTouch® 10", black

ABB i-bus® KNX

Visualisation, Display and Signalling

ST/U10.1.1-811

ABB SmartTouch® 10"

Freely programmable touch panel featuring a 10-inch IPS screen with 1280*800 resolution that combines smart home automation and door communication in one device for residential applications, hotels, and commercial buildings. ABB SmartTouch® 10" offers home control and monitoring of the ABB-free@home®, or ABB i-bus®KNX system and the fully integrated functions of ABB-Welcome.

Control, observe and manage your entire installation on one device: Switching – Dimming – Slider – Blind – RGBW control element – Step switch – Scene switch – Display element – Audio control element – RTC control element – VRV control element and display different values such as energy consumption and production. With scene function, logic functions, presence simulation and time programs. ABB SmartTouch® 10" can also be used as an end device for communication with the ABB-Welcome outdoor stations, and as part of the ABB-Welcome door communication system.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white/stainless	–	ST/U10.1.1-811	2TMA310051W0001		0.793	1
black/stainless	–	ST/U10.1.1-825	2TMA310051B0001		0.793	1
white/graphite	–	ST/U10.2.1-811	2TMA310051W0002		0.953	1
black/graphite	–	ST/U10.2.1-825	2TMA310051B0002		0.953	1
white/satin gold	–	ST/U10.3.1-811	2TMA310051W0003		0.953	1
black/satin gold	–	ST/U10.3.1-825	2TMA310051B0003		0.953	1
white/rose gold	–	ST/U10.4.1-811	2TMA310051W0004		0.953	1
black/rose gold	–	ST/U10.4.1-825	2TMA310051B0004		0.953	1

6136/07 UP-500

Busch-SmartTouch Installation Box, FM

For flush mounting and hollow panel mounting of the Busch-SmartTouch 10" ST/U10.x.1-8xx. Windproof.

Dimensions flush mounting (H x W x D): 152 mm x 235 mm x 60 mm.

Dimensions hollow wall (H x W x D): 146 mm x 227 mm x 50 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6136/07 UP-500	2CKA006136A0212		0.549	1

ST/A10.1-811

Surface Mounting Frame for SmartTouch® 10"

Surface mounting frame for mounting the ABB SmartTouch 10" ST/U10.x.1-8xx on:

- standard flush mounted wall box VDE & BS
- Already installed flush mounted installation box:
  - 6136/UP
  - 8136/01 UP-500
  - UP-KAST 2
- to be mounted directly on the wall
- to be mounted on the ABB-Welcome table stand

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	ST/A10.1-811	2TMA310161W0001		0.144	1
black	–	ST/A10.1-825	2TMA310161B0001		0.144	1

H8236-5W

IP touch 7 LAN/LAN

With integrated induction Loop. Can be used for ABB Welcome IP, ABB i-bus® KNX, ABB-free@home. For ABB-Welcome IP support direct connection to ABB-Welcome App. For ABB-free@home: Up to 4 pages and each with up to 16 control elements. Total 64 control frames. For ABB i-bus® KNX: Up to 8 pages and each with up to 16 control elements. Total 64 control frames. Flush mountable. Power Supply over PoE, local power supply or plug-in power supply (53011PS).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	H8236-5W	2TMA130050W0067		0.4875	1
black	–	H8236-5B	2TMA130050B0067		0.4875	1

H8236-4B

IP touch 7 LAN/Wifi

With integrated induction Loop. Can be used for ABB Welcome IP, ABB i-bus® KNX, ABB-free@home. For ABB-Welcome IP support direct connection to ABB-Welcome App. For ABB-free@home: Up to 4 pages and each with up to 16 control elements. Total 64 control frames. For ABB i-bus® KNX: Up to 8 pages and each with up to 16 control elements. Total 64 control frames. Surface/flush/desktop mountable. Power Supply over PoE, local power supply or plug-in power supply (53011PS).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	H8236-4W	2TMA130050W0065		0.4875	1
black	–	H8236-4B	2TMA130050B0065		0.4875	1

ABB i-bus® KNX

Visualisation, Display and Signalling



42361S-W-03

42361S-B-03

Surface-mounted box for IP touch 7

Mounting of IP touch 7'' panel on the wall. For surface-mounted installation of indoor station. The product is packed with accessories to ensure qualified installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	42361S-W-03	2TMA130160W0021		0.210	1
black	–	42361S-B-03	2TMA130160B0089		0.210	1

H8237-5W

IP touch 10 LAN/LAN

HD resolution display (1280x800px). With integrated induction Loop. Can be used for ABB Welcome IP, ABB i-bus® KNX, ABB-free@home. For ABB-Welcome IP support direct connection to ABB-Welcome App. For ABB-free@home: Up to 4 pages and each with up to 25 control elements. Total 100 control frames. For ABB i-bus® KNX: Up to 8 pages and each with up to 25 control elements. Total 100 control frames. Flush mountable. Power Supply over PoE, local power supply or plug-in power supply (53011PS).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - stainless steel end strip	–	H8237-5W	2TMA130050W0055		1.044	1
black - stainless steel end strip		H8237-5B	2TMA130050B0055		1.044	1

H8237-4B

IP touch 10 LAN/Wifi

HD resolution display (1280x800px). With integrated induction Loop. Can be used for ABB Welcome IP, ABB i-bus® KNX, ABB-free@home. For ABB-Welcome IP support direct connection to ABB-Welcome App. For ABB-free@home: Up to 4 pages and each with up to 25 control elements. Total 100 control frames. For ABB i-bus® KNX: Up to 8 pages and each with up to 25 control elements. Total 100 control frames. Surface/flush/desktop mountable. Power Supply over PoE, local power supply or plug-in power supply (53011PS).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - stainless steel end strip	–	H8237-4W	2TMA130050W0054		1.044	1
black - stainless steel end strip		H8237-4B	2TMA130050B0054		1.044	1



42371S-W



42371S-B

Surface-mounted box for IP touch 10

Mounting of IP touch 10 '' panel on the wall. For surface-mounted installation of indoor station. The product is packed with accessories to ensure qualified installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	42371S-W	2TMA130161W0001		0.221	1
black	–	42371S-B	2TMA130161B0001		0.221	1

42361F

Flush-mounted box and Pre installation box for 7&10'' video indoor station.

The flush mounting box is fitted with knock down holes for cabling from left, right, bottom or back. The product is packed with accessories to ensure qualified installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
black	–	42361F	2TMA130160B0132		0.263	1

53011PS

Plug-in power supply 24 V DC

Plug-in power supply 24 V DC.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	53011PS-03	2TMA130160W0029		0.13	1

KNX APP-Control Server

Smartphones, tablets and smartwatches or PCs turn into a practical remote control, thanks to the KNX APP-Control Server. It connects the KNX installation with the IP network and controls all KNX functions in the building.

New features:
- Smart Energy Management
- Remote programming and access
- Modbus TCP and BACnet IP integration
- KNX offline telegram recorder
- Userfriendly and modern UI

Device features worth mentioning:
- External access the the KNX system
- Easy creation of individual scenes
- Integrated weekly timer (with astro function)
- Integrated logic editor
- Recording and display of diagrams
- Sonos and Philips Hue connection
- Connection of IP cameras with MJPEG protocol possible
- Integrated rights and user management
- Alarm messages via e-mail and/or push notification

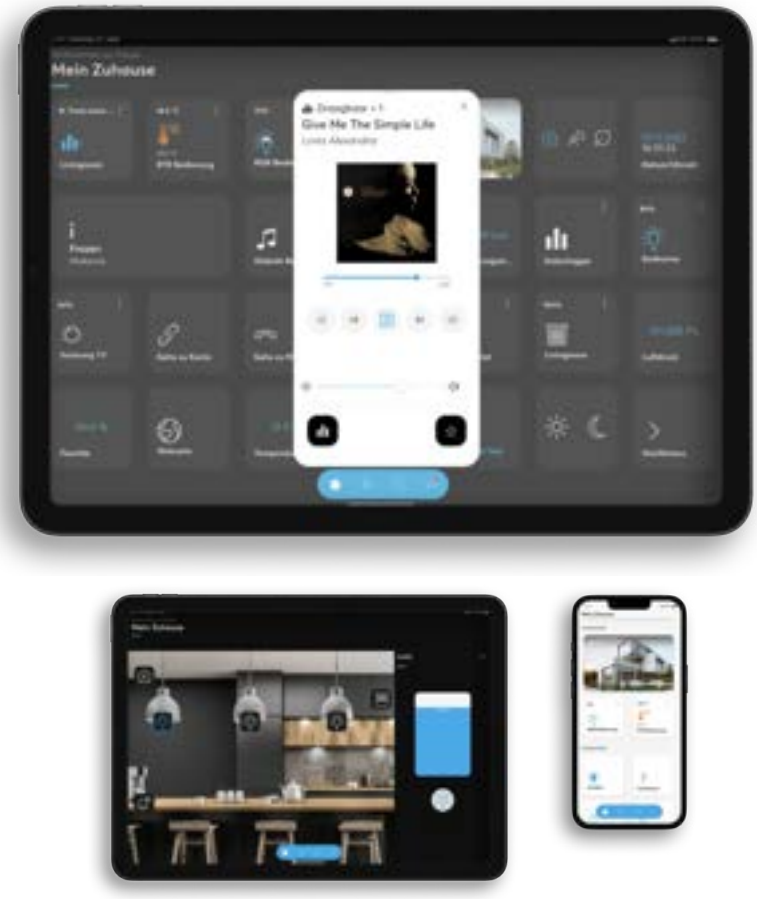

ABB i-bus® KNX

Visualisation, Display and Signalling

CT/S 2.1

KNX APP-Control Server, MDRC

Visualisation server for mobile devices (iOS and Android) and Windows computers. Not only for visualise and control your complete KNX installation but also:

- Sonos Bridge with a complete integration of the Sonos API (Works with Sonos)
- Can be used as a Bridge between KNX and Philips Hue
- Visualisation of your IP camera's, with support of pan, till and zoom
- Unlimited time programs and scenes and they can be edited by the end user
- Integrate Webpages into your design for maybe weather information or traffic information
- Alarm messages can be sent as email or as a push notification (including a snapshot of an IP camera) but can also be heard on your Sonos System (NEW)
- Can be used as a UPnP bridge, so you can control e.g. your UPnP enabled Receiver via KNX
- Statistics and charts support with 5 period types (hour, day, week, month, year)
- Unrestricted personal profiles with an unlimited number of pages and controls
- Easy to use presence simulation, that can be edit by the end customer and with no limitation of participants
- Visualisation functions: dimmer, RGB(W) control, switch, blind and shutter, heating/cooling, air conditioning, scenes, button row (max. 6 buttons), IP camera, status display, value transmitter, Sonos control, and UPnP control
- Has a flexible and unrestricted Script Editor for more complex logical functions based on LUA
- Automatic cloud backups including scenes, time programs and presence simulation data
- Complete commissioning is online and live. You can do it from everywhere and you don't need to drive to the customer
- First commissioning with Wizard support
- Loading the software into the device can be done without Internet
- Device has a direct KNX interface or can communicate via an IP Interface via the bus
- Visualisation as a list view and/or with background pictures with round, rectangle or transparent controls
- Secured remote access via our Cloud solution (For this function, you pay a monthly fee)
- Functional extensions and updates via firmware and software updates.

Security:
This device supports extensive security options to protect your installation and privacy. All communication between the app your installation and our cloud is encrypted and always based on the highest possible standards. The communication between the different parts always requires a username and password. The end user can also protect pages with a pin code, Touch ID or Face ID. Additionally end users can set up local users with access rights to shield certain parts of the home installation or allow them access only to specific parts.
External power supply: 10 – 36 V DC (SELV)
Control element: freely programmable touch surfaces
Bus voltage: 24 V
Protection class (Device): IP 20
Temperature range (Device): 0 °C to +70 °C
Dimensions (L x W x D): 90 mm x 72 mm x 60 mm

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	CT/S 2.1	2CKA006136A0218		0.254	1

Busch-VoiceControl®
Control completely by voice

The building of the future recognises the needs of its users. It reacts individually – automatically and without being asked to do so.

—
01 Busch-VoiceControl®

—
01

- Approved solution for the systems Google Assistant, Amazone Alexa, Apple HomeKit
- Integration of lighting, heating and blind control systems
- All voice commands can be used simultaneously
- Control up to 150 functions
- HomeKit certification allows control of the KNX system from other Home-Kit devices, such as the iPad, iPhone and Apple TV

ABB i-bus® KNX

Visualisation, Display and Signalling

VCO/S 150.2

Busch-VoiceControl® 2, MDRC

A certified voice control gateway for the combination of a KNX system with a voice control system. Acts as a gateway and guarantees that you can operate the KNX components in a house and query their status using Apple, Amazon and Google devices. This component makes it possible to operate the lighting, blind or room temperature controller using simple voice control. Up to 150 functions can be used. Busch-VoiceControl® is an official certified HomeKit accessory. Complete web-based commissioning. Compatible with ABB i-bus® KNX. External power supply: 10-36 V DC (SELV).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	VCO/S 150.2	2CKA006136A0220		0.254	1

CP-D 24/2.5

Power Supply Unit, 24 V DC, 2.5 A

For ABB SmartTouch® 10" ST/U10.4.1-xx, Busch-priOn® Power Bus Coupler 6120/13-500 and KNX APP-Control Server CT/S 2.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CP-D 24/2.5	2CDG120037R0011		0.252	1

UK/S 32.2

Universal I/O Concentrator, 32-fold, MDRC

Used to connect push buttons or signal lamps, e.g. to an operating/display tableau. It has 32 channels which can be freely parameterised as inputs/outputs using the ETS software. The device requires an external 12 or 24 V DC auxiliary power supply.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	UK/S 32.2	2CDG110071R0011		0.18	1

ABB i-bus® KNX

Energy Management

ABB offers various solutions for decentral energy measurement on the basis of the KNX standard.

Version 1

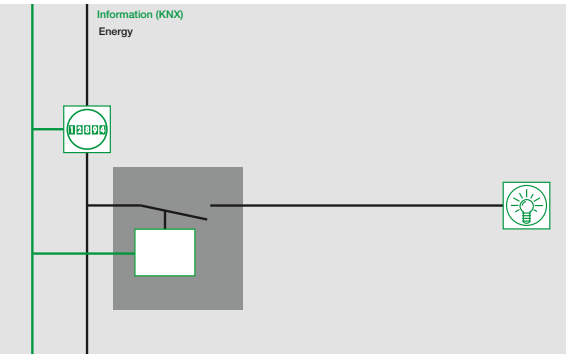

Electronic energy meters make the current energy values available on the KNX bus system in conjunction with a KNX interface. The measured data can be intermediately stored, evaluated and visualized from here.

Version 2

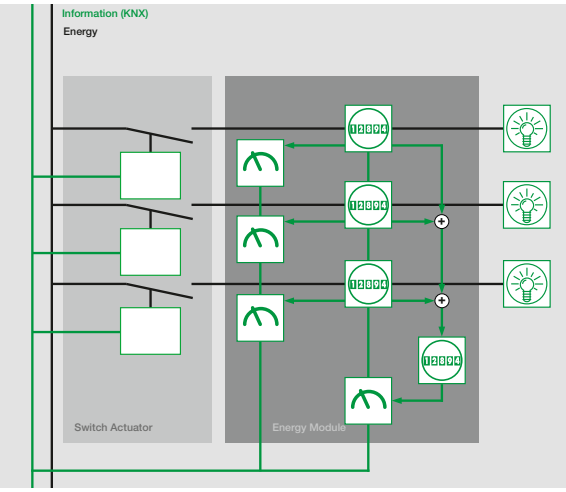

The Energy Module can record the energy consumption for the individual devices. It is used particularly when upgrading existing KNX systems and wherever energy measurement is required without switch functions. It facilitates a detailed and transparent insight into the energy consumption of a building. The current meter values can be sent and evaluated.

Version 3

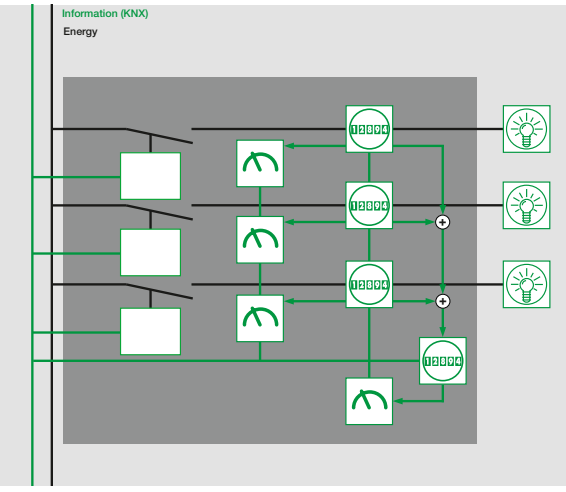

The Energy Actuator facilitates control of the connected consumer loads via the ABB i-bus® KNX. For each of the three switch channels, the individual consumption can be measured in the same way as for the Energy Module. For every channel, the proven functionality of the ABB i-bus® KNX Switch Actuators are available.

Intermediate meter for electrical energy Electrical consumer (load) Energy meter

	Energy Module EM/S 3.16.1	Energy Actuator SE/S 3.16.1	Meter Interface Module ZS/S 1.1 [1]
General			
Supply voltage	KNX	KNX	KNX
Type of installation	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	4	4	2
Number of channels	3	3	–
Rated current I_n	16/20 A	16/20 A AX (C-Load)	–
Measuring range Current	0.025...20 A	0.025...20 A	Depending on meter connected [2]
Measuring range Voltage	95...265 V	95...265 V	Depending on meter connected [2]
Measuring range Frequency	45...65 Hz	45...65 Hz	50/60 Hz ± 5 %
Measurement values			
E – Active energy [kWh]	■	■	■
U – Voltage [V]	■	■	■
I – Current [A]	■	■	■
F – Frequency [Hz]	■	■	■
P – Active power [W]	■	■	■
Q – Reactive power [var]	–	–	■
S – Apparent power [VA]	■	■	■
PF – Power factor	■	■	■
CF – Crest factor	■	■	–
General functions			
Function Switch	–	■	–
Function Time	–	■	–
Function Scene	–	■	–
Function Logic	–	■	–
Function Priority	–	■	–
Load control with Energy Actuators as Master (up to ten SE/S 3.16.1 as slaves)	■	■	–
Load control as Slave	–	■	–
Sending delay (for value request)	–	–	■
Commissioning and diagnostic function			
Control and diagnosis via ABB i-bus® Tool	■	■	–

—

■ = Function is supported

– = Function is not supported

1) = In combination with ABB Energy Meter A and B series

2) = See also Electricity Meters Overview

ABB i-bus® KNX
Energy Management

SE/S 3.16.1

Energy Actuator, 3-fold, 16/20 AX, MDRC
Records the energy consumption of the connected electrical loads in the load circuit. Various electrical variables can be monitored and load peaks can be limited by simple load control. The 3 output channels can be manually operated and display the current switching state. The Energy Actuator can switch resistive, inductive and capacitive loads The switching capacity corresponds to the SA/Sx.16.6.2.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	SE/S 3.16.1	2CDG110136R0011		0.3	1

EM/S 3.16.1

Energy Module, 3-fold, 16/20 AX, MDRC
Measures energy consumption and various electrical parameters in the terminal current. Active power, Current, Voltage and Frequency can be monitored via threshold values and peak loads can be limited through a simple load control. The measured values are provided via ABB i-bus® KNX.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	4	EM/S 3.16.1	2CDG110148R0011		0.2	1

ZS/S 1.1

Meter Interface Module, MDRC
It records consumption and measured values of the electrical energy consumption meters. Using an infra-red interface, the ABB energy meter types of the A- and B-series are incorporated. The information and data which is read can be used, for example, for cost centre accounting, energy optimisation, monitoring of installations and visualisation.

The following values are available (depending on the meter type):

Meter reading
Active energy — Tariff 1-4, total
Reactive energy — Tariff 1-4, total

Power values
Active power — L1, L2, L3, total
Reactive power — L1, L2, L3, total
Apparent power — L1, L2, L3, total
Phase angle power — L1, L2, L3, total
Power factor — L1, L2, L3, total

Instrument values
Voltages — L1-N, L2-N, L3-N, L1-L2, L2-L3, L1-L3
Currents — L1, L2, L3, N
Phase angle voltage — L1, L2, L3, total
Phase angle current — L1, L2, L3, total
Quadrant — L1, L2, L3, total
Mains frequency

Other
Transformer ratio — Read CT and VT
Power failures — Send and delete
Tariffs — Read and changeover
Status information — Send and read
Communication monitoring
Intermediate meter — Read and reset

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	ZS/S 1.1	2CDG110083R0011		0.13	1

QA/S 3.16.1

QA/S 3.64.1

Energy Analyzer, M-Bus, MDRC*

Compact and web-based stand-alone devices for energy management applications.
For monitoring, logging, displaying and analyzing consumption data of up to 16 or 64 electricity, gas, water or heat meters via M-Bus. Automatic detection for ABB EQ meters (A/B-Series). Access to the device via web browser. The user interface provides graphical analysis functions, e.g. dashboard, historical data, instantaneous values, benchmark functions, cost allocation according to consumer groups and more. For further processing data can be exported cyclically (e.g. every month) via E-mail or upload to FTP server.
Several data sharing options (e.g. Modbus TCP, Rest API) allow the communication with other systems.
* Pure M-Bus Master, no data routing from M-Bus to KNX

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
M-bus, 16 Devices	4	QA/S 3.16.1	2CDG110226R0011		0.15	1
M-bus, 64 Devices	4	QA/S 3.64.1	2CDG110227R0011		0.15	1

ABB i-bus® KNX
Safety and Monitoring

SMB/S 1.1

Fault Monitoring Unit, MDRC

It is used to detect and manage up to 100 fault messages which are processed within the unit and can be forwarded to a display unit. Furthermore, an optical and an acoustic collective status signal is provided. Messages can be acknowledged and data losses can be reported.
The devices support message formats to DIN 19 235: messages with continuous lighting, new value messages with simple flashing light, initial value messages with simple acknowledgement, motor messages. Current values can be centrally scanned.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	SMB/S 1.1	GHQ6310085R0111		0.12	1

EUB/S 1.1

EIB Monitoring Unit, MDRC

Monitors up to 100 bus devices in KNX systems, which can be divided into 5 groups. The devices are monitored to ensure their presence and minimum functionality (send and receive). Monitoring can be undertaken based on the physical address or the group address. A total of four different monitoring modes are available. No additional power supply required, the device is powered from KNX bus.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	EUB/S 1.1	2CDG110066R0011		0.12	1

BDB/S 1.1

Data Logging Unit, MDRC

It detects local operation cycles and operating hours to plan the maintenance or durability evaluation of the devices. For each of the 35 channels to be monitored, limit values can be set and a message sent if this limit is exceeded. The logging of operating hours can be predetermined for the total or remaining time. These values can be modified via communication objects. No additional power supply required, the device is powered from KNX bus.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	BDB/S 1.1	2CDG110067R0011		0.12	1

ABB i-bus® KNX

Security – Alarm System KNX

The compact solution for security applications – the Security Terminals
The Security Terminal provides a compact security solution for KNX applications for detection and signalling of intrusion, personal attack and technical hazards. They are used as the interface between the security technology sensors and KNX.

Depending on the configuration, the devices feature 2, 4 or 8 inputs – so-called detector circuits or zones. They are used for monitoring connected passive detectors (e.g. magnetic contacts, glass break sensors, etc.) to the ABB i-bus® KNX as well as for connection of floating contacts in applications with enhanced security requirements.

Through the connection of security technology and KNX, the detectors employed can, in addition to the security functions, also be used for heating control (e.g. window contact signal for control of the heating valve) or lighting control (e.g. central switch off of the lighting when the alarm logic is set).

The Security Terminals can be used as autonomous systems with the integrated alarm logic, in conjunction with the Security Module SCM/S or with an Intrusion Alarm Panel.

The application program offers several functions for security applications, such as

- Direct and delayed setting
- Internal setting with occupancy and external setting when absent
- Setting of the connected detector types
- Reset input and setting input
- Detector monitoring
- Zones (detector circuits) can be switched off
- Different types of alarms
- Setting for freely programmable relay outputs, e.g. for direct control of signalling devices.

ABB i-bus® KNX

Security – Alarm System KNX

	Standard Security			
	MT/U 2.12.2	**MT/S 4.12.2M**	**MT/S 8.12.2M**	**SCM/S 1.1**
General				
Supply voltage	KNX	KNX	KNX	KNX
Auxiliary power supply	12 V DC	12 V DC	12 V DC	–
Type of installation	FM	DIN-Rail	DIN-Rail	DIN-Rail
Module width (18 mm)	–	4	4	2
Inputs (extendable via bus)	2	4	8	0 (64)
Outputs	2 x Relais	3 x Relais	3 x Relais	1 x Relais
Functions				
Connection of conventional security sensors/devices	■	■	■	–
Connection of 4-wired security bus sensors/devices	–	–	–	–
Event log	–	–	–	■ (250)
Remote alarming	Optional via KNX	Optional via KNX	Optional via KNX	Optional via KNX
Back-up power supply				
Optional via NTU/S 12.2000.1 and SU/S 30.640.2	■	■	■	–
Optional via SU/S 30.640.2	–	–	–	■
Integrated back-up power	–	–	–	–
Certifications				
VdS	–	–	–	–
EN 50 131/IEC 62 642	–	–	–	–
Commissioning and diagnostic functions				
Commissioning and diagnostic via webserver	–	–	–	–

■ = Function is supported

– = Function is not supported

SCM/S 1.1

Security Module, MDRC

The module provides the necessary logic functions to link the various KNX devices (e.g. zone terminals) to a security system. Up to 64 different zones can be evaluated via communication objects. Arming, operation and display are also implemented using communication objects. The device has a freely programmable relay output for connection of a signal encoder. An uninterruptable KNX power supply with battery back-up is recommended for security function buffering on mains failure.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	2	SCM/S 1.1	2CDG110024R0011		0.13	1

MT/S 8.12.2M

Security Terminal

They are used as the interface between the security technology sensors and the KNX.
The device features inputs, so-called zones. They are used for monitoring connected passive detectors, e.g. magnetic contacts and/or glass break sensors on the ABB i-bus® KNX and/or for connection of floating contacts in applications with enhanced security requirements.
The device can be used as a system with autonomous alarm logic or in combination with the Security Module SCM/S or an Intrusion Alarm Panel. The device requires an external 12 V DC SELV auxiliary power supply, (e.g. NTU/S 12.2000.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold, MDRC	4	MT/S 4.12.2M	2CDG110109R0011		0.19	1
8-fold, MDRC	4	MT/S 8.12.2M	2CDG110110R0011		0.19	1
2-fold, FM	–	MT/U 2.12.2	2CDG110111R0011		0.08	1

ABB i-bus® KNX

Security – Components

MRS/W

Magnet Reed Contact Set

For opening surveillance of windows and doors, complete for bolting or drilling. Contents: 1 magnet, 1 reed contact with 4.0 m connection cable LIYY 4 x 0.14 mm², 2 housings, 2 spacer plates, 2 flanges and 4 anti-magnetic fixing screws. VdS class B.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	MRS/W	GHQ3201972R0001		0.1	1
Saver Set (20 pcs.), white	–	VMRS/W	GHQ3201972R0011		1.99	1

MC-C 1.1

Rolling Door Reed Contact

The Rolling Door Reed Contact Set is mounted mainly on rolling, sliding, and tilting doors.
The contact housing is mounted on the ground (a flat support surface is required).
Only screws made of anti-magnetic material may be used for mounting.
Due to the weatherproof and mechanically stable design of the contact housing, the circuit is mostly protected against damage when rubber-tired vehicles drive over it.
The 4-wire cable is protected by a plastic-coated metal hose.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
VdS Class B, EN Grade 2	–	MC-C1.1	2CDG250006R0011		0.3	1

SPGS/W

Passive Glass Break Sensor

For opening surveillance of windows and doors, complete for bolting or drilling. VdS class B.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	SPGS/W	GHV9220004V0009		0.11	1

WRK/W

Lock Bolt Switching Contact with Connection Cable

For installation in the strike plate, for lock monitoring on doors. Water-tight IP 67, with 2.5 m connection cable LIYY 3 x 0.14 mm². VdS class C.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	WRK/W	2CDG250003R0011		0.03	1

TD-C 1.1

Gas Detector with Relay Contact

The Gas Detector is used for monitoring gas leakage of domestic and commercial rooms. It detects gases like propane, methane and butane as well als acetylene, city gas and natural gas. The detector can be connected to ABB intrusion and fire alarm control panels, as well as ABB i-bus® binary inputs via a potential-free relay contact. Suitable as a stand-alone device. An external power supply with 12-24 V DC is required.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	TD-C 1.1	2CDG220023R0011		0.167	1

SWM 4

Water Detector for Detector Groups

A resin-encapsulated water detector with gold-plated Termipoint pins, detects water ingress, e.g., pipe fractures, ingress of groundwater and sewage, water damage caused by washing machines and dishwashers etc. before the damage becomes too expensive.
For operation directly on detector circuits of intrusion alarm panels or security terminals.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SWM 4	GHQ4030001R0004		0.16	1

SWM 4/RN

Water Detector with Relay, 12 V

Features a potential free changeover contact output, an LED parallel output and a LED display. The detector resets itself automatically when the affected area dries out. The device draws its power from an external 10 ... 23 V DC voltage source.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SWM4/RN	GHQ4030001R0012		0.23	1

6833/01-84-500

Busch-Smoke Alarm® ProfessionalLine

For early detection of smouldering fires and open fires with smoke development indoors according to the photooptical measurement principle (Tyndall). With installed Lithium battery. Battery life min. 10 years. With test button and muting. Can be networked with up to 12 detectors using the radio module. Can be networked via 2-wire twisted pair cable with up to 12 detectors. Acoustic alarm: installed horn (85 dBA). Cyclic functional test. Including attachment material – VdS certified. Conform to EN 14604 studio white.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Not networkable	–	6833-84-500	2CKA006800A2720		0.154	1
Networkable	–	6833/01-84-500	2CKA006800A2721		0.268	1

ABB i-bus® KNX

Security – Components

6827-84

Busch-Smoke Alarm® Radio Module

For wireless networking of multiple Busch smoke alarms®/heat alarms.
With installed Lithium battery. Battery life min. 10 years. Radio frequency: 868 MHz.
Range: max. 100 m outdoors, max. 30 m indoors.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6828	2CKA006800A2514		0.268	1

6829-84

Busch-Smoke Alarm® Relay

For connecting external systems, e.g. KNX. Relay contact, floating changeover contact 230 V~ max. 5 A. Cable connection: up to 2 x 2 x 1.5 mm². With installed radio module.
Rated voltage: 230 V~.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white	–	6829-84	2CKA006800A2515		0.268	1

SSS

Indoor Siren, 12 V DC

Electronic solid-state siren with intermittent tone for alarm purposes in indoor installations.
External dimensions: ø x H = 90 mm x 37 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SSS	GHV9270001V0001		0.17	1

SSF/GB

Siren with Strobe

An aluminium protective housing with additional protective enamel coating. Protected against sabotage by a case tamper contact. The alarm inputs are wired onto a terminal strip. With fixing screw (M4) for potential equalization on the base.
Dimensions (H x W x D) = 258 mm x 205 mm x 88 mm; Color: RAL 9002 Environmental class III to VdS.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	SSF/GB	GHQ3050018R0001		1.81	1

Notes

ABB i-bus® KNX

User Operation – Design Ranges – Unique diversity of the range

01

02

03

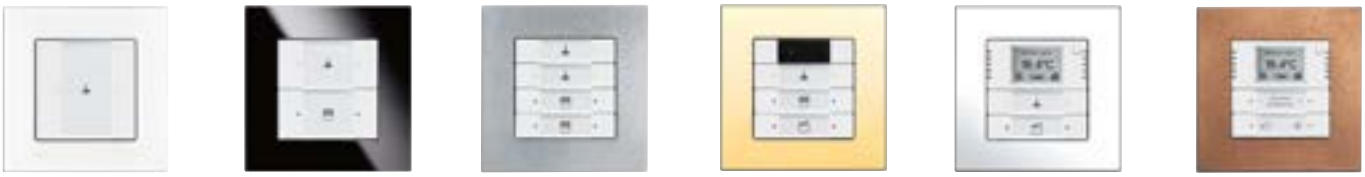

04

05

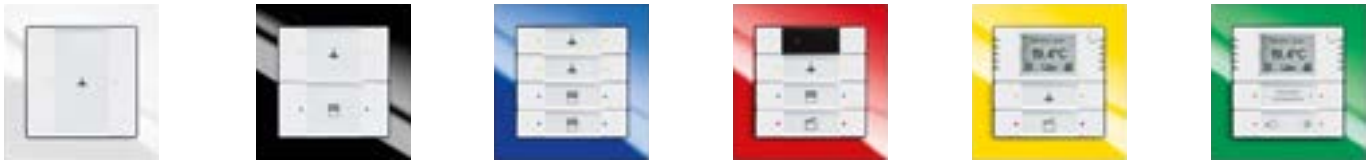

06

07

08

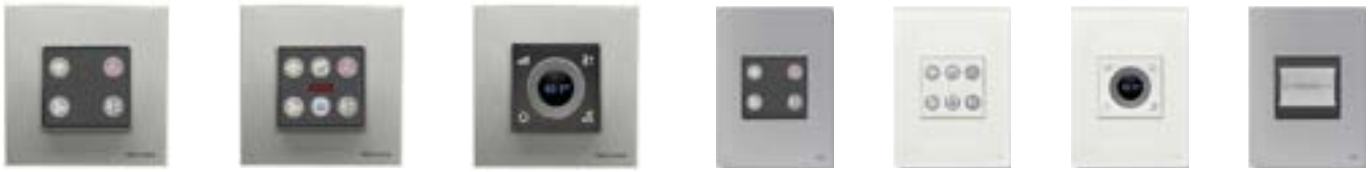

09

10

11

01 tacteo
02 ABB Tenton®
03 carat®
04 pure stainless steel
05 Busch-axcent®
06 future® linear

07 Millenium*
08 Zenit for VDE/NEMA markets
09 Busch-priOn®
10 ABB Trevion®
11 Bus Coupling Unit – for conventional Busch-Jaeger series**

Further information regarding the ABB switch ranges are available on https://new.abb.com/low-voltage/products/residential-products/switch-ranges

* Millenium and Zenit series are only available in selected markets.

** Busch-Jaeger switch ranges only available for selected markets. For further information please contact your local ABB office.

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	Busch-priOn® suitable for KNX bus coupler 6120/12-101 or 6120/13 (depending on the specific combination)		
	6340-xx-101 1/2 gang	6341-xx-101 rotary control element	6342-xx-101 3/6 gang
KNX function			
Switching, rocker switch total	■	–	■
Switching, rocker switch left/right	■	■	■
Dimming, rocker switch total	■	–	■
Dimming, rocker switch left/right	■	–	■
Blind, rocker switch total	■	–	■
Blind, rocker switch total left/right	■	■	■
Short-long operation, rocker switch left/right	■	–	■
Value sender, rocker switch total	■	–	■
Value sender, rocker switch left/right	■	–	■
Value dimming sensor, rocker switch total	■	■	■
Red/green LED status illumination (red/green/off)	–	–	–
RGB LED function illumination + status illumination	1 LED per rocker switch	1 LED per button	1 LED per rocker switch
Setting the RTC operating mode	■	–	■
Value sender, 2 objects, rocker switch left/right	■	–	■
Light scene extension unit with light scene memory function	■	–	■
Level switch, rocker switch total	■	–	■
Level switch, rocker switch total left/right	■	–	■
Multiple operation, rocker switch left/right	■	–	■
IR remote control channels (up to 13 channels)	–	–	–
Light scene unit (8 scenes for up to 8 actuators)	–	–	–
Light scene unit (10 scenes for up to 10 actuators)	–	–	–
Programmable shift key	–	–	–
Proximity function	–	–	–
Room temperature controller only			
Temperature reading	–	–	–
RTC settings	–	–	–
Illuminated display	–	–	–
Fan coil operation for heating and cooling	–	–	–
Media box/CD/DVD/radio	–	–	–
Short-time timer	–	–	–
Weekly timer	–	–	–
Alarm clock	–	–	–
Messages	–	–	–
Screen saver	–	–	–
Display text/value	–	–	–
Device lock	–	–	–
Logic function (including light scenes)	■	■	■
Busch-Watchdog 4 channels	–	–	–

■ = Function is supported

– = Function is not supported

Program		
	6345-xx-101	6351-825-101 end strip top with information display, room temperature controller, IR receiver and proximity sensor + 6342-xx-101 3/6 gang
KNX function		
Switching, rocker switch total	–	■
Switching, rocker switch left/right	–	■
Dimming, rocker switch total	–	■
Dimming, rocker switch left/right	–	■
Blind, rocker switch total	–	■
Blind, rocker switch total left/right	–	■
Short-long operation, rocker switch left/right	–	■
Value sender, rocker switch total	–	■
Value sender, rocker switch left/right	–	■
Value dimming sensor, rocker switch total	–	■
Red/green LED status illumination (red/green/off)	–	–
RGB LED function illumination + status illumination	–	1 LED per rocker switch
Setting the RTC operating mode	–	■
Value sender, 2 objects, rocker switch left/right	–	■
Light scene extension unit with light scene memory function	–	■
Level switch, rocker switch total	–	■
Level switch, rocker switch total left/right	–	■
Multiple operation, rocker switch left/right	–	■
IR remote control channels (up to 13 channels)	–	■
Light scene unit (8 scenes for up to 8 actuators)	–	–
Light scene unit (10 scenes for up to 10 actuators)	–	–
Programmable shift key	–	–
Proximity function	–	■
Room temperature controller only		
Temperature reading	–	–
RTC settings	–	■
Illuminated display	–	■
Fan coil operation for heating and cooling	–	■
Media box/CD/DVD/radio	–	–
Short-time timer	–	–
Weekly timer	–	–
Alarm clock	–	–
Messages	–	–
Screen saver	–	–
Display text/value	–	■
Device lock	–	–
Logic function (including light scenes)	■	■
Busch-Watchdog 4 channels	■	–

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	**Busch-priOn® suitable for KNX bus coupler 6120/12-101 or 6120/13 (depending on the specific combination)**	
	[redacted]	[redacted]
	6350-825-101 end strip top with IR receiver and proximity sensor	6352-xx-101 end strip bottom with temperature sensor
KNX function		
Switching, rocker switch total	–	–
Switching, rocker switch left/right	–	–
Dimming, rocker switch total	–	–
Dimming, rocker switch left/right	–	–
Blind, rocker switch total	–	–
Blind, rocker switch total left/right	–	–
Short-long operation, rocker switch left/right	–	–
Value sender, rocker switch total	–	–
Value sender, rocker switch left/right	–	–
Value dimming sensor, rocker switch total	–	–
Red/green LED status illumination (red/green/off)	–	–
RGB LED function illumination + status illumination	–	–
Setting the RTC operating mode	–	–
Value sender, 2 objects, rocker switch left/right	–	–
Light scene extension unit with light scene memory function	–	–
Level switch, rocker switch total	–	–
Level switch, rocker switch total left/right	–	–
Multiple operation, rocker switch left/right	–	–
IR remote control channels (up to 13 channels)	■	–
Light scene unit (8 scenes for up to 8 actuators)	–	–
Light scene unit (10 scenes for up to 10 actuators)	–	–
Programmable shift key	–	–
Proximity function	■	–
Room temperature controller only		
Temperature reading	–	■
RTC settings	–	–
Illuminated display	–	–
Fan coil operation for heating and cooling	–	–
Media box/CD/DVD/radio	–	–
Short-time timer	–	–
Weekly timer	–	–
Alarm clock	–	–
Messages	–	–
Screen saver	–	–
Display text/value	–	–
Device lock	–	–
Logic function (including light scenes)	–	–
Busch-Watchdog 4 channels	–	–

■ = Function is supported

– = Function is not supported

Program	**Millenium**		
	6125/20-500 1/2 gang	6126/20-500 2/4 gang	6129/20-500 3/6 gang
KNX function			
Switching, button pair	■	■	■
Switching, button upper/lower	■	■	■
Dimming, button pair	■	■	■
Dimming, button upper/lower	■	■	■
Blind, button pair	■	■	■
Blind, button upper/lower	■	■	■
Short-long operation, button upper/lower	■	■	■
Value transmitter, button pair	■	■	■
Value transmitter, button upper/lower	■	■	■
Value dimming sensor, button pair	■	■	■
Value dimming sensor, upper/lower	■	■	■
RGB LED function illumination + status illumination	■	■	■
Setting the RTC operating mode	■	■	■
Value transmitter, 2 objects, button upper/lower	■	■	■
Light scene extension unit with light scene memory function	■	■	■
Step switch, button pair	■	■	■
Step switch, button upper/lower	■	■	■
Multiple operation, button upper/lower	■	■	■
IR remote control channels (up to 5 channels)	–	–	–
Room temperature controller only			
Temperature reading	–	–	–
RTC settings	–	–	–
Illuminated display	–	–	–
Fan coil operation for heating and cooling	–	–	–
10 logic channels (incl. light scene, actuator, sequence actuator, logic gates, etc.)	■	■	■
Busch-Watchdog 4 channels	–	–	–

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	**Millenium**	
	6129/21-500 3/6 gang with IR	6124/20-500
KNX function		
Switching, button pair	■	–
Switching, button upper/lower	■	–
Dimming, button pair	■	–
Dimming, button upper/lower	■	–
Blind, button pair	■	–
Blind, button upper/lower	■	–
Short-long operation, button upper/lower	■	–
Value transmitter, button pair	■	–
Value transmitter, button upper/lower	■	–
Value dimming sensor, button pair	■	–
Value dimming sensor, upper/lower	■	–
RGB LED function illumination + status illumination	■	–
Setting the RTC operating mode	■	–
Value transmitter, 2 objects, button upper/lower	■	–
Light scene extension unit with light scene memory function	■	–
Step switch, button pair	■	–
Step switch, button upper/lower	■	–
Multiple operation, button upper/lower	■	–
IR remote control channels (up to 5 channels)	■	–
Room temperature controller only		
Temperature reading	–	■
RTC settings	–	■
Illuminated display	–	■
Fan coil operation for heating and cooling	–	■
10 logic channels (incl. light scene, actuator, sequence actuator, logic gates, etc.)	■	■
Busch-Watchdog 4 channels	–	–

■ = Function is supported

– = Function is not supported

Program	**Zenit**		
	6125/98-509 1/2 gang	6126/98-509 2/4 gang	6129/98-509 3/6 gang
KNX function			
Switching, button pair	■	■	■
Switching, button upper/lower	■	■	■
Dimming, button pair	■	■	■
Dimming, button upper/lower	■	■	■
Blind, button pair	■	■	■
Blind, button upper/lower	■	■	■
Short-long operation, button upper/lower	■	■	■
Value transmitter, button pair	■	■	■
Value transmitter, button upper/lower	■	■	■
Value dimming sensor, button pair	■	■	■
Value dimming sensor, upper/lower	■	■	■
RGB LED function illumination + status illumination	■	■	■
Setting the RTC operating mode	■	■	■
Value transmitter, 2 objects, button upper/lower	■	■	■
Light scene extension unit with light scene memory function	■	■	■
Step switch, button pair	■	■	■
Step switch, button upper/lower	■	■	■
Multiple operation, button upper/lower	■	■	■
IR remote control channels (up to 5 channels)	–	–	–
Room temperature controller only			
Temperature reading	–	–	–
RTC settings	–	–	–
Illuminated display	–	–	–
Fan coil operation for heating and cooling	–	–	–
10 logic channels (incl. light scene, actuator, sequence actuator, logic gates, etc.)	■	■	■
Busch-Watchdog 4 channels	–	–	–

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	**Zenit**	
	6129/98-509 3/6 gang with IR	6124/88-509
KNX function		
Switching, button pair	■	–
Switching, button upper/lower	■	–
Dimming, button pair	■	–
Dimming, button upper/lower	■	–
Blind, button pair	■	–
Blind, button upper/lower	■	–
Short-long operation, button upper/lower	■	–
Value transmitter, button pair	■	–
Value transmitter, button upper/lower	■	–
Value dimming sensor, button pair	■	–
Value dimming sensor, upper/lower	■	–
RGB LED function illumination + status illumination	■	–
Setting the RTC operating mode	■	–
Value transmitter, 2 objects, button upper/lower	■	–
Light scene extension unit with light scene memory function	■	–
Step switch, button pair	■	–
Step switch, button upper/lower	■	–
Multiple operation, button upper/lower	■	–
IR remote control channels (up to 5 channels)	■	–
Room temperature controller only		
Temperature reading	–	■
RTC settings	–	■
Illuminated display	–	■
Fan coil operation for heating and cooling	–	■
10 logic channels (incl. light scene, actuator, sequence actuator, logic gates, etc.)	■	■
Busch-Watchdog 4 channels	–	–

■ = Function is supported

– = Function is not supported

Program	**Multifunction control elements, suitable for KNX bus coupler 6120/12-101 and 6120/13**		
	6125/02 1/2 gang 6126/02 2/4 gang 6127/02 4/8 gang	6129/01 3/6 gang with IR	6128/28 2/4 gang with RTC
KNX function			
Switching, rocker switch total	■	■	■
Switching, rocker switch left/right	■	■	■
Dimming, rocker switch total	■	■	■
Dimming, rocker switch left/right	■	■	■
Blind, rocker switch total	■	■	■
Venetian blind, rocker switch total left/right	■	■	■
Short-long operation, rocker switch left/right	■	■	■
Value sender, rocker switch total	■	■	■
Value sender, rocker switch left/right	■	■	■
Value dimming sensor, rocker switch total	■	■	■
Red/green LED status illumination (red/green/off)	–	–	–
RGB LED function illumination + status illumination	Two LEDs per rocker switch	Two LEDs per rocker switch	Two LEDs per rocker switch
Setting the RTC operating mode	■	■	■
Value sender, 2 objects, rocker switch left/right	■	■	■
Light scene extension unit with light scene memory function	■	■	■
Level switch, rocker switch total	■	■	■
Level switch, rocker switch total left/right	■	■	■
Multiple operation, rocker switch left/right	■	■	■
IR remote control channels (up to 5 channels)	–	■	–
Room temperature controller only			
Temperature reading	–	–	■
RTC settings	–	–	■
Illuminated display	–	–	■
Fan coil operation for heating and cooling	–	–	■
Logic function (including light scenes)	■	■	■
Busch-Watchdog 4 channels	–	–	–
ABB			
basic55®	–	–	–
future® linear	■	■	■
alpha exclusive/nea	–	–	–
Busch-axcent®	■	■	■
solo®	■	■	■
pure stainless steel	■	■	■
carat®	■	■	■
ocean®	–	–	–
All Weather 44	–	–	–

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	ABB Trevion	
	KK/U4.55.1 KK/U4.63.1 KK/U4.70.1	SD/U12.55.1-825 SD/U12.63.1-825 SD/U12.70.1-4015
KNX function		
Switching, rocker switch total	■	■
Switching, rocker switch (2-Button)	■	■
Dimming, rocker switch total	■	■
Dimming, rocker switch (2-Button)	■	■
Sliding Dimming, rocker	■	■
Blind, rocker switch total	■	■
Venetian blind, rocker switch total (2-Button)	■	■
Sliding blinds, rocker	■	■
Switching sequence	■	■
Switching sequence (2-button)	■	■
Light scene extension unit with light scene memory function	■	■
Send value/Multiple operation	■	■
RGB-Control	–	■
Informationpage	–	■
Weekly-Timer	–	■
Alarm	■	■
Room temperature controller		
Internal RTC's	–	2
Temperature reading	–	■
RTC settings	–	■
Illuminated display	–	■
Fan coil operation for heating and cooling	–	■
RGB-Function/Status/Animation-LED	■	–
Internal temperature sensor	■	■
Binary Input/ external temperature sensor	–	■
Logic function (including light scenes)	■	■
Channels (for movement detection)	–	–
ABB Design Ranges		
Busch-balance SI®	■	■
future®/ future® linear	■	■
Busch-axcent®/ Busch-axcent® pur	■	■
solo®	■	■
pure stainless steel	■	■
carat®	■	■
Dynasty	■	■
KNX Data Secure	■	■

■ = Function is supported

– = Function is not supported

Program	**ABB Trevion**		
	64765-xx-500	64764-xx-500	64762-xx-500
KNX function			
Switching, rocker switch total	■	–	–
Switching, rocker switch (2-Button)	■	■	■
Dimming, rocker switch total	■	–	–
Dimming, rocker switch (2-Button)	■	■	■
Sliding Dimming, rocker	■	–	–
Blind, rocker switch total	■	–	–
Venetian blind, rocker switch total (2-Button)	■	■	■
Sliding blinds, rocker	■	–	–
Switching sequence	■	–	–
Switching sequence (2-button)	■	■	■
Light scene extension unit with light scene memory function	■	■	■
Send value/Multiple operation	■	■	■
RGB-Control	–	–	–
Informationpage	–	–	–
Weekly-Timer	–	–	–
Alarm	–	–	–
Room temperature controller			
Internal RTC's	–	–	–
Temperature reading	–	–	–
RTC settings	–	–	–
Illuminated display	–	–	–
Fan coil operation for heating and cooling	–	–	–
RGB-Function/Status/Animation-LED	–	–	–
Internal temperature sensor	–	–	–
Binary Input/ external temperature sensor	–	–	–
Logic function (including light scenes)	■	■	■
Channels (for movement detection)	4	4	4
ABB Design Ranges			
Busch-balance SI®	■	■	■
future®/ future® linear	■	■	■
Busch-axcent®/ Busch-axcent® pur	■	■	■
solo®	■	■	■
pure stainless steel	■	■	■
carat®	■	■	■
Dynasty	■	■	■
KNX Data Secure	■	■	■

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	FM Watchdog with integrated bus coupler	Standard control elements, bus coupler included with package	FM push-button coupling unit with integrated bus coupler	
	6122/10	6125/01 1 gang 6126/01 2 gang 6127/01 4 gang	6108/06 1/2 gang	6108/07 2/4 gang
KNX function				
Switching, rocker switch total	–	■	■	■
Switching, rocker switch left/right	–	–	■	■
Dimming, rocker switch total	–	■	■	■
Dimming, rocker switch left/right	–	–	■	■
Blind, rocker switch total	–	■	■	■
Venetian blind, rocker switch total left/right	–	–	■	■
Short-long operation, rocker switch left/right	–	–	■	■
Value sender, rocker switch total	–	■	■	■
Value sender, rocker switch left/right	–	–	■	■
Value dimming sensor, rocker switch total	–	–	■	■
Red/green LED status illumination (red/green/off)	–	Two LEDs per rocker switch	–	–
RGB LED function illumination + status illumination	–	–	One LED per rocker switch	One LED per rocker switch
Setting the RTC operating mode	–	–	■	■
Value sender, 2 objects, rocker switch left/right	–	■	■	■
Light scene extension unit with light scene memory function	–	■	■	■
Level switch, rocker switch total	–	–	■	■
Level switch, rocker switch total left/right	–	–	■	■
Multiple operation, rocker switch left/right	–	–	–	–
IR remote control channels (up to 5 channels)	–	–	–	–
Room temperature controller only				
Temperature reading	–	–	■	■
RTC settings	–	–	–	–
Illuminated display	–	–	–	–
Fan coil operation for heating and cooling	–	–	–	–
Logic function (including light scenes)	■	–	–	–
Busch-Watchdog 4 channels	■	–	–	–
ABB				
basic55®	–	–	■	■
future® linear	■	■	■	■
alpha exclusive/nea	–	–	–	–
Busch-axcent®	■	■	■	■
solo®	■	■	■	■
pure stainless steel	■	■	■	■
carat®	■	■	■	■
ocean®	–	–	–	–
All Weather 44	–	–	–	–

■ = Function is supported

– = Function is not supported

Program	**FM push-button coupling unit with integrated bus coupler**		
	6108/60 6-fold KNX sensor	6108/06-AP 1/2 gang	6108/07-AP 2/4 gang
KNX function			
Switching, rocker switch total	■	■	■
Switching, rocker switch left/right	–	■	■
Dimming, rocker switch total	■	■	■
Dimming, rocker switch left/right	–	■	■
Blind, rocker switch total	■	■	■
Venetian blind, rocker switch total left/right	–	■	■
Short-long operation, rocker switch left/right	–	■	■
Value sender, rocker switch total	■	■	■
Value sender, rocker switch left/right	–	■	■
Value dimming sensor, rocker switch total	■	■	■
Red/green LED status illumination (red/green/off)		1 LED	–
RGB LED function illumination + status illumination	–	–	–
Setting the RTC operating mode	–	■	■
Value sender, 2 objects, rocker switch left/right	–	■	■
Light scene extension unit with light scene memory function	■	■	■
Level switch, rocker switch total	■	■	■
Level switch, rocker switch total left/right	–	■	■
Multiple operation, rocker switch left/right	–	–	–
IR remote control channels (up to 5 channels)	–	–	–
Room temperature controller only			
Temperature reading	■	–	–
RTC settings	■ (only as slave)	–	–
Illuminated display	–	–	–
Fan coil operation for heating and cooling	■ (only as slave)	–	–
Logic function (including light scenes)	–	–	–
Busch-Watchdog 4 channels	–	–	–
ABB			
basic55®	■	■	■
future® linear	■	■	■
alpha exclusive/nea	■	■	■
Busch-axcent®	■	■	■
solo®	■	■	■
pure stainless steel	■	■	■
carat®	■	■	■
ocean®	–	■	■
All Weather 44	–	■	■

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	FM room temperature controller				
	6108/18	6109/18	6109/28	6109/08	6109/05
Control element					
Standard function	–	–	–	–	–
Additional function	–	–	–	–	–
Indication					
Display	■	■	■	–	–
Actual temperature display	■	■	■	–	–
Status display via text and/or icon	–	■	■	–	–
RTC					
Manual operation	■	■	■	–	–
Heating and/or cooling with/without additional stage	■	■	■	■	■
Fan coil	■	■	■	■	■
Master/slave	■	■	■	master only	master only
Basic load	■	■	■	■	■
Internal and/or external actual temperature sensor	■	■	■	■	external only
Internal actual temperature sensor	■	■	■	■	■
Air quality					
CO_2	–	–	■	–	–
Humidity	–	–	■	–	–
Air pressure	–	–	■	–	–
Universal input/binary input					
Switching/alarm	–	■	■	■	■
Dimming	–	■	■	■	■
Blind	–	■	■	■	■
Value	–	■	■	■	■
Scene	–	■	■	■	■
Switching sequences	–	■	■	■	■
Multi	–	■	■	■	■
Pulse counter	–	■	■	■	■
Universal analogue input e.g. external sensors					
0–10 V (external)	–	■	■	■	■
1–10 V (external)	–	■	■	■	■
Upper/lower threshold value	–	■	■	■	■
Universal input of external temperature sensor (PT1000 or 6226/T)					
Actual temperature sensor	–	■	■	■	■
Temperature limiter	–	■	■	■	■
ABB					
basic55®	■	■	■	■	–
future® linear	■	■	■	■	–
alpha exclusive/nea	–	■	■	■	–
Busch-axcent®	■	■	■	■	–
solo®	■	■	■	■	–
pure stainless steel	■	■	■	■	–
carat®	■	■	■	■	–
ocean®	–	–	–	–	–
All Weather 44	–	–	–	–	–

■ = Function is supported

– = Function is not supported

Program		**ABB tacteo®**			
Square (vert.)	(86 mm x 86 mm)	TB/U1.1.1-CG	TB/U2.4.1-CG	TB/U4.4.1-CG	TB/U6.4.1-CG
Square (horiz.)	(86 mm x 86 mm)		TB/U2.5.1-CG	TB/U4.5.1-CG	TB/U6.5.1-CG
Vertical	(86 mm x 115 mm)	TB/U1.2.1-CG	TB/U2.7.1-CG	TB/U4.7.1-CG	TB/U6.7.1-CG
Horizontal	(115 mm x 86 mm)	TB/U1.3.1-CG	TB/U2.8.1-CG	TB/U4.8.1-CG	TB/U6.8.1-CG
Premium customization		TB/U1-CG	TB/U2-CG	TB/U4-CG	TB/U6-CG
Control element					
Standard function		■	■	■	■
Additional function		■	■	■	■
Indication					
Display		–	–	–	–
Actual temperature display		–	–	–	–
Status display via text and/or icon		–	–	–	–
RTC					
Manual operation		–	–	–	–
Heating and/or cooling with/ without additional stage		–	–	–	–
Fan coil		–	–	–	–
Master/slave		–	–	–	–
Basic load		–	–	–	–
Internal and/or external actual temperature sensor		–	–	–	–
Internal actual temperature sensor		■	■	■	■
Installation					
VDE		■	■	■	■
BS		■	■	■	■
IT	(only as 115 mm x 86 mm)	■	■	■	■
NEMA	(only as 86 mm x 115 mm)	■	■	■	■

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program		**ABB tacteo®**		
Square (vert.)	(86 mm x 86 mm)	TR/U.1.1-CG	TBW/U.1.1-CG	TA/U3.1.1-CG
Square (horiz.)	(86 mm x 86 mm)			
Vertical	(86 mm x 115 mm)	TR/U.2.1-CG	TBW/U.2.1-CG	TA/U3.2.1-CG
Horizontal	(115 mm x 86 mm)	TR/U.3.1-CG	TBW/U.3.1-CG	TA/U3.3.1-CG
Premium customization		TR/U-CG	TBW/U-CG	TA/U3-CG
Control element				
Standard function		■	■	■
Additional function		■	■	–
Indication				
Display		■	–	–
Actual temperature display		■	–	–
Status display via text and/or icon		■	–	–
RTC				
Manual operation		■	–	–
Heating and/or cooling with/ without additional stage		■	–	–
Fan coil		■	–	–
Master/slave		■	–	–
Basic load		■	–	–
Internal and/or external actual temperature sensor		■	–	–
Internal actual temperature sensor		■	■	■
Installation				
VDE		■	■	■
BS		■	■	■
IT	(only as 115 mm x 86 mm)	■	■	■
NEMA	(only as 86 mm x 115 mm)	■	■	■

■ = Function is supported

– = Function is not supported

Program		**ABB tacteo®**		
Vertical	(86 mm x 157 mm)	TB/U12.7.1-CG	TBR/U4.7.1-CG	TSN/U.2.1-CG
Horizontal	(157 mm x 86 mm)	TB/U12.8.1-CG	TBR/U4.8.1-CG	
Premium customization		TB/U12-CG	TBR/U4-CG	TSN/U-CG
Control element				
Standard function		■	■	■
Additional function		■	■	–
Indication				
Display		–	■	–
Actual temperature display		–	■	–
Status display via text and/or icon		–	■	–
RTC				
Manual operation		–	■	–
Heating and/or cooling with/ without additional stage		–	■	–
Fan coil		–	■	–
Master/slave		–	■	–
Basic load		–	■	–
Internal and/or external actual temperature sensor		–	■	–
Internal actual temperature sensor		■	■	■
Installation				
VDE		■	■	■
BS		■	■	■
IT	(only as 157 mm x 86 mm)	–	–	■
NEMA	(only as 86 mm x 157 mm)	■	■	■

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	ABB Tenton®			
	Control Elements	**Operating function with RTC extension unit**	**Room temp. controller with oper. Function**	**RTC w. CO_2/ humidety sens. a. oper. Function**
				
	SB/U8.0.1-xxx SB/U12.0.1-xxx	SBS/U6.0.1-xxx SBS/U10.0.1-xxx	SBR/U6.0.1-xxx SBR/U10.0.1-xxx	SBC/U6.0.1-xxx SBC/U10.0.1-xxx
KNX function Switching, rocker switch total	■	■	■	■
Switching, rocker switch left/right	■	■	■	■
Dimming, rocker switch total	■	■	■	■
Dimming, rocker switch left/right	■	■	■	■
Blind switch rocker tota	■	■	■	■
Blind switch rocker total left/right	■	■	■	■
Short-long operation, switch rocker left/right	■	■	■	■
Value sender rocker switch total	■	■	■	■
Value sender switch rocker left/right	■	■	■	■
Value dimming sensor, switch rocker total	■	■	■	■
Red/green LED status illumination (red/green/off) 1 LED per switch rocker 1 LED per switch rocker	■	■	■	■
RGB LED function illumination + status illumination	■	■	■	■
1 LED per switch rocker	■	■	■	■
Setting the RTC operating mode	■	■	■	■
Value sender, 2 objects, rocker switch left/right	■	■	■	■
Light scene extension unit with light scene memory function	■	■	■	■
Level switch, switch rocker total	■	■	■	■
Level switch, switch rocker total left/right	■	■	■	■
Multiple operation, rocker switch left/right	■	■	■	■
IR remote control channels (up to 13 channels)				
Light scene unit (8 scenes for up to 8 actuators)	■	■	■	■
Light scene unit (10 scenes for up to 10 actuators)	■	■	■	■
Internal RTC function rocker total		■	■	■
Internal RTC function left/right		■	■	■
Programmable shift key				
Proximity function				
Room temperature controller			■	■
Temperature sensor	■	■	■	■
Master/Slave configuration			■	■
Slave configuration		■		
RTC settings			■	■
Base-load operation			■	■
Illuminated display		■	■	■
Fan Coil operation for heating and cooling		■	■	■
CO_2-Mesurement				■
Humidety-Mesurement				■
Drewpoint-management				■
Temperature				■
Device lock	■	■	■	■
Logic function (including light scenes)	■	■	■	■
Busch-Watchdog 4 channels				

Program	**PEONIA®**					
	PEB/U2.0.1-xxx	PEB/U3.0.1-xxx	PEB/U5.0.1-xxx	PEBR/U2.0.1-xxx	PEBR/U3.0.1-xxx	PEBR/U5.0.1-xxx
KNX function						
Switching, rocker switch total	■	■	■	■	■	■
Switching, rocker switch left/right	■	■	■	■	■	■
Dimming, rocker switch total	■	■	■	■	■	■
Dimming, rocker switch left/right	■	■	■	■	■	■
Blind switch rocker total	■	■	■	■	■	■
Blind switch rocker total left/right	■	■	■	■	■	■
Short-long operation, switch rocker left/right	■	■	■	■	■	■
Value sender rocker switch total	■	■	■	■	■	■
Value sender rocker switch left/right	■	■	■	■	■	■
RGB LED function illumination + Status illumination	■	■	■	■	■	■
RGB LED Ambient illumination	■	■	■	■	■	■
Setting the RTC operating mode	■	■	■	■	■	■
Value sender, 2 objects, rocker switch left/right	■	■	■	■	■	■
Light scene extension units with light scene memory function	■	■	■	■	■	■
Step switch, switch rocker total	■	■	■	■	■	■
Step switch, switch rocker left/right	■	■	■	■	■	■
Multiple operation, rocker switch left/right	■	■	■	■	■	■
Proximity function	■	■	■	■	■	■
Energy saving function	■	■	■	■	■	■
Dynamic display	–	–	–	■	■	■
Room temperature controller only						
RTC Capacitive touch button	–	–	–	■	■	■
Vibration feedback	–	–	–	■	■	■
Temperature reading	–	–	–	■	■	■
Single/Master/Slave configuration	–	–	–	■	■	■
RTC setting	–	–	–	■	■	■
Base-load operation	–	–	–	■	■	■
Illumination display	–	–	–	■	■	■
Fan coil operation or heating and cooling	–	–	–	■	■	■
5 Logic channels (incl. Priority, Logic gate, Staircase lighting, Delay, Min/max value transducer, Threshold value hysteresis, Light scene actuator)	■	■	■	■	■	■

—

■ = Function is supported

– = Function is not supported

ABB i-bus® KNX

User Operation – Design Ranges – Functional Overview

Program	Yurika			
				
	YUB/U1.0.1-xxx	YUB/U2.0.1-xxx	YUB/U3.0.1-xxx	YUB/U4.0.1-xxx
KNX function				
Switching, rocker switch total	■	■	■	■
Switching, rocker switch left/right	■	■	■	■
Dimming, rocker switch total	■	■	■	■
Dimming, rocker switch left/right	■	■	■	■
Blind switch rocker total	■	■	■	■
Blind switch rocker total left/right	■	■	■	■
Short-long operation, switch rocker left/right	■	■	■	■
Value sender rocker switch total	■	■	■	■
Value sender rocker switch left/right	■	■	■	■
Setting the RTC operating mode	■	■	■	■
Value sender, 2 objects, rocker switch left/right	■	■	■	■
Light scene extension units with light scene memory function	■	■	■	■
Step switch, switch rocker total	■	■	■	■
Step switch, switch rocker left/right	■	■	■	■
Multiple operation, rocker switch left/right	■	■	■	■
Energy saving function	■	■	■	■
Primary function trigger	■	■	■	■
LCD display digital labelling - Chinese/English/Icon	■	■	■	■
LCD display digital labelling - Left/Center/Right	■	■	■	■
LCD display digital labelling - Status / Orientation illumination	■	■	■	■
LCD display labelling colour: red/green/blue/orange/white	■	■	■	■
LCD Sub display configurable: time / PM2.5 / CO_2 / Humidity / VOC / temperature	–	–	■	■
Room temperature controller only				
Delicated RTC control push button	–	–	–	–
Temperature reading	–	–	–	–
Single/Master/Slave configuration	–	–	–	–
Room Temperature Controller system setting and control	–	–	–	–
Base-load operation	–	–	–	–
Fan coil operation or heating and cooling	–	–	–	–
Variable Refrigerant Flow system control	–	–	–	–
Fresh air system control	–	–	–	–
Three in one RTC controller configuration	–	–	–	–
Additonal functions				
5 Logic channels (incl. Priority, Logic gate, Staircase lighting, Delay, Min/max value transducer, Threshold value hysteresis, Light scene actuator)	■	■	■	■
Hospitality occupancy presence dectection logic	–	–	–	–
Hospitality courtsey function logic	–	–	–	–
Hospitality room status check logic	–	–	–	–

■ = Function is supported

– = Function is not supported

Program	**Yurika**		
	YUBR/U0.0.1-xxx	YUBR/U4.0.1-xxx	YUA/U1.0.1-xxx
KNX function			
Switching, rocker switch total	■	■	■
Switching, rocker switch left/right	■	■	■
Dimming, rocker switch total	■	■	■
Dimming, rocker switch left/right	■	■	■
Blind switch rocker total	■	■	■
Blind switch rocker total left/right	■	■	■
Short-long operation, switch rocker left/right	■	■	■
Value sender rocker switch total	■	■	■
Value sender rocker switch left/right	■	■	■
Setting the RTC operating mode	■	■	■
Value sender, 2 objects, rocker switch left/right	■	■	■
Light scene extension units with light scene memory function	■	■	■
Step switch, switch rocker total	■	■	■
Step switch, switch rocker left/right	■	■	■
Multiple operation, rocker switch left/right	■	■	■
Energy saving function	■	■	■
Primary function trigger	■	■	■
LCD display digital labelling - Chinese/English/Icon	■	■	■
LCD display digital labelling - Left/Center/Right	■	■	■
LCD display digital labelling - Status / Orientation illumination	■	■	■
LCD display labelling colour: red/green/blue/orange/white	■	■	■
LCD Sub display configurable: time / PM2.5 / CO_2 / Humidity / VOC / temperature	■	■	–
Room temperature controller only			
Delicated RTC control push button	■	■	–
Temperature reading	■	■	–
Single/Master/Slave configuration	■	■	–
Room Temperature Controller system setting and control	■	■	–
Base-load operation	■	■	–
Fan coil operation or heating and cooling	■	■	–
Variable Refrigerant Flow system control	■	■	–
Fresh air system control	■	■	–
Three in one RTC controller configuration	■	■	–
Additonal functions			
5 Logic channels (incl. Priority, Logic gate, Staircase lighting, Delay, Min/max value transducer, Threshold value hysteresis, Light scene actuator)	■	■	■
Hospitality occupancy presence dectection logic	■	■	■
Hospitality courtsey function logic	–	–	■
Hospitality room status check logic	–	–	■

—

■ = Function is supported

– = Function is not supported

PEONIA®

All in one for smarter life

PEONIA® is a highly smart panel integrated with lighting, temperature, electric doors and windows, air conditioning, floor heating, scene and proximity sensors.
All these functions make your life smarter and easier than ever.

reddot award 2019
winner

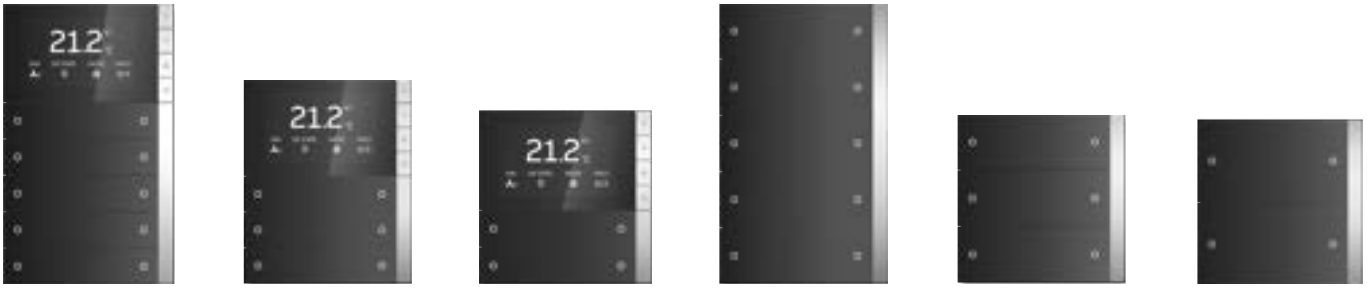

A unique proximity sensor system that can automatically activate the background lights and scenario mode when you are close to the panel. In addition, the in-built sensor can monitor the temperature. Additional information like PM 2.5, VOC and humidity receive from the KNX bus can be displayed. This information can be displayed on the screen directly. When the air quality is bad, the sensor will open the window and air condition system automatically. This brings convenience and comfort to your daily life.

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®

PEBR/U2.0.1-201

PEONIA® Control Element, 2/4-fold with Room Temperature Controller, FM
With integrated bus coupling unit and temperature sensor. Proximity sensor, device locking and energy saving function Switch contact left/right. Replaceable rocker without icon.
Push button function: switching/dimming/blind/value sending/step-type switch/ lightscene/ fan function.
With base-load operation.
The controller is a constant room temperature controller for ventilator convectors (fan-coil) in 2 and 4 pipe system and conventional heating and cooling systems.
The fan stage can be switched manually or automatic mode.
Delicated capactive touch RTC control button with vibration feedback, Single/Master/Slave configuration.
LCD display: Setpoint/actual temperature, Fan speed, Operating state, Operating mode.
Configurable: time, PM2.5, CO_2, Humidity, VOC, temperature, Dynamic animation for dimming, blind, scene.
Individual programmable LED per rocker. Top and bottom ambient LED strip.
LED colour: red/green/yellow/blue/red-orange/violet/white.
Temperature range (device): –5 °C to +45 °C. Dimensions (L x W): 86 mm x 86 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEBR/U2.0.1-002	2TAZ730210R0020		0.212	1
matt White	–	PEBR/U2.0.1-001	2TAZ730210R0010		0.212	1
matt Black	–	PEBR/U2.0.1-201	2TAZ730210R2010		0.212	1
matt Silver	–	PEBR/U2.0.1-131	2TAZ730210R1310		0.212	1
matt Platinum	–	PEBR/U2.0.1-151	2TAZ730210R1510		0.212	1
matt Champagne Gold	–	PEBR/U2.0.1-411	2TAZ730210R4110		0.212	1

PEBR/U3.0.1-201

PEONIA® Control Element 3/6-fold with Room Temperature Controller, FM
With integrated bus coupling unit and temperature sensor.
Proximity sensor, device locking and energy saving function.
Switch contact left/right. Replaceable rocker without icon.
Push button function: switching/dimming/blind/value sending/step-type switch/ lightscene/fan function. With base-load operation.
The controller is a constant room temperature controller for ventilator convectors (fan-coil) in 2 and 4 pipe system and conventional heating and cooling systems. The fan stage can be switched manually or automatic mode.
Delicated capactive touch RTC control button with vibration feedback, Single/Master/Slave configuration.
LCD display: Setpoint/actual temperature, Fan speed, Operating state, Operating mode.
Configurable: time, PM2.5, CO_2, Humidity, VOC, temperature, Dynamic animation for dimming, blind, scene.
Individual programmable LED per rocker. Top and bottom ambient LED strip.
LED colour: red/green/yellow/blue/red-orange/violet/white.
Temperature range (device): –5 °C to +45 °C. Dimensions (L x W): 105 mm x 86 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEBR/U3.0.1-002	2TAZ730310R0020		0.253	1
matt White	–	PEBR/U3.0.1-001	2TAZ730310R0010		0.253	1
matt Black	–	PEBR/U3.0.1-201	2TAZ730310R2010		0.253	1
matt Silver	–	PEBR/U3.0.1-131	2TAZ730310R1310		0.253	1
matt Platinum	–	PEBR/U3.0.1-151	2TAZ730310R1510		0.253	1
matt Champagne Gold	–	PEBR/U3.0.1-411	2TAZ730310R4110		0.253	1

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®

PEBR/U5.0.1-201

PEONIA® Control Element 5/10-fold with Room Temperature Controller, FM
With integrated bus coupling unit and temperature sensor. Proximity sensor, device locking and energy saving function.
Switch contact left/right. Replaceable rocker without icon.
Push button function: switching/dimming/blind/value sending/step-type switch/ lightscene/ fan function.
With base-load operation. The controller is a constant room temperature controller for ventilator convectors (fan-coil).
In 2 and 4 pipe system and conventional heating and cooling systems. The fan stage can be switched manually or automatic mode.
Delicated capactive touch RTC control button with vibration feedback, Single/Master/Slave configuration.
LCD display: Setpoint/actual temperature, Fan speed, Operating state, Operating mode.
Configurable: time, PM2.5, CO_2, Humidity, VOC, temperature, Dynamic animation for dimming, blind, scene.
Individual programmable LED per rocker. Top and bottom ambient LED strip.
LED colour: red/green/yellow/blue/red-orange/violet/white.
Temperature range (device): –5 °C to +45 °C. Dimensions (L x W): 141 mm x 86 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEBR/U5.0.1-002	2TAZ730510R0020		0.284	1
matt White	–	PEBR/U5.0.1-001	2TAZ730510R0010		0.284	1
matt Black	–	PEBR/U5.0.1-201	2TAZ730510R2010		0.284	1
matt Silver	–	PEBR/U5.0.1-131	2TAZ730510R1310		0.284	1
matt Platinum	–	PEBR/U5.0.1-151	2TAZ730510R1510		0.284	1
matt Champagne Gold	–	PEBR/U5.0.1-411	2TAZ730510R4110		0.284	1

PEB/U2.0.1-201

PEONIA® Control Element 2/4-fold, FM
With integrated bus coupling unit and temperature sensor.
Proximity sensor, device locking and energy saving function.
Switch contact left/right. Replaceable rocker without icon.
Push button function: switching/dimming/blind/value sending/step-type switch/lightscene.
Individual programmable LED per rocker. Top and bottom ambient LED strip.
LED colour: red/green/yellow/blue/red-orange/violet/white.
Dimensions (L x W): 86 mm x 86 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEB/U2.0.1-002	2TAZ730200R0020		0.204	1
matt White	–	PEB/U2.0.1-001	2TAZ730200R0010		0.204	1
matt Black	–	PEB/U2.0.1-201	2TAZ730200R2010		0.204	1
matt Silver	–	PEB/U2.0.1-131	2TAZ730200R1310		0.204	1
matt Platinum	–	PEB/U2.0.1-151	2TAZ730200R1510		0.204	1
matt Champagne Gold	–	PEB/U2.0.1-411	2TAZ730200R4110		0.204	1

PEB/U3.0.1-201

PEONIA® Control Element 3/6-fold, FM
With integrated bus coupling unit and temperature sensor.
Proximity sensor, device locking and energy saving function.
Switch contact left/right. Replaceable rocker without icon.
Push button function: switching/dimming/blind/value sending/step-type switch/lightscene.
Individual programmable LED per rocker. Top and bottom ambient LED strip.
LED colour: red/green/yellow/blue/red-orange/violet/white.
Dimensions (L x W): 86 mm x 86 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEB/U3.0.1-002	2TAZ730300R0020		0.205	1
matt White	–	PEB/U3.0.1-001	2TAZ730300R0010		0.205	1
matt Black	–	PEB/U3.0.1-201	2TAZ730300R2010		0.205	1
matt Silver	–	PEB/U3.0.1-131	2TAZ730300R1310		0.205	1
matt Platinum	–	PEB/U3.0.1-151	2TAZ730300R1510		0.205	1
matt Champagne Gold	–	PEB/U3.0.1-411	2TAZ730300R4110		0.205	1

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®

PEB/U5.0.1-201

PEONIA® Control Element 5/10-fold, FM
With integrated bus coupling unit and temperature sensor.
Proximity sensor, device locking and energy saving function.
Switch contact left/right. Replaceable rocker without icon.
Push button function: switching/dimming/blind/value sending/step-type switch/lightscene.
Individual programmable LED per rocker. Top and bottom ambient LED strip.
LED colour: red/green/yellow/blue/red-orange/violet/white.
Dimensions (L x W): 144 mm x 86 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PEB/U5.0.1-002	2TAZ730500R0020		0.275	1
matt White	–	PEB/U5.0.1-001	2TAZ730500R0010		0.275	1
matt Black	–	PEB/U5.0.1-201	2TAZ730500R2010		0.275	1
matt Silver	–	PEB/U5.0.1-131	2TAZ730500R1310		0.275	1
matt Platinum	–	PEB/U5.0.1-151	2TAZ730500R1510		0.275	1
matt Champagne Gold	–	PEB/U5.0.1-411	2TAZ730500R4110		0.275	1

PESX/2.10.1-201

Replaceable rocker without icon for PEONIA® Control Element, PEB/U2.0.1-xxx
Dimensions (L x W): 43 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESX/2.10.1-002	2TAZ730000R0020		0.087	1
matt White	–	PESX/2.10.1-001	2TAZ730000R0010		0.087	1
matt Black	–	PESX/2.10.1-201	2TAZ730000R2010		0.087	1
matt Silver	–	PESX/2.10.1-131	2TAZ730000R1310		0.087	1
matt Platinum	–	PESX/2.10.1-151	2TAZ730000R1510		0.087	1
matt Champagne Gold	–	PESX/2.10.1-411	2TAZ730000R4110		0.087	1

PESB/2.10.1-201

Replaceable rocker with lighting icon for PEONIA® Control Element,PEB/U2.0.1-xxx
Dimensions (L x W): 43 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESB/2.10.1-002	2TAZ730000R0021		0.087	1
matt White	–	PESB/2.10.1-001	2TAZ730000R0011		0.087	1
matt Black	–	PESB/2.10.1-201	2TAZ730000R2011		0.087	1
matt Silver	–	PESB/2.10.1-131	2TAZ730000R1311		0.087	1
matt Platinum	–	PESB/2.10.1-151	2TAZ730000R1511		0.087	1
matt Champagne Gold	–	PESB/2.10.1-411	2TAZ730000R4111		0.087	1

PESD/2.10.1-201

Replaceable rocker with dimming icon for PEONIA® Control Element, PEB/U2.0.1-xxx
Dimensions (L x W): 43 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESD/2.10.1-002	2TAZ730000R0024		0.087	1
matt White	–	PESD/2.10.1-001	2TAZ730000R0014		0.087	1
matt Black	–	PESD/2.10.1-201	2TAZ730000R2014		0.087	1
matt Silver	–	PESD/2.10.1-131	2TAZ730000R1314		0.087	1
matt Platinum	–	PESD/2.10.1-151	2TAZ730000R1514		0.087	1
matt Champagne Gold	–	PESD/2.10.1-411	2TAZ730000R4114		0.087	1

PESJ/2.10.1-201

Replaceable rocker with blind icon for PEONIA® Control Element, PEB/U2.0.1-xxx
Dimensions (L x W): 43 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESJ/2.10.1-002	2TAZ730000R0023		0.087	1
matt White	–	PESJ/2.10.1-001	2TAZ730000R0013		0.087	1
matt Black	–	PESJ/2.10.1-201	2TAZ730000R2013		0.087	1
matt Silver	–	PESJ/2.10.1-131	2TAZ730000R1313		0.087	1
matt Platinum	–	PESJ/2.10.1-151	2TAZ730000R1513		0.087	1
matt Champagne Gold	–	PESJ/2.10.1-411	2TAZ730000R4113		0.087	1

PESR/2.10.1-201

Replaceable rocker with temperature icon for PEONIA® Control Element, PEB/U2.0.1-xxx
Dimensions (L x W): 43 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESR/2.10.1-002	2TAZ730000R0022		0.087	1
matt White	–	PESR/2.10.1-001	2TAZ730000R0012		0.087	1
matt Black	–	PESR/2.10.1-201	2TAZ730000R2012		0.087	1
matt Silver	–	PESR/2.10.1-131	2TAZ730000R1312		0.087	1
matt Platinum	–	PESR/2.10.1-151	2TAZ730000R1512		0.087	1
matt Champagne Gold	–	PESR/2.10.1-411	2TAZ730000R4112		0.087	1

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®

PESF/2.10.1-201

Replaceable rocker with fan icon for PEONIA® Control Element, PEB/U2.0.1-xxx
Dimensions (L x W): 43 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESF/2.10.1-002	2TAZ730000R0025		0.087	1
matt White	–	PESF/2.10.1-001	2TAZ730000R0015		0.087	1
matt Black	–	PESF/2.10.1-201	2TAZ730000R2015		0.087	1
matt Silver	–	PESF/2.10.1-131	2TAZ730000R1315		0.087	1
matt Platinum	–	PESF/2.10.1-151	2TAZ730000R1515		0.087	1
matt Champagne Gold	–	PESF/2.10.1-411	2TAZ730000R4115		0.087	1

PESZ/2.10.1-201

Replaceable rocker with scene icon for PEONIA® Control Element,PEB/U2.0.1-xxx
Dimensions (L x W): 43 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESZ/2.10.1-002	2TAZ730000R0026		0.087	1
matt White	–	PESZ/2.10.1-001	2TAZ730000R0016		0.087	1
matt Black	–	PESZ/2.10.1-201	2TAZ730000R2016		0.087	1
matt Silver	–	PESZ/2.10.1-131	2TAZ730000R1316		0.087	1
matt Platinum	–	PESZ/2.10.1-151	2TAZ730000R1516		0.087	1
matt Champagne Gold	–	PESZ/2.10.1-411	2TAZ730000R4116		0.087	1

PESX/35.10.1-201

Replaceable rocker without icon for PEONIA® Control Element, PEB/U3.0.1-xxx, PEB/U5.0.1-xxx
Dimensions (L x W): 29 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESX/35.10.1-002	2TAZ730001R0020		0.074	1
matt White	–	PESX/35.10.1-001	2TAZ730001R0010		0.074	1
matt Black	–	PESX/35.10.1-201	2TAZ730001R2010		0.074	1
matt Silver	–	PESX/35.10.1-131	2TAZ730001R1310		0.074	1
matt Platinum	–	PESX/35.10.1-151	2TAZ730001R1510		0.074	1
matt Champagne Gold	–	PESX/35.10.1-411	2TAZ730001R4110		0.074	1

PESB/35.10.1-201

Replaceable rocker with lighting icon for PEONIA® Control Element, PEB/U3.0.1-xxx, PEB/U5.0.1-xxx
Dimensions (L x W): 29 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESB/35.10.1-002	2TAZ730001R0021		0.074	1
matt White	–	PESB/35.10.1-001	2TAZ730001R0011		0.074	1
matt Black	–	PESB/35.10.1-201	2TAZ730001R2011		0.074	1
matt Silver	–	PESB/35.10.1-131	2TAZ730001R1311		0.074	1
matt Platinum	–	PESB/35.10.1-151	2TAZ730001R1511		0.074	1
matt Champagne Gold	–	PESB/35.10.1-411	2TAZ730001R4111		0.074	1

PESD/35.10.1-201

Replaceable rocker with dimming icon for PEONIA® Control Element, PEB/U3.0.1-xxx, PEB/U5.0.1-xxx
Dimensions (L x W): 29 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESD/35.10.1-002	2TAZ730001R0024		0.074	1
matt White	–	PESD/35.10.1-001	2TAZ730001R0014		0.074	1
matt Black	–	PESD/35.10.1-201	2TAZ730001R2014		0.074	1
matt Silver	–	PESD/35.10.1-131	2TAZ730001R1314		0.074	1
matt Platinum	–	PESD/35.10.1-151	2TAZ730001R1514		0.074	1
matt Champagne Gold	–	PESD/35.10.1-411	2TAZ730001R4114		0.074	1

PESJ/35.10.1-201

Replaceable rocker with blind icon for PEONIA® Control Element, PEB/U3.0.1-xxx, PEB/U5.0.1-xxx
Dimensions (L x W): 29 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESJ/35.10.1-002	2TAZ730001R0023		0.074	1
matt White	–	PESJ/35.10.1-001	2TAZ730001R0013		0.074	1
matt Black	–	PESJ/35.10.1-201	2TAZ730001R2013		0.074	1
matt Silver	–	PESJ/35.10.1-131	2TAZ730001R1313		0.074	1
matt Platinum	–	PESJ/35.10.1-151	2TAZ730001R1513		0.074	1
matt Champagne Gold	–	PESJ/35.10.1-411	2TAZ730001R4113		0.074	1

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®

PESR/35.10.1-201

Replaceable rocker with temperature icon for PEONIA® Control Element, PEB/U3.0.1-xxx, PEB/U5.0.1-xxx
Dimensions (L x W): 29 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESR/35.10.1-002	2TAZ730001R0022		0.074	1
matt White	–	PESR/35.10.1-001	2TAZ730001R0012		0.074	1
matt Black	–	PESR/35.10.1-201	2TAZ730001R2012		0.074	1
matt Silver	–	PESR/35.10.1-131	2TAZ730001R1312		0.074	1
matt Platinum	–	PESR/35.10.1-151	2TAZ730001R1512		0.074	1
matt Champagne Gold	–	PESR/35.10.1-411	2TAZ730001R4112		0.074	1

PESF/35.10.1-201

Replaceable rocker with fan icon for PEONIA® Control Element, PEB/U3.0.1-xxx, PEB/U5.0.1-xxx
Dimensions (L x W): 29 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESF/35.10.1-002	2TAZ730001R0025		0.074	1
matt White	–	PESF/35.10.1-001	2TAZ730001R0015		0.074	1
matt Black	–	PESF/35.10.1-201	2TAZ730001R2015		0.074	1
matt Silver	–	PESF/35.10.1-131	2TAZ730001R1315		0.074	1
matt Platinum	–	PESF/35.10.1-151	2TAZ730001R1515		0.074	1
matt Champagne Gold	–	PESF/35.10.1-411	2TAZ730001R4115		0.074	1

PESZ/35.10.1-201

Replaceable rocker with scene icon for PEONIA® Control Element, PEB/U3.0.1-xxx, PEB/U5.0.1-xxx
Dimensions (L x W): 29 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESZ/35.10.1-002	2TAZ730001R0026		0.074	1
matt White	–	PESZ/35.10.1-001	2TAZ730001R0016		0.074	1
matt Black	–	PESZ/35.10.1-201	2TAZ730001R2016		0.074	1
matt Silver	–	PESZ/35.10.1-131	2TAZ730001R1316		0.074	1
matt Platinum	–	PESZ/35.10.1-151	2TAZ730001R1516		0.074	1
matt Champagne Gold	–	PESZ/35.10.1-411	2TAZ730001R4116		0.074	1

PESX/235.10.1-201

Replaceable rocker without icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx
Dimensions (L x W): 18 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESX/235.10.1-002	2TAZ730010R0020		0.065	1
matt White	–	PESX/235.10.1-001	2TAZ730010R0010		0.065	1
matt Black	–	PESX/235.10.1-201	2TAZ730010R2010		0.065	1
matt Silver	–	PESX/235.10.1-131	2TAZ730010R1310		0.065	1
matt Platinum	–	PESX/235.10.1-151	2TAZ730010R1510		0.065	1
matt Champagne Gold	–	PESX/235.10.1-411	2TAZ730010R4110		0.065	1

PESB/235.10.1-201

Replaceable rocker with lighting icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx
Dimensions (L x W): 18 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESB/235.10.1-002	2TAZ730010R0021		0.065	1
matt White	–	PESB/235.10.1-001	2TAZ730010R0011		0.065	1
matt Black	–	PESB/235.10.1-201	2TAZ730010R2011		0.065	1
matt Silver	–	PESB/235.10.1-131	2TAZ730010R1311		0.065	1
matt Platinum	–	PESB/235.10.1-151	2TAZ730010R1511		0.065	1
matt Champagne Gold	–	PESB/235.10.1-411	2TAZ730010R4111		0.065	1

PESD/235.10.1-201

Replaceable rocker with dimming icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx
Dimensions (L x W): 18 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESD/235.10.1-002	2TAZ730010R0024		0.065	1
matt White	–	PESD/235.10.1-001	2TAZ730010R0014		0.065	1
matt Black	–	PESD/235.10.1-201	2TAZ730010R2014		0.065	1
matt Silver	–	PESD/235.10.1-131	2TAZ730010R1314		0.065	1
matt Platinum	–	PESD/235.10.1-151	2TAZ730010R1514		0.065	1
matt Champagne Gold	–	PESD/235.10.1-411	2TAZ730010R4114		0.065	1

ABB i-bus® KNX

User Operation – Design Ranges – PEONIA®

PESJ/235.10.1-201

Replaceable rocker with blind icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx
Dimensions (L x W): 18 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESJ/235.10.1-002	2TAZ730010R0023		0.065	1
matt White	–	PESJ/235.10.1-001	2TAZ730010R0013		0.065	1
matt Black	–	PESJ/235.10.1-201	2TAZ730010R2013		0.065	1
matt Silver	–	PESJ/235.10.1-131	2TAZ730010R1313		0.065	1
matt Platinum	–	PESJ/235.10.1-151	2TAZ730010R1513		0.065	1
matt Champagne Gold	–	PESJ/235.10.1-411	2TAZ730010R4113		0.065	1

PESR/235.10.1-201

Replaceable rocker with temperature icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx
Dimensions (L x W): 18 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESR/235.10.1-002	2TAZ730010R0022		0.065	1
matt White	–	PESR/235.10.1-001	2TAZ730010R0012		0.065	1
matt Black	–	PESR/235.10.1-201	2TAZ730010R2012		0.065	1
matt Silver	–	PESR/235.10.1-131	2TAZ730010R1312		0.065	1
matt Platinum	–	PESR/235.10.1-151	2TAZ730010R1512		0.065	1
matt Champagne Gold	–	PESR/235.10.1-411	2TAZ730010R4112		0.065	1

PESF/235.10.1-201

Replaceable rocker with fan icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx
Dimensions (L x W): 18 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESF/235.10.1-002	2TAZ730010R0025		0.065	1
matt White	–	PESF/235.10.1-001	2TAZ730010R0015		0.065	1
matt Black	–	PESF/235.10.1-201	2TAZ730010R2015		0.065	1
matt Silver	–	PESF/235.10.1-131	2TAZ730010R1315		0.065	1
matt Platinum	–	PESF/235.10.1-151	2TAZ730010R1515		0.065	1
matt Champagne Gold	–	PESF/235.10.1-411	2TAZ730010R4115		0.065	1

PESZ/235.10.1-201

Replaceable rocker with scene icon for PEONIA® Control Element, PEBR/Ux.0.1-xxx
Dimensions (L x W): 18 mm x 78 mm.
For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
gloss White	–	PESZ/235.10.1-002	2TAZ730010R0026		0.065	1
matt White	–	PESZ/235.10.1-001	2TAZ730010R0016		0.065	1
matt Black	–	PESZ/235.10.1-201	2TAZ730010R2016		0.065	1
matt Silver	–	PESZ/235.10.1-131	2TAZ730010R1316		0.065	1
matt Platinum	–	PESZ/235.10.1-151	2TAZ730010R1516		0.065	1
matt Champagne Gold	–	PESZ/235.10.1-411	2TAZ730010R4116		0.065	1

Yurika

Versatile, Ingenious in one

The ABB Yurika control element portfolio is a solution built on the open KNX standard, perfectly suited for residential, commercial and hospitality environments.
With a people-oriented design experience in mind, the control element looks simple yet is assembled with a combination of LCD screen with physical push buttons to give the user an intuitive operating experience. The control element can be used for various control functions such as lighting, air conditioning, floor heating, electric doors, blinds, and scenes, etc. At the same time, the flexible configuration and display of digital labels furthermore provide good features that can benefit customers in terms of cost and operation.

ABB i-bus® KNX

User Operation – Design Ranges – Yurika

YUB/U1.0.1-001

Control Element, 1/2-fold, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. Push button function: switching/dimming/blind/value sending/step-type switch/light scene. LCD display Individual configurable: digital labelling and status/orientation illumination. LCD display labelling colour: red/green/blue/orange/white.

Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description		Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
			Type code	Order code	€	kg	pc.
white		–	YUB/U1.0.1-001	2TYZ120001R0600			1
silver		–	YUB/U1.0.1-131	2TYZ120001R0300			1
champagne gold		–	YUB/U1.0.1-411	2TYZ120001R0500			1
matt black		–	YUB/U1.0.1-201	2TYZ120001R1000			1
stainless steel	**NEW**	–	YUB/U1.0.1-SS	2TYZ120001R0700			1
antique gold	**NEW**	–	YUB/U1.0.1-AG	2TYZ120001R0900			1
mocha brown	**NEW**	–	YUB/U1.0.1-MB	2TYZ120001R0800			1

YUB/U2.0.1-001

Control Element, 2/4-fold, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. Push button function: switching/dimming/blind/value sending/step-type switch/light scene. LCD display Individual configurable: digital labelling and status/orientation illumination. LCD display labelling colour: red/green/blue/orange/white.

Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description		Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
			Type code	Order code	€	kg	pc.
white		–	YUB/U2.0.1-001	2TYZ120002R0600			1
silver		–	YUB/U2.0.1-131	2TYZ120002R0300			1
champagne gold		–	YUB/U2.0.1-411	2TYZ120002R0500			1
matt black		–	YUB/U2.0.1-201	2TYZ120002R1000			1
stainless steel	**NEW**	–	YUB/U2.0.1-SS	2TYZ120002R0700			1
antique gold	**NEW**	–	YUB/U2.0.1-AG	2TYZ120002R0900			1
mocha brown	**NEW**	–	YUB/U2.0.1-MB	2TYZ120002R0800			1

ABB i-bus® KNX

User Operation – Design Ranges – Yurika

YUB/U3.0.1-001

Control Element, 3/6-fold, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. Push button function: switching/dimming/blind/value sending/step-type switch/light scene. LCD display Individual configurable: digital labelling and status/orientation illumination. LCD display labelling colour: red/green/blue/orange/white.
Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description		Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
			Type code	Order code	€	kg	pc.
white		–	YUB/U3.0.1-001	2TYZ120003R0600			1
silver		–	YUB/U3.0.1-131	2TYZ120003R0300			1
champagne gold		–	YUB/U3.0.1-411	2TYZ120003R0500			1
matt black		–	YUB/U3.0.1-201	2TYZ120003R1000			1
stainless steel	**NEW**	–	YUB/U3.0.1-SS	2TYZ120003R0700			1
antique gold	**NEW**	–	YUB/U3.0.1-AG	2TYZ120003R0900			1
mocha brown	**NEW**	–	YUB/U3.0.1-MB	2TYZ120003R0800			1

YUB/U4.0.1-001

Control Element, 4/8-fold, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. Push button function: switching/dimming/blind/value sending/step-type switch/light scene. LCD display Individual configurable: digital labelling and status/orientation illumination. LCD display labelling colour: red/green/blue/orange/white. LCD Sub display configurable: time, PM2.5, CO_2, Humidity, VOC, temperature.
Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description		Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
			Type code	Order code	€	kg	pc.
white		–	YUB/U4.0.1-001	2TYZ120004R0600			1
silver		–	YUB/U4.0.1-131	2TYZ120004R0300			1
champagne gold		–	YUB/U4.0.1-411	2TYZ120004R0500			1
matt black		–	YUB/U4.0.1-201	2TYZ120004R1000			1
stainless steel	**NEW**	–	YUB/U4.0.1-SS	2TYZ120004R0700			1
antique gold	**NEW**	–	YUB/U4.0.1-AG	2TYZ120004R0900			1
mocha brown	**NEW**	–	YUB/U4.0.1-MB	2TYZ120004R0800			1

YUBR/U0.0.1-001

Room Temperature Controller, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. With base-load operation. The controller is a room temperature controller suitable for ventilator convectors (fan-coil) in 2 and 4 pipe system heating and cooling systems, Variable Refrigerant Flow system (VRF/VRV), Floor heating system and Fresh air system. Fan stage adjustable from the controller. Deliciated RTC control button for easy access, can operate in Single/Master/Slave configuration. LCD display RTC: Setpoint/actual temperature, Fan speed, Operating state, Operating mode. LCD Sub display configurable: time, PM2.5, CO_2, Humidity, VOC, temperature. Temperature range (device): –5 °C to +45 °C. Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description		Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
			Type code	Order code	€	kg	pc.
white		–	YUBR/U0.0.1-001	2TYZ120102R0600			1
silver		–	YUBR/U0.0.1-131	2TYZ120102R0300			1
champagne gold		–	YUBR/U0.0.1-411	2TYZ120102R0500			1
matt black		–	YUBR/U0.0.1-201	2TYZ120102R1000			1
stainless steel	**NEW**	–	YUBR/U0.0.1-SS	2TYZ120102R0700			1
antique gold	**NEW**	–	YUBR/U0.0.1-AG	2TYZ120102R0900			1
mocha brown	**NEW**	–	YUBR/U0.0.1-MB	2TYZ120102R0800			1

YUBR/U4.0.1-001

Room Temperature Controller with 2/4-fold Control Element, FM

Frameless design with integrated bus coupling unit. Switching rockers on left/right with device locking and energy saving function. Push button function: switching/dimming/blind/value sending/step-type switch/light scene. LCD display Individual configurable: digital labelling and status/orientation illumination. With base-load operation. The controller is a room temperature controller suitable for ventilator convectors (fan-coil) in 2 and 4 pipe system heating and cooling systems, Variable Refrigerant Flow system (VRF/VRV), Floor heating system and Fresh air system. Fan stage adjustable from the controller. Deliciated RTC control button for easy access, can operate in Single/Master/Slave configuration. LCD display RTC: Setpoint/actual temperature, Fan speed, Operating state, Operating mode. LCD Sub display configurable: time, PM2.5, CO_2, Humidity, VOC, temperature. LCD display labelling colour: red/green/blue/orange/white. Temperature range (device): –5 °C to +45 °C. Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description		Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
			Type code	Order code	€	kg	pc.
white		–	YUBR/U4.0.1-001	2TYZ120104R0600			1
silver		–	YUBR/U4.0.1-131	2TYZ120104R0300			1
champagne gold		–	YUBR/U4.0.1-411	2TYZ120104R0500			1
matt black		–	YUBR/U4.0.1-201	2TYZ120104R1000			1
stainless steel	**NEW**	–	YUBR/U4.0.1-SS	2TYZ120104R0700			1
antique gold	**NEW**	–	YUBR/U4.0.1-AG	2TYZ120104R0900			1
mocha brown	**NEW**	–	YUBR/U4.0.1-MB	2TYZ120104R0800			1

ABB i-bus® KNX

User Operation – Design Ranges – Yurika

YUA/U1.0.1-001

Room Outside Panel, 1/2-fold, FM **NEW**

Frameless design with integrated bus coupling unit. Switching rockers on left/right with push button function. Hospitality room outside display panel with integrated occupancy presence detection, courtesy function and room status checking logic function. LCD display Individual configurable: digital labelling and status/orientation illumination. LCD display labelling colour: red/green/blue/orange/white.
Dimensions (L x W): 86 mm x 86 mm. For British standard installation only.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	YUA/U1.0.1-001	2TYZ120001R0601			1
silver	–	YUA/U1.0.1-131	2TYZ120101R0301			1
champagne gold	–	YUA/U1.0.1-411	2TYZ120001R0501			1
matt black	–	YUA/U1.0.1-201	2TYZ120001R1001			1
stainless steel	–	YUA/U1.0.1-SS	2TYZ120001R0701			1
antique gold	–	YUA/U1.0.1-AG	2TYZ120001R0901			1
mocha brown	–	YUA/U1.0.1-MB	2TYZ120001R0801			1

Notes

ABB tacteo®
A smart sensor for everything

—

The extra-flat KNX sensor fits into any environment

Flat and theft-proof
The frameless and extra-flat KNX sensor with a diameter of 9.5 mm sits almost flush with the wall and blends harmoniously into any wall design. Peace of mind is provided by the optional removal guard, which protects the KNX sensor from theft.

Secure access control for the hospitality industry

Hotel access control
The ABB tacteo® KNX range offers secure access control for the hospitality industry. It is particularly practical that the sensor performs all of a hotel's management tasks, which can be controlled from a central point such as the reception desk.

The capacitive glass sensors react without contact

Intuitive operation
The capacitive KNX glass sensors react without any touch or contact. When moving your hand towards the sensor, the status lighting switches on automatically. On the other hand, touching the sensor with the entire palm of your hand triggers a preprogrammed function – such as "switching on the light". With a tap of the finger the desired function can be activated. Easy operation is also ensured by the tried-and-tested colour control concept.

ABB i-bus® KNX

User Operation – Design Ranges – ABB tacteo®

Touch Control Element with Bus Coupler, FM

Freely configurable multifunction control element. The icons and/or texts are configured by means of a web configuration tool. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. The bus connection is provided via the enclosed bus terminal.

TB/U1.1.1-CG

1-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U1.1.1-CG	2CKA006300A1538		86x86	1
Premium customization [1]	Go to configurator	TB/U1-CG	2CKA006300A1641		86x86	1



TB/U2.4.1-CG

2-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U2.4.1-CG	2CKA006300A1539		86x86	1
Premium customization [1]	Go to configurator	TB/U2-CG	2CKA006300A1642		86x86	1

TB/U2.5.1-CG

2-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U2.5.1-CG	2CKA006300A1540		86x86	1
Premium customization [1]	Go to configurator	TB/U2-CG	2CKA006300A1642		86x86	1

TB/U4.4.1-CG

4-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U4.4.1-CG	2CKA006300A1541		86x86	1
Premium customization [1]	Go to configurator	TB/U4-CG	2CKA006300A1643		86x86	1

[1] The individual design can be selected via the website:
URL: https://tacteo-configurator.eu.mybuildings.abb.com/

TB/U4.5.1-CG

4-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U4.5.1-CG	2CKA006300A1612		86x86	1
Premium customization [1]	Go to configurator	TB/U4-CG	2CKA006300A1643		86x86	1

TB/U6.4.1-CG

6-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U6.4.1-CG	2CKA006300A1542		86x86	1
Premium customization [1]	Go to configurator	TB/U6-CG	2CKA006300A1644		86x86	1

TB/U6.5.1-CG

6-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U6.5.1-CG	2CKA006300A1602		86x86	1
Premium customization [1]	Go to configurator	TB/U6-CG	2CKA006300A1644		86x86	1

TB/U12.7.1-CG

12-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U12.7.1-CG	2CKA006300A1543		86x157	1
Premium customization [1]	Go to configurator	TB/U12-CG	2CKA006300A1645		86x157	1

TB/U12.8.1-CG

12-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U12.8.1-CG	2CKA006300A1544		157x86	1
Premium customization [1]	Go to configurator	TB/U12-CG	2CKA006300A1645		157x86	1

[1] The individual design can be selected via the website:
URL: https://tacteo-configurator.eu.mybuildings.abb.com/

ABB i-bus® KNX

User Operation – Design Ranges – ABB tacteo®

TBR/U4.7.1-CG

TBR/U4.8.1-CG

Touch Control Element with Room Temperature Controller and Bus Coupler, 4-fold, FM

Freely configurable multifunction control element. The icons and/or texts are configured by means of a web configuration tool. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TBR/U4.7.1-CG	2CKA006300A1545		86x157	1
Premium customization [1]	Go to configurator	TBR/U4-CG	2CKA006300A1648		86x157	1
Standard customization [1]	Go to configurator	TBR/U4.8.1-CG	2CKA006300A1546		157x86	1
Premium customization [1]	Go to configurator	TBR/U4-CG	2CKA006300A1648		157x86	1

TR/U.1.1-CG

Touch Room Temperature Controller with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TR/U.1.1-CG	2CKA006300A1547		86x86	1
Premium customization [1]	Go to configurator	TR/U-CG	2CKA006300A1647		86x86	1

[1] The individual design can be selected via the website:
URL: https://tacteo-configurator.eu.mybuildings.abb.com/

TBW/U.1.1-CG

Busch-Watchdog® 180 Sensor Standard with Bus Coupler, FM

Ordering possible only in connection with the design ID. Movement detector with up to 4 channels. The bus can be connected via enclosed terminal block. With integrated temperature sensor. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TBW/U.1.1-CG	2CKA006300A1548		86x86	1
Premium customization [1]	Go to configurator	TBW/U-CG	2CKA006300A1654		86x86	1

TA/U3.1.1-CG

Room Outdoor Sensor with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Freely programmable function ”Do not disturb“, ”Bell“ and ”Make up room“. Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. The bus connection is provided via the enclosed bus terminal.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TA/U3.1.1-CG	2CKA006300A1549		86x86	1
Premium customization [1]	Go to configurator	TA/U3-CG	2CKA006300A1646		86x86	1

TSN/U.2.1-CG

Room Outdoor Sensor with Room Number and Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Freely programmable function ”Do not disturb“, ”Bell“ and ”Make up room“. With backlit room number. Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. The bus connection is provided via the enclosed bus terminal. The device requires a 12...24 V AC/DC external power supply to ensure its operation even with bus voltage failure.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TSN/U.2.1-CG	2CKA006300A1603		86x157	1
Premium customization [1] [2]	Go to configurator	TSN/U-CG	2CKA006300A1653		86x157	1

[1] The individual design can be selected via the website:
URL: https://tacteo-configurator.eu.mybuildings.abb.com/

ABB i-bus® KNX

User Operation – Design Ranges – ABB tacteo®

Touch Control Element with Bus Coupler, FM

Freely configurable multifunction control element. The icons and/or texts are configured by means of a web configuration tool. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. The bus connection is provided via the enclosed bus terminal.

TB/U1.3.1-CG

1-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U1.3.1-CG	2CKA006300A1590		115x86	1
Premium customization [1] [2]	Go to configurator	TB/U1-CG	2CKA006300A1641		115x86	1

TB/U2.8.1-CG

2-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U2.8.1-CG	2CKA006300A1579		115x86	1
Premium customization [1] [2]	Go to configurator	TB/U2-CG	2CKA006300A1642		115x86	1

TB/U4.8.1-CG

4-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U4.8.1-CG	2CKA006300A1593		115x86	1
Premium customization [1] [2]	Go to configurator	TB/U4-CG	2CKA006300A1643		115x86	1

TB/U6.8.1-CG

6-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U6.8.1-CG	2CKA006300A1594		115x86	1
Premium customization [1] [2]	Go to configurator	TB/U6-CG	2CKA006300A1644		115x86	1

[1] The individual design can be selected via the website:
URL: https://tacteo-configurator.eu.mybuildings.abb.com/

TR/U.3.1-CG

Touch Room Temperature Controller with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Control element with room thermostat function for controlling TSA/K 230.1, TSA/K 24.1 in connection with KNX-Heating actuator, commercially available valve drives or analogue valve drives (continuous controllers). The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TR/U.3.1-CG	2CKA006300A1595		115x86	1
Premium customization [1] [2]	Go to configurator	TR/U-CG	2CKA006300A1647		115x86	1

TBW/U.3.1-CG

Busch-Watchdog® 180 Sensor Standard with Bus Coupler, FM

Ordering possible only in connection with the design ID. Movement detector with up to 4 channels. The bus can be connected via enclosed terminal block. With integrated temperature sensor. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TBW/U.3.1-CG	2CKA006300A1596		115x86	1
Premium customization [1] [2]	Go to configurator	TBW/U-CG	2CKA006300A1654		115x86	1

TA/U3.3.1-CG

Room Outdoor Sensor with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Freely programmable function ”Do not disturb“, ”Bell“ and ”Make up room“. Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. The bus connection is provided via the enclosed bus terminal.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TA/U3.3.1-CG	2CKA006300A1597		115x86	1
Premium customization [1] [2]	Go to configurator	TA/U3-CG	2CKA006300A1646		115x86	1

[1] The individual design can be selected via the website:
URL: https://tacteo-configurator.eu.mybuildings.abb.com/

ABB i-bus® KNX

User Operation – Design Ranges – ABB tacteo®

Touch Control Element with Bus Coupler, FM

Freely configurable multifunction control element. The icons and/or texts are configured by means of a web configuration tool. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. The bus connection is provided via the enclosed bus terminal.

TB/U1.2.1-CG

1-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U1.2.1-CG	2CKA006300A1578		86x115	1
Premium customization [1] [2]	Go to configurator	TB/U1-CG	2CKA006300A1641		86x115	1

TB/U2.7.1-CG

2-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U2.7.1-CG	2CKA006300A1580		86x115	1
Premium customization [1] [2]	Go to configurator	TB/U2-CG	2CKA006300A1642		86x115	1

TB/U4.7.1-CG

4-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U4.7.1-CG	2CKA006300A1581		86x115	1
Premium customization [1] [2]	Go to configurator	TB/U4-CG	2CKA006300A1643		86x115	1

TB/U6.7.1-CG

6-fold

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TB/U6.7.1-CG	2CKA006300A1582		86x115	1
Premium customization [1] [2]	Go to configurator	TB/U6-CG	2CKA006300A1644		86x115	1

[1] The individual design can be selected via the website:
URL: https://tacteo-configurator.eu.mybuildings.abb.com/

TR/U.2.1-CG

Touch Room Temperature Controller with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/ no function assigned) or standard illumination red/green. Control element with room thermostat function for controlling TSA/K 230.1, TSA/K 24.1 in connection with KNX-Heating actuator, commercially available valve drives or analogue valve drives (continuous controllers). The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TR/U.2.1-CG	2CKA006300A1583		86x115	1
Premium customization [1] [2]	Go to configurator	TR/U-CG	2CKA006300A1647		86x115	1

TBW/U.2.1-CG

Busch-Watchdog® 180 Sensor Standard with Bus Coupler, FM

Ordering possible only in connection with the design ID. Movement detector with up to 4 channels. The bus can be connected via enclosed terminal block. With integrated temperature sensor. With integrated KNX bus coupler.

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TBW/U.2.1-CG	2CKA006300A1584		86x115	1
Premium customization [1] [2]	Go to configurator	TBW/U-CG	2CKA006300A1654		86x115	1

[1] The individual design can be selected via the website:
URL: https://tacteo-configurator.eu.mybuildings.abb.com/

ABB i-bus® KNX

User Operation – Design Ranges – ABB tacteo®

TA/U3.2.1-CG

Room Outdoor Sensor with Bus Coupler, FM

Ordering possible only in connection with the design ID. The icons and/or texts are configured by means of a web configuration tool. Freely programmable function ”Do not disturb“, ”Bell“ and ”Make up room“. Push switch function: switching / dimming / blind / sending values / scenes etc. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With integrated KNX bus coupler. With integrated temperature sensor and proximity function. The bus connection is provided via the enclosed bus terminal. The device is mounted exclusively via the Italian flush-mounted device box according to EN60670 (CEI 23-48).

Description	Standard Design ID	Order details		Price 1 piece	Dimensions	Pack unit
		Type code	Order code	€	mm	pc.
Standard customization [1]	Go to configurator	TA/U3.2.1-CG	2CKA006300A1585		86x115	1
Premium customization [1] [2]	Go to configurator	TA/U3-CG	2CKA006300A1646		86x115	1

[1] The individual design can be selected via the website:
URL: https://tacteo-configurator.eu.mybuildings.abb.com/

TZW/U.0.1.CK

Removal protection tool

Tools for the removal of a device with installed removal protection TZE/U.0.11.CK. Installation is carried out on the flush-mounted insert of the device.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	TZW/U.0.1.CK	2CKA006300A1611			

TZE/U.0.1.CK

Removal protection for Control Elements

Prevents the disassembly of ABB Tenton® and Busch tacteo® control elements, room temperature controllers, external room sensors and movement detectors.
The tool with the mounted removal protection is disassembled using mounting tool TZW/U.x.x-CK.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	TZE/U.0.1.CK	2CKA006300A1633			

TZE/U.0.2.CK

Removal protection for access control devices for squared, horizontal and room number glass versions

Prevents the disassembly of ABB tacteo® card holders, card readers and external room sensors with/without card readers and room numbers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	TZE/U.0.2.CK	2CSY245271S3601			

TZE/U.0.3.CK

Removal protection for access control devices for vertical glass versions

Prevents the dismantling of ABB tacteo® card holders, card readers and external room sensors with/without card readers and room numbers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	TZE/U.0.3.CK	2CSY233741S3611			

ABB i-bus® KNX

User Operation – Design Ranges – Busch-priOn®

Busch-priOn® allows you to control and monitor functions for the entire room. Light, scenes, timer, blind control unit, heating control unit – all functions are controlled simply and intuitively via a rotary dial, and freely programmable functions can be called up via the rocker switches.
Busch-priOn® is a non-fixed, modular concept.



Colours that make life easier.
A consistent colour coding concept and durable LED technology make Busch-priOn® extremely easy to operate. The dial lights up in the colours of the coding system, thus providing feedback on the function currently selected. Yellow stands for lighting, blue for the blind control unit, magenta for light scenes and orange for the heating control unit. These colours are also found on the rocker switches of the control element panels.

01

The rotary control element is equipped with a freely programmable button which can be pressed and turned. It can be used to switch and dim individual lamps, but also to switch on whole groups of lamps with one press of a button and vary their brightness continuously via the dial.

Function
Dimming | Blinds | Value | Light scenes | Logic functions | Time functions

Features
Illuminated dial | Colour coding concept | Anti-theft protection | Day/night operation

02

The single control element is equipped with a freely programmable “large” operating button. It can be assigned to one topic and can carry out a maximum of two commands.

Function
Switching | Dimming | Blinds | Value | Buttons | Light scenes | Logic functions | Time functions

Features
Illuminated rocker switch | Colour coding concept | Freely programmable control button | Anti-theft protection | Replaceable labelling symbol (Fig. shows Lighting labelling symbol)

03

The triple control element is equipped with 3 freely programmable control buttons. Each can be assigned to one topic and can carry out a maximum of two commands.

Function
Switching | Dimming | Blinds | Value | Buttons | Light scenes | Logic functions | Time functions

Features
Illuminated rocker switches | Colour coding concept | Freely programmable control buttons | Anti-theft protection | Replaceable labelling symbol (Fig. shows labelling symbols Lighting, Blinds and Scene)

reddot design award
best of the best 2008

Busch-priOn® received special commendment in the category “best of the best,” winning the “red dot award: communication design 2008” for its interface design.

01 Rotary control element
02 1 gang control element
03 3 gang control element

01

A single-line display with integrated room temperature controller has been designed for the Busch-priOn® 3 gang control element, technically reduced to the basics and optically elegant. It is particularly easy to read due to the monochromatic design for white on black information. The room temperature controller, information function like time and date, up to 17 freely programmable text displays, IR sensor and proximity sensor have been integrated into the display. The design of the display is available in the colour and material “glass black” only.

02

Busch-priOn® is ideal in combination with the carat® switch series, which has surfaces in the same design.

03

The Busch-priOn® flush-mounted movement sensor can be used individually or with other Busch-priOn® modules. Practical because users thus do not have to look for the light switch and are greeted with light when first entering a dark room.

01 3 gang control element with single-line display and temperature controller

02 carat® glass black

03 Flush-mounted movement sensor

ABB i-bus® KNX

User Operation – Design Ranges – Planning aid for Busch-priOn®

End strips without function

studio white,
Article-No. 6348-24G-101-500

glass black,
Article-No. 6348-825-101-500

white glass,
Article-No. 6348-811-101-500

stainless steel,
Article-No. 6348-860-101-500

Support frame, bus coupler

Bus coupler Busch-priOn®,
Article-No. 6120/12-101

1 gang,
Article-No.
6346/10-101-500

Note:
This power adaptor can supply up to 15 power bus couplers with current.

Power adaptor
REG,
Article-No.
CP-D 24/2.5

Bus coupler Busch-priOn®,
Article-No. 6120/13-500



2 gang,
Article-No.
6346/11-101-500



3 gang,
Article-No.
6346/12-101-500

End strip

Commissioning adaptor,
Article-No. 6149/21-500

End strips without function

studio white,
Article-No. 6349-24G-101-500

white glass,
Article-No. 6349-811-101-500

glass black,
Article-No. 6349-825-101-500

stainless steel,
Article-No. 6349-860-101-500

End strip with IR proximity function

glass black,
Article-No.
6350-825-101-500

Note:
only combinable with 3 gang control element

Single-line display and room thermostat,
Article-No.
6351-825-101-500

Control element,
1 gang,
Article-No.
6340-825-101-500

Control element,
3 gang, Article-No.
6342-825-101-500

Rotary control element, 1 gang,
Article-No.
6341-825-101-500

Busch-Watchdog,
180 FM,
Article-No.
6345-825-101-500

Labelling symbols

Labelling inserts for blinds, lighting, RTC and scene. The colours are repeated in the Busch-Jaeger colour concept.

End strips with temperature sensor.

Not combinable with FM actuators.

studio white,
Article-No. 6352-24G-101-500

white glass,
Article-No. 6352-811-101-500

glass black,
Article-No. 6352-825-101-500

stainless steel,
Article-No. 6352-860-101-500

ABB i-bus® KNX

User Operation – Design Ranges – Busch-priOn®

6120/12-101-500

Bus Coupler, FM

for Busch-priOn® support frame 1-fold 6346/10-10x and control elements 6122/0x-xxx, 6124/0x-xxx, 6125/0x-xxx, 6126/0x-xxx, 6127/0x-xxx, 6128/0x-xxx and 6129/0x-xxx.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6120/12-101-500	2CKA006120A0075		0.068	1
swiss version	–	6120/12-101-508	2CKA006120A0076		0.068	1

6120/13-500

Power Bus Coupler, FM, Busch-priOn®

For Busch-priOn® base frame 1-fold, 2-fold and 3-fold. Separate power supply required. The KNX connection is used exclusively for bus communication.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6120/13-500	2CKA006120A0072		0.095	1
swiss version	–	6120/13-508	2CKA006120A0073		0.095	1



6346/10-101-500

Base Frame, 1-fold, Busch-priOn®

For Busch-priOn® for seating and contact connection of rotary control elements, operating element 1-fold and 3-fold as well as the top/bottom finishing strip. For contacting with the Bus Coupler priOn or Power Bus Coupler priOn.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6346/10-101-500	2CKA006310A0135		0.012	1



6346/11-101-500

Base Frame, 2-fold, Busch-priOn®

For Busch-priOn® for seating and contact connection of 8.89 cm (3.5") TFT colour display with rotary control element, rotary control element 1-fold and 3-fold as well as the top/bottom finishing strip. For contacting with the Power Bus Coupler priOn.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6346/11-101-500	2CKA006310A0137		0.116	1



6346/12-101-500

Base Frame, 3-fold, Busch-priOn®

For Busch-priOn® for seating and contact connection of 8.89 cm (3.5") TFT colour display with rotary control element, rotary control element 1-fold and 3-fold as well as the top/bottom finishing strip. For contacting with the Power Bus Coupler priOn.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6346/12-101-500	2CKA006310A0139		0.159	1

6340-825-101-500

Control Element, 1-fold, Busch-priOn®

Freely programmable multi-function operation element for installation in the Base Frame 1-fold, 2-fold or 3-fold. Supports the KNX functions with innovative colour concept on the labelling symbols or standard lighting in red/green. The accompanying symbol can be substituted by other alternative labelling symbols.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6340-24G-101-500	2CKA006310A0109		0.188	1
white glass	–	6340-811-101-500	2CKA006310A0168		0.164	1
glass black	–	6340-825-101-500	2CKA006310A0108		0.145	1
stainless steel	–	6340-866-101-500	2CKA006310A0106		0.325	1

6342-825-101-500

Control Element, 3-fold, Busch-priOn®

Freely programmable multi-function operation element for installation in the Base Frame 1-fold, 2-fold or 3-fold. Supports the KNX functions with innovative colour concept on the labelling symbols or standard lighting in red/green. The accompanying symbol can be substituted by other alternative labelling symbols.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6342-24G-101-500	2CKA006310A0125		0.191	1
white glass	–	6342-811-101-500	2CKA006310A0172		0.203	1
glass black	–	6342-825-101-500	2CKA006310A0124		0.203	1
stainless steel	–	6342-866-101-500	2CKA006310A0122		0.32	1

6341-825-101-500

Rotary Control Element, 1-fold, Busch-priOn®

Freely programmable multi-function rotary control element for installation in the Base Frame 1-fold, 2-fold or 3-fold. Supports the KNX functions with innovative colour concept on the rotary knob or standard lighting in red/green. Rotary knob stainless steel.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6341-24G-101-500	2CKA006310A0117		0.218	1
white glass	–	6341-811-101-500	2CKA006310A0170		0.23	1
glass black	–	6341-825-101-500	2CKA006310A0116		0.175	1
stainless steel	–	6341-866-101-500	2CKA006310A0114		0.336	1

ABB i-bus® KNX

User Operation – Design Ranges – Busch-priOn®

6345-825-101-500

Busch Watchdog® 180 FM Sensor, Busch-priOn®

Sends switching commands with motion detection in combination with the bus coupler Busch-priOn®. Programmable via ETS for automatic and semi-automatic operation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6345-24G-101-500	2CKA006310A0081		0.188	1
white glass	–	6345-811-101-500	2CKA006310A0176		0.166	1
glass black	–	6345-825-101-500	2CKA006310A0080		0.167	1
stainless steel	–	6345-866-101-500	2CKA006310A0078		0.325	1

6348-825-101-500

Top End Strip, Busch-priOn®

For mounting on Base Frame 1-fold to 3-fold.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6348-24G-101-500	2CKA006310A0147		0.024	1
white glass	–	6348-811-101-500	2CKA006310A0178		0.034	1
glass black	–	6348-825-101-500	2CKA006310A0146		0.027	1
stainless steel	–	6348-860-101-500	2CKA006310A0144		0.048	1

6350-825-101-500

Top End Strip with IR Receiver and Proximity Sensor, Busch-priOn®

For mounting on Base Frame 1-fold to 3-fold. With integrated IR receiver for control by IR handheld control as well as integrated proximity function.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	6350-825-101-500	2CKA006310A0157		0.037	1

6349-825-101-500

Bottom End Strip, without logo, Busch-priOn®
For mounting on Base Frame 1-fold to 3-fold.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6349-24G-101-500	2CKA006310A0155		0.024	1
white glass	–	6349-811-101-500	2CKA006310A0180		0.035	1
glass black	–	6349-825-101-500	2CKA006310A0154		0.027	1
stainless steel	–	6349-860-101-500	2CKA006310A0152		0.048	1

6352-825-101-500

Bottom End Strip with Temperature Sensor, Busch-priOn®
For mounting on Base Frame 1-fold to 3-fold. Provides the value measured by the temperature sensor to the 8.89 cm (3.5") TFT colour display or the room thermostat.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
studio white, high gloss	–	6352-24G-101-500	2CKA006310A0165		0.024	1
white glass	–	6352-811-101-500	2CKA006310A0182		0.04	1
glass black	–	6352-825-101-500	2CKA006310A0164		0.024	1
stainless steel	–	6352-860-101-500	2CKA006310A0162		0.048	1

6351/08-825-500

Top End Strip with Display, Room Thermostat, IR Receiver and Proximity Sensor, Busch-priOn®
Top end strip for installation on 1 gang to 3 gang support frame (6346/10-101, 6346/11-101 and 6346/12-101). With integrated IR receiver for control using the Busch remote control 6010-25 or 6020-.../6121... and integrated proximity function. For heating and cooling (PI, PWM or 2-point). For control of up to 5-level ventilation actuators. With manual adjustment of fan levels. Master/slave configuration. With base-load operation. Display of up to 17 functions as text and/or icon. Only in connection with 1 gang rotary control element (6341-xxx-101) and 3 gang control element (6342-xxx-101) possible. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Detection range: frontal: 0.5 m, lateral: 0.5 m. Detection angle: 100°. Mounting height: 1.1 m. Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C.
Dimensions (L x W x D): 33.4 mm x 106.6 mm x 15.5 mm

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	6351/08-825-500	2CKA006310A0183		0.064	1

ABB i-bus® KNX

User Operation – Design Ranges – Busch-priOn®

6353/20-860-500

Inscription Symbols, Busch-priOn®

For Busch-priOn® operating element 1-fold to 3-fold with different symbols.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
lighting	–	6353/20-860-500	2CKA006310A0093		0.011	1
blind	–	6353/30-860-500	2CKA006310A0094		0.011	1
Room Temperature	–	6353/40-860-500	2CKA006310A0095		0.011	1
scene	–	6353/50-860-500	2CKA006310A0096		0.011	1

6149/21-500

Commissioning Interface/Adapter

6120/12-101-500 and 6120/13-500 via USB port or via SD card slot.
With integrated battery for independent operation for up to 8 h.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6149/21-500	2CKA006133A0201		0.15	1

CP-D 24/2.5

Power Supply Unit, 24 V DC, 2.5 A

For ABB SmartTouch® 10" ST/U10.4.1-xx, Busch-priOn® Power Bus Coupler 6120/13-500 and KNX APP-Control Server CT/S 2.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CP-D 24/2.5	2CDG120037R0011		0.252	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®

Living and working with a feeling of well-being.
And here the air in the room is one of the most important factors. Because the body takes an ideal temperature for granted and therefore easily reacts to changes. Heated or air-conditioned rooms can be optimally adjusted – to a consistently pleasant ambience.

The KNX ABB Tenton® for stand-alone applications.
The ABB Tenton® with display is a room temperature controller for ventilator convectors or conventional systems for heating and cooling. This option offers complete air-conditioning for rooms. The temperature can be adjusted precisely for personal comfort. The fan speeds can be selected by push buttons. Even very large rooms can be heated or cooled to a comfortable temperature quickly – with additional air-conditioning units. The KNX ABB Tenton® can be operated individually. The bus coupler is integrated into the control element.

Function
- Temperature sensor
- RTC setting
- Illuminated display
- Fan Coil operation for heating and cooling

Features
- Very easy to operate with large, clear display
- Complete air conditioning
- Fan speeds can be manually selected
- Integrated bus coupler
- Surface-mounted, independent switching program
- Available in four modern colours

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®

SBS/U6.0.1-84

Control Element with RTC Slave Unit, 6-fold

Freely configurable multifunction control element. Room Thermostat slave with max. 6 gang control. With labelling field. Transparent labelling sheet with standard symbols included in delivery. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With integrated temperature sensor. With actual value temperature display. With display of set-value temperature. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBS/U6.0.1-84	2CKA006330A0002			1
studio white matt	–	SBS/U6.0.1-884	2CKA006330A0036			1
black matt	–	SBS/U6.0.1-885	2CKA006330A0037			1
aluminium silver	–	SBS/U6.0.1-83	2CKA006330A0038			1

SBR/U6.0.1-84

Room Temperature Controller with Control Element, 6-fold

Freely configurable multifunction control element. With integrated KNX bus coupler. With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Push switch function: switching / dimming / blind / sending values / scenes etc. For activating heating, ventilation and fan coil actuators. Master/slave configuration. With base-load operation. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBR/U6.0.1-84	2CKA006330A0004			1
studio white matt	–	SBR/U6.0.1-884	2CKA006330A0042			1
black matt	–	SBR/U6.0.1-885	2CKA006330A0043			1
aluminium silver	–	SBR/U6.0.1-83	2CKA006330A0044			1

SBS/U10.0.1-84

Control Element with RTC Slave Unit, 10-fold

Freely configurable multifunction control element. With labelling field. Transparent labelling sheet with standard symbols included in delivery. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=-neutral/no function assigned) or standard illumination red/green. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). With integrated temperature sensor. With actual value temperature display. With display of set-value temperature. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBS/U10.0.1-84	2CKA006330A0006			1
studio white matt	–	SBS/U10.0.1-884	2CKA006330A0048			1
black matt	–	SBS/U10.0.1-885	2CKA006330A0049			1
aluminium silver	–	SBS/U10.0.1-83	2CKA006330A0050			1

SBR/U10.0.1-84

Room Temperature Controller with Control Element, 10-fold

Freely configurable multifunction control element. With integrated KNX bus coupler. With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Push switch function: switching / dimming / blind / sending values / scenes etc. Master/slave configuration. With base-load operation. The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SBR/U10.0.1-84	2CKA006330A0008			1
studio white matt	–	SBR/U10.0.1-884	2CKA006330A0054			1
black matt	–	SBR/U10.0.1-885	2CKA006330A0055			1
aluminium silver	–	SBR/U10.0.1-83	2CKA006330A0056			1

SBC/U6.0.1-84

RTC with CO_2/Humidity Sensor and Control Element

Control element with room temperature controller function and CO_2/moisture/air pressure sensor. With integrated KNX bus coupler. With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. Push switch function: switching / dimming / blind / sending values / scenes etc. For activating heating, ventilation and fan coil actuators. Master/slave configuration. With base-load operation. The fan stage can be switched manually or in automatic mode. Class of temperature controller 1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white, 6-fold	–	SBC/U6.0.1-84	2CKA006330A0010			1
studio white matt, 6-fold	–	SBC/U6.0.1-884	2CKA006330A0060			1
black matt, 6-fold	–	SBC/U6.0.1-885	2CKA006330A0061			1
aluminium silver, 6-fold	–	SBC/U6.0.1-83	2CKA006330A0062			1
davos/studio white, 10-fold	–	SBC/U10.0.1-84	2CKA006330A0012			1
studio white matt, 10-fold	–	SBC/U10.0.1-884	2CKA006330A0066			1
black matt, 10-fold	–	SBC/U10.0.1-885	2CKA006330A0067			1
aluminium silver, 10-fold	–	SBC/U10.0.1-83	2CKA006330A0068			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®

SB/U8.0.1-84

Control Element

With integrated KNX bus coupler. With labelling field. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green.
Push switch function: switching / dimming / blind / sending values / scenes etc.
With integrated temperature sensor. Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white, 8-fold	–	SB/U8.0.1-84	2CKA006330A0014			1
studio white matt, 8-fold	–	SB/U8.0.1-884	2CKA006330A0072			1
black matt, 8-fold	–	SB/U8.0.1-885	2CKA006330A0073			1
aluminium silver, 8-fold	–	SB/U8.0.1-83	2CKA006330A0074			1
davos/studio white, 12-fold	–	SB/U12.0.1-84	2CKA006330A0016			1
studio white matt, 12-fold	–	SB/U12.0.1-884	2CKA006330A0078			1
black matt, 12-fold	–	SB/U12.0.1-885	2CKA006330A0079			1
aluminium silver, 12-fold	–	SB/U12.0.1-83	2CKA006330A0080			1

SAS/A.0.1-84

Support Frame, small, SM

Surface-mounted housing for mounting 8 gang control element, RT with 6 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SAS/A.0.1-84	2CKA006330A0018			1
studio white matt	–	SAS/A.0.1-884	2CKA006330A0084			1
black matt	–	SAS/A.0.1-885	2CKA006330A0085			1
aluminium silver	–	SAS/A.0.1-83	2CKA006330A0086			1

SAB/A.0.1-84

Support Frame, large, SM

Surface-mounted housing for mounting 12 gang control element, RT with 10 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SAB/A.0.1-84	2CKA006330A0020			1
studio white matt	–	SAB/A.0.1-884	2CKA006330A0090			1
black matt	–	SAB/A.0.1-885	2CKA006330A0091			1
aluminium silver	–	SAB/A.0.1-83	2CKA006330A0092			1

SLS/A.0.1-84

Cover for Label Area, small, RTC

Marking coverplate for RTR with 6 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLS/A.0.1-84	2CKA006330A0022			1
studio white matt	–	SLS/A.0.1-884	2CKA006330A0097			1
black matt	–	SLS/A.0.1-885	2CKA006330A0098			1
aluminium silver	–	SLS/A.0.1-83	2CKA006330A0099			1

SLM/A.0.1-84

Cover for Label Area, Control Element, small

Marking coverplate for 8 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLM/A.0.1-84	2CKA006330A0024			1
studio white matt	–	SLM/A.0.1-884	2CKA006330A0105			1
black matt	–	SLM/A.0.1-885	2CKA006330A0106			1
aluminium silver	–	SLM/A.0.1-83	2CKA006330A0107			1

SLB/A.0.1-84

Cover for Label Area, large, RTC

Upper marking coverplate for RT with 10-fold control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLB/A.0.1-84	2CKA006330A0026			1
studio white matt	–	SLB/A.0.1-884	2CKA006330A0113			1
black matt	–	SLB/A.0.1-885	2CKA006330A0114			1
aluminium silver	–	SLB/A.0.1-83	2CKA006330A0115			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Tenton®

SLX/A.0.1-84

Cover for Label Area, Control Element, large

Marking coverplate for 12 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLX/A.0.1-84	2CKA006330A0028			1
studio white matt	–	SLX/A.0.1-884	2CKA006330A0121			1
black matt	–	SLX/A.0.1-885	2CKA006330A0122			1
aluminium silver	–	SLX/A.0.1-83	2CKA006330A0123			1

SLY/A.0.1-84

Bottom end strips without manufacturer logo

Bottom end strip for mounting on SBC/U, SBR/U, SBS/U and SB/U.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLY/A.0.1-84	2CKA006330A0030			1
studio white matt	–	SLY/A.0.1-884	2CKA006330A0129			1
black matt	–	SLY/A.0.1-885	2CKA006330A0130			1
aluminium silver	–	SLY/A.0.1-83	2CKA006330A0131			1

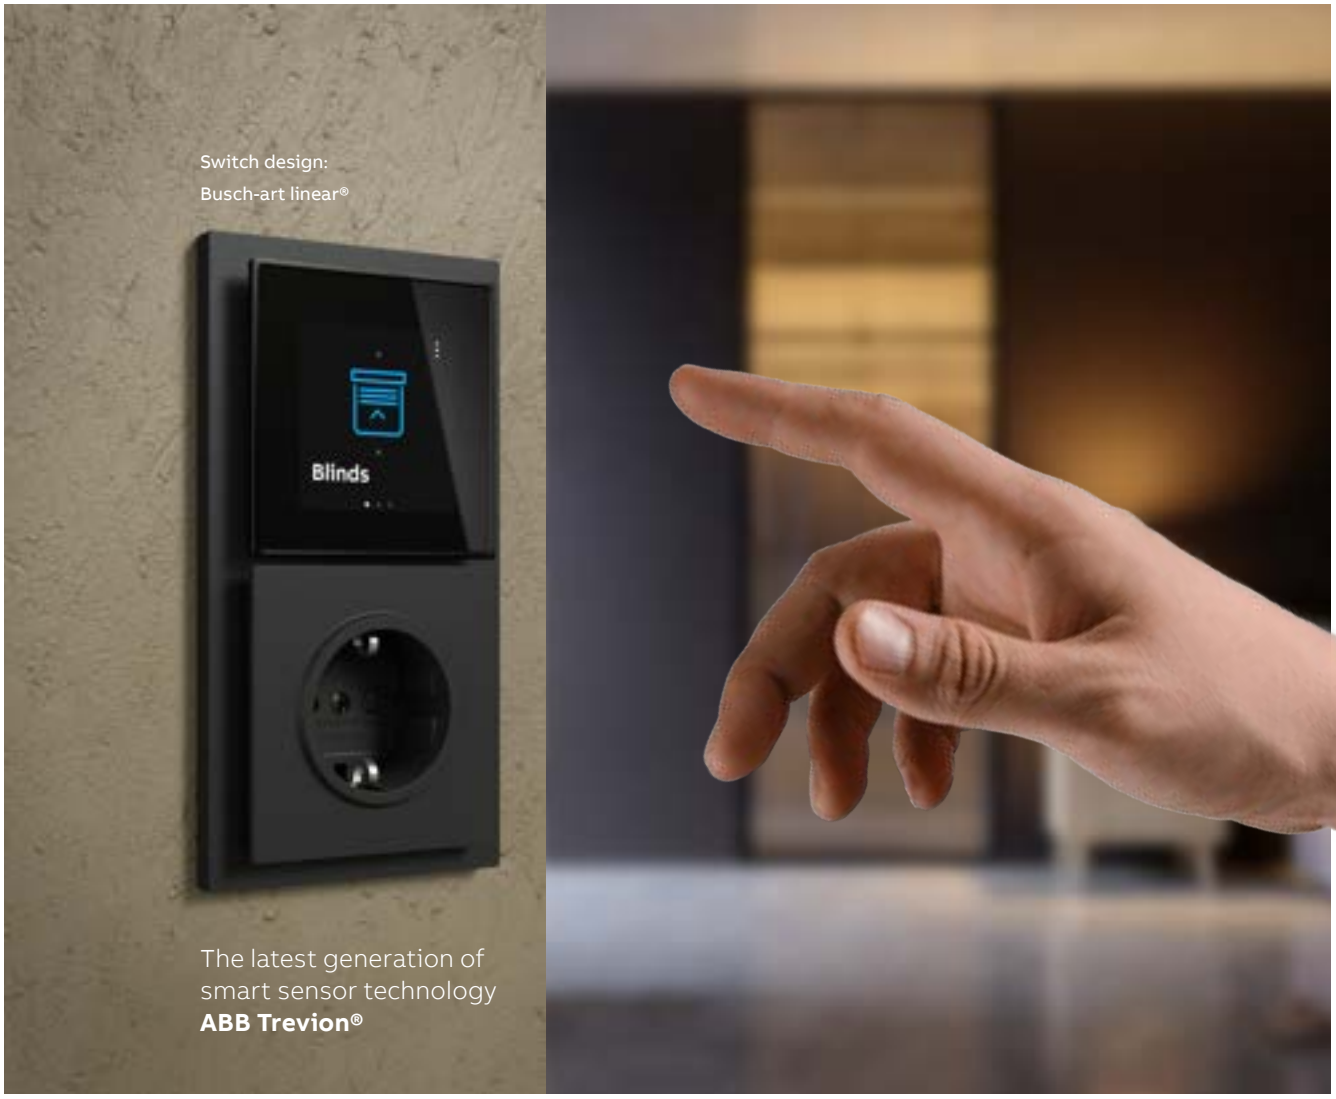

ABB Trevion®
A touch of perfection

Design and functionality have never been so in sync! ABB Trevion®'s display and control elements match many of our switch design ranges. With its innovative swipe - and rotation functions, animated light guide, and customizable display and control elements, it adds a touch of perfection to any home! **solutions.abb/trevion**

Let's write the future. Together.

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® Busch-balance® SI

SD/U12.55.1-825

Touch Display 2.4", 55 x 55 mm, FM
Freely programmable touch panel 1 – up to 12-fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system. Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element. With scene function, logic functions, presence simulation and time programs. The device supports KNX Data Secure.

KNX functions:
- A total 12 control elements are displayed on a maximum of 12 pages
- 12 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4 touch surfaces on one page
- Primary function
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000/6226/T)

External power supply needed: 20-32 V DC (SELV)
Number of bus subscribers: 1
Optional Removal protection: TZE/U.0.xx.CK

Display size: 6.10 cm (2.4")
Display resolution: 240*240
Display screen: IPS display
Dimensions (L x W x D): 55 mm x 55 mm x 32 mm
Display surface: glass black (-825)

Class of temperature controller 1 Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	SD/U12.55.1-825	2TMA310011B0001		0.069	1

KK/U4.55.1

Control Element, 55 x 55 mm
Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback. Communication over separat bus coupler unit (BA/U1.0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind / shutter control, scene.
The device supports KNX Data Secure.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK
Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.55.1	2CKA006115A0506		0.0296	1

BA/U1.0.1

Bus Coupling Unit KNX
KNX bus coupler unit for keypad 1- up to 4-fold devices: KK/U4.55.1, KK/U4.63.1 and KK/U4.70.1.
Bus connection via enclosed terminal block

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	BA/U1.0.1	2CKA006120A0080		0.121	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® Busch-balance® SI

LFW/A.0.55.1-CK

Cover customized

Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.55.1).
Ordering possible only with the unique design ID.
The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFW/A.0.55.1-CK	2CKA006199A0162		0.0076	1

LFW/A.4.55.1-914

Cover without Icon, 1 – 4-fold

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold	–	LFW/A.1.55.1-914	2CKA006199A0170		0.0076	1
2-fold	–	LFW/A.2.55.1-914	2CKA006199A0171		0.0076	1
3-fold	–	LFW/A.3.55.1-914	2CKA006199A0172		0.0076	1
4-fold	–	LFW/A.4.55.1-914	2CKA006199A0173		0.0076	1

LFBT/A.1.55.1-914

Cover with Light Icon, 1-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFBT/A.1.55.1-914	2CKA006199A0174		0.0076	1

LFJT/A.1.55.1-914

Cover with Blind Icon, 1-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJT/A.1.55.1-914	2CKA006199A0175		0.0076	1

LFST/A.1.55.1-914

Cover with Scene Icon, 1-fold Button

Labeling field with one scene icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFST/A.1.55.1-914	2CKA006199A0176		0.0076	1

LFDW/A.1.55.1-914

Cover with Dim Icon, 1-fold Rocker

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFDW/A.1.55.1-914	2CKA006199A0344		0.0076	1

LFJW/A.1.55.1-914

Cover with Blind Icon, 1-fold Rocker

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJW/A.1.55.1-914	2CKA006199A0345		0.0076	1

LFAW/A.1.55.1-914

Cover with Up/Down Icon, 1-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFAW/A.1.55.1-914	2CKA006199A0346		0.0076	1

LFBT/A.2.55.1-914

Cover with Light Icon, 2-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFBT/A.2.55.1-914	2CKA006199A0347		0.0076	1

LFJT/A.2.55.1-914

Cover with Blind Icon, 2-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJT/A.2.55.1-914	2CKA006199A0348		0.0076	1

LFST/A.2.55.1-914

Cover with Scene Icon, 2-fold Button

Labeling field with one scene icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFST/A.2.55.1-914	2CKA006199A0349		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® Busch-balance® SI

LFDW/A.2.55.1-914

Cover with Dim/Blind Icon, 2-fold Rocker

Labeling field with one dimming- and one blind-icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFDW/A.2.55.1-914	2CKA006199A0350		0.0076	1

LFAW/A.2.55.1-914

Cover with Up/Down Icon, 2-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFAW/A.2.55.1-914	2CKA006199A0351		0.0076	1

LFMW/A.4.55.1-914

Cover with Music Icon, 4-fold Button

Labeling field with Stop/Play/Volume icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFMW/A.4.55.1-914	2CKA006199A0352		0.0076	1

CSE/U0.1.1.CK

Removal protection

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CSE/U0.1.1.CK	2CKA006199A0512			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

SD/U12.63.1-825

Touch Display 2.4", 63 x 63 mm, FM
Freely programmable touch panel 1 – up to 12-fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system. Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element. With scene function, logic functions, presence simulation and time programs. The device supports KNX Data Secure.

KNX functions:
- A total 12 control elements are displayed on a maximum of 12 pages.
- 12 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4 touch surfaces on one page
- Primary function
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000/6226/T)

External power supply needed: 20-32 V DC (SELV)
Number of bus subscribers: 1
Optional Removal protection: TZE/U.0.xx.CK

Display size: 6.10 cm (2.4")
Display resolution: 240*240
Display screen: IPS display
Dimensions (L x W x D): 63 mm x 63 mm x 32 mm
Display surface: glass black (-825)

Class of temperature controller 1 Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	SD/U12.63.1-825	2TMA310011B0002		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

KK/U4.63.1

Control Element, 63 x 63 mm
Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback. Communication over separat bus coupler unit (BA/U1.0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind/shutter control, scene.
The device supports KNX Data Secure.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK
Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.63.1	2CKA006115A0504		0.0271	1

BA/U1.0.1

Bus Coupling Unit KNX
KNX bus coupler unit for keypad 1- up to 4-fold devices: KK/U4.55.1, KK/U4.63.1 and KK/U4.70.1.
Bus connection via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	BA/U1.0.1	2CKA006120A0080		0.121	1

LFW/A.0.63.1-CK

Cover customized
Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.63.1.)

Ordering possible only with the unique design ID.
The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
pure plastics	–	LFW/A.0.63.1-CK	2CKA006199A0041		0.0076	1
painted plastics	–	LFW/A.0.63.1-CKL	2CKA006199A0514		0.0076	1

LFW/A.1.63.1-81

Cover without Icon, 1-fold

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.1.63.1-81	2CKA006199A0098		0.0076	1
ivory white	–	LFW/A.1.63.1-82	2CKA006199A0099		0.0076	1
aluminium silver	–	LFW/A.1.63.1-83	2CKA006199A0100		0.0076	1
studio white	–	LFW/A.1.63.1-84	2CKA006199A0101		0.0076	1
studio white matt	–	LFW/A.1.63.1-884	2CKA006199A0102		0.0076	1
black matt	–	LFW/A.1.63.1-885	2CKA006199A0103		0.0076	1
stainless steel	–	LFW/A.1.63.1-866	2CKA006199A0105		0.0076	1

LFW/A.2.63.1-81

Cover with Design Line, 2-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.2.63.1-81	2CKA006199A0107		0.0076	1
aluminium silver	–	LFW/A.2.63.1-83	2CKA006199A0109		0.0076	1
studio white	–	LFW/A.2.63.1-84	2CKA006199A0110		0.0076	1
studio white matt	–	LFW/A.2.63.1-884	2CKA006199A0111		0.0076	1
black matt	–	LFW/A.2.63.1-885	2CKA006199A0112		0.0076	1
stainless steel	–	LFW/A.2.63.1-866	2CKA006199A0114		0.0076	1

LFW/A.3.63.1-81

Cover with Design Line, 3-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.3.63.1-81	2CKA006199A0116		0.0076	1
ivory white	–	LFW/A.3.63.1-82	2CKA006199A0117		0.0076	1
aluminium silver	–	LFW/A.3.63.1-83	2CKA006199A0118		0.0076	1
studio white	–	LFW/A.3.63.1-84	2CKA006199A0119		0.0076	1
studio white matt	–	LFW/A.3.63.1-884	2CKA006199A0120		0.0076	1
black matt	–	LFW/A.3.63.1-885	2CKA006199A0121		0.0076	1
stainless steel	–	LFW/A.3.63.1-866	2CKA006199A0123		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

LFW/A.1.63.1-81

Cover with Design Line, 4-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.4.63.1-81	2CKA006199A0125		0.0076	1
aluminium silver	–	LFW/A.4.63.1-83	2CKA006199A0127		0.0076	1
studio white	–	LFW/A.4.63.1-84	2CKA006199A0128		0.0076	1
studio white matt	–	LFW/A.4.63.1-884	2CKA006199A0129		0.0076	1
black matt	–	LFW/A.4.63.1-885	2CKA006199A0130		0.0076	1
stainless steel	–	LFW/A.4.63.1-866	2CKA006199A0132		0.0076	1

LFBT/A.1.63.1-81

Cover with Light Icon, 1-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFBT/A.1.63.1-81	2CKA006199A0134		0.0076	1
ivory white	–	LFBT/A.1.63.1-82	2CKA006199A0135		0.0076	1
aluminium silver	–	LFBT/A.1.63.1-83	2CKA006199A0136		0.0076	1
studio white	–	LFBT/A.1.63.1-84	2CKA006199A0137		0.0076	1
studio white matt	–	LFBT/A.1.63.1-884	2CKA006199A0138		0.0076	1
black matt	–	LFBT/A.1.63.1-885	2CKA006199A0139		0.0076	1
stainless steel	–	LFBT/A.1.63.1-866	2CKA006199A0141		0.0076	1

LFJT/A.1.63.1-81

Cover with Blind Icon, 1-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFJT/A.1.63.1-81	2CKA006199A0143		0.0076	1
aluminium silver	–	LFJT/A.1.63.1-83	2CKA006199A0145		0.0076	1
studio white	–	LFJT/A.1.63.1-84	2CKA006199A0146		0.0076	1
studio white matt	–	LFJT/A.1.63.1-884	2CKA006199A0147		0.0076	1
black matt	–	LFJT/A.1.63.1-885	2CKA006199A0148		0.0076	1
stainless steel	–	LFJT/A.1.63.1-866	2CKA006199A0150		0.0076	1

LFBT/A.1.63.1-81

Cover with Scene Icon, 1-fold Button

Labeling field with scene icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFST/A.1.63.1-81	2CKA006199A0152		0.0076	1
ivory white	–	LFST/A.1.63.1-82	2CKA006199A0153		0.0076	1
aluminium silver	–	LFST/A.1.63.1-83	2CKA006199A0154		0.0076	1
studio white	–	LFST/A.1.63.1-84	2CKA006199A0155		0.0076	1
studio white matt	–	LFST/A.1.63.1-884	2CKA006199A0156		0.0076	1
black matt	–	LFST/A.1.63.1-885	2CKA006199A0157		0.0076	1
stainless steel	–	LFST/A.1.63.1-866	2CKA006199A0159		0.0076	1

LFDW/A.1.63.1-81

Cover with Dim Icon, 1-fold Rocker

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFDW/A.1.63.1-81	2CKA006199A0263		0.0076	1
aluminium silver	–	LFDW/A.1.63.1-83	2CKA006199A0265		0.0076	1
studio white	–	LFDW/A.1.63.1-84	2CKA006199A0266		0.0076	1
studio white matt	–	LFDW/A.1.63.1-884	2CKA006199A0267		0.0076	1
black matt	–	LFDW/A.1.63.1-885	2CKA006199A0268		0.0076	1
stainless steel	–	LFDW/A.1.63.1-866	2CKA006199A0270		0.0076	1

LFJW/A.1.63.1-81

Cover with Blind Icon, 1-fold Rocker

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFJW/A.1.63.1-81	2CKA006199A0271		0.0076	1
ivory white	–	LFJW/A.1.63.1-82	2CKA006199A0272		0.0076	1
aluminium silver	–	LFJW/A.1.63.1-83	2CKA006199A0273		0.0076	1
studio white	–	LFJW/A.1.63.1-84	2CKA006199A0274		0.0076	1
studio white matt	–	LFJW/A.1.63.1-884	2CKA006199A0275		0.0076	1
black matt	–	LFJW/A.1.63.1-885	2CKA006199A0276		0.0076	1
stainless steel	–	LFJW/A.1.63.1-866	2CKA006199A0278		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

LFAW/A.1.63.1-81

Cover with Up/Down Icon, 1-fold Button

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFAW/A.1.63.1-81	2CKA006199A0279		0.0076	1
aluminium silver	–	LFAW/A.1.63.1-83	2CKA006199A0281		0.0076	1
studio white	–	LFAW/A.1.63.1-84	2CKA006199A0282		0.0076	1
studio white matt	–	LFAW/A.1.63.1-884	2CKA006199A0283		0.0076	1
black matt	–	LFAW/A.1.63.1-885	2CKA006199A0284		0.0076	1
stainless steel	–	LFAW/A.1.63.1-866	2CKA006199A0286		0.0076	1

LFBT/A.2.63.1-81

Cover with LIght Icon, 2-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFBT/A.2.63.1-81	2CKA006199A0287		0.0076	1
ivory white	–	LFBT/A.2.63.1-82	2CKA006199A0288		0.0076	1
aluminium silver	–	LFBT/A.2.63.1-83	2CKA006199A0289		0.0076	1
studio white	–	LFBT/A.2.63.1-84	2CKA006199A0290		0.0076	1
studio white matt	–	LFBT/A.2.63.1-884	2CKA006199A0291		0.0076	1
black matt	–	LFBT/A.2.63.1-885	2CKA006199A0292		0.0076	1
stainless steel	–	LFBT/A.2.63.1-866	2CKA006199A0294		0.0076	1

LFJT/A.2.63.1-81

Cover with Blind Icon, 2-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFJT/A.2.63.1-81	2CKA006199A0295		0.0076	1
aluminium silver	–	LFJT/A.2.63.1-83	2CKA006199A0297		0.0076	1
studio white	–	LFJT/A.2.63.1-84	2CKA006199A0298		0.0076	1
studio white matt	–	LFJT/A.2.63.1-884	2CKA006199A0299		0.0076	1
black matt	–	LFJT/A.2.63.1-885	2CKA006199A0300		0.0076	1
stainless steel	–	LFJT/A.2.63.1-866	2CKA006199A0302		0.0076	1

LFST/A.2.63.1-81

Cover with Scene Icon, 2-fold Button

Labeling field with scene icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFST/A.2.63.1-81	2CKA006199A0303		0.0076	1
ivory white	–	LFST/A.2.63.1-82	2CKA006199A0304		0.0076	1
aluminium silver	–	LFST/A.2.63.1-83	2CKA006199A0305		0.0076	1
studio white	–	LFST/A.2.63.1-84	2CKA006199A0306		0.0076	1
studio white matt	–	LFST/A.2.63.1-884	2CKA006199A0307		0.0076	1
black matt	–	LFST/A.2.63.1-885	2CKA006199A0308		0.0076	1
stainless steel	–	LFST/A.2.63.1-866	2CKA006199A0310		0.0076	1

LFDW/A.2.63.1-81

Cover with Dim/Blind Icon, 2-fold Rocker

Labeling field with one dimming- and one blind-icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFDW/A.2.63.1-81	2CKA006199A0311		0.0076	1
aluminium silver	–	LFDW/A.2.63.1-83	2CKA006199A0313		0.0076	1
studio white	–	LFDW/A.2.63.1-84	2CKA006199A0314		0.0076	1
studio white matt	–	LFDW/A.2.63.1-884	2CKA006199A0315		0.0076	1
black matt	–	LFDW/A.2.63.1-885	2CKA006199A0316		0.0076	1
stainless steel	–	LFDW/A.2.63.1-866	2CKA006199A0318		0.0076	1

LFAW/A.2.63.1-81

Cover with Up/Down Icon, 2-fold Rocker

Labeling field with two up/down icons for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFAW/A.2.63.1-81	2CKA006199A0319		0.0076	1
ivory white	–	LFAW/A.2.63.1-82	2CKA006199A0320		0.0076	1
aluminium silver	–	LFAW/A.2.63.1-83	2CKA006199A0321		0.0076	1
studio white	–	LFAW/A.2.63.1-84	2CKA006199A0322		0.0076	1
studio white matt	–	LFAW/A.2.63.1-884	2CKA006199A0323		0.0076	1
black matt	–	LFAW/A.2.63.1-885	2CKA006199A0324		0.0076	1
stainless steel	–	LFAW/A.2.63.1-866	2CKA006199A0326		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

LFMW/A.4.63.1-81

Cover with Music Icon, 4-fold Button

Labeling field with Stop/Play/Volume icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFMW/A.4.63.1-81	2CKA006199A0327		0.0076	1
ivory white	–	LFMW/A.4.63.1-82	2CKA006199A0328		0.0076	1
aluminium silver	–	LFMW/A.4.63.1-83	2CKA006199A0329		0.0076	1
studio white	–	LFMW/A.4.63.1-84	2CKA006199A0330		0.0076	1
studio white matt	–	LFMW/A.4.63.1-884	2CKA006199A0331		0.0076	1
black matt	–	LFMW/A.4.63.1-885	2CKA006199A0332		0.0076	1
stainless steel	–	LFMW/A.4.63.1-866	2CKA006199A0334		0.0076	1

CSE/U0.1.1.CK

Removal protection

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CSE/U0.1.1.CK	2CKA006199A0512			1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® Busch-art linear®/ALBA®Touch

SD/U12.70.1-4015

Touch Display 2.4", 70 x 70 mm, FM
Freely programmable touch panel 1 – up to 12-fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system. Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element. With scene function, logic functions, presence simulation and time programs. The device supports KNX Data Secure.

KNX functions:
- A total 12 control elements are displayed on a maximum of 12 pages.
- 18 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4touch surfaces on one page
- Primary function
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000/6226/T)

External power supply needed: 20-32 V DC (SELV)
Number of bus subscribers: 1
Optional Removal protection: TZE/U.0.xx.CK

Display size: 6.10 cm (2.4")
Display resolution: 240*240
Display screen: IPS display
Dimensions (L x W x D): 69.5 mm x 69.5 mm x 32 mm
Display surface: glass black (-825)

Class of temperature controller 1 Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	SD/U12.70.1-4015	2TMA310011B0004		0.078	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® Busch-art linear®/ALBA®Touch

KK/U4.70.1

Control Element, 70 x 70 mm
Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback. Communication over separat bus coupler unit (BA/U1.0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind/shutter control, scene.
The device supports KNX Data Secure.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK
Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.70.1	2CKA006115A0510		0.11586	1

BA/U1.0.1

Bus Coupling Unit KNX
KNX bus coupler unit for keypad 1- up to 4-fold devices: KK/U4.55.1, KK/U4.63.1 and KK/U4.70.1.
Bus connection via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	BA/U1.0.1	2CKA006120A0080		0.121	1

LFW/A.0.70.1-CK

Cover customized
Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.70.1.)

Ordering possible only with the unique design ID.
The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
pure plastics	–	LFW/A.0.70.1-CK	2CKA006199A0025		0.011586	1
painted plastics	–	LFW/A.0.70.1-CKL	2CKA006199A0519		0.011586	1

LFW/A.1.70.1-44G

Cover without Icon, 1-fold

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.1.70.1-44G	2CKA006199A0435		0.011586	1
white matt	–	LFW/A.1.70.1-44M	2CKA006199A0451		0.011586	1
black matt	–	LFW/A.1.70.1-45M	2CKA006199A0483		0.011586	1

LFW/A.2.70.1-44G

Cover with Design Line, 2-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.2.70.1-44G	2CKA006199A0436		0.011586	1
white matt	–	LFW/A.2.70.1-44M	2CKA006199A0452		0.011586	1
black matt	–	LFW/A.2.70.1-45M	2CKA006199A0484		0.011586	1

LFW/A.3.70.1-44G

Cover with Design Line, 3-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.3.70.1-44G	2CKA006199A0437		0.011586	1
white matt	–	LFW/A.3.70.1-44M	2CKA006199A0453		0.011586	1
black matt	–	LFW/A.3.70.1-45M	2CKA006199A0485		0.011586	1

LFW/A.4.70.1-44G

Cover with Design Line, 4-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.4.70.1-44G	2CKA006199A0438		0.011586	1
white matt	–	LFW/A.4.70.1-44M	2CKA006199A0454		0.011586	1
black matt	–	LFW/A.4.70.1-45M	2CKA006199A0486		0.011586	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® Busch-art linear®/ALBA®Touch

LFB/A.1.70.1-44G

Cover with Light Icon, 1-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFB/A.1.70.1-44G	2CKA006199A0439		0.011586	1
white matt	–	LFB/A.1.70.1-44M	2CKA006199A0455		0.011586	1
black matt	–	LFB/A.1.70.1-45M	2CKA006199A0487		0.011586	1

LFJ/A.1.70.1-44G

Cover with Blind Icon, 1-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFJ/A.1.70.1-44G	2CKA006199A0440		0.011586	1
white matt	–	LFJ/A.1.70.1-44M	2CKA006199A0456		0.011586	1
black matt	–	LFJ/A.1.70.1-45M	2CKA006199A0488		0.011586	1

LFS/A.1.70.1-44G

Cover with Scene Icon, 1-fold Button

Labeling field with one scene icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFS/A.1.70.1-44G	2CKA006199A0441		0.011586	1
white matt	–	LFS/A.1.70.1-44M	2CKA006199A0457		0.011586	1
black matt	–	LFS/A.1.70.1-45M	2CKA006199A0489		0.011586	1

LFDW/A.1.70.1-44G

Cover with Dim Icon, 1-fold Rocker

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFDW/A.1.70.1-44G	2CKA006199A0442		0.011586	1
white matt	–	LFDW/A.1.70.1-44M	2CKA006199A0458		0.011586	1
black matt	–	LFDW/A.1.70.1-45M	2CKA006199A0490		0.011586	1

LFJW/A.1.70.1-44G

Cover with Blind Icon, 1-fold Rocker

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFJW/A.1.70.1-44G	2CKA006199A0443		0.011586	1
white matt	–	LFJW/A.1.70.1-44M	2CKA006199A0459		0.011586	1
black matt	–	LFJW/A.1.70.1-45M	2CKA006199A0491		0.011586	1

LFAW/A.1.70.1-44G

Cover with Up/Down Icon, 1-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFAW/A.1.70.1-44G	2CKA006199A0444		0.011586	1
white matt	–	LFAW/A.1.70.1-44M	2CKA006199A0460		0.011586	1
black matt	–	LFAW/A.1.70.1-45M	2CKA006199A0492		0.011586	1

LFBT/A.2.70.1-44G

Cover with Light Icon, 2-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFBT/A.2.70.1-44G	2CKA006199A0445		0.011586	1
white matt	–	LFBT/A.2.70.1-44M	2CKA006199A0461		0.011586	1
black matt	–	LFBT/A.2.70.1-45M	2CKA006199A0493		0.011586	1

LFJT/A.2.70.1-44G

Cover with Blind Icon, 2-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFJT/A.2.70.1-44G	2CKA006199A0446		0.011586	1
white matt	–	LFJT/A.2.70.1-44M	2CKA006199A0462		0.011586	1
black matt	–	LFJT/A.2.70.1-45M	2CKA006199A0494		0.011586	1

ABB i-bus® KNX

User Operation – Design Ranges – ABB Trevion® Busch-art linear®/ALBA®Touch

LFST/A.2.70.1-44G

Cover with Scene Icon, 2-fold Button

Labeling field with scene icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFST/A.2.70.1-44G	2CKA006199A0447		0.011586	1
white matt	–	LFST/A.2.70.1-44M	2CKA006199A0463		0.011586	1
black matt	–	LFST/A.2.70.1-45M	2CKA006199A0495		0.011586	1

LFDW/A.2.70.1-44G

Cover with Dim/Blind Icon, 2-fold Rocker

Labeling field with one dimming- and one blind-icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFDW/A.2.70.1-44G	2CKA006199A0448		0.011586	1
white matt	–	LFDW/A.2.70.1-44M	2CKA006199A0464		0.011586	1
black matt	–	LFDW/A.2.70.1-45M	2CKA006199A0496		0.011586	1

LFAW/A.2.70.1-44G

Cover with Up/Down Icon, 2-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFAW/A.2.70.1-44G	2CKA006199A0449		0.011586	1
white matt	–	LFAW/A.2.70.1-44M	2CKA006199A0465		0.011586	1
black matt	–	LFAW/A.2.70.1-45M	2CKA006199A0497		0.011586	1

LFMW/A.4.70.1-44G

Cover with Music Icon, 4-fold Button

Labeling field with Stop/Play/Volume icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFMW/A.4.70.1-44G	2CKA006199A0450		0.011586	1
white matt	–	LFMW/A.4.70.1-44M	2CKA006199A0466		0.011586	1
black matt	–	LFMW/A.4.70.1-45M	2CKA006199A0498		0.011586	1

CSE/U0.1.1.CK

Removal protection

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CSE/U0.1.1.CK	2CKA006199A0512			1

ABB i-bus® KNX

User Operation – Design Ranges – saga touch™

SD/U12.55.1-825

Touch Display 2.4", 55 x 55 mm, FM
Freely programmable touch panel 1 – up to 12-fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system. Control, observe and manage your entire installation on one device: Switching Dimming Slider Blind RGBW control element Step switch Scene switch Display element Audio control element. With scene function, logic functions, presence simulation and time programs. The device supports KNX Data Secure.

KNX functions:
- A total 12 control elements are displayed on a maximum of 12 pages.
- 12 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4 touch surfaces on one page
- Primary function
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000/6226/T).

External power supply needed: 20-32 V DC (SELV)
Number of bus subscribers: 1
Optional Removal protection: TZE/U.0.xx.CK

Display size: 6.10 cm (2.4")
Display resolution: 240*240
Display screen: IPS display
Dimensions (L x W x D): 55 mm x 55 mm x 32 mm
Display surface: glass black (-825)

Class of temperature controller 1 Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	SD/U12.55.1-825	2TMA310011B0001		0.069	1

ABB i-bus® KNX

User Operation – Design Ranges – saga touch™

KK/U4.55.1

Control Element, 55 x 55 mm
Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback. Communication over separat bus coupler unit (BA/U1.0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind/shutter control, scene.
The device supports KNX Data Secure.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK
Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.55.1	2CKA006115A0506		0.0296	1

BA/U1.0.1

Bus Coupling Unit KNX
KNX bus coupler unit for keypad 1- up to 4-fold devices: KK/U4.55.1, KK/U4.63.1 and KK/U4.70.1.
Bus connection via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
black	–	BA/U1.0.1	2CKA006120A0080		0.121	1

LFW/A.0.55.91-CK

Cover customized
Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.55.1).

Ordering possible only with the unique design ID.
The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
pure plastics	–	LFW/A.0.55.91-CK	2CKA006199A0185		0.0076	1

LFW/A.1.55.91-916

Cover without Icon, 1-fold

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFW/A.1.55.91-916	2CKA006199A0186		0.0076	1

LFW/A.2.55.91-916

Cover with Design Line, 2-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFW/A.2.55.91-916	2CKA006199A0187		0.0076	1

LFW/A.3.55.91-916

Cover with Design Line, 3-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFW/A.3.55.91-916	2CKA006199A0188		0.0076	1

LFW/A.4.55.91-916

Cover with Design Line, 4-fold

Labeling field with design line for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFW/A.4.55.91-916	2CKA006199A0189		0.0076	1

LFB/A.1.55.91-916

Cover with Light Icon, 1-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFB/A.1.55.91-916	2CKA006199A0499		0.0076	1

LFJ/A.1.55.91-916

Cover with Blind Icon, 1-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJ/A.1.55.91-916	2CKA006199A0500		0.0076	1

ABB i-bus® KNX

User Operation – Design Ranges – saga touch™

LFS/A.1.55.91-916

Cover with Scene Icon, 1-fold Button

Labeling field with one scene icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFS/A.1.55.91-916	2CKA006199A0501		0.0076	1

LFDW/A.1.55.91-916

Cover with Dim Icon, 1-fold Rocker

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFDW/A.1.55.91-916	2CKA006199A0502		0.0076	1

LFJW/A.1.55.91-916

Cover with Blind Icon, 1-fold Rocker

Labeling field with one blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJW/A.1.55.91-916	2CKA006199A0503		0.0076	1

LFAW/A.1.55.91-916

Cover with Up/Down Icon, 1-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFAW/A.1.55.91-916	2CKA006199A0504		0.0076	1

LFBT/A.2.55.91-916

Cover with Light Icon, 2-fold Button

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFBT/A.2.55.91-916	2CKA006199A0505		0.0076	1

LFJT/A.2.55.91-916

Cover with Blind Icon, 2-fold Button

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJT/A.2.55.91-916	2CKA006199A0506		0.0076	1

LFST/A.2.55.91-916

Cover with Scene Icon, 2-fold Button

Labeling field with scene icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFST/A.2.55.91-916	2CKA006199A0507		0.0076	1

LFDW/A.2.55.91-916

Cover with Dim/Blind Icon, 2-fold Rocker

Labeling field with one dimming- and one blind-icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFDW/A.2.55.91-916	2CKA006199A0508		0.0076	1

LFAW/A.2.55.91-916

Cover with Up/Down Icon, 2-fold Rocker

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFAW/A.2.55.91-916	2CKA006199A0509		0.0076	1

LFMW/A.4.55.91-916

Cover with Music Icon, 4-fold Button

Labeling field with Stop/Play/Volume icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFMW/A.4.55.91-916	2CKA006199A0510		0.0076	1

CSE/U0.1.1.CK

Removal protection

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CSE/U0.1.1.CK	2CKA006199A0512			1

ABB i-bus® KNX

User Operation – Design Ranges – Standard Control Elements

The standard control elements are available as 1/2 gang, 2/4 gang or 4/8 gang models. Every switch rocker has two LEDs, which display the status of the connected loads. The separate switch rockers are freely programmable and are suitable for switching and dimming, and also for operating blinds and as a light scene extension unit.

They can also be used in commercial applications. Anti-theft protection has also been integrated – an important factor for installations in public areas.

Customised text. Pictograms can be applied to push buttons for easier orientation. A clear text template with standard symbols is included for every sensor. The self-explanatory pictograms are available for the complete range of building control technology and if necessary can be easily replaced. If the appropriate symbol is not included, the push buttons can be labelled as desired. The related bus-coupler unit is included in delivery.

01

Function
Switching | Dimming | Blinds | Push-button | Value transmitter | Light scene extension unit

Features
Labellable switch rockers | Anti-theft protection | Freely programmable switches | Status/orientation light (red/green/OFF)

02

Function
Switching | Dimming | Blinds | Push-button | Value transmitter | Light scene extension unit

Features
Labellable switch rockers | Anti-theft protection | Freely programmable switches | Status/orientation light (red/green/OFF)

03

Function
Switching | Dimming | Blinds | Push-button | Value transmitter | Light scene extension unit

Features
Labellable switch rockers | Anti-theft protection | Freely programmable switches | Status/orientation light (red/green/OFF)

01 Standard control element 1/2 gang
02 Standard control element 2/4 gang
03 Standard control element 4/8 gang

Standard Control Element with bus coupler enclosed
With labelling field. Transparent labelling sheet with standard symbols included in delivery. Display elements: Two LED per rocker via separate communication object for status (Red/Green/OFF) or orientation light. Protection class (Device): IP 20.
Temperature range (Device): –5 °C to +45 °C. Dimensions (L x W x D): 63 mm x 63 mm.

6125/01

6126/01

6127/01

			Control Element with Bus Coupler, standard, FM, 1-fold with bus coupler enclosed			**Control Element with Bus Coupler, standard, FM, 2-fold with bus coupler enclosed**			**Control Element with Bus Coupler, standard, FM, 4-fold with bus coupler enclosed**		
			With 1 Control element: rocker switch left/right			With 2 Control elements: rocker switch left/right			With 4 Control elements: rocker switch left/right		
Pack unit pc.	**Weight 1 pc. kg**	**Description**	**Order details**		**Price 1 pc.**	**Order details**		**Price 1 pc.**	**Order details**		**Price 1 pc.**
			Type	**Order code**	**€**	**Type**	**Order code**	**€**	**Type**	**Order code**	**€**
		future® linear									
1		anthracite	6125/01-81-500	2CKA006115A0205		6126/01-81-500	2CKA006116A0195		6127/01-81-500	2CKA006117A0221	
1		savanne/ivory	6125/01-82-500	2CKA006115A0206		6126/01-82-500	2CKA006116A0196		6127/01-82-500	2CKA006117A0222	
1		aluminium silver [1]	6125/01-83-500	2CKA006115A0207		6126/01-83-500	2CKA006116A0197		6127/01-83-500	2CKA006117A0223	
1		davos/studio white	6125/01-84-500	2CKA006115A0183		6126/01-84-500	2CKA006116A0174		6127/01-84-500	2CKA006117A0200	
1		studio white, matt [1]	6125/01-884-500	2CKA006115A0214		6126/01-884-500	2CKA006116A0204		6127/01-884-500	2CKA006117A0230	
1		black, matt [1]	6125/01-885-500	2CKA006115A0215		6126/01-885-500	2CKA006116A0205		6127/01-885-500	2CKA006117A0231	
		solo®									
1		savanne/ivory	6125/01-82-500	2CKA006115A0206		6126/01-82-500	2CKA006116A0196		6127/01-82-500	2CKA006117A0222	
1		davos/studio white	6125/01-84-500	2CKA006115A0183		6126/01-84-500	2CKA006116A0174		6127/01-84-500	2CKA006117A0200	
		carat®									
1		anthracite	6125/01-81-500	2CKA006115A0205		6126/01-81-500	2CKA006116A0195		6127/01-81-500	2CKA006117A0221	
1		savanne/ivory	6125/01-82-500	2CKA006115A0206		6126/01-82-500	2CKA006116A0196		6127/01-82-500	2CKA006117A0222	
1		davos/studio white	6125/01-84-500	2CKA006115A0183		6126/01-84-500	2CKA006116A0174		6127/01-84-500	2CKA006117A0200	
		pure stainless steel [1]									
1		stainless steel	6125/01-866-500	2CKA006115A0211		6126/01-866-500	2CKA006116A0201		6127/01-866-500	2CKA006117A0227	
		Busch-axcent®									
1		davos/studio white	6125/01-84-500	2CKA006115A0183		6126/01-84-500	2CKA006116A0174		6127/01-84-500	2CKA006117A0200	

[1] Surface painted

ABB i-bus® KNX

User Operation – Design Ranges – Multifunction Control Elements

The multifunction control elements with LED colour code concept meet the highest demands for comfort and technology. They each come with two RGB LEDs per rocker switch, which conform to a consistent colour concept. This makes the function obvious at a glance, and the surfaces can be additionally fitted with pictograms. Each side of a rocker switch can be occupied with its own function – each for calling up one light scene, for instance. This turns a 4 gang control element into an 8 gang control element.



01	Multifunction control element 1/2 gang
02	Multifunction control element 2/4 gang
03	Multifunction control element 4/8 gang
04	Multifunction control element 2/4 gang, integrated room thermostat
05	Multifunction control element 3/6 gang with IR reception
06	FM movement detector standard
07	FM movement detector comfort

01

Function
Switching | Dimming | Blinds | Push-button | Value transmitter | Light scene extension unit | Step-type | Multiple operation | Logic function (including light scenes)

Features
Labellable switch rockers | Anti-theft protection | Freely programmable switches | LED colour code concept

02

Function
Switching | Dimming | Blinds | Push-button | Value transmitter | Light scene extension unit | Step-type | Multiple operation | Logic function (including light scenes)

Features
Labellable switch rockers | Anti-theft protection | Freely programmable switches | LED colour code concept

03

Function
Switching | Dimming | Blinds | Push-button | Value transmitter | Light scene extension unit | Step-type | Multiple operation | Logic function (including light scenes)

Features
Labellable switch rockers | Anti-theft protection | Freely programmable switches | LED colour code concept

Wide range. Different shapes, colours and materials fulfil every requirement. KNX control elements are available in the carat®, pure stainless steel, solo®, Busch-axcent® and future® linear programmes. The complete range of conventional switches from these series is available, so there are no limits to the options for combining KNX components.

04

Function
Comfort | Stand-by | Night mode | Frost protection | Specified temperature | Time | Date | Heating | Cooling | Fan Coil operation for heating and cooling | Light scenes | Light scene extension unit | Value | Logic function (including light scenes)

Features
Labellable switch rockers | Anti-theft protection | Display illumination | Colour concept

05

Function
10 freely programmable IR channels | Switching | Dimming | Blinds | Button | Light scenes | Light scene extension unit | Value | Logic function (including light scenes)

Features
Labellable switch rockers | Anti-theft protection | Display illumination | Colour concept

06

Function
4 channels | Logic function (including light scenes)

07

Function
4 channels | Logic function (including light scenes)

ABB i-bus® KNX

User Operation – Design Ranges – Multifunction Control Elements

Control Element, Multi-function/colour concept
For BCU 6120/12-101-500 or 6120/13-500. With labelling field. Support of KNX functions through innovative colour concept or standard illumination red/green. Push switch function: switching/dimming/blind/sending values/scenes etc. Transparent labelling sheet with standard symbols included in delivery. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Display elements: Two LED per rocker via separate communication object for status (Red/Green/OFF) or orientation light.

6125/02

6126/02

6127/02

			Control element, 1/2-fold Multi-function/colour concept With 1 Control element: rocker switch left/right			**Control element, 2/4-fold Multi-function/colour concept** With 2 Control elements: rocker switch left/right			**Control element, 4/8-fold Multi-function/colour concept** With 4 Control elements: rocker switch left/right		
Pack unit pc.	**Weight 1 pc. kg**	**Description**	**Order details**		**Price 1 pc.**	**Order details**		**Price 1 pc.**	**Order details**		**Price 1 pc.**
			Type	**Order code**	**€**	**Type**	**Order code**	**€**	**Type**	**Order code**	**€**
		future® linear									
1		anthracite	6125/02-81-500	2CKA006115A0216		6126/02-81-500	2CKA006116A0206		6127/02-81-500	2CKA006117A0232	
1		savanne/ivory	6125/02-82-500	2CKA006115A0217		6126/02-82-500	2CKA006116A0207		6127/02-82-500	2CKA006117A0233	
1		aluminium silver [1]	6125/02-83-500	2CKA006115A0218		6126/02-83-500	2CKA006116A0208		6127/02-83-500	2CKA006117A0234	
1		davos/studio white	6125/02-84-500	2CKA006115A0219		6126/02-84-500	2CKA006116A0209		6127/02-84-500	2CKA006117A0235	
1		studio white, matt [1]	6125/02-884-500	2CKA006115A0226		6126/02-884-500	2CKA006116A0216		6127/02-884-500	2CKA006117A0242	
1		black, matt [1]	6125/02-885-500	2CKA006115A0227		6126/02-885-500	2CKA006116A0217		6127/02-885-500	2CKA006117A0243	
		solo®									
1		savanne/ivory	6125/02-82-500	2CKA006115A0217		6126/02-82-500	2CKA006116A0207		6127/02-82-500	2CKA006117A0233	
1		davos/studio white	6125/02-84-500	2CKA006115A0219		6126/02-84-500	2CKA006116A0209		6127/02-84-500	2CKA006117A0235	
		carat®									
1		anthracite	6125/02-81-500	2CKA006115A0216		6126/02-81-500	2CKA006116A0206		6127/02-81-500	2CKA006117A0232	
1		savanne/ivory	6125/02-82-500	2CKA006115A0217		6126/02-82-500	2CKA006116A0207		6127/02-82-500	2CKA006117A0233	
1		davos/studio white	6125/02-84-500	2CKA006115A0219		6126/02-84-500	2CKA006116A0209		6127/02-84-500	2CKA006117A0235	
		pure stainless steel [1]									
1		stainless steel	6125/02-866-500	2CKA006115A0223		6126/02-866-500	2CKA006116A0213		6127/02-866-500	2CKA006117A0239	
		Busch-axcent®									
1		davos/studio white	6125/02-84-500	2CKA006115A0219		6126/02-84-500	2CKA006116A0209		6127/02-84-500	2CKA006117A0235	
		Dynasty®									
1		anthracite	6125/02-81-500	2CKA006115A0216		6126/02-81-500	2CKA006116A0206		6127/02-81-500	2CKA006117A0232	
1		savanne/ivory	6125/02-82-500	2CKA006115A0217		6126/02-82-500	2CKA006116A0207		6127/02-82-500	2CKA006117A0233	
1		antique brass	6125/02-840-500	2CKA006115A0452		6126/02-840-500	2CKA006116A0227		6127/02-840-500	2CKA006117A0252	

[1] Surface painted

6129/01

Control Element, 3/6-fold, multifunction, with IR-Interface, FM
suitable for KNX bus coupler 6120/12-101-500 and 6120/13-500. With IR interface for Busch-remote controllers 6010-25 or 6020-.../6021-... . Push button function: switching/dimming/blind/value sending/light scenes/step-type switch functions. Switch contacts left/right. Two freely programmable RGB LEDs per rocker. With RGB colour code concept or red/green/OFF-operation. With labeling field. Transparent labeling sheet with standard symbols included in delivery.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
future® linear						
anthracite	–	6129/01-81-500	2CKA006135A0156		0.08	1
savanne/ivory	–	6129/01-82-500	2CKA006135A0157		0.08	1
aluminium silver [1]	–	6129/01-83-500	2CKA006135A0158		0.08	1
davos/studio white	–	6129/01-84-500	2CKA006135A0146		0.08	1
studio white, matt [1]	–	6129/01-884-500	2CKA006135A0165		0.08	1
black, matt [1]	–	6129/01-885-500	2CKA006135A0166		0.08	1
solo®						
savanne/ivory	–	6129/01-82-500	2CKA006135A0157		0.08	1
davos/studio white	–	6129/01-84-500	2CKA006135A0146		0.08	1
carat®						
anthracite	–	6129/01-81-500	2CKA006135A0156		0.08	1
savanne/ivory	–	6129/01-82-500	2CKA006135A0157		0.08	1
davos/studio white	–	6129/01-84-500	2CKA006135A0146		0.08	1
pure stainless steel [1]						
stainless steel	–	6129/01-866-500	2CKA006135A0162		0.08	1
Busch-axcent®						
davos/studio white	–	6129/01-84-500	2CKA006135A0146		0.08	1

[1] Surface painted

ABB i-bus® KNX

User Operation – Design Ranges – Movement Detectors

64765-81-500

Busch-Comfortswitch® flex Control Element Movement sensor with LED Orientation light **NEW**

Control element with movement detector. For switching lighting systems that depend on brightness and movement. With select lens, prevents detection of smaller animal. Push switch function possible at all times. With notice LED when manual operation is necessary. Extension of the detection range by main unit/extension unit combination. Control element: 2 controllers for setting the brightness switching threshold and switch-off delay. Additional activation/deactivation option via push-button input on the flush-mounted insert. Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off. Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off. Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off. With continuous light/continuous Off function. Adjusting elements on rear side. Surveillance density: 9 sectors with 28 switching segments. Switch off delay: 1 to 10 min., adjustable.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
future® linear						
anthracite	–	64765-81-500	2CKA006800A2883			1
ivory	–	64765-82-500	2CKA006800A2885			1
aluminium silver	–	64765-83-500	2CKA006800A2887			1
studio white	–	64765-84-500	2CKA006800A2889			1
studio white matt	–	64765-884-500	2CKA006800A2893			1
black, matt	–	64765-885-500	2CKA006800A2895			1
solo®						
ivory	–	64765-82-500	2CKA006800A2885			1
studio white	–	64765-84-500	2CKA006800A2889			1
Busch-axcent						
studio white	–	64765-84-500	2CKA006800A2889			1
pure stainless steel						
stainless steel	–	64765-866-500	2CKA006800A2898			1
carat®						
anthracite	–	64765-81-500	2CKA006800A2883			1
ivory	–	64765-82-500	2CKA006800A2885			1
studio white	–	64765-84-500	2CKA006800A2889			1
Dynasty®						
anthracite	–	64765-81-500	2CKA006800A2883			1
ivory	–	64765-82-500	2CKA006800A2885			1
antique brass	–	64765-840-500	2CKA006800A2896			1

64764-81-500

Busch-Watchdog 180 flex Multi sensor with select lens Movement sensor white **NEW**
Movement detector with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times.
For detection down to the floor. For detection in stairwells. With 4 detection levels.
Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. With continuous light/continuous Off function.
With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
future® linear						
anthracite	–	64764-81-500	2CKA006800A2995			1
ivory	–	64764-82-500	2CKA006800A2997			1
aluminium silver	–	64764-83-500	2CKA006800A2999			1
studio white	–	64764-84-500	2CKA006800A3001			1
studio white matt	–	64764-884-500	2CKA006800A3005			1
black, matt	–	64764-885-500	2CKA006800A3007			1
solo®						
ivory	–	64764-82-500	2CKA006800A2997			1
studio white	–	64764-84-500	2CKA006800A3001			1
Busch-axcent						
studio white	–	64764-84-500	2CKA006800A3001			1
pure stainless steel						
stainless steel	–	64764-866-500	2CKA006800A3010			1
carat®						
anthracite	–	64764-81-500	2CKA006800A2995			1
ivory	–	64764-82-500	2CKA006800A2997			1
studio white	–	64764-84-500	2CKA006800A3001			1
Dynasty®						
anthracite	–	64764-81-500	2CKA006800A2995			1
ivory	–	64764-82-500	2CKA006800A2997			1
antique brass	–	64764-840-500	2CKA006800A3008			1
ABB SAGA						
studio white	–	64764-916-510	2CKA006800A3059			1

ABB i-bus® KNX

User Operation – Design Ranges – Movement Detectors

64762-81-500

Busch-Watchdog 180 flex Comfort sensor with select lens Movement sensor white **NEW**
Movement detector with measurement of ambient light. For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. Extension of the detection range by means of master/slave combination. With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments. Switch-off delay: approx. 10 sec – 30 min or short-time pulse 1 sec adjustable.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
future® linear						
anthracite	–	64762-81-500	2CKA006800A2958			1
ivory	–	64762-82-500	2CKA006800A2960			1
aluminium silver	–	64762-83-500	2CKA006800A2962			1
studio white	–	64762-84-500	2CKA006800A2964			1
studio white matt	–	64762-884-500	2CKA006800A2968			1
black, matt	–	64762-885-500	2CKA006800A2970			1
solo®						
ivory	–	64762-82-500	2CKA006800A2960			1
studio white	–	64762-84-500	2CKA006800A2964			1
Busch-axcent						
studio white	–	64762-84-500	2CKA006800A2964			1
pure stainless steel						
stainless steel	–	64762-866-500	2CKA006800A2973			1
carat®						
anthracite	–	64762-81-500	2CKA006800A2958			1
ivory	–	64762-82-500	2CKA006800A2960			1
studio white	–	64762-84-500	2CKA006800A2964			1
Dynasty®						
anthracite	–	64762-81-500	2CKA006800A2958			1
ivory	–	64762-82-500	2CKA006800A2960			1
antique brass	–	64762-840-500	2CKA006800A2971			1

BA/U1.0.1

Bus Coupling Unit KNX
KNX bus coupling unit for Busch-Comfortswitch, Busch-Watchdog 180 flex with multilense and Busch-Watchdog 180 flex Comfort sensor with select lens.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	BA/U1.0.1	2CKA006120A0080		0.121	1

6122/10-84-500

Busch-Watchdog® 180 Sensor Standard, Select with integrated bus coupler, FM
Movement detector with up to 4 channels. The bus can be connected via enclosed terminal block. With integrated KNX bus coupler.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	6122/10-212-500	2CKA006132A0373		0.08	1
alpine white	–	6122/10-214-500	2CKA006132A0374		0.08	1
future® linear						
anthracite	–	6122/10-81-500	2CKA006132A0376		0.08	1
ivory	–	6122/10-82-500	2CKA006132A0377		0.08	1
aluminium silver	–	6122/10-83-500	2CKA006132A0378		0.08	1
studio white	–	6122/10-84-500	2CKA006132A0379		0.08	1
studio white matt	–	6122/10-884-500	2CKA006132A0380		0.08	1
black, matt	–	6122/10-885-500	2CKA006132A0381		0.08	1
solo®						
ivory	–	6122/10-82-500	2CKA006132A0377		0.08	1
studio white	–	6122/10-84-500	2CKA006132A0379		0.08	1
Busch-axcent®						
studio white	–	6122/10-84-500	2CKA006132A0379		0.08	1
pure stainless steel						
stainless steel	–	6122/10-866-500	2CKA006132A0385		0.08	1
carat®						
anthracite	–	6122/10-81-500	2CKA006132A0376		0.08	1
ivory	–	6122/10-82-500	2CKA006132A0377		0.08	1
studio white	–	6122/10-84-500	2CKA006132A0379		0.08	1
Dynasty®						
anthracite	–	6122/10-81-500	2CKA006132A0376		0.08	1
ivory	–	6122/10-82-500	2CKA006132A0377		0.08	1
antique brass	–	6122/10-840-500	2CKA006132A0407		0.08	1

ABB i-bus® KNX

User Operation – Design Ranges – Room Thermostats

6128/28-884-500

Room Thermostat with Display and 2/4-fold Switch Sensor, FM
For ABB i-bus® KNX bus coupler 6120/12-101-500, 6120/13-500. Support of KNX functions through innovative colour concept (yellow = lighting, blue = blind, orange = RTC, magenta = scene and white = neutral/no function assigned) or standard illumination red/green. Rocker switch left/right (switching/dimming/blind/value sender/light scenes/fan function). Master/slave configuration. With base-load operation. The controller is a constant room temperature controller for ventilator convectors (fan coils) in 2-pipe and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Transparent labelling sheet with standard symbols included in delivery. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Control element: Switch contacts left/right, also for selecting setpoint and mode of operation Display elements: LCD showing operation mode and temperature. Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C. Dimensions (L x W x D): 63 mm x 63 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
future® linear						
anthracite	–	6128/28-81-500	2CKA006134A0331		0.076	1
savanne/ivory	–	6128/28-82-500	2CKA006134A0332		0.076	1
aluminium silver	–	6128/28-83-500	2CKA006134A0333		0.076	1
davos/studio white	–	6128/28-84-500	2CKA006134A0334		0.076	1
studio white, matt	–	6128/28-884-500	2CKA006134A0338		0.076	1
black, matt	–	6128/28-885-500	2CKA006134A0339		0.076	1
solo®						
savanne/ivory	–	6128/28-82-500	2CKA006134A0332		0.076	1
davos/studio white	–	6128/28-84-500	2CKA006134A0334		0.076	1
carat®						
anthracite	–	6128/28-81-500	2CKA006134A0331		0.076	1
savanne/ivory	–	6128/28-82-500	2CKA006134A0332		0.076	1
davos/studio white	–	6128/28-84-500	2CKA006134A0334		0.076	1
pure stainless steel						
stainless steel	–	6128/28-866-500	2CKA006134A0335		0.076	1
Busch-axcent®						
davos/studio white	–	6128/28-84-500	2CKA006134A0334		0.076	1
Dynasty®						
anthracite	–	6128/28-81-500	2CKA006134A0331		0.076	1
savanne/ivory	–	6128/28-82-500	2CKA006134A0332		0.076	1
antique brass	–	6128/28-840-500	2CKA006134A0342		0.076	1

ABB i-bus® KNX

User Operation – Design Ranges – Frames

1721-184K

future® linear

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, anthracite	–	1721-181K	2CKA001754A4240		0.024	10
1-fold, savanna/ivory	–	1721-182K-500	2CKA001754A4506		0.024	10
1-fold, aluminium silver [1]	–	1721-183K-500	2CKA001754A4529		0.024	10
1-fold, davos/studio white	–	1721-184K-500	2CKA001754A4498		0.024	10
1-fold, studio white, matt [1]	–	1721-884K-500	2CKA001754A4531		0.024	10
1-fold, black matt [1]	–	1721-885K-500	2CKA001754A4532		0.024	10
2-fold, anthracite	–	1722-181K	2CKA001754A4241		0.041	10
2-fold, savanna/ivory	–	1722-182K	2CKA001754A4231		0.041	10
2-fold, aluminium silver [1]	–	1722-183K-500	2CKA001754A4530		0.04	10
2-fold, davos/studio white	–	1722-184K-500	2CKA001754A4499		0.041	10
2-fold, studio white, matt [1]	–	1722-884K	2CKA001754A4415		0.037	10
2-fold, black matt [1]	–	1722-885K-500	2CKA001754A4534		0.037	10
3-fold, anthracite	–	1723-181K	2CKA001754A4242		0.05	10
3-fold, savanna/ivory	–	1723-182K	2CKA001754A4232		0.05	10
3-fold, aluminium silver [1]	–	1723-183K-500	2CKA001754A4533		0.052	10
3-fold, davos/studio white	–	1723-184K-500	2CKA001754A4502		0.053	10
3-fold, studio white, matt [1]	–	1723-884K	2CKA001754A4416		0.052	10
3-fold, black matt [1]	–	1723-885K	2CKA001754A4421		0.052	10
4-fold, anthracite	–	1724-181K	2CKA001754A4243		0.064	10
4-fold, savanna/ivory	–	1724-182K	2CKA001754A4233		0.064	10
4-fold, aluminium silver [1]	–	1724-183K	2CKA001754A4309		0.064	10
4-fold, davos/studio white	–	1724-184K	2CKA001754A4238		0.064	10
4-fold, studio white, matt [1]	–	1724-884K	2CKA001754A4417		0.064	10
4-fold, black matt [1]	–	1724-885K	2CKA001754A4422		0.064	10
5-fold, anthracite	–	1725-181K	2CKA001754A4244		0.096	1
5-fold, savanna/ivory	–	1725-182K	2CKA001754A4234		0.114	1
5-fold, aluminium silver [1]	–	1725-183K	2CKA001754A4310		0.114	1
5-fold, davos/studio white	–	1725-184K-500	2CKA001754A4517		0.112	1
5-fold, studio white, matt [1]	–	1725-884K	2CKA001754A4418		0.114	1
5-fold, black matt [1]	–	1725-885K	2CKA001754A4423		0.114	1

[1] Surface painted

ABB i-bus® KNX

User Operation – Design Ranges – Frames

1721-80

solo®

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, chrome, matt	–	1721-80-500	2CKA001754A4535		0.032	10
1-fold, chrome, glossy	–	1721-80G-500	2CKA001754A4538		0.032	10
1-fold, davos/studio white	–	1721-84-500	2CKA001754A4536		0.032	10
2-fold, chrome, matt	–	1722-80-500	2CKA001754A4537		0.055	10
2-fold, chrome, glossy	–	1722-80G	2CKA001754A4327		0.045	10
2-fold, davos/studio white	–	1722-84-500	2CKA001754A4539		0.055	10
3-fold, chrome, matt	–	1723-80-500	2CKA001754A4540		0.066	10
3-fold, chrome, glossy	–	1723-80G	2CKA001754A4328		0.073	10
3-fold, davos/studio white	–	1723-84-500	2CKA001754A4541		0.073	10
4-fold, chrome, matt	–	1724-80	2CKA001754A4107		0.12	1
4-fold, chrome, glossy	–	1724-80G	2CKA001754A4329		0.12	1
4-fold, davos/studio white	–	1724-84	2CKA001754A4112		0.12	1
5-fold, chrome, matt	–	1725-80	2CKA001754A4108		0.14	1
5-fold, chrome, glossy	–	1725-80G	2CKA001754A4330		0.14	1
5-fold, davos/studio white	–	1725-84	2CKA001754A4113		0.14	1

1721-860

carat®

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, white glass	–	1721-811	2CKA001754A4442		0.161	1
1-fold, bronze	–	1721-821	2CKA001754A4258		0.38	1
1-fold, gold [1]	–	1721-823-101	2CKA001754A4356		0.34	1
1-fold, glass black	–	1721-825	2CKA001754A4322		0.16	1
1-fold, chrome	–	1721-826-101	2CKA001754A4360		0.335	1
1-fold, stainless steel	–	1721-860	2CKA001754A4254		0.34	1
2-fold, white glass	–	1722-811	2CKA001754A4443		0.234	1
2-fold, bronze	–	1722-821	2CKA001754A4259		0.559	1
2-fold, gold [1]	–	1722-823-101	2CKA001754A4357		0.5	1
2-fold, glass black	–	1722-825	2CKA001754A4323		0.24	1
2-fold, chrome	–	1722-826-101	2CKA001754A4361		0.5	1
2-fold, stainless steel	–	1722-860	2CKA001754A4255		0.48	1
3-fold, white glass	–	1723-811	2CKA001754A4444		0.312	1
3-fold, bronze	–	1723-821	2CKA001754A4260		0.678	1
3-fold, gold [1]	–	1723-823-101	2CKA001754A4358		0.66	1
3-fold, glass black	–	1722-825	2CKA001754A4323		0.24	1
3-fold, chrome	–	1723-826-101	2CKA001754A4362		0.66	1
3-fold, stainless steel	–	1723-860	2CKA001754A4256		0.6	1
4-fold, white glass	–	1724-811	2CKA001754A4445		0.388	1
4-fold, bronze	–	1724-821	2CKA001754A4261		0.816	1
4-fold, gold [1]	–	1724-823-101	2CKA001754A4359		0.8	1
4-fold, glass black	–	1724-825	2CKA001754A4325		0.4	1
4-fold, chrome	–	1724-826-101	2CKA001754A4363		0.82	1
4-fold, stainless steel	–	1724-860	2CKA001754A4257		0.758	1

[1] Gold plated 24 carat

1721-866K

pure stainless steel

For vertical and horizontal installation. Stainless steel material.
Anti-fingerprint (does not leave any visible fingerprints on the material).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, stainless steel	–	1721-866K-500	2CKA001754A4500		0.038	10
2-fold, stainless steel	–	1722-866K-500	2CKA001754A4501		0.064	10
3-fold, stainless steel	–	1723-866K	2CKA001754A4319		0.083	10
4-fold, stainless steel	–	1724-866K	2CKA001754A4320		0.14	1
5-fold, stainless steel	–	1725-866K	2CKA001754A4321		0.175	1

ABB i-bus® KNX

User Operation – Design Ranges – Frames

1722-283

axcent®

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, platinum	–	1721-270	2CKA001754A4683		0.049	1
1-fold, black mat	–	1721-275	2CKA001754A4703		0.049	1
1-fold, titanium	–	1721-276	2CKA001754A4693		0.049	1
1-fold, black	–	1721-281	2CKA001754A4409		0.041	10
1-fold, davos/studio white	–	1721-284	2CKA001754A4331		0.038	10
1-fold, yellow	–	1721-285	2CKA001754A4334		0.041	10
1-fold, green	–	1721-286	2CKA001754A4337		0.041	10
1-fold, red	–	1721-287	2CKA001754A4340		0.041	10
1-fold, blue	–	1721-288	2CKA001754A4343		0.041	10
1-fold, white glass	–	1721-280	2CKA001754A4437		0.095	1
1-fold, entrée-grey	–	1721-291-500	2CKA001754A4471		0.041	10
2-fold, platinum	–	1722-270	2CKA001754A4684		0.073	1
2-fold, black mat	–	1722-275	2CKA001754A4704		0.073	1
2-fold, titanium	–	1722-276	2CKA001754A4694		0.073	1
2-fold, black	–	1722-281	2CKA001754A4410		0.054	10
2-fold, davos/studio white	–	1722-284	2CKA001754A4332		0.055	10
2-fold, yellow	–	1722-285	2CKA001754A4335		0.055	10
2-fold, green	–	1722-286	2CKA001754A4338		0.055	10
2-fold, red	–	1722-287	2CKA001754A4341		0.055	10
2-fold, blue	–	1722-288	2CKA001754A4344		0.055	10
2-fold, white glass	–	1722-280	2CKA001754A4438		0.115	1
2-fold, entrée-grey	–	1722-291-500	2CKA001754A4472		0.055	10
2-fold, maison-beige	–	1722-299-500	2CKA001754A4482		0.055	10
3-fold, platinum	–	1723-270	2CKA001754A4685		0.100	1
3-fold, black mat	–	1723-275	2CKA001754A4705		0.100	1
3-fold, titanium	–	1723-276	2CKA001754A4695		0.100	1
3-fold, black	–	1723-281	2CKA001754A4411		0.073	10
3-fold, davos/studio white	–	1723-284	2CKA001754A4333		0.073	10
3-fold, yellow	–	1723-285	2CKA001754A4336		0.073	10
3-fold, green	–	1723-286	2CKA001754A4339		0.073	10
3-fold, red	–	1723-287	2CKA001754A4342		0.073	10
3-fold, blue	–	1723-288	2CKA001754A4345		0.073	10
3-fold, white glass	–	1723-280	2CKA001754A4439		0.261	1
3-fold, entrée-grey	–	1723-291-500	2CKA001754A4473		0.073	10
3-fold, maison-beige	–	1723-299-500	2CKA001754A4483		0.073	10

Continuation of table “axcent” on next page

Continuation of table “axcent”

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold, platinum	–	1724-270	2CKA001754A4686		0.126	1
4-fold, black mat	–	1724-275	2CKA001754A4706		0.126	1
4-fold, titanium	–	1724-276	2CKA001754A4696		0.126	1
4-fold, black	–	1724-281	2CKA001754A4412		0.117	1
4-fold, davos/studio white	–	1724-284	2CKA001754A4346		0.117	1
4-fold, yellow	–	1724-285	2CKA001754A4348		0.117	1
4-fold, green	–	1724-286	2CKA001754A4350		0.117	1
4-fold, red	–	1724-287	2CKA001754A4352		0.117	1
4-fold, blue	–	1724-288	2CKA001754A4354		0.117	1
4-fold, white glass	–	1724-280	2CKA001754A4440		0.328	1
4-fold, entrée-grey	–	1724-291-500	2CKA001754A4474		0.117	1
4-fold, maison-beige		1724-299-500	2CKA001754A4484		0.117	1
5-fold, platinum	–	1725-270	2CKA001754A4687		0.150	1
5-fold, black mat	–	1725-275	2CKA001754A4707		0.150	1
5-fold, titanium	–	1725-276	2CKA001754A4697		0.150	1
5-fold, black	–	1725-281	2CKA001754A4413		0.145	1
5-fold, davos/studio white	–	1725-284	2CKA001754A4347		0.145	1
5-fold, yellow	–	1725-285	2CKA001754A4349		0.145	1
5-fold, green	–	1725-286	2CKA001754A4351		0.145	1
5-fold, red	–	1725-287	2CKA001754A4353		0.145	1
5-fold, blue	–	1725-288	2CKA001754A4355		0.145	1
5-fold, white glass	–	1725-280	2CKA001754A4441		0.38	1
5-fold, entrée-grey	–	1725-291-500	2CKA001754A4475		0.145	1
5-fold, maison-beige	–	1725-299-500	2CKA001754A4485		0.145	1

ABB i-bus® KNX

User Operation – Design Ranges – Frames

1721-838-500

Dynasty®

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, polished brass ivory	–	1721-838-500	2CKA001754A4560		0.28	1
1-fold, polished brass anthracite	–	1721-835-500	2CKA001754A4565		0.28	1
1-fold, polished brass decor ivory	–	1721-836-500	2CKA001754A4570		0.28	1
1-fold, polished brass decor anthracite	–	1721-833-500	2CKA001754A4575		0.286	1
1-fold, antique brass ivory	–	1721-848-500	2CKA001754A4580		0.28	1
1-fold, antique brass anthracite	–	1721-845-500	2CKA001754A4585		0.3	1
1-fold, antique brass decor ivory	–	1721-846-500	2CKA001754A4590		0.3	1
1-fold, antique brass decor anthracite	–	1721-843-500	2CKA001754A4595		0.3	1
1-fold, ivory	–	1721-832-500	2CKA001754A4600		0.042	1
1-fold, anthracite	–	1721-831-500	2CKA001754A4605		0.042	1
2-fold, polished brass ivory	–	1722-838-500	2CKA001754A4561		0.42	1
2-fold, polished brass anthracite	–	1722-835-500	2CKA001754A4566		0.42	1
2-fold, polished brass decor ivory	–	1722-836-500	2CKA001754A4571		0.42	1
2-fold, polished brass decor anthracite	–	1722-833-500	2CKA001754A4576		0.42	1
2-fold, antique brass ivory	–	1722-848-500	2CKA001754A4581		0.44	1
2-fold, antique brass anthracite	–	1722-845-500	2CKA001754A4586		0.44	1
2-fold, antique brass decor ivory	–	1722-846-500	2CKA001754A4591		0.42	1
2-fold, antique brass decor anthracite	–	1722-843-500	2CKA001754A4596		0.44	1
2-fold, ivory	–	1722-832-500	2CKA001754A4601		0.064	1
2-fold, anthracite	–	1722-831-500	2CKA001754A4606		0.064	1
3-fold, polished brass ivory	–	1723-838-500	2CKA001754A4562		0.54	1
3-fold, polished brass anthracite	–	1723-835-500	2CKA001754A4567		0.54	1
3-fold, polished brass decor ivory	–	1723-836-500	2CKA001754A4572		0.56	1
3-fold, polished brass decor anthracite	–	1723-833-500	2CKA001754A4577		0.56	1
3-fold, antique brass ivory	–	1723-848-500	2CKA001754A4582		0.56	1
3-fold, antique brass anthracite	–	1723-845-500	2CKA001754A4587		0.54	1
3-fold, antique brass decor ivory	–	1723-846-500	2CKA001754A4592		0.56	1
3-fold, antique brass decor anthracite	–	1723-843-500	2CKA001754A4597		0.56	1
3-fold, ivory	–	1723-832-500	2CKA001754A4602		0.096	1
3-fold, anthracite	–	1723-831-500	2CKA001754A4607		0.096	1

Continuation of table “Dynasty®” on next page

Continuation of table “Dynasty®”

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
4-fold, polished brass ivory	–	1724-838-500	2CKA001754A4563		0.7	1
4-fold, polished brass anthracite	–	1724-835-500	2CKA001754A4568		0.7	1
4-fold, polished brass decor ivory	–	1724-836-500	2CKA001754A4573		0.7	1
4-fold, polished brass decor anthracite	–	1724-833-500	2CKA001754A4578		0.7	1
4-fold, antique brass ivory	–	1724-848-500	2CKA001754A4583		0.72	1
4-fold, antique brass anthracite	–	1724-845-500	2CKA001754A4588		0.7	1
4-fold, antique brass decor ivory	–	1724-846-500	2CKA001754A4593		0.7	1
4-fold, antique brass decor anthracite	–	1724-843-500	2CKA001754A4598		0.72	1
4-fold, ivory	–	1724-832-500	2CKA001754A4603		0.28	1
4-fold, anthracite	–	1724-831-500	2CKA001754A4608		0.28	1
5-fold, polished brass ivory	–	1725-838-500	2CKA001754A4564		0.82	1
5-fold, polished brass anthracite	–	1725-835-500	2CKA001754A4569		0.82	1
5-fold, polished brass decor ivory	–	1725-836-500	2CKA001754A4574		0.82	1
5-fold, polished brass decor anthracite	–	1725-833-500	2CKA001754A4579		0.82	1
5-fold, antique brass ivory	–	1725-848-500	2CKA001754A4584		0.84	1
5-fold, antique brass anthracite	–	1725-845-500	2CKA001754A4589		0.82	1
5-fold, antique brass decor ivory	–	1725-846-500	2CKA001754A4594		0.84	1
5-fold, antique brass decor anthracite	–	1725-843-500	2CKA001754A4599		0.84	1
5-fold, ivory	–	1725-832-500	2CKA001754A4604		0.34	1
5-fold, anthracite	–	1725-831-500	2CKA001754A4609		0.34	1

ABB i-bus® KNX

User Operation – Design Ranges – Frames

1721-45M-500

Busch-art linear® **NEW**

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, studio white	–	1721-44G-500	2CKA001754A4841		0,014	10
1-fold, studio white matt	–	1721-44M-500	2CKA001754A4842		0,014	10
1-fold, black matt	–	1721-45M-500	2CKA001754A4844		0,014	10
1-fold, glass black/gold	–	1721-4013	2CKA001754A4882		0,035	1
1-fold, glass blue	–	1721-4028	2CLA897100A3958		0,036	1
1-fold, aluminium silver	–	1721-4073	2CLA897100A1758		0,046	1
1-fold, wood oak	–	1721-4083	2CKA001754A4887		0,039	1
1-fold, wood walnut	–	1721-4086	2CKA001754A4892		0,038	1
1-fold, slate terra rosso	–	1721-4097	2CLA897100A2958		0,019	1
2-fold, studio white	–	1722-44G-500	2CKA001754A4849		0,023	10
2-fold, studio white matt	–	1722-44M-500	2CKA001754A4850		0,023	10
2-fold, black matt	–	1722-45M-500	2CKA001754A4852		0,023	10
2-fold, glass black/gold	–	1722-4013	2CKA001754A4883		0,055	1
2-fold, glass blue	–	1722-4028	2CLA897200A3958		0,060	1
2-fold, aluminium silver	–	1722-4073	2CLA897200A1758		0,072	1
2-fold, wood oak	–	1722-4083	2CKA001754A4888		0,055	1
2-fold, wood walnut	–	1722-4086	2CKA001754A4893		0,082	1
2-fold, slate terra rosso	–	1722-4097	2CLA897200A2958		0,055	1
3-fold, studio white	–	1723-44G-500	2CKA001754A4857		0,032	10
3-fold, studio white matt	–	1723-44M-500	2CKA001754A4858		0,032	10
3-fold, black matt	–	1723-45M-500	2CKA001754A4860		0,032	10
3-fold, glass black/gold	–	1723-4013	2CKA001754A4884		0,075	1
3-fold, glass blue	–	1723-4028	2CLA897300A3958		0,085	1
3-fold, aluminium silver	–	1723-4073	2CLA897300A1758		0,098	1
3-fold, wood oak	–	1723-4083	2CKA001754A4889		0,075	1
3-fold, wood walnut	–	1723-4086	2CKA001754A4894		0,075	1
3-fold, slate terra rosso	–	1723-4097	2CLA897300A2958		0,043	1
4-fold, studio white	–	1724-44G-500	2CKA001754A4865		0,042	1
4-fold, studio white matt	–	1724-44M-500	2CKA001754A4866		0,042	1
4-fold, black matt	–	1724-45M-500	2CKA001754A4868		0,042	1
4-fold, glass black/gold	–	1724-4013	2CKA001754A4885		0,110	1
4-fold, glass blue	–	1724-4028	2CLA897400A3958		0,108	1
4-fold, aluminium silver	–	1724-4073	2CLA897400A1758		0,128	1
4-fold, wood oak	–	1724-4083	2CKA001754A4890		0,100	1
4-fold, wood walnut	–	1724-4086	2CKA001754A4895		0,100	1
4-fold, slate terra rosso	–	1724-4097	2CLA897400A2958		0,094	1
5-fold, studio white	–	1725-44G-500	2CKA001754A4873		0,050	1
5-fold, studio white matt	–	1725-44M-500	2CKA001754A4874		0,050	1
5-fold, black matt	–	1725-45M-500	2CKA001754A4876		0,050	1
5-fold, glass black/gold	–	1725-4013	2CKA001754A4886		0,150	1
5-fold, glass blue	–	1725-4028	2CLA897500A3958		0,176	1
5-fold, aluminium silver	–	1725-4073	2CLA897500A1758		0,153	1
5-fold, wood oak	–	1725-4083	2CKA001754A4891		0,126	1
5-fold, wood walnut	–	1725-4086	2CKA001754A4896		0,125	1
5-fold, slate terra rosso	–	1725-4097	2CLA897500A2958		0,072	1

1721-441M-500

Busch-art linear® with decor ring **NEW**

For vertical and horizontal installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1-fold, studio white matt/ rose gold	–	1721-441M-500	2CKA001754A4905		0,015	10
1-fold, black matt/gold	–	1721-453M-500	2CKA001754A4906		0,015	10
1-fold, black matt/chrome	–	1721-456M-500	2CKA001754A4907		0,015	10
2-fold, studio white matt/ rose gold	–	1722-441M-500	2CKA001754A4911		0,024	10
2-fold, black matt/gold	–	1722-453M-500	2CKA001754A4912		0,027	10
2-fold, black matt/chrome	–	1722-456M-500	2CKA001754A4913		0,024	10
3-fold, studio white matt/ rose gold	–	1723-441M-500	2CKA001754A4917		0,027	10
3-fold, black matt/gold	–	1723-453M-500	2CKA001754A4918		0,034	10
3-fold, black matt/chrome	–	1723-456M-500	2CKA001754A4919		0,034	10
4-fold, studio white matt/ rose gold	–	1724-441M-500	2CKA001754A4923		0,043	1
4-fold, black matt/gold	–	1724-453M-500	2CKA001754A4924		0,043	1
4-fold, black matt/chrome	–	1724-456M-500	2CKA001754A4925		0,043	1
5-fold, studio white matt/ rose gold	–	1725-441M-500	2CKA001754A4929		0,053	1
5-fold, black matt/gold	–	1725-453M-500	2CKA001754A4930		0,053	1
5-fold, black matt/chrome	–	1725-456M-500	2CKA001754A4931		0,099	1

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit

The push-button coupling unit with a centre position offers maximum flexibility. Installed in a flush-mounted wall box, it accepts switch rockers from conventional switch ranges* like a completely standard flush-mounted insert. Covers from all conventional ranges can now be used for KNX. This offers maximum freedom in the selection of the switch range and makes retrofitting easier.

01

02

03

04



Features

Easy mounting and uncomplicated commissioning
All flush-mounted switch ranges* can be used for the ABB i-bus® KNX
Affordable solution for renovations
Status/orientation light (red/green/OFF)
(only with 1 gang push-button/switches)
Integration in surface-mounted water protected units

01	Push-button coupler 2 gang with integrated bus coupler
02	Push-button coupler 4 gang with integrated bus coupler
03	Push-button coupler 2 gang for ocean with integrated bus coupler
04	Push-button coupler 4 gang for ocean with integrated bus coupler

Design without limits. The push-button coupling unit includes the complete range* of switches for KNX. Switch rockers from all switch ranges can now be converted to KNX push buttons, which not only switch on and off but also dim or show the status with an LED (6108/01 and 6108/04 only). 1 gang and 2 gang models for single and 2 gang switch rockers are available.

KNX – water protected
The push-button coupling unit also allows special products to be used for KNX. Special models for water-protected installation allow covers from, for example, the ocean® surface-mounted range to be used. This means that KNX sensors can also be safely installed in a cellar, outside on a patio or in commercial applications.
Temperature range: –25 °C to +45 °C.

*except impuls, basic55® and All Weather 44 Busch-Jaeger switch ranges only available for selected markets. For further information please contact your local ABB office.



6108/06-AP-500

Push-button coupler 2 gang with integrated bus coupler

For contacting conventional 1 gang rocker switches. With middle position. For inserting in the ocean surface-mounted housing. Enclosed mounting plate for the following ranges: Busch-Duro 2000 SI/SI Linear, Reflex SI/SI Linear, future® linear, alpha, solo®, Busch-axcent®, carat® and pure stainless steel. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
1/2-fold	–	6108/06-AP-500	2CKA006133A0225		0.1	1
2/4-fold	–	6108/07-AP-500	2CKA006133A0227		0.091	1

6108/06-500

Push-button coupler 2 gang with integrated bus coupler

For contacting 1 gang rocker 6230-10-xxx, 6231-10-xxx, 6232-10-xxx, 6233-10-xxx und 6234-10-xxx. With integrated temperature sensor. Support of KNX functions through innovative colour concept (yellow=lighting, blue=blind, orange=RTC, magenta=scene and white=neutral/no function assigned) or standard illumination red/green. With middle position. The bus connection is provided via the enclosed bus terminal.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6108/06-500	2CKA006133A0221		0.06	1

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit

SR-1-84

Rocker 1 gang, without printing

As cover for KNX 2 gang push-button coupling unit (6108/06-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	SR-1-212	2CKA006220A0182		0.017	1
alpine white	–	SR-1-214	2CKA006220A0183		0.017	1
future® linear						
anthracite	–	SR-1-81	2CKA006220A0137		0.017	1
ivory	–	SR-1-82	2CKA006220A0516		0.018	1
aluminium silver	–	SR-1-83	2CKA006220A0138		0.017	1
studio white	–	SR-1-84	2CKA006220A0139		0.017	1
studio white matt	–	SR-1-884	2CKA006220A0601		0.018	1
black, matt	–	SR-1-885	2CKA006220A0618		0.018	1
solo®						
ivory	–	SR-1-82	2CKA006220A0516		0.018	1
studio white	–	SR-1-84	2CKA006220A0139		0.017	1
grey metallic	–	SR-1-803	2CKA006220A0550		0.018	1
Busch-axcent®						
studio white	–	SR-1-84	2CKA006220A0139		0.017	1
pure stainless steel						
stainless steel	–	SR-1-866	2CKA006220A0533		0.016	1
carat®						
anthracite	–	SR-1-81	2CKA006220A0137		0.017	1
ivory	–	SR-1-82	2CKA006220A0516		0.018	1
studio white	–	SR-1-84	2CKA006220A0139		0.017	1
Dynasty®						
anthracite	–	SR-1-81	2CKA006220A0137		0.017	1
ivory	–	SR-1-82	2CKA006220A0516		0.018	1
antique brass	–	SR-1-840	2CKA006220A0371		0.018	1

SRL-1-84

Rocker 1 gang, with “Light” icon

As cover for KNX 2 gang push-button coupling unit (6108/06-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	SRL-1-212	2CKA006220A0184		0.013	1
alpine white	–	SRL-1-214	2CKA006220A0185		0.013	1
future® linear						
anthracite	–	SRL-1-81	2CKA006220A0140		0.017	1
ivory	–	SRL-1-82	2CKA006220A0517		0.014	1
aluminium silver	–	SRL-1-83	2CKA006220A0141		0.017	1
studio white	–	SRL-1-84	2CKA006220A0142		0.017	1
studio white matt	–	SRL-1-884	2CKA006220A0602		0.018	1
black, matt	–	SRL-1-885	2CKA006220A0619		0.018	1
solo®						
ivory	–	SRL-1-82	2CKA006220A0517		0.014	1
studio white	–	SRL-1-84	2CKA006220A0142		0.017	1
grey metallic	–	SRL-1-803	2CKA006220A0551		0.018	1
Busch-axcent®						
studio white	–	SRL-1-84	2CKA006220A0142		0.017	1
pure stainless steel						
stainless steel	–	SRL-1-866	2CKA006220A0534		0.014	1
carat®						
anthracite	–	SRL-1-81	2CKA006220A0140		0.017	1
ivory	–	SRL-1-82	2CKA006220A0517		0.014	1
studio white	–	SRL-1-84	2CKA006220A0142		0.017	1
Dynasty®						
anthracite	–	SRL-1-81	2CKA006220A0140		0.017	1
ivory	–	SRL-1-82	2CKA006220A0517		0.014	1
antique brass	–	SRL-1-840	2CKA006220A0372		0.018	1

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit

SRB-1-84

Rocker 1 gang, with “Blind” icon

As cover for KNX 2 gang push-button coupling unit (6108/06-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	SRB-1-212	2CKA006220A0186		0.013	1
alpine white	–	SRB-1-214	2CKA006220A0187		0.013	1
future® linear						
anthracite	–	SRB-1-81	2CKA006220A0143		0.013	1
ivory	–	SRB-1-82	2CKA006220A0518		0.014	1
aluminium silver	–	SRB-1-83	2CKA006220A0144		0.017	1
studio white	–	SRB-1-84	2CKA006220A0145		0.017	1
studio white matt	–	SRB-1-884	2CKA006220A0603		0.018	1
black, matt	–	SRB-1-885	2CKA006220A0620		0.018	1
solo®						
ivory	–	SRB-1-82	2CKA006220A0518		0.014	1
studio white	–	SRB-1-84	2CKA006220A0145		0.017	1
grey metallic	–	SRB-1-803	2CKA006220A0552		0.018	1
Busch-axcent®						
studio white	–	SRB-1-84	2CKA006220A0145		0.017	1
pure stainless steel						
stainless steel	–	SRB-1-866	2CKA006220A0535		0.014	1
carat®						
anthracite	–	SRB-1-81	2CKA006220A0143		0.013	1
ivory	–	SRB-1-82	2CKA006220A0518		0.014	1
studio white	–	SRB-1-84	2CKA006220A0145		0.017	1
Dynasty®						
anthracite	–	SRB-1-81	2CKA006220A0143		0.013	1
ivory	–	SRB-1-82	2CKA006220A0518		0.014	1
antique brass	–	SRB-1-840	2CKA006220A0373		0.018	1

SRS-1-84

Rocker 1 gang, with “Scene” icon

As cover for KNX 2 gang push-button coupling unit (6108/06-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	SRS-1-212	2CKA006220A0188		0.013	1
alpine white	–	SRS-1-214	2CKA006220A0189		0.013	1
future® linear						
anthracite	–	SRS-1-81	2CKA006220A0146		0.017	1
ivory	–	SRS-1-82	2CKA006220A0519		0.014	1
aluminium silver	–	SRS-1-83	2CKA006220A0147		0.017	1
studio white	–	SRS-1-84	2CKA006220A0148		0.017	1
studio white matt	–	SRS-1-884	2CKA006220A0604		0.018	1
black, matt	–	SRS-1-885	2CKA006220A0621		0.018	1
solo®						
ivory	–	SRS-1-82	2CKA006220A0519		0.014	1
studio white	–	SRS-1-84	2CKA006220A0148		0.017	1
grey metallic	–	SRS-1-803	2CKA006220A0553		0.015	1
Busch-axcent®						
studio white	–	SRS-1-84	2CKA006220A0148		0.017	1
pure stainless steel						
stainless steel	–	SRS-1-866	2CKA006220A0536		0.01	1
carat®						
anthracite	–	SRS-1-81	2CKA006220A0146		0.017	1
ivory	–	SRS-1-82	2CKA006220A0519		0.014	1
studio white	–	SRS-1-84	2CKA006220A0148		0.017	1
Dynasty®						
anthracite	–	SRS-1-81	2CKA006220A0146		0.017	1
ivory	–	SRS-1-82	2CKA006220A0519		0.014	1
antique brass	–	SRS-1-840	2CKA006220A0374		0.018	1

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit

SRD-1-84

Rocker 1 gang, with “Dimmer” icon

As cover for KNX 2 gang push-button coupling unit (6108/06-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	SRD-1-212	2CKA006220A0190		0.013	1
alpine white	–	SRD-1-214	2CKA006220A0191		0.013	1
future® linear						
anthracite	–	SRD-1-81	2CKA006220A0149		0.017	1
ivory	–	SRD-1-82	2CKA006220A0520		0.014	1
aluminium silver	–	SRD-1-83	2CKA006220A0150		0.017	1
studio white	–	SRD-1-84	2CKA006220A0151		0.017	1
studio white matt	–	SRD-1-884	2CKA006220A0605		0.018	1
black, matt	–	SRD-1-885	2CKA006220A0622		0.018	1
solo®						
ivory	–	SRD-1-82	2CKA006220A0520		0.014	1
studio white	–	SRD-1-84	2CKA006220A0151		0.017	1
grey metallic	–	SRD-1-803	2CKA006220A0554		0.018	1
Busch-axcent®						
studio white	–	SRD-1-84	2CKA006220A0151		0.017	1
pure stainless steel						
stainless steel	–	SRD-1-866	2CKA006220A0537		0.018	1
carat®						
anthracite	–	SRD-1-81	2CKA006220A0149		0.017	1
ivory	–	SRD-1-82	2CKA006220A0520		0.014	1
studio white	–	SRD-1-84	2CKA006220A0151		0.017	1
Dynasty®						
anthracite	–	SRD-1-81	2CKA006220A0149		0.017	1
ivory	–	SRD-1-82	2CKA006220A0520		0.014	1
antique brass	–	SRD-1-840	2CKA006220A0375		0.018	1

6108/07-500

Push-button coupling 4 gang with integrated bus coupler

Support of KNX functions through innovative colour concept yellow = lighting, blue = blind, orange = RTC, magenta = scene and white = neutral/no function assigned) or standard illumination red/green. With middle position. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6108/07-500	2CKA006133A0223		0.075	1

SR-2-84

SRB-2-84

Pack unit pc.	Weight 1 pc. kg	Description	Rocker 2 gang left/right, without printing As cover for KNX 4 gang push-button coupling unit (6108/07-500).			Rocker 2 gang left/right, with “Blind” icon As cover for KNX 4 gang push-button coupling unit (6108/07-500).		
			Order details		Price 1 pc.	Order details		Price 1 pc.
			Type	Order code	€	Type	Order code	€
		Reflex SI						
		white	SR-2-212	2CKA006220A0192		SRB-2-212	2CKA006220A0196	
		alpine white	SR-2-214	2CKA006220A0193		SRB-2-214	2CKA006220A0197	
		future® linear						
		anthracite	SR-2-81	2CKA006220A0152		SRB-2-81	2CKA006220A0158	
		ivory	SR-2-82	2CKA006220A0521		SRB-2-82	2CKA006220A0523	
		aluminium silver	SR-2-83	2CKA006220A0153		SRB-2-83	2CKA006220A0159	
		studio white	SR-2-84	2CKA006220A0154		SRB-2-84	2CKA006220A0160	
		studio white matt	SR-2-884	2CKA006220A0606		SRB-2-884	2CKA006220A0608	
		black, matt	SR-2-885	2CKA006220A0623		SRB-2-885	2CKA006220A0625	
		solo®						
		ivory	SR-2-82	2CKA006220A0521		SRB-2-82	2CKA006220A0523	
		studio white	SR-2-84	2CKA006220A0154		SRB-2-84	2CKA006220A0160	
		grey metallic	SR-2-803	2CKA006220A0555		SRB-2-803	2CKA006220A0557	
		Busch-axcent®						
		studio white	SR-2-84	2CKA006220A0154		SRB-2-84	2CKA006220A0160	
		pure stainless steel						
		stainless steel	SR-2-866	2CKA006220A0538		SRB-2-866	2CKA006220A0540	
		carat®						
		anthracite	SR-2-81	2CKA006220A0152		SRB-2-81	2CKA006220A0158	
		ivory	SR-2-82	2CKA006220A0521		SRB-2-82	2CKA006220A0523	
		studio white	SR-2-84	2CKA006220A0154		SRB-2-84	2CKA006220A0160	
		Dynasty®						
		anthracite	SR-2-81	2CKA006220A0152		SRB-2-81	2CKA006220A0158	
		ivory	SR-2-82	2CKA006220A0521		SRB-2-82	2CKA006220A0523	
		antique brass	SR-2-840	2CKA006220A0376		SRB-2-840	2CKA006220A0378	

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit

SRL-2-L-84

SRL-2-R-84

			Rocker 2 gang left, with “Light” icon As cover for KNX 4 gang push-button coupling unit (6108/07-500).			**Rocker 2 gang right, with “Light” icon** As cover for KNX 4 gang push-button coupling unit (6108/07-500).		
Pack unit pc.	**Weight 1 pc. kg**	**Description**	**Order details**		**Price 1 pc.**	**Order details**		**Price 1 pc.**
			Type	**Order code**	**€**	**Type**	**Order code**	**€**
		Reflex SI						
		white	SRL-2-L-212	2CKA006220A0194		SRL-2-R-212	2CKA006220A0202	
		alpine white	SRL-2-L-214	2CKA006220A0195		SRL-2-R-214	2CKA006220A0203	
		future® linear						
		anthracite	SRL-2-L-81	2CKA006220A0155		SRL-2-R-81	2CKA006220A0167	
		ivory	SRL-2-L-82	2CKA006220A0522		SRL-2-R-82	2CKA006220A0527	
		aluminium silver	SRL-2-L-83	2CKA006220A0156		SRL-2-R-83	2CKA006220A0168	
		studio white	SRL-2-L-84	2CKA006220A0157		SRL-2-R-84	2CKA006220A0169	
		studio white matt	SRL-2-L-884	2CKA006220A0607		SRL-2-R-884	2CKA006220A0612	
		black, matt	SRL-2-L-885	2CKA006220A0624		SRL-2-R-885	2CKA006220A0629	
		solo®						
		ivory	SRL-2-L-82	2CKA006220A0522		SRL-2-R-82	2CKA006220A0527	
		studio white	SRL-2-L-84	2CKA006220A0157		SRL-2-R-84	2CKA006220A0169	
		grey metallic	SRL-2-L-803	2CKA006220A0556		SRL-2-R-803	2CKA006220A0561	
		Busch-axcent®						
		studio white	SRL-2-L-84	2CKA006220A0157		SRL-2-R-84	2CKA006220A0169	
		pure stainless steel						
		stainless steel	SRL-2-L-866	2CKA006220A0539		SRL-2-R-866	2CKA006220A0544	
		carat®						
		anthracite	SRL-2-L-81	2CKA006220A0155		SRL-2-R-81	2CKA006220A0167	
		ivory	SRL-2-L-82	2CKA006220A0522		SRL-2-R-82	2CKA006220A0527	
		studio white	SRL-2-L-84	2CKA006220A0157		SRL-2-R-84	2CKA006220A0169	
		Dynasty®						
		anthracite	SRL-2-L-81	2CKA006220A0155		SRL-2-R-81	2CKA006220A0167	
		ivory	SRL-2-L-82	2CKA006220A0522		SRL-2-R-82	2CKA006220A0527	
		antique brass	SRL-2-L-840	2CKA006220A0377		SRL-2-R-840	2CKA006220A0381	

SRS-2-L-84

SRS-2-R-84

			Rocker 2 gang left, with “Scene” icon As cover for KNX 4 gang push-button coupling unit (6108/07-500).			**Rocker 2 gang right, with “Scene” icon** As cover for KNX 4 gang push-button coupling unit (6108/07-500).		
Pack unit pc.	**Weight 1 pc. kg**	**Description**	**Order details**		**Price 1 pc.**	**Order details**		**Price 1 pc.**
			Type	**Order code**	**€**	**Type**	**Order code**	**€**
		Reflex SI						
		white	SRS-2-L-212	2CKA006220A0198		SRS-2-R-212	2CKA006220A0206	
		alpine white	SRS-2-L-214	2CKA006220A0199		SRS-2-R-214	2CKA006220A0207	
		future® linear						
		anthracite	SRS-2-L-81	2CKA006220A0161		SRS-2-R-81	2CKA006220A0173	
		ivory	SRS-2-L-82	2CKA006220A0524		SRS-2-R-82	2CKA006220A0528	
		aluminium silver	SRS-2-L-83	2CKA006220A0162		SRS-2-R-83	2CKA006220A0174	
		studio white	SRS-2-L-84	2CKA006220A0163		SRS-2-R-84	2CKA006220A0175	
		studio white matt	SRS-2-L-884	2CKA006220A0609		SRS-2-R-884	2CKA006220A0613	
		black, matt	SRS-2-L-885	2CKA006220A0626		SRS-2-R-885	2CKA006220A0630	
		solo®						
		ivory	SRS-2-L-82	2CKA006220A0524		SRS-2-R-82	2CKA006220A0528	
		studio white	SRS-2-L-84	2CKA006220A0163		SRS-2-R-84	2CKA006220A0175	
		grey metallic	SRS-2-L-803	2CKA006220A0558		SRS-2-R-803	2CKA006220A0562	
		Busch-axcent®						
		studio white	SRS-2-L-84	2CKA006220A0163		SRS-2-R-84	2CKA006220A0175	
		pure stainless steel						
		stainless steel	SRS-2-L-866	2CKA006220A0541		SRS-2-R-866	2CKA006220A0545	
		carat®						
		anthracite	SRS-2-L-81	2CKA006220A0161		SRS-2-R-81	2CKA006220A0173	
		ivory	SRS-2-L-82	2CKA006220A0524		SRS-2-R-82	2CKA006220A0528	
		studio white	SRS-2-L-84	2CKA006220A0163		SRS-2-R-84	2CKA006220A0175	
		Dynasty®						
		anthracite	SRS-2-L-81	2CKA006220A0161		SRS-2-R-81	2CKA006220A0173	
		ivory	SRS-2-L-82	2CKA006220A0524		SRS-2-R-82	2CKA006220A0528	
		antique brass	SRS-2-L-840	2CKA006220A0379		SRS-2-R-840	2CKA006220A0382	

ABB i-bus® KNX

User Operation – Design Ranges – Push Button Coupling Unit

SRD-2-L-84

SRD-2-R-84

			Rocker 2 gang left, with “Dimmer” icon As cover for KNX 4 gang push-button coupling unit (6108/07-500).			**Rocker 2 gang right, with “Dimmer” icon** As cover for KNX 4 gang push-button coupling unit (6108/07-500).		
Pack unit pc.	**Weight 1 pc. kg**	**Description**	**Order details**		**Price 1 pc.**	**Order details**		**Price 1 pc.**
			Type	**Order code**	**€**	**Type**	**Order code**	**€**
		Reflex SI						
		white	SRD-2-L-212	2CKA006220A0200		SRD-2-R-212	2CKA006220A0261	
		alpine white	SRD-2-L-214	2CKA006220A0201		SRD-2-R-214	2CKA006220A0262	
		future® linear						
		anthracite	SRD-2-L-81	2CKA006220A0164		SRD-2-R-81	2CKA006220A0258	
		ivory	SRD-2-L-82	2CKA006220A0525		SRD-2-R-82	2CKA006220A0526	
		aluminium silver	SRD-2-L-83	2CKA006220A0165		SRD-2-R-83	2CKA006220A0259	
		studio white	SRD-2-L-84	2CKA006220A0166		SRD-2-R-84	2CKA006220A0260	
		studio white matt	SRD-2-L-884	2CKA006220A0610		SRD-2-R-884	2CKA006220A0611	
		black, matt	SRD-2-L-885	2CKA006220A0627		SRD-2-R-885	2CKA006220A0628	
		solo®						
		ivory	SRD-2-L-82	2CKA006220A0525		SRD-2-R-82	2CKA006220A0526	
		studio white	SRD-2-L-84	2CKA006220A0166		SRD-2-R-84	2CKA006220A0260	
		grey metallic	SRD-2-L-803	2CKA006220A0559		SRD-2-R-803	2CKA006220A0560	
		Busch-axcent®						
		studio white	SRD-2-L-84	2CKA006220A0166		SRD-2-R-84	2CKA006220A0260	
		pure stainless steel						
		stainless steel	SRD-2-L-866	2CKA006220A0542		SRD-2-R-866	2CKA006220A0543	
		carat®						
		anthracite	SRD-2-L-81	2CKA006220A0164		SRD-2-R-81	2CKA006220A0258	
		ivory	SRD-2-L-82	2CKA006220A0525		SRD-2-R-82	2CKA006220A0526	
		studio white	SRD-2-L-84	2CKA006220A0166		SRD-2-R-84	2CKA006220A0260	
		Dynasty®						
		anthracite	SRD-2-L-81	2CKA006220A0164		SRD-2-R-81	2CKA006220A0258	
		ivory	SRD-2-L-82	2CKA006220A0525		SRD-2-R-82	2CKA006220A0526	
		antique brass	SRD-2-L-840	2CKA006220A0380		SRD-2-R-840	2CKA006220A0383	

ABB i-bus® KNX

User Operation – Design Ranges

6108/60-500

Control Element, 6 gang with Universal Input, 5 gang

Control element with a maximum of 6 control functions and an RTC extension unit (slave). Primary function for calling up the main function. Status bar for indication/display of operating or RTC functions. Operation is carried out via cover plate 6108/61-xxx. With actual value temperature display. With display of set-value temperature. With universal input with: - max. of 5 binary inputs - 4 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V - 2 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V and an external temperature sensor PT1000 / T6226. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6108/60-500	2CKA006115A0454			1

6108/61-212-500

Cover Plate for KNX Control Element, 7 gang

As cover for control element, 7 gang (6108/60).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	6108/61-212-500	2CKA006115A0474		0.012	1
alpine white	–	6108/61-214-500	2CKA006115A0475		0.012	1
platinum [1]	–	6108/61-20-500	2CKA006115A0476		0.016	1
bronze [1]	–	6108/61-21-500	2CKA006115A0477		0.016	1
ivory/white	–	6108/61-22G-500	2CKA006115A0478		0.016	1
studio white	–	6108/61-24G-500	2CKA006115A0480		0.016	1
palladium	–	6108/61-260-500	2CKA006115A0481		0.016	1
titanium [1]	–	6108/61-266-500	2CKA006115A0482		0.016	1
anthracite	–	6108/61-81-500	2CKA006115A0483		0.018	1
ivory white	–	6108/61-82-500	2CKA006115A0484		0.018	1
aluminium silver	–	6108/61-83-500	2CKA006115A0485		0.018	1
studio white	–	6108/61-84-500	2CKA006115A0486		0.018	1
studio white matt	–	6108/61-884-500	2CKA006115A0487		0.018	1
black matt	–	6108/61-885-500	2CKA006115A0488		0.018	1
stainless steel	–	6108/61-866-500	2CKA006115A0492		0.018	1

[1] To be discontinued

6108/61-914

Cover Plate, Control Element, 7 gang

As cover for control element, 7 gang (6108/60).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	6108/61-914	2CKA006155A0115			1
stainless steel	–	6108/61-840-500	2CKA006155A0121		0.018	1

ABB i-bus® KNX

User Operation – Design Ranges

6109/05-500

Room Temperature Controller with 5 gang Universal Input, FM

Room temperature controller without “local control” and without internal temperature sensor. With universal input with: - max. of 5 binary inputs - 4 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V - 2 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V and an external temperature sensor PT1000 / T6226. Master/slave configuration. With base-load operation. The bus can be connected via enclosed terminal block. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6109/05-500	2CKA006181A0013		0.08	1

6109/08-500

Room Temperature Controller, Commercial, with 5 gang Universal Input, FM

Room thermostat without “local control” incl. insert for centre plate for cooling element. With universal input with: - max. of 5 binary inputs - 4 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V - 2 binary inputs and 1 analogue input for activating sensors with external power supply 1-10 V/0-10 V and an external temperature sensor PT1000 / T6226. Can only be used with a cover plate 2114-xxx or 6541-xxx, with the exception of 6541-20. -21.-260 and -266. Master/slave configuration. With base-load operation. The bus can be connected via enclosed terminal block. Class of temperature controller 1. Contribution to space heating energy efficiency 1.0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6109/08-500	2CKA006134A0313		0.138	1

6541-84

Cover Plate for Room Temperature Controller, Commercial

For room temperature controller, commercial.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
future® linear						
anthracite	–	6541-81	2CKA006599A2882		0.022	10
savanna/ivory	–	6541-82	2CKA006599A2832		0.022	10
aluminium silver [1]	–	6541-83	2CKA006599A2885		0.022	10
davos/studio white	–	6541-84	2CKA006599A2835		0.022	10
studio white, matt [1]	–	6541-884	2CKA006599A2962		0.022	10
black matt [1]	–	6541-885	2CKA006599A2967		0.022	10
solo®						
savanna/ivory	–	6541-82	2CKA006599A2832		0.022	10
davos/studio white	–	6541-84	2CKA006599A2835		0.022	10
carat®						
anthracite	–	6541-81	2CKA006599A2882		0.022	10
savanna/ivory	–	6541-82	2CKA006599A2832		0.022	10
davos/studio white	–	6541-84	2CKA006599A2835		0.022	10
pure stainless steel [1]						
stainless steel	–	6541-866	2CKA006599A2924		0.018	10
Busch-axcent®						
davos/studio white	–	6541-84	2CKA006599A2835		0.022	10
alpha						
studio white, high gloss [2]	–	6541-24G	2CKA006599A2332		0.02	10
Platinum [2]	–	6541-20	2CKA006599A1466		0.02	10
Bronze [2]	–	6541-21	2CKA006599A1524		0.02	10
titanium [2]	–	6541-266	2CKA006599A2856		0.02	10
impuls						
alpine white [2]	–	6541-74	2CKA006599A2076		0.019	
studio white matt [2]	–	6541-774	2CKA006599A2971		0.019	
black matt [2]	–	6541-775	2CKA006599A2975		0.019	
aluminium silver [2]	–	6541-783	2CKA006599A2919		0.019	
Busch-Duro 2000® SI						
white (SI-Series)	–	2114-212	2CKA006599A1193		0.016	10

[1] Surface painted
[2] To be discontinued

ABB i-bus® KNX

User Operation – Design Ranges

2114-214

Cover Plate for Temperature Controller, Commercial

For room temperature controller, commercial.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
alpine white (SI-Series)	–	2114-214-500	2CKA006599A3008		0.02	10

ABB i-bus® KNX

User Operation – Design Ranges – Room Temperature Controller

6108/18-500

Room thermostat, heating/cooling operation

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. For controlling commercially available valve drives. With display of set-value temperature. Master/slave configuration. With base-load operation. The bus can be connected via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6108/18-500	2CKA006134A0319		0.08	1

CP-FCC-212

Cover plate for fan coil controller

As cover for ABB-free@home® room temperature controller RTC-F-1. As cover for KNX room temperature controller (6108/18-500).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	CP-FCC-212	2CKA006220A0245		0.012	1
alpine white	–	CP-FCC-214	2CKA006220A0246		0.012	1
future® linear						
anthracite	–	CP-FCC-81	2CKA006220A0242		0.016	1
ivory	–	CP-FCC-82	2CKA006220A0532		0.016	1
aluminium silver	–	CP-FCC-83	2CKA006220A0243		0.016	1
studio white	–	CP-FCC-84	2CKA006220A0244		0.015	1
studio white matt	–	CP-FCC-884	2CKA006220A0617		0.016	1
black, matt	–	CP-FCC-885	2CKA006220A0634		0.016	1
solo®						
ivory	–	CP-FCC-82	2CKA006220A0532		0.016	1
studio white	–	CP-FCC-84	2CKA006220A0244		0.015	1
grey metallic	–	CP-FCC-803	2CKA006220A0566		0.016	1
Busch-axcent®						
studio white	–	CP-FCC-84	2CKA006220A0244		0.015	1
pure stainless steel						
stainless steel	–	CP-FCC-866	2CKA006220A0549		0.016	1
carat®						
anthracite	–	CP-FCC-81	2CKA006220A0242		0.016	1
ivory	–	CP-FCC-82	2CKA006220A0532		0.016	1
studio white	–	CP-FCC-84	2CKA006220A0244		0.015	1
Dynasty®						
anthracite	–	CP-FCC-81	2CKA006220A0242		0.016	1
ivory	–	CP-FCC-82	2CKA006220A0532		0.016	1

ABB i-bus® KNX

User Operation – Design Ranges – Room Temperature Controller

6109/18-500

Room Temperature Controller with 5 gang universal input, FM

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. With display of set-value temperature, master/slave configuration and base load operation. With universal inputs: a) max. of 5 binary inputs b) 4 binary inputs and 1 analogue input for activating sensors with external power supply 1 – 10 V/0 – 10 V or c) 2 binary inputs and 1 analogue input for activating sensors with external power supply 1 – 10 V/0 – 10 V and an external temperature sensor PT1000/T6226.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6109/18-500	2CKA006134A0315		0.144	1

6109/28-500

Room Temperature Controller with CO_2/moisture sensor, FM

Control element with room thermostat function and CO_2 moisture/air pressure sensor or triggering the heating, ventilation and fan-coil actuators. With display of set-value temperature, master/slave configuration and base load operation. With universal inputs: a) max. of 5 binary inputs b) 4 binary inputs and 1 analogue input for activating sensors with external power supply 1 – 10 V/0 – 10 V or c) 2 binary inputs and 1 analogue input for activating sensors with external power supply 1 – 10 V/0 – 10 V and an external temperature sensor PT1000/T6226.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6109/28-500	2CKA006134A0317		0.122	1

6109/03-214-500

Cover plate for Room Temperature Controller or
Room Temperature Controller with CO_2/moisture future® linear
As cover for room temperature controller with/without CO_2/moisture sensor (6109/18 and 6109/28).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Reflex SI						
white	–	6109/03-212-500	2CKA006155A0051		0.018	1
alpine white	–	6109/03-214-500	2CKA006155A0052		0.018	1
future® linear						
anthracite	–	6109/03-81-500	2CKA006155A0060		0.018	1
ivory/white	–	6109/03-82-500	2CKA006155A0061		0.018	1
aluminium silver	–	6109/03-83-500	2CKA006155A0062		0.018	1
studio white	–	6109/03-84-500	2CKA006155A0063		0.018	1
studio white matt	–	6109/03-884-500	2CKA006155A0064		0.018	1
black, matt	–	6109/03-885-500	2CKA006155A0065		0.018	1
solo®						
ivory/white	–	6109/03-82-500	2CKA006155A0061		0.018	1
studio white	–	6109/03-84-500	2CKA006155A0063		0.018	1
Busch-axcent®						
studio white	–	6109/03-84-500	2CKA006155A0063		0.018	1
pure stainless steel						
stainless steel	–	6109/03-866-500	2CKA006155A0069		0.018	1
carat®						
anthracite	–	6109/03-81-500	2CKA006155A0060		0.018	1
ivory/white	–	6109/03-82-500	2CKA006155A0061		0.018	1
studio white	–	6109/03-84-500	2CKA006155A0063		0.018	1
Dynasty®						
anthracite	–	6109/03-81-500	2CKA006155A0060		0.018	1
ivory/white	–	6109/03-82-500	2CKA006155A0061		0.018	1
antique brass	–	6109/03-840-500	2CKA006155A0114		0.018	1

ABB i-bus® KNX

User Operation – Design Ranges – Millenium

The Millenium collection is the first metal range to incorage the KNX system, the most intelligent way of managing spaces and optimizing performance in terms of energy savings. Millenium is based on a combinable concept which creates a very comprehensive range, suitable for any types of needs. This makes it the ideal collection for all types of homes, hotels, offices and shops.

01	Switch Sensor 2 gang KNX
02	Switch Sensor 4 gang KNX
03	Switch Sensor 6 gang KNX
04	Switch Sensor 6 gang KNX with IR
05	Busch watchdog 180° KNX
06	Room Thermostat KNX

01

Function
Switching | Dimming | Blinds | Sending values | Scenes etc.

Features
Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Control element: Switch contacts
Display elements: LED to indicate the function

02

Function
Switching | Dimming | Blinds | Sending values | Scenes etc.

Features
Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Control element: Switch contacts
Display elements: LED to indicate the function

03

Function
Switching | Dimming | Blinds | Sending values | Scenes etc.

Features
Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Control element: Switch contacts
Display elements: LED to indicate the function

Wide range. Millenium range offers special mounting plates for KNX sensors to reduce the height and improve the aesthetics for ultra slim design. The KNX sensors allow to replace the buttons with desired symbols in order to adjust the sensors to specific design and needs like light, blind, scene, RTC or fan coil. Millenium offers a wide and elegant choice of finishes in stainless steel material: from the Brush Stainless Steel, to the soft touch given by the Silk Black, and the luxury of the sophisticated gold finishes, Matt Gold and Antique Gold. Moreover, the range is now extended with two glass colors: White and Black glass to cater the luxury segment.

04

Function
Switching | Dimming | Blinds | Sending values | Scenes etc. | 6 gang sensor with IR.

Features
Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Control element: Switch contacts
Display elements: LED to indicate the function

05

Function
Movement sensor with up to four channels.
Detection range: frontal: 6 m, lateral: 6 m
Detection angle: 180°
Brightness limit value:
5 Lux - 150 Lux
Mounting height: 1.1 m

06

Function
Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. The controller is a thermostat for Fan Coil units in 2- and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode.

Features
Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)

Switch contacts for operating mode selection and dial for setpoint or fan speed adjustment.
Display elements: LCD showing operation modes.
Protection class (Device): IP 20
Temperature range (Device): –5 °C to +45 °C

The Millenium range is only available in the following countries: China, Dubai, India, Kuweit, Oman, Qatar, Saudi Arabia, Singapore, UAE and UK.
Frames and special mounting plates for KNX sensores have to ordered by:
ABB, S.A.
Low Voltage Products-Niessen, Oiartzun / Spain
www.abb.es/niessen

ABB i-bus® KNX

User Operation – Design Ranges – Millenium

6125/20-981-500

Switch Sensor 2 gang KNX
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.
Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C.
Dimensions (L x W x D): 53 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6125/20-981-500	2CKA006115A0443		0.083	1

6126/20-981-500

Switch Sensor 4 gang KNX
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.
Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C.
Dimensions (L x W x D): 53 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6126/20-981-500	2CKA006116A0218		0.084	1

6129/20-981-500

Switch Sensor 6 gang KNX
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.
Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C.
Dimensions (L x W x D): 53 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6129/20-981-500	2CKA006118A0104		0.085	1

6129/21-981-500

Switch Sensor 6 gang KNX with IR
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.
Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C.
Dimensions (L x W x D): 53 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6129/21-981-500	2CKA006118A0107		0.086	1

6124/08-981-500

Room Thermostat

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. The controller is a thermostat for Fan Coil units in 2- and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).

Switch contacts for operating mode selection and dial for setpoint or fan speed adjustment. Display elements: LCD showing operation modes. Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C. Dimensions (L x W x D): 53 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6124/08-981-500	2CKA006134A0309		0.101	1

Buttons with symbols

Buttons with symbols for Millenium control covers 1/2 gang, 2/4 gang, 3/6 gang and 3/6 gang with infrared.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Symbol for marking “Light”	–	6123/20-500	2CKA006123A0001		0.011	1
Symbol for marking “blinds”	–	6123/21-500	2CKA006123A0002		0.011	1
Symbol for marking “scene”	–	6123/22-500	2CKA006123A0003		0.011	1
Symbol for marking “temperature”	–	6123/23-500	2CKA006123A0004		0.011	1
Symbol for marking “ceiling light”	–	6123/24-500	2CKA006123A0005		0.003	1
Symbol for marking “Fan Coil”	–	6123/26-500	2CKA006123A0006		0.003	1

ABB i-bus® KNX

User Operation – Design Ranges – Millenium

Triple rocker / KNX frame 1 gang

Frame includes metal mounting plate. Dimensions: 86 mm x 86 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
stainless steel	–	AMD5153-ST	2CLA637100N1101		0.109	10
silk black	–	AMD5153-SB	2CLA637100N1501		0.111	10
antique gold	–	AMD5153-AG	2CLA637100N1601		0.111	10
matt gold	–	AMD5153-MG	2CLA637100N1701		0.111	10
dune sand	–	AMD5153-DU	2CLA637100N6201		0.111	10
mocha brown	–	AMD5153-MO	2CLA637100N6601		0.111	10
white glass	–	AMD5153-WG	2CLA637100N3001		0.205	10
black glass	–	AMD5153-BG	2CLA637100N3101		0.205	10

Triple rocker / KNX frame 2 gang

Frame includes metal mounting plate. Dimensions: 86 mm x 147 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
stainless steel	–	AMD5253-ST	2CLA667200N1101		0.177	10
silk black	–	AMD5253-SB	2CLA667200N1501		0.177	10
antique gold	–	AMD5253-AG	2CLA667200N1601		0.176	10
matt gold	–	AMD5253-MG	2CLA667200N1701		0.178	10
dune sand	–	AMD5253-DU	2CLA667200N6201		0.177	10
mocha brown	–	AMD5253-MO	2CLA667200N6601		0.177	10
white glass	–	AMD5253-WG	2CLA667200N3001		0.315	5
black glass	–	AMD5253-BG	2CLA667200N3101		0.315	5

AMD5053

Special metal mounting plate for KNX sensors

Allows reduction height of KNX sensors to 1 mm. Only for following items: AMD72053-AN, AMD74053-AN, AMD76053-AN, AMD76153-AN.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Special metal mounting plate for KNX sensors 1 gang	–	AMD5053	2CLA627190N1001		0.032	1

Notes

ABB i-bus® KNX

User Operation – Design Ranges – Zenit

01	Switch Sensor 2 gang KNX
02	Switch Sensor 4 gang KNX
03	Switch Sensor 6 gang KNX
04	Switch Sensor 6 gang KNX with IR
05	Busch watchdog 180° KNX
06	Room Thermostat KNX

01

Function
Switching | Dimming | Blinds | Sending values | Scenes etc.

Features
Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Control element: Switch contacts
Display elements: LED to indicate the function

02

Function
Switching | Dimming | Blinds | Sending values | Scenes etc.

Features
Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Control element: Switch contacts
Display elements: LED to indicate the function

03

Function
Switching | Dimming | Blinds | Sending values | Scenes etc.

Features
Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Control element: Switch contacts
Display elements: LED to indicate the function

Zenit is based on a combinable concept which creates a very comprehensive range, suitable for any type of needs. Optimizing comfort, safety and efficiency of homes and buildings: Providing with complete comfort solutions to satisfy all type of needs and projects. Ensuring safety and protection of persons and goods. Saving energy by using only the amount of energy required.

Zenit offers two different mounting plates for KNX sensors corresponding to different market standards: VDE and NEMA.

04

Function
Switching | Dimming | Blinds | Sending values | Scenes etc. | 6 gang sensor with IR.

Features
Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Control element: Switch contacts
Display elements: LED to indicate the function

05

Function
Movement sensor with up to four channels.
Detection range: frontal: 6 m, lateral: 6 m
Detection angle: 180°
Brightness limit value: 5 Lux - 150 Lux
Mounting height: 1.1 m

06

Function
Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. The controller is a thermostat for Fan Coil units in 2- and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode.

Features
Incl. 10 logic channels (light scene actuator | sequence actuator | logic gates, etc.)
Switch contacts for operating mode selection and dial for setpoint or fan speed adjustment.
Display elements: LCD showing operation modes.
Protection class (Device): IP 20
Temperature range (Device): –5 °C to +45 °C

The Zenit VDE range is only available in the following countries:
Spain, Portugal, Russia, France
The Zenit NEMA range is only available in the following countries:
Latin America, Australia, Thailand, Vietnam.
Sensors, frames and special mounting plates for KNX sensores have to ordered by:
ABB, S.A.
Low Voltage Products-Niessen, Oiartzun / Spain
www.abb.es/niessen

ABB i-bus® KNX

User Operation – Design Ranges – Zenit

6125/98-509

1/2-fold sensor

Push switch function: switching / dimming / blind / sending values / scenes etc.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6125/98-509	2CKA006115A0444		0.077	1

N2221.2

Cover Zenit 1/2-fold

Cover Zenit 1/2-fold. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2221.2 BL	2CLA222120N1101		0.038	1
anthracite	–	N2221.2 AN	2CLA222120N1801		0.038	1
silver	–	N2221.2 PL	2CLA222120N1301		0.038	1

6126/98-509

2/4-fold sensor

Push switch function: switching / dimming / blind / sending values / scenes etc.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
Control element: Switch contacts. Display elements: LED to indicate the function.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6126/98-509	2CKA006116A0219		0.079	1

N2221.4

Cover Zenit 2/4-fold

Cover Zenit 2/4-fold. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2221.4 BL	2CLA222140N1101		0.038	1
anthracite	–	N2221.4 AN	2CLA222140N1801		0.038	1
silver	–	N2221.4 PL	2CLA222140N1301		0.038	1

6129/96-509

3/6-fold sensor

Push switch function: switching / dimming / blind / sending values / scenes etc.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.)
Control element: Switch contacts. Display elements: LED to indicate the function.
Protection class (Device): IP 20. Temperature range (Device): –5 °C to +45 °C.
Dimensions (L x W x D): 44 mm x 44 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6129/96-509	2CKA006118A0105		0.08	1

N2221.6

Cover Zenit 3/6-fold

Cover Zenit 3/6-fold. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2221.6 BL	2CLA222160N1101		0.011	1
anthracite	–	N2221.6 AN	2CLA222160N1801		0.011	1
silver	–	N2221.6 PL	2CLA222160N1301		0.011	1

6129/98-509

3/6-fold sensor with IR

Push switch function: switching / dimming / blind / sending values / scenes etc.
Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
With infrared. Control element: Switch contacts. Display elements: LED to indicate the function.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6129/98-509	2CKA006118A0108		0.088	1

N2221.7

Cover Zenit 3/6-fold with IR

Cover Zenit 3/6-fold with IR. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2221.7 BL	2CLA222170N1101		0.011	1
anthracite	–	N2221.7 AN	2CLA222170N1801		0.011	1
silver	–	N2221.7 PL	2CLA222170N1301		0.011	1

ABB i-bus® KNX

User Operation – Design Ranges – Zenit

6124/88-509

Room thermostat heating / cooling Fan Coil

Control element with room thermostat function for triggering the heating, ventilation and fan-coil actuators. The controller is a thermostat for Fan Coil units in 2 - and 4-pipe systems and conventional heating or cooling systems. The fan stage can be switched manually or in automatic mode. Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.). Switch contacts for operating mode selection and dial for setpoint or fan speed adjustment. Display elements: LCD showing operation modes.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6124/88-509	2CKA006134A0310		0.096	1

N2240.4

Cover Zenit room thermostat

Cover Zenit room thermostat. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2240.4 BL	2CLA224040N1101		0.028	1
anthracite	–	N2240.4 AN	2CLA224040N1801		0.028	1
silver	–	N2240.4 PL	2CLA224040N1301		0.028	1

N2241.4

Cover Zenit watchdog

Cover Zenit watchdog. Available in white (BL), anthracite (AN) and silver (PL).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2241.4 BL	2CLA224140N1101		0.011	1
anthracite	–	N2241.4 AN	2CLA224140N1801		0.011	1
silver	–	N2241.4 PL	2CLA224140N1301		0.01	1

Buttons with symbols

Buttons with symbols for Zenit control covers 1/2 gang, 2/4 gang, 3/6 gang and 3/6 gang with infrared.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
Symbol for marking “Light”	–	6123/20-500	2CKA006123A0001		0.011	10
Symbol for marking “blinds”	–	6123/21-500	2CKA006123A0002		0.011	10
Symbol for marking “scene”		6123/22-500	2CKA006123A0003		0.011	10
Symbol for marking “temperature”	–	6123/23-500	2CKA006123A0004		0.011	10
Symbol for marking “ceiling light”	–	6123/24-500	2CKA006123A0005		0.003	10
Symbol for marking “Fan Coil”	–	6123/26-500	2CKA006123A0006		0.003	10

N2271 XX

Frames, 1 window, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2271 BL	2CLA227100N1102		0.032	1
anthracite	–	N2271 AN	2CLA227100N1802		0.03	1
champagne	–	N2271 CV	2CLA227100N1902		0.031	1
wengué	–	N2271 WG	2CLA227100N2102		0.043	1
slate	–	N2271 PZ	2CLA227100N2202		0.92	1
white glass	–	N2271 CB	2CLA227100N3002		0.083	1
black glass	–	N2271 CN	2CLA227100N3102		0.083	1
pearl glass	–	N2271 CP	2CLA227100N3502		0.085	1
coffee glass	–	N2271 CC	2CLA227100N3702		0.083	1
graphite glass	–	N2271 CF	2CLA227100N3802		0.085	1
champagne glass	–	N2271 CH	2CLA227100N3902		0.085	1
stainless steel	–	N2271 OX	2CLA227100N4002		0.2	1

Basic frame, 1 window, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2271.1 BL	2CLA227110N1102		0.021	1
silver	–	N2271.1 PL	2CLA227110N1302		0.021	1
anthracite	–	N2271.1 AN	2CLA227110N1802		0.019	1
champagne	–	N2271.1 CV	2CLA227110N1902		0.02	1

ABB i-bus® KNX

User Operation – Design Ranges – Zenit

N2272 BL

2 gang frames, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2272 BL	2CLA227200N1102		0.054	1
silver	–	N2272 PL	2CLA227200N1302		0.051	1
anthracite	–	N2272 AN	2CLA227200N1802		0.053	1
champagne	–	N2272 CV	2CLA227200N1902		0.052	1
wengué	–	N2272 WG	2CLA227200N2102		0.065	1
slate	–	N2272 PZ	2CLA227200N2202		0.154	1
white glass	–	N2272 CB	2CLA227200N3002		0.143	1
black glass	–	N2272 CN	2CLA227200N3102		0.136	1
pearl glass	–	N2272 CP	2CLA227200N3502		0.141	1
coffee glass	–	N2272 CC	2CLA227200N3702		0.142	1
graphite glass	–	N2272 CF	2CLA227200N3802		0.141	1
champagne glass	–	N2272 CH	2CLA227200N3902		0.14	1
stainless steel	–	N2272 OX	2CLA227200N4002		0.35	1

N2272.1 BL

2 gang frames – Basic, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2272.1 BL	2CLA227210N1102		0.036	1
silver	–	N2272.1 PL	2CLA227210N1302		0.035	1
anthracite	–	N2272.1 AN	2CLA227210N1802		0.034	1
champagne	–	N2272.1 CV	2CLA227210N1902		0.035	1

N2273 BL

3 gang frames, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2273 BL	2CLA227300N1102		0.08	1
silver	–	N2273 PL	2CLA227300N1302		0.079	1
anthracite	–	N2273 AN	2CLA227300N1802		0.079	1
champagne	–	N2273 CV	2CLA227300N1902		0.079	1
wengué	–	N2273 WG	2CLA227300N2102		0.099	1
slate	–	N2273 PZ	2CLA227300N2202		0.218	1
white glass	–	N2273 CB	2CLA227300N3002		0.2	1
black glass	–	N2273 CN	2CLA227300N3102		0.2	1
pearl glass	–	N2273 CP	2CLA227300N3502		0.2	1
coffee glass	–	N2273 CC	2CLA227300N3702		0.2	1
graphite glass	–	N2273 CF	2CLA227300N3802		0.2	1
champagne glass	–	N2273 CH	2CLA227300N3902		0.2	1
stainless steel	–	N2273 OX	2CLA227300N4002		0.52	1

N2273.1 BL

3 gang frames – Basic, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2273.1 BL	2CLA227310N1102		0.054	1
silver	–	N2273.1 PL	2CLA227310N1302		0.053	1
anthracite	–	N2273.1 AN	2CLA227310N1802		0.052	1
champagne	–	N2273.1 CV	2CLA227310N1902		0.055	1

ABB i-bus® KNX

User Operation – Design Ranges – Zenit

N2274 BL

4 gang frames, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2274 BL	2CLA227400N1102		0.102	1
silver	–	N2274 PL	2CLA227400N1302		0.102	1
anthracite	–	N2274 AN	2CLA227400N1802		0.103	1
champagne	–	N2274 CV	2CLA227400N1902		0.103	1
wengué	–	N2274 WG	2CLA227400N2102		0.123	1
slate	–	N2274 PZ	2CLA227400N2202		0.278	1
white glass	–	N2274 CB	2CLA227400N3002		0.26	1
black glass	–	N2274 CN	2CLA227400N3102		0.261	1
pearl glass	–	N2274 CP	2CLA227400N3502		0.261	1
coffee glass	–	N2274 CC	2CLA227400N3702		0.261	1
graphite glass	–	N2274 CF	2CLA227400N3802		0.261	1
champagne glass	–	N2274 CH	2CLA227400N3902		0.261	1
stainless steel	–	N2274 OX	2CLA227400N4002		0.647	1

N2274.1 BL

4 gang frames – Basic, Zenit VDE

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2274.1 BL	2CLA227410N1102		0.07	1
silver	–	N2274.1 PL	2CLA227410N1302		0.07	1
anthracite	–	N2274.1 AN	2CLA227410N1802		0.069	1
champagne	–	N2274.1 CV	2CLA227410N1902		0.069	1

N2372.1 XX

Frame, 2 modules, Zenit, NEMA

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	N2372.1 BL	2CLA237210N1102		0.067	1
silver	–	N2372.1 PL	2CLA237210N1302		0.047	1
anthracite	–	N2372.1 AN	2CLA237210N1802		0.047	1
champagne	–	N2372.1 CV	2CLA237210N1902		0.047	1
slate	–	N2372.1 PZ	2CLA237200N2202		0.047	1
white glass	–	N2372.1 CB	2CLA237200N3002		0.124	1
black glass	–	N2372.1 CN	2CLA237200N3102		0.14	1
stainless steel	–	N2372.1 OX	2CLA237200N4002		0.278	1

N2371.9V

Metal mounting plate

Mounting plate for 3 module box, facilitates the assembly of 1 and 2 module devices in vertical or horizontal installations.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
for vertical installation	–	N2371.9V	2CLA237190N1002		0.054	20

ABB i-bus® KNX

User Operation – Design Ranges – Zenit

AMD22710 BL

1 gang frame Zenit British Standard (includes mounting support)

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	AMD22710 BL	2CLA227100B1101			1
silver	–	AMD22710 PL	2CLA227100B1301			1
antrachite	–	AMD22710 AN	2CLA227100B1801			1
champagne	–	AMD22710 CV	2CLA227100B1901			1



AMD24720 BL

2 gang frame Zenit British Standard (includes mounting support)

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	AMD24720 BL	2CLA247200B1101			1
silver	–	AMD24720 PL	2CLA247200B1301			1
antrachite	–	AMD24720 AN	2CLA247200B1801			1
champagne	–	AMD24720 CV	2CLA247200B1901			1

AMD26731 BL

3 gang frame Zenit British Standard (includes mounting support)

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	AMD26731 BL	2CLA267310B1101			1
silver	–	AMD26731 PL	2CLA267310B1301			1
antrachite	–	AMD26731 AN	2CLA267310B1801			1
champagne	–	AMD26731 CV	2CLA267310B1901			1

AMD28741 BL

4 gang frame Zenit British Standard (includes mounting support)

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	AMD28741 BL	2CLA287410B1101			1
silver	–	AMD28741 PL	2CLA287410B1301			1
antrachite	–	AMD28741 AN	2CLA287410B1801			1
champagne	–	AMD28741 CV	2CLA287410B1901			1

RS/U 1.1

KNX sensor, 1/2 gang, 1M
Push switch function: switching, dimming, blind or scene.
Display elements: LED to indicate the function.
To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RS/U 1.1	2CSY244490R1012		0.11	1

RS/U 2.1

KNX sensor, 2/4 gang, 2M
Push switch function: switching, dimming, blind or scene.
Display elements: LED to indicate the function.
To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RS/U 2.1	2CSY247450R1003		0.12	1

RA/U 1.16.1

KNX sensor/switch actuator, 2/1 gang, 2M
Push switch function: switching, dimming, blind or scene.
Display elements: LED to indicate the function.
Outputs: 1x potential free contact.
Rated current: 16 A.
To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RA/U 1.16.1	2CSY249580R1103		0.12	1

RA/U 2.8.1

KNX sensor/switch actuator, 2/2 gang, 2M
Push switch function: switching, dimming, blind or scene.
Display elements: LED to indicate the function.
Outputs: 2x potential free contacts.
Rated current: 8 A.
To be installed with N2121, N2121.1, N2121.3, N2121.5, N2121.8, N2121.9 or N21 customized rockers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RA/U 2.8.1	2CSY242150R1106		0.12	1

ABB i-bus® KNX

User Operation – Design Ranges – Zenit

RB/U 1.1

KNX sensor/blind actuator, 1/1 gang, 2M
Push switch function: switching, dimming, blind or scene.
Display elements: LED to indicate the function.
Outputs: 1x change-over contacts/potential-bound
Rated current: 8 A.
To be installed with N2221, N2221.1, N2221.3, N2221.5, N2221.8, N2221.9 or N22 customized rockers.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	RB/U 1.1	2CSY247240R1105		0.12	1

N2121 BL

Rocker cover without symbol, 1M
Rocker cover without symbol for KNX sensor/actuator.
Suitable for codes: RS/U 1.1 and left and right positions of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121 BL	2CLA212100N1101			10
full white	–	N2121 BB	2CLA212100N1201			10
silver - chrome	–	N2121 PL	2CLA212100N1301			10
full anthracite	–	N2121 AA	2CLA212100N1601			10
anthracite - chrome	–	N2121 AN	2CLA212100N1801			10
champagne - chrome	–	N2121 CV	2CLA212100N1901			10

N2221 BL

Rocker cover without symbol, 2M
Rocker cover without symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221 BL	2CLA222100N1101			10
full white	–	N2221 BB	2CLA222100N1201			10
silver - chrome	–	N2221 PL	2CLA222100N1301			10
full anthracite	–	N2221 AA	2CLA222100N1601			10
anthracite - chrome	–	N2221 AN	2CLA222100N1801			10
champagne - chrome	–	N2221 CV	2CLA222100N1901			10

N2121.1 BL

Rocker cover with lamp symbol, 1M

Rocker cover without symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.1 BL	2CLA212110N1101			10
full white	–	N2121.1 BB	2CLA212110N1201			10
silver - chrome	–	N2121.1 PL	2CLA212110N1301			10
full anthracite	–	N2121.1 AA	2CLA212110N1601			10
anthracite - chrome	–	N2121.1 AN	2CLA212110N1801			10
champagne - chrome	–	N2121.1 CV	2CLA212110N1901			10

N2121.1R BL

Rocker cover with lamp symbol, Right, 1M

Rocker cover with lamp symbol for KNX sensor/actuator.
Suitable for codes: right position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.1R BL	2CLA212112N1101			10
full white	–	N2121.1R BB	2CLA212112N1201			10
silver - chrome	–	N2121.1R PL	2CLA212112N1301			10
full anthracite	–	N2121.1R AA	2CLA212112N1601			10
anthracite - chrome	–	N2121.1R AN	2CLA212112N1801			10
champagne - chrome	–	N2121.1R CV	2CLA212112N1901			10

N2221.1 BL

Rocker cover with lamp symbol, 2M

Rocker cover with lamp symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221.1 BL	2CLA222110N1101			10
full white	–	N2221.1 BB	2CLA222110N1201			10
silver - chrome	–	N2221.1 PL	2CLA222110N1301			10
full anthracite	–	N2221.1 AA	2CLA222110N1601			10
anthracite - chrome	–	N2221.1 AN	2CLA222110N1801			10
champagne - chrome	–	N2221.1 CV	2CLA222110N1901			10

ABB i-bus® KNX

User Operation – Design Ranges – Zenit

N2121.3 BL

Rocker cover with blind symbol, 1M
Rocker cover with blind symbol for KNX sensor/actuator.
Suitable for codes: RS/U 1.1 and left and right positions of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.3 BL	2CLA212130N1101			10
full white	–	N2121.3 BB	2CLA212130N1201			10
silver - chrome	–	N2121.3 PL	2CLA212130N1301			10
full anthracite	–	N2121.3 AA	2CLA212130N1601			10
anthracite - chrome	–	N2121.3 AN	2CLA212130N1801			10
champagne - chrome	–	N2121.3 CV	2CLA212130N1901			10

N2221.3 BL

Rocker cover with blind symbol, 2M
Rocker cover with blind symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221.3 BL	2CLA222130N1101			10
full white	–	N2221.3 BB	2CLA222130N1201			10
silver - chrome	–	N2221.3 PL	2CLA222130N1301			10
full anthracite	–	N2221.3 AA	2CLA222130N1601			10
anthracite - chrome	–	N2221.3 AN	2CLA222130N1801			10
champagne - chrome	–	N2221.3 CV	2CLA222130N1901			10

N2121.5 BL

Rocker cover with ON/OFF symbol, 1M
Rocker cover with ON/OFF symbol for KNX sensor/actuator.
Suitable for codes: RS/U 1.1 and left position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.5 BL	2CLA212150N1101			10
full white	–	N2121.5 BB	2CLA212150N1201			10
silver - chrome	–	N2121.5 PL	2CLA212150N1301			10
full anthracite	–	N2121.5 AA	2CLA212150N1601			10
anthracite - chrome	–	N2121.5 AN	2CLA212150N1801			10
champagne - chrome	–	N2121.5 CV	2CLA212150N1901			10

N2121.5R BL

Rocker cover with ON/OFF symbol, Right, 1M

Rocker cover with ON/OFF symbol for KNX sensor/actuator.
Suitable for codes: right position of RS/U 2.1, RA/U1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.5R BL	2CLA212152N1101			10
full white	–	N2121.5R BB	2CLA212152N1201			10
silver - chrome	–	N2121.5R PL	2CLA212152N1301			10
full anthracite	–	N2121.5R AA	2CLA212152N1601			10
anthracite - chrome	–	N2121.5R AN	2CLA212152N1801			10
champagne - chrome	–	N2121.5R CV	2CLA212152N1901			10

N2221.5 BL

Rocker cover with ON/OFF symbol, 2M

Rocker cover with ON/OFF symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221.5 BL	2CLA222150N1101			10
full white	–	N2221.5 BB	2CLA222150N1201			10
silver - chrome	–	N2221.5 PL	2CLA222150N1301			10
full anthracite	–	N2221.5 AA	2CLA222150N1601			10
anthracite - chrome	–	N2221.5 AN	2CLA222150N1801			10
champagne - chrome	–	N2221.5 CV	2CLA222150N1901			10

N2121.8 BL

Rocker cover with dimmer symbol, 1M

Rocker cover with dimmer symbol for KNX sensor/actuator.
Suitable for codes: RS/U 1.1 and left position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.8 BL	2CLA212180N1101			10
full white	–	N2121.8 BB	2CLA212180N1201			10
silver - chrome	–	N2121.8 PL	2CLA212180N1301			10
full anthracite	–	N2121.8 AA	2CLA212180N1601			10
anthracite - chrome	–	N2121.8 AN	2CLA212180N1801			10
champagne - chrome	–	N2121.8 CV	2CLA212180N1901			10

ABB i-bus® KNX

User Operation – Design Ranges – Zenit

N2121.8R BL

Rocker cover with dimmer symbol, Right, 1M
Rocker cover with dimmer symbol for KNX sensor/actuator.
Suitable for codes: right position of RS/U 2.1, RA/U1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.8R BL	2CLA212182N1101			10
full white	–	N2121.8R BB	2CLA212182N1201			10
silver - chrome	–	N2121.8R PL	2CLA212182N1301			10
full anthracite	–	N2121.8R AA	2CLA212182N1601			10
anthracite - chrome	–	N2121.8R AN	2CLA222180N1801			10
champagne - chrome	–	N2121.8R CV	2CLA222180N1901			10

N2221.8 BL

Rocker cover with dimmer symbol, 2M
Rocker cover with dimmer symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221.8 BL	2CLA222180N1101			10
full white	–	N2221.8 BB	2CLA222180N1201			10
silver - chrome	–	N2221.8 PL	2CLA222180N1301			10
full anthracite	–	N2221.8 AA	2CLA222180N1601			10
anthracite - chrome	–	N2221.8 AN	2CLA222180N1801			10
champagne - chrome	–	N2221.8 CV	2CLA222180N1901			10

N2121.9 BL

Rocker cover with scene symbol, 1M
Rocker cover with scene symbol for KNX sensor/actuator.
Suitable for codes: RS/U 1.1 and left position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.9 BL	2CLA212190N1101			10
full white	–	N2121.9 BB	2CLA212190N1201			10
silver - chrome	–	N2121.9 PL	2CLA212190N1301			10
full anthracite	–	N2121.9 AA	2CLA212190N1601			10
anthracite - chrome	–	N2121.9 AN	2CLA212190N1801			10
champagne - chrome	–	N2121.9 CV	2CLA212190N1901			10

N2121.9R BL

Rocker cover with scene symbol, Right, 1M

Rocker cover with scene symbol for KNX sensor/actuator.
Suitable for codes: right position of RS/U 2.1, RA/U 1.16.1 and RA/U/ 2.8.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2121.9R BL	2CLA212192N1101			10
full white	–	N2121.9R BB	2CLA212192N1201			10
silver - chrome	–	N2121.9R PL	2CLA212192N1301			10
full anthracite	–	N2121.9R AA	2CLA212192N1601			10
anthracite - chrome	–	N2121.9R AN	2CLA212192N1801			10
champagne - chrome	–	N2121.9R CV	2CLA212192N1901			10

N2221.9 BL

Rocker cover with scene symbol, 2M

Rocker cover with scene symbol for KNX sensor/actuator.
Suitable for codes: RB/U 1.1.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white - chrome	–	N2221.9 BL	2CLA222190N1101			10
full white	–	N2221.9 BB	2CLA222190N1201			10
silver - chrome	–	N2221.9 PL	2CLA222190N1301			10
full anthracite	–	N2221.9 AA	2CLA222190N1601			10
anthracite - chrome	–	N2221.9 AN	2CLA222190N1801			10
champagne - chrome	–	N2221.9 CV	2CLA222190N1901			10

RT/U 1.1.ZW

KNX thermostat, 2M

Standard KNX thermostat equipped with backlight LCD display 4 push buttons on the front for the following functionalities (Operating mode switching, Fan-coil speed manual switching, set-point manual increment/decrement).
Possibility to choose different type of control: 2-point ON/OFF, PWM, Continue, Fan- coil.
Cover plate included.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	RT/U 1.1.ZW	2CSY244280R1202		0.12	1
anthracite	–	RT/U 1.1.ZA	2CSY249370R1202		0.12	1
silver	–	RT/U 1.1.ZS	2CSY242280R1202		0.12	1
champagne	–	RT/U 1.1.ZC	2CSY247370R1202		0.12	1

ABB i-bus® KNX

User Operation – Design Ranges – Chiara

2CSKK1002C

Binary Input, 2-fold, with Rocker Switch

Device equipped with: 1 rocker switch; 2 binary input channels that can be used to interface to KNX system conventional push-buttons/rocker switches, or auxiliary/technical contacts. LEDs for the functional signaling of the load to which the rocker switch is connected. Flush-mounted installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
white	–	2CSKK1002C	2CSK206571R1002		0.12	1

2CSKK1003C

Binary Input, 2-fold, with Rocker Switches, 2 gang

Device equipped with: 2 rocker switches; 2 binary input channels that can be used to interface to KNX system conventional push-buttons/rocker switches, or auxiliary/technical contacts. LEDs for the functional signaling of the load to which the rocker switch is connected. Flush-mounted installation.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
white	–	2CSKK1003C	2CSK232195R1003			1

2CSKK1202C

Thermostat

Standard KNX thermostat equipped with backlight LCD display 4 push buttons on the front-for the following functionalities (Operating mode switching, Fan-coil speed manual switching, set-point manual increment/decrement). Possibility to choose different type of control: 2-point ON/OFF, PWM, Continue, Fan- coil.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	2CSKK1202C	2CSK232205R1202		0.07	1

2CSKK1504C

Set of 4 cover DND/MUR

Cover for Chiara KNX device 2CSKK1002C. With Do-Not-Disturb/Make-Up-Room symbols.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
white	–	2CSKK1504C	2CSK232155R1504			1

Notes

ABB CYLON®

Electrical installation solutions for buildings

ABB Cylon®

Index

System Architecture	2
ASPECT® Control Engines (ACE) & Supervisor	3
ABB Cylon® ASPECT® Engineering	6
ABB Cylon® ASPECT® License Upgrades	7
BACnet®/IP Main Plant Controllers	8
BACnet® Main Plant Controllers	9
FBXi / CBX Main Plant IO	10
BACnet®/IP Unitary Controllers	11
BACnet® Unitary Controllers	12
BACnet® Engineering Software	15
INTEGRA™ IT-8000 (EMEA & FE)	16
INTEGRA™ IT-8000 (NA)	19
INTEGRA™ IT-8000 Software Maintenance Agreements	22
INTEGRA-Supervisor (EMEA & FE)	23
INTEGRA-Supervisor (NA)	26
Unitron Main Plant Controllers	28
Unitron Unitary Controllers	28
Unitron Communications Controllers	29
Unitron Relays	29
Unitron Engineering Software	30
Unitron Supervision Software	31
Displays & Smart Sensors	32
Sensors - Wired	34
Demonstration & Technical Services	37
Other	38
Spares	39
Withdrawn Product/Spares	40

ABB Cylon®
System Architecture

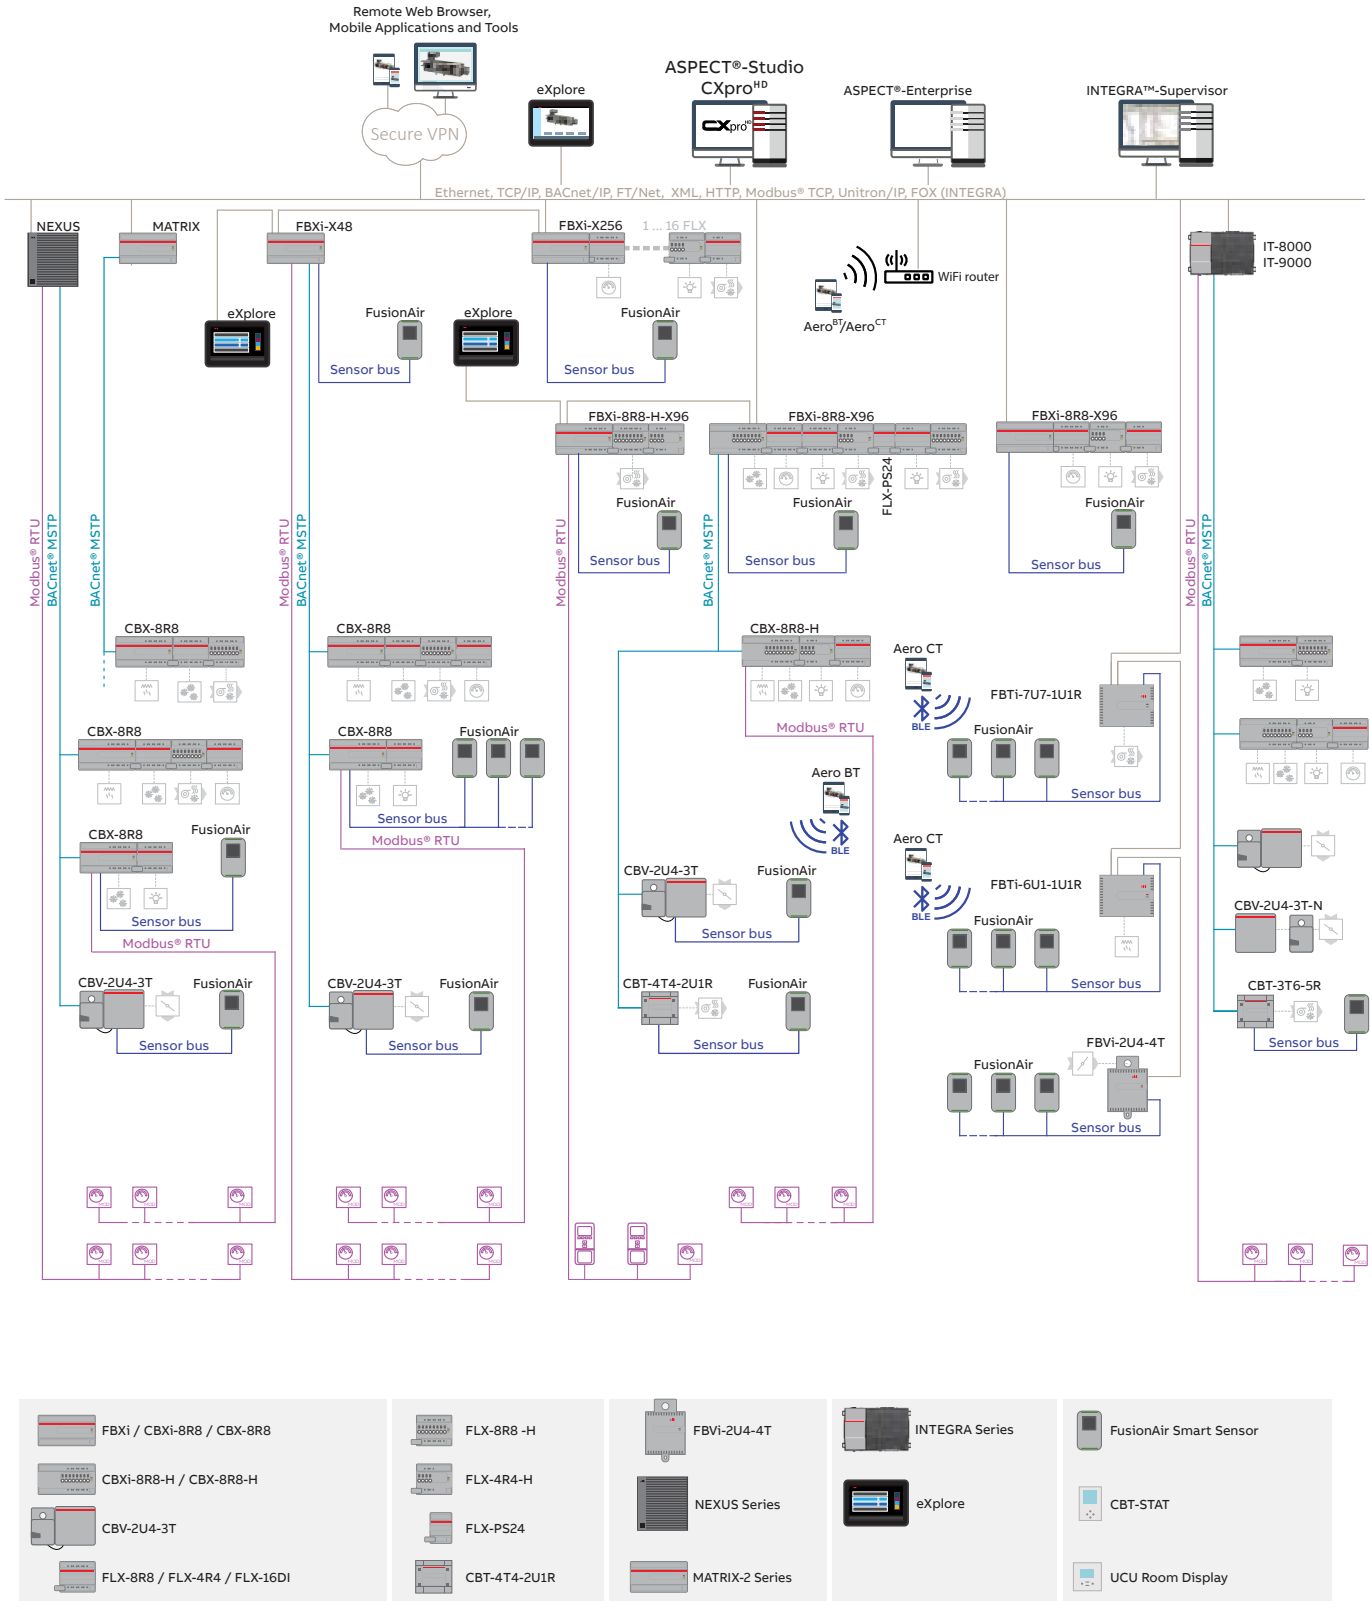

FBXi / CBXi-8R8 / CBX-8R8
CBXi-8R8-H / CBX-8R8-H
CBV-2U4-3T
FLX-8R8 / FLX-4R4 / FLX-16DI
FLX-8R8 -H
FLX-4R4-H
FLX-PS24
CBT-4T4-2U1R
FBVi-2U4-4T
NEXUS Series
MATRIX-2 Series
INTEGRA Series
eXplore
FusionAir Smart Sensor
CBT-STAT
UCU Room Display

ABB Cylon®

ASPECT® Control Engines (ACE) & Supervisor

MATRIX-2 Series

MATRIX-2 Series

Ideal for smaller facilities, the MATRIX-2 Series Control Engine is an embedded building automation network controller designed to provide flexible area control applications to a building energy management system. Interacts seamlessly with protocols such as BACnet MS/TP, Unitron, AAM PUP and Modbus.

Description	Order details	
	Type code	Order code
MATRIX-2 ACE (ASPECT Control Engine) with embedded ASPECT runtime engine and web UI, includes 2 EIA-485 ports, configurable for 9.6 to 115.2 kbps, capable of supporting a 1 device (either MS/TP or TCP/IP) or 750 points. Support for 2 RS-485 protocols (BACnet MS/TP, Modbus RTU, AAM PUP or Teletrol TSC), and a maximum of 64 MS/TP devices per port. One RJ-45 10/100 MB Ethernet port with TCP/IP support for FT/Net, BACnet/IP, Modbus TCP and Cylon UC32.netK. Field upgrade-able to support a maximum of 2,500 points and 128 devices as a combination of either TCP/IP or MS/TP connections.	MAT-11	2CQG100106R1021
MATRIX-2 ACE (ASPECT Control Engine) with embedded ASPECT runtime engine and web UI, includes 2 EIA-485 ports, configurable for 9.6 to 115.2 kbps, capable of supporting upto a total of 16 devices (either MS/TP or TCP/IP) or 750 points. Support for 2 RS-485 protocols (BACnet MS/TP, Modbus RTU, AAM PUP or Teletrol TSC), and a maximum of 64 MS/TP devices per port. One RJ-45 10/100 MB Ethernet port with TCP/IP support for FT/Net, BACnet/IP, Modbus TCP and Cylon UC32.netK. Field upgradeable to support a maximum of 2,500 points and 128 devices as a combination of either TCP/IP or MS/TP connections.	MAT-216	2CQG100102R1021
MATRIX-2 ACE (ASPECT Control Engine) with embedded ASPECT runtime engine and web UI, includes 2 EIA-485 ports, configurable for 9.6 to 115.2 kbps, capable of supporting upto a total of 32 devices (either MS/TP or TCP/IP) or 1,250 points. Support for 2 RS-485 protocols (BACnet MS/TP, Modbus RTU, AAM PUP or Teletrol TSC), and a maximum of 64 MS/TP devices per port. One RJ-45 10/100 MB Ethernet port with TCP/IP support for FT/Net, BACnet/IP, Modbus TCP and Cylon UC32.netK. Field upgradeable to support a maximum of 2,500 points and 128 devices as a combination of either TCP/IP or MS/TP connections.	MAT-232	2CQG100103R1021
MATRIX-2 ACE (ASPECT Control Engine) with embedded ASPECT runtime engine and web UI, includes 2 EIA-485 ports, configurable for 9.6 to 115.2 kbps, capable of supporting upto a total of 64 devices (either MS/TP or TCP/IP) or 1,750 points. Support for 2 RS-485 protocols (BACnet MS/TP, Modbus RTU, AAM PUP or Teletrol TSC), and a maximum of 64 MS/TP devices per port. One RJ-45 10/100 MB Ethernet port with TCP/IP support for FT/Net, BACnet/IP, Modbus TCP and Cylon UC32.netK. Field upgradeable to support a maximum of 2,500 points and 128 devices as a combination of either TCP/IP or MS/TP connections.	MAT-264	2CQG100104R1021
MATRIX-2 ACE (ASPECT Control Engine) with embedded ASPECT runtime engine and web UI, includes 2 EIA-485 ports, configurable for 9.6 to 115.2 kbps, capable of supporting upto a total of 96 devices (either MS/TP or TCP/IP) or 2,000 points. Support for 2 RS-485 protocols (BACnet MS/TP, Modbus RTU, AAM PUP or Teletrol TSC), and a maximum of 64 MS/TP devices per port. One RJ-45 10/100 MB Ethernet port with TCP/IP support for FT/Net, BACnet/IP, Modbus TCP and Cylon UC32.netK. Field upgradeable to support a maximum of 2,500 points and 128 devices as a combination of either TCP/IP or MS/TP connections.	MAT-296	2CQG100105R1021
License file to upgrade any MATRIX-2 ACE (ASPECT Control Engine). Adds support for an additional 8 devices or 250 points. Multiple MAT-LP-8 may be purchased to reach a maximum of 2,500 points and 128 devices as a combination of either TCP/IP or MS/TP connections.	MAT-LP-8	2CQG100101R1021
Charge for field upgrades or moving a licence to a different device when there is no associated hardware or software purchased.	MAT-LIC-CHG	2CQG103703S3021

ABB Cylon®

ASPECT® Control Engines (ACE) & Supervisor

NEXUS-3 Series

NEXUS-3 Series

The NEXUS-3 is an IoT (Internet of Things) embedded ASPECT® Control Engine designed to provide flexible site control applications for medium to large scale building automation systems.

Description	Order details	
	Type code	Order code
NEXUS ACE (ASPECT Control Engine) with embedded ASPECT runtime engine and web UI, includes 2 RS-485 ports, configurable for 9.6 to 115.2 kbps, capable of supporting up to a total of 64 devices (either MS/TP or TCP/IP) or 4,000 points. Support for 2 RS-485 protocols (BACnet MS/TP, Modbus RTU, or AAM PUP). One RJ-45 10/100/1000 MB Ethernet port with TCP/IP support for FT/Net, BACnet/IP, Modbus TCP and Cylon UC.32 Net. Field upgrade-able to support a maximum of 10,000 points and 128 devices as a combination of either TCP/IP or MS/TP connections.	NEXUS-3-264	2CQG100111R2021
NEXUS ACE (ASPECT Control Engine) with embedded ASPECT runtime engine and web UI, includes 2 RS-485 ports, configurable for 9.6 to 115.2 kbps, capable of supporting up to a total of 128 devices (either MS/TP or TCP/IP) or 8,000 points. Support for 2 RS-485 protocols (BACnet MS/TP, Modbus RTU, or AAM PUP). One RJ-45 10/100/1000 MB Ethernet port with TCP/IP support for FT/Net, BACnet/IP, Modbus TCP and Cylon UC.32 Net. Field upgrade-able to support a maximum of 10,000 points and 128 devices as a combination of either TCP/IP or MS/TP connections.	NEXUS-3-2128	2CQG100110R2021
License file to upgrade NEXUS-264 ACE (ASPECT Control Engine). Adds support for an additional 16 devices or 1,000 points. Multiple NEX-LP-16 may be purchased to reach a maximum of 10,000 points and 128 devices as a combination of either TCP/IP or MS/TP connections.	NEX-LP-16	2CQG100101R2021
Charge for field upgrades or moving a licence to a different device when there is no associated hardware or software purchased.	NEX-LIC-CHG	2CQG103702S3021

ABB Cylon®

ASPECT® Control Engines (ACE) & Supervisor

ASPECT-Enterprise

ASPECT-Enterprise

ASPECT-Enterprise is a server-based variant that provides all of the powerful features of ASPECT, but is installed on specified server hardware. As this solution is hosted by the end-user, it requires no proprietary hardware, but requires the purchase of ASPECT-Enterprise software. This allows the ease of on-site installations and fewer restrictions on requirements. In addition, it integrates with popular Internet programs to allow end- users more freedom. With ASPECT, your PC, tablet, or smart device can integrate with your building easily and efficiently.

Whether the platform is a server running VMware®, a standard server box or complex rack-mountable network appliance, ASPECT-Enterprise provides the capability, security, and the specification to meet the requirements of almost any project at an affordable price.

Description	Order details	
	Type code	Order code
ASPECT-Enterprise software with support for 2 FT/Net connections (ASPECT Control Engines) or 15,000 points. Runs on VMWare. Field upgrade-able to support a maximum of 256 TCP/IP connections or 100,000 points.	ASP-ENT-2	2CQG103202S3021
ASPECT-Enterprise software with support for 12 FT/Net connections (ASPECT Control Engines) or 25,000 points. Runs on VMWare. Field upgrade-able to support a maximum of 256 TCP/IP connections or 100,000 points.	ASP-ENT-12	2CQG103201S3021
ASPECT-Enterprise software with support for 96 FT/Net connections (ASPECT Control Engines) or 50,000 points. Runs on VMWare. Field upgrade-able to support a maximum of 256 TCP/IP connections or 100,000 points.	ASP-ENT-96	2CQG103204S3021
ASPECT-Enterprise software with support for 256 FT/Net connections (ASPECT Control Engines) or 100,000 points. Runs on VMWare. Field upgrade-able to support a maximum of 256 TCP/IP connections or 100,000 points.	ASP-ENT-256	2CQG103203S3021

ABB Cylon®
ASPECT® Engineering

ASPECT®-Studio

ASPECT-Studio

ASPECT-Studio provides a graphical programming tool experience like no other for configuring ASPECT applications. Acting as an integrated development environment for ASPECT products, ASPECT-Studio contains a complete library of logical and graphical “widgets” representing the common tools that are used to engineer sophisticated control strategies for a complete control system and graphical user interface solution.

Using this highly intuitive software environment, users create and define all necessary elements for a project – including network device and point programming, global control sequencing, historical trending, alarming, scheduling, as well as rich graphical user interface pages. Rapid engineering capabilities can be leveraged to minimize labor intensive steps. This includes mass editing options, import and export of networked devices and points, and the ability to create custom Device and Point templates.

As a project is created, you have the ability to evaluate your work through each step of the engineering phase using simulated data, as well as the ability to communicate with defined networks, devices and their associated points. Complete testing prior to the deployment of a project can also be performed using a local simulation of the ASPECT environment. At commissioning time, ASPECT-Studio reduces labor for technicians by automatically generating an HTML5 UI for all defined network devices, allowing smart phone and tablet users to gain access to the energy management system.

Description	Order details	
	Type code	Order code
ASPECT-Studio single user license (Software License Key). Download software from Cylon.	ASP-STU	2CQG103403S3021
Additional Software License Key for ASPECT-Studio. Download software from Cylon. Requires ASPECT-STUDIO.	ASP-STU-A	2CQG103404S3021
Renewal of an ASPECT-Studio licence, issued annually.	ASP-STU-AR	2CQG103407S3021
ASPECT-Studio Enduser Software License Key.	ASP-STU-EU	2CQG103401S3021
ASPECT-Studio Enduser Software License Key major release upgrade. Ie from ASPECT-Stuio v2.X to v3.X. Interim releases are free. Requires ASPECT-ENDUSER.	ASP-STU-EU-UPG	2CQG103402S3021

ABB Cylon®

ASPECT® License Upgrades

ASPECT®-Studio single user licence (Soft Licence)

ASPECT-Enterprise upgrades

Description	Order details	
	Type code	Order code
TCP Add License Pack. Adds support for 16 devices or 800 points of BACnet/IP or Modbus TCP to ASPECT-ENT-XXX.	ENT-TCP-16	2CQG103207S3021
TCP Add License Pack. Adds support for 32 devices or 1,600 points of BACnet/IP or Modbus TCP to ASPECT-ENT-XXX.	ENT-TCP-32	2CQG103209S3021
TCP Add License Pack. Adds support for 64 devices or 3,200 points of BACnet/IP or Modbus TCP to ASPECT-ENT-XXX.	ENT-TCP-64	2CQG103210S3021
TCP Add License Pack. Adds support for 128 devices or 6,400 points of BACnet/IP or Modbus TCP to ASPECT-ENT-XXX.	ENT-TCP-128	2CQG103206S3021
TCP Add License Pack. Adds support for 256 devices or 12,800 points of BACnet/IP or Modbus TCP to ASPECT-ENT-XXX.	ENT-TCP-256	2CQG103208S3021
Charge for Field License Upgrade/Change. Charged when license upgrade is not purchased at time of initial order. Used to move or change an existing license at the request of customer. Applies to all license changes for either MATRIX-2, NEXUS or ASPECT-Enterprise.	ENT-LIC-CHG	2CQG103701S3021
ASPECT-Enterprise license file to upgrade from ASPECT-ENT-12 (or lower) to ASPECT-ENT-96.	ENT-UP-96	2CQG103212S3021
ASPECT-Enterprise license file to upgrade from ASPECT-ENT-96 to ASPECT-ENT-256.	ENT-UP-256	2CQG103211S3021

ABB Cylon®

BACnet®/IP Main Plant Controllers

FBXi-8R8-(H)-X96

FBXi Series

The FBXi Series is a range of freely programmable BACnet Controllers with native BACnet/IP communications support. BTL listed (B-BC) with built in advanced cybersecurity technology and multi-protocol support, the FBXi series is ideally suited as integration platform for HVAC equipment and electrical systems including lighting control and metering applications.
With support for up to sixteen FLX (Field Level eXpansion) series extension modules equipped with UniPut technology and dedicated FusionAir Sensor port, the FBXi series provides power and flexibility for complex plant applications. Local override function through HOA switches is available on the -H variants.
For medium sized plants, the -8R8 variants feature built-in 8 UniPuts™ with Relay and 8 Universal Inputs.

Description	Order details	
	Type code	Order code
BACnet/IP B-BC programmable controller for control and monitoring of small plant or HVAC equipment. Includes support for 32 Modbus (TCP or RTU) devices or 320 Modbus Points.	FBXi-X48	2CQG201018R1021
BACnet/IP B-BC programmable controller for control and monitoring of small plant or HVAC equipment. Includes support for 32 Modbus (TCP or RTU) devices or 320 Modbus Points.	FBXi-X256	2CQG201014R1021
16 I/O Point (expandable using FLX modules to 96 I/O) BACnet/IP B-BC programmable controller for control and monitoring of small plant or HVAC equipment. Controller features 8 UniPuts™ with Relay outputs (software configurable for AI, AO, DI or DO-R (Relay)) and 8 UI. Includes support for 450 Modbus Points.	FBXi-8R8-X96	2CQG201028R1011
16 I/O Point (expandable using FLX modules to 96 I/O) BACnet/IP B-BC programmable controller with HOA switches and potentiometers for control and monitoring of small plant or HVAC equipment. Controller features 8 UniPuts™ with Relay outputs (software configurable for AI, AO, DI or DO-R (Relay)) and 8 UI. Includes support 450 Modbus Points.	FBXi-8R8-H-X96	2CQG201029R1011

FBTi-6-7T7-1U1R

FBTi Series

The FBTi Series is a family of BACnet Unitary Controller with native BACnet/IP communications support. BTL listed as BACnet Building Controller (B-BC), they perfectly complement the FBVi (IP VAV controller) in the IP terminal unit controller range. Utilizing the patented UniPut technology, it provides reliable and cost effective control solutions for Fan Coil Units, Chilled Ceilings, Heat Pumps and Roof Top Units.
Dual IP ports with failsafe switchover connects the FBTi to any open BACnet network and also provides seamless integration to the ABB Cylon® system.

FBTi-6T1-1U1R

Description	Order details	
	Type code	Order code
16-Point BACnet IP/B-BC programmable controller for terminal applications such as heat pumps, roof top units, fan coils, chilled ceilings, and small air handling units. Controller features 7 UniPuts™ with triac outputs (software configured for AI, AO, DI or DO-T (Triac), 1 UniPut™ without triac output, 7 UI and 1 Digital (Relay) Output. Freely programmable.	FBTi-7T7-1U1R	2CQG201022R1011
9-Point BACnet IP/B-BC programmable controller for terminal applications such as fan coils, chilled ceilings and unit ventilation. Controller features 6 UniPuts™ with triac outputs (software configured for AI, AO, DI or DO-T (Triac), 1 UniPut™ without triac output, 1 UI and 1 Digital (Relay) Output. Freely programmable.	FBTi-6T1-1U1R	2CQG201023R1011

ABB Cylon®

BACnet® Main Plant Controllers

CBX Series

CBX Series

The CBX Series is a freely programmable range of BACnet® Controllers with native MS/TP communications support. The controllers are BTL listed BACnet Advanced Application Controller (B-AAC) and are ideally suited for a wide range of applications for intelligent control of HVAC equipment, and electrical systems including lighting control and metering applications. The CBX-8R8 and CBX-8R8-H controllers support multi-protocol communications simultaneously including BACnet MS/TP and Modbus® RTU.
Part of Cylon's CB Line of BACnet field controllers, the CBX-8R8 controller features 8 UniPuts™ with Relay, 8 Universal Inputs, as well as support for up to three FLX (Field Level eXpansion) series extension modules providing up to 64 points of control, and a dedicated input for Cylon's CBT-STAT or UCU Room Display intelligent room sensors. The -H variant provides local override function through HOA switches. FLX I/O expansion modules are available in a variety of options to allow maximum flexibility in achieving the required point configuration.

Description	Order details	
	Type code	Order code
16- Point BACnet® B-AAC programmable controller for control and monitoring of HVAC equipment and plants. Controller features 8 UniPuts™ with Relay outputs (software configurable for AI, AO, DI or DO-R (Relay) and 8 UI. Includes support for 4 Modbus® RTU devices or 40 points.	CBX-8R8	2CQG201003R1021
16- Point BACnet® B-AAC programmable controller with HOA switches and potentiometers for control and monitoring of HVAC equipment and plants. Controller features 8 UniPuts™ with Relay outputs (software configurable for AI, AO, DI or DO-R (Relay) and 8 UI. Includes support for 4 Modbus® RTU devices or 40 points.	CBX-8R8-H	2CQG201004R1021

ABB Cylon®

FLX Modules for FBXi and CBX Controllers

FLX

Field Level eXpansion (FLX) modules

The FLX (Field Level eXpansion) series of expansion modules are part of the FBXi and CBX controllers, delivering field expansion of up to 64 points of control.

Replace or Extend I/O Points Quickly and Easily FLX modules snap together without the need for the System Integrator to prepare special cabling, however, when necessary, a cable (FLX-RMC) can be used to extend the FLX modules' range to a total distance of 100 feet (30 meters) from the CBX controller.

Reduce Time On-Site Pre-configuration of FLX expansion modules via the FLX dip switch addressing facility; reduces on-site installation time, simplifies setup and system checks, and reduces the skill level requirement for a hardware upgrade or expansion.

Description	Order details	
	Type code	Order code
8-Point Field Level eXpansion (FLX) I/O module for CBX. Module features 4 UniPuts™ with Relay outputs and 4 UI. A maximum of three FLX modules may be added to a single CBX.	FLX-4R4	2CQG200704R1021
8-Point Field Level eXpansion (FLX) I/O module with HOA switches and potentiometers for CBX. Module features 4 UniPuts™ with Relay outputs and 4 UI. A maximum of three FLX modules may be added to a single CBX.	FLX-4R4-H	2CQG200705R1021
16-Point Field Level eXpansion (FLX) I/O module for CBX. Module features 8 UniPutsTM with Relay outputs (software configurable for AI, AO, DI or DO-R (Relay)) and 8 UI. A maximum of three FLX modules may be added to a single CBX.	FLX-8R8	2CQG200706R1021
16-Point Field Level eXpansion (FLX) I/O module with HOA switches and potentiometers for CBX-8R8. Module features 8 UniPutsTM with Relay outputs (software configurable for AI, AO, DI or DO-R (Relay)) and 8 UI. A maximum of three FLX modules may be added to a single CBX-8R8.	FLX-8R8-H	2CQG200707R1021
16-Point Field Level eXpansion (FLX) I/O module for CBX. Module features 16 Digital Inputs. A maximum of three FLX modules may be added to a single CBX.	FLX-16DI	2CQG200703R1021
Remote Mounting Connectors (Pair) For FLX I/O Modules.	FLX-RMC	2CQG205801R1021
20 V DC Power supply module for FLX Field Level eXpansion IO modules and external field devices (using the FLX-RMC).	FLX-PS24	2CQG205601R1021
9 pin interconnect replacement for FLX bus connection.	FLX-BUS-INT	2CQG206001R1021
9 pin end of line FLX bus termination replacement.	FLX-BUS-TERM	2CQG206002R1021

ABB Cylon®

BACnet®/IP Unitary Controllers

FBVi-2U4-4T

FBVi-2U4-4T

The FBVi-2U4-4T is a freely programmable BACnet Unitary Controller with native BACnet/IP communications support. The controller is BTL listed as BACnet Building Controller (B-BC) and is ideally suited for the control of Variable Air Volume zoning applications.

Part of the FLXeon Series of BACnet/IP field controllers, the FBVi-2U4-4T features 2 UniPuts™, 4 Universal Inputs and 4 Digital (Triac) Outputs, along with an integrated airflow sensor and a dedicated input for Cylon® room sensors. The FBVi-2U4-4T model includes an integrated Belimo actuator.

Description	Order details	
	Type code	Order code
10-Point BACnet/IP B-BC programmable VAV controller for control and monitoring of small plant or HVAC equipment. Controller features 2 UniPuts™ (software configurable for AI, AO, DI or DO-R (Relay)) 4 DO and 4 UI. Preloaded Strategy with Imperial units.	FBVi-2U4-4T-IMP	2CQG201015R1021
10-Point BACnet/IP B-BC programmable VAV controller for control and monitoring of small plant or HVAC equipment. Controller features 2 UniPuts™ (software configurable for AI, AO, DI or DO-R (Relay)) 4 DO and 4 UI. Preloaded Strategy with Metric units.	FBVi-2U4-4T-SI	2CQG201016R1021
10-Point BACnet/IP B-BC programmable VAV controller for control and monitoring of small plant or HVAC equipment. Controller features 2 UniPuts™ (software configurable for AI, AO, DI or DO-R (Relay)) 4 DO and 4 UI. Preloaded Strategy with Imperial units and FusionAir support.	FBVi-2U4-4T-FAIMP	2CQG201020R1011
10-Point BACnet/IP B-BC programmable VAV controller for control and monitoring of small plant or HVAC equipment. Controller features 2 UniPuts™ (software configurable for AI, AO, DI or DO-R (Relay)) 4 DO and 4 UI. Preloaded Strategy with Metric units and FusionAir support.	FBVi-2U4-4T-FA-SI	2CQG201021R1011

ABB Cylon®

BACnet® Unitary Controllers

CBT-4T4-2U1R

CBT-4T4-2U1R

11-point BACnet B-AAC programmable controller for terminal applications such as fan coil units with EC motors, heat pumps, unit ventilators and chilled ceilings.
Controller features 4 UniPuts™ with Triac outputs (software configured for AI, AO, DI or DO-T (Triac), 4 UI, 2 Uniputs and 1 x 8A mains rated Digital (high in-rush current relay) Output.
Freely programmable, no pre-loaded strategy.

Description	Order details	
	Type code	Order code
11-Point BACnet B-AAC programmable controller for terminal applications such as fan coil units with ECM, heat pumps, unit vents, chilled ceilings, and miscellaenous points. Controller features 4 UniPutsTM with Triac outputs (software configured for AI, AO, DI or DO-T (Triac), 4 UI and 2 UniPuts and 1 X 8A mains Relay Digital Output. Freely programmable.	CBT-4T4-2U1R	2CQG201308R1021

ABB Cylon®

BACnet® Unitary Controllers

CBT-3T6-5R

CBT-3T6-5R

The CBT-3T6-5R is a freely programmable BACnet Unitary Controller with native MS/TP communications support. The controller is BTL listed as a BACnet Advanced Application Controller (B-AAC) and is ideally suited for Rooftop HVAC units, Fan Coil Units, Heat Pumps, Unit Ventilators, and custom unitary equipment control.
Part of Cylon's CB Line of BACnet field controllers, the CBT-3T6-5R provides 3 UniPuts™ with Triac (configurable as inputs or outputs), 6 Universal Inputs, 5 Digital (Relay) Outputs and a dedicated input for Cylon's CBT-STAT or UCU Room Display intelligent room sensors.

Description	Order details	
	Type code	Order code
14-Point BACnet B-AAC programmable controller for terminal applications such as heat pump, roof top unit, fan coil, chilled ceiling, and small air handling units. Controller features 3 UniPuts™ with Triac outputs (software configured for AI, AO, DI or DO-T (Triac), 6 UI and 5 Digital (Relay) Outputs. Freely programmable, no pre-loaded strategy.	CBT-3T6-5R	2CQG201309R1021
14-Point BACnet B-AAC programmable controller for terminal applications such as heat pump, roof top unit, fan coil, chilled ceiling, and small air handling units. Controller features 3 UniPuts™ with Triac outputs (software configured for AI, AO, DI or DO-T (Triac), 6 UI and 5 Digital (Relay) Outputs. Freely programmable with preloaded Heat-Pump strategy (Imperial units).	CBT-3T6-5R-HP-IMP	2CQG201302R1021
14-Point BACnet B-AAC programmable controller for terminal applications such as heat pump, roof top unit, fan coil, chilled ceiling, and small air handling units. Controller features 3 UniPuts™ with Triac outputs (software configured for AI, AO, DI or DO-T (Triac), 6 UI and 5 Digital (Relay) Outputs. Freely programmable with preloaded Heat-Pump strategy (SI units).	CBT-3T6-5R-HP-SI	2CQG201303R1021
14-Point BACnet B-AAC programmable controller for terminal applications such as heat pump, roof top unit, fan coil, chilled ceiling, and small air handling units. Controller features 3 UniPuts™ with Triac outputs (software configured for AI, AO, DI or DO-T (Triac), 6 UI and 5 Digital (Relay) Outputs. Freely programmable with preloaded RTU strategy (Imperial units).	CBT-3T6-5R-RTU-IMP	2CQG201304R1021
14-Point BACnet B-AAC programmable controller for terminal applications such as heat pump, roof top unit, fan coil, chilled ceiling, and small air handling units. Controller features 3 UniPuts™ with Triac outputs (software configured for AI, AO, DI or DO-T (Triac), 6 UI and 5 Digital (Relay) Outputs. Freely programmable with preloaded RTU strategy (SI units).	CBT-3T6-5R-RTU-SI	2CQG201305R1021
14-Point BACnet B-AAC programmable controller for terminal applications such as heat pump, roof top unit, fan coil, chilled ceiling, and small air handling units. Controller features 3 UniPuts™ with Triac outputs (software configured for AI, AO, DI or DO-T (Triac), 6 UI and 5 Digital (Relay) Outputs. Freely programmable with preloaded Heat-Pump strategy (Imperial units) and FusionAir support.	CBT-3T6-5R-FA-HP-IMP	2CQG201312R1011
14-Point BACnet B-AAC programmable controller for terminal applications such as heat pump, roof top unit, fan coil, chilled ceiling, and small air handling units. Controller features 3 UniPuts™ with Triac outputs (software configured for AI, AO, DI or DO-T (Triac), 6 UI and 5 Digital (Relay) Outputs. Freely programmable with preloaded Heat-Pump strategy (SI units) and FusionAir support.	CBT-3T6-5R-FA-HP-SI	2CQG201313R1011
14-Point BACnet B-AAC programmable controller for terminal applications such as heat pump, roof top unit, fan coil, chilled ceiling, and small air handling units. Controller features 3 UniPuts™ with Triac outputs (software configured for AI, AO, DI or DO-T (Triac), 6 UI and 5 Digital (Relay) Outputs. Freely programmable with preloaded RTU strategy (Imperial units) and FusionAir support.	CBT-3T6-5R-FA-RTU-IMP	2CQG201314R1011
14-Point BACnet B-AAC programmable controller for terminal applications such as heat pump, roof top unit, fan coil, chilled ceiling, and small air handling units. Controller features 3 UniPuts™ with Triac outputs (software configured for AI, AO, DI or DO-T (Triac), 6 UI and 5 Digital (Relay) Outputs. Freely programmable with preloaded RTU strategy (SI units) and FusionAir support.	CBT-3T6-5R-FA-RTU-SI	2CQG201315R1011

ABB Cylon®

BACnet® Unitary Controllers

CBV Series

CBV Series

The CBV Series is a freely programmable range of BACnet Unitary Controllers with native MS/TP communications support. The controllers are BTL listed as BACnet Advanced Application Controllers (B-AAC) and are ideally suited for the control of Variable Air Volume zoning applications.

Part of Cylon's CB Line of BACnet field controllers, the CBV Series features 2 UniPuts™, 4 Universal Inputs and 3 Digital (Triac) Outputs, along with an integrated airflow sensor and a dedicated input for Cylon's CBT-STAT or UCU Room Display intelligent room sensors. The CBT-2U4-3T model includes an integrated Belimo actuator. The -N variant has a facility for connection to an external actuator.

Description	Order details	
	Type code	Order code
BACnet B-AAC single-duct VAV terminal unit controller with integrated actuator. Controller features 2 UniPutsTM (software configured for AI, AO, DI or DO), 4 UI and 3 DO (Triac). Built-in differential pressure transducer (0-1.3"w.c., 0-320Pa) and actuator (45in-lb, 5Nm). Freely programmable, c/w pre-loaded factory configuration strategy with imperial units (degF).	CBV-2U4-3T-IMP	2CQG201510R0021
BACnet B-AAC single-duct VAV terminal unit controller without actuator. Controller features 2 UniPutsTM (software configured for AI, AO, DI or DO), 4 UI and 3 DO (Triac). Built-in differential pressure transducer (0-1.3"w.c., 0-320Pa). Freely programmable, c/w pre-loaded factory configuration strategy with imperial units (degF).	CBV-2U4-3T-N-IMP	2CQG201511R0021
BACnet B-AAC single-duct VAV terminal unit controller with integrated actuator. Controller features 2 UniPutsTM (software configured for AI, AO, DI or DO), 4 UI and 3 DO (Triac). Built-in differential pressure transducer (0-1.3"w.c., 0-320Pa) and actuator (45in-lb, 5Nm). Freely programmable, c/w pre-loaded factory configuration strategy with SI units (degC).	CBV-2U4-3T-SI	2CQG201513R0021
BACnet B-AAC single-duct VAV terminal unit controller without actuator. Controller features 2 UniPutsTM (software configured for AI, AO, DI or DO), 4 UI and 3 DO (Triac). Built-in differential pressure transducer (0-1.3"w.c., 0-320Pa). Freely programmable, c/w pre-loaded factory configuration strategy with SI units (degC).	CBV-2U4-3T-N-SI	2CQG201512R0021
BACnet B-AAC single-duct VAV terminal unit controller with integrated actuator. Controller features 2 UniPutsTM (software configured for AI, AO, DI or DO), 4 UI and 3 DO (Triac). Built-in differential pressure transducer (0-1.3"w.c., 0...320 Pa) and actuator (45in-lb, 5 Nm). Freely programmable, c/w pre-loaded factory configuration strategy with imperial units (degF) and FusionAir support.	CBV-2U4-3T-FA-IMP	2CQG201515R1011
BACnet B-AAC single-duct VAV terminal unit controller with integrated actuator. Controller features 2 UniPutsTM (software configured for AI, AO, DI or DO), 4 UI and 3 DO (Triac). Built-in differential pressure transducer (0-1.3"w.c., 0-320Pa) and actuator (45in-lb, 5Nm). Freely programmable, c/w pre-loaded factory configuration strategy with SI units (degC) and Fusion Air support.	CBV-2U4-3T-FA-SI	2CQG201518R1011
BACnet B-AAC single-duct VAV terminal unit controller without actuator. Controller features 2 UniPutsTM (software configured for AI, AO, DI or DO), 4 UI and 3 DO (Triac). Built-in differential pressure transducer (0-1.3"w.c., 0...320 Pa). Freely programmable, c/w pre-loaded factory configuration strategy with imperial units (degF) and FusionAir support.	CBV-2U4-3T-N-FA-IMP	2CQG201516R1011
BACnet B-AAC single-duct VAV terminal unit controller without actuator. Controller features 2 UniPutsTM (software configured for AI, AO, DI or DO), 4 UI and 3 DO (Triac). Built-in differential pressure transducer (0-1.3"w.c., 0...320 Pa). Freely programmable, c/w pre-loaded factory configuration strategy with SI units (degC) and FusionAir support.	CBV-2U4-3T-N-FA-SI	2CQG201517R1011

ABB Cylon®

BACnet® Engineering Software

CXpro[HD]

CXpro[HD]

CXpro[HD] provides all tools for integratores to quickly develop operational strategies for the ABB Cylon® CB Line of BACnet controllers and allows sites to be designed, configured, tested, engineered, commissioned and maintained.

Description	Order details	
	Type code	Order code
Downloadable software with Software License Key. Software application provides all tools for Integrators to quickly develop operational strategies for the ABB Cylon CB Line of BACnet controllers and allows sites to be designed, configured, tested, engineered, commissioned and maintained.	CXP-SI	2CQG203402S3021
Additional Software License Key. Requires CXpro[HD]-SI. Software application provides all tools for Integrators to quickly develop operational strategies for the ABB Cylon CB Line of BACnet controllers and allows sites to be designed, configured, tested, engineered, commissioned and maintained.Software application provides all tools for Integrators to quickly develop operational strategies for the ABB Cylon CB Line of BACnet controllers and allows sites to be designed, configured, tested, engineered, commissioned and maintained.	CXP-SI-A	2CQG203403S3021

Cylon

Cylon Engineering Centre

CEC BACnet® provides all tools for engineering legacy Cylon BACnet® sites, and Unitron sites.

Description	Order details	
	Type code	Order code
Cylon Engineering Centre Programming software licence for BACnet Systems.	CEC-BAC	2CQG203406S3021
Additional licence for use of the Cylon Engineering Centre programming software. Only available once 1M4UC130 has been purchased.	CEC-BAC-ADD	2CQG203407S3021

ABB Cylon®
INTEGRA™ IT-8000 (EMEA & FE)

INTEGRA™ IT-8000 (EMEA & FE)

Part of the INTEGRA™ family, the IT-8000 is an embedded Internet of Things (IoT), BTL-listed BACnet® Building Controller (B-BC) that connects to ABB's Cylon BACnet field controllers. The IT-8000 is also capable of connection to and network management of a variety of diverse devices and subsystems using various protocols including, but not limited to, Modbus™ and LonWorks™.
When connected to an Ethernet or wireless LAN, the IT-8000 uses Internet connectivity and web-serving capability to provide integrated control, supervision, network management, scheduling, data logging, alarming, and rich graphical displays through a standard Web browser.

Description	Order details	
	Type code	Order code
Bundled IT-8000 with America WLAN Country Code WiFi enabled. Includes core license for 250 points. Made up of IT-8000-WIFI + IT8-005-COR-E + IT8-005-SM0.	IT-8005-USWIFI-E	2CQG150114R4011
Bundled IT-8000 with Worldwide WLAN Code WiFi enabled. Includes core license for 250 points. Made up of IT-8000-WIFI + IT8-005-COR-E + IT8-005-SM0.	IT-8005-WWWIFI-E	2CQG150115R4011
Bundled IT-8000 with America WLAN Country Code WiFi enabled. Includes core license for 500 points. Made up of IT-8000-WIFI + IT8-010-COR-E + IT8-010-SM0.	IT-8010-USWIFI-E	2CQG150116R4011
Bundled IT-8000 with Worldwide WLAN Code WiFi enabled. Includes core license for 500 points. Made up of IT-8000-WIFI + IT8-010-COR-E + IT8-010-SM0.	IT-8010-WWWIFI-E	2CQG150117R4011
Bundled IT-8000 with America WLAN Country Code WiFi enabled. Includes includes core license for 1250 points. Made up of IT-8000-WIFI + IT8-025-COR-E + IT8-025-SM0.	IT-8025-USWIFI-E	2CQG150118R4011
Bundled IT-8000 with Worldwide WLAN Code WiFi enabled. Includes includes core license for 1250 points. Made up of IT-8000-WIFI + IT8-025-COR-E + IT8-025-SM0.	IT-8025-WWWIFI-E	2CQG150119R4011
Bundled IT-8000 with America WLAN Country Code WiFi enabled. Includes core license for 5000 points. Made up of IT-8000-WIFI + IT8-100-COR-E + IT8-100-SM0.	IT-8100-USWIFI-E	2CQG150120R4011
Bundled IT-8000 with Worldwide WLAN Code WiFi enabled. Includes core license for 5000 points. Made up of IT-8000-WIFI + IT8-100-COR-E + IT8-100-SM0.	IT-8100-WWWIFI-E	2CQG150121R4011
Bundled IT-8000 with America WLAN Country Code WiFi enabled. Includes core license for 10000 points. Made up of IT-8000-WIFI + IT8-200-COR-E + IT8-200-SM0.	IT-8200-USWIFI-E	2CQG150122R4011
Bundled IT-8000 with Worldwide WLAN Code WiFi enabled. Includes core license for 10000 points. Made up of IT-8000-WIFI + IT8-200-COR-E + IT8-200-SM0.	IT-8200-WWWIFI-E	2CQG150123R4011
IT-8000 initial device capacity pack license. Purchased at time of initial order with core software. Adds support for an additiona 500 points to the core (IT8-XXX-COR).	IT8-010-DCP-E	2CQG150123S4061
IT-8000 device capacity upgrade license. Purchased any time after initial core software purchase. Adds support for an additional 500 points to the core (IT8-XXX-COR-E).	IT8-010-DCU-E	2CQG150124S4061
Annual support fee and renewal of Demo equipment and Workbench licences. The fee for this part includes the annual fee for the Self-Licensing Extension Service and Marketplace Prime package. All rights to the Marketplace package are conditioned on agreement to the Niagara Marketplace Terms and Conditions of Use.	IT8-DEMO-SUP-R-E	2CQG150125R4011
Bundled IT-8000 with WiFi DISABLED. Includes core license for 250 points. Made up of IT-8000-NOWIFI + IT8-005-COR-E + IT8-005-SM0.	IT-8005-NOWIFI-E	2CQG150126R4011

ABB Cylon®
INTEGRA™ IT-8000 (EMEA & FE)

INTEGRA™ IT-8000 (EMEA & FE)

Description	Order details	
	Type code	Order code
IT-8000 initial device capacity pack license. Purchased at time of initial order with core software. Adds support for an additional 1,250 points to the core (IT8-XXX-COR-E).	IT8-025-DCP-E	2CQG150126S4061
Bundled IT-8000 with WiFi DISABLED. Includes core license for 500 points. Made up of IT-8000-NOWIFI + IT8-010-COR-E + IT8-010-SM0.	IT-8010-NOWIFI-E	2CQG150127R4011
IT-8000 field capacity upgrade license. Purchased any time after initial core software purchase. Adds support for an additional 1,250 points to the core (IT8-XXX-COR-E).	IT8-025-DCU-E	2CQG150127S4061
Bundled IT-8000 with WiFi DISABLED. Includes core license for 1250 points. Made up of IT-8000-NOWIFI + IT8-025-COR-E + IT8-025-SM0.	IT-8025-NOWIFI-E	2CQG150128R4011
IT-8000 initial device capacity pack license. Purchased at time of initial order with core software. Adds support for an additional 2,500 points to the core (IT8-XXX-COR).	IT8-050-DCP-E	2CQG150128S4061
Bundled IT-8000 with WiFi DISABLED. Includes core license for 5000 points. Made up of IT-8000-NOWIFI + IT8-100-COR-E + IT8-100-SM0.	IT-8100-NOWIFI-E	2CQG150129R4011
IT-8000 field capacity upgrade license. Purchased any time after initial core software purchase. Adds support for an additional 2,500 points to the core (IT8-XXX-COR-E).	IT8-050-DCU-E	2CQG150129S4061
Bundled IT-8000 with WiFi DISABLED. Includes core license for 10000 points. Made up of IT-8000-NOWIFI + IT8-200-COR-E + IT8-200-SM0.	IT-8200-NOWIFI-E	2CQG150130R4011
IT-8000 driver for Andover Controls AC256 over RS-232 or RS-485. (Beta version only).	IT8-DR-AC	2CQG150301S4061
IT-8000 driver for American Auto-Matrix PHP over RS-232 or RS-485. Manufactured by 3rd party. Limited support.	IT8-DR-APHP	2CQG150303S4061
IT-8000 driver for American Auto-Matrix PUP over RS-232 or RS-485. Manufactured by 3rd party. Limited support.	IT8-DR-APUP	2CQG150304S4061
DEMO VERSION of INTEGRA IT-8000 controller includes 2 EIA-485 ports, configurable for 9.6 to 115.2 kbps. Support for 2 RS-485 protocols (BACnet MS/TP, LON, Modbus RTU, AAM PUP). Two RJ-45 10/100 MB Ethernet with TCP/IP support for FOX, BACnet/IP, and Modbus TCP. WiFi connectivity 802.11 a/b/g/n. Web Interface, embedded Workbench, integrated power supply and USB backup and restore. Includes core DEMO license file with support of up to 500 devices or 25,000 points and all standard drivers.	IT8-DEMO-E	2CQG150124R4011
IT-8000 JSON Toolkit. Requires IT-8000 and valid Software Maintenance agreement.	IT8-DR-JSON	2CQG150311S4061
Provides FIPS 140-2 Level 1 conformance using the integrated FIPS certified BouncyCastle module for IT-8000. Requires IT-8000 version 4.6 and later.	IT8-FIPS	2CQG150315S4061
IT-8000 add-on single port LON FTT10A module.	IT8-NPB-LON	2CQG155803P2061
IT-8000 single port RS-232 module. Add-on providing one RS-232 port.	IT8-NPB-232	2CQG155805P2061
IT-8000 dual port RS-485 module. Add-on providing two RS-485 ports.	IT8-NPB-2X-485	2CQG155804P2061
IT-8000 SMS Alarm driver. Enables SMS alarms to be sent to any mobile phone via a GSM/GPRS modem connected to the RS-232 serial port driver. Supported in AX version 3.8U1 only. Not Available for N4.	IT8-DR-SMSALM	2CQG150317S4061

ABB Cylon®
INTEGRA™ IT-8000 (EMEA & FE)

INTEGRA™ IT-8000 (EMEA & FE)

Description	Order details	
	Type code	Order code
IT-8000 wall plug module. 100...240 V AC, 50/60 Hz. Connect to the 2.5 mm barrel plug, 24 V input to the IT-8000 and includes, US, EU, UK and AU plugs.	IT8-WPM	2CQG155806P2061
IT-8000 extension cable and bracket for WLAN antenna.	IT8-WIFI-EXT	2CQG155808P2061
IT-8000 driver for Carrier Comfort Network.	IT8-DR-CCN	2CQG150305S4061
IT-8000 driver for Flex over RS-232 or RS-485.	IT8-DR-FLEX	2CQG150306S4061
IT-8000 JSON Toolkit. Requires IT-8000 and valid Software Maintenance agreement.	IT8-DR-JSON	2CQG150311S4061
IT-8000 JSON Toolkit. Requires IT-8000 and valid Software Maintenance agreement.	IT8-DR-JSON	2CQG150311S4061
IT-8000 driver for McQuay to OPM driver. For use with IT-8000 hardware.	IT8-DR-MCQUAY	2CQG150312S4061
IT-8000 driver for Micros Fidelio IP driver.	IT8-DR-MFID	2CQG150313S4061
Provides FIPS 140-2 Level 1 conformance using the integrated FIPS certified BouncyCastle module for IT-8000. Requires IT-8000 version 4.6 and later.	IT8-FIPS	2CQG150315S4061
IT-8000 initial device capacity pack license. Purchased at time of initial order with core software. Adds support for an additional 5 devices or 250 points to the core (IT8-XXX-COR).	IT8-005-DCP	2CQG150108S4061
IT-8000 driver for Andover Controls Infinity.	IT8-DR-AINF	2CQG150302S4061

ABB Cylon®
INTEGRA™ IT-8000 (NA)

INTEGRA™ IT-8000 (NA)

Part of the INTEGRA™ family, the IT-8000 is an embedded Internet of Things (IoT), BTL-listed BACnet® Building Controller (B-BC) that connects to ABB Cylon® BACnet field controllers. The IT-8000 is also capable of connection to and network management of a variety of diverse devices and subsystems using various protocols including, but not limited to, Modbus™ and LonWorks™. When connected to an Ethernet or wireless LAN, the IT-8000 uses Internet connectivity and web-serving capability to provide integrated control, supervision, network management, scheduling, data logging, alarming, and rich graphical displays through a standard Web browser.

Description	Order details	
	Type code	Order code
Single port RS-232 add-on module for use with IT-8000 hardware.	IT8-NPB-232	2CQG150201R2011
Dual port RS-485 add-on module for use with IT-8000 hardware.	IT8-NPB-2X-485	2CQG150202R2011
IT-8000 add-on single port LON FTT10A module.	IT8-NPB-LON	2CQG150203R2011
IT-8000 extension cable and bracket for WLAN antenna.	IT8-WIFI-EXT	2CQG150204R2011
IT-8000 wall plug module. 100-240 VAC, 50/60 Hz. Connect to the 2.5 mm barrel plug, 24 V input to the IT-8000 and includes, US, EU, UK and AU plugs.	IT8-WPM	2CQG150205R2011
INTEGRA™-N4 network controller with embedded webserver includes 2 isolated RS-485 ports, configurable for 9.6 to 115.2 kbps. Support for 2 RS-485 protocols (BACnet MS/TP, LON, Modbus RTU). Two RJ-45 10/100 MB Ethernet with TCP/IP support for FOX, BACnet/IP, and Modbus TCP. WiFi connectivity 802.11 a/b/g/n (US WLAN Country Code). Web Interface, embedded Workbench, integrated power supply and USB backup and restore.	IT-8000-USWIFI	2CQG150101R2011
INTEGRA™-N4 network controller with embedded webserver includes 2 isolated RS-485 ports, configurable for 9.6 to 115.2 kbps. Support for 2 RS-485 protocols (BACnet MS/TP, LON, Modbus RTU). Two RJ-45 10/100 MB Ethernet with TCP/IP support for FOX, BACnet/IP, and Modbus TCP. WiFi connectivity 802.11 a/b/g/n (Worldwide WLAN Code). Web Interface, embedded Workbench, integrated power supply and USB backup and restore.	IT-8000-WWWIFI	2CQG150102R2011
IT-8000 initial device capacity pack license. Purchased at time of initial order with core software. Adds support for an additional 1 device or 50 points to the core (IT8-XXX-COR).	IT8-001-DCP	2CQG150105S4061
IT-8000 device capacity upgrade license. Purchased any time after initial core software purchase. Adds support for an additional 1 device or 50 points to the core (IT8-XXX-COR).	IT8-001-DCU	2CQG150106S4061
IT-8000 device core software license file. Adds support for up to 5 devices or 250 points. Requires IT-8000 & IT8-005-SM0	IT8-005-COR	2CQG150107S4061
IT-8000 device capacity upgrade license. Purchased any time after initial core software purchase. Adds support for an additional 5 devices or 250 points to the core (IT8-XXX-COR).	IT8-005-DCU	2CQG150109S4061
Bundled IT-8000 with America WLAN Country Code WiFi enabled. Includes core license for 5 devices or 250 points. Made up of IT-8000-WIFI + IT8-005-COR + IT8-005-SM0.	IT-8005-USWIFI	2CQG150103R2011
Bundled IT-8000 with Worldwide WLAN Code WiFi enabled. Includes core license for 5 devices or 250 points. Made up of IT-8000-WIFI + IT8-005-COR + IT8-005-SM0.	IT-8005-WWWIFI	2CQG150104R2011
IT-8000 device core software license file. Adds support for up to 10 devices or 500 points. Requires IT-8000 & IT8-010-SM0.	IT8-010-COR	2CQG150110S4061
IT-8000 initial device capacity pack license. Purchased at time of initial order with core software. Adds support for an additional 10 devices or 500 points to the core (IT8-XXX-COR).	IT8-010-DCP	2CQG150111S4061

ABB Cylon®
INTEGRA™ IT-8000 (NA)

INTEGRA™ IT-8000 (NA)

Description	Order details	
	Type code	Order code
IT-8000 device capacity upgrade license. Purchased any time after initial core software purchase. Adds support for an additional 10 devices or 500 points to the core (IT8-XXX-COR).	IT8-010-DCU	2CQG150112S4061
Bundled IT-8000 with America WLAN Country Code WiFi enabled. Includes core license for 10 devices or 500 points. Made up of IT-8000-WIFI + IT8-010-COR + IT8-010-SM0.	IT-8010-USWIFI	2CQG150105R2011
Bundled IT-8000 with Worldwide WLAN Code WiFi enabled. Includes core license for 10 devices or 500 points. Made up of IT-8000-WIFI + IT8-010-COR + IT8-010-SM0.	IT-8010-WWWIFI	2CQG150106R2011
IT-8000 device core software license file. Adds support for up to 25 devices or 1,250 points. Requires IT-8000 & IT8-025-SM0.	IT8-025-COR	2CQG150113S4061
IT-8000 initial device capacity pack license. Purchased at time of initial order with core software. Adds support for an additional 25 devices or 1,250 points to the core (IT8-XXX-COR).	IT8-025-DCP	2CQG150114S4061
IT-8000 field capacity upgrade license. Purchased any time after initial core software purchase. Adds support for an additional 25 devices or 1,250 points to the core (IT8-XXX-COR).	IT8-025-DCU	2CQG150115S4061
Bundled IT-8000 with America WLAN Country Code WiFi enabled. Includes includes core license for 25 devices or 1250 points. Made up of IT-8000-WIFI + IT8-025-COR + IT8-025-SM0.	IT-8025-USWIFI	2CQG150107R2011
IT-8000 initial device capacity pack license. Purchased at time of initial order with core software. Adds support for an additional 50 devices or 2,500 points to the core (IT8-XXX-COR).	IT8-050-DCP	2CQG150116S4061
IT-8000 field capacity upgrade license. Purchased any time after initial core software purchase. Adds support for an additional 50 devices or 2,500 points to the core (IT8-XXX-COR).	IT8-050-DCU	2CQG150117S4061
Enables IT-8000 to run NiagaraAX operating system instead of N4.	IT8-0S-AX	2CQG150118S4061
IT-8000 device core software license file. Adds support for up to 100 devices or 5,000 points. Requires IT-8000 & IT8-100-SM0.	IT8-100-COR	2CQG150119S4061
Bundled IT-8000 with America WLAN Country Code WiFi enabled. Includes core license for 100 devices or 5000 points. Made up of IT-8000-WIFI + IT8-100-COR + IT8-100-SM0.	IT-8100-USWIFI	2CQG150109R2011
Bundled IT-8000 with Worldwide WLAN Code WiFi enabled. Includes core license for 100 devices or 5000 points. Made up of IT-8000-WIFI + IT8-100-COR + IT8-100-SM0.	IT-8100-WWWIFI	2CQG150110R2011
IT-8000 device core software license file. Adds support for up to 200 devices or 10,000 points. Requires IT-8000 & IT8-200-SM0.	IT8-200-COR	2CQG150120S4061
Bundled IT-8000 with America WLAN Country Code WiFi enabled. Includes core license for 200 devices or 10000 points. Made up of IT-8000-WIFI + IT8-200-COR + IT8-200-SM0.	IT-8200-USWIFI	2CQG150111R2011
Bundled IT-8000 with Worldwide WLAN Code WiFi enabled. Includes core license for 200 devices or 10000 points. Made up of IT-8000-WIFI + IT8-200-COR + IT8-200-SM0.	IT-8200-WWWIFI	2CQG150112R2011
DEMO VERSION of INTEGRA IT-8000 controller includes 2 EIA-485 ports, configurable for 9.6 to 115.2 kbps. Support for 2 RS-485 protocols (BACnet MS/TP, LON, Modbus RTU, AAM PUP). Two RJ-45 10/100 MB Ethernet with TCP/IP support for FOX, BACnet/IP, and Modbus TCP. WiFi connectivity 802.11 a/b/g/n. Web Interface, embedded Workbench, integrated power supply and USB backup and restore. Includes core DEMO license file with support of up to 500 devices or 25,000 points and all standard drivers.	IT8-DEMO	2CQG150113R2011
IT-8000 driver that enables control of IR controlled AV equipment via an RS-232 connection to a Global Cache FC module. Requires IT8-OS-AX. Supported in AX version 3.8U1 only.	IT8-DR-GLOB	2CQG150307S4061

ABB Cylon®
INTEGRA™ IT-8000 (NA)

INTEGRA™ IT-8000 (NA)

Description	Order details	
	Type code	Order code
IT-8000 driver for European Hortsmann meters. Requires IT8-OS-AX. Supported in AX version 3.8U1 only.	IT8-DR-HORT	2CQG150309S4061
IT-8000 driver for Josam Grease Trap Sensor. Requires IT8-OS-AX. Supported in AX version 3.8U1 only.	IT8-DR-JOS	2CQG150310S4061
IT-8000 driver for Lang Oven over RS-232 or RS-485. Requires IT8-OS-AX. Supported in AX version 3.8U1 only.	IT8-DR-LANGOVN	2CQG150316S4061
IT-8000 driver for Veeder-Root over RS-232 or RS-485. Requires IT8-OS-AX. Supported in AX version 3.8U1 only.	IT8-DR-VDRT	2CQG150314S4061
IT-8000 Expansion Module Accessory Kit. Includes (2) RS-485 and (1) LON-FTT10A connectors.	IT8-EM-OPTKIT	2CQG155809P2061
IT-8000 DIN Rail Mounting Power Supply Unit. 90...240 V AC 20VA.	IT8-PMD20VA	2CQG155801P2061
IT-8000 DIN Rail Mounting Power Supply Unit. 90...240 V AC 30VA.	IT8-PMD30VA	2CQG155802P2061
IT-8000 WIFI Accessory Kit. Includes 2.4/5GHz Antenna, power and (2) RS-485 connectors.	IT8-WIFI-KIT	2CQG155807P2061

ABB Cylon®
INTEGRA™ IT-8000 Software Maintenance Agreements

INTEGRA™ IT-8000 Software Maintenance Agreements

Description	Order details	
	Type code	Order code
IT-8000 software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software IT8-005-COR. Optional 3 or 5 year maintenance may be substituted.	IT8-005-SM0	2CQG153601S4061
IT-8000 software maintenance agreement. 1 year software maintenance agreement for core software IT8-005-COR.	IT8-005-SM1	2CQG153602S4061
IT-8000 software maintenance agreement. 3 year software maintenance agreement for core software IT8-005-COR.	IT8-005-SM3	2CQG153603S4061
IT-8000 software maintenance agreement. 5 year software maintenance agreement for core software IT8-005-COR.	IT8-005-SM5	2CQG153604S4061
IT-8000 software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software IT8-010-COR. Optional 3 or 5 year maintenance may be substituted.	IT8-010-SM0	2CQG153605S4061
IT-8000 software maintenance agreement. 1 year software maintenance agreement for core software IT8-010-COR.	IT8-010-SM1	2CQG153606S4061
IT-8000 software maintenance agreement. 3 year software maintenance agreement for core software IT8-010-COR.	IT8-010-SM3	2CQG153607S4061
IT-8000 software maintenance agreement. 5 year software maintenance agreement for core software IT8-010-COR.	IT8-010-SM5	2CQG153608S4061
IT-8000 software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software IT8-025-COR. Optional 3 or 5 year maintenance may be substituted.	IT8-025-SM0	2CQG153609S4061
IT-8000 software maintenance agreement. 1 year software maintenance agreement for core software IT8-025-COR.	IT8-025-SM1	2CQG153610S4061
IT-8000 software maintenance agreement. 3 year software maintenance agreement for core software IT8-025-COR.	IT8-025-SM3	2CQG153611S4061
IT-8000 software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software IT8-100-COR. Optional 3 or 5 year maintenance may be substituted.	IT8-100-SM0	2CQG153613S4061
IT-8000 software maintenance agreement. 1 year software maintenance agreement for core software IT8-100-COR.	IT8-100-SM1	2CQG153614S4061
IT-8000 software maintenance agreement. 3 year software maintenance agreement for core software IT8-100-COR.	IT8-100-SM3	2CQG153615S4061
IT-8000 software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software IT8-200-COR. Optional 3 or 5 year maintenance may be substituted.	IT8-200-SM0	2CQG153617S4061
IT-8000 software maintenance agreement. 1 year software maintenance agreement for core software IT8-200-COR.	IT8-200-SM1	2CQG153618S4061
IT-8000 software maintenance agreement. 3 year software maintenance agreement for core software IT8-200-COR.	IT8-200-SM3	2CQG153619S4061
IT-8000 software maintenance agreement. 5 year software maintenance agreement for core software IT8-200-COR.	IT8-200-SM5	2CQG153620S4061
IT-8000 software maintenance agreement. 5 year software maintenance agreement for core software IT8-025-COR.	IT8-025-SM5	2CQG153612S4061
IT-8000 software maintenance agreement. 5 year software maintenance agreement for core software IT8-100-COR.	IT8-100-SM5	2CQG153616S4061

ABB Cylon®
INTEGRA-Supervisor (EMEA & FE)

INTEGRA-Supervisor (EMEA & FE)

BTL-listed as an BACnet Advanced Operator Workstation (B-AWS) and BACnet Operator Workstation (B-OWS), the INTEGRA-Supervisor is an enterprise management server class software solution that connects multiple INTEGRA-based IT-8000 controllers, along with other IP-based controllers and field devices, to be networked together. It serves real-time graphical information to standard web-browser clients and provides server-level functions. These functions include centralized data logging/trending, archiving to external databases, alarming, dashboarding, system navigation, master scheduling, database management and integration with other enterprise software applications through an XML interface (oBIX standard). Additionally, the INTEGRA-Supervisor includes a comprehensive graphical engineering toolset for application development.

Description	Order details	
	Type code	Order code
DEMO VERSION of INTEGRA-Supervisor software for Windows OS. Includes all available drivers. License will renew annually with the receipt of annual support fee. NOTE: Demo Licenses for partner engineering and demo use only. Not for end user sales.	ITS-DEMO	2CQG150501S4061
INTEGRA-Supervisor CSV database driver. Requires ITS-XXX-SUP.	ITS-DR-CSV	2CQG150502S4061
INTEGRA-Supervisor MYSQL database driver. Requires ITS-XXX-SUP.	ITS-DR-MYSQL	2CQG150503S4061
INTEGRA-Supervisor Oracle 11G database driver. Requires ITS-XXX-SUP.	ITS-DR-ORCL	2CQG150505S4061
INTEGRA-Supervisor JSON Toolkit for Supervisor (SMA Required).	ITS-DR-JSON	2CQG150507S4061
INTEGRA-Supervisor software core with support for 0 Niagara network connections. Includes standard drivers. Requires ITS-000-SM0. Typically used to manage TCP/IP field devices (requires ITS-XXX-DIP).	ITS-000-SUP	2CQG153202S4061
Adds one additional Niagara connection to INTEGRA-Supervisor core ITS-000-SUP to ITS-100-SUP.	ITS-001-ADD	2CQG153203S4061
INTEGRA-Supervisor software core with support for 1 Niagara network connection. Includes standard drivers. Requires ITS-001-SM0.	ITS-001-SUP	2CQG153204S4061
INTEGRA-Supervisor software core with support for 10 Niagara network connections. Includes standard drivers. Requires ITS-010-SM0.	ITS-010-SUP	2CQG153209S4061
INTEGRA-Supervisor software core with support for 100 Niagara network connections. Includes standard drivers. Requires ITS-100-SM0.	ITS-100-SUP	2CQG153214S4061
INTEGRA-Supervisor upgrade to ITS-100-SUP from ITS-000-SUP to ITS-010-SUP. Will maintain any ITS-001-ADD that were added to original core (ITS-XXX-N4).	ITS-100-UPG	2CQG153215S4061
INTEGRA-Supervisor Alarm Console client. Support for Niagara alarm monitoring.	ITS-ALM-CNSL	2CQG153218S4061
INTEGRA-Supervisor upgrade from ITS-100-SUP to ITS-UNL-SUP.	ITS-UNL-UPG	2CQG153222S4061
INTEGRA-Supervisor software core with support for unlimited Niagara network connections. Includes standard drivers. Requires ITS-UNL-SM0.	ITS-UNL-SUP	2CQG153221S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 500 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-010-DIP-E	2CQG153232S4061

ABB Cylon®
INTEGRA-Supervisor (EMEA & FE)

INTEGRA-Supervisor (EMEA & FE)

Description	Order details	
	Type code	**Order code**
INTEGRA-Supervisor Device Integration Pack license. Adds support for 1,250 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-025-DIP-E	2CQG153233S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 2,500 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-050-DIP-E	2CQG153234S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 50,000 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-1000-DIP-E	2CQG153235S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 100 non-Niagara devices or 5,000 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-100-DIP-E	2CQG153236S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 10,000 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-200-DIP-E	2CQG153237S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 25,000 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-500-DIP-E	2CQG153238S4061
License change fee to change an existing license at the request of the customer. Applies to all license changes for either IT-8000 or INTEGRA-Supervisor software, except when a driver, upgrade or other software is purchased.	IT-LIC-CHG	2CQG153701S4061
Bundled IT-8000 with Worldwide WLAN Code WiFi enabled. Includes includes core license for 25 devices or 1250 points. Made up of IT-8000-WIFI + IT8-025-COR + IT8-025-SM0.	IT-8025-WWWIFI	2CQG150108R2011
IT-8000 driver for Helvar Lighting Control. Requires IT8-OS-AX. Supported in AX version 3.8U1 only.	IT8-DR-HELV	2CQG150308S4061

Description	Order details	
	Type code	**Order code**
INTEGRA-ProPack License File. Supports up to 5 devices on non-Cylon IT-8000 or INTEGRA-Supervisor software. INTEGRA-ProPack is included at no cost on IT-8000 or INTEGRA-Supervisor software.	INT-PPACK-5	2CQG153401S4061
INTEGRA-ProPack License File. Supports up to 10 devices on non-Cylon IT-8000 or INTEGRA-Supervisor software. INTEGRA-ProPack is included at no cost on IT-8000 or INTEGRA-Supervisor software.	INT-PPACK-10	2CQG153402S4061
INTEGRA-ProPack License File. Supports up to 25 devices on non-Cylon IT-8000 or INTEGRA-Supervisor software. INTEGRA-ProPack is included at no cost on IT-8000 or INTEGRA-Supervisor software.	INT-PPACK-25	2CQG153403S4061
INTEGRA-ProPack License File. Supports up to 50 devices on non-Cylon IT-8000 or INTEGRA-Supervisor software. INTEGRA-ProPack is included at no cost on IT-8000 or INTEGRA-Supervisor software.	INT-PPACK-50	2CQG153404S4061
INTEGRA-ProPack License File. Supports up to 100 devices on non-Cylon IT-8000 or INTEGRA-Supervisor software. INTEGRA-ProPack is included at no cost on IT-8000 or INTEGRA-Supervisor software.	INT-PPACK-100	2CQG153405S4061
INTEGRA-ProPack License File. Supports up to 50 devices on non-Cylon IT-8000 or INTEGRA-Supervisor software. INTEGRA-ProPack is included at no cost on IT-8000 or INTEGRA-Supervisor software.	INT-PPACK-200	2CQG153406S4061
INTEGRA-Supervisor software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software ITS-000-SUP. Optional 3 or 5 year maintenance may be substituted.	ITS-000-SM0	2CQG153621S4061

ABB Cylon®
INTEGRA-Supervisor (EMEA & FE)

INTEGRA-Supervisor (EMEA & FE)

Description	Order details	
	Type code	Order code
INTEGRA-Supervisor software maintenance agreement. 1 year software maintenance agreement for core software ITS-000-SUP.	ITS-000-SM1	2CQG153622S4061
INTEGRA-Supervisor software maintenance agreement. 3 year software maintenance agreement for core software ITS-000-SUP.	ITS-000-SM3	2CQG153623S4061
INTEGRA-Supervisor software maintenance agreement. 5 year software maintenance agreement for core software ITS-000-SUP.	ITS-000-SM5	2CQG153624S4061
INTEGRA-Supervisor software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software ITS-001-SUP. Optional 3 or 5 year maintenance may be substituted.	ITS-001-SM0	2CQG153625S4061
INTEGRA-Supervisor software maintenance agreement. 1 year software maintenance agreement for core software ITS-001-SUP.	ITS-001-SM1	2CQG153626S4061
INTEGRA-Supervisor software maintenance agreement. 3 year software maintenance agreement for core software ITS-001-SUP.	ITS-001-SM3	2CQG153627S4061
INTEGRA-Supervisor software maintenance agreement. 5 year software maintenance agreement for core software ITS-001-SUP.	ITS-001-SM5	2CQG153628S4061
INTEGRA-Supervisor software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software ITS-010-SUP. Optional 3 or 5 year maintenance may be substituted.	ITS-010-SM0	2CQG153637S4061
INTEGRA-Supervisor software maintenance agreement. 1 year software maintenance agreement for core software ITS-010-SUP.	ITS-010-SM1	2CQG153638S4061
INTEGRA-Supervisor software maintenance agreement. 3 year software maintenance agreement for core software ITS-010-SUP.	ITS-010-SM3	2CQG153639S4061
INTEGRA-Supervisor software maintenance agreement. 5 year software maintenance agreement for core software ITS-010-SUP.	ITS-010-SM5	2CQG153640S4061
INTEGRA-Supervisor software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software ITS-100-SUP. Optional 3 or 5 year maintenance may be substituted.	ITS-100-SM0	2CQG153641S4061
INTEGRA-Supervisor software maintenance agreement. 1 year software maintenance agreement for core software ITS-100-SUP.	ITS-100-SM1	2CQG153642S4061
INTEGRA-Supervisor software maintenance agreement. 3 year software maintenance agreement for core software ITS-100-SUP.	ITS-100-SM3	2CQG153643S4061
INTEGRA-Supervisor software maintenance agreement. 5 year software maintenance agreement for core software ITS-100-SUP.	ITS-100-SM5	2CQG153644S4061
INTEGRA-Supervisor software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software ITS-UNL-SUP. Optional 3 or 5 year maintenance may be substituted.	ITS-UNL-SM0	2CQG153645S4061
INTEGRA-Supervisor software maintenance agreement. 1 year software maintenance agreement for core software ITS-UNL-SUP.	ITS-UNL-SM1	2CQG153646S4061
INTEGRA-Supervisor software maintenance agreement. 3 year software maintenance agreement for core software ITS-UNL-SUP.	ITS-UNL-SM3	2CQG153647S4061
INTEGRA-Supervisor software maintenance agreement. 5 year software maintenance agreement for core software ITS-UNL-SUP.	ITS-UNL-SM5	2CQG153648S4061

Description	Order details	
	Type code	Order code
INTEGRA Annual Renewal Fee for Demo equipment and Workbench licences for SI partner.	INTEGRA-RENEW-1	2CQG153901S4061

ABB Cylon®
INTEGRA-Supervisor (NA)

INTEGRA-Supervisor (NA)

BTL-listed as an BACnet Advanced Operator Workstation (B-AWS) and BACnet Operator Workstation (B-OWS), the INTEGRA-Supervisor is an enterprise management server class software solution that connects multiple INTEGRA-based IT-8000 controllers, along with other IP-based controllers and field devices, to be networked together. It serves real-time graphical information to standard web-browser clients and provides server-level functions. These functions include centralized data logging/trending, archiving to external databases, alarming, dashboarding, system navigation, master scheduling, database management and integration with other enterprise software applications through an XML interface (oBIX standard). Additionally, the INTEGRA-Supervisor includes a comprehensive graphical engineering toolset for application development.

Description	Order details	
	Type code	Order code
INTEGRA-Supervisor software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software ITS-002-SUP. Optional 3 or 5 year maintenance may be substituted.	ITS-002-SM0	2CQG153629S4061
INTEGRA-Supervisor software maintenance agreement. 1 year software maintenance agreement for core software ITS-002-SUP.	ITS-002-SM1	2CQG153630S4061
INTEGRA-Supervisor software maintenance agreement. 3 year software maintenance agreement for core software ITS-002-SUP.	ITS-002-SM3	2CQG153631S4061
INTEGRA-Supervisor software maintenance agreement. 5 year software maintenance agreement for core software ITS-002-SUP.	ITS-002-SM5	2CQG153632S4061
INTEGRA-Supervisor software core with support for 2 Niagara network connections. Includes standard drivers. Requires ITS-002-SM0.	ITS-002-SUP	2CQG153205S4061
INTEGRA-Supervisor software maintenance agreement. 18 month software maintenance agreement. Must be purchased in conjunction with initial core software ITS-003-SUP. Optional 3 or 5 year maintenance may be substituted.	ITS-003-SM0	2CQG153633S4061
INTEGRA-Supervisor software maintenance agreement. 1 year software maintenance agreement for core software ITS-003-SUP.	ITS-003-SM1	2CQG153634S4061
INTEGRA-Supervisor software maintenance agreement. 3 year software maintenance agreement for core software ITS-003-SUP.	ITS-003-SM3	2CQG153635S4061
INTEGRA-Supervisor software maintenance agreement. 5 year software maintenance agreement for core software ITS-003-SUP.	ITS-003-SM5	2CQG153636S4061
INTEGRA-Supervisor software core with support for 3 Niagara network connections. Includes standard drivers. Requires ITS-003-SM0.	ITS-003-SUP	2CQG153206S4061
Adds the ability for a ITS-000-SUP, ITS-001-SUP, ITS-002-SUP or ITS-003-SUP to run 5 additional stations. Typically used for small site multi-tenant options.	ITS-005-STN	2CQG153207S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 10 non-Niagara devices or 500 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-010-DIP	2CQG153208S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 25 non-Niagara devices or 1,250 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-025-DIP	2CQG153210S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 50 non-Niagara devices or 2,500 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-050-DIP	2CQG153211S4061

ABB Cylon®
INTEGRA-Supervisor (NA)

INTEGRA-Supervisor (NA)

Description	Order details	
	Type code	Order code
INTEGRA-Supervisor Device Integration Pack license. Adds support for 1,000 non-Niagara devices or 50,000 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-1000-DIP	2CQG153212S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 100 non-Niagara devices or 5,000 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-100-DIP	2CQG153213S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 200 non-Niagara devices or 10,000 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-200-DIP	2CQG153216S4061
INTEGRA-Supervisor Device Integration Pack license. Adds support for 500 non-Niagara devices or 25,000 points to INTEGRA-Supervisor core software (ITS-XXX-SUP). Standard drivers included. Requires ITS-XXX-SUP.	ITS-500-DIP	2CQG153217S4061
INTEGRA-Supervisor Micros Fidelio Driver. Requires ITS-XXX-SUP.	ITS-DR-MFID	2CQG150508S4061
INTEGRA-Supervisor OPC Client over Ethernet database driver. Requires ITS-XXX-SUP. Available only for Windows OS.	ITS-DR-OPC-CL	2CQG150504S4061
INTEGRA-Supervisor SQL database driver. Requires ITS-XXX-SUP.	ITS-DR-SQL	2CQG150506S4061
Provides FIPS 140-2 Level 1 conformance using the integrated FIPS certified BouncyCastle module for N4 Supervisor. Requires ITS-XXX-SUP version 4.6 and later.	ITS-FIPS	2CQG150509S4061
Provides FIPS 140-2 Level 1 conformance using the integrated FIPS certified BouncyCastle module for N4 Supervisor. Requires ITS-XXX-SUP version 4.6 and later.	ITS-FIPS	2CQG153219S4061
Option to install a NiagaraAX based application on a N4 Supervisor (ITS-XXX-SUP). Supports NiagaraAX version 3.8 only.	ITS-OS-AX-SUP	2CQG153220S4061
DEMO VERSION of INTEGRA-Supervisor and Workbench Engineering Tool.	OFFICE-DEMO-PC	2CQG153239S4061

Description	Order details	
	Type code	Order code
Monthly Support fee and renewal of Demo equipment and Workbench licenses for new SI partner. Per month in first year before renewal.	INTEGRA-RENEW-2	2CQG153902S4061

ABB Cylon®

Unitron Main Plant Controllers

UC32

UC32

Description	Order details	
	Type code	Order code
Programmable controller, 8 Uniputs™, 8 Uniputs™ + Relays, 8 Universal Inputs, Up to 16 controllers per fieldbus, Flash upgradable firmware, Time-stamped datalogs, 1024 strategy blocks, 32 datalogs with up to 1024 entries per datalog, Max address = 16.	UC32.24	2CQG251011R1021
Programmable controller, 8 Uniputs™ + Relays, 8 Universal Inputs, Up to 16 controllers per fieldbus, Flash upgradable firmware Time-stamped datalogs, 1024 strategy blocks, 32 datalogs with up to 1024 entries per datalog, Max address = 16.	UC32.16	2CQG251007R1021
Programmable controller 4 Uniputs™ + Relays, 4 Universal Inputs Up to 32 controllers per fieldbus Flash upgradable firmware, Time-stamped datalogs, 1024 strategy blocks 32 datalogs with up to 1024 entries per datalog, Max address = 32.	UC32.8	2CQG251001R1021
A replacement for the legacy UCxx range of Field Controllers, based on UC32 hardware.	PG32.16 (UC32.PG)	2CQG251009R1021

Unitron Unitary Controllers

UCU10FC/K

UCU10FC/K

Description	Order details	
	Type code	Order code
Programmable unitary controller with interface for UCU Room Display, 3 Universal Inputs, 2 Universal Outputs, 2 Triac Outputs, 3 Relay Digital Outputs Up to 63 controllers per fieldbus 190 strategy blocks, 4 datalogs with up to 102 entries per datalog, Data security, Max address = 63.	UCU10FC/K	2CQG251303R1021

ABB Cylon®

Unitron Communications Controllers

UC32.netK

UC32.netK

Description	Order details	
	Type code	Order code
Ethernet based peer-to-peer communications controller with internal display and keypad, RS232 Service Port, RS232 External Keypad port, RS232 Modem / printer port, RS485 Fieldbus, Embedded web server for configuration, Max Field Controllers: 63, Modbus option not included.	UC32.netK	2CQG250901R1021

UC32.netK/WEB/MOD

UC32.netK/WEB/MOD

	Order details	
Description	Type code	Order code
Ethernet based peer-to-peer communications controller with internal display and keypad, RS232 Service Port, RS232 External Keypad port, RS232 Modem / printer port, RS485 Fieldbus, Embedded WebLink web server included, Max Field Controllers: 63, Modbus communication RS232 / RS485 included, Max Modbus devices: 48.	UC32.netK/ WEB/M OD	2CQG250903R1021

Unitron Relays

UC32RP8

UC32R

Description	Order details	
	Type code	Order code
External relay pack with 8 relays, screw terminals.	UC32-RP8	2CQG205301R1021
External relay pack with 4 raise/lower relays, screw terminals.	UC32-RL4	2CQG205303R1021

END OF LIFE

UC32-RL4

ABB Cylon®

Unitron Engineering Software

CEC - Licence (Software)

Description	Order details	
	Type code	**Order code**
CEC - Licence (Software) This Licence allows the use of the Cylon® Engineering Centre programming software.	CEC-LIC-MU	2CQG253413S3021
CEC - Additional (Software) Additional licence for use of the Cylon Engineering Centre programming software. Only available once 1M4UC130 has been purchased.	CEC-LIC-MU-ADD	2CQG253412S3021

ABB Cylon®

Unitron Supervision Software

UCC Licence Soft Dongle

Description	Order details	
	Type code	**Order code**
Unitron Command Centre Site Licence allows the use of Unitron Command Centre Supervisory Software. Includes 1 Soft Dongle. Recommended for sites where 5 or more Unitron Command Centre dongles are required. Note: There is a cost associated with transferring this licence. Please contact your local area sales manager before transferring the licence.	UCC-LIC-MU	2CQG253409S3021
Additional Soft dongle for use of Unitron Command Centre Supervisory Software. Only available for purchase and use on sites with a valid Unitron Command Centre SITE LICENCE 1M4SW460. Note: There is a cost associated with transferring this licence. Please contact support@cylon.com before transferring the licence.	UCC-LIC-MU-ADD	2CQG253411S3021
Unitron Command Centre Single User allows the use of Unitron Command Centre Supervisory Software. Includes 1 Dongle. Note: There is a cost associated with transferring this licence. Please contact support@cylon.com before transferring the licence.	UCC-LIC-SU	2CQG253410S3021

UCC Single User Soft Dongle

Description	Order details	
	Type code	**Order code**
The OPC SERVER provides an interface between OPC DA 2.05 compliant SCADA packages and the UC32 and UCU range of field controllers. Includes single server licence.	OPC SERVER	2CQG255905S3021

ABB Cylon®

Displays & Smart Sensors

eXplore

eXplore

Designed with flexibility and control in mind, eXplore puts building energy management at your fingertips. With eXplore, users can easily manage operating parameters of the connected systems: monitoring values, equipment, and system status viewing trends and active system alarms to perform diagnostics and take corrective actions such as overriding or adjusting setpoints.

Description	Order details	
	Type code	Order code
eXplore C7 7" touchscreen for use with either ASPECT® HTML interfaces, or Cylon's easy to program, easy to use menu-based SiteGuide user interface for basic supervision of a Cylon® BMS site. Includes plug-top power supply.	EXP-C7	2CQG202003R2021
eXplore-C10 10.1" touchscreen for use with either ASPECT® HTML interfaces, or Cylon's easy to program, easy to use menu-based SiteGuide user interface for basic supervision of a Cylon® BMS site. Includes plug-top power supply.	EXP-C10	2CQG202002R2021

FA-T

ABB FusionAir Smart Sensor*

The ABB FusionAir Smart Sensor series provides a slim, compact, and visually appealing room control display with a high definition capacitive touch backlit LCD display for use with ABB's Cylon FLXeon and CB Line BACnet field controllers. The intelligent temperature and humidity sensor allow users to view and adjust selected parameters within the field controller to which it is connected. Other sensing options available for integration with the CXproHD control strategy are CO_2 sensing, and contacts for the addition of Passive Infra-Red (PIR) occupancy detection. The ABB FusionAir Smart Sensor display can be used to view control parameters and adjust HVAC, lighting and sunblind set points for the connected controller. The ABB FusionAir Smart Sensor can be installed as part of a multi-sensor application for larger spaces or multiple room connection. The system can also provide a Safe Indoor Environment against pandemic-causing viruses (such as Covid-19) through offering a patented* safe touch-free user interaction with the sensor which gives clear feedback of the safety status in a room.

Description	Order details	
	Type code	Order code
ABB FusionAir Sensor Analog Temperature only.	FA-T	2CQG505560R1011
ABB FusionAir Smart Sensor Temperature + RH.	FA-TH	2CQG505561R1011
ABB FusionAir Smart Sensor Temperature + RH + CO_2.	FA-THC	2CQG505563R1011
ABB FusionAir Smart Sensor Temperature + RH + Display.	FA-TH-D	2CQG505564R1011
ABB FusionAir Smart Sensor Temperature + RH + CO_2 + Display.	FA-THC-D	2CQG505566R1011

* Patent Publication of US20220244686A1 (Pending)

ABB Cylon®

Displays & Smart Sensors

CBT-STAT

CBT-STAT

The CBT-STAT and CBT-STAT-H provide visually appealing room control display for use with Cylon's CB Line BACnet® field controllers. The intelligent temperature sensor CBT-STAT and the CBT-STAT-H with integrated humidity sensor allow users to view and adjust selected parameters within the field controller to which it is connected. Use of the CBT-STAT(-H) avoids the need for any special tools of software to fully configure and commission a VAV controller. The configuration and commissioning is password-protected to prevent unauthorized changes. Each CB Line field controller automatically detects the presence of the CBT-STAT, and selfconfigures to utilize the CBT-STAT as the control interface. In Engineering Mode, the display can be used as the setup and commissioning tool. The CBT-STAT can be used to setup the communications parameters, all the default settings and do complete balancing of the VAV box.

Description	Order details	
	Type code	Order code
Intelligent Room Control Display w/ Temp sensor (any CBT product supported).	CBT-STAT	2CQG505506R2021
Intelligent Room Control Display w/ Temp & Humidity sensor (any CBT product supported).	CBT-STAT-H	2CQG505507R2021

UCU Room Keypad

UCU Room Keypad

A dedicated room control display for fan coil control. The programmable display allows the user to view and adjust selected parameters within the controller to which it is connected.
Note: Only compatible with UCU10FC/K and CB Line.

Description	Order details	
	Type code	Order code
A dedicated room control display for fan coil control. The programmable display allows the user to view and adjust selected parameters within the controller to which it is connected. Note: Only compatible with the UCU10FC/K, UCU10VAV/K CBT12 and CBX-8R8 controllers.	UCU-KEY-PAD	2CQG256501R1021

ABB Cylon®

Sensors - Wired

Room Temperature Sensor (WRF04)

Room Temperature Sensor

Description	Order details	
	Type code	Order code
NTC10k, -35...+70°C, Housing: ABS, pure white (RAL9010), IP20, 84.5 x 84.5 x 25mm, Surface Mounting.	WRF04	2CQG505113R2021

Room Temperature Sensor (WRF04P)

Room Temperature Sensor with adjust

Description	Order details	
	Type code	Order code
NTC10k, -35...+70°C, Housing: ABS, pure white (RAL9010), IP20, 84.5 x 84.5 x 25mm, Surface Mounting, Potentiometer 5 kΩ, 3-wire conductor (-,0,+).	WRF04P	2CQG505114R2021

Mounting Flange

Description	Order details	
	Type code	Order code
Material PA6.6 glass ball reinforced D = 55mm, Colour black, for sensor pocket D = 7 mm.	MF7	2CQG505804R2021

ABB Cylon®

Sensors - Wired

Outdoor Temperature Sensor (AGS54)

Outdoor Temperature Sensor

Description	Order details	
	Type code	Order code
NTC10k, -50...+90 °C, Housing: Polyamide white, IP65, 65 x 50 x 37.5 mm.	AGS54	2CQG505101R2021

Contact Temperature Sensor (VFG54)

Contact Temperature Sensor

Description	Order details	
	Type code	Order code
NTC10k, -35...+120 °C, Housing: Polyamide white, IP65, 65 x 50 x 37.5mm, Clamp not supplied.	VFG54	2CQG505112R2021

62 mm Immersion Temperature Sensor (AKF106207)

Immersion Temperature Sensor 62 mm

Description	Order details	
	Type code	Order code
NTC10k, -50...+150 °C, Connection head: Polyamide white, IP65, Probe: 62 x 7 mm, 316Ti Stainless Steel.	AKF106207	2CQG505106R2021

Immersion PocketBrass (THMS 50 x 10 x 1 mm)

Immersion Pocket Brass 50 mm

Description	Order details	
	Type code	Order code
50 x 10 x 1 mm, Brass nickel-plated, SW22, G½", PN16, use with AKF106207.	THMS	2CQG505805R2021

ABB Cylon®

Sensors - Wired

135 mm Immersion Temperature Sensor 135mm (AKF1013507)

Immersion Temperature Sensor 135 mm

Description	Order details	
	Type code	Order code
NTC10k, -50...+150 °C, Connection head: Polyamide white, IP65, Probe: 135 x 7 mm, 316Ti Stainless Steel.	AKF1013507	2CQG505103R2021

Immersion Pocket Brass (THMS 120 x 10 x 1 mm)

Immersion Pocket Brass 120 mm

Description	Order details	
	Type code	Order code
120 x 10 x 1mm, Nickel-plated, SW22, R½", PN 16, use with AKF1013507.	THMS 120x10x1mm	2CQG505806R2021

ABB Cylon®

Demonstration & Technical Services

Description	Order details	
	Type code	Order code
The net daily rate for a Cylon® Engineer on-site support (excluding travel, accommodation & subsistence expenses which are charged additionally at cost).	SUP-SITE	2CQG204007R5021
Cylon® runs open engineering and installation training courses at its offices. This is the net daily rate per person. Visit support.cylon.com for booking details.	TRA-CYL	2CQG204003R5021
Cylon® provides off-site training on request for specific customers. This is the net daily rate for the course for up to 2 attendees (excluding travel, accommodation & subsistence expenses which are charged additionally at cost).	TRA-OFF	2CQG204005R5021
For off-site training additional attendees are charged at this net daily rate per person.	TRA-OFF-ADD	2CQG204006R5021
For open courses attendees may cancel up to 2 weeks in advance. If cancellation is made less than 2 weeks in advance of the course the following net daily cancellation rate per person applies.	TRA-CAN	2CQG204004R5021
Change any Hardware Dongle to the equivalent Soft Dongle.	HD-SW-EX	2CQG603704S5021
Move a Software licence (Soft Dongle) from one PC to another PC.	PC-PC-EX	2CQG603705S5021
The net daily rate for a Cylon® Engineer on-site support (including travel, accomodation & subsistence expenses) during our normal working hours 9.00am-5.00pm. Exludes weekends and bank and public holidays which will be charged at a higher rate.	SUP-SITE-EX	2CQG204008R5021
The Cylon® Fidelio Gateway provides an interface between Unitron BEMS networks and Micros Fidelio system, allowing UnitronUC32 to read room check-in status. The gateway supports up to 2,000 datapoints (rooms). Note: Must be ordered with additional TSG services.	UNI-FID-GW	2CQG255903R1021

CBX/FLX Demo Suitcase

CBX/FLX Demo Suitcase

	Order details	
Description	Type code	Order code
ASPECT® Demonstration case containing: MATRIX, CBX, FLX and Touchscreen. (Europe).	CBX-DEM-CSE-E	2CQG205802R5021
ASPECT® Demonstration case containing: MATRIX, CBX, FLX and Touchscreen. (UK/IE).	CBX-DEM-CSE-UK	2CQG205803R5021
ASPECT® Demonstration case containing: MATRIX, CBX, FLX and Touchscreen. (US/CA).	CBX-DEM-CSE-US	2CQG205801R5021

ABB Cylon®

Other

EIBAS-100T/R

EIBAS-100T/R

Ethernet switch - DIN rail mounted 5 ports. Auto port polarity detection. PSU 24V AC.

Description	Order details	
	Type code	Order code
Ethernet switch - DIN rail mounted 5 ports. Auto port polarity detection. PSU 24V AC.	EIBAS-100T/R	2CQG605801R2021

UC16 to PC Cable

UCU Molex female to 9 Pin D-Type female PC serial communication cable, 2m. Used for PC to UCU commissioning.

Description	Order details	
	Type code	Order code
UCU Molex female to 9 Pin D-Type female PC serial communication cable, 2m. Used for PC to UCU commissioning.	UC16-PCC	2CQG255701R1021

Spares

UCKRA420

UCKRA420

Panel mounted, surface mounted or handheld remote serial display and keypad with 2m cable for connection to compatible controllers (UC32.netK, UC32.xx, UCxxPG-R, UCC4/3P/K). Limited compatibility with BACnet controllers. Does not support BACnet objects.

Description	Order details	
	Type code	Order code
Keypad interface which allows conditions on a Unitron site to be viewed and changed. It can also be used to configure UC32 controllers.	UCKRA420	2CQG202014R1021

ABB Cylon®

Withdrawn Product/Spares

CBM24

Description	Order details	
	Type code	Order code
UC32 RJ-45 connector male (plug) to 9 pin D-type female PC commissioning cable.	UC32-CC	2CQG255703R1021
24-Point BACnet B-AAC programmable controller for control and monitoring of small plant or HVAC equipment. Controller features 8 UniPutsTM with Relay outputs (software configured for AI, AO, DI or DO-R (Relay), 8 UI and 8 UniPutsTM (software configured for AI, AO, DI, or DO (using AO with external relay). Maximum of 1024 strategy blocks.	CBM24	2CQG201011R1021
NTC10k, -35...+70 °C, Housing: ABS, pure white (RAL9010), IP20, 84.5 x 84.5 x 25mm, Temperature range: Operating elements: Potentiometer 1 kOhm (-,0,+) Rotary Switch (Auto, 0,I,II,III).	WRF04FC	2CQG505116R2021
Power Supply: Solar energy, Maintenance free, Measuring Range: 0...40°C, Accuracy (5...35°C): ±0,4K, Housing: ABS (ASA), IP20, Colour white similar RAL 9010.	SR04	2CQG505201R2021
Power Supply: Solar energy, Maintenance free, Measuring Range: Humidity 0...100% Temperature 0...40°C, Accuracy: Humidity 1 Point Calibration 50%: ±3% Range (30%...70)%: ±4%, Accuracy: Temperature (5...35°C): ±0,4K, Housing: ABS (ASA), IP20, Colour white similar RAL 9010.	SR04RH	2CQG505202R2021
Power supply: Battery 3 V Type CR1620, Measuring Range: 10...90 °C, Accuracy (15...85 °C): ±0.8 K, Housing: PA6, IP65, Colour: white, Clamp not supplied.	SR65VF GBAT	2CQG505204R2021
Serial to RJ12 adapter for CBT. Allows CBT to be configured using legacy Serial port.	Serial to RJ12 adapter	2CQG205702R1021
UCC4.net 9 pin D-type male, UCU service port Molex female to 9 pin D-type male plug serial communication adapter, 15 cm. Requires hand held device with suitable 9 pin D-type socket serial cable (not supplied).	UCC4/ UCU-SPC	2CQG255704R1021
RS485 MODBUS Protocol, Power supply: 15-24 V DC or 24 V AC ±10 %, Interface: RS485 - MODBUS, Antenna: Internal, Housing: ABS, IP20, Colour white similar RAL9010.	SRCRS485 MODBU S	2CQG505807R2021

Duct Temperature Sensor 465 mm

Duct Temperature Sensor (AKF1046507)

Description	Order details	
	Type code	Order code
NTC10k, -50...+150 °C, Connection head: Polyamide white, IP65, Probe: 465 x 7 mm, 316Ti Stainless Steel.	AKF1046507	2CQG505105R2021

Immersion Pocket Stainless Steel 50 mm

Immersion Pocket Stainless Steel (THVA 50 x 10 x 1 mm)

Description	Order details	
	Type code	Order code
50 x 10 x 1 mm, 316Ti Stainless Steel, SW24, G½", ISO 228T1, PN40, Use with AKF106207.	THVA	2CQG505111R2021

Room Air-Quality Sensor (LW04)

Room Air-Quality Sensor (LW04)

Description	Order details	
	Type code	Order code
Output: 0...10 V, Uv = 15...24V DC / 15...24 V AC, Housing: ABS, pure white (RAL9010), IP20, 84.5 x 84.5 x 25 mm.	LW04	2CQG505110R2021

ABB Cylon®

Withdrawn Product/Spares

Room Temperature Sensor with Pot. & Button (WRF04PT)

Room Temperature Sensor with adjust and override

- Measuring insert: 1x NTC 10 kΩ
- Temperature range: -35...+70 °C
- Housing: ABS, pure white (RAL9010), IP20
- L 84.5 x B 84.5 x H 25 mm

Description	Order details	
	Type code	Order code
NTC10k, -35...+70°C, Housing: ABS, pure white (RAL9010), IP20, 84.5 x 84.5 x 25 mm, Surface Mounting, Potentiometer 5 kΩ, 3-wire conductor (-,0,+), Switch close contact, max. load 600 mW.	WRF04PT	2CQG505115R2021

192 mm Duct Temperature Sensor (AKF1019207)

Duct Temperature Sensor 192 mm

- Measuring insert SI-Protection: 1 x NTC10k
- Temperature range: -50...+150°C
- Material: 316Ti Stainless Steel
- Connection head: Polyamide white IP65
- Probe: SH EL = 192 x 7 mm

Description	Order details	
	Type code	Order code
NTC10k, -50...+150 °C, Connection head: Polyamide white, IP65, Probe: 192 x 7 mm, 316Ti Stainless Steel.	AKF1019207	2CQG505104R2021

Notes

EMERGENCY LIGHTING

Electrical installation solutions for buildings
Emergency Lighting

Index

Introduction	2
Emergency lighting portfolio Standards	6
Emergency lighting portfolio Emergi-Lite & Lightalarms - USA	8
Emergency lighting portfolio Emergi-Lite Lumacell Ready -CAN	10
Emergency lighting portfolio Emergi-Lite - UK-MEA	12
Emergency lighting portfolio VanLien - BE-NL-LU	16
Emergency lighting portfolio Kaufel - DE	18
Emergency lighting portfolio Kaufel-FR	20
Emergency lighting portfolio ABB – EN1838	22
Emergency lighting portfolio Stanilite - AU-NZ	26
Emergency lighting portfolio ABB - China	32
Emergency lighting portfolio Central Battery Systems including inverters Emergi-Lite, Lumacell, Ready-Lite, Lightalarms - North America	34
Emergency lighting portfolio ABB - Central power supply systems	36
Nexus®Pro products Intelligent monitoring management system - USA	38
Nexus® Compatible products Intelligent monitoring management system - USA	39
Nexus® Compatible products Intelligent monitoring management system - CAN	41
Monitoring and testing	44
Nexus® Pro	46
DALI	50
KNX Integration	54
Naveo®Pro	56
Stanilite NexusRF Infinity	60
ABB CBS	62

Emergency lighting
A head of safety

By choosing ABB as your emergency lighting partner, you'll be placing your projects, your systems, and essentially your people, in safe hands.

—
01

—
01 We support emergency lighting projects on all scales

When choosing a partner for emergency lighting, you need a supplier capable of delivering a solution whenever the need arises, whether you're planning a new build project, overseeing an installation, or considering renewal of a long-standing system.

We are a leading life safety solutions provider, delivering state-of-the-art systems and products into the emergency lighting marketplace.

We focus on supporting our customers at all points of the emergency lighting life-cycle, whether planning, installing, managing or renewing.

Years of experience
Supporting emergency lighting projects on all scales, backed by friendly service, technical expertise and our continual drive towards new product innovation makes us the number one choice for emergency lighting.

Construction engineers and installers are assured that orders can be easily placed, deliveries arrive promptly, and that any issues are resolved quickly to a satisfactory outcome.

Our products and services are specifically designed to provide the most effective protection and safety, in line with customer needs, relevant standards and industry regulations. These solutions start at the planning stage for emergency lighting systems, with advice on product selection and system requirements, through to delivery of certified technical drawings.

With project time-lines tight and budgets constrained, choosing the right partner for emergency lighting system design is imperative. We would like to help you in making the right start.

We work at the heart of this complex process, assisting designers, specifiers, and final customers with all manner of emergency lighting needs.

Efficient emergency lighting solutions
Life-cycle

The concept is clear and simple. Providing you a reliable, total solution for safe evacuation. The way in which we do this is what makes the difference.
We offer advantages to everybody involved throughout the life-cycle process. That way, you know that ABB is always the right choice, for both you and your customers.

Advice and information during the design phase
In the design phase, it is important for you to have all the information. If desired, we can provide you with that in the form of specific project advice, based on the most recent regulations, standards and safety requirements. We always offers you the necessary information in the most compact form, so that you quickly have an overview of all the available information.

Speed and materials during the installation phase
Speed and timing are essential during the installation phase, because the easy-to-install materials must be at the construction site at the right time. That is why luminaires are always in stock, or short lead time from the manufacturing facility. If you perform the installation yourself, clear assembly instructions, packaging instructions and a modular system give you a head start.

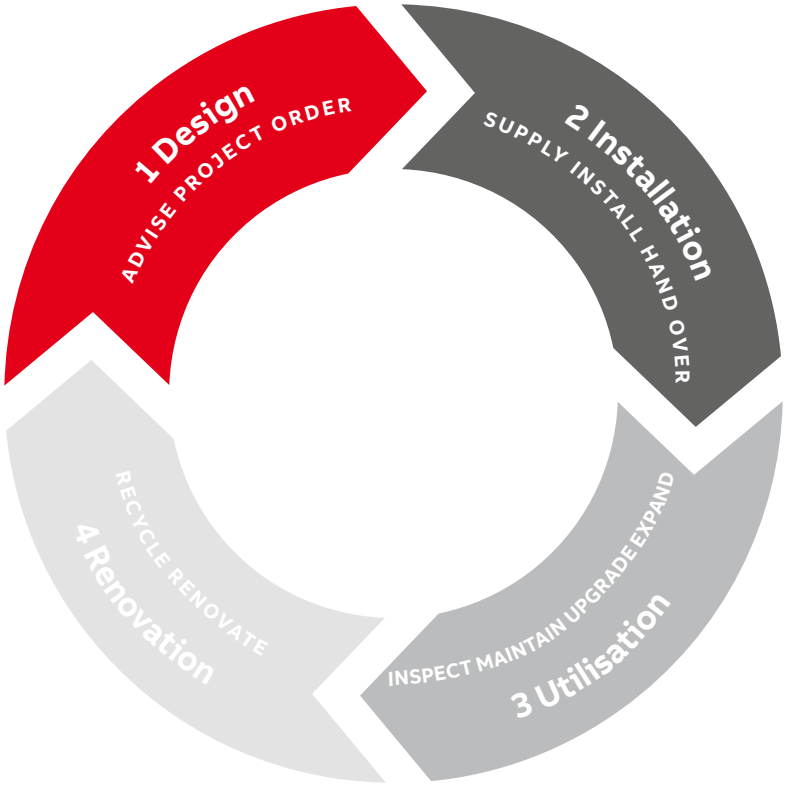

Support during the utilisation phase
During the utilisation phase, we can advise on your emergency lighting installation and make sure it is aligned with the latest standards. That way, you guarantee optimal safety at minimum utilisation costs, thanks to low energy consumption and easy-to-replace parts and, if necessary, the people who are working, shopping, relaxing or sleeping in the building can quickly and safely find their way out.

Altering and separating during the renovation phase
The new generation of emergency lighting products is ready for the renovation phase. We go further than the normal use of durable, environmentally-friendly, recyclable materials. The products are easy to disassemble and easy to dispose of separately in the legally required return and recycling flows. It is also easy to alter the new generation of luminaires using the individual modules.

Emergency lighting process
With you every step

During building construction or refurbishment, the focus for emergency lighting shifts from planning and design, to delivery and installation.
We provide solutions that impact at all points of the emergency lighting life-cycle.

—
01 Easy-to-install product range

Easy-to-install product range
Many of our products are engineered to a modular design format, which promotes straightforward, cost-effective installation and maintenance.

Modular design enables First-Fix installation of the key wiring components with later connection of geartrays, diffusers and legends etc, for easy management and replacement of parts.

—
02 Certified technical design

Certified technical design
Central to emergency lighting is the technical design drawing. It defines luminaire positioning and spacing, drives the installation effort and provides the key control for commissioning and approval.

Our technical design team is on hand to advise and assist with design drawings for all types of emergency lighting system, to the latest relevant standards, with full certification for added confidence and peace of mind.

—
03 Project support

Project support
Our project engineers and internal sales support teams are available to provide guidance on products and project updates/delivery schedules etc. This catalogue makes for a great starting point when considering emergency lighting, but is only a small part of our service.

—
04 Project consultation

Project consultation
You can count on us to help with your emergency lighting planning. We offer expert assistance in emergency lighting scheme design, as well as clear, concise advice on product selection. Our dedicated team are able to assist you at your premises, and arrange for emergency lighting schemes to be prepared at our design office.

—
05

—
05 Easy-to-install product range

The purpose of an emergency lighting system is to protect and safeguard life. Once commissioned and in operation, the emergency lighting system must function correctly throughout its lifetime and therefore requires ongoing management, maintenance and testing.

Standards and legislation
The need for testing and servicing is enforced by legislation.

Any faults found need to be rectified as quickly as possible. For many building owners/occupiers, who have legal responsibility for these systems, maintenance, testing and access to replacement parts are of paramount importance. With this in mind, it's clear to see that maintaining the partnership with your emergency lighting supplier, even after commissioning, is highly important.

Our fully certified engineering team can provide, support and advice on maintenance and servicing of emergency lighting.

Maintenance & servicing
Our team of qualified and experienced service engineers are available to service emergency lighting systems and to ensure full working order.

System testing & upgrades
Owner/occupiers are legally obliged to test and maintain emergency lighting.

ABB manufactures a range of testing solutions for self-contained emergency lighting - self-test, NaveoPro wired, NaveoPro wireless, viaFlex and Emex test addressable testing - to accommodate all levels of testing requirement.

Emergency lighting portfolio

Standards

Countries	Standards EU	Standards & Guidance	Certifications	Brand	Page
FR, AL	EN 60598-1 EN 60598-2-22 EN 1838 EN 50171 EN 50172 (HD) IEC 60364-5-56 EN IEC 62485-2 EN 62034 EN-ISO 7010	NF C 71-801 NF C 71-802 NF C 71-803 NF C 71-804 NF C 71-805 NF C 71-820 NF C 71-830	NF AEAS NF performance SATI NF environnement	Kaufel	16/8, 16/9
UK, IE **MEA: AE, QA, SA, OM, BH, EG, IN, ZA**		BS 5266 , NFPA101	Kitemark ENEC, IECEE CB, SASO, SABER, UAE COC	Emergi-Lite	16/12, 16/13
DE, A, CH		DIN VDE V 0108-100-1 DIN VDE 0100-560 DIN ISO 3864-1 DIN 4844-1	ENEC (state of the art, but not an absolute must)	Kaufel & ABB	16/6 to 16/9
NL		Bouwbestluit (law) ARBO wet (law) NEN 1010 NEN 3011 NEN 2443	ENEC	VanLien	16/10, 16/11
BE, LU		Koninklijk besluit (law) ARAB (law) NBN-C71-100	ENEC Lastenboek 400 (LB400)	VanLien	16/10, 16/11
NEU: SE, DK, FI, NO, ES				ABB	16/6, 16/7
CEU: BG, HU, CZ, LT, MD				ABB	16/6, 16/7
MED: SP, IT, TR, PT				ABB	16/6, 16/7

Emergency lighting portfolio
Standards

Countries	Standards	Certifications	Brand	Page
US	UL 924	UL	Emergi-Lite Lightalarms	16/16, 16/17
CA	CSA C22.2 No. 141	CSA cUL	Emergi-Lite Lumacell Ready-Lite	16/18, 16/19
AU, NZ	AS/NZS 2293.2 AS/NZS 2293.1 AS/NZS 2293.3 AS/NZS 60598.1 AS/NZS 60598.2.22 CISPR 15	SAA	Stanilite	16/20 to 16/25
ASIA: SG, TH	AS/NZS 2293.2 AS/NZS 2293.1 AS/NZS 2293.3 AS/NZS 60598.1 AS/NZS 60598.2.22 CISPR 15	UL	Stanilite	16/20 to 16/25
CN		CCCF for China	ABB	

Emergency lighting portfolio

Emergi-Lite & Lightalarms - USA

Range Emergi-Lite	**Prestige edglit**	**Preceptor**	**Premier Exit**	**Premier Combo**	**ELX**	**ELXN400-LED**	**Survive-All SVX**	
Range Lightalarms	**Simplicity premium**	**Galaxy**	**Grande Exit**	**Grande Combo**	**QLX & QLXN**	**UQLXN**	**Severe XV & XVE**	
Type of projects	Architectural	Architectural	Commercial	Commercial	Distributor Select	Distributor Select	Industrial	
	Self-powered, AC only, AC/DC	Self-powered, AC only, AC/DC	Self-Powered / AC-Only & AC/DC	Self-Powered	Self-Powered / AC-Only	Self-Powered	Self-Powered / AC-Only & AC/DC	

Technologies										
NexusPro (NAM)		■	■		■				■	
Self Test	■	■	■		■	■		■	■	
Standard	■	■	■		■	■		■	■	

Functions										
Escape route signage	■	■	■	■	■	■	■	■	■	■
Escape route lighting					■			■		
Damp Location			■	■	■	■	■	■	■	■
Cold Temperature									■	
Power over Ethernet										
California Energy Commision Title 20	■		■	■					■	■

Indexes of protection										
NSF									■	■
NEMA 4X									■	■
Certification	UL	UL	UL	UL	UL	UL	UL	UL	UL	UL

	Survive-All SVX Combo	**Luxray**	**Mini-Inverter**	**RA**		**Premier Compact**	**EL-2LED**	**Survive-All SV**
	Severe XVE Combo	**Camray**	**Mini-Inverter**	**RP**		**Grande Compact**	**LCA-2LEDR**	**Severe V**
	Industrial	Architectural	Architectural	Architectural		Commercial	Distributor Select	Industrial
	Self-Powered	Self-powered, remote	Self-powered	Self-Powered	Remote	Self-Powered	Self-Powered	Self-Powered
	■		■	■		■		■
	■	■	■	■		■	■	■
	■	■		■		■	■	■
	■							
	■	■	■	■	■	■	■	■
	■	■		■	■	■	■	■
	■	■						■
				■				
			■	■		■	■	■
	■			■	■			■
	■							■
	UL	UL	UL	UL	UL	UL	UL	UL

Emergency lighting portfolio

Emergi-Lite, Lumacell & Ready-Lite - CAN

Range Emergi-Lite	**EDE**	**ED**	**ES**	**ESC**	**CMPS-E**	**CMPC-E**	
Range Lumacell	**LDE**	**LD**	**LS**	**LSC**	**CMPS-L**	**CMPC-L**	
Range Ready-Lite	**RDE**	**RD**	**RS**	**RSC**	**CMPS-RL**	**CMPC-RL**	
Type of projects	Architectural	Architectural	Commercial	Commercial	Distributor Select	Distributor Select	
	Self-powered, AC only, AC/DC	Self-powered, AC only, AC/DC	Self-Powered	AC-Only & AC/DC	Self-Powered	Self-Powered	AC-Only	Self-Powered	
Technologies									
NexusPro (NAM)			■		■				
Self Test	■	■			■				
Standard	■	■	■		■	■		■	
Functions									
Escape route signage	■	■	■	■	■	■	■	■	
Escape route lighting					■			■	
Cold Temperature									
Power over Ethernet									
Indexes of protection									
NSF									
NEMA 4X									
Certification	CSA	CSA	CSA	CSA	CSA	CSA	CSA	CSA	

	Survive-All EN		**CMP Survive-All ENC C-E**	**ERAU & ERAUR**		**Retractalite**	**Mini-Inverter**	**CM-SB**	**JMC & JMLC**	**Survive-All NXM**
	LN		**LNC**	**LRAU & LRAUR**		**Phantom**	**Mini-Inverter**	**CM-SB**	**RC & RGC**	**RG-NX**
	RN		**RNC**	**RRAU & RRAUR**		**Invisilite**	**Mini-Inverter**	**CM-SB**	**LDC & LDXC**	**TUF-NM**
	Industrial		Industrial	Architectural		Architectural	Architectural	Distributor Select	Commercial	Industrial
	Self-Powered	AC-Only & AC/DC	Self-Powered	Self-Powered	Remote	Self-powered, remote	Self-powered	Self-Powered	Self-Powered	Self-Powered
	■		■	■			■		■	■
	■		■	■		■	■		■	■
	■		■	■				■	■	■
	■	■	■							
			■	■		■	■	■	■	■
	■	■	■							■
				■						
	■	■	■	■	■					■
	■	■	■							■
	CSA	CSA	CSA	cUL	cUL	CSA	cUL	CSA	CSA	CSA

Emergency lighting portfolio

Emergi-Lite - UK-MEA

Range	Guideway		Horizon		Silver Scape		Navigator Compact		Day-Lite Ex-Cel	
	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire
Type of projects	Architectural		Commercial		Commercial		Commercial		Commercial	
Technologies										
Naveo®Pro wired (Europe)	■		■		■		■		■	
Naveo®Pro wireless (Europe)	■				■				■	
Self Test	■		■		■		■		■	
DALI	■									
Standard		■		■		■		■		■
Emex Test		■		■		■		■		■
Functions										
Exit sign	■	■	■	■	■	■	■	■	■	■
General lighting										
Escape route					■	■			■	■
Open area					■	■			■	■
Degree of protection										
IP	IP20		IP20 / IP40		IP20		IP20		IP65	
IK										
Certifications										
ENEC Dekra	■		■		■		■			
ENEC LCIE BV										
BSI KM			■			■		■	■	
BSI ENEC										
IECEE CB	■		■		■		■		■	
NFPA101										

									
	Day-Lite Ex-Cel		**Ovano**	**Movion**		**Optima**	**Primevo**	**Primevo Twinspot**
	Self-contained	CPS Luminaire	Self-contained	Self-contained	CPS Luminaire	CPS Luminaire	Self-contained	
	Commercial		Commercial	Commercial		Commercial	Distributor select	
	■			■				
	■			■				
	■			■			■	
			■	■				
		■			■		■	
		■			■	■		
	■	■	■			■	■	
						■		
	■	■	■	■	■	■	■	
	■	■	■	■	■	■	■	
	IP65		IP20	IP20/ IP40/ IP42		IP65	IP20 / IP65	IP20
						IK10	IK04 / IK10	
	■			■		■		
							■	
		■						
	■			■		■		
						Compliant		

Emergency lighting portfolio

Emergi-Lite - UK-MEA

Range	**Aqualux**		**Indulux**		**InduXEL222**	**InduXEL121**	**Weatherforce**		
	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	Self-contained	Self-contained	CPS Luminaire	
Type of projects	Industrial		Industrial		Industrial	Industrial	Industrial/ Commercial		
Technologies									
Naveo®Pro wired (Europe)	■		■		■		■		
Naveo®Pro wireless (Europe)	■		■				■		
Self Test	■		■		■	■	■		
DALI	■						■		
Standard		■		■				■	
Emex Test		■		■				■	
Functions									
Exit sign	■	■	■	■			■	■	
General lighting					■	■			
Escape route	■	■	■	■	■	■	■	■	
Open area	■	■	■	■			■	■	
Degree of protection									
IP	IP20/ IP42/ IP65/ IP67		IP68		IP65	IP66	IP65		
IK	IK10		IK10		IK07	IK10			
Certifications									
ENEC Dekra	■				■		■		
ENEC LCIE BV					■				
BSI KM								■	
BSI ENEC									
IECEE CB	■				■		■		

	Serenga 2		**Hyled**		**Camarque**		**Cordona**		**Lutia**	
	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire
	Architectural		Architectural		Commercial		Commercial		Industrial	
	■		■		■		■		■	
	■		■				■		■	
	■		■		■		■		■	
	■		■				■		■	
		■		■		■		■		■
		■		■		■		■		■
					■	■	■	■	■	■
	■	■	■	■	■	■	■	■	■	■
	■	■	■	■	■	■	■	■	■	■
	IP42 / IP54		IP65		IP20		IP65		IP65	
			IK10						IK10	
	■		■		■		■		■	
			■							
						■		■		
	■		■		■		■		■	

Emergency lighting portfolio

VanLien - BE-NL-LU

Range	**Evago**		**Serenga**		**Optilux / Horizon**		**Previx**		**Solo**	**Movion**		
	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	Self-contained	CPS Luminaire	
Type of projects	Architectural		Architectural		Commercial		Commercial		Distributor select	Distributor select		
Technologies												
Naveo®Pro wired (Europe)	■		■		■		■			■		
Naveo®Pro wireless (Europe)	■									■		
Self Test	■		■		■		■		■	■		
DALI	■		■							■		
Standard		■		■		■		■			■	
FLX		■		■		■		■			■	
Functions												
Escape route signage	■	■	■	■	■	■	■	■		IP20/ IP40/ IP42		
Escape route lighting	■	■			■	■	■	■	■	IK04		
Degree of protection												
IP	IP40/ IP42/ IP54		IP20		IP40/ IP20		IP40		IP54	IP20/ IP40/ IP42		
IK										IK04		

	Aqualux		**Indulux**		**InduXEL222**	**Lutia**		**Decoled**		**Hiled**	
	Self-contained	CPS uminaire	Self-contained	CPS Luminaire	Self-contained	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS uminaire
	Industrial		Industrial		Industrial	Architectural		Commercial		Industrial	
	■		■		■	■		■		■	
	■		■			■		■		■	
	■		■		■	■		■		■	
	■					■				■	
		■		■			■		■		■
		■		■			■		■		■
	■	■	■	■	■						
	■	■	■	■	■	■	■	■	■	■	■
	IP67/ IP65		IP 68		IP65	IP65		IP65		IP65	
	IK10		IK10		IK07	IK10		IK10		IK8	

Emergency lighting portfolio

Kaufel - DE

Range	**Primora**		**Serenga2**		**Serenga**		**Optilux**		**Movion**		**Optima 10**	
	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire
Type of projects	Architectural		Architectural		Architectural		Commercial		Commercial		Commercial	
Technologies												
Naveo®Pro wired (Europe)	■		■		■		■		■			
NaveoPro wireless (Europe)	■		■						■			
Self Test	■		■		■		■		■		■	
DALI	■		■		■				■			
Standard		■		■		■		■		■		■
FLX		■		■		■		■		■		■
Functions												
Escape route signage	■	■			■	■	■	■	■	■	■	■
Escape route lighting			■	■					■	■		
Degree of protection												
IP	IP40		IP42 / IP54		IP20		IP20		IP20 / IP40 / IP42		IP43	
IK									IK04			

													
	Optima 11		**Ovano**		**Aqualux**		**Indulux**		**InduXEL222**	**Lutia**		**Altolux**	
	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire
	Commercial		Commercial		Industrial		Industrial / Commercial		Industrial	Industrial		Industrial / Commercial	
	■				■	■	■		■	■		■	
					■		■			■		■	
	■				■		■		■	■		■	
			■		■		■			■		■	
		■				■		■			■		■
		■				■		■			■		■
	■	■	■		■	■	■	■	■				
	■	■	■		■	■	■	■	■	■	■	■	■
	IP42 / IP65		IP20		IP65		IP68		IP65	IP65		IP65	
	IK10				IK10		IK10		IK07	IK10		IK08	

Emergency lighting portfolio

Kaufel - FR

Range	**BrioSpot**		**Brio+**		**Primo3**		**PrimEvo**	**Indulux**		
	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	CPS Luminaire	Self-contained	Self-contained	CPS Luminaire	
Type of projects	Architectural		Commercial		Commercial		Distribution select	Industrial		
Technologies										
Naveo®Pro wired (Europe)	■		■	■				■	■	
Self Test	■		■		■		■	■		
Standard										
Conventionnel		■		■		■			■	
Functions										
Escape route signage	■	■	■	■	■	■	■	■	■	
Escape route lighting	■	■	■	■	■	■		■	■	
Sleeping area	■		■		■					
Housing			■		■		■			
Handicap	■		■		■					
Lighting device			■							
Degree of protection										
Not Waterproof	IP 43 / IK 04 IP 43 / IK 08		IP 42 / IK 07		IP42 / IK07 IP 42 / IK 10		IP 42 / IK 10			
Waterproof			IP 65 / IK 10		IP 65 / IK 10		IP 65 / IK 10	IP 65 / IK 10		

	InduXEL222	**InduXEL121**	**Altiled**		**BSL+**	**Réglettes**	**EDF**	**DuoCompact**	**Duophare**
	Self-contained	Self-contained	Self-contained	CPS Luminaire	CPS Luminaire	CPS Luminaire	Self-contained	Self-contained	CPS Luminaire
	Industrial	Industrial	Architectural		Commercial	Distribution select	Industrial	Industrial	Industrial
	■		■	■				■	
	■	■	■					■	
							■		
				■	■	■			■
	■	■			■				
	■	■	■	■		■	■	■	■
	IP65	IP66				IP 42 / IK 04	IP 42 / IK10		
	IK07	IK10	IP 65 / IK08		IP 68 / IK 10		IP 65 / IK10	IP 65 / IK08	IP 65 / IK08

Emergency lighting portfolio

ABB - EN1838

Range	**Guideway**	**Ovano**	**Movion**	**PrimEvo**	
	Self-contained	Self-contained	Self-contained	Self-contained	
Type of projects	Architectural	Commercial	Commercial	Distributor select	
Technologies					
Naveo®Pro wired (Europe)	■		■		
Naveo®Pro wireless (Europe)	■		■		
Self Test			■	■	
DALI	■	■	■		
Functions					
Escape route signage	■	■	■	■	
Escape route lighting		■	■	■	
Degree of protection					
IP	IP40	IP20	IP20/ IP40/ IP42	IP20/ IP65	
IK				IK10	

	Optima 350	**Nel-3**	**Aqualux**	**Serenga 2**
	Self-contained	Self-contained	Self-contained	Self-contained
	Distributor select	Distributor select	Industrial	Architectural

			■	■
			■	■
	■	■		
			■	■

	■	■	■	
	■		■	■

	IP42/ IP65	IP54	IP67	IP42/ IP54
	IK10		IK10	

Emergency lighting portfolio

ABB - EN1838

Range	**Cordona**	**Lutia**	**Day-Lite Ex-Cel**	**SilverScape**	
	Self-contained	Self-contained	Self-contained	Self-contained	
Type of projects	Commercial	Industrial	Commercial	Commercial	
Technologies					
Naveo®Pro wired (Europe)	■	■	■	■	
Naveo®Pro wireless (Europe)	■	■	■	■	
Self Test	■	■	■	■	
DALI	■	■			
Functions					
Escape route signage			■	■	
Escape route lighting	■	■	■	■	
Degree of protection					
IP	IP65	IP65	IP65	IP20	
IK		IK10			

	Weatherforce	**Altiled - Hyled**	**Indulux**	**InduXEL222**
	Self-contained	Self-contained	Self-contained	Self-contained
	Industrial / Commercial	Industrial / Commercial	Industrial / Commercial	Industrial

	■	■	■	■
	■	■	■	
	■	■	■	■
	■	■		

	■		■	■
	■	■	■	■

	IP65	IP65	IP68	IP65
		IK08	IK10	IK07

Emergency lighting portfolio

Stanilite - AU-NZ

					
Range	**Platinum exit LED Evago**	**Platinum exit LED Evago Theatre Mask**	**Platinum exit LED Edgelit recessed, original style square diffuser / Theatre Mask**	**Platinum exit LED Quickfit / Quickfit Theatre Mask**	
	Self contained	Self contained	Self contained	Self contained	
Type of projects	Architectural	Architectural	Architectural	Commercial	
Technologies					
Nexus RF Infinity	■	■	■	■	
Single Point Unit	■	■	■	■	
DALI			■	■	
Nexus LX			■	■	
Functions					
Exit sign	■	■	■	■	
Escape route lighting					
Degree of protection					
Degree of protection	IP 20	IP 20	IP 20	IP 20 / IP65	

	Platinum exit LED Edgelit Quickfit / Recessed	**Platinum exit LED Weatherproof**	**Platinum exit LED Quickfit Vandal Resistant**	**Platinum exit LED Quickfit Jumbo**	**Platinum exit LED Jumbo**
	Self contained	Self contained	Self contained	Self contained	Self contained
	Commercial	Commercial	Industrial	Industrial	Industrial
	■	■	■	■	■
	■	■	■	■	■
	■				
	■	■	■	■	■
	■	■	■	■	■
	IP 20	IP 65	IP 20 / IK 10	IP 20	IP 20

Emergency lighting portfolio

Stanilite - AU-NZ

Range	**Economy Exit LED (wall mount, slide connect, ceiling mount)**	**Platinum exit LED Jumbo weatherproof**	**Platinum Spitfire LED (recessed non-maintained)**	**Platinum Spitfire LED**	
	Self contained	Self contained	Self contained	Self contained	
Type of projects	Distributor select	Industrial	Commercial	Commercial	
Technologies					
Nexus RF Infinity		■	■	■	
Single Point Unit	■	■	■	■	
DALI			■		
Nexus LX		■	■	■	
Functions					
Exit sign	■	■			
Escape route lighting			■	■	
Degree of protection					
Degree of protection	IP 20	IP 65	IP 20	IP 20	

	Platinum Spitfire LED (weatherproof non-maintained)	**Platinum Batten LED - 4 foot**	**Platinum Batten LED weatherproof - 2 foot**	**Platinum Batten LED weatherproof - 4 foot**	**Platinum Batten LED weatherproof - 5 foot**
	Self contained	Self contained	Self contained	Self contained	Self contained
	Commercial	Commercial	Commercial	Commercial	Commercial
	■	■	■	■	■
	■	■	■	■	■
		■			
	■	■	■	■	■
	■	■	■	■	■
	IP 67	IP 40 / IK 06	IP 65 / IK 08	IP 65 / IK 08	IP 65 / IK 08

Emergency lighting portfolio

Stanilite - AU-NZ

Range	**Platinum Batten LED Vandal proof IK10 Nexus - 2 foot**	**Platinum Flood light LED weatherproof**	**Platinum Circular LED weatherproof**	**Economy Exit LED (base)**	
	Self contained	Self contained	Self contained	Self contained	
Type of projects	**Commercial**	**Commercial**	**Commercial**	**Distributor select**	
Technologies					
Nexus RF Infinity	■	■	■		
Single Point Unit	■	■	■	■	
DALI					
Nexus LX	■	■	■		
Functions					
Exit sign					
Escape route lighting	■	■	■		
Degree of protection					
Degree of protection	IP 20 / IK 10	IP 65	IP 65 / IK 08	IP 20	

	Economy Spitfire LED (recessed)	**Economy Spitfire LED (surface)**	**ECO Flood Light LED weatherproof**	**Economy Batten LED - 4 foot**	**Economy e-Luna Circular LED**
	Self contained	Self contained	Self contained	Self contained	Self contained
	Distributor select	**Distributor select**	**Distributor select**	**Distributor select**	**Distributor select**
	■	■	■	■	■
	■	■	■	■	■
	IP 20	IP 54	IP 65	IP 40 / IK06	IP 20

Emergency lighting portfolio

ABB - China

Range	**5W Downlight**	**5W Ceiling Mounted**	**5W Ceiling Mounted**	
	CPS /Slave	CPS /Slave	CPS /Slave	
Type of projects	**Commercial**	**Commercial**	**Commercial**	
Technologies				
XXX	Two-bus communication	Two-bus communication	Two-bus communication	
Functions				
Exit sign				
Escape route	■	■	■	
Open area/General lighting	■	■	■	
Indication buried lights				
Degree of protection				
Degree of protection	IP30	IP30	IP30	
Certifications				
GB 17945-2010				

					
	12W Ceiling Mounted	**5W Wall Mounted**	**9W Ceiling Mounted**	**Marker Lights - Ground Two-Way**	**Marker Exit Lights - wall Ceiling - Multiple version /direction**
	CPS /Slave	CPS /Slave	CPS /Slave	CPS /Slave	CPS /Slave
	Commercial	**Commercial**	**Commercial**	**Commercial**	**Commercial**
	Two-bus communication	Two-bus communication	Two-bus communication	Two-bus communication	Two-bus communication
					■
	■	■	■		
	■	■	■		
				■	
	IP30	IP30	IP31	IP32	IP33
				■	

Emergency lighting portfolio

Central Battery Systems including Inverters

Emergi-Lite, Lumacell, Ready-Lite, Lightalarms - North America

	Mini Inverter Series						
Range	**Low-Capacity**	**Medium-Capacity**				**High-Capacity**	
Power rating	32W & 55W	125W	250W	400W	720W	1000W	
Autonomy	90 min.	90 min.	90 min.	90 min.	90 min.	90 min.	
AC/DC or DC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	
Input voltage	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	
Output voltage	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	
Technologies							
Communication Typeluminaires							
Controls& communication type external							
Certifications							
Standards	U.L.924	U.L.924	U.L.924	U.L.924	U.L.924	U.L.924	
Mounting	Floor	Floor	Floor	Floor	Floor	Floor	
User interface (touch screen)							
Degrees of protection							
IP	Nema 1	Nema 1	Nema 1	Nema 1	Nema 1	Nema 1	
Brand & region							
USA	■	■	■	■	■	■	
Canada							

		Central Battery System						
	High-Capacity	**FTEM series**	**FTE series**	**EIPS single phase series**	**3FTC three phase series**	**FTC3R and 3FTC3R**	**Inverter series IPS Single phase 3KVA - 15KVA**	**Inverter series IPS Three phase 4.5KVA - 54KVA**
	1500W	1.0KW - 2.8KW	1.5KW - 16.7KW	1.5KW - 16.7KW	4.8KW - 50.0KW	3.0KW - 8.0KW	3KW - 15KW	4.5KW - 54KW
	90 min.	90 min.	90 min.	90 min.	90 min.	90 min.	30 minutes	30 minutes
	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC	AC/DC
	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	120/208VAC, 60HZ	120, 120/208VAC, 60HZ	120/347Vac, 60HZ	120/347Vac, 60HZ
	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	120/277VAC, 60HZ	120/208VAC, 60HZ	120, 120/208VAC, 60HZ	120/347Vac, 60HZ	120/347Vac, 60HZ
		Modbus / BACnet	Modbus / BACnet	Modbus / BACnet	Modbus / BACnet	Modbus / BACnet	Modbus / BACnet	Modbus / BACnet
	U.L.924	U.L.924	U.L.924	U.L.924	U.L.924	U.L.924	C22.2 No.141-15	C22.2 No.141-15
	Floor	Floor	Floor	Floor	Floor	Floor		
		Touch screen display	Touch screen display	Touch screen display	Touch screen display	Touch screen display	Touch screen display	Touch screen display
	Nema 1	Nema 1	Nema 1	Nema 1	Nema 1	Nema 3R		
	■	■	■	■	■	■		

Emergency lighting portfolio

ABB - Central power supply systems

	Emergilite	Emergilite	Emergilite	Emergilite	Kaufel	
Range	**EMEX Power EMEX 230 & EMEX 400**	**EMEX Power EMEX 220**	**EMEX Mini**	**EMEX 110**	**via Flex CPS**	
Power rating	1.5KVA-81KVA	1-20KW	1.5KVA	1KW-15KW	3.2kW/3 hours or max. 8.5kW/1 hour Higher ratings available on request	
Autonomy	60,120,180 mins	90 & 180 mins	60,120,180 mins	60,120,180 mins	60,120,180 mins	
AC/DC or DC/DC	AC/AC	AC/DC	AC/AC	AC/DC	AC/DC	
Input voltage	230/400V AC 50 & 60Hz	230V 50&60Hz	230V AC 50 & 60Hz	230/400V AC 50 & 60Hz	230/400V AC 50Hz	
Output Voltage	230/400V AC	230V/220V AC/DC	230V AC	110V AC/DC	220V DC	
Technologies						
Communication type luminaires	Power Line (LTC module)	Power Line (LTC module)	Power Line (LTC)	-	Power Line (FLX module)	
Controls & Communication type external	EMEX Test, BACnet	EMEX Test, BACnet	EMEX Test, BACnet		viaFlex Pro, viaFlex Senso	
Certifications						
Standards	Certified	Certified	Certified	Certified	Certified	
	BSI- BSEN50171:2001, BSEN 61508, IEC62477	BSI- BSEN50171:2001, BSEN 61508, IEC62477	BSI- BSEN50171:2001, BSEN 61508, IEC62477	BSI- BSEN50171:2001, BSEN 61508, IEC62477	DIN EN 50171:2001-11	
Mounting	Floor	Floor	Floor	Floor	Floor	
User Interface (touch screen)	8" Touch Screen Display, (Option) LCD meters and LED indications	8" Touch Screen Display, (Option) LCD meters and LED indications	8" Touch Screen Display, (Option) LED indications	LCD meters and LED indications	8" Touch Screen Display	
Degree of protection						
IP	IP31	P31	IP2X	IP31	IP2X	
Brand & Region						
VanLien NL,BE, LUX, Nord	■	■	■		■	
Kaufel FR						
Emergilite UK, IRE, MEA, (BS territories)	■	■	■	■		
Kaufel DE, Dach					■	
ABB China						

	Kaufel	VanLien	Kaufel	Kaufel	ABB China
	via Flex LPS	**24 SVK**	**SCA**	**SCB**	**LH series**
		150W to 1200W	250VA - 7.5KVA	80W - 6KW	300W -1KW
	60,120,180 mins	60,180 mins	**60 mins**	**60 mins**	**90, 180 minutes**
	AC/DC	AC/DC	AC/AC	AC/DC	**AC/DC**
	230/400V AC 50Hz	230V AC 50Hz	230V AC 50Hz	230V AC 50Hz	**AC220V, 50Hz**
	220V DC	24V DC	220/230V AC	24V,48V,110V DC	**36V DC**
	Power Line (FLX module)	Circuit monitoring	Naveo Pro	Naveo Pro	Two-bus communication
	viaFlex Pro, viaFlex Senso		Surv'Eye box, optional Supervisor, optional GSM-SC communicator to SMS	Surv'Eye box, optional Supervisor, optional GSM-SC communicator to SMS	**CAN bus**
	Certified	Certified	Certified	Certified	
	DIN EN 50171:2001-12	DIN EN 50171:2001-11	- NF C 15-100 - NF EN 500091-1 (ED1993) - NF C 71-815 - NF EN 50-171	- NF C 15-100 - NF EN 500091-1 (ED1993) - NF C 71-815 - NF EN 50-171	Executive standard GB17945-2010
	Wall	Floor	Floor	Floor	Floor-standing & Wall-mounted
	8" Touch Screen Display	LCD Displays and LED indications	Display LCD	Display LCD	17 inches LCD screen 1280x1080
	IP2X	IP2X	IP2X	IP2X	IP33
	■	■			
			■	■	
	■				
					■

Nexus®Pro products

Intelligent monitoring management system - USA

EXIT SIGNS

Galaxy™ XD, XDN Series

Grande™ Combination Series

Grande™ Exit Series

Severe™ XV XVE Series

Severe™ XV12E & XV24E Combination Series

Severe™ XVHZ, XVEHZ Series

Severe™ XVH & XVH12N Combination Series

MINI INVERTER SYSTEMS

1500W High-Capacity Mini Inverter Series

1000W High-Capacity Mini Inverter Series

720W Medium-Capacity Mini Inverter Series

400W Medium-Capacity Mini Inverter Series

250W Medium-Capacity Mini Inverter Series

125W Medium-Capacity Mini Inverter Series

BATTERY UNITS

RP Series

MG/MN-SP SERIES

Thermoplastic Grande™ Compact Series

MG & MN Series

Severe™ V Series NEMA-4X & NSF Rated

High Performance SP Series

Severe™ VH Series

COMING SOON

MONITORING SYSTEMS

NexusPro Gateway

Nexus®RF products

Intelligent monitoring management system - USA

EXIT SIGNS

NYC Approved Genesis™ GX & GXE Series

Galaxy™ XD, XDN Series

Genesis™ GX & GXE series

Severe™ XV, XVE Series

Severe™ XVHZ, XVEHZ Series

NYC Approved - Severe™ XV & XVE Series

Simplicity™ Premium SLED, SPLED Series

Grande™ Combination Series

Severe™ XV12E & XV24E Combination Series

NYC Approved - Simplicity™ Premium SL...

UX4 LED Steel Exit and Combination

Grande™ Exit Series

Severe™ XVH & XVH12N Combination Series

MINI INVERTER SYSTEMS

1500W High-Capacity Mini Inverter Series

1000W High-Capacity Mini Inverter Series

720W Medium-Capacity Mini Inverter Series

400W Medium-Capacity Mini Inverter Series

NYC Approved 1000W Capacity Mini Inverter Series

NYC Approved 125W, 250W, 400W or 720W Mini Inverter Series

250W Medium-Capacity Mini Inverter Series

125W Medium-Capacity Mini Inverter Series

Nexus®RF products

Intelligent monitoring management system - USA

BATTERY UNITS

MG/MN-SP SERIES

SPH Series

Thermoplastic Grande™ Compact Serie

MG/MN-SP SERIES

Protector™ Series Ideal for spaces that require a self-contained

NYC Approved - MG & MN Series

NYC Approved - TBR Series

Severe™ V Series NEMA-4X & NSF Rated

TBR Series

NYC Approved - PG & P12G Series

MG & MN Series

High Performance SP Series

NYC Approved - PQ & P12Q Series

PG, PQ, P12G & P12Q Series

Grande™ Battery Series

MONITORING SYSTEMS

Nexus® RF Repeater

Nexus® RF Area Controller Router V2

Nexus®Pro products

Intelligent monitoring management system - CAN

PICTOGRAM SIGNS

EN Series

ENC Series

ES Series

ESC Series

EH Series

COMING SOON

EHC Series

COMING SOON

CENTRAL SYSTEMS

Mini Inverter Series

1440W/60ms High-Capacity Mini Inverter Series

1440W High-Capacity Mini Inverter Series

1000W /60ms High-Capacity Mini Inverter Series

1000W High-Capacity Mini Inverter Series

600W Medium-Capacity Mini Inverter Series

300W Medium-Capacity Mini Inverter Series

BATTERY UNITS

Distinction Series

EHP Series

ERAU Series

ESL Series

JMC Series

Survive-All NXM Series

Severe™ VH Series

COMING SOON

MONITORING SYSTEMS

Mini Inverter Series

Nexus®RF products

Intelligent monitoring management system - CAN

EXIT & BILINGUAL SIGNS

EX10-P & LPEX10-P Series

EX30 Series

EXHZ Series

LPEXHZ Series

Premier™ Series

Premier™ Series Combo Unit

Survive-All™ LPEX600 Series

Survive-All™ LPEX600-N Series

EXIT & BILINGUAL SIGNS

DEL Series

Distinction Series

EHP Series

EHZ Series

ESL HP Series

ESL Series

ESLNX Series

ESLT Series

HZM Series

JMLA Series

JMLC Series

MPRE Series

Premier™ Series

Provider™ Series

Survive-All NXM Series

CENTRAL SYSTEMS

Mini Inverter Series

1440W/60ms High-Capacity Mini Inverter Series

1440W High-Capacity Mini Inverter Series

1000W /60ms High-Capacity Mini Inverter Series

1000W High-Capacity Mini Inverter Series

600W Medium-Capacity Mini Inverter Series

300W Medium-Capacity Mini Inverter Series

Nexus®RF products

Intelligent monitoring management system - CAN

PICTOGRAM SIGNS

EA Series

EAC Series

ED Series

EDE Series

EH Series

EHC Series

EN Series

ENC Series

ESC Series

Premier Series

"SORTIE" SIGN

C8SR50-P Series

SR Series

MONITORING SYSTEMS

Nexus® RF Repeater

Nexus® Area Controller Router

—
Emergency lighting device installed in a modern office

Monitoring and testing
Be prepared for an emergency

Emergency lighting installations must be monitored and tested regularly to ensure they can save lives of building occupants in the event an emergency occurs.

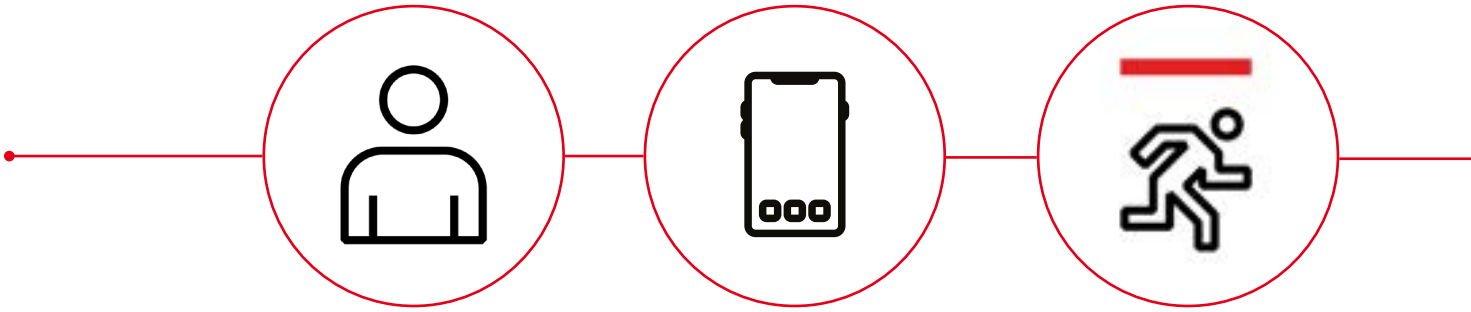

Through intelligent emergency lighting, ABB makes building safety more accessible than ever. With action needing to be taken in a moment's notice during an emergency, functional emergency lighting can mean the difference between getting out of a building safely or struggling to find the closest exit.

To assure safety of public facilities, code and regulation compliance ensures the functionality of emergency lighting, so devices automatically switch on during a power failure. This is implemented by International and North American organizations like the National Fire Protection Association (NFPA) and International Code Council (ICC) which release editions of their code that govern public health and safety.

These organizations establish mandates in which fixtures should be tested every month and year, each fixture is maintained, defective components are replaced, and devices are code compliant.

Nexus®Pro
Solution and benefits

Nexus®Pro is designed to enable building owners and managers to easily maintain and test emergency lighting, without the need to visually verify performance or disrupt the power supply.

With digital solutions, building owners now can have peace of mind knowing their buildings are safer than ever. All operations can be managed remotely, giving building owners and managers complete control wherever they are, whenever they need it most while preventing any human error in the process.

Cost effective
- Reduce labour costs for maintaining emergency lighting
- Saving on cost and labour on manual collection and recording of emergency lighting data
- 200 emergency lighting units on one gateway
- Reduce Monitoring costs by simply receiving notification once there is defective device

User friendly
- Monitor remotely anywhere at anytime
- Fast and easy testing with a smart device
- Interactive 2D floor plan layout showcasing emergency lighting positioning
- Software updates automatically applied
- Easily go from one building to many with our scalable system

Enhanced Safety and Protection
- Comply with Building and Life Safety Codes and other North American regulations
- Real-time self-monitoring and maintenance alerts if units stop functioning
- Holds all emergency lighting testing and maintenance data in a secure ABB cloud
- Ownership of maintenance data input, quick testing and device monthly and annual scheduling

Improve installation efficiency
- Quick and flexible commissioning
- Ease of use due to app configuration
- Get diagnostics and part number recommendations during failures
- Reduce software and firmware upgrade time via remote Cloud operations

Set up
Easily install and add new devices through your smart device

Maintain
Defective devices are automatically detected and reported on your interface in addition to push notifications

Test
Run test instantly or program them to ensure that all your devices are working properly

Share
Easily share the results of tests with team members, maintenance staff and technicians

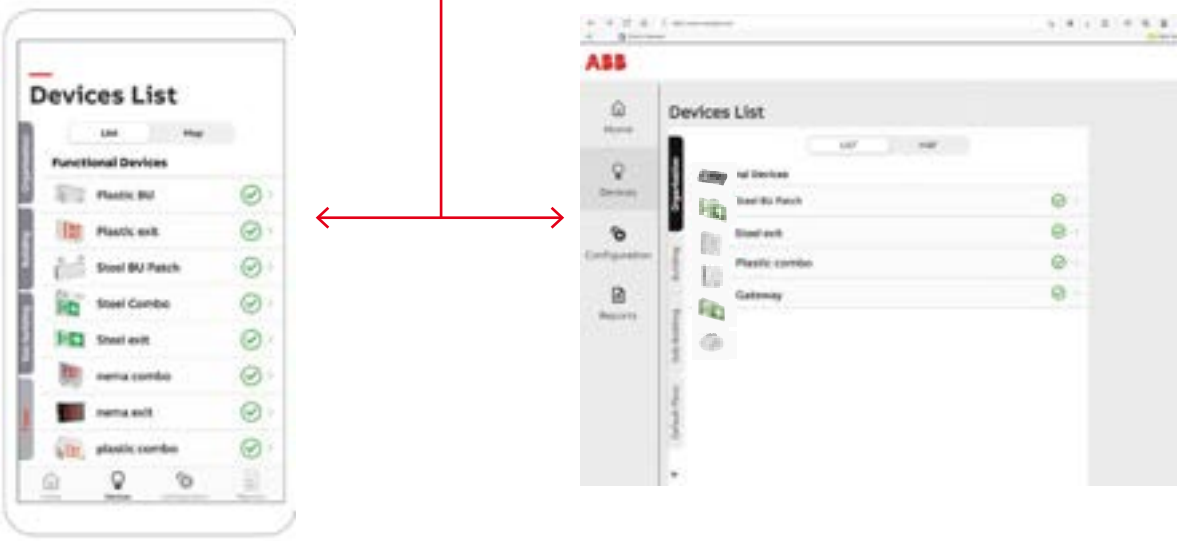

Nexus®Pro Gateway

A Gateway for each technology

Features

- IoT Gateway designed to deliver Bluetooth® Mesh connectivity
- Gateway can be connected wired or wirelessly to WiFi Routers
- Supports WiFi connections on both 2.4 GHz and 5 GHz frequency bands for added flexibility
- Communicates with up to 200 emergency units
- Supplied with a 24 VDC output
- Suitable for installation indoors in a secure location 0°C to 40°C (32°F to 104°F)
- ROHS compliant
- Gateway supplied with a Din-rail that can also be used for wall installation
- Comes standard with five (5) year warranty

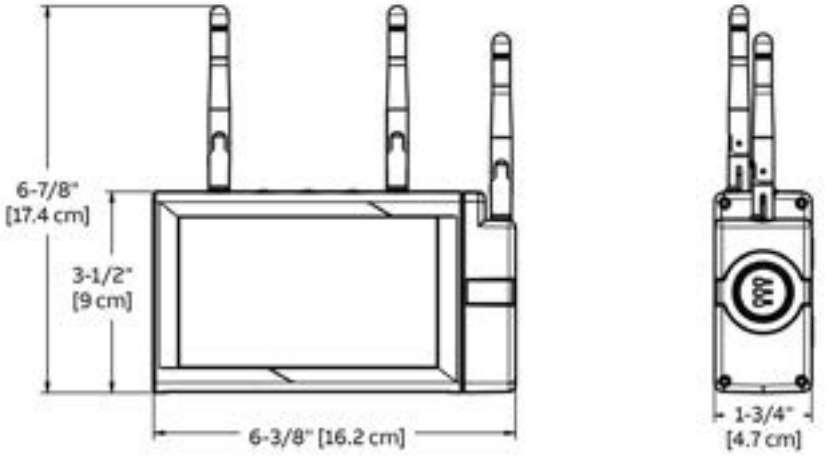

Weight

Catalog number	Weight
NEXP-GATEWAY-LA	1 lb

Power consumption

Power consumption	Power consumption
NEXP-GATEWAY-LA	4W typical, 15W maximum

Ordering information

Power consumption	Description
NEXP-GATEWAY-LA	Nexus®Pro IoT Gateway

Monitoring System

A Gateway for each technology

Nexus®RF	Nexus®Pro
Catalog number	**Catalog number**
Property protocol (900 MHz)	Property protocol (2.4GHz)
Local Server	Cloud Server
Fixed Routing	Increased RF performance Flooding Network
Controller needed to find each devices and estabilish a path	RF network creation instantaneous
More expensive	Cheaper
Web Browser	Mobile and web app
Scheduled tests but not visually listed	Clear visibility on next programmed tests
Email and mobile daily, weekly or monthly	Notifications upon unit failure / malfunction
No layout upload available	2D floor plan with marked unit location
100 units per router	200 units per Gateway, with no gateway limit
Wired Ethernet	Supports Wifi on 2.4 GHz or 5GHz and Wired Ethernet
Intranet connection	Internet connection

DALI emergency lighting
Why use DALI with emergency lighting?

Regular system checks must be carried out to guarantee that any emergency lighting system is fully operational. Emergency lighting with DALI constantly monitors the system, storing reports of any failures or issues and ensuring that the system is 100 percent healthy for the maximum time possible. The health of building occupants is assured, and automatic monitoring reduces maintenance costs.

DALI emergency system key features:
- Central monitoring from touch screen panel
- Report logging software
- Functional and full duration tests
- Faults reported to central computer, reducing maintenance time and costs
- Fully addressable emergency system with central test to BS-EN and IEC standards
- Switching of maintained luminaires, individually or per group
- Scheduled tests can be programmed via the touch screen panel and automatic tests can be staggered minimising disruption to building users and still protecting every area in case of a real emergency
- Based on the international industry standard DALI protocol
- Utilises standard DALI bus wiring

Advantages of using DALI with emergency lighting

1. Proven DALI technology specific for emergency lighting

2. Our DALI solution is based on non-proprietary systems. As long as all components of a system are DALI compliant, they will be able to communicate with each other

3. Cost-effective solution with reduced maintenance costs after commissioning

4. With the addition of the ABB DALI gateway, we can connect our DALI luminaires with KNX systems and BMS

5. DALI (DiiA) Certified

DALI emergency lighting
Safety of emergency lighting

It has never been more important to ensure the safety of a building, because ensuring safety requires full knowledge that the emergency lighting is fully operational and healthy.
DALI emergency is an extension of the DALI protocol, allowing for monitoring of the status of emergency fittings from a touch screen. Proven DALI technology is specific for emergency lighting.

About DALI emergency
DALI - Digital Addressable Lighting Interface - is an open standard defined under EN62386. This standard ensures that all DALI-compatible emergency control systems work in synchronization and that the technology is available to multiple device manufacturers.
DALI emergency lighting is a cost effective monitored emergency system that often betters the traditional systems
As a standalone monitored emergency system DALI emergency can monitor lamp and battery status and advise whether the luminaires are working, faulty, charge levels and hours of use in either normal or emergency operation.

As DALI is a two-way communication protocol, the central control can send commands to the luminaire and they will send back information to the control system.
Its a mandatory requirement that building owners are taking steps to ensure that their emergency lighting installations are routinely tested, with detailed records maintained. The associated labour costs have resulted in the owners of many larger buildings or building complexes investing in automated centralised test systems.
This type of system has also become increasingly popular since changes to the fire regulations now place the legal responsibility for recording these testing procedures solely with the building owners.
The benefits of using DALI central test systems for emergency lighting applications are wide-ranging:
• Increased safety
• Reduced maintenance labour time
• Ongoing monitoring savings

DALI
What is DALI?

DALI (Digital Addressable Lighting Interface) is a data protocol and transport mechanism that was jointly developed and specified by several manufacturers of lighting equipment.

It is essentially a network connected by a pair of cables and powered by a power supply.
The common platform of DALI enables equipment from different manufacturers to be connected together. ABB's DALI is designed to work with all DALI-compliant equipment displaying the DALI logo.
Put simply, DALI (digital addressable lighting interface) is a two-way communication system that brings digital technology to lighting.

An international standard for communication, DALI allows individual ballasts to "talk" to the user and allows the user to "talk" back via DALI controllers.

DALI is a testing and control system that offers both flexibility and reliability.

Bus wiring
In terms of wiring a DALI system also includes the bus wires that are used to connect together the DALI terminals of the various devices in the system.
- Standard 2-core cable (1.5mm2)
- 5-core cable possible to enable power and data
- Polarity free & free wiring topology
- maximum 64 devices per subnet (Hub/Routers)
- maximum 300m cabling
- maximum 250mA device consumption

Control devices
Control devices can provide information to other control devices and can send commands to control gear. Input devices are a type or a part of a control device that provides some information. Application controllers are also a type or a part of a control device and are the decision makers in a DALI system – for example, they can send commands to control gear to modify the lighting or test an emergency lighting system.

Bus power supplies
At least one bus power supply must be present in a DALI system. This is necessary to allow both communications on the bus, as well as to power any bus-powered devices. The bus power supply does not need to be a separate unit – it could be part of another device such as an DALI control unit or a KNX DALI gateway.
ABB has 3 different power supply options.
The central control DALI Touch screen panel or the KNX DALI gateway. Only one power supply is needed in each network.

Control gear
Control gear usually contains the power control circuit to drive lamps, or some other type of output such as on/off switching.

DALI emergency lighting
Testing & monitoring

ABB DALI emergency lighting offers automatic test functions from either a central controller or from the luminaire itself. This ensures you will always know the status of your emergency fitting. Effective monitoring helps to ensure the safety of building occupants and give building owners the peace of mind they require.

—
01 DALI emergency lighting and control system - Normal
—
02 DALI emergency lighting and control system - Error detected

Automatic testing & monitoring
Automatic monitoring includes the status of battery charging and the status of the main power supply. Central testing includes the current battery charge condition, functional tests and duration tests. Test frequencies can be adjusted to meet the requirements of the building or the local regulations. Testing periods can vary from weekly to monthly in the case of function tests, or annually for duration tests.

Function test
A function test that simulates a mains failure and checks the operation of the emergency light from the battery supply. If there is a failure during a function test, the local indicator LED changes its status on the luminaire.

Duration test
A duration test simulates a power failure and checks the operation of the emergency light from the battery supply for the rated duration of the product. Duration tests can be one, three hours or more depending on the local regulations. If there is a failure during a duration test, the local indicator LED alerts you to a problem or, in the case of a system monitored from a central location, the emergency lighting DALI control unit (DCU) will alert by showing an error message. As with all central test systems that require annual duration testing, this is only started after the battery has had an initial uninterrupted 24 hour+ charge period.

Local testing
Function and duration tests are initiated by the emergency light fitting. It performs automatic testing according to the locally stored settings.

Central testing
Function and duration tests are initiated by the DALI control unit and displays results on the screen.

Switching
Maintained luminaires can be switched and grouped.

Emergency lighting and control unit

—
01

—
02

KNX Integration

Connection via DALI-KNX Gateway to KNX systems

- Central monitoring, testing and control via the KNX building automation through integration of DALI self-contained emergency lighting via the DALI-KNX Gateway
- Alternative to the DALI emergency lighting control unit - ELDCS (both can't be used together)
- DALI-KNX Gateways for 64 and 2x64 luminaires
- Can be combined with DALI luminaires for general lighting
- Additional software required for use

DALI-KNX Gateway with integration in building automation

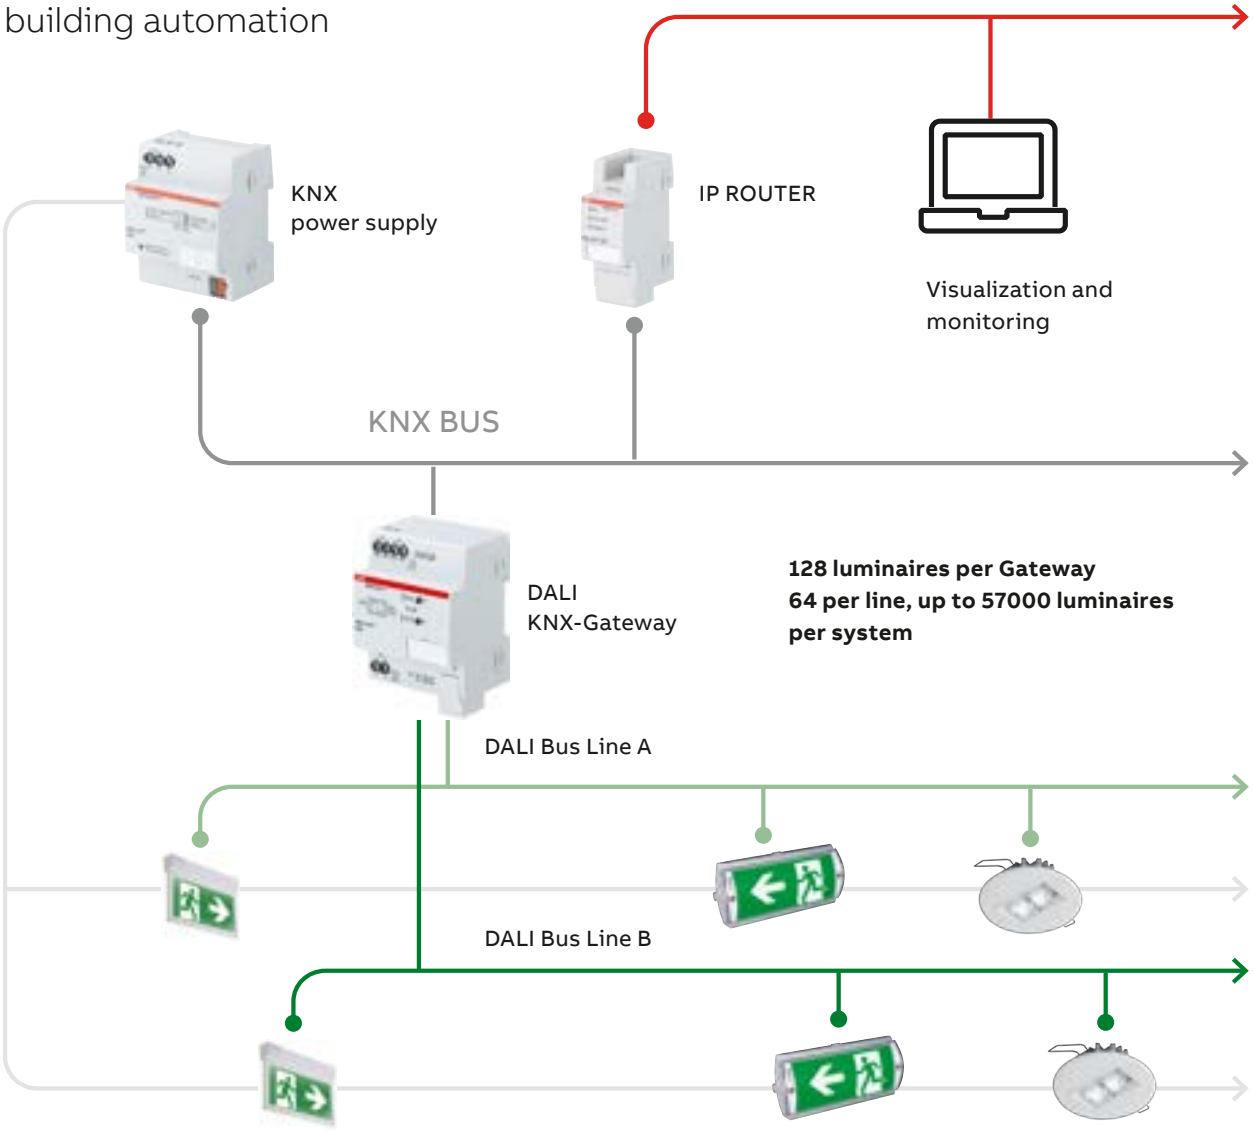

DALI control unit (DCU)

Productivity & reliability

DALI emergency lighting control panel

- Ensuring building occupant safety
- Touch screen to control, test and monitor emergency lighting
- Simple to group and easy to install

Control unit

Type Code	Order code	Material code	Description
ELDCS1/DALI/ABB	7TCA305060R0005	ELDCS1/DALI ABB	DALI emergency control unit

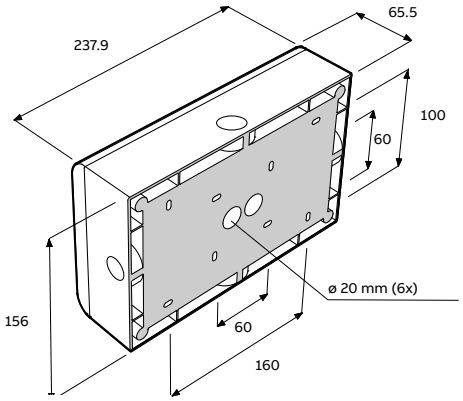

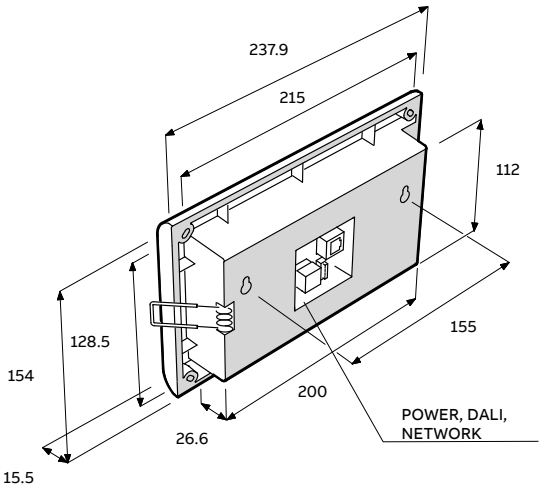

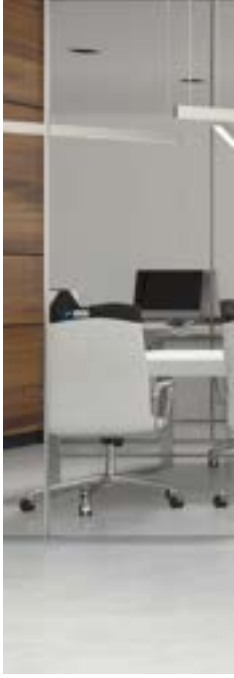

Naveo®Pro Wired or Wireless
The emergency lighting inspection and maintenance solution

Naveo®Pro is designed to enable building owners and managers to easily maintain and test emergency lighting, without the need to visually verify performance or disrupt the power supply.

Naveo®Pro Wired

Reliable in critical conditions
The Naveo®Pro Wired solution allows up to 1000-meter distance between the gateway and the luminaires. This solution is highly recommended for large buildings with multiple levels or complex building structures because it allows the connection with the luminaires to be maintained and consistent.

Upgrade your current monitoring system
The Wired solution allows for the replacement of older systems with a modern mobile app compatible system that provide access to the building status 24/7. Benefit from the most up-to-date technological features, such as the highest level of cyber security, the ability to use floor plans, remote control via the app, and more.

Maintain your building' luminaires installation
Building data from existing luminaires connected to the previous Naveo® system can be easily transferred by using the DCP tool in the Naveo®Pro Web Browser interface.

Luminaires are commissioned to the gateway via **QR code**.

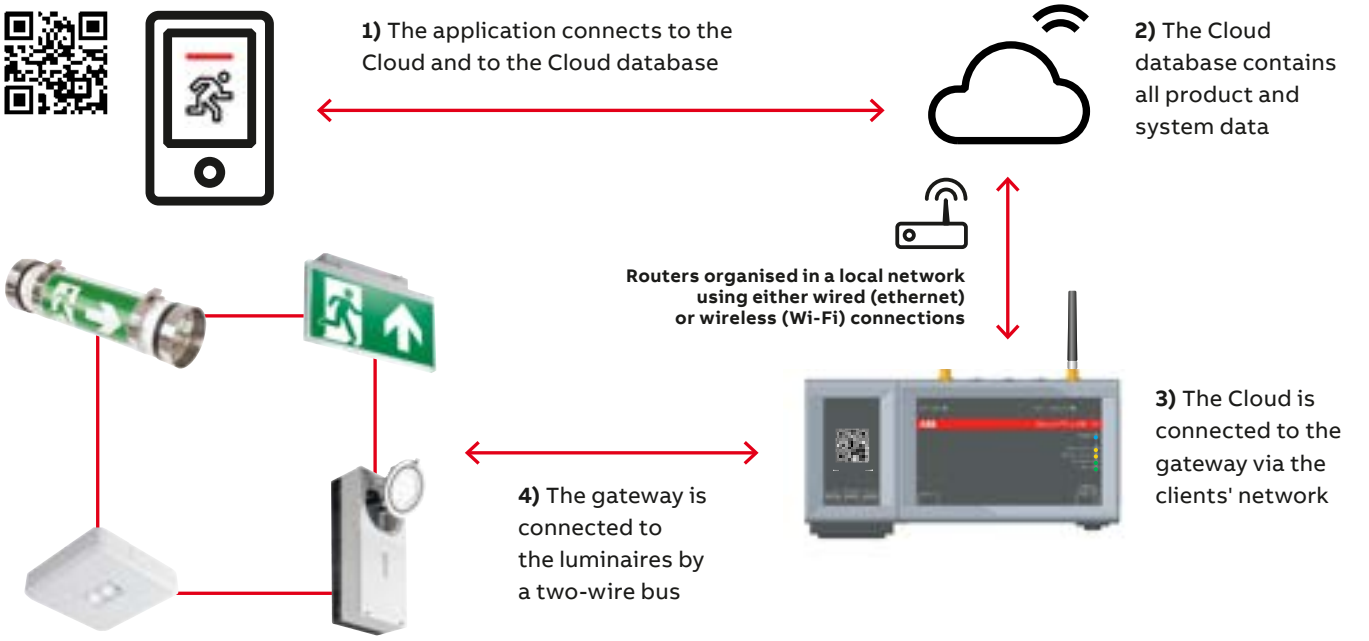

Naveo®Pro Wireless

Convert existing installation to innovative technology
The wireless solution allows for the easy and secure modernisation of buildings. It is recommended that buildings with a self-test system replace their emergency lighting system with Naveo®Pro wireless. This is straightfoward task as no additional cabling is required.

More flexibility to upgrade
Buildings can be easily modified in the future with our Wireless solution in the event of renovations, functional modifications, or extensions without the need for new cabling or expenses. Naveo®Pro Wireless will make maintenance, monitoring, and compliance easier.

A straightforward commissioning process
In buildings, the wireless solution is simple to install. Multiple luminaires are automatically and securely commissioned via Bluetooth®. The repeater's ability to extend the distance and/or signal strength ensures the connection between the luminaires is always maintained.

Luminaires are commissioned to the gateway via **Bluetooth®**.

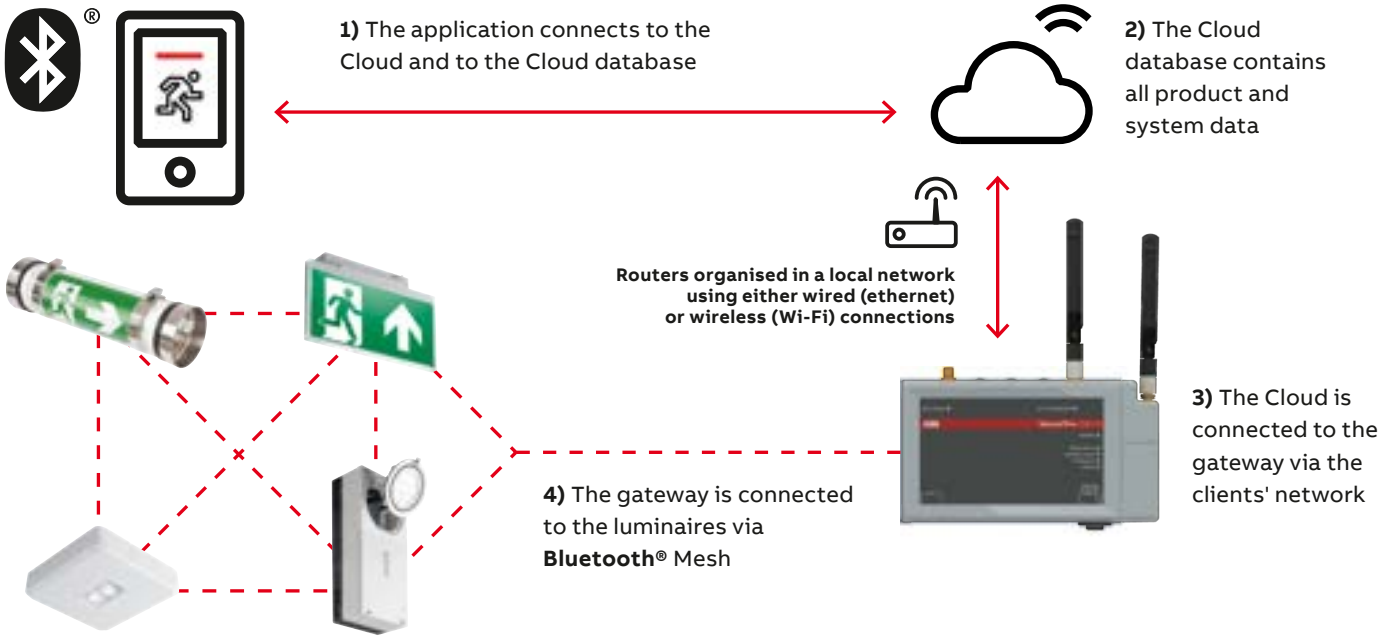

Naveo®Pro
App and web browser interface

The Naveo®Pro software and gateway works seamlessly with ABB emergency lighting to create a connected lighting infrastructure that makes buildings safer than ever.

With digital solutions, building owners now can have peace of mind knowing their buildings are safer than ever. All operations can be managed remotely, giving building owners and managers complete control wherever they are, whenever they need it most.

The web interface and mobile application allow you to:

- ✔ Monitor your building's installation at any time, independent of your location
- ✔ Plan your inspection, installation and maintenance ahead based on the data you obtain from the system
- ✔ Simple and fast installation and programming of luminaires installed using a QR code or Bluetooth® - for mobile app only*
- ✔ Schedule function and duration test schedules and collect reports
- ✔ Upload your building maps and have status and precise location of each emergency lighting luminaire in your building
- ✔ Order via automatic material list
- ✔ Share test results or status information with others
- ✔ Connect to following third-party devices: fire alarm systems, Central Battery Systems and local alarms through digital inputs/outputs.

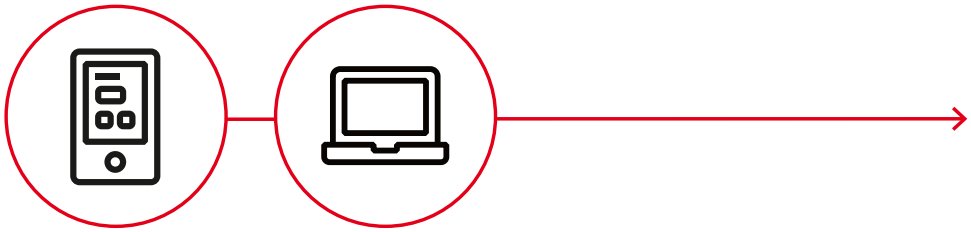

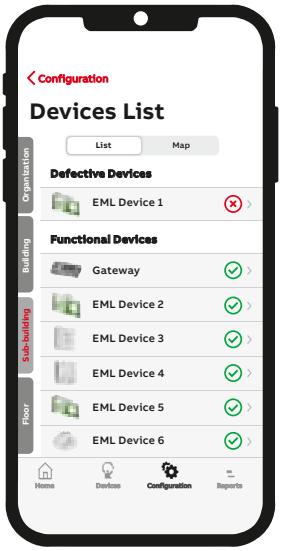

Web browser interface

https://naveopro.emergencylighting.abb.com

* QR code available on wired only
Bluetooth available on wireless only

Download on the App Store

GET IT ON Google Play

Naveo®Pro

A Gateway for each technology

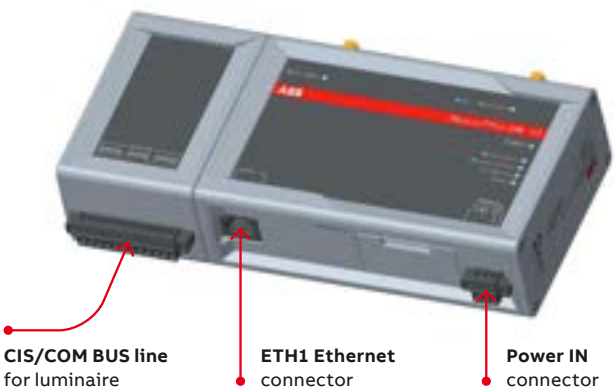

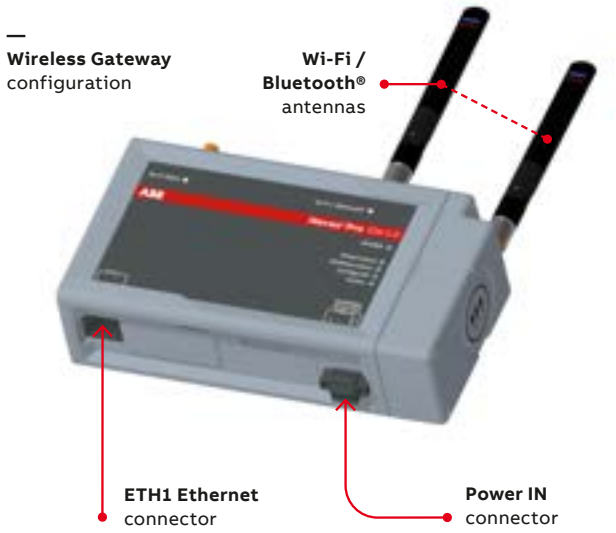

—
Products

Description	Order code	Type code
Gateway Naveo®Pro	7TCA305060R0000	51000040
Gateway Naveo®Pro + iPad Wi-Fi	7TCA305060R0004	51000041
Gateway Naveo®Pro + iPad 4G	7TCA305060R0003	51000042
Gateway Naveo®Pro Wireless BT	7TCA305060R0006	51000045
GateWay Naveo®Pro Wireless BT + Ipad Wi-Fi	7TCA305060R0007	51000046
GateWay Naveo®Pro Wireless BT + Ipad 4G	7TCA305060R0008	51000047

—
Technical specifications

Description	Technical specification
Connection voltage (input)	Nominal: 12 or 24 VDC; Range: 9 to 30 VDC with transient protection
Power consumption	4 W (standard); 15 W (maximum)
Degree of protection	IP30
Operating temperature	-40°C to +70°C
Weight	210 g (without clip/DIN rail mounting bracket) 310 g (weight with SESAM box for wired applications)
Accessories included	Power supply, an antenna, and a raid-in mounting bracket

NOTE: You can connect max. 200 luminaires per gateway for the wireless version and max. 500 luminaires per gateway for the wired version.

—
Accessories

Description	Order code	Type code
Naveo®Pro wall mounting bracket	7TCA307020R0013	758740
Wi-Fi 5 GHz antennas Naveo Pro	7TCA307020R0012	758730

—
Repeater

Type Code	Order code	Material code
ACC800S-M3/BT Repeater	7TCA305020R0235	ACC800RPT/50BT

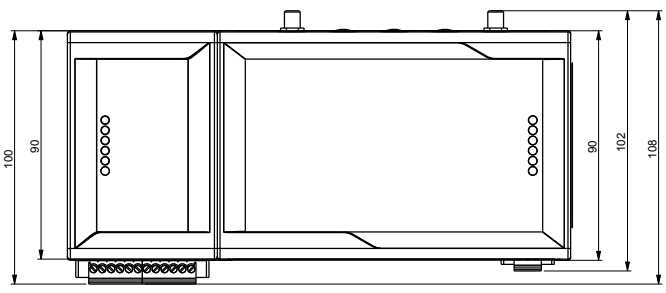

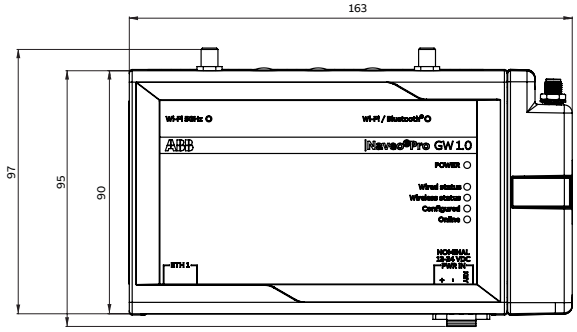

Stanilite Nexus®RF Infinity
Australia, New Zealand

ABB's Stanilite NexusRF Infinity offers the next quantum leap in monitored emergency and exit lighting

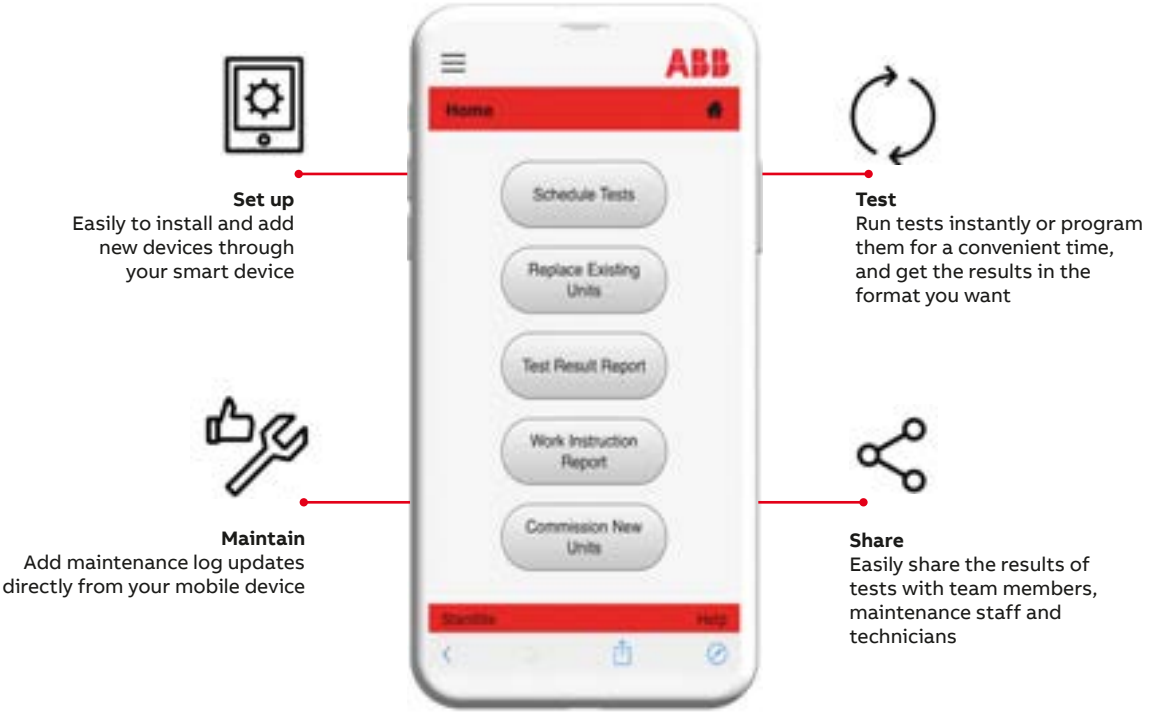

First-of-its-kind in monitored emergency and exit lighting

By harnessing the power of the mobile connectivity, Stanilite NexusRF Infinity unlocks and provides access to data and account management tools, allowing users to manage their emergency lighting system from anywhere, anytime.
For customers, this can reduce operating costs dramatically and will be one of the key elements for building owners and facility managers to reduce the total cost of ownership of safety systems in the future.
Another key element of NexusRF Infinity is the new commissioning method and interface which brings a 75% reduction of the commissioning time for installers and electrical contractors.
On top of this, functional and duration testing can be easily programmed with a mobile optimised web platform making compliance to Australian and New Zealand Standards a simple task.

Stanilite®
Nexus® RF Infinity area controller V2

Range
Non-standard range

Product group
Nexus RF components

Features
- System head end controller. Nexus RF database containing all system and unit informaion
- Co-ordinates up to 125 notes
- SD micro flash memory 8GB
- Communicates to fittings via 918 - 925.8 MHz mesh network
- 7” colour graphical user interface LCD resistive touch screen - includes stylus
- Intergrated web server for remote control
- USB A and USB B ports for connection to peripherals such as keyboard, mouse, modem, printer and laptop/PC
- Ethernet port for Lan/Wan connectivity
- 50 ohm SMA antenna jack
- Battery allows the area controller to be used in mobile mode and features fast recharge capability

Includes
- 1GB USB flash memory stick
- 2m blue Cat 5e UTP patch lead
- Wall bracket
- Mains plug pack 240VAC 50/60Hz, 12VDC 3A max output
- 150mm Dipole Antenna

Catalogue no.	Description
Nexus products	
NAC-2	Nexus RF area controller 1EIM - with battery
Spare parts	
14-00211	Battery 6 cell NiMH 7.2V 2.3Ah
02-ACBMV2	AC battery module V2
02-NRFEIMV1	Nexus RF interface module V1
32-00206	Plug pack 12V 3A

Dimensions			
	Length	**Width**	**Height**
	243mm	62mm	150mm
		Note: Including protective cover	

Weight		
	Model	**Weight**
	NAC-2	1.5kg

Construction		
	Part	**Construction**
	Body	Polycarbonate
	Bracket	Zinc steel
	Cover	Polyurethane

ABB CBS

CBS System

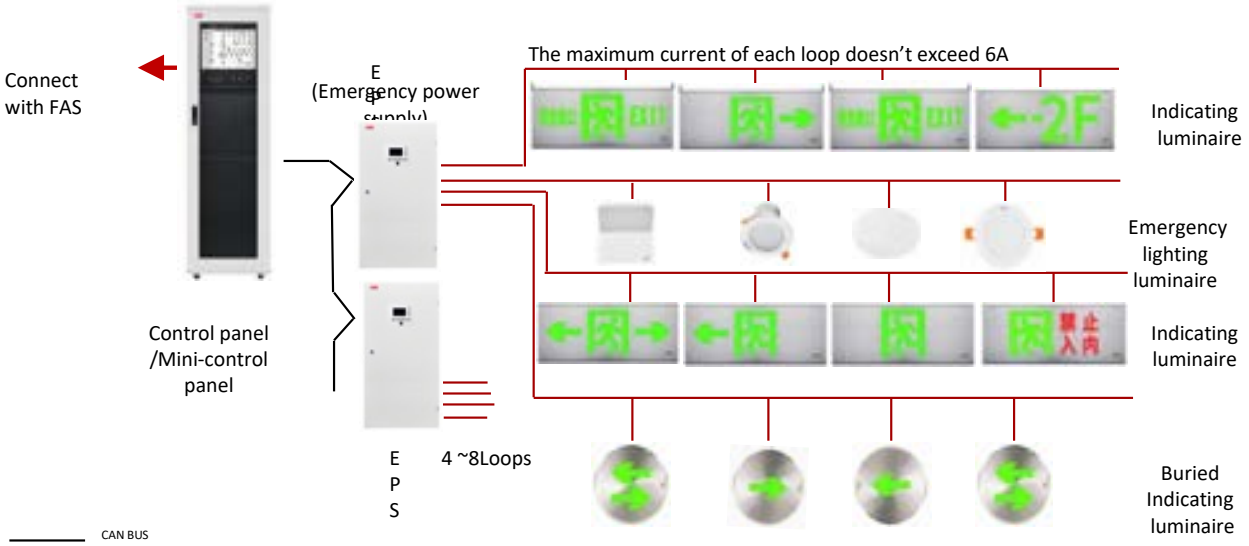

Centralized control centralized power system

ABB CBS

Indicating luminaire

Escape route signalization uses pictograms to show the direction to the exit. They have different geometries, dimensions and colors to comply to standards GB17945-2010.

Emergency lighting luminaire

Escape route lighting illuminates this route to the (emergency) exit so that people can escape safely in the event of an emergency.

Emergency power supply (EPS)

Provides secure power source in case of emergency to supply the evacuation systems. Normally located in the basement of the building or in centralized place dislocated in each floor.

System controller

The brain of the entire system, managing all the equipment, has the escape route algorithm.

Data

AC/DC 230v Input / 24 Vdc
IP 30 / IP33 / IP67
Power from 300 W up to 1kw
Construction materials Al alloy, SS304, PC, cold-rolled steel

ABB-FREE@HOME®

Electrical installation solutions for buildings

ABB-free@home®

Index

Introduction	2
System devices	18
Displays	20
Tenton®	24
Installation Standards	45
VDE	47
Sensor unit	46
Control elements	80
Inserts	81
Movement detectors	87
Sets	91
Zenit	94
Millenium	96
Zenit/Millenium	98
DIN-Rail	110
Wireless solution	124
Flush mounted actuators wireless	128
Smart Switches wireless	130
Installation Standards WL	134
System devices wireless	135
Weather	136

You may also visit our ABB-free@home® website:

Free choice
Live as your heart desires

Smart. ABB-free@home® transforms the house or the apartment into an intelligent home. Whether blinds, lights, heating, air-conditioning or door communication – comfort, safety and efficiency can finally be remotely controlled. Via a switch on the wall, via voice control or with a smartphone, tablet or personal computer.

The pleasure of simplicity
ABB-free@home® makes daily life easier. You can manage blinds, lights, heating, air-conditioning and door communication using just one system. The smartphone becomes the remote control in the house. It allows you to raise the blinds and switch on the radio in the kitchen with the touch of a button while you are still in bed – or to deactivate all lights and devices via a switch when leaving the house. Very convenient. Extremely comfortable. Very energy efficient. The setting of these scenes is as easy as can be – to suit the mood or situation.

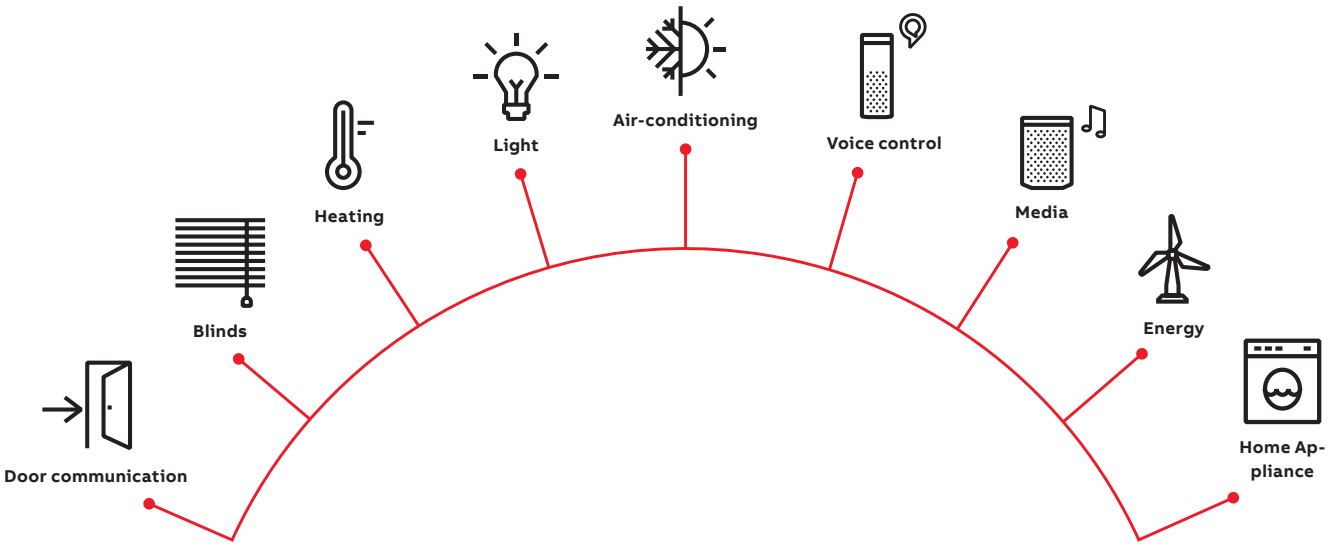

Open for new ideas
With ABB-free@home® everyone can determine for themselves how they want to use the smart living technologies. Both individual functions, such as heating or control of blinds, or a combination of different functions can be implemented. Over the course of time the system can also be flexibly extended, if one so desires. Freedom of choice at all times.

CONNECT MORE –

do more

The smooth integration of smart lighting solutions, sound systems, and modern household appliances into ABB-free@home® offers a variety of options for convenient use. All networked devices with their icons are displayed in the free@home app and the ABB-free@home® panel and can be controlled from there. All functions can also be directly controlled via the wall-mounted pushbuttons, which is possible only with free@home.

ABB-free@home® Integrations & Add-Ons enhance your ABB-free@home® experience with third-party integrations that bring added convenience and functionality to your smart home system. These collaborations ensure seamless control over various home aspects, all without additional gateways.

Lighting – LEDVANCE & Philips Hue: Manage extensive lighting options and create scenes effortlessly.

Sound – Bluesound, Sonos & Sonoro: Integrate superior sound systems for whole-home audio control.

Climate – Faber & CoolAutomation: Optimize climate control with innovative fireplaces and HVAC solutions.

Windows and blinds – Velux & Motion Blinds: Improve comfort with automated skylights and blinds.

Appliances – Home Connect & Miele:
Network top-tier appliances for enhanced smart home integration.

Home Connect Miele

Connect – SmartThings & Matter Bridge:
Achieve interoperability with various smart home devices.

SmartThings matter

EV Chargers:
Efficiently manage electric vehicle charging.

These integrations and addons elevate the capabilities of the ABB-free@home® system, creating a truly connected and intelligent home environment.

For more information refer to the applications section, pages 12 - 21.

INSTALLATION

Fast initial installation by the electrician. And easy and convenient operation and later adjustment by the user via app – even via remote control.

THE NEW FREEDOM

Limitless possibilities

One system, many extensions. Every home can be turned into a Smart Home. With its cabled or wireless sensors, actuators and control elements, ABB-free@home® is comprehensive and practical. Both for new as well as old buildings. Home automation knows no limits.

			Wired	Wireless
	Communication mean			
	Main Applications		New build	Renovation / Prefab
	System size	Max number of devices	Up to 150	
	Smart Home hub	SysAP	● Commission & control	● Commission & control
		OneTouch	○ Visualization Control, if connected to SysAP	● Commission, visualization & control
		SysAP Wireless	○	● Commission & control
	Door Entry		Welcome & Welcome IP can be integrated adding a Smart Home panel.	
	Connectivity	Remote smart home control on mobile APP	●	●
		Remote door call mobile APP	○ With a Smart Home panel	○ With a Smart Home panel
		Remote maintenance	●	●

Whether its is about moving to a new place, building a new house or undergoing a home renovation, ABB-free@home® perfectly fits the requirements of smarter residential buildings, providing flexible combinations of wired and wireless solutions, to make homes more comfortable, valuable and smarter.

For future-proof new buildings
The wired solution is suitable especially for new constructions, where a complete and future-proof, extensible system can be installed. The System Access Point enables effortless connection to ABB-free@home® wired and wireless, Matter-enabled devices and ABB-Welcome door entry systems, both 2-wire and IP. And with our range of Smart Home panels everything is under control, from answering the door to having central monitoring of all the smart home functions, accessible also from remote through the ABB-free@home® Next App.

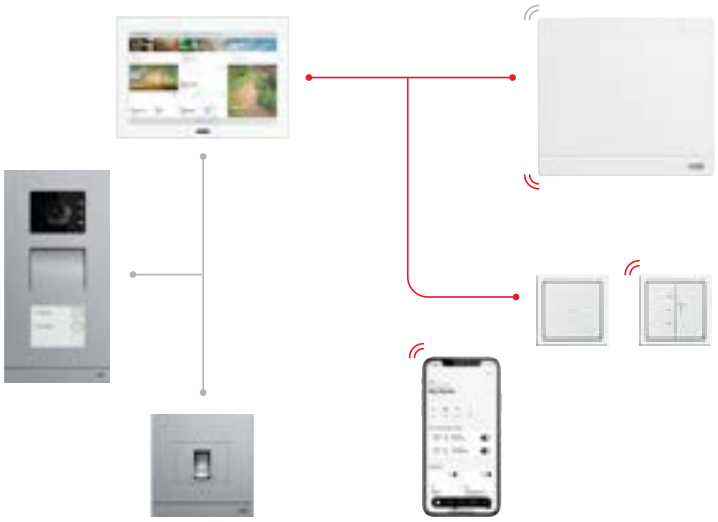

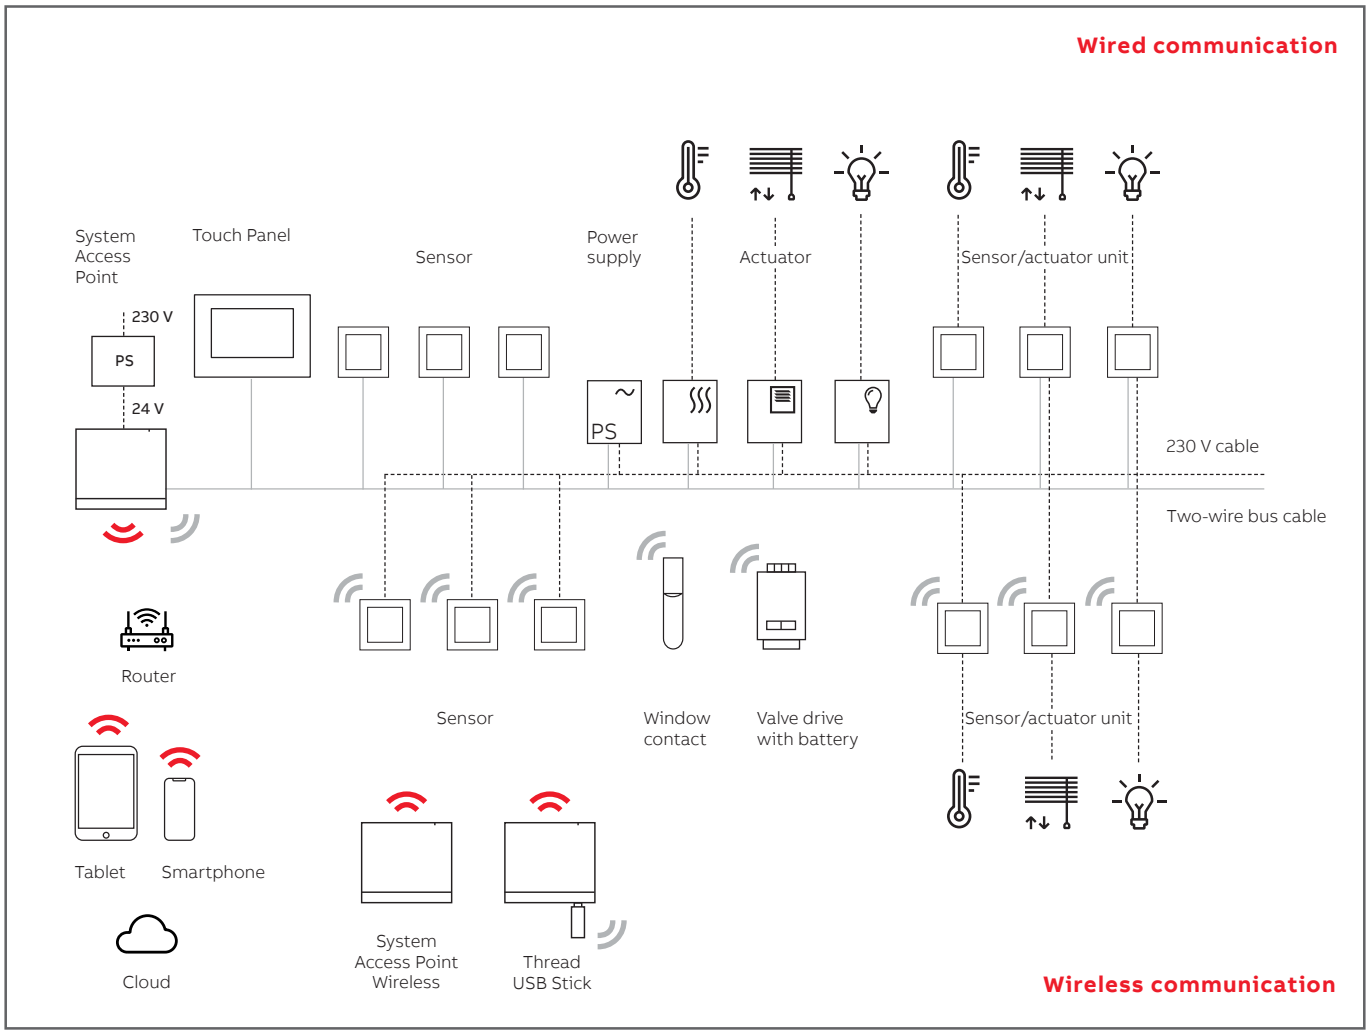

Smart Home Control, Made Simple
Whether you're renovating or upgrading, flexibility is essential – and that's exactly what the **System Access Point Wireless** delivers. Supporting up to 150 devices, it acts as the central hub of your smart home, enabling seamless control of lighting, blinds, climate, security, and more – all without invasive wiring. Dual-band Wi-Fi (2.4GHz & 5GHz) ensures a fast, stable connection, making it ideal for modernising homes while preserving walls and aesthetics.

With remote access via the **ABB-free@home® Next App**, you're always in control – from anywhere.

Prefer a more integrated solution? The **OneTouch panel** offers a sleek, all-in-one interface. Running the ABB-free@home® OS and Matter-certified, it connects directly to ABB-free@home® wireless or Matter-enabled devices, as well as ABB-Welcome door entry systems – no System Access Point required.

OneTouch also supports up to 150 devices and can optionally be linked to a wired system, offering centralised control of lighting, blinds, door answering, and preset scenes. Whether used alone or as part of a larger ecosystem, it's a stylish, intuitive way to manage your smart home.

Your ABB-free@home® components

01 System Access Point

02 System Access Point Wireless

01

02

System Access Point
The Core of ABB-free@home®

Connects your smart home via LAN or built-in WLAN. Pre-installed software enables easy setup, control, and customization, no extra tools needed. Save and restore settings anytime. Matter-certified for seamless integration with Matter-enabled devices.

System Access Point Wireless Solution
Smart Control, No Invasive Rewiring

Ideal for retrofits, System Access Point Wireless offers full smart home control without invasive wiring. Dual-band Wi-Fi ensures stable performance. Matter-certified and compatible with ABB-free@home® wireless. Easy to install with flexible mounting, built-in diagnostics, and global power adapters.

03 Thread USB Stick

03 OneTouch

03

04

Thread USB Stick
The Thread USB Stick is a compact, powerful addition to your ABB-free@home® system, designed to enhance connectivity for renovations and retrofits with minimal effort. This plug-and-play device enables seamless integration of Thread-enabled and Matter-certified devices, expanding your smart home's capabilities without the need for additional wiring. Simply connect the Thread USB Stick to the compatible USB port on the System Access Point, and it establishes a reliable, low-power mesh network for devices like lights, sensors, and thermostats. Ideal for upgrading existing homes, its small form factor and easy setup make it a perfect solution for adding robust, wireless smart home functionality while maintaining your home's aesthetic integrity.

OneTouch
Running ABB-free@home® Operating System and being Matter-certified, OneTouch is both a control panel and hub for home automation and door communication, making it the most suitable and flexible touch panel for an evolving Smart Home installation. It enables direct to ABB door entry systems, ABB-free@home® wireless devices, and Matter-enabled devices*. It can also be connected to an ABB-free@home® wired system to control it.

matter

Matter
- Light (lamps and switches)
- Electricity (sockets and switches)
- Heating/air conditioning (thermostats and controllers)
- Shading (blinds, shutters)
- Sensors (movement and opening)

—
05 Sensor, 1gang
—
06 Switch actuator, 4gang
—
07 Binary input, 2gang, flush-mounted
—
08 Power supply

The actuators and sensors

Actuators for switching, dimming and control are available for ABB-free@home®. The flush-mounted binary inputs also allow the integration of conventional switches and devices, such as window contacts, for example. Push-buttons, room temperature controllers and movement detectors are available as sensors.



—
03

—
05

—
04

—
06

Central distribution board with rail-mounting actuator

The installation of central rail-mounting actuators in the consumer unit makes the installation of the sensors even easier – as only the bus line is located in the flush-mounted box. With this method, the costs for each channel can be reduced.

Sensor/actuator unit for decentralised control

All in one. With the sensor/actuator unit, both the sensor and actuator are located in a single device to save space. The basic function of the unit is pre-configured, which makes programming the basic function unnecessary – but possible if required. The 230-volt line is wired as usual.

Sensor/actuator unit
The sensor/actuator unit combines a control element and, for example, a switch actuator in the single flush-mounted housing. It is installed in the same way as a flush-mounted switch. The device has already been pre-programmed: this means the light can be switched on directly after installation – without any programming. The sensor/actuator unit can, of course, be freely reconfigured via the user interface, just like all other sensors and actuators.

COMMISSIONING

So easy, anyone can do it

Intuitive operation. The ABB-free@home® app is easy to understand. To start with, all available devices in the rooms are activated in the display, allowing the favourite settings to be made immediately via drag-and-drop.

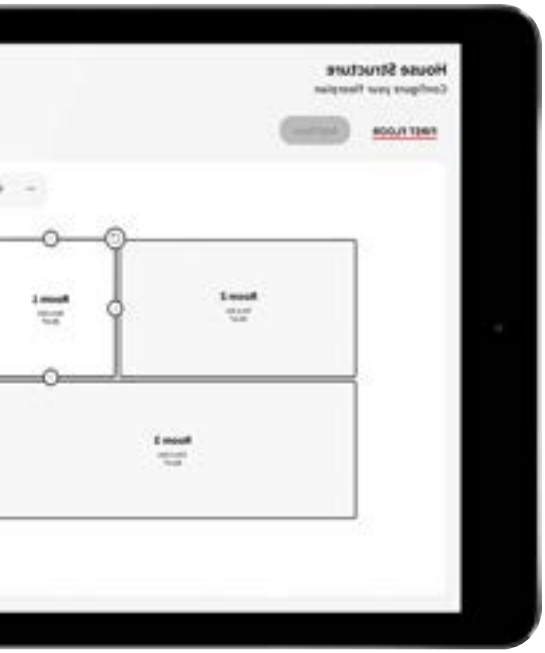

Easy to install – and even easier to operate
The ABB-free@home® app has been optimised for use in daily life. The wizard guides one through the system. The most important functions are clearly marked with self-explanatory icons. It makes no difference whether the components are connected in the two-wire bus or wirelessly. One has control over a uniform system. For maximum security, a personal password can be activated when logging in. This protects the home automation system against unauthorized access and tampering.

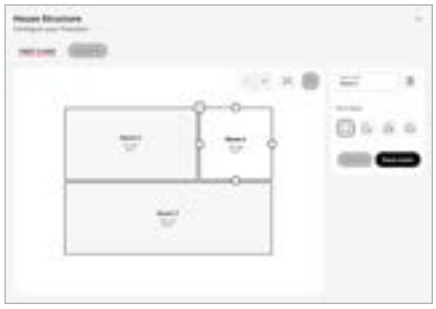

The house
First the electrician sets up the floor plan with its floors and rooms.

Assigning
Then the sensors in the app are integrated in the floor plan and assigned in the system.

Combining
And finally, the elements can be combined according to individual preferences and requirements.

Simple and time-saving
The electrician performs the initial configuration of the system via app. Operation is particularly fast and saves on costly billable hours.

Scene control
The user can easily combine the switches and devices available in each room to create personal scenes. The lighting scene for an evening on the sofa, for example.

Time control
Roller blinds can be automatically moved and lights can be switched at any time or dependent on sunrise or sundown.

Panel setting
The most important functions can be controlled from a central location in the house and easily changed later at any time.

PROSERVICE PORTAL

Professional installers digital services

If you require assistance or maintenance support, this can be done virtually by your installer, without the need of an on-site visit.
The ProService portal offers a digital support possibility at any time.

Service and Support virtually for your ABB-free@home® system.
This grants lots of benefits to free@home users:

Remote maintenance
If you require assistance, the installer can access the ABB-free@home® system via the ProService portal to make the adjustments and changes. Also firmware updates can be done virtually.

Full Transparency
The system promotes trust and transparency by giving the home owner complete visibility of any access or work on their system. The log shows the homeowner detailed information what has been changed: person, time and duration as well as any changes to the system – and the owners are able to revoke access rights at any time.

Full control by home owner
The home owner is able to grant access to the installer for a maximum of 24 hours. Secure end-to-end encryption connects the Installer Portal to the customer's System Access Point.

Efficient response
Faster and more efficient response time when you require support from an installer. No travel time is required and no need to schedule an on-site appointment.

It’s easy for the installer

Registration
Registration to the ProService portal works easily in the MyBuildings portal with the use of your ABB MyBuildings portal access data.

Creating employees
You authorize your employees via an invitation e-mail to use the ProService portal. As the owner of the account you can now see all your registered employees and assign them to individual customers.

Remote maintenance
After the customer has authorized the 24-hour time window for access, the installer can then access the ABB-free@home® system via the ProService portal and make adjustments and changes.

Creating customers
You invite your customers to use the remote maintenance service also via e-mail. You can then support your customers via the ProService portal.

	Pro_ONE	Pro_PLUS	Individual
Management & Supervision	X	X	X
Cloud Backup	X	X	X
Remote Maintenance	X	X	X
Attachable End Customers	1	< 99	> 99
	Free of charge	**Paid subscription**	Individual offer

ABB-free@home®
System devices

System Access Point 3.0
For commissioning and remote control of the ABB-free@home® system.
Support for up to 150 free@home participants (independent of whether wireless or wired).
With integrated free@home wireless antenna. With integrated free@home bus connection.
Easy to mount thanks to the external power adapter (included in the scope of delivery).
Optional supply via the yellow/white twisted pair of the bus line (24 V).
Allows the execution of astro and time programs. Commissioning and remote control is executed via the web interface or app. No additional commissioning software is required. Easy commissioning with WLAN ad-hoc mode. Connection to the home network via WLAN client mode or via CAT cable. Suitable as table device. Suitable for wall mounting. 2 x USB ports for future extension of functions. 2.4 GHz and 5 GHz WLAN. 1 GHz dual core processor.
512 MB working storage. Scope of delivery: Mounting plate, power adapter, screws and dowels
The bus connection is provided via the enclosed bus terminal. Display elements: LED for status display. Bus voltage: 24 V. Rated voltage: 230 V~. Rated frequency: 50 Hz / 60 Hz.
Protection class (device): IP 20. Temperature range (device): -5 °C - 45 °C. Storage temperature range: -20 °C - 70 °C. Dimensions: (L x W x D): 107 mm x 109 mm x 30 mm. Programming via the web interface of the System Access Point. Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current Online-Catalogue. A bus power supply is required for the operation of free@home wired devices. When operating with more than 64 participants, an additional bus power supply is required.

Rated voltage: 230 V~

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
System Access Point 3.0		SAP.3	2CKA006200A0871			1
System Access Point 3.0 WIRELESS		SAP.3-WL	2CKA006200A0968			1

DIN Rail Adapter
For mounting the free@home System Access Point 2.0 on a mounting rail.
Mounting is carried out without tools.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	261637	SAP-A1.1	2CKA006200A0158			1

External antenna
for ABB-free@home®
For use with System Access Point SAP/S.3
Feed the free@home wireless signal to the outside when the internal antenna of the System Access Point is shielded due to structural conditions.
With magnetic base.
Cable length: 1.5 m

WIRELESS	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	216224	SAP-1-WL	2CKA006200A0100			1

1) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.

ABB-free@home®
System devices

SAP/A2.1

Alarm Stick

Suitable for the free@home system integration of the Busch-Smoke alarm detector, Busch-Heat detectors and Busch-CO Alarm via the associated radio modules
System prerequisite: ABB-free@home® System Access Point from SAP/S.3.
Including USB extension cables for practical fixing outside the junction box
Integration of alarm devices as free@home participants.
Linking of the integrated detector with scenes and groups.
Generation of Pusch notification in case of an alarm for mobile terminal devices.
Radio frequency: 868 MHz

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	EAN	Type code	Order code			
	276990	SAP/A2.1	2CKA006800A2868			

OneTouch

Featuring our first panel equipped with an integrated system access point, simply add ABB-free@home® wireless or flex devices to unlock the full potential of a Smart Home with the added convenience of remote access to control all the the features and answer door calls. It offers an ideal starting point for anyone looking to begin their smart home adventure: begin with door entry and extend it with free@home wireless or Matter. OneTouch can also be connected to a free@home wired system to control it.

- Viewing angle: 75°
- Power Supply: 2-wire bus + 24V DC PoE for IP
- Intuitive GUI on 7'' IPS screen (resolution: 1024 x 600 px)
- Type of installation: SM & FM
- Dimensions: 192 x 128 x 17.2 mm / 7.6 x 5 x 0.7 inch

Version	Article no.	Order no.	Global (w.o. DE and AT)
Black ■	M2249-2B	2TMA320051B0001	●
White □	M2249-2W	2TMA320051W0001	●

SAP-3.1

ABB free@home® Thread Stick

ABB free@home Thread USB Stick for the connection with the System Access Point.
Suitable to extend the free@home system with Matter devices via Thread radio technology.
System Requirement: free@home System Access Point
from version 2.0 and SAP/S.3
Thread Stick with: USB type A plug
Radio frequency: 2400 - 2483,5 MHz Show less

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	EAN	Type code	Order code			
ABB free@home® Thread Stick	355718	SAP-3.1	2CKA006200A0941			1

ABB-free@home®

Displays

RT/U12.86.1-825

ABB RoomTouch® 4”
Freely programmable Touch panel 1 – up to 12 fold featuring a 4-inch IPS screen with 480*480 resolu-tion that offers home control and monitoring of the free@home, or KNX system. Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element. With scene function, logic functions, presence simulation and time programs.

KNX and free@home functions:
• A total 12 control elements are displayed on a maximum of 12 pages.
• 12 fault and alarm messages
• 10 logic functions
• 10 weekly timers
• 10 scene actuators
• 1 Integrated temperature controller (RTC)
• Page display with a maximum of 4touch surfaces on one page
• Primary function 18 fault and alarm messages
• Integrated temperature sensor.
• Haptic feedback
• proximity sensor
• brightness sensor
• 1 binary input or external temperature sensor input (PT1000 / 6226/T).

External power supply needed: 20-32 VDC (SELV)
Number of bus subscribers: 1
Optional Removal protection: TZE/U.0.xx.CK

Display size: 10,16cm (4”)
Display resolution: 420*420
Display screen: IPS display
Dimensions (L x W x D): (86mm x 86mm x 11mm)
Display surface: glass black (-825), glass white (-811)
Frame color: black matt (-885), white matt (-884)

Class of temperature controller 1 Contribution to space heating energy efficiency 1,0%.

Description	Bbn 6955891	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
RT/U12.86.1-825	820029	RT/U12.86.1-825	2TMA310011B0003		0,127	
RT/U12.86.1-811	820036	RT/U12.86.1-811	2TMA310011W0001		0,17	

ABB-free@home®
Displays

ST/U10.1.1-811

ABB SmartTouch® 10”

Freely programmable Touch panel featuring a 10-inch IPS screen with 1280*800 resolution that combines smart home automation and door communication in one device for residential applications, hotels, and commercial buildings. ABB SmartTouch® 10” offers home control and monitoring of the ABB-free@home®, or ABB i-bus®KNX system and the fully integrated functions of ABB-Welcome.

Control, observe and manage your entire installation on one device: Switching – Dimming – Slider – Blind – RGBW control element – Step switch – Scene switch – Display element – Audio control element – RTC control element – VRV control element and display different values such as energy consumption and production. With scene function, logic functions, presence simulation and time programs. ABB SmartTouch® 10” can also be used as an end device for communication with the ABB-Welcome outdoor stations, and as part of the ABB-Welcome door communication system.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white/stainless	–	ST/U10.1.1-811	2TMA310051W0001		0.793	1
black/stainless	–	ST/U10.1.1-825	2TMA310051B0001		0.793	1
white/graphite	–	ST/U10.2.1-811	2TMA310051W0002		0.953	1
black/graphite	–	ST/U10.2.1-825	2TMA310051B0002		0.953	1
white/satin gold	–	ST/U10.3.1-811	2TMA310051W0003		0.953	1
black/satin gold	–	ST/U10.3.1-825	2TMA310051B0003		0.953	1
white/rose gold	–	ST/U10.4.1-811	2TMA310051W0004		0.953	1
black/rose gold	–	ST/U10.4.1-825	2TMA310051B0004		0.953	1

ST/A10.1-811

Surface Mounting Frame for SmartTouch® 10”

Surface mounting frame for mounting the ABB SmartTouch 10" ST/U10.x.1-8xx on:

- standard flush mounted wall box VDE & BS
- Already installed flush mounted installation box:
  - 6136/UP
  - 8136/01 UP-500
  - UP-KAST 2
- to be mounted directly on the wall
- to be mounted on the ABB-Welcome table stand

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	ST/A10.1-811	2TMA310161W0001		0.144	1
black	–	ST/A10.1-825	2TMA310161B0001		0.144	1

6136/07 UP-500

Busch-SmartTouch Installation Box, FM

For flush mounting and hollow panel mounting of the ABB SmartTouch 10" ST/U10.x.1-8xx. Windproof.

Dimensions flush mounting (H x W x D): 152 mm x 235 mm x 60 mm.

Dimensions hollow wall (H x W x D): 146 mm x 227 mm x 50 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	6136/07 UP-500	2CKA006136A0212		0.549	1

ABB-free@home®
Displays

Temperature sensor
For use as remote sensor.
Line type: H03 VV-F
Cable length: 4 m
Type: NTC 10 kohm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	213339	DP4-T-1	2CKA006220A0721			1

IP touch 10
HD resolution display (1280x800px). With integrated induction Loop. Can be used for ABB Welcome IP, ABB i-bus KNX, ABB-free@home. For ABB-Welcome IP support direct connection to ABB-Welcome App. For ABB-free@home: Up to 4 pages and each with up to 25 control elements. Total 100 control frames. For ABB i-bus KNX: Up to 8 pages and each with up to 25 control elements. Total 100 control frames. Surface/flush/desktop mountable. Power Supply over PoE, local power supply or plug-in power supply (53011PS).

Dimensions (LAN+LAN)
Height: 251 mm
Base: 185 mm
Width: 31 mm

Dimensions (LAN+WiFi)
Height: 251 mm
Base: 185 mm
Width: 17 mm

		Version	Black	White
LAN+LAN interface	Full glass	**Article no.** **Order no.**	H8237-9BG 2TMA130051B0005	H8237-9WG 2TMA130051W0005
LAN+LAN interface	Stainless steel end strip	**Article no.** **Order no.**	H8237-5B 2TMA130050B0055	H8237-5W 2TMA130050W0055
LAN+WiFi interface	Full glass	**Article no.** **Order no.**	H8237-8GB 2TMA130051B0004	H8237-8WG 2TMA130051W0004
LAN+WiFi interface	Stainless steel end strip	**Article no.** **Order no.**	H8237-4B 2TMA130050B0054	H8237-4W 2TMA130050W0054

Surface mounted box for IP touch 10"
Mounting of IP touch 10 '' panel on the wall.
• For surface-mounted installation of indoor station.
• The product is packed with accessories to ensure qualified installation

Technical details:
• Dimensions: 251 x 184 x 14 mm

Version	White	Black
Article no. **Order no.**	42371S-W 2TMA130161W0001	42371S-B 2TMA130161B0001

Flush-mounted box & pre-installation box for IP touch 7&10
• Flush-mounted box and Pre installation box for 7&10 inch video indoor station.
• The flush mounting box is fitted with knock down holes for cabling from left, right, bottom or back.
• The product is packed with accessories to ensure qualified installation.

Technical details:
• Dimensions: 194 x 145 x 55 mm, 2 boxes together

Article no. **Order no.**	42361F 2TMA130160B0132

ABB-free@home®
Displays

IP touch 7
With integrated induction Loop. Can be used for ABB Welcome IP, ABB i-bus KNX, ABB-free@home. For ABB-Welcome IP support direct connection to ABB-Welcome App. For ABB-free@home: Up to 4 pages and each with up to 16 control elements. Total 64 control frames. For ABB i-bus KNX: Up to 8 pages and each with up to 16 control elements. Total 64 control frames. Surface/flush/desktop mountable. Power Supply over PoE, local power supply or plug-in power supply (53011PS).

Dimensions (LAN+LAN)
Height: 199 mm
Base: 150 mm
Width: 30 mm

Dimensions (LAN+WiFi)
Height: 199 mm
Base: 150 mm
Width: 17 mm

		Version	Black	White	Flush Mounting (FM)	Surface Mounting (SM)
LAN+LAN interface	Stainless steel end strip	**Article no.** **Order no.**	H8236-5B 2TMA130050B0067	H8236-5W 2TMA130050W0067	●	
LAN+WiFi interface	Stainless steel end strip	**Article no.** **Order no.**	H8236-4B 2TMA130050B0065	H8236-4W 2TMA130050W0065	●	●

Surface mounted box for IP touch 7" panel
Mounting of IP touch 7" panel on the wall.
- For surface-mounted installation of indoor station.
- The product is packed with accessories to ensure qualified installation.

Technical details:
- Dimensions: 197 x 148 x 13 mm

Version	White	Black
Article no. **Order no.**	42361S-W 2TMA130160W0017	42361S-B 2TMA130160B0080

Flush-mounted box & pre-installation box for IP touch 7&10
- Flush-mounted box and Pre installation box for 7&10 inch video indoor station.
- The flush mounting box is fitted with knock down holes for cabling from left, right, bottom or back.
- The product is packed with accessories to ensure qualified installation.

Technical details:
- Dimensions: 194 x 145 x 55 mm, 2 boxes together

Article no. **Order no.**	42361F 2TMA130160B0132

ABB-free@home®

Tenton

8gang Control, silver

For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. With integrated room temperature controller for direct control of heating actuators Setpoint temperature can be adjusted via App or Panels. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14470	SB-F-8.0.1-83	2CKA006220A0856			0



12gang Control, silver

For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. With integrated room temperature controller for direct control of heating actuators Setpoint temperature can be adjusted via App or Panels. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14487	SB-F-12.0.1-83	2CKA006220A0857			0

RTC, 6gang, silver

Control element with room temperature controller function. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14494	SBR-F-6.0.1-83	2CKA006220A0858			0

RTC, 10gang, silver

Control element with room temperature controller function. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	314500	SBR-F-10.0.1-83	2CKA006220A0859			0

ABB-free@home®

Tenton

RTC IAQ, 6gang, silver

Control element with room temperature controller function and CO2/VOC/moisture sensor. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 2

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14517	SBC-F-6.0.1-83	2CKA006220A0860			0

RTC IAQ, 10gang, silver

Control element with room temperature controller function and CO2/VOC/moisture sensor. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 2

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14524	SBC-F-10.0.1-83	2CKA006220A0861			0

8gang Control, white

For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. With integrated room temperature controller for direct control of heating actuators Setpoint temperature can be adjusted via App or Panels. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14531	SB-F-8.0.1-84	2CKA006220A0862			0



12gang Control, white

For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. With integrated room temperature controller for direct control of heating actuators Setpoint temperature can be adjusted via App or Panels. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14548	SB-F-12.0.1-84	2CKA006220A0863			0

ABB-free@home®

Tenton

RTC, 6gang, white

Control element with room temperature controller function. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14555	SBR-F-6.0.1-84	2CKA006220A0864			0

RTC, 10gang, white

Control element with room temperature controller function. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14562	SBR-F-10.0.1-84	2CKA006220A0865			0

RTC IAQ, 6gang, white

Control element with room temperature controller function and CO2/VOC/moisture sensor. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature.For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 2

	Bbn 000000	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14579	SBC-F-6.0.1-84	2CKA006220A0866			0

RTC IAQ, 10gang, white

Control element with room temperature controller function and CO2/VOC/moisture sensor. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 2

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14586	SBC-F-10.0.1-84	2CKA006220A0867			0

ABB-free@home®

Tenton

8gang Control, white matt

For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. With integrated room temperature controller for direct control of heating actuators Setpoint temperature can be adjusted via App or Panels. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14593	SB-F-8.0.1-884	2CKA006220A0868			0



12gang Control, white matt

For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. With integrated room temperature controller for direct control of heating actuators Setpoint temperature can be adjusted via App or Panels. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14609	SB-F-12.0.1-884	2CKA006220A0869			0

RTC, 6gang, white matt

Control element with room temperature controller function. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14616	SBR-F-6.0.1-884	2CKA006220A0870			0

RTC, 10gang, white matt

Control element with room temperature controller function. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14623	SBR-F-10.0.1-884	2CKA006220A0871			0

ABB-free@home®

Tenton

RTC IAQ, 6gang, white matt

Control element with room temperature controller function and CO2/VOC/moisture sensor. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 2

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14630	SBC-F-6.0.1-884	2CKA006220A0872			0

RTC IAQ, 10gang, whitematt

Control element with room temperature controller function and CO2/VOC/moisture sensor. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 2

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14647	SBC-F-10.0.1-884	2CKA006220A0873			0

8gang Control, black matt

For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. With integrated room temperature controller for direct control of heating actuators Setpoint temperature can be adjusted via App or Panels. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14654	SB-F-8.0.1-885	2CKA006220A0874			0

12gang Control, black matt

For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. With integrated room temperature controller for direct control of heating actuators Setpoint temperature can be adjusted via App or Panels. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14661	SB-F-12.0.1-885	2CKA006220A0875			0

ABB-free@home®

Tenton

RTC, 6gang, black matt

Control element with room temperature controller function. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14678	SBR-F-6.0.1-885	2CKA006220A0876			0

RTC, 10gang, black matt

Control element with room temperature controller function. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 1

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14685	SBR-F-10.0.1-885	2CKA006220A0877			0

RTC IAQ, 6gang, blackmatt

Control element with room temperature controller function and CO2/VOC/moisture sensor. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 2

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14692	SBC-F-6.0.1-885	2CKA006220A0878			0

RTC IAQ, 10gang, blackmatt

Control element with room temperature controller function and CO2/VOC/moisture sensor. For controlling commercially available actuating drives in combination with free@home Heating-/Fan-Coil Actuators. With display of set-value and current temperature. For transmitting switching, push-button, dimming and blind commands to an ABB-free@home® actuator. With integrated bus coupler. With labelling field. Number of bus subscribers: 2

	Bbn 40113953	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	14708	SBC-F-10.0.1-885	2CKA006220A0879			0

ABB-free@home®

Tenton

SLS/A.0.1-84

Cover for Label Area, small, RTC

Marking coverplate for RTR with 6 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLS/A.0.1-84	2CKA006330A0022			1
studio white matt	–	SLS/A.0.1-884	2CKA006330A0097			1
black matt	–	SLS/A.0.1-885	2CKA006330A0098			1
aluminium silver	–	SLS/A.0.1-83	2CKA006330A0099			1

SLM/A.0.1-84

Cover for Label Area, Control Element, small

Marking coverplate for 8 gang control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLM/A.0.1-84	2CKA006330A0024			1
studio white matt	–	SLM/A.0.1-884	2CKA006330A0105			1
black matt	–	SLM/A.0.1-885	2CKA006330A0106			1
aluminium silver	–	SLM/A.0.1-83	2CKA006330A0107			1

SLB/A.0.1-84

Cover for Label Area, large, RTC

Upper marking coverplate for RT with 10-fold control element.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
davos/studio white	–	SLB/A.0.1-84	2CKA006330A0026			1
studio white matt	–	SLB/A.0.1-884	2CKA006330A0113			1
black matt	–	SLB/A.0.1-885	2CKA006330A0114			1
aluminium silver	–	SLB/A.0.1-83	2CKA006330A0115			1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion® future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

SD/U12.63.1-825

Touch Display 2.4", 63 x 63 mm, FM **NEW**

Freely programmable touch panel 1 – up to 12-fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system. Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element. With scene function, logic functions, presence simulation and time programs.

Functions:
- A total 12 control elements are displayed on a maximum of 12 pages.
- 12 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4 touch surfaces on one page
- Primary function
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000 / 6226/T)

External power supply needed: 20-32 V DC (SELV)
Number of bus subscribers: 1
Optional Removal protection: TZE/U.0.xx.CK

Display size: 6.10 cm (2.4")
Display resolution: 240*240
Display screen: IPS display
Dimensions (L x W x D): (63 mm x 63 mm x 32 mm)
Display surface: glass black (-825)

Class of temperature controller 1 Contribution to space heating energy efficiency 1,0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	SD/U12.63.1-825	2TMA310011B0002		0.0076	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion®
future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

KK/U4.63.1

Control Element, 63 x 63 mm NEW

Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback. Communication over separat bus coupler unit (BAU-F-0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind/shutter control, scene.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK
Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.63.1	2CKA006115A0504		0.0271	1

BAU-F-0.1

Bus Coupling Unit free@home NEW

Bus coupler unit for keypad 1- up to 4-fold devices: KK/U4.55.1, KK/U4.63.1 and KK/U4.70.1.
Bus connection via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	BAU-F-0.1	2CKA006220A0999		0.121	1

LFW/A.0.63.1-CK

Cover customized NEW

Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.63.1.)

Ordering possible only with the unique design ID.
The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
pure plastics	–	LFW/A.0.63.1-CK	2CKA006199A0041		0.0076	1
painted plastics	–	LFW/A.0.63.1-CKL	2CKA006199A0514		0.0076	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion® future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

LFW/A.1.63.1-81

Cover without Icon, 1-fold

NEW

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.1.63.1-81	2CKA006199A0098		0.0076	1
ivory white	–	LFW/A.1.63.1-82	2CKA006199A0099		0.0076	1
aluminium silver	–	LFW/A.1.63.1-83	2CKA006199A0100		0.0076	1
studio white	–	LFW/A.1.63.1-84	2CKA006199A0101		0.0076	1
studio white matt	–	LFW/A.1.63.1-884	2CKA006199A0102		0.0076	1
black matt	–	LFW/A.1.63.1-885	2CKA006199A0103		0.0076	1
stainless steel	–	LFW/A.1.63.1-866	2CKA006199A0105		0.0076	1

LFW/A.2.63.1-81

Cover with Design Line, 2-fold

NEW

Labeling field with design line for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.2.63.1-81	2CKA006199A0107		0.0076	1
aluminium silver	–	LFW/A.2.63.1-83	2CKA006199A0109		0.0076	1
studio white	–	LFW/A.2.63.1-84	2CKA006199A0110		0.0076	1
studio white matt	–	LFW/A.2.63.1-884	2CKA006199A0111		0.0076	1
black matt	–	LFW/A.2.63.1-885	2CKA006199A0112		0.0076	1
stainless steel	–	LFW/A.2.63.1-866	2CKA006199A0114		0.0076	1

LFW/A.3.63.1-81

Cover with Design Line, 3-fold

NEW

Labeling field with design line for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.3.63.1-81	2CKA006199A0116		0.0076	1
ivory white	–	LFW/A.3.63.1-82	2CKA006199A0117		0.0076	1
aluminium silver	–	LFW/A.3.63.1-83	2CKA006199A0118		0.0076	1
studio white	–	LFW/A.3.63.1-84	2CKA006199A0119		0.0076	1
studio white matt	–	LFW/A.3.63.1-884	2CKA006199A0120		0.0076	1
black matt	–	LFW/A.3.63.1-885	2CKA006199A0121		0.0076	1
stainless steel	–	LFW/A.3.63.1-866	2CKA006199A0123		0.0076	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion® future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

LFW/A.1.63.1-81

Cover with Design Line, 4-fold

NEW

Labeling field with design line for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.4.63.1-81	2CKA006199A0125		0.0076	1
aluminium silver	–	LFW/A.4.63.1-83	2CKA006199A0127		0.0076	1
studio white	–	LFW/A.4.63.1-84	2CKA006199A0128		0.0076	1
studio white matt	–	LFW/A.4.63.1-884	2CKA006199A0129		0.0076	1
black matt	–	LFW/A.4.63.1-885	2CKA006199A0130		0.0076	1
stainless steel	–	LFW/A.4.63.1-866	2CKA006199A0132		0.0076	1

LFBT/A.1.63.1-81

Cover with Light Icon, 1-fold Button

NEW

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFBT/A.1.63.1-81	2CKA006199A0134		0.0076	1
ivory white	–	LFBT/A.1.63.1-82	2CKA006199A0135		0.0076	1
aluminium silver	–	LFBT/A.1.63.1-83	2CKA006199A0136		0.0076	1
studio white	–	LFBT/A.1.63.1-84	2CKA006199A0137		0.0076	1
studio white matt	–	LFBT/A.1.63.1-884	2CKA006199A0138		0.0076	1
black matt	–	LFBT/A.1.63.1-885	2CKA006199A0139		0.0076	1
stainless steel	–	LFBT/A.1.63.1-866	2CKA006199A0141		0.0076	1

LFJT/A.1.63.1-81

Cover with Blind Icon, 1-fold Button

NEW

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFJT/A.1.63.1-81	2CKA006199A0143		0.0076	1
aluminium silver	–	LFJT/A.1.63.1-83	2CKA006199A0145		0.0076	1
studio white	–	LFJT/A.1.63.1-84	2CKA006199A0146		0.0076	1
studio white matt	–	LFJT/A.1.63.1-884	2CKA006199A0147		0.0076	1
black matt	–	LFJT/A.1.63.1-885	2CKA006199A0148		0.0076	1
stainless steel	–	LFJT/A.1.63.1-866	2CKA006199A0150		0.0076	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion®
future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

LFBT/A.1.63.1-81

Cover with Scene Icon, 1-fold Button

NEW

Labeling field with scene icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFST/A.1.63.1-81	2CKA006199A0152		0.0076	1
ivory white	–	LFST/A.1.63.1-82	2CKA006199A0153		0.0076	1
aluminium silver	–	LFST/A.1.63.1-83	2CKA006199A0154		0.0076	1
studio white	–	LFST/A.1.63.1-84	2CKA006199A0155		0.0076	1
studio white matt	–	LFST/A.1.63.1-884	2CKA006199A0156		0.0076	1
black matt	–	LFST/A.1.63.1-885	2CKA006199A0157		0.0076	1
stainless steel	–	LFST/A.1.63.1-866	2CKA006199A0159		0.0076	1

LFDW/A.1.63.1-81

Cover with Dim Icon, 1-fold Rocker

NEW

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFDW/A.1.63.1-81	2CKA006199A0263		0.0076	1
aluminium silver	–	LFDW/A.1.63.1-83	2CKA006199A0265		0.0076	1
studio white	–	LFDW/A.1.63.1-84	2CKA006199A0266		0.0076	1
studio white matt	–	LFDW/A.1.63.1-884	2CKA006199A0267		0.0076	1
black matt	–	LFDW/A.1.63.1-885	2CKA006199A0268		0.0076	1
stainless steel	–	LFDW/A.1.63.1-866	2CKA006199A0270		0.0076	1

LFJW/A.1.63.1-81

Cover with Blind Icon, 1-fold Rocker

NEW

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFJW/A.1.63.1-81	2CKA006199A0271		0.0076	1
ivory white	–	LFJW/A.1.63.1-82	2CKA006199A0272		0.0076	1
aluminium silver	–	LFJW/A.1.63.1-83	2CKA006199A0273		0.0076	1
studio white	–	LFJW/A.1.63.1-84	2CKA006199A0274		0.0076	1
studio white matt	–	LFJW/A.1.63.1-884	2CKA006199A0275		0.0076	1
black matt	–	LFJW/A.1.63.1-885	2CKA006199A0276		0.0076	1
stainless steel	–	LFJW/A.1.63.1-866	2CKA006199A0278		0.0076	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion® future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

LFAW/A.1.63.1-81

Cover with Up/Down Icon, 1-fold Button

NEW

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFAW/A.1.63.1-81	2CKA006199A0279		0.0076	1
aluminium silver	–	LFAW/A.1.63.1-83	2CKA006199A0281		0.0076	1
studio white	–	LFAW/A.1.63.1-84	2CKA006199A0282		0.0076	1
studio white matt	–	LFAW/A.1.63.1-884	2CKA006199A0283		0.0076	1
black matt	–	LFAW/A.1.63.1-885	2CKA006199A0284		0.0076	1
stainless steel	–	LFAW/A.1.63.1-866	2CKA006199A0286		0.0076	1

LFBT/A.2.63.1-81

Cover with LIght Icon, 2-fold Button

NEW

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFBT/A.2.63.1-81	2CKA006199A0287		0.0076	1
ivory white	–	LFBT/A.2.63.1-82	2CKA006199A0288		0.0076	1
aluminium silver	–	LFBT/A.2.63.1-83	2CKA006199A0289		0.0076	1
studio white	–	LFBT/A.2.63.1-84	2CKA006199A0290		0.0076	1
studio white matt	–	LFBT/A.2.63.1-884	2CKA006199A0291		0.0076	1
black matt	–	LFBT/A.2.63.1-885	2CKA006199A0292		0.0076	1
stainless steel	–	LFBT/A.2.63.1-866	2CKA006199A0294		0.0076	1

LFJT/A.2.63.1-81

Cover with Blind Icon, 2-fold Button

NEW

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFJT/A.2.63.1-81	2CKA006199A0295		0.0076	1
aluminium silver	–	LFJT/A.2.63.1-83	2CKA006199A0297		0.0076	1
studio white	–	LFJT/A.2.63.1-84	2CKA006199A0298		0.0076	1
studio white matt	–	LFJT/A.2.63.1-884	2CKA006199A0299		0.0076	1
black matt	–	LFJT/A.2.63.1-885	2CKA006199A0300		0.0076	1
stainless steel	–	LFJT/A.2.63.1-866	2CKA006199A0302		0.0076	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion® future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

LFST/A.2.63.1-81

Cover with Scene Icon, 2-fold Button

NEW

Labeling field with scene icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFST/A.2.63.1-81	2CKA006199A0303		0.0076	1
ivory white	–	LFST/A.2.63.1-82	2CKA006199A0304		0.0076	1
aluminium silver	–	LFST/A.2.63.1-83	2CKA006199A0305		0.0076	1
studio white	–	LFST/A.2.63.1-84	2CKA006199A0306		0.0076	1
studio white matt	–	LFST/A.2.63.1-884	2CKA006199A0307		0.0076	1
black matt	–	LFST/A.2.63.1-885	2CKA006199A0308		0.0076	1
stainless steel	–	LFST/A.2.63.1-866	2CKA006199A0310		0.0076	1

LFDW/A.2.63.1-81

Cover with Dim/Blind Icon, 2-fold Rocker

NEW

Labeling field with one dimming- and one blind-icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFDW/A.2.63.1-81	2CKA006199A0311		0.0076	1
aluminium silver	–	LFDW/A.2.63.1-83	2CKA006199A0313		0.0076	1
studio white	–	LFDW/A.2.63.1-84	2CKA006199A0314		0.0076	1
studio white matt	–	LFDW/A.2.63.1-884	2CKA006199A0315		0.0076	1
black matt	–	LFDW/A.2.63.1-885	2CKA006199A0316		0.0076	1
stainless steel	–	LFDW/A.2.63.1-866	2CKA006199A0318		0.0076	1

LFAW/A.2.63.1-81

Cover with Up/Down Icon, 2-fold Rocker

NEW

Labeling field with two up/down icons for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFAW/A.2.63.1-81	2CKA006199A0319		0.0076	1
ivory white	–	LFAW/A.2.63.1-82	2CKA006199A0320		0.0076	1
aluminium silver	–	LFAW/A.2.63.1-83	2CKA006199A0321		0.0076	1
studio white	–	LFAW/A.2.63.1-84	2CKA006199A0322		0.0076	1
studio white matt	–	LFAW/A.2.63.1-884	2CKA006199A0323		0.0076	1
black matt	–	LFAW/A.2.63.1-885	2CKA006199A0324		0.0076	1
stainless steel	–	LFAW/A.2.63.1-866	2CKA006199A0326		0.0076	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion® future® linear/solo®/carat®/pure stainless steel/Busch-axcent®/Dynasty®

LFMW/A.4.63.1-81

Cover with Music Icon, 4-fold Button

NEW

Labeling field with Stop/Play/Volume icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFMW/A.4.63.1-81	2CKA006199A0327		0.0076	1
ivory white	–	LFMW/A.4.63.1-82	2CKA006199A0328		0.0076	1
aluminium silver	–	LFMW/A.4.63.1-83	2CKA006199A0329		0.0076	1
studio white	–	LFMW/A.4.63.1-84	2CKA006199A0330		0.0076	1
studio white matt	–	LFMW/A.4.63.1-884	2CKA006199A0331		0.0076	1
black matt	–	LFMW/A.4.63.1-885	2CKA006199A0332		0.0076	1
stainless steel	–	LFMW/A.4.63.1-866	2CKA006199A0334		0.0076	1

CSE/U0.1.1.CK

Removal protection

NEW

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CSE/U0.1.1.CK	2CKA006199A0512			1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion®
Busch-art linear®/ALBA

SD/U12.70.1-4015

Touch Display 2.4", 70 x 70 mm, FM **NEW**

Freely programmable touch panel 1 – up to 12-fold featuring a 2.4-inch IPS screen with 240*240 resolution that offers home control and monitoring of the free@home, or KNX system. Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element. With scene function, logic functions, presence simulation and time programs.

Functions:
- A total 12 control elements are displayed on a maximum of 12 pages.
- 18 fault and alarm messages
- 10 logic functions
- 10 weekly timers
- 10 scene actuators
- 1 integrated temperature controller (RTC)
- Page display with a maximum of 4touch surfaces on one page
- Primary function
- Integrated temperature sensor
- Haptic feedback
- Proximity sensor
- Brightness sensor
- 1 binary input or external temperature sensor input (PT1000 / 6226/T)

External power supply needed: 20-32 V DC (SELV)
Number of bus subscribers: 1
Optional Removal protection: TZE/U.0.xx.CK

Display size: 6.10 cm (2.4")
Display resolution: 240*240
Display screen: IPS display
Dimensions (L x W x D): (69.5 mm x 69.5 mm x 32 mm)
Display surface: glass black (-825)

Class of temperature controller 1 Contribution to space heating energy efficiency 1,0 %.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
glass black	–	SD/U12.70.1-4015	2TMA310011B0004		0.078	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion®
Busch-art linear®/ALBA

KK/U4.70.1

Control Element, 70 x 70 mm NEW

Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback. Communication over separat bus coupler unit (BAU-F-0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind/shutter control, scene.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK
Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.70.1	2CKA006115A0510		0.11586	1

BAU-F-0.1

Bus Coupling Unit free@home NEW

Bus coupler unit for keypad 1- up to 4-fold devices: KK/U4.55.1, KK/U4.63.1 and KK/U4.70.1.
Bus connection via enclosed terminal block.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	BAU-F-0.1	2CKA006220A0999		0.121	1

LFW/A.0.70.1-CK

Cover customized NEW

Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.70.1.)

Ordering possible only with the unique design ID.
The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
pure plastics	–	LFW/A.0.70.1-CK	2CKA006199A0025		0.011586	1
painted plastics	–	LFW/A.0.70.1-CKL	2CKA006199A0519		0.011586	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion®
Busch-art linear®/ALBA

LFW/A.1.70.1-44G

Cover without Icon, 1-fold NEW

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.1.70.1-44G	2CKA006199A0435		0.011586	1
white matt	–	LFW/A.1.70.1-44M	2CKA006199A0451		0.011586	1
black matt	–	LFW/A.1.70.1-45M	2CKA006199A0483		0.011586	1

LFW/A.2.70.1-44G

Cover with Design Line, 2-fold NEW

Labeling field with design line for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.2.70.1-44G	2CKA006199A0436		0.011586	1
white matt	–	LFW/A.2.70.1-44M	2CKA006199A0452		0.011586	1
black matt	–	LFW/A.2.70.1-45M	2CKA006199A0484		0.011586	1

LFW/A.3.70.1-44G

Cover with Design Line, 3-fold NEW

Labeling field with design line for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.3.70.1-44G	2CKA006199A0437		0.011586	1
white matt	–	LFW/A.3.70.1-44M	2CKA006199A0453		0.011586	1
black matt	–	LFW/A.3.70.1-45M	2CKA006199A0485		0.011586	1

LFW/A.4.70.1-44G

Cover with Design Line, 4-fold NEW

Labeling field with design line for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.4.70.1-44G	2CKA006199A0438		0.011586	1
white matt	–	LFW/A.4.70.1-44M	2CKA006199A0454		0.011586	1
black matt	–	LFW/A.4.70.1-45M	2CKA006199A0486		0.011586	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion®
Busch-art linear®/ALBA

LFB/A.1.70.1-44G

Cover with Light Icon, 1-fold Button

NEW

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFB/A.1.70.1-44G	2CKA006199A0439		0.011586	1
white matt	–	LFB/A.1.70.1-44M	2CKA006199A0455		0.011586	1
black matt	–	LFB/A.1.70.1-45M	2CKA006199A0487		0.011586	1

LFJ/A.1.70.1-44G

Cover with Blind Icon, 1-fold Button

NEW

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFJ/A.1.70.1-44G	2CKA006199A0440		0.011586	1
white matt	–	LFJ/A.1.70.1-44M	2CKA006199A0456		0.011586	1
black matt	–	LFJ/A.1.70.1-45M	2CKA006199A0488		0.011586	1

LFS/A.1.70.1-44G

Cover with Scene Icon, 1-fold Button

NEW

Labeling field with one scene icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFS/A.1.70.1-44G	2CKA006199A0441		0.011586	1
white matt	–	LFS/A.1.70.1-44M	2CKA006199A0457		0.011586	1
black matt	–	LFS/A.1.70.1-45M	2CKA006199A0489		0.011586	1

LFDW/A.1.70.1-44G

Cover with Dim Icon, 1-fold Rocker

NEW

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFDW/A.1.70.1-44G	2CKA006199A0442		0.011586	1
white matt	–	LFDW/A.1.70.1-44M	2CKA006199A0458		0.011586	1
black matt	–	LFDW/A.1.70.1-45M	2CKA006199A0490		0.011586	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion®
Busch-art linear®/ALBA

LFJW/A.1.70.1-44G

Cover with Blind Icon, 1-fold Rocker NEW

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFJW/A.1.70.1-44G	2CKA006199A0443		0.011586	1
white matt	–	LFJW/A.1.70.1-44M	2CKA006199A0459		0.011586	1
black matt	–	LFJW/A.1.70.1-45M	2CKA006199A0491		0.011586	1

LFAW/A.1.70.1-44G

Cover with Up/Down Icon, 1-fold Rocker NEW

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFAW/A.1.70.1-44G	2CKA006199A0444		0.011586	1
white matt	–	LFAW/A.1.70.1-44M	2CKA006199A0460		0.011586	1
black matt	–	LFAW/A.1.70.1-45M	2CKA006199A0492		0.011586	1

LFBT/A.2.70.1-44G

Cover with Light Icon, 2-fold Button NEW

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFBT/A.2.70.1-44G	2CKA006199A0445		0.011586	1
white matt	–	LFBT/A.2.70.1-44M	2CKA006199A0461		0.011586	1
black matt	–	LFBT/A.2.70.1-45M	2CKA006199A0493		0.011586	1

LFJT/A.2.70.1-44G

Cover with Blind Icon, 2-fold Button NEW

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFJT/A.2.70.1-44G	2CKA006199A0446		0.011586	1
white matt	–	LFJT/A.2.70.1-44M	2CKA006199A0462		0.011586	1
black matt	–	LFJT/A.2.70.1-45M	2CKA006199A0494		0.011586	1

ABB-free@home®

User Operation – Design Ranges – ABB Trevion®
Busch-art linear®/ALBA

LFST/A.2.70.1-44G

Cover with Scene Icon, 2-fold Button

NEW

Labeling field with scene icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFST/A.2.70.1-44G	2CKA006199A0447		0.011586	1
white matt	–	LFST/A.2.70.1-44M	2CKA006199A0463		0.011586	1
black matt	–	LFST/A.2.70.1-45M	2CKA006199A0495		0.011586	1

LFDW/A.2.70.1-44G

Cover with Dim/Blind Icon, 2-fold Rocker

NEW

Labeling field with one dimming- and one blind-icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFDW/A.2.70.1-44G	2CKA006199A0448		0.011586	1
white matt	–	LFDW/A.2.70.1-44M	2CKA006199A0464		0.011586	1
black matt	–	LFDW/A.2.70.1-45M	2CKA006199A0496		0.011586	1

LFAW/A.2.70.1-44G

Cover with Up/Down Icon, 2-fold Rocker

NEW

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFAW/A.2.70.1-44G	2CKA006199A0449		0.011586	1
white matt	–	LFAW/A.2.70.1-44M	2CKA006199A0465		0.011586	1
black matt	–	LFAW/A.2.70.1-45M	2CKA006199A0497		0.011586	1

LFMW/A.4.70.1-44G

Cover with Music Icon, 4-fold Button

NEW

Labeling field with Stop/Play/Volume icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFMW/A.4.70.1-44G	2CKA006199A0450		0.011586	1
white matt	–	LFMW/A.4.70.1-44M	2CKA006199A0466		0.011586	1
black matt	–	LFMW/A.4.70.1-45M	2CKA006199A0498		0.011586	1

CSE/U0.1.1.CK

Removal protection

NEW

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
	–	CSE/U0.1.1.CK	2CKA006199A0512			1

ABB-free@home®
Installation Standards

VDE

— 01
— 02
— 03
— 04

— 01 Sensor insert
— 02 Rocker, 1gang
— 03 Cover frame, 1/1gang
— 04 Sensor unit

British standard

— 01
— 02
— 03
— 04

— 01 Switch actuator
— 02 Rocker, 2 fold push buttons
— 03 Frame
— 04 ABB-free@home® Switch Sensor 1/2gang KNX

NEMA

— 01
— 02
— 03
— 04
— 05

— 01 Metal Mounting Frame
— 02 Sensor insert, 1/2gang
— 03 Cover plate, 2 fold
— 04 Frame
— 05 Sensor unit

Italian standard

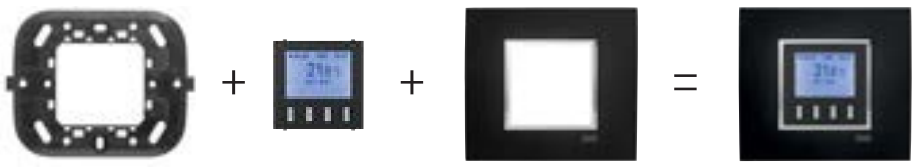

— 01
— 02
— 03
— 04

— 01 2 modules mounting grid
— 02 2 modules ABB-free@home® device
— 03 2 modules frame
— 04 ABB-free@home® RTC Unit

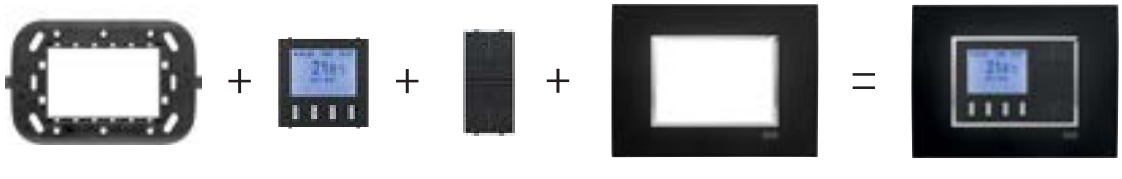

— 01
— 02
— 03
— 04
— 05

— 01 3 modules mounting grid
— 02 2 modules ABB-free@home® device
— 03 1 module ABB-free@home® device
— 04 3 modules frame
— 05 ABB-free@home® RTC and actuator unit

ABB-free@home®

Sensor unit



Sensor unit, 1gang [1) 2)]

For transmitting switching, push-button, dimming and blind commands
to an ABB-free@home® actuator.
Only to be used in combination with ABB-free@home® 1gang rockers.
The bus can be connected via enclosed terminal block.
Control element: Switch contacts top/bottom
Display elements: LED as light for orientation or display of the switching state
Bus voltage: 24 V
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 23 mm
Mounting depth: 9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	180075	SU-F-1.0.1	2CKA006220A0117			1

Sensor unit, 2gang [1) 2)]

For transmitting switching, push-button, dimming and blind commands
to an ABB-free@home® actuator.
Only to be used in combination with ABB-free@home® 2gang rockers.
The bus can be connected via enclosed terminal block.
Control element: Switch contacts top/bottom
Display elements: LED as light for orientation or display of the switching state
Bus voltage: 24 V
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 23 mm
Mounting depth: 9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	180082	SU-F-2.0.1	2CKA006220A0118			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.

ABB-free@home®

VDE

Rocker
1gang, without printing
As cover for ABB-free@home® sensor units and sensor/actuator units

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181492	SR-1-81	2CKA006220A0137			1
82 ivory white	203453	SR-1-82	2CKA006220A0516			1
84 studio white	181836	SR-1-84	2CKA006220A0139			1
840 antique brass	195598	SR-1-840	2CKA006220A0371			1
866 stainless steel	203699	SR-1-866	2CKA006220A0533			1
884 studiowhite matt	204337	SR-1-884	2CKA006220A0601			1
885 black matt	204511	SR-1-885	2CKA006220A0618			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204689	SR-1-92	2CKA006220A0635			1
93 champagne	204856	SR-1-93	2CKA006220A0652			1
94 alpine white	205006	SR-1-94	2CKA006220A0669			1
95 chateau-black	205150	SR-1-95	2CKA006220A0686			1
96 chalet white	205365	SR-1-96	2CKA006220A0703			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A01000 03	2CHH621000A4003			1
Grey	6220H-A01000 16	2CHH621000A4016			1
Macchiato	6220H-A01000 18	2CHH621000A4018			1
Anthracite	6220H-A01000 63	2CHH621000A4063			1
Steel	6220H-A01000 69	2CHH621000A4069			1
Titanium	6220H-A01000 70	2CHH621000A4070			1

Sky

Color	Bbn 8427238 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	146270	SR-1-85AI	2CLA852620A1401			1
BL Soft White	135205	SR-1-85BL	2CLA852620A1101			1
NS Soft Black	146287	SR-1-85NS	2CLA852620A1501			1
PL Silver	135212	SR-1-85PL	2CLA852620A1301			1

ABB-free@home®

VDE

Rocker
1gang, with “Light” icon
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180754	SRL-1-212	2CKA006220A0184			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181140	SRL-1-214	2CKA006220A0185			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181515	SRL-1-81	2CKA006220A0140			1
82 ivory white	203460	SRL-1-82	2CKA006220A0517			1
84 studio white	181843	SRL-1-84	2CKA006220A0142			1
840 antique brass	195604	SRL-1-840	2CKA006220A0372			1
866 stainless steel	203705	SRL-1-866	2CKA006220A0534			1
884 studio white matt	204344	SRL-1-884	2CKA006220A0602			1
885 black matt	204528	SRL-1-885	2CKA006220A0619			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204696	SRL-1-92	2CKA006220A0636			1
94 alpine white	205013	SRL-1-94	2CKA006220A0670			1
95 chateau-black	205167	SRL-1-95	2CKA006220A0687			1
96 chalet white	205372	SRL-1-96	2CKA006220A0704			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A01001 03	2CHH621001A4003			1
Grey	6220H-A01001 16	2CHH621001A4016			1
Macchiato	6220H-A01001 18	2CHH621001A4018			1
Onyx	6220H-A01001 63	2CHH621001A4063			1
Steel	6220H-A01001 69	2CHH621001A4069			1
Titanium	6220H-A01001 70	2CHH621001A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	144955	SRL-1-85AI	2CLA852626A1401			1
BL Soft White	144931	SRL-1-85BL	2CLA852626A1101			1
NS Soft Black	144962	SRL-1-85NS	2CLA852626A1501			1
PL Silver	144948	SRL-1-85PL	2CLA852626A1301			1

ABB-free@home®

VDE

Rocker
1gang, with “Blind” icon
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180761	SRB-1-212	2CKA006220A0186			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181157	SRB-1-214	2CKA006220A0187			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 antracite	181522	SRB-1-81	2CKA006220A0143			1
82 ivory white	203477	SRB-1-82	2CKA006220A0518			1
84 studio white	181850	SRB-1-84	2CKA006220A0145			1
840 antique brass	195611	SRB-1-840	2CKA006220A0373			1
866 stainless steel	203712	SRB-1-866	2CKA006220A0535			1
884 studio white matt	204368	SRB-1-884	2CKA006220A0603			1
885 black matt	204535	SRB-1-885	2CKA006220A0620			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204719	SRB-1-92	2CKA006220A0637			1
94 alpine white	205020	SRB-1-94	2CKA006220A0671			1
95 chateau-black	205174	SRB-1-95	2CKA006220A0688			1
96 chalet white	205389	SRB-1-96	2CKA006220A0705			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A01002 03	2CHH621002A4003			1
Grey	6220H-A01002 16	2CHH621002A4016			1
Macchiato	6220H-A01002 18	2CHH621002A4018			1
Onyx	6220H-A01002 63	2CHH621002A4063			1
Steel	6220H-A01002 69	2CHH621002A4069			1
Titanium	6220H-A01002 70	2CHH621002A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	144993	SRB-1-85AI	2CLA852623A1401			1
BL Soft White	144979	SRB-1-85BL	2CLA852623A1101			1
NS Soft Black	145006	SRB-1-85NS	2CLA852623A1501			1
PL Silver	144986	SRB-1-85PL	2CLA852623A1301			1

ABB-free@home®

VDE

Rocker
1gang, with “Scene” icon
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180778	SRS-1-212	2CKA006220A0188			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181171	SRS-1-214	2CKA006220A0189			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181539	SRS-1-81	2CKA006220A0146			1
82 ivory white	203484	SRS-1-82	2CKA006220A0519			1
84 studio white	181867	SRS-1-84	2CKA006220A0148			1
840 antique brass	195628	SRS-1-840	2CKA006220A0374			1
866 stainless steel	203729	SRS-1-866	2CKA006220A0536			1
884 studio white matt	204351	SRS-1-884	2CKA006220A0604			1
885 black matt	204542	SRS-1-885	2CKA006220A0621			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204726	SRS-1-92	2CKA006220A0638			1
94 alpine white	205037	SRS-1-94	2CKA006220A0672			1
95 chateau-black	205181	SRS-1-95	2CKA006220A0689			1
96 chalet white	205396	SRS-1-96	2CKA006220A0706			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A01003 03	2CHH621003A4003			1
Grey	6220H-A01003 16	2CHH621003A4016			1
Macchiato	6220H-A01003 18	2CHH621003A4018			1
Anthracite	6220H-A01003 63	2CHH621003A4063			1
Steel	6220H-A01003 69	2CHH621003A4069			1
Silver	6220H-A01003 70	2CHH621003A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	145075	SRS-1-85AI	2CLA852627A1401			1
BL Soft White	145051	SRS-1-85BL	2CLA852627A1101			1
NS Soft Black	145082	SRS-1-85NS	2CLA852627A1501			1
PL Silver	145068	SRS-1-85PL	2CLA852627A1301			1

ABB-free@home®

VDE

Rocker
1gang, with “Dimmer” icon
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180785	SRD-1-212	2CKA006220A0190			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181188	SRD-1-214	2CKA006220A0191			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181546	SRD-1-81	2CKA006220A0149			1
82 ivory white	203491	SRD-1-82	2CKA006220A0520			1
84 studio white	181874	SRD-1-84	2CKA006220A0151			1
840 antique brass	195635	SRD-1-840	2CKA006220A0375			1
866 stainless steel	203743	SRD-1-866	2CKA006220A0537			1
884 studiowhite matt	204382	SRD-1-884	2CKA006220A0605			1
885 black matt	204559	SRD-1-885	2CKA006220A0622			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204733	SRD-1-92	2CKA006220A0639			1
94 alpine white	205044	SRD-1-94	2CKA006220A0673			1
95 chateau-black	205198	SRD-1-95	2CKA006220A0690			1
96 chalet white	205402	SRD-1-96	2CKA006220A0707			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A01004 03	2CHH621004A4003			1
Grey	6220H-A01004 16	2CHH621004A4016			1
Macchiato	6220H-A01004 18	2CHH621004A4018			1
Anthracite	6220H-A01004 63	2CHH621004A4063			1
Steel	6220H-A01004 69	2CHH621004A4069			1
Silver	6220H-A01004 70	2CHH621004A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	145037	SRD-1-85AI	2CLA852625A1401			1
BL Soft White	145013	SRD-1-85BL	2CLA852625A1101			1
NS Soft Black	145044	SRD-1-85NS	2CLA852625A1501			1
PL Silver	145020	SRD-1-85PL	2CLA852625A1301			1

ABB-free@home®

VDE

Rocker
2gang left/right, without printing
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180792	SR-2-212	2CKA006220A0192			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181195	SR-2-214	2CKA006220A0193			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181553	SR-2-81	2CKA006220A0152			1
82 ivory white	203507	SR-2-82	2CKA006220A0521			1
84 studio white	181881	SR-2-84	2CKA006220A0154			1
840 antique brass	195642	SR-2-840	2CKA006220A0376			1
866 stainless steel	203750	SR-2-866	2CKA006220A0538			1
884 studiowhite matt	204399	SR-2-884	2CKA006220A0606			1
885 black matt	204566	SR-2-885	2CKA006220A0623			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204740	SR-2-92	2CKA006220A0640			1
94 alpine white	205051	SR-2-94	2CKA006220A0674			1
95 chateau-black	205204	SR-2-95	2CKA006220A0691			1
96 chalet white	205419	SR-2-96	2CKA006220A0708			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A02000 03	2CHH622000A4003			1
Grey	6220H-A02000 16	2CHH622000A4016			1
Macchiato	6220H-A02000 18	2CHH622000A4018			1
Anthracite	6220H-A02000 63	2CHH622000A4063			1
Steel	6220H-A02000 69	2CHH622000A4069			1
Silver	6220H-A02000 70	2CHH622000A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	146294	SR-2-85AI	2CLA852640A1401			1
BL Soft White	135229	SR-2-85BL	2CLA852640A1101			1
NS Soft Black	146300	SR-2-85NS	2CLA852640A1501			1
PL Silver	135236	SR-2-85PL	2CLA852640A1301			1

ABB-free@home®

VDE

Rocker
2gang left, with “Light” icon
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180808	SRL-2-L-212	2CKA006220A0194			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181218	SRL-2-L-214	2CKA006220A0195			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181560	SRL-2-L-81	2CKA006220A0155			1
82 ivory white	203606	SRL-2-L-82	2CKA006220A0522			1
84 studio white	181898	SRL-2-L-84	2CKA006220A0157			1
840 antique brass	195659	SRL-2-L-840	2CKA006220A0377			1
866 stainless steel	203767	SRL-2-L-866	2CKA006220A0539			1
884 studiowhite matt	204412	SRL-2-L-884	2CKA006220A0607			1
885 black matt	204573	SRL-2-L-885	2CKA006220A0624			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204757	SRL-2-L-92	2CKA006220A0641			1
94 alpine white	205068	SRL-2-L-94	2CKA006220A0675			1
95 chateau-black	205211	SRL-2-L-95	2CKA006220A0692			1
96 chalet white	205426	SRL-2-L-96	2CKA006220A0709			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A02101 03	2CHH622101A4003			1
Grey	6220H-A02101 16	2CHH622101A4016			1
Macchiato	6220H-A02101 18	2CHH622101A4018			1
Anthracite	6220H-A02101 63	2CHH622101A4063			1
Steel	6220H-A02101 69	2CHH622101A4069			1
Silver	6220H-A02101 70	2CHH622101A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	145112	SRL-2-L-85AI	2CLA852642A1401			1
BL Soft White	145099	SRL-2-L-85BL	2CLA852642A1101			1
NS Soft Black	145129	SRL-2-L-85NS	2CLA852642A1501			1
PL Silver	145105	SRL-2-L-85PL	2CLA852642A1301			1

ABB-free@home®

VDE

Rocker
2gang left/right, “Blind” icon
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180815	SRB-2-212	2CKA006220A0196			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181225	SRB-2-214	2CKA006220A0197			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181577	SRB-2-81	2CKA006220A0158			1
82 ivory white	203613	SRB-2-82	2CKA006220A0523			1
84 studio white	181911	SRB-2-84	2CKA006220A0160			1
840 antique brass	195666	SRB-2-840	2CKA006220A0378			1
866 stainless steel	203774	SRB-2-866	2CKA006220A0540			1
884 studiowhite matt	204429	SRB-2-884	2CKA006220A0608			1
885 black matt	204580	SRB-2-885	2CKA006220A0625			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204764	SRB-2-92	2CKA006220A0642			1
94 alpine white	205075	SRB-2-94	2CKA006220A0676			1
95 chateau-black	205228	SRB-2-95	2CKA006220A0693			1
96 chalet white	205433	SRB-2-96	2CKA006220A0710			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A02002 03	2CHH622002A4003			1
Grey	6220H-A02002 16	2CHH622002A4016			1
Macchiato	6220H-A02002 18	2CHH622002A4018			1
Anthracite	6220H-A02002 63	2CHH622002A4063			1
Steel	6220H-A02002 69	2CHH622002A4069			1
Silver	6220H-A02002 70	2CHH622002A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	145556	SRB-2-85AI	2CLA852643A1401			1
BL Soft White	145532	SRB-2-85BL	2CLA852643A1101			1
NS Soft Black	145563	SRB-2-85NS	2CLA852643A1501			1
PL Silver	145549	SRB-2-85PL	2CLA852643A1301			1

ABB-free@home®

VDE

Rocker
2gang left, with “Scene” icon
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180839	SRS-2-L-212	2CKA006220A0198			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181232	SRS-2-L-214	2CKA006220A0199			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181584	SRS-2-L-81	2CKA006220A0161			1
82 ivory white	203620	SRS-2-L-82	2CKA006220A0524			1
84 studio white	181928	SRS-2-L-84	2CKA006220A0163			1
840 antique brass	195673	SRS-2-L-840	2CKA006220A0379			1
866 stainless steel	203781	SRS-2-L-866	2CKA006220A0541			1
884 studiowhite matt	204436	SRS-2-L-884	2CKA006220A0609			1
885 black matt	204597	SRS-2-L-885	2CKA006220A0626			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204788	SRS-2-L-92	2CKA006220A0643			1
94 alpine white	205082	SRS-2-L-94	2CKA006220A0677			1
95 chateau-black	205235	SRS-2-L-95	2CKA006220A0694			1
96 chalet white	205440	SRS-2-L-96	2CKA006220A0711			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A02103 03	2CHH622103A4003			1
Grey	6220H-A02103 16	2CHH622103A4016			1
Macchiato	6220H-A02103 18	2CHH622103A4018			1
Anthracite	6220H-A02103 63	2CHH622103A4063			1
Steel	6220H-A02103 69	2CHH622103A4069			1
Silver	6220H-A02103 70	2CHH622103A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	145310	SRS-2-L-85AI	2CLA852644A1401			1
BL Soft White	145297	SRS-2-L-85BL	2CLA852644A1101			1
NS Soft Black	145327	SRS-2-L-85NS	2CLA852644A1501			1
PL Silver	145303	SRS-2-L-85PL	2CLA852644A1301			1

ABB-free@home®

VDE

Rocker
2gang left, with “Dimmer” icon
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180846	SRD-2-L-212	2CKA006220A0200			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181249	SRD-2-L-214	2CKA006220A0201			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181591	SRD-2-L-81	2CKA006220A0164			1
82 ivory white	203637	SRD-2-L-82	2CKA006220A0525			1
84 studio white	181935	SRD-2-L-84	2CKA006220A0166			1
840 antique brass	195680	SRD-2-L-840	2CKA006220A0380			1
866 stainless steel	203798	SRD-2-L-866	2CKA006220A0542			1
884 studiowhite matt	204443	SRD-2-L-884	2CKA006220A0610			1
885 black matt	204610	SRD-2-L-885	2CKA006220A0627			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204795	SRD-2-L-92	2CKA006220A0644			1
94 alpine white	205099	SRD-2-L-94	2CKA006220A0678			1
95 chateau-black	205242	SRD-2-L-95	2CKA006220A0695			1
96 chalet white	205457	SRD-2-L-96	2CKA006220A0712			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A02104 03	2CHH622104A4003			1
Grey	6220H-A02104 16	2CHH622104A4016			1
Macchiato	6220H-A02104 18	2CHH622104A4018			1
Anthracite	6220H-A02104 63	2CHH622104A4063			1
Steel	6220H-A02104 69	2CHH622104A4069			1
Silver	6220H-A02104 70	2CHH622104A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	145235	SRD-2-L-85AI	2CLA852641A1401			1
BL Soft White	145211	SRD-2-L-85BL	2CLA852641A1101			1
NS Soft Black	145242	SRD-2-L-85NS	2CLA852641A1501			1
PL Silver	145228	SRD-2-L-85PL	2CLA852641A1301			1

ABB-free@home®

VDE

Rocker
2gang right, with “Light” icon
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180853	SRL-2-R-212	2CKA006220A0202			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181263	SRL-2-R-214	2CKA006220A0203			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181614	SRL-2-R-81	2CKA006220A0167			1
82 ivory white	203651	SRL-2-R-82	2CKA006220A0527			1
84 studio white	181942	SRL-2-R-84	2CKA006220A0169			1
840 antique brass	195697	SRL-2-R-840	2CKA006220A0381			1
866 stainless steel	203828	SRL-2-R-866	2CKA006220A0544			1
884 studiowhite matt	204467	SRL-2-R-884	2CKA006220A0612			1
885 black matt	204634	SRL-2-R-885	2CKA006220A0629			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204818	SRL-2-R-92	2CKA006220A0646			1
94 alpine white	205112	SRL-2-R-94	2CKA006220A0680			1
95 chateau-black	205266	SRL-2-R-95	2CKA006220A0697			1
96 chalet white	205471	SRL-2-R-96	2CKA006220A0714			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A02101 03	2CHH622101A4003			1
Grey	6220H-A02101 16	2CHH622101A4016			1
Macchiato	6220H-A02101 18	2CHH622101A4018			1
Anthracite	6220H-A02101 63	2CHH622101A4063			1
Steel	6220H-A02101 69	2CHH622101A4069			1
Silver	6220H-A02101 70	2CHH622101A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	145150	SRL-2-R-85AI	2CLA852648A1401			1
BL Soft White	145136	SRL-2-R-85BL	2CLA852648A1101			1
NS Soft Black	145167	SRL-2-R-85NS	2CLA852648A1501			1
PL Silver	145143	SRL-2-R-85PL	2CLA852648A1301			1

ABB-free@home®

VDE

Rocker
2gang right, with “Scene” icon
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180884	SRS-2-R-212	2CKA006220A0206			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181287	SRS-2-R-214	2CKA006220A0207			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181638	SRS-2-R-81	2CKA006220A0173			1
82 ivory white	203668	SRS-2-R-82	2CKA006220A0528			1
84 studio white	181966	SRS-2-R-84	2CKA006220A0175			1
840 antique brass	195710	SRS-2-R-840	2CKA006220A0382			1
866 stainless steel	203835	SRS-2-R-866	2CKA006220A0545			1
884 studiowhite matt	204474	SRS-2-R-884	2CKA006220A0613			1
885 black matt	204641	SRS-2-R-885	2CKA006220A0630			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204825	SRS-2-R-92	2CKA006220A0647			1
94 alpine white	205129	SRS-2-R-94	2CKA006220A0681			1
95 chateau-black	205273	SRS-2-R-95	2CKA006220A0698			1
96 chalet white	205488	SRS-2-R-96	2CKA006220A0715			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A02203 03	2CHH622203A4003			1
Grey	6220H-A02203 16	2CHH622203A4016			1
Macchiato	6220H-A02203 18	2CHH622203A4018			1
Anthracite	6220H-A02203 63	2CHH622203A4063			1
Steel	6220H-A02203 69	2CHH622203A4069			1
Silver	6220H-A02203 70	2CHH622203A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	145358	SRS-2-R-85AI	2CLA852649A1401			1
BL Soft White	193595	SRS-2-R-85BL	2CLA852647A1101			1
NS Soft Black	145365	SRS-2-R-85NS	2CLA852649A1501			1
PL Silver	145341	SRS-2-R-85PL	2CLA852649A1301			1

ABB-free@home®

VDE

Rocker
2gang right, with “Dimmer” icon
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	188507	SRD-2-R-212	2CKA006220A0261			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	188514	SRD-2-R-214	2CKA006220A0262			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	188477	SRD-2-R-81	2CKA006220A0258			1
82 ivory white	203644	SRD-2-R-82	2CKA006220A0526			1
84 studio white	188491	SRD-2-R-84	2CKA006220A0260			1
840 antique brass	195727	SRD-2-R-840	2CKA006220A0383			1
866 stainless steel	203811	SRD-2-R-866	2CKA006220A0543			1
884 studiowhite matt	204450	SRD-2-R-884	2CKA006220A0611			1
885 black matt	204627	SRD-2-R-885	2CKA006220A0628			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	204801	SRD-2-R-92	2CKA006220A0645			1
94 alpine white	205105	SRD-2-R-94	2CKA006220A0679			1
95 chateau-black	205259	SRD-2-R-95	2CKA006220A0696			1
96 chalet white	205464	SRD-2-R-96	2CKA006220A0713			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A02104 03	2CHH622104A4003			1
Grey	6220H-A02104 16	2CHH622104A4016			1
Macchiato	6220H-A02104 18	2CHH622104A4018			1
Anthracite	6220H-A02104 63	2CHH622104A4063			1
Steel	6220H-A02104 69	2CHH622104A4069			1
Silver	6220H-A02104 70	2CHH622104A4070			1

ABB-free@home®

VDE

Cover plate
For room thermostat
As cover for ABB-free@home® room temperature controller RTC-F-1.

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	180914	CP-RTC-212	2CKA006220A0210			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	181317	CP-RTC-214	2CKA006220A0211			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	181652	CP-RTC-81	2CKA006220A0179			1
82 ivory white	205693	CP-RTC-82	2CKA006220A0529			1
84 studio white	181980	CP-RTC-84	2CKA006220A0181			1
840 antique brass	195734	CP-RTC-840	2CKA006220A0384			1
866 stainless steel	205723	CP-RTC-866	2CKA006220A0546			1
884 studiowhite matt	205815	CP-RTC-884	2CKA006220A0614			1
885 black matt	205839	CP-RTC-885	2CKA006220A0631			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	205853	CP-RTC-92	2CKA006220A0648			1
94 alpine white	205891	CP-RTC-94	2CKA006220A0682			1
95 chateau-black	205921	CP-RTC-95	2CKA006220A0699			1
96 chalet white	205952	CP-RTC-96	2CKA006220A0716			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
White	6220H-A03000 03	2CHH623000A4003			1
Grey	6220H-A03000 16	2CHH623000A4016			1
Macchiato	6220H-A03000 18	2CHH623000A4018			1
Anthracite	6220H-A03000 63	2CHH623000A4063			1
Steel	6220H-A03000 69	2CHH623000A4069			1
Silver	6220H-A03000 70	2CHH623000A4070			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	145433	CP-RTC-85AI	2CLA854060A1401			1
BL Soft White	145419	CP-RTC-85BL	2CLA854060A1101			1
NS Soft Black	145440	CP-RTC-85NS	2CLA854060A1501			1
PL Silver	145426	CP-RTC-85PL	2CLA854060A1301			1

ABB-free@home®

VDE

Cover plate
For room thermostat
As cover for ABB-free@home® room temperature controller RTC-F-1.

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	187487	CP-FCC-212	2CKA006220A0245			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	187494	CP-FCC-214	2CKA006220A0246			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	187456	CP-FCC-81	2CKA006220A0242			1
82 ivory white	205716	CP-FCC-82	2CKA006220A0532			1
84 studio white	187470	CP-FCC-84	2CKA006220A0244			1
866 stainless steel	205730	CP-FCC-866	2CKA006220A0549			1
884 studiowhite matt	205822	CP-FCC-884	2CKA006220A0617			1
885 black matt	205846	CP-FCC-885	2CKA006220A0634			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	205860	CP-FCC-92	2CKA006220A0651			1
94 alpine white	205914	CP-FCC-94	2CKA006220A0685			1
95 chateau-black	205938	CP-FCC-95	2CKA006220A0702			1
96 chalet white	205969	CP-FCC-96	2CKA006220A0719			1

Sky

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
AI Stainless Steel	145471	CP-RTC-FC-85AI	2CLA855420A1401			1
BL Soft White	145457	CP-RTC-FC-85BL	2CLA855420A1101			1
NS Soft Black	145488	CP-RTC-FC-85NS	2CLA855420A1501			1
PL Silver	145464	CP-RTC-FC-85PL	2CLA855420A1301			1

ABB-free@home®

VDE

Cover plate
For 2 fold left push button with play/pause symbol
As cover for ABB-free@home® sensor units and sensor/actuator units

Busch-Duro 2000® SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
212 white	261095	SRA-2-L-212	2CKA006220A0763			1

Reflex SI

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
214 alpine white	257821	SRA-2-L-214	2CKA006220A0765			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
81 anthracite	257722	SRA-2-L-81	2CKA006220A0755			1
82 ivory white	257746	SRA-2-L-82	2CKA006220A0757			1
84 studio white	257784	SRA-2-L-84	2CKA006220A0761			1
840 antique brass	257951	SRA-2-L-840	2CKA006220A0775			1
866 stainless steel	257883	SRA-2-L-866	2CKA006220A0769			1
884 studiowhite matt	261101	SRA-2-L-884	2CKA006220A0771			1
885 black matt	257937	SRA-2-L-885	2CKA006220A0773			1

basic55®

Color	Bbn 4011395 EAN	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
		Type code	Order code			
92 white	257975	SRA-2-L-92	2CKA006220A0777			1
94 alpine white	258019	SRA-2-L-94	2CKA006220A0781			1
95 chateau-black	258033	SRA-2-L-95	2CKA006220A0783			1
96 chalet white	258057	SRA-2-L-96	2CKA006220A0785			1

ABB-free@home®

VDE

Cover plate
For 2 fold right push button with volume symbol
As cover for ABB-free@home® sensor units and sensor/actuator units

Sonos

Busch-Duro 2000® SI

Color	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
212 white	257814	SRA-2-R-212	2CKA006220A0764			1

Reflex SI

Color	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
214 alpine white	257838	SRA-2-R-214	2CKA006220A0766			1

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
81 anthracite	257739	SRA-2-R-81	2CKA006220A0756			1
82 ivory white	257753	SRA-2-R-82	2CKA006220A0758			1
84 studio white	257791	SRA-2-R-84	2CKA006220A0762			1
840 antique brass	257968	SRA-2-R-840	2CKA006220A0776			1
866 stainless steel	257890	SRA-2-R-866	2CKA006220A0770			1
884 studiowhite matt	257920	SRA-2-R-884	2CKA006220A0772			1
885 black matt	257944	SRA-2-R-885	2CKA006220A0774			1

basic55®

Color	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
92 white	257982	SRA-2-R-92	2CKA006220A0778			1
94 alpine white	258026	SRA-2-R-94	2CKA006220A0782			1
95 chateau-black	258040	SRA-2-R-95	2CKA006220A0784			1
96 chalet white	258064	SRA-2-R-96	2CKA006220A0786			1

ABB-free@home®

Room Themosta

Room thermostat [1) 2)]

Heating/cooling operation.
Control element with room temperature controller function for controlling commercially available actuating drives in connection with HA-M-0.6.1, HA-M-0.12.1, FCA-M-2.3.1.
With display of set-value temperature.
Only to be used in combination with ABB-free@home® room temperature controller cover plates CP-RTC-xxx.
The bus can be connected via enclosed terminal block.
Control element: Floating rocker for the selection of set values and operating modes
Display elements: LCD showing operation modes
Bus voltage: 24 V
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 14 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	180099	RTC-F-1	2CKA006220A0122			1

ABB-free@home®

Room Themosta



Room temperature controller with 16A switch actuator wireless **NEW**

Use as a stand-alone controller or within the eco System of ABB free@home®
Heating/cooling operation. RTC control element with room temperature controller function.
6-button touch operation for local operating. Additional functions such as temperature adjustment and timer can be set via ABB free@home Next App.
With temperature display target value. With integrated switching actuator, e.g. for controlling thermoelectric actuators in heating/cooling systems or electric underfloor heating. RTR function is also available without prior programming (preconfigured).
The integrated RTR can optionally be equipped with a remote sensor in conjunction with temperature sensor 6226/T. 3-wire connection technology (neutral conductor required).
Programming/settings via the ABB-free@home® app next
Device access via app is via Bluetooth or wireless
Communication with the free@home system is wireless.
Matching central disc: 1794 MDRT-xxx
Additional Remote Temperature Sensor: 6226/T
Control valves in the “normally closed” : TSA/K230.2.
Rated Voltage: 230 V AC
Rated Frequency: 50Hz
Output Voltage: 230 V AC
Rated Current: 16A (Relay)
Ambient Air Temperature: Operation -5 ... +45 °C
Protection class: IP20
Mounting depth: 29 mm
Dimensions: (L x W x D): 71 mm x 71 mm x 40 mm

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
	62841 U-WL-500	2CKA006800A3115			1

ABB-free@home®

Room Themosta



Room temperature controller / Sensor unit wireless **NEW**

Sensor Unit with integrated RTR usable within the free@home® eco system Heating/cooling mode. RTC control element with room temperature controller function.
6-button touch control for local operating. Additional functions such as temperature adjustment and timer can be set via app. With temperature display of set-point temperature RTR function is also available without prior programming (preconfigured).
The integrated RTR can optionally be equipped with a remote sensor in conjunction with temperature sensor 6226/T. 3-wire connection technology (neutral conductor required).
Programming/settings via the Busch-free@home® app next.
Device access via app is via Bluetooth or wireless Communication with the free@home system is wireless.
Matching central plate: 1794 MDRT-xxx
Additional Remote Temperature Sensor: 6226/T
Control valves in the “normally closed” : no
Rated Voltage: 230 V AC
Rated Frequency: 50Hz
Output Voltage: no
Rated Current: no
Ambient Air Temperature: Operation -5 ... +45 °C
Protection class: IP20
Mounting depth: 29 mm
Dimensions: (L x W x D): 71 mm x 71 mm x 40 mm

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
	62842 U-WL-500	2CKA006800A3117			1

ABB-free@home®

Room Themosta

Room temperature controller with electronic switch actuator wireless NEW

Room temperature controller with integrated actuator output.
Wireless connection and operating via free@home Next App. Use as a stand-alone controller or within the eco system with Busch-free@home® Heating/cooling operation.
Electronic-actuator output Control element with room temperature controller function.
6-button touch-operation for a local operation. Additional functions such as temperature adjustment and timer can be set via app. With temperature display target value.
With integrated switching actuator, e.g. for controlling thermoelectric actuators in heating/cooling systems or electric underfloor heating. RTR function is also available without prior programming (preconfigured). 3-wire connection technology (neutral conductor required).
Programming/settings via the ABB-free@home® Next App.
Device access via app is via Bluetooth or wireless Communication with the free@home system is wireless.
Matching central plate: 1794 MDRT-xxx
Additional Remote Temperature Sensor: no
Control valves in the “normally closed” : TSA/K230.2.
Rated Voltage: 230 V AC
Rated Frequency: 50Hz
Output Voltage: 230 V AC
Rated Current: 1A (MOSFET)
Ambient Air Temperature: Operation -5 ... +45 °C
Protection class: IP20
Mounting depth: 29 mm
Dimensions: (L x W x D): 71 mm x 71 mm x 40 mm

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
	62843 U-WL-500	2CKA006800A3119			1

ABB-free@home®
Room Themosta

Cover plates suitable for the new wireless RTC NEW
Central plate with print for room temperature controller with display/Bluetooth or free@home wireless.

carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
studio white	1794 MDRT-84-500	2CKA006430A0421			1

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
studio white matt	1794 MDRT-44M	2CKA006430A0425			1
studio white	1794 MDRT-44G	2CKA006430A0426			1
black matt	1794 MDRT-45M	2CKA006430A0427			1

future® linear

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
black	64721-500	2CKA006430A0417			1
ivory white	1794 MDRT-82	2CKA006430A0418			1
aluminium silver	1794 MDRT-83	2CKA006430A0419			1
studio white	1794 MDRT-84-500	2CKA006430A0421			1
studio white matt	1794 MDRT-884	2CKA006430A0423			1
black matt	1794 MDRT-885	2CKA006430A0424			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
white	1794 MDRT-92-507	2CKA006430A0414			1
alpine white	1794 MDRT-94-507	2CKA006430A0415			1
château-black	1794 MDRT-95-507	2CKA006430A0416			1

ABB-free@home®

Sensor / Switch Actuator

Switch actuator sensor, 1/1gang [1) 2)]
For switching 127 V~/230 V~ consumers.
With integrated switch actuator.
Switching function is available also without prior programming (pre-configured).
Configuration can be changed later via the web interface (groups, scenes, etc.).
Only to be used in combination with ABB-free@home® 1gang rockers.
The bus can be connected via enclosed terminal block.
When installing in the flush-mounted box, a spatial division between the bus cable and 127 V/230 V installation cable is to be adhered to! If this minimum distance is not possible, use electronic boxes or insulating tubes.
Control element: Switch contacts top/bottom
Display elements: LED as light for orientation or display of the switching state
Bus voltage: 24 V
Outputs: 1x Normally open contact, potential free
Suitable for: ohmic
Rated current: 10 A
Output voltage: 230 V~
Rated power: 2300 W
Suitable for: capacitive
Rated current: 10 AX
Rated power: 2300 VA
Suitable for: inductive
Rated current: 10 AX
Rated power: 2300 VA
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 45 mm
Mounting depth: 32 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	180112	SSA-F-1.1.1	2CKA006220A0123			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.

ABB-free@home®

Sensor / Switch Actuator

Switch actuator sensor, 2/1gang [1) 2)]
For switching 127 V~/230 V~ consumers.
With integrated switch actuator.
Switching function is available also without prior programming (left sensor channel is pre-configured).
Configuration can be changed later via the web interface (groups, scenes, etc.).
The right sensor channel for programming additional functions (groups, scenes, etc.).
Only to be used in combination with ABB-free@home® 2gang rockers.
The bus can be connected via enclosed terminal block.
When installing in the flush-mounted box, a spatial division between the bus cable and 127 V/230 V installation cable is to be adhered to! If this minimum distance is not possible, use electronic boxes or insulating tubes.
Control element: Switch contacts top/bottom
Display elements: LED as light for orientation or display of the switching state
Bus voltage: 24 V
Outputs: 1x Normally open contact, potential free
Suitable for: ohmic
Rated current: 10 A
Output voltage: 230 V~
Rated power: 2300 W
Suitable for: capacitive
Rated current: 10 AX
Rated power: 2300 VA
Suitable for: inductive
Rated current: 10 AX
Rated power: 2300 VA
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 45 mm
Mounting depth: 32 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	180129	SSA-F-2.1.1	2CKA006220A0124			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.

ABB-free@home®

Sensor / Switch Actuator

Switch actuator sensor, 2/2gang [1) 2)]

For switching 127 V~/230 V~ consumers.
With integrated 2gang switch actuator.
Switching function is available also without prior programming (both sensor channels are pre-configured). Configuration can be changed later via the web interface (groups, scenes, etc.). Only to be used in combination with ABB-free@home® 2gang rockers.
The bus can be connected via enclosed terminal block.
When installing in the flush-mounted box, a spatial division between the bus cable and 127 V/230 V installation cable is to be adhered to! If this minimum distance is not possible, use electronic boxes or insulating tubes.
Control element: Switch contacts top/bottom
Display elements: LED as light for orientation or display of the switching state
Bus voltage: 24 V
Outputs: 2x Normally open contact, potential free
Suitable for: ohmic
Rated current: 5 A
Output voltage: 230 V~
Rated power: 1380 W
Suitable for: capacitive
Rated current: 4 AX
Rated power: 920 VA
Suitable for: inductive
Rated current: 4 AX
Rated power: 920 VA
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 45 mm
Mounting depth: 32 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	180136	SSA-F-2.2.1	2CKA006220A0125			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.

ABB-free@home®

Sensor / Dimming Actuator

Dimming actuator sensor, 1/1gang [1) 2) 3)]
For dimming 230 V~ loads.
With integrated universal dimming actuator for controlling LEDs, incandescent lamps, 230 V halogen lamps, low-voltage halogen lamps with conventional or electronic transformers, and dimmable energy-saving halogen lamps.
For dimmable Retrofit-LEDs (LEDi).
Dimming function is available also without prior programming (pre-configured).
Configuration can be changed later via the web interface (groups, scenes, etc.).
Only to be used in combination with ABB-free@home® 1gang rockers.
The bus can be connected via enclosed terminal block.
When installing in the flush-mounted box, a spatial division between the bus cable and 230 V installation cable is to be adhered to! If this minimum distance is not possible, use electronic boxes or insulating tubes.
Control element: Switch contacts top/bottom
Display elements: LED as light for orientation or display of the switching state
Bus voltage: 24 V
Outputs: 1x dimming channel
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformer.
Rated power: 10 - 180 W/VA
Suitable for: LEDi and energy-saving bulbs; typical
Rated power: 2 - 80 W/VA
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 45 mm
Mounting depth: 32 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	180143	SDA-F-1.1.1	2CKA006220A0126			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.
3) The power is supplied by the ABB-Welcome system controller 83300.

ABB-free@home®

Sensor / Dimming Actuator

Dimming actuator sensor, 2/1gang [1) 2) 3)]
For dimming 230 V~ loads.
With integrated universal dimming actuator for controlling LEDs, incandescent lamps, 230 V halogen lamps, low-voltage halogen lamps with conventional or electronic transformers, and dimmable energy-saving halogen lamps.
For dimmable Retrofit-LEDs (LEDi).
Dimming function is available also without prior programming (left sensor channel is pre-configured). Configuration can be changed later via the web interface (groups, scenes, etc.).
The right sensor channel for programming additional functions (groups, scenes, etc.).
Only to be used in combination with ABB-free@home® 2gang rockers.
The bus can be connected via enclosed terminal block.
When installing in the flush-mounted box, a spatial division between the bus cable and 230 V installation cable is to be adhered to! If this minimum distance is not possible, use electronic boxes or insulating tubes.
Control element: Switch contacts top/bottom
Display elements: LED as light for orientation or display of the switching state
Bus voltage: 24 V
Outputs: 1x dimming channel
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers or electronic transformer.
Rated power: 10 - 180 W/VA
Suitable for: LEDi and energy-saving bulbs; typical
Rated power: 2 - 80 W/VA
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 45 mm
Mounting depth: 32 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	180150	SDA-F-2.1.1	2CKA006220A0127			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.
3) The power is supplied by the ABB-Welcome system controller 83300.

ABB-free@home®

Sensor / Blinds Actuator



Blind actuator sensor, 1/1gang [1) 2)]
For controlling blind or awning motors.
With integrated blind actuator.
Blind function is available also without prior programming (pre-configured).
Configuration can be changed later via the web interface (groups, scenes, etc.).
Only to be used in combination with ABB-free@home® 1gang rockers.
The bus can be connected via enclosed terminal block.
When installing in the flush-mounted box, a spatial division between the bus cable and 127 V/230 V installation cable is to be adhered to! If this minimum distance is not possible, use electronic boxes or insulating tubes.
Control element: Switch contacts top/bottom
Display elements: LED as light for orientation or display of the switching state
Bus voltage: 24 V
Outputs: 1x Change-over contacts/normally open contact, potential-bound
Suitable for: Operation mode Blind
Rated current: 4 A
Output voltage: 230 V~
Rated power: 920 VA
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 45 mm
Mounting depth: 32 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	180167	SBA-F-1.1.1	2CKA006220A0128			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.

ABB-free@home®

Sensor / Blinds Actuator

Blind actuator sensor, 2/1gang [1) 2)]
For controlling blind or awning motors.
With integrated blind actuator.
Blind function is available also without prior programming (left sensor channel is pre-configured). Configuration can be changed later via the web interface (groups, scenes, etc.).
The right sensor channel for programming additional functions (groups, scenes, etc.).
Only to be used in combination with ABB-free@home® 2gang rockers.
The bus can be connected via enclosed terminal block.
When installing in the flush-mounted box, a spatial division between the bus cable and 127 V/230 V installation cable is to be adhered to! If this minimum distance is not possible, use electronic boxes or insulating tubes.
Control element: Switch contacts top/bottom
Display elements: LED as light for orientation or display of the switching state
Bus voltage: 24 V
Outputs: 1x Change-over contacts/normally open contact, potential-bound
Suitable for: Operation mode Blind
Rated current: 4 A
Output voltage: 230 V~
Rated power: 920 VA
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 45 mm
Mounting depth: 32 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	180174	SBA-F-2.1.1	2CKA006220A0129			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.

ABB-free@home®

Movement Detector

Movement detector/switch actuator, 1gang [1) 2)]
With select lens for detection with animal access.
For automatic switching of ABB-free@home® actuators dependent on movement and brightness. Switch-off delay of the actuator can be programmed via the web interface of the System Access Point. For switching 127 V~/230 V~ consumers. With integrated switch actuator. Switching function is available also without prior programming (pre-configured). Configuration can be changed later via the web interface (groups, scenes, etc.).
The bus can be connected via enclosed terminal block. When installing in the flush-mounted box, a spatial division between the bus cable and 127 V/230 V installation cable is to be adhered to! If this minimum distance is not possible, use electronic boxes or insulating tubes.
Bus voltage: 24 V
Outputs: 1x Normally open contact, potential free
Suitable for: ohmic
Rated current: 10 A
Output voltage: 230 V~
Rated power: 2300 W
Suitable for: capacitive
Rated current: 10 AX
Rated power: 2300 VA
Suitable for: inductive
Rated current: 10 AX
Rated power: 2300 VA
Detection range: frontal: 6 m, lateral: 3 m
Detection angle: 180 °
Brightness limit value: 1 Lux - 500 Lux
Mounting height: 1.1 m - 1.3 m
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 53 mm
Mounting depth: 32 mm
Position for installation: vertical

Busch-Duro 2000® SI, Reflex SI

Color	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
212 white	179765	MSA-F-1.1.1-212	2CKA006220A0220			1

Reflex SI

Color	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
214 alpine white	179802	MSA-F-1.1.1-214	2CKA006220A0221			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.

ABB-free@home®

Sensor / Blinds Actuator

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
81 anthracite	179840	MSA-F-1.1.1-81	2CKA006220A0215			1
82 ivory white	203682	MSA-F-1.1.1-82	2CKA006220A0531			1
84 studio white	179895	MSA-F-1.1.1-84	2CKA006220A0217			1
840 antique brass	195758	MSA-F-1.1.1-840	2CKA006220A0386			1
866 stainless steel	203859	MSA-F-1.1.1-866	2CKA006220A0548			1
884 studiowhite matt	204498	MSA-F-1.1.1-884	2CKA006220A0616			1
885 black matt	204665	MSA-F-1.1.1-885	2CKA006220A0633			1

basic55®

Color	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
92 white	204849	MSA-F-1.1.1-92	2CKA006220A0650			1
93 champagne	204993	MSA-F-1.1.1-93	2CKA006220A0667			1
94 alpine white	205143	MSA-F-1.1.1-94	2CKA006220A0684			1
95 chateau-black	205297	MSA-F-1.1.1-95	2CKA006220A0701			1
96 chalet white	205501	MSA-F-1.1.1-96	2CKA006220A0718			1

Levit®

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
White	6220H-A04000 03	2CHH624000A4003			1
Grey	6220H-A04000 16	2CHH624000A4016			1
Macchiato	6220H-A04000 18	2CHH624000A4018			1
Anthracite	6220H-A04000 63	2CHH624000A4063			1
Steel	6220H-A04000 69	2CHH624000A4069			1
Silver	6220H-A04000 70	2CHH624000A4070			1

Sky

Color	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
AI Stainless Steel	145396	CP-MD-85AI	2CLA854150A1401			1
BL Soft White	145372	CP-MD-85BL	2CLA854150A1101			1
NS Soft Black	145402	CP-MD-85NS	2CLA854150A1501			1
PL Silver	145389	CP-MD-85PL	2CLA854150A1301			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.

ABB-free@home®

Sensor / Blinds Actuator

With select lens for detection with animal access. Communication with the free@home system is carried out wireless. For automatic switching of ABB-free@home® actuators dependent on movement and brightness. Switch-off delay of the actuator can be programmed via the web interface of the System Access Point. For switching 127 V~/230 V~ consumers. With integrated switch actuator. Switching function is available also without prior programming (pre-configured). Configuration can be changed later via the web interface (groups, scenes, etc.). The bus can be connected via enclosed terminal block. When installing in the flush-mounted box, a spatial division between the bus cable and 127 V/230 V installation cable is to be adhered to! If this minimum distance is not possible, use electronic boxes or insulating tubes.
Bus voltage: 24 V
Outputs: 1x Normally open contact, potential free
Suitable for: ohmic
Rated current: 10 A
Output voltage: 230 V~
Rated power: 2300 W
Suitable for: capacitive
Rated current: 10 AX
Rated power: 2300 VA
Suitable for: inductive
Rated current: 10 AX
Rated power: 2300 VA
Detection range: frontal: 6 m, lateral: 3 m
Detection angle: 180 °
Brightness limit value: 1 Lux - 500 Lux
Mounting height: 1.1 m - 1.3 m
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 53 mm
Mounting depth: 32 mm
Position for installation: vertical

Levit®

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
White	6220H-A04100 03	2CHH624100A4003			1
Grey	6220H-A04100 16	2CHH624100A4016			1
Macchiato	6220H-A04100 18	2CHH624100A4018			1
Anthracite	6220H-A04100 63	2CHH624100A4063			1
Steel	6220H-A04100 69	2CHH624100A4069			1
Silver	6220H-A04100 70	2CHH624100A4070			1

ABB-free@home®

Sensor / Blinds Actuator

Twisted Pair Ceiling mount Presence detectors

Color	Bbn 6925897	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
			2TYZ510505G0621			1
			2TYZ510505G0721			1
			2TYZ510202G0621			1
			2TYZ510202G0721			1
white matt	543864	PMA/K2.1-884	2TYZ510000G0603			1
white matt	543871	PMA/K1.1-884	2TYZ510000G0601			1
white matt	543888	PMA/A1.1-884	2TYZ510000G0602			1
black matt	543956	PMA/K2.1-885	2TYZ510000G0703			1
black matt	543963	PMA/K1.1-885	2TYZ510000G0701			1
black matt	543970	PMA/A1.1-885	2TYZ510000G0702			1
white matt	544045	PMA/K2.11-884	2TYZ510000G0613			1
white matt	544052	PMA/A1.11-884	2TYZ510000G0612			1
black matt	544120	PMA/K2.11-885	2TYZ510000G0713			1
black matt	544137	PMA/A1.11-885	2TYZ510000G0712			1

ABB-free@home®

Control elements wireless

Control element flex,1gang,WL

For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all ABB-flexTronics® inserts. Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® Next app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U-500. For series relay insert flex, 2gang, 64821 U-500. For e-contact insert flex, 1gang, 64814 U-500. For LED touch dimmer insert flex, 1gang, 64851 U-500. For extension insert flex, 64891 U-500. For blind insert flex, 1gang, 64831 U-500.

	Bbn 4011395 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
WIRELESS						
	296370	62711-WL-500	2CKA006200A0281			1

Control element flex, 2gang,WL

For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all ABB-flexTronics® inserts. Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® Next app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U-500. For series relay insert flex, 2gang, 64821 U-500. For e-contact insert flex, 1gang, 64814 U-500. For LED touch dimmer insert flex, 1gang, 64851 U-500. For extension insert flex, 64891 U-500. For blind insert flex, 1gang, 64831 U-500.

	Bbn 4011395 EAN	Order details Type code	Order code	Price 1 piece	Weight 1 piece kg	Pack unit pc.
WIRELESS						
	292952	62721-WL-500	2CKA006200A0283			1

ABB-free@home®

Inserts

Relay insert flex, 1gang [1)]
3 wire connection (neutral conductor required).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1. Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps.
Rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 2300 VA.
Temperature range (Device): -25 °C to 55 °C.
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm.
Mounting depth: 25 mm



[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Relay insert flex, 1gang	294055	64811 U-500	2CKA006800A3042			1

ABB-free@home®

Inserts

Relay insert flex, 2gang 1)
3 wire connection (neutral conductor required).
For switching lighting systems.
For switching two independent load circuits.
For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-... .
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 2
Outputs: 2x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 300 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Relay insert flex, 2gang	294079	64821 U-500	2CKA006800A3045			1

ABB-free@home®

Inserts

Blind insert, 1 gang, 2 way flex
3 wire connection (neutral conductor required).
For the control of roller shutters, blind and awning motors with mechanical or electronic limit switch shut-off.
Group formation via extension input possible.
Operation also via conventional push buttons (2020 US non-illuminated/2021/6 UK) possible.
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Blind insert flex, 1gang	292990	64831 U-500	2CKA006400A0096			1

ABB-free@home®

Inserts

LED dimmer insert flex, 1gang 1) 2) 3) 4) 5) 6) FM, LED, 3-240 VA
2-wire connection (neutral conductor not required).
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi).
Rated voltage: 230 V~, +10 % / -10 %.
Rated frequency: 50 Hz. Inputs: 1.
Outputs: 1x dimming channel.
Suitable for: 230 V LEDi, typical (leading edge control).
Rated power: 3 - 100 VA.
Suitable for: 230 V LEDi, typical (trailing edge control).
Rated power: 3 - 240 W.
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm.
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Buscah-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
LED dimmer insert flex, 1gang	294208	64851 U-500	2CKA006500A0013			1

ABB-free@home®

Inserts

e-contact insert flex, 1gang 1) 2)
2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

[1] Use only dimmable high-voltage LEDs.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
e-contact insert flex 1gang	294093	64814 U-500	2CKA006800A3048			1

ABB-free@home®

Inserts

Extension insert flex 1)
3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations.
For group control of flex inserts via extension unit communication.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with all flex inserts.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Control/Signal outputs: 1, electronic output, potential-bound
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
Extension insert flex	294116	64891 U-500	2CKA006800A3051			

ABB-free@home®

Movement detectors wireless

Busch-Watchdog 180 flex, comfort sensor, wireless with select-lens
For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all flexTronic inserts. Works with free@home.
Remote operation via the Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® app or via the web interface of the System Access Point.
Extension of the detection range by means of master/slave combination. Additional activation option via push-button input on the flush-mounted insert. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode.
Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U-500. For e-contact insert flex, 1gang, 64814 U-500. For relay insert flex, 2gang, 64821 U-500. For LED touch dimmer insert flex, 1gang, 64851 U-500. For extension insert flex, 64891 U-500. Mounting height: 22 mm. Temperature range (device): -5 °C - 45 °C Storage temperature range: -25 °C - 70 °C. Detection range: frontal: 12 m, lateral: 12 m, at mounting height: 1.1 m. Brightness limit value: 5 Lux - Up to daytime operation. Detection angle: 180°. Dimensions: (L x W x D): 55 mm x 55 mm x 35 m. Mounting height: 0.8 m - 1.2 m
Please order the respective flush-mounted insert separately. The range specifications refer only to an ambient temperature of 21°C. RAL colour number: Similar 9010

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
anthracite	292211	62762-81-WL-500	2CKA006200A0166			1
ivory white	292228	62762-82-WL-500	2CKA006200A0168			1
aluminium silver [1]	292235	62762-83-WL-500	2CKA006200A0170			1
studio white	292242	62762-84-WL-500	2CKA006200A0172			1
studio white, matt [1]	292266	62762-884-WL-500	2CKA006200A0176			1
black matt [1]	292273	62762-885-WL-500	2CKA006200A0178			1
antique brass [2]	292280	62762-840-WL-500	2CKA006200A0179			1
stainless steel	292297	62762-866-WL-500	2CKA006200A0181			1

1) Surface painted.
2) Real metal surface refined by hand. Rocker

basic55®

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
white	292341	62762-92-WL-507	2CKA006200A0186			1
champagne [1]	292358	62762-93-WL-507	2CKA006200A0187			1
alpine white	292365	62762-94-WL-507	2CKA006200A0188			1
château-black	292372	62762-95-WL-507	2CKA006200A0189			1
chalet-white	292389	62762-96-WL-507	2CKA006200A0190			1

1) Surface painted.

ABB-free@home®

Movement detectors wireless

Busch-Watchdog 180 flex, comfort sensor, wireless with multi-lens
For automatic switching of devices dependent on motion and brightness. Push switch function possible at all times. For detection down to the floor. For detection in stairwells. With 4 detection levels. In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function. With time-controlled night anti-glare function. With enabling of pre-warning of switch-off for stairwell operation. Compatible with all flexTronic inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m. Extension of the detection range by means of master/slave combination. Additional activation option via push-button input on the flush-mounted insert. Timer with Astro function. Automatic switchover from summer time to winter time (switch-off function). With continuous light/continuous Off function. With brightness-independent test mode for evaluating the detection zone. With detection display in test mode. Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable. For relay insert flex, 1gang, 64811 U-500. For e-contact insert flex, 1gang, 64814 U-500. For relay insert flex, 2gang, 64821 U-500. For LED touch dimmer insert flex, 1gang, 64851 U-500. For extension insert flex, 64891 U-500. Mounting height: 31 mm. Temperature range (device): -5 °C - 45 °C. Storage temperature range: -25 °C - 70 °C Detection range: frontal: 8 m, lateral: 7 m, at mounting height: 1.1 m. Detection range 2: frontal: 8 m, lateral: 8 m, at mounting height: 2.2 m. Brightness limit value: 5 Lux - Up to daytime operation. Detection angle: 180 °. Dimensions: (L x W x D): 55 mm x 55 mm x 45 mm. Mounting height: 0.8 m - 1.2 m, alternatively: 2.2 m Please order the respective flush-mounted insert separately. The range specifications refer only to an ambient temperature of 21°C.
RAL colour number: Similar 9010

future® linear

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
anthracite	292648	62764-81-WL-500	2CKA006200A0234			1
ivory white	292655	62764-82-WL-500	2CKA006200A0236			1
aluminium silver [1]	292662	62764-83-WL-500	2CKA006200A0238			1
studio white	292679	62764-84-WL-500	2CKA006200A0240			1
studio white, matt [1]	292693	62764-884-WL-500	2CKA006200A0244			1
black matt [1]	292709	62764-885-WL-500	2CKA006200A0246			1
antique brass [2]	292716	62764-840-WL-500	2CKA006200A0247			1
stainless steel	292723	62764-866-WL-500	2CKA006200A0249			1

1) Surface painted.
2) Real metal surface refined by hand. Rocker

basic55®

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
white	292778	62764-92-WL-507	2CKA006200A0254			1
champagne [1]	292785	62764-93-WL-507	2CKA006200A0255			1
alpine white	292792	62764-94-WL-507	2CKA006200A0256			1
château-black	292808	62764-95-WL-507	2CKA006200A0257			1
chalet-white	292815	62764-96-WL-507	2CKA006200A0258			1

1) Surface painted.

ABB-free@home®

Movement detectors wireless

Busch-Watchdog PRO 280° Wireless
Wireless movement detector for detecting thermal motion.
With integrated switch actuator.
With high-quality lens for optimum detection.
Level balancing of the device +/- 30°.
Additional possibility for switch-on via normally open push-button switch.
Potentiometer for the adjustment of standard parameters: Switch-on brightness, Switch-off delay, Testmode and short-term impulse.
Measurement of outdoor temperature and ambient brightness level at the device.
Optional: ABB-free@home® Next app for commissioning of basic and add-on parameters or via the web interface of the System Access Point.
Remote operation via the Bluetooth and smartphone/tablet app.
With integrated dismounting protection.
Individual adjustment of detection range via enclosed protective foil which can be cut to size.
With brightness-independent test mode for evaluating the detection zone.
Switch-off delay: 10 sec to 30 min or short-time pulse 1 sec adjustable.
Adjustment of standard parameters via app: Switch-on brightness, Switch-off delay, Testmode and short-term impulse.
Adjustment of add-on parameters via app: Detection sensitivity, PIR switch-off, takeover of the measured brightness level, permanent on, permanent off.
Switch-off delay also programmable via app.
With optical indicator for detection and operation mode.
With automatic range stabilization.
With automatic interference suppression.
With automatic dazzle-proofing.
Surveillance density: 106 sectors with 424 switching segments.
Brightness limiting values: lux range 0.5–1000.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
brown	319147	**6251/28-131-WL-500**	2CKA006200A0858		0.425	1
aluminium silver	319161	**6251/28-133-WL-500**	2CKA006200A0860		0.425	1
studio white	319185	**6251/28-134-WL-500**	2CKA006200A0862		0.425	1
anthracite	319208	**6251/28-135-WL-500**	2CKA006200A0864		0.425	1
stainless steel	319222	**6251/28-136-WL-500**	2CKA006200A0866		0.425	1

ABB-free@home®

Movement detectors wireless

Busch-Watchdog PRO 280° free@home
4 Channel free@home wired movement detector for indoor and outdoor area.
For automatic switching of free@home actuators dependent on movement and brightness.
With a twilight / brightness sensor. With a temperature sensor.
With high-quality lens for optimum detection. Level balancing of the device +/- 30°.
Horizonatal orientation of the optical system +90°/- 60°.
Vertical orientation of the optical system +30°/- 30°. With ground and rear-field detection.
The bus can be connected via enclosed terminal blocks.
ABB-free@home® Next app for commissioning of basic and add-on parameters.
Programming only under connected bus voltage.
With integrated dismounting protection.
Individual adjustment of detection range via enclosed protective foil which can be cut to size.
With brightness-independent test mode for evaluating the detection zone.
Adjustment of parameters via App: Switch-on brightness, Switch-off delay, permanent on, permanent off, detection area.
Measurement of outdoor temperature and ambient brightness level at the device.
With automatic range stabilization.
With automatic interference suppression.
With automatic dazzle-proofing.
With 4 movement channels.
Surveillance density: 106sectors with 424 switching segments.
Detection area: frontal: 16 m, lateral: 16 m
Installation height: 2,5 m
Twilight limiting values: 1 - 1.000Lux
Brightness limiting values: 1.000 - 80.000
Sensor angle: 280°
Number of PIR: 4
Bus voltage: 24 V
No additional power supply necessary.
Power consumption: 0,3 W
Current: 12mA
Protection class device: IP 55
Temperature range device: -25°C - 55°C
Storage temperature device: -25°C - 70°C
Dimensions (H x W x D): 124mm x 110mm x 158mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
brown	319239	**BW-A4.1-131**	2CKA006220A0910		0.425	1
aluminium silver	319246	**BW-A4.1-133**	2CKA006220A0911		0.425	1
studio white	319253	**BW-A4.1-134**	2CKA006220A0912		0.425	1
anthracite	319260	**BW-A4.1-135**	2CKA006220A0913		0.425	1
stainless steel	319277	**BW-A4.1-136**	2CKA006220A0914		0.425	1

ABB-free@home®

Sets

Busch-Watchdog PRO Corner adapter

For detection on two sides of the house, in combination with Busch-Watchdog® PRO 280.
It is mounted at the corner of the house, on the wall. For flush or surface cable entries.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
brown	319444	**6851/EA-131-500**	2CKA006800A3084		0.144	1
aluminium silver	319468	**6851/EA-133-500**	2CKA006800A3086		0.144	1
studio white	319482	**6851/EA-134-500**	2CKA006800A3088		0.144	1
anthracite	319505	**6851/EA-135-500**	2CKA006800A3090		0.144	1
stainless steel	319529	**6851/EA-136-500**	2CKA006800A3092		0.144	1



Busch-Watchdog PRO Design Frame

Design frame for square and cubic design. For combination with all devices of Busch-Watchdog® PRO series. After wall mounted installation of the detector, the design frame could be putted over the Watchdog.
The design frame is fixed via Snap-On mechanism. Optional accessories. Retrofit installation possible.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
brown	319543	**6851/DR-131-500**	2CKA006800A3094		0.18	1
aluminium silver	319567	**6851/DR-133-500**	2CKA006800A3096		0.155	1
studio white	319581	**6851/DR-134-500**	2CKA006800A3098		0.183	1
anthracite	319604	**6851/DR-135-500**	2CKA006800A3100		0.155	1
stainless steel	319628	**6851/DR-136-500**	2CKA006800A3102		0.155	1

Weather station

For recording and transmitting of brightness, temperature, wind speed and rain.
Weather data can be linked with actuators to automatically control functions.
Weather data can be visualized in the ABB-free@home® web interface and the ABB-free@home® app. Wind speed measuring range 2 - 30 m/s
The bus can be connected via enclosed terminal block.
Rated voltage: 110 V~ - 230 V~. Rated frequency: 50 Hz - 60 Hz. Bus voltage: 24 V-.
Inputs: 4. Protection class (Device): IP 44. Temperature range (Device): -20 °C to 55 °C
Temperature range (Sensor):
Brightness limit value: 1 Lux - 100000 Lux. Dimensions: (L x W x D): 108 mm x 121 mm x 227 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	205525	WS-1	2CKA006220A0212			1

ABB-free@home®

Sets wireless

Blind flex, Set, WL

Blind insert with tapping control element, 2gang, wireless. For the manual and automatic control of roller blinds, blinds, awnings. Timer with Astro function. For saving and calling up scenes and groups via the right rocker. Remote operation via the Bluetooth and smartphone/tablet app.
Consisting of flex blind insert, 64831 U-500.
Consisting of control element flex, 2gang, wireless, 62721-WL-500
Consisting of rocker, 2gang left with >Blind< icon 6232-20-84-500
Consisting of rockers, 2gang right with >Scene< icon 6233-22-84-500
Cover frame design future® linear 1721-184K.
Control element: Switch contacts top/bottom
Display elements: LED (switch-off function / brightness adjustable) for status display.
Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz
Temperature range (device): -5 °C - 45 °C. Storage temperature range: -20 °C - 70 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mm
Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
future® linear	292969	62731/UJ-84-WL-500	2CKA006200A0285	yes		1

LED dimmer flex, Set, WL

For manual and automatic switching and dimming of lamps. For saving and calling up scenes and groups via the right rocker. Remote operation via the Bluetooth and smartphone/tablet app. Optimised for dimming of retrofit LED lamps (LEDi). Consisting of Flex touch dimmer insert, 64851 U-500. Consisting of control element flex, 2gang, wireless, 62721-WL-500. Consisting of rocker, 2gang left with >Dimmer< icon 6234-21-84-500. Consisting of rockers, 2gang right with >Scene< icon 6233-22-84-500. Consisting of future® linear cover frames, 1gang 1721-184K.
Control element:
Switch contacts top/bottom Display elements: LED (switch-off function / brightness adjustable) for status display. Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Outputs: 1 dimming channel. Suitable for: 230 V LEDi, typical (leading edge control). Rated output: 3 - 100 VA.
Suitable for: 230 V LEDi, typical (trailing edge control). Rated output: 3 - 240 W. Temperature range (device): -5 °C - 45 °C. Storage temperature range: -20 °C - 70 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 45 mm. Mounting depth: 25 mm
In the case of conventional transformers, take ~20% transformer loss into account.
In case of electronic transformers, 5 % transformer losses. Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete). RAL colour number: Similar 9016
Recommendation: Please use loads and types of one producer.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
future® linear	294185	62851 UJ-84-WL-500	2CKA006200A0295	yes		1

ABB-free@home®

Sets wireless

Busch-Watchdog 180 flex, wireless. Complete set with Comfort sensor select lens and relay insert

Consisting of Busch-Watchdog 180 flex comfort sensor with select lens, 62762-84-WL-500. Consisting of relay insert flex, 1gang, 64811 U-500. Consisting of future® linear cover frames, 1gang 1721-184K. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz
Power dissipation: 0.3 W. Outputs: 1 Normally open contact, potential-bound
suitable for: 230 V- LEDi, typical. Rated output: 300 VA. Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated output: 2300 W. Suitable for: Fluorescent lamps
Rated output: 2300 VA. Rated current: 10 AX, cos ϕ0.9. Temperature range (device): -5 °C - 45 °C
Storage temperature range: -25 °C - 70 °C. Detection range: frontal: 12 m, lateral: 12 m, at mounting height: 1.1 m. Brightness limit value: 5 Lux - Up to daytime operation
Detection angle: 180 °. Dimensions: (L x W x D): 81 mm x 81 mm x 48 mm
Mounting depth: 25 mm. Mounting height: 0.8 m - 1.2 m. The range specifications refer only to an ambient temperature of 21°C. Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete). RAL colour number: Similar 9016

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	292419	62762 UJ-84-WL-500	2CKA006200A0196			1

Busch-Watchdog 180 flex, wireless. Complete set with Comfort sensor multi-lens and relay insert

Consisting of Busch-Watchdog 180 flex comfort sensor with multi-lens, 62764-84-WL-500. Consisting of relay insert flex, 1gang, 64811 U-500. Consisting of future® linear cover frames, 1gang 1721-184K. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz
Power dissipation: 0.3 W. Outputs: 1 Normally open contact, potential-bound. Suitable for: 230 V- LEDi, typical. Rated output: 300 VA. Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated output: 2300 W. Suitable for: Fluorescent lamps. Rated output: 2300 VA
Rated current: 10 AX, cos ϕ0.9. Temperature range (device): -5 °C - 45 °C. Storage temperature range: -25 °C - 70 °C. Detection range: frontal: 8 m, lateral: 7 m, at mounting height: 1.1 m. Detection range 2: frontal: 8 m, lateral: 8 m, at mounting height: 2.2 m. Brightness limit value: 5 Lux - Up to daytime operation. Detection angle: 180 °. Dimensions: (L x W x D): 81 mm x 81 mm x 57 mm. Mounting depth: 25 mm. Mounting height: 0.8 m - 1.2 m, alternatively: 2.2 m. The range specifications refer only to an ambient temperature of 21°C.. Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete). RAL colour number: Similar 9016

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
future® linear	292846	62764 UJ-84-WL-500	2CKA006200A0264			1

ABB-free@home®
Zenit

Cover plate for 2 fold push buttons incl neutral symbols
Cover for ABB-free@home® 1/2 gang switches:
SSA-F-1.1.PB.1, SDA-F-1.1.PB.1, SBA-F-1.1.PB.1 and SU-F-1.0.PB.1
Dimensions (H × W): 44 mm x 44 mm

Color	Bbn 8427238	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
white	113401	SR-2-N2BL	2CLA222620N1102			1
anthracite	113425	SR-2-N2AN	2CLA222620N1802			1
silver	113418	SR-2-N2PL	2CLA222620N1302			1
champagne	113906	SR-2-N2CV	2CLA222620N1902			1

Available with the following interchangeable icons (blind, light, dimmer, scene)

SBB-N2BL	2CLA202620N1102	
SBB-N2GR	2CLA202620N1402	
SBD-N2BL	2CLA202640N1102	
SBD-N2GR	2CLA202640N1402	
SBL-N2BL	2CLA202610N1102	
SBL-N2GR	2CLA202610N1402	
SBS-N2BL	2CLA202630N1102	
SBS-N2GR	2CLA202630N1402	



Cover plate for 4 fold push buttons incl neutral symbols
Cover for ABB-free@home® 2/4 gang switches:
SSA-F-2.1.PB.1, SSA-F-2.2.PB.1, SDA-F-2.1.PB.1, SBA-F-2.1.PB.1 and SU-F-2.0.PB.1
Dimensions (H × W): 44 mm x 44 mm

Color	Bbn 8427238	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
white	113432	SR-4-N2BL	2CLA222640N1102			1
anthracite	113456	SR-4-N2AN	2CLA222640N1802			1
silver	113449	SR-4-N2PL	2CLA222640N1302			1
champagne	113913	SR-4-N2CV	2CLA222640N1902			1

Available with the following interchangeable icons (blind, light, dimmer, scene)

SBB-N2BL	2CLA202620N1102	
SBB-N2GR	2CLA202620N1402	
SBD-N2BL	2CLA202640N1102	
SBD-N2GR	2CLA202640N1402	
SBL-N2BL	2CLA202610N1102	
SBL-N2GR	2CLA202610N1402	
SBS-N2BL	2CLA202630N1102	
SBS-N2GR	2CLA202630N1402	

Color legend:
AN = anthracite, BL = white, PL = silver, CV = champagne, GR = grey
WG = Wengue wood, PZ = Stone slate, CB = White glass, CN = Black glass, OX = Aluminium (Inox AISI304)

ABB-free@home®

Zenit



Metal mounting frame

Metal mounting frame for flush mounted units.

Metal mounting frame with clamps for flush mounted units of Zenit VDE range.

Dimensions (H × W): 102 mm x 74 mm, 74 mm x 102 mm

Color	Bbn	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
square		N2271.9	2CLA227190N1001			1
vertical		N2371.9 V	2CLA237190N1002			1

ABB-free@home®

Millenium

Cover plate for 2 fold push buttons incl neutral symbols

Cover for ABB-free@home® 1/2 gang switches: SSA-F-1.1.PB.1, SDA-F-1.1.PB.1, SBA-F-1.1.PB.1 and SU-F-1.0.PB.1

Available in the following colors: anthracite

Dimensions (H × W): 44 mm x 44 mm

Color	Bbn 8427238	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
anthracite	115849	SR-2-AMAN	2CLA622620N1801			1

Available with the following interchangeable icons (blind, light, dimmer, scene)

	SBB-AMAN	2CLA602620N1801		SBL-AMAN	2CLA602610N1801
	SBD-AMAN	2CLA602640N1801		SBS-AMAN	2CLA602630N1801

Cover plate for 4 fold push buttons incl neutral symbols

Cover for ABB-free@home® 2/4 gang switches: SSA-F-2.1.PB.1, SSA-F-2.2.PB.1, SDA-F-2.1.PB.1, SBA-F-2.1.PB.1 and SU-F-2.0.PB.1

Available in the following colors: anthracite

Dimensions (H × W): 44 mm x 44 mm

Color	Bbn 8427238	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
anthracite	115856	SR-4-AMAN	2CLA622640N1801			1

Available with the following interchangeable icons (blind, light, dimmer, scene)

	SBB-AMAN	2CLA602620N1801		SBL-AMAN	2CLA602610N1801
	SBD-AMAN	2CLA602640N1801		SBS-AMAN	2CLA602630N1801

Color legend:
AN = anthracite, BL = white, PL = silver, CV = champagne, GR = grey
WG = Wengue wood, PZ = Stone slate, CB = White glass, CN = Black glass, OX = Aluminium (Inox AISI304)

ABB-free@home®

Millenium

Cover plate for movement detector
Cover for ABB-free@home® movement detector: MSA-F-1.1.1 and MD-F-1.0.PB.1
Available in the following colors: anthracite
Dimensions (H × W): 44 mm x 44 mm

	Bbn 8427238	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	115863	CP-MD-AMAN	2CLA624160N1801			1

Cover plate for room temperature controller
Cover for ABB-free@home® room temperature controller: RTC-F-1.PB
Available in the following colors: anthracite
Dimensions (H × W): 44 mm x 44 mm

	Bbn 8427238	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	115887	CP-RTC-AMAN	2CLA624060N1801			1

Color legend:
AN = anthracite, BL = white, PL = silver, CV = champagne, GR = grey
WG = Wengue wood, PZ = Stone slate, CB = White glass, CN = Black glass, OX = Aluminium (Inox AISI304)

ABB-free@home®
Zenit/Millenium

Sensor/Switch actuator 1/1gang
For switching 230 V~ devices. With integrated actuator. Switching function is available pre-configured. To be used with ABB-free@home® Zenit cover plates for 2 fold push buttons.
Outputs: 1× normally open contact, potential free
Suitable for: resistive
Rated current: 10 A
Rated power: 2300 W
Suitable for: capacitive
Rated current: 10 AX
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	187357	SSA-F-1.1.PB.1	2CKA006220A0232			1

Sensor/Switch actuator 1/1gang, wireless
For switching 230 V~ devices. With integrated actuator. Switching function is available pre-configured. To be used with ABB-free@home® Zenit cover plates for 2 fold push buttons.
Outputs: 1× normally open contact, potential free
Suitable for: resistive
Rated current: 10 A
Rated power: 2300 W
Suitable for: capacitive
Rated current: 10 AX
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	215975	SSA-F-1.1.PB.1-WL	2CKA006200A0108			1

ABB-free@home®

Zenit/Millenium

Switch/actuator, 2/4gang + 1 actuator
For switching 230 V~ devices. With integrated actuator. Switching function is available pre-configured. To be used with ABB-free@home® Zenit cover plates for 4 fold push buttons.
Outputs: 1× normally open contact, potential free
Suitable for: resistive
Rated current: 10 A
Rated power: 2300 W
Suitable for: capacitive
Rated current: 10 AX
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	187364	SSA-F-2.1.PB.1	2CKA006220A0267			1

Switch/actuator, 2/4gang + 1 actuator, wireless
For switching 230 V~ devices. With integrated actuator. Switching function is available pre-configured. To be used with ABB-free@home® Zenit cover plates for 4 fold push buttons.
Outputs: 1× normally open contact, potential free
Suitable for: resistive
Rated current: 10 A
Rated power: 2300 W
Suitable for: capacitive
Rated current: 10 AX
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	215982	SSA-F-2.1.PB.1-WL	2CKA006200A0109			1

ABB-free@home®

Zenit/Millenium

Switch/actuator, 2/4gang + 2 actuator
For switching 230 V~ devices. With integrated actuator. Switching function is available pre-configured. To be used with ABB-free@home® Zenit cover plates for 4 fold push buttons.
Outputs: 2× normally open contact, potential free
Suitable for: resistive
Rated current: 10 A
Rated power: 2 x 1200 W
Suitable for: capacitive
Rated current: 10 AX
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	187371	SSA-F-2.2.PB.1	2CKA006220A0234			1

Switch/actuator, 2/4gang + 2 actuator, wireless
For switching 230 V~ devices. With integrated actuator. Switching function is available pre-configured. To be used with ABB-free@home® Zenit cover plates for 4 fold push buttons.
Outputs: 2× normally open contact, potential free
Suitable for: resistive
Rated current: 10 A
Rated power: 2 x 1200 W
Suitable for: capacitive
Rated current: 10 AX
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	215999	SSA-F-2.2.PB.1-WL	2CKA006200A0110			1

ABB-free@home®
Zenit/Millenium

Switch/dimmer, 1/2gang + 1 dimmer
For dimming 230 V~ loads. With integrated universal dimming actuator
for controlling different lamps. The dimming function is available pre-configured.
To be used with ABB-free@home® Zenit cover plates for 2 fold push buttons.
Outputs: 1× dimming channel
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers
or electronic transformers
Rated power: 10–180 W/VA
Suitable for: LEDi and energy-saving bulbs
Rated power: 2–80 W/VA
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	187388	SDA-F-1.1.PB.1	2CKA006220A0235			1

Switch/dimmer, 1/2gang + 1 dimmer, wireless
For dimming 230 V~ loads. With integrated universal dimming actuator
for controlling different lamps. The dimming function is available pre-configured.
To be used with ABB-free@home® Zenit cover plates for 2 fold push buttons.
Outputs: 1× dimming channel
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers
or electronic transformers
Rated power: 10–180 W/VA
Suitable for: LEDi and energy-saving bulbs
Rated power: 2–80 W/VA
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	216002	SDA-F-1.1.PB.1-WL	2CKA006200A0111			1

ABB-free@home®

Zenit/Millenium

Switch/dimmer, 2/4gang + 1 dimmer
For dimming 230 V~ loads. With integrated universal dimming actuator for controlling different lamps. The dimming function is available pre-configured. To be used with ABB-free@home® Zenit cover plates for 4 fold push buttons.
Outputs: 1× dimming channel
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers
or electronic transformers
Rated power: 10–180 W/VA
Suitable for: LEDi and energy-saving bulbs
Rated power: 2–80 W/VA
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	187395	SDA-F-2.1.PB.1	2CKA006220A0236			1

Switch/dimmer, 2/4gang + 1 dimmer, wireless
For dimming 230 V~ loads. With integrated universal dimming actuator for controlling different lamps. The dimming function is available pre-configured. To be used with ABB-free@home® Zenit cover plates for 4 fold push buttons.
Outputs: 1× dimming channel
Suitable for: 230 V incandescent lamps and low-voltage halogen lamps with conventional transformers
or electronic transformers
Rated power: 10–180 W/VA
Suitable for: LEDi and energy-saving bulbs
Rated power: 2–80 W/VA
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	216019	SDA-F-2.1.PB.1-WL	2CKA006200A0112			1

ABB-free@home®
Zenit/Millenium

Switch/blind actuator, 1/2gang + 1 blind actuator
For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured. To be used in combination with ABB-free@home® Zenit cover plates for 2 fold push buttons.
Outputs: 1× Change-over contacts/normally open contact, potential bound
Rated power: 920 VA
Rated current: 4 A
Suitable for: Operating mode blind
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	187401	SBA-F-1.1.PB.1	2CKA006220A0237			1

Switch/blind actuator, 1/2gang + 1 blind actuator, wireless
For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured. To be used in combination with ABB-free@home® Zenit cover plates for 2 fold push buttons.
Outputs: 1× Change-over contacts/normally open contact, potential bound
Rated power: 920 VA
Rated current: 4 A
Suitable for: Operating mode blind
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	216026	SBA-F-1.1.PB.1-WL	2CKA006200A0113			1

ABB-free@home®

Zenit/Millenium

Switch/blind actuator, 2/4gang + 1 blind actuator
For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured. To be used with ABB-free@home® Zenit cover plates for 4 fold push buttons.
Outputs: 1× Change-over contacts/normally open contact, potential-bound
Rated power: 920 VA
Rated current: 4 A
Suitable for: Operating mode blind
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	187418	SBA-F-2.1.PB.1	2CKA006220A0238			1

Switch/blind actuator, 2/4gang + 1 blind actuator, wireless
For controlling blind and awning motors. With integrated blind actuator. Blind function is available pre-configured. To be used with ABB-free@home® Zenit cover plates for 4 fold push buttons.
Outputs: 1× Change-over contacts/normally open contact, potential-bound
Rated power: 920 VA
Rated current: 4 A
Suitable for: Operating mode blind
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 40.9 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	216033	SBA-F-2.1.PB.1-WL	2CKA006200A0114			1

ABB-free@home®
Zenit/Millenium

Room temperature controller
Room temperature control function for controlling commercially available valve drives or analogue valve drives (continuous controllers) in connection with HA-M-0.6.1, HA-M-0.12.1, FCA-M-2.3.1. With display of set-value temperature. To be used with ABB-free@home® Zenit cover plates for room temperature controller.
Display elements: LCD Display showing operation modes
Protection class of device: IP 20
Mounting depth: 17.9 mm
Dimensions (H × W × D): 44 mm x 44 mm x 29.4 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	188743	RTC-F-1.PB	2CKA006220A0276			1

Room temperature controller, wireless
Room temperature control function for controlling commercially available valve drives or analogue valve drives (continuous controllers) in connection with HA-M-0.6.1, HA-M-0.12.1, FCA-M-2.3.1. With display of set-value temperature. To be used with ABB-free@home® Zenit cover plates for room temperature controller.
Display elements: LCD Display showing operation modes
Protection class of device: IP 20
Mounting depth: 17.9 mm
Dimensions (H × W × D): 44 mm x 44 mm x 29.4 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	216040	RTC-F-1.PB-WL	2CKA006200A0115			1

ABB-free@home®
Zenit/Millenium

Room temperature controller/heating actuator, wireless [1) 2)]
For ABB-free@home®
Heating/cooling operation.
Control element with room temperature controller function.
With display of set-value temperature.
With integrated switch actuator, e.g. for controlling thermoelectric actuating drives in heating/cooling systems or electric floor heating systems.
RTC function is available also without prior programming (preconfigured).
In connection with temperature sensor DP4-T-1 the integrated room temperature controller can be fitted with a remote sensor.
3 wire connection (neutral conductor required).
Only to be used in combination with ABB-free@home® room temperature controller cover plates CP-RTC-XXX. With fixing claws.
Control element: Floating rocker for the selection of set values and operating modes
Display elements: LCD showing operation modes
Rated voltage: 230 V~
Rated frequency: 50 Hz - 60 Hz
Outputs: 1x Normally open contact, potential-bound
Supply voltage: 230 V~
Suitable for: ohmic
Rated current: 16 A
Output voltage: 230 V~
Rated power: 3680 W
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 48 mm
Mounting depth: 32 mm

WIRELESS	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	216057	RTC-F-2.1-1.PB-WL	2CKA006200A0116			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.

Switch 1/2gang
For sending switching, dimming and blind command to an ABB-free@home® actuator.
To be used with ABB-free@home® Zenit cover plates for 2 fold push buttons.
Control element: Switch contacts top/bottom
Display elements: LED for orientation or switch state display
Protection class of device: IP 20
Mounting depth: 14.1 mm
Dimensions (H × W × D): 44 mm x 44 mm x 23.5 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	187258	SU-F-1.0.PB.1	2CKA006220A0222			1

ABB-free@home®

Zenit/Millenium

Switch 1/2gang, wireless

For sending switching, dimming and blind command to an ABB-free@home® actuator.
To be used with ABB-free@home® Zenit cover plates for 2 fold push buttons.
Control element: Switch contacts top/bottom
Display elements: LED for orientation or switch state display
Protection class of device: IP 20
Mounting depth: 14.1 mm
Dimensions (H × W × D): 44 mm x 44 mm x 23.5 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	215951	SU-F-1.0.PB.1-WL	2CKA006200A0106			1

Switch 2/4gang

For sending switching, dimming and blind command to an ABB-free@home® actuator.
To be used with ABB-free@home® Zenit cover plates for 4 fold push buttons.
Control element: Switch contacts top/bottom
Display elements: LED for orientation or switch state display
Protection class of device: IP 20
Mounting depth: 14.1 mm
Dimensions (H × W × D): 44 mm x 44 mm x 23.5 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	187265	SU-F-2.0.PB.1	2CKA006220A0223			1

Switch 2/4gang, wireless

For sending switching, dimming and blind command to an ABB-free@home® actuator.
To be used with ABB-free@home® Zenit cover plates for 4 fold push buttons.
Control element: Switch contacts top/bottom
Display elements: LED for orientation or switch state display
Protection class of device: IP 20
Mounting depth: 14.1 mm
Dimensions (H × W × D): 44 mm x 44 mm x 23.5 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	215968	SU-F-2.0.PB.1-WL	2CKA006200A0107			1

ABB-free@home®
Zenit/Millenium

Movement detector
With select lens for detection with animal access. For automatic switching of ABB-free@home® actuators dependent on movement and brightness.
To be used with ABB-free@home® Zenit cover plates for movement detector.
Detection range: frontal 6 m, lateral 3 m
Detection angle: 180°
Brightness limit value: 1 – 500 lux
Protection class of device: IP 20
Mounting depth: 14.1 mm
Dimensions (H × W × D): 44 mm x 44 mm x 29.6 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	187326	MD-F-1.0.PB.1	2CKA006220A0229			1

Movement detector + 1 actuator
With select lens for detection with animal access. Including an integrated actuator for switching 230 V~ devices. To be used with ABB-free@home® Zenit cover plates for movement detector.
Outputs: 1× normally open contact, potential free
Suitable for: resistive
Rated current: 10 A
Rated power: 2300 W
Suitable for: capacitive
Rated current: 10 AX
Detection range: frontal 6 m, lateral 3 m
Detection angle: 180°
Brightness limit value: 1 – 500 lux
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 47 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	187340	MSA-F-1.1.PB.1	2CKA006220A0231			1

ABB-free@home®

Zenit/Millenium

Movement detector + 1 actuator, wireless
With select lens for detection with animal access. Including an integrated actuator for switching 230 V~ devices. To be used with ABB-free@home® Zenit cover plates for movement detector.
Outputs: 1× normally open contact, potential free
Suitable for: resistive
Rated current: 10 A
Rated power: 2300 W
Suitable for: capacitive
Rated current: 10 AX
Detection range: frontal 6 m, lateral 3 m
Detection angle: 180°
Brightness limit value: 1 – 500 lux
Protection class of device: IP 20
Mounting depth: 31.5 mm
Dimensions (H × W × D): 44 mm x 44 mm x 47 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	216064	MSA-F-1.1.1-WL	2CKA006200A0117			1

ABB-free@home®

DIN-Rail

Power Supply, 640 mA, MDRC
Power supply with integrated choke.
Fast diagnosis due to LED display for operational readiness and errors.
The bus can be connected via enclosed terminal block.
Display elements: Operational load/overload LED
Rated voltage: 127 - 230 V~, +10 % / -15 %
Secondary: 30 V, +2 V / --2 V
Rated frequency: 50 Hz/60 Hz
Outputs: 1
Rated current: 640 mA
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 72 mm x 64 mm
Module width: 4 MW

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	941839	PS-M-64.1.1	2CDG510001R0011			1

USB Interface
For the creation of a central twisted pair line in multi-dwelling applications,
e.g. a Central Weather Station in an appartment building.
Supply voltage: 5 V DC via USB Type B connector
Bus voltage: 24 V (bus connection terminal)
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 36 mm x 64,5 mm
Module width: 2 MW

	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	046618	USB-M-1.1	2CDG510013R0011			

ABB-free@home®

DIN-Rail

Switch Actuator, 4-fold, 16 A, MDRC
For switching 4 independent 127 V~/230 V~ loads. Each contact has a manual operation function independent of auxiliary voltage for additionally displaying the contact setting. The bus can be con-nected via enclosed terminal block.
Outputs: 4
Maximum switching current: 16A
Maximum switching power: 2500 W
Mounting type: DIN rail
Number of inputs: Analog (0 ... 10 V / 4 ... 20 mA) Analog, 0 No unit
Number of LEDs: 1
Rated current: 16 A
Output voltage: 230 V AC
Protection class (Device): IP20
Dimensions: (L x W x D): (90 mm x 70 mm x 63.5 mm)
Module width: 4 MW

	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	111309	SA-M-4.16.2.2	2CDG510025R0011			1

ABB-free@home®

DIN-Rail

Switch Actuator, 8-fold 16 A, MDRC

For switching 8 independent 127 V~/230 V~ loads. Each contact has a manual operation function independent of auxiliary voltage for additionally displaying the contact setting. The bus can be con-nected via enclosed terminal block.
Outputs: 8
Maximum switching current: 16A
Maximum switching power: 2500 W
Mounting type: DIN rail
Number of inputs: Analog (0 ... 10 V / 4 ... 20 mA) Analog, 0 No unit
Number of LEDs: 1
Rated current: 16 A
Output voltage: 230 V AC
Protection class (Device): IP20
Dimensions: (L x W x D): (90 mm x 140 mm x 63.5 mm)
Module width: 8 MW

	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	111316	SA-M-8.16.2.2	2CDG510026R0011			1

Switch Actuator, 12-fold 16 A, MDRC

For switching 12 independent 127 V~/230 V~ loads.
Each contact has a manual operation function independent of auxiliary voltage for addition-ally dis-playing the contact setting.
The bus can be connected via enclosed terminal block.
Outputs: 12
Maximum switching current: 16A
Maximum switching power: 2500 W
Mounting type: DIN rail
Number of inputs; Analog (0 ... 10 V / 4 ... 20 mA) Analog 0 No unit
Number of LEDs: 1
Rated current: 16 A
Output voltage: 230 V AC
Protection class (Device): IP20
Dimensions: (L x W x D): (90 mm x 210 mm x 63.5 mm)
Module width: 12 MW

	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	111330	SA-M-12.16.2.2	2CDG510027R0011			1

ABB-free@home®

DIN-Rail

Switch Actuator, 8-fold, 6 A, MDRC

Combination device with 8 binary inputs and 8 switch actuators. Conventional push-buttons or auxiliary contacts can be connected to 8 channels. The information of the contact enquiry can be used for activating ABB-free@home® actuators or for recording status information.
The contact polling voltage is made available by the device itself.
Maximum cable length at a cable cross-section of 1.5 mm² < 100 m
For switching 8 independent 230 V~ loads.
Bus voltage: 24 V
Inputs: 8
Polling voltage: 32 V-
Outputs: 8 Normally open contact, potential free (for 1 fan)
Suitable for: AC1
Rated current: 6 A, cos ϕ 0.8
Output voltage: 230 V~
Suitable for: AC3
Rated current: 6 A, cos ϕ0.45
Output voltage: 230 V~
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 144 mm x 64.5 mm
Module width: 8 MW

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	945561	SA-M-8.8.1	2CDG510007R0011			1

Heating Actuator, 6-fold, 230 V, MDRC

For controlling thermoelectric actuating drives in heating/cooling systems.
The outputs are protected against short-circuit and overload.
The bus can be connected via enclosed terminal block.
Bus voltage: 24 V
Outputs: 6
Suitable for: ohmic
Rated current: 160 mA
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 72 mm x 64 mm
Module width: 4 MW

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	941815	HA-M-0.6.1	2CDG510008R0011			1

ABB-free@home®

DIN-Rail

Heating Actuator, 12-fold, 230 V, MDRC
For controlling thermoelectric actuating drives in heating/cooling systems.
The outputs are protected against short-circuit and overload.
The bus can be connected via enclosed terminal block.
Bus voltage: 24 V
Outputs: 12
Suitable for: ohmic
Rated current: 160 mA
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 144 mm x 64 mm
Module width: 8 MW

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	941808	HA-M-0.12.1	2CDG510009R0011			1

Fan Coil Actuator, PWM, MDRC
For controlling blower convectors.
Supports 2-pipe and 4-pipe system for heating and cooling.
The fan speed levels can be switched using a changeover or step switch function.
Three contacts for switching a three-stage fan.
Two contacts for activating the heating and cooling valves.
Supports 24V and 230V valves.
With two binary inputs for connecting dewpoint and condensation contacts.
The scanning voltage is provided by the device.
The bus connection is provided via the enclosed bus terminal.
Bus voltage: 24 V
Inputs: 2
Polling voltage: 10 V-
Outputs: 3 Normally open contact, potential free
Suitable for: AC3
Rated current: 6 A
Output voltage: 230 V~
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 108 mm x 64.5 mm
Module width: 6 MW

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	945592	FCA-M-2.3.1	2CDG510010R0011			1

ABB-free@home®

DIN-Rail

Blind Actuator, 4-fold, 230 V, MDRC
For controlling 4 independent blind or roller shutter drives. The outputs are inversely blocked. The bus can be connected via enclosed terminal block.
Outputs: 4
Maximum switching current: 6A
Maximum switching power: 1200 W
Mounting type: DIN rail
Number of inputs; Analog (0 ... 10 V / 4 ... 20 mA) Analog 0 No unit
Number of LEDs: 1
Rated current: 6 A
Output voltage: 230 V AC
Protection class (Device): IP20
Dimensions: (L x W x D): (90 mm x 70 mm x 63.5 mm)
Module width: 4 MW

	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	111347	BA-M-4.230.1.1	2CDG510028R0011			1

Blind Actuator, 8-fold 230 V, MDRC
For controlling 8 independent blind or roller shutter drives. The bus can be connected via enclosed terminal block.
Outputs: 8
Maximum switching current: 6A
Maximum switching power: 1200 W
Mounting type: DIN rail
Number of inputs; Analog (0 ... 10 V / 4 ... 20 mA) Analog 0 No unit
Number of LEDs: 1
Rated current: 6 A
Output voltage: 230 V AC
Protection class (Device): IP20
Dimensions: (L x W x D): (90 mm x 140 mm x 63.5 mm)
Module width: 8 MW

	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	111354	BA-M-8.230.1.1	2CDG510029R0011			1

ABB-free@home®

DIN-Rail

Dim actuator 4 x 210 W, MDRC
Multichannel universal dimming actuator optimised for dimming retrofit LED lamps (LEDi).
Also suitable for dimming incandescent lamps, low-voltage halogen lights with conventional or electronic transformers, 230 V halogen lamps and dimmable energy-saving halogen lamps.
Automatic load detection (can be deactivated).
Separate N-connection per channel.
Parallel connection of the outputs possible to increase the output power.
Outputs can be connected in parallel in any configuration.
Minimum load: 2 W.
Manual operation on device also possible without bus voltage or in an unprogrammed status.
Programming of the device also possible without applied 230 V supply voltage.
With integrated bus coupler.
Nominal power at 230 V~ mains voltage:
230 V~ incandescent and halogen lamps: 4 x 210 W/VA to 1 x 600 W/VA.
Dimmable 230 V~ LEDi: 4 x 210 W/VA to 1 x 600 W/VA in trailing edge control, 4 x 80 W/VA to 1 x 200 W/VA in leading edge control.
Inductive L-transformers with LED/low-voltage halogen lamp: 4 x 210 W/VA to 1 x 600 W/VA.
Electronic C-transformers with LED/low-voltage halogen lamp: 4 x 210 W/VA to 1 x 600 W/VA.
Electronic LC-transformers with LED/low-voltage halogen lamp: 4 x 80 W/VA to 1 x 200 W/VA.
Control element: One LED button per channel (including a colour status indication) for switching ON and OFF, as well as dimming up and down.
Bus voltage: 24 V
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 4x dimming channel
Protection class (device): IP 20
Temperature range (device): -5 °C - 45 °C
Storage temperature range: -20 °C - 70 °C
Dimensions: (L x W x D): 90 mm x 108 mm x 64 mm
Module width: 6
Mounting depth: 68 mm
Programming only with bus voltage applied via the web interface of the System Access Point.
Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current Online-Catalogue.
Recommendation: Always use lamps of the same type and manufacturer.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	251799	DA/M.4.210.2.1	2CKA006220A0729			1

ABB-free@home®

DIN-Rail

Dim actuator 4x315W, MDRC

Multichannel universal dimming actuator optimised for dimming retrofit LED lamps (LEDi). Also suitable for dimming incandescent lamps, low-voltage halogen lights with conventional or electronic transformers, 230 V halogen lamps and dimmable energy-saving halogen lamps. Automatic load detection (can be deactivated). Separate N-connection per channel. Parallel connection of the outputs possible to increase the output power. Outputs can be connected in parallel in groups. Minimum load: 2 W. Manual operation on device also possible without bus voltage or in an unprogrammed status. Programming of the device also possible without applied 230V supply voltage. Extensive test and diagnosis functions for the i-Bus tool. Fast parameter setting in ETS using copyable channel templates. With integrated bus coupler.
Nominal power at 230 V~ mains voltage: 230 V~ incandescent and halogen lamps: 4 x 315 W/VA to 2 x 500 W/VA in trailing edge control, 4 x 120 W/VA to 2 x 200 W/VA in leading edge control. Dimmable 230 V~ LEDi: 4 x 315 W/VA to 2 x 500 W/VA in trailing edge control, 4 x 120 W/VA to 2 x 200 W/VA in leading edge control. Inductive L-transformers with LED/low-voltage halogen lamp: 4 x 315 W/VA to 2 x 500 W/VA. Electronic C-transformers with LED/low-voltage halogen lamp: 4 x 315 W/VA to 2 x 500 W/VA. Electronic LC-transformers with LED/low-voltage halogen lamp: 4 x 120 W/VA to 2 x 200 W/VA.
Control element: One LED button per channel (including a colour status indication) for switching ON and OFF, as well as dimming up and down.
Bus voltage: 24 V
Rated voltage: 230 V~ +10 % / -10 %
Rated frequency: 50 Hz / 60 Hz
Outputs: 4 dimming channel
Protection class (device): IP 20
Temperature range (device): -5 °C - 45 °C
Storage temperature range: -20 °C - 70 °C
Dimensions: (L x W x D): 90 mm x 144 mm x 64 mm
Module width: X
Mounting depth: 68 mm
Programming only with bus voltage applied via the web interface of the System Access Point. For software and description please check the current Online-Catalogue. 1 MW ≙ 18 mm.
Recommendation: Always use lamps of the same type and manufacturer.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	276679	DA/M.4.315.2.1	2CKA006220A0838			1

ABB-free@home®

DIN-Rail

Dim actuator 6x210W, MDRC
Multichannel universal dimming actuator optimised for dimming retrofit LED lamps (LEDi).
Also suitable for dimming incandescent lamps, low-voltage halogen lights with conventional or electronic transformers, 230 V halogen lamps and dimmable energy-saving halogen lamps.
Automatic load detection (can be deactivated).
Separate N-connection per channel.
Parallel connection of the outputs possible to increase the output power.
Outputs can be connected in parallel in any configuration.
Minimum load: 2 W.
Manual operation on device also possible without bus voltage or in an unprogrammed status.
Programming of the device also possible without applied 230 V supply voltage.
With integrated bus coupler.
Nominal power at 230 V~ mains voltage:
230 V~ incandescent and halogen lamps: 6 x 210 W/VA to 1 x 800 W/VA.
Dimmable 230 V~ LEDi: 6 x 210 W/VA to 1 x 800 W/VA in trailing edge control, 6 x 80 W/VA to 1 x 240 W/VA in leading edge control.
Inductive L-transformers with LED/low-voltage halogen lamp: 6 x 210 W/VA to 1 x 800 W/VA.
Electronic C-transformers with LED/low-voltage halogen lamp: 6 x 210 W/VA to 1 x 800 W/VA.
Electronic LC-transformers with LED/low-voltage halogen lamp: 6 x 80 W/VA to 1 x 240 W/VA.
Control element: One LED button per channel (including a colour status indication) for switching ON and OFF, as well as dimming up and down.
Bus voltage: 24 V
Rated voltage: 110 - 230 V~, +10 % / -10 %
Rated frequency: 50 Hz - 60 Hz
Outputs: 6x dimming channel
Protection class (device): IP 20
Temperature range (device): -5 °C - 45 °C
Storage temperature range: -20 °C - 70 °C
Dimensions: (L x W x D): 90 mm x 144 mm x 64 mm
Module width: 8
Mounting depth: 68 mm
Programming only with bus voltage applied via the web interface of the System Access Point.
Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current Online-Catalogue.
Recommendation: Always use lamps of the same type and manufacturer.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	252031	DA/M.6.210.2.1	2CKA006220A0731			1

ABB-free@home®

DIN-Rail

DALI Gateway, MDRC

The device is used to interface between DALI and free@home installations and incorporates the DALI power supply. One DALI output for up to 16 DALI Slaves.
Bus voltage: 24 V
Rated voltage: 100 – 240 V ~
Rated frequency: 50 Hz, 60 Hz
DALI outputs: 1
Protection class (device): IP 20
Dimensions: (L x W x D): 90mm x 72 mm x 64 mm

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	067409	DG-M-1.16.1	2CDG510012R0011			1

Split Unit Gateway, FM

The device is used to interface between the free@home system and many manufacturers' air conditioners, so-called split units. The device converts the free@home telegrams into infrared commands and transmits them to the split unit. The transmitter of the supplied cable is bonded directly onto the split unit's receiver. The split unit then no longer receives the commands from a remote control. Instead, it can be operated via any free@home sensors. The model of the split unit can be selected during commissioning. Auxiliary voltage is not required.
Bus voltage: 24 V
Outputs: 1
Protection class (device): IP 20
Dimensions: (L x W x D): 39mm x 40 mm x 12 mm

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	945578	SUG-F-1.1	2CDG510005R0011			1

ABB-free@home®

DIN-Rail

Binary Input, FM
Conventional push-buttons or auxiliary contacts can be connected to 2 / 4 channels.
The information of the contact enquiry can be used for activating ABB-free@home® actuators or for recording status information. The contact polling voltage is made available from the binary input itself. Extension of the connecting cables possible by a maximum of 10 m.
Flush-mounted device for installation in a 60 mm device box or distribution box.
The bus can be connected via enclosed terminal block.
Bus voltage: 24 V
Inputs: 2 / 4
Polling voltage: 20 V-,
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 39 mm x 40 mm x 12 mm

	Bbn 4053546	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	111590	BI-F-2.0.2	2CDG510023R0011			1
	111613	BI-F-4.0.2	2CDG510024R0011			1

ABB-free@home®

DIN-Rail

Binary Input, 230 V, MDRC

Detects AC/DC signals in the voltage range from 10...230 V. The binary inputs enable detection of independent input signals. Each channel can be connected with conventional push-buttons or auxiliary contacts. The information can be used to control free@home actuators or to indicate status information. The devices are powered via the free@home bus and do not require an additional power supply.

4 fold

Bus voltage: 24 V
Inputs: 4
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 36 mm x 63.5 mm
Module width: 2 MW

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	111170	BI-M-4.230.1.1	2CDG510016R0011			1

10 fold

Bus voltage: 24 V
Inputs: 4
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 70 mm x 63.5 mm
Module width: 4 MW

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	111194	BI-M-10.230.1.1	2CDG510017R0011			1

ABB-free@home®

DIN-Rail

Binary Input, Contact scanning, MDRC

Scans floating contacts with internally generated scanning voltage. No external Voltage needed. The binary inputs enable detection of independent input signals. Each channel can be connected with conventional push-buttons or auxiliary contacts. The information can be used to control free@home actuators or to indicate status information. The devices are powered via the free@home bus and do not require an additional power supply.

4 fold

Bus voltage: 24 V
Inputs: 4
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 36 mm x 63.5 mm
Module width: 2 MW

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	111132	BI-M-4.20.1.1	2CDG510014R0011			1

10 fold

Bus voltage: 24 V
Inputs: 4
Protection class (Device): IP 20
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 90 mm x 70 mm x 63.5 mm
Module width: 4 MW

	Bbn 4016779	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	111156	BI-M-10.20.1.1	2CDG510015R0011			1

ABB-free@home®

Communicative and competent – The ABB partner close to you

Advice and assistance close to you. Your electrician will be happy to explain to you in detail the advantages of ABB-free@home® in a face-to-face discussion. This will allow home automation to be planned to suit your individual requirements.

The suitable electrician
The electrician familiar with ABB-free@home® can be found at www.abb.com/freeathome. Simply enter your postcode – and the firms in your region will be displayed.

Now scan the QR code to find out more about the advantages of ABB-free@home®.

Wireless solution
For quick and easy installation

The energy harvesting Smart Switch and the wireless flush-mounted actuators are ideal for renovations and new builds.

Flush-mounted actuators
The flush-mounted actuators for switching, dimming or controlling blinds can be easily installed in a deep installation box. They can be controlled by the Smart Switch or any other ABB wireless control element or by conventional push buttons directly connected to the extension input.

Program with the ABB-free@home® Next app
The programming and operation of the wireless actuators and the Smart Switch is carried out via the ABB-free@home® Next app. Here, the devices can be linked as desired and assigned to functions. The smartphone is connected with the devices via via Bluetooth or NFC (BT pills and NFC Smart Switch).

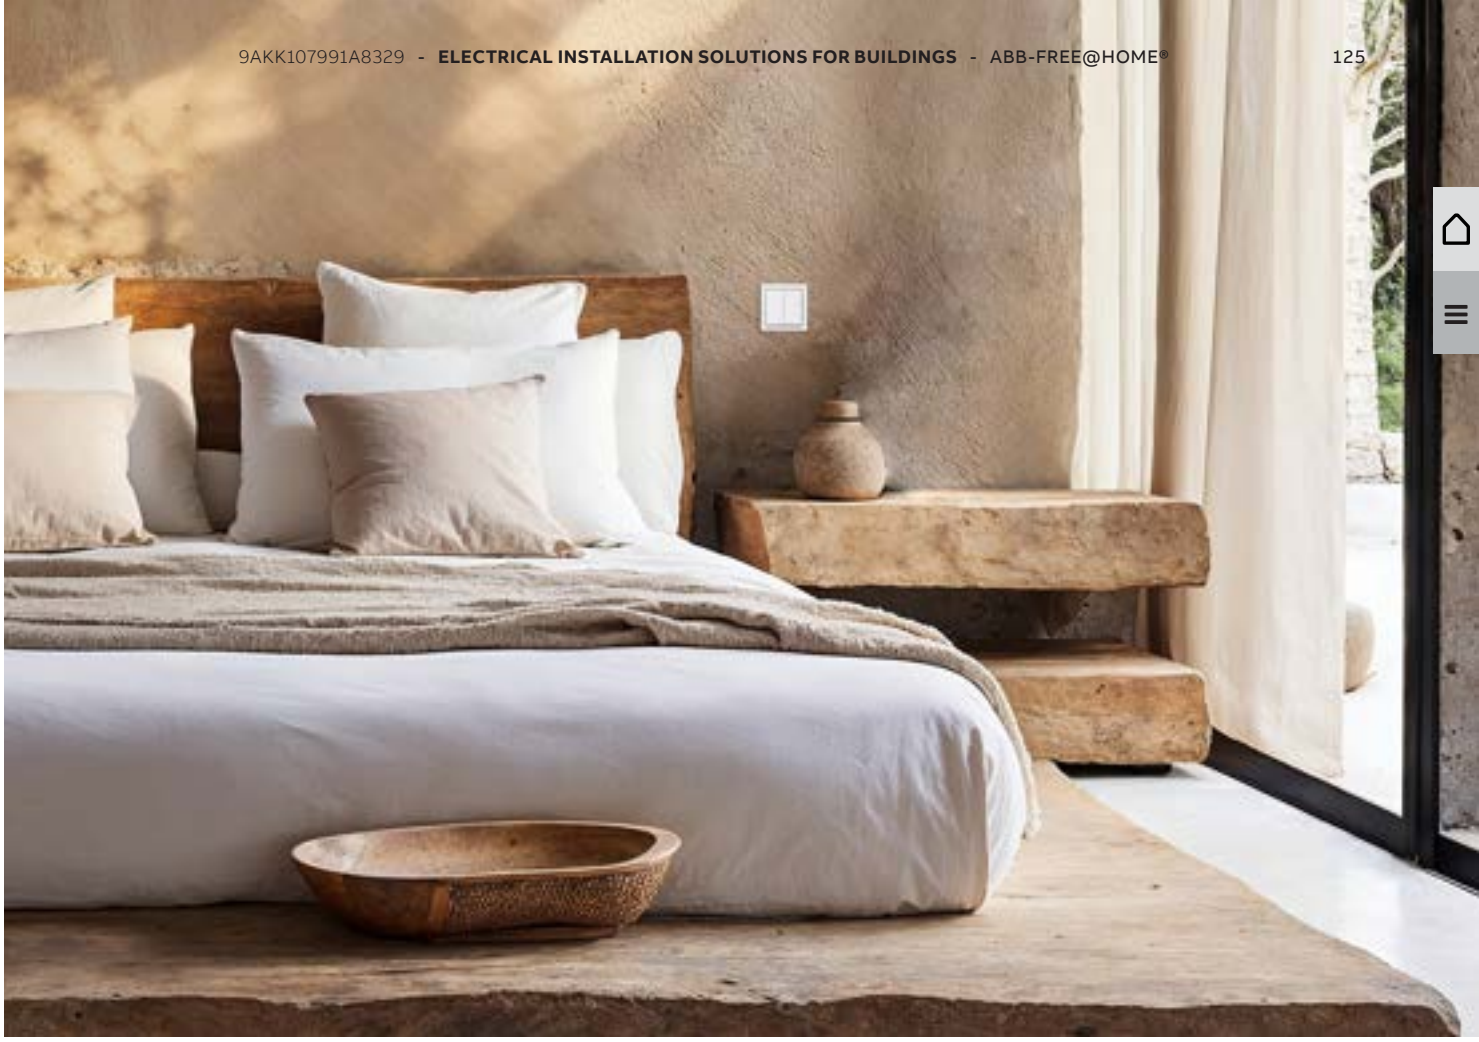

ABB-free@home® wireless actuators and Smart Switch

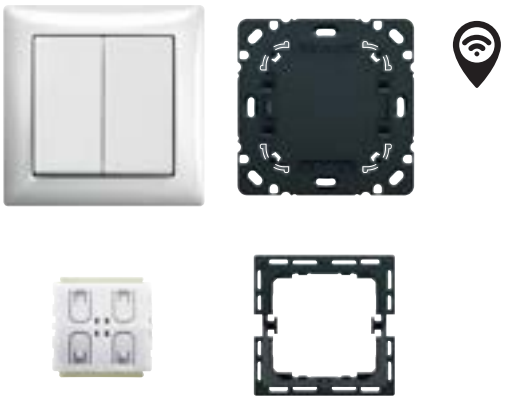

Smart Switch
Balance/Art linear
62721/01 U-WL-500

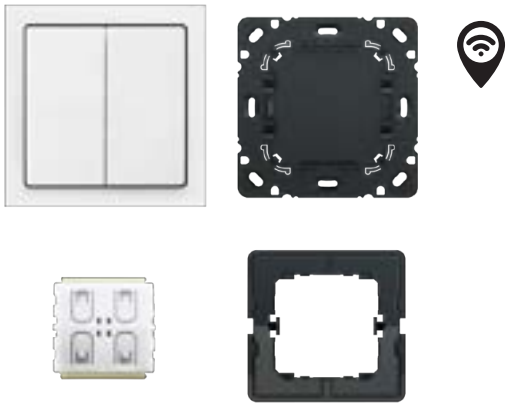

Smart Switch
Future/Solo
62721 U-WL-500

Switch Actuator 1gang, FM, WL
62811 U-WL-500



Switch Actuator 2gang, WL, 230V
62821 U-WL-500

Dimming Actuator 1gang, FM, WL
62851 U-WL-500



Blind Actuator 1gang, FM, WL
62831 U-WL-500

Binary Input 6gang, WL, 230V
62870/6.0 U-WL-500



The buttons of the Smart Switch wireless can be assigned up to four functions. These can be scenes, individual actuators or any other function in ABB-free@home®. Long and short button presses for switching, dimming and blinds are therefore easy to implement.

ABB Smart Switch

Wireless and smart
Smart switch for wireless control of any ABB-free@home® function. The transmitter generates the required energy when actuated (energy harvesting) and therefore can be placed anywhere

Transmitting energy is generated when switching (Energy Harvesting)

Wireless flush mounted actuators

The wireless actuators can be used in device and room control, but also in combination with an extended system to control the entire home. It can also be controlled via the app using Bluetooth.

Parameters
Simple configuration via smartphone app

Timer
Integrated astro function/timer

Device control via Bluetooth interface
Direct connection to smartphone

Room control via remote control
Via the ABB-free@home® Next app and myABB account

Complete home control via ABB-free@home® wireless
For connection to a free@home System Access Point

Device control

Standalone operation of actuactors. Local control and configuration of the corresponding insert via app using Bluetooth. Several actuactors can be compiled into one project in the app in order to simplify switching between devices

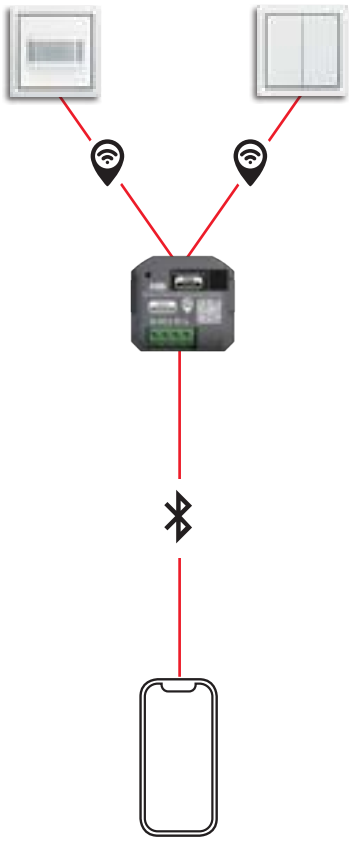

Room control

Networking of 32 devices via the ABB-free@home® wireless protocol. No System Access Point required. For wireless connection, myBuildings portal registration is required

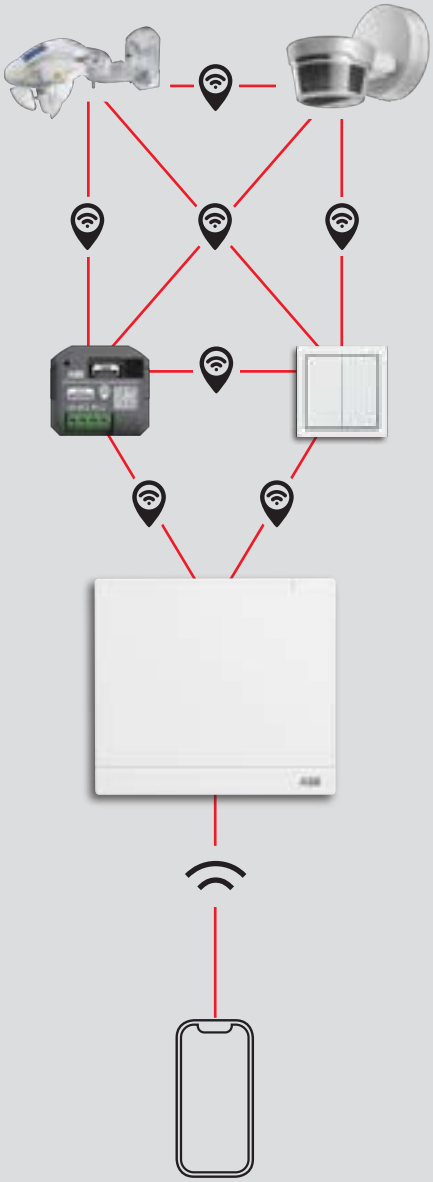

Home control

Networking of devices via ABB-free@home® wireless protocol to the ABB-free@home® System Access Point. Full networkability with complete functionality such as voice control, external access, and much more, also in combination with wired devices.

ABB-free@home®

Flush mounted actuators wireless

Switch Actuator 1gang, WL, 230V NEW

Flush mounted actuator wireless for switching of lighting systems. Device control or networking of up to 32 devices (room control). Integration in ABB-free@home® wireless with System Access Point up to 150 devices. 3 wire connection (neutral conductor required). With plug clamps. With extension input. Operation also possible via conventional push buttons or switches. Remote operation via Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® Next App or the web interface of the System Access Point.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
Switch Actuator 1gang, WL, 230V	346433	62811 U-WL-500	2CKA006710A0034			1

Blind Actuator 1gang, WL, 230V NEW

Flush mounted actuator wireless for the control of roller shutters, blind and awning motors with me-chanical or electronic limit switch shut-off. Device control or networking of up to 32 devices (room control). Integration in ABB-free@home® wireless with System Access Point up to 150 devices. 3 wire connection (neutral conductor required). With plug clamps. With extension input. Operation also possible via conventional push buttons or switches. Remote operation via Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® Next App or the web interface of the System Access Point.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
Blind Actuator 1gang, WL, 230V	346365	62831 U-WL-500	2CKA006710A0041			1

Switch Actuator 2gang, WL, 230V NEW

Flush mounted actuator wireless for switching of lighting systems. Device control or networking of up to 32 devices (room control). Integration in ABB-free@home® wireless with System Access Point up to 150 devices. 3 wire connection (neutral conductor required). With plug clamps. With extension input. Operation also possible via conventional push buttons or switches. Remote operation via Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® Next App or the web interface of the System Access Point.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
Switch Actuator 2gang, WL, 230V Q4 / 25	363379	62821 U-WL-500	2CKA006710A0057			1

ABB-free@home®

Flush mounted actuators wireless

Dimming Actuator 1gang, WL, 230V NEW

Flush mounted actuator wireless for switching and dimming of lighting systems.
Device control or networking of up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
2-wire connection (neutral conductor not required).
Neutral conductor optionally connectable (recommended for the connection of low loads < 3 W/VA). With plug clamps.
With extension input.
Operation also possible via conventional push buttons or switches.
Remote operation via Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® Next App or the web interface of the System Access Point.
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
Dimming Actuator 1gang, WL, 230V	346396	62851 U-WL-500	2CKA006710A0038			1

Binary Input 6gang, WL, 230V NEW

Flush mounted binary input wireless. Conventional push-buttons or auxiliary contacts can be connected to 6 channels. The information of the contact enquiry can be used for activating ABB-free@home® and flexTronics wireless. Inputs can also be configured as outputs to control status LEDs.
The contact polling voltage (6V DC) is made available from the binary input itself. Extension of the connecting cables possible by a maximum of 10 m.
networking of up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
Programming via Bluetooth with the ABB-free@home® Next App or the web interface of the System Access Point.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
Binary Input 6gang, WL, 230V	341568	62870/6.0 U-WL-500	2CKA006710A0043			

ABB-free@home®

Smart Switches wireless

Rocker 1gang, without printing NEW

As cover for Smart Switches.

Busch-art linear®

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
44G white	342602	6735 BT-44G	2CKA001751A3413			1
44M white matt	342619	6735 BT-44M	2CKA001751A3414			1
45M black matt	342633	6735 BT-45M	2CKA001751A3416			1

Rocker 1gang, without printing NEW

As cover for Smart Switches.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
81 anthracite	306871	6735 BT-81	2CKA006730A0142			1
82 ivory white	306895	6735 BT-82	2CKA006730A0143			1
83 aluminium silver	306932	6735 BT-83	2CKA006730A0144			1
84 studio white	306901	6735 BT-84	2CKA006730A0145			1
866 stainless steel	306925	6735 BT-866	2CKA006730A0148			1
884 studio white matt	306963	6735 BT-884	2CKA006730A0149			1
885 black matt	306963	6735 BT-885	2CKA006730A0150			1

ABB-free@home®

Smart Switches wireless

Rocker 2gang, without printing NEW

As cover for Smart Switches.

Busch-art linear®

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
44G white	342640	6736 FoH-44G	2CKA006730A0166			1
44M white matt	342657	6736 FoH-44M	2CKA006730A0167			1
45M black matt	342657	6736 FoH-45M	2CKA006730A0169			1

Rocker 2gang, without printing NEW

As cover for Smart Switches.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
81 anthracite	276617	6736 FoH-81	2CKA006730A0133			1
82 ivory white	276624	6736 FoH-82	2CKA006730A0134			1
83 aluminium silver	275085	6736 FoH-83	2CKA006730A0135			1
84 studio white	276631	6736 FoH-84	2CKA006730A0136			1
866 stainless steel	275139	6736 FoH-866	2CKA006730A0139			1
884 studio white matt	275146	6736 FoH-884	2CKA006730A0140			1
885 black matt	275153	6736 FoH-885	2CKA006730A0141			1

ABB-free@home®

Smart Switches wireless

Rocker 1gang, with “Blind” icon NEW

As cover for Smart Switches.

Busch-art linear®

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
44G white	341742	6735-11-44G	2CKA006220A0993			1
44M white matt	341759	6735-11-44M	2CKA006220A0994			1
45M black matt	341773	6735-11-45M	2CKA006220A0996			1

Rocker 1gang, without printing NEW

As cover for Smart Switches.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
81 anthracite	341667	6735-11-81	2CKA006220A0985			1
82 ivory white	341674	6735-11-82	2CKA006220A0986			1
83 aluminium silver	341681	6735-11-83	2CKA006220A0987			1
84 studio white	341698	6735-11-84	2CKA006220A0988			1
866 stainless steel	341711	6735-11-866	2CKA006220A0990			1
884 studio white matt	341728	6735-11-884	2CKA006220A0991			1
885 black matt	341735	6735-11-885	2CKA006220A0992			1

ABB-free@home®

Smart Switches wireless

Smart Switch, WL
Smarter light-/blind switch for wireless control of ABB-flexTronics® wireless and ABB-free@home® devices.
Wall-mounted transmitter, 2/4 channels.
Device control or networking of up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required.
Programming with the ABB-free@home® Next App. Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Combinable with the Busch-Jaeger switch range Busch-art linear®.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	352267	62721/01 U-WL-500	2CKA006710A0052			1

Smart Switch, WL
Smarter light-/blind switch for wireless control of ABB-flexTronics® wireless and ABB-free@home® devices.
Wall-mounted transmitter, 2/4 channels.
Device control or networking of up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required.
Programming with the ABB-free@home® Next App. Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	341612	62721 U-WL-500	2CKA006710A0048			1

ABB-free@home®

Installation Standards WL

VDE (wireless)

01 02 03 04 05

01 Insert
02 Control element
03 Rocker
04 Cover frame
05 Sensor unit

ABB-free@home®

System devices wireless

free@home window sensor, wireless [1) 2)]
For monitoring of the current window handle position.
The status can be visualized on the free@home panel and in the free@home app.
The window sensor is installed between the existing window handle and the window frame.
Existing window handle is used.
Suitable for window handle: 7 mm square fastener, 43 mm
attachment screw separation, lifter dia. 10 and 12 mm, max.
mounting plate size 34 x 77 mm (WxH). No wire laying required.
Mounting accessories (square extension, screws, adapter for cams) are included.
Battery included.
Low Battery notification via the free@home app.
Protection class (Device): IP 43
Temperature range (Device): -5 °C to 50 °C
Dimensions: (L x W x D): 168 mm x 38 mm x 13 mm

WIRELESS	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
64 studio white matt	215906	WBI-S-1-64-WL	2CKA006200A0101			1
65 basalt black	215920	WBI-S-1-65-WL	2CKA006200A0103			1
66 stainless steel	232484	WBI-S-1-66-WL	2CKA006200A0142			1

free@home universal detector, wireless [1) 2)]
For monitoring of the state (open, closed) of windows, skylights, doors and gates with a magnetic contact.
Additional connection option for an external, potential-free sensor
(choice of normally closed or normally open contact).
The status can be visualized on the free@home panel and in the free@home app.
The magnetic contact and the potential-free input can be monitored separately.
The universal detector and the magnets are fixed with adhesive film or screws.
Accessories (adhesive foil, screws, magnet) included in delivery.
Battery type: CR2
Low Battery notification via the free@home app.
External sensor max. wire length: 5 m
External sensor terminal connection diameter : 0.14...0.5 mm² (single wire)
Protection class (Device): IP 43
Temperature range (Device): -5 °C to 50 °C
Dimensions: (L x W x D): 118 mm x 30 mm x 22 mm

WIRELESS	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
64 studio white matt	215913	BI-S-1-64-WL	2CKA006200A0102			1
65 basalt black	215937	BI-S-1-65-WL	2CKA006200A0104			1

1) Programming only with bus voltage applied via the web interface of the System Access Point.
2) Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current e-catalogue.

ABB-free@home®

Weather wireless

Weather station flex, WL
Weather data can be linked with actuators to automatically control functions.
Weather data can be visualized in the free@home web interface and the free@home Next app.
Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the free@home Next app.
For ABB-flexTronics®.
Rated voltage: 110 V~230 V~, +10 % / -15 %
Rated frequency: 50 Hz / 60 Hz
Protection class (device): IP 44
Temperature range (device): -20 °C - 55 °C
Storage temperature range: -25 °C - 70 °C
Dimensions: (L x W x D): 108 mm x 121 mm x 227 mm
For software and description please check the current Online-Catalogue.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
	292174	WS-1-WL.1	2CKA006200A0297			1

Mast adapter weather station
For fixing the weather station to the mast or corner. Mast diameter 48-60 mm

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
	304181	WS-1/A1.1	2CKA006200A0848			1

Notes

ABB-FLEXTRONICS®

Electrical installation solutions for buildings
ABB-flexTronics®

Index

What is ABB-flexTronics®?	2
Product features and functions	4
PlusWire®	6
ABB-flexTronics® wireless	8
Device control	10
Room control	13
Product range overview	16
Wireless flush-mounted actuators and energy harvesting Smart Switch	18

ABB-flexTronics®

Installation	22
Inserts	23
Control elements	28
Control elements wireless	29
Sets wireless	30
User Operation - Compatible switch ranges	31
User Operation - ABB Trevion®	44
Comfort switch	52
Motion detectors	54
Presence detectors	60
Motion detectors wireless	64

Compatible wireless devices

Flush-mounted actuators and binary input	68
Smart Switches	70
Wireless RTC	74
Weather station	78
Busch-Watchdog PRO	79

What is ABB-flexTronics®?

ABB-flexTronics® is a versatile solution designed for seamless integration with existing electrical systems, compatible with standard wall switches.

It allows users to control individual devices, such as lights or blinds, through wired connections. The system is designed for future scalability, enabling easy upgrades to ABB-flexTronics® wireless by simply replacing the conventional control element or motion detector with the wireless version – thanks to the insert that supports all wireless operation options. Whether you choose a wired or wireless setup, everything begins with the flexTronics insert. That is the flexibility of ABB-flexTronics®.

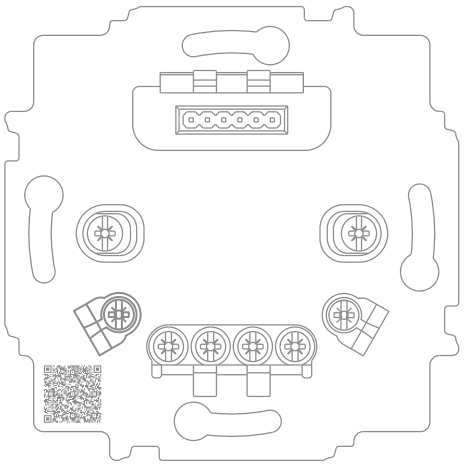

ABB-flexTronics®

Conventional wired solution
Device control, single operation

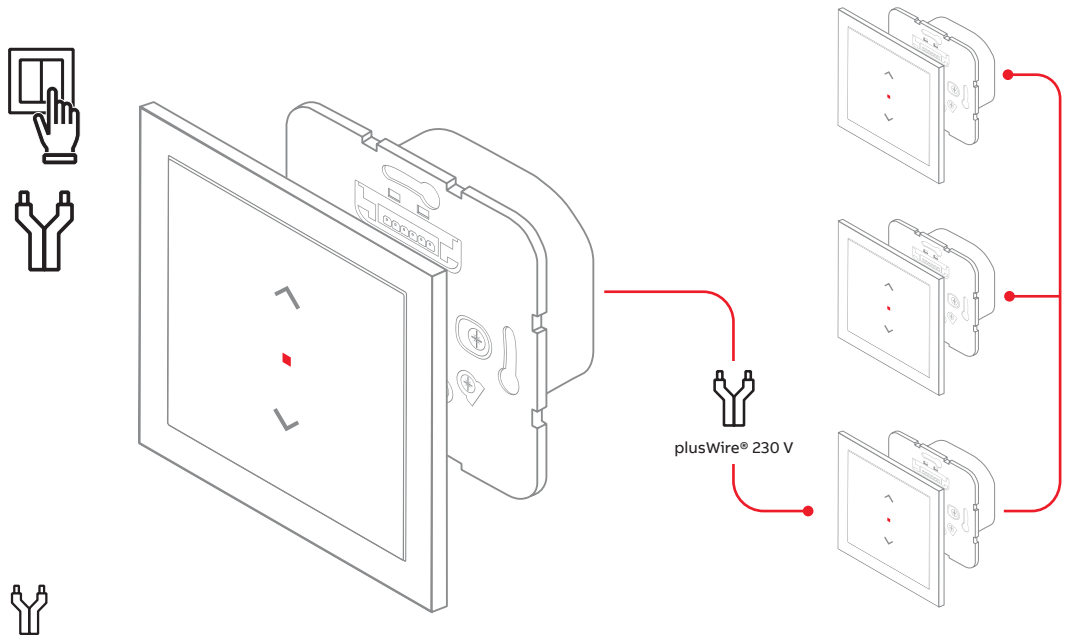

Manual Bluetooth Wireless plusWire®

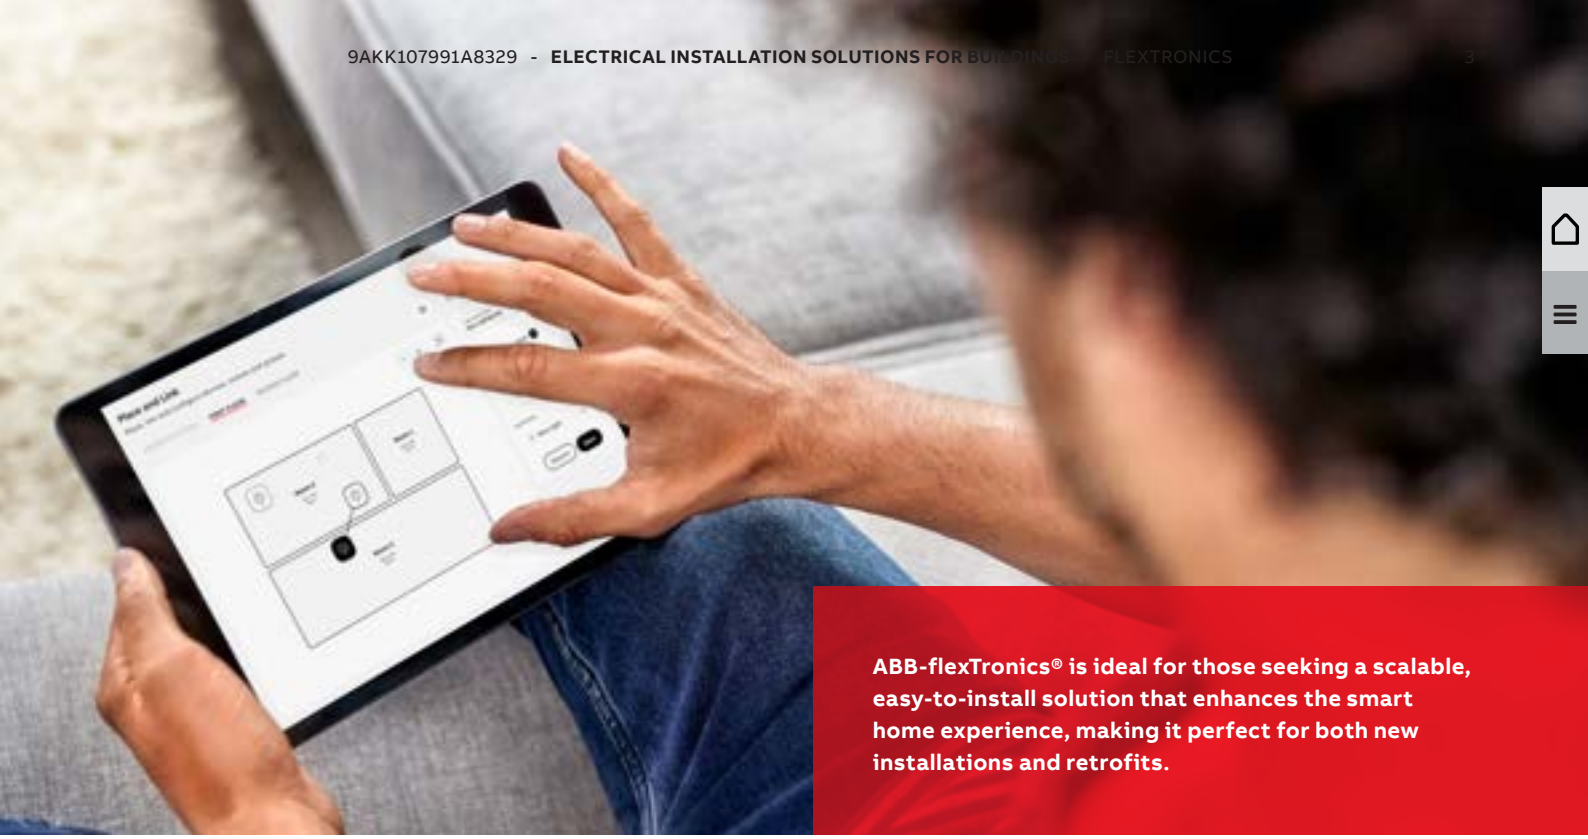

ABB-flexTronics® is ideal for those seeking a scalable, easy-to-install solution that enhances the smart home experience, making it perfect for both new installations and retrofits.

ABB-flexTronics® wireless

Wireless solution

Device control and room control

App control + conventional control

Device control

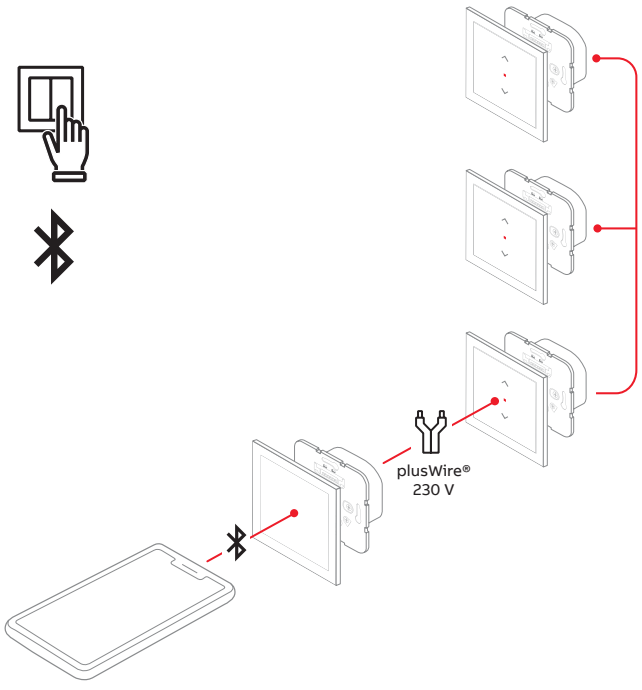

Room control

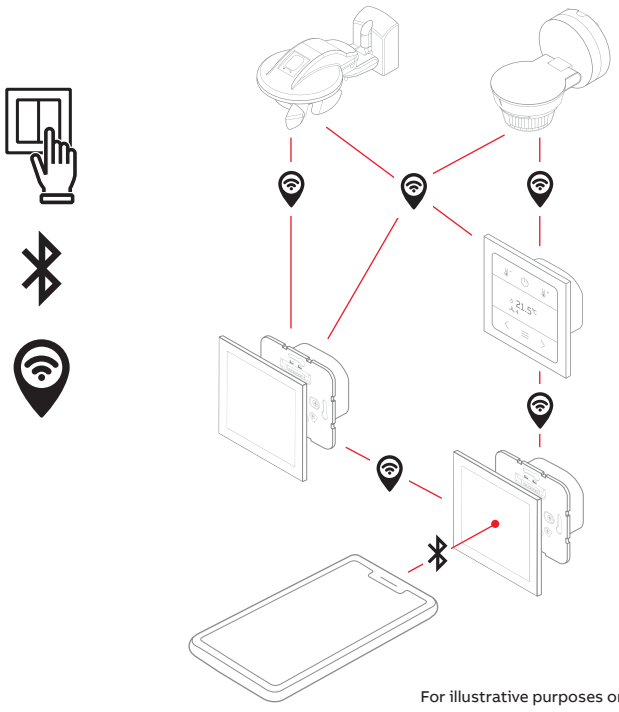

For illustrative purposes only

ABB-flexTronics® and ABB-flexTronics® wireless product features and functions

ABB-flexTronics® is a sophisticated, scalable solution designed for both wired and wireless control of home devices such as lights, blinds, room temperature and more. It is ideal for those looking to start with a simple setup and expand into a comprehensive smart home system.

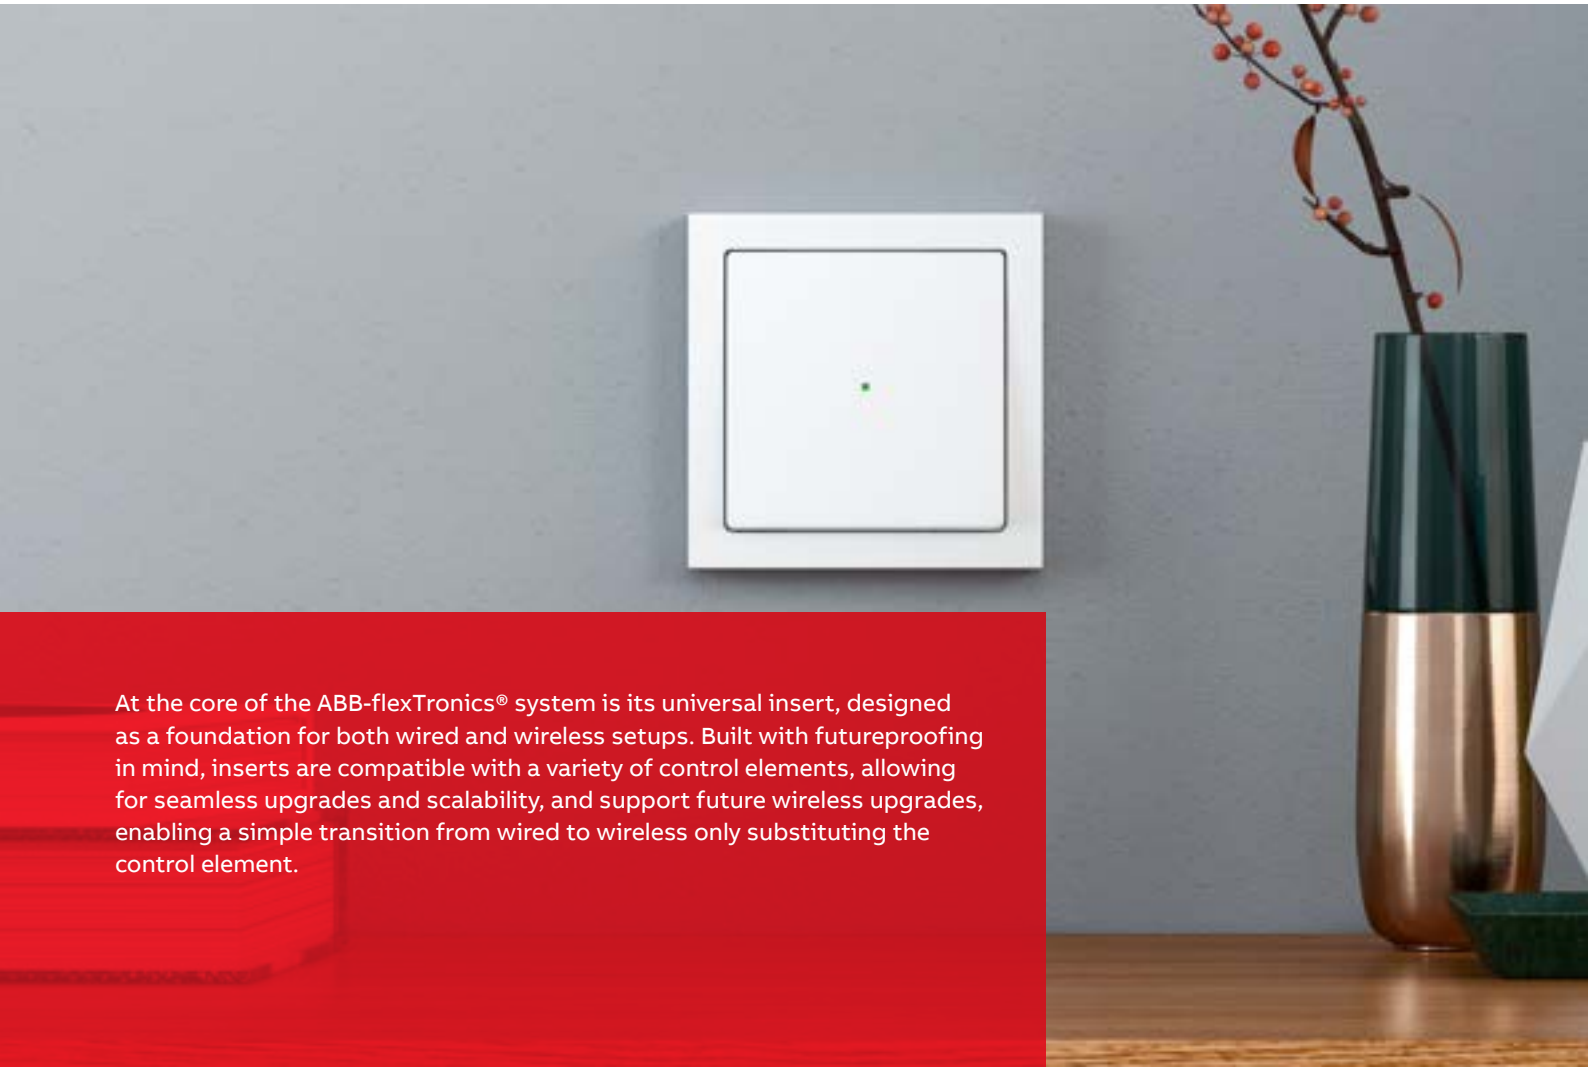

At the core of the ABB-flexTronics® system is its universal insert, designed as a foundation for both wired and wireless setups. Built with futureproofing in mind, inserts are compatible with a variety of control elements, allowing for seamless upgrades and scalability, and support future wireless upgrades, enabling a simple transition from wired to wireless only substituting the control element.

Device control, single operation

ABB-flexTronics® single operation device control
The wired setup is designed for simple, standalone operation, like conventional electrical systems. Allows for the direct control of individual devices like lights and blinds through wired connections. And with plusWire it is also possible to create groups of blinds/lights.

- **Stand-alone operation**
- **Familiar operation as with a conventional control element**
- **Additional features like value/position memory for rocker switches, presets, groups**

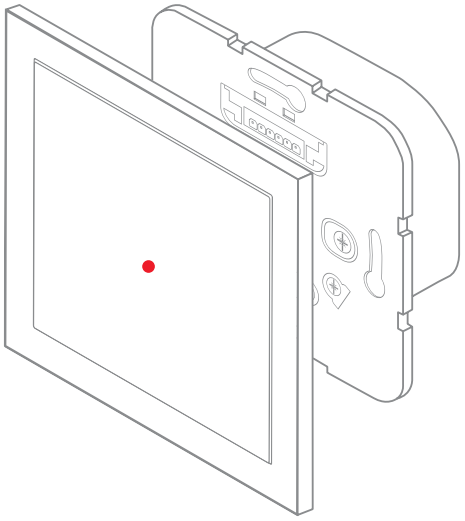

Blind control
ABB-flexTronics® blind inserts enable manual control of roller shutters, awnings, or Venetian blinds. The blinds can be fully opened, closed, or positioned at specific angles using a pushbutton.

Lighting control
Centralized switching and dimming of lights within a room is possible, with options to recall preset brightness levels or create specific lighting presets.

Motion and presence detectors
Integration with ABB-Watchdog® 180 flex motion sensors and presence detectors for automated control of lights and other devices based on movement and ambient light levels.

Room temperature control
The room temperature controller offers flexible heating and cooling, including ECO mode for energy savings. Control it locally or remotely via the app for easy temperature management.

The control elements from ABB-flexTronics® enable the classic control of light and blinds. Available in 1-gang and 2-gang rocker designs, these controls let you access preset brightness levels and blind positions and integrate seamlessly with motion and presence detectors.

plusWire®

The modern extension operation for even more flexibility
plusWire® unites several flex inserts with each other via just one wire and is simply integrated into the installation cable; no separate cable is necessary. In contrast to a standard extension, additional information can be exchanged between the inserts, thus offering even more functionality and convenience.

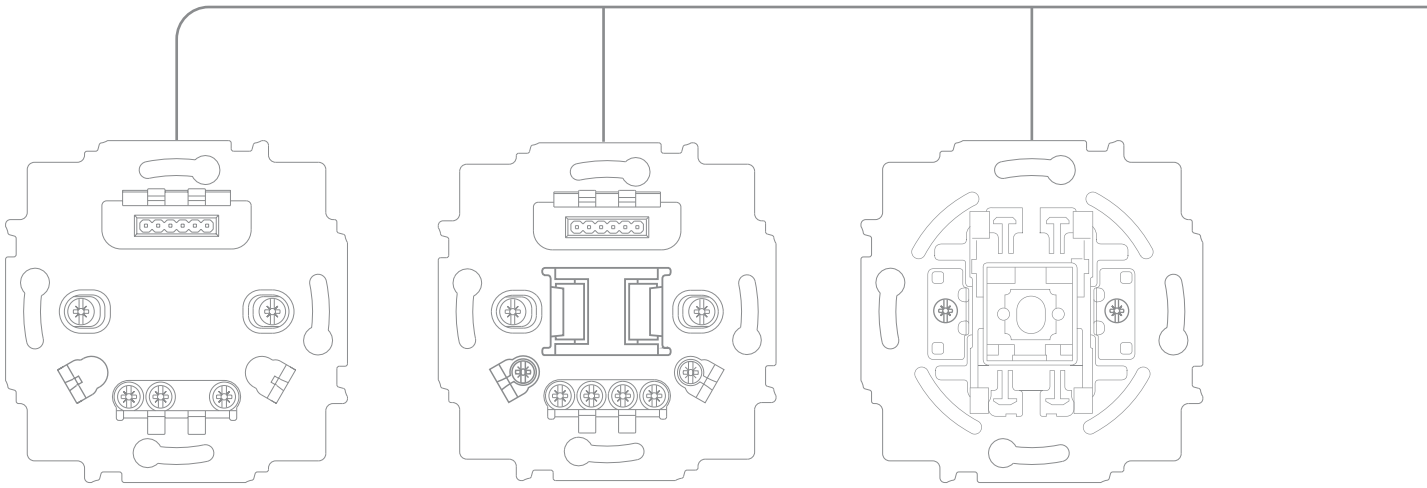

–
plusWire® not only enables information to be exchanged between the new inserts. Conventional push-buttons can also be used as an extension via the same wire. During installation, conventional push-buttons and flex inserts can even be combined with each other.

Information includes
- Short press: on
- Short press: off
- Short press: stop
- Long press: dim up/raise
- Long press: dim down/lower
- Brightness-independent switching
- Brightness-dependent switching
- Stay-on time expired

Central blind control
Intermediate solutions make the installation even more flexible. For instance, 'only' the central insert can be fitted with a flex wireless control element, enabling the entire group to be controlled remotely or operated via a timer.

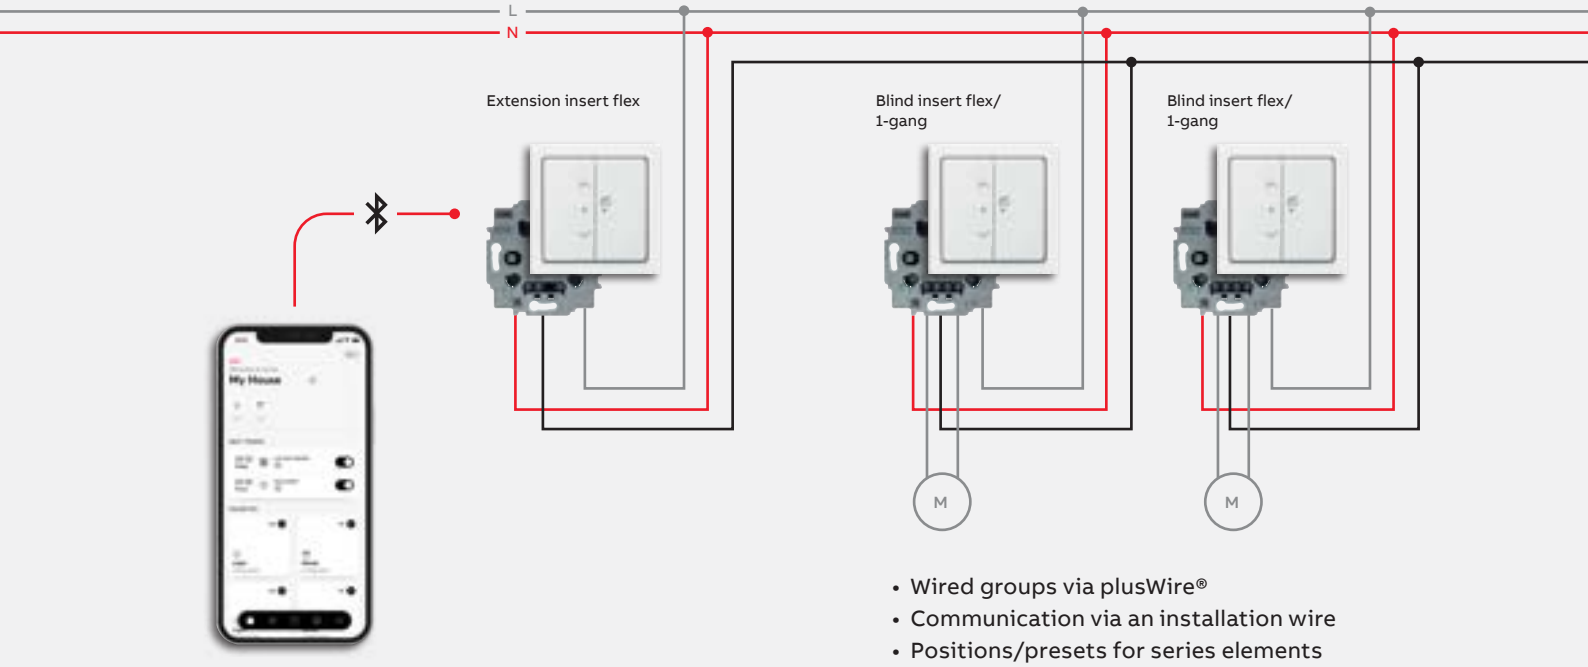

- Wired groups via plusWire®
- Communication via an installation wire
- Positions/presets for series elements
- Decentralised stored positions called from the series element of the central insert

Motion detectors
Several motion detectors can be combined in one hallway to extend coverage or for angled corridors. When using the Busch-Watchdog® 180 flex, comfort sensors also enable manual lighting control through the 'floating' rocker. Defined on/off switching is possible above or below the detection lens.

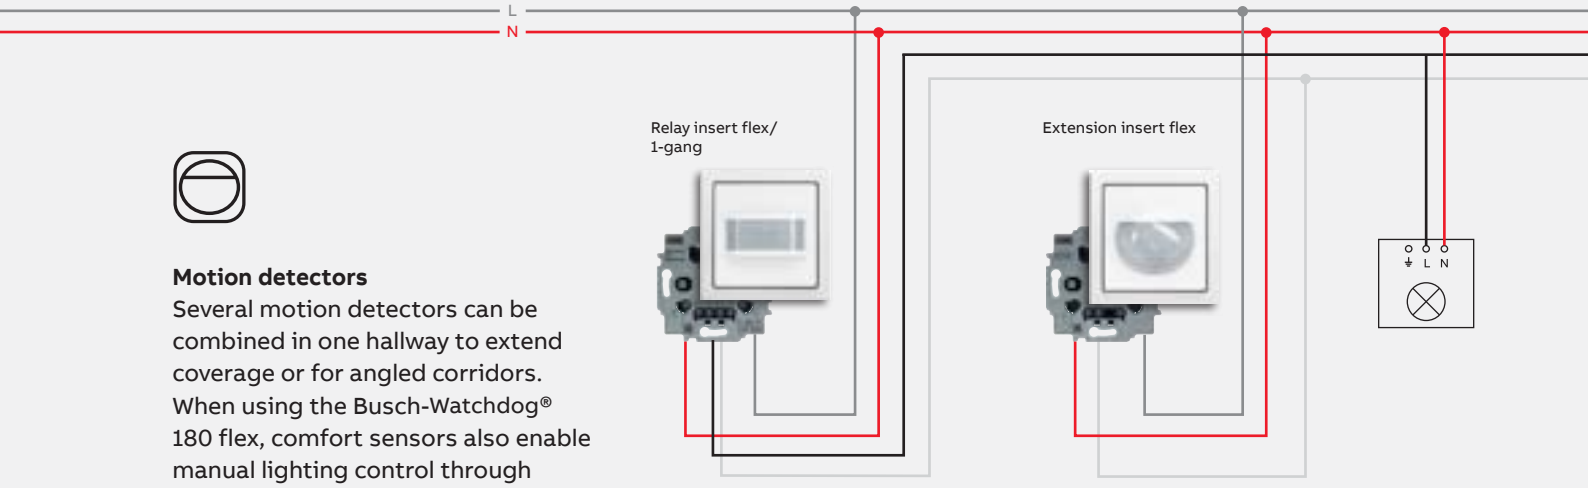

–
The comfort sensor with multi-lens is ideal for use in stairwells

Wireless

ABB-flexTronics® wireless

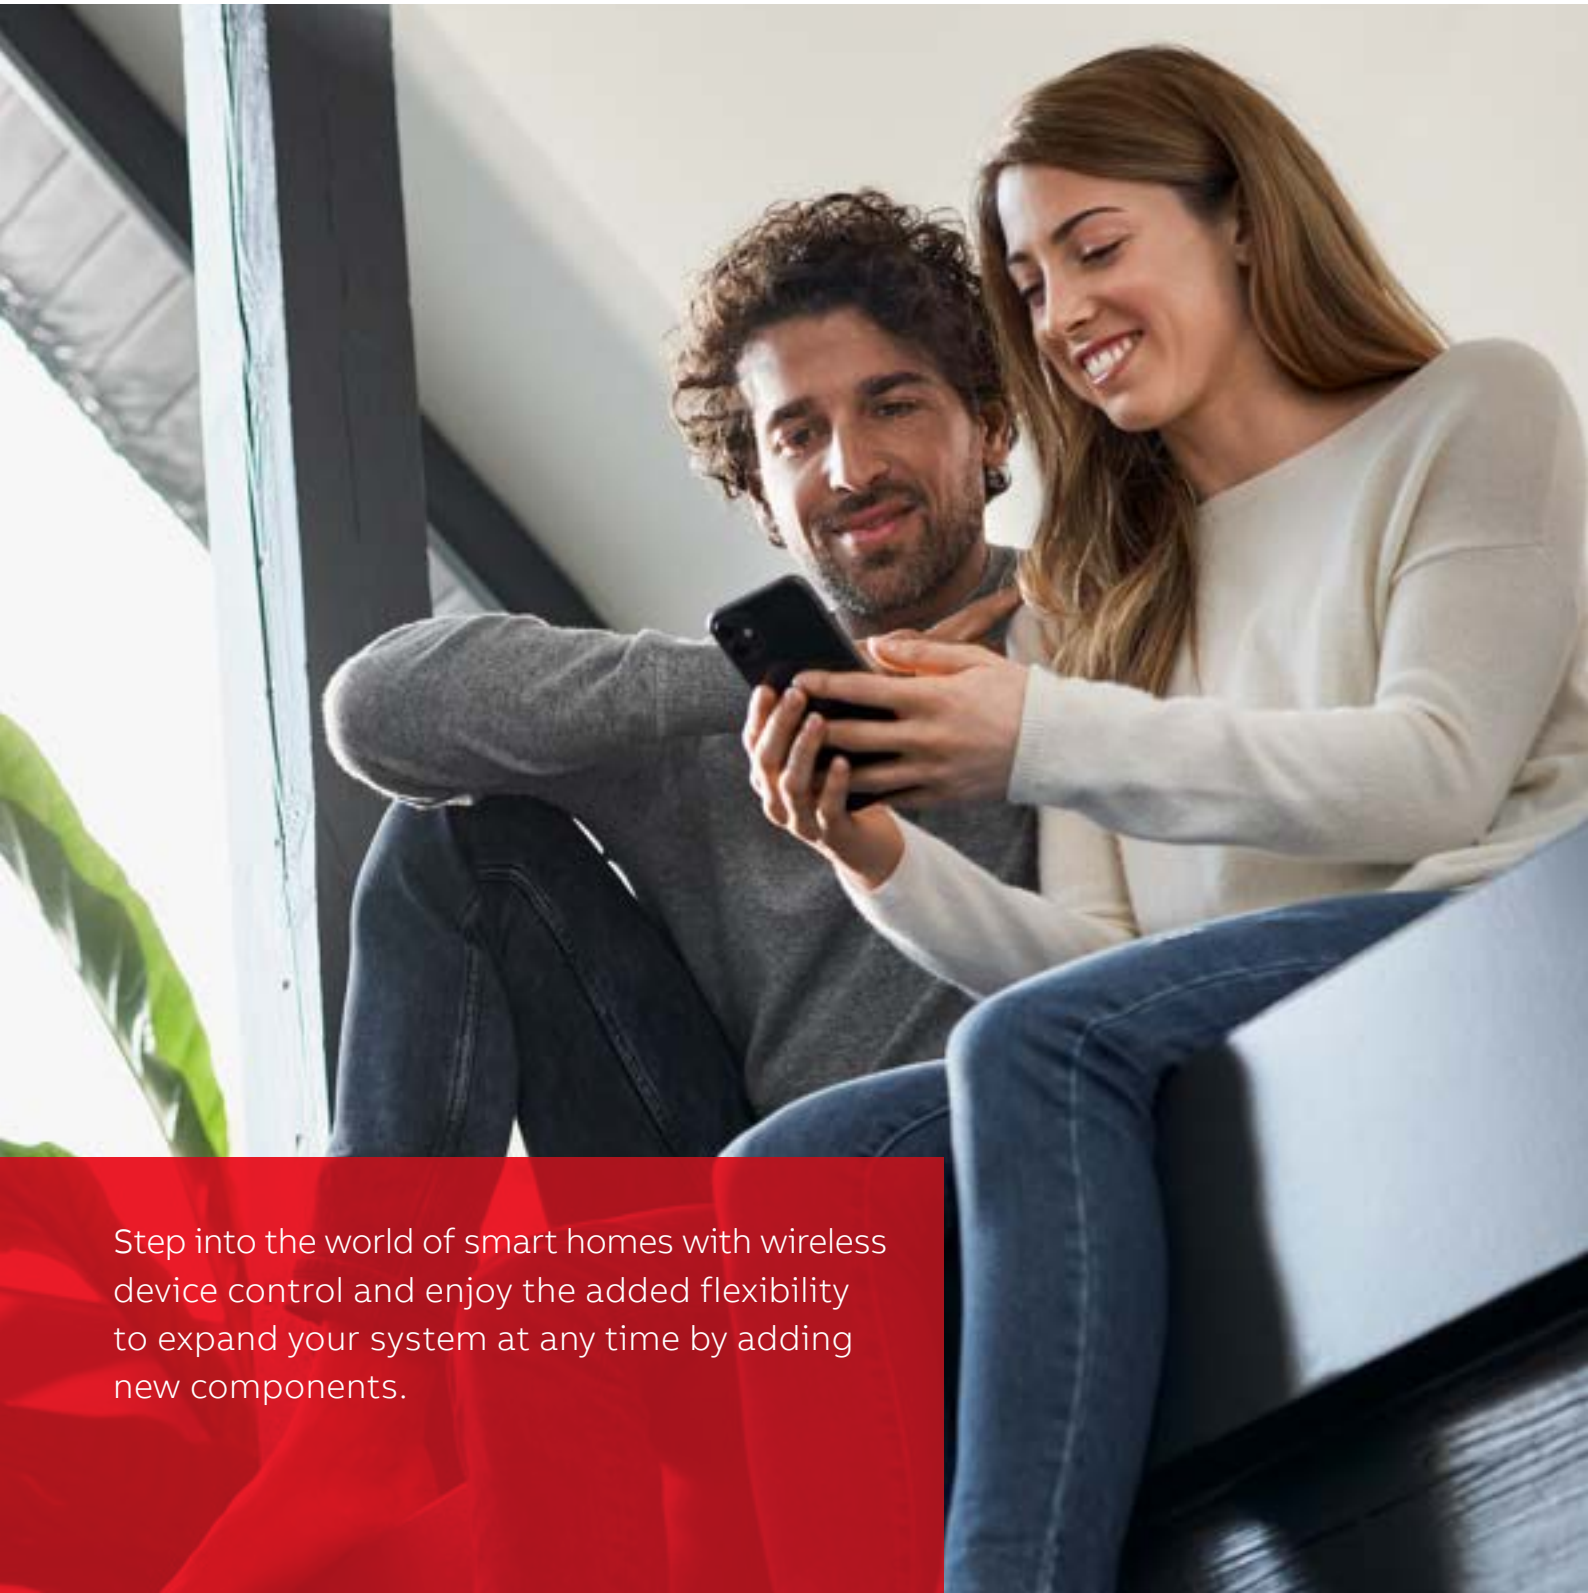

Step into the world of smart homes with wireless device control and enjoy the added flexibility to expand your system at any time by adding new components.

ABB-flexTronics® wireless
Device control

Start with ABB-flexTronics® wireless device control, or easily upgrade from ABB-flexTronics® single-operation device control by swapping out the control element. From there, you can manage devices via Bluetooth using the app, allowing for digital local remote control and configuration of multiple devices.

- **Stand-alone operation of inserts**
- **Device control via the app using Bluetooth enables the digital control of several inserts.**
- **Control and configuration of the corre-sponding insert via app using Bluetooth**
- **Several inserts can be compiled into one project in the app to simplify switching between devices**

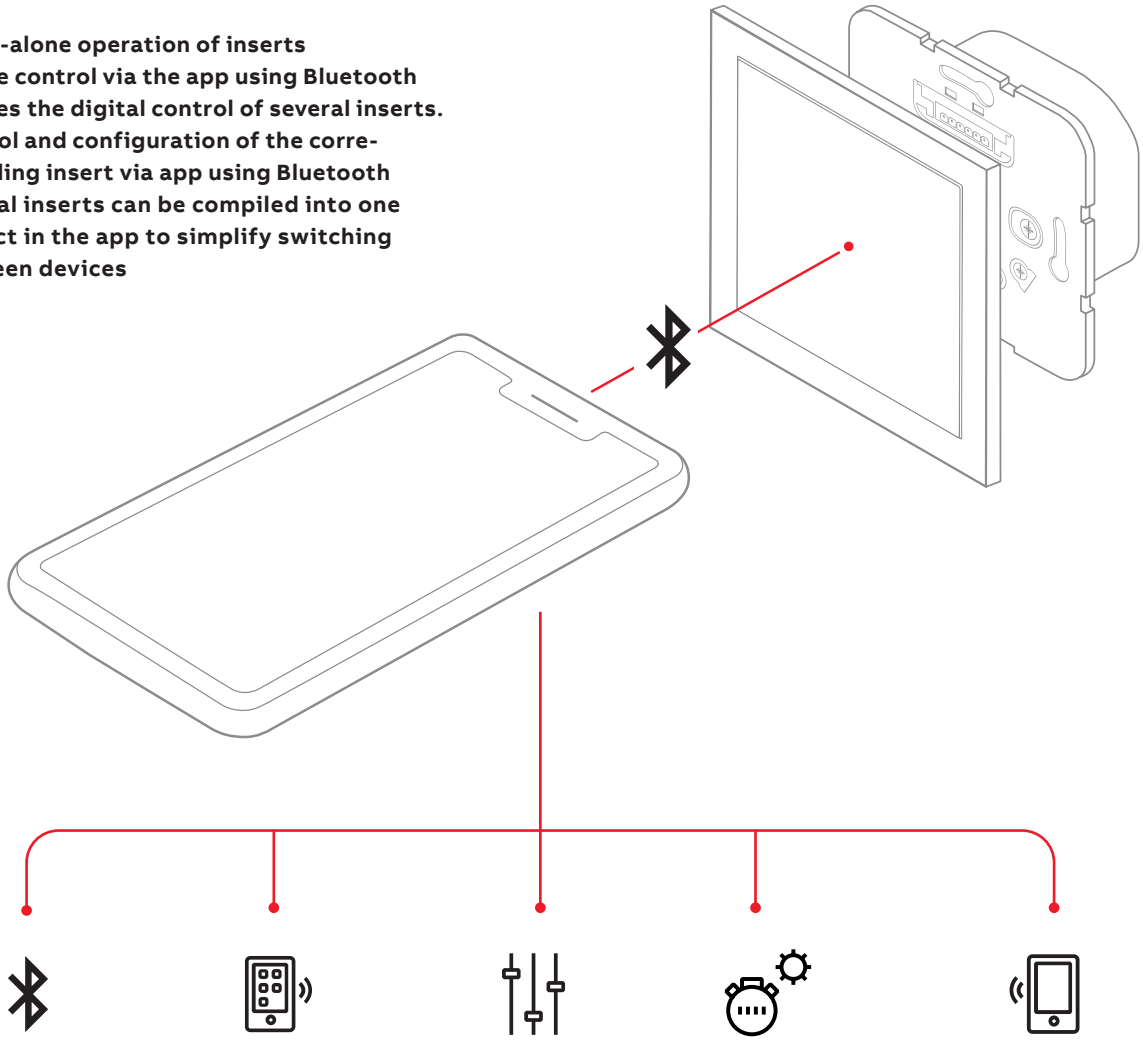

Bluetooth connectivity
Direct connection to smartphones

Commissioning via App
Thanks to the ABB-free@home® Next app

Extended range of parameters
In addition to standard device's features

Embedded timer
Integrated astro function/timer

Local control via App
Control the device via smartphone while at home

Wireless

ABB-flexTronics® wireless
Device control

As powerful as the sum of its parts. When combined, our modules demonstrate what device control can offer.

From light control through blind management, all the way to motion and presence detectors, all functions are easy to configure, operate and compile in one project in the ABB-free@home® Next app. All that is required is a Bluetooth connection.

Lighting control
- On/off
- Timer
- Dimmer values/presets
- Stay-on times
- Astro function

Blind control
- Up/down
- Timer
- Astro function
- Shading position
- Vacation function

Motion detector
- Timer
- Stay-on times
- Astro function
- Set switching thresholds
- Disable manual operation

Room temperature control
- Temperature setting
- Time schedule
- ECO mode
- Astro function
- Automatic heating and cooling

Blind control

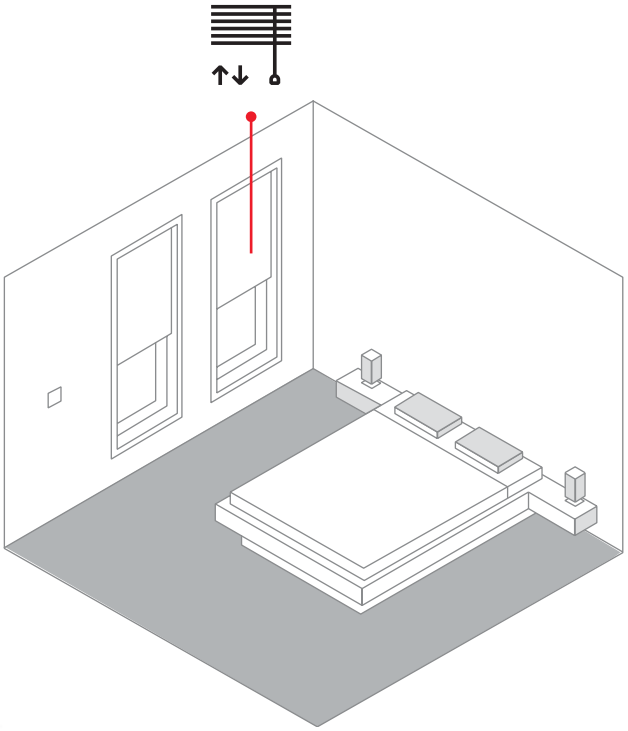

Practical and future-ready
All functions can be upgraded at any time simply by replacing the control element on the front. All inserts and elements are completely compatible.

To learn more about the wiring refer to page 14 plusWire®

Wireless

ABB-flexTronics® wireless
Device control

ABB-flexTronics® wireless offers a straightforward way to make your space smarter and more responsive to your needs.

Operate your system through traditional wall switches, the ABB-free@home® Next app (available for iOS and Android), or by grouping devices for collective control. Manage devices, set timers, and create automation rules, through the ABB-free@home® Next app.

Lighting Control

Switching and dimming
Control lights through switches or the app, with options for dimming, changing colors, or activating presets.

Timers and automation
Set schedules for lighting using an integrated timer or astro function, which adjusts based on sunrise and sunset times.

Blind Control

Automated shading
Control blinds through the app, with additional automation based on weather conditions or time of day. The astro function can adjust blinds according to daylight changes.

Weather integration
Blinds can be automatically adjusted in response to weather conditions when integrated with a weather station.

Lighting Control Applications

Garden lighting
Automate garden lights for both aesthetic and security purposes, with options for varied presets based on time, weather, or season.

Stair lighting
Energy-efficient lighting control for stairwells using motion sensors.

Children's room
Set up safe and soothing lighting scenarios, like dimming lights gradually for bedtime.

Bathroom lighting
Customizable lighting for different times of the day, synced with natural biorhythms using motion detectors and dimmers.

Temperature Control

Room Temperature Control
The room temperature controller offers versatile heating and cooling for fan-coils, underfloor heating, and conventional systems. With an energy-saving ECO mode, it ensures efficient comfort. Control settings locally or remotely via the app for easy temperature management.

Astro Function and Presets: Automate functions based on sunrise and sunset times, and use presets to quickly set the perfect atmosphere for any occasion, like a cozy movie night.

Everything off function: Create a preset scene where the networked devices in all rooms can be switched off at the same time. For example the lights in the entire house can be switched off at the touch of a single button.

ABB-flexTronics® wireless
Room control

Networking is the keyword of the future.

The advantages are obvious: the functionality of our intelligent room control can be flexibly scaled via radio and/or plusWire®. Several devices can be connected to each other. For convenience and comfort that is virtually invisible but can be felt every single day.

Future-ready room control
Blind management, light control and motion detectors are connected with each other and can be controlled individually or together.

ABB-flexTronics® wireless simplifies smart room management with Bluetooth technology, allowing seamless control of lights, blinds, and sensors. Easily configure your system using the ABB-free@home® Next app, which provides a flexible solution for modern spaces without the need for extensive wiring.

Ideal for homeowners and professionals, this system enables device control from your smartphone, enhancing comfort and energy efficiency by automating lighting and shading based on occupancy and time of day. Expandable and compatible with the ABB-free@home® system, it's a future-proof choice for comprehensive home automation.

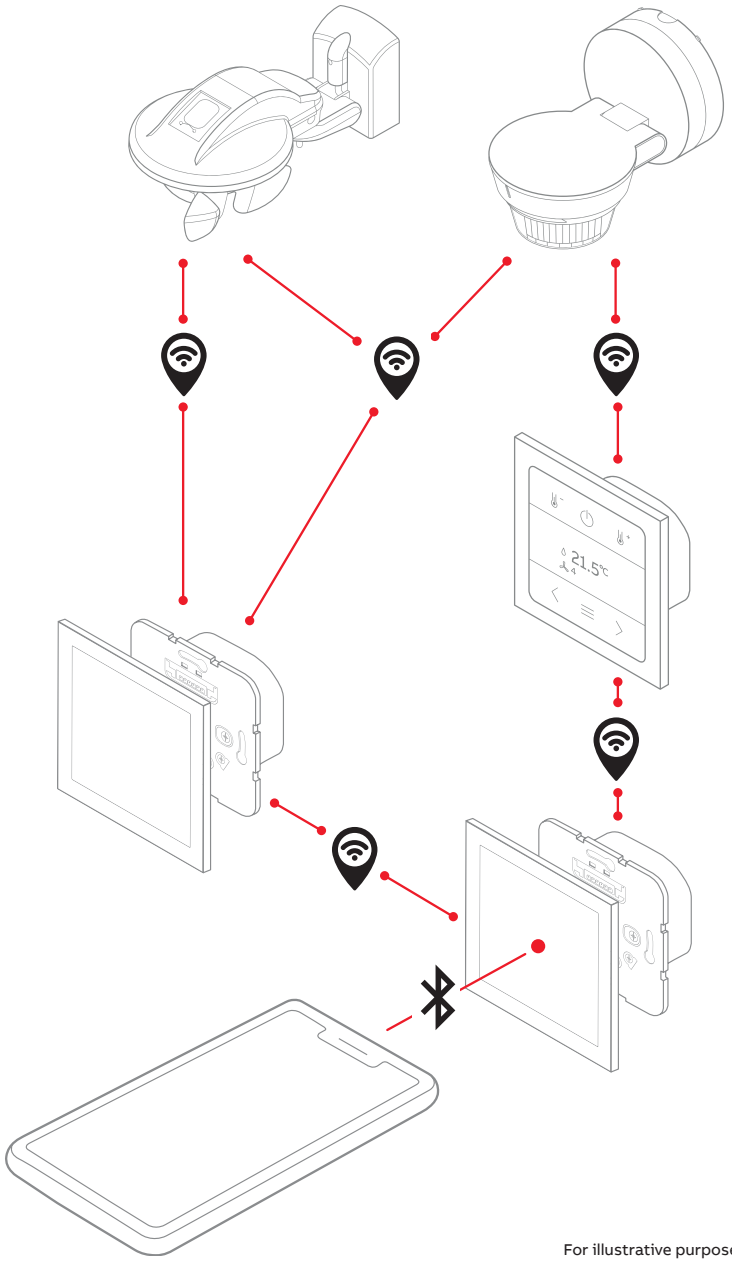

myABB registration and smartphone pairing is required.
All necessary device data is stored in the cloud.

For illustrative purposes only

Wireless

ABB-flexTronics® wireless
Room control

Wireless mesh network

The wireless system can be expanded to support up to 32 devices in a wireless mesh network, enhancing coverage and control capabilities across larger homes

Enhanced coverage

- **Extended range:** A mesh network allows devices to communicate with each other, relaying signals between them. This extends the coverage area beyond what a single router or device could achieve, making it ideal for large homes or properties.
- **Seamless connectivity:** Devices in different parts of the home can maintain stable connectivity without dead zones or weak signals.

Increased control capabilities

- **Centralized management:** Integrating devices like the ABB-flexTronics wireless, ABB-free@home wireless, Watchdog PRO, weather stations, and window contacts allows for unified control. This enables centralized automation and monitoring from a single system or interface.
- **Comprehensive automation:** With a variety of devices in the network, users can automate more complex tasks. For example, a weather station can adjust window contacts or a thermostat based on weather data, enhancing smart home automation.

Scalability

- **Flexibility:** As new wireless devices are added (up to 32), users can continue expanding their home automation system without major infrastructure changes.
- **Future-proofing:** The ability to integrate various device types ensures the system is adaptable to future needs and technology advancements.

Improved reliability

- **Redundancy:** In a mesh network, if one device fails or experiences weak signal, other devices can route traffic through alternative paths, ensuring consistent performance.
- **Efficient communication:** Devices communicate efficiently, balancing network load, which can result in smoother performance, especially for larger setups with multiple smart home devices.

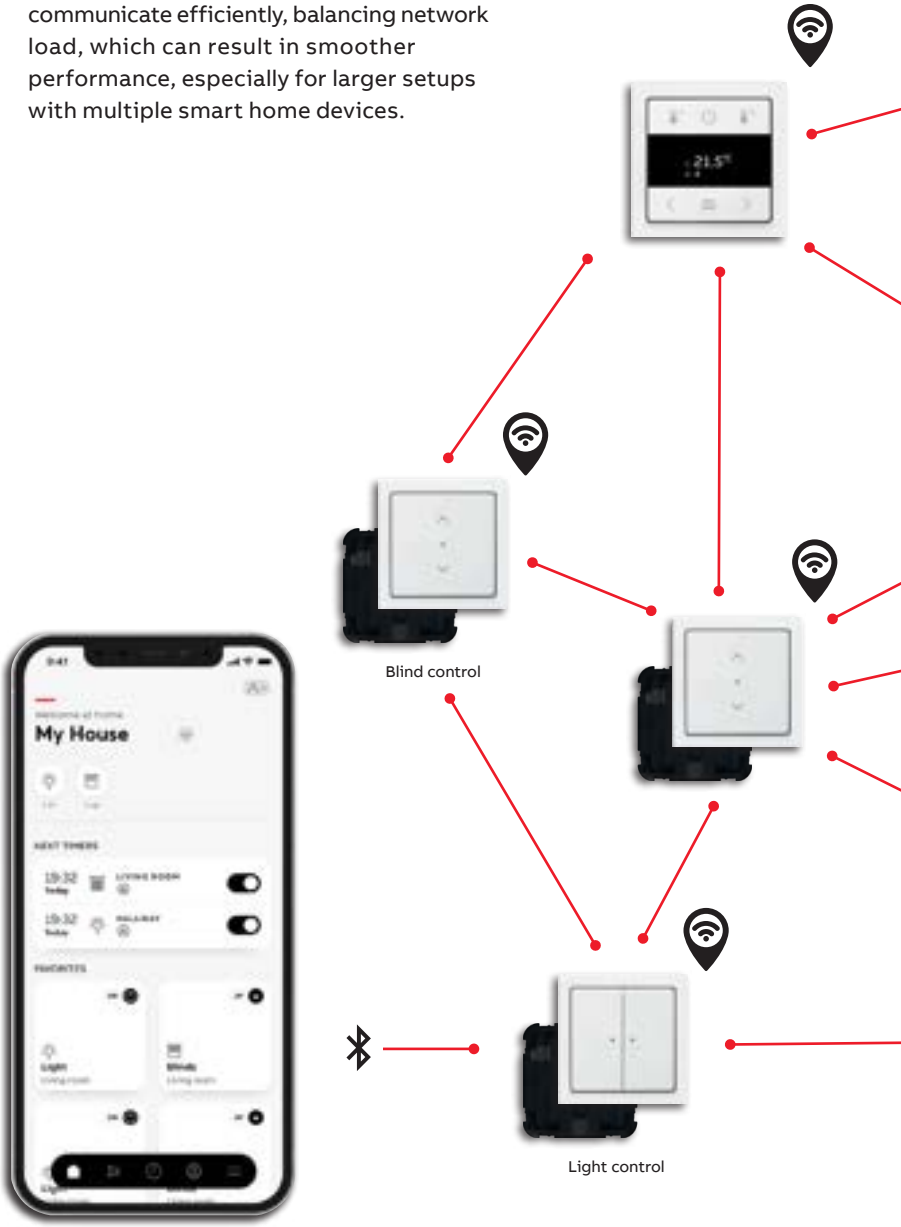

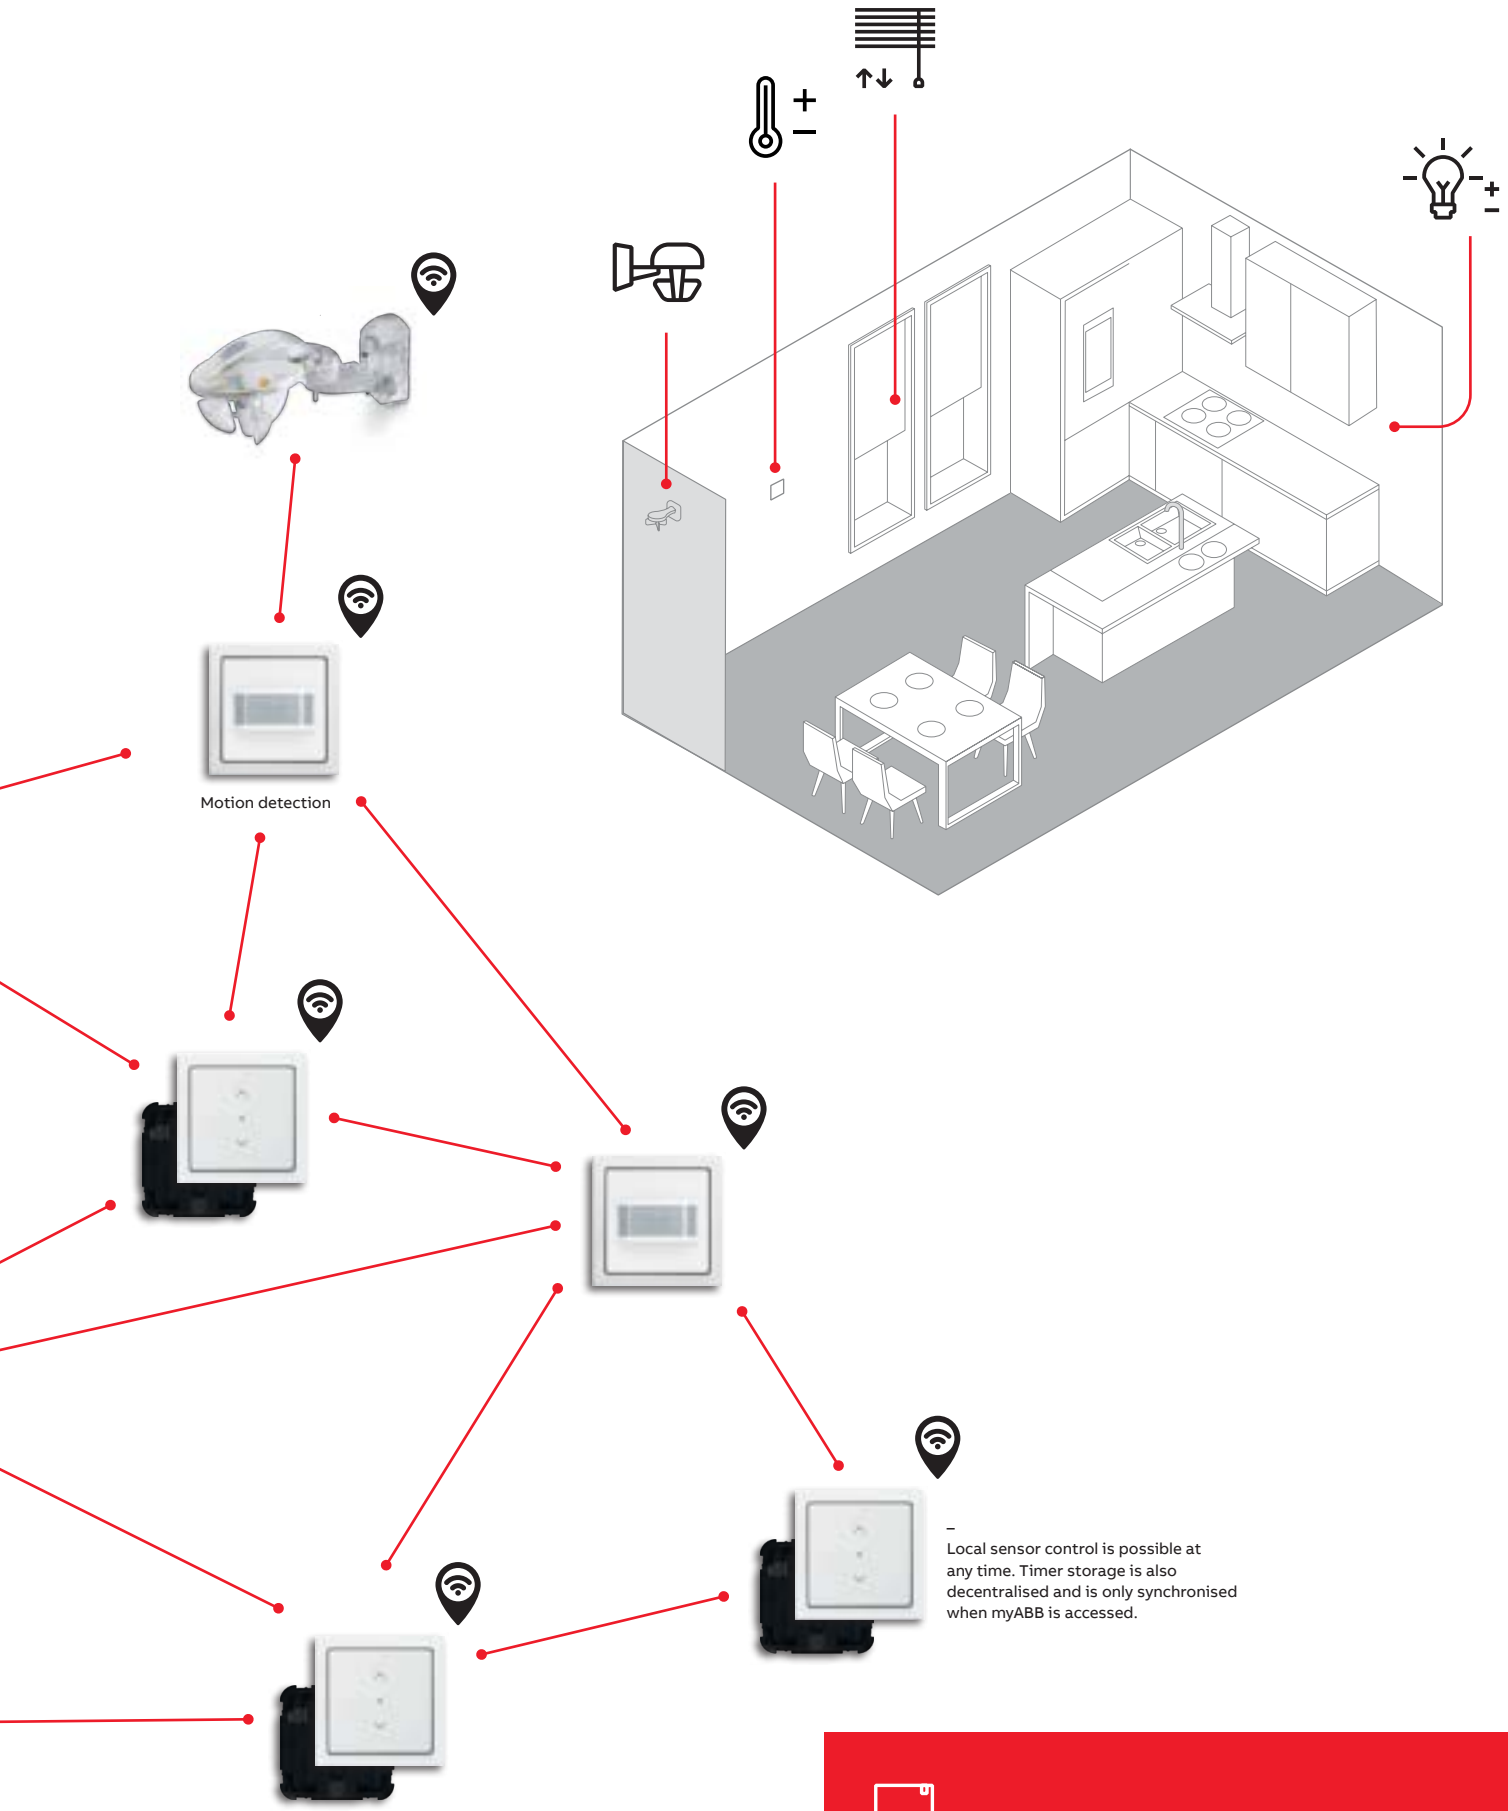

–
Local sensor control is possible at any time. Timer storage is also decentralised and is only synchronised when myABB is accessed.

Intelligent room control can be extended to the entire home with the addition of an ABB-free@home System Access Point.

ABB-flexTronics®
Product range overview

ABB-flexTronics® control elements

Tapping control element, 1gang
64711-500

Tapping control element, 2gang
64721-500

Freely configurable multifunction keypad
KK/U4.xx.1

Presence Detector Universal flexTronics®
64753-xxx-500

Presence Detector Sky flexTronics®
64754-xxx-500

Presence Detector Corridor-Sensor flexTronics®
64755-xxx-500

Comfort switch
64765-xxx-500

Busch-Watchdog 180 flex Basic sensor
64761-xxx-500

Busch-Watchdog 180 flex Comfort sensor
64762-xxx-500

Busch-Watchdog 180 flex Multi sensor
64764-xxx-500

ABB-flexTronics® inserts

Relay insert flex, 1gang
64811 U-500

Relay insert flex, 2gang
64821 U-500

Dimmer insert push button 1gang
64851 U-500

Electronic insert
64814 U-500

Blind insert 2 rocker 1gang
64831 U-500

Extension insert flex
64891 U-500

ABB-flexTronics® wireless
Product range overview

ABB-flexTronics® wireless control elements

Control element wireless single push button
62711-WL-500

Control element wireless two-part button
62721-WL-500

Watchdog 180 flex multi sens. wireless
62764-xxx-WL-500

Watchdog 180 flex comf. sens. wireless
62762-xxx-WL-500

Compatible wireless devices

Smart-switch insert, SF, WL
62721 U-WL-500

Smart-switch insert, BSI, WL
62721/01 U-WL-500

Busch-Watchdog PRO 280°
6251/28-13x-wl-500

Switch Actuator 1gang,
FM, WL
62811 U-WL-500

Switch Actuator 2gang,
WL, 230V
62821 U-WL-500

Weather Station Wireless
WS-1-WL.1

Dimming Actuator 1gang,
FM, WL
62851 U-WL-500

Blind Actuator 1gang,
FM, WL
62831 U-WL-500

Binary Input 6gang,
WL, 230V
62870/6.0 U-WL-500

Room temperature controller
with integrated actuator output
62841 U-WL-500

Sensor Unit with integrated RTC
62842 U-WL-500

Room temperature controller
with integrated actuator output
62843 U-WL-500

ABB-flexTronics® inserts

Relay insert flex, 1gang
64811 U-500

Relay insert flex, 2gang
64821 U-500

Dimmer insert push button
1gang
64851 U-500

Electronic insert
64814 U-500

Blind insert 2 rocker
1gang
64831 U-500

Extension insert flex
64891 U-500

Wireless solution
For quick and easy installation

The energy harvesting Smart Switch and the wireless flush-mounted actuators are ideal for renovations and new builds.

Flush-mounted actuators
The flush-mounted actuators for switching, dimming or controlling blinds can be easily installed in a deep installation box. They can be controlled by the Smart Switch or any other ABB wireless control element or by conventional push buttons directly connected to the extension input.

Program with the ABB-free@home® Next app
The programming and operation of the wireless actuators and the Smart Switch is carried out via the ABB-free@home® Next app. Here, the devices can be linked as desired and assigned to functions. The smartphone is connected with the devices via via Bluetooth or NFC (BT pills and NFC Smart Switch).

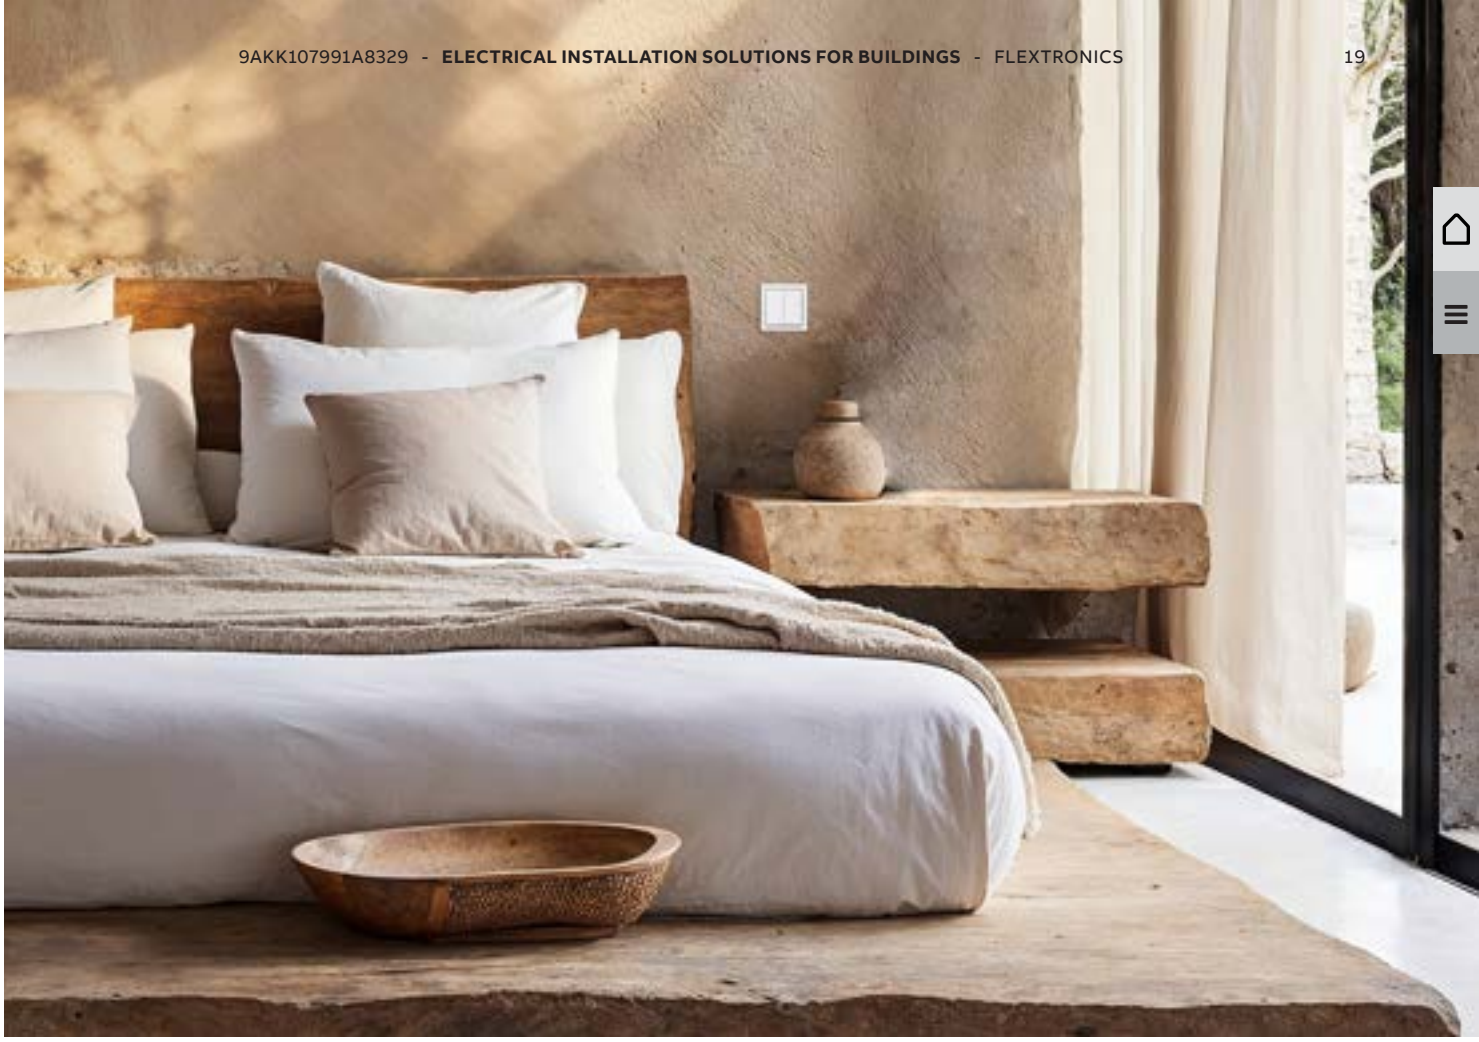

ABB-free@home® wireless actuators and Smart Switch

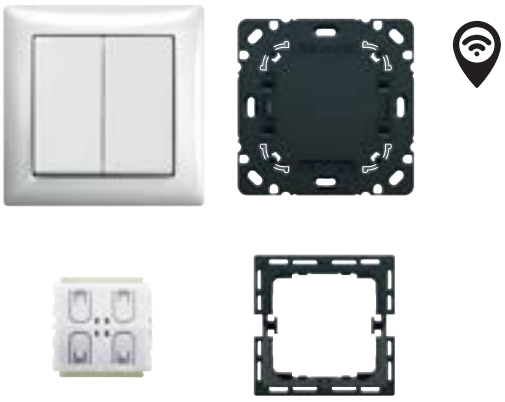

Smart Switch
Balance/Art linear
62721/01 U-WL-500

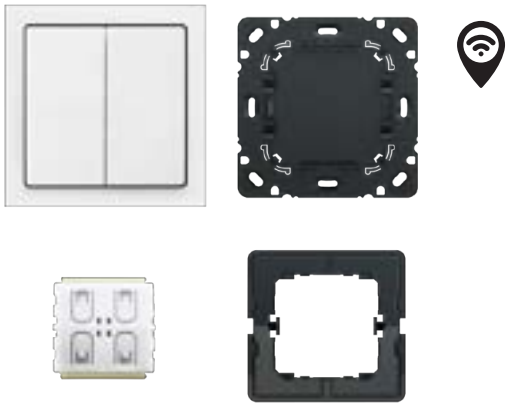

Smart Switch
Future/Solo
62721 U-WL-500

Switch Actuator 1gang, FM, WL
62811 U-WL-500

Switch Actuator 2gang, WL, 230V
62821 U-WL-500

Dimming Actuator 1gang, FM, WL
62851 U-WL-500



Blind Actuator 1gang, FM, WL
62831 U-WL-500

Binary Input 6gang, WL, 230V
62870/6.0 U-WL-500



The buttons of the Smart Switch wireless can be assigned up to four functions. These can be scenes, individual actuators or any other function in ABB-free@home®. Long and short button presses for switching, dimming and blinds are therefore easy to implement.

ABB Smart Switch

Wireless and smart
Smart switch for wireless control of any ABB-free@home® function. The transmitter generates the required energy when actuated (energy harvesting) and therefore can be placed anywhere

Transmitting energy is generated when switching (Energy Harvesting)

Wireless flush mounted actuators

The wireless actuators can be used in device and room control, but also in combination with an extended system to control the entire home. It can also be controlled via the app using Bluetooth.

Parameters
Simple configuration via smartphone app

Timer
Integrated astro function/timer

Device control via Bluetooth interface
Direct connection to smartphone

Room control via remote control
Via the ABB-free@home® Next app and myABB account

Complete home control via ABB-free@home® wireless
For connection to a free@home System Access Point

Device control

Standalone operation of actuactors. Local control and configuration of the corresponding insert via app using Bluetooth. Several actuactors can be compiled into one project in the app in order to simplify switching between devices

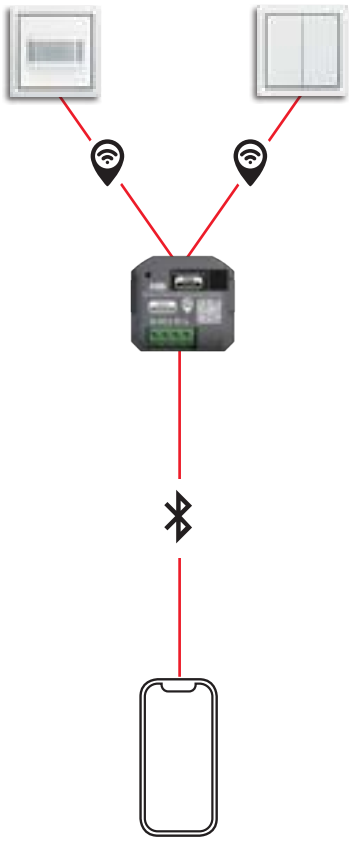

Room control

Networking of 32 devices via the ABB-free@home® wireless protocol. No System Access Point required. For wireless connection, myBuildings portal registration is required

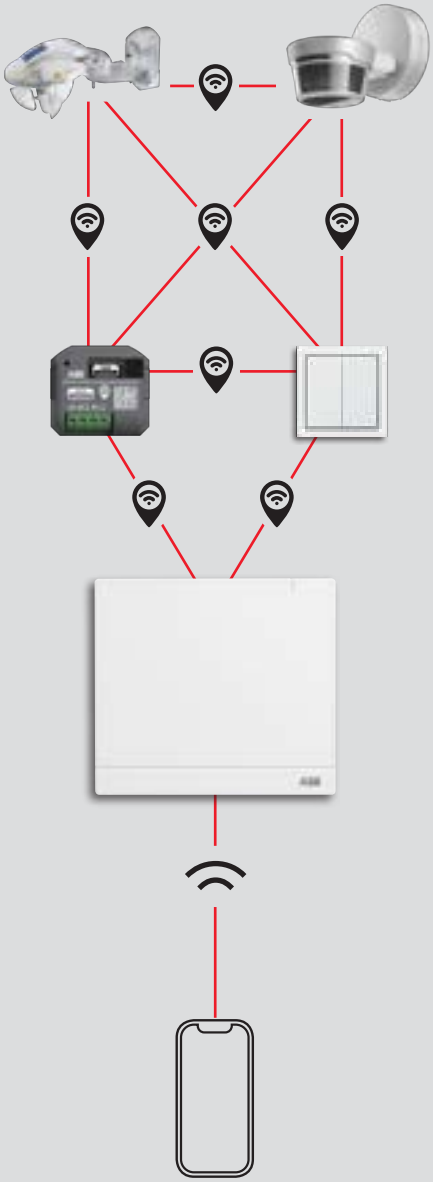

Home control

Networking of devices via ABB-free@home® wireless protocol to the ABB-free@home® System Access Point. Full networkability with complete functionality such as voice control, external access, and much more, also in combination with wired devices.

ABB-flexTronics®

Installation

—
01

—
02

—
03

—
04

—
05

—
01 Insert
—
02 Control element
—
03 Rocker
—
04 Cover frame
—
05 Sensor unit

ABB-flexTronics®
Inserts

Relay insert flex, 1gang [1)]
3 wire connection (neutral conductor required). 3 wire connection (neutral conductor required). For switching lighting systems. Operation in 1gang 2way installations via push switch unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Comfort switch flex control element 64765-...-500 .
For Busch-Watchdog 180 flex sensors 6476x-...-500.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL-500.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~. Rated frequency: 50 Hz
Inputs: 1. Outputs: 1x Normally open contact, potential bound.
Suitable for: 230 V- LEDi, typical, rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via transformers,rated power: 2300 VA.
Temperature range (Device): -25 °C to 55 °C. Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

	Order details		Pack unit
	Type code	Order code	pc.
Relay insert flex, 1gang	64811 U-500	2CKA006800A3042	1

Relay insert flex, 2gang [1)]
3 wire connection (neutral conductor required). For switching lighting systems.
For switching two independent load circuits. For controlling light and ventilation systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units. Operation also possible via conventional push buttons (2020 US, 2021/6 UK). Without control cover. For control element flex, 1gang, wireless, 62711-WL. For control element flex, 2gang, wireless, 62721-WL. For Busch-Comfort switch flex control element 64765-... . For Busch-Watchdog 180 flex sensors 6476x-... . For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL. Combinable with extension insert, 64891 U. Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz. Inputs: 2. Outputs: 2x Normally open contact, potential-bound. Suitable for: 230 V- LEDi, typical. Rated power: 300 VA. Suitable for: 230 V incandescent lamps/230 V halogen lamps. Rated power: 1840 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 1150 VA
Temperature range (Device): -25 °C to 55 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm



[1)] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

	Order details		Pack unit
	Type code	Order code	pc.
Relay insert flex, 1gang	64821 U-500	2CKA006800A3045	1

ABB-flexTronics®

Inserts

Blind insert, 1 gang, 2 way flex
3 wire connection (neutral conductor required).
For the control of roller shutters, blind and awning motors with mechanical or electronic limit switch shut-off.
Group formation via extension input possible.
Operation also via conventional push buttons (2020 US non-illuminated/2021/6 UK) possible.
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.

	Order details		Pack unit
	Type code	Order code	pc.
Blind insert flex, 1gang	64831 U-500	2CKA006400A0096	1

ABB-flexTronics®
Inserts

LED dimmer insert flex, 1gang 1) 2) 3) 4) 5) 6) FM, LED, 3-240 VA
2-wire connection (neutral conductor not required).
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
Touch dimmer for switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Optimised for dimming of retrofit LED lamps (LEDi). For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
With light-level memory and minimum brightness memory.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.
Without control cover.
For control element flex, 1gang, 64711.
For control element flex, 2gang, 64721.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Rated power: 3-240 VA (LEDi).
Rated voltage: 230 V~, +10 % / -10 %.
Rated frequency: 50 Hz. Inputs: 1.
Outputs: 1x dimming channel.
Suitable for: 230 V LEDi, typical (leading edge control).
Rated power: 3 - 100 VA.
Suitable for: 230 V LEDi, typical (trailing edge control).
Rated power: 3 - 240 W.
Suitable for: 230 V incandescent lamps, 230 V halogen lamps and low-voltage halogen lamps with conventional transformers or Busch Electronic Transformer.
Rated power: 10 - 240 VA.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm.
Mounting depth: 25 mmIEC 60669-2-1, British Standard EN 60669-2-1



[1] In the case of conventional transformers, take ~20% transformer loss into account.
[2] In case of electronic transformers, 5 % transformer losses.
[3] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)
[4] Recommendation: Please use loads and types of one producer.
[5] The dimmer interface is not standardised, it is the responsibility of the lamp manufacturers to list compatible products in their manufacturing information. Different installation situations can lead to different results. To clear up the problem, for example, it is recommended to carry out a local test of the selected lamps and dimmers. Please consult the lamp manufacturer for the LED dimmer recommended.
[6] A liability on the part of Buscah-Jaeger for the compatibility of the allocated lamps and dimmers is therefore excluded.

	Order details		Pack unit
	Type code	Order code	pc.
LED dimmer insert flex, 1gang	64851 U-500	2CKA006500A0013	1

ABB-flexTronics®

Inserts

e-contact insert flex, 1gang 1) 2)
2-wire connection (neutral conductor not required)
Neutral conductor optionally connectable (recommended for the connection of low loads < 10 W/VA).
For switching lighting systems.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Operation also possible via conventional push buttons (2020 US, 2021/6 UK).
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with extension insert, 64891 U.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical.
Rated power: 3 - 240 VA
Suitable for: 230 V incandescent lamps/230 V halogen lamps
Rated power: 10 - 240 W
Suitable for: Low voltage halogen lamps that are operated via transformers.
Rated power: 3 - 240 VA
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

[1] Use only dimmable high-voltage LEDs.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

	Order details		Pack unit
	Type code	Order code	pc.
e-contact insert flex 1gang	64814 U-500	2CKA006800A3048	1

ABB-flexTronics®

Inserts

Extension insert flex 1)
3 wire connection (neutral conductor required).
For the extension of the Busch-Comfort switch or presence detector installations.
For group control of flex inserts via extension unit communication.
Operation in 1gang 2way installations via push switch-unit for combination with flush-mounted units.
Without control cover.
For control element flex, 1gang, wireless, 62711-WL.
For control element flex, 2gang, wireless, 62721-WL.
For Busch-Watchdog 180 flex sensors 6476x-... .
For Busch-Watchdog 180 flex sensors, wireless, 6276x-...-WL.
Combinable with all flex inserts.
Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz
Control/Signal outputs: 1, electronic output, potential-bound
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm
Mounting depth: 25 mm

[1] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

	Order details		Pack unit
	Type code	Order code	pc.
Extension insert flex	64891 U-500	2CKA006800A3051	

ABB-flexTronics®
Control elements

Control element, 1 gang flex
Tapping control element, 1gang.
Compatible with all ABB-flexTronics® flex inserts.
For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx.
For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Order details		Price 1 piece	Weight 1 piece	Pack unit
Type code	**Order code**		**kg**	**pc.**
64711-500	2CKA006400A0099			1

Flex control element, 2 gang flex
Tapping control element, 2gang.
For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx.
For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U.
For series relay insert flex, 2gang, 64821 U.
For e-contact insert flex, 1gang, 64814 U.
For LED touch dimmer insert flex, 1gang, 64851 U.
For extension insert flex, 64891 U.
For blind insert flex, 1gang, 64831 U.

Order details		Price 1 piece	Weight 1 piece	Pack unit
Type code	**Order code**		**kg**	**pc.**
64721-500	2CKA006400A0101			1

ABB-flexTronics® wireless

Control elements wireless

Control element flex,1gang,WL

For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all ABB-flexTronics® inserts. Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-flexTronics® Next app or via the web interface of the System Access Point. Timer with Astro function. For 1gang rocker 6230-10x-xxx, 6231-10x-xxx, 6232-10x-xxx, 6233-10x-xxx and 6234-10x-xxx. For relay insert flex, 1gang, 64811 U-500. For series relay insert flex, 2gang, 64821 U-500. For e-contact insert flex, 1gang, 64814 U-500. For LED touch dimmer insert flex, 1gang, 64851 U-500. For extension insert flex, 64891 U-500. For blind insert flex, 1gang, 64831 U-500.

Order details		Price 1 piece	Weight 1 piece	Pack unit
Type code	Order code		kg	pc.
WIRELESS				
62711-WL-500	2CKA006200A0281			1

Control element flex, 2gang,WL

For the manual and automatic control of roller blinds, blinds, awnings, lighting and electric loads. Compatible with all ABB-flexTronics® inserts. Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® Next app or via the web interface of the System Access Point. Timer with Astro function. For 2gang rocker 6230-2x-xxx, 6231-2x-xxx, 6232-2x-xxx, 6233-2x-xxx and 6234-2x-xxx. For saving and calling up 2 scenes via the right rocker. For relay insert flex, 1gang, 64811 U-500. For series relay insert flex, 2gang, 64821 U-500. For e-contact insert flex, 1gang, 64814 U-500. For LED touch dimmer insert flex, 1gang, 64851 U-500. For extension insert flex, 64891 U-500. For blind insert flex, 1gang, 64831 U-500.

Order details		Price 1 piece	Weight 1 piece	Pack unit
Type code	Order code		kg	pc.
WIRELESS				
62721-WL-500	2CKA006200A0283			1

ABB-flexTronics® wireless

Sets wireless

Blind flex, Set, WL

Blind insert with tapping control element, 2gang, wireless. For the manual and automatic control of roller blinds, blinds, awnings. Timer with Astro function. For saving and calling up scenes and groups via the right rocker. Remote operation via the Bluetooth and smartphone/tablet app.
Consisting of flex blind insert, 64831 U-500.
Consisting of control element flex, 2gang, wireless, 62721-WL-500
Consisting of rocker, 2gang left with >Blind< icon 6232-20-84-500
Consisting of rockers, 2gang right with >Scene< icon 6233-22-84-500
Cover frame design future® linear 1721-184K.
Control element: Switch contacts top/bottom
Display elements: LED (switch-off function / brightness adjustable) for status display.
Rated voltage: 230 V~, +10 % / -10 %. Rated frequency: 50 Hz
Temperature range (device): -5 °C - 45 °C. Storage temperature range: -20 °C - 70 °C
Dimensions: (L x W x D): 71 mm x 71 mm x 30 mm. Mounting depth: 25 mm
Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
future® linear	62731/UJ-84-WL-500	2CKA006200A0285	yes		1

LED dimmer flex, Set, WL

For manual and automatic switching and dimming of lamps. For saving and calling up scenes and groups via the right rocker. Remote operation via the Bluetooth and smartphone/tablet app. Optimised for dimming of retrofit LED lamps (LEDi). Consisting of Flex touch dimmer insert, 64851 U-500. Consisting of control element flex, 2gang, wireless, 62721-WL-500. Consisting of rocker, 2gang left with >Dimmer< icon 6234-21-84-500. Consisting of rockers, 2gang right with >Scene< icon 6233-22-84-500. Consisting of future® linear cover frames, 1gang 1721-184K.
Control element:
Switch contacts top/bottom Display elements: LED (switch-off function / brightness adjustable) for status display. Rated voltage: 230 V~, +10 % / -10 %
Rated frequency: 50 Hz. Outputs: 1 dimming channel. Suitable for: 230 V LEDi, typical (leading edge control). Rated output: 3 - 100 VA.
Suitable for: 230 V LEDi, typical (trailing edge control). Rated output: 3 - 240 W. Temperature range (device): -5 °C - 45 °C. Storage temperature range: -20 °C - 70 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 45 mm. Mounting depth: 25 mm
In the case of conventional transformers, take ~20% transformer loss into account.
In case of electronic transformers, 5 % transformer losses. Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete). RAL colour number: Similar 9016
Recommendation: Please use loads and types of one producer.

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
future® linear	62851 UJ-84-WL-500	2CKA006200A0295	yes		1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
1gang, without printing
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6230-10-44G**	2CKA006220A0924			10
studio white, matt [1])	**6230-10-44M**	2CKA006220A0925			10
black matt [1])	**6230-10-45M**	2CKA006220A0927			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SR-1-81	2CKA006220A0137			1
82 ivory white	SR-1-82	2CKA006220A0516			1
84 studio white	SR-1-84	2CKA006220A0139			1
840 antique brass	SR-1-840	2CKA006220A0371			1
866 stainless steel	SR-1-866	2CKA006220A0533			1
884 studiowhite matt	SR-1-884	2CKA006220A0601			1
885 black matt	SR-1-885	2CKA006220A0618			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SR-1-92	2CKA006220A0635			1
93 champagne	SR-1-93	2CKA006220A0652			1
94 alpine white	SR-1-94	2CKA006220A0669			1
95 chateau-black	SR-1-95	2CKA006220A0686			1
96 chalet white	SR-1-96	2CKA006220A0703			1

impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
white	SR-1-84	2TKA00002776			1
ant hra.cite	SR-1-81	2TKA00002774			1
aluminium	SR-1-83	2TKA00002775			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
1gang, with “Light” icon
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6231-10-44G**	2CKA006220A0928			10
studio white, matt [1])	**6231-10-44M**	2CKA006220A0929			10
black matt [1])	**6231-10-45M**	2CKA006220A0931			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SRL-1-81	2CKA006220A0140			1
82 ivory white	SRL-1-82	2CKA006220A0517			1
84 studio white	SRL-1-84	2CKA006220A0142			1
840 antique brass	SRL-1-840	2CKA006220A0372			1
866 stainless steel	SRL-1-866	2CKA006220A0534			1
884 studio white matt	SRL-1-884	2CKA006220A0602			1
885 black matt	SRL-1-885	2CKA006220A0619			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SRL-1-92	2CKA006220A0636			1
94 alpine white	SRL-1-94	2CKA006220A0670			1
95 chateau-black	SRL-1-95	2CKA006220A0687			1
96 chalet white	SRL-1-96	2CKA006220A0704			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
1gang, with “Blind” icon
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6232-10-44G**	2CKA006220A0936			10
studio white, matt [1])	**6232-10-44M**	2CKA006220A0937			10
black matt [1])	**6232-10-45M**	2CKA006220A0939			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 antracite	SRB-1-81	2CKA006220A0143			1
82 ivory white	SRB-1-82	2CKA006220A0518			1
84 studio white	SRB-1-84	2CKA006220A0145			1
840 antique brass	SRB-1-840	2CKA006220A0373			1
866 stainless steel	SRB-1-866	2CKA006220A0535			1
884 studio white matt	SRB-1-884	2CKA006220A0603			1
885 black matt	SRB-1-885	2CKA006220A0620			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SRB-1-92	2CKA006220A0637			1
94 alpine white	SRB-1-94	2CKA006220A0671			1
95 chateau-black	SRB-1-95	2CKA006220A0688			1
96 chalet white	SRB-1-96	2CKA006220A0705			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
1gang, with “Scene” icon
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6233-10-44G**	2CKA006220A0940			10
studio white, matt [1])	**6233-10-44M**	2CKA006220A0941			10
black matt [1])	**6233-10-45M**	2CKA006220A0943			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SRS-1-81	2CKA006220A0146			1
82 ivory white	SRS-1-82	2CKA006220A0519			1
84 studio white	SRS-1-84	2CKA006220A0148			1
840 antique brass	SRS-1-840	2CKA006220A0374			1
866 stainless steel	SRS-1-866	2CKA006220A0536			1
884 studio white matt	SRS-1-884	2CKA006220A0604			1
885 black matt	SRS-1-885	2CKA006220A0621			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SRS-1-92	2CKA006220A0638			1
94 alpine white	SRS-1-94	2CKA006220A0672			1
95 chateau-black	SRS-1-95	2CKA006220A0689			1
96 chalet white	SRS-1-96	2CKA006220A0706			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
1gang, with “Dimmer” icon
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6234-10-44G**	2CKA006220A0932			10
studio white, matt [1])	**6234-10-44M**	2CKA006220A0933			10
black matt [1])	**6234-10-45M**	2CKA006220A0935			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SRD-1-81	2CKA006220A0149			1
82 ivory white	SRD-1-82	2CKA006220A0520			1
84 studio white	SRD-1-84	2CKA006220A0151			1
840 antique brass	SRD-1-840	2CKA006220A0375			1
866 stainless steel	SRD-1-866	2CKA006220A0537			1
884 studiowhite matt	SRD-1-884	2CKA006220A0605			1
885 black matt	SRD-1-885	2CKA006220A0622			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SRD-1-92	2CKA006220A0639			1
94 alpine white	SRD-1-94	2CKA006220A0673			1
95 chateau-black	SRD-1-95	2CKA006220A0690			1
96 chalet white	SRD-1-96	2CKA006220A0707			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
2gang left/right, without printing
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6230-20-44G**	2CKA006220A0944			10
studio white, matt [1])	**6230-20-44M**	2CKA006220A0945			10
black matt [1])	**6230-20-45M**	2CKA006220A0947			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SR-2-81	2CKA006220A0152			1
82 ivory white	SR-2-82	2CKA006220A0521			1
84 studio white	SR-2-84	2CKA006220A0154			1
840 antique brass	SR-2-840	2CKA006220A0376			1
866 stainless steel	SR-2-866	2CKA006220A0538			1
884 studiowhite matt	SR-2-884	2CKA006220A0606			1
885 black matt	SR-2-885	2CKA006220A0623			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SR-2-92	2CKA006220A0640			1
94 alpine white	SR-2-94	2CKA006220A0674			1
95 chateau-black	SR-2-95	2CKA006220A0691			1
96 chalet white	SR-2-96	2CKA006220A0708			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
2gang left, with “Light” icon
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6231-21-44G**	2CKA006220A0948			10
studio white, matt [1])	**6231-21-44M**	2CKA006220A0949			10
black matt [1])	**6231-21-45M**	2CKA006220A0951			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SRL-2-L-81	2CKA006220A0155			1
82 ivory white	SRL-2-L-82	2CKA006220A0522			1
84 studio white	SRL-2-L-84	2CKA006220A0157			1
840 antique brass	SRL-2-L-840	2CKA006220A0377			1
866 stainless steel	SRL-2-L-866	2CKA006220A0539			1
884 studiowhite matt	SRL-2-L-884	2CKA006220A0607			1
885 black matt	SRL-2-L-885	2CKA006220A0624			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SRL-2-L-92	2CKA006220A0641			1
94 alpine white	SRL-2-L-94	2CKA006220A0675			1
95 chateau-black	SRL-2-L-95	2CKA006220A0692			1
96 chalet white	SRL-2-L-96	2CKA006220A0709			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
2gang left/right, “Blind” icon
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6232-20-44G**	2CKA006220A0964			10
studio white, matt [1])	**6232-20-44M**	2CKA006220A0965			10
black matt [1])	**6232-20-45M**	2CKA006220A0967			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SRB-2-81	2CKA006220A0158			1
82 ivory white	SRB-2-82	2CKA006220A0523			1
84 studio white	SRB-2-84	2CKA006220A0160			1
840 antique brass	SRB-2-840	2CKA006220A0378			1
866 stainless steel	SRB-2-866	2CKA006220A0540			1
884 studiowhite matt	SRB-2-884	2CKA006220A0608			1
885 black matt	SRB-2-885	2CKA006220A0625			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SRB-2-92	2CKA006220A0642			1
94 alpine white	SRB-2-94	2CKA006220A0676			1
95 chateau-black	SRB-2-95	2CKA006220A0693			1
96 chalet white	SRB-2-96	2CKA006220A0710			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
2gang left, with “Scene” icon
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6233-21-44G**	2CKA006220A0968			10
studio white, matt [1])	**6233-21-44M**	2CKA006220A0969			10
black matt [1])	**6233-21-45M**	2CKA006220A0971			10

[1] Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SRS-2-L-81	2CKA006220A0161			1
82 ivory white	SRS-2-L-82	2CKA006220A0524			1
84 studio white	SRS-2-L-84	2CKA006220A0163			1
840 antique brass	SRS-2-L-840	2CKA006220A0379			1
866 stainless steel	SRS-2-L-866	2CKA006220A0541			1
884 studiowhite matt	SRS-2-L-884	2CKA006220A0609			1
885 black matt	SRS-2-L-885	2CKA006220A0626			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SRS-2-L-92	2CKA006220A0643			1
94 alpine white	SRS-2-L-94	2CKA006220A0677			1
95 chateau-black	SRS-2-L-95	2CKA006220A0694			1
96 chalet white	SRS-2-L-96	2CKA006220A0711			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
2gang left, with “Dimmer” icon
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6234-21-44G**	2CKA006220A0956			10
studio white, matt [1])	**6234-21-44M**	2CKA006220A0957			10
black matt [1])	**6234-21-45M**	2CKA006220A0959			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SRD-2-L-81	2CKA006220A0164			1
82 ivory white	SRD-2-L-82	2CKA006220A0525			1
84 studio white	SRD-2-L-84	2CKA006220A0166			1
840 antique brass	SRD-2-L-840	2CKA006220A0380			1
866 stainless steel	SRD-2-L-866	2CKA006220A0542			1
884 studiowhite matt	SRD-2-L-884	2CKA006220A0610			1
885 black matt	SRD-2-L-885	2CKA006220A0627			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SRD-2-L-92	2CKA006220A0644			1
94 alpine white	SRD-2-L-94	2CKA006220A0678			1
95 chateau-black	SRD-2-L-95	2CKA006220A0695			1
96 chalet white	SRD-2-L-96	2CKA006220A0712			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
2gang right, with “Light” icon
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6231-22-44G**	2CKA006220A0952			10
studio white, matt [1])	**6231-22-44M**	2CKA006220A0953			10
black matt [1])	**6231-22-45M**	2CKA006220A0955			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SRL-2-R-81	2CKA006220A0167			1
82 ivory white	SRL-2-R-82	2CKA006220A0527			1
84 studio white	SRL-2-R-84	2CKA006220A0169			1
840 antique brass	SRL-2-R-840	2CKA006220A0381			1
866 stainless steel	SRL-2-R-866	2CKA006220A0544			1
884 studiowhite matt	SRL-2-R-884	2CKA006220A0612			1
885 black matt	SRL-2-R-885	2CKA006220A0629			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SRL-2-R-92	2CKA006220A0646			1
94 alpine white	SRL-2-R-94	2CKA006220A0680			1
95 chateau-black	SRL-2-R-95	2CKA006220A0697			1
96 chalet white	SRL-2-R-96	2CKA006220A0714			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
2gang right, with “Scene” icon
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6233-22-44G**	2CKA006220A0972			10
studio white, matt [1])	**6233-22-44M**	2CKA006220A0973			10
black matt [1])	**6233-22-45M**	2CKA006220A0975			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SRS-2-R-81	2CKA006220A0173			1
82 ivory white	SRS-2-R-82	2CKA006220A0528			1
84 studio white	SRS-2-R-84	2CKA006220A0175			1
840 antique brass	SRS-2-R-840	2CKA006220A0382			1
866 stainless steel	SRS-2-R-866	2CKA006220A0545			1
884 studiowhite matt	SRS-2-R-884	2CKA006220A0613			1
885 black matt	SRS-2-R-885	2CKA006220A0630			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SRS-2-R-92	2CKA006220A0647			1
94 alpine white	SRS-2-R-94	2CKA006220A0681			1
95 chateau-black	SRS-2-R-95	2CKA006220A0698			1
96 chalet white	SRS-2-R-96	2CKA006220A0715			1

ABB-flexTronics®

User Operation - Compatible switch ranges

Rocker
2gang right, with “Dimmer” icon
Cover for ABB-flexTronics® control elements

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
studio white	**6234-22-44G**	2CKA006220A0960			10
studio white, matt [1])	**6234-22-44M**	2CKA006220A0961			10
black matt [1])	**6234-22-45M**	2CKA006220A0963			10

[1]) Surface painted.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®, impressivo

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
81 anthracite	SRD-2-R-81	2CKA006220A0258			1
82 ivory white	SRD-2-R-82	2CKA006220A0526			1
84 studio white	SRD-2-R-84	2CKA006220A0260			1
840 antique brass	SRD-2-R-840	2CKA006220A0383			1
866 stainless steel	SRD-2-R-866	2CKA006220A0543			1
884 studiowhite matt	SRD-2-R-884	2CKA006220A0611			1
885 black matt	SRD-2-R-885	2CKA006220A0628			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece kg	Pack unit pc.
	Type code	Order code			
92 white	SRD-2-R-92	2CKA006220A0645			1
94 alpine white	SRD-2-R-94	2CKA006220A0679			1
95 chateau-black	SRD-2-R-95	2CKA006220A0696			1
96 chalet white	SRD-2-R-96	2CKA006220A0713			1

ABB-flexTronics®

User Operation - ABB Trevion®

KK/U4.55.1

Control Element, 55 x 55 mm

NEW

Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback. Communication over separat bus coupler unit (BAU-F-0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind / shutter control, scene.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK
Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.55.1	2CKA006115A0506		0.0296	1

LFW/A.0.55.1-CK

Cover customized

NEW

Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.55.1).
Ordering possible only with the unique design ID.
The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFW/A.0.55.1-CK	2CKA006199A0162		0.0076	1

LFBT/A.1.55.1-914

Cover with Light Icon, 1-fold Button

NEW

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFBT/A.1.55.1-914	2CKA006199A0174		0.0076	1

ABB-flexTronics®

User Operation - ABB Trevion®

LFJT/A.1.55.1-914

Cover with Blind Icon, 1-fold Button

NEW

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJT/A.1.55.1-914	2CKA006199A0175		0.0076	1

LFST/A.1.55.1-914

Cover with Scene Icon, 1-fold Button

NEW

Labeling field with one scene icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFST/A.1.55.1-914	2CKA006199A0176		0.0076	1

LFDW/A.1.55.1-914

Cover with Dim Icon, 1-fold Rocker

NEW

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFDW/A.1.55.1-914	2CKA006199A0344		0.0076	1

LFJW/A.1.55.1-914

Cover with Blind Icon, 1-fold Rocker

NEW

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFJW/A.1.55.1-914	2CKA006199A0345		0.0076	1

LFAW/A.1.55.1-914

Cover with Up/Down Icon, 1-fold Rocker

NEW

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.55.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
alpine white	–	LFAW/A.1.55.1-914	2CKA006199A0346		0.0076	1

ABB-flexTronics®

User Operation - ABB Trevion®

KK/U4.63.1

Control Element, 63 x 63 mm NEW

Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback. Communication over separat bus coupler unit (BAU-F-0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind/shutter control, scene.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK
Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.63.1	2CKA006115A0504		0.0271	1

LFW/A.0.63.1-CK

Cover customized NEW

Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.63.1.)

Ordering possible only with the unique design ID.
The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
pure plastics	–	LFW/A.0.63.1-CK	2CKA006199A0041		0.0076	1
painted plastics	–	LFW/A.0.63.1-CKL	2CKA006199A0514		0.0076	1

ABB-flexTronics®

User Operation - ABB Trevion®

LFW/A.1.63.1-81

Cover without Icon, 1-fold

NEW

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFW/A.1.63.1-81	2CKA006199A0098		0.0076	1
ivory white	–	LFW/A.1.63.1-82	2CKA006199A0099		0.0076	1
aluminium silver	–	LFW/A.1.63.1-83	2CKA006199A0100		0.0076	1
studio white	–	LFW/A.1.63.1-84	2CKA006199A0101		0.0076	1
studio white matt	–	LFW/A.1.63.1-884	2CKA006199A0102		0.0076	1
black matt	–	LFW/A.1.63.1-885	2CKA006199A0103		0.0076	1
stainless steel	–	LFW/A.1.63.1-866	2CKA006199A0105		0.0076	1

LFBT/A.1.63.1-81

Cover with Light Icon, 1-fold Button

NEW

Labeling field with light icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFBT/A.1.63.1-81	2CKA006199A0134		0.0076	1
ivory white	–	LFBT/A.1.63.1-82	2CKA006199A0135		0.0076	1
aluminium silver	–	LFBT/A.1.63.1-83	2CKA006199A0136		0.0076	1
studio white	–	LFBT/A.1.63.1-84	2CKA006199A0137		0.0076	1
studio white matt	–	LFBT/A.1.63.1-884	2CKA006199A0138		0.0076	1
black matt	–	LFBT/A.1.63.1-885	2CKA006199A0139		0.0076	1
stainless steel	–	LFBT/A.1.63.1-866	2CKA006199A0141		0.0076	1

ABB-flexTronics®

User Operation - ABB Trevion®

LFJT/A.1.63.1-81

Cover with Blind Icon, 1-fold Button

NEW

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFJT/A.1.63.1-81	2CKA006199A0143		0.0076	1
aluminium silver	–	LFJT/A.1.63.1-83	2CKA006199A0145		0.0076	1
studio white	–	LFJT/A.1.63.1-84	2CKA006199A0146		0.0076	1
studio white matt	–	LFJT/A.1.63.1-884	2CKA006199A0147		0.0076	1
black matt	–	LFJT/A.1.63.1-885	2CKA006199A0148		0.0076	1
stainless steel	–	LFJT/A.1.63.1-866	2CKA006199A0150		0.0076	1

LFAW/A.1.63.1-81

Cover with Up/Down Icon, 1-fold Button

NEW

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.63.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
anthracite	–	LFAW/A.1.63.1-81	2CKA006199A0279		0.0076	1
aluminium silver	–	LFAW/A.1.63.1-83	2CKA006199A0281		0.0076	1
studio white	–	LFAW/A.1.63.1-84	2CKA006199A0282		0.0076	1
studio white matt	–	LFAW/A.1.63.1-884	2CKA006199A0283		0.0076	1
black matt	–	LFAW/A.1.63.1-885	2CKA006199A0284		0.0076	1
stainless steel	–	LFAW/A.1.63.1-866	2CKA006199A0286		0.0076	1

ABB-flexTronics®

User Operation - ABB Trevion®

KK/U4.70.1

Control Element, 70 x 70 mm NEW

Freely configurable multifunction keypad 1- up to 4-fold with acoustic feedback. Communication over separat bus coupler unit (BAU-F-0.1). Operation via tapping or swiping of the parametrized functions, e.g., switching, dimming, blind/shutter control, scene.

- Primary function
- Integrated temperature sensor
- Buzzer for acoustic feedback
- Support of functions/status through innovative RGB light guide concept
- Day/night mode
- Orientation light
- Alarm function supported over light guide and acoustic feedback, e.g. 5 logic channels for KNX
- Light scene actuator
- Logic gates, etc.
- Sequencer
- Staircase function

Optional Removal protection: CSE/U0.1.xx.CK
Number of bus subscribers: 1

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	KK/U4.70.1	2CKA006115A0510		0.11586	1

LFW/A.0.70.1-CK

Cover customized NEW

Freely configurable labeling field for keypad 1 – 4-fold (KK/U4.70.1.)

Ordering possible only with the unique design ID.
The icons and/or texts are configured over a web configuration tool.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
pure plastics	–	LFW/A.0.70.1-CK	2CKA006199A0025		0.011586	1
painted plastics	–	LFW/A.0.70.1-CKL	2CKA006199A0519		0.011586	1

ABB-flexTronics®

User Operation - ABB Trevion®

LFW/A.1.70.1-44G

Cover without Icon, 1-fold

NEW

Labeling field without icon/text for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFW/A.1.70.1-44G	2CKA006199A0435		0.011586	1
white matt	–	LFW/A.1.70.1-44M	2CKA006199A0451		0.011586	1
black matt	–	LFW/A.1.70.1-45M	2CKA006199A0483		0.011586	1

LFJ/A.1.70.1-44G

Cover with Blind Icon, 1-fold Button

NEW

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFJ/A.1.70.1-44G	2CKA006199A0440		0.011586	1
white matt	–	LFJ/A.1.70.1-44M	2CKA006199A0456		0.011586	1
black matt	–	LFJ/A.1.70.1-45M	2CKA006199A0488		0.011586	1

LFS/A.1.70.1-44G

Cover with Scene Icon, 1-fold Button

NEW

Labeling field with one scene icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFS/A.1.70.1-44G	2CKA006199A0441		0.011586	1
white matt	–	LFS/A.1.70.1-44M	2CKA006199A0457		0.011586	1
black matt	–	LFS/A.1.70.1-45M	2CKA006199A0489		0.011586	1

LFDW/A.1.70.1-44G

Cover with Dim Icon, 1-fold Rocker

NEW

Labeling field with one dimming icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFDW/A.1.70.1-44G	2CKA006199A0442		0.011586	1
white matt	–	LFDW/A.1.70.1-44M	2CKA006199A0458		0.011586	1
black matt	–	LFDW/A.1.70.1-45M	2CKA006199A0490		0.011586	1

ABB-flexTronics®

User Operation - ABB Trevion®

LFJW/A.1.70.1-44G

Cover with Blind Icon, 1-fold Rocker

NEW

Labeling field with blind icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFJW/A.1.70.1-44G	2CKA006199A0443		0.011586	1
white matt	–	LFJW/A.1.70.1-44M	2CKA006199A0459		0.011586	1
black matt	–	LFJW/A.1.70.1-45M	2CKA006199A0491		0.011586	1

LFAW/A.1.70.1-44G

Cover with Up/Down Icon, 1-fold Rocker

NEW

Labeling field with up/down icon for keypad 1 – 4-fold (KK/U4.70.1).

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code	€	kg	pc.
white	–	LFAW/A.1.70.1-44G	2CKA006199A0444		0.011586	1
white matt	–	LFAW/A.1.70.1-44M	2CKA006199A0460		0.011586	1
black matt	–	LFAW/A.1.70.1-45M	2CKA006199A0492		0.011586	1

ABB-flexTronics®

Comfort switch

Busch-Comfort switch® flex Control Element Movement sensor with Orientation light
Movement detector push-button switch combination.
For switching lighting systems that depend on brightness and movement.
With select lens, prevents detection of smaller animal. Push switch function possible at all times.
With notice LED when manual operation is necessary.
Extension of the detection range by main unit/extension unit combination.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
Adjustable operating mode: automatic mode, automatic (motion-controlled) switch-on and switch-off.
Adjustable operating mode: semiautomatic, manual switch-on, automatic (timer and movement-controlled) switch-off.
Adjustable operating mode: automatic mode, automatic switch-on, manual switch-off. With continuous light/continuous Off function.
Adjusting elements on rear side.
Surveillance density: 9 sectors with 28 switching segments.
Switch off delay: 1 to 10 min., adjustable.
Compatible with all ABB flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Display elements: LED for status display.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Brightness limit value: 5 Lux - daytime operation.
Hight above the wall: 21 mm.
The detection range specifications refer to an ambient temperature of 21°C.

Busch-art linear®

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white	**64765-44G**	2CKA006800A3144	1
studio white, matt [1])	**64765-44M**	2CKA006800A3145	1
black matt [1])	**64765-45M**	2CKA006800A3147	1
Solo®			
ivory white	**64765-82-500**	2CKA006800A2885	1
studio white	**64765-84-500**	2CKA006800A2889	1
Busch-axcent®			
anthracite	**64765-81-500**	2CKA006800A2883	1
aluminium silver [3])	**64765-83-500**	2CKA006800A2887	1
studio white	**64765-84-500**	2CKA006800A2889	1
studio white, matt [3])	**64765-884-500**	2CKA006800A2893	1
black matt [3])	**64765-885-500**	2CKA006800A2895	1
carat®			
anthracite	**64765-81-500**	2CKA006800A2883	1
ivory white	**64765-82-500**	2CKA006800A2885	1
studio white	**64765-84-500**	2CKA006800A2889	1
studio white, matt [3])	**64765-884-500**	2CKA006800A2893	1
black matt [3])	**64765-885-500**	2CKA006800A2895	1

ABB-flexTronics®
Comfort switch

pure stainless steel

stainless steel	**64765-866-500**	2CKA006800A2898	1

Busch-dynasty®

anthracite	**64765-81-500**	2CKA006800A2883	1
ivory white	**64765-82-500**	2CKA006800A2885	1

future® linear

anthracite	**64765-81-500**	2CKA006800A2883	1
ivory white	**64765-82-500**	2CKA006800A2885	1
aluminium silver [3])	**64765-83-500**	2CKA006800A2887	1
studio white	**64765-84-500**	2CKA006800A2889	1
studio white, matt [3])	**64765-884-500**	2CKA006800A2893	1
black matt [3])	**64765-885-500**	2CKA006800A2895	1

basic 55

white	**64765-92-507**	2CKA006800A2903	1
alpine white	**64765-94-507**	2CKA006800A2905	1
château-black	**64765-95-507**	2CKA006800A2906	1

[1]) Please order the respective flush-mounted insert separately.
[2]) The range specifications refer only to an ambient temperature of 21°C.
[3]) Surface painted.

Busch-Comfort switch flex [1]) [2]) Complete set with comfort switch sensor and relay insert
Ready-to-install movement detector push-button switch combination (set packaging).
Consisting of Busch-Comfort switch flex sensor, 64765-84-500.
Consisting of relay insert flex, 1gang, 64811 U-500.
Consisting of future® linear cover frames, 1gang 1721-184K-500.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Display elements: LED for status display.
Rated voltage: 230 V~.
Rated frequency: 50 Hz.
Power dissipation: 0,3 W.
Outputs: 1x normally open contact, potential-bound.
Suitable for: 230 V- LEDi, typical, rated power: 300 VA.
Suitable for: 230 V incandescent lamps / 230 V halogen lamps, rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via transformers, rated power: 2300 VA.
Suitable for: Fluorescent lamps, Rated output: 2300 VA.
Rated current: 10 AX, cos ϕ0.9.
Detection range: frontal: 5 m, lateral: 3 m, at mounting height: 1.1 m.
Detection angle: 170°.
Brightness limit value: 5 Lux - daytime operation.
Operation mounting height: 0.8 m - 1.2 m.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 85 mm x 85 mm x 46 mm.
Mounting depth: 25 mm.

future® linear

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white	**64765 UJ-84-500**	2CKA006800A2914	1

[1]) The range specifications refer only to an ambient temperature of 21°C.
[2]) Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

ABB-flexTronics®
Motion detectors

Busch-Watchdog 180 flex, basic sensor [1] [2]) with select-lens
Movement detector sensor with with measurement of ambient light.
For automatic switching of devices dependent on motion and brightness.
Compatible with all ABB-flexTronics® inserts. Adjusting elements on rear side.
Extension of the detection range by main unit/extension unit combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
With detection display in test mode. Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500. Hight above the wall: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range at mounting height 1.1 m: frontal: 12 m, lateral: 12 m.
Detection angle: 180°.
Brightness limit value: 5 Lux - 500 Lux, up to daytime operation.
Mounting height: 0.8 m - 1.2 m.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm
The detection range specifications refer to an ambient temperature of 21°C.

Busch-art linear®

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white	**64761-44G-500**	2CKA006800A3124	1
studio white, matt [3])	**64761-44M-500**	2CKA006800A3125	1
black matt [3])	**64761-45M-500**	2CKA006800A3127	1
future® linear			
anthracite	**64761-81-500**	2CKA006800A2921	1
ivory white	**64761-82-500**	2CKA006800A2923	1
aluminium silver [3])	**64761-83-500**	2CKA006800A2925	1
studio white	**64761-84-500**	2CKA006800A2927	1
studio white, matt [3])	**64761-884-500**	2CKA006800A2931	1
black matt [3])	**64761-885-500**	2CKA006800A2933	1
solo®			
ivory white	**64761-82-500**	2CKA006800A2923	1
studio white	**64761-84-500**	2CKA006800A2927	1
Busch-axcent®			
anthracite	**64761-81-500**	2CKA006800A2921	1
aluminium silver [3])	**64761-83-500**	2CKA006800A2925	1
studio white	**64761-84-500**	2CKA006800A2927	1
studio white, matt [3])	**64761-884-500**	2CKA006800A2931	1
black matt [3])	**64761-885-500**	2CKA006800A2933	1
impressivo			
anthracite	**54761-81-500**	2CKA006800A2921	1
aluminium silver [3])	**54761-83-500**	2CKA006800A2925	1
studio white	**54761-84-500**	2CKA006800A2927	1
black matt [3])	**54761-885-500**	2CKA006800A2933	1

ABB-flexTronics®
Motion detectors

carat®			
anthracite	**64761-81-500**	2CKA006800A2921	1
ivory white	**64761-82-500**	2CKA006800A2923	1
studio white	**64761-84-500**	2CKA006800A2927	1
studio white, matt [3])	**64761-884-500**	2CKA006800A2931	1
black matt [3])	**64761-885-500**	2CKA006800A2933	1
pure stainless steel			
stainless steel	**64761-866-500**	2CKA006800A2936	1
Busch-dynasty®			
anthracite	**64761-81-500**	2CKA006800A2921	1
ivory white	**64761-82-500**	2CKA006800A2923	1
basic 55			
white	**64761-92-507**	2CKA006800A2941	1
alpine white	**64761-94-507**	2CKA006800A2943	1
château-black	**64761-95-507**	2CKA006800A2944	1

[1]) Please order the respective flush-mounted insert separately.
[2]) The range specifications refer only to an ambient temperature of 21°C.
[3]) Surface painted.

Busch-Watchdog 180 flex [1]) [2])
Ready-to-install movement detector for flush-mounted installation (set packaged).
Consisting of Busch-Watchdog 180 flex, basic sensor 64761-84-500.
Consisting of relay insert flex, 1gang, 64811 U-500.
Consisting of future® linear cover frames, 1gang 1721-184K-500.
Rated voltage: 230 V~
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical., rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via
transformers, rated power: 2300 VA.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m.
Detection angle: 180°.
Brightness limit value: 5 Lux - 500 Lux Up to daytime operation.
Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 48 mm
Mounting depth: 25 mm.
The detection range specifications refer to an ambient temperature of 21°C.

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white	**64761 UJ-84-500**	2CKA006800A2951	1

[1]) Please order the respective flush-mounted insert separately.
[2]) The range specifications refer only to an ambient temperature of 21°C.
[3]) Surface painted.

ABB-flexTronics®
Motion detectors

Busch-Watchdog 180 flex, comfort sensor [1] [2] with select-lens
Movement detector sensor with with measurement of ambient light.
For automatic switching of devices dependent on motion and brightness.
Push switch function possible at all times.
In combination with dimmer insert flex: dimming function of lighting and selectable light value storage.
With enabling of pre-warning of switch-off for stairwell operation.
Compatible with all ABB-flexTronics® inserts.
Adjusting elements on rear side.
Extension of the detection range by main unit/extension unit combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
With continuous light/continuous Off function.
With detection display in test mode.
Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Hight above the wall: 22 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range at mounting height 1.1 m: frontal: 12 m, lateral: 12 m.
Detection angle: 180°.
Brightness limit value: 5 Lux - 500 Lux, up to daytime operation.
Mounting height: 0.8 m - 1.2 m.
Temperature range (Device): -5 °C to 45°C.
Dimensions: (L x W x D): 63 mm x 63 mm x 35 mm.
The detection range specifications refer to an ambient temperature of 21°C.

Busch-art linear®

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white	**64762-44G-500**	2CKA006800A3132	1
studio white, matt [3]	**64762-44M-500**	2CKA006800A3133	1
black matt [3]	**64762-45M-500**	2CKA006800A3135	1
future® linear			
anthracite	**64762-81-500**	2CKA006800A2958	1
ivory white	**64762-82-500**	2CKA006800A2960	1
aluminium silver [3]	**64762-83-500**	2CKA006800A2962	1
studio white	**64762-84-500**	2CKA006800A2964	1
studio white, matt [3]	**64762-884-500**	2CKA006800A2968	1
black matt [3]	**64762-885-500**	2CKA006800A2970	1
solo®			
ivory white	**64762-82-500**	2CKA006800A2960	1
studio white	**64762-84-500**	2CKA006800A2964	1
Busch-axcent®			
anthracite	**64762-81-500**	2CKA006800A2958	1
aluminium silver [3]	**64765-83-500**	2CKA006800A2887	1
studio white	**64762-84-500**	2CKA006800A2964	1
grey metallic [3]	**64762-803-500**	2CKA006800A2966	1
studio white matt [3]	**64762-884-500**	2CKA006800A2968	1

ABB-flexTronics®
Motion detectors

impressivo			
anthracite	**54761-81-500**	2CKA006800A2958	1
aluminium silver [3])	**54761-83-500**	2CKA006800A2962	1
studio white	**54761-84-500**	2CKA006800A2964	1
black matt [3])	**54761-885-500**	2CKA006800A2970	1
carat®			
ivory white	**64762-81-500**	2CKA006800A2958	1
anthracite	**64762-82-500**	2CKA006800A2960	1
studio white	**64762-84-500**	2CKA006800A2964	1
studio white, matt [3])	**64762-884-500**	2CKA006800A2968	1
black matt [3])	**64762-885-500**	2CKA006800A2970	1
pure stainless steel			
stainless steel	**64762-866-500**	2CKA006800A2973	1
Busch-dynasty®			
anthracite	**64762-81-500**	2CKA006800A2958	1
ivory white	**64762-82-500**	2CKA006800A2960	1
basic 55			
white	**64762-92-507**	2CKA006800A2978	1
alpine white	**64762-94-507**	2CKA006800A2980	1
château-black	**64762-95-507**	2CKA006800A2981	1

[1]) Please order the respective flush-mounted insert separately.
[2]) The range specifications refer only to an ambient temperature of 21°C.
[3]) Surface painted.

Busch-Watchdog 180 flex [1]) [2])
Ready-to-install movement detector for flush-mounted installation (set packaged).
Consisting of Busch-Watchdog 180 flex, comfort sensor with select lens 64762-84-500.
Consisting of relay insert flex, 1gang, 64811 U-500.
Consisting of future® linear cover frames, 1gang 1721-184K-500.
Rated voltage: 230 V~
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical., rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via
transformers, rated power: 2300 VA.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m.
Detection angle: 180°.
Brightness limit value: 5 Lux - 500 Lux, up to daytime operation.
Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 48 mm
Mounting depth: 25 mm.
The detection range specifications refer to an ambient temperature of 21°C.

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white	**64762 UJ-84-500**	2CKA006800A2988	1

[1]) Please order the respective flush-mounted insert separately.
[2]) The range specifications refer only to an ambient temperature of 21°C.
[3]) Surface painted.

ABB-flexTronics®

Motion detectors

Busch-Watchdog 180 flex, comfort sensor [1] [2]) with multi-lens
Movement detector sensor with with measurement of ambient light.
For automatic switching of devices dependent on motion and brightness.
With 4 detection levels.
In combination with dimmer insert flex: dimming function of lighting and selectable light value storage.
Compatible with all ABBflexTronics® inserts.
Adjusting elements on rear side.
Multi-lens: suitable also for mounting heights of 2.20 m.
Extension of the detection range by main unit/extension unit combination.
Additional activation/deactivation option via push-button input on the flush-mounted insert.
With continuous light/continuous Off function.
With detection display in test mode.
Surveillance density: 54 sectors with 224 switching segments. Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Hight above the wall: 31 mm.
Control element: 2 controllers for setting the brightness switching threshold and switch-off delay.
Detection range at mounting height 1.1 m: frontal: 8 m, lateral: 7 m.
Detection rang at mounting height: 2.2 m: frontal: 8 m, lateral: 8 m.
Detection angle: 180 °.
Brightness limit value: 5 Lux - 500 Lux. up to daytime operation.
Mounting height: 0.8 m - 1.2 m, alternative: 2.2 m.
Temperature range (Device): -5 °C to 45 °C.
Dimensions: (L x W x D): 63 mm x 63 mm x 45 mm.
The detection range specifications refer to an ambient temperature of 21°C.

Busch-art linear®

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white	**64764-44G**	2CKA006800A3140	1
studio white, matt [3])	**64764-44M-500**	2CKA006800A3141	1
black matt [3])	**64764-45M-500**	2CKA006800A3143	1
future® linear			
anthracite	**64764-81-500**	2CKA006800A2995	1
ivory white	**64764-82-500**	2CKA006800A2997	1
aluminium silver [3])	**64764-83-500**	2CKA006800A2999	1
studio white	**64764-84-500**	2CKA006800A3001	1
studio white, matt [3])	**64764-884-500**	2CKA006800A3005	1
black matt [3])	**64764-885-500**	2CKA006800A3007	1
solo®			
ivory white	**64764-82-500**	2CKA006800A2997	1
studio white	**64764-84-500**	2CKA006800A3001	1
Busch-axcent®			
anthracite	**64764-81-500**	2CKA006800A2995	1
aluminium silver [3])	**64764-83-500**	2CKA006800A2999	1
studio white	**64764-84-500**	2CKA006800A3001	1
studio white matt [3])	**64764-884-500**	2CKA006800A3005	1
black matt [3])	**64764-885-500**	2CKA006800A3007	1

ABB-flexTronics®
Motion detectors

impressivo			
anthracite	**54761-81-500**	2CKA006800A2995	1
aluminium silver [3])	**54761-83-500**	2CKA006800A2999	1
studio white	**54761-84-500**	2CKA006800A3001	1
black matt [3])	**54761-885-500**	2CKA006800A3007	1
carat®			
anthracite	**64764-81-500**	2CKA006800A2995	1
ivory white	**64764-82-500**	2CKA006800A2997	1
studio white	**64764-84-500**	2CKA006800A3001	1
studio white, matt [3])	**64764-884-500**	2CKA006800A3005	1
black matt [3])	**64764-885-500**	2CKA006800A3007	1
pure stainless steel			
stainless steel	**64764-866-500**	2CKA006800A3010	1
Busch-dynasty®			
anthracite	**64764-840-500**	2CKA006800A3008	1
ivory white	**64764-81-500**	2CKA006800A2995	1
basic 55			
white	**64764-92-507**	2CKA006800A3015	1
alpine white	**64764-94-507**	2CKA006800A3017	1
château-black	**64764-95-507**	2CKA006800A3018	1

[1] Please order the respective flush-mounted insert separately.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Surface painted.

Busch-Watchdog 180 flex [1]) [2]) Complete set with Comfort sensor multi-lens and relay insert
Ready-to-install movement detector for flush-mounted installation (set packaged).
Consisting of Busch-Watchdog 180 flex, comfort sensor with multi lens 64764-84-500.
Consisting of relay insert flex, 1gang, 64811 U-500.
Consisting of future® linear cover frames, 1gang 1721-184K-500.
Rated voltage: 230 V~
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical., rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via
transformers, rated power: 2300 VA.
Detection range: frontal: 8 m, lateral: 7 m, mounting height: 1.1 m.
Detection range: frontal: 8 m, lateral: 8 m, mounting height: 2.2 m.
Detection angle: 180°.
Brightness limit value: 5 Lux - 500 Lux, up to daytime operation.
Mounting height: 0.8 m - 1.2 m, alternative: 2.2 m.
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 57 mm
Mounting depth: 25 mm.
The detection range specifications refer to an ambient temperature of 21°C.

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white	**64764 UJ-84-500**	2CKA006800A3025	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

ABB-flexTronics®

Presence detectors

ABB flexTronic presence detector, universal Sensor [1] [2] [3] 12 meters
Presence detector sensor with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
Detection range at mounting height of 3 m: circular. Seated persons up to Ø 10 m, walking persons up to Ø 12 m.
Extension of the detection range by main unit/extension unit combination.
On wall / on ceiling height: 35 mm.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/duration-off function (8 hrs), IR service remote control necessary.
With teach-in function of the brightness switching threshold, IR service remote control required.
With brightness-independent test mode for evaluating the detection zone.
With detection LED at test mode.
Remote control possible via IR service remote control 6843.
Adjustment elements accessible on the front side.
Surveillance density: 72 sectors with 640 switching segments.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse.
Compatible with all Busch-flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
The detection range specifications refer to an ambient temperature of 21°C.

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white matt	**64753-24-500**	2CKA006800A3027	1
aluminium silver	**64753-183-500**	2CKA006800A3029	1

[1] The detection range with a central approach is reduced.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Please order the respective flush-mounted insert separately.

ABB flexTronic presence detector flex set with universal sensor and relay insert
Modular presence detector with universal lens (set packaging).
Detection range at mounting height of 3 m: circular. Seated persons up to Ø 10 m, walking persons up to Ø 12 m.
Consisting of ABB presence detector flex universal sensor, 64753-24-500.
Consisting of relay insert flex, 1-way 64811 U-500.

Color	Order details		Pack unit
	Type code	Order code	pc.
	64753 U-24-500	2CKA006800A3038	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

ABB-flexTronics®

Presence detectors

ABB flexTronic presence detector, sky sensor
Presence detector sensor with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
Detection range at mounting height 6 m: circular. Walking persons Ø: max. 18 m.
Detection range at mounting height 12 m: circular. Walking persons Ø: max. 24 m.
Extension of the detection range by main unit/extension unit combination.
On wall / on ceiling height: 35 mm.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With brightness-independent test mode for evaluating the detection zone.
With detection LED at test mode.
Adjustment elements accessible on the front side.
Surveillance density: 72 sectors with 640 switching segments.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse.
Compatible with all Busch-flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
The detection range specifications refer to an ambient temperature of 21°C.

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white matt	**64754-24-500**	2CKA006800A3031	1
aluminium silver	**64754-183-500**	2CKA006800A3033	1

[1] The detection range with a central approach is reduced.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Please order the respective flush-mounted insert separately.

ABB flexTronic presence detector flex set with sky sensor and relay insert
Modular presence detector with sky lens (set packaging).
Detection range at mounting height of 6 m: circular. Walking persons up to Ø 18 m.
Detection range at mounting height of 12 m: circular. Walking persons up to Ø 24 m.
Consisting of ABB presence detector flex sky sensor, 64754-24-500.
Consisting of relay insert flex, 1-way 64811 U-500.

Color	Order details		Pack unit
	Type code	Order code	pc.
	64754 U-24-500	2CKA006800A3039	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

ABB-flexTronics®

Presence detectors

ABB flexTronic presence detector, corridor sensor
Presence detector sensor with mixed light measurement.
For switching lighting systems that depend on brightness and movement.
Detection range at mounting height of 3 m: rectangular. Walking persons: crosswise to the detector 24 m x 3 m, frontal/lengthways to the detector 14 m x 3 m.
Extension of the detection range by main unit/extension unit combination.
On wall / on ceiling height: 39 mm.
For semiautomatic and fully automatic operation.
Additional activation/deactivation possibility through pushbutton input.
With continuous light/duration-off function (8 hrs), IR service remote control necessary.
With teach-in function of the brightness switching threshold, IR service remote control required.
With brightness-independent test mode for evaluating the detection zone.
With detection LED at test mode.
Remote control possible via IR service remote control 6843.
Adjustment elements accessible on the front side.
Surveillance density: 92 sectors with 368 switching segments.
Switch-off delay: approx. 1 min. - 30 min. or short-time pulse.
Compatible with all Busch-flexTronics inserts.
For relay insert flex, 1gang, 64811 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
The detection range specifications refer to an ambient temperature of 21°C.

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white matt	**64755-24-500**	2CKA006800A3035	1
aluminium silver	**64755-183-500**	2CKA006800A3037	1

[1] The detection range with a central approach is reduced.
[2] The range specifications refer only to an ambient temperature of 21°C.
[3] Please order the respective flush-mounted insert separately.

ABB flexTronic presence detector flex set with corridor sensor and relay insert
Modular presence detector with corridor lens (set packaging).
Detection range at mounting height of 3 m: rectangular. walking persons crosswise to the detector up to 24 m x 3 m / frontal/lengthways to the detector up to 14 m x 3 m.
Consisting of ABB presence detector flex corridor sensor, 64755-24-500.
Consisting of relay insert flex, 1-way 64811 U-500.

Color	Order details		Pack unit
	Type code	Order code	pc.
	64755 U-24-500	2CKA006800A3040	1

[1] The range specifications refer only to an ambient temperature of 21°C.
[2] Only in conjunction with standard flush-mounting boxes according to DIN 49073, erect or Busch-Jaeger No. 3040 wallbox stonework, 3050 wallbox cavity wall or 3060 wallbox concrete)

ABB-flexTronics®
Presence detectors

Busch-Presence detector Universal, decor frame [1])
Paintable decor frame for individual design.
For presence detectors with Compact and Universal lens.
For ABB flexTronic presence detector sensors with universal and sky lens.
For latching onto the presence detector.
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 23 mm

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white matt	**6889/30-24-500**	2CKA006800A2765	10

[1]) The decor frame included in the scope of delivery of the presence detector must be removed before mounting.

Busch movement detector Corridor, decor frame [1])
Paintable decor frame for individual design.
For presence detector with Corridor lens.
For ABB flexTronic presence detector sensor with corridor lens.
For latching onto the presence detector.
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 94 mm x 94 mm x 27 mm

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white matt	**6889/50-24-500**	2CKA006800A2801	10

[1]) The decor frame included in the scope of delivery of the presence detector must be removed before mounting.

Presence detector surface-mounting housing
For installing a ABB flexTronic insert in combination with the ABB flexTronic presence detector sensor. Compatible with all flexTronic inserts.
For ABB flexTronic presence detector sensors 6853-...-500, 6854-...-500 and 6855-...-500.
For relay insert flex, 1gang, 64811 U-500.
For series relay insert flex, 2gang, 64821 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For extension insert flex, 64891 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.

Color	Order details		Pack unit
	Type code	Order code	pc.
studio white matt	**6883-24-500**	2CKA006899A2369	1
aluminium silver	**6883-183-500**	2CKA006899A2371	1

[1]) The decor frame included in the scope of delivery of the presence detector must be removed before mounting.

ABB-flexTronics® wireless

Motion detectors wireless

Busch-Watchdog 180 flex, comfort sensor, wireless with select-lens
For automatic switching of devices dependent on motion and brightness.
Push switch function possible at all times.
In combination with dimmer insert flex: dimming function of lighting and selectable light value storage.
With time-controlled basic illumination function.
With time-controlled night anti-glare function.
With enabling of pre-warning of switch-off for stairwell operation.
Compatible with all ABB-flexTronics® inserts.
Works with free@home wireless.
Remote operation via the Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® Next app or via the web interface of the System Access Point.
Extension of the detection range by main unit/extension unit combination.
Additional activation option via pushbutton input on the flush-mounted insert.
Timer with Astro function.
Automatic switchover from summer time to winter time (switch-off function).
With continuous light/continuous Off function.
With brightness-independent test mode for evaluating the detection zone.
With detection LED at test mode.
Surveillance density: 14 sectors with 56 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For relay insert flex, 2gang, 64821 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Hight above the wall: 22 mm.
Temperature range (device): -5 °C - 45 °C.
Detection range: frontal at mounting height1.1 m: 12 m, lateral: 12 m.
Brightness limit value: 5 Lux - up to daytime operation.
Detection angle: 180°.
Dimensions: (L x W x D): 55 mm x 55 mm x 35 m.
Mounting height: 0.8 m - 1.2 m.
The detection range specifications refer to an ambient temperature of 21°C.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
anthracite	62762-81-WL-500	2CKA006200A0166			1
ivory white	62762-82-WL-500	2CKA006200A0168			1
aluminium silver [1)]	62762-83-WL-500	2CKA006200A0170			1
studio white	62762-84-WL-500	2CKA006200A0172			1
studio white, matt [1)]	62762-884-WL-500	2CKA006200A0176			1
black matt [1)]	62762-885-WL-500	2CKA006200A0178			1
stainless steel	62762-866-WL-500	2CKA006200A0181			1

1) Surface painted. 2) Real metal surface refined by hand. Rocker

solo®

WIRELESS					
ivory white	62762-82-WL-500	2CKA006200A0168			1
studio white	62762-84-WL-500	2CKA006200A0172			1

1) Surface painted.

ABB-flexTronics® wireless

Motion detectors wireless

Busch-axcent®

WIRELESS			
anthracite	62762-81-WL-500	2CKA006200A0166	1
aluminium silver [3])	62762-83-WL-500	2CKA006200A0170	1
studio white	62762-84-WL-500	2CKA006200A0172	1
studio white matt [3])	62762-884-WL-500	2CKA006200A0176	1
black matt [3])	62762-885-WL-500	2CKA006200A0178	1

1) Surface painted.

basic55®

WIRELESS			
white	62762-92-WL-507	2CKA006200A0186	1
alpine white	62762-94-WL-507	2CKA006200A0188	1
château-black	62762-95-WL-507	2CKA006200A0189	1

1) Surface painted.

Busch-art linear®

WIRELESS			
studio white	62762-44G-WL-500	2CKA006200A0302	1
studio white, matt [1])	62762-44M-WL-500	2CKA006200A0303	1
black matt [1])	62762-45M-WL-500	2CKA006200A0305	1

1) Surface painted.

Busch-Watchdog 180 flex, wireless. Complete set with Comfort sensor select lens and relay insert
Consisting of Busch-Watchdog 180 flex comfort sensor with select lens, 62762-84-WL-500.
Consisting of relay insert flex, 1gang, 64811 U-500.
Consisting of future® linear cover frame, 1gang 1721-184K-500.
Rated voltage: 230 V~
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical., rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via transformers, rated power: 2300 VA.
Detection range: frontal: 12 m, lateral: 12 m, Mounting height: 1.1 m.
Detection angle: 180°.
Brightness limit value: 5 Lux - 500 Lux, up to daytime operation.
Mounting height: 0.8 m - 1.2 m
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 48 mm
Mounting depth: 25 mm.

	Order details		Pack unit
	Type code	Order code	pc.
WIRELESS			
	62762 UJ-84-WL-500	2CKA006200A0196	1

ABB-flexTronics® wireless

Motion detectors wireless

Busch-Watchdog 180 flex, comfort sensor, wireless with multi-lens
For automatic switching of devices dependent on motion and brightness.
Push switch function possible at all times.
For detection down to the floor. For detection in stairwells. With 4 detection levels.
In combination with dimmer insert flex: dimming function of lighting and selectable light value storage. With time-controlled basic illumination function.
With time-controlled night antiglare function.
With enabling of pre-warning of switch-off for stairwell operation.
Compatible with all ABB-flexTronics® inserts. Remote operation via the Bluetooth and smartphone/tablet app. Multi-lens: suitable also for mounting heights of 2.20 m.
Extension of the detection range by main unit/extension unit combination.
Additional activation option via push-button input on the flush-mounted insert.
Timer with Astro function.
Automatic switchover from summer time to winter time (switch-off function).
With continuous light/continuous Off function.
With brightness independent test mode for evaluating the detection zone.
With detection LED at test mode.
Surveillance density: 54 sectors with 224 switching segments.
Switch-off delay: approx. 10 sec - 30 min or short-time pulse 1 sec adjustable.
For relay insert flex, 1gang, 64811 U-500.
For e-contact insert flex, 1gang, 64814 U-500.
For relay insert flex, 2gang, 64821 U-500.
For LED touch dimmer insert flex, 1gang, 64851 U-500.
For extension insert flex, 64891 U-500.
Hight above the wall: 31 mm.
Temperature range (device): -5 °C - 45 °C.
Detection range at mounting height 1.1 m: frontal: 8 m, lateral: 7 m.
Detection range at mounting height: 2.2 m: frontal: 8 m, lateral: 8 m.
Brightness limit value: 5 Lux - up to daytime operation.
Detection angle: 180 °.
Dimensions: (L x W x D): 55 mm x 55 mm x 45 mm.
Mounting height: 0.8 m - 1.2 m, alternatively: 2.2 m.
The detection range specifications refer to an ambient temperature of 21°C.

future® linear

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
anthracite	62764-81-WL-500	2CKA006200A0234			1
ivory white	62764-82-WL-500	2CKA006200A0236			1
aluminium silver [1]	62764-83-WL-500	2CKA006200A0238			1
studio white	62764-84-WL-500	2CKA006200A0240			1
studio white, matt [1]	62764-884-WL-500	2CKA006200A0244			1
black matt [1]	62764-885-WL-500	2CKA006200A0246			1
stainless steel	62764-866-WL-500	2CKA006200A0249			1

1) Surface painted. 2) Real metal surface refined by hand. Rocker

solo®

WIRELESS					
ivory white	62764-82-WL-500	2CKA006200A0236			1
studio white	62764-84-WL-500	2CKA006200A0240			1

1) Surface painted.

ABB-flexTronics® wireless

Motion detectors wireless

Busch-axcent®

WIRELESS			
anthracite	62764-81-WL-500	2CKA006200A0234	1
aluminium silver [3])	62764-83-WL-500	2CKA006200A0238	1
studio white	62764-84-WL-500	2CKA006200A0240	1
studio white matt [3])	62764-884-WL-500	2CKA006200A0244	1
black matt [3])	62764-885-WL-500	2CKA006200A0246	1

1) Surface painted.

basic55®

WIRELESS			
white	62764-92-WL-507	2CKA006200A0254	1
alpine white	62764-94-WL-507	2CKA006200A0256	1
château-black	62764-95-WL-507	2CKA006200A0257	1

1) Surface painted.

Busch-art linear®

WIRELESS			
studio white	64764-44G-500	2CKA006800A3140	1
studio white, matt [1])	64764-44M-500	2CKA006800A3141	1
black matt [1])	64764-45M-500	2CKA006800A3143	1

1) Surface painted.

Busch-Watchdog 180 flex, wireless. Complete set with Comfort sensor multi-lens and relay insert
Consisting of Busch-Watchdog 180 flex comfort sensor with multi lens, 62764-84-WL-500.
Consisting of relay insert flex, 1gang, 64811 U-500.
Consisting of future® linear cover frame, 1gang 1721-184K-500.
Rated voltage: 230 V~
Rated frequency: 50 Hz. Inputs: 1
Outputs: 1x Normally open contact, potential-bound
Suitable for: 230 V- LEDi, typical., rated power: 300 VA.
Suitable for: 230 V incandescent lamps/230 V halogen lamps, rated power: 2300 W.
Suitable for: Low voltage halogen lamps that are operated via transformers, rated power: 2300 VA.
Detection range: frontal: 8 m, lateral: 7 m, mounting height: 1.1 m.
Detection range: frontal: 8 m, lateral: 8 m, mounting height: 2.2 m.
Detection angle: 180°.
Brightness limit value: 5 Lux - 500 Lux, up to daytime operation.
Mounting height: 0.8 m - 1.2 m, alternative: 2.2 m.
Temperature range (Device): -5 °C to 45 °C
Dimensions: (L x W x D): 80 mm x 80 mm x 57 mm
Mounting depth: 25 mm.

	Order details		Pack unit
	Type code	Order code	pc.
WIRELESS			
future® linear	62764 UJ-84-WL-500	2CKA006200A0264	1

ABB-flexTronics® wireless - compatible devices

Flush-mounted actuators and binary input

Switch Actuator 1gang, WL, 230V

NEW

Flush mounted actuator wireless for switching of lighting systems. Device control or networking of up to 32 devices (room control). Integration in ABB-free@home® wireless with System Access Point up to 150 devices. 3 wire connection (neutral conductor required). With plug clamps. With extension input. Operation also possible via conventional push buttons or switches. Remote operation via Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® Next App or the web interface of the System Access Point.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
Switch Actuator 1gang, WL, 230V	346433	62811 U-WL-500	2CKA006710A0034			1

Blind Actuator 1gang, WL, 230V

NEW

Flush mounted actuator wireless for the control of roller shutters, blind and awning motors with me-chanical or electronic limit switch shut-off. Device control or networking of up to 32 devices (room control). Integration in ABB-free@home® wireless with System Access Point up to 150 devices. 3 wire connection (neutral conductor required). With plug clamps. With extension input. Operation also possible via conventional push buttons or switches. Remote operation via Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® Next App or the web interface of the System Access Point.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
Blind Actuator 1gang, WL, 230V	346365	62831 U-WL-500	2CKA006710A0041			1

Switch Actuator 2gang, WL, 230V

NEW

Flush mounted actuator wireless for switching of lighting systems. Device control or networking of up to 32 devices (room control). Integration in ABB-free@home® wireless with System Access Point up to 150 devices. 3 wire connection (neutral conductor required). With plug clamps. With extension input. Operation also possible via conventional push buttons or switches. Remote operation via Bluetooth and smartphone/tablet app. Programming via Bluetooth with the ABB-free@home® Next App or the web interface of the System Access Point.

	Bbn 4011395	Order details		Price 1 piece	Weight 1 piece	Pack unit
	EAN	Type code	Order code		kg	pc.
WIRELESS						
Switch Actuator 2gang, WL, 230V Q4 / 25	363379	62821 U-WL-500	2CKA006710A0057			1

ABB-flexTronics® wireless - compatible devices

Flush-mounted actuators and binary input

Dimming Actuator 1gang, WL, 230V NEW

Flush mounted actuator wireless for switching and dimming of lighting systems.
Device control or networking of up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices. 2-wire connection (neutral conductor not required).
Neutral conductor optionally connectable (recommended for the connection of low loads < 3 W/VA). With plug clamps. With extension input.
Operation also possible via conventional push buttons or switches.
Remote operation via Bluetooth and smartphone/tablet app.
Programming via Bluetooth with the ABB-free@home® Next App or the web interface of the System Access Point.
Optimised for dimming of retrofit LED lamps (LEDi).
For dimmable Retrofit-LEDs (LEDi).
For dimmable Retrofit-LEDs (LEDi) with conventional or electronic transformers.
For incandescent lamps, 230 V tungsten halogen lamps, low-voltage halogen lamps with conventional or electronic transformers and dimmable energy-saving halogen lamps.
Mix operaton of LEDi with conventional loads possible.
With manually adjustable operating mode: trailing / leading edge control.
With adjustable minimum brightness.
Low-noise level by MOSFET transistors.
With electronic short-circuit protection.
With electronic overload protection.

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
Dimming Actuator 1gang, WL, 230V	62851 U-WL-500	2CKA006710A0038			1

Binary Input 6gang, WL, 230V NEW

Flush mounted binary input wireless. Conventional push-buttons or auxiliary contacts can be connected to 6 channels. The information of the contact enquiry can be used for activating ABB-free@home® and flexTronics wireless. Inputs can also be configured as outputs to control status LEDs.
The contact polling voltage (6V DC) is made available from the binary input itself. Extension of the connecting cables possible by a maximum of 10 m.
Operation in ABB-flexTronics® wireless networking of up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
Programming via Bluetooth with the ABB-free@home® Next App or the web interface of the System Access Point.

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
Binary Input 6gang, WL, 230V	62870/6.0 U-WL-500	2CKA006710A0043			

ABB-flexTronics® wireless - compatible devices

Smart Switches

Smart Switch, WL
Smarter light-/blind switch for wireless control of ABB-flexTronics® wireless and ABB-free@home® devices.
Wall-mounted transmitter, 2/4 channels.
Device control or networking of up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required.
Programming with the ABB-free@home® Next App. Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Combinable with the Busch-Jaeger switch range Busch-art linear®.

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
	62721/01 U-WL-500	2CKA006710A0052			1

Smart Switch, WL
“Smarter light-/blind switch for wireless control of ABB-flexTronics® wireless and ABB-free@home® devices.
Wall-mounted transmitter, 2/4 channels.
Device control or networking of up to 32 devices (room control).
Integration in ABB-free@home® wireless with System Access Point up to 150 devices.
At least one ABB-flexTronics® wireless device or an ABB-free@home® wireless device which serves as proxy device is required.
Programming with the ABB-free@home® Next App. Smartphone with NFC required.
Particularly environmentally friendly, sustainable and maintenance-free; Transmission energy is generat-ed when switching (energy harvesting).
Can be mounted freely in the room with the enclosed adhesive tape and fixing plate.
Including fixing plate for mounting on smooth walls or on switch boxes.

Combinable with the Busch-Jaeger switch ranges carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent® and future® linear.

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
	62721 U-WL-500	2CKA006710A0048			1

ABB-flexTronics® wireless - compatible devices

Smart Switches

Rocker 1gang, without printing NEW

As cover for Smart Switches.

Busch-art linear®

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
44G white	6735 BT-44G	2CKA001751A3413			1
44M white matt	6735 BT-44M	2CKA001751A3414			1
45M black matt	6735 BT-45M	2CKA001751A3416			1

Rocker 1gang, without printing NEW

As cover for Smart Switches.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
81 anthracite	6735 BT-81	2CKA006730A0142			1
82 ivory white	6735 BT-82	2CKA006730A0143			1
83 aluminium silver	6735 BT-83	2CKA006730A0144			1
84 studio white	6735 BT-84	2CKA006730A0145			1
866 stainless steel	6735 BT-866	2CKA006730A0148			1
884 studio white matt	6735 BT-884	2CKA006730A0149			1
885 black matt	6735 BT-885	2CKA006730A0150			1

ABB-flexTronics® wireless - compatible devices

Smart Switches

Rocker 2gang, without printing NEW

As cover for Smart Switches.

Busch-art linear®

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
44G white	6736 FoH-44G	2CKA006730A0166			1
44M white matt	6736 FoH-44M	2CKA006730A0167			1
45M black matt	6736 FoH-45M	2CKA006730A0169			1

Rocker 2gang, without printing NEW

As cover for Smart Switches.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
81 anthracite	6736 FoH-81	2CKA006730A0133			1
82 ivory white	6736 FoH-82	2CKA006730A0134			1
83 aluminium silver	6736 FoH-83	2CKA006730A0135			1
84 studio white	6736 FoH-84	2CKA006730A0136			1
866 stainless steel	6736 FoH-866	2CKA006730A0139			1
884 studio white matt	6736 FoH-884	2CKA006730A0140			1
885 black matt	6736 FoH-885	2CKA006730A0141			1

ABB-flexTronics® wireless - compatible devices

Smart Switches

Rocker 1gang, with “Blind” icon NEW

As cover for Smart Switches.

Busch-art linear®

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
44G white	6735-11-44G	2CKA006220A0993			1
44M white matt	6735-11-44M	2CKA006220A0994			1
45M black matt	6735-11-45M	2CKA006220A0996			1

Rocker 1gang, without printing NEW

As cover for Smart Switches.

future® linear, Busch-axcent®, solo®, pure stainless steel, carat®, Busch-dynasty®

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
WIRELESS					
81 anthracite	6735-11-81	2CKA006220A0985			1
82 ivory white	6735-11-82	2CKA006220A0986			1
83 aluminium silver	6735-11-83	2CKA006220A0987			1
84 studio white	6735-11-84	2CKA006220A0988			1
866 stainless steel	6735-11-866	2CKA006220A0990			1
884 studio white matt	6735-11-884	2CKA006220A0991			1
885 black matt	6735-11-885	2CKA006220A0992			1

ABB-flexTronics® wireless - compatible devices

Wireless RTC



Room temperature controller with 16A switch actuator wireless NEW

Use as a stand-alone controller or within the eco System of ABB free@home®
Heating/cooling operation. RTC control element with room temperature controller function.
6-button touch operation for local operating. Additional functions such as temperature adjustment and timer can be set via ABB free@home Next App.
With temperature display target value. With integrated switching actuator, e.g. for controlling thermoelectric actuators in heating/cooling systems or electric underfloor heating. RTR function is also available without prior programming (preconfigured).
The integrated RTR can optionally be equipped with a remote sensor in conjunction with temperature sensor 6226/T. 3-wire connection technology (neutral conductor required).
Programming/settings via the ABB-free@home® Next app
Device access via app is via Bluetooth or wireless
Communication with the free@home system is wireless.
Matching central disc: 1794 MDRT-xxx
Additional Remote Temperature Sensor: 6226/T
Control valves in the “normally closed” : TSA/K230.2.
Rated Voltage: 230 V AC
Rated Frequency: 50Hz
Output Voltage: 230 V AC
Rated Current: 16A (Relay)
Ambient Air Temperature: Operation -5 ... +45 °C
Protection class: IP20
Mounting depth: 29 mm
Dimensions: (L x W x D): 71 mm x 71 mm x 40 mm

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
	62841 U-WL-500	2CKA006800A3115			1

ABB-flexTronics® wireless - compatible devices

Wireless RTC



Room temperature controller / Sensor unit wireless **NEW**

Sensor Unit with integrated RTR usable within the free@home® eco system Heating/cooling mode. RTC control element with room temperature controller function.
6-button touch control for local operating. Additional functions such as temperature adjustment and timer can be set via app. With temperature display of set-point temperature RTR function is also available without prior programming (preconfigured).
The integrated RTR can optionally be equipped with a remote sensor in conjunction with temperature sensor 6226/T. 3-wire connection technology (neutral conductor required).
Programming/settings via the ABB-free@home® app next.
Device access via app is via Bluetooth or wireless Communication with the free@home system is wireless.
Matching central plate: 1794 MDRT-xxx
Additional Remote Temperature Sensor: 6226/T
Control valves in the “normally closed” : no
Rated Voltage: 230 V AC
Rated Frequency: 50Hz
Output Voltage: no
Rated Current: no
Ambient Air Temperature: Operation -5 ... +45 °C
Protection class: IP20
Mounting depth: 29 mm
Dimensions: (L x W x D): 71 mm x 71 mm x 40 mm

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
	62842 U-WL-500	2CKA006800A3117			1

ABB-flexTronics® wireless - compatible devices

Wireless RTC



Room temperature controller with electronic switch actuator wireless NEW

Room temperature controller with integrated actuator output.
Wireless connection and operating via free@home Next App. Use as a stand-alone controller or within the eco system with ABB-free@home® Heating/cooling operation.
Electronic-actuator output Control element with room temperature controller function.
6-button touch-operation for a local operation. Additional functions such as temperature adjustment and timer can be set via app. With temperature display target value.
With integrated switching actuator, e.g. for controlling thermoelectric actuators in heating/cooling systems or electric underfloor heating. RTR function is also available without prior programming (preconfigured). 3-wire connection technology (neutral conductor required).
Programming/settings via the ABB-free@home® Next App.
Device access via app is via Bluetooth or wireless Communication with the free@home system is wireless.
Matching central plate: 1794 MDRT-xxx
Additional Remote Temperature Sensor: no
Control valves in the “normally closed” : TSA/K230.2.
Rated Voltage: 230 V AC
Rated Frequency: 50Hz
Output Voltage: 230 V AC
Rated Current: 1A (MOSFET)
Ambient Air Temperature: Operation -5 ... +45 °C
Protection class: IP20
Mounting depth: 29 mm
Dimensions: (L x W x D): 71 mm x 71 mm x 40 mm

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
	62843 U-WL-500	2CKA006800A3119			1

ABB-flexTronics® wireless - compatible devices

Wireless RTC

Cover plates suitable for the new wireless RTC NEW

Central plate with print for room temperature controller with display/Bluetooth or free@home wireless.

carat®, Busch-dynasty®, pure stainless steel, solo®, Busch-axcent®

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
studio white	1794 MDRT-84-500	2CKA006430A0421			1

Busch-art linear®

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
studio white matt	1794 MDRT-44M	2CKA006430A0425			1
studio white	1794 MDRT-44G	2CKA006430A0426			1
black matt	1794 MDRT-45M	2CKA006430A0427			1

future® linear

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
black	64721-500	2CKA006430A0417			1
ivory white	1794 MDRT-82	2CKA006430A0418			1
aluminium silver	1794 MDRT-83	2CKA006430A0419			1
studio white	1794 MDRT-84-500	2CKA006430A0421			1
studio white matt	1794 MDRT-884	2CKA006430A0423			1
black matt	1794 MDRT-885	2CKA006430A0424			1

basic55®

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
white	1794 MDRT-92-507	2CKA006430A0414			1
alpine white	1794 MDRT-94-507	2CKA006430A0415			1
château-black	1794 MDRT-95-507	2CKA006430A0416			1

ABB-flexTronics® wireless - compatible devices

Weather station

Wireless weather station

For recording and transmitting of brightness, temperature, wind speed and rain.
Weather data can be linked with actuators to automatically control functions.
Weather data can be visualized in the free@home web interface and the free@home Next app.
Remote operation via the Bluetooth and smartphone/tablet app.

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
	WS-1-WL.1	2CKA006200A0297			1

Mast adapter weather station

	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
	WS-1/A1.1	2CKA006200A0848		0,110	1

ABB-flexTronics® wireless - compatible devices

Busch-Watchdog PRO

Busch-Watchdog PRO 280° WL
Wireless movement detector detecting thermal motion. Integrated switch actuator.
High-quality lens for optimum detection. Level balancing +/- 30° Ground and rear-field detection.
Additional switch-on via normally open push-button switch.
Potentiometer for the adjustment of standard parameters: Switch-on brightness,
Switch-off delay, Test-mode and short-term impulse.
Optional: ABB-free@home® Next app for commissioning of basic and add-on parameters.
Remote Bluetooth operation and smartphone/tablet app.
Integrated dismounting protection. Individual detection range adjustment via enclosed protective foil. Brightness-independent test mode.
Switch-off delay: 10 sec. to 30 min. or short-time pulse 1 sec. adjustable. Adjustment of standard parameters via app: Switch-on brightness, Switch-off delay, test-mode and short-term impulse.
Adjustment of add-on parameters via app: Detection sensitivity, PIR switch-off, takeover of the measured brightness level, permanent on, permanent off. Switch-off delay also programmable via app.
With optical indicator for detection and operation mode.
Automatic range stabilization.
Automatic interference suppression.
Automatic dazzle-proofing.
Surveillance density: 50 sectors with 200 switching segments.
Brightness limiting values: lux range 0.5–1000 or daytime mode.
Number of PIR: 1.

Color	Order details		Price 1 piece	Weight 1 piece	Pack unit
	Type code	Order code		kg	pc.
studio white	**6251/28-134-WL-500**	2CKA006200A0862			1
brown	**6251/28-131-WL-500**	2CKA006200A0858			1
aluminum silver	**6251/28-133-WL-500**	2CKA006200A0860			1
anthracite	**6251/28-135-WL-500**	2CKA006200A0864			1
stainless steel	**6251/28-136-WL-500**	2CKA006200A0866			1

DOOR ENTRY SYSTEM

Electrical installation solutions for buildings
Door entry system

Index

ABB-Welcome - Access all possibilities	2
Customized solutions	4
ABB-Welcome IP - Video outdoor stations - Comparison	13
ABB-Welcome - Outdoor stations	14
ABB-Welcome IP - Video outdoor stations - Comparison	16
ABB-Welcome - Video outdoor stations	17
According to your needs and wishes	19
ABB-Welcome - Outdoor station modules	21
ABB-Welcome/ABB-Welcome IP - Outdoor station modules	24
ABB-Welcome - Alternative modules	26
ABB-Welcome/ABB-Welcome IP - Frames and installation material	27
ABB-Welcome/ABB-Welcome IP - Installation material	28
ABB-Welcome - 2-wire indoor stations	31
ABB-Welcome - 2-wire video indoor stations	32
ABB-Welcome IP - Video indoor stations - comparision	37
ABB-Welcome IP - Video indoor stations	38
ABB-Welcome - System devices	43
ABB-Welcome/ABB-Welcome IP - Accessories	50
ABB-Welcome - Accessories	51
ABB-Welcome - Family home video kits	52

You may also visit our Door entry systems website:

Values & Benefits of our systems

Everyone deserve enjoying a smarter home and as ABB we simplify, make people's lives more comfortable and safer.

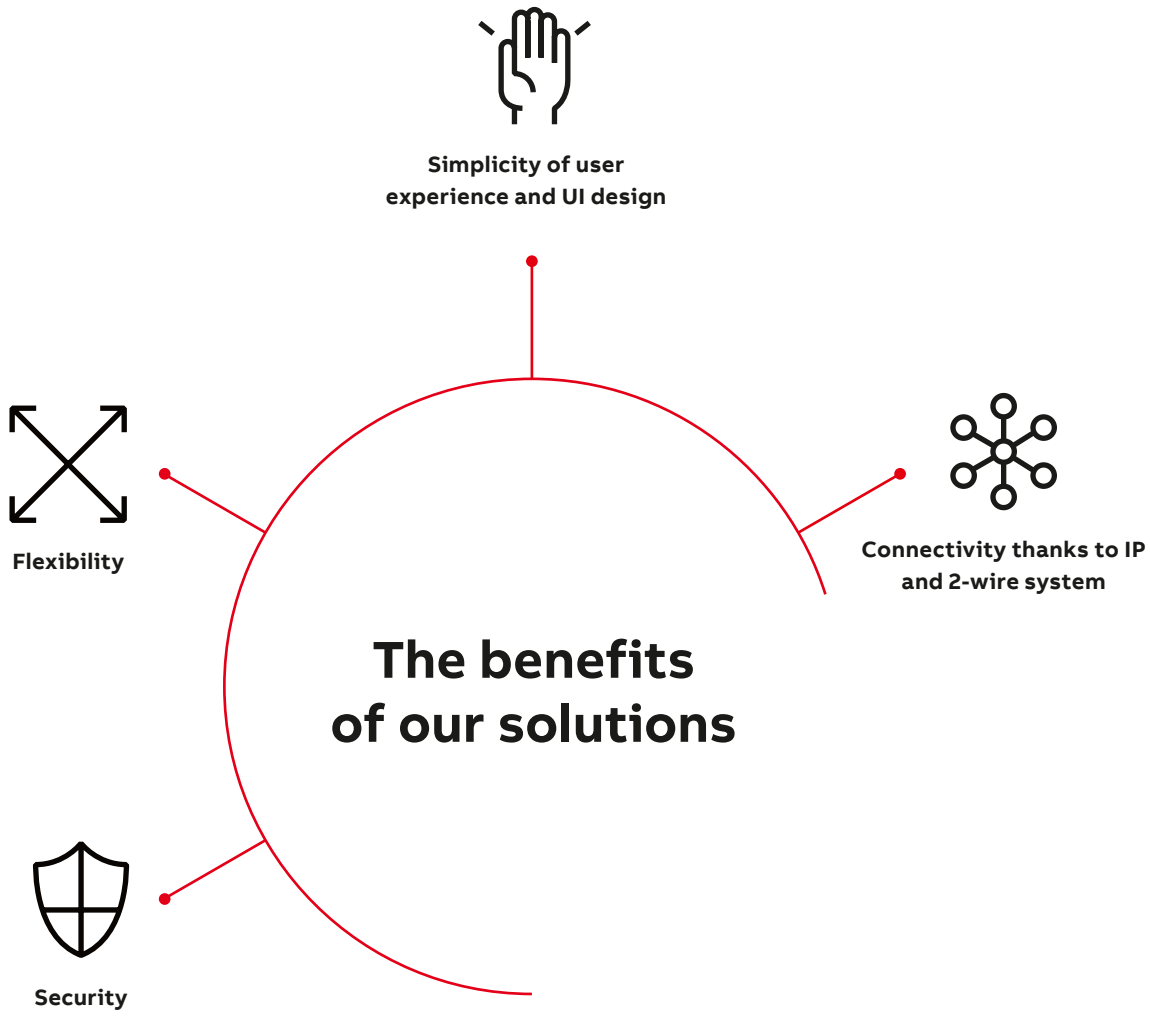

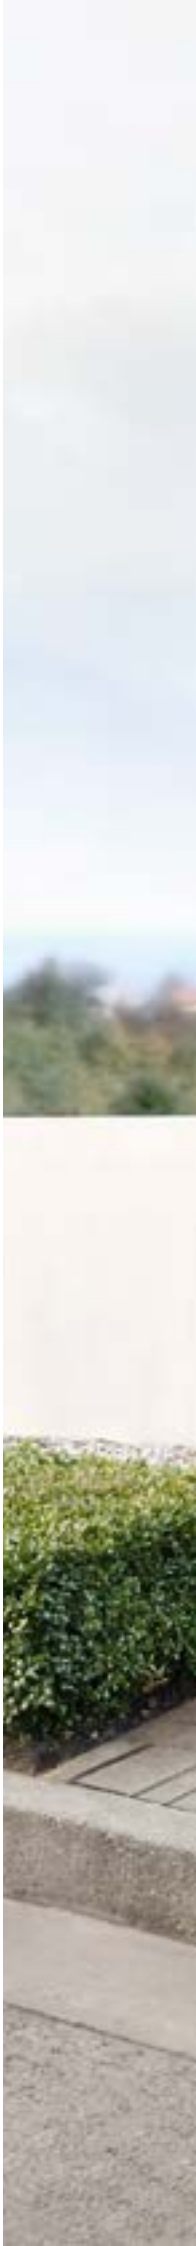

Security
Values & Benefits

Physical, concrete security

To make you safer and enjoy your own time, ABB combines all the security functions that keep you all day long with peace of mind. Both ABB- Welcome and ABB-Welcome IP provide secure control of your accesses, whether we are talking about gates, front doors or entrance doors.Thanks to door entry technology, and in particular IP HD technology, the residents of the house and building are always accessible to visitors with high-definition images transmitted from a multi-channel bandwidth. It is much more colourful, brighter, clearer and no interference in communication.

Cyber security

We believe that security and privacy are core values in our life. We want to protect you, at the same time giving you control over your home. In ABB-Welcome IP, we protected all the communications among all the devices and the cloud. At ABB we design the devices you use every day, whether it's for door entry, home automation or intrusion, to make this possible, integrating the most powerful technologies for your security.

MyBuildings portal:
Enterprise-grade cloud infrastructure is designed for uninterrupted operation and securely protects your communication and data … all for your home!

ABB Cyber Security Chip built into devices:
Dedicated unique certification into the chip encrypts all your passwords and data, enabling trusted communication to our portal and apps.

End-to-end encryption:
With the combination of built-in hardware security and end-to-end encryption, we make it extremely harder for any ill-intentioned to access your home.

ABB-Welcome
In ABB-Welcome all the communication from the panels toward the cloud use these technologies

ABB-Welcome IP
In ABB-Welcome IP, we protected all the communications among all the devices and the cloud.

Flexibility
Values & Benefits

Customized solutions for complete building automation, in commercial, public, and privately used buildings.

Buildings application

The combination of the 2-wire and IP system makes ABB's proposal wide and varied enough to satisfy every type of residence for every door entry and access control needs.

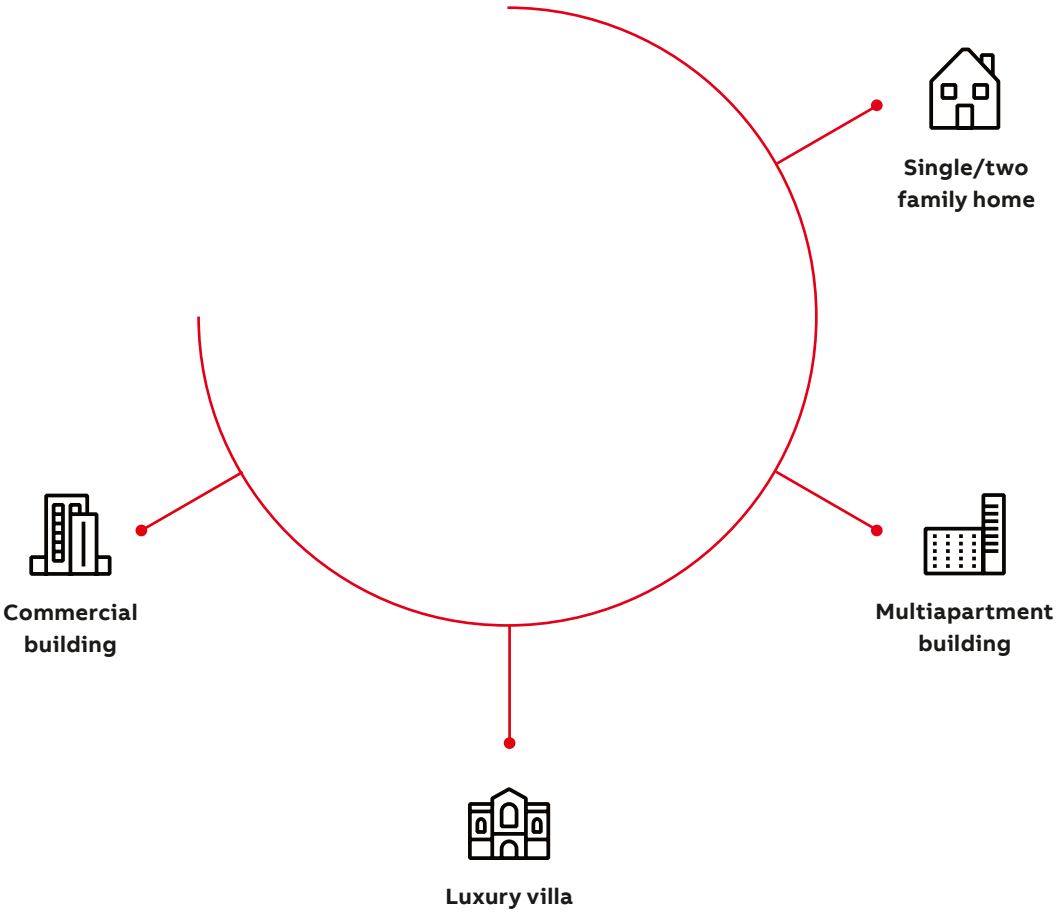

Modularity

Module design with infinite possibilities. Our customers' requirements vary from the most basic to the complex. With functional modules, ABB-Welcome provides the answer for all these needs. For all types of new construction many combinations of outdoor stations are possible to create the desired solution according to the requirements of the builder, architect, installer and the aesthetic taste of the owner. With this approach the modular outdoor station fits all type of buildings.

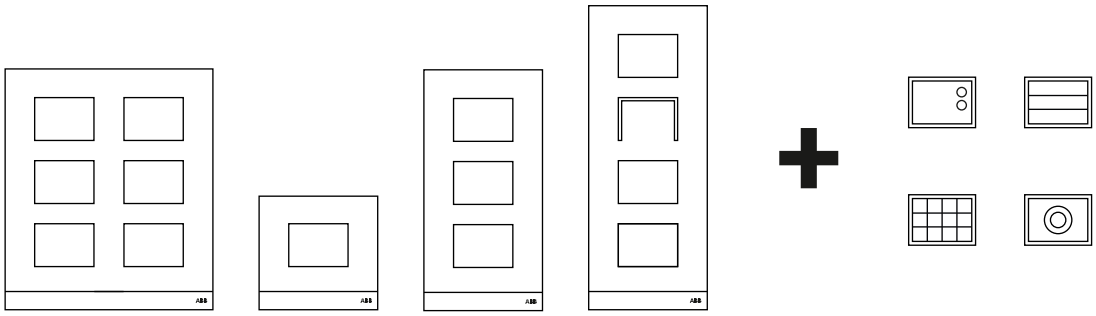

Simplicity
Values & Benefits

The real genius of this highly sophisticated system that can help users to easy set up their own solution. Also the smart UI design that can make users feel ease of use even this is their first time to manipulate the system.

Installing & commissioning simplicity

Setting up your ABB-Welcome system is very simple: the 2-wire technology allows ease of installation also in case of renovation and even advanced functionalities like WiFi connectivity to the mobile app can be set through just the scaning of a QR code.

Also the IP technology becomes easy: wireless and PoE connection make the system really easy to install. For the commissioning quickly create the building structure and scan the QR code of a device to place into the desired location, upload the information into devices. 1-2-3, Done!

User interface

ABB always takes pride in user experience and innovates common network technology to create a totally smarter solution that can perfectly meet your every need. Main menu with easy settings for door communication, video surveillance and home automation.

The new interface ensures that comprehensive functions in a room or entire building are centrally visualized, easy and intuitively operated in a comfortable and efficient manner.

Connectivity
Values & Benefits

No matter where you are, your home is always be connected with your app or smart home ecosystem. Every area of the house can be remotely controlled. This helps users to get access to system from everywhere.

APP

You can answer and open the door remotly via the ABB-Welcome App. The App is a cloud based integrated platform working with both iOS and Android. It allows you to use your smart phone or tablet managing the calls from IP Touch panel, 4.3" series WiFi, from all other 2-wire panel with the IP gateway, digital cylinder and surveillance locally or remotely.You can also set up your customized App with as many steps as you wish.

Thanks to MyBuildings portal, the remote connection is totally automated and managed with the highest level of security and data privacy. No special settings need to be made on the internet router for this solution.

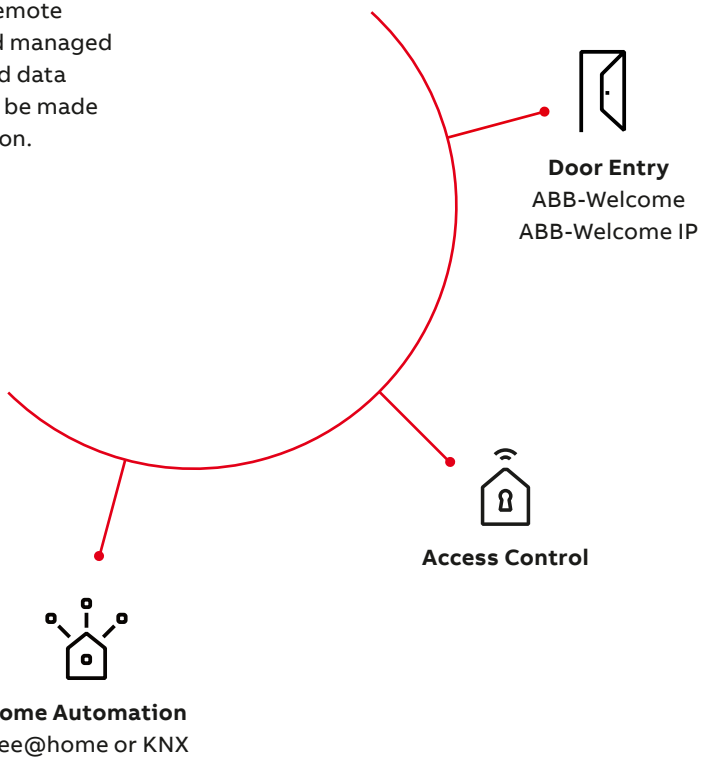

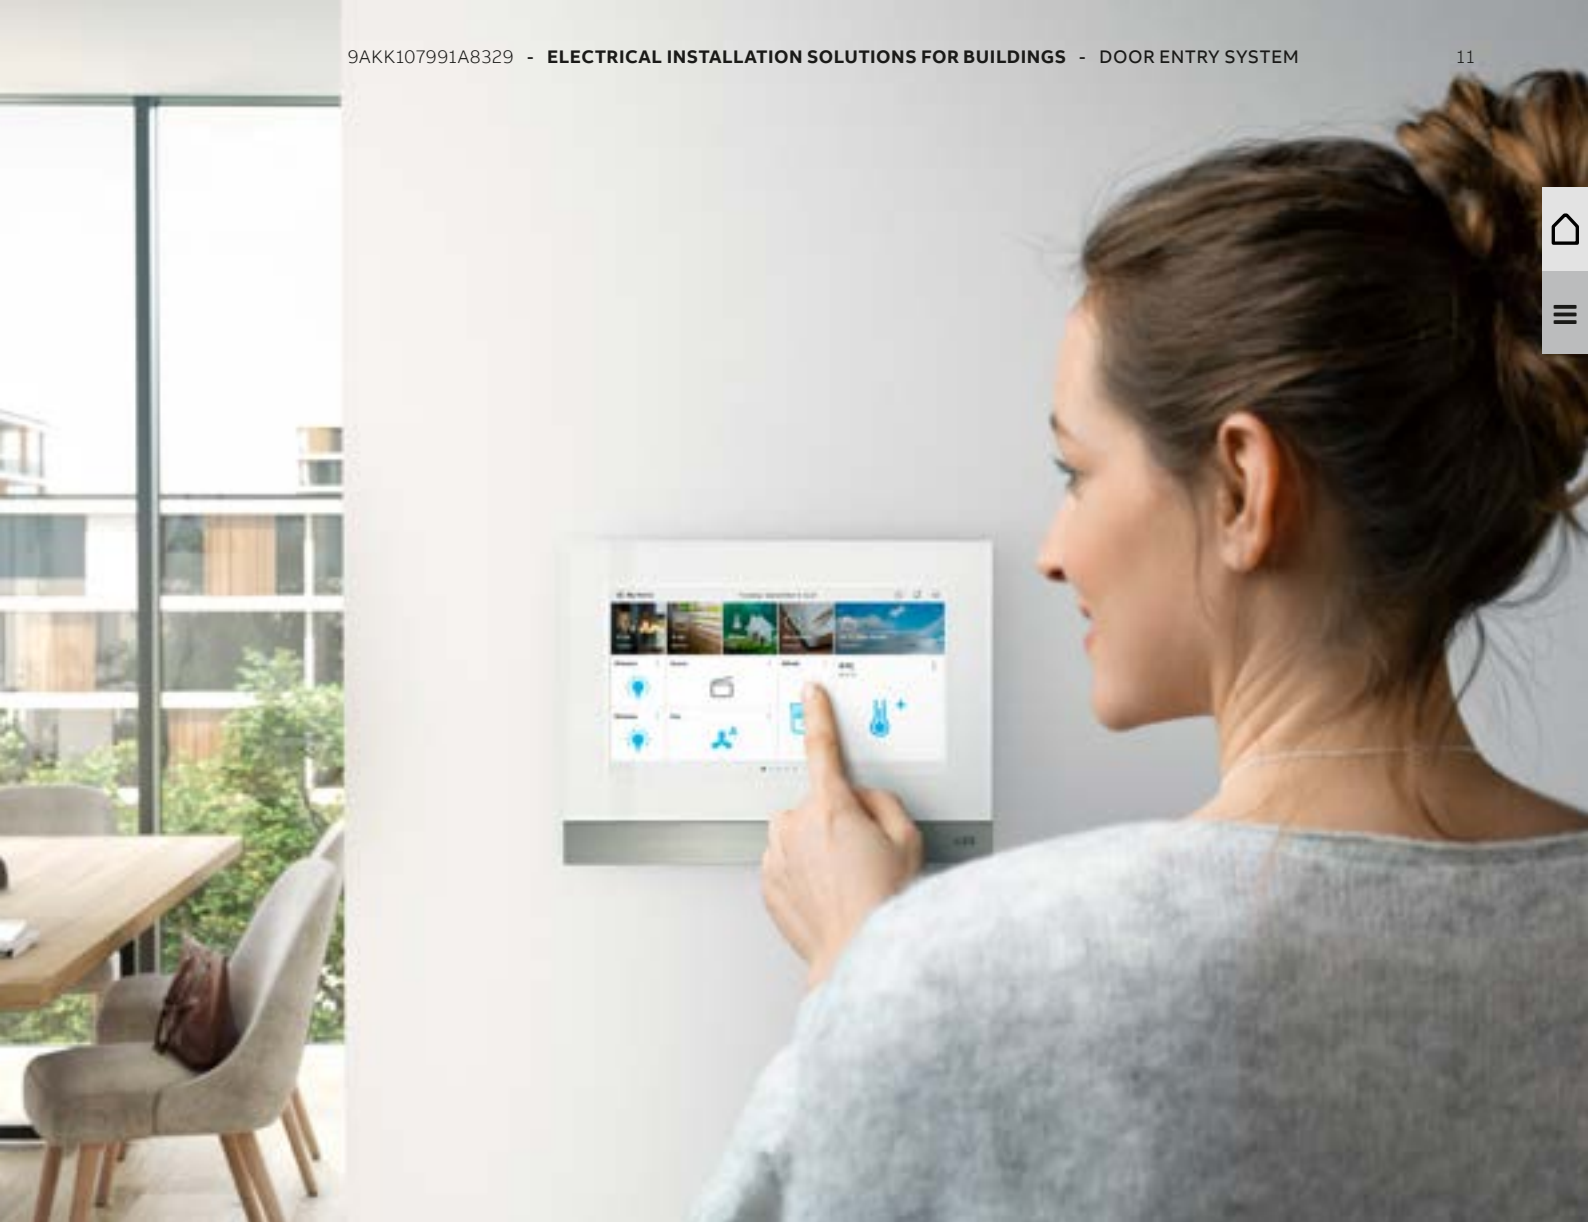

Smart home ecosystem

Imagine the very best in comfort, security, design and energy efficiency for tomorrow's smart home, today. ABB can bring this to any residential building more easily than ever. All the functions that can be controlled such as blinds, lighting, heating, air-conditioning, door communication, access control and security are designed to make life simpler and smarter. Controlling the heart of the home or answering to your doorbell can be done at the touch of a panel, from the comfort of your armchair or remotely.

Access all possibilities

		Welcome IP				Welcome		
Cabling								
Main Applications		Single/two family home	Luxury villa	Multi dwelling	Commercial building	Single/two family home	Luxury villa	Multi dwelling
System size	Max number of units per building	Up to 2000				Up to 250		
	Max number of outdoor stations per building	64				9		
	Max wiring distance from outdoor station to indoor station	No limitation				600 m		
Video quality		HD				Standard		
Smart Home		●				●		
Connectivity	Remote door call on mobile APP	●				●		
	Software updates	●				○ Select connected devices		
	Remote maintenance	●						
Integrations	Open communication protocols	● SIP Protocol for select devices						
	APIs	● Local and Cloud						
	Cameras	● ONVIF Protocol				○ Analog		

Door entry system

ABB-Welcome - Video outdoor stations - Comparison

	Keypad series	**Mini series**	**Modular audio/video OS**
Type	Monoblock	Monoblock	Modular
Recommended application	Multi apartment building	Single/two family home	Flexible all type of buildings
Audio only		●	
Video	550 TV Lines Effective Pixels: 1292 (H) x 968 (V)	600 TV lines Effective pixels: 1297 (H) x 977 (V)	550 TV Lines Effective Pixels: 1292 (H) x 968 (V)
Detection angles	Horizontal: 100 °Vertical: 70° Diagonal: 130°	Horizontal: 111° Vertical: 73° Diagonal: 130°	Horizontal: 100 °Vertical: 70° Diagonal: 130°
Weather protection	IP54	IP54	IP54
Impact protection	IK07	IK07	IK07
User interface	Keypad	Keypad or pushbotton	Keypad
Flush Mounting	●	●	●
Surface Mounting	●	●	●
Maximum number of IS	No limits	2	80
Door opening by transponder	●	●	●
Keypad opening	●	●	●

2-wire video outdoor station

ABB-Welcome - Outdoor stations

Shared features:

- Type of installation: SM or FM
- IP54: dustproof & watreproof
- IK07: vandal proof

Keypad series

Video outdoor station with A/V module, display module & keypad module. One lock can be directly connected without independent power supply for the lock and additional terminal for second lock is available.

- Anti-fog design with built-in heater for clear images also in wet conditions
- Built-in infrared lighting for clear images at night and hidden surveillance from video indoor station and integrated optic sensor for day/night mode
- LED indicator for real-time status
- Opening of the door by DESFire or IC card. Support to establish the call by enter room number or by searching name through display and support to open the door by entering correct password through keypad module
- Easy to set default lock by one dip-switch
- Lock release time and speaker volume are adjustable
- Enable/disable outdoor station's acoustic feedback when pressing button
- Support local power supply (20-30 V DC)
- Support to release the default lock by pressing local exit button
- Wiegand output available, support 26 bits (default) and 34 bits
- Dimensions: 349 x 135 x 29 mm / 13.7 x 5.3 x 1.1 inch

Version	Aluminum, with ID card	Aluminum, with IC card
Article no.	M21381K-A	M21382K-A
Order no.	2TMA210010A0051	2TMA210010A0053

Mini series

Outdoor station-aluminum, up to 2 lock connections.

- Compact size
- Integrated status display
- Light switch or calling guard programmable for the 2nd button
- Dimensions (SM): 168 x 99 x 26,5 mm / 6.6 x 3.9 x 1 inch
- Dimensions (FM): 180 x 105 x 43 mm / 7 x 4.1 x 1.7 inch

		Article no.	Order no.	EU (excluding DACH)	USA, other (excluding CN)
1 button	ID card reader - SM	M21312P1-A	2TMA070010A0018		●
		M21312P1-A-02	2TMA210010A0032	●	
	ID card reader - FM	M21362P1-A	2TMA210010A0039		●
		M21362P1-A-02	2TMA210010A0041	●	
	No ID card reader - SM	M21311P1-A	2TMA070010A0016		●
		M21311P1-A-02	2TMA210010A0030	●	
2 buttons	ID card reader - SM	M21312P2-A	2TMA070010A0019		●
		M21312P2-A-02	2TMA210010A0033	●	
	ID card reader - FM	M21362P2-A	2TMA210010A0040		●
		M21362P2-A-02	2TMA210010A0042	●	
	No ID card reader - SM	M21311P2-A	2TMA070010A0017		●
		M21311P2-A-02	2TMA210010A0031	●	
With FM version is optional the Pre-installation box					
Dimensions: 6.8 x 3.8 x 1.8 inch		41361F	2TMA110010N0001		●
Dimensions: 174 x 98 x 45 mm		41361F-02	2TMA210160B0006	●	

Standalone

ABB-Welcome - Outdoor stations

Standalone outdor station:
Standalone access control outdoor station.
These can be use with Welcome 2-wire.

Common technical details:
- Dimensions: 139 x 135 x 29 mm / 5.5 x 5.3 x 1.1 inch
- Type of installation: SM or FM
- Rating current: 24 V DC, 25 mA
- Operating temperature: -40 °C...+55 °C
- Dustproof and watreproof: IP54
- Vandal proof: IK07
- Single-wire/fine-wire clamps: 2 x 0.28 mm²...2 x 0.75 mm²
- Connects to ABB-Welcome door communication by 2-wire cable

Standalone keypad module:
- Enables the opening of the door using a numerical code
- 1800 passwords can be taught in
- Enable control switch actuator with lights connected
- Standalone operation together with system controller (power supply) and switch actuator (security connection for the electrical door opener or light)
- Programming directly on the module
- Mounting tool is enclosed

Version	Stainless steel ■
Article no.	M2700KP-S
Order no.	2TMA200160X0005

Standalone transponder module:
- Enables the opening of the door using a key card
- 1800 users can be taught in
- Standalone operation together with system controller (power supply) and switch actuator (security connection for the electrical door opener)
- Programming directly on the module or using PC management software (requires 2-wire adaptor M2308)
- Mounting tool is enclosed

Version	Stainless steel ■
Article no.	M2700TP-S
Order no.	2TMA200010X0001

Standalone keypad module:
- Enables the opening of the door using a fingerprint scanner
- 64 users can be taught in
- Standalone operation together with system controller (power supply) and switch actuator (security connection for the electrical door opener)
- Programming directly on the module or using PC management software (requires 2-wire adaptor M2308)
- Mounting tool is enclosed

Version	Stainless steel ■
Article no.	M2700FP-S
Order no.	2TMA200160X0007

Door entry system

ABB-Welcome IP - Video outdoor stations - Comparison

	Video OS touch 5"	Video Keypad OS	Video pushbutton OS	Mini OS	Modular video OS
Type	**Monoblock**	**Monoblock**	**Monoblock**	**Monoblock**	**Modular**
Recommended application	Commercial building Multi apartment building Luxury villa	Commercial building Multi apartment building Single/two family home	Luxury villa Single/two family home	Multi apartment building* Single/two family home	Flexible all type of buildings
Video	HD 720p	HD 720p	HD 720p	SD 480p	HD 720p
Detection angles	Horizontal: 111° Vertical: 73° Diagonal: 130°	Horizontal: 111° Vertical: 73° Diagonal: 130°	Horizontal: 111° Vertical: 73° Diagonal: 130°	Horizontal: 86° Vertical: 73° Diagonal: 104°	Horizontal: 111° Vertical: 73° Diagonal: 130°
Weather protection	IP54	IP54	IP54	IP54	IP54
Impact protection	IK07	IK07	IK07	IK07	IK07
User interface	Touch	Or Keypad or pushbotton	Pushbutton	Pushbutton	Pushbutton
Flush Mounting	●	●	●	●	●
Surface Mounting	●	●	●	●	●
Maximum number of IS	No limits	No limits	3	2	80
Door opening by transponder	●	●	●	●	●
Keypad opening	●	●	●		
Speech synthesiser	●	●	●	●	●

* Used as apartment outdoor station in combination with the main building outdoor stations.

IP video outdoor station

ABB-Welcome IP - Video outdoor stations

Shared features:

- Type of installation: SM or FM
- IP54: dustproof & waterproof
- IK07: vandal proof
- Super anti-fog coating and built-in heater
- LED indicator for real-time status
- Integrated RFID Reader (MIFARE® DESFire® EV1 & EV2) for door opening

Touch 5" series

Video outdoor station with 5-inch touch screen, integrated with transponder and keypad. Serves as end device for the communication with IP touch panel, guard unit or property management.

- Intuitive operable touchscreen & virtual keypad integrated
- Advertising or Developer promotion display area
- Name list / logo / physical address / logical address calling type
- Wiegand output available
- HD video streaming (720p) with 130-degree angle
- Dimensions: 349 x 135 x 29 mm / 13.7 x 5.3 x 1.1 inch

Version	Brushed stainless steel ■	White ■
Article no.	H81381T-S	H81381T-W
Order no.	2TMA130010X0009	2TMA130010W0013

Pushbutton series

Video outdoor station with transponder and pushbutton(s) serves as end device for the communication with IP touch panel, guard unit or property management.

- Bar and around pushbutton for optional
- Pushbutton could be programmed as you want (switch on lighting, call indoor station or guard unit)
- Bright back-lit ensures clear nameplate at nighttime
- HD video streaming (720P) with 130-degree angle
- Dimensions (SM): 277 x 135 x 29 mm / 11 x 5.3 x 1.1 inch

Version	Brushed stainless steel ■	1 pushbutton	2 pushbuttons	3 pushbuttons
Article no.		H81381P1-S	H81381P2-S	H81381P3-S
Order no.		2TMA130010X0001	2TMA130010X0002	2TMA130010X0003
Version	**White ■**	**1 pushbutton**	**2 pushbuttons**	**3 pushbuttons**
Article no.		H81381P1-W	H81381P2-W	H81381P3-W
Order no.		2TMA130010W0021	2TMA130010W0025	2TMA130010W0029

IP video outdoor station

ABB-Welcome IP - Video outdoor stations

Keypad series

Video outdoor station with display, transponder and keypad serves as end device for the communication with IP touch panel, guard unit or property management.

- Physical address / logical address calling type
- Wiegand output available
- HD video streaming (720P) with 130-degree angle
- Dimensions: 349 x 135 x 29 mm / 13.7 x 5.3 x 1.1 inch

Version	**Brushed stainless steel** ■	**with ID**	**with IC**
Article no.		H81383K-S	H81384K-S
Order no.		2TMA130010X0037	2TMA130010X0038
Version	**White** □	**with ID**	**with IC**
Article no.		H81381K-W	H81382K-W
Order no.		2TMA130010W0033	2TMA130010W0037

Mini series with card reader

Aluminum alloy, up to 2 locks connections.

- Compact size
- Integrated status display and optionally with MIFARE (DESFire EV1) card reader
- Light switch or calling guard programmable for the 2nd button
- Camera resolution: 640 x 480 px
- Dimensions (SM): 168 x 99 x 26,5 mm / 6.6 x 3.9 x 1 inch
- Dimensions (FM): 180 x 105 x 43 mm / 7 x 4.1 x 1.7 inch

Version	**SM**	**1 pushbutton, with card reader**	**2 pushbuttons, with card reader**
Article no.		H81316P1-A	H81316P2-A
Order no.		2TMA130011A0003	2TMA130011A0004
Version	**FM**	**1 pushbutton, with card reader**	**2 pushbuttons, with card reader**
Article no.		H81366P1-A	H81366P2-A
Order no.		2TMA130011A0005	2TMA130011A0006

Create your own outdoor station

According to your needs and wishes

Flush-mounted solution (FM)

Pre- installation box
(optional)

FM box
3

Moduls
2

Frame
1

FM Rain Hood
(optional)

Surface-mounted first generation (SM)

SM box
3

Moduls
2

Frame
1

Weather Cover

Surface-mounted second generation (SM)

SM box
3

Moduls
2

Frame
1

SM Rain Hood
(optional)

Audio-video modules

Installation details for first & second generations

First generation audio-video modules	Flush-Mounted	Surface-Mounted	LOCK-GND	NO-NC-COM
Camera Module	●	+Weather Cover		
Audio Module	●	+Weather Cover	●	●
Audio Module (1 button)	●	+Weather Cover	●	●
Audio Module (2 buttons)	●	+Weather Cover	●	●

Second generation audio-video modules	Flush-Mounted	Surface-Mounted	LOCK-GND	NO-NC-COM
Audio/Video Module 130	●	●	●	●
Audio Module 2nd gener.	●	●	●	

2-wire modules

ABB-Welcome - Outdoor station modules

2-wire modules:
These modules can be used with Welcome 2- wire.

Audio modules - 1st generation (primary module)
The primary module establishes communication with the system control center by a 2-wire connection. Each outdoor station always requires one primary module.

- 3 LED indicators for operation status indications: call established / system busy, communication possible and door unlocked
- One lock can be directly connected without independent power supply for the lock
- Addictional terminal for second lock is available
- Lock release time and speaker volume are adjustable
- On button versions: different mode setting is possible such as 1 call or 2 calls in one row, call guard or switching light for the first or second button.
- Integrated optica sensor for day / night mode
- Dimensions: 97 x 72 x 38 mm / 3.8 x 2.8 x 1.5 inch
- Type of installation: SM (only with new weather covers) or FM

Version	No button	Order no.	EU	Non EU
No Button	M251021A-A-02	2TMA210010A0001	●	
	M251021A-A	2TMA070150A0002		●
1 Button	M251022A-A-02	2TMA210010A0002	●	
	M251022A-A	2TMA070150A0003		●
2 Button	M251023A-A-02	2TMA210010A0003	●	
	M251023A-A	2TMA070150A0004		●

Camera modules - 1st generation

- Video color camera with large detection angle (H 86°, V 67°, D 104°) and manually mechanical adjustment (H ± 15° ,V ± 15°), built-in infrared lighting ensures clear picture and comfortable to eyes at night and hidden surveillance from video indoor station
- Optional to connect one additional analog camera for surveillance inside the video indoor station
- Dimensions: 97 x 72 x 41 mm / 3.8 x 2.8 x 1.6 inch
- Type of installation: SM (with weather covers 4102.WC-A) or FM

	Article no.	Order no.	EU (excluding DACH)	USA, other (excluding CN)
	M251021C	2TMA070150N0038		●
	M251021C-02	2TMA210010N0001	●	

Fingerprint module
Fingerprint module is one access control module of video/audio outdoor station

- Enables the opening of the door using a finger scanner
- 64 users can be taught in
- Programming directly on the module or using PC management software (requires 2-wire adaptor M2308)
- Rating current: 24 V DC, 40 mA
- Dimensions: 97 x 72 x 28 mm / 3.8 x 2.8 x 1.1 Inch
- Type of installation: SM or FM
- Operating temperature: -40 °C...+55 °C

Version	White	Stainless steel	Aluminum
Article no.	51381FP-W	51381FP-S	51381FP-A
Order no.	2TMA200160W0004	2TMA200160X0003	2TMA200160A0025

2-wire modules

ABB-Welcome - Outdoor station modules

2-wire primary modules

The primary module establishes communication with the system control center by a 2-wire connection. Each outdoor station always requires one primary module.

Common technical details:

- LED indicators for operation status indications: call established / system busy, communication possible and door unlocked
- Support to release the lock by pressing local exit button
- Operating temperature: -40 °C...+55 °C
- Single-wire/fine-wire clamps: 2 x 0.28 mm^2...2 x 0.75 mm^2
- Connects to ABB-Welcome door communication by 2-wire cable

Audio module - 2nd generation

Audio module is compulsory for audio outdoor station composition

- Enable/disable outdoor station's acoustic feedback when pressing button
- Manage the working mode and functionality of pushbutton outdoor station
- Operating current: 24 V DC, 120 mA
- Standby current: 24 V DC, 8 mA
- Dimensions: 97 x 72 x 28 mm / 3.8 x 2.8 x 1.1 Inch
- Type of installation: SM or FM

Article no.	M251381A-A
Order no.	2TMA200160A0001

Audio/video module - 2nd generation

Audio/video module is the heart of video outdoor station

- Built-in infrared lighting ensures clear picture and comfortable to eyes at night and hidden surveillance from video indoor station.
- Anti-fog design with built-in heater ensures clear image even in wet conditions.
- One lock can be directly connected without independent power supply for the lock.
- Additional terminal for second lock is available.
- Easy to set default lock by one dip-switch
- Lock release time and speaker volume are adjustable.
- Integrated optic sensor for day / night mode.
- Enable/disable outdoor station's acoustic feedback when pressing button
- Manage the working mode and functionality of pushbutton outdoor station
- Induction loop functionality is possible on Article M251382M when assembeing with stainless steel frame
- Dimensions: 143 x 72 x 28 mm / 5.6 x 2.8 x 1.1 inch
- Operating current: 24 V DC, 200-230 mA
- Standby current: 24 V DC, 60 mA
- Image sensor: CMOS sensor 1/3.2"
- Resolution: 550 TV lines, effective pixels 1297 (H) x 977 (V)
- Detection angle: H 100°, V 70°, D 130°
- Camera Standard :PAL/NTSC
- Floating output for door opener (COM -NC - NO): 30 V AC/DC, 1 A

Version	Standard	T-loop with speech synthesis
Article no.	M251381M	M251382M
Order no.	2TMA200160N0043	2TMA200160N0044

IP modules

ABB-Welcome - Outdoor station modules

IP modules:
These modules can be used only with Welcome-IP.

Common technical details:
- Dimensions: 143 x 96 x 23 mm/ 5.6 x 3.8 x 0.9 inch
- Type of installation: SM or FM

A/V module with 720P camera, Lan cable
Audio & video modules as the heart of outdoor station
- HD video streaming (720P) with 130 degree angle
- Super anti-fog coating and in-built heater
- LED indicater for real-time status
- Suitable for the disabled

Article no.	H851381M-S
Order no.	2TMA130160B0081

Big display module
Integrated with transponder and keypad serves as big touch screen fro daily operation for residential owners and visitors
- Intuitive operable touchscreen & Virtual keypad integrated
- Advertising or Developer promotion display area
- Name list / logo / physical address / logical address calling type
- Opeing of the door by DESFire or NFC or IC card

Version	**5 inch & IC/DESfire**
Article no.	H851381DP
Order no.	2TMA130160B0082

Standard modules

ABB-Welcome/ABB-Welcome IP - Outdoor station modules

Functional modules:
These modules can be used with both Welcome 2- wire and Welcome-IP.

Common technical details:
- Dimensions: 97 x 72 x 25 mm/ 3.8 x 2.8 x 1 inch
- Type of installation: SM or FM
- Operating temperature: -40 °C...+55 °C

Round pushbutton
1/2/3 pushbutton for visitor to press for calling
- Pushbutton could be programmed as you want (switch on lighting, call indoor station or guard unit)
- Bright back-lit ensures clear nameplate at night time
- Opening of the door by DESFire or NFC or IC card
- Rating current: 24 V DC, 10 mA/ for NFC version 24 V DC, 40 mA

Version	1 button	2 buttons	3 buttons
Article no.	51381RP1	51381RP2	51381RP3
Order no.	2TMA130160N0003	2TMA130160N0004	2TMA130160N0005
Version	**1 button with NFC/IC**	**2 buttons with NFC/IC**	**3 buttons with NFC/IC**
Article no.	51382RP1	51382RP2	51382RP3
Order no.	2TMA130160N0006	2TMA130160N0007	2TMA130160N0008

Bar push button module
3/6 or 4/8 pushbutton for visitor to press for calling
- Pushbutton could be programmed as one column or double columns
- Bright back-lit ensures clear nameplate at night time
- Rating current: 24 V DC, 8 mA

Version	3 bar buttons	4 bar buttons
Article no.	51381SP3	51381SP4
Order no.	2TMA130160N0001	2TMA130160N0002

Keypad with 1abc input
Digital inputing module for keyoad outdoor station
- Enable the opening of the door using a numerical code
- 3,000 customized passwords can be taught in
- Backlight automatically on for visibility at night
- Call guard unit is available
- Rating current: 24 V DC, 20 mA

Version	White	Stainless steel	Aluminum
Article no.	51381K-W	51381K-S	51381K-A
Order no.	2TMA130010W0014	2TMA130160X0001	2TMA210160A0009

Standard modules

ABB-Welcome/ABB-Welcome IP - Outdoor station modules

Display

The display module ensures that the personalised message, code and number can be read

- Physical address / logical address calling type
- Up to 5000 pcs cards can be registrered
- Opening of the door by DESFire or NFC or IC card
- Wiegand output available
- Rating current: 24 V DC, 160 mA

Version	ID Card	IC/DES fire card
Article no.	51381CR	51382CR
Order no.	2TMA130160N0010	2TMA130160N0009



Info module

Info module is used to hold the address of the building or the resident directory and assembled in outdoor station

- Stamped labelling foil is enclosed
- Backlight ensures clear visibility at night
- Rating current: 24 V DC, 8 mA

Article no.	51381DN
Order no.	2TMA200160N0039

Dummy module

Dummy module is one blank module, support to put 3rd-party module inside, also support to future function module replacement

- Maximum space inside 54.5 x 9.4 x 74 mm / 21.5 x 0.37 x 2.9 inch

Article no.	51381DM
Order no.	2TMA200160N0040

Letter box modules

ABB-Welcome - Alternative modules

Letter box modules:
For the integration into letter boxes and bell systems of different manufacturers.

Camera module
- The cutout must be created by the manufacturer
- Extended audio module assembly with video function
- Video camera with automatic day/night switchover and infrared LEDs to illuminate the night shots
- Installed heating to keep the lens free of condensation
- Vertical/horizontal detection angle: 86°/67°
- Setting angle horizontal/vertical: +/-15°, mechanically adjustable
- Dimensions: 126 x 68 x 31 mm / 5 x 2.7 x 1.2 inch

Version	EU	Non EU
Article no.	83501-101-500-01	83501-101-500-02
Order no.	2TMA070150N0043	2TMA210010N0039

Audio integration unit
- Makes audio communication possible with also adjustable volume
- Built-in relay for operating the door opener
- 8 inputs for connecting the doorbell push-switches
- With interface for the connection of built-in keypad extensions and of the camera module
- Dimensions: 68 x 126 x 31 mm / 2.7 x 5 x 1.2 inch

Version	EU	Non EU
Article no.	83110-500-02	83110-500-01
Order no.	2TMA210010N0037	2TMA070150N0042

Extension unit
- Extends the built/in audio module assembly by a further 12 binary inputs
- The built-in audio module can be extended to a maximum of 99 inputs for doorbell push-switches with the aid of the built-in keypad extension
- With interface for the connection of built-in keypad extensions
- Dimensions: 68 x 50 x 24 mm / 2.7 x 2 x 0.9 inch

Version	EU	Non EU
Article no.	83111-500-02	83111-500-01
Order no.	2TMA210010N0038	2TMA070120N0027

Door entry system

ABB-Welcome/ABB-Welcome IP - Frames and installation material

2 types of outdoor station frame:

Audio outdoor station frame
Suitable for audio/video modules of 1st generation

Video outdoor station frame
Suitable for audio/video modules of 2nd generation

Columns	Modules	Type of frame	Color	Article no	Order no.	Dimensions
1	1	Audio	Aluminum	41391CF-A	2TMA220160A0003	119 x 135 x 20 mm 4.6 x 5.3 x 0.8 inch
1	2	Audio	Aluminum	41392CF-A	2TMA200160A0011	205 x 135 x 20 mm 8.1 x 5.3 x 0.8 inch
		Audio	Anthracite	41392CF-B	2TMA220161B1001	
1	3	Audio ●	Stainless steel	41393CF-S	2TMA130160X0060	277 x 135 x 20 mm 10.9 x 5.3 x 0.8 inch
		Audio ●	Aluminum	41393CF-A	2TMA200160A0013	
		Audio	Anthracite	41393CF-B	2TMA220161B1002	
		Video	White	41383CF-W	2TMA130160W0002	
		Video	Stainless steel	41383CF-S	2TMA130160X0004	
		Video	Aluminum	41383CF-A	2TMA200160A0003	
		Video	Anthracite	41383CF-B	2TMA220161B1004	
1	4	Audio ●	Stainless steel	41394CF-S	2TMA130160X0064	349 x 135 x 20 mm 13.7 x 5.3 x 0.8 inch
		Audio ●	Aluminum	41394CF-A	2TMA200160A0015	
		Audio	Anthracite	41394CF-B	2TMA220161B1003	
		Video	White	41384CF-W	2TMA130160W0003	
		Video	Stainless steel	41384CF-S	2TMA130160X0005	
		Video	Aluminum	41384CF-A	2TMA200160A0005	
		Video	Anthracite	41384CF-B	2TMA220161B1005	
1	5	Audio	Aluminum	41395CF-A	2TMA200160A0017	421 x 135 x 20 mm 16.6 x 5.3 x 0.8 inch
		Video	White	41385CF-W	2TMA130160W0004	
		Video	Stainless steel	41385CF-S	2TMA130160X0006	
		Video	Aluminum	41385CF-A	2TMA200160A0007	
		Video	Anthracite	41385CF-B	2TMA220161B1006	
2	6	Video	Stainless steel	41386CF-S	2TMA130160X0007	277 x 235 x 20 mm 10.9 x 9.2 x 0.8 inch
		Video	Aluminum	41386CF-A	2TMA200160A0009	
2	8	Audio	Aluminum	41398CF-A	2TMA220161A0008	349 x 235 x 20 mm 13.7 x 9.2 x 0.8 inch
		Video	Aluminum	41388CF-A	2TMA220161A0010	
2	10	Audio	Aluminum	413910CF-A	2TMA220161A0009	421 x 235 x 20 mm 16.6 x 9.2 x 0.8 inch
		Video	Aluminum	413810CF-A	2TMA220161A0011	

● It is possible to combine the frame of the same size for a multi-column installation to support more modules.

Mounting boxes

ABB-Welcome/ABB-Welcome IP - Installation material

3 types of boxes:

Surface-mounted box
for mounting of outdoor station on the wall.

Flush-mounted box
for mounting of outdoor station into the wall. This box is fitted with knock down holes for cabling from left, right, or back.

Pre-installation box
for flush-mounting of outdoor station into the wall for higher stability.

Frame size	Type of installation	Color	Article no.	Order no.
	Surface-mounted	Anthracite ■	41381S-B	2TMA130160B0009
	Surface-mounted	Grey ■	41381S-H	2TMA130160H0009
	Flush-mounted	Anthracite ■	41381F-B	2TMA130160B0001
	Flush-mounted	Grey ■	41381F-H	2TMA130160H0001
	Pre-installation box	Anthracite ■	41381PB	2TMA130160B0017
	Surface-mounted	Anthracite ■	41382S-B	2TMA130160B0010
	Surface-mounted	Grey ■	41382S-H	2TMA130160H0010
	Flush-mounted	Anthracite ■	41382F-B	2TMA130160B0002
	Flush-mounted	Grey ■	41382F-H	2TMA130160H0002
	Pre-installation box	Anthracite ■	41382PB	2TMA130160B0018
	Surface-mounted	Anthracite ■	41383S-B	2TMA130160B0011
	Surface-mounted	Grey ■	41383S-H	2TMA130160H0011
	Flush-mounted	Anthracite ■	41383F-B	2TMA130160B0003
	Flush-mounted	Grey ■	41383F-H	2TMA130160H0003
	Pre-installation box	Anthracite ■	41383PB	2TMA130160B0019
	Surface-mounted	Anthracite ■	41384S-B	2TMA130160B0012
	Surface-mounted	Grey ■	41384S-H	2TMA130160H0012
	Flush-mounted	Anthracite ■	41384F-B	2TMA130160B0004
	Flush-mounted	Grey ■	41384F-H	2TMA130160H0004
	Pre-installation box	Anthracite ■	41384PB	2TMA130160B0020
	Surface-mounted	Anthracite ■	41385S-B	2TMA130160B0013
	Surface-mounted	Grey ■	41385S-H	2TMA130160H0013
	Flush-mounted	Anthracite ■	41385F-B	2TMA130160B0005
	Flush-mounted	Grey ■	41385F-H	2TMA130160H0005
	Pre-installation box	Anthracite ■	41385PB	2TMA130160B0021
	Surface-mounted	Anthracite ■	41386S-B	2TMA130160B0014
	Surface-mounted	Grey ■	41386S-H	2TMA130160H0014
	Flush-mounted	Anthracite ■	41386F-B	2TMA130160B0006
	Flush-mounted	Grey ■	41386F-H	2TMA130160H0006
	Pre-installation box	Anthracite ■	41386PB	2TMA130160B0022

Rain Hood and Weather Cover

ABB-Welcome/ABB-Welcome IP - Installation material

3 types of covers:

Rain hood (SM)
designed to adapt surface-mounted (SM) box

Rain hood (FM)
designed to adapt flush-mounted (FM) box

Columns	Modules	Type of cover	Color	Article no.	Order no.
1	x	Rain hood (SM)	Aluminum ■	41383RH	2TMA130160A0009
1	x	Rain hood (FM)	Aluminum ■	41381RH	2TMA130160A0001
2	x	Rain hood (SM)	Aluminum ■	41384RH	2TMA130160A0010
2	x	Rain hood (FM)	Aluminum ■	41382RH	2TMA130160A0002

Weather cover
designed for full weather surface mounting,
in combination with FM boxes

Columns	Modules	Type of cover	Color	Article no.	Order no.
1	1	Weather cover	Aluminum ■	41021WC-A	2TMA220161A0001
1	2	Weather cover	Aluminum ■	41022WC-A	2TMA220161A0002
1	3	Weather cover	Aluminum ■	41023WC-A	2TMA220161A0003
1	4	Weather cover	Aluminum ■	41024WC-A	2TMA220161A0004
1	5	Weather cover	Aluminum ■	41028WC-A	2TMA220161A0005
2	3	Weather cover	Aluminum ■	41025WC-A	2TMA220161A0006
2	4	Weather cover	Aluminum ■	41026WC-A	2TMA220161A0007

Boxes dimensions

Columns	Modules	Surface-mounted box	Flush-mounted box
1	1	137 x 133 x 32 mm 5.4 x 5.2 x 1.25 inch	137 x 133 x 52 mm 5.4 x 5.2 x 2 inch
1	2	203 x 133 x 32 mm 8 x 5.2 x 1.25 inch	203 x 133 x 52 mm 8 x 5.2 x 2 inch
1	3	275 x 133 x 32 mm 10.8 x 5.2 x 1.25 inch	275 x 133 x 52 mm 10.8 x 5.2 x 2 inch
1	4	347 x 133 x 32 mm 13.6 x 5.2 x 1.25 inch	347 x 133 x 52 mm 13.6 x 5.2 x 2 inch
1	5	419 x 133 x 32 mm 16.5 x 5.2 x 1.25 inch	419 x 133 x 52 mm 16.5 x 5.2 x 2 inch
1	6	275 x 233 x 32 mm 10.8 x 8.7 x 1.25 inch	275 x 233 x 52 mm 10.8 x 8.7 x 2 inch

Covers dimensions

Columns	Modules	Rain hood (SM)
1	n	98 x 143 x 68 mm 3.8 x 5.6 x 2.7 inch
2	n	275 x 233 x 32 mm 10.8 x 8.7 x 1.25 inch
3	n	275 x 233 x 32 mm 10.8 x 8.7 x 1.25 inch

Door entry system

ABB-Welcome - 2-wire indoor stations

		Smart Touch 10"	OneTouch	Video Indoor Station 4.3 WiFi	Video Indoor Station 7"	Video Indoor Station 4.3" Hands-free	Video Indoor Station 4.3" Handset
							
Main features	Display	10" Touch	7" Touch	4.3"	7"	4.3"	4.3"
	Video quality	SD	SD	SD	SD	SD	SD
	Remote call on mobile APP	●	●	●			
	Smart Home	free@home KNX	free@home free@home				
Mounting type	Flush mounting	●	●				
	Surface mounting	●	●	●	●	●	●
	Desktop mounting	●	●	●	●	●	●
Other features	Image call history	●	●	O[1]	●	●	●[4]
	Video surveillance call	●	●	●	●	●	●
	Induction loop	●	●	●	●	●	●
	InterCom	●	●	O[2]	●	●	●
	Room to room call	●	●	O[2]	●	●	●
	Home to home call						
	Call guard unit						
	Variable ringtone		●	●	●	●	●
	Power supply	2-wire BUS	2-wire BUS and direct local	2-wire BUS and direct local	2-wire BUS	2-wire BUS and direct local	2-wire BUS and direct local
	Firmware remote update	●	●	●			
	SD card	●					
	Automatic unlock function	●	●	●	●	●	●
	Video record	●	●				
	Custom audio away message	●	●				
	Call forwarding	●	●				

Notes:
1. Shown in the Welcome App
2. Configured through Welcome App
3. Additional IP gateway needed (83342)
4. With Induction Loop

Door entry system

ABB-Welcome - 2-wire video indoor stations

ABB-SmartTouch® 10''

Freely programmable Touch panel featuring a 10-inch IPS screen with 1280 x 800 resolution that combines smart home automation and door communication in one device for residential applications, hotels, and commercial buildings. ABB-SmartTouch® 10'' offers home control and monitoring of the ABB-free@home®, or ABB i-bus®KNX system and the fully integrated functions of ABB-Welcome.

Control, observe and manage your entire installation on one device: Switching - Dimming - Slider - Blind - RGBW control element - Step switch - Scene switch - Display element - Audio control element – RTC control element – VRV control element and display different values such as energy consumption and production. With scene function, logic functions, presence simulation and time programs. ABB-SmartTouch® 10" can also be used as an end device for communication with the ABB-Welcome outdoor stations, and as part of the ABB-Welcome door communication system.

- Display size: 25,4 cm (10'')
- Display resolution: 1280 x 800
- Display screen: IPS display
- Flush or Surface mounted.
- Can also be mounted on a desktop stand.
- The flat design slim real metal frame sits almost flush with the wall (14 mm) and is available in 4 colors (stainless steel, graphite, gold and rose gold) and black or white glass.

Frame	Version	Article no.	Order no.
Stainless	White ▫	ST/U10.1.11-811	2TMA310050W0001
	Black ■	ST/U10.1.11-825	2TMA310050B0001
Graphite	White ▫	ST/U10.2.11-811	2TMA310050W0002
	Black ■	ST/U10.2.11-825	2TMA310050B0002
Satin gold	White ▫	ST/U10.3.11-811	2TMA310050W0003
	Black ■	ST/U10.3.11-825	2TMA310050B0003
Rose gold	White ▫	ST/U10.4.11-811	2TMA310050W0004
	Black ■	ST/U10.4.11-825	2TMA310050B0004

Surface Mounting Frame for ABB-SmartTouch® 10''

Surface mounting frame for mounting the ABB-SmartTouch® 10'' ST/U10.x.1-8xx on:

- Standard flush mounted wall box VDE & BS
- Already installed flush mounted installation box:
  - 6136/UP
  - 8136/01 UP-500
  - UP-KAST 2
- To be mounted directly on the wall
- To be mounted on the ABB-Welcome table stand

Version	White ▫	Black ■
Article no.	ST/A10.1-811	ST/A10.1-825
Order no.	2TMA310161W0001	2TMA310161B0001

Door entry system

ABB-Welcome - 2-wire video indoor stations

OneTouch

Featuring our first panel equipped with an integrated system access point, simply add ABB-free@home® wireless or flex devices to unlock the full potential of a Smart Home with the added convenience of remote access to control all the the features and answer door calls. It offers an ideal starting point for anyone looking to begin their smart home adventure: begin with door entry and extend it with free@home wireless or Matter. OneTouch can also be connected to a free@home wired system to control it.

- Viewing angle: 75°
- Power Supply: 2-wire bus + 24V DC PoE for IP
- Intuitive GUI on 7'' IPS screen (resolution: 1024 x 600 px)
- Type of installation: SM & FM
- Dimensions: 192 x 128 x 17.2 mm / 7.6 x 5 x 0.7 inch

Version	Article no.	Order no.	Global (w.o. DE and AT)
Black ■	M2249-2B	2TMA320051B0001	●
White □	M2249-2W	2TMA320051W0001	●

Surface-mounted box for OneTouch

Mounting of OneTouch on the wall

- For surface-mounted installation of indoor station
- The product is packed with accessories to ensure qualified installation
- Dimensions: 187.6 x 123.3 x14 mm / 7.4 x 4.9 x 0.6 inch

Version	White □	Black ■
Article no.	42491S-W	42491S-B
Order no.	2TMA320161W0001	2TMA320161B0001

Flush-mounted box & Pre-installation box for OneTouch

Flush-mounted box & Pre-installation box for OneTouch video indoor station

- The flush mounting box is fitted with knock down holes for cabling from left, right, bottom or back
- The product is packed with accessories to ensure qualified installation
- Dimensions: 178 x 108 x 52 mm / 7 x 4.3 x 2.0 inch, 2 boxes together

Article no.	42491F
Order no.	2TMA320161B0002

OneTouch 7 including Surface Mounted Box

Version	Article no.	Order no.	Global (w.o. DE and AT)
Black ■	M2249-2W-04	2TMA320051B0002	●
White □	M2249-2B-04	2TMA320051W0002	●

Door entry system

ABB-Welcome - 2-wire video indoor stations

Video indoor station 4.3 series, WiFi

New 2-wire video indoor station with integrated WiFi to connect mobile APP without additional system devices. Minimalistic & intuitive user interface makes the operation simply enough. 6 touch buttons are easy for operation and one side button to adjust volume, ringtone, brightness and others. You can also accept the call, open the door lock, make a surveillance, and firmware updating and additional activations from the Welcome APP.

- Intuitive button layout, separate “call” & “unlock” button, to avoid mis-operation on small size panel
- Network/WiFi connection & parameters of panel can be configured through Welcome APP following wizard design
- APP pairing process is easy enough to scan QR code for first mobile devices, and click “pair” button for additional mobile devices with same MyBuildings account login
- Enables to use up to 8 mobile devices, installing the ABB-Welcome App, as a client for Welcome locally at home and to connect to myBuildings Portal for the optional remote access and ring notification service.
- Cyber security and data privacy
- Remote firmware update through Welcome APP
- Intuitive GUI on 4.3'' IPS screen (resolution: 480 x 272 px)
- Type of installation: SM
- Dimensions: 122 x 131 x 18 mm / 4.8 x 5.2 x 0.7 inch

Version	White	With induction loop-White	CH only
Article no.	M22401-W	M22403-W	M22401-W-04
Order no.	2TMA220050W0022	2TMA220050W0024	2TMA200051W0001

Video indoor station 7''

Video Indoor Station with 7'' non-Touch Display and additional 6 quick access touch Buttons. The ideal entry-level solution for the video door intercom system. Supports up to 5 Intercom and 5 universal switch functions through simple quick access button. Supports simple & fast Surface mounting installation with an intuitive user interface.

- Display of the video image of the outdoor station. During the conversation a picture of the visitor can be taken and stored in the picture memory
- Quick access touch buttons for door opener, mute, virtuall buttons and video surveillance
- Easy access for up to 5 virtual Intercom entries
- Easy access for up to 5 programmable switch functions
- Supporting Camera-Interface to connect external Cameras
- 7'' non-Touch Display (resolution: 1024 x 600 px)
- Type of installation: SM (metal bracket included)
- Dimensions: 138 x 184 x 19 mm / 5.4 x 7.2 x 0.7 inch

Version	White	With induction loop-White
Article no.	M22411-W	M22413-W
Order no.	2TMA210051W0001	2TMA210051W0002

Flush-mounted box and Pre-installation box for 7'' video indoor station

- The FM box is fitted with knock down holes for cabling from the left, right, bottom or back
- The product is packed with accessories to endure qualified installation

Article no.	42361F
Order no.	2TMA130160B0132

Door entry system

ABB-Welcome - 2-wire video indoor stations

Video Indoor Station 4.3" Handset

Experience security, functionality and simplicity with our Video Indoor Station 4.3" Handset, a complete entry-level solution for your video communication system. It features a non-touch display, integrated handset and six quick-access touch buttons. It conveniently supports up to 5 talk and 5 switch functions. The unit offers seamless surface or desktop mounting and promises an intuitive user experience.

- Live video feed and visitor image capture
- Quick-access touch buttons for door opener, mute, virtual buttons and monitoring
- Supports 5 virtual intercom entries and 5 programmable switch functions
- External camera connection available
- Non-touch 4.3" display (resolution: 1024 x 600 px)
- Installation: Surface mounting (metal bracket included) & desktop (requires 42311D bracket)
- Dimensions (WxHxD) : 206 x 147 x 44 mm / 8.11 x 5.79x 1.73 inch

Version	Article no.	Order no.	EU, USA & others (excluding DE, CH & CN)
White	M22471-W	2TMA220051W0002	●
With induction loop* - White	M22473-W	2TMA220051W0001	●

Video Indoor Station 4.3"

Experience security, functionality and simplicity with our Video Indoor Station 4.3", a complete entry-level solution for your video communication system. It features a non-touch display and six quick-access touch buttons. It conveniently supports up to 5 talk and 5 switch functions. The unit offers seamless surface or desktop mounting and promises an intuitive user experience.

- Live video feed and visitor image capture
- Quick-access touch buttons for door opener, mute, virtual buttons and monitoring
- Supports 5 virtual intercom entries and 5 programmable switch functions
- External camera connection available
- Non-touch 4.3" display (resolution: 1024 x 600 px)
- Installation: Surface mounting (metal bracket included) & desktop (requires 42311D bracket)
- Dimensions (WxHxD) : 152 x 124 x 22.5 mm / 5.98 x 4.88 x 0.89 inch

Version	Article no.	Order no.	EU, USA & others (excluding DE, CH)	USA, others (excluding CN)
White	M22481-W	2TMA220051W0004	●	
	M22484-W	2TMA220051W0005		●
With induction loop* - White	M22483-W	2TMA220051W0003	●	●

Desktop bracket

- Full metal design with brushed finish base, suitable for 7" all touch, 4.3" hands-free video indoor station, 4.3" handset video indoor station and guard unit
- 125 x 107 x 134 mm / 5 x 4.2 x 5.3 inch

Article no.	42311D
Order No.	2TMA070130N0189

Door entry system

ABB-Welcome - 2-wire audio indoor stations

Audio hands-free

Hands-free indoor station with 4 buttons. The light button can be customized as room-to-room intercom, call guard unit.

- Different bell tones for door-call and floor-call, choice of five different bell sounds
- The ringtone can be fixed or cycled
- Floor-call function, a connected button functions as a floor-call button: all indoor stations with the same address trigger a floor call
- Type of installation: SM
- Dimensions: 178 x 81 x 22 mm / 7 x 3.2 x 0.9 inch

Version	Article no.	Order no.	EU (excluding DE, CH)	USA, others (excluding CN)
White	83210 AP-624-500-01	2TMA020020W0064		●
	83210 AP-624-500-02	2TMA210050W0016	●	
Black ■	83210 AP-681-500-01	2TMA070020B0034		●
	83210 AP-681-500-02	2TMA210050B0005	●	
Silver ■	83210 AP-683-500-01	2TMA070020S0006		●
	83210 AP-683-500-02	2TMA210050S0004	●	

Audio handset

Handset indoor station with 3 or 6 buttons.

- 1 easy pushbutton for unlock, and 2 additional buttons for self-setting functions, e.g. intercom, door status check, second lock release or even calling the security guard, etc.
- Max-mid-mute volume adjuster on the side
- 2 LEDs to indicate different working status
- 5 ringtones for different call sources, i.e. from default outdoor station, secondary outdoor station, doorbell, intercom or guard unit
- The activating or deactivating of automatic unlock can be made by simply pressing the unlock button for 10 seconds
- Type of installation: SM
- Dimensions: 175 x 81 x 22 mm / 6.9 x 3.2 x 0.9 inch

Version	Article no.	Order no.	EU (excluding DE, CH)	USA, others (excluding CN)
3 buttons	M22002-W	2TMA070020W0054		●
	M22002-W-02	2TMA210050W0001	●	
3 buttons with induction loop	M22003-W	2TMA070020W0062		●
	M22003-W-02	2TMA210050W0002	●	
6 buttons	M22001-W	2TMA070020W0063		●
	M22001-W-02	2TMA210050W0003	●	

Handset with induction loop

- Suitable for audio handset indoor station with induction loop and 4.3" video handset indoor station with induction loop
- 144 x 53 x 23 mm / 5.7 x 2 x 0.9 inch

Article no.	52303HS-W
Order No.	2TMA070020W0065

Door entry system

ABB-Welcome IP - Video indoor stations - comparision

IP touch 10" and IP touch 7"
The stylish multifunctional IP touch panel fits elegantly into any interior. Thanks to its intuitive design, the IP touch panel will display everything that is happening in front of your door. In addition, the panel can be a centralized screen for other ABB sub-system, like CCTV, access control and home automation.

Shared features:
- Extension to App without additional system device
- Central control panel to DES, Surveillance, Home automation (KNX &free@home)
- Cyber security and data privacy
- Clean & consistent design with invisible mic & speaker hole• Slim thickness with 7.8 mm when flush mounted
- Color, material, End trip & mounting type selectable
- Easy installation in all kind of walls
- Easy commissioning by QR code scanning or central PC management software
- PoE and local power supply optional
- Remote firmware update
- PoE in all the versions

		IP touch 10	**IP touch 7**	**OneTouch**	**IP touch Lite 7**
Main features	Display	10" Touch	7" Touch	7" Touch	7" Touch
	Video Quality	HD 720p	HD 720p	HD 720p	HD 720p
	Remote call on mobile APP	●	●	●	●
	Smart Home	free@home KNX Max 100 control frames	free@home KNX Max 64 control frames	free@home free@home Max 150 control frames	
Mounting type	Flush mounting	●	●	●	●
	Surface mounting	●	●	●	●
	Desktop mounting				
Other features	Image history list	●	●	●	●
	Cyclical surveillance	●	●	●	●
	Induction loop	●	●	●	●
	Manual call	●	●	●	●
	Room to room call	●	●	●	●
	Home to home call	●	●	●	●
	Call guard unit	●	●	●	●
	Variable ringtone	●	●	●	●
	Power supply	Both PoE and direct local	Both PoE and direct local	Both PoE and direct local	Both PoE and direct local
	Firmware remote update	●	●	●	●
	SD card	●	●		
	Automatic unlock function	●	●	●	●
	Video record	●	●	●	●
	Custom audio away message	●	●	●	●
	Call forwarding	●	●	●	●

Door entry system

ABB-Welcome IP - Video indoor stations

IP touch 10

- Intuitive GUI on sliding screen (1280x800 px)
- Dustproof and waterproof as IP30
- Type of installation: SM or FM - depending on the version
- Induction loop in all the versions
- Stainless steel end strip
- Enables to use up to 8 mobile devices, installing the ABB-Welcome App, as a client for Welcome IP locally at home and to connect to myBuildings Portal for the optional remote access and ring notification service.
- Dimensions (LAN + LAN): 251 x 185 x 30 mm / 9.9 x 7.3 x 1.2 inch
- Dimensions (LAN + WiFi): 251 x 185 x 17 mm / 9.9 x 7.3 x 0.7 inch

	Version	Black ■	White □	Flush Mounting (FM)	Surface Mounting (SM)
+	**Article no.** **Order no.**	H8237-5B 2TMA130050B0055	H8237-5W 2TMA130050W0055	●	
+	**Article no.** **Order no.**	H8237-4B 2TMA130050B0054	H8237-4W 2TMA130050W0054	●	●

Surfece-mounted box for IP touch panel 10

Mounting of IP touch 10 on the wall

- For surface-mounted installation of indoor station
- The product is packed with accessories to ensure qualified installation
- Dimensions: 251 x 184 x 14 mm / 9.9 x 7.2 x 0.5 inch

Version	White □	Black ■
Article no. **Order no.**	42371S-W 2TMA130161W0001	42371S-B 2TMA130161B0001

Flush-mounted box & Pre-installation box for IP touch 7 and 10

Flush-mounted box and Pre-installation box for IP 7 and 10 inch video indoor station

- The flush mounting box is fitted with knock down holes for cabling from left, right, bottom or back
- The product is packed with accessories to ensure qualified installation
- Dimensions: 194 x 145 x 55 mm / 7.6 x 5.7 x 2.2 inch, 2 boxes together

Article no. **Order no.**	42361F 2TMA130160B0132

Door entry system

ABB-Welcome IP - Video indoor stations

IP touch 7

- Intuitive GUI on sliding screen (1024 x 600 px)
- Dustproof and waterproof as IP30
- Type of installation: SM or FM - depending on the version
- Induction loop in all the versions
- Stainless steel end strip
- Enables to use up to 8 mobile devices, installing the ABB-Welcome App, as a client for Welcome locally at home and to connect to myBuildings Portal for the optional remote access and ring notification service.
- Dimensions (LAN + LAN): 199 x 150 x 30 mm / 7.8 x 5.9 x 1.2 inch
- Dimensions (LAN + WiFi): 199 x 150 x 17 mm / 7.8 x 5.9x 0.7 inch

	Version	Black ■	White □	Flush Mounting (FM)	Surface Mounting (SM)
+	**Article no.**	H8236-5B	H8236-5W	●	
	Order no.	2TMA130050B0067	2TMA130050W0067		
+	**Article no.**	H8236-4B	H8236-4W	●	●
	Order no.	2TMA130050B0065	2TMA130050W0065		

Surfece-mounted box for IP touch panel 7

Mounting of IP touch 7 on the wall

- For surface-mounted installation of indoor station
- The product is packed with accessories to ensure qualified installation
- Dimensions: 197 x 148 x 13 mm / 7.7 x 5.8 x 0.5 inch

Version	White □	Black ■
Article no.	42361S-W	42361S-B
Order no.	2TMA130160W0017	2TMA130160B0080

Flush-mounted box & Pre-installation box for IP touch 7 and 10

Flush-mounted box and Pre-installation box for IP 7 and 10 inch video indoor station

- The flush mounting box is fitted with knock down holes for cabling from left, right, bottom or back
- The product is packed with accessories to ensure qualified installation
- Dimensions: 194 x 145 x 55 mm / 7.6 x 5.7 x 2.2 inch, 2 boxes together

Article no.	42361F
Order no.	2TMA130160B0132

Door entry system

ABB-Welcome - 2-wire video indoor stations

OneTouch

Featuring our first panel equipped with an integrated system access point, simply add ABB-free@home® wireless or flex devices to unlock the full potential of a Smart Home with the added convenience of remote access to control all the the features and answer door calls. It offers an ideal starting point for anyone looking to begin their smart home adventure: begin with door entry and extend it with free@home wireless or Matter. OneTouch can also be connected to a free@home wired system to control it.

- Viewing angle: 75°
- Power Supply: 2-wire bus + 24V DC PoE for IP
- Intuitive GUI on 7'' IPS screen (resolution: 1024 x 600 px)
- Type of installation: SM & FM
- Dimensions: 192 x 128 x 17.2 mm / 7.6 x 5 x 0.7 inch

Version	Article no.	Order no.	Global (w.o. DE and AT)
Black ■	M2249-2B	2TMA320051B0001	●
White □	M2249-2W	2TMA320051W0001	●

Surface-mounted box for OneTouch

Mounting of OneTouch on the wall

- For surface-mounted installation of indoor station
- The product is packed with accessories to ensure qualified installation
- Dimensions: 187.6 x 123.3 x14 mm / 7.4 x 4.9 x 0.6 inch

Version	White □	Black ■
Article no.	42491S-W	42491S-B
Order no.	2TMA320161W0001	2TMA320161B0001

Flush-mounted box & Pre-installation box for OneTouch

Flush-mounted box & Pre-installation box for OneTouch video indoor station

- The flush mounting box is fitted with knock down holes for cabling from left, right, bottom or back
- The product is packed with accessories to ensure qualified installation
- Dimensions: 178 x 108 x 52 mm / 7 x 4.3 x 2.0 inch, 2 boxes together

Article no.	42491F
Order no.	2TMA320161B0002

OneTouch 7 including Surface Mounted Box

Version	Article no.	Order no.	Global (w.o. DE and AT)
Black ■	M2249-2W-04	2TMA320051W0002	●
White □	M2249-2B-04	2TMA320051B0002	●

Door entry system

ABB-Welcome IP - Video indoor stations

IP touch Lite 7

- Intuitive GUI on sliding screen (1024 x 600 px)
- Dustproof and waterproof as IP20
- Type of installation: SM and FM
- Enables to use up to 8 mobile devices, installing the ABB-Welcome App, as a client for Welcome locally at home and to connect to myBuildings Portal for the optional remote access and ring notification service.
- Dimensions (LAN + WiFi): 192 x 128 x 17.2 mm / 7.6 x 5.0 x 0.7 inch

	Version	Black ■	White □	Flush Mounting (FM)	Surface Mounting (SM)
+	**Article no.** **Order no.**	H8249-1B 2TMA130051B0009	H8249-1W 2TMA130051W0010	●	●

Surfece-mounted box for IP touch Lite panel 7

Mounting of IP touch Lite 7 on the wall

- For surface-mounted installation of indoor station
- The product is packed with accessories to ensure qualified installation
- Dimensions: 187.6 x 123.3 x14 mm / 7.4 x 4.9 x 0.6 inch

Version	White □	Black ■
Article no. **Order no.**	42491S-W 2TMA320161W0001	42491S-B 2TMA320161B0001

Flush-mounted box & Pre-installation box for IP touch Lite 7

Flush-mounted box & Pre-installation box for IP touch Lite 7 video indoor station

- The flush mounting box is fitted with knock down holes for cabling from left, right, bottom or back
- The product is packed with accessories to ensure qualified installation
- Dimensions: 178 x 108 x 52 mm / 7 x 4.3 x 2.0 inch, 2 boxes together

Article no. **Order no.**	42491F 2TMA320161B0002

Door entry system

ABB-Welcome IP audio indoor station

Audio IP
Handset indoor station with 6 buttons.

- Big 4 preset operation button with unlock, intercom, light switch, mute function and 2 additional customizable buttons via SmartAP
- 2 LEDs to indicate different working status
- Max-mid-mute volume adjuster on the side
- 4 ringtones that could be selected for different call sources via SmartAP
- Room 2 Room and Home 2 Home
- Support induction loop
- Type of installation: SM
- Dimensions: 175 x 81 x 22 mm / 6.9 x 3.2 x 0.9 inch

Article no.	H82001-W
H82001-W	2TMA130011W0001

Door entry system

ABB-Welcome - System devices

System controller

- Two version available: Standard system controller & mini system controller
- As the “brain” of the individual system, it manages the communication between the outdoor station and the indoor station
- Two working modes : “all on” and “one on”
- If in “all on” mode, and the apartment contains more than 1 video indoor station, all the screens in the apartment will be on while only one is on if in “one on” mode
- It can also serve as auxiliary BUS power supply when connected to gateway in certain mode
- 1 LED for normal working condition indication
- Overheat, short-circuit and lightening protection
- Dimensions (standard version): 90 x 72 x 65 mm / 3.5 x 2.8 x 2.5 inch
- Dimensions (mini version): 90 x 72 x 65 mm / 3.5 x 2.8 x 2.5 inch

Version	**Standard 1.2A output, MDRC 8U, with lower consumption in “one on” mode**
Article no.	M2300-101
Order no.	2TMA210161W0001
Pack Qty	1/10

Version	**Mini 0.65A output, MDRC 4U, with lowerconsumption in “one on” mode**
Article no.	M2301-101
Order no.	2TMA210161W0002
Pack Qty	1/10

Gateway

- It offers 5 different modes which can be set by dip switch: apartment gateway, floor gateway, building gateway, auxiliary BUS power supply interface and line amplifier
- Dimensinos: 90 x 72 x 65 mm / 3.5 x 2.8 x 2.6 inch

Article no.	M2302
Order no.	2TMA070060W0006
Pack Qty	1/10

Door entry system

ABB-Welcome - System devices

Din rail adaptor

- One DIN rail adaptor fit for all the flush mounted devices: video distributor, switch actuator, and camera interface
- Adjustable and consistent looking cover can be taken out if needed
- Dimensions: 90 x 72 x 65 mm / 3.5 x 2.8 x 2.5 inch

Version	EU	Non EU
Article no.	53001DR-02	53001DR
Order no.	2TMA210160H0005	2TMA070150H0001

Camera interface

- Supports up to 4 analog 3rd party cameras for one device
- Supports camera connection to the existing video/audio outdoor station
- Supports transfer of image from guard unit to the indoor station
- Supports the camera for viewing the area of the floor (for example with the connection from indoor station to this interface, where it connects to the analog camera
- Supports input and output of video signal of outdoor station to 3rd party VDR during the call, which can be viewed from the video indoor station)
- Supports installation in DIN, surface mounted
- Dimensinos: 77 x 61 x 25 mm / 3 x 2.4 x 1 inch

Version	EU	Non EU
Article no.	83327-500-02	83327-500-01
Order no.	2TMA210160B0003	2TMA070150B0007

Video distributor

- This compact device supports 4-way outputs connected to different apartments or different high-rise buildings
- Flush-mounted into box or surface mounted through the hole in the middle, or DIN rail mounted via DIN adaptor (Article no. 53001DR)
- Dimensions: 45 x 45 x 26 mm / 1.7 x 1.7 x 1 inch

Version	EU	Non EU
Article no.	M2304-02	M2304
Order no.	2TMA210160B0001	2TMA070070B0006

Video outdoor distributor

- Used for buildings with more than 1 outdoor station
- 2-way inputs are connected to different outdoor stations
- Dimensions: 90 x 36 x 65 mm / 3.5 x 1.4 x 2.5 inch

Version	EU	Non EU
Article no.	83325/2-500-02	83325/2-500-01
Order no.	2TMA210160H0004	2TMA020070N0011

Door entry system

ABB-Welcome - System devices

Switch actuator

- This compact device has 3 working modes: extend door bell, door opener and time relay
- Local pushbutton can be connected as control input
- The switching duration of unlock or switching on lightings is adjustable
- Flush-mounted or DIN rail mounted via DIN adaptor (Article no. 53001DR)
- Dimensions: 51 x 51 x 29 mm / 2 x 2 x 1.1 inch

Version	EU	Non EU
Article no.	M2305-02	M2305
Order no.	2TMA210160B0002	2TMA070150B0006

Guard unit

- 4.3" touch screen and 6 touch film buttons can ensure the communication with calls from outdoor station, indoor station or other guard unit (if any)
- It can be manually or automatically set into intercept mode to increase security level for all users or only certain individuals
- Surveillance can be done through the camera of outdoor stations or integrated analog camera
- Missed calls and alarm messages stored in the memory can be reviewed
- It can be surface mounted on the wall or desktop mounted (desktop bracket 42311D is needed)
- Dimensinos: 144 x 198 x 45 mm / 5.6 x 7.8 x 1.7 inch

Version	EU	Non EU
Article no.	M2303-02	M2303
Order no.	2TMA210050W0018	2TMA070030W0007

Lift control module

- Enhance security to allow authorized visitor/resident to ONLY go to the designated floor while unauthorized visitor can not activate any floor button in the lift
- Efficient programming through PC by dedicated commissioning software
- Each module supports up to 16 floors, total up to 16 modules can be cascaded
- Dimensions of relay mode: 216 x 110 x 45 mm / 8.5 x 4.3 x 1.7 inch
- Dimensions of M adaptor: 90 x 72 x 65 mm / 3.5 x 2.8 x 2.5 inch

Relay Module

Version	EU	Non EU
Article no.	M2307-02	M2307
Order no.	2TMA210160N0013	2TMA070150N0044

M-Adapter (2 functions: PC adaptor and lift control module)

Version	EU	Non EU
Article no.	M2306-02	M2306
Order no.	2TMA210160N0012	2TMA070100N0001

2-wire adaptor

- Supports to connect PC with management software into 2-wire DES system
- PC management software supports centralized management of user card no. /user names/logic addresses, registration/deletion/change
- Supports the building system without floor system
- PC management software records system logs, e,g unlock log, SOS log
- PC management software supports to configure lift control modules
- Dimensions: 90 x 180 x 65 mm / 3.5 x 7 x 2.5 inch

Version	EU	Non EU
Article no.	M2308-02	M2308
Order no.	2TMA210160N0004	2TMA210160N0003

Door entry system

ABB-Welcome - System devices

External camera

- Analogue camera solutions for the camera interface from the ABB-Welcome range
- Three types are optional for different application, normal camera/dome camera/mini dome camera
- Image Sensor: 1/3" 1.3MP SONY Exmor CMOS
- Effective Pixels: 1305 (H) x 1049 (V)
- Resolution: 700TVL
- Horizontal detection angle: 30°- 90° (manually adjustable for video camera & dome camera); 75°(fixed for mini dome camera)
- S/N Ratio: ≥50 dB
- Min. illumination (Day): 0.1 Lux @ F2.0
- Video signal: 1 x CVBS, 1Vpp, 75 Ohm (BNC)
- White Balance: AWB, 1 800 K – 10 800 K
- Lens: 2.8-12 mm (manually adjustable for video camera & dome camera); 3.6 mm (fixed for mini dome camera)
- IR Range: 50m (video camera), 40m (dome camera), 30m (mini dome camera)
- Input Voltage: DC 12 V +/- 10%
- Dustproof and waterproof as IP 66
- Dimensions Video camera: 286 x 86 x 77 mm / 11.3 x 3.4 x 3 inch
- Dimensions Dome camera: 130 x 119 x 104 mm / 5.1 x 4.7 x 4 inch
- Dimensions Mini dome camera: 105 x 94 x 83 mm / 4.1 x 3.7 x 3.3 inch

Version	Video camera	Dome camera	Mini dome camera
Article no.	83550/1-500-01	83550/2-500-01	83550/3-500-01
Order no.	2TMA210160N0006	2TMA210160N0007	2TMA210160N0008
Pack Qty	1/4	1/12	1/12

Door entry system

ABB-Welcome IP - System devices

Smart Access Point Pro

A central management device of AccessControl and Welcome IP, it can couple as sub-system, and also manage interworking of multiple sub-system of same type. Commissioning and remote control is executed via web interface. No additional commissioning software is required. Connection to the network via WLAN client mode or via CAT cable to manage all your access, configure all your devices, record your logs, etc.

- Easy to commissioning
- Access rights for full management
- Enhanced security with record event log and receive notification and alert
- Manage all connected devices
- Interaction between different systems
- Manage welcome App
- Event management and building-wide messaging
- Integrated chimey, easy for retrofit
- In-build BLE, the best choice for standalone AC system
- Dimensions: 204 x 132 x 32 mm / 8 x 5.2 x 1.25 inch
- Network parameter:
  - Operating mode:
    LAN/Wireless access point
  - Wireless transmission band:
    IEEE 802.11 a/b/g/n 2.4 GHz/5.8 GHz
  - Safety standard: WPA-PSK, WPA2-PSK, WPA, WPA2, IEEE 802.1x
  - Network connection standard:
    10 / 100 Mbps, auto MDI/MDI-X
- Radio interface: IEEE 802.15.4 2.4GHz radio
- Power supply:
  - 24VDC, together with ABB power adaptor
  - PoE(Power over Ethernet)
- Environment:
  - Temperature: -10 °C to +45 °C
  - Protection type: IP30
  - Vandal proof: IK07
  - Humidity: 0 to 95%, non-condensing

Article no.	D04011
Order no.	2TMA400260W0002

Door entry system

ABB-Welcome IP - System devices

Guard unit

The guard unit with desk-top design provides access to various services using the intuitive icon menu on the touch screen. Communication is possible with IP touch panel, outdoor station and other guard unit.

- Support to establish surveillance to outdoor station or IP camera
- Intercept to increase the security and service
- Support to release all doors or dedicated doors in case of emergency
- Receive the alarm and panic call (SOS) from IP touch panel
- Dimensions: 265 x 165 x 117 mm / 10.4 x 6.5 x 4.6 inch

Article no.	H8303
Order no.	2TMA130160W0018

IP actuator (LAN port)

Connecting electrical door opener or hall light directly

- Easy to adjust the switching duration of unlock or the switching of light
- Dimensions: 90 x 70 x 65 mm / 3.5 x 2.7 x 2.5 inch

Version	**Grey** ■
Article no.	H8304
Order no.	2TMA130160H0051

24 VDC mini Power adaptor

Power adaptor supplies the power for IP touch panels and Welcome IP Access Point Pro

- Provide stable power supply input
- Dimensions: 44 x 72 x 60 mm / 1.7 x 2.8 x 2.4 inch

Version	**includes plug-adaptors for EU, UK, US, CN, AU**
Article no.	53012PS
Order no.	2TMA130160W0024

Door entry system

ABB-Welcome IP - System devices

Lift control module

The Elevator Controller and Relay Module System, once configured within the Welcome IP Network, provides an effective interface to allow Welcome IP Indoor Stations and Outdoor Stations to communicate with the Elavators within the building, by triggering the elevators' call and by authorizing visitors and residents to access the correct building's floor.

- Apartment to apartment elevator call/authentication
- Integrated IS, OS and APP calling set up
- Cyber security & remote update
- Parameters can be configured by Smart Access Point, easy and simple via a 3 setting modes (Pre-Configured, Semi-automatic, Manual)
- Maximum security and privacy for an IP based device
- Remote firmware update through Smart Access Point

Version	Elevator Controller
Article no.	H8308
Order no.	2TMA130161W0003

Relay Module

Version	EU	Non EU
Article no.	M2307-02	M2307
Order no.	2TMA210160N0013	2TMA070150N0044

Door entry system

ABB-Welcome/ABB-Welcome IP - Accessories

ID card

- 125 KHz
- ISO18000-2

Version	Proximity key fob	Proximity badge
Article no.	51021F-L	51021B
Order no.	2TMA070180L0001	2TMA070180N0002

IC card

- 13.56 MHz
- ISO14443A

Proximity key fob	Yellow ■	Red ■	Blue ■
Article no.	51022F-Y	51022F-R	51022F-L
Order no.	2TMA070180Y0001	2TMA070180R0001	2TMA070180L0002

New Proximity key fob

- Dimensions: 201 x 131 x 70 mm / 7.9 x 5.1 x 27 inch

Version	ID card, white □	ID card, black ■	IC card, white □	IC card, black ■
Article no.	51023F-W	51023F-B	51024F-W	51024F-B
Order no.	2TMA070180W0001	2TMA070180B0001	2TMA070180W0002	2TMA070180B0002

Proximity badge, IC card

- Dimensions: 40 x 31 x 5 mm / 1.6 x 1.2 x 0.2 inch

Article no.	83173-500-01
Order no.	2TMA070180N0027

Label holder for round pushbutton module

- Label holder for the round pushbutton module, with stamped labelling
- Contains one support frame and two extension support frames

Article no.	83161-500-01
Order no.	2TMA070180N0011

Door entry system

ABB-Welcome/ ABB-Welcome IP - Accessories

Labelling sheet, A4

- Quality labelling sheet for nameplate
- Easy to be printed and cut
- Waterproof
- Size 2/5, 210 x 297 mm / 8.2 x 11.7 inch

Version	A4	1/3 height, A4	1/4 height, A4	for roundpush botton module, A4
Article no.	51021L	51022L	51023L	51024L
Order no.	2TMA070180N0004	2TMA070180N0005	2TMA070180N0006	2TMA070180N0010

Cushion set for surface-mounted installation

Spare part for surface mounting when the installation cable lay on the wall

- Easy to install
- Dimensions: 15 x 10 x 5 mm / 0.6 x 0.4 x 0.2 inch

Article no.	52311C
Order no.	2TMA210160W0001

Joining fixture

Joining fixture used when more than one flush mounted box needs to be connected together

- Easy to integrate mounting boxes together
- Dimensions: 120 x 83 x 80 mm / 4.7 x 3.3 x 3.1 inch

Article no.	51381J
Order no.	2TMA130160B0124

Mounting tool

The mounting tool use to dismoute the outdoor station

- Easy to install and removal end strip
- Dimensions: 165 x 14 x 26 mm / 6.5 x 0.5 x 1 inch

Article no.	51381MT
Order no.	2TMA130160B0025

Outdoor station End-strip

End-strip for outdoor station cover frame

- Easy to install and replace
- Size 1 dimensions: 135 x 19 x 16 mm / 5.3 x 0.7 x 0.6 inch
- Size 1 dimensions: 235 x 19 x 16 mm / 9.2 x 0.7 x 0.6 inchh

Version	Size 1	White	Stainless steel
Article no.		51381EP-W	51381EP-S
Order no.		2TMA130160W0001	2TMA130160X0002
Version	**Size 2**	**Stainless steel**	**Aluminum**
Article no.		51382EP-S	51382EP-A
Order no.		2TMA130160X0003	2TMA130160A0023

Door entry system

ABB-Welcome - Accessories

Cavity wall set

- For cavity wall mounting of the flush-mounted wall box
- For outdoor station and 4.3" video hands-free
- Dimensions: 120 x 80 x 10 mm / 4.7 x 3.1 x 0.4 inch

Article no.	51021CS
Order no.	2TMA070180N0001
Pack Qty	1/18

Bracket Spare parts

- Bracket spare part for Video Indoor Station 7, Video Indoor Station 4.3 Wifi
- Video Indoor Station 4.3 and Video Indoor Station 4.3 Handset
- Article includes two Bracket Variants, USA and Global Version

Article no.	42471B
Order no.	2TMA220161N0001

Door entry system

ABB-Welcome - Family home video kits

- Mini video outdoor station, 1 pushbutton, aluminum, with ID card reader
- Video Indoor Station 7"

Including:
- Mini system controller
- Proximity key fob, ID card, white
- Proximity key fob, ID card, black

Version	SM	FM
Article no.	M20491	M20492
Order no.	2TMA220301N0001	2TMA220311N0002

- Mini video outdoor station, 1 pushbutton, aluminum, with ID card reader
- Video Indoor Station 4.3", Wi-Fi, white

Including:
- Mini system controller
- Proximity key fob, ID card, white
- Proximity key fob, ID card, black
- Pre-installation box with FM version

Version	SM	FM
Article no.	M20481	M20482
Order no.	2TMA210311N0002	2TMA210311N0003

- Mini video outdoor station, 1 pushbutton, aluminum
- Video Indoor Station 4.3"

Including:
- Mini system controller

Version	SM	FM
Article no.	M20521	M20522
Order no.	2TMA220101N0001	2TMA220101N0002

- Mini video outdoor station, 2 pushbutton, aluminum, surface-mounted installation
- 2 x Video Indoor Station 4.3

Including:
- Mini system controller

Article no.	M20621
Order no.	2TMA220101N0005

Door entry system

ABB-Welcome - Family home video kits

- Audio outdoor station, 1 pushbutton, aluminum, flush-mounted installation
- Audio handset indoor station, 3 buttons, white

Including:
- Mini system controller
- Flush-mounted box

Article no.	M20021
Order no.	2TMA210311N0004

- Video outdoor station, 1 button, aluminum, flush-mounted installation
- Video Indoor Station 4.3"

Including:
- Mini system controller
- Flush-mounted box

Article no.	M20531
Order no.	2TMA220101N0003

- Video outdoor station, 1 button, aluminum, flush-mounted installation
- Video Indoor Station 4.3", Wi-Fi, white

Including:
- Mini system controller
- Flush-mounted box

Article no.	M20471
Order no.	2TMA210311N0001

- Video outdoor station, 1 button, aluminum, flush-mounted installation"
- Video Indoor Station 4.3 Handset

Including:
- Mini system controller
- Flush-mounted box

Article no.	M20541
Order no.	2TMA220101N0004

INTRUSION ALARM SYSTEMS

Electrical installation solutions for buildings
Intrusion Alarm Systems

Index

Conventional Intrusion Alarm Components	**2**
Magnetic Contacts	2
Glass Break Detectors	3
Lock Monitoring	4
Technical Detectors	5
Signalling Devices	6
Installation Material	7
Batteries	8

You may also visit our Intrusion alarm systems website:

Intrusion Alarm Systems

Conventional Intrusion Alarm Components – Magnetic Contacts

Magnetic contacts monitor windows, doors, hatches or other access points for their open or closed state. The state is evaluated by the alarm system to trigger an intrusion alarm. Compatible systems: KNX.

MRS/W

MRSS/W

LMRS

Magnet Reed Contact Set

For opening surveillance of windows and doors, complete for bolting or drilling. Contents: 1 magnet, 1 reed contact with 4.0 m connection cable LIYY 4 x 0.14 mm², 2 housings, 2 spacer plates, 2 flanges and 4 anti-magnetic fixing screws. VdS class B.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
Magnet Reed Contact Set, white	–	MRS/W	GHQ3201972R0001		0.082	1
Saver Set (20 pcs.), white	–	VMRS/W	GHQ3201972R0011		1.8	1
Magnet Reedcontact, white, VdS C	–	MRSS/W	GHV9210018V0080		0.088	1
Magnet Reedcontact, 230 V	–	LMRS	2CDG250001R0011		0.311	1

MC-C 1.1

Rolling Door Reed Contact

The Rolling Door Reed Contact Set is mounted mainly on rolling, sliding, and tilting doors.
The contact housing is mounted on the ground (a flat support surface is required).
Only screws made of anti-magnetic material may be used for mounting.
Due to the weatherproof and mechanically stable design of the contact housing, the circuit is mostly protected against damage when rubber-tired vehicles drive over it.
The 4-wire cable is protected by a plastic-coated metal hose.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
VdS Class B, EN Grade 2	–	MC-C1.1	2CDG250006R0011		0.3	1

Intrusion Alarm Systems

Conventional Intrusion Alarm Components – Glass Break Detectors

Glass break detectors evaluate glass breakage of glass surfaces from windows or doors. Compatible systems: KNX.

SPGS/W

Passive Glass Break Detector

Passive Glass Break Detector evaluates typical glass-breakage noises. VdS class B.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
white	–	SPGS/W	GHV9220004V0009		0.11	1

Intrusion Alarm Systems

Conventional Intrusion Alarm Components – Lock Monitoring

The lock monitoring of windows, doors, hatches or other access points for their unlocked or locked state ensures that every access point is locked before the building is left. Also it helps to reduce false alarms in the building. Compatible systems: KNX.

WRK/W

Lock Bolt Switching Contact with Connection Cable

For installation in the strike plate, for lock monitoring on doors. Water-tight IP 67, with 2.5 m connection cable LIYY 3 x 0.14 mm². VdS class C.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
	–	WRK/W	2CDG250003R0011		0.03	1

Intrusion Alarm Systems

Conventional Intrusion Alarm Components – Technical Detectors

No matter whether they are smoke, gas or water leakage, the right detector will recognize it.

TD-C 1.1

Gas Detector with Relay Contact

The Gas Detector is used for monitoring gas leakage of domestic and commercial rooms. It detects gases like propane, methane and butane as well als acetylene, city gas and natural gas. The detector can be connected to ABB intrusion and fire alarm control panels, as well as ABB i-bus® binary inputs via a potential-free relay contact. Suitable as a stand-alone device. An external power supply with 12-24 V DC is required.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
	–	TD-C 1.1	2CDG220023R0011		0.167	1

SWM 4

Water Detector for Detector Groups

A resin-encapsulated water detector with gold-plated Termipoint pins, detects water ingress, e.g., pipe fractures, ingress of groundwater and sewage, water damage caused by washing machines and dishwashers etc. before the damage becomes too expensive.
For operation directly on detector circuits of intrusion alarm panels or security terminals.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
	–	SWM 4	GHQ4030001R0004		0.16	1

SWM 4/RN

Water Detector with Relay, 12 V

Features a potential free changeover contact output, an LED parallel output and a LED display. The detector resets itself automatically when the affected area dries out. The device draws its power from an external 10 ... 23 V DC voltage source.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
	–	SWM4/RN	GHQ4030001R0012		0.23	1

Intrusion Alarm Systems

Conventional Intrusion Alarm Components – Signalling Devices

Signalling devices are used for local alarming. A distinction is made between internal and external alarming. Internal alarming is used, i.e. when people are present in the monitored building. It is used solely to make people aware of a danger. External alarming is carried out using acoustic signaling devices (sirens) and visual signaling devices (strobe light). External alarming is used to contact the neighborhood or the general public. Compatible systems: KNX.

SSS

Indoor Siren, 12 V DC

Electronic solid-state siren with intermittent tone for alarm purposes in indoor installations. External dimensions: ø x H = 90 x 37 mm.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
	–	SSS	GHV9270001V0001		0.17	1

SSF/GB

Siren with Strobe

An aluminium protective housing with additional protective enamel coating. Protected against sabotage by a case tamper contact. The alarm inputs are wired onto a terminal strip. With fixing screw (M4) for potential equalization on the base.
Dimensions: H x W x D = 258 x 205 x 88 mm; Color: RAL 9002 Environmental class III to VdS.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
	–	SSF/GB	GHQ3050018R0001		1.81	1

TA2

Escape door monitoring

In conjunction with a magnetic reed contact, it is suitable for monitoring emergency exit doors for unauthorized opening. The built-in power supply allows the device to work independently. A potential-free changeover contact is available for controlling signal generators.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
Profile cylinder for escape door surveillance and day alert	–	TA2	2CDG260001R0011		1.112	1

Intrusion Alarm Systems

Conventional Intrusion Alarm Components – Installation Material

Installation material (junction boxes, cable hoses) for alarm systems ensure a safe and clean installation of all components.



IM-C1.1

Cable hose

Cable hoses are needed to protect cables mounted on the moving part of a window or door. The cable hoses are available in different sizes.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
Cable hose	–	IM-C1.1	2CDG250007R0011		0.07	1

Intrusion Alarm Systems

Conventional Intrusion Alarm Components – Batteries

Rechargeable batteries ensure back-up power for the alarm system in case the power supply fails. The entire alarm system remains fully operational, even for multiple hours.

SAK7

SAK17

SAK18

Sealed Lead Acid Batteries, 12 V DC

Sealed lead acid battery for power backup up of alarm systems. Maintenance free.

Description	Mod. width	Order details		Price 1 piece	Weight 1 piece	Pack unit
		Type code	Order code		kg	pc.
7.2 Ah	–	SAK7	GHV9240001V0011		2.98	1
12 Ah	–	SAK12	GHV9240001V0012		7.15	1
18 Ah	–	SAK17	GHV9240001V0013		7.15	1

Notes

SUBDISTRIBUTION BOARDS

Electrical installation solutions for buildings
Subdistribution boards

Index

ComfortLine	**2**
Compact distribution boards CA/CU	2
Wall-mounting cabinets A/B	44
TwinLine N wall mounting and floor standing cabinets	**64**
TwinLine N 44	66
TwinLine N 55	70
TwinLine N accessories	92
TriLine C switchgear cabinets	**136**
Interior expansion system CombiLine N	**188**
CombiLine N modules	194
Busbars TriLine system and pro *E* power system	250
Interior expansion system CombiLine N	293
Interior expansion system parts	305
Distribution panels/combination sets	340
Distribution panel system CombiLine X	**350**
Busbar holder	**352**
Fire protection housing	**358**
System pro E® energy	**390**
System pro E® energy L	394
System pro E® energy M	400
System pro E® energy Combi	418
System pro E® energy PB	491

COMFORTLINE COMPACT CA AND CU COMPACT DISTRIBUTION BOARDS

For wall- and flush-mounting

CA25AVM

CU52K

Cabinet type	CA / enclosures for wall-mounting				CU / enclosures for flush- and hollow-wall mounting			
Degree of protection	IP 30 / IP 44				IP 30			
Protection class	II				II			
Depth	160 mm				110 mm			
Panel width	**1**	**2**	**3**	**4**	**1**	**2**	**3**	**4**
3 Rows	●	●	-	-	-	●	-	-
4 Rows	●	●	●	-	●	●	●	-
5 Rows	●	●	●	●	●	●	●	●
6 Rows	●	●	●	●	●	●	●	●
7 Rows	●	●	●	●	●	●	●	-
8 Rows	●	●	●	-	●	●	-	-

ComfortLine Compact CA distribution boards

For wall-mounting with distribution panels and sheet steel door

Technical specifications	
Standards/regulations	DIN EN 61439-1/-3
Protection class	II, double insulated
	I, earthed in connection with earthing set (accessories)
Degree of protection	IP44
Mechanical impact strength	IK07
Rated current	I_{nA} up to 125 A

Product features	
Enclosures and doors	Made of sheet steel, colour white RAL 9016, powder-coated
	With depth level adjustment
	One top mounted membrane flange per panel width
	Door opening angle 120°
	Double-wing doors on cabinets with three or more panel widths
	Doors with espagnolette closure
	Plastic covers with quick-action screw
	With cable strain relief
Internal configuration options	DIN rail spacing 125 mm/150 mm
	Panels for rail mounting devices with N/PE Quick-terminals (1x ZK221 per panel width)
	Panels for terminal blocks: without N/PE Quick-terminals and DIN rails in double insulated assembly
	Mounting plates
Delivery forms	Enclosure with door
	Labelling system included in the scope of delivery
Accessories	Cable entry covers
	Lock replacement parts

Subdistribution boards

ComfortLine Compact CA distribution boards

For wall-mounting with distribution panels and sheet steel door

Article	PW	Rows	Modules	External dimensions H × W × D (mm)	Type	Order code	Price
For DIN rail devices with N/PE quick terminals, DIN rail distance 125 mm							
CA13V	1	3	36	500 × 300 × 160	CA13V	2CPX052180R9999	
		4	48	650 × 300 × 160	CA14V	2CPX052181R9999	
		5	60	800 × 300 × 160	CA15V	2CPX052182R9999	
		6	72	950 × 300 × 160	CA16V	2CPX052183R9999	
CA24V	2	3	72	500 × 550 × 160	CA23V	2CPX052184R9999	
		4	96	650 × 550 × 160	CA24V	2CPX052185R9999	
		5	120	800 × 550 × 160	CA25V	2CPX052186R9999	
		6	144	950 × 550 × 160	CA26V	2CPX052187R9999	
		7	168	1 100 × 550 × 160	CA27V	2CPX052188R9999	
		8	192	1 250 × 550 × 160	CA28V	2CPX052189R9999	
CA35V	3 (2/1)	4	144	650 × 800 × 160	CA34V	2CPX052190R9999	
		5	180	800 × 800 × 160	CA35V	2CPX052191R9999	
		6	216	950 × 800 × 160	CA36V	2CPX052192R9999	
		7	252	1 100 × 800 × 160	CA37V	2CPX052193R9999	
		8	288	1 250 × 800 × 160	CA38V	2CPX052194R9999	
CA45V	4 (2/2)	5	240	800 × 1 050 × 160	CA45V	2CPX052195R9999	

Subdistribution boards

ComfortLine Compact CA distribution boards

For wall-mounting with distribution panels and sheet steel door

Article	PW	Rows	Modules	External dimensions H × W × D (mm)	Type	Order code	Price
For DIN rail devices with N/PE quick terminals, DIN rail distance 150 mm							
CA14R	1	3	36	650 × 300 × 160	CA14R	2CPX052229R9999	
		4	48	800 × 300 × 160	CA15R	2CPX052230R9999	
		5	60	950 × 300 × 160	CA16R	2CPX052231R9999	
		6	72	1 100 × 300 × 160	CA17R	2CPX052232R9999	
		7	84	1 250 × 300 × 160	CA18R	2CPX052233R9999	
CA23R	2	2	48	500 × 550 × 160	CA23R	2CPX052234R9999	
		3	72	650 × 550 × 160	CA24R	2CPX052235R9999	
		4	96	800 × 550 × 160	CA25R	2CPX052236R9999	
		5	120	950 × 550 × 160	CA26R	2CPX052237R9999	
		6	144	1 100 × 550 × 160	CA27R	2CPX052238R9999	
		7	168	1 250 × 550 × 160	CA28R	2CPX052239R9999	
CA34R	3 (2/1)	3	108	650 × 800 × 160	CA34R	2CPX052240R9999	
		4	144	800 × 800 × 160	CA35R	2CPX052241R9999	
		5	180	950 × 800 × 160	CA36R	2CPX052242R9999	
		6	216	1 100 × 800 × 160	CA37R	2CPX052243R9999	
		7	252	1 250 × 800 × 160	CA38R	2CPX052244R9999	
CA45R	4 (2/2)	4	192	800 × 1 050 × 160	CA45R	2CPX052245R9999	
For DIN rail devices with N/PE screw terminals, DIN rail distance 150 mm, with closing flange							
CA34RZ1	1	3	36	650 × 300 × 160	CA14RZ1	2CPX052277R9999	
		4	48	800 × 300 × 160	CA15RZ1	2CPX052278R9999	
		5	60	950 × 300 × 160	CA16RZ1	2CPX052279R9999	
	2	2	48	500 × 550 × 160	CA23RZ1	2CPX052280R9999	
		3	72	650 × 550 × 160	CA24RZ1	2CPX052281R9999	
		4	96	800 × 550 × 160	CA25RZ1	2CPX052282R9999	
		5	120	950 × 550 × 160	CA26RZ1	2CPX052283R9999	
	3 (2/1)	3	108	650 × 800 × 160	CA34RZ1	2CPX052285R9999	
		4	144	800 × 800 × 160	CA35RZ1	2CPX052286R9999	
		5	180	950 × 800 × 160	CA36RZ1	2CPX052287R9999	
		6	216	1 100 × 800 × 160	CA37RZ1	2CPX052288R9999	
	4 (2/2)	4	192	800 × 1 050 × 160	CA45RZ1	2CPX052289R9999	

Subdistribution boards

ComfortLine Compact CA distribution boards

For wall-mounting with distribution panel and door

Article	PW	Rows	Modules	External dimensions H × W × D (mm)	Type	Order code	Price
For DIN rail devices 24 Modules per row, with PEQuick-terminals, DIN rail distance 150 mm, with closing flange and opaque door							
CA25RE	2	3	72	650 × 300 × 160	CA24RE	2CPX052585R9999	
		4	96	800 × 300 × 160	CA25RE	2CPX052586R9999	
		5	120	950 × 300 × 160	CA26RE	2CPX052587R9999	
		6	144	1 100 × 300 × 160	CA27RE	2CPX052588R9999	
		7	168	1 250 × 30 × 160	CA28RE	2CPX052589R9999	
CA25RTE	2	3	72	650 × 300 × 160	CA24RTE	2CPX052580R9999	
		4	96	800 × 300 × 160	CA25RTE	2CPX052581R9999	
		5	120	950 × 300 × 160	CA26RTE	2CPX052582R9999	
		6	144	1 100 × 300 × 160	CA27RTE	2CPX052583R9999	
		7	168	1 250 × 30 × 160	CA28RTE	2CPX052584R9999	

Subdistribution boards

ComfortLine Compact CA distribution boards

For wall-mounting with distribution panels and sheet steel door

Article	PW	Rows	RK/GUG	Modules	External dimensions H × W × D (mm)	Type	Order code	Price
For DIN rail devices (GUG) and terminal blocks (RK), DIN rail distance 125 mm								
CA25K	2	5	2/3	72	800 × 550 × 160	CA25K	2CPX052290R9999	
		6	2/4	96	950 × 550 × 160	CA26K	2CPX052291R9999	
		7	3/4	96	1 100 × 550 × 160	CA27K	2CPX052292R9999	
		7	2/5	120	1 100 × 550 × 160	CA27K2	2CPX052564R9999	
		8	3/5	120	1 250 × 550 × 160	CA28K	2CPX052293R9999	
CA35K	3 (2/1)	5	2/3	108	800 × 800 × 160	CA35K	2CPX052294R9999	
		6	2/4	144	950 × 800 × 160	CA36K	2CPX052295R9999	
		7	3/4	144	1 100 × 800 × 160	CA37K	2CPX052296R9999	
		7	2/5	180	1 100 × 800 × 160	CA37K2	2CPX052565R9999	
		8	3/5	180	1 250 × 800 × 160	CA38K	2CPX052297R9999	
CA46K	4 (2/2)	5	2/3	144	800 × 1050 × 160	CA45K	2CPX052298R9999	
		6	2/4	192	950 × 1050 × 160	CA46K	2CPX052299R9999	
		7	2/5	240	1100 x 1050 x160	CA47K2	2CPX052561R9999	
For DIN rail devices with N/PE quick terminals and mounting plate, DIN rail distance 125 mm								
CA24VP	2 (1/1)	4		48	650 × 550 × 160	CA24VP	2CPX052300R9999	
CA35VP	3 (2/1)	5		120	800 × 800 × 160	CA35VP	2CPX052301R9999	

Subdistribution boards

ComfortLine Compact CA distribution boards
With distribution panels and media panel

Technical specifications	
Standards/regulations	DIN EN 61439-1/-3
Protection class	II, double insulated
	I, earthed in connection with earthing set (accessories)
Protection class	With sheet steel door IP44
	With sheet steel door ventilated IP30
	With sheet steel door ventilated and plastic insert IP30
Mechanical impact strength	IK07
Rated current	I_{nA} up to 125 A

Product features	
Enclosures and doors	Made of sheet steel, colour white RAL 9016, powder-coated
	With depth level compensation
	One top mounted membrane flange per panel width
	Door opening angle 120°
	Double-wing doors on cabinets with three or more panel widths
	Doors with espagnolette closure
	Plastic covers for distribution board panels
	With cable strain relief
Internal configuration options	DIN rail spacing 125 mm
	Panels for rail mounting devices with N/PE Quick-terminals (1x ZK221 per panel width)
	Perforated sheet steel mounting plates preassembled
Delivery forms	Enclosure with door
	Labelling system included in the scope of delivery
	Wire holders included in the scope of delivery
Accessories	Cable entry covers
	Lock replacement parts
	Power plugs
	Patchpanel

Subdistribution boards

ComfortLine Compact CA distribution boards

With distribution panels and media panel

Article	PW	Rows	Modules	External dimensions H × W × D (mm)	Type	Order code	Price
Multimedia enclosures for wall-mounting with integrated media panel, DIN rail distance 125 mm							
CA24VM	Sheet steel door IP44						
	2	3	36	500 × 550 × 160	CA23VM	2CPX052205R9999	
		4	48	650 × 550 × 160	CA24VM	2CPX052206R9999	
		5	60	800 × 550 × 160	CA25VM	2CPX052207R9999	
		6	72	950 × 550 × 160	CA26VM	2CPX052208R9999	
		7	84	1 100 × 550 × 160	CA27VM	2CPX052209R9999	
		8	96	1 250 × 550 × 160	CA28VM	2CPX052210R9999	
	Sheet steel door with ventilation holes IP30						
	2	4	48	650 × 550 × 160	CA24VML	2CPX052211R9999	
		5	60	800 × 550 × 160	CA25VML	2CPX052212R9999	
		6	72	950 × 550 × 160	CA26VML	2CPX052213R9999	
		7	84	1 100 × 550 × 160	CA27VML	2CPX052214R9999	
		8	96	1 250 × 550 × 160	CA28VML	2CPX052215R9999	
	Sheet steel door with ventilation holes and plastic inserts partially transparent white for improved WiFi signal IP30						
	2	4	48	650 × 550 × 160	CA24VMW	2CPX052220R9999	
		5	60	800 × 550 × 160	CA25VMW	2CPX052221R9999	
		6	72	950 × 550 × 160	CA26VMW	2CPX052222R9999	
		7	84	1 100 × 550 × 160	CA27VMW	2CPX052223R9999	
		8	96	1 250 × 550 × 160	CA28VMW	2CPX052224R9999	
CA35VML	Sheet steel door with ventilation holes IP30						
	3 (2/1)	5	120	800 × 800 × 160	CA35VML	2CPX052216R9999	
		6	144	950 × 800 × 160	CA36VML	2CPX052217R9999	
		7	168	1 100 × 800 × 160	CA37VML	2CPX052218R9999	
		8	192	1 250 × 800 × 160	CA38VML	2CPX052219R9999	
	Sheet steel door with ventilation holes and plastic inserts partially transparent white for improved WiFi signal IP30						
	3 (2/1)	5	120	800 × 800 × 160	CA35VMW	2CPX052225R9999	
		6	144	950 × 800 × 160	CA36VMW	2CPX052226R9999	
		7	168	1 100 × 800 × 160	CA37VMW	2CPX052227R9999	
		8	192	1 250 × 800 × 160	CA38VMW	2CPX052228R9999	

Subdistribution boards

ComfortLine Compact CA distribution boards
For wall-mounting, empty cabinets with door

CA24

Technical specifications	
Standards/regulations	DIN EN 61439-1/-3
Protection class	II, double insulated
	I, earthed in connection with earthing set (accessories)
Protection class	With sheet steel door up to IP44
	Without door IP30*
Mechanical impact strength	IK07
Rated current	I_{nA} up to 125 A

Product features	
Enclosures and doors	Made of sheet steel, colour white RAL 9016, powder-coated
	With depth level compensation
	One top mounted membrane flange per panel width
	Door opening angle 120°
	Double-wing doors on cabinets with three or more panel widths
	Doors with espagnolette closure
	With cable strain relief
Internal configuration options	Prepared to be fitted with CombiLine modules, distribution panels and media panels
	Without N/PE Quick-terminals
Delivery forms	Enclosure with door
Accessories	Cable entry covers
	Lock replacement parts
	Media panels
	Distribution panels
	CombiLine modules

* For an internal configuration as sub-distribution board with distribution panels or CombiLine modules

Subdistribution boards

ComfortLine Compact CA distribution boards

For wall-mounting, empty cabinets with door

Article	PW	Rows	Modules	External dimensions H × W × D (mm)	Type	Order code	Price
	1	3	36	500 × 300 × 160	CA13	2CPX052142R9999	
		4	48	650 × 300 × 160	CA14	2CPX052143R9999	
		5	60	800 × 300 × 160	CA15	2CPX052144R9999	
		6	72	950 × 300 × 160	CA16	2CPX052145R9999	
		7	84	1 100 × 300 × 160	CA17	2CPX052146R9999	
		8	96	1 250 × 300 × 160	CA18	2CPX052147R9999	
CA13							
	2	3	72	500 × 550 × 160	CA23	2CPX052148R9999	
		4	96	650 × 550 × 160	CA24	2CPX052149R9999	
		5	120	800 × 550 × 160	CA25	2CPX052150R9999	
		6	144	950 × 550 × 160	CA26	2CPX052151R9999	
		7	168	1 100 × 550 × 160	CA27	2CPX052152R9999	
		8	192	1 250 × 550 × 160	CA28	2CPX052153R9999	
CA24							
	3	4	144	650 × 800 × 160	CA34	2CPX052154R9999	
		5	180	800 × 800 × 160	CA35	2CPX052155R9999	
		6	216	950 × 800 × 160	CA36	2CPX052156R9999	
		7	252	1 100 × 800 × 160	CA37	2CPX052157R9999	
		8	288	1 250 × 800 × 160	CA38	2CPX052158R9999	
CA35							
	4	5	240	800 × 1 050 × 160	CA45	2CPX052159R9999	
		6	288	950 × 1 050 × 160	CA46	2CPX052160R9999	
		7	336	1100 x 1050 x 160	CA47	2CPX052567R9999	
CA46							

> CombiLine modules and distribution panels, see main catalogue

Subdistribution boards

ComfortLine Compact CA distribution boards
For wall-mounting, empty cabinets without door

CA24B

Technical specifications	
Standards/regulations	DIN EN 61439-1/-3
Protection class	II, double insulated
	I, earthed in connection with earthing set (accessories)
Protection class	With sheet steel door IP44
	With transparent door IP44
	With ventilation holes IP30
	With plastic insert and ventilation holes (WiFi-door) IP30
	Without door IP30*
Mechanical impact strength	IK07
Rated current	I_{nA} up to 125 A

Product features	
Enclosures and doors	Made of sheet steel, colour white RAL 9016, powder-coated
	With depth level compensation
	One top mounted membrane flange per panel width
	With cable strain relief
Internal configuration options	Prepared to be fitted with CombiLine modules, distribution panels and media panels
	Without N/PE Quick-terminals
Delivery forms	Enclosure without door
Accessories	Cable entry covers
	Lock replacement parts
	Sheet steel- and transparent doors
	Media panels
	Distribution panels
	CombiLine modules

* For an internal configuration as sub-distribution board with distribution panels or CombiLine modules

Subdistribution boards

ComfortLine Compact CA distribution boards

For wall-mounting, empty cabinets without door

Article	PW	Rows	Modules	External dimensions H × W × D (mm)	Type	Order code	Price
CA13B	1	3	36	500 × 300 × 160	CA13B	2CPX052161R9999	
		4	48	650 × 300 × 160	CA14B	2CPX052162R9999	
		5	60	800 × 300 × 160	CA15B	2CPX052163R9999	
		6	72	950 × 300 × 160	CA16B	2CPX052164R9999	
		7	84	1 100 × 300 × 160	CA17B	2CPX052165R9999	
		8	96	1 250 × 300 × 160	CA18B	2CPX052166R9999	
CA24B	2	3	72	500 × 550 × 160	CA23B	2CPX052167R9999	
		4	96	650 × 550 × 160	CA24B	2CPX052168R9999	
		5	120	800 × 550 × 160	CA25B	2CPX052169R9999	
		6	144	950 × 550 × 160	CA26B	2CPX052170R9999	
		7	168	1 100 × 550 × 160	CA27B	2CPX052171R9999	
		8	192	1 250 × 550 × 160	CA28B	2CPX052172R9999	
CA35B	3	4	144	650 × 800 × 160	CA34B	2CPX052173R9999	
		5	180	800 × 800 × 160	CA35B	2CPX052174R9999	
		6	216	950 × 800 × 160	CA36B	2CPX052175R9999	
		7	252	1 100 × 800 × 160	CA37B	2CPX052176R9999	
		8	288	1 250 × 800 × 160	CA38B	2CPX052177R9999	
CA46B	4	5	240	800 × 1 050 × 160	CA45B	2CPX052178R9999	
		6	288	950 × 1 050 × 160	CA46B	2CPX052179R9999	
		7	336	1100 x 1050 x 160	CA47B	2CPX052568R9999	

> CombiLine modules and distribution panels, see main catalogue

Subdistribution boards

ComfortLine Compact CU distribution boards for flush and hollow wall mounting* with distribution panels, frames and sheet steel doors.

CU24V

Technical data	
Standards/regulations	DIN EN 61439-1/-3 (VDE 0660-600-1/-3)
Protection class	II, insulated
	I, grounded in connection with earthing set (accessories)
Degree of protection	IP30
Shock resistance level	IK09
Rated current	I_n up to 125 A

Product features	
Enclosures and doors	Galvanized steel masonry box
	Made of sheet steel, color white RAL 9016, powder-coated
	120° door opening angle
	From 3-field width double door cabinets
	Doors with espagnolette closure
	With cable pull/tension mount
Internal configuration options	DIN rail spacing 125 mm/150 mm
	Fields for DIN rail devices with DIN rails of 35 x 7,5 mm and N/PE Quick-terminals (1 x ZK224 per field width)
	Fields with mounting plates
	Fields for terminal blocks with DIN rails of 35 x 7,5 mm insulated mounted (without N/PE Quick-terminals)
Delivery types	Cabinet with frame and door
	Frame with 25 mm of plaster compensation
	Top and bottom cable entry sliders included per field width
	Labeling system included
Accessories	Hollow wall mounting kit for flush mounted cabinets
	Lock replacement parts

* in connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages

Subdistribution boards

ComfortLine Compact CU distribution boards for flush and hollow wall mounting* with distribution panels, frames and sheet steel doors.

Article	PW	Rows	Modules	Wall cut-out dimensions H x W x D in mm	Frame dimensions H x W x D in mm	Pieces	Type	Order code
	For DIN rail devices, DIN rail distance 125 mm							
CU14V	1	4	48	698 x 311 x 110	715 x 365 x 15	1	CU14V	2CPX052607R9999
		5	60	848 x 311 x 110	865 x 365 x 15	1	CU15V	2CPX052608R9999
		6	72	998 x 311 x 110	1015 x 365 x 15	1	CU16V	2CPX052609R9999
		7	84	1148 x 311 x 110	1165 x 365 x 15	1	CU17V	2CPX052610R9999
		8	96	1298 x 311 x 110	1315 x 365 x 15	1	CU18V	2CPX052611R9999
CU24V	2	3	72	548 x 561 x 110	565 x 615 x 15	1	CU23V	2CPX052612R9999
		4	96	698 x 561 x 110	715 x 615 x 15	1	CU24V	2CPX052613R9999
		5	120	848 x 561 x 110	865 x 615 x 15	1	CU25V	2CPX052614R9999
		6	144	998 x 561 x 110	1015 x 615 x 15	1	CU26V	2CPX052615R9999
		7	168	1148 x 561 x 110	1165 x 615 x 15	1	CU27V	2CPX052616R9999
		8	192	1298 x 561 x 110	1315 x 615 x 15	1	CU28V	2CPX052617R9999
CU34V	3	4	144	698 x 811 x 110	715 x 865 x 15	1	CU34V	2CPX052618R9999
		5	180	848 x 811 x 110	865 x 865 x 15	1	CU35V	2CPX052619R9999
		6	216	998 x 811 x 110	1015 x 865 x 15	1	CU36V	2CPX052620R9999
		7	252	1148 x 811 x 110	1165 x 865 x 15	1	CU37V	2CPX052621R9999
CU45V	4	5	240	848 x 1061 x 110	865 x 1115 x 15	1	CU45V	2CPX052622R9999

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages

Subdistribution boards

ComfortLine Compact CU distribution boards for flush and hollow wall mounting* with distribution panels, frames and sheet steel doors.

Article	PW	Rows	Modules	Wall cut-out dimensions H x W x D in mm	Frame dimensions H x W x D in mm	Pieces	Type	Order code
	For DIN rail devices, DIN rail distance 150 mm							
CU24R	2	4	72	698 x 561 x 110	715 x 615 x 15	1	CU24R	2CPX052600R9999
		5	96	848 x 561 x 110	865 x 615 x 15	1	CU25R	2CPX052601R9999
		6	120	998 x 561 x 110	1015 x 615 x 15	1	CU26R	2CPX052602R9999
		7	168	1148 x 561 x 110	1165 x 615 x 15	1	CU27R	2CPX052603R9999
		8	192	1298 x 561 x 110	1315 x 615 x 15	1	CU28R	2CPX052604R9999
CU36R	3	6	216	998 x 811 x 110	1015 x 865 x 15	1	CU36R	2CPX052605R9999
		7	288	1148 x 811 x 110	1165 x 865 x 15	1	CU37R	2CPX052606R9999

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages

Article	PW	Rows	Modules	Wall cut-out dimensions H x W x D in mm	Frame dimensions H x W x D in mm	Pieces	Type	Order code
	For DIN rail devices 24 Modules per row, DIN rail distance 150 mm, with opaque door**							
CU25RE	2	3	72	698 x 561 x 110	715 x 615 x 15	1	CU24RE	2CPX052595R9999
		4	96	848 x 561 x 110	865 x 615 x 15	1	CU25RE	2CPX052596R9999
		5	120	998 x 561 x 110	1015 x 615 x 15	1	CU26RE	2CPX052597R9999
		6	144	1148 x 561 x 110	1165 x 615 x 15	1	CU27RE	2CPX052598R9999
		7	168	1298 x 561 x 110	1315 x 615 x 15	1	CU28RE	2CPX052599R9999
	For DIN rail devices 24 Modules per row, DIN rail distance 150 mm, with transparent door**							
CU25RTE	2	3	72	698 x 561 x 110	715 x 615 x 15	1	CU24RTE	2CPX052590R9999
		4	96	848 x 561 x 110	865 x 615 x 15	1	CU25RTE	2CPX052591R9999
		5	120	998 x 561 x 110	1015 x 615 x 15	1	CU26RTE	2CPX052592R9999
		6	144	1148 x 561 x 110	1165 x 615 x 15	1	CU27RTE	2CPX052593R9999
		7	168	1298 x 561 x 110	1315 x 615 x 15	1	CU28RTE	2CPX052594R9999

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages
** PE Quick-terminlas in scope of delivery - N terminals available as accessories

Subdistribution boards

ComfortLine Compact CU distribution boards for flush and hollow wall mounting* with distribution panels, frames and sheet steel doors.

Article	PW	Rows	RK/ GUG	Modules	Wall cut-out dimensions H x W x D in mm	Frame dimensions H x W x D in mm	Pieces	Type	Order code
	For DIN rail devices and terminal blocks, DIN rail distance 125 mm								
CU25K	2	5	2/3	72	848 x 561 x 110	865 x 615 x 15	1	CU25K	2CPX052623R9999
		6	2/4	96	998 x 561 x 110	1015 x 615 x 15	1	CU26K	2CPX052624R9999
		7	2/5	96	1148 x 561 x 110	1165 x 615 x 15	1	CU27K	2CPX052625R9999
CU35K	3	5	2/3	108	848 x 811 x 110	865 x 865 x 15	1	CU35K	2CPX052626R9999
		6	2/4	144	998 x 811 x 110	1015 x 865 x 15	1	CU36K	2CPX052627R9999
		7	2/5	144	1148 x 811 x 110	1165 x 865 x 15	1	CU37K	2CPX052628R9999
CU46K	4	6	2/4	192	998 x 1061 x 110	1015 x 1115 x 15	1	CU46K	2CPX052629R9999
	For DIN rail devices and mounting plate, DIN rail distance 125 mm								
CU-24VP	2 (1/1)	4		48	698 x 561 x 110	715 x 615 x 15	1	CU24VP	2CPX052685R9999
CU-35VP	3 (2/1)	5		120	848 x 811 x 110	865 x 865 x 15	1	CU35VP	2CPX052686R9999

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages

Subdistribution boards

ComfortLine Compact CU distribution boards For flush and hollow wall mounting* with media unit with frame and multiple door options.

CU24VM

Technical data	
Standards/regulations	DIN EN 61439-1/-3 (VDE 0660-600-1/-3)
Protection class	II, insulated
	I, grounded in connection with earthing set (accessories)
Degree of protection	With sheet steel door IP30
	With sheet steel door ventilated IP30
	With sheet steel door ventilated and plastic insert IP30
Shock resistance level	IK09 with sheet steel door; IK07 semi-transparent/transparent doors
Rated current	I_n up to 125 A

Product features	
Enclosures and doors	Galvanized steel masonry box
	Made of sheet steel, color white RAL 9016, powder-coated
	120° door opening angle
	From 3-field width double door cabinets
	Doors with espagnolette closure
	With cable pull/tension mount
Internal configuration options	DIN rail spacing 125 mm
	Fields for DIN rail devices with DIN rails of 35 x 7,5 mm and N/PE Quick-terminals (1 x ZK224 per field width)
	Pre-assembled perforated sheet mounting plate
Delivery types	Cabinet with frame and door
	Frame with 25 mm of plaster compensation
	Top and bottom cable entry sliders included per field width
	Labeling system included
Accessories	Hollow wall set for flush-mounted cabinets
	Lock replacement parts
	Sockets
	Patch panel

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages

Subdistribution boards

ComfortLine Compact CU distribution boards For flush and hollow wall mounting* with media unit with frame and multiple door options.

Article	PW	Rows	Modules	Wall cut-out dimensions H x W x D in mm	Frame dimensions H x W x D in mm	Pieces	Type	Order code
	Media unit with integrated media panels, DIN rail distance 125 mm							
	Sheet steel door, IP30							
CU24VM	2 (1/1)	4	48	698 x 561 x 110	715 x 615 x 15	1	CU24VM	2CPX052664R9999
		5	60	848 x 561 x 110	865 x 615 x 15	1	CU25VM	2CPX052665R9999
		6	72	998 x 561 x 110	1015 x 615 x 15	1	CU26VM	2CPX052666R9999
		7	84	1148 x 561 x 110	1165 x 615 x 15	1	CU27VM	2CPX052667R9999
	3 (2/1)	4	96	698 x 811 x 110	715 x 865 x 15	1	CU34VM	2CPX052668R9999
		5	120	848 x 811 x 110	865 x 865 x 15	1	CU35VM	2CPX052669R9999
		6	144	998 x 811 x 110	1015 x 865 x 15	1	CU36VM	2CPX052670R9999
	Sheet steel door with ventilation slots, IP30							
CU24VML	2 (1/1)	4	48	698 x 561 x 110	715 x 615 x 15	1	CU24VML	2CPX052671R9999
		5	60	848 x 561 x 110	865 x 615 x 15	1	CU25VML	2CPX052672R9999
		6	72	998 x 561 x 110	1015 x 615 x 15	1	CU26VML	2CPX052673R9999
		7	84	1148 x 561 x 110	1165 x 615 x 15	1	CU27VML	2CPX052674R9999
	3 (2/1)	4	96	698 x 811 x 110	715 x 865 x 15	1	CU34VML	2CPX052675R9999
		5	120	848 x 811 x 110	865 x 865 x 15	1	CU35VML	2CPX052676R9999
		6	144	998 x 811 x 110	1015 x 865 x 15	1	CU36VML	2CPX052677R9999
	Sheet steel door with ventilation slots and plastic insert semi-transparent, white, for improved WiFi signal, IP30							
CU24VMW	2 (1/1)	4	48	698 x 561 x 110	715 x 615 x 15	1	CU24VMW	2CPX052678R9999
		5	60	848 x 561 x 110	865 x 615 x 15	1	CU25VMW	2CPX052679R9999
		6	72	998 x 561 x 110	1015 x 615 x 15	1	CU26VMW	2CPX052680R9999
		7	84	1148 x 561 x 110	1165 x 615 x 15	1	CU27VMW	2CPX052681R9999
	3 (2/1)	4	96	698 x 811 x 110	715 x 865 x 15	1	CU34VMW	2CPX052682R9999
		5	120	848 x 811 x 110	865 x 865 x 15	1	CU35VMW	2CPX052683R9999
		6	144	998 x 811 x 110	1015 x 865 x 15	1	CU36VMW	2CPX052684R9999

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages

Subdistribution boards

ComfortLine Compact CU distribution boards. For flush and hollow wall mounting*, empty cabinets with frame and sheet steel doors.

CU24

Technical data	
Standards/regulations	DIN EN 61439-1/-3 (VDE 0660-600-1/-3)
Protection class	II, insulated
	I, grounded in connection with earthing set (accessories)
Degree of protection	IP30
Shock resistance level	IK09
Rated current	I_n bis 125 A

Product features	
Enclosures and doors	Galvanized steel masonry box
	Made of sheet steel, color white RAL 9016, powder-coated
	120° door opening angle
	From 3-field width double door cabinets
	Doors with espagnolette closure
	With cable pull/tension mount
Internal configuration options	Prepared for expansion with CombiLine modules, distribution panels, and media panels
	Without N/PE Quick-terminals
Delivery types	Cabinet with frame and door
	Frame with 25 mm of plaster compensation
	Top and bottom cable entry sliders included per field width
	Labeling system included
Accessories	Hollow wall set for flush-mounted cabinets
	Lock replacement parts
	Media fields
	Distribution panels
	CombiLine modules

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages

Subdistribution boards

ComfortLine Compact CU distribution boards. For flush and hollow wall mounting*, empty cabinets with blend frame and sheet steel doors.

Article	PW	Rows	Modules	Wall cut-out dimensions H x W x D in mm	Frame dimensions H x W x D in mm	Pieces	Type	Order code
CU14	1	4	48	698 x 311 x 110	715 x 365 x 15	1	CU14	2CPX052630R9999
		5	60	848 x 311 x 110	865 x 365 x 15	1	CU15	2CPX052631R9999
		6	72	998 x 311 x 110	1015 x 365 x 15	1	CU16	2CPX052632R9999
		7	84	1148 x 311 x 110	1165 x 365 x 15	1	CU17	2CPX052633R9999
		8	96	1298 x 311 x 110	1315 x 365 x 15	1	CU18	2CPX052634R9999
CU24	2	3	72	548 x 561 x 110	565 x 615 x 15	1	CU23	2CPX052635R9999
		4	96	698 x 561 x 110	715 x 615 x 15	1	CU24	2CPX052636R9999
		5	120	848 x 561 x 110	865 x 615 x 15	1	CU25	2CPX052637R9999
		6	144	998 x 561 x 110	1015 x 615 x 15	1	CU26	2CPX052638R9999
		7	168	1148 x 561 x 110	1165 x 615 x 15	1	CU27	2CPX052639R9999
		8	192	1298 x 561 x 110	1315 x 615 x 15	1	CU28	2CPX052640R9999
CU35	3	4	144	698 x 811 x 110	715 x 865 x 15	1	CU34	2CPX052641R9999
		5	180	848 x 811 x 110	865 x 865 x 15	1	CU35	2CPX052642R9999
		6	216	998 x 811 x 110	1015 x 865 x 15	1	CU36	2CPX052643R9999
		7	252	1148 x 811 x 110	1165 x 865 x 15	1	CU37	2CPX052644R9999
CU46	4	5	240	848 x 1061 x 110	865 x 1115 x 15	1	CU45	2CPX052645R9999
		6	288	998 x 1061 x 110	1015 x 1115 x 15	1	CU46	2CPX052646R9999

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages
> Media fields, see ComfortLine Compact CU, Media and combi fields with perforated sheet mounting plate page
> CombiLine modules, see ComfortLine Compact CU, CombiLine N modules for DIN rail devices on the EDF mounting frame page
> Distribution panels, see Energy efficiency Chapter in our main catalog
> When installing CombiLine modules and distribution panels with 15 mm DIN rails, restrictions on lock and key operations must be taken into account, see the specific page ahead

Subdistribution boards

ComfortLine Compact CU distribution boards. For flush and hollow wall mounting*, empty cabinets with frame, without doors.

CU24B

Technical data	
Standards/regulations	DIN EN 61439-1/-3 (VDE 0660-600-1/-3)
Protection class	II, insulated
	I, grounded in connection with earthing set (accessories)
Degree of protection	IP30
Shock resistance level	IK09 With sheet steel door; IK07 semi-transparent/transparent doors
Rated current	I_n bis 125 A

Product features	
Enclosure and frame	Galvanized steel masonry box
	Made of sheet steel, color white RAL 9016, powder-coated
	With cable pull/tension mount
Internal configuration options	Prepared for expansion with CombiLine modules, distribution panels, and media panels
	Without N/PE Quick-Terminal
Delivery types	Cabinet with frame, without door
	Frame with 25 mm of plaster compensation
	Top and bottom cable entry sliders included per field width
	Labeling system included
Accessories	Hollow wall mounting kit for flush-mounted cabinets
	Sheet steel and transparent doors
	Lock replacement parts
	Media fields
	Distribution panels
	CombiLine modules

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages

Subdistribution boards

ComfortLine Compact CU distribution boards. For flush and hollow wall mounting*, empty cabinets with frame, without doors.

Article	PW	Rows	Modules	Wall cut-out dimensions H x W x D in mm	Frame dimensions H x W x D in mm	Pieces	Type	Order code
CU14B	1	4	48	698 x 311 x 110	715 x 365 x 15	1	CU14B	2CPX052647R9999
		5	60	848 x 311 x 110	865 x 365 x 15	1	CU15B	2CPX052648R9999
		6	72	998 x 311 x 110	1015 x 365 x 15	1	CU16B	2CPX052649R9999
		7	84	1148 x 311 x 110	1165 x 365 x 15	1	CU17B	2CPX052650R9999
		8	96	1298 x 311 x 110	1315 x 365 x 15	1	CU18B	2CPX052651R9999
CU24B	2	3	72	548 x 561 x 110	565 x 615 x 15	1	CU23B	2CPX052652R9999
		4	96	698 x 561 x 110	715 x 615 x 15	1	CU24B	2CPX052653R9999
		5	120	848 x 561 x 110	865 x 615 x 15	1	CU25B	2CPX052654R9999
		6	144	998 x 561 x 110	1015 x 615 x 15	1	CU26B	2CPX052655R9999
		7	168	1148 x 561 x 110	1165 x 615 x 15	1	CU27B	2CPX052656R9999
		8	192	1298 x 561 x 110	1315 x 615 x 15	1	CU28B	2CPX052657R9999
CU35B	3	4	144	698 x 811 x 110	715 x 865 x 15	1	CU34B	2CPX052658R9999
		5	180	848 x 811 x 110	865 x 865 x 15	1	CU35B	2CPX052659R9999
		6	216	998 x 811 x 110	1015 x 865 x 15	1	CU36B	2CPX052660R9999
		7	252	1148 x 811 x 110	1165 x 865 x 15	1	CU37B	2CPX052661R9999
CU46B	4	5	240	848 x 1061 x 110	865 x 1115 x 15	1	CU45B	2CPX052662R9999
		6	288	998 x 1061 x 110	1015 x 1115 x 15	1	CU46B	2CPX052663R9999

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages

> Doors, see ComfortLine Compact CU for flush and hollow wall mounting, Empty cabinets with blend frame and sheet steel doors pages
> Media fields, see ComfortLine Compact CU, Media and combi fields with perforated sheet mounting plate page
> CombiLine modules, see ComfortLine Compact CU, CombiLine N modules for DIN rail devices on the EDF mounting frame page
> Distribution panels, see Energy efficiency Chapter in our main catalog
> When installing CombiLine modules and distribution panels with 15 mm DIN rails, restrictions on lock and key operations must be taken into account, see the specific page ahead

Subdistribution boards

ComfortLine Compact CU distribution boards.
For flush and hollow wall mounting*, with distribution panels and design frames.

CU24VD

Technical data	
Standards/regulations	DIN EN 61439-1/-3 (VDE 0660-600-1/-3)
Protection class	II, insulated
Degree of protection	IP30
Rated current	I_n up to 125 A

Product features	
Gehäuse und Tür	Galvanized steel masonry box
	Made of sheet steel, color white RAL 9016, powder-coated
	Interchangeable design frames, brushed aluminium with glass insert
	120° door opening angle
	Interchangeable design frame with magnetic closure
	With cable pull/tension mount
Internal configuration	DIN rail spacing 125 mm
options	Fields for DIN rail devices with DIN rails of 35 x 7,5 mm and N/PE Quick-terminals (1 x ZK224 per field width)
Delivery types	Cabinet with blend frame and interchangeable design frame
	Frame with 25 mm of plaster compensation
	Top and bottom cable entry sliders included per field width
	Labeling system included
Accessories	Hollow wall set for flush-mounted cabinets

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages

Subdistribution boards

ComfortLine Compact CU distribution boards.
For flush and hollow wall mounting*, with distribution panels and design frames.

Article	PW	Rows	Modules	Wall cut-out dimensions H x W x D in mm	Frame dimensions H x W x D in mm	Pieces	Type	Order code
CU24VD	**With picture frame door,** Brushed aluminium, DIN rail spacing 125 mm							
	2	4	96	698 x 561 x 110	715 x 615 x 15	1	CU24VD	2CPX052687R9999
	2	5	120	848 x 561 x 110	865 x 615 x 15	1	CU25VD	2CPX052688R9999
	2	6	144	998 x 561 x 110	1015 x 615 x 15	1	CU26VD	2CPX052689R9999

* In connection with hollow wall set CZH4, see ComfortLine Compact CU, General accessories pages

Example CU24VD
with illustration picture
(Delivery without picture)

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
Media and combi panel with perforated sheet mounting plate.

1MM2

Article	PW	Rows	Hight x width	Modules	Number of mounting plates	Pieces	Type	Order code
			Media panels for empty compact distribution boards					
	1	3	450 x 250	-	3	1	1MM00	2CPX037485R9999
		4	600 x 250	-	4	1	1MM0	2CPX037486R9999
		5	750 x 250	-	5	1	1MM1	2CPX037487R9999
		6	900 x 250	-	6	1	1MM2	2CPX037488R9999
		7	1050 x 250	-	7	1	1MM3	2CPX037489R9999
		8	1200 x 250	-	8	1	1MM4	2CPX052302R9999
	2	4	600 x 500	-	4	1	2MM0	2CPX037490R9999
		5	750 x 500	-	5	1	2MM1	2CPX037491R9999
		6	900 x 500	-	6	1	2MM2	2CPX037492R9999
		7	1050 x 500	-	7	1	2MM3	2CPX037493R9999
		8	1200 x 500	-	8	1	2MM4	2CPX052303R9999

FC16V2M4

Article	PW	Rows	Hight x width	Modules	Number of mounting plates	Pieces	Type	Order code
			Media-Combi panels for empty compact distribution boards*					
	1	5	750 x 250	24	3	1	FC15V2M3	2CPX052700R9999
		6	900 x 250	24	4	1	FC16V2M4	2CPX052701R9999
		7	1050 x 250	24	5	1	FC17V2M5	2CPX052702R9999
			1050 x 250	36	4	1	FC17V3M4	2CPX052703R9999
		8	1200 x 250	36	5	1	FC18V3M5	2CPX052704R9999

* The EDF profile rails from the distribution and medea areas are isolated from each other, and a horizontal divider is also included.
** If socket ZE227 or ZE228 is assambled, for the last row, there is limited space for DIN devices

Distribution panels Comfortline Compact CU

FV16CU

Article	PW	Rows	Hight x width	Modules	Number of mounting plates	Pieces	Type	Order code
			CU distribution panels with 7,5mm DIN rails for DIN devices					
	1	4	600 x 250	48	4	1	FV14CU	2CPX054495R9999
		5	750 x 250	60	5	1	FV15CU	2CPX054496R9999
		6	900 x 250	72	6	1	FV16CU	2CPX054497R9999
		7	1050 x 250	84	7	1	FV17CU	2CPX054498R9999
		8	1200 x 250	96	8	1	FV18CU	2CPX054499R9999

FV16KCU

Article	PW	Rows	Hight x width	Modules	Number of mounting plates	Pieces	Type	Order code
			CU distribution panels with 7,5mm DIN rails for DIN devices, closed cover uppr section for DIN rail terminals					
	1	5	750 x 250	60 (36)	5	1	FV15KCU	2CPX054500R9999
		6	900 x 250	72 (48)	6	1	FV16KCU	2CPX054501R9999
		7	1200 x 250	84 (60)	7	1	FV17KCU	2CPX054502R9999

* The EDF profile rails from the distribution and medea areas are isolated from each other, and a horizontal divider is also included.
** The distribution panels do not fit into ComfortLine CA in combination with N/PE terminals

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
CombiLine N modules for DIN rail devices on the EDF mounting frame.

MG203

MG423

- Fitting with DIN rails 35 x 15 mm
- For devices according to DIN 43880
- Mounting frame to be ordered separately

Height		Width				Kit unassembled		Assembled built into cabinet	
Rows	mm	PW	mm	Modules	Pieces	Type	Order code	Type	Order code
DIN rail distance 125 mm									
1	150	1	250	12	1	MBG101	2CPX041650R9999	MG101	2CPX041200R9999
		2	500	24	1	MBG201	2CPX041651R9999	MG201	2CPX041201R9999
2	300	1	250	24	1	MBG102	2CPX041653R9999	MG102	2CPX041203R9999
		2	500	48	1	MBG202	2CPX041655R9999	MG202	2CPX041205R9999
3	450	1	250	36	1	MBG103	2CPX041659R9999	MG103	2CPX041209R9999
		2	500	72	1	MBG203	2CPX041661R9999	MG203	2CPX041211R9999
4	600	1	250	48	1	MBG104	2CPX041665R9999	MG104	2CPX041215R9999
		2	500	96	1	MBG204	2CPX041667R9999	MG204	2CPX041217R9999
5	750	1	250	60	1	MBG105	2CPX041671R9999	MG105	2CPX041221R9999
		2	500	120	1	MBG205	2CPX041673R9999	MG205	2CPX041223R9999
DIN rail distance 150 mm									
1	150	1	250	12	1	MBG101	2CPX041650R9999	MG101	2CPX041200R9999
		2	500	24	1	MBG201	2CPX041651R9999	MG201	2CPX041201R9999
2	300	1	250	24	1	MBG412	2CPX041654R9999	MG412	2CPX041204R9999
		2	500	48	1	MBG422	2CPX041656R9999	MG422	2CPX041206R9999
3	450	1	250	36	1	MBG413	2CPX041660R9999	MG413	2CPX041210R9999
		2	500	72	1	MBG423	2CPX041662R9999	MG423	2CPX041212R9999
4	600	1	250	48	1	MBG414	2CPX041666R9999	MG414	2CPX041216R9999
		2	500	96	1	MBG424	2CPX041668R9999	MG424	2CPX041218R9999
5	750	1	250	60	1	MBG415	2CPX041672R9999	MG415	2CPX041222R9999
		2	500	120	1	MBG425	2CPX041674R9999	MG425	2CPX041224R9999

> When installing CombiLine modules and distribution panels with 15 mm DIN rails, restrictions on lock and key operations must be taken into account, see the specific page ahead
> Assembly parts, see ComfortLine Compact CU, EDF mounting parts, vertical profile rails page
> Closure strip, see ComfortLine Compact CU, General accessories pages

AS211

MBG2011

Height		Width					Kit unassembled	
Rows	mm	PW	mm	Modules	Pieces		Type	Order code
Cover and CombiLine module 150mm DIN rail spacing								
1	150	2	500	24	1	150 x 500 mm w ith 24 modules slot	AS211	2CPX042904R9999
	150	2	500	24	1	150 x 500 mm w ith 24 modules slot	MBG2011	2CPX042903R9999

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
CombiLine N modules for stain guards and mounting plates.

MB218

- Module as stain guard or for expansion with system components
- Mounting frame to be ordered separately

Height		Width				Kit unassembled		Assembled built into cabinet	
GU	mm	PW	mm	Modules	Pieces	Type	Order code	Type	Order code
1	150	1	250	12	1	MBB116	2CPX041722R9999	MB116	2CPX041257R9999
		2	500	24	1	MBB216	2CPX041723R9999	MB216	2CPX041258R9999
2	300	1	250	24	1	MBB117	2CPX041725R9999	MB117	2CPX041260R9999
		2	500	48	1	MBB217	2CPX041726R9999	MB217	2CPX041261R9999
3	450	1	250	36	1	MBB118	2CPX041728R9999	MB118	2CPX041263R9999
		2	500	72	1	MBB218	2CPX041729R9999	MB218	2CPX041264R9999
4	600	1	250	48	1	MBB119	2CPX041731R9999	MB119	2CPX041266R9999
		2	500	96	1	MBB219	2CPX041732R9999	MB219	2CPX041267R9999
5	750	1	250	60	1	MBB120	2CPX041734R9999	MB120	2CPX041269R9999
		2	500	120	1	MBB220	2CPX041735R9999	MB220	2CPX041270R9999

MB200

- Stain guard
- Covers are not in 150 mm grids
- For each module system field, there must always be 2 units to get back to a grid unit
- Mounting frame to be ordered separately

Height		Width				Kit unassembled		Assembled built into cabinet	
GU	mm	PW	mm	Modules	Pieces	Type	Order code	Type	Order code
0,5	75	1	250	6	1	MBB100	2CPX041427R9999	MB100	2CPX041422R9999
		2	500	12	1	MBB200	2CPX041428R9999	MB200	2CPX041423R9999

MM113K

- Moounting plates made from 2 mm sheet steel
- Fixed mounting plate
- Usable depth of 76 mm
- Usable width for equipment: 1 field width 200 mm
- Mounting frame to be ordered separately

Height		Width				Kit unassembled		Assembled built into cabinet	
GU	mm	PW	mm	Modules	Pieces	Type	Order code	Type	Order code
2	300	1	250	24	1	MBM112K	2CPX041640R9999	MM112K	2CPX041117R9999
3	450	1	250	36	1	MBM113K	2CPX041641R9999	MM113K	2CPX041118R9999
4	600	1	250	48	1	MBM114K	2CPX041642R9999	MM114K	2CPX041119R9999

> When installing CombiLine modules and distribution panels with 15 mm DIN rails, restrictions on lock and key operations must be taken into account, see the specific page ahead
> Mounting frames, see ComfortLine Compact CU, EDF mounting parts, vertical profile rails page

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
CombiLine N modules for terminal blocks and busbar systems 60 mm.

MK108K

- With **horizontally** arranged DIN rails 35 x 7.5 mm
- DIN rails fixed via insulating pieces
- Usable depth of 58 mm
- Usable width for terminal blocks: 1 field width 214 mm, 2 field width 464 mm
- Staggered delivery
- DIN rail spacing 150 mm (can be shifted if required)
- For insulated mounting
- Mounting frame to be ordered separately

Height		Width				Kit unassembled		Assembled built into cabinet	
Rows	mm	PW	mm	Modules	Pieces	Type	Order code	Type	Order code
1	150	1	250	12	1	MBK106K	2CPX041632R9999	MK106K	2CPX041112R9999
		2	500	24	1	MBK206K	2CPX041633R9999	MK206K	2CPX041113R9999
2	300	1	250	24	1	MBK107K	2CPX041634R9999	MK107K	2CPX041114R9999
		2	500	48	1	MBK207K	2CPX041635R9999	MK207K	2CPX041115R9999
3	450	1	250	36	1	MBK108K	2CPX041636R9999	MK108K	2CPX041116R9999

MR102B

MR102

- For **vertical** mounting
- Busbar center distance 60 mm
- For 3-pole busbars
- 32 mm distance between Cu rail and cover
- With type ZX146 type busbar holder
- With type ZX172 cover
- Rated current (I_n) up to max. 125 A
- Mounting frame to be ordered separately

BePiecestes Modul For Betriebsmittel mit vertikal eingebauten Reitersicherungssockeln 3-polig, I_n bis max. 125 A

Height		Width		Elemente			Kit unassembled		Assembled built into cabinet	
GU	mm	PW	mm	D02	Modules	Pieces	Type	Order code	Type	Order code
2	300	1	250	5	24	1	-	-	MR102B	2CPX041409R9999

UnbePiecestes Modul For Betriebsmittel, For den vertikalen Einbau von Reitersicherungssockeln D0 3-polig, I_n bis max. 125 A

Height		Width		Nutzbare Width			Kit unassembled		Assembled, built into cabinet	
GU	mm	PW	mm	mm	Modules	Pieces	Type	Order code	Type	Order code
2	300	1	250	215	24	1	MBR102	2CPX041825R9999	MR102	2CPX041406R9999

MR102H

- Unassembled for equipment for **horizontal** installation of safety brackets
- Busbar center distance 60 mm
- For 3-pole busbars
- 32 mm distance between Cu rail and cover
- With type ZX146 busbar holder
- Rated current (I_n) up to max. 125 A
- Mounting frame to be ordered separately

Height		Width		Cut Height in			Kit unassembled		Assembled built into cabinet	
GU	mm	PW	mm	mm	Modules	Pieces	Type	Order code	Type	Order code
2	300	1	250	134	24	1	MBR102H	2CPX041828R9999	MR102H	2CPX041412R9999

> When installing CombiLine modules and distribution panels with 15 mm DIN rails, restrictions on lock and key operations must be taken into account, see the specific page ahead
> Mounting frames, see ComfortLine Compact CU, EDF mounting parts, vertical profile rails page

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
CombiLine N modules for Tmax breakers, assembled and unassembled.

MA100ALXB

- Pre-assembled with the following breaker: ABB, Tmax XT1, 3-pole
- Fixed installation with toggle drive
- With thermo-magnetic release
- Cover with cut-out
- Mouting on assembly traverse
- Mounting frame to be ordered separately

Height		Width		I_n	Betriebs-mittel			Kit unassembled		Assembled built into cabinet	
GU	mm	PW	mm	A	Type	Modules	Pieces	Type	Order code	Type	Order code
2	300	1	250	100	XT1B160R100	24	1	-	-	MA100ALXB	2CPX041471R9999

MA190T

- Unassembled for ABB breaker, fixed installation 1 x Tmax XT1, 3-/4-polig, (76,2 mm/101,2 mm)
- Cover with cut-out; remaining cut-out must be closed with cover strips
- Rated current (I_n) max. 100 A
- With mooutning traverse including M4 locknuts
- Mounting frame to be ordered separately

Height		Width		Betriebs-mittel	Aus-schnitt Width	Nutzbare Width			Kit unassembled		Assembled built into cabinet	
GU	mm	PW	mm	Type	mm	mm	Modules	Pieces	Type	Order code	Type	Order code
2	300	1	250	XT1	216	199	24	1	MBA190T	2CPX041643R9999	MA190T	2CPX041120R9999

> When installing CombiLine modules and distribution panels with 15 mm DIN rails, restrictions on lock and key operations must be taken into account, see the specific page ahead
> Mounting frames, see ComfortLine Compact CU, EDF mounting parts, vertical profile rails page
> Closure strips, see ComfortLine Compact CU, General accessories pages

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
EDF mounting parts, vertical profile rails.

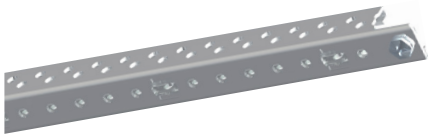

EDM9

- Vertical EDF profile rail
- Incl. fastening screws
- For module assembly

Height			Kit unassembled		Assembled built into cabinet	
GU	**mm**	**Pieces**	**Type**	**Order code**	**Type**	**Order code**
1	150	1	ED7	2CPX041865R9999	EDM7	2CPX041455R9999
		20	ED7P20	2CPX041866R9999	-	-
2	300	1	ED8	2CPX039208R9999	EDM8	2CPX041456R9999
		20	ED8P20	2CPX062311R9999	-	-
3	450	1	ED9	2CPX039209R9999	EDM9	2CPX041457R9999
		20	ED9P20	2CPX062312R9999	-	-
4	600	1	ED10	2CPX039210R9999	EDM10	2CPX041458R9999
		20	ED10P20	2CPX062313R9999	-	-
5	750	1	ED11	2CPX039211R9999	EDM11	2CPX041459R9999
		20	ED11P20	2CPX062314R9999	-	-
6	900	1	ED12	2CPX039212R9999	EDM12	2CPX041460R9999
		20	ED12P20	2CPX062315R9999	-	-
7	1050	1	ED13	2CPX039213R9999	EDM13	2CPX041461R9999
		20	ED13P20	2CPX062316R9999	-	-
8	1200	1	ED14	2CPX039214R9999	EDM14	2CPX041462R9999
		20	ED14P20	2CPX062317R9999	-	-

> For more CombiLine Accessories see ComfortLine Compact CU, General accessories pages and see Energy efficiency Chapter in our main catalog

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
Sheet steel and transparent doors.

CTB24S

CTT24S

Article	PW	GU	To be used with cabinet	Piece	Door without closure Type	Order code	Price	Door with closure Type	Order code
			Doors made of sheet steel						
	1	3	CA13...	1	-	-	-	CTB13S	2CPX052318R9999
		4	CA14..., CU14 ...	1	-	-	-	CTB14S	2CPX052321R9999
		5	CA15..., CU15 ...	1	-	-	-	CTB15S	2CPX052324R9999
		6	CA16..., CU16 ...	1	-	-	-	CTB16S	2CPX052327R9999
		7	CA17..., CU17 ...	1	-	-	-	CTB17S	2CPX052330R9999
		8	CA18..., CA18...	1	-	-	-	CTB18S	2CPX052333R9999
	2	3	CA23 ..., CU23 ...	1	-	-	-	CTB23S	2CPX052319R9999
		4	CA24 ..., CU24 ...	1	-	-	-	CTB24S	2CPX052322R9999
		5	CA25 ..., CU25 ...	1	-	-	-	CTB25S	2CPX052325R9999
		6	CA26 ..., CU26 ...	1	-	-	-	CTB26S	2CPX052328R9999
		7	CA27 ..., CU27 ...	1	-	-	-	CTB27S	2CPX052331R9999
		8	CA28 ..., CU28 ...	1	-	-	-	CTB28S	2CPX052334R9999
	3*	4	CA34 ..., CU34 ...	1	CTB14	2CPX052306R9999	123,00	CTB24S	2CPX052322R9999
		5	CA35 ..., CU35 ...	1	CTB15	2CPX052308R9999	131,00	CTB25S	2CPX052325R9999
		6	CA36 ..., CU36 ...	1	CTB16	2CPX052310R9999	140,00	CTB26S	2CPX052328R9999
		7	CA37 ..., CU37 ...	1	CTB17	2CPX052312R9999	147,00	CTB27S	2CPX052331R9999
		8	CA38 ...	1	CTB18	2CPX052314R9999	166,00	CTB28S	2CPX052334R9999
	4*	5	CA45 ..., CU45 ...	1	CTB25	2CPX052309R9999	172,00	CTB25S	2CPX052325R9999
		6	CA46 ..., CU46 ...	1	CTB26	2CPX052311R9999	188,00	CTB26S	2CPX052328R9999
		7	CA47 ...	1	CTB27	2CPX052313R9999	205,00	CTB27S	2CPX052331R9999
			Transparent doors						
	1	3	CA13 ...	1	-	-	-	CTT13S	2CPX052353R9999
		4	CA14 ..., CU14 ...	1	-	-	-	CTT14S	2CPX052356R9999
		5	CA15 ..., CU15 ...	1	-	-	-	CTT15S	2CPX052359R9999
		6	CA16 ..., CU16 ...	1	-	-	-	CTT16S	2CPX052362R9999
		7	CA17 ..., CU17 ...	1	-	-	-	CTT17S	2CPX052365R9999
		8	CA18 ..., CU18 ...	1	-	-	-	CTT18S	2CPX052368R9999
	2	3	CA23 ..., CU23 ...	1	-	-	-	CTT23S	2CPX052354R9999
		4	CA24 ..., CU24 ...	1	-	-	-	CTT24S	2CPX052357R9999
		5	CA25 ..., CU25 ...	1	-	-	-	CTT25S	2CPX052360R9999
		6	CA26 ..., CU26 ...	1	-	-	-	CTT26S	2CPX052363R9999
		7	CA27 ..., CU27 ...	1	-	-	-	CTT27S	2CPX052366R9999
		8	CA28 ..., CU28 ...	1	-	-	-	CTT28S	2CPX052369R9999
	3*	4	CA34 ..., CU34 ...	1	CTT14	2CPX052341R9999	219,00	CTT24S	2CPX052357R9999
		5	CA35 ..., CU35 ...	1	CTT15	2CPX052343R9999	245,00	CTT25S	2CPX052360R9999
		6	CA36 ..., CU36 ...	1	CTT16	2CPX052345R9999	271,00	CTT26S	2CPX052363R9999
		7	CA37 ..., CU37 ...	1	CTT17	2CPX052347R9999	285,00	CTT27S	2CPX052366R9999
		8	CA38 ..., CU38 ...	1	CTT18	2CPX052349R9999	313,00	CTT28S	2CPX052369R9999
	4*	5	CA45 ..., CU45 ...	1	CTT25	2CPX052344R9999	305,00	CTT25S	2CPX052360R9999
		6	CA46 ..., CU46 ...	1	CTT26	2CPX052346R9999	342,00	CTT26S	2CPX052363R9999
		7	CA47 ...	1	CTT27	2CPX052348R9999	369,00	CTT27S	2CPX052366R9999

*Double doors on cabinets with three or more panel widths

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
Sheet steel doors with ventilation holes and plastic insert.

Article	PW	GU	To be used with cabinet	Piece	Door without closure Type	Order code	Price	Door without closure Type	Order code
			Sheet steel doors with ventilation holes						
CTL24S	1	3	CA13...	1	-	-	-	CTL13S	2CPX052374R9999
		4	CA14..., CU14 ...	1	-	-	-	CTL14S	2CPX052376R9999
		5	CA15..., CU15 ...	1	-	-	-	CTL15S	2CPX052378R9999
		6	CA16..., CU16 ...	1	-	-	-	CTL16S	2CPX052380R9999
		7	CA17..., CU17 ...	1	-	-	-	CTL17S	2CPX052382R9999
		8	CA18..., CA18...	1	-	-	-	CTL18S	2CPX052484R9999
	2	3	CA23 ..., CU23 ...	1	-	-	-	CTL23S	2CPX052375R9999
		4	CA24 ..., CU24 ...	1	-	-	-	CTL24S	2CPX052377R9999
		5	CA25 ..., CU25 ...	1	-	-	-	CTL25S	2CPX052379R9999
		6	CA26 ..., CU26 ...	1	-	-	-	CTL26S	2CPX052381R9999
		7	CA27 ..., CU27 ...	1	-	-	-	CTL27S	2CPX052383R9999
		8	CA28 ..., CU28 ...	1	-	-	-	CTL28S	2CPX052485R9999
	3*	4	CA34 ..., CU34 ...	1	-	-	-	CTL24S	2CPX052377R9999
		5	CA35 ..., CU35 ...	1	-	-	-	CTL25S	2CPX052379R9999
		6	CA36 ..., CU36 ...	1	-	-	-	CTL26S	2CPX052381R9999
		7	CA37 ..., CU37 ...	1	-	-	-	CTL27S	2CPX052383R9999
		8	CA38 ...	1	-	-	-	CTL28S	2CPX052485R9999
	4*	5	CA45 ..., CU45 ...	1	-	-	-	CTL25S	2CPX052379R9999
		6	CA46 ..., CU46 ...	1	-	-	-	CTL26S	2CPX052381R9999
		7	CA47 ...	1	-	-	-	CTL27S	2CPX052383R9999
			Sheet steel doors with semi transparent plastic insert ventilation holes (WiFi-door)						
CTW24S	1	3	CA13 ...	1	-	-	-	CTW13S	2CPX052388R9999
		4	CA14 ..., CU14 ...	1	-	-	-	CTW14S	2CPX052390R9999
		5	CA15 ..., CU15 ...	1	-	-	-	CTW15S	2CPX052392R9999
		6	CA16 ..., CU16 ...	1	-	-	-	CTW16S	2CPX052394R9999
		7	CA17 ..., CU17 ...	1	-	-	-	CTW17S	2CPX052396R9999
		8	CA18 ..., CU18 ...	1	-	-	-	CTW18S	2CPX052486R9999
	2	3	CA23 ..., CU23 ...	1	-	-	-	CTW23S	2CPX052389R9999
		4	CA24 ..., CU24 ...	1	-	-	-	CTW24S	2CPX052391R9999
		5	CA25 ..., CU25 ...	1	-	-	-	CTW25S	2CPX052393R9999
		6	CA26 ..., CU26 ...	1	-	-	-	CTW26S	2CPX052395R9999
		7	CA27 ..., CU27 ...	1	-	-	-	CTW27S	2CPX052397R9999
		8	CA28 ..., CU28 ...	1	-	-	-	CTW28S	2CPX052487R9999
	3*	4	CA34 ..., CU34 ...	1	-	-	-	CTW24S	2CPX052391R9999
		5	CA35 ..., CU35 ...	1	-	-	-	CTW25S	2CPX052393R9999
		6	CA36 ..., CU36 ...	1	-	-	-	CTW26S	2CPX052395R9999
		7	CA37 ..., CU37 ...	1	-	-	-	CTW27S	2CPX052397R9999
		8	CA38 ..., CU38 ...	1	-	-	-	CTW28S	2CPX052487R9999
	4*	5	CA45 ..., CU45 ...	1	-	-	-	CTW25S	2CPX052393R9999
		6	CA46 ..., CU46 ...	1	-	-	-	CTW26S	2CPX052395R9999
		7	CA47 ...	1	-	-	-	CTW27S	2CPX052397R9999

*Double doors on cabinets with three or more panel widths

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
Accessories - Lock replacement parts.

Article		Pieces	Type	Order code
CZT1 CZT2	**Standard closure**[*1] Included in scope of delivery	1	CZT1	2CPX052413R9999
	Safety lock[*1] With two keys	1	CZT2	2CPX052412R9999
CZT23	**Espagnolette closure** In connection with standard closure CZT1 or safety lock CZT2			
	Building height 3 GU	1	CZT23	2CPX052423R9999
	Building height 4 GU	1	CZT24	2CPX052424R9999
	Building height 5 GU	1	CZT25	2CPX052425R9999
	Building height 6 GU	1	CZT26	2CPX052426R9999
	Building height 7 GU	1	CZT27	2CPX052427R9999
	Building height 8 GU	1	CZT28	2CPX052428R9999
CZT23H	**Espagnolette closure** In connection with swivel, latch and restraint handles and actuating thorns			
	For 3 GU (Building height 00)	1	CZT23H	2CPX052416R9999
	For 4 GU (Building height 0)	1	CZT24H	2CPX052417R9999
	For 5 GU (Building height 1)	1	CZT25H	2CPX052418R9999
	For 6 GU (Building height 2)	1	CZT26H	2CPX052419R9999
	For 7 GU (Building height 3)	1	CZT27H	2CPX052420R9999
	For 8 GU (Building height 4)	1	CZT28H	2CPX052421R9999
CZT60	**Installation set**[*1 *2] For operating options in connection with TZ503 to TZ508	1	CZT60	2CPX052414R9999
TZ507	**Latch plate**[*1 *2]			
	Double bit operating pin, 3 mm (standard lock) and 5 mm	1	TZ507	2CPX010491R9999
	For triangular and square operating pin, as well as for Daimler-Benz insert	1	TZ508	2CPX010492R9999
ZH130 ZH132 ZH134 ZH137	**Operating pin**			
	Double bit 3 mm	1	ZH130	2CPX060490R9999
	Double bit 5 mm	1	ZH131	2CPX060491R9999
	Triangle 7 mm	1	ZH132	2CPX060492R9999
	Triangle 8 mm	1	ZH133	2CPX060493R9999
	Square 6 mm	1	ZH134	2CPX060494R9999
	Square 7 mm	1	ZH135	2CPX060495R9999
	Square 8 mm	1	ZH136	2CPX060496R9999
	Daimler-Benz insert	1	ZH137	2CPX060497R9999

*[1] When installing CombiLine modules and distribution panels with 15 mm DIN rails, restrictions on lock and key operations must be taken into account, see the specific page ahead
*[2] Order CZT...H espagnolette closure separately

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
Accessories - Lock replacement parts.

Article		Pieces	Type	Order code
ZH157	**Operating keys**			
	Triangle 7 mm	1	ZH157	2CPX060657R9999
	Triangle 8 mm	1	ZH158	2CPX060658R9999
	Double bit 3 mm	1	ZH160	2CPX060660R9999
	Double bit 5 mm	1	ZH161	2CPX060661R9999
	Square 6 mm	1	ZH162	2CPX060662R9999
	Square 7 mm	1	ZH163	2CPX060663R9999
	Square 8 mm	1	ZH164	2CPX060664R9999
	Daimler-Benz insert	1	ZH165	2CPX060665R9999
ZH91	**Universal key** Double bit 3 and 5 mm Triangle 8 mm Square 6 und 8 mm	1	ZH91	2CPX066091R9999
TZ503 TZ504	**L-handle with key plate**[*1 *2] with lock (EK333)	1	TZ503	2CPX010487R9999
	L-handle with key plate[*1 *2] without lock	1	TZ504	2CPX010488R9999
TZ505 TZ506	**T-handle with key plate**[*1 *2] with lock (EK333)	1	TZ505	2CPX010489R9999
	T-handle with key plate[*1 *2] without lock	1	TZ506	2CPX010490R9999
CZT7	**Swivel handle, sealable**[*1 *2] for profile half cylinders, 40 mm (30/10)	1	CZT5	2CPX052488R9999
	Swivel handle, sealable[*1 *2] With E0 12 closure	1	CZT6	2CPX052430R9999
	Swivel handle, sealable[*1 *2] With Senatsschloss Berlin, simultaneous locking	1	CZT7	2CPX052431R9999
ZH142	**Dummy insert** Instead of profile semi-cylinder, for ZH228 and TZ510 swivel handles	1	ZH142	2CPX060502R9999
CZT10	**Door hinges (plastic)** 1 set consists of 1 x hinges top-left/top-right/bottom-left/bottom-right bottom-left/bottom-right	1	CZT10	2CPX052415R9999
CZT13P2	**Lock Rod guide** 1 set consists of 2 x pieces top/bottom	2	CZT13P2	2CPX054508R9999

*1 When installing CombiLine modules and distribution panels with 15 mm DIN rails, restrictions on lock and key operations must be taken into account, see the specific page ahead
*2 Order CZT...H espagnolette closure separately

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
Accessories for Media cabinets.

Article		Pieces	Type	Order code
 UZM61M	**Perforated mounting plate** Made from sheet steel			
	1 field width	1	UZM61M	2CPX031421R9999
	2 field width	1	UZM62M	2CPX031432R9999
ZX340	**Media device support** For tool-free moutning of devices on the perforated mounting plate; incl. 2 clips for assembly	1	ZX340	2CPX031422R9999
ZEP12	**Universal Patch panel incl. support*** Empty for communication modules, the panel can be used for Keystone and EDAT modules			
	1 field width for 12 Keystone or EDAT modules	1	ZEP12	2CPX054072R9999
	2 field width for 26 Keystone or EDAT modules	1	ZEP24	2CPX054073R9999
ZE338	**Patch panel holder**	1	ZE338	2CPX031426R9999
ZE225	**Double socket** 230 V power supply, with EURO-plug insert; simple installation on the ZX29 mounting cross beam	1	ZE225	2CPX061177R9999
ZX29	**Mounting cross beam for double socket ZE225** To be mounted on the clip holder or on the hole plate of the media unit and the media fields 1MM...	1	ZX29	2CPX061178R9999
ZE227	**Triple socket** 230 V AC voltage, 120° swiveling with EURO inserts to be snapped on to the cable inlet or DIN rail; to be screwed to the mounting plate	1	ZE227	2CPX061211R9999
ZE339	**Media extension kit** Set mit Gerätehalter inkl. 2 Befestigungshaken, Patch panel for 12 Keystone modules*, Triple socket with EURO inserts and wire holders	1	ZE339	2CPX038146R9999

* Dimensions of embossings for Keystone- und EDAT modules see next page

Subdistribution boards

ComfortLine Compact CA/CU distribution boards. Accessories for Media cabinets

Article		Pieces	Type	Order code
ED44P10  ED45P10	**Wire holder** For wire guidance,to be inserted into the DIN rail from the rear			
	Installation depth 28.5 mm	10	ED44P10	2CPX062335R9999
	Installation depth 55 mm	10	ED45P10	2CPX062336R9999
ED59P10	**Din rails adapter** For ED44 and ED 45, to be snapped onto the DIN rall from the front	10	ED59P10	2CPX062339R9999
ED57P10	**Adapter** To assemble the wire holders ED44 and ED45 on the perforated mounting plate	10	ED57P10	2CPX061179R9999
ZX287P10	**Screws** For drillings in perforated mounting plate 3,9 mm x 13 mm	10	ZX287P10	2CPX061180R9999
ZE311 ZE312A	**Keystone modules*** For installation in patch panel			
	RJ45 module			
	Plastic, CAT6	1	ZE311	2CPX038612R9999
	Metal, shielded, CAT6A	1	ZE312A	2CPX038631R9999
ZE316 ZE317	**COAX module** F/F connector	1	ZE316	2CPX039246R9999
	COAX module F/EC connector	1	ZE317	2CPX039247R9999
ZE318 ZE319	**COAX module** F connector/IEC plug	1	ZE318	2CPX039248R9999
	LC module DuSUx/DuSUx connector For multimode fiber Phosphor bronze sleeve	1	ZE319	2CPX039249R9999
ZE310	**Patch module RJ45** For snapping onto the DIN rail, 1 SU	1	ZE310	2CPX038625R9999

* Dimensions of embossings for Keystone and EDAT modules see below

Dimensions of embossings for Keystone and EDAT modules

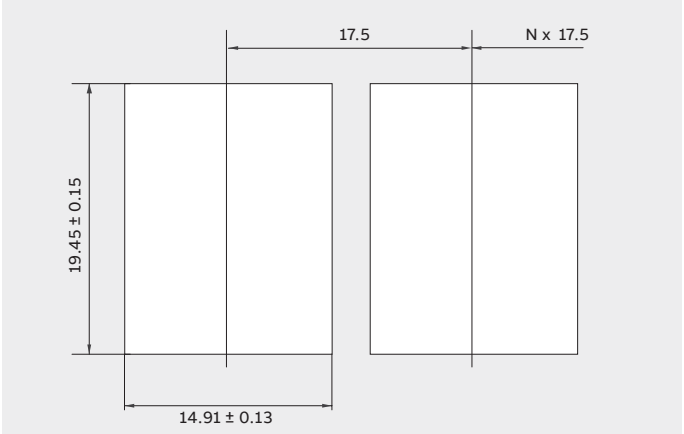

Dimensions of embossings for Keystone modules

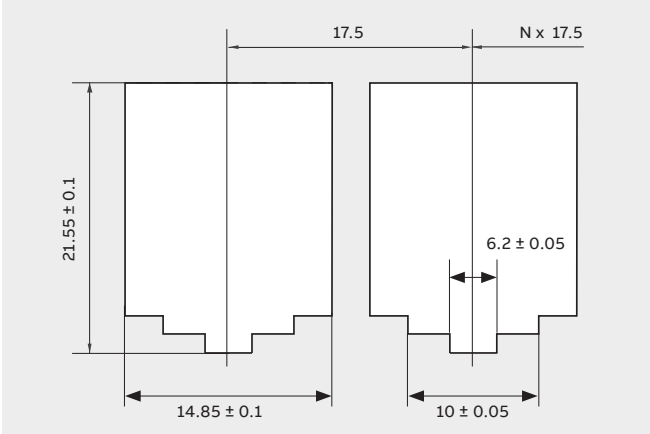

Dimensions of embossings for EDAT modules

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
N/PE quick terminals.

Article	Number of terminals 1.5 - 4 mm²	Number of terminals 2,5 - 25 mm²	External dimensions H x W x D in mm	Pieces	Type	Order code
	N Quick-terminals for Quick-carriers					
ZK113B ZK50BT	5 x 1.5 - 4	0 x 25	23 x 32 x 21	1	ZK50B	2CPX062750R9999
	5 x 1.5 - 4	1 x 25	32 x 32 x 31	1	ZK51B	2CPX062751R9999
	8 x 1.5 - 4	2 x 25	32 x 49 x 31	1	ZK82B	2CPX062752R9999
	11 x 1.5 - 4	3 x 25	32 x 65 x 31	1	ZK113B	2CPX062753R9999
	14 x 1.5 - 4	4 x 25	32 x 82 x 31	1	ZK144B	2CPX062754R9999
	17 x 1.5 - 4	5 x 25	32 x 98 x 31	1	ZK175B	2CPX062755R9999
	20 x 1.5 - 4	6 x 25	32 x 115 x 31	1	ZK206B	2CPX062756R9999
	23 x 1.5 -4	7 x 25	32 x 132 x 31	1	ZK237B	2CPX063163R9999
ZK113G	26 x 1.5 -4	8 x 25	32 x 149 x 31	1	ZK268B	2CPX063164R9999
	N Quick-terminals with adapter ZK15 for lateral assembly in the UK600 and compact distribution board or to snap onto DIN rail					
	5 x 1.5 - 4	0 x 25	28 x 39 x 25	1	ZK50BT	2CPX062745R9999
	PE Quick plug-in terminals for Quick-carriers					
	5 x 1.5 - 4	1 x 25	32 x 32 x 31	1	ZK51G	2CPX062757R9999
	8 x 1.5 - 4	2 x 25	32 x 49 x 31	1	ZK82G	2CPX062758R9999
	11 x 1.5 - 4	3 x 25	32 x 65 x 31	1	ZK113G	2CPX062759R9999
	14 x 1.5 - 4	4 x 25	32 x 82 x 31	1	ZK144G	2CPX062760R9999
	17 x 1.5 - 4	5 x 25	32 x 98 x 31	1	ZK175G	2CPX062761R9999
	20 x 1.5 - 4	6 x 25	32 x 115 x 31	1	ZK206G	2CPX062762R9999
	23 x 1.5 – 4	7 x 25	32 x 132 x 31	1	ZK237G	2CPX063165R9999
	26 x 1.5 – 4	8 x 25	32 x 149 x 31	1	ZK268G	2CPX063166R9999
ZK10P10	**Quick terminlas connection bridge** for Quick-terminals				ZK10P10	2CPX062763R9999
 ZK15	**Adapter for ZK50B/ZK51B** By snapping the N Quick-terminal ZK50B/ZK51B into the adapter ZK15				ZK15	2CPX064984R9999

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
N/PE quick terminals.

For mounting in ComfortLine compact CU

Article		Pieces	Type	Order code
ZK24	**Quick-carriers** Usable width for Quick plug-in terminals 214 mm, 13 units	1	ZK24	2CPX052696R9999
CZ14	Holder for Quick-carriers	1	CZ14	2CPX052695R9999
ZK224	**N/PE Quick-terminal set** Comprised of: Quick-carriers: ZK24, 13 units and Quick-terminals: ZK113B: N 3 x 25 + 11 x 4 mm² ZK82B: N 2 x 25 + 8 x 4 mm² ZK175G: PE 5 x 25 + 17 x 4 mm²	1	ZK224	2CPX052697R9999

For mounting in ComfortLine compact CA

Article		Pieces	Type	Order code
	Quick-carrier			
ZK19	Usable width for Quick-terminals 214 mm, 13 units	1	ZK19	2CPX052456R9999
ZK23	Usable width for Quick-terminals 214 mm, 13 units to increase space for wiring	1	ZK23	2CPX054423R9999
CZ13	**Holder for Quick-carrier**	1	CZ13	2CPX052554R9999
ZK19A	**Quick-carrier without holder** For expanding ZK19 or ZK221	1	ZK19A	2CPX052562R9999
ZK221	**N/PE Quick-terminal set** Comprised of: Quick-carriers: ZK19 and Quick-terminals: ZK113B: N 3 x 25 + 11 x 4 mm² ZK82B: N 2 x 25 + 8 x 4 mm² ZK175G: PE 5 x 25 + 17 x 4 mm²	1	ZK221	2CPX052457R9999
ZK222	**For distribution boards with 3 distribution rows** Comprised of: Quick-carriers: ZK23 and Quick-terminals: ZK113B: N 3 x 25 + 11 x 4 mm² ZK82B: N 2 x 25 + 8 x 4 mm² ZK175G: PE 5 x 25 + 17 x 4 mm²	1	ZK222	2CPX054422R9999

Subdistribution boards

ComfortLine Compact CA/CU distribution boards.
General accessories

Article		Pieces	Type	Order code
ZX371	**DIN rail for terminal blocks 35 x 7.5 mm** For mounting between the EDF mounting frame For lowered mounting in combination with ZK104P2 insulator			
	1 panel width	1	ZX371	2CPX068076R9999
	2 panel width	1	ZX389	2CPX068190R9999
ED51	**DIN rail for terminal blocks 35 x 15 mm*** For mounting between the EDF mounting frame For lowered mounting in combination with ZK104P2 insulator			
	1 panel width	1	ED51	2CPX039251R9999
	2 panel width	1	ED52	2CPX039252R9999
ZX21	**DIN rail 35 x 7.5 mm** for mounting on the EDF mounting frame			
	1 panel width	1	ZX21	2CPX039021R9999
	2 panel width	1	ZX22	2CPX039022R9999
ED1	**DIN rail 35 x 15 mm*** for mounting on the EDF mounting frame			
	1 panel width	1	ED1	2CPX039381R9999
	2 panel width	1	ED2	2CPX039382R9999
ZK90P2	**Insulator for DIN rails** for mounting between the EDF mounting frame 35 x 7.5 and 35 x 15 mm, incl. mounting material	2	ZK90P2	2CPX062426R9999
		100	ZK90P100	2CPX068613R9999
ZB32P20	**Fastening screws for DIN rails**			
	Slotted/hexalobular socket pan head thread rolling screw T25	20	ZB32P20	2CPX062651R9999
	Slotted/hexalobular socket pan head thread rolling screw T25	500	ZB32P500	2CPX062652R9999
ED137P4	**Cover holder 45 mm high** for mounting (inserting, turning) on EDF profile rails, as well as for latching a bulkhead on, with 35 x 7.5 mm top-hat rails, only this cover bracket must be use	4	ED137P4	2CPX062600R9999
		40	ED137P40	2CPX062601R9999
ED138P4	**Cover holder 52.5 mm high** for mounting (inserting, turning) on EDF and WR profile rails, as well as for latching a partition wall on, with 35 x 15 mm top-hat rails, only this cover bracket must be used	4	ED138P4	2CPX062630R9999
		40	ED138P40	2CPX062603R9999
ED138P4	**90° press-and-turn lock** for fastening steel sheet or aluminium plates on cover mounts	12	ED50P12	2CPX062337R9999
ZA1P5	**Slot cover** Color RAL 7035, 12 separation units for 12 space units each, breakable	5	ZA1P5	2CPX062384R9999
		50	ZA1P50	2CPX062378R9999

* When installing CombiLine modules and distribution panels with 15 mm DIN rails, restrictions on lock and key operations must be taken into account, see the specific page ahead

Subdistribution boards

ComfortLine Compact CA/CU distribution boards. General accessories

Article		Pieces	Type	Order code
CZB113	**Vertical partition** between distribution panels, not arc-proof			
	Height 3 rows	1	CZB113	2CPX052450R9999
	Height 4 rows	1	CZB114	2CPX052451R9999
	Height 5 rows	1	CZB115	2CPX052452R9999
	Height 6 rows	1	CZB116	2CPX052453R9999
	Height 7 rows	1	CZB117	2CPX052454R9999
	Height 8 rows	1	CZB118	2CPX052455R9999
ZK300	**N/PE-busbar system** Cu 12 x 5 mm, max. conncetion 95 mm²			
	1 field width	1	ZK300	2CPX038551R9999
	2 field width	1	ZK301	2CPX038552R9999
ZX518	**N/PE-busbar holder** for copper rails 12 x 5 mm, 20 x 5 mm, 30 x 5 mm	1	ZX518	2CPX067805R9999
		10	ZX518P10	2CPX062551R9999
ZA6 ZA61P10	**DIN A4 plastic plan pocket** Self-adhesive with transparent case and back support	1	ZA6	2CPX038227R9999
		10	ZA6P10	2CPX062380R9999
	DIN A4 plastic plan pocket Self-adhesive with transparent case	10	ZA61P10	2CPX062375R9999
ZA5	**DIN A4 plastic plan pocket** Self-adhesive	1	ZA13	2CPX038233R9999
		10	ZA13P10	2CPX062381R9999
	DIN A5 plastic plan pocket Self-adhesive	1	ZA5	2CPX038228R9999
		10	ZA5P10	2CPX062382R9999
ZBC1	**Labeling system** Self-adhesive for ComfortLine Compact CU			
	up to 144 Space units	1	ZBC1	2CPX052690R9999
	up to 288 Space units	1	ZBC2	2CPX052691R9999

Subdistribution boards

ComfortLine Compact CA/CU distribution boards. General accessories

For mounting in ComfortLine compact CU

Article		Pcs.	Type	Order code	Price
CZH4	**Hollow wall set for ComfortLine Compact CU** For retrofitting a ComfortLine CU flush mounted cabinet to a hollow wall cabinet Wall width min. 8 mm, max. 40 mm	1	CZH4	2CPX052692R9999	
CZL63	**Grounding kit for ComfortLine Compact CU** For upgrading to protection class 1	1	CZL63	2CPX052693R9999	
CZS10	**Cable entry slider** With pre-cut holes to break out the required cable entry holes	1	CZS10	2CPX052694R9999	
CZBH1	**Vertical partition** 1 field width, with 150 mm connection parts for potential-free connection of EDF profile rails when using media combi panels	1	CZBH1	2CPX052699R9999	
ZK104P2	**Insulator** for mounting between the EDF mounting frame 35 x 7.5 and 35 x 15 mm, incl. mounting material	2 100	ZK104P2 ZK104P100	2CPX054476R9999 2CPX054477R9999	

For mounting in ComfortLine compact CA

Article		Pcs.	Type	Order code	Price
CZL61	**Earthing set** For the conversion to protection class 1	1	CZL61	2CPX052449R9999	
CZF1	**Flange for cable entry** 2 x 25.5 mm, 2 x 47.5 mm, 1 x 62 mm	1	CZF1	2CPX052435R9999	
CZF2	**Membrane flange top** 34 x 12 mm, 9 x 15.5 mm, 6 x 19 mm, 2 x 40.5 mm, 2 x data line	1	CZF2	2CPX052436R9999	
CZF3	**Closing flange**	1	CZF3	2CPX052437R9999	
CZF4	**Flange for M screw fittings** 10 x M16, 3 x M16/M20, 1 x M16/M20/M25, 1 x M16/M25/M32/M40/M50	1	CZF4	2CPX052438R9999	

* Included in scope of delivery

Subdistribution boards

ComfortLine Compact CA/CU distribution boards. General accessories

For mounting in ComfortLine compact CA

Article		Pcs.	Type	Order code	Price
CZ9P16	**Wire holder** For the side wiring duct in wall-mounted cabinets CA	16	CZ9P16	2CPX052556R9999	
CZ12	**Depth Level Compensation*** For wall-mounted cabinets CA	2	CZ12	2CPX052553R9999	
CZ15	**Accessory kit ComfortLine Compact CA*** Consisting of: 2x Depth level compensation 4x Cover caps for cabinet mounting screws	1	CZ15	2CPX052563R9999	
ZK103P2	**Insulator**				
	for DIN rails between EDF and WR	2	ZK103P2	2CPX060644R9999	
	35 x 7.5 and 35 x 15 mm, incl. fastening material	100	ZK103P100	2CPX060645R9999	
KB19	**Cable entry covers** With end plates and fixing brackets made of plastic, colour RAL9016 matching the colour of the cabinets				
	1 panel wide, Height 300 mm	1	KB19	2CPX044049R9999	
	2 panel wide, Height 550 mm	1	KB29	2CPX044050R9999	
	3 panel wide, Height 800 mm	1	KB39	2CPX044051R9999	
	4 panel wide, Height 1050 mm	1	KB49	2CPX044052R9999	
	5 panel wide, Height 1300 mm	1	KB59	2CPX044053R9999	
KB219	**Profile** Plastic, colour RAL9016, width 2000 mm	1	KB219	2CPX044055R9999	
KBS9	**End plate left/right** Plastic, colour RAL9016 1 set, 2 pcs.	1	KBS9	2CPX044057R9999	
KBW1	**Mounting bracket** Made of plastic with holding magnet for mounting on the cabinet	1	KBW1	2CPX044058R9999	

* Included in scope of delivery



Cross section cable entry cover

Subdistribution boards

ComfortLine A wall-mounting cabinets IP44

For wall-mounting

A37

A57B

Technical specifications	
Standards/regulations	DIN EN 61439-1/-2/-3
Protection class	II, double insulated
Protection class	With door IP44
	Without door IP30[1]
Mechanical impact strength	IK07
Rated current	$I_{(nA)}$ up to 250 A

Product features	
Enclosures and doors	Made of sheet steel, colour white RAL 9016, powder-coated
	With depth level compensation
	One top mounted membrane flange per panel width
	Door opening angle 120°
	Double-wing doors on cabinets with three or more panel widths
	Doors with espagnolette closure
	Flange openings pre-embossed at the bottom and sides
	With cable strain relief
Internal configuration options	Prepared to be fitted with distribution and media panels[2]
	Prepared to be fitted with CombiLine-M modules on the EDF mounting frame[2]
Delivery forms	Empty cabinets with and without door
	Also delivered is a flange for cable entry CZF1 for the lower connection area
Accessories	Cable entry covers
	Closures
	Doors

> Distribution board panels/combination sets CombiLine, see main catalogue

[1] For an internal configuration as sub-distribution board with distribution panels or CombiLine modules

[2] Fastening elements CZ11 for fastening distribution panels and CombiLine modules on the front level have to be ordered separately

Subdistribution boards

ComfortLine A wall-mounting cabinets IP44

For wall-mounting

		Height			External dimensions	With door IP44			Without door IP30		
OH	Rows	(mm)	PW	Mod-ules	H x W x D mm	Type	Order code	Price	Type	Order code	Price
00	3	500	1	36	500 x 300 x 215	A13	2CPX052010R9999		-	-	
			2	72	500 x 550 x 215	A23	2CPX052011R9999		-	-	
			3	108	500 x 800 x 215	A33	2CPX052012R9999		-	-	
			4	144	500 x 1050 x 215	A43	2CPX052013R9999		-	-	
			5	180	500 x 1300 x 215	A53	2CPX052014R9999		-	-	
0	4	650	1	48	650 x 300 x 215	A14	2CPX052015R9999		-	-	
			2	96	650 x 550 x 215	A24	2CPX052016R9999		-	-	
			3	144	650 x 800 x 215	A34	2CPX052017R9999		-	-	
			4	192	650 x 1050 x 215	A44	2CPX052018R9999		-	-	
			5	240	650 x 1300 x 215	A54	2CPX052019R9999		-	-	
1	5	800	1	60	800 x 300 x 215	A15	2CPX052020R9999		-	-	
			2	120	800 x 550 x 215	A25	2CPX052021R9999		-	--	
			3	180	800 x 800 x 215	A35	2CPX052022R9999		-	-	
			4	240	800 x 1050 x 215	A45	2CPX052023R9999		-	-	
			5	300	800 x 1300 x 215	A55	2CPX052024R9999		-	-	
2	6	950	1	72	950 x 300 x 215	A16	2CPX052025R9999		-	-	
			2	144	950 x 550 x 215	A26	2CPX052026R9999		-	-	
			3	216	950 x 800 x 215	A36	2CPX052027R9999		-	-	
			4	288	950 x 1050 x 215	A46	2CPX052028R9999		-	-	
			5	360	950 x 1300 x 215	A56	2CPX052029R9999		-	-	
3	7	1100	1	84	1100 x 300 x 215	A17	2CPX052030R9999		A17B	2CPX052083R9999	
			2	168	1100 x 550 x 215	A27	2CPX052031R9999		A27B	2CPX052084R9999	
			3	252	1100 x 800 x 215	A37	2CPX052032R9999		A37B	2CPX052085R9999	
			4	336	1100 x 1050 x 215	A47	2CPX052033R9999		A47B	2CPX052086R9999	
			5	420	1100 x 1300 x 215	A57	2CPX052034R9999		A57B	2CPX052087R9999	
4	8	1250	1	96	1250 x 300 x 215	A18	2CPX052035R9999		-	-	
			2	192	1250 x 550 x 215	A28	2CPX052036R9999		-	-	
			3	288	1250 x 800 x 215	A38	2CPX052037R9999		-	-	
			4	384	1250 x 1050 x 215	A48	2CPX052038R9999		-	-	
			5	480	1250 x 1300 x 215	A58	2CPX052039R9999		-	-	
5	9	1400	1	108	1400 x 300 x 215	A19	2CPX052040R9999		A19B	2CPX052088R9999	
			2	216	1400 x 550 x 215	A29	2CPX052041R9999		A29B	2CPX052089R9999	
			3	324	1400 x 800 x 215	A39	2CPX052042R9999		A39B	2CPX052090R9999	
			4	432	1400 x 1050 x 215	A49	2CPX052043R9999		A49B	2CPX052091R9999	
			5	540	1400 x 1300 x 215	A59	2CPX052044R9999		A59B	2CPX052092R9999	

Subdistribution boards

ComfortLine A wall-mounting cabinets

Accessories

Article		Pcs.	Type	Order code	Price
CZ2	**Connection screws** For cabinet connections, 1 set	1	CZ2	CPX052460R9999	
CZ3	**Insulating frame for cabinet to cabinet connections** For the side flange cut-outs (to guarantee the double insulation for cabinet to cabinet connections) (with connection material)	1	CZ3	2CPX052461R9999	
	For the connection of cabinets up to May 2020 with cabinets of the ComfortLine series	1	CZ3A	2CPX052560R9999	
CZ4	**Insulating frame for cabinet to cabinet connections** For the upper/lower flange cut-outs (to guarantee the double insulation for cabinet to cabinet connections)	1	CZ4	2CPX052462R9999	
CZ6	**Mounting frame** For lateral flange mounting	1	CZ6	2CPX052464R9999	
CZ1P4	**External mounting brackets**	4	CZ1P4	2CPX052459R9999	
CZF1	**Flange for cable entry** 2 x 25.5 mm, 2 x 47.5 mm, 1 x 62 mm	1	CZF1	2CPX052435R9999	
CZF1D	**Theft protection** For CZF1	1	CZF1D	2CPX052555R9999	
CZF2	**Membrane flange*** 34 x 12 mm, 9 x 15.5 mm, 6 x 19 mm, 2 x 40.5 mm, 2 x data line	1	CZF2	2CPX052436R9999	
CZF3	**Closing flange**	1	CZF3	2CPX052437R9999	
CZF4	**Flange for M screw fittings** 10 x M16, 3 x M16/M20, 1 x M16/M20/M25, 1 x M16/M25/M32/M40/M50	1	CZF4	2CPX052438R9999	

* Included in delivery

Subdistribution boards

ComfortLine A wall-mounting cabinets

Accessories

Article		Pcs.	Type	Order code	Price
CZT1 **CZT2**	**Standard closure***	1	CZT1	2CPX052413R9999	
	Closure with lock With 2 keys	1	CZT2	2CPX052412R9999	
CZT23	**Espagnolette closure*** In connection with standard closure CZT1 or closure with lock CZT2				
	Overall height 3 GU	1	CZT23	2CPX052423R9999	
	Overall height 4 GU	1	CZT24	2CPX052424R9999	
	Overall height 5 GU	1	CZT25	2CPX052425R9999	
	Overall height 6 GU	1	CZT26	2CPX052426R9999	
	Overall height 7 GU	1	CZT27	2CPX052427R9999	
	Overall height 8 GU	1	CZT28	2CPX052428R9999	
	Overall height 9 GU	1	CZT29	2CPX052429R9999	
CZT60	**Installation set**[*1] Of operating options in connection with TZ503, TZ504, TZ505, TZ506, TZ507 and TZ508	1	CZT60	2CPX052414R9999	
TZ507	**Latch plate**[*1]				
	Double bit operating pin, 3 mm standard and 5 mm (CZT60 to be ordered separately)	1	TZ507	2CPX010491R9999	
	For triangular and square operating pin and for Daimler-Benz insert (CZT60 to be ordered separately)	1	TZ508	2CPX010492R9999	
ZH130 **ZH132** **ZH134** **ZH137**	**Operating Pin**				
	Double bit 3 mm	1	ZH130	2CPX060490R9999	
	Double bit 5 mm	1	ZH131	2CPX060491R9999	
	Triangular 7 mm	1	ZH132	2CPX060492R9999	
	Triangular 8 mm	1	ZH133	2CPX060493R9999	
	Square 6 mm	1	ZH134	2CPX060494R9999	
	Square 7 mm	1	ZH135	2CPX060495R9999	
	Square 8 mm	1	ZH136	2CPX060496R9999	
	Daimler-Benz insert	1	ZH137	2CPX060497R9999	
CZF1B	**Accessory set ComfortLine A*** Consisting of: 1x Flange for cable entry 2x Depth Level Compensation 4x Cover caps for cabinet mounting screws	1	CZF1B	2CPX052447R9999	
CZ11	**Fastening parts for CombiLine**				
	4 pieces	4	CZ11	2CPX052552R9999	
	20 × 4 pieces	80	CZ11P20	2CPX052559R9999	
	4 pieces assembled in cabinet, only in combination with assembled CombiLine modules	4	CZ11M	2CPX052558R9999	
CZ12	**Depth Level Compensation** For wall-mounted cabinets	2	CZ12	2CPX052553R9999	

* Included in scope of delivery

*[1] Espagnolette closure CZT...H to be ordered separetely

Subdistribution boards

ComfortLine A wall-mounting cabinets

Accessories

Article		Pcs.	Type	Order code	Price
TZ503 TZ504	**L-handle**[*1] [*2]				
	With latch plate, without lock (EK333)	1	TZ503	2CPX010487R9999	
	With latch plate, with lock	1	TZ504	2CPX010488R9999	
TZ505 TZ506	**T-handle**[*1] [*2]				
	With latch plate, without lock (EK333)	1	TZ505	2CPX010489R9999	
	With latch plate, with lock	1	TZ506	2CPX010490R9999	
CZT7	**Swivel handle with lead sealable cap**[*2] For semi-cylinder, 40 mm (30/10)	1	CZT5	2CPX052488R9999	
	Swivel handle with lead sealable cap[*2] With closure EO 12	1	CZT6	2CPX052430R9999	
	Swivel handle with lead sealable cap[*2] With cabinet handle Berlin, simultaneous locking	1	CZT7	2CPX052431R9999	
ZH142	**Dummy insert** Instead of a semi-cylinder	1	ZH142	2CPX060502R9999	
CZT23H	**Espagnolette closure** In connection with swivel handle CZT5, CZT6, CZT7 and TZ503, TZ504, TZ505, TZ506, TZ507 and TZ508				
	Overall height 3 GU	1	CZT23H	2CPX052416R9999	
	Overall height 4 GU	1	CZT24H	2CPX052417R9999	
	Overall height 5 GU	1	CZT25H	2CPX052418R9999	
	Overall height 6 GU	1	CZT26H	2CPX052419R9999	
	Overall height 7 GU	1	CZT27H	2CPX052420R9999	
	Overall height 8 GU	1	CZT28H	2CPX052421R9999	
	Overall height 9 GU	1	CZT29H	2CPX052422R9999	
CZT10	**Door hinge*** 1 set comprised of 1x hinge top-left/top-right/ bottom-left/bottom-right	1	CZT10	2CPX052415R9999	

*Included in scope of delivery

*[1] Order installation set CZT60 separetely

*[2] Order espagnolette closure CZT...H separetely

Subdistribution boards

ComfortLine A wall-mounting cabinets

Accessories

Article		Pcs.	Type	Order code	Price
CZB213	**Vertical partitions** Made of plastic, not arc-resistant				
	3 GU	1	CZB213	2CPX052498R9999	
	4 GU	1	CZB214	2CPX052499R9999	
	5 GU	1	CZB215	2CPX052500R9999	
	6 GU	1	CZB216	2CPX052501R9999	
	7 GU	1	CZB217	2CPX052502R9999	
	8 GU	1	CZB218	2CPX052503R9999	
	9 GU	1	CZB219	2CPX052504R9999	
KB19	**Cable entry covers** With end plates and fixing brackets made of plastic, colour RAL9016 matching the colour of the cabinets				
	1 panel wide, Height 300 mm	1	KB19	2CPX044049R9999	
	2 panel wide, Height 550 mm	1	KB29	2CPX044050R9999	
	3 panel wide, Height 800 mm	1	KB39	2CPX044051R9999	
	4 panel wide, Height 1050 mm	1	KB49	2CPX044052R9999	
	5 panel wide, Height 1300 mm	1	KB59	2CPX044053R9999	
KB219	**Profile** Plastic, colour RAL9016, width 2000 mm	1	KB219	2CPX044055R9999	
KBS9	**End plate left/right** Plastic, colour RAL9016 1 set, 2 pcs.	1	KBS9	2CPX044057R9999	
KBW1	**Mounting bracket** Made of plastic with holding magnet for mounting on the cabinet	1	KBW1	2CPX044058R9999	
ZA6	**Document holder DIN A4** Self-adhesive, with transparent sleeve	1	ZA6	2CPX038227R9999	
		10	ZA6P10	2CPX062380R9999	
	Self-adhesive, with transparent sleeve and reinforced back	10	ZA61P10	2CPX062375R9999	
ZA5	**Document holder DIN A5** Self-adhesive	1	ZA5	2CPX038228R9999	
		10	ZA5P10	2CPX062382R9999	

Subdistribution boards

ComfortLine A wall-mounting cabinets

Accessories sheet steel doors

CTB27S

Article	GU	PW	OH	To be used with cabinet	Door without closure			Door with closure		
					Type	Order code	Price	Type	Order code	Price
	3	1	00	A13	-	-		CTB13S	2CPX052318R9999	
		2	00	A23	-	-		CTB23S	2CPX052319R9999	
		3*	00	A33	CTB13	2CPX052304R9999		CTB23S	2CPX052319R9999	
		4*	00	A43	CTB23	2CPX052305R9999		CTB23S	2CPX052319R9999	
		5*	00	A53	CTB23	2CPX052305R9999		CTB33S	2CPX052320R9999	
	4	1	0	A14	-	-		CTB14S	2CPX052321R9999	
		2	0	A24	-	-		CTB24S	2CPX052322R9999	
		3*	0	A34	CTB14	2CPX052306R9999		CTB24S	2CPX052322R9999	
		4*	0	A44	CTB24	2CPX052307R9999		CTB24S	2CPX052322R9999	
		5*	0	A54	CTB24	2CPX052307R9999		CTB34S	2CPX052323R9999	
	5	1	1	A15	-	-		CTB15S	2CPX052324R9999	
		2	1	A25	-	-		CTB25S	2CPX052325R9999	
		3*	1	A35	CTB15	2CPX052308R9999		CTB25S	2CPX052325R9999	
		4*	1	A45	CTB25	2CPX052309R9999		CTB25S	2CPX052325R9999	
		5*	1	A55	CTB25	2CPX052309R9999		CTB35S	2CPX052326R9999	
	6	1	2	A16	-	-		CTB16S	2CPX052327R9999	
		2	2	A26	-	-		CTB26S	2CPX052328R9999	
		3*	2	A36	CTB16	2CPX052310R9999		CTB26S	2CPX052328R9999	
		4*	2	A46	CTB26	2CPX052311R9999		CTB26S	2CPX052328R9999	
		5*	2	A56	CTB26	2CPX052311R9999		CTB36S	2CPX052329R9999	
	7	1	3	A17	-	-		CTB17S	2CPX052330R9999	
		2	3	A27	-	-		CTB27S	2CPX052331R9999	
		3*	3	A37	CTB17	2CPX052312R9999		CTB27S	2CPX052331R9999	
		4*	3	A47	CTB27	2CPX052313R9999		CTB27S	2CPX052331R9999	
		5*	3	A57	CTB27	2CPX052313R9999		CTB37S	2CPX052332R9999	
	8	1	4	A18	-	-		CTB18S	2CPX052333R9999	
		2	4	A28	-	-		CTB28S	2CPX052334R9999	
		3*	4	A38	CTB18	2CPX052314R9999		CTB28S	2CPX052334R9999	
		4*	4	A48	CTB28	2CPX052315R9999		CTB28S	2CPX052334R9999	
		5*	4	A58	CTB28	2CPX052315R9999		CTB38S	2CPX052335R9999	
	9	1	5	A19	-	-		CTB19S	2CPX052336R9999	
		2	5	A29	-	-		CTB29S	2CPX052337R9999	
		3*	5	A39	CTB19	2CPX052316R9999		CTB29S	2CPX052337R9999	
		4*	5	A49	CTB29	2CPX052317R9999		CTB29S	2CPX052337R9999	
		5*	5	A59	CTB29	2CPX052317R9999		CTB39S	2CPX052338R9999	

> Double-wing doors on cabinets with three or more panel widths

Subdistribution boards

ComfortLine A wall-mounting cabinets

Accessories transparent doors

CTT27S

Article	GU	PW	OH	To be used with Abinet	Door without closure			Door with closure		
					Type	Order code	Price	Type	Order code	Price
	3	1	00	A13	-	-		CTT13S	2CPX052353R9999	
		2	00	A23	-	-		CTT23S	2CPX052354R9999	
		3*	00	A33	CTT13	2CPX052339R9999		CTT23S	2CPX052354R9999	
		4*	00	A43	CTT23	2CPX052340R9999		CTT23S	2CPX052354R9999	
		5*	00	A53	CTT23	2CPX052340R9999		CTT33S	2CPX052355R9999	
	4	1	0	A14	-	-		CTT14S	2CPX052356R9999	
		2	0	A24	-	-		CTT24S	2CPX052357R9999	
		3*	0	A34	CTT14	2CPX052341R9999		CTT24S	2CPX052357R9999	
		4*	0	A44	CTT24	2CPX052342R9999		CTT24S	2CPX052357R9999	
		5*	0	A54	CTT24	2CPX052342R9999		CTT34S	2CPX052358R9999	
	5	1	1	A15	-	-		CTT15S	2CPX052359R9999	
		2	1	A25	-	-		CTT25S	2CPX052360R9999	
		3*	1	A35	CTT15	2CPX052343R9999		CTT25S	2CPX052360R9999	
		4*	1	A45	CTT25	2CPX052344R9999		CTT25S	2CPX052360R9999	
		5*	1	A55	CTT25	2CPX052344R9999		CTT35S	2CPX052361R9999	
	6	1	2	A16	-	-		CTT16S	2CPX052362R9999	
		2	2	A26	-	-		CTT26S	2CPX052363R9999	
		3*	2	A36	CTT16	2CPX052345R9999		CTT26S	2CPX052363R9999	
		4*	2	A46	CTT26	2CPX052346R9999		CTT26S	2CPX052363R9999	
		5*	2	A56	CTT26	2CPX052346R9999		CTT36S	2CPX052364R9999	
	7	1	3	A17	-	-		CTT17S	2CPX052365R9999	
		2	3	A27	-	-		CTT27S	2CPX052366R9999	
		3*	3	A37	CTT17	2CPX052347R9999		CTT27S	2CPX052366R9999	
		4*	3	A47	CTT27	2CPX052348R9999		CTT27S	2CPX052366R9999	
		5*	3	A57	CTT27	2CPX052348R9999		CTT37S	2CPX052367R9999	
	8	1	4	A18	-	-		CTT18S	2CPX052368R9999	
		2	4	A28	-	-		CTT28S	2CPX052369R9999	
		3*	4	A38	CTT18	2CPX052349R9999		CTT28S	2CPX052369R9999	
		4*	4	A48	CTT28	2CPX052350R9999		CTT28S	2CPX052369R9999	
		5*	4	A58	CTT28	2CPX052350R9999		CTT38S	2CPX052370R9999	
	9	1	5	A19	-	-		CTT19S	2CPX052371R9999	
		2	5	A29	-	-		CTT29S	2CPX052372R9999	
		3*	5	A39	CTT19	2CPX052351R9999		CTT29S	2CPX052372R9999	
		4*	5	A49	CTT29	2CPX052352R9999		CTT29S	2CPX052372R9999	
		5*	5	A59	CTT29	2CPX052352R9999		CTT39S	2CPX052373R9999	

> Double-wing doors on cabinets with three or more panel widths

Subdistribution boards

ComfortLine A wall-mounting cabinets

Accessories sheet steel doors with ventilation holes

CTL27S

Article	GU	PW	OH	To be used with cabinet	Door without closure			Door with closure		
					Type	Order code	Price	Type	Order code	Price
	3	1	00	A13	-	-		CTL13S	2CPX052374R9999	
		2	00	A23	-	-		CTL23S	2CPX052375R9999	
		3*	00	A33	-	-		CTL23S	2CPX052375R9999	
		4*	00	A43	-	-		CTL23S	2CPX052375R9999	
		5*	00	A53	-	-		-	-	
	4	1	0	A14	-	-		CTL14S	2CPX052376R9999	
		2	0	A24	-	-		CTL24S	2CPX052377R9999	
		3*	0	A34	-	-		CTL24S	2CPX052377R9999	
		4*	0	A44	-	-		CTL24S	2CPX052377R9999	
		5*	0	A54	-	-		-	-	
	5	1	1	A15	-	-		CTL15S	2CPX052378R9999	
		2	1	A25	-	-		CTL25S	2CPX052379R9999	
		3*	1	A35	-	-		CTL25S	2CPX052379R9999	
		4*	1	A45	-	-		CTL25S	2CPX052379R9999	
		5*	1	A55	-	-		-	-	
	6	1	2	A16	-	-		CTL16S	2CPX052380R9999	
		2	2	A26	-	-		CTL26S	2CPX052381R9999	
		3*	2	A36	-	-		CTL26S	2CPX052381R9999	
		4*	2	A46	-	-		CTL26S	2CPX052381R9999	
		5*	2	A56	-	-		-	-	
	7	1	3	A17	-	-		CTL17S	2CPX052382R9999	
		2	3	A27	-	-		CTL27S	2CPX052383R9999	
		3*	3	A37	-	-		CTL27S	2CPX052383R9999	
		4*	3	A47	-	-		CTL27S	2CPX052383R9999	
		5*	3	A57	-	-		CTL37S	2CPX052384R9999	
	8	1	4	A18	-	-		CTL18S	2CPX052484R9999	
		2	4	A28	-	-		CTL28S	2CPX052485R9999	
		3*	4	A38	-	-		CTL28S	2CPX052485R9999	
		4*	4	A48	-	-		CTL28S	2CPX052485R9999	
		5*	4	A58	-	-		-	-	
	9	1	5	A19	-	-		CTL19S	2CPX052385R9999	
		2	5	A29	-	-		CTL29S	2CPX052386R9999	
		3*	5	A39	-	-		CTL29S	2CPX052386R9999	
		4*	5	A49	-	-		CTL29S	2CPX052386R9999	
		5*	5	A59	-	-		CTL39S	2CPX052387R9999	

> Double-wing doors on cabinets with three or more panel widths

Subdistribution boards

ComfortLine A wall-mounting cabinets

Accessories sheet steel doors with plastic insert and ventilation holes (WiFi-door)

CTW27S

Article	GU	PW	OH	To be used with cabinet	Door without closure			Door with closure		
					Type	Order code	Price	Type	Order code	Price
	3	1	00	A13	-	-		CTW13S	2CPX052388R9999	
		2	00	A23	-	-		CTW23S	2CPX052389R9999	
		3*	00	A33	-	-		CTW23S	2CPX052389R9999	
		4*	00	A43	-	-		CTW23S	2CPX052389R9999	
		5*	00	A53	-	-		-	-	
	4	1	0	A14	-	-		CTW14S	2CPX052390R9999	
		2	0	A24	-	-		CTW24S	2CPX052391R9999	
		3*	0	A34	-	-		CTW24S	2CPX052391R9999	
		4*	0	A44	-	-		CTW24S	2CPX052391R9999	
		5*	0	A54	-	-		-	-	
	5	1	1	A15	-	-		CTW15S	2CPX052392R9999	
		2	1	A25	-	-		CTW25S	2CPX052393R9999	
		3*	1	A35	-	-		CTW25S	2CPX052393R9999	
		4*	1	A45	-	-		CTW25S	2CPX052393R9999	
		5*	1	A55	-	-		-	-	
	6	1	2	A16	-	-		CTW16S	2CPX052394R9999	
		2	2	A26	-	-		CTW26S	2CPX052395R9999	
		3*	2	A36	-	-		CTW26S	2CPX052395R9999	
		4*	2	A46	-	-		CTW26S	2CPX052395R9999	
		5*	2	A56	-	-		-	-	
	7	1	3	A17	-	-		CTW17S	2CPX052396R9999	
		2	3	A27	-	-		CTW27S	2CPX052397R9999	
		3*	3	A37	-	-		CTW27S	2CPX052397R9999	
		4*	3	A47	-	-		CTW27S	2CPX052397R9999	
		5*	3	A57	-	-		CTW37S	2CPX052398R9999	
	8	1	4	A18	-	-		CTW18S	2CPX052486R9999	
		2	4	A28	-	-		CTW28S	2CPX052487R9999	
		3*	4	A38	-	-		CTW28S	2CPX052487R9999	
		4*	4	A48	-	-		CTW28S	2CPX052487R9999	
		5*	4	A58	-	-		-	-	
	9	1	5	A19	-	-		CTW19S	2CPX052399R9999	
		2	5	A29	-	-		CTW29S	2CPX052400R9999	
		3*	5	A39	-	-		CTW29S	2CPX052400R9999	
		4*	5	A49	-	-		CTW29S	2CPX052400R9999	
		5*	5	A59	-	-		CTW39S	2CPX052401R9999	

> Double-wing doors on cabinets with three or more panel widths

Subdistribution boards

ComfortLine B wall-mounting cabinets IP44

For wall-mounting ⏚

B-wall-mounting cabinets
IP44 ⏚, cabinet depth 215 mm

For an internal configuration with distribution panels/combination sets CombiLine N modules to EDF mounting frame, see main catalogue Internal Configuration Systems

Technical specifications	
Standards/regulations	DIN EN 61439-1/-2/-3
Protection class	I, earthed
Protection class	IP44
Mechanical impact strength	IK07
Rated current	$I_{(nA)}$ up to 250 A
Product features	
Enclosures and doors	Made of sheet steel, colour white RAL 9016, powder-coated
	With depth level compensation
	One top mounted membrane flange per panel width
	Door opening angle 120°
	Double-wing doors on cabinets with three or more panel widths
	Doors with espagnolette closure
	Flange openings pre-embossed at the bottom and sides
	Fastening elements CZ11 for the front fastening level are assembled
Internal configuration options	Prepared to be fitted with distribution panels/combination sets
	Prepared to be fitted with CombiLine-M modules on the EDF mounting frame
Delivery forms	Empty cabinets with door
	Also delivered is a flange for cable entry CZF1 for the lower connection area
Accessories	Cable entry covers
	Closures
	Transparent doors

> Distribution panels/combination sets CombiLine, see main catalogue

Subdistribution boards

ComfortLine B wall-mounting cabinets IP44

For wall-mounting ⏚

GU	OH	Height in mm	PW	SU	External dimensions H x B x T mm	Type	Order code	Price
3	00	500	1	36	500 x 300 x 215	B13	2CPX052050R9999	
			2	72	500 x 550 x 215	B23	2CPX052051R9999	
			3	108	500 x 800 x 215	B33	2CPX052052R9999	
4	0	650	1	48	650 x 300 x 215	B14	2CPX052053R9999	
			2	96	650 x 550 x 215	B24	2CPX052054R9999	
			3	144	650 x 800 x 215	B34	2CPX052055R9999	
			4	192	650 x 1050 x 215	B44	2CPX052056R9999	
			5	240	650 x 1300 x 215	B54	2CPX052057R9999	
5	1	800	1	60	800 x 300 x 215	B15	2CPX052058R9999	
			2	120	800 x 550 x 215	B25	2CPX052059R9999	
			3	180	800 x 800 x 215	B35	2CPX052060R9999	
			4	240	800 x 1050 x 215	B45	2CPX052061R9999	
			5	300	800 x 1300 x 215	B55	2CPX052062R9999	
6	2	950	1	72	950 x 300 x 215	B16	2CPX052063R9999	
			2	144	950 x 550 x 215	B26	2CPX052064R9999	
			3	216	950 x 800 x 215	B36	2CPX052065R9999	
			4	288	950 x 1050 x 215	B46	2CPX052066R9999	
			5	360	950 x 1300 x 215	B56	2CPX052067R9999	
7	3	1100	1	84	1100 x 300 x 215	B17	2CPX052068R9999	
			2	168	1100 x 550 x 215	B27	2CPX052069R9999	
			3	252	1100 x 800 x 215	B37	2CPX052070R9999	
			4	336	1100 x 1050 x 215	B47	2CPX052071R9999	
			5	420	1100 x 1300 x 215	B57	2CPX052072R9999	
8	4	1250	1	96	1250 x 300 x 215	B18	2CPX052073R9999	
			2	192	1250 x 550 x 215	B28	2CPX052074R9999	
			3	288	1250 x 800 x 215	B38	2CPX052075R9999	
			4	384	1250 x 1050 x 215	B48	2CPX052076R9999	
			5	480	1250 x 1300 x 215	B58	2CPX052077R9999	
9	5	1400	1	108	1400 x 300 x 215	B19	2CPX052078R9999	
			2	216	1400 x 550 x 215	B29	2CPX052079R9999	
			3	324	1400 x 800 x 215	B39	2CPX052080R9999	
			4	432	1400 x 1050 x 215	B49	2CPX052081R9999	
			5	540	1400 x 1300 x 215	B59	2CPX052082R9999	

Subdistribution boards

ComfortLine B wall-mounting cabinets

Accessories

Article		Pcs.	Type	Order code	Price
CZ1P4	**External mounting brackets**	4	CZ1P4	2CPX052459R9999	
CZ2	**Cabinet connection** For cabinet to cabinet connections, 1 set	1	CZ2	2CPX052460R9999	
CZ3	**Insulating frame for cabinet to cabinet connections** For the side flange cut-outs	1	CZ3	2CPX052461R9999	
CZ6	**Mounting frame** For lateral flange mounting	1	CZ6	2CPX052464R9999	
CZ4	**Insulating frame for cabinet to cabinet connections** For the upper/lower flange cut-outs	1	CZ4	2CPX052462R9999	
CZF1	**Flange for cable entry** 2 x 25.5 mm, 2 x 47.5 mm, 1 x 62 mm	1	CZF1	2CPX052435R9999	
CZF2	**Membrane flange*** 34 x 12 mm, 9 x 15.5 mm, 6 x 19 mm, 2 x 40.5 mm, 2 x data line	1	CZF2	2CPX052436R9999	
CZF3	**Closing flange**	1	CZF3	2CPX052437R9999	
CZF4	**Flange for M screw fittings** 10 x M16, 3 x M16/M20, 1 x M16/M20/M25, 1 x M16/M25/M32/M40/M50	1	CZF4	2CPX052438R9999	
CZF10	**Metal flange** closed	1	CZF10	2CPX052440R9999	
CZF11	**Metal flanges for M screw fittings** 4 × M16, 4 × M20, 3 × M32, 1 × M40	1	CZF11	2CPX052441R9999	
	21 × M20		CZF12	2CPX052442R9999	
	16 × M16, 12 × M20		CZF13	2CPX052443R9999	
	24 × M16		CZF14	2CPX052444R9999	

*Included in scope of delivery

Subdistribution boards

ComfortLine B wall-mounting cabinets

Accessories

Article		Pcs.	Type	Order code	Price
CZL60	**Earthing set***	1	CZL60	2CPX052448R9999	
 CZT1 CZT2	**Standard closure***	1	CZT1	2CPX052413R9999	
	Closure with lock With 2 keys	1	CZT2	2CPX052412R9999	
CZT23	**Espagnolette closure*** In connection with standard closure CZT1 or closure with lock CZT2				
	Overall height 3 GU	1	CZT23	2CPX052423R9999	
	Overall height 4 GU	1	CZT24	2CPX052424R9999	
	Overall height 5 GU	1	CZT25	2CPX052425R9999	
	Overall height 6 GU	1	CZT26	2CPX052426R9999	
	Overall height 7 GU	1	CZT27	2CPX052427R9999	
	Overall height 8 GU	1	CZT28	2CPX052428R9999	
	Overall height 9 GU	1	CZT29	2CPX052429R9999	
CZT60	**Installation set** *2 Of operating options in connection with TZ503, TZ504, TZ505, TZ506, TZ507 and TZ508	1	CZT60	2CPX052414R9999	
TZ507	**Latch plate***1 *2				
	Double bit operating pin, 3 mm standard and 5 mm	1	TZ507	2CPX010491R9999	
	For triangular and square operating pin and for Daimler-Benz insert	1	TZ508	2CPX010492R9999	
ZH130 ZH132 ZH134 ZH137	**Operating Pin**				
	Double bit 3 mm	1	ZH130	2CPX060490R9999	
	Double bit 5 mm	1	ZH131	2CPX060491R9999	
	Triangular 7 mm	1	ZH132	2CPX060492R9999	
	Triangular 8 mm	1	ZH133	2CPX060493R9999	
	Square 6 mm	1	ZH134	2CPX060494R9999	
	Square 7 mm	1	ZH135	2CPX060495R9999	
	Square 8 mm	1	ZH136	2CPX060496R9999	
	Daimler-Benz insert	1	ZH137	2CPX060497R9999	
CZ12	**Depth Level Compensation**	2	CZ12	2CPX052553R9999	

*Included in scope of delivery
*1 Order installation set CZT60 separetely
*2 Order espagnolette closure CZT...H separetely

Subdistribution boards

ComfortLine B wall-mounting cabinets

Accessories

Article		Pcs.	Type	Order code	Price
TZ505 TZ506	**T-handle**[*1] [*2]				
	With latch plate, without lock	1	TZ506	2CPX010490R9999	
	With latch plate, with lock	1	TZ505	2CPX010489R9999	
 TZ503 TZ504	**Latch handle**[*1] [*2]				
	With latch plate, without lock	1	TZ504	2CPX010488R9999	
	With latch plate, with lock	1	TZ503	2CPX010487R9999	
CZT7	**Swivel handle with lead sealable cap**[*2] For semi-cylinder, 40 mm (30/10)	1	CZT5	2CPX052488R9999	
	Swivel handle with lead sealable cap[*2] With closure EO 12	1	CZT6	2CPX052430R9999	
	Swivel handle with lead sealable cap[*2] With cabinet handle Berlin, simultaneous locking	1	CZT7	2CPX052431R9999	
ZH142	**Dummy insert** Instead of a semi-cylinder	1	ZH142	2CPX060502R9999	
CZT23H	**Espagnolette closure** In connection with swivel handle CZT5, CZT6, CZT7 and TZ503, TZ504, TZ505, TZ506, TZ507 and TZ508				
	Overall height 3 GU	1	CZT23H	2CPX052416R9999	
	Overall height 4 GU	1	CZT24H	2CPX052417R9999	
	Overall height 5 GU	1	CZT25H	2CPX052418R9999	
	Overall height 6 GU	1	CZT26H	2CPX052419R9999	
	Overall height 7 GU	1	CZT27H	2CPX052420R9999	
	Overall height 8 GU	1	CZT28H	2CPX052421R9999	
	Overall height 9 GU	1	CZT29H	2CPX052422R9999	
CZT10	**Door hinge*** 1 set comprised of 1x hinge top-left/top-right/ bottom-left/bottom-right	1	CZT10	2CPX052415R9999	

*Included in scope of delivery

*[1] Order installation set CZT60 separetely

*[2] Order espagnolette closure CZT...H separetely

Subdistribution boards

ComfortLine B wall-mounting cabinets

Accessories

Article		Pcs.	Type	Order code	Price
CZB213	**Vertical partitions** Made of plastic, not arc-resistant				
	3 GU	1	CZB213	2CPX052498R9999	
	4 GU	1	CZB214	2CPX052499R9999	
	5 GU	1	CZB215	2CPX052500R9999	
	6 GU	1	CZB216	2CPX052501R9999	
	7 GU	1	CZB217	2CPX052502R9999	
	8 GU	1	CZB218	2CPX052503R9999	
	9 GU	1	CZB219	2CPX052504R9999	
KB19	**Cable entry covers** With end plates and fixing brackets made of plastic, colour RAL9016 matching the colour of the cabinets				
	1 panel wide, Height 300 mm	1	KB19	2CPX044049R9999	
	2 panel wide, Height 550 mm	1	KB29	2CPX044050R9999	
	3 panel wide, Height 800 mm	1	KB39	2CPX044051R9999	
	4 panel wide, Height 1050 mm	1	KB49	2CPX044052R9999	
	5 panel wide, Height 1300 mm	1	KB59	2CPX044053R9999	
KB219	**Profile** Plastic, colour RAL9016, width 2000 mm	1	KB219	2CPX044055R9999	
KBS9	**End plate left/right** Plastic, colour RAL9016 1 set, 2 pcs.	1	KBS9	2CPX044057R9999	
KBW1	**Mounting bracket** Made of plastic with holding magnet for mounting on the cabinet	1	KBW1	2CPX044058R9999	
ZA6	**Document holder DIN A4** Self-adhesive, with transparent sleeve	1	ZA6	2CPX038227R9999	
		10	ZA6P10	2CPX062380R9999	
	Self-adhesive, with transparent sleeve and reinforced back	10	ZA61P10	2CPX062375R9999	
ZA5	**Document holder DIN A5** Self-adhesive	1	ZA5	2CPX038228R9999	
		10	ZA5P10	2CPX062382R9999	

Subdistribution boards

ComfortLine B wall-mounting cabinets

Accessories sheet steel doors

CTB27S

Article	GU	PW	OH	To be used with cabinet	Door without closure			Door with closure		
					Type	Order code	Price	Type	Order code	Price
	3	1	00	B13	-	-		CTB13S	2CPX052318R9999	
		2	00	B23	-	-		CTB23S	2CPX052319R9999	
		3	00	B33	CTB13	2CPX052304R9999		CTB23S	2CPX052319R9999	
	4	1	0	B14	-	-		CTB14S	2CPX052321R9999	
		2	0	B24	-	-		CTB24S	2CPX052322R9999	
		3	0	B34	CTB14	2CPX052306R9999		CTB24S	2CPX052322R9999	
		4	0	B44	CTB24	2CPX052307R9999		CTB24S	2CPX052322R9999	
		5	0	B54	CTB24	2CPX052307R9999		CTB34S	2CPX052323R9999	
	5	1	1	B15	-	-		CTB15S	2CPX052324R9999	
		2	1	B25	-	-		CTB25S	2CPX052325R9999	
		3	1	B35	CTB15	2CPX052308R9999		CTB25S	2CPX052325R9999	
		4	1	B45	CTB25	2CPX052309R9999		CTB25S	2CPX052325R9999	
		5	1	B55	CTB25	2CPX052309R9999		CTB35S	2CPX052326R9999	
	6	1	2	B16	-	-		CTB16S	2CPX052327R9999	
		2	2	B26	-	-		CTB26S	2CPX052328R9999	
		3	2	B36	CTB16	2CPX052310R9999		CTB26S	2CPX052328R9999	
		4	2	B46	CTB26	2CPX052311R9999		CTB26S	2CPX052328R9999	
		5	2	B56	CTB26	2CPX052311R9999		CTB36S	2CPX052329R9999	
	7	1	3	B17	-	-		CTB17S	2CPX052330R9999	
		2	3	B27	-	-		CTB27S	2CPX052331R9999	
		3	3	B37	CTB17	2CPX052312R9999		CTB27S	2CPX052331R9999	
		4	3	B47	CTB27	2CPX052313R9999		CTB27S	2CPX052331R9999	
		5	3	B57	CTB27	2CPX052313R9999		CTB37S	2CPX052332R9999	
	8	1	4	B18	-	-		CTB18S	2CPX052333R9999	
		2	4	B28	-	-		CTB28S	2CPX052334R9999	
		3	4	B38	CTB18	2CPX052314R9999		CTB28S	2CPX052334R9999	
		4	4	B48	CTB28	2CPX052315R9999		CTB28S	2CPX052334R9999	
		5	4	B58	CTB28	2CPX052315R9999		CTB38S	2CPX052335R9999	
	9	1	5	B19	-	-		CTB19S	2CPX052336R9999	
		2	5	B29	-	-		CTB29S	2CPX052337R9999	
		3	5	B39	CTB19	2CPX052316R9999		CTB29S	2CPX052337R9999	
		4	5	B49	CTB29	2CPX052317R9999		CTB29S	2CPX052337R9999	
		5	5	B59	CTB29	2CPX052317R9999		CTB39S	2CPX052338R9999	

> Double-wing doors on cabinets with three or more panel widths

Subdistribution boards

ComfortLine B wall-mounting cabinets

Accessories transparent doors

CTT27S

Article	GU	PW	OH	To be used with cabinet	Door without closure*			Door with closure*		
					Type	Order code	Price	Type	Order code	Price
	3	1	00	B13	-	-		CTT13S	2CPX052353R9999	
		2	00	B23	-	-		CTT23S	2CPX052354R9999	
		3	00	B33	CTT13	2CPX052339R9999		CTT23S	2CPX052354R9999	
	4	1	0	B14	-	-		CTT14S	2CPX052356R9999	
		2	0	B24	-	-		CTT24S	2CPX052357R9999	
		3	0	B34	CTT14	2CPX052341R9999		CTT24S	2CPX052357R9999	
		4	0	B44	CTT24	2CPX052342R9999		CTT24S	2CPX052357R9999	
		5	0	B54	CTT24	2CPX052342R9999		CTT34S	2CPX052358R9999	
	5	1	1	B15	-	-		CTT15S	2CPX052359R9999	
		2	1	B25	-	-		CTT25S	2CPX052360R9999	
		3	1	B35	CTT15	2CPX052343R9999		CTT25S	2CPX052360R9999	
		4	1	B45	CTT25	2CPX052344R9999		CTT25S	2CPX052360R9999	
		5	1	B55	CTT25	2CPX052344R9999		CTT35S	2CPX052361R9999	
	6	1	2	B16	-	-		CTT16S	2CPX052362R9999	
		2	2	B26	-	-		CTT26S	2CPX052363R9999	
		3	2	B36	CTT16	2CPX052345R9999		CTT26S	2CPX052363R9999	
		4	2	B46	CTT26	2CPX052346R9999		CTT26S	2CPX052363R9999	
		5	2	B56	CTT26	2CPX052346R9999		CTT36S	2CPX052364R9999	
	7	1	3	B17	-	-		CTT17S	2CPX052365R9999	
		2	3	B27	-	-		CTT27S	2CPX052366R9999	
		3	3	B37	CTT17	2CPX052347R9999		CTT27S	2CPX052366R9999	
		4	3	B47	CTT27	2CPX052348R9999		CTT27S	2CPX052366R9999	
		5	3	B57	CTT27	2CPX052348R9999		CTT37S	2CPX052367R9999	
	8	1	4	B18	-	-		CTT18S	2CPX052368R9999	
		2	4	B28	-	-		CTT28S	2CPX052369R9999	
		3	4	B38	CTT18	2CPX052349R9999		CTT28S	2CPX052369R9999	
		4	4	B48	CTT28	2CPX052350R9999		CTT28S	2CPX052369R9999	
		5	4	B58	CTT28	2CPX052350R9999		CTT38S	2CPX052370R9999	
	9	1	5	B19	-	-		CTT19S	2CPX052371R9999	
		2	5	B29	-	-		CTT29S	2CPX052372R9999	
		3	5	B39	CTT19	2CPX052351R9999		CTT29S	2CPX052372R9999	
		4	5	B49	CTT29	2CPX052352R9999		CTT29S	2CPX052372R9999	
		5	5	B59	CTT29	2CPX052352R9999		CTT39S	2CPX052373R9999	

> Double-wing doors on cabinets with three or more panel widths

Subdistribution boards

ComfortLine B wall-mounting cabinets

Accessories sheet steel doors with ventilation holes

CTL27S

Article	GU	PW	OH	To be used with cabinet*	Door without closure			Door with closure		
					Type	Order code	Price	Type	Order code	Price
	3	1	00	B13	-	-	-	CTL13S	2CPX052374R9999	
		2	00	B23	-	-	-	CTL23S	2CPX052375R9999	
		3	00	B33	-	-	-	CTL23S	2CPX052375R9999	
	4	1	0	B14	-	-	-	CTL14S	2CPX052376R9999	
		2	0	B24	-	-	-	CTL24S	2CPX052377R9999	
		3	0	B34	-	-	-	CTL24S	2CPX052377R9999	
		4	0	B44	-	-	-	CTL24S	2CPX052377R9999	
		5	0	B54	-	-	-	-	-	
	5	1	1	B15	-	-	-	CTL15S	2CPX052378R9999	
		2	1	B25	-	-	-	CTL25S	2CPX052379R9999	
		3	1	B35	-	-	-	CTL25S	2CPX052379R9999	
		4	1	B45	-	-	-	CTL25S	2CPX052379R9999	
		5	1	B55	-	-	-	-	-	
	6	1	2	B16	-	-	-	CTL16S	2CPX052380R9999	
		2	2	B26	-	-	-	CTL26S	2CPX052381R9999	
		3	2	B36	-	-	-	CTL26S	2CPX052381R9999	
		4	2	B46	-	-	-	CTL26S	2CPX052381R9999	
		5	2	B56	-	-	-	-	-	
	7	1	3	B17	-	-	-	CTL17S	2CPX052382R9999	
		2	3	B27	-	-	-	CTL27S	2CPX052383R9999	
		3	3	B37	-	-	-	CTL27S	2CPX052383R9999	
		4	3	B47	-	-	-	CTL27S	2CPX052383R9999	
		5	3	B57	-	-	-	CTL37S	2CPX052384R9999	
	8	1	4	B18	-	-	-	CTL18S	2CPX052484R9999	
		2	4	B28	-	-	-	CTL28S	2CPX052485R9999	
		3	4	B38	-	-	-	CTL28S	2CPX052485R9999	
		4	4	B48	-	-	-	CTL28S	2CPX052485R9999	
		5	4	B58	-	-	-	-	-	
	9	1	5	B19	-	-	-	CTL19S	2CPX052385R9999	
		2	5	B29	-	-	-	CTL29S	2CPX052386R9999	
		3	5	B39	-	-	-	CTL29S	2CPX052386R9999	
		4	5	B49	-	-	-	CTL29S	2CPX052386R9999	
		5	5	B59	-	-	-	CTL39S	2CPX052387R9999	

> Double-wing doors on cabinets with three or more panel widths

* In conjunction with ComfortLine B Protection class IP30

Subdistribution boards

ComfortLine B wall-mounting cabinets

Accessories sheet steel doors with plastic insert and ventilation holes (WiFi-door)

CTW27S

Article	GU	PW	OH	To be used with cabinet*	Door without closure			Door with closure		
					Type	Order code	Price	Type	Order code	Price
	3	1	00	B13	-	-		CTW13S	2CPX052388R9999	
		2	00	B23	-	-		CTW23S	2CPX052389R9999	
		3	00	B33	-	-		CTW23S	2CPX052389R9999	
	4	1	0	B14	-	-		CTW14S	2CPX052390R9999	
		2	0	B24	-	-		CTW24S	2CPX052391R9999	
		3	0	B34	-	-		CTW24S	2CPX052391R9999	
		4	0	B44	-	-		CTW24S	2CPX052391R9999	
		5	0	B54	-	-		-	-	
	5	1	1	B15	-	-		CTW15S	2CPX052392R9999	
		2	1	B25	-	-		CTW25S	2CPX052393R9999	
		3	1	B35	-	-		CTW25S	2CPX052393R9999	
		4	1	B45	-	-		CTW25S	2CPX052393R9999	
		5	1	B55	-	-		-	-	
	6	1	2	B16	-	-		CTW16S	2CPX052394R9999	
		2	2	B26	-	-		CTW26S	2CPX052395R9999	
		3	2	B36	-	-		CTW26S	2CPX052395R9999	
		4	2	B46	-	-		CTW26S	2CPX052395R9999	
		5	2	B56	-	-		-	-	
	7	1	3	B17	-	-		CTW17S	2CPX052396R9999	
		2	3	B27	-	-		CTW27S	2CPX052397R9999	
		3	3	B37	-	-		CTW27S	2CPX052397R9999	
		4	3	B47	-	-		CTW27S	2CPX052397R9999	
		5	3	B57	-	-		CTW37S	2CPX052398R9999	
	8	1	4	B18	-	-		CTW18S	2CPX052486R9999	
		2	4	B28	-	-		CTW28S	2CPX052487R9999	
		3	4	B38	-	-		CTW28S	2CPX052487R9999	
		4	4	B48	-	-		CTW28S	2CPX052487R9999	
		5	4	B58	-	-		-	-	
	9	1	5	B19	-	-		CTW19S	2CPX052399R9999	
		2	5	B29	-	-		CTW29S	2CPX052400R9999	
		3	5	B39	-	-		CTW29S	2CPX052400R9999	
		4	5	B49	-	-		CTW29S	2CPX052400R9999	
		5	5	B59	-	-		CTW39S	2CPX052401R9999	

> Double-wing doors on cabinets with three or more panel widths

* In conjunction with ComfortLine B Protection class IP30

TwinLine N wall mounting and floor standing cabinets:

The complete cabinet system in all sizes

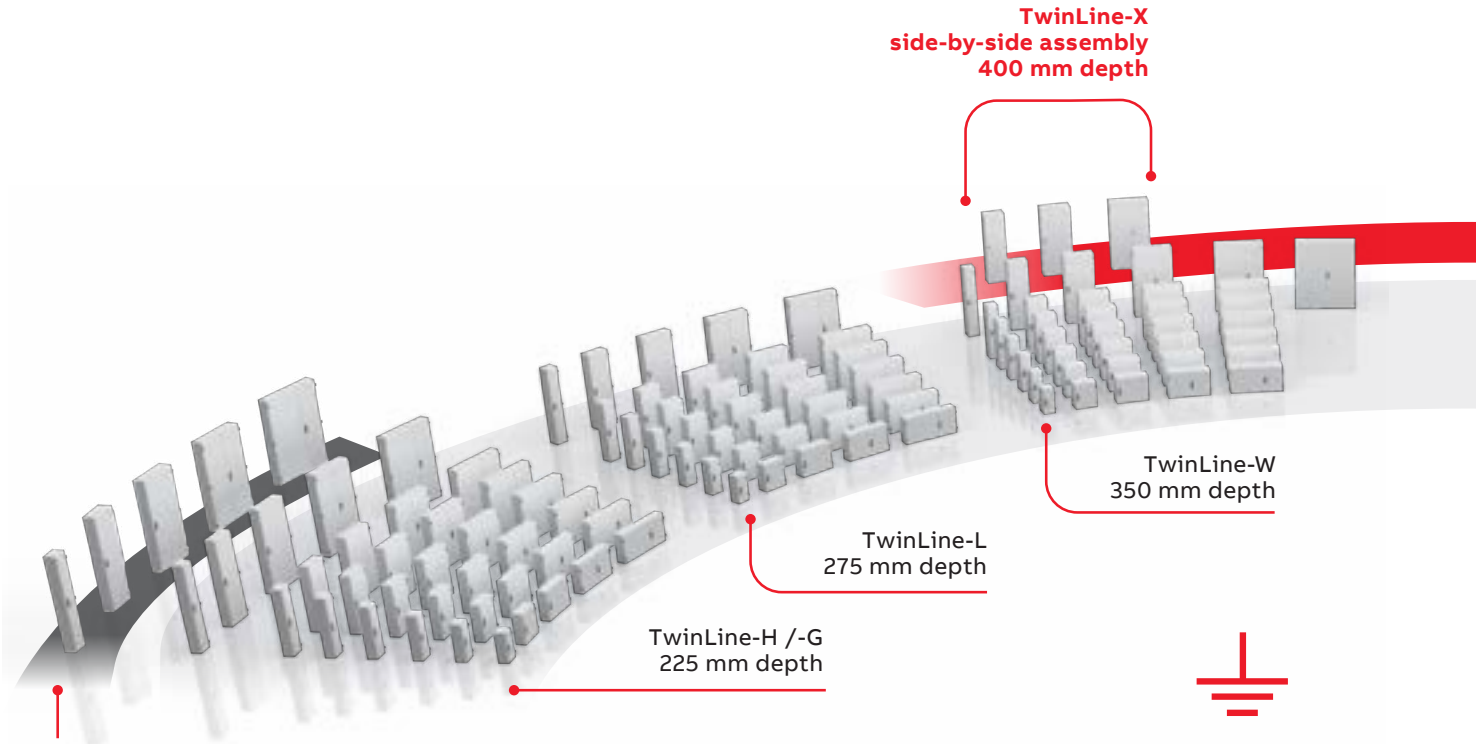

			TwinLine N 44					TwinLine N 55																		
Cabinet series			TwinLine-H					TwinLine-G					TwinLine-L					TwinLine-W						TwinLine-X				
Protection class			up to IP44					up to IP55					up to IP55					up to IP55						up to IP55				
Depth			**225**					**225**					**275**					**350**						**400**				
Width			300	550	800	1050	1300	300	550	800	1050	1300	300	550	800	1050	1300	300	550	800	1050	1300	1550	300	550	800	1050	1300
Height	GU 4	650	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 5	800	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 6	950	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 7	1100	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 8	1250	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 9	1400	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 12	1850	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	●	●	●	-

> Dimension in mm

- One system
- Two protection classes
- Four cabinet depths
- Unlimited possibilities

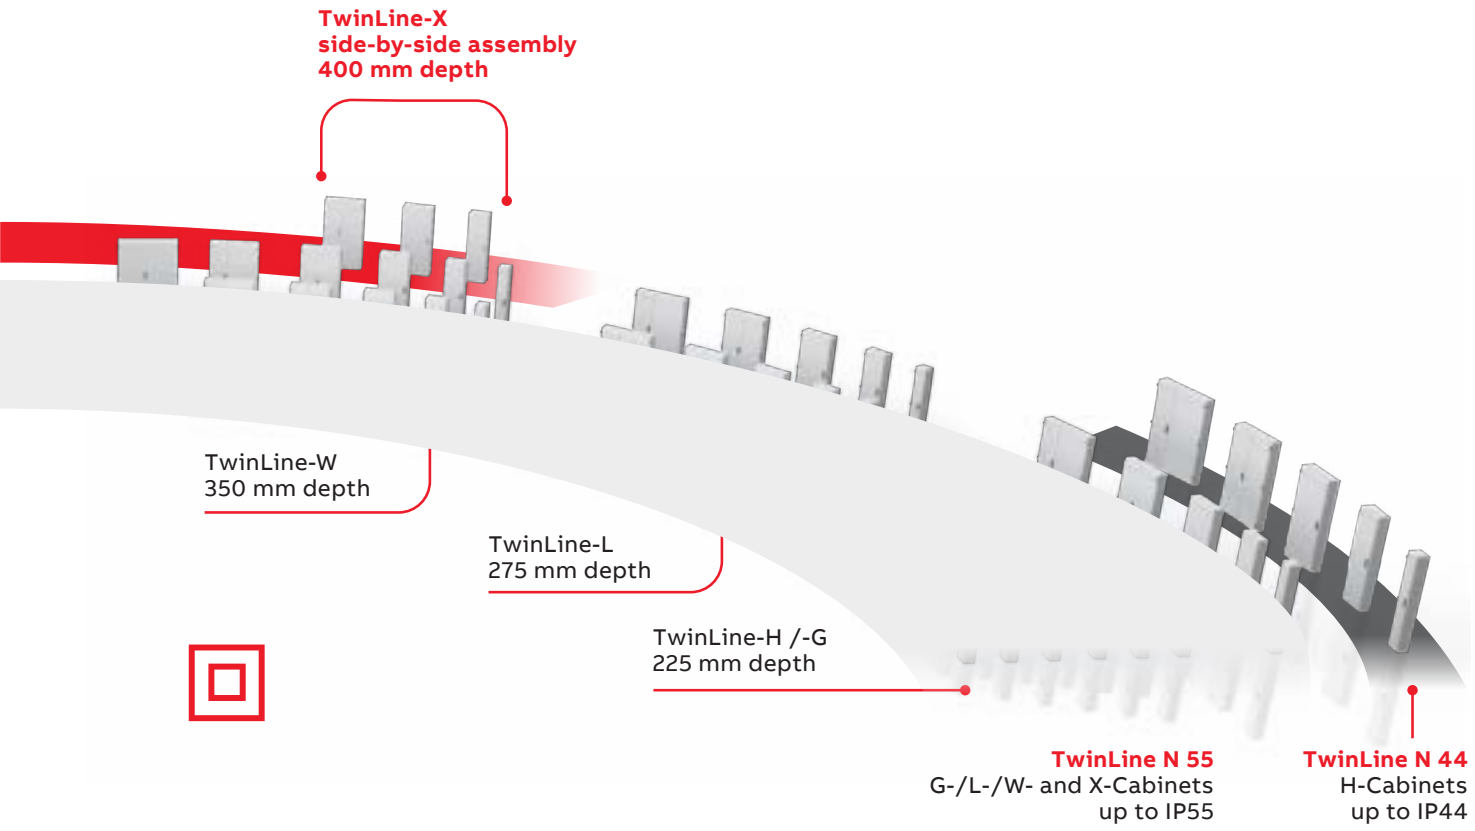

			TwinLine N 44					TwinLine N 55																	
Cabinet series			TwinLine-H					**TwinLine-G**					**TwinLine-L**					**TwinLine-W**						**TwinLine-X**				
Protection class			up to IP44					up to IP55					up to IP55					up to IP55						up to IP55				
Depth			**225**					**225**					**275**					**350**						**400**				
Width			300	550	800	1050	1300	300	550	800	1050	1300	300	550	800	1050	1300	300	550	800	1050	1300	1550	300	550	800	1050	1300
Height	GU 4	650	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 5	800	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 6	950	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 7	1100	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 8	1250	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 9	1400	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	-	-	-	-	-
	GU 12	1850	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	-	●	●	●	-

> Dimension in mm

TwinLine N 44 floor-standing cabinets

TwinLine N 44 floor-standing cabinets

Specifications and product features

Specifications for TwinLine H	
Standards/regulations	DIN EN 61439-1/-2/-3, DIN VDE 0660-600-1/-2/-3*
Protection class	I, earthed
	II, insulated
Degree of protection	IP44 with door
	IP30 without door, when expanded as an installation distributor with meter and distributor fields, combination sets or CombiLine modules
Mechanical impact strength	IK08 for the cabinet housing with steel-sheet door
	IK07 in the area of flange knock-outs
Ambient conditions	Indoor installation
	Ambient temperature max. + 40 °C
	Ambient temperature min. - 5 °C
	Operating temperature max. + 55 °C
	Storage temperature max. + 55 °C
	Storage temperature min. - 5 °C

Product features for TwinLine H	
Housing and doors	Made of sheet steel, color RAL 7035, powder-coated
	A flange opening is cut out for each field width, knock-outs are on the bottom
	Door opening angle 180 degrees
	Double door cabinets with field width 4 and over
	Doors with rod lock
	Standard closure, double-bit 3 mm
Assembly options*	Prepared for expansion with meter and distributor fields, combination sets or CombiLine modules on EDF mounting frame
Forms of delivery	Enclosure with door
	External mounting lugs are included in the scope of delivery
	Support elements for each field width are included in the scope of delivery
	Touch protection included in the scope of delivery
	Middle support rail included in the scope of delivery
Accessories	Flanges must be ordered separately
	Base must be ordered separately

*The permissible heating for switchgear combinations (SK) up to 630 A rated current can be verified using the procedure according to 10.10.4.2; The required values of the power dissipation capacity for TwinLine N 44 standing cabinets refer to the tables on page ; above 630 A rated current, the procedure in accordance with 10.10.4.3 (DIN EN 61439-1 supplementary sheet 2, DIN VDE 0660-600-1 supplementary sheet 2) must be applied

TwinLine N 44 floor-standing cabinets

Delivery condition and expansion variants

TH312G

- Support components for each field width are pre-assembled
- Middle support rail and touch protection are included in the scope of delivery

EDFmounting frame installation
Expansion to an installation distributor with meter and distributor fields, combination sets or CombiLine modules on EDF mounting frame possible

TwinLine N 44 floor-standing cabinets

TwinLine-H, cabinet depth 225 mm, ⏚ ⧈

TH312G

Included in the scope of delivery
- External mounting brackets
- Supports for expansion with EDF mounting frame
- Middle support rail
- Touch protection

Order accessories separately
- Flanges
- Base

Height		Width		External dimensions	Floor-standing cabinets with door IP44	
GU	OH	PW	PLE	H x W in mm	Type	Order code
TwinLine-H, cabinet depth 225 mm ⏚						
12	8	1	144	1850 x 300	TH112G	2CPX010948R9999
		2	288	1850 x 550	TH212G	2CPX010950R9999
		3	432	1850 x 800	TH312G	2CPX010952R9999
		4	576	1850 x 1050	TH412G	2CPX010954R9999
		5	720	1850 x 1300	TH512G	2CPX010957R9999
TwinLine-H, cabinet depth 225 mm ⧈						
12	8	1	144	1850 x 300	TH112S	2CPX010949R9999
		2	288	1850 x 550	TH212S	2CPX010951R9999
		3	432	1850 x 800	TH312S	2CPX010953R9999
		4	576	1850 x 1050	TH412S	2CPX010955R9999
		5	720	1850 x 1300	TH512S	2CPX010958R9999

Cabinet accessories from page 22/104

TwinLine N 55 wall cabinets and floor-standing cabinets

Wall cabinets

TwinLine N 55 wall cabinets and floor-standing cabinets

Wall cabinets/specifications and product features

Specifications for TwinLine-G, -L and -W	
Standards/regulations	DIN EN 61439-1/-2/-3, DIN VDE 0660-600-1/-2/-3*[1]
Protection class	I, earthed
	II, insulated
Degree of protection	IP55 with door
	IP30 without door, when expanded as an installation distributor with meter and distributor fields, combination sets or CombiLine modules
Mechanical impact strength	IK08 for the cabinet housing with steel-sheet door
	IK07 in the area of flange knock-outs and for transparent doors
Ambient conditions	Indoor installation
	Ambient temperature max. + 40 °C
	Ambient temperature min. - 5 °C
	Operating temperature max. + 55 °C
	Storage temperature max. + 55 °C
	Storage temperature min. - 5 °C

Product features for TwinLine-G, -L and -W	
Housing and doors	Made of sheet steel, color RAL 7035, powder-coated
	A flange opening is cut out for each field width, knock-outs are on the side and bottom
	Door opening angle 180 degrees
	Double door cabinets with field width 4 and over
	Doors with rod lock
	Standard closure, double-bit 3 mm
Assembly options*	Prepared for expansion with meter and distributor fields, combination sets or CombiLine modules on EDF mounting frame
	Prepared for expansion with CombiLine modules on the WRmounting frame and mounting plates, by removing the EDF adapter
Forms of delivery	Enclosure with door
	Enclosure without door
	External mounting lugs are included in the scope of delivery
	Mounting strips with left and right mounting frame brackets, as well as an additional mounting strip for field width 4 and above cabinets, are included in the scope of delivery
	Touch protection for the insulated cabinet is included in the scope of delivery
	Touch protection for the earthed cabinet must be ordered separately as an accessory
Accessories	For housings without doors, the door can be ordered separately , as needed
	Flanges must be ordered separately
	Touch protection for the earthed cabinet must be ordered separately

*[1] The permissible heating for switchgear combinations (SK) up to 630 A rated current can be verified using the procedure according to 10.10.4.2; for the required values of the power dissipation capacity, please refer to the tables on page above 630 A rated current, the procedure according to 10.10.4.3 (DIN EN 61439-1 supplementary sheet 2, DIN VDE 0660-600-1 supplementary sheet 2) must be applied

* For detailed description of the assembly options of floor-standing cabinets se next pages in this chapter

TwinLine N 55 wall cabinets and floor-standing cabinets

Wall cabinets/assembly options ⏚

TG306G

Additionally order touch protection

Additionally order touch protection

Mounting plate installation
Expansion for the control technology with mounting plate, by removing the EDF adapter

EDFmounting frame installation
Expansion as an installation distributor with meter and distributor fields, combination sets or CombiLine modules on EDFmounting frame

Installation of WRmounting frame
Expansion as an installation distributor with CombiLine modules on WR mounting frame, by removing the EDF Adapter

A combination of the individual expansion variants next to each other is possible.

TwinLine N 55 wall cabinets and floor-standing cabinets

Wall cabinets/assembly options

TG306S

Touch protection included in the scope of delivery

Touch protection included in the scope of delivery

EDFmounting frame installation
Expansion as an installation distributor with meter and distributor fields, combination sets or CombiLine modules on EDFmounting frame

Installation of WRmounting frame
Expansion as an installation distributor with CombiLine modules on WR mounting frame, by removing the EDF Adapter

A combination of the individual expansion variants next to each other is possible.

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine-G wall cabinet, cabinet depth 225 mm ⏚

TG306G

Included in the scope of delivery

- External mounting brackets
- Mounting rails with left and right mounting frame brackets, as well as an additional mounting rail for cabinets with field width 4 and above
- Supports for expansion with meter and distributor fields, combination sets or CombiLine modules on EDF mounting frame
- Support for expansion with CombiLine modules on WRmounting frame and mounting plates, by removing the EDF Adapter

Order accessories separately

- Flanges
- Touch protection for expansion with meter and distributor fields, combination sets or CombiLine modules

Height		Width		External dimensions*2	Wall cabinets with door IP55		Wall cabinets without door IP30	
GU	OH	PW	PLE	H x W in mm	Type	Order code	Type	Order code
4	0	1	48	650 x 300	TG104G	2CPX010000R9999	TG104GB	2CPX010221R9999
		2	96	650 x 550	TG204G	2CPX010001R9999	TG204GB	2CPX010222R9999
		3	144	650 x 800	TG304G	2CPX010002R9999	TG304GB	2CPX010223R9999
		4	192	650 x 1050	TG404G	2CPX010003R9999	TG404GB	2CPX010224R9999
		5	240	650 x 1300	TG504G	2CPX010004R9999	TG504GB	2CPX010225R9999
5	1	1	60	800 x 300	TG105G	2CPX010005R9999	TG105GB	2CPX010226R9999
		2	120	800 x 550	TG205G	2CPX010006R9999	TG205GB	2CPX010227R9999
		3	180	800 x 800	TG305G	2CPX010007R9999	TG305GB	2CPX010228R9999
		4	240	800 x 1050	TG405G	2CPX010008R9999	TG405GB	2CPX010229R9999
		5	300	800 x 1300	TG505G	2CPX010009R9999	TG505GB	2CPX010230R9999
6	2	1	72	950 x 300	TG106G	2CPX010010R9999	TG106GB	2CPX010231R9999
		2	144	950 x 550	TG206G	2CPX010011R9999	TG206GB	2CPX010232R9999
		3	216	950 x 800	TG306G	2CPX010012R9999	TG306GB	2CPX010233R9999
		4	288	950 x 1050	TG406G	2CPX010013R9999	TG406GB	2CPX010234R9999
		5	360	950 x 1300	TG506G	2CPX010014R9999	TG506GB	2CPX010235R9999
7	3	1	84	1100 x 300	TG107G	2CPX010015R9999	TG107GB	2CPX010236R9999
		2	168	1100 x 550	TG207G	2CPX010016R9999	TG207GB	2CPX010237R9999
		3	252	1100 x 800	TG307G	2CPX010017R9999	TG307GB	2CPX010238R9999
		4	336	1100 x 1050	TG407G	2CPX010018R9999	TG407GB	2CPX010239R9999
		5	420	1100 x 1300	TG507G	2CPX010019R9999	TG507GB	2CPX010240R9999
8	4	1	96	1250 x 300	TG108G	2CPX010020R9999	TG108GB	2CPX010241R9999
		2	192	1250 x 550	TG208G	2CPX010021R9999	TG208GB	2CPX010242R9999
		3	288	1250 x 800	TG308G	2CPX010022R9999	TG308GB	2CPX010243R9999
		4	384	1250 x 1050	TG408G	2CPX010023R9999	TG408GB	2CPX010244R9999
		5	480	1250 x 1300	TG508G	2CPX010024R9999	TG508GB	2CPX010245R9999
9	5	1	108	1400 x 300	TG109G	2CPX010025R9999	TG109GB	2CPX010246R9999
		2	216	1400 x 550	TG209G	2CPX010026R9999	TG209GB	2CPX010247R9999
		3	324	1400 x 800	TG309G	2CPX010027R9999	TG309GB	2CPX010248R9999
		4	432	1400 x 1050	TG409G	2CPX010028R9999	TG409GB	2CPX010249R9999
		5	540	1400 x 1300	TG509G	2CPX010029R9999	TG509GB	2CPX010250R9999

*1 When expanding as an installation distributor with meter and distributor fields, combination sets or CombiLine modules

*2 External dimensions are without flange embossing.

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine-G wall cabinet, cabinet depth 225 mm

TG306S

Included in the scope of delivery

- External mounting brackets
- Touch protection
- Mounting rails with left and right mounting frame brackets, as well as an additional mounting rail for cabinets with field width 4 and above
- Supports for expansion with meter and distributor fields, combination sets or CombiLine modules on EDFmounting frame
- Support for expansion with CombiLine modules on WR mounting frame, by removing the EDF Adapter

Order accessories separately

- Flanges

Height		Width		External dimensions*2	Wall cabinets with door IP55		Wall cabinets without door IP30*1	
GU	OH	PW	PLE	H x W in mm	Type	Order code	Type	Order code
4	0	1	48	650 x 300	TG104S	2CPX010035R9999	TG104SB	2CPX010256R9999
		2	96	650 x 550	TG204S	2CPX010036R9999	TG204SB	2CPX010257R9999
		3	144	650 x 800	TG304S	2CPX010037R9999	TG304SB	2CPX010258R9999
		4	192	650 x 1050	TG404S	2CPX010038R9999	TG404SB	2CPX010259R9999
		5	240	650 x 1300	TG504S	2CPX010039R9999	TG504SB	2CPX010260R9999
5	1	1	60	800 x 300	TG105S	2CPX010040R9999	TG105SB	2CPX010261R9999
		2	120	800 x 550	TG205S	2CPX010041R9999	TG205SB	2CPX010262R9999
		3	180	800 x 800	TG305S	2CPX010042R9999	TG305SB	2CPX010263R9999
		4	240	800 x 1050	TG405S	2CPX010043R9999	TG405SB	2CPX010264R9999
		5	300	800 x 1300	TG505S	2CPX010044R9999	TG505SB	2CPX010265R9999
6	2	1	72	950 x 300	TG106S	2CPX010045R9999	TG106SB	2CPX010266R9999
		2	144	950 x 550	TG206S	2CPX010046R9999	TG206SB	2CPX010267R9999
		3	216	950 x 800	TG306S	2CPX010047R9999	TG306SB	2CPX010268R9999
		4	288	950 x 1050	TG406S	2CPX010048R9999	TG406SB	2CPX010269R9999
		5	360	950 x 1300	TG506S	2CPX010049R9999	TG506SB	2CPX010270R9999
7	3	1	84	1100 x 300	TG107S	2CPX010050R9999	TG107SB	2CPX010271R9999
		2	168	1100 x 550	TG207S	2CPX010051R9999	TG207SB	2CPX010272R9999
		3	252	1100 x 800	TG307S	2CPX010052R9999	TG307SB	2CPX010273R9999
		4	336	1100 x 1050	TG407S	2CPX010053R9999	TG407SB	2CPX010274R9999
		5	420	1100 x 1300	TG507S	2CPX010054R9999	TG507SB	2CPX010275R9999
8	4	1	96	1250 x 300	TG108S	2CPX010055R9999	TG108SB	2CPX010276R9999
		2	192	1250 x 550	TG208S	2CPX010056R9999	TG208SB	2CPX010277R9999
		3	288	1250 x 800	TG308S	2CPX010057R9999	TG308SB	2CPX010278R9999
		4	384	1250 x 1050	TG408S	2CPX010058R9999	TG408SB	2CPX010279R9999
		5	480	1250 x 1300	TG508S	2CPX010059R9999	TG508SB	2CPX010280R9999
9	5	1	108	1400 x 300	TG109S	2CPX010060R9999	TG109SB	2CPX010281R9999
		2	216	1400 x 550	TG209S	2CPX010061R9999	TG209SB	2CPX010282R9999
		3	324	1400 x 800	TG309S	2CPX010062R9999	TG309SB	2CPX010283R9999
		4	432	1400 x 1050	TG409S	2CPX010063R9999	TG409SB	2CPX010284R9999
		5	540	1400 x 1300	TG509S	2CPX010064R9999	TG509SB	2CPX010285R9999

*1 When expanding as an installation distributor with meter and distributor fields, combination sets or CombiLine modules

*2 External dimensions are without flange embossing.

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine-L wall cabinets, cabinet depth 275 mm ⏚

TL306G

Included in the scope of delivery

- External mounting brackets
- Mounting rails with left and right mounting frame brackets, as well as an additional mounting rail for cabinets with field width 4 and above
- Supports for expansion with meter and distributor fields, combination sets or CombiLine modules on EDF mounting frame
- Support for expansion with CombiLine modules on WR mounting frame and mounting plates, by removing the EDF Adapter

Order accessories separately

- Flanges
- Touch protection for expansion with meter and distributor fields, combination sets or CombiLine modules

Height		Width		External dimensions*2	Wall cabinets with door IP55		Wall cabinets without door IP30*1	
GU	OH	PW	PLE	H x W in mm	Type	Order code	Type	Order code
4	0	1	48	650 x 300	TL104G	2CPX010070R9999	TL104GB	2CPX010291R9999
		2	96	650 x 550	TL204G	2CPX010071R9999	TL204GB	2CPX010292R9999
		3	144	650 x 800	TL304G	2CPX010072R9999	TL304GB	2CPX010293R9999
		4	192	650 x 1050	TL404G	2CPX010073R9999	TL404GB	2CPX010294R9999
		5	240	650 x 1300	TL504G	2CPX010074R9999	TL504GB	2CPX010295R9999
5	1	1	60	800 x 300	TL105G	2CPX010075R9999	TL105GB	2CPX010296R9999
		2	120	800 x 550	TL205G	2CPX010076R9999	TL205GB	2CPX010297R9999
		3	180	800 x 800	TL305G	2CPX010077R9999	TL305GB	2CPX010298R9999
		4	240	800 x 1050	TL405G	2CPX010078R9999	TL405GB	2CPX010299R9999
		5	300	800 x 1300	TL505G	2CPX010079R9999	TL505GB	2CPX010300R9999
6	2	1	72	950 x 300	TL106G	2CPX010080R9999	TL106GB	2CPX010301R9999
		2	144	950 x 550	TL206G	2CPX010081R9999	TL206GB	2CPX010302R9999
		3	216	950 x 800	TL306G	2CPX010082R9999	TL306GB	2CPX010303R9999
		4	288	950 x 1050	TL406G	2CPX010083R9999	TL406GB	2CPX010304R9999
		5	360	950 x 1300	TL506G	2CPX010084R9999	TL506GB	2CPX010305R9999
7	3	1	84	1100 x 300	TL107G	2CPX010085R9999	TL107GB	2CPX010306R9999
		2	168	1100 x 550	TL207G	2CPX010086R9999	TL207GB	2CPX010307R9999
		3	252	1100 x 800	TL307G	2CPX010087R9999	TL307GB	2CPX010308R9999
		4	336	1100 x 1050	TL407G	2CPX010088R9999	TL407GB	2CPX010309R9999
		5	420	1100 x 1300	TL507G	2CPX010089R9999	TL507GB	2CPX010310R9999
8	4	1	96	1250 x 300	TL108G	2CPX010090R9999	TL108GB	2CPX010311R9999
		2	192	1250 x 550	TL208G	2CPX010091R9999	TL208GB	2CPX010312R9999
		3	288	1250 x 800	TL308G	2CPX010092R9999	TL308GB	2CPX010313R9999
		4	384	1250 x 1050	TL408G	2CPX010093R9999	TL408GB	2CPX010314R9999
		5	480	1250 x 1300	TL508G	2CPX010094R9999	TL508GB	2CPX010315R9999
9	5	1	108	1400 x 300	TL109G	2CPX010095R9999	TL109GB	2CPX010316R9999
		2	216	1400 x 550	TL209G	2CPX010096R9999	TL209GB	2CPX010317R9999
		3	324	1400 x 800	TL309G	2CPX010097R9999	TL309GB	2CPX010318R9999
		4	432	1400 x 1050	TL409G	2CPX010098R9999	TL409GB	2CPX010319R9999
		5	540	1400 x 1300	TL509G	2CPX010099R9999	TL509GB	2CPX010320R9999

*1 When expanding as an installation distributor with meter and distributor fields, combination sets or CombiLine modules

*2 External dimensions are without flange embossing.

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine-L wall cabinets, cabinet depth 275 mm

TL306S

Included in the scope of delivery

- External mounting brackets
- Touch protection
- Mounting rails with left and right mounting frame brackets, as well as an additional mounting rail for cabinets with field width 4 and above
- Supports for expansion with meter and distributor fields, combination sets or CombiLine modules on EDFmounting frame
- Support for expansion with CombiLine modules on WRmounting frame, by removing the EDF Adapter

Order accessories separately

- Flanges

Height		Width		External dimensions*2	Wall cabinets with door IP55		Wall cabinets without door IP30*1	
GU	OH	PW	PLE	H x W in mm	Type	Order code	Type	Order code
4	0	1	48	650 x 300	TL104S	2CPX010105R9999	TL104SB	2CPX010326R9999
		2	96	650 x 550	TL204S	2CPX010106R9999	TL204SB	2CPX010327R9999
		3	144	650 x 800	TL304S	2CPX010107R9999	TL304SB	2CPX010328R9999
		4	192	650 x 1050	TL404S	2CPX010108R9999	TL404SB	2CPX010329R9999
		5	240	650 x 1300	TL504S	2CPX010109R9999	TL504SB	2CPX010330R9999
5	1	1	60	800 x 300	TL105S	2CPX010110R9999	TL105SB	2CPX010331R9999
		2	120	800 x 550	TL205S	2CPX010111R9999	TL205SB	2CPX010332R9999
		3	180	800 x 800	TL305S	2CPX010112R9999	TL305SB	2CPX010333R9999
		4	240	800 x 1050	TL405S	2CPX010113R9999	TL405SB	2CPX010334R9999
		5	300	800 x 1300	TL505S	2CPX010114R9999	TL505SB	2CPX010335R9999
6	2	1	72	950 x 300	TL106S	2CPX010115R9999	TL106SB	2CPX010336R9999
		2	144	950 x 550	TL206S	2CPX010116R9999	TL206SB	2CPX010337R9999
		3	216	950 x 800	TL306S	2CPX010117R9999	TL306SB	2CPX010338R9999
		4	288	950 x 1050	TL406S	2CPX010118R9999	TL406SB	2CPX010339R9999
		5	360	950 x 1300	TL506S	2CPX010119R9999	TL506SB	2CPX010340R9999
7	3	1	84	1100 x 300	TL107S	2CPX010120R9999	TL107SB	2CPX010341R9999
		2	168	1100 x 550	TL207S	2CPX010121R9999	TL207SB	2CPX010342R9999
		3	252	1100 x 800	TL307S	2CPX010122R9999	TL307SB	2CPX010343R9999
		4	336	1100 x 1050	TL407S	2CPX010123R9999	TL407SB	2CPX010344R9999
		5	420	1100 x 1300	TL507S	2CPX010124R9999	TL507SB	2CPX010345R9999
8	4	1	96	1250 x 300	TL108S	2CPX010125R9999	TL108SB	2CPX010346R9999
		2	192	1250 x 550	TL208S	2CPX010126R9999	TL208SB	2CPX010347R9999
		3	288	1250 x 800	TL308S	2CPX010127R9999	TL308SB	2CPX010348R9999
		4	384	1250 x 1050	TL408S	2CPX010128R9999	TL408SB	2CPX010349R9999
		5	480	1250 x 1300	TL508S	2CPX010129R9999	TL508SB	2CPX010350R9999
9	5	1	108	1400 x 300	TL109S	2CPX010130R9999	TL109SB	2CPX010351R9999
		2	216	1400 x 550	TL209S	2CPX010131R9999	TL209SB	2CPX010352R9999
		3	324	1400 x 800	TL309S	2CPX010132R9999	TL309SB	2CPX010353R9999
		4	432	1400 x 1050	TL409S	2CPX010133R9999	TL409SB	2CPX010354R9999
		5	540	1400 x 1300	TL509S	2CPX010134R9999	TL509SB	2CPX010355R9999

*1 When expanding as an installation distributor with meter and distributor fields, combination sets or CombiLine modules

*2 External dimensions are without flange embossing.

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine-W wall cabinets, cabinet depth 350 mm ⏚

TW306G

Included in the scope of delivery

- External mounting brackets
- Mounting rails with left and right mounting frame brackets, as well as an additional mounting rail for cabinets with field width 4 and above
- Supports for expansion with meter and distributor fields, combination sets or CombiLine modules on EDF mounting frame
- Support for expansion with CombiLine modules on WR mounting frame and mounting plates, by removing the EDF Adapter

Order accessories separately

- Flanges
- Touch protection for expansion with meter and distributor fields, combination sets or CombiLine modules

Height		Width		External dimensions*2	Wall cabinets with door IP55		Wall cabinets without door IP30*1	
GU	OH	PW	PLE	H x W in mm	Type	Order code	Type	Order code
4	0	1	48	650 x 300	TW104G	2CPX010140R9999	TW104GB	2CPX010361R9999
		2	96	650 x 550	TW204G	2CPX010141R9999	TW204GB	2CPX010362R9999
		3	144	650 x 800	TW304G	2CPX010142R9999	TW304GB	2CPX010363R9999
		4	192	650 x 1050	TW404G	2CPX010143R9999	TW404GB	2CPX010364R9999
		5	240	650 x 1300	TW504G	2CPX010144R9999	TW504GB	2CPX010365R9999
5	1	1	60	800 x 300	TW105G	2CPX010202R9999	TW105GB	2CPX010366R9999
		2	120	800 x 550	TW205G	2CPX010203R9999	TW205GB	2CPX010367R9999
		3	180	800 x 800	TW305G	2CPX010204R9999	TW305GB	2CPX010368R9999
		4	240	800 x 1050	TW405G	2CPX010205R9999	TW405GB	2CPX010369R9999
		5	300	800 x 1300	TW505G	2CPX010206R9999	TW505GB	2CPX010370R9999
6	2	1	72	950 x 300	TW106G	2CPX010145R9999	TW106GB	2CPX010371R9999
		2	144	950 x 550	TW206G	2CPX010146R9999	TW206GB	2CPX010372R9999
		3	216	950 x 800	TW306G	2CPX010147R9999	TW306GB	2CPX010373R9999
		4	288	950 x 1050	TW406G	2CPX010148R9999	TW406GB	2CPX010374R9999
		5	360	950 x 1300	TW506G	2CPX010149R9999	TW506GB	2CPX010375R9999
7	3	1	84	1100 x 300	TW107G	2CPX010150R9999	TW107GB	2CPX010376R9999
		2	168	1100 x 550	TW207G	2CPX010151R9999	TW207GB	2CPX010377R9999
		3	252	1100 x 800	TW307G	2CPX010152R9999	TW307GB	2CPX010378R9999
		4	336	1100 x 1050	TW407G	2CPX010153R9999	TW407GB	2CPX010379R9999
		5	420	1100 x 1300	TW507G	2CPX010154R9999	TW507GB	2CPX010380R9999
8	4	1	96	1250 x 300	TW108G	2CPX010155R9999	TW108GB	2CPX010381R9999
		2	192	1250 x 550	TW208G	2CPX010156R9999	TW208GB	2CPX010382R9999
		3	288	1250 x 800	TW308G	2CPX010157R9999	TW308GB	2CPX010383R9999
		4	384	1250 x 1050	TW408G	2CPX010158R9999	TW408GB	2CPX010384R9999
		5	480	1250 x 1300	TW508G	2CPX010159R9999	TW508GB	2CPX010385R9999
9	5	1	108	1400 x 300	TW109G	2CPX010160R9999	TW109GB	2CPX010386R9999
		2	216	1400 x 550	TW209G	2CPX010161R9999	TW209GB	2CPX010387R9999
		3	324	1400 x 800	TW309G	2CPX010162R9999	TW309GB	2CPX010388R9999
		4	432	1400 x 1050	TW409G	2CPX010163R9999	TW409GB	2CPX010389R9999
		5	540	1400 x 1300	TW509G	2CPX010164R9999	TW509GB	2CPX010390R9999

*1 When expanding as an installation distributor with meter and distributor fields, combination sets or CombiLine modules

*2 External dimensions are without flange embossing.

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine-W wall cabinets, cabinet depth 350 mm

TW306S

Included in the scope of delivery

- External mounting brackets
- Touch protection
- Mounting rails with left and right mounting frame brackets, as well as an additional mounting rail for cabinets with field width 4 and above
- Supports for expansion with meter and distributor fields, combination sets or CombiLine modules on EDF mounting frame
- Support for expansion with CombiLine modules on WR mounting frame, by removing the EDF Adapter

Order accessories separately

- Flanges

Height		Width		External dimensions*2	Wall cabinets with door IP55		Wall cabinets without door IP30*1	
GU	OH	PW	PLE	H x W in mm	Type	Order code	Type	Order code
4	0	1	48	650 x 300	TW104S	2CPX010171R9999	TW104SB	2CPX010397R9999
		2	96	650 x 550	TW204S	2CPX010172R9999	TW204SB	2CPX010398R9999
		3	144	650 x 800	TW304S	2CPX010173R9999	TW304SB	2CPX010399R9999
		4	192	650 x 1050	TW404S	2CPX010174R9999	TW404SB	2CPX010400R9999
		5	240	650 x 1300	TW504S	2CPX010175R9999	TW504SB	2CPX010401R9999
5	1	1	60	800 x 300	TW105S	2CPX010207R9999	TW105SB	2CPX010402R9999
		2	120	800 x 550	TW205S	2CPX010208R9999	TW205SB	2CPX010403R9999
		3	180	800 x 800	TW305S	2CPX010209R9999	TW305SB	2CPX010404R9999
		4	240	800 x 1050	TW405S	2CPX010210R9999	TW405SB	2CPX010405R9999
		5	300	800 x 1300	TW505S	2CPX010211R9999	TW505SB	2CPX010406R9999
6	2	1	72	950 x 300	TW106S	2CPX010176R9999	TW106SB	2CPX010407R9999
		2	144	950 x 550	TW206S	2CPX010177R9999	TW206SB	2CPX010408R9999
		3	216	950 x 800	TW306S	2CPX010178R9999	TW306SB	2CPX010409R9999
		4	288	950 x 1050	TW406S	2CPX010179R9999	TW406SB	2CPX010410R9999
		5	360	950 x 1300	TW506S	2CPX010180R9999	TW506SB	2CPX010411R9999
7	3	1	84	1100 x 300	TW107S	2CPX010181R9999	TW107SB	2CPX010412R9999
		2	168	1100 x 550	TW207S	2CPX010182R9999	TW207SB	2CPX010413R9999
		3	252	1100 x 800	TW307S	2CPX010183R9999	TW307SB	2CPX010414R9999
		4	336	1100 x 1050	TW407S	2CPX010184R9999	TW407SB	2CPX010415R9999
		5	420	1100 x 1300	TW507S	2CPX010185R9999	TW507SB	2CPX010416R9999
8	4	1	96	1250 x 300	TW108S	2CPX010186R9999	TW108SB	2CPX010417R9999
		2	192	1250 x 550	TW208S	2CPX010187R9999	TW208SB	2CPX010418R9999
		3	288	1250 x 800	TW308S	2CPX010188R9999	TW308SB	2CPX010419R9999
		4	384	1250 x 1050	TW408S	2CPX010189R9999	TW408SB	2CPX010420R9999
		5	480	1250 x 1300	TW508S	2CPX010190R9999	TW508SB	2CPX010421R9999
9	5	1	108	1400 x 300	TW109S	2CPX010191R9999	TW109SB	2CPX010422R9999
		2	216	1400 x 550	TW209S	2CPX010192R9999	TW209SB	2CPX010423R9999
		3	324	1400 x 800	TW309S	2CPX010193R9999	TW309SB	2CPX010424R9999
		4	432	1400 x 1050	TW409S	2CPX010194R9999	TW409SB	2CPX010425R9999
		5	540	1400 x 1300	TW509S	2CPX010195R9999	TW509SB	2CPX010426R9999

*1 When expanding as an installation distributor with meter and distributor fields, combination sets or CombiLine modules

*2 External dimensions are without flange embossing.

TwinLine N 55 wall cabinets and floor-standing cabinets

Floor-standing cabinets

TwinLine N 55 wall cabinets and floor-standing cabinets

Floor-standing cabinets/technical specifications and product features

Specifications for TwinLine-G, -L and -W	
Standards/regulations	DIN EN 61439-1/-2/-3, DIN VDE 0660-600-1/-2/-3*[1]
Protection class	I, earthed
	II, insulated
Degree of protection	IP55 with door
	IP30 without door, when expanded as an installation distributor with meter and distributor fields, combination sets or CombiLine modules
Mechnical impact strength	IK08 for the cabinet housing with steel-sheet door
	IK07 in the area of flange knock-outs and for transparent doors
Ambient conditions	Indoor installation
	Ambient temperature max. + 40 °C
	Ambient temperature min. - 5 °C
	Operating temperature max. + 55 °C
	Storage temperature max. + 55 °C
	Storage temperature min. - 40 °C

Product features for TwinLine-G, -L and -W	
Housing and doors	Made of sheet steel, color RAL 7035, powder-coated
	A flange opening is cut out for each field width, knock-outs are on the side and bottom
	Door opening angle 180 degrees
	Double door cabinets with field width 4 and over
	Doors with rod lock
	Standard closure, double-bit 3 mm
Assembly options*	Prepared for expansion with CombiLine modules on WRmounting frame and mounting plates
	Prepared for expansion with meter and distributor fields, combination sets or CombiLine modules on EDF mounting frame, EDF adapter and middle support rails must be ordered separately as accessories
Forms of delivery	Enclosure with door
	Enclosure without door
	External mounting lugs are included in the scope of delivery
	Mounting strips with left and right mounting frame brackets, as well as an additional mounting strip for field width 4 and above cabinets, are included in the scope of delivery
	Touch protection for the insulated cabinet is included in the scope of delivery
	Touch protection for the earthed cabinet must be ordered separately as an accessory
Accessories	For housings without doors, the door can be ordered separately , as needed
	Flanges must be ordered separately
	Base must be ordered separately
	Touch protection for the earthed cabinet must be ordered separately
	EDF adapter must be ordered separately if required*
	Middle support rails must be ordered separately if required*

*[1] The permissible heating for switchgear combinations (SK) up to 630 A rated current can be verified using the procedure according to 10.10.4.2; for the required values of the power dissipation capacity, please refer to the tables starting on page ; above 630 A rated current, the procedure according to 10.10.4.3 (DIN EN 61439-1 supplementary sheet 2, DIN VDE 0660-600-1 supplementary sheet 2) must be applied

* For detailed description of the assembly options of floor-standing cabinets se next pages in this chapter.

TwinLine N 55 wall cabinets and floor-standing cabinets

Floor-standing cabinets/assembly options ⏚

TW312G

Additionally order touch protection

Additionally order EDF adapter

Additionally order middle support rail

Additionally order touch protection

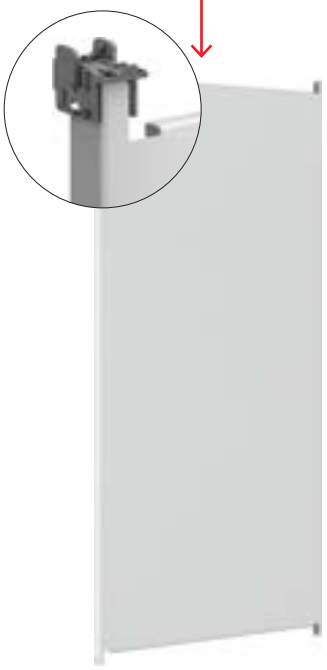

Mounting plate installation*
Expansion for control technology with mounting plate

EDF mounting frame installation
Expansion as an installation distributor with meter and distributor fields, combination sets or CombiLine modules on EDFmounting frame

Installation of WRmounting frame*
Expansion as an installation distributor with CombiLine modules on WR mounting frame

* The combination of mounting plate and WR mounting frame next to each other is possible.

TwinLine N 55 wall cabinets and floor-standing cabinets

Floor-standing cabinets/assembly options

TW312S

Touch protection included in the scope of delivery

Additionally order EDF adapter

Additionally order middle support rail

EDFmounting frame installation
Expansion as an installation distributor with meter and distributor fields, combination sets or CombiLine modules on EDF mounting frame

Touch protection included in the scope of delivery

Installation of WRmounting frame
Expansion as an installation distributor with CombiLine modules on WRmounting frame

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine -G, -L, W, floor-standing cabinets/cabinet depth 225/275/350 mm ⏚

TG312G

Included in the scope of delivery

- External mounting brackets
- Mounting rails with left and right mounting frame brackets, as well as an additional mounting rail for cabinets with field width 4 and above
- Supports for expansion with CombiLine modules on WR mounting frame and mounting plates

Order accessories separately

- Flanges
- Base
- Touch protection for expansion with CombiLine modules
- EDF adapters, middle support rails and touch protection for expansion with meter and distributor fields, combination sets or CombiLine modules on EDF mounting frame

Height		Width		External dimensions*2	Standing cabinets with door IP55		Standing cabinets without door IP30*1	
GU	OH	PW	PLE	H x W in mm	Type	Order code	Type	Order code
TwinLine-G, cabinet depth 225 mm ⏚								
12	8	1	144	1850 x 300	TG112G	2CPX010030R9999	TG112GB	2CPX010251R9999
		2	288	1850 x 550	TG212G	2CPX010031R9999	TG212GB	2CPX010252R9999
		3	432	1850 x 800	TG312G	2CPX010032R9999	TG312GB	2CPX010253R9999
		4	576	1850 x 1050	TG412G	2CPX010033R9999	TG412GB	2CPX010254R9999
		5	720	1850 x 1300	TG512G	2CPX010034R9999	TG512GB	2CPX010255R9999
TwinLine-L, cabinet depth 275 mm ⏚								
12	8	1	144	1850 x 300	TL112G	2CPX010100R9999	TL112GB	2CPX010321R9999
		2	288	1850 x 550	TL212G	2CPX010101R9999	TL212GB	2CPX010322R9999
		3	432	1850 x 800	TL312G	2CPX010102R9999	TL312GB	2CPX010323R9999
		4	576	1850 x 1050	TL412G	2CPX010103R9999	TL412GB	2CPX010324R9999
		5	720	1850 x 1300	TL512G	2CPX010104R9999	TL512GB	2CPX010325R9999
TwinLine-W cabinet depth 350 mm ⏚								
12	8	1	144	1850 x 300	TW112G	2CPX010165R9999	TW112GB	2CPX010391R9999
		2	288	1850 x 550	TW212G	2CPX010166R9999	TW212GB	2CPX010392R9999
		3	432	1850 x 800	TW312G	2CPX010167R9999	TW312GB	2CPX010393R9999
		4	576	1850 x 1050	TW412G	2CPX010168R9999	TW412GB	2CPX010394R9999
		5	720	1850 x 1300	TW512G	2CPX010169R9999	TW512GB	2CPX010395R9999
		6	864	1850 x 1550	TW612G	2CPX010170R9999	TW612GB	2CPX010396R9999

*1 When expanding as an installation distributor with meter and distributor fields, combination sets or CombiLine modules

*2 External dimensions are without flange embossing.

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine -G, -L, W, floor-standing cabinets/cabinet depth 225/275/350 mm

TG312S

Included in the scope of delivery

- External mounting brackets
- Touch protection
- Mounting rails with left and right mounting frame brackets, as well as an additional mounting rail for cabinets with field width 4 and above
- Supports for expansion with CombiLine modules on WRmounting frame

Order accessories separately

- Flanges
- Base
- EDF adapters and middle support rails for expansion with meter and distributor fields, combination sets or CombiLine modules on EDF mounting frame

Height		Width		External dimensions*2	Standing cabinets with door IP55		Standing cabinets without door IP30*1	
GU	OH	PW	PLE	H x W in mm	Type	Order code	Type	Order code
TwinLine-G, cabinet depth 225 mm								
12	8	1	144	1850 x 300	TG112S	2CPX010065R9999	TG112SB	2CPX010286R9999
		2	288	1850 x 550	TG212S	2CPX010066R9999	TG212SB	2CPX010287R9999
		3	432	1850 x 800	TG312S	2CPX010067R9999	TG312SB	2CPX010288R9999
		4	576	1850 x 1050	TG412S	2CPX010068R9999	TG412SB	2CPX010289R9999
		5	720	1850 x 1300	TG512S	2CPX010069R9999	TG512SB	2CPX010290R9999
TwinLine-L, cabinet depth 275 mm								
12	8	1	144	1850 x 300	TL112S	2CPX010135R9999	TL112SB	2CPX010356R9999
		2	288	1850 x 550	TL212S	2CPX010136R9999	TL212SB	2CPX010357R9999
		3	432	1850 x 800	TL312S	2CPX010137R9999	TL312SB	2CPX010358R9999
		4	576	1850 x 1050	TL412S	2CPX010138R9999	TL412SB	2CPX010359R9999
		5	720	1850 x 1300	TL512S	2CPX010139R9999	TL512SB	2CPX010360R9999
TwinLine-W cabinet depth 350 mm								
12	8	1	144	1850 x 300	TW112S	2CPX010196R9999	TW112SB	2CPX010427R9999
		2	288	1850 x 550	TW212S	2CPX010197R9999	TW212SB	2CPX010428R9999
		3	432	1850 x 800	TW312S	2CPX010198R9999	TW312SB	2CPX010429R9999
		4	576	1850 x 1050	TW412S	2CPX010199R9999	TW412SB	2CPX010430R9999
		5	720	1850 x 1300	TW512S	2CPX010200R9999	TW512SB	2CPX010431R9999
		6	864	1850 x 1550	TW612S	2CPX010201R9999	TW612SB	2CPX010432R9999

*1 When expanding as an installation distributor with meter and distributor fields, combination sets or CombiLine modules

*2 External dimensions are without flange embossing.

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine-X, Floor standing cabinets, side-by-side assembly

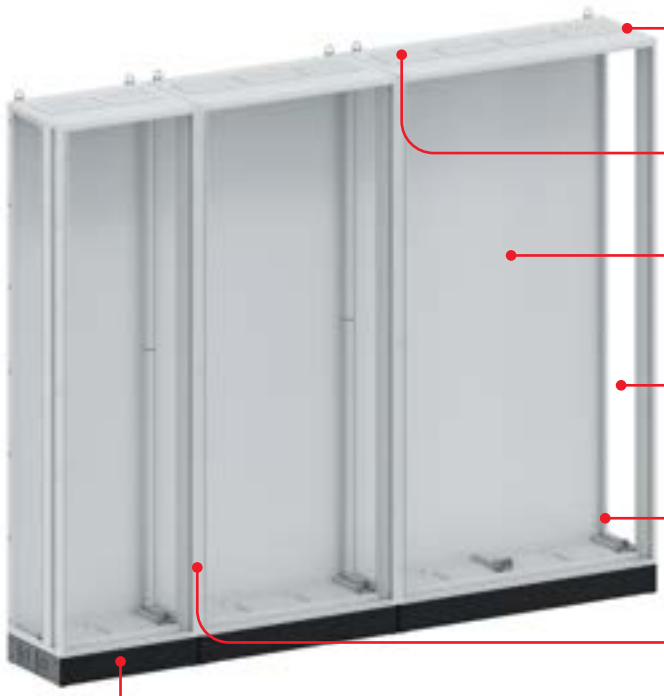

Cabinet depth 400 mm

Wide range of flanges, which can be used for the complete cabinet system

Earthed and double insulated

Open side panel for optimal busbar feed-through

Prepared to be fitted with the CombiLine N modules on WR mounting frame

Flexible configuration thanks to side-by-side connection

Easy to assemble due to uniform accessory concept of the complete cabinet system

TwinLine N 55 wall cabinets and floor-standing cabinets

Floor standing cabinets/technical specifications and product features

TwinLine-X with door, IP55 ⏚	
Standards/regulations	DIN EN 62208, DIN EN 61439-1/-2/-3, DIN VDE 0660-600-1/-2/-3*[1]
Degree of protection	IP55 with door
	IP30 without door, when expanded as an installation distributor with meter and distributor fields, combination sets or CombiLine modules
Mechanical impact strength	IK08 for the cabinet enclosure with sheet steel door
	IK07 in the area of flange knock-outs and for transparent doors
Ambient conditions	Indoor installations
	Ambient air temperature max. + 40 °C
	Ambient air temperature min. -5 °C
	Operating temperature max. + 55 °C
	Storage temperature max. + 55 °C
	Storage temperature min. - 5 °C
Enclosure and doors	Sheet steel, colour RAL 7035, powder-coated
	For each panel width, there is one flange opening at the top and one knockout at the bottom
	Door opening angle 180 degrees
	For cabinets with four panel widths double-wing doors
	Doors with espagnolette closure
	Standard closure double bit 3 mm
Internal configuration options*[2]	Prepared to be fitted with CombiLine modules to WR mounting frame and mounting plates
Delivery forms	Enclosure with door
	Enclosure without door
	External mounting brackets included in the scope of delivery
	The mounting rails with mounting frame holders for right and left and also an additional mounting rail for cabinets with four panel widths are included in the scope of delivery
	A touch guard for the double insulated cabinet is included in the scope of delivery
	The touch guard for the earthed cabinet must be ordered separately as accessory
Accessories	Side panels must be ordered separately
	The connection set must be ordered separately
	Flanges must be ordered separately
	Plinths must be ordered separately
	The touch guard for the earthed cabinet must be ordered separately

*[1] The permissible heating for switchgear assemblies up to a rated current of 630 A can be verified with the procedure according to section 10.10.4.2; for the required values of the power loss capacity, please refer to the table on page 21; above a rated current of 630 A, the procedure in accordance with 10.10.4.3 (DIN EN 61439-1 supplement 2, DIN VDE 0660-600-1 supplement 2) must be applied

*[2] For a more detailed description of the installation options for floor-standing cabinets

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine-X / assembly options ⏚

TX312G

Touch guard
to be ordered separately

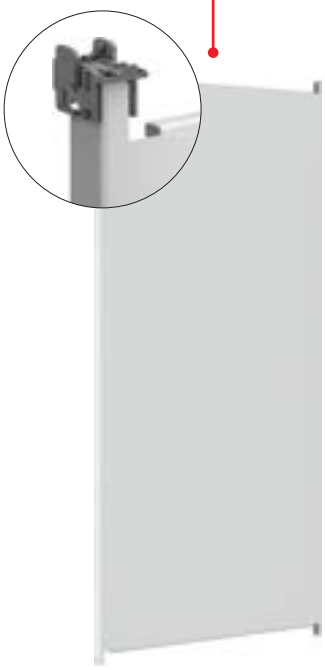

Fitting of the mounting plate*
Construction for control systems
with mounting plate

Assembly with WR mounting frame*
Internal configuration as
sub-distribution board
with CombiLine modules
on WR mounting frame

* The combination of the individual construction variants next to each other is possible

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine-X / assembly options

TX312S

Touch guard
included in the scope of delivery

Assembly with WR mounting frame
Internal configuration as sub-distribution board with CombiLine modules on WR mounting frame

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine-X, floor standing cabinet, depth 400mm ⏚

TX312G

Delivery contains

- External mounting brackets
- Mounting rails with mounting frame holder right and left
- For cabinets with 4 panel widths there is an additional mounting fixture for the internal configuration with CombiLine modules on WR mounting frame and mounting plates

Accessories to be ordered separately

- Side panel
- Touch guard for an internal configuration with CombiLine modules
- Flanges
- Plinths
- Connection set

Height		Width		External dimensions**		Standing cabinets with door IP55		Standing cabinets without door IP30**	
GU	OH	PW	SU	H x W (mm)	Unit	Type	Order code	Type	Order code
TwinLine-X, cabinet depth 400 mm ⏚									
		2	288	1850 x 550	1	TX212G	2CPX010974R9999	TX212GB	2CPX011021R9999
12	8	3	432	1850 x 800	1	TX312G	2CPX010975R9999	TX312GB	2CPX011022R9999
		4	576	1850 x 1050	1	TX412G	2CPX010976R9999	TX412GB	2CPX011023R9999

Article		External dimensions H x D (mm)	Pcs	Type	Order code
TX012G	**Side panel** for TwinLine-X,	1850 x 400	2	TZX012G	2CPX010987R9999
TZ662	**Connection set** for side-by-side assemblys		1	TZ662	2CPX010989R9999

* When expanding as an installation distributor with meter and distributor fields, combination sets or CombiLine modules

** External dimensions are without flange embossing

TwinLine N 55 wall cabinets and floor-standing cabinets

TwinLine-X, floor standing cabinet, depth 400mm

TX312S

Delivery contains

- External mounting brackets
- Mounting rails with mounting frame holder right and left
- For cabinets with 4 panel widths there is an additional mounting fixture for the internal configuration with CombiLine modules on WR mounting frame
- Touch guard

Accessories to be ordered separately

- Side panel
- Flanges
- Plinth
- Connection set

Height		Width	SU	External dimensions**		Standing cabinets with door IP55		Standing cabinets without door IP30**	
GU	OH	PW		H x W (mm)	Unit	Type	Order code	Type	Order code
TwinLine-X, cabinet depth 400 mm									
		2	288	1850 x 550	1	TX212S	2CPX010977R9999	TX212SB	2CPX011024R9999
12	8	3	432	1850 x 800	1	TX312S	2CPX010978R9999	TX312SB	2CPX011025R9999
		4	576	1850 x 1050	1	TX412S	2CPX010979R9999	TX412SB	2CPX011026R9999

Article		External dimensions H x D (mm)	Pcs	Type	Order code
TX012S	**Side panel** for TwinLine-X	1850 x 400	2	TZX012S	2CPX010988R9999
TZ663	**Connection set** for side-by-side assemblys		1	TZ663	2CPX010994R9999

*1 When expanding as an installation distributor with meter and distributor fields, combination sets or CombiLine modules

*2 External dimensions are without flange embossing

TwinLine N accessories

IP55 flanges

TZ101



TZ110

TZ111

TZ102

TZ103

TZ112

TZ104

TZ105

TZ107

TZ106

RZF10

RZF9

Article	Unit	Type	Order code
Membrane flange Material plastic			
With 52 cable sleeves 2 x 6 - 32,5 mm, 2 x 6 - 25 mm, 4 x 6 - 19 mm, 10 x 6 - 15 mm, 2 x 6 - 12 mm, 31 x 6 - 11 mm, 1 x 6 - 7 mm	1	TZ101	2CPX010450R9999
	10	TZ101P10	2CPX010451R9999
	100	TZ101P100	2CPX010826R9999
With 8 membrane entries For cables sections 8 x 13 – 34 mm	1	TZ110	2CPX010850R9999
	10	TZ110P10	2CPX010934R9999
With 12 membrane entries and 1 cable sleeve entry For cable diameter 1 x 14 to 54 mm, 3 x 13 to 34 mm, 3 x 13 to 26,5 mm, 4 x 5 to 21 mm, 1 x 6 to 15 mm	1	TZ111	2CPX010851R9999
	10	TZ111P10	2CPX010935R9999
Flanges for M-screw joints Material plastic			
1 x M63/M50, 2 x M32/M20, 5 x M25, 5 x M20	1	TZ102	2CPX010452R9999
	10	TZ102P10	2CPX010453R9999
4 x M20/M25, 18 x M20	1	TZ103	2CPX010454R9999
	10	TZ103P10	2CPX010455R9999
Flanges with cable sleeves Material plastic			
With 1 cable sleeve For cable diameter 1 x 14 to 68 mm	1	TZ112	2CPX010852R9999
With 2 cable sleeve For cable diameter 2 x 14 to 68 mm	1	TZ104	2CPX010456R9999
	10	TZ104P10	2CPX010932R9999
With 3 cable sleeve For cable diameter 3 x 14 to 54 mm	1	TZ105	2CPX010457R9999
	10	TZ105P10	2CPX010933R9999
Locking flanges			
Material plastic	1	TZ107	2CPX010460R9999
	10	TZ107P10	2CPX010461R9999
Material steel sheet For earthed cabinets	1	TZ106	2CPX010458R9999
	10	TZ106P10	2CPX010459R9999
Cable sleeves made of PVC for material thickness 2 - 3 mm			
For cable diameter 14 - 54 mm Hole diameter 68 mm	1	RZF9	2CPX046612R9999
For cable diameter 14 - 68 mm Hole diameter 75 mm	10	RZF10	2CPX046613R9999

TwinLine N accessories

Base for wall cabinets and standing cabinets

TZW305

TZW310

TZ627P2

TZ323

ZK143

Article	Depth mm	Width PW	Width mm	Unit	Type	Order code
Base, height 50 mm, color RAL 9005						
For TwinLine-G and H	225	1	300	1	TZG105	2CPX010571R9999
	225	2	550	1	TZG205	2CPX010573R9999
	225	3	800	1	TZG305	2CPX010575R9999
	225	4	1050	1	TZG405	2CPX010577R9999
	225	5	1300	1	TZG505	2CPX010579R9999
For TwinLine-L*	275	1	300	1	TZL105	2CPX010581R9999
	275	2	550	1	TZL205	2CPX010583R9999
	275	3	800	1	TZL305	2CPX010585R9999
	275	4	1050	1	TZL405	2CPX010587R9999
	275	5	1300	1	TZL505	2CPX010589R9999
For TwinLine-W*	350	1	300	1	TZW105	2CPX010661R9999
	350	2	550	1	TZW205	2CPX010663R9999
	350	3	800	1	TZW305	2CPX010665R9999
	350	4	1050	1	TZW405	2CPX010667R9999
	350	5	1300	1	TZW505	2CPX010669R9999
	350	6	1550	1	TZW605	2CPX010671R9999
Für TwinLine-X**	400	2	550	1	TZX205	2CPX010981R9999
	400	3	800	1	TZX305	2CPX010982R9999
	400	4	1050	1	TZX405	2CPX010983R9999
Base, height 100 mm, color RAL 9005						
For TwinLine-G and H Side knock-outs 1 x M32/M50 or 80 x 80 mm	225	1	300	1	TZG110	2CPX010572R9999
	225	2	550	1	TZG210	2CPX010574R9999
	225	3	800	1	TZG310	2CPX010576R9999
	225	4	1050	1	TZG410	2CPX010578R9999
	225	5	1300	1	TZG510	2CPX010580R9999
For TwinLine-L* Side knock-outs 1 x M32/M50 or 80 x 80 mm	275	1	300	1	TZL110	2CPX010582R9999
	275	2	550	1	TZL210	2CPX010584R9999
	275	3	800	1	TZL310	2CPX010586R9999
	275	4	1050	1	TZL410	2CPX010588R9999
	275	5	1300	1	TZL510	2CPX010590R9999
For TwinLine-W* Side knock-outs 2 x M32/M50 or 2 x 80 x 80 mm	350	1	300	1	TZW110	2CPX010662R9999
	350	2	550	1	TZW210	2CPX010664R9999
	350	3	800	1	TZW310	2CPX010666R9999
	350	4	1050	1	TZW410	2CPX010668R9999
	350	5	1300	1	TZW510	2CPX010670R9999
	350	6	1550	1	TZW610	2CPX010672R9999
For TwinLine-X** Side knock-outs 2 x M32/M50 or 2 x 80 x 80 mm	400	2	550	1	TZX210	2CPX010984R9999
	400	3	800	1	TZX310	2CPX010985R9999
	400	4	1050	1	TZX410	2CPX010986R9999
Base mounting lug Optinal to fasten the plinth to the cabinet from the outside For plinth height 50 mm and 100 mm				2	TZ627P2	2CPX010853R9999
Cable clamp rail For plinth, height 100 mm		1	250	1	TZ321	2CPX010473R9999
		2	500	1	TZ322	2CPX010474R9999
		3	750	1	TZ323	2CPX010475R9999
		4	1000	1	TZ324	2CPX010476R9999
		5	1250	1	TZ325	2CPX010477R9999
		6	1500	1	TZ326	2CPX010478R9999
Bolt clamp For cable clamp rail						
From 22 to 28 mm				1	ZK143	2CPX060005R9999
From 40 to 46 mm				1	ZK144	2CPX060006R9999
From 64 to 70 mm				1	ZK145	2CPX060007R9999

* For plinth for field widths of 4 or more, a plinth stiffener is included in the scope of delivery
** For plinth for TwinLine-X plinth stiffener is included in the scope of delivery

TwinLine N accessories

Lock replacement parts

Article		Unit	Type	Order code
TZ507 TZ508	**Key plates for actuation pins**			
	For actuation pin 3 mm (standard)* and 5 mm (similar to RAL 9005)	1	TZ507	2CPX010491R9999
	For triangular and rectangular actuator pin, as well as for Daimler-Benz insert	1	TZ508	2CPX010492R9999
ZH130 ZH132 ZH134 ZH137	**Actuating pins**			
	Double bit 3 mm*	1	ZH130	2CPX060490R9999
	Double bit 5 mm	1	ZH131	2CPX060491R9999
	Triangle 7 mm	1	ZH132	2CPX060492R9999
	Triangle 8 mm	1	ZH133	2CPX060493R9999
	Rectangular 6 mm	1	ZH134	2CPX060494R9999
	Rectangular 7 mm	1	ZH135	2CPX060495R9999
	Rectangular 8 mm	1	ZH136	2CPX060496R9999
	Daimler-Benz	1	ZH137	2CPX060497R9999
 TZ503 TZ504	**L-handle**			
	With key plate, with lock (EK333)	1	TZ503	2CPX010487R9999
	With key plate, without lock	1	TZ504	2CPX010488R9999
 TZ505 TZ506	**T-handle**			
	With key plate, with lock (EK333)	1	TZ505	2CPX010489R9999
	With key plate, without lock	1	TZ506	2CPX010490R9999
TZ510	**Swivel handle** For profile half cylinder 40 mm (30/10) with sealing cap	1	TZ510	2CPX010494R9999
ZH142	**Blindeinsatz** Instead of a profile half cylinder for swivel handle TZ510	1	ZH142	2CPX060502R9999

* Replacement part included in the scope of delivery

TwinLine N accessories

Lock replacement parts

Article		Unit	Type	Order code
ZH91	**Universal key** Double bit 3 mm/5 mm Triangular 8 mm, square 6 mm/8 mm	1	ZH91	2CPX066091R9999
	Double bit 3 mm*	1	ZH160	2CPX060660R9999
	Double bit 5 mm	1	ZH161	2CPX060661R9999
	Triangle 7 mm	1	ZH157	2CPX060657R9999
ZH160 ZH157	Triangle 8 mm	1	ZH158	2CPX060658R9999
	Rectangular 6 mm	1	ZH162	2CPX060662R9999
	Rectangular 7 mm	1	ZH163	2CPX060663R9999
	Rectangular 8 mm	1	ZH164	2CPX060664R9999
ZH162 ZH165	Daimler-Benz	1	ZH165	2CPX060665R9999
TZ212	**Rod lock**			
	4 GU = 600 mm with lock body*	1	TZ204	2CPX010462R9999
	5 GU = 750 mm with lock body*	1	TZ205	2CPX010463R9999
	6 GU = 900 mm with lock body*	1	TZ206	2CPX010464R9999
	7 GU = 1050 mm with lock body*	1	TZ207	2CPX010465R9999
	8 GU = 1200 mm with lock body*	1	TZ208	2CPX010466R9999
	9 GU = 1350 mm with lock body*	1	TZ209	2CPX010467R9999
	12 GU = 1800 mm with lock body*	1	TZ212	2CPX010468R9999
TZ511	**Rod guide***	1	TZ511	2CPX010495R9999
TZ501	**Bumper shoe*** For rod lock	1	TZ501	2CPX010485R9999
TZ502	**Rubber seal *** For double door	1	TZ502	2CPX010486R9999

* Replacement part included in the scope of delivery

TwinLine N accessories

General accessories

TZ601

TZ604

TZ605

TZ606

TZ631P10

TZ632P10

Article	Unit	Unmounted Type	Unmounted Order code	Installed in the cabinet* Type	Installed in the cabinet* Order code
Mounting strips[*1] For mounting frame holder					
For TwinLine-G	1	TZ601	2CPX010779R9999	TZ601A	2CPX010787R9999
	10	TZ601P10	2CPX010814R9999	-	-
	100	TZ601P100	2CPX010815R9999	-	-
For TwinLine-L	1	TZ602	2CPX010780R9999	TZ602A	2CPX010788R9999
	10	TZ602P10	2CPX010816R9999	-	-
	100	TZ602P100	2CPX010817R9999	-	-
For TwinLine-W	1	TZ603	2CPX010781R9999	TZ603A	2CPX010789R9999
	10	TZ603P10	2CPX010818R9999	-	-
	100	TZ603P100	2CPX010819R9999	-	-
For TwinLine-X	1	TZ660	2CPX010991R9999	TZ660A	2CPX010993R9999
	10	TZ660P10	2CPX010992R9999	-	-
Mounting frame holder middle[*1], **incl. mounting bolts** For expansion with WR and EDF mounting frame or mounting plates side by side	1	TZ604	2CPX010782R9999	TZ604A	2CPX010790R9999
	10	TZ604P10	2CPX010820R9999	-	-
	100	TZ604P100	2CPX010821R9999	-	-
Mounting frame holder[*1] **left or right, incl. mounting bolts** For expansion with WR and EDF mounting frame or mounting plates or middle support rails	1	TZ605	2CPX010783R9999	TZ605A	2CPX010791R9999
	10	TZ605P10	2CPX010822R9999	-	-
	100	TZ605P100	2CPX010823R9999	-	-
EDF adapter[*1] For mounting frame holder For expansion with EDF mounting frame	1	TZ606	2CPX010784R9999	TZ606A	2CPX010792R9999
	10	TZ606P10	2CPX010824R9999	-	-
	100	TZ606P100	2CPX010825R9999	-	-
Mounting bolt[*2] For TZ604 mounting frame holder in the middle	10	TZ631P10	2CPX010930R9999	-	-
Mounting bolt[*2] For TZ605 mounting frame holder right or left	10	TZ632P10	2CPX010931R9999	-	-

* Only in conjunction with the factory-installed meter and distributor fields, combination kits or CombiLine modules

[*1] Additionally required depending on the expansion; see below for details

[*2] Included in the scope of delivery



Position of the mounting strips with mounting frame holder Top view

Factory-installed
Mounting strips with left and right mounting frame brackets, as well as an additional mounting strip for cabinets with field width 4 and above

Can be retrofitted
Depending on the expansion, additional mounting strips, mounting frame holder and EDF adapter are required

TwinLine N accessories

General accessories

TZ313

TZ433

Article	Unit	Unmounted		Installed in the cabinet*	
		Type	Order code	Type	Order code
Cable clamp rails For mounting in the cabinet For TwinLine-L and TwinLine-W					
Field width 1 = 250 mm	1	TZ311	2CPX010469R9999	TZ311A	2CPX010808R9999
Field width 2 = 500 mm	1	TZ312	2CPX010470R9999	TZ312A	2CPX010809R9999
Field width 3 = 750 mm	1	TZ313	2CPX010471R9999	TZ313A	2CPX010810R9999
Field width 4 = 1000 mm	1	TZ314	2CPX010472R9999	TZ314A	2CPX010811R9999
Field width 5 = 1250 mm	1	TZ315	2CPX010785R9999	TZ315A	2CPX010812R9999
Field width 6 = 1500 mm	1	TZ316	2CPX010786R9999	TZ316A	2CPX010813R9999
Middle support rails For mounting in the cabinet, mounting brackets are included in the scope of delivery 2 mounting strips are additionally needed (TZ601, TZ602 or TZ603, depending on the cabinet depth).					
Field width 1 = 250 mm	1	TZ431	2CPX010960R9999	TZ431A	2CPX010966R9999
Field width 2 = 500 mm	1	TZ432	2CPX010961R9999	TZ432A	2CPX010967R9999
Field width 3 = 750 mm	1	TZ433	2CPX010962R9999	TZ433A	2CPX010968R9999
Field width 4 = 1000 mm	1	TZ434	2CPX010963R9999	TZ434A	2CPX010969R9999
Field width 5 = 1250 mm	1	TZ435	2CPX010964R9999	TZ435A	2CPX010970R9999
Field width 6 = 1500 mm	1	TZ436	2CPX010965R9999	TZ436A	2CPX010971R9999

* Only in conjunction with the factory-installed meter and distributor fields, combination kits or CombiLine modules

ZW125P4

TZ615P4

TZ609

TZ608

TZ607

TZ630P10

Article	Unit	Type	Order code
External mounting lugs* To mount the cabinet on the wall	4	ZW125P4	2CPX062461R9999
Transport eye bolts	4	TZ615P4	2CPX010510R9999
IP55 protective frame for cabinet stacking			
Required for insulated cabinets	1	TZ609	2CPX010504R9999
Required for earthed cabinets	1	TZ626	2CPX010778R9999
IP55 Connection set for cabinet stacking For wall cabinets side by side or on top of each other order 1 x TZ608 For standing cabinets order 2 x TZ608	1	TZ608	2CPX010503R9999
Door hinge 180 degrees* Color RAL 9005	1	TZ607	2CPX010502R9999
Pin for door hinge 180 degrees*	10	TZ630P10	2CPX010929R9999

* Included in the scope of delivery

TwinLine N accessories

General accessories

ZL8

TZB004

TZ617P10

TZ628P10

TZ664P10

ZA6

ZA5

ZA123

TZ650

Article	Unit	Type	Order code
Door earthing set 10 mm²	1	ZL8	2CPX038001R9999
Door stiffening profile For cabinet height 4 and 5 GU	1	TZB004	2CPX010856R9999
Sealing plugs/connection plugs*1	10	TZ617P10	2CPX010512R9999
Blind plug* For hinge break	10	TZ628P10	2CPX010854R9999
Cover cap* For screws of the side panels or the cabinet connection TX	10	TZ664P10	2CPX010995R9999
DIN A4 plan pocket Self-adhesive with transparent sleeve and reinforced back	1	ZA6	2CPX038227R9999
	10	ZA6P10	2CPX062380R9999
Self-adhesive with transparent sleeve	10	ZA61P10	2CPX062375R9999
DIN A4 plan pocket Self-adhesive	1	ZA13	2CPX038233R9999
	10	ZA13P10	2CPX062381R9999
DIN A5 plan pocket Self-adhesive	1	ZA5	2CPX038228R9999
	10	ZA5P10	2CPX062382R9999
Plan pocket holder			
For ZA13 plan pocket to be screwed to the door reinforcing elements	1	ZA123	2CPX038471R9999
For ZA5 plan pocket to be screwed to the door reinforcing elements	1	ZA125	2CPX038472R9999
LED control cabinet light		TZ650	2CPX010972R9999

* Included in the scope of delivery

TwinLine N accessories

Accessories meter applications

TZ614



TZ610

TZ616



TZ634

TZ618

TZ620

Article	Unit	Unmounted		Installed in the cabinet*	
		Type	Order code	Type	Order code
Cover strip[*1] For meter field installation to cover the mounting points of the middle support rail in the insulated standing cabinet					
For TwinLine-G	1	TZ612	2CPX010507R9999	TZ612A	2CPX010796R9999
For TwinLine-L	1	TZ613	2CPX010508R9999	TZ613A	2CPX010797R9999
For TwinLine-W	1	TZ614	2CPX010509R9999	TZ614A	2CPX010798R9999
Inner cladding[*1] For meter fields, depth = 225 - 350 mm Additional profile for meter fields with 150 mm connection compartment at the top, in the insulated cabinet	1	TZ610	2CPX010505R9999	TZ610A	2CPX010795R9999
Mounting set For installation of meter fields in standing cabinets per field width (250 mm) additionally order 1 x TZ616	1	TZ616	2CPX010511R9999	TZ616A	2CPX010799R9999
Mounting set For installation of meter fields (DF... und BF..., 1V30A2B, 1V50A2B) in floor standing cabinets, per panel width order 1 x TZ634	1	TZ634	2CPX011000R999	TZ634A	2CPX010999R9999
Touch protection for earthed cabinets					
For single-level meter fields	1	TZ618	2CPX010673R9999	TZ618A	2CPX010800R9999
For dual-level meter fields	1	TZ619	2CPX010674R9999	TZ619A	2CPX010801R9999
Cabinet-cabinet connector					
5-pole for Cu 12 x 5 mm	1	TZ620	2CPX010793R9999	-	-
5-pole for Cu 2 x 12 x 5 mm	1	TZ621	2CPX010794R9999	-	-

> For further information on feed-in housings, see chapter on meter cabinets

* Only in conjunction with the factory-installed meter and distributor fields, combination kits or CombiLine modules

TwinLine N accessories

Steel-sheet doors with door hinges 180 degrees

TZB306

Height		Width			
GU	OH	PW	Remark	Type	Order code
4	0	1		TZB104	2CPX010528R9999
		2		TZB204	2CPX010535R9999
		3		TZB304	2CPX010542R9999
		4*	Left door	TZB204L	2CPX010549R9999
			Right door	TZB204R	2CPX010550R9999
		5*	Left door	TZB304L	2CPX010563R9999
			Right door	TZB204R	2CPX010550R9999
5	1	1		TZB105	2CPX010529R9999
		2		TZB205	2CPX010536R9999
		3		TZB305	2CPX010543R9999
		4*	Left door	TZB205L	2CPX010551R9999
			Right door	TZB205R	2CPX010552R9999
		5*	Left door	TZB305L	2CPX010564R9999
			Right door	TZB205R	2CPX010552R9999
6	2	1		TZB106	2CPX010530R9999
		2		TZB206	2CPX010537R9999
		3		TZB306	2CPX010544R9999
		4*	Left door	TZB206L	2CPX010553R9999
			Right door	TZB206R	2CPX010554R9999
		5*	Left door	TZB306L	2CPX010565R9999
			Right door	TZB206R	2CPX010554R9999
7	3	1		TZB107	2CPX010531R9999
		2		TZB207	2CPX010538R9999
		3		TZB307	2CPX010545R9999
		4*	Left door	TZB207L	2CPX010555R9999
			Right door	TZB207R	2CPX010556R9999
		5*	Left door	TZB307L	2CPX010566R9999
			Right door	TZB207R	2CPX010556R9999
8	4	1		TZB108	2CPX010532R9999
		2		TZB208	2CPX010539R9999
		3		TZB308	2CPX010546R9999
		4*	Left door	TZB208L	2CPX010557R9999
			Right door	TZB208R	2CPX010558R9999
		5*	Left door	TZB308L	2CPX010567R9999
			Right door	TZB208R	2CPX010558R9999
9	5	1		TZB109	2CPX010533R9999
		2		TZB209	2CPX010540R9999
		3		TZB309	2CPX010547R9999
		4*	Left door	TZB209L	2CPX010559R9999
			Right door	TZB209R	2CPX010560R9999
		5*	Left door	TZB309L	2CPX010568R9999
			Right door	TZB209R	2CPX010560R9999
12	8	1	Single door	TZB112	2CPX010534R9999
		2	Single door	TZB212	2CPX010541R9999
			Left door**	TZB112L	2CPX011027R9999
			Right door**	TZB112R	2CPX011028R9999
		3	Single door	TZB312	2CPX010548R9999
			Left door**	TZB1512L	2CPX011029R9999
			Right door**	TZB1512R	2CPX011030R9999
		4	Left door	TZB212L	2CPX010561R9999
			Right door	TZB212R	2CPX010562R9999
		5	Left door	TZB312L	2CPX010569R9999
			Right door	TZB212R	2CPX010562R9999
			Left door**	TZB2512L	2CPX011031R9999
			Right door**	TZB2512R	2CPX011032R9999
		6	Left door	TZB312L	2CPX010569R9999
			Right door	TZB312R	2CPX010570R9999

* Double doors field width 4 and over
** Double doors, divided in the middle

TwinLine N accessories

Doors with viewing glass and door hinges 180 degrees

TZT206

Height		Width			
GU	OH	PW	Remark*[1]	Type	Order code
4	0	2		TZT204	2CPX010860R9999
		3		TZT304	2CPX010867R9999
		4*	Left door	TZT204L	2CPX010874R9999
			Right door	TZT204R	2CPX010875R9999
		5*	Left door	TZT304L	2CPX010888R9999
			Right door	TZT204R	2CPX010875R9999
5	1	2		TZT205	2CPX010861R9999
		3		TZT305	2CPX010868R9999
		4*	Left door	TZT205L	2CPX010876R9999
			Right door	TZT205R	2CPX010877R9999
		5*	Left door	TZT305L	2CPX010889R9999
			Right door	TZT205R	2CPX010877R9999
6	2	2		TZT206	2CPX010862R9999
		3		TZT306	2CPX010869R9999
		4*	Left door	TZT206L	2CPX010878R9999
			Right door	TZT206R	2CPX010879R9999
		5*	Left door	TZT306L	2CPX010890R9999
			Right door	TZT206R	2CPX010879R9999
7	3	2		TZT207	2CPX010863R9999
		3		TZT307	2CPX010870R9999
		4*	Left door	TZT207L	2CPX010880R9999
			Right door	TZT207R	2CPX010881R9999
		5*	Left door	TZT307L	2CPX010891R9999
			Right door	TZT207R	2CPX010881R9999
8	4	2		TZT208	2CPX010864R9999
		3		TZT308	2CPX010871R9999
		4*	Left door	TZT208L	2CPX010882R9999
			Right door	TZT208R	2CPX010883R9999
		5*	Left door	TZT308L	2CPX010892R9999
			Right door	TZT208R	2CPX010883R9999
9	5	2		TZT209	2CPX010865R9999
		3		TZT309	2CPX010872R9999
		4*	Left door	TZT209L	2CPX010884R9999
			Right door	TZT209R	2CPX010885R9999
		5*	Left door	TZT309L	2CPX010893R9999
			Right door	TZT209R	2CPX010885R9999
12	8	2		TZT212	2CPX010866R9999
		3		TZT312	2CPX010873R9999
		4*	Left door	TZT212L	2CPX010886R9999
			Right door	TZT212R	2CPX010887R9999
		5*	Left door	TZT312L	2CPX010894R9999
			Right door	TZT212R	2CPX010887R9999
		6*	Left door	TZT312L	2CPX010894R9999
			Right door	TZT312R	2CPX010895R9999

*Double doors field width 4 and over

TwinLine N accessories

Touch protection



TZP306

Height		Width	Touch protection not mounted		Touch protection Installed in the cabinet*	
GU	OH	PW	Type	Order code	Type	Order code
4	0	1	TZP104	2CPX010625R9999	TZP104A	2CPX010708R9999
		2	TZP204	2CPX010632R9999	TZP204A	2CPX010715R9999
		3	TZP304	2CPX010639R9999	TZP304A	2CPX010722R9999
		4	TZP404	2CPX010646R9999	TZP404A	2CPX010729R9999
		5	TZP504	2CPX010653R9999	TZP504A	2CPX010736R9999
5	1	1	TZP105	2CPX010626R9999	TZP105A	2CPX010709R9999
		2	TZP205	2CPX010633R9999	TZP205A	2CPX010716R9999
		3	TZP305	2CPX010640R9999	TZP305A	2CPX010723R9999
		4	TZP405	2CPX010647R9999	TZP405A	2CPX010730R9999
		5	TZP505	2CPX010654R9999	TZP505A	2CPX010737R9999
6	2	1	TZP106	2CPX010627R9999	TZP106A	2CPX010710R9999
		2	TZP206	2CPX010634R9999	TZP206A	2CPX010717R9999
		3	TZP306	2CPX010641R9999	TZP306A	2CPX010724R9999
		4	TZP406	2CPX010648R9999	TZP406A	2CPX010731R9999
		5	TZP506	2CPX010655R9999	TZP506A	2CPX010738R9999
7	3	1	TZP107	2CPX010628R9999	TZP107A	2CPX010711R9999
		2	TZP207	2CPX010635R9999	TZP207A	2CPX010718R9999
		3	TZP307	2CPX010642R9999	TZP307A	2CPX010725R9999
		4	TZP407	2CPX010649R9999	TZP407A	2CPX010732R9999
		5	TZP507	2CPX010656R9999	TZP507A	2CPX010739R9999
8	4	1	TZP108	2CPX010629R9999	TZP108A	2CPX010712R9999
		2	TZP208	2CPX010636R9999	TZP208A	2CPX010719R9999
		3	TZP308	2CPX010643R9999	TZP308A	2CPX010726R9999
		4	TZP408	2CPX010650R9999	TZP408A	2CPX010733R9999
		5	TZP508	2CPX010657R9999	TZP508A	2CPX010740R9999
9	5	1	TZP109	2CPX010630R9999	TZP109A	2CPX010713R9999
		2	TZP209	2CPX010637R9999	TZP209A	2CPX010720R9999
		3	TZP309	2CPX010644R9999	TZP309A	2CPX010727R9999
		4	TZP409	2CPX010651R9999	TZP409A	2CPX010734R9999
		5	TZP509	2CPX010658R9999	TZP509A	2CPX010741R9999
12	8	1	TZP112	2CPX010631R9999	TZP112A	2CPX010714R9999
		2	TZP212	2CPX010638R9999	TZP212A	2CPX010721R9999
		3	TZP312	2CPX010645R9999	TZP312A	2CPX010728R9999
		4	TZP412	2CPX010652R9999	TZP412A	2CPX010735R9999
		5	TZP512	2CPX010659R9999	TZP512A	2CPX010742R9999
		6	TZP612	2CPX010660R9999	TZP612A	2CPX010743R9999

* Only in conjunction with the factory-installed meter and distributor fields, combination kits or CombiLine modules

> The touch protection in the insulated cabinet is included in the scope of delivery

TwinLine N accessories

Mounting plates, sheet steel 2 mm, galvanized

TZM306

Height		Width	Mounting plate not mounted		Mounting plate mounted in the cabinet*[1]	
GU	OH	PW	Type	Order code	Type	Order code
4	0	1	TZM104	2CPX010591R9999	TZM104A	2CPX010744R9999
		2	TZM204	2CPX010598R9999	TZM204A	2CPX010750R9999
		3	TZM304	2CPX010605R9999	TZM304A	2CPX010756R9999
		4	TZM404	2CPX010612R9999	TZM404A	2CPX010762R9999
		5	TZM504	2CPX010619R9999	TZM504A	2CPX010768R9999
5	1	1	TZM105	2CPX010592R9999	TZM105A	2CPX010745R9999
		2	TZM205	2CPX010599R9999	TZM205A	2CPX010751R9999
		3	TZM305	2CPX010606R9999	TZM305A	2CPX010757R9999
		4	TZM405	2CPX010613R9999	TZM405A	2CPX010763R9999
		5	TZM505	2CPX010620R9999	TZM505A	2CPX010769R9999
6	2	1	TZM106	2CPX010593R9999	TZM106A	2CPX010746R9999
		2	TZM206	2CPX010600R9999	TZM206A	2CPX010752R9999
		3	TZM306	2CPX010607R9999	TZM306A	2CPX010758R9999
		4	TZM406	2CPX010614R9999	TZM406A	2CPX010764R9999
		5	TZM506	2CPX010621R9999	TZM506A	2CPX010770R9999
7	3	1	TZM107	2CPX010594R9999	TZM107A	2CPX010747R9999
		2	TZM207	2CPX010601R9999	TZM207A	2CPX010753R9999
		3	TZM307	2CPX010608R9999	TZM307A	2CPX010759R9999
		4	TZM407	2CPX010615R9999	TZM407A	2CPX010765R9999
		5	TZM507	2CPX010622R9999	TZM507A	2CPX010771R9999
8	4	1	TZM108	2CPX010595R9999	TZM108A	2CPX010748R9999
		2	TZM208	2CPX010602R9999	TZM208A	2CPX010754R9999
		3	TZM308	2CPX010609R9999	TZM308A	2CPX010760R9999
		4	TZM408	2CPX010616R9999	TZM408A	2CPX010766R9999
		5	TZM508	2CPX010623R9999	TZM508A	2CPX010772R9999
9	5	1	TZM109	2CPX010596R9999	TZM109A	2CPX010749R9999
		2	TZM209	2CPX010603R9999	TZM209A	2CPX010755R9999
		3	TZM309	2CPX010610R9999	TZM309A	2CPX010761R9999
		4	TZM409	2CPX010617R9999	TZM409A	2CPX010767R9999
		5	TZM509	2CPX010624R9999	TZM509A	2CPX010773R9999
12	8	1	TZM112	2CPX010940R9999	TZM112A	2CPX010944R9999
		2	TZM212	2CPX010941R9999	TZM212A	2CPX010945R9999
		3	TZM312	2CPX010942R9999	TZM312A	2CPX010946R9999
		4	TZM412	2CPX010943R9999	TZM412A	2CPX010947R9999
		5*	TZM212	2CPX010941R9999	TZM212A	2CPX010945R9999
			TZM312	2CPX010942R9999	TZM312A	2CPX010946R9999
		6*	TZM312	2CPX010942R9999	TZM312A	2CPX010946R9999
			TZM312	2CPX010942R9999	TZM312A	2CPX010946R9999

* In a cabinet with field width 5 and above, two separate mounting plates

*[1] Mounting plate installed at the factory, only in conjunction with empty cabinet

Wall and floor-standing cabinets TwinLine N

Dimensions, weights, power dissipation

TwinLine-H, cabinet depth 225mm, ⏚ ⧈

Front view

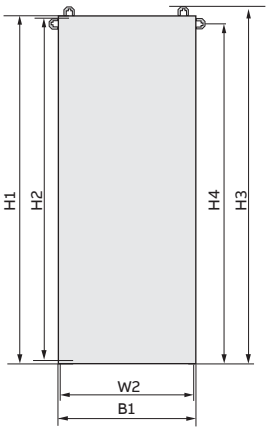

Front view



Detailed view



Side view



Top view



Height		Width		⏚/⧈ External dimensions in mm		⏚/⧈ Internal dimensions in mm		⏚/⧈ Wall mounting dimensions in mm			
GU	OH	PW	Type	H1	B1	H2	W2	H3	W3	H4	W4
TwinLine H standing cabinets											
12	8	1	TH112	1850	300	1802	252	1872	328	1796	192
		2	TH212	1850	550	1802	502	1872	578	1796	442
		3	TH312	1850	800	1802	752	1872	828	1796	692
		4	TH412	1850	1050	1802	1002	1872	1078	1796	942
		5	TH512	1850	1300	1802	1252	1872	1328	1796	1192

Height		Width		⏚/⧈ Power dissipation in watts* at overtemperature △t	⏚ Cabinet weight	⧈ Cabinet weight	⏚/⧈ Max. installation weight
GU	OH	PW	Type	20K	With door in kg	With door in kg	in kg
TwinLine H standing cabinets							
12	8	1	TH112	64.00	25,66	27,33	45
		2	TH212	113.00	42,55	44,87	90
		3	TH312	162.60	53,99	56,96	135
		4	TH412	202.10	67,81	71,54	180
		5	TH512	230.80	75,82	80,21	225

* General remarks on the determination of the power dissipation: Values in accordance with DIN EN 61439-1 section 10.10.4.2.2; ambient temperature 35 °C, internal temperature 55 ° C, it must be guaranteed that the permissible operating medium temperature is not exceeded; height of the installation location ≤ 2000 m above sea level; shape of inner divider = 1; side walls not covered

Wall and floor-standing cabinets TwinLine N

Dimensions TwinLine-G, cabinet depth 225 mm, ⏚▣

Front view
Wall cabinet and standing cabinet
External dimensions/
internal dimensions

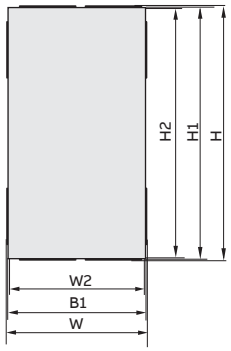

Front view
Wall cabinet
Dimensions wall mounting



Front view
Standalone cabinet
Dimensions wall mounting

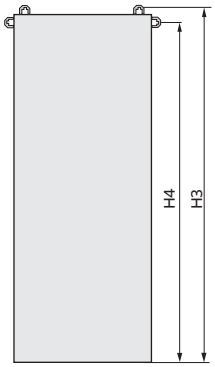

Front view
External mounting
Detail



Side view
With/without door



Height		Width		External dimensions		Internal dimensions		External dimensions with flange knock-out		Dimensions wall mounting			
GU	OH	PW	Type	H1	B1	H2	W2	H	W	H3	W3	H4	W4
Twin Line-G cabinets ⏚▣													
4	0	1	TG104	650	300	602	252	654	304	693.5	328	542	192
		2	TG204	650	550	602	502	654	554	693.5	578	542	442
		3	TG304	650	800	602	752	654	804	693.5	828	542	692
		4	TG404	650	1050	602	1002	654	1054	693.5	1078	542	942
		5	TG504	650	1300	602	1252	654	1304	693.5	1328	542	1192
5	1	1	TG105	800	300	752	252	804	304	843.5	328	692	192
		2	TG205	800	550	752	502	804	554	843.5	578	692	442
		3	TG305	800	800	752	752	804	804	843.5	828	692	692
		4	TG405	800	1050	752	1002	804	1054	843.5	1078	692	942
		5	TG505	800	1300	752	1252	804	1304	843.5	1328	692	1192
6	2	1	TG106	950	300	902	252	954	304	993.5	328	842	192
		2	TG206	950	550	902	502	954	554	993.5	578	842	442
		3	TG306	950	800	902	752	954	804	993.5	828	842	692
		4	TG406	950	1050	902	1002	954	1054	993.5	1078	842	942
		5	TG506	950	1300	902	1252	954	1304	993.5	1328	842	1192
7	3	1	TG107	1100	300	1052	252	1104	304	1143.5	328	992	192
		2	TG207	1100	550	1052	502	1104	554	1143.5	578	992	442
		3	TG307	1100	800	1052	752	1104	804	1143.5	828	992	692
		4	TG407	1100	1050	1052	1002	1104	1054	1143.5	1078	992	942
		5	TG507	1100	1300	1052	1252	1104	1304	1143.5	1328	992	1192
8	4	1	TG108	1250	300	1202	252	1254	304	1293.5	328	1142	192
		2	TG208	1250	550	1202	502	1254	554	1293.5	578	1142	442
		3	TG308	1250	800	1202	752	1254	804	1293.5	828	1142	692
		4	TG408	1250	1050	1202	1002	1254	1054	1293.5	1078	1142	942
		5	TG508	1250	1300	1202	1252	1254	1304	1293.5	1328	1142	1192
9	5	1	TG109	1400	300	1352	252	1404	304	1443.5	328	1292	192
		2	TG209	1400	550	1352	502	1404	554	1443.5	578	1292	442
		3	TG309	1400	800	1352	752	1404	804	1443.5	828	1292	692
		4	TG409	1400	1050	1352	1002	1404	1054	1443.5	1078	1292	942
		5	TG509	1400	1300	1352	1252	1404	1304	1443.5	1328	1292	1192
Twin Line-G standing cabinets ⏚▣													
12	8	1	TG112	1850	300	1802	252	1854	304	1872	328	1796	192
		2	TG212	1850	550	1802	502	1854	554	1872	578	1796	442
		3	TG312	1850	800	1802	752	1854	804	1872	828	1796	692
		4	TG412	1850	1050	1802	1002	1854	1054	1872	1078	1796	942
		5	TG512	1850	1300	1802	1252	1854	1304	1872	1328	1796	1192

> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

Weights power loss TwinLine-G, cabinet depth 225 mm, ⏚▣

Type of installation
Cabinet on the wall

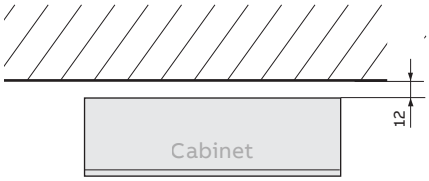

Type of installation
Cabinet combination
side by side



Type of installation
Cabinet combination
one on top of the other



Height		Width		⏚/▣ Power dissipation in watts* at overtemperature △t 20K	⏚ Cabinet weight in kg		▣ Cabinet weight in kg		Max. installation weight
GU	OH	PW	Type		With door	Without door	With door	Without door	in kg
Twin Line-G cabinets ⏚▣									
4	0	1	TG104	35.80	11,39	7,42	12,89	8,92	15.00
		2	TG204	57.00	16,15	9,94	17,79	11,59	30.00
		3	TG304	61.00	21,01	12,46	22,79	14,25	45.00
		4	TG404	82.30	28,02	15,54	29,94	17,46	60.00
		5	TG504	107.80	32,85	18,06	34,92	20,13	75.00
5	1	1	TG105	42.30	13,16	8,39	14,85	10,09	20.50
		2	TG205	66.10	18,71	11,21	20,59	13,10	41.00
		3	TG305	71.00	24,28	14,03	26,36	16,11	61.50
		4	TG405	99.00	32,44	17,39	34,71	19,66	82.50
		5	TG505	131.20	38,02	20,21	40,48	22,67	103.00
6	2	1	TG106	48.80	14,88	9,36	16,77	11,25	26.00
		2	TG206	52.60	21,22	12,43	23,35	14,60	52.50
		3	TG306	80.90	27,54	15,58	29,91	17,95	78.50
		4	TG406	115.10	36,84	19,24	39,45	21,85	105.00
		5	TG506	153.70	43,17	22,35	46,02	25,09	131.00
7	3	1	TG107	55.40	17,13	10,71	19,21	12,80	31.50
		2	TG207	61.40	24,34	14,24	26,72	16,62	63.50
		3	TG307	93.50	31,54	17,78	34,21	20,44	95.50
		4	TG407	133.70	42,22	21,86	45,18	24,82	127.50
		5	TG507	174.30	49,43	25,40	52,67	28,64	159.00
8	4	1	TG108	61.80	18,89	11,68	21,18	13,96	37.50
		2	TG208	69.30	26,86	15,51	29,48	18,13	75.00
		3	TG308	102.90	34,81	19,33	37,77	22,29	112.50
		4	TG408	150.30	46,63	23,71	49,99	27,08	150.00
		5	TG508	193.30	54,58	27,54	58,29	31,25	187.50
9	5	1	TG109	68.20	20,65	12,64	23,13	15,12	43.00
		2	TG209	79.10	29,37	16,77	32,20	19,63	86.00
		3	TG309	119.30	38,07	20,89	41,33	24,14	129.00
		4	TG409	157.50	51,03	25,56	54,75	29,29	172.50
		5	TG509	208.80	59,73	29,69	63,84	33,80	215.50
TwinLine-G standing cabinets ⏚▣									
12	8	1	TG112	64.00	26,16	15,77	28,83	18,45	60.00
		2	TG212	113.00	40,22	23,84	43,68	27,29	120.00
		3	TG312	162.60	51,87	29,57	56,11	33,81	180.00
		4	TG412	202.10	68,04	36,30	73,17	41,43	240.00
		5	TG512	230.80	78,83	41,14	84,74	47,05	300.00

* General remarks on the determination of the power dissipation: Values in accordance with DIN EN 61439-1 section 10.10.4.2.2; ambient temperature 35 °C, internal temperature 55 ° C, it must be guaranteed that the permissible operating medium temperature is not exceeded; height of the installation location ≤ 2000 m above sea level; shape of inner divider = 1; side walls not covered

Wall and floor-standing cabinets TwinLine N

Dimensions TwinLine-L, cabinet depth 275 mm, ⏚▣

Front view
Wall cabinet and standing cabinet
External dimensions/
internal dimensions

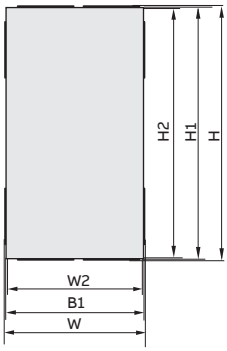

Front view
Wall cabinet
Dimensions wall mounting



Front view
Standalone cabinet
Dimensions wall mounting

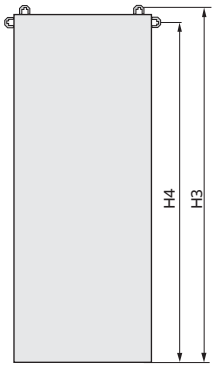

Front view
External mounting
Detail



Side view
With/without door



Height		Width		External dimensions		Internal dimensions		External dimensions with flange knock-out		Dimensions wall mounting			
GU	**OH**	**PW**	**Type**	**H1**	**B1**	**H2**	**W2**	**H**	**W**	**H3**	**W3**	**H4**	**W4**
TwinLine-L wall cabinets ⏚▣													
4	0	1	TL104	650	300	602	252	654	304	693.5	328	542	192
		2	TL204	650	550	602	502	654	554	693.5	578	542	442
		3	TL304	650	800	602	752	654	804	693.5	828	542	692
		4	TL404	650	1050	602	1002	654	1054	693.5	1078	542	942
		5	TL504	650	1300	602	1252	654	1304	693.5	1328	542	1192
5	1	1	TL105	800	300	752	252	804	304	843.5	328	692	192
		2	TL205	800	550	752	502	804	554	843.5	578	692	442
		3	TL305	800	800	752	752	804	804	843.5	828	692	692
		4	TL405	800	1050	752	1002	804	1054	843.5	1078	692	942
		5	TL505	800	1300	752	1252	804	1304	843.5	1328	692	1192
6	2	1	TL106	950	300	902	252	954	304	993.5	328	842	192
		2	TL206	950	550	902	502	954	554	993.5	578	842	442
		3	TL306	950	800	902	752	954	804	993.5	828	842	692
		4	TL406	950	1050	902	1002	954	1054	993.5	1078	842	942
		5	TL506	950	1300	902	1252	954	1304	993.5	1328	842	1192
7	3	1	TL107	1100	300	1052	252	1104	304	1143.5	328	992	192
		2	TL207	1100	550	1052	502	1104	554	1143.5	578	992	442
		3	TL307	1100	800	1052	752	1104	804	1143.5	828	992	692
		4	TL407	1100	1050	1052	1002	1104	1054	1143.5	1078	992	942
		5	TL507	1100	1300	1052	1252	1104	1304	1143.5	1328	992	1192
8	4	1	TL108	1250	300	1202	252	1254	304	1293.5	328	1142	192
		2	TL208	1250	550	1202	502	1254	554	1293.5	578	1142	442
		3	TL308	1250	800	1202	752	1254	804	1293.5	828	1142	692
		4	TL408	1250	1050	1202	1002	1254	1054	1293.5	1078	1142	942
		5	TL508	1250	1300	1202	1252	1254	1304	1293.5	1328	1142	1192
9	5	1	TL109	1400	300	1352	252	1404	304	1443.5	328	1292	192
		2	TL209	1400	550	1352	502	1404	554	1443.5	578	1292	442
		3	TL309	1400	800	1352	752	1404	804	1443.5	828	1292	692
		4	TL409	1400	1050	1352	1002	1404	1054	1443.5	1078	1292	942
		5	TL509	1400	1300	1352	1252	1404	1304	1443.5	1328	1292	1192
TwinLine-L standing cabinets ⏚▣													
12	8	1	TL112	1850	300	1802	252	1854	304	1872	328	1796	192
		2	TL212	1850	550	1802	502	1854	554	1872	578	1796	442
		3	TL312	1850	800	1802	752	1854	804	1872	828	1796	692
		4	TL412	1850	1050	1802	1002	1854	1054	1872	1078	1796	942
		5	TL512	1850	1300	1802	1252	1854	1304	1872	1328	1796	1192

> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

Weights and power dissipation TwinLine-L, cabinet depth 275 mm, ⏚▣

Type of installation
Cabinet on the wall

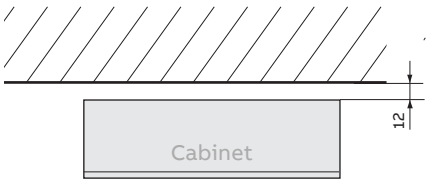

Type of installation
Cabinet combination
side by side



Type of installation
Cabinet combination
one on top of the other



Height		Width		⏚/▣ Power dissipation in watts* at overtemperature △t 20K	⏚ Cabinet weight in kg		▣ Cabinet weight in kg		Max. installation weight
GU	OH	PW	Type		With door	Without door	With door	Without door	in kg
TwinLine-L wall cabinets ⏚▣									
4	0	1	TL104	38.80	12,24	8,27	13,80	9,83	15.00
		2	TL204	60.80	17,22	10,96	18,93	12,72	30.00
		3	TL304	67.10	22,28	13,74	24,16	15,62	45.00
		4	TL404	89.70	29,53	17,05	31,54	19,08	60.00
		5	TL504	116.80	34,57	19,78	36,76	21,97	75.00
5	1	1	TL105	45.80	14,13	9,36	15,89	11,13	20.50
		2	TL205	70.20	19,89	12,39	21,86	14,36	41.00
		3	TL305	78.00	25,67	15,42	27,85	17,60	61.50
		4	TL405	108.90	34,07	19,02	36,45	21,37	82.50
		5	TL505	145.10	39,86	22,05	42,45	24,64	103.00
6	2	1	TL106	52.80	15,96	10,44	17,94	12,35	26.00
		2	TL206	59.90	22,51	13,77	24,74	15,99	52.50
		3	TL306	89.80	29,05	17,09	31,53	19,57	78.50
		4	TL406	128.10	38,58	20,99	41,32	23,73	105.00
		5	TL506	168.00	45,12	24,31	48,08	27,27	131.00
7	3	1	TL107	59.80	18,33	11,88	20,50	14,09	31.50
		2	TL207	65.20	25,76	15,66	28,24	18,14	63.50
		3	TL307	102.80	33,17	19,41	35,96	22,19	95.50
		4	TL407	145.70	44,09	23,73	47,17	27,13	127.50
		5	TL507	189.20	51,50	27,48	54,89	30,87	159.00
8	4	1	TL108	66.70	20,21	13,00	22,59	15,38	37.50
		2	TL208	74.40	28,39	17,04	31,12	19,77	75.00
		3	TL308	117.80	36,56	21,08	39,65	24,17	112.50
		4	TL408	163.70	48,61	25,70	52,12	29,20	150.00
		5	TL508	207.70	56,78	29,74	60,64	33,60	187.50
9	5	1	TL109	52.20	22,38	14,08	24,67	16,66	43.00
		2	TL209	86.00	31,02	18,42	34,00	21,40	86.00
		3	TL309	126.00	39,94	22,75	43,33	26,14	129.00
		4	TL409	179.10	53,13	27,67	57,00	31,54	172.50
		5	TL509	222.10	62,04	32,00	66,32	36,28	215.50
TwinLine-L standing cabinets ⏚▣									
12	8	1	TL112	69.60	27,95	17,56	30,78	20,39	60.00
		2	TL212	120.90	42,23	25,84	45,86	29,47	120.00
		3	TL312	171.90	54,09	31,79	58,52	36,22	180.00
		4	TL412	207.00	70,50	38,76	75,83	44,09	240.00
		5	TL512	250.30	82,10	44,40	88,23	50,53	300.00

* General remarks on the determination of the power dissipation: Values in accordance with DIN EN 61439-1 section 10.10.4.2.2; ambient temperature 35 °C, internal temperature 55 °C, it must be guaranteed that the permissible operating medium temperature is not exceeded; height of the installation location ≤ 2000 m above sea level; shape of inner divider = 1; side walls not covered

Wall and floor-standing cabinets TwinLine N

Dimensions TwinLine-W, cabinet depth 350 mm, ⏚▣

Front view
Wall cabinet and standing cabinet
External dimensions/
internal dimensions



Front view
Wall cabinet
Dimensions wall mounting



Front view
Standalone cabinet
Dimensions wall mounting

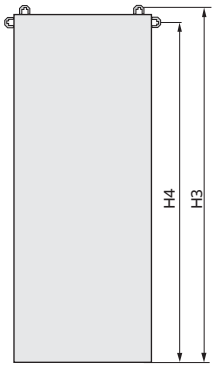

Front view
External mounting
Detail



Side view
With/without door

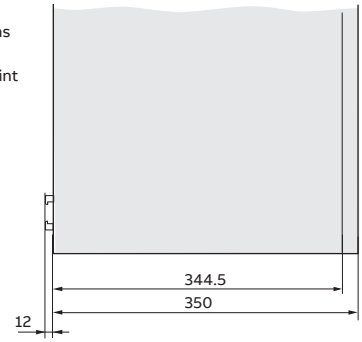

Height		Width		External dimensions		Internal dimensions		External dimensions with flange knock-out		Dimensions wall mounting			
GU	OH	PW	Type	H1	B1	H2	W2	H	W	H3	W3	H4	W4
TwinLine-W wall cabinets ⏚▣													
4	0	1	TW104	650	300	602	252	654	304	693.5	328	542	192
		2	TW204	650	550	602	502	654	554	693.5	578	542	442
		3	TW304	650	800	602	752	654	804	693.5	828	542	692
		4	TW404	650	1050	602	1002	654	1054	693.5	1078	542	942
		5	TW504	650	1300	602	1252	654	1304	693.5	1328	542	1192
5	1	1	TW105	800	300	752	252	804	304	843.5	328	692	192
		2	TW205	800	550	752	502	804	554	843.5	578	692	442
		3	TW305	800	800	752	752	804	804	843.5	828	692	692
		4	TW405	800	1050	752	1002	804	1054	843.5	1078	692	942
		5	TW505	800	1300	752	1252	804	1304	843.5	1328	692	1192
6	2	1	TW106	950	300	902	252	954	304	993.5	328	842	192
		2	TW206	950	550	902	502	954	554	993.5	578	842	442
		3	TW306	950	800	902	752	954	804	993.5	828	842	692
		4	TW406	950	1050	902	1002	954	1054	993.5	1078	842	942
		5	TW506	950	1300	902	1252	954	1304	993.5	1328	842	1192
7	3	1	TW107	1100	300	1052	252	1104	304	1143.5	328	992	192
		2	TW207	1100	550	1052	502	1104	554	1143.5	578	992	442
		3	TW307	1100	800	1052	752	1104	804	1143.5	828	992	692
		4	TW407	1100	1050	1052	1002	1104	1054	1143.5	1078	992	942
		5	TW507	1100	1300	1052	1252	1104	1304	1143.5	1328	992	1192
8	4	1	TW108	1250	300	1202	252	1254	304	1293.5	328	1142	192
		2	TW208	1250	550	1202	502	1254	554	1293.5	578	1142	442
		3	TW308	1250	800	1202	752	1254	804	1293.5	828	1142	692
		4	TW408	1250	1050	1202	1002	1254	1054	1293.5	1078	1142	942
		5	TW508	1250	1300	1202	1252	1254	1304	1293.5	1328	1142	1192
9	5	1	TW109	1400	300	1352	252	1404	304	1443.5	328	1292	192
		2	TW209	1400	550	1352	502	1404	554	1443.5	578	1292	442
		3	TW309	1400	800	1352	752	1404	804	1443.5	828	1292	692
		4	TW409	1400	1050	1352	1002	1404	1054	1443.5	1078	1292	942
		5	TW509	1400	1300	1352	1252	1404	1304	1443.5	1328	1292	1192
TwinLine-W standing cabinets ⏚▣													
12	8	1	TW112	1850	300	1802	252	1854	304	1872	328	1796	192
		2	TW212	1850	550	1802	502	1854	554	1872	578	1796	442
		3	TW312	1850	800	1802	752	1854	804	1872	828	1796	692
		4	TW412	1850	1050	1802	1002	1854	1054	1872	1078	1796	942
		5	TW512	1850	1300	1802	1252	1854	1304	1872	1328	1796	1192
		6	TW612	1850	1550	1802	1502	1854	1554	1872	1578	1796	1442

> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

Weights and power dissipation TwinLine-W, cabinet depth 350 mm, ⏚▣

Type of installation
Cabinet on the wall

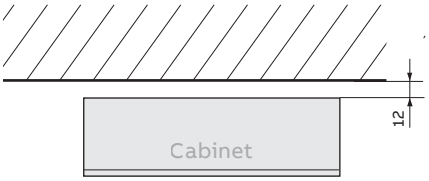

Type of installation
Cabinet combination
side by side



Type of installation
Cabinet combination
one on top of the other



Height		Width		⏚/▣ Power dissipation in watts* at overtemperature △t 20K	⏚ Cabinet weight in kg		▣ Cabinet weight in kg		Max. installation weight
GU	OH	PW	Type		With door	Without door	With door	Without door	in kg
TwinLine-W wall cabinets ⏚▣									
4	0	1	TW104	43.00	13,49	9,46	15,13	11,16	15.00
		2	TW204	65.90	18,78	12,57	20,60	14,39	30.00
		3	TW304	75.90	24,16	15,62	26,15	17,61	45.00
		4	TW404	100.10	31,75	19,27	33,92	21,44	60.00
		5	TW504	129.30	37,10	22,31	39,45	24,67	75.00
5	1	1	TW105	50.50	17,57	10,79	19,64	12,64	20.50
		2	TW205	59.80	24,43	14,13	26,78	16,21	41.00
		3	TW305	87.70	31,28	17,47	33,90	19,78	61.50
		4	TW405	121.30	41,15	21,42	44,05	23,95	82.50
		5	TW505	158.90	48,01	24,76	51,18	27,52	103.00
6	2	1	TW106	58.20	20,11	12,05	22,40	14,12	26.00
		2	TW206	68.20	27,85	15,69	30,47	18,03	52.50
		3	TW306	102.80	35,58	19,32	38,52	21,95	78.50
		4	TW406	144.80	46,84	23,56	50,10	26,46	105.00
		5	TW506	185.80	54,57	27,20	58,15	30,07	131.00
7	3	1	TW107	65.80	22,17	13,69	24,80	15,98	31.50
		2	TW207	75.70	30,66	17,75	33,54	20,37	63.50
		3	TW307	116.50	39,14	21,81	42,40	24,75	95.50
		4	TW407	163.60	51,54	26,48	55,23	29,74	127.50
		5	TW507	209.30	60,02	30,54	64,08	34,12	159.00
8	4	1	TW108	52.00	24,22	14,95	26,95	17,46	37.50
		2	TW208	82.70	33,47	19,31	36,61	22,19	75.00
		3	TW308	132.60	42,70	23,66	46,27	26,92	112.50
		4	TW408	180.80	56,23	28,62	60,30	32,31	150.00
		5	TW508	227.50	65,46	32,98	69,96	37,04	187.50
9	5	1	TW109	58.60	15,55	16,21	17,41	18,94	43.00
		2	TW209	93.90	21,63	20,86	23,71	24,01	86.00
		3	TW309	146.40	27,72	25,51	30,03	29,08	129.00
		4	TW409	197.10	36,46	30,76	39,00	34,84	172.50
		5	TW509	238.20	42,57	35,41	45,33	39,91	215.50
TwinLine-W standing cabinets ⏚▣									
12	8	1	TW112	78.90	30,62	20,23	33,66	23,27	60.00
		2	TW212	131.70	45,07	28,69	48,94	32,55	120.00
		3	TW312	181.50	57,35	35,05	62,04	39,73	180.00
		4	TW412	226.00	73,90	42,15	79,50	47,76	240.00
		5	TW512	269.40	85,81	48,12	92,24	54,54	300.00
		6	TW612	354.50	97,63	53,98	104,87	61,22	360.00

* General remarks on the determination of the power dissipation: Values in accordance with DIN EN 61439-1 section 10.10.4.2.2; ambient temperature 35 °C, internal temperature 55 °C, it must be guaranteed that the permissible operating medium temperature is not exceeded; height of the installation location ≤ 2000 m above sea level; shape of inner divider = 1; side walls not covered

Wall and floor-standing cabinets TwinLine N

Dimensions TwinLine-X, cabinet depth 400 mm, ⏚⧈

Top view
standing cabinet
External dimensions/
internal dimensions

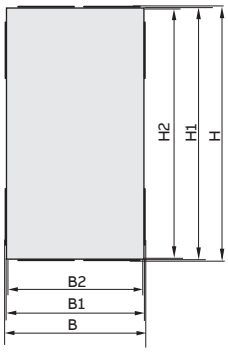

Front view
Standalone cabinet
Dimensions wall mounting

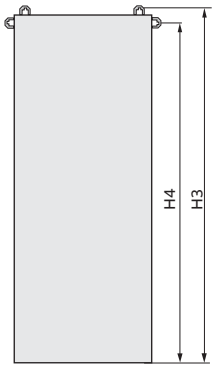

Front view
External mounting
Detail



Side view
With/without door



Height		Width		External dimensions		Internal dimensions		External dimensions*		Dimensions wall mounting		Depth	
GU	OH	PW	Type	H1	B1	H2	B2	H	B	H3	H4	T1	T2
TwinLine-X floor-standing cabinets ⏚⧈													
12	8	2	TX212	1850	550	1802	502	1854	564	1872	1796	400	394.5
		3	TX312	1850	800	1802	752	1854	814	1872	1796	400	394.5
		4	TX412	1850	1050	1802	1002	1854	1064	1872	1796	400	394.5

* incl. flange knockouts and side walls

> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

Weights and power dissipation TwinLine-X, cabinet depth 400 mm, ⏚⧈

Type of installation
Cabinet on the wall

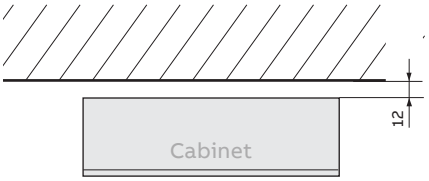

Type of installation
Cabinet combination
side by side



Height		Width		Power dissipation in watts* at overtemperature △t 20K	⏚ Cabinet weight in kg		⧈ Cabinet weight in kg		Max. installation weight
GU	OH	PW	Type		With door	Without door	With door	Without door	in kg
TwinLine-X floor-standing cabinets ⏚⧈									
12	8	2	TX212	144.3	45,62	29,21	49,02	32,63	120.0
		3	TX312	192.1	57,93	35,62	62,20	40,41	180.0
		4	TX412	241.0	74,29	43,58	80,55	49,32	240.0

* General notes on determining the power loss: Ambient temperature 35 °C, internal temperature 55 °C, it must be ensured that the permissible equipment temperature is not exceeded; altitude of the installation site ≤ 2000 m above sea level; internal form of separation = 1; side panels not covered.

Notes

Wall and floor-standing cabinets TwinLine N

Installation of CombiLine N modules on EDF mounting frame in TwinLine-H

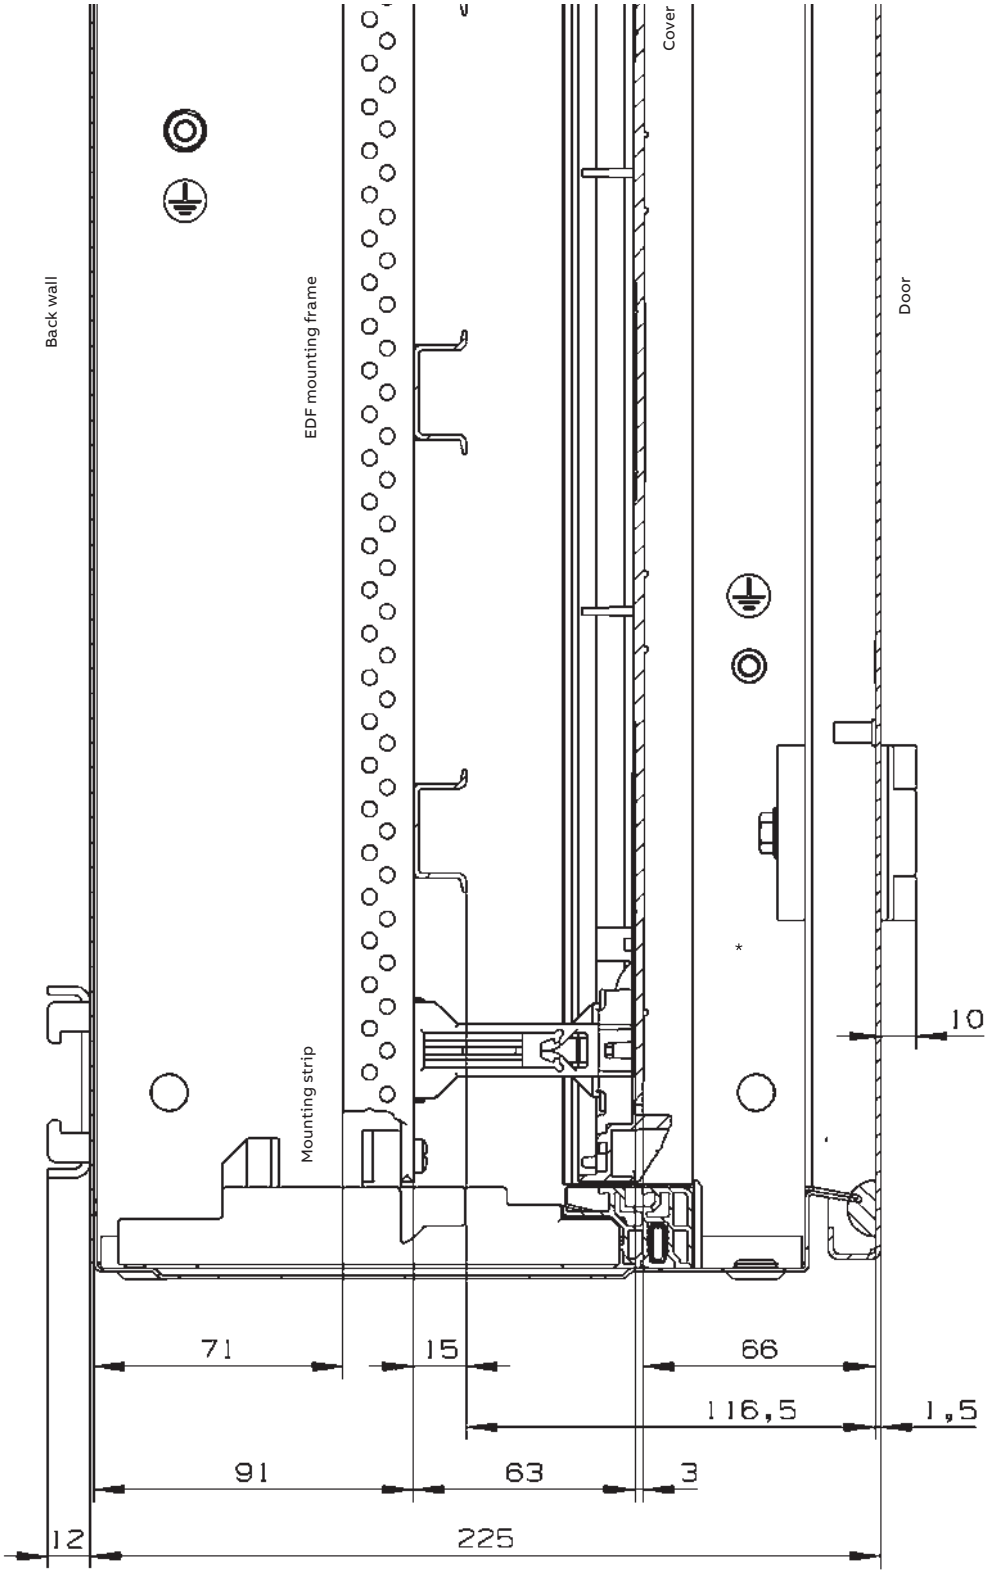

> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

Installation with meter field for TwinLine-H ⧈

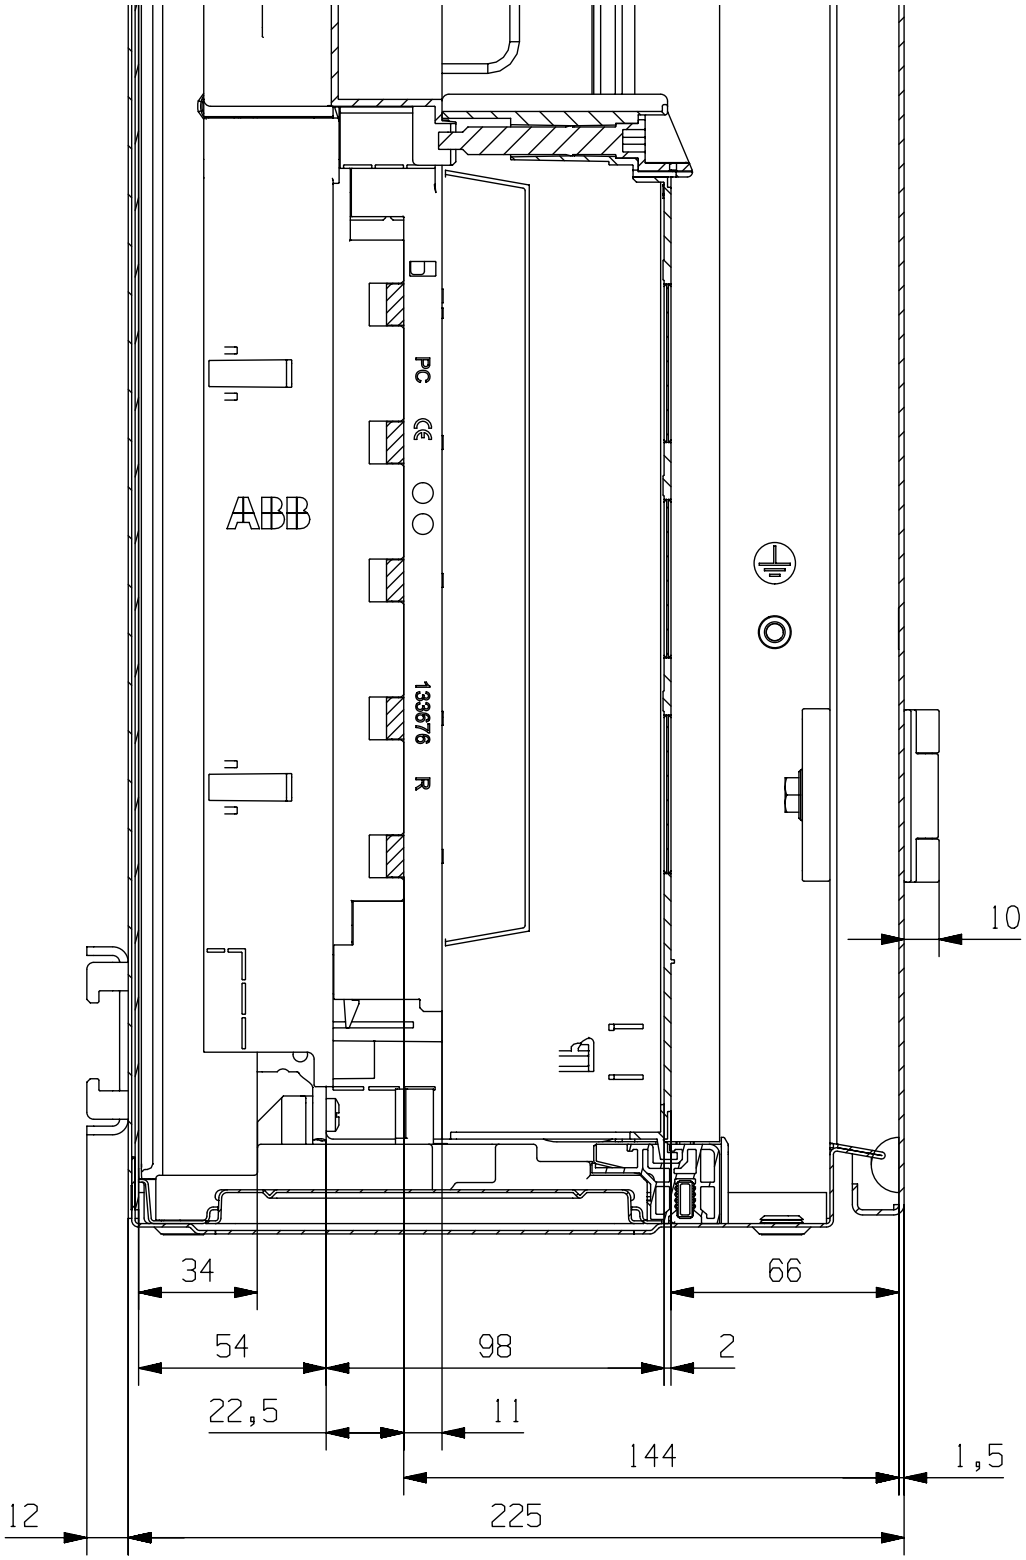

> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

Installation using mounting plate

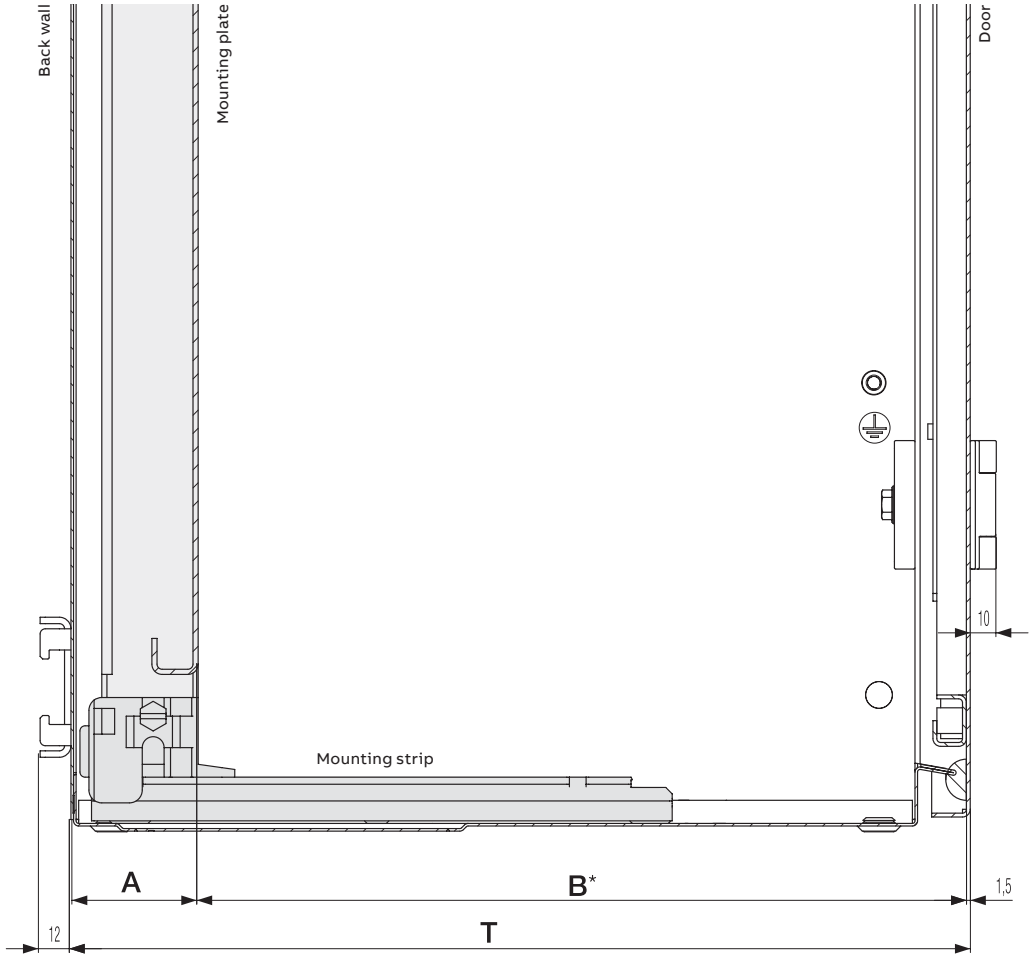

Mounting strip
Top view

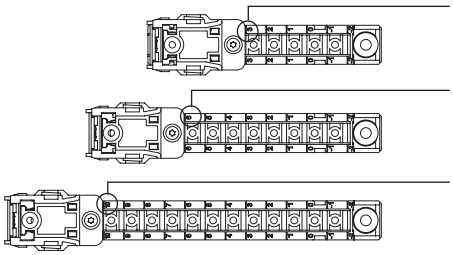

Mounting strip for Twin Line-G
Position 3/installation position

Mounting strip for Twin Line L
Position 6/installation position

Mounting strip for Twin Line-W
Position 10/installation position

Cabinet series	Depth	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	-1	-2
Dimension A at installation position																		
TwinLine-G	255					-	-	-	-	-	-	-	52,50	65,00	77,50	90,00	102,50	115,00
TwinLine-L	275					-	-	-	-	50,00	62,50	75,00	87,50	100,00	112,50	125,00	137,50	150,00
TwinLine-W	350					48,50	61,00	73,50	86,00	98,50	111,00	123,50	136,00	148,50	161,00	173,50	186,00	198,50
TwinLine-X	400	48.5	61,00	73.50	86,00	98.5	111,00	123.50	136,00	148.50	161,00	173.50	186,00	198.50	211,00	223.50	236,00	248.50
Dimension B at installation position*																		
TwinLine-G	255					-	-	-	-	-	-	-	177,00	157,50	145,00	132,50	120,00	107,50
TwinLine-L	275					-	-	-	-	222,50	210,00	197,50	185,00	172,50	160,00	147,50	135,00	122,50
TwinLine-W	350					299,00	286,50	274,00	261,50	249,00	236,50	224,00	211,50	199,00	186,50	174,00	161,50	149,00
TwinLine-X	400	349,00	336,50	324,00	311,50	299,00	286,50	274,00	261,50	249,00	236,50	224,00	211,50	199,00	186,50	174,00	161,50	149,00

* Related to the area of the installation space (see page 139); outside the installation space, this dimension is reduced by 35 mm due to door installation components
> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

CombiLine N modules on EDF mounting frame

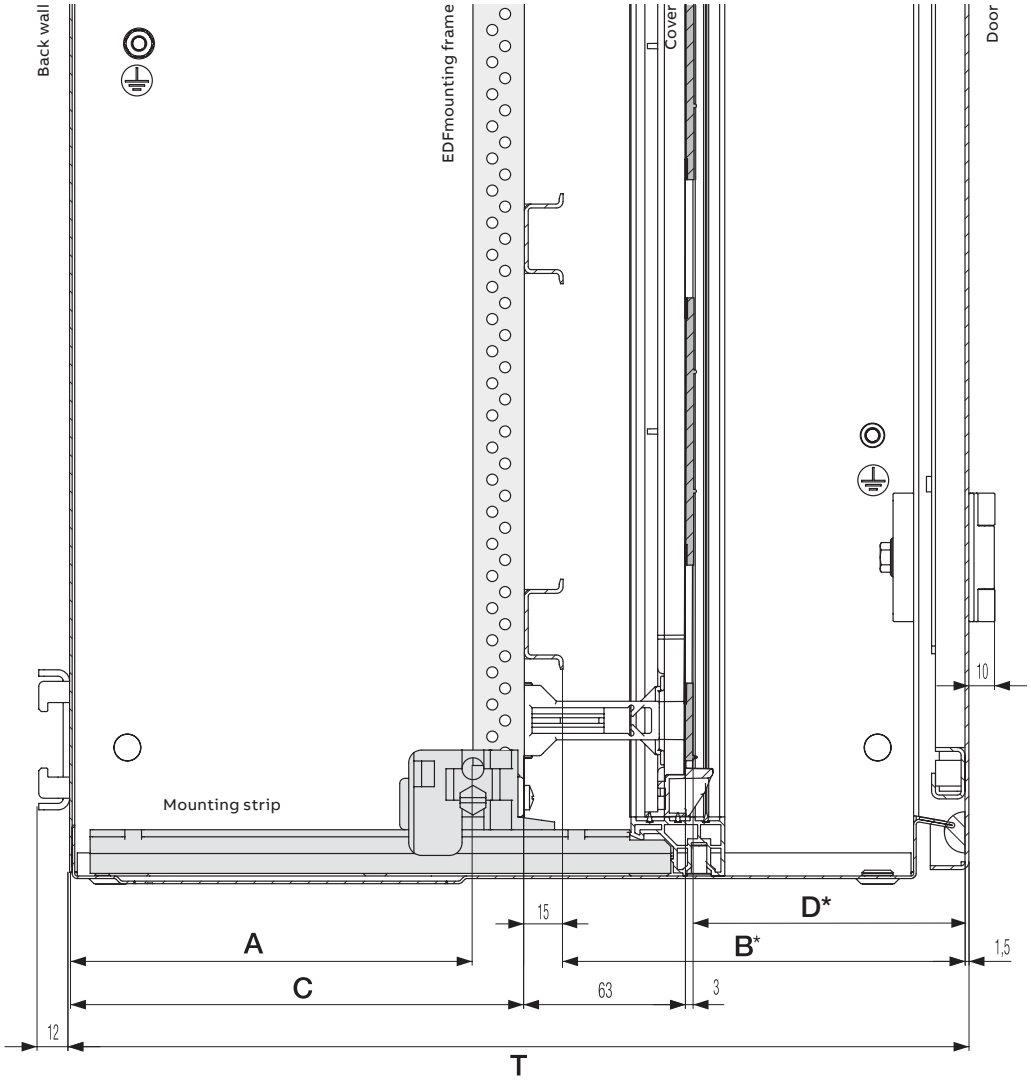

Mounting strip
Top view

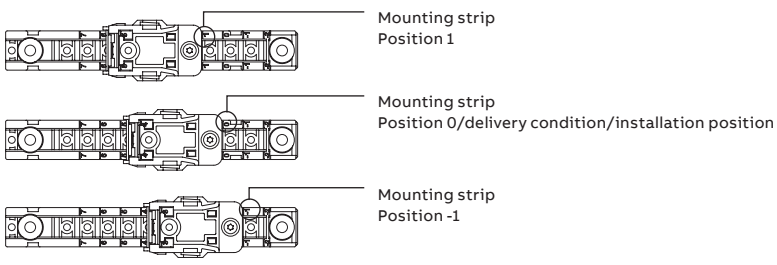

		Dimension A at installation position			Dimension B at installation position*			Dimension C at installation position			Dimension D at installation position*		
Cabinet series	**Depth**	**1**	**0**	**-1**	**1**	**0**	**-1**	**1**	**0**	**-1**	**1**	**0**	**-1**
TwinLine-G	225.00	60.00	72.50	85.00	127.50	115.00	102.50	80.00	92.50	105.00	76.50	64.00	51.50
TwinLine-L	275.00	95.00	107.50	120.00	142.50	130.00	117.50	115.00	127.50	140.00	91.50	79.00	66.50
TwinLine-W	350.00	143.50	156.00	168.50	169.00	156.50	144.00	163.50	176.00	188.50	117.50	105.00	92.50

* Related to the area of the installation space (see page 140); outside the installation space, this dimension is reduced by 35 mm due to door installation components
> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

CombiLine N modules on WR mounting frame

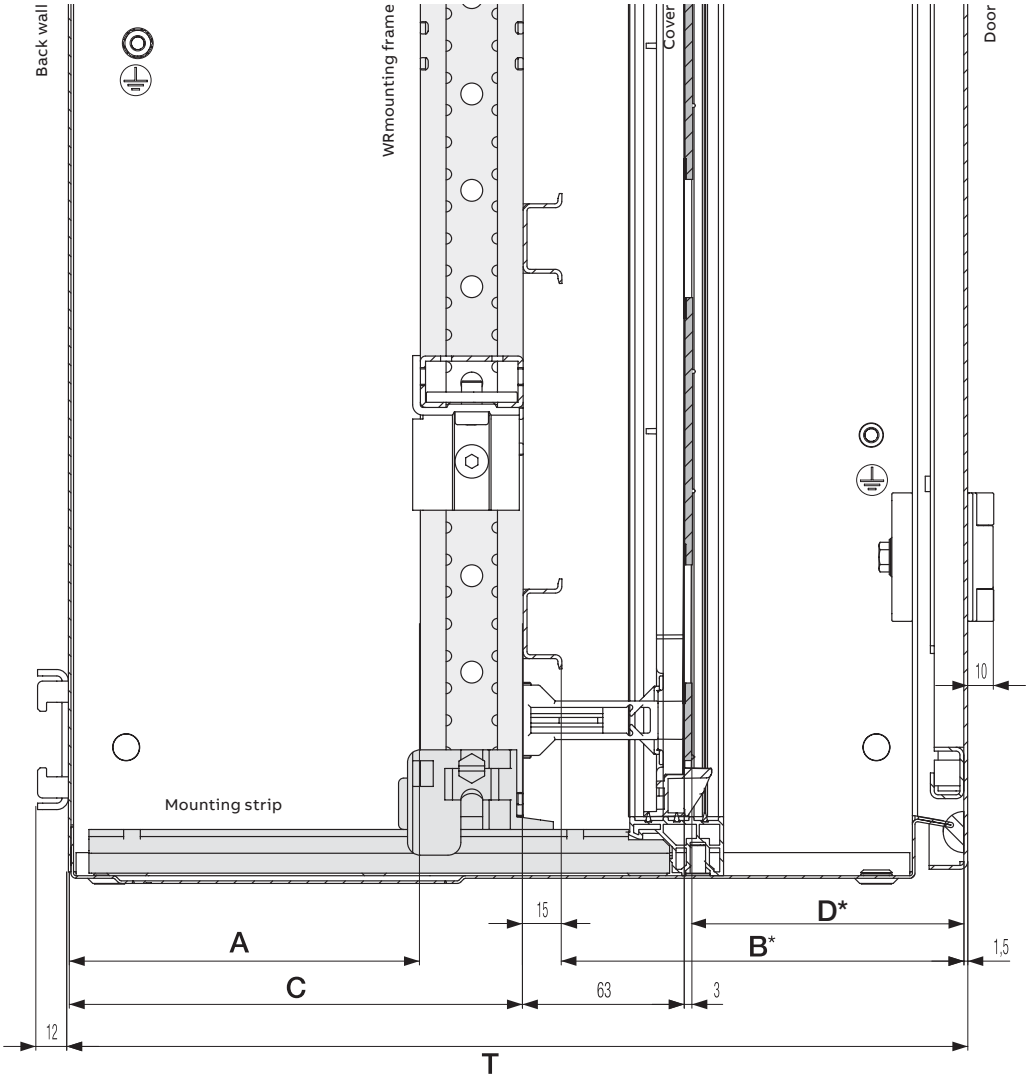

Mounting strip
Top view



		Dimension A at installation position*			Dimension B at installation position**			Dimension C at installation position*			Dimension D at installation position*		
Cabinet series	**Depth**	**1**	**0**	**-1**	**1**	**0**	**-1**	**1**	**0**	**-1**	**1**	**0**	**-1**
TwinLine-G	225,00	40,00	52,50	65,00	127,50	115,00	102,50	80,00	92,50	105,00	76,50	64,00	51,50
TwinLine-L	275,00	75,00	87,50	100,00	142,50	130,00	117,50	115,00	127,50	140,00	91,50	79,00	66,50
TwinLine-W	350,00	123,50	136,00	148,50	169,00	156,50	144,00	163,50	176,00	188,50	117,50	105,00	92,50
TwinLine-X	400,00	173,50	186,00	198,50	169,00	156,50	144,00	213,50	226,00	238,50	117,50	105,00	92,50

* Related to the area of the installation space; outside the installation space, this dimension is reduced by 35 mm due to door installation components
> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

Installation with EDF mounting frame on WR mounting frame

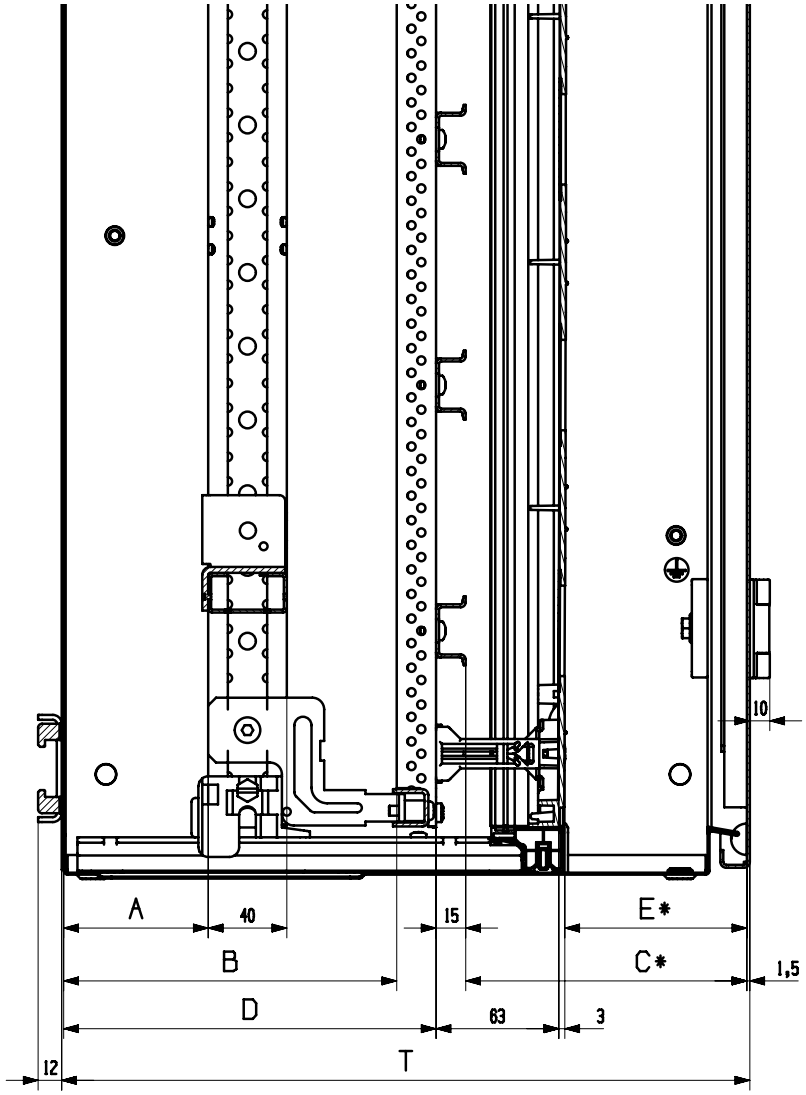

Mounting strip
Top view

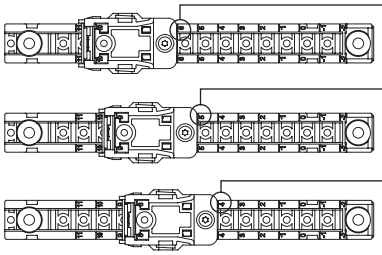

Mounting strip
Position 6

Mounting strip
Position 5/installation position

Mounting strip
Installation position 4

		Dimension A at installation position			Dimension B at installation position			Dimension C at installation position*			Dimension D at installation position			Dimension E at installation position*		
Cabinet series	**Depth**	**6**	**5**	**4**	**6**	**5**	**4**	**6**	**5**	**4**	**6**	**5**	**4**	**6**	**5**	**4**
TwinLine-L	275	12,5	25	37,5	108,5	121	133,5	129,5	117	104,5	128,5	141	153,5	78,5	66	53,5
TwinLine-W	350	61	73,5	86	157	169,5	182	155,5	143	130,5	177	189,5	202	104,5	92	79,5
TwinLine-X	400	111	123,5	136	207	219,5	232	155,5	143	130,5	227	239,5	252	104,5	92	79,5

* Related to the area of the installation space (see page 142); outside the installation space, this dimension is reduced by 35 mm due to door installation components
> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

Installation with meter field for TwinLine-G

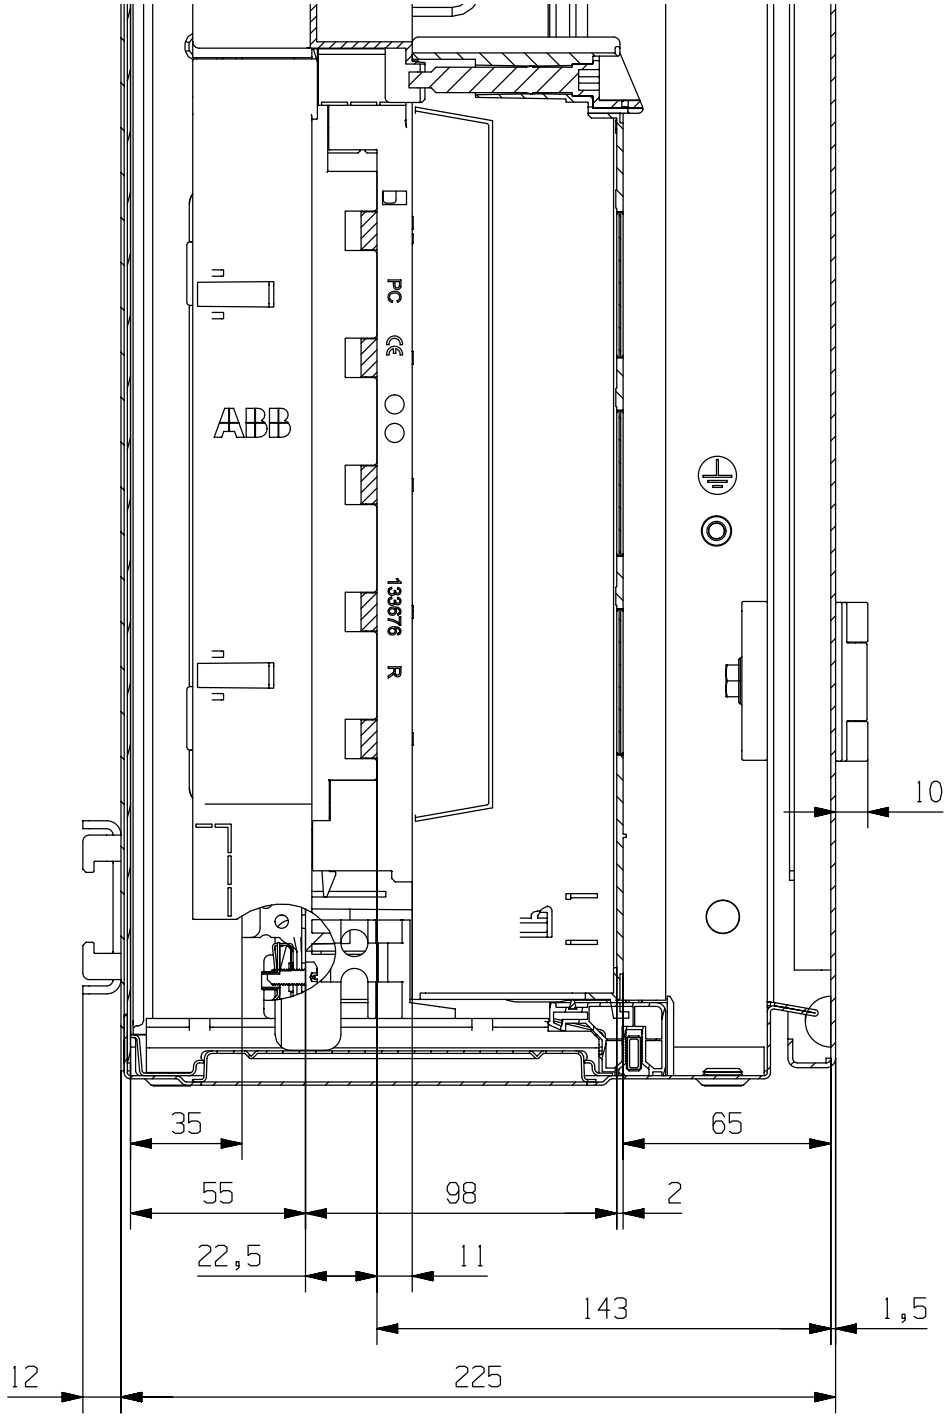

Mounting strip
Top view



Mounting strip
Position 0/installation position

* Related to the area of the installation space (see page 143); outside the installation space, this dimension is reduced by 35 mm due to door installation components
> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

TwinLine-X left sectional view with dimensions

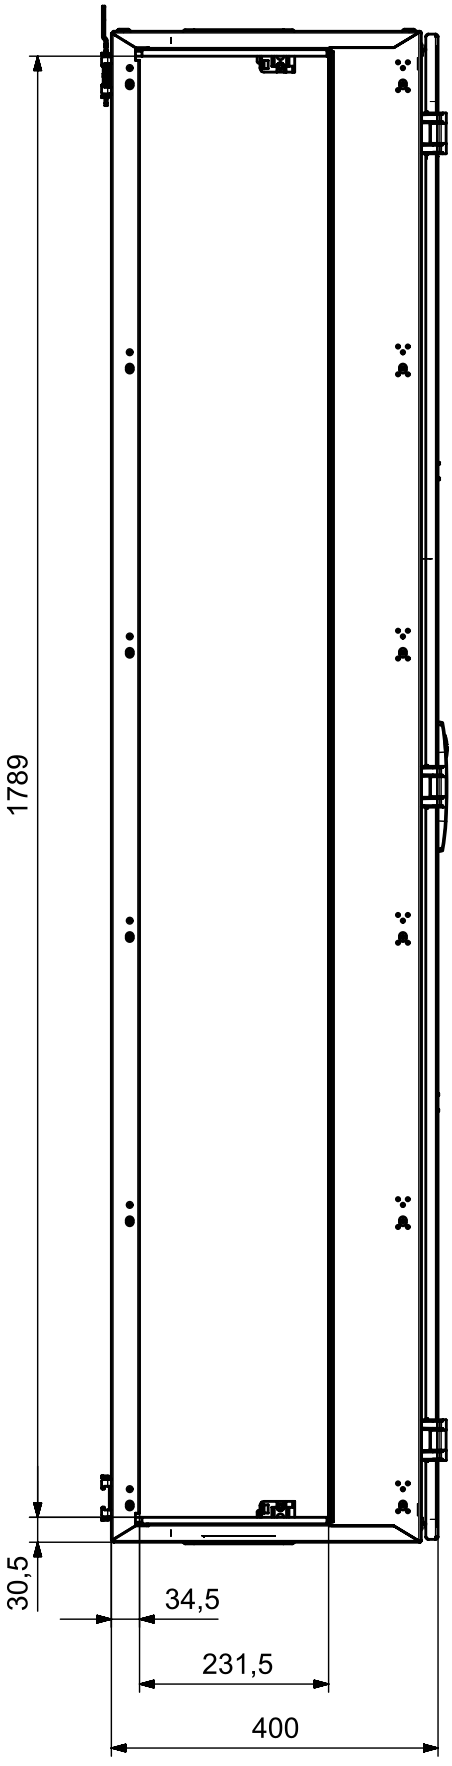

Wall and floor-standing cabinets TwinLine N

Top view of flange knock-out bottom and top

TH1...
TG1...
TL1...
TW1...



TH2...
TG2...
TL2...
TW2...

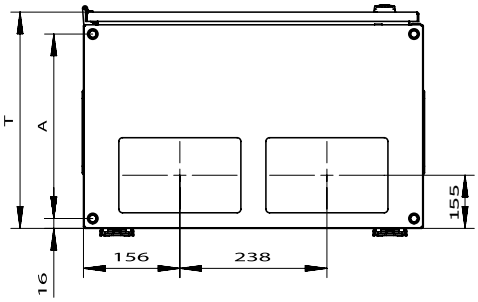

TH3...
TG3...
TL3...
TW3...

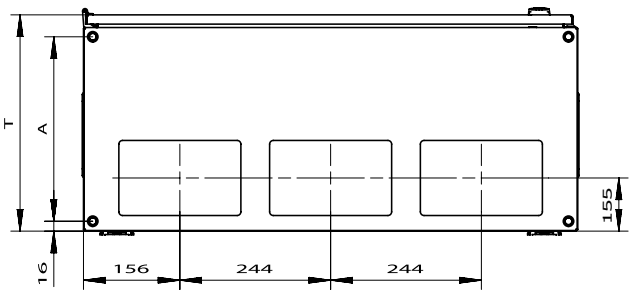

TH4...
TG4...
TL4...
TW4....

TH5...
TG5...
TL5...
TW5....
TW6...

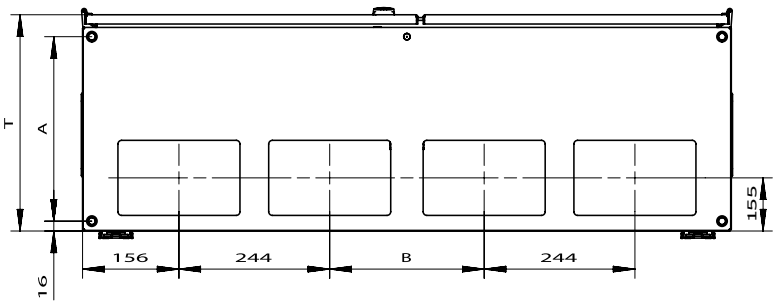

Cabinet series	Depth	A	B (field width 4)	B (field width 5)	B (field width 6)
TwinLine-G/-H	225.00	173.50	1 x 250 (250)	2 x 250 (500)	3 x 250 (750)
TwinLine-L	275.00	223.50			
TwinLine-W	350.00	298.50			

> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

Dimensions of the top and bottom flange knockout TwinLine-X

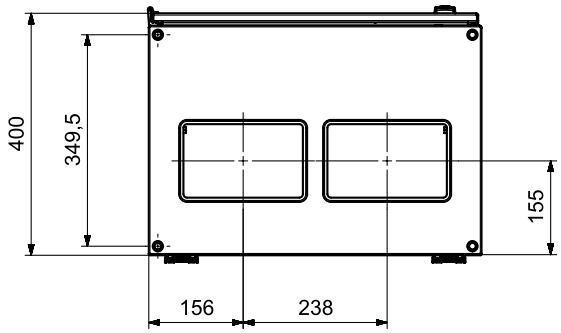

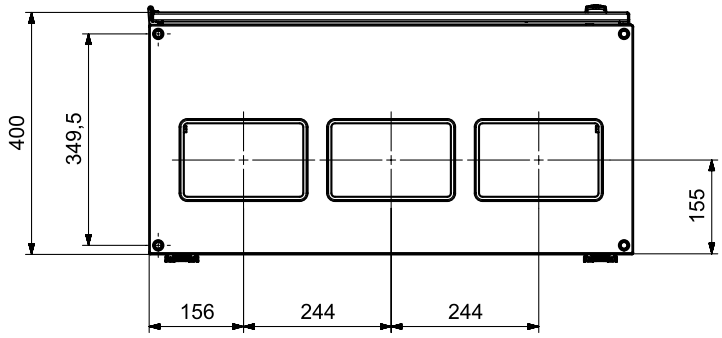

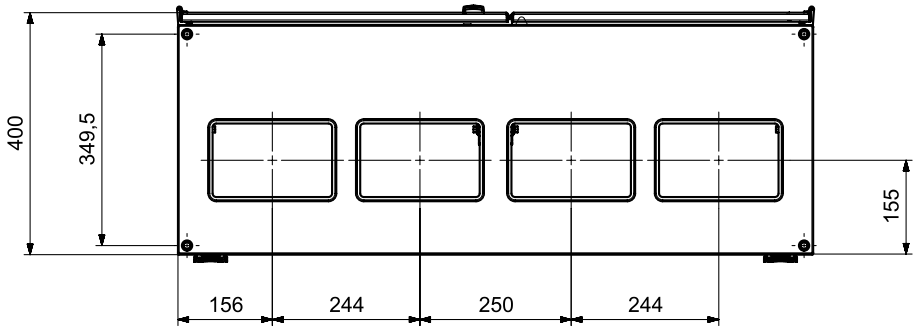

> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

Side view of flange knock-out bottom and top

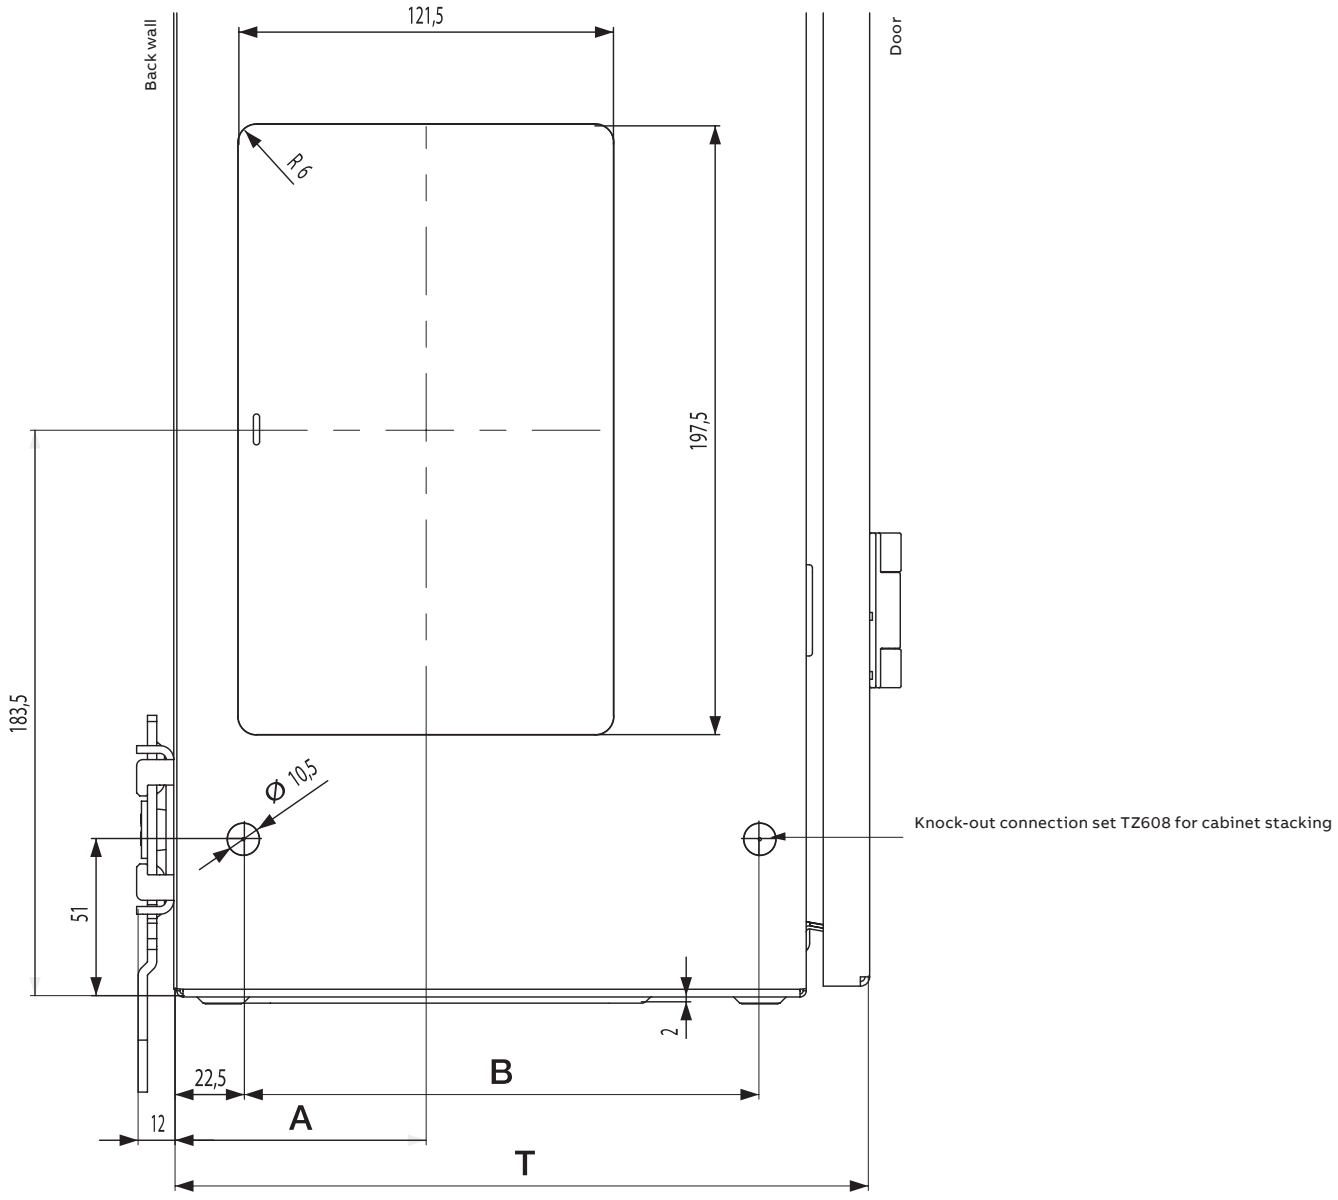

Cabinet series	Depth	A	B
TwinLine-G	225.00	80.50	167.00
TwinLine-L	275.00	106.50	217.00
TwinLine-W	350.00	154.50	292.00

> Dimensions in mm

Wall and floor-standing cabinets TwinLine N

Transport by crane

The TwinLine housing can be lifted in accordance with the information given. Here it is imperative that transport eye bolts from ABB STRIEBEL & JOHN with order code TZ615P4 are used. Crane transport must be provided exclusively for individual cabinets! Furthermore, the maximum installation weights of the cabinets must be observed.

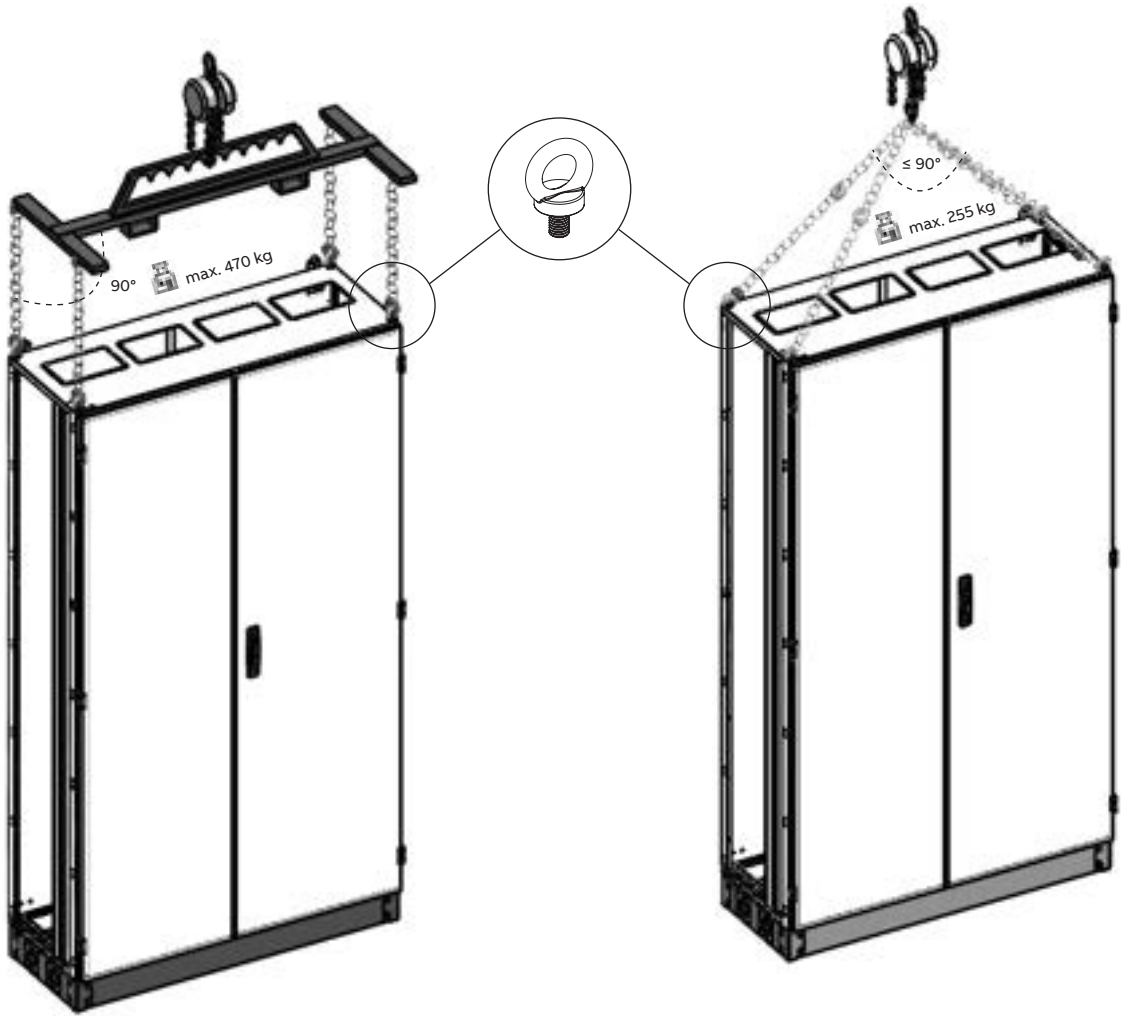

TwinLine N accessories

Dimensions and weight – plinth, height 50 mm

External dimensions/internal dimensions

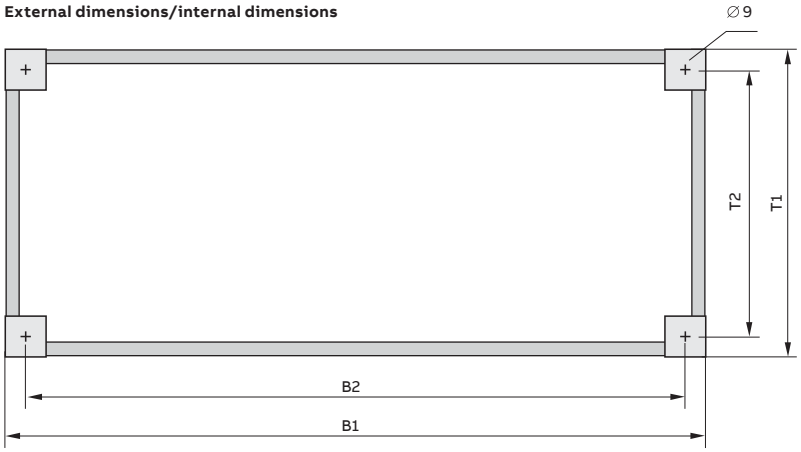



				External dimensions Width x depth		Internal dimensions Width x depth		Weight
		Width						
Height	Depth	PW	Type	B1	D1	W2	D2	in kg
TwinLine-G, plinth 50 mm								
50	225	1	TZG105	300	203.50	270	173.50	1,36
		2	TZG205	550	203.50	520	173.50	1,90
		3	TZG305	800	203.50	770	173.50	2,40
		4	TZG405	1050	203.50	1020	173.50	2,92
		5	TZG505	1300	203.50	1270	173.50	3,43
TwinLine-L, plinth 50 mm								
50	275	1	TZL105	300	253.50	270	223.50	1,48
		2	TZL205	550	253.50	520	223.50	2,02
		3	TZL305	800	253.50	770	223.50	2,53
		4	TZL405	1050	253.50	1020	223.50	4,81
		5	TZL505	1300	253.50	1270	223.50	5,75
TwinLine-W, plinth 50 mm								
50	350	1	TZW105	300	328.50	270	298.50	1,67
		2	TZW205	550	328.50	520	298.50	2,21
		3	TZW305	800	328.50	770	298.50	2,72
		4	TZW405	1050	328.50	1020	298.50	4,99
		5	TZW505	1300	328.50	1270	298.50	5,93
		6	TZW605	1550	328.50	1520	298.50	6,87
TwinLine-X, plinth 50 mm								
50	400	2	TZX205	550	378,50	520	348,5	2,30
		3	TZX305	800	378,50	770	348,5	2,80
		4	TZX405	1050	378,50	1020	348,5	5,10

> Dimensions in mm

TwinLine N accessories

Dimensions and weight – plinth, height 100 mm

External dimensions/internal dimensions

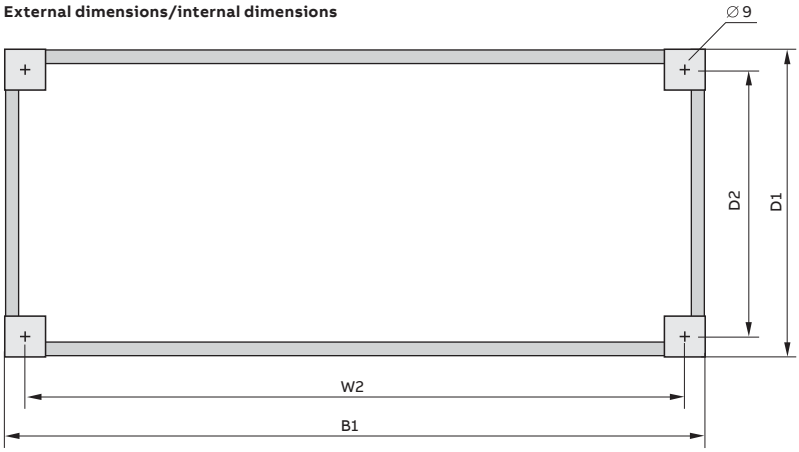

Detail view for side knock-outs

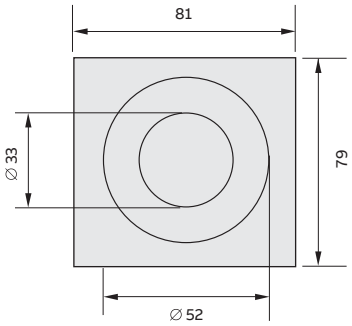

View of side knock-outs TwinLine-G and -L

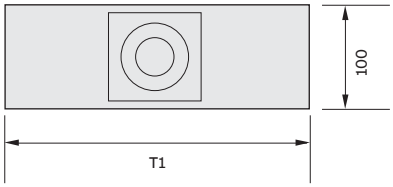

View of side knock-outs TwinLine-W and -X

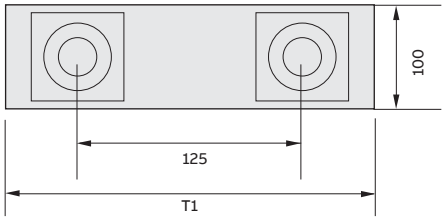

		Width		External dimensions Width x depth		Internal dimensions Width x depth		Weight
Height	**Depth**	**PW**	**Type**	**B1**	**D1**	**W2**	**D2**	**in kg**
TwinLine-G, plinth 100 mm								
100	225	1	TZG110	300	203.50	270	173.50	2,22
		2	TZG210	550	203.50	520	173.50	3,06
		3	TZG310	800	203.50	770	173.50	3,86
		4	TZG410	1050	203.50	1020	173.50	4,66
		5	TZG510	1300	203,50	1270	173.50	5,47
TwinLine-L, plinth 100 mm								
100	275	1	TZL110	300	253.50	270	223.50	2,40
		2	TZL210	550	253.50	520	223.50	3,24
		3	TZL310	800	253.50	770	223.50	4,04
		4	TZL410	1050	253.50	1020	223.50	6,64
		5	TZL510	1300	253.50	1270	223.50	8,94
TwinLine-W, plinth 100 mm								
100	350	1	TZW110	300	328.50	270	298.50	2,67
		2	TZW210	550	328.50	520	298.50	3,51
		3	TZW310	800	328.50	770	298.50	4,31
		4	TZW410	1050	328.50	1020	298.50	6,92
		5	TZW510	1300	328,50	1270	298.50	8,15
		6	TZW610	1550	328,50	1520	298.50	9,38
TwinLine-X, plinth 100 mm								
100	400	2	TZX210	550	378.50	520	348.5	3,7
		3	TZX310	800	378.50	770	348.5	4,4
		4	TZX410	1050	378.50	1020	348.5	7,0

> Dimensions in mm

TwinLine N accessories

Dimensions and weights - doors, height 4 to 7 GU

External dimensions
Cabinets with field width 4 and over
Double doors



Usable installation space
Cabinets with field width 4 and over
Double doors

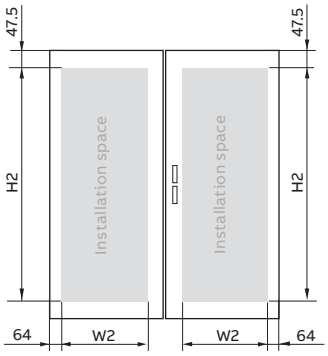

Height		Width			External dimensions Height x width		Installation space Height x width		Weight
GU	OH	PW	Type	Remark	H1	B1	H2	W2	in kg
TwinLine wall cabinets, doors									
4	0	1	TZB104		643	289	548	123	4,21
		2	TZB204		643	539	548	373	6,50
		3	TZB304		643	789	548	623	8,87
		4*1	TZB204L	Left door	643	526 *2	548	373	6,53
			TZB204R	Right door	643	539	548	373	6,53
		5*1	TZB304L	Left door	643	776 *2	548	623	8,87
			TZB204R	Right door	643	539	548	373	6,53
5	1	1	TZB105		793	289	698	123	5,01
		2	TZB205		793	539	698	373	7,80
		3	TZB305		793	789	698	623	10,60
		4*1	TZB205L	Left door	793	526 *2	698	373	7,85
			TZB205R	Right door	793	539	698	373	7,80
		5*1	TZB305L	Left door	793	776 *2	698	623	10,66
			TZB205R	Right door	793	539	698	373	7,80
6	2	1	TZB106		943	289	848	123	5,78
		2	TZB206		943	539	848	373	9,07
		3	TZB306		943	789	848	623	12,33
		4*1	TZB206L	Left door	943	526 *2	848	373	9,17
			TZB206R	Right door	943	539	848	373	9,07
		5*1	TZB306L	Left door	943	776 *2	848	623	12,44
			TZB206R	Right door	943	539	848	373	9,17
7	3	1	TZB107		1093	289	998	123	6,69
		2	TZB207		1093	539	998	373	10,45
		3	TZB307		1093	789	998	623	14,17
		4*1	TZB207L	Left door	1093	526 *2	998	373	10,60
			TZB207R	Right door	1093	539	998	373	10,44
		5*1	TZB307L	Left door	1093	776 *2	998	623	14,33
			TZB207R	Right door	1093	539	998	373	10,44

*1 Double doors field width 4 and over
*2 Dimensions including door center bar

> Dimensions in mm

TwinLine N accessories

Dimensions and weights – doors, height 8 to 12 GU

External dimensions
Cabinets with field width 4 and over
Double doors



Usable installation space
Cabinets with field width 4 and over
Double doors

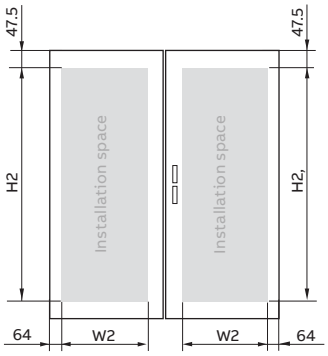

Height		Width			External dimensions Height x width		Installation space Height x width		Weight	Max. installation weight
GU	OH	PW	Type	Remark	H1	B1	H2	W2	in kg	in kg
TwinLine wall cabinets, doors										
8	4	1	TZB108		1243	289	1148	123	7,50	5.00
		2	TZB208		1243	539	1148	373	11,72	5.00
		3	TZB308		1243	789	1148	623	15,91	7.50
		4*	TZB208L	Left door	1243	526 *2	1148	373	11,92	5.00
			TZB208R	Right door	1243	539	1148	373	11,71	5.00
		5*	TZB308L	Left door	1243	776 *2	1148	623	16,11	7.50
			TZB208R	Right door	1243	539	1148	373	11,71	5.00
9	5	1	TZB109		1393	289	1298	123	8,30	5.00
		2	TZB209		1393	539	1298	373	12,99	5.00
		3	TZB309		1393	789	1298	623	17,64	7.50
		4*	TZB209L	Left door	1393	526 *2	1298	373	13,24	5.00
			TZB209R	Right door	1393	539	1298	373	12,98	5.00
		5*	TZB309L	Left door	1393	776 *2	1298	623	17,89	7.50
			TZB209R	Right door	1393	539	1298	373	12,98	5.00
TwinLine standing cabinets, doors										
12	8		TZB112	Single door	1843	289	1748	123	10,7	5.00
			TZB212	Single door	1843	539	1748	373	16,82	5.00
			TZB112L	Left door**	1843	243,5	1748	123	12,91	5.00
			TZB112R	Right door**	1843	291	1748	123	13 ,77	5.00
			TZB312	Single door	1843	789	1748	623	22,83	7.50
			TZB1512L	Left door**	1843	390,5	1748	270	14,94	5.00
			TZB1512R	Right door**	1843	394	1748	226	15,75	5.00
			TZB212L	Left door	1843	493,5	1748	373	15,82	5.00
			TZB212R	Right door	1843	541	1748	373	16,78	5.00
			TZB312L	Left door	1843	743,5	1748	623	21,86	7.50
			TZB212R	Right door	1843	541	1748	373	16 ,78	5.00
			TZB2512L	Left door**	1843	640,5	1748	520	22,4	5.00
			TZB2512R	Right door**	1843	644	1748	476	23,25	5.00
			TZB312L	Left door	1843	743,5	1748	623	21,86	7.50
			TZB312R	Right door	1843	791	1748	623	22,82	7.50

* Double doors field width 4 and over
*2 Dimensions including door center bar

> Dimensions in mm

TwinLine N accessories

Dimensions and weights – doors with viewing window, height 4 to 7 GU

External dimensions
Cabinets with field width 4 and over
Double doors



Dimensions of field of view
Cabinets with field width 4 and over
Double doors

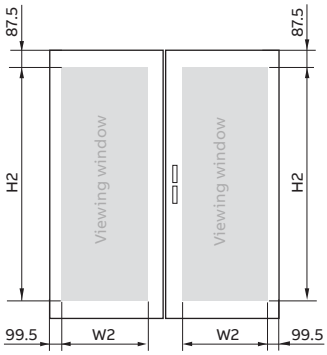

Height		Width			External dimensions Height x width		Field of view Height x width		Weight
GU	OH	PW	Type	Remark	H1	B1	H2	W2	in kg
TwinLine wall cabinets, doors									
4	0	2	TZT204		643	539	468	340	6,44
		3	TZT304		643	789	468	590	8,67
		4*1	TZT204L	Left door	643	526 *2	468	340	6,47
			TZT204R	Right door	643	539	468	340	6,46
		5*1	TZT304L	Left door	643	776 *2	468	590	8,38
			TZT204R	Right door	643	539	468	340	6,46
5	1	2	TZT205		793	539	618	340	7,59
		3	TZT305		793	789	618	590	10,18
		4*1	TZT205L	Left door	793	526 *2	618	340	7,37
			TZT205R	Right door	793	539	618	340	7,49
		5*1	TZT305L	Left door	793	776 *2	618	590	9,92
			TZT205R	Right door	793	539	618	340	
6	2	2	TZT206		943	539	768	340	8,73
		3	TZT306		943	789	768	590	11,50
		4*1	TZT206L	Left door	943	526 *2	768	340	8,47
			TZT206R	Right door	943	539	768	340	8,62
		5*1	TZT306L	Left door	943	776 *2	768	590	11,39
			TZT206R	Right door	943	539	768	340	8,62
7	3	2	TZT207		1093	539	918	340	10,00
		3	TZT307		1093	789	918	590	12,96
		4*1	TZT207L	Left door	1093	526 *2	918	340	9,69
			TZT207R	Right door	1093	539	918	340	9,82
		5*1	TZT307L	Left door	1093	776 *2	918	590	12,97
			TZT207R	Right door	1093	539	918	340	9,82

*1 Double doors field width 4 and over
*2 Dimensions including door center bar

> Dimensions in mm

TwinLine N accessories

Dimensions and weights - doors with viewing window, height 8 to 12 GU

External dimensions
Cabinets with field width 4 and over
Double doors



Dimensions of field of view
Cabinets with field width 4 and over
Double doors

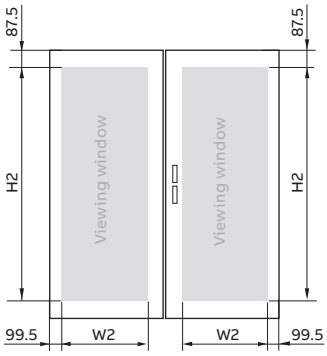

Height		Width			External dimensions Height x width		Field of view Height x width		Weight
GU	OH	PW	Type	Remark	H1	B1	H2	W2	in kg
TwinLine wall cabinets, doors									
8	4	2	TZT208		1243	539	1068	340	11,10
		3	TZT308		1243	789	1068	590	14,60
		4*	TZT208L	Left door	1243	526 *2	1068	340	10,88
			TZT208R	Right door	1243	539	1068	340	11,09
		5*	TZT308L	Left door	1243	776 *2	1068	590	14,62
			TZT208R	Right door	1243	539	1068	340	11,09
9	5	2	TZT209		1393	539	1218	340	12,24
		3	TZT309		1393	789	1218	590	16,08
		4*	TZT209L	Left door	1393	526 *2	1218	340	11,98
			TZT209R	Right door	1393	539	1218	340	11,49
		5*	TZT309L	Left door	1393	776 *2	1218	590	15,97
			TZT209R	Right door	1393	539	1218	340	11,49
TwinLine standing cabinets, doors									
12	8	2	TZT212		1843	539	1668	340	15,63
		3	TZT312		1843	789	1668	590	20,72
		4*	TZT212L	Left door	1843	526 *2	1668	340	14,21
			TZT212R	Right door	1843	539	1668	340	15,41
		5*	TZT312L	Left door	1843	776 *2	1668	590	19,30
			TZT212R	Right door	1843	539	1668	340	15,41
		6*	TZT312L	Left door	1843	776 *2	1668	590	19,30
			TZT312R	Right door	1843	789	1668	590	19,91

* Double doors field width 4 and over
*2 Dimensions including door center bar

TwinLine N accessories

Dimensions and weights – mounting plates

External dimensions/usable installation space
Mounting plate



Height		Width		External dimensions		Installation space		Weight
GU	OH	PW	Type	H	W	H1	B1	in kg
Mounting plates for TwinLine wall cabinets ⏚								
4	0	1	TZM104	600	246	522	160	3,68
		2	TZM204	600	496	522	410	5,97
		3	TZM304	600	746	522	660	8,30
		4	TZM404	600	996	522	910	10,62
		5	TZM504	600	1246	522	1160	12,94
5	1	1	TZM105	750	246	672	160	4,60
		2	TZM205	750	496	672	410	7,49
		3	TZM305	750	746	672	660	10,42
		4	TZM405	750	996	672	910	13,33
		5	TZM505	750	1246	672	1160	16,22
6	2	1	TZM106	900	246	822	160	5,53
		2	TZM206	900	496	822	410	9,00
		3	TZM306	900	746	822	660	12,53
		4	TZM406	900	996	822	910	16,04
		5	TZM506	900	1246	822	1160	19,59
7	3	1	TZM107	1050	246	972	160	6,45
		2	TZM207	1050	496	972	410	10,52
		3	TZM307	1050	746	972	660	14,65
		4	TZM407	1050	996	972	910	18,75
		5	TZM507	1050	1246	972	1160	22,84
8	4	1	TZM108	1200	246	1122	160	7,38
		2	TZM208	1200	496	1122	410	12,04
		3	TZM308	1200	746	1122	660	16,76
		4	TZM408	1200	996	1122	910	21,46
		5	TZM508	1200	1246	1122	1160	25,73
9	5	1	TZM109	1350	246	1272	160	8,30
		2	TZM209	1350	496	1272	410	13,55
		3	TZM309	1350	746	1272	660	18,88
		4	TZM409	1350	996	1272	910	24,17
		5	TZM509	1350	1246	1272	1160	29,01
Mounting plates for TwinLine standing cabinets ⏚								
12	8	1	TZM112	1800	246	1722	160	11,23
		2	TZM212	1800	496	1722	410	18,51
		3	TZM312	1800	746	1722	660	21,84
		4	TZM412	1800	996	1722	910	34,61

> Dimensions in mm

Notes

TwinLine N accessories

Meter applications



TZ610

Inner cladding TZ610
For meter fields, depth = 225 - 350 mm
Additional profile for meter fields with 150 mm connection compartment in the insulated cabinet

TZ614

Cover strip TZ612-614
Required for installation of meter fields in insulated cabinets for compliance with protection class IPXXB in the area of unnecessary fastening points for the middle support rail

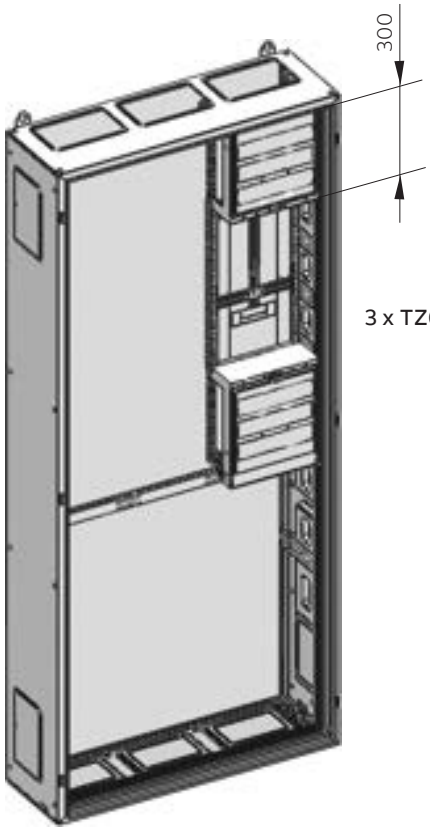

3 x TZ612-614

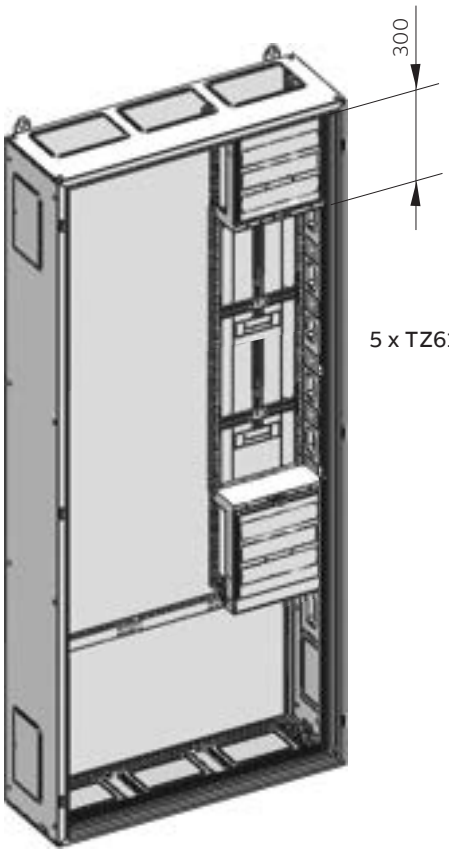

5 x TZ612-614

> Dimensions in mm

TwinLine N accessories

LED control cabinet lights TZ650

Technical specifications	
Operating voltage	24 V – 265 V AC / DC
Power consumption	6 W
Light output	700 lm
Lighting level	1200 lx, 0.5 m 450 lx, 1.0 m
Color temperature	5,000 K
Degree of protection	IP 20
Protection class	II
Lifetime (std. at 20 °C)	50,000 h
Terminal	Push-in connector
Housing material	Polycarbonate
Weight	140 g
Max. humidity [% rH]	90 %
Operating temperature [° C]	- 20 °C to + 60 °C
Ambient temperature (storage)	- 40 °C to + 85 °C
Approvals	CE

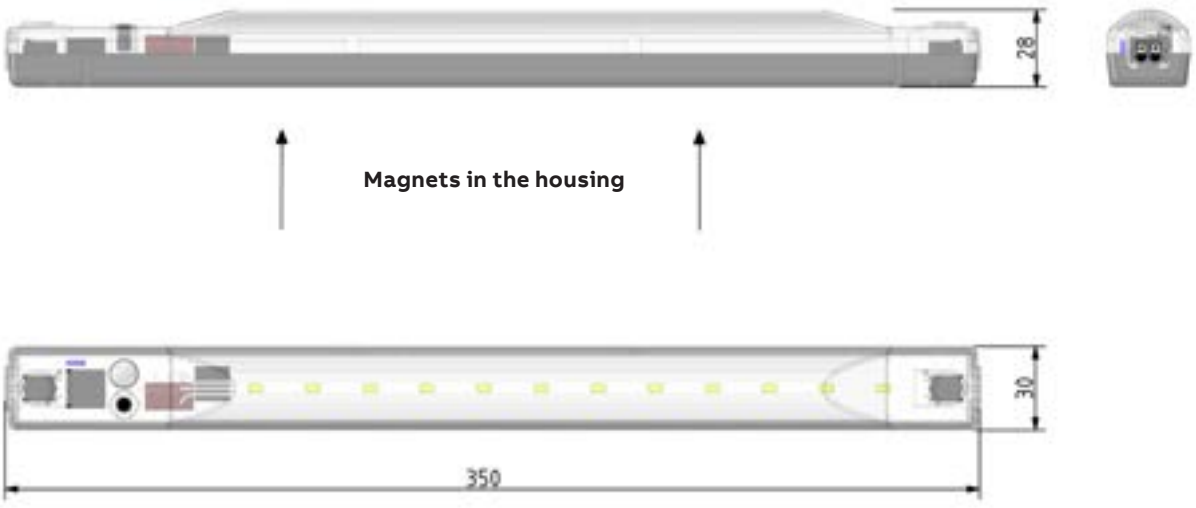

Dimensions in mm

TriLine C switchgear cabinets

Switchgear cabinets for expansion with CombiLine N

TriLine C switchgear cabinets

Technical data and product features

TriLine C switchgear cabinets ⏚	
Standards/regulations	DIN 43660, IEC 61439-1/-2, DIN EN 61439-1/-2, DIN VDE 0660-600-1/-2
impact resistance rating	IK 10 for the cabinet housing
	IK 10 for sheet steel doors
	IK 07 for transparent doors
Protection class	IP54 with door, rear panel, top plate, side panel
	IP30* without door, with rear panel, top plate and side panel
	IP20 for the bottom plate area with bottom plate
	IP00 for the bottom plate area without bottom plate
Ambient conditions	Indoor installation
	Ambient temperature max. + 40 °C
	Ambient temperature min. - 5 °C
	Average ambient temperature over 24h 35°C
	Storage temperature max. + 40 °C
	Storage temperature min. - 5 °C
Housing and doors	
Profile	Made of galvanized sheet steel, profiled 36-gauge
Framework	Inserted and screwed together
External panels	Made of folded sheet steel, 1.5 mm/2 mm
Surface	Color RAL 7035, powder-coated
Rear panels	Double rear panels on cabinets for 4 and 5 panel widths
Doors	Double doors for 4 and 5 panel widths
	Door hinge left or right
	Door opening angle up to 180° (standard 135°)
	Doors with espagnolette closure
Locking system	Standard closure 3 mm double-bit

* For expansion as distribution boards with meter panels and distribution panels, combination sets or CombiLine N modules

TriLine C switchgear cabinets

Cabinet selection

Cabinet selection 1

Switchgear cabinet
Empty cabinet with door,
rear panel and top plate,
one flange opening per panel width
(order other parts separately)

Cabinet selection 2

Switchgear cabinet frame
Frame with rear panel
(order other parts separately)

Cabinet selection 3

Switchgear cabinet in kits
All parts must be ordered separately,
supplied in kits

TriLine C switchgear cabinets

Assembly options

Installation of mounting plate
Expansion for control technology with mounting plate

Installation of EDF mounting frame
Expansion as installation distribution board with meter panels and distribution panels, combination sets or CombiLine modules on EDF mounting frame, using EDF installation set on WR mounting frame

Installation of WR mounting frame
Expansion as an installation distribution board with CombiLine modules on WR mounting frame

Installation of cross members
Expansion with various cross members and profile rails

TriLine C switchgear cabinets

Cabinet selection 1

R312T6

Included in the scope of delivery

- Empty cabinet with door, rear panel and top plate

Accessories must be ordered separately

- Side panel
- Connection set
- Bottom plate IP20 (bottom plate area without bottom plate IP00)
- Flanges
- Plinth
- Touch-protection for installation with CombiLine modules

Switchgear cabinet						GU12, OH 8, 1913mm		GU14, OH 10, 2213mm	
Depth in mm	Width in mm	PW	Number of PLE GU 12	Number of PLE GU 14	Piece	Type	Item number	Type	Item number
325	364	1	144	168	1	R112T3	2CPX047200R9999	R114T3	2CPX047205R9999
	614	2	288	336	1	R212T3	2CPX047201R9999	R214T3	2CPX047206R9999
	864	3	432	504	1	R312T3	2CPX047202R9999	R314T3	2CPX047207R9999
	1114	4	576	672	1	R412T3	2CPX047203R9999	R414T3	2CPX047208R9999
	1364	5	720	840	1	R512T3	2CPX047204R9999	R514T3	2CPX047209R9999
425	364	1	144	168	1	R112T4	2CPX047061R9999	R114T4	2CPX047066R9999
	614	2	288	336	1	R212T4	2CPX047062R9999	R214T4	2CPX047067R9999
	864	3	432	504	1	R312T4	2CPX047063R9999	R314T4	2CPX047068R9999
	1114	4	576	672	1	R412T4	2CPX047064R9999	R414T4	2CPX047069R9999
	1364	5	720	840	1	R512T4	2CPX047065R9999	R514T4	2CPX047070R9999
625	364	1	144	168	1	R112T6	2CPX047071R9999	R114T6	2CPX047076R9999
	614	2	288	336	1	R212T6	2CPX047072R9999	R214T6	2CPX047077R9999
	864	3	432	504	1	R312T6	2CPX047073R9999	R314T6	2CPX047078R9999
	1114	4	576	672	1	R412T6	2CPX047074R9999	R414T6	2CPX047079R9999
	1364	5	720	840	1	R512T6	2CPX047075R9999	R514T6	2CPX047080R9999

> Plinths and accessories see page
> Bottom plates see page
> Side panels and accessories see page
> Flanges and cable sleeves see page <?>
> For parts for interior fitting, see Chapter 8 CombiLine N interior fitting system
> Dimensions, power dissipations and weights TriLine R...T3, R...T4, R...T6 see Technical data starting on page 28

TriLine C switchgear cabinets

Cabinet selection 2

R312T6B

Included in the scope of delivery

- Empty cabinet with rear panel

Accessories must be ordered separately

- Top plate
- Side panel
- Connection set
- Bottom plate IP20 (bottom plate area without bottom plate IP00)
- Flanges
- Plinth
- Touch-protection for installation with CombiLine modules

Switchgear cabinet frame						GU12, OH8, 1913 mm		GU14, OH 10, 2213mm	
Depth in mm	Width in mm	PW	Number of PLE GU 12	Number of PLE GU 14	Piece	Type	Item number	Type	Item number
325	364	1	144	168	1	R112T3B	2CPX047210R9999	R114T3B	2CPX047215R9999
	614	2	288	336	1	R212T3B	2CPX047211R9999	R214T3B	2CPX047216R9999
	864	3	432	504	1	R312T3B	2CPX047212R9999	R314T3B	2CPX047217R9999
	1114	4	576	672	1	R412T3B	2CPX047213R9999	R414T3B	2CPX047218R9999
	1364	5	720	840	1	R512T3B	2CPX047214R9999	R514T3B	2CPX047219R9999
425	364	1	144	168	1	R112T4B	2CPX047081R9999	R114T4B	2CPX047086R9999
	614	2	288	336	1	R212T4B	2CPX047082R9999	R214T4B	2CPX047087R9999
	864	3	432	504	1	R312T4B	2CPX047083R9999	R314T4B	2CPX047088R9999
	1114	4	576	672	1	R412T4B	2CPX047084R9999	R414T4B	2CPX047089R9999
	1364	5	720	840	1	R512T4B	2CPX047085R9999	R514T4B	2CPX047090R9999
625	364	1	144	168	1	R112T6B	2CPX047091R9999	R114T6B	2CPX047096R9999
	614	2	288	336	1	R212T6B	2CPX047092R9999	R214T6B	2CPX047097R9999
	864	3	432	504	1	R312T6B	2CPX047093R9999	R314T6B	2CPX047098R9999
	1114	4	576	672	1	R412T6B	2CPX047094R9999	R414T6B	2CPX047099R9999
	1364	5	720	840	1	R512T6B	2CPX047095R9999	R514T6B	2CPX047100R9999

> Plinths and accessories see page
> Sheet steel doors, transparent doors and front frames see page
> Bottom plates see page
> Top plates see page
> Side panels and accessories see page
> Flanges and cable sleeves see page <?>
> For parts for interior fitting, see Chapter 8 CombiLine N interior fitting system
> Dimensions, power dissipations and weights TriLine R...T3, R...T4, R...T6 see Technical data starting on page 28

TriLine C switchgear cabinets

Cabinet selection 3

TriLine Cabinet frame in kits

- All parts must be ordered separately – delivered in kits
- The width, depth and height profile kits contain 4 profiles
- One set is needed for each cabinet frame
- Corner pieces and hinges are also necessary
- Accessories must be ordered separately:
  Plinth, flanges, side panels, bottom plates, top plates, doors,
  front trim frames and rear panels, parts for interior fittings, general accessories
- Pallet quantities available on request

Article		Piece	Type	Item number
RPB1P4	**Width profiles**			
	1-panel wide	4	RPB1P4	2CPX046771R9999
	2-panel wide, this profile is also used for cabinet depth 6	4	RPB2P4	2CPX046772R9999
	3-panel wide	4	RPB3P4	2CPX046774R9999
	4-panel wide	4	RPB4P4	2CPX046775R9999
	5-panel wide	4	RPB5P4	2CPX046776R9999
	Depth profiles	4	RPT3P4	2CPX046779R9999
	Cabinet depth 4	4	RPT4P4	2CPX046780R9999
	Cabinet depth 6, use of width profile 2-panel wide	4	RPB2P4	2CPX046772R9999
	Height profiles			
	12 GU, OH 8	4	RPH8P4	2CPX046777R9999
	14 GU, OH 10	4	RPH10P4	2CPX046778R9999
RZ200	**Cabinet – corner components** 8 inner and 8 outer corners including fixing screws	1	RZ200	2CPX046782R9999
RZ201	**Hinges for cabinet frames with end-to-end door** 16 standard hinges, incl. fixing materials	1	RZ201	2CPX046783R9999

> Plinths and accessories see page
> Sheet steel doors, transparent doors and front frames see page
> Rear panels see page
> Bottom plates see page
> Top plates see page
> Side panels and accessories see page
> Flanges and cable sleeves see page <?>
> For parts for interior fitting, see Chapter 8 CombiLine N interior fitting system
> Dimensions, power dissipations and weights TriLine R...T4, R...T6 see Technical data starting on page 28

TriLine C switchgear cabinets

Corner cabinets

R312T6B

Included in the scope of delivery

- Empty cabinet with door, rear panel, top and bottom plate
- IP54, bottom plate IP20

Accessories must be ordered seperately

- Plinth

Corner cabinet for TriLine C			GU12, OH8, 1913 mm		GU14, OH 10, 2213mm	
Depth in mm	Width in mm	Piece	Type	Item number	Type	Item number
425	554	1	RE 12T4	2CPX024099R9999	RE 14T4	2CPX024100R9999
625	744	1	RE 12T6	2CPX024101R9999	RE 14T6	2CPX024102R9999

TriLine C switchgear cabinets

Plinths

Article	Depth in mm	Width PW	Piece	Set unassembled Type	Item number	Pre-assembled,* installed in the cabinet Type	Item number
Pinth, height 100mm, color RAL 9005							
RZS36	325	1	1	RZS13	2CPX047101R9999	RZS13A	2CPX047106R9999
		2	1	RZS23	2CPX047102R9999	RZS23A	2CPX047107R9999
		3	1	RZS33	2CPX047103R9999	RZS33A	2CPX047108R9999
		4	1	RZS43	2CPX047104R9999	RZS43A	2CPX047109R9999
		5	1	RZS53	2CPX047105R9999	RZS53A	2CPX047110R9999
	425	1	1	RZS14	2CPX047046R9999	RZS14A	2CPX020014R9999
		2	1	RZS24	2CPX047047R9999	RZS24A	2CPX020015R9999
		3	1	RZS34	2CPX047048R9999	RZS34A	2CPX020016R9999
		4	1	RZS44	2CPX047049R9999	RZS44A	2CPX020017R9999
		5	1	RZS54	2CPX047050R9999	RZS54A	2CPX020018R9999
	625	1	1	RZS16	2CPX047051R9999	RZS16A	2CPX020019R9999
		2	1	RZS26	2CPX047052R9999	RZS26A	2CPX020020R9999
		3	1	RZS36	2CPX047053R9999	RZS36A	2CPX020021R9999
		4	1	RZS46	2CPX047054R9999	RZS46A	2CPX020022R9999
		5	1	RZS56	2CPX047055R9999	RZS56A	2CPX020023R9999

* Only in conjunction with the factory-installed meter and distributor fields, combination kits or CombiLine modules

Article	Height 100mm, color RAL 9005	Piece	Set unassembled Type	Item number
Plinth for corner cabinets				
RZSSET4	42 5 x 544mm	1	RZSET4	2CPX024103R9999
	62 5 x 744mm	1	RZSET6	2CPX024104R9999

TriLine C switchgear cabinets

Accessories plinth

Article		Piece	Type	Item number
RZ5P4	**High plinth connector** For screw connection of two plinths on top of each other	4	RZ5P4	2CPX046008R9999
RZ3P4	**Plinth fastener** For securing the plinth on the floor	4	RZ3P4	2CPX046006R9999
RZ4P4	**Level adjustment** For plinths from 0 mm to 38 mm	4	RZ4P4	2CPX046007R9999
RZ35P2	**Mounting bracket** For cable clamp rail in the plinth	2	RZ35P2	2CPX046010R9999
RZB110	**Cable clamp rail for plinth**			
	1-panel wide	1	RZB110	2CPX046039R9999
	2-panel wide	1	RZB210	2CPX046040R9999
	3-panel wide	1	RZB310	2CPX046041R9999
	4-panel wide	1	RZB410	2CPX046042R9999
	5-panel wide	1	RZB510	2CPX046043R9999

TriLine C switchgear cabinets

Sheet steel doors, transparent doors and front frames

Article	Height		Width			Set unassembled		Pre-assembled, installed in the cabinet*	
	GU	OH	PW	Remark	Piece	Type	Item number	Type	Item number
Sheet steel doors, color RAL 7035									
RZB312	12	8	1		1	RZB112	2CPX046986R9999	RZB112A	2CPX020084R9999
			2		1	RZB212	2CPX046987R9999	RZB212A	2CPX020085R9999
			3		1	RZB312	2CPX046988R9999	RZB312A	2CPX020086R9999
			4	Door left	1	RZB412L	2CPX046989R9999	RZB412LA	2CPX020087R9999
				Door right	1	RZB412R	2CPX046990R9999	RZB412RA	2CPX020088R9999
			5	Door left	1	RZB512L	2CPX046991R9999	RZB512LA	2CPX020089R9999
				Door right	1	RZB512R	2CPX046992R9999	RZB512RA	2CPX020090R9999
	14	10	1		1	RZB114	2CPX046993R9999	RZB114A	2CPX020091R9999
			2		1	RZB214	2CPX046994R9999	RZB214A	2CPX020092R9999
			3		1	RZB314	2CPX046995R9999	RZB314A	2CPX020093R9999
			4	Door left	1	RZB414L	2CPX046996R9999	RZB414LA	2CPX020094R9999
				Door right	1	RZB414R	2CPX046997R9999	RZB414RA	2CPX020095R9999
			5	Door left	1	RZB514L	2CPX046998R9999	RZB514LA	2CPX020096R9999
				Door right	1	RZB514R	2CPX046999R9999	RZB514RA	2CPX020097R9999
Sheet steel doors with viewing glass									
RZT312	12	8	2		1	RZT212	2CPX047033R9999	RZT212A	2CPX020001R9999
			3		1	RZT312	2CPX047034R9999	RZT312A	2CPX020002R9999
			4	Door left	1	RZT412L	2CPX047035R9999	RZT412LA	2CPX020003R9999
				Door right	1	RZT412R	2CPX047036R9999	RZT412RA	2CPX020004R9999
			5	Door left	1	RZT512L	2CPX047037R9999	RZT512LA	2CPX020005R9999
				Door right	1	RZT512R	2CPX047038R9999	RZT512RA	2CPX020006R9999
	14	10	2		1	RZT214	2CPX047040R9999	RZT214A	2CPX020008R9999
			3		1	RZT314	2CPX047041R9999	RZT314A	2CPX020009R9999
			4	Door left	1	RZT414L	2CPX047042R9999	RZT414LA	2CPX020010R9999
				Door right	1	RZT414R	2CPX047043R9999	RZT414RA	2CPX020011R9999
			5	Door left	1	RZT514L	2CPX047044R9999	RZT514LA	2CPX020012R9999
				Door right	1	RZT514R	2CPX047045R9999	RZT514RA	2CPX020013R9999
RF838	**Trim frame** For panel design with covers (mounting position of the covers max. 27 mm from the front edge of the trim frame), color RAL 7035								
	12	8	1		1	RFB18	2CPX045940R9999	-	
			2		1	RFB28	2CPX045941R9999	-	
			3		1	RFB38	2CPX045942R9999	-	
			4		1	RFB48	2CPX045943R9999	-	
			5		1	RFB58	2CPX045944R9999	-	
	14	10	1		1	RFB110	2CPX045945R9999	-	
			2		1	RFB210	2CPX045946R9999	-	
			3		1	RFB310	2CPX045947R9999	-	
			4		1	RFB410	2CPX045948R9999	-	
			5		1	RFB510	2CPX045949R9999	-	

* Only in conjunction with the factory-installed meter and distributor fields, combination kits or CombiLine modules

TriLine C switchgear cabinets

Rear panels

Article	Height		Width		Set unassembled	
	GU	OH	PW	Piece	Type	Item number
	Rear panels Rear panel made of sheet steel, color RAL 7035 Double rear panels for 4 and 5 panel widths					
 RRW18	12	8	1	1	RRW18	2CPX046511R9999
			2	1	RRW28	2CPX046512R9999
			3	1	RRW38	2CPX046513R9999
			4	1	RRW48L	2CPX046514R9999
				1	RRW48R	2CPX046515R9999
			5	1	RRW58L	2CPX046516R9999
				1	RRW58R	2CPX046517R9999
 RRW110	14	10	1	1	RRW110	2CPX046518R9999
			2	1	RRW210	2CPX046519R9999
			3	1	RRW310	2CPX046520R9999
			4	1	RRW410L	2CPX046521R9999
				1	RRW410R	2CPX046522R9999
			5	1	RRW510L	2CPX046523R9999
				1	RRW510R	2CPX046524R9999

TriLine C switchgear cabinets

Bottom plates

Article	Depth in mm	Width PW	Piece	Set unassembled Type	Set unassembled Item number	Pre-assembled, installed in the cabinet* Type	Pre-assembled, installed in the cabinet* Item number
	Bottom plate closed, IP20 Galvanized sheet steel						
RB34G	325	1	1	RB13G	2CPX045765R9999	RB13GA	2CPX047245R9999
		2	1	RB23G	2CPX045766R9999	RB23GA	2CPX047246R9999
		3	1	RB33G	2CPX045767R9999	RB33GA	2CPX047247R9999
		4	1	RB43G	2CPX045768R9999	RB43GA	2CPX047248R9999
		5	1	RB53G	2CPX045769R9999	RB53GA	2CPX047249R9999
	425	1	1	RB14G	2CPX045770R9999	RB14GA	2CPX047137R9999
		2	1	RB24G	2CPX045771R9999	RB24GA	2CPX047138R9999
		3	1	RB34G	2CPX045772R9999	RB34GA	2CPX047139R9999
		4	1	RB44G	2CPX045773R9999	RB44GA	2CPX047140R9999
		5	1	RB54G	2CPX045774R9999	RB54GA	2CPX047141R9999
	625	1	1	RB16G	2CPX045775R9999	RB16GA	2CPX047142R9999
		2	1	RB26G	2CPX045776R9999	RB26GA	2CPX047143R9999
		3	1	RB36G	2CPX045777R9999	RB36GA	2CPX047144R9999
		4	1	RB46G	2CPX045778R9999	RB46GA	2CPX047145R9999
		5	1	RB56G	2CPX045779R9999	RB56GA	2CPX047146R9999
	Bottom plate with one flange opening per panel width, IP20 For flange TZ...; galvanized sheet steel						
RB36F3	325	1	1	RB13F3	2CPX047240R9999	RB13F3A	2CPX047230R9999
		2	1	RB23F3	2CPX047241R9999	RB23F3A	2CPX047231R9999
		3	1	RB33F3	2CPX047242R9999	RB33F3A	2CPX047232R9999
		4	1	RB43F3	2CPX047243R9999	RB43F3A	2CPX047233R9999
		5	1	RB53F3	2CPX047244R9999	RB53F3A	2CPX047234R9999
	425	1	1	RB14F3	2CPX047127R9999	RB14F3A	2CPX024089R9999
		2	1	RB24F3	2CPX047128R9999	RB24F3A	2CPX024090R9999
		3	1	RB34F3	2CPX047129R9999	RB34F3A	2CPX024091R9999
		4	1	RB44F3	2CPX047130R9999	RB44F3A	2CPX024092R9999
		5	1	RB54F3	2CPX047131R9999	RB54F3A	2CPX024093R9999
	625 with front sliding parts	1	1	RB16F3	2CPX047132R9999	RB16F3A	2CPX024094R9999
		2	1	RB26F3	2CPX047133R9999	RB26F3A	2CPX024095R9999
		3	1	RB36F3	2CPX047134R9999	RB36F3A	2CPX024096R9999
		4	1	RB46F3	2CPX047135R9999	RB46F3A	2CPX024097R9999
		5	1	RB56F3	2CPX047136R9999	RB56F3A	2CPX024098R9999
	Bottom plate with flange opening With sinusoidal foam rubber flange, IP00, galvanized sheet steel						
RB34F	425	2	1	RB24F	2CPX046624R9999	RB24FA	2CPX047147R9999
		3	1	RB34F	2CPX046627R9999	RB34FA	2CPX047149R9999
		4	1	RB44F	2CPX046630R9999	RB44FA	2CPX047151R9999
		5	1	RB54F	2CPX046633R9999	RB54FA	2CPX047153R9999
	625 with front sliding parts	2	1	RB26F	2CPX046625R9999	RB26FA	2CPX047148R9999
		3	1	RB36F	2CPX046628R9999	RB36FA	2CPX047150R9999
		4	1	RB46F	2CPX046631R9999	RB46FA	2CPX047152R9999
		5	1	RB56F	2CPX046634R9999	RB56FA	2CPX047154R9999

> Flange see starting from page 20

* Only in conjunction with the factory-installed meter and distributor fields, combination kits or CombiLine modules

TriLine C switchgear cabinets

Top plates

Article	Depth in mm	Width PW	Piece	Set unassembled Type	Set unassembled Item number	Pre-assembled, installed in the cabinet* Type	Pre-assembled, installed in the cabinet* Item number
RD34G	**Top plate closed** Color RAL 7035						
	325	1	1	RD13G	2CPX045711R9999	RD13GA	2CPX047220R9999
		2	1	RD23G	2CPX045712R9999	RD23GA	2CPX047221R9999
		3	1	RD33G	2CPX045713R9999	RD33GA	2CPX047222R9999
		4	1	RD43G	2CPX045714R9999	RD43GA	2CPX047223R9999
		5	1	RD53G	2CPX045715R9999	RD53GA	2CPX047224R9999
	425	1	1	RD14G	2CPX045716R9999	RD14GA	2CPX047155R9999
		2	1	RD24G	2CPX045717R9999	RD24GA	2CPX047156R9999
		3	1	RD34G	2CPX045718R9999	RD34GA	2CPX047157R9999
		4	1	RD44G	2CPX045719R9999	RD44GA	2CPX047158R9999
		5	1	RD54G	2CPX045720R9999	RD54GA	2CPX047159R9999
	625	1	1	RD16G	2CPX045721R9999	RD16GA	2CPX047160R9999
		2	1	RD26G	2CPX045722R9999	RD26GA	2CPX047161R9999
		3	1	RD36G	2CPX045723R9999	RD36GA	2CPX047162R9999
		4	1	RD46G	2CPX045724R9999	RD46GA	2CPX047163R9999
		5	1	RD56G	2CPX045725R9999	RD56GA	2CPX047164R9999
RD36F3	**Top plate with one flange opening per panel width** For flange TZ...; color RAL 7035						
	325	1	1	RD13F3	2CPX047235R9999	RD13F3A	2CPX047225R9999
		2	1	RD23F3	2CPX047236R9999	RD23F3A	2CPX047226R9999
		3	1	RD33F3	2CPX047237R9999	RD33F3A	2CPX047227R9999
		4	1	RD43F3	2CPX047238R9999	RD43F3A	2CPX047228R9999
		5	1	RD53F3	2CPX047239R9999	RD53F3A	2CPX047229R9999
	425	1	1	RD14F3	2CPX047112R9999	RD14F3A	2CPX024074R9999
		2	1	RD24F3	2CPX047113R9999	RD24F3A	2CPX024075R9999
		3	1	RD34F3	2CPX047114R9999	RD34F3A	2CPX024076R9999
		4	1	RD44F3	2CPX047115R9999	RD44F3A	2CPX024077R9999
		5	1	RD54F3	2CPX047116R9999	RD54F3A	2CPX024078R9999
	625	1	1	RD16F3	2CPX047117R9999	RD16F3A	2CPX024079R9999
		2	1	RD26F3	2CPX047118R9999	RD26F3A	2CPX024080R9999
		3	1	RD36F3	2CPX047119R9999	RD36F3A	2CPX024081R9999
		4	1	RD46F3	2CPX047120R9999	RD46F3A	2CPX024082R9999
		5	1	RD56F3	2CPX047121R9999	RD56F3A	2CPX024083R9999
RD36F4	**Top plate with two flange openings per panel width** For flange TZ...; color RAL 7035						
	625	1	1	RD16F4	2CPX047122R9999	RD16F4A	2CPX024084R9999
		2	1	RD26F4	2CPX047123R9999	RD26F4A	2CPX024085R9999
		3	1	RD36F4	2CPX047124R9999	RD36F4A	2CPX024086R9999
		4	1	RD46F4	2CPX047125R9999	RD46F4A	2CPX024087R9999
		5	1	RD56F4	2CPX047126R9999	RD56F4A	2CPX024088R9999

> Flange see starting from page 20

* Spare part is included in the scope of delivery

* Only in conjunction with the factory-installed meter and distributor fields, combination kits or CombiLine modules

TriLine C switchgear cabinets

Top plates

Article	Depth in mm	Width PW	Piece	Set unassembled Type	Set unassembled Item number	Pre-assembled, installed in the cabinet* Type	Pre-assembled, installed in the cabinet* Item number
RZ536	**IP set** for mounting on the top plate*						
	325	1	1	RZ513	2CPX047256R9999	-	
		2	1	RZ523	2CPX047257R9999	-	
		3	1	RZ533	2CPX047258R9999	-	
		4	1	RZ543	2CPX047259R9999	-	
		5	1	RZ553	2CPX047260R9999	-	
	425	1	1	RZ514	2CPX047165R9999	-	
		2	1	RZ524	2CPX047166R9999	-	
		3	1	RZ534	2CPX047167R9999	-	
		4	1	RZ544	2CPX047168R9999	-	
		5	1	RZ554	2CPX047169R9999	-	
	625	1	1	RZ516	2CPX047170R9999	-	
		2	1	RZ526	2CPX047171R9999	-	
		3	1	RZ536	2CPX047172R9999	-	
		4	1	RZ546	2CPX047173R9999	-	
		5	1	RZ556	2CPX047174R9999	-	

> Flange see starting from page 20

* Spare part is included in the scope of delivery

* Only in conjunction with the factory-installed meter and distributor fields, combination kits or CombiLine modules

TriLine C switchgear cabinets

Side panels and accessories

Article		Piece	Type	Item number
RSW84P2	**Side panels** 2 pieces, color RAL 7035			
	12 GU, OH 8			
	Cabinet depth 325 mm	2	RSW83P2	2CPX045820R9999
	Cabinet depth 425 mm	2	RSW84P2	2CPX045821R9999
	Cabinet depth 625 mm	2	RSW86P2	2CPX045822R9999
	14 GU, OH 10			
	Cabinet depth 325 mm	2	RSW103P2	2CPX045824R9999
	Cabinet depth 425 mm	2	RSW104P2	2CPX045825R9999
	Cabinet depth 625 mm	2	RSW106P2	2CPX045826R9999
RZ33	**Connection set, IP40** For series connection, with sealing tape (8 x 8 x 6000 mm)	1	RZ33	2CPX045997R9999
RZ504	**Connection set, IP54** For series connection with sealing tape and sealing profile			
	Cabinet depth 325 mm	1	RZ502	2CPX047261R9999
	Cabinet depth 425 mm	1	RZ504	2CPX047175R9999
	Cabinet depth 625 mm	1	RZ505	2CPX047176R9999
RZ11P4	**Transport lugs** For crane handling	4	RZ11P4	2CPX045995R9999
RZ32P4	**External mounting brackets** For securing cabinets to the wall	2	RZ32P2	2CPX045996R9999
RZ36	**Earthing sets**			
	For doors, rear panels, side panels and top panels	1	RZ36	2CPX046013R9999
	For standard doors with a door opening angle of 180°	1	RZ55	2CPX046166R9999
	Fixing screws			
RZ12P20	**Pan head screw** For cross members and profile rails			
	M6 x 10 mm (Torx T30)	20	RZ12P20	2CPX046000R9999
		500	RZ12P500	2CPX046001R9999
	M6 x 16 mm (Torx T30)	20	RZ15P20	2CPX046004R9999
RZ13P20	**Countersunk screw** For rear panel and side panels M6 x 12 mm (Torx T30) For mounting busbar supports	20	RZ13P20	2CPX046002R9999
RZ14P20	**Pan head thin sheet screw** For hinge fastening M6 x 14 mm (Torx T30)	20	RZ14P20	2CPX046003R9999

TriLine C switchgear cabinets

Partition walls, diagram pockets and accessories

Article		Piece	Type	Item number
RTW831	**Cabinet-cabinet partition** For mounting between two cabinets, galvanized sheet steel, 1 mm (order connection set RZ147 separately)			
	12 GU, OH 8			
	Cabinet depth 325 mm	1	RTW831	2CPX046231R9999
	Cabinet depth 425 mm	1	RTW841	2CPX046232R9999
	Cabinet depth 625 mm	1	RTW861	2CPX046233R9999
	14 GU, OH 10			
	Cabinet depth 325 mm	1	RTW1031	2CPX046235R9999
	Cabinet depth 425 mm	1	RTW1041	2CPX046236R9999
	Cabinet depth 625 mm	1	RTW1061	2CPX046237R9999
RZ147	**Connection set, IP40** For series connection when installing partitions, with sealing strip (8 x 8 x 6000 mm)	1	RZ147	2CPX046230R9999
 RZ506	**Connection set, IP54** For series connection when installing partitions with sealing strip and sealing profile			
	Cabinet depth 325 mm	1	RZ503	2CPX047262R9999
	Cabinet depth 425 mm	1	RZ506	2CPX047177R9999
	Cabinet depth 625 mm	1	RZ507	2CPX047178R9999
	Diagram pockets			
ZA6	**DIN A4** Self-adhesive, with transparent cover and reinforced spine	1	ZA6	2CPX038227R9999
		10	ZA6P10	2CPX062380R9999
ZA13	**DIN A4** Self-adhesive	1	ZA13	2CPX038233R9999
		10	ZA13P10	2CPX062381R9999
ZA5	**DIN A5** Self-adhesive	1	ZA5	2CPX038228R9999
		10	ZA5P10	2CPX062382R9999
ZA123	**Diagram pocket holder**			
	For diagram pocket ZA13, for screwing onto the door strengthening profiles	1	ZA123	2CPX038471R9999
	For diagram pocket ZA5, for screwing onto the door strengthening profiles	1	ZA125	2CPX038472R9999

TriLine C switchgear cabinets

Mounting frame holders, mounting plates and accessories

Article		Piece	Type	Item number
RZ1P4	**WR Mounting frame holder** Required when installing WR mounting plates, WR mounting frames or modules on WR mounting frames; when installing two mounting plates, WR mounting frames or two WR mounting frames with modules next to each other, also order WR Cross member RZT			
	WR mounting frame bracket	4	RZ1P4	2CPX045950R9999
	WR mounting frame bracket, built into the cabinet*	4	RZ1P4A	2CPX023978R9999
RZT6P2	**WR Cross member** Required when installing two mounting plates, WR mounting frames or WR mounting frames with modules next to each other			
	Cabinet depth 325 mm	2	RZT3P2	2CPX045952R9999
	Cabinet depth 325 mm, built into the cabinet*	2	RZT3P2A	2CPX023979R9999
	Cabinet depth 425 mm	2	RZT4P2	2CPX045953R9999
	Cabinet depth 425 mm, built into the cabinet*	2	RZT4P2A	2CPX023980R9999
	Cabinet depth 625 mm	2	RZT6P2	2CPX045954R9999
	Cabinet depth 625 mm, built into the cabinet*	2	RZT6P2A	2CPX023981R9999
RM38	**Mounting plate** 2 mm galvanized sheet steel, when installing the mounting plate completely at the rear of the cabinet, order RZ48 mounting bracket (RZ1P4 is not required for this installation), max. load capacity of the mounting plates 200 kg			
	12 GU, OH 8			
	1-panel wide	1	RM18	2CPX045909R9999
	2-panel wide	1	RM28	2CPX045910R9999
	3-panel wide	1	RM38	2CPX045911R9999
	4-panel wide	1	RM48	2CPX045912R9999
	5-panel width = RM28+RM38		-	-
	14 GU, OH 10			
	1-panel wide	1	RM110	2CPX045913R9999
	2-panel wide	1	RM210	2CPX045914R9999
	3-panel wide	1	RM310	2CPX045915R9999
	4-panel wide	1	RM410	2CPX045916R9999
	5-panel width = RM210+RM310		-	-
RM8	**Mounting plates Intermediate part** When installing mounting plates across several cabinets next to each other			
	12 GU, OH 8	1	RM8	2CPX045918R9999
	14 GU, OH 10	1	RM10	2CPX045919R9999
RZ48	**Mounting bracket** Required to install mounting plates at the rear of the cabinet	1	RZ48	2CPX046100R9999

* Only in conjunction with the factory-installed meter and distributor fields, combination kits or CombiLine modules

TriLine C switchgear cabinets

Touch guard, mounting frames and installation sets

Article		Piece	Type	Item number
 RB38	**Touch guard** Required when installing distribution panels/combination sets, meter panels or modules			
	12 GU, OH 8			
	1-panel wide	1	RB18	2CPX045930R9999
	2-panel wide	1	RB28	2CPX045931R9999
	3-panel wide	1	RB38	2CPX045932R9999
	4-panel wide	1	RB48	2CPX045933R9999
	5-panel wide	1	RB58	2CPX045934R9999
	14 GU, OH 10			
	1-panel wide	1	RB110	2CPX045935R9999
	2-panel wide	1	RB210	2CPX045936R9999
	3-panel wide	1	RB310	2CPX045937R9999
	4-panel wide	1	RB410	2CPX045938R9999
	5-panel wide	1	RB510	2CPX045939R9999
 WR38	**Mounting frame** Required for free assembly on the WR mounting frame Required when installing EDF installation set WNF Required when assembling modules on the WR mounting frame			
	12 GU, OH 8			
	1-panel wide	1	WR18	2CPX034801R9999
	2-panel wide	1	WR28	2CPX034802R9999
	3-panel wide	1	WR38	2CPX034803R9999
	4-panel wide	1	WR48	2CPX034804R9999
	5-panel width = WR28+WR38		-	-
	14 GU, OH 10			
	1-panel wide	1	WR110	2CPX045234R9999
	2-panel wide	1	WR210	2CPX045235R9999
	3-panel wide	1	WR310	2CPX045236R9999
	4-panel wide	1	WR410	2CPX045237R9999
	5-panel width = WR210+WR310		-	-
WNF3	**EDF installation set** Required for installation of distribution panels, combination sets, meter panels or modules on EDF mounting frame on the WR mounting frame			
	1-panel wide	1	WNF1	2CPX045961R9999
	2-panel wide	1	WNF2	2CPX045962R9999
	3-panel wide	1	WNF3	2CPX045963R9999
	4-panel wide	1	WNF4	2CPX045964R9999
	5-panel width = WNF2+WNF3		-	-
RNF3	Required for installation with universal cross members and profiles and for installing distribution panels, combination sets, meter panels or modules on EDFmounting frame			
	1-panel wide	1	RNF1	2CPX045956R9999
	2-panel wide	1	RNF2	2CPX045957R9999
	3-panel wide	1	RNF3	2CPX045958R9999
	4-panel wide	1	RNF4	2CPX045959R9999
	5-panel wide	1	RNF5	2CPX045960R9999

TriLine C switchgear cabinets

Lock replacement parts

Article		Piece	Type	Item number
TZ507 TZ508	**Key plates for actuating pins**			
	For actuating pin 3 mm (standard)* and 5 mm (similar to RAL 9005)	1	TZ507	2CPX010491R9999
	For triangular and square actuating pin and Daimler-Benz insert	1	TZ508	2CPX010492R9999
ZH130 ZH132 ZH134 ZH137	**Actuating pins**			
	Double-bit 3 mm*	1	ZH130	2CPX060490R9999
	Double-bit 5 mm	1	ZH131	2CPX060491R9999
	Triangular 7 mm	1	ZH132	2CPX060492R9999
	Triangular 8 mm	1	ZH133	2CPX060493R9999
	Rectangular 6 mm	1	ZH134	2CPX060494R9999
	Rectangular 7 mm	1	ZH135	2CPX060495R9999
	Rectangular 8 mm	1	ZH136	2CPX060496R9999
	Daimler-Benz	1	ZH137	2CPX060497R9999
TZ503 TZ504	**L-handle**			
	With key plate, with lock (lock EK333)	1	TZ503	2CPX010487R9999
	With key plate, without lock	1	TZ504	2CPX010488R9999
TZ505 TZ506	**T-handle**			
	With key plate, with lock (lock EK333)	1	TZ505	2CPX010489R9999
	With key plate, without lock	1	TZ506	2CPX010490R9999
TZ510	**Swivel handle** For profile half cylinder 40 mm (30/10) with sealing cap	1	TZ510	2CPX010494R9999
ZH142	**Blind insert** Instead of a profile half cylinder for the TZ510 swivel handle	1	ZH142	2CPX060502R9999
ZH91	**Universal key**			
	Double-bit 3 mm/5 mm Triangular 8 mm, square 6 mm/8 mm	1	ZH91	2CPX066091R9999
	Double-bit 3 mm*	1	ZH160	2CPX060660R9999
	Double-bit 5 mm	1	ZH161	2CPX060661R9999
	Triangular 7 mm	1	ZH157	2CPX060657R9999
	Triangular 8 mm	1	ZH158	2CPX060658R9999
	Rectangular 6 mm	1	ZH162	2CPX060662R9999
	Rectangular 7 mm	1	ZH163	2CPX060663R9999
	Rectangular 8 mm	1	ZH164	2CPX060664R9999
	Daimler-Benz	1	ZH165	2CPX060665R9999

ZH160 ZH157

ZH162 ZH165

* Spare part is included in the scope of delivery

TriLine C switchgear cabinets

Door replacement parts

Article		Piece	Type	Item number
RZ8P4	**Hinge*** Door opening angle 135° with fixing material	4	RZ8P4	2CPX045992R9999
RZ9P4	**Hinge for standard doors** Door opening angle 180° (when using TZ510, for combined cabinets the hinging must alternate left and right) with fastening material (RZ9P4 is needed two times for 4-panel and 5-panel-wide cabinets)	4	RZ9P4	2CPX045993R9999
RZ34P4	**Hinge pins*** Can also be used for connecting cabinets during factory assembly	4	RZ34P4	2CPX046009R9999
ZH150	**Espagnolette guide*** For lock rods	1	ZH150	2CPX060650R9999
RZ10P2	**Rubber seal*** For double doors	2	RZ10P2	2CPX045994R9999
 RZ18 RZ17	**Espagnolette guide*** with lock body			
	1 up to 3 PW			
	GU 12 = 1800 mm	1	RZ18	2CPX047179R9999
	GU 14 = 2000 mm	1	RZ20	2CPX047180R9999
	4 and 5 PW			
	GU 12 = 1800 mm	1	RZ17	2CPX047193R9999
	GU 14 = 2000 mm	1	RZ19	2CPX047194R9999

* Spare part is included in the scope of delivery

TriLine C switchgear cabinets

Flanges and cable sleeves

Article		Piece	Type	Item number
	Membrane flange Material plastic			
 TZ101	**With 52 cable glands** for cable diameters of 2 x 6 - 32.5 mm, 2 x 6 - 25 mm, 4 x 6 - 19 mm, 10 x 6 - 15 mm, 2 x 6 - 12 mm, 31 x 6 - 11 mm, 1 x 6 - 7 mm	1	TZ101	2CPX010450R9999
		10	TZ101P10	2CPX010451R9999
		100	TZ101P100	2CPX010826R9999
 TZ110	**With 8 cable glands** For cable diameters from 8 x 13 to 34 mm	1	TZ110	2CPX010850R9999
		10	TZ110P10	2CPX010934R9999
 TZ111	**With 12 cable glands including 1 cable sleeve** For cable diameters from 1 x 14 to 54 mm, 3 x 13 to 34 mm, 3 x 13 to 26.5 mm, 4 x 5 to 21 mm, 1 x 6 to 15 mm	1	TZ111	2CPX010851R9999
		10	TZ111P10	2CPX010935R9999
	Flange for M-fittings Material plastic			
 TZ102	**1 x M63/M50, 2 x M32/M20, 5 x M25, 5 x M20**	1	TZ102	2CPX010452R9999
		10	TZ102P10	2CPX010453R9999
 TZ103	**4 x M20/M25, 18 x M20**	1	TZ103	2CPX010454R9999
		10	TZ103P10	2CPX010455R9999
	Flange with cable sleeves Material plastic			
 TZ112	**With 1 cable sleeve** For cable diameters from 1 x 14 to 68 mm	1	TZ112	2CPX010852R9999
 TZ104	**With 2 cable sleeves** For cable diameters from 2 x 14 to 68 mm	1	TZ104	2CPX010456R9999
		10	TZ104P10	2CPX010932R9999
 TZ105	**With 3 cable sleeves** For cable diameters from 3 x 14 to 54 mm	1	TZ105	2CPX010457R9999
		10	TZ105P10	2CPX010933R9999
	Closing flange			
 TZ107	Material plastic	1	TZ107	2CPX010460R9999
		10	TZ107P10	2CPX010461R9999
 TZ106	**Material sheet steel** For earthed cabinets	1	TZ106	2CPX010458R9999
		10	TZ106P10	2CPX010459R9999

TriLine C switchgear cabinets

Flanges and cable sleeves

Article		Piece	Type	Item number
 RZF10 RZF9	**Cable sleeves** Made of PVC for material thickness 2 - 3 mm			
	For cable diameters 14 - 54 mm Hole diameter 58 mm	1	RZF9	2CPX046612R9999
	For cable diameters 14 - 68 mm Hole diameter 75 mm	1	RZF10	2CPX046613R9999
RZ65	**Foam rubber sinus flange** For bottom plates RB... F			
	2-panel wide	1	RZ65	2CPX046225R9999
	3-panel wide	1	RZ66	2CPX046226R9999
	4-panel width (2-part 493 mm + 493 mm)	1	ZW57	2CPX060122R9999
	5-panel width (2-part 493 mm + 743 mm)	1	ZW58	2CPX060123R9999
RZF19 RZF18	**Cable sleeves with strain relief** For material thickness 2 - 3 mm			
	For cable diameters 10 - 34 mm Hole diameter 40.5 mm	1	RZF18	2CPX046900R9999
	For cable diameters 18 - 54 mm Hole diameter 63.5 mm	1	RZF19	2CPX046901R9999

TriLine C switchgear cabinets

System parts for installation sets

Article		Piece	Type	Item number
	System parts for EDF installation set WNF			
ZW61LR	**Brackets for support rails** 1 x left and 1 x right	1	ZW61LR	2CPX062455R9999
	Support rail top or bottom			
ZW50	1-panel wide	1	ZW50	2CPX039459R9999
	2-panel wide	1	ZW46	2CPX039446R9999
	3-panel wide	1	ZW47	2CPX039447R9999
	4-panel wide	1	ZW48	2CPX039448R9999
	Center support rail			
ZW41	1-panel wide	1	ZW41	2CPX039441R9999
	2-panel wide	1	ZW42	2CPX039442R9999
	3-panel wide	1	ZW43	2CPX039443R9999
	4-panel wide	1	ZW44	2CPX039444R9999
	System parts for EDF installation set RNF			
	Support rail top or bottom			
RZ21	1-panel wide	1	RZ21	2CPX045966R9999
	2-panel wide	1	RZ22	2CPX045967R9999
	3-panel wide	1	RZ23	2CPX045968R9999
	4-panel wide	1	RZ24	2CPX045969R9999
	5-panel wide	1	RZ25	2CPX045970R9999
RZ31P2	**Bracket** For center support rail	2	RZ31P2	2CPX045987R9999
	Center support rail			
RZ26	1-panel wide	1	RZ26	2CPX045971R9999
	2-panel wide	1	RZ27	2CPX045972R9999
	3-panel wide	1	RZ28	2CPX045973R9999
	4-panel wide	1	RZ29	2CPX045974R9999
	5-panel wide	1	RZ30	2CPX045975R9999

TriLine C switchgear cabinets

Universal cross members and accessories

Article		Piece	Type	Item number
	Universal cross members for installation between cabinet profiles*			
RZUT3	**Depth Universal cross member** 65 x 30 mm, 25 mm grid space for knock-in nut M6			
	Cabinet depth 325 mm	1	RZUT3	2CPX045976R9999
	Cabinet depth 425 mm	1	RZUT4	2CPX045977R9999
	Cabinet depth 625 mm	1	RZUT6	2CPX045978R9999
	Width Universal cross member 65 x 30 mm, 25 mm grid space for knock-in nut M6			
	Panel width 1	1	RZUB1	2CPX045980R9999
	Panel width 2	1	RZUB2	2CPX045981R9999
	Panel width 3	1	RZUB3	2CPX045982R9999
	Panel width 4	1	RZUB4	2CPX045983R9999
	Panel width 5	1	RZUB5	2CPX045984R9999
	Height Universal cross member 65 x 30 mm, 25 mm grid space for knock-in nut M6			
	Cabinet height 8, 12 GU	1	RZUH8	2CPX045985R9999
	Cabinet height 10, 14 GU	1	RZUH10	2CPX045986R9999
RZULT3	**Depth Universal cross member** 50 x 25 mm, with holes, 12.5 mm grid space			
	Cabinet depth 325 mm	1	RZULT3	2CPX046054R9999
	Cabinet depth 425 mm	1	RZULT4	2CPX046055R9999
	Cabinet depth 625 mm	1	RZULT6	2CPX046056R9999
	Width Universal cross member 50 x 25 mm, with holes, 12.5 mm grid space			
	Panel width 1	1	RZULB1	2CPX046058R9999
	Panel width 2	1	RZULB2	2CPX046059R9999
	Panel width 3	1	RZULB3	2CPX046060R9999
	Panel width 4	1	RZULB4	2CPX046061R9999
	Panel width 5	1	RZULB5	2CPX046062R9999
	Height Universal cross member 50 x 25 mm, with holes, 12.5 mm grid space			
	Cabinet height 8, 12 GU	1	RZULH8	2CPX046063R9999
	Cabinet height 10, 14 GU	1	RZULH10	2CPX046064R9999
RZ6P2	**Cross member holder** For universal cross member 65 x 30 mm	2	RZ6P2	2CPX045990R9999
		20	RZ6P20	2CPX046011R9999
RZ12P20	**Pan head screw** For fastening cross members to the cabinet profiles M6 x 10 mm (Torx 30)	20	RZ12P20	2CPX046000R9999
		500	RZ12P500	2CPX046001R9999
RZ37P20	**Knock-in nut M6** For universal cross member 65 x 30 and on the cabinet profiles	20	RZ37P20	2CPX046014R9999

* Installation options for universal cross members see technical data starting page 28

TriLine C switchgear cabinets

Mounting brackets and accessories

Article		Piece	Type	Item number
RZ7P2	**Mounting bracket for universal cross members 65 x 30 mm and 50 x 25 mm** For mounting universal cross members between the cabinet profiles	2	RZ7P2	2CPX045991R9999
		20	RZ7P20	2CPX046012R9999
RZ39P2	**Mounting bracket for universal cross members 50 x 25 mm** For mounting at 90°	2	RZ39P2	2CPX046017R9999
		20	RZ39P20	2CPX046018R9999
RZ40P2	**Mounting bracket for universal cross members 50 x 25 mm** For flat mounting	2	RZ40P2	2CPX046019R9999
		20	RZ40P20	2CPX046020R9999
RZ41P2	**Mounting bracket for universal cross members 65 x 30 mm and 50 x 25 mm** Height-adjustable, for mounting universal cross members between the cabinet profiles	2	RZ41P2	2CPX046065R9999
		20	RZ41P20	2CPX046066R9999
	Accessories for universal cross members 50 x 25 mm			
RZ12P20	**Pan head screw** For fastening cross members to the cabinet profiles M6 x 10 mm (Torx 30)	20	RZ12P20	2CPX046000R9999
		500	RZ12P500	2CPX046001R9999
	Sliding nuts			
ZX661P10	M5 10 pieces	10	ZX662P10	2CPX046249R9999
	M6 10 pieces	10	ZX658P10	2CPX046095R9999
	M8 10 pieces	10	ZX659P10	2CPX046096R9999
	M10 10 pieces	10	ZX660P10	2CPX046097R9999
	M12 10 pieces	10	ZX661P10	2CPX046098R9999

TriLine C switchgear cabinets

Profile rails

Article		Piece	Type	Item number
RZB11	**WidthProfile rail no. 1** 25 x 14 mm for mounting between cabinet profiles			
	Panel width 1	1	RZB11	2CPX046021R9999
	Panel width 2	1	RZB21	2CPX046022R9999
	Panel width 3	1	RZB31	2CPX046023R9999
	Panel width 4	1	RZB41	2CPX046024R9999
	Panel width 5	1	RZB51	2CPX046025R9999
RZBA11	**Width Profile rail no. 1** 25 x 14 mm for mounting on top of cabinet profiles			
	Panel width 1	1	RZBA11	2CPX046102R9999
	Panel width 2	1	RZBA21	2CPX046103R9999
	Panel width 3	1	RZBA31	2CPX046104R9999
	Panel width 4	1	RZBA41	2CPX046105R9999
	Panel width 5	1	RZBA51	2CPX046106R9999
 RZT33	**Depth Profile rail no. 3** 32 x 25 mm for mounting between cabinet profiles			
	Cabinet depth 325 mm	1	RZT33	2CPX046026R9999
	Cabinet depth 425 mm	1	RZT43	2CPX046027R9999
	Cabinet depth 625 mm	1	RZT63	2CPX046028R9999
 RZB13	**Width Profile rail no. 3** 32 x 25 mm for mounting between cabinet profiles			
	Panel width 1	1	RZB13	2CPX046030R9999
	Panel width 2	1	RZB23	2CPX046031R9999
	Panel width 3	1	RZB33	2CPX046032R9999
	Panel width 4	1	RZB43	2CPX046033R9999
	Panel width 5	1	RZB53	2CPX046034R9999
 RZBA13	**Width Profile rail no. 3** 32 x 25 mm for mounting on top of cabinet profiles			
	Panel width 1	1	RZBA13	2CPX046107R9999
	Panel width 2	1	RZBA23	2CPX046108R9999
	Panel width 3	1	RZBA33	2CPX046109R9999
	Panel width 4	1	RZBA43	2CPX046110R9999
	Panel width 5	1	RZBA53	2CPX046111R9999
RZT310	**Depth Profile rail no. 10** 35 x 19 mm for mounting between cabinet profiles			
	Cabinet depth 325 mm	1	RZT310	2CPX046035R9999
	Cabinet depth 425 mm	1	RZT410	2CPX046036R9999
	Cabinet depth 625 mm	1	RZT610	2CPX046037R9999
RZB110	**Width Profile rail no. 10** 35 x 19 mm for mounting between cabinet profiles			
	Panel width 1	1	RZB110	2CPX046039R9999
	Panel width 2	1	RZB210	2CPX046040R9999
	Panel width 3	1	RZB310	2CPX046041R9999
	Panel width 4	1	RZB410	2CPX046042R9999
	Panel width 5	1	RZB510	2CPX046043R9999

> Installation options for profile rails see technical data starting page 28

TriLine C switchgear cabinets

Profile rails

Article		Piece	Type	Item number
RZTA310	**Depth Profile rail no. 10** 35 x 19 mm for mounting on top of cabinet profiles			
	Cabinet depth 325 mm	1	RZTA310	2CPX046045R9999
	Cabinet depth 425 mm	1	RZTA410	2CPX046046R9999
	Cabinet depth 625 mm	1	RZTA610	2CPX046047R9999
RZBA110	**Width Profile rail no. 10** 35 x 19 mm for mounting on top of cabinet profiles			
	Panel width 1	1	RZBA110	2CPX046049R9999
	Panel width 2	1	RZBA210	2CPX046050R9999
	Panel width 3	1	RZBA310	2CPX046051R9999
	Panel width 4	1	RZBA410	2CPX046052R9999
	Panel width 5	1	RZBA510	2CPX046053R9999
	Profile rails by the meter The delivery length is 6000 mm.			
XZ301	**Profile rail no. 1** 25 x 14 mm	8	XZ301P8	2CPX060601R9999
 XZ302	**Profile rail no. 2** 25 x 20 mm	6	XZ302P6	2CPX060602R9999
 XZ303	**Profile rail no. 3** 32 x 25 mm	4	XZ303P4	2CPX060603R9999
XZ310	**Profile rail no. 10** 35 x 19 mm	3	XZ310P3	2CPX060610R9999

> Installation options for profile rails see technical data starting page 28

TriLine C switchgear cabinets

Accessories for profile rails

Article		Piece	Type	Item number
RZ7P2	**Mounting bracket** For mounting profile rails between cabinet profiles	2	RZ7P2	2CPX045991R9999
		20	RZ7P20	2CPX046012R9999
RZ12P20	**Pan head screw** For fastening profile rails to the cabinet profiles M6 x 10 mm (Torx 30)	20	RZ12P20	2CPX046000R9999
		500	RZ12P500	2CPX046001R9999
ZX221P2	**Mounting bracket light** For profile no. 1, fixing hole 8.5 mm	2	ZX221P2	2CPX062492R9999
		40	ZX221P40	2CPX062557R9999
ZX222P2	**Mounting bracket heavy** For profile no. 1 and 3, fixing hole 8.5 mm	2	ZX222P2	2CPX062493R9999
		40	ZX222P40	2CPX062558R9999
ZX226P10	**Sliding nuts for profile no. 1**			
	20 x 20 x 4 mm - M3	10	ZX226P10	2CPX062494R9999
	20 x 20 x 4 mm - M4	10	ZX227P10	2CPX062495R9999
	20 x 20 x 4 mm - M5	10	ZX228P10	2CPX062496R9999
	20 x 20 x 4 mm - M6	10	ZX229P10	2CPX062497R9999
	20 x 20 x 4 mm - M8	10	ZX230P10	2CPX062498R9999
ZX231P10	**Sliding nuts for profile no. 3**			
	25 x 25 x 8 mm - M5	10	ZX235P10	2CPX062639R9999
	25 x 25 x 8 mm - M6	10	ZX231P10	2CPX062499R9999
	25 x 25 x 8 mm - M8	10	ZX232P10	2CPX062500R9999
	25 x 25 x 10 mm - M10	10	ZX233P10	2CPX062501R9999
	25 x 25 x 10 mm - M12	10	ZX234P10	2CPX062502R9999
ZX248P10	**Insert nuts for profile no. 1**			
	20 x 14 x 4 mm - M5	10	ZX248P10	2CPX062509R9999
	20 x 14 x 4 mm - M6	10	ZX249P10	2CPX062510R9999
	20 x 14 x 4 mm - M8	10	ZX250P10	2CPX062511R9999
ZX252P10	**Insert nuts for profile no. 3**			
	24 X 16 x 4 mm - M6	10	ZX252P10	2CPX062512R9999
	25 X 16 x 6 mm - M8	10	ZX254P10	2CPX062513R9999
	25 X 16 x 6 mm - M10	10	ZX255P10	2CPX062514R9999
ZX262P10	**Hexagon socket cap screws**			
	M8 x 12 mm	10	ZX262P10	2CPX062519R9999
	M8 x 16 mm	10	ZX263P10	2CPX062520R9999
	M8 x 20 mm	10	ZX264P10	2CPX062521R9999
	M8 x 30 mm	10	ZX265P10	2CPX062522R9999

Notes

TriLine C switchgear cabinets

Dimensions, power dissipations and weights TriLine R...T3, R...T4, R...T6

Type	H	W	W1	W2	D	D1	Power dissipation in watts at overtemperature △t 20K	Weight in kg
R112T3	1913	374	300	364	325	250	95.90	56.80
R212T3	1913	624	550	614	325	250	151.30	72.80
R312T3	1913	874	800	864	325	250	197.80	89.20
R412T3	1913	1124	1050	1114	325	250	239.60	110.60
R512T3	1913	1374	1300	1364	325	250	280.60	127.20
R112T4	1913	374	300	364	425	350	108.30	59.20
R212T4	1913	624	550	614	425	350	163.10	74.20
R312T4	1913	874	800	864	425	350	204.40	90.60
R412T4	1913	1124	1050	1114	425	350	257.30	113.80
R512T4	1913	1374	1300	1364	425	350	298.40	130.00
R112T6	1913	374	300	364	625	550	153.90	60.30
R212T6	1913	624	550	614	625	550	217.50	77.80
R312T6	1913	874	800	864	625	550	269.00	93.00
R412T6	1913	1124	1050	1114	625	550	318.40	118.20
R512T6	1913	1374	1300	1364	625	550	370.20	135.80

* General note on determining power dissipation: Values according to DIN EN 61439-1 section 10.10.4.2.2;
ambient temperature 35 °C, internal temperature 55 °C;
altitude of installation site ≤ 2000 m above sea level; shape of internal partition = 1; side panels not covered

Type	H	W	W1	W2	D	D1	Power dissipation in watts at overtemperature △t 20K	Weight in kg
R114T3	2213	374	300	364	325	250	116.90	63.20
R214T3	2213	624	550	614	325	250	176.20	81.90
R314T3	2213	874	800	864	325	250	215.60	99.80
R414T3	2213	1124	1050	1114	325	250	251.90	125.30
R514T3	2213	1374	1300	1364	325	250	299.60	142.40
R114T4	2213	374	300	364	425	350	128.80	64.60
R214T4	2213	624	550	614	425	350	187.70	83.00
R314T4	2213	874	800	864	425	350	224.30	100.00
R414T4	2213	1124	1050	1114	425	350	273.60	125.40
R514T4	2213	1374	1300	1364	425	350	320.20	145.20
R114T6	2213	374	300	364	625	550	178.40	66.70
R214T6	2213	624	550	614	625	550	220.10	86.40
R314T6	2213	874	800	864	625	550	285.10	104.20
R414T6	2213	1124	1050	1114	625	550	340.10	131.00
R514T6	2213	1374	1300	1364	625	550	399.60	151.10

* General note on determining power dissipation: Values according to DIN EN 61439-1 section 10.10.4.2.2;
ambient temperature 35 °C, internal temperature 55 °C;
altitude of installation site ≤ 2000 m above sea level; shape of internal partition = 1; side panels not covered

TriLine C switchgear cabinets

Dimensions TriLine R...T3, R...T4, R...T6

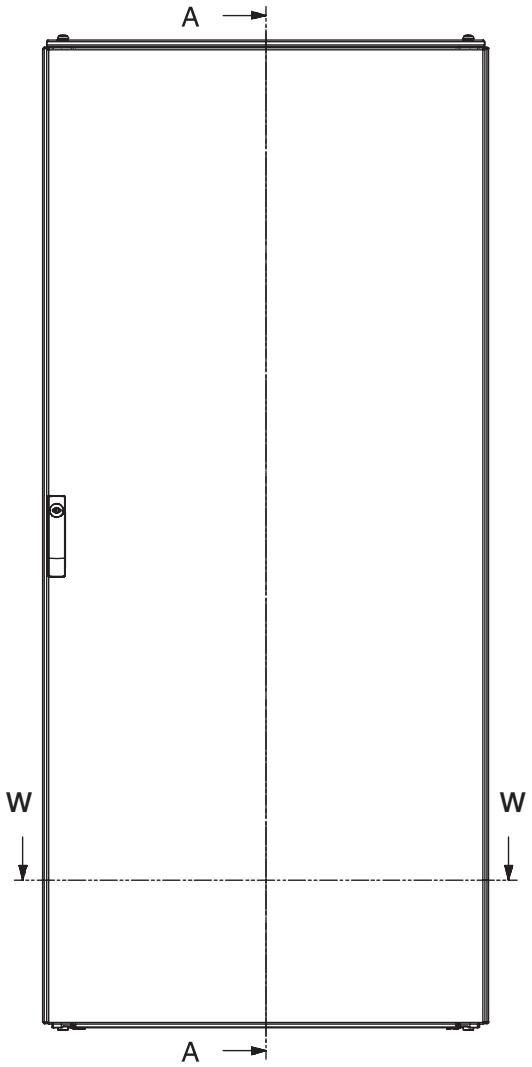

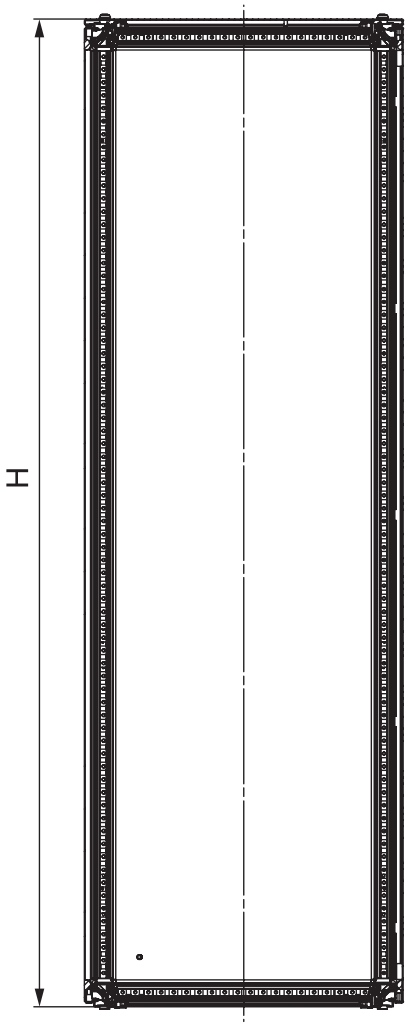

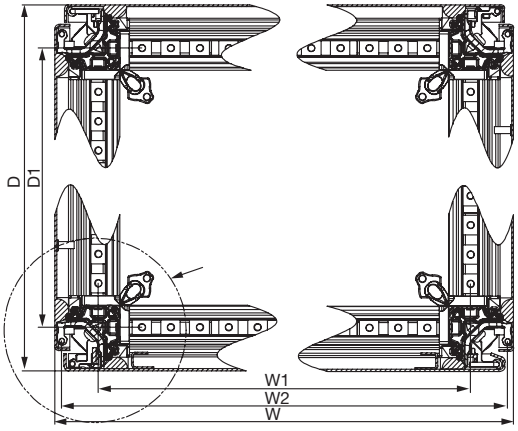

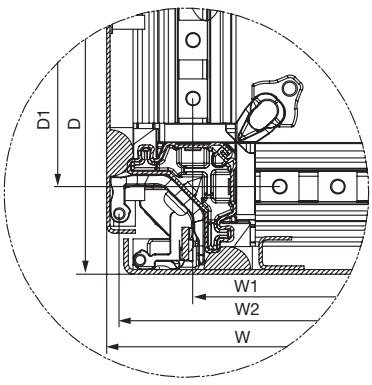

> Dimensions in mm

TriLine C switchgear cabinets

Dimensions, power dissipations and weights, TriLine R...T3B, R...T4B, R...T6B

Type	H	W	D	H1	W1	D1	H2	W2	D2	Power dissipation in watts at overtemperature △t 20K	Weight in kg
R112T3B	1906	364	306	1850	300	250	1813	263	213	95.90	40.80
R212T3B	1906	614	306	1850	550	250	1813	513	213	151.30	48.40
R312T3B	1906	864	306	1850	800	250	1813	763	213	197.80	56.20
R412T3B	1906	1114	306	1850	1050	250	1813	1013	213	239.60	64.00
R512T3B	1906	1364	306	1850	1300	250	1813	1263	213	280.60	71.80
R112T4B	1906	364	406	1850	300	350	1813	263	313	108.30	41.80
R212T4B	1906	614	406	1850	550	350	1813	513	313	163.10	49.80
R312T4B	1906	864	406	1850	800	350	1813	763	313	204.40	56.80
R412T4B	1906	1114	406	1850	1050	350	1813	1013	313	257.30	66.00
R512T4B	1906	1364	406	1850	1300	350	1813	1263	313	298.40	72.20
R112T6B	1906	364	606	1850	300	550	1813	263	513	153.90	43.00
R212T6B	1906	614	606	1850	550	550	1813	513	513	217.50	51.20
R312T6B	1906	864	606	1850	800	550	1813	763	513	269.00	57.50
R412T6B	1906	1114	606	1850	1050	550	1813	1013	513	318.40	67.40
R512T6B	1906	1364	606	1850	1300	550	1813	1263	513	370.20	74.40

* General note on determining power dissipation: Values according to DIN EN 61439-1 section 10.10.4.2.2;
ambient temperature 35 °C, internal temperature 55 °C;
altitude of installation site ≤ 2000 m above sea level; shape of internal partition = 1; side panels not covered

Type	H	W	D	H1	W1	D1	H2	W2	D2	Power dissipation in watts at overtemperature △t 20K	Weight in kg
R114T3B	2206	364	306	2150	300	250	2113	263	213	116.90	44.50
R214T3B	2206	614	306	2150	550	250	2113	513	213	176.20	52.80
R314T3B	2206	864	306	2150	800	250	2113	763	213	215.60	61.00
R414T3B	2206	1114	306	2150	1050	250	2113	1013	213	251.90	71.40
R514T3B	2206	1364	306	2150	1300	250	2113	1263	213	299.60	79.20
R114T4B	2206	364	406	2150	300	350	2113	263	313	128.80	45.20
R214T4B	2206	614	406	2150	550	350	2113	513	313	187.70	53.60
R314T4B	2206	864	406	2150	800	350	2113	763	313	224.30	62.20
R414T4B	2206	1114	406	2150	1050	350	2113	1013	313	273.60	72.50
R514T4B	2206	1364	406	2150	1300	350	2113	1263	313	320.20	80.40
R114T6B	2206	364	606	2150	300	550	2113	263	513	178.40	46.60
R214T6B	2206	614	606	2150	550	550	2113	513	513	220.10	55.00
R314T6B	2206	864	606	2150	800	550	2113	763	513	285.10	63.40
R414T6B	2206	1114	606	2150	1050	550	2113	1013	513	340.10	72.90
R514T6B	2206	1364	606	2150	1300	550	2113	1263	513	399.60	81.40

* General note on determining power dissipation: Values according to DIN EN 61439-1 section 10.10.4.2.2;
ambient temperature 35 °C, internal temperature 55 °C;
altitude of installation site ≤ 2000 m above sea level; shape of internal partition = 1; side panels not covered

Overall width of cabinet combination = dimension of individual cabinets
+ 10 mm (5 mm each) for left and right side panels

> Dimensions in mm

TriLine C switchgear cabinets

Dimensions TriLine R...T3B, R...T4B, R...T6B

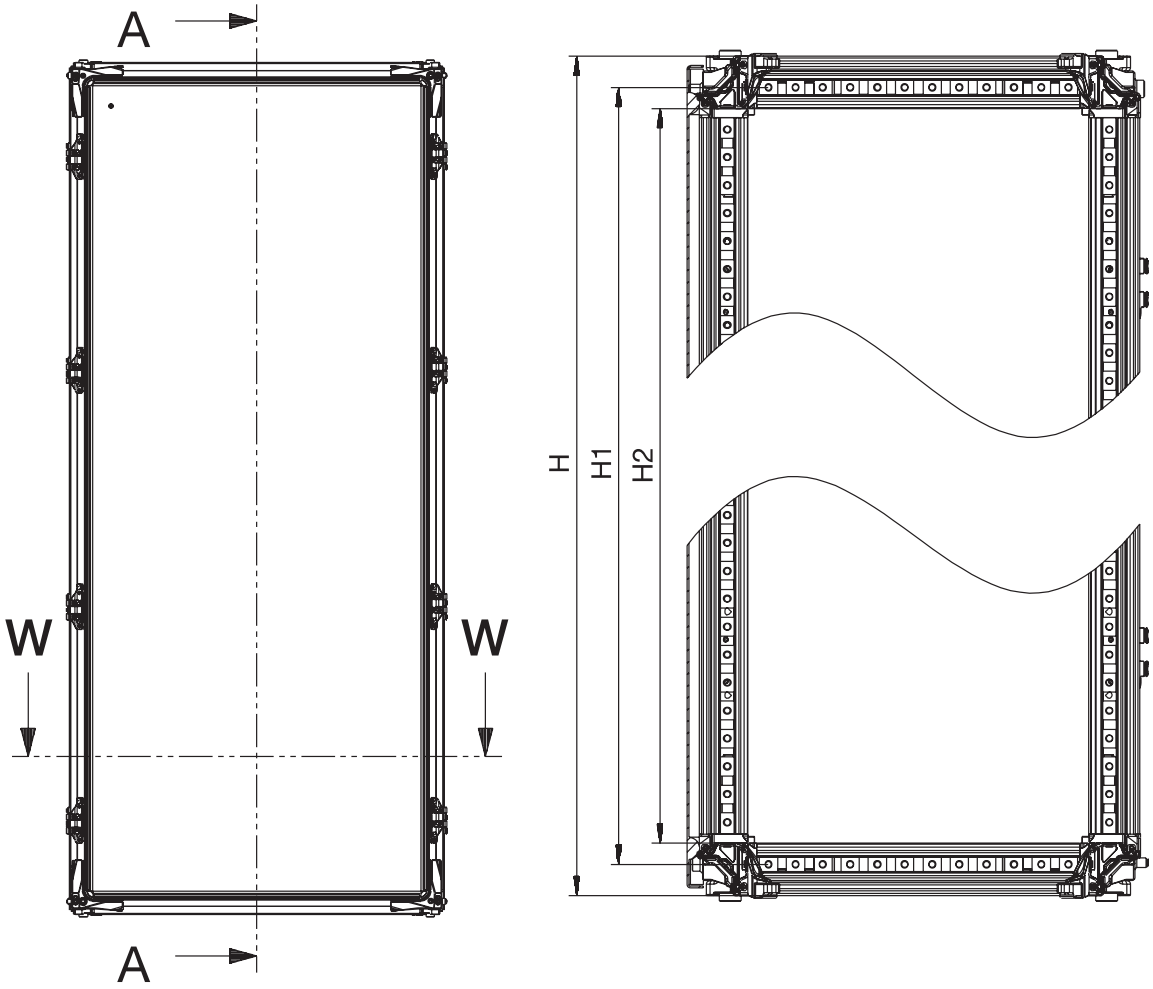

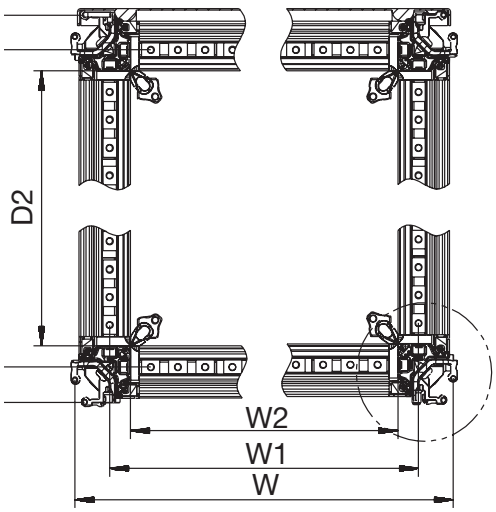

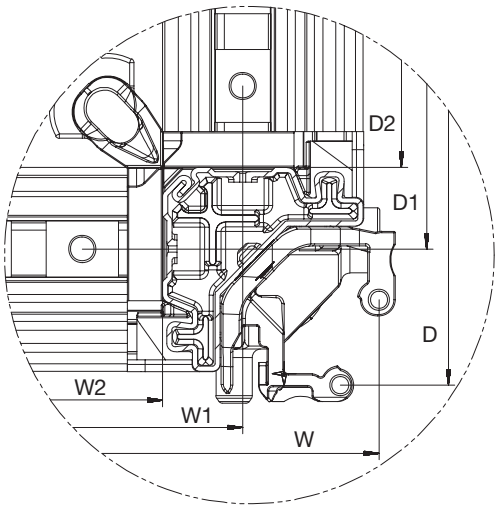

> Dimensions in mm

TriLine C switchgear cabinets

Dimension and weights corner cabinets

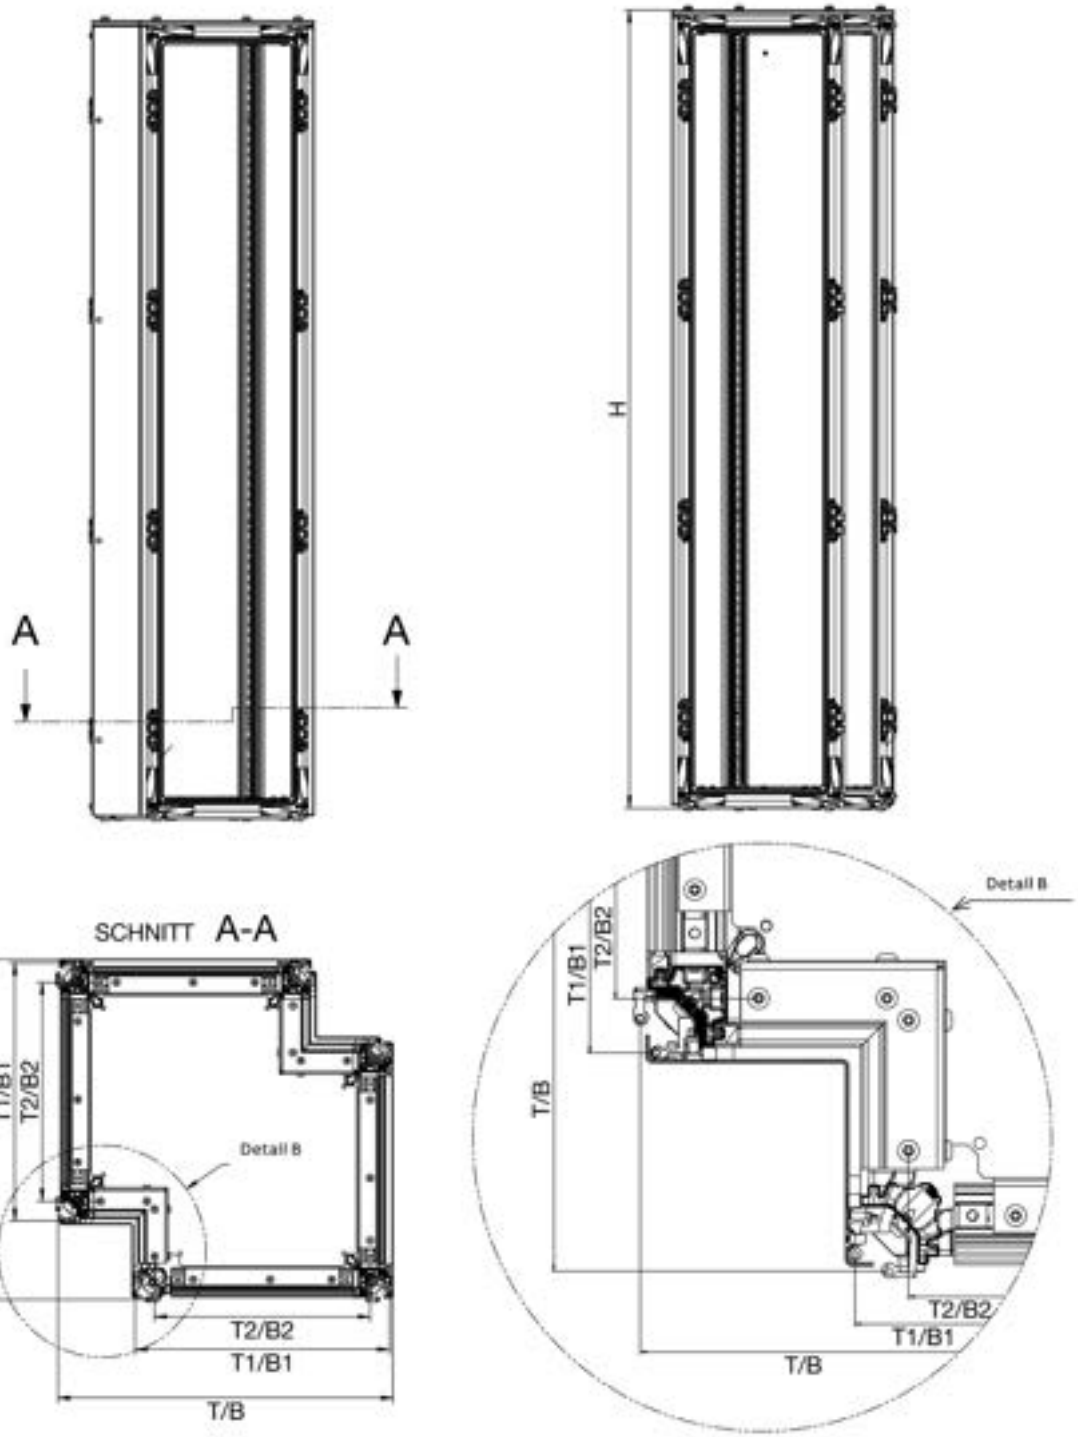

Type	H	T / B	T1 / B1	Weight in kg
RE12T4	1913	544	413	85,96
RE12T6	1913	744	613	94,38
RE14T4	2213	544	413	103,65
RE14T6	2213	744	613	119,77

TriLine C switchgear cabinets

Dimension and weights corner plinths

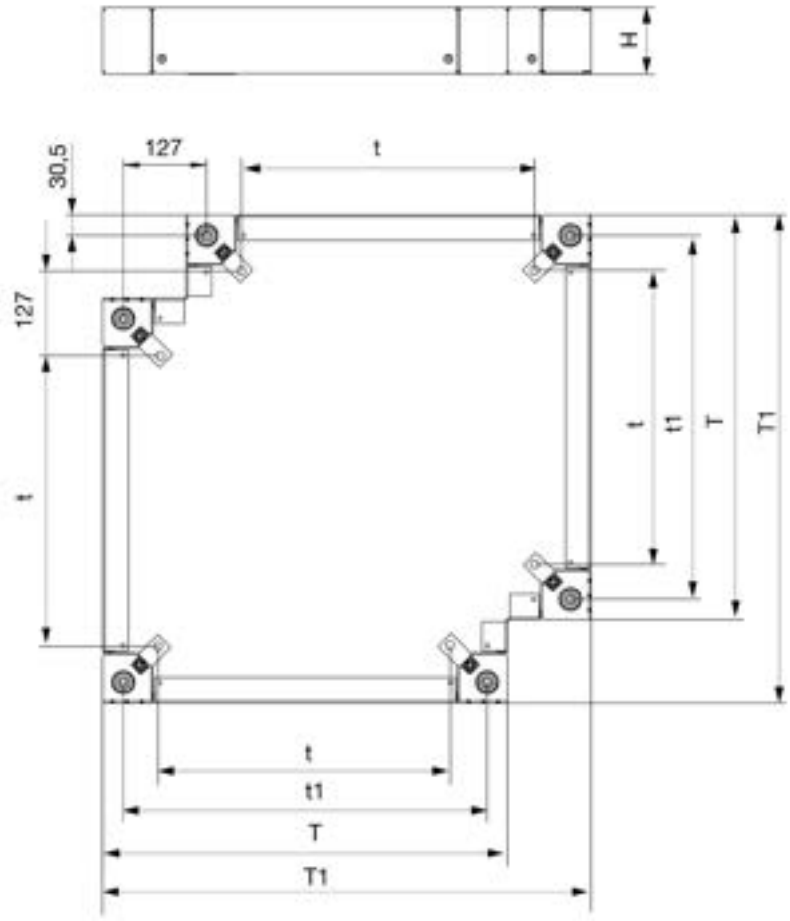

Type	T	T1	t	t1	H	Weight in kg
RZSE T4	406	533	225	345	100	6,08
RZSE T6	606	733	425	545	100	7,37

TriLine C switchgear cabinets

Plinth distance for cabinet combinations

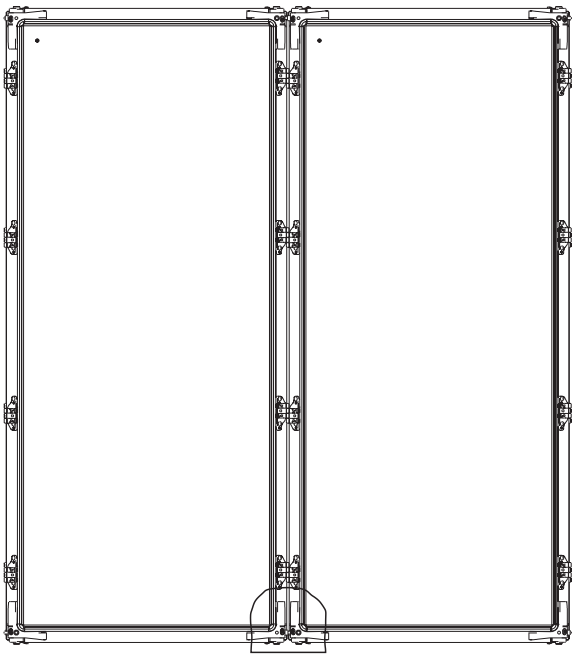

Overall width of cabinet combination
= dimension of individual cabinets + 10 mm (5 mm each)
left and right side panels

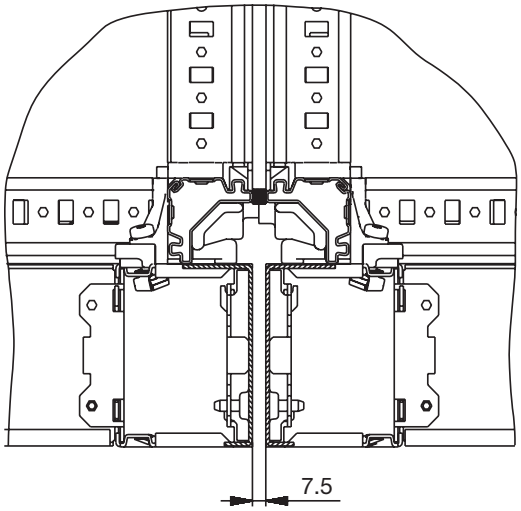

The plinths are positioned next to each other with a distance of 7.5 mm.
Mounting the plinth to the enclosure before attaching it to the floor.

> Dimensions in mm

TriLine C switchgear cabinets

Dimensions and weights of the plinth

The plinth should be installed at a distance of at least 20 mm (rear edge of the plinth) from the wall (due to cabinet protrusion from the back and side panels). The plinths are positioned next to each other with a distance of 7.5 mm (see next page). Mounting the plinth to the enclosure before attaching it to the floor.

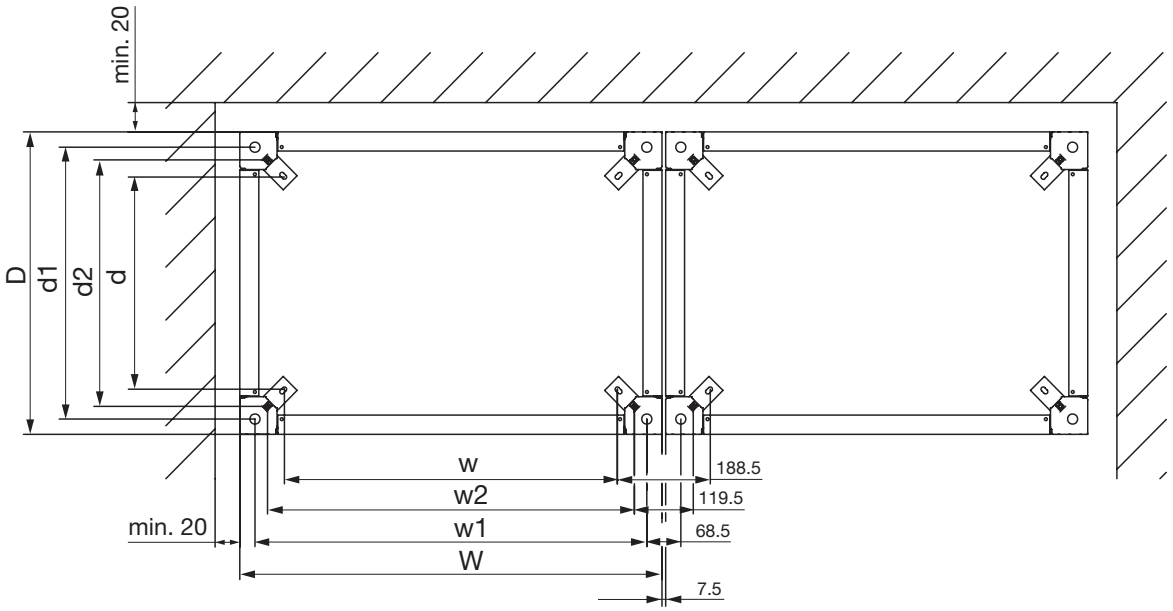

Type	W	w	w1	w2	D	d	d1	d2	H	Weight in kg
RZS13	356	175	295	244	306	125	245	194	100	3.8
RZS23	606	425	545	494	306	125	245	194	100	5.1
RZS33	856	675	795	744	306	125	245	194	100	6.3
RZS43	1106	925	1045	994	306	125	245	194	100	7.5
RZS53	1356	1175	1295	1244	306	125	245	194	100	8.4
RZS14	356	175	295	244	406	225	345	294	100	4.3
RZS24	606	425	545	494	406	225	345	294	100	5.5
RZS34	856	675	795	744	406	225	345	294	100	6.7
RZS44	1106	925	1045	994	406	225	345	294	100	7.9
RZS54	1356	1175	1295	1244	406	225	345	294	100	8.8
RZS16	356	175	295	244	606	425	545	494	100	5.3
RZS26	606	425	545	494	606	425	545	494	100	6.5
RZS36	856	675	795	744	606	425	545	494	100	7.7
RZS46	1106	925	1045	994	606	425	545	494	100	8.9
RZS56	1356	1175	1295	1244	606	425	545	494	100	9.8

> Dimensions in mm

TriLine C switchgear cabinets

Dimensions and weights of the top plates

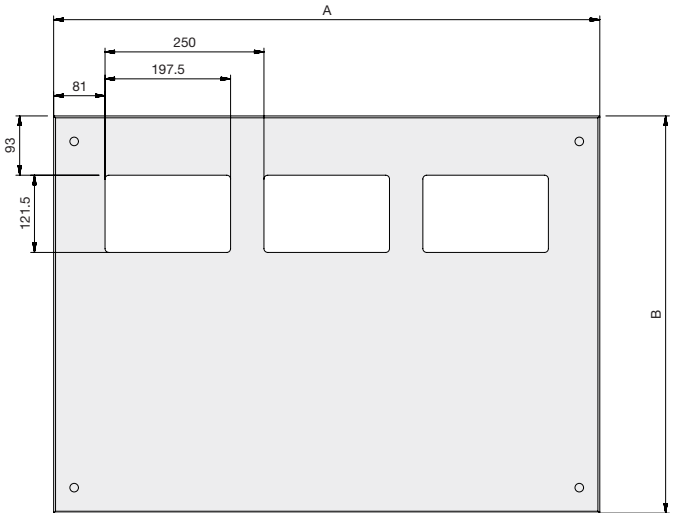

Type	A	B	Weight in kg
RD13F3	360	325	1.7
RD23F3	610	325	2.5
RD33F3	859	325	3.4
RD43F3	1109	325	5.3
RD53F3	1359	325	6.4
RD14F3	360	425	2.9
RD24F3	610	425	4.6
RD34F3	859	425	3.7
RD44F3	1109	425	12.7
RD54F3	1359	425	12.8
RD16F3	360	625	4.6
RD26F3	610	625	7.4
RD36F3	859	625	10.8
RD46F3	1109	625	18.8
RD56F3	1359	625	18.9

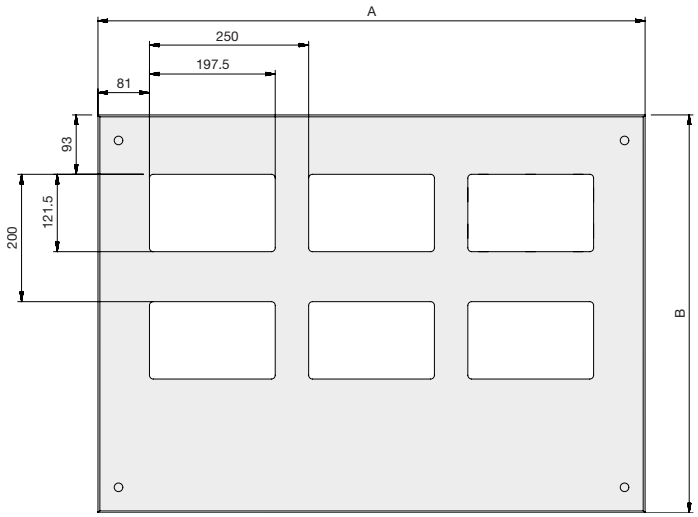

Type	A	B	Weight in kg
RD16F4	360	625	4.8
RD26F4	610	625	7.4
RD36F4	859	625	9.3
RD46F4	1109	625	18.7
RD56F4	1359	625	18.9

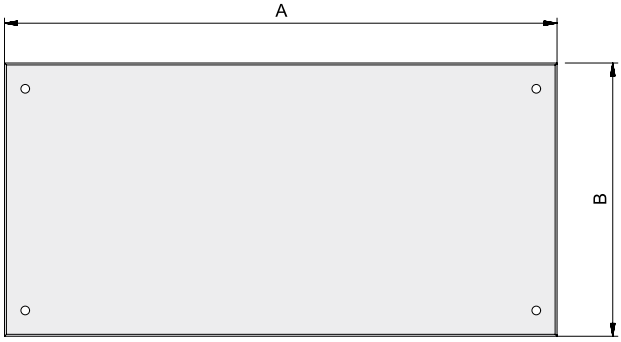

Type	A	B	Weight in kg
RD13G	360	325	1.7
RD23G	610	325	2.8
RD33G	859	325	3.8
RD43G	1109	325	6.5
RD53G	1359	325	7.9
RD14G	360	425	2.2
RD24G	610	425	3.6
RD34G	859	425	5.0
RD44G	1109	425	8.4
RD54G	1359	425	10.3
RD16G	360	625	3.2
RD26G	610	625	5.1
RD36G	859	625	7.1
RD46G	1109	625	12.0
RD56G	1359	625	14.6

> Dimensions in mm

TriLine C switchgear cabinets

Dimensions and weights of the bottom plates

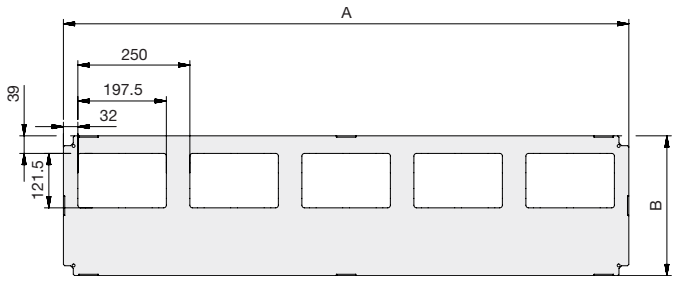

Type	A	B	Weight in kg
RB13F3	262	212	1.4
RB23F3	512	212	2.7
RB33F3	762	212	3.2
RB43F3	1012	212	4.7
RB53F3	1262	212	5.5

Type	A	B	Weight in kg
RB14F3	262	312	2.1
RB24F3	512	312	2.8
RB34F3	762	312	4.3
RB44F3	1012	312	6.3
RB54F3	1262	312	6.8

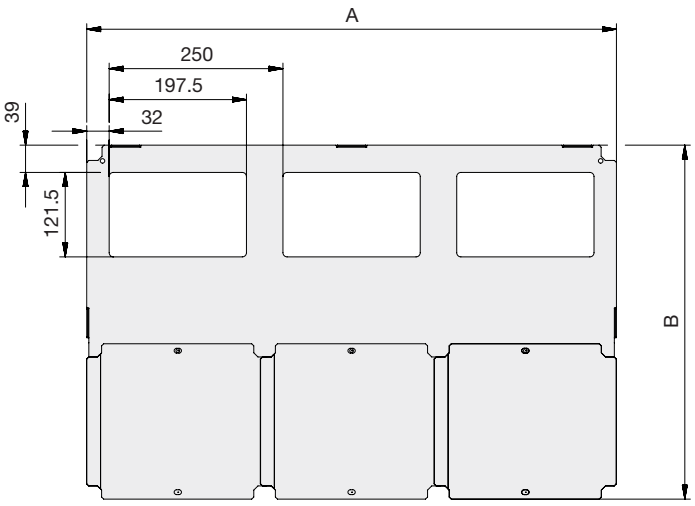

Type	A	B	Weight in kg
RB16F3	262	509	2.9
RB26F3	512	509	4.7
RB36F3	762	509	6.5
RB46F3	1012	509	9.3
RB56F3	1262	509	10.6

> Dimensions in mm

TriLine C switchgear cabinets

Dimensions and weights of the bottom plates

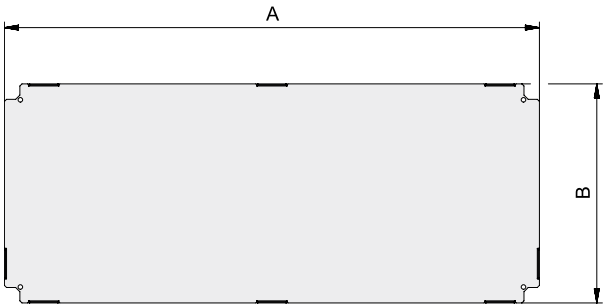

Type	A	B	Weight in kg
RB13G	262	212	0.8
RB23G	512	212	1.4
RB33G	762	212	2.1
RB43G	1012	212	2.7
RB53G	1262	212	3.4
RB14G	262	312	1.2
RB24G	512	312	2.1
RB34G	762	312	3.1
RB44G	1012	312	4.0
RB54G	1262	312	4.9
RB16G	262	512	1.8
RB26G	512	512	3.3
RB36G	762	512	4.9
RB46G	1012	512	6.4
RB56G	1262	512	7.9

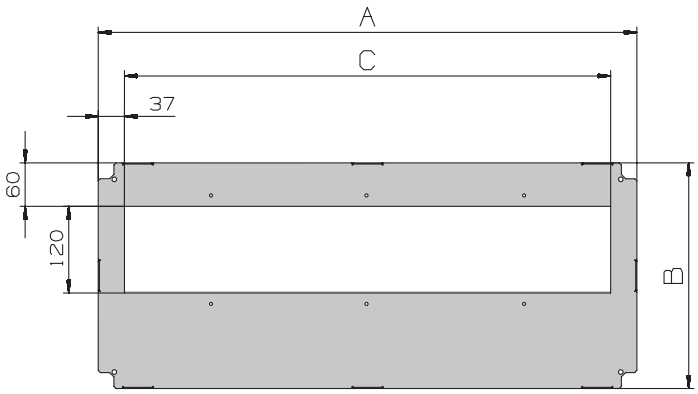

Type	A	B	Weight in kg
RB24F	512	312	2.2
RB34F	762	312	3.0
RB44F	1012	312	3.9
RB54F	1262	312	4.8

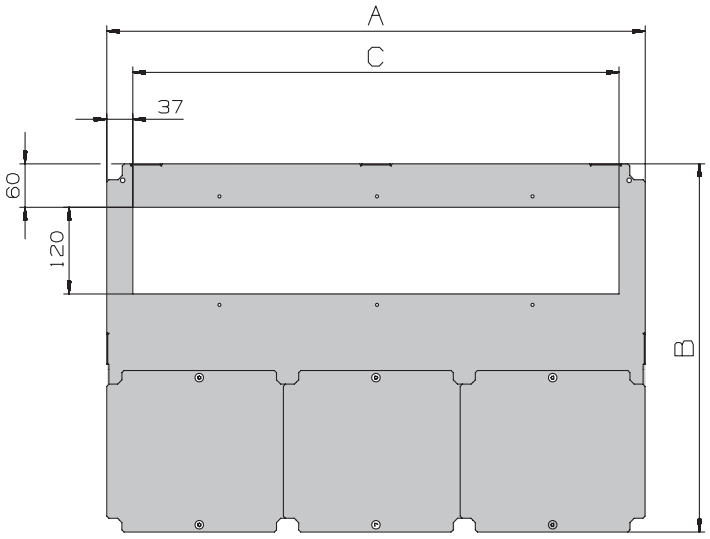

Type	A	B	Weight in kg
RB26F	512	509	3.7
RB36F	762	509	5.3
RB46F	1012	509	7.1
RB56F	1262	509	8.8

> Dimensions in mm

Notes

TriLine C switchgear cabinets

Dimensions and weights of the doors

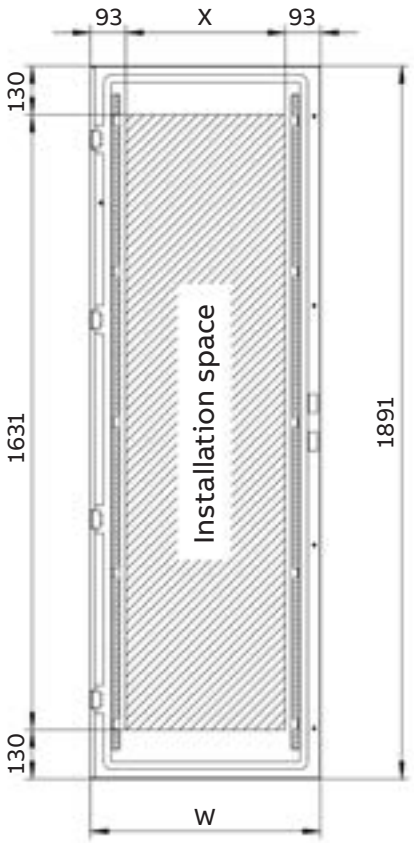

Sheet steel doors

Type	W	X	Weight in kg
RZB112	359.5	173.5	17.0
RZB212	609.5	423.5	24.0
RZB312	859.5	673.5	30.5
RZB114	359.5	173.5	17.0
RZB214	609.5	423.5	24.0
RZB314	859.5	673.5	30.5

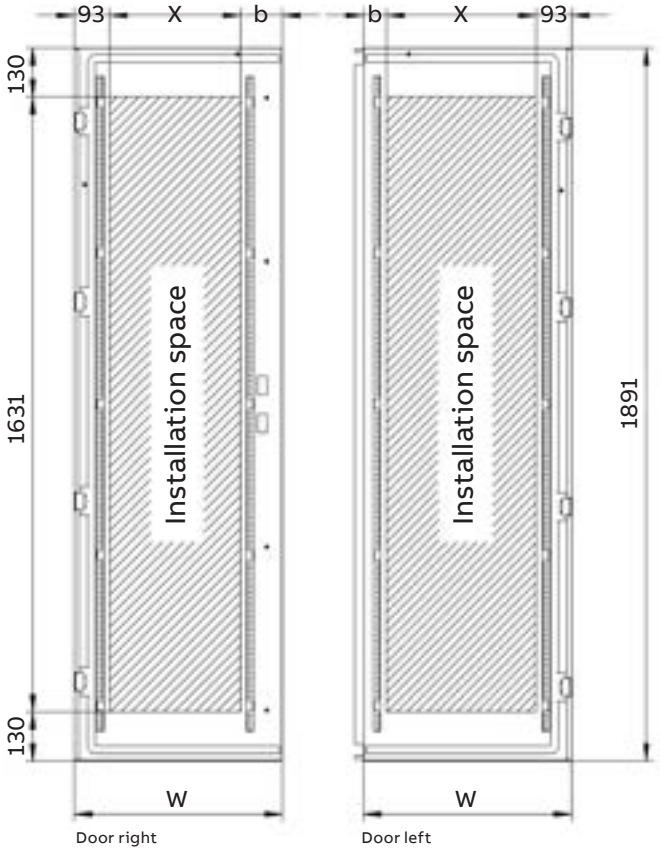

Sheet steel doors left/right

Type	W	X	b	Weight in kg
RZB412L	552	398	61	22.5
RZB412R	552	348	111	20.0
RZB512L	677	523	61	25.0
RZB512R	677	473	111	24.5
RZB414L	552	398	61	22.5
RZB414R	552	348	111	20.0
RZB514L	677	523	61	25.0
RZB514R	677	473	111	24.5

> Dimensions in mm

TriLine C switchgear cabinets

Dimensions and weights of the doors

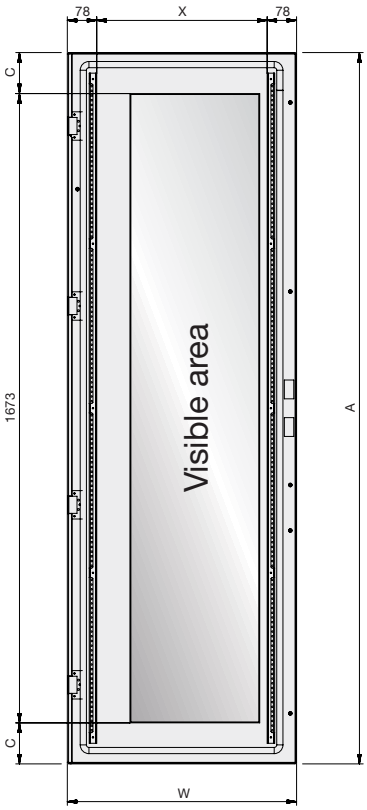

Transparent doors

Type	A	W	C	X	Weight in kg
RZT212	1891	609.5	109	459	20.0
RZT312	1891	859.5	109	709	21.0
RZT214	2041	609.5	259	459	23.0
RZT314	2041	859.5	259	709	25.0

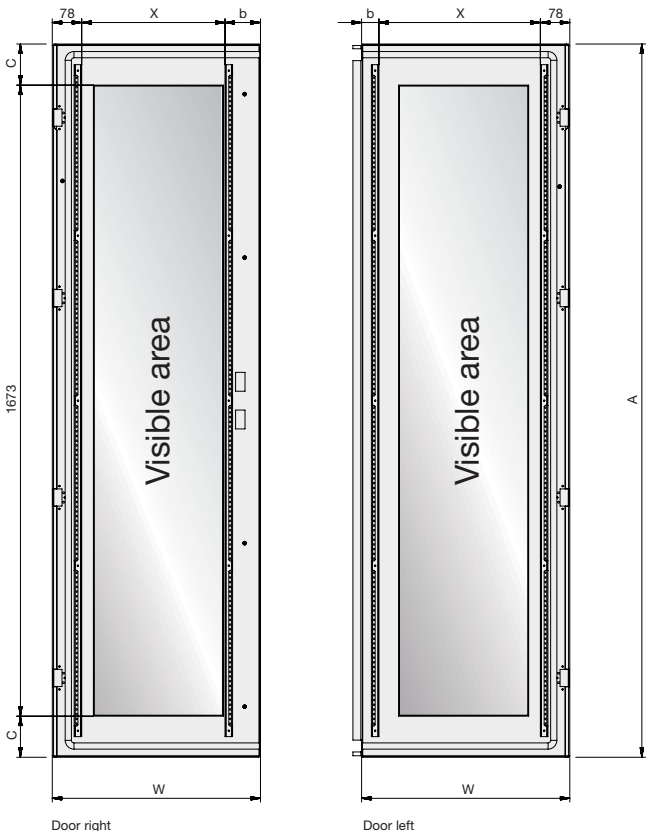

Transparent doors left/right

Type	A	W	C	X	b	Weight in kg
RZT412L	1891	552	109	428	46	19.0
RZT412R	1891	552	109	380	94	18.5
RZT512L	1891	677	109	553	46	23.0
RZT512R	1891	677	109	505	94	22.0
RZT414L	2041	552	259	428	46	22.0
RZT414R	2041	552	259	380	94	21.5
RZT514L	2041	677	259	553	46	26.5
RZT514R	2041	677	259	505	94	25.5

> Dimensions in mm

TriLine C switchgear cabinets

Dimensions and weights side panels

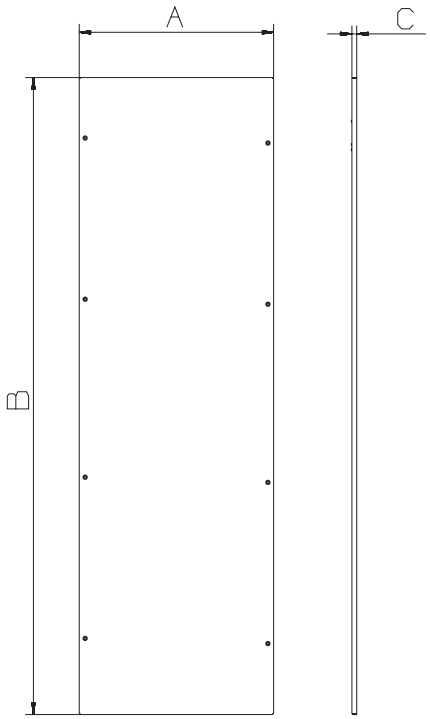

Type	A	B	C	Weight in kg
RSW83P2	290	1891	15	14.00
RSW84P2	390	1891	15	19.00
RSW86P2	590	1891	15	28.00
RSW103P2	290	2191	15	16.50
RSW104P2	390	2191	15	21.80
RSW106P2	590	2191	15	32.40

TriLine C switchgear cabinets

Crane handling

The TriLine enclosure can be lifted by following the instructions provided. For lifting, the lifting lugs from ABB STRIEBEL & JOHN with order designation RZ11P4 must be used. The weight specifications for enclosure combinations (see below) must also be observed.



max. 480 kg

max. 480 kg

max. 480 kg



		1 PW	2 PW	3 PW	4 PW	5 PW
	Permissible total weight per cabinet	1200 kg	1200 kg	1200 kg	1200 kg	1200 kg
	Permissible total weight	1200 kg	1200 kg	1200 kg	1200 kg	1200 kg
	Permissible total weight per cabinet	600 kg	600 kg	600 kg	-	-
	Permissible total weight	1200 kg	1200 kg	1200 kg	-	-
	Permissible total weight per cabinet	400 kg	400 kg	400 kg	-	-
	Permissible total weight	1200 kg	1200 kg	1200 kg	-	-

> Dimensions in mm

TriLine C switchgear cabinets

Sectional view with dimensions for the installation of mounting plates

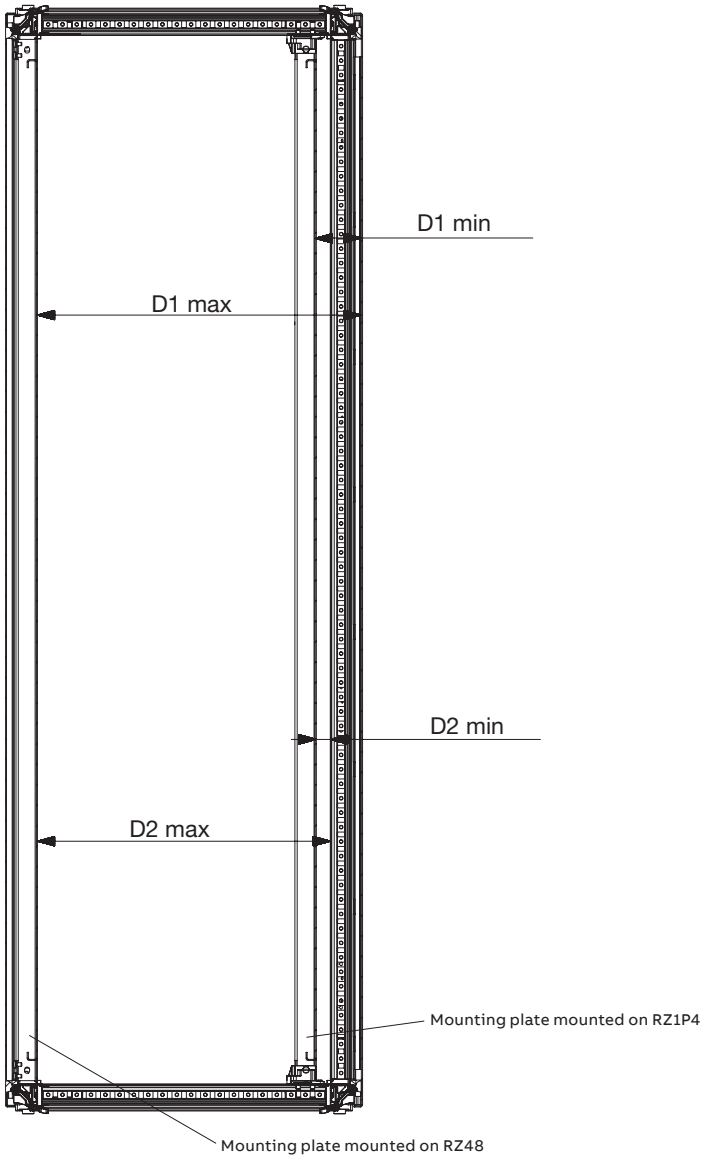

Depth	*D1 max.	*D1 min.	**D1 max.	*D2 min.	**D2 max.	*D2 max.
325	202	79	267	25	212	148
425	302	79	367	25	312	248
625	502	79	567	25	512	448

* for mounting on RZ1P4
** for mounting on RZ48

> Dimensions in mm

TriLine C switchgear cabinets

Sectional view with dimensions as well as dimensions and weights of mounting plates

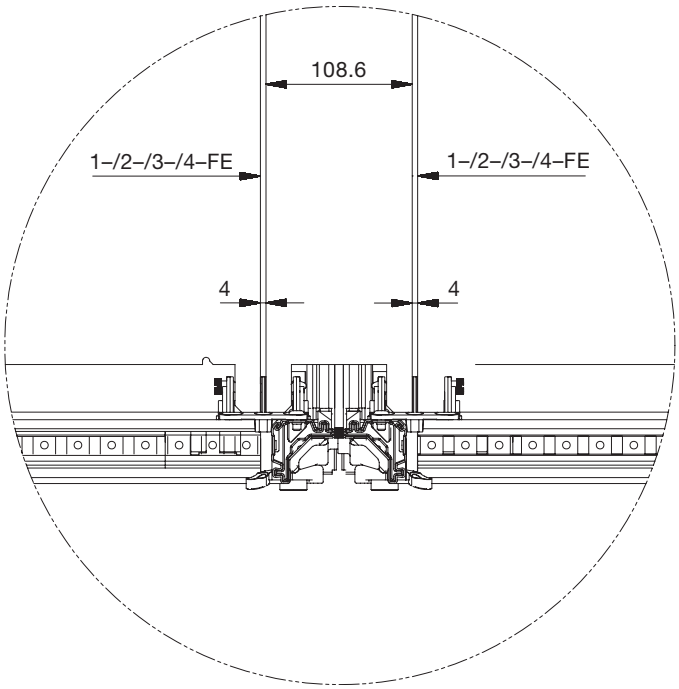

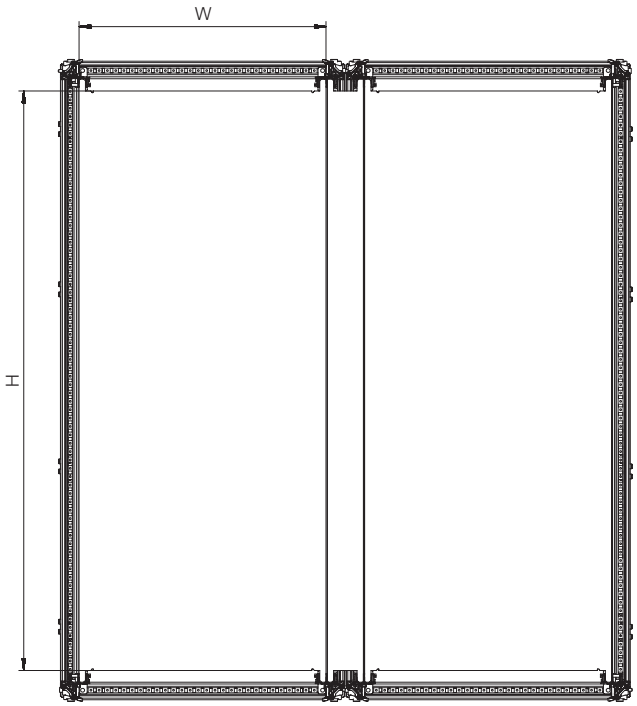

GU	OH	Type	W	H	Weight in kg
12	8	RM18	246	1730	10.80
		RM28	496	1730	17.80
		RM38	746	1730	21.00
		RM48	996	1730	31.80
14	10	RM110	246	2030	12.70
		RM210	496	2030	20.80
		RM310	746	2030	29.00
		RM410	996	2030	37.20
12	8	RM8	113	1730	4.50
14	10	RM10	113	2030	7.60

> Dimensions in mm

TriLine C switchgear cabinets

Sectional view with dimensions for installing the touch-protection

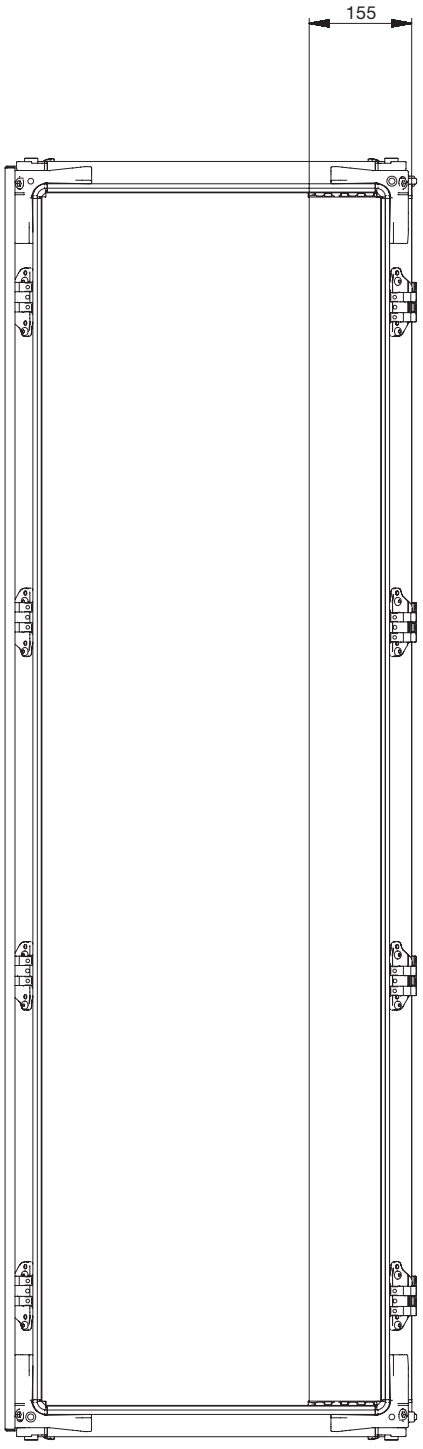

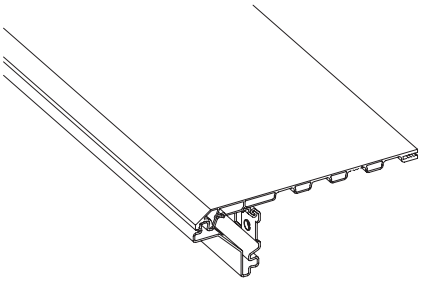

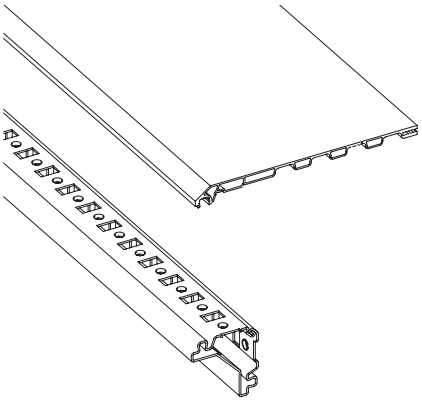

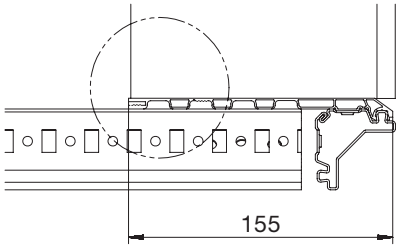

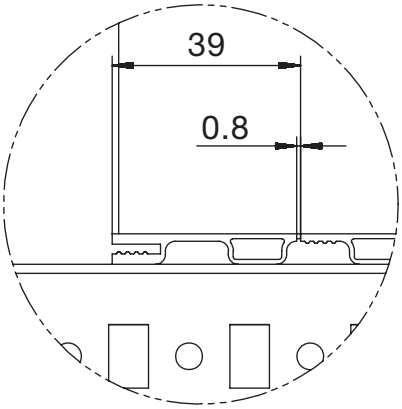

> Dimensions in mm

TriLine C switchgear cabinets

Sectional view with dimensions for installing modules on the WR mounting frame

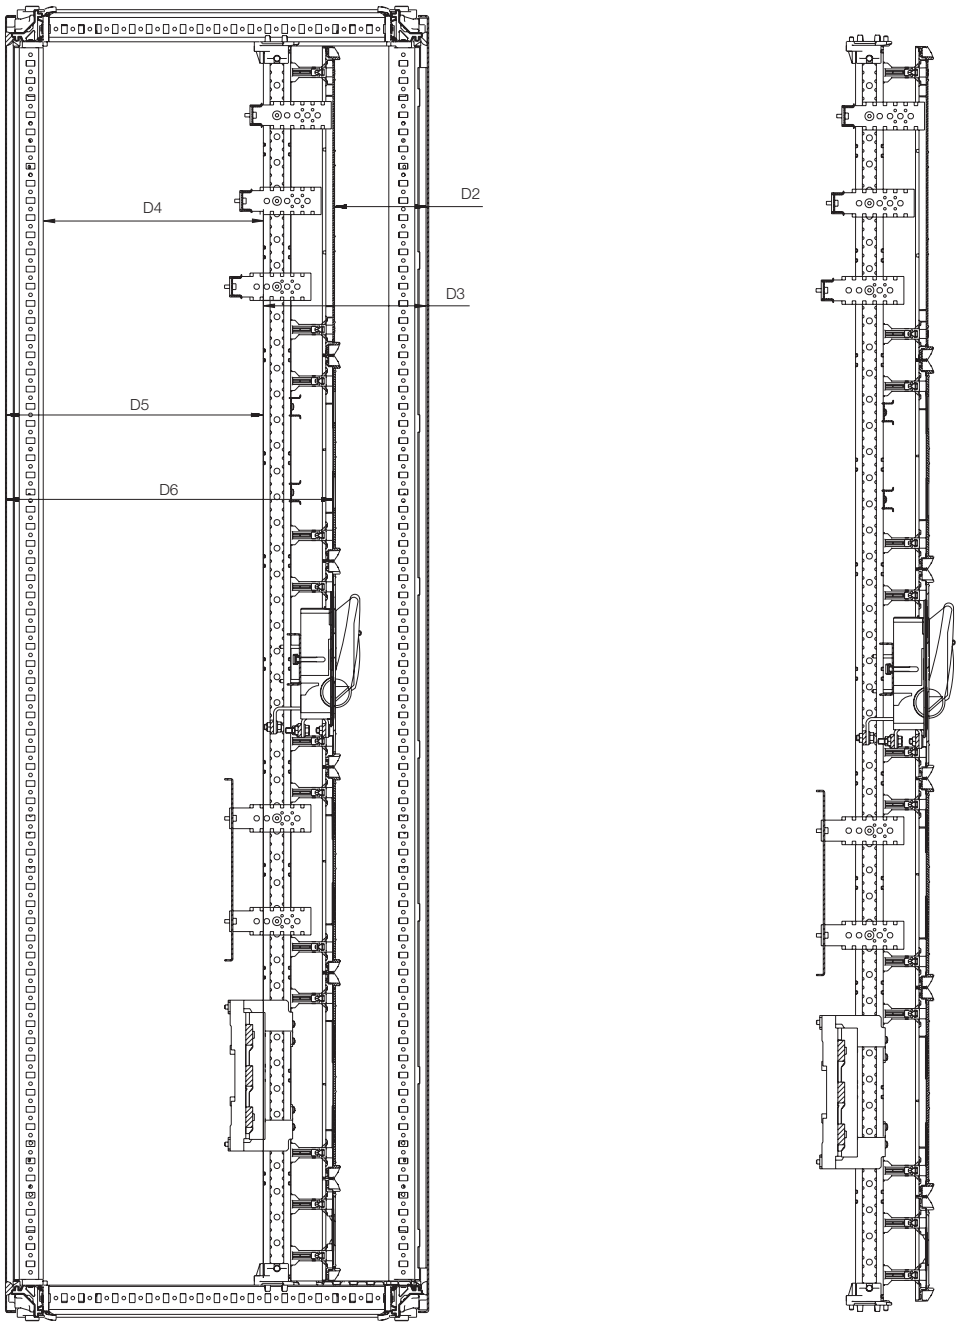

	Dimension	Cabinet depth 325	Cabinet depth 425	Cabinet depth 625
Distribution cover - Door	D2	87	137	137
WR Mounting frame - Door	D3	192	242	242
Free size WR Mounting frame - framework	D4	75	125	325
Free size WR Mounting frame - rear panel	D5	130	180	380
Cover – rear panel	D6	232	282	482

> Dimensions in mm

TriLine C switchgear cabinets

Sectional view with dimensions of the EDF installation set WNF on the WR mounting frame

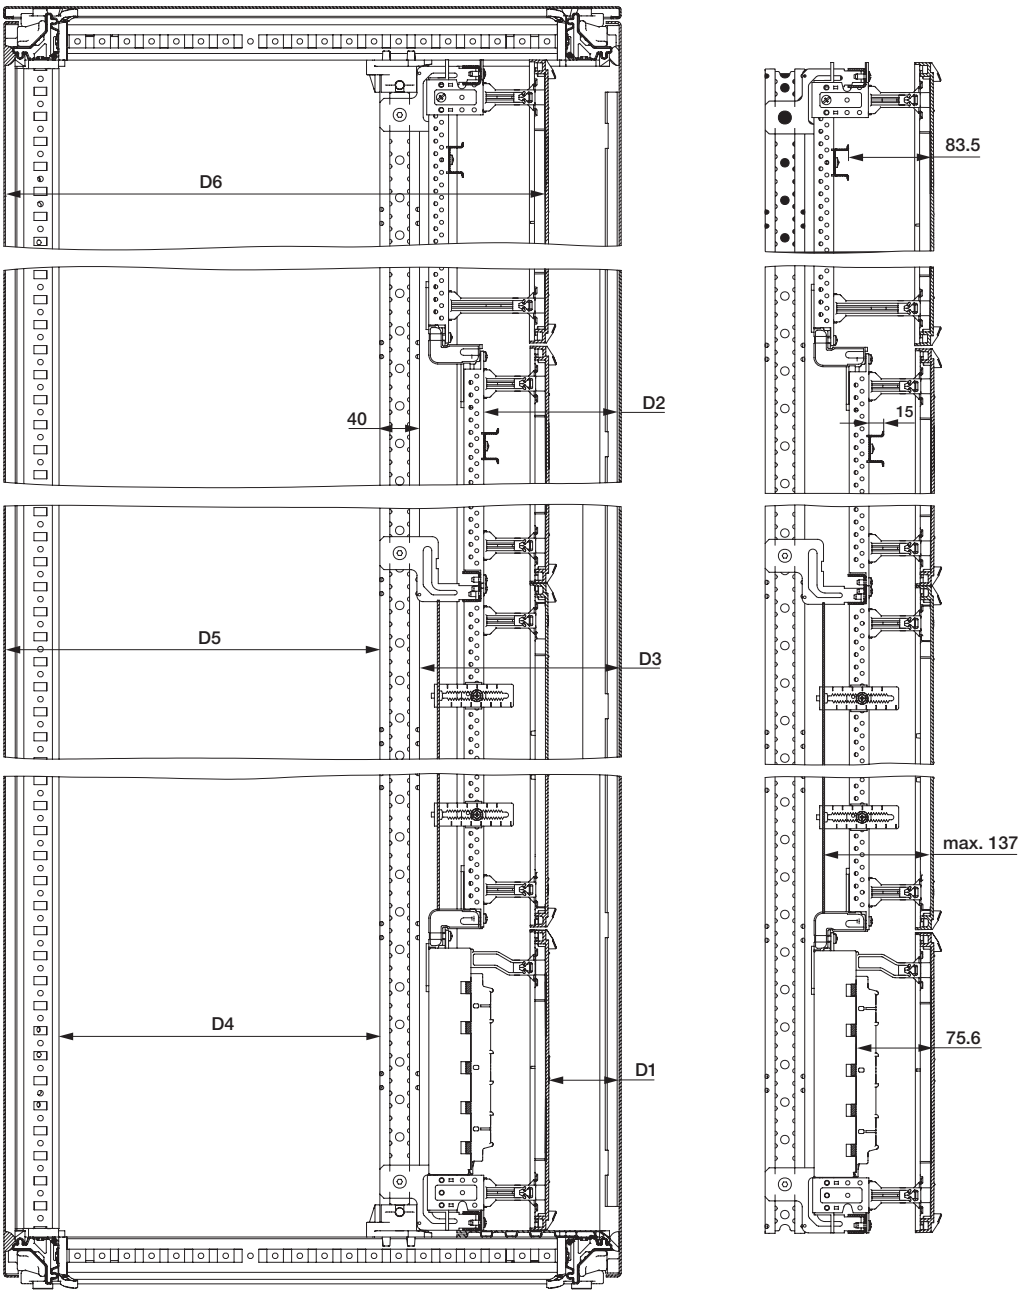

	Dimension	Cabinet depth 425	Cabinet depth 625
Distribution cover - Door	D1	71	71
EDF-Mounting frame – Door	D2	137	137
WR Mounting frame - Door	D3	202	202
Free size WR Mounting frame - framework	D4	125	325
Free size WR Mounting frame - rear panel	D5	179	379
Cover – rear panel	D6	346	546

> Dimensions in mm

TriLine C switchgear cabinets

Installation variants of the EDF installation set WNF

Installation variants:
GU 12, OH 8

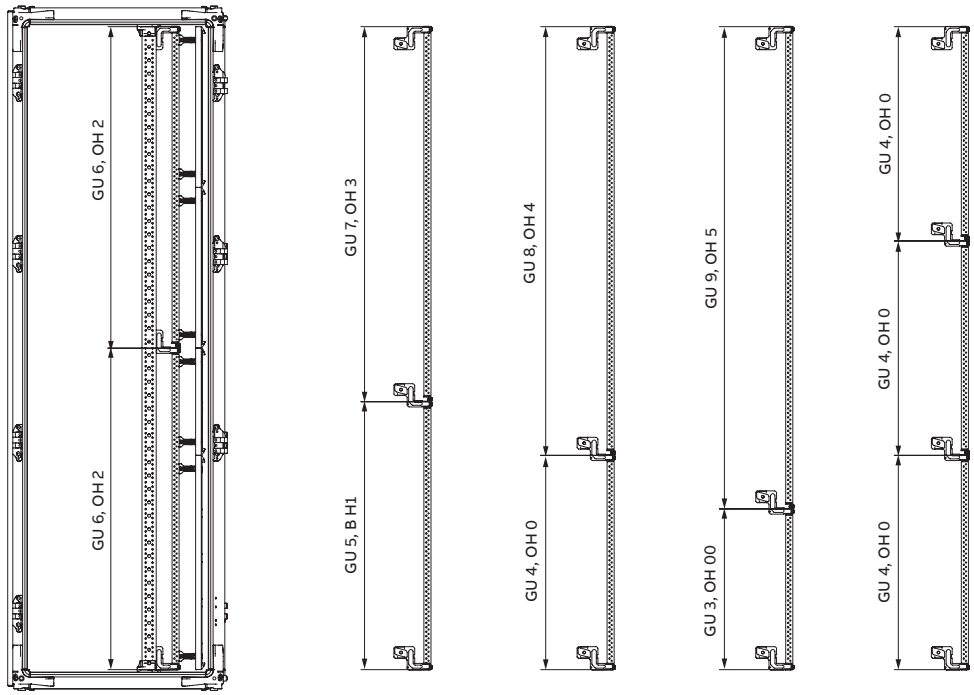

Installation variants:
GU 14, OH 10

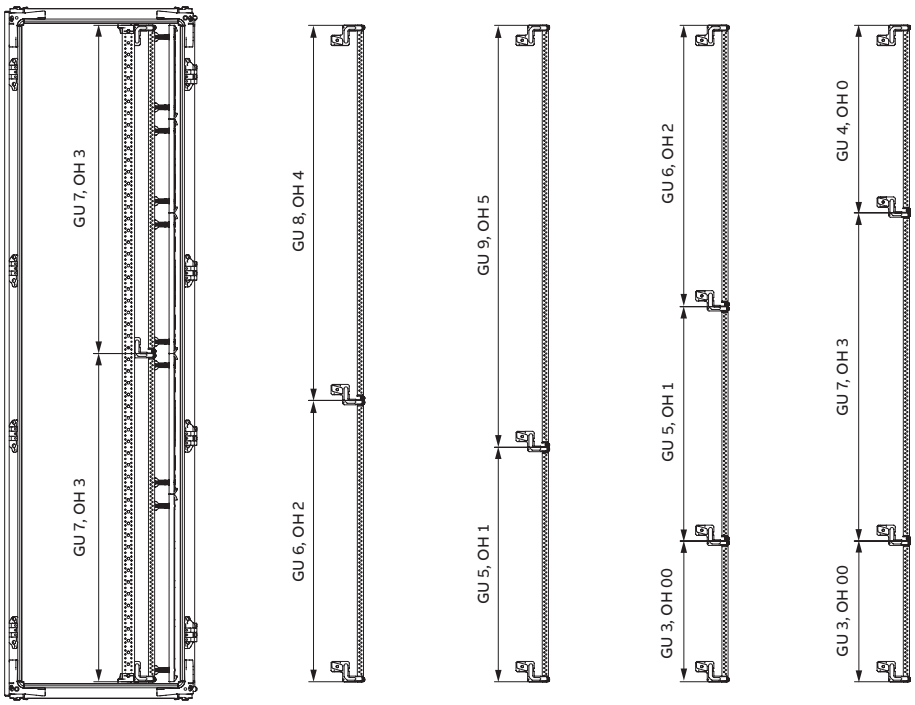

> Dimensions in mm

TriLine C switchgear cabinets

Sectional view with dimensions for EDF installation set RNF

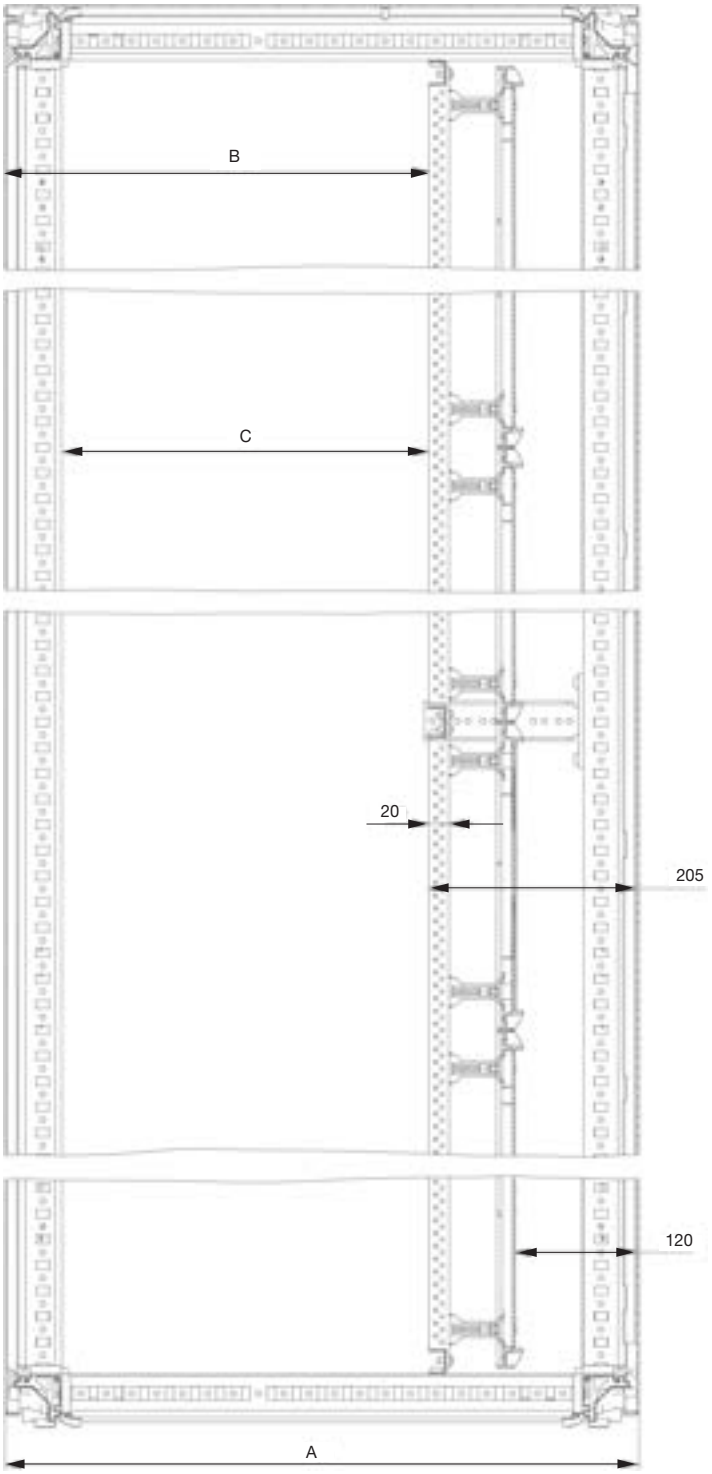

Depth	A	B	C
325	325	116	62
425	425	216	162
625	625	416	362

> Dimensions in mm

TriLine C switchgear cabinets

Installation variants of the EDF installation set RNF

Installation variants:
GU 12, OH 8

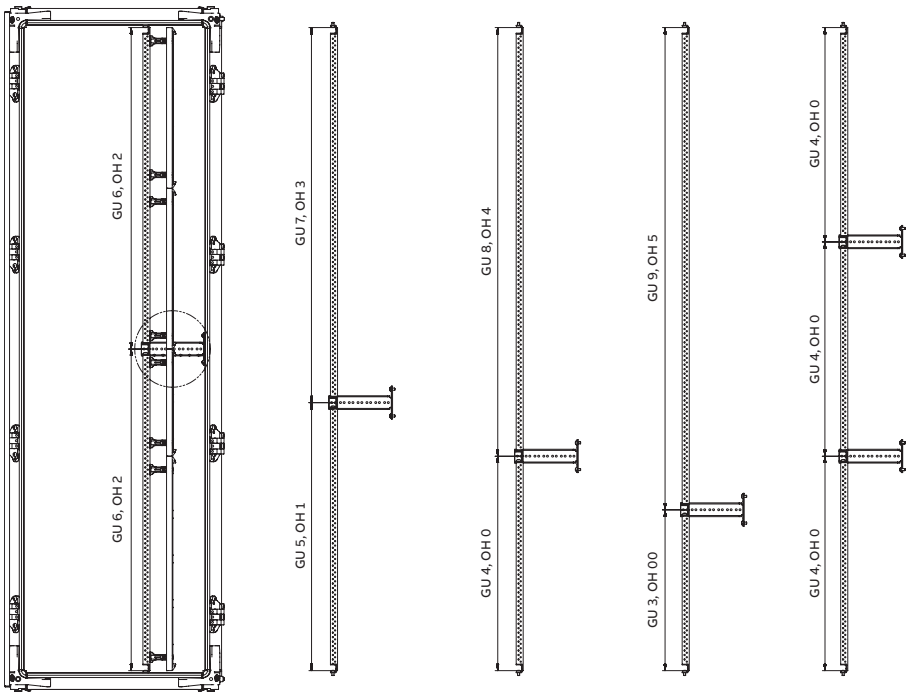

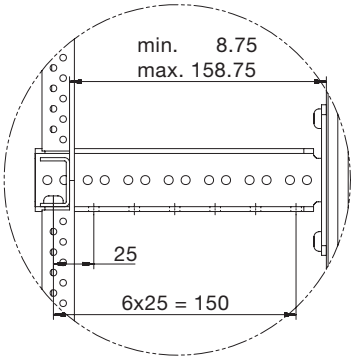

Installation variants:
GU 14, OH 10

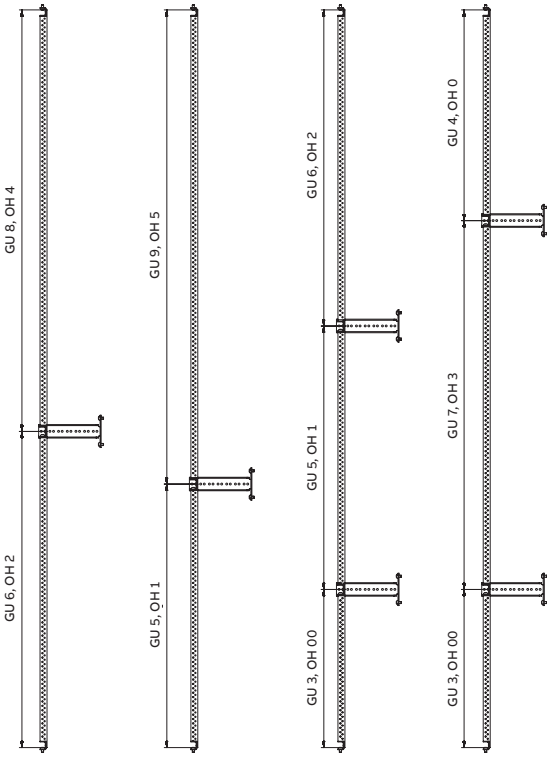

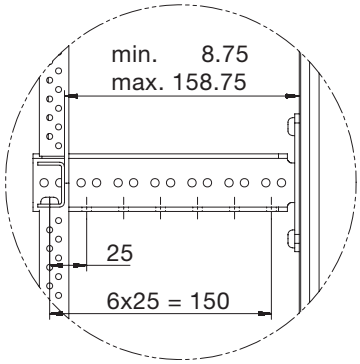

> Dimensions in mm

TriLine C switchgear cabinets

Installation variants of the universal cross members

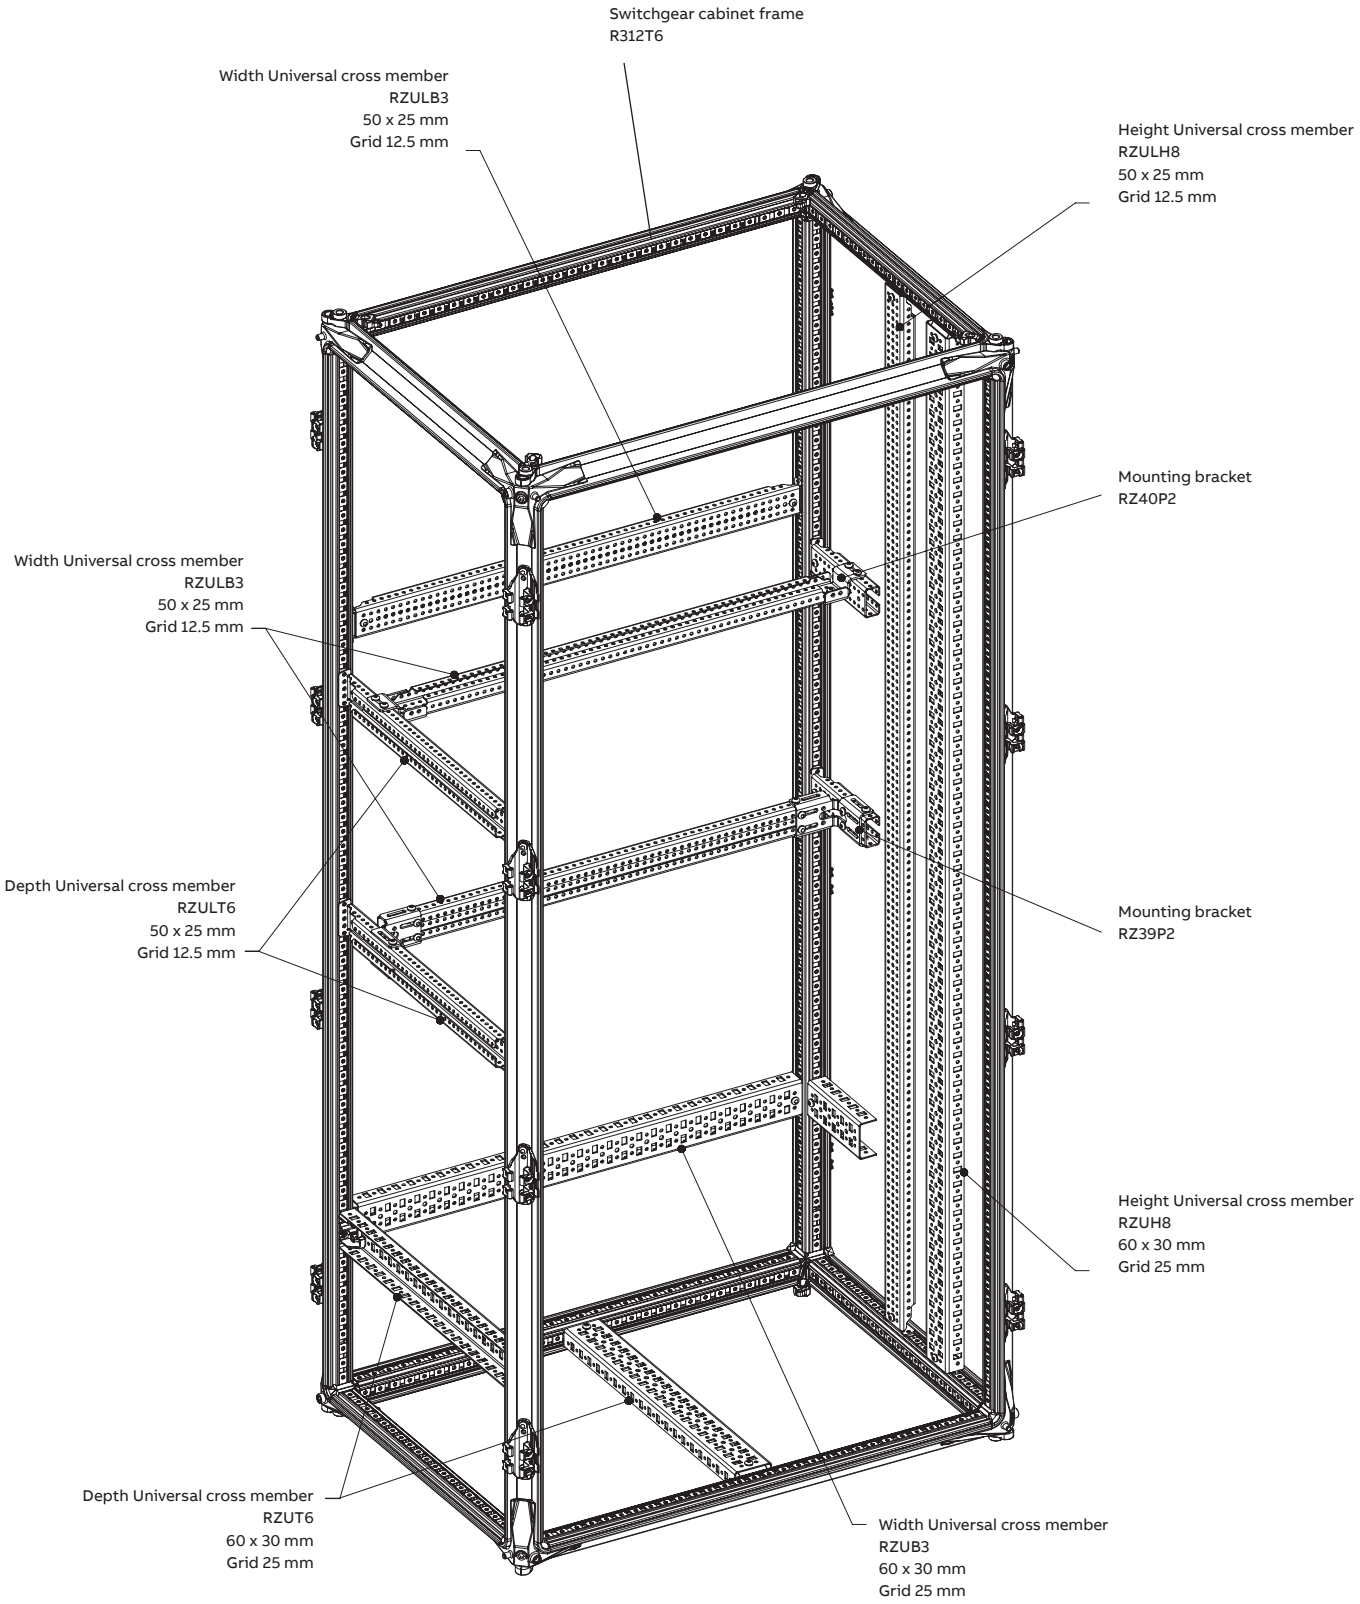

> Dimensions in mm

TriLine C switchgear cabinets

Installation variants of the profile rails

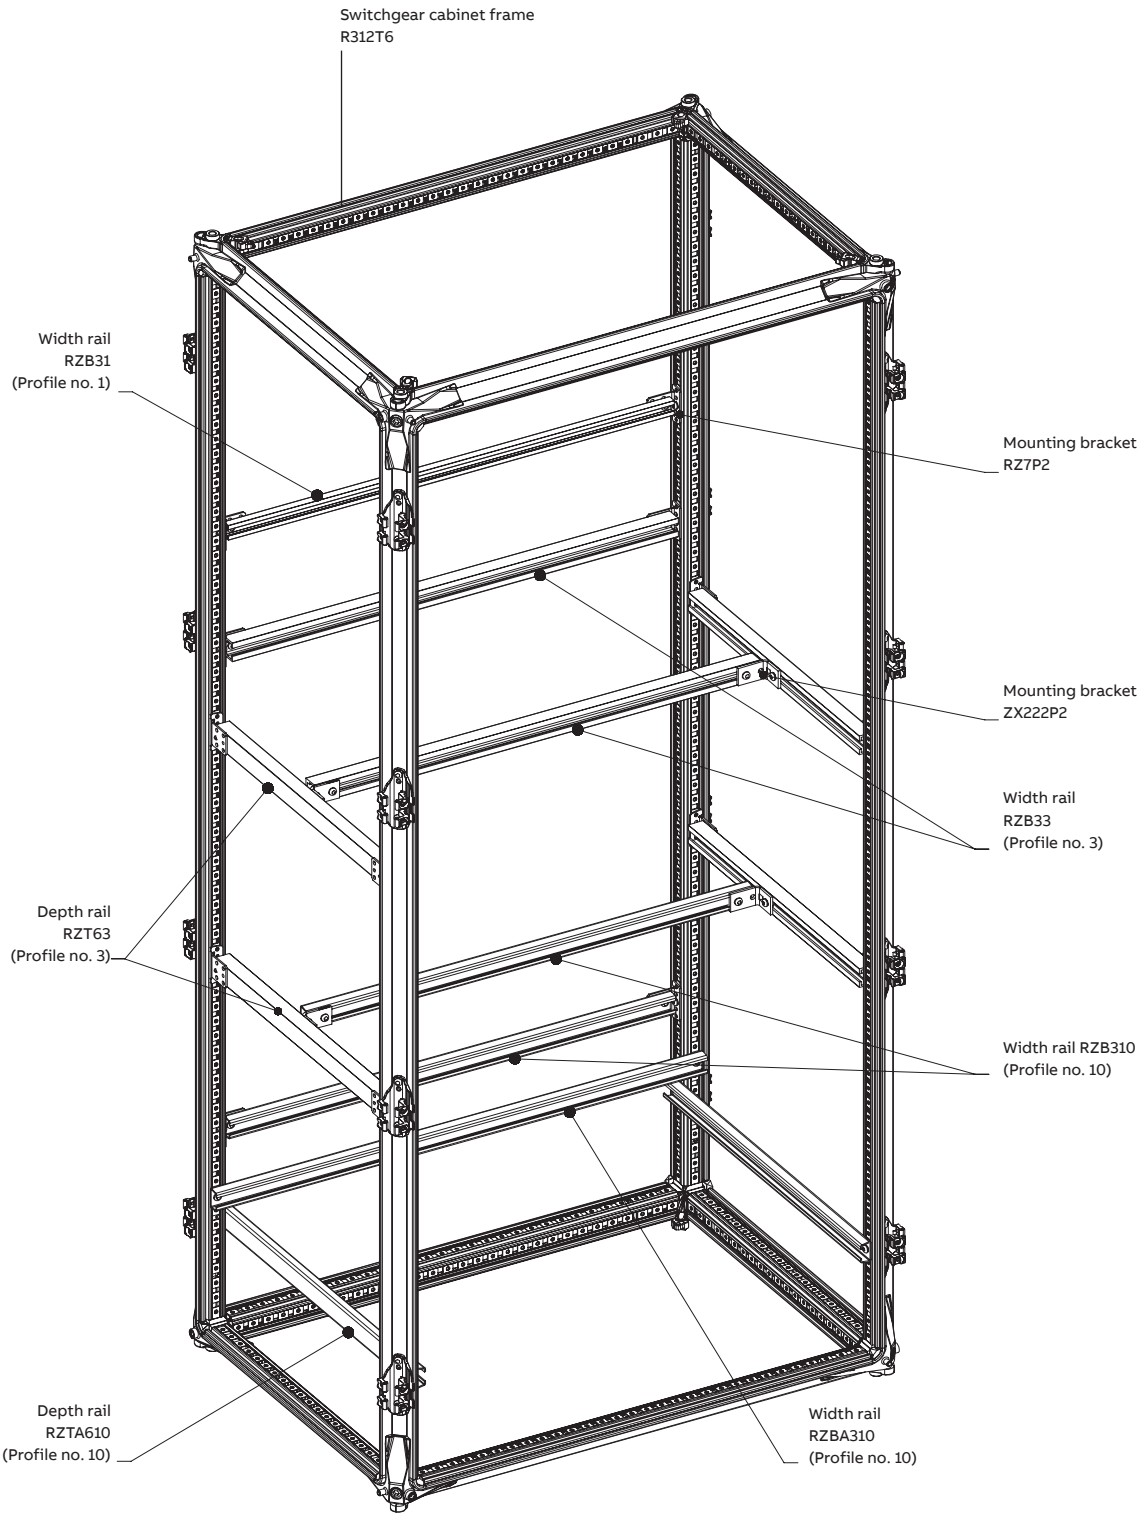

> Dimensions in mm

Interior expansion system CombiLine N

The right module for every type of application

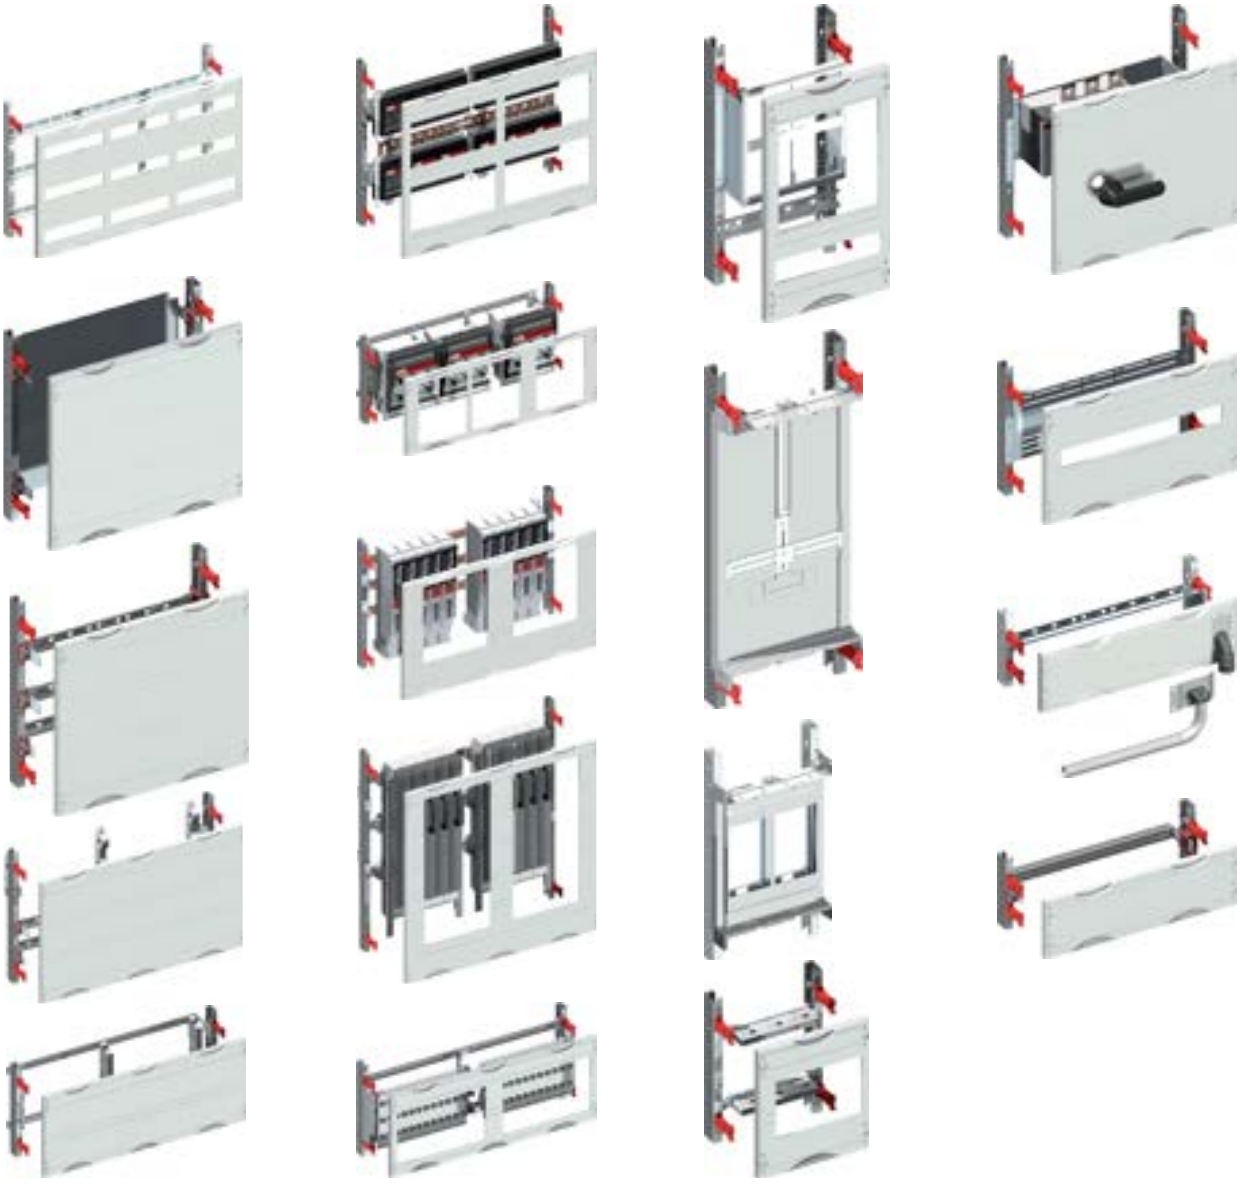

Interior expansion system CombiLine N

Expansion with EDF or WR mounting frame

Empty cabinets for expansion with EDF mounting frame

Small distributor
UL and AL ⧈

Wall-mounted cabinets
U and A ⧈, B⏚
TwinLine-G, TwinLine-L and TwinLine-W ⏚⧈

Standalone cabinets
TwinLine-H ⧈ ⏚
TwinLine-G, TwinLine-L and TwinLine-W ⏚⧈

Series switching cabinets
TriLine®, System pro *E* power ⏚

Fire protection housing
UF, AF and SF ⏚

Empty cabinets for expansion with WR mounting frame

Wall-mounted cabinets
TwinLine-G, TwinLine-L and TwinLine-W ⏚⧈

Standalone cabinets
TwinLine-G, TwinLine-L and TwinLine-W ⏚⧈

Series switching cabinets
TriLine®, System pro *E* power ⏚

EDF mounting frame up to 400 A

WR mounting frame up to 850 A

Interior expansion system CombiLine N

Possible applications with EDF mounting frame

Small distributor of the UL series, AL/wall-mounted cabinets of the series U, A and TwinLine-G, -L and -W
Fire protection housing of the series UF, AF
Example: Expansion with modules (mounted) on EDF mounting frame in the TwinLine-G wall-mounted cabinet

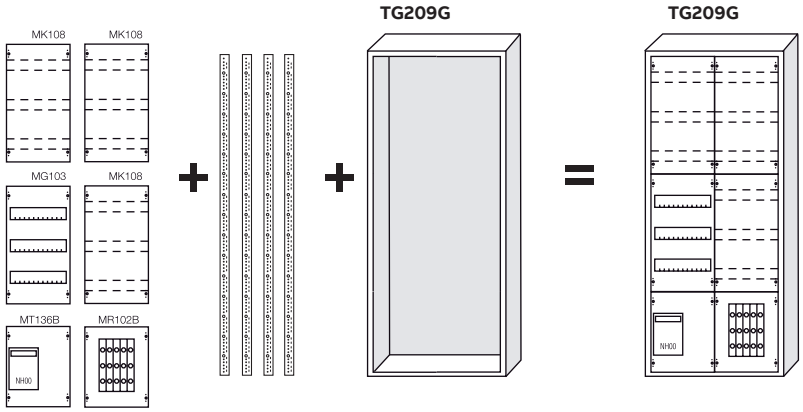

Modules (mounted) + EDF mounting frame + empty cabinet = wall-mounted distributor

Delivery form
Modules are delivered ex works assembled on the EDF mounting frame (installed in the cabinet).

Standalone cabinets of the series TwinLine-H as well as TwinLine-G, -L and -W
Series switching cabinets of the series TriLine®, pro *E* power system/fire protection housing of the series SF
Example: Expansion with modules (unassembled as a kit) and EDF mounting frame in the TwinLine-L standalone cabinet

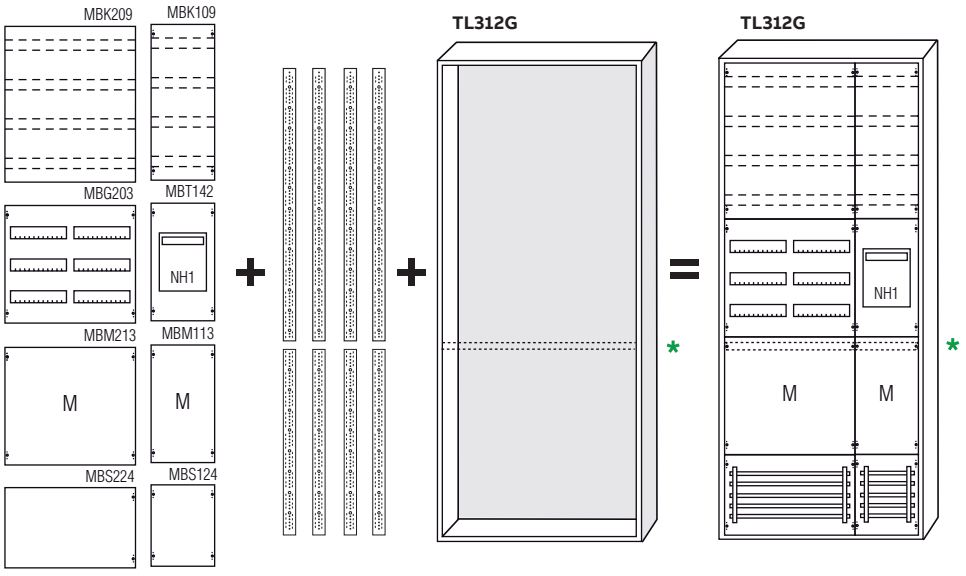

+ 5 pcs. ZX1001 copper rail
+ 5 pcs. ZX1002 copper rail

Modules (kit) + EDF mounting frame + empty cabinet = standalone distributor

Delivery form
Kits, EDF profiles, copper rails and empty cabinet are each delivered packaged individually.

* The EDF mounting frame may not exceed a maximum height of 1350 mm (installation height 5) at once. For structural reasons in standalone cabinets (prepared for EDF mounting frame), that is why a central supporting rail is mounted ex works, which can be moved up and down in the grid 150 mm.

Interior expansion system CombiLine N

Possible applications with WR mounting frame

Standalone cabinets of the series TwinLine/series switching cabinets of the series TriLine®, System pro *E* power
Example: Expansion with modules (mounted) on WR mounting frame in the TwinLine- L standalone cabinet

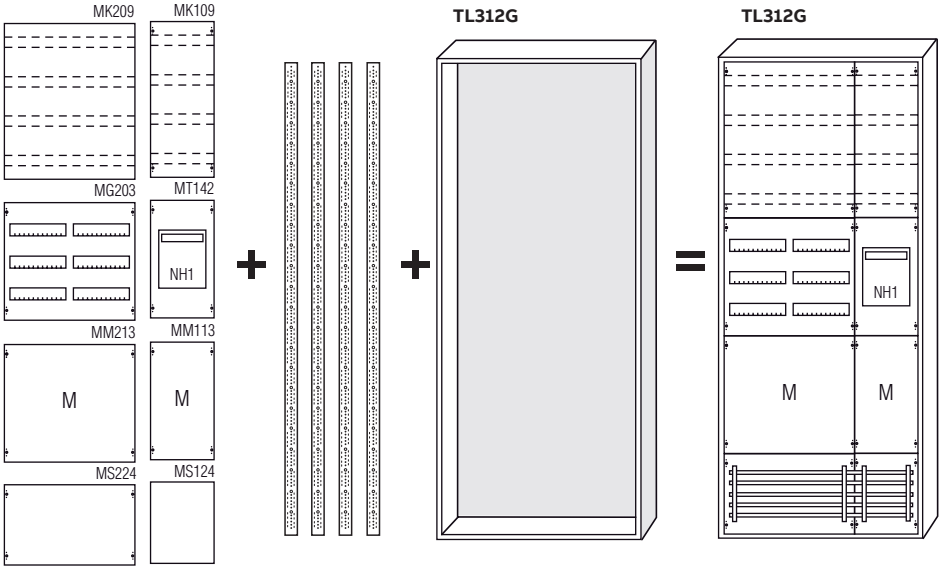

+ 5 pcs. ZXM1003 copper rail

Modules (mounted) + WR mounting frame + empty cabinet = standalone distributor

Delivery form
Modules are delivered ex works assembled on the WR mounting frame and installed in the cabinet.

Interior expansion system CombiLine N

The three delivery forms

The interior expansion of modular cabinet series can be effortlessly mastered with the perfectly sophisticated quick-assembly system from ABB STRIEBEL & JOHN. Easy, quick and safe – these are the system's three product properties that speak for themselves. You choose which delivery form is right for you: Choose the complete delivery if you would like to have the modules installed in the empty cabinet ex works, the kit with instructions for assembly in order to set up the modules yourself on the mounting frame or the delivery with individual parts.

Complete delivery
The module system panel is completely assembled on the mounting frame with all modules and is delivered installed in the distributor cabinet. The mounting frame must be ordered separately.

Advantage: From the list of CombiLine N modules, you chose the modules that are tailored to your object, thereby getting the correct low-voltage distribution in the easiest way. The module control panel you have thus planned is delivered installed in the cabinet ex works. This way you do not have to spend time looking for system accessories, such as angle brackets, screws or retaining elements. All you need to do is choose the appropriate mounting frame. Our selection StriePlan can take care of this if desired.

Delivery as a kit
All of the individual parts required to assemble a module are delivered individually packaged as a kit with instructions for assembly. All you need to do is choose the appropriate mounting frame. The mounting frame must be ordered separately. Our software StriePlan will take care of choosing the mounting frame if desired.

Advantage: The kits allow you to be flexible when it comes to warehousing. You do not have to spend time looking for system accessories, such as angle brackets, screws or retaining elements. The enclosed instructions make assembly a breeze. Software support from StriePlan makes planning and calculation perfectly quick and clear.

Delivery in individual parts
The desired expansion parts are purchased individually in order to set up, expand or convert a module on your own.

Advantage: With a manageable number of individual parts, if necessary you can remain quick and flexible when it comes to setting up, expanding or converting distribution.

Complete delivery

Delivery as a kit



Delivery in individual parts

Interior expansion system CombiLine N

Technical specifications

Standards/provisions			
DIN EN 61439-1/-2/-3 (VDE 0660-600-1/-2/-3)*1	X		
DIN 43880 (rail-mounted devices)	X		
Protection class	IP2XC		

Electrical characteristics			
Rated impulse withstand voltage (U_{imp})	6 kV		
Overvoltage category	III		
Degree of contamination	3		
Protection class	I/II		
Rated current of the switchgear combination (I_{nA})	bis 850 A		
	Rail-mounted devices DIN 43880	NH-fuse switch disconnector	Busbar systems
Rated impulse withstand voltage (I_{pk})	25 kA	to 52 kA	to 74 kA
Rated short-time withstand current (I_{cw})	12.5 kA	to 25 kA	to 35 kA
	-	Values by request	see the chapter Busbar systems
Rated frequency (f)	50 Hz		
Rated insulation voltage (U_i)	690 V AC		
Rated operating voltage (U_e)	400 V AC		

*1 The permissible heating for switchgear combinations (SK) up to 630 A rated current can be verified using the procedure according to 10.10.4.2. The required power dissipation capacities can be found in the tables of the respective cabinet series. Above 630 A rated current, the procedure according to 10.10.4.3 (DIN EN 61439-1 supplementary sheet 2, DIN VDE 0660-600-1 supplementary sheet 2) must be applied

Interior expansion system CombiLine N

Rail-mounted devices row spacing 125 mm/150 mm

MG303

MG433

- Expansion with DIN rails 35 x 15 mm
- DIN rails with field width 3 and over, with additional stabilization rail
- For installation devices according to DIN 43880
- The mounting frame must be ordered separately

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
Row spacing 125 mm											
1	150	1	250	12	●	●	120	MBG101	2CPX041650R9999	MG101	2CPX041200R9999
		2	500	24	●	●	120	MBG201	2CPX041651R9999	MG201	2CPX041201R9999
		3	750	36	●	●	120	MBG301	2CPX041652R9999	MG301	2CPX041202R9999
2	300	1	250	24	●	●	120	MBG102	2CPX041653R9999	MG102	2CPX041203R9999
		2	500	48	●	●	120	MBG202	2CPX041655R9999	MG202	2CPX041205R9999
		3	750	72	●	●	120	MBG302	2CPX041657R9999	MG302	2CPX041207R9999
3	450	1	250	36	●	●	120	MBG103	2CPX041659R9999	MG103	2CPX041209R9999
		2	500	72	●	●	120	MBG203	2CPX041661R9999	MG203	2CPX041211R9999
		3	750	108	●	●	120	MBG303	2CPX041663R9999	MG303	2CPX041213R9999
4	600	1	250	48	●	●	120	MBG104	2CPX041665R9999	MG104	2CPX041215R9999
		2	500	96	●	●	120	MBG204	2CPX041667R9999	MG204	2CPX041217R9999
		3	750	144	●	●	120	MBG304	2CPX041669R9999	MG304	2CPX041219R9999
5	750	1	250	60	●	●	120	MBG105	2CPX041671R9999	MG105	2CPX041221R9999
		2	500	120	●	●	120	MBG205	2CPX041673R9999	MG205	2CPX041223R9999
		3	750	180	●	●	120	MBG305	2CPX041675R9999	MG305	2CPX041225R9999
Row spacing 150 mm											
1	150	1	250	12	●	●	120	MBG101	2CPX041650R9999	MG101	2CPX041200R9999
		2	500	24	●	●	120	MBG201	2CPX041651R9999	MG201	2CPX041201R9999
		3	750	36	●	●	120	MBG301	2CPX041652R9999	MG301	2CPX041202R9999
2	300	1	250	24	●	●	120	MBG412	2CPX041654R9999	MG412	2CPX041204R9999
		2	500	48	●	●	120	MBG422	2CPX041656R9999	MG422	2CPX041206R9999
		3	750	72	●	●	120	MBG432	2CPX041658R9999	MG432	2CPX041208R9999
3	450	1	250	36	●	●	120	MBG413	2CPX041660R9999	MG413	2CPX041210R9999
		2	500	72	●	●	120	MBG423	2CPX041662R9999	MG423	2CPX041212R9999
		3	750	108	●	●	120	MBG433	2CPX041664R9999	MG433	2CPX041214R9999
4	600	1	250	48	●	●	120	MBG414	2CPX041666R9999	MG414	2CPX041216R9999
		2	500	96	●	●	120	MBG424	2CPX041668R9999	MG424	2CPX041218R9999
		3	750	144	●	●	120	MBG434	2CPX041670R9999	MG434	2CPX041220R9999
5	750	1	250	60	●	●	120	MBG415	2CPX041672R9999	MG415	2CPX041222R9999
		2	500	120	●	●	120	MBG425	2CPX041674R9999	MG425	2CPX041224R9999
		3	750	180	●	●	120	MBG435	2CPX041676R9999	MG435	2CPX041226R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Touch protection

MB218

- Module as touch protection or to expand with system parts
- The mounting frame must be ordered separately

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
1	150	1	250	12	●	●	120	MBB116	2CPX041722R9999	MB116	2CPX041257R9999
		2	500	24	●	●	120	MBB216	2CPX041723R9999	MB216	2CPX041258R9999
		3	750	36	●	●	120	MBB316	2CPX041724R9999	MB316	2CPX041259R9999
2	300	1	250	24	●	●	120	MBB117	2CPX041725R9999	MB117	2CPX041260R9999
		2	500	48	●	●	120	MBB217	2CPX041726R9999	MB217	2CPX041261R9999
		3	750	72	●	●	120	MBB317	2CPX041727R9999	MB317	2CPX041262R9999
3	450	1	250	36	●	●	120	MBB118	2CPX041728R9999	MB118	2CPX041263R9999
		2	500	72	●	●	120	MBB218	2CPX041729R9999	MB218	2CPX041264R9999
		3	750	108	●	●	120	MBB318	2CPX041730R9999	MB318	2CPX041265R9999
4	600	1	250	48	●	●	120	MBB119	2CPX041731R9999	MB119	2CPX041266R9999
		2	500	96	●	●	120	MBB219	2CPX041732R9999	MB219	2CPX041267R9999
		3	750	144	●	●	120	MBB319	2CPX041733R9999	MB319	2CPX041268R9999
5	750	1	250	60	●	●	120	MBB120	2CPX041734R9999	MB120	2CPX041269R9999
		2	500	120	●	●	120	MBB220	2CPX041735R9999	MB220	2CPX041270R9999
		3	750	180	●	●	120	MBB320	2CPX041736R9999	MB320	2CPX041271R9999

MB200

- Touch protection cover, including cover bracket
- Covers are not in the 150 mm grid
- 2 pieces must always be used per module control panel in order to get back to a grid unit
- The mounting frame must be ordered separately

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
0.5	75	1	250	6	●	●	120	MBB100	2CPX041427R9999	MB100	2CPX041422R9999
		2	500	12	●	●	120	MBB200	2CPX041428R9999	MB200	2CPX041423R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Mounting plates

MM213

- Mounting plates made of sheet steel, 2 mm
- Mounting plates that are variably adjustable in depth via the deep angle piece ZW59P2
- Usable depth from 103 mm to 158 mm
- Usable width for equipment: 1-field width 188 mm, 2-field width 438 mm, 3-field width 688 mm
- The mounting frame must be ordered separately

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
1	150	1	250	12	●	●	215	MBM111	2CPX041707R9999	MM111	2CPX041242R9999
		2	500	24	●	●	215	MBM211	2CPX041708R9999	MM211	2CPX041243R9999
		3	750	36	●	●	215	MBM311	2CPX041709R9999	MM311	2CPX041244R9999
2	300	1	250	24	●	●	215	MBM112	2CPX041710R9999	MM112	2CPX041245R9999
		2	500	48	●	●	215	MBM212	2CPX041711R9999	MM212	2CPX041246R9999
		3	750	72	●	●	215	MBM312	2CPX041712R9999	MM312	2CPX041247R9999
3	450	1	250	36	●	●	215	MBM113	2CPX041713R9999	MM113	2CPX041248R9999
		2	500	72	●	●	215	MBM213	2CPX041714R9999	MM213	2CPX041249R9999
		3	750	108	●	●	215	MBM313	2CPX041715R9999	MM313	2CPX041250R9999
4	600	1	250	48	●	●	215	MBM114	2CPX041716R9999	MM114	2CPX041251R9999
		2	500	96	●	●	215	MBM214	2CPX041717R9999	MM214	2CPX041252R9999
		3	750	144	●	●	215	MBM314	2CPX041718R9999	MM314	2CPX041253R9999
5	750	1	250	60	●	●	215	MBM115	2CPX041719R9999	MM115	2CPX041254R9999
		2	500	120	●	●	215	MBM215	2CPX041720R9999	MM215	2CPX041255R9999
		3	750	180	●	●	215	MBM315	2CPX041721R9999	MM315	2CPX041256R9999

MM113K

- Mounting plates made of sheet steel, 2 mm
- Mounting plate firmly attached
- Usable depth of 82 mm
- Usable width for equipment: 1-field width 200 mm
- The mounting frame must be ordered separately

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	24	●	●	120	MBM112K	2CPX041640R9999	MM112K	2CPX041117R9999
3	450	1	250	36	●	●	120	MBM113K	2CPX041641R9999	MM113K	2CPX041118R9999
4	600	1	250	48	●	●	120	MBM114K	2CPX041642R9999	MM114K	2CPX041119R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Horizontal terminal blocks

MK208

- With horizontally-arranged DIN rails 35 x 15 mm
- DIN rails variably-adjustable in depth
- Usable depth for ZW39P2 from 68 mm to 115 mm
- Usable depth for ZW59P2 from 90 mm to 145 mm
- Usable width for terminal blocks: 1-field width 188 mm, 2-field width 438 mm, 3-field width 688 mm
- Tiered delivery state
- Row spacing 150 mm (can be moved when it is needed)
- For grounded and insulated setup ⏚
- The mounting frame must be ordered separately
- **Note:** The upper DIN rail is attached with at least a shorter deep angle piece (ZW39P2)
- **Modules setup:**
  1 row: 1 X ZW39P2
  2 rows: 1 X ZW39P2, 1 X ZW59P2
  3 rows: 2 X ZW39P2, 1 X ZW59P2
  4 rows: 2 X ZW39P2, 2 X ZW59P2
  5 rows: 2 X ZW39P2, 3 X ZW59P2

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
1	150	1	250	12	●	●	215	MBK106	2CPX041677R9999	MK106	2CPX041227R9999
		2	500	24	●	●	215	MBK206	2CPX041679R9999	MK206	2CPX041228R9999
		3	750	36	●	●	215	MBK306	2CPX041681R9999	MK306	2CPX041229R9999
2	300	1	250	24	●	●	215	MBK107	2CPX041683R9999	MK107	2CPX041230R9999
		2	500	48	●	●	215	MBK207	2CPX041685R9999	MK207	2CPX041231R9999
		3	750	72	●	●	215	MBK307	2CPX041687R9999	MK307	2CPX041232R9999
3	450	1	250	36	●	●	215	MBK108	2CPX041689R9999	MK108	2CPX041233R9999
		2	500	72	●	●	215	MBK208	2CPX041691R9999	MK208	2CPX041234R9999
		3	750	108	●	●	215	MBK308	2CPX041693R9999	MK308	2CPX041235R9999
4	600	1	250	48	●	●	215	MBK109	2CPX041695R9999	MK109	2CPX041236R9999
		2	500	96	●	●	215	MBK209	2CPX041697R9999	MK209	2CPX041237R9999
		3	750	144	●	●	215	MBK309	2CPX041699R9999	MK309	2CPX041238R9999
5	750	1	250	60	●	●	215	MBK110	2CPX041701R9999	MK110	2CPX041239R9999
		2	500	120	●	●	215	MBK210	2CPX041703R9999	MK210	2CPX041240R9999
		3	750	180	●	●	215	MBK310	2CPX041705R9999	MK310	2CPX041241R9999

Interior expansion system CombiLine N

Horizontal / vertical terminal blocks

MK108K

- With horizontally-arranged DIN rails 35 x 7.5 mm
- DIN rails firmly attached via insulator piece ZK90P2
- Usable depth of 51 mm
- Usable width for terminal blocks: 1-field width 214 mm, 2-field width 464 mm
- Tiered delivery state
- Row spacing 150 mm (can be moved when it is needed)
- For insulated setup ⧈
- The mounting frame must be ordered separately

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
1	150	1	250	12	●	●	120	MBK106K	2CPX041632R9999	MK106K	2CPX041112R9999
		2	500	24	●	●	120	MBK206K	2CPX041633R9999	MK206K	2CPX041113R9999
2	300	1	250	24	●	●	120	MBK107K	2CPX041634R9999	MK107K	2CPX041114R9999
		2	500	48	●	●	120	MBK207K	2CPX041635R9999	MK207K	2CPX041115R9999
3	450	1	250	36	●	●	120	MBK108K	2CPX041636R9999	MK108K	2CPX041116R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MK213

- With vertically-arranged DIN rails 35 x 15 mm
- DIN rails that are variably adjustable in depth via the deep angle piece ZW39P2
- Usable depth from 66 mm to 113 mm
- Usable height for terminal blocks: 2 GU 244 mm, 3 GU 438 mm, 4 GU 591 mm
- For grounded and insulated setup ⏚
- The mounting frame must be ordered separately

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	24	●	●	215	MBK112	2CPX041837R9999	MK112	2CPX041127R9999
		2	500	48	●	●	215	MBK212	2CPX041838R9999	MK212	2CPX041128R9999
		3	750	72	●	●	215	MBK312	2CPX041839R9999	MK312	2CPX041129R9999
3	450	1	250	36	●	●	215	MBK113	2CPX041840R9999	MK113	2CPX041130R9999
		2	500	72	●	●	215	MBK213	2CPX041841R9999	MK213	2CPX041131R9999
		3	750	108	●	●	215	MBK313	2CPX041842R9999	MK313	2CPX041132R9999
4	600	1	250	48	●	●	215	MBK114	2CPX041843R9999	MK114	2CPX041133R9999
		2	500	96	●	●	215	MBK214	2CPX041844R9999	MK214	2CPX041134R9999
		3	750	144	●	●	215	MBK314	2CPX041845R9999	MK314	2CPX041135R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Busbar system 40 mm, horizontal, M(B)S...24

MS324

- Busbar center distance 40 mm
- For maximum 5-pole busbars, see below
- With busbar bracket type ZB5
- With end cover type ZX172
- Additionally braced in the middle from 3-field width
- Rated current (I_n) max. 360 A
- **Important**: note the possibility to combine modules with the TwinLine cabinet row mountings
- The mounting frame must be ordered separately

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	24	●	●	215*1	MBS124	2CPX041737R9999	MS124	2CPX041272R9999
		2	500	48	●	●	215*1	MBS224	2CPX041738R9999	MS224	2CPX041273R9999
		3	750	72	●	●	225*1	MBS324	2CPX041739R9999	MS324	2CPX041274R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

ZX2015

- Busbars for individual cabinet installation
- It is possible to combine different module widths within the cabinet with continuous busbars
- A maximum of 5 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
12 x 5	250	1	181	1	ZX2001	2CPX042200R9999	ZXM2001	2CPX042300R9999
		2	431	1	ZX2002	2CPX042201R9999	ZXM2002	2CPX042301R9999
		3	681	1	ZX2003	2CPX042202R9999	ZXM2003	2CPX042302R9999
		4	931	1	ZX2004	2CPX042203R9999	ZXM2004	2CPX042303R9999
		5	1181	1	ZX2005	2CPX042204R9999	ZXM2005	2CPX042304R9999
		6	1431	1	ZX2006	2CPX042792R9999	ZXM2006	2CPX042814R9999
12 x 10	360	1	181	1	ZX2007	2CPX042205R9999	ZXM2007	2CPX042305R9999
		2	431	1	ZX2008	2CPX042206R9999	ZXM2008	2CPX042306R9999
		3	681	1	ZX2009	2CPX042207R9999	ZXM2009	2CPX042307R9999
		4	931	1	ZX2010	2CPX042208R9999	ZXM2010	2CPX042308R9999
		5	1181	1	ZX2011	2CPX042209R9999	ZXM2011	2CPX042309R9999
		6	1431	1	ZX2012	2CPX042793R9999	ZXM2012	2CPX042815R9999
20 x 5	320	1	181	1	ZX2013	2CPX042210R9999	ZXM2013	2CPX042310R9999
		2	431	1	ZX2014	2CPX042211R9999	ZXM2014	2CPX042311R9999
		3	681	1	ZX2015	2CPX042212R9999	ZXM2015	2CPX042312R9999
		4	931	1	ZX2016	2CPX042213R9999	ZXM2016	2CPX042313R9999
		5	1181	1	ZX2017	2CPX042214R9999	ZXM2017	2CPX042314R9999
		6	1431	1	ZX2018	2CPX042794R9999	ZXM2018	2CPX042816R9999

Interior expansion system CombiLine N

Busbar system 60 mm, horizontal, M(B)S...27

MS327

- Busbar center distance 60 mm
- For 3-pole busbars, see below
- With busbar bracket type ZX151
- Additionally braced in the middle from 3-field width
- Rated current (I_n) max. 630 A
- **Important**: note the possibility to combine modules with the TwinLine cabinet row mountings
- The mounting frame must be ordered separately

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	24	●	●	215*1	MBS127	2CPX041740R9999	MS127	2CPX041275R9999
		2	500	48	●	●	215*1	MBS227	2CPX041741R9999	MS227	2CPX041276R9999
		3	750	72	●	●	225*1	MBS327	2CPX041742R9999	MS327	2CPX041277R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

ZX2027

- Busbars for individual cabinet installation
- It is possible to combine different module widths within the cabinet with continuous busbars
- 3 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
30 x 5	440	1	184	1	ZX2019	2CPX042215R9999	ZXM2019	2CPX042315R9999
		2	434	1	ZX2020	2CPX042216R9999	ZXM2020	2CPX042316R9999
		3	684	1	ZX2021	2CPX042217R9999	ZXM2021	2CPX042317R9999
		4	934	1	ZX2022	2CPX042218R9999	ZXM2022	2CPX042318R9999
		5	1184	1	ZX2023	2CPX042219R9999	ZXM2023	2CPX042319R9999
		6	1434	1	ZX2024	2CPX042795R9999	ZXM2024	2CPX042817R9999
30 x 10	630	1	184	1	ZX2025	2CPX042220R9999	ZXM2025	2CPX042320R9999
		2	434	1	ZX2026	2CPX042221R9999	ZXM2026	2CPX042321R9999
		3	684	1	ZX2027	2CPX042222R9999	ZXM2027	2CPX042322R9999
		4	934	1	ZX2028	2CPX042223R9999	ZXM2028	2CPX042323R9999
		5	1184	1	ZX2029	2CPX042224R9999	ZXM2029	2CPX042324R9999
		6	1434	1	ZX2030	2CPX042796R9999	ZXM2030	2CPX042818R9999

Interior expansion system CombiLine N

Busbar system 100 mm, horizontal, M(B)S...31

MS331

- Busbar center distance 100 mm
- For 3-pole busbars, see below
- With busbar bracket type ZX520
- Rated current (I_n) 850 A
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	36		●	275	MBS131	2CPX041743R9999	MS131	2CPX041278R9999
		2	500	72		●	275	MBS231	2CPX041744R9999	MS231	2CPX041279R9999
		3	750	108		●	275	MBS331	2CPX041745R9999	MS331	2CPX041280R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

ZX2033

- Busbars for individual cabinet installation
- It is possible to combine different module widths within the cabinet with continuous busbars
- 3 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
40 x 10	850	1	184	1	ZX2031	2CPX042225R9999	ZXM2031	2CPX042325R9999
		2	434	1	ZX2032	2CPX042226R9999	ZXM2032	2CPX042326R9999
		3	684	1	ZX2033	2CPX042227R9999	ZXM2033	2CPX042327R9999
		4	934	1	ZX2034	2CPX042228R9999	ZXM2034	2CPX042328R9999
		5	1184	1	ZX2035	2CPX042229R9999	ZXM2035	2CPX042329R9999
		6	1434	1	ZX2036	2CPX042797R9999	ZXM2036	2CPX042819R9999

Interior expansion system CombiLine N

Busbar system, vertical, M(B)S...28, M(B)W103, M(B)W204

MS128

- With 4-pole busbars 30 x 5 mm, bores with M6 thread as well as connection with M8 press-in nuts for access
- With busbar bracket type ZX518
- Rated current (I_n) 440 A
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	24	●	●	200	MBS128	2CPX041648R9999	MS128	2CPX041123R9999
3	450	2	500	72	●	●	200	MBS228	2CPX041649R9999	MS228	2CPX041124R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MBW250A

- With 3-pole busbars 30 x 5 mm and removable transformer supports
- With busbar bracket ZX146
- With deep angle piece ZW59P2
- With bus-mounting fuse socket E27, width 42 mm 3-pole
- With cover with transparent panel
- Rated current (I_n) 250 A
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
Re	mm	FB	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	36	●	●	215	MBW250A	2CPX042102R9999	-	-

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Busbar system, vertical, M(B)W103, M(B)W204

MBW103

- For 3-pole busbars 30 x 5 or 30 x 10 mm or the other Module 40 x 10 or 50 x 10 mm and removable transformer supports
- With busbar bracket ZX146 or ZX520
- With cover panel
- Rated current up to (I_n) up to 630 A or 1000 A
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width					From cabinet depth		Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Piece	Type	Order code	Type	Order code
3	450	1	250	36		●	275	1	MBW103	2CPX042047R9999	MW103	2CPX042044R9999
4	600	2	500	96		●	275	1	MBW204	2CPX042014R9999	MW204	2CPX042017R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

ZX3010

WZC2U

- Busbars for comm.meterng module
- 1 set of 6 Cu rails is required per module
- 1 set = 6 Cu rails ready for assembly with instrument transformer tab according to DIN 42600-2 form A or B and C
- Scope of delivery for ZX... types contains all mounting material for transducer rails WZC...

Height x depth	Width	In		Number of rails	Fits to	Surface	Kit not installed		Mounted and installed in the cabinet	
mm	mm	A	Set	Pcs			Type	Order code	Type	Order code
30 x 5		440	1	6	M(B)W103		ZX3005	2CPX042048R9999	ZXM3005	2CPX042045R9999
30 x 10		630	1	6	M(B)W103		ZX3010	2CPX042049R9999	ZXM3010	2CPX042046R9999
30 x 10	170	630	1	3	M(B)W103	Nickel-plated	WZC2U	2CPX056168R9999		
40 x 10	170	800	1	3	M(B)W103	Nickel-plated	WZCU2U1	2CPX056169R9999		
40 x 10		800	1	6	M(B)W204		ZX4010	2CPX042016R9999	ZXM4010	2CPX042018R9999
50 x 10		1000	1	6	M(B)W204		ZX5010	2CPX042015R9999	ZXM5010	2CPX042019R9999
40 x 10	250	800	1	3	M(B)W204	Nickel-plated	WZC2U2	2CPX056170R9999		
50 x 12	250	1000	1	3	M(B)W204	Nickel-plated	WZCU2W	2CPX056171R9999		

In addition to the ZX copper set, you can also order the WZC... transducer rails (DIN 42600-2 form A, 170 x ... x ... mm, or form B and C 250 x ... x ... mm)

Interior expansion system CombiLine N

N/PE busbar system, horizontal, M(B)N...69

MN369

- For 2-pole busbars, see below
- With busbar bracket type ZX518
- Additionally braced in the middle from 3-field width
- Rated current (I_n) max. 320 A
- The mounting frame must be ordered separately

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
1	150	1	250	12	●	●	215	MBN169	2CPX041424R9999	MN169	2CPX041419R9999
		2	500	24	●	●	215	MBN269	2CPX041425R9999	MN269	2CPX041420R9999
		3	750	36	●	●	215	MBN369	2CPX041426R9999	MN369	2CPX041421R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

ZX2066

- Busbars for individual cabinet installation
- It is possible to combine different module widths within the cabinet with continuous busbars
- 2 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
12 x 5	250	1	204	1	ZX2046	2CPX042538R9999	ZXM2046	2CPX042458R9999
		2	454	1	ZX2047	2CPX042539R9999	ZXM2047	2CPX042459R9999
		3	704	1	ZX2048	2CPX042540R9999	ZXM2048	2CPX042460R9999
		4	954	1	ZX2049	2CPX042541R9999	ZXM2049	2CPX042461R9999
		5	1204	1	ZX2050	2CPX042542R9999	ZXM2050	2CPX042462R9999
		6	1454	1	ZX2051	2CPX042798R9999	ZXM2051	2CPX042820R9999
20 x 5	320	1	204	1	ZX2064	2CPX042553R9999	ZXM2064	2CPX042473R9999
		2	454	1	ZX2065	2CPX042554R9999	ZXM2065	2CPX042474R9999
		3	704	1	ZX2066	2CPX042555R9999	ZXM2066	2CPX042475R9999
		4	954	1	ZX2067	2CPX042556R9999	ZXM2067	2CPX042476R9999
		5	1204	1	ZX2068	2CPX042557R9999	ZXM2068	2CPX042477R9999
		6	1454	1	ZX2069	2CPX042799R9999	ZXM2069	2CPX042821R9999

Interior expansion system CombiLine N

N/PE busbar system and terminal blocks, M(B)N...74+75

MN374

MN375

- For 2-pole busbars, see below
- With busbar bracket type ZX518
- With end cover type ZX519
- Additionally braced in the middle from 3-field width
- DIN rail that is variably adjustable in depth via the deep angle piece ZW59P2
- Usable depth from 90 mm to 145 mm
- Usable width for terminal blocks: 1-field width 188 mm, 2-field width 438 mm, 3-field width 688 mm
- Rated current (I_n) max. 440 A
- **Important**: note the possibility to combine modules with the TwinLine cabinet row mountings
- The mounting frame must be ordered separately

With one additional DIN rail for terminal blocks

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	24	●	●	215	MBN174	2CPX041746R9999	MN174	2CPX041281R9999
		2	500	48	●	●	215	MBN274	2CPX041748R9999	MN274	2CPX041282R9999
		3	750	72	●	●	215	MBN374	2CPX041750R9999	MN374	2CPX041283R9999
With two additional DIN rails for terminal blocks											
3	450	1	250	36	●	●	215	MBN175	2CPX041752R9999	MN175	2CPX041284R9999
		2	500	72	●	●	215	MBN275	2CPX041754R9999	MN275	2CPX041285R9999
		3	750	108	●	●	215	MBN375	2CPX041756R9999	MN375	2CPX041286R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

ZX1015

- Busbars for individual cabinet installation
- It is possible to combine different module widths within the cabinet with continuous busbars
- 2 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
12 x 5	250	1	246	1	ZX1001	2CPX041870R9999	ZXM1001	2CPX041480R9999
		2	496	1	ZX1002	2CPX041871R9999	ZXM1002	2CPX041481R9999
		3	746	1	ZX1003	2CPX041872R9999	ZXM1003	2CPX041482R9999
		4	996	1	ZX1004	2CPX041873R9999	ZXM1004	2CPX041483R9999
		5	1246	1	ZX1005	2CPX041874R9999	ZXM1005	2CPX041484R9999
		6	1496	1	ZX1006	2CPX042800R9999	ZXM1006	2CPX042822R9999
20 x 5	320	1	246	1	ZX1013	2CPX041882R9999	ZXM1013	2CPX041492R9999
		2	496	1	ZX1014	2CPX041883R9999	ZXM1014	2CPX041493R9999
		3	746	1	ZX1015	2CPX041884R9999	ZXM1015	2CPX041494R9999
		4	996	1	ZX1016	2CPX041885R9999	ZXM1016	2CPX041495R9999
		5	1246	1	ZX1017	2CPX041886R9999	ZXM1017	2CPX041496R9999
		6	1496	1	ZX1018	2CPX042801R9999	ZXM1018	2CPX042823R9999
30 x 5	440	1	246	1	ZX1019	2CPX041888R9999	ZXM1019	2CPX041498R9999
		2	496	1	ZX1020	2CPX041889R9999	ZXM1020	2CPX041499R9999
		3	746	1	ZX1021	2CPX041890R9999	ZXM1021	2CPX041500R9999
		4	996	1	ZX1022	2CPX041891R9999	ZXM1022	2CPX041501R9999
		5	1246	1	ZX1023	2CPX041892R9999	ZXM1023	2CPX041502R9999
		6	1496	1	ZX1024	2CPX042802R9999	ZXM1024	2CPX042824R9999

Interior expansion system CombiLine N

N/PE busbar system and terminal blocks, M(B)N...62+63

MN362

MN363

- For 2-pole busbars, see below
- With busbar bracket type ZX149
- Additionally braced in the middle from 3-field width
- DIN rail that is variably adjustable in depth via the deep angle piece ZW59P2
- Usable depth from 90 mm to 145 mm
- Usable width for terminal blocks: 1-field width 188 mm, 2-field width 438 mm, 3-field width 688 mm
- Rated current (I_n) 630 A
- **Important**: note the possibility to combine modules with the TwinLine cabinet row mountings
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

With one additional DIN rail for terminal blocks

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	24		●	275	MBN162	2CPX041758R9999	MN162	2CPX041287R9999
		2	500	48		●	275	MBN262	2CPX041760R9999	MN262	2CPX041288R9999
		3	750	72		●	275	MBN362	2CPX041762R9999	MN362	2CPX041289R9999
With two additional DIN rails for terminal blocks											
3	450	1	250	36		●	275	MBN163	2CPX041764R9999	MN163	2CPX041290R9999
		2	500	72		●	275	MBN263	2CPX041766R9999	MN263	2CPX041291R9999
		3	750	108		●	275	MBN363	2CPX041768R9999	MN363	2CPX041292R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

ZX2084

- Busbars for individual cabinet installation
- It is possible to combine different module widths within the cabinet with continuous busbars
- 2 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
30 x 10	630	1	201	1	ZX2082	2CPX042568R9999	ZXM2082	2CPX042488R9999
		2	451	1	ZX2083	2CPX042569R9999	ZXM2083	2CPX042489R9999
		3	701	1	ZX2084	2CPX042570R9999	ZXM2084	2CPX042490R9999
		4	951	1	ZX2085	2CPX042571R9999	ZXM2085	2CPX042491R9999
		5	1201	1	ZX2086	2CPX042572R9999	ZXM2086	2CPX042492R9999
		6	1451	1	ZX2087	2CPX042803R9999	ZXM2087	2CPX042825R9999

Interior expansion system CombiLine N

Busbar system 60 mm, horizontal, M(B)R...02(B)

MR302B

MR302

- Busbar center distance 60 mm
- For 3-pole busbars
- 32 mm spacing between copper rail and cover
- With busbar bracket type ZX146
- With end cover ZX172
- Additionally braced in the middle from 3-field width
- Rated current (I_n) max. 440 A
- Bus-mounting fuse socket, see below
- **Important**: note the possibility to combine modules with the TwinLine cabinet row mountings
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Populated module for equipment with vertically installed 3-pole bus-mounting fuse socket, I_n up to max. 250 A

Height		Width		Elements				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	D02	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	5*4	24	●	●	120	-	-	MR102B	2CPX041409R9999
		2	500	14*4	48	●	●	215	-	-	MR202B	2CPX041410R9999
		3	750	24*4	72	-	●	225	-	-	MR302B	2CPX041411R9999

Unpopulated module for equipment, for vertical installation of bus-mounting fuse sockets, D0 fuse switch disconnectors or NH00 fuse switch disconnector*3, I_n up to max. 440 A

Height		Width		Useful width				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	1 x 215*4	24	●	●	120*3	MBR102	2CPX041825R9999	MR102	2CPX041406R9999
		2	500	1 x 465*4	48	●	●	215*3	MBR202	2CPX041826R9999	MR202	2CPX041407R9999
		3	750	2 x 320*4	72	-	●	225*3	MBR302	2CPX041827R9999	MR302	2CPX041408R9999

*1 Expansion on EDF mounting frame | * 2 Expansion on WR mounting frame | * 3 The cabinet depth depends on the depth dimensions of the equipment (comparison of cabinet views with dimensions of the equipment) | * 4 The change useable width should be considered in the TwinLine busbar arrangement 166

ZE60

ZE61

ZE62

ZA4P10

Article	Unit	Type	Order code
Neozed bus-mounting fuse socket E18, width 26 mm For gauge ring inserts, 3-pole, with covers and nameplates, with E18 thread, safety fuse max. 63 A	1	ZE60	2CPX061045R9999
	10	ZE60P10	2CPX062400R9999
Diazed bus-mounting fuse socket E27, width 42 mm For gauge ring inserts, 3-pole, with covers and nameplates, with E27 thread, safety fuse max. 25 A	1	ZE61	2CPX061046R9999
Diazed bus-mounting fuse socket E33, width 56 mm For gauge ring inserts, 3-pole, with covers and nameplates, with E33 thread, safety fuse max. 63 A	1	ZE62	2CPX061047R9999
Shutters instead of bus-mounting fuse socket Color similar to RAL 7035, for compliance with the contact protection IPXXC Usable width from 16 mm to 34 mm	10	ZA4P10	2CPX062374R9999

Interior expansion system CombiLine N

Busbar system 60 mm horizontal, M(B)R...02

ZX1015

- Busbars for individual cabinet installation
- It is possible to combine different module widths within the cabinet with continuous busbars
- 3 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
12 x 5	(100)* 250	1	246	1	ZX1001	2CPX041870R9999	ZXM1001	2CPX041480R9999
		2	496	1	ZX1002	2CPX041871R9999	ZXM1002	2CPX041481R9999
		3	746	1	ZX1003	2CPX041872R9999	ZXM1003	2CPX041482R9999
		4	996	1	ZX1004	2CPX041873R9999	ZXM1004	2CPX041483R9999
		5	1246	1	ZX1005	2CPX041874R9999	ZXM1005	2CPX041484R9999
		6	1496	1	ZX1006	2CPX042800R9999	ZXM1006	2CPX042822R9999
20 x 5	(250)* 320	1	246	1	ZX1013	2CPX041882R9999	ZXM1013	2CPX041492R9999
		2	496	1	ZX1014	2CPX041883R9999	ZXM1014	2CPX041493R9999
		3	746	1	ZX1015	2CPX041884R9999	ZXM1015	2CPX041494R9999
		4	996	1	ZX1016	2CPX041885R9999	ZXM1016	2CPX041495R9999
		5	1246	1	ZX1017	2CPX041886R9999	ZXM1017	2CPX041496R9999
		6	1496	1	ZX1018	2CPX042801R9999	ZXM1018	2CPX042823R9999
30 x 5	(250)* 440	1	246	1	ZX1019	2CPX041888R9999	ZXM1019	2CPX041498R9999
		2	496	1	ZX1020	2CPX041889R9999	ZXM1020	2CPX041499R9999
		3	746	1	ZX1021	2CPX041890R9999	ZXM1021	2CPX041500R9999
		4	996	1	ZX1022	2CPX041891R9999	ZXM1022	2CPX041501R9999
		5	1246	1	ZX1023	2CPX041892R9999	ZXM1023	2CPX041502R9999
		6	1496	1	ZX1024	2CPX042802R9999	ZXM1024	2CPX042824R9999

* For expansion with bus-mounting fuse socket

Interior expansion system CombiLine N

Busbar system 60 mm horizontal, M(B)R...03

MR303

- Unpopulated for equipment for the vertical installation of D0 and NH fuse switch disconnectors or bus-mounting fuse sockets
- For 3-pole busbars, see below
- Spacing between copper rail and cover: For the equipment Efen and K'Electric 68 mm*3, Jean Müller and Wöhner 60.5 mm*3
- Cover without cutout, including extension frame
- With busbar bracket type ZX146
- Additionally braced in the middle from 3-field width
- Rated current (I_n) max. 630 A
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		Useful width				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	165	36	-	●	275*3	MBR103	2CPX041830R9999	MR103	2CPX041414R9999
		2	500	415	72	-	●	275*3	MBR203	2CPX041831R9999	MR203	2CPX041415R9999
		3	750	665	108	-	●	275*3	MBR303	2CPX041832R9999	MR303	2CPX041416R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame | *3 The cabinet depth depends on the depth dimensions of the equipment (comparison of cabinet views with dimensions of the equipment)

ZX2060

- Busbars for individual cabinet installation
- It is possible to combine different module widths within the cabinet with continuous busbars
- 3 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
12 x 5	250	1	195	1	ZX2040	2CPX042533R9999	ZXM2040	2CPX042453R9999
		2	445	1	ZX2041	2CPX042534R9999	ZXM2041	2CPX042454R9999
		3	695	1	ZX2042	2CPX042535R9999	ZXM2042	2CPX042455R9999
		4	945	1	ZX2043	2CPX042536R9999	ZXM2043	2CPX042456R9999
		5	1195	1	ZX2044	2CPX042537R9999	ZXM2044	2CPX042457R9999
		6	1445	1	ZX2045	2CPX042804R9999	ZXM2045	2CPX042826R9999
12 x 10	360	1	195	1	ZX2052	2CPX042543R9999	ZXM2052	2CPX042463R9999
		2	445	1	ZX2053	2CPX042544R9999	ZXM2053	2CPX042464R9999
		3	695	1	ZX2054	2CPX042545R9999	ZXM2054	2CPX042465R9999
		4	945	1	ZX2055	2CPX042546R9999	ZXM2055	2CPX042466R9999
		5	1195	1	ZX2056	2CPX042547R9999	ZXM2056	2CPX042467R9999
		6	1445	1	ZX2057	2CPX042805R9999	ZXM2057	2CPX042827R9999
20 x 5	320	1	195	1	ZX2058	2CPX042548R9999	ZXM2058	2CPX042468R9999
		2	445	1	ZX2059	2CPX042549R9999	ZXM2059	2CPX042469R9999
		3	695	1	ZX2060	2CPX042550R9999	ZXM2060	2CPX042470R9999
		4	945	1	ZX2061	2CPX042551R9999	ZXM2061	2CPX042471R9999
		5	1195	1	ZX2062	2CPX042552R9999	ZXM2062	2CPX042472R9999
		6	1445	1	ZX2063	2CPX042806R9999	ZXM2063	2CPX042828R9999
30 x 5	440	1	195	1	ZX2070	2CPX042558R9999	ZXM2070	2CPX042478R9999
		2	445	1	ZX2071	2CPX042559R9999	ZXM2071	2CPX042479R9999
		3	695	1	ZX2072	2CPX042560R9999	ZXM2072	2CPX042480R9999
		4	945	1	ZX2073	2CPX042561R9999	ZXM2073	2CPX042481R9999
		5	1195	1	ZX2074	2CPX042562R9999	ZXM2074	2CPX042482R9999
		6	1445	1	ZX2075	2CPX042807R9999	ZXM2075	2CPX042829R9999
30 x 10	630	1	195	1	ZX2076	2CPX042563R9999	ZXM2076	2CPX042483R9999
		2	445	1	ZX2077	2CPX042564R9999	ZXM2077	2CPX042484R9999
		3	695	1	ZX2078	2CPX042565R9999	ZXM2078	2CPX042485R9999
		4	945	1	ZX2079	2CPX042566R9999	ZXM2079	2CPX042486R9999
		5	1195	1	ZX2080	2CPX042567R9999	ZXM2080	2CPX042487R9999
		6	1445	1	ZX2081	2CPX042808R9999	ZXM2081	2CPX042830R9999

Interior expansion system CombiLine N

Busbar system 60 mm vertical, M(B)R...H

MR102H

- Unpopulated for equipment for the horizontal installation of bus-mounting fuse sockets, see below
- For 3-pole busbars, see below
- 32 mm spacing between copper rail and cover
- With busbar bracket type ZX146
- Rated current (I_n) max. 250 A
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		Cutout height in				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	1 x 134	24	●	●	120	MBR102H	2CPX041828R9999	MR102H	2CPX041412R9999
3	450	1	250	1 x 295	36	●	●	200	MBR103H	2CPX041829R9999	MR103H	2CPX041413R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

ZX2506

- Combinations of different module heights (see information in GU height) are possible within the cabinet with continuous busbars.
- 3 copper rails are required per module

Copper rail	I_n	Height			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
12x5,	100	2	178	1	ZX2500	2CPX042877R9999	ZXM2500	2CPX042867R9999
		3	328	1	ZX2501	2CPX042878R9999	ZXM2501	2CPX042868R9999
		4 (2GU + 2GU)	478	1	ZX2502	2CPX042879R9999	ZXM2502	2CPX042869R9999
		5 (2GU + 3GU)	628	1	ZX2503	2CPX042880R9999	ZXM2503	2CPX042870R9999
		6 (3GU + 3GU)	778	1	ZX2504	2CPX042881R9999	ZXM2504	2CPX042871R9999
20x5	250	2	178	1	ZX2505	2CPX042882R9999	ZXM2505	2CPX042872R9999
		3	328	1	ZX2506	2CPX042883R9999	ZXM2506	2CPX042873R9999
		4 (2GU + 2GU)	478	1	ZX2507	2CPX042884R9999	ZXM2507	2CPX042874R9999
		5 (2GU + 3GU)	628	1	ZX2508	2CPX042885R9999	ZXM2508	2CPX042875R9999
		6 (3GU + 3GU)	778	1	ZX2509	2CPX042886R9999	ZXM2509	2CPX042876R9999

ZE60

ZE61

ZE62

ZA4P10

Article	Unit	Type	Order code
Neozed bus-mounting fuse socket E18, width 26 mm For gauge ring inserts, 3-pole, with covers and nameplates, with E18 thread, safety fuse max. 63 A	1	ZE60	2CPX061045R9999
	10	ZE60P10	2CPX062400R9999
Diazed bus-mounting fuse socket E27, width 42 mm For gauge ring inserts, 3-pole, with covers and nameplates, with E27 thread, safety fuse max. 25 A	1	ZE61	2CPX061046R9999
Diazed bus-mounting fuse socket E33, width 56 mm For gauge ring inserts, 3-pole, with covers and nameplates, with E33 thread, safety fuse max. 63 A	1	ZE62	2CPX061047R9999
Shutters instead of bus-mounting fuse socket Color similar to RAL 7035, for compliance with the contact protection IPXXC	10	ZA4P10	2CPX062374R9999

Interior expansion system CombiLine N

NH00-fuse switch disconnector, M(B)T...35+36+37(B)

MT337B

- Populated with NH00 fuse switch disconnector 160 A type ZH411, with separator shutters
- With 320 A busbar system, 3-pole, M8 connection screws
- Rated current (I_n) max. 320 A
- **Important**: note the cabinet depth in the lock area
- Spacing from the front edge of the equipment to the cover: 37 mm
- The mounting frame must be ordered separately
- Not suitable for fire protection housing, except for module MT135B

Height		Width		With disconnector				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	NH00	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	1	24	●	●	200	-	-	MT135B	2CPX042451R9999
		1	250	2	24	●	●	200	-	-	MT136B	2CPX041293R9999
		2	500	4	48	●	●	200	-	-	MT236B	2CPX041294R9999
		3	750	6	72	●	●	200	-	-	MT336B	2CPX041295R9999
4	600	1	250	4	48	●	●	200	-	-	MT137B	2CPX041296R9999
		2	500	8	96	●	●	200	-	-	MT237B	2CPX041297R9999
		3	750	12	144	-	●	200	-	-	MT337B	2CPX041298R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MT337

- Unpopulated for NH00 fuse switch disconnectors 160 A, Makes: ABB (ZH411, ZH412), without separator shutters
- For 320 A busbar system, 3-pole
- Rated current (I_n) max. 320 A
- **Important**: note the cabinet depth in the lock area
- The mounting frame must be ordered separately
- Not suitable for fire protection housing, except for modules MBT135 and MT135

Height		Width		For disconnector				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	NH00	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	1	24	●	●	200	MBT135	2CPX042452R9999	MT135	2CPX042450R9999
		1	250	2	24	●	●	200	MBT136	2CPX041770R9999	MT136	2CPX041299R9999
		2	500	4	48	●	●	200	MBT236	2CPX041771R9999	MT236	2CPX041300R9999
		3	750	6	72	●	●	200	MBT336	2CPX041772R9999	MT336	2CPX041301R9999
4	600	1	250	4	48	●	●	200	MBT137	2CPX041773R9999	MT137	2CPX041302R9999
		2	500	8	96	●	●	200	MBT237	2CPX041774R9999	MT237	2CPX041303R9999
		3	750	12	144	-	●	200	MBT337	2CPX041775R9999	MT337	2CPX041304R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Accessories for NH00-fuse switch disconnector modules

ZH411

ZH412

ZH311

ZH312

ZH427

ZH430

ZX148

Article	Suitable for module	Unit	Type	Order code
NH00 fuse switch disconnector Rated current (I_n) max. 160 A, without separator shutters				
With M8 connection screws	M(B)T135 - M(B)T337	1	ZH411	2CPX062947R9999
With U-clamp terminals up to 50 mm²	M(B)T135 - M(B)T337	1	ZH412	2CPX062948R9999
NH00 busbar system Copper rails 20 x 5 mm, 3-pole Rated current (I_n) 320 A Single-story with M8 connection screws	M(B)T136	1	ZH214	2CPX060443R9999
	M(B)T236	1	ZH211	2CPX060440R9999
	M(B)T336	1	ZH311	2CPX060450R9999
NH00 busbar system Copper rails 20 x 5 mm, 3-pole Rated current (I_n) 320 A Double-story with M8 connection screws	M(B)T137	1	ZH216	2CPX060445R9999
	M(B)T237	1	ZH212	2CPX060441R9999
	M(B)T337	1	ZH312	2CPX060451R9999
Separator shutters For NH fuse switch disconnector, color similar to RAL 7035, for compliance with the contact protection IPXXC				
Single shutter	1 x M(B)T135 *	1	ZH425	2CPX062952R9999
Double shutter	1 x M(B)T136 * 2 x M(B)T236 * 2 x M(B)T137 * 4 x M(B)T237 *	1	ZH426	2CPX062953R9999
Triple shutter	2 x M(B)T336 * 4 x M(B)T337 *	1	ZH427	2CPX062954R9999
Separator shutters, closed Instead of NH fuse switch disconnector, color similar to RAL 7035, for compliance with the contact protection IPXXC				
Single shutter	M(B)T135 - M(B)T337	1	ZH428	2CPX062955R9999
Double shutter	M(B)T236 - M(B)T337	1	ZH429	2CPX062956R9999
Triple shutter	M(B)T336 - M(B)T337	1	ZH430	2CPX062957R9999
Insulation plate For non-allocated busbar ends with NH00 fuse switch disconnector	M(B)T135 - M(B)T337	1	ZX148	2CPX044018R9999

*Quantity per module when fully assembled

Interior expansion system CombiLine N

NH1-fuse switch disconnector, M(B)T...42+43(B)

MT343B

- Populated with NH1 fuse switch disconnector 250 A type ZH431, with separator shutters
- With 3-pole busbar system, M12 connection screws
- Rated current (I_n) max. 440 A, single-story
- Rated current (I_n) max. 630 A, double-story
- **Important**: note the cabinet depth in the lock area
- Spacing from the front edge of the equipment to the cover: 43 mm
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		With disconnector				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	NH1	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	1	36	●	●	200	-	-	MT142B	2CPX041305R9999
		2	500	2	72	●	●	200	-	-	MT242B	2CPX041306R9999
		3	750	3	108	-	●	225	-	-	MT342B	2CPX041307R9999
5	750	1	250	2	60	●	●	200	-	-	MT143B	2CPX041308R9999
		2	500	4	120	-	●	225	-	-	MT243B	2CPX041309R9999
		3	750	6	180	-	●	225	-	-	MT343B	2CPX041310R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MT343

- Unpopulated for NH1 fuse switch disconnectors 250 A, Makes: ABB (ZH431), without separator shutters
- For busbar system, 3-pole
- Rated current (I_n) max. 440 A, single-story
- Rated current (I_n) max. 630 A, double-story
  Important: note the cabinet depth in the lock area
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		For disconnector				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	NH1	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	1	36	●	●	200	MBT142	2CPX041776R9999	MT142	2CPX041311R9999
		2	500	2	72	●	●	200	MBT242	2CPX041777R9999	MT242	2CPX041312R9999
		3	750	3	108	-	●	225	MBT342	2CPX041778R9999	MT342	2CPX041313R9999
5	750	1	250	2	60	●	●	200	MBT143	2CPX041779R9999	MT143	2CPX041314R9999
		2	500	4	120	-	●	225	MBT243	2CPX041780R9999	MT243	2CPX041315R9999
		3	750	6	180	-	●	225	MBT343	2CPX041781R9999	MT343	2CPX041316R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Accessories for NH1-fuse switch disconnector modules

ZH431

ZH317

ZH318

ZH438

ZH440

ZX128

Article	Intended use	Unit	Type	Order code
NH1 fuse switch disconnector Rated current (I_n) max. 250 A, without separator shutters, with M10 connection screws	M(B)T142 - M(B) T343	1	ZH431	2CPX062958R9999
NH1/NH2 busbar system Copper rails 30 x 5 mm, 3-pole Rated current (I_n) 440 A Single-story with M10 connection screws	M(B)T242	1	ZH217	2CPX060446R9999
	M(B)T342	1	ZH317	2CPX060456R9999
NH1/NH2 busbar system Copper rails 30 x 10 mm, 3-pole Rated current (I_n) 630 A Double-story with M10 connection screws	M(B)T243	1	ZH218	2CPX060447R9999
	M(B)T343	1	ZH318	2CPX060457R9999
Separator shutter Single shutter for NH fuse switch disconnector, color similar to RAL 7035, for compliance with the contact protection IPXXC	1 x M(B)T142 * 2 x M(B)T242 * 3 x M(B)T342 * 2 x M(B)T143 * 4 x M(B)T243 * 6 x M(B)T343 *	1	ZH438	2CPX062961R9999
Separator shutter, closed Single shutter instead of NH fuse switch disconnector, color similar to RAL 7035, for compliance with the contact protection IPXXC	M(B)T142 - M(B) T343	1	ZH440	2CPX062963R9999
Insulation plate For non-allocated busbar ends with NH1 fuse switch disconnector	M(B)T142 - M(B) T343	1	ZX128	2CPX039128R9999

*Quantity per module when fully assembled

Interior expansion system CombiLine N

NH2-fuse switch disconnector, M(B)T...44+45(B)

MT345B

- Populated with NH2 fuse switch disconnector 400 A type ZH441, with separator shutters
- With 3-pole busbar system, M12 connection screws
- Rated current (I_n) max. 440 A, single-story
- Rated current (I_n) max. 630 A, double-story
- **Important**: note the cabinet depth in the lock area
- Spacing from the front edge of the equipment to the cover: 43 mm
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		With disconnector				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	NH2	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	1	36	●	●	215	-	-	MT144B	2CPX041317R9999
		2	500	2	72	●	●	215	-	-	MT244B	2CPX041318R9999
		3	750	3	108	-	●	225	-	-	MT344B	2CPX041319R9999
5	750	1	250	2	60	●	●	215	-	-	MT145B	2CPX041320R9999
		2	500	4	120	-	●	225	-	-	MT245B	2CPX041321R9999
		3	750	6	180	-	●	225	-	-	MT345B	2CPX041322R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MT345

- Unpopulated for NH2 fuse switch disconnectors 400 A, Makes: ABB (ZH441), without separator shutters
- For busbar system, 3-pole
- Rated current (I_n) max. 440 A, single-story
- Rated current (I_n) max. 630 A, double-story
- **Important**: note the cabinet depth in the lock area
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		For disconnector				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	NH2	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	1	36	●	●	215	MBT144	2CPX041782R9999	MT144	2CPX041323R9999
		2	500	2	72	●	●	215	MBT244	2CPX041783R9999	MT244	2CPX041324R9999
		3	750	3	108		●	225	MBT344	2CPX041784R9999	MT344	2CPX041325R9999
5	750	1	250	2	60	●	●	215	MBT145	2CPX041785R9999	MT145	2CPX041326R9999
		2	500	4	120	-	●	225	MBT245	2CPX041786R9999	MT245	2CPX041327R9999
		3	750	6	180	-	●	225	MBT345	2CPX041787R9999	MT345	2CPX041328R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Accessories for NH2-fuse switch disconnector modules

ZH441

ZH317

ZH318

ZH448

ZH442

ZX129

Article	Intended use	Unit	Type	Order code
NH2 fuse switch disconnector Rated current (I_n) max. 400 A, without separator shutters, with M12 connection screws	M(B)T144 - M(B)T345	1	ZH441	2CPX062964R9999
NH1/NH2 busbar system Copper rails 30 x 5 mm, 3-pole Rated current (I_n) 440 A Single-story with M10 connection screws	M(B)T244	1	ZH217	2CPX060446R9999
	M(B)T344	1	ZH317	2CPX060456R9999
NH1/NH2 busbar system Copper rails 30 x 10 mm, 3-pole Rated current (I_n) 630 A Double-story with M10 connection screws	M(B)T245	1	ZH218	2CPX060447R9999
	M(B)T345	1	ZH318	2CPX060457R9999
Separator shutters For NH fuse switch disconnector, color similar to RAL 7035, for compliance with the contact protection IPXXC				
Single shutter	1 x M(B)T144 * 2 x M(B)T145 *	1	ZH447	2CPX039842R9999
Single shutter	1 x M(B)T344 * 2 x M(B)T345 *	1	ZH448	2CPX062965R9999
Double shutter	1 x M(B)T244 * 1 x M(B)T344 * 2 x M(B)T245 * 2 x M(B)T345 *	1	ZH449	2CPX062966R9999
Separator shutter, closed Single shutter instead of NH fuse switch disconnector, color similar to RAL 7035, for compliance with the contact protection IPXXC	M(B)T144 - M(B)T345	1	ZH442	2CPX062939R9999
Insulation plate For non-allocated busbar ends with NH2 fuse switch disconnector	M(B)T144 - M(B)T345	1	ZX129	2CPX039129R9999

*Quantity per module when fully assembled

Notes

Interior expansion system CombiLine N

Busbar system 100 mm, NH00 switch disconnector, M(B)D...52(B)

MD352B

- Populated with InLine II NH00-100 fuse switch disconnection rails 160 A, Make: ABB
- Busbar center distance 100 mm
- For 3-pole, horizontally arranged busbars
- With busbar bracket type ZX520
- Rated current (I_n) max. 850 A
- **Important:**

1. The cabinet depth is to be noted in the lock area Spacing from the front edge of the equipment to the cover: 29 mm
2. The cable connection when using a middle rail or cross-profile rail in the direct connection is only possible to a limited extent with the use of a bridge clamp (plan for connection space, empty module)

- The mounting frame must be ordered separately
- The busbars must be ordered separately from the module
- Not suitable for fire protection housing
- Take additional connection room of at least 150 mm into consideration

Height		Width						From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	Equipment	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	3 x NH00	36	●	●	215	-	-	MD152B	2CPX042110R9999
		2	500	8 x NH00	72	●	●	215	-	-	MD252B	2CPX042111R9999
		3	750	12 x NH00	108	-	●	225	-	-	MD352B	2CPX042112R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

* 3 cable connection possible from top and bottom

MBD352

- Unpopulated for InLine II NH00-100 fuse switch disconnection rails 160 A, Make: ABB
- Busbar center distance 100 mm
- For 3-pole, horizontally arranged busbars
- With busbar bracket type ZX520 mounted on 3-stage assembly bracket ZW480
- Cover without cutout
- Rated current (I_n) max. 850 A
- Equipment, see catalog ABB STOTZ-KONTAKT InLine II
- **Important:** See remarks above

Height		Width		Useful width				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	150	36	●	●	215	MBD152	2CPX042116R9999	MD152	2CPX042113R9999
		2	500	300	72	●	●	215	MBD252	2CPX042117R9999	MD252	2CPX042114R9999
		3	750	500	108	-	●	225	MBD352	2CPX042118R9999	MD352	2CPX042115R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

* 3 cable connection possible from top and bottom

Interior expansion system CombiLine N

Busbar system 100 mm, NH00 switch disconnector, M(B)D...52(B)

ZXM1215

- Busbars for individual cabinet installation
- With the EDF and WR mounting frame, defined combinations (see info PW width) are possible within the cabinet. The different busbars can be connected via a connection set
- The NH00 fuse switch disconnection rails are mounted directly on the copper rails prepared with press-in nuts
- Set positions are specified for feeding in on copper rails
- 3 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
30 x 10	630	1	184	1	ZX1210	2CPX042121R9999	ZXM1210	2CPX042230R9999
		2	434	1	ZX1211	2CPX042122R9999	ZXM1211	2CPX042231R9999
		3	684	1	ZX1212	2CPX042123R9999	ZXM1212	2CPX042232R9999
40 x 10	850	1	184	1	ZX1213	2CPX042124R9999	ZXM1213	2CPX042233R9999
		2	434	1	ZX1214	2CPX042125R9999	ZXM1214	2CPX042234R9999
		3	684	1	ZX1215	2CPX042126R9999	ZXM1215	2CPX042235R9999

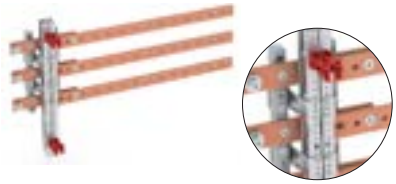

ZXM1217

- Busbar connection set (panel-panel connector)
- **Important:** Note the depth from the cabinet for the connection set
- 3 copper connection sets are required per connection
- The connection set is not possible for a cabinet depth of 215 mm

Copper rail	I_n	Width		Kit not installed		Mounted and installed in the cabinet	
mm	A	mm	Unit	Type	Order code	Type	Order code
30 x 10	630	230	1	ZX1216	2CPX042119R9999	ZXM1216	2CPX042236R9999
40 x 10	850	230	1	ZX1217	2CPX042120R9999	ZXM1217	2CPX042237R9999

ZE591M

ZX964

Article	Width in mm	Suitable for ...	Unit	Type	Order code
ZLBM00-100	50	MD...(H)B, M(B)D...	1	ZE591M	2CPX042959R9999
Blanking panels for sealing off reserve spaces 100 mm busbar center distance 50 mm width for sealing NH00 strips			1	ZX964	2CPX042238R9999

Interior expansion system CombiLine N / CombiLine-X

Busbar system 185 mm, NH switch disconnectors, M(B)D...21-300(B)

MD300B

- Populated with InLine II fuse switch disconnection rails **ZLBM**, Make: ABB
- NH00 in-line fused load break switches up to 160 A/ NH1 to 250 A
- Busbar center distance 185 mm
- For 3-pole, horizontally arranged busbars
- With busbar bracket type ZX522
- Rated current (I_n) max. 850 A
- **Important:** Plan for connection space or empty module and note the cabinet depth in the lock area*
- Spacing from the front edge of the equipment to the cover: NH00 – 60 mm/NH1-3 – 65 mm
- The busbars must be ordered separately from the module
- Not possible in combination with CombiLine-X

Height		Width						From cabinet depth	Kit not installed		Mounted and installed in the cabinet*3	
GU	mm	PW	mm	Equipment	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
5	750	1	250	4 x NH00	60	-	●	275*	-	-	MD100B	2CPX042240R9999
		2	500	8 x NH00	120	-	●	275*	-	-	MD200B	2CPX042241R9999
		3	750	12 x NH00	180	-	●	275*	-	-	MD300B	2CPX042242R9999
5	750	2	500	4 x NH1	120	-	●	275*	-	-	MD21B	2CPX042243R9999
		3	750	6 x NH1	180	-	●	275*	-	-	MD31B	2CPX042244R9999

* For double doors, a minimum cabinet depth of 325 mm is required | *1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame
*3 The module frame must be ordered separately | Not suitable for fire protection housing | *4 cable connection possible from top and bottom
1-panel wide modules can only be expanded in one direction in the cabinet (module-module)

MD300HB

- Populated with InLine II fuse switch disconnection rails **ZHBM**, Make: ABB NH00 in-line fused load break switches up to 160 A/NH1 up to 250 A
- Busbar center distance 185 mm
- For 3-pole, horizontally arranged busbars
- With busbar bracket type ZX522
- Rated current (I_n) max. 850 A
- **Important:** Plan for connection space or empty module and note the cabinet depth in the lock area*
- The busbars must be ordered separately from the module

Height		Width		Useful width				From cabinet depth	Kit not installed		Mounted and installed in the cabinet*3	
GU	mm	PW	mm	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
5	750	1	250	4 x NH00	60	-	●	350*	-	-	MD100HB	2CPX042245R9999
		2	500	8 x NH00	120	-	●	350*	-	-	MD200HB	2CPX042246R9999
		3	750	12 x NH00	180	-	●	350*	-	-	MD300HB	2CPX042247R9999
5	750	2	500	4 x NH1	120	-	●	350*	-	-	MD21HB	2CPX042248R9999
		3	750	6 x NH1	180	-	●	350*	-	-	MD31HB	2CPX042249R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame
*3 The module frame must be ordered separately | Not suitable for fire protection housing | *4 cable connection possible from top and bottom
1-panel wide modules can only be expanded in one direction in the cabinet (module-module)

ZX960 **ZX961**

Article	Unit	Type	Order code
Blanking panels for sealing off reserve spaces 185 mm busbar center distance			
50 mm width for sealing NH00 strips	1	ZX960	2CPX043180R9999
100 mm width for sealing NH1-3 strips	1	ZX961	2CPX043181R9999

Interior expansion system CombiLine N / CombiLine-X

Busbar system 185 mm, NH switch disconnectors, M(B)D...21-300(B)

MBD300

- Unpopulated for NH00 to NH3 fuse switch disconnection rails 160 A– 630 A, Make: ABB, **ZLBM** with 275 mm depth, ABB **ZHBM** with 350 mm depth
- Busbar center distance 185 mm
- For 3-pole, horizontally arranged busbars
- With busbar bracket type ZX522 mounted on 2-stage assembly bracket ZW481
- Cover without cutout
- Rated current (I_n) max. 850 A
- Equipment, see catalog ABB STOTZ-KONTAKT InLine II
- **Important:** See remark on next page for build-in components

Height		Width		Useful width				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
5	750	1	250	199.5	60	-	●	275/350*	MBD100	2CPX042255R9999	MD100	2CPX042258R9999
		2	500	399.5	120	-	●	275/350*	MBD200	2CPX042256R9999	MD200	2CPX042259R9999
		3	750	649	180	-	●	275/350*	MBD300	2CPX042257R9999	MD300	2CPX042260R9999

* For double doors, a minimum cabinet depth of 325 mm is required | *1 Expansion on EDF mounting frame | * 2 Expansion on WR mounting frame
1-panel wide modules can only be expanded in one direction in the cabinet (module-module)

ZX1228

- Busbars for individual cabinet installation
- It is possible to combine different module widths within the cabinet with continuous busbars
- With press-in nuts for connecting NH fuse switch disconnection rails
- The module sequence is defined by the press-in nuts from 3-field ready and greater (see info PW width)
- 3 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
30 x 10	630	1	215	1	ZX1220	2CPX042267R9999	ZXM1220	2CPX042285R9999
		2	465	1	ZX1221	2CPX042268R9999	ZXM1221	2CPX042286R9999
		3	715	1	ZX1222	2CPX042269R9999	ZXM1222	2CPX042287R9999
		4 (2PW+2PW)	965	1	ZX1223	2CPX042270R9999	ZXM1223	2CPX042288R9999
		5 (3PW+2PW)	1215	1	ZX1224	2CPX042271R9999	ZXM1224	2CPX042289R9999
		6 (3PW+3PW)	1465	1	ZX1225	2CPX042272R9999	ZXM1225	2CPX042290R9999
40 x 10	850	1	215	1	ZX1226	2CPX042273R9999	ZXM1226	2CPX042291R9999
		2	465	1	ZX1227	2CPX042274R9999	ZXM1227	2CPX042292R9999
		3	715	1	ZX1228	2CPX042275R9999	ZXM1228	2CPX042293R9999
		4 (2PW+2PW)	965	1	ZX1229	2CPX042276R9999	ZXM1229	2CPX042294R9999
		5 (3PW+2PW)	1215	1	ZX1230	2CPX042277R9999	ZXM1230	2CPX042295R9999
		6 (3PW+3PW)	1465	1	ZX1231	2CPX042278R9999	ZXM1231	2CPX042296R9999
50 x 10	1000	1	215	1	ZX1232	2CPX042279R9999	ZXM1232	2CPX042297R9999
		2	465	1	ZX1233	2CPX042280R9999	ZXM1233	2CPX042298R9999
		3	715	1	ZX1234	2CPX042281R9999	ZXM1234	2CPX042299R9999
		4 (2PW+2PW)	965	1	ZX1235	2CPX042282R9999	ZXM1235	2CPX042300R9999
		5 (3PW+2PW)	1215	1	ZX1236	2CPX042283R9999	ZXM1236	2CPX042301R9999
		6 (3PW+3PW)	1465	1	ZX1237	2CPX042284R9999	ZXM1237	2CPX042332R9999

* For double doors, a minimum cabinet depth of 325 mm is required | *1 Expansion on EDF mounting frame | * 2 Expansion on WR mounting frame

Interior expansion system CombiLine N / CombiLine-X

Busbar system 185 mm, NH switch disconnectors + EFM, M(B)D...21-300(B)

MD300EB

- Populated with InLine II fuse switch disconnection rails ZHBM,
  Make: ABB ZHBM + Electronic Fuse Monitoring (EFM)
  NH00 fuse switch disconnectors up to 160 A
  NH1 fuse-switch disconnectors up to 250 A
- Busbar center distance 185 mm
- For 3-pole, horizontally arranged busbars
- With busbar bracket type ZX522
- Rated current (I_n) max. 850 A
- **Important:** Plan for connection space or empty module and note the cabinet depth in the lock area*
- Spacing from the front edge of the equipment to the cover: NH00 – 60 mm/NH1-3 – 65 mm
- The mounting frame must be ordered separately
- The busbars must be ordered separately from the module
- Not suitable for fire protection housing
- Cable connection only possible from below

Height		Width		Useful width				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
6	900	1	250	4 x NH00	60	-	●	350	-	-	MD100EB	2CPX042250R9999
		2	500	8 x NH00	120	-	●	350	-	-	MD200EB	2CPX042251R9999
		3	750	12 x NH00	180	-	●	350	-	-	MD300EB	2CPX042252R9999
6	900	2	250	4 x NH1	120	-	●	350	-	-	MD21EB	2CPX042253R9999
		3	750	6 x NH1	180	-	●	350	-	-	MD31EB	2CPX042254R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame
1-panel wide modules can only be expanded in one direction in the cabinet (module-module)

ZE551M

ZE561M

ZE553M

ZE563M

Article	Width in mm	Suitable for ...	Unit	Type	Order code
ZLBM00	50	MD...(H)B, M(B)D...	1	ZE551M	2CPX042955R9999
ZLBM1	100	MD...(H)B, M(B)D...	1	ZE561M	2CPX042956R9999
ZLBM2	100	MD...(H)B, M(B)D...	1	ZE571M	2CPX042957R9999
ZLBM3	100	MD...(H)B, M(B)D...	1	ZE581M	2CPX042958R9999
ZHBM00	50	MD...(H)B, M(B)D...	1	ZE552M	2CPX042960R9999
ZHBM1	100	MD...(H)B, M(B)D...	1	ZE562M	2CPX042961R9999
ZHBM2	100	MD...(H)B, M(B)D...	1	ZE572M	2CPX042962R9999
ZHBM3	100	MD...(H)B, M(B)D...	1	ZE582M	2CPX042963R9999
ZHBM+EFM00	50	MD...(H)EB, M(B)D...E	1	ZE553M	2CPX042964R9999
ZHBM+EFM1	100	MD...(H)EB, M(B)D...E	1	ZE563M	2CPX042965R9999
ZHBM+EFM2	100	MD...(H)EB, M(B)D...E	1	ZE573M	2CPX042966R9999
ZHBM+EFM3	100	MD...(H)EB, M(B)D...E	1	ZE583M	2CPX042967R9999

ZX962

ZX963

Article	Unit	Type	Order code
Blanking panels for sealing off reserve spaces with height (EFM) 185 mm busbar center distance			
50 mm width for sealing NH00 strips	1	ZX962	2CPX042193R9999
100 mm width for sealing NH1-3 strips	1	ZX963	2CPX042194R9999

Interior expansion system CombiLine N / CombiLine-X

Busbar system 185 mm, NH switch disconnectors + EFM / ITS, M(B)D...21-300(B)

MBD300E

- Unpopulated for NH00 to NH3 fuse switch disconnection rails + EFM (or ITS), Make: ABB
- Busbar center distance 185 mm
- For 3-pole, horizontally arranged busbars
- With busbar bracket type ZX522 mounted on 3-stage assembly bracket ZW480
- Cover without cutout
- Rated current (I_n) max. 850 A
- Equipment, see catalog ABB STOTZ-KONTAKT InLine II
- **Important:** See remark on previous page for build-in components

Height		Width		Useful width				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
6	900	1	250	199.5	60	-	●	350	MBD100E	2CPX042261R9999	MD100E	2CPX042264R9999
		2	500	399.5	120	-	●	350	MBD200E	2CPX042262R9999	MD200E	2CPX042265R9999
		3	750	649	180	-	●	350	MBD300E	2CPX042263R9999	MD300E	2CPX042266R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame
1-panel wide modules can only be expanded in one direction in the cabinet (module-module)

ZX1228

- Busbars for individual cabinet installation
- It is possible to combine different module widths within the cabinet with continuous busbars
- With press-in nuts for connecting NH fuse switch disconnection rails
- The module sequence is defined by the press-in nuts from 3-field ready and greater (see info PW width)
- 3 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
30 x 10	630	1	215	1	ZX1220	2CPX042267R9999	ZXM1220	2CPX042285R9999
		2	465	1	ZX1221	2CPX042268R9999	ZXM1221	2CPX042286R9999
		3	715	1	ZX1222	2CPX042269R9999	ZXM1222	2CPX042287R9999
		4 (2PW+2PW)	965	1	ZX1223	2CPX042270R9999	ZXM1223	2CPX042288R9999
		5 (3PW+2PW)	1215	1	ZX1224	2CPX042271R9999	ZXM1224	2CPX042289R9999
		6 (3PW+3PW)	1465	1	ZX1225	2CPX042272R9999	ZXM1225	2CPX042290R9999
40 x 10	850	1	215	1	ZX1226	2CPX042273R9999	ZXM1226	2CPX042291R9999
		2	465	1	ZX1227	2CPX042274R9999	ZXM1227	2CPX042292R9999
		3	715	1	ZX1228	2CPX042275R9999	ZXM1228	2CPX042293R9999
		4 (2PW+2PW)	965	1	ZX1229	2CPX042276R9999	ZXM1229	2CPX042294R9999
		5 (3PW+2PW)	1215	1	ZX1230	2CPX042277R9999	ZXM1230	2CPX042295R9999
		6 (3PW+3PW)	1465	1	ZX1231	2CPX042278R9999	ZXM1231	2CPX042296R9999
50 x 10	1000	1	215	1	ZX1232	2CPX042279R9999	ZXM1232	2CPX042297R9999
		2	465	1	ZX1233	2CPX042280R9999	ZXM1233	2CPX042298R9999
		3	715	1	ZX1234	2CPX042281R9999	ZXM1234	2CPX042299R9999
		4 (2PW+2PW)	965	1	ZX1235	2CPX042282R9999	ZXM1235	2CPX042300R9999
		5 (3PW+2PW)	1215	1	ZX1236	2CPX042283R9999	ZXM1236	2CPX042301R9999
		6 (3PW+3PW)	1465	1	ZX1237	2CPX042284R9999	ZXM1237	2CPX042332R9999

* For double doors, a minimum cabinet depth of 325 mm is required | *1 Expansion on EDF mounting frame | * 2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Busbar system 185 mm for NH load break switch, M(B)L...5

ML35

- Unpopulated for load break switch NH00 to NH3 fuses 160 A to 630 A
- For make ABB SlimLine XR and Jean Müller Sasil
- Busbar center distance 185 mm
- For 3-pole horizontally arranged busbars, see below
- With busbar bracket type ZX523
- Cover without cutout
- Rated current (I_n) max. 850 A
- **Important:** Plan for connection space or empty module and note the cabinet depth in the lock area
- Spacing from the front edge of the equipment to the cover: 138 mm
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		Useful width				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
5	750	2	500	400	120	-	●	625	MBL25	2CPX041801R9999	ML25	2CPX041368R9999
		3	750	600	180	-	●	625	MBL35	2CPX041802R9999	ML35	2CPX041369R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

ZX1033

- Busbars for individual cabinet installation
- It is possible to combine different module widths within the cabinet with continuous busbars
- With clamping pins for affixing the busbars
- 3 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
40 x 10	850	2	496	1	ZX1032	2CPX041901R9999	ZXM1032	2CPX041511R9999
		3	746	1	ZX1033	2CPX041902R9999	ZXM1033	2CPX041512R9999
		4	996	1	ZX1034	2CPX041903R9999	ZXM1034	2CPX041513R9999
		5	1246	1	ZX1035	2CPX041904R9999	ZXM1035	2CPX041514R9999

Interior expansion system CombiLine N

Busbar system 40 mm for S750, M(B)H

MH251

- Unpopulated for main circuit breakers
- For make ABB S750, 1 to 3-pole (width per pole 27 mm)
- For modules with 1-field width, the feed-in occurs directly via the SH-switch with a maximum connection cross-section of 35 mm²/max. 100 A
- Busbar center distance 40 mm
- For 4-pole horizontally arranged busbars, see below
- With busbar bracket type ZB5
- Additionally braced in the middle from 3-field width
- Covers with cutout
- Rated current (I_n) max. 250 A
- The remaining cutout is closed with cover strips
- The mounting frame must be ordered separately
- The modules MBH351 and MH351 are not suitable for fire protection housing

2	300	1	250	161	24	●	●	200	MBH151	2CPX042031R9999	MH151	2CPX042026R9999
		2	500	161/161	48	●	●	200	MBH251	2CPX042032R9999	MH251	2CPX042027R9999
		3	750	322/242	72	●	●	200	MBH351	2CPX042033R9999	MH351	2CPX042028R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

ZX2041

- Busbar within the module
- A maximum of 5 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
12 x 5	250	1	195	1	ZX2040	2CPX042533R9999	ZXM2040	2CPX042453R9999
		2	445	1	ZX2041	2CPX042534R9999	ZXM2041	2CPX042454R9999
		3	695	1	ZX2042	2CPX042535R9999	ZXM2042	2CPX042455R9999

Interior expansion system CombiLine N

Power switch Tmax populated, MA...ALXB, MA...ALSB

MA250ALXB

- Populated with power switches, Make: ABB, Tmax XT1, XT3, 3-pole
- Fixed installation with rocker arm drive
- With thermomagnetic tripping device
- Covers with cutout
- Mounting on mounting cross beam
- **Note:** When directly using a center support rail or cross-profile rail, the cable connection can be realized with terminals (FC-CUAL). This and other accessories are to be ordered via ABB STOTZ-KONTAKT
- The mounting frame must be ordered separately
- Not suitable for fire protection housing, except for module MA100ALXB

Height		Width		I_n	Equipment				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	100	XT1B160R100	24	●	●	120	-	-	MA100ALXB	2CPX041471R9999
				160	XT1N160R160	24	●	●	200	-	-	MA160ALXB	2CPX041472R9999
				200	XT3N250R200	24	●	●	200	-	-	MA200ALXB	2CPX041473R9999
				250	XT3N250R250	24	●	●	200	-	-	MA250ALXB	2CPX041474R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Power switch Tmax unpopulated, M(B)A...T

MA290T

- Unpopulated for make ABB, fix-mounted installation Tmax XT1, 3-/4-pole, (76.2 mm/101.2 mm) or Tmax XT3, 3/4-pole, (105 mm/140 mm)
- Covers with cutout, remaining cutout must be closed with cover strips
- Rated current (I_n) max. 250 A
- With mounting cross beam, including slide nuts M4
- The mounting frame must be ordered separately
- Not suitable for fire protection housing, except for modules MBA190T and MA190T

Height		Width		Equipment	Cutout width	Useful width				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	Type	mm	mm	PLE	EDF *1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	XT1/XT3	216	199	24	●	●	120*3	MBA190T	2CPX041643R9999	MA190T	2CPX041120R9999
		2	500	XT1/XT3	421	449	48	●	●	215	MBA290T	2CPX041644R9999	MA290T	2CPX041417R9999
		3	750	XT1/XT3	687	699	72	-	●	275	MBA390T	2CPX041645R9999	MA390T	2CPX041418R9999

*1 Expansion on EDF mounting frame | * 2 Expansion on WR mounting frame | * 3 In the small distributor only 1 x Tmax XT1 with rocker arm and max. I_n up to 100 A

Interior expansion system CombiLine N

Power switch Tmax unpopulated, M(B)A...T

MA191T

- Unpopulated for make ABB, fix-mounted installation, Tmax XT2, 3-/4-pole, 90 mm/120 mm
  Tmax XT4, 3/4-pole, 105 mm/140 mm
- Covers with cutout
- With mounting cross beam, including slide nuts M4
- The mounting frame must be ordered separately
- Not suitable for fire protection housing, except for modules MBA191T and MA191T

Height		Width		I_n	Equipment					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	Polarity	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	160	XT2	3-poles	24	●	●	200	MBA191T	2CPX042841R9999	MA191T	2CPX042837R9999
2	300	1	250	160	XT2	4-poles	24	●	●	200	MBA194T	2CPX042906R9999	MA194T	2CPX043430R9999
3	450	1	250	250	XT4	3-poles	36	●	●	200	MBA193T	2CPX042844R9999	MA193T	2CPX042840R9999
3	450	1	250	250	XT4	4-poles	36	●	●	200	MBA196T	2CPX042908R9999	MA196T	2CPX043419R9999

MA291T

- Unpopulated for make ABB, fix-mounted installation, Tmax XT2, 3-/4-pole, 90 mm/120 mm
- Covers without cutout
- With mounting cross beam, including slide nuts M4
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		I_n	Equipment		Useful width				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	Polarity	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	2	500	250	XT2	3/4-pole	449	48	●	●	215	MBA291T	2CPX042842R9999	MA291T	2CPX042838R9999
2	300	3	750	250	XT2	3/4-pole	669	72	-	●	260	MBA391T	2CPX042843R9999	MA391T	2CPX042839R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Power switch Tmax unpopulated, M(B)A...T

MBA195T

- Unpopulated for make ABB, fix-mounted installation,
  Tmax XT2, 4-pole + 4-pole + RC Sel, 120 mm
  Tmax XT4, 4-pole + 4-pole + RC Sel, 140 mm
- Covers with cutout
- With mounting cross beam, including slide nuts M4
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		I_n	Equipment					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	Polarity	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	160	XT2	4-pole RC Sel	36	●	●	200	MBA195T	2CPX042907R9999	-	-
3	450	1	250	250	XT4	4-pole RC Sel	36	●	●	200	MBA197T	2CPX042909R9999	-	-

MA298XT

- Unpopulated for make ABB, fix-mounted installation
  Tmax XT5, 3-/4-pole, 140 mm/186 mm
  Tmax XT6, 3/4-pole, 210 mm/280 mm
- Covers with cutout
- With mounting cross beam, including slide nuts M4
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		I_n	Equipment					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	Polarity	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	400	XT5	3-polig	36	●	●	225	MBA192XT	2CPX043415R9999	MA192XT	2CPX043412R9999
		2	500	630	XT5	3-/4-polig	72	-	●	225	MBA292XT	2CPX043416R9999	MA292XT	2CPX043413R9999
4	600	2	500	800	XT6	3-/4-polig	96	-	●	225	MBA298XT	2CPX043418R9999	MA298XT	2CPX043414R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Load break switch OT populated, MA...ALAB

MA160ALAB

- Populated with load break switches, make ABB type OT160G, 3-pole
- Covers with cutout
- Assembly on DIN rails 35 x 15 mm
- The mounting frame must be ordered separately

Height		Width		I_n	Equipment				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	160	OT160G	24	●	●	200	-	-	MA160ALAB	2CPX041370R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MA630ALAB

- Equipped with load break switches, make ABB OT, type OT... E03P
- Covers with cutout
- Mounting on mounting cross beam
- The mounting frame must be ordered separately
- Not suitable for fire protection housing, except for modules MA200ALAB and MA250ALAB

Height		Width		I_n	Equipment				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	200	OT200E03P	24	●	●	200	-	-	MA200ALAB	2CPX041371R9999
				250	OT250E03P	24	●	●	200	-	-	MA250ALAB	2CPX041372R9999
3	450	2	500	400	OT400E03P	72	●	●	215	-	-	MA400ALAB	2CPX041373R9999
				630	OT630E03P	72	-	●	275	-	-	MA630ALAB	2CPX041374R9999
4	600	2	500	800	OT800E03P	72	-	●	325	-	-	MA800ALAB	2CPX041375R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Load break switch OT/OS/S750DR unpopulated, M(B)A...AL...

MA160ALA

- Unpopulated for load break switch, make ABB OT160M3 or main automatic fuse, make ABB S750DR
- 3-pole or 4-pole
- Covers without cutout
- Assembly on DIN rails 35 x 15 mm
- The mounting frame must be ordered separately

Height		Width		I_n	Useful width				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	160	216	24	●	●	200	MBA160ALA	2CPX041803R9999	MA160ALA	2CPX041376R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MA250ALA

- Unpopulated for load break switch, make ABB OT200E...P – OT630E...P
- 3-pole or 4-pole
- Covers without cutout
- Mounting on mounting cross beam
- The mounting frame must be ordered separately
- Not suitable for fire protection housing, except for modules MBA250ALA and MA250ALA

2	300	1	250	250	-	24	●	●	200	MBA250ALA	2CPX041804R9999	MA250ALA	2CPX041377R9999
3	450	2	500	630	-	72	-	●	275	MBA630ALA	2CPX041805R9999	MA630ALA	2CPX041378R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MBA250ALO

- Unpopulated for load break switch, make ABB OS
- Type OS160GD03PN3P for cabinet depth of 215 mm and above
- Type OS250GD03PN3P for cabinet depth of 225 mm and above
- Covers with cutout for rotary drive
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

3	450	1	250	250	-	36	●	●	215/225	MBA250ALO	2CPX042101R9999	-	-

*1 Ausbau auf EDF-Montagegerüst | *2 Ausbau auf WR-Montagegerüst

Interior expansion system CombiLine N

Universal switch modules, M(B)A...A/line connection M(B)V...

MA630A

MA800A

- Unpopulated, universally usable for different equipment
- Cover without cutout
- With deep cross beams for variable adjustment
- Attachment of equipment via cage nuts
- The mounting frame must be ordered separately
- Not suitable for fire protection housing, except for modules MBA250A and MA250A

Height		Width		I_n	Useful width	Useful depth				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	mm	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	250	170	122	24	●	●	200	MBA250A	2CPX041807R9999	MA250A	2CPX041387R9999
3	450	2	500	630	420	122	72	●	●	215	MBA630A	2CPX041808R9999	MA630A	2CPX041388R9999
4	600	2	500	800	420	147	96	-	●	275	MBA800A	2CPX041806R9999	MA800A	2CPX041389R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MA125ALT

- Unpopulated for make ABB, ATS Compact OTM40-125
- Covers with cutout, remaining cutout must be closed with cover strips
- Mounted on DIN-rail 35 x 15 mm
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		I_n	Equipment					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	Polarity	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
1	150	2	500	40–125	XT2	3-/4-	24	●	●	215	MBA125ALT	2CPX043423R9999	MA125ALT	2CPX042837R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MA400ALT

- Unpopulated for make ABB, ATS TruOne OX30-250, OX260-400, OX30-400
- Covers with cutout
- Mounted on mounting plate
- The mounting frame must be ordered separately
- Not suitable for fire protection housing

Height		Width		I_n	Equipment				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	Polarity	PLE	WR*2	mm	Type	Order code	Type	Order code
		2	500	250	OXB200-250	2-/4-	72	●	275	MBA250ALT	2CPX043427R9999	MA250ALT	2CPX043425R9999
1	150	2	500	400	OXB315-400	2-/3-	72	●	275	MBA400ALT	2CPX043424R9999	MA400ALT	2CPX043422R9999
		3	750	400	OXB315-400	3-/4-	108	●	275	MBA401ALT	2CPX043428R9999	MA401ALT	2CPX043426R9999

*2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Measuring devices/switch cabinet lighting, M(B)U...

MU257

- Unpopulated for 4 measuring devices with installation size 96 x 96 mm
- Arrangement of horizontal measuring devices
- Covers with cutout
- Mounting on mounting cross beam
- The mounting frame must be ordered separately

Height		Width		Measurement devices				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	Unit	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
1	150	2	500	4	24	●	●	225	MBU257	2CPX041809R9999	MU257	2CPX041390R9999
		3	750	4	36	●	●	225	MBU357	2CPX041810R9999	MU357	2CPX041391R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MU158

MU156

- Unpopulated for 1 or 4 measuring devices with installation size 96 x 96 mm
- At a height of 450 mm with additional DIN rail for rail-mounted devices 12 PLE
- Covers with cutout
- Mounting on mounting cross beam
- The mounting frame must be ordered separately
- M4M only possible in combination with M(B)U156

1	150	1	250	1	12	●	●	225	MBU156	2CPX042043R9999	MU156	2CPX042042R9999
2	300	1	250	4	24	●	●	225	MBU157	2CPX041811R9999	MU157	2CPX041392R9999
3	450	1	250	4	36	●	●	225	MBU158	2CPX041812R9999	MU158	2CPX041393R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MV281

- For the line link from the module to the switch cabinet door
- Covers with cutout for line connection
- With DIN rail and connection hose
- With accessories for securing the hose to the module and the switch cabinet door
- Note the door stop
- The mounting frame must be ordered separately
- Not suitable for fire protection housing
- Cannot be used in the H/HS cabinet

Height		Width		Hose diameter				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	∅	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
1	150	1	250	M20	12	●	●	225	MBV180	2CPX041815R9999	MV180	2CPX041396R9999
		1	250	M32	12	●	●	225	MBV181	2CPX041816R9999	MV181	2CPX041397R9999
		1	250	M40	12	●	●	225	MBV182	2CPX041817R9999	MV182	2CPX041398R9999
		2	500	M32	24	●	●	225	MBV281	2CPX041818R9999	MV281	2CPX041399R9999
		2	500	M40	24	●	●	225	MBV282	2CPX041819R9999	MV282	2CPX041400R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

Interior expansion system CombiLine N

Cable clamp rails, M(B)F...83+84

MF283

- With cable clamp rail for relieving the strain on cables and lines
- Including a cable clamp rail for bolt clamps, see below
- Covers without cutout
- For cabinet depths up to 275 mm
- Cable clamp rail that is variably adjustable in depth via the deep angle piece ZW59P2
- Usable depth from 87 mm to 142 mm
- The mounting frame must be ordered separately

Height		Width					From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
1	150	1	250	12	●	●	200	MBF183	2CPX041822R9999	MF183	2CPX041403R9999
		2	500	24	●	●	200	MBF283	2CPX041823R9999	MF283	2CPX041404R9999
		3	750	36	●	●	200	MBF383	2CPX041824R9999	MF383	2CPX041405R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MF284

- With cable clamp rail for relieving the strain on cables and lines
- Including a cable clamp rail for bolt clamps, see below
- Covers without cutout
- For cabinet depths up to 425 mm
- Cable clamp rail that is variably adjustable in depth via the deep angle piece ZW79P2
- Usable depth from 122 mm to 177 mm
- The mounting frame must be ordered separately

1	150	1	250	12	●	●	325	MBF184	2CPX041846R9999	MF184	2CPX041466R9999
		2	500	24	●	●	325	MBF284	2CPX041847R9999	MF284	2CPX041467R9999
		3	750	36	●	●	325	MBF384	2CPX041848R9999	MF384	2CPX041468R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

ZK143

ZK1431P100

Article	Unit	Type	Order code
Boltclamp For cable clamp rails			
from 22-28 mm	1	ZK143	2CPX060005R9999
from 40-46 mm	1	ZK144	2CPX060006R9999
from 64-70 mm	1	ZK145	2CPX060007R9999
Saddle clamps for bolt clamps			
For ZK143	100	ZK1431P100	2CPX060251R9999
For ZK144	100	ZK1441P100	2CPX060252R9999
For ZK145	50	ZK1451P50	2CPX060253R9999

Notes

Interior expansion system CombiLine N

Meter with three-point attachment and eHZ meter

MZ160

MZ161

- For meter with three-point attachment on counter carrying plate
- Only suitable for intermediate measurement
- With head part above and below
- Partitions may be necessary, single-story ZX70, double-story ZX72, see below
- The mounting frame must be ordered separately
- Not suitable for fire protection housing
- Observe planning information below

Height		Width		Meter				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	Unit	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
3	450	1	250	1	36	-	●	225	MBZ160	2CPX041820R9999	MZ160	2CPX041401R9999
5	750	1	250	2	60	-	●	225	MBZ161	2CPX041821R9999	MZ161	2CPX041402R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MZ162

MZ163

- For eHZ meter
- Only suitable for intermediate measurement
- For receiving eHZ cartridge (BKE-I), see below
- With head part above and below
- ZX69 partitions may be necessary, see below
- The mounting frame must be ordered separately
- Not suitable for fire protection housing
- Observe planning information below

2	300	1	250	1	24	-	●	225	MBZ162	2CPX042034R9999	MZ162	2CPX042029R9999
2	300	1	250	2	24	-	●	225	MBZ163	2CPX042035R9999	MZ163	2CPX042030R9999

*1 Expansion on EDF mounting frame *2 Expansion on WR mounting frame

Planning information: Note the switch cabinet depth, distance between meter support plate and door at:
TwinLine-G, 225 mm depth = 126.5 - 139 mm, TwinLine-L, 275 mm depth = 141.5 - 154 mm, TwinLine-W, 350 mm depth = 168 - 180.5 mm
TriLine®, 325 mm depth = 148 mm, TriLine®, 425 mm depth = 198 mm
Important: Plan at least one module each with a width of 250 mm above and below the meter support plate

Interior expansion system CombiLine N

Meter with three-point attachment and eHZ meter

MBZ170 / MBZ171 / MBZ172

- For meter with three-point attachment on counter carrying plate
- Only suitable for intermediate measurement
- With head part above and below
- Partitions may be necessary, single-story ZX70, double-story ZX72, see below
- The mounting frame must be ordered separately
- Not suitable for fire protection housing
- Observe planning information below

Height		Width		Meter				From cabinet depth	Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	Unit	PLE	EDF*1	WR*2	mm	Type	Order code	Type	Order code
2	300	1	250	1	24	-	●	225	MBZ170	2CPX044170R9999	MZ170	2CPX044175R9999
3	450	1	250	1	36	-	●	225	MBZ171	2CPX044171R9999	MZ171	2CPX044176R9999
5	750	1	250	2	60	-	●	225	MBZ172	2CPX044172R9999	MZ172	2CPX044177R9999

*1 Expansion on EDF mounting frame | *2 Expansion on WR mounting frame

MBZ173 / MBZ174

- For eHZ meter
- Only suitable for intermediate measurement
- For receiving eHZ cartridge (BKE-I), see below
- With head part above and below
- ZX69 partitions may be necessary, see below
- The mounting frame must be ordered separately
- Not suitable for fire protection housing
- Observe planning information below

3	450	1	250	1	36	-	●	225	MBZ173	2CPX044173R9999	MZ173	2CPX044178R9999
3	450	1	250	2	36	-	●	225	MBZ174	2CPX044174R9999	MZ174	2CPX044179R9999

*1 Expansion on EDF mounting frame *2 Expansion on WR mounting frame

ZX780 / ZX781 / ZX782

ZX70

VS659

Article	Height GU	OH	mm	Unit	Type	Order code
Vertical partitions, plastic For side touch protection in TwinLine-X, not fault arc-proof, to be ordered seperatly, only needed if meter panel is mounted on the side of TwinLine-X	2	000	300	1	ZX780	2CPX011012R9999
	3	0	450	1	ZX781	2CPX011013R9999
	5	1	750	1	ZX782	2CPX011014R9999
Vertical partitions, plastic Not fault arc-proof, separation from adjacent module, distribution panel, meter panel, partition is inserted in adjacent module in the cover bracket, color similar to RAL 7035	3	00	450	1	ZX69	2CPX039069R9999
	4	0	600	1	ZX70	2CPX039070R9999
	6	2	900	1	ZX72	2CPX039072R9999
eHZ cartridge (BKE-I) with long inlet and outlet lines For electronic household meter (eHZ) With inlet lines 10 mm² L1, L2, L3 and N, length 1000 mm without ferrules With outlet lines 10 mm² L1, L2 and L3, length 1000 mm without ferrules				1	VS659	2CPX039932R9999

Planning information: Note the switch cabinet depth, distance between meter support plate and door at:
TwinLine-G, 225 mm depth = 126.5 - 139 mm, TwinLine-L, 275 mm depth = 141.5 - 154 mm, TwinLine-W, 350 mm depth = 168 - 180.5 mm
TriLine®, 325 mm depth = 148 mm, TriLine®, 425 mm depth = 198 mm
Important: Plan at least one module each with a width of 250 mm above and below the meter support plate

Interior expansion system CombiLine N

SMISSLINE TP 125 A horizontal or vertical build-up

MC203HS

MC303HS

- SMISSLINE TP modules for hortzontal device arrangement
- Extension with DIN ralls 35 x 15 mm
- Distance between DIN ralls 150 mm
- From 3 panels on the DIN ralls are equipped with an additional stabilization rall
- **Important**: The SMISSLINE TP socket system cannot be connected through from one module to the next
- The mounting frame must be ordered separately

Height		Width					From cabinet depth		Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Unit	Type	Order code	Type	Order code
2	300	2	500	2x22	●	●	215	1	MBC202HS	2CPX042155R9999	MC202HS	2CPX042132R9999
	300	3	750	2x36	●	●	215	1	MBC302HS	2CPX042156R9999	MC302HS	2CPX042133R9999
3	450	2	500	3x22	●	●	215	1	MBC203HS	2CPX042157R9999	MC203HS	2CPX042134R9999
	450	3	750	3x36	●	●	215	1	MBC303HS	2CPX042158R9999	MC303HS	2CPX042135R9999
4	600	2	500	4x22	●	●	215	1	MBC204HS	2CPX042159R9999	MC204HS	2CPX042136R9999
	600	3	750	4x36	●	●	215	1	MBC304HS	2CPX042160R9999	MC304HS	2CPX042137R9999
5	750	2	500	5x22	●	●	215	1	MBC205HS	2CPX042161R9999	MC205HS	2CPX042138R9999
	750	3	750	5x36	●	●	215	1	MBC305HS	2CPX042162R9999	MC305HS	2CPX042139R9999

MC203VS

MC305VS

- SMISSLINE TP modules for vertical device arrangement
- Extension with DIN ralls 35 x 15 mm
- The DIN rall in the back are designed for standard N (N disconnection terminals) and PE terminals
- A cable laylng grid is included for cable fixing
- The DIN ralls and cable laying grids are flush with the module
- **Important**: Vertical cannot be mounted directly adjacent to horizontal cross members or centre support ralls
- The mounting frame must be ordered separately

Height		Width					From cabinet depth		Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Unit	Type	Order code	Type	Order code
3	450	1	250	1x22	●	●	275	1	MBC103VS	2CPX042163R9999	MC103VS	2CPX042140R9999
	450	2	500	2x22	●	●	275	1	MBC203VS	2CPX042164R9999	MC203VS	2CPX042141R9999
4	600	1	250	1x30	●	●	275	1	MBC104VS	2CPX042165R9999	MC104VS	2CPX042142R9999
	600	2	500	2x30	●	●	275	1	MBC204VS	2CPX042166R9999	MC204VS	2CPX042143R9999
	600	3	750	3x30	●	●	275	1	MBC304VS	2CPX042169R9999	MC304VS	2CPX042913R9999
5	750	1	250	1x38	●	●	275	1	MBC105VS	2CPX042167R9999	MC105VS	2CPX042144R9999
	750	2	500	2x38	●	●	275	1	MBC205VS	2CPX042168R9999	MC205VS	2CPX042145R9999
	750	3	750	3x38	●	●	275	1	MBC305VS	2CPX042911R9999	MC305VS	2CPX042910R9999

Interior expansion system CombiLine N

SMISSLINE TP 250 A horizontal or vertical build-up

MC203HP

- SMISSLINE TP modules for hortzontal device arrangement
- Extension with DIN ralls 35 x 15 mm
- Distance between DIN ralls 150 mm
- From 3 panels on the DIN ralls are equipped with an additional stabilization rall
- **Important**: The SMISSLINE TP busbar system cannot be connected through from one module to the next
- The mounting frame must be ordered separately

Height		Width					From cabinet depth		Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Unit	Type	Order code	Type	Order code
2	300	2	500	2x22	●	●	215	1	MBC202HP	2CPX043360R9999	MC202HP	2CPX043340R9999
	300	3	750	2x36	●	●	215	1	MBC302HP	2CPX043361R9999	MC302HP	2CPX043341R9999
3	450	2	500	3x22	●	●	215	1	MBC203HP	2CPX043362R9999	MC203HP	2CPX043342R9999
	450	3	750	3x36	●	●	215	1	MBC303HP	2CPX043363R9999	MC303HP	2CPX043343R9999
4	600	2	500	4x22	●	●	215	1	MBC204HP	2CPX043364R9999	MC204HP	2CPX043344R9999
	600	3	750	4x36	●	●	215	1	MBC304HP	2CPX043365R9999	MC304HP	2CPX043345R9999
5	750	2	500	5x22	●	●	215	1	MBC205HP	2CPX043366R9999	MC205HP	2CPX043346R9999
	750	3	750	5x36	●	●	215	1	MBC305HP	2CPX043367R9999	MC305HP	2CPX043347R9999

MC203VP

- SMISSLINE TP modules for vertical device arrangement
- Extension with DIN ralls 35 x 15 mm
- The DIN rall in the back are designed for standard N (N disconnection terminals) and PE terminals
- A cable laylng grid is included for cable fixing
- The DIN ralls and cable laying grids are flush with the module
- **Important**: Vertical modules cannot be mounted directly adjacent to horizontal cross members or centre support ralls
- The mounting frame must be ordered separately

Height		Width					From cabinet depth		Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	PLE	EDF*1	WR*2	mm	Unit	Type	Order code	Type	Order code
3	450	2	250	2x22	●	●	275	1	MBC203VP	2CPX043369R9999	MC203VP	2CPX043349R9999
4	600	2	250	2x30	●	●	275	1	MBC204VP	2CPX043371R9999	MC204VP	2CPX043351R9999
	600	3	500	3x30	●	●	275	1	MBC304VP	2CPX043376R9999	MC304VP	2CPX043374R9999
5	750	2	250	2x38	●	●	275	1	MBC205VP	2CPX043373R9999	MC205VP	2CPX043353R9999
	750	3	750	3x38	●	●	275	1	MBC305VP	2CPX043377R9999	MC305VP	2CPX043375R9999

Interior expansion system CombiLine N

Module combinations for busbars TwinLine row mountings

The busbar systems for cabinet row mounting of the TwinLine cabinet system can be interconnected for various installation positions, the possible CombiLine N modules. There are modules that are interconnected in front of or behind the mounting frame due to the location of the busbar bracket.

If, for example, an N/PE busbar module is needed in the **top** of the cabinet and a busbar module is needed at the **bottom**, the possibility of combining the different modules must be taken into account. The different adjustment possibilities of the installation positions (1/0/-1) can be taken from the opposite side.

Assembly rail
Top view

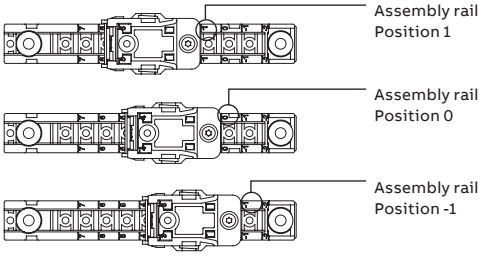

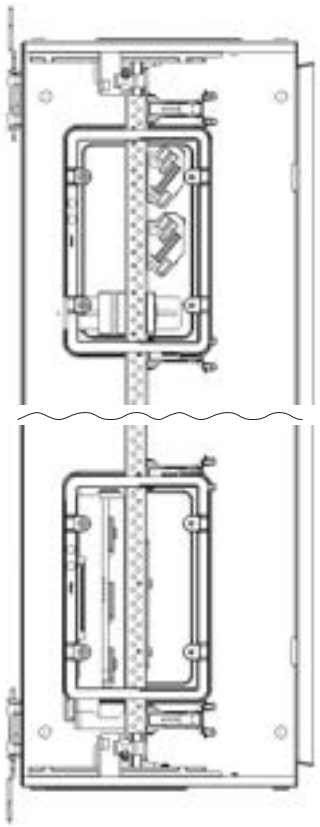

CombiLine N module
M(B)N...74 above

CombiLine N module
M(B)S...27 below

Example structure on EDF mounting frame
On mounting position 1 above and below
in the TwinLine-L cabinet, depth 275 mm

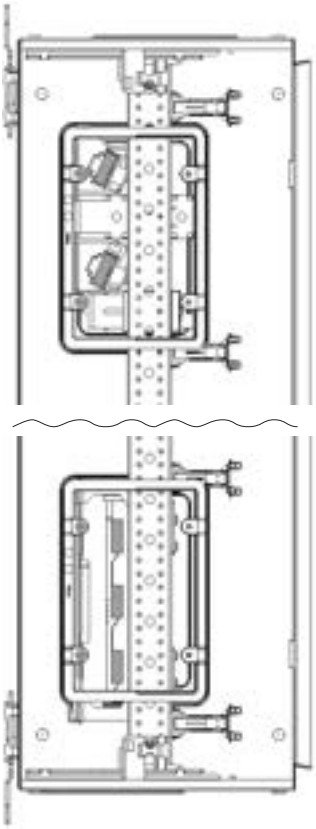

CombiLine N module
M(B)N...62 above

CombiLine N module
M(B)S...27 below

Example structure on WR mounting frame
On mounting position -1 above and below
in the TwinLine-L cabinet, depth 275 mm

Interior expansion system CombiLine N

Module combinations for busbars TwinLine row mountings

Possible combinations on EDF mounting frame

	Module type, above	M(B)S...24			M(B)S...27			M(B)N...74 M(B)N...75			M(B)N...62 M(B)N...63			M(B)R...02		
Module type, below	Suitable for TwinLine	G	L	W	G	L	W	G	L	W	G	L	W	G	L	W
M(B)S...24	G	1/0/-1			1/0/-1			1/0						1		
	L		1/0/-1			1/0/-1			1						1	
	W			1/0/-1			1/0/-1			1						1
M(B)S...27	G	1/0/-1			0 /-1			1/0						1		
	L		1/0/-1			1/0/-1			1 *						1	
	W			1/0/-1			1/0/-1			1						1
M(B)N...74 M(B)N...75	G	1/0			1/0			1/0						1		
	L		1			1			1						1	
	W			1			1			1						1
M(B)N...62 M(B)N...63	G															
	L															
	W															
M(B)R...02	G	1			1			1						1		
	L		1			1			1						1	
	W			1			1			1						1

> Cabinet depths TwinLine-G = 225 mm / TwinLine-L = 275 mm / TwinLine-W = 350 mm
* Mounting position of the example setup of the opposite side

Possible combinations on WR mounting frame

	Module type, above	M(B)S...24			M(B)S...27			M(B)N...74 M(B)N...75			M(B)N...62 M(B)N...63			M(B)R...02		
Module type, below	Suitable for TwinLine	G	L	W	G	L	W	G	L	W	G	L	W	G	L	W
M(B)S...24	G	-			-			-						-		
	L		-1			-1			-			-1			-	
	W			-1			-1			-			-1			-
M(B)S...27	G	-			-1			-						-		
	L		-1			-1			-			-1 *			-	
	W			-1			-1			-			-1			-
M(B)N...74 M(B)N...75	G	-			-			1/0						1		
	L		-			-			1			-			1	
	W			-			-			1			-			1
M(B)N...62 M(B)N...63	G															
	L		-1			-1			-			-1			-	
	W			-1			-1			-			-1			-
M(B)R...02	G	-			-			1						1		
	L		-			-			1			-			1	
	W			-			-			1			-			1

> Cabinet depths TwinLine-G = 225 mm / TwinLine-L = 275 mm / TwinLine-W = 350 mm

Legend for the tables
0 = Installation position 0 is possible
1 = Installation position 1 is possible
-1 = Installation position -1 is possible
1/0 = Installation positions 1 or 0 are possible
0/-1 = Installation positions 0 or -1 are possible
1/0/-1 = Installation positions1 and 0 and -1 are possible

TwinLine busbars

Row mounting for modules M(B)S…27

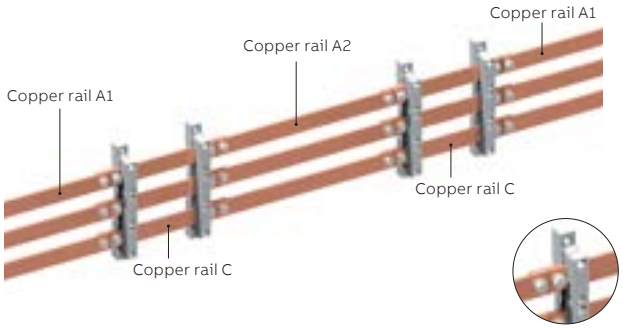

- It is possible to combine different module widths within the cabinet with continuous busbars
- Busbars for cabinet row mounting (copper rail A1/A2) are delivered on the connection side with copper transport pieces and attachment material
- A connector (copper rail C) is required for each busbar connection
- **Important**: note the possibility to combine modules with the TwinLine cabinet row mountings
- 3 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for TwinLine cabinet row mounting right or left								
30 x 5	440	1	138 + 43	1	ZX2236	2CPX042642R9999	ZXM2236	2CPX042684R9999
		2	388 + 43	1	ZX2237	2CPX042643R9999	ZXM2237	2CPX042685R9999
		3	638 + 43	1	ZX2238	2CPX042644R9999	ZXM2238	2CPX042686R9999
		4	888 + 43	1	ZX2239	2CPX042645R9999	ZXM2239	2CPX042687R9999
		5	1138 + 43	1	ZX2240	2CPX042646R9999	ZXM2240	2CPX042688R9999
		6	1388 + 43	1	ZX2241	2CPX042647R9999	ZXM2241	2CPX042689R9999
30 x 10	630	1	138 + 43	1	ZX2248	2CPX042654R9999	ZXM2248	2CPX042696R9999
		2	388 + 43	1	ZX2249	2CPX042655R9999	ZXM2249	2CPX042697R9999
		3	638 + 43	1	ZX2250	2CPX042656R9999	ZXM2250	2CPX042698R9999
		4	888 + 43	1	ZX2251	2CPX042657R9999	ZXM2251	2CPX042699R9999
		5	1138 + 43	1	ZX2252	2CPX042658R9999	ZXM2252	2CPX042700R9999
		6	1388 + 43	1	ZX2253	2CPX042659R9999	ZXM2253	2CPX042701R9999
Copper rail A2, busbars for TwinLine cabinet row mounting right and left								
30 x 5	440	1	43 + 95 + 43	1	ZX2336	2CPX042726R9999	ZXM2336	2CPX042762R9999
		2	43 + 345 + 43	1	ZX2337	2CPX042727R9999	ZXM2337	2CPX042763R9999
		3	43 + 595 + 43	1	ZX2338	2CPX042728R9999	ZXM2338	2CPX042764R9999
		4	43 + 845 + 43	1	ZX2339	2CPX042729R9999	ZXM2339	2CPX042765R9999
		5	43 + 1095 + 43	1	ZX2340	2CPX042730R9999	ZXM2340	2CPX042766R9999
		6	43 + 1345 + 43	1	ZX2341	2CPX042731R9999	ZXM2341	2CPX042767R9999
30 x 10	630	1	43 + 95 + 43	1	ZX2348	2CPX042738R9999	ZXM2348	2CPX042774R9999
		2	43 + 345 + 43	1	ZX2349	2CPX042739R9999	ZXM2349	2CPX042775R9999
		3	43 + 595 + 43	1	ZX2350	2CPX042740R9999	ZXM2350	2CPX042776R9999
		4	43 + 845 + 43	1	ZX2351	2CPX042741R9999	ZXM2351	2CPX042777R9999
		5	43 + 1095 + 43	1	ZX2352	2CPX042742R9999	ZXM2352	2CPX042778R9999
		6	43 + 1345 + 43	1	ZX2353	2CPX042743R9999	ZXM2353	2CPX042779R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
30 x 5	440		208	1	ZX2407	2CPX042789R9999	-	-
30 x 10	630		208	1	ZX2408	2CPX042790R9999	-	-

TwinLine busbars

Row mounting for modules M(B) N..74+75

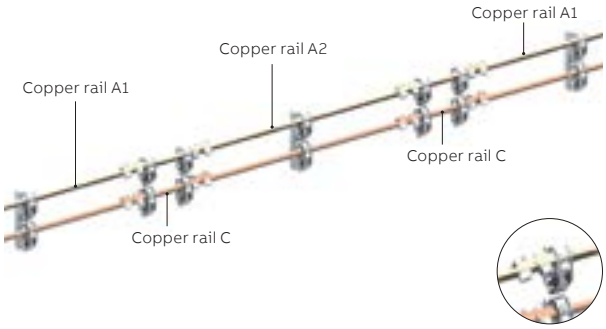

- It is possible to combine different module widths within the cabinet with continuous busbars
- Busbars for cabinet row mounting (copper rail A1/A2) are delivered on the connection side with copper transport pieces and attachment material
- A connector (copper rail C) is required for each busbar connection
- **Important**: note the possibility to combine modules with the TwinLine cabinet row mountings
- 2 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for TwinLine cabinet row mounting right or left								
20 x 5	320	1	200 + 43	1	ZX2230	2CPX042636R9999	ZXM2230	2CPX042678R9999
		2	450 + 43	1	ZX2231	2CPX042637R9999	ZXM2231	2CPX042679R9999
		3	700 + 43	1	ZX2232	2CPX042638R9999	ZXM2232	2CPX042680R9999
		4	950 + 43	1	ZX2233	2CPX042639R9999	ZXM2233	2CPX042681R9999
		5	1200 + 43	1	ZX2234	2CPX042640R9999	ZXM2234	2CPX042682R9999
		6	1450 + 43	1	ZX2235	2CPX042641R9999	ZXM2235	2CPX042683R9999
30 x 5	440	1	200 + 43	1	ZX2242	2CPX042648R9999	ZXM2242	2CPX042690R9999
		2	450 + 43	1	ZX2243	2CPX042649R9999	ZXM2243	2CPX042691R9999
		3	700 + 43	1	ZX2244	2CPX042650R9999	ZXM2244	2CPX042692R9999
		4	950 + 43	1	ZX2245	2CPX042651R9999	ZXM2245	2CPX042693R9999
		5	1200 + 43	1	ZX2246	2CPX042652R9999	ZXM2246	2CPX042694R9999
		6	1450 + 43	1	ZX2247	2CPX042653R9999	ZXM2247	2CPX042695R9999
Copper rail A2, busbars for TwinLine cabinet row mounting right and left								
20 x 5	320	1	43 + 154 + 43	1	ZX2330	2CPX042720R9999	ZXM2330	2CPX042756R9999
		2	43 + 404 + 43	1	ZX2331	2CPX042721R9999	ZXM2331	2CPX042757R9999
		3	43 + 654 + 43	1	ZX2332	2CPX042722R9999	ZXM2332	2CPX042758R9999
		4	43 + 904 + 43	1	ZX2333	2CPX042723R9999	ZXM2333	2CPX042759R9999
		5	43 + 1154 + 43	1	ZX2334	2CPX042724R9999	ZXM2334	2CPX042760R9999
		6	43 + 1404 + 43	1	ZX2335	2CPX042725R9999	ZXM2335	2CPX042761R9999
30 x 5	440	1	43 + 154 + 43	1	ZX2342	2CPX042732R9999	ZXM2342	2CPX042768R9999
		2	43 + 404 + 43	1	ZX2343	2CPX042733R9999	ZXM2343	2CPX042769R9999
		3	43 + 654 + 43	1	ZX2344	2CPX042734R9999	ZXM2344	2CPX042770R9999
		4	43 + 904 + 43	1	ZX2345	2CPX042735R9999	ZXM2345	2CPX042771R9999
		5	43 + 1154 + 43	1	ZX2346	2CPX042736R9999	ZXM2346	2CPX042772R9999
		6	43 + 1404 + 43	1	ZX2347	2CPX042737R9999	ZXM2347	2CPX042773R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
20 x 5	320	-	149	1	ZX2404	2CPX042786R9999	-	-
30 x 5	440	-	149	1	ZX2406	2CPX042788R9999	-	-

TwinLine busbars

Row mounting for modules M(B) N..62+63

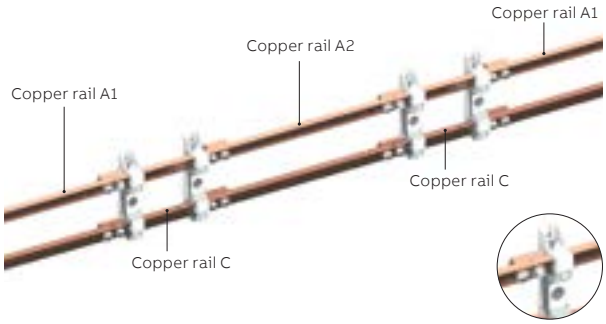

- It is possible to combine different module widths within the cabinet with continuous busbars
- Busbars for cabinet row mounting (copper rail A1/A2) are delivered on the connection side with copper transport pieces and attachment material
- A connector (copper rail C) is required for each busbar connection
- **Important**: note the possibility to combine modules with the TwinLine cabinet row mountings
- 2 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for TwinLine cabinet row mounting right or left								
30 x 10	630	1	149 + 43	1	ZX2254	2CPX042660R9999	ZXM2254	2CPX042702R9999
		2	399 + 43	1	ZX2255	2CPX042661R9999	ZXM2255	2CPX042703R9999
		3	649 + 43	1	ZX2256	2CPX042662R9999	ZXM2256	2CPX042704R9999
		4	899 + 43	1	ZX2257	2CPX042663R9999	ZXM2257	2CPX042705R9999
		5	1149 + 43	1	ZX2258	2CPX042664R9999	ZXM2258	2CPX042706R9999
		6	1399 + 43	1	ZX2259	2CPX042665R9999	ZXM2259	2CPX042707R9999
Copper rail A2, busbars for TwinLine cabinet row mounting right and left								
30 x 10	630	1	43 + 95 + 43	1	ZX2348	2CPX042738R9999	ZXM2348	2CPX042774R9999
		2	43 + 345 + 43	1	ZX2349	2CPX042739R9999	ZXM2349	2CPX042775R9999
		3	43 + 595 + 43	1	ZX2350	2CPX042740R9999	ZXM2350	2CPX042776R9999
		4	43 + 845 + 43	1	ZX2351	2CPX042741R9999	ZXM2351	2CPX042777R9999
		5	43 + 1095 + 43	1	ZX2352	2CPX042742R9999	ZXM2352	2CPX042778R9999
		6	43 + 1345 + 43	1	ZX2353	2CPX042743R9999	ZXM2353	2CPX042779R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
30 x 10	630		208	1	ZX2408	2CPX042790R9999	-	-

TwinLine busbars

Row mounting for modules M(B)R...02(B)

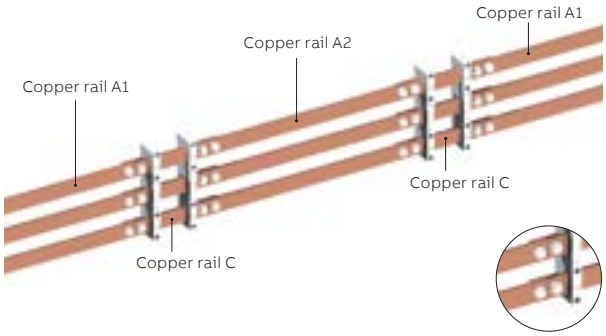

- It is possible to combine different module widths within the cabinet with continuous busbars
- Busbars for cabinet row mounting (copper rail A1/A2) are delivered on the connection side with copper transport pieces and attachment material
- A connector (copper rail C) is required for each busbar connection
- **Important:** For populated modules MR...02B, the external bus-mounting fuse socket may be omitted, for:
  MR102B for connection left, 1 unit,
  MR202B for connection left, 1 unit,
  MR302B for connection left or right, 2 units each;
  these must be replaced by empty space covers ZA4P10 in the cover
- **Important**: note the possibility to combine modules with the TwinLine cabinet row mountings
- 3 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for TwinLine cabinet row mounting right or left								
20 x 5	320	1	200 + 43	1	ZX2230	2CPX042636R9999	ZXM2230	2CPX042678R9999
		2	450 + 43	1	ZX2231	2CPX042637R9999	ZXM2231	2CPX042679R9999
		3	700 + 43	1	ZX2232	2CPX042638R9999	ZXM2232	2CPX042680R9999
		4	950 + 43	1	ZX2233	2CPX042639R9999	ZXM2233	2CPX042681R9999
		5	1200 + 43	1	ZX2234	2CPX042640R9999	ZXM2234	2CPX042682R9999
		6	1450 + 43	1	ZX2235	2CPX042641R9999	ZXM2235	2CPX042683R9999
30 x 5	440	1	200 + 43	1	ZX2242	2CPX042648R9999	ZXM2242	2CPX042690R9999
		2	450 + 43	1	ZX2243	2CPX042649R9999	ZXM2243	2CPX042691R9999
		3	700 + 43	1	ZX2244	2CPX042650R9999	ZXM2244	2CPX042692R9999
		4	950 + 43	1	ZX2245	2CPX042651R9999	ZXM2245	2CPX042693R9999
		5	1200 + 43	1	ZX2246	2CPX042652R9999	ZXM2246	2CPX042694R9999
		6	1450 + 43	1	ZX2247	2CPX042653R9999	ZXM2247	2CPX042695R9999
Copper rail A2, busbars for TwinLine cabinet row mounting right and left								
20 x 5	320	1	43 + 154 + 43	1	ZX2330	2CPX042720R9999	ZXM2330	2CPX042756R9999
		2	43 + 404 + 43	1	ZX2331	2CPX042721R9999	ZXM2331	2CPX042757R9999
		3	43 + 654 + 43	1	ZX2332	2CPX042722R9999	ZXM2332	2CPX042758R9999
		4	43 + 904 + 43	1	ZX2333	2CPX042723R9999	ZXM2333	2CPX042759R9999
		5	43 + 1154 + 43	1	ZX2334	2CPX042724R9999	ZXM2334	2CPX042760R9999
		6	43 + 1404 + 43	1	ZX2335	2CPX042725R9999	ZXM2335	2CPX042761R9999
30 x 5	440	1	43 + 154 + 43	1	ZX2342	2CPX042732R9999	ZXM2342	2CPX042768R9999
		2	43 + 404 + 43	1	ZX2343	2CPX042733R9999	ZXM2343	2CPX042769R9999
		3	43 + 654 + 43	1	ZX2344	2CPX042734R9999	ZXM2344	2CPX042770R9999
		4	43 + 904 + 43	1	ZX2345	2CPX042735R9999	ZXM2345	2CPX042771R9999
		5	43 + 1154 + 43	1	ZX2346	2CPX042736R9999	ZXM2346	2CPX042772R9999
		6	43 + 1404 + 43	1	ZX2347	2CPX042737R9999	ZXM2347	2CPX042773R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
20 x 5	320	-	149	1	ZX2404	2CPX042786R9999	-	-
30 x 5	440	-	149	1	ZX2406	2CPX042788R9999	-	-

Busbars TriLine system and pro *E* power system

Row mounting for modules M(B)S…24

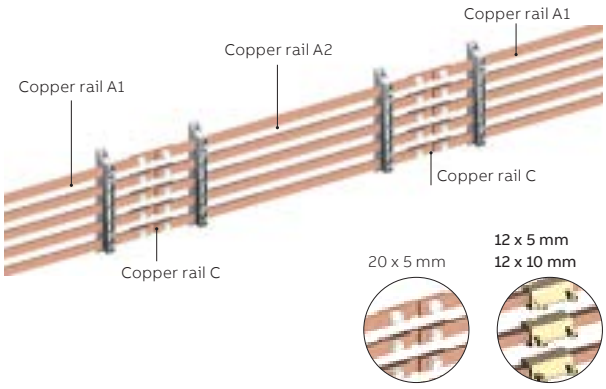

- It is possible to combine different module widths within the cabinet with continuous busbars
- A connector is required for cabinet row mounting for each busbar connection
- The busbar connection is realized outside the module
- Busbar connector for copper 12 x 5 mm and 12 x 10 mm, including connection terminals
- Busbar connector for copper 20 x 5 mm, including press-in nuts and fastening screws
- A max. of 5 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for cabinet row mounting right or left								
12 x 5	250	1	293	1	ZX1040	2CPX041906R9999	ZXM1040	2CPX041516R9999
		2	543	1	ZX1041	2CPX041907R9999	ZXM1041	2CPX041517R9999
		3	793	1	ZX1042	2CPX041908R9999	ZXM1042	2CPX041518R9999
		4	1043	1	ZX1043	2CPX041909R9999	ZXM1043	2CPX041519R9999
		5	1293	1	ZX1044	2CPX041910R9999	ZXM1044	2CPX041520R9999
12 x 10	360	1	293	1	ZX1046	2CPX041912R9999	ZXM1046	2CPX041522R9999
		2	543	1	ZX1047	2CPX041913R9999	ZXM1047	2CPX041523R9999
		3	793	1	ZX1048	2CPX041914R9999	ZXM1048	2CPX041524R9999
		4	1043	1	ZX1049	2CPX041915R9999	ZXM1049	2CPX041525R9999
		5	1293	1	ZX1050	2CPX041916R9999	ZXM1050	2CPX041526R9999
20 x 5	320	1	293	1	ZX1052	2CPX041918R9999	ZXM1052	2CPX041528R9999
		2	543	1	ZX1053	2CPX041919R9999	ZXM1053	2CPX041529R9999
		3	793	1	ZX1054	2CPX041920R9999	ZXM1054	2CPX041530R9999
		4	1043	1	ZX1055	2CPX041921R9999	ZXM1055	2CPX041531R9999
		5	1293	1	ZX1056	2CPX041922R9999	ZXM1056	2CPX041532R9999
Copper rail A2, busbars for cabinet row mounting right and left								
12 x 5	250	1	345	1	ZX1080	2CPX041942R9999	ZXM1080	2CPX041552R9999
		2	595	1	ZX1081	2CPX041943R9999	ZXM1081	2CPX041553R9999
		3	845	1	ZX1082	2CPX041944R9999	ZXM1082	2CPX041554R9999
		4	1095	1	ZX1083	2CPX041945R9999	ZXM1083	2CPX041555R9999
		5	1345	1	ZX1084	2CPX041946R9999	ZXM1084	2CPX041556R9999
12 x 10	360	1	340	1	ZX1086	2CPX041948R9999	ZXM1086	2CPX041558R9999
		2	590	1	ZX1087	2CPX041949R9999	ZXM1087	2CPX041559R9999
		3	840	1	ZX1088	2CPX041950R9999	ZXM1088	2CPX041560R9999
		4	1090	1	ZX1089	2CPX041951R9999	ZXM1089	2CPX041561R9999
		5	1340	1	ZX1090	2CPX041952R9999	ZXM1090	2CPX041562R9999
20 x 5	320	1	340	1	ZX1092	2CPX041954R9999	ZXM1092	2CPX041564R9999
		2	590	1	ZX1093	2CPX041955R9999	ZXM1093	2CPX041565R9999
		3	840	1	ZX1094	2CPX041956R9999	ZXM1094	2CPX041566R9999
		4	1090	1	ZX1095	2CPX041957R9999	ZXM1095	2CPX041567R9999
		5	1340	1	ZX1096	2CPX041958R9999	ZXM1096	2CPX041568R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
12 x 5	250		21	1	ZX1180	2CPX042020R9999	-	-
12 x 10	360		44	1	ZX1181	2CPX042021R9999	-	-
20 x 5	320		94	1	ZX1182	2CPX042022R9999	-	-
Copper rail C, connector for the pro E power system cabinet row mounting right or left								
12 x 5	250		21	1	ZX1180	2CPX042020R9999	-	-
12 x 10	360		44	1	ZX1181	2CPX042021R9999	-	-
20 x 5	320		74	1	ZX1192	2CPX042105R9999	-	-

Busbars TriLine system and pro *E* power system

Row mounting for modules M(B)S...27

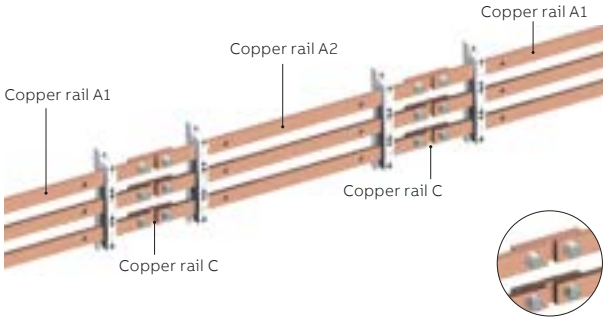

- It is possible to combine different module widths within the cabinet with continuous busbars
- A connector is required for cabinet row mounting for each busbar connection
- The busbar connection is realized outside the module
- Busbar connector, including press-in nuts and attachment material
- 3 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for cabinet row mounting right or left								
30 x 5	440	1	293	1	ZX1058	2CPX041924R9999	ZXM1058	2CPX041534R9999
		2	543	1	ZX1059	2CPX041925R9999	ZXM1059	2CPX041535R9999
		3	793	1	ZX1060	2CPX041926R9999	ZXM1060	2CPX041536R9999
		4	1043	1	ZX1061	2CPX041927R9999	ZXM1061	2CPX041537R9999
		5	1293	1	ZX1062	2CPX041928R9999	ZXM1062	2CPX041538R9999
30 x 10	630	1	293	1	ZX1064	2CPX041930R9999	ZXM1064	2CPX041540R9999
		2	543	1	ZX1065	2CPX041931R9999	ZXM1065	2CPX041541R9999
		3	793	1	ZX1066	2CPX041932R9999	ZXM1066	2CPX041542R9999
		4	1043	1	ZX1067	2CPX041933R9999	ZXM1067	2CPX041543R9999
		5	1293	1	ZX1068	2CPX041934R9999	ZXM1068	2CPX041544R9999
Copper rail A2, busbars for cabinet row mounting right and left								
30 x 5	440	1	340	1	ZX1098	2CPX041960R9999	ZXM1098	2CPX041570R9999
		2	590	1	ZX1099	2CPX041961R9999	ZXM1099	2CPX041571R9999
		3	840	1	ZX1100	2CPX041962R9999	ZXM1100	2CPX041572R9999
		4	1090	1	ZX1101	2CPX041963R9999	ZXM1101	2CPX041573R9999
		5	1340	1	ZX1102	2CPX041964R9999	ZXM1102	2CPX041574R9999
30 x 10	630	1	340	1	ZX1104	2CPX041966R9999	ZXM1104	2CPX041576R9999
		2	590	1	ZX1105	2CPX041967R9999	ZXM1105	2CPX041577R9999
		3	840	1	ZX1106	2CPX041968R9999	ZXM1106	2CPX041578R9999
		4	1090	1	ZX1107	2CPX041969R9999	ZXM1107	2CPX041579R9999
		5	1340	1	ZX1108	2CPX041970R9999	ZXM1108	2CPX041580R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
30 x 5	250		94	1	ZX1183	2CPX042023R9999	-	-
30 x 10	360		94	1	ZX1184	2CPX042024R9999	-	-
Copper rail C, connector for the pro E power system cabinet row mounting right or left								
30 x 5	250		74	1	ZX1193	2CPX042106R9999	-	-
30 x 10	360		74	1	ZX1194	2CPX042107R9999	-	-

Busbars TriLine system and pro *E* power system

Row mounting for modules M(B)S...31

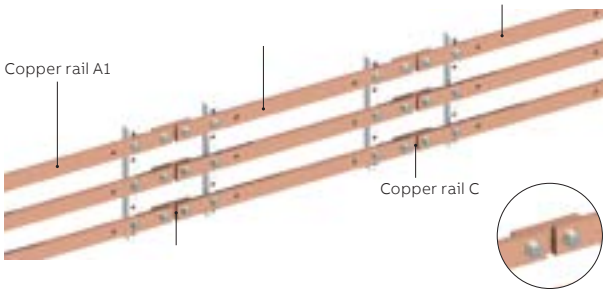

- It is possible to combine different module widths within the cabinet with continuous busbars
- A connector is required for cabinet row mounting for each busbar connection
- The busbar connection is realized outside the module
- Busbar connector, including press-in nuts and attachment material
- 3 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for cabinet row mounting right or left								
40 x 10	850	1	293	1	ZX1070	2CPX041936R9999	ZXM1070	2CPX041546R9999
		2	543	1	ZX1071	2CPX041937R9999	ZXM1071	2CPX041547R9999
		3	762	1	ZX1072	2CPX041938R9999	ZXM1072	2CPX041548R9999
		4 (2PW+2PW)	1043	1	ZX1073	2CPX041939R9999	ZXM1073	2CPX041549R9999
		5 (3PW+2PW)	1293	1	ZX1074	2CPX041940R9999	ZXM1074	2CPX041550R9999
Copper rail A2, busbars for cabinet row mounting right and left								
40 x 10	850	1	340	1	ZX1110	2CPX041972R9999	ZXM1110	2CPX041582R9999
		2	590	1	ZX1111	2CPX041973R9999	ZXM1111	2CPX041583R9999
		3	840	1	ZX1112	2CPX041974R9999	ZXM1112	2CPX041584R9999
		4 (2PW+2PW)	1090	1	ZX1113	2CPX041975R9999	ZXM1113	2CPX041585R9999
		5 (3PW+2PW)	1340	1	ZX1114	2CPX041976R9999	ZXM1114	2CPX041586R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
40 x 10	850		94	1	ZX1185	2CPX042025R9999	-	-
Copper rail C, connector for the pro *E* power system cabinet row mounting right or left								
40 x 10	850		74	1	ZX1195	2CPX042108R9999	-	-

Busbars TriLine system and pro *E* power system

Row mounting for modules M(B)N...69

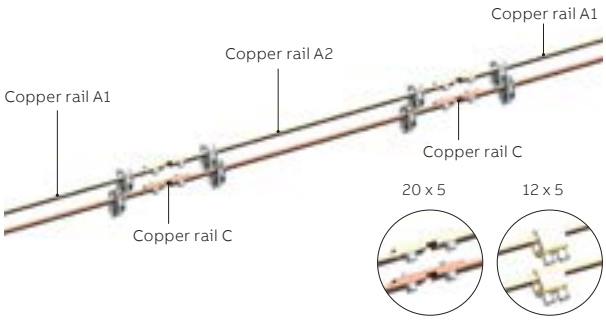

- It is possible to combine different module widths within the cabinet with continuous busbars
- A connector is required for cabinet row mounting for each busbar connection
- The busbar connection is realized outside the module
- Busbar connector, including press-in nuts and attachment material
- 2 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for cabinet row mounting right or left								
12 x 5	250	1	272	1	ZX2094	2CPX042578R9999	ZXM2094	2CPX042498R9999
		2	522	1	ZX2095	2CPX042579R9999	ZXM2095	2CPX042499R9999
		3	772	1	ZX2096	2CPX042580R9999	ZXM2096	2CPX042500R9999
		4	1022	1	ZX2097	2CPX042581R9999	ZXM2097	2CPX042501R9999
		5	1272	1	ZX2098	2CPX042582R9999	ZXM2098	2CPX042502R9999
20 x 5	320	1	272	1	ZX2112	2CPX042593R9999	ZXM2112	2CPX042513R9999
		2	522	1	ZX2113	2CPX042594R9999	ZXM2113	2CPX042514R9999
		3	772	1	ZX2114	2CPX042595R9999	ZXM2114	2CPX042515R9999
		4	1022	1	ZX2115	2CPX042596R9999	ZXM2115	2CPX042516R9999
		5	1272	1	ZX2116	2CPX042597R9999	ZXM2116	2CPX042517R9999
Copper rail A2, busbars for cabinet row mounting right and left								
12 x 5	250	1	345	1	ZX1080	2CPX041942R9999	ZXM1080	2CPX041552R9999
		2	595	1	ZX1081	2CPX041943R9999	ZXM1081	2CPX041553R9999
		3	845	1	ZX1082	2CPX041944R9999	ZXM1082	2CPX041554R9999
		4	1095	1	ZX1083	2CPX041945R9999	ZXM1083	2CPX041555R9999
		5	1345	1	ZX1084	2CPX041946R9999	ZXM1084	2CPX041556R9999
20 x 5	320	1	340	1	ZX1092	2CPX041954R9999	ZXM1092	2CPX041564R9999
		2	590	1	ZX1093	2CPX041955R9999	ZXM1093	2CPX041565R9999
		3	840	1	ZX1094	2CPX041956R9999	ZXM1094	2CPX041566R9999
		4	1090	1	ZX1095	2CPX041957R9999	ZXM1095	2CPX041567R9999
		5	1340	1	ZX1096	2CPX041958R9999	ZXM1096	2CPX041568R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
12 x 5	250		21	1	ZX1180	2CPX042020R9999	-	-
20 x 5	320		94	1	ZX1182	2CPX042022R9999	-	-
Copper rail C, connector for the pro *E* power system cabinet row mounting right or left								
12 x 5	250		21	1	ZX1180	2CPX042020R9999	-	-
20 x 5	320		74	1	ZX1192	2CPX042105R9999	-	-

Busbars TriLine system and pro *E* power system

Row mounting for modules M(B)N...74+75

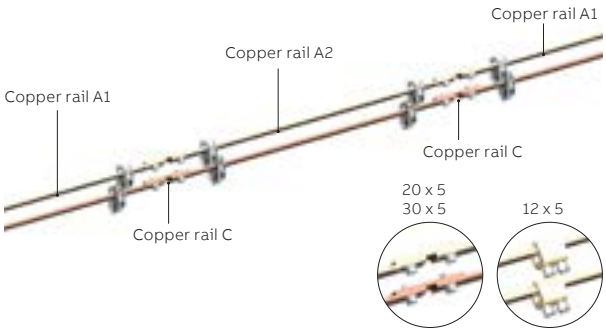

- It is possible to combine different module widths within the cabinet with continuous busbars
- A connector is required for cabinet row mounting for each busbar connection
- The busbar connection is realized outside the module
- Busbar connector, including press-in nuts and attachment material
- 2 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for cabinet row mounting right or left								
12 x 5	250	1	293	1	ZX1040	2CPX041906R9999	ZXM1040	2CPX041516R9999
		2	543	1	ZX1041	2CPX041907R9999	ZXM1041	2CPX041517R9999
		3	793	1	ZX1042	2CPX041908R9999	ZXM1042	2CPX041518R9999
		4	1043	1	ZX1043	2CPX041909R9999	ZXM1043	2CPX041519R9999
		5	1293	1	ZX1044	2CPX041910R9999	ZXM1044	2CPX041520R9999
20 x 5	320	1	293	1	ZX1052	2CPX041918R9999	ZXM1052	2CPX041528R9999
		2	543	1	ZX1053	2CPX041919R9999	ZXM1053	2CPX041529R9999
		3	793	1	ZX1054	2CPX041920R9999	ZXM1054	2CPX041530R9999
		4	1043	1	ZX1055	2CPX041921R9999	ZXM1055	2CPX041531R9999
		5	1293	1	ZX1056	2CPX041922R9999	ZXM1056	2CPX041532R9999
30 x 5	440	1	293	1	ZX1058	2CPX041924R9999	ZXM1058	2CPX041534R9999
		2	543	1	ZX1059	2CPX041925R9999	ZXM1059	2CPX041535R9999
		3	793	1	ZX1060	2CPX041926R9999	ZXM1060	2CPX041536R9999
		4	1043	1	ZX1061	2CPX041927R9999	ZXM1061	2CPX041537R9999
		5	1293	1	ZX1062	2CPX041928R9999	ZXM1062	2CPX041538R9999
Copper rail A2, busbars for cabinet row mounting right and left								
12 x 5	250	1	345	1	ZX1080	2CPX041942R9999	ZXM1080	2CPX041552R9999
		2	595	1	ZX1081	2CPX041943R9999	ZXM1081	2CPX041553R9999
		3	845	1	ZX1082	2CPX041944R9999	ZXM1082	2CPX041554R9999
		4	1090	1	ZX1083	2CPX041945R9999	ZXM1083	2CPX041555R9999
		5	1340	1	ZX1084	2CPX041946R9999	ZXM1084	2CPX041556R9999
20 x 5	320	1	340	1	ZX1092	2CPX041954R9999	ZXM1092	2CPX041564R9999
		2	590	1	ZX1093	2CPX041955R9999	ZXM1093	2CPX041565R9999
		3	840	1	ZX1094	2CPX041956R9999	ZXM1094	2CPX041566R9999
		4	1090	1	ZX1095	2CPX041957R9999	ZXM1095	2CPX041567R9999
		5	1340	1	ZX1096	2CPX041958R9999	ZXM1096	2CPX041568R9999
30 x 5	440	1	350	1	ZX1098	2CPX041960R9999	ZXM1098	2CPX041570R9999
		2	600	1	ZX1099	2CPX041961R9999	ZXM1099	2CPX041571R9999
		3	850	1	ZX1100	2CPX041962R9999	ZXM1100	2CPX041572R9999
		4	1100	1	ZX1101	2CPX041963R9999	ZXM1101	2CPX041573R9999
		5	1350	1	ZX1102	2CPX041964R9999	ZXM1102	2CPX041574R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
12 x 5	250		21	1	ZX1180	2CPX042020R9999	-	-
20 x 5	320		94	1	ZX1182	2CPX042022R9999	-	-
30 x 5	440		94	1	ZX1183	2CPX042023R9999	-	-
Copper rail C, connector for the pro E power system cabinet row mounting right or left								
12 x 5	250		21	1	ZX1180	2CPX042020R9999	-	-
20 x 5	320		74	1	ZX1192	2CPX042105R9999	-	-
30 x 5	440		74	1	ZX1193	2CPX042106R9999	-	-

Busbars TriLine system and pro *E* power system

Row mounting for modules M(B)N...62+63

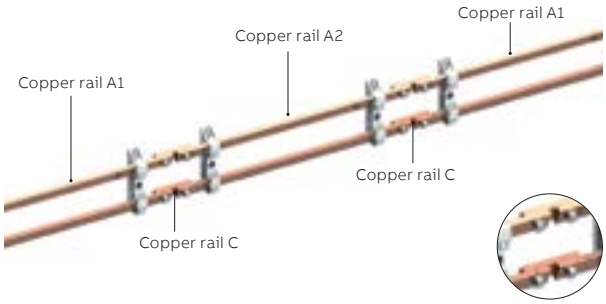

- It is possible to combine different module widths within the cabinet with continuous busbars
- A connector is required for cabinet row mounting for each busbar connection
- The busbar connection is realized outside the module
- Busbar connector, including press-in nuts and attachment material
- 2 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for cabinet row mounting right or left								
30 x 10	630	1	270	1	ZX2130	2CPX042608R9999	ZXM2130	2CPX042528R9999
		2	520	1	ZX2131	2CPX042609R9999	ZXM2131	2CPX042529R9999
		3	770	1	ZX2132	2CPX042610R9999	ZXM2132	2CPX042530R9999
		4	1020	1	ZX2133	2CPX042611R9999	ZXM2133	2CPX042531R9999
		5	1270	1	ZX2134	2CPX042612R9999	ZXM2134	2CPX042532R9999
Copper rail A2, busbars for cabinet row mounting right and left								
30 x 10	630	1	340	1	ZX1104	2CPX041966R9999	ZXM1104	2CPX041576R9999
		2	590	1	ZX1105	2CPX041967R9999	ZXM1105	2CPX041577R9999
		3	840	1	ZX1106	2CPX041968R9999	ZXM1106	2CPX041578R9999
		4	1090	1	ZX1107	2CPX041969R9999	ZXM1107	2CPX041579R9999
		5	1340	1	ZX1108	2CPX041970R9999	ZXM1108	2CPX041580R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
30 x 10	360		94	1	ZX1184	2CPX042024R9999	-	-
Copper rail C, connector for the pro E power system cabinet row mounting right or left								
30 x 10	360		74	1	ZX1194	2CPX042107R9999	-	-

Busbars TriLine system and pro *E* power system

Row mounting for modules M(B)R...03

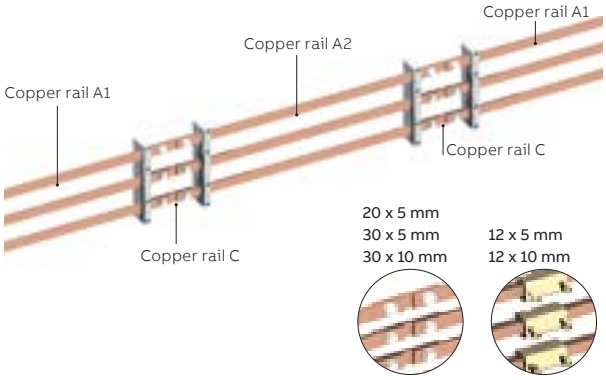

- It is possible to combine different module widths within the cabinet with continuous busbars
- A connector is required for cabinet row mounting for each busbar connection
- The busbar connection is realized outside the module
- Busbar connector for copper 12 x 5 mm and 12 x 10 mm, including connection terminals
- Busbar connector for copper 20 x 5 mm, including press-in nuts and fastening screws
- 3 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for TriLine cabinet row mounting right or left								
12 x 5	250	1	267	1	ZX2088	2CPX042573R9999	ZXM2088	2CPX042493R9999
		2	517	1	ZX2089	2CPX042574R9999	ZXM2089	2CPX042494R9999
		3	767	1	ZX2090	2CPX042575R9999	ZXM2090	2CPX042495R9999
		4	1017	1	ZX2091	2CPX042576R9999	ZXM2091	2CPX042496R9999
		5	1267	1	ZX2092	2CPX042577R9999	ZXM2092	2CPX042497R9999
12 x 10	360	1	267	1	ZX2100	2CPX042583R9999	ZXM2100	2CPX042503R9999
		2	517	1	ZX2101	2CPX042584R9999	ZXM2101	2CPX042504R9999
		3	767	1	ZX2102	2CPX042585R9999	ZXM2102	2CPX042505R9999
		4	1017	1	ZX2103	2CPX042586R9999	ZXM2103	2CPX042506R9999
		5	1267	1	ZX2104	2CPX042587R9999	ZXM2104	2CPX042507R9999
20 x 5	320	1	267	1	ZX2106	2CPX042588R9999	ZXM2106	2CPX042508R9999
		2	517	1	ZX2107	2CPX042589R9999	ZXM2107	2CPX042509R9999
		3	767	1	ZX2108	2CPX042590R9999	ZXM2108	2CPX042510R9999
		4	1017	1	ZX2109	2CPX042591R9999	ZXM2109	2CPX042511R9999
		5	1267	1	ZX2110	2CPX042592R9999	ZXM2110	2CPX042512R9999
30 x 5	440	1	267	1	ZX2118	2CPX042598R9999	ZXM2118	2CPX042518R9999
		2	517	1	ZX2119	2CPX042599R9999	ZXM2119	2CPX042519R9999
		3	767	1	ZX2120	2CPX042600R9999	ZXM2120	2CPX042520R9999
		4	1017	1	ZX2121	2CPX042601R9999	ZXM2121	2CPX042521R9999
		5	1267	1	ZX2122	2CPX042602R9999	ZXM2122	2CPX042522R9999
30 x 10	630	1	267	1	ZX2124	2CPX042603R9999	ZXM2124	2CPX042523R9999
		2	517	1	ZX2125	2CPX042604R9999	ZXM2125	2CPX042524R9999
		3	767	1	ZX2126	2CPX042605R9999	ZXM2126	2CPX042525R9999
		4	1017	1	ZX2127	2CPX042606R9999	ZXM2127	2CPX042526R9999
		5	1267	1	ZX2128	2CPX042607R9999	ZXM2128	2CPX042527R9999

Busbars TriLine system and pro *E* power system

Row mounting for modules M(B)R...03

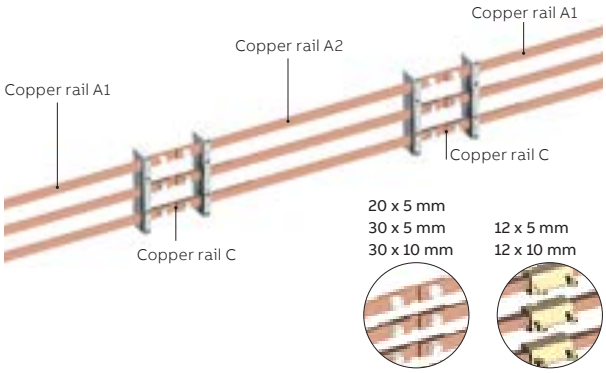

- It is possible to combine different module widths within the cabinet with continuous busbars
- A connector is required for cabinet row mounting for each busbar connection
- The busbar connection is realized outside the module
- Busbar connector for copper 12 x 5 mm and 12 x 10 mm, including connection terminals
- Busbar connector for copper 20 x 5 mm, including press-in nuts and fastening screws
- 3 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A2, busbars for cabinet row mounting right and left								
12 x 5	250	1	345	1	ZX1080	2CPX041942R9999	ZXM1080	2CPX041552R9999
		2	595	1	ZX1081	2CPX041943R9999	ZXM1081	2CPX041553R9999
		3	845	1	ZX1082	2CPX041944R9999	ZXM1082	2CPX041554R9999
		4	1095	1	ZX1083	2CPX041945R9999	ZXM1083	2CPX041555R9999
		5	1345	1	ZX1084	2CPX041946R9999	ZXM1084	2CPX041556R9999
12 x 10	360	1	340	1	ZX1086	2CPX041948R9999	ZXM1086	2CPX041558R9999
		2	590	1	ZX1087	2CPX041949R9999	ZXM1087	2CPX041559R9999
		3	840	1	ZX1088	2CPX041950R9999	ZXM1088	2CPX041560R9999
		4	1090	1	ZX1089	2CPX041951R9999	ZXM1089	2CPX041561R9999
		5	1340	1	ZX1090	2CPX041952R9999	ZXM1090	2CPX041562R9999
20 x 5	320	1	340	1	ZX1092	2CPX041954R9999	ZXM1092	2CPX041564R9999
		2	590	1	ZX1093	2CPX041955R9999	ZXM1093	2CPX041565R9999
		3	840	1	ZX1094	2CPX041956R9999	ZXM1094	2CPX041566R9999
		4	1090	1	ZX1095	2CPX041957R9999	ZXM1095	2CPX041567R9999
		5	1340	1	ZX1096	2CPX041958R9999	ZXM1096	2CPX041568R9999
30 x 5	440	1	340	1	ZX1098	2CPX041960R9999	ZXM1098	2CPX041570R9999
		2	590	1	ZX1099	2CPX041961R9999	ZXM1099	2CPX041571R9999
		3	840	1	ZX1100	2CPX041962R9999	ZXM1100	2CPX041572R9999
		4	1090	1	ZX1101	2CPX041963R9999	ZXM1101	2CPX041573R9999
		5	1340	1	ZX1102	2CPX041964R9999	ZXM1102	2CPX041574R9999
30 x 10	630	1	340	1	ZX1104	2CPX041966R9999	ZXM1104	2CPX041576R9999
		2	590	1	ZX1105	2CPX041967R9999	ZXM1105	2CPX041577R9999
		3	840	1	ZX1106	2CPX041968R9999	ZXM1106	2CPX041578R9999
		4	1090	1	ZX1107	2CPX041969R9999	ZXM1107	2CPX041579R9999
		5	1340	1	ZX1108	2CPX041970R9999	ZXM1108	2CPX041580R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
12 x 5	250		44	1	ZX1180	2CPX042020R9999	-	-
12 x 10	360		44	1	ZX1181	2CPX042021R9999	-	-
20 x 5	320		94	1	ZX1182	2CPX042022R9999	-	-
30 x 5	440		94	1	ZX1183	2CPX042023R9999	-	-
30 x 10	630		94	1	ZX1184	2CPX042024R9999	-	-
Copper rail C, connector for the pro *E* power system cabinet row mounting right or left								
12 x 5	250		44	1	ZX1180	2CPX042020R9999	-	-
12 x 10	360		44	1	ZX1181	2CPX042021R9999	-	-
20 x 5	320		74	1	ZX1192	2CPX042105R9999	-	-
30 x 5	440		74	1	ZX1193	2CPX042106R9999	-	-
30 x 10	630		74	1	ZX1194	2CPX042107R9999	-	-

Busbars TriLine system and pro *E* power system

Row mounting of modules 100 mm, NH00 switch disconnectors, M(B)D...52(B)

ZXM1215

- Busbars for individual cabinet installation
- With the EDF and WR mounting frame, defined combinations (see info PW width) are possible within the cabinet. The different busbars can be connected via a connection set
- The NH00 fuse switch disconnection rails are mounted directly on the copper rails prepared with press-in nuts
- Set positions are specified for feeding in on copper rails
- 3 copper rails are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
30 x 10	630	1	184	1	ZX1210	2CPX042121R9999	ZXM1210	2CPX042230R9999
		2	434	1	ZX1211	2CPX042122R9999	ZXM1211	2CPX042231R9999
		3	684	1	ZX1212	2CPX042123R9999	ZXM1212	2CPX042232R9999
40 x 10	850	1	184	1	ZX1213	2CPX042124R9999	ZXM1213	2CPX042233R9999
		2	434	1	ZX1214	2CPX042125R9999	ZXM1214	2CPX042234R9999
		3	684	1	ZX1215	2CPX042126R9999	ZXM1215	2CPX042235R9999

ZX1217

- Busbars connection set (cabinet-cabinet)
- **Important:** Note the cabinet depth when using a connection set
- A ZX22... P3 set with 3 connectors is required per connection

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail C, connector for the cabinet row mounting right or left for the TriLine system								
30 x 10	630		230	3	ZX2216P3	on request	-	-
40 x 10	850		230	3	ZX2217P3	on request	-	-
Copper rail C, connector for the cabinet row mounting right or left for the pro *E* power system								
30 x 10	630		230	3	ZX2218P3	on request	-	-
40 x 10	850		230	3	ZX2219P3	on request	-	-

Busbars TriLine system and pro *E* power system

Row mounting of modules 185 mm, switch disconnectors, M(B)D..21-300(B)

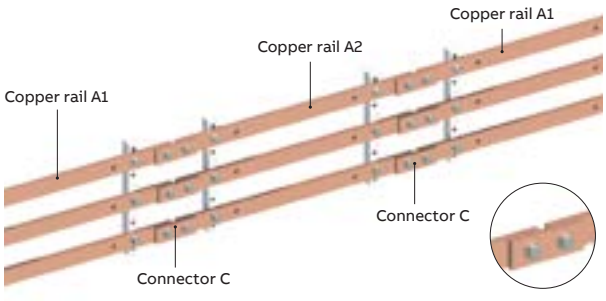

- Combinations of different module widths are possible within a cabinet with continuous busbars.
- The busbars A1 and A2 are provided with press-in nuts to assemble the NH-in-line fused load break switches.
- The busbar connection is realized outside the module
- 3 copper rails A1 or A2 and 3 or 6 copper connectors C are required per module
- The busbars A1 are required for cabinet row mounting right or left (right extension)
- The busbars A2 are required for cabinet row mounting right and left (both sides extension)
- A busbar connector C is required for each busbar connection
- The busbar connector is delivered with the press-in nuts and attachment material

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for the cabinet row mounting right or left (right extension) for the TriLine and pro *E* power systems								
30 x 10	630	1	274	1	ZX2520	2CPX042968R9999	ZXM2520	2CPX043316R9999
		2	524	1	ZX2521	2CPX042969R9999	ZXM2521	2CPX043317R9999
		3	774	1	ZX2522	2CPX042970R9999	ZXM2522	2CPX043318R9999
		4 (2PW+2PW)	1024	1	ZX2523	2CPX042971R9999	ZXM2523	2CPX043319R9999
		5 (3PW+2PW)	1274	1	ZX2524	2CPX042972R9999	ZXM2524	2CPX043320R9999
4 x 10	850	1	274	1	ZX2525	2CPX042973R9999	ZXM2525	2CPX043321R9999
		2	524	1	ZX2526	2CPX042974R9999	ZXM2526	2CPX043322R9999
		3	774	1	ZX2527	2CPX042975R9999	ZXM2527	2CPX043323R9999
		4 (2PW+2PW)	1024	1	ZX2528	2CPX042976R9999	ZXM2528	2CPX043324R9999
		5 (3PW+2PW)	1274	1	ZX2529	2CPX042977R9999	ZXM2529	2CPX043325R9999
Copper rail A2, busbars for the cabinet row mounting right and left (both sides extension) for the TriLine and pro *E* power systems								
30 x 10	630	1	333	1	ZX2530	2CPX042978R9999	ZXM2530	2CPX043326R9999
		2	583	1	ZX2531	2CPX042979R9999	ZXM2531	2CPX043327R9999
		3	833	1	ZX2532	2CPX042980R9999	ZXM2532	2CPX043328R9999
		4 (2PW+2PW)	1083	1	ZX2533	2CPX042981R9999	ZXM2533	2CPX043329R9999
		5 (3PW+2PW)	1333	1	ZX2534	2CPX042982R9999	ZXM2534	2CPX043330R9999
40 x 10	850	1	333	1	ZX2535	2CPX042983R9999	ZXM2535	2CPX043331R9999
		2	583	1	ZX2536	2CPX042984R9999	ZXM2536	2CPX043332R9999
		3	833	1	ZX2537	2CPX042985R9999	ZXM2537	2CPX043333R9999
		4 (2PW+2PW)	1083	1	ZX2538	2CPX042986R9999	ZXM2538	2CPX043334R9999
		5 (3PW+2PW)	1333	1	ZX2539	2CPX042987R9999	ZXM2539	2CPX043335R9999
Copper rail C, connector for the cabinet row mounting right and/or left for the TriLine pro *E* power systems								
30 x 10	630		100	1	ZX2540	2CPX042988R9999	ZXM2540	2CPX043336R9999
40 x 10	850		100	1	ZX2541	2CPX042989R9999	ZXM2541	2CPX043337R9999

Busbars TriLine system and pro *E* power system

Row mounting for modules M(B)R...02(B)

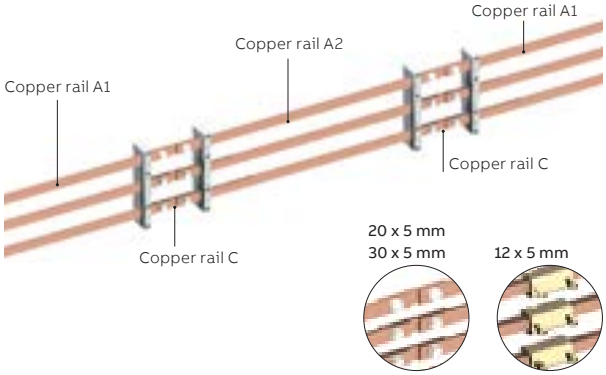

- It is possible to combine different module widths within the cabinet with continuous busbars
- A connector is required for cabinet row mounting for each busbar connection
- The busbar connection is realized outside the module
- Busbar connector for copper 12 x 5 mm and 12 x 10 mm, including connection terminals
- Busbar connector for copper 20 x 5 mm, including press-in nuts and fastening screws
- 3 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for cabinet row mounting right or left								
12 x 5	250	1	293	1	ZX1040	2CPX041906R9999	ZXM1040	2CPX041516R9999
		2	543	1	ZX1041	2CPX041907R9999	ZXM1041	2CPX041517R9999
		3	793	1	ZX1042	2CPX041908R9999	ZXM1042	2CPX041518R9999
		4	1043	1	ZX1043	2CPX041909R9999	ZXM1043	2CPX041519R9999
		5	1293	1	ZX1044	2CPX041910R9999	ZXM1044	2CPX041520R9999
20 x 5	320	1	293	1	ZX1052	2CPX041918R9999	ZXM1052	2CPX041528R9999
		2	543	1	ZX1053	2CPX041919R9999	ZXM1053	2CPX041529R9999
		3	793	1	ZX1054	2CPX041920R9999	ZXM1054	2CPX041530R9999
		4	1043	1	ZX1055	2CPX041921R9999	ZXM1055	2CPX041531R9999
		5	1293	1	ZX1056	2CPX041922R9999	ZXM1056	2CPX041532R9999
30 x 5	440	1	293	1	ZX1058	2CPX041924R9999	ZXM1058	2CPX041534R9999
		2	543	1	ZX1059	2CPX041925R9999	ZXM1059	2CPX041535R9999
		3	793	1	ZX1060	2CPX041926R9999	ZXM1060	2CPX041536R9999
		4	1043	1	ZX1061	2CPX041927R9999	ZXM1061	2CPX041537R9999
		5	1293	1	ZX1062	2CPX041928R9999	ZXM1062	2CPX041538R9999
Copper rail A2, busbars for cabinet row mounting right and left								
12 x 5	250	1	345	1	ZX1080	2CPX041942R9999	ZXM1080	2CPX041552R9999
		2	595	1	ZX1081	2CPX041943R9999	ZXM1081	2CPX041553R9999
		3	845	1	ZX1082	2CPX041944R9999	ZXM1082	2CPX041554R9999
		4	1095	1	ZX1083	2CPX041945R9999	ZXM1083	2CPX041555R9999
		5	1345	1	ZX1084	2CPX041946R9999	ZXM1084	2CPX041556R9999
20 x 5	320	1	340	1	ZX1092	2CPX041954R9999	ZXM1092	2CPX041564R9999
		2	590	1	ZX1093	2CPX041955R9999	ZXM1093	2CPX041565R9999
		3	840	1	ZX1094	2CPX041956R9999	ZXM1094	2CPX041566R9999
		4	1090	1	ZX1095	2CPX041957R9999	ZXM1095	2CPX041567R9999
		5	1340	1	ZX1096	2CPX041958R9999	ZXM1096	2CPX041568R9999
30 x 5	440	1	340	1	ZX1098	2CPX041960R9999	ZXM1098	2CPX041570R9999
		2	590	1	ZX1099	2CPX041961R9999	ZXM1099	2CPX041571R9999
		3	840	1	ZX1100	2CPX041962R9999	ZXM1100	2CPX041572R9999
		4	1090	1	ZX1101	2CPX041963R9999	ZXM1101	2CPX041573R9999
		5	1340	1	ZX1102	2CPX041964R9999	ZXM1102	2CPX041574R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
12 x 5	250		21	1	ZX1180	2CPX042020R9999	-	-
20 x 5	320		94	1	ZX1182	2CPX042022R9999	-	-
30 x 5	440		94	1	ZX1183	2CPX042023R9999	-	-
Copper rail C, connector for the pro *E* power system cabinet row mounting right or left								
12 x 5	250		21	1	ZX1180	2CPX042020R9999	-	-
20 x 5	320		74	1	ZX1192	2CPX042105R9999	-	-
30 x 5	440		74	1	ZX1193	2CPX042106R9999	-	-

Busbars TriLine system and pro *E* power system

Row mounting for modules M(B)T...50+51(B)

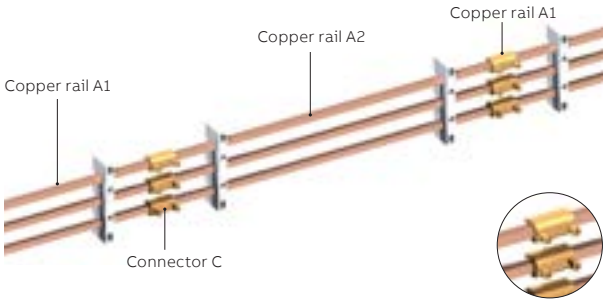

- It is possible to combine different module widths within the cabinet with continuous busbars
- A connector is required for cabinet row mounting for each busbar connection
- The busbar connection is realized outside the module
- Busbar connector, including connection terminals
- 3 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for cabinet row mounting right or left								
12 x 5	250	2	543	1	ZX1041	2CPX041907R9999	ZXM1041	2CPX041517R9999
		3	793	1	ZX1042	2CPX041908R9999	ZXM1042	2CPX041518R9999
		4	1043	1	ZX1043	2CPX041909R9999	ZXM1043	2CPX041519R9999
		5	1293	1	ZX1044	2CPX041910R9999	ZXM1044	2CPX041520R9999
12 x 10	360	2	543	1	ZX1047	2CPX041913R9999	ZXM1047	2CPX041523R9999
		3	793	1	ZX1048	2CPX041914R9999	ZXM1048	2CPX041524R9999
		4	1043	1	ZX1049	2CPX041915R9999	ZXM1049	2CPX041525R9999
		5	1293	1	ZX1050	2CPX041916R9999	ZXM1050	2CPX041526R9999
Copper rail A2, busbars for cabinet row mounting right and left								
12 x 5	250	2	595	1	ZX1081	2CPX041943R9999	ZXM1081	2CPX041553R9999
		3	845	1	ZX1082	2CPX041944R9999	ZXM1082	2CPX041554R9999
		4	1095	1	ZX1083	2CPX041945R9999	ZXM1083	2CPX041555R9999
		5	1345	1	ZX1084	2CPX041946R9999	ZXM1084	2CPX041556R9999
12 x 10	360	2	590	1	ZX1087	2CPX041949R9999	ZXM1087	2CPX041559R9999
		3	840	1	ZX1088	2CPX041950R9999	ZXM1088	2CPX041560R9999
		4	1090	1	ZX1089	2CPX041951R9999	ZXM1089	2CPX041561R9999
		5	1340	1	ZX1090	2CPX041952R9999	ZXM1090	2CPX041562R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
12 x 5	250		21	1	ZX1180	2CPX042020R9999	-	-
12 x 10	360		44	1	ZX1181	2CPX042021R9999	-	-
Copper rail C, connector for the pro *E* power system cabinet row mounting right or left								
12 x 5	250		21	1	ZX1180	2CPX042020R9999	-	-
12 x 10	360		44	1	ZX1181	2CPX042021R9999	-	-

Busbars TriLine system and pro *E* power system

Row mounting for modules M(B)L...5

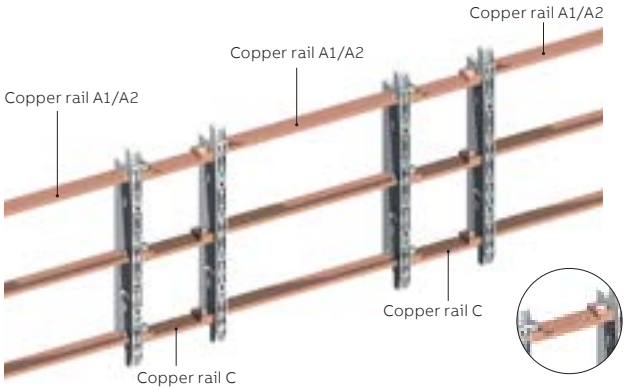

- It is possible to combine different module widths within the cabinet with continuous busbars
- A connector is required for cabinet row mounting for each busbar connection
- The busbar connection is realized outside the module
- Busbar connector, including press-in nuts and attachment material
- 3 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1/A2, busbars for TriLine cabinet row mounting right or left								
40 x 10	850	2	496	1	ZX1032	2CPX041901R9999	ZXM1032	2CPX041511R9999
		3	746	1	ZX1033	2CPX041902R9999	ZXM1033	2CPX041512R9999
		4	996	1	ZX1034	2CPX041903R9999	ZXM1034	2CPX041513R9999
		5	1246	1	ZX1035	2CPX041904R9999	ZXM1035	2CPX041514R9999
Copper rail A1/A2, busbars for cabinet row mounting right and left								
40 x 10	850	2	496	1	ZX1032	2CPX041901R9999	ZXM1032	2CPX041511R9999
		3	746	1	ZX1033	2CPX041902R9999	ZXM1033	2CPX041512R9999
		4	996	1	ZX1034	2CPX041903R9999	ZXM1034	2CPX041513R9999
		5	1246	1	ZX1035	2CPX041904R9999	ZXM1035	2CPX041514R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
40 x 10	850		165	1	ZX1186	2CPX042887R9999	-	-
Copper rail C, connector for the pro *E* power system cabinet row mounting right or left								
40 x 10	850		165	1	ZX1196	2CPX042109R9999	-	-

Notes

Distribution panel system CombiLine-X

The suitable extension up to 1.000 A

The extension of the CombiLine N modules up to 1000 A in combination with the TwinLine-X floor-standing or TriLine C enclosures offers new possibilities, especially for panel builders. The new solution optimally meets the practical requirements for a flexible internal configuration with a high degree of protection, quick in assembly, and an ease of installation. The CombiLine-X system is tested according to DIN EN 61439-1/2 and offers a high safety standard.

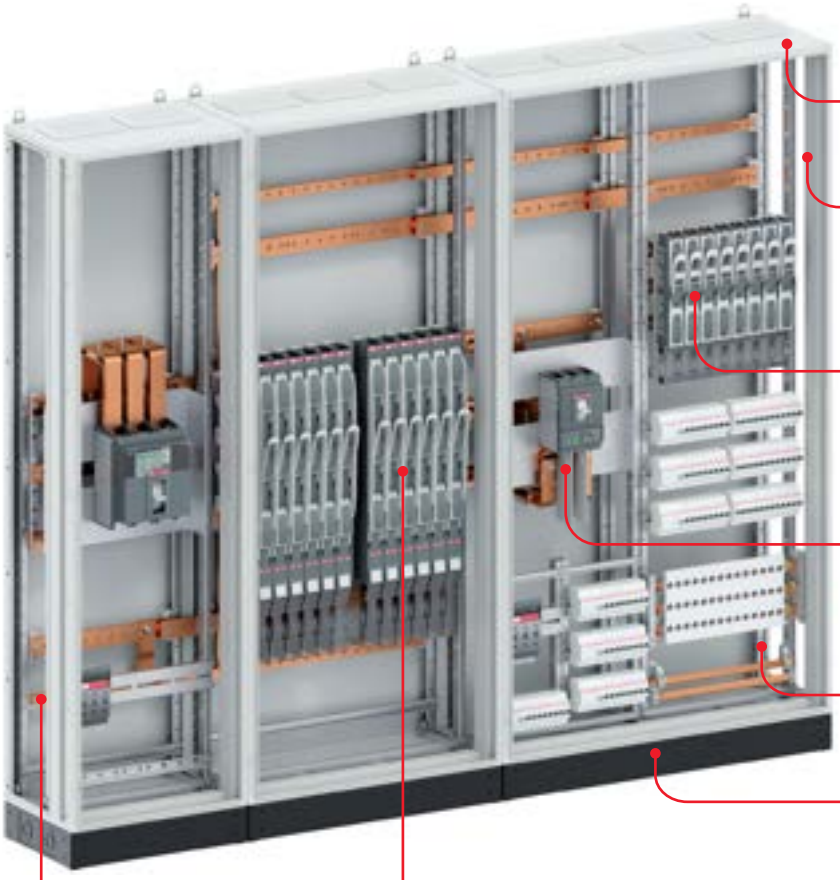

- Degree of protection: IPXXC
- Busbars: 3-pole + N + PE
- Main incomer: XT5/XT6/XT7 up to 1250 A; 3/4 pole
- Switch disconnector: OT up to 1.000 A, TruOne up to 800 A
- Rated current (I_{nA}): up to 1.000 A
- Single WR-frame / double WR-Frame for MBB
- Connection between breaker/switches and MBB: 800 A + 1.000A 3P, 3+N
- DIN EN 61439-1/-2

Distribution panel system CombiLine-X

The suitable extension up to 1.000 A

Circuit breaker XT5/XT6/XT7

Switch disconnector OT

Automatic transfer switch TruOne

Connection busbar coopper

Main busbar system

N/PE busbar

Copper connection in / between cabinets

Distribution panel system CombiLine-X

Extension with WR mounting frame

TwinLine-X floor-standing cabinets
(earthed/double insulated)

Extension with CombiLine-X modules
on double WR mounting frame

Extension with standard CombiLine N
modules on WR mounting frame

Distribution panel system CombiLine-X

Technical specifications

Complete delivery
The module system panel is completely assembled on the mounting frame with all modules and is delivered installed in the distributor cabinet. The mounting frame must be ordered separately.

Advantage: From the list of CombiLine N modules, you chose the modules that are tailored to your object, thereby getting the correct low-voltage distribution in the easiest way.
The module control panel you have thus planned is delivered installed in the cabinet ex works. This way you do not have to spend time looking for system accessories, such as angle brackets, screws or retaining elements. All you need to do is choose the appropriate mounting frame. Our selection StriePlan can take care of this if desired.

Delivery as a kit
All of the individual parts required to assemble a module are delivered individually packaged as a kit with instructions for assembly. All you need to do is choose the appropriate mounting frame. The mounting frame must be ordered separately. Our software StriePlan will take care of choosing the mounting frame if desired.

Advantage: The kits allow you to be flexible when it comes to warehousing. You do not have to spend time looking for system accessories, such as angle brackets, screws or retaining elements. The enclosed instructions make assembly a breeze. Software support from StriePlan makes planning and calculation perfectly quick and clear.

Delivery in individual parts
The desired expansion parts are purchased individually in order to set up, expand or convert a module on your own.

Advantage: With a manageable number of individual parts, if necessary you can remain quick and flexible when it comes to setting up, expanding or converting distribution.

Distribution panel system CombiLine N CX, IP2XC			
DIN EN 61439-1/-2/-3 (VDE 0660-600-1/-2/-3)*	X		
DIN 43880 (rail mounting devices)	X		
Rated impulse withstand voltage (U_{imp})	6 kV		
Overvoltage category	III		
Degree of pollution	3		
Protection class	I/II		
Internal form of separation	Form 1		
Rated current of the switchgear assembly (I_{nA})	up to 1000 A		
	Rail mounting devices acc. to DIN 43880	NH fuses- Switch disconnectors	Busbars systems
Rated peak withstand current (I_{pk})	25 kA	up to 52 kA	up to 74 kA
Rated short-time withstand current (I_{cw})	12.5 kA	up to 25 kA	up to 35 kA
Rated frequency (f)	50 Hz		
Rated insulation voltage (U_i)	690 V AC		
Rated operational voltage (U_e)	400 V AC		

* The permissible heating for switchgear assemblies up to a rated current of 630 A can be verified with the procedure according to section 10.10.4.2; for the required power loss capacities, please refer to the tables of the respective cabinet series; above a rated current of 630 A, the procedure according to 10.10.4.3 (DIN EN 61439-1 Supplement 2, DIN VDE 0660-600-1 Supplement 2) shall be applied.

Distribution panel system CombiLine-X

Tmax circuit breaker unequipped (MX…LX)

MX212LX

- Incoming / outgoing module
- Unequipped for ABB circuit breaker, fixed assembly with connections on front side **Tmax (XT5, XT6, XT7) 3-/4-poles**
- With all cross profiles required and busbar holder ZX522
- The mounting frames must be ordered separately.

Important:

- To be ordered seperately: For XT5 ES terminals / for XT6 800 A EF terminals
- Dim. 150 mm - plan empty modules on the connection side
- One current transformer can be installed per phase

Height		Width		I_n	Equipment			Usable in enclosure types depth:			Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	SU	WR*2	400 mm	425 mm	625 mm	Type	Order code	Type	Order code
4	600	2	500	630	630A XT5	96	2 x	●	●	●	MBX208LX	2CPX044092R9999	MX208LX	2CPX044101R9999
4	600	2	500	630	630A XT5 RC, bottom	96	2 x	●	●	●	MBX208LXB	2CPX044093R9999	MX208LXB	2CPX044102R9999
4	600	2	500	1000	1000A XT6	96	2 x	●	●	●	MBX210LX	2CPX044095R9999	MX210LX	2CPX044104R9999
4	600	2	500	1250	1250A XT7	96	2 x	●	–	●	MBX212LX	2CPX044113R9999	MX212LX	2CPX044114R9999

> Modules to be positioned centrally in the height of the cabinet

Distribution panel system CombiLine-X

Automatic transfer switch OT unequipped (MX…LA)

MX208LAM

- Incoming / outgoing module
- Unequipped for ABB circuit breaker, fixed assembly with connections on front side
  OT switch 3-/4-poles
- With all cross profiles required and busbar holder ZX522
- The mounting frames must be ordered separately.

Height		Width		I_n	Equipment			Usable in enclosure types depth:			Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	SU	WR*2	400 mm	425 mm	625 mm	Type	Order code	Type	Order code
4	600	2	500	800	OT630-800, lever on the left	96	2 x	●	–	●	MBX208LAL	2CPX044096R9999	MX208LAL	2CPX044105R9999
4	600	2	500	800	OT630-800, lever in the centre	96	2 x	●	–	●	MBX208LAM	2CPX044097R9999	MX208LAM	2CPX044106R9999
4	600	3	750	1000	OT1000-1250, lever on the left	144	2 x	●	–	●	MBX310LAL	2CPX044098R9999	MX310LAL	2CPX044107R9999
4	600	3	750	1000	OT1000-1250, lever in the centre	144	2 x	●	–	●	MBX310LAM	2CPX044099R9999	MX310LAM	2CPX044108R9999

> Modules to be positioned centrally in the height of the cabinet

Distribution panel system CombiLine-X

Automatic transfer switch (ATS) TruONE unequipped (MX…LU)

MX308LU

- Incoming terminal block
- Unequipped for ABB automatic transfer switch, fixed assembly with connections on front side
  ATS switch (TruOne)
  TruOne up 3-/4-poles
- With all cross profiles required and busbar holder ZX522
- The mounting frames must be ordered separately.

Height		Width		I_n	Equipment			Usable in enclosure types depth:			Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	A	Type	SU	WR*2	400 mm	425 mm	625 mm	Type	Order code	Type	Order code
4	600	3	750	800	ATS500-800 Module	144	2 x	●	–	●	MBX308LU	2CPX044100R9999	MX308LU	2CPX044109R9999

> Modules to be positioned centrally in the height of the cabinet

Distribution panel system CombiLine-X

N

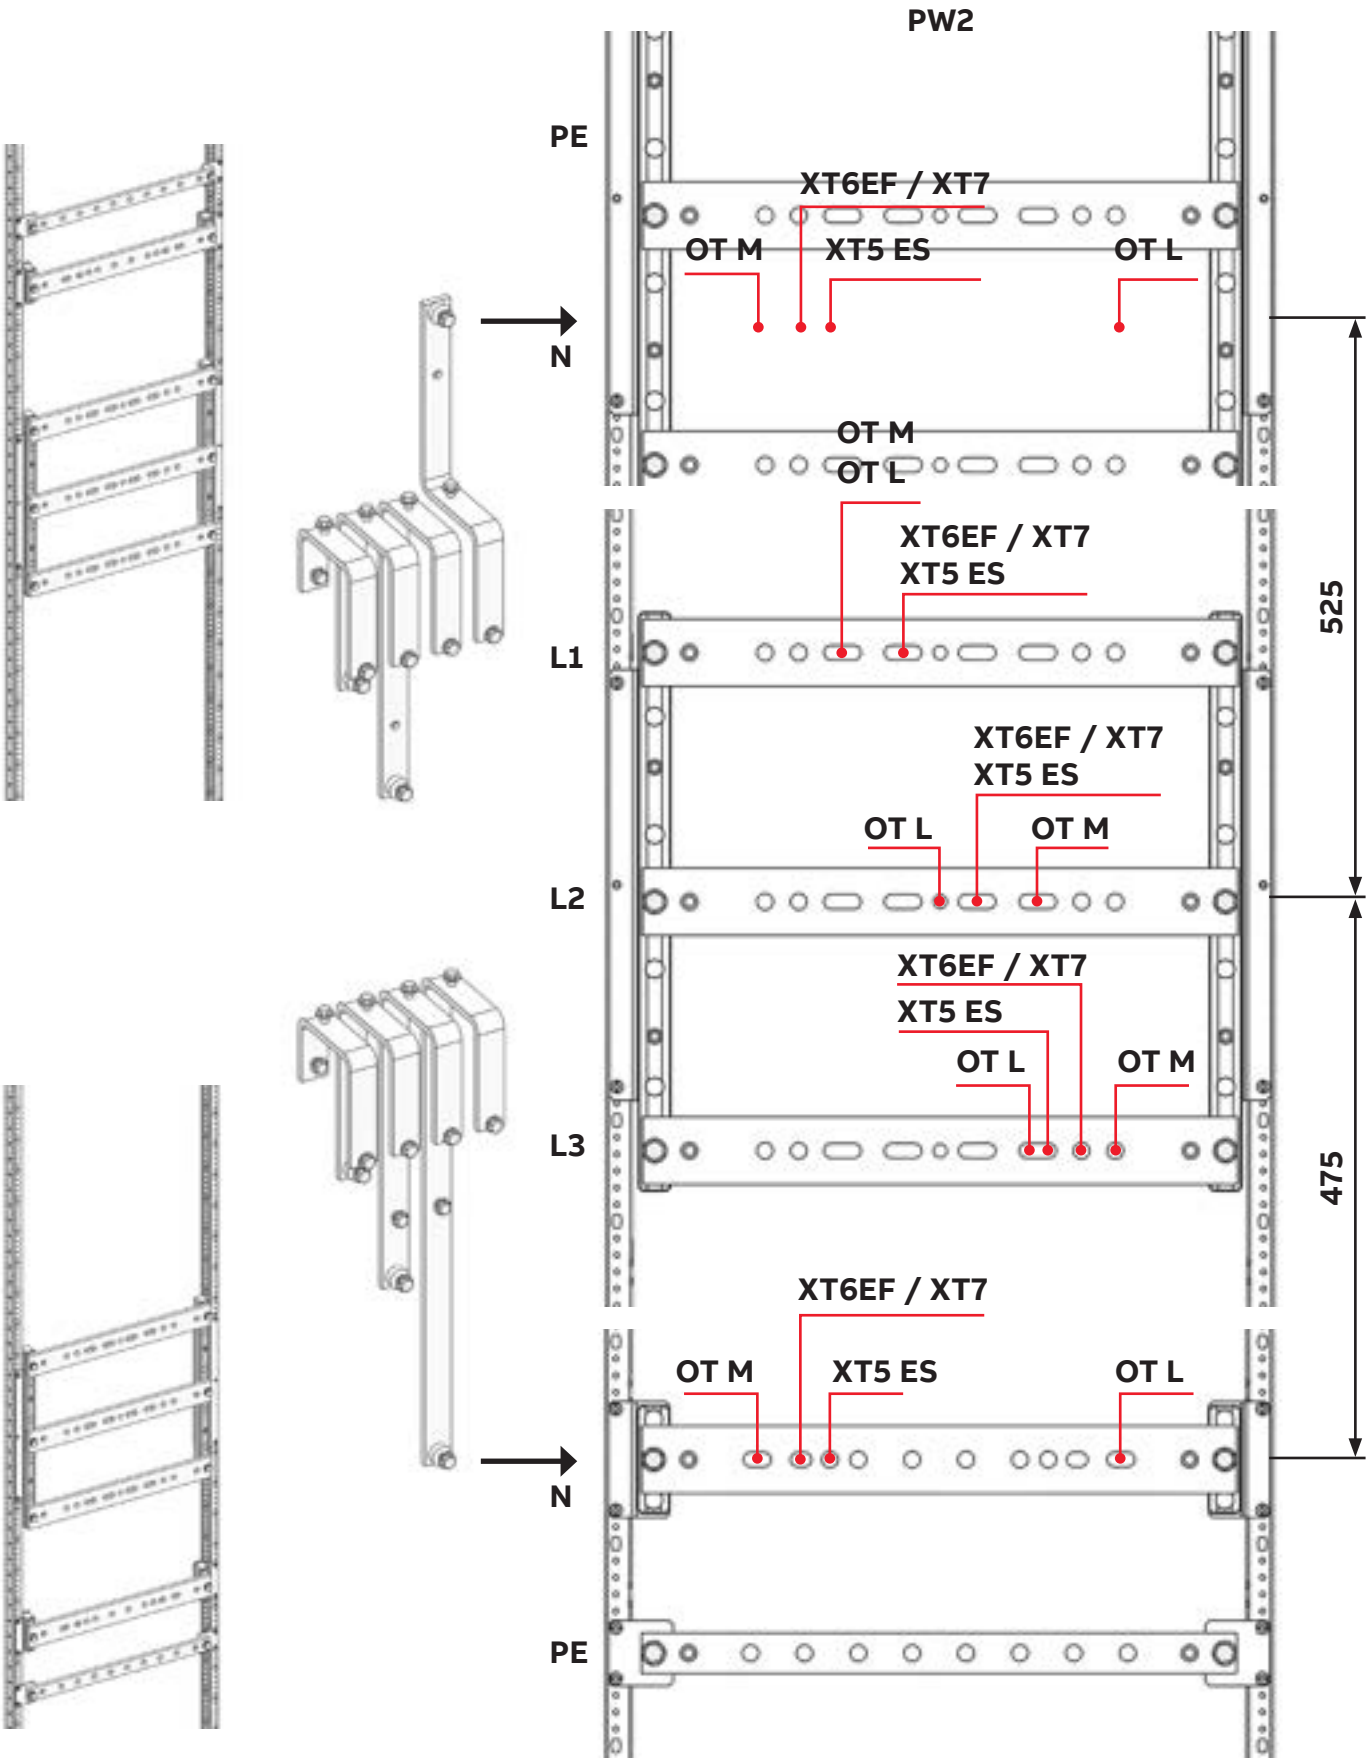

Distribution panel system CombiLine-X

N/PE horizontal busbar system, (M(B)X.7.N)

MX271N

- For 2-pole busbars
- With busbar holder, type ZX563
- Starting from width 3 with fastening in centre
- Rated current (I_n) max. 1000 A
- The mounting frames must be ordered separately.
- Earthed version

Height		Width				Usable in enclosure types depth:			Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	SU	WR*2	400 mm	425 mm	625 mm	Type	Order code	Type	Artikelnummer
2	300	1	250	36	2 x	●	●	●	MBX173N	2CPX047181R9999	MX173N	2CPX047184R9999
		2	500	72	2 x	●	●	●	MBX273N	2CPX047182R9999	MX273N	2CPX047186R9999
		3	750	108	2 x	●	●	●	MBX373N	2CPX047183R9999	MX373N	2CPX047186R9999
3	450	1	250	36	2 x	●	●	●	MBX171N	2CPX044115R9999	MX171N	2CPX044122R9999
		2	500	72	2 x	●	●	●	MBX271N	2CPX044116R9999	MX271N	2CPX044123R9999
		3	750	108	2 x	●	●	●	MBX371N	2CPX044117R9999	MX371N	2CPX044124R9999
4	600	1	250	48	2 x	●	●	●	MBX172N	2CPX044118R9999	MX172N	2CPX044125R9999
		2	500	96	2 x	●	●	●	MBX272N	2CPX044119R9999	MX272N	2CPX044126R9999
		3	750	144	2 x	●	●	●	MBX372N	2CPX044120R9999	MX372N	2CPX044127R9999

MX281N

- For 2-pole busbars
- With busbar holder, type ZX563
- Starting from width 3 with fastening in centre
- Rated current (I_n) max. 1000 A
- The mounting frames must be ordered separately.
- Double insulated version

Height		Width				Usable in enclosure types depth:			Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	SU	WR*2	400 mm	425 mm	625 mm	Type	Order code	Type	Artikelnummer
2	300	1	250	36	2 x	●	●	●	MBX183N	2CPX047187R9999	MX183N	2CPX047190R9999
		2	500	72	2 x	●	●	●	MBX283N	2CPX047188R9999	MX283N	2CPX047191R9999
		3	750	108	2 x	●	●	●	MBX383N	2CPX047189R9999	MX383N	2CPX047192R9999
3	450	1	250	36	2 x	●	●	●	MBX181N	2CPX044128R9999	MX181N	2CPX044134R9999
		2	500	72	2 x	●	●	●	MBX281N	2CPX044129R9999	MX281N	2CPX044135R9999
		3	750	108	2 x	●	●	●	MBX381N	2CPX044130R9999	MX381N	2CPX044136R9999
4	600	1	250	48	2 x	●	●	●	MBX182N	2CPX044131R9999	MX182N	2CPX044137R9999
		2	500	96	2 x	●	●	●	MBX282N	2CPX044132R9999	MX282N	2CPX044138R9999
		3	750	144	2 x	●	●	●	MBX382N	2CPX044133R9999	MX382N	2CPX044139R9999

Distribution panel system CombiLine-X

Connection busbar system, Tmax circuit breaker

ZX2612

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **Tmax XT5**, fixed assembly with connections on front side (with ES connection, to be ordered separately)
- Distance between centres of connections 58 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- holder set not included in scope of delivery and to be ordered separately
- ES terminals to be ordered separately

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
40 x 10	630	3 poles	1	ZX2610	2CPX044242R9999	ZXM2610	2CPX044315R9999
40 x 10	630	3-pole + N on top	1	ZX2611	2CPX044243R9999	ZXM2611	2CPX044316R9999
40 x 10	630	3-pole + N on bottom	1	ZX2612	2CPX044244R9999	ZXM2612	2CPX044317R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

ZX2615

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **Tmax XT6 (800 A)**, fixed assembly with connections on front side (with EF connection, to be ordered separately)
- Distance between centres of connections 70.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- holder set not included in scope of delivery and to be ordered separately
- EF terminals to be ordered separately

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
40 x 10	800	3 poles	1	ZX2613	2CPX044245R9999	ZXM2613	2CPX044318R9999
40 x 10	800	3-pole + N on top	1	ZX2614	2CPX044246R9999	ZXM2614	2CPX044319R9999
40 x 10	800	3-pole + N on bottom	1	ZX2615	2CPX044247R9999	ZXM2615	2CPX044320R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

Distribution panel system CombiLine-X

Connection busbar system, Tmax circuit breaker

ZX2618

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **Tmax XT6 (1000 A)**, fixed assembly with connections on front side
- Distance between centres of connections 70.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- holder set not included in scope of delivery and to be ordered separately

Cu busbars	I_n			Kit not installed			Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	EUR	Type	Order code
50 x 10	1000	3 poles	1	ZX2616	2CPX044248R9999	515.00	ZXM2616	2CPX044321R9999
50 x 10	1000	3-pole + N on top	1	ZX2617	2CPX044249R9999	672.00	ZXM2617	2CPX044322R9999
50 x 10	1000	3-pole + N on bottom	1	ZX2618	2CPX044250R9999	743.00	ZXM2618	2CPX044323R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

ZX2633

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **Tmax XT7 (1250 A)**, fixed assembly with connections on front side
- Distance between centres of connections 70.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- holder set not included in scope of delivery and to be ordered separately

Cu busbars	I_n			Kit not installed			Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	EUR	Type	Order code
2 x 50 x 10	1000	3 poles	1	ZX2631	2CPX044428R9999	644.00	ZXM2631	2CPX044431R9999
2 x 50 x 10	1000	3-pole + N on top	1	ZX2632	2CPX044429R9999	806.00	ZXM2632	2CPX044432R9999
2 x 50 x 10	1000	3-pole + N on bottom	1	ZX2633	2CPX044430R9999	896.00	ZXM2633	2CPX044433R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

Distribution panel system CombiLine-X

Connection busbar system, OT/ATS switches

ZX2621

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **OT800 (800 A)**, fixed assembly with connections on front side
- Distance between centres of connections 65.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- holder set not included in scope of delivery and to be ordered separately

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
40 x 10	800	3 poles	1	ZX2619	2CPX044251R9999	ZXM2619	2CPX044324R9999
40 x 10	800	3-pole + N on top	1	ZX2620	2CPX044252R9999	ZXM2620	2CPX044325R9999
40 x 10	800	3-pole + N on bottom	1	ZX2621	2CPX044253R9999	ZXM2621	2CPX044326R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

ZX2624

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **OT1000-1250 (800 A)**, fixed assembly with connections on front side
- Distance between centres of connections 70.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- holder set not included in scope of delivery and to be ordered separately

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
40 x 10	800	3 poles	1	ZX2622	2CPX044254R9999	ZXM2622	2CPX044327R9999
40 x 10	800	3-pole + N on top	1	ZX2623	2CPX044255R9999	ZXM2623	2CPX044328R9999
40 x 10	800	3-pole + N on bottom	1	ZX2624	2CPX044256R9999	ZXM2624	2CPX044329R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

Distribution panel system CombiLine-X

Connection busbar system, OT/ATS switches

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **OT1000-1250 (1000 A)**, fixed assembly with connections on front side
- Distance between centres of connections 65.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- holder set not included in scope of delivery and to be ordered separately

ZX2627

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
50 x 10	1000	3 poles	1	ZX2625	2CPX044257R9999	ZXM2625	2CPX044330R9999
50 x 10	1000	3-pole + N on top	1	ZX2626	2CPX044258R9999	ZXM2626	2CPX044331R9999
50 x 10	1000	3-pole + N on bottom	1	ZX2627	2CPX044259R9999	ZXM2627	2CPX044332R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **ATS800 (800 A)**, fixed assembly with connections on front side
- Distance between centres of connections 65.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- holder set not included in scope of delivery and to be ordered separately

ZX2630

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
40 x 10	800	3 poles	1	ZX2628	2CPX044260R9999	ZXM2628	2CPX044333R9999
40 x 10	800	3-pole + N on top	1	ZX2629	2CPX044261R9999	ZXM2629	2CPX044334R9999
40 x 10	800	3-pole + N on bottom	1	ZX2630	2CPX044262R9999	ZXM2630	2CPX044335R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

Distribution panel system CombiLine-X

N/PE horizontal busbar system 185mm distance

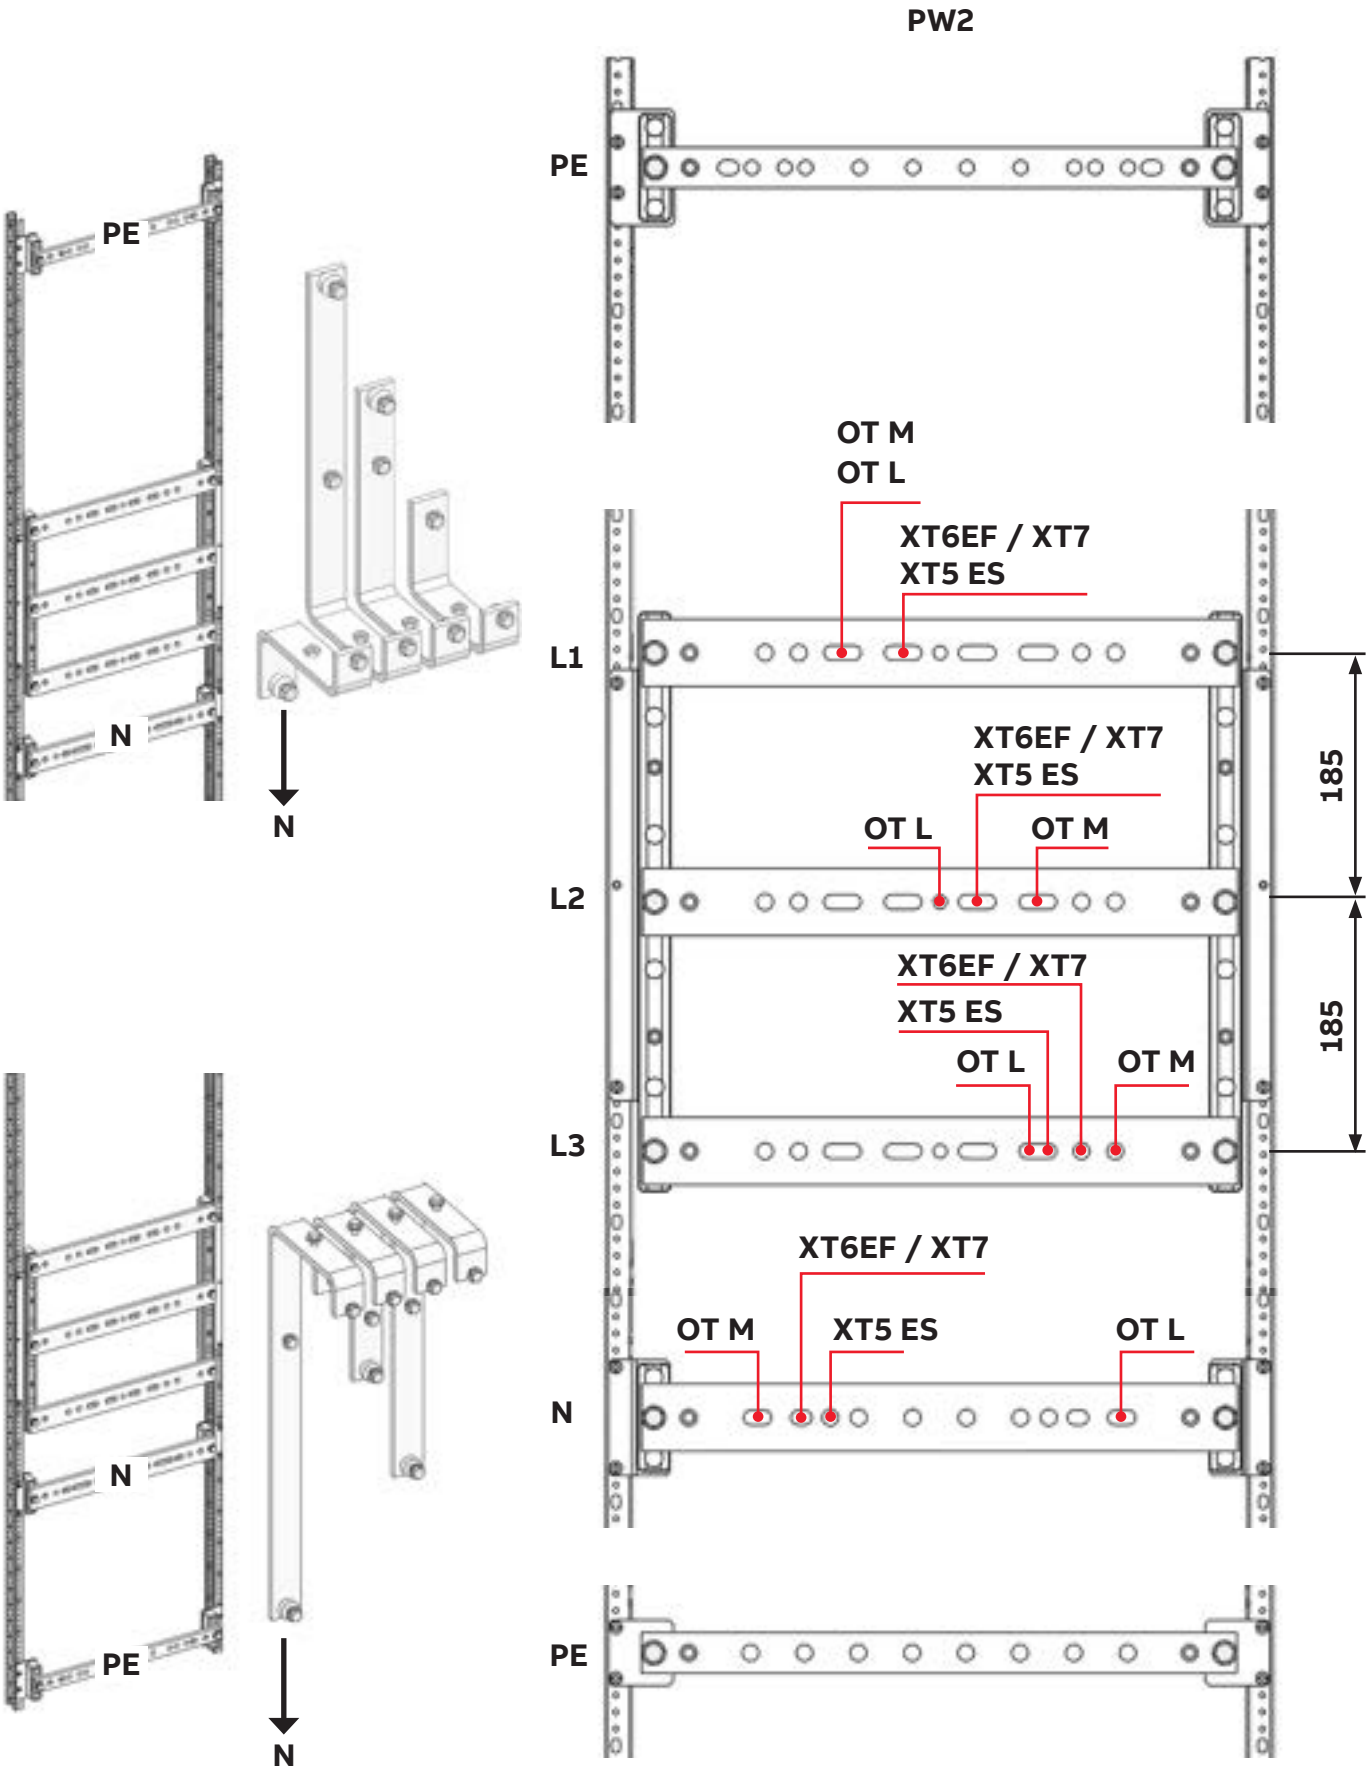

Distribution panel system CombiLine-X

N/PE horizontal busbar system, M(B)X.7.N / M(B)X.7.P / M(B)X.8.P

MX270N

- For N-busbars
- With busbar holder, type ZX563
- Starting from width 3 with fastening in centre
- Rated current (I_n) max. 1000 A
- The mounting frames must be ordered separately
- Earthed and double insulated version

Height		Width				Usable in enclosure types depth:			Kit not installed		Mounted and installed in the cabinet	
GU	mm	OW	mm	SU	WR*2	400 mm	425 mm	625 mm	Type	Order code	Type	Order code
1	150	1	250	12	2 x	●	●	●	MBX170N	2CPX044161R9999	MX170N	2CPX044140R9999
		2	500	24	2 x	●	●	●	MBX270N	2CPX044162R9999	MX270N	2CPX044141R9999
		3	750	36	2 x	●	●	●	MBX370N	2CPX044163R9999	MX370N	2CPX044142R9999

* N module always mounted below incomer/outgoing module (4-pole-system)

MX270P

- For PE-busbars
- Starting from width 3 with fastening in centre
- Rated current (I_n) max. 1000 A
- The mounting frames must be ordered separately.
- Earthed version

Height		Width				Usable in enclosure types depth:			Kit not installed		Mounted and installed in the cabinet	
GU	mm	PW	mm	SU	WR*2	400 mm	425 mm	625 mm	Type	Order code	Type	Order code
1	150	1	250	12	2 x	●	●	●	MBX170P	2CPX044164R9999	MX170P	2CPX044143R9999
		2	500	24	2 x	●	●	●	MBX270P	2CPX044165R9999	MX270P	2CPX044144R9999
		3	750	26	2 x	●	●	●	MBX370P	2CPX044166R9999	MX370P	2CPX044145R9999

* PE module can be mounted on top/bottom side of the enclosure

MX280P

- For PE-busbars
- With busbar holder, type ZX563
- Starting from width 3 with fastening in centre
- Rated current (I_n) max. 1000 A
- The mounting frames must be ordered separately
- Double insulated version

Height		Width				Usable in enclosure types depth:			Kit not installed		Mounted and installed in the cabinet	
GU	mm	OW	mm	SU	WR*2	400 mm	425 mm	625 mm	Type	Order code	Type	Order code
1	150	1	250	12	2 x	●	●	●	MBX180P	2CPX044167R9999	MX180P	2CPX044146R9999
		2	500	24	2 x	●	●	●	MBX280P	2CPX044168R9999	MX280P	2CPX044147R9999
		3	750	36	2 x	●	●	●	MBX380P	2CPX044169R9999	MX380P	2CPX044148R9999

* PE module can be mounted on top/bottom side of the enclosure

Distribution panel system CombiLine-X

Connection busbar system, Tmax circuit breaker

ZX2912

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **Tmax XT5**, fixed assembly with connections on front side (with ES connection, to be ordered separately)
- Distance between centres of connections 58 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- Holder set not included in scope of delivery and to be ordered separately
- ES terminals to be ordered separately

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
40 x 10	630	3-pole + N / cable connection on top	1	ZX2911	2CPX044445R9999	ZXM2911	2CPX044461R9999
40 x 10	630	3-pole + N / cable connection on bottom	1	ZX2912	2CPX044446R9999	ZXM2912	2CPX044462R9999

ZX2915

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **Tmax XT6 (800 A)**, fixed assembly with connections on front side (with EF connection, to be ordered separately)
- Distance between centres of connections 70.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- Holder set not included in scope of delivery and to be ordered separately
- EF terminals to be ordered separately

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
40 x 10	800	3-pole + N / cable connection on top	1	ZX2914	2CPX044447R9999	ZXM2914	2CPX044463R9999
40 x 10	800	3-pole + N / cable connection on bottom	1	ZX2915	2CPX044448R9999	ZXM2915	2CPX044464R9999

Distribution panel system CombiLine-X

Connection busbar system, Tmax circuit breaker

ZX2918

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **Tmax XT6 (1000 A)**, fixed assembly with connections on front side
- Distance between centres of connections 70.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- Holder set not included in scope of delivery and to be ordered separately

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
50 x 10	1000	3-pole + N / cable connection on top	1	ZX2917	2CPX044449R9999	ZXM2917	2CPX044465R9999
50 x 10	1000	3-pole + N / cable connection on bottom	1	ZX2918	2CPX044450R9999	ZXM2918	2CPX044466R9999

ZX2933

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **Tmax XT7 (1250 A)**, fixed assembly with connections on front side
- Distance between centres of connections 70.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- Holder set not included in scope of delivery and to be ordered separately

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
2 x 50 x 10	1000	3-pole + N / cable connection on top	1	ZX2932	2CPX044421R9999	ZXM2932	2CPX044467R9999
2 x 50 x 10	1000	3-pole + N / cable connection on bottom	1	ZX2933	2CPX044452R9999	ZXM2933	2CPX044468R9999

Distribution panel system CombiLine-X

Connection busbar system, OT/ATS switches

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **OT800 (800 A)**, fixed assembly with connections on front side
- Distance between centres of connections 65.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- Holder set not included in scope of delivery and to be ordered separately

ZX2921

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
40 x 10	800	3-pole + N / cable connection on top	1	ZX2920	2CPX044453R9999	ZXM2920	2CPX044469R9999
40 x 10	800	3-pole + N / cable connection on bottom	1	ZX2921	2CPX044454R9999	ZXM2921	2CPX044470R9999

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **OT1000-1250 (800 A)**, fixed assembly with connections on front side
- Distance between centres of connections 70.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- Holder set not included in scope of delivery and to be ordered separately

ZX2924

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
40 x 10	800	3-pole + N / cable connection on top	1	ZX2923	2CPX044455R9999	ZXM2923	2CPX044471R9999
40 x 10	800	3-pole + N / cable connection on bottom	1	ZX2924	2CPX044456R9999	ZXM2924	2CPX044472R9999

Distribution panel system CombiLine-X

Connection busbar system, OT/ATS switches

ZX2927

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **OT1000-1250 (1000 A)**, fixed assembly with connections on front side
- Distance between centres of connections 65.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- Holder set not included in scope of delivery and to be ordered separately

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
50 x 10	1000	3-pole + N / cable connection on top	1	ZX2926	2CPX044457R9999	ZXM2926	2CPX044473R9999
50 x 10	1000	3-pole + N / cable connection on bottom	1	ZX2927	2CPX044458R9999	ZXM2927	2CPX044474R9999

ZX2930

- Connection busbar system made of copper
- Connection of incoming/outgoing circuit-breaker to main busbar system
- ABB breaker **ATS800 (800 A)**, fixed assembly with connections on front side
- Distance between centres of connections 65.0 mm
- One current transformer can be installed per phase
- Including all fastening screws for connecting the circuit-breaker and supporting set

Important:

- Holder set not included in scope of delivery and to be ordered separately

Cu busbars	I_n			Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	Unit	Type	Order code	Type	Order code
40 x 10	800	3-pole + N / cable connection on top	1	ZX2929	2CPX044459R9999	ZXM2929	2CPX044475R9999
40 x 10	800	3-pole + N / cable connection on bottom	1	ZX2930	2CPX044460R9999	ZXM2930	2CPX044476R9999

Distribution panel system CombiLine-X

holder set connecting busbar system

ZX2652

- Connecting busbar system holder set made of GFRP
- Connection of incoming/outgoing module to the main busbar system
- ABB **Tmax XT5** switch, fixed assembly with connections on front side
- Distance between centres of connections 46.5 mm

Cu busbars	I_n				Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	CBB holder L	Unit	Type	Order code	Type	Order code
40 x 10	630	3-pole	148 mm	2	ZX2650	2CPX044410R9999	ZXM2650	2CPX044390R9999
40 x 10	630	3-pole + N on top	202 mm	2	ZX2651	2CPX044411R9999	ZXM2651	2CPX044391R9999
40 x 10	630	3-pole + N on bottom	202 mm	2	ZX2652	2CPX044412R9999	ZXM2652	2CPX044392R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

ZX2658

- Connecting busbar system holder set made of GFRP
- Connection of incoming/outgoing module to the main busbar system
- ABB **Tmax XT6/XT7** switch, fixed assembly with connections on front side
- Distance between centres of connections 70.0 mm

Cu busbars	I_n				Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	CBB holder L	Unit	Type	Order code	Type	Order code
40 x 10/50 x 10	800/1000	3-pole	190 mm	2	ZX2656	2CPX044413R9999	ZXM2656	2CPX044393R9999
40 x 10/50 x 10	800/1000	3-pole + N on top	260 mm	2	ZX2657	2CPX044414R9999	ZXM2657	2CPX044394R9999
40 x 10/50 x 10	800/1000	3-pole + N on bottom	260 mm	2	ZX2658	2CPX044415R9999	ZXM2658	2CPX044395R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

ZX2661

- Connecting busbar system holder set made of GFRP
- Connection of incoming/outgoing module for main busbar system
- ABB **OT800 (800 A) lever on the left/ATS500-800**, fixed assembly with connections on front side
- Distance between centres of connections 65.0 mm

Cu busbars	I_n				Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	CBB holder L	Unit	Type	Order code	Type	Order code
40 x 10	800	3 poles	170 mm	2	ZX2659	2CPX044416R9999	ZXM2659	2CPX044396R9999
40 x 10	800	3-pole + N on top	235 mm	2	ZX2660	2CPX044417R9999	ZXM2660	2CPX044397R9999
40 x 10	800	3-pole + N on bottom	235 mm	2	ZX2661	2CPX044418R9999	ZXM2661	2CPX044398R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

Distribution panel system CombiLine-X

holder set connecting busbar system

ZX2664

- Connecting busbar system holder set made of GFRP
- Connection of incoming/outgoing module to the main busbar system
- ABB **OT800 (800 A) lever in the centre**, fixed assembly with connections on front side
- Distance between centres of connections 65.0 mm

Cu busbars	I_n				Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	CBB holder L	Unit	Type	Order code	Type	Order code
40 x 10	800	3-pole	35 mm	2	ZX2662	2CPX044419R9999	ZXM2662	2CPX044399R9999
40 x 10	800	3-pole + N on top	300 mm	2	ZX2663	2CPX044420R9999	ZXM2663	2CPX044400R9999
40 x 10	800	3-pole + N on bottom	300 mm	2	ZX2664	2CPX044421R9999	ZXM2664	2CPX044401R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

ZX2667

- Connecting busbar system holder set made of GFRP
- Connection of incoming/outgoing module to the main busbar system
- ABB switch **OT1000-1250 (1000 A) lever on the left**, fixed assembly with connections on front side
  Distance between centres of connections 80.0 mm

Cu busbars	I_n				Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	CBB holder L	Unit	Type	Order code	Type	Order code
50 x 10	1000	3-pole	210 mm	2	ZX2665	2CPX044422R9999	ZXM2665	2CPX044402R9999
50 x 10	1000	3-pole + N on top	290 mm	2	ZX2666	2CPX044423R9999	ZXM2666	2CPX044403R9999
50 x 10	1000	3-pole + N on bottom	290 mm	2	ZX2667	2CPX044424R9999	ZXM2667	2CPX044404R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

ZX2670

- Connecting busbar system holder set made of GFRP
- Connection of incoming/outgoing module to the main busbar system
- ABB switch **OT1000-1250 (1000 A) lever in the centre** , fixed assembly with connections on front side
- Distance between centres of connections 80.0 mm

Cu busbars	I_n				Kit not installed		Mounted and installed in the cabinet	
mm	A	Description	CBB holder L	Unit	Type	Order code	Type	Order code
50 x 10	1000	3-pole	290 mm	2	ZX2668	2CPX044425R9999	ZXM2668	2CPX044405R9999
50 x 10	1000	3-pole + N on top	374 mm	2	ZX2669	2CPX044426R9999	ZXM2669	2CPX044406R9999
50 x 10	1000	3-pole + N on bottom	300 mm	2	ZX2670	2CPX044427R9999	ZXM2670	2CPX044407R9999

> N on top = N across from breaker conection side; N on bottom = N on same side as breaker conncetion side

Distribution panel system CombiLine-X

Main busbar system (MBB) and holder set

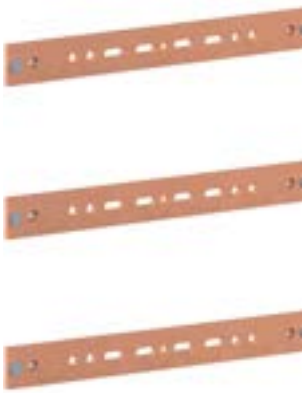

ZX2692

- Universal busbars made of copper
- For incoming/outgoing modules
- Prepared to be fitted with **XT5/XT6/XT7/OT630-800-1000-1250/ATS500-800**
- Including fastening elements
- For the position of the different switch variants see mounting instructions
- Prepared for side-by-side cabinet connection on both sides

	I_n	Cu busbars			Flatpack not assembled		Assembled Fitted in the cabinet	
PW	A	mm	Description	Unit	Type	Order code	Type	Order code
2	630	30 x 10	HSS 630 A	3	ZX2690	2CPX044263R9999	ZXM2690	2CPX044336R9999
	850	40 x 10	XT5/XT6/XT7/OT630-800	3	ZX2691	2CPX044264R9999	ZXM2691	2CPX044337R9999
	1000	50 x 10	XT5/XT6/XT7/OT630-800	3	ZX2692	2CPX044265R9999	ZXM2692	2CPX044338R9999
3	630	30 x 10	HSS 630 A	3	ZX2693	2CPX044266R9999	ZXM2693	2CPX044339R9999
	850	40 x 10	OT1000-1250/ATS500-800	3	ZX2694	2CPX044267R9999	ZXM2694	2CPX044340R9999
	1000	50 x 10	OT1000-1250/ATS500-800	3	ZX2695	2CPX044268R9999	ZXM2695	2CPX044341R9999

Article	Description	Unit	Flatpack not assembled		Assembled Fitted in the cabinet	
			Type	Order code	Type	Order code
	MBB holder set 185 mm For PW 2 and 3, consisting of brackets (ZX522) and busbar holders, incl. fastening material*	1	ZX2700	2CPX044408R9999	ZXM2700	2CPX044388R9999

ZX2700

* included in the modules' scope of delivery

Distribution panel system CombiLine-X

N/PE busbars and holder set

ZX2722

- N/PE Universal busbars made of copper
- For incoming/outgoing modules
- Including fastening elements
- For the position of the different switch variants see mounting instructions
- Prepared for side-by-side cabinet connection on both sides
- The current carrying capacity is 100 % of the outer conductors of the MBB.

	I_n	Cu busbars			Kit not installed		Mounted and installed in the cabinet	
PW	A	mm	Description	Unit	Type	Order code	Type	Order code
1	630	30 x 10	N/PE 630 A	1	ZX2717	2CPX042333R9999	ZXM2717	2CPX042441R9999
	850	40 x 10	N/PE 850 A	1	ZX2718	2CPX042334R9999	ZXM2718	2CPX042442R9999
	1000	50 x 10	N/PE 1000 A	1	ZX2719	2CPX042335R9999	ZXM2719	2CPX042443R9999
2	630	30 x 10	N/PE 630 A	1	ZX2720	2CPX044269R9999	ZXM2720	2CPX044342R9999
	850	40 x 10	N/PE -XT5/XT6/XT7/OT630-800	1	ZX2721	2CPX044270R9999	ZXM2721	2CPX044343R9999
	1000	50 x 10	N/PE -XT5/XT6/XT7/OT630-800	1	ZX2722	2CPX044271R9999	ZXM2722	2CPX044344R9999
3	630	30 x 10	N/PE 630 A	1	ZX2723	2CPX044272R9999	ZXM2723	2CPX044345R9999
	850	40 x 10	N/PE - OT1000-1250/ATS500-800	1	ZX2724	2CPX044273R9999	ZXM2724	2CPX044346R9999
	1000	50 x 10	N/PE - OT1000-1250/ATS500-800	1	ZX2725	2CPX044274R9999	ZXM2725	2CPX044347R9999

ZX2742

- PE Universal busbars made of copper
- Including fastening elements
- Prepared for side-by-side cabinet connection on both sides
- The current carrying capacity is 50 % of the outer conductors of the MBB.

	I_n	Cu busbars			Kit not installed		Mounted and installed in the cabinet	
PW	A	mm	Description	Unit	Type	Order code	Type	Order code
1	630	30 x 5	Cu busbar PE (50 %)	1	ZX2737	2CPX042336R9999	ZXM2737	2CPX042444R9999
	850	20 x 10	Cu busbar PE (50 %)	1	ZX2738	2CPX042337R9999	ZXM2738	2CPX042445R9999
	1000	30 x 10	Cu busbar PE (50 %)	1	ZX2739	2CPX042338R9999	ZXM2739	2CPX042446R9999
2	630	30 x 5	Cu busbar PE (50 %)	1	ZX2740	2CPX044275R9999	ZXM2740	2CPX044348R9999
	850	20 x 10	Cu busbar PE (50 %)	1	ZX2741	2CPX044276R9999	ZXM2741	2CPX044349R9999
	1000	30 x 10	Cu busbar PE (50 %)	1	ZX2742	2CPX044277R9999	ZXM2742	2CPX044350R9999
3	630	30 x 5	Cu busbar PE (50 %)	1	ZX2743	2CPX044278R9999	ZXM2743	2CPX044351R9999
	850	20 x 10	Cu busbar PE (50 %)	1	ZX2744	2CPX044279R9999	ZXM2744	2CPX044352R9999
	1000	30 x 10	Cu busbar PE (50 %)	1	ZX2745	2CPX044280R9999	ZXM2745	2CPX044353R9999

Article		Description	Unit	Kit not installed		Mounted and installed in the cabinet	
				Type	Order code	Type	Order code
		Horizontal holder set For N-connection consisting of mounting brackets and busbar holders (ZX563), incl. fastening material* up to 50 x 10 (1000 A)					
		earthed	1	ZX2760	2CPX044409R9999	ZXM2760	2CPX044389R9999
ZXM2760	**ZXM2761**	double insulated	1	ZX2761	2CPX043457R9999	ZXM2761	2CPX043459R9999

* included in the modules' scope of delivery

Distribution panel system CombiLine-X

N and PE busbars, vertical and central earthing point (CEP), ⏚

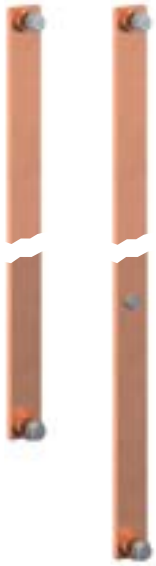

ZX2856 ZX2852

- N universal busbars made of copper
- For the link from bottom to top compartment
- Including fastening elements
- The current carrying capacity is 100 % (N) and 50 % (PE) of the outer conductors of the MBB.
- The holder set ZX(M)2860P2 must be ordered separately.
- Earthed version

I_n	Cu busbars			Kit not installed		Mounted and installed in the cabinet	
A	mm	Description	Unit	Type	Order code	Type	Order code
630	30 x 10	Cu busbar N, vertical	1	ZX2855	2CPX043445R9999	ZXM2855	2CPX044439R9999
800	40 x 10	Cu-busbar N, vertical	1	ZX2856	2CPX043446R9999	ZXM2856	2CPX044440R9999
1000	50 x 10	Cu-busbar N, vertical	1	ZX2857	2CPX043447R9999	ZXM2857	2CPX044441R9999
630	30 x 5	Cu busbar PE, vertical	1	ZX2850	2CPX043440R9999	ZXM2850	2CPX044434R9999
800	20 x 10	Cu busbar PE, vertical	1	ZX2851	2CPX043441R9999	ZXM2851	2CPX044435R9999
1000	30 x 10	Cu busbar PE, vertical	1	ZX2852	2CPX043442R9999	ZXM2852	2CPX044436R9999
800	40 x 10	Cu busbar PE, vertical	1	ZX2853	2CPX043443R9999	ZXM2853	2CPX044437R9999
1000	50 x 10	Cu busbar PE, vertical	1	ZX2854	2CPX043444R9999	ZXM2854	2CPX044438R9999

ZX2866

- Central earthing point made of copper
- For the link from bottom to top compartment
- PEN /N bar and the PE bar
- The current carrying capacity is 50 % of the outer conductors of the MBB.
- Earthed version

I_n	Cu busbars			Kit not installed		Mounted and installed in the cabinet	
A	mm	Description	Unit	Type	Order code	Type	Order code
630	30 x 10	Cu busbar ZEP	1	ZX2865	2CPX043448R9999	ZXM2865	2CPX044442R9999
800	40 x 10	Cu busbar ZEP	1	ZX2866	2CPX043449R9999	ZXM2866	2CPX044443R9999
1000	50 x 10	Cu busbar ZEP	1	ZX2867	2CPX043450R9999	ZXM2867	2CPX044444R9999

Article	Description	Unit	Kit not installed		Mounted and installed in the cabinet	
			Type	Order code	Type	Order code
	holder set for vertical N /PE bar, consisting of mounting brackets and busbar holders (ZX563) incl. fastening material up to 50 x 10 (1000 A)	2	ZX2860P2	2CPX062800R9999	ZXM2860P2	2CPX039277R9999

ZX2860P2

Distribution panel system CombiLine-X

N and PE busbars, vertical and central earthing point (CEP), ⧈

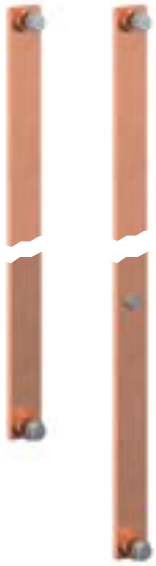

ZX2856 ZX2882

- N universal busbars made of copper
- For the link from bottom to top compartment
- Including fastening elements
- The current carrying capacity is 100 % (N) and 50 % (PE) of the outer conductors of the MBB.
- The holder set ZX(M)2860P2 must be ordered separately.
- Double insulated version

I_n	Cu busbars			Kit not installed		Mounted and installed in the cabinet	
A	mm	Description	Unit	Type	Order code	Type	Order code
630	30 x 10	Cu busbar N, vertical	1	ZX2855	2CPX043445R9999	ZXM2855	2CPX044439R9999
800	40 x 10	Cu-busbar N, vertical	1	ZX2856	2CPX043446R9999	ZXM2856	2CPX044440R9999
1000	50 x 10	Cu-busbar N, vertical	1	ZX2857	2CPX043447R9999	ZXM2857	2CPX044441R9999
630	30 x 5	Cu busbar PE, vertical	1	ZX2880	2CPX043461R9999	ZXM2880	2CPX043466R9999
800	20 x 10	Cu busbar PE, vertical	1	ZX2881	2CPX043462R9999	ZXM2881	2CPX043467R9999
1000	30 x 10	Cu busbar PE, vertical	1	ZX2882	2CPX043463R9999	ZXM2882	2CPX043468R9999
800	40 x 10	Cu busbar PE, vertical	1	ZX2883	2CPX043464R9999	ZXM2883	2CPX043469R9999
1000	50 x 10	Cu busbar PE, vertical	1	ZX2884	2CPX043465R9999	ZXM2884	2CPX043470R9999

ZX2876

- Central earthing point made of copper
- For the link from bottom to top compartment
- PEN /N bar and the PE bar
- The current carrying capacity is 50 % of the outer conductors of the MBB.
- Double insulated version

I_n	Cu busbars			Kit not installed		Mounted and installed in the cabinet	
A	mm	Description	Unit	Type	Order code	Type	Order code
630	30 x 10	Cu busbar ZEP	1	ZX2875	2CPX043451R9999	ZXM2875	2CPX043454R9999
800	40 x 10	Cu busbar ZEP	1	ZX2876	2CPX043452R9999	ZXM2876	2CPX043455R9999
1000	50 x 10	Cu busbar ZEP	1	ZX2877	2CPX043453R9999	ZXM2877	2CPX043456R9999

Article	Description	Unit	Kit not installed		Mounted and installed in the cabinet	
			Type	Order code	Type	Order code
	holder set for vertical N /PE bar, consisting of mounting brackets and busbar holders (ZX563) incl. fastening material up to 50 x 10 (1000 A)	2	ZX2861P2	2CPX043458R9999	ZXM2861P2	2CPX043460R9999

ZX2861P2

Distribution panel system CombiLine-X

Module to module copper connection

ZX2781 **ZX2784** **ZX2787**

- Module to module connector made of copper
- To connect Cu busbars
- The current carrying capacity of L1, L2, L3, N is 100 % and the current carrying capacity of PE is 50 % of the outer conductors of the MBB.

	I_n	Cu busbars			Kit not installed		Mounted and installed in the cabinet	
Connection	**A**	**mm**		**Unit**	**Type**	**Order code**	**Type**	**Order code**
MBB to MBB	630	30 x 10	FF-Cu connector HH 30 x 10	3	ZX2780	2CPX044281R9999	ZXM2780	2CPX044354R9999
	850	40 x 10	FF-Cu connector HH 40 x 10	3	ZX2781	2CPX044282R9999	ZXM2781	2CPX044355R9999
	1000	50 x 10	FF-Cu connector HH 50 x 10	3	ZX2782	2CPX044283R9999	ZXM2782	2CPX044356R9999
MBB to SBB	630	30 x 10	FF-Cu connector HV 30 x 10	3	ZX2783	2CPX044284R9999	ZXM2783	2CPX044357R9999
	850	40 x 10	FF-Cu connector HV 40 x 10	3	ZX2784	2CPX044285R9999	ZXM2784	2CPX044358R9999
	1000	50 x 10	FF-Cu connector HV 50 x 10	3	ZX2785	2CPX044286R9999	ZXM2785	2CPX044359R9999
SBB to SBB	630	30 x 10	FF-Cu connector VV 30 x 10	3	ZX2786	2CPX044287R9999	ZXM2786	2CPX044360R9999
	850	40 x 10	FF-Cu connector VV 40 x 10	3	ZX2787	2CPX044288R9999	ZXM2787	2CPX044361R9999
	1000	50 x 10	FF-Cu connector VV 50 x 10	3	ZX2788	2CPX044289R9999	ZXM2788	2CPX044362R9999
N/PE	630	30 x 10	FF-Cu connector N/PE 30 x 10	1	ZX2789	2CPX044290R9999	ZXM2789	2CPX044363R9999
N/PE	850	40 x 10	FF-Cu connector N/PE 40 x 10	1	ZX2790	2CPX044291R9999	ZXM2790	2CPX044364R9999
N/PE	1000	50 x 10	FF-Cu connector N/PE 50 x 10	1	ZX2791	2CPX044292R9999	ZXM2791	2CPX044365R9999
PE	630	30 x 5	FF-Cu connector PE 30 x 5	1	ZX2792	2CPX044293R9999	ZXM2792	2CPX044366R9999
PE	850	20 x 10	FF-Cu connector PE 20 x 10	1	ZX2793	2CPX044294R9999	ZXM2793	2CPX044367R9999
PE	1000	30 x 10	FF-Cu connector PE 30 x 10	1	ZX2794	2CPX044295R9999	ZXM2794	2CPX044368R9999

MBB = main busbar / SBB = sub busbar only for MD modules in combination with ZHBM (+EFM/ITS)
1-panel wide modules M(B)D... can only be expanded in one direction in the cabinet from MBB to SBB (moduel-module)

MBB to MBB

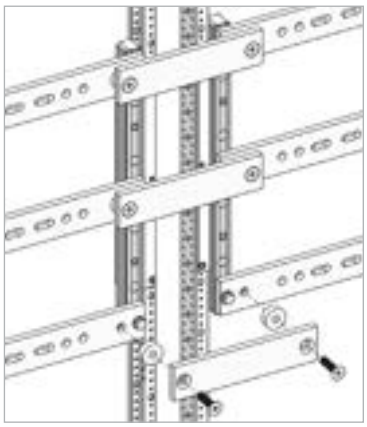

MBB to SBB

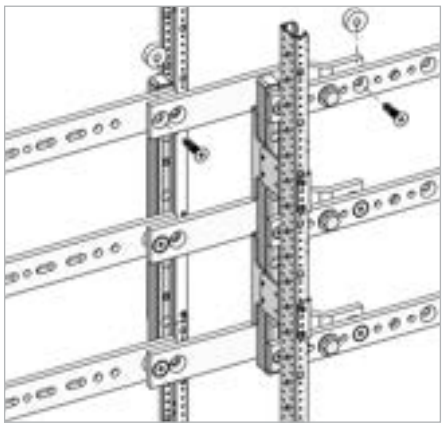

SBB to SBB

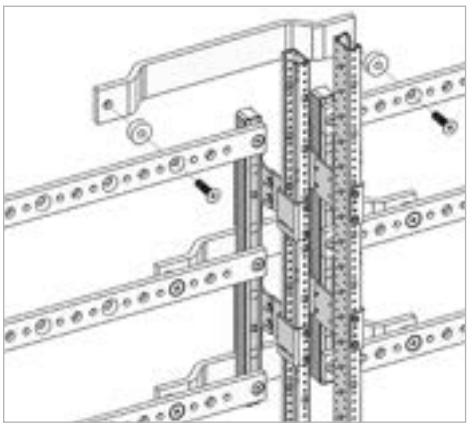

N/PE connection



Distribution panel system CombiLine-X

Cabinet to cabinet copper connection

ZX2810 **ZX2813** **ZX2816**

- Cabinet to cabinet connector made of copper
- To connect Cu busbars
- The current carrying capacity of L1, L2, L3, N is 100 % and the current carrying capacity of PE is 50 % of the outer conductors of the MBB.

Cabinet to cabinet connection TwinLine

	I_n	Cu busbars			Kit not installed	
Connection	**A**	**mm**		**Unit**	**Type**	**Order code**
MBB to MBB	630	30 x 10	SS-Cu connector HH 30 x 10	3	ZX2810	2CPX044296R9999
	850	40 x 10	SS-Cu connector HH 40 x 10	3	ZX2811	2CPX044297R9999
	1000	50 x 10	SS-Cu connector HH 50 x 10	3	ZX2812	2CPX044298R9999
MBB to SBB	630	30 x 10	SS-Cu connector HV 30 x 10	3	ZX2813	2CPX044299R9999
	850	40 x 10	SS-Cu connector HV 40 x 10	3	ZX2814	2CPX044300R9999
	1000	50 x 10	SS-Cu connector HV 50 x 10	3	ZX2815	2CPX044301R9999
SBB to SBB	630	30 x 10	SS-Cu connector VV 30 x 10	3	ZX2816	2CPX044302R9999
	850	40 x 10	SS-Cu connector VV 40 x 10	3	ZX2817	2CPX044303R9999
	1000	50 x 10	SS-Cu connector VV 50 x 10	3	ZX2818	2CPX044304R9999
N/PE	630	30 x 10	SS-Cu connector N/PE 30 x 10	1	ZX2819	2CPX044305R9999
N/PE	850	40 x 10	SS-Cu connector N/PE 40 x 10	1	ZX2820	2CPX044306R9999
N/PE	1000	50 x 10	SS-Cu connector N/PE 50 x 10	1	ZX2821	2CPX044307R9999
PE	630	30 x 5	SS-Cu connector PE 30 x 5	1	ZX2822	2CPX044308R9999
PE	850	20 x 10	SS-Cu connector PE 20 x 10	1	ZX2823	2CPX044309R9999
PE	1000	30 x 10	SS-Cu connector PE 30 x 10	1	ZX2824	2CPX044310R9999

MBB = main busbar / SBB = sub busbar only for MD modules in combination with ZHBM (+EFM/ITS)

Cabinet to cabinet connection TriLine C

	I_n	Cu busbars			Kit not installed	
Connection	**A**	**mm**		**Unit**	**Type**	**Order code**
MBB to MBB	630	30 x 10	SS-Cu connector HH 30 x 10	3	ZX3810	2CPX044477R9999
	850	40 x 10	SS-Cu connector HH 40 x 10	3	ZX3811	2CPX044478R9999
	1000	50 x 10	SS-Cu connector HH 50 x 10	3	ZX3812	2CPX044479R9999
MBB to SBB	630	30 x 10	SS-Cu connector HV 30 x 10	3	ZX3813	2CPX044480R9999
	850	40 x 10	SS-Cu connector HV 40 x 10	3	ZX3814	2CPX044481R9999
	1000	50 x 10	SS-Cu connector HV 50 x 10	3	ZX3815	2CPX044482R9999
SBB to SBB	630	30 x 10	SS-Cu connector VV 30 x 10	3	ZX3816	2CPX044483R9999
	850	40 x 10	SS-Cu connector VV 40 x 10	3	ZX3817	2CPX044484R9999
	1000	50 x 10	SS-Cu connector VV 50 x 10	3	ZX3818	2CPX044485R9999
N/PE	630	30 x 10	SS-Cu connector N/PE 30 x 10	1	ZX3819	2CPX044486R9999
N/PE	850	40 x 10	SS-Cu connector N/PE 40 x 10	1	ZX3820	2CPX044487R9999
N/PE	1000	50 x 10	SS-Cu connector N/PE 50 x 10	1	ZX3821	2CPX044488R9999
PE	630	30 x 5	SS-Cu connector PE 30 x 5	1	ZX3822	2CPX044489R9999
PE	850	20 x 10	SS-Cu connector PE 20 x 10	1	ZX3823	2CPX044490R9999
PE	1000	30 x 10	SS-Cu connector PE 30 x 10	1	ZX3824	2CPX044491R9999

MBB = main busbar / SBB = sub busbar only for MD modules in combination with ZHBM (+EFM/ITS)
1-panel wide modules M(B)D... can only be connected from MBB to SBB (cabinet to cabinet)

Distribution panel system CombiLine-X

Dimensions for installation in TwinLine X cabinet module on WR mounting frame

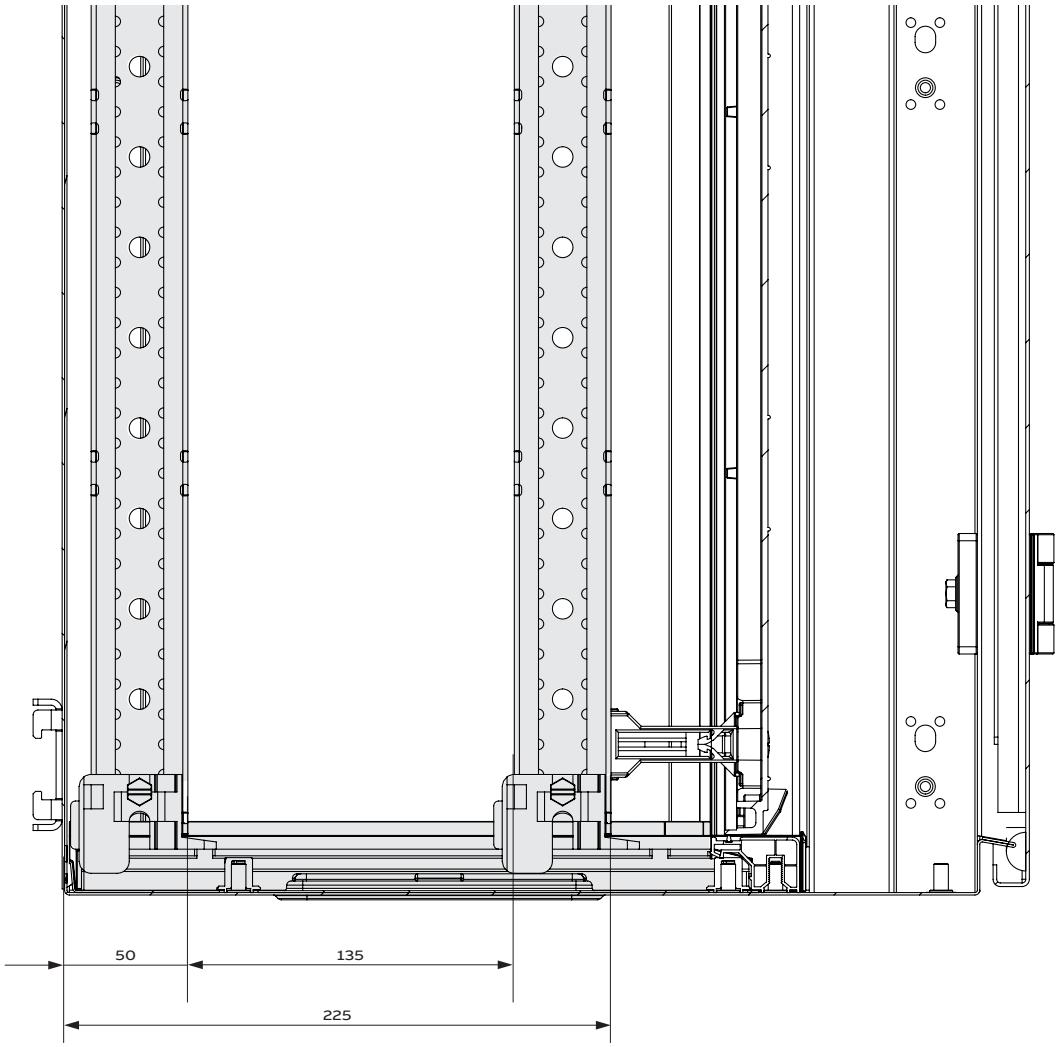

Mounting rail
Plan view

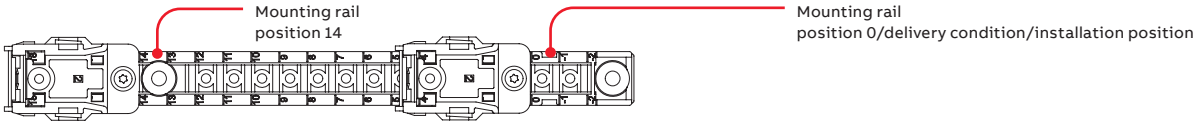

Distribution panel system CombiLine-X

Dimensions for installation in TriLine C cabinet

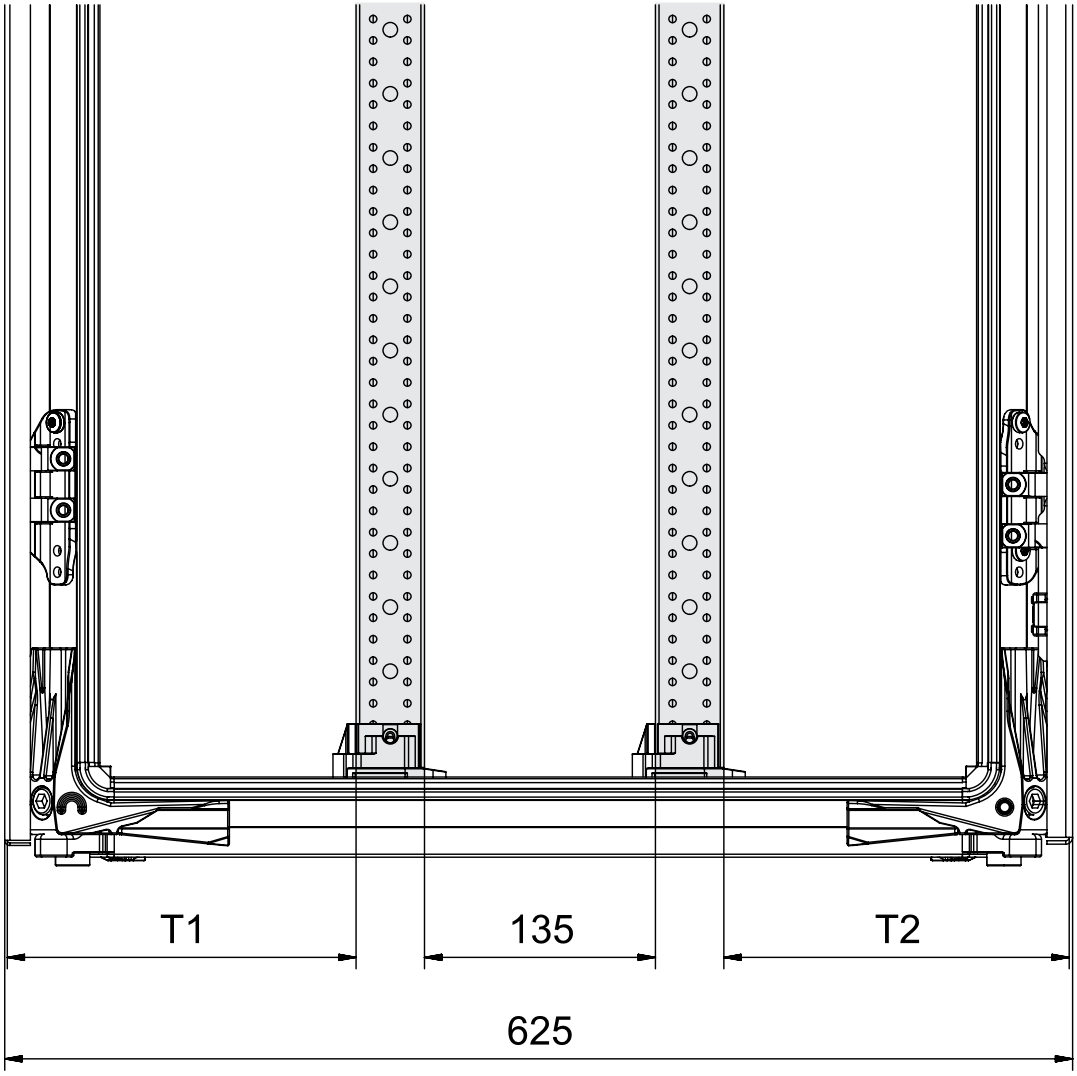

Mounting position of WR-holder
Top view

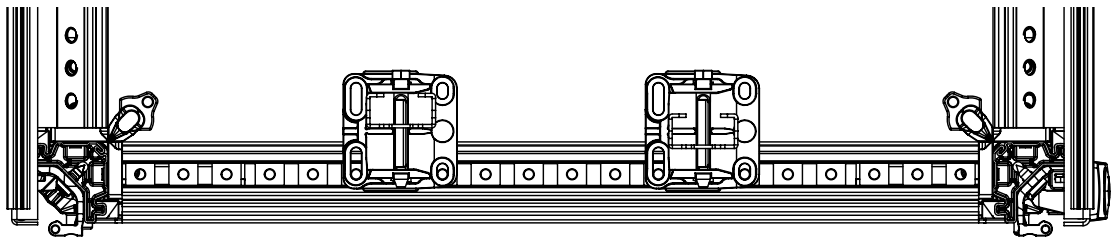

	Cabinet depth 426	Cabinet depth 625
Distance T1 from back-wall to WR-mounting frame in the back	79	204
Distance T2 from door to WR-mounting frame in the front	127	202

dimensions in mm

TwinLine busbars

Row mounting for modules M(B)S…24

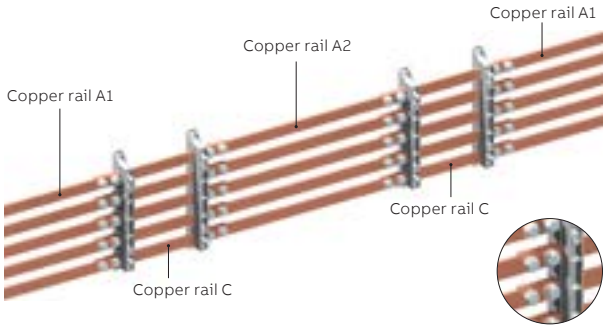

- It is possible to combine different module widths within the cabinet with continuous busbars
- Busbars for cabinet row mounting (copper rail A1/A2) are delivered on the connection side with copper transport pieces and attachment material
- A connector (copper rail C) is required for each busbar connection
- **Important**: note the possibility to combine modules with the TwinLine cabinet row mountings
- A max. of 5 copper rails A1/A2 and C are required per module

Copper rail	I_n	Width			Kit not installed		Mounted and installed in the cabinet	
mm	A	PW	mm	Unit	Type	Order code	Type	Order code
Copper rail A1, busbars for TwinLine cabinet row mounting right or left								
20 x 5	320	1	138 + 43	1	ZX2224	2CPX042630R9999	ZXM2224	2CPX042672R9999
		2	388 + 43	1	ZX2225	2CPX042631R9999	ZXM2225	2CPX042673R9999
		3	638 + 43	1	ZX2226	2CPX042632R9999	ZXM2226	2CPX042674R9999
		4	888 + 43	1	ZX2227	2CPX042633R9999	ZXM2227	2CPX042675R9999
		5	1138 + 43	1	ZX2228	2CPX042634R9999	ZXM2228	2CPX042676R9999
		6	1388 + 43	1	ZX2229	2CPX042635R9999	ZXM2229	2CPX042677R9999
Copper rail A2, busbars for TwinLine cabinet row mounting right and left								
20 x 5	320	1	43 + 95 + 43	1	ZX2324	2CPX042714R9999	ZXM2324	2CPX042750R9999
		2	43 + 345 + 43	1	ZX2325	2CPX042715R9999	ZXM2325	2CPX042751R9999
		3	43 + 595 + 43	1	ZX2326	2CPX042716R9999	ZXM2326	2CPX042752R9999
		4	43 + 845 + 43	1	ZX2327	2CPX042717R9999	ZXM2327	2CPX042753R9999
		5	43 + 1095 + 43	1	ZX2328	2CPX042718R9999	ZXM2328	2CPX042754R9999
		6	43 + 1345 + 43	1	ZX2329	2CPX042719R9999	ZXM2329	2CPX042755R9999
Copper rail C, connector for TwinLine cabinet row mounting right or left								
20 x 5	320	-	208	1	ZX2405	2CPX042787R9999	-	-

Interior expansion system CombiLine N

EDF mounting frame parts

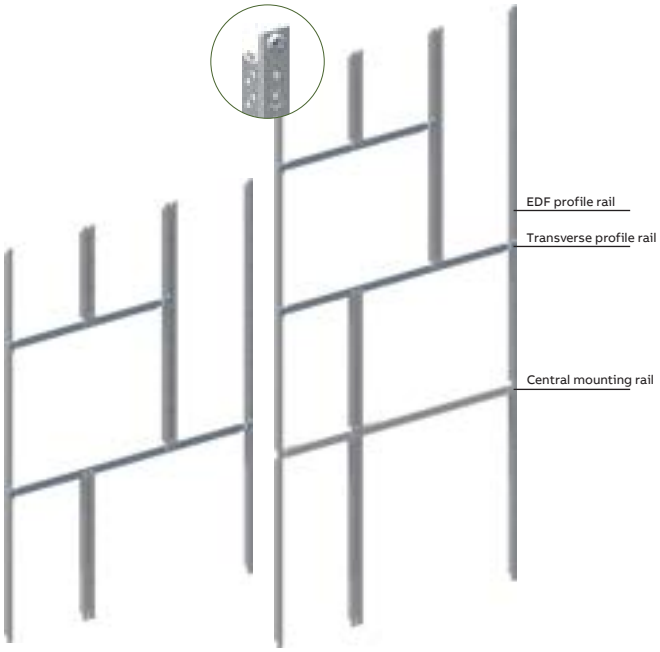

Wall cabinet Standalone cabinet

Setup possibilities with EDF mounting frame parts in the variable setup with transverse profile rails
The vertical EDF profile rails are prepared for receiving modules. The use of a transverse profile rail is necessary to connect different field widths.
The TwinLine wall cabinets are prepared for the setup with the EDF mounting frame parts. In the TwinLine standalone cabinet, it is necessary to use a central mounting rail and EDF adapters (see TwinLine chapter).
For the installation of CombiLine modules in ComfortLine A wall cabinets, additional fastening parts CZ11 have to be ordered.

EDM9

- Vertical EDF profile rail
- Including fastening screws
- To set up the modules up to 400 A

	Height			Kit not installed		Mounted and installed in the cabinet	
Description	**GU**	**mm**	**Unit**	**Type**	**Order code**	**Type**	**Order code**
Vertical EDF profile rail	1	150	1	ED7	2CPX041865R9999	EDM7	2CPX041455R9999
			20	ED7P20	2CPX041866R9999	-	-
	2	300	1	ED8	2CPX039208R9999	EDM8	2CPX041456R9999
			20	ED8P20	2CPX062311R9999	-	-
	3	450	1	ED9	2CPX039209R9999	EDM9	2CPX041457R9999
			20	ED9P20	2CPX062312R9999	-	-
	4	600	1	ED10	2CPX039210R9999	EDM10	2CPX041458R9999
			20	ED10P20	2CPX062313R9999	-	-
	5	750	1	ED11	2CPX039211R9999	EDM11	2CPX041459R9999
			20	ED11P20	2CPX062314R9999	-	-
	6	900	1	ED12	2CPX039212R9999	EDM12	2CPX041460R9999
			20	ED12P20	2CPX062315R9999	-	-
	7	1050	1	ED13	2CPX039213R9999	EDM13	2CPX041461R9999
			20	ED13P20	2CPX062316R9999	-	-
	8	1200	1	ED14	2CPX039214R9999	EDM14	2CPX041462R9999
			20	ED14P20	2CPX062317R9999	-	-
	9	1350	1	ED15	2CPX039215R9999	EDM15	2CPX041463R9999
			20	ED15P20	2CPX062318R9999	-	-
Vertical EDF profile rail For holding touch protection covers during free removal	12	1800	1	ED18	2CPX039216R9999	-	-
			20	ED18P20	2CPX062325R9999	-	-
	14	2100	1	ED20	2CPX039218R9999	-	-

Interior expansion system CombiLine N

EDF mounting frame parts

ED112

- Horizontal transverse profile rails for field distribution upwards **and** downwards
- Including fastening screws

	Width			Kit not installed		Mounted and installed in the cabinet	
Description	**PW**	**mm**	**Unit**	**Type**	**Order code**	**Type**	**Order code**
Transverse profile rail	2	500	1	ED112	2CPX068572R9999	EDM112	2CPX041464R9999
			10	ED112P10	2CPX062736R9999	-	-
	3	750	1	ED113	2CPX068573R9999	EDM113	2CPX041465R9999
			10	ED113P10	2CPX062737R9999	-	-

ED122

- Horizontal transverse profile rails for field distribution upwards **or** downwards
- Including fastening screws

	Width			Kit not installed		Mounted and installed in the cabinet	
Description	**PW**	**mm**	**Unit**	**Type**	**Order code**	**Type**	**Order code**
Transverse profile rail	2	500	1	ED122	2CPX042847R9999	EDM122	2CPX042845R9999
			10	ED122P10	2CPX062738R9999	-	-
	3	750	1	ED123	2CPX042848R9999	EDM123	2CPX042846R9999
			10	ED123P10	2CPX062739R9999	-	-

ED403

- EDF profile rails for stabilizing the DIN rails with each other
- Included in the scope of delivery by default with 3-field width modules

	Height			Kit not installed		Mounted and installed in the cabinet	
Description	**GU**	**mm**	**Unit**	**Type**	**Order code**	**Type**	**Order code**
For rail-mounted device modules with a rail spacing 125 mm	2	152	1	ED402	2CPX042615R9999	-	-
	3	276	1	ED403	2CPX042616R9999	-	-
	4	401	1	ED404	2CPX042617R9999	-	-
	5	527	1	ED405	2CPX042618R9999	-	-
For rail-mounted device modules with a rail spacing 150 mm	2	177	1	ED412	2CPX042619R9999	-	-
	3	327	1	ED413	2CPX042620R9999	-	-
	4	477	1	ED414	2CPX042621R9999	-	-
	5	627	1	ED415	2CPX042622R9999	-	-

Interior expansion system CombiLine N

WR mounting frame parts

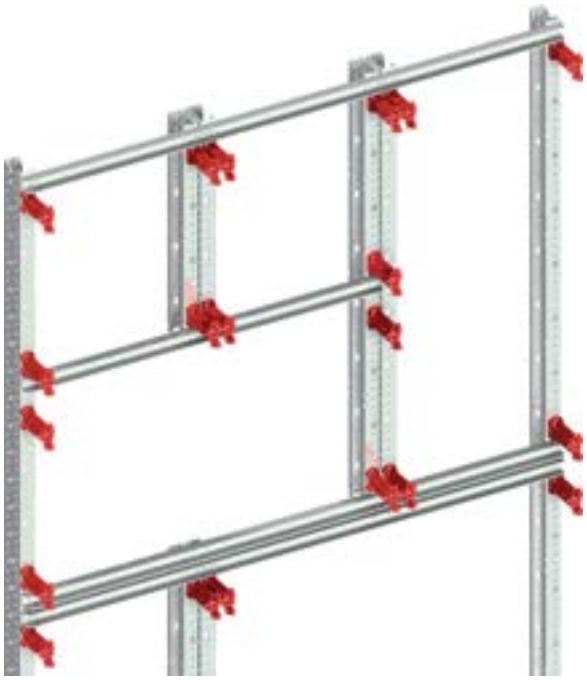

Setup possibilities with WR mounting frame parts in the variable setup with transverse profile rails.
The vertical WR profile rails are prepared for receiving modules. The use of a transverse profile rail is necessary to connect different field widths. The WR mounting frame is used in the TwinLine standalone cabinet. The EDF adapters of the mounting frame holder are removed for assembly in the TwinLine wall cabinet.

- WR mounting frame, complete
- WR profile rail, vertical with transverse profile rail
- To set up the modules up to 850 A

WRM281

	Width			Kit not installed		Mounted and installed in the cabinet	
Description	**PW**	**mm**	**Unit**	**Type**	**Order code**	**Type**	**Order code**
WR mounting frame For all standalone and series switching cabinets from a depth of 225 mm Height 12 GU, 1800 mm	1	250	1	WR181	2CPX042858R9999	WRM181	2CPX042849R9999
	2	500	1	WR281	2CPX042859R9999	WRM281	2CPX042850R9999
	3	750	1	WR381	2CPX042860R9999	WRM381	2CPX042851R9999
	4	1000	1	WR481	2CPX042861R9999	WRM481	2CPX042852R9999
WR mounting frame For series switching cabinets from a depth of 325 mm Height 14 GU, 2100 mm	1	250	1	WR1101	2CPX042862R9999	WRM1101	2CPX042853R9999
	2	500	1	WR2101	2CPX042863R9999	WRM2101	2CPX042854R9999
	3	750	1	WR3101	2CPX042864R9999	WRM3101	2CPX042855R9999
	4	1000	1	WR4101	2CPX042865R9999	WRM4101	2CPX042856R9999

Interior expansion system CombiLine N

WR mounting frame parts

ZW213

- Vertical WR profile rail
- For the height compensation when using transverse profile rails

	Height			Kit not installed		Mounted and installed in the cabinet	
Description	**GU**	**mm**	**Unit**	**Type**	**Order code**	**Type**	**Order code**
Vertical WR profile rail	1	150	1	ZW367	2CPX041850R9999	ZWM367	2CPX041432R9999
	2	300	1	ZW368	2CPX041851R9999	ZWM368	2CPX041433R9999
	3	450	1	ZW369	2CPX041852R9999	ZWM369	2CPX041434R9999
	4	600	1	ZW370	2CPX041853R9999	ZWM370	2CPX041435R9999
	5	750	1	ZW371	2CPX041854R9999	ZWM371	2CPX041436R9999
	6	900	1	ZW372	2CPX041855R9999	ZWM372	2CPX041437R9999
	7	1050	1	ZW373	2CPX041856R9999	ZWM373	2CPX041438R9999
	8	1200	1	ZW374	2CPX041857R9999	ZWM374	2CPX041439R9999
	9	1350	1	ZW375	2CPX041858R9999	ZWM375	2CPX041440R9999
	10	1500	1	ZW376	2CPX041859R9999	ZWM376	2CPX041441R9999
	11	1650	1	ZW377	2CPX041860R9999	ZWM377	2CPX041442R9999
	12	1800	1	ZW213	2CPX060141R9999	ZWM213	2CPX041430R9999
			10	ZW213P10	2CPX062641R9999	-	-
			300	ZW213P300	2CPX062714R9999	-	-
	13	1950	1	ZW378	2CPX041861R9999	ZWM378	2CPX041443R9999
	14	2100	1	ZW214	2CPX060142R9999	ZWM214	2CPX041431R9999
			10	ZW214P10	2CPX062642R9999	-	-

ZW165

- Horizontal transverse profile rails for field distribution
- Including fastening screws
- Two transverse profile rails are required for field distribution upwards and downwards

	Width			Kit not installed		Mounted and installed in the cabinet	
Description	**PW**	**mm**	**Unit**	**Type**	**Order code**	**Type**	**Order code**
Horizontal transverse profile rail	1	250	1	ZW164	2CPX042866R9999	ZWM164	2CPX042857R9999
			10	ZW164P10	2CPX062710R9999	-	-
	2	500	1	ZW165	2CPX041862R9999	ZWM165	2CPX041444R9999
			10	ZW165P10	2CPX062711R9999	-	-
	3	750	1	ZW166	2CPX041863R9999	ZWM166	2CPX041445R9999
			10	ZW166P10	2CPX062712R9999	-	-
	4	1000	1	ZW167	2CPX041864R9999	ZWM167	2CPX041446R9999
			10	ZW167P10	2CPX062713R9999	-	-
	5	1250	1	ZW168	2CPX042950R9999	-	-
	6	1500	1	ZW163	2CPX042951R9999	-	-

ZW209

- As transverse profile rails in the WR mounting frame

Horizontal WR profile rail	1	186	1	ZW209	2CPX039207R9999	-	-
	2	436	1	ZW210	2CPX060138R9999	-	-
	3	686	1	ZW211	2CPX060139R9999	-	-
	4	936	1	ZW212	2CPX060140R9999	-	-

Interior expansion system CombiLine N

Mounting frames / installation sets

WNF3

EDF installation set
Required when installing distrabution board panels, combination sets, meter panels or modules on the EDF mounting frame on the WR mounting frame.

Article	Unit	Type	Order code
1 panel wide	1	WNF1	2CPX045961R9999
2 panel wide	1	WNF2	2CPX045962R9999
3 panel wide	1	WNF3	2CPX045963R9999
4 panel wide	1	WNF4	2CPX045964R9999
5 panel wide = WNF2 + WNF3		-	-

RNF3

EDF installation set
Required when fitting universal cross members and profiles
Required when installing distrabution board panels, combination sets, meter panels or modules on the EDF mounting frame.

1 panel wide	1	RNF1	2CPX045956R9999
2 panel wide	1	RNF2	2CPX045957R9999
3 panel wide	1	RNF3	2CPX045958R9999
4 panel wide	1	RNF4	2CPX045958R9999
5 panel wide	1	RNF5	2CPX045960R9999

ZW61LR

System parts for EDF installation set ENF			
Brachet set for support rails - 1 x left and 1 x right	1	ZW61LR	2CPX062455R9999

ZW50

Support rail, top or bottom			
1 panel wide	1	ZW50	2CPX039459R9999
2 panel wide	1	ZW46	2CPX039446R9999
3 panel wide	1	ZW47	2CPX039447R9999
4 panel wide	1	ZW48	2CPX039448R9999

ZW41

Support rail, centre			
1 panel wide	1	ZW41	2CPX039441R9999
2 panel wide	1	ZW42	2CPX039442R9999
3 panel wide	1	ZW43	2CPX039443R9999
4 panel wide	1	ZW44	2CPX039444R9999

RZ21

System parts for EDF installation set ENF			
Support rail, top or bottom			
1 panel wide	1	RZ21	2CPX045966R9999
2 panel wide	1	RZ22	2CPX045967R9999
3 panel wide	1	RZ23	2CPX045968R9999
4 panel wide	1	RZ24	2CPX045969R9999
5 panel wide	1	RZ25	2CPX045970R9999

Interior expansion system CombiLine N

Plastic partitions

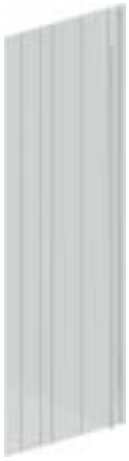

ZX69

Article	Height GU	Height PW	Unit	Type	Order code
Vertical partitions, plastic Not fault arc-proof, separation from adjacent module, distribution panel, meter panel, partition is inserted in adjacent module in the cover bracket, color similar to RAL 7035	3	00	1	ZX69	2CPX039069R9999
	4	0	1	ZX70	2CPX039070R9999
	5	1	1	ZX71	2CPX039071R9999
	6	2	1	ZX72	2CPX039072R9999
	7	3	1	ZX73	2CPX039073R9999
	8	4	1	ZX74	2CPX039074R9999
	9	5	1	ZX75	2CPX039075R9999

ZX86

Article	Width PW	Width mm	Unit	Type	Order code
Horizontal partitions, plastic Not fault arc-proof, separation from adjacent module, distribution panel, meter panel, partition is inserted in adjacent module in the cover bracket, color similar to RAL 7035	1	250	1	ZX86	2CPX039086R9999
	2	500	1	ZX87	2CPX039087R9999



ZX786

Article	Height GU	Width PW	Width mm	Unit	Type	Order code
Vertical partition, plastic Not fault, Arc-Prooof, for separation of 2 X-Cabinets side-by-side conection Existing of 3 Pieces, for X-cabinets only, 400 mm depth	3x4	12	8	1	ZX786	2CPX041869R9999

Interior expansion system CombiLine N

Sheet steel partitions

ZX820

ZX840

Article	Height GU	Height PW	Unit	Type	Order code
For TwinLine-G cabinets					
Vertical partitions, sheet steel Not fault arc-proof, separation from the adjacent module, distribution panel, meter panel, partition is riveted to WR profile / EDF profile; the partition is provided for the attachment position 0*	3	00	1	ZX810	2CPX010675R9999
	4	0	1	ZX811	2CPX010676R9999
	5	1	1	ZX812	2CPX010677R9999
	6	2	1	ZX813	2CPX010678R9999
	7	3	1	ZX814	2CPX010679R9999
	8	4	1	ZX815	2CPX010680R9999
	9	5	1	ZX816	2CPX010681R9999
	12	8	1	ZX817	2CPX010682R9999
For TwinLine-L cabinets					
Vertical partitions, sheet steel Not fault arc-proof, separation from the adjacent module, distribution panel, meter panel, partition is riveted to WR profile / EDF profile; the partition is provided for the attachment position 0*	3	00	1	ZX820	2CPX010683R9999
	4	0	1	ZX821	2CPX010684R9999
	5	1	1	ZX822	2CPX010685R9999
	6	2	1	ZX823	2CPX010686R9999
	7	3	1	ZX824	2CPX010687R9999
	8	4	1	ZX825	2CPX010688R9999
	9	5	1	ZX826	2CPX010689R9999
	12	8	1	ZX827	2CPX010690R9999
For TwinLine-W cabinets					
Vertical partitions, sheet steel Not fault arc-proof, separation from the adjacent module, distribution panel, meter panel, partition is riveted to WR profile / EDF profile; the partition is provided for the attachment position 0*	3	00	1	ZX830	2CPX010691R9999
	4	0	1	ZX831	2CPX010692R9999
	5	1	1	ZX832	2CPX010693R9999
	6	2	1	ZX833	2CPX010694R9999
	7	3	1	ZX834	2CPX010695R9999
	8	4	1	ZX835	2CPX010696R9999
	9	5	1	ZX836	2CPX010697R9999
	12	8	1	ZX837	2CPX010698R9999
For TwinLine-X cabinets					
Vertical partitions, sheet steel Not fault arc-proof, separation from the adjacent module, distribution panel, meter panel, partition is riveted to WR profile / EDF profile; the partition is provided for the attachment position 0*	3	00	1	ZX860	2CPX011001R9999
	4	0	1	ZX861	2CPX011002R9999
	5	1	1	ZX862	2CPX011003R9999
	6	2	1	ZX863	2CPX011004R9999
	7	3	1	ZX864	2CPX011005R9999
	8	4	1	ZX865	2CPX011006R9999
	9	5	1	ZX866	2CPX011007R9999
	12	8	1	ZX867	2CPX011008R9999
For TwinLine-G-, TwinLine-L,- and TwinLine-W cabinets					
Horizontal partitions, sheet steel Not fault arc-proof, separation from the adjacent module, distribution panel, meter panel, partition is screwed to WR profile / EDF profile via additional mounting rail; the partition is provided for the attachment position 0*	1	250	1	ZX840	2CPX010699R9999
	2	500	1	ZX841	2CPX010700R9999
	3	750	1	ZX842	2CPX010701R9999
For TwinLine-X cabinets					
Horizontal partitions, sheet steel Not fault arc-proof, separation from the adjacent module, distribution panel, meter panel, partition is screwed to WR profile / EDF profile via additional mounting rail; the partition is provided for the attachment position 0*	1	250	1	ZX843	2CPX011009R9999
	2	500	1	ZX844	2CPX011010R9999
	3	750	1	ZX845	2CPX011011R9999

Interior expansion system CombiLine N

Partitions made of sheet steel for EDF mounting frame

ZX469

Article	Height GU	Height PW	Unit	Type	Order code
For U-, A- and B cabinets					
Vertical partitions, sheet steel Not fault arc-proof, separation from adjacent module Distribution panel, meter panel Partition wall is riveted to EDF mounting frame	3	00	1	ZX469	2CPX039541R9999
	4	0	1	ZX470	2CPX039542R9999
	5	1	1	ZX471	2CPX039543R9999
	6	2	1	ZX472	2CPX039544R9999
	7	3	1	ZX473	2CPX039545R9999
	8	4	1	ZX474	2CPX039546R9999
	9	5	1	ZX475	2CPX039547R9999
For TwinLine H cabinets					
Vertical partitions, sheet steel Not fault arc-proof, separation from adjacent module Distribution panel to distribution panel Partition wall is riveted to EDF mounting frame	3	00	1	ZX479	2CPX039549R9999
	4	0	1	ZX480	2CPX039550R9999
	5	1	1	ZX481	2CPX039551R9999
	6	2	1	ZX482	2CPX039552R9999
	7	3	1	ZX483	2CPX039553R9999
	8	4	1	ZX484	2CPX039554R9999
	9	5	1	ZX485	2CPX039555R9999

ZX502

Article	Width PW	Width mm	Unit	Type	Order code
For U-, A- and B cabinets					
Horizontal partitions, sheet steel Not fault arc-proof, pushed between the cover brackets when used with EDF mounting frame	1	250	1	ZX502	2CPX039567R9999
	2	500	1	ZX503	2CPX039568R9999
For TwinLine H cabinets					
Horizontal partitions, sheet steel Not fault arc-proof, pushed between the cover brackets when used with EDF mounting frame	1	250	1	ZX497	2CPX039563R9999
	2	500	1	ZX498	2CPX039564R9999

Interior expansion system CombiLine N

Partitions made of sheet steel for WR mounting frame

RZ151

Article	Height GU	Height PW	Depth mm	Unit	Type	Order code
For TriLine® cabinets						
Vertical partitions, sheet steel Not fault arc-proof, WR mounting frame to WR mounting frame Partition wall is riveted to WR mounting frame	12	8	425	1	RZ151	2CPX046561R9999
	14	10	425	1	RZ155	2CPX046565R9999
	12	8	625	1	RZ152	2CPX046562R9999
	14	10	625	1	RZ156	2CPX046566R9999

RZ161

Article	Width PW	Width mm	Depth mm	Unit	Type	Order code
For TriLine® cabinets						
Horizontal partitions, sheet steel Not fault arc-proof, with additional mounting profile for assembly on the WR mounting frame	1	250	425	1	RZ161	2CPX046571R9999
	2	500	425	1	RZ162	2CPX046572R9999
	3	750	425	1	RZ163	2CPX046573R9999
	1	250	625	1	RZ164	2CPX046574R9999
	2	500	625	1	RZ165	2CPX046575R9999
	3	750	625	1	RZ166	2CPX046576R9999

Interior expansion system CombiLine N

General accessories

ZX66P4

ED44P10

ED45P10

ED59P10

ED57P10

ED42P10

ED43P10

ED47

ZA1P5

Article	Unit	Type	Order code
Device carrier connector For connecting EDF and WR mounting frames	4	ZX66P4	2CPX062562R9999
	50	ZX66P50	2CPX068614R9999
Wire holder For wire guidance, installation depth 28.5 mm, to be inserted into the DIN rail from the rear	10	ED44P10	2CPX062335R9999
	50	ED44P50	2CPX062308R9999
	1000	ED44P1000	2CPX062703R9999
Wire holder For the wire guidance or receiving a plastic tube of ∅ 38 mm, installation depth 55 mm, to be inserted in the DIN rail from the rear	10	ED45P10	2CPX062336R9999
	50	ED45P50	2CPX062310R9999
	1000	ED45P1000	2CPX062704R9999
DIN rails adapter For ED44 and ED45, to be snapped onto the DIN rail from the front	10	ED59P10	2CPX062339R9999
Adapter To assemble the wire holders ED44 and ED45 on the perforated mounting plate	10	ED57P10	2CPX061179R9999
Console for the ED44 and ED45 wire holders To be inserted in the DIN rail from the rear	10	ED42P10	2CPX062333R9999
Console for the ED44 and ED45 wire holders To be snapped onto the DIN rail from the front	10	ED43P10	2CPX062334R9999
Cover As a view shutter for wire guidance in the wire holder ED44 and ED45, 1 m long	1	ED47	2CPX039309R9999
Blanking plates For 12 space units, breakable Color RAL 7035	5	ZA1P5	2CPX062384R9999
	50	ZA1P50	2CPX062378R9999
Running meter Color RAL 7035	1	ZA2	2CPX038231R9999
	20	ZA2P20	2CPX062379R9999

Interior expansion system CombiLine N

General accessories

ZA8

Article	Unit	Type	Order code
Marking stripes			
20 mm, self-adhesive, 1-field width	1	ZA8	2CPX060200R9999
	5	ZA8P5	2CPX062598R9999
	40	ZA8P40	2CPX062731R9999
20 mm, self-adhesive, 2-field width	1	ZA9	2CPX060201R9999
	5	ZA9P5	2CPX062599R9999
	50	ZA9P50	2CPX062732R9999
20 mm, self-adhesive, 3-field width	1	ZA7	2CPX060004R9999
	5	ZA7P5	2CPX062597R9999
20 mm, self-adhesive, per running meter	1	ZA10	2CPX038241R9999
	10	ZA10P10	2CPX062706R9999
20 mm, self-adhesive, with additional transparent film, per running meter	1	ZA11	2CPX038230R9999
	10	ZA11P10	2CPX062707R9999
16 mm, self-adhesive, per running meter	1	ZA12	2CPX038242R9999
	10	ZA12P10	2CPX062708R9999
Labeling system for busbars L1, L2, L3, N, PE, 1 sheet = 120 different stickers	1	ZA71	2CPX038458R9999
Labeling system Self-adhesive, for manual or automatic labeling, comprising: 1 sheet with 10 strips	1	ZA27	2CPX038495R9999
Labeling system For distribution panel, up to 6 GU	1	ZA73	2CPX038497R9999
Labeling system For distribution panel, up to 9 GU	1	ZA74	2CPX038498R9999
Labeling system For 8 x 12 PLE	1	ZA78	2CPX031569R9999
Legend for 72 devices PLE	1	ZA79	2CPX031570R9999

ZA71

ZA27

ZA73

ZA74



ZA78

ZA79

Interior expansion system CombiLine N

Connecting terminals for copper rails

ZK79

ZK81

ZK150

ZK178

ZK87

ZK157

ZK154

ZK156

ZK83

ZK891P4

ZK86

ZK302

ZK75

Article	Copper rails Dimensions in mm	Connection cross-section in mm²	Unit	Type	Order code
Connecting terminals for latching onto copper rails With retaining spring	5	1.5 - 16	1	ZK79	2CPX064879R9999
			4	ZK79P4	2CPX062421R9999
			5	ZK79P5	2CPX062631R9999
			50	ZK79P50	2CPX062429R9999
	5	4 - 35	1	ZK81	2CPX064881R9999
			4	ZK81P4	2CPX062422R9999
			5	ZK81P5	2CPX062632R9999
			50	ZK81P50	2CPX062431R9999
	5	2.5 - 50	1	ZK150	2CPX064860R9999
			4	ZK150P4	2CPX062427R9999
			5	ZK150P5	2CPX062633R9999
			50	ZK150P50	2CPX062432R9999
	5	16 - 70	1	ZK178	2CPX064978R9999
			50	ZK178P50	2CPX062622R9999
	5	16 - 120	1	ZK157	2CPX064867R9999
			50	ZK157P50	2CPX062437R9999
	10	1.5 - 16	1	ZK87	2CPX064887R9999
			4	ZK87P4	2CPX062424R9999
			50	ZK87P50	2CPX062430R9999
	10	16 - 70	1	ZK156	2CPX064866R9999
			50	ZK156P50	2CPX062438R9999
	10	16 - 120	1	ZK154	2CPX064864R9999
			50	ZK154P50	2CPX062435R9999
Connecting terminals with insertion part for assembly from the front	12 x 5	16 - 95	1	ZK83	2CPX064883R9999
	12 x 10	16 - 70	4	ZK83P4	2CPX062423R9999
			5	ZK83P5	2CPX062655R9999
			50	ZK83P50	2CPX062433R9999
Frame terminals for sliding onto copper rails	12 x 5 12 x 10	16 - 150 16 - 150	4	ZK891P4	2CPX062626R9999
	12 x 5 12 x 10	35 - 185 35 - 120	1	ZK86	2CPX064886R9999
			20	ZK86P20	2CPX062434R9999
Attachment clamp For fastening on copper rail	5/10	10 - 95	1	ZK302	2CPX062645R9999
			20	ZK302P20	2CPX062648R9999
	5/10	16 - 150	1	ZK303	2CPX062646R9999
			20	ZK303P20	2CPX062649R9999
	5/10	35 - 240	1	ZK304	2CPX062647R9999
			20	ZK304P20	2CPX062650R9999
Busbar connection terminal for connecting with insulating cap		25	1	ZK75	2CPX038220R9999

Interior expansion system parts

DIN rails and DIN rail accessories

ED1

ED51

ED74

ZX21

ZX371

ZK90P2

ZX372P2

ZK103P2

Article	Use for...	Unit	Type	Order code
DIN rail 35 x 15 mm **Wide rail 1: for assembly on the mounting frame** For EDF and WR mounting frame, with hole pattern for wire holders ED44/ED45				
1-field width, length 244 mm	M(B)K...12/M(B)G1... M(B)G41.../ M(B)A160ALA	1	ED1	2CPX039381R9999
		30	ED1P30	2CPX062319R9999
2-field width, length 494 mm	M(B)U270 M(B)G2.../M(B)G42...	1	ED2	2CPX039382R9999
		30	ED2P30	2CPX062320R9999
3-field width, length 744 mm	M(B)U370 M(B)G3.../M(B)G43...	1	ED3	2CPX039383R9999
		30	ED3P30	2CPX062321R9999
4-field width, length 994 mm	_	1	ED4	2CPX039384R9999
		30	ED4P30	2CPX062735R9999
By meter Length 2000 mm	_	1	ED6	2CPX039386R9999
		10	ED6P10	2CPX062705R9999
DIN rail 35 x 15 mm **Wide rail 2: for assembly between the mounting frame**				
1-field width, length 188 mm	M(B)V1.../ M(B)K1... M(B)N1...	1	ED51	2CPX039251R9999
		30	ED51P30	2CPX062322R9999
2-field width, length 438 mm	M(B)V2.../ M(B)K2... M(B)K...13/M(B)C2...HS M(B)N2...	1	ED52	2CPX039252R9999
		30	ED52P30	2CPX062323R9999
3-field width, length 688 mm	M(B)K3... M(B)C3..HS/M(B)N3...	1	ED53	2CPX039253R9999
		30	ED53P30	2CPX062324R9999
4-field width, length 938 mm	-	1	ED54	2CPX039254R9999
DIN rail 35 x 15 mm For terminal block modules, vertical, length 591 mm, module height 600 mm/4GU	M(B)K...14	1	ED74	2CPX042185R9999
DIN rail 35 x 7.5 mm For assembly on the mounting frame				
1-field width, length 244 mm	M(B)K1...K	1	ZX21	2CPX039021R9999
		30	ZX21P30	2CPX062554R9999
2-field width, length 494 mm	M(B)K2...K	1	ZX22	2CPX039022R9999
		30	ZX22P30	2CPX062555R9999
DIN rail 35 x 7.5 mm For assembly between the mounting frame				
1-field width, length 188 mm	M(B)K1...K	1	ZX371	2CPX068076R9999
2-field width, length 438 mm	-	1	ZX389	2CPX068190R9999
Insulator piece For DIN rails 35 x 7.5 and 35 x 15 mm including attachment material	M(B)K...K	2	ZK90P2	2CPX062426R9999
		100	ZK90P100	2CPX068613R9999
Mounting bracket For ZK90P2	M(B)K1...K	2	ZX372P2	2CPX062544R9999
Isolator Piece For DIN rails 35x7,5 and 35x15 mm	M(B)K...K	2	ZK103P2	2CPX068626R9999
		100	ZK103P100	2CPX068627R9999

Interior expansion system parts

Wide rails for EDF or WR mounting frame



ZW223

ZW228

ZW233

ZW248

Article	Unit	Type	Order code
Aluminum profile rail profile no. 1 25 x 14 mm, mounting hole ∅ 6.2 mm			
Wide rail 1: for assembly on the mounting frame			
1-field width, length 244 mm	1	ZW11	2CPX039411R9999
2-field width, length 494 mm	1	ZW12	2CPX039412R9999
3-field width, length 744 mm	1	ZW13	2CPX039413R9999
4-field width, length 994 mm	1	ZW14	2CPX039414R9999
Wide rail 2: for assembly between the mounting frame			
1-field width, length 186 mm	1	ZW223	2CPX060323R9999
2-field width, length 436 mm	1	ZW224	2CPX060324R9999
3-field width, length 686 mm	1	ZW225	2CPX060325R9999
Aluminum profile rail profile no. 2 25 x 20 mm, mounting hole ∅ 6.2 mm			
Wide rail 1: for assembly on the mounting frame			
3-field width, length 744 mm	1	ZW216	2CPX060144R9999
4-field width, length 994 mm	1	ZW217	2CPX060145R9999
Wide rail 2: for assembly between the mounting frame			
1-field width, length 186 mm	1	ZW228	2CPX060328R9999
2-field width, length 436 mm	1	ZW229	2CPX060329R9999
3-field width, length 686 mm	1	ZW230	2CPX060330R9999
4-field width, length 936 mm	1	ZW231	2CPX060331R9999
Aluminum profile rail profile no. 3 32 x 25 mm, mounting hole ∅ 8.2 mm			
Wide rail 1: for assembly on the mounting frame			
1-field width, length 244 mm	1	ZW16	2CPX039416R9999
2-field width, length 494 mm	1	ZW17	2CPX039417R9999
3-field width, length 744 mm	1	ZW18	2CPX039418R9999
4-field width, length 994 mm	1	ZW19	2CPX039419R9999
Wide rail 2: for assembly between the mounting frame			
1-field width, length 186 mm	1	ZW233	2CPX060333R9999
2-field width, length 436 mm	1	ZW234	2CPX060334R9999
3-field width, length 686 mm	1	ZW235	2CPX060335R9999
4-field width, length 936 mm	1	ZW236	2CPX060336R9999
Cable clamp rail profile no. 10 35 x 19 mm, galvanized sheet steel, mounting hole ∅ 6.2 mm			
Wide rail 1: for assembly on the mounting frame			
1-field width, length 244 mm	1	ZW219	2CPX060198R9999
2-field width, length 494 mm	1	ZW220	2CPX060146R9999
3-field width, length 744 mm	1	ZW221	2CPX060147R9999
4-field width, length 994 mm	1	ZW222	2CPX060148R9999
Wide rail 2: for assembly between the mounting frame			
1-field width, length 186 mm	1	ZW248	2CPX060199R9999
2-field width, length 436 mm	1	ZW249	2CPX060349R9999
3-field width, length 686 mm	1	ZW250	2CPX060350R9999
4-field width, length 936 mm	1	ZW251	2CPX060351R9999

> Bolt clamps and saddle clamps for profile no. 10 page 229
> Slide nuts and flat nuts 229

Wide rails representation for EDF or WR mounting frame

Wide rail 1
For assembly on the mounting frame



Wide rail 2
For assembly between the mounting frame

Interior expansion system parts

Profile rails and mounting bracket

ZW395

ZW396

ZX343

ZX334

ZW480

ZW481

ZW482

ZX321LR

ZW389LR

ZX342

ZW64

ZW485P2

ZW490P2

ZW491P2

Article	Use for...	Unit	Type	Order code
Transverse rail 3-field width* Busbar carrier Fixed position	M(B)T350(B) M(B)T351(B) M(B)H350(B) M(B)H351(B) M(B)R302(B)	1	ZW395	2CPX041136R9999
Transverse rail 3-field width* Busbar carrier position can be moved if necessary	M(B)R303 M(B)S324 M(B)S327	1	ZW396	2CPX041137R9999
Assembly bracket For busbar modules S700 and S750 For EDF or WR mounting frame	M(B)H...50	1	ZX343	2CPX064152R9999
For modules for line connection For lowering DIN rails For EDF or WR mounting frame	M(B)V...80 M(B)V...81	1	ZX334	2CPX064166R9999
Deep angle piece For busbar module equipment 100 mm With 3-stage adjustability For EDF or WR mounting frame	M(B)D...52(B)	1	ZW480	2CPX042239R9999
For busbar module equipment 185 mm With 2-stage adjustability For WR mounting frame	M(B)D...21-300(B)	1	ZW481	2CPX042195R9999
Bracket with NH + EFM cover For busbar module equipment 185 mm For WR mounting frame	M(B)D...21-300(B)	2	ZW482	2CPX042196R9999
45° inclined for busbar module For EDF or WR mounting frame	M(B)S...28	1	ZX321LR	2CPX064160R9999
For busbar module 40/60 mm When using ZB5/ZX151 For WR mounting frame	M(B)S...24 M(B)S...27	1	ZW389LR	2CPX062635R9999
For busbar carrier ZX520 For WR mounting frame	-	1	ZX342	2CPX062661R9999
For attaching transverse profiles on the WR frame including attachment material	WR...8	1	ZW64	2CPX039464R9999
	WR...10	40	ZW64P40	2CPX062475R9999
MBB holder set for busbar holders ZX522	M(B)X...	2	ZW485P2	2CPX063200R9999
N holder for N/PE busbar holder ZX563	M(B)X...N	2	ZW490P2	2CPX062798R9999
PE holder	M(B)X...N	2	ZW491P2	2CPX062799R9999

Interior expansion system parts

T Deep angle piece for EDF or WR mounting frame

ZW39P2

ZW59P2

ZW79P2

ZW259P2

ED33P2

ZW60P2

ZW142P2

Article	Use for...	Unit	Type	Order code
Deep angle piece*, adjustment range 42 mm Distance between deep angle piece and cover of 83 - 125 mm*[2] For EDF or WR profile For variable assembly ⏚	M(B)K106 to M(B)K310 M(B)K112 to M(B)K314	2	ZW39P2	2CPX062681R9999
		100	ZW39P100	2CPX062715R9999
Deep angle piece*, adjustment range 71 mm Distance between deep angle piece and cover of 106 - 153 mm*[2] For EDF or WR profile For variable assembly ⏚	M(B)K107 to M(B)K310 M(B)M111 to M(B)M315 M(B)F183 to M(B)F383	2	ZW59P2	2CPX062660R9999
		100	ZW59P100	2CPX062716R9999
Deep angle piece*, adjustment range 107 mm Distance between deep angle piece and cover of 142 - 190 mm*[2] For EDF or WR profile For variable assembly ⏚	M(B)F184 to M(B)F384	2	ZW79P2	2CPX062688R9999
		100	ZW79P100	2CPX062717R9999
Deep angle piece*, adjustment range 64 mm Distance between deep angle piece and cover of 99 - 147 mm*[2] for interconnecting copper rails For EDF or WR profile For variable assembly ⏚	M(B)T250 to M(B)T351	2	ZW259P2	2CPX062679R9999
Deep angle piece, adjustment range 62 mm Distance between deep angle piece and cover of 77 - 139 mm*[2] For EDF profile For variable assembly ⏚	Distributor panels with mounting plate	2	ED33P2	2CPX062305R9999
		100	ED33P100	2CPX062307R9999
Deep angle piece, adjustment range 60 mm Distance between deep angle piece and cover of 119 - 179 mm*[2] For WR profile For assembly in the 15 mm grid ⏚	Free expansion	2	ZW60P2	2CPX062454R9999
		100	ZW60P100	2CPX062476R9999
Deep angle piece, adjustment range 88 mm Distance between deep angle piece and cover of 128 - 216 mm*[2] For WR profile For variable assembly ⏚	M(B)L100 to M(B)L300 M(B)S131 to M(B)S331	2	ZW142P2	2CPX062463R9999
		40	ZW142P40	2CPX062477R9999

*[2] When using cover bracket ED138 with a height of 52.5 mm

Interior expansion system parts

Mounting cross-beams busbar modules / universal application

	Article	Use for...	Unit	Type	Order code
	Mounting cross-bars for busbar modules				
ZW253	For busbar modules Equipment 40 mm	M(B)T350/M(B)T351	1	ZW253	2CPX062680R9999
ZW252	For busbar module 40/60 mm For busbar carrier ZX151 for additional support	M(B)S327 M(B)S324/M(B)H350	1	ZW252	2CPX062664R9999
ZW255	For busbar module equipment 60 mm For busbar carrier ZX146 for additional support	M(B)R302(B)	1	ZW255	2CPX064151R9999
ZW256	For busbar module equipment 60 mm For busbar carrier ZX146 for additional support	M(B)R303(B)	1	ZW256	2CPX062678R9999
ZW399	For busbar module equipment 60 mm For busbar carrier ZX146 For EDF or WR mounting frame	M(B)R...H	1	ZW399	2CPX062972R9999
ZW384	For busbar module 40/60 mm For busbar carrier ZX151 For EDF mounting frame	M(B)S...24 M(B)S...27	1	ZW384	2CPX062748R9999
ZW403LR	For busbar module equipment 60 mm For busbar carrier ZX146, deep-installed For WR mounting frame	M(B)R...03	1	ZW403LR	2CPX062974R9999
	Mounting cross-bars for busbar carrier ZX518				
ZX322	45° inclined for busbar module 1-field width	M(B)S128	1	ZX322	2CPX064159R9999
ZX333	45° inclined for busbar module 2-field width	M(B)S228	1	ZX333	2CPX064163R9999
ZW386	For N/PE busbar module Indented for busbar carrier	M(B)N...69	1	ZW386	2CPX062749R9999
ZW390P2	For N/PE busbar module For additional support	M(B)N274, M(B)N275 M(B)N374, M(B)N375	2	ZW390P2	2CPX062486R9999
	Mounting cross-beam for terminal blocks module				
ZW322	195 mm	M(B)K112-114	1	ZW322	2CPX068541R9999
	435 mm	M(B)K212-214	1	ZW323	2CPX068542R9999
	685 mm	M(B)K312-314	1	ZW324	2CPX068543R9999

Interior expansion system parts

Mounting cross-bars for power switch and load break switch



ED160



ED171

ED166

ED167

ED162

ED163

ED168

ED155

ED173

Article	Use for...	Unit	Type	Order code
Mounting cross-beams for power switches Make: ABB, series: Tmax XT Including M4 sliding nuts				
1-field width, Tmax XT1, XT3 useful width of 199 mm	MA100ALXB - MA250ALXB M(B)A190T	1	ED160	2CPX068773R9999
2-field width, Tmax XT1, XT3 useful width of 449 mm	M(B)A290T	1	ED260	2CPX062977R9999
3-field width, Tmax XT1, XT3 useful width of 699 mm	M(B)A390T	1	ED360	2CPX062978R9999
1-field width, Tmax XT2 useful width of 199 mm	M(B)A191T	1	ED170	2CPX068388R9999
2-field width, Tmax XT2 useful width of 449 mm	M(B)A291T	1	ED270	2CPX068390R9999
3-field width, Tmax XT2 useful width of 699 mm	M(B)A391T	1	ED370	2CPX068391R9999
1-field width, Tmax XT4 useful width of 199 mm	M(B)A193T	1	ED171	2CPX068389R9999
1-field width Tmax T4, 3-pole Tmax T5 (400), 3-pole	M(B)A192T	1	ED166	2CPX064155R9999
2-field width Tmax T4, 4-pole, Tmax T5, 3- and 4-pole	M(B)A292T	1	ED167	2CPX064156R9999
Mounting cross-beam for load break switch 1-field width For OT200E03P and OT250E03P	MA200ALAB - MA250ALAB MA250ALA	1	ED162	2CPX068807R9999
2-field width For OT400E03P and OT630E03P	MA400ALAB - MA630ALAB MA630ALA	1	ED163	2CPX068808R9999
1-field width For OS160GD03PN3P and OS250GD03PN3P	MBA250ALO MBW250A	1	ED168	2CPX039312R9999
Universal mounting cross-beams with fastening screws and cage nuts M4, M5, M6, M8 (2 cross-beams are required per switch) Useful width/depth				
For switch 250 A, 1-field width Cage nut each 2 x M4, M5, M6 170 mm / 135 mm	M(B)A250A	1	ED155	2CPX067963R9999
For switch 630 A, 2-field width Cage nut each 2 x M5, M6 420 mm / 153 mm	M(B)A630A MA400ALSB - MA630ALSB	1	ED158	2CPX067969R9999
For switch 800 A, 2-field width Cage nut each 2 x M5, M6, M8 420 mm/161 mm	M(B)A800A	1	ED173	2CPX067998R9999

Interior expansion system parts

Mounting cross-bars for power switch and fuse switch disconnector

Article		Use for...	Unit	Type	Order code
ED450	**2-field width** For XT5	MX208LX	1	ED450	2CPX063194R9999
ED451	**2-field width** For XT6	MX210LX	1	ED451	2CPX063195R9999
ED452	**2-field width** For XT7	MX211LX	1	ED452	2CPX063196R9999
ED453	**2-field width** For OT630-800	MX208LA	1	ED453	2CPX063197R9999
ED454	**3-field width** For OT1000-1250	MX310LA	1	ED454	2CPX063198R9999
ED455	**3-field width** For ATS500-800	MX308A	1	ED455	2CPX063199R9999

Interior expansion system parts

Mounting cross-beam for disconnector mounting

ZX31

ZX34

ZW162

ZH235

ZH238

ZW159

ZW160

ZH418

ZX35

ZX297P10

Article	Use for...	Unit	Type	Order code
Mounting cross-beam for disconnector mounting With fastening screws and cage nuts for:				
1/2 disconnector NH00 1-field width	M(B)T135(B) M(B)T136(B) M(B)T137(B)	1	ZX31	2CPX039031R9999
		10	ZX31P10	2CPX062480R9999
4 disconnector NH00 2-field width	M(B)T236(B) M(B)T237(B)	1	ZX34	2CPX039034R9999
		10	ZX34P10	2CPX062481R9999
6 disconnector NH00 3-field width	M(B)T336(B) M(B)T337(B)	1	ZW162	2CPX039458R9999
1 disconnector NH1 1-field width	M(B)T142(B) M(B)T143(B)	1	ZH235	2CPX039841R9999
1 disconnector NH2 1-field width	M(B)T144(B) M(B)T145(B)	1	ZH238	2CPX039837R9999
2 disconnectors NH1 or NH2 2-field width	M(B)T242(B) M(B)T243(B) M(B)T244(B) M(B)T245(B)	1	ZW159	2CPX039455R9999
3 disconnectors NH1 or NH2 3-field width	M(B)T345(B) M(B)T343(B) M(B)T344(B) M(B)T345(B)	1	ZW160	2CPX039456R9999
Mounting cross-beam for disconnector mounting For NH00 disconnector for setup on a DIN rail	-	1	ZH418	2CPX062968R9999
Mounting cross-beam for installation without holes Without fastening screws and cage nuts				
Field width 1	1MK..A	1	ZX35	2CPX060638R9999
Field width 2	2MK..A	1	ZX39	2CPX060213R9999
Cage nuts For disconnector cross-beams and telecom technology				
M4	ED160 - ED360 ED170 - ED370 ED171/ZX35	10	ZX299P10	2CPX060639R9999
M6	ZX31/ZX34/ZW162	10	ZX297P10	2CPX062541R9999
M8	ZH235/ZH238 ZW159/ZW160	10	ZX298P10	2CPX062542R9999

Interior expansion system parts

Assembly plates for depressed and fitted assembly

ZW365

Article	Use for...	Unit	Type	Order code
Mounting plates for assembly between the mounting frame For depressed assembly with deep angle piece Deep angle pieces are to be ordered separately H x W				
1-field width				
1 GU, 116 x 188 mm	M(B)M111	1	ZW365	2CPX068073R9999
2 GU, 266 x 188 mm	M(B)M112	1	ZW338	2CPX067938R9999
3 GU, 416 x 188 mm	M(B)M113	1	ZW341	2CPX067941R9999
4 GU, 566 x 188 mm	M(B)M114	1	ZW344	2CPX067944R9999
5 GU, 716 x 188 mm	M(B)M115	1	ZW362	2CPX068070R9999
2-field width				
1 GU, 116 x 438 mm	M(B)M211	1	ZW336	2CPX067936R9999
2 GU, 266 x 438 mm	M(B)M212	1	ZW339	2CPX067939R9999
3 GU ,416 x 438 mm	M(B)M213	1	ZW342	2CPX067942R9999
4 GU, 566 x 438 mm	M(B)M214	1	ZW345	2CPX067945R9999
5 GU, 716 x 438 mm	M(B)M215	1	ZW363	2CPX068071R9999
3-field width				
1 GU, 116 x 688 mm	M(B)M311	1	ZW337	2CPX067937R9999
2 GU, 266 x 688 mm	M(B)M312	1	ZW340	2CPX067940R9999
3 GU, 416 x 688 mm	M(B)M313	1	ZW343	2CPX067943R9999
4 GU, 566 x 688 mm	M(B)M314	1	ZW346	2CPX067946R9999
5 GU, 716 x 688 mm	M(B)M315	1	ZW364	2CPX068072R9999

ZX605

Article	Use for...	Unit	Type	Order code
Mounting plates **For assembly on the mounting frame** For fitted assembly in the small distributor without deep angle piece				
1-field width 2 GU, 266 x 200 mm	M(B)M112K	1	ZX605	2CPX067776R9999
1-field width 3 GU, 416 x 200 mm	M(B)M113K	1	ZX606	2CPX067777R9999
1-field width 4 GU, 566 x 200 mm	M(B)M114K	1	ZX607	2CPX064154R9999

ZX382

ZX381



ZX379

ZX380

ZX390

ZX24

Article	Use for...	Unit	Type	Order code
Mounting frame for measuring devices 96 x 96 mm				
1-field width	M(B)U156	1	ZX382	2CPX068186R9999
	M(B)U157 M(B)U158	1	ZX381	2CPX068086R9999
2-field width	M(B)U257	1	ZX379	2CPX068084R9999
3-field width	M(B)U357	1	ZX380	2CPX068085R9999
Mounting frame for NH load break switches Make ABB SlimLine				
2-field width	M(B)L25	1	ZX390	2CPX068560R9999
3-field width	M(B)L35	1	ZX391	2CPX068561R9999
Line protective hose				
Installation kit M 20	M(B)V180	1	ZX24	2CPX068538R9999
Installation kit M 32	M(B)V181, M(B)V281	1	ZX25	2CPX068539R9999
Installation kit M 40	M(B)V182, M(B)V282	1	ZX26	2CPX068540R9999

Interior expansion system parts

Mounting frame/meter support plates/switch cabinet lighting

ZX304

ZX305

ZX574

ZX378P20

Article	Use for...	Unit	Type	Order code
Meter support plates for WR profile				
1-field width, height 450 mm, For a meter, without head part	M(B)Z160	1	ZX304	2CPX060294R9999
1-field width, height 750 mm, For two meters, without head part	M(B)Z161	1	ZX305	2CPX060295R9999
Head part for meter support plates Including mounting material 1-field width	M(B)Z160 M(B)Z161	1	ZX574	2CPX068781R9999
Spacer piece for meter support plates	M(B)Z160 M(B)Z161	20	ZX378P20	2CPX062547R9999

ZX314

ZX315

ZX316

ZX317

ZX318

ZX310

ZX311

Article support for....	Use for...	Unit	Type	Order code
1 field width, for meter (without headpiece) meteringplate 300 mm	M(B)Z170	1	ZX314	2CPX070763R9999
1 field width, for meter (without headpiece) meteringplate 450 mm	M(B)Z171	1	ZX315	2CPX070764R9999
1 field width, for meter (without headpiece) meteringplate 750 mm	M(B)Z172	1	ZX316	2CPX070765R9999
1 field width, for meter (without headpiece) meteringplate 450 mm	M(B)Z173	1	ZX317	2CPX070766R9999
1 field width, for meter (without headpiece) meteringplate 450 mm	M(B)Z174	1	ZX318	2CPX070767R9999
headpiece for EDF		1	ZX310	2CPX070768R9999
headpiece for WR	M(B)Z170-174	1	ZX311	2CPX070769R9999

Interior expansion system parts

Yard goods busbars

ZX400

ZX406

ZX403

ZX365

ZX409

ZX362

ZX412

ZX415

Article	Unit	Type	Order code
Rated current (I_n) 250 A Copper rail 12 x 5 mm			
1 m	1	ZX400	2CPX061400R9999
2 m	1	ZX401	2CPX061401R9999
3 m	1	ZX402	2CPX061402R9999
4 m	1	ZX350	2CPX061350R9999
Rated current (I_n) 320 A Copper rail 20 x 5 mm			
1 m	1	ZX406	2CPX061406R9999
2 m	1	ZX407	2CPX061407R9999
3 m	1	ZX408	2CPX061408R9999
4 m	1	ZX351	2CPX061351R9999
Rated current (I_n) 360 A Copper rail 12 x 10 mm			
1 m	1	ZX403	2CPX061403R9999
2 m	1	ZX404	2CPX061404R9999
3 m	1	ZX405	2CPX061405R9999
4 m	1	ZX354	2CPX061354R9999
Rated current (I_n) 390 A Copper rails 25 x 5 mm			
1 m	1	ZX365	2CPX061365R9999
2 m	1	ZX366	2CPX061366R9999
3 m	1	ZX367	2CPX061367R9999
4 m	1	ZX352	2CPX061352R9999
Rated current (I_n) 440 A Copper rails 30 x 5 mm			
1 m	1	ZX409	2CPX061409R9999
2 m	1	ZX410	2CPX061410R9999
3 m	1	ZX411	2CPX061411R9999
4 m	1	ZX353	2CPX061353R9999
Rated current (I_n) 500 A Copper rails 20 x 10 mm			
1 m	1	ZX362	2CPX061362R9999
2 m	1	ZX363	2CPX061363R9999
3 m	1	ZX364	2CPX061364R9999
4 m	1	ZX355	2CPX061355R9999
Rated current (I_n) 630 A Copper rails 30 x 10 mm			
1 m	1	ZX412	2CPX061412R9999
2 m	1	ZX413	2CPX061413R9999
3 m	1	ZX414	2CPX061414R9999
4 m	1	ZX356	2CPX061356R9999
Rated current (I_n) 850 A Copper rails 40 x 10 mm			
1 m	1	ZX415	2CPX061415R9999
2 m	1	ZX416	2CPX061416R9999
3 m	1	ZX417	2CPX061417R9999
4 m	1	ZX357	2CPX061357R9999

Interior expansion system parts

Busbar brackets and accessories

ZB5

ZX147

ZX146

ZX172

ZX157

ZX151

ZX158

ZX520

ZX523

ZX563

Article	Use for...	Unit	Type	Order code
Busbar bracket 5-pole Busbar center distance 40 mm For copper rails 12 x 5 mm, 12 x 10 mm and 20 x 5 mm	M(B)H...50 M(B)S...24	1	ZB5	2CPX038459R9999
		10	ZB5P10	2CPX062556R9999
Busbar bracket 1-pole Busbar center distance 60 mm For copper rails 12 x 5 mm to 30 x 10 mm For adding in a row on ZX146	-	1	ZX147	2CPX044011R9999
		10	ZX147P10	2CPX062719R9999
Busbar bracket 3-pole Busbar center distance 60 mm For copper rails 12 x 5 mm to 30 x 10 mm	M(B)R...02(B) M(B)R...H M(B)R...03	1	ZX146	2CPX044010R9999
		10	ZX146P10	2CPX062718R9999
End cover For busbar carrier ZX146/ZB5	M(B)H...50 M(B)R...02(B) M(B)S...24	1	ZX172	2CPX060232R9999
		10	ZX172P10	2CPX062724R9999
N/PE busbar carrier For copper rails 12 x 5 mm to 30 x 5 mm And 12 x 10 mm to 20 x 10 mm For adding in a row on ZX151	-	1	ZX157	2CPX044009R9999
		10	ZX157P10	2CPX062722R9999
Busbar bracket 3-pole Busbar center distance 60 mm For copper rails 12 x 5 mm to 30 x 10 mm	M(B)S...27	1	ZX151	2CPX044006R9999
		10	ZX151P10	2CPX062721R9999
End cover For busbar carrier ZX151	2CPX068735R9999	1	ZX158	2CPX060208R9999
		10	ZX158P10	2CPX062723R9999
Busbar bracket 3-pole				
Busbar center distance 60 mm/100 mm For copper rails 30 x 10 mm to 60 x 10 mm	M(B)L...52(B) M(B)S...31	1	ZX520	2CPX067861R9999
		10	ZX520P10	2CPX062552R9999
Busbar center distance 100 mm/ 185 mm For copper rails 30 x 10 mm to 100 x 10 mm	M(B)L...00(B) ML...B	1	ZX522	2CPX067909R9999
		10	ZX522P10	2CPX062553R9999
Busbar bracket 3-/4-pole Busbar center distance 185 mm For copper rails 40 x 10 mm	M(B)L25 M(B)L35	1	ZX523	2CPX068553R9999
N/PE busbar carrier For copper rails30 x 10 mm up to 50 x 10 mm	-	1	ZX563	2CPX068735R9999
		10	ZX563P10	2CPX068736R9999

Interior expansion system parts

Busbar brackets and accessories

ZX518

ZX519

ZX149

ZB19

ZX50

Article	Use for...	Unit	Type	Order code
N/PE busbar carrier For copper rails 12 x 5 mm, 20 x 5 mm and 30 x 5 mm	M(B)N...69 M(B)N...74 M(B)N...75 M(B)S...28	1	ZX518	2CPX067805R9999
		10	ZX518P10	2CPX062551R9999
End cover For busbar carrier ZX518	M(B)N...74 M(B)N...75	1	ZX519	2CPX062687R9999
		10	ZX519P10	2CPX062686R9999
N/PE busbar carrier For copper rails 12 x 5 mm to 30 x 10 mm	M(B)N...62 M(B)N...63	1	ZX149	2CPX044019R9999
		10	ZX149P10	2CPX062720R9999
Cover profile for latching For copper rails 12 x 5 mm and 12 x 10 mm Length 1 m	-	1	ZB19	2CPX038187R9999
	-	10	ZB19P10	2CPX062709R9999
Support insulators with wrench flat Diameter x length				
30 x 30 mm, thread on both sides: M6 Wrench size: 30 mm	-	1	ZX50	2CPX039050R9999
		20	ZX50P20	2CPX062725R9999
30 x 30 mm, thread on both sides: M8 Wrench size: 30 mm	-	1	ZX51	2CPX039051R9999
		20	ZX51P20	2CPX062726R9999
40 x 40 mm, thread on both sides: M10 Wrench size: 40 mm	-	1	ZX52	2CPX039052R9999
		20	ZX52P20	2CPX062560R9999
50 x 60 mm, thread on both sides: M12 Wrench size: 50 mm	-	1	ZX53	2CPX039053R9999
		20	ZX53P20	2CPX062559R9999
40 x 50 mm, thread on one side: M12 Threaded bolts on one side: M12 x 65 mm	-	1	ZX54	2CPX039054R9999
		20	ZX54P20	2CPX062727R9999

ZX36

Cu spacer Diameter x length				
20 x 11 mm, inside diameter 8.5 mm Cross section: 257 mm²	-	1	ZX36	2CPX060210R9999
		10	ZX36P10	2CPX062131R9999
20 x 22 mm, inside diameter 8.5 mm Cross section: 257 mm²	-	1	ZX37	2CPX060211R9999
		10	ZX37P10	2CPX062132R9999
20 x 33 mm, inside diameter 8.5 mm Cross section: 257 mm²	-	1	ZX38	2CPX060212R9999
		10	ZX38P10	2CPX062133R9999
30 x 11 mm, inside diameter 10.5 mm Cross section: 620 mm²	-	1	ZX39	2CPX060213R9999
		10	ZX39P10	2CPX062134R9999
30 x 22 mm, inside diameter 10.5 mm Cross section: 620 mm²	-	1	ZX40	2CPX060214R9999
		10	ZX40P10	2CPX062135R9999
30 x 33 mm, inside diameter 10.5 mm Cross section: 620 mm²	-	1	ZX41	2CPX060215R9999
		10	ZX41P10	2CPX062136R9999
40 x 11 mm, inside diameter 10.5 mm Cross section: 1170 mm²	-	1	ZX42	2CPX060216R9999
		10	ZX42P10	2CPX062137R9999
40 x 22 mm, inside diameter 10.5 mm Cross section: 1170 mm²	-	1	ZX43	2CPX060217R9999
		10	ZX43P10	2CPX062138R9999
40 x 33 mm, inside diameter 10.5 mm Cross section: 1170 mm²	-	1	ZX44	2CPX060218R9999
		10	ZX44P10	2CPX062139R9999

Interior expansion system parts

Attachment material

ZW62

ZX256P10

ZX230P10

ZB70

ZW99

Article	Unit	Type	Order code
Inlay nuts for WR profile M 8	1	ZW62	2CPX039462R9999
	50	ZW62P50	2CPX062479R9999
Inlay nut for profile rails, profile no. 1 and 2 L x W x D in mm			
20 x 11 x 4, M5	10	ZX256P10	2CPX062515R9999
20 x 14 x 4, M5	10	ZX248P10	2CPX062509R9999
20 x 14 x 4, M6	10	ZX249P10	2CPX062510R9999
20 x 14 x 4, M8	10	ZX250P10	2CPX062511R9999
Slide nut for profile rails, profile no. 1 and 2 L x W x D in mm			
20 x 20 x 4, M3	10	ZX226P10	2CPX062494R9999
20 x 20 x 4, M4	10	ZX227P10	2CPX062495R9999
20 x 20 x 4, M5	10	ZX228P10	2CPX062496R9999
20 x 20 x 4, M6	10	ZX229P10	2CPX062497R9999
20 x 20 x 4, M8	10	ZX230P10	2CPX062498R9999
Slide nut for profile rails, for profile no. 3 L x W x D in mm			
25 x 25 x 8, M5	10	ZX235P10	2CPX062639R9999
25 x 25 x 6, M6	10	ZX231P10	2CPX062499R9999
25 x 25 x 8, M8	10	ZX232P10	2CPX062500R9999
25 x 25 x 8, M10	10	ZX233P10	2CPX062501R9999
25 x 25 x 8, M12	10	ZX234P10	2CPX062502R9999
Plastic spacer pieces For high or low installation of fastening parts			
Yard goods, length 1 m	1	ZB70	2CPX038570R9999
Vibration damper For vibration-free installation of mounting plates and devices			
M6 external thread and M 6 internal thread	1	ZW98	2CPX060124R9999
M10 internal thread	1	ZW99	2CPX060125R9999

Interior expansion system parts

Attachment material

ZB21P4

ZB36P20

ZB37P20

ZB22P20

ZB32P4

ZB27P20

ZX273P4

ZX910P10

ZX260P10

ZX263P10

ZX258P10

ZX270P10

ZX283P10

Article	Unit	Type	Order code
Lens screw with cross-slot Pozidriv PZ2, M5 x 8 mm	4	ZB21P4	2CPX062663R9999
	20	ZB21P20	2CPX068585R9999
Lens screw with cross-slot and slot Pozidriv PZ2, M5 x 12 mm	20	ZB36P20	2CPX062390R9999
Lens screw with hexalobular socket and slit M5 x 12 mm/Torx T25	20	ZB37P20	2CPX060202R9999
Cylinder head screw with slit M5 x 20 mm	20	ZB22P20	2CPX068586R9999
Lens-tapping screw with hexalobular socket and slit Torx T25			
M4.8 x 9.5 mm	4	ZB32P4	2CPX064149R9999
	20	ZB32P20	2CPX062651R9999
	500	ZB32P500	2CPX062652R9999
M4.8 x 11.5 mm	20	ZB27P20	2CPX062588R9999
	500	ZB27P500	2CPX062689R9999
M4.8 x 32 mm	4	ZX273P4	2CPX064153R9999
Flat head screws with hexalobular socket			
M6 x 20 mm/Torx T30	10	ZX910P10	2CPX060203R9999
M6 x 30 mm/Torx T30	10	ZX912P10	2CPX060204R9999
M6 x 45 mm/Torx T30	10	ZX915P10	2CPX060205R9999
Cylinder head screw with hexalobular socket			
M5 x 10 mm	10	ZX260P10	2CPX062517R9999
M6 x 20 mm	10	ZX261P10	2CPX062518R9999
M6 x 30 mm	20	ZX257P20	2CPX068588R9999
M6 x 45 mm	20	ZX259P20	2CPX068589R9999
Cylinder head screw with hexalobular socket			
M8 x 16 mm	10	ZX263P10	2CPX062520R9999
M8 x 20 mm	10	ZX264P10	2CPX062521R9999
M8 x 30 mm	10	ZX265P10	2CPX062522R9999
Cylinder head screw with hexalobular socket and captive spring washer M6 x 12 mm	10	ZX258P10	2CPX062516R9999
Cylinder head screw with hexalobular socket, thread-forming For hole diameter 5.5 mm M6 x 20	10	ZX270P10	2CPX062527R9999
Washer 6 mm	10	ZX283P10	2CPX060281R9999

Interior expansion system parts

Covers for rail-mounted devices, row spacing 125 mm

AS11

AS12

AS13

AS14

AS15

AS21

AS22

AS23

Article	Unit	Type	Order code
Cover 1-field width, with 90° press-and-turn lock			
Height x width			
150 x 250 mm without slit	1	AG11	2CPX062801R9999
150 x 250 mm with slit	1	AS11	2CPX062802R9999
300 x 250 mm without slit	1	AG12	2CPX062803R9999
300 x 250 mm with slit	1	AS12	2CPX062804R9999
450 x 250 mm without slit	1	AG13	2CPX062805R9999
450 x 250 mm with slit	1	AS13	2CPX062806R9999
600 x 250 mm without slit	1	AG14	2CPX062807R9999
600 x 250 mm with slit	1	AS14	2CPX062808R9999
750 x 250 mm without slit	1	AG15	2CPX062809R9999
750 x 250 mm with slit	1	AS15	2CPX062810R9999
Cover 2-field width, with 90° press-and-turn lock			
Height x width			
150 x 500 mm without slit	1	AG21	2CPX062811R9999
150 x 500 mm with slit	1	AS21	2CPX062812R9999
300 x 500 mm without slit	1	AG22	2CPX062813R9999
300 x 500 mm with slit	1	AS22	2CPX062814R9999
450 x 500 mm without slit	1	AG23	2CPX062815R9999
450 x 500 mm with slit	1	AS23	2CPX062816R9999

Interior expansion system parts

Covers for rail-mounted devices, row spacing 125 mm

AS24

AS25

AS31

AS32

AS33

AS34

AS35

Article	Unit	Type	Order code
Cover 2-field width, with 90° press-and-turn lock			
Height x width			
600 x 500 mm without slit	1	AG24	2CPX062817R9999
600 x 500 mm with slit	1	AS24	2CPX062818R9999
750 x 500 mm without slit	1	AG25	2CPX062819R9999
750 x 500 mm with slit	1	AS25	2CPX062820R9999
Cover 3-field width, with 90° press-and-turn lock			
Height x width			
150 x 750 mm without slit	1	AG31	2CPX062821R9999
150 x 750 mm with slit	1	AS31	2CPX062822R9999
300 x 750 mm without slit	1	AG32	2CPX062823R9999
300 x 750 mm with slit	1	AS32	2CPX062824R9999
450 x 750 mm without slit	1	AG33	2CPX062825R9999
450 x 750 mm with slit	1	AS33	2CPX062826R9999
600 x 750 mm without slit	1	AG34	2CPX062827R9999
600 x 750 mm with slit	1	AS34	2CPX062828R9999
750 x 750 mm without slit	1	AG35	2CPX062829R9999
750 x 750 mm with slit	1	AS35	2CPX062830R9999

Interior expansion system parts

Covers for rail-mounted devices, row spacing 150 mm

AH1

AS11

AS212

AS213

AS214

AS215

AH2

AS21

AS222

AS223

Article	Unit	Type	Order code
Cover 1-field width, with 90° press-and-turn lock			
Height x width			
75 x 250 mm without slit	1	AH1	2CPX070387R9999
150 x 250 mm without slit	1	AG11	2CPX062801R9999
150 x 250 mm with slit	1	AS11	2CPX062802R9999
300 x 250 mm without slit	1	AG212	2CPX062831R9999
300 x 250 mm with slit	1	AS212	2CPX062832R9999
450 x 250 mm without slit	1	AG213	2CPX062833R9999
450 x 250 mm with slit	1	AS213	2CPX062834R9999
600 x 250 mm without slit	1	AG214	2CPX062835R9999
600 x 250 mm with slit	1	AS214	2CPX062836R9999
750 x 250 mm without slit	1	AG215	2CPX062837R9999
750 x 250 mm with slit	1	AS215	2CPX062838R9999
Cover 2-field width, with 90° press-and-turn lock			
Height x width			
75 x 500 mm without slit	1	AH2	2CPX070388R9999
150 x 500 mm without slit	1	AG21	2CPX062811R9999
150 x 500 mm with slit	1	AS21	2CPX062812R9999
300 x 500 mm without slit	1	AG222	2CPX062839R9999
300 x 500 mm with slit	1	AS222	2CPX062840R9999
450 x 500 mm without slit	1	AG223	2CPX062841R9999
450 x 500 mm with slit	1	AS223	2CPX062842R9999

Interior expansion system parts

Covers for rail-mounted devices, row spacing 150 mm

AS224

AS225

AS31

AS232

AS233

AS234

AS235

Article	Unit	Type	Order code
Cover 2-field width, with 90° press-and-turn lock			
Height x width			
600 x 500 mm without slit	1	AG224	2CPX062843R9999
600 x 500 mm with slit	1	AS224	2CPX062844R9999
750 x 500 mm without slit	1	AG225	2CPX062845R9999
750 x 500 mm with slit	1	AS225	2CPX062846R9999
Cover 3-field width, with 90° press-and-turn lock			
Height x width			
150 x 750 mm without slit	1	AG31	2CPX062821R9999
150 x 750 mm with slit	1	AS31	2CPX062822R9999
300 x 750 mm without slit	1	AG232	2CPX062847R9999
300 x 750 mm with slit	1	AS232	2CPX062848R9999
450 x 750 mm without slit	1	AG233	2CPX062849R9999
450 x 750 mm with slit	1	AS233	2CPX062850R9999
600 x 750 mm without slit	1	AG234	2CPX062851R9999
600 x 750 mm with slit	1	AS234	2CPX062852R9999
750 x 750 mm without slit	1	AG235	2CPX062853R9999
750 x 750 mm with slit	1	AS235	2CPX062854R9999

Interior expansion system parts

Covers, 1-field width with cutout

AG71

AG65

AG73

AG72

AG173

AG161

AG174

AG200

Article	Use for...	Unit	Type	Order code
Cover , 1-field width, with 90° press-and-turn lock				
Height x width				
300 x 250 mm, with cutout For 1 x NH-fuse switch disconnector NH00	M(B)T135(B)	1	AG71	2CPX062873R9999
300 x 250 mm, with cutout For 2 x NH-fuse switch disconnector NH00	M(B)T136(B)	1	AG65	2CPX062870R9999
600 x 250 mm, with cutout For 4 x NH-fuse switch disconnector NH00	M(B)T137(B)	1	AG73	2CPX062875R9999
450 x 250 mm, with cutout For 1 x NH-fuse switch disconnector NH1	M(B)T142(B)	1	AG72	2CPX062874R9999
750 x 250 mm, with cutout For 2 x NH-fuse switch disconnector NH1	M(B)T143(B)	1	AG173	2CPX062899R9999
450 x 250 mm, with cutout For 1 x NH-fuse switch disconnector NH2	M(B)T144(B)	1	AG161	2CPX062887R9999
750 x 250 mm, with cutout For 2 x NH-fuse switch disconnector NH2	M(B)T145(B)	1	AG174	2CPX062900R9999
300 x 250 mm, with cutout				
For OT-circuit OT160M3	MA160ALAB	1	AG200	2CPX062931R9999
For OT-circuit OT200E03P, OT250E03P	MA200ALAB MA250ALAB	1	AG201	2CPX062932R9999

Interior expansion system parts

Covers, 1-field width with cutout

AG205

AG208

AG206

AG207

AG1304

AG127

AG175

AG160

AG121

AG131

Article	Use for...	Unit	Type	Order code
Cover , 1-field width, with 90° press-and-turn lock				
Height x width				
300 x 250 mm, with cutout For Tmax circuit XT1, XT3	M(B)A190T	1	AG205	2CPX062936R9999
300 x 250 mm, with cutout				
For Tmax circuit XT1	MA100ALXB MA160ALXB	1	AG208	2CPX062993R9999
For Tmax circuit XT3	MA200ALXB MA250ALXB	1	AG209	2CPX062994R9999
300 x 250 mm, with cutout For Tmax circuit XT2	M(B)A191T	1	AG206	2CPX062855R9999
450 x 250 mm, with cutout For Tmax circuit XT4	M(B)A193T	1	AG207	2CPX062856R9999
450 x 250 mm, with cutout For Tmax circuitT4, 3-pole For Tmax circuit T5 (400), 3-pole	M(B)A192T	1	AG1304	2CPX064157R9999
300 x 250 mm, with cutout				
For S700	M(B)H150	1	AG127	2CPX062986R9999
For S750	M(B)H151	1	AG128	2CPX062989R9999
150 x 250 mm, with cutout For protective hose	M(B)V180 M(B)V181 M(B)V182	1	AG175	2CPX062901R9999
300 x 250 mm, with cutout For bus-mounting fuse socket 5 x 3 x D02	M(B)R102(B)	1	AG160	2CPX062886R9999
300 x 250 mm, with cutout For bus-mounting fuse socket Space for horizontal installation devices 134 mm	M(B)R102H	1	AG121	2CPX062969R9999
450 x 250 mm, with cutout For bus-mounting fuse socket Space for horizontal installation devices 295 mm	M(B)R103H	1	AG131	2CPX062970R9999

Interior expansion system parts

Covers, 1-field width with cutout/with viewing window

AG132

AG164

AG165

AG240

AG243

AG246

AG12S

Article	Use for...	Unit	Type	Order code
Cover , 1-field width, with 90° press-and-turn lock				
Height x width				
150 x 250 mm, with cutout For measuring devices, 96 x 96 mm	M(B)U156	1	AG132	2CPX062992R9999
300 x 250 mm, with cutout For measuring devices, 96 x 96 mm	M(B)U157	1	AG164	2CPX062890R9999
450 x 250 mm, with cutout For measuring devices, 96 x 96 mm	M(B)U158	1	AG165	2CPX062891R9999
450 x 250 mm, with cutout For 3 x NH-fuse switch disconnector NH00 100 mm busbar center distance	MD152B	1	AG240	2CPX042127R9999
750 x 250 mm, with cutout For 4 x NH-fuse switch disconnector NH00 185 mm busbar center distance	MD100B	1	AG243	2CPX042187R9999
900 x 250 mm, with cutout For 4 x NH-fuse switch disconnector NH00 + EFM 185 mm busbar center distance	MBD100E	1	AG246	2CPX042190R9999
Covers with viewing window **1-field width, with 90° press-and-turn lock**				
300 x 250 mm, with viewing window	-	1	AG12S	2CPX062228R9999
450 x 250 mm, with viewing window	-	1	AG13S	2CPX062230R9999
600 x 250 mm, with viewing window	-	1	AG14S	2CPX062232R9999

Interior expansion system parts

Covers, 2-field width with cutout

AG75

AG79

AG82

AG83

AG92

AG66

AG259

AG1404

AG227

Article	Use for...	Unit	Type	Order code
Covers, 2-field width, with 90° press-and-turn lock				
Height x width				
300 x 500 mm, with cutout For 4 x NH-fuse switch disconnector NH00	M(B)T236(B)	1	AG75	2CPX062876R9999
600 x 500 mm, with cutout For 8 x NH-fuse switch disconnector NH00	M(B)T237(B)	1	AG79	2CPX062877R9999
450 x 500 mm, with cutout For 2 x NH-fuse switch disconnector NH1	M(B)T242(B)	1	AG82	2CPX062878R9999
750 x 500 mm, with cutout For 4 x NH-fuse switch disconnector NH1	M(B)T243(B)	1	AG83	2CPX062879R9999
450 x 500 mm, with cutout For 2 x NH-fuse switch disconnector NH2	M(B)T244(B)	1	AG92	2CPX062884R9999
750 x 500 mm, with cutout For 4 x NH-fuse switch disconnector NH2	M(B)T245(B)	1	AG66	2CPX062871R9999
300 x 500 mm, with cutout For Tmax circuit XT1, XT3	M(B)A290T	1	AG259	2CPX062979R9999
450 x 500 mm, with cutout				
For Tmax circuit T4/T5, 3 and 4-pole	M(B)A292T	1	AG1404	2CPX064158R9999
For Tmax circuit T5	MA400ALSB MA630ALSB	1	AG198	2CPX062929R9999
300 x 500 mm, with cutout				
For S700	M(B)H250	1	AG227	2CPX062987R9999
For S750	M(B)H251	1	AG228	2CPX062990R9999

Interior expansion system parts

Covers, 2-field width with cutout

AG176

AG172

AG162

AG241

AG244

AG247

AG179

AG22S

Article	Use for...	Unit	Type	Order code
Covers, 2-field width, with 90° press-and-turn lock Height x width				
150 x 500 mm, with cutout For protective hose	M(B)V281 M(B)V282	1	AG176	2CPX062902R9999
300 x 500 mm, with cutout For bus-mounting fuse socket 14 x 3 x D02	M(B)R202(B)	1	AG172	2CPX062898R9999
150 x 500 mm, with cutout For measuring devices, 96 x 96 mm	M(B)U257	1	AG162	2CPX062888R9999
450 x 500 mm, with cutout For 8 x NH-fuse switch disconnector NH00 100 busbar center distance	MD252B	1	AG241	2CPX042128R9999
750 x 500 mm, with cutout For 8 x NH-fuse switch disconnector NH00	MD200B	1	AG244	2CPX042188R9999
For load break switches with fuse, ABB SlimLine XR Cutout 300 mm width 185 busbar center distance	-	1	AG177	2CPX062903R9999
900 x 500 mm, with cutout For 8 x NH-fuse switch disconnection rails NH00 + EFM 185 mm busbar center distance	MBD200E	1	AG247	2CPX042191R9999
750 x 500 mm, with cutout For 4 x NH-fuse switch disconnection rail NH1-3	MD21B MD22B	1	AG244	2CPX042188R9999
750 x 500 mm, with cutout For load break switches with fuse, ABB SlimLine XR Cutout 400 mm width	-	1	AG179	2CPX062905R9999
Covers with viewing window, 2-field width, with 90° press-and-turn lock				
300 x 500 mm, with viewing window	-	1	AG22S	2CPX062229R9999
450 x 500 mm, with viewing window	-	1	AG23S	2CPX062231R9999
600 x 500 mm, with viewing window	-	1	AG24S	2CPX062233R9999

Interior expansion system parts

Covers, 2-field width with cutout

Article		Use for...	Unit	Type	Order code
	Covers, 2-field width, with 90° press-and-turn lock Height x Width				
 AG208X	**600 x 500, with cutout** For XT5	MX208LX	1	AG208X	2CPX062995R9999
 AG208XB	**600 x 500, with cutout** For XT5 RC bottom	MX208LXB	1	AG208XB	2CPX062996R9999
 AG210X	**600 x 500, with cutout** For XT6	MX210LX	1	AG210X	2CPX062998R9999
 AG212X	**600 x 500, with cutout** For XT7	MX212LX	1	AG212X	2CPX062999R9999
 AG208XAL	**600 x 500, with cutout** For OT630-800, lever left	MX208LAL	1	AG208XAL	2CPX063189R9999
 AG208XAM	**600 x 500, with cutout** For OT630-800, lever middle	MX208LAM	1	AG208XAM	2CPX063190R9999

Interior expansion system parts

Covers, 3-field width with cutout

AG84

AG85

AG90



AG91

AG93

AG67

AG359

AG327

Article	Use for...	Unit	Type	Order code
Covers with cutout 3-field width, with 90° press-and-turn lock Height x width				
300 x 750 mm, with cutout For 6 x NH-fuse switch disconnectors Gr. 00	M(B)T336(B)	1	AG84	2CPX062880R9999
600 x 750 mm, with cutout For 12 x NH-fuse switch disconnectors Gr. 00	M(B)T337(B)	1	AG85	2CPX062881R9999
450 x 750 mm, with cutout For 3 x NH-fuse switch disconnectors Gr. 1	M(B)T342B	1	AG90	2CPX062882R9999
750 x 750 mm, with cutout For 6 x NH-fuse switch disconnectors Gr. 1	M(B)T343(B)	1	AG91	2CPX062883R9999
450 x 750 mm, with cutout For 3 x NH-fuse switch disconnectors Gr. 2	M(B)T344(B)	1	AG93	2CPX062885R9999
750 x 750 mm, with cutout For 6 x NH-fuse switch disconnectors Gr. 2	M(B)T345(B)	1	AG67	2CPX062872R9999
300 x 750 mm, with cutout For Tmax circuit XT1, XT3	M(B)A390T	1	AG359	2CPX062980R9999
300 x 750 mm, with cutout				
For S700	M(B)H350	1	AG327	2CPX062988R9999
For S750	M(B)H351	1	AG328	2CPX062991R9999

Interior expansion system parts

Covers, 3-field width with cutout

AG321

AG163

AG242

AG245

AG180

AG248

AG310XAL

AG310XAM

AG308XU

Article	Use for...	Unit	Type	Order code
Covers with cutout, 3-field width, with 90° press-and-turn lock Height x width				
300 x 750 mm, with cutout For bus-mounting fuse socket 24 x 3 x D02	M(B)R302(B)	1	AG321	2CPX062971R9999
150 x 750 mm, with cutout For measuring devices, 96 x 96 mm	M(B)U357	1	AG163	2CPX062889R9999
450 x 750 mm, with cutout For 12 x NH-fuse switch disconnection rails, 100 mm busbar center distance	MD352B	1	AG242	2CPX042129R9999
750 x 750 mm, with cutout For 12 x NH-fuse switch disconnection rails, 185 mm busbar center distance	MD300B	1	AG245	2CPX042189R9999
750 x 750 mm, with cutout For load break switches with fuse, ABB SlimLine XR Cutout 2 x 250 mm width 185 mm busbar center distance	-	1	AG178	2CPX062904R9999
750 x 750 mm, with cutout For load break switches with fuse, ABB SlimLine XR Cutout 600 mm width	-	1	AG180	2CPX062906R9999
900 x 750 mm, with cutout For 12 x NH-fuse switch disconnection rails NH00 + EFM 185 mm busbar center distance	MBD300E	1	AG248	2CPX042192R9999
600 x 750, with cutout For OT1000-1250, lever left	MX310LAL	1	AG310XAL	2CPX063191R9999
600 x 750, with cutout For OT1000-1250, lever middle	MX310LAM	1	AG310XAM	2CPX063192R9999
600 x 750, with cutout For ATS500-800	MX308LU	1	AG308XU	2CPX063193R9999

Interior expansion system parts

Cover parts

ED137P4

ED138P4

ED139P4

ED135P4

ED110

ED58P10

ED50P12

ED136P4

ED41P4

ZB35P5

Article	Use for...	Unit	Type	Order code
Cover bracket 45 mm tall For fastening (inserting, turning) on EDF profile rails as well as latching a bulkhead; For DIN rails 35 x 7.5 mm, only use this cover bracket	M(B)R...03	4	ED137P4	2CPX062600R9999
		40	ED137P40	2CPX062601R9999
Cover bracket 52.5 mm tall For fastening (inserting, turning) on EDF and WR profile rails, as well as for latching a partition wall, for DIN rails, 35 x 15 mm, only use this cover bracket	All modules	4	ED138P4	2CPX062630R9999
		12	ED138P12	2CPX062602R9999
		40	ED138P40	2CPX062603R9999
		1600	ED138P1600	2CPX062702R9999
Cover bracket 88 mm tall For fastening (inserting, turning) on EDF and WR profile rails, as well as for latching a partition wall; to be used when installing devices at greater depths or with busbar systems		4	ED139P4	2CPX062604R9999
		40	ED139P40	2CPX062734R9999
Spacer piece To extend the cover holder by 25 mm	M(B)R...03	4	ED135P4	2CPX062610R9999
		40	ED135P40	2CPX062733R9999
Cover bracket 1 set left / right		1	ED110	2CPX039320R9999
DIN rails adapter For cover brackets ED138 and ED139 to be snapped onto the DIN rail from the front		10	ED58P10	2CPX062338R9999
90 degree press-and-turn lock	All covers	12	ED50P12	2CPX062337R9999
Screw insert Fr metric thread, M5, for mounting macrolon, sheet metal or aluminum plates on the EDF cover brackets		4	ED136P4	2CPX062611R9999
90 degree press-and-turn lock For mounting macrolon, sheet metal or aluminum plates on the cover brackets		4	ED41P4	2CPX062332R9999
Sealing nipple for subsequent installation in standard field covers (6 mm hole must be drilled)		5	ZB35P5	2CPX062392R9999

Interior expansion system parts

SMISSLINE TP system parts accessories

ZW430

ZW436

ZW470

ZW257

ZW359

ZW590

ZW592

ED73

ED52

ZX399

Article	To be used for...	Unit	Type	Order code
Cable laying grids width 100 mm Length				
450 mm	M(B)C103VS	1	ZW430	2CPX042170R9999
600 mm	M(B)C104VS	1	ZW431	2CPX042171R9999
750 mm	M(B)C105VS	1	ZW432	2CPX042172R9999
900 mm	-	1	ZW433	2CPX042173R9999
1050 mm	-	1	ZW434	2CPX042174R9999
2000 mm	-	1	ZW435	2CPX042175R9999
Cable laying grids width 200 mm Length				
450 mm	M(B)C203VS	1	ZW436	2CPX042176R9999
600 mm	M(B)C204VS	1	ZW437	2CPX042177R9999
750 mm	M(B)C205VS	1	ZW438	2CPX042178R9999
900 mm	-	1	ZW439	2CPX042179R9999
1050 mm	-	1	ZW440	2CPX042180R9999
2000 mm	-	1	ZW441	2CPX042181R9999
3000 mm	-	1	ZW460	2CPX073256R9999
Cable laying grids width 300 mm Length				
3000 mm	-	1	ZW470	2CPX073257R9999
Mounting brackets for cable laying grids For min. cabinet depths of 275 mm	For SMISSLINE TP 125 A			
1 panel wide	M(B)C1...VS	1	ZW257	2CPX042182R9999
2 panel wide	M(B)C2...VS	1	ZW258	2CPX042183R9999
3 panel wide	M(B)C3...VS	1	ZW359	2CPX042912R9999
Mounting brackets for cable laying grids For min. cabinet depths of 275 mm	For SMISSLINE TP 250 A			
1 panel wide	M(B)C1...VS	1	ZW590	2CPX042922R9999
2 panel wide	M(B)C2...VS	1	ZW591	2CPX042923R9999
3 panel wide	M(B)C3...VS	1	ZW592	2CPX042924R9999
DIN rails vertical For a module height of				
450 mm	M(B)C...03VS	1	ED73	2CPX042184R9999
600 mm	M(B)C...04VS	1	ED74	2CPX042185R9999
750 mm	M(B)C...05VS	1	ED75	2CPX042186R9999
DIN rails horizontal mounting				
2 panel wide	M(B)C2...HS	1	ED52	2CPX039252R9999
3 panel wide	M(B)C3...HS	1	ED53	2CPX039253R9999
Fixing brackets for horizontal DIN rails				
1 set left / right	M(B)C...HS	1	ZX399	2CPX062669R9999

Interior expansion system parts

SMISSLINE TP cover parts accessories

AS22H

Article	To be used for...	Unit	Type	Order code
Plastic cover horizontal with device slot, 2 panel wide				
300 x 500 mm	M(B)C202HS	1	AS22H	2CPX062764R9999
450 x 500 mm	M(B)C203HS	1	AS23H	2CPX062765R9999
600 x 500 mm	M(B)C204HS	1	AS24H	2CPX062766R9999
750 x 500 mm	M(B)C205HS	1	AS25H	2CPX062767R9999

AS32H

Article	To be used for...	Unit	Type	Order code
Plastic cover horizontal with device slot, 3 panel wide				
300 x 750 mm	M(B)C302HS	1	AS32H	2CPX062768R9999
450 x 750 mm	M(B)C303HS	1	AS33H	2CPX062769R9999
600 x 750 mm	M(B)C304HS	1	AS34H	2CPX062770R9999
750 x 750 mm	M(B)C305HS	1	AS35H	2CPX062771R9999

Plastic cover vertical

AS13V

Plastic cover vertical with device slot, 1 panel wide				
450 x 500 mm	M(B)C103VS	1	AS13V	2CPX062772R9999
600 x 500 mm	M(B)C104VS	1	AS14V	2CPX062773R9999
750 x 500 mm	M(B)C105VS	1	AS15V	2CPX062774R9999

AS23V

Plastic cover vertical with device slot, 2 panel wide				
450 x 500 mm	M(B)C203VS	1	AS23V	2CPX062775R9999
600 x 500 mm	M(B)C204VS	1	AS24V	2CPX062776R9999
750 x 500 mm	M(B)C205VS	1	AS25V	2CPX062777R9999

AS35V

Plastic cover vertical with device slot, 3 panel wide				
750 x 750 mm	M(B)C305VS	1	AS35V	2CPX062796R9999

Interior expansion system parts

Extension frame/safety terminal cover

ED212

Article	Use for...	Unit	Type	Order code
Extension frame for covers For fields with cover brackets 52.5 mm (ED138, etc.), plastic frame to pre-set the cover by 25 or 35 mm External dimensions in mm				
1-field width				
300 x 250	AG12	1	ED212	2CPX062782R9999
450 x 250	AG13	1	ED213	2CPX062783R9999
600 x 250	AG14	1	ED214	2CPX062784R9999
750 x 250	AG15	1	ED215	2CPX062785R9999
2-field width				
300 x 500	AG22	1	ED222	2CPX062787R9999
450 x 500	AG23	1	ED223	2CPX062788R9999
600 x 500	AG24	1	ED224	2CPX062789R9999
750 x 500	AG25	1	ED225	2CPX062790R9999
3-field width				
300 x 750	AG32	1	ED232	2CPX062792R9999
450 x 750	AG33	1	ED233	2CPX062793R9999
600 x 750	AG34	1	ED234	2CPX062794R9999
750 x 750	AG35	1	ED235	2CPX062795R9999

The following is also required per frame:
for 25 mm, increase 1 x ED135P4
for 35 mm, increase 1 x ED139P4

Interior expansion system parts

Busbar systems for NH-fuse switch disconnector

Size NH..	Rated current I_n	Copper rail in mm	Terminal	Load break switch St.	Use for...	Unit	Type	Order code
Busbar systems with access line, line cross-section 35 mm², Line length 500 mm								
NH00	320 A	20 x 5	M8	4	-	1	ZH55	2CPX038559R9999
Busbar systems without access line								
NH00	320 A	20 x 5	M8	2	MT136B	1	ZH214	2CPX060443R9999
NH00	320 A	20 x 5	M8	4	MT236B	1	ZH211	2CPX060440R9999
NH00	320 A	20 x 5	M8	6	MT336B	1	ZH311	2CPX060450R9999
NH00	320 A	20 x 5	M8	4	MT137B	1	ZH216	2CPX060445R9999
NH00	320 A	20 x 5	M8	8	MT237B	1	ZH212	2CPX060441R9999
NH00	320 A	20 x 5	M8	12	MT337B	1	ZH312	2CPX060451R9999
NH1/NH2	440 A	30 x 5	M10	2	MT242B MT244B	1	ZH217	2CPX060446R9999
NH1/NH2	630 A	30 x 10	M10	4	MT243B MT245B	1	ZH218	2CPX060447R9999
NH1/NH2	440 A	30 x 5	M10	3	MT342B MT344B	1	ZH317	2CPX060456R9999
NH1/NH2	630 A	30 x 10	M10	6	MT343B MT345B	1	ZH318	2CPX060457R9999


ZH55

ZH214

ZH211


ZH311

ZH216


ZH212


ZH312

ZH217


ZH218


ZH317


ZH318

> **Important note:** If arranged in a single row, use 3 straight or 3 angled cable lugs to connect to the supply line. If arranged in two rows, 3 angled cable lugs to connect to the supply line.

Interior expansion system parts

Separator shutters and insulating plates for NH fuse switch disconnectors

ZH425

ZH426

ZH427

ZH428

ZH439

ZH440

ZH447

ZH449

ZH442

ZX148



ZH53

Article	Use for...	Unit	Type	Order code
NH00 fuse switch disconnector				
Single shutter	MT135B	1	ZH425	2CPX062952R9999
Double shutter	MT136B MT137B MT236B MT237B	1	ZH426	2CPX062953R9999
Triple shutter	MT336B MT337B	1	ZH427	2CPX062954R9999
Single shutter closed	-	1	ZH428	2CPX062955R9999
Double shutter closed	-	1	ZH429	2CPX062956R9999
Triple shutter closed	-	1	ZH430	2CPX062957R9999
NH1 fuse switch disconnector				
Single shutter	MT...42B MT...43B MT...51B	1	ZH438	2CPX062961R9999
Double shutter	-	1	ZH439	2CPX062962R9999
Single shutter closed	-	1	ZH440	2CPX062963R9999
NH2 fuse switch disconnector				
Single shutter For 1-field width modules	MT144B MT145B	1	ZH447	2CPX039842R9999
Single shutter For 3-field width modules	MT344B MT345B	1	ZH448	2CPX062965R9999
Double shutter	MT244B MT245B MT344B MT345B	1	ZH449	2CPX062966R9999
Single shutter closed	-	1	ZH442	2CPX062939R9999
Insulating plates for non-allocated busbar ends for...				
Fuse switch disconnectors including attachment material				
NH00	-	1	ZX148	2CPX044018R9999
NH1	-	1	ZX128	2CPX039128R9999
NH2	-	1	ZX129	2CPX039129R9999
N/PE rails for attaching behind the disconnector cross-beams for				
NH00 fuse switch disconnector Copper 20 x 4 mm, including attachment material	-	1	ZH53	2CPX038557R9999

Interior expansion system parts

NH fuse switch disconnector

ZH411

ZH412

ZH431

ZH441

ZH414

ZH415

Article	Use for...	Unit	Type	Order code
NH fuse switch disconnector For mounting with EDF and WR mounting frame on disconnector cross-beam				
NH00 fuse switch disconnector Rated current (I_n) max. 160 A, with screw connection M8, without shutter	MT135B MT...36B MT...37B	1	ZH411	2CPX062947R9999
NH00 fuse switch disconnector Rated current (I_n) max. 160 A, with U-clamp terminals up to 50 mm² without shutter	-	1	ZH412	2CPX062948R9999
NH1 fuse switch disconnector Rated current (I_n) max. 250 A, with screw connection M10, without shutter	MT...42B MT...43B	1	ZH431	2CPX062958R9999
NH2 fuse switch disconnector Rated current (I_n) max. 400 A, with screw connection M12, without shutter	MT...44B MT...45B	1	ZH441	2CPX062964R9999
NH fuse switch-disconnector for mounting with EDF mounting frame on busbar systems, copper 12 x 5 mm or copper 12 x 10 mm, busbar distance 40 mm				
NH00 fuse switch disconnector Rated current (I_n) max. 160 A, with U-clamp terminals up to 50 mm² without shutter	ED...TA	1	ZH414	2CPX062950R9999
NH00 fuse switch disconnector Rated current (I_n) max. 160 A, with triple terminals up to 10 mm² without shutter	-	1	ZH415	2CPX062951R9999

Interior expansion system parts

NH fuse switch disconnector

ZE60

ZE61

ZE62

ZA4P10

Article	Use for...	Unit	Type	Order code
Neozed bus-mounting fuse socket E18, width 26 mm For gauge ring inserts, 3-pole, with covers and nameplates, with E18 thread, safety fuse max. 63 A		1	ZE60	2CPX061045R9999
		10	ZE60P10	2CPX062400R9999
Diazed bus-mounting fuse socket E27, width 42 mm For gauge ring inserts, 3-pole, with covers and nameplates, with E27 thread, safety fuse max. 25 A		1	ZE61	2CPX061046R9999
Diazed bus-mounting fuse socket E33, width 56 mm For gauge ring inserts, 3-pole, with covers and nameplates, with E33 thread, safety fuse max. 63 A		1	ZE62	2CPX061047R9999
Shutters instead of bus-mounting fuse socket Color similar to RAL 7035, For complying with the contact protection IPXXC		10	ZA4P10	2CPX062374R9999

Interior expansion system with distribution panels/combination sets

Possible applications for wall-mounted and standalone cabinets

Wall-mounted cabinets of the series U, A, B and TwinLine-G, TwinLine-L and TwinLine-W

Example: Expansion with distribution panels/combination sets in the TwinLine-G wall-mounted cabinet

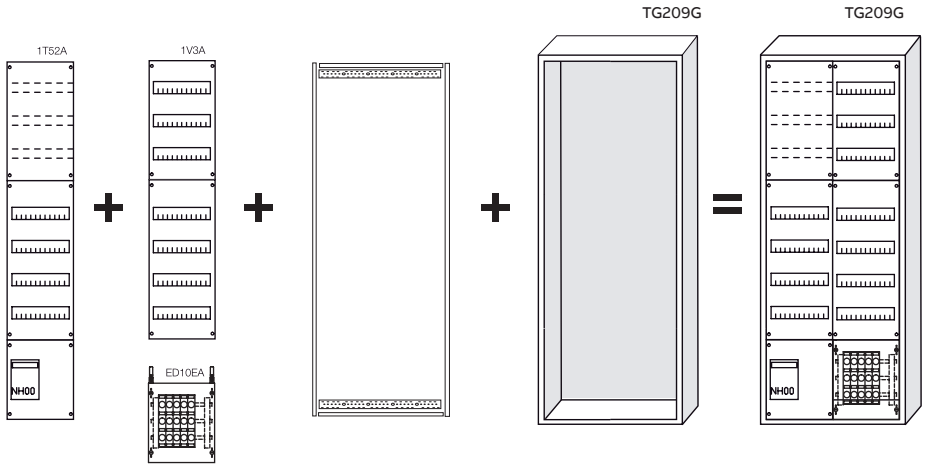

Distribution panel
+ distribution panel and combination kit
+ EDF installation kit
+ empty cabinet
= wall-mounted distributor

Delivery form
EDF installation kit, distribution panels, combination sets (mounted ex works on EDF profile) and empty cabinet are delivered individually packaged.

Standalone cabinets of the series TwinLine H and TwinLine-G, TwinLine-L and TwinLine-W
Series switching cabinets of the series TriLine®, Pro *E* Power system/fire protection housing of the series SF

Example: Expansion with distribution panels/combination sets in the TwinLine- L standalone cabinet

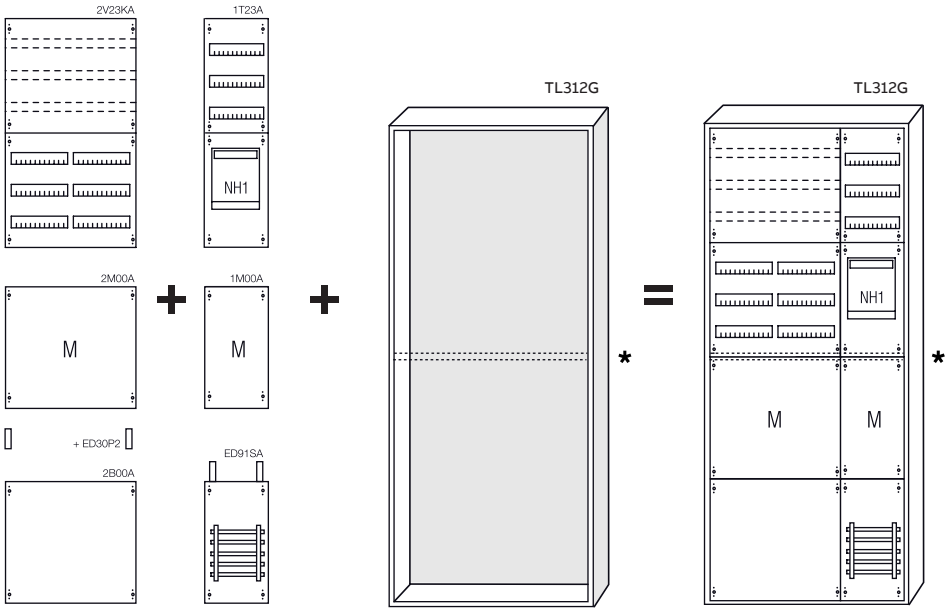

Distribution panels
+ combination sets
+ panel connector
+ empty cabinet
= standalone distributor

Delivery form
Distribution panels, combination sets (mounted ex works on EDF profile)
Panel connector and empty cabinet are each delivered individually packaged.

***** The EDF mounting frame may not exceed a maximum height of 1350 mm (installation height 5) at once. For structural reasons in standalone cabinets (prepared for EDF mounting frame), that is why a central supporting rail is mounted ex works, which can be moved up and down in the grid 150 mm.

+ panel connector ED30P2

Internal expansion system with distribution panels

Population of the distribution panels



Distribution panels with DIN rails for rail-mounted devices
Equipment: DIN rail 35 x 15 mm for device installation and with hole pattern for the wiring system, row spacing 125 mm, with plastic covers, cutouts for rail-mounted devices DIN 43880 for 12 PLE (216 mm) per field width

> Wire holder and locking strips see page 260



Distribution panels with DIN rails for terminal blocks
Equipment: DIN rail 35 x 15 mm for terminal blocks with hole pattern for the wiring system, row spacing 125 mm, with plastic covers; for a protection-insulated design, use insulators ZK90; To mount the DIN rails to the rear, use ED33 deep angle piece and DIN rails for installation between the mounting frame

> Insulators page 260
> Deep angle piece page 260

Distribution panels with mounting plates
Equipment: Steel sheet metal mounting plate, Sendzimir galvanized surface, material thickness 2 mm; the mounting plate is mounted on deep angle piece ED33 and can be variably adjusted in depth; maximum installation depth between mounting plate and cover 143 mm, with plastic covers (cover closed)

Distribution panels with mounting cross-beams for device installation without holes
Equipment: For every 150 mm, a mounting cross-beam ZX35 is mounted on ED33 deep angle piece and can be variably adjusted in depth; the maximum installation depth between the cross-beam and cover is 143 mm, with plastic covers (cover closed)

Distribution panels as touch protection (or to expand with assembly parts)
Equipment: Empty panel without installation parts, with plastic covers (covers closed)

Distribution panels with busbars
Equipment: 5-Pole busbar system copper 12 x 5 mm, busbar spacing 40 mm, with plastic covers (covers closed)

> Busbar connection terminals page 260

Internal expansion system - Distribution panels

Rail-mounted devices



2V2A



2V2-150

- Expansion with DIN rails 35 x 15 mm
- Distribution panels or field combinations must have the same grid units as the cabinets, in which they are installed
- For standalone and row switching cabinets, two fields or field combinations must be installed one above the other
- Without N/PE quick plug-in terminals
- The EDF profile rails are included in the scope of delivery

Height		Width			Distribution of the covers in mm			From a cabinet		
GU	mm	PW	mm	PLE	top	middle	bottom	depth in mm	Type	Order code
Row spacing 125 mm										
3	450	1	250	36	450	-	-	120	1V00A	2CPX037580R9999
		2	500	72	450	-	-	120	2V00A	2CPX037581R9999
4	600	1	250	48	600	-	-	120	1V0A	2CPX037591R9999
		2	500	96	600	-	-	120	2V0A	2CPX037592R9999
5	750	1	250	60	300	-	450	120	1V1A	2CPX037610R9999
		2	500	120	300	-	450	120	2V1A	2CPX037611R9999
6	900	1	250	72	300	-	600	120	1V2A	2CPX037622R9999
		2	500	144	300	-	600	120	2V2A	2CPX037623R9999
6	900	1	250	72	450	-	450	120	1V23A	2CPX037634R9999
		2	500	144	450	-	450	120	2V23A	2CPX037635R9999
7	1050	1	250	84	450	-	600	120	1V3A	2CPX037639R9999
		2	500	168	450	-	600	120	2V3A	2CPX037640R9999
8	1200	1	250	96	450	-	750	120	1V4A	2CPX037651R9999
		2	500	192	450	-	750	120	2V4A	2CPX037652R9999
9	1350	1	250	108	450	450	450	120	1V5A	2CPX037665R9999
		2	500	216	450	450	450	120	2V5A	2CPX037666R9999
Row spacing 150 mm										
3	450	1	250	36	450	-	-	120	1V00-150	2CPX077800R9999
		2	500	72	450	-	-	120	2V00-150	2CPX077801R9999
4	600	1	250	48	600	-	-	120	1V0-150	2CPX077802R9999
		2	500	96	600	-	-	120	2V0-150	2CPX077803R9999
5	750	1	250	60	300	-	450	120	1V1-150	2CPX077804R9999
		2	500	120	300	-	450	120	2V1-150	2CPX077805R9999
6	900	1	250	72	300	-	600	120	1V2-150	2CPX077808R9999
		2	500	144	300	-	600	120	2V2-150	2CPX077809R9999

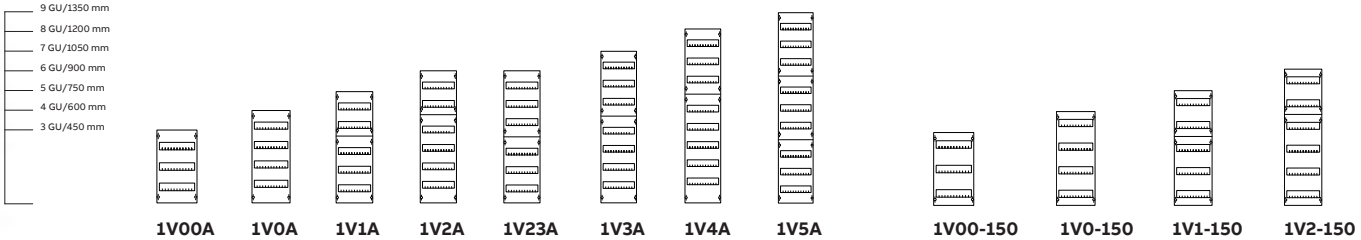

Internal expansion system - Distribution panels

Rail-mounted devices and terminal blocks



2V2KA



2V2K-150

- DIN rails for terminal blocks directly mounted on the mounting frame
- DIN rails for terminal blocks and rail-mounted devices 35 x 15 mm
- Distribution panels or field combinations must have the same grid units as the cabinets, in which they are installed
- For standalone and row switching cabinets, two fields or field combinations must be installed one above the other
- Without N/PE quick plug-in terminals
- The EDF profile rails are included in the scope of delivery

Height		Width			Distribution of the covers in mm			From a cabinet		
GU	mm	PW	mm	PLE	top	middle	bottom	depth in mm	Type	Order code
Row spacing 125 mm										
4	600	1	250	48	150	-	450	120	1V0KA	2CPX037593R9999
		2	500	96	150	-	450	120	2V0KA	2CPX037594R9999
5	750	1	250	60	300	-	450	120	1V1KA	2CPX037612R9999
		2	500	120	300	-	450	120	2V1KA	2CPX037613R9999
6	900	1	250	72	300	-	600	120	1V2KA	2CPX037624R9999
		2	500	144	300	-	600	120	2V2KA	2CPX037625R9999
6	900	1	250	72	450	-	450	120	1V23KA	2CPX037637R9999
		2	500	144	450	-	450	120	2V23KA	2CPX037638R9999
7	1050	1	250	84	450	-	600	120	1V3KA	2CPX037641R9999
		2	500	168	450	-	600	120	2V3KA	2CPX037642R9999
8	1200	1	250	96	450	-	750	120	1V4KA	2CPX037653R9999
		2	500	192	450	-	750	120	2V4KA	2CPX037654R9999
9	1350	1	250	108	450	450	450	120	1V5KA	2CPX037667R9999
		2	500	216	450	450	450	120	2V5KA	2CPX037668R9999
Row spacing 150 mm										
5	750	1	250	60	300	-	450	120	1V1K-150	2CPX077806R9999
		2	500	120	300	-	450	120	2V1K-150	2CPX077807R9999
6	900	1	250	72	300	-	600	120	1V2K-150	2CPX077810R9999
		2	500	144	300	-	600	120	2V2K-150	2CPX077811R9999

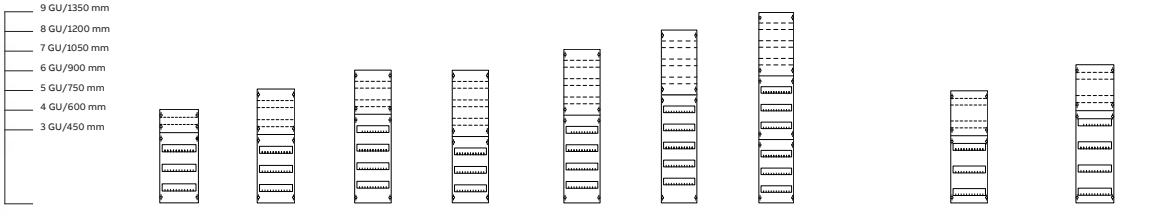

1V0KA **1V1KA** **1V2KA** **1V23KA** **1V3KA** **1V4KA** **1V5KA** **1V1K-150** **1V2K-150**

Internal expansion system - Distribution panels

Busbars 40 mm, terminal blocks and contact protection



2V002A **2V02A**

- Busbar center distance 40 mm
- With 5-pole busbars 12 x 5 mm
- With busbar bracket type ZX2BP2
- Rated current (I_n) max. 360 A (max. 12 x 10 mm)
- Distribution panels or field combinations must have the same grid units as the cabinets, in which they are installed
- For standalone and row switching cabinets, two fields or field combinations must be installed one above the other
- The EDF profile rails are included in the scope of delivery

Height		Width			Distribution of the covers in mm			From a cabinet depth in mm		
GU	mm	PW	mm	PLE	top	middle	bottom		Type	Order code
3	450	1	250	36	450	-	-	120	1V002A	2CPX037590R9999
		2	500	72	450	-	-	120	2V002A	2CPX037609R9999
4	600	1	250	48	300	-	300	120	1V02A	2CPX037606R9999
		2	500	96	300	-	300	120	2V02A	2CPX037607R9999



2B2A

- Distribution panels or field combinations must have the same grid units as the cabinets, in which they are installed
- For standalone and row switching cabinets, two fields or field combinations must be installed one above the other
- The EDF profile rails are included in the scope of delivery

3	450	1	250	36	450	-	-	120	1B00A	2CPX037585R9999
		2	500	72	450	-	-	120	2B00A	2CPX037586R9999
4	600	1	250	48	600	-	-	120	1B0A	2CPX037601R9999
		2	500	96	600	-	-	120	2B0A	2CPX037602R9999
5	750	1	250	60	750	-	-	120	1B1A	2CPX037620R9999
		2	500	120	750	-	-	120	2B1A	2CPX037621R9999
6	900	1	250	72	300	-	600	120	1B2A	2CPX037632R9999
		2	500	144	300	-	600	120	2B2A	2CPX037633R9999
7	1050	1	250	84	450	-	600	120	1B3A	2CPX037649R9999
		2	500	168	450	-	600	120	2B3A	2CPX037650R9999
8	1200	1	250	96	450	-	750	120	1B4A	2CPX037661R9999
		2	500	192	450	-	750	120	2B4A	2CPX037662R9999
9	1350	1	250	108	450	450	450	120	1B5A	2CPX037675R9999
		2	500	216	450	450	450	120	2B5A	2CPX037676R9999

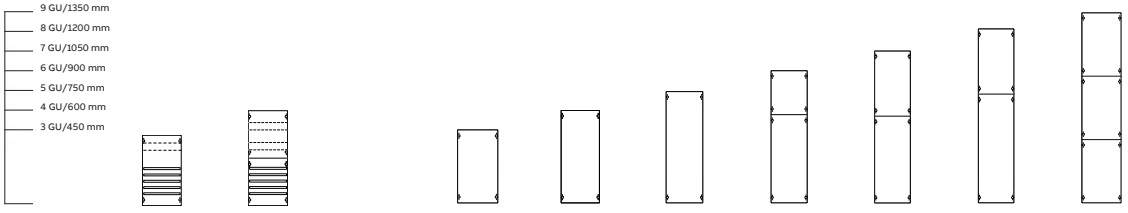

1V002A **1V02A** **1B00A** **1B0A** **1B1A** **1B2A** **1B3A** **1B4A** **1B5A**

Internal expansion system - Distribution panels

Mounting plates and mounting cross-beams



2M2A

- Mounting plates that are variably adjustable in depth via the deep angle piece ED33
- Distribution panels or field combinations must have the same grid units as the cabinets, in which they are installed
- For standalone and row switching cabinets, two fields or field combinations must be installed one above the other
- The EDF profile rails are included in the scope of delivery

Height		Width			Distribution of the covers in mm			From a cabinet depth in mm		
GU	mm	PW	mm	PLE	top	middle	bottom		Type	Order code
3	450	1	250	36	450	-	-	120	1M00A	2CPX037582R9999
		2	500	72	450	-	-	120	2M00A	2CPX037583R9999
4	600	1	250	48	600	-	-	120	1M0A	2CPX037595R9999
		2	500	96	600	-	-	120	2M0A	2CPX037596R9999
5	750	1	250	60	300	-	450	120	1M1A	2CPX037614R9999
		2	500	120	300	-	450	120	2M1A	2CPX037615R9999
6	900	1	250	72	300	-	600	120	1M2A	2CPX037626R9999
		2	500	144	300	-	600	120	2M2A	2CPX037627R9999
7	1050	1	250	84	450	-	600	120	1M3A	2CPX037643R9999
		2	500	168	450	-	600	120	2M3A	2CPX037644R9999
8	1200	1	250	96	450	-	750	120	1M4A	2CPX037655R9999
		2	500	192	450	-	750	120	2M4A	2CPX037656R9999
9	1350	1	250	108	450	450	450	120	1M5A	2CPX037669R9999
		2	500	216	450	450	450	120	2M5A	2CPX037670R9999



1MK2A

- Mounting cross-beams that are variably adjustable in depth via the deep angle piece ED33
- For contact-free mounting with M4 cage nuts
- Distribution panels or field combinations must have the same grid units as the cabinets, in which they are installed
- For standalone and row switching cabinets, two fields or field combinations must be installed one above the other
- The EDF profile rails are included in the scope of delivery

3	450	1	250	36	450	-	-	120	1MK00A	2CPX037179R9999
4	600	1	250	48	600	-	-	120	1MK0A	2CPX037180R9999
5	750	1	250	60	300	-	450	120	1MK1A	2CPX037181R9999
6	900	1	250	72	300	-	600	120	1MK2A	2CPX037182R9999

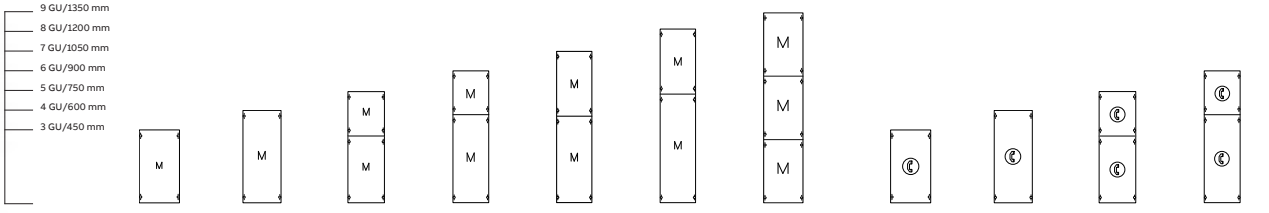

Internal expansion system - Combination sets

Busbars 40 mm/60 mm for operating equipment

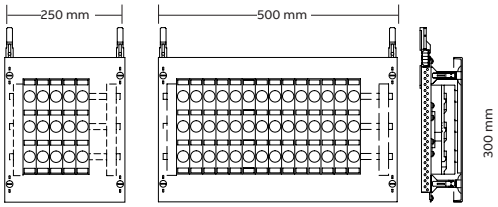

ED10EA **ED20EA**

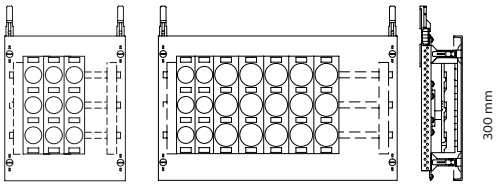

ED11EA **ED21EA**

- With 3-pole bus-mounting fuse sockets
- Busbar center distance 60 mm
- With 3-pole busbars 12 x 5 mm
- With busbar bracket type ZX151
- Rated current (I_n) max. 100 A
- Combination sets are plugged into the distribution panel at the top or bottom and mounted on the other side of the cabinet

Height		Width			Equipment				
GU	mm	PW	mm	PLE	Version	Number	From cabinet depth	Type	Order code
2	300	1	250	24	D02 (ZE60)	5	200	ED10EA	2CPX037800R9999
		2	500	48	D02 (ZE60)	14	200	ED20EA	2CPX037804R9999
2	300	1	250	24	Diazed E27 (ZE61)	3	200	ED11EA	2CPX037801R9999
		2	500	48	Diazed E27 (ZE61)/ Diazed E33N (ZE62)	2/5	200	ED21EA	2CPX037805R9999

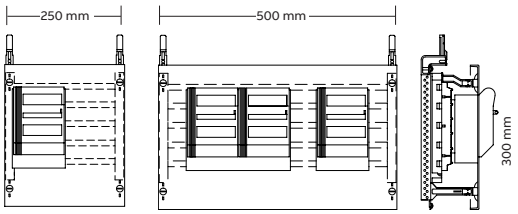

ED12TA **ED21TA**

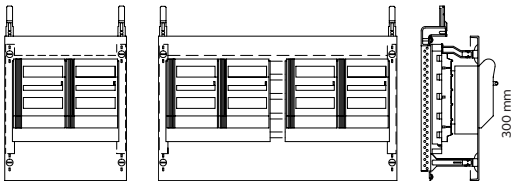

ED13TA **ED22TA**

- With NH fuse switch disconnector 3-pole
- Busbar center distance 40 mm
- With 3-pole busbars 12 x 5 mm
- With busbar bracket type ZX2BP2
- Rated current (I_n) max. 250 A
- Combination sets are plugged into the distribution panel at the top or bottom and mounted on the other side of the cabinet

2	300	1	250	24	NH00 (ZH414)	1	200	ED12TA	2CPX037802R9999
		2	500	48	NH00 (ZH414)	3	200	ED21TA	2CPX037806R9999
2	300	1	250	24	NH00 (ZH414)	2	200	ED13TA	2CPX037803R9999
		2	500	48	NH00 (ZH414)	4	200	ED22TA	2CPX037807R9999

Internal expansion system - Combination sets

Busbars

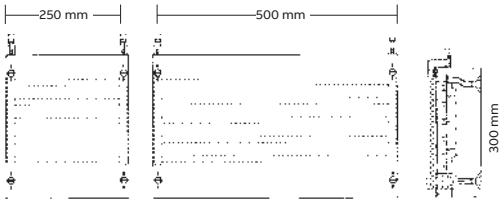

ED61SA **ED62SA**

- Busbar center distance 40 mm
- With 5-pole busbars 12 x 5 mm
- With busbar bracket type ZX2BP2
- Rated current (I_n) max. 250 A
- Combination sets are plugged into the distribution panel at the top or bottom and mounted on the other side of the cabinet

Height		Width					
GU	mm	PW	mm	PLE	From cabinet depth	Type	Order code
2	300	1	250	24	200	ED61SA	2CPX037810R9999
		2	500	48	200	ED62SA	2CPX037811R9999

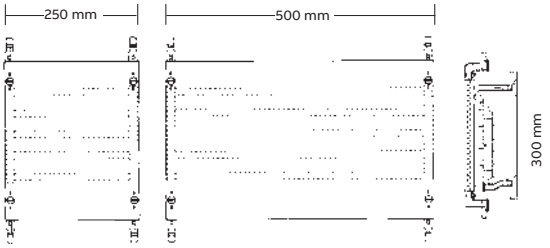

ED71SA **ED72SA**

- Busbar center distance 40 mm
- With 5-pole busbars 12 x 5 mm
- With busbar bracket type ZX2BP2
- Rated current (I_n) max. 250 A
- Combination sets are plugged into distribution panels at the top and bottom and thus are provided as an interim installation

2	300	1	250	24	200	ED71SA	2CPX037812R9999
		2	500	48	200	ED72SA	2CPX037813R9999

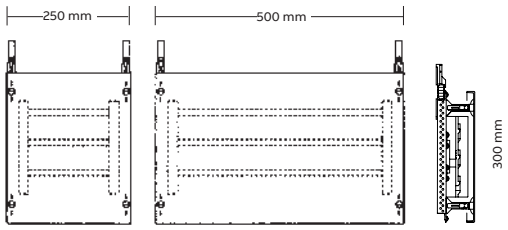

ED55A **ED56A**

- Busbar center distance 60 mm
- With 3-pole busbars 12 x 5 mm
- With busbar bracket type ZX151
- Rated current (I_n) max. 250 A
  (for expansion with bus-mounting fuse socket max. 100 A)
- Combination sets are plugged into the distribution panel at the top or bottom and mounted on the other side of the cabinet

2	300	1	250	24	200	ED55A	2CPX037808R9999
		2	500	48	200	ED56A	2CPX037809R9999

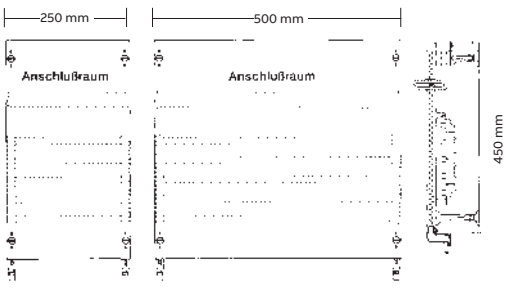

ED91SA **ED92SA**

- Busbar center distance 40 mm
- With 5-pole busbars 12 x 5 mm
- With busbar bracket type ZX2BP2
- Rated current (I_n) max. 250 A
- In addition, mounted with a DIN rail on a deep angle piece ED33P2
- Combination sets are plugged into the distribution panel at the top or bottom and mounted on the other side of the cabinet

3	450	1	250	36	200	ED91SA	2CPX037816R9999
		2	500	72	200	ED92SA	2CPX037817R9999

Internal expansion system - Combination sets

Mounting plates, terminal blocks and Tmax circuit

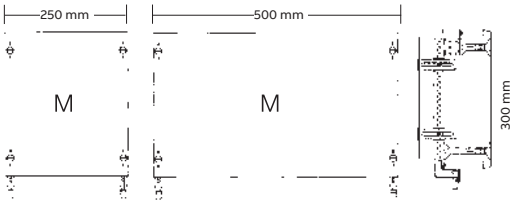

ED61MA **ED62MA**

- Mounting plates that are variably adjustable in depth via the deep angle piece ED33
- Combination sets are plugged into the distribution panel at the top or bottom and mounted on the other side of the cabinet
- The maximum installation depth between mounting plate and cover is 178 mm

Height		Width					
GU	mm	PW	mm	PLE	From cabinet depth	Type	Order code
2	300	1	250	24	200	ED61MA	2CPX037820R9999
		2	500	48	200	ED62MA	2CPX037821R9999

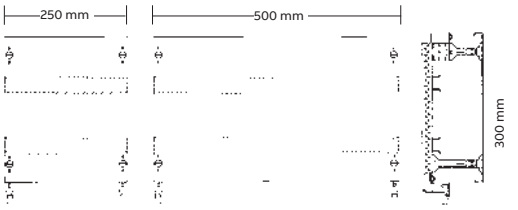

ED61KA **ED62KA**

- With horizontally-arranged DIN rails 35 x 15 mm
- DIN rails can be set up to be protection-insulated with the insulator piece ZK90P2 if necessary
- Row spacing 150 mm (can be moved when it is needed)
- Combination sets are plugged into the distribution panels at the top and bottom and attached on the other side of the cabinet

2	300	1	250	24	200	ED61KA	2CPX037822R9999
		2	500	48	200	ED62KA	2CPX037823R9999
3	450	1	250	36	200	ED91KA	2CPX037824R9999
		2	500	72	200	ED92KA	2CPX037825R9999

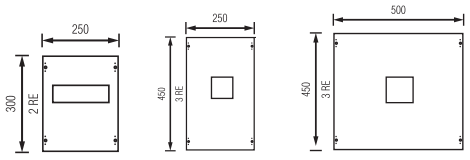

ED250T3 **ED320T4** **ED630T5**

- For power switches ABB T-max
- ED250T3, Tmax XT1, 2 x 3-pole, 1 x 4-pole
  Tmax XT3, 1 x 3-pole, 1 x 4-pole, in the small distributor only 1 x Tmax XT1 with rocker arm max. I_n to 100 A
- ED320T4, Tmax, T4, 3-pole
- ED630T5, Tmax, T4, 4-pole and Tmax, T5, 3- and 4-pole
  Combination sets can only be used in combination with distribution panels

2	300	1	250	24	200	ED250T3	2CPX037826R9999
3	450	1	250	36	200	ED320T4	2CPX037827R9999
		2	500	72	200	ED630T5	2CPX037828R9999

Interior expansion system - Distribution panels/combination sets

General accessories

ED30P2

ED31P2

ED32P2



ZK300

Article	Unit	Type	Order code
Panel connector for EDF profile For any combination of distribution panels or EDF profile rails up to a maximum of 9 grid units	2	ED30P2	2CPX062302R9999
Lowering connector for EDF profile For equalizing deep-lying mounting levels of busbars and mounting plate panels up to 9 grid units	2	ED31P2	2CPX062303R9999
Lowering bracket for EDF profile For equalizing the front to rear mounting level	2	ED32P2	2CPX062304R9999
N/PE busbar system for distribution panels Copper 12 x 5 mm, max. connection 95 mm², rated current (I_n) 250 A			
1-field width	1	ZK300	2CPX038551R9999
2-field width	1	ZK301	2CPX038552R9999

ZK113B

ZK113G

ZK10P10

ZK14

ZK15

Article	Number of terminals 1.5 - 4 mm²	Number of terminals 2.5 - 25 mm²	External dimensions H x W x D in mm	Unit	Type	Order code
N Quick plug-in terminals For Quick plug-in carrier	5	0	23 x 32 x 21	1	ZK50B	2CPX062750R9999
	5	1	32 x 32 x 31	1	ZK51B	2CPX062751R9999
	8	2	32 x 49 x 31	1	ZK82B	2CPX062752R9999
	11	3	32 x 65 x 31	1	ZK113B	2CPX062753R9999
	14	4	32 x 82 x 31	1	ZK144B	2CPX062754R9999
	17	5	32 x 98 x 31	1	ZK175B	2CPX062755R9999
	20	6	32 x 115 x 31	1	ZK206B	2CPX062756R9999
PE Quick plug-in terminals For Quick plug-in carrier	5	1	32 x 32 x 31	1	ZK51G	2CPX062757R9999
	8	2	32 x 49 x 31	1	ZK82G	2CPX062758R9999
	11	3	32 x 65 x 31	1	ZK113G	2CPX062759R9999
	14	4	32 x 82 x 31	1	ZK144G	2CPX062760R9999
	17	5	32 x 98 x 31	1	ZK175G	2CPX062761R9999
	20	6	32 x 115 x 31	1	ZK206G	2CPX062762R9999
Connecting bridges For Quick plug-in terminals				10	ZK10P10	2CPX062763R9999
Quick plug-in carrier For distribution panels Usable width for Quick plug-in terminals 214 mm 13 units				1	ZK14	2CPX064983R9999
Adapter for ZK50B By snapping the ZK50B N Quick plug-in terminal into the ZK15 adapter, the ZK50BT is ready for lateral mounting in the UK5 ..., A3 ... or for snapping onto the DIN rail				1	ZK15	2CPX064984R9999

Distribution panel system CombiLine X
General information

Busbars for low voltage switchgear and controlgear assemblies

In this chapter you will find useful information on planning a low-voltage distribution. After you have collected the necessary data in the first step, the following information will help you to carry out the project planning in such a way that you can provide a design verification.

The following parameters are critical in order to define the dimensions of a busbar system:

- Necessary current carrying capacity I_{nA} / I_{nC}
- Rated peak withstand current (I_{pk})
- Rated short-time withstand current (I_{cw})
- Rated voltage (U_e)
- Rated impulse withstand voltage (U_{imp})

The specifications for these design values can be found on the next pages.

The short-circuit strength of the busbar system is determined by the

- arrangement of the conductors to each other
- Inherent stability of the conductors

The inherent stability of the conductor (the busbar) depends on the conductor geometry (flat rail/profile rail).

The inherent stability and the arrangement of the busbars to each other determine the spacing of the busbar supports. The busbar holder shall be capable of withstanding the forces that occur. Exceeding of the conductors' inherent withstand rating and incorrect support distances will lead to unacceptable conductor deformations. The busbar support must absorb the forces that occur. If the inherent strength of the conductors is exceeded and the support distances are incorrectly selected, this will result in impermissible deformations of the conductors.

The calculation of the occurring forces, the inherent stability and the maximum distances between the busbar supports can be carried out according to DIN VDE 0103 (IEC 60865-1).

Distribution panel system CombiLine N
General information

Project planning of distribution board and design verification
When designing the system, it is necessary to clarify the level of the short-circuit current occurring at the installation location for the verification.

In the following cases a short circuit withstand rating verification is not required as per DIN EN 61439:
- If the rated short-time withstand current or rated conditional short-circuit current at the installation site is less than 10 kA
- If a cut off current of current-limiting devices is not exceeding 17 kA at the terminals of the incoming circuit of the assembly

If this is not the case, verification must be provided by means of an examination.

If higher short-circuit values than the above-mentioned values are to be expected at the installation site, you can alternatively use the tables derived from numerous tests for verification. You will find them on the next pages to prove the strength of the busbar system you have realized with our components.

Notes on the design of busbar connections
For the connection of busbars, DIN 43 673 (busbars - bores and screw connections) should be observed.

It contains information on how connections
- should be made in geometry
- with which fastening elements
- and with which torques.

Of course, on the selection pages of this chapter we offer you the appropriate materials to make secure connections.

Distribution panel system CombiLine N

Technical specifications of the busbar holder ZX2P2

ZX2P2

Technical specifications
Busbar holder ZX2P2
Busbar system 5-Pole
Busbar centre spacing 40 mm
Installation in distribution board and meter panels
Cu busbars 12 x 5 mm
Cu busbars 12 x 10 mm (by breaking-off of the holder)
Rated current (I_{cw}) max 350 A
Rated short-time withstand current (I_{cw}) 0.3 sec. see table
Rated peak withstand current (I_{pk}) 0.1 sec. see table
Sultable for E-Cu busbars, unprocessed and blank

Continuous currents according to DIN 43671 for busbars made of E-Cu with.
Rectangular cross-section in indoor facilities at 25° C air temperaturearound the conductor and max. 65° C rail temperature. In case of parameter deviations.
Consider correction factors of DIN 43671.

Dimensions	Continuous current in A	Cross section	Weight
Cu busbars H x W (mm)	1 Cu busbar	in mm²	In kg/m
12 x 5	250	59.5	0.532
12 x 10	350	119.0	1.064

Short circuit withstand rating			
Cu busbars H x W (mm)	Busbar holder spacing max. (mm)	I_{cw}/kA	I_{pk}/kA
12 x 5	283	15 (0.3 sec.)	36
12 x 10	283	15 (0.3 sec.)	36

Distribution panel system CombiLine N

Technical specifications of the busbar holder ZX95P2

ZX95P2

Technical specifications
Busbar holder ZX95P2
Busbar system 5-Pole
Busbar centre spacing 40 mm
Cu busbars 12 x 5 mm
Cu busbars 12 x 10 mm (by breaking-off of the holder)
Rated current (I_{cw}) max 350 A
Rated short-time withstand current (I_{cw}) 1.0 sec. see table
Rated peak withstand current (I_{pk}) 0.1 sec. see table
Sultable for E-Cu busbars, unprocessed and blank

Continuous currents according to DIN 43671 for busbars made of E-Cu with.
Rectangular cross-section in indoor facilities at 25° C air temperaturearound the conductor and max. 65° C rail temperature. In case of parameter deviations.
Consider correction factors of DIN 43671.

Dimensions	Continuous current in A	Cross section	Weight
Cu busbars H x W (mm)	1 Cu busbar	in mm²	In kg/m
12 x 5	250	59.5	0.532
12 x 10	350	119.0	1.064

Short circuit withstand rating			
Cu busbars H x W (mm)	Busbar holder spacing max. (mm)	I_{cw}/kA	I_{pk}/kA
12 x 5	220	14.5	29.1
12 x 10	220	14.5	29.1

Distribution panel system CombiLine N

Technical specifications of the busbar holder ZX520

ZX520

Technical specifications		
Busbar holder ZX520		
Busbar system 3-Pole		
Busbar centre spacing	60 mm	100 mm
Cu busbars	up to 30 x 10 mm	up to 60 x 10 mm
Rated current (I_n)	max. 630 A	max. 1250 A
Rated short-time withstand current (I_{cw}) see table		
Rated peak withstand current (I_{pk}) see table		
Rated voltage U_e = 400 V		
Rated impulse withstand voltage U_{imp} = 6 kV		
To be used with busbars E-Cu, unprocessed and blank.		

Continuous currents according to DIN 43671 for busbars made of E-Cu with.
Rectangular cross-section in indoor facilities at 25° C air temperaturearound the conductor and max. 65° C rail temperature. In case of parameter deviations.
Consider correction factors of DIN 43671.

Dimensions	Rated current	Cross section	Weight
Cu busbars H x W (mm)	in A	in mm²	(kg)
30 x 10	630	299.0	2,661
40 x 10	850	399.0	3,551
40 x 10 50 x 10	1000	499.0	4,441
60 x 10	1250	599.0	5,331

Short circuit withstand rating							
Cu busbars H x W (mm)	Busbar holder spacing max. (mm)	1 PW I_{cw}/kA	I_{pk}/kA	2 PW I_{cw}/kA	I_{pk}/kA	3 PW I_{cw}/kA	I_{pk}/kA
30 x 10	100	35,0	75,0	30,0	63,0	25,0	52,9
40 x 10	100	35,0	75,0	35,0	75,0	25,0	52,9
50 x 10	100	35,0	75,0	35,0	75,0	25,0	52,9

> Dimensions (mm)

Distribution panel system CombiLine N

Technical specifications of the busbar holder ZX522

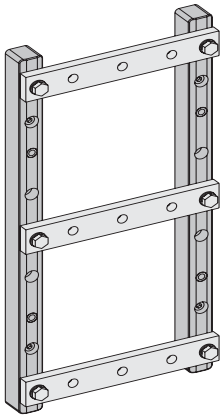

ZX522

Technical specifications		
Busbar holder ZX522		
3-Pole busbar system		
Busbar centre spacing	100 mm	185 mm
Cu busbars	up to 60 x 10 mm	up to 100 x 10 mm
Rated current (I_n)	max. 1450 A	max. 1700 A
Rated short-time withstand current (I_{cw}) see table		
Rated peak withstand current (I_{pk}) see table		
Rated voltage U_e = 400 V		
Rated impulse withstand voltage U_{imp} = 6 kV		
To be used with busbars E-Cu, unprocessed and blank.		

Continuous currents according to DIN 43671 for busbars made of E-Cu with. Rectangular cross-section in indoor facilities at 25° C air temperaturearound the conductor and max. 65° C rail temperature. In case of parameter deviations. Consider correction factors of DIN 43671.





Dimensions	Rated current	Cross section	Weight
Cu busbars H x W (mm)	in A	in mm²	(kg)
30 x 10	630	299.0	2.7
40 x 10	850	399.0	3.6
50 x 10	1000	499.0	4.4

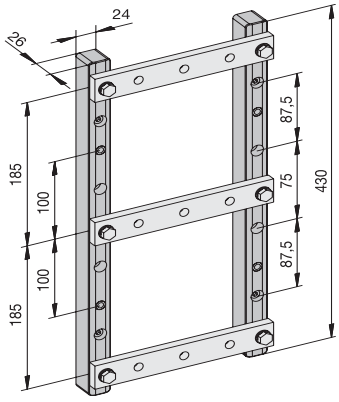

Short circuit withstand rating

Cu busbars H x W (mm)	Busbar holder spacing max. (mm)	1 PW I_{cw}/kA	I_{pk}/kA	2 PW I_{cw}/kA	I_{pk}/kA	3 PW I_{cw}/kA	I_{pk}/kA
30 x 10	100	35,0	75,0	30,0	63,0	25,0	52,9
	185	35,0	75,0	30,0	63,0	20,0	40,0
40 x 10	100	35,0	75,0	35,0	75,0	25,0	52,9
	185	35,0	75,0	35,0	75,0	25,0	52,0
50 x 10	100	35,0	75,0	35,0	75,0	25,0	52,9
	185	35,0	75,0	35,0	75,0	35,0	75,0

> Dimensions (mm)

Distribution panel system CombiLine N

Technical specifications of the busbar holder ZX563

ZX563

Technical specifications
N/PE busbar holder ZX563
Distance of the fixing holes 60 mm
Cu busbars 30 x 5 up to 60 x 10 mm
Rated current (I_n) max. 1250 A
Rated short-time withstand current (I_{cw}) see table
Rated peak withstand current (I_{pk}) see table
Rated voltage U_e = 400 V
Rated impulse withstand voltage U_{imp} = 8 kV
To be used with busbars E-Cu, unprocessed and blank.

Continuous currents according to DIN 43671 for busbars made of E-Cu with.
Rectangular cross-section in indoor facilities at 25° C air temperaturearound the conductor and max. 65° C rail temperature. In case of parameter deviations.
Consider correction factors of DIN 43671.



Dimensions	Rated current	Cross section	Weight
Cu busbars H x W (mm)	in A	in mm²	(kg)
30 x 10	630	299.0	2.7
40 x 10	850	399.0	3.6
50 x 10	1000	499.0	4.4



Short circuit withstand rating			
Cu busbars H x W (mm)	Busbar holder spacing max. (mm)	I_{cw}/kA	I_{pk}/kA
30 x 10	730	26.3	59.2
40 x 10	730	45.0	100.0
60 x 10	730	30.0	63.0

Distribution panel system CombiLine N

Technical specifications of the busbar holder ZX561

ZX561

Technical specifications
N/PE busbar holder type ZX561
Distance of the fixing holes 90 mm
Cu busbars 80 x 5 up to 100 x 10 mm
Rated current (I_n) max. 1700 A
Rated short-time withstand current (I_{cw}) 1.0 sec. see table
Rated peak withstand current (I_{pk}) 0.1 sec. see table
Sultable for E-Cu busbars, unprocessed and blank

Continuous currents according to DIN 43671 for busbars made of E-Cu with.
Rectangular cross-section in indoor facilities at 25° C air temperaturearound the conductor and max. 65° C rail temperature. In case of parameter deviations.
Consider correction factors of DIN 43671.



Dimensions	Rated current	Cross section	Weight
Cu busbars H x W (mm)	in A	in mm²	(kg)
80 x 10	1450	799.0	7.110
100 x 10	1700	999.0	8.890



Short circuit withstand rating			
Cu busbars H x W (mm)	Busbar holder spacing max. (mm)	I_{cw}/kA	I_{pk}/kA
80 x 10	730	45.0	100.0
100 x 10	730	45.0	100.0

Subdistribution boards

Fire protection housing – Housing for preventive fire protection

Preventive fire protection is not just the job of the construction managers. Electrical designers and installers or switchgear manufacturers are responsible during planning and execution for making sure that their systems will not the cause of a fire. In electrical switchgear, the following elements:

- Loose terminals
- Short circuits
- Fault arcs
- Overloads
- Insulation errors
- Lightning strikes

can cause a fire. Therefore, the system operator also needs to make the appropriate contribution by checking the electrical systems at fixed intervals, maintaining them and upgrading them as needed.

In the case of technical installations in industry or in building complexes with large concentrations of people, such as in airports, train stations, nursing homes, hospitals or hotels, it is vital that the functionality of safety-relevant electrical systems is maintained even during a fire.

ABB STRIEBEL & JOHN offers you an innovative housing system for preventive fire protection made of non-flammable material with optimal technical and economic expansion options.

A wide range of wall and standing housings are available in various cabinet sizes.

Subdistribution boards

Fire protection housing – General technical data

Technical parameters

Mounting type	UP wall mounting/AP wall mounting/AP standing mounting
Housing	Highly compressed, multi-layer fire protection panels (DIN 4102-1/DIN EN 13501-1) of building material class ‘A2’ non-flammable, smoke-tight
Surface	Coating light gray - similar to RAL 7035, edges in contrasting colors
Door	Door hinge right or left as standard, left also possible after conversion, opening angle approx. 180 degrees
Lock	Locking with sash lock through swivel handle with double bit half cylinder
Interior expansion	Prepared for installing distributor fields and CombiLine module system fields
Cable entries	Top and bottom
Standard ventilation	Ventilation in case of fire self-closing
Additional equipment	IP54, various decorative surfaces, reinforced back wall for free installation

Standards/regulations*

DIN EN 61439-2 (VDE 0660-600-2) (modules EDFmounting frame)	X
Protection class	IP41/IP44/IP54
Installation site/environment	Interior space
Ambient temperature, 24-hour average	+ 35°
Ambient temperature maximum value	+ 40 °
Ambient temperature minimum value	- 5°

Electrical characteristics

Rated impulse withstand voltage U_{imp}	III/6 kV
Pollution degree	3
Protection class	II
Rated surge current resistance I_{pk}	max. 17 kA
Rated short-time current I_{cw} 1.0 sec	max. 10 kA
Rated frequency	50-60 Hz
Rated insulating voltage U_i	690 V
Rated operating voltage AC U_e	400 V

Subdistribution boards

Fire protection housing – Standard features

Material/design
- Building material with surface – A2-s1, d0
- Fire resistance F30/F90
- Protection class depending on application, IP41, IP44 or IP54
- Smoke-tight
- Cold smoke-proof
- Wall thickness reduced to 72 mm.

Locking using the swivel handle
The doors have swivel levers in stainless steel look, which are located centrally and can be locked with double bit half cylinders.

Changeable door hinge
The door hinge is easy to change - to convert, unscrew the hinge from the door joint and screw it into the opposite joint. The door is fastened using the pre-drilled fixing holes in the door and the cabinet body. The door hinge is on the right as standard.

Stainless steel hinges
High-quality stainless steel hinges with a push-out axle pin allow for easy removal of the door. If necessary, significant weight reduction can thus be achieved for transport.

Mounting tabs
The flush-mounted wall housings are screwed from the outside with two mounting tabs attached to the head part, each with a dowel on the wall behind it. Therefore, the equipped housing can be easily and quickly mounted.

Integrated ventilation system
Consisting of fan and smoke detector, ready for connection (230 V AC), this reduces the area that can be fitted by one grid unit (GU).

Subdistribution boards

Fire protection housing – Standard features

Cable sheath
Cable sheaths for bundle or individual cable entry are located at the top and bottom of the housing.

Cable sheath (delivery condition)
The cable sheaths are standard in all wall and standing housings. This ensures quick and easy cable entry for every application.

Silicone seal
To increase the protection class to IP54, a full-perimeter silicone seal is needed for the cable entry points (see page 18/338).

- Empty housing, prepared for installing distributor fields and CombiLine module system fields each minus one raster unit per housing
- Doors are easy to remove - axle pin can be pushed out (reduced transport weight)
- Door opening angle 180 degrees
- Locking with rod lock, 2-point locking
- Color light gray - similar to RAL7035, with colored edges
- High chemical resistance (surface characteristics based on DIN EN 438-2)
- High mechanical strength and stability, Brinell hardness 50 N/mm^2
- High material density 1,450 kg/m^3
- Integrated ventilation system (area that can be fitted is reduced by one grid unit)

Subdistribution boards

Fire protection housing – Overview

Flush-mounted wall housing UF, IP41 ⧈

Housing depth 205 mm

Housing for flush mount

Surface-mount wall housing AF, IP44 ⧈

Housing depth 349 mm (internal depth 240 mm)

Housing for surface wall mounting

Standing housing SF, IP44 ⧈

Housing depth 349 mm (internal depth 240 mm)

Housing for standing installation

Subdistribution boards

Fire protection housing – Overview

Sheath housing MF, IP41

Housing for mounting using available distributors

Terminal boxes without terminal block KF, IP41 ⧈

Housing for wall or ceiling mounting

Mounting material for ceiling mounting available on request

Facing doors VF, IP54

Doors which are installed in front of existing flush-mounted distributors

Subdistribution boards

Fire protection housing – Additional equipment

Wall housing/standing housing when mounting or installing as freestanding unit

If installing as a free-standing unit, or in case of an extremely uneven wall, a BRW18 - BRW38 fire protection plate (42 mm thick) must be additionally screwed onto the back wall of the housing.

> The fire protection plate must be ordered separately, see page The fire protection plate must be ordered separately, see page 18/328

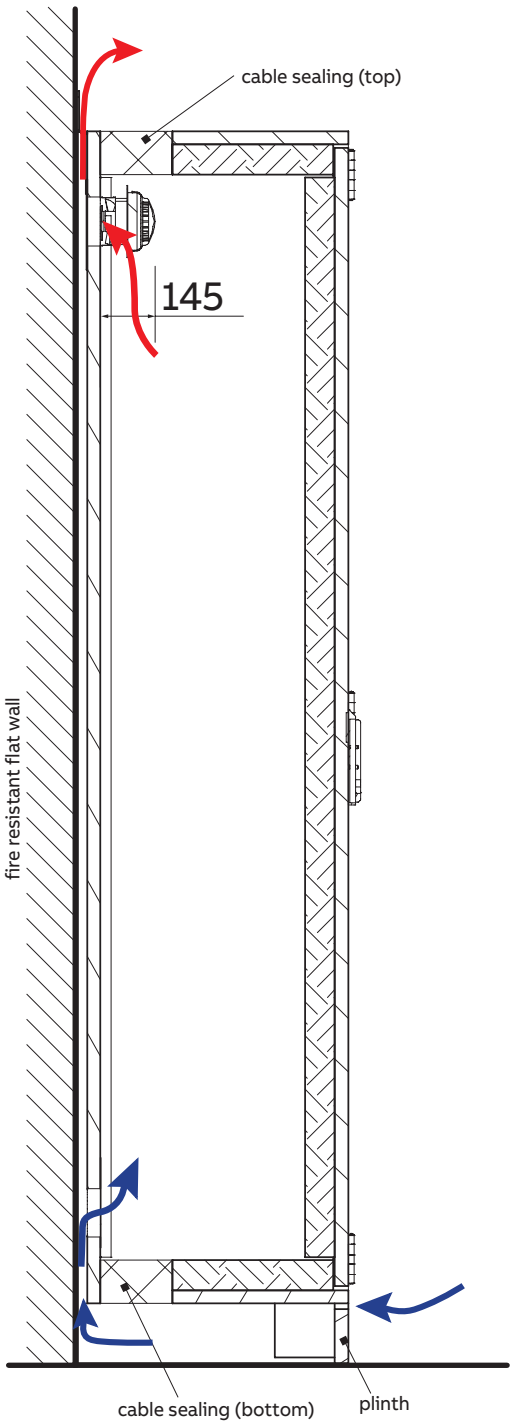

Schematic representation of ventilation in a standing housing

Subdistribution boards

Fire protection housing – Configuration example/mounting instructions

Configuration example: Surface-mount wall housing AF

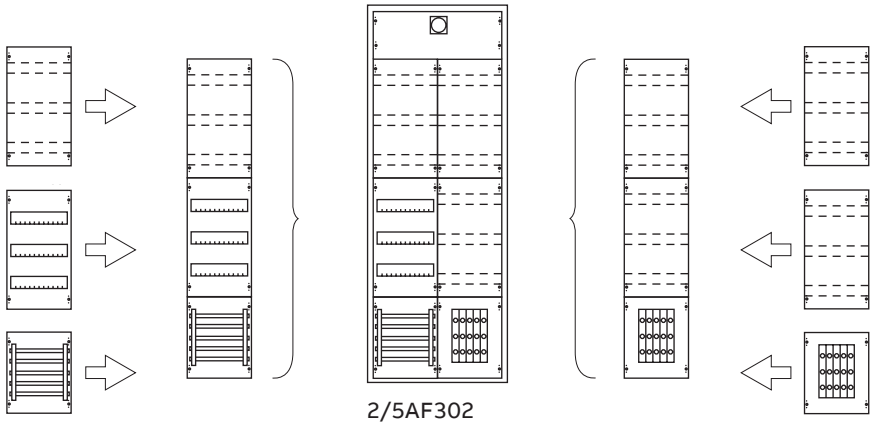

Configuration example: Standing housing SF

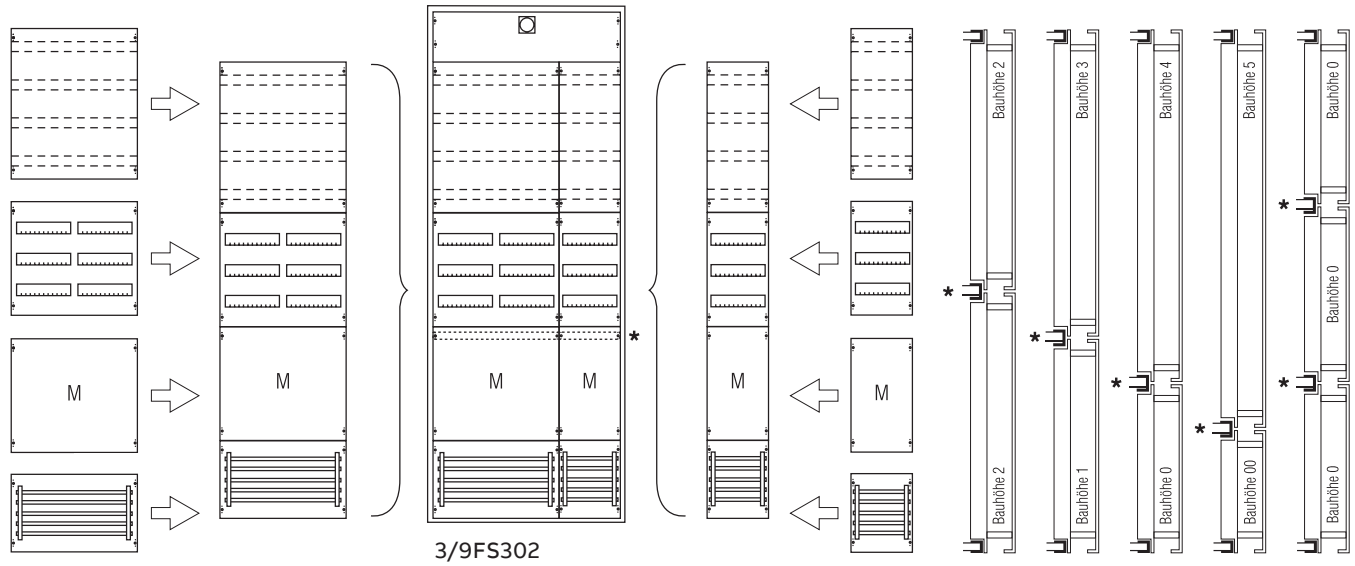

*Middle support rail adjustable up and down

Important notes

For flush-mounted, surface-mounted and standing housings, the mounting frames needed to hold the CombiLine modules or distributor panels are prefitted (for CombiLine modules and distributor fields/combination sets see chapter 8)
There is a fan in the upper part of the housing which occupies the space of one grid unit (1 GU). This space has a closed cover and is not available for the installation of CombiLine modules or distributor fields/combination sets.
When planning modular system fields for standing housings, the middle support rail, which extends over the entire width of the housing, must be taken into account (see configuration example Standing housing SF).

Subdistribution boards

Fire protection housing – Flush-mounted wall housing

Flush-mounted wall housing UF, IP41 ⧈
Housing depth 205 mm
Housing for flush mount

Main features

- Material with A2 surface coating - non-combustible, tested in accordance with DIN 4102-1
- Fire resistance F30/F90, tested in accordance with DIN 4102-2
- Protection type in accordance with IP41 ⧈ protection class II
- Smoke-tight, cold smoke-tight

Structure

- Flush mount (solid wall F30/F90)
- Prepared for installation of distributor fields
- Prepared for expansion with CombiLine modules on EDFmounting frame
- Changeable door hinge
- Door can be de-attached, thereby reducing weight
- Locking with sash lock using swivel handle with double bit half cylinder
- Cable entry at the bottom and top
- Door internal
- Opening angle 180 degrees

Surface

- Color light gray - similar to RAL 7035, with colored edges
- High chemical resistance
- High mechanical strength and stability

Additional equipment/options

- A variety of decorative surfaces

Subdistribution boards

Fire protection housing – Flush-mounted wall housing, IP41 ⧈, depth 205 mm

Overall height	Locking unit	Field width	Door hinge	Space units	External dimensions in mm			Weight in kg
Overall height	GU	PW		PLE	H × W × D	Type	Item number	
Flush-mounted wall housing, IP41 ⧈, depth 205 mm								
0	4	1	right	48	682 × 332 × 205	1/0UF2020	2CPX040008R9999	41
0	4	1	left	48	682 × 332 × 205	1/0UF2120	2CPX040009R9999	41
0	4	2	right	96	682 × 582 × 205	2/0UF2020	2CPX040020R9999	58
0	4	2	left	96	682 × 582 × 205	2/0UF2120	2CPX040021R9999	58
2	6	1	left	72	982 × 332 × 205	1/2UF2120	2CPX040029R9999	55
2	6	2	right	144	982 × 582 × 205	2/2UF2020	2CPX040040R9999	80
2	6	2	left	144	982 × 582 × 205	2/2UF2120	2CPX040041R9999	80

Flush-mounted wall housing, IP41 ⧈, depth 205 mm								
0	4	1	right	48	682 × 332 × 205	1/0UF2021	2CPX040052R9999	49
0	4	1	left	48	682 × 332 × 205	1/0UF2121	2CPX040053R9999	49
0	4	2	right	96	682 × 582 × 205	2/0UF2021	2CPX040064R9999	70
0	4	2	left	96	682 × 582 × 205	2/0UF2121	2CPX040065R9999	70
2	6	1	right	72	982 × 332 × 205	1/2UF2021	2CPX040076R9999	67
2	6	1	left	72	982 × 332 × 205	1/2UF2121	2CPX040077R9999	67
2	6	2	right	144	982 × 582 × 205	2/2UF2021	2CPX040088R9999	99
2	6	2	left	144	982 × 582 × 205	2/2UF2121	2CPX040089R9999	99

> For dimensions and weights, see pageFor dimensions and weights
> For CombiLine modules and distributor panels see chapter on interior expansion systems

Subdistribution boards

Fire protection housing – Surface-mount wall housing

Surface-mount wall housing AF, IP44 ⧈
Housing depth 349 mm
Housing for surface wall mounting

Main features

- Material with A2 surface coating - non-combustible, tested in accordance with DIN 4102-1/ EN 135 01-1
- Fire resistance F30/F90, tested in accordance with DIN 4102-2
- Protection type in accordance with IP44 ⧈ protection class II
- Smoke-tight, cold smoke-tight
- Ventilation system in the rear wall

Structure

- Wall mounting (solid wall F30/F90)
- Prepared for installation of distributor fields
- Prepared for expansion with CombiLine modules on EDFmounting frame
- Changeable door hinge on site, standard right
- Door can be de-attached, thereby reducing weight
- Locking with rod lock using swivel handle with double bit half cylinder
- Cable entry at the bottom and top
- Mounting tabs placed externally
- Door internal
- Opening angle 180 degrees

Surface

- Color light gray - similar to RAL 7035, with colored edges
- High chemical resistance
- High mechanical strength and stability

Subdistribution boards

Fire protection housing – Surface-mount housing, IP44 ⧈, depth 349 mm

Overall height	Locking unit	Field width	Space units	External dimensions in mm			Weight in kg
Overall height	GU	PW	PLE	H × W × D	Type	Item number	
Surface-mount housing, IP44 ⧈, depth 349 mm							
00	3	1	36	598 × 398 × 349	1/00AF302	2CPX043265R9999	51
00	3	2	72	598 × 648 × 349	2/00AF302	2CPX043266R9999	71
0	4	1	48	748 × 398 × 349	1/0AF302	2CPX043267R9999	62
0	4	2	96	748 × 648 × 349	2/0AF302	2CPX043268R9999	85
1	5	1	60	898 × 398 × 349	1/1AF302	2CPX043269R9999	73
1	5	2	120	898 × 648 × 349	2/1AF302	2CPX043270R9999	99
2	6	1	72	1048 × 398 × 349	1/2AF302	2CPX043271R9999	83
2	6	2	144	1048 × 648 × 349	2/2AF302	2CPX043272R9999	114
3	7	1	84	1198 × 398 × 349	1/3AF302	2CPX043274R9999	94
3	7	2	168	1198 × 648 × 349	2/3AF302	2CPX043275R9999	128
3	7	3	252	1198 × 898 × 349	3/3AF302	2CPX043276R9999	163
4	8	2	192	1348 × 648 × 349	2/4AF302	2CPX043278R9999	143
5	9	2	216	1498 × 648 × 349	2/5AF302	2CPX043281R9999	157

Surface-mount housing, IP44 ⧈, depth 349 mm							
0	3	1	36	598 × 398 × 349	1/00AF303	2CPX043380R9999	53
0	4	1	48	748 × 398 × 349	1/0AF303	2CPX043381R9999	64
0	4	2	96	748 × 648 × 349	2/0AF303	2CPX043382R9999	87
1	5	1	60	898 × 398 × 349	1/1AF303	2CPX043383R9999	75
1	5	2	120	898 × 648 × 349	2/1AF303	2CPX043384R9999	101
2	6	1	72	1048 × 398 × 349	1/2AF303	2CPX043385R9999	85
2	6	2	144	1048 × 648 × 349	2/2AF303	2CPX043386R9999	114
2	6	3	216	1048 × 898 × 349	3/2AF303	2CPX043387R9999	119
3	7	1	84	1198 × 398 × 349	1/3AF303	2CPX043388R9999	96
3	7	2	168	1198 × 648 × 349	2/3AF303	2CPX043389R9999	130
3	7	3	252	1198 × 898 × 349	3/3AF303	2CPX043390R9999	165

Important note
A cooling shutter is included for F90 fire resistance.
(For wall mounting housing a further cooling shutter could be necessary)

> For CombiLine modules and distributor panels see chapter on interior expansion systems

Subdistribution boards

Fire protection housing – Standing housing

Standing housing SF, IP44 ⧈
Housing depth 349 mm
Housing for standing installation

Main features

- Material with A2 surface coating - non-combustible, tested in accordance with DIN 4102-1/ EN 135 01-1
- Fire resistance F30/F90, tested in accordance with DIN 4102-2
- Protection type in accordance with IP44 ⧈ protection class II
- Smoke-tight, cold smoke-tight
- Ventilation system in the rear wall

Structure

- Freestanding installation
- Prepared for installation of distributor fields
- Prepared for expansion with CombiLine modules on EDFmounting frame
- Changeable door hinge, option of right or left
- Door can be de-attached, thereby reducing weight
- Locking with rod lock using swivel handle with double bit half cylinder
- Cable sheath for bundle entry or single entry
- Cable entry point, top and bottom
- Door internal
- Opening angle 180 degrees
- Base with removable front for pallet truck
- Ventilation system through the back wall of the housing

Surface

- Color light gray - similar to RAL 7035, with colored edges
- High chemical resistance
- High mechanical strength and stability

Important note

If installing as a free-standing unit, or in case of an extremely uneven wall, a fire protection plate (42 mm thick) must be additionally screwed onto the back wall of the housing
(see page 18/338)

Subdistribution boards

Fire protection housing – Standing housing, IP44 ⧈, depth 349 mm

Overall height	Locking unit	Field width	Door hinge	Space units	External dimensions in mm			Weight in kg
Overall height	GU	PW	(Standard)	PLE	H × W × D	Type	Item number	
Standing housing IP44 ⧈, depth 349 mm								
8	12	1	right	144	2048 × 398 × 349	1/8SF302	2CPX043290R9999	152
8	12	2	right	288	2048 × 648 × 349	2/8SF302	2CPX043292R9999	206
8	12	3	right	432	2048 × 898 × 349	3/8SF302	2CPX043294R9999	259
9	13	1	right	156	2198 × 398 × 349	1/9SF302	2CPX043304R9999	163
9	13	2	right	312	2198 × 648 × 349	2/9SF302	2CPX043306R9999	220
9	13	3	right	468	2198 × 898 × 349	3/9SF302	2CPX043308R9999	278

Standing housing IP44 ⧈, depth 349 mm								
8	12	1	right	144	2048 × 398 × 349	1/8SF303	2CPX043391R9999	154
8	12	2	right	288	2048 × 648 × 349	2/8SF303	2CPX043392R9999	208
8	12	3	right	432	2048 × 898 × 349	3/8SF303	2CPX043393R9999	261
9	13	1	right	156	2198 × 398 × 349	1/9SF303	2CPX043394R9999	165
9	13	2	right	312	2198 × 648 × 349	2/9SF303	2CPX043395R9999	222
9	13	3	right	468	2198 × 898 × 349	3/9SF303	2CPX043396R9999	280

Important note
A cooling shutter is included for F90 fire resistance.

> For standing housing dimensions and weights, see page For standing housing dimensions and weights
> For CombiLine modules and distributor panels see chapter on interior expansion systems

Subdistribution boards

Fire protection housing – Sheath housing

Sheath housing MF, IP41
Housing depth 312 mm
Housing for mounting using available distributors

Features

- Material with surface coating A2 – non combustible, tested according to DIN 4102 Part 1
- Fire resistance F30, tested according to DIN 4102 Part 2
- Reduce fire load for 30 minutes
- Standard surface CPL
- Impervious to smoke

Design

- Empty housing withour rear panel
- Changeable door hinge, optionally right or left
- Door can be removed
- Door opening angle: 180 degree
- Espagnolette closure locking using swivel handle with double-bit semi-cylinders
- Fire protection seal, self-foaming in case of fire
- Cable entry, top and bottom
- Cable cooling duct top an bottom, 100 mm heigth (EUL31) or 300mm height (EUL91)

Surface

- Light grey coating – similar to RAL 7035, edges of contrasting colour
- High chemical resistance
- High mechanical resistance and stability

Subdistribution boards

Fire protection housing – Sheath housing, IP41, depth 312 mm

Internal dimensions in mm	External dimensions in mm			
				Weight in kg
H × W × D	H × W × D	Type	Item number	
Sheath housing, IP41, depth 396 mm				
754 × 504 × 240	898 × 648 × 312	1/0MF302	2CPX043996R9999	95
904 × 504 × 240	1048 × 648 × 312	1/1MF302	2CPX043997R9999	105
904 × 754 × 240	1048 × 989 × 312	2/1MF302	2CPX043998R9999	132
1204 × 504 x240	1348 × 648 × 312	1/3MF302	2CPX043999R9999	126

Subdistribution boards

Fire protection housing – Accessories

Artikel		External dimensions in mm H × W × D	Type	Order code	Price	Weight in kg
BRW29	**Fire protection board** Back walls are delivered in OH9. For OH8 and for 30min enclosures, the back wall need to be adapted.					
	For 1/8SF and 19SF		BRW19	2CPX043434R9999		67
	For 2/8SF and 2/9SF		BRW29	2CPX043435R9999		110
	For 3/8SF and 3/9SF		BRW39	2CPX043436R9999		152
BKF21	**Cable cooling covers** Included within the delivery, an additional can be required if necessary.					
	1 panel width	300 x 398 x 200	BKF11	2CPX043431R9999		20
	2 panel width	300 x 648 x 200	BKF21	2CPX043432R9999		30
	3 panel width	300 x 898 x 200	BKF31	2CPX043433R9999		39
	Accessories supporting IP 54					
	Silicone for sealing the cable entries for protection class IP54		ZB900	2CPX042432R9999		

Subdistribution boards

Fire protection housing – Terminal boxes without terminal block

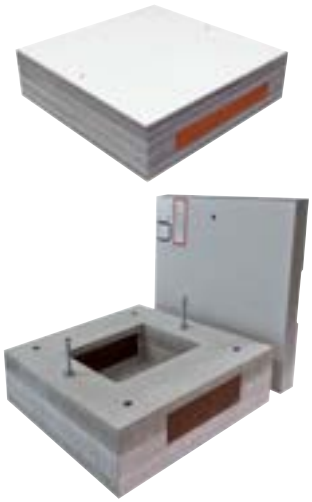

Terminal boxes without terminal block KF, IP41 ⧈
Housing for wall or ceiling mounting
Mounting material for ceiling mounting available on request

Main features

- Material with A2 surface coating - non-combustible, tested in accordance with DIN 4102-1
- Fire resistance F30/F90, tested in accordance with DIN 4102-2
- Protection class in accordance with IP41 ⧈
- Smoke-tight

Structure

- Mounting via 4 holes in the frame corners using the enclosed mounting material
- Mounting to wall or ceiling possible
- Cover screwed with two self-locking nuts
- Cover provided with a handle groove
- Cable entry points from 2 sides
- In case of fire, the cable sheath automatically foams up
- Easy mounting of the fixtures using pre-drilled holes
- Easy insertion and clamping of the cables thanks to a detachable frame plate system (layer structure)

Surface

- Color light gray - similar to RAL 7035, with colored edges
- High chemical resistance
- High mechanical strength and stability

Subdistribution boards

Fire protection housing – Terminal boxes without terminal block, IP41

Internal dimensions in mm	External dimensions in mm	Cable entry point				Weight in kg
H × W × D	H × W × D	W × H	Number	Type	Item number	
Terminal boxes without terminal block, IP41						
200 × 200 × 84	350 × 350 × 128	50 × 170	2	KF35140	2CPX041092R9999	17
300 × 300 × 84	450 × 450 × 128	50 × 270	2	KF45140	2CPX041093R9999	25
400 × 400 × 84	550 × 550 × 128	50 × 370	2	KF55140	2CPX041094R9999	34

Internal dimensions in mm	External dimensions in mm	Cable entry point				Weight in kg
H × W × D	H × W × D	W × H	Number	Type	Item number	
Terminal boxes without terminal block, IP41						
200 × 200 × 84	350 × 440 × 148	50 × 170	2	KF3590	2CPX043437R9999	17
300 × 300 × 84	450 × 540 × 148	50 × 270	2	KF4590	2CPX043438R9999	25
400 × 400 × 84	550 × 640 × 148	50 × 370	2	KF5590	2CPX043439R9999	34

Subdistribution boards

Fire protection housing – Facing doors

Facing doors VF IP54

- Fire-resistant and smoke-tight seals
- Panel material with surface coating - non-flammable
- Fire resistance 30 and 90 minutes
- Mounting on different wall constructions

Fire protectionfacing doors are intended for the separation of existing flush-mounted wall distributions from escape and rescue paths.

Subdistribution boards

Fire protection housing – Facing doors

In the standard version, the distributor may protrude 20 mm out of the wall at the most. Old doors should be de-attached and removed.
The facing door must be at least 115 mm above the existing distributor, i.e. this covering dimension plus the door thickness, due to the opening angle, must be maintained around the existing distributor.

If the current distributor protrudes more than 20 mm from the wall, an additional extension frame can be ordered for the facing door.

Tested material with surface coating DIN 4102 Part 1; material class A2

Integrated frame with mounting points

Removable stainless steel hinges

Fire and smoke protection seal all around

2-point locking using rod lock

Swivel handle in stainless steel look with double bit half-cylinder

Subdistribution boards

Fire protection housing – Facing doors

Facing doors VF, IP54
Door depth for 30 minutes 51 mm
Door depth for 90 minutes 71 mm
Door mounted in front of existing flush-mounted distributors

Function

- Material with A2 surface coating - non-combustible, tested in accordance with DIN 4102-1
- Fire resistance F30/F90, tested in accordance with DIN 4102-2
- Smoke-tight
- Protection class in accordance with IP54

Structure

- 1-wing door
- Door opening angle approx. 180 degrees with F30 version, approx. 150 degrees with F90 version
- Door hinge on right
- Surrounding wall compensating frame (W x D: 115 x 28 mm) with mounting holes
- Doors opening onto the frame
- Locking with swivel handle in metal look with DIN half cylinder
- 2-point locking with rod lock
- Stainless steel hinges with push-out axle pin for de-attaching the door wings
- Mounting material: Frame dowels, screws included in scope of delivery

Surface

- Color light gray - similar to RAL7035, with colored edges
- High chemical resistance
- High mechanical strength and stability, Brinell hardness 50 N/mm^2
- High material density 1,450 kg/m^3
- Surface characteristics based on DIN EN 438-2

Additional equipment/options

- Additional compensating frame for larger covers
- A variety of decorative surfaces
- Door hinge on left

Subdistribution boards

Fire protection housing – Facing doors, IP54, door depth 51 mm and 71 mm

Overall height	Field width	Door hinge	Internal dimensions in mm	External dimensions in mm			Weight in kg
Overall height	PW		H × W × D	H × W × D	Type	Item number	
Facing doors, IP54, door depth 51 mm							
0	1	right	665 × 345 × 0	895 × 575 × 51	1/0VF10	2CPX041048R9999	30
0	2	right	665 × 565 × 0	895 × 795 × 51	2/0VF10	2CPX041049R9999	37
1	2	right	815 × 565 × 0	1045 × 795 × 51	2/1VF10	2CPX041050R9999	42
1	3	right	815 × 815 × 0	1045 × 1045 × 51	3/1VF10	2CPX041051R9999	53
2	2	right	965 × 565 × 0	1195 × 795 × 51	2/2VF10	2CPX041052R9999	47
2	3	right	965 × 815 × 0	1195 × 1045 × 51	3/2VF10	2CPX041053R9999	60
2	4	Double door	965 × 1065 × 0	1195 × 1295 × 51	4/2VF20	2CPX041057R9999	72
3	2	right	1115 × 565 × 0	1345 × 795 × 51	2/3VF10	2CPX043397R9999	58
3	3	right	1115 × 815 × 0	1345 × 1045 × 51	3/3VF10	2CPX043398R9999	71
3	4	Double door	1115 × 1065 × 0	1345 × 1295 × 51	4/3VF20	2CPX041058R9999	80
4	2	right	1265 × 565 × 0	1495 × 795 × 51	2/4VF10	2CPX041054R9999	58
4	3	right	1265 × 815 × 0	1495 × 1045 × 51	3/4VF10	2CPX041055R9999	73
4	4	Double door	1265 × 1065 × 0	1495 × 1295 × 51	4/4VF20	2CPX041059R9999	88
5	2	right	1415 × 565 × 0	1645 × 795 × 51	2/5VF10	2CPX043399R9999	70
5	3	right	1415 × 815 × 0	1645 × 1045 × 51	3/5VF10	2CPX043400R9999	86
5	4	Double door	1415 × 1065 × 0	1645 × 1295 × 51	4/5VF20	2CPX043401R9999	107
8	2	right	1865 × 565 × 0	2095 × 795 × 51	2/8VF10	2CPX041056R9999	79
8	4	Double door	1865 × 1065 × 0	2095 × 1295 × 51	4/8VF20	2CPX041060R9999	119

Facing doors, IP54, door depth 71 mm							
0	1	right	665 × 345 × 22	895 × 575 × 71	1/0VF11	2CPX041061R9999	42
0	2	right	665 × 565 × 22	895 × 795 × 71	2/0VF11	2CPX041062R9999	58
1	2	right	815 × 565 × 22	1045 × 795 × 71	2/1VF11	2CPX041063R9999	67
1	3	right	815 × 815 × 22	1045 × 1045 × 71	3/1VF11	2CPX041064R9999	86
2	2	right	965 × 565 × 22	1195 × 795 × 71	2/2VF11	2CPX041065R9999	76
2	3	right	965 × 815 × 22	1195 × 1045 × 71	3/2VF11	2CPX041066R9999	97
2	4	Double door	965 × 1065 × 22	1195 × 1295 × 71	4/2VF21	2CPX041070R9999	118
3	1	right	1115 × 345 × 22	1345 × 575 × 71	1/3VF11	2CPX043402R9999	70
3	2	right	1115 × 565 × 22	1345 × 795 × 71	2/3VF11	2CPX043403R9999	90
3	3	right	1115 × 815 × 22	1345 × 1045 × 71	3/3VF11	2CPX043404R9999	113
3	4	Double door	1115 × 1065 × 22	1345 × 1295 × 71	4/3VF21	2CPX041071R9999	132
4	2	right	1265 × 565 × 22	1495 × 795 × 71	2/4VF11	2CPX041067R9999	94
4	3	right	1265 × 815 × 22	1495 × 1045 × 71	3/4VF11	2CPX041068R9999	120
4	4	Double door	1265 × 1065 × 22	1495 × 1295 × 71	4/4VF21	2CPX041072R9999	146
8	2	right	1865 × 565 × 22	2095 × 795 × 71	2/8VF11	2CPX041069R9999	129
8	4	Double door	1865 × 1065 × 22	2095 × 1295 × 71	4/8VF21	2CPX041073R9999	201

Important notes

Minimum internal dimension of facing doors = niche dimension of the flush-mounted wall box without flush-mounted frame

Facing door swings over the frame on the hinge side => leave at least 40 mm

Subdistribution boards

Fire protection housing – Extension frame for facing doors



2/2EF11

4/2EF21

Overall height	Field width	Internal dimensions in mm	External dimensions in mm			Weight in kg
Overall height	PW	H × W × D	H × W × D	Type	Item number	
Extension frame for 1-wing doors						
0	1	665 × 345 × 22	895 × 575 × 22	1/0EF11	2CPX041074R9999	10
0	2	665 × 565 × 22	895 × 795 × 22	2/0EF11	2CPX041075R9999	12
1	2	815 × 565 × 22	1045 × 795 × 22	2/1EF11	2CPX041076R9999	13
1	3	815 × 815 × 22	1045 × 1045 × 22	3/1EF11	2CPX041077R9999	15
2	2	965 × 565 × 22	1195 × 795 × 22	2/2EF11	2CPX041078R9999	14
2	3	965 × 815 × 22	1195 × 1045 × 22	3/2EF11	2CPX041079R9999	16
4	2	1265 × 565 × 22	1495 × 795 × 22	2/4EF11	2CPX041080R9999	17
4	3	1265 × 815 × 22	1495 × 1045 × 22	3/4EF11	2CPX041081R9999	19
8	2	1865 × 565 × 22	2095 × 795 × 22	2/8EVF1	2CPX041082R9999	22
Extension frame for 2-wing doors						
2	4	965 × 1065 × 22	1195 × 1295 × 22	4/2EF21	2CPX041083R9999	18
3	4	1115 × 1065 × 22	1345 × 1295 × 22	4/3EF21	2CPX041084R9999	20
4	4	1265 × 1065 × 22	1495 × 1295 × 22	4/4EF21	2CPX041085R9999	21
8	4	1865 × 1065 × 22	2095 × 1295 × 22	4/8EF21	2CPX041086R9999	26

Subdistribution boards

Flush-mounted wall housing – Dimensions, weights, power loss

Front view

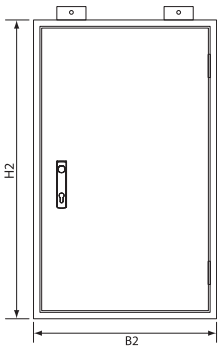

Internal view

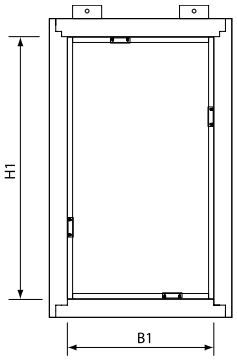

Top view



	Internal dimensions in mm	External dimensions in mm	Weight in kg	Permissible power dissipation (W) at 25 °C ambient temperature
Type	**H1 × W1 × D1**	**H2 × W2 × D2**		**W**
1/0UF2020	600 × 250 × 138	682 × 332 × 205	41	11
1/0UF2120	600 × 250 × 138	682 × 332 × 205	41	11
2/0UF2020	600 × 500 × 138	682 × 582 × 205	58	22
2/0UF2120	600 × 500 × 138	682 × 582 × 205	58	22
1/2UF2020	900 × 250 × 138	982 × 332 × 205	55	16
1/2UF2120	900 × 250 × 138	982 × 332 × 205	55	16
2/2UF2020	900 × 500 × 138	982 × 582 × 205	80	32
2/2UF2120	900 × 500 × 138	982 × 582 × 205	80	32

1/0UF2021	600 × 250 × 118	682 × 332 × 205	49	9
1/0UF2121	600 × 250 × 118	682 × 332 × 205	49	9
2/0UF2021	600 × 500 × 118	682 × 582 × 205	70	19
2/0UF2121	600 × 500 × 118	682 × 582 × 205	70	19
1/2UF2021	900 × 250 × 118	982 × 332 × 205	67	14
1/2UF2121	900 × 250 × 118	982 × 332 × 205	67	14
2/2UF2021	900 × 500 × 118	982 × 582 × 205	99	28
2/2UF2121	900 × 500 × 118	982 × 582 × 205	99	28

> Dimensions in mm

Subdistribution boards

Sheath housing/cooling shutters – Dimensions, weights, power loss

Front view

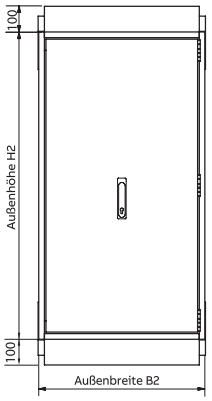

Internal view

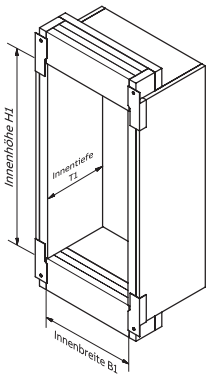

Side view



Top view



Type	Internal dimensions in mm H1 × W1 × D1	External dimensions in mm H2 × W2 × D2	Weight in kg	Permissible power dissipation (W) at 25 °C ambient temperature W
1/0MF302	754 x 504 x 240	898 x 648 x 312	95	27
1/1MF302	904 x 504 x 240	1048 x 648 x 312	105	31
2/1MF302	904 x 754 x 240	1048 x 989 x 312	132	41
1/3MF302	1204 x 504 x 240	1348 x 648 x 312	126	39

Cable sleeves
Top view

314 (BKF11)
548 (BKF21)
814 (BKF31)

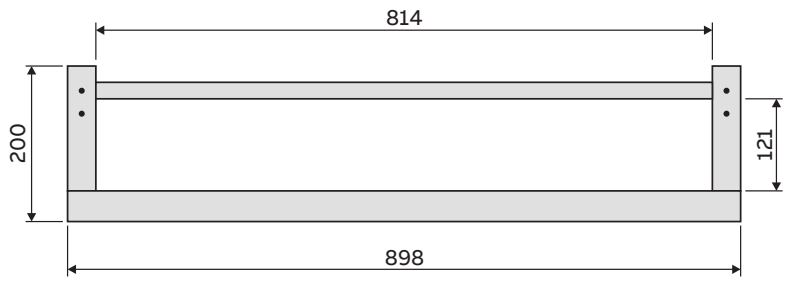

398 (BKF11)
648 (BKF21)
898 (BKF31)

Side view



> Dimensions in mm

Subdistribution boards

Surface-mount wall housing – Dimensions, weights, power loss

Front view

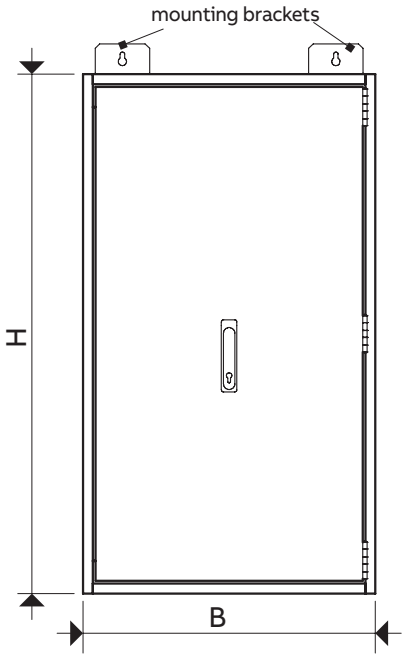

Internal view

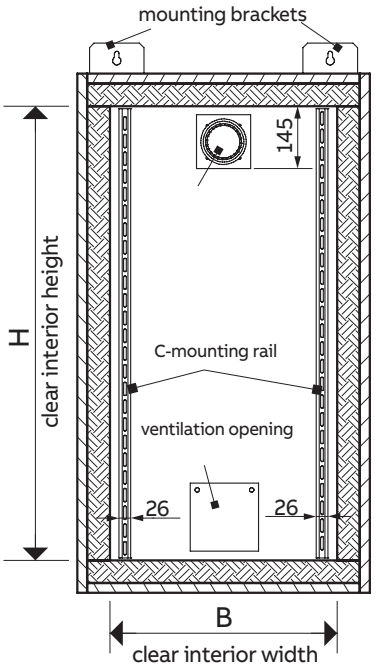

Side view

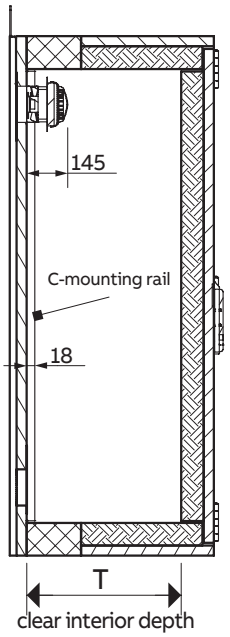

Top view

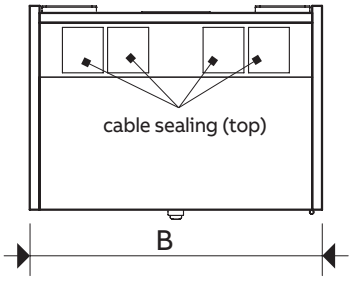





External depth of housing	349 mm
Internal depth of housing T1	240 mm
Usable internal depth T2	222 mm

> Dimensions in mm

Subdistribution boards

Surface-mount wall housing – Dimensions, weights, power loss

	External dimensions in mm	Internal dimensions in mm	Weight in kg	Power dissipation
Article	**H1 × W1 × D1**	**H2 × W2 × D2**		**Pv max. (W)**
1/00AF3 ...	598 × 398 × 349	454 × 254 × 240	51	171
2/00AF3 ...	598 × 648 × 349	454 × 504 × 240	71	185
1/0AF3 ...	748 × 398 × 349	604 × 254 × 240	62	177
2/0AF3 ...	748 × 648 × 349	604 × 504 × 240	85	195
1/1AF3 ...	898 × 398 × 349	754 × 254 × 240	73	182
2/1AF3 ...	898 × 648 × 349	754 × 504 × 240	99	205
1/2AF3 ...	1048 × 398 × 349	904 × 254 × 240	83	188
2/2AF3 ...	1048 × 648 × 349	904 × 504 × 240	114	214
1/3AF3 ...	1198 × 398 × 349	1054 × 254 × 240	94	194
2/3AF3 ...	1198 × 648 × 349	1054 × 504 × 240	128	224
3/3AF3 ...	1198 × 898 × 349	1054 × 754 × 240	163	253
2/4AF3 ...	1348 × 648 × 349	1204 × 504 × 240	143	233
2/5AF3 ...	1498 × 648 × 349	1354 × 504 × 240	157	243

Subdistribution boards

Standing housing – Dimensions, weights, power loss

Front view

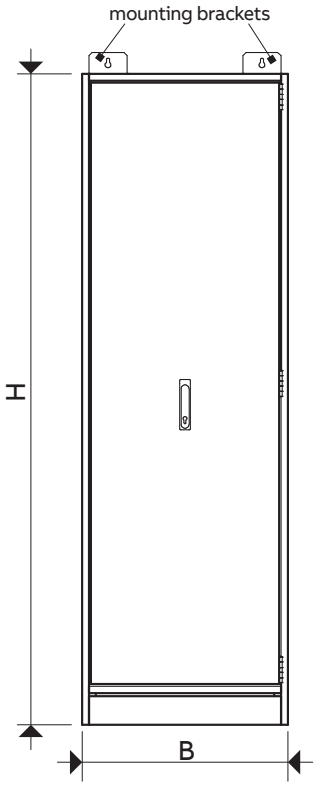

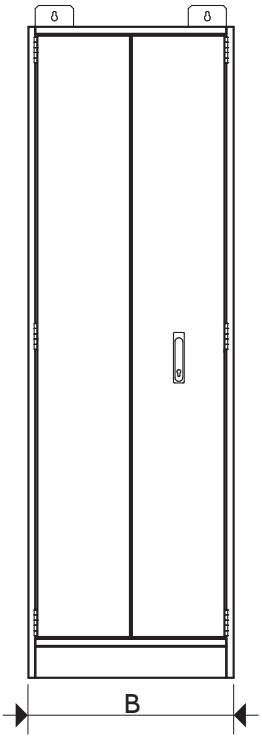

Internal view

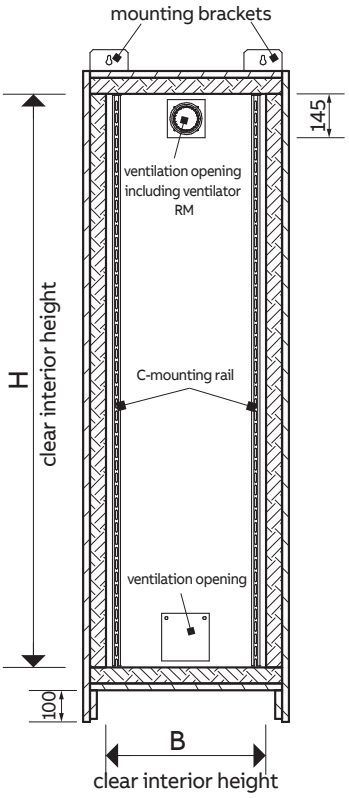

Side view

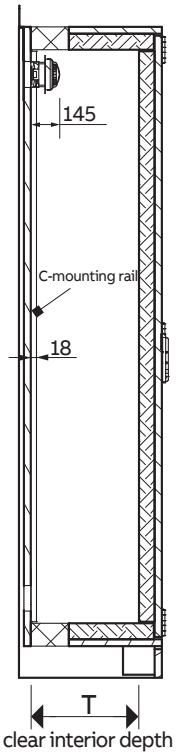

Top view







External depth of housing	349 mm
Internal depth of housing T1	240 mm
Usable internal depth T2	222 mm

> Dimensions in mm

Subdistribution boards

Standing housing – Dimensions, weights, power loss

	External dimensions in mm	Internal dimensions in mm	Weight in kg	Power dissipation
Type	**H1 × W1 × D1**	**H2 × W2 × D2**		**Pv max. (W)**
1/8SF3 ...	2048 × 398 × 349	1804 × 254 × 240	152	224
2/8SF3 ...	2048 × 648 × 349	1804 × 504 × 240	206	272
3/8SF3 ...	2048 × 898 × 349	1804 × 754 × 240	259	319
1/9SF3 ...	2198 × 398 × 349	1954 × 254 × 240	163	229
2/9SF3 ...	2198 × 648 × 349	1954 × 504 × 240	220	281
3/9SF3 ...	2198 × 898 × 349	1954 × 754 × 240	278	333

Subdistribution boards

Facing doors – Dimensions

Front view

Side view



Mounting frame

Top view

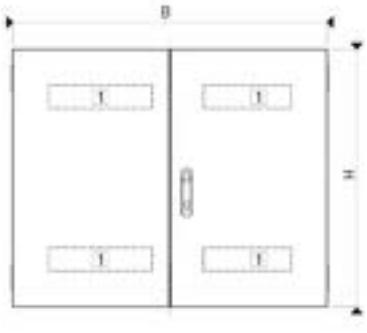

Front view

Side view

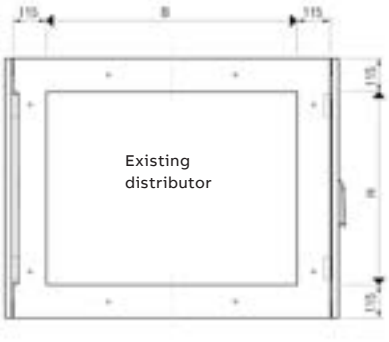

Mounting frame

Top view

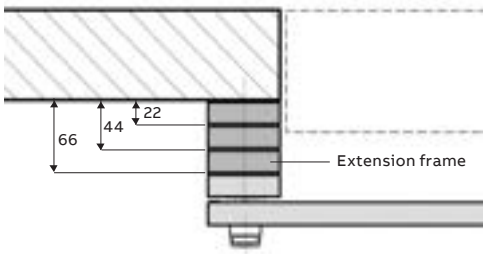

max. 3 additional extension frames (66 mm)

with 1-wing or 2-wing door

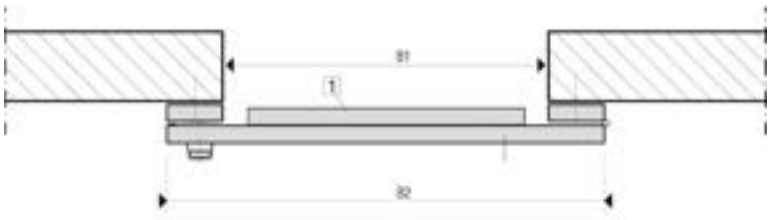

Facing door with mounting frame
Door swivels over the frame on the hinge side.
Leave at least 41/51 mm distance from the wall.

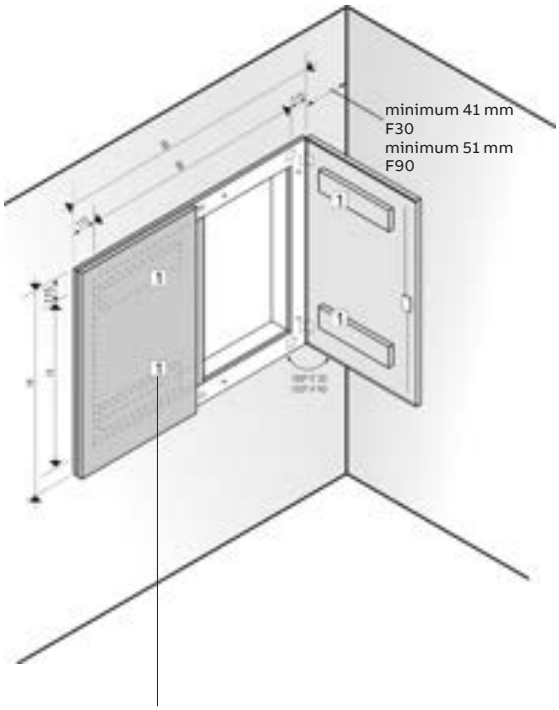

1 Bar above and below on the inside of the door, only for 30-minute design.

> Dimensions in mm

Subdistribution boards

Facing doors – Dimensions

	Internal dimensions in mm			External dimensions in mm		
Type	**H1**	**B1**	**D1**	**H2**	**W2**	**D2**
1/0VF10	665	345	0	895	575	51
2/0VF10	665	565	0	895	795	51
2/1VF10	815	565	0	1045	795	51
3/1VF10	815	815	0	1045	1045	51
2/2VF10	965	565	0	1195	795	51
3/2VF10	965	815	0	1195	1045	51
2/3VF10	1115	565	0	1345	795	51
3/3VF10	1115	815	0	1345	1045	51
2/4VF10	1265	565	0	1495	795	51
3/4VF10	1265	815	0	1495	1045	51
2/5VF10	1415	565	0	1645	795	51
3/5VF10	1415	815	0	1645	1045	51
2/8VF10	1865	565	0	2095	795	51
1/0VF11	665	345	22	895	545	71
2/0VF11	665	565	22	895	795	71
2/1VF11	815	565	22	1045	795	71
3/1VF11	815	815	22	1045	1045	71
2/2VF11	965	565	22	1195	795	71
3/2VF11	965	815	22	1195	1045	71
1/3VF11	1115	345	22	1345	575	71
2/3VF11	1115	565	22	1345	795	71
3/3VF11	1115	815	22	1345	1045	71
2/4VF11	1265	565	22	1495	795	71
3/4VF11	1265	815	22	1495	1045	71
2/8VF11	1865	565	22	2095	795	71
4/2VF20	965	1065	0	1195	1295	51
4/3VF20	1115	1065	0	1345	1295	51
4/4VF20	1265	1065	0	1495	1295	51
4/5VF20	1415	1065	0	1645	1295	51
4/8VF20	1865	1065	0	2095	1295	51
4/2VF21	965	1065	22	1195	1295	71
4/3VF21	1115	1065	22	1345	1295	71
4/4VF21	1265	1065	22	1495	1295	71
4/8VF21	1865	1065	22	2095	1295	71

Subdistribution boards

System pro E® energy
The complete cabinet system ...

The System pro E® energy range includes two types of cabinets and one internal configuration system.

System pro E® energy L
Tailored and proven wall

mounted and floor standing sub distribution boards up to 800 A.

Delivered in flat kits, System pro E® energy L provides a protection degree up to IP43 (IP30 without the door).

System pro E® energy M
Monoblock cabinet with attachable side panels, available in both configurations: wall mounted and floor standing.

System pro E® energy M sub distribution boards provide a protection degree up to IP55 (IP30 without the door).

System pro E® energy Combi
The common internal configuration

system facilitates the installation

of a wide range of ABB Low Voltage

devices based on its modular system, delivered in flat packs.

Subdistribution boards
System pro E® energy
Product benefits

Easy, Simple and Flexible

- Cabinets of 400, 600 and 800 mm width. The 800 mm wide cabinets can incorporate an integrated cable compartment.
- Heights available from 600 up to 2000 mm, always with a common depth of 250 mm, horizontal coupling of 2 or more cabinets possible
- Modular concept: all functional units in steps of 50mm in height
- The busbars can be assembled vertically or horizontally
- Only one type of tool is required for the assembly of the cabinets

Innovative cable entry and ease of installation
Several options provide the right solution for any kind of wiring application. System pro E® energy offers the options of cabinets with the top and bottom in different executions: plain with pre-knockouts for flanges, big opening.

The wide range of flange types provides the right solution for every application. The flanges can be attached without the need of tools. System pro E® energy offers unrestricted access during operation, expansion, maintenance and functional monitoring.

Plinth
The common plinth for System pro E® energy L and M has a height of 100 mm, and up to 3 of them can be stacked without any additional accessories.

The plinth consists of corner parts and lateral, front and back covers. Removing the front and back panels simplifies the panel's transportation and provides the required accessibility for the wiring in the final installation. The same applies to coupled cabinets, the removal of the internal lateral covers enables the cross-wiring between cabinets.

01

02

04

03

05

01 Complete range

02 Innovative cable entry

03 Easy assembly of plinth

04 Top and bottom cable entries

05 Easy assemble by one tool

Subdistribution boards
System pro E® energy
Product benefits

Quick to assemble

- Assembly can be done by a single person
- Tool-free snap-on system thanks to click-in supports for DIN-rails, mounting plates, busbar holders, etc.
- Pre-assembled handles with ¼ turn screws for cover plates
- System pro E® energy Combi provides a time-saving installation due to the hook-in technology. This quick assembly limits the numbers of screws.
- Guiding ledges in back panel for top and side panel fixation
- Generous wiring space, enough for vertical cable ducts of 80 mm width on each side
- Markings in the fixation profiles to quickly position the functional units and cover plates
- Frame allowing the removal of all cover plates at the same time
- Innovative flange technology with tool-free installation

Door ready to mount

- Common doors for System pro E® energy L and M
- Choose between plain and transparent doors for all cabinet widths
- PUR gasket to guarantee perfect closing and the protection degree
- 3 point locking system already mounted
- Easy and quick mounting without tools
- 130º opening angle
- Handle with several inserts available to adapt to the needs of each customer's individual requirements

01

04

02

05

03

01 Tool-free snap-on system thanks to click-in support / spring

02 Adjustable bracket

03 Removable cover

04 Pre-assembled cover locks with 1/4 turn lock.

05 Steel door and glass door ready for mounting

Subdistribution boards
System pro E® energy
Product benefits

Safe for users, reliable and sturdy

The combination of the System pro E® energy cabinets and ABB's low voltage devices are certified according to the standard IEC 61439-2

Protection degree against dust and liquids:

- System pro E® energy L: up to IP43
- System pro E® energy M: up to IP55

Strong mechanical construction

- Back panel galvanized sheet steel 1.5mm thick
- Internal corner parts to fasten the external panels, the frame of the cover plates and to execute the horizontal coupling of the cabinets
- Vertical profiles to fasten the mounting plates and isolator mounted at the back panel providing additional rigidity
- External panels sheet steel, powder coated
- Optional horizontal reinforcement for coupled cabinets
- Internal segregation up to Form 2b
- Tempered glass for the transparent door

—
01

—
02

—
01 Easy assembly from side-by-side

—
02 Internal corner part

Subdistribution boards

System pro E® energy L

System overview

Back and side panels



Top and Bottom

Plinth

Integrated cable compartment

Functional units

Busbars

Door

Cable flanges

Subdistribution boards

System pro E® energy L

System overview

Cabinets: Back panel + Side panels
- Back panel, sendzimir zinc plated steel 1.5 mm
- Side panels, epoxy-polyester coated sheet steel 1.2 mm
- 4 internal corner parts
- Profiles to fix the functional units (mounting plates, DIN rail, busbar isolators...)
- Frame to fix the cover plates
- Required hardware

Extensions: Back panel + coupling profiles
- Back panel, sendzimir zinc plated steel 1.5 mm
- 4 internal corner parts
- Profiles to fix the functional units (mounting plate, DIN rail, busbar isolators...)
- Frame to fix the cover plates
- Coupling profiles and accessories
- Required hardware

Top & Bottom
2 different options:
- With a wide opening to maximize the entry surface
- Plain with knock-outs for cable flanges

The kit includes 1 unit of the selected top and bottom, with all the required fixation hardware.
It's required to order 2 top & bottom per cabinet.

Plinth
- 100 mm height
- Stackable up to 3: 300 mm, without accessories
- Front, back and side covers removable
- Easy to fix
- Hardware to fix to the cabinet included

Integrated cable compartment
Possible to add an integrated cable compartment in the 800mm wide cabinets
- Profiles and cover plates to build the integrated cable compartment

Interior fitting: Modular distribution panel system
- Pre-assembled quick mounting system to fix the isolators for the busbars, DIN-rails, mounting plates, covers, etc. See chapter for System pro E® energy Combi (page 317)

Plain or transparent doors
- 3 point locking system already mounted
- PUR gasket to guarantee perfect closing and the protection degree
- 130° opening angle
- Swing handle for 1 400 mm and higher doors
- Wide range of accessories

Plastic or metal flanges
- Wide choice of cable flanges
- Metal flanges for wide cable opening

Subdistribution boards

System pro E® energy L

System overview

System pro E® energy L

Cabinet type		Cabinet: backpanel + side panels			Extension: Back panel + horizontal coupling		
Depth		250 mm			250 mm		
Width		400	600	800	400	600	800
Height	600	–	■	■	■	■	■
	800	–	■	■	■	■	■
	1 000	–	■	■	■	■	■
	1 200	–	■	■	■	■	■
	1 400	–	■	■	■	■	■
	1 600	–	■	■	■	■	■
	1 800	–	■	■	■	■	■
	2 000	–	■	■	■	■	■

> Dimensions in mm

Subdistribution boards

System pro E® energy L

Technical specifications and product features

Technical specifications	
Standards / requirements	IEC 61439 -1/-2 and IEC 62208
Protection Class	Class I, earthed
Pollution degree	2
Segregation	Form 1 and Form 2
Degree of protection	IP43
	Without door IP30
Mechanical impact Strength	IK 07- knock outs
	IK 08 - without door, transparent door
	IK 09 - plain door & side panels
Conditions of installation	Indoor installation
	Ambient air temperature max. +40 °C
	Ambient air temperature min. -5 °C
	Operating temperature max. +55 °C
	Storage temperature max. +55 °C
	Storage temperature min. -40 °C
Rated current (I_n)	up to 800 A
Rated operationa voltage (U_e)	415 V
Rated insulation voltage (U_i)	1 000 V
Rated short-circuit current (I_{cw})	32 kA/1s
Rated current of busbar systems	up to 800 A in IP43

Product features		
	Housing and door	Color RAL 7035
	Rear panel & mounting profiles	Sendzimir zinc plated steel 1.5 mm
	Side, top and bottom panel	Epoxy-polyester coated sheet steel 1.2 mm
	Plain door	Epoxy-polyester coated sheet steel 1.5 mm
	Transparent door	Epoxy-polyester coated sheet steel 1.5 mm and safety glass 3 mm thick
	Cover plates	Epoxy-polyester coated sheet steel 1 mm
	Door opening angle: 130°	
	Doors with espagnolette closure, 3 points locking system	
	Doors for wall-mounted cabinets: with latch plate and 3 mm double bit pin	
	Doors for floor-standing cabinets: with swing handle and 3 mm double bit pin	
Assembly options	Prepared to be fitted with System Pro E® energy Combi modules and mounting plates	
Forms of delivery	Flat kits	

Subdistribution boards

System pro E® energy L

Selection table for wall and floor version System IP43, flatpack

Width = 400 mm

Height	No. Mod. DIN H= 150 mm	No. Mod. DIN H= 200 mm	Dimension Internal H×W×D (mm)	Dimension External H×W×D (mm)	Order Code Basic	Order Code Extention
600	4 row (48 Mod)	3 row (36 Mod)	600×329×193	649×384×250	Q843B406	Q843E406
800	5 row (60 Mod)	4 row (48 Mod)	800×329×193	849×384×250	Q843B408	Q843E408
1000	6 row (72 Mod)	5 row (60 Mod)	100×329×193	1049×384×250	Q843B410	Q843E410
1200	8 row (96 Mod)	6 row (72 Mod)	1200×329×193	1249×384×250	Q843B412	Q843E412
1400	9 row (108 Mod)	7 row (84 Mod)	1400×329×193	1449×384×250	Q843B414	Q843E414
1600	10 row (120 Mod)	8 row (96 Mod)	1600×329×193	1649×384×250	Q843B416	Q843E416
1800	12 row (144 Mod)	9 row (108 Mod)	1800×329×193	1849×384×250	Q843B418	Q843E418
2000	13 row (156 Mod)	10 row (120 Mod)	2000×329×193	2049×384×250	Q843B420	Q843E420

Width = 600 mm

Height	No. Mod. DIN H= 150 mm	No. Mod. DIN H= 200 mm	Dimension Internal H×W×D (mm)	Dimension External H×W×D (mm)	Order Code Basic	Order Code Extention
600	4 row (96 Mod)	3 row (72 Mod)	600×545×193	649×600×250	Q843B606	Q843E606
800	5 row (120 Mod)	4 row (96 Mod)	800×545×193	849×600×250	Q843B608	Q843E608
1000	6 row (144 Mod)	5 row (120 Mod)	1000×545×193	1049×600×250	Q843B610	Q843E610
1200	8 row (192 Mod)	6 row (144 Mod)	1200×545×193	1249×600×250	Q843B612	Q843E612
1400	9 row (216 Mod)	7 row (168 Mod)	1400×545×193	1449×600×250	Q843B614	Q843E614
1600	10 row (240 Mod)	8 row (192 Mod)	1600×545×193	1649×600×250	Q843B616	Q843E616
1800	12 row (288 Mod)	9 row (216 Mod)	1800×545×193	1849×600×250	Q843B618	Q843E618
2000	13 row (312 Mod)	10 row (240 Mod)	2000×545×193	2049×600×250	Q843B620	Q843E620

Width = 800 mm

Height	No. Mod. DIN H= 150 mm	No. Mod. DIN H= 200 mm	Dimension Internal H×W×D (mm)	Dimension External H×W×D (mm)	Order Code Basic	Order Code Extention
600	4 row (144 Mod)	3 row (108 Mod)	600×761×193	649×816×250	Q843B806	Q843E806
800	5 row (180 Mod)	4 row (144 Mod)	800×761×193	849×816×250	Q843B808	Q843E808
1000	6 row (216 Mod)	5 row (180 Mod)	1000×761×193	1049×816×250	Q843B810	Q843E810
1200	8 row (288 Mod)	6 row (216 Mod)	1200×761×193	1249×816×250	Q843B812	Q843E812
1400	9 row (324 Mod)	7 row (252 Mod)	1400×761×193	1449×816×250	Q843B814	Q843E814
1600	10 row (360 Mod)	8 row (288 Mod)	1600×761×193	1649×816×250	Q843B816	Q843E816
1800	12 row (432 Mod)	9 row (324 Mod)	1800×761×193	1849×816×250	Q843B818	Q843E818
2000	13 row (468 Mod)	10 row (360 Mod)	2000×761×193	2049×8160×250	Q843B820	Q843E820

Subdistribution boards

System pro E® energy L

Selection table for wall and floor version System IP43, flatpack

Top/Bottom Flanges	Type of flanges	Top/Bottom with big openings	Type of covers for Big openings	Plinth	Metal door	Glass door	Internal cable compartment
Q843T411	Page 18/336 Flanges	Q843T421	Page 18/337 Flanges	Q855P401	Q855D406	Q855G406	
					Q855D408	Q855G408	
					Q855D410	Q855G410	
					Q855D412	Q855G412	
					Q855D414	Q855G414	
					Q855D416	Q855G416	
					Q855D418	Q855G418	
					Q855D420	Q855G420	

Top/Bottom Flanges	Type of flanges	Top/Bottom with big openings	Type of covers for Big openings	Plinth	Metal door	Glass door	Internal cable compartment
Q843T611	Page 18/336 Flanges	Q843T621	Page 18/337 Flanges	Q855P601	Q855D606	Q855G606	
					Q855D608	Q855G608	
					Q855D610	Q855G610	
					Q855D612	Q855G612	
					Q855D614	Q855G614	
					Q855D616	Q855G616	
					Q855D618	Q855G618	
					Q855D620	Q855G620	

Top/Bottom Flanges	Type of flanges	Top/Bottom with big openings	Type of covers for Big openings	Plinth	Metal door	Glass door	Internal cable compartment
Q843T811	Page 18/336 Flanges	Q843T821	Page 18/337 Flanges	Q855P801	Q855D806	Q855G806	Q830I206
					Q855D808	Q855G808	Q830I208
					Q855D810	Q855G810	Q830I210
					Q855D812	Q855G812	Q830I212
					Q855D814	Q855G814	Q830I214
					Q855D816	Q855G816	Q830I216
					Q855D818	Q855G818	Q830I218
					Q855D820	Q855G820	Q830I220

Subdistribution boards

System pro E® energy M

System overview

Monobloc cabinet + Side walls + Plinth + Integrated cable compartment + Functional units

Busbars + Door + Cable flanges

Subdistribution boards

System pro E® energy M

System overview

Cabinets: Monoblock
- open sides
- Top: openings for flanges (400 mm) or wide opening (600 & 800 mm)
- Bottom: plain with pre-knock outs for flanges
- Included the frame for the cover plates
- Cabinet can be rotated 180°

Side panels
- Delivered in 2 units.
- Only required 1 kit per panel (combination of several cabinets coupled horizontaly)

Integrated cable compartment
Possible to add an integrated cable compartment in the 800mm wide cabinets
- Profiles and coverplates to build the integrated cable compartment.

Interior fitting: functional units and busbars
Kits to fix the isolators for the busbars, the DIN rails, mounting plates...and the covers
See the chapter for System pro E® energy Combi

Plinth
- 100 mm height
- Stackable up to 3: 300 mm, without accessories
- Front, back and side covers removable
- Easy to fix
- Hardware to fix to the cabinet included

Door
Plain or transparent
- Same doors for IP43 and IP55 cabinets
- 3 points locking system already mounted and PUR gasket
- Mount without tools
- 130° opening angle
- Swing handle for 1 400 mm and higher doors
- Wide range of inserts as accessories

Flanges
Plastic or metal. Same for IP43 and IP55
- Several cable flanges.
- Metal flanges for wide cable opening

Subdistribution boards

System pro E® energy M

System overview

System pro E® energy M

Cabinet type		Cabinet: Monobloc enclosure with open sides		
Depth		250 mm		
Width		400	600	800
Height	600	■	■	■
	800	■	■	■
	1 000	■	■	■
	1 200	■	■	■
	1 400	■	■	■
	1 600	■	■	■
	1 800	■	■	■
	2 000	■	■	■

> Dimensions in mm

Subdistribution boards

System pro E® energy M

Technical specifications and product features

Technical specifications	
Standards / requirements	IEC 61439 -1/-2 and IEC 62208
Protection Class	Class I, earthed
Pollution degree	2
Segregation	Form 1 and Form 2
Degree of protection	IP55
	Without door IP30
Mechanical impact Strength	IK 07 - knock outs
	IK 08 - without door, transparent door
	IK 09 - plain door, side panels
Conditions of installation	Indoor installation
	Ambient air temperature max. +40 °C
	Ambient air temperature min. -5 °C
	Operating temperature max. +55 °C
	Storage temperature max. +55 °C
	Storage temperature min. -40 °C
Rated current (I_n)	up to 800 A
Rated operationa voltage (U_e)	415 V
Rated insulation voltage (U_i)	1 000 V
Rated short-circuit current (I_{cw})	32 kA/1s
Rated current of busbar systems	up to 800 A in IP43

Product features		
	Housing and door	Color RAL 7035
	Cabinet	Epoxy-polyester coated sheet steel 1.5 mm
	Plain door	Epoxy-polyester coated sheet steel 1.5 mm
	Side panels and top & bottom	Epoxy-polyester coated sheet steel 1.25 mm
	Transparent door	Epoxy-polyester coated sheet steel 1.5 mm and safety glass 3 mm thick
	Cover plates	Epoxy-polyester coated sheet steel 1 mm
	Door opening angle: 130°	
	Doors with espagnolette closure, 3 points locking system	
	Doors for wall-mounting cabinets: with latch plate and 3 mm double bit pin	
	Doors for floor-standing cabinets: with swing handle and 3 mm double bit pin	
Assembly options	Prepared to be fitted with System Pro E® energy Combi modules and mounting plates	
Forms of delivery	Monobloc enclosure with open sides	

Subdistribution boards

System pro E® energy M

Selection table for wall and floor version System IP55, Monoblock

Width = 390 mm

Height	No. Mod. DIN	No. Mod. DIN	Dimension Internal	Dimension External (without plinth)	Order Code	Order Code
	H= 150 mm	H= 200 mm	H×W×D (mm)	H×W×D (mm)	Basic	Side walls
600	4 row (48 Mod)	3 row (36 Mod)	600×329×193	649×396×250	Q855B406	Q855S006
800	5 row (60 Mod)	4 row (48 Mod)	800×329×193	849×396×250	Q855B408	Q855S008
1000	6 row (72 Mod)	5 row (60 Mod)	100×329×193	1049×396×250	Q855B410	Q855S010
1200	8 row (96 Mod)	6 row (72 Mod)	1200×329×193	1249×396×250	Q855B412	Q855S012
1400	9 row (108 Mod)	7 row (84 Mod)	1400×329×193	1449×396×250	Q855B414	Q855S014
1600	10 row (120 Mod)	8 row (96 Mod)	1600×329×193	1649×396×250	Q855B416	Q855S016
1800	12 row (144 Mod)	9 row (108 Mod)	1800×329×193	1849×396×250	Q855B418	Q855S018
2000	13 row (156 Mod)	10 row (120 Mod)	2000×329×193	2049×396×250	Q855B420	Q855S020

Width = 600 mm

Height	No. Mod. DIN	No. Mod. DIN	Dimension Internal	Dimension External (without plinth)	Order Code	Order Code
	H= 150 mm	H= 200 mm	H×W×D (mm)	H×W×D (mm)	Basic	Side walls
600	4 row (96 Mod)	3 row (72 Mod)	600×545×193	649×612×250	Q855B606	Q855S006
800	5 row (120 Mod)	4 row (96 Mod)	800×545×193	849×612×250	Q855B608	Q855S008
1000	6 row (144 Mod)	5 row (120 Mod)	1000×545×193	1049×612×250	Q855B610	Q855S010
1200	8 row (192 Mod)	6 row (144 Mod)	1200×545×193	1249×612×250	Q855B612	Q855S012
1400	9 row (216 Mod)	7 row (168 Mod)	1400×545×193	1449×612×250	Q855B614	Q855S014
1600	10 row (240 Mod)	8 row (192 Mod)	1600×545×193	1649×612×250	Q855B616	Q855S016
1800	12 row (288 Mod)	9 row (216 Mod)	1800×545×193	1849×612×250	Q855B618	Q855S018
2000	13 row (312 Mod)	10 row (240 Mod)	2000×545×193	2049×612×250	Q855B620	Q855S020

Width = 800 mm

Height	No. Mod. DIN	No. Mod. DIN	Dimension Internal	Dimension External (without plinth)	Order Code	Order Code
	H= 150 mm	H= 200 mm	H×W×D (mm)	H×W×D (mm)	Basic	Side walls
600	4 row (144 Mod)	3 row (108 Mod)	600×761×193	649×828×250	Q855B806	Q855S006
800	5 row (180 Mod)	4 row (144 Mod)	800×761×193	849×828×250	Q855B808	Q855S008
1000	6 row (216 Mod)	5 row (180 Mod)	1000×761×193	1049×828×250	Q855B810	Q855S010
1200	8 row (288 Mod)	6 row (216 Mod)	1200×761×193	1249×828×250	Q855B812	Q855S012
1400	9 row (324 Mod)	7 row (252 Mod)	1400×761×193	1449×828×250	Q855B814	Q855S014
1600	10 row (360 Mod)	8 row (288 Mod)	1600×761×193	1649×828×250	Q855B816	Q855S016
1800	12 row (432 Mod)	9 row (324 Mod)	1800×761×193	1849×828×250	Q855B818	Q855S018
2000	13 row (468 Mod)	10 row (360 Mod)	2000×761×193	2049×828×250	Q855D820	Q855S020

Subdistribution boards

System pro E® energy M

Selection table for wall and floor version System IP55, Monoblock

Coupling	Type of flanges	Type of flanges	Plinth	Metal door	Glass door	Internal cable compartment
Q855E00W Q855E00F	Page 18/336 Flanges	Page 18/337 Flanges	Q855P401	Q855D406	Q855G406	
				Q855D408	Q855G408	
				Q855D410	Q855G410	
				Q855D412	Q855G412	
				Q855D414	Q855G414	
				Q855D416	Q855G416	
				Q855D418	Q855G418	
				Q855D420	Q855G420	

Coupling	Type of flanges	Type of flanges	Plinth	Metal door	Glass door	Internal cable compartment
Q855E00W Q855E00F	Page 18/336 Flanges	Page 18/337 Flanges	Q855P601	Q855D606	Q855G606	
				Q855D608	Q855G608	
				Q855D610	Q855G610	
				Q855D612	Q855G612	
				Q855D614	Q855G614	
				Q855D616	Q855G616	
				Q855D618	Q855G618	
				Q855D620	Q855G620	

Coupling	Type of flanges	Type of flanges	Plinth	Metal door	Glass door	Internal cable compartment
Q855E00W Q855E00F	Page 18/336 Flanges	Page 18/337 Flanges	Q855P801	Q855D806	Q855G806	Q830I206
				Q855D808	Q855G808	Q830I208
				Q855D810	Q855G810	Q830I210
				Q855D812	Q855G812	Q830I212
				Q855D814	Q855G814	Q830I214
				Q855D816	Q855G816	Q830I216
				Q855D818	Q855G818	Q830I218
				Q855D820	Q855G820	Q830I220

Subdistribution boards

System pro E® energy L

Order codes

Cabinets: Back panel + Side panels

- Back panel
- Side panels
- 4 corner parts

profiles to fix the functional units (mounting plates, DIN rail, busbar isolators...

Cabinets: Back panel + side panels						
Width in mm	400		600		800	
Height in mm	Type code	Order code	Type code	Order code	Type code	Order code
600	Q843B406	1SZE430800B0010	Q843B606	1SZE430800B0090	Q843B806	1SZE430800B0170
800	Q843B408	1SZE430800B0020	Q843B608	1SZE430800B0100	Q843B808	1SZE430800B0180
1000	Q843B410	1SZE430800B0030	Q843B610	1SZE430800B0110	Q843B810	1SZE430800B0190
1200	Q843B412	1SZE430800B0040	Q843B612	1SZE430800B0120	Q843B812	1SZE430800B0200
1400	Q843B414	1SZE430800B0050	Q843B614	1SZE430800B0130	Q843B814	1SZE430800B0210
1600	Q843B416	1SZE430800B0060	Q843B616	1SZE430800B0140	Q843B816	1SZE430800B0220
1800	Q843B418	1SZE430800B0070	Q843B618	1SZE430800B0150	Q843B818	1SZE430800B0230
2000	Q843B420	1SZE430800B0080	Q843B620	1SZE430800B0160	Q843B820	1SZE430800B0240

Extensions: Back panel + coupling profiles

- Back panel
- 4 internal corner parts
- Profiles to fix the functional units (mounting plates, DIN rail, busbar isolators...)
- Coupling profiles and accessories

Extensions: Back panel + coupling						
Width in mm	400		600		800	
Height in mm	Type code	Order code	Type code	Order code	Type code	Order code
600	Q843E406	1SZE430801B0010	Q843E606	1SZE430801B0090	Q843E806	1SZE430801B0170
800	Q843E408	1SZE430801B0020	Q843E608	1SZE430801B0100	Q843E808	1SZE430801B0180
1000	Q843E410	1SZE430801B0030	Q843E610	1SZE430801B0110	Q843E810	1SZE430801B0190
1200	Q843E412	1SZE430801B0040	Q843E612	1SZE430801B0120	Q843E812	1SZE430801B0200
1400	Q843E414	1SZE430801B0050	Q843E614	1SZE430801B0130	Q843E814	1SZE430801B0210
1600	Q843E416	1SZE430801B0060	Q843E616	1SZE430801B0140	Q843E816	1SZE430801B0220
1800	Q843E418	1SZE430801B0070	Q843E618	1SZE430801B0150	Q843E818	1SZE430801B0230
2000	Q843E420	1SZE430801B0080	Q843E620	1SZE430801B0160	Q843E820	1SZE430801B0240

Top & Bottom

2 different options:

- Plain with knock-outs for cable flanges
- With a wide opening to maximize the entry surface

The kit includes 1 unit of the selected top and bottom, with all the required fixation hardware

It's required to order 2 top & bottom per cabinet

Top & Bottom									
Cabinet width, in mm	400			600			800		
	Type code	Order code	Units	Type code	Order code	Units	Type code	Order code	Units
Plain with pre-knock outs	Q843T411	1SZE430802B0010	1	Q843T611	1SZE430802B0011	1	Q843T811	1SZE430802B0012	1
BIG Entry space	Q843T421	1SZE430802B0013	1	Q843T621	1SZE430802B0014	1	Q843T821	1SZE430802B0015	1

Subdistribution boards

System pro E® energy M

Order codes

Cabinets: Monobloc enclosures with open sides

- Top: Open / Bottom: closed, pre-knock outs
- Included profiles to fix the functional units (mounting plate, DIN rail, busbar isolators...)
- Included profile to fix the cover plates
- The cabinet can be rotated 180°

Cabinets: Monobloc enclosures with open sides

Width in mm	400		600		800	
Height in mm	**Type code**	**Order code**	**Type code**	**Order code**	**Type code**	**Order code**
600	Q855B406	1SZE550800B0010	Q855B606	1SZE550800B0090	Q855B806	1SZE550800B0170
800	Q855B408	1SZE550800B0020	Q855B608	1SZE550800B0100	Q855B808	1SZE550800B0180
1000	Q855B410	1SZE550800B0030	Q855B610	1SZE550800B0110	Q855B810	1SZE550800B0190
1200	Q855B412	1SZE550800B0040	Q855B612	1SZE550800B0120	Q855B812	1SZE550800B0200
1400	Q855B414	1SZE550800B0050	Q855B614	1SZE550800B0130	Q855B814	1SZE550800B0210
1600	Q855B416	1SZE550800B0060	Q855B616	1SZE550800B0140	Q855B816	1SZE550800B0220
1800	Q855B418	1SZE550800B0070	Q855B618	1SZE550800B0150	Q855B818	1SZE550800B0230
2000	Q855B420	1SZE550800B0080	Q855B620	1SZE550800B0160	Q855B820	1SZE550800B0240

Side walls System pro E® energy M

- Set of 2 side walls
- Ready to be mounted
- Screws included

Side walls System pro E® energy M

Height in mm	Type code	Order code
600	Q855S006	1SZE550801B0010
800	Q855S008	1SZE550801B0020
1000	Q855S010	1SZE550801B0030
1200	Q855S012	1SZE550801B0040
1400	Q855S014	1SZE550801B0050
1600	Q855S016	1SZE550801B0060
1800	Q855S018	1SZE550801B0070
2000	Q855S020	1SZE550801B0080

Connection set for Side-by-Side connection IP55

- Brackets
- Gasket

Connection set for Side-by-Side connection IP55

Height in mm	Type code	Order code
600 - 1200 mm	Q855E00W	1SZE550800B0310
1400 - 2000 mm	Q855E00F	1SZE550800B0320

Subdistribution boards

System pro E® energy L/M

Order codes

Door

- Plain and transparent
- Same doors for IP43 and IP55 cabinets
- 3 points locking system for all the range
- Mount without tools
- 130° opening angle
- PUR gasket
- Swing handle for 1 400 mm and higher doors
- Wide range of insert as accessories

Doors plain

Width in mm		400		600		800
Cabinet height, in mm	**Type code**	**Order code**	**Type code**	**Order code**	**Type code**	**Order code**
600	Q855D406	1SZE990910B0010	Q855D606	1SZE990910B0090	Q855D806	1SZE990910B0170
800	Q855D408	1SZE990910B0020	Q855D608	1SZE990910B0100	Q855D808	1SZE990910B0180
1000	Q855D410	1SZE990910B0030	Q855D610	1SZE990910B0110	Q855D810	1SZE990910B0190
1200	Q855D412	1SZE990910B0040	Q855D612	1SZE990910B0120	Q855D812	1SZE990910B0200
1400	Q855D414	1SZE990910B0050	Q855D614	1SZE990910B0130	Q855D814	1SZE990910B0210
1600	Q855D416	1SZE990910B0060	Q855D616	1SZE990910B0140	Q855D816	1SZE990910B0220
1800	Q855D418	1SZE990910B0070	Q855D618	1SZE990910B0150	Q855D818	1SZE990910B0230
2000	Q855D420	1SZE990910B0080	Q855D620	1SZE990910B0160	Q855D820	1SZE990910B0240

Doors transparent

Width in mm		400		600		800
Cabinet height, in mm	**Type code**	**Order code**	**Type code**	**Order code**	**Type code**	**Order code**
600	Q855G406	1SZE990920B0010	Q855G606	1SZE990920B0090	Q855G806	1SZE990920B0170
800	Q855G408	1SZE990920B0020	Q855G608	1SZE990920B0100	Q855G808	1SZE990920B0180
1000	Q855G410	1SZE990920B0030	Q855G610	1SZE990920B0110	Q855G810	1SZE990920B0190
1200	Q855G412	1SZE990920B0040	Q855G612	1SZE990920B0120	Q855G812	1SZE990920B0200
1400	Q855G414	1SZE990920B0050	Q855G614	1SZE990920B0130	Q855G814	1SZE990920B0210
1600	Q855G416	1SZE990920B0060	Q855G616	1SZE990920B0140	Q855G816	1SZE990920B0220
1800	Q855G418	1SZE990920B0070	Q855G618	1SZE990920B0150	Q855G818	1SZE990920B0230
2000	Q855G420	1SZE990920B0080	Q855G620	1SZE990920B0160	Q855G820	1SZE990920B0240

Subdistribution boards

System pro E® energy L/M

Order codes

Integrated cable compartment

Possible to add an integrated cable compartment in the 800mm wide cabinets

- Profiles and cover plates to build the integrated cable compartment

Integrated cable compartment		
Width in mm		**800**
Height in mm	**Type code**	**Order code**
600	Q830I206	1SZE990930B0010
800	Q830I208	1SZE990930B0020
1000	Q830I210	1SZE990930B0030
1200	Q830I212	1SZE990930B0040
1400	Q830I214	1SZE990930B0050
1600	Q830I216	1SZE990930B0060
1800	Q830I218	1SZE990930B0070
2000	Q830I220	1SZE990930B0080

Standard Plinth

- 100 mm height
- Side cover fixed
- Front and back removable
- Hardware to fix to the cabinet included

Plinth						
Cabinet width in mm		**400**		**600**		**800**
	Type code	**Order code**	**Type code**	**Order code**	**Type code**	**Order code**
Plinth 100 mm height	Q855PS401	1SZE990940B0160	Q855PS601	1SZE990940B0170	Q855PS801	1SZE990940B0180

Stackable Plinth

- 100 mm height
- Stackable up to 3: 300 mm, without accessories
- Front, back and side covers removable
- Hardware to fix to the cabinet included

Plinth						
Cabinet width in mm		**400**		**600**		**800**
	Type code	**Order code**	**Type code**	**Order code**	**Type code**	**Order code**
Plinth 100 mm height	Q855P401	1SZE990940B0010	Q855P601	1SZE990940B0020	Q855P801	1SZE990940B0030

Subdistribution boards

System pro E® energy L/M

Flanges

TZ101



TZ110

TZ111

TZ102

TZ103

TZ112

TZ104

TZ105

TZ107

TZ106

Article	Unit	Type	Order code
Membrane flange Material plastic			
With 52 cable sleeves 2 x 6 - 32,5 mm, 2 x 6 - 25 mm, 4 x 6 - 19 mm, 10 x 6 - 15 mm, 2 x 6 - 12 mm, 31 x 6 - 11 mm, 1 x 6 - 7 mm	1	TZ101	2CPX010450R9999
	10	TZ101P10	2CPX010451R9999
	100	TZ101P100	2CPX010826R9999
With 8 membrane entries For cables sections 8 x 13 – 34 mm	1	TZ110	2CPX010850R9999
	10	TZ110P10	2CPX010934R9999
With 12 membrane entries and 1 cable sleeve entry For cable diameter 1 x 14 to 54 mm, 3 x 13 to 34 mm, 3 x 13 to 26,5 mm, 4 x 5 to 21 mm, 1 x 6 to 15 mm	1	TZ111	2CPX010851R9999
	10	TZ111P10	2CPX010935R9999
Flanges for M-screw joints Material plastic			
1 x M63/M50, 2 x M32/M20, 5 x M25, 5 x M20	1	TZ102	2CPX010452R9999
	10	TZ102P10	2CPX010453R9999
4 x M20/M25, 18 x M20	1	TZ103	2CPX010454R9999
	10	TZ103P10	2CPX010455R9999
Flanges with cable sleeves Material plastic			
With 1 cable sleeve For cable diameter 1 x 14 to 68 mm	1	TZ112	2CPX010852R9999
With 2 cable sleeve For cable diameter 2 x 14 to 68 mm	1	TZ104	2CPX010456R9999
	10	TZ104P10	2CPX010932R9999
With 3 cable sleeve For cable diameter 3 x 14 to 54 mm	1	TZ105	2CPX010457R9999
	10	TZ105P10	2CPX010933R9999
Locking flanges			
Material plastic	1	TZ107	2CPX010460R9999
	10	TZ107P10	2CPX010461R9999
Material steel sheet For earthed cabinets	1	TZ106	2CPX010458R9999
	10	TZ106P10	2CPX010459R9999

Subdistribution boards

System pro E® energy L/M

Flanges

Flange for wide cable entry fitting flanges (type TZ), closed with pre-punch-out

	Article	Order details		Price	Pcs.
		Type code	Order code		
	Flange for wide cable entry				
	Cabinet width:				
	400 mm	Q855F421	1SZE990900B0011		1
	600 mm	Q855F621	1SZE990900B0021		1
	800 mm	Q855F821	1SZE990900B0031		1

Q855F421

Plain flange for wide cable entry

	Article	Order details		Price	Pcs.
		Type code	Order code		
	Flange for wide cable entry				
	Cabinet width:				
	400 mm	Q855F422	1SZE990900B0012		1
	600 mm	Q855F622	1SZE990900B0022		1
	800 mm	Q855F822	1SZE990900B0032		1

Q855F422

Plain flange for wide cable entry with M20 pre-punch-outs

	Article	Order details		Price	Pcs.
		Type code	Order code		
	Flange for wide cable entry				
	Cabinet width:				
	400 mm	Q855F423	1SZE990900B0013		1
	600 mm	Q855F623	1SZE990900B0023		1
	800 mm	Q855F823	1SZE990900B0033		1

Q855F423

Plain flange for wide cable entry with M40 pre-punch-outs

	Article	Order details		Price	Pcs.
		Type code	Order code		
	Flange for wide cable entry				
	Cabinet width:				
	400 mm	Q855F424	1SZE990900B0014		1
	600 mm	Q855F624	1SZE990900B0024		1
	800 mm	Q855F824	1SZE990900B0034		1

Q855F424

Subdistribution boards

System pro E® energy L/M

Accessories

	Article	Order details		Price	Pcs.
		Type code	Order code		
	Swivel handle and operating pins				
ESAC1001	Swivel handle with double bit 3 mm*	ESAC1001	2CPX010900R9999		1
ESAC1002	Double bit 3 mm*	ESAC1002	2CPX010901R9999		1
	EK333 and key	ESAC1009	2CPX010908R9999		1
	Ronis 455 and key	ESAC1011	2CPX010910R9999		1
	Ronis 405 and key	ESAC1012	2CPX010911R9999		1
ESAC1009					
ESAC1011					
ESAC1012					
	Latch plates and operating pins				
TZ517	For operating pin 3 mm (standard)* and 5 mm	TZ517	2CPX010926R9999		1

* Accessory included in the scope of delivery

Subdistribution boards

System pro E® energy L/M

Lock replacement parts

	Article	Order details		Price	Pcs.
		Type code	Order code		
ESAC2008	**Espagnolette closure***				
	Espagnolette closure height 600 mm	ESAC2006	2CPX010914R9999		1
	Espagnolette closure height 800 mm	ESAC2008	2CPX010915R9999		1
	Espagnolette closure height 1000 mm	ESAC2010	2CPX010916R9999		1
	Espagnolette closure height 1200 mm	ESAC2012	2CPX010917R9999		1
	Espagnolette closure height 1400 mm	ESAC2014	2CPX010918R9999		1
	Espagnolette closure height 1600 mm	ESAC2016	2CPX010919R9999		1
	Espagnolette closure height 1800 mm	ESAC2018	2CPX010920R9999		1
	Espagnolette closure height 2000 mm	ESAC2020	2CPX010921R9999		1
TZ511	**Espagnolette guide***	TZ511	2CPX010495R9999		1
TZ501	**Shoe*** For espagnolette closure	TZ501	2CPX010485R9999		1

*Accessory included in the scope of delivery

Subdistribution boards

System pro E® energy L/M

General accessories

	Article	Order details		Price	Pcs.
		Type code	Order code		
Q800R00P2	**Mounting brackets package 2**	Q800R00P2	1SZE990940B0130		2
ESAC3003P4	**Transport lugs 4 pcs**	ESAC3003P4	2CPX078412R9999		4
	Door earthing set 6 mm² with 2x M6	QAW007000	1SZE990940B0120		1
	Cover earthing set Connection between interior fitting and structure 6 mm² with 2x M5	QAW007001	1SZE990940B0140		1
ZA6	**Document holder DIN A4** Self-adhesive with transparent sleeve and reinforced back	ZA6	2CPX038227R9999		1
		ZA6P10	2CPX062380R9999		10
	Self-adhesive with transparent sleeve	ZA61P10	2CPX062375R9999		10
ZA5	**Document holder DIN A4** Self-adhesive	ZA13	2CPX038233R9999		1
		ZA13P10	2CPX062381R9999		10
	Document holder DIN A5 Self-adhesive	ZA5	2CPX038228R9999		1
		ZA5P10	2CPX062382R9999		10
ZA123	**Document holder support plate**				
	For document holder ZA13, to screw on to the door strengthening profiles	ZA123	2CPX038471R9999		1
	For document holder ZA5, to screw on to the door strengthening profiles	ZA125	2CPX038472R9999		1

Subdistribution boards

System pro E® energy L/M

General accessories

	Article	Order details		Price	Pcs.
		Type code	Order code		
TZ650	**Cabinet Light (LED with movement detector); 230 V–24 V**	TZ650	2CPX010972R9999		1
TZ617P10	**Closingplug**	TZ617P10	2CPX010512R9999		10
ZL8	**Reinforcement coupled enclosures**				
	Cabinet width:				
	Reinf. c. enc. 600+400	Q800R6400	1SZE990940B0040		1
	Reinf. c. enc. 600+600/400+800	Q800R6600	1SZE990940B0050		1
	Reinf. c. enc. 600+400+600	Q800R6460	1SZE990940B0060		1
	Reinf. c. enc. 600+600+600/800+400+600	Q800R6660	1SZE990940B0070		1
	Reinf. c. enc. 800+600	Q800R8600	1SZE990940B0090		1
	Reinf. c. enc. 800+800	Q800R8800	1SZE990940B0100		1
	Reinf. c. enc. 800+400+800/600+600+800	Q800R8480	1SZE990940B0110		1
	Horizontal support for fixation of cables				
	Support horizontal fixation cables W400	QR4VBWS00	1SZE980120B0600		1
	Support horizontal fixation cables W600	QR6VBWS00	1SZE980120B0610		1
	Support horizontal fixation cables W800	QR8VBWS00	1SZE980120B0620		1

Subdistribution boards

System pro E® energy L/M

Spare parts

Side panels System pro E® energy L
Spare part for System pro E® energy L enclosures

		Order details			
	Height in mm	**Type code**	**Order code**	**Price**	**Pcs.**
	600	Q800SSW06	1SZE990940B0300		1
	800	Q800SSW08	1SZE990940B0301		1
	1000	Q800SSW10	1SZE990940B0302		1
	1200	Q800SSW12	1SZE990940B0303		1
	1400	Q800SSW14	1SZE990940B0304		1
	1600	Q800SSW16	1SZE990940B0305		1
	1800	Q800SSW18	1SZE990940B0306		1
Q800SSW...	2000	Q800SSW20	1SZE990940B0307		1

		Order details			
	Article	**Type code**	**Order code**	**Price**	**Pcs.**
Q800SCL01	External corner left	Q800SCL01	1SZE990940B0201		1
Q800SCR01	External corner right	Q800SCR01	1SZE990940B0202		1
Q800SCM01	Middle corner piece	Q800SCM01	1SZE990940B0203		1
Q800SCI01	Internal corner piece	Q800SCI01	1SZE990940B0204		1
Q800SDL10	Door hinge	Q800SDL10	1SZE990940B0323		1
Q800SCC10	Cover handle	Q800SCC10	1SZE990940B0321		1
Q843SCNP1	Cage nut, 10pcs	Q843SCNP1	1SZE990940B0210		10
Q843SSCP1	Screw M6x10 1000-277-1JB, 10pcs	Q843SSCP1	1SZE990940B0211		10

Notes

Subdistribution boards

System pro E® energy Combi - System overview

System pro E® energy L

System pro E® energy M

System pro E® energy Combi

Tmax breakers

OT breakers

DIN rail components

Standard covers

Covers for measuring instruments

Mounting plates

Internal form of separation

Busbar systems

Accessories

(The Right Module for every type of application)

Subdistribution boards

System pro E® energy Combi - Product benefits

One internal configuration system for all cabinets

All internal configuration and the busbar system for both systems (IP43 and IP55). The internal configuration up to 800 A.

Easy assembly / Spring mounting

- Assembly can be done by a single person
- Pre-assembled captive screws
- 1/4 turn screws for cover plates
- Click-in supports for functional units and busbar holders
- No tools needed
- Frame to remove all cover plates at once

Depth adjustable DIN-rail

DIN-rail can be adjusted in five depths:

- RCD, SPD, MCD S200
- MCB S750/S800
- XT1, XT3, ATS125
- terminal
- ATS-compact

Flexible in assembly, ease to combine

With its new mounting concept System pro E® combi provides more flexibility and access for installation and wiring. Placed horizontally on two trestles, makes the assembly and wiring very comfortable.



Subdistribution boards

System pro E® energy Combi

Product benefits

Easy cover handeling

Time-saving fixation and adjustment as well as the simple closure system with 1/4 turn quick-lock provides easy handling of the covers and standard earth connection. When using devices in the covers a safe earth connection is guaranteed through 6 mm² cable with ring shoes on both sides. The 90° opening angle of the hinge set ensures optimal accessibility.

Cabeling / wiring solution

The support for different dimensions of wiring ducts have the same level for horizontal and vertical usage. An additional profile for stabilization of wiring duct and for mounting wire holders is available.

KITS available for all XT-breakers

Modules for moulded case circuit breaker Tmax (XT1 - XT6), 3 and 4 pole versions, in horizontal and vertical position.

KITS for ATS, TruOne

Modules for automatic transfer switch (ATS), in vertical position up to 800 A.

Optimal accessibility and ease of installation

The removable frame as standard gives the possibility to remove all covers in one handling and provides quick access.

Form of internal seperation (up to 2b)

For the busbar sytem behind the device area is a horizontal transparent partition available. To separate the busbar system in external cable container it is possible to use a vertical separation.

Subdistribution boards

System pro E® energy Combi

Modules for moulded case circuit breaker Tmax, horizontal

QB3H62000

QB4H82000

Module for:

- Tmax breaker horizontal 3-/4-pole
- Unequipped set for ABB Tmax as an incoming or outgoing breaker

Content:

- Mounting plate of sheet steel with cut-outs (for fixed version with level operation with front Terminals)
- Support to fix to the rear panel profiles
- Cover plate with cut-outs (3-/4- Pole) breaker
- Cover plate with 1/4 turn quick-lock

	Type of device					Order details			
Width mm	Type code	I_n max A	Numbers of breakers	Numbers of poles	Height mm	Type code	Order code	Price	Pcs.
600	Tmax XT1	160	1	3/4	200	QB1H62000	1SZE980040B0330		1
	Tmax XT2	160	1	3/4	200	QB2H62000	1SZE980040B0340		1
	Tmax XT3	250	1	3/4	200	QB3H62000	1SZE980040B0350		1
	Tmax XT4	250	1	3/4	200	QB4H62000	1SZE980040B0360		1
	Tmax XT5	630	1	3/4	300	QB5H63000	1SZE980040B0370		1
	Tmax XT6	800	1	3/4	400	QB6H64000	1SZE980040B0380		1
800	Tmax XT1	160	1	3/4	200	QB1H82000	1SZE980040B0410		1
	Tmax XT2	160	1	3/4	200	QB2H82000	1SZE980040B0420		1
	Tmax XT3	250	1	3/4	200	QB3H82000	1SZE980040B0430		1
	Tmax XT4	250	1	3/4	200	QB4H82000	1SZE980040B0440		1
	Tmax XT5	630	1	3/4	300	QB5H83000	1SZE980040B0450		1
	Tmax XT6	800	1	3/4	400	QB6H84000	1SZE980040B0460		1

For 3 pole breakers please order accessory flange code AD3305 XT1 3P flange mounted on plate 1STQ009216A0000, AD3306 XT2 3P flange mounted on plate 1STQ009217A0000, AD3307 XT3 3P flange mounted on plate 1STQ009218A0000, AD3305 XT4 3P flange mounted on plate 1STQ009219A0000.

QB3H620RC

QB4H820RC

Module for:

- Tmax breaker horizontal 4-pole + RC
- Tmax breaker horizontal 4-pole XT3+ RC (B type)
- Unequipped set for ABB Tmax as an incoming or outgoing breaker

Content:

- Mounting plate made of sheet steel with cut-outs (for fixed version with level operation with front Terminals)
- Support to fix to the rear panel profiles
- Cover plates with cut-outs (for 4 pole breaker + RC) and 1/4 turn quick-lock

	Type of device					Order details			
Width mm	Type code	I_n max A	Numbers of breakers	Numbers of poles	Height mm	Type code	Order code	Price	Pcs.
600	Tmax XT1	160	1	4	200	QB1H620RC	1SZE980040B0690		1
	Tmax XT2	160	1	4	200	QB2H620RC	1SZE980040B0700		1
	Tmax XT3	250	1	4	200	QB3H620RC	1SZE980040B0710		1
	Tmax XT3	250	1	4	200	QB3H620RCB	1SZE980040B0870		1
	Tmax XT4	250	1	4	200	QB4H620RC	1SZE980040B0720		1
	Tmax XT5	630	1	4	300	QB5H630RC	1SZE980040B0730		1
	Tmax XT6	800	1	4	400	QB6H640RC	1SZE980040B0740		1
	Tmax T5	630	1	4	300	QB5H630TR	1SZE980040B0750		1
800	Tmax XT1	160	1	4	200	QB1H820RC	1SZE980040B0770		1
	Tmax XT2	160	1	4	200	QB2H820RC	1SZE980040B0780		1
	Tmax XT3	250	1	4	200	QB3H820RC	1SZE980040B0790		1
	Tmax XT3	250	1	4	200	QB3H820RCB	1SZE980040B0880		1
	Tmax XT4	250	1	4	200	QB4H820RC	1SZE980040B0800		1
	Tmax XT5	630	1	4	300	QB5H830RC	1SZE980040B0810		1
	Tmax XT6	800	1	4	400	QB6H840RC	1SZE980040B0820		1
	Tmax T5	630	1	4	300	QB5H830TR	1SZE980040B0830		1

Subdistribution boards

System pro E® energy Combi

Modules for moulded case circuit breaker Tmax, vertical

QB3V43000

QB5V84500

Module for:

- Tmax breaker vertical 3-/4-pole
- Unequipped set for ABB Tmax as an incomer or outgoing breaker

Content:

- Mounting plate of sheet steel with cut-outs (for fixed version with level operation with front Terminals)
- Support to fix to the rear panel profiles
- Cover plates with cut-outs and 1/4 turn quick-lock

	Type of device					Order details			
Width mm	Type code	I_n max A	Numbers of breakers	Numbers of poles	Height mm	Type code	Order code	Price	Pcs.
400	Tmax XT1	160	1	3/4	300	QB1V43000	1SZE980040B0010		1
	Tmax XT2	160	1	3/4	300	QB2V43000	1SZE980040B0020		1
	Tmax XT3	250	1	3/4	300	QB3V43000	1SZE980040B0030		1
	Tmax XT4	250	1	3/4	300	QB4V43000	1SZE980040B0040		1
	Tmax XT5	630	1	3/4	450	QB5V44500	1SZE980040B0050		1
600	Tmax XT1	160	1	3/4	300	QB1V63000	1SZE980040B0090		1
	Tmax XT2	160	1	3/4	300	QB2V63000	1SZE980040B0100		1
	Tmax XT3	250	1	3/4	300	QB3V63000	1SZE980040B0110		1
	Tmax XT4	250	1	3/4	300	QB4V63000	1SZE980040B0120		1
	Tmax XT5	630	1	3/4	450	QB5V64500	1SZE980040B0130		1
	Tmax XT6	800	1	3/4	450	QB6V64500	1SZE980040B0140		1
800	Tmax XT1	160	1	3/4	300	QB1V83000	1SZE980040B0170		1
	Tmax XT2	160	1	3/4	300	QB2V83000	1SZE980040B0180		1
	Tmax XT3	250	1	3/4	300	QB3V83000	1SZE980040B0190		1
	Tmax XT4	250	1	3/4	300	QB4V83000	1SZE980040B0200		1
	Tmax XT5	630	1	3/4	450	QB5V84500	1SZE980040B0210		1
	Tmax XT6	800	1	3/4	450	QB6V84500	1SZE980040B0220		1

For 3 pole breakers please order accessory flange code AD3305 XT1 3P flange mounted on plate 1STQ009216A0000, AD3306 XT2 3P flange mounted on plate 1STQ009217A0000, AD3307 XT3 3P flange mounted on plate 1STQ009218A0000, AD3305 XT4 3P flange mounted on plate 1STQ009219A0000.

Subdistribution boards

System pro E® energy Combi

Modules for moulded case circuit breaker Tmax + RC sel. vertical

QB4V435RC

QB5V845RC

Module for:

- Tmax breaker vertical 4-pole + RC sel.
- Tmax breaker vertical 4-pole XT3+ RC (B type)
- Unequipped set for ABB Tmax as an incomer or outgoing breaker

Content:

- Mounting plate of sheet steel with cut-outs (for fixed version with level operation with front Terminals)
- Support to fix to the rear panel profiles
- Cover plates with cut-outs (for 4 pole breaker + RC) and 1/4 turn quick-lock

	Type of device					Order details			
Width mm	Type code	I_n max A	Numbers of breakers	Numbers of poles	Height mm	Type code	Order code	Price	Pcs.
400	Tmax XT1	160	1	4	300	QB1V430RC	1SZE980040B0490		1
	Tmax XT2	160	1	4	350	QB2V435RC	1SZE980040B0500		1
	Tmax XT3	250	1	4	350	QB3V435RC	1SZE980040B0510		1
	Tmax XT3	250	1	4	350	QB3V435RCB	1SZE980040B0840		1
	Tmax XT4	250	1	4	350	QB4V435RC	1SZE980040B0520		1
	Tmax XT5	630	1	4	450	QB5V445RC	1SZE980040B0530		1
600	Tmax XT1	160	1	4	300	QB1V630RC	1SZE980040B0550		1
	Tmax XT2	160	1	4	350	QB2V635RC	1SZE980040B0560		1
	Tmax XT3	250	1	4	350	QB3V635RC	1SZE980040B0570		1
	Tmax XT3	250	1	4	350	QB3V635RCB	1SZE980040B0850		1
	Tmax XT4	250	1	4	350	QB4V635RC	1SZE980040B0580		1
	Tmax XT5	630	1	4	450	QB5V645RC	1SZE980040B0590		1
800	Tmax XT1	160	1	4	300	QB1V830RC	1SZE980040B0620		1
	Tmax XT2	160	1	4	350	QB2V835RC	1SZE980040B0630		1
	Tmax XT3	250	1	4	350	QB3V835RC	1SZE980040B0640		1
	Tmax XT3	250	1	4	350	QB3V835RCB	1SZE980040B0860		1
	Tmax XT4	250	1	4	350	QB4V835RC	1SZE980040B0650		1
	Tmax XT5	630	1	4	450	QB5V845RC	1SZE980040B0660		1

Subdistribution boards

System pro E® energy Combi

Modules for multiple moulded case circuit breaker Tmax, vertical

QB3V63003

QB3V83004

Module for:
- Multiple Tmax breaker vertical 3-/4-pole (side-by-side)
- Unequipped set for ABB Tmax as an incomer or outgoing breaker

Content:
- Mounting plate of sheet steel with cut-outs (for fixed version with level operation and front Terminals)
- Support to fix to the rear panel profiles
- Cover plate with cut-outs and 1/4 turn quick-lock

	Type of device					Order details			
Width mm	Type code	I_n max A	Numbers of breakers	Numbers of poles	Height mm	Type code	Order code	Price	Pcs.
600	Tmax XT1	160	3	3/4	300	QB1V63003	1SZE980040B0250		1
	Tmax XT2	160	3	3/4	300	QB2V63003	1SZE980040B0260		1
	Tmax XT3	250	3	3/4	300	QB3V63003	1SZE980040B0270		1
	Tmax XT4	250	3	3/4	300	QB4V63003	1SZE980040B0280		1
800	Tmax XT1	160	4	3/4	300	QB1V83004	1SZE980040B0290		1
	Tmax XT2	160	4	3/4	300	QB2V83004	1SZE980040B0300		1
	Tmax XT3	250	4	3/4	300	QB3V83004	1SZE980040B0310		1
	Tmax XT4	250	4	3/4	300	QB4V83004	1SZE980040B0320		1

For 3 pole breakers please order accessory flange code AD3305 XT1 3P flange mounted on plate 1STQ009216A0000, AD3306 XT2 3P flange mounted on plate 1STQ009217A0000, AD3307 XT3 3P flange mounted on plate 1STQ009218A0000, AD3305 XT4 3P flange mounted on plate 1STQ009219A0000.

QDS1B6300

Breaker module for:
- Unequipped module for XT1 and XT3 4 pole + RC sel.
- DIN rail adjustable
- Cover slotted
- Breaker positioned symmetrical behind the cover

Content:
- DIN rail is fixed on a mounting bracket
- DIN rail is double DIN, made of aluminium
- On the back-side it is possible to use Unifix L
- 1/4 turn quick-lock

Additional information						Order details			
Width mm	Height mm	I_n max A	Space units (SU)	DIN-rail distance	Numbers of rows	Type code	Order code	Price	Pcs.
600	300	250	24	300	1	QDS1B6300	1SZE980020B0170		1
800	300	250	36	300	1	QDS1B8300	1SZE980020B0180		1

Subdistribution boards

System pro E® energy Combi

Modules for switch disconnector OT, horizontal

QS4H63500

QS4H83500

Module for:

- Switch disconnector 3-/4-pole (horizontal)
- Unequipped set for ABB switch disconnector (OT...E03/04) as an incomer or outgoing switch

Content:

- Mounting plate of sheet steel with cut-outs and fixing points
- Support to fix to the rear panel profiles
- Cover plate with cut-outs for rotary handle in top of the center (Handle on one side of the switch)
- 1/4 turn quick-lock

Important:

- No possibility to use busbar system behind modules of OT630 and OT800

Width mm	Type of device				Height mm	Order details		Price	Pcs.
	Type code	I_n max A	Numbers of breakers	Numbers of poles		Type code	Order code		
400	OT200, OT250	400	1	3/4	350	QS4H43500	1SZE980050B0180		1
600	OT200, OT250 OT315, OT400	400	1	3/4	350	QS4H63500	1SZE980050B0010		1
	OT630, OT800	800	1	3/4	500	QS8H65000	1SZE980050B0020		1
800	OT200, OT250 OT315, OT400	400	1	3/4	350	QS4H83500	1SZE980050B0030		1
	OT630, OT800	800	1	3/4	500	QS8H85000	1SZE980050B0040		1

Subdistribution boards

System pro E® energy Combi

Modules for switch disconnector OT, vertical

QS4V435HL



QS4V635HL

QS4V835HL

Module for:
- Switch disconnector 3-/4-pole (vertical) handle left
- Unequipped set for ABB switch disconnector (OT...E03/04) as an incomer or outgoing switch

Content:
- Mounting plate of sheet steel with cut-outs and fixing points
- Support to fix to the rear panel profiles
- Cover plate with cut-outs for rotary handle left (Handle on one side of the switch)
- 1/4 turn quick-lock

Important:
- No possibility to use busbar system behind modules of OT630 and OT800

		For device				Order details			
Width mm	Height mm	I_n max A	Type code	Numbers of breakers	Numbers of poles	Type code	Order code	Price	Pcs.
400	350	400	OT200, OT250 OT315, OT400	1	3/4	QS4V435HL	1SZE980050B0050		1
600	350	400	OT200, OT250 OT315, OT400	1	3/4	QS4V635HL	1SZE980050B0060		1
	350	800	OT630, OT800	1	3/4	QS8V635HL	1SZE980050B0070		
800	350	400	OT200, OT250 OT315, OT400	1	3/4	QS4V835HL	1SZE980050B0080		1
	350	800	OT630, OT800	1	3/4	QS8V835HL	1SZE980050B0090		1

QS4V435HM



QS4V635HM

QS8V835HM

Module for:
- Switch disconnector 3-/4-pole (vertical) handle middle/center
- Unequipped set for ABB switch disconnector (OT...E21/E22) as an incommer or outgoing switch

Content:
- Mounting plate of sheet steel with cut-outs and fixing points
- Support to fix to the rear panel profiles
- Cover plate with cut-outs for rotary handle center
- 1/4 turn quick-lock

Important:
- No possibility to use busbar system behind modules of OT630 and OT800

		For device				Order details			
Width mm	Height mm	I_n max A	Type code	Numbers of breakers	Numbers of poles	Type code	Order code	Price	Pcs.
400	350	400	OT200, OT250 OT315, OT400	1	3/4	QS4V435HM	1SZE980050B0100		1
600	350	400	OT200, OT250 OT315, OT400	1	3/4	QS4V635HM	1SZE980050B0110		1
		800	OT630, OT800	1	3/4	QS8V635HM	1SZE980050B0120		
800	350	400	OT200, OT250 OT315, OT400	1	3/4	QS4V835HM	1SZE980050B0130		1
		800	OT630, OT800	1	3/4	QS8V835HM	1SZE980050B0140		1

Subdistribution boards

System pro E® energy Combi

Modules for automatic transfer switch (ATS), vertical

QL4V66000

QL4V86000

Module for:
- Automatic transfer switch 3-/4-pole (vertical)
- Unequipped set for ABB ATS (TruONE)

Content:
- Mounting plate made of sheet steel with cut-outs and fixing points
- Support to fix to the rear panel profiles
- Cover plate with cut-outs for programming port module
- 1/4 turn quick-lock

Important:
- No possibility to use busbar system behind modules

		For device				Order details			
Width mm	Height mm	I_n max A	Type code	Numbers of breakers	Numbers of poles	Type code	Order code	Price	Pcs.
600	600	400	OXB200, OXB250 OXB315, OXB400	1	3/4	QL4V66000	1SZE980050B0150		1
800	600	400	OXB200, OXB250 OXB315, OXB400	1	3/4	QL4V86000	1SZE980050B0160		1
		800	OXB500, OXB630, OXB800	1	3/4	QL8V86000	1SZE980050B0170		1

Modules for compact ATS

QL1V66000

Module for:
- Compact ATS 3-/4-pole
- Unequipped set for ATS compact

Content:
- Mounting plate made of sheet steel with cut-outs and fixing points
- Support to fix to the rear panel profiles
- Cover plate with cut-outs for programming port module
- 1/4 turn quick-lock

		For device				Order details			
Width mm	Height mm	I_n max A	Type code	Numbers of breakers	Numbers of poles	Type code	Order code	Price	Pcs.
600	200	125	OTM_C20D, OTM_C21D	1	3/4	QL1V66000	1SZE980050B0190		1
800	200	125	OTM_C20D, OTM_C21D	1	3/4	QL1V86000	1SZE980050B0200		1

Subdistribution boards

System pro E® energy Combi

Module with slotted covers + DIN-rail

QDS161500

Slotted covers for:
- DIN-rail components
- Rail distance 150 mm

Content:
- Slotted closed
- Unequipped module (Double DIN rail included)
- DIN rail fixed height
- 1/4 turn quick-lock

Additional information						Order details			
Width mm	Height mm	I_n max A	Space units (SU)	DIN-rail distance	Numbers of rows	Type code	Order code	Price	Pcs.
400	150	160	12	150	1	QDS141500	1SZE980020B0010		1
	200	160	12	150	1	QDS142000	1SZE980020B0020		1
	300	160	12	150	1	QDS143000	1SZE980020B0030		1
	300	160	12	150	2	QDS243000	1SZE980020B0040		1
600	150	160	24	150	1	QDS161500	1SZE980020B0050		1
	200	160	24	150	1	QDS162000	1SZE980020B0060		1
	300	160	24	150	1	QDS163000	1SZE980020B0070		1
	300	160	24	150	2	QDS263000	1SZE980020B0080		1
800	150	160	36	150	1	QDS181500	1SZE980020B0090		1
	200	160	36	150	1	QDS182000	1SZE980020B0100		1
	300	160	36	150	1	QDS183000	1SZE980020B0110		1
	300	160	36	150	2	QDS283000	1SZE980020B0120		1

QUS163000

DIN rail module for Unifix H:
- Unequipped module for Unifix H
- Fixed on a mounting bracket
- Rail distance 300 mm
- Unifix H not included

Content:
- Slotted cover
- 1/4 turn quick-lock

Additional information						Order details			
Width mm	Height mm	I_n max A	Space units (SU)	DIN-rail distance	Numbers of rows	Type code	Order code	Price	Pcs.
600	300	250	24	300	1	QUS163000	1SZE980020B0140		1
800	300	250	36	300	1	QUS183000	1SZE980020B0150		1

QDS16300A

DIN rail module for ATS Compact
- Unequiped module for ATS Compact (S750/S800/XT1/S200, SPD, OVR,..)
- Mounted on adjustable bracket
- Rail distance 300 mm
- Combination with Unifix L possible due to double DIN (Unifix not included)

Additional information				Order details			
Width mm	Height mm	Space units (SU)	DIN-rail distance	Type code	Order code	Price	Pcs.
600	300	24	300	QDS16300A	1SZE980020B0400		1
800	300	36	300	QDS18300A	1SZE980020B0410		1

Subdistribution boards

System pro E® energy Combi

Slotted covers

QCS141501

QCS263001

Slotted covers for:
- DIN-rail components
- Distance between slots 150 mm

Content:
- Slotted cover
- Unequipped cover (no DIN-rail included)
- 1/4 turn quick-lock

Important:
- DIN-rail needs to be ordered separately (see below)

Additional information						Order details			
Width mm	Height mm	I_n max A	Space units (SU)	DIN-rail distance	Numbers of rows	Type code	Order code	Price	Pcs.
400	150	160	12	150	1	QCS141501	1SZE980020B0190		1
	200	160	12	150	1	QCS142001	1SZE980010B0460		
	300	160	12	150	1	QCS143001	1SZE980020B0200		1
	300	160	12	150	2	QCS243001	1SZE980020B0210		1
600	150	160	24	150	1	QCS161501	1SZE980020B0240		1
	200	160	24	150	1	QCS162001	1SZE980010B0470		
	300	160	24	150	1	QCS163001	1SZE980020B0250		1
	300	160	24	150	2	QCS263001	1SZE980020B0260		1
800	150	160	36	150	1	QCS181501	1SZE980020B0290		1
	200	160	36	150	1	QCS182001	1SZE980010B0480		
	300	160	36	150	1	QCS183001	1SZE980020B0300		1
	300	160	36	150	2	QCS283001	1SZE980020B0310		1
Packaging									
400	150	160	12	150	1	QCS1415P1	1SZE980020B0340		10
	300	160	12	150	2	QCS2430P1	1SZE980020B0350		10
600	150	160	24	150	1	QCS1615P1	1SZE980020B0360		10
	300	160	24	150	2	QCS2630P1	1SZE980020B0370		10
800	150	160	36	150	1	QCS1815P1	1SZE980020B0380		10
	300	160	36	150	2	QCS2830P1	1SZE980020B0390		10

QT0283000

Covers for Terminals:
- Blind covers with DIN-rails
- DIN-rail (double DIN)

Content:
- Cover
- DIN rail (double DIN) mounted on the backplate

Additional information						Order details			
Width mm	Height mm	I_n max A	Space units (SU)	DIN-rail distance	Number of DIN-rails	Type code	Order code	Price	Pcs.
400	150			150	1	QT0141500	1SZE980030B0010		1
	200			200	1	QT0142000	1SZE980030B0020		1
	300			300	1	QT0143000	1SZE980030B0030		1
	300			150	2	QT0243000	1SZE980030B0040		1
600	150			150	1	QT0161500	1SZE980030B0050		1
	200			200	1	QT0162000	1SZE980030B0060		1
	300			300	1	QT0163000	1SZE980030B0070		1
	300			150	2	QT0263000	1SZE980030B0080		1
800	150			150	1	QT0181500	1SZE980030B0090		1
	200			200	1	QT0182000	1SZE980030B0100		1
	300			300	1	QT0183000	1SZE980030B0110		1
	300			150	2	QT0283000	1SZE980030B0120		1

Subdistribution boards

System pro E® energy Combi

DIN-rails

QAD001000

DIN-rail for Slotted covers:
- DIN rail (Double DIN)
- Delivered with fixed bracket

Content:
- Double DIN
- Bracket with support to fix to the rear Panel profile
- Unequipped DIN-rail for Pro-M products (S200, MCB, RCD, SPD, OVR,.. UNIFIX-L)
- DIN rail made of aluminium

Additional information				Order details			
Width mm	Quantity	I_n max A	Space units (SU)	Type code	Order code	Price	Pcs.
400	1		12	QAD001000	1SZE980150B0070		1
	10		12	QAD0010P1	1SZE980150B0100		10
600	1		24	QAD002000	1SZE980150B0080		1
	10		24	QAD0020P1	1SZE980150B0110		10
800	1		36	QAD003000	1SZE980150B0090		1
	10		36	QAD0030P1	1SZE980150B0120		10

QAD011000

DIN-rail for Slotted covers or closed covers:
- DIN rail (Double DIN)
- Delivered with adjustable bracket

Content:
- Double DIN (Unifix-L can be mounted)
- Bracket adjustable in 3 depths
- Bracket with support to fix to the rear Panel profile
- Unequipped DIN-rail for, System pro M S200, OT switch up to OT160 (front level) T-max (XT1, XT3) ATS125 (3-4 Pole) version (back level)
- Second and third level of bracket can be used for Terminals behind blind cover
- DIN rail made of aluminium

Additional information				Order details			
Width mm	Quantity	I_n max A	Space units (SU)	Type code	Order code	Price	Pcs.
400	1		12	QAD011000	1SZE980150B0130		1
	10		12	QAD0110P1	1SZE980150B0160		10
600	1		24	QAD012000	1SZE980150B0140		1
	10		24	QAD0120P1	1SZE980150B0170		10
800	1		36	QAD013000	1SZE980150B0150		1
	10		36	QAD0130P1	1SZE980150B0180		10



Article	Width in mm	Order details		Pcs.
		Type	Order code	
Depth adapters Enables the depth of miniature circuit-breakers to be adapted to that of moulded-case circuit-breakers mounted on the same DIN rail. Depth adapters for Tmax XT1-XT3	600	AP6000	1STQ008202A0000	1

Subdistribution boards

System pro E® energy Combi

DIN-rails

QAD031000

DIN-rail :
- DIN rail (Double DIN)
- Mounted on the back plate

Content:
- Double DIN
- Screws incl. for mounting on the back plate
- DIN rail made of aluminium

Additional information			Order details			
Width mm	I_n max A	Space units (SU)	Type code	Order code	Price	Pcs.
400		12	QAD031000	1SZE980150B0220		1
		12	QAD0310P1	1SZE980150B0250		10
600		24	QAD032000	1SZE980150B0230		1
		24	QAD0320P1	1SZE980150B0260		10
800		36	QAD033000	1SZE980150B0240		1
		36	QAD0330P1	1SZE980150B0270		10

Article	Use for...	Unit	Type	Order code
ED47	**Cover** As a view shutter for wire guidance in the wire holder ED44 and ED45, 1 m long	1	ED47	2CPX039309R9999
ZA1P5	**Blanking plates** For 12 space units, breakable Color RAL 7035	5	ZA1P5	2CPX062384R9999
		50	ZA1P50	2CPX062378R9999
	Running meter Color RAL 7035	1	ZA2	2CPX038231R9999
		20	ZA2P20	2CPX062379R9999

Subdistribution boards

System pro E® energy Combi

Closed covers

Content:
- Cover closed
- 1/4 turn quick-lock

Important:
- Height 500 mm and bigger have double 1/4 turn quick-lock

QCC043001

QCC064001

QCC086001

	Width mm	Height mm	Order details Type code	Order code	Price	Pcs.
	400	50	QCC040501	1SZE980010B0010		1
		100	QCC041001	1SZE980010B0020		1
		150	QCC041501	1SZE980010B0030		1
		200	QCC042001	1SZE980010B0040		1
		250	QCC042501	1SZE980010B0050		1
		300	QCC043001	1SZE980010B0060		1
		350	QCC043501	1SZE980010B0065		1
		400	QCC044001	1SZE980010B0070		1
		500	QCC045001	1SZE980010B0080		1
		600	QCC046001	1SZE980010B0090		1
		800	QCC048001	1SZE980010B0100		1
		900	QCC049001	1SZE980010B0110		1
	600	50	QCC060501	1SZE980010B0120		1
		100	QCC061001	1SZE980010B0130		1
		150	QCC061501	1SZE980010B0140		1
		200	QCC062001	1SZE980010B0150		1
		250	QCC062501	1SZE980010B0160		1
		300	QCC063001	1SZE980010B0170		1
		350	QCC063501	1SZE980010B0175		1
		400	QCC064001	1SZE980010B0180		1
		500	QCC065001	1SZE980010B0190		1
		600	QCC066001	1SZE980010B0200		1
		800	QCC068001	1SZE980010B0210		1
		900	QCC069001	1SZE980010B0220		1
	800	50	QCC080501	1SZE980010B0230		1
		100	QCC081001	1SZE980010B0240		1
		150	QCC081501	1SZE980010B0250		1
		200	QCC082001	1SZE980010B0260		1
		250	QCC082501	1SZE980010B0270		1
		300	QCC083001	1SZE980010B0280		1
		350	QCC083501	1SZE980010B0285		1
		400	QCC084001	1SZE980010B0290		1
		500	QCC085001	1SZE980010B0300		1
		600	QCC086001	1SZE980010B0310		1
		800	QCC088001	1SZE980010B0320		1
		900	QCC089001	1SZE980010B0330		1
Multi packaging						
	400	150	QCC0415P1	1SZE980010B0400		10
		200	QCC0420P1	1SZE980010B0410		10
	600	150	QCC0615P1	1SZE980010B0420		10
		200	QCC0620P1	1SZE980010B0430		10
	800	150	QCC0815P1	1SZE980010B0440		10
		200	QCC0820P1	1SZE980010B0450		10

Subdistribution boards

System pro E® energy Combi

Mounting plates

QM0403000

QM0609000

Mounting plates for:

- For fixing directly on the profile
- Distance between mounting plate and cover is 170 mm

Content:

- Mounting plate
- Support to fix to the rear panel profiles
- Cover plate not included

		Usable messurements				Order details			
Width mm	Height mm	Width mm	Height mm	Distance to covers mm	Distance to door mm	Type code	Order code	Price	Pcs.
400	300	146	269	172	56	QM0403000	1SZE980070B0010		1
600	150	362	139	172	56	QM0601500	1SZE980070B0020		1
	200	362	189	172	56	QM0602000	1SZE980070B0030		1
	250	362	239	172	56	QM0602500	1SZE980070B0040		1
	300	362	289	172	56	QM0603000	1SZE980070B0050		1
	400	362	389	172	56	QM0604000	1SZE980070B0060		1
	500	362	489	172	56	QM0605000	1SZE980070B0070		1
	600	362	589	172	56	QM0606000	1SZE980070B0080		1
	800	362	789	172	56	QM0608000	1SZE980070B0090		1
	900	362	889	172	56	QM0609000	1SZE980070B0100		1
	1000	362	989	172	56	QM0610000	1SZE980070B0110		1
800	150	578	139	172	56	QM0801500	1SZE980070B0130		1
	200	362	189	172	56	QM0802000	1SZE980070B0140		1
	250	362	239	172	56	QM0802500	1SZE980070B0150		1
	300	362	289	172	56	QM0803000	1SZE980070B0160		1
	400	362	389	172	56	QM0804000	1SZE980070B0170		1
	500	362	489	172	56	QM0805000	1SZE980070B0180		1
	600	362	589	172	56	QM0806000	1SZE980070B0190		1
	800	362	789	172	56	QM0808000	1SZE980070B0200		1
	900	362	889	172	56	QM0809000	1SZE980070B0210		1
	1000	362	989	172	56	QM0810000	1SZE980070B0220		1

Subdistribution boards

System pro E® energy Combi
Covers for SMISSLINE

QXEV46001

QXEV66001

Module for:
- SMISSLINE TP 125 A (Vertical)
- Unequipped set with SMISSLINE

Content:
- Ready for mounting of SMISSLINE TP 125 A
- Extention with DIN rails 35×15 mm
- A cable laying grid is included for cable fixing
- Support to fix to the rear panel profile

Width mm	Height mm	Order details Type code	Order code	Price	Pcs.
400	450	QXEV44501	1SZE980100B0010		1
	600	QXEV46001	1SZE980100B0030		1
	750	QXEV47501	1SZE980100B0040		1
600	450	QXEV64501	1SZE980100B0060		1
	600	QXEV66001	1SZE980100B0080		1
	750	QXEV67501	1SZE980100B0090		1
800	450	QXEV84501	1SZE980100B0210		1
	600	QXEV86001	1SZE980100B0230		1
	750	QXEV87501	1SZE980100B0240		1

QXEV66002

QXEV66002

Module for:
- SMISSLINE TP 250 A (Vertical)
- Unequipped set with SMISSLINE

Content:
- Ready for mounting of SMISSLINE TP 250 A
- Extention with DIN rails 35×15 mm
- A cable laying grid is included for cable fixing
- Support to fix to the rear panel profile

Width mm	Height mm	Order details Type code	Order code	Price	Pcs.
400	450	QXEV44502	1SZE980100B0110		1
	600	QXEV46002	1SZE980100B0130		1
	750	QXEV47502	1SZE980100B0140		1
600	450	QXEV64502	1SZE980100B0160		1
	600	QXEV66002	1SZE980100B0180		1
	750	QXEV67502	1SZE980100B0190		1
800	450	QXEV84502	1SZE980100B0260		1
	600	QXEV86002	1SZE980100B0280		1
	750	QXEV87502	1SZE980100B0290		1

Subdistribution boards

System pro E® energy Combi

Special covers

QCM761500

QCM961500

QCM961501

Covers for:

- Metering
- 72×72 mm or 96×96 mm

Content:

- Cover plate closed with 2 pre-punch-out (400 mm width)
- Cover plate closed with 4 pre-punch-outs (600 mm width)
- Cover plate closed with 6 pre-punch-outs (800 mm width)
- Unequipped module (Metering not included)
- 1/4 turn quick-lock closing

Additional information					Order details			
Width mm	Height mm	Space units (SU)	DIN-rail distance	Numbers of places	Type code	Order code	Price	Pcs.
400	150	72×72	150	2	QCM741500	1SZE980090B0010		1
600	150	72×72	150	4	QCM761500	1SZE980090B0030		1
800	150	72×72	150	6	QCM781500	1SZE980090B0050		1
400	150	96×96*	150	2	QCM941500	1SZE980090B0020		1
600	150	96×96	150	4	QCM961500	1SZE980090B0040		1
800	150	96×96	150	6	QCM981500	1SZE980090B0060		1
400	150	96×96	150	1	QCM941501	1SZE980090B0070		1
600	150	96×96	150	3	QCM961501	1SZE980090B0080		1
800	150	96×96	150	4	QCM981501	1SZE980090B0090		1

* M2M/M4M cannot be installed

QCP061000

Covers for:

- Push-buttons / Pilot devices
- Diameter 22.3 mm / 0.88"

Content:

- Cover plate closed with 5 pre-punch-outs (400 mm width)
- Cover plate closed with 10 pre-punch-outs (600 mm width)
- Cover plate closed with 15 pre-punch-outs (800 mm width)
- Unequipped module (Buttons/Pilote devices not included)
- 1/4 turn quick-lock closing

Additional information				Order details			
Width mm	Height mm	Diameter mm	Numbers of buttons	Type code	Order code	Price	Pcs.
400	100	22.3	5	QCP041000	1SZE980090B0110		1
600	100	22.3	10	QCP061000	1SZE980090B0111		1
800	100	22.3	15	QCP081000	1SZE980090B0112		1

		Order details			
		Type code	Order code	Price	Pcs.
 EV1135 EV1136	Plastic closing cover for instuments 72 x 72 mm	EV1135	1STQ001023A0000		1
	Plastic closing cover for instruments 96 x 96 mm	EV1136	1STQ001024A0000		1

Subdistribution boards

System pro E® energy Combi

Special covers

QXW061000

Cover for:

- The cable connection between module and switchgear cabinet door
- Cover with cut-out for the cable connection
- With DIN rail and connection sleeve
- With accessories to attach the sleeve to the module and to switchgear door
- Consider the door hinge position
- 1/4 turn quick-lock closing

Additional information		Order details			
Width mm	Height mm	Type code	Order code	Price	Pcs.
400	150	QXW041000	1SZE980110B0010		1
600	150	QXW061000	1SZE980110B0020		1
800	150	QXW081000	1SZE980110B0030		1

CAHCP10

- Hinge set for covers
- Opening angle 90 degrees
- 2 pcs. required per cover

	Order details			
	Type code	Order code	Price	Pcs.
	CAHCP10	2CPX078485R9999		10

Subdistribution boards

System pro E® energy Combi

Special covers France (dedicated only for France)

QJ4H620RC

Modules for solution:
- Tarif Jaune

Content:
- Mounting plate, double-insulated
- Cover plate
- Unequipped module (metering not insulated)
- 1/4 turn quick-lock closing

Tarif Jaune Vertical

	Device details				Order details			
Width mm	Type breaker	Current I_n	Pole	Height mm	Type code	Order code	Price	Pcs.
400	XT2+RC	160 A	4	350	QJ2V435RC	1SZE980090B0210		1
	XT4+RC	250 A	4	350	QJ4V435RC	1SZE980090B0220		1
	XT5+RC	400 A	4	450	QJ5V445RC	1SZE980090B0230		1
600	XT2+RC	160 A	4	350	QJ2V635RC	1SZE980090B0280		1
	XT4+RC	250 A	4	350	QJ4V635RC	1SZE980090B0290		1
	XT5+RC	400 A	4	400	QJ5V635RC	1SZE980090B0300		1

Tarif Jaune Horizontal

	Device details				Order details			
Width mm	Type breaker	Current I_n	Pole	Height mm	Type code	Order code	Price	Pcs.
600	OT200, OT250 OT315, OT400	400 A	4	350	QJ4H635HL	1SZE980090B0240		1
	XT2+RC	160 A		200	QJ2H620RC	1SZE980090B0250		1
	XT4+RC	250 A	4	200	QJ4H620RC	1SZE980090B0260		1
	XT5+RC	400 A	4	300	QJ5H630RC	1SZE980090B0270		1

Connection set for solution Tarif Jaune:
- Copper busbar connection set OT/XT

Content:
- 4 copper bars
- Unequipped

Connection set, busbar Tarif Jaune

Current		Order details			
I_n	Pole	Type code	Order code	Price	Pcs.
160 A	4	QJCU16000	1SZE980090B0510		1
250 A	4	QJCU25000	1SZE980090B0520		1
400 A	4	QJCU40000	1SZE980090B0530		1

Table for rated peak withstand current I_{pk}/rated short-time withstand current I_{cw} (1 sec.)

Cross-section	I_n in A	No. of busbars per phase	Max. distance between connection points (mm)	Max. distance between connection points (mm)	Max. distance between connection points (mm)
12×5	160	1	250	-	-
20×5	250	1	-	250	-
20×10	400	1	-	-	250

Subdistribution boards

System pro E® energy Combi

Special covers France (dedicated only for France)

QB3V46000

Moduls for solution:

- Tarif Blue

Content:

- Mounting plate, double-insulated
- Cover plate
- Unequipped module (metering not included)
- 1/4 turn quick-lock closing

QB1V63000

QB3V66000

Width mm	Height mm	Pole	Order details Type code	Order code	Price	Pcs.
400	600	3	QTB3V46000	1SZE980090B0310		1
400	300	1	QTB1V63000	1SZE980090B0330		1
	600	3	QTB3V66000	1SZE980090B0320		1

Subdistribution boards

System pro E® energy Combi

Busbar system vertical

Vertical busbar	Article	Width mm	Order details Type code	Order code	Price	Pcs.
QR6V6FF01	Busbar support Linear for flat busbar Behind the devices area Rated (I_n) max. 630 A Rated peak withstand current (I_{pk}) up to 67 kA Rated short-time withstand current (I_{cw}) 1.0 sec up to 32 kA To find the right numbers of support to achieve the short-circuit, see the table below. Code = 1 support with bracket	600 800	QR6V6FF01 QR6V8FF01	1SZE980120B0030 1SZE980120B0040		1 1
QR6V4FS01	Busbar support scaled for flat busbar External Cable container 400 mm width Rated (I_n) max. 630 A Rated peak withstand current (I_{pk}) up to 40 kA Rated short-time withstand current (I_{cw}) 1.0 sec up to 20 kA To find the right numbers of support to achieve the short-circuit, see the table below. Code = 1 support with bracket	400	QR6V4FS01	1SZE980120B0070		1
QR8V6SF01	Busbar support Linear for shaped busbar Behind the devices area Rated (I_n) max. 800 A Rated peak withstand current (I_{pk}) up to 67 kA Rated short-time withstand current (I_{cw}) 1.0 sec up to 32 kA To find the right numbers of support to achieve the short-circuit, see the table below. Code = 1 support with bracket	600 800	QR8V6SF01 QR8V8SF01	1SZE980120B0010 1SZE980120B0020		1 1
QR8V4SS01	Busbar support scaled for shaped busbar Internal and external cable containe 200/400 mm width Rated (I_n) max. 800 A Rated peak withstand current (I_{pk}) up to 67 kA Rated short-time withstand current (I_{cw}) 1.0 sec up to 32 kA To find the right numbers of support to achieve the short-circuit, see the table below. Code = 1 support with bracket	200/400	QR8V4SS01	1SZE980120B0060		1

Table for rated short-time withstand current I_{cw} (1 sec.)



The distance between the first busbar holder and the end of the busbar must not exceed 1/4 of "X"

Busbar Type	cross-section	I_n in A	Busbar support	No. of busbars per phase	Max. X (mm)	Max. X (mm)	Max. X (mm)	Max. X (mm)
Busbar support linear for flat busbar					17kA	20kA	23 kA	32kA
	20×5	250	QR6V6FF01 QR6V8FF01	1	350mm		-	-
	20×10	400		1	350mm		250mm	-
	30×10	630		1	350mm			
Busbar support scaled for flat busbar								
	20×5	250	QR6V4FS01	1	250mm	-	-	-
	20×10	400		1	250mm		-	-
	30×10	630		1	250mm		-	-
Busbar support linear for shaped busbar								
BA0400		400	QR8V6SF01 QR8V8SF01	1	400mm			-
BA0800		800		1	400mm			
Busbar support scaled for shaped busbars								
BA0400		400	QR8V4SS01	1	400mm			-
BA0800		800		1	350mm			

Subdistribution boards

System pro E® energy Combi

Busbar system horizontal

Horizontal busbar	Article	Width mm	Order details Type code	Order code	Price	Pcs.
QR6H6FS01	Busbar support scaled for flat busbar Module height 300 mm (cover needs to be ordered seperately) Rated (I_n) max. 630 A Rated peak withstand current (I_{pk}) up to 40 kA Rated short-time withstand current (I_{cw}) 1.0 sec up to 20 kA To find the right numbers of support to achieve the short-circuit. Code = 1 support with bracket	600	QR6H6FS01	1SZE980120B0120		1
		800	QR6H8FS01	1SZE980120B0130		1
QR8V4SS01	Busbar support scaled for shaped busbar Module height 300 mm (cover needs to be ordered seperately) Rated (I_n) max. 800 A Rated peak withstand current (I_{pk}) up to 67 kA Rated short-time withstand current (I_{cw}) 1.0 sec up to 32 kA To find the right numbers of support to achieve the short-circuit. Code = 1 support with bracket	600	QR8H6SS01	1SZE980120B0090		1
		800	QR8H8SS01	1SZE980120B0100		1

Table for rated short-time withstand current I_{cw} (1 sec.)



The distance between the first busbar holder and the end of the busbar must not exceed 1/4 of "X"

Busbar Type	cross-section	I_n in A	Busbar support	No. of busbars per phase	Max. X = 250 (mm)
Busbar support scaled for flat busbars					
	20×5	250	QR6H6FS01 QR6H8FS01	1	17 kA
	20×10	400		1	20 kA
	30×10	630		1	20 kA
Busbar support linear for shaped busbar					
BA0400		400	QR8H6SS01 QR8H8SS01	1	23 kA
BA0800		800		1	32 kA

Subdistribution boards

System pro E® energy Combi

Busbar system

	Article	Length mm	I_n A	Order details Type code	Order code	Price	Pcs.
	**Distribution busbars with shaped section**						
	Busbar In = 400 A	1730	400	BA0400			1
	Busbar In = 800 A	1730	800	BA0800			1

Cross section		Type code	I_n A	No. busbar/ phase	Dimensions Cu busbar mm	Section dimensions mm²	Length mm	Weight kg
Busbars with shaped section for applications up to 800 A								
		BA0400	400	1	20 x 20	200	1730	4
		BA0800	800	1	20 x 20	280	1730	4.4

Subdistribution boards

System pro E® energy Combi

Accessories, mounting support

	Article	Order details		Price	Pcs.
		Type code	Order code		
 AD1068 AD1077	**Joints for busbars with shaped section**				
	No. 4 copper 400 A branch joints	AD1077	1STQ008218A0000		4
	No. 4 joints for joining busbars with shaped section 400 / 800 A	AD1068			4
	**Hammer seal screws for busbars with shaped section**				
	No. 12 M8 screws L = 20 mm for flexible busbars and cable shoes complete with screw-covering cap	AD1056	1STQ008214A0000		12
	No. 12 M8 screws L = 27 mm for flat busbars 10 mm complete with screw-covering cap	AD1064	1STQ008215A0000		12
	**Resting bases for busbars with shaped section**				
	No. 4 resting bases for 400 / 800 A busbars	AD1065			4
	**Busbars holders end cover**				
	No. 2 terminal covers for linear busbar holders CKBS1161, CKBS1181	BP0632			1

Subdistribution boards

System pro E® energy Combi

Busbar system

	Article	Length mm	I_n A	Order details Type code	Order code	Price	Pcs.
	Flat busbar Copper busbars drilled and threaded for rapid connection of the conducters Can be used with both busbar holders (Linear/staircase(scaled)						
	flat busbar 20×5, H2000 threated M.6	2000	250	QR02F2005	1SZE980120B0460		1
	flat busbar 20×10, H2000 threated M.6	2000	400	QR02F2010	1SZE980120B0470		1
	flat busbar 30×5, H2000 threated M.6	2000	400	QR02F3005	1SZE980120B0480		1
	flat busbar 30×10, H2000 threated M.8	2000	630	QR02F3010	1SZE980120B0490		1
	flat busbar 40x10, H2000 threated M.8	2000	800	QR02F4010	1SZE980120B0500		1
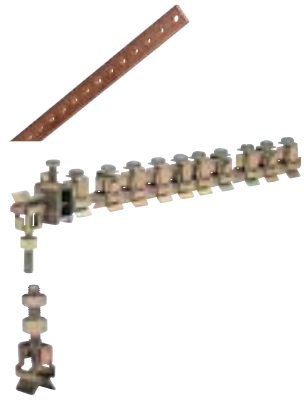	**Flat busbar** Copper busbars drilled and threaded for rapid connection of the conducters Can be used with both busbar holders (Linear/staircase (scaled)						
	Horizontal PE busbar 20×05, W400	400		QR4HP2005	1SZE980120B0265		
	Horizontal PE busbar 20×05, W600	600		QR6HP2005	1SZE980120B0295		
	Horizontal PE busbar 20×05, W800	800		QR8HP2005	1SZE980120B0325		
	Horizontal PE busbar 20×10, W400	400		QR4HP2010	1SZE980120B0260		
	Horizontal PE busbar 30×10, W400	400		QR4HP3010	1SZE980120B0270		
	Horizontal PE busbar 40×10, W400	400		QR4HP4010	1SZE980120B0280		
	Horizontal PE busbar 20×10, W600	600		QR6HP2010	1SZE980120B0290		
	Horizontal PE busbar 30×10, W600	600		QR6HP3010	1SZE980120B0300		
	Horizontal PE busbar 40×10, W600	600		QR6HP4010	1SZE980120B0310		
	Horizontal PE busbar 20×10, W800	800		QR8HP2010	1SZE980120B0320		
	Horizontal PE busbar 30×10, W800	800		QR8HP3010	1SZE980120B0330		
	Horizontal PE busbar 40×10, W800	800		QR8HP4010	1SZE980120B0340		
	Hor.earthbar W400 CU12×4+conn.	400		QR4PC3010	1SZE980120B0540		
	Hor.earthbar W600 CU12×4+conn.	600		QR6PC3011	1SZE980120B0550		
	Hor.earthbar W800 CU12×4+conn.	800		QR8PC3012	1SZE980120B0560		
QR0CM6P20	Fixation clips M6 (set of 20 pcs)			QR0CM6P20	1SZE980120B0570		
QR0C16P20	Connectors 16mm² (set of 20 pcs)			QR0C16P20	1SZE980120B0580		
QR0C35P20	Connectors 35mm² (set of 20 pcs)			QR0C35P20	1SZE980120B0590		

Modular dividers

Three-poles






Code		AD1004		AD1028	AD1029	AD1027
I_n	(A)	125		125	125	160
I_{cw}	(kA)	10		4.2	4.2	6.2
I_{pk}	(kA)	24		25	25	20
Version	poli	4.2		4	4	4
Installation		DIN35/plate		DIN35/plate	DIN35/plate	DIN35
Power supply ⌀ cable (mm²)	min.	6		6	6	10
	max.	35		25 with cable terminal	25 with cable terminal	50
N°outgoing feeder ⌀ cable (mm²)		1/6	5/phase	-	-	-
		1.5/6	4/neutral	-	-	-
		1.5/10	2/phase	7	9	-
			6/neutral			
		1.5/16		-	2	-
		2.5/16		-	-	8
		6/25		2	2	3
Dimensions H×W×D	(mm)	74.5×98×45		93×89×48	96×126×48	90×160.5×50
N° DIN modules		5.5		5	7	9
Rated service voltage U_e	(V)	1000 Vca 1500 Vcc		440	440	440
Degree of protection	IP	20		20	20	20

Subdistribution boards

System pro E® energy Combi
Internal form of segregation form 2b

QRFV46001

Vertical busbar segregation
- Set to separate the busbar behind the covers
- Touch protection in front of the busbar system
- Mounting position vertical
- Scaled Busbar Holder
- Material is transparent plastic
- Internal and external cable container (400 mm width)

Vertical segregation (400 mm width)

Width mm	Height mm	Order details Type code	Order code	Price	Pcs.
400	600	QRFV46001	1SZE980190B0010		
	800	QRFV48001	1SZE980190B0020		
closing		QRFV4C001	1SZE980190B0030		

QRFV66001

Vertical busbar segregation
- Set to separate the busbar behind device area
- Touch protection in front of the busbar system
- Mounting position vertical
- Flat Busbar holder
- Material is transparent plastic

Vertical segregation (600/800 mm width)

Width mm	Height mm	Order details Type code	Order code	Price	Pcs.
600/800	600	QRFV66001	1SZE980190B0040		
	800	QRFV68001	1SZE980190B0050		
closing		QRFV6C001	1SZE980190B0060		

QRFW63001

Horizontal busbar segregation
- Set to separate the busbar behind device area
- Touch protection behind the busbar system
- Mounting position horizontal
- Material is transparent plastic

Horizontal busbar segregation

Width mm	Height mm	Order details Type code	Order code	Price	Pcs.
600	300	QRFW63001	1SZE980190B0070		
800	300	QRFW83001	1SZE980190B0080		

QRFV01XSS

- Set to separate the busbars in external cable container to the device area
- Mounting position vertical
- Material is transparent plastic

Depth mm	Height mm	Order details Type code	Order code	Price	Pcs.
250	1000	QRFV01XSS	1SZE980190B0090		1

Subdistribution boards

System pro E® energy Combi

Accessories, mounting support

	Article	Order details		Price	Pcs.
		Type code	Order code		
QAW0010P2	**Support universal, for horizontal installation** For a Din rail or cable fastening rail or earth busbar max. 20 x 5 mm Material is metal	QAW0010P2	1SZE980150B0010		2
		QAW0010P5	1SZE980150B0015		50
QAW0020P2	**Support universal, for vertical installation** For a Din rail or cable fastening Material is metal	QAW0020P2	1SZE980150B0020		2
		QAW0020P5	1SZE980150B0025		50
QRFH66001	**Horizontal shelf**				
	Width 400	QRFH46001	1SZE980190B0100		1
	Width 600	QRFH66001	1SZE980190B0110		1
	Width 800	QRFH86001	1SZE980190B0120		1
QAW0061P1	**Support universal, horizontal cross piece**				
	Width 400	QAW0040P1	1SZE980150B0030		1
	Width 600	QAW0060P1	1SZE980150B0031		1
	Width 800	QAW0080P1	1SZE980150B0032		1
QAW0070	Metal supports for wiring duct	QAW0070P4	1SZE980150B0061		4
		QAW0070P10	1SZE980150B0066		10
QAMB001P2	Mounting brackets for AD1034 & AD1053	QAMB001P2	1SZE980160B0260		2

Subdistribution boards

System pro E® energy Combi

Accessories, wiring system

	Article	Unit	Order details Type code	Order code	Price	Pcs.
ED44G ED45G	**Wire holder** For wire guidance, installation depth 28.5 mm, to be inserted into the DIN rail from the rear		ED44GP10	2CPX047409R9999		10
			ED44GP50	2CPX047405R9999		50
			ED44GP1000	2CPX047412R9999		1000
	Wire holder For the wire guidance or receiving a plastic tube of ⌀ 38 mm, installation depth 55 mm, to be inserted in the DIN rail from the rear		ED45GP10	2CPX047410R9999		10
			ED45GP50	2CPX047406R9999		50
			ED45GP1000	2CPX047413R9999		1000
ED59G	**DIN rails adapter** For ED44 and ED45, to be snapped onto the DIN rail from the front		ED59GP10	2CPX047411R9999		10
ED42G	**Console for the ED44 and ED45 wire holders** To be inserted in the DIN rail from the rear		ED42GP10	2CPX047407R9999		10
ED43G	**Console for the ED44 and ED45 wire holders** To be snapped onto the DIN rail from the front		ED43GP10	2CPX047408R9999		10
	Support for horizontal wiring - Below double DIN - Can be combined with ED44 / ED45 / ED42 - Material is polyamid (PA) - Screwless		QAW0040P2	1SZE980150B0040		2
			QAW0040P5	1SZE980150B0045		50
	Support for Horizontal /Vertical Wiring on QAW0040 - Only in combination with QAW0040		QAW0045P2	1SZE980150B0041		2
			QAW0045P5	1SZE980150B0046		50
	Support for vertical wiring on the backplate - For wiring space up to 60 mm 80 mm height - Material is polyamid (PA) - Screwless		QAW0050P2	1SZE980150B0050		2
			QAW0050P5	1SZE980150B0055		50
	Support for wiring duct - For wiring ducts with 60 mm and 80 mm height - Material is polyamid (PA)		QAW0060P2	1SZE980150B0060		2
			QAW0060P5	1SZE980150B0065		50
	45° Support for wiring duct / Earth-bar / DIN-rail		QAW0080P2	1SZE980150B0280		2
			QAW0080P5	1SZE980150B0285		50

	Article	Order details Type code	Order code	Price	Pcs.
	**Wiring ducts** For horizontal and vertical installation RAL 7035, lenght 2000 mm				
	Slot 8 - 12 mm Base × Height in mm				
	60 × 60	05067	M050670000		1
	60 × 80	05087	M050870000		1
	80 × 60	05069	M050690000		1
	80 × 80	05089	M050890000		1
	Slot 4 - 6 mm Base × Height in mm				
	60 × 60	05167	M051670000		1
	60 × 80	05187	M051870000		1
	80 × 60	05169	M051690000		1
	80 × 80	05189	M051890000		1

Subdistribution boards

System pro E® energy Combi
System Unifix, overview



—
01



—
02



—
03



—
04



—
05



—
06



—
07



—
08

—
01 Direct connection with the 400/800 A system of busbars with shaped section
—
02 Feeder module for 400 A frame (L1-L2-L3-N)
—
03 Direct power supply of the bases by means of feeder module ED2209

—
04 Power supply by means of general row circuit-breaker
—
05 Connections (L1-L2-L3-N) for System pro M modular apparatus
—
06 Power supply of the busbar with 100 A feeder module without cable
Terminal capacity 35mm²

—
07 Direct power supply of the busbars by means of feeder module
—
08 Power supply by means of modules and cables in parallel

Subdistribution boards

System pro E® energy Combi
System Unifix L







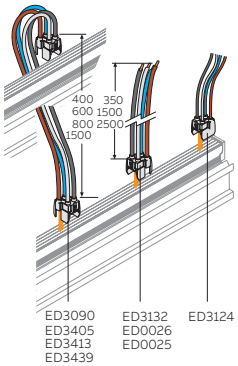



Article	Order details		Price	Pcs.
	Type code	Order code		
4-pole busbars				
100 A 4P 12 module busbar, width 400 mm	ED2944	1STQ008307A0000		6
100 A 4P 18 module busbar, width 450 mm	ED2951	1STQ008308A0000		6
100 A 4P 24 module busbar, width 600 mm	ED2969	1STQ008311A0000		6
100 A 4P 36 module busbar, width 800 mm	ED2977	1STQ008312A0000		6
Connections for various apparatus				
Connection with 2 conductors L1/N 40 A	ED3355	1STQ008339A0000		6
Connection with 3 conductors L1/L2/L3 40 A	ED3363	1STQ008340A0000		6
Connection with 4 conductors L1/L2/L3/N 40 A	ED3371	1STQ008341A0000		6
Connections for apparatus				
No. 10 connections L1-N 40 A	ED3272	1STQ008336A0000		10
No. 10 connections L2-N 40 A	ED3280	1STQ008337A0000		10
No. 10 connections L3-N 40 A	ED3298	1STQ008338A0000		10
No. 10 connections L 1 100 A	ED3033	1STQ008318A0000		10
No. 10 connections L 2 100 A	ED3041	1STQ008319A0000		10
No. 10 connections L 3 100 A	ED3058	1STQ008320A0000		10
No. 10 connections N 100 A	ED3066	1STQ008321A0000		10
Feeder with 4P 100 A cable, width 350 mm	ED3132	1STQ008335A0000		10
Feeder with 4P 100 A cable, width 1500 mm	ED0026	1STQ008306A0000		10
Feeder with 4P 100 A cable, width 1500 mm	ED0025	1STQ008305A0000		10
Power supply modules with cable				
Parallel module 4P 100 A with cable, width 600 mm	ED3090	1STQ008323A0000		6
Parallel module 4P 100 A with cable, width 800 mm	ED3413	1STQ008343A0000		6
Parallel module 4P 100 A with cable, width 1500 mm	ED3439	1STQ008344A0000		6
Power supply modules without cable I_n 100 A				
No. 10 single-pole power supply terminals L1	ED3101	1STQ008324A0000		10
No. 10 single-pole power supply terminals L2	ED3102	1STQ008326A0000		10
No. 10 single-pole power supply terminals L3	ED3103	1STQ008328A0000		10
No. 10 single-pole power supply terminals N	ED3104	1STQ008330A0000		10
Accessories				
N°10 busbar covers, width 600 mm	ED2961	1STQ008309A0000		10
N°2 busbar covers, width 800 mm	ED2962	1STQ008310A0000		2

Subdistribution boards

System pro E® energy Combi
System Unifix H















Article	Order details Type code	Order code	Price	Pcs.
Frames for Tmax				
Frame with 24 DIN module busbar	ED2183			1
Frame with 36 DIN module busbar	ED2191			1
Feeder modules				
4P 400 A feeder module (for ED2183-ED2191)	ED2209	1STQ008230A0000		1
Basic modules I_n 16 A				
Basic module for DIN L1-N top 16 A	ED2894			1
Basic modules I_n 40 A				
Basic module L1/Neutral top 40 A	ED2654	1STQ008248A0000		1
Basic module L2/Neutral top 40 A	ED2662	1STQ008249A0000		1
Basic module L3/Neutral top 40 A	ED2670	1STQ008250A0000		1
Basic modules I_n 63 A				
Basic module L1 top 63 A	ED2531	1STQ008231A0000		1
Basic module L2 top 63 A	ED2549	1STQ008232A0000		1
Basic module L3 top 63 A	ED2556	1STQ008238A0000		1
Basic module Neutral top 63 A	ED2564	1STQ008243A0000		1
Basic modules I_n 100 A				
Basic module with cable L1 top 100 A	ED2720	1STQ008251A0000		10
Basic module with cable L2 top 100 A	ED2738	1STQ008252A0000		2
Basic module with cable L3 top 100 A	ED2746	1STQ008253A0000		1
Basic module with cable Neutral top 100 A	ED2753	1STQ008254A0000		1
Basic modules ≤ I_n 40 A S800				
Basic module L1 top ≤ 40 A	ED2557	1STQ008239A0000		1
Basic module L2 top ≤ 40 A	ED2558	1STQ008240A0000		1
Basic module L3 top ≤ 40 A	ED2559	1STQ008241A0000		1
Basic module Neutral top ≤ 40 A	ED2560	1STQ008242A0000		1
Basic modules ≤ I_n 125 A S800				
Basic module L1 top 125 A	ED2551	1STQ008234A0000		1
Basic module L2 top 125 A	ED2552	1STQ008235A0000		1
Basic module L3 top 125 A	ED2553	1STQ008236A0000		1
Basic module Neutral bottom 125 A	ED2554	1STQ008237A0000		1
Basic module false pole, width 27 mm	ED2557	1STQ008239A0000		1

Subdistribution boards

System pro E® energy Combi
System Unifix H











Article	Order details		Price	Pcs.
	Type code	Order code		
Basic modules ≤ In 160 A, Tmax XT1				
Basic module L1 top L2 bottom	ED2217	1STQ008263A0000		1
Basic module L2 top L1 bottom	ED2225	1STQ008264A0000		1
Basic module L3 top Neutral bottom	ED2233	1STQ008265A0000		1
Basic module Neutral top L3 bottom	ED2241	1STQ008266A0000		1
Basic module false pole for residual current release RC221	ED2373	1STQ008279A0000		1
Basic modules ≤ In 250 A, Tmax XT3				
Basic module L1 top	ED2290	1STQ008271A0000		1
Basic module L2 top	ED2308	1STQ008272A0000		1
Basic module L3 top	ED2316	1STQ008273A0000		1
Basic module N top	ED2324	1STQ008274A0000		1
Basic module false pole for residual current release RC221	ED2373	1STQ008279A0000		1
Accessories				
Basic module false pole for DDA	ED2845	1STQ008283A0000		1
Basic module false pole for modular MDRC	ED2852	1STQ008284A0000		1
No. 2 IP20 covers (for ED2183-ED2191), width 173 mm (10 DIN modules)	ED2407	1STQ008282A0000		2
No. 6 duct supports 40 x 60 mm (only for modular apparatus)	ED2936	1STQ008285A0000		6
Spare parts				
No. 10 terminal covers for Tmax XT1	ED0001	1STQ008259A0000		10
No. 10 terminal covers for Tmax XT3	ED0003	1STQ008261A0000		10
No. 10 terminal covers for S200/F200	ED0004	1STQ008262A0000		10

Subdistribution boards

System pro E® energy Combi

System Unifix, technical data

Technical characteristics	Unifix H	Unifix L
Unifix systems		
Rated service voltage (U_e)	690 V AC	400 V AC
Rated insulation voltage (U_i)	1000 V AC	500 V AC
Rated impulse withstand voltage (U_{imp})	8 kV	6 kV
Rated frequency	50/60 Hz	50/60 Hz
Rated current (I_n)		
central power supply	400 A	100 A
lateral power supply	320 A	80 A
Rated short-time withstand current (I_{cw})	25 kA	-
Maximum peak current (I_{pk})	52,5 kA - 400 V	-
Maximum installable circuit-breaker size	250 A	100 A
Conditioned short-circuit current (I_{cc})		
Tmax XT1	50 kA - 400 V	-
Tmax XT3	50 kA - 400 V	-
With circuit-breaker		
S200	-	6 kA - 400 V
S200M	-	10 kA - 400 V
S200P	-	25 kA - 400 V
Degree of protection	IP20 with accessory	IP20
Characteristics of the insulating material	Self-extinguishing thermoplastic V1 (UL94)	Self-extinguishing thermoplastic V1 (UL94)
Characteristics of the conductor material	Electrolytic copper	Electrolytic copper
Width	24/600	12/400
(No. modules/mm)	36/800	24/600
		36/800
Installation of Unifix system		
Frame for Tmax XT series		
300 x 600 mm (H x L)	ED2183	-
300 x 800 mm (H x L)	ED2191	-
Fixing brackets Height 300 mm	AD1097	-
Crosspiece for direct connection to the rear busbars with shaped section with PB0803		
Width 600 mm	TL1000	-
Width 800 mm	TL1100	-
Busbar 4P		
12 mod.	-	ED2993
18 mod.	-	ED3009
24 mod.	-	ED3017
36 mod.	-	ED3025
Busbar 4P	-	
12 mod.	-	ED2944
18 mod.	-	ED2951
24 mod.	-	ED2969
36 mod.	-	ED2977
Fixing support	-	
24 mod.	-	GD1520
36 mod.	-	GD1530

(1) Select circuit-breakers in version with front terminals for copper cables.

Subdistribution boards

System pro E® energy Combi

System Unifix, selecting table

Series of circuit-breakers	Unifix H		Unifix L
Unifix systems Table for selecting connections according to the circuit-breaker			
SN201 DS941	(top power supply)		
	ED2654 L1/N 40 A	-	ED3272 L1/N 40 A
	ED2662 L2/N 40 A	-	ED3280 L2/N 40 A
	ED2670 L3/N 40 A	-	ED3298 L3/N 40 A
S200 - DS200 F200 up to 63A (Unifix L)	(top power supply)	(bottom power supply)	
	ED2531 L1 63A	ED2572 L1 63A	ED3033 L1 100A
	ED2549 L2 63A	ED2590 L2 63A	ED3041 L2 100A
	ED2556 L3 63A	ED2598 L3 63A	ED3058 L3 100A
	ED2564 N 63A	ED2606 N 63A	ED3066 N 100A
	ED2845 False pole module	-	-
S800	(top power supply)		
	ED2557 L1 ≤32A	-	-
	ED2558 L2 ≤32A	-	-
	ED2559 L3 ≤32A	-	-
	ED2560 N ≤32A	-	-
	ED2551 L1 125A	-	-
	ED2552 L2 125A	-	-
	ED2553 L3 125A	-	-
	ED2554 N 125A	-	-
	ED2550 False pole module	-	-
S280 (80-100A) E200 up to 100A - RS370 - F200 80/100A (Unifix H)	(top power supply)		
	ED2720 L1 100A	-	ED3132 pow. supply L1/L2/L3/N - 350mm
	ED2738 L2 100A	-	ED0026 pow. supply L1/L2/L3/N - 1500mm
	ED2746 L3 100A	-	ED0025 pow. supply L1/L2/L3/N - 2500mm
	ED2753 N 100A	-	-
MDRC - Various apparatus	(top power supply)	(bottom power supply)	
	ED2894 L1/N 16A	ED2910 L1/N 16A	ED3108 pow. supply 2 cables L1/N 16A
	ED2902 L1/L2 16A	ED2928 L1/L2 16A	ED3116 pow. supply 3 cables L1/L2/L3 16A
	-	-	ED3124 pow. supply 4 cables L1/L2/L3/N 16A
	-	-	ED3355 pow. supply 2 cables L1/N 40A
	-	-	ED3363 pow. supply 3 cables L1/L2/L3 40A
	-	-	ED3371 pow. supply 4 cables L1/L2/L3/N 71A
Circuit-breaker Tmax XT1	(top/bottom power supply)	-	-
	ED2217 L1 Top/L2 Bottom	-	-
	ED2225 L2 Top/L1 Bottom	-	-
Residual current Selenoid operator	ED2233 L3 Top/N Bottom	-	-
	ED2241 N Top/L3 Bottom	-	-
	ED2373 False pole module	-	-
	ED2381 False pole module	-	-
Circuit-breaker Tmax XT3	(top power supply)	(bottom power supply)	-
	ED2290 L1	ED2332 L1	-
	ED2308 L2	ED2340 L2	-
Residual current	ED2316 L3	ED2357 L3	-
	ED2324 N	ED2365 N	-
	ED2373 False pole module	-	-

(1) Select circuit-breakers in version with front terminals for copper cables.

Subdistribution boards

System pro E® energy Combi

Plug-in distribution system, overview

Uniclic plug-in distribution system

Uniclic is a secondary plug-in distribution system of 250A, 660V~ 60kA peak. Uniclic is a busbar for modular devices such as MCBs as for comfort functions.
Uniclic can be positioned between the DIN-rails, indepentent on the type of system enclosure: System pro E enery, TwinLine N, System pro E power and others.

The main advantage of Uniclic is the safety aspect (IP20): adding or removing electrical circuits in a panel board without disconnecting the power. All outgoing circuits stay in the operational function, due to the fact that all operations are done using the insulated click connection, without touching the life parts, not even when using an insulated tool.

The Uniclic distribution system is suitable for integration in all system enclosures conform to IEC 60439-1.

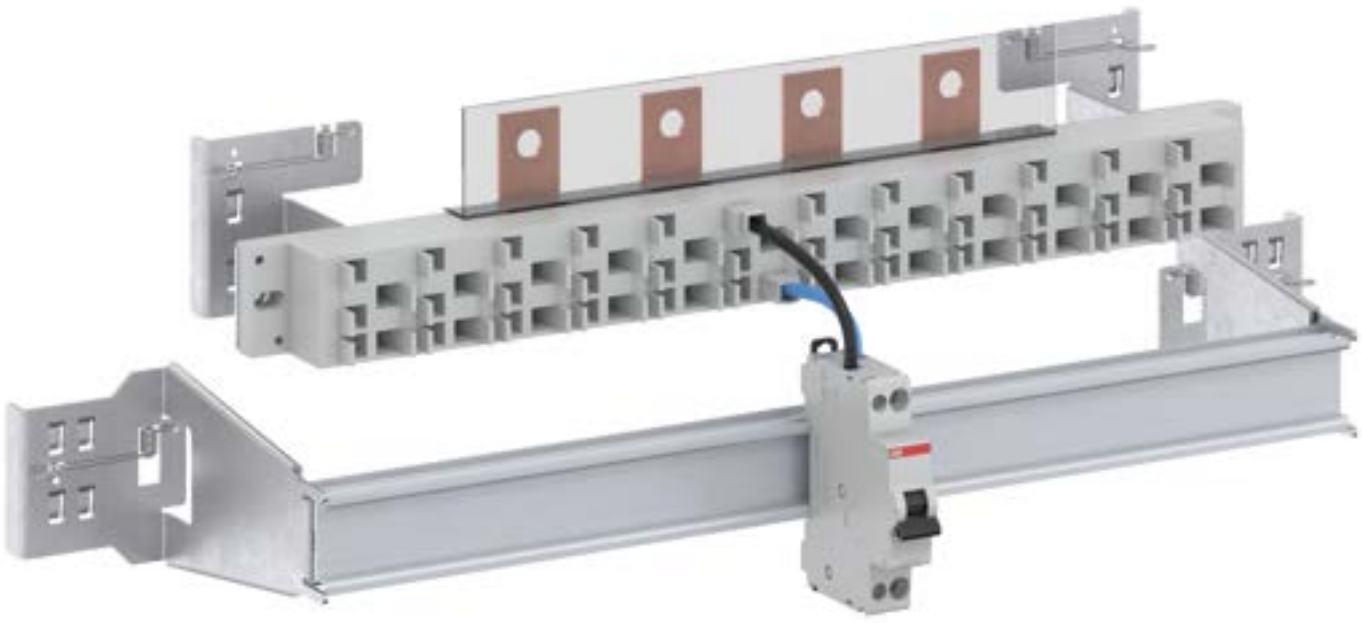



Subdistribution boards

System pro E® energy Combi

Uniclic plug-in distribution system



Material:

- Connecting Lugs, copper, uncoated
- Housing / Body, PC+PU resin, grey
- Protective Profile, PVC, clear
- Nominal Voltage, 400 V
- Nominal Current, 250 A
- I_{cw} (1 sec.) 10kA / I_{pk} 61kA
- Degree of protection IP20

Additional information			Order details			
Width	Dimensions (mm) L×W×H	Description	Type code	Order code	Price	Pcs.
UNICLIC_block 24 modules 3P+2N	422×40×50	Uniclic 250A 36-24	Uniclic 250A 36-24	2CDL701001R0250		1
UNICLIC_block 36 modules 3P+2N	616×40×50	Uniclic 250A 54-36	Uniclic 250A 54-36	2CDL701001R2250		1

Material:

- brackets, sheet steel, 2 mm

Additional information			Order details			
	Description		Type code	Order code	Price	Pcs.
Mounting brackets for UNICLIC_block	Bracket for Moduclic 600/800		QAMB000P2	1SZE980160B0250		1

Material:

- Connector plug with cable
- Body of the connector, PC, grey
- Contact connector, bronze, uncoated
- Cable identification, H07V-K,
- Nominal current, 6mm² (40 A), 10mm² (63 A)
- Nominal Voltage 450/750 V
- Cable lug, End sleeve, Brass pressed
- Cable length 120 mm & 320 mm

Additional information				Order details			
Description	Cables	Cable section (mm²)	Cable length	Type code	Order code	Price	Pcs.
Cable with stripped end	10 black cables	6	120	Uniclic-CW 6/120	2CDL701302R0120		1
	10 blue cables	6	120	Uniclic-CW 6/120 N	2CDL701301R0120		1
	10 black cables	10	120	Uniclic-CW 10/120	2CDL701302R1120		1
	10 blue cables	10	120	Uniclic-CW 10/120 N	2CDL701301R1120		1
Cable with stripped end	10 black cables	6	320	Uniclic-CW 6/320	2CDL701302R0320		1
	10 blue cables	6	320	Uniclic-CW 6/320 N	2CDL701301R0320		1
	10 blue cables	10	320	Uniclic CW 10/320	2CDL701302R1320		1
	10 blue cables	10	320	Uniclic-CW 10/320 N	2CDL701301R1320		1

Additional information	Quantity included	Order details			
Description		Type code	Order code	Price	Pcs.
Plugs					
Connector with insulated crimp, 1.5-2.5 mm²	20	Uniclic CP 2	2CDL701001R1002		1
Connector with insulated crimp, 4-6 mm²	20	Uniclic CP 6	2CDL701001R1006		1
Connector with insulated crimp, 6-10 mm²	20	Uniclic CP 10	2CDL701001R1010		1

Subdistribution boards

System pro E® energy Combi
Mounting of Uniclic

On DIN rail (step = 200 mm)

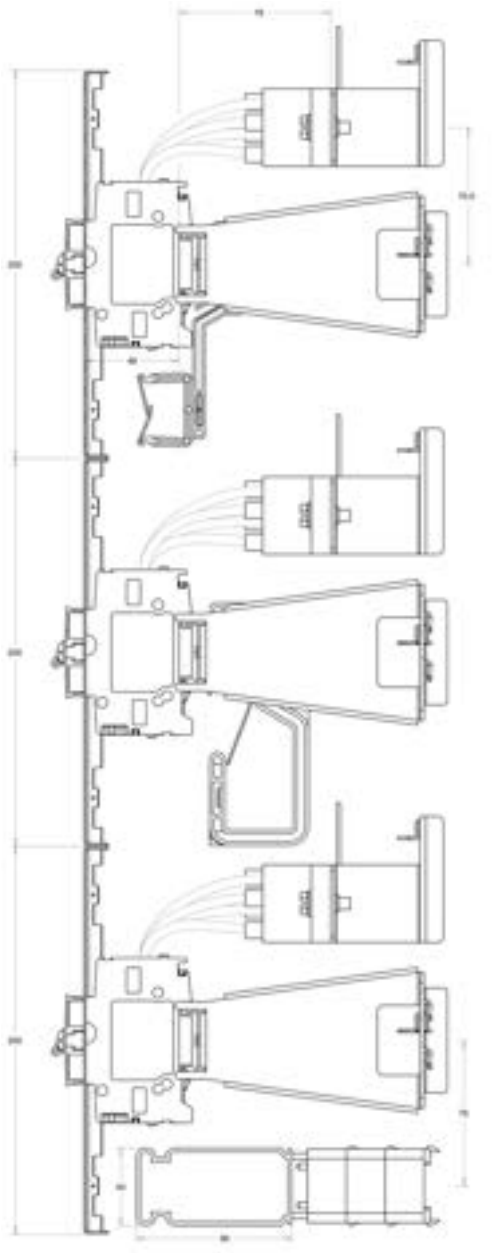

Direct on busbar (step = 200 mm)

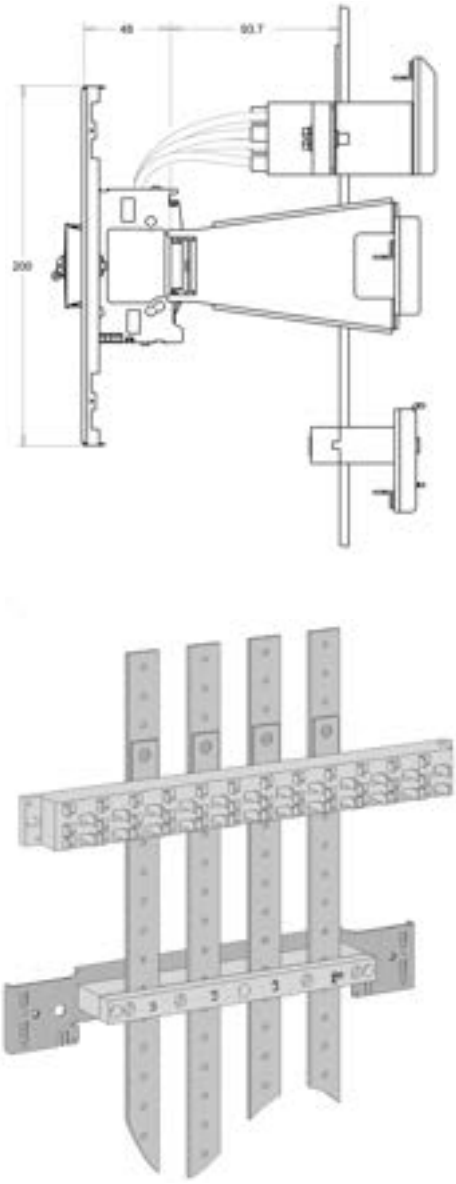

Incoming connections



Cable max. 70 mm² – 170 A



Flexibar 3 × 20 × 1 – 250 A

Subdistribution boards

System pro E® energy Combi

Planning aid SMISSLINE TP 125 A

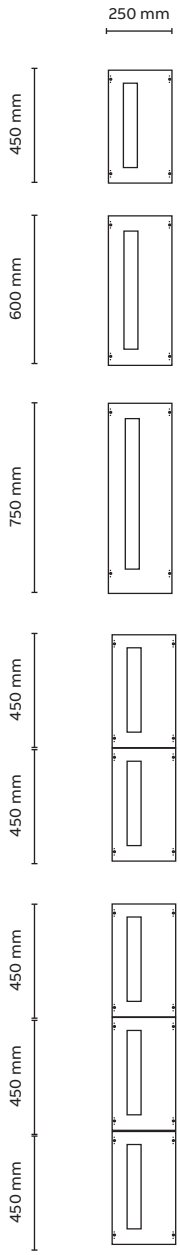

Modules for the cabinets Type	Panel width	Panel height	Socket plinth length SU	Pieces
1x QXEV44501	400 mm	450 mm	22 SU	1
				1
1x QXEV46001	400 mm	600 mm	30 SU	1
				1
1X QXEV47501	400 mm	750 mm	38 SU	1
				1
2x QXEV44501	400 mm	900 mm	46 SU	1
				1
3x QXEV44501	400 mm	1350 mm	46 SU	1
				1

Planning note

When positioning incoming terminal blocks under cover joints, use the lower terminal blocks ZLS228 or ZLS229.

Vertical

Socket plinth starter kit				Socket plinth in individual parts	
Type	**Order code**	**Pieces**	**Space units**	**Type**	**Order code**
ZLS905E22-3L	2CCA183102R0001	2	8	ZLS908	2CCA183030R0001
		1	6	ZLS906	2CCA183035R0001
		1		ZLS920 (End part)	2CCA183017R0001
ZLS905E22-3LN*	2CCA183103R0001	3/4*		ZLS201E22 (Cu bus bar)	2CCF800165R0001
ZLS905E30-3L	2CCA183110R0001	3	8	ZLS908	2CCA183030R0001
		1	6	ZLS906	2CCA183035R0001
		1		ZLS920 (End part)	2CCA183017R0001
ZLS905E30-3LN*	2CCA183111R0001	3/4*		ZLS201E38 (Cu bus bar)	2CCF800173R0001
ZLS905E38-3L	2CCA183118R0001	4	8	ZLS908	2CCA183030R0001
		1	6	ZLS906	2CCA183035R0001
		1		ZLS920 (End part)	2CCA183017R0001
ZLS905E38-3LN*	2CCA183119R0001	3/4*		ZLS201E46 (Cu bus bar)	2CCF800177R0001
ZLS905E46-3L	2CCA183126R0001	5	8	ZLS908	2CCA183030R0001
		1	6	ZLS906	2CCA183035R0001
		1		ZLS920 (End part)	2CCA183017R0001
ZLS905E46-3LN*	2CCA183127R0001	3/4*		ZLS201E54 (Cu bus bar)	
ZLS905E46-3L	2CCA183126R0001	9	8	ZLS908	2CCA183030R0001
		1		ZLS920 (End part)	2CCA183017R0001
ZLS905E46-3LN*	2CCA183127R0001	3/4*		ZLS201E72 (Cu bus bar)	2CCF800190R0001

* For version with N (4-pole)

Planning note

Additional starter kit with AB-bus bar on demand.

Subdistribution boards

System pro E® energy Combi

Planning aid SMISSLINE TP 125 A

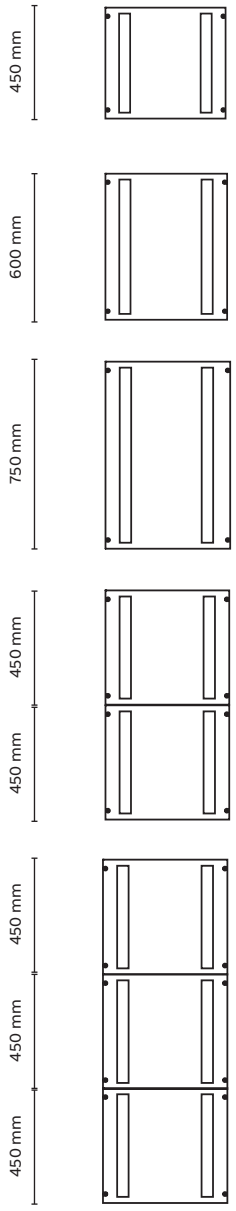

Modules for the cabinets Type	Panel width	Panel height	Socket plinth length SU	Pieces
1x QXEV64501	600 mm	450 mm	2 x 22 SU	2
1x QXEV84501	800 mm			2
1x QXEV66001	600 mm	600 mm	2 x 30 SU	2
1x QXEV86001	800 mm			2
1X QXEV67501	600 mm	750 mm	2 x 38 SU	2
1X QXEV87501	800 mm			2
2x QXEV44501	600 mm	900 mm	2 x 46 SU	2
				2
3x QXEV84501	800 mm	1350 mm	2 x 72 SU	2
				2

Planning note

When positioning incoming terminal blocks under cover joints, use the lower terminal blocks ZLS228 or ZLS229.

Vertical

Socket plinth starter kit				Socket plinth in individual parts	
Type	**Order code**	**Pieces**	**Space units**	**Type**	**Order code**
ZLS905E22-3L	2CCA183102R0001	4	8	ZLS908	2CCA183030R0001
		2	6	ZLS906	2CCA183035R0001
		2	-	ZLS920 (End part)	2CCA183017R0001
ZLS905E22-3LN*	2CCA183103R0001	6/8*	-	ZLS201E22 (Cu bus bar)	2CCF800169R0001
ZLS905E30-3L	2CCA183110R0001	6	8	ZLS908	2CCA183030R0001
		2	6	ZLS906	2CCA183035R0001
		2	-	ZLS920 (End part)	2CCA183017R0001
ZLS905E30-3LN*	2CCA183111R0001	6/8*	-	ZLS201E38 (Cu bus bar)	2CCF800173R0001
ZLS905E38-3L	2CCA183118R0001	8	8	ZLS908	2CCA183030R0001
		2	6	ZLS906	2CCA183035R0001
		2	-	ZLS920 (End part)	2CCA183017R0001
ZLS905E38-3LN*	2CCA183119R0001	6/8*	-	ZLS201E54 (Cu bus bar)	
ZLS905E46-3L	2CCA183126R0001	10	8	ZLS908	2CCA183030R0001
		2	6	ZLS906	2CCA183035R0001
		2	-	ZLS920 (end piece)	2CCA183017R0001
ZLS905E46-3LN*	2CCA183127R0001	6/8*	-	ZLS201E46 (copper rail)	2CCF800177R0001
ZLS905E46-3L	2CCA183126R0001	18	8	ZLS908	2CCA183030R0001
		2	-	ZLS920 (End part)	2CCA183017R0001
ZLS905E46-3LN*	2CCA183127R0001	6/8*	-	ZLS201E72 (Cu bus bar)	2CCF800190R0001

* For version with N (4-pole)

Planning note

Additional starter kit with AB-bus bar on demand.

Subdistribution boards

System pro E® energy Combi

Planning aid SMISSLINE TP 250 A

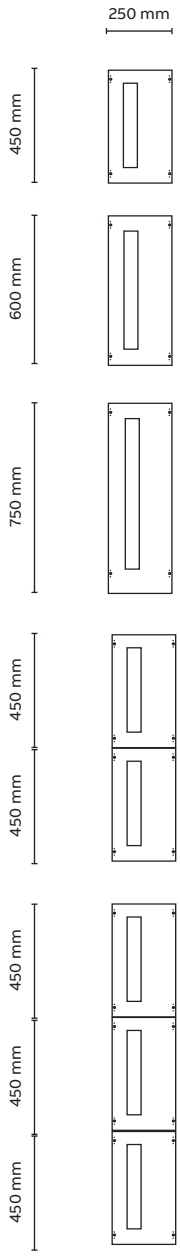

Modules for the cabinets Type	Panel width	Panel height	Socket plinth length SU	Pieces
1x QXEV44502	400 mm	450 mm	22 SU	
1x QXEV46002	400 mm	600 mm	30 SU	1
				1
1X QXEV47502	400 mm	750 mm	38 SU	1
				1
2x QXEV44502	400 mm	900 mm	46 SU	1
				1
3x QXEV44502	400 mm	1350 mm	72 SU	1
				1

Planning note

When positioning incoming terminal blocks under cover joints, use the lower terminal blocks ZLS228 or ZLS229.

Vertical

Socket plinth starter kit				Socket plinth in individual parts	
Type	**Order code**	**Pieces**	**Space units**	**Type**	**Order code**
ZLSP905E30-3L	2CCF212200A0001	3	8	ZLSP908	2CCF212052A0001
		1	6	ZLSP906	2CCF212053A0001
		1		ZLSP920 (End part)	2CCF212082A0001 Sockel
ZLSP905E30-3LN*	2CCF212300A0001	3/4*		ZLSP1 250E30	2CCF212100M0030
ZLSP905E38-3L	2CCF212204A0001	4	8	ZLSP908	2CCF212052A0001
		1	6	ZLSP906	2CCF212053A0001
		1		ZLSP920 (End part)	2CCF212082A0001 Sockel
ZLSP905E38-3LN*	2CCF212304A0001	3/4*		ZLSP1 250E38	2CCF212100M0038
ZLSP905E46-3L	2CCA183126R0001	5	8	ZLSP908	2CCF212052A0001
		1	6	ZLSP906	2CCF212053A0001
		1		ZLSP920 (End part)	2CCF212082A0001 Sockel
ZLSP905E46-3LN*	2CCA183127R0001	3/4*		ZLSP1 250E46	2CCF212100M0046
ZLSP905E46-3L	2CCA183126R0001	9	8	ZLSP908	2CCF212052A0001
				ZLSP906	2CCF212053A0001
		1		ZLSP920 (End part)	2CCF212082A0001 Sockel
ZLSP905E46-3LN*	2CCA183127R0001	3/4*		ZLSP1 250E72	2CCF212100M0072

* For version with N (4-pole)

Planning note

Additional starter kit with AB-bus bar on demand.

Subdistribution boards

System pro E® energy Combi

Planning aid SMISSLINE TP 250 A

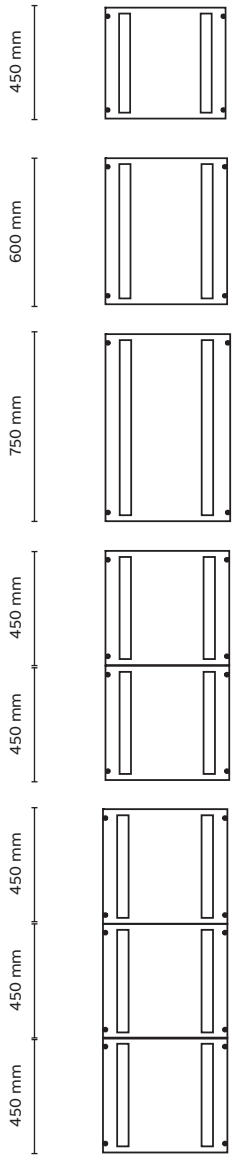

Modules for the cabinets Type	Panel width	Panel height	Socket plinth length SU	Pieces
1x QXEV64502	600 mm	450 mm	2x 22 SU	
1x QXEV84502	800 mm			
1x QXEV66002	600 mm	600 mm	2x 30 SU	2
1x QXEV86002	800 mm			2
1X QXEV67502	600 mm	750 mm	2x 38 SU	2
1x QXEV87502	800 mm			2
2x QXEV64502	600 mm	900 mm	2x 46 SU	2
2x QXEV84502	800 mm			2
3x QXEV64502	600 mm	1350 mm	2x 72 SU	2
3x QXEV84502	800 mm			2

Planning note

When positioning incoming terminal blocks under cover joints, use the lower terminal blocks ZLS228 or ZLS229.

Vertical

Socket plinth starter kit				Socket plinth in individual parts	
Type	**Order code**	**Pieces**	**Space units**	**Type**	**Order code**
ZLSP905E30-3L	2CCA183110R0001	6	8	ZLSP908	2CCF212052A0001
		2	6	ZLSP906	2CCF212053A0001
		2		ZLSP920 (End part)	2CCF212082A0001 Sockel
		6/8*		ZLSP1 250E30	2CCF212100M0030
ZLSP905E38-3L	2CCA183118R0001	8	8	ZLSP908	2CCF212052A0001
		2	6	ZLSP906	2CCF212053A0001
		2		ZLSP920 (End part)	2CCF212082A0001 Sockel
ZLSP905E38-3LN*	2CCA183119R0001	6/8*		ZLSP1 250E38	2CCF212100M0038
ZLSP905E46-3L	2CCA183126R0001	10	8	ZLSP908	2CCF212052A0001
		2	6	ZLSP906	2CCF212053A0001
		2		ZLSP920 (End part)	2CCF212082A0001 Sockel
ZLSP905E46-3LN*	2CCA183127R0001	6/8*		ZLSP1 250E46	2CCF212100M0046
ZLSP905E46-3L	2CCA183126R0001	18	8	ZLSP908	2CCF212052A0001
				ZLSP906	2CCF212053A0001
		2		ZLSP920 (End part)	2CCF212082A0001 Sockel
ZLSP905E46-3LN*	2CCA183127R0001	6/8*		ZLSP1 250E72	2CCF212100M0072

* For version with N (4-pole)

Planning note

Additional starter kit with AB-bus bar on demand.

Subdistribution boards

System pro E® energy L

Dimensions of cabinets

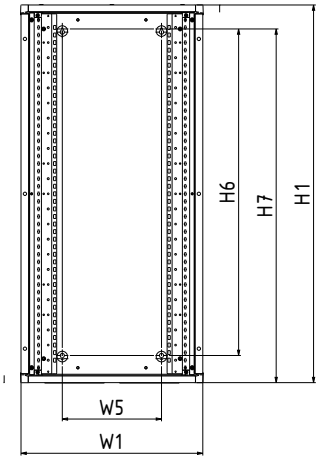

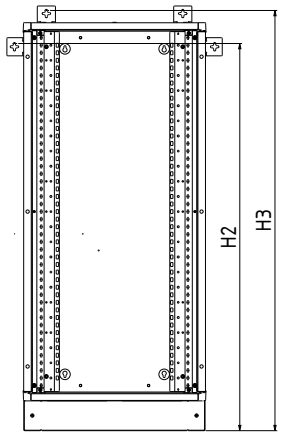





H	W	D	H1	W1	H2	H3	W3	H4	W4	H5	W5	H6	H7
600	400	250	649	385	680	790	446	710	235	490	112	480	569
800	400	250	849	385	880	990	446	910	235	690	112	680	769
1000	400	250	1049	385	1080	1190	446	1110	235	890	112	880	969
1200	400	250	1249	385	1280	1390	446	1310	235	1090	112	1080	1169
1400	400	250	1449	385	1480	1590	446	1510	235	1290	112	1280	1369
1600	400	250	1649	385	1680	1790	446	1710	235	1490	112	1480	1569
1800	400	250	1849	385	1880	1990	446	1910	235	1690	112	1680	1769
2000	400	250	2049	385	2080	2190	446	2110	235	1890	112	1880	1969
600	600	250	649	601	680	790	662	710	451	490	328	480	569
800	600	250	849	601	880	990	662	910	451	690	328	680	769
1000	600	250	1049	601	1080	1190	662	1110	451	890	328	880	969
1200	600	250	1249	601	1280	1390	662	1310	451	1090	328	1080	1169
1400	600	250	1449	601	1480	1590	662	1510	451	1290	328	1280	1369
1600	600	250	1649	601	1680	1790	662	1710	451	1490	328	1480	1569
1800	600	250	1849	601	1880	1990	662	1910	451	1690	328	1680	1769
2000	600	250	2049	601	2080	2190	662	2110	667	1890	328	1880	1969
600	800	250	649	817	680	790	878	710	667	490	544	480	569
800	800	250	849	817	880	990	878	910	667	690	544	680	769
1000	800	250	1049	817	1080	1190	878	1110	667	890	544	880	969
1200	800	250	1249	817	1280	1390	878	1310	667	1090	544	1080	1169
1400	800	250	1449	817	1480	1590	878	1510	667	1290	544	1280	1369
1600	800	250	1649	817	1680	1790	878	1710	667	1490	544	1480	1569
1800	800	250	1849	817	1880	1990	878	1910	667	1690	544	1680	1769
2000	800	250	2049	817	2080	2190	878	2110	667	1890	544	1880	1969

Subdistribution boards

System pro E® energy M

Dimensions of cabinets

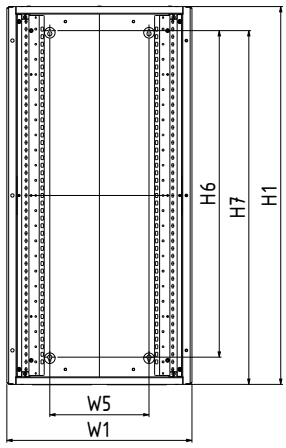

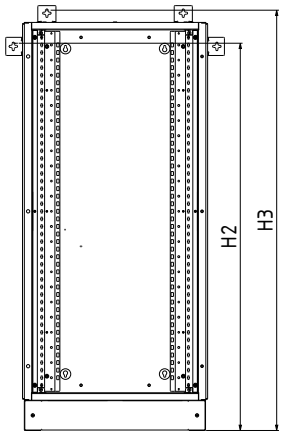

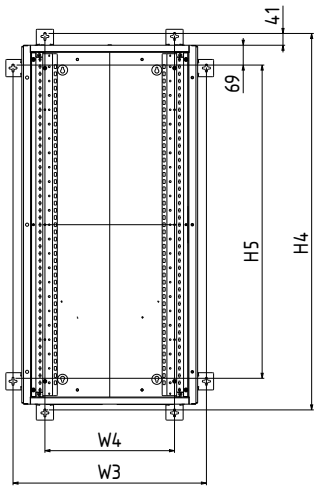



H	W	D	H1	W1	H2	H3	W3	H4	W4	H5	W5	H6	H7
600	**400**	**250**	**649**	**396**	**680**	**790**	**457**	**710**	**235**	**490**	**112**	**480**	**569**
800	400	250	849	396	880	990	457	910	235	690	112	680	769
1000	400	250	1049	396	1080	1190	457	1110	235	890	112	880	969
1200	400	250	1249	396	1280	1390	457	1310	235	1090	112	1080	1169
1400	400	250	1449	396	1480	1590	457	1510	235	1290	112	1280	1369
1600	400	250	1649	396	1680	1790	457	1710	235	1490	112	1480	1569
1800	400	250	1849	396	1880	1990	457	1910	235	1690	112	1680	1769
2000	400	250	2049	396	2080	2190	457	2110	235	1890	112	1880	1969
600	600	250	649	612	680	790	673	710	451	490	328	480	569
800	600	250	849	612	880	990	673	910	451	690	328	680	769
1000	600	250	1049	612	1080	1190	673	1110	451	890	328	880	969
1200	600	250	1249	612	1280	1390	673	1310	451	1090	328	1080	1169
1400	600	250	1449	612	1480	1590	673	1510	451	1290	328	1280	1369
1600	600	250	1649	612	1680	1790	673	1710	451	1490	328	1480	1569
1800	600	250	1849	612	1880	1990	673	1910	451	1690	328	1680	1769
2000	600	250	2049	612	2080	2190	673	2110	451	1890	328	1880	1969
600	800	250	649	828	680	790	889	710	667	490	544	480	569
800	800	250	849	828	880	990	889	910	667	690	544	680	769
1000	800	250	1049	828	1080	1190	889	1110	667	890	544	880	969
1200	800	250	1249	828	1280	1390	889	1310	667	1090	544	1080	1169
1400	800	250	1449	828	1480	1590	889	1510	667	1290	544	1280	1369
1600	800	250	1649	828	1680	1790	889	1710	667	1490	544	1480	1569
1800	800	250	1849	828	1880	1990	889	1910	667	1690	544	1680	1769
2000	800	250	2049	828	2080	2190	889	2110	667	1890	544	1880	1969

Subdistribution boards

System pro E® energy L

Power loss and weights of cabinets

Type of installation
Separate cabinet wall mounted



Type of installation
First or last cabinet wall mounted

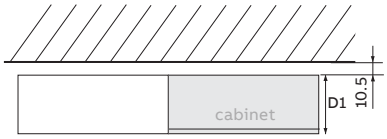

Type of installation
Central cabinet wall mounted

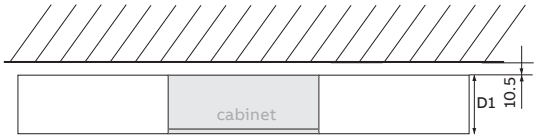

Cabinet types Height×Width×Depth in mm	Power loss in Watt												Cabinet weight in kg		Max. installation weight in kg
	Separate cabinet wall mounted				First or last cabinet wall mounted				Central cabinet wall mounted						
	25 °C	30 °C	35 °C	40 °C	25 °C	30 °C	35 °C	40 °C	25 °C	30 °C	35 °C	40 °C	With door	Without door	
600×400×250	31	45	59	74	33	47	62	77	30	44	57	72	19.4	14.3	15
800×400×250	38	55	72	91	40	57	76	95	37	53	70	88	23.8	17.6	20
1000×400×250	45	65	86	107	47	68	90	113	44	63	83	104	28.3	21	31
1200×400×250	38	55	72	91	40	58	76	95	37	53	70	87	32.8	24.4	37
1400×400×250	45	64	85	106	47	67	88	111	43	62	82	103	37.7	28.2	43
1600×400×250	51	73	97	121	54	77	102	128	49	70	93	116	42.1	31.5	48
1800×400×250	59	85	112	140	63	89	118	148	56	80	106	133	46.8	35.1	60
2000×400×250	67	96	126	158	71	101	134	168	64	91	121	151	51.5	38.7	72
600×600×250	42	60	80	100	40	57	75	94	37	51	71	89	24.4	17.4	30
800×600×250	51	72	95	120	48	68	90	113	44	64	84	105	29.8	21.2	40
1000×600×250	49	69	91	115	45	65	85	107	43	62	82	103	35.4	25.3	63
1200×600×250	55	78	103	130	52	74	97	122	49	71	94	117	40.7	29.1	75
1400×600×250	62	88	116	146	57	81	107	135	53	76	100	126	46.5	33.4	85
1600×600×250	71	102	135	169	66	95	125	157	62	89	117	147	51.9	37.2	95
1800×600×250	84	119	158	198	76	109	144	181	71	101	134	168	57.6	41.4	120
2000×600×250	94	134	176	221	87	125	165	207	81	116	153	191	63.2	45.4	130
600×800×250	54	77	102	128	52	74	97	122	49	70	92	116	29.9	21.1	45
800×800×250	55	79	104	130	53	75	99	125	51	73	97	121	36.2	25.4	61
1000×800×250	64	92	121	152	61	87	115	144	59	85	112	140	42.9	30	95
1200×800×250	75	107	142	178	71	102	135	169	68	98	129	162	49.3	34.4	112
1400×800×250	88	126	166	208	82	117	155	194	78	111	147	184	56.1	39.2	129
1600×800×250	98	141	186	233	93	133	176	221	89	128	169	212	62.5	43.5	145
1800×800×250	107	153	201	253	101	145	191	240	96	138	182	229	69.2	48.2	180
2000×800×250	119	170	225	282	113	162	214	268	109	156	206	259	75.7	52.7	195

Subdistribution boards

System pro E® energy M

Power loss and weights of cabinets

Type of installation
Separate cabinet wall mounted



Type of installation
First or last cabinet wall mounted

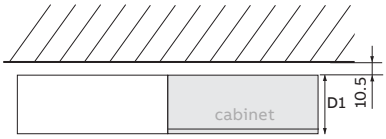

Type of installation
Central cabinet wall mounted

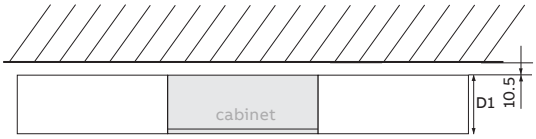

Cabinet types Height×Width×Depth in mm	Power loss in Watt												Cabinet weight in kg		Max. installation weight in kg
	Separate cabinet wall mounted				First or last cabinet wall mounted				Central cabinet wall mounted						
	25 °C	30 °C	35 °C	40 °C	25 °C	30 °C	35 °C	40 °C	25 °C	30 °C	35 °C	40 °C	With door	Without door	
600×400×250	31	45	59	74	33	47	62	77	30	44	57	72	19.3	14.2	15
800×400×250	38	55	72	91	40	57	76	95	37	53	70	88	23.4	17.2	20
1000×400×250	45	65	86	107	47	68	90	113	44	63	83	104	27.9	20.6	31
1200×400×250	38	55	72	91	40	58	76	95	37	53	70	87	32.4	24	37
1400×400×250	45	64	85	106	47	67	88	111	43	62	82	103	36.9	27.4	43
1600×400×250	51	73	97	121	54	77	102	128	49	70	93	116	41.3	30.7	48
1800×400×250	59	85	112	140	63	89	118	148	56	80	106	133	46.0	34.3	60
2000×400×250	67	96	126	158	71	101	134	168	64	91	121	151	50.3	37.5	72
600×600×250	42	60	80	100	40	57	75	94	37	51	71	89	24.2	17.2	30
800×600×250	51	72	95	120	48	68	90	113	44	64	84	105	29.3	20.7	40
1000×600×250	49	69	91	115	45	65	85	107	43	62	82	103	34.8	24.7	63
1200×600×250	55	78	103	130	52	74	97	122	49	71	94	117	40.1	28.5	75
1400×600×250	62	88	116	146	57	81	107	135	53	76	100	126	45.5	32.4	85
1600×600×250	71	102	135	169	66	95	125	157	62	89	117	147	50.9	36.2	95
1800×600×250	84	119	158	198	76	109	144	181	71	101	134	168	56.9	40.7	120
2000×600×250	94	134	176	221	87	125	165	207	81	116	153	191	61.9	44.1	130
600×800×250	54	77	102	128	52	74	97	122	49	70	92	116	29.4	20.6	45
800×800×250	55	79	104	130	53	75	99	125	51	73	97	121	35.4	24.6	61
1000×800×250	64	92	121	152	61	87	115	144	59	85	112	140	41.9	29	95
1200×800×250	75	107	142	178	71	102	135	169	68	98	129	162	48.3	33.4	112
1400×800×250	88	126	166	208	82	117	155	194	78	111	147	184	54.7	37.8	129
1600×800×250	98	141	186	233	93	133	176	221	89	128	169	212	61.2	42.2	145
1800×800×250	107	153	201	253	101	145	191	240	96	138	182	229	67.7	46.7	180
2000×800×250	119	170	225	282	113	162	214	268	109	156	206	259	74.1	51.1	195

Subdistribution boards

System pro E® energy L and M

Plain Doors – Dimensions and weights

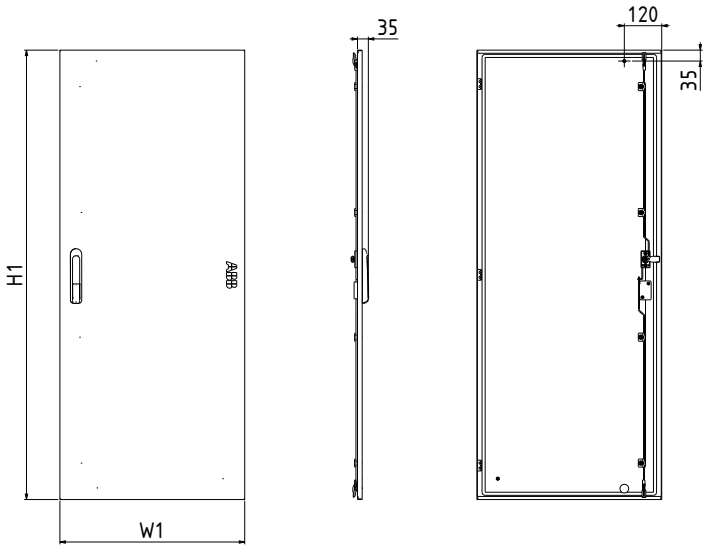

Sheet steel doors	External dimensions Height×Width in mm		Internal dimensions Height×Width in mm		Weight	Max. installation weight
Type	H1	W1	H2	W2	in kg	in kg
Q855D406	642	377	468	190	5.1	5.0
Q855D408	842	377	668	190	6.2	5.0
Q855D410	1042	377	868	190	7.3	5.0
Q855D412	1242	377	1068	190	8.4	5.0
Q855D414	1442	377	1268	190	9.5	5.0
Q855D416	1642	377	1468	190	10.6	5.0
Q855D418	1842	377	1668	190	11.7	5.0
Q855D420	2042	377	1868	190	12.8	5.0
Q855D606	642	593	468	406	7.0	5.0
Q855D608	842	593	668	406	8.6	5.0
Q855D610	1042	593	868	406	10.1	5.0
Q855D612	1242	593	1068	406	11.6	5.0
Q855D614	1442	593	1268	406	13.1	5.0
Q855D616	1642	593	1468	406	14.7	5.0
Q855D618	1842	593	1668	406	16.2	5.0
Q855D620	2042	593	1868	406	17.8	5.0
Q855D806	642	809	468	622	8.8	7.5
Q855D808	842	809	668	622	10.8	7.5
Q855D810	1042	809	868	622	12.9	7.5
Q855D812	1242	809	1068	622	14.9	7.5
Q855D814	1442	809	1268	622	16.9	7.5
Q855D816	1642	809	1468	622	19.0	7.5
Q855D818	1842	809	1668	622	21.0	7.5
Q855D820	2042	809	1868	622	23.0	7.5

Subdistribution boards

System pro E® energy L and M

Transparent Doors – Dimensions and weights

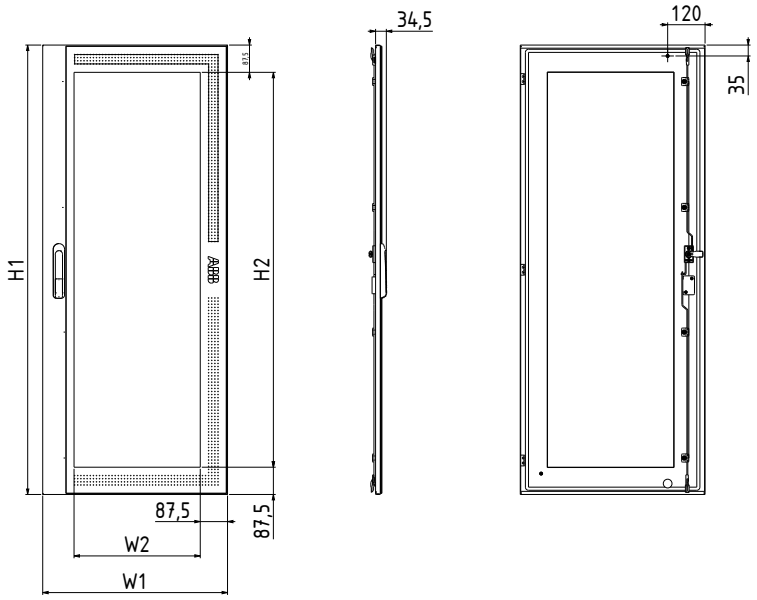

Transparent doors	External dimensions Height×Width in mm		Internal dimensions Height×Width in mm		Weight	Max. installation weight
Type	H1	W1	H2	W2	in kg	in kg
Q855G406	642	377	468	190	5.1	5.0
Q855G408	842	377	668	190	6.2	5.0
Q855G410	1042	377	868	190	7.3	5.0
Q855G412	1242	377	1068	190	8.4	5.0
Q855G414	1442	377	1268	190	9.5	5.0
Q855G416	1642	377	1468	190	10.6	5.0
Q855G418	1842	377	1668	190	11.7	5.0
Q855G420	2042	377	1868	190	12.8	5.0
Q855G606	642	593	468	406	7.0	5.0
Q855G608	842	593	668	406	8.6	5.0
Q855G610	1042	593	868	406	10.1	5.0
Q855G612	1242	593	1068	406	11.6	5.0
Q855G614	1442	593	1268	406	13.1	5.0
Q855G616	1642	593	1468	406	14.7	5.0
Q855G618	1842	593	1668	406	16.2	5.0
Q855G620	2042	593	1868	406	17.8	5.0
Q855G806	642	809	468	622	8.8	7.5
Q855G808	842	809	668	622	10.8	7.5
Q855G810	1042	809	868	622	12.9	7.5
Q855G812	1242	809	1068	622	14.9	7.5
Q855G814	1442	809	1268	622	16.9	7.5
Q855G816	1642	809	1468	622	19.0	7.5
Q855G818	1842	809	1668	622	21.0	7.5
Q855G820	2042	809	1868	622	23.0	7.5

Subdistribution boards

System pro E® energy L and M

Mounting plates

External dimensions / Usable connection area
Mounting plate

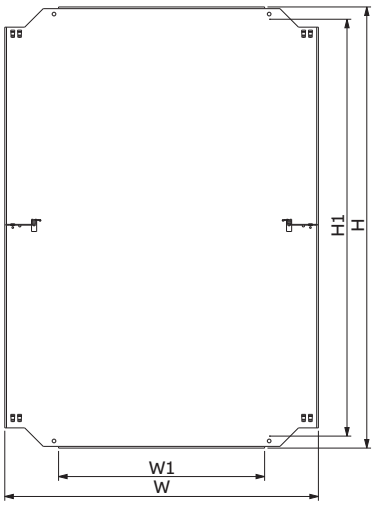

Transparent doors	External dimensions Height×Width in mm		Useable area Height×Width in mm		Weight
Type	W	W1	H	H1	in kg
QM0403000	335	146	275	235	1.4
QM0601500	551	362	125	85	1.1
QM0602000	551	362	175	135	1.5
QM0602500	551	362	250	185	2.0
QM0603000	551	362	275	235	2.4
QM0604000	551	362	375	335	3.4
QM0605000	551	362	475	435	4.2
QM0606000	551	362	575	535	5.2
QM0608000	551	362	775	735	6.9
QM0609000	551	362	875	835	7.8
QM0610000	551	362	975	935	8.7
QM0801500	767	578	125	85	1.6
QM0802000	767	578	175	135	2.2
QM0802500	767	578	250	185	2.9
QM0803000	767	578	275	235	3.5
QM0804000	767	578	375	335	4.7
QM0805000	767	578	475	435	5.9
QM0806000	767	578	575	535	7.2
QM0808000	767	578	775	735	9.6
QM0809000	767	578	875	835	10.8
QM0810000	767	578	975	935	12.1

Subdistribution boards

System pro E® energy L and M

Stackable plinth

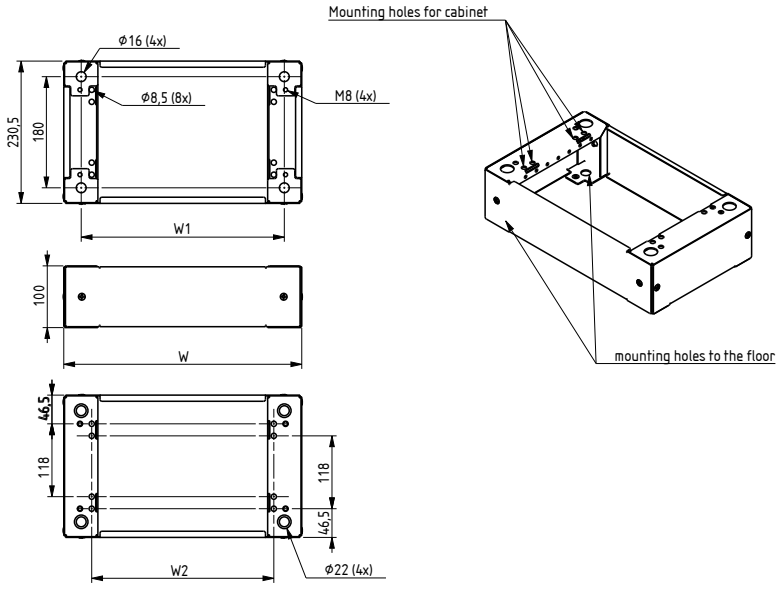

Standard plinth

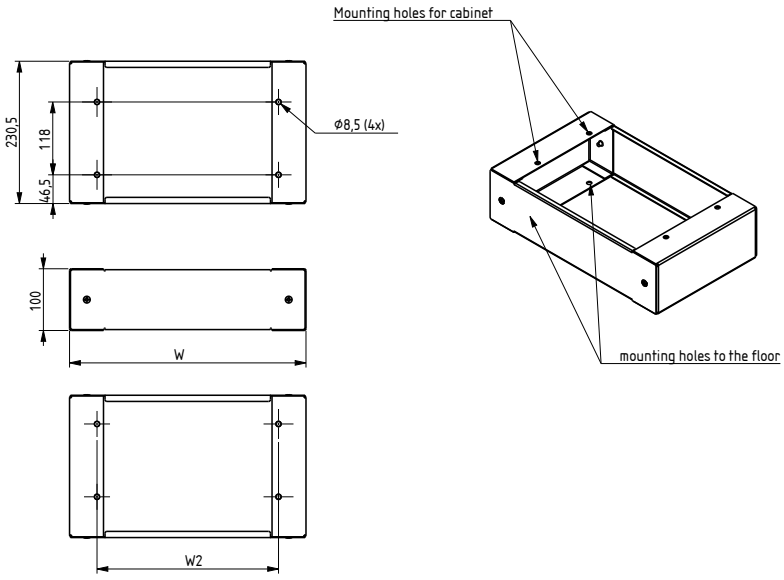

	External dimensions Width×Depth in mm		Internal dimensions Width×Depth in mm	Weight
Type	**W**	**W1**	**W2**	**in kg**
Q855P401	386	327	295	2.6
Q855P601	602	543	511	3.2
Q855P801	816	759	727	3.6

Subdistribution boards

System pro E® energy L

Top and Bottom views

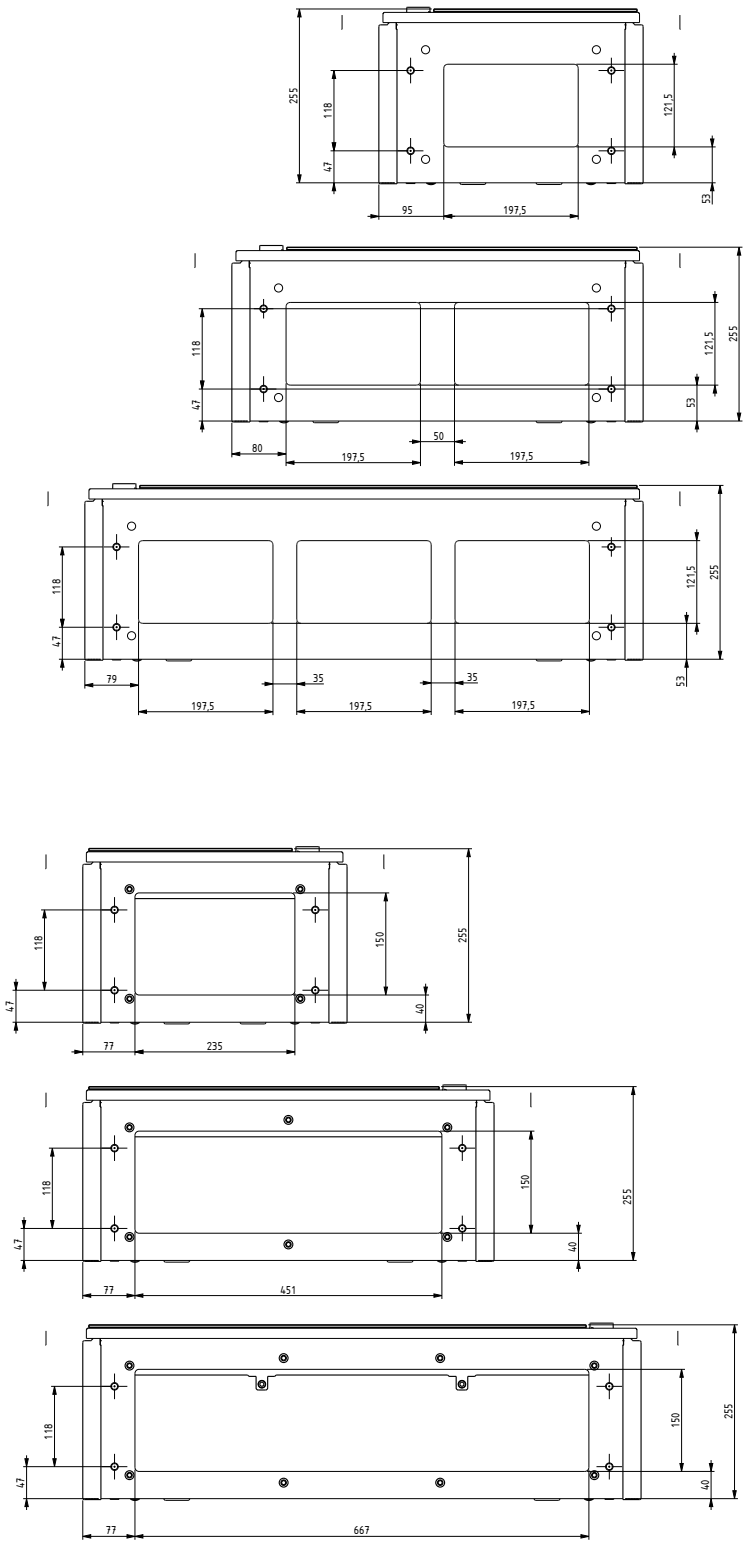

Subdistribution boards

System pro E® energy M

Top and Bottom views

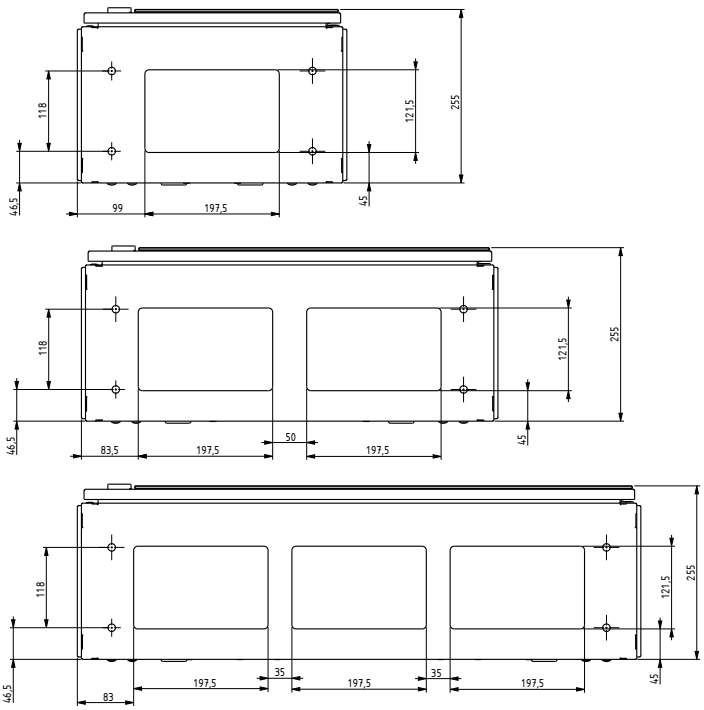

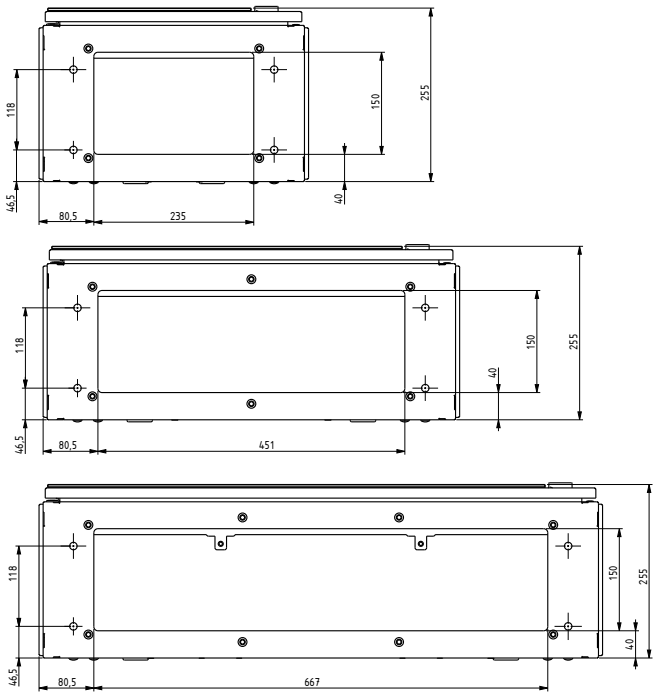

Subdistribution boards

System pro E® energy L

Side View

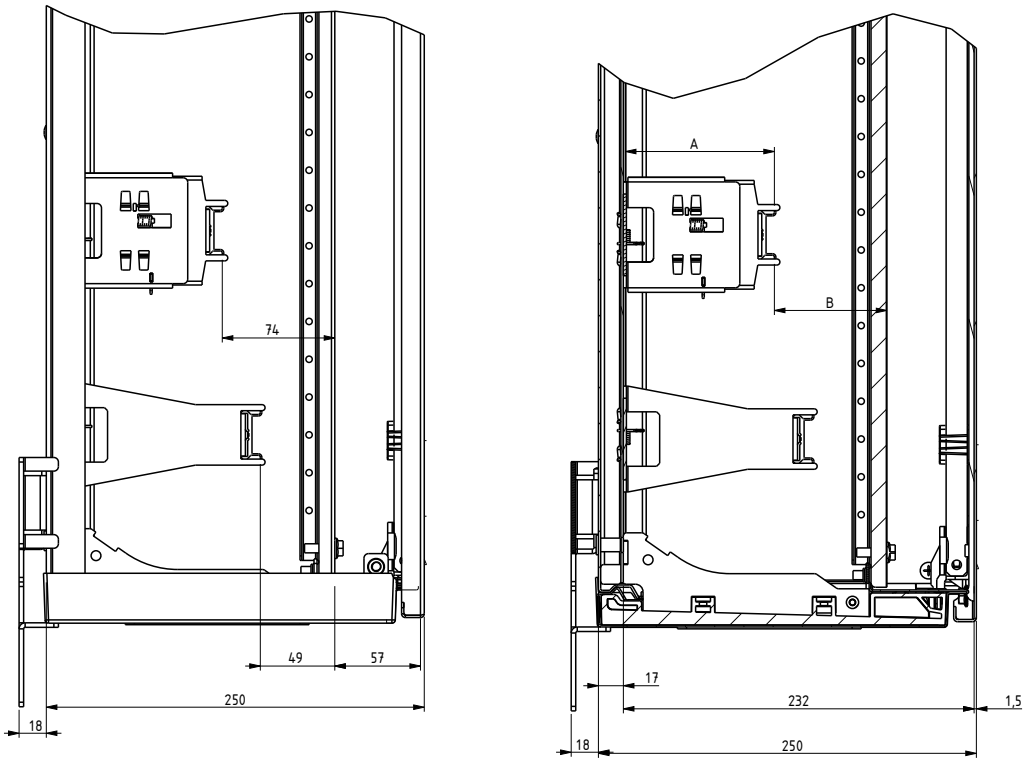

Pos 1 (upper pos)
A = 124mm
B = 49mm

Pos 2
A = 109mm
B = 64mm

Pos 3
A = 99mm
B = 74mm

Pos 4
A = 89mm
B = 84mm

Pos 5
A = 79mm
B = 94mm

Subdistribution boards

System pro E® energy M

Side View

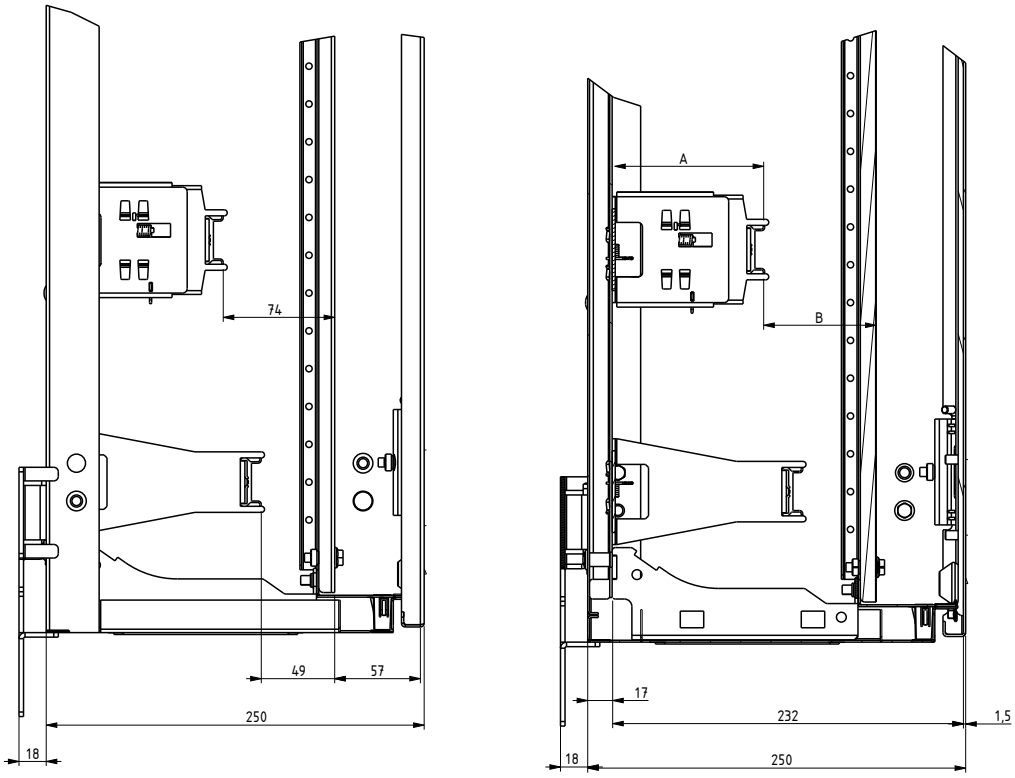

Pos 1 (upper pos)
A = 124mm
B = 49mm

Pos 2
A = 109mm
B = 64mm

Pos 3
A = 99mm
B = 74mm

Pos 4
A = 89mm
B = 84mm

Pos 5
A = 79mm
B = 94mm

Subdistribution boards

System pro E® energy L

Internal cable container

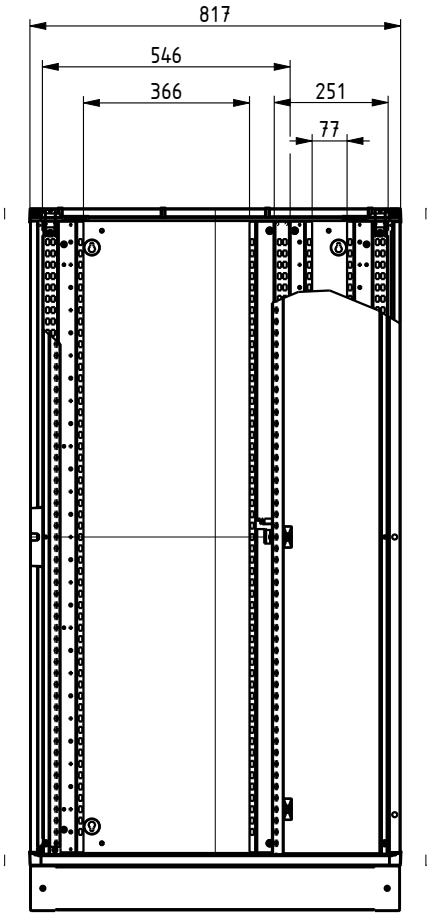

Subdistribution boards

System pro E® energy M

Internal cable container

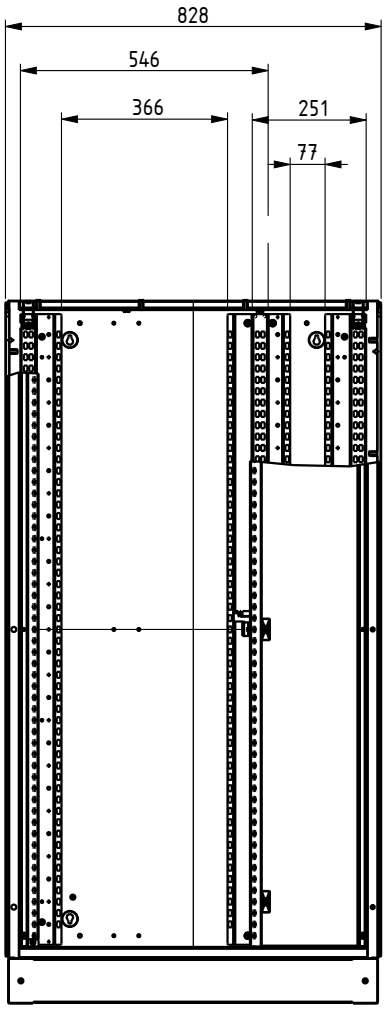

Subdistribution boards

System pro E® energy L

Dimensions of side-by-side cabinets

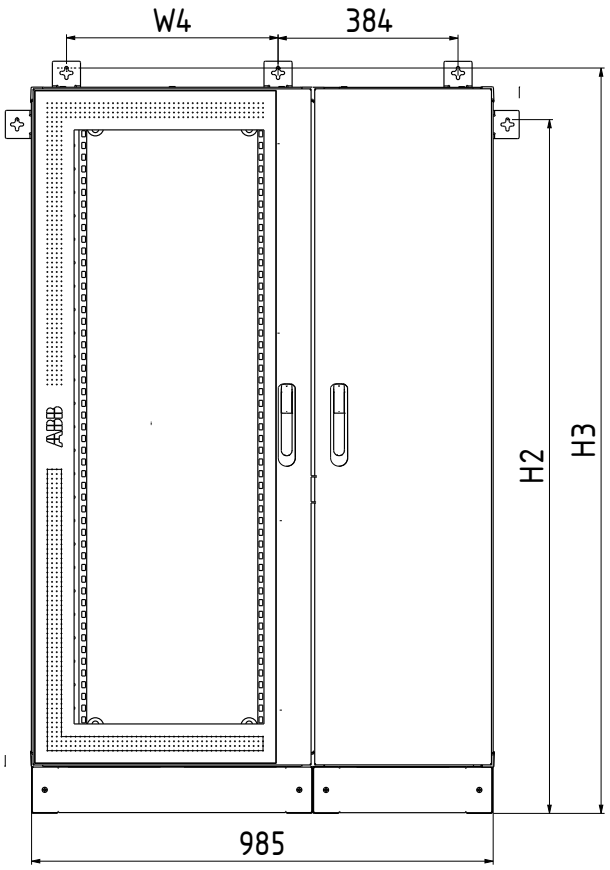

Subdistribution boards

System pro E® energy M

Dimensions of side-by-side cabinets

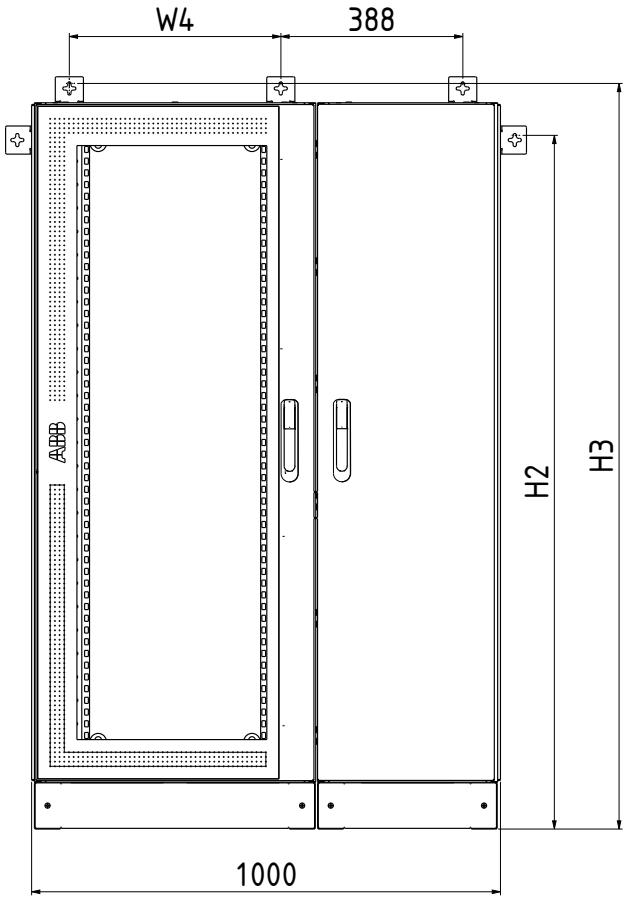

—
Lifting of the System pro E® energy is possible as indicated. Always use the ABB transportation lugs type ESAC3006P4 and for side-by-side structures lifting, use the reinforcement. Also consider the weight limits of the cabinets.

max. 150 kg

max. 180 kg

max. 420 kg

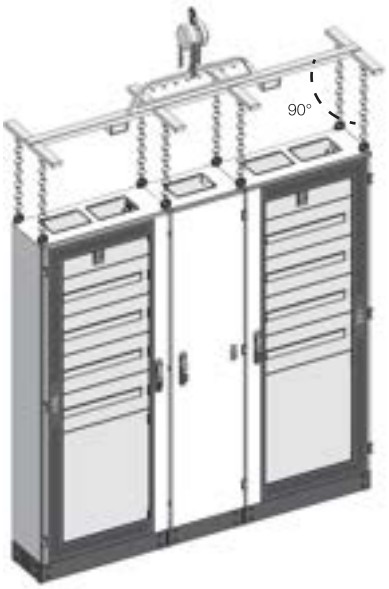

max. cabinet combinations
800 + 400 + 800 mm, wide cabinets

System pro E® energy M

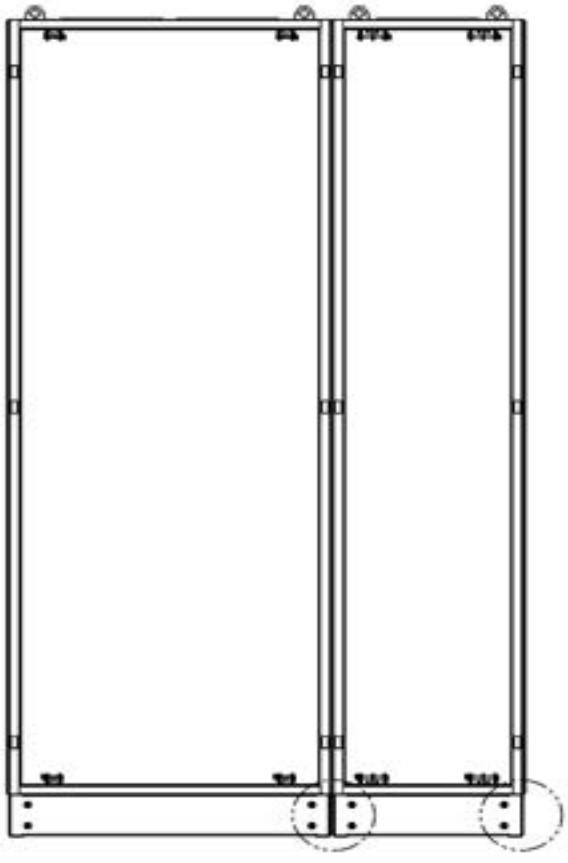

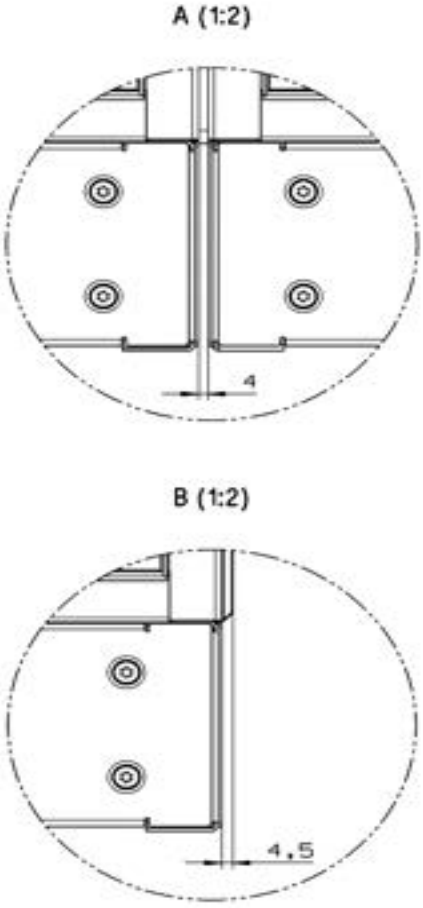

Subdistribution boards

System pro E® energy L and M

Configuration examples

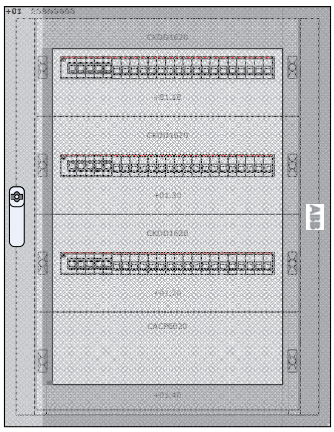

System pro E® energy L - IP43

Panel (800 × 600 × 250 mm)

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinets: Back + Side panels W600 H800	Q843B608	1SZE430800B0100		1
Top & Bottom plain w/ pre-knock-out W600	Q843T611	1SZE430802B0011		1
Top & Bottom BIG Entry space W600	Q843T621	1SZE430802B0014		1
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		1
Door transparent W600 H800	Q855G608	1SZE990920B0100		1
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		3
Cover plain W600 H200	QCC062001	1SZE980010B0150		1

System pro E® energy M - IP55

Panel (800 × 600 × 250 mm)

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinet: Monoblock enclosure W600 H800	Q855B608	1SZE550800B0100		1
Side wall System pro E energy M H800	Q855S008	1SZE550801B0020		1
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		1
Door transparent W600 H800	Q855G608	1SZE990920B0100		1
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		3
Cover plain W600 H200	QCC062001	1SZE980010B0150		1

Subdistribution boards

System pro E® energy L and M

Configuration examples

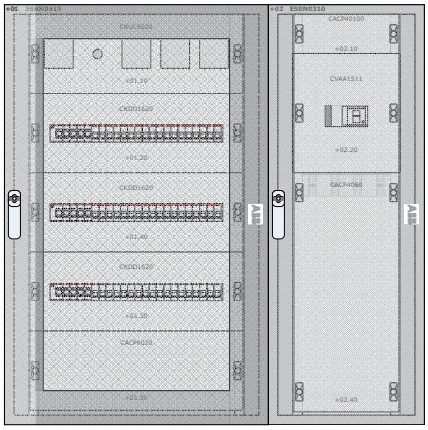

System pro E® energy L - IP43

Panel (1000 × 600 × 250 mm + 1000 × 400 × 250 mm)

System pro E® Combi with busbar 250 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinets: Back + Side panels W600 H1000	Q843B610	1SZE430800B0110		1
Ext: Back + Coupling profiles W400 H1000	Q843E410	1SZE430801B0030		1
Top & Bottom plain w/ pre-knock-out W600	Q843T611	1SZE430802B0011		1
Top & Bottom BIG Entry space W600	Q843T621	1SZE430802B0014		1
Top & Bottom plain w/ pre-knock-out W400	Q843T411	1SZE430802B0010		2
Flange for 52 entries	TZ101	2CPX010450R9999		2
Flange 1 cable sl. 14-68mm	TZ112	2CPX010852R9999		1
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		1
Door transparent W600 H1000	Q855G610	1SZE990920B0110		1
Door transparent W400 H1000	Q855G410	1SZE990920B0030		1
Cover plain W600 H50	QCC060501	1SZE980010B0120		1
Meter cover plates 96x96 W600 H150	QCM961500	1SZE980090B0040		1
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		3
Cover plain W600 H200	QCC062001	1SZE980010B0150		1
Cover plain W400 H100	QCC041001	1SZE980010B0020		1
Tmax XT3 3/4p Vert W400 H300	QB3V43000	1SZE980040B0030		1
Cover plain W400 H600	QCC046001	1SZE980010B0090		1
Busbar holder V. 200/400 W Flat/Stairc.	QR6V4FS01	1SZE980120B0070		3
Flat busbar 20x5 H2000 M.6	QR02F2005	1SZE980120B0460		1

System pro E® energy M - IP55

Panel (1000 × 600 × 250 mm + 1000 × 400 × 250 mm)

System pro E® Combi with busbar 250 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinet: Monoblock enclosure W600 H1000	Q855B610	1SZE550800B0110		1
Cabinet: Monoblock enclosure W400 H1000	Q855B410	1SZE550800B0030		1
Side wall System pro E energy M H1000	Q855S010	1SZE550801B0030		1
Cabinet Connection set for Wall IP55	Q855E00W	1SZE550800B0310		1
Flange for 52 entries	TZ101	2CPX010450R9999		2
Flange 1 cable sl. 14-68mm	TZ112	2CPX010852R9999		1
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		1
Door transparent W600 H1000	Q855G610	1SZE990920B0110		1
Door transparent W400 H1000	Q855G410	1SZE990920B0030		1
Cover plain W600 H50	QCC060501	1SZE980010B0120		1
Meter cover plates 96x96 W600 H150	QCM961500	1SZE980090B0040		1
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		3
Cover plain W600 H200	QCC062001	1SZE980010B0150		1
Cover plain W400 H100	QCC041001	1SZE980010B0020		1
Tmax XT3 3/4p Vert W400 H300	QB3V43000	1SZE980040B0030		1
Cover plain W400 H600	QCC046001	1SZE980010B0090		1
Busbar holder V. 200/400 W Flat/Stairc.	QR6V4FS01	1SZE980120B0070		3
No.2 flat busbar 250 A	BR0250			1

Subdistribution boards

System pro E® energy L and M

Configuration examples

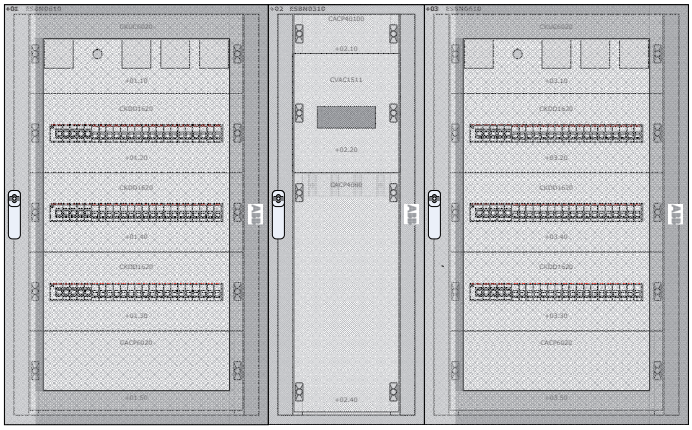

System pro E® energy L - IP43

Panel (1000 × 600 × 250 mm + 1000 × 400 × 250 mm+ 100 × 600× 250 mm)

System pro E® Combi with busbar 250 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinets: Back + Side panels W600 H1000	Q843B610	1SZE430800B0110		1
Ext: Back + Coupling profiles W400 H1000	Q843E410	1SZE430801B0030		1
Ext: Back + Coupling profiles W600 H1000	Q843E610	1SZE430801B0110		1
Top & Bottom plain w/ pre-knock-out W600	Q843T611	1SZE430802B0011		2
Top & Bottom BIG Entry space W600	Q843T621	1SZE430802B0014		2
Top & Bottom plain w/ pre-knock-out W400	Q843T411	1SZE430802B0010		2
Flange for 52 entries	TZ101	2CPX010450R9999		4
Flange 1 cable sl. 14-68mm	TZ112	2CPX010852R9999		1
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		2
Door transparent W600 H1000	Q855G610	1SZE990920B0110		2
Door transparent W400 H1000	Q855G410	1SZE990920B0030		1
Cover plain W600 H50	QCC060501	1SZE980010B0120		2
Meter cover plates 96x96 W600 H150	QCM961500	1SZE980090B0040		2
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		6
Cover plain W600 H200	QCC062001	1SZE980010B0150		2
Cover plain W400 H100	QCC041001	1SZE980010B0020		1
Tmax XT3 3/4p Vert W400 H300	QB3V43000	1SZE980040B0030		1
Cover plain W400 H600	QCC046001	1SZE980010B0090		1
Busbar holder V. 200/400 W Flat/Stairc.	QR6V4FS01	1SZE980120B0070		3
No.2 flat busbar 250 A	BR0250			1

System pro E® energy M - IP55

Panel (1000 × 600 × 250 mm + 1000 × 400 × 250 mm+ 100 × 600× 250 mm)

System pro E® Combi with busbar 250 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinet: Monoblock enclosure W600 H1000	Q855B610	1SZE550800B0110		2
Cabinet: Monoblock enclosure W400 H1000	Q855B410	1SZE550800B0030		1
Side wall System pro E energy M H1000	Q855S010	1SZE550801B0030		1
Cabinet Connection set for Wall IP55	Q855E00W	1SZE550800B0310		2
Flange for 52 entries	TZ101	2CPX010450R9999		4
Flange 1 cable sl. 14-68mm	TZ112	2CPX010852R9999		1
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		2
Door transparent W600 H1000	Q855G610	1SZE990920B0110		2
Door transparent W400 H1000	Q855G410	1SZE990920B0030		1
Cover plain W600 H50	QCC060501	1SZE980010B0120		2
Meter cover plates 96x96 W600 H150	QCM961500	1SZE980090B0040		2
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		6
Cover plain W600 H200	QCC062001	1SZE980010B0150		2
Cover plain W400 H100	QCC041001	1SZE980010B0020		1
Tmax XT3 3/4p Vert W400 H300	QB3V43000	1SZE980040B0030		1
Cover plain W400 H600	QCC046001	1SZE980010B0090		1
Busbar holder V. 200/400 W Flat/Stairc.	QR6V4FS01	1SZE980120B0070		3
No.2 flat busbar 250 A	BR0250			1

Subdistribution boards

System pro E® energy L and M

Configuration examples

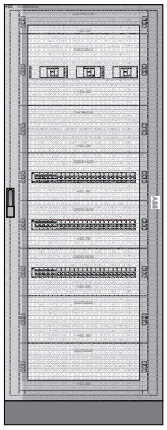

System pro E® energy L - IP43

Panel (1600 × 600 × 250 mm)

System pro E® Combi with busbar 250 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinets: Back + Side panels W600 H1600	Q843B616	1SZE430800B0140		1
Top & Bottom plain w/ pre-knock-out W600	Q843T611	1SZE430802B0011		1
Top & Bottom BIG Entry space W600	Q843T621	1SZE430802B0014		1
Flange for 52 entries	TZ101	2CPX010450R9999		2
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		1
Door transparent W600 H1600	Q855G616	1SZE990920B0140		1
Plinth 100 mm height W600	Q855P601	1SZE990940B0020		1
Cover plain W600 H50	QCC060501	1SZE980010B0120		1
Meter cover plates 96x96 W600 H150	QCM961500	1SZE980090B0040		1
3 Tmax XT2 3/4p Vert W600 H300	QB2V63003	1SZE980040B0260		1
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		3
Cover plain W600 H200	QCC062001	1SZE980010B0150		1
Tmax XT4 3/4p Vert W600 H300	QB4V63000	1SZE980040B0120		1
Busbar holder Vert. 600 W Flat/linear	QR6V6FF01	1SZE980120B0030		3
Flat busbar 20x5 H2000 M.6	QR02F2005	1SZE980120B0460		3

System pro E® energy M - IP55

Panel (1600 × 600 × 250 mm)

System pro E® Combi with busbar 250 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinet: Monoblock enclosure W600 H1600	Q855B616	1SZE550800B0140		1
Side wall System pro E energy M H1600	Q855S016	1SZE550801B0060		1
Flange for 52 entries	TZ101	2CPX010450R9999		2
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		1
Door transparent W600 H1600	Q855G616	1SZE990920B0140		1
Plinth 100 mm height W600	Q855P601	1SZE990940B0020		1
Cover plain W600 H50	QCC060501	1SZE980010B0120		1
Meter cover plates 96x96 W600 H150	QCM961500	1SZE980090B0040		1
3 Tmax XT2 3/4p Vert W600 H300	QB2V63003	1SZE980040B0260		1
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		3
Cover plain W600 H200	QCC062001	1SZE980010B0150		1
Tmax XT4 3/4p Vert W600 H300	QB4V63000	1SZE980040B0120		1
Cover plain W600 H100	QCC061001	1SZE980010B0130		1
Busbar holder Vert. 600 W Flat/linear	QR6V6FF01	1SZE980120B0030		3
Flat busbar 20x5 H2000 M.6	QR02F2005	1SZE980120B0460		3

Subdistribution boards

System pro E® energy L and M

Configuration examples

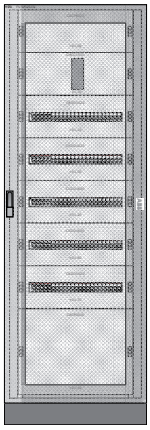

System pro E® energy L - IP43

Panel (1800 × 600 × 250 mm)

System pro E® Combi with busbar 250 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinets: Back + Side panels W600 H1800	Q843B618	1SZE430800B0150		1
Top & Bottom plain w/ pre-knock-out W600	Q843T611	1SZE430802B0011		1
Top & Bottom BIG Entry space W600	Q843T621	1SZE430802B0014		1
Flange for 52 entries	TZ101	2CPX010450R9999		2
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		1
Door transparent W600 H1800	Q855G618	1SZE990920B0150		1
Plinth 100 mm height W600	Q855P601	1SZE990940B0020		1
Cover plain W600 H200	QCC062001	1SZE980010B0150		1
Tmax XT2 3/4p Hor W600 H200	QB2H62000	1SZE980040B0340		1
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		5
Cover plain W600 H400	QCC064001	1SZE980010B0180		1
Busbar holder Vert. 600 W Flat/linear	QR6V6FF01	1SZE980120B0030		4
Flat busbar 20x5 H2000 M.6	QR02F2005	1SZE980120B0460		3

System pro E® energy M - IP55

Panel (1800 × 600 × 250 mm)

System pro E® Combi with busbar 250 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinet: Monoblock enclosure W600 H1800	Q855B618	1SZE550800B0150		1
Side wall System pro E energy M H1800	Q855S018	1SZE550801B0070		1
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		1
Flange for 52 entries	TZ101	2CPX010450R9999		2
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		1
Door transparent W600 H1800	Q855G618	1SZE990920B0150		1
Plinth 100 mm height W600	Q855P601	1SZE990940B0020		1
Cover plain W600 H200	QCC062001	1SZE980010B0150		1
Tmax XT2 3/4p Hor W600 H200	QB2H62000	1SZE980040B0340		1
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		5
Cover plain W600 H400	QCC064001	1SZE980010B0180		1
Busbar holder Vert. 600 W Flat/linear	QR6V6FF01	1SZE980120B0030		4
Flat busbar 20x5 H2000 M.6	QR02F2005	1SZE980120B0460		3

Subdistribution boards

System pro E® energy L and M

Configuration examples

System pro E® energy L - IP43

Panel (1800 × 600 × 250 mm + 1800 × 600 × 250 mm)

System pro E® Combi with busbar 630 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinets: Back + Side panels W600 H1800	Q843B618	1SZE430800B0150		1
Ext: Back + Coupling profiles W600 H1800	Q843E618	1SZE430801B0150		1
Top & Bottom plain w/ pre-knock-out W600	Q843T611	1SZE430802B0011		2
Top & Bottom BIG Entry space W600	Q843T621	1SZE430802B0014		2
Flange for 52 entries	TZ101	2CPX010450R9999		4
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		2
Door transparent W600 H1800	Q855G618	1SZE990920B0150		2
Plinth 100 mm height W600	Q855P601	1SZE990940B0020		2
Cover plain W600 H200	QCC062001	1SZE980010B0150		2
Tmax XT2 3/4p Hor W600 H200	QB2H62000	1SZE980040B0340		2
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		10
Cover plain W600 H400	QCC064001	1SZE980010B0180		2
Busbar holder Vert. 600 W Flat/linear	QR6V6FF01	1SZE980120B0030		8
Flat busbar 20x5 H2000 M.6	QR02F2005	1SZE980120B0460		1

System pro E® energy M - IP55

Panel (1800 × 600 × 250 mm + 1800 × 600 × 250 mm)

System pro E® Combi with busbar 630 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinet: Monoblock enclosure W600 H1800	Q855B618	1SZE550800B0150		2
Coupling set for Floorstanding IP55	Q855E00F	1SZE550800B0320		1
Side wall System pro E energy M H1800	Q855S018	1SZE550801B0070		1
Flange for 52 entries	TZ101	2CPX010450R9999		4
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		2
Door transparent W600 H1800	Q855G618	1SZE990920B0150		2
Plinth 100 mm height W600	Q855P601	1SZE990940B0020		2
Cover plain W600 H200	QCC062001	1SZE980010B0150		2
Tmax XT2 3/4p Hor W600 H200	QB2H62000	1SZE980040B0340		2
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		10
Cover plain W600 H400	QCC064001	1SZE980010B0180		2
Busbar holder Vert. 600 W Flat/linear	QR6V6FF01	1SZE980120B0030		8
Flat busbar 20x5 H2000 M.6	QR02F2005	1SZE980120B0460		1

Subdistribution boards

System pro E® energy L and M

Configuration examples

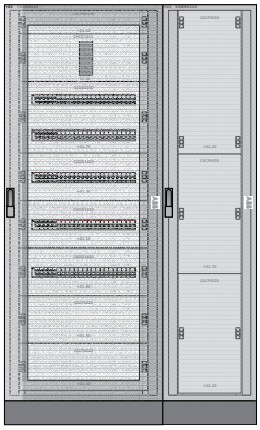

System pro E® energy L - IP55

Panel (1800 × 600 × 250 mm + 1800 × 400 × 250 mm)

System pro E® Combi with busbar 630 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinets: Back + Side panels W600 H1800	Q843B618	1SZE430800B0150		1
Ext: Back + Coupling profiles W400 H1800	Q843E418	1SZE430801B0070		1
Top & Bottom plain w/ pre-knock-out W600	Q843T611	1SZE430802B0011		2
Top & Bottom BIG Entry space W600	Q843T621	1SZE430802B0014		2
Top & Bottom plain w/ pre-knock-out W400	Q843T411	1SZE430802B0010		2
Flange for 52 entries	TZ101	2CPX010450R9999		2
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		1
Door transparent W600 H1800	Q855G618	1SZE990920B0150		1
Door plain W400 H1800	Q855D418	1SZE990910B0070		1
Plinth 100 mm height W600	Q855P601	1SZE990940B0020		2
Plinth 100 mm height W400	Q855P401	1SZE990940B0010		2
Cover plain W600 H200	QCC062001	1SZE980010B0150		1
Tmax XT2 3/4p Hor W600 H200	QB2H62000	1SZE980040B0340		1
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		5
Cover plain W600 H400	QCC064001	1SZE980010B0180		2
Cover plain W400 H600	QCC046001	1SZE980010B0090		3
Busbar holder V. 200/400 W Shaped/Stairc	QR8V4SS01	1SZE980120B0060		6
No.2 shaped busbar 400 A	BA0400			4

System pro E® energy M - IP55

Panel (1800 × 600 × 250 mm + 1800 × 400 × 250 mm)

System pro E® Combi with busbar 630 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinet: Monoblock enclosure W600 H1800	Q855B618	1SZE550800B0150		1
Cabinet: Monoblock enclosure W400 H1800	Q855B418	1SZE550800B0070		1
Side wall System pro E energy M H1800	Q855S018	1SZE550801B0070		1
Coupling set for Floorstanding IP55	Q855E00F	1SZE550800B0320		1
Flange for 52 entries	TZ101	2CPX010450R9999		2
Flange metal TL Flange W600	Q855F621	1SZE990900B0021		1
Door transparent W600 H1800	Q855G618	1SZE990920B0150		1
Door plain W400 H1800	Q855D418	1SZE990910B0070		1
Plinth 100 mm height W600	Q855P601	1SZE990940B0020		2
Plinth 100 mm height W400	Q855P401	1SZE990940B0010		2
Cover plain W600 H200	QCC062001	1SZE980010B0150		2
Tmax XT2 3/4p Hor W600 H200	QB2H62000	1SZE980040B0340		2
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		10
Cover plain W600 H400	QCC064001	1SZE980010B0180		2
Cover plain W400 H600	QCC046001	1SZE980010B0090		3
Busbar holder V. 200/400 W Shaped/Stairc	QR8V4SS01	1SZE980120B0060		6
No.2 shaped busbar 400 A	BA0400			4

Subdistribution boards

System pro E® energy L and M

Configuration examples

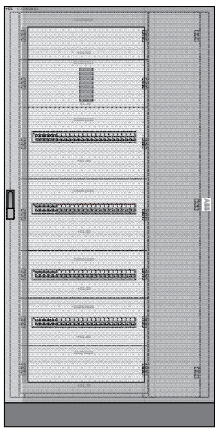

System pro E® energy L - IP43

Panel (1800 × 800 × 250 mm with integrated cable compartment)

System pro E® Combi with busbar 250 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinets: Back + Side panels W800 H1800	Q843B818	1SZE430800B0230		1
Integrated cable compartment H1800	Q830I218	1SZE990930B0070		1
Top & Bottom plain w/ pre-knock-out W800	Q843T811	1SZE430802B0012		1
Top & Bottom BIG Entry space W800	Q843T821	1SZE430802B0015		1
Flange for 52 entries	TZ101	2CPX010450R9999		3
Flange metal TL Flange W800	Q855F821	1SZE990900B0031		1
Door transparent W800 H1800	Q855G818	1SZE990920B0230		1
Plinth 100 mm height W800	Q855P801	1SZE990940B0030		2
Cover plain W600 H100	QCC061001	1SZE980010B0130		1
3 Tmax XT2 3/4p Vert W600 H300	QB2V63003	1SZE980040B0260		1
Cover plain W600 H100	QCC061001	1SZE980010B0130		1
Kit DIN 2R W600 H300	QDS263000	1SZE980020B0080		2
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		2
Cover plain W600 H300	QCC063001	1SZE980010B0170		1
Busbar holder V. 200/400 W Shaped/Stairc	QR8V4SS01	1SZE980120B0060		6
No.2 shaped busbar 400 A	BA0400			4

System pro E® energy M - IP55

Panel (1800 × 800 × 250 mm with integrated cable compartment)

System pro E® Combi with busbar 250 A

	Order details			
Description	**Type**	**Order code**	**Price**	**Pcs.**
Cabinet: Monoblock enclosure W800 H1800	Q855B818	1SZE550800B0230		1
Integrated cable compartment H1800	Q830I218	1SZE990930B0070		1
Side wall System pro E energy M H1800	Q855S018	1SZE550801B0070		1
Flange for 52 entries	TZ101	2CPX010450R9999		3
Flange metal TL Flange W800	Q855F821	1SZE990900B0031		1
Door transparent W800 H1800	Q855G818	1SZE990920B0230		1
Plinth 100 mm height W800	Q855P801	1SZE990940B0030		2
Cover plain W600 H100	QCC061001	1SZE980010B0130		1
3 Tmax XT2 3/4p Vert W600 H300	QB2V63003	1SZE980040B0260		1
Cover plain W600 H100	QCC061001	1SZE980010B0130		1
Kit DIN 2R W600 H300	QDS263000	1SZE980020B0080		2
Kit DIN 1R W600 H200	QDS162000	1SZE980020B0060		3
Cover plain W600 H300	QCC063001	1SZE980010B0170		1
Busbar holder V. 200/400 W Shaped/Stairc	QR8V4SS01	1SZE980120B0060		6
No.2 shaped busbar 400 A	BA0400			4

Subdistribution boards

System pro E® energy PB

System overview

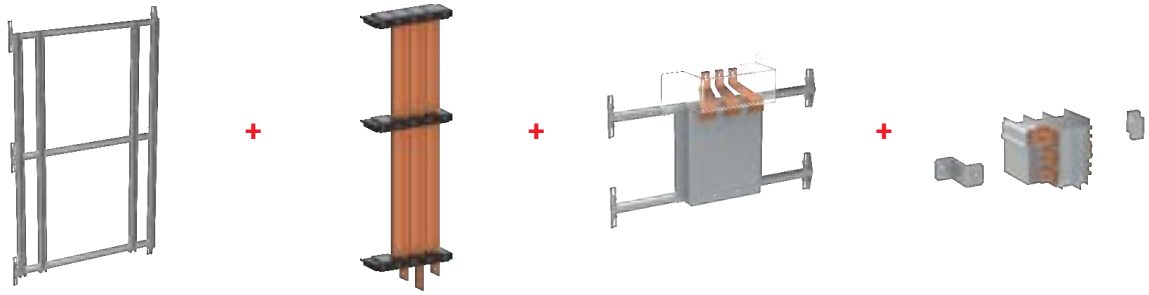

Pan assembly kit + Main copper kit + Incoming kit + Twin plug In

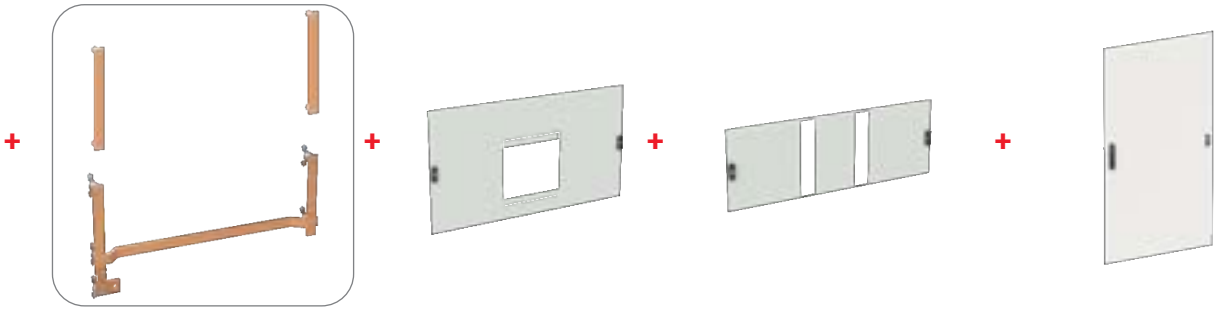

Neutral & Earth copper kit + Incoming Cover + Outgoing Cover + Door

Subdistribution boards

System pro E® energy PB

System overview

Cabinets: Back panel + Side panels
- Back panel, sendzimir zinc plated steel 1.5 mm
- Side panels, epoxy-polyester coated sheet steel 1.2 mm
- 4 internal corner parts
- Profiles to fix the pan assembly, functional units (mounting plates, DIN rail, busbar isolators...)
- Frame to fix the cover plates
- Required hardware

Extensions: Back panel + coupling profiles
- Back panel, sendzimir zinc plated steel 1.5 mm
- 4 internal corner parts
- Profiles to fix the functional units (mounting plate, DIN rail, busbar isolators...)
- Frame to fix the cover plates
- Coupling profiles and accessories
- Required hardware

Top & Bottom
- With a wide opening to maximize the entry surface
- The kit includes 1 unit of the selected top and
- It's required to order 2 top & bottom per cabinet

Plinth
- 100 mm height
- Easy to fix
- Hardware to fix to the cabinet included

Interior fitting:
- Quick mounting system to fix the pan assembly, incomer kits, DIN-rails, mounting plates, covers, etc. See chapter for System pro E® energy Combi

Plain doors
- 3 points locking system already mounted
- PUR gasket to guarantee perfect closing and the protection degree
- 130° opening angle
- Swing handle for 1 400 mm and higher doors
- Wide range of accessories

Subdistribution boards

System pro E® energy PB

System overview

SpEe PB is a highly versatile power distribution solution, designed for seamless installation across a wide range of applications. Supporting configurations from 6 to 28 outgoing ways and incomers ranging from 250A to 1250A, it offers exceptional adaptability for both standard and complex systems.
SpEe PB system gives you the flexibility to design your own custom panelboard, tailored to specific project requirements. Engineered for safety, reliability, and high performance, it delivers peace of mind in any environment whether commercial, industrial, or infrastructure based.

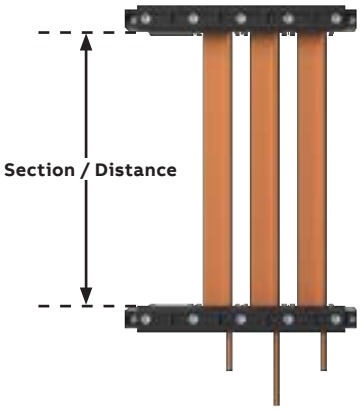

The system is designed based on the XT1 MCCB as a unit size

Pan assembly and Main copper selection guide

Section	Distance mm	S800 3P	XT1	XT3	XT5
6w	250	6 S800 (3 Right, 3 Left)	6 XT1 (3 Right, 3 Left)	4 XT3 (2 Right, 2 Left)	2 XT5 (1 Right, 1 Left)
8w	350	8 S800 (4 Right, 4 Left)	8 XT1 (4 Right, 4 Left)	6 XT3 (3 Right, 3 Left)	4 XT5 (2 Right, 2 Left)
10w	450	10 S800 (5 Right, 5 Left)	10 XT1 (5 Right, 5 Left)	8 XT3 (4 Right, 4 Left)	6 XT5 (3 Right, 3 Left)

Unused busbar will be covered by busbar cover

Unused twin plug-in will be closed by plug-in cover

Empty areas in the covers will be closed by blanking cover

Subdistribution boards

System pro E® energy PB

Technical specifications and product features

Technical specifications		
Standards / requirements	IEC 61439 -1/-2	
Protection Class	Class I, earthed	
Pollution degree	2	
Segregation	Form 1 and Form 2	
Degree of protection	IP43	
Without door	IP30	
Mechanical impact Strength	IK 07- knock outs	
	IK 08 - without door, transparent door	
	IK 09 - plain door & side panels	
Conditions of installation	Indoor installation	
	Ambient air temperature max. +40 °C	
	Ambient air temperature min. -5 °C	
	Storage temperature max. +55 °C	
	Storage temperature min. -40 °C	
Rated operational voltage	(U_e) 415 V	
Rated insulation voltage	(U_i) 800V AC (XT1, XT3)	
	(U_i) 1000V AC (MBB, XT2, XT4, XT5, XT6, XT7)	
Rated short-circuit current	(I_{cw}) 25 kA/1s 400A	
	(I_{cw}) 36 kA/1s 800A	
	(I_{cw}) 42 kA/1s 1250A	
Rated current	(I_n) 400A	
	(I_n) 800A	
	(I_n) 1250A	
Rated current of busbar systems in IP43	(I_{nA}) 400A @RDF 1.00	
	(I_{nA}) 800A @RDF 1.00	
	(I_{nA}) 1250 @RDF 0.92	
Product features		
	Housing and door	Color RAL 7035
	Rear panel & mounting profiles	Sendzimir zinc plated steel 1.5 mm
	Side, top and bottom panel	Epoxy-polyester coated sheet steel 1.2 mm
	Plain door	Epoxy-polyester coated sheet steel 1.5 mm
	Cover plates	Epoxy-polyester coated sheet steel 1 mm
	Door opening angle: 130°	
	Doors with espagnolette closure, 3 points	
	locking system	
	Doors for wall-mounted cabinets: with latch	
	plate and 3 mm double bit pin	
	Doors for floor-standing cabinets: with swing	
	handle and 3 mm double bit pin	
Assembly options	Prepared to be fitted with System Pro E® energy PB	
	Pan assembly, incomer kits, N& PE kits	
Forms of delivery	Flat kits	

Subdistribution boards

System pro E® energy PB

Order codes



Q903P

Pan Assembly kit

- Cross pieces
- Vertical channels for MCCB outgoing fixing

Additional information		Order details			
Article	**Number of ways (XT1 module)**	**Type code**	**Order code**	**Price**	**Pcs.**
Pan assembly 6 ways	6	Q903P111	1SZE900311B0010		1
Pan assembly 12 ways (6+6)	12	Q903P141	1SZE900314B0010		1
Pan assembly 14 ways (6+8)	14	Q903P151	1SZE900315B0010		1
Pan assembly 20 ways (6+6+8)	20	Q903P171	1SZE900317B0010		1
Pan assembly 20 ways (10+10)	20	Q903P172	1SZE900317B0020		1
Pan assembly 28 ways (10+10+8)	28	Q903P191	1SZE900319B0010		1

Q911P

Main Copper kit

- Copper parts for L1/L2/3
- Busbar supports
- Busbar supports cap

Additional information			Order details			
Section	**In in A**	**Number of ways (XT1 module)**	**Type code**	**Order code**	**Price**	**Pcs.**
6	400	6	Q911P211	1SZE901121B0010		1
6+6	400	12	Q911P241	1SZE901124B0010		1
6+8	400	14	Q911P251	1SZE901125B0010		1
10+10	400	20	Q911P271	1SZE901127B0010		1
6+6+8	400	20	Q911P281	1SZE901128B0010		1
10+10+8	400	28	Q911P291	1SZE901129B0010		1
6+6	800	12	Q911P441	1SZE901144B0010		1
10+10	800	20	Q911P471	1SZE901147B0010		1
6+6+8	800	20	Q911P472	1SZE901147B0020		1
10+10+8	800	28	Q911P491	1SZE901149B0010		1
10+10	1250	20	Q911P571	1SZE901157B0010		1
10+10+8	1250	28	Q911P591	1SZE901159B0010		1

Subdistribution boards

System pro E® energy PB

Order codes



Q902P

Incoming kit

- Cross pieces
- Incomer MCCB mounting plate
- Copper terminals
- Lexan cover

Additional information		Order details			
Article	**In in A**	**Type code**	**Order code**	**Price**	**Pcs.**
Incoming kit XT3 250A	250	Q902P101	1SZE900210B0010		1
Incoming kit XT5 400A	400	Q902P201	1SZE900220B0010		1
Incoming kit XT5 630A	630	Q902P301	1SZE900230B0010		1
Incoming kit XT6 800A	800	Q902P401	1SZE900240B0010		1
Incoming kit XT7 1250A	1250	Q902P501	1SZE900250B0010		1
Incoming kit direct connection 800A	800	Q911P401	1SZE901140B0010		1
Incoming kit direct connection 1250A	1250	Q911P501	1SZE901150B0010		1

Neutral & Earth Copper kit

- Copper parts N right/left
- Copper Bridge N
- Isolators for N fixing
- Bracket for PE fixing

Additional information		Order details			
Article		**Type code**	**Order code**	**Price**	**Pcs.**
	busbar Neutral kit 800A-1250A 10mm	Q923P001	1SZE902300B0010		1
	busbar Neutral Extension 800A-1250A 10mm	Q923P002	1SZE902300B0020		1
	busbar Earth kit 800A-1250A 10mm	Q924P001	1SZE902400B0010		1

Subdistribution boards

System pro E® energy PB

Order codes

Twin Plug In devices

- Twin Plug In
- Metal bracket for MCCB fixing

Q901P

Additional information		Order details			
Article	**Number of ways (XT1 module)**	**Type code**	**Order code**	**Price**	**Pcs.**
Plug in S800		Q901P111	1SZE900111B0010		1
plug in XT1		Q901P211	1SZE900121B0010		1
plug in XT3		Q901P411	1SZE900141B0010		1
plug in XT5		Q901P611	1SZE900161B0010		1
plug in XT1 busbar cover		Q901P212	1SZE900121B0020		10
plug in XT3 busbar cover		Q901P412	1SZE900141B0020		10
plug in XT5 busbar cover		Q901P612	1SZE900161B0020		10

Doors

- 3 points locking system
- 30° opening angle
- PUR gasket
- Swing handle for 1 400 mm and higher doors

Q923P

Additional information			Order details			
Article	**Width**	**Height**	**Type code**	**Order code**	**Price**	**Pcs.**
Door plain W800 H1000 MA	800	800	Q923P001	1SZE902300B0010		1
Door plain W800 H1400 MA	800	800	Q923P002	1SZE902300B0020		1
Door plain W800 H1800 MA	800	800	Q924P001	1SZE902400B0010		1

Subdistribution boards

System pro E® energy PB

Order codes



Incoming Covers

- Cover
- 1/4 turn quick-lock

QCB840PXT

Additional information			Order details			
Article	**Width**	**Height**	**Type code**	**Order code**	**Price**	**Pcs.**
Cover for PB XT3 Incomer H400	800	400	QCB840PXT3	1SZE980090B9010		1
Cover for PB XT5 Incomer H400	800	400	QCB840PXT5	1SZE980090B9020		1
Cover for PB XT6 Incomer H400	800	400	QCB840PXT6	1SZE980090B9030		1
Cover for PB XT7 Incomer H600	800	600	QCB860PXT7	1SZE980090B9040		1



Outgoing Covers

- Cover
- 1/4 turn quick-lock

QCB825PS

Additional information			Order details			
Article	**Width**	**Height**	**Type code**	**Order code**	**Price**	**Pcs.**
Cover for PB S800 H250	800	250	QCB825PS80	1SZE980090B9050		1
Cover for PB S800 H350	800	350	QCB835PS80	1SZE980090B9060		1
Cover for PB S800 H450	800	450	QCB845PS80	1SZE980090B9070		1
Cover for PB XT1-XT3 H250	800	250	QCB825PXT13	1SZE980090B9810		1
Cover for PB XT1-XT3 H350	800	350	QCB835PXT13	1SZE980090B9820		1
Cover for PB XT1-XT3 H450	800	450	QCB845PXT13	1SZE980090B9830		1
Cover for PB XT5 H250	800	250	QCB825PXT5	1SZE980090B9140		1
Cover for PB XT5 H350	800	350	QCB835PXT5	1SZE980090B9150		1
Cover for PB XT5 H450	800	450	QCB845PXT5	1SZE980090B9160		1

Subdistribution boards

System pro E® energy PB

Accessories

		Order details			
		Type code	Order code	Price	Pcs.
	busbar support	Q920P001	1SZE902000B0010		1
	busbar support cap	Q921P001	1SZE902100B0010		10
	busbar support phase barrier	Q922P001	1SZE902200B0010		1
	phase barrier separators	Q922P002	1SZE902200B0020		1
	cross bar	Q940P001	1SZE904000B0010		1
	busbar cover	Q922P003	1SZE902200B0030		1
	blanking cover XT1	Q940P002	1SZE904000B0020		1
	blanking cover XT5	Q940P003	1SZE904000B0030		1

Subdistribution boards

System pro E® energy PB
Configuration Guide

01

Select Pan assembly kit based on number of outgoings

Defines the mechanical layout and number of outgoing MCCBs.
Based on: Total number of outgoing ways

- 6ways 6
- 12ways 6+6
- 14ways 6+8
- 20ways 10+10
- 20ways 6+6+8
- 28ways 10+10+8

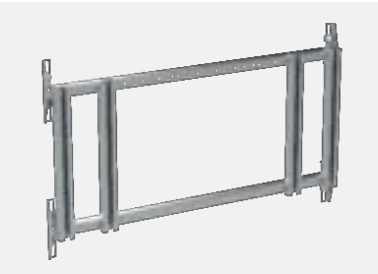

02

Select Main copper kit based on rating

Defines the main busbar system based on current requirements.
Based on: Total system current (400A, 800A, 1250A).

- Select the matching copper for the required ampacity
- Corresponds directly to the pan assembly size

03

Select incoming kit based on the incoming kit rating/frame size

Defines how the incoming power enters the system.
Based on: Frame size and rating of the incoming MCCB (XT3 to XT7, 250A–1250A).
Options:

- XT3: 250A
- XT5: 400A / 630A
- XT6: 800A
- XT7: 1250A

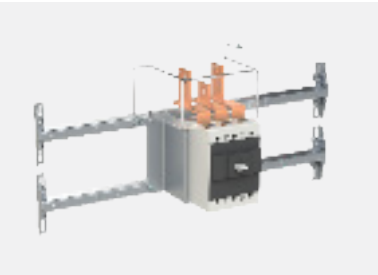

Subdistribution boards
System pro E® energy PB
Configuration Guide

04

Select Neutral & Earth Copper kit

Provides grounding and neutral connectivity.
Based on: Busbar system (e.g., 800A–1250A, 10mm copper)

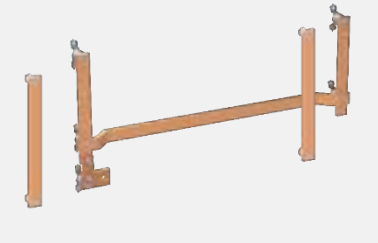

05

Select Incomer and outgoing covers

Ensure protection and covers for incoming and outgoing sections.
Based on: Device frame sizes and height.

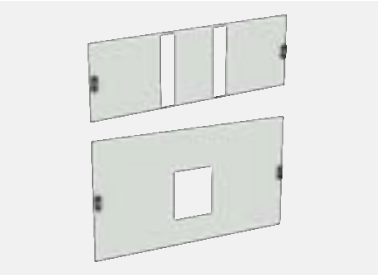

06

Select covers for the remaining part

Ensure protection and covers for empty slots in the enclosure going sections.
Based on: remainder space not covered by the incoming and outgoing covers.

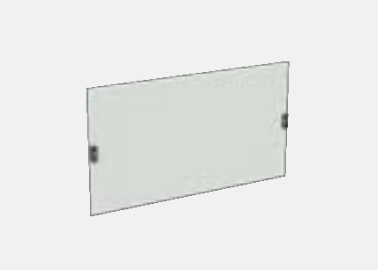

CONSUMER UNITS

Electrical installation solutions for buildings
Consumer units

Index

AK600 / UK600	**2**
AK600 / UK600- Portfolio overview	6
AK600	8
UK600	9
Accessories & spare parts	12
AK600 Media	34
UK600 Media	38
0UK600 Combi	40
Accessories & spare parts Media	42
MISTRAL41F	**46**
Flush-mounted – Brick wall	54
Flush-mounted – Hollow wall	56
Flush-mounted with terminals – Brick wall	57
Accessories	59
MISTRAL41W	**62**
Wall-mounted (650)	68
Wall-mounted (750)	70
Wall-mounted with terminals (650)	72
Accessories	74
Terminal bocks	76
Terminal bars	78
MISTRAL Multimedia	**80**
Easy installation for media equipment	80
Mistral41F and Mistral41W Multimedia	81
Other accessories	82
MISTRAL65 / 65H	**84**
MISTRAL65 Wall-mounted	98
MISTRAL65H Wall-mounted	100
MISTRAL65 / 65H Accessories	101
Terminal blocks	103
Terminal bars	105
Mini EUROPA40	**108**
Fix-o-Rail 150	**112**
Fix-o-Rail Junior	**121**

The success story is being continued
UK600 consumer unit now also available as wall-mounted version AK600

The UK600 flush-mounted consumer unit has written an unparalleled success story in flush-mounted installation since its introduction. With its unique flexibility and ease of installation, it has set standards in electrical installation. Not surprisingly, numerous customers have also requested a variant of the UK600 for wall-mounting. The AK600 wall-mounted consumer unit now meets this demand in a sophisticated way.

Wall-mounted consumer unit

AK600

- Up to 130 % extended wiring space
- Available with up to 5 rows
- Wall-mounted consumer unit with modern design
- Same accessories like UK600
- WiFi doors with plastic inserts

Welcome to the family!

The new AK600 and the established UK600 are the perfect duo for modern wall and flush mounting, combining all valued features.
Not only do they offer a high level of flexibility, but both versions can be mounted with the same accessories, which significantly simplifies stock-keeping.

While the UK600 was already one of a kind in terms of installation speed, both are now setting new standards in this area as well: With FlexLine®, the new range of DIN rail devices, and the revised N/PE Quick plug-in terminal blocks, wiring is now even faster for the UK600 and AK600.

Installation has never been quicker and easier with the new range of DIN-rail devices, FlexLine®, redefining ease of installation thanks to push-in technology, flex terminals and slim design.

Flush-mounted consumer unit

UK600

- Up to 200% extended wiring space
- Surface-mounting frame for partially recessed assembly
- Project phase packaging
- Same accessories like AK600
- WiFi doors with plastic inserts

Highlights
Simple and well-established

There are many common features to the AK600 and the UK600. One of them stands out one in particular: the wiring space which is one of the largest on the the market. This considerably facilitates the installation of equipment and makes work more efficient. It is the sum of all features that make these two enclosures the perfect solution for all types of installation requirements for flush and wall mounting.

—
01

—
02

—
03

—
04

—
05

—
06

—
01
Extensive wiring space

—
02
Available in up to 5 rows

—
03
Unified interior and common accessories

—
04
6- or 12-fold patch panels with knock-outs for keystone and EDAT modules

—
05
Integrated lugs, to fasten wires using cable ties

—
06
Identical doors for flush- and wall-moutned enclosures

AK600

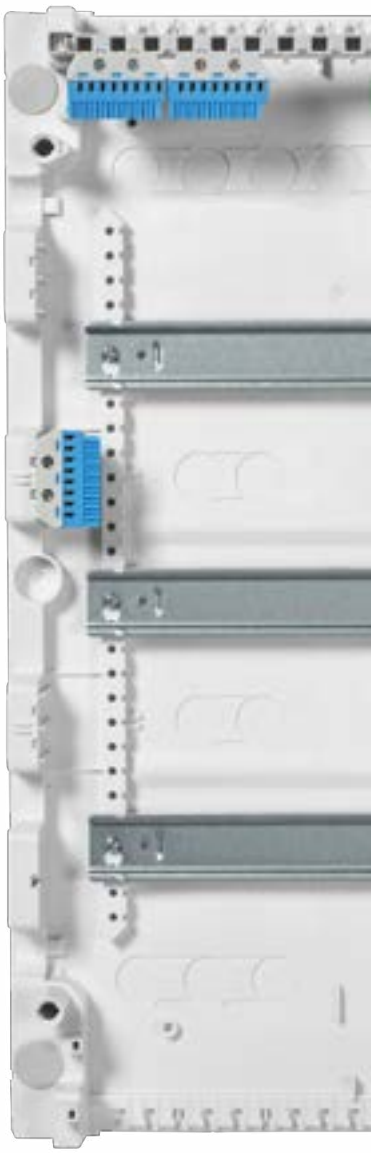

UK600

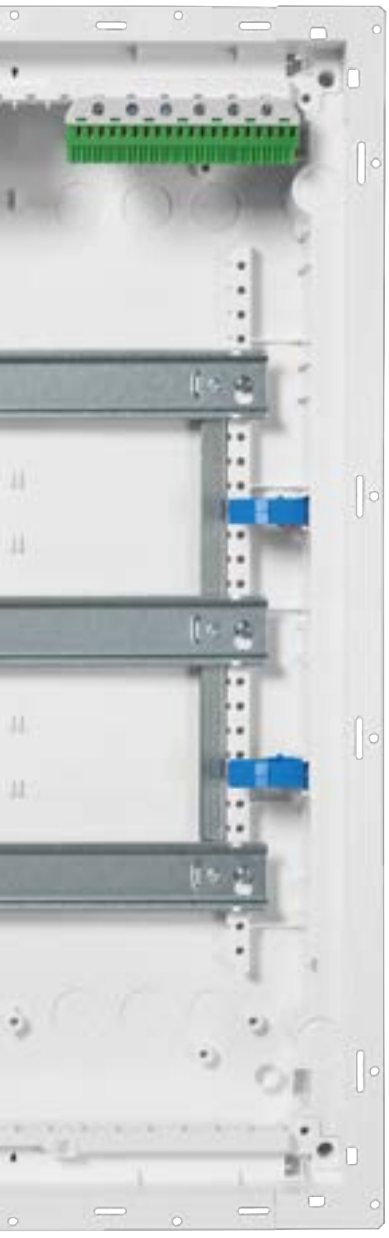

—
07

—
08

—
09

—
10

—
11

—
12

—
07
Rubber device holder,
tool-free assembly

—
08
3-gang snap-in socket,
120° rotatable

—
09
Horizontal or vertical
coupling of multiple enclosures

—
10
Wire holder for innovative cable management,
can also be mounted on perforated mounting plate

—
11
Robust DIN rails can be detached
individually or as a DIN rail frame

—
12
High flexibility thanks to laterally
assembled N/PE terminals

Consumer units
Smart in every detail

Wall-mounted-Consumer unit

AK600

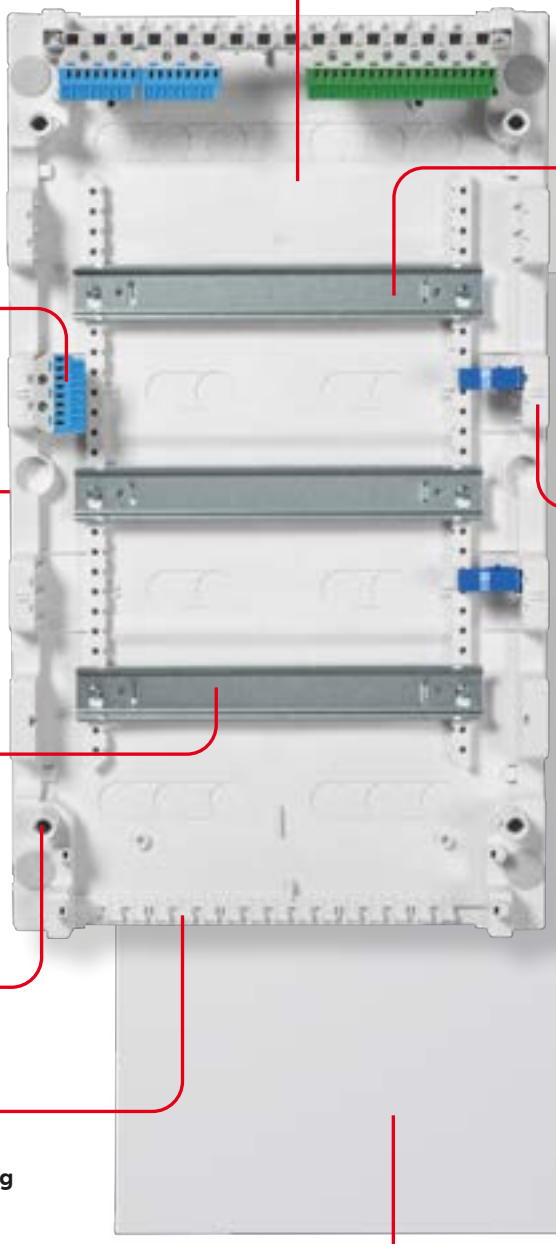

Up to 130 % extended wiring space

Robust DIN-rails, removable individually

Terminals can be mounted to the side, space-saving and flexible

Wire holder for cable management

Perforations for horizontal or vertical coupling

Available in up to 5 rows

TIP-in-lock, possibility to insert a lock with key

Sealable quick screws

Tool-free reversible opening left /right

Integrated lugs, to fasten wires using cable ties

Door also available as ventilated or WiFi version

Consumer units
Smart in every detail

Flush-mounted-consumer unit

UK600

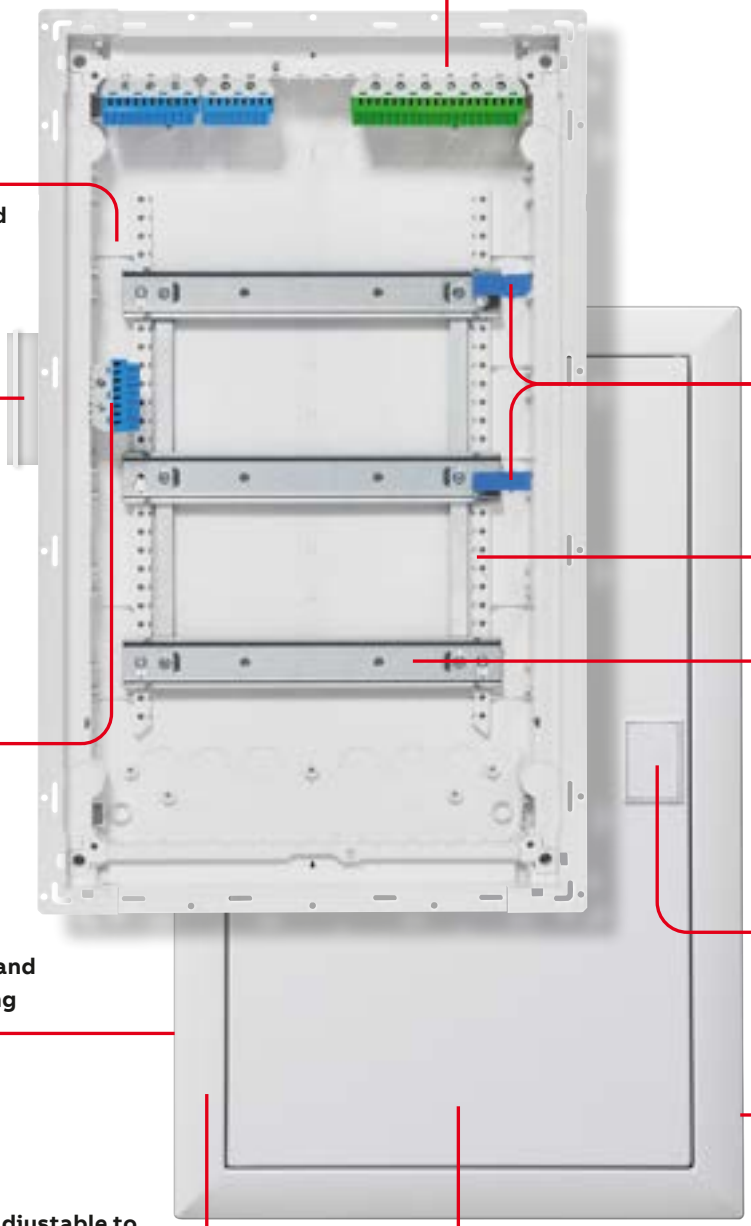

Cable inlet with integrated terminal fixture, at the top and bottom

Wire holder for cable entry

Up to 200 % extended wiring space

Coupling set for horizontal and vertical coupling

Removable DIN rail frame

Terminals can be mounted to the side, space-saving and flexible

Available in up to 5 rows

TIP-in-lock, possibility to insert a lock with key

Enclosure for flush- and hollow-wall-mounting

Tool-free reversible opening left /right

Flat trim frame, adjustable to uneven surfaces

Door and frame available in different design variants

Media enclosure

Communication technology at a glance

Wall-mounted-media enclosure

AK600

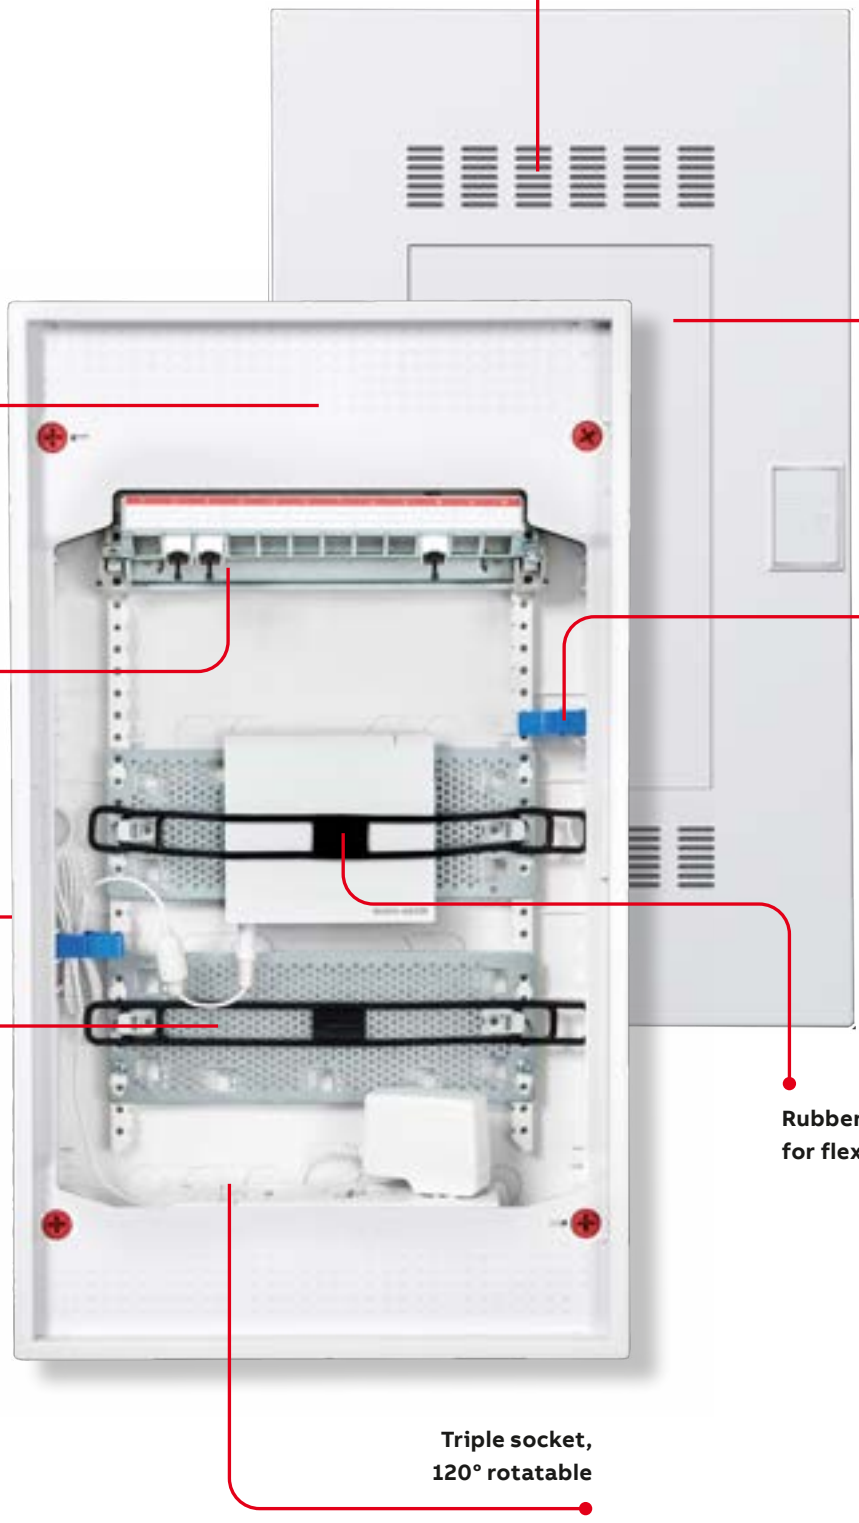

Media enclosure

Communication technology at a glance

Flush-mounted-media enclosure

UK600

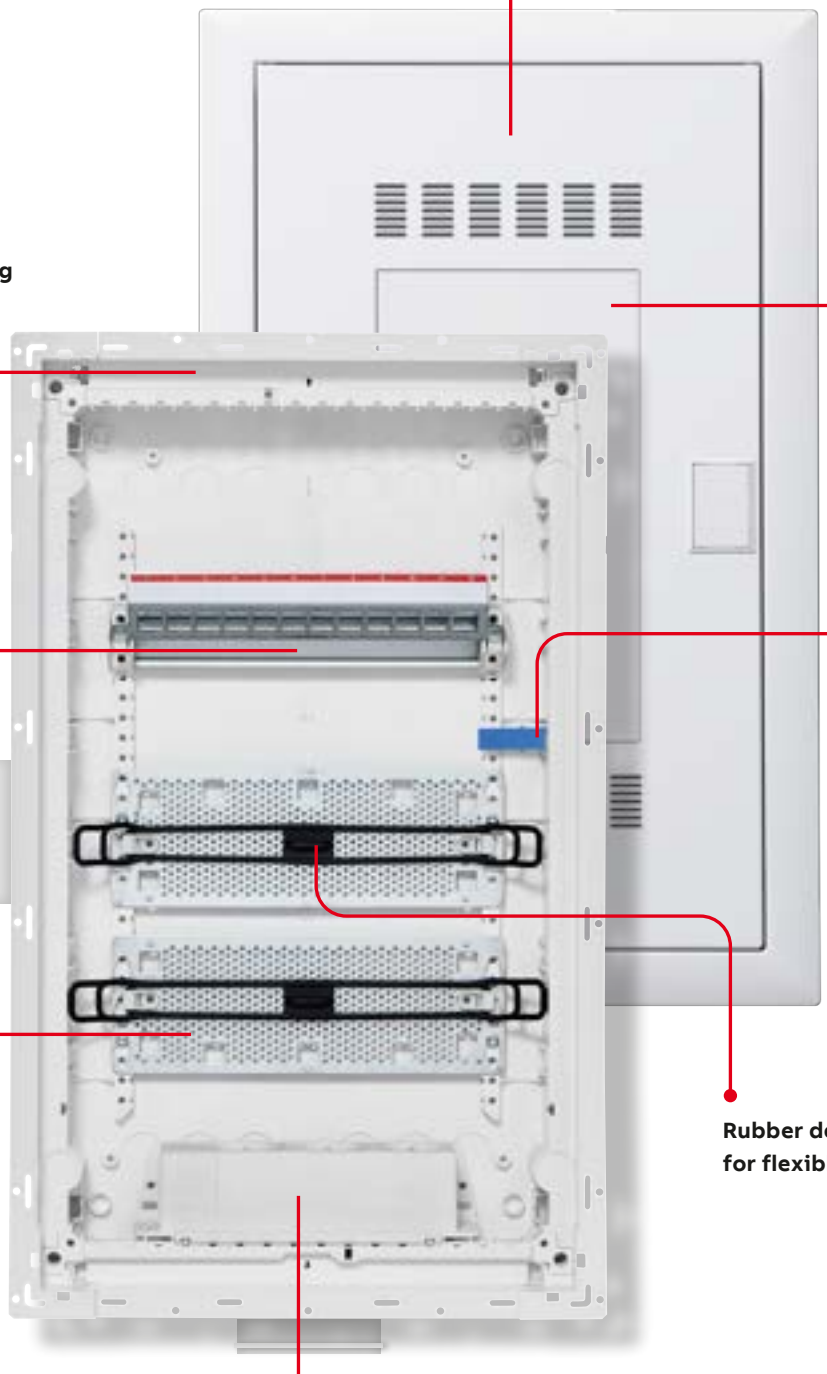

Combi enclosure

Communication technology at a glance

Flush-mounted-combi enclosure

UK600

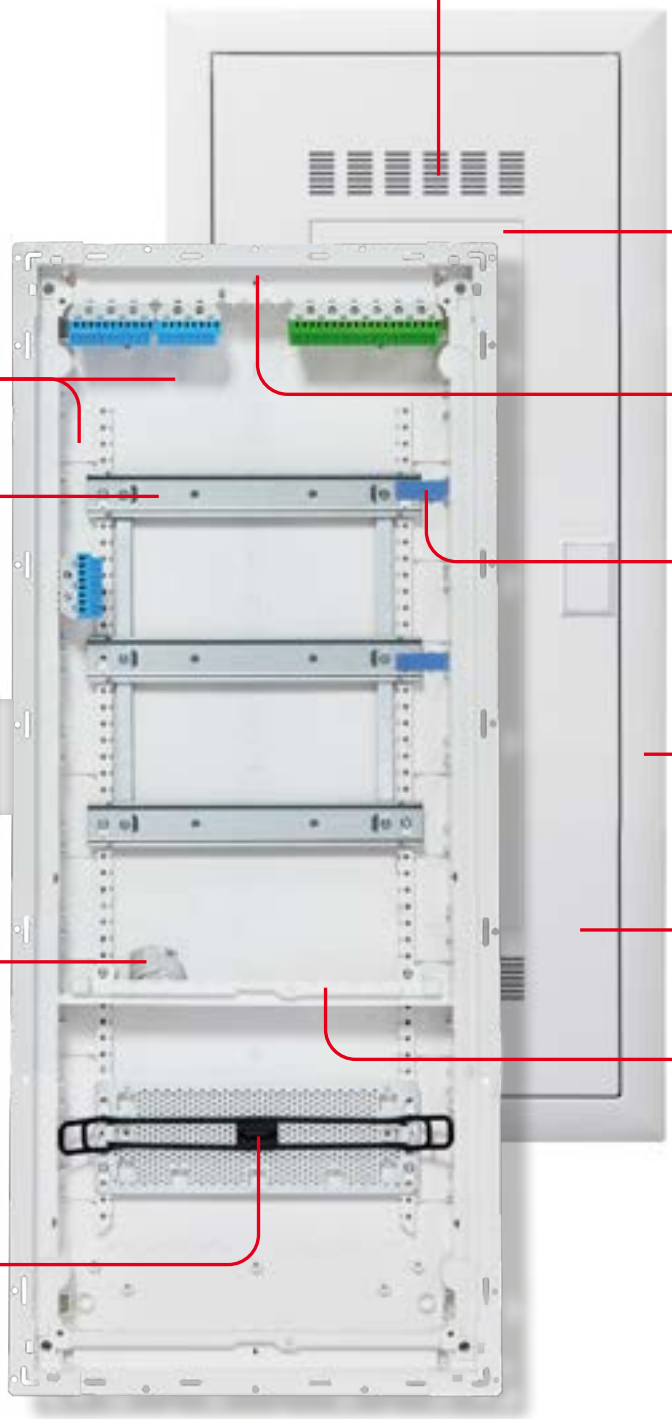

Doors with ventilation holes

WiFi doors with plastic insert

Up to 200 % extended connection space

Cable inlet with integrated terminal fixture, at the top and bottom

Coupling of 3-row consumer unit and additional multimedia module available

Wire holder for internal cable management

Connection set for horizontal and vertical connection

Flat trim frame, adjustable to uneven surfaces

Tool-free reversible opening left /right

Snap in socket, 90° rotatable

Partition for the separation of distribution and media section

Removable modular perforated sheet steel mounting plates

Notes

Consumer units AK600

With N/PE quick terminals

Wall-mounted consumer units – AK600, IP30/IP40 with door
I_n up to 63 A
Consumer units DIN EN 60670-24, DIN 43871
For building installation according to DIN 18015
Mechanical impact strength: IK07
Available in 1 up to 5 row versions as wall-mounted consumer units
Wall box:
- non-warp, break-proof, non-flammable, low-halogen plastic
- with cable strain relief comb
- with detachable DIN rails
- combinable
Reversible door opening (tool-free)
Perforations for horizontal and vertical connection
With N/PE quick terminals
Wire holder for professional cable organization
Cover with quick-release screws, lead-sealable
45 mm slots for 12 devices, expandable to 14
Labelling system
Trim frame and sheet steel door, adjustable for uneven surface
Colour: White, RAL 9016

01 Base

02 N/PE quick terminals

03 Removable DIN-rails

04 Cover with 90° quick-release screws, lead-sealable

05 Sheet steel door (Accessories)

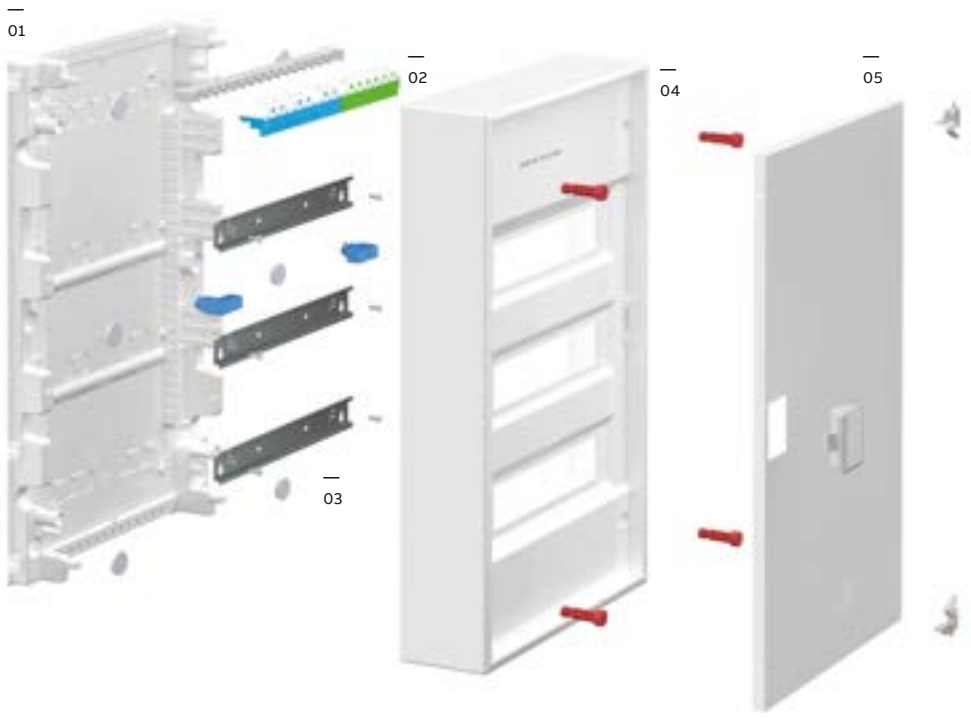

Consumer units AK600

With N/PE quick terminals

Article		H x W x D (mm)	SU	Type	Order code
AK612N2	**Wall-mounted consumer unit, 1 row**				
	External dimensions With N/PE quick terminals: ZK51B, ZK82B, ZK113G Without door	328 x 339 x 98	12 (13)	AK612N2	2CPX032563R9999
AK624N3	**Wall-mounted consumer unit, 2 rows**				
	External dimensions With N/PE quick terminals: ZK51B, 2 x ZK82B, ZK144G Without door	453 x 339 x 98	24 (28)	AK624N3	2CPX032564R9999
AK636N3	**Wall-mounted consumer unit, 3 rows**				
	External dimensions With N/PE quick terminals: 3 x ZK82B, ZK206G Without door	578 x 339 x 98	36 (41)	AK636N3	2CPX032565R9999
AK648N4	**Wall-mounted consumer unit, 4 rows**				
	External dimensions With N/PE quick terminals: 4 x ZK82B, ZK237G Without door	703 x 339 x 98	48 (56)	AK648N4	2CPX032566R9999
AK660N4	**Wall-mounted consumer unit, 5 rows**				
	External dimensions With N/PE quick terminals: ZK113B, 3 x ZK82B, ZK268G Without door	828 x 339 x 98	60 (69)	AK660N4	2CPX032567R9999

> For N/PE quick terminals refer to page 38
> Technical specifications of AK600 from page 54

Consumer units AK600

With N/PE screw terminals

Wall-mounted consumer units – AK600, IP30/IP40 with door ⊡
I_n up to 63 A
Consumer units DIN EN 60670-24, DIN 43871
For building installation according to DIN 18015
Mechanical impact strength: IK07
Available in 1 up to 5 row versions as wall-mounted consumer units
Wall box:
- non-warp, break-proof, non-flammable, low-halogen plastic
- with cable strain relief comb
- with detachable DIN rails
- combinable
Reversible door opening (tool-free)
Perforations for horizontal and vertical connection
With N/PE screw terminals
Wire holder for professional cable organization
Cover with 90° quick-release screws, lead-sealable
45 mm slots for 12 devices, expandable to 14
Labelling system
Trim frame and sheet steel door, adjustable for uneven surface
Colour: White, RAL 9016

01 Base

02 N/PE quick terminals

03 Removable DIN-rails

04 Cover with 90° quick-release screws, lead-sealable

05 Sheet steel door (Accessories)

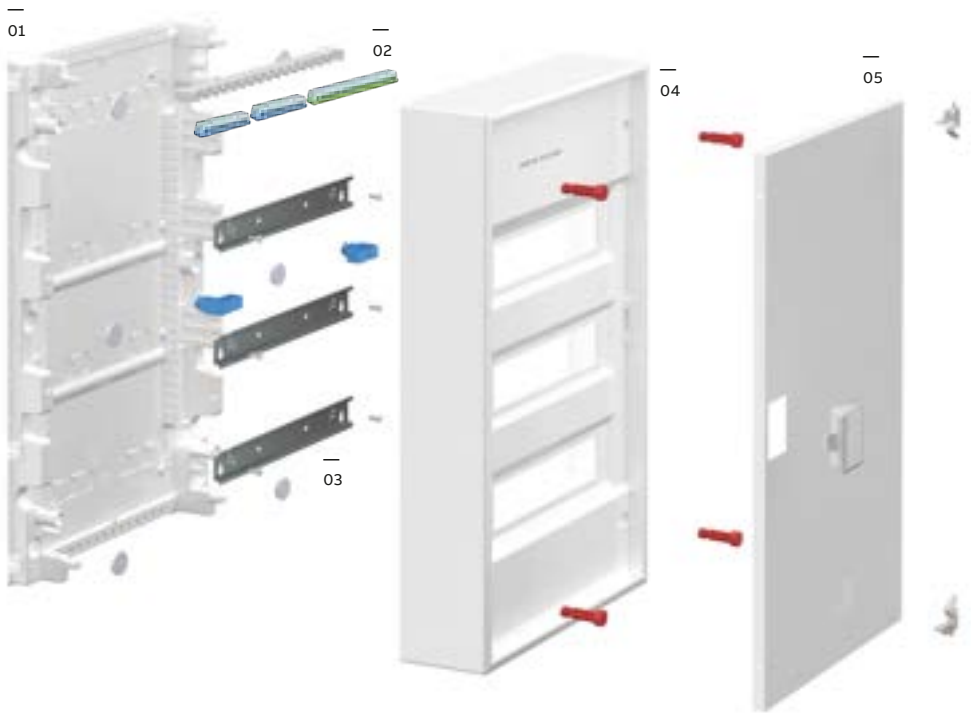

Consumer units AK600

with N/PE screw terminals

Article		H x W x D (mm)	SU	Type	Order code
AK612E2	**Wall-mounted consumer unit, 1 row**				
	External dimensions With N/PE screw terminals ZK507, ZKS11B, ZKS11G Without door	328 x 339 x 98	12 (13)	AK612E2	2CPX032568R9999
	With metal door			AK612D2	2CPX030020R9999
AK624E2	**Wall-mounted consumer unit, 2 rows**				
	External dimensions With N/PE screw terminals ZK507, ZKS16B, ZKS21G Without door	453 x 339 x 98	24 (28)	AK624E2	2CPX032569R9999
	With metal door			AK612D2	2CPX030021R9999
 AK636E3	**Wall-mounted consumer unit, 3 rows**				
	External dimensions With N/PE screw terminals: ZK507, 2 x ZKS11B, ZKS26G Without door	578 x 339 x 98	36 (41)	AK636E3	2CPX032570R9999
	With metal door			AK636D3	2CPX030022R9999
 AK648E3	**Wall-mounted consumer unit, 4 rows**				
	External dimensions With N/PE screw terminals ZK507, ZKS11B, ZKS16B, ZKS26G Without door	703 x 339 x 98	48 (56)	AK648E3	2CPX032571R9999
	With metal door			AK648D3	2CPX030023R9999
AK660E3	**Wall-mounted consumer unit, 5 rows**				
	External dimensions With N/PE screw terminals ZK507, 2 x ZKS16B, ZKS11G, ZKS26G Without door	828 x 339 x 98	60 (69)	AK660E3	2CPX032572R9999
	With metal door			AK660D3	2CPX030024R9999

> For N/PE screw terminals, please refer to page 40
> Technical specifications of AK600 from page 54

Consumer units UK600 with trim frame and door

With N/PE quick-terminals

Flush-mounted consumer units – UK600, IP30
I_n uo to 63 A
Consumer units DIN EN 60670-24, DIN 43871
For building installation according to DIN 18015
Mechanical impact strength: IK07
Available in 1 up to 5 row versions as flush-mounted consumer units
Can be upgraded for surface-mounting or partially recessed mounting
Upgradeable for hollow-wall-mounting using UZ91P4
Wall box:
- non-warp, break-proof, non-flammable, low-halogen plastic
- with cable strain relief comb
- with detachable cable inlets
- combinable
Wall grips
Reversible opening (tool-free)
Coupling set for horizontal and vertical connection
Device support with removable DIN rail
With N/PE quick-terminals
Wire holder for professional cable organization
Cover with 90° quick-action screws, lead-sealable
45 mm slots for 12 devices, expandable to 14
Labelling system
Trim frame and sheet steel door, adjustable for uneven surface
Colour: White, RAL 9016

*in connection with hollow-wall-mounting set UZ91P4

01 N/PE quick-terminals
02 Wall box
03 Device carrier
04 Cover
05 Trim frame with sheet steel door

Consumer units UK600 with trim frame and door

With N/PE quick-terminals

Article		H xW x D (mm)	SU	Type	Ord.No.
 UK612N2	**Flush-mounted consumer units, 1-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE quick-terminals:** ZK51B, ZK82B, ZK113G	355 x 367 x 95 328 x 340 x 88	12 (13)	UK612N2	2CPX031369R9999
 UK624N3	**Flush-mounted consumer units, 2-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE quick-terminals:** ZK51B, 2 x ZK82B, ZK144G	480 x 367 x 95 453 x 340 x 88	24 (28)	UK624N3	2CPX031370R9999
UK636N3	**Flush-mounted consumer units, 3-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE quick-terminals:** ZK51B, 2 x ZK113B, ZK206G	605 x 367 x 95 578 x 340 x 88	36 (41)	UK636N3	2CPX031371R9999
UK648N3	**Flush-mounted consumer units, 4-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE quick-terminals:** 2 x ZK82B, ZK144B, ZK237G	730 x 367 x 95 703 x 340 x 88	48 (56)	UK648N3	2CPX031372R9999
UK660N4	**Flush-mounted consumer units, 5-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE quick-terminals:** ZK51B, 2 x ZK82B, ZK144B, ZK268G	855 x 367 x 95 828 x 340 x 88	60 (70)	UK660N4	2CPX031373R9999

> N/PE quick-terminals, see page 38
> Technical specifications and dimensions see page 56

Consumer units UK600 with trim frame and door

With N/PE screw terminals

Flush-mounted consumer units – UK600, IP30,
I_n up to 63 A
Consumer units DIN EN 60670-24, DIN 43871
For building installation according to DIN 18015
Mechanical impact strength: IK07
Available in 1 up to 5 row versions as flush-mounted consumer units
Can be upgraded for surface-mounting or partially recessed mounting
Upgradeable for hollow-wall-mounting using UZ91P4
Wall box:
- non-warp, break-proof, non-flammable, low-halogen plastic
- with cable strain relief comb
- with detachable cable inlets
- combinable
Wall grips
Reversible opening (tool-free)
Coupling set for horizontal and vertical connection
Device support with removable DIN rail
With N/PE screw terminals
Wire holder for professional cable organization
Cover with 90° quick-action screws, lead-sealable
45 mm slots for 12 devices, expandable to 14
Labelling system
Trim frame and sheet steel door, adjustable for uneven surface
Colour: White, RAL 9016

*in connection with hollow-wall-mounting set UZ91P4

01 N/PE Screw terminals
02 Wall box
03 Device carrier
04 Cover
05 Trim frame with sheet steel door

Consumer units UK600 with trim frame and door

With N/PE screw terminals

Article		H x W x D (mm)	SU	Type	Ord.No.
 UK612E3	**Flush-mounted consumer units, 1-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE screw terminals:** ZK507, ZKS6B, ZKS16G	355 x 367 x 95 328 x 340 x 88	12 (13)	UK612E2	2CPX077840R9999
 UK624E3	**Flush-mounted consumer units, 2-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting With N/PE screw terminals: ZK507, ZKS16B, ZKS21G	480 x 367 x 95 453 x 340 x 88	24 (28)	UK624E3	2CPX077841R9999
 UK636E3	**Flush-mounted consumer units, 3-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE screw terminals:** ZK507, 2 x ZKS11B, ZKS26G	605 x 367 x 95 578 x 340 x 88	36 (41)	UK636E3	2CPX077842R9999
 UK648E3	**Flush-mounted consumer units, 4-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE screw terminals:** ZK507, ZKS11B, ZKS16B, ZKS26G	730 x 367 x 95 703 x 340 x 88	48 (56)	UK648E3	2CPX077843R9999
 UK660E3	**Flush-mounted consumer units, 5-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE screw terminals:** ZK507, 2 x ZKS16B, ZKS11G, ZKS21G	855 x 367 x 95 828 x 340 x 88	60 (70)	UK660E3	2CPX077844R9999

> N/PE screw terminals, see page 40
> Technical specifications and dimensions see page 56

Consumer units UK600 with trim frame and door

Without terminals

Flush-mounted consumer units – UK600, IP30,
I_n uo to 63 A
Consumer units DIN EN 60670-24, DIN 43871
For building installation according to DIN 18015
Mechanical impact strength: IK07
Available in 1 up to 5 row versions as flush-mounted consumer units
Can be upgraded for surface-mounting or partially recessed mounting
Upgradeable for hollow-wall-mounting using UZ91P4
Wall box:
- non-warp, break-proof, non-flammable, low-halogen plastic
- with cable strain relief comb
- with detachable cable inlets
- combinable
Wall grips
Reversible opening (tool-free)
Coupling set for horizontal and vertical connection
Device support with removable DIN rail
Without terminals
Wire holder for professional cable organization
Cover with 90° quick-action screws, lead-sealable
45 mm slots for 12 devices, expandable to 14
Labelling system
Trim frame and sheet steel door, adjustable for uneven surface
Colour: White, RAL 9016

*in connection with hollow-wall-mounting set UZ91P4

01 Wall box
02 Device carrier
03 Cover
04 Trim frame with sheet steel door

Consumer units UK600 with trim frame and door

Without terminals

Article		H x W x D (mm)	SU	Type	Ord.No.
UK612K	**Flush-mounted consumer units, 1-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting	355 x 367 x 95 328 x 340 x 88	12 (13)	UK612K	2CPX031379R9999
UK624K	**Flush-mounted consumer units, 2-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting	480 x 367 x 95 453 x 340 x 88	24 (28)	UK624K	2CPX031380R9999
UK636K	**Flush-mounted consumer units, 3-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting	605 x 367 x 95 578 x 340 x 88	36 (41)	UK636K	2CPX031381R9999
UK648K	**Flush-mounted consumer units, 4-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting	730 x 367 x 95 703 x 340 x 88	48 (56)	UK648K	2CPX031382R9999
UK660K	**Flush-mounted consumer units, 5-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting	855 x 367 x 95 828 x 340 x 88	60 (70)	UK660K	2CPX031383R9999

> Technical specifications and dimensions see page 56

Consumer units UK600 without trim frame and door

With N/PE quick-terminals

Flush-mounted consumer units – UK600, IP30
I_n uo to 63 A
Consumer units DIN EN 60670-24, DIN 43871
For building installation according to DIN 18015
Mechanical impact strength: IK07
Available in 1 up to 5 row versions as flush-mounted consumer units
Can be upgraded for surface-mounting or partially recessed mounting
Upgradeable for hollow-wall-mounting using UZ91P4
Wall box:
- non-warp, break-proof, non-flammable, low-halogen plastic
- with cable strain relief comb
- with detachable cable inlets
- combinable
Wall grips
Reversible opening (tool-free)
Coupling set for horizontal and vertical connection
Device support with removable DIN rail
With N/PE quick-terminals
Wire holder for professional cable organization
Cover with 90° quick-action screws, lead-sealable
45 mm slots for 12 devices, expandable to 14
Labelling system
Trim frame and sheet steel door, adjustable for uneven surface
Colour: White, RAL 9016

*in connection with hollow-wall-mounting set UZ91P4

— 01 N/PE quick-terminals
— 02 Wall box
— 03 Device carrier
— 04 Cover

Consumer units UK600 without trim frame and door

With N/PE quick-terminals

Article		H x W x D (mm)	SU	Type	Ord.No.
UK612NB	**Flush-mounted consumer units, 1-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE quick-terminals:** ZK51B, ZK82B, ZK113G	355 x 367 x 95 328 x 340 x 88	12 (13)	UK612NB	2CPX031374R9999
UK624NB	**Flush-mounted consumer units, 2-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE quick-terminals:** ZK51B, 2 x ZK82B, ZK144G	480 x 367 x 95 453 x 340 x 88	24 (28)	UK624NB	2CPX031375R9999
UK636NB	**Flush-mounted consumer units, 3-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE quick-terminals:** ZK51B, 2 x ZK113B, ZK206G	605 x 367 x 95 578 x 340 x 88	36 (41)	UK636NB	2CPX031376R9999
UK648NB	**Flush-mounted consumer units, 4-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE quick-terminals:** 2 x ZK82B, ZK144B, ZK237G	730 x 367 x 95 703 x 340 x 88	48 (56)	UK648NB	2CPX031377R9999
UK660NB	**Flush-mounted consumer units, 5-row**				
	Niche dimensions for flush-mounting Wall cut out dimensions for hollow-wallmounting **With N/PE quick-terminals:** ZK51B, 2 x ZK82B, ZK144B, ZK268G	855 x 367 x 95 828 x 340 x 88	60 (70)	UK660NB	2CPX031378R9999

> N/PE quick-terminals, see page 38
> Technical specifications and dimensions see page 56

Consumer units

Spare parts and accessories AK600/UK600

Article		AK600	UK600	Pcs.	Type	Order code
UZT5	**Labelling system** Self-adhesive With labelling panels and numbers 1-70 with legend	●	●	1	UZT5	2CPX031429R9999
UZG636	**DIN rail and DIN rail frames***					
	To be used with AK61../UK61..	●	●	1	UZG612	2CPX031118R9999
	To be used with AK62../UK62..	●	●	1	UZG624	2CPX031119R9999
	To be used with AK63../UK63..	●	●	1	UZG636	2CPX031120R9999
	To be used with AK64../UK64..	●	●	1	UZG648	2CPX031121R9999
	To be used with AK66../UK66..	●	●	1	UZG660	2CPX031122R9999
ZA3P5	**Module blanking cover** Color: White, RAL 9016	●	●	5	ZA3P5	2CPX062385R9999
AZB1P4	**Quick-action screws AK600, lead-sealable** For pieces each for fastening the cover	●	–	4	AZB1P4	2CPX010996R9999
UZB3	**Horizontal segregation** with integrated terminal carrier and knock-out for two sockets, type ZE224 , and five knock-outs for communication jacks	-	●	1	UZB3	2CPX031409R9999
MZS12H	**Horizontal segregation AK600**	●	–	1	AZB2	2CPX010997R9999
UZM650	**Mounting plate, sheet steel, galvanized**					
	To be used with AK61../UK61.., H x B = 212 x 242 mm	●	●	1	UZM610	2CPX031414R9999
	To be used with AK62../UK62., H x B = 337 x 242 mm	●	●	1	UZM620	2CPX031415R9999
	To be used with AK63../UK63.., H x B = 462 x 242 mm	●	●	1	UZM630	2CPX031416R9999
	To be used with AK64../UK64.., H x B = 587 x 242 mm	●	●	1	UZM640	2CPX031417R9999
	To be used with AK66../UK66.., H x B = 712 x 242 mm	●	●	1	UZM650	2CPX031418R9999
UZT2	**TIP-in-closure** Colour: White, RAL 9016	●	●	1	UZT2	2CPX031411R9999
UZT3	**Closure with lock, standard** With 2 keys	●	●	1	UZT3	2CPX031412R9999
UZT4	**Closure with lock, Ronis 455** With 2 keys	●	●	1	UZT4	2CPX031413R9999

* For AK600, order individual DIN rails (e.g. for 5 row enclosure 5 x UZA612).

Consumer units

Spare parts and accessories AK600/UK600

Article		AK600	UK600	Pcs.	Type	Order code
UZB1	**Cable entry plate** With integrated terminal carrier Top or bottom, 1 to 5 rows Usable width for terminals 277 mm, 17 units	-	●	1	UZB1	2CPX031407R9999
	Version for drilling - tubes grommets entry	-	●	1	UZB4	2CPX077860R9999
ZA89P20	**Screws** 20 pcs. for fixing DIN rails and mounting plates	●	●	20	ZA89P20	2CPX062376R9999
UZT1	**Hinge set**	●	●	2	UZT1	2CPX031410R9999
AP636	**Wall-mounting set** For wall-mounting or partially recessed installation with predetermined breaking points, only suitable for standard door					
	To be used with UK61..	-	●	1	AP612	2CPX031402R9999
	To be used with UK62..	-	●	1	AP624	2CPX031403R9999
	To be used with UK63..	-	●	1	AP636	2CPX031404R9999
	To be used with UK64..	-	●	1	AP648	2CPX031405R9999
	To be used with UK66..	-	●	1	AP660	2CPX031406R9999
UZA636	**Cover with 90° quick-action screws**					
	To be used with UK61..	-	●	1	UZA612	2CPX031123R9999
	To be used with UK62..	-	●	1	UZA624	2CPX031124R9999
	To be used with UK63..	-	●	1	UZA636	2CPX031125R9999
	To be used with UK64..	-	●	1	UZA648	2CPX031126R9999
	To be used with UK66..	-	●	1	UZA660	2CPX031127R9999
UZ4P2	**Wall brackets** To fix the wall box in two mounting depths	-	●	4	UZ4P2	2CPX062447R9999
UZ91P4	**Hollow-wall mounting set** To modify the flush-mounting consumer unit into a hollowwall consumer unit UK600 (type label and 20 cable ties included) wall thickness min. 8 mm, max. 35 mm	-	●	4	UZ91P4	2CPX031434R9999
UZB2	**Coupling set UK600** for horizontal and vertical apposition and cross-wiring of the consumer units	-	●	1	UZB2	2CPX031408R9999

Consumer units

Trim frame with door and design foils AK600/UK600

Article		To be used with...	AK600	UK600	Pieces	Type	Order code
AZT610	**Door (standard)** Color: White, RAL 9016 sheet steel, powder coated	AK61..	●	●	1	AZT610	2CPX031149R9999
		AK62..	●	●	1	AZT620	2CPX031150R9999
		AK63..	●	●	1	AZT630	2CPX031151R9999
		AK64..	●	●	1	AZT640	2CPX031152R9999
		AK66..	●	●	1	AZT650	2CPX031153R9999
BL610	**Trim frame with door (standard)** Color: White, RAL 9016 sheet steel, powder coated	UK61..	-	●	1	BL610	2CPX031081R9999
		UK62..	-	●	1	BL620	2CPX031082R9999
		UK63..	-	●	1	BL630	2CPX031083R9999
		UK64..	-	●	1	BL640	2CPX031084R9999
		UK66..	-	●	1	BL650	2CPX031085R9999
BL611	**Trim frame with door** Color: Anthrazite, RAL 7016 sheet steel, powder coated	UK61..	-	●	1	BL611	2CPX031086R9999
		UK62..	-	●	1	BL621	2CPX031087R9999
		UK63..	-	●	1	BL631	2CPX031088R9999
		UK64..	-	●	1	BL641	2CPX031089R9999
		UK66..	-	●	1	BL651	2CPX031090R9999

Consumer units UK600

Project phases kits

Article		AK600	UK600	Pieces	Type	Order code
UZB636	**Wall box and brackets**					
	Fits for UK61..	-	●	1	UZB612	2CPX031113R9999
	Fits for UK62..	-	●	1	UZB624	2CPX031114R9999
	Fits for UK63..	-	●	1	UZB636	2CPX031115R9999
	Fits for UK64..	-	●	1	UZB648	2CPX031116R9999
	Fits for UK66..	-	●	1	UZB660	2CPX031117R9999
UZS636B	**Cover, DIN rails, and N/PE Quick terminals**					
	Fits for UK62..	-	●	1	UZS624B	2CPX031140R9999
	Fits for UK63..	-	●	1	UZS636B	2CPX031141R9999
	Fits for UK64..	-	●	1	UZS648B	2CPX031142R9999
	Fits for UK66..	-	●	1	UZS660B	2CPX031143R9999
UZS636N	**Trim frame with door, cover, DIN rails and N/PE Quick terminals**					
	Fits for UK63..	-	●	1	UZS636N	2CPX031133R9999
	Fits for UK64..	-	●	1	UZS648N	2CPX031134R9999
	Fits for UK66..	-	●	1	UZS660N	2CPX031135R9999
UZS636K	**Trim frame with door, cover, DIN rails for DIN rail terminals**					
	Fits for UK63..	-	●	1	UZS636K	2CPX031136R9999
	Fits for UK64..	-	●	1	UZS648K	2CPX031137R9999
	Fits for UK66..	-	●	1	UZS660K	2CPX031138R9999
UZS636M	**Multimedia kit, patch panel, mounting plates, DIN rail and device rubber strap.**					
	Fits for UK63..	-	●	1	UZS636M	2CPX077898R9999
	Fits for UK64..	-	●	1	UZS648M	2CPX077899R9999
	Fits for UK66..	-	●	1	UZS660M	2CPX077900R9999

Consumer units UK600

Design frame and inserts

A special highlight of the UK600 consumer unit system are the numerous door and frame options, which turn your consumer unit into an attractive design object at home.
Images, pinboards, mirrors, magnetic boards and much more may be inserted into the interchangeable design frame.

—
01 Basic version UK600

—
**02 Interchange-
able design frame**

—
03 Insert
Example with backlight foil

—
01

—
02

—
03

Consumer units UK600

Design frame and inserts

Article		To be used with ...	AK600	UK600	Pcs.	Type	Order code
BL630D	**Interchangeable design frame** Brushed aluminium, stainless steel optic	UK63..	-	●	1	BL630D	2CPX031795R9999
		UK64..	-	●	1	BL640D	2CPX031796R9999
		UK66..	-	●	1	BL650D	2CPX031797R9999
	Inserts for interchangeable design frame						
UZD630	**Image-Insert** For your own images as you wish	UK62..	-	●	1	UZD620	2CPX031762R9999
		UK63..	-	●	1	UZD630	2CPX031768R9999
		UK64..	-	●	1	UZD640	2CPX031774R9999
		UK66..	-	●	1	UZD650	2CPX031780R9999
UZD632	**Mirror insert**	UK62..	-	●	1	UZD622	2CPX031764R9999
		UK63..	-	●	1	UZD632	2CPX031770R9999
		UK64..	-	●	1	UZD642	2CPX031776R9999
		UK66..	-	●	1	UZD652	2CPX031782R9999
UZD634	**LED panel insert** With backlight foil B12 V DC REG voltage supply must be ordered separately	UK62..	-	●	1	UZD624	2CPX031766R9999
		UK63..	-	●	1	UZD634	2CPX031772R9999
		UK64..	-	●	1	UZD644	2CPX031778R9999
		UK66..	-	●	1	UZD654	2CPX031784R9999

* For Technical Specifications, please refer to page 60

N/PE quick terminals

Consumer units AK600/UK600

Configure based on your needs

The modularity and the extensive range of products allow customizing the products to the needs based on real-world use. Various quick-terminals can be combined on one quick carrier as necessary. If a larger N or PE terminal has to be used, simply connect two quick-terminals using the ZK10P10 connecting bridge.

Product benefits

- Flexible terminal system for several N potentials: Screw connections: 2.5 to 25 mm² for rigid conductors; for flexible conductors up to 25 mm² (wire end sleeves required)
- Spring connection: 1.5 to 4 mm² for rigid conductors; for flexible conductors up to 25 mm2 (wire end sleeves required)
- Optimal when using several residual current circuit breakers
- Ease of expansion using connecting bridges
- Precise assignment of the terminals by clear colour coding: N = blue, PE = yellow-green
- Easy labelling of the terminals using pre-printed, self-adhesive number strips
- Wide range of applications: may be used in consumer unit series, in all compact distribution boards, and with all meter cabinets, wall-mounting and floor-standing cabinets

N/PE terminals with units	N quick-terminals	Type	Screw connection system	Spring connection system	PE quick-terminals	Type	Screw connection system	Spring connection system
		ZK50B 41Z70 ZK50BT	0 x 25 mm²	5 x 1.5 – 4 mm²	-	-	-	-
		ZK51B 41Z71	1 x 25 mm²	5 x 1.5 – 4 mm²		ZK51G 41Z77	1 x 25 mm²	5 x 1.5 – 4 mm²
		ZK82B 41Z72	2 x 25 mm²	8 x 1.5 – 4 mm²		ZK82G 41Z78	2 x 25 mm²	8 x 1.5 – 4 mm²
		ZK113B 41Z73	3 x 25 mm²	11 x 1,5 – 4 mm²		ZK113G 41Z79	3 x 25 mm²	11 x 1.5 – 4 mm²
		ZK144B 41Z74	4 x 25 mm²	14 x 1.5 – 4 mm²		ZK144G 41Z80	4 x 25 mm²	14 x 1.5 – 4 mm²
		ZK175B 41Z75	5 x 25 mm²	17 x 1.5 – 4 mm²		ZK175G 41Z81	5 x 25 mm²	17 x 1.5 – 4 mm²
		ZK206B 41Z76	6 x 25 mm²	20 x 1.5 – 4 mm²		ZK206G 41Z82	6 x 25 mm²	20 x 1.5 – 4 mm²
		ZK237B 41Z150	7 x 25 mm²	23 x 1.5 – 4 mm²		ZK237G 41Z152	7 x 25 mm²	23 x 1.5 – 4 mm²
		ZK268B 41Z151	8 x 25 mm²	26 x 1.5 – 4 mm²		ZK268G 41Z153	8 x 25 mm²	26 x 1.5 – 4 mm²

N/PE quick terminals

Consumer units AK600/UK600

Article		Number terminals 1.5 x 4 mm²	Number terminals 2,5 – 25 mm²	maximum rated current [A]	Pcs.	Type	Ord.No.
ZK51B	**N quick-plug terminals** For terminal carriers	5 x 1.5 – 4	0 x 25	63	1	ZK50B	2CPX062750R9999
					5/280	41Z70	1SPE007715F9701
		5 x 1.5 – 4	1 x 25	63	1	ZK51B	2CPX062751R9999
					5/180	41Z71	1SPE007715F9702
		8 x 1.5 – 4	2 x 25	63	1	ZK82B	2CPX062752R9999
					5/150	41Z72	1SPE007715F9703
		11 x 1.5 – 4	3 x 25	63	1	ZK113B	2CPX062753R9999
					5/100	41Z73	1SPE007715F9704
		14 x 1.5 – 4	4 x 25	63	1	ZK144B	2CPX062754R9999
					5/90	41Z74	1SPE007715F9705
		17 x 1.5 – 4	5 x 25	63	1	ZK175B	2CPX062755R9999
					5/70	41Z75	1SPE007715F9706
		20 x 1.5 – 4	6 x 25	63	1	ZK206B	2CPX062756R9999
					5/60	41Z76	1SPE007715F9707
		23 x 1.5 – 4	7 x 25	63	1	ZK237B	2CPX063163R9999
					5	41Z150	1SPE007715F9708
		26 x 1.5 – 4	8 x 25	63	1	ZK268B	2CPX063164R9999
					5	41Z151	1SPE007715F9709
ZK50BT	**N quick-plug terminals** With adapter ZK15 for lateral assembling in the UK6... or for fastening to the DIN rail	5 x 1.5 – 4	0 x 25	63	1	ZK50BT	2CPX062745R9999
ZK51G	**PE quick-plug terminals** For terminal carriers	5 x 1.5 – 4	1 x 25	63	1	ZK51G	2CPX062757R9999
					5/180	41Z77	1SPE007715F9712
		8 x 1.5 – 4	2 x 25	63	1	ZK82G	2CPX062758R9999
					5/150	41Z78	1SPE007715F9713
		11 x 1.5 – 4	3 x 25	63	1	ZK113G	2CPX062759R9999
					5/100	41Z79	1SPE007715F9714
		14 x 1.5 – 4	4 x 25	63	1	ZK144G	2CPX062760R9999
					5/90	41Z80	1SPE007715F9715
		17 x 1.5 – 4	5 x 25	63	1	ZK175G	2CPX062761R9999
					5/70	41Z81	1SPE007715F9716
		20 x 1.5 – 4	6 x 25	63	1	ZK206G	2CPX062762R9999
					5/60	41Z82	1SPE007715F9717
		23 x 1.5 – 4	7 x 25	63	1	ZK237G	2CPX063165R9999
					5	41Z152	1SPE007715F9718
		26 x 1.5 – 4	8 x 25	63	1	ZK268G	2CPX063166R9999
					5	41Z153	1SPE007715F9719
ZK10P10	**Quick terminlas connection terminals** For terminal carriers				10	ZK10P10	2CPX062763R9999
ZK600	**Terminals-carriers for UK6...** Usable width for terminals 247 mm 15 units				1	ZK600	2CPX063178R9999
ZK21	**Terminals-carriers for AK6...** Usable width for terminals 263 mm, 16 units				1	ZK21	1SPE007715F0752
UZB1	**Cable entry plate for UK600** With integrated terminal carrier Top or bottom, 1 to 5 rows Usable width for terminals 277 mm, 17 units				1	UZB1	2CPX031407R9999

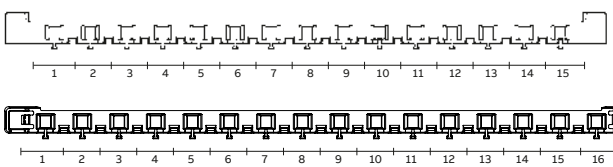

Terminal-carriers Typ ZK600 for UK600

Units

Terminal-carriersr Typ ZK21 for AK600

Units

N/PE screw terminals

Consumer units AK600/UK600

Configure based on your needs

The modularity and the extensive range of products allow customizing the new products to the needs based on realworld use. Various terminals can be combined on one common carrier as necessary.

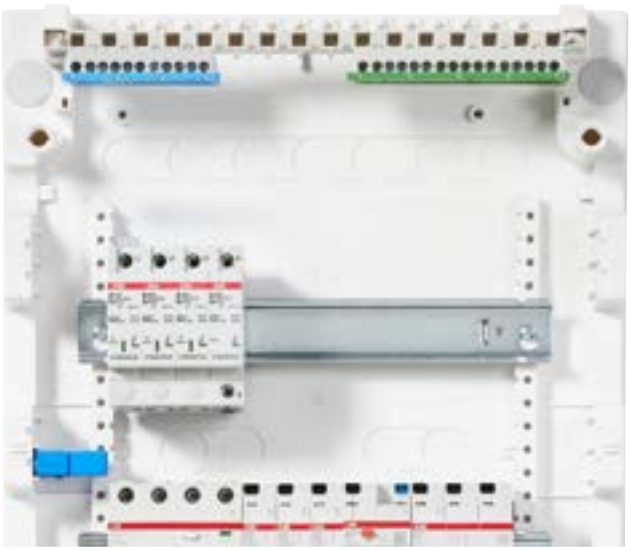

Product benefits

- Flexible terminal system for several N potentials: Screw connections: 1.5 to 16 mm² for rigid conductors; for flexible conductors up to 16 mm2 (wire end sleeves required)
- Optimal when using several residual current circuit breakers
- Precise assignment of the terminals by clear colour coding: N = blue, PE = yellow-green
- Easy labelling of the terminals using pre-printed, self-adhesive number strips
- Wide range of applications: may be used in unit series, in all compact distribution boards, and with all meter cabinets, wall-mounting and floor-standing cabinets

N/PE Klemmblöcke mit Einheiten	N screw-terminals	Types	Screw connection system mm²	mm²	PE screw-terminals	Type	Screw connection system mm²	mm²
		ZKS6B 41Z57	3 x 6	5 x 16		ZKS6G 41Z62	3 x 6	5 x 16
		ZKS11B 41Z58	5 x 6	5 x 16		ZKS11G 41Z63	5 x 6	5 x 16
		ZKS16B 41Z59	9 x 6	7 x 16		ZKS16G 41Z63	9 x 6	7 x 16
		ZKS21B 41Z60	12 x 6	9 x 16		ZKS21G 41Z65	12 x 6	9 x 16
		ZKS26B 41Z61	15 x 6	11 x 16		ZKS26G 41Z66	15 x 6	11 x 16

N/PE screw terminals

Consumer units AK600/UK600

Article		Anzahl Klemmen 1,5 – 4 mm²	Anzahl Klemmen 2,5 – 25 mm²	maximum rated current [A]	Pcs.	Type	Order code
ZKS11B	**N screw terminals** For terminal carriers	3 x 6	3 x 16	100	1	ZKS6B	2CPX063167R9999
					5/270	41Z57	1SPE007715F0731
		6 x 6	5 x 16	100	1	ZKS11B	2CPX063168R9999
					5/150	41Z58	1SPE007715F0732
		9 x 6	7 x 16	100	1	ZKS16B	2CPX063169R9999
					5/120	41Z59	1SPE007715F0733
		12 x 6	9 x 16	100	1	ZKS21B	2CPX063170R9999
					5/90	41Z60	1SPE007715F0734
		15 x 6	11 x 16	100	1	ZKS26B	2CPX063171R9999
					5/90	41Z61	1SPE007715F0735
ZKS11G	**PE screw terminals** For terminal carriers	3 x 6	3 x 16	100	1	ZKS6G	2CPX063172R9999
					5/270	41Z62	1SPE007715F0741
		6 x 6	5 x 16	100	1	ZKS11G	2CPX063173R9999
					5/150	41Z63	1SPE007715F0742
		9 x 6	7 x 16	100	1	ZKS16G	2CPX063174R9999
					5/120	41Z64	1SPE007715F0743
		12 x 6	9 x 16	100	1	ZKS21G	2CPX063175R9999
					5/90	41Z65	1SPE007715F0744
		15 x 6	11 x 16	100	1	ZKS26G	2CPX063176R9999
					5/90	41Z66	1SPE007715F0745
ZK507	**RCD terminal for lateral and DIN rail installation** 3 x 16 mm² + 2 x 10 mm2 Cu pluggable				1	ZK507	2CPX030892R9999
ZK600	**Terminal-carriers for UK6...** Usable width for terminals 247 mm 15 units				1	ZK600	2CPX063178R9999
ZK21	**Terminal-carriers for AK6...** Usable width for terminals 263 mm, 16 units				1	ZK21	1SPE007715F0752
UZB1	**Cable entry plate for UK600** With integrated terminal carrier Top or bottom, 1 to 5 rows Usable width for terminals 277 mm, 17 units				1	UZB1	2CPX031407R9999

Terminals-carriers Typ ZK600 for UK600

Units



Terminals-carriersr Typ ZK21 for AK600

Units

Media enclosure AK600

Fully equipped with 3-gang socket and universal patch panel - without door

Wall-mounted media enclosure – AK600, IP20*/IP30
Consumer unit AK600 as multimedia version
Mechanical impact strength: IK07
Available in 2 up to 5 row versions as wall-mounted consumer units
Wall box:
- non-warp, break-proof, non-flammable, low-halogen plastic
- with cable strain relief comb
- combinable
With removable DIN rail in the top row
Patch panel in isolated design for up to 12 keystone and EDAT modules
Modular perforated sheet steel mounting plate for devices
Simple and tool-free installation of the devices using the "device strap"
120° swiveling triple socket for the power supply of built-in devices
Wire holder for professional cable organization

01 Base

02 Removable DIN-rail

03 Universal Patch panel

04 Removable modular perforated sheet steel mounting plate

05 3-gang snap-in socket, 120° rotatable

06 Cover with 90° quick-action screws, lead-sealable

07 Sheet steel door with WiFi insert (Accessories)

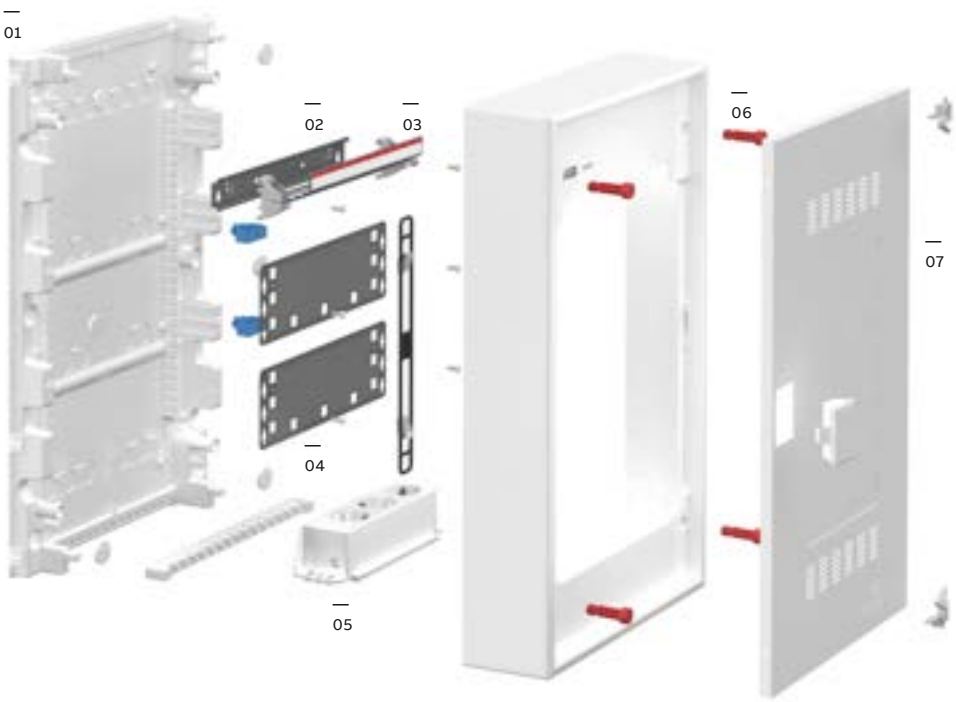

Media enclosure AK600

Fully equipped with 3-gang socket and universal patch panel - without door

Article		H x W x D (mm)	Pcs.	Type	Order code
	Wall-mounted media enclosure without door, 3 rows				
AK636M	Enclosure with removable modular perforated sheet steel mounting plates, removable DIN rails, wire holders for cable entry, 12-fold patch panels with knock-outs for keystone and EDAT modules*, Snap-in 3-gang-socket,120° rotatable with EURO-insert, Rubber device holder for tool-free mounting, without door	578 x 339 x 98	1	AK636M	2CPX031811R9999
	Wall-mounted media enclosure without door, 4 rows				
AK648M	Enclosure with removable modular perforated sheet steel mounting plates, removable DIN rails, wire holders for cable entry, 12-fold patch panels with knock-outs for keystone and EDAT modules*, Snap-in 3-gang-socket,120° rotatable with EURO-insert, Rubber device holder for tool-free mounting, without door	703 x 339 x 98	1	AK648M	2CPX031812R9999
	Wall-mounted media enclosure without door, 5 rows				
AK660M	Enclosure with removable modular perforated sheet steel mounting plates, removable DIN rails, wire holders for cable entry, 12-fold patch panels with knock-outs for keystone and EDAT modules*, Snap-in 3-gang-socket,120° rotatable with EURO-insert, Rubber device holders for tool-free mounting, without door	828 x 339 x 98	1	AK660M	2CPX031813R9999

* Specifications for perforations for patch panel modules, see page 62

Media enclosure AK600

Basic version without door

Wall-mounted media enclosure – AK600, IP20*/IP30
Consumer unit AK600 as multimedia version
Mechanical impact strength: IK07
Available in 3 up to 5 row versions as wall-mounted consumer units
Wall box:
- non-warp, break-proof, non-flammable, low-halogen plastic
- with cable strain relief comb
- with detachable DIN rail
- combinable
With removable DIN rail in the top row
Modular perforated sheet steel mounting plate for devices
Simple and tool-free installation of the devices using the "device strap"
Wire holder for professional cable organization

— 01 Base

— 02 Removable DIN rails

— 03 Removable modular perforated sheet steel mounting plate

— 04 Cover with 90° quick-action screws, lead-sealable

— 05 Sheet steel door with WiFi insert (Accessories)

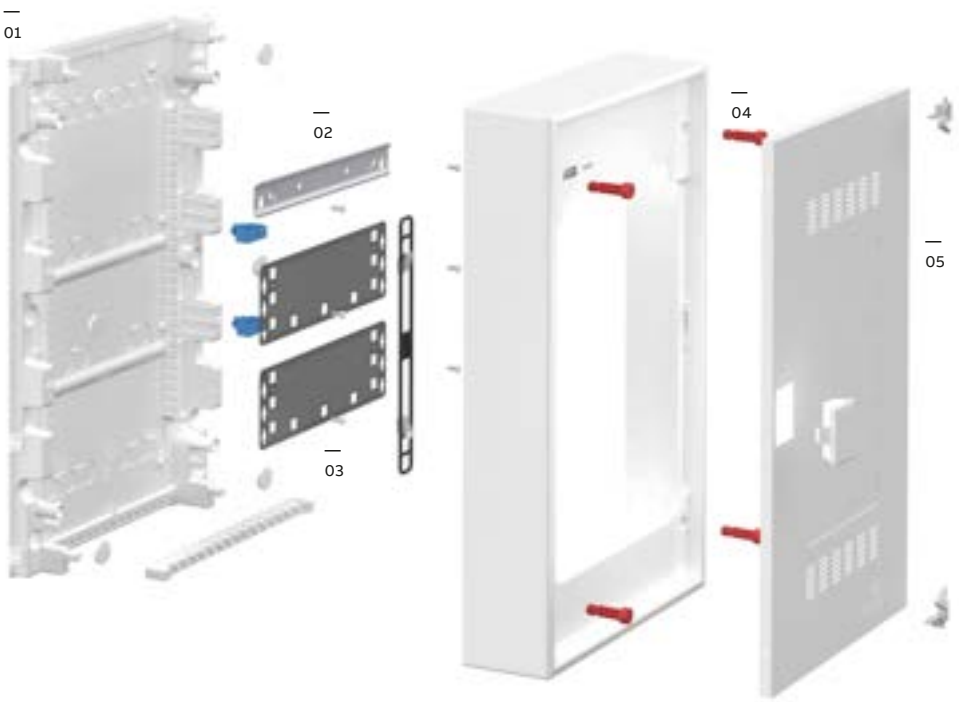

Media enclosure AK600

Basic version without door

Article		H x W x D (mm)	Pcs.	Type	Order code
AK620MB	**Wall-mounted media enclosure without door, 2 rows**				
	Enclosure with removable modular perforated sheet steel mounting plates, removable DIN rails, wire holders for cable entry, rubber device holder for tool-free mounting, without door	453 x 339 x 98	1	AK620MB	2CPX031814R9999
AK630MB	**Wall-mounted media enclosure without door, 3 rows**				
	Enclosure with removable modular perforated sheet steel mounting plates, removable DIN rails, wire holders for cable entry, rubber device holder for tool-free mounting, without door	578 x 339 x 98	1	AK630MB	2CPX031815R9999
AK640MB	**Wall-mounted media enclosure without door, 4 rows**				
	Enclosure with removable modular perforated sheet steel mounting plates, removable DIN rails, wire holders for cable entry, rubber device holder for tool-free mounting, without door	703 x 339 x 98	1	AK640MB	2CPX031816R9999
AK650MB	**Wall-mounted media enclosure without door, 5 rows**				
	Enclosure with removable modular perforated sheet steel mounting plates, removable DIN rails, wire holders for cable entry, rubber device holders for tool-free mounting, without door	828 x 339 x 98	1	AK650MB	2CPX031817R9999

Media enclosure UK600

Enclosure with and without trim frame and door

Flush-mounted consumer units – UK600, IP30
Consumer units UK600 as multimedia version,
dimensions according to the standard enclosures as per DIN 43871
Mechanical impact strength: IK07
Available in 2 up to 5 row versions as flush-mounted consumer units
Can be upgraded for surface-mounting or partially recessed mounting
Upgradeable for hollow-wall-mounting using UZ91P4
Wall box:
- non-warp, break-proof, non-flammable, low-halogen plastic
- with cable strain relief comb
- with detachable cable inlets
- combinable
Reversible opening (tool-free)
Communication channel for horizontal and vertical connection
With removable DIN rail in the top row
Patch panel in isolated design for up to 12 keystone modules
Modular perforated sheet steel mounting plate for devices
Simple and tool-free installation of the devices using the "device strap"
120° swiveling triSU socket for the power supply of built-in devices
Wire holder for professional cable organization
With trim frame and sheet steel doors as sheet steel door with white half transparent plastic insert, for improved Wifi signals or as
basic option without trim frame and door

*in connection with hollow-wall-mounting set UZ91P4

Media enclosure UK600

Enclosure with and without trim frame and door

Article		Dimensions	H x W x D (mm)	Pcs.	Type	Ord. no.
	Flush-mounted media enclosure with trim frame and ventilated Wifi door					
UK636MV	Wall box with modular perforated sheet steel mounting plates and removable DIN rail Wire holder for cable entry Patch panel for up to 12 keystone modules, Snap-on triSU socket swiveling 120° with EURO insert Device strap for tool-free installation. Sheet steel door ventilated	3 rows Niche wall cut out	605 x 367 x 95 578 x 340 x 88	1	UK636MV	2CPX031384R9999
		4 rows Niche wall cut out	730 x 367 x 95 703 x 340 x 88	1	UK648MV	2CPX031385R9999
		5 rows Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK660MV	2CPX031386R9999
	Flush-mounted media enclosure with trim frame and door with ventilation holes					
UK636MW	Wall box with modular perforated sheet steel mounting plates and removable DIN rail Wire holder for cable entry Patch panel for up to 12 keystone modules, Snap-on triSU socket swiveling 120° with EURO insert Device strap for tool-free installation. Sheet steel door with white plastic insert 30% transparent, for improved Wifi signals	3 rows Niche wall cut out	605 x 367 x 95 578 x 340 x 88	1	UK636MW	2CPX031387R9999
		4 rows Niche wall cut out	730 x 367 x 95 703 x 340 x 88	1	UK648MW	2CPX031388R9999
		5 rows Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK660MW	2CPX031389R9999
	Flush-mounted media enclosure with trim frame and door with ventilation holes					
UK630MV	Wall box with modular perforated sheet steel mounting plates and removable DIN rail Wire holder for cable entry Dual socket with mounting bracket Device strap for tool-free installation Sheet steel door ventilated	2 rows Niche wall cut out	480 x 367 x 95 453 x 340 x 88	1	UK620MV	2CPX031390R9999
		3 rows Niche wall cut out	605 x 367 x 95 578 x 340 x 88	1	UK630MV	2CPX031391R9999
		4 rows Niche wall cut out	730 x 367 x 95 703 x 340 x 88	1	UK640MV	2CPX031392R9999
		5 rows Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK650MV	2CPX031393R9999
	Flush-mounted media enclosure with trim frame and door with ventilation holes, without socket					
UK630MVB	Wall box with modular perforated sheet steel mounting plates and removable DIN rail Wire holder for cable entry Without socket Device strap for tool-free installation Sheet steel door ventilated	2 rows Niche wall cut out	480 x 367 x 95 453 x 340 x 88	1	UK620MVB	2CPX031454R9999
		3 rows Niche wall cut out	605 x 367 x 95 578 x 340 x 88	1	UK630MVB	2CPX031455R9999
		4 rows Niche wall cut out	730 x 367 x 95 703 x 340 x 88	1	UK640MVB	2CPX031456R9999
		5 rows Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK650MVB	2CPX031457R9999
	Flush-mounted media enclosure as basis without trim frame and door					
UK630MB	Wall box with modular perforated sheet steel mounting plates and removable DIN rail Wire holder for cable entry Mounting bracket Device strap for tool-free installation	2 rows Niche wall cut out	480 x 367 x 95 453 x 340 x 88	1	UK624MB	2CPX031394R9999
		3 rows Niche wall cut out	605 x 367 x 95 578 x 340 x 88	1	UK636MB	2CPX031395R9999
		4 rows Niche wall cut out	730 x 367 x 95 703 x 340 x 88	1	UK648MB	2CPX031396R9999
		5 rows Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK660MB	2CPX031397R9999

* Specifications for perforations for patch panel modules, see page 62

Combi enclosure UK600

With trim frame and ventilated or WiFi door

Flush-mounted consumer units – UK600, IP30
I_n up to 63 A
Combi enclosure as consumer unit and media enclosure
dimensions according to the standard enclosures as per DIN 43871
For building installation according to DIN 18015
Mechanical impact strength: IK07
Available as 2 or 3 row versions as flush-mounted consumer units
Can be upgraded for surface-mounting or partially recessed mounting
Upgradeable for hollow-wall-mounting using UZ91P4
Wall box:
- non-warp, break-proof, non-flammable, low-halogen plastic
- with cable strain relief comb
- with detachable cable inlets
- combinable
Reversible opening (tool-free)
Coupling set for horizontal and vertical connection
With N/PE quick-plug terminal
Cover with 90° quick-action screws, lead-sealable
45 mm slots for 12 devices, expandable to 14
Labelling system
Standardized separation of the voltage levels using a partition with knock-out for socket and media modules
Modular perforated sheet steel mounting plate for devices
Simple and tool-free installation of the devices using the "device strap"
“Click in” socket, swiveling 90° for the power supply of built-in devices
Wire holder for professional cable organization
With trim frame and sheet steel door or sheet steel door, with white, half transparent plastic insert, for improved Wifi signals

*in connection with hollow-wall-mounting set UZ91P4

Combi enclosure UK600

With trim frame and ventilated or WiFi door

Article		Dimensions	H x W x D (mm)	Pcs.	Type	Ord. no.
UK662CV	**Flush-mounted combi enclosure with trim frame and ventilated door**					
	Wall box with modular perforated sheet steel mounting plates and removable device support Wire holder for cable entry Partition for electrical isolation, snap-on socket, swiveling 90° with EURO insert “Device strap” for tool-free installation Sheet steel door ventilated	2 rows* Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK662CV	2CPX031398R9999
		3 rows Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK663CV	2CPX031399R9999
UK662CVC	**Flush-mounted combination enclosure with trim frame and ventilated Wifi door**					
	Wall box with modular perforated sheet steel mounting plates and removable device support Wire holder for cable entry Partition for electrical isolation, “Device strap” for tool-free installation Sheet steel door ventilated	2 rows* Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK662CVC	2CPX031450R9999
		3 rows Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK663CVC	2CPX031451R9999
UK662CW	**Flush-mounted combi enclosure with trim frame and ventilated door**					
	Wall box with modular perforated sheet steel mounting plates and removable device support Wire holder for cable entry Partition for electrical isolation, snap-on socket, swiveling 90° with EURO insert “Device strap” for tool-free installation Sheet steel door ventilated with white 30% transparent plastic insert for improved Wifi signals	2 rows* Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK662CW	2CPX031400R9999
		3 rows Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK663CW	2CPX031401R9999
UK662CWC	**Flush-mounted combination enclosure with trim frame and ventilated Wifi door**					
	Wall box with modular perforated sheet steel mounting plates and removable device support Wire holder for cable entry Partition for electrical isolation, “Device strap” for tool-free installation Sheet steel door ventilated with white 30% transparent plastic insert for improved Wifi signals	2 rows* Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK662CWC	2CPX031452R9999
		3 rows Niche wall cut out	855 x 367 x 95 828 x 340 x 88	1	UK663CWC	2CPX031453R9999

* Lock not centered - lock position only left side, right side on request

Media enclosure

Spare parts & accessories AK600/UK600

Article		AK600	UK600	Pcs.	Type	Order code
 UZM61M	**Perforated mounting plate** for media enclosures	●	●	1	UZM61M	2CPX031421R9999
ZX340	**Media device holder** with 2 clips for assembly, e.g. UZM61M Elastic rubber device strap	●	●	1	ZX340	2CPX031422R9999
ZEP12	**Universal Patch panel incl. support*** Empty for communication modules, the panel can be used for Keystone and EDAT modules					
	12 keystone or EDAT modules	●	●	1	ZEP12	2CPX054072R9999
ZE335	Keystone, 6-fold	●	●	1	ZE335	2CPX031423R9999
ZE338	**Patch panel holder**			1	ZE338	2CPX031426R9999
ZE224	**Single socket** Snap-in, rotatable 90° with touch guard and strain relief, for assembling to partition UZB3 with EURO insert	-	●	1	ZE224	2CPX031427R9999
ZE228	**Single socket (CH version)** Snap-in, rotatable 90°, for assembling to partition UZB3				ZE228	2CPX061212R9999
ZE227	**Triple socket** 230 V AC voltage, 120° swiveling with EURO insert to be snapped on to the cable inlet or DIN rail; to be screwed to the mounting plate	●	●	1	ZE227	2CPX061211R9999
ZE225	**Horizontal partition with integrated terminal carrier,** Knock-out for two sockets, type ZE224 and five knock-outs for communications racks	-	●	1	UZB3	2CPX031409R9999
UZB3	**Dual socket** 230 V AC voltage for assembling to mounting plate ZX29 with EURO insert	-	●	1	ZE225	2CPX061177R9999

* Specifications for perforations for patch panel modules, see page 62

Media enclosure

Spare parts & accessories AK600/UK600

Article		AK600	UK600	Pcs.	Type	Order code
ZX29	**Mounting plate** For clamping on to terminal carrier or for assembling to the perforated sheet steel plate of the media enclosures and of the 1MM... media panels	●	●	1	ZX29	2CPX061178R9999
UZED1	**Wire holder** for professional cable organization and insertion into the perforated mounting plate	●	●	10	UZED1P10	2CPX031420R9999
ZX287P10	**Screws** M4 x 14 thread rolling for the perforated sheet steel mounting plate	●	●	10	ZX287P10	2CPX061180R9999
ZE311 ZE312	**Connectors for patch panels**					
	RJ45 module					
	Plastic	●	●	1	ZE311	2CPX038612R9999
	Metal	●	●	1	ZE312	2CPX038613R9999
ZE316 ZE317	**COAX module** F/F connector	●	●	1	ZE316	2CPX039246R9999
	COAX module IEC connector	●	●	1	ZE317	2CPX039247R9999
	COAX module IEC plug	●	●	1	ZE318	2CPX039248R9999
ZE318 ZE319	**OpDAT module** LC guide sleeve, ceramics	●	●	1	ZE319	2CPX039249R9999
ZB122	**Insulating tube** For communication line	●	●	1	ZB122	2CPX071112R9999

Media enclosure

Doors

Article	Suitable for...	AK600	UK600	Type	Order code	Pieces
	Doors for AK600 and UK600					
AZT620V	**Sheet steel door with ventilation slots** Color: White RAL 9016, Sheet steel, powder-coated	• AK62..	• UK62..	AZT620V	2CPX031154R9999	1
		• AK63..	• UK63..	AZT630V	2CPX031155R9999	1
		• AK64..	• UK64..	AZT640V	2CPX031156R9999	1
		• AK66..	• UK66..	AZT660V	2CPX031157R9999	1
AZT620W	**WiFi door with ventilation slots and plastic insert** Color: White RAL 9016, Sheet steel, powder-coated with white 30% transparent plastic insert, for improved WiFi signal	• AK62..	• UK62..	AZT620W	2CPX031158R9999	1
		• AK63..	• UK63..	AZT630W	2CPX031159R9999	1
		• AK64..	• UK64..	AZT640W	2CPX031160R9999	1
		• AK66..	• UK66..	AZT660W	2CPX031161R9999	1
	Trim frame and door for UK600					
BL620V	**Trim frame with door and ventilation holes** Color: White, RAL 9016 Sheet steel, powder-coated	-	• UK62..	BL620V	2CPX031091R9999	1
		-	• UK63..	BL630V	2CPX031092R9999	1
		-	• UK64..	BL640V	2CPX031093R9999	1
		-	• UK66..	BL650V	2CPX031094R9999	1
		-	• UK662CV*	BL652V	2CPX031099R9999	1
BL620W	**Trim frame with WiFi door with ventilation slots and plastic insert** Color: White RAL 9016, Sheet steel, powder-coated with white plastic insert, for improved WiFi signal	-	• UK62..	BL620W	2CPX031095R9999	1
		-	• UK63..	BL630W	2CPX031096R9999	1
		-	• UK64..	BL640W	2CPX031097R9999	1
		-	• UK66..	BL650W	2CPX031098R9999	1
		-	• UK662CW*	BL652W	2CPX031100R9999	1

* Door handle not centered, door hinge only possible on the right, door hinge on the left on request.

Notes

MISTRAL41 and MISTRAL Multimedia
Sustainability, flexibility and design

Innovating today does not just mean looking for functional and techno-logically advanced solutions. For ABB, being innovative means embracing a longer-term perspective by using eco-compatible materials for our products which respect the environment even at the end of their life cycle. For this reason, 100 % recyclable halogen-free thermoplastics (for GWT650 versions) have been used for the consumer units. Their environmental compatibility has been evaluated using the Life Cycle Assessment (LCA) method, an objective tool for assessing energy and environmental impact which analyses the energy and materials used and the emissions released during production.

Halogen Free

(for GWT650 versions)

Everything about the MISTRAL series has been designed to make installation easier, allowing you to set up high-quality consumer units that look great anywhere.

Smarter multimedia space
The MISTRAL consumer units can now also integrate all your multimedia equipment, ranging from internet routers to switch panels, antenna and voice splitters and socket outlets. MISTRAL multimedia is available for both flush and hollow-wall installation and comes with a variety of accessories.

Elegant design features
The range of design features includes transparent or opaque doors that open up to 180° enabling full access to the interior of the units. Perfect symmetry also means you can rotate either the front panel or the entire unit to let the door open from the right or the left.

Fast and easy installation
Ample internal space makes cabling fast and easy, and also enables you to anchor cable ties to special eyeholes in the frame. Various snap-on terminal blocks in two different colours can be installed in both the upper and lower part of the units, offering you even more flexibility. The MISTRAL41 series is also fully compatible with a unified range of accessories for a wide variety of applications.

MISTRAL41F
Always a perfect solution for every wall

Our MISTRAL41F series of consumer units gives you the freedom and flexibility to install any type of electrical distribution system in residential buildings. Choose from a brick walll or hollow wall version to meet your individual needs. These IP41-rated units have been designed from scratch to enhance the unique features you expect from ABB in terms of versatility, efficiency and safety. The MISTRAL41F series is one of the widest ranges on the market, so there always is a solution to fit your requirements. The units come in various sizes with three cable entry options and space for up to 72 modules. Everything about the MISTRAL41F series has been designed to make installation easier, allowing you to set up high-quality consumer units you can be proud of.

Reliable technology combined with a modern decorative look in a compact, elegant design.

Door opens up to 180° allowing full access to the interior of the unit.

The symmetrical design allows opening of the reversible door either from the left or from the right.

Door available in two versions: petrol blue and opaque.

Multimedia version for integration of internet routers, antenna or voice splitters.

In the flush-mounted version the depth of the base box ensures a perfect balance between internal space and the possibility of installation in thin walls.

Endless installation possibilities

Horizontal coupling
The consumer units can be coupled side by side with the horizontal junction unit accessory, protecting the passage of cables between adjacent units.

Mortar guard
All versions include a mortar guard that prevents mortar sprays inside the consumer unit.

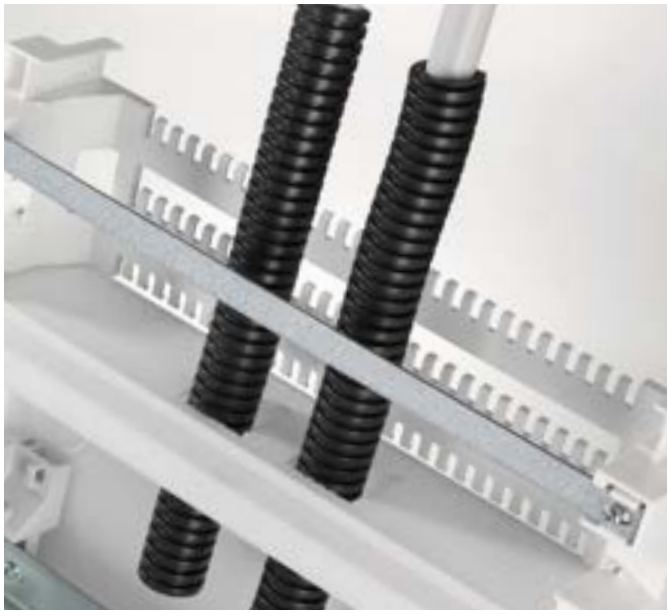

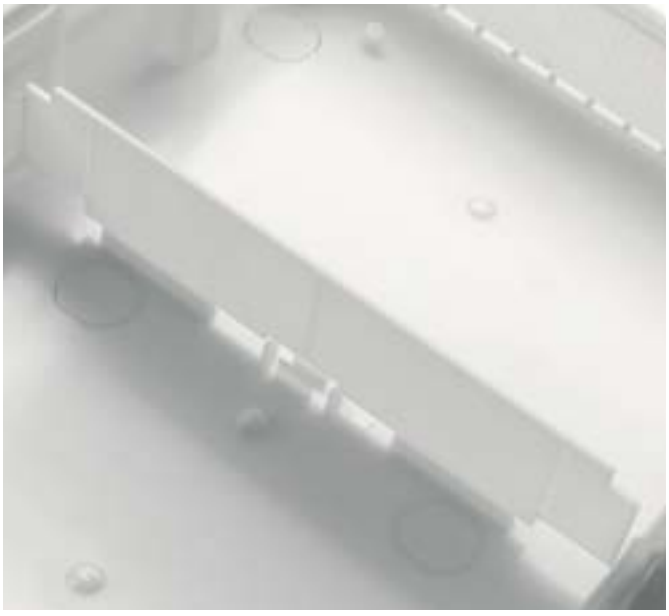

Dual-function accessory
A single accessory performs a dual function. It can be used to fix pipes to the unit's housing or to vertically couple two consumer units.

Internal partition
The horizontal partition allows the interior of the unit to be divided into two parts.

Endless installation possibilities

Flanges
The flange with multi pre-cuts is designed to be sheared only where necessary in order to ensure a more secure fastening. The removable flange with knockout holes ensure a reliable and safe placing of flexible pipes and other conduits, especially in plasterboard installation.

Two DIN rail positions
The extraxtable frame offers two DIN rail positions so devices of different depths, like S200 or S800 miniature circuit breakers, can be installed in perfect alignment.

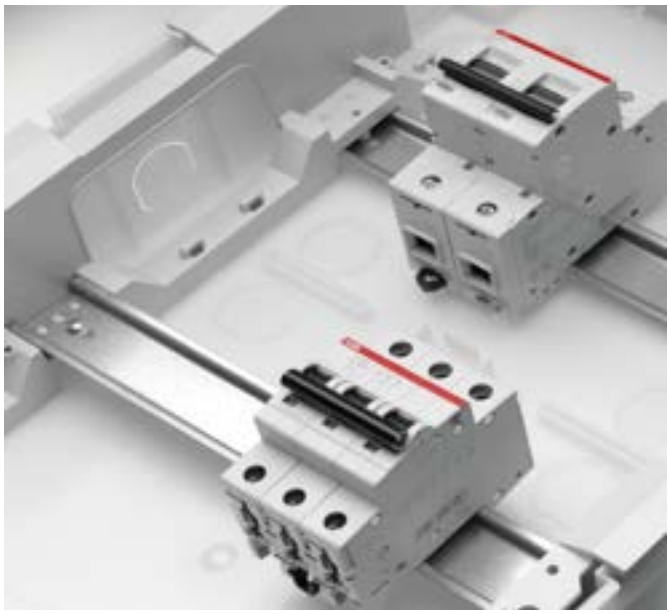

Captive screw covers
Screw covers are hooked to the front panel so they can be removed without the risk of losing them.

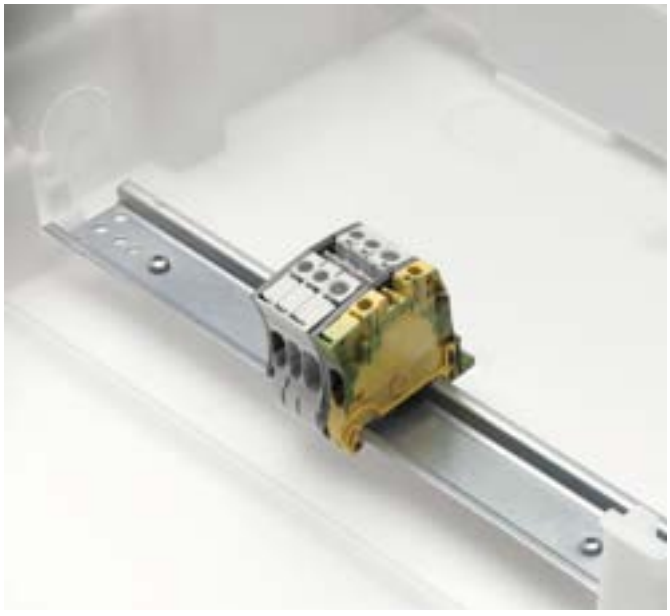

DIN rail terminals
It is possible to install an extra DIN rail at the bottom of the consumer unit.

A versatile range suitable for every application

The simple construction of the MISTRAL41F series makes the units fast and easy to assemble. What is more, the flexible design allows easy adaptation to various application requirements.

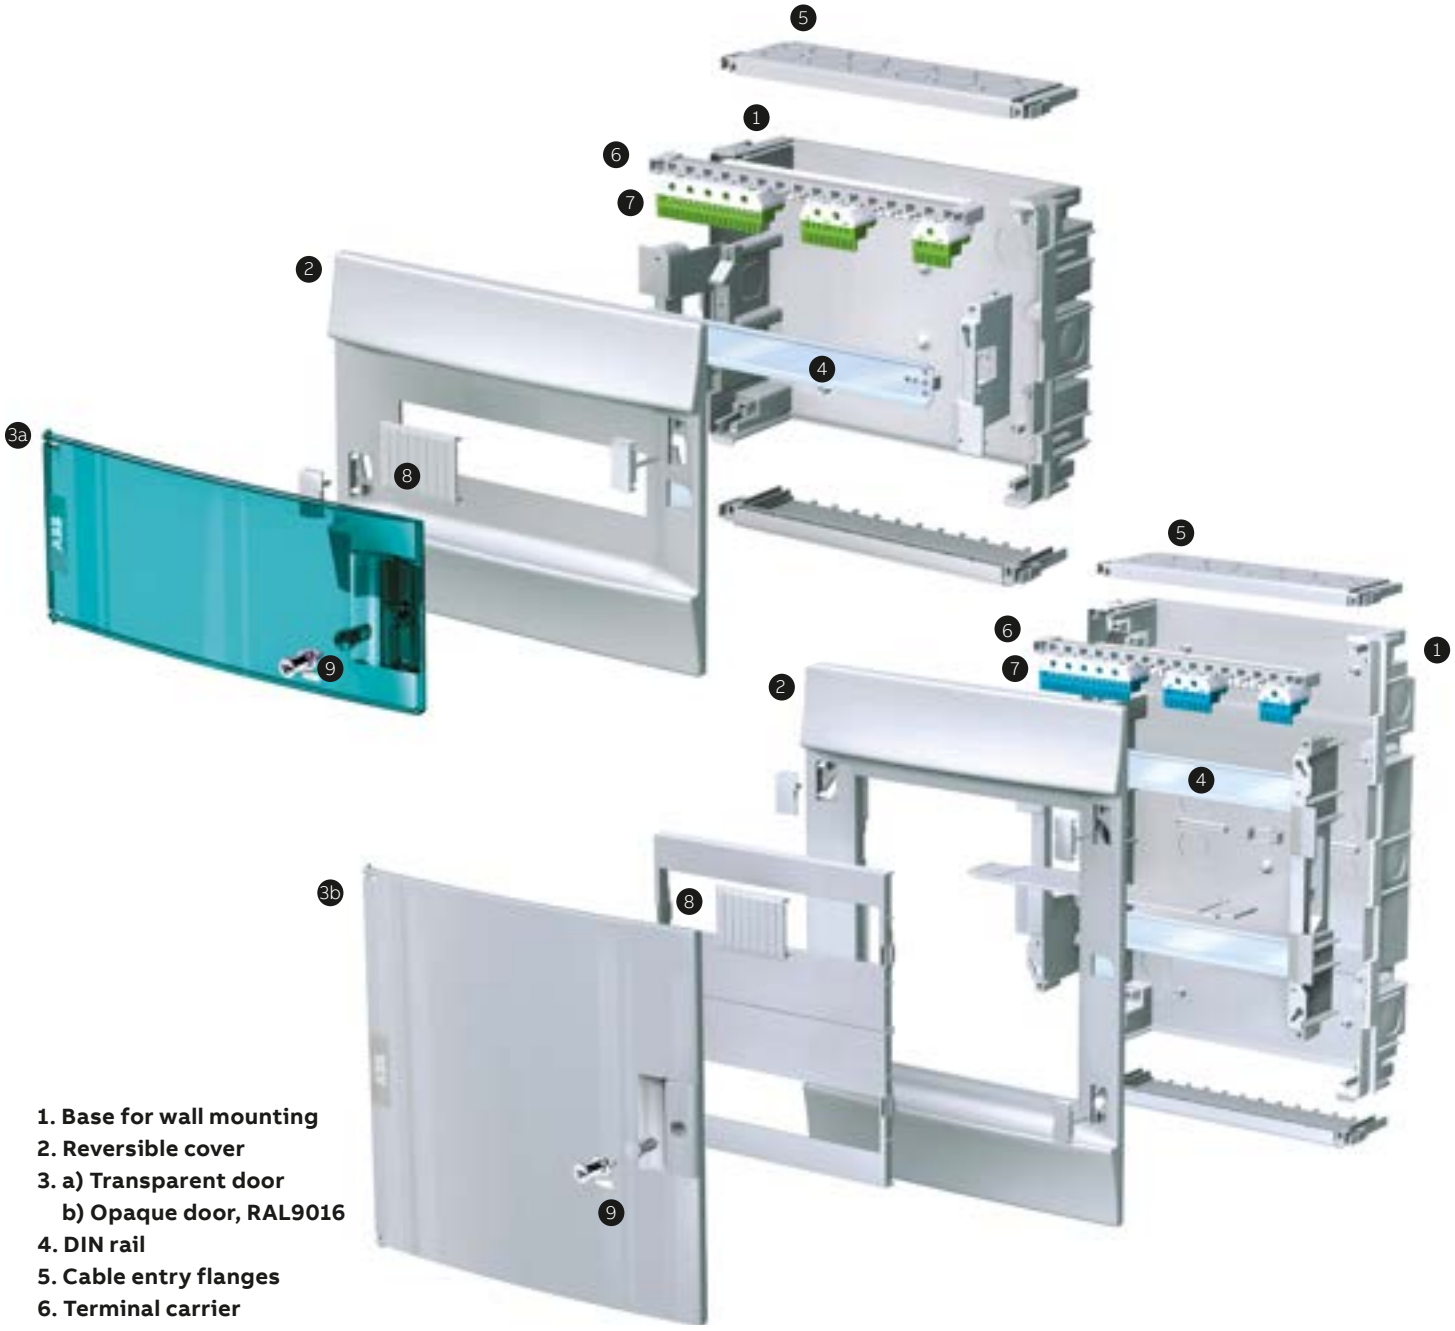

1. Base for wall mounting
2. Reversible cover
3. a) Transparent door
b) Opaque door, RAL9016
4. DIN rail
5. Cable entry flanges
6. Terminal carrier
7. Quick coupling terminal blocks
8. Module cover
9. Finish or closure element (optional lock)

A versatile range suitable for every application

Horiziontal levelling
The external adjustments of the front cover assure a perfect horizontal levelling even if the consumer unit is slightly crooked.

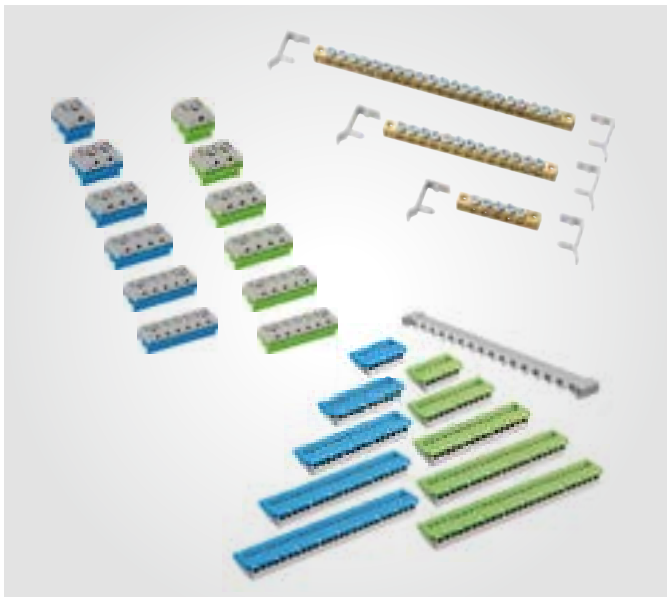

3 different terminal systems available
The MISTRAL range of consumer units is supplied with a wide range of terminal systems: Terminal bars with screws and the two versions of terminal blocks offering screw or screwless couplings.

Hollow wall mounting
For the hollow wall mounting our consumer units provide a special enclosure and hollow mounting screws.

Fast and tidy cabling
Both versions of terminal blocks can be installed on the terminal carriers on the upper and lower part of the unit. They are available in the colors green and blue.

Consumer units

MISTRAL41F – Order codes | Flush-mounted – Brick wall

4 modules

6 modules

8 modules

12 modules

18 modules

24 modules

36 modules

MISTRAL41F – Order codes 650

Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Packaging	Order details	
					Type code	Order code
Consumer units MISTRAL41 flush 650 - 1 Row						
Opaque door 4M	4	650	152 x 202 x 105	1/24	41A04X11	1SLM004100A1100
Transparent door 4M	4	650	152 x 202 x 105	1/24	41A04X12	1SLM004100A1200
Front transparent door 4M	4	650	152 x 202 x 25	1/24	41F04X12	1SLM004100A1600
Flush-mounting box 4M	4	650	129 x 182 x 80	1/24	41S04X1	1SLM004100A1700
Opaque door 6M	6	650	192 x 202 x 105	1/18	41A06X11	1SLM004100A1101
Transparent door 6M	6	650	192 x 202 x 105	1/18	41A06X12	1SLM004100A1201
Front transparent door 6M	6	650	192 x 202 x 25	1/18	41F06X12	1SLM004100A1601
Flush-mounting box 6M	6	650	149 x 182 x 80	1/18	41S06X1	1SLM004100A1701
Opaque door 8M	8	650	232 x 250 x 108	1/12	41A08X11	1SLM004100A1102
Transparent door 8M	8	650	232 x 250 x 108	1/12	41A08X12	1SLM004100A1202
Front opaque door 8M	8	650	232 x 250 x 28	1/12	41F08x11	1SLM004100A1502
Front transparent door 8M	8	650	232 x 250 x 28	1/12	41F08X12	1SLM004100A1602
Flush-mounting box 8M	8	650	206 x 230 x 80	1/12	41S08X1	1SLM004100A1702
Opaque door 12M	12	650	320 x 250 x 108	1/9	41A12X11	1SLM004100A1103
Transparent door 12M	12	650	320 x 250 x 108	1/9	41A12X12	1SLM004100A1203
Front opaque door 12M	12	650	320 x 250 x 28	1/9	41F12x11	1SLM004100A1503
Front transparent door 12M	12	650	320 x 250 x 28	1/9	41F12X12	1SLM004100A1603
Flush-mounting box 12M	12	650	294 x 230 x 80	1/9	41S12X1	1SLM004100A1703
Opaque door 18M	18	650	430 x 250 x 108	1/6	41A18X11	1SLM004100A1104
Transparent door 18M	18	650	430 x 250 x 108	1/6	41A18X12	1SLM004100A1204
Front transparent door 18M	18	650	430 x 250 x 28	1/6	41F18X12	1SLM004100A1604
Flush-mounting box 18M	18	650	404 x 230 x 80	1/6	41S18X1	1SLM004100A1704
Consumer units MISTRAL41 flush 650 - 2 Rows						
Opaque door 24M	24	650	320 x 435 x 108	1/5	41A12X21	1SLM004100A1105
Transparent door 24M	24	650	320 x 435 x 108	1/5	41A12X22	1SLM004100A1205
Front opaque door 24M	24	650	320 x 435 x 28	1/5	41F12x21	1SLM004100A1505
Front transparent door 24M	24	650	320 x 435 x 28	1/5	41F12X22	1SLM004100A1605
Flush-mounting box 24M	24	650	294 x 415 x 80	1/5	41S12X2	1SLM004100A1705
Opaque door 36M 2F	36	650	430 x 435 x 108	1/3	41A18X21	1SLM004100A1106
Transparent door 36M 2F	36	650	430 x 435 x 108	1/3	41A18X22	1SLM004100A1206

Consumer units

MISTRAL41F – Order codes | Flush-mounted – Brick wall

36 modules

54 modules

48 modules

72 modules

MISTRAL41F – Order codes 650

Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Packaging	Order details	
					Type code	Order code
Consumer units MISTRAL41 flush 650 - 3 Rows						
Opaque door 36M 3F	36	650	320 x 600 x 108	1/4	41A12X31	1SLM004100A1107
Transparent door 36M 3F	36	650	320 x 600 x 108	1/4	41A12X32	1SLM004100A1207
Front opaque door 36M 3F	36	650	320 x 600 x 28	1/4	41F12x31	1SLM004100A1507
Front transparent door 36M3F	36	650	320 x 600 x 28	1/4	41F12x32	1SLM004100A1607
Flush-mounting box 36M 3F	36	650	294 x 580 x 80	1/4	41S12x31	1SLM004100A1707
Opaque door 54M	54	650	430 x 600 x 128	1/1	41A18X31	1SLM004100A1109
Transparent door 54M	54	650	430 x 600 x 128	1/1	41A18X32	1SLM004100A1209
Consumer units MISTRAL41 flush 650 - 4 Rows						
Opaque door 48M	48	650	320 x 735 x 108	1/4	41A12X41	1SLM004100A1108
Transparent door 48M	48	650	320 x 735 x 108	1/4	41A12X42	1SLM004100A1208
Opaque door 72M	72	650	430 x 735 x 128	1/1	41A18X41	1SLM004100A1110
Transparent door 72M	72	650	430 x 735 x 128	1/1	41A18X42	1SLM004100A1210

All units on this page will be delivered without connection terminals

Consumer units

MISTRAL41F – Order codes | Flush-mounted – Hollow wall

12 modules

18 modules

24 modules

36 modules

36 modules

54 modules

48 modules

72 modules

MISTRAL41F – Order codes 850*

Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Packaging	Order details	
					Type code	Order code
Opaque door 12M	12	850	320 x 250 x 108	1/9	41C12X11	1SLM004100A1303
Transparent door 12M	12	850	320 x 250 x 108	1/9	41C12X12	1SLM004100A1403
Opaque door 18M	18	850	430 x 250 x 108	1/6	41C18X11	1SLM004100A1304
Transparent door 18M	18	850	430 x 250 x 108	1/6	41C18X12	1SLM004100A1404
Consumer units MISTRAL41 flush 850 - 2 Rows						
Opaque door 24M	24	850	320 x 435 x 108	1/5	41C12X21	1SLM004100A1305
Transparent door 24M	24	850	320 x 435 x 108	1/5	41C12X22	1SLM004100A1405
Opaque door 36M 2F	36	850	430 x 435 x 108	1/3	41C18X21	1SLM004100A1306
Transparent door 36M 2F	36	850	430 x 435 x 108	1/3	41C18X22	1SLM004100A1406

* hollow wall kit 41Z142 in scope of delivery

Consumer units MISTRAL41 flush 850 - 3 Rows						
Opaque door 36M 3F	36	850	320 x 600 x 108	1/4	41C12X31	1SLM004100A1307
Transparent door 36M 3F	36	850	320 x 600 x 108	1/4	41C12X32	1SLM004100A1407
Opaque door 54M	54	850	430 x 600 x 128	1/1	41C18X31	1SLM004100A1309
Transparent door 54M	54	850	430 x 600 x 128	1/1	41C18X32	1SLM004100A1409
Consumer units MISTRAL41 flush 850 - 4 Rows						
Opaque door 48M	48	850	320 x 735 x 108	1/1	41C12X41	1SLM004100A1308
Transparent door 48M	48	850	320 x 735 x 108	1/1	41C12X42	1SLM004100A1408
Opaque door 72M	72	850	430 x 735 x 128	1/1	41C18X41	1SLM004100A1310
Transparent door 72M	72	850	430 x 735 x 128	1/1	41C18X42	1SLM004100A1410

* hollow wall kit 41Z142 in scope of delivery

All units on this page will be delivered without connection terminals

Consumer units

MISTRAL41F – Order codes with terminals | Flush-mounted – Brick wall

8 modules

12 modules

18 modules

24 modules

36 modules

36 modules

MISTRAL41F – Order codes 650

Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Packaging	Order details	
					Type code	Order code
MISTRAL41 flush						
Opaque door 8M 12SM	8	650	232 x 250 x 108	1/12	41A08X11A	1SLM004102A1102
Transparent door 8M 12SM	8	650	232 x 250 x 108	1/12	41A08X12A	1SLM004101A1202
N 3x6mm² + 3x16mm² PE 3x6mm² + 3x16mm²						
Opaque door 12M 12SM	12	650	320 x 250 x 108	1/9	41A12X11A	1SLM004102A1103
Transparent door 12M 12SM	12	650	320 x 250 x 108	1/9	41A12X12A	1SLM004101A1203
N 3x6mm² + 3x16mm² PE 3x6mm² + 3x16mm²						
Opaque door 18M 22SM	18	650	430 x 250 x 108	1/16	41A18X11A	1SLM004102A1104
Transparent door 18M 22SM	18	650	430 x 250 x 108	1/16	41A18X12A	1SLM004101A1204
N 6x6mm² + 5x16mm² PE 6x6mm² + 5x16mm²						
Opaque door 24M 32SM	24	650	320 x 435 x 108	1/5	41A12X21A	1SLM004102A1105
Transparent door 24M 32SM	24	650	320 x 435 x 108	1/5	41A12X22A	1SLM004101A1205
N 9x6mm² + 7x16mm² PE 9x6mm² + 7x16mm²						
Opaque door 36M 2F 42SM	36	650	430 x 435 x 108	1/3	41A18X21A	1SLM004102A1106
Transparent door 36M 2F 42SM	36	650	430 x 435 x 108	1/3	41A18X22A	1SLM004101A1206
N 12x6mm² + 9x16mm² PE 12x6mm² + 9x16mm²						
Opaque door 36M 3F 44SM	36	650	320 x 600 x 108	1/4	41A12X31A	1SLM004102A1107
Transparent door 36M 3F 44SM	36	650	320 x 600 x 108	1/4	41A12X32A	1SLM004101A1207
N 2 pcs. 6x6mm² + 5x16mm² PE 2 pcs. 6x6mm² + 5x16mm²						

Consumer units

MISTRAL41F – Order codes with terminals | Flush-mounted – Brick wall

54 modules

MISTRAL41F – Order codes 650

Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Packaging	Order details	
					Type code	Order code
MISTRAL41 flush						
Opaque door 54M 64SM	54	650	430 x 600 x 128	1/1	41A18X31A	1SLM004102A1109
Transparent door 54M 64SM	54	650	430 x 600 x 128	1/1	41A18X32A	1SLM004101A1209
N 2 pcs. 9x6mm² + 7x16mm² PE 2 pcs. 9x6mm² +7x16mm²						

48 modules

Opaque door 48M 64SM	48	650	320 x 735 x 108	1/1	41A12X41A	1SLM004102A1108
Transparent door 48M 64SM	48	650	320 x 735 x 108	1/1	41A12X42A	1SLM004101A1208
N 2 pcs. 9x6mm² + 7x16mm² PE 2 pcs. 9x6mm² + 7x16mm²						

72 modules



Opaque door 72M 84SM	72	650	430 x 735 x 128	1/1	41A18X41A	1SLM004102A1110
Transparent door 72M 84SM	72	650	430 x 735 x 128	1/1	41A18X42A	1SLM004101A1210
N 2 pcs. 12x6mm² + 9x16mm² PE 2 pcs. 12x6mm² + 9x16mm²						

Consumer units

MISTRAL41F – accessories

MISTRAL41F – Accessories doors

Description	N° of modules [18 mm]	Packaging	Order details	
			Type code	Order code
Opaque door				
Opaque door 4M MISTRAL41F	4	1/20	41Z83	1SLM004100A1900
Opaque door 6M MISTRAL41F	6	1/20	41Z84	1SLM004100A1916
Opaque door 8M MISTRAL41F	8	1/10	41Z85	1SLM004100A1902
Opaque door 12M MISTRAL41F	12	1/20	41Z86	1SLM004100A1904
Opaque door 18M MISTRAL41F	18	1/20	41Z87	1SLM004100A1906
Opaque door 24M / 48M MISTRAL41F	24	1/15	41Z88	1SLM004100A1908
Opaque door 36M 3F MISTRAL41F	36	1/10	41Z89	1SLM004100A1910
Opaque door 36M 2F / 72M MISTRAL41F	36	1/10	41Z90	1SLM004100A1912
Opaque door 54M MISTRAL41F	54	1/5	41Z91	1SLM004100A1914
Transparent door				
Transparent door 4M MISTRAL41F	4	1/20	41Z92	1SLM004100A1901
Transparent door 6M MISTRAL41F	6	1/20	41Z93	1SLM004100A1917
Transparent door 8M MISTRAL41F	8	1/10	41Z94	1SLM004100A1903
Transparent door 12M MISTRAL41F	12	1/20	41Z95	1SLM004100A1905
Transparent door 18M MISTRAL41F	18	1/20	41Z96	1SLM004100A1907
Transparent door 24M / 48M MISTRAL41F	24	1/15	41Z97	1SLM004100A1909
Transparent door 36M 3F MISTRAL41F	36	1/10	41Z98	1SLM004100A1911
Transparent door 36M 2F / 72M MISTRAL41F	36	1/10	41Z99	1SLM004100A1913
Transparent door 54M MISTRAL41F	54	1/5	41Z100	1SLM004100A1915

Consumer units

MISTRAL41F – accessories

41Z01, 41Z02

41Z03, 41Z04

41Z05

41Z06

41Z07, 41Z08, 41Z09, 41Z10

41Z12

41Z13

ZA8P5

MISTRAL41F – Other accessories

Description	N° of modules [18 mm]	Packaging	Order details	
			Type code	Order code
Other accessories				
Horizontal partition 12M MISTRAL41F	12	1/100	41Z01	1SLM004100A1920
Horizontal partition 18M MISTRAL41F	18	1/100	41Z02	1SLM004100A1921
Vertical coupling / tubes holder 12M	12	1/20	41Z03	1SLM004100A1922
Vertical coupling / tubes holder 18M	18	1/15	41Z04	1SLM004100A1923
Module blanking cover 12M RAL9016	12	5/180	41Z05	1SPE007715F5650
Lock with key MISTRAL41 F		20/300	41Z06	1SLM004100A1931
Central blind panel 12M MISTRAL41F	12	1/20	41Z07	1SLM004100A1945
Blind panel 12M MISTRAL41F	12	1/20	41Z08	1SLM004100A1946
Central blind panel 18M MISTRAL41F	18	1/30	41Z09	1SLM004100A1947
Blind panel 18M MISTRAL41F	18	1/30	41Z10	1SLM004100A1948
Wires holder comb	12	1/30	41Z12	1SLM004100A1942
Spirit level		1/30	41Z13	
Label holder 12M	12	5	ZA8P5	2CPX062598R9999
Label holder running meter		1m	ZA10	2CPX038241R9999

Notes

MISTRAL41W
Wall-mounted series

The MISTRAL41W series of consumer units gives installers the freedom and flexibility to implement any type of electrical distribution system in residential buildings. This wide range of wall-mounted, IP41-rated units has been designed from scratch to enhance the unique features that make ABB the leading industry standard.

The units are fast and easy to install and look great anywhere thanks to their elegant design. Furthermore, ample internal space, a choice of doors and a unified range of accessories offer endless possibilities to create high-quality work installers can be proud of.

Fast and easy to be installed. Design and simplicity “all in one”.

Multimedia version for integration of internet routers, antenna or voice splitters.

Door available in two versions: petrol blue and opaque. Units without doors are also available.

Door opens up to 180° allowing full access to theinterior of the unit.

Concealed rear mounts for secure wall installation.

The symmetrical design allows opening of the reversible door either from the left or from the right.

Endless installation possibilities

Invisible cable entry and exit
Pre-cut knockout slots allow cable entry and exit from the top and bottom. When not used, the slots remain invisible on the outside maintaining the consumer unit's sleek look and feel.

More than enough internal space
Lots of internal space makes cabling even easier. Cable clips and holes allow wires to be fastened to the frame with simple cable ties.

Easy installation of extra modules
An extra module can be added by removing two pre-cut elements. This offers a quick and easy solution when unexpected additional installation is required.

Terminal blocks – screwless version
Time-saving installation thanks to the snap-on system of the screwless terminal blocks which can simply be plugged into the terminal carriers.

Endless installation possibilities

Double insulation protection
The unit housing and all accessories have been designed and developed to ensure Class II double insulation protection.

Multi-row units
Multi-row units are available with a standard distance of 125 mm between DIN rails.

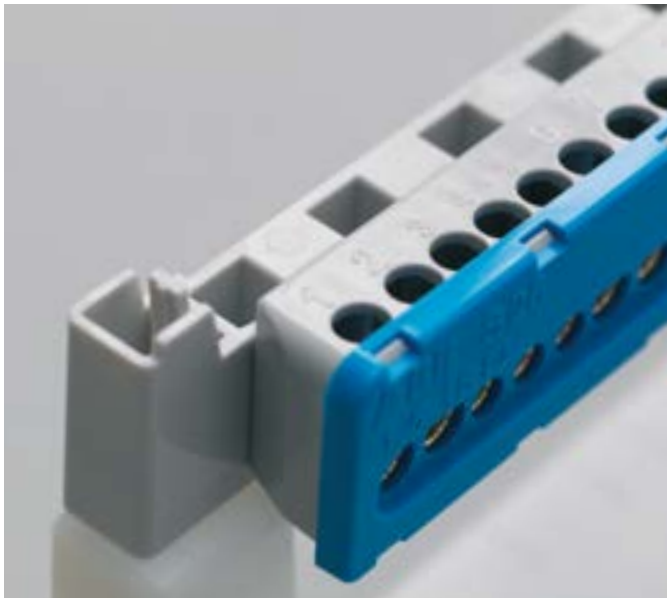

Terminal blocks – screw version
Within the flexible modular concept the new terminal blocks both screw and screwless versions ensure easy and effective cabling up to 63A or 100A.

Optional door lock
The standard door with ergonomic handle is available with a lock for additional security.

A versatile range suitable for every application

The simple construction of the MISTRAL41W series makes the units fast and easy to assemble. Furthermore, they can be easily adapted to various application requirements thanks to their flexible design.

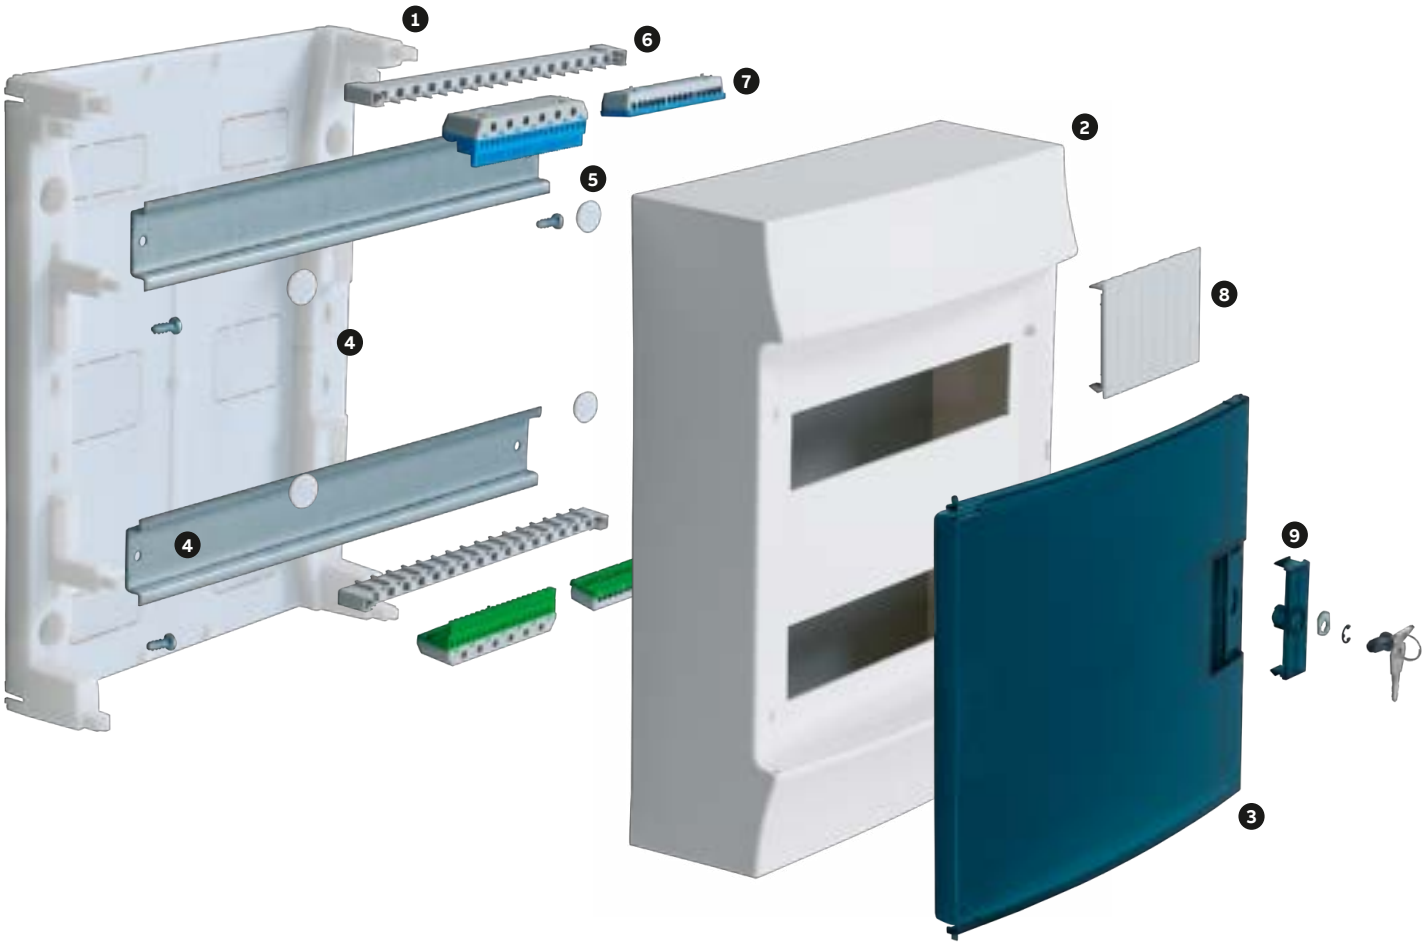

1. Base for wall mounting
2. Reversible cover
3. Transparent door
4. DIN rail
5. Plugs, protection class II
6. Terminal carrier
7. Quick coupling terminal blocks
8. Module cover
9. Finish or closure element (optional lock)

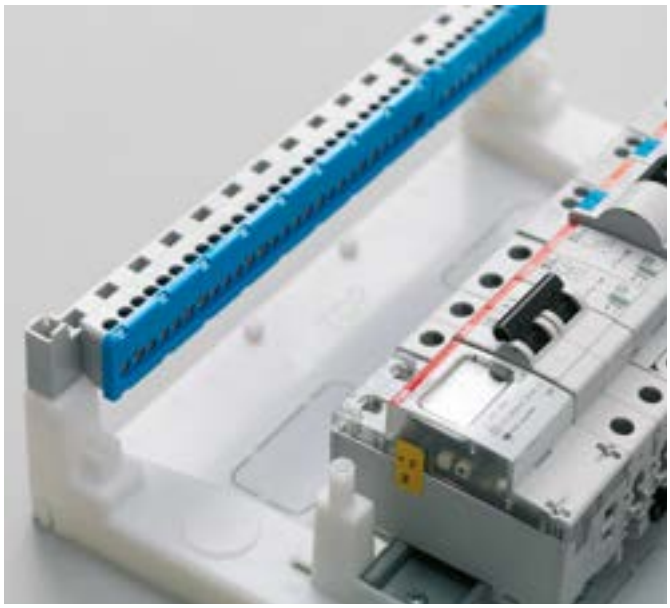

A unified range of products
The MISTRAL41W series is compatible with a unified range of ABB products. As a result, terminal blocks, circuit breakers, switches, surge protective devices and many other components can all be installed in the units for a wide variety of applications.

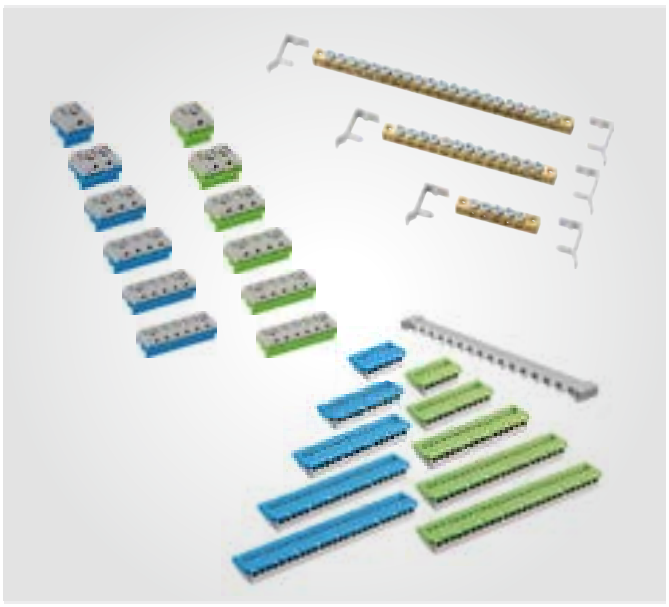

3 different terminal systems available
Choose from a range of terminal bars or two versions of terminal blocks for precise configurations responding to individual requirements thanks to the flexible modular concept.

You can find all additional information, technical details and service offers on the ABB website whenever you need them. If you miss some information or need additional support you can also contact your local ABB retailer or ABB sales representative. They would be happy to assist you.

Consumer units

MISTRAL41W – Order codes wall-mounted (650)

2 modules



4 modules



8 modules



12 modules

18 modules

24 modules



36 modules

MISTRAL41W – Order codes 650

Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Packaging	Order details	
					Type code	Order code
Consumer units MISTRAL41 wall - 1 Row						
Without door 2M	2	650	64 x 223 x 95	1/36	41P02X10	1SPE007717F0100
Without door 4M	4	650	100 x 223 x 95	1/24	41P04X10	1SPE007717F0200
Opaque door 4M	4	650	100 x 223 x 96	1/24	41P04X11	1SPE007717F0210
Transparent door 4M	4	650	100 x 223 x 96	1/24	41P04X12	1SPE007717F0220
Without door 8M	8	650	207 x 262 x 118	1/7	41P08X10	1SPE007717F0300
Opaque door 8M	8	650	207 x 262 x 119	1/7	41P08X11	1SPE007717F0310
Transparent door 8M	8	650	207 x 262 x 119	1/7	41P08X12	1SPE007717F0320
Without door 12M	12	650	297 x 262 x 118	1/3	41P12X10	1SPE007717F0400
Opaque door 12M	12	650	297 x 262 x 119	1/3	41P12X11	1SPE007717F0410
Transparent door 12M	12	650	297 x 262 x 119	1/3	41P12X12	1SPE007717F0420
Without door 18M	18	650	387 x 262 x 118	1/3	41P18X10	1SPE007717F0800
Opaque door 18M	18	650	387 x 262 x 119	1/3	41P18X11	1SPE007717F0810
Transparent door 18M	18	650	387 x 262 x 119	1/3	41P18X12	1SPE007717F0820
Consumer units MISTRAL41 wall - 2 Rows						
Without door 24M	24	650	297 x 387 x 118	1/2	41P12X20	1SPE007717F0500
Opaque door 24M	24	650	297 x 387 x 119	1/2	41P12X21	1SPE007717F0510
Transparent door 24M	24	650	297 x 387 x 119	1/2	41P12X22	1SPE007717F0520
Without door 36M 2F	36	650	387 x 387 x 118	1/2	41P18X20	1SPE007717F0900
Opaque door 36M 2F	36	650	387 x 387 x 119	1/2	41P18X21	1SPE007717F0910
Transparent door 36M 2F	36	650	387 x 387 x 119	1/2	41P18X22	1SPE007717F0920

Consumer units

MISTRAL41W – Order codes wall-mounted (650)

36 modules



54 modules

48 modules

72 modules

MISTRAL41W – Order codes 650

Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Packaging	Order details	
					Type code	Order code
Consumer units MISTRAL41 wall - 3 Rows						
Without door 36M 3F	36	650	297 x 512 x 118	1/2	41P12X30	1SPE007717F0600
Opaque door 36M 3F	36	650	297 x 512 x 119	1/2	41P12X31	1SPE007717F0610
Transparent door 36M 3F	36	650	297 x 512 x 119	1/2	41P12X32	1SPE007717F0620
Without door 54M	54	650	387 x 512 x 118	1/2	41P18X30	1SPE007717F1000
Opaque door 54M	54	650	387 x 512 x 119	1/2	41P18X31	1SPE007717F1010
Transparent door 54M	54	650	387 x 512 x 119	1/2	41P18X32	1SPE007717F1020
Consumer units MISTRAL41 wall - 4 Rows						
Without door 48M	48	650	297 x 659 x 118	1/1	41P12X40	1SPE007717F0700
Opaque door 48M	48	650	297 x 659 x 119	1/1	41P12X41	1SPE007717F0710
Transparent door 48M	48	650	297 x 659 x 119	1/1	41P12X42	1SPE007717F0720
Without door 72M	72	650	387 x 659 x 118	1/1	41P18X40	1SPE007717F1100
Opaque door 72M	72	650	387 x 659 x 119	1/1	41P18X41	1SPE007717F1110
Transparent door 72M	72	650	387 x 659 x 119	1/1	41P18X42	1SPE007717F1120

All units on this page will be delivered without connection terminals

Consumer units

MISTRAL41W – Order codes wall-mounted (750)

2 modules

4 modules

8 modules

12 modules

18 modules

24 modules

36 modules

MISTRAL41W – Order codes 750

Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Packaging	Order details	
					Type code	Order code
Consumer units MISTRAL41 wall - 1 Row						
Without door* 2M	2	750	64 x 223 x 95	1/36	41P02X100750	1SPE007717F1500
Without door* 4M	4	750	100 x 223 x 95	1/24	41P04X100750	1SPE007717F1600
Without door* 8M	8	750	207 x 262 x 118	1/7	41P08X100750	1SPE007717F1700
Without door* 12M	12	750	297 x 262 x 118	1/3	41P12X100750	1SPE007717F1800
Without door* 18M	18	750	387 x 262 x 118	1/3	41P12X200750	1SPE007717F2200
Consumer units MISTRAL41 wall - 2 Rows						
Without door* 24M	24	750	297 x 387 x 118	1/2	41P12X300750	1SPE007717F1900
Without door* 36M 2F	36	750	387 x 387 x 118	1/2	41P12X400750	1SPE007717F2300

* Doors can be ordered separately

Consumer units

MISTRAL41W – Order codes wall-mounted (750)

36 modules

54 modules

48 modules

72 modules

MISTRAL41W – Order codes 750

Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Packaging	Order details	
					Type code	Order code
Consumer units MISTRAL41 wall - 3 Rows						
Without door 36M* 3F	36	750	297 x 512 x 118	1/2	41P18X100750	1SPE007717F2000
Without door 54M*	54	750	387 x 512 x 118	1/2	41P18X300750	1SPE007717F2400
Consumer units MISTRAL41 wall - 4 Rows						
Without door 48M*	48	750	297 x 659 x 118	1/1	41P18X200750	1SPE007717F2100
Without door 72M*	72	750	387 x 659 x 118	1/1	41P18X400750	1SPE007717F2500

* Doors can be ordered separately

All units on this page will be delivered without connection terminals

Consumer units

MISTRAL41W – Order codes with terminals (650)

MISTRAL41W – Order codes

Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Packaging	Order details	
					Type code	Order code
Consumer units MISTRAL41W						
Opaque door 8M 12SM	8	650	207 x 262 x 119	1/7	41P08X11A	1SLM004102A3102
Transparent door 8M 12SM	8	650	207 x 262 x 119	1/7	41P08X12A	1SPE007717F0321
N 3x6mm² + 3x16mm² PE 3x6mm² + 3x16mm²						
Opaque door 12M 12SM	12	650	297 x 262 x 119	1/3	41P12X11A	1SLM004102A3103
Transparent door 12M 12SM	12	650	297 x 262 x 119	1/3	41P12X12A	1SPE007717F0421
N 3x6mm² + 3x16mm² PE 3x6mm² + 3x16mm²						
Opaque door 18M 22SM	18	650	387 x 262 x 119	1/3	41P12X21A	1SLM004102A3104
Transparent door 18M 22SM	18	650	387 x 262 x 119	1/3	41P12X22A	1SPE007717F0821
N 6x6mm² + 5x16mm² PE 6x6mm² + 5x16mm²						
Opaque door 24M 32SM	24	650	297 x 387 x 119	1/2	41P12X31A	1SLM004102A3105
Transparent door 24M 32SM	24	650	297 x 387 x 119	1/2	41P12X32A	1SPE007717F0521
N 9x6mm² + 7x16mm² PE 9x6mm² + 7x16mm²						
Opaque door 36M 2F 42SM	36	650	387 x 387 x 119	1/2	41P12X41A	1SLM004102A3106
Transparent door 36M 2F 42SM	36	650	387 x 387 x 119	1/2	41P12X42A	1SPE007717F0921
N 12x6mm² + 9x16mm² PE 12x6mm² + 9x16mm²						
Opaque door 36M 3F 44SM	36	650	297 x 512 x 119	1/2	41P18X11A	1SLM004102A3107
Transparent door 36M 3F 44SM	36	650	297 x 512 x 119	1/2	41P18X12A	1SPE007717F0621
N 2 pcs. 6x6mm² + 5x16mm² PE 2 pcs. 6x6mm² + 5x16mm²						



8 modules



12 modules

18 modules

24 modules



36 modules





36 modules

Consumer units

MISTRAL41W – Order codes with terminals (650)

MISTRAL41W – Order codes



54 modules



48 modules

72 modules



Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Packaging	Order details	
					Type code	Order code
Consumer units MISTRAL41W						
Opaque door 54M 64SM	54	650	387 x 512 x 119	1/2	41P18X31A	1SLM004102A3109
Transparent door 54M 64SM	54	650	387 x 512 x 119	1/2	41P18X32A	1SPE007717F1021
N 2 pcs. 9x6mm² + 7x16mm² PE 2 pcs. 9x6mm² +7x16mm²						
Opaque door 48M 64SM	48	650	297 x 659 x 119	1/1	41P18X21A	1SLM004102A3108
Transparent door 48M 64SM	48	650	297 x 659 x 119	1/1	41P18X22A	1SPE007717F0721
N 2 pcs. 9x6mm² + 7x16mm² PE 2 pcs. 9x6mm² + 7x16mm²						
Opaque door 72M 84SM	72	650	387 x 659 x 119	1/1	41P18X41A	1SLM004102A3110
Transparent door 72M 84SM	72	650	387 x 659 x 119	1/1	41P18X42A	1SPE007717F1121
N 2 pcs. 12x6mm² + 9x16mm² PE 2 pcs. 12x6mm² + 9x16mm²						

Consumer units

MISTRAL41W – Order codes accessories

MISTRAL41W – Accessories doors

Description	N° of modules [18 mm]	Packaging	Order details	
			Type code	Order code
Opaque door (650)				
Opaque door 4M MISTRAL41W	4	1/24	41Z33	1SPE007717F9900
Opaque door 8M MISTRAL41W	8	1/14	41Z34	1SPE007717F9901
Opaque door 12M MISTRAL41W	12	1/14	41Z35	1SPE007717F9902
Opaque door 24/48M MISTRAL41W	24/48	1/15	41Z36	1SPE007717F9903
Opaque door 36M (3 rows) MISTRAL41W	36	1/18	41Z37	1SPE007717F9904
Opaque door 18M MISTRAL41W	18	1/14	41Z38	1SPE007717F9905
Opaque door 36/72M (2 rows) MISTRAL41W	36/72	1/18	41Z39	1SPE007717F9906
Opaque door 54M MISTRAL41W	54	1/18	41Z40	1SPE007717F9907
Opaque door (750)				
Opaque door 4M 750 MISTRAL41W	4	1/24	41Z49	1SPE007717F9924
Opaque door 8M 750 MISTRAL41W	8	1/14	41Z50	1SPE007717F9925
Opaque door 12M 750 MISTRAL41W	12	1/14	41Z51	1SPE007717F9926
Opaque door 24/48M 750 MISTRAL41W	24/48	1/15	41Z52	1SPE007717F9927
Opaque door 36M (3 rows) 750 MISTRAL41W	36	1/18	41Z53	1SPE007717F9928
Opaque door 18M 750 MISTRAL41W	18	1/14	41Z54	1SPE007717F9929
Opaque door 36/72M (2 rows) 750 MISTRAL41W	36/72	1/18	41Z55	1SPE007717F9930
Opaque door 54M 750 MISTRAL41W	54	1/18	41Z56	1SPE007717F9931
Transparent door (650/750)				
Transparent door blue 4M MISTRAL41W	4	1/24	41Z41	1SPE007717F9908
Transparent door blue 8M MISTRAL41W	8	1/14	41Z42	1SPE007717F9909
Transparent door blue 12M MISTRAL41W	12	1/14	41Z43	1SPE007717F9910
Transparent door blue 24/48M MISTRAL41W	24/48	1/15	41Z44	1SPE007717F9911
Transparent door blue 36M (3 rows) MISTRAL41W	36	1/18	41Z45	1SPE007717F9912
Transparent door blue 18M MISTRAL41W	18	1/14	41Z46	1SPE007717F9913
Transparent door blue 36/72M (2 rows) MISTRAL41W	36/72	1/18	41Z47	1SPE007717F9914
Transparent door blue 54M MISTRAL41W	54	1/18	41Z48	1SPE007717F9915

Consumer units

MISTRAL41W – Order codes accessories

41Z14, 41Z15, 41Z16

MISTRAL41W – Other accessories

Description	N° of modules [18 mm]	Packaging	Order details	
			Type code	Order code
Other accessories				
Lock set white LMW		1	41Z14	1SPE007715F5009
Lock set blue LMB		1	41Z16	1SPE007715F5010

41Z17, 41Z18

Flange for conduit derivation GWT 650		1/30	41Z17	1SLM004100A1951
Flange for conduit derivation GWT 750		1/30	41Z18	1SPE007715F5111

ZA8P5

Label holder 12M	12	5	ZA8P5	2CPX062598R9999
Label holder running meter		1m	ZA10	2CPX038241R9999

41Z21, 41Z22

Partition wall 12M	12	5	41Z21	1SPE007715F5112
Partition wall 18M	18	5	41Z22	1SPE007715F5118

41Z23, 41Z24

MCB cover 12M GWT 650	12	5/180	41Z23	1SPE007715F5650
MCB cover 12M GWT 750	12	5/180	41Z24	1SPE007715F5750

41Z118

coupling element M41W		100/3000	41Z118	1SLM004100A3910

41Z68

MISTRAL41 – Terminal block carriers

Carrier 8M	5/280	41Z67	1SPE007715F0751
Carrier 12M	5/225	41Z68	1SPE007715F0752
Carrier 18M	5/150	41Z69	1SPE007715F0753

Consumer units
Terminal blocks

ZKS11B

ZKS11G

SCREW – Terminal blocks

Article	Number terminals 1.5 x 6 mm²	Number terminals 1.5 x 16 mm²	maximum rated current [A]	Packaging pack/bulk	Order details Type code	Order details Order code
N screw-terminals For terminal carriers	3 x 6	3 x 16	100	5/270	41Z57	1SPE007715F0731
	6 x 6	5 x 16	100	5/150	41Z58	1SPE007715F0732
	9 x 6	7 x 16	100	5/120	41Z59	1SPE007715F0733
	12 x 6	9 x 16	100	5/90	41Z60	1SPE007715F0734
	15 x 6	11 x 16	100	5/90	41Z61	1SPE007715F0735
PE screw-terminals For terminal carriers	3 x 6	3 x 16	100	5/270	41Z62	1SPE007715F0741
	6 x 6	5 x 16	100	5/150	41Z63	1SPE007715F0742
	9 x 6	7 x 16	100	5/120	41Z64	1SPE007715F0743
	12 x 6	9 x 16	100	5/90	41Z65	1SPE007715F0744
	15 x 6	11 x 16	100	5/90	41Z66	1SPE007715F0745

ZK51B

ZK51G

QUICK PLUG – Terminal blocks screwless

N quick-plug terminals For terminal carriers	5 x 1.5 - 4	0 x 25	63	5/280	41Z70	1SPE007715F9701
	5 x 1.5 - 4	1 x 25	63	5/180	41Z71	1SPE007715F9702
	8 x 1.5 - 4	2 x 25	63	5/150	41Z72	1SPE007715F9703
	11 x 1.5 - 4	3 x 25	63	5/100	41Z73	1SPE007715F9704
	14 x 1.5 - 4	4 x 25	63	5/90	41Z74	1SPE007715F9705
	14 x 1.5 - 4	5 x 25	63	5/70	41Z75	1SPE007715F9706
	20 x 1.5 - 4	6 x 25	63	5/60	41Z76	1SPE007715F9707
N quick-plug terminals	5 x 1.5 - 4	0 x 25	63	1	ZK50BT	2CPX062745R9999
With adapter ZK15 for lateral assembling in the UK6... or for fastening to the DIN rail						
PE quick-plug terminals For terminal carriers	5 x 1.5 - 4	1 x 25	63	5/180	41Z77	1SPE007715F9712
	8 x 1.5 - 4	2 x 25	63	5/150	41Z78	1SPE007715F9713
	11 x 1.5 - 4	3 x 25	63	5/100	41Z79	1SPE007715F9714
	14 x 1.5 - 4	4 x 25	63	5/90	41Z80	1SPE007715F9715
	17 x 1.5 - 4	5 x 25	63	5/70	41Z81	1SPE007715F9716
	20 x 1.5 - 4	6 x 25	63	5/60	41Z82	1SPE007715F9717

ZK10P10

Quick terminals connection bridge For terminal carriers	10	ZK10P10	2CPX062763R9999

Consumer units

Terminal blocks

Terminal blocks

N/PE terminals with units	N screw-terminals	Type	Screw connection system		PE screw-terminals	Type	Screw connection system	
		ZKS6B 41Z57	3 x 6 mm²	3 x 16 mm²		ZKS6G 41Z62	3 x 6 mm²	3 x 16 mm²
		ZKS11B 41Z58	5 x 6 mm²	5 x 16 mm²		ZKS11G 41Z63	5 x 6 mm²	5 x 16 mm²
		ZKS16B 41Z59	9 x 6 mm²	7 x 16 mm²		ZKS11G 41Z63	9 x 6 mm²	7 x 16 mm²
		ZKS21B 41Z60	12 x 6 mm²	9 x 16 mm²		ZKS21G 41Z65	12 x 6 mm²	9 x 16 mm²
		ZKS26B 41Z61	15 x 6 mm²	11 x 16 mm²		ZKS26G 41Z66	15 x 6 mm²	11 x 16 mm²

Terminal blocks screwless

		ZK50B 41Z70 ZK50BT	0 x 25 mm²	5 x 1,5 - 4 mm²	-		-	-
		ZK51B 41Z71	1 x 25 mm²	5 x 1,5 - 4 mm²		ZK51G 41Z77	1 x 25 mm²	5 x 1,5 - 4 mm²
		ZK82B 41Z72	2 x 25 mm²	8 x 1,5 - 4 mm²		ZK82G 41Z78	2 x 25 mm²	8 x 1,5 - 4 mm²
		ZK113B 41Z73	3 x 25 mm²	11 x 1,5 - 4 mm²		ZK113G 41Z79	3 x 25 mm²	11 x 1,5 - 4 mm²
		ZK144B 41Z74	4 x 25 mm²	14 x 1,5 - 4 mm²		ZK144G 41Z80	4 x 25 mm²	14 x 1,5 - 4 mm²
		ZK175B 41Z75	5 x 25 mm²	17 x 1,5 - 4 mm²		ZK175G 41Z81	5 x 25 mm²	17 x 1,5 - 4 mm²
		ZK206B 41Z76	6 x 25 mm²	20 x 1,5 - 4 mm²		ZK206G 41Z82	6 x 25 mm²	20 x 1,5 - 4 mm²
		ZK237B 41Z150	7 x 25 mm²	23 x 1,5 - 4 mm²		ZK237G 41Z152	7 x 25 mm²	23 x 1,5 - 4 mm²
		ZK268B 41Z151	8 x 25 mm²	26 x 1,5 - 4 mm²		ZK268G 41Z153	8 x 25 mm²	26 x 1,5 - 4 mm²

Terminal block carriers

1SPE007715F0751



1SPE007715F0752



1SPE007715F0753



Consumer units

MISTRAL – Terminal bars



MISTRAL – Terminal bars

Description	Order details	
	Type code	Order code
Terminal bar 5 holes D.4.5 mm	41Z28	M125310000
Terminal bar 10 holes D.4.5 mm and 3 holes D.5.6 mm	41Z29	M125320000
Terminal bar 16 holes D.4.5 mm and 3 holes D.5.6 mm	41Z30	M125330000
Terminal bar 15 holes D.4.5 mm and 6 holes D.5.6 mm	41Z31	M125340000
Terminal bar 19 holes D.4.5 mm and 6 holes D.5.6 mm	41Z32	M125350000

MISTRAL – Terminal bar carriers

Description	Order details	
	Type code	Order code
Carrier for 8 moduls	41Z25	1SLM004100A1953
Carrier for 12 modules	41Z26	1SLM004100A1954
Carrier for 18 modules	41Z27	1SLM004100A1955

Consumer units

MISTRAL – Terminal bars assembly examples

Terminal bar carriers

1SLM004100A1955



1SLM004100A1954



1SLM004100A1953



Terminal bars

12531



12532



12533



12534



12535



Assembly examples

1SLM004100A1954

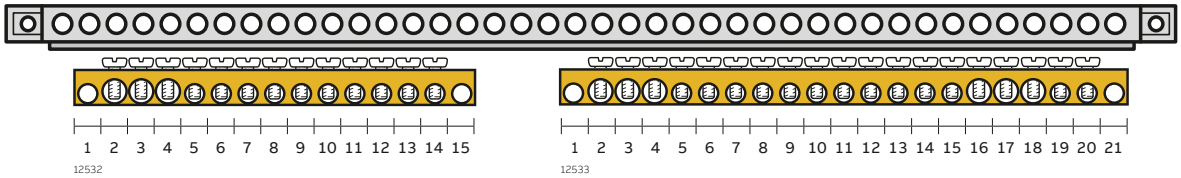

1SLM004100A1954

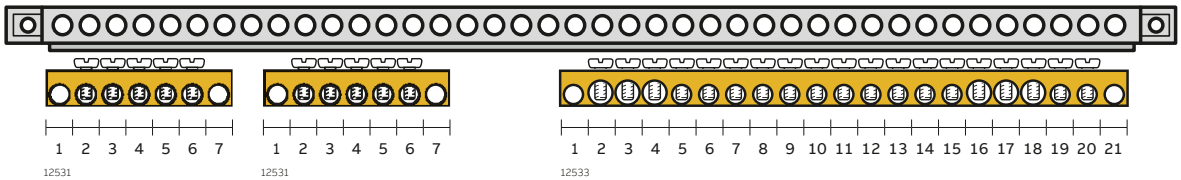

MISTRAL Multimedia
Easy installation for media equipment

Suitable for all kinds of walls
Available for brick walls, flush and hollow wall mounting, with drilled metal base plates always included.

MISTRAL family feeling
MISTRAL Multimedia as enriching addition to the product family.

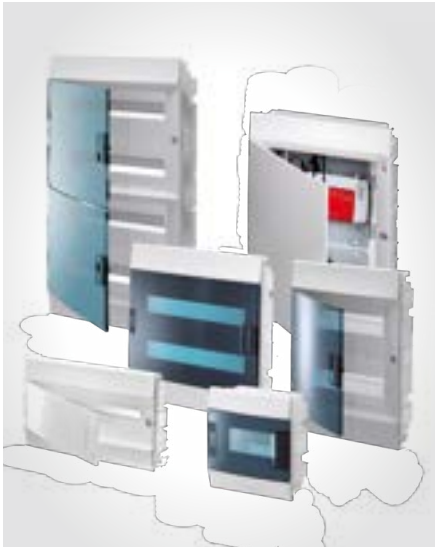

Neat cabling
The complete installation materials in one place.

Just snap the router on
The device carrier (rubber) makes it easy to assembly internet routers without any additional tools (snap on trap).

Easy connection to different power supplies
Triple socket, 120° rotatable and to fit all sorts of plugs.

Versatile connections
Patch-panels to host RJ45 keystone jacks.

Consumer units

Mistral41F and Mistral41W Multimedia

M41C24X210850

MISTRAL41F Multimedia – Flush mounted and hollow wall*

Description	Size	Dimensions W x H x D [mm]	Packaging	Order details	
				Type code	Order code
MISTRAL 41F Multimedia GWT 850 opaque door, with perforated mounting plates	3x12	320 x 600 x 107	1/4	M41C36X310850	1SLM004100A6307

41Z142

Hollow wall kit

Description	Size	Dimensions W x H x D [mm]	Packaging	Order details	
				Type code	Order code
Hollow wall fixing kit Mistral41 Multimedia			1	41Z142	1SLM004100A1961

M41P36X31

MISTRAL41W Multimedia – Wall mounted

Description	Size	Dimensions W x H x D [mm]	Packaging	Order details	
				Type code	Order code
MISTRAL 41W Multimedia GWT 650 opaque door, with perforated mounting plates	2x12	297 x 387 x 119	1/2	M41P24X21	1SLM004100A7105
	3x12	297 x 512 x 119	1/2	M41P36X31	1SLM004100A7107

* hollow wall kit not in scope of delivery

Consumer units

Media - accessories

41Z143

Perforated Plate

Description	Packaging	Order code	Type code
Drilled metal base plate 12-module size 41F*	1/10	41Z147	1SLM004100A3914
Drilled metal base plate 18-module size 41F*	1/10	41Z148	1SLM004100A3915
Drilled metal base plate 12-module size 41W*	1/10	41Z143	1SLM004100A3902
Drilled metal base plate 18-module size 41W*	1/10	41Z144	1SLM004100A3911

ZX287P10

Description	Packaging	Order code	Type code
10-screw kit for Multimedia metal plate	1	ZX287P10	2CPX061180R9999

ED44P10

Description	Packaging	Order code	Type code
Wire holder for Multimedia metal plate	1/5	41Z140	1SLM004100A1960

ZX340

Description	Packaging	Order code	Type code
Device strap elastic with 2 clips for assembly, e.g. to UZM61M	1	ZX340	2CPX031422R9999

Patchpanels

ZE336

Description	Packaging	Order code	Type code
Patchpanel 10-fold key stone (Mistral 12M)	1/15	41Z141	1SLM004100A3904
Patchpanel 16-fold key stone (Mistral 18M)	1/15	41Z123	1SLM004100A1957

Sockets and supports

ZE226

Description	Packaging	Order code	Type code
Triple socket 230 V AC voltage, 120° swiveling with EURO insert to be snapped on terminal carrier or DIN rail	1	ZE227	2CPX061211R9999

ZE225

Description	Packaging	Order code	Type code
Dual socket 230 V AC voltage for assembling to mounting support ZX29 with EURO insert	1	ZE225	2CPX061177R9999

ZX29

Description	Packaging	Order code	Type code
Mounting suport for dual socket For clamping on to terminal carrier or for assembling to the perforated sheet steel plate	1	ZX29	2CPX061178R9999

Consumer units

Media - accessories

ZE316

ZE317

ZE318

ZE319

key stone jacks for patch panels

Description	Packaging	Order code	Type code
COAX module - F/F connector	1	ZE316	2CPX039246R9999
COAX module - IEC connector	1	ZE317	2CPX039247R9999
COAX module - IEC plug	1	ZE318	2CPX039248R9999
OpDAT module - LC guide sleeve, ceramics	1	ZE319	2CPX039249R9999

ZE311

ZE312

RJ45 connector

Description	Packaging	Order code	Type code
plastic	1	ZE311	2CPX038612R9999
metal	1	ZE312	2CPX038613R9999

ZB120

Insulating tube - For communication line

Description	Packaging	Order code	Type code
50 mm	1	ZB120	2CPX071111R9999
150 mm	1	ZB122	2CPX071112R9999

MISTRAL65 / 65H

A versatile range suitable for every application

Efficiency, safety, integration: the new MISTRAL65 series rests on the strengths which have consolidated ABB's image over the years for its expertise and reliability in the area of products for protection, control, monitoring, measurement, safety and energy efficiency. These innovative IP65 rated consumer units complete ABB's wide product range for the residential, commercial and industrial sector.

The range includes solutions with transparent doors which open up to 180°, and a choice of between 4 and 72 modules, meeting the most recent regulatory requirements and ensuring an enormous variety of application types.

MCBs, MCCBs, and other devices can be positioned positioned in the front panel for ease of access and optimal functionality.

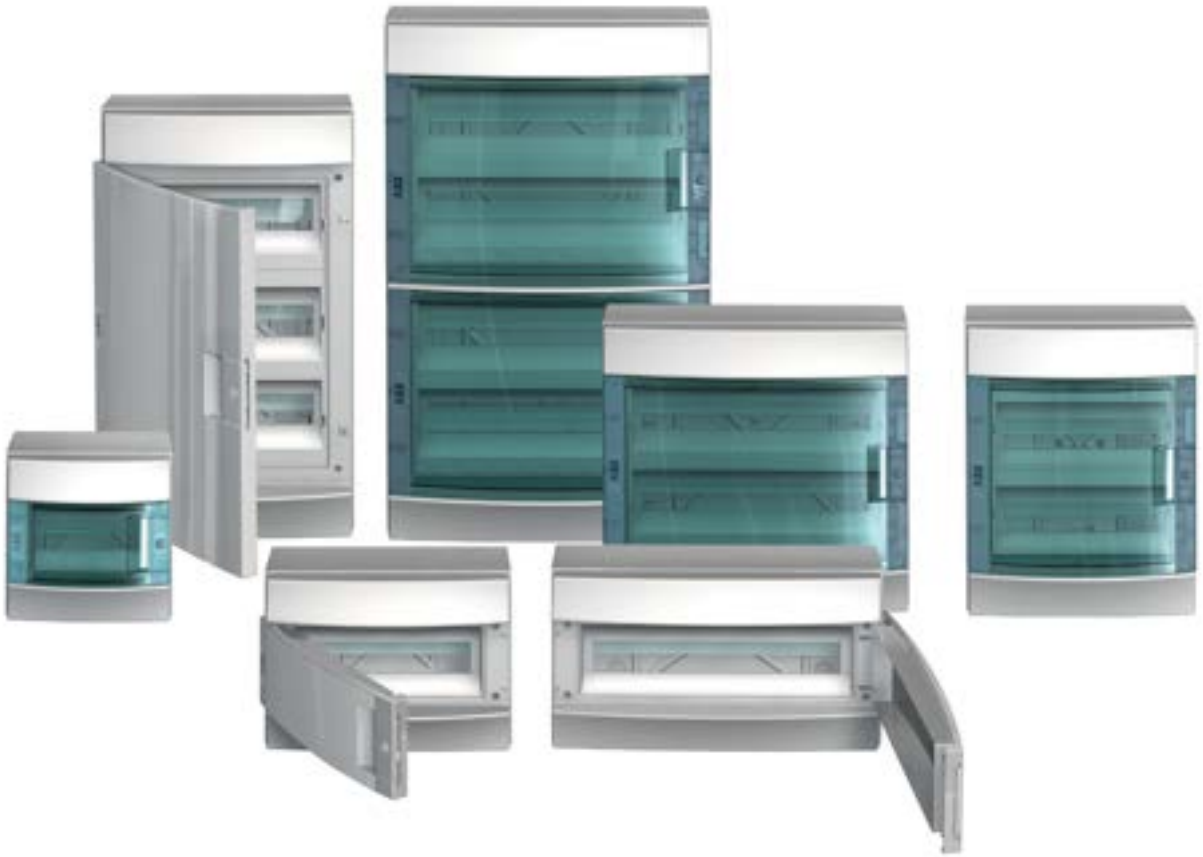

Designed for harsh environments
The MISTRAL65 consumer units come with IP65 protection degree, providing a dust-tight and resistant to jetting water resistance.

Mechanical strength of the MISTRAL65 consumer units are IK09 (10 joule) and IK08 for the precut parts.

Eco-compatible materials
Innovating today does not just mean looking for functional and technologically advanced solutions. For ABB, being innovative means embracing a longer-term perspective by using eco-compatible materials for our products which respect the environment even at the end of their life cycle. For this reason, 100% recyclable, in case of MISTRAL65 even halogen-free, thermoplastics have been used for the consumer units.

Their environmental compatibility has been assessed using the Life Cycle Assessment (LCA) method, an objective tool for analysing energy and environmental impact which analyses the energy and materials used and the emissions released during production.

MISTRAL65H: Consumer units for smarter outdoor installations

Resistance to salt, dust or UV rays is an essential feature in outdoor applications. Saline environments, chemical industries, sandy/dusty or PV applications require specifically robust products to guarantee reliable distribution of energy to where it is required.

IP65 IK10

Made for harsh environments and outdoor installations
The MISTRAL65H consumer units are self-extinguishing and resistant to abnormal heat and fire up to 750°C (GWT). They provide shock resistance IK10 (20 Joules) and IP65 degree of protection.

Available in 4 sizes and with a wide range of accessories the MISTRAL65H enclosures have been specifically designed for heavy duty environments.

Certified robustness
The MISTRAL65H consumer units are perfectly suitable for heavy duty environments and outdoor installations as they have been tested and certified for:

- Dust/sand resistance (factory internal tested)
- Saline environments (according to IEC 60068-2-52)
- Weathering (according to IEC 600068-2-5)
- Permanent sun exposure (IEC 600068-2-5)
- Self-extinguishing and resistant to abnormal heat and fire up to 750°C (GWT)
- Shock resistance: IK10 (20 Joules)
- Degree of protection: IP65
- Common accessories with the MISTRAL65 standard range

MISTRAL65 / 65H

Fast and easy installation of consumer units

The project design also aimed to optimise cabling, assembly and installation times of the consumer units. Everything has been designed to make the installer's job quicker and easier, allowing them to implement functional and tidy consumer units.

MISTRAL65 / 65H
Fast and easy installation of consumer units

In the multi-row versions, the centre distance of the DIN rails can be varied from 150 mm to 125 mm, further increasing the versatility of the product and using the same standard accessories. The frame is extractable for quick and easy bench cabling.

The ample internal space makes the cables more accessible, facilitating cabling and giving the possibility to anchor the cable-ties to special eyeholes on the frame.

The consumer units are designed to house optional dedicated terminal blocks in two different color schemes to allow quick and tidy cabling, and making separate power supplies easily recognisable, when used.

The range is completely coordinated with ABB MCBs and MCCBs, all of which can be easily installed simply by moving the rail provided for their housing.

—
01

—
02

—
03

—
01 **Variable distance of the DIN rails,** 125 mm and 150 mm.
—
02 **Withdrawable frame, adjustable DIN rail depth** to ease the installation of any DIN device.
—
03 **Fast and easy installation** using wall fixing brackets.

MISTRAL65 / 65H
Design and simplicity “all in one”.

The refined design is marked by some particular characteristics, for example the perfect symmetry, which allows either the whole consumer unit or just the front panel to be rotated, easily changing the door opening side.

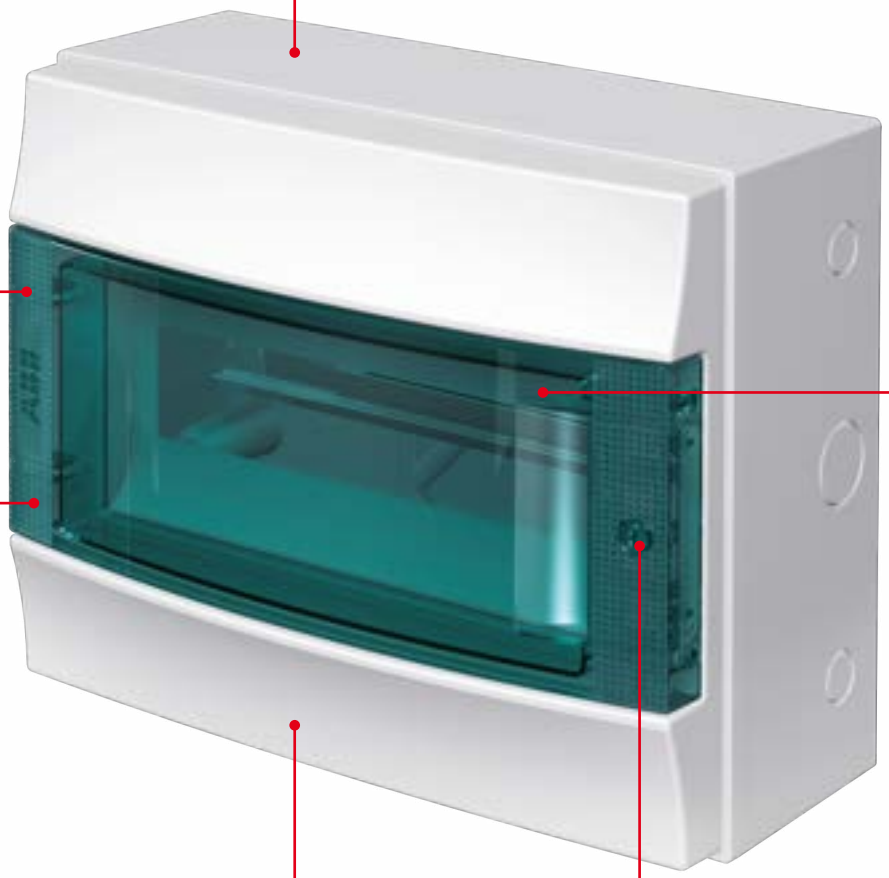

The minimalistic simplicity of the new design combines technological reliability with the most innovative aesthetic trends

The 180° door opening facilitates total accessibility to the interior of the consumer unit

The decorative texture of the door underlines the attention to detail and the quality of the finish

Door available in two versions: petrol blue and opaque

The symmetrical design allows opening of the reversible door either from the left or from the right

The door has an ergonomic handle with snap-on closing or a lock (optional)

MISTRAL65 / 65H

Design and simplicity “all in one”.

MISTRAL65 is equipped with smooth surfaces on top and bottom sides. Knockouts are available on both sides of the enclosure.

Interior slots allow the consumer unit to be fixed to the wall in points which are not visible from the outside, thus contributing to an aesthetically clean installation. Special snap-in closure plugs guarantee protection class II (double insulated).

The possibility to add an additional module by removing two pre-trimmed elements is an extremely useful solution which allows additions to be managed easily and tidily when unforeseen installation requirements are called for.

Mistral65H is equipped on one side with knockouts for cable glands, the other side with a smooth surface.

The standard door with ergonomic handle and snap-on closure can be equipped with a lock and key on request, ensuring only authorised persons have access and avoiding tampering or incorrect operations.

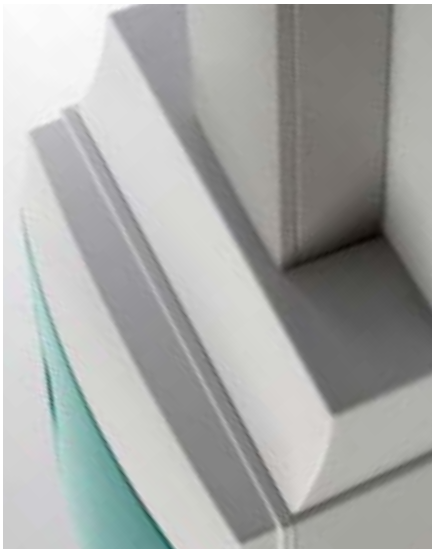

An accessory for trunking entry can be positioned at the top or bottom of the consumer unit, connecting and protecting the conductor bundles. A series of internal knockouts allows it to house any type of trunking.

MISTRAL65 / 65H

For simplicity and effectiveness

Practical rear brackets provide practical and stable wall fastening

Every front panel is supplied with captive screws, giving practical and safety advantages

The side knockouts offer additional possibilities for the cables' path

The dual gasket on the front panel ensures an improved seal

All accessories and the slightest details have been designed and developed in order to maintain double insulation properties at all times

MISTRAL65 / 65H
For simplicity and effectiveness

The extractable frame simplifies and speeds up bench cabling operations. The slotted holes in the frame allow it to be quickly fixed inside the enclosure.

In order to create space at the top or bottom of the consumer unit, the centre distance of the DIN rails can be modified from the standard distance of 150 mm to 125 mm. The closure panels, which are completely reversible, can be unhooked, reversed and reinstalled with a simple click.

Spaces have been created inside the consumer units to make cabling even easier, with cable clips and holes for fastening the conductors to the frame with simple cable-ties.

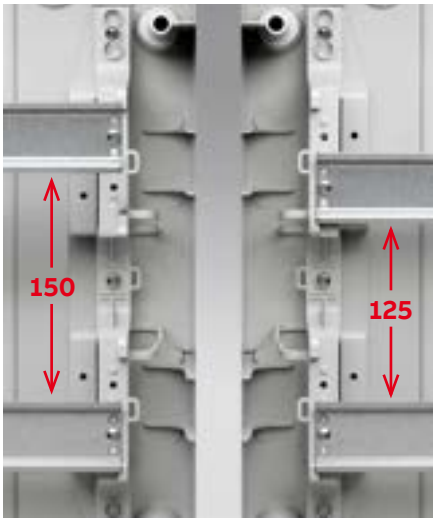

3 different terminal systems available
The MISTRAL range of consumer units is supplied with a wide range of terminal systems: Terminal bars with screws and the two versions of terminal blocks offering screw or screwless couplings.

The consumer units can be installed side by side, with cable gland accessories protecting the conductors' path between adjacent units.

The accessories include blind panels and base plates allowing installation of other types of devices aside from modular DIN rail products such as contactors, manual motor starters or devices on the front of the panel.

MISTRAL65 / 65H
Endless installation possibilities

Our product development was inspired by the objective of allowing a wide range of products and solutions with different functions and dimensions to be installed in a single IP65 consumer unit, thus meeting the widest range of needs even in small commercial or industrial applications.

MCBs, MCCBs and devices installed in the front of the panel in an integrated, rational and functionally appropriate position.

MISTRAL65 / 65H
Endless installation possibilities

The frame allows for two different DIN rail positions. This allows products with different depths to be installed, for example MCCBs which, thanks to this solution, are perfectly aligned with other devices in the panel.

Among these components with greater depth dimensions which can benefit from this flexibility of the frame, we must remember high-performance MCBs with greater than standard depth.

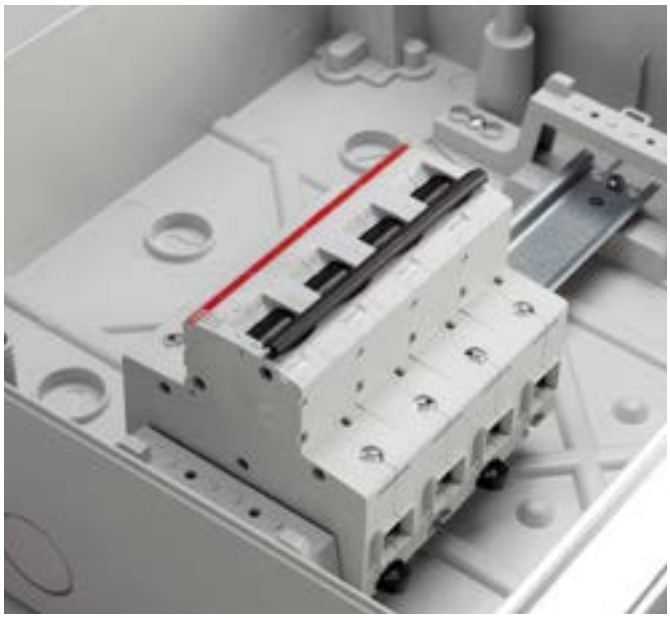

The first depth level allows standard products to be housed; these include most modular products currently available on the market.

Among the accessories, the availability of blank panels and base plates allows non-modular equipment to be installed on the front of the consumer unit, such as control buttons and indicator lights.

MISTRAL65 / 65H
All details at a glance

The simplicity of the consumer units makes adapting them to various system requirements easy.

Optional terminal blocks which can be installed in the top or bottom of the consumer unit allow the cabling to be performed in a tidy manner and their different colors facilitate recognition of any separate circuits.

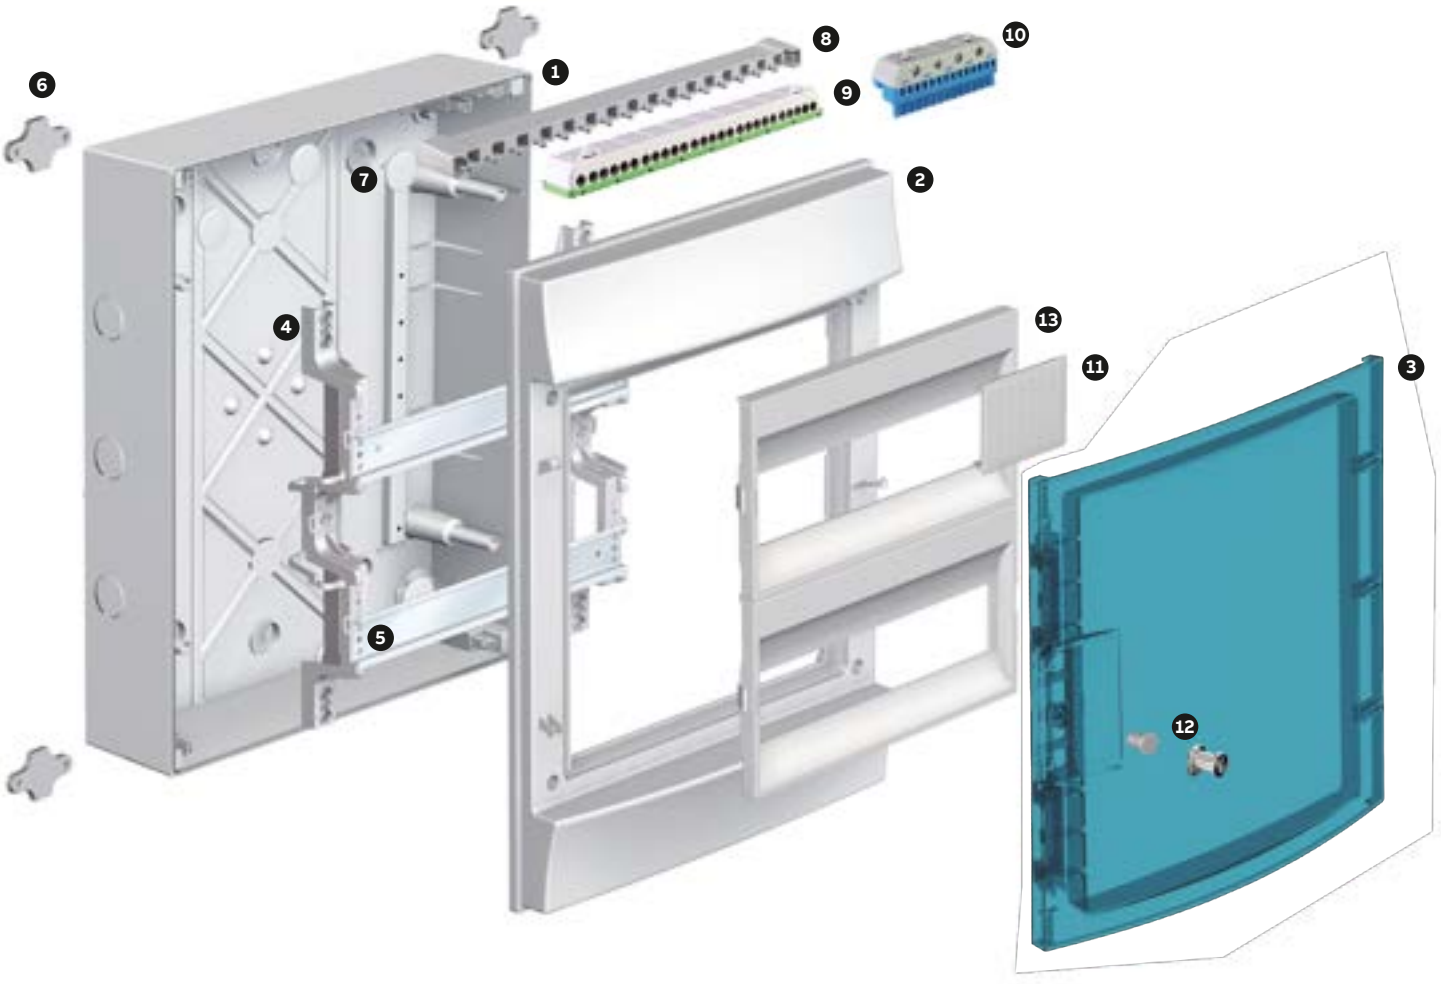

1. **Box for wall mounting**
2. **Reversible front panel**
3. **RAL 7035 opaque door**
4. **Fixed support for DIN rail**
5. **DIN rail**
6. **Wall fastening brackets**
7. **Plugs, protection class II**
8. **Terminal block carriers**
9. **Terminal blocks with screw coupling**
10. **Terminal blocks with screwless coupling**
11. **Module cover**
12. **Finish or closure elements (lock and key optional)**
13. **Reversible panels**

MISTRAL65H Switchboard
Harsh environment series

Resistance to salt, dust and UV rays.

MISTRAL65H is equipped on one side with knockouts for cable glands, the other side with a smooth surface.

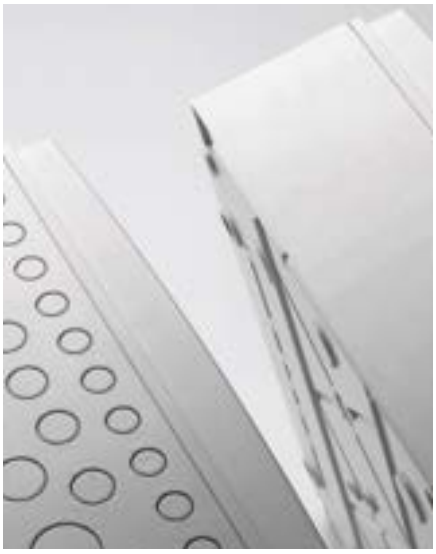

Tmax XT kits are available to install XT1 and XT2 breakers.

Wide range of accessories.

Inner doors allow integration of signaling devices and push buttons for automation applications.

Consumer units

MISTRAL65 – Ordering details wall-mounted IP65

1 Row

2 Rows

3 Rows

4 Rows

MISTRAL65 – Order codes 650

Description	N° of modules [18 mm]	GWT	Dimensions WxHxD [mm]	Order details		Packaging
				Type code	Order code	
1 Row						
Transparent door 4M	4	650	152x202x117	65P04X12	1SL1200A00	1/24
Transparent door 8M	8	650	232x250x154	65P08X12	1SL1201A00	1/11
Transparent door 12M	12	650	320x250x155	65P12X12	1SL1202A00	1/7
Transparent door 18M	18	650	430x250x155	65P18X12	1SL1203A00	1/4
2 Rows						
Transparent door 24M	24	650	320x435x155	65P12X22	1SL1204A00	1/4
Transparent door 36M2F	36	650	430x435x155	65P18X22	1SL1205A00	1/2
3 Rows						
Transparent door 36M3F	36	650	320x600x155	65P12X32	1SL1206A00	1/3
Transparent door 54M	54	650	430x600x155	65P18X32	1SL1208A00	1/1
4 Rows						
Transparent door 48M	48	650	320x735x155	65P12X42	1SL1207A00	1/1
Transparent door 72M	72	650	430x735x155	65P18X42	1SL1209A00	1/1

All units on this page will be delivered without connection terminals

Consumer units

MISTRAL65 – Ordering details with terminals IP65

1 Row

2 Rows

3 Rows

4 Rows

MISTRAL65 – Order codes

Description	N° of modules [18 mm]	GWT	Dimensions W x H x D [mm]	Order details		Packaging
				Type code	Order code	
1 Row						
Transparent door 8M 12SM	8	650	232x250x154	65P08X12A	1SLM006501A1201	1/11
N 3x6mm² + 3x16mm² PE 3x6mm² + 3x16mm²						
Transparent door 12M 22SM	12	650	320x250x155	65P12X12A	1SLM006501A1202	1/7
N 5x6mm² + 6x16mm² PE 5x6mm² + 6x16mm²						
Transparent door 18M 12SM	18	650	430x250x155	65P18X12Z	1SLM006501A1203	1/4
N 3x6mm² + 3x16mm² PE 3x6mm² + 3x16mm²						
Transparent door 18M 32SM	18	650	430x250x155	65P18X12A	1SLM006502A1203	1/4
N 9x6mm² + 7x16mm² PE 9x6mm² + 7x16mm²						
2 Rows						
Transparent door 24M 24SM	24	650	320x435x155	65P12X22Z	1SLM006501A1204	1/4
N 6x6mm² + 5x16mm² PE 6x6mm² + 5x16mm²						
Transparent door 24M 42SM	24	650	320x435x155	65P12X22A	1SLM006502A1204	1/4
N 6x6mm² + 9x16mm² PE 6x6mm² + 9x16mm²						
Transparent door 36M2F 52SM	36	650	430x435x155	65P18X22A	1SLM006501A1205	1/2
N 15x6mm² + 11x16mm² PE 15x6mm² + 11x16mm²						
3 Rows						
Transparent door 36M3F 42SM	36	650	320x600x155	65P12X32A	1SLM006501A1206	1/3
N 15x6mm² + 11x16mm² PE 15x6mm² + 11x16mm²						
Transparent door 54M 52SM	54	650	430x600x1 55	65P18X32A	1SLM006501A1208	
N 1 5x6mm² + 1 1 x1 6mm² PE 1 5x6mm² + 1 1 x1 6mm²						
4 Rows						
Transparent door 48M 52SM	48	650	320x735x155	65P12X42A	1SLM006501A1207	1/1
N 15x6mm² + 11x16mm² PE 15x6mm² + 11x16mm²						
Transparent door 72M 52SM	72	650	430x735x155	65P18X42A	1SLM006501A1209	1/1
N 15x6mm² + 11x16mm² PE 15x6mm² + 11x16mm²						

Consumer units

MISTRAL65H – Ordering details wall-mounted IP65

1 Row

2 Rows

3 Rows

4 Rows

MISTRAL65H – Order codes 750

Description	N° of modules [18 mm]	GWT	Dimensions WxHxD [mm]	Order details		Packaging
				Type code	Order code	
1 Row						
Transparent door 4M	4	750	152x202x117	H65P04X110750	1SLM006500A2210	1/24
Transparent door 8M	8	750	232x250x154	H65P08X120750	1SLM006500A2211	1/11
Transparent door 12M	12	750	320x250x155	H65P12X120750	1SLM006500A2212	1/7
Transparent door 18M	18	750	430x250x155	H65P18X120750	1SLM006500A2213	1/4
2 Rows						
Transparent door 24M	24	750	320x435x155	H65P12X220750	1SLM006500A2214	1/4
Transparent door 36M2F	36	750	430x435x155	H65P18X220750	1SLM006500A2215	1/2
3 Rows						
Transparent door 36M3F	36	750	320x600x155	H65P12X320750	1SLM006500A2216	1/3
Transparent door 54M	54	750	430x600x155	H65P18X320750	1SLM006500A2218	1/1
4 Rows						
Transparent door 48M	48	750	320x735x155	H65P12X420750	1SLM006500A2217	1/1
Transparent door 72M	72	750	430x735x155	H65P18X420750	1SLM006500A2219	1/1

Consumer units

MISTRAL65 / 65H – Ordering details accessories

Transparent door

Inner doors

Base plates

Kits for Tmax XT

MISTRAL65 / 65H / 65H – Common accessories

Description	N° of modules [18 mm]	Packaging	Order details	
			Type code	Order code
Transparent door				
Transparent door 4M	4	1/15	1SL1901A00	1SLM006500A1901
Transparent door 8M	8	1/20	1SL1903A00	1SLM006500A1903
Transparent door 12M	12	1/10	1SL1905A00	1SLM006500A1905
Transparent door 18M	18	1/20	1SL1907A00	1SLM006500A1907
Transparent door 24M / 48M	24/48	1/6	1SL1909A00	1SLM006500A1909
Transparent door 36M (3 rows)	36	1/10	1SL1911A00	1SLM006500A1911
Transparent door 36M (2 rows) / 72M	36/72	1/14	1SL1913A00	1SLM006500A1913
Transparent door 54M	54	1/8	1SL1915A00	1SLM006500A1915
Inner doors				
Inner door for 2x12 size MISTRAL65H	2x12	1	41Z135	1SLM006500A1961
Inner door for 2x18 size MISTRAL65H	2x18	1	41Z136	1SLM006500A1962
Inner door for 3x12 size MISTRAL65H	3x12	1	41Z137	1SLM006500A1963
Inner door for 3x18 size MISTRAL65H	3x18	1	41Z138	1SLM006500A1964
Base plates				
Metal base plate 12M	12	1/12	1SL1920A00	1SLM006500A1920
Metal base plate 2x12M	2x12	1/4	1SL1921A00	1SLM006500A1921
Metal base plate 18M	18	1/8	1SL1922A00	1SLM006500A1922
Metal base plate 2x18M	2x18	1/4	1SL1923A00	1SLM006500A1923
Metal base plate 3x12M	3x12	1/5	41Z125	1SLM006500A1951
Metal base plate 3x18M	3x18	1/5	41Z126	1SLM006500A1952
Plastic base plate 2x12M	2x12	1/5	41Z127	1SLM006500A1953
Plastic base plate 2x18M	2x18	1/5	41Z128	1SLM006500A1954
Plastic base plate 3x12M	3x12	1/5	41Z129	1SLM006500A1955
Plastic base plate 3x18M	3x18	1/5	41Z130	1SLM006500A1956
Kits for Tmax XT				
Kit for Tmax XT 3x12 size MISTRAL65H	3x12	1	41Z133	1SLM006500A1959
Kit for Tmax XT 3x18 size MISTRAL65H	3x18	1	41Z134	1SLM006500A1960
Kit for Tmax XT 2x12 size MISTRAL65H	2x12	1	41Z131	1SLM006500A1969
Kit for Tmax XT 2x18 size MISTRAL65H	2x18	1	41Z132	1SLM006500A1970

Consumer units

MISTRAL65 / 65H – Ordering details accessories

Blind panel

Panel with slot

Lock

Wall fixing brackets

Module blanking cover

Cable gland

Adapter for trunking

Junction unit



Anti condensation kit

Label holder

MISTRAL65 / 65H / 65H – Other accessories

Description	N° of modules [18 mm]	Packaging	Order details	
			Type code	Order code
Blind panel				
Central blind panel 12M MISTRAL65 *	12	1/15	1SL1945A00	1SLM006500A1945
Blind panel 12M MISTRAL65	12	1/20	1SL1946A00	1SLM006500A1946
Central blind panel 18M MISTRAL65 **	18	1/30	1SL1947A00	1SLM006500A1947
Blind panel 18M MISTRAL65	18	1/30	1SL1948A00	1SLM006500A1948
slotted blind panel				
central blind panel slotted 12M	12	1/15	41Z150	1SLM006500A1965
top/bottom blind panel slotted 12M	12	1/20	41Z151	1SLM006500A1966
central blind panel slotted 18M	18	1/30	41Z152	1SLM006500A1967
top/bottom blind panel slotted 18M	18	1/30	41Z153	1SLM006500A1968
Other accessories				
Wall fixing brackets (4 pcs)		1/30	1SL1927A00	1SLM006500A1927
Module cover 12M MISTRAL65 / 65H	12	5/180	1SL1929A00	1SLM006500A1929
Lock with key		1/10	1SL1931A00	1SLM006500A1931
Module cover 12M MISTRAL65 / 65H	12	5/180	1SL1929A00	1SLM006500A1929
Cable gland Ø 16		10/100	1SL1935A00	1SLM006500A1935
Cable gland Ø 20		10/100	1SL1936A00	1SLM006500A1936
Cable gland Ø 25		10/100	1SL1937A00	1SLM006500A1937
Cable gland Ø 32		5/50	1SL1938A00	1SLM006500A1938
Adapter for trunking		1/10	1SL1942A00	1SLM006500A1942
Junction unit Ø 28,5		10/400	1SL1949A00	1SLM006500A1949
Anti-condensation kit		1/6	1SL0351A00	GMA1SL0351A00

Anti-condensation kit

- Kit in special material to prevent condensation from forming inside the switchboard: it include GORE™ MEMBRANE VENTING
- Impermeable to water (pressure): 0.6 bar / 60 sec.
- Air flow: 400 ml/min. (dp = 70 mbar)
- the number of kits to be installed depend on the number and type of devices installed inside the switchboard.
- IP66

Label holder 12M	12	5	ZA8P5	2CPX062598R9999
Label holder running meter		1m	ZA10	2CPX038241R9999

* MISTRAL65 panels 3 rows – 36 modules (3 x 12)
** MISTRAL65 panels 3 rows – 54 modules (3 x 18)

Consumer units
Terminal blocks

ZKS11B

ZKS11G

SCREW – Terminal blocks

Article	Number terminals 1.5 x 6 mm²	Number terminals 1.5 x 16 mm²	maximum rated current [A]	Packaging pack/bulk	Order details Type code	Order code
N screw-terminals For terminal carriers	3 x 6	3 x 16	100	5/270	41Z57	1SPE007715F0731
	6 x 6	5 x 16	100	5/150	41Z58	1SPE007715F0732
	9 x 6	7 x 16	100	5/120	41Z59	1SPE007715F0733
	12 x 6	9 x 16	100	5/90	41Z60	1SPE007715F0734
	15 x 6	11 x 16	100	5/90	41Z61	1SPE007715F0735
PE screw-terminals For terminal carriers	3 x 6	3 x 16	100	5/270	41Z62	1SPE007715F0741
	6 x 6	5 x 16	100	5/150	41Z63	1SPE007715F0742
	9 x 6	7 x 16	100	5/120	41Z64	1SPE007715F0743
	12 x 6	9 x 16	100	5/90	41Z65	1SPE007715F0744
	15 x 6	11 x 16	100	5/90	41Z66	1SPE007715F0745

ZK51B

ZK51G

QUICK PLUG – Terminal blocks screwless

N quick-plug terminals For terminal carriers	5 x 1.5 - 4	0 x 25	63	5/280	41Z70	1SPE007715F9701
	5 x 1.5 - 4	1 x 25	63	5/180	41Z71	1SPE007715F9702
	8 x 1.5 - 4	2 x 25	63	5/150	41Z72	1SPE007715F9703
	11 x 1.5 - 4	3 x 25	63	5/100	41Z73	1SPE007715F9704
	14 x 1.5 - 4	4 x 25	63	5/90	41Z74	1SPE007715F9705
	14 x 1.5 - 4	5 x 25	63	5/70	41Z75	1SPE007715F9706
	20 x 1.5 - 4	6 x 25	63	5/60	41Z76	1SPE007715F9707
N quick-plug terminals	5 x 1.5 - 4	0 x 25	63	1	ZK50BT	2CPX062745R9999
With adapter ZK15 for lateral assembling in the UK6... or for fastening to the DIN rail						
PE quick-plug terminals For terminal carriers	5 x 1.5 - 4	1 x 25	63	5/180	41Z77	1SPE007715F9712
	8 x 1.5 - 4	2 x 25	63	5/150	41Z78	1SPE007715F9713
	11 x 1.5 - 4	3 x 25	63	5/100	41Z79	1SPE007715F9714
	14 x 1.5 - 4	4 x 25	63	5/90	41Z80	1SPE007715F9715
	17 x 1.5 - 4	5 x 25	63	5/70	41Z81	1SPE007715F9716
	20 x 1.5 - 4	6 x 25	63	5/60	41Z82	1SPE007715F9717

MISTRAL41 – Terminal block carriers

Carrier 8M	5/280	41Z67	1SPE007715F0751
Carrier 12M	5/225	41Z68	1SPE007715F0752
Carrier 18M	5/150	41Z69	1SPE007715F0753

Consumer units

Terminal blocks

Terminal blocks

N/PE terminals with units	N screw-terminals	Type	Screw connection system		PE screw-terminals	Type	Screw connection system	
		ZKS6B 41Z57	3 x 6 mm²	3 x 16 mm²		ZKS6G 41Z62	3 x 6 mm²	3 x 16 mm²
		ZKS11B 41Z58	5 x 6 mm²	5 x 16 mm²		ZKS11G 41Z63	5 x 6 mm²	5 x 16 mm²
		ZKS16B 41Z59	9 x 6 mm²	7 x 16 mm²		ZKS11G 41Z63	9 x 6 mm²	7 x 16 mm²
		ZKS21B 41Z60	12 x 6 mm²	9 x 16 mm²		ZKS21G 41Z65	12 x 6 mm²	9 x 16 mm²
		ZKS26B 41Z61	15 x 6 mm²	11 x 16 mm²		ZKS26G 41Z66	15 x 6 mm²	11 x 16 mm²

Terminal blocks screwless

		ZK50B 41Z70 ZK50BT	0 x 25 mm²	5 x 1,5 - 4 mm²	-		-	-
		ZK51B 41Z71	1 x 25 mm²	5 x 1,5 - 4 mm²		ZK51G 41Z77	1 x 25 mm²	5 x 1,5 - 4 mm²
		ZK82B 41Z72	2 x 25 mm²	8 x 1,5 - 4 mm²		ZK82G 41Z78	2 x 25 mm²	8 x 1,5 - 4 mm²
		ZK113B 41Z73	3 x 25 mm²	11 x 1,5 - 4 mm²		ZK113G 41Z79	3 x 25 mm²	11 x 1,5 - 4 mm²
		ZK144B 41Z74	4 x 25 mm²	14 x 1,5 - 4 mm²		ZK144G 41Z80	4 x 25 mm²	14 x 1,5 - 4 mm²
		ZK175B 41Z75	5 x 25 mm²	17 x 1,5 - 4 mm²		ZK175G 41Z81	5 x 25 mm²	17 x 1,5 - 4 mm²
		ZK206B 41Z76	6 x 25 mm²	20 x 1,5 - 4 mm²		ZK206G 41Z82	6 x 25 mm²	20 x 1,5 - 4 mm²
		ZK237B 41Z150	7 x 25 mm²	23 x 1,5 - 4 mm²		ZK237G 41Z152	7 x 25 mm²	23 x 1,5 - 4 mm²
		ZK268B 41Z151	8 x 25 mm²	26 x 1,5 - 4 mm²		ZK268G 41Z153	8 x 25 mm²	26 x 1,5 - 4 mm²

Terminal block carriers

1SPE007715F0751



1SPE007715F0752



1SPE007715F0753



Consumer units

MISTRAL65 / 65H – Ordering details terminal bars



MISTRAL – Terminal bars

Description		Order details	
	Packaging	Type code	Order code
Terminal bar 5 holes D.4.5 mm	1/20	41Z28	M125310000
Terminal bar 10 holes D.4.5 mm and 3 holes D.5.6 mm	1/20	41Z29	M125320000
Terminal bar 16 holes D.4.5 mm and 3 holes D.5.6 mm	1/20	41Z30	M125330000
Terminal bar 15 holes D.4.5 mm and 6 holes D.5.6 mm	1/20	41Z31	M125340000
Terminal bar 19 holes D.4.5 mm and 6 holes D.5.6 mm	1/20	41Z32	M125350000

MISTRAL – Terminal bar carriers

Description		Order details	
	Packaging	Type code	Order code
Carrier for 8 moduls	1/12	41Z25	1SLM004100A1953
Carrier for 12 modules	1/12	41Z26	1SLM004100A1954
Carrier for 18 modules	1/12	41Z27	1SLM004100A1955

Consumer units

MISTRAL65 / 65H – Terminal bars assembly examples

Terminal bar carriers

1SLM004100A1955



1SLM004100A1954



1SLM004100A1953



Terminal bars

M125310000



M125320000



M125330000



M125340000



M125350000



Assembly examples

1SLM004100A1954

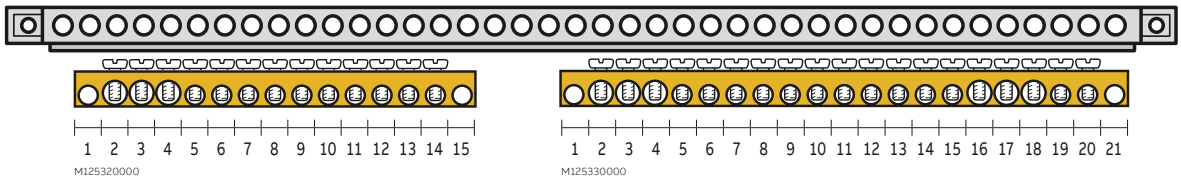

1SLM004100A1954

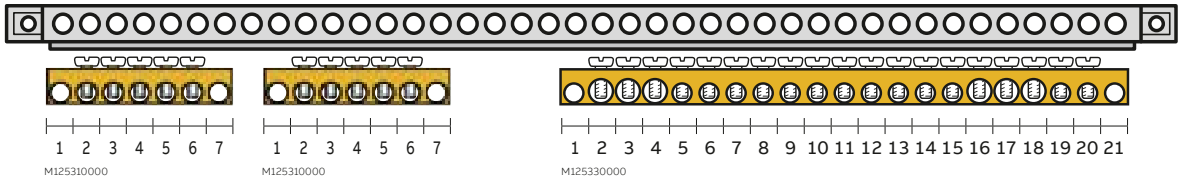

Notes

Mini EUROPA40

Wall-mounting covers without door IP40

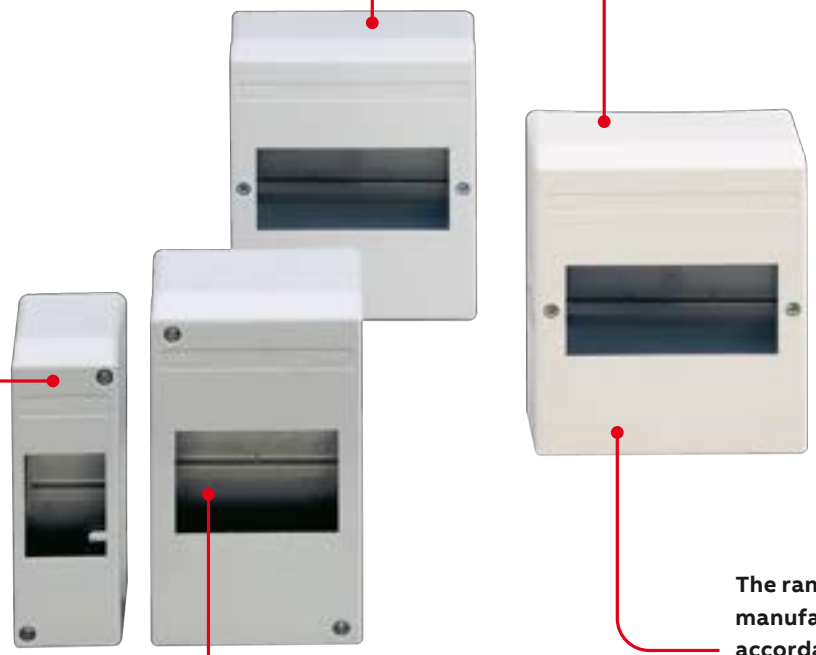

Available in white and grey and three different sizes to accommodate 2 to 6 modules.

The particularly robust and shock resistant frame ensures complete protection of the equipment installed.

The range is manufactured in accordance with the IEC 60670-24 standard.

Each cover is equipped with a DIN bar.

Mini EUROPA40

Wall-mounting covers without door IP40

This consumer unit without door reachs IP40.

The upper and lower walls include precuts on the internal side for the passing through of wiring trunking.

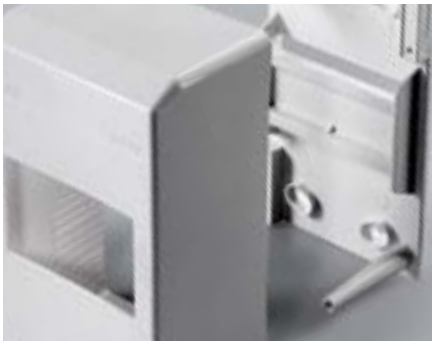

These covers can be opened from the front side to ensure easier access during installation.

Technical characteristics

Protection degree: IP40.
Colour: RAL 9016 red and RAL 7035 grey.
Material: manufactured in self-extinguishing thermoplastic resistant to abnormal heat and to fire up to 650°C (glow wire test), according to IEC 60695-2-11 standard.
Installation temperature: -25°C ÷ +60°C.
Shock resistant: 6 joule (with mounted circuit breakers).
Conformity: IEC 60670-24 certification.

Consumer units

Mini EUROPA40 - Order codes

2 modules

4 modules

6 modules

Description	No. of modules [18 mm]	Dimensions WxHxD [mm]	Packaging	Type code	Order code
RAL 9016 white	2	50x140x65	1/45	1SL2402A00	1SLM002402A0000
RAL 7035 grey	2	50x140x65	1/45	M124220000	1SLM012422A0000
RAL 9016 white	4	95x160x65	1/20	1SL2404A00	1SLM002404A0000
RAL 7035 grey	4	95x160x65	1/20	M124240000	1SLM012424A0000
RAL 9016 white	6	140x160x65	1/12	1SL2406A00	1SLM002406A0000
RAL 7035 grey	6	140x160x65	1/12	1SL2406A00	1SLM012426A0000

Consumer units

Mini EUROPA40 - Order codes

Description No of holes x Ø holes (mm) + No of holes x mm²	For covers type	Packaging	Type code	Order code
Terminal bars				
2x16 + 3x25	1SL2404A00 - 1SL2406A00 12424 - 12426	25/750	M125020000	1SLM125020A0000

Description	No. of modules [18 mm]	Packaging	Type code	Order code
Module covers				
RAL 9016 white	1	50/1500	1SL2857A00	1SLM002857A0000
RAL 9016 white	4	25/300	1SL2859A00	1SLM002859A0000
RAL 7035 grey	4	25/300	M128630000	1SLM012863A0000

Fix-o-Rail 150
A legacy of seamless installation

The innovative design of Fix-o-Rail 150 consumer unit for both commercial and residential installations provides various practical features for quick and easy installations.

Offering a highly versatile range of configurations to suit your project, Fix-o-Rail 150 ranges from 1 to 4 rows, with up to 18-72 module options available. The horizontal coupling design ensures compatibility with both new builds and renovations, while also providing ease of use. Our strong rear panel is specifically designed to conquer uneven surfaces and maximize internal space, making cable management a breeze. In addition, our product is made with halogen-free GWT 650°C materials.

With easy access for maintenance and advanced technology incorporated into the design, the Fix-o-Rail 150 consumer unit minimizes downtime and maximizes productivity. Upgrade your electrical system with the exceptional performance of the Fix-o-Rail 150 consumer unit.

SAVE INSTALLATION TIME

- Faster and easier installation thanks to removable and perforated cable entry plates;
- DIN Rail frame is extractable for even more convenient wiring.

MORE SPACE

- Large wiring space top and bottom, and behind the DIN rails;
- various knock out sections lateral and from the back for cable entry;
- More space available with horizontal coupling.

HARMONIZED TERMINALS

- ABB modular Quick terminals, effortless integrated with T-ribs installation attached to the cable entry plate;
- Old and New Terminals are interchangeable with the new cable entry plates;
- Harmonized terminals with ABB residential enclosures such as UK600, Mistal and ComfortLine.

Consumer units
Fix-o-Rail 150

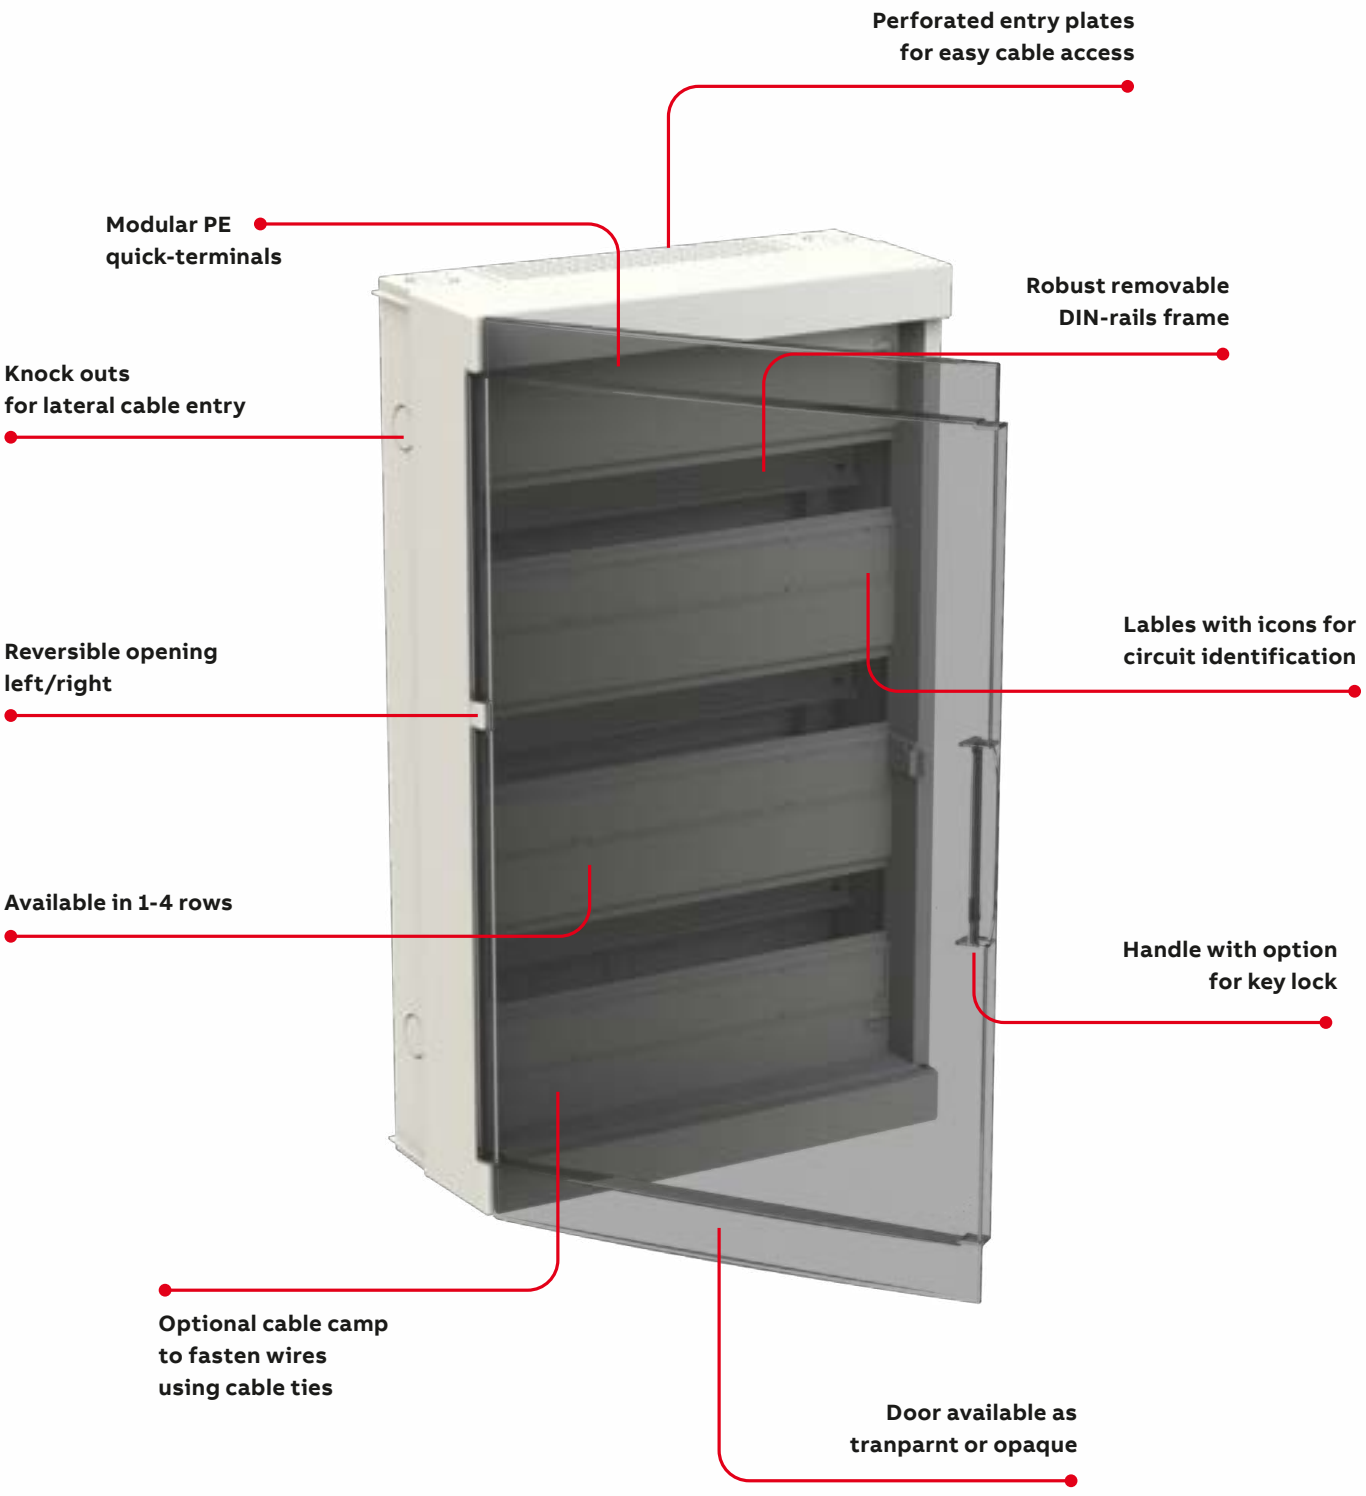

Easy cable entry with perforated entry plate, for cable trunkings, cables and tubes.

Robust base and highly flexible cable entry solution with spacious knockouts.

Safe cable fixation thanks to fixation rail accessory.

Coupling of two enclosures through knock-outs for lateral cross-wiring and coupling set.

Quick locking with fast fxing plastic screw to lock the cover.

Easy and clear labeling with pictorgrams for easy circuit identification.

Extractrable DIN-rail frame for convenient wiring and fast fixation with key holes.

Modular terminals; interchangeable with the previous design.

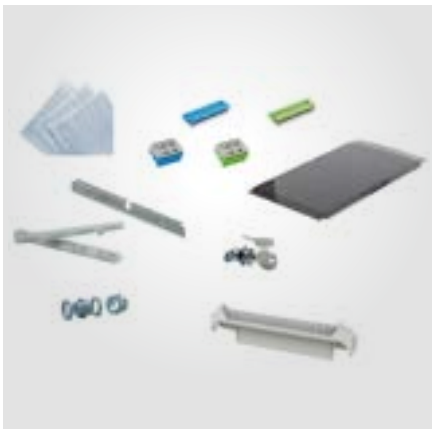

Wide range of accessories – from key locks, to couplers, terminal carriers to cable fixation rails.

Consumer units

Fix-o-Rail 150 with PE quick terminal

Wall-mounted consumer units – FOR150 IP40 with door
I_n up to 100 A
Consumer units IEC 60670-24, IEC 61439 -3
For residential and small commercial application
Mechanical impact strength: IK07
Available in 1 up to 4* row versions as wall-mounted consumer units
Wall box:
- non-warp, break-proof, non-flammable, halogen free plastic
- cable strain relief comb available as accessory
- with detachable DIN rails frame
- horizontaly and verticaly combinable
Reversible door opening, symetric design
Smoky grey transparent or white opaque plastic door
With new PE quick terminals
wiring space behind the DIN rail for professional cable organization
Cover with 90° quick-action screws
7 pieces of insulation caps
Labelholder and sheet with icons
Colour: White, RAL 9010

* FOR 4 rows containing 2 screwless PE terminals

01 Base

02 cable entry plate and PE quick terminal

03 Removable DIN-rails

04 Cover with 90° quick-action screws

05 Transparent or opaque door

Consumer Units

Fix-o-Rail 150 wall-mounted IP40

Fix-o-Rail 150 consumer units with transparent door

	Rows	Mod.	Dimensions H x W x D (mm)	I (A)	Pack	Order details	
						Type code	Order code
Transparent door	1	18	270 x 355 x 150	80A	1	FOR151T18W	4TBR661810C0200
	2	36	450 x 355 x 150	80A	1	FOR152T36W	4TBR661811C0200
	3	54	600 x 355 x 150	100A	1	FOR153T54W	4TBR661812C0200
	4	72	750 x 355 x 150	100A	1	FOR154T72W	4TBR661813C0200

Fix-o-Rail 150 consumer units with opaque door

	Rows	Mod.	Dimensions H x W x D (mm)	I (A)	Pack	Order details	
						Type code	Order code
Opaque door	1	18	270 x 355 x 150	80A	1	FOR151P18W	4TBR661801C0200
	2	36	450 x 355 x 150	80A	1	FOR152P36W	4TBR661802C0200
	3	54	600 x 355 x 150	100A	1	FOR153P54W	4TBR661807C0200
	4	72	750 x 355 x 150	100A	1	FOR154P72W	4TBR661809C0200

Doors

	Description	Row number	Pack	Order details	
				Type code	Order code
	Transparent door for enclosure	1	1	FOR150SD1T	4TBR610277C0200
		2	1	FOR150SD2T	4TBR610287C0200
		3	1	FOR150SD3T	4TBR610297C0200
		4	1	FOR150SD4T	4TBR610305C0200
	Opaque door RAL 9010 for enclosure	1	1	FOR1 50SD1W	4TBR610654C0200
		2	1	FOR1 50SD2W	4TBR610655C0200
		3	1	FOR1 50SD3W	4TBR610656C0200
		4	1	FOR1 50SD4W	4TBR610657C0200

Consumer units

Terminal blocks

Terminal blocks

N/PE terminals with units	N screw-terminals	Type	Screw connection system		PE screw-terminals	Type	Screw connection system	
		ZKS6B 41Z57	3 x 6 mm²	3 x 16 mm²		ZKS6G 41Z62	3 x 6 mm²	3 x 16 mm²
		ZKS11B 41Z58	5 x 6 mm²	5 x 16 mm²		ZKS11G 41Z63	5 x 6 mm²	5 x 16 mm²
		ZKS16B 41Z59	9 x 6 mm²	7 x 16 mm²		ZKS11G 41Z63	9 x 6 mm²	7 x 16 mm²
		ZKS21B 41Z60	12 x 6 mm²	9 x 16 mm²		ZKS21G 41Z65	12 x 6 mm²	9 x 16 mm²
		ZKS26B 41Z61	15 x 6 mm²	11 x 16 mm²		ZKS26G 41Z66	15 x 6 mm²	11 x 16 mm²

Terminal blocks screwless

		ZK50B 41Z70 ZK50BT	0 x 25 mm²	5 x 1,5 - 4 mm²	-		-	-
		ZK51B 41Z71	1 x 25 mm²	5 x 1,5 - 4 mm²		ZK51G 41Z77	1 x 25 mm²	5 x 1,5 - 4 mm²
		ZK82B 41Z72	2 x 25 mm²	8 x 1,5 - 4 mm²		ZK82G 41Z78	2 x 25 mm²	8 x 1,5 - 4 mm²
		ZK113B 41Z73	3 x 25 mm²	11 x 1,5 - 4 mm²		ZK113G 41Z79	3 x 25 mm²	11 x 1,5 - 4 mm²
		ZK144B 41Z74	4 x 25 mm²	14 x 1,5 - 4 mm²		ZK144G 41Z80	4 x 25 mm²	14 x 1,5 - 4 mm²
		ZK175B 41Z75	5 x 25 mm²	17 x 1,5 - 4 mm²		ZK175G 41Z81	5 x 25 mm²	17 x 1,5 - 4 mm²
		ZK206B 41Z76	6 x 25 mm²	20 x 1,5 - 4 mm²		ZK206G 41Z82	6 x 25 mm²	20 x 1,5 - 4 mm²
		ZK237B 41Z150	7 x 25 mm²	23 x 1,5 - 4 mm²		ZK237G 41Z152	7 x 25 mm²	23 x 1,5 - 4 mm²
		ZK268B 41Z151	8 x 25 mm²	26 x 1,5 - 4 mm²		ZK268G 41Z153	8 x 25 mm²	26 x 1,5 - 4 mm²

Cable entry plate with terminal carrier FOR 150

4TBR610630C0200

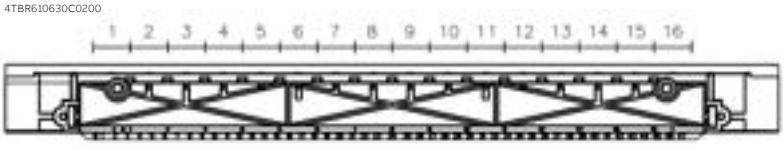

Consumer units
Terminal blocks

ZKS11B

ZKS11G

SCREW – Terminal blocks

Article	Number terminals 1.5 x 6 mm²	Number terminals 1.5 x 16 mm²	maximum rated current [A]	Packaging pack/bulk	Order details Type code	Order code
N screw-terminals For terminal carriers	3 x 6	3 x 16	100	5/270	41Z57	1SPE007715F0731
	6 x 6	5 x 16	100	5/150	41Z58	1SPE007715F0732
	9 x 6	7 x 16	100	5/120	41Z59	1SPE007715F0733
	12 x 6	9 x 16	100	5/90	41Z60	1SPE007715F0734
	15 x 6	11 x 16	100	5/90	41Z61	1SPE007715F0735
PE screw-terminals For terminal carriers	3 x 6	3 x 16	100	5/270	41Z62	1SPE007715F0741
	6 x 6	5 x 16	100	5/150	41Z63	1SPE007715F0742
	9 x 6	7 x 16	100	5/120	41Z64	1SPE007715F0743
	12 x 6	9 x 16	100	5/90	41Z65	1SPE007715F0744
	15 x 6	11 x 16	100	5/90	41Z66	1SPE007715F0745

ZK51B

ZK51G

QUICK PLUG – Terminal blocks screwless

N quick-plug terminals For terminal carriers	5 x 1.5 - 4	0 x 25	63	5/280	41Z70	1SPE007715F9701
	5 x 1.5 - 4	1 x 25	63	5/180	41Z71	1SPE007715F9702
	8 x 1.5 - 4	2 x 25	63	5/150	41Z72	1SPE007715F9703
	11 x 1.5 - 4	3 x 25	63	5/100	41Z73	1SPE007715F9704
	14 x 1.5 - 4	4 x 25	63	5/90	41Z74	1SPE007715F9705
	14 x 1.5 - 4	5 x 25	63	5/70	41Z75	1SPE007715F9706
	20 x 1.5 - 4	6 x 25	63	5/60	41Z76	1SPE007715F9707
N quick-plug terminals	5 x 1.5 - 4	0 x 25	63	1	ZK50BT	2CPX062745R9999
With adapter ZK15 for lateral assembling in the UK6... or for fastening to the DIN rail						
PE quick-plug terminals For terminal carriers	5 x 1.5 - 4	1 x 25	63	5/180	41Z77	1SPE007715F9712
	8 x 1.5 - 4	2 x 25	63	5/150	41Z78	1SPE007715F9713
	11 x 1.5 - 4	3 x 25	63	5/100	41Z79	1SPE007715F9714
	14 x 1.5 - 4	4 x 25	63	5/90	41Z80	1SPE007715F9715
	17 x 1.5 - 4	5 x 25	63	5/70	41Z81	1SPE007715F9716
	20 x 1.5 - 4	6 x 25	63	5/60	41Z82	1SPE007715F9717

Consumer units

Fix-o-Rail 150 - Surface-mounted enclosures IP40

	Type	Order code	Pack
Screw-fit ground busbar support			
	Connection: 18 x 16 mm²		
	FORTPES18	4TBR610385C0200	4
	Connection: 14 x 16 mm²		
	FORTPES14	4TBR610386C0200	4

	Type	Order code	Pack
Coupling kit (2 parts)			
	For routing output cables and the mechanical coupling to the Fix-o-Rail		
	FOR150C	4TBR610327C0200	1

	Type	Order code	Pack
Support with distribution rail			
	Connection: 2 (17 x 16 mm²)		
	FRTL2SC	4TBR610532C0200	4

	Type	Order code	Pack
Cable clamp comb (2 pieces) with 4 screws			
	FOR150SCR	4TBR610630C0200	1

	Type	Order code	Pack
Module blanking covers Sectionable by 1/2 module			
	12 modules grey		
	ZA1P5	2CPX062384R9999	5
	ZA1P50	2CPX062378R9999	50
	4 modules grey		
	FORSTBP500	4TBR610484C0200	500

	Type	Order code	Pack
Kit: 4 quarter-turn screws, 7 insulating caps, 4 screws for entry plate, 4 screws for screwless ground rail RAL9010			
	FOR150SCPW	4TBR610645C0200	1

	Type	Order code	Pack
Labels and label holders			
	Set of 50 labels and label holders		
	FOR150LH	4TBR610270C0200	1

	Type	Order code	Pack
Cable entry plates (2 pieces) with 4 screws RAL9010			
	FOR150SCPW	4TBR610645C0200	1

	Type	Order code	Pack
Adhesive icons			
	For clear and durable circuit identification. May be affixed to label holders. Set of 50 pieces.		
	FOR150FPIC	4TBR610380C0200	1

	Type	Order code	Pack
Lock			
	Security lock with 2 keys		
	FOR150SL	4TBR610170C0200	1

Description	No. of modules [18 mm]	Packaging	Type code	Order code
Module blanking covers				
RAL 9016 white	1	50/1500	1SL2857A00	1SLM002857A0000
RAL 9016 white	4	25/300	1SL2859A00	1SLM002859A0000
RAL 7035 grey	4	25/300	M128630000	1SLM012863A0000
RAL 7035 grey	4	500	FORSTBP500	4TBR610484C0200
RAL 7035 grey	12	5	ZA1P5	2CPX062384R9999
RAL 7035 grey	12	50	ZA1P50	2CPX062378R9999

Consumer units

Fix-o-Rail Junior - wall-mounted IP40

Wall-mounted consumer units – Fi-o-Rail Junor IP40
I_n 32/63 A
Consumer units IEC 60670-24, IEC 61439 -3
For residential and small commercial application
Mechanical impact strength: IK07
4 or 8 moules
Materials:
- Base HIPS 650°C GWT
- Cover PC 960°C GWT
With detachable DIN rail
smokey grey tranparent flap
terminals available as accessories
Colour: Grey, RAL 7035

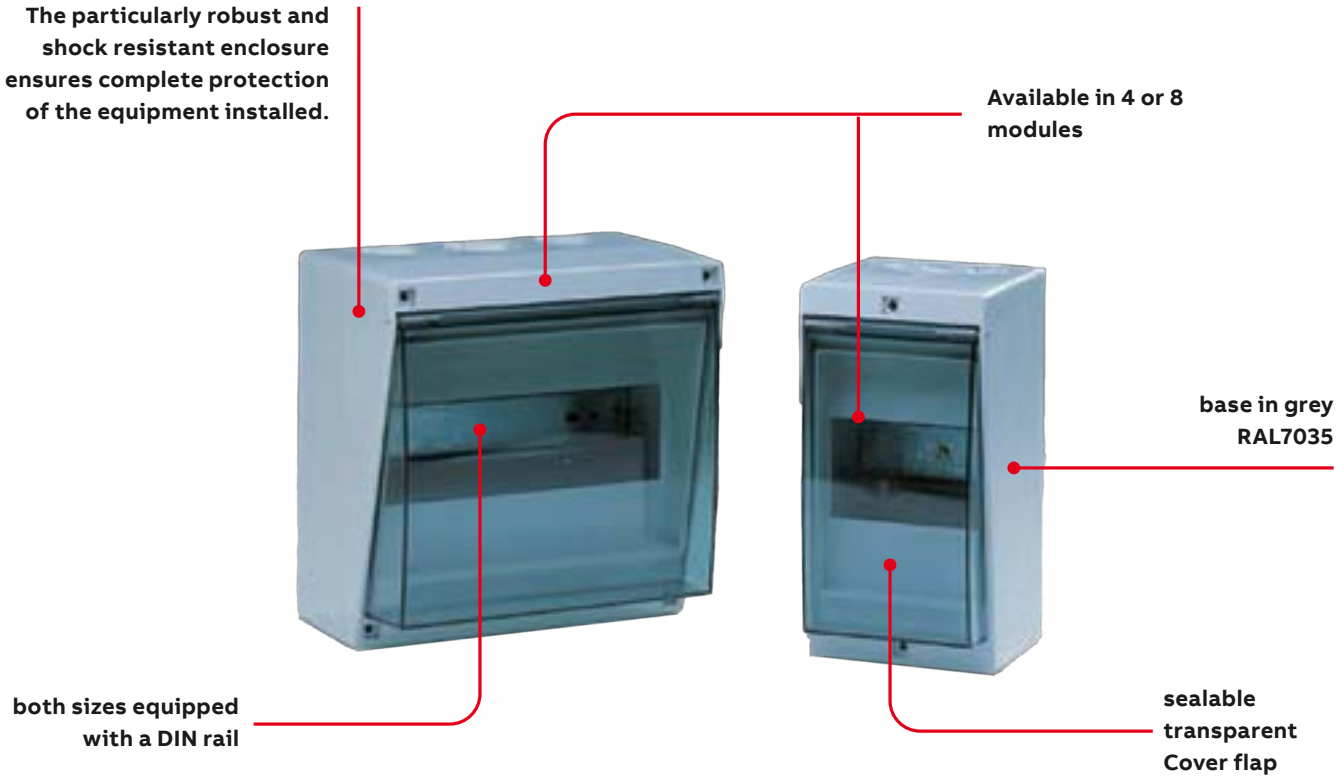

Consumer units

Fix-o-Rail Junior - wall-mounted IP40

		Dimensions H x W x D (mm)	Modules	Type	Order code	Pack
	Equipment depth: max. 70 mm I = 32 A Supplied with universal cable glands: 2 x PG29	170 x 90 x 100	4	FORJR4	4TBR610145C0200	1
	Equipment depth: max. 92.5 mm I = 63 A Supplied with universal cable glands: 2 x PG29, 1 x PG21 and 1 x PG29	170 x 175 x 120	8	FORJR8	4TBR610156C0200	

Accessories

	Type	Order code	Pack
Neutral/ground busbar for 4-module enclosure			
	Connection: 5 x 16 mm²		
	FORJRTPE	4TBR610141C0200	2

	Type	Order code	Pack
Sealing kit			
	FORJRSB	4TBR610140C0200	2

	Type	Order code	Pack
Neutral/ground busbar for 8-module enclosure			
	Connection: 6 x 10 mm² and 2 x 16 mm² (ground busbar)		
	FORSTTPE	4TBR610186C0200	4
	Connection: 6 x 10 mm² and 2 x 16 mm² (neutral)		
	FORSTTN	4TBR610187C0200	4

	Type	Order code	Pack
Universal cable glands			
	PG16		
	FORJRPG16	4TBR610130C0200	25
	PG21		
	FORJRPG21	4TBR610132C0200	25
	PG29		
	FORJRPG29	4TBR610133C0200	25

	Description	No. of modules [18 mm]	Packaging	Type code	Order code
	Module blanking covers				
	RAL 9016 white	1	50/1500	1SL2857A00	1SLM002857A0000
	RAL 9016 white	4	25/300	1SL2859A00	1SLM002859A0000
	RAL 7035 grey	4	25/300	M128630000	1SLM012863A0000
	RAL 7035 grey	4	500	FORSTBP500	4TBR610484C0200
	RAL 7035 grey	12	5	ZA1P5	2CPX062384R9999
	RAL 7035 grey	12	50	ZA1P50	2CPX062378R9999

Notes

GENERAL PURPOSE ENCLOSURES

Electrical installation solutions for buildings
General purpose enclosures

Index

APO	**4**
Modular polyester boxes	4
VMS	**16**
Modular system	16
ARIA	**128**
Universal polyester enclosures	128
PolySafe	**134**
Multi-function polyester enclosures	134
Accessories	148
Gemini	**176**
Basic configuration - Gemini switchboards	184
Components for automation applications	187
Components for distribution and mixed applications	192
Accessories	200
Fast selection table	205
Configurations examples	209

Notes

General Purpose Enclosures

Range overview

IP66 Multibox	IP67 APO	IP65/66 ARIA	IP54/55/65 PolySafe
65x65x57/81	186x151x140	300x200x170	500x500x320
94x65x57/81	302x186x175	400x300x170	500x750x320
94x94x57/81	302x302x175	500x400x230	500x1000x320
110x110x66/90	372x302x175	600x400x230	750x500x320
130x94x57/81	488x302x175	700x500x270	750x750x320
130x130x75/99	558x302x175	800x600x300	750x1000x320
180x94x57/81	603x302x175	 1000x800x300	750x1250x320
180x110x90/111/165	603x372x175		1000x500x320
 182x180x90/111/165	603x603x175		1000x750x320
 254x180x90/111/165			1000x1000x320
 361x254x111/165			1000x1000x320
			1000x1250x320
			1250x750x320
			1250x1000x320
			1250x1000x320
			1250x1000x320

General purpose enclosures

APO - Modular polyester boxes

APO

Applications

- Heavy industry
- Refineries
- Shipyards
- Steelworks
- Breweries
- Petro-chemical industry
- Public works
- Solar energy applications

Standard: EN/IEC 62208

Specifications

- The range comprises nine different sizes with 300 and 185 mm modules.
- The base is fabricated from polyester, hot press molded and reinforced with glass fiber, dyed in mass RAL 7035 light gray color. It is equipped with M4 inserts (Dodge-type) for attaching a mounting plate or a frame.
- The cover may be fabricated from transparent polycarbonate or hot press molded polyester, reinforced with glass fiber, dyed in mass RAL 7035 light gray color.
- Maximum protection for the user and equipment thanks to its total insulation ⧈ and IP67 protection rating in accordance with EN/IEC 60529.
- IK08 protection rating against external mechanical impacts in accordance with EN/IEC 62208.
- Each box, which is a multiple of a smaller one, also has a variety of the mounting points of the smaller box. These points have non-threaded holes for embedded M4 inserts.
- The base also includes four to six non-threaded holes for embedded M6 inserts.
- The box may be wall-mounted or on a pedestal.
- Material is simple to work with using conventional tools such as drills, mills, saws, etc.
- Polyester boxes can resist temperatures of up to 70°C under continuous operation and peak temperatures of up to 130°C. The transparent polycarbonate covers can resist operating temperatures of up to 120°C.
- Insulation voltage Ui = 1000 V and 1500 V dc.
- APO enclosures are UL Listed, in accordance with the UL Standard 508. They are also CSA-certified.

Standards/Certification

- Boxes with polyester cover: types 3, 3R, 4, 4X, 6, 6P, 12 and 13
- Enclosures with polycarbonate cover: types 3, 3R, 4, 4X, 12 and 13
- Boxes with hinged cover: types 3, 3R, 4, 4X, 6, 12 and 13
  Available upon request.

- Boxes with polyester cover: types 3, 3R, 4, 4X, 6, 6P, 12 and 13
- Boxes with polycarbonate cover: types 3, 3R, 4, 4X, 12 and 13
- Boxes with hinged cover: types 3, 3R, 4, 4X, 6, 12 and 13
  Available upon request.

Lloyd's Register of Shipping[1]

[1] Except APO 12

General purpose enclosures

APO - Modular polyester boxes

Modular insulated box system

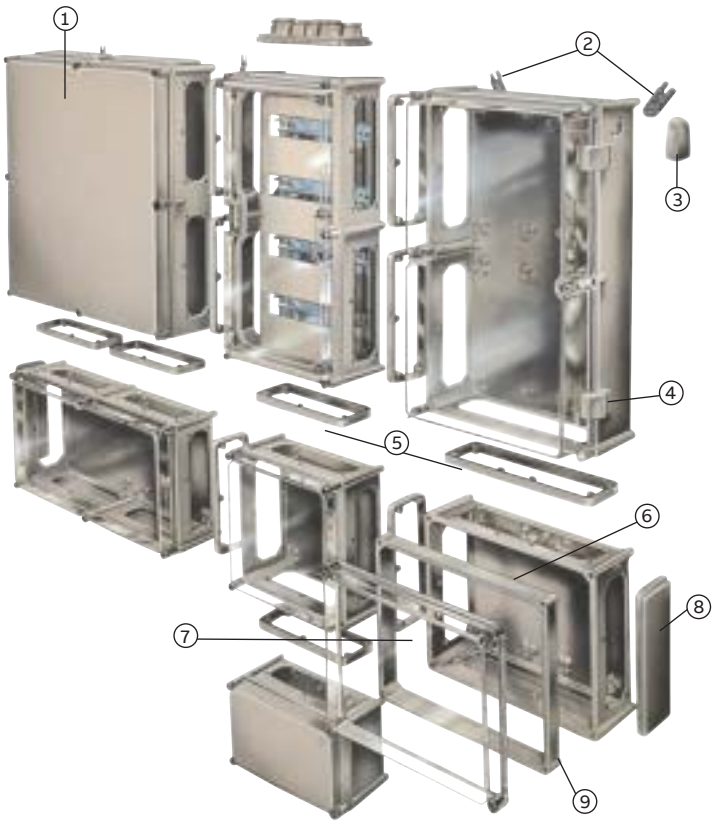

1. Polyester cover
2. Fixing lugs, stainless steel or polyamide
3. Fan
4. Hinge made from insulating material
5. Coupling frame
6. Depth extension frame
7. Transparent polycarbonate cover
8. Solid polyester closure plate
9. Polyurethane gasket

Optimal modular application

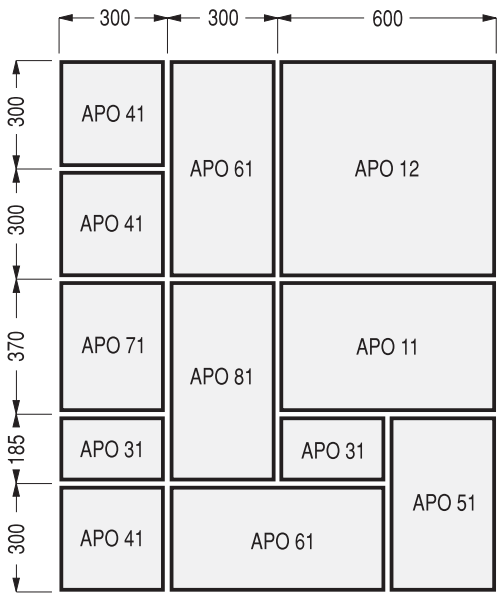

Technical data

Protection classification in accordance with IEC 60529		
Polyester cabinets	with 100% polyester cover	IP67
	with transparent polycarbonate cover	IP66
	with hinged cover	IP67
Cabinet with rubber cable entry		IP43/54(2)
Cabinet combination(s)		IP67(1)
Cabinet with raised frame		IP66

(1) Depending on cover used
(2) IP54 if cable entry is mounted at the bottom of the cabinet.

General purpose enclosures

APO - Modular polyester boxes

		Type	APO 1	APO 31	APO 41	APO 71
	Enclosure with polyester cover IP67 Solid cover with securing screws	H x W x D	186 x 151 x 140	302 x 186 x 175	302 x 302 x 175	370 x 300 x 175
		Type	AP1P	AP31P	AP41P	AP71P
		Order code	4TBO856048C0100	4TBO856049C0100	4TBO856050C0100	4TBO856051C0100
	Enclosure with polycarbonate cover: IP66 Transparent cover with securing screws	H x W x D	185 x 151 x 140	300 x 185 x 175	300 x 300 x 175	370 x 300 x 175
		Type	AP1T	AP31T	AP41T	AP71T
		Order code	4TBO856057C0100	4TBO856058C0100	4TBO856059C0100	4TBO856060C0100
	Enclosure with pivoting cover IP67 Transparent cover with clip-in buttons	H x W x D		300 x 185 x 175	300 x 300 x 175	370 x 300 x 175
		Type	-	AP31THC	AP41THC	AP71THC
		Order code		4TBO856066C0100	4TBO856067C0100	4TBO856068C0100
	Enclosure with hinged cover IP55 Solid cover	H x W x D	185 x 151 x 140	300 x 185 x 175	300 x 300 x 175	370 x 300 x 175
		Type	AP1PHC	AP31PHC	AP41PHC	AP71PHC
		Order code	4TBO856071C0100	4TBO856072C0100	4TBO856073C0100	4TBO856074C0100

Pack = 1

(2) UL/CSA certified

General purpose enclosures

APO - Modular polyester boxes





	APO 51	APO 81	APO 61	APO 11	APO 12
	488x302x175	558x302x175	602x302x175	603x372x175	603x603x175
	AP51P	AP81P	AP61P	AP11P	AP12P
	4TBO856052C0100	4TBO856053C0100	4TBO856054C0100	4TBO856055C0100	4TBO856056C0100
	485x300x210	555x300x210	600x300x210	600x370x210	600x600x210
	AP51T	AP81T	AP61T	AP11T	AP12T
	4TBO856061C0100	4TBO856062C0100	4TBO856063C0100	4TBO856064C0100	4TBO856065C0100
	485x300x175		600x300x175		
	AP51THC	-	AP61THC	-	-
	4TBO856069C0100		4TBO856070C0100		
	485x300x175	555x300x175	600x300x175	600x370x175	600x600x175
	AP51PHC	AP81PHC	AP61PHC	AP11PHC	AP12PHC
	4TBO856075C0100	4TBO856076C0100	4TBO856077C0100	4TBO856078C0100	4TBO856079C0100

General purpose enclosures

APO - Modular polyester boxes

		Type	APO 1	APO 31	APO 41	APO 71
	Base with solid walls	H x W x D	186 x 151 x 85	302 x 186 x 131	302 x 302 x 131	372 x 302 x 131
		Type	AP1B	AP31B	AP41B	AP71B
		Order code	4TBO856000C0100	4TBO856001C0100	4TBO856002C0100	4TBO856003C0100
		Pack	4	4	1	4
	Base with 2 open walls The dimensions with shading are those of the open walls	H x W x D		302 x 186 x 131	302 x 302 x 131	372 x 302 x 131
		Type	-	AP31B2	AP41B2	AP71B2
		Order code		4TBO856009C0100	4TBO856010C0100	4TBO856011C0100
		Pack		4	4	4
	Base with 4 open walls	H x W x D		302 x 186 x 131	302 x 302 x 131	372 x 302 x 131
		Type	-	AP31B4	AP41B4	AP71B4
		Order code		4TBO856017C0100	4TBO856018C0100	4TBO856019C0100
		Pack		4	4	4
	Polyester cover Solid cover including securing screws	H x W x D	186 x 151 x 45	302 x 186 x 45	302 x 302 x 45	372 x 302 x 45
		Type	AP1PC	AP31PC	AP41PC	AP71PC
		Order code	4TBO856025C0100	4TBO856026C0100	4TBO856027C0100	4TBO856028C0100
		Pack	4	4	4	4
	Polycarbonate cover Transparent cover with securing screws	H x W x D	186 x 151 x 45	302 x 186 x 45	302 x 302 x 45	372 x 302 x 45
		Type	AP1TC	AP31TC	AP41TC	AP71TC
		Order code	4TBO851196C0100	4TBO851173C0100	4TBO851277C0100	4TBO851176C0100
		H x W x D				
		Type	-	-	-	-
		Order code				
		Pack	4	4	4	4
	Pivoting cover Transparent cover with clip-in buttons for the frame	H x W x D		302 x 186 x 35	302 x 302 x 45	372 x 302 x 45
		Type	-	AP31STHC	AP41STHC	AP71STHC
		Order code		4TBO856034C0100	4TBO856035C0100	4TBO856036C0100
		Pack		4	4	4
	Depth extension frame Reinforced with PA6 polyamide glass fiber	H x W x D	186 x 151 x 35	302 x 186 x 35	302 x 302 x 35	372 x 302 x 35
		Type	AP1DE	AP31DE	AP41DE	AP71DE
		Order code	4TBO856040C0100	4TBO856041C0100	4TBO856042C0100	4TBO856043C0100
		Pack	4	4	4	4
	Mounting plate Pertinax 5 mm Galvanized steel Sendzimir 2 mm 1.5 mm perforated plate (Slide nuts, see I.22)	H x W x D	140 x 105	228 x 139	254 x 228	298 x 254
		Type	AP1MHP	AP31MHP	AP41MHP	AP71MHP
		Order code	4TBO851190C0100	4TBO851187C0100	4TBO851278C0100	4TBO851181C0100
		H x W x D	134 x 99	249 x 134	249 x 249	319 x 249
		Type	AP1MS	AP31MS	AP41MS	AP71MS
		Order code	4TBO851191C0100	4TBO851188C0100	4TBO851279C0100	4TBO851185C0100
		H x W x D	134 x 99	249 x 134	249 x 249	319 x 249
		Type	-	AP31MSP	AP41MSP	AP71MSP
		Order code		4TBO852875C0100	4TBO852876C0100	4TBO852877C0100
		Pack	1	1	1	1

General purpose enclosures

APO - Modular polyester boxes

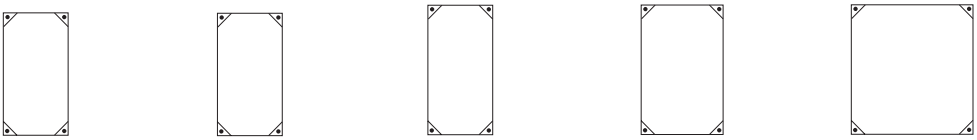

APO 51	APO 81	APO 61	APO 11	APO 12
488 x 302 x 131	558 x 302 x 131	603 x 302 x 131	603 x 372 x 131	603 x 603 x 131
AP51B	AP81B	AP61B	AP11B	AP12B
4TBO856004C0100	4TBO856005C0100	4TBO856006C0100	4TBO856007C0100	4TBO856008C0100
2	2	2	2	2
488 x 302 x 131	558 x 302 x 131	603 x 302 x 131	603 x 372 x 131	603 x 603 x 131
AP51B2	AP81B2	AP61B2	AP11B2	AP12B2
4TBO856012C0100	4TBO856013C0100	4TBO856014C0100	4TBO856015C0100	4TBO856016C0100
2	2	2	2	2
488 x 302 x 131	558 x 302 x 131	603 x 302 x 131	603 x 372 x 131	603 x 603 x 131
AP51B4	AP81B4	AP61B4	AP11B4	AP12B4
4TBO856020C0100	4TBO856021C0100	4TBO856022C0100	4TBO856023C0100	4TBO856024C0100
2	2	2	2	2
488 x 302 x 45	558 x 302 x 45	603 x 302 x 45	603 x 372 x 45	603 x 603 x 45
AP51PC	AP81PC	AP61PC	AP11PC	AP12PC
4TBO856029C0100	4TBO856030C0100	4TBO856031C0100	4TBO856032C0100	4TBO856033C0100
2	2	2	2	2
488 x 302 x 80	558 x 302 x 80	603 x 302 x 80	603 x 372 x 80	603 x 603 x 80
AP51TC	AP81CP	AP61TC	AP11TC	AP12TC
4TBO852092C0100	4TBO851193C0100	4TBO851282C0100	4TBO851290C0100	4TBO852280C0100
		603 x 302 x 45		
-	-	-	-	-
2	2	2	2	2
488 x 302 x 45		603 x 302 x 45	603 x 372 x 115	
AP51STHC	-	AP61STHC	AP11STHC	-
4TBO856037C0100		4TBO856038C0100	4TBO856039C0100 (1)	
2		2	2	
	558 x 302 x 60	603 x 302 x 60	603 x 372 x 60	603 x 603 x 60
-	AP81DE	AP61DE	AP11DE	AP12DE
	4TBO856044C0100	4TBO856045C0100	4TBO856046C0100	4TBO856047C0100
	2	2	2	2
413 x 254	484 x 254	528 x 254	528 x 324	555 x 555
AP51MHP	AP81MHP	AP61MHP	AP11MHP	AP12MHP
4TBO852091C0100	4TBO851170C0100	4TBO851286C0100	4TBO851289C0100	4TBO852174C0100
435 x 249	505 x 249	550 x 249	550 x 319	550 x 555
AP51MS	AP81MS	AP61MS	AP11MS	AP12MS
4TBO852095C0100	4TBO851171C0100	4TBO851287C0100	4TBO851292C0100	4TBO852178C0100
435 x 249	505 x 249	550 x 249	550 x 319	550 x 555
AP51MSP	-	-	-	-
4TBO852878C0100				
1	1	1	1	1

(1) 4TBO856039C0100 2

Pivoting cover with deep frame

General purpose enclosures

APO - Accessories

Product		Type	Order code	Pack
Polystyrene closure plates				
PG/Metric specifications	Width			
4xM20/16 + 1xM32/25	185	APEP185	4TBO856096C0100	1
2xM32/25 + 3xM25/ M20 + 4xM20/16	300	APEP35	4TBO856131C0100	1
9xM25/20	300	APEP31	4TBO856097C0100	1
2xM50/40 + 2xM25/	300	APEP32	4TBO856098C0100	1
13xM20/16	300	APEP33	4TBO856099C0100	1
3xM40/32 + 2xM20/16	300	APEP34	4TBO856100C0100	1
1xM40/32 + 10xM25/20	370	APEP371	4TBO856101C0100	1
13xM25/20	370	APEP372	4TBO856102C0100	1

Solid polyester closure plates				
	Width			
	185	APBP185	4TBO856103C0100	1
	300	APBP3	4TBO856104C0100	1
	370	APBP37	4TBO856105C0100	1

Dimensions for maximum cut-out, see Technical Guide

Product	Type	Order code	Pack
Coupling frames			

Made of glass fiber-reinforced polyamide.
- Supplied with a template.
- The slimmest section of the frame must be mounted toward the front of the base.
- The maximum obtainable passage between two bases is that indicated by the template.

The required number of openings may be applied within this space.

Width			
185	APCF185	4TBO856106C0100	1
300	APCF3	4TBO856107C0100	1
370	APCF37	4TBO856108C0100	1

Dimensions for maximum cut-out, see Technical Guide

Cable end boxes						
For walls	Type	Cable max Ø (mm)	Number of clamps supplied	Made of polyester		
300	APO31	1 x 75	1	AP31CEB	4TBO856115C0100	1
300	APO31	2 x 75	2	AP31CEB2	4TBO856116C0100	1
300	APO41	1 x 75	1	AP41CEB	4TBO856117C0100	1
300	APO61	1 x 75	1	AP61CEB	4TBO781936C0100	1
300	APO71	1 x 71	1	AP71CEB	4TBO781937C0100	1
370	APO71	3 x 75	1	AP71CEB2	4TBO856118C0100	1

Dimensions, see Technical Guide

Cable grip clamps[1]			
	For attaching directly inside the cable end box. Cable max. Ø: 75mm Used on APO 31 and APO 71 For 185, 300 and 370mm enclosures		
	AP31CC75	4TBO851105C0100	1
	Universal cable grip clamp Cable max. Ø: 75mm Used on APO 41 For 300, 370 and 600mm enclosures		
	AP41CC75	4TBO851110C0100	1
	Additional bracket for attaching to the clamp support. Cable max. Ø: 75mm		
	APCC75	4TBO851111C0100	1
	(1) See Technical Guide		

General purpose enclosures

APO - Accessories

Product	Type	Order code	Pack
Rubber cable entry			
- For direct mounting - Supplied with a template			
	APRCS	4TBO851106C0100	1
 			
For creating cable end. Cable max. Ø: 75mm			

Product	Type	Order code	Pack
Cable routing insert			
Makes connecting large-section cables simple while maintaining the original level of protection.			
	For 300mm side.		
	APBR3	4TBO851103C0100	1
	For 370mm side.		
	APBR37	4TBO851112C0100	1

Product	Type	Order code	Pack
Locks(1)			
Supplied with drilling template and mounting accessories.			
	Handle with 2 keys V2432E		
	APL2432E	4TBO852020C0100	1
(1) Not for use with pivoting cover			

Product	Type	Order code	Pack
IP44 Vent			
Install 2 vents per enclosure for ventilation to prevent the formation of condensation. Supplied with a template and fixings. Recommended installation: one vent at the highest and lowest points on each side of the enclosure.			
	Set of 2 polyamide pieces. RAL 7035		
	PS833677	4TBP833677C0100	1

Product	Type	Order code	Pack
Pedestal mounting			
- The C profiles are mounted directly to the rear of the base using the bosses provided. - The brackets may be distributed along the length of the C profile according to the width of the pedestal.			
	Set of 2 C profiles and screws. For enclosure 300 and 370mm side.		
	APPM	4TBO890510C2100	1

Product	Type	Order code	Pack
Fixing lugs			
Set of 4 supports and screws, in glass fiber-reinforced polyamide.			
	- For external mounting points. - Direct mounting through the 4 corner holes of the enclosure. - If using depth extension frames, first attach the supports. - Max equipment weight: 100kg.		
	APMBPA	4TBO851266C0100	1
Set of 4 stainless supports and screws (304-type)			
	- For very severe operating conditions. - The 4 brackets are mounted directly onto the rear of the base in the section that is reinforced for this purpose. - Mounting by means of M4 threaded inserts (provided). - Max equipment weight: 100kg.		
	APMBRVS	4TBO852025C0100	1

General purpose enclosures

APO - Accessories

Product			Type	Order code	Pack
Hinges					
Type		Type	Hinges		
		A	A APHA	4TBO856109C0100	1
		B	B APHB	4TBO856110C0100	1
		C	C APHC	4TBO856111C0100	1
		D	D APHD	4TBO856112C0100	1
		E	E APHE	4TBO856113C0100	1
		F	F APHF	4TBO856114C0100	1
Options table		Back box			
	APO	31-41-71-51	- If hinges are to be installed, the cover and the base or the depth extension frame must be drilled. Drilling templates are provided; the type to be used will obviously depend on the combination selected. - As a result, there is a range of 6 kits comprising 2 hinges, fixing hardware, drilling template, instructions and optional reinforcement plates.		
		81-61-11-12			
Polyester cover	A	A			
Polyester cover + depth extension frame	B	C			
Polycarbonate cover	D	D			
Polycarbonate cover + depth extension frame	E	F			

Product			Pack
Stainless hinges			
	Set of 2 steel hinges (complete with accessories)		
	APHRVS	4TBO851268C0100	1
			
	For installation, the cover must be milled along the dotted line to a depth of 6mm (see diagram).		
Cover screws			
	Cover screws		
	APCS	4TBO851255C0100	50
Clip-in button			
For cover or strip hinge screws			
	Set of 2 pieces		
	APCS2	4TBO851258C0100	1

Product	Type	Order code	Pack
Strip hinges			
	Set of 2 pieces		
	APHS	4TBO851256C0100	1
	Warning: the base must be secured before mounting strip hinges.		
Blanking screws with triangular head (TTR)			
For fixed cover			
	Set of 2 pieces		
	APHSTTR	4TBO851262C0100	1
For pivoting cover			
	Set of 2 pieces		
	APHSTTRD	4TBO852016C0100	1
Wrench			
For triangular head screw (TTR)			
	APTTRK	4TBO851016C0100	1
Sealing plate			
	Set of 2 pieces		
	APSP	4TBO851260C0100	1
Padlock installation kit			
	APPL	4TBO852004C0100	1
	Maximum shackle diameter: 8mm		
Inserts			
	M4 Dodge-type		
	APTIM4	4TBO851026C0100	100
	M6 Dodge-type x 12.5mm		
	APTIM6	4TBO851371C0100	100
	M4 punch		
	APTIM4T	4TBO851027C0100	1
	M6 punch		
	APTIM6T	4TBO852003C0100	1

General purpose enclosures

APO - Functions for modular equipment

Functions for modular equipment

Includes:
- Bare chassis, equipped with a ground terminal and a front plate.
- Securing screws.
- 4 x 30 mm rise pillars.

Type		APO 31	APO 41	APO 71	APO 51	APO 61
						
		302 x 186	302 x 302	372 x 302	488 x 302	603 x 302
		14 modules	14 modules	28 modules	42 modules	42 modules
Type		AP31D141	AP41D141	AP71D282	APACC852283	AP61D423
Order code		4TBO851326C0100	4TBO851336C0100	4TBO851353C0100	4TBO852283C0100	4TBO851345C0100
						
		302 x 186	302 x 302	372 x 302		603 x 302
		14 modules	28 modules	36 modules		56 modules
Type		AP31D142	AP41D282	AP71D362		AP61D564
Order code		4TBO851330C0100	4TBO851338C0100	4TBO851358C0100		4TBO851347C0100

Accessories

Module cover

Length: 72 mm
Cut-out width: 45 mm
Divisible by 9 mm sections

FORSTBP4	4TBR610142C0200	5
FORSTBP500	4TBR610484C0200	500

Product	Type	Order code	Pack
Label holders			
	Adhesive		
	APLB1M	4TBC851321C0100	1m

Connection busbars

6 x 10 mm² + 2 x 16 mm², Clip onto 12 x 2 mm rail



Ground busbar - green		
FORSTTPE	4TBR610186C0200	4
Neutral busbar - blue		
FORSTTN	4TBR610187C0200	1

General purpose enclosures

APO - Stand-alone equipped boxes

Type	APO 31	APO 41	APO 71	APO 61	APO 11
					
Boxes for modular equipment					
Includes: - base with two open sides - with combi cable glands top: 13 x M20/16 bottom: 2 x M32/25 + 3 x M25/20 + 4 x M20/16 - bare chassis, equipped with a ground terminal and a front plate - transparent pivoting cover					
	186 x 302 x 175		372 x 302 x 175	603 x 302 x 175	
	14 modules		28 modules	42 modules	
Type	AP31DIN1		AP71DIN2	AP61DIN3	
Order code	4TBO856119C0100		4TBO856120C0100	4TBO856121C0100	

General purpose enclosures

APO 61 - ⧈ IP44-IK08 distribution enclosures

APO 61

- Made from polyester, self-extinguishing reinforced with glass fiber.
- Meet AREI requirements.
- Equipped with a circuit breaker for circuit protection.
- Also equipped with a 300 mA differential switch for general protection.
- Distribution cabinets are equipped with wall mounting lugs.
- Wired and equipped with a sufficiently sized entry.
- May be coupled to a meter enclosure.
- 3 x 230 V/3 x 400 V+N network inverter.
- Dimensions: 600 x 300 x 175mm

Distribution enclosures with industrial and domestic power outlets

	Equipment	Single-line diagram	Type	Order code
32 A type	1 x 32 A 5P 6h 400 V EEC power outlet 1 x 16 A 5P 6h 400 V EEC power outlet 4 x power outlets with ground braid and child safety function. Inverter 3P+N 400V / 3 x 230 V Protection: 1 Diff-o-Jump type A 4P 40 A 300 mA 1 6 kA 3P+N 25 A Car. C. circuit breaker 1 x 6 kA 3P+N 16 A car. C. circuit breaker 4 x 6kA 2P 16 A car. C circuit breaker		AP61BWK32AH	4TBO890501N2100
63 A type 	1 x 63 A 5P 6h 400 V EEC power outlet 1 x 32 A 5P 6h 400 V EEC power outlet 1 x 16 A 5P 6h 400 V EEC power outlet 4 x power outlets with ground braid and child safety function. Inverter 3P+N 400V / 3 x 230 V Protection: 1 Diff-o-Jump type A 4P 63A 300 mA 1 6 kA 3P+N 50A Car. C. circuit breaker 1 x 6 kA 3P+N 32A car. C. circuit breaker 1 x 6 kA 3P+N 16 A car. C. circuit breaker 4 x 6kA 2P 16 A car. C circuit breaker		AP61BWK63AH	4TBO890502N2100

Distribution enclosures with industrial power outlets

	Equipment	Single-line diagram	Type	Order code
32 A type	1 x 32 A 5P 6h 400 V EEC power outlet 1 x 16 A 5P 6h 400 V EEC power outlet 4 x 16 A 3P 6h 400 V EEC power outlets Inverter 3P+N 400V / 3 x 230 V Protection: 1 Diff-o-Jump type A 4P 40 A 300 mA 1 6 kA 3P+N 25 A Car. C. circuit breaker 1 x 6 kA 3P+N 16 A car. C. circuit breaker 4 x 6kA 2P 16 A car. C circuit breaker		AP61BWK32AIND	4TBO890505N2100

VMS

New milestone in design simplicity and safety of energy distribution systems

Whether you're choosing an energy distribution system for hotel, factory or any other commercial or industrial building, VMS has got you covered.

With its modular and scalable design VMS allows not just to build systems perfectly tailored to specific applications but also to expand your system as your needs change in future.

However VMS isn't just flexible and adaptable - it's also fully tested and safe. When combined with ABB devices, VMS meets the rigorous requirements of IEC 61439-2, giving you and your customers peace of mind.

VMS is available in the form of preassembled kits tailored to house broad range of ABB devices. Within a kit all required components are delivered together with detailed assembly manuals. Install selected ABB device by following simple steps and IEC 61439-2 panelboard is complete!

PDC software will help to ease selection process and create parts lists together with system drawings.

Last but not least VMS enclosures are made from fully recyclable polycarbonate. So when VMS system reaches the end of its life it can be recycled reducing the impact on the environment and preserving natural resources.

Thermoplastic material is **100% recyclable**

Selection and assembly time reduction with the help of PDC software and preassembled kits

High safety level: compliant to IEC 61439-2 and IEC 62208 safety standards

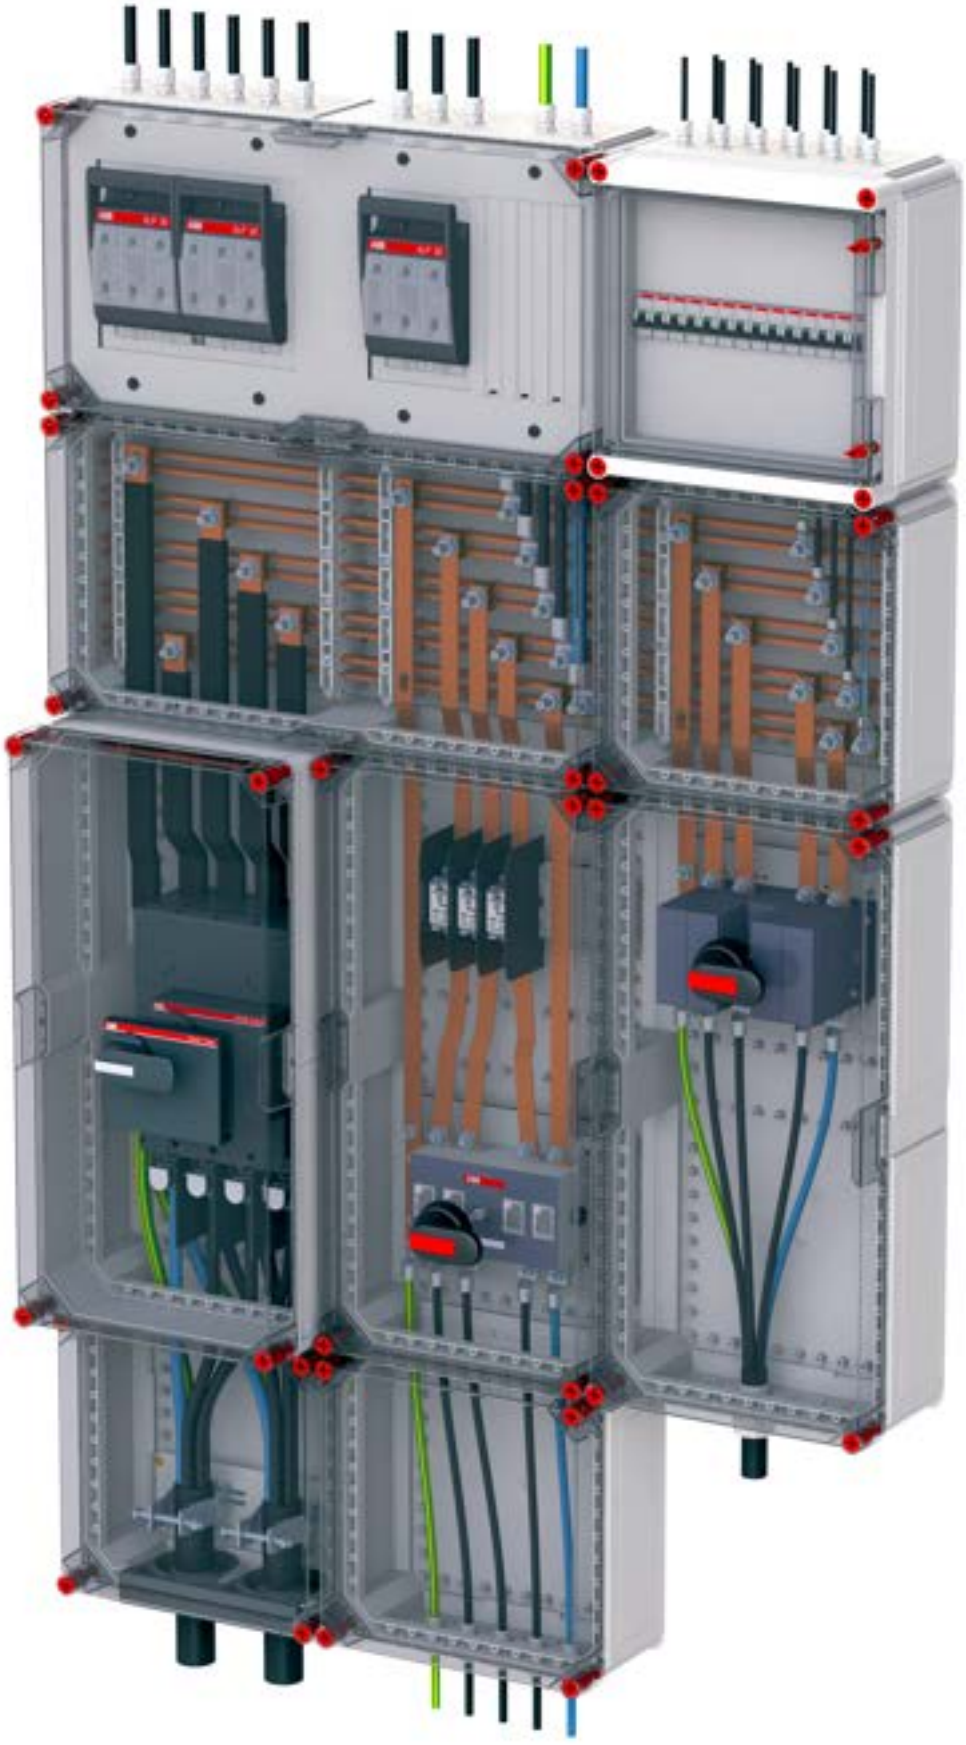

Creating reliable and safe
panelboard has never been easier
than with VMS!

VMS

New milestone in design simplicity and safety of energy distribution systems

Five different sizes can be stacked horizontally and vertically

Predrilled mounting plates and covers with cut-outs for operating handles of devices

Tailored, tested and verified for broad range of ABB devices in accordance with IEC 61439-2 up to 1100 A

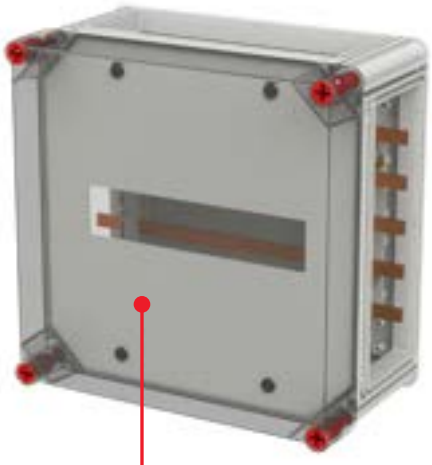

Compliant to IEC62208. IP65 certifies VMS is completely protected against the infiltration of solid bodies and is resistant to the penetration of lowpressure jets of water

Detailed user manuals, busbars connection kits and PDC software significantly simplify design and assembly

100% recyclable and halogenfree material

Simple to meet requirements

Available in 5 sizes that can be oriented either horizontally or vertically and easily connected together to build a system that can be customized to customers specific needs.

Simple to design and assemble

Preassembled VMS kits can be easily selected with the help of this catalogue and PDC software. Furthermore VMS is also enhanced with detailed assembly and user manuals. The instructions in manuals are clear, easy to understand, and include detailed illustrations. All that makes VMS system is one of the easiest to work with, significantly reducing time and effort required for selection and assembly.

Simple to verify

VMS system of enclosures is fully tested together with ABB devices in accordance with IEC 61439-2 by ABB. Hence Assembly Manufacturer is free of performing design verification by testing or calculation.

Simple to scale up

The modular design of VMS allows easily adding extra enclosures as needed. This means customer can start with a small system and expand it if his needs grow over time without having to replace the entire system.

Simple to recycle

VMS enclosures are made of fully recyclable polycarbonate, an environmentally friendly material that can be easily recycled and repurposed. Hence VMS is not only a reliable and efficient energy distribution system, but also a conscious choice to support the environment.

VMS system highlights
Delivery formats

VMS system is available in different formats providing customers with flexibility in manufacturing process and efficiency in usage of warehouse space.

Preassembled VMS boxes in kit format
These kits are prepared to house specific ABB devices (i.e. OT loadbreak switches, XT breakers, DINrail devices, etc.) and all the required items are delivered within a kit. This format is the most easiest way to work with the VMS system as all the required items are delivered together with detailed mounting instructions, pre-drilled mounting plates, covers with cut-outs for operating handles, etc. Such format significantly reduces system assembly time and design verification as soon as all kits were tested in compliance with IEC 61439-2 by DEKRA certified lab. Selection process for kits is also simple. Suitable VMS box can be selected by knowing type of devices, nominal current and quantity with the help of selection tables in the catalogue and PDC software.

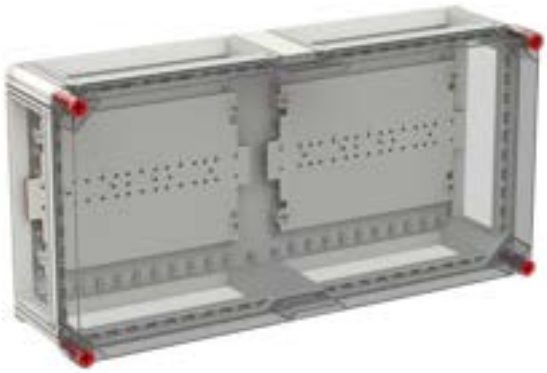

VMS system highlights
Delivery formats

Busbar and cable kits

In order to simplify selection and assembly processes even more VMS provides various busbar and cable connection kits. This kits include perforated, bended and adjusted to correct length copper busbars or cables which can be used for connecting devices to main busbars system (MBB) or with each other.
Drawings for both copper and cable kits are available in ABB Library and can be used by customers to create their own busbar or cable connections.



Individual components

This format allows customers to order individual parts of the VMS system and boxes (base, cover, mounting plate, etc.) separately. Such format provides additional flexibility, extra efficiency in the usage of warehouse space and possibility to order replacement parts.

VMS system highlights

Delivery formats

VMS is supplemented with a set of assembly manuals. They provide detailed information on how to assemble different parts of enclosures, how to connect enclosures together and make connections to main busbar system in order to complete distribution panel. These manuals are designed to be easy to understand and include clear illustrations and diagrams. The user manuals are available in electronic format can be downloaded from ABB Library using QR-codes from the following chapters.

System Manual gives additional information and describes general steps which should be performed during almost any panel assembly and installation: main busbar system assembly, mounting enclosures together, frame mounting, usage of accessories, etc.

Other manuals are available for most frequently used functions: enclosures with OT loadbreak switches, XT breakers, etc.

Example from System Manual

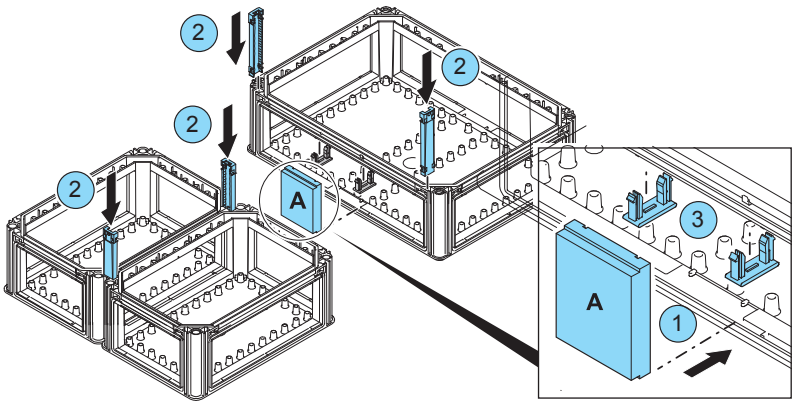

1. Install the coupling bridge (A) in the 440 mm side. The slots indicate the exact location.
2. Couple the bases with the four coupling dowels, insert them simultaneously.
3. Snap the coupling clamps in the openings below the upper base lip.

The IP degree is reduced to IP44.

Example from OT-OS assembly manual

Mounting the anchor bolts (5x)

1. Anchor bolt.
2. Connecting block.
3. Nut / washer.

M10 30-44 Nm

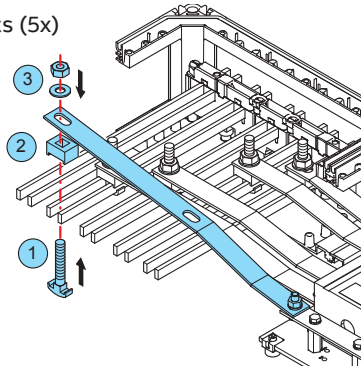

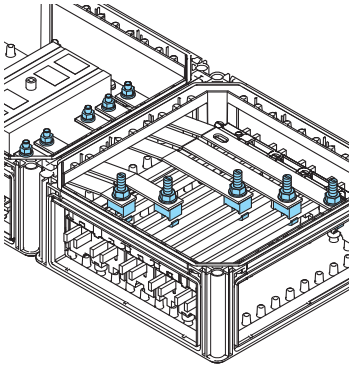

Code to access System Manual:

VMS system highlights

Software tools

VMS is integrated in ABB PDC (Panel Design Configurator) software.

PDC is the easiest way to design a distribution panel by selecting necessary enclosures and attaching them together in working environment thus sizing the system, creating drawing and obtaining parts list at the same moment.

Link to e-design web-page:

Moreover PDC helps to perform some essential checks including coupling kits and end plates automatic selection, has integrated links with assembly manuals and many other functions which help to significantly simplify design process and reduce risk of making mistakes.

PDC is delivered within e-design software package so it should be pre-installed as a first step.

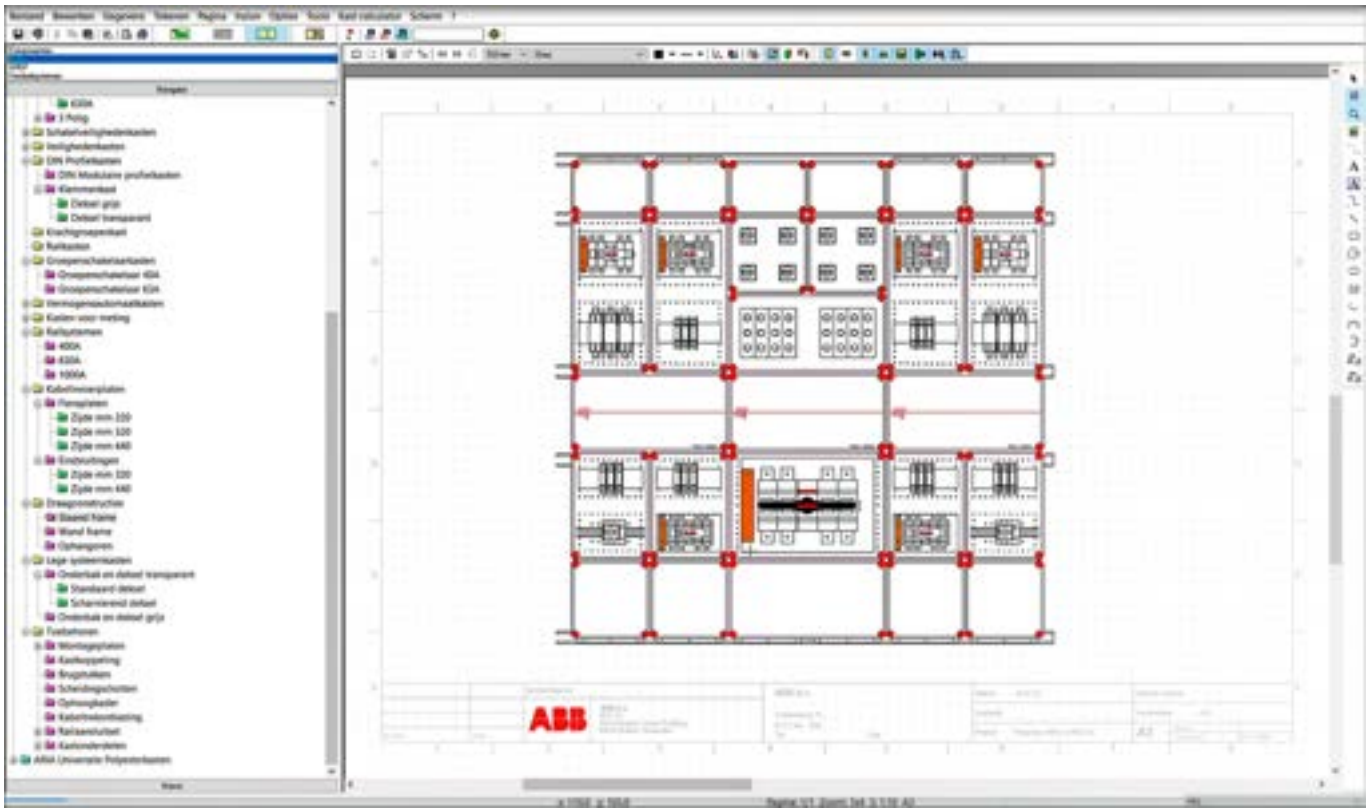

VMS system highlights

Compliance with IEC 61439-2

The IEC 61439-2 standard is a critical requirement for low-voltage switchgear and controlgear assemblies, as it defines the safety, reliability, and performance requirements for such systems. Compliance with this standard is essential for ensuring that a low-voltage energy distribution system is safe and reliable for use in industrial and commercial settings.

The standard describes three design verification processes for ASSEMBLIES and requires a routine verification for every marketed product.

Testing	Calculation / measurement	Application of constructive rules
such as • electrical • mechanical • thermal tests in accordance with the requirements specified in the standard	such as • calculating of temperature rises or of short-circuit forces • measurement of clearances and creepage distances	such as • pecified dimensions • test steps • ASSEMBLY sequences based on tested reference designs

These processes are essentially implemented by the original manufacturer. In case that the ASSEMBLY manufacturer does not install an ASSEMBLY in compliance with the instructions of the original manufacturer, the ASSEMBLY manufacturer will become original manufacturer for that alteration and will have to carry out the design verification in accordance with the described procedures.

IEC 61439

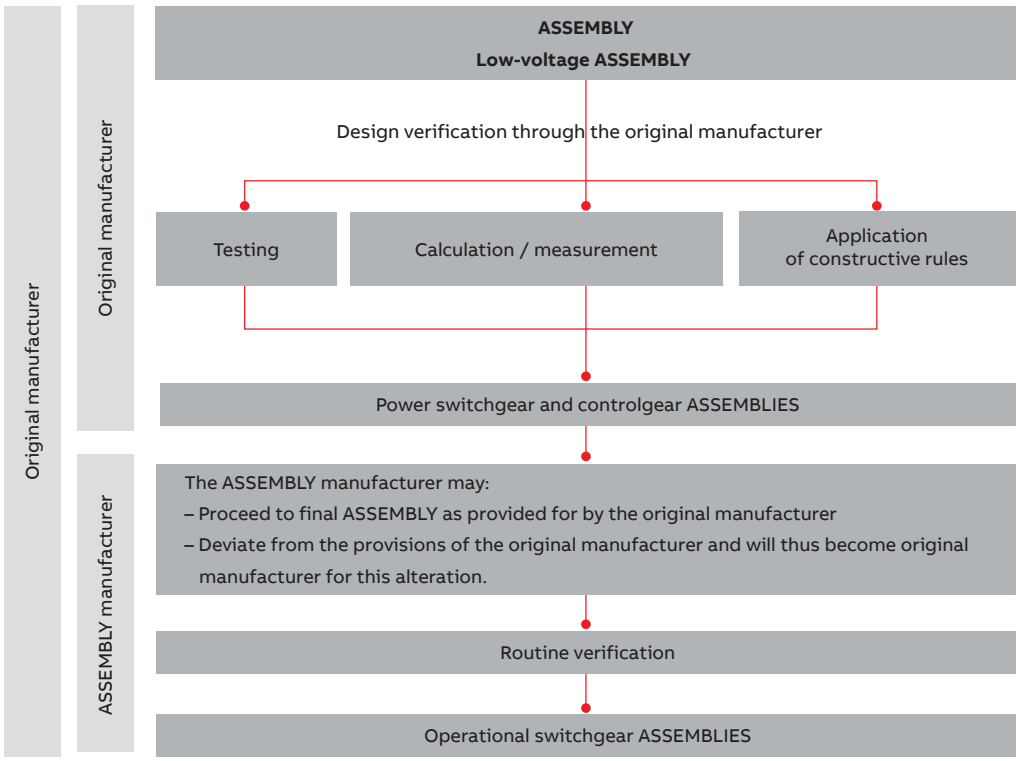

VMS system highlights

Compliance with IEC 61439-2

VMS was fully tested together with ABB devices in accordance with IEC 61439-2 by DEKRA certified laboratory.

It means that by applying VMS system Assembly Manufacturer (panelbuilder or installer) is free of carrying out design verification by testing and/or calculation if constructed system is designed and assembled in line with ABB user manuals and doesn't deviate from verified designs.

Hence by using VMS panelbuilders are not just providing their customers with a fully reliable and safe solution that meets the highest industry standards but also significantly reducing their time, efforts and costs by freeing themselves from responsibility of design verification.

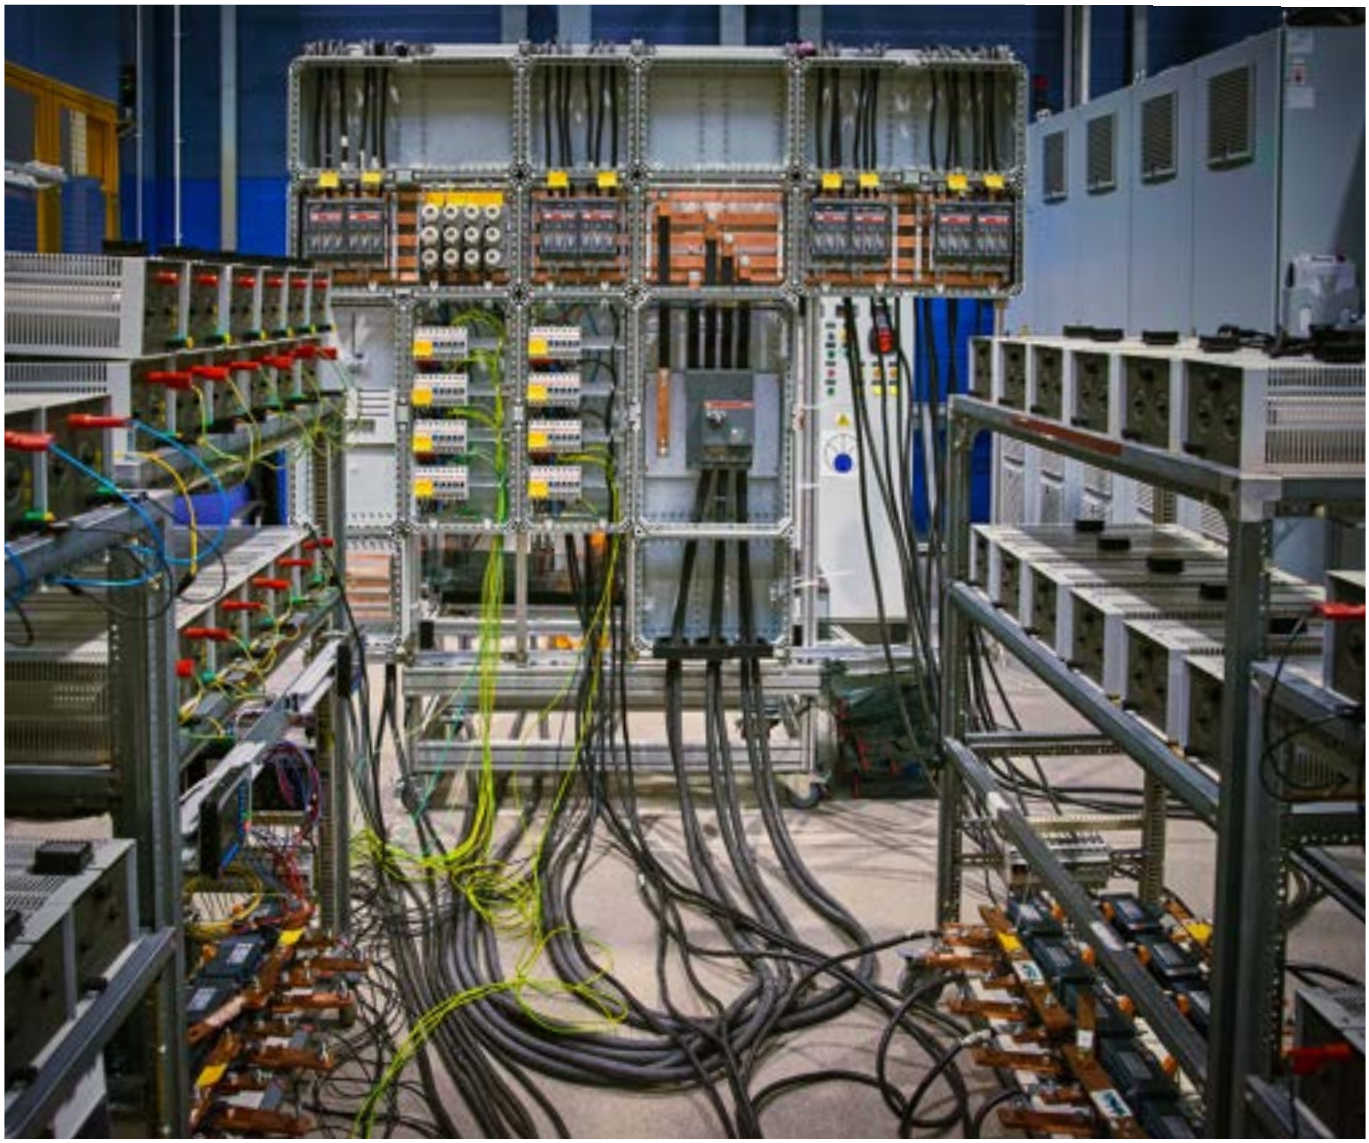

VMS system highlights

Technical data

Degree of protection according to IEC 60529	
individual and coupled	IP65
with coupling set 2 x 220	IP44
with extension frame	IP65
with double extension frame	IP43
with cable entries	IP43
with bridges	IP55
Protection degree against external mechanical impacts according to EN 62262 and IEC 62262	
base + end plates + covers	IK08
hinged cover	IK06
Materials	
base + end-plates	Reinforced fiber-glass polycarbonate
covers	Polycarbonate
cover screws	Polyamide
gasket	PUR, neoprene
Temperature resistance	
Resistance to abnormal heat and fire (GWT)	960 °C for parts having direct contact with bare conductors (i.e. busbar supports and back box) / 650 °C for other parts
continuous use	-20 °C up to +80 °C
Colours	
base + end-plates	RAL 7035
covers	RAL 7035 / transparent
Protection	Double isolation ⧈
Rated voltage	415 V AC
Rated insulation voltage	1000 V AC
Rated current	max. 1100 A
Rated short time withstand current	max. 30 kA (1.0 s.)
Rated peak short-circuit current	max. 63 kA peak
Standards	EN 61439-2, IEC 61439-2

VMS system highlights

Modularity explained

- The range comprises five base dimensions, multiples of the 100 mm module.
- Each large base is a multiple of smaller bases. Securing points for mounting rails, plates, busbar holders, etc. are arranged by 25 mm increments, at the top, bottom and middle of the base.
- Each base can be oriented either vertically or horizontally and connected to the side of adjacent enclosure with matching dimension.

VMS - Range overview

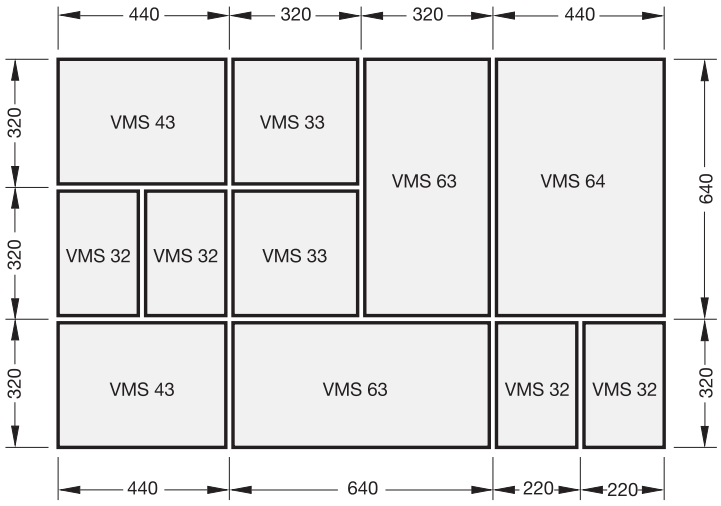

VMS - Range overview

IP65 VMS (modular)				
				
320×220×179 mm	320×320×179 mm	440×320×179 mm	640×320×179 mm	640×440×179 mm
VMS 32	**VMS 33**	**VMS 43**	**VMS 63**	**VMS 64**

Dimensions for fixing points, VMS43 base with horizontal orientation is used in this example:

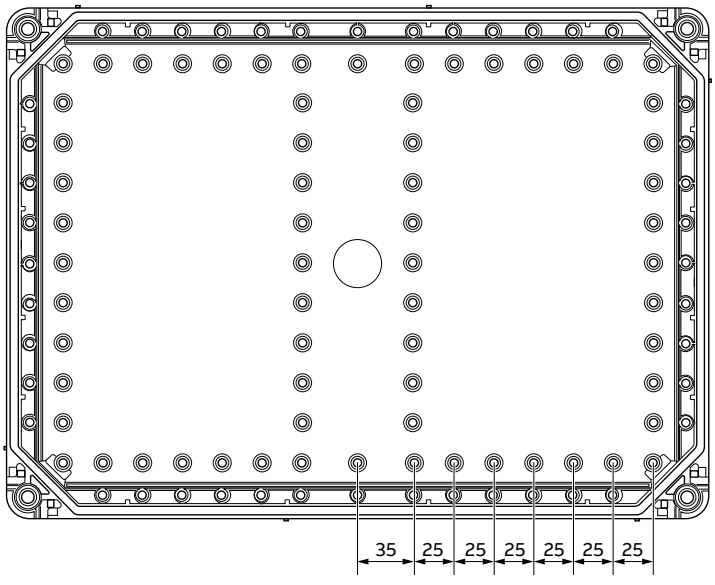

VMS system highlights

Basic components overview

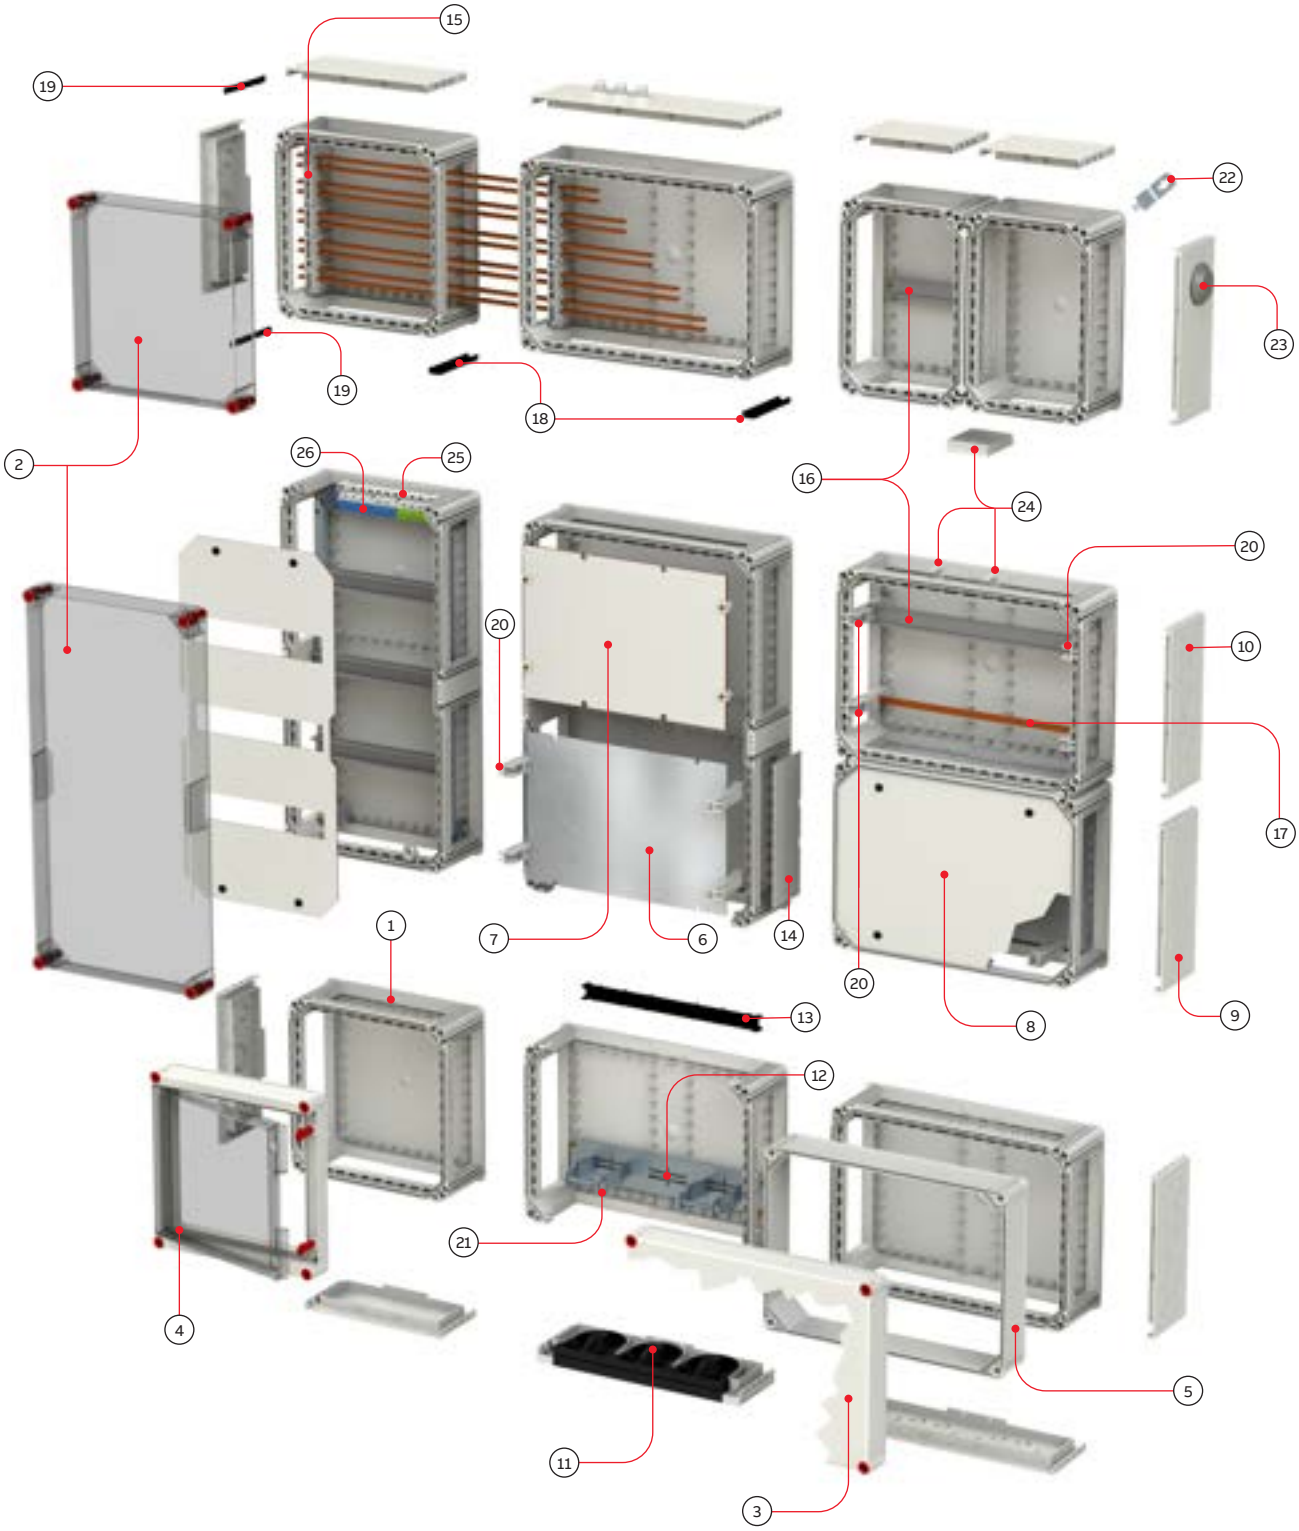

1. Base
2. Transparent cover
3. Opaque cover
4. Pivoting cover
5. Depth extension frame
6. Mounting plate: metal
7. Mounting plate: pertinax
8. Solid cover panel
9. End plate
10. End plate with punch-out
11. End plate with cable entry
12. Cable grip support
13. Bridge
14. Partition plate
15. Busbar support
16. DIN rail
17. Busbar rail 12×2 mm
18. Coupling dowels
19. Locking pin (for end plates)
20. Universal support
21. Stress-relieving cable clamp
22. Mounting brackets
23. Air vent
24. Coupling set 2×220 mm
25. Terminal carrier
26. Terminal block

VMS system highlights
Assembly highlights

Modular dimensions in increments of 100mm in height and width, available in five sizes:
320×220 mm 320×320 mm
440×320 mm 640×320 mm
640×440 mm

Assorted covers: transparent, opaque, or hinged; common design and depth.

Quick coupling thanks to the coupling dowels inserted into the four corner slots of the boxes.

End plates are snapped on from the outside and fixed by means of vertically sunk keys at the front of the base.

After installation, the end-plates fit perfectly into the side panels of the base.

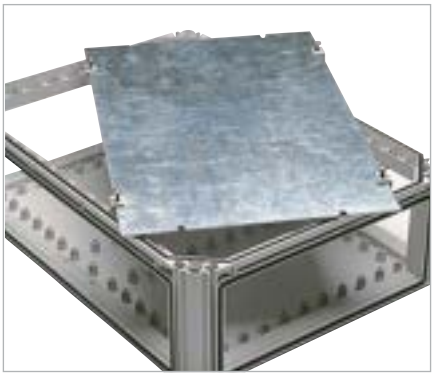

Mounting plates (2 mm in metal or 5 mm in insulating material pertinax), with mounting accessories.

Universal support for screwless and depth adjustable installation of DIN rails. This universal support is simply clicked over the base.

Removable bridges facilitate the introduction of large-section cables. After connecting the cables, insert the bridges (320 and 440 mm sides).

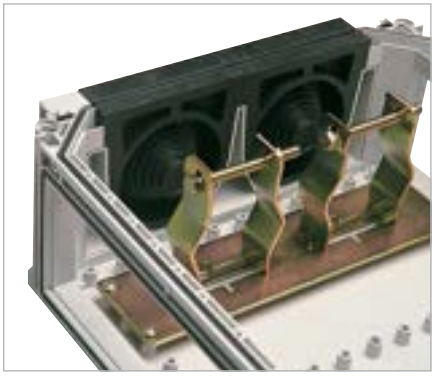

Universal cable entries and stress-relieving cable clamps to Ø 75 mm are attached to all base on side 320 mm (for 2 cables) and side 440 mm (for 3 cables).

VMS system highlights
Assembly highlights

Vertical and horizontal stacking of enclosures
Enclosures are assembled using dowel pins mounted on the front end.
The dowel pins are universal for the entire range of VMS enclosures.

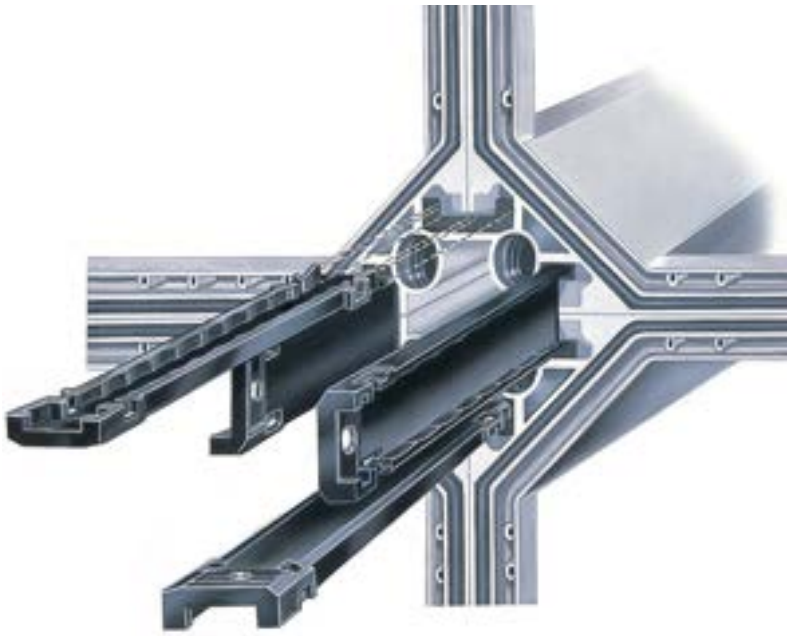

Installation of end plates
After insertion from outside, the end plate is locked in position by two dowel pins and pressed against the enclosure body join.

Notes

VMS kits

General purpose boxes

4TBV853369C0100

4TBV853370C0100

Without mounting plate

- Base with four open sides without end plates
- Without mounting plates and DIN-rails
- With transparent or opaque cover

Description	External dimensions (HxWxD, mm)	Type code	Order code	Pack, pcs.
VMS 32 empty box with transparent cover	320 x 220 x 179	VF32HT-N	4TBV853347C0100	1
VMS 32 empty box with opaque cover	320 x 220 x 179	VF32HO-N	4TBV853348C0100	1
VMS 33 empty box with transparent cover	320 x 320 x 179	VF33HT-N	4TBV853349C0100	1
VMS 33 empty box with opaque cover	320 x 320 x 179	VF33HO-N	4TBV853350C0100	1
VMS 43 empty box with transparent cover	440 x 320 x 179	VF43HT-N	4TBV853355C0100	1
VMS 43 empty box with opaque cover	440 x 320 x 179	VF43HO-N	4TBV853356C0100	1
VMS 63 empty box with transparent cover	640 x 320 x 179	VF63HT-N	4TBV853369C0100	1
VMS 63 empty box with opaque cover	640 x 320 x 179	VF63HO-N	4TBV853370C0100	1
VMS 64 empty box with transparent cover	640 x 440 x 179	VF64HT-N	4TBV853373C0100	1
VMS 64 empty box with opaque cover	640 x 440 x 179	VF64HO-N	4TBV853374C0100	1

4TBV853381C0100

With mounting plate

- Base with four open sides without end plates
- PERTINAX mounting plate 5 mm
- Transparent cover

Description	External dimensions (HxWxD, mm)	Type code	Order code	Pack, pcs.
VMS 32 box with mounting plate and transparent cover	320 x 220 x 179	VF32HT	4TBV853375C0100	1
VMS 33 box with mounting plate and transparent cover	320 x 320 x 179	VF33HT	4TBV853379C0100	1
VMS 43 box with mounting plate and transparent cover	440 x 320 x 179	VF43HT	4TBV853380C0100	1
VMS 63 box with mounting plate and transparent cover	640 x 320 x 179	VF63HT	4TBV853381C0100	1
VMS 64 box with mounting plate and transparent cover	640 x 440 x 179	VF64HT	4TBV853382C0100	1

VMS kits

Boxes for DIN-rail devices

4TBV854351C0100

4TBV854352C0100

For DIN-rail devices with 125 row distance

- Base with four open sides without end plates
- DIN-rails 35x15
- Row distance 125 mm
- Protective plate with cut-outs for DIN-rail devices
- Transparent cover
- PE/N Terminals are not included

Description	External dimensions (HxWxD, mm)	Modules	Rows	Type code	Order code	Pack, pcs.
VMS32H 1xDIN-rail (14 mod)	220 x 320 x 179	14	1	VB32HT-D	4TBV854347C0100	1
VMS33H 2xDIN-rails 125mm (28 mod)	320 x 320 x 179	28	2	VB33HT-D2	4TBV854348C0100	1
VMS43V 3xDIN-rails 125mm (42 mod)	440 x 320 x 179	42	3	VB43VT-D3	4TBV854349C0100	1
VMS43H 2xDIN-rails 125mm (40 mod)	320 x 440 x 179	40	2	VB43HT-D2	4TBV854350C0100	1
VMS63V 4xDIN-rails 125mm (56 mod)	640 x 320 x 179	56	4	VB63VT-D4	4TBV854351C0100	1
VMS64V 4xDIN-rails 125mm (80 mod)	640 x 440 x 179	80	4	VB64VT-D4	4TBV854352C0100	1
VMS63H (2+2)xDIN-rails 125mm (56 mod)	320 x 640 x 179	56	2x2	VB63HT-D22	4TBV854353C0100	1

4TBV853853C0100

4TBV853854C0100

For DIN-rail devices with 150 row distance

- Base with four open sides without end plates
- DIN-rails 35x15
- Row distance 150 mm
- Protective plate with cut-outs for DIN-rail devices
- Transparent pivoting door in 4TBV853851C0100 and 4TBV853853C0100
- Transparent cover attached with screws in 4TBV853854C0100
- PE/N Terminals are not included

Description	External dimensions (HxWxD, mm)	Modules	Rows	Type code	Order code	Pack, pcs.
VMS33H 1xDIN-rail 14 mod pivot door	320 x 320 x 179	14	1	VB33HP-D	4TBV853851C0100	1
VMS43V 2xDIN-rail 150mm 28mod pivot door	440 x 320 x 179	28	2	VB43VP-DX2	4TBV853853C0100	1
VMS63V 3xDIN-rail 150mm 42mod tr. cover	640 x 320 x 179	42	3	VB63VT-DX3	4TBV853854C0100	1

4TBV854207C0100

Terminal carrier

- For mounting plug-in terminals (next page)
- Size: 11 terminal units

Description	Size, terminal units	Type code	Order code	Pack, pcs.
Terminal carrier for DIN-rail boxes	11	VA-TC11	4TBV854207C0100	1

VMS kits

Terminal for DIN-rail boxes

ZKS11B

ZKS11G

SCREW – Terminal blocks

Article	Number terminals 1.5 x 6 mm²	Number terminals 1.5 x 16 mm²	Maximum rated current [A]	Packaging pack/bulk	Type code	Order code
N screw-terminals For terminal carriers	3 x 6	3 x 16	100	1 5/270	ZKS6B 41Z57	2CPX063167R9999 1SPE007715F0731
	6 x 6	5 x 16	100	1 5/150	ZKS11B 41Z58	2CPX063168R9999 1SPE007715F0732
	9 x 6	7 x 16	100	1 5/120	ZKS16B 41Z59	2CPX063169R9999 1SPE007715F0733
	12 x 6	9 x 16	100	1 5/90	ZKS21B 41Z60	2CPX063170R9999 1SPE007715F0734
	15 x 6	11 x 16	100	1 5/90	ZKS26B 41Z61	2CPX063171R9999 1SPE007715F0735
PE screw-terminals For terminal carriers	3 x 6	3 x 16	100	1 5/270	ZKS6G 41Z62	2CPX063172R9999 1SPE007715F0741
	6 x 6	5 x 16	100	1 5/150	ZKS11G 41Z63	2CPX063173R9999 1SPE007715F0742
	9 x 6	7 x 16	100	1 5/120	ZKS16G 41Z64	2CPX063174R9999 1SPE007715F0743
	12 x 6	9 x 16	100	1 5/90	ZKS21G 41Z65	2CPX063175R9999 1SPE007715F0744
	15 x 6	11 x 16	100	1 5/90	ZKS26G 41Z66	2CPX063176R9999 1SPE007715F0745

ZK51B

ZK51G

QUICK PLUG – Terminal blocks screwless

N quick-plug terminals For terminal carriers	5 x 1.5 - 4	0 x 25	63	1 5/280	ZK50B 41Z70	2CPX062750R9999 1SPE007715F9701
	5 x 1.5 - 4	1 x 25	63	1 5/180	ZK51B 41Z71	2CPX062751R9999 1SPE007715F9702
	8 x 1.5 - 4	2 x 25	63	1 5/150	ZK82B 41Z72	2CPX062752R9999 1SPE007715F9703
	11 x 1.5 - 4	3 x 25	63	1 5/100	ZK113B 41Z73	2CPX062753R9999 1SPE007715F9704
	14 x 1.5 - 4	4 x 25	63	1 5/90	ZK144B 41Z74	2CPX062754R9999 1SPE007715F9705
	14 x 1.5 - 4	5 x 25	63	1 5/70	ZK175B 41Z75	2CPX062755R9999 1SPE007715F9706
	20 x 1.5 - 4	6 x 25	63	1 5/60	ZK206B 41Z76	2CPX062756R9999 1SPE007715F9707
	23 x 1.5 - 4	7 x 25	63	1 5	ZK237B 41Z150	2CPX063163R9999 1SPE007715F9708
	26 x 1.5 - 4	8 x 25	63	1 5	ZK268B 41Z151	2CPX063164R9999 1SPE007715F9709
N quick-plug terminals	5 x 1.5 - 4	0 x 25	63	1	ZK50BT	2CPX062745R9999
PE quick-plug terminals For terminal carriers	5 x 1.5 - 4	1 x 25	63	1 5/180	ZK51G 41Z77	2CPX062757R9999 1SPE007715F9712
	8 x 1.5 - 4	2 x 25	63	1 5/150	ZK82G 41Z78	2CPX062758R9999 1SPE007715F9713
	11 x 1.5 - 4	3 x 25	63	1 5/100	ZK113G 41Z79	2CPX062759R9999 1SPE007715F9714
	14 x 1.5 - 4	4 x 25	63	1 5/90	ZK144G 41Z80	2CPX062760R9999 1SPE007715F9715
	17 x 1.5 - 4	5 x 25	63	1 5/70	ZK175G 41Z81	2CPX062761R9999 1SPE007715F9716
	20 x 1.5 - 4	6 x 25	63	1 1 5/60	ZK206G 41Z82	2CPX062762R9999 1SPE007715F9717
	23 x 1.5 - 4	7 x 25	63	1 5	ZK237G 41Z152	2CPX063165R9999 1SPE007715F9718
	26 x 1.5 - 4	8 x 25	63	1 5	ZK268G 41Z153	2CPX063166R9999 1SPE007715F9719

VMS kits

Terminal for DIN-rail boxes

Terminal blocks

N/PE terminals with units	N screw-terminals	Type code	Screw connection system		PE screw-terminals	Type code	Screw connection system	
		ZKS6B 41Z57	3 x 6 mm²	3 x 16 mm²		ZKS6G 41Z62	3 x 6 mm²	3 x 16 mm²
		ZKS11B 41Z58	5 x 6 mm²	5 x 16 mm²		ZKS11G 41Z63	5 x 6 mm²	5 x 16 mm²
		ZKS16B 41Z59	9 x 6 mm²	7 x 16 mm²		ZKS11G 41Z63	9 x 6 mm²	7 x 16 mm²
		ZKS21B 41Z60	12 x 6 mm²	9 x 16 mm²		ZKS21G 41Z65	12 x 6 mm²	9 x 16 mm²
		ZKS26B 41Z61	15 x 6 mm²	11 x 16 mm²		ZKS26G 41Z66	15 x 6 mm²	11 x 16 mm²

Terminal blocks screwless

		ZK50B 41Z70 ZK50BT	0 x 25 mm²	5 x 1,5 - 4 mm²	-		-	-
		ZK51B 41Z71	1 x 25 mm²	5 x 1,5 - 4 mm²		ZK51G 41Z77	1 x 25 mm²	5 x 1,5 - 4 mm²
		ZK82B 41Z72	2 x 25 mm²	8 x 1,5 - 4 mm²		ZK82G 41Z78	2 x 25 mm²	8 x 1,5 - 4 mm²
		ZK113B 41Z73	3 x 25 mm²	11 x 1,5 - 4 mm²		ZK113G 41Z79	3 x 25 mm²	11 x 1,5 - 4 mm²
		ZK144B 41Z74	4 x 25 mm²	14 x 1,5 - 4 mm²		ZK144G 41Z80	4 x 25 mm²	14 x 1,5 - 4 mm²
		ZK175B 41Z75	5 x 25 mm²	17 x 1,5 - 4 mm²		ZK175G 41Z81	5 x 25 mm²	17 x 1,5 - 4 mm²
		ZK206B 41Z76	6 x 25 mm²	20 x 1,5 - 4 mm²		ZK206G 41Z82	6 x 25 mm²	20 x 1,5 - 4 mm²
		ZK237B 41Z150	7 x 25 mm²	23 x 1,5 - 4 mm²		ZK237G 41Z152	7 x 25 mm²	23 x 1,5 - 4 mm²
		ZK268B 41Z151	8 x 25 mm²	26 x 1,5 - 4 mm²		ZK268G 41Z153	8 x 25 mm²	26 x 1,5 - 4 mm²

VMS kits

Boxes for OT/OS installed on DIN-rail

4TBV853445C0100

4TBV853519C0100

For load break switches OT 16-125A mounted on DIN-rail

- For 3-pole or 4-pole
- Base with four open sides without end plates
- DIN-rail 35 x 7.3 mm
- Transparent cover with cut-out for handle shaft
- PE/N Terminals are not included

Additional info can be found in User Manual:

4TBV853528C0100

Description	External dimensions (HxWxD, mm)	Device type	Qty devices*	Max device current, A	Compatible OT handlecode/type	Type code	Order code	Pack, pcs.
VMS32V for OT16F - OT125F DIN RAIL	320 x 220 x 179	OT16-125	1	125	1SCA022380R8770 OHB45J6	VB32VT-S125/4	4TBV853445C0100	1
VMS32H for 2x OT40F - OT63F DIN RAIL	220 x 320 x 179	OT40-63	2	63	1SCA105232R1001 OHBS2RJ	VB32HT-S2x63/4	4TBV853519C0100	1
VMS32V for 2x OT40F - OT63F DIN RAIL	320 x 220 x 179	OT40-63	2	63	1SCA105232R1001 OHBS2RJ	VB32VT-S2x63/4	4TBV853521C0100	1
VMS33 for 4x OT40F - OT63F DIN RAIL	320 x 320 x 179	OT40-63	4	63	1SCA105232R1001 OHBS2RJ	VB33HT-S4x63/4	4TBV853528C0100	1
VMS33 for 5x OT40F DIN RAIL	320 x 320 x 179	OT40	5	40	1SCA105232R1001 OHBS2RJ	VB33HT-S5x40/4	4TBV853530C0100	1
VMS32H for 1x OT16F - OT125F**	220 x 320 x 179	OT16-125	1	125	1SCA022380R8770 OHB45J6	VB32HT-C125/4	4TBV853425C0100	1
VMS33 for 1x OT16F - OT125F**	320 x 320 x 179	OT16-125	1	125	1SCA022380R8770 OHB45J6	VB33HT-C125/4	4TBV853426C0100	1

* By determining quantity of devices per enclosure use RDF values from table 101 of IEC 61439-2
** The same enclosure can be used for changeover system

VMS kits

Boxes for OT/OS changeover systems

4TBV853425C0100

4TBV853429C0100

For changeover systems

- For 3-pole or 4-pole
- Base with four open sides without end plates
- DIN-rail 35 x 7.3 mm or pre-drilled mounting plate
- Transparent cover with cut-out for 1 handle shaft
- PE/N Terminals are not included
- Change-over switch mechanism is not included*
- Please select matching change-over switch mechanism from catalogue: Switches, Switch-disconnectors OT and OTM. Catalogue OT8GB 07-07. ID number 1SCC301020C0201

Description	External dimensions (HxWxD, mm)	Device type	Qty devices*	Max device current	Mounting surface	Compatible OT handlecode/ type	Type code	Order code	Pack, pcs.
VMS 32H for changeover system: 2x OT16F - OT125F	220 x 320 x 179	OT	2	125	DIN-rail	1SCA022817R2130 OHB45J6E311	VB32HT-C125/4	4TBV853425C0100	1
VMS 33 for changeover system: 2x OT16F - OT125F	320 x 320 x 179	OT	2	125	DIN-rail	1SCA022817R2130 OHB45J6E311	VB33HT-C125/4	4TBV853426C0100	1
VMS 63H for changeover system: 2x OT160-250 or 2x OS100-160	320 x 640 x 179	OT/OS	2	250/160	mounting plate	handle is included in change-over switch mechanism	VB63HT-C250/4	4TBV853429C0100	1

* Please select matching change-over switch mechanism from catalogue: Switches, Switch-disconnectors OT and OTM. Catalogue OT8GB 07-07. ID number 1SCC301020C0201

Terminals for 4TBV853429C0100

	Description	Nominal current, A	Device type	Type code	Order code	Pack, pcs.
4TBV853681C0100	VMS TERMINAL OT / XT 160A	160	OT160	VTM160	4TBV853681C0100	1
4TBV853682C0100	VMS TERMINAL OT / XT 250A	250	2xOT250	VTM250	4TBV853682C0100	1
4TBV853216C0100	VMS N feed-through terminal 160A, connection via CLAMP	160	2xOS100	VTM160FT-C	4TBV853216C0100	1
4TBV853700C0100	VMS N feed-through terminal 160A, connection via BOLT	160	2xOS160	VTM160FT-B	4TBV853700C0100	1

VMS kits

Boxes for OT/OS installed on mounting plate

4TBV853446C0100

4TBV853471C0100

4TBV853490C0100

For load break switches OT 160-1250 or OS32-400 installed on mounting plate

- For 3-pole or 4-pole (configurations 12, 22)
- Base with four open sides without end plates
- PERTINAX mounting plates 5 mm
- Plates are pre-drilled and marked for correct positioning of devices
- With extension frame for OS installation
- Transparent cover with cut-out for handle shaft
- PE/N Terminals are not included (use selection table next page)

The use of supports against short circuit current dynamic stress is mandatory in installation with OT630-OT1250.
The use of extra box for cable management and cable connection sets is always recommended in installation with OT1000-OT1250.
Refer to the following pages for selection

Configuration of compatible OT/OS:

Front operated
Configuration 12, 22:





Additional info can be found in User Manual:

Description	External dimensions (HxWxD, mm)	Device type	Qty devices*	Max device current, A	Compatible OT handlecode/type	Type code	Order code	Pack, pcs.
VMS33 for OT160-250 / OS32-63 / OS100-160	320 x 320 x 179	OT/OS	1	250/160	1SCA022380R9660 OHB65J6	VB33HT-S250/4	4TBV853446C0100	1
VMS43V for OT160-250/ OS100-160	440 x 320 x 179	OT/OS	1	250/160	1SCA022380R9660 OHB65J6	VB43VT-S250/4	4TBV853447C0100	1
VMS63V for OT160-250 / OS100-160	640 x 320 x 179	OT/OS	1	250/160	1SCA022380R9660 OHB65J6	VB63VT-S250/4	4TBV853450C0100	1
VMS64V for OS200-250	640 x 440 x 179	OS	1	250	1SCA022380R9660 OHB65J6	VB64VT-F250/4	4TBV853451C0100	1
VMS64V for OT315-400	640 x 440 x 179	OT	1	400	1SCA022381R0830 OHB95J12	VB64VT-S400/4	4TBV853452C0100	1
VMS64V for OS315-400 BOT 4p / TOP 3p*	640 x 440 x 179	OS	1	400	1SCA022381R0830 OHB95J12	VB64VT-F400/4B	4TBV853471C0100	1
VMS64V for OS315-400 TOP 4p / BOT 3p*	640 x 440 x 179	OS	1	400	1SCA022381R0830 OHB95J12	VB64VT-F400/4T	4TBV853472C0100	1
VMS64V for OT 630-800 BOT 4p / TOP 3p*	640 x 440 x 179	OT	1	800	1SCA022381R1560 OHB125J12	VB64VT-S800/4B	4TBV853473C0100	1
VMS64V for OT 630-800 TOP 4p / BOT 3p*	640 x 440 x 179	OT	1	800	1SCA022381R1560 OHB125J12	VB64VT-S800/4T	4TBV853474C0100	1
VMS64H for OT1000-1250	640 x 440 x 254	OT	1	1100	1SCA022865R9430 OHB150J12P	VB64HT-S1250/4	4TBV853490C0100	1

* BOT: device is positioned in the lower part of enclosure, main busbar system (MBB) is located below enclosure; 3p/4p - quantity of device poles
* TOP: device is positioned in the upper part of enclosure, main busbar system (MBB) is located above enclosure; 3p/4p - quantity of device poles

VMS kits

Boxes for OT/OS installed on mounting plate

Terminals

	Device type	Enclosure order code	Order code	Description	Type code	Nominal current, A	Pack, pcs.
4TBV853681C0100	OT / XT 160	4TBV853446C0100 4TBV853447C0100 4TBV853450C0100	4TBV853681C0100	VMS TERMINAL OT / XT 160A	VTM160	160	1
4TBV853682C0100	OT / XT 200 OT / XT 250	4TBV853446C0100 4TBV853447C0100 4TBV853450C0100	4TBV853682C0100	VMS TERMINAL OT / XT 250A	VTM250	250	1
4TBV853683C0100	OT / XT 315 OT / XT 400	4TBV853452C0100	4TBV853683C0100	VMS TERMINAL OT / XT 400A	VTM400	400	1
4TBV853684C0100	OT / XT 630	4TBV853473C0100 4TBV853474C0100	4TBV853684C0100	VMS TERMINAL OT / XT 630A for 50% PE/N	VTM630-50	400	1
4TBV853685C0100	OT / XT 630	4TBV853473C0100 4TBV853474C0100	4TBV853685C0100	VMS TERMINAL OT / XT 630A	VTM630	630	1
4TBV853686C0100	OT / XT 800	4TBV853473C0100 4TBV853474C0100	4TBV853686C0100	VMS TERMINAL OT / XT 800A for 50% PE/N	VTM800-50	400	1
4TBV853687C0100	OT / XT 800	4TBV853473C0100 4TBV853474C0100	4TBV853687C0100	VMS TERMINAL OT / XT 800A	VTM800	800	1
4TBV853688C0100	OT / XT 1000	4TBV853473C0100 4TBV853474C0100	4TBV853688C0100	VMS TERMINAL OT / XT 1000A for 50% PE/N	VTM1000-50	500	1
4TBV853689C0100	OT / XT 1000	4TBV853473C0100 4TBV853474C0100	4TBV853689C0100	VMS TERMINAL OT / XT 1000A	VTM1000	1000	1
4TBV853690C0100	OT / XT 1250	4TBV853490C0100	4TBV853690C0100	VMS TERMINAL OT / XT 1250A	VTM1250	1250	1

VMS kits

Boxes for OT/OS installed on mounting plate

	Device type	Enclosure order code	Order code	Description	Type code	Nominal current, A	Pack, pcs.
4TBV853691C0100	OS32-63	4TBV853446C0100	4TBV853691C0100	VMS N feed-through terminal 63A	VTM63FT	63	1
4TBV853216C0100	OS100-160	4TBV853446C0100 4TBV853447C0100 4TBV853450C0100	4TBV853216C0100	VMS N feed-through terminal 160A CLAMP	VTM160FT-C	160	1
4TBV853700C0100	OS100-160	4TBV853446C0100 4TBV853447C0100 4TBV853450C0100	4TBV853700C0100	VMS N feed-through terminal 160A BOLT	VTM160FT-B	160	1
4TBV853217C0100	OS200-250	4TBV853451C0100	4TBV853217C0100	VMS N feed-through terminal 250A length 200mm	VTM250FT-BL	250	1
4TBV853218C0100	OS315-400	4TBV853471C0100 4TBV853472C0100	4TBV853218C0100	VMS N feed-through terminal 630A length 200mm	VTM630FT-B	630	

4TBV854356C0100

OT Busbars support against short-circuit dynamic stress

- **Must be used toghether with OT630 - OT1250**
- Mounted to phase busbars
- Installation material (bolts, nuts) is included

Description	Device type	Type code	Order code	Pack, pcs.
VMS Short circuit support for OT630-800	OT630 OT800	VA-TS-OT800	4TBV854355C0100	1
VMS Short circuit support OT1000-1250	OT1000 OT1250	VA-TS-OT1250	4TBV854356C0100	1

VMS kits

Boxes for OT/OS installed on mounting plate

4TBV854202C0100

4TBV854203C0100

OT1000-1250 cable connection kit

- Kit is used to connect incoming cables (feeders) to OT terminals
- Installation material (bolts, nuts) is included

Description	Device type	Type code	Order code	Pack, pcs.
1 pole terminal kit for cable connection OT1000-1250	OT1000-1250	VA-TK-OT1250	4TBV854202C0100	1
OT cable terminals short-circuit support	OT1000-1250	VA-TC-OT1250	4TBV854203C0100	1

VMS kits

Connecting busbars for OT/OS

4TBV853824C0100

4TBV853825C0100

4TBV853826C0100

4TBV853827C0100

Device type	Enclosure order code	VMS box type	Type of network	Busbar kit application	MBB position*	Busbar kit order code
OT160	4TBV853446C0100 4TBV853450C0100	VMS33/63V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853805C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853806C0100**
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853807C0100**
OT160	4TBV853447C0100	VMS43	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853808C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853809C0100**
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853810C0100**
OT200 OT250	4TBV853446C0100 4TBV853450C0100	VMS33/VMS63V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853814C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853815C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853816C0100
OT200 OT250	4TBV853447C0100	VMS43V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853817C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853819C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853820C0100
OT400	4TBV853452C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853821C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853822C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853823C0100

* Position of Main Busbars (MBB) relative to selected enclosure
Check following pages for illustrative guide

** The same busbar kit is also used for connecting box with OS160 (see table below)

4TBV853829C0100

For load break switches OT 160-1250 / OS 160-400

(Kits are applicable only to parallel busbar systems)

- Connection of incoming/outgoing OT/OS switches to main busbar system
- Without fastening materials

Connecting blocks and T-bolts can be selected Busbar system: parallel configuration

Drawings for busbars can be found in ABB Library

Type code	Description	Cross-section, mm x mm	Nominal current, A	Kits in Pack, pcs.	Busbars in Pack, pcs.
VC33/63V-S160-P	Busbar kit for connecting L1-L3 OT 160A in VMS33/63V if MBB L1-L3 position is TOP/BOT	20 x 2	160	1	3
VC33/63V-SF160-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 160A in VMS33/63V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	20 x 2	160	1	1
VC33/63V-SF160-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 160A in VMS33/63V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	20 x 2	160	1	1
VC43V-S160-P	Busbar kit for connecting L1-L3 OT 160A in VMS43V if MBB L1-L3 position is TOP/BOT	20 x 2	160	1	3
VC43V-SF160-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 160A in in VMS43V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	20 x 2	160	1	1
VC43V-SF160-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 160A in in VMS43V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	20 x 2	160	1	1
VC33-S250-P	Busbar kit for connecting L1-L3 OT 250A in VMS33/63V if MBB L1-L3 position is TOP/BOT	25 x 3	250	1	3
VC33-S250T-PEN/N	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 250A in VMS33/63V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	25 x 3	250	1	1
VC33-S250B-N/PEN	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 250A in VMS33/63V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	25 x 3	250	1	1
VC43V-S250-P	Busbar kit for connecting L1-L3 OT 250A in VMS43V if MBB L1-L3 position is TOP/BOT	25 x 3	250	1	3
VC43V-S250-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 250A in VMS43V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	25 x 3	250	1	1
VC43V-S250-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 250A in VMS43V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	25 x 3	250	1	1
VC64V-S400-P	Busbar kit for connecting L1-L3 OT 400A in VMS64V if MBB L1-L3 position is TOP/BOT	30 x 5	400	1	3
VC64V-S400-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 400A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	30 x 5	400	1	1
VC64V-S400-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 400A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	30 x 5	400	1	1

VMS kits

Connecting busbars for OT/OS

Device type	Enclosure order code	VMS box type	Type of network	Busbar kit application	MBB position*	Busbar kit order code
OT630	4TBV853473C0100 4TBV853474C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853824C0100
			TN-C / TN-S	PEN / PE 50%	PEN : TOP / BOTTOM PE : TOP	4TBV853825C0100
			PE 50% load capacity	PE 50%	PE: BOTTOM	4TBV853826C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853827C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853829C0100
OT800	4TBV853473C0100 4TBV853474C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853834C0100
			TN-C / TN-S	PEN / PE 50%	PEN : TOP / BOTTOM PE : TOP	4TBV853835C0100
			PE 50% load capacity	PE 50%	PE: BOTTOM	4TBV853836C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853837C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853838C0100
OT1000	4TBV853490C0100	VMS64H	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853839C0100
			TN-C / TN-S	PEN / PE 50%	PEN : TOP / BOTTOM PE : TOP	4TBV853842C0100
			TN-S	PE 50%	PE: BOTTOM	4TBV853841C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853840C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853843C0100
OT1250	4TBV853490C0100	VMS64H	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853844C0100
			TN-C / TN-S	PEN / PE 50%	PEN : TOP / BOTTOM PE : TOP	4TBV853842C0100
			TN-S	PE 50%	PE: BOTTOM	4TBV853841C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853846C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853848C0100

* Position of Main Busbars (MBB) relative to selected enclosure. TOP is when MBB is located above enclosure, BOTTOM is below
Check following pages for illustrative guide

** The same busbar kit is also used for connecting box with OS160 (see table below)

Type code	Description	Cross-section, mm x mm	Nominal current, A	Kits in Pack, pcs.	Busbars in Pack, pcs.
VC64V-S630-P	Busbar kit for connecting L1-L3 OT 630A in VMS64V if MBB L1-L3 position is TOP/BOT	30 x 10	630	1	3
VC64V-S630-PE-PEN-T/N-PEN-B-0.5	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 630A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 50% load capacity	30 x 5	315	1	1
VC64V-S630-N-T/PE-B-0.5	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 630A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 50% load capacity	30 x 5	315	1	1
VC64V-S630-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 630A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	30 x 10	630	1	1
VC64V-S630-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 630A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	30 x 10	630	1	1
VC64V-S800-P	Busbar kit for connecting L1-L3 OT 800A in VMS64V if MBB L1-L3 position is TOP/BOT	40 x 10	800	1	3
VC64V-S800-PE-PEN-T/N-PEN-B-0.5	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 800A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 50% load capacity	20 x 10	400	1	1
VC64V-S800-N-T/PE-B-0.5	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 800A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 50% load capacity	20 x 10	400	1	1
VC64V-S800-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 800A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	40 x 10	800	1	1
VC64V-S800-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 800A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	40 x 10	800	1	1
VC64H-S1000-P	Busbar kit for connecting L1-L3 OT 1000A in VMS64H if MBB L1-L3 position is TOP/BOT	50 x 10	1000	1	3
VC64H-S1250-PE-PEN-T/N-PEN-B-0.5	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 1000/1250A in VMS64H PE/PEN = TOP or MBB N/PEN position is BOTTOM, 50% load capacity	30 x 10	630	1	1
VC33-S1250B-PE	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 1000/1250A in VMS64H PE = BOTTOM or MBB N position is TOP, 50% load capacity	30 x 10	630	1	1
VC64H-S1000-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 1000A in VMS64H PE/PEN = TOP or MBB N/PEN position is BOTTOM, 100% load capacity	50 x 10	1000	1	1
VC64H-S1000-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 1000A in VMS64H PE = BOTTOM or MBB N position is TOP, 100% load capacity	50 x 10	1000	1	1
VC64H-S1250-P	Busbar kit for connecting L1-L3 OT 1250A in VMS64H if MBB L1-L3 position is TOP/BOT	60 x 10	1250	1	3
VC33-S1250T-PE	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 1000/1250A in VMS64H PE/PEN = TOP or MBB N/PEN position is BOTTOM, 50% load capacity	30 x 10	630	1	1
VC64H-S1250-N-T/PE-B-0.5	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 1000/1250A in VMS64H PE = BOTTOM or MBB N position is TOP, 50% load capacity	30 x 10	630	1	1
VC64H-S1250-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 1250A in VMS64H PE/PEN = TOP or MBB N/PEN position is BOTTOM, 100% load capacity	60 x 10	1250	1	1
VC64H-S1250-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 1250A in VMS64H PE = BOTTOM or MBB N position is TOP, 100% load capacity	60 x 10	1250	1	1

VMS kits

Connecting busbars for OT/OS

Device type	Enclosure order code	VMS box type	Type of network	Application	MBB position*	Busbar kit order code
OS160	4TBV853446C0100 4TBV853450C0100	VMS33/VMS63V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853849C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853806C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853807C0100
			TN-S	PE/N 100%	N 4th pole: TOP	4TBV854252C0100
			TN-S	PE/N 100%	N 4th pole: BOTTOM	4TBV854209C0100
OS160	4TBV853447C0100	VMS43V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853852C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853809C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853810C0100
			TN-S	PE/N 100%	N 4th pole: TOP	4TBV854210C0100
			TN-S	PE/N 100%	N 4th pole: BOTTOM	4TBV854211C0100
OS200 OS250	4TBV853451C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853855C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853856C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853857C0100
			TN-S	PE/N 100%	N 4th pole: TOP	4TBV854212C0100
			TN-S	PE/N 100%	N 4th pole: BOTTOM	4TBV854213C0100
OS315 OS400	4TBV853471C0100 4TBV853472C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853858C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853859C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853860C0100
			TN-S	PE/N 100%	N 4th pole: TOP	4TBV854007C0100
			TN-S	PE/N 100%	N 4th pole: BOTTOM	4TBV854008C0100

* Position of Main Busbars (MBB) relative to selected enclosure. TOP is when MBB is located above enclosure, BOTTOM is below
Check following pages for illustrative guide

Type code	Description	Cross-section, mm x mm	Nominal current, A	Kits in Pack, pcs.	Busbars in Pack, pcs.
VC33/63V-F160-P	Busbar kit for connecting L1-L3 OS 160A in VMS33/63V if MBB L1-L3 position is TOP/BOT	20 x 2	160	1	3
VC33-SF160T-PEN/N	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 160A in VMS33/63V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	20 x 2	160	1	1
VC33-SF160B-N/PEN	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 160A in VMS33/63V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	20 x 2	160	1	1
VC33/63V-F160-N-T	Busbar kit for connecting 4th pole (N) OS 160A in VMS33/63V if MBB N position is TOP, 100% load capacity	20 x 2	160	1	1
VC33/63V-F160-N-B	Busbar kit for connecting 4th pole (N) OS 160A in VMS33/63V if MBB N position is BOTTOM, 100% load capacity	20 x 2	160		
VC43V-F160-P	Busbar kit for connecting L1-L3 OS 160A in VMS43V if MBB L1-L3 position is TOP/BOT	20 x 2	160	1	3
VC43-SF160T-PEN/N	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 160A in VMS43V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	20 x 2	160	1	1
VC43-SF160B-N/PEN	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 160A in VMS43V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	20 x 2	160	1	1
VC43V-F160-N-T	Busbar kit for connecting 4th pole (N) OS 160A in VMS43V if MBB N position is TOP, 100% load capacity	20 x 2	160	1	1
VC43V-F160-N-B	Busbar kit for connecting 4th pole (N) OS 160A in VMS43V if MBB N position is BOTTOM, 100% load capacity	20 x 2	160	1	1
VC64V-F250-P	Busbar kit for connecting L1-L3 OS 250A in VMS64V if MBB L1-L3 position is TOP/BOT	25 x 3	250	1	3
VC64V-F250-PE-PEN-T/ N-PEN-B	Busbar kit for connecting 4th pole (N) OS or PEN_PE_N Terminal 250A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	25 x 3	250	1	1
VC64V-F250-N-T/PE-B	Busbar kit for connecting 4th pole (N) OS or N_PE Terminal 250A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	25 x 3	250	1	1
VC64V-F250-N-T	Busbar kit for connecting 4th pole (N) OS 250A in VMS64V if MBB N position is TOP, 100% load capacity	25 x 3	250	1	1
VC64V-F250-N-B	Busbar kit for connecting 4th pole (N) OS 250A in VMS64V if MBB N position is BOTTOM, 100% load capacity	25 x 3	250	1	1
VC64V-F400-P	Busbar kit for connecting L1-L3 OS 400A in VMS64V if MBB L1-L3 position is TOP/BOT	30 x 5	400	1	3
VC64V-F400-PE-PEN-T/ N-PEN-B	Busbar kit for connecting 4th pole (N) OS or PEN_PE_N Terminal 400A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	30 x 5	400	1	1
VC64V-F400-N-T/PE-B	Busbar kit for connecting 4th pole (N) OS or N_PE Terminal 400A in VMS64V as PE = BOTTOM or MBB N position is TOP, 100% load capacity	30 x 5	400	1	1
VC64V-F400-N-T	Busbar kit for connecting 4th pole (N) OS 400A in VMS64V if MBB N position is TOP, 100% load capacity	30 x 5	400	1	1
VC64V-F400-N-B	Busbar kit for connecting 4th pole (N) OS 400A in VMS64V if MBB N position is BOTTOM, 100% load capacity	30 x 5	400	1	1

VMS kits

Connecting busbars for OT/OS

4TBV854155C0100

4TBV853806C0100

4TBV853807C0100

Device type	Enclosure order code	VMS box type	Type of network	Application	MBB position*	Busbar kit order code
Changeover system 2x OT160	4TBV853429C0100	VMS32H	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV854155C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853806C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853807C0100
Changeover system 2x OT200-250	4TBV853429C0100	VMS33	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV854156C0100
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853815C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853816C0100
Changeover system 2x OS160	4TBV853429C0100	VMS63H	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM	4TBV853849C0100**
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	4TBV853806C0100
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	4TBV853807C0100

* Position of Main Busbars (MBB) relative to selected enclosure. TOP is when MBB is located above enclosure, BOTTOM is below
Check following pages for illustrative guide

** Two kits to be ordered for changeover systems

For changeover systems with load break switches OT160-250 / OS160
(Kits are applicable only to parallel busbar systems)

- Connection of incoming OT/OS switches to main busbar system
- Without fastening materials

Connecting blocks and T-bolts can be selected Busbar system: parallel configuration

Type code	Description	Cross-section, mm x mm	Nominal current, A	Kits in Pack, pcs.	Busbars in Pack, pcs.
VC63H-C160-P	Busbar kit for connecting Changeover system 2x OT160A in VMS33/63V if MBB L1-L3 position is TOP/BOT (6 pcs.)	20 x 2	160	1	6
VC33-SF160T-PEN/N	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 160A in VMS33/63V PE/PEN = TOP, N/PEN = BOTTOM, 100% load capacity	20 x 2	160	1	1
VC33-SF160B-N/PEN	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 160A in VMS33/63V PE = BOTTOM, N = TOP, 100% load capacity	20 x 2	160	1	1
VC63H-C250-P	Busbar kit for connecting Changeover system 2x OT200-250A in VMS33/63V if MBB L1-L3 position is TOP/BOT (6 pcs.)	25 x 3	250	1	6
VC33-S250T-PEN/N	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 250A in VMS33/63V PE/PEN = TOP, N/PEN = BOTTOM, 100% load capacity	25 x 3	250	1	1
VC33-S250B-N/PEN	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 250A in VMS33/63V PE = BOTTOM, N = TOP, 100% load capacity	25 x 3	250	1	1
VC33-F160-P	Busbar kit for connecting L1-L3 OS 160A in VMS33/63V if MBB L1-L3 position is TOP/BOT**	20 x 2	160	1	3
VC33-SF160T-PEN/N	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 160A in VMS33/63V PE/PEN = TOP, N/PEN = BOTTOM, 100% load capacity	20 x 2	160	1	1
VC33-SF160B-N/PEN	Busbar kit for connecting 4th pole (N) OT or N_PE Terminal 160A in VMS33/63V PE = BOTTOM, N = TOP, 100% load capacity	20 x 2	160	1	1

VMS kits

Connecting busbars for OT/OS





Device/VMS BOX	PHASE 1-3
OT160 VMS33/63V	4TBV853805C0100
OT160 VMS43V	4TBV853808C0100
OT200-250 VMS33/63V	4TBV853814C0100
OT200-250 VMS43V	4TBV853817C0100
OT315-400 VMS64V	4TBV853821C0100
OT630 VMS 64V	4TBV853824C0100
OT800 VMS 64V	4TBV853834C0100
OT1000 VMS 64H	4TBV853839C0100
OT1250 VMS 64H	4TBV853844C0100

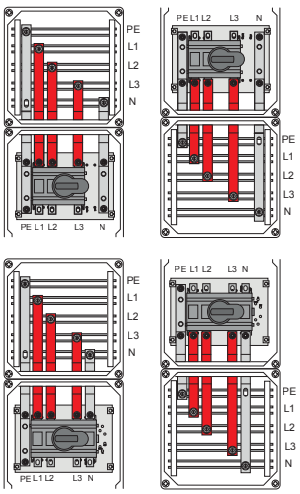

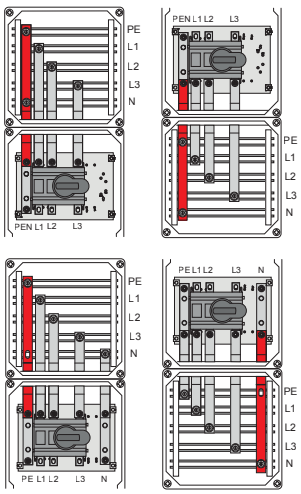

Device/VMS BOX	PHASE 1-3	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
OS160 VMS33/63V	4TBV853849C0100	4TBV853806C0100
OS160 VMS43V	4TBV853852C0100	4TBV853809C0100
OS200-250 VMS64V	4TBV853855C0100	4TBV853856C0100
OS315-400 VMS64V	4TBV853858C0100	4TBV853859C0100







	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	PE : BOTTOM N: TOP
100% PE/N	4TBV853806C0100	4TBV853807C0100
100% PE/N	4TBV853809C0100	4TBV853810C0100
100% PE/N	4TBV853815C0100	4TBV853816C0100
100% PE/N	4TBV853819C0100	4TBV853820C0100
100% PE/N	4TBV853822C0100	4TBV853823C0100
100% PE/N	4TBV853827C0100	4TBV853829C0100
50% PE	4TBV853825C0100	4TBV853826C0100
100% PE/N	4TBV853837C0100	4TBV853838C0100
50% PE	4TBV853835C0100	4TBV853836C0100
100% PE/N	4TBV853840C0100	4TBV853843C0100
50% PE	4TBV853842C0100	4TBV853841C0100
100% PE/N	4TBV853846C0100	4TBV853848C0100
50% PE	4TBV853842C0100	4TBV853841C0100







PE : BOTTOM N: TOP	N 4th pole: TOP	N 4th pole: BOTTOM
4TBV853807C0100	4TBV854252C0100	4TBV854209C0100
4TBV853810C0100	4TBV854210C0100	4TBV854211C0100
4TBV853857C0100	4TBV854212C0100	4TBV854213C0100
4TBV853860C0100	4TBV854007C0100	4TBV854008C0100

Notes

VMS kits

Boxes for OT + fuse holders combination installed on DIN-rail

4TBV853611C0100

4TBV853613C0100

For load break switch OT 16-160A + fuse holders installed on DIN rail

- For 3-pole or 4-pole OT devices
- Base with four open sides without end plates
- DIN-rails 35x7.3 mm for OT and for E27 D type fuse bases
- Pre-drilled metal mounting plate for E33 D type fuse bases
- Pre-drilled Pertinax mounting plate for DIN type fuse bases
- Protective plate with cut-out for D type fuse bases
- Transparent cover with cut-out for OT handle shaft
- PE/N Terminals are not included

Additional info can be found in User Manual:

Description	External dimensions (HxWxD, mm)	Device type	Max qty devices*	Max device current, A	Fuse base type	Max fuse current, A	Fused poles quantity, pcs.	Type code	Order code	Pack, pcs.
VMS32V for OT40F + D fuse base E27-25A	320 x 220 x 179	OT40	1	40	D E27	25	3	VB32VT-SH40/4	4TBV853611C0100	1
VMS32V for OT63F + D fuse base E33-63A	320 x 220 x 179	OT63	1	63	D E33	63	3	VB32VT-SH63/4	4TBV853610C0100	1
VMS43V for 1x OT63F-125F + NH00 fuse base	440 x 320 x 179	OT63-125F	1	125	DIN00	125	3	VB43VT-SH125/4	4TBV853612C0100	1
VMS43V for 2x OT63F-125F + NH00 fuse base	440 x 320 x 179	OT63-125F	2	125	DIN00	125	6	VB43VT-SH2X125/4	4TBV853613C0100	1

4TBV854099C0100

Cable sets for connections between OT and fuse holders

- 3 cables in one connection kit
- Double insulation
- With cable lugs/ferrules on both ends

Description	Cross-section, mm²	Nominal current, A	Length, mm	Kits in Pack, pcs.	Cables in Pack, pcs.	Type code	Order code
Cable set for connecting OT40 with D E27 in VMS32V	6	40	145	1	3	VK32V-40P	4TBV854096C0100
Cable set for connecting OT63 with D E33 in VMS32V	10	63	140	1	3	VK32V-40P	4TBV854098C0100
Cable set for connecting OT80 with OFAZ00 in VMS43V	16	80	165	1	3	VK43V-80P	4TBV854099C0100
Cable set for connecting OT125 with OFAZ00 in VMS43V	35	125	165	1	3	VK43V-125P	4TBV854154C0100

VMS kits

Boxes for OT + OFAZ fuse holders combination installed on mounting plate

4TBV853631C0100

For load break switch OT 160-800A + fuse holders OFAZ00-3 installed on mounting plate

- For 3-pole or 4-pole devices
- Base with four open sides without end plates
- Pertinax mounting plates for OFAZ type fuse holders and OT load break switches
- Plates are pre-drilled and marked for correct positioning of devices
- Transparent cover with cut-out for OT handle shaft
- PE/N Terminals are not included (use selection table below)

It is always recommended to apply extra box for cable management

Configuration of compatible OT/OS:

Front operated
Configuration 12, 22:

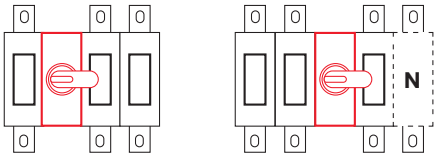

Additional info can be found in User Manual:

Description	External dimensions (HxWxD, mm)	Device type	Max quantity devices	Max device current, A	Fuse base type	Fused poles quantity, pcs.	Type code	Order code	Pack, pcs.
VMS43V for OT160 + OFAZ00	440 x 320 x 179	OT	1	160	OFAZ00	3	VB43VT-SH160/4	4TBV853614C0100	1
VMS63V for OT160 + OFAZ00	640 x 320 x 179	OT	1	160	OFAZ00	3	VB63VT-SH160/4	4TBV853615C0100	1
VMS63V for OT250 + OFAZ1	640 x 320 x 179	OT	1	250	OFAZ1	3	VB63VT-SH250/4	4TBV853630C0100	1
VMS64V for OT315-400 + OFAZ2	640 x 440 x 179	OT	2	400	OFAZ2	6	VB64VT-SH400/4	4TBV853631C0100	1
VMS64V for OT630 + OFAZ3 TOP*	640 x 440 x 179	OT	1	630	OFAZ3	3	VB64VT-SH630/4T	4TBV853632C0100	1
VMS64V for OT630 + OFAZ3 BOT**	640 x 440 x 179	OT	1	630	OFAZ3	3	VB64VT-SH630/4B	4TBV853633C0100	1

* TOP: device is positioned in the upper part of enclosure, main busbar system (MBB) is located above enclosure; 3p/4p - quantity of device poles
** BOT: device is positioned in the lower part of enclosure, main busbar system (MBB) is located below enclosure; 3p/4p - quantity of device poles

VMS kits selection

Boxes for OT + OFAZ fuse holders combination installed on mounting plate

4TBV854093C0100

Busbar kits for connecting OT and fuse holders

- 3 copper busbars in one kit
- Busbars are prepunched for connecting to devices terminals
- Installation material (bolts, nuts, etc.) is not included

Description	Cross-section, mm x mm	Nominal current, A	Kits in Pack, pcs.	Busbars in Pack, pcs.	Type code	Order code	Enclosure order code
Busbar kit for OT160 + OFAZ00 in VMS43	20 x 2	160	1	3	VL43V-160P	4TBV854024C0100	4TBV853614C0100
Busbar kit for OT160 + OFAZ00 in VMS63	20 x 2	160	1	3	VL63V-160P	4TBV854025C0100	4TBV853615C0100
Busbar kit for OT250 + OFAZ1 in VMS63	25 x 3	250	1	3	VL63V-250P	4TBV854026C0100	4TBV853630C0100
Busbar kit for OT315/400 + OFAZ2 in VMS64	30 x 5	400	1	3	VL64V-400P	4TBV854028C0100	4TBV853631C0100
Busbar kit for OT630 + OFAZ3 in VMS64	30 x 10	630	1	3	VL64V-630P	4TBV854093C0100	4TBV853632C0100

Terminals

	Description	Device type	Nominal current, A	Enclosure order code	Type code	Order code	Pack, pcs.
4TBV853681C0100	VMS TERMINAL OT / XT 160A	OT / XT 160	160	4TBV853614C0100 4TBV853615C0100	VTM160	4TBV853681C0100	1
4TBV853216C0100	VMS N feed-through terminal 160A CLAMP	OT / XT 160	160	4TBV853614C0100 4TBV853615C0100	VTM160FT-C	4TBV853216C0100	1
4TBV853700C0100	VMS N feed-through terminal 160A BOLT	OT / XT 160	160	4TBV853614C0100 4TBV853615C0100	VTM160FT-B	4TBV853700C0100	1
4TBV853682C0100	VMS TERMINAL OT / XT 250A	OT / XT 200 OT / XT 250	250	4TBV853630C0100	VTM250	4TBV853682C0100	1
4TBV853780C0100	VMS N feed-through terminal 250A length 100mm	OT / XT 200 OT / XT 250	250	4TBV853630C0100	VTM250FT-BS	4TBV853780C0100	1
4TBV853683C0100	VMS TERMINAL OT / XT 400A	OT / XT 315 OT / XT 400	400	4TBV853631C0100	VTM400	4TBV853683C0100	1
4TBV853684C0100	VMS TERMINAL OT / XT 630A for 50% PE/N	OT / XT 630	315	4TBV853632C0100 4TBV853633C0100	VTM630-50	4TBV853684C0100	1
4TBV853685C0100	VMS TERMINAL OT / XT 630A	OT / XT 630	630	4TBV853632C0100 4TBV853633C0100	VTM630	4TBV853685C0100	1

VMS kits

Connecting busbars for OT + fuse holders combination

4TBV853861C0100

4TBV853862C0100

4TBV853863C0100

4TBV854003C0100

4TBV854004C0100

Device type	Enclosure order code	VMS box type	Type of network	Application	Application vs MBB position*	Connection side to MBB
DIN00 + OT160	4TBV853614C0100	VMS43V	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM	OT Switch side
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	OT Switch side
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	OT Switch side
DIN00 + OT160	4TBV853614C0100	VMS43V	TN-C / TN-S	PHASE L1-L3	PHASE 1-3: TOP / BOTTOM	OFAZ Fuse holder side
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	OFAZ Fuse holder side
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	OFAZ Fuse holder side
DIN00 + OT160	4TBV853615C0100	VMS63V	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM	OT Switch side
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	OT Switch side
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	OT Switch side
DIN00 + OT160	4TBV853615C0100	VMS63V	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM	OFAZ Fuse holder side
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	OFAZ Fuse holder side
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	OFAZ Fuse holder side

* Position of Main Busbars (MBB) relative to selected enclosure. TOP is when MBB is located above enclosure, BOTTOM is below
Check following pages for illustrative guide

4TBV854005C0100

For combinations of load break switch OT 160-800A with fuse holders OFAZ 00-3

(Kits are applicable only to parallel busbar systems)

- Connection of incoming/outgoing OT + Fuse holders combinations to Main busbar (MBB) system
- Without fastening materials

Connecting blocks and T-bolts can be selected Busbar system: parallel configuration

Drawings for busbars can be found in ABB Library

Busbar kit order code	Type code	Description	Cross-section, mm x mm	Nominal current, A	Kits in Pack, pcs.	Busbars in Pack, pcs.
4TBV853811C0100	VC43V-S160-Plf	Busbar kit for connecting L1-L3 OT160A + OFAZ00 in VMS43V if MBB L1-L3 position is TOP/BOT. L1-L3 connection to be done from OT switch to MBB.	20 x 2	160	1	3
4TBV853812C0100	VC43V-S160-PE-PEN-T/N-PEN-B-lf	Busbar kit for connecting 4th pole (N) OT160A + OFAZ00 or PEN_PE_N Terminal 160A in VMS43V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity. L1-L3 connection to be done from OT switch to MBB.	20 x 2	160	1	1
4TBV853813C0100	VC43V-S160-N-T/PE-B-lf	Busbar kit for connecting 4th pole (N) OT160A + OFAZ00 / N_PE Terminal 160A in VMS43V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity. L1-L3 connection to be done from OT switch to MBB.	20 x 2	160	1	1
4TBV853861C0100	VC43V-SH160-P	Busbar kit for connecting L1-L3 OT160A + OFAZ00 in VMS43V if MBB L1-L3 position is TOP/BOT. L1-L3 connection to be done from OFAZ fuse holder to MBB.	20 x 2	160	1	3
4TBV853862C0100	VC43V-SH160-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT160A + OFAZ00 or PEN_PE_N Terminal 160A in VMS43V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity. L1-L3 connection to be done from OFAZ fuse holder to MBB.	20 x 2	160	1	1
4TBV853863C0100	VC43V-SH160-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT160A + OFAZ00 / N_PE Terminal 160A in VMS43V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity. L1-L3 connection to be done from OFAZ fuse holder to MBB.	20 x 2	160	1	1
4TBV854003C0100	VC63V-SH160-P	Busbar kit for connecting L1-L3 OT160A + OFAZ00 in VMS63V if MBB L1-L3 position is TOP/BOT. L1-L3 connection to be done from OFAZ fuse holder to MBB.	20 x 2	160	1	3
4TBV854004C0100	VC63V-SH160-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT160A + OFAZ00 or PEN_PE_N Terminal 160A in VMS63V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity. L1-L3 connection to be done from OFAZ fuse holder to MBB.	20 x 2	160	1	1
4TBV854005C0100	VC63V-SH250-P	Busbar kit for connecting 4th pole (N) OT160A + OFAZ00 / N_PE Terminal 160A in VMS63V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity. L1-L3 connection to be done from OFAZ fuse holder to MBB.	20 x 2	160	1	1
4TBV853805C0100	VC33-S160-P	Busbar kit for connecting L1-L3 OT 160A in VMS33/63V if MBB L1-L3 position is TOP/BOT	20 x 2	160	1	3
4TBV853806C0100	VC33-SF160T-PEN/N	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 160A in VMS33/63V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity.	20 x 2	160	1	1
4TBV853807C0100	VC33-SF160B-N/PEN	Busbar kit for connecting 4th pole (N) OT / N_PE Terminal 160A in VMS33/63V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity.	20 x 2	160	1	1

VMS kits

Connecting busbars for OT + fuse holders combination

Device type	Enclosure order code	VMS box type	Type of network	Application	Application vs MBB position*	Connection side to MBB**
DIN1 + OT250	4TBV853630C0100	VMS63V	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM	OT Switch side
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	OT Switch side
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	OT Switch side
DIN1 + OT250	4TBV853630C0100	VMS63V	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM	OFAZ Fuse holder side
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	OFAZ Fuse holder side
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	OFAZ Fuse holder side
DIN2 + OT315/400	4TBV853631C0100		TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM	OT Switch side
		VMS64V	TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	OT Switch side
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	OT Switch side
DIN2 + OT315/400	4TBV853631C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM	OFAZ Fuse holder side
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	OFAZ Fuse holder side
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	OFAZ Fuse holder side
DIN3 + OT630	4TBV853632C0100 4TBV853633C0100	VMS64V	TN-C / TN-S	PHASE	TOP / BOTTOM	OT Switch side
			TN-C / TN-S	PEN / PE 50%	PEN : TOP / BOTTOM PE : TOP	OT Switch side
			TN-S	PE 50%	PE: BOTTOM	OT Switch side
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	OT Switch side
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	OT Switch side
DIN3 + OT630	4TBV853632C0100 4TBV853633C0100	VMS64V	TN-C / TN-S	PHASE	TOP / BOTTOM	OFAZ Fuse holder side
			TN-C / TN-S	PEN / PE 50%	PEN : TOP / BOTTOM PE : TOP	OFAZ Fuse holder side
			TN-S	PE 50%	PE: BOTTOM	OFAZ Fuse holder side
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM	OFAZ Fuse holder side
			TN-S	PE/N 100%	PE : BOTTOM N: TOP	OFAZ Fuse holder side

* Position of Main Busbars (MBB) relative to selected enclosure. TOP is when MBB is located above enclosure, BOTTOM is below
Check following pages for illustrative guide

Busbar kit order code	Type code	Description	Cross-section, mm x mm	Nominal current, A	Kits in Pack, pcs.	Busbars in Pack, pcs.
4TBV853814C0100	VC33/63V-S250-P	Busbar kit for connecting L1-L3 OT 250A in VMS33/63V if MBB L1-L3 position is TOP/BOT.	25 x 3	250	1	3
4TBV853815C0100	VC33/63V-S250-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 250A in VMS33/63V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity.	25 x 3	250	1	1
4TBV853816C0100	VC33/63V-S250-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT / N_PE Terminal 250A in VMS33/63V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity.	25 x 3	250	1	1
4TBV854006C0100	VC63-SH250-P	Busbar kit for connecting L1-L3 OT250A + OFAZ1 in VMS63V if MBB L1-L3 position is TOP/BOT. L1-L3 connection to be done from OFAZ fuse holder to MBB.	25 x 3	250	1	3
Please use cable connection						
Please use cable connection						
4TBV853821C0100	VC33-S400-P	Busbar kit for connecting L1-L3 OT 400A in VMS64V if MBB L1-L3 position is TOP/BOT.	30 x 5	400	1	3
4TBV853822C0100	VC33-S400T-PEN/N	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 400A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity.	30 x 5	400	1	1
4TBV853823C0100	VC33-S400B-N/PEN	Busbar kit for connecting 4th pole (N) OT / N_PE Terminal 400A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity.	30 x 5	400	1	1
4TBV854009C0100	VC64V-SH400-P	Busbar kit for connecting L1-L3 OT400A + OFAZ2 in VMS64V if MBB L1-L3 position is TOP/BOT. L1-L3 connection to be done from OFAZ fuse holder to MBB.	30 x 5	400	1	3
4TBV854011C0100	VC64V-SH400-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT400A + OFAZ2 or PEN_PE_N Terminal 400A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity. L1-L3 connection to be done from OFAZ fuse holder to MBB.	30 x 5	400	1	1
4TBV854012C0100	VC64V-SH400-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT400A + OFAZ2 / N_PE Terminal 400A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity. L1-L3 connection to be done from OFAZ fuse holder to MBB.	30 x 5	400	1	1
4TBV853824C0100	VC33-S630-P	Busbar kit for connecting L1-L3 OT 630A in VMS64V if MBB L1-L3 position is TOP/BOT.	30 x 10	630	1	3
4TBV853825C0100	VC33-S630T-PE	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 630A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 50% load capacity.	30 x 5	400	1	1
4TBV853826C0100	VC33-S630B-PE	Busbar kit for connecting 4th pole (N) OT / N_PE Terminal 630A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 50% load capacity.	30 x 5	400	1	1
4TBV853827C0100	VC33-S630T-PEN/N	Busbar kit for connecting 4th pole (N) OT or PEN_PE_N Terminal 630A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity.	30 x 10	630	1	1
4TBV853829C0100	VC33-S630B-PEN/N	Busbar kit for connecting 4th pole (N) OT / N_PE Terminal 630A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity.	30 x 10	630A	1	1
4TBV854013C0100	VC64V-SH630-P	Busbar kit for connecting L1-L3 OT630A + OFAZ3 in VMS64V if MBB L1-L3 position is TOP/BOT. L1-L3 connection to be done from OFAZ fuse holder to MBB.	30 x 10	630	1	3
4TBV854014C0100	VC64V-SH630-PE-PEN-T/N-PEN-B-0.5	Busbar kit for connecting 4th pole (N) OT630A + OFAZ3 or PEN_PE_N Terminal 630A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 50% load capacity. L1-L3 connection to be done from OFAZ fuse holder to MBB.	30 x 5	400	1	1
4TBV854015C0100	VC64V-SH630-N-T/PE-B-0.5	Busbar kit for connecting 4th pole (N) OT630A + OFAZ3 / N_PE Terminal 630A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 50% load capacity. L1-L3 connection to be done from OFAZ fuse holder to MBB.	30 x 5	400	1	1
4TBV854016C0100	VC64V-SH630-PE-PEN-T/N-PEN-B	Busbar kit for connecting 4th pole (N) OT630A + OFAZ3 or PEN_PE_N Terminal 630A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity. L1-L3 connection to be done from OFAZ fuse holder to MBB.	30 x 10	630	1	1
4TBV854017C0100	VC64V-SH630-N-T/PE-B	Busbar kit for connecting 4th pole (N) OT630A + OFAZ3 / N_PE Terminal 630A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity. L1-L3 connection to be done from OFAZ fuse holder to MBB.	30 x 10	630A	1	1

VMS kits

Connecting busbars for OT + fuse holders combination

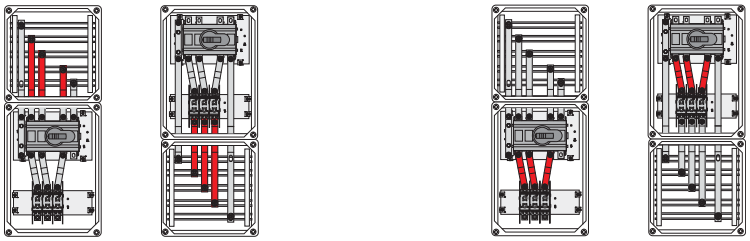

Devices/VMS BOX	PHASE 1-3 (to busbar system)		PHASE 1-3 (Switch to Fuse)	
	Switch side*	Fuse side**	Switch side*	Fuse side**
OT40 + D FB E27-25A / VMS32V	N.A.		4TBV854293C0100	
OT63 + D FB E33-63A / VMS32V	N.A.		4TBV854294C0100	
1x OT63-80 + NH00 FB / VMS43V	N.A.		4TBV854295C0100	
2x OT63-80 + NH00 FB / VMS43V	N.A.		4TBV854295C0100 2x	
1x OT100-125 + NH00 FB / VMS43V	N.A.		4TBV854296C0100	
2x OT100-125 + NH00 FB / VMS43V	N.A.		4TBV854296C0100 2x	
OT160 + NH00 FB / VMS43V Switch side*	4TBV853811C0100		4TBV854024C0100	
OT160 + NH00 FB / VMS43V Fuse side**	4TBV853861C0100		4TBV854024C0100	
OT160 + NH00 FB / VMS63V Switch side*	4TBV853805C0100		4TBV854025C0100	
OT160 + NH00 FB / VMS63V Fuse side**	4TBV854003C0100		4TBV854025C0100	
OT250 + NH1 FB / VMS63V Switch side*	4TBV853814C0100		4TBV854026C0100	
OT250 + NH1 FB / VMS63V Fuse side**	4TBV854006C0100		4TBV854026C0100	

* **Switch side**: switch is closest to the busbar system.
** **Fuse side**: fuse base is closest to the busbar system.

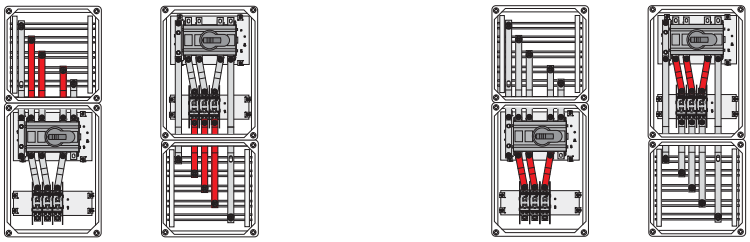

Devices/VMS BOX	PHASE 1-3 (to busbar system)		PHASE 1-3 (Switch to Fuse)	
	Switch side*	Fuse side**	Switch side*	Fuse side**
OT315-400 + NH2 FB / VMS64V Switch side*	4TBV853821C0100		4TBV854028C0100	
OT315-400 + NH2 FB / VMS64V Fuse side**	4TBV854009C0100		4TBV854028C0100	
OT630 + NH3 FB / VMS64V Switch side*	4TBV853824C0100		4TBV854093C0100	
OT630 + NH3 FB / VMS64V Fuse side**	4TBV854013C0100		4TBV854093C0100	

* **Switch side**: switch is closest to the busbar system.
** **Fuse side**: fuse base is closest to the busbar system.

VMS kits

Connecting busbars for OT + fuse holders combination





PE TOP / N BOT / PEN		N TOP / PE BOT	
Switch side*	**Fuse side****	**Switch side***	**Fuse side****
N.A.		N.A.	
N.A.		N.A.	
N.A.		N.A.	
N.A.		N.A.	
N.A.		N.A.	
N.A.		N.A.	
4TBV853812C0100		4TBV853813C0100	
4TBV853862C0100		4TBV853863C0100	
4TBV853806C0100		4TBV853807C0100	
4TBV854004C0100		4TBV854005C0100	
4TBV853815C0100		4TBV853816C0100	
N.A.		N.A.	





PE TOP / N BOT / PEN		N TOP / PE BOT	
Switch side*	**Fuse side****	**Switch side***	**Fuse side****
4TBV853822C0100		4TBV853823C0100	
4TBV854011C0100		4TBV854012C0100	
100% PE/N	4TBV853827C0100	100% PE/N	4TBV853829C0100
50% PE	4TBV853825C0100	50% PE	4TBV853826C0100
100% PE/N	4TBV854016C0100	100% PE/N	4TBV854017C0100
50% PE	4TBV854014C0100	50% PE	4TBV854015C0100

VMS kits

Boxes D-type fuse sockets or XLP installed on busbars

4TBV853222C0100

4TBV853634C0100

For XLP and D-type bus mounting fuse sockets installed on busbar

- For 3-pole devices
- Base with four open sides without end plates
- With busbar holders 4TBV828322C0100 for 3f + N + PE
- Busbar center distance 60 mm
- Without busbars
- Protective cover with cut-out for XLP operating handle and D-type fuse sockets
- Trim frame for D-type sockets, Front frames for XLPs and reserve section covers should be ordered separately. Please refer to the guide next page.

4TBV853231C0100

4TBV853238C0100

Additional info can befound in User Manual:

Description	External dimensions (HxWxD, mm)	Device type	Max qty devices*	Max device current, A	Max quantity 3-phase load groups*	Type code	Order code	Pack, pcs.
VMS 32 with 60mm busbar system 250/400A for XLP00	320 x 220 x 179	XLP + NH00	1	160	N/A	VB32VT-XZ160/3	4TBV853214C0100	1
VMS 33 with 60mm busbar system 250/400A for XLP00 / D-type fuse sockets	320 x 320 x 179	XLP + NH00	2	160	E18: 8 E27: 5 E33: 4	VB33HT-XZ2x160/3	4TBV853221C0100	1
VMS 43H with 60mm busbar system 250/400A for XLP00 / D-type fuse sockets	320 x 440 x 179	XLP + NH00	2	160	E18: 8 E27: 5 E33: 4	VB43HT-XZ2x160/3	4TBV853634C0100	1
VMS 63H with 60mm busbar system 250/400A for XLP00 / D-type fuse sockets	320 x 640 x 179	XLP + NH00	2 x 2	160	E18: 8 x 2 E27: 5 x 2 E33: 4 x 2	VB63HT-XZ4x160/3	4TBV853222C0100	1
VMS 63V 60mm busbar system 250/400A for XLP00 / D-type fuse sockets TOP**	640 x 320 x 179	XLP + NH00	2	160	E18: 8 E27: 5 E33: 4	VB63VT-XZ2x160/3T	4TBV853223C0100	1
VMS 63V 60mm busbar system 250/400A for XLP00 / D-type fuse sockets BOT***	640 x 320 x 179	XLP + NH00	2	160	E18: 8 E27: 5 E33: 4	VB63VT-XZ2x160/3B	4TBV853224C0100	1
VMS 63V with 60mm busbar system 400A for 3phase XLP1 TOP**	640 x 320 x 179	XLP + NH1	1	250	N/A	VB63VT-XZ250/3T	4TBV853225C0100	1
VMS 63V with 60mm busbar system 400A for 3phase XLP1 BOT***	640 x 320 x 179	XLP + NH1	1	250	N/A	VB63VT-XZ250/3B	4TBV853230C0100	1
VMS 64V with 60mm busbar system 400A for 3phase XLP1 TOP**	640 x 440 x 179	XLP + NH1	1	250	N/A	VB64VT-XZ250/3T	4TBV853231C0100	1
VMS 64V with 60mm busbar system 400A for 3phase XLP1 BOT***	640 x 440 x 179	XLP + NH1	1	250	N/A	VB64VT-XZ250/3B	4TBV853238C0100	1

* By determining quantity of devices per enclosure use RDF values from table 101 of IEC 61439-2
** TOP: device is positioned in the upper part of enclosure
*** BOT: device is positioned in the lower part of enclosure

VMS kits

Boxes D-type fuse sockets or XLP installed on busbars

Accessories for D-type sockets installation





	Description	Type code	E33 socket	E27 socket	E18 socket	Pack, pcs.
4TBV854306C0100	Trim frame VMS	VA-TF	■	■	■	1
4TBV854313C0100	Reserve section cover (flat) for closing unused space H x W: 195 x 54 mm pitch 3 x 18 mm	VA-ZA	if q-ty of load groups (strings) < 4	if q-ty of load groups (strings) < 5	if q-ty of load groups (strings) < 8 (E18 string with 26 mm width) OR if q-ty of load groups (strings) < 6 (E18 string with 36 mm width)	1

Accessories for XLP installation




4TBV853214C0100 | 4TBV853221C0100 4TBV853634C0100 4TBV853222C0100 4TBV853223C0100 4TBV853224C0100 | 4TBV853221C0100 4TBV853634C0100 4TBV853222C0100 4TBV853223C0100 4TBV853224C0100 | 4TBV853225C0100 4TBV853230C0100 4TBV853231C0100 4TBV853238C0100

	Description	Type code	1 x XLP00	1 x XLP00 installed in cut-out for 2 x XLP00	2 x XLP00	1 x XLP1	Pack, pcs.
2CPX062952R9999	Front frame 1x XLP00	ZH425	■	■		additional accessories are not required	1
2CPX062953R9999	Front frame 2x XLP00	ZH426			■	additional accessories are not required	1
2CPX062374R9999	Reserve section cover (Z-shape) for closing unused space	ZA4P10			■	additional accessories are not required	10
4TBV854313C0100	Reserve section cover (flat) for closing unused space H x W: 195 x 54 mm pitch 3 x 18 mm			■ (3 pcs. needed)		additional accessories are not required	1

VMS kits

Boxes D-type fuse sockets or XLP installed on busbars

	Article	Unit	Type code	Order code
ZE60	**Neozed bus-mounting fuse socket E18, width 26 mm** For gauge ring inserts, 3-pole, with covers and nameplates, with E18 thread, safety fuse max. 63 A	1	ZE60	2CPX061045R9999
		10	ZE60P10	2CPX062400R9999
ZE61	**Diazed bus-mounting fuse socket E27, width 42 mm** For gauge ring inserts, 3-pole, with covers and nameplates, with E27 thread, safety fuse max. 25 A	1	ZE61	2CPX061046R9999
ZE62	**Diazed bus-mounting fuse socket E33, width 56 mm** For gauge ring inserts, 3-pole, with covers and nameplates, with E33 thread, safety fuse max. 63 A	1	ZE62	2CPX061047R9999

Spare parts and accessories

Spare cover plates

Description	Enclosure code	Type code	Order code	Pack, pcs.
VMS32 Cover plate for DIN00	4TBV853214C0100	VA-CP32V-XLP00	4TBV853239C0100	1
VMS33 Cover plate for DIN00	4TBV853221C0100	VA-CP33-XLP00	4TBV853240C0100	1
VMS63H Cover plate for DIN00	4TBV853222C0100	VA-CP63H-XLP00	4TBV853245C0100	1
VMS63V Cover plate for DIN00	4TBV853223C0100 4TBV853224C0100	VA-CP63V-XLP00	4TBV853247C0100	1
VMS63V Cover plate for DIN1 3p TOP	4TBV853225C0100	VA-CP63V-XLP1-T	4TBV853249C0100	1
VMS63V Cover plate for DIN1 3p BOT	4TBV853230C0100	VA-CP63V-XLP1-B	4TBV853317C0100	1
VMS64V Cover plate for DIN1 3P TOP	4TBV853231C0100	VA-CP64V-XLP1-T	4TBV853318C0100	1
VMS64V Cover plate for DIN1 3P BOT	4TBV853238C0100	VA-CP64V-XLP1-B	4TBV853319C0100	1
VMS43H Cover plate for DIN00	4TBV853634C0100	VA-CP43H-XLP00	4TBV853635C0100	1

Notes

VMS kits

Boxes for OFAZ fuse holders or XLP installed on mounting plate

4TBV853672C0100

4TBV853680C0100

For OFAZ or XLP installed on mounting plate

- For 3-pole or 4-pole devices
- Base with four open sides without end plates
- Pertinax mounting plates for OFAZ type fuse holders and XLP fuse load break switches
- Plates are pre-drilled and marked for correct positioning of devices
- Protective plate with cut-out for XLP operating handle
- Use blanking cover 2CPX042238R9999 in order to close unused cut-out space
- PE/N Terminals are not included (use selection table below)

Additional info can be found in User Manual:

Description	External dimensions (HxWxD, mm)	Device type	Max quantity devices*	Max device current, A	Fuse type	Max quantity 3-phase load groups*	Type code	Order code	Pack, pcs.
VMS 32H for OFAZ DIN00 fuse base	220 x 320 x 179	OFAZ	N/A	N/A	NH00	1	VB32HT-H160/4	4TBV853636C0100	1
VMS 33 for 1x/2x OFAZ/XLP DIN00 3-4P	320 x 320 x 179	OFAZ/XLP	2	160	NH00	2	VB33HT-H2x160/4	4TBV853658C0100	1
VMS 43V for 1x/2x OFAZ/XLP DIN00 3-4P	440 x 320 x 179	OFAZ/XLP	2	160	NH00	2	VB43VT-H2x160/4	4TBV853659C0100	1
VMS 43V for OFAZ/XLP DIN1	440 x 320 x 179	OFAZ/XLP	1	250	NH1	1	VB43VT-H250/4	4TBV853660C0100	1
VMS 63H for 1x/4x OFAZ/XLP DIN00 3-4P	320 x 640 x 179	OFAZ/XLP	4	160	NH00	4	VB63HT-H4x160/4	4TBV853672C0100	1
VMS 63V for OFAZ/XLP DIN1 3p	640 x 320 x 179	OFAZ/XLP	1	250	NH1	1	VB63VT-H250/4	4TBV853679C0100	1
VMS 64V for OFAZ/XLP DIN 1/2/3 3-4p	640 x 440 x 179	OFAZ/XLP	1	630	NH1/ NH2/ NH3	1	VB64VT-H630/4	4TBV853680C0100	1

* By determining quantity of devices per enclosure use RDF values from table 101 of IEC 61439-2

VMS kits

Boxes for OFAZ fuse holders or XLP installed on mounting plate

Terminals

Image	Description	Device type	Enclosure order code	Nominal current, A	Type code	Order code	Pack, pcs.
4TBV853216C0100	VMS N feed-through terminal 160A CLAMP	OFAZ00 XLP00	4TBV853636C0100 4TBV853658C0100 4TBV853659C0100 4TBV853672C0100	160	VTM160FT-C	4TBV853216C0100	1
4TBV853700C0100	VMS N feed-through terminal 160A BOLT	OFAZ00 XLP00	4TBV853636C0100 4TBV853658C0100 4TBV853659C0100 4TBV853672C0100	160	VTM160FT-B	4TBV853700C0100	1
4TBV853780C0100	VMS N feed-through terminal 250A length = 100 mm	2x/4x OFAZ00 2x/4x XLP00	4TBV853658C0100 4TBV853659C0100 4TBV853672C0100	250	VTM250FT-BS	4TBV853780C0100	1
		OFAZ1 XLP1	4TBV853660C0100 4TBV853679C0100				
4TBV853217C0100	VMS N feed-through terminal 250A length = 200 mm	OFAZ1 XLP1	4TBV853680C0100	250	VTM250FT-BL	4TBV853217C0100	1
4TBV853218C0100	VMS N feed-through terminal 630A length = 200 mm	OFAZ2 OFAZ3 XLP2 XLP3	4TBV853680C0100	630	VTM630FT-B	4TBV853218C0100	1

Other accessories

Image	Description	Type code	Order code	Pack, pcs.
1SEP407793R0001	XLP00 Cable shroud	CS-XLP00-3P	1SEP407793R0001	1
1SEP407793R0002	XLP1 Cable shroud	CS-XLP1-3P	1SEP407793R0002	1
1SEP407952R0001	XLP2/3 Cable shroud Shroud can not be used in configurations where XLP 2/3 is located in upper part of enclosure.	CS-XLP23-3P	1SEP407952R0001	1

VMS kits

Connecting busbars for XLP/OFAZ

4TBV854172C0100

4TBV854197C0100

4TBV854170C0100

4TBV854171C0100

4TBV854175C0100

Device type	Enclosure order code	VMS box type	Type of network	Application	Application vs MBB position*
OFAZ DIN00	4TBV853636C0100	VMS32H	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
OFAZ DIN00	4TBV853658C0100	VMS33	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
OFAZ DIN00	4TBV853659C0100	VMS43V	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
OFAZ DIN1	4TBV853680C0100	VMS43V / VMS63V / VMS64V	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
OFAZ DIN2	4TBV853680C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
OFAZ DIN3	4TBV853680C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	PHASE 1-3 : TOP / BOTTOM
			TN-C / TN-S	PEN / PE 50%	PEN : TOP / BOTTOM PE : TOP
			TN-S	PE 50%	PE: BOTTOM
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP

* Position of Main Busbars (MBB) relative to selected enclosure. TOP is when MBB is located above enclosure, BOTTOM is below
Check following pages for illustrative guide

** In case of XLP with DIN1 fuse link installed in VMS33 / VMS63V cable connection should be used for PE / N / PEN

4TBV854176C0100

For fuse holders OFAZ 00-3 and fuse load breakers XLP

(Kits are applicable only to parallel busbar systems)

- Connection of incoming/outgoing fuse holders OFAZ or XLP fuse load breakers to main busbar system
- Without fastening materials

Connecting blocks and T-bolts can be selected Busbar system: parallel configuration

Drawings for busbars can be found in ABB Library

Busbar kit order code	Type code	Description	Cross-section, mm x mm	Nominal current, A	Pack, pcs.
4TBV854157C0100	VC32H-H160-P	Busbar kit for connecting OFAZ00 in VMS32H if MBB L1-L3 position is TOP/BOT.	20 x 2	160	3
4TBV854158C0100	VC32H-H160-PE-PEN-T/N-PEN-B	Busbar kit for connecting OFAZ00 / PEN PE_N Terminal 160A in VMS32H if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity.	20 x 2	160	1
4TBV854159C0100	VC32H-H160-N-T/PE-B	Busbar kit for connecting OFAZ00 / N_PE Terminal 160A in VMS32H if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity.	20 x 2	160	1
4TBV854160C0100	VC33/63H-H160-P	Busbar kit for connecting OFAZ00 in VMS33 if MBB L1-L3 position is TOP/BOT.	20 x 2	160	3
4TBV854161C0100	VC33/63H-HX160-PE-PEN-T/N-PEN-B	Busbar kit for connecting OFAZ/XLP00 / PEN_PE_N Terminal 160A in VMS33 if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity.	20 x 2	160	1
4TBV854162C0100	VC33/63H-HX160-N-T/PE-B	Busbar kit for connecting OFAZ/XLP00 / N_PE Terminal 160A in VMS33 if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity.	20 x 2	160	1
4TBV854163C0100	VC43V-H160-P	Busbar kit for connecting OFAZ00 in VMS43V if MBB L1-L3 position is TOP/BOT.	20 x 2	160	3
4TBV854164C0100	VC43V-HX160-PE-PEN-T/N-PEN-B	Busbar kit for connecting OFAZ/XLP00 / PEN_PE_N Terminal 160A in VMS43V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity.	20 x 2	160	1
4TBV854165C0100	VC43V-HX160-N-T/PE-B	Busbar kit for connecting OFAZ/XLP00 / N_PE Terminal 160A in VMS43V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity.	20 x 2	160	1
4TBV854166C0100	VC43V/63V/64V-H250-P	Busbar kit for connecting OFAZ1 in VMS43V/63V/64V if MBB L1-L3 position is TOP/BOT.	25 x 3	250	3
Please use cable connection					
Please use cable connection					
4TBV854169C0100	VC64V-H400-P	Busbar kit for connecting OFAZ2 in VMS64V if MBB L1-L3 position is TOP/BOT.	30 x 5	400	3
4TBV854170C0100	VC64V-HX630-PE-PEN-T/N-PEN-B	Busbar kit for connecting OFAZ/XLP2 / PEN_PE_N Terminal 400A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity.	30 x 5	400	1
4TBV854171C0100	VC64V-HX630-N-T/PE-B	Busbar kit for connecting OFAZ/XLP2 / N_PE Terminal 400A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity.	30 x 5	400	1
4TBV854172C0100	VC64V-H630-P	Busbar kit for connecting OFAZ3 in VMS64V if MBB L1-L3 position is TOP/BOT.	30 x 10	800	3
4TBV854170C0100	VC64-HX630T-PE50	Busbar kit for connecting OFAZ/XLP2 / PEN_PE_N Terminal 630A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 50% load capacity.	30 x 5	400	1
4TBV854171C0100	VC64-HX630B-PE50	Busbar kit for connecting OFAZ/XLP2 / N_PE Terminal 630A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 50% load capacity.	30 x 5	400	1
4TBV854175C0100	VC64V-HX630-PE-PEN-T/N-PEN-B	Busbar kit for connecting OFAZ/XLP3 / PEN_PE_N Terminal 630A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity.	30 x 10	800	1
4TBV854176C0100	VC64V-HX630-N-T/PE-B	Busbar kit for connecting OFAZ/XLP3 / N_PE Terminal 630A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity.	30 x 10	800	1

VMS kits

Connecting busbars for XLP/OFAZ

Device type	Enclosure order code	VMS box type	Type of network	Application	Application vs MBB position*
XLP + DIN00	4TBV853658C0100	VMS33 / VMS63H	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
XLP + DIN00	4TBV853659C0100	VMS43V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
XLP + DIN1	4TBV853660C0100 4TBV853679C0100 4TBV853680C0100	VMS33** / VMS63V** VMS64V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
XLP + DIN2	4TBV853680C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
XLP + DIN3	4TBV853680C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	TOP / BOTTOM
			TN-C / TN-S	PEN / PE/N 100%	PEN : TOP / BOTTOM PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM

* Position of Main Busbars (MBB) relative to selected enclosure. TOP is when MBB is located above enclosure, BOTTOM is below
Check following pages for illustrative guide

** In case of XLP with DIN1 fuse link installed in VMS33 / VMS63V cable connection should be used for PE / N / PEN

Busbar kit order code	Type code	Description	Cross-section, mm x mm	Nominal current, A	Pack, pcs.
4TBV854177C0100	VC33/63H-X160-P	Busbar kit for connecting XLP00 in VMS33 if MBB L1-L3 position is TOP/BOT	20 x 2	160	3
4TBV854161C0100	VC33-HX160T-PEN/N	Busbar kit for connecting OFAZ/XLP00 / PEN_PE_N Terminal 160A in VMS33 if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	20 x 2	160	1
4TBV854162C0100	VC33-HX160B-N/PEN	Busbar kit for connecting OFAZ/XLP00 / N_PE Terminal 160A in VMS33 if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	20 x 2	160	1
4TBV854180C0100	VC33/63H-X160T-N-T	Busbar kit for connecting 4th pole (N) XLP00 in VMS33 if MBB N position is TOP	20 x 2	160	1
4TBV854181C0100	VC33/63H-X160B-N-B	Busbar kit for connecting 4th pole (N) XLP00 in VMS33 if MBB N position is BOTTOM	20 x 2	160	1
4TBV854182C0100	VC43V-X160-P	Busbar kit for connecting XLP00 in VMS43V if MBB L1-L3 position is TOP/BOT	20 x 2	160	3
4TBV854164C0100	VC43-HX160T-PEN/N	Busbar kit for connecting OFAZ/XLP00 / PEN_PE_N Terminal 160A in VMS43V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	20 x 2	160	1
4TBV854165C0100	VC43-HX160B-N/PEN	Busbar kit for connecting OFAZ/XLP00 / N_PE Terminal 160A in VMS43V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	20 x 2	160	1
4TBV854185C0100	VC43V-X160T-N-T	Busbar kit for connecting 4th pole (N) XLP00 in VMS43V if MBB N position is TOP	20 x 2	160	1
4TBV854186C0100	VC43V-X160B-N-B	Busbar kit for connecting 4th pole (N) XLP00 in VMS43V if MBB N position is BOTTOM	20 x 2	160	1
4TBV854187C0100	VC43V/63V/64V-X250-P	Busbar kit for connecting XLP1 in VMS43V/63V/64V if MBB L1-L3 position is TOP/BOT	25 x 3	250	3
4TBV854188C0100	VC64V-X250T-PE-PEN-T/N-PEN-B	Busbar kit for connecting XLP1 / PEN_PE_N Terminal 250A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity**	25 x 3	250	1
4TBV854189C0100	VC64V-X250B-N-T/PE-B	Busbar kit for connecting XLP1 / N_PE Terminal 250A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity**	25 x 3	250	1
4TBV854190C0100	VC43V/63V/64V-X250T-N-T	Busbar kit for connecting 4th pole (N) XLP1 in VMS43V/63V/64V if MBB N position is TOP	25 x 3	250	1
4TBV854191C0100	VC43V/63V/64V-X250B-N-B	Busbar kit for connecting 4th pole (N) XLP1 in VMS43V/63V/64V if MBB N position is BOTTOM	25 x 3	250	1
4TBV854192C0100	VC64V-X400-P	Busbar kit for connecting XLP2 in VMS64V if MBB L1-L3 position is TOP/BOT	30 x 5	400	3
4TBV854170C0100	VC64-HX630T-PE50	Busbar kit for connecting OFAZ/XLP2 / PEN_PE_N Terminal 400A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 100% load capacity	30 x 5	400	1
4TBV854171C0100	VC64-HX630B-PE50	Busbar kit for connecting OFAZ/XLP2 / N_PE Terminal 400A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	30 x 5	400	1
4TBV854195C0100	VC64V-X400T-N-T	Busbar kit for connecting 4th pole (N) XLP2 in VMS64V if MBB N position is TOP	30 x 5	400	1
4TBV854196C0100	VC64V-X400B-N-B	Busbar kit for connecting 4th pole (N) XLP2 in VMS64V if MBB N position is BOTTOM	30 x 5	400	1
4TBV854197C0100	VC64V-X630-P	Busbar kit for connecting XLP3 in VMS64V if MBB L1-L3 position is TOP/BOT	30 x 10	800	3
4TBV854170C0100	VC64-HX630T-PE50	Busbar kit for connecting OFAZ/XLP2 / PEN_PE_N Terminal 630A in VMS64V if MBB PE/PEN position is TOP or MBB N/PEN position is BOTTOM, 50% load capacity	30 x 5	400	1
4TBV854171C0100	VC64-HX630B-PE50	Busbar kit for connecting OFAZ/XLP2 / N_PE Terminal 630A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 50% load capacity	30 x 5	400	1
4TBV854175C0100	VC64-HX630T-PEN/N	Busbar kit for connecting 4th pole (N) XLP3 in VMS64V if MBB N position is TOP	30 x 10	800	1
4TBV854176C0100	VC64-HX630B-N/PEN	Busbar kit for connecting 4th pole (N) XLP3 in VMS64V if MBB N position is BOTTOM	30 x 10	800	1

VMS kits

Connecting busbars for XLP/OFAZ

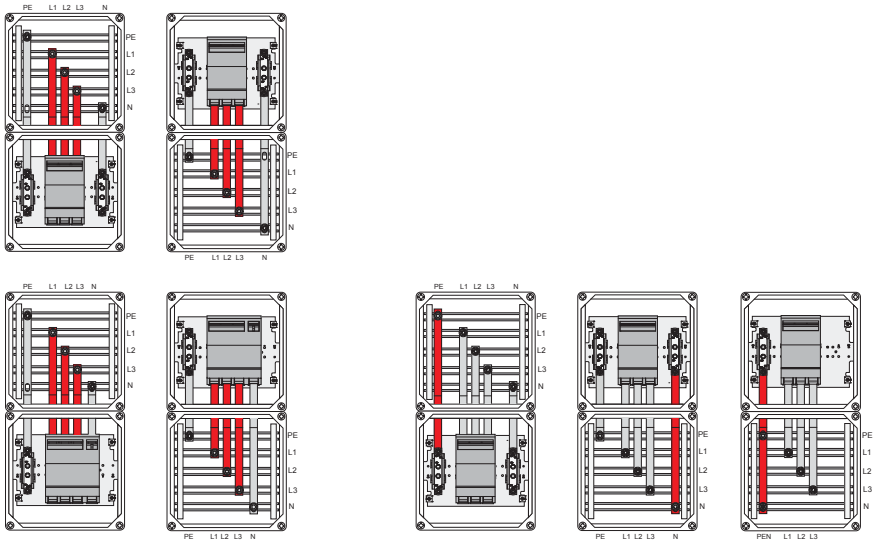

Device/VMS BOX	PHASE 1-3	PE TOP / N BOT / PEN	
1x XLP00 / VMS33/63H	4TBV854177C0100	4TBV854161C0100	
2x/4x XLP00 / VMS33/63H	(2x/4x) 4TBV854292C0100 (cable)	N.A. (cable)	
XLP00 / VMS43V	4TBV854182C0100	4TBV854164C0100	
XLP1 / VMS43V/63V	4TBV854187C0100	N.A. (cable)	
XLP1 / VMS64V	4TBV854187C0100	4TBV854188C0100	
XLP2 / VMS64V	4TBV854192C0100	4TBV854170C0100	
XLP3 / N.A. VMS64V	4TBV854197C0100	100% PE/N	4TBV854175C0100
		50% PE	4TBV854170C0100







N TOP / PE BOT		N 4TH POL TOP		N 4TH POL BOT	
4TBV854162C0100		4TBV854180C0100		4TBV854181C0100	
N.A. (cable)		N.A.		N.A.	
4TBV854165C0100		4TBV854185C0100		4TBV854186C0100	
N.A. (cable)		N.A.		N.A.	
4TBV854189C0100		4TBV854190C0100		4TBV854191C0100	
4TBV854171C0100		4TBV854195C0100		4TBV854196C0100	
100% PE/N	4TBV854176C0100	100% PE/N	N.A.	100% PE/N	N.A.
50% PE	4TBV854171C0100	50% PE	N.A.	50% PE	N.A.

VMS kits

Boxes for XT MCCBs

4TBV853534C0100

4TBV853572C0100

For MCCB XT 160-1250A installed on mounting plate

- Suitable only for fixed version of MCCB with rotary operating handle
- Base with four open sides without end plates
- PERTINAX mounting plates 5 mm
- Plates are pre-drilled and marked for correct positioning of devices
- Transparent cover with cut-out for handle shaft
- PE/N Terminals are not included (use selection table from following page)
- All enclosures are equipped with depth extension frame
- **It is mandatory to apply extra box for cable management when connecting XT3 - XT7 with incoming cables**

Additional info can be found in User Manual:

Description	External dimensions (HxWxD, mm)	Device type	Max quantity devices	Max device current, A	Type code	Order code	Pack, pcs.
VMS 33 for Tmax XT1/XT2	320 x 320 x 254	XT1/XT2	1	160	VB33HT-XT2-160/4	4TBV853532C0100	1
VMS 43V for Tmax XT3/XT4*	440 x 320 x 254	XT3/XT4*	1	250	VB43VT-XT4-250/4	4TBV853534C0100	1
VMS 63V for Tmax XT1/XT2	640 x 320 x 254	XT1/XT2	1	160	VB63VT-XT2-160/4	4TBV853535C0100	1
VMS 63V for Tmax XT3/XT4*	640 x 320 x 254	XT3/XT4*	1	250	VB63VT-XT4-250/4	4TBV853569C0100	1
VMS 63V for Tmax XT5 400A	640 x 320 x 254	XT5	1	400	VB63VT-XT5-400/4	4TBV853570C0100	1
VMS 64V for Tmax XT5/XT6 630A	640 x 440 x 254	XT5/XT6	1	630	VB64VT-XT5-630/4	4TBV853571C0100	1
VMS 64V for Tmax XT7**	640 x 440 x 329	XT7	1	1250	VB64VT-XT7-1250/4	4TBV853572C0100	1

* Please order special telescopic shaft for XT4 in VMS: 4TBV853850C0100
** 4TBV853572C0100 is equipped with two depth extension frames.
Cable connection set is required for attaching incoming cables to XT7 (refer to following pages for selection table).



4TBV853599C0100

Blast shield kits

- Blast shield kit is required for protecting busbar system from short-circuit caused by gas which is exhausted from MCCB in the event of tripping

Description	Device type / VMS BASE	Enclosure order code	Type code	Order code	Pack, pcs.
VMS 320mm XT1 Shield kit	XT1 / VMS33	4TBV853532C0100	VSK-XT1-320	4TBV853573C0100	1
VMS 320mm XT2 Shield kit	XT2 / VMS33	4TBV853532C0100	VSK-XT2-320	4TBV853574C0100	1
VMS 320mm XT1 Shield kit	XT1 / VMS63V	4TBV853535C0100	VSK-XT1-320	4TBV853573C0100	1
VMS 320mm XT2 Shield kit	XT2 / VMS63V	4TBV853535C0100	VSK-XT2-320	4TBV853574C0100	1
VMS 320mm XT3 Shield kit	XT3 / VMS43V	4TBV853534C0100	VSK-XT3-320	4TBV853575C0100	1
VMS 320mm XT4 Shield kit	XT4 / VMS43V	4TBV853534C0100	VSK-XT4-320	4TBV853576C0100	1
VMS 320mm XT3 Shield kit	XT3 / VMS63V	4TBV853569C0100	VSK-XT3-320	4TBV853575C0100	1
VMS 320mm XT4 Shield kit	XT4 / VMS63V	4TBV853569C0100	VSK-XT4-320	4TBV853576C0100	1
VMS 320mm XT5 Shield kit	XT5 / VMS63V	4TBV853570C0100	VSK-XT5-320	4TBV853599C0100	1
VMS 440mm XT5 Shield kit	XT5 / VMS64V	4TBV853571C0100	VSK-XT5-440	4TBV853600C0100	1
VMS 440mm XT6 Shield kit	XT6 / VMS64V	4TBV853571C0100	VSK-XT6-440	4TBV853601C0100	1
VMS 440mm XT7 Shield kit	XT7 / VMS64V	4TBV853572C0100	VSK-XT7-440	4TBV853609C0100	1

VMS kits

Boxes for XT MCCBs

Terminals

	Description	Device type	Enclosure order code	Nominal current, A	Type code	Order code	Pack, pcs.
4TBV853216C0100	VMS N feed-through terminal 160A CLAMP	XT1	4TBV853532C0100	160	VTM160FT-C	4TBV853216C0100	1
4TBV853700C0100	VMS N feed-through terminal 160A BOLT	XT1	4TBV853532C0100	160	VTM160FT-B	4TBV853700C0100	1
4TBV853216C0100	VMS N feed-through terminal 160A CLAMP	XT2	4TBV853535C0100	160	VTM160FT-C	4TBV853216C0100	1
4TBV853700C0100	VMS N feed-through terminal 160A BOLT	XT2	4TBV853535C0100	160	VTM160FT-B	4TBV853700C0100	1
4TBV853682C0100	VMS TERMINAL OT / XT 250A	XT3	4TBV853534C0100	250	VTM250	4TBV853682C0100	1
4TBV853682C0100	VMS TERMINAL OT / XT 250A	XT3	4TBV853569C0100	250	VTM250	4TBV853682C0100	1
4TBV853682C0100	VMS TERMINAL OT / XT 250A	XT4	4TBV853534C0100	250	VTM250	4TBV853682C0100	1
4TBV853682C0100	VMS TERMINAL OT / XT 250A	XT4	4TBV853569C0100	250	VTM250	4TBV853682C0100	1
4TBV853683C0100	VMS TERMINAL OT / XT 400A	XT5	4TBV853570C0100	400	VTM400	4TBV853683C0100	1

VMS kits

Boxes for XT MCCBs

	Description	Device type	Enclosure order code	Nominal current, A	Type code	Order code	Pack, pcs.
4TBV853685C0100	VMS TERMINAL OT / XT 630A	XT5	4TBV853571C0100	630	VTM630	4TBV853685C0100	1
4TBV853684C0100	VMS TERMINAL OT / XT 630A for 50% PE/N	XT5	4TBV853571C0100	400	VTM630-50	4TBV853684C0100	1
4TBV853687C0100	VMS TERMINAL OT / XT 800A	XT6	4TBV853571C0100	800	VTM800	4TBV853687C0100	1
4TBV853686C0100	VMS TERMINAL OT / XT 800A for 50% PE/N	XT6	4TBV853571C0100	400	VTM800-50	4TBV853686C0100	1
4TBV853690C0100	VMS TERMINAL OT / XT 1250A	XT7	4TBV853572C0100	1250	VTM1250	4TBV853690C0100	1
4TBV853688C0100	VMS TERMINAL OT / XT 1000A for 50% PE/N	XT7	4TBV853572C0100	500	VTM1000-50	4TBV853688C0100	1

VMS kits

Boxes for XT MCCBs

Order code	Description	Type code	Order code	Pack, pcs.
4TBV853850C0100	Telescopic shaft for XT4	VA-XT4S	4TBV853850C0100	1

4TBV854204C0100

4TBV854205C0100

XT7 cable connection kit

- Kit is used to connect incoming cables (feeders) to XT7 terminals
- Installation material (bolts, nuts) is included

Description	Type code	Order code	Pack, pcs.
1 pole/phase terminal kit for cable connection XT7	VA-TK-XT7	4TBV854204C0100	1
PE/PEN terminal kit for cable connection XT7	VA-TK-XT7-PEN	4TBV854205C0100	1

VMS kits

Connecting busbars for XT MCCBs

4TBV854258C0100

4TBV854259C0100

4TBV854260C0100

4TBV854261C0100

4TBV854262C0100

4TBV854263C0100

4TBV854264C0100

4TBV854265C0100

Device type	Enclosure order code	VMS box type	Type of network	Application	Application vs MBB position*
XT2	4TBV853532C0100	VMS33	TN-C / TN-S	PHASE L1-L3	TOP
			TN-C / TN-S	PHASE L1-L3	BOTTOM
			TN-S	PE/N 100%	PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
			TN-C	PEN 100%	PEN : TOP / BOTTOM
XT2	4TBV853535C0100	VMS63V	TN-C / TN-S	PHASE L1-L3	TOP
			TN-C / TN-S	PHASE L1-L3	BOTTOM
			TN-S	PE/N 100%	PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
			TN-C	PEN 100%	PEN : TOP / BOTTOM

* Position of Main Busbars (MBB) relative to selected enclosure. TOP is when MBB is located above enclosure, BOTTOM is below
Check following pages for illustrative guide

4TBV854284C0100

4TBV854285C0100

For MCCB Tmax XT

(Kits are applicable only to parallel busbar systems)

- Connection of incoming/outgoing moulded case circuit breakers Tmax XT to main busbar system
- Without fastening materials

Connecting blocks and T-bolts can be selected Busbar system: parallel configuration

Drawings for busbars can be found in ABB Library

Busbar kit order code	Type code	Description	Cross-section, mm x mm	Nominal current, A	Pack, pcs.
4TBV854214C0100	VC33-XT2-160-P	Busbar kit for connecting XT2 160A in VMS33 if MBB L1-L3 position is TOP	20 x 2	160	3
4TBV854215C0100	VC33-XT2-160-P	Busbar kit for connecting XT2 160A in VMS33 if MBB L1-L3 position is BOTTOM	20 x 2	160	3
4TBV854216C0100	VC33-XT2-160-PE-T/N-B	Busbar kit for connecting XT2 160A PE_N Terminal 160A in VMS33 if MBB PE position is TOP or MBB N position is BOTTOM, 100% load capacity	20 x 2	160	1
4TBV854217C0100	VC33-XT2-160-N-T/PE-B	Busbar kit for connecting XT2 160A PE_N Terminal 160A in VMS33 if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	20 x 2	160	1
4TBV854218C0100	VC33-XT2-160-N-T	Busbar kit for connecting 4th pole (N) XT2 160A in VMS33 if MBB N position is TOP	20 x 2	160	1
4TBV854219C0100	VC33-XT2-160-N-B	Busbar kit for connecting 4th pole (N) XT2 160A in VMS33 if MBB N position is BOTTOM	20 x 2	160	1
4TBV854282C0100	VLPEN-160	Link for connecting PE rail to N rail in order to make PEN joint 160A	20 x 2	160	1
4TBV854220C0100	VC63V-XT2-160-P	Busbar kit for connecting XT2 160A in VMS63V if MBB L1-L3 position is TOP	20 x 2	160	3
4TBV854221C0100	VC63V-XT2-160-P	Busbar kit for connecting XT2 160A in VMS63V if MBB L1-L3 position is BOTTOM	20 x 2	160	3
4TBV854222C0100	VC63V-XT2-160-PE-T/N-B	Busbar kit for connecting XT2 160A PE_N Terminal 160A in VMS63V if MBB PE position is TOP or MBB N position is BOTTOM, 100% load capacity	20 x 2	160	1
4TBV854223C0100	VC63V-XT2-160-N-T/PE-B	Busbar kit for connecting XT2 160A PE_N Terminal 160A in VMS63V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	20 x 2	160	1
4TBV854224C0100	VC63V-XT2-160-N-T	Busbar kit for connecting 4th pole (N) XT2 160A in VMS63V if MBB N position is TOP	20 x 2	160	1
4TBV854225C0100	VC63V-XT2-160-N-B	Busbar kit for connecting 4th pole (N) XT2 160A in VMS63V if MBB N position is BOTTOM	20 x 2	160	1
4TBV854282C0100	VLPEN-160	Link for connecting PE rail to N rail in order to make PEN joint 160A	20 x 2	160	1

VMS kits

Connecting busbars for XT MCCBs

Device type	Enclosure order code	VMS box type	Type of network	Application	Application vs MBB position*
XT3	4TBV853534C0100	VMS43V	TN-C / TN-S	PHASE L1-L3	TOP
			TN-C / TN-S	PHASE L1-L3	BOTTOM
			TN-S	PE/N 100%	PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
			TN-C	PEN 100%	PEN : TOP / BOTTOM
XT3	4TBV853569C0100	VMS63V	TN-C / TN-S	PHASE L1-L3	TOP
			TN-C / TN-S	PHASE L1-L3	BOTTOM
			TN-S	PE/N 100%	PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
			TN-C	PEN 100%	PEN : TOP / BOTTOM
XT4	4TBV853534C0100	VMS43V	TN-C / TN-S	PHASE L1-L3	TOP
			TN-C / TN-S	PHASE L1-L3	BOTTOM
			TN-S	PE/N 100%	PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
			TN-C	PEN 100%	PEN : TOP / BOTTOM
XT4	4TBV853569C0100	VMS63V	TN-C / TN-S	PHASE L1-L3	TOP
			TN-C / TN-S	PHASE L1-L3	BOTTOM
			TN-S	PE/N 100%	PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
			TN-C	PEN 100%	PEN : TOP / BOTTOM

* Position of Main Busbars (MBB) relative to selected enclosure. TOP is when MBB is located above enclosure, BOTTOM is below
Check following pages for illustrative guide

Busbar kit order code	Type code	Description	Cross-section, mm x mm	Nominal current, A	Pack, pcs.
4TBV854226C0100	VC43V-XT3-250-P	Busbar kit for connecting XT3 250A in VMS43V if MBB L1-L3 position is TOP	25 x 3	250	3
4TBV854227C0100	VC43V-XT3-250-P	Busbar kit for connecting XT3 250A in VMS43V if MBB L1-L3 position is BOTTOM	25 x 3	250	3
4TBV854228C0100	VC43V-XT3/4-250-PE-T/N-B	Busbar kit for connecting XT3/XT4 250A PE_N Terminal 250A in VMS43V if MBB PE position is TOP or MBB N position is BOTTOM, 100% load capacity	25 x 3	250	1
4TBV854229C0100	VC43V-XT3/4-250-N-T/PE-B	Busbar kit for connecting XT3/XT4 250A PE_N Terminal 250A in VMS43V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	20 x 4	250	1
4TBV854230C0100	VC43V-XT3-250-N-T	Busbar kit for connecting 4th pole (N) XT3 250A in VMS43V if MBB N position is TOP	25 x 3	250	1
4TBV854231C0100	VC43V-XT3-250-N-B	Busbar kit for connecting 4th pole (N) XT3 250A in VMS43V if MBB N position is BOTTOM	25 x 3	250	1
4TBV854283C0100	VLPEN-250	Link for connecting PE rail to N rail in order to make PEN joint 250A	25 x 3	250	1
4TBV854232C0100	VC63V-XT3-250-P	Busbar kit for connecting XT3 250A in VMS63V if MBB L1-L3 position is TOP	25 x 3	250	3
4TBV854233C0100	VC63V-XT3-250-P	Busbar kit for connecting XT3 250A in VMS63V if MBB L1-L3 position is BOTTOM	25 x 3	250	3
4TBV854234C0100	VC63V-XT3/4-250-PE-T/N-B	Busbar kit for connecting XT3/XT4 250A PE_N Terminal 250A in VMS63V if MBB PE position is TOP or MBB N position is BOTTOM, 100% load capacity	25 x 3	250	1
4TBV854235C0100	VC63V-XT3/4-250-N-T/PE-B	Busbar kit for connecting XT3/XT4 250A PE_N Terminal 250A in VMS63V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	20 x 4	250	1
4TBV854236C0100	VC63V-XT3-250-N-T	Busbar kit for connecting 4th pole (N) XT3 250A in VMS63V if MBB N position is TOP	25 x 3	250	1
4TBV854237C0100	VC63V-XT3-250-N-B	Busbar kit for connecting 4th pole (N) XT3 250A in VMS63V if MBB N position is BOTTOM	25 x 3	250	1
4TBV854283C0100	VLPEN-250	Link for connecting PE rail to N rail in order to make PEN joint 250A	25 x 3	250	1
4TBV854238C0100	VC43V-XT4-250-P	Busbar kit for connecting XT4 250A in VMS43V if MBB L1-L3 position is TOP	25 x 3	250	3
4TBV854239C0100	VC43V-XT4-250-P	Busbar kit for connecting XT4 250A in VMS43V if MBB L1-L3 position is BOTTOM	25 x 3	250	3
4TBV854228C0100	VC43-XT3/4250T-PEN/N	Busbar kit for connecting XT3/XT4 250A PE_N Terminal 160A in VMS43V if MBB PE position is TOP or MBB N position is BOTTOM, 100% load capacity	25 x 3	250	1
4TBV854229C0100	VC43-XT3/4250B-N/PEN	Busbar kit for connecting XT3/XT4 250A PE_N Terminal 160A in VMS43V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	20 x 4	250	1
4TBV854242C0100	VC43V-XT4-250-N-T	Busbar kit for connecting 4th pole (N) XT4 250A in VMS43V if MBB N position is TOP	25 x 3	250	1
4TBV854243C0100	VC43V-XT4-250-N-B	Busbar kit for connecting 4th pole (N) XT4 250A in VMS43V if MBB N position is BOTTOM	25 x 3	250	1
4TBV854283C0100	VLPEN-250	Link for connecting PE rail to N rail in order to make PEN joint 250A	25 x 3	250	1
4TBV854244C0100	VC63V-XT4-250-P	Busbar kit for connecting XT4 250A in VMS63V if MBB L1-L3 position is TOP	25 x 3	250	3
4TBV854245C0100	VC63V-XT4-250-P	Busbar kit for connecting XT4 250A in VMS63V if MBB L1-L3 position is BOTTOM	25 x 3	250	3
4TBV854234C0100	VC63-XT3/4250T-PEN/N	Busbar kit for connecting XT3/XT4 250A PE_N Terminal 250A in VMS63V if MBB PE position is TOP or MBB N position is BOTTOM, 100% load capacity	20 x 4	250	1
4TBV854235C0100	VC63-XT3/4250B-N/PEN	Busbar kit for connecting XT3/XT4 250A PE_N Terminal 250A in VMS63V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	25 x 3	250	1
4TBV854248C0100	VC63V-XT4-250-N-T	Busbar kit for connecting 4th pole (N) XT4 250A in VMS63V if MBB N position is TOP	25 x 3	250	1
4TBV854249C0100	VC63V-XT4-250-N-B	Busbar kit for connecting 4th pole (N) XT4 250A in VMS63V if MBB N position is BOTTOM	25 x 3	250	1
4TBV854283C0100	VLPEN-250	Link for connecting PE rail to N rail in order to make PEN joint 250A	25 x 3	250	1

VMS kits

Connecting busbars for XT MCCBs

Device type	Enclosure order code	VMS box type	Type of network	Application	Application vs MBB position*
XT5	4TBV853570C0100	VMS63V	TN-C / TN-S	PHASE L1-L3	TOP
			TN-C / TN-S	PHASE L1-L3	BOTTOM
			TN-S	PE/N 100%	PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
			TN-C	PEN 100%	PEN : TOP / BOTTOM
XT5	4TBV853571C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	TOP
			TN-C / TN-S	PHASE L1-L3	BOTTOM
			TN-S	PE/N 50%	PE : TOP N: BOTTOM
			TN-S	PE/N 50%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
			TN-C	PEN 100%	PEN : TOP / BOTTOM
			TN-C	PEN 50%	PEN : TOP / BOTTOM

* Position of Main Busbars (MBB) relative to selected enclosure. TOP is when MBB is located above enclosure, BOTTOM is below
Check following pages for illustrative guide

Busbar kit order code	Type code	Description	Cross-section, mm x mm	Nominal current, A	Pack, pcs.
4TBV854250C0100	VC63V-XT5-400-P	Busbar kit for connecting XT5 400A in VMS63V if MBB L1-L3 position is TOP	30 x 5	400	3
4TBV854251C0100	VC63V-XT5-400-P	Busbar kit for connecting XT5 400A in VMS63V if MBB L1-L3 position is BOTTOM	30 x 5	400	3
4TBV854254C0100	VC63V-XT5-400-PE-T/N-B	Busbar kit for connecting XT5 400A PE_N Terminal 400A in VMS63V if MBB PE position is TOP or MBB N position is BOTTOM, 100% load capacity	30 x 5	400	1
4TBV854255C0100	VC63V-XT5-400-N-T/PE-B	Busbar kit for connecting XT5 400A PE_N Terminal 400A in VMS63V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	25 x 6	400	1
4TBV854256C0100	VC63V-XT5-400-N-T	Busbar kit for connecting 4th pole (N) XT5 400A in VMS63V if MBB N position is TOP	30 x 5	400	1
4TBV854257C0100	VC63V-XT5-400-N-B	Busbar kit for connecting 4th pole (N) XT5 400A in VMS63V if MBB N position is BOTTOM	30 x 5	400	1
4TBV854284C0100	VLPEN-400	Link for connecting PE rail to N rail in order to make PEN joint 400A	30 x 5	400	1
4TBV854258C0100	VC64V-XT5-400-P	Busbar kit for connecting XT5 630A in VMS64V if MBB L1-L3 position is TOP	30 x 10	630	3
4TBV854259C0100	VC64V-XT5-400-P	Busbar kit for connecting XT5 630A in VMS64V if MBB L1-L3 position is BOTTOM	30 x 10	630	3
4TBV854260C0100	VC64V-XT5-400-PE-T/N-B-0.5	Busbar kit for connecting XT5 630A PE_N Terminal 630A in VMS64V if MBB PE position is TOP or MBB N position is BOTTOM, 50% load capacity	30 x 5	400	1
4TBV854261C0100	VC64V-XT5-400-N-T/PE-B-0.5	Busbar kit for connecting XT5 630A PE_N Terminal 630A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 50% load capacity	30 x 5	400	1
4TBV854262C0100	VC64V-XT5-400-PE-T/N-B	Busbar kit for connecting XT5 630A PE_N Terminal 400A in VMS64V if MBB PE position is TOP or MBB N position is BOTTOM, 100% load capacity	30 x 10	630	1
4TBV854263C0100	VC64V-XT5-400-N-T/PE-B	Busbar kit for connecting XT5 630A PE_N Terminal 400A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	30 x 10	630	1
4TBV854264C0100	VC64V-XT5-400-N-T	Busbar kit for connecting 4th pole (N) XT5 630A in VMS64V if MBB N position is TOP	30 x 10	630	1
4TBV854265C0100	VC64V-XT5-400-N-B	Busbar kit for connecting 4th pole (N) XT5 630A in VMS64V if MBB N position is BOTTOM	30 x 10	630	1
4TBV854285C0100	VLPEN-630	Link for connecting PE rail to N rail in order to make PEN joint 630A	30 x 10	630	1
4TBV854284C0100	VLPEN-400	Link for connecting PE rail to N rail in order to make PEN joint 400A	30 x 5	400	1

VMS kits

Connecting busbars for XT MCCBs

Device type	Enclosure order code	VMS box type	Type of network	Application	Application vs MBB position*
XT6	4TBV853571C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	TOP
			TN-C / TN-S	PHASE L1-L3	BOTTOM
			TN-S	PE/N 50%	PE : TOP N: BOTTOM
			TN-S	PE/N 50%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
			TN-C	PEN 100%	PEN : TOP / BOTTOM
			TN-C	PEN 50%	PEN : TOP / BOTTOM
XT7	4TBV853572C0100	VMS64V	TN-C / TN-S	PHASE L1-L3	TOP
			TN-C / TN-S	PHASE L1-L3	BOTTOM
			TN-S	PE/N 50%	PE : TOP N: BOTTOM
			TN-S	PE/N 50%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	PE : TOP N: BOTTOM
			TN-S	PE/N 100%	PE : BOTTOM N: TOP
			TN-S	PE/N 100%	N 4th pole: TOP
			TN-S	PE/N 100%	N 4th pole: BOTTOM
			TN-C	PEN 100%	PEN : TOP / BOTTOM
			TN-C	PEN 50%	PEN : TOP / BOTTOM

* Position of Main Busbars (MBB) relative to selected enclosure. TOP is when MBB is located above enclosure, BOTTOM is below
Check following pages for illustrative guide

Busbar kit order code	Type code	Description	Cross-section, mm x mm	Nominal current, A	Pack, pcs.
4TBV854266C0100	VC64V-XT6-800-P	Busbar kit for connecting XT6 800A in VMS64V if MBB L1-L3 position is TOP	40 x 10	800	3
4TBV854267C0100	VC64V-XT6-800-P	Busbar kit for connecting XT6 800A in VMS64V if MBB L1-L3 position is BOTTOM	40 x 10	800	3
4TBV854268C0100	VC64V-XT6-800-PE-T/ N-B-0.5	Busbar kit for connecting XT6 800A PE_N Terminal 630A in VMS64V if MBB PE position is TOP or MBB N position is BOTTOM, 50% load capacity	20 x 10	630	1
4TBV854269C0100	VC64V-XT6-800-N-T/ PE-B-0.5	Busbar kit for connecting XT6 800A PE_N Terminal 630A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 50% load capacity	20 x 10	500	1
4TBV854270C0100	VC64V-XT6-800-PE-T/ N-B	Busbar kit for connecting XT6 800A PE_N Terminal 800A in VMS64V if MBB PE position is TOP or MBB N position is BOTTOM, 100% load capacity	40 x 10	800	1
4TBV854271C0100	VC64V-XT6-800-N-T/ PE-B	Busbar kit for connecting XT6 800A PE_N Terminal 800A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	40 x 10	800	1
4TBV854272C0100	VC64V-XT6-800-N-T	Busbar kit for connecting 4th pole (N) XT6 800A in VMS64V if MBB N position is TOP	40 x 10	800	1
4TBV854273C0100	VC64V-XT6-800-N-B	Busbar kit for connecting 4th pole (N) XT6 800A in VMS64V if MBB N position is BOTTOM	40 x 10	800	1
4TBV854286C0100	VLPEN-800	Link for connecting PE rail to N rail in order to make PEN joint 800A	40 x 10	800	1
4TBV854285C0100	VLPEN-630	Link for connecting PE rail to N rail in order to make PEN joint 630A	20 x 10	630	1
4TBV854274C0100	VC64V-XT7-1250-P	Busbar kit for connecting XT7 1250A in VMS64V if MBB L1-L3 position is TOP	50 x 15	1250	3
4TBV854275C0100	VC64V-XT7-1250-P	Busbar kit for connecting XT7 1250A in VMS64V if MBB L1-L3 position is BOTTOM	50 x 15	1250	3
4TBV854276C0100	VC64V-XT7-1250-PE-T/ N-B-0.5	Busbar kit for connecting XT7 1250A PE_N Terminal 1000A in VMS64V if MBB PE position is TOP or MBB N position is BOTTOM, 50% load capacity	30 x 10	630	1
4TBV854277C0100	VC64V-XT7-1250-N-T/ PE-B-0.5	Busbar kit for connecting XT7 1250A PE_N Terminal 1000A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 50% load capacity	30 x 10	630	1
4TBV854278C0100	VC64V-XT7-1250-PE-T/ N-B	Busbar kit for connecting XT7 1250A PE_N Terminal 1250A in VMS64V if MBB PE position is TOP or MBB N position is BOTTOM, 100% load capacity	50 x 15	1250	1
4TBV854279C0100	VC64V-XT7-1250-N-T/ PE-B	Busbar kit for connecting XT7 1250A PE_N Terminal 1250A in VMS64V if MBB PE position is BOTTOM or MBB N position is TOP, 100% load capacity	50 x 15	1250	1
4TBV854280C0100	VC64V-XT7-1250-N-T	Busbar kit for connecting 4th pole (N) XT7 1250A in VMS64V if MBB N position is TOP	50 x 15	1250	1
4TBV854281C0100	VC64V-XT7-1250-N-B	Busbar kit for connecting 4th pole (N) XT7 1250A in VMS64V if MBB N position is BOTTOM	50 x 15	1250	1
4TBV854288C0100	VLPEN-1100	Link for connecting PE rail to N rail in order to make PEN joint 1250A	50 x 15	1250	1
4TBV854287C0100	VLPEN-1000	Link for connecting PE rail to N rail in order to make PEN joint 1000A	30 x 10	630	1

VMS kits

Connecting busbars for XT MCCBs







Device/VMS BOX	PHASE 1-3 (TOP)	PHASE 1-3 (BOTTON)	N 4TH POL (TOP)
XT1 / VMS33	N.A.	N.A.	N.A.
XT2 / VMS33	4TBV854214C0100	4TBV854215C0100	4TBV854218C0100
XT1 / VMS63V	N.A.	N.A.	N.A.
XT2 / VMS63V	4TBV854220C0100	4TBV854221C0100	4TBV854224C0100
XT3 / VMS43V	4TBV854226C0100	4TBV854227C0100	4TBV854230C0100
XT4 / VMS43V	4TBV854238C0100	4TBV854239C0100	4TBV854242C0100
XT3 / VMS63V	4TBV854232C0100	4TBV854233C0100	4TBV854236C0100
XT4 / VMS63V	4TBV854244C0100	4TBV854245C0100	4TBV854248C0100
XT5 / VMS63V	4TBV854250C0100	4TBV854251C0100	4TBV854256C0100
XT5 / VMS64V	4TBV854258C0100	4TBV854259C0100	4TBV854264C0100
XT6 / VMS64V	4TBV854266C0100	4TBV854267C0100	4TBV854272C0100
XT7 / VMS64V	4TBV854274C0100	4TBV854275C0100	4TBV854280C0100









N 4TH POL (BOTTON)	PE TOP / N BOT		N TOP / PE BOT		PEN	
N.A.	N.A.		N.A.		4TBV854282C0100	
4TBV854219C0100	4TBV854216C0100		4TBV854217C0100		4TBV854282C0100	
N.A.	N.A.		N.A.		4TBV854282C0100	
4TBV854225C0100	4TBV854222C0100		4TBV854223C0100		4TBV854282C0100	
4TBV854231C0100	4TBV854228C0100		4TBV854229C0100		4TBV854282C0100	
4TBV854243C0100	4TBV854228C0100		4TBV854229C0100		4TBV854282C0100	
4TBV854237C0100	4TBV854234C0100		4TBV854235C0100		4TBV854282C0100	
4TBV854249C0100	4TBV854234C0100		4TBV854235C0100		4TBV854282C0100	
4TBV854257C0100	4TBV854254C0100		4TBV854255C0100		4TBV854282C0100	
4TBV854265C0100	100% PE/N	4TBV854262C0100	100% PE/N	4TBV854263C0100	100% PE/N	4TBV854285C0100
	50% PE	4TBV854262C0100	50% PE	4TBV854261C0100	50% PE	4TBV854284C0100
4TBV854273C0100	100% PE/N	4TBV854270C0100	100% PE/N	4TBV854271C0100	100% PE/N	4TBV854286C0100
	50% PE	4TBV854268C0100	50% PE	4TBV854269C0100	50% PE	4TBV854285C0100
4TBV854281C0100	100% PE/N	4TBV854278C0100	100% PE/N	4TBV854279C0100	100% PE/N	4TBV854288C0100
	50% PE	4TBV854276C0100	50% PE	4TBV854277C0100	50% PE	4TBV854287C0100

VMS kits

Boxes for Inline II switch disconnectors

4TBV853052C0100

For InLine II NH00-100 fuse switch disconnector

- For 3-pole devices
- Base with four open sides without end plates
- With busbar holders for 3f + N + PE (max. 400A)
- For 5-pole, horizontally arranged busbars
- Busbar center distance 100 mm
- With 25 x 8 mm busbars
- Busbars are included
- Cover plate is not included and must be selected from next page

Additional info can be found in User Manual:

Description	External dimensions (HxWxD, mm)	Device type	Max quantity devices*	Max device current, A	Fuse type	Type code	Order code	Pack, pcs.
VMS 63V for 4x InLine II NH00-100	640 x 320 x 179	InLine II NH00-100	4	160	NH00	VB63VT-Z160/3	4TBV853051C0100	1
VMS 64V for 6x InLine II NH00-100	640 x 440 x 179	InLine II NH00-100	6	160	NH00	VB64VT-Z160/3	4TBV853052C0100	1

* By determining quantity of devices per enclosure use RDF values from table 101 of IEC 61439-2

VMS kits

Boxes for Inline II switch disconnectors

Accessories

	Description	Type code	Order code	Pack, pcs.
4TBV853208C0100	VMS 63V cover plate for 4TBV853051C0100	VA-CP63V-Z00	4TBV853208C0100	1
4TBV853209C0100	VMS 64V cover plate for 4TBV853052C0100	VA-CP64V-Z00	4TBV853209C0100	1
4TBV853211C0100	Busbar coupling kit (for busbar connection between adjacent enclosures)	VA-BC-Z00	4TBV853211C0100	1
ZX964	50mm blanking panel for closing off unused space in cover plates	ZX964	2CPX042238R9999	1

VMS kits

Boxes for S750 and SPD installed on busbars

4TBV853212C0100

4TBV853343C0100

Enclosures for S750 and SPD device mounted on busbars

- For 3-pole devices
- Base with four open sides without end plates
- With busbar holders 2CPX062638R9999 (ZX95P2) for 3f + N + PE
- Busbar center distance 40 mm
- Suitable for 5-pole system with 12 x 5 mm busbars
- Busbars are included
- With hinged cover or fixed cover-plate

Description	External dimensions (HxWxD, mm)	Device type	Max quantity devices*	Max device current, A	Type code	Order code	Pack, pcs.
VMS 33 with 40mm busbar system 250A for S750 and SPD with hinged pivoting cover	320 x 320 x 179	S750 / SPD	2 x S750 + 1 x SPD	80	VB33HP-SP250	4TBV853212C0100	1
VMS 33 with 40mm busbar system 250A for S750 and SPD with fixed cover-plate	320 x 320 x 179	S750 / SPD	2 x S750 + 1 x SPD	80	VB33HT-SP250	4TBV853343C0100	1

* By determining quantity of devices per enclosure use RDF values from table 101 of IEC 61439-2

Spare parts and accessories

	Description	Type code	Order code	Pack, pcs.
ZX95P2	ZX95P2 ZX Busbar holder, 182 mm x 18 mm x 8 mm	ZX95P2	2CPX062638R9999	1

VMS kits

Boxes for meters and energy analyzers

4TBV853250C0100

4TBV853251C0100

4TBV854253C0100

For meter with three-point attachment on counter carrying plate

- Base with four open sides without end plates
- Mounting plate for kWh-meter

Description	External dimensions (HxWxD, mm)	Device type	Max quantity devices	Type code	Order code	Pack, pcs.
VMS 43V with cross-plate for energy meter	440 x 320 x 179	energy meter	1	V43BWKJ6	4TBV853250C0100	1
VMS 63V with cross-plate for energy meter	640 x 320 x 179	energy meter	1	V63BWKJ6	4TBV853251C0100	1
VMS 43V with plate for meter + cover	440 x 320 x 179	energy meter	1	VF43HT-QR	4TBV854206C0100	1
VMS 63V with plate for meter + cover	640 x 320 x 179	energy meter	1	VF63HT-QR	4TBV854253C0100	1



4TBV854240C0100

4TBV854241C0100

For digital meters

- Base with four open sides without end plates
- **BKE-I adaptor is not included and should be ordered separately**
- Transparent cover
- With touch protection plate

Description	External dimensions (HxWxD, mm)	Device type	Max quantity devices	Type code	Order code	Pack, pcs.
VMS 33 for 1x eHZ digital meter	320 x 320 x 179	eHZ meter	1	VB33TDM1	4TBV854240C0100	1
VMS 33 for 2x eHZ digital meter	320 x 320 x 179	eHZ meter	2	VB33TDM2	4TBV854241C0100	1



4TBV854246C0100

For digital analyzers

- 96 x 96 mm devices (i.e. network analyzers M4M)
- Base with four open sides without end plates
- With transparent cover installed by hinged screws
- With touch protection plate

Description	External dimensions (HxWxD, mm)	Device type	Max quantity devices	Type code	Order code	Pack, pcs.
VMS 33 for digital analyzer	320 x 320 x 179	96x96 mm network analyzers	1	VB33TDA1	4TBV854246C0100	1

Busbar system

Possible configurations

There are two possible configurations for organizing busbar systems based on spatial orientation of busbars: flat and parallel. The choice of configuration will determine the selection of busbar supports and connection options.

Parallel configuration: up to 1100 A

Flat configuration: up to 630 A

There are two possible configurations for organizing busbar systems based on spatial orientation of busbars: flat and parallel. The choice of configuration will determine the selection of busbar supports and connection options.

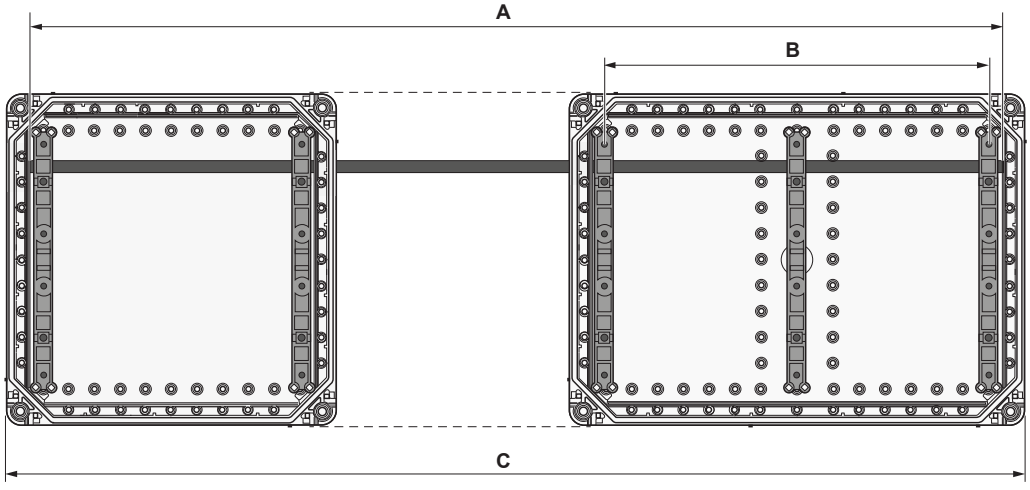

A: Length of the busbar copper = Total width of all bases (busbar compartment) - 5 mm.

B: Max. distance between two busbar supports depends on required Icw rating. Please refer to the following for additional info.

C: Total width of all bases (busbar compartment).

User Manual:

Please refer to pages 5-8 in System Manual for additional info about busbar supports installation and usage.

Busbar system

Parallel configurations: busbar supports

Spare parts and accessories

	Description	N/PE load*, %	Rated I_n max.*	Type code	Order code	Pack, pcs.
4TBV854315C0100	**Busbar support for parallel/flat configurations** In: 250 A - 400 A Fastening elements are included in delivery kit. Busbar support is universal and can be used for both types of configurations.	100%	400 A	VXXSWNG5	4TBV854315C0100	10
4TBV853075C0100	**Busbar support for parallel/flat configurations** In: 250 A Fastening elements are included in delivery kit. Busbar support is universal and can be used for both types of configurations.	100%	250 A	VXXSWNE5	4TBV853075C0100	10
4TBV853076C0100	**Busbar support for parallel/flat configurations** In: 400 A Fastening elements are included in delivery kit. Busbar support is universal and can be used for both types of configurations.	50%	400 A	VXXSWNF5	4TBV853076C0100	10
4TBV855177C0100	**Busbar support for parallel configurations** In: 850 A - 1100 A Fastening elements are included in delivery kit.	100%	1100A	VXBB855177N	4TBV855177C0100	10
4TBV853077C0100	**Busbar support for parallel configurations** In: 850 A - 1100 A Fastening elements are included in delivery kit.	50%	1100A	VXXSWNI5	4TBV853077C0100	10

* Specified characteristics are valid for parallel configurations only. Detailed information about applicable busbar crosssections, rated current, max. distance, Icw, etc. is located on next pages

Busbar system

Parallel configurations: busbar supports

Order code	4TBV854315C0100		4TBV855177C0100	
Rated nominal current In (A)	**250**	**400**	**850**	**1100**
Center distance between phase busbars (mm)	50	50	50	50
Center distance between N/PE and phase busbar (mm)	45	45	50	50
Busbars				
Qty x cross section of phase busbar (mm x mm)	2 x (12 x 5)	2 x (20 x 5)	2 x (20 x 10)	2 x (30 x 10)
Qty x cross section of N/PE busbar (mm x mm)	2 x (12 x 5)	2 x (20 x 5)	2 x (20 x 10)	2 x (30 x 10)
N/PE load capacity	100%	100%	100%	100%
Dynamic short-circuit resistance				
Max. distance between busbar supports (mm)	320	320	320/250	320
Icw phase busbar (kA), 1 sec	15	21	22/25	25
Ipk phase busbar (kA), 1 sec	31	45	46/54,8	54,8

	4TBV853077C0100	4TBV853075C0100	4TBV853076C0100
850	**1100**	**250**	**400**
50	50	50	50
45	45	45	45
2 x (20 x 10)	2 x (30 x 10)	2 x (12 x 5)	2 x (20 x 5)
2 x (20 x 5)	2 x (30 x 5)	2 x (12 x 5)	2 x (12 x 5)
50%	50%	100%	50%
320/250	320	320	320
20,8/25	25	15	20
43,6/52,5	53	31	42

Busbar system

Parallel configurations: connection to busbars

Connections from devices and PE/N terminals to parallel configurations can be done with connecting busbars (A) or cables (B) without punching operations through the help of contact blocks and T-bolts. Wing contact blocks offer additional in making outgoing connections trough cable-clamps (C)

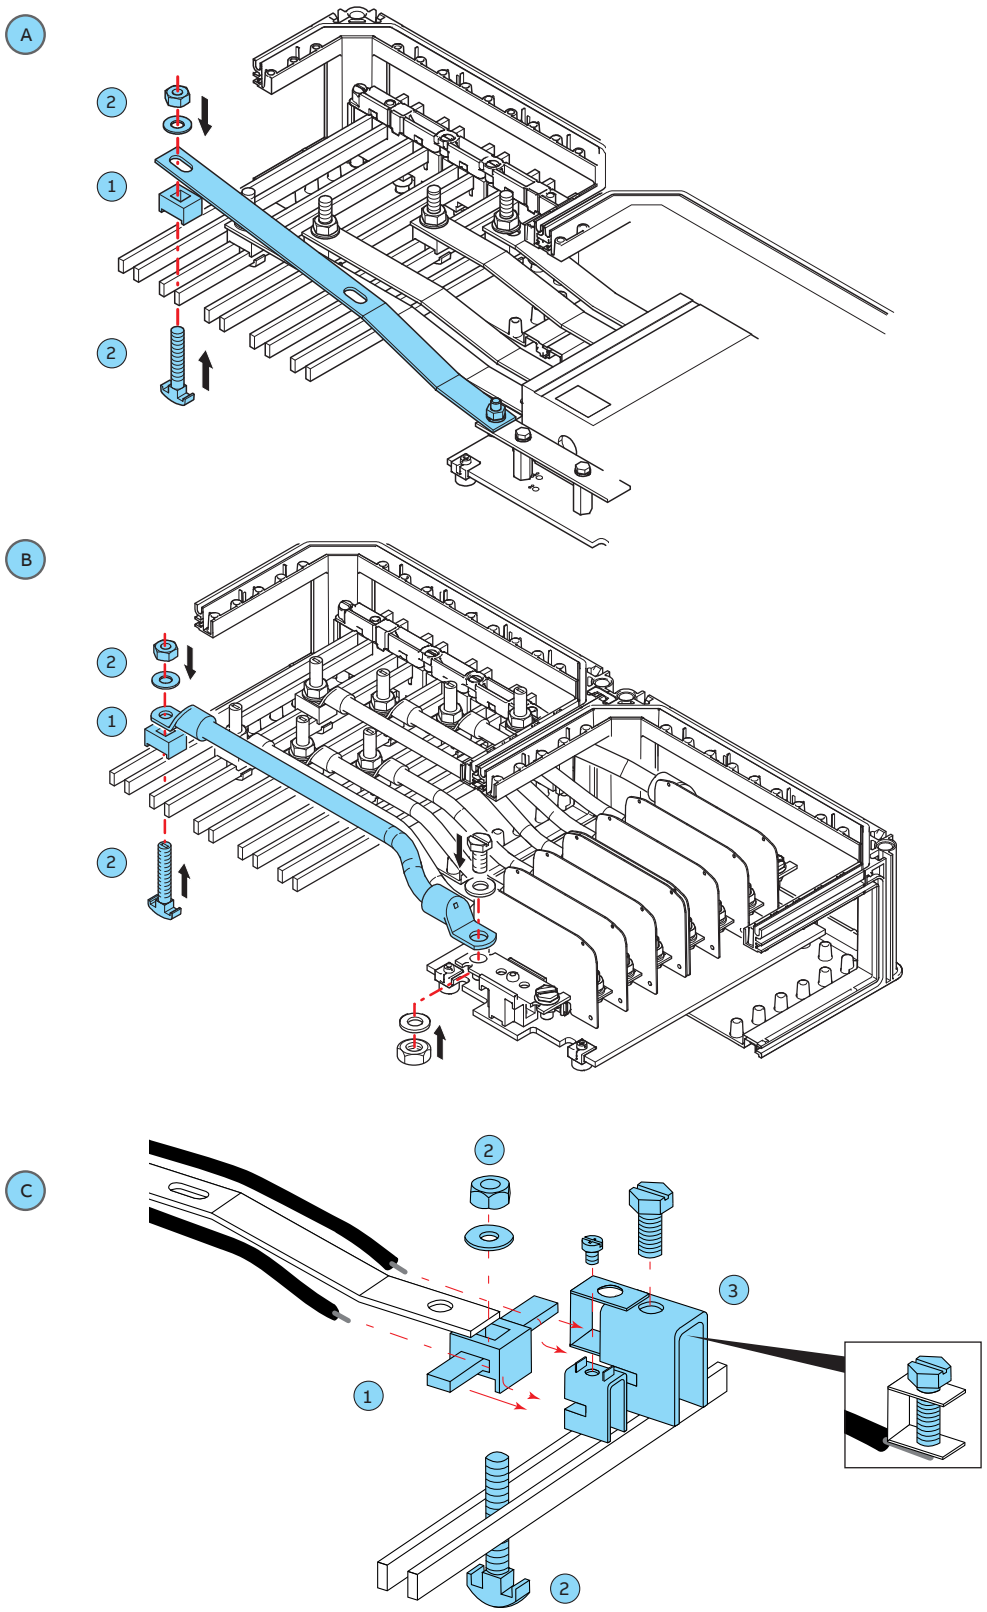

Legend:

1 Contact block
2 T-bolt + nut/ washer
3 Cable Clamps

Busbar system

Parallel configurations: connection to busbars

4TBO858003C0100

4TBO858004C0100

4TBO858005C0100

4TBO858006C0100

A Contact blocks for busbars and lugged cables









Type code	Order code	Pack
For connecting busbars with widths of 25, 30, 40 or 50* mm		
APACC858003	4TBO858003C0100	10
For connecting busbars with widths of 20 or 25** mm		
APACC858004	4TBO858004C0100	10
For connecting busbars with widths of 20 mm		
APACC858005	4TBO858005C0100	10

Wing contact blocks for lugged/unlugged cables 16-35-70-120 mm²





Type code	Order code	Pack
APACC858006	4TBO858006C0100	10
APACC858007	4TBO858007C0100	10

B T-bolt kit with nut and washer



For 5mm thick bars		
M10x60		
APACC858008	4TBO858008C0100	10
M10x80		
APACC858010	4TBO858010C0100	10





For 10mm thick bars		
M10x60		
APACC858013	4TBV858013C0100	10
M10x80		
APACC858011	4TBO858011C0100	10



b	s	x	L
12	5	40	60
12	10	45	60
20	5	48	60
20	10	53	60
30	5	58	60
30	10	63	80

T-bolt kit with nut and washer

For 5mm thick rails		
M10x60		
APACC858008	4TBO858008C0100	10
M10x80		
APACC858010	4TBO858010C0100	10





For 10mm thick rails		
M10x60		
APACC858013	4TBV858013C0100	10
M10x80		
APACC858011	4TBO858011C0100	10



b	s	x	L
12	-	42	60
12	5	47	60
12	10	52	60
20	-	50	60
20	5	55	60
20	10	60	60
30	-	60	60
30	5	65	80
30	10	70	80

Legend:
b: height of rectangular bars
s: thickness of the rectangular bar or cable-shoe or flat copper
X: minimum bolt length required
L: length of fitting T-bolt
* For OT1250 with 60x10 connecting busbars please use 2 blocks per busbar
** For XT7 with 50x15 connecting busbars please use 2 blocks per busbar

C Cable clamps for connecting unlugged cables to the contact block wings

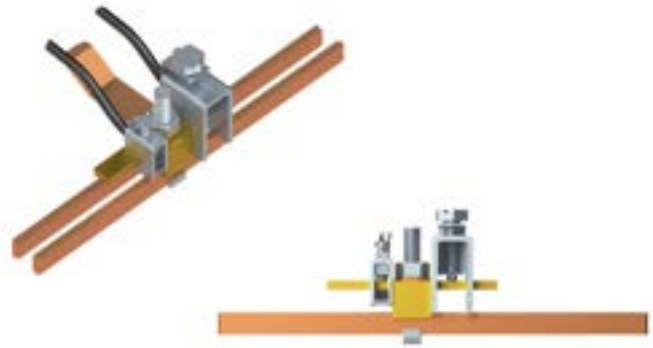

Cable section mm²) Min.	Cable section mm²) Max.	Clamp width X (mm)		
1.5	16	11.5	APACC858026	4TBO858026C0100	20
1.5	35	15.5	APACC858028	4TBO858028C0100	10
16	70	20.5	APACC858032	4TBO858032C0100	10
16	120	23.5	APACC858033	4TBO858033C0100	10



Busbar system

Parallel configurations: busbars

ZX400

ZX406

ZX403

ZX365

ZX409

ZX362

ZX412

Article	Unit	Type code	Order code
Rated current (I_n) 250 A Copper rail 12 x 5 mm			
1 m	1	ZX400	2CPX061400R9999
2 m	1	ZX401	2CPX061401R9999
3 m	1	ZX402	2CPX061402R9999
4 m	1	ZX350	2CPX061350R9999
Rated current (I_n) 320 A Copper rail 20 x 5 mm			
1 m	1	ZX406	2CPX061406R9999
2 m	1	ZX407	2CPX061407R9999
3 m	1	ZX408	2CPX061408R9999
4 m	1	ZX351	2CPX061351R9999
Rated current (I_n) 360 A Copper rail 12 x 10 mm			
1 m	1	ZX403	2CPX061403R9999
2 m	1	ZX404	2CPX061404R9999
3 m	1	ZX405	2CPX061405R9999
4 m	1	ZX354	2CPX061354R9999
Rated current (I_n) 390 A Copper rails 25 x 5 mm			
1 m	1	ZX365	2CPX061365R9999
2 m	1	ZX366	2CPX061366R9999
3 m	1	ZX367	2CPX061367R9999
4 m	1	ZX352	2CPX061352R9999
Rated current (I_n) 440 A Copper rails 30 x 5 mm			
1 m	1	ZX409	2CPX061409R9999
2 m	1	ZX410	2CPX061410R9999
3 m	1	ZX411	2CPX061411R9999
4 m	1	ZX353	2CPX061353R9999
Rated current (I_n) 500 A Copper rails 20 x 10 mm			
1 m	1	ZX362	2CPX061362R9999
2 m	1	ZX363	2CPX061363R9999
3 m	1	ZX364	2CPX061364R9999
4 m	1	ZX355	2CPX061355R9999
Rated current (I_n) 630 A Copper rails 30 x 10 mm			
1 m	1	ZX412	2CPX061412R9999
2 m	1	ZX413	2CPX061413R9999
3 m	1	ZX414	2CPX061414R9999
4 m	1	ZX356	2CPX061356R9999

Busbar system

Parallel configurations: busbar connectors and cable sets

4TBV854310C0100

Copper connection kits for parallel busbar configurations
Includes copper connector and fastening materials

Description	Rated nominal current In (A)	Type code	Order code	Pack, pcs.
Parrallel busbar connection kit 250A	250	VA-BC-P-250	4TBV854308C0100	1
Parrallel busbar connection kit 400A	400	VA-BC-P-400	4TBV854309C0100	1
Parrallel busbar connection kit 630A\850A	630\850	VA-BC-P-630	4TBV854310C0100	1
Parrallel busbar connection kit 1250A	1250	VA-BC-P-1250	4TBV854311C0100	1

4TBV854292C0100

Cable sets

- For connecting devices and terminals to busbar systems
- With cable lug on one end only so length of cable could be adjusted
- 5 cables in one connection kit
- Double insulation

Description	Rated nominal current In (A) max	Type code	Order code	Cables in Pack, pcs.
Cable set 16mm² (5 pcs.)	60	VW-16	4TBV854290C0100	5
Cable set 25mm² (5 pcs.)	100	VW-25	4TBV854291C0100	5
Cable set 35mm² (5 pcs.)	130	VW-35	4TBV854292C0100	5

Notes

Busbar system

Flat configurations: busbar supports

	Description	N/PE load*, %	Rated I_n max.*	Type code	Order code	Pack, pcs.
4TBV854315C0100	**Busbar support for parallel/flat configurations** In: 160 A - 250 A Fastening elements are included in delivery kit. Busbar support is universal and can be used for both types of configurations.	100%	250 A	VXXSWNG5	4TBV854315C0100	10
4TBV828322C0100	**Busbar support for flat configurations** In: 250 A - 630 A Fastening elements are included in delivery kit.	83%	630 A	VXXSW65	4TBV828322C0100	10
	Busbar copper length formula for 630A 4TBV828322C0100 (see page 82 for illustration): Length of the busbar copper L1-L3= Total width of all bases (busbar compartment) - 5 mm. Length of the busbar copper PE/N= Total width of all bases (busbar compartment) - 40 mm.					
4TBV853075C0100	**Busbar support for parallel/flat configurations** In: 160 A - 250 A Fastening elements are included in delivery kit. Busbar support is universal and can be used for both types of configurations.	50%	250 A	VXXSWNE5	4TBV853075C0100	10
4TBV853076C0100	**Busbar support for parallel/flat configurations** In: 160 A - 250 A Fastening elements are included in delivery kit. Busbar support is universal and can be used for both types of configurations.	50%	250 A	VXXSWNF5	4TBV853076C0100	10

* Specified characteristics are valid for flat configurations only. Detailed information about applicable busbar crosssections, rated current, max. distance, Icw, etc. is located on next pages

Busbar system

Flat configurations: busbar supports

Order code	4TBV854315C0100		4TBV853075C0100 4TBV853076C0100	4TBV853075C0100 4TBV853076C0100
Rated nominal current In (A)	**160**	**250**	**160**	**250**
Center distance between phase busbars (mm)	40	40	40	40
Center distance between N/PE and phase busbar (mm)	50	50	50	50
Busbars				
Qty x cross section of phase busbar	1 x (12 x 5)	1 x (12 x 10)	1 x (12 x 5)	1 x (12 x 10)
Qty x cross section of N/PE busbar	1 x (12 x 5)	1 x (12 x 10)	1 x (12 x 5)	1 x (12 x 5)
N/PE load capacity	100%	100%	100%	50%
Dynamic short-circuit resistance				
Max. distance between busbar supports (mm)	320	320	320	320
Icw phase busbar (kA), 1 sec	20	21	20	20
Ipk phase busbar (kA), 1 sec	40	44,7	40	40

		4TBV828322C0100		
250	**300**	**400**	**450**	**630**
60	60	60	60	60
50/51	37/56	37/56	37/56	39,5/58,5
1 x (12 x 5)	1 x (20 x 5)	1 x (30 x 5)	1 x (20 x 10)	1 x (30 x 10)
1 x (12 x 5)	1 x (20 x 5)	1 x (25 x 5)	1 x (20 x 10)	1 x (25 x 10)
100%	100%	83%	100%	83%
250	250	250	250	250
11	15	22,5	22,5	30
18,7	30	48	48	63

Busbar system

Flat configurations: preassembled boxes with supports

4TBV853423C0100

For busbars 250/400A (100% PE/N) and 630A (50% PE/N) with 60mm center distance

- Base with four open sides without end plates
- Transparent cover
- With busbar holders 4TBV828322C0100 for 3f + N + PE
- Busbar center distance 60 mm
- For 5-pole, horizontally arranged busbars (flat orientation)
- For 12 x 5 mm, 30 x 5 mm and 30 x 10 mm busbars
- Busbars are not included (select from table below)

Description	External dimensions (HxWxD, mm)	Busbar cross-section, mm x mm	Max nominal current, A	Icw, kA	Type code	Order code	Pack, pcs.
VMS 32V with 60mm busbar support 250A/400A/630A 5 pole	320 x 220 x 179	20 x 5 30 x 5 30 x 10 + 25 x 10 (N/PE)	630		VB32VT-BF630	4TBV853419C0100	1
VMS 33 with 60mm busbar 250A/400A/630A 5 pole	320 x 320 x 179	20 x 5 30 x 5 30 x 10 + 25 x 10 (N/PE)	630		VB33HT-BF630	4TBV853420C0100	1
VMS 43H with 60mm busbar support 250A/400A/630A 5 pole	320 x 440 x 179	20 x 5 30 x 5 30 x 10 + 25 x 10 (N/PE)	630		VB43HT-BF630	4TBV853423C0100	1
VMS 63H with 60mm busbar support 250A/400A/630A 5 pole	320 x 640 x 179	20 x 5 30 x 5 30 x 10 + 25 x 10 (N/PE)	630		VB63HT-BF630	4TBV853424C0100	1

Busbar copper length formula for 630A 4TBV828322C0100 (see page 82 for illustration):
Length of the busbar copper L1-L3= Total width of all bases (busbar compartment) - 5 mm.
Length of the busbar copper PE/N= Total width of all bases (busbar compartment) - 40 mm.

Busbar system

Flat configurations: busbars

4TBV853797C0100

4TBV853798C0100

Busbar kits

- 5 flat copper busbars in one kit

Description	Busbar cross-section, mm x mm	Max nominal current, A	Compatible enclosure code	Type code	Order code	Kits in Pack, pcs.	Busbars in Pack, pcs.
Busbar kit 250A, Length = 215 mm, 60 mm busbar center distance, flat orientation, 5 pcs.	20 x 5	250	4TBV853419C0100	VC32VT-BF250	4TBV853781C0100	1	5
Busbar kit 400A, Length = 215 mm, 60 mm busbar center distance, flat orientation, 5 pcs.	20 x 10	400	4TBV853419C0100	VC32VT-BF400	4TBV853782C0100	1	5
Busbar kit 630A, Length = 215 mm, 60 mm busbar center distance, flat orientation, 5 pcs.	30 x 10 (L1-L3) 25 x 10 (N/PE)	630	4TBV853419C0100	VC32VT-BF630	4TBV853783C0100	1	5
Busbar kit 250A, Length = 315 mm, 60 mm busbar center distance, flat orientation 5 pcs.	20 x 5	250	4TBV853420C0100	VC33VT-BF250	4TBV853784C0100	1	5
Busbar kit 400A, Length = 315 mm, 60 mm busbar center distance, flat orientation, 5 pcs.	20 x 10	400	4TBV853420C0100	VC33VT-BF400	4TBV853797C0100	1	5
Busbar kit 630A, Length = 315 mm, 60 mm busbar center distance, flat orientation, 5 pcs.	30 x 10 (L1-L3) 25 x 10 (N/PE)	630	4TBV853420C0100	VC33VT-BF630	4TBV853798C0100	1	5
Busbar kit 250A, Length = 435 mm, 60 mm busbar center distance, flat orientation, 5 pcs	20 x 5	250	4TBV853423C0100	VC43HT-BF250	4TBV853799C0100	1	5
Busbar kit 400A, Length = 435 mm, 60 mm busbar center distance, flat orientation, 5 pcs	20 x 10	400	4TBV853423C0100	VC43HT-BF400	4TBV853800C0100	1	5
Busbar kit 630A, Length = 435 mm, 60 mm busbar center distance, f lat orientation, 5 pcs	30 x 10 (L1-L3) 25 x 10 (N/PE)	630	4TBV853423C0100	VC43HT-BF630	4TBV853801C0100	1	5
Busbar kit 250A, Length = 635 mm, 60 mm busbar center distance, flat orientation, 5 pcs	20 x 5	250	4TBV853424C0100	VC63HT-BF250	4TBV853802C0100	1	5
Busbar kit 400A, Length = 635 mm, 60 mm busbar center distance, flat orientation 5 pcs	20 x 10	400	4TBV853424C0100	VC63HT-BF400	4TBV853803C0100	1	5
Busbar kit 630A, Length = 635 mm, 60 mm busbar center distance, flat orientation, 5 pcs	30 x 10 (L1-L3) 25 x 10 (N/PE)	630	4TBV853424C0100	VC63HT-BF630	4TBV853804C0100	1	5

4TBV783267C0100

Busbar connector in flat configuration

To be used for connecting two busbars between adjacent enclosures

Max device current, A	Type code	Order code	Pack, pcs.
630 A	VXXRWNG1	4TBV783267C0100	1

Busbar system

Flat configurations: connection to busbars

ZK79

ZK81

ZK150

ZK178

ZK87

ZK157

ZK154

ZK156

Article	Copper rails Dimensions in mm	Connection cross-section in mm²	Unit	Type code	Order code
Connecting terminals for latching onto copper rails With retaining spring	5	1.5 - 16	1	ZK79	2CPX064879R9999
			4	ZK79P4	2CPX062421R9999
			5	ZK79P5	2CPX062631R9999
			50	ZK79P50	2CPX062429R9999
	5	4 - 35	1	ZK81	2CPX064881R9999
			4	ZK81P4	2CPX062422R9999
			5	ZK81P5	2CPX062632R9999
			50	ZK81P50	2CPX062431R9999
	5	2.5 - 50	1	ZK150	2CPX064860R9999
			4	ZK150P4	2CPX062427R9999
			5	ZK150P5	2CPX062633R9999
			50	ZK150P50	2CPX062432R9999
	5	16 - 70	1	ZK178	2CPX064978R9999
			50	ZK178P50	2CPX062622R9999
	5	16 - 120	1	ZK157	2CPX064867R9999
			50	ZK157P50	2CPX062437R9999
	10	1.5 - 16	1	ZK87	2CPX064887R9999
			4	ZK87P4	2CPX062424R9999
			50	ZK87P50	2CPX062430R9999
	10	16 - 70	1	ZK156	2CPX064866R9999
			50	ZK156P50	2CPX062438R9999
	10	16 - 120	1	ZK154	2CPX064864R9999
			50	ZK154P50	2CPX062435R9999

Alternative delivery format

Busbar thickness mm	Cable section (mm2)		Clamp width X (mm)	Type code	Order code	Pack, pcs.
	Min.	Max.				
5	1.5	16	11.5	APACC858026	4TBO858026C0100	20
5	4	35	15.5	APACC858028	4TBO858028C0100	10
5	16	70	20.5	APACC858032	4TBO858032C0100	10
5	16	120	20.5	APACC858033	4TBO858033C0100	10
10	1.5	16	11.5	APACC858027	4TBO858027C0100	10
10	1.5	35	15.5	APACC858029	4TBO858029C0100	10
10	16	70	20.5	APACC858030	4TBO858030C0100	10
10	16	120	30.5	APACC858031	4TBO858031C0100	10

Notes

Mounting frames

Wall-mounting frame

- Fixing small panels onto the wall can done with stainless steel mounting brackets: 4TBV853064C0100 refer to chapter "VMS individual components"
- To transport and fix panels with more than five enclosures, the use of a frame is essential.
- The frame includes at least 2 horizontal C-profiles (of an equal length to the width of the unit) and vertical C-profiles (equal to the number of rows +1).
- If the panel exceeds a height of 1000mm, three horizontal C-profiles are required.
- The vertical C-profiles are 140mm longer than the height of the assembled panel.
- The frame and the panel are assembled simultaneously.

Please refer to System Manual (p. 23) for detailed explanation of assembly steps:

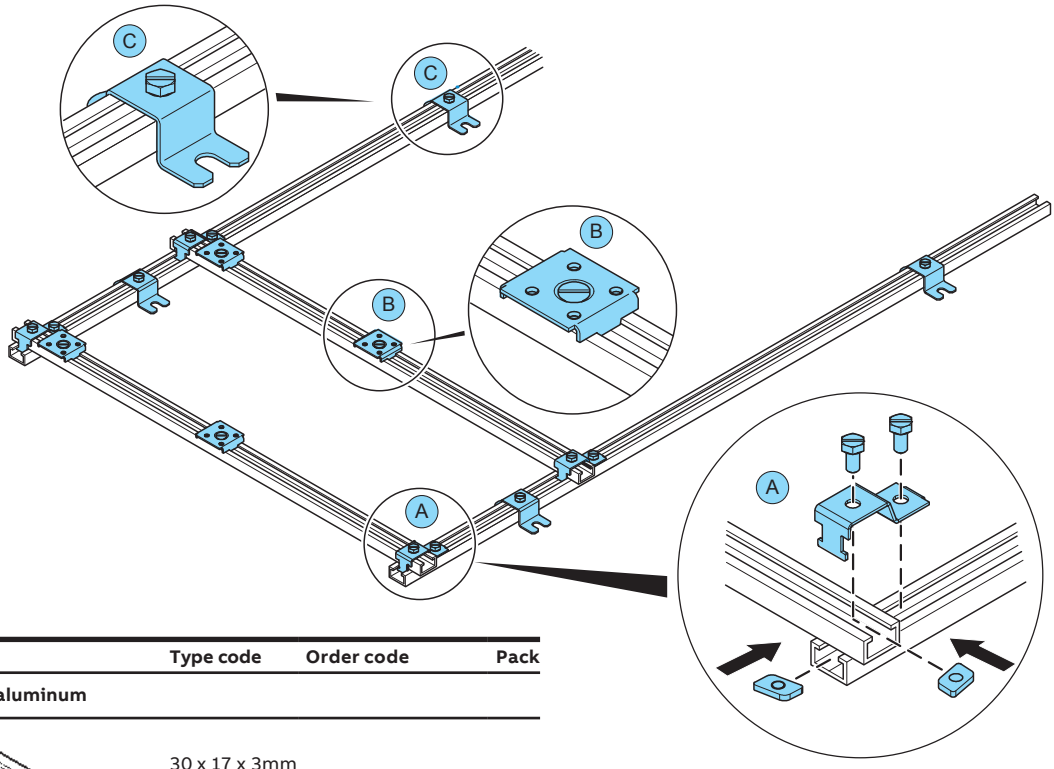

Product	Type code	Order code	Pack
C-Profile in aluminum			
 30 x 17 x 3mm Length = 3 m			
	APACC851254	4TBO851254C0100	5

Product	Type code	Order code	Pack
Clamping bracket with sliding nuts (A)			
With bolts and two sliding nuts M8. To mount the upper and lower C-profiles to the vertical support-profiles			
	APACC851253	4TBO851253C0100	10

Product	Type code	Order code	Pack
Box fixation plate (B)			
Delivered with bolt and sliding nut. To fix the enclosures onto the vertical support profiles.			
	APACC851415	4TBO851415C0100	10

Product	Type code	Order code	Pack
Screw M6 x 12 DIN 84			
For connection VMS box to fixation plate (B)			
	VRS612	4TBV853256C0100	50

Product	Type code	Order code	Pack
Clamping bracket with sliding nut (C)			
To fix the frame to a wall.			
	APACC851249	4TBO851249C0100	10

Mounting frames

Floor-standing frame

Please refer to System Manual (p. 25) for detailed explanation of assembly steps and limitations of the frame.

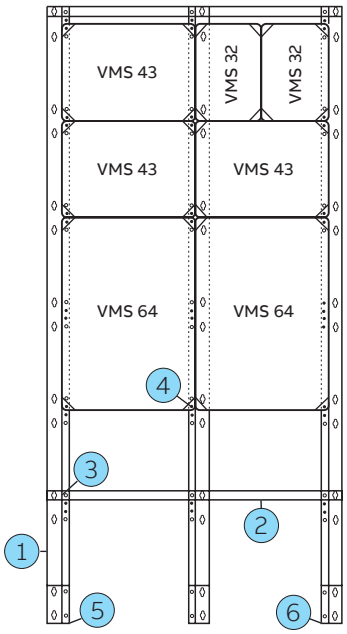

Position of the vertical profile in case of transport separation and / or expansion



Accessories

		Type code	Order code	Pack
 **Z-Profile**	**1 Vertical Z-profile - RAL 9001**			
	Aluzinc - L = 2 360 mm, for 6 × 320	VXXFWNJ7	4TBV855515C0100	
	Aluzinc - L = 2 040 mm, for 5 × 320	VXXFWNJ8	4TBV855516C0100	
	Aluzinc - L = 1 080 mm, for 3 × 320	VXXFWNJ9	4TBV855517C0100	
	Aluzinc - L = 760 mm, for 2 × 320	VXXFWNJ0	4TBV855518C0100	1
 **C-Profile**	**2 Horizontal - C-profile (steel)**			
	Length = 3 000 mm	ACC811619	4TBC811619C0100	1
4TBV855519C0100	**3 Fixation bracket**			
	Fixation bracket to connect the vertical and horizontal profiles	VXXFWNJA	4TBV855519C0100	1
M5×16 DIN 7500-C-TORX	**4 Screw**			
	M5×16 DIN 7500-C - TORX	VXXFWNJB	4TBV855520C0100	50
 **Stand support**	**Stand support**			
	5 Left	VXXFWNJC	4TBV855521C0100	
	6 Right	VXXFWNJD	4TBV855522C0100	1

VMS

VMS individual components

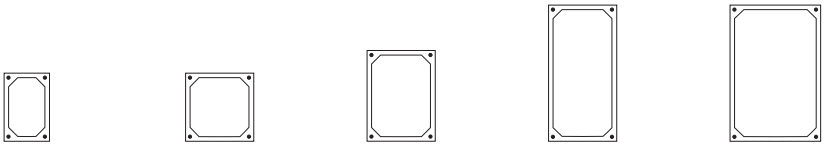

		Type code	VMS 32	VMS 33	VMS 43	VMS 63	VMS 64
4TBV853002C0100	**Base** With four open sides	H×W×D	320×220×130	320×320×130	440×320×130	640×320×130	640×440×130
		Type code	V32BWNJ6	V33BWNJ6	V43BWNJ6	V63BWNJ6	V64BWNJ6
		Order code	4TBV853000C0100	4TBV853001C0100	4TBV853002C0100	4TBV853003C0100	4TBV853004C0100
		Pack	4	2	2	1	1
4TBV854178C0100	Cover transparent With slotted screws	H×W×D	320×220×50	320×320×50	440×320×50	640×320×50	640×440×50
		Type code	V32CTNJ6_R	V33CTNJ6_R	V43CTNJ6_R	V63CTNJ6_R	V64CTNJ6_R
		Order code	4TBV854173C0100	4TBV854174C0100	4TBV854178C0100	4TBV854179C0100	4TBV854183C0100
		Pack	4	2	2	1	1
4TBV854194C0100	Cover solid With slotted screws	H×W×D	320×220×50	320×320×50	440×320×50	640×320×50	640×440×50
		Type code	V32CBNJ6_R	V33CBNJ6_R	V43CBNJ6_R	V63CBNJ6_R	V64CBNJ6_R
		Order code	4TBV854184C0100	4TBV854193C0100	4TBV854194C0100	4TBV854198C0100	4TBV854199C0100
		Pack	4	2	2	1	1
4TBV854201C0100	Cover Hinged With double closure system Opening at 215°	H×W×D	-	320×320×50	440×320×50	-	-
		Type code	-	V33CPNJ6_R	V43CPNJ6_R	-	-
		Order code		4TBV854200C0100	4TBV854201C0100		
		Pack	-	2	2	-	-
4TBV853032C0100	Depth extension frame With fixing screws	H×W×D	320×220×75	320×320×75	440×320×75	640×320×75	640×440×75
		Type code	V32WDNJ6	V33WDNJ6	V43WDNJ6	V63WDNJ6	V64WDNJ6
		Order code	4TBV853030C0100	4TBV853031C0100	4TBV853032C0100	4TBV853033C0100	4TBV853034C0100
		Pack	4	2	2	1	1
4TBV853115C0100	Metal mounting plate, 2mm With mounting set	H×W×D	260×160	260×260	380×260	580×260	580×380
		Type code	V32MWNJ6	V33MWNJ6	V43MWNJ6	V63MWNJ6	V64MWNJ6
		Order code	4TBV853068C0100	4TBV853069C0100	4TBV853070C0100	4TBV853071C0100	4TBV853072C0100
	Pertinax, 5mm With mounting set	H×W×D	260×160	260×260	380×260	580×260	580×380
		Type code	V32IWNJ6	V33IWNJ6	V43IWNJ6	V63IWNJ6	V64IWNJ6
		Order code	4TBV853113C0100	4TBV853114C0100	4TBV853115C0100	4TBV853116C0100	4TBV853117C0100
		Pack	1	1	1	1	1
4TBV853105C0100	Solid cover plate Grey (RAL7035) Insulated material, 2mm With mounting set	H×W×D	301×201	301×301	421×301	621×301	621×421
		Type code	V32PWNJ7	V33PWNJ7	V43PWNJ7	V63PWNJ7	V64PWNJ7
		Order code	4TBV853103C0100	4TBV853104C0100	4TBV853105C0100	4TBV853106C0100	4TBV853107C0100
		Pack	1	1	1	1	1

VMS

VMS individual components

Closure plates

4TBV855034C0100

Metric sizes	Type code	Order code	Pack	Size
3 x M32 / M25 + 3 x M20	VX2EWNJ7	4TBV855029C0100	1/10	220
1 x M50 / M40 + 4 x M25 / M20	VX2EWNJ8	4TBV855030C0100	1/10	220
3 x M50 / M40 + 4 x M16	VX3EWNJ9	4TBV855032C0100	1/10	320
17 x M20	VX3EWNJ0	4TBV855033C0100	1/10	320
1 x M50 / M40 + 2 x M32 / M25 + 4 x M25 / M20	VX3EWNJA	4TBV855034C0100	1/10	320
12 x M25 / M20	VX3EWNJB	4TBV855035C0100	1/10	320
4 x M40 / M32 + 3 x M20	VX3EWNJC	4TBV855036C0100	1/10	320
1 x M40 / M32 + 16 x M25 / M20	VX4EWNJ8	4TBV855037C0100	1/10	440
1 x M50 / M40 + 2 x M40 / M32 + 8 x M25 / M20	VX4EWNJ9	4TBV855038C0100	1/10	440

Product	Type code	Order code	Pack
Closure plates			
4TBV853020C0100	Side (mm) 220		
	VX2EWNJ6	4TBV853017C0100	1/10
	Side (mm) 320		
	VX3EWNJ6	4TBV853020C0100	1/10
	Side (mm) 440		
	VX3EWNJ7	4TBV853027C0100	1/10
Plates with cable entries			
4TBV853082C0100	Ø cable max.: 2 x 75 mm		
	Side (mm) 320		
	VX3EWNJ6	4TBV853082C0100	1/5
	Ø cable max.: 3 x 75 mm		
	Side (mm) 440		
	VX4EWNJ6	4TBV853083C0100	1/5
Cable grip support			
With a cable clamp Ø max.: 75mm			
4TBV853036C0100	Side (mm) 320		
	VX3LWNJ6	4TBV853036C0100	1/5
4TBV853037C0100	Side (mm) 440		
	VX4LWNJ6	4TBV853037C0100	1/5
Stress-relieving cable clamp			
For fixing on the cable clamp support			
	Ø cable max.: 75mm		
	VXXLWNJ6	4TBV853035C0100	1
Bridges			
Facilitate the connection of large-section cables			
4TBV853073C0100	Side (mm) 320		
	VX3AWNJ6	4TBV853073C0100	1
	Side (mm) 440		
	VX4AWNJ6	4TBV853074C0100	1

Product	Type code	Order code	Pack
Coupling dowels			
4TBV853059C0100	For base coupling		
	VXXAWNJ8	4TBV853059C0100	20
Fixation pin			
4TBV853055C0100	For end-plates (as a spare part)		
	VXXEWNJ6	4TBV853055C0100	10
Coupling set 2 x 220			
4TBV853063C0100	To couple two sides of 220mm to one side of 440mm With mounting accessories		
	VXXAWNJA	4TBV853063C0100	1
Coupling clamp			
4TBV853062C0100	For coupling in special cases		
	VXXAWNJ9	4TBV853062C0100	10
Universal support			
4TBV853060C0100	To fit: - mounting plates and DIN-rails - copper rails 15 x 3 - copper rails 9 x 6.5 - mounting rail 12 x 2mm		
	VX3UWNJ6	4TBV853060C0100	10
Marking strip			
2CPX038241R9999	Self-adhesive		
	ZA10	2CPX038241R9999	1m

VMS

VMS individual components

Product	Type code	Order code	Pack
Symmetrical DIN-profiles			
Always supplied with two universal supports			
4TBV853095C0100	Side (mm) 220		
	VX2AWNJ6	4TBV853094C0100	1
	Side (mm) 320		
	VX3AWNJ6	4TBV853095C0100	1
	Side (mm) 440		
	VX4AWNJ6	4TBV853096C0100	1
	Side (mm) 640		
	VX6AWNJ6	4TBV853269C0100	1
Mounting rails 12 x 2mm			
To fit connection terminal blocks. Always delivered with 2 universal supports.			
4TBV853098C0100	Side (mm) 320		
	VX3AWNJ7	4TBV853098C0100	1
	Side (mm) 440		
	VX4AWNJ7	4TBV853099C0100	1
Partition plates			
For complete compartmentalization of coupled bases.			
4TBV853066C0100	Side (mm) 220		
	VX2TWNJ6	4TBV853065C0100	1
	Side (mm) 320		
	VX3TWNJ6	4TBV853066C0100	1
	Side (mm) 440		
	VX4TWNJ6	4TBV853067C0100	1
Fixing lugs			
Set of 4 brackets with screws. - In stainless steel. - For external fixing points. - Direct fitting through the four corner shafts of the base. - To be installed prior to the extension frame or hinge installation. - Three optional mounting positions (0°, 45°, 90°).			
 **4TBV853064C0100**	VXXAWNJB	4TBV853064C0100	1
Air vent - IP55			
Installation of two air vents per box to obtain ventilation preventing the f… densation. Set of 2 pieces.			
4TBJ818078R0100	ACC818078	4TBJ818078R0100	1
Blanking plate			
For 12 modules			
2CPX062384R9999	ZA1P5	2CPX062384R9999	5
	ZA1P50	2CPX062378R9999	50

Product	Type code	Order code	Pack
Cover screws			
4TBV854344C0100	Set of 4 pieces.		
	VXXCWNJ6_R	4TBV854344C0100	1
Hinge screws			
The base must bed before fixed prior to hinge installation. Set of 2 pieces.			
4TBV854345C0100	VXXHWNJ6_R	4TBV854345C0100	1
Hinges made of molded material			
To mount the hinges, the cover and the base must be pierced. Drilling templates are provided. The kit includes: two hinges, screws, reinforcement plates, drilling gage and instructions. Set of 2 pieces.			
4TBV853340C0100	VXXHWNJ7	4TBV853340C0100	1
Clip-in button			
For quick opening/closing of cover screws. Set of 4 pieces.			
4TBV854346C0100	VXXAWNJ7_R	4TBV854346C0100	1
Screws			
4TBV853100C0100	For fixation in the base.		
	5 x 13		
	VXXAWNJC	4TBV853100C0100	50
	5 x 16		
	VXXAWNJD	4TBV853101C0100	50
	5x22		
	VXXAWNJA	4TBV853102C0100	50
	To fix the equipment onto the metal mounting plates.		
Screws for depth extension frame			
4TBV853056C0100	Replacement parts		
	VXXDWNJ6	4TBV853056C0100	4
Fixation set for cover plate			
4TBV853053C0100	Replacement parts		
	VXXPWNJ7	4TBV853053C0100	1
Fixation set for mounting plate			
4TBV853054C0100	For metal or Pertinax Replacement parts		
	VXXIWNJ6	4TBV853054C0100	1

VMS
Drawings

VMS 32

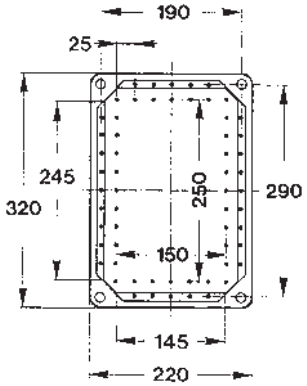

VMS 33

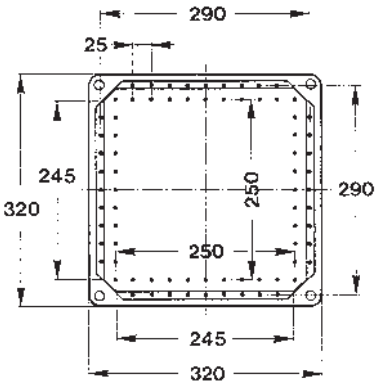

VMS 43

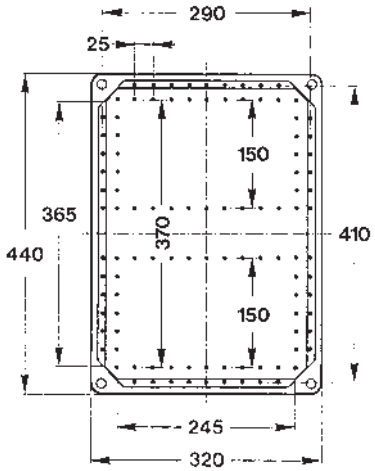

VMS 63

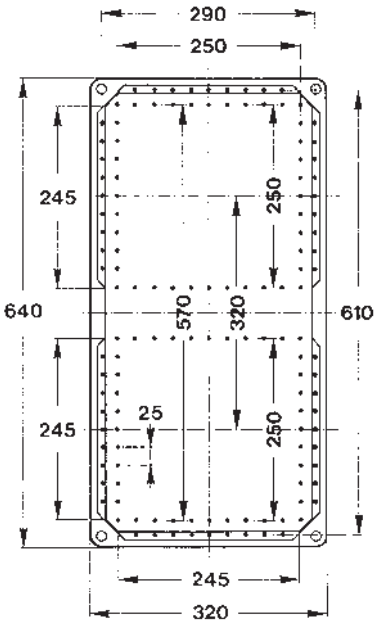

VMS 64

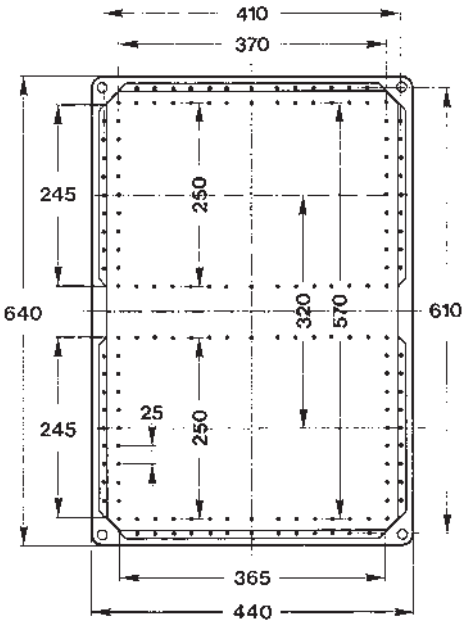

VMS
Drawings

Openings in the base side walls
Side 220



Side 320



Side 440

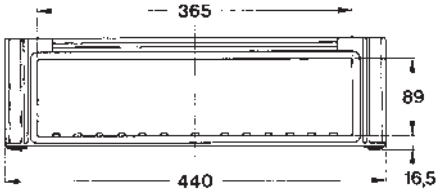

Side 640

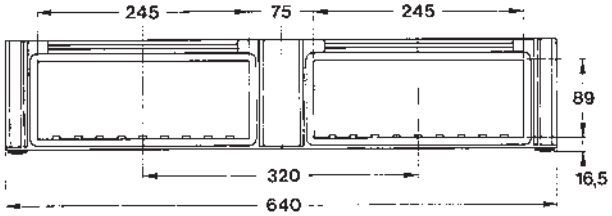

Built-in heights

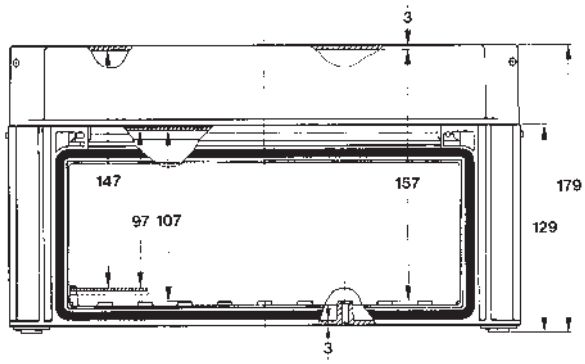

Pivoting covers

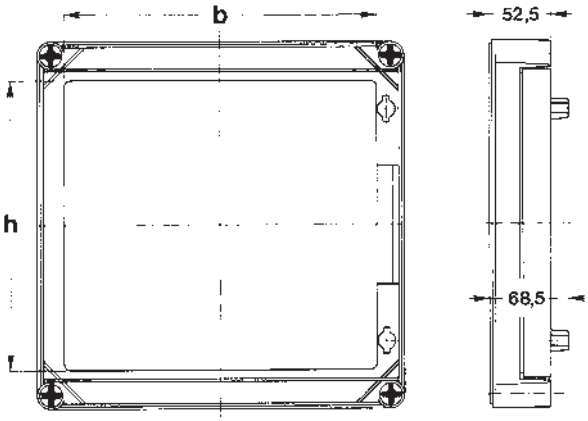

Type	Dimensions	b	h
VMS 33	320×320 mm	260	241
VMS 43	440×320 mm	260	361

VMS
Drawings

Cable end plates and universal cable stress releases
Side 320

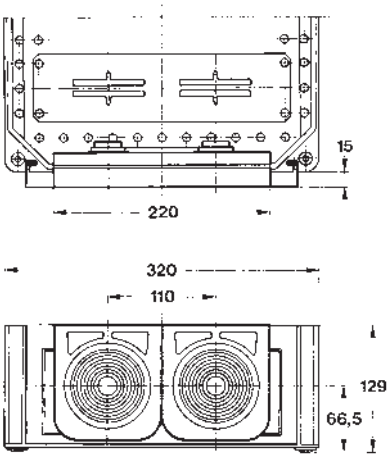

Side 440

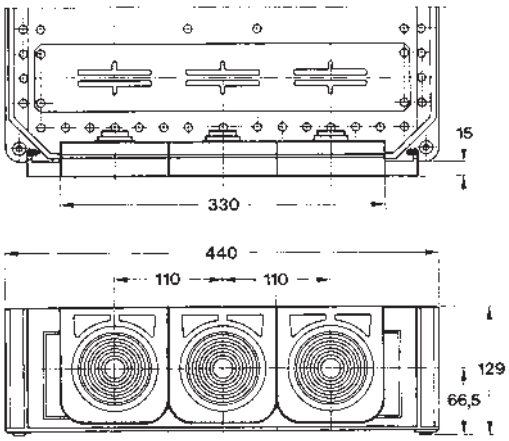

Side view



Mounting brackets

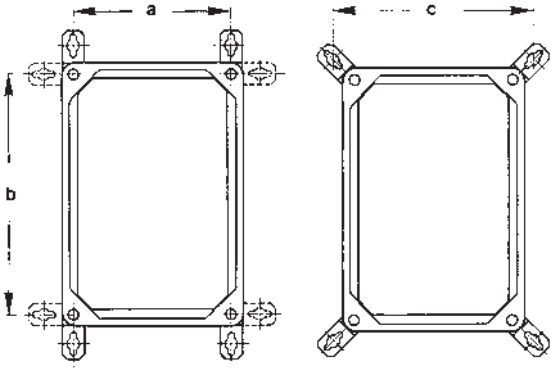

Type	Dimensions	a	b	c
VMS 32	320×220 mm	193	293	254
VMS 33	320×320 mm	293	293	354
VMS 43	440×320 mm	293	413	354
VMS 63	640×320 mm	293	613	354
VMS 64	640×440 mm	413	613	474

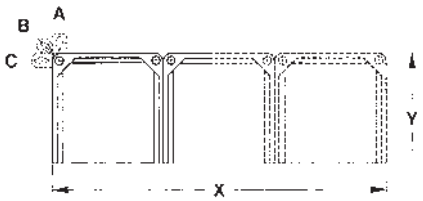

	Centre dimensions	
A	X - 27	Y + 40
B	X + 34	Y + 34
C	X + 40	Y - 27

VMS

Drawings: busbar supports

4TBV854315C0100

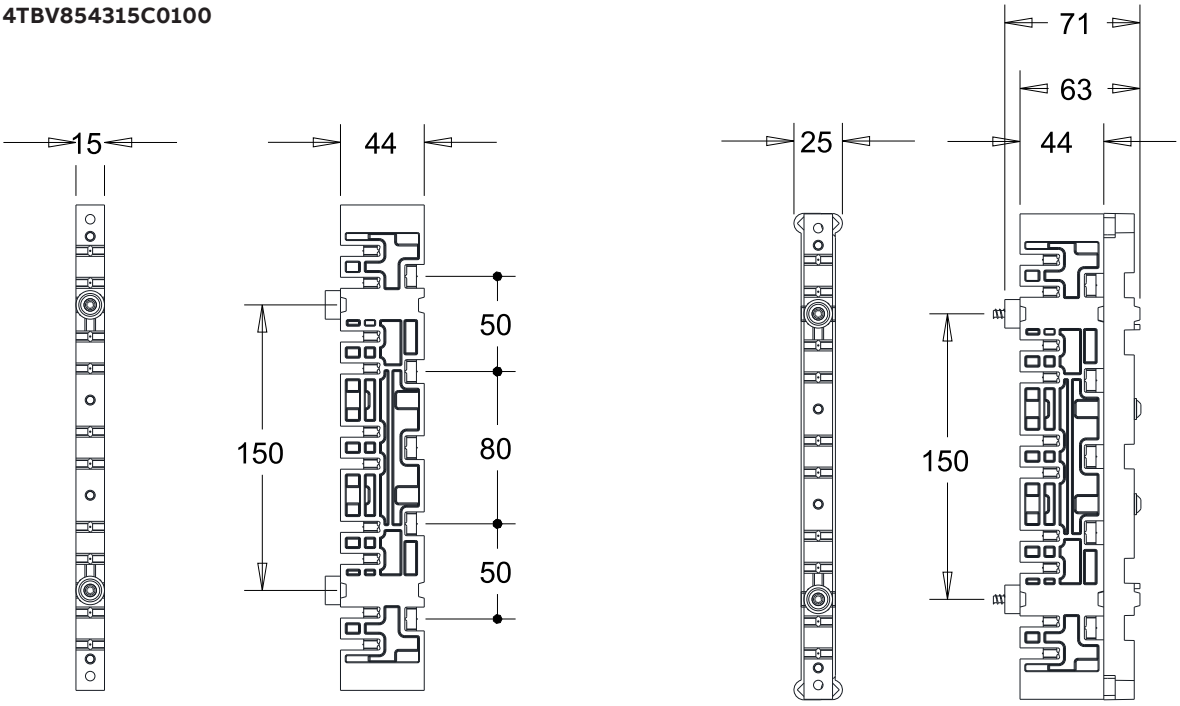

4TBV853075C0100

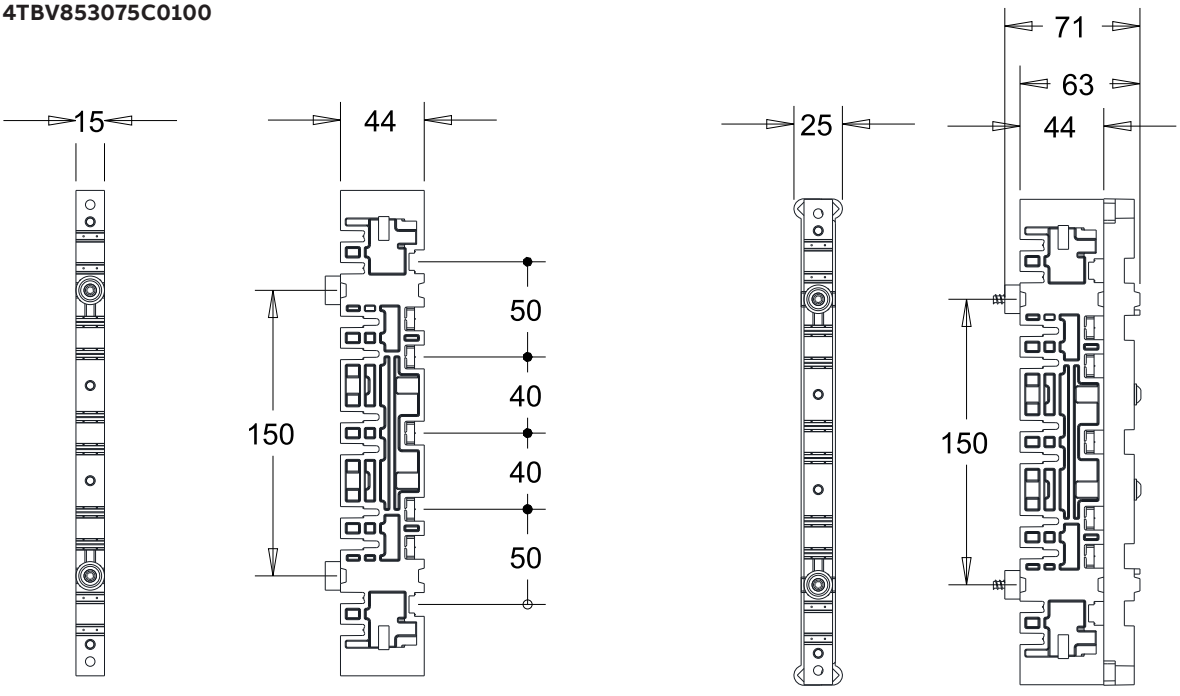

VMS

Drawings: busbar supports

4TBV853076C0100

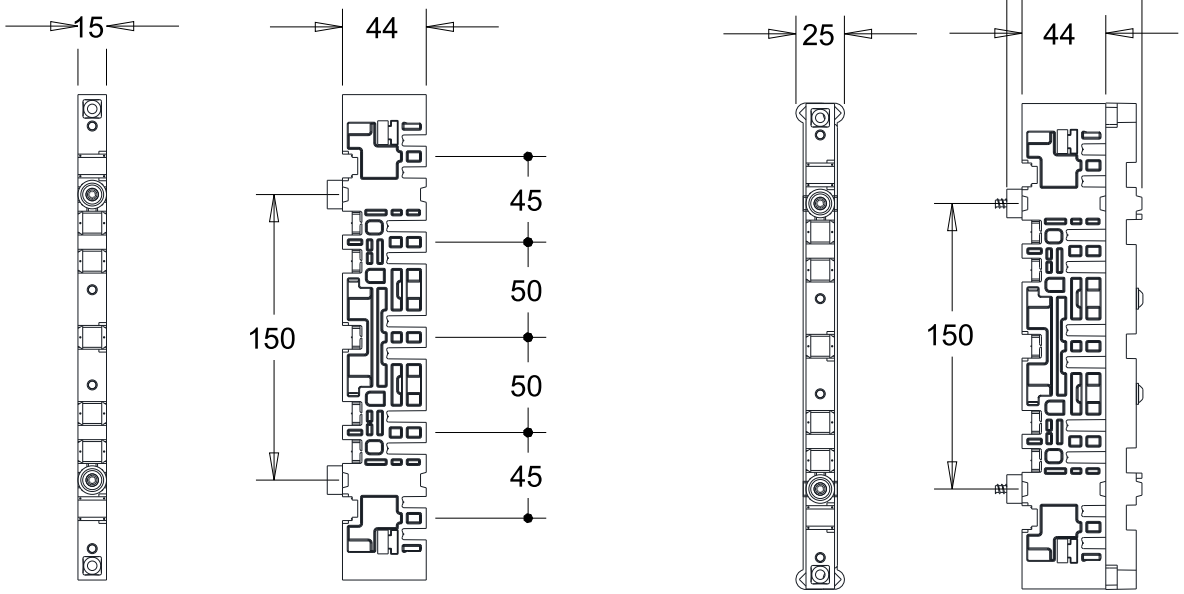

4TBV855077C0100

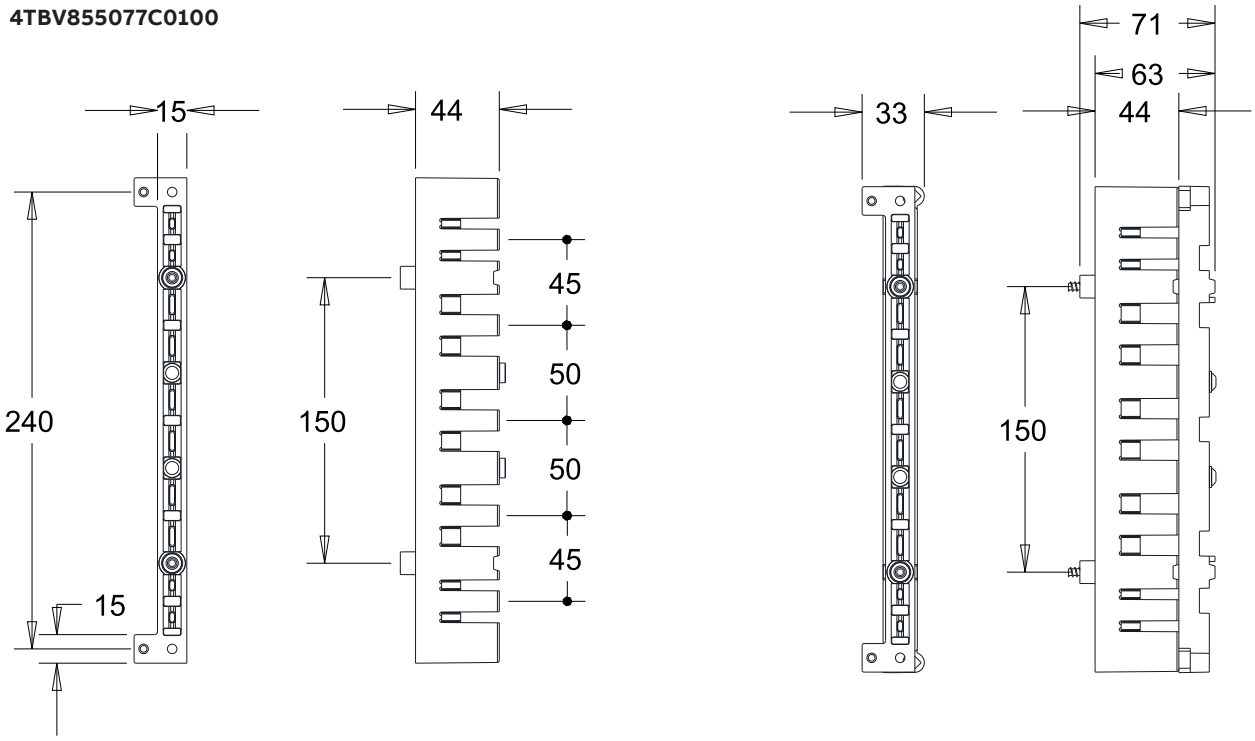

VMS

Drawings: busbar supports

4TBV855177C0100

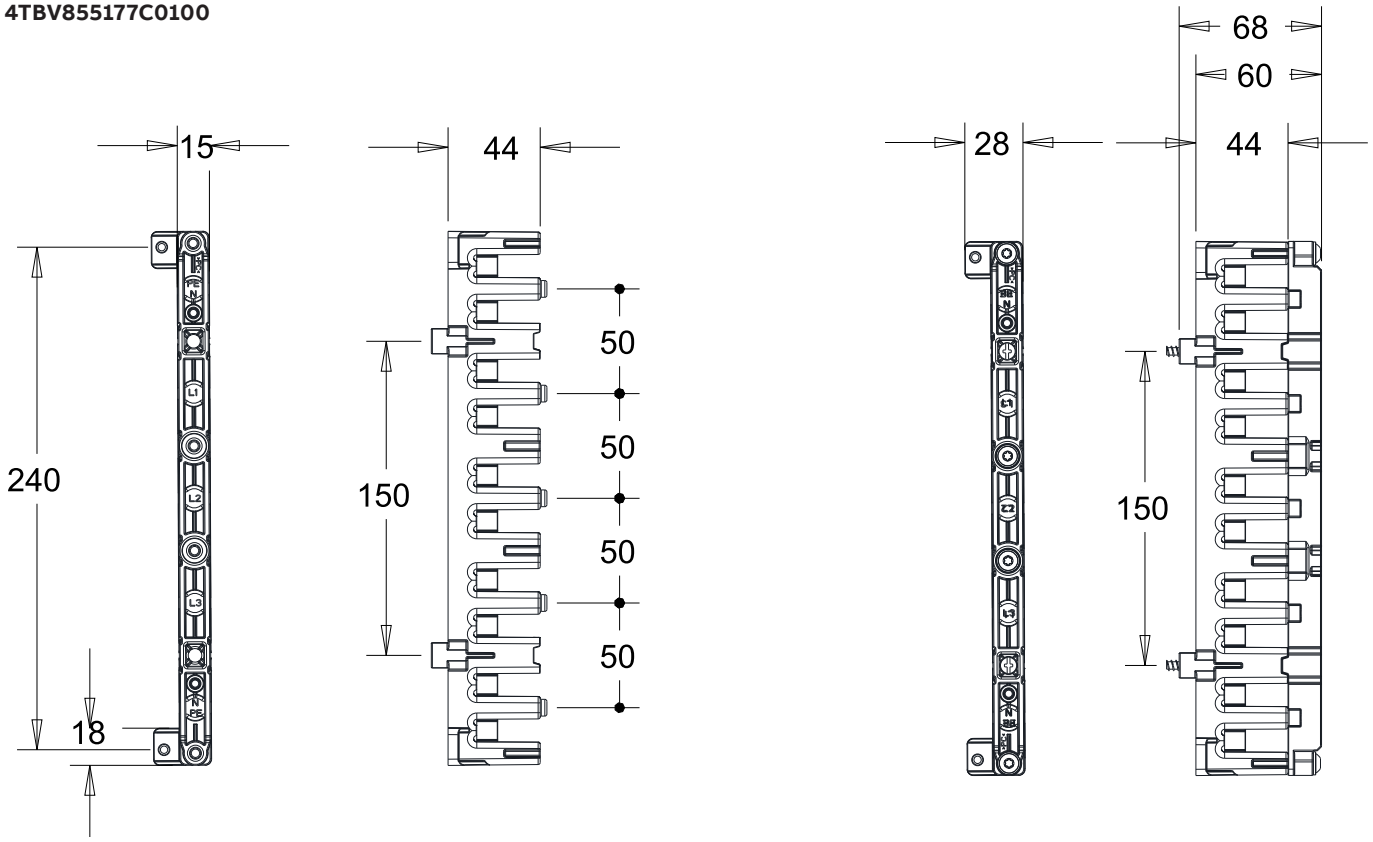

VMS

Drawings: busbar supports

4TBV828322C0100

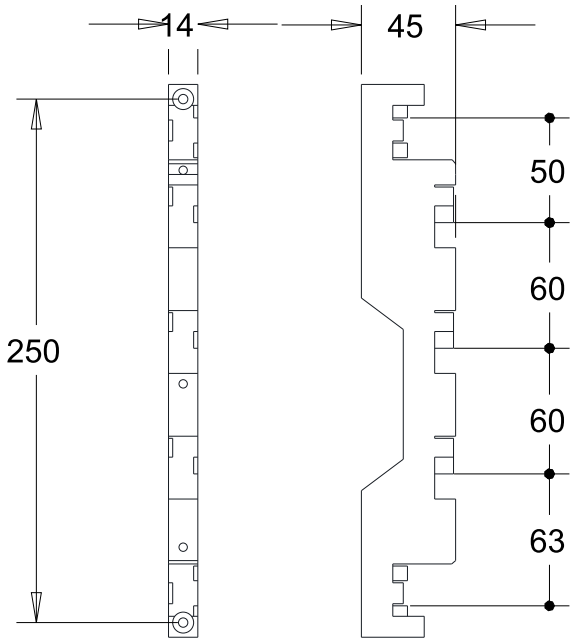

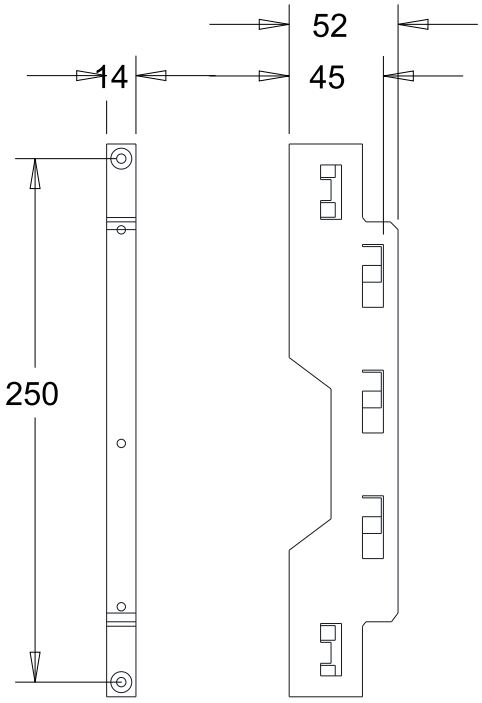

VMS

Power dissipation values

Rear against wall (wall mounting)

Temperature rise [Kelvin]

Dissipation	VMS 32 320×220×180		VMS 32 320×220×255		VMS 33 320×320×180		VMS 33 320×320×255		VMS 43 440×320×180		VMS 43 440×320×255		VMS 63 640×320×180		VMS 63 640×320×255		VMS 64 640×440×180		VMS 64 640×440×255	
Watt	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top
10	11	14	9	11	9	11	8	9	8	9	7	8	6	7	5	6	5	6	4	5
20	20	24	16	20	16	19	14	16	13	16	11	14	10	13	9	11	9	11	8	10
30	27	33	22	27	22	26	19	23	18	23	16	19	14	18	12	15	12	15	11	13
40	34	42	28	34	28	33	24	28	23	28	20	24	18	23	16	19	15	19	14	17
50	41	50	33	41	33	39	29	34	28	34	24	29	22	27	19	23	18	22	16	20
60	47		38	47	38	45	33	39	32	39	28	34	25	31	22	27	21	26	19	23
70	54		43	53	43	51	38	45	36	45	31	38	28	36	24	30	24	29	21	26
80			48		48		42	50	41	50	35	43	32	40	27	34	27	33	24	29
90			53		53		46	55	45	55	38	47	35	43	30	37	29	36	26	32
100							50		49		42	51	38	47	33	41	32	39	28	35
120									56		48		44	55	38	47	37	45	33	40
140											55		50		43	53	42	51	37	46
160													55		47		47		41	51
180															52		51		45	56
200															57		56		49	
220																			53	

Front, right and upperside free

Temperature rise [Kelvin]

Dissipation	VMS 32 320×220×180		VMS 32 320×220×255		VMS 33 320×320×180		VMS 33 320×320×255		VMS 43 440×320×180		VMS 43 440×320×255		VMS 63 640×320×180		VMS 63 640×320×255		VMS 64 640×440×180		VMS 64 640×440×255	
Watt	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top
10	12	15	10	12	9	11	8	10	8	10	7	9	6	8	6	7	5	6	5	6
20	21	26	17	21	16	20	15	17	14	17	12	15	11	14	10	12	9	11	8	10
30	29	35	24	30	23	27	20	24	20	24	17	21	15	19	13	17	13	16	11	14
40	36	45	30	37	29	34	25	30	25	30	21	26	19	24	17	21	16	20	14	18
50	43	53	36	45	34	41	30	36	29	36	26	31	23	29	20	25	19	24	17	21
60	50		42	52	40	47	35	42	34	42	30	36	27	34	23	29	22	27	20	24
70	57		48		45	54	40	47	39	47	34	41	31	38	26	33	25	31	22	28
80			53		50		44	53	43	53	37	46	34	42	29	37	28	35	25	31
90					55		49		47		41	50	37	47	32	40	31	38	27	34
100							53		51		45	55	41	51	35	44	34	41	30	37
120											52		47		41	51	39	48	35	43
140													53		46		44	54	39	48
160															51		49		44	54
180															57		54		48	
200																			52	
220																			56	

VMS

Power dissipation values

Frontside and upperside free

Temperature rise [Kelvin]

Dissipation	VMS 32 320×220×180		VMS 32 320×220×255		VMS 33 320×320×180		VMS 33 320×320×255		VMS 43 440×320×180		VMS 43 440×320×255		VMS 63 640×320×180		VMS 63 640×320×255		VMS 64 640×440×180		VMS 64 640×440×255	
Watt	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top
10	13	16	11	14	10	12	9	10	9	10	8	9	7	9	6	8	6	7	5	6
20	22	27	20	24	18	22	15	18	15	18	13	16	12	15	11	13	10	12	9	11
30	31	37	27	33	25	30	21	25	21	25	18	22	17	21	15	18	14	17	12	15
40	38	47	34	42	32	38	27	32	26	32	23	28	21	26	18	23	17	21	15	19
50	46	57	41	50	38	45	32	38	31	38	28	34	25	31	22	28	20	25	18	22
60	53		47		44	52	37	44	36	44	32	39	29	36	26	32	24	29	21	26
70			53		50		42	50	41	50	36	44	33	41	29	36	27	33	24	29
80					55		47	56	46	56	40	49	37	46	32	40	30	37	27	33
90							52		50		44	54	40	50	35	44	33	40	29	36
100							56		54		48		44	55	39	48	36	44	32	39
120											56		51		45	56	41	51	37	45
140															51		47		42	51
160															56		52		46	
180																			51	

Frontside free, upperside not free

Temperature rise [Kelvin]



Dissipation	VMS 32 320×220×180		VMS 32 320×220×255		VMS 33 320×320×180		VMS 33 320×320×255		VMS 43 440×320×180		VMS 43 440×320×255		VMS 63 640×320×180		VMS 63 640×320×255		VMS 64 640×440×180		VMS 64 640×440×255	
Watt	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top	Half	Top
10	14	17	12	15	12	14	10	12	9	11	8	10	7	9	7	8	6	7	5	7
20	24	30	22	27	20	24	18	22	16	20	15	18	13	16	12	14	11	13	10	12
30	33	41	30	37	28	34	25	30	22	27	20	25	18	22	16	20	15	18	13	16
40	42	52	38	46	36	42	32	38	28	34	26	31	22	28	20	25	18	23	17	21
50	50		45	55	43	51	38	45	34	41	31	38	27	33	24	30	22	27	20	25
60			52		49		44	52	39	48	35	43	31	39	28	35	26	31	23	28
70					56		50		44	54	40	49	35	44	32	39	29	36	26	32
80							55		49		45	55	39	49	35	44	32	40	29	36
90									54		49		43	54	39	48	35	43	32	39
100											54		47		42	52	39	47	35	43
120													54		49		45	55	40	50
140															55		50		46	56
160																	56		51	
180																			56	

Type codes
Boxes

V
H

32V

32H

33H


43V


43H


63V

63H


64V

64H

Boxes

Cabinettype			
VB	VMS Box		
VF	VMS Functional unit		

Dimension of box with cover (H x W x D)			
32	320 x 220 x 179	**63**	640 x 320 x 179
33	320 x 320 x 179	**64**	640 x 440 x 179
43	440 x 320 x 179		

Orientation			
H	Horizontal	**-**	Universal
V	Vertical		

Cover			
W	Without cover	**T**	Transparent cover
O	Opague cover	**P**	Pivoting cover

Function			
B	Busbar box	**N**	No function
BF	Busbar box flat copper	**P**	Mounting Plate
C	Change over box OT	**Q**	Metering
D	DIN-rail box 125 mm	**S**	Switch box OT
DX	DIN-rail box 150 mm	**SP**	SPD / S750 for 40 mm busbar
E	Empty box	**X**	Fuse switch XLP
F	Switch box OS	**XT**	MCCB box XT + size
H	Fuse holder box OFAZ	**XZ**	Fuse switch XLP for 60 mm busbar
HD	Fuse holder box D-type	**Z**	Fuse switch Inline II
K	kWh meter box		

Amp rating			
40	40A	**400**	400A / DIN2
63	63A	**630**	630A / DIN3
125	125A	**800**	800A
160	160A / DIN00	**1000**	1000A
250	250A / DIN1	**1250**	1250A

No of poles			
1	1 pole		
2	2 pole	**4**	4 pole
3	3 poles		

Position of MBB relative to box	
T	Above box
B	Below box

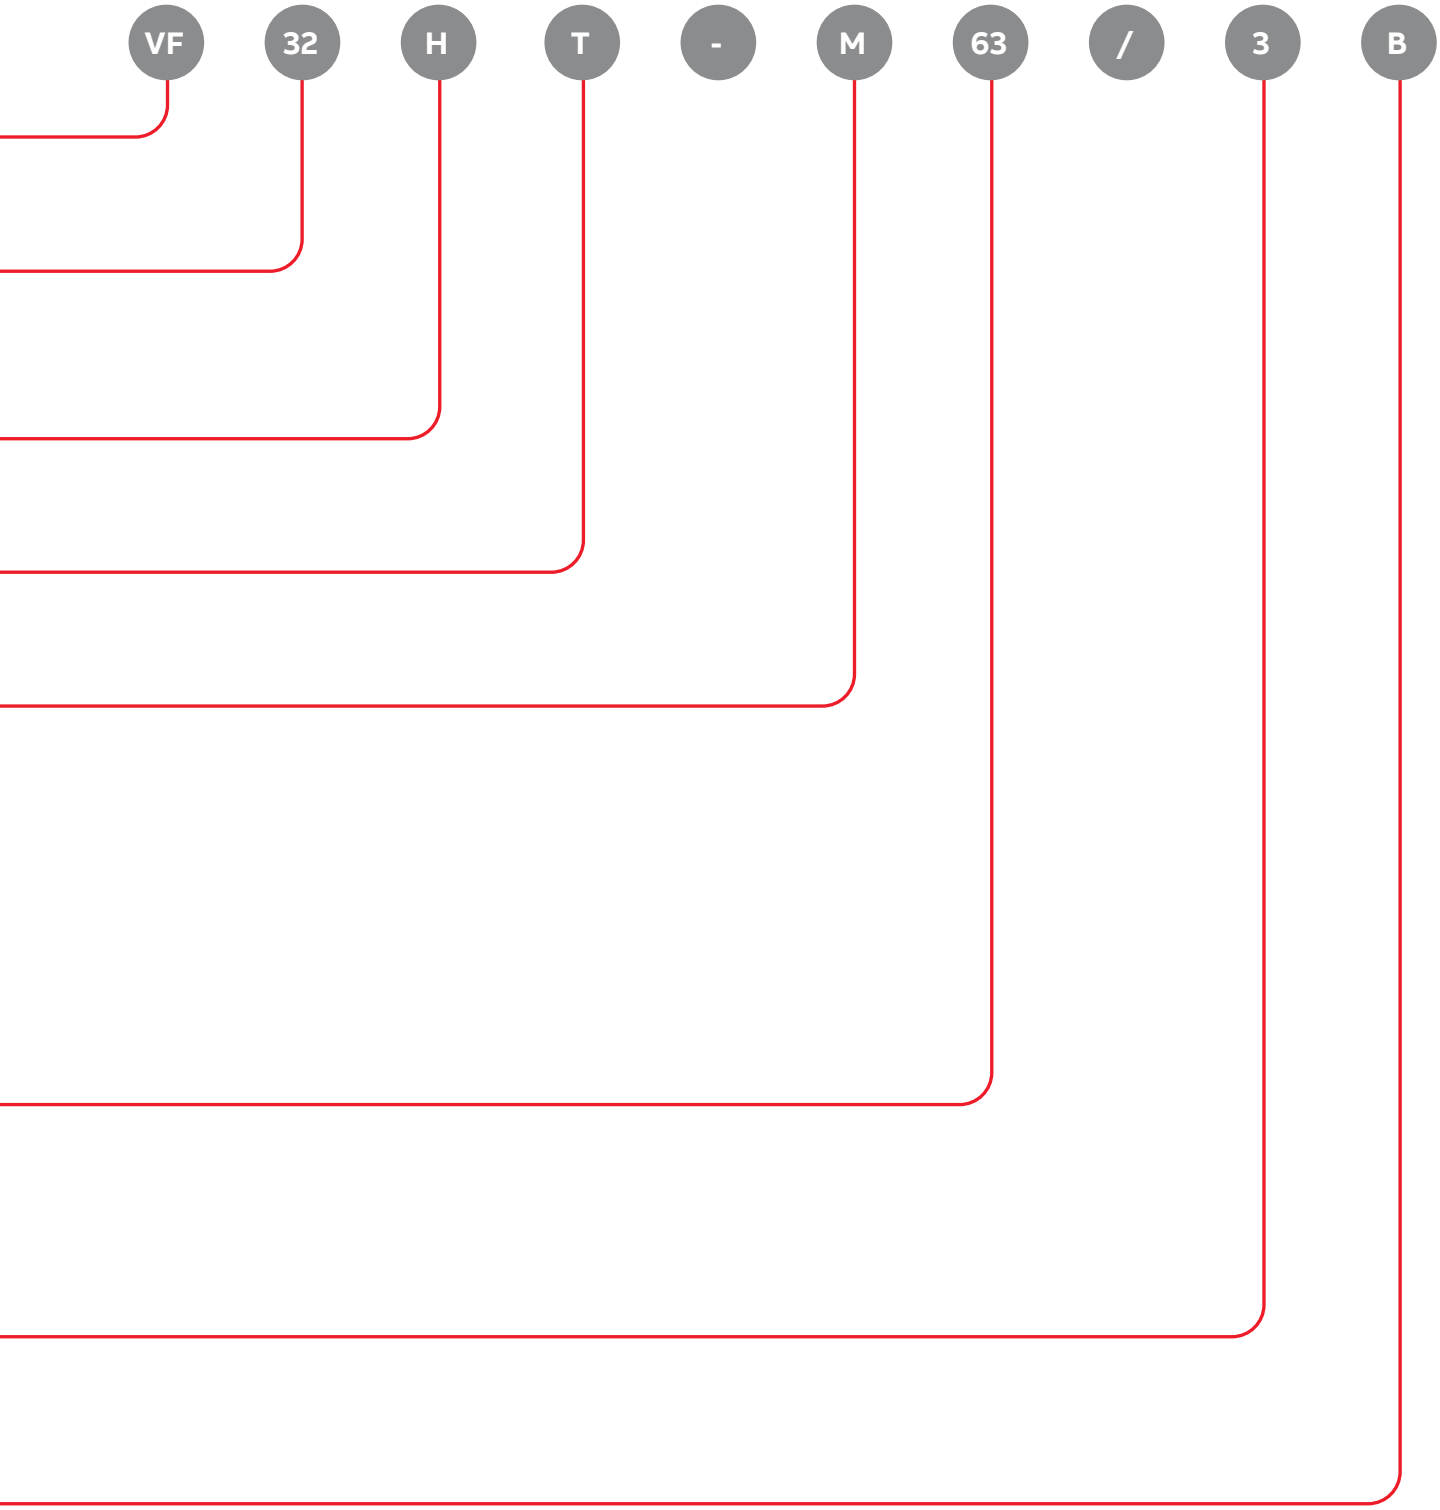
VF
32
H
T
-
M
63
/
3
B

Type codes
Connecting busbar kits

V
H

32V

32H

33H



43V



43H



63V

63H



64V



64H

Busbar Kits

Kit type	
VC	VMS busbar kit

Dimension of box with cover (H x W x D)			
32	320 x 220 x 179	**63**	640 x 320 x 179
33	320 x 320 x 179	**64**	640 x 440 x 179
43	440 x 320 x 179		

Orientation			
H	Horizontal	**-**	Universal
V	Vertical		

Function			
B	Busbar box	**S**	Switch box OT
BF	Busbar box flat copper	**X**	Fuse switch XLP
C	Change over box OT	**XT**	MCCB box XT + size
F	Switch box OS	**XZ**	Fuse switch XLP for 60 mm busbar
H	Fuse holder box OFAZ	**Z**	Fuse switch ZLB
HD	Fuse holder box D-type		

Amp rating			
40	40A	**400**	400A / DIN2
63	63A	**630**	630A / DIN3
125	125A	**800**	800A
160	160A / DIN00	**1000**	1000A
250	250A / DIN1	**1250**	1250A

Application	
P	Phase
S	Solid Neutral
N	Neutral
PE	Earth
PEN	Combined neutral and earth

Position of MBB relative to enclosure when kit is used for PE or PEN connection			
T	Above box	**-**	Universal
B	Below box		

N/PE/PEN load capacity	
0.5	50%
-	100%

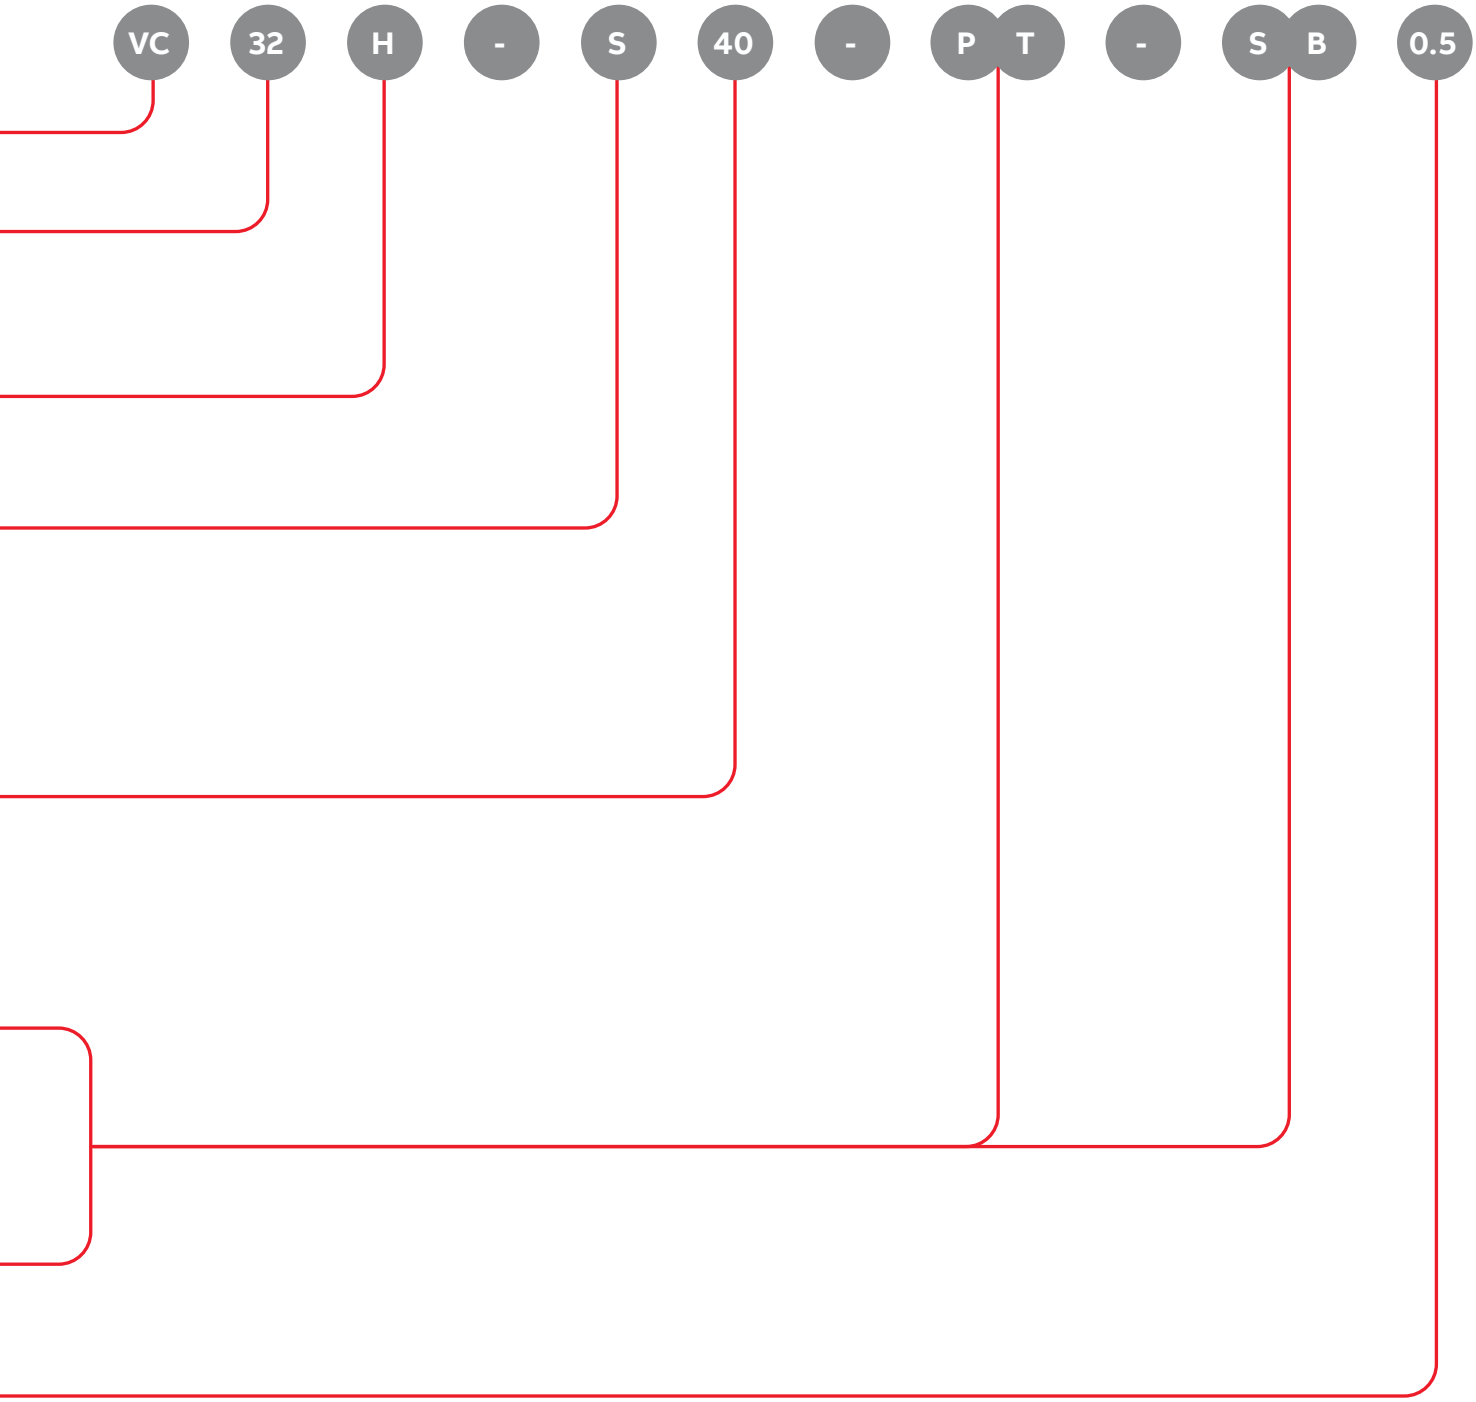
VC
32
H
-
S
40
-
P
T
-
S
B
0.5

Type codes

Busbar/cable Kits between OT and FH or between PE and N



32V

32H

33H



43V



43H



63V

63H



64V



64H

Busbar/cable Kits between OT and FH or between PE and N

Kit type	
VL	VMS Busbar kits between OT and OFAZ
VK	VMS cable kits between OT and Fuse holders

Dimension of box with cover (H x W x D)			
32	320 x 220 x 179	**63**	640 x 320 x 179
33	320 x 320 x 179	**64**	640 x 440 x 179
43	440 x 320 x 179		

Orientation			
H	Horizontal	**-**	Universal
V	Vertical		

Amp rating			
40	40A	**400**	400A / DIN2
63	63A	**630**	630A / DIN3
125	125A	**800**	800A
160	160A / DIN00	**1000**	1000A
250	250A / DIN1		

Application	
P	Phase
PEN	Combined neutral and earth

Individual parts

Boxes

Cabinettype	
V	VMS

VMS box type			
32	VMS 32	**XX**	General
33	VMS 33	**X2**	Side 220
43	VMS 43	**X3**	Side 320
63	VMS 63	**X4**	Side 440
64	VMS 64		

Type			
B	Base	**W**	Frame wall mounting
M	Metal mounting plate	**S**	Busbar support
I	Insulated mounting plate	**A**	Accessory
C	Cover	**P**	Cover plate
E	Entry plate	**R**	Rails and connectivity
H	Height extension frame		
F	Frame floor mounting		

Cover			
W	Without cover	**T**	Transparant cover
O	Opague cover	**P**	Pivoting cover

Application	
NJ	General application

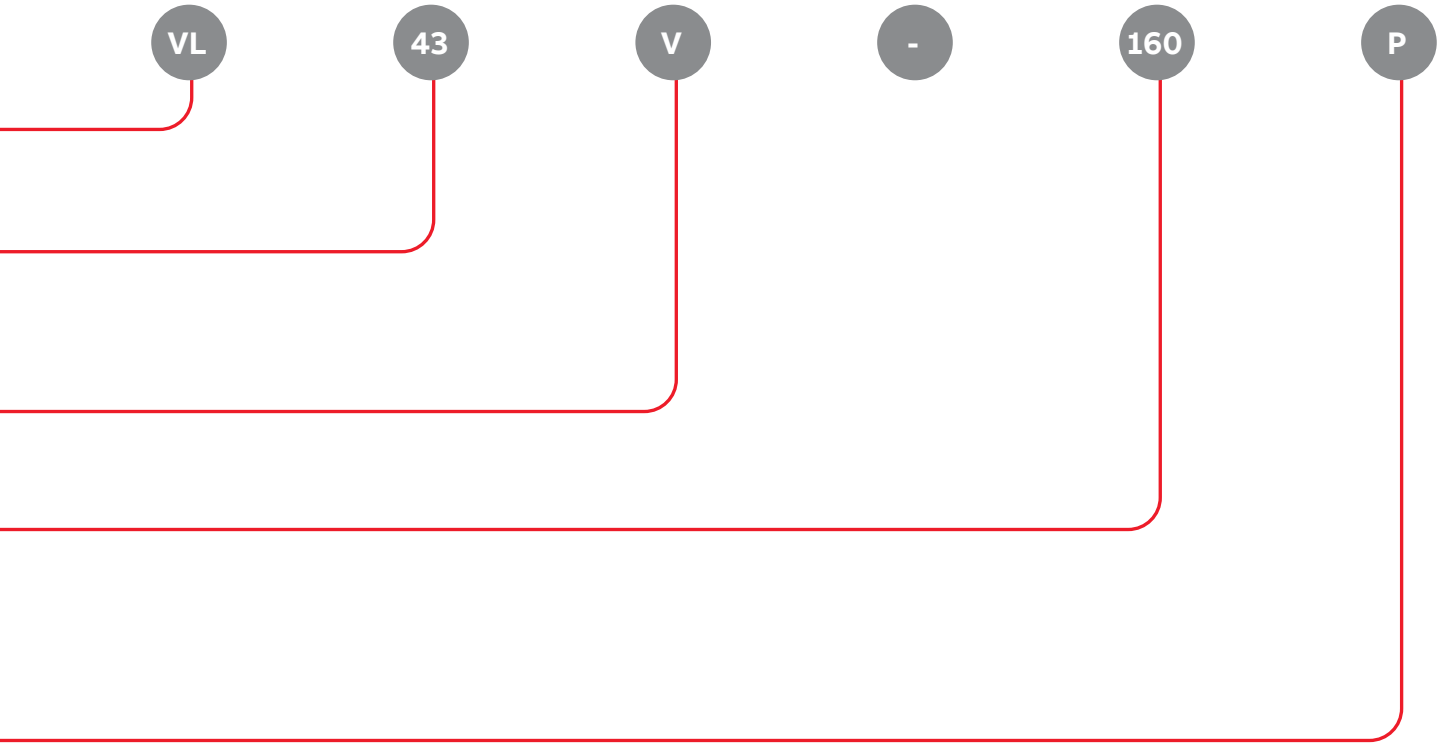
VL
43
V
-
160
P

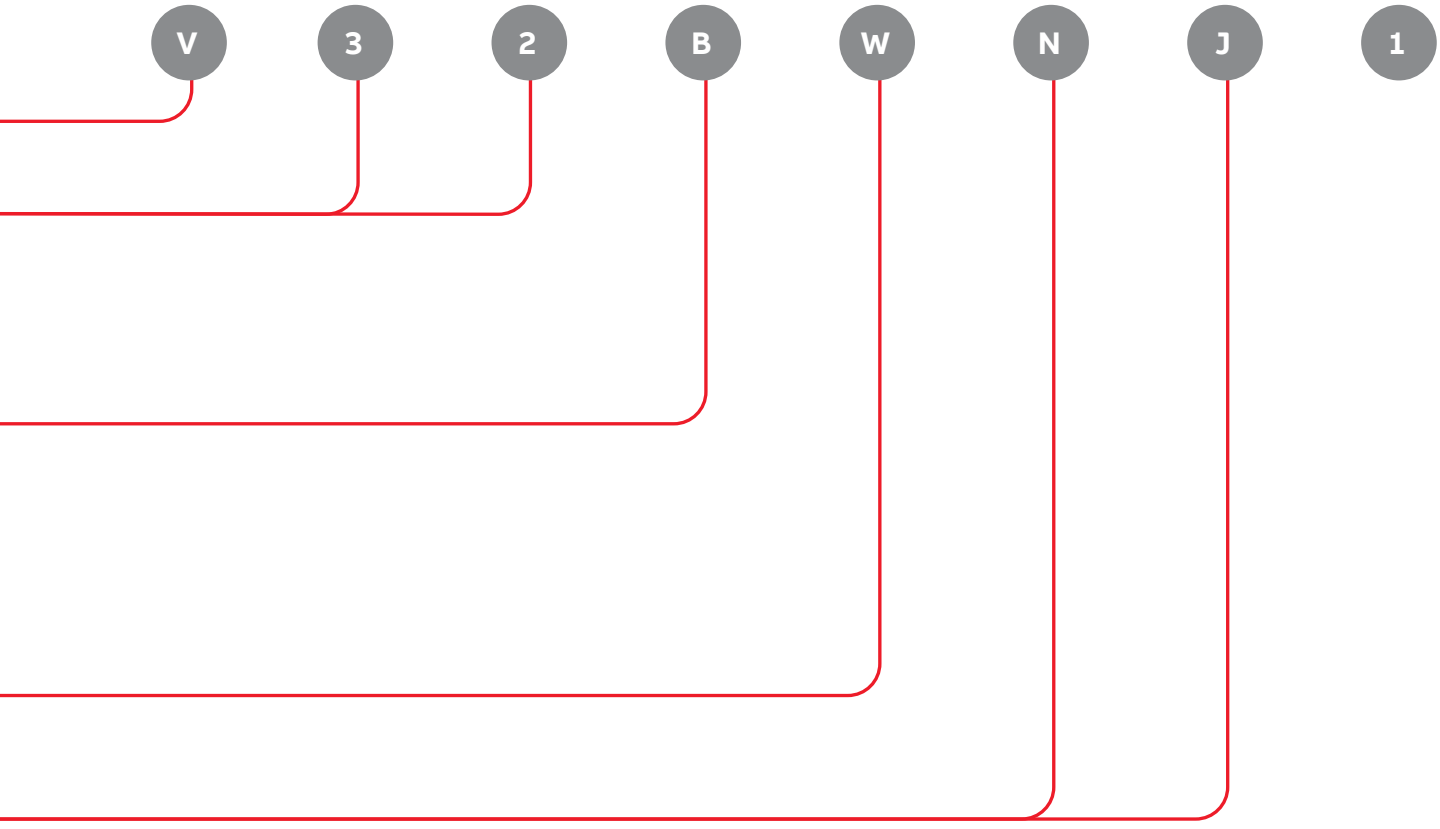
V
3
2
B
W
N
J
1

General purpose enclosures

ARIA - Universal polyester enclosures

ARIA

Applications

- Manufacturing
- Breweries
- Steelworks
- Public works
- Petro-chemical industry
- Road signage
- Temporary connections
- Telecoms
- Solar energy applications

Standard: EN/IEC 61439-2, EN/IEC 60529, EN/IEC 62262, EN/IEC 62208

Standards/Certification

- UL types 3, 3R, 3S, 4, 4X, 12 and 13
  Available upon request.

- CSA types 3, 3R, 3S, 4, 4X, 12 and 13
  Available upon request.

Specifications

- Seven different types, from 315 x 215 to 1035 x 835 mm.
- Enclosures made from light gray polyester (RAL 7035), hot press molded, glass fiber-reinforced, dyed in the mass.
- The enclosure is equipped with 4 threaded rods and 4 nuts for securing a mounting plate or frame and is equipped as standard with a double-bit key lock.
- Maximum protection for the user and equipment thanks to its total insulation ⧈ and IP65/66 protection rating in accordance with EN/IEC 62208 (IP54 for enclosures with inspection windows).
- IK08 protection rating against external mechanical impacts in accordance with EN/IEC 62208 (IK07 for cabinets with windows).
- Polyester boxes can resist temperatures of up to 70°C under continuous operation and peak temperatures of up to 130 °C.
- Self-extinguishing polyester, halogen-free.
- Insulation voltage U_i = 1000 V ac and 1500 V dc.

General purpose enclosures

ARIA - Universal polyester enclosures

1. Monobloc base
2. Detachable door, left-hand or right-hand opening
3. No water stagnation on the seal
4. Mounting point in the door
5. Front plate:
   - polyester RAL 7035
   - hinged
   - detachable
   - stand-alone
   -sealable
   - quick installation
   3-point closure lock
6. Interchangeable cylinders
7. Individual connection busbars
8. Mounting frame:
   - removable
   - perforated
   - reinforced DIN rails
9. Integral hinges 180° pivoting door
10. Mounting plate
    - metal
    - pertinax
    - perforated
11. Mounts directly onto the wall or via external mounting lugs made from stainless or synthetic material

General purpose enclosures

ARIA - Universal polyester enclosures

	Type		ARIA 32	ARIA 43
	Individual front plates H x W x D		315 x 215 x 170	415 x 315 x 170
	Enclosure ▣ IP65 - IK08. With one or two double-bit, 3 mm locks	**Type**	-	AR043P13[1]
		Order code		4TBA831035C0100
	two-point closure			
	Enclosure with inspection window ▣ IP54 - IK07 With one or two double-bit, 3 mm locks	**Type**	-	AR043T33
		Order code		4TBA831128C0100
				single-point closure
				AR043P33
	Enclosure ▣ IP66 - IK08 With 1 double-bit, 3 mm center lock	**Type**	AR032P13[1]	
		Order code	4TBA831025C0100[2]	4TBA831036C0100[2]
	three-point closure mechanism			
	Enclosure with inspection window ▣ IP54 - IK07 with 1 double-bit, 3mm center lock	**Type**	-	AR043T23
		Order code		4TBA831815C0100
				AR043H33
	Enclosure ▣ IP66 - IK08 With 1 security lock handle	**Type**	AR032T13	
		Order code	4TBA831307C0100	4TBA831034C0100[2]
	Mounting plates			
	Dimensions H x W		250 x 150	350 x 250
	Pertinax 5 mm	**Type**	AR032I03	AR043I03
		Order code	4TBA831027C0100	4TBA831038C0100
	2 mm Sendzimir galvanized steel panel	**Type**	AR032M03	AR043M03
		Order code	4TBA831026C0100	4TBA831037C0100
	1.5 mm perforated metal panel	**Type**	AR032Q03	AR043Q03
		Order code	4TBA831332C0100	4TBA831333C0100
				AR043D03
	Mounting frame	**Type**	AR032D03	
		Order code	4TBA831030C0100	4TBA831041C0100
	Rows		2	2
	Modules		12	24
	Full cover plates			
	Solid	**Type**	AR032C03	AR043C03
		Order code	4TBA831028C0100	4TBA831039C0100
	With openings for DIN rail equipment	**Type**	AR032S03	AR043S03
		Order code	4TBA831029C0100	4TBA831040C0100
	With openings for individual modular front plates	**Type**	-	AR043E03
		Order code		4TBA831790C0100
	Number of individual modular front plates possible		-	2
	Note: the ARIA 43 and 86 cabinets and ARIA 64 and 108 cabinets contain the same modular closure plates (Closed and with openings)			
	Individual front plates H x W		-	150 x 239
	IP20 individual modular protective plates (PVC)			
	Solid	**Type**	-	AR043N03
		Order code		4TBA831797C0100
	With openings for DIN rail equipment	**Type**	-	AR043R03
		Order code		4TBA831796C0100
	Modules		-	12

(1) single-point closure
Pack = 1

(2) UL/CSA certified

General purpose enclosures

ARIA - Universal polyester enclosures



ARIA 54	ARIA 64	ARIA 75	ARIA 86	ARIA 108
515x415x230	615x415x230	735x535x270	835x635x300	1035x835x300
AR054P23	AR064P23	AR075P23	AR086P23	AR108P23
4TBA831809C0100	4TBA831810C0100	4TBA831811C0100	4TBA831059C0100	4TBA831073C0100
AR054T23	AR064T23	AR075T23	-	-
4TBA831812C0100	4TBA831813C0100	4TBA831814C0100		
two-point closure	two-point closure	two-point closure		
AR054P33	AR064P33	AR075P33	AR086P33	AR108P33
4TBA831052C0100[2]	4TBA831065C0100[2]	4TBA831081C0100[2]	4TBA831098C0100[2]	4TBA831112C0100[2]
AR054T33	AR064T33	AR075T33	AR086T33	AR108T33
4TBA831129C0100	4TBA831130C0100	4TBA831131C0100	4TBA831132C0100	4TBA831133C0100
AR054H33	AR064H33	AR075H33	AR086H33	AR108H33
4TBA831051C0100[2]	4TBA831064C0100[2]	4TBA831080C0100[2]	4TBA831097C0100[2]	4TBA831111C0100[2]
450 x 350	550 x 350	650 x 450	750 x 550	950 x 750
AR054I03	AR064I03	AR075I03	AR086I03	AR108I03
4TBA831054C0100	4TBA831067C0100	4TBA831083C0100	4TBA831100C0100	4TBA831114C0100
AR054M03	AR064M03	AR075M03	AR086M03	AR108M03
4TBA831053C0100	4TBA831066C0100	4TBA831082C0100	4TBA831099C0100	4TBA831113C0100
AR054Q03	AR064Q03	AR075Q03	AR086Q03	AR108Q03
4TBA831334C0100	4TBA831335C0100	4TBA831336C0100	4TBA831337C0100	4TBA831338C0100
AR054D03	AR064D03	AR075D03	AR086D03	AR108D03
4TBA831057C0100	4TBA831070C0100	4TBA831086C0100	4TBA831103C0100	4TBA831117C0100
3	3	4	4	5
54	54	88	96	180
AR054C03	AR064C03	AR075C03	AR086C03	AR108C03
4TBA831055C0100	4TBA831068C0100	4TBA831084C0100	4TBA831101C0100	4TBA831115C0100
AR054S03	AR064S03	AR075S03	AR086S03	AR108S03
4TBA831056C0100	4TBA831069C0100	4TBA831085C0100	4TBA831102C0100	4TBA831116C0100
AR054E03	AR064E03	AR075E03		AR108E03
4TBA831791C0100	4TBA831792C0100	4TBA831793C0100		4TBA831795C0100
3	3	4	8	10
150 x 343	150 x 343	150 x 239	150 x 239	150 x 343
AR054N03	AR064N03	AR075N03	AR043N03	AR064N03
4TBA831799C0100	4TBA831801C0100	4TBA831803C0100	4TBA831797C0100	4TBA831801C0100
AR054R03	AR064R03	AR075R03	AR043R03	AR064R03
4TBA831798C0100	4TBA831800C0100	4TBA831802C0100	4TBA831796C0100	4TBA831800C0100
17	18	22	12	18

General purpose enclosures

ARIA - Universal polyester enclosures - Accessories

Product	Type	Order code	Pack
Locks			
With interchangeable cylinders (Supplied with 1 key)			
	3mm		
	AR831008	4TBA831008C0100	1
	8mm		
	AR831005	4TBA831005C0100	1
	8mm		
	AR831006	4TBA831006C0100	1
	11mm		
	AR831007	4TBA831007C0100	1
	Other locks: please contact us.		
Handles			
①	Neutral handle (without lock)		
	AR831003	4TBA831003R0100	1
	With lock and 2 keys V2432E		
	AR831004	4TBA831004R0100	1
	With lock and 2 keys 1242E		
	AR831180	4TBA831180R0100	1
	With lock and 2 keys 405E		
	AR831152	4TBA831152C0100	1
	With lock and 2 keys 455E		
	AR831153	4TBA831153C0100	1
	Handle for lock, 45 mm semi-cylindrical profile		
②	AR831821	4TBA831821C0100	1
	For replacing a double-bit lock or other locks for Aria 54, a mechanical adaptation of the door openings is required.		
	Handle for lock with semi-cylindrical profile and locking by padlock		
③	AR831822	4TBA831822C0100	1
	For replacing a double-bit lock or other locks for Aria 54, a mechanical adaptation of the door openings is required.		

Product	Type	Order code	Pack
Fixing lugs(1)			
	In 304 grade stainless steel Set of 4 pieces		
	ARACCB03	4TBA831000C0100	1
	Set of 4 polyamide pieces		
	ARACCB13	4TBA831001C0100	1
	(1) not supplied as standard		
Hinge supports for inner door			
	Set of 2 pieces, for front plate		
	AR831010	4TBA831010C0100	1
	A lower door may be installed together with a closed front plate.		
Profile half cylinder locks			
Standard: D = 40 mm - L = 30.5 mm			
	With 2 keys V2432-E		
	PS832030	4TBP832030C0100	1
	Replacement keys for 832030		
	PS832022	4TBP832022C0100	2
	With 2 keys 1242-E		
	PS832031	4TBP832031C0100	1
	With 2 keys 455-E		
	PS832465	4TBP832465C0100	1
	With 2 keys 405-E		
	PS832466	4TBP832466R0100	1
	With a replacement key, 8 mm		
	PS832032	4TBP832032C0100	1
	With an 8 mm triangular key		
	PS832033	4TBP832033C0100	1
	With an 11 mm triangular key		
	PS832034	4TBP832034C0100	1
	With 3 mm double-bit key		
	PS832029	4TBP832029C0100	1
Vents			
(IP44 if fitting in the double corner)			
	Set of 2 ventilation grilles. Bore hole Ø 34.9 mm		
	AR831009	4TBA831009C0100	1
	See Sect. Cabinet ventilation for additional ventilation options.		

General purpose enclosures

ARIA - Universal polyester enclosures - Accessories

Product	Type	Order code	Pack
Pole mounting assembly			
	For ARIA 54/64		
	AR891608	4TBA891608C0100	1
	Fixing lugs in stainless steel included. Steel strips not included.		
Self-adhesive drip molding profile			
	Length 415 mm for ARIA 54 and 64		
	AR831530	4TBA831530C0100	1
	May also be used for ARIA 32 and 43 after cutting out.		
	Length 835 mm for ARIA 108		
	AR831533	4TBA831533C0100	1
	May also be used for ARIA 75 and 86 after cutting out.		
Replacement doors ARIA			
Replacement opaque doors with 3-point locking system (hinge pins are not included)			
	ARIA 43 door		
	AR831033	4TBA831033N0100	1
	ARIA 54 door		
	AR831050	4TBA831050N0100	1
	ARIA 64 door		
	AR831063	4TBA831063N0100	1
	ARIA 75 door		
	AR831079	4TBA831079N0100	1
	ARIA 86 door		
	AR831096	4TBA831096C0100	1
	ARIA 108 door		
	AR831110	4TBA831110C0100	1

Product	Type	Order code	Pack
Module covers			
	Sectionable by 1/2 module		
	12 modules		
	FORSTBP4	4TBR610142C0200	5
	4 modules		
	FORSTBP500	4TBR610484C0200	500
Label holders			
	Adhesive		
	ZA10	4TBC851321C0100	1m
Document pocket			
	DIN A4 - L x H = 325 x 180 mm		
	AR811516	4TBC811516C0100	1
	DIN A5 - L x H = 155 x 225 mm		
	PS832000	4TBP832000C0100	1
Slide nuts			
For perforated mounting plate			
	M4		
	AR831328	4TBA831328C0100	50
	M5		
	AR831329	4TBA831329C0100	50
	M6		
	AR831330	4TBA831330C0100	50
Hinge pins			
	Length 66 mm for ARIA 32		
	AR831653	4TBA831653C0100	20
	Length 100.5 mm for ARIA 43, 54 and 64		
	AR831652	4TBA831652C0100	20
	Length 131.5 mm for ARIA 75, 86 and 108		
	AR831953	4TBA831953C0100	10

General purpose enclosures

PolySafe - Multi-function polyester enclosures

PolySafe

Standard: EN/IEC 60529, EN/IEC 61439-2, EN/IEC 62208, EN/IEC 62262

Specifications

- 16 standard dimensions (from 500 x 500 mm to 1250 x 1000 mm) with a depth of 320 mm.
- Enclosures supplied assembled.
- IP65 high protection ratings in accordance with EN/IEC 60529 and IK10 (20J) in accordance with EN/IEC 62262.
- Protection rating for enclosure with inspection window: IP54-IK07.
- Material: polyester reinforced with glass fiber, halogen-free, hot press molded and self-extinguishing.
- Color: RAL 7035 gray, dyed in the mass.
- Designed for wall, floor or pedestal mounting.
- Option of stacking vertically or horizontally widthwise or depthwise.
- Total insulation ⧈.
- 5-point door closure mechanism.
- Optional version on a DIN base.
- Insulation voltage Ui = 1000 V ac and 1500 V dc
- Product is easy to recycle: no molded metal parts.

Standards/Certification

- Single-door enclosure: type 3, 3R, 3S, 4, 4X, 12, 12K and 13
- Double-door enclosure: type 3R
- Coupled enclosures: type 3, 3R, 3S, 4, 4X, 12, 12K and 13 Available upon request.

Conditions for use

Polyester boxes can withstand temperatures between -25°C et +70°C under continuous operation and peak temperatures of up to 130°C.

General purpose enclosures

PolySafe - Multi-function polyester enclosures

Applications

- Commercial
  Leisure (marketplaces, camps, leisure ports, attraction parks, etc.), gas stations, carwashes, laundromats, industrial laundries, construction site enclosures, etc.

- Industrial
  Ship building, mining, automobile industry, paper industry, sugar refinery, food industry, distilleries, petrochemical industry, heavy industry, processing, surveillance systems, etc.

- Utilities
  Water treatment sites, gray water processing. telecommunications, traffic signaling, traffic management, public transport, energy distribution (electricity, gas, water), cable television, public lighting, railways, etc.

General purpose enclosures

PolySafe - Universal polyester enclosures





Depth = 320 mm		PS 220
Factory-assembled enclosures Equipped with AISI 304 stainless steel fixing lugs and handle (lock not supplied)		
Dimensions (H x L)		500 x 500
Enclosure with **IP65** solid door	**Type**	PS220P63
	Order code	4TBP833000C0100[1]
Enclosure with **IP54** inspection window (polycarbonate inspection window)	**Type**	PS220T43
	Order code	4TBP833850C0100
Weight (kg)		16
IP65 depth extension kit For increasing the standard depth of the enclosure from 320 mm to 640 mm. The kit comprises 2 side panels, 1 upper panel, 1 lower panel, 2 rear open panels (frames).	**Type**	PS220D63
	Order code	4TBP833584C0100
Hoods Necessary if efficient (IP44) ventilation is required, includes drilled holes in the upper panel and the use of fins.	**Type**	PS200R03
	Order code	4TBP833566C0100
The basic enclosure is IP65 rated, the hood is optional.		
Base for ground installation The enclosure and base are anchored together into the ground. H = 65 mm	**Type**	PS200Z03
	Order code	4TBP833574C0100
Adaptor frame for DIN-base mounting The enclosure and adaptation kit are anchored together onto the DIN socket (polyester)	**Type**	-
	Order code	
DIN base Polyester - RAL 7035	**Type**	EH3SEXEI
	Order code	4TBE843204R0100
Mounting plates Dimensions (H - 110 mm x L - 110 mm)		
2 mm Sendzimir galvanized sheet metal	**Type**	PS220M03
	Order code	4TBP833500C0100
Pertinax 5 mm	**Type**	PS220I03
	Order code	4TBP833508C0100
Pertinax 10mm	**Type**	-
	Order code	

(1) UL/CSA certified

General purpose enclosures

PolySafe - Universal polyester enclosures

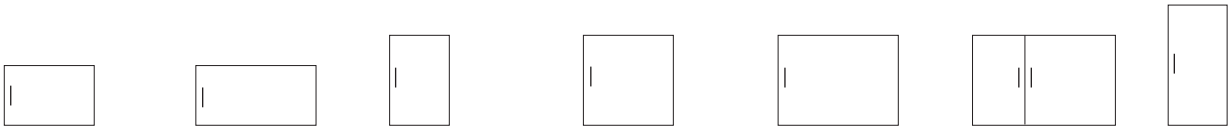

PS 230	PS 240	PS 320	PS 330	PS 340	PS 352	PS 420
500 x 750	500 x 1000	750 x 500	750 x 750	750 x 1000	750 x 1250	1000 x 500
PS230P63	PS240P63	PS320P63	PS330P63	PS340P63	PS352P63	PS420P63
4TBP833004C0100[1]	4TBP833193C0100[1]	4TBP833008C0100[1]	4TBP833012C0100[1]	4TBP833016C0100[1]	4TBP833020C0100[1]	4TBP833024C0100[1]
PS230T43	-	PS320T43	PS330T43	PS340T43	PS352T43	PS420T43
4TBP833851C0100		4TBP833852C0100	4TBP833853C0100	4TBP833854C0100	4TBP833855C0100	4TBP833856C0100
19	25	20	25	30	38	25
PS230D63	-	PS320D63	PS330D63	PS340D63	PS350D63	PS420D63
4TBP833585C0100		4TBP833586C0100	4TBP833587C0100	4TBP833588C0100	4TBP833589C0100	4TBP833590C0100
PS300R03	PS400R03	PS200R03	PS300R03	PS400R03	PS500R03	PS200R03
4TBP833568C0100	4TBP833570C0100	4TBP833566C0100	4TBP833568C0100	4TBP833570C0100	4TBP833572C0100	4TBP833566C0100
PS300Z03	PS400Z03	PS200Z03	PS300Z03	PS400Z03	PS500Z03	PS200Z03
4TBP833575C0100	4TBP833576C0100	4TBP833574C0100	4TBP833575C0100	4TBP833576C0100	4TBP833577C0100	4TBP833574C0100
PS300A03	PS400A03	-	PS300A03	PS400A03	-	-
4TBP833582C0100	4TBP833583C0100		4TBP833582C0100	4TBP833583C0100		
EH3SE1EI	EH3SE2EI	EH3SEXEI	EH3SE1EI	EH3SE2EI	-	EH3SEXEI
4TBE843206R0100	4TBE843207R0100	4TBE843204R0100	4TBE843206R0100	4TBE843207R0100		4TBE843204R0100
PS320M03	PS420M03	PS320M03	PS330M03	PS430M03	PS530M03	PS420M03
4TBP833501C0100	4TBP833503C0100	4TBP833501C0100	4TBP833502C0100	4TBP833504C0100	4TBP833506C0100	4TBP833503C0100
PS320I03	PS420I03	PS320I03	PS330I03	PS430I03	PS530I03	PS420I03
4TBP833509C0100	4TBP833511C0100	4TBP833509C0100	4TBP833510C0100	4TBP833512C0100	4TBP833514C0100	4TBP833511C0100
-	-	-	-	-	PS833385	-
					4TBP833385N0100	

(*) on request

General purpose enclosures

PolySafe - Universal polyester enclosures







Depth = 320 mm		PS 430
Factory-assembled enclosures Equipped with AISI 304 stainless steel fixing lugs and handle (lock not supplied)		
Dimensions (H x L)		1000 x 750
Enclosure with **IP65** solid door	**Type**	PS430P63
	Order code	4TBP833028C0100[2]
Enclosure with **IP54** inspection window (polycarbonate inspection window)	**Type**	PS430T43
	Order code	4TBP833857C0100
Weight (kg)		30
IP65 depth extension kit For increasing the standard depth of the enclosure from 320 mm to 640 mm. The kit comprises 2 side panels, 1 upper panel, 1 lower panel, 2 rear open panels (frames).	**Type**	PS430D63
	Order code	4TBP833591C0100
Hoods Necessary if efficient (IP44) ventilation is required, includes drilled holes in the upper panel and the use of fins.	**Type**	PS300R03
	Order code	4TBP833568C0100
The basic enclosure is IP65 rated, the hood is optional.		
Base for ground installation The enclosure and base are anchored together into the ground. H = 65 mm	**Type**	PS300Z03
	Order code	4TBP833575C0100
Adaptor frame for DIN-base mounting The enclosure and adaptation kit are anchored together onto the DIN socket (polyester)	**Type**	PS300A03
	Order code	4TBP833582C0100
DIN base Polyester - RAL 7035	**Type**	EH3SE1EI
	Order code	4TBE843206R0100
Mounting plates Dimensions (H - 110 mm x L - 110 mm)		
2 mm Sendzimir galvanized sheet metal	**Type**	PS430M03
	Order code	4TBP833504C0100
Pertinax 5 mm	**Type**	PS430I03
	Order code	4TBP833512C0100
Pertinax 10mm	**Type**	-
	Order code	

(2) UL/CSA certified

General purpose enclosures

PolySafe - Universal polyester enclosures

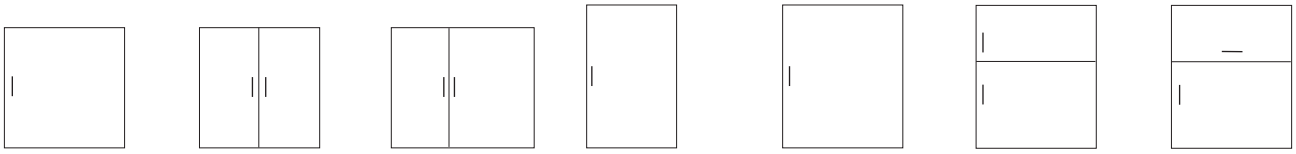

PS 440	PS 442	PS 452	PS 530	PS 540[1]	PS 542	PS 546
1000 x 1000	1000 x 1000	1000 x 1250	1250 x 750	1250 x 1000	1250 x 1000	1250 x 1000
PS440P63	PS442P63	PS452P63	PS530P63	PS833889	PS542P63	PS833056
4TBP833032C0100²	4TBP833036C0100²	4TBP833040C0100²	4TBP833044C0100²	4TBP833889C0100	4TBP833052C0100²	4TBP833056C0100²
-	PS442T43	PS452T43	PS530T43	-	PS542T43	-
	4TBP833858C0100	4TBP833859C0100	4TBP833860C0100		4TBP833861C0100	
36	39	41	37	42	45	45
PS440D63	PS440D63	PS833593	PS530D63	-	-	-
4TBP833592C0100	4TBP833592C0100	4TBP833593C0100	4TBP833594C0100	-	-	-
PS400R03	PS400R03	PS500R03	PS300R03	PS400R03	PS400R03	PS400R03
4TBP833570C0100	4TBP833570C0100	4TBP833572C0100	4TBP833568C0100	4TBP833570C0100	4TBP833570C0100	4TBP833570C0100
PS400Z03	PS400Z03	PS500Z03	PS300Z03	PS400Z03	PS400Z03	PS400Z03
4TBP833576C0100	4TBP833576C0100	4TBP833577C0100	4TBP833575C0100	4TBP833576C0100	4TBP833576C0100	4TBP833576C0100
PS400A03	PS400A03	-	PS300A03	PS400A03	PS400A03	PS400A03
4TBP833583C0100	4TBP833583C0100		4TBP833582C0100	4TBP833583C0100	4TBP833583C0100	4TBP833583C0100
EH3SE2EI	EH3SE2EI	-	EH3SE1EI	EH3SE2EI	EH3SE2EI	EH3SE2EI
4TBE843207R0100	4TBE843207R0100		4TBE843206R0100	4TBE843207R0100	4TBE843207R0100	4TBE843207R0100
PS440M03	PS440M03	PS540M03	PS530M03	PS540M03	PS540M03	PS540M03
4TBP833505C0100	4TBP833505C0100	4TBP833507C0100	4TBP833506C0100	4TBP833507C0100	4TBP833507C0100	4TBP833507C0100
PS440I03	PS440I03	PS540I03	PS530I03	PS540I03	PS540I03	PS540I03
4TBP833513C0100	4TBP833513C0100	4TBP833515C0100	4TBP833514C0100	4TBP833515C0100	4TBP833515C0100	4TBP833515C0100
PS833386	PS833386	PS833387	PS833385	PS833387	PS833387	PS833387
4TBP833386C0100	4TBP833386C0100	4TBP833387C0100	4TBP833385N0100	4TBP833387C0100	4TBP833387C0100	4TBP833387C0100

(1) PolySafe PS540 only available in IP54 execution
(*) on request

General purpose enclosures

PolySafe - Modular framework for DIN-rail equipment - IP20



Supplied as a self-assembly kit
Kit contains:
- 2 x support for left-hand vertical profile
- 2 x support for right-hand vertical profile
- 2 x vertical profiles
- 2 x IP20 insulated vertical profiles
- 2 x IP20 insulated horizontal profiles
- assembly accessories

Product	Type	Order code
2 rows		
	40 mod. - H x L = 500 x 500	
	PS220F03	4TBP833264C0100
	68 mod. - H x L = 500 x 750	
	PS230F03	4TBP833265C0100

Product	Type	Order code
4 rows		
	80 mod. - H x L = 750 x 500	
	PS320F03	4TBP833266C0100
	136 mod. - H x L = 750 x 750	
	PS330F03	4TBP833267C0100

Product	Type	Order code
6 rows		
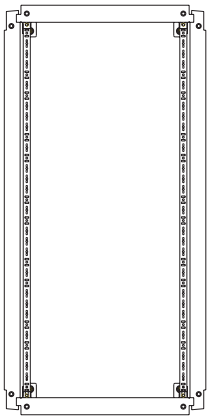	120 mod. - HxL = 1000x500	
	PS420F03	4TBP833268C0100
	204 mod. - HxL = 1000x750	
	PS430F03	4TBP833269C0100

Product	Type	Order code
7 rows		
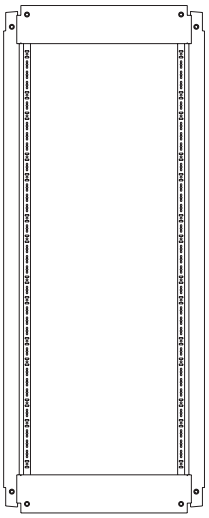	238 mod. - HxL = 1250x750	
	PS530F03	4TBP833270C0100

General purpose enclosures

PolySafe - Modular functions and accessories

Modular functions for DIN equipment (to be mounted on the modular frame)

Contents:
- DIN rail
- cover plate with rectangular opening
- mounting accessories

Center line distance 150mm			
Height	Width	500mm	750mm
150mm			
	Modules (1 mod. = 18mm)	20	34
	Type	PS833272	PS833278
	Order code	4TBP833272C0100	4TBP833278C0100

Modular functions for terminals or other equipment (to be mounted on the modular frame)

Contents:
- DIN rail
- solid cover plate
- mounting accessories

Center line distance 150mm			
Height	Width	500mm	750mm
150mm			
	Type	PS833271	PS833277
	Order code	4TBP833271C0100	4TBP833277C0100
300mm			
	Type	PS833274	PS833280
	Order code	4TBP833274C0100	4TBP833280C0100

Accessories (to be mounted on the modular frame)

Product	Type	Order code	Pack
Metal mounting plates			
	H x L = 150 x 500 mm		
	PS833275	4TBP833275C0100	1
	H x L = 150 x 750 mm		
	PS833281	4TBP833281C0100	1
	H x L = 300 x 500 mm		
	PS833276	4TBP833276C0100	1
	H x L = 300 x 750 mm		
	PS833282	4TBP833282C0100	1

Accessories (to be mounted on the modular frame)

Product	Type	Order code	Pack
Depth extension studs for metal mounting plates with n. 2 M5×10 screws - (1 set = 2 pieces)			
	Length 20-35-50 mm		
	VMW2050	4TBW828059C0100	1
	Length 25-40-55 mm		
	VMW2555	4TBW828060C0100	1
	Length 30-45-60 mm		
	VMW3060	4TBW828061C0100	1
	Length 65-80-95 mm		
	VMW6595	4TBW828062C0100	1
	Length 70-85-100 mm		
	VMW70100	4TBW828063C0100	1
	Length 75-90-105 mm		
	VMW75105	4TBW828064C0100	1
	Length 110-125-140 mm		
	VMW110	4TBW828031C0100	1

General purpose enclosures

PolySafe - Accessories

Product	Type	Order code	Pack
Profile half cylinder locks			
Standard: D = 40 mm - L = 30.5 mm			
	With 2 keys V2432-E		
	PS832030	4TBP832030C0100	1
	Replacement keys for PS832030		
	PS832741	4TBP832741R0100	2
	With 2 keys 1242-E		
	PS832031	4TBP832031C0100	1
	With 2 keys 455-E		
	PS832465	4TBP832465C0100	1
	With 2 keys 405-E		
	PS832466	4TBP832466R0100	1
	With 1 square key, 8 mm		
	PS832032	4TBP832032C0100	1
	With an 8mm triangular key		
	PS832033	4TBP832033C0100	1
	With an 11 mm triangular key		
	PS832034	4TBP832034C0100	1
	With 1 double-bit key, 3 mm		
	PS832029	4TBP832029C0100	1

Product	Type	Order code	Pack
Handle			
	For lock with half cylinder profile (as replacement)		
	PS833629	4TBP833629C0100	1

Product	Type	Order code	Pack
Padlocking handle			
	For padlock (Ø 10 mm max.)		
	PS833630	4TBP833630R0100	1

Product	Type	Order code	Pack
Depth adjustment kit			
	Set of 4 brackets for adjusting the depth of the mounting plates (12.5 mm increments)		
	PS833528	4TBP833528C0100	1

Product	Type	Order code	Pack
Door stop/Canopy stop			
Opening angle of 100° of the door or canopy (for >750-wide enclosures)			
	Left turning		
	PS833649	4TBP833649C0100	1
	Right turning		
	PS833650	4TBP833650C0100	1

Product	Type	Order code	Pack
Wall mounting supports for standard cabinets			
	Kit comprising 4 fixing lugs that clip into the rear of the enclosure. In Type 304 grade stainless steel. (replacement)		
	PS833651	4TBP833651C0100	1

Product	Type	Order code	Pack
Wall fixing lugs for enclosures equipped with a hood.			
	Kit comprising 4 fixing lugs that clip into the rear of the enclosure.		
	PS833624	4TBP833624C0100	1

Product	Type	Order code	Pack
Rainhood			
	Rainhoods for enclosure combinations. Standard rainhoods in the enclosure selection tables.		

For enclosures dimensions (WxD)			
1500 x 320 mm	PS833656	4TBP833656C0100	1
1750 x 320 mm	PS833657	4TBP833657C0100	1
2000 x 320 mm	PS833658	4TBP833658C0100	1
2250 x 320 mm	PS833659	4TBP833659C0100	1
2500 x 320 mm	PS833660	4TBP833660C0100	1
3000 x 320 mm	PS833661	4TBP833661C0100	1
500 x 640 mm	PS833693	4TBP833693C0100	1
750 x 640 mm	PS833692	4TBP833692C0100	1
1000 x 640 mm	PS833783	4TBP833783C0100	1
1250 x 640 mm	PS833784	4TBP833784C0100	1
1750 x 640 mm	PS833743	4TBP833743C0100	1
2000 x 640 mm	PS833691	4TBP833691C0100	1

General purpose enclosures

PolySafe - Accessories

Product	Type	Order code	Pack
Pole mounting			
	Width = 500 mm		
	PS833625	4TBP833625C0100	1
	Width = 750 mm		
	PS833626	4TBP833626C0100	1
	By C profiles, at the rear of the enclosure and affixed to the lugs. Metal sheet is used for securing to the pedestal. Securing clamps are attached to the profiles to ensure that the metal sheet is held fast.		

IP65/IP54 coupling kit					
H/B	**G**	**J**	**Depth 320 mm**		
500	330	6	PS833608	4TBP833608R0100	1
750	580	8	PS833610	4TBP833610R0100	1
1000	830	12	PS833612	4TBP833612R0100	1
1250	1080	14	PS833614	4TBP833614R0100	1

The kit contains neoprene seal and securing screws.



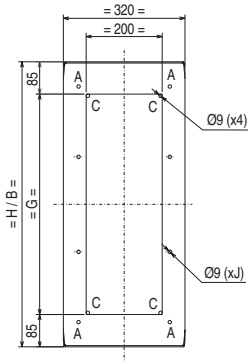

Corner profile			
To fill up the corner between two coupled enclosures			
	Length = 308mm		
	PS833653	4TBP833653R0100	1
	Use 2 profiles when coupling n.4 enclosures		



Product	Type	Order code	Pack
IP20 inner door			
HxW			
	500 x 500 mm		
	PS833556	4TBP833556C0100	1
	500 x 750 mm		
	PS833557	4TBP833557C0100	2
	750 x 500 mm		
	PS833558	4TBP833558C0100	1
	750 x 750 mm		
	PS833559	4TBP833559C0100	1
	1000 x 500 mm		
	PS833561	4TBP833561C0100	1
	1000 x 750 mm		
	PS833562	4TBP833562C0100	1
	Frame and door with two double-bit closures. For control and automation applications.		

Replacement doors PolySafe			
Replacement opaque doors			
	Door 750X750 mm for PS330		
	PSD33	4TBP833211N0100	1
	Door 1000X1000 mm for PS440		
	PSD44	4TBP833217C0100	1
	Door 1250X750 mm for PS530		
	PSD53	4TBP833218N0100	1
	Door 500X500 mm for PS220		
	PSD22	4TBP833222C0100	1
	Door 500X750 mm for PS230		
	PSD23	4TBP833223N0100	1
	Door 750X1000 mm for PS340		
	PSD34	4TBP833225N0100	1
	Door 1000X500 mm for PS420/442 right compartment		
	PSD42	4TBP833226N0100	1
	Door 1000X750 mm for PS430/452 right compartment		
	PSD43	4TBP833227C0100	1
	Door 500X1000 mm for PS542 upper compartment		
	PSD24	4TBP833236N0100	1
	Door 1000X500 mm for PS442/452 left compartment		
	PSD42L	4TBP833238C0100	1

General purpose enclosures

PolySafe - Accessories

Product	Type	Order code	Pack
Ventilation grille ▣			
	PS832019	4TBP832019C0100	1
	Adaptable to the ventilation opening. Kit comprises 2 grilles and 4 nylon screws.		
Air vents IP44			
	Set of 2 polyamide pieces RAL 7035		
	PS833677	4TBP833677C0100	1
	2 fins must be provided per enclosure in order to provide efficient ventilation and to prevent the formation of condensation. Supplied with a template and fixings. It is recommended to install the fins in the upper and lower sections of the enclosure.		
Screws			
	Mounting plate installation kit (8 nuts and bolts).		
	PS833790	4TBP833790C0100	1 set
	7.2 x 22 + M8 x 19 assembly screws for assembling the mounting plate and side panel with the lower panel/hood.		
	PS833687	4TBP833687C0100	100
	7.2 x 22 securing screw for rear panel		
	PS833688	4TBP833688C0100	100

Product	Type	Order code	Pack
Document pocket			
	DIN A4 - B x L = 325 x 180 mm		
	AR811516	4TBC811516C0100	1
	DIN A5 - B x L= 155 x 225 mm		
	PS832000	4TBP832000C0100	1

General purpose enclosures

PolySafe - accessories

Product	Type	Order code	Pack
Nut made from insulating material			
	RAL 7035		
	KIM601225	4TBC601225C0100	100
Screws			
	M6 flange screw		
	ACC811483	4TBC811483C0100	100
	PVC M6 screw for cover plate (sealable)		
	ACC811451	4TBC811451R0100	100
Metal nut			
	M6		
	ACC811435	4TBC811435C0100	100
	M6		
	ACC811446	4TBC811446C0100	100
	M8		
	ACC811447	4TBC811447C0100	100

General purpose enclosures

PolySafe - accessories

Product	Type	Order code	Pack
Brackets			
	L = 40 - A = 24 - C = 9,5		
	ACC811478	4TBC811478R0100	100
	L = 80 - A = 64 - C = 9,5		
	ACC811479	4TBC811479R0100	100
			
	L = 120 - A = 64 - C = 49,5 - E = 41.5		
	ACC811480	4TBC811480C0100	100
			

Product	Type	Order code	Pack
Spacers			
Type 1 - M4-M6			
	L = 15		
	ACC811336	4TBC811336C0100	100
			

Product	Type	Order code	Pack
Spacers			
Type 2 - M6-M6			
	L = 15		
	ACC811337	4TBC811337C0100	100
	L = 20		
	ACC811338	4TBC811338C0100	100
	L = 25		
	ACC811454	4TBC811454R0100	100
	L = 30		
	ACC811339	4TBC811339C0100	100
	L = 35		
	ACC811455	4TBC811455R0100	100
	L = 45		
	PS811456	4TBP811456R0100	100
	L = 55		
	ACC811457	4TBC811457R0100	100
	L = 65		
	ACC811458	4TBC811458R0100	100
	L = 70		
	ACC811340	4TBC811340C0100	100
	L = 80		
	ACC811460	4TBC811460R0100	100
	L = 100		
	ACC811461	4TBC811461R0100	100
	L = 120		
	ACC811341	4TBC811341C0100	100

Product	Type	Order code	Pack
Spacers			
Type 3 - M6-M6			
	L = 60		
	ACC811342	4TBC811342C0100	100
	L = 30		
	ACC811343	4TBC811343C0100	100
			

Notes

General purpose enclosures

Accessories - Heater units

Function
Small heaters for electrical enclosures are important accessories for ensuring the operational safety of control and distribution assemblies.
They are essentially used to prevent the formation of condensation or to ensure that a minimum temperature is maintained inside the electrical enclosures, i.e. at a few degrees above ambient temperature.

Operating principle
The small heaters are equipped with PTC heating resistors (semiconductors with a positive temperature coefficient). The self-regulating and self-limiting semiconductor heating elements maintain a constant temperature over the heating surface of the small heaters. The aluminum body transfers heat to the surrounding air through natural radiation. Special extruded profiles guarantee perfect heat radiation.

Calculation model for determining the power requirement
According to the formula: **$P = A \times \Delta T \times k$**

P = power to be supplied via the resistor (W)
A = exterior free surface of the enclosure (m^2)
ΔT = temperature difference between the interior temperature after heating and the exterior temperature in °K.
k = thermal radiation coefficient:
steel: 5.5 W/m^2K
polyester: 3.5 W/m^2K

Rule of thumb: recommended value 100 W/m^3 of enclosure volume. The calorific value must be doubled for an exterior installation. Multiple small heaters are preferable to a single heater unit.

Advantages
- Energy efficiency
- Dynamic heating
- Self-regulating
- Self-limiting
- Quick clip-in fitting
- Zero maintenance
- Long service life
- Compact unit

Standards
EN 60335-1 / EN 62233
UL
EAC

Applications
Electrical enclosures, instrumentation units, display panels, control cabinets,
ATM machines, access control system for parking lots, etc.

Installation
Quick installation on 35 mm DIN rail (EN 50 022).
Recommended installation in the lower section of the enclosure, at least 40 mm from the equipment itself.

General purpose enclosures

Accessories - Heater units

CSK 060

CS 060

CSF 060

CSK 060

Small heating resistor for compact boxes and enclosures, to prevent the formation of condensation or temperatures below a minimum threshold. The resistors have been designed for permanent use.

CS 060 / CSF 060

Compact heating resistor to regulate the temperature of cabinets and enclosures containing electrical and electronic components. Due to its construction, it produces optimized natural convection, which generates an effective flow of hot air. The plastic casing has been designed so that the surface temperature remains low. The heating resistor is equipped by default with a fixed-range thermostat. The thermostat connects directly to the heating resistor and requires no additional wiring. The resistors have been designed for permanent use. The resistor is also available as a version without a thermostat (CS 060 series).

Technical specifications

Nominal voltage	120-240 V(1) AC/DC (min. 110 V, max. 265 V)
Heating element	PTC resistor, self-regulating
Surface temperature	< +85°C (+185°F) (in accordance with VDE 0100), except for the protective grille
Connection	2.5 mm² 2-pole terminal, max. tightening torque 0.8 Nm
Box	plastic material in accordance with UL94 V-0, black
Attachment	clip for 35 mm DIN rail, EN 60715
Installation	vertical air flow (blowing upwards/connection below)
Operating/storage temperature	-45 to +70°C (-49 to +158°F)
Operating/storage humidity	max. 90% RH (condensation-free)
Protection rating	IP20/class II (double insulation)
Certification	VDE, UL, EAC
Note:	other voltage options upon request

(1) For power supplies below 140 V AC/DC, heat production is reduced by 10%.

Ordering information CSK 060, CS 060

	W(1)	I max. (A)	H x W x D (mm)	Weight (kg)	Type	Order code	Pack
CSK 060	10	0.8	98 x 38 x 75	0.2	ACC818225	4TBJ818225C0100	1
	20	2.5	98 x 38 x 75	0.3	ACC818226	4TBJ818226C0100	1
CS 060	50	2.5	110 x 60 x 90	0.3	ACC818227	4TBJ818227C0100	1
	100	4.5	110 x 60 x 90	0.5	ACC818228	4TBJ818228C0100	1
	150	8	150 x 60 x 90	0.5	ACC818229	4TBJ818229C0100	1

(1) Bij omgevingstemperatuur van 20 °C

Ordering information CSF 060

W(1)	I max. (A)	H x W x D (mm)	Cut-out temperature(2)	Start-up temperature(2)	Weight (kg)	Type	Order code	Pack
50	2.5	110 x 60 x 90	+15 °C	+5 °C	0.3	ACC818230	4TBJ818230C0100	1
50	2.5	110 x 60 x 90	+25 °C	+15 °C	0.3	ACC818231	4TBJ818231C0100	1
100	4.5	110 x 60 x 90	+15 °C	+5 °C	0.3	ACC818232	4TBJ818232C0100	1
100	4.5	110 x 60 x 90	+25 °C	+15 °C	0.3	ACC818233	4TBJ818233C0100	1
150	8	150 x 60 x 90	+15 °C	+5 °C	0.5	ACC818234	4TBJ818234C0100	1
150	8	150 x 60 x 90	+25 °C	+15 °C	0.5	ACC818235	4TBJ818235C0100	1

(1) At an ambient temperature of 20°C
(2) Tolerance of ±5 K

General purpose enclosures

Accessories - Heaters

CS 028 / CSL 028

Heating resistor for maintaining a constant temperature inside the enclosures. Prevents malfunctions due to the formation of condensation or ice. Connection via an internal terminal. Thanks to their reduced dimensions, the CS 028 and CSL 028 heating resistors are ideal for installation in enclosures and cabinets with restricted space.

Technical specifications

Heating element	PTC resistor, self-regulating
Surface temperature	150 W/250 W: max. +50°C (+122°F), 400 W: max. 65°C (149°F), with the exception of the upper protective grille, for an ambient temperature of +20°C (+68°F)
Axial fan, with ball bearing roller bearing	air flow rate, unimpeded blowing, CS 028: 13.8 m^3/h, CSL 028: 45 m^3/h (230 V AC), 54 m^3/h (120 V AC), life cycle 40,000 h at +40 °C (+104°F)
Connection	2.5 mm^2 2-pole terminal (CSL 028 with cable gland), max. tightening torque 0.8 Nm
Box	plastic material in accordance with UL94 V-0, black
Attachment	clip for 35 mm DIN rail, EN 60715 or screw attachment (Ø 5.3 mm)
Installation	vertical air flow (blowing upwards)
Operating/storage temperature	-45 to +70°C (-49 to +158°F)
Operating/storage humidity	max. 90% RH (condensation-free)
Certification	IP20/class II (double insulation)
Directives	file no. UL E150057 (in accordance with UL 508A, NITW file upon request), EAC, 230 V only: VDE

Ordering information CSL 028

Type	Nominal voltage	Heating power(1)	Max. start-up current	Fuse (slow-blow)	Dimensions (mm)	Weight (ca) (kg)	Type	Order code	Pack
CS 028	230 V, 50 / 60 Hz	150 W	12.0 A	10.0	75 x 65 x 90	0.3	ACC818242	4TBJ818242C0100	1
CSL 028	230 V, 50 / 60 Hz	250 W	9.0A	10.0	90 x 85 x 111	0.5	ACC818243	4TBJ818243C0100	1
CSL 028	230 V, 50 / 60 Hz	400 W	15.0A	16.0	90 x 85 x 111	0.5	ACC818244	4TBJ818244C0100	1

(1) At an ambient temperature of 20°C

General purpose enclosures

Accessories - Heaters

CSF 028

Compact blown-air heating resistor to maintain a constant temperature inside cabinets and enclosures containing electrical and electronic components. Prevents the formation of condensation or ice. Thanks to their reduced dimensions and anti-touch casing, this heating resistor is ideal for installation in enclosures and cabinets with restricted space. CSF 028 is equipped with a pre-set thermostat. Connection via external terminals. The resistor may be installed in two ways: by threaded bracket or by clip. Mounting by threaded bracket is highly robust and is particularly suitable for applications subjected to strong vibration.

Technical specifications

Heating element	PTC resistor, self-regulating
Surface temperature	250 W: max. +50°C (+122°F), 400 W: max. +65°C (+149°F) m.u.v. bovenliggend roosteroppervlak bij +20°C (+68°F) omgevingstemperatuur
Temperature limiter	prevents any overheating in the event of fan failure, automatic reactivation
Axial fan, with ball bearing roller bearing	air flow rate, unimpeded blowing, CSF 028: 45 m^3/h (230 V AC), 54 m^3/h (120 V AC), life cycle 40,000 h at +40 °C (+104°F)
Connection	2.5 mm^2 double 2-pole spring terminal for solid cable or 1.5 mm^2 for multi-strand wire with terminal connectors
Box	plastic material in accordance with UL94 V-0, black
Attachment	clip for 35 mm DIN rail, EN 60715 or screw attachment (Ø 5.5 mm), max. tightening torque 2 Nm, washers recommended
Installation	vertical air flow (blowing upwards) and horizontal
Dimensions	model with clip/screw attachment: 105 x 85 x 118 mm
Weight	model with clip/screw attachment: 0.5 kg
Operating/storage temperature	+40 to +70°C (-40 to +158°F) / -45 to +70°C (-49 to +158°F)
Operating/storage humidity	max. 90% RH (condensation-free)
Usage classification	IP20/class II (total insulation)
Certification	VDE, UL File No. E150057, EAC

Ordering information CSF 028

Type	Nominal voltage	Heating power(1)	Max. start-up current	Fuse (slow-blow)	Cut-out temperature(2)	Start-up temperature(2)	Type	Order code	Pack
CSF 028	AC 230 V, 50 / 60 Hz	250 W	9.0	10.0	+15°C (+59°F)	+5°C (+41°F)	ACC818247	4TBJ818247C0100	1
CSF 028	AC 230 V, 50 / 60 Hz	250 W	9.0	10.0	+25°C (+77°F)	+15°C (+59°F)	ACC818248	4TBJ818248C0100	1
CSF 028	AC 230 V, 50 / 60 Hz	400 W	15.0	16.0	+15°C (+59°F)	+5°C (+41°F)	ACC818245	4TBJ818245C0100	1
CSF 028	AC 230 V, 50 / 60 Hz	400 W	15.0	16.0	+25°C (+77°F)	+15°C (+59°F)	ACC818246	4TBJ818246C0100	1

(1) At an ambient temperature of +20°C (+68°F); ² tolerance ± 5 K
(2) Another start-up/cut-out temperature is available upon request.

General purpose enclosures

Accessories - Heaters

HVI 030 without fan

HVI 030

Compact heating resistor to regulate the temperature of cabinets and enclosures containing electrical and electronic components. Prevents malfunctions due to the formation of condensation or ice. The heating resistor may only be used in combination with a fan, but it is also available without an axial fan (self-installation). Choice of screw-attachment model or new rotary clip secured model. The latter is simple and quick to fit.

Technical specifications

Nominal voltage	230 V AC, 50 / 60 Hz
Heating element	hoogwaardig verwarmingspatroon
Temperature limiter	prevents any overheating in the event of fan failure, automatic reactivation, additional protection via an irreversible fuse
Axial fan, with ball bearing roller bearing	air flow rate of 150 m^3/h, unimpeded air flow life cycle 50,000 h at +25 °C (+77°F)
Connection	2.5 mm^2 double 3-pole spring terminal for solid cable or 1.5 mm^2 for multi-strand wire with terminal connectors
Box	plastic material in accordance with UL94 V-0, black
Attachment	rotary clip for 35 mm DIN rail, EN 60715
Installation	vertical air flow (blowing upwards)
Dimensions (H x W x D)	169 x 127 x 89 mm
Weight	1.3 kg approximately
Operating temperature	VDE: -10 to +50°C (+14 to +122°F) / UL: -10 to +40°C (+14 to +104°F)
Storage temperature	-45 to +70°C (-49 to +158°F)
Operating/storage humidity	max. 90% RH (condensation-free)
Protection rating	IP20/heating: class II (double insulation), fan: class I (grounded)
Certification	VDE, UL File No. E234324, EAC
Directives	other heating outputs and voltages available upon request

Important instruction: only use resistors with a fan (min. 150 m^3/h).
Risk of overheating!

Ordering information

	Heating power(1)	Type	Order code	Pack
HVI 030	500	ACC818236	4TBJ818236C0100	1
	600	ACC818237	4TBJ818237C0100	1
	700	ACC818238	4TBJ818238C0100	1
HVI 030 without fan	500	ACC818239	4TBJ818239C0100	1
	600	ACC818240	4TBJ818240C0100	1
	700	ACC818241	4TBJ818241C0100	1

(1) At an ambient temperature of 20°C

General purpose enclosures

Accessories - Heaters

350 W

475 / 550 W

Semi-conductor heating resistor to regulate the temperature inside electrical cabinets. Prevents malfunctions due to the formation of condensation or ice. The integral thermostat can be used to adjust the temperature.

Technical specifications

Nominal voltage	220-240 V AC, 50 / 60 Hz
Heating element	PTC resistor, self-regulating
Temperature limiter	prevents any overheating in the event of fan failure, automatic shut-down
Axial fan, with ball bearing roller bearing	air flow rate: see table, life cycle 50,000 h at +25 °C (+77°F)
Connection	2.5 mm² 2-pole terminal, max. tightening torque 0.8 Nm
Box	plastic material UL94 V-0, light gray
On/Off indicator	LED indicator
Attachment	clip voor 35 mm rail DIN, EN 60715
Installation	vertical air flow (blowing upwards)
Dimensions (H x W x D)	100 x 128 x 165 mm
Operating/storage temperature	-45 to +70°C (-49 to +158°F)
Operating/storage humidity	max. 90% RH (condensation-free)
Protection rating	IP20/class II (total insulation)
Certification	VDE, UL File No. E204590, EAC
Directives	other heating outputs and voltages available upon request

Ordering information

Nominal voltage	Heating power(1) (50 Hz)	Heating power(1) (60 Hz)	Max. start-up current	Air flow rate, unimpeded blowing	Temperature regulator adjustment range(2)	Weight (approx-imate)	Type	Order code	Pack
220-240 V AC, 50 / 60Hz	350 W	550 W	8.5A	45 m³/h	0°C to +60°C	1.1	ACC818193	4TBJ818193C0100	1
220-240 V AC, 50 / 60Hz	475 W	550 W	11.0A	35 m³/h	0°C to +60°C	0.9	ACC818249	4TBJ818249C0100	1
220-240 V AC, 50 / 60Hz	550 W	650 W	13.0A	45 m³/h	0°C to +60°C	1.1	ACC818250	4TBJ818250C0100	1

(1) At an ambient temperature of 20°C
(2) 7 K start-up temperature hysteresis (tolerance of ±4 K)

General purpose enclosures

Accessories - Heaters

CR 130

Powerful heating resistor to regulate the temperature of cabinets and enclosures containing electrical and electronic components. Prevents malfunctions due to the formation of condensation or ice. The plastic casing provides protection against burns when coming into contact with hot parts. The heating resistor is available with an integral temperature regulator or a fixed-range hygrostat.

Technical specifications

Heating element	PTC resistor, self-regulating
Temperature limiter	prevents any overheating in the event of fan failure, automatic shut-down
Axial fan, with ball bearing roller bearing	air flow rate of 160 m^3/h, unimpeded air flow life cycle 50,000 h at 25 °C (77°F)
Connection	2.5 mm^2 max. 2-pole with securing bolt cable gland, max. tightening torque 0.8 NM
Box	plastic material in accordance with UL94 V-0, black
Attachment	clip attachment for 35 mm DIN rail, EN 60715 or screw attachment (M6)
Installation	vertical air flow (blowing upwards) + other
Dimensions	182 x 160 x 120 mm
Weight	1.3 kg approximately
Operating/storage temperature	-45 to +70°C (-49 to +158°F)
Operating/storage humidity	max. 90% RH (condensation-free)
Protection rating	IP20/class II (total insulation)

Ordering information CS 130

Type	Nominal voltage	Heating power(1)	Adjustment range(2)	Fuse T (slow-blow)	Dimensions (mm)	Weight (approx-imate)	Type	Order code	Pack
CR 130	AC 230 V, 50 / 60Hz	950W	0°C to +60°C	6.3A	99 x 160 x 182	1.5	ACC818251	4TBJ818251C0100	1
CS 130	AC 230 V, 50 / 60Hz	1200W	Resistor without thermostat	10.0A	120 x 160 x 182	1.3	ACC818253	4TBJ818253C0100	1

(1) At an ambient temperature of 20°C
(2) 7 K start-up temperature hysteresis (tolerance of ±4 K)

General purpose enclosures

Accessories - Thermostat

KTO

KTS

Function

KTO and KTS elements regulate and control the temperature inside the enclosure by controlling the small heaters, fans, heat exchangers and cooling units.

KTO 011

Thermostat (contact normally closed) for heating resistor regulation. The contact is opened when the temperature increases.

KTS 011

Thermostat (contact normally open) for regulating filter fans, heat exchangers and air conditioning units or for triggering signals when the temperature threshold is exceeded. The contact is closed when the temperature increases.

Technical specifications

Type	KTO	KTS
Adjustment range: hysteresis temperature	+10 - +50°C or 0 - +60°C 7 K (±4 K tolerance)	+10 - +50°C or 0 - +60°C 7 K (±4 K tolerance)
Contact type	NC	NO
Power	250 V AC, 10 (2) A 120 V AC, 15 (2) A 30 W DC on 24 V DC to 72 V DC	250 V AC, 10 (2) A 120 V AC, 15 (2) 30 W DC on 24 V DC to 72 V DC
Max. start-up current	16 A AC for 10 s	16 A AC for 10 s
Weight	36 g	36 g
Dimensions (H x W x D) mm	60 x 33 x 43 mm	60 x 33 x 43 mm
Wiring diagram	red button: heating	blue button: cooling, ventilation, alarm signal
Protection rating	IP20	IP20
Connection	2-pole terminal, max. tightening torque 0.5 Nm: 2.5 mm² solid cable (AWG 16), 1.5 mm² flexible cable (AWG 14)	
Installation	clip for 35 mm DIN rail, EN 60715	
Box	plastic material UL94 V-0, light gray	
Anti-interference	N in accordance with VDE 0875	

Values between parentheses: inductive load cos φ = 0.80

Connection diagram

KTO



Heating
Fan, cooling element, alarm signal

KTS



Heating
Fan, cooling element, alarm signal

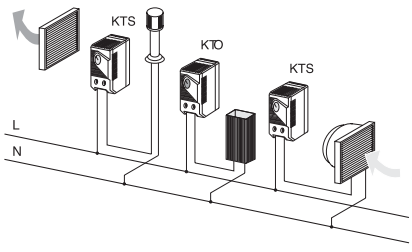

Ordering information

	Temperature	Type	Order code	Pack
KTO	-10° to +50°C	ACC818265	4TBJ818265C0100	1
KTO	0° to +60°C	ACC818080	4TBJ813530C0100	1
KTS	-10° to +50°C	ACC818266	4TBJ818266C0100	1
KTS	0° to +60°C	ACC818081	4TBJ813531C0100	1

General purpose enclosures

Accessories - Thermostat

FZK 011

ZR 011

ETR 011

Connection diagram

FZK 011



ZR 011



Normally closed: heating resistor
Normally open: air conditioning unit, filter fan or heat exchanger

ETR 011



Heating
Fan, cooling element, alarm signal

Function

FZK 011, ZR 011 and ETR 011 elements regulate and control the temperature inside the enclosure by controlling the small heaters, fans, heat exchangers and cooling units.

FZK 011

Mechanical thermostat used for controlling heating resistors, air conditioning units, filter fans or signaling. It obtains ambient temperature readings and can switch resistive and inductive loads thanks to its snap switching.

ZR 011

Two thermostats in one unit:

- thermostat (contact normally closed) for heating resistor regulation.;
- thermostat (contact normally open) for regulating filter fans, heat exchangers and air conditioning units or for triggering signals when the temperature threshold is exceeded.

Unlike a thermostat with inverter switch, the dual thermostat allows the heating resistor and air conditioning unit to be connected independently at different temperature ranges.

ETR 011

The mechanical thermostat is used for controlling heating resistors, air conditioning units, filter fans or signaling. The thermostat obtains ambient temperature readings and can switch resistive and inductive loads thanks to its inverter switch (relay). The LED integral to the adjustment button lights up when the contact is closed (when the heating resistor is in operation, for example).

Technical specifications

Type	FZK 011	ZR 011	ETR 011
Adjustment range: hysteresis temperature	+5 to +60°C or -20 - +35°C 0.5 K	0 to 60°C 7 K	+20°C 4 K (±1 K tolerance)
Contact type	switching contact: single-pole	NC	NO
Power	NC 10 A (4) 250 V AC NO 5 A (2) 250 V AC Resistive load	10 A (2) 250 V AC Resistive load	AC 240 V, 8 (1.6) A AC 120 V, 8 (1.6) DC 100 W to DC 24 V
Max. start-up current	-	-	16 A AC for 10 s
Weight	100 g	90 g	70 g
Dimensions (H x W x D) mm	67 x 50 x 38	60 x 50 x 46	64.5 x 42 x 38
Wiring diagram	(see left)	(see left)	/
Protection rating	IP20	IP20	IP20
Connection	2-pole terminal, max. tightening torque 0.5 Nm: 2.5 mm^2 solid cable (AWG 14) 1.5 mm^2 flexible cable (AWG 16)		
Installation	clip for 35 mm DIN rail, EN 60715		
Box	plastic material UL94 V-0, light gray		
Anti-interference	N in accordance with VDE 0875		

Values between parentheses = inductive load cos φ = 0.8

Ordering information

	Temperature	Type	Order code	Pack
FZK 011	+5° to +60°C	ACC818079	4TBJ818079C0100	1
FZK 011	-20° to +35°C	ACC818269	4TBJ818269C0100	1
ZR 011	0° to +60°C	ACC818217	4TBJ818217C0100	1

(1) At an ambient temperature of 20°C

General purpose enclosures

Accessories - Thermostat

FTO 011

FTS 011

Function

The mechanical thermostat is a dual switch with low hysteresis. The thumb wheel is for anti-icing adjustment. The casing ensures optimal air circulation around the bimetallic element.

STO 011

Thermostat (contact normally closed) for heating resistor regulation. The contact is opened when the temperature increases.

STS 011

Thermostat (contact normally open) for regulating filter fans, heat exchangers and air conditioning units or for triggering signals when the temperature threshold is exceeded. The contact is closed when the temperature increases.

Technical specifications

Type	
Hysteresis	4 K (±3 K tolerance)
Heat sensor	with bimetal element
Contact type	snap switching
Life cycle	> 100,000 cycles
Power	250 V AC, 10 (2) A 120 V AC, 15 (2) A 30 W DC on 24 V DC to 72 V DC
Max. start-up current	16 A AC for 10 s
Connection	2-pole terminal, max. tightening torque 1 Nm: 2.5 mm² flexible/solid cable (AWG 14)
Attachment	clip for 35 mm DIN rail, EN 60715
Box	plastic material UL94 V-0, light gray
Dimensions	70 x 33 x 42 mm
Weight	50 g approximately
Installation	mandatory
Operating/storage temperature	-45 to +80°C (-49 to +176°F)
Operating/storage humidity	max. 90% RH (condensation-free)
Protection rating	IP20
Certification	VDE, UL File No. E164102, EAC

Connection diagram

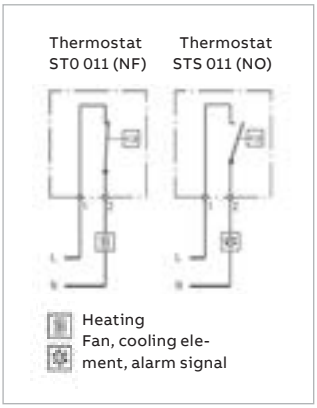

Ordering information

	Contact	Temperature	Type	Order code	Pack
STO 011	NC	0° to 60°C	ACC818267	4TBJ818267C0100	1
STS 011	NO	0° to 60°C	ACC818268	4TBJ818268C0100	1

General purpose enclosures

Accessories - Hygrotherm

ETF 012

The hygrostat/thermostat measures both temperature and humidity, and is able to activate heating or cooling independently.

Technical specifications

Adjustment range:	
- Temperature	0°C to 60°C
- Hysteresis	2K
- Relative humidity of the air	50% to 90%
- Rest time	160 secs.
Power supply voltage	100-240 V / 50-60 Hz
Contact type	relay output: NO/NF switch
Power output(1)	8 A (4) 250 V AC 0.5 A 100 V DC 8 A 12 V DC 5 A 35 V DC
On/Off indicator	LED
Weight	140 g
Dimensions (H x W x D)	50 x 67 x 43 mm
Protection rating	IP20
Connection	2.5 mm^2 screw-in terminals
Attachment	35 mm DIN rail(EN 50022)
Box	plastic UL 94 V0
Anti-interference	N in accordance with VDE 0875

(1) Values between parentheses: inductive load cos φ = 0.80

Connection diagram

EFT 012



Ordering information

	Type	Order code	Pack
ETF 012	ACC818083	4TBJ818083C0100	1
ETF 012 with external sensor	ACC818271	4TBJ818271C0100	1

General purpose enclosures

Accessories - Hygrostat

MFR 012

EFR 012

The humidity regulator is designed to control the temperature and air humidity inside the enclosure. The regulator is activated when the humidity level reaches 65%. In doing so, the system efficiently prevents the risk of condensation and corrosion.

Technical specifications

	MFR 012	EFR 012
Adjustment range	35 to 95% RV	40 to 90% RV
Switching hysteresis	tolerance of ±3 % RH	tolerance of ±3 % RH
Nominal voltage	250 V AC	230 V AC, 50/60 Hz
Switching capacity, max. load:		
- Resistive load	5 A 250 V	240 V AC, 8 (1.6) A
- Inductive load cos φ 0.8	0.2 A 250 V AC	120 V AC, 8 (1.6) A
- Inductive load L/R = 3 ms	1 A 50 V DC to 75 V DC	100 W AC to 24 V DC
Switching capacity, min. load:	100 mA DC / AC 20 V	
Contact type	CO NO / NC	CO (relay)
Connection	terminal plate inside the casing, 3 x 2.5 mm^2	5-pole terminal, max. tightening torque 0.5 Nm: 2.5 mm^2 solid/ flexible cable (AWG 14)
Box	plastic, light gray	plastic material UL94 V-0, light gray
Installation	35 mm DIN rail	clip for 35 mm DIN rail, EN 60715
Protection rating	IP20	IP20
Dimensions (H x W x D)	67 x 50 x 38 mm	64.5 x 42 x 38 mm
Weight	60 g	70 g

(1) Values between parentheses: inductive load cos φ = 0.80

Ordering information

	Type	Order code	Pack
MFR 012	ACC818190	4TBJ818190C0100	1
EFR 012	ACC818270	4TBJ818270C0100	1

Connection diagram

MFR 012



EFR 012

Heating
Fan, cooling element, alarm signal

General purpose enclosures

Accessories - Passive cabinet ventilation

The differences between ambient temperature and the temperature inside a cabinet with a high protection rating may generate variations in pressure. In the event of under-pressure, the cabinet may draw in dust and moisture. Any moisture trapped inside the cabinet will be deposited as condensation. This condensation can be prevented through the use of ventilation grilles.

Product	Type	Order code	Pack
IP44 ventilation grille			
Suitable for a ventilation opening Includes 2 grilles and 4 nylon nails. Total insulation.			
2000 mm² grille	PS832019	4TBP832019C0100	1
			
3000 mm² grille	PS832743	4TBP832743C0100	1
			
4500 mm² grille	PS832744	4TBP832744C0100	1
			

Product	Type	Order code	Pack
IP44 vent (RAL 7035)			
In order to guarantee sufficient ventilation and to avoid condensation, two vents must be installed; one at the top and a second one at the bottom. Kit includes: drilling template.			
Set of 2 polyamide pieces	PS833677	4TBP833677C0100	1
			

Product	Type	Order code	Pack
Vents (IPx4)			
Improve ventilation and prevent condensation. Recommended installation above or below the cabinet - M20			
	MB861728	4TBG861728R0100	25

Product	Type	Order code	Pack
IP55 pressure compensation plug			
Hermetically sealed cabinets and enclosures are subjected to thermal or exterior influences, which result in temperature fluctuations during changes in pressure. Pressure compensation plugs compensate for changes in pressure and prevent the ingress of dust and moisture. The plug is suitable for use in electrical cabinets and enclosures, in accordance with the DIN EN 62208 standard.			
Set of 2 pieces	ACC818078	4TBJ818078R0100	1

Technical specifications	
Dimensions	ø 65.5 mm x 30.5 mm
Cut-out	ø 37 mm
Attachment	PG 29 threaded or nut
Material	ABS/PC
Air inlet	±1.5 cm²
Protection rating	IP55
Note:	compensation for optimal pressure revolves around the use of 2 plugs, diagonally opposed. If the plug is not installed vertically, the protection rating is reduced to IP54.



Product	Type	Order code	Pack
Vents - IP44[1]			
Set of 2 pieces, bore diameter Ø 34.9 mm	AR831009	4TBA831009C0100	1

(1) If positioned in the corners of an Aria cabinet or under the hood of a PolySafe cabinet

General purpose enclosures

Accessories - Passive cabinet ventilation

Product		Type	Order code	Pack
Pressure regulator plug - IP66				
Set of 2 pieces				
	M40	ACC818223	4TBJ818223R0100	1
Highly resistant to poor weather conditions and UV, compliant with the UL746C standard	M40	ACC870418	4TBJ870418C0100	1
	M12	ACC818287	4TBJ818287C0100	1

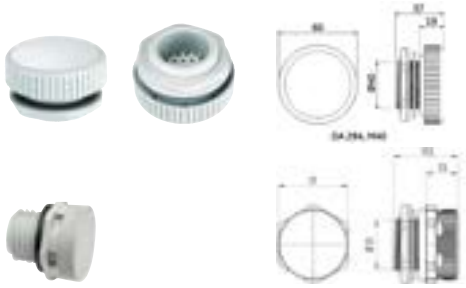

Installation	M40 x 1.5 or M12 x 1.5 thread with nut.
Torque	M40: 5 Nm, M12: 0.5 Nm
Mounting depth	M40: approximately 16 mm, M12: approximately 8 mm
Sealing	NBR seal
Filter	waterproof membrane
Dimensions	M40: Ø 60 x 37 mm, M12: Ø 17 x 17.5 mm
Installation	mandatory
Certification	UL (870418), EAC

Pressure compensation plug - IP66			
STAINLESS AISI 304	ACC818288	4TBJ818288C0100	1
STAINLESS AISI 304	ACC818289	4TBJ818289C0100	1
STAINLESS AISI 316L	ACC818290	4TBJ818290C0100	1

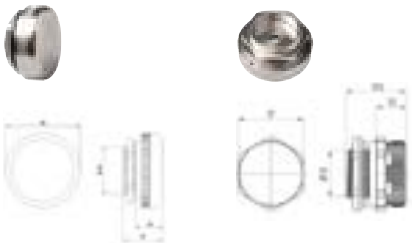

Installation	M40 x 1.5 thread with nut.
Torque	5 Nm
Mounting depth	9 mm approximately
Sealing	NBR seal
Filter	waterproof membrane
Air permeability	1200 l/h with a pressure difference of 70 mbar min.
Dimensions	Ø 58 x 31 mm
Installation	mandatory
Operating/storage temperature	-45 to +80°C (-49 to +176°F)
Certification	EAC

DAK 284

Product			Type	Order code	Pack
Ventilated cable gland - IP66/IP67					
Air permeability		**Torque**			
25 l/h	M12	2Nm	ACC818291	4TBJ818291C0100	1
25 l/h	M16	2Nm	ACC818292	4TBJ818292C0100	1
40 l/h	M20	5Nm	ACC818293	4TBJ818293C0100	1

Installation	M12 x 1.5 / M16 x 1.5 / M20 x 1.5 thread
Mounting depth	0.5 – 3 mm with nut
Material	plastic, light gray
Protection rating	IP66 / IP67 (EN 60529)
Sealing	NBR seal
Filter	PTFE
Installation	mandatory
Operating/storage temperature	-20 to +80°C (-4 to +176°F)
Certification	VDE, UL, EAC

Dimensions (mm)			
Type	ACC818291	ACC818292	ACC818293
Order code	4TBJ818291C0100 M12	4TBJ818292C0100 M16	4TBJ818293C0100 M20
L	8	10	10
D	4 - 8	4 - 8	6 - 12
SW1	19	19	24
SW2	18	22	26

DD 084

Product	Type	Order code	Pack
Drainage plug - IP66/IP67/IP69K			
	AC818294	4TBJ818294C0100	1

Torque	M12 x 1.5 / M16 x 1.5 / M20 x 1.5 thread
Mounting depth	0.5 – 3 mm with nut
Material	plastic in accordance with UL94 V-0, dark gray, highly resistant to poor weather conditions and UV, compliant with the UL746C standard
Protection rating	IP66 / IP67 (EN 60529)
Sealing	NBR seal
Filter	PTFE
Installation	mandatory
Operating/storage temperature	-20 to +80°C (-4 to +176°F)
Certification	VDE, UL, EAC

Installation instructions: drill a Ø 50.5+ mm hole in the lower section of the enclosure and install the drainage system with a nut. Important: the hole must have no burred edges and the seal must be fitted on the exterior side of the enclosure.

General purpose enclosures

Accessories - Ventilation kits

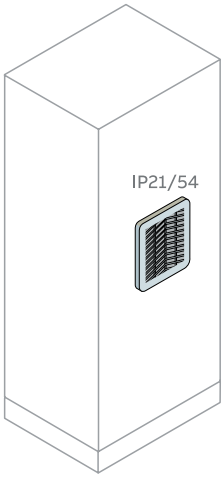

Temperature management

IP21/54 natural ventilation kit

Gratings made of insulating material (self-extinguishing ABS UL94V-0) RAL7035 colour, complete with high dust collection capacity filter cloth (600g/m²), able to reduce maintenance interventions (cleaning by means of washing in water or by beating). Degree of protection IP21 without filter, IP54 with filter according to IEC 60529, Type 1 without filter, Typer 12 with filter according to UL approval 508 fitted with pre-assembled gasket seal. CE and cURus approval.

Air entry surface for ventilation		Dimensions (mm)					
Without filter cm²	With filter cm²	W	W		Type	Order code	Package/ No. of pieces
Grille+air passage filter kit							
27	6	105	105		EN0105K		1/1
53	10	150	150		EN0150K		1/1
121	22	204	204		EN0204K		1/1
225	32	250	250		EN0250K		1/1
317	55	325	325		EN0325K		1/1

General purpose enclosures

Accessories - Ventilation kits

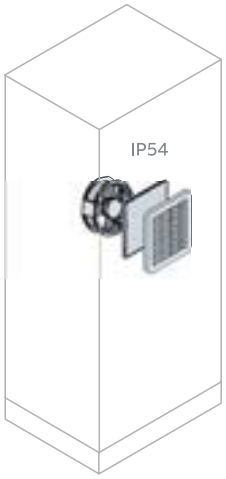

Temperature management

IP54 forced ventilation Kit

Grilles made of insulating material (ABS self-extinguishing UL94V-0) RAL7035 colour, complete with filter cloth with high dust accumulation capacity (600g/m^2), able to reduce maintenance interventions (cleaning by washing with water or beating). IP54 degree of protection with filter according to UL approval 508 fitted with pre-mounted tightness gasket. Operating temperature -10 °C + 50 °C. The fans allow reversible flow of air.
CE and cURus (see mark) approval.

Air entry surface for ventilation		Dimensions (mm)					Package/ No. of pieces
Consumption 50/60Hz (W)	Capacity 50/60Hz (m^3/h)	W	W		Type	Order code	
Ventilation filter with IP54 230V ~ fan							
10/8	23/30	105	105	cULus	EN1105K		1/1
20/19	57/61	150	150	cULus	EN1150K		1/1
17/15	120/135	204	204	cULus	EN1204K		1/1
29/29	240/270	250	250	cULus	EN1250K		1/1
67/87	520/580	325	325		EN2325K		1/1
Ventilation filter with IP 54 1150V~ fan							
9/7	23/30	105	105	cULus	EN2105K		1/1
20/18	57/61	150	150	cULus	EN2150K		1/1
17/15	120/135	200	200	cULus	EN2204K		1/1
30/30	240/270	250	250	cULus	EN2250K		1/1
50/64	520/580	325	325		EN3325K		1/1

General purpose enclosures

Accessories - General accessories

Cable gland - PG - IP54 polycarbonate (gray)

PG	D1 (mm)	Drill diameter ø (mm)	D3	D5	L5	S1	S2	Type	Order code	Pack
11	18.6	19	11	24	8	19	22	APACC851038	4TBO851038C0100	50
13.5	20.4	21	13	26.5	9	21	24	APACC851042	4TBO851042C0100	50
16	22.5	23	16	29.5	10	23	27	APACC851046	4TBO851046C0100	50
21	28.3	29	21	35	11	30	32	APACC851051	4TBO851051C0100	25
29	37	38	27.5	45	11	41	42	APACC851056	4TBO851056C0100	10
36	47	48	34	57	13	50	53	APACC851060	4TBO851060C0100	5
42	54	55	42	64	12.5	55	60	APACC851062	4TBO851062C0100	5

Nuts - Polycarbonate (gray)



PG	D	H	Type	Order code	Pack
11	25	5	APACC851075	4TBO851075C0100	50
13.5	27.5	5.5	APACC851076	4TBO851076C0100	50
16	31	6	APACC851077	4TBO851077C0100	50

Plugs (black)



A	B	C	Type	Order code	Pack
PG16	26	11	APACC851064	4TBO851064C0100	50
PG21	32	11.5	APACC851065	4TBO851065C0100	50
PG29	41	13	APACC851066	4TBO851066C0100	50
PG36	51	12.5	APACC851068	4TBO851068C0100	50

Pipe entries - Non-threaded (black)

Pipe ø	A	B	C	D	E	F	G	Type	Order code	Pack
5 / 8"	PG-16	26	17	21	14.1	15	9	APACC851069	4TBO851069C0100	20
3 / 4"	PG-16	26	20	24	16	21	9	APACC851070	4TBO851070C0100	20

Pipe entries - Non-threaded (black)



Pipe ø	A	B	C	D	E	F	G	Type	Order code	Pack
5 / 8"	PG-16	26	17	21	14.1	15	9	FOB61TUB3	4TBB600933C0200	25
3 / 4"	PG-16	26	20	24	16	21	9	FOB61TUB4	4TBB600934C0200	25

General purpose enclosures

Accessories - General accessories

Universal entries (gray)

	Cable Ø max.	PG	Drill diameter Ø (mm)	Color	Type	Order code	Pack
	18	16	23	gray	FORJRPG16	4TBR610130C0200	25
	24	21	29	gray	FORJRPG21	4TBR610132C0200	25
	32	29	38	gray	FORJRPG29	4TBR610133C0200	25
	49	42	54	gray	APACC852191	4TBO852191C0100	1

	Cable Ø min.	max.	Drill diameter Ø (mm)	Color	Type	Order code	Pack
	12	48	55	gray	APACC851096	4TBO851096C0100	20
	12	30	35	gray	APACC851097	4TBO851097C0100	20
	12	36	45	gray	APACC851098	4TBO851098C0100	20
	22	66	75	gray	APACC851099	4TBO851099C0100	10
	22	58	65	gray	APACC851100	4TBO851100C0100	10

Railstellen		Type	Order code	Pack
	- RSTN busbars - I = 63 A - Busbar cross-section 6.5 x 9 - DIN rail mounting - Peak current: 15 kA (10 msec)	ACC610022	4TBR610022C0200	18
	- RSTN busbars - Busbar cross-section 12 x 5 - I = 160A - DIN rail mounting - Peak current: 35kA (10 msec)	ACC610020	4TBR610020C0200	12
	- Protective screen for 610020	ACC610021	4TBR610021C0200	12
	- Busbars 12 x 5 - Length 1.2 m + 50 jumpers and 50 screws - Maximum span: 200 mm - To be combined with 610018 supports	ACC610017	4TBC610017C0100	10
	- Busbar support for four 12 x 5 busbars - Max. spacing of supports: max. 200 mm - DIN rail mounting - To be combined with the busbars above	ACC610018	4TBC610018C0100	1

(1) The ACC610017 and ACC610018 assembly has a peak current of: 15 kA (10 msec)

General purpose enclosures

Accessories - General accessories

Busbar/cable terminals			Type	Order code	Pack
	With 4 bypasses - For Al/Cu cable - Max. thickness: 12 mm - Width: unlimited	35-70 mm² + 4 bypasses (16 mm²)			
		2 cables	ACC779221	4TBC779221C0100	4
		3 cables	ACC779222	4TBC779222C0100	4
		90-150 mm² + 4 bypasses (25 mm²)			
		2 cables	ACC779218	4TBC779218C0100	4
		3 cables	ACC779219	4TBC779219C0100	4

Rubber insulation cap		Type	Order code	Pack
	For 35-70 mm² terminal			
		ACC779224	4TBC779224C0100	4
	For 95-150 mm² terminal			
		ACC779223	4TBC779223C0100	4

Connection busbars		Type	Order code	Pack
	- Phase - black - 6 x 10mm² and 2 x 16 mm² - Interlocking on flat bar 12 x 2 mm	FORSTTL	4TBR610185C0200	4
	- Ground - green - 6 x 10mm² and 2 x 16 mm² - Interlocking on flat bar 12 x 2 mm	FORSTTPE	4TBR610186C0200	4
	- Neutral - blue - 6 x 10mm² and 2 x 16 mm² - Interlocking on flat bar 12 x 2 mm	FORSTTN	4TBR610187C0200	4
	- 14 x 16 mm² - DIN rail mounting	ACC610065	4TBC610065C0100	4
	- Ground busbar - 12 x 4 with 3 terminals - Screw fixing	APACC851021	4TBO851021C0100	4

Busbar/busbar terminals						
	Main busbar	Secondary busbars	Min. total thickness	Clamped bars	Type	Order code	Pack
	20	15 - 20	5 - 4	26 - 24	APACC851120	4TBO851120C0100	10
	30	15 - 20 - 30	7 - 6 - 5	28 - 27 - 26	APACC851129	4TBO851129C0100	10

General purpose enclosures

Accessories - General accessories

Busbar/busbar terminals

	Cable max. Ø (mm^2)	Busbar thickness (mm)	Busbar width (mm)	Type	Order code	Pack
	10 to 50	5 to 6	30	APACC851117	4TBO851117C0100	10
	4 to 35	3 to 5	15	APACC851118	4TBO851118C0100	10

Terminal rosettes for 10-16 mm^2 Al and Cu cable

		Attachment	Ground clamp	H	Type	Order code	Pack
	- 4 split terminals with max. terminal connection: - Single tin pressure element: 4 x 4mm^2 - 4 x 6 mm^2 - 4 x 10 mm^2 - 3 x 16 mm^2 - Double tin pressure element: To be ordered separately	screw-fit	none	46	ACC779212	4TBC779212C0100	5
		on DIN rail	none	48	ACC779213	4TBC779213C0100	5
		screw-fit	included	46	ACC779214	4TBC779214C0100	5
		on DIN rail	included	48	ACC779215	4TBC779215C0100	5
		screw-fit	none	48	ACC890705	4TBC890705C0100	5

Double pressure element		Type	Order code	Pack
	Set of 4 securing nuts	ACC779216	4TBC779216C0100	1

Insulation cap		Type	Order code	Pack
	Made of rubber	ACC890704	4TBC890704C0100	20

General purpose enclosures

Accessories - General accessories

25-35 mm² terminal blocks		Type	Order code	Pack
 	- Without insulation caps - 1 securing nut - Al/Cu cable	ACC779201	4TBC779201C0100	10
	- 2 securing nuts - Al/Cu cable	ACC779202	4TBC779202C0100	10
	- With insulation caps - 2 securing nuts - Al/Cu cable	ACC779204	4TBC779204C0100	10
	- With insulation caps and attachment - 2 securing nuts - Al/Cu cable	ACC779205	4TBC779205C0100	10

Insulation cap		Type	Order code	Pack
		ACC890838	4TBC890838C0100	10

Double pressure element		Type	Order code	Pack
	Set of 4 securing nuts	ACC779203	4TBC779203C0100	10

Cable clamps for overhead lines	Cross-section	A	B	C	Type	Order code	Pack
	10 mm²	14	24	4.5	KIM601227	2CDB710029R0000	100
	16 mm²	22	29	5.5	KIM601228	2CDB710019R0000	50
	35 mm²	25	35	7.5	KIM601229	2CDB710022R0000	25
	50 mm²	28	43.5	9.0	KIM601230	2CDB710031R0000	25

Document pocket		Type	Order code	Pack
	DIN A4, 325 B x 180 H, self-adhesive - gray			
		PS811516	4TBC811516C0100	1
	DIN A5, 155 B x 225 H, self-adhesive - transparent			
		PS832000	4TBP832000C0100	1

Insulated cover plate (color: orange)		Type	Order code	Pack
	Thickness 3mm, 1900 x 900 x 3 mm			
		ACC811096	4TBC811096C0100	1

General purpose enclosures

Accessories - General accessories

Module covers		Type	Order code	Pack
	12 modules, sectionable by 1/2 module			
		FORSTBP4	4TBR610142C0200	5

Handle ▣		Type	Order code	Pack
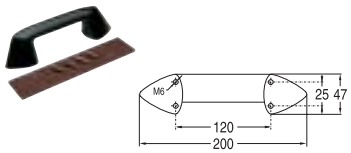	Height 50 mm, with reinforcement molding + Vyncolite screws			
		APACC851244	4TBO851244C0100	1

IP54 windows ▣		Type	Order code	Pack
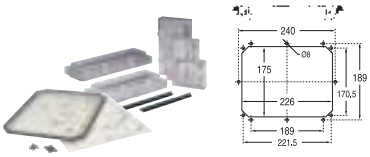	Includes a template and fixings			
	77 x 60 mm - 2 mod.	ACCWD2M	4TBO861395C0100	1
	77 x 96 mm - 4 mod.	ACCWD4M	4TBO861396C0100	1
	77 x 130 mm - 6 mod.	ACCWD6M	4TBO861397C0100	1
	77 x 163 mm - 8 mod.	ACCWD8M	4TBO861398C0100	1
	Screw-fit ▣ IP67	AP9X7WD	4TBO866001C0100	1

CSA UL types 3, 3R, 4, 4X, 12 and 13

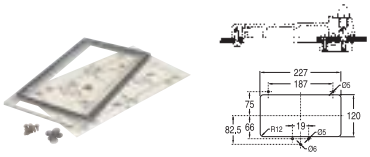	With hinges and seal ▣ IP55			
	77 x 60 mm - 2 mod.	APACC890837	4TBO890837C0100	1

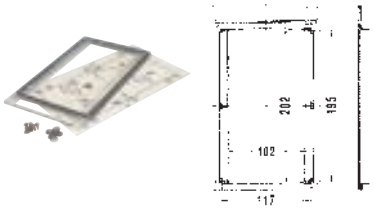	Screw-fit ▣ IP67, with label holders			
		AP8X4WDL	4TBO866002C0100	1

CSA UL types 3, 3R, 4, 4X, 12 and 13

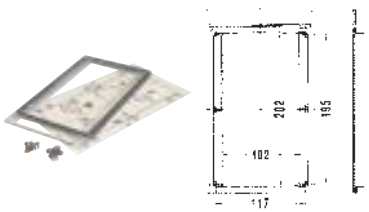	Screw-fit ▣ IP67, without label holders			
		AP8X4WD	4TBO866003C0100	1

CSA UL types 3, 3R, 4, 4X, 12 and 13

General purpose enclosures

Accessories - General accessories

M4 type rise pillars	L (mm)	Ø A	Ø B	Type	Order code	Pack
	10	M4	M4	APACC890800	4TBO890800C0100	50
	20	M4	M4	APACC890802	4TBO890802C0100	50
	25	M4	M4	APACC890803	4TBO890803C0100	50
	30	M4	M4	APACC890804	4TBO890804C0100	50
	60	M4	M4	APACC890805	4TBO890805C0100	50
	65	M4	M4	APACC890806	4TBO890806C0100	50
	97	M4	M4	APACC890807	4TBO890807C0100	20
	102	M4	M4	APACC890808	4TBO890808C0100	20

M6 type rise pillars	L (mm)	Ø	Type	Order code	Pack
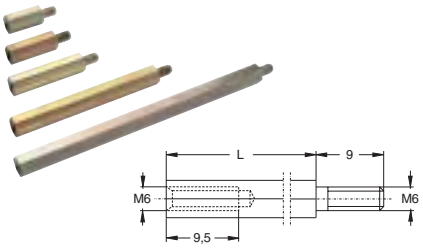	15	M6-M6	ACC811337	4TBC811337C0100	100
	20	M6-M6	ACC811338	4TBC811338C0100	100
	25	M6-M6	ACC811454	4TBC811454R0100	100
	30	M6-M6	ACC811339	4TBC811339C0100	100
	35	M6-M6	ACC811455	4TBC811455R0100	100
	45	M6-M6	PS811456	4TBP811456R0100	100
	55	M6-M6	ACC811457	4TBC811457R0100	100
	65	M6-M6	ACC811458	4TBC811458R0100	100
	70	M6-M6	ACC811340	4TBC811340C0100	100
	80	M6-M6	ACC811460	4TBC811460R0100	100
	100	M6-M6	ACC811461	4TBC811461R0100	100
	120	M6-M6	ACC811341	4TBC811341C0100	100

M6 type rise pillars	L (mm)	Ø	Type	Order code	Pack
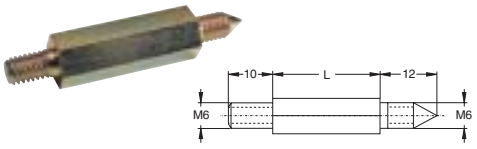	60	M6-M6	ACC811342	4TBC811342C0100	100
	30	M6-M6	ACC811343	4TBC811343C0100	100

M4-M6 Type			Type	Order code	Pack
	15	M6-M4	ACC811336	4TBC811336C0100	100

Insulated cap nuts (RAL 7035 Light Gray)	A	B	C	D	Ø E	Type	Order code	Pack
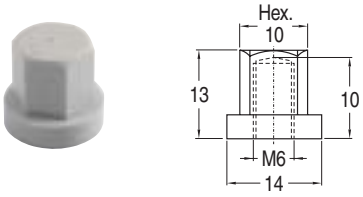	M4 15	13.5	8.5	M4	11	KIM601223	2CDB601223R0000	100
	M5 18	17.0	10	M5	14	KIM601224	4TBS601224C0200	100
	M6 22.3	20.4	9	M6	17	KIM601225N	4TBC601225C0100	100
	M8 25.3	24.2	10	M8	20	KIM601226	2CDB601226R0000	50

General purpose enclosures

Accessories - General accessories

Locks with semi-cylindrical profile M4 Type				
Standard: D = 40 mm - L = 30.5 mm		**Type**	**Order code**	**Pack**
	With 2 keys V2432-E	PS832030	4TBP832030C0100	1
	With 2 keys 1242-E	PS832031	4TBP832031C0100	1
	With 2 keys 455-E	PS832465	4TBP832465C0100	1
	With 2 keys 405-E	PS832466	4TBP832466R0100	1
	With 1 square key, 8 mm	PS832032	4TBP832032C0100	1
	With 1 square key, 8 mm	PS832033	4TBP832033C0100	1
	With 1 square key, 11 mm	PS832034	4TBP832034C0100	1
	With 1 double-bit key, 3 mm	PS832029	4TBP832029C0100	1

M4 type keys				
		Type	**Order code**	**Pack**
	For security lock no. V2432E	PS832022	4TBP832022C0100	2
	For security lock, 8 mm square	PS832026	4TBP832026C0100	1
	For security lock, 8 mm triangular	PS832027	4TBP832027C0100	1
	For security lock, 11 mm triangular	PS832072	4TBP832072C0100	1
	For security lock, double-bit 3 mm	PS832028	4TBP832028C0100	1

Screws				
		Type	**Order code**	**Pack**
	M6 flange screw			
		ACC811483	4TBC811483C0100	100
	PVC M6 screw for cover plate (sealable)			
		ACC811451	4TBC811451R0100	100

Brackets	L	A	C	E	Type	Order code	Pack
	40	24	9.5	-	ACC811478	4TBC811478R0300	100
	80	64	9.5	-	ACC811479	4TBC811479R0300	100
	120	64	49.5	41.5	ACC811480	4TBC811480C0100	100

Aluminum profiles				
		Type	**Order code**	**Pack**
	Profile length = 3 m			
		ACC811417	4TBC811417C0100	1

General purpose enclosures

Accessories - General accessories

Galvanized profiles			Type	Order code	Pack
		DIN profile 35 x 7.3 x 1 Length: 3m	APACC890847	4TBO890847C0100	1
		C profile 30 x 15 x 1.5 Length: 3m	ACC811619	4TBC811619C0100	1
		Slide nuts for C profile 30 x 15 M6	ACC811363	4TBC811363C0100	25
		Slide nuts for C profile 25 x 10 M6	ACC811365	4TBC811365C0100	50
		Jumpers + screws M5 x 13 Max. 2 x 10 mm² per jumper	APACC851123	4TBO851123C0100	10

Metal nuts			Type	Order code	Pack
		M6	ACC811435	4TBC811435C0100	100
		M4	ACC811438	4TBC811438C0100	100
		M6	ACC811446	4TBC811446C0100	100
		M8	ACC811447	4TBC811447C0100	100

General purpose enclosures

Accessories - General accessories

Slide nuts		Type	Order code	Pack
	For perforated mounting plate			
	M4 bolt	AR831328	4TBA831328C0100	50
	M5 bolt	AR831329	4TBA831329C0100	50
	M6 bolt	AR831330	4TBA831330C0100	50

Rise pillars		Type	Order code	Pack
	For mounting on symmetrical DIN rail, height: 21 mm			
		ACC610312	4TBC610312C0100	10

Mounting equipment		Type	Order code	Pack
	Slide + M4 screw			
		APACC890835	4TBO890835C0100	10
	Slide + washer + M4 screw			
		APACC890836	4TBO890836C0100	10
	M5 screw for meter L = 21 mm			
		APACC890844	4TBO890844C0100	20
	M 4 x 8 screw			
		APACC890849	4TBO890849C0100	50
	M4 slider			
		APACC890841	4TBO890841C0100	50
	M4 washer			
		APACC890850	4TBO890850C0100	20
	Coupling set			
		APACC890840	4TBO890840C0100	20

General purpose enclosures

Accessories - General accessories



Profiles	Profile length	Enclosure width	Type	Order code	Pack
	Type AB (C 15 x 8)				
	100 mm	150	APACC890809	4TBO890809C0100	10
	135 mm	185	APACC890812	4TBO890812C0100	10
	250 mm	300	APACC890817	4TBO890817C0100	10
	Type UB(1)				
	90mm	150	APACC890810	4TBO890810C0100	10
	100mm	150	APACC890811	4TBO890811C0100	10
	135mm	185	APACC890814	4TBO890814C0100	10
	200mm	250	APACC890816	4TBO890816C0100	10
	250mm	300	APACC890820	4TBO890820C0100	10
	276mm	300	APACC890819	4TBO890819C0100	10
	320mm	370	APACC890824	4TBO890824C0100	10
	550mm	600	APACC890833	4TBO890833C0100	10
	Type ZB (C 15 x 8)				
	476 mm	55	APACC890830	4TBO890830C0100	10

(1) DIN 46.277

Notes

Gemini: the improved range
Robust and flexible thermoplastic enclosures

Six different box sizes with internal space which accomodates from 24 to 216 DIN modules

Opaque or transparent doors, opening at more than 180°.

Ready-to-use interior distribution kits are available to quickly install all the devices without using tools.

Gemini is compliant to IEC62208 and UL 508A standards. IP66 certifies Gemini is completely protected against the infiltration of solid bodies and is resistant to the penetration of jets of water similar to sea waves.

High resistance: flexible and extremely sturdy. Resistant to harsh environments, chemical and atmospheric agents.

Suitable for outdoor installations, in any operating conditions: IP66, IK10, GWT=750°C, -25°C to 100°C.

Easy to install

Ready-to-use solutions are available to quickly install all the devices without using tools.

High degree of protection

Extremely sturdy, even against 20 joules impact, dust and water jets (IK10 and IP66 degree of protection), able to operate in a wide range of temperatures (25 up to 100°C), exceptionally resistant to UV and chemical agents and compliant with IEC 62208 and UL 508A standards.

Adaptable to customers' requirements

Available in 6 sizes and with transparent or blind door, with full metal and plastic base plates. Gemini can be used even in very difficult application circumstances and extreme weather conditions.

The thermoplastic co-injection molding process

It's like a "sandwich" of two materials: a compact external covering and an expanded core.
This technology ensures the highest level of mechanical protection against impacts (IK10) .

Easy to install
Versatile and simple. To meet any application.

Offering the best technology for more reliable energy distribution solutions, by protecting people, equipments and resources.

ABB's Gemini enclosures provide a real system of integrated and complementary functions making them configurable into different applications: for automation, distribution and combined automation and distribution.

Gemini is designed to be perfectly compatible with ABB components for low voltage control and monitoring. In mixed applications, the Gemini enclosure is designed to be fitted with System pro M modular devices and Tmax XT moulded-case circuit breakers. To respect safety standards, all the enclosure components are easy to fit and can be fixed to the base plate or to the box frame without using any tools.
Wiring operations are carried out from the front followed by snapping the base plate or the distribution frame onto the box.
The patented frame is fitted with the cable duct incorporated in the uprights.

—

Gemini is also flexible thanks to six different box sizes and internal space to accommodate from 24 to 216 DIN modules.

For control and command applications, three typologies of base plates are available: standard metal, perforated metal and insulated.

Lightweight thermoplastic material makes handling operation easier compared to traditional enclosure, for easier handling.

- Few parts: **snap-on fixing**, **no tools needed**
- **Pre-assembled hinges**
- Door with **180 degree rotation**
- Frame with **integrated vertical wiring duct**
- Frontal cabling: **comfort in the wiring process**
- **A wide range of accessories for automation and distribution applications**

—
01 Gemini doors open at an angle of more than 180° giving easy access to the devices installed inside the switchboard.

—
02 No tools are needed for installation. The doors hook onto the hinges with special hinge pins and are reversible.

—
03 The frame can be extracted to make wiring operations easier at the workbench.

—
04 The fixing hooks supplied in the standard versions are applied without having to use tools.

—
05 Fixing hooks and feet allow the frame to be snap-mounted inside the box.

—
01

—
02

—
03

—
04

—
05

High degree of protection
Designed to operate in harsh environments

Gemini is developed and designed by ABB together with the direct collaboration of panel builders, installers and designers in order to create insulating enclosures to better face extreme weather conditions.

Gemini represents the best solution for both distribution and automation (control and command) applications.

For a valid enclosure, the degree of protection is an important factor. Gemini thermoplastic enclosures are totally protected against the infiltration of solid bodies thanks to an IP66 degree of protection (IP30 with the door open and with the appropriate components installed) and a double insulation, even in the event of indirect contact.

—

They are suitable for environments with extreme temperatures, in outdoor applications and severe conditions.

Thermoplastic material retains its characteristics for a long time since it's not subject to corrosion from chemical and atmospheric agents such as dust and sand. In Mining or Construction applications as well as manufacturing plants, Gemini withstands harsh chemicals with high levels of performance.

Typical examples of some Gemini applications can be seen in Manufacturing sites, Solar power plants, greenhouses, chemical plants and in any other environments where distribution and automation demand specific safety requirements and service continuity.

It is particularly recommended in photovoltaic and greenhouse applications, also because of its strong resistance to UV rays.

- **IP66 degree of protection** (IP30 with the door open and with the appropriate components installed)
- **Double insulation from dust and water jets**, even in the event of indirect contact
- Adaptation to environments with extremely high or low temperatures **(-25°C to 100°C)**, in outdoor applications and in severe conditions
- **Resistance to aggressive chemical agents and UV radiation**
- Resistance to fire and abnormal heat **(GWT up to 750°C)**.
- Insulation Voltage: **1000 Vac; 1500 Vdc**
- UL Type **1, 3R, 4, 4X, 12**

Additional tests completed
- Dust/sand resistance (factory internal tested)
- Saline environments (according to IEC 60068-2-52)
- Weathering (according to IEC 60068-2-5)
- Permanent sun exposure (IEC 60068-2-5)

Photovoltaic

In a typical photovoltaic plant the direct current section comprises a generator consisting of strings composed of photovoltaic modules connected in series. The Gemini series of IP66 enclosures are ideal for use as field combiners or as parallel switchboards, i.e. for outdoor installation near the modules. ABB has a range which is currently unique on the market, and has developed a family of plug & operate solutions, i.e. a series of finished, wired and certified switchboards to meet the needs of a huge range of plant types: from single string for residential applications to large-scale solar fields (for more information see specific documentation on abb.com).

Adaptable to customers' requirements
Widest range and numerous accessories for a complete solution

With Gemini, you can benefit from a wide range of enclosures with different dimensions and the possibility to arrange the devices into the DIN-Rail as you need. Moreover, Gemini enclosures have a wide range of accessories for both automation and distribution applications, ensuring maximum versatility and integration.

Accessories

- Various locking systems can be installed (triangular, squared, with handles and ciphered type
- Ventilation and anti-condensation kits: protecting devices from the effects of heat and humidity
- Wall brackets, pole mounting kit and
- pedestal make it easier to install the enclosures in any context.
- Kit for installing Tmax XT circuit-breakers
- The universal drill bit can be used to create the holes to install the cable glands for cable derivations.

—
01

—
02

—
03

—
04

—
01 Wall-mounted installation is possible using the special mounting brackets.

—
02 ABB logo with its minimal graphic design fits well to hinged doors .

—
03 Pole-mounted or mounted on a special pedestal installation is also possible.

—
04 The standard double-bit locks supplied can be replaced by the version with ciphered key and handle or with square or triangular impression.

General purpose enclosures

Basic configuration - Gemini switchboards

In the basic configuration, Gemini switchboards are composed of boxes in six different sizes ranging from 335x400x210 mm to 840x1005x360 mm (WxHxD, external measurements) and with opaque or transparent doors. In both versions, the doors are reversible and clip onto the hinges without the need to use tools; the fact that they open at an angle of more than 180° means that it is easy to work on the components installed inside the switchboard.
The seal applied by extrusion along the sides of the doors guarantees IP66 degree of protection. Access to the inside of the switchboard is protected by a standard double bit lock that can be replaced by locks of another type available in the accessories. Boxes and doors can be requested either separately or as combined “box + door” codes, to make filling out the order form more flexible. Inside the packages, the door is always wrapped separately and inserted inside a pocket that protects it from accidental damage until wiring is completed and the switchboard is installed.
Hole-cover plugs to guarantee IP protection and double insulation for wall mounting are also supplied with the pack together with the instruction sheet.

Specifications	
Protection	IP66 (IEC EN 60529) Class II insulation
Strength	Thermoplastic material moulded in co-injection Resistance to abnormal heat and fire up to a temperature of 750 °C (IEC EN 60695-2-11) IK10 (IEC EN 50102) degree of resistance to impacts Protection against chemical and atmospheric agents (water, saline solutions, acids, basic agents, mineral oils, UV rays) Operating temperature -25 °C ÷ +100 °C
Performances	Rated service voltage up to 1000 V Rated insulating DC voltage up to 1000 V Rated insulating AC voltage up to 1500 V
Flexibility of use	6 sizes from 335x400x210 mm to 840x1005x360 mm (WxHxD, external dimensions) DIN 24 to 216 modules
Installation	Snap-on mounting of all components in compliance with safety Standards
Quality and environment	Compliance with CEI EN 62208 international reference Standard, qualification for the requirements of CEI EN 61439-1 Standard, IMQ mark according to EN 62208 Standard. 100% recyclable EN 60068-2-52 resistance to marine environments EN60068-2-5 resistance direct sun exposure UL Listed: UL508A, UL50, UL50E Nema: Types 1, 3R, 4, 4X, 12

Gemini doors open at an angle of more than 180° giving easy access to the devices installed inside the switchboard.

No tools are needed for installation. The doors hook onto the hinges with special hinge pins and are reversible.

The special structure of the inner perimeter of the box ensures further protection against the penetration of water. The box is supplied with a spirit level.

General purpose enclosures

Basic configuration - Gemini switchboards



Transparent door switchboard



Opaque door switchboard

Boxes and doors

- Available in 6 sizes
- Single order code combined with box and transparent and opaque door
- Pack with door dismounted and wrapped separately
- Door designed so that it can be hooked onto hinges at both vertical sides and mounted without the use of tools
- To be mounted to the wall using internal holes or fixing brackets supplied as accessories
- Door opening at an angle of more than 180°
- RAL 7035 grey color
- Doors supplied with 2 standard double bit locks (3 for sizes 5 and 6) that can be replaced with locks for ciphered key or with square/triangular impression (the standard triplex key is suitable for use with three types of impressions).

Transparent door

Size	External		Modules		Code	Unit/Pack
	Dimensions WxHxD (mm)	Internal WxHxD (mm)	Max No. DIN mod.	No. vertical mod. (H=150 mm)		
1	335x400x210	250x300x180	24 (12x2)	2	1SL0211A00	1/1
2	460x550x260	375x450x230	54 (18x3)	3	1SL0212A00	1/1
3	460x700x260	375x600x230	72 (18x4)	4	1SL0213A00	1/1
4	590x700x260	500x600x230	96 (24x4)	4	1SL0214A00	1/1
5	590x855x360	500x750x330	120 (24x5)	5	1SL0215A00	1/1
6	840x1005x360	750x900x330	216 (36x6)	6	1SL0216A00	1/1

Opaque door

Size	External		Modules		Code	Unit/Pack
	Dimensions WxHxD (mm)	Internal WxHxD (mm)	Max No. DIN mod.	No. vertical mod. (H=150 mm)		
1	335x400x210	250x300x180	24 (12x2)	2	1SL0201A00	1/1
2	460x550x260	375x450x230	54 (18x3)	3	1SL0202A00	1/1
3	460x700x260	375x600x230	72 (18x4)	4	1SL0203A00	1/1
4	590x700x260	500x600x230	96 (24x4)	4	1SL0204A00	1/1
5	590x855x360	500x750x330	120 (24x5)	5	1SL0205A00	1/1
6	840x1005x360	750x900x330	216 (36x6)	6	1SL0206A00	1/1

General purpose enclosures

Basic configuration - Gemini switchboards



Single box

Transparent door

Opaque door

Single boxes

Size	External dimensions WxHxD (mm)	Internal WxHxD (mm)	Code	Unit/Pack
1	335x400x210	250x300x180	1SL0221A00	1/1
2	460x550x260	375x450x230	1SL0222A00	1/1
3	460x700x260	375x600x230	1SL0223A00	1/1
4	590x700x260	500x600x230	1SL0224A00	1/1
5	590x855x360	500x750x330	1SL0225A00	1/1
6	840x1005x360	750x900x330	1SL0226A00	1/1

Single doors

Transparent door

Size	Box dimensions WxHxD (mm)	Code	Unit/Pack
1	335x400x210	1SL0241A00	1/1
2	460x550x260	1SL0242A00	1/1
3	460x700x260	1SL0243A00	1/1
4	590x700x260	1SL0244A00	1/1
5	590x855x360	1SL0245A00	1/1
6	840x1005x360	1SL0246A00	1/1

Opaque door

Size	Box dimensions WxHxD (mm)	Code	Unit/Pack
1	335x400x210	1SL0231A00	1/1
2	460x550x260	1SL0232A00	1/1
3	460x700x260	1SL0233A00	1/1
4	590x700x260	1SL0234A00	1/1
5	590x855x360	1SL0235A00	1/1
6	840x1005x360	1SL0236A00	1/1

General purpose enclosures

Components for automation applications

Gemini switchboards are designed to be perfectly compatible with ABB components for low voltage control and monitoring. For these applications they can be equipped with modular devices belonging to the System pro M range, with Tmax moulded-case circuit-breakers and control and signaling devices, creating a truly integrated automation system. When deciding the Gemini layout for control and monitoring applications, not only is it possible to select the box and door in the required size, but you can also select the base plate in one of the three versions in the range.

After wiring with the ducts and the Fix-O-Rapid device, the special standard adjustable feet and hooks must be fitted onto the base plate, allowing it to be inserted inside the box at up to seven different depths and three further levels of adjustment: no tools need to be used to carry out these operations. To finish the job, the inner door can be mounted (reversible and in insulating material), guaranteeing IP30 degree of protection when the switchboard door is open. No tools are needed unless the inner door is equipped with buttons, warning lights, etc.

The fixing hooks and feet supplied in the standard versions are applied without having to use tools, making it possible to install the base plate at seven different depths inside the switchboard. They can also be adjusted at three further positions.

Application of the inner door guarantees IP30 degree of protection when the switchboard door is open.

Example of the configuration of a switchboard for an automation application: some ABB control and protection devices are installed on the plate. The inner door is fitted with light-signaling devices.

General purpose enclosures

Components for automation applications



Blank metal base plate



Drilled metal base plate



Insulating material base plate

Base plates

- Available in three versions in blank or drilled metal and insulating material
- Positioning at 3 different depths for size 1, 4 different depths for sizes 2-3-4 and 7 different depths for sizes 5-6 (adjustments with 30 mm pitch)
- Supplied with feet and hooks adjustable at three further positions (with 7.5 mm pitch)
- Snap-on mounting
- Plates can also be mounted directly on the base with the special kit.

Blank metal

Size of the switchboard	Code	Unit/Pack
1	1SL0259A00	1/6
2	1SL0260A00	1/6
3	1SL0261A00	1/4
4	1SL0262A00	1/4
5	1SL0263A00	1/4
6	1SL0264A00	1/2

Drilled metal

Size of the switchboard	Code	Unit/Pack
1	1SL0275A00	1/6
2	1SL0276A00	1/6
3	1SL0277A00	1/4
4	1SL0278A00	1/4
5	1SL0279A00	1/4
6	1SL0280A00	1/2

Insulating material

Size of the switchboard	Code	Unit/Pack
1	1SL0267A00	1/6
2	1SL0268A00	1/6
3	1SL0269A00	1/4
4	1SL0270A00	1/4
5	1SL0271A00	1/4
6	1SL0272A00	1/2

Description	Code	Unit/Pack
Base mounting kit for metal plate	1SL0383A00	1/10

General purpose enclosures

Components for automation applications



Inner door, sizes 1-2



Inner door, sizes 3-4-5-6

Inner doors

- Made in insulating material
- IP30 degree of protection with door open
- Designed so that door can be hinged onto both vertical sides
- Snap-on mounting and fixing

Size of the switchboard	Code	Unit/Pack
1	1SL0251A00	1/4
2	1SL0252A00	1/4
3	1SL0253A00	1/2
4	1SL0254A00	1/2
5	1SL0255A00	1/2
6	1SL0256A00	1/1

General purpose enclosures

Components for automation applications



Wiring duct with 8/12 mm slot

Wiring ducts

- Made in self-extinguishing thermoplastic material (UL 94 V0), resistant to abnormal heat and fire up to 960 °C (IEC 695-2-1)
- RAL 7030 grey color
- Available in version with 8/12 mm and 4/6 mm slots
- Base strip designed to snap onto Fix-O-Rapid
- Available in standard lengths of 2 m

With 8/12 mm slots

Dimensions WxH (mm)	Code	Weight (kg/m)	Unit/ Pack- meters
15x17	05 019	0,06	46
25x30	05 033	0,21	58
25x40	05 043	0,25	48
25x60	05 063	0,24	34
25x80	05 083	0,29	28
25x100	05 094	0,46	20
40x30	05 035	0,27	40
40x40	05 045	0,31	30
40x60	05 065	0,34	22
40x80	05 085	0,38	36
40x100	05 095	0,53	28
60x30	05 037	0,38	52
60x40	05 047	0,46	40
60x60	05 067	0,47	32
60x80	05 087	0,50	24
60x100	05 096	0,73	20
80x40	05 049	0,47	32
80x60	05 069	0,52	24
80x80	05 089	0,59	16
80x100	05 097	0,91	14
100x40	05 051	0,55	24
100x60	05 071	0,59	20
100x80	05 091	0,68	16
100x100	05 098	1,06	8
120x40	05 053	0,65	20
120x60	05 073	0,73	14
120x80	05 093	0,89	12
150x100	05 099	1,37	8

General purpose enclosures

Components for automation applications



Wiring duct with 4/6 mm slot

With 4/6 mm slots

Dimensions WxH (mm)	Code	Weight (kg/m)	Unit/ Pack-meters
15x17	05 119	0,06	46
25x30	05 133	0,21	58
25x40	05 143	0,25	48
25x60	05 163	0,24	34
25x80	05 183	0,29	28
25x100	05 194	0,46	20
40x30	05 135	0,27	40
40x40	05 145	0,31	30
40x60	05 165	0,34	22
40x80	05 185	0,38	36
40x100	05 195	0,53	28
60x30	05 137	0,38	52
60x40	05 147	0,46	40
60x60	05 167	0,47	32
60x80	05 187	0,50	24
60x100	05 196	0,73	20
80x40	05 149	0,47	32
80x60	05 169	0,52	24
80x80	05 189	0,59	16
80x100	05 197	0,91	14
100x40	05 151	0,55	24
100x60	05 171	0,59	20
100x80	05 191	0,68	16
100x100	05 198	1,06	8
120x40	05 153	0,65	20
120x60	05 173	0,73	14
120x80	05 193	0,89	12
150x100	05 199	1,37	8

Fix-O-Rapid

Rapid mounting device for attaching wiring ducts to the base plate: it snaps onto the plate after drilling a ø 7 mm hole. Two Fix-O-Rapid devices are enough for each wiring duct section. Fix-O-Rapid guarantees maximum insulation since it does not involve the use of any metal component inside the wiring duct. If the wrong wiring duct is selected, it can be dismounted and a version with the same base and a different height can be attached to the Fix-O-Rapid.

Description	Code	Unit/ Pack-no. pieces
Rapid mounting device for wiring duct, W 25 mm	05 270	20/600
Rapid mounting device for wiring duct, W 40 mm	05 272	20/600
Rapid mounting device for wiring duct, W 60 mm	05 274	20/600
Rapid mounting device for wiring duct, W 80 mm	05 276	20/240
Rapid mounting device for wiring duct, W 100 mm	05 278	20/240
Rapid mounting device for wiring duct, W 120 mm	05 280	20/240
Rapid mounting device for wiring duct, W 150 mm	05 282	20/240



Fix-O-Rapid

General purpose enclosures

Components for distribution and mixed applications

In distribution and mixed applications, the Gemini switchboard is designed to be fitted with System pro M modular devices and Tmax moulded-case circuit breakers. The frame is the load-bearing element of the configuration: DIN rails, partial modular plates and the special Tmax mounting and cabling kits are snapped onto the uprights.
All the components can be adjusted to six different depths with a pitch of 12.5 mm and arranged at heights with standard installation pitch of 150, 225 and 300 mm and a distance of 75 mm between the rows.

Blank or drilled front panels are applied to protect the equipment and these can be hinged onto both sides; the cables are housed inside the vertical wiring duct integrated in the uprights according to an exclusive ABB patent. Wiring is carried out by pulling out the frame and working from the front; the ergonomic grip and the standard feet and snap-on hooks supplied make it easy to insert it inside the switchboard after the job is finished.

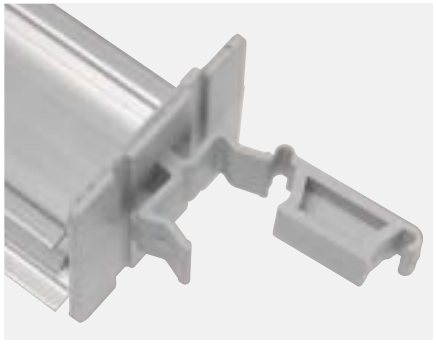

The DIN rail is supplied with special hooks already in position for attaching to the uprights.

The upright with the incorporated wiring duct is an exclusive ABB patent that rationalizes the path of cables inside the switchboard.

The depth at which the DIN rail, the modular plates, the kit for fixing the Tmax circuit breakers and the wiring duct are positioned can be adjusted with a simple sliding movement.

The frame can be extracted to make wiring operations easier at the workbench.

The blank and drilled panels are hinged onto both sides; the description of the installed components can be kept in the special compartment protected by a transparent, hinged flange.

Fixing hooks and feet allow the frame to be snap-mounted inside the box.

General purpose enclosures

Components for distribution and mixed applications

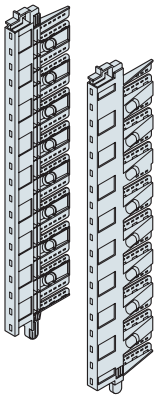

Uprights

Uprights

- Incorporated vertical wiring duct (ABB patent)
- Snap-on mounting of all components (installation pitch of 75 mm)
- Snap-on insertion into box
- Depth of installed components adjusted at a pitch of 12.5 mm (4 positions for uprights of size 1 and 6 positions for the remaining ones)
- Ergonomic grip to make it easy to insert and extract

Size of the switchboard	Code	Unit/Pack
1	1SL0283A00	1/4
2	1SL0284A00	1/4
3	1SL0285A00	1/4
4	1SL0285A00	1/4
5	1SL0286A00	1/2
6	1SL0287A00	1/1



DIN rail

DIN rails

- Two-sided version
- Supplied with mounting supports that snap onto uprights
- Depth adjustment on uprights
- Designed so that rapid Unifix L mounting bars can be snapped on

Size of the switchboard	Modules per row	Code	Unit/Pack
1	12	1SL0290A00	1/10
2	18	1SL0291A00	1/10
3	18	1SL0291A00	1/10
4	24	1SL0292A00	1/10
5	24	1SL0292A00	1/10
6	36	1SL0293A00	1/10

General purpose enclosures

Components for distribution and mixed applications



Drilled panel, 1 module



Drilled panel, 1 + 1/2 module

Drilled panels

- Supplied with DIN rail complete with supports to snap onto uprights and adjustable in depth
- Available in 1 module (H 150 mm) and 1+1/2 module (H 225 mm, sizes 2-6) dimensions
- Designed to be hinged onto both vertical sides
- Snap-on mounting onto uprights (in compliance with reference Standards a tool must be used for removing the panel)
- Document pocket for storing descriptions of installed devices

1 module

Size of the switchboard	Code	Unit/Pack
1	1SL0307A00	1/8
2	1SL0308A00	1/8
3	1SL0308A00	1/8
4	1SL0309A00	1/4
5	1SL0309A00	1/4
6	1SL0310A00	1/2

1 + 1/2 module

Size of the switchboard	Code	Unit/Pack
2	1SL0313A00	1/8
3	1SL0313A00	1/8
4	1SL0314A00	1/4
5	1SL0314A00	1/4
6	1SL0315A00	1/2

General purpose enclosures

Components for distribution and mixed applications



Blank panel, 1/2 module



Blank panel, 1 module



Blank panel, 2 modules

Blank panels

- Available in 1/2 module (H 75 mm), 1 module (H 150 mm) and 2 modules (H 300 mm) dimensions
- H 150 mm and H 300 panels designed to be hinged onto both vertical sides
- Snap-on mounting onto uprights (in compliance with reference Standards a tool must be used for removing the panel)

1/2 module

Size of the switchboard	Code	Unit/Pack
1	1SL0318A00	1/10
2	1SL0319A00	1/10
3	1SL0319A00	1/10
4	1SL0320A00	1/6
5	1SL0320A00	1/6
6	1SL0321A00	1/4

1 module

Size of the switchboard	Code	Unit/Pack
1	1SL0324A00	1/8
2	1SL0325A00	1/8
3	1SL0325A00	1/8
4	1SL0326A00	1/4
5	1SL0326A00	1/4
6	1SL0327A00	1/4

2 modules

Size of the switchboard	Code	Unit/Pack
1	1SL0330A00	1/6
2	1SL0331A00	1/6
3	1SL0331A00	1/6
4	1SL0332A00	1/4
5	1SL0332A00	1/4
6	1SL0333A00	1/4

General purpose enclosures

Components for distribution and mixed applications



Partial modular plate, 1 module



Partial modular plate, 2 modules

Partial modular plates

- Available in 1 module (H 150 mm) and 2 module (H 300 mm, sizes 2-6) dimensions
- Snap-on mounting onto uprights with depth adjustment.

1 module

Size of the switchboard	Code	Unit/Pack
1	1SL0296A00	1/6
2	1SL0297A00	1/4
3	1SL0297A00	1/4
4	1SL0298A00	1/4
5	1SL0298A00	1/4
6	1SL0299A00	1/2

2 modules

Size of the switchboard	Code	Unit/Pack
2	1SL0302A00	1/4
3	1SL0302A00	1/4
4	1SL0303A00	1/4
5	1SL0303A00	1/4
6	1SL0304A00	1/2

General purpose enclosures

Components for distribution and mixed applications



H 150 mm



H 300 mm

Kit for installing Tmax XT moulded-case circuit breakers

- For installing Tmax XT moulded-case circuit breakers in fixed version with front terminals
- Composed of a plate with special drilled holes and a protection panel with vertical slots that can be hinged on both sides and snap-on mounted (in compliance with reference Standards a tool must be used for removing the panel)
- Available for sizes 2-6
- Snap-on mounting onto uprights with the possibility of adjusting the plate depth

H 150 mm

Size of the switchboard	Code	Unit/Pack
2	1SL0373A00	1/4
3	1SL0373A00	1/4
4	1SL0374A00	1/4
5	1SL0374A00	1/4
6	1SL0375A00	1/2

H 300 mm

Size of the switchboard	Code	Unit/Pack
2	1SL0376A00	1/4
3	1SL0376A00	1/4
4	1SL0377A00	1/4
5	1SL0377A00	1/4
6	1SL0378A00	1/2

General purpose enclosures

Components for distribution and mixed applications

Kit selection

Size	Installation	XT1				XT2				XT3				XT4			
		3p	4p	3p D	4p D	3p	4p	3p D	4p D	3p	4p	3p D	4p D	3p	4p	3p D	4p D
1	D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	O1	■	■	■	■	■	■	■	■	■	■			■	■		
	T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
2	D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	K1	■	■	■													
	K2		■	■	■					■	■	■	■				
	O1	■	■	■	■	■	■	■	■	■	■	■		■	■	■	■
	O2	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
3	D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	K1	■	■	■													
	K2		■	■	■					■	■	■	■				
	O1	■	■	■	■	■	■	■	■	■	■	■		■	■	■	
	O2	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
4	D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	K1	■	■	■													
	K2		■	■	■					■	■	■	■				
	O1	■	■	■	■	■	■	■	■	■	■	■		■	■	■	■
	O2	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
5	D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	K1	■	■	■													
	K2		■	■	■					■	■	■	■				
	O1	■	■	■	■	■	■	■	■	■	■	■		■	■	■	
	O2	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
6	D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	K1	■	■	■													
	K2		■	■	■					■	■	■	■				
	O1	■	■	■	■	■	■	■	■	■	■	■		■	■	■	■
	O2	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	T	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

Caption
- D, installation on DIN rail
- K1, installation with Tmax kit H = 150 (holes made)
- K2, installation with Tmax kit H = 300 (holes made)
- O1, installation on modular plate (1 module, H = 150 mm)
- O2, installation on modular plate (2 modules, H = 300 mm)
- T, installation on total base plate

General purpose enclosures

Components for distribution and mixed applications





Wiring kit

Wiring kits

- omposed of wiring duct in versions 25x60 mm and 40x60 mm (WxH, 8-12 mm slots) and Fix-O-Rapid
- Snap-on mounting on uprights with depth adjustment

Wiring duct 25x60 mm

Size of the switchboard	Code	Unit/Pack
1	1SL0353A00	1/4
2	1SL0354A00	1/4
3	1SL0354A00	1/4
4	1SL0355A00	1/4
5	1SL0355A00	1/4
6	1SL0356A00	1/4

Wiring duct 40x60 mm

Size of the switchboard	Code	Unit/Pack
1	1SL0360A00	1/4
2	1SL0361A00	1/4
3	1SL0361A00	1/4
4	1SL0362A00	1/4
5	1SL0362A00	1/4
6	1SL0363A00	1/4

General purpose enclosures
Accessories

Gemini switchboards have the same accessories for both automation and distribution applications, ensuring maximum versatility and integration of functions. In particular, the ventilation and anti-condensation kits make it even safer for the devices to run, protecting them from the effects of heat and humidity while the wall brackets, pole mounting kit and pedestal make it easier to install the switchboards in any context.

Three different kinds of locks are supplied for the doors with which it is possible to replace the standard double bit model. The universal drill bit can be used to open the side branch connections. Module covers hide the unused modules of the DIN rail guaranteeing IP40 protection when the door is open in distribution and mixed configurations.

The standard locks supplied can be replaced by the version with ciphered key and handle or with square or triangular impression.

Gemini wall-mounted installation using the special mounting brackets.

The fact that Gemini switchboards can also be pole-mounted (see photo above) or mounted on a special pedestal (see photo at the side) makes them suitable for any application situation.

General purpose enclosures
Accessories



Locks

Locks
Available in three versions with ciphered key and handle, with triangular and square impressions.

Description	Code	Unit/Pack
Lock with Yale type ciphered key and handle	1SL0340A00	1/10
Lock with triangular impression	1SL0341A00	1/10
Lock with square impression	1SL0339A00	1/10
Tamper-proof locking kit (code 1SLO340A00 included)	1SL0458A00	1/10
Gemini standard lock	1SL0459A00	1/10

Locks for doors with handle

Description	Code	Unit/Pack
Yale Lock for door with handle	1SLM006600A0459	1/5
Ronis 455 lock for door with handle	1SLM006600A0460	1/5



Plastic wall brackets



Stainless steel wall brackets

Mounting elements
Guarantee optimum wall, pole and floor mounting conditions.

Description	Code	Unit/Pack
Horizontal and vertical plastic wall brackets (4 pieces)*	1SL0342A00	1/10
Horizontal and vertical plastic wall brackets UL listed (4 pieces)	1SLM006600A0342	1/10
Horizontal and vertical stainless steel wall brackets (4 pieces)	1SL0401A00	1/10
Pole mounting kit for sizes 1 switchboards**	1SL0343A00	1/4
Pole mounting kit for sizes 2-3 switchboards**	1SL0344A00	1/4
Pole mounting kit for sizes 4-5 switchboards**	1SL0345A00	1/2
Pole mounting kit for size 6 switchboards**	1SL0346A00	1/2
IP43 Floor mounting pedestal for sizes 1-4	1SL0352A00	1/1

* There are two types of inserts for adapting brackets to ø 6 e 8 mm fixing devices.
** The kit includes two elements for fixing the upper and the lower part of the switchboard.



Pole mounting kit



Floor mounting pedestal



Pedestal

Pedestals
Allows the application of the Gemini switchboard to the ground without the need to prepare the construction of concrete footings or foundations when the pedestal is buried.

Description	Code	Unit/Pack
Pedestal Gemini size 4	1SL0464A00	1/1
Pedestal Gemini size 5	1SL0465A00	1/1
Pedestal Gemini size 6	1SL0466A00	1/1

General purpose enclosures

Accessories



Ventilation kit

IP21/54 ventilation kits

- Composed of plastic grills and filter to ensure switchboard ventilation.
- Degree of protection without filter: IP21.
- Degree of protection with filter: IP54.
- Preassembled seal.

Description	Dimensions (mm)	Code	Unit/Pack
Grid + air flow kit	105x105	EN0105K	1/1
Grid + air flow kit (not suitable for size. 1)	150x150	EN0150K	1/1
Grid + air flow kit (not suitable for size. 1)	204x204	EN0204K	1/1

Note: screws not included; use 4 self lock screws 2,9x13 or ask for order code 1SL0384A00.



Base cover

Base covers

For aesthetic as well as functional purposes, in particular for pedestal installations.

Size of the switchboard	Code	Unit/Pack
1	1SL0385A00	1/4
2	1SL0386A00	1/4
3	1SL0387A00	1/2
4	1SL0388A00	1/2
5	1SL0389A00	1/2
6	1SL0390A00	1/2



Coupling kit

Coupling kits

It follows the aesthetic outline of the boxes.

Description	Code	Unit/Pack
Vertical coupling kit for sizes 2-3 switchboards	1SL0413A00	1/2
Vertical coupling kit for sizes 4 switchboards	1SL0414A00	1/2
Vertical coupling kit for sizes 5 switchboards	1SL0415A00	1/2
Vertical coupling kit for sizes 6 switchboards	1SL0416A00	1/2

General purpose enclosures
Accessories



Bottom base

Bottom bases H 30
For fixing the Gemini switchboard directly to the floor.

Description	Code	Unit/Pack
Bottom base for size 2-3 switchboards	1SL0423A00	1/2
Bottom base for size 4 switchboards	1SL0424A00	1/2
Bottom base for size 5 switchboards	1SL0425A00	1/2
Bottom base for size 6 switchboards	1SL0426A00	1/2



Fixed frame

Fixed frames
- In combination with bottom base H 30
- For fixing onto poured concrete floors and bases.

Description	Code	Unit/Pack
Fixed frame for size 2-3 switchboards	1SL0433A00	1/2
Fixed frame for size 4 switchboards	1SL0434A00	1/2
Fixed frame for size 5 switchboards	1SL0435A00	1/2
Fixed frame for size 6 switchboards	1SL0436A00	1/2



Integral cover

Integral covers

Description	Code	Unit/Pack
Integral cover for size 1 switchboard	1SL0451A00	1/1
INtegral cover for size 2-3 switchboard	1SL0452A00	1/1
Integral cover for size 4 switchboard	1SL0454A00	1/1
Integral cover for size 5switchboard	1SL0455A00	1/1
Integral cover for size 6 switchboard	1SL0456A00	1/1

General purpose enclosures
Accessories



Base socket

Anti-condensation kits

- Kit in special material to prevent condensation from forming inside the switchboard: it include GORE™ MEMBRANE VENTING
- Impermeable to water (pressure): 0.6 bar / 60 sec.
- Air flow: 400 ml/min. (dp = 70 mbar)
- 1 kit for sizes 1-2, 2 kits for sizes 3-4 and 3 kits for sizes 5-6 are recommended to guarantee adequate dissipation; in any case the number of kits to be installed depend on the number and type of devices installed inside the switchboard
- IP66

Description	Code	Unit/Pack
Anti-condensation kit	1SL0351A00	1/6

Other accessories



Universal drill bit



Module covers



Spacer

Description	Code	Unit/Pack
Universal drill bit	12894	1/30
Module covers in RAL 7035 grey, 4 modules	12863	25/300
Plastic spacer for installing modular devices and moulded-case circuit breakers at the same depth	12851	10/60
Small bag plate mounting kit	1SL0383A00	1/10
Small bag for ventilation kit	1SL0384A00	10/50

Temperature management
IP20 heater

Description	Dimensions (mm) H	W	D	Code	Package/ No. of pieces
Anti-condensation heater 30W, 110-240 Vac-dc	115	42	42	VA7930	1/1
Anti-condensation heater 50W, 110-240 Vac-dcc	165	42	42	VA7950	1/1
Anti-condensation heater 75W, 110-240 Vac-dc	210	42	42	VA7975	1/1
Anti-condensation heater 100W, 110-240 Vac-dc	165	42	51	VA7910	1/1
Anti-condensation heater 150W, 110-240 Vac-dc	146	82	51	VA7915	1/1
Anti-condensation heater with fan 300W, 230 Vac-dc	148	82	91	VA8300	1/1

For technical details, see page 50.

General purpose enclosures

Fast selection table

Basic configuration





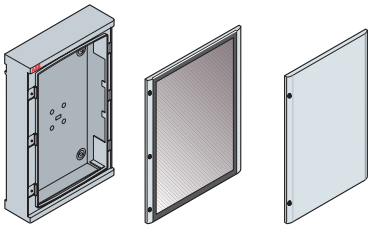

Size	No. of installable DIN modules	No. of vertical mod.	External dimensions			Internal dimensions			Complete switchboard		Box	Door	
	(mod. x row)	(H=150 mm)	A	B	C	D	E	F	Trasparent door	Opaque door		Transparent	Opaque
1	24 (12x2)	2	400	335	210	300	250	180	1SL0211A00	1SL0201A00	1SL0221A00	1SL0241A00	1SL0231A00
2	54 (18x3)	3	550	460	260	450	375	230	1SL0212A00	1SL0202A00	1SL0222A00	1SL0242A00	1SL0232A00
3	72 (18x4)	4	700	460	260	600	375	230	1SL0213A00	1SL0203A00	1SL0223A00	1SL0243A00	1SL0233A00
4	96 (24x4)	4	700	590	260	600	500	230	1SL0214A00	1SL0204A00	1SL0224A00	1SL0244A00	1SL0234A00
5	120 (24x5)	5	855	590	360	750	500	330	1SL0215A00	1SL0205A00	1SL0225A00	1SL0245A00	1SL0235A00
6	216 (36x6)	6	1005	840	360	900	750	330	1SL0216A00	1SL0206A00	1SL0226A00	1SL0246A00	1SL0236A00

Components for automation

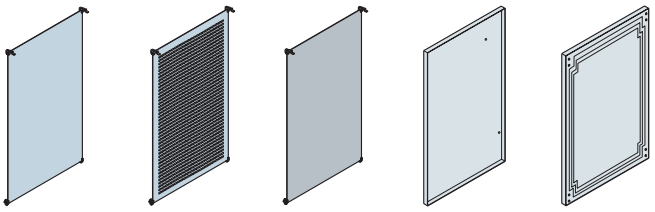

Size	Base plate			Inner door	
	Blank	Drilled	Insulating	Former version	New version
1	1SL0259A00	1SL0275A00	1SL0267A00	1SL0251A00	-
2	1SL0260A00	1SL0276A00	1SL0268A00	1SL0252A00	-
3	1SL0261A00	1SL0277A00	1SL0269A00	-	1SL0253A00
4	1SL0262A00	1SL0278A00	1SL0270A00	-	1SL0254A00
5	1SL0263A00	1SL0279A00	1SL0271A00	-	1SL0255A00
6	1SL0264A00	1SL0280A00	1SL0272A00	-	1SL0256A00



Accessories for distribution

Wiring ducts	Fix-O-Rapid
Check the ABB Library	

General purpose enclosures

Fast selection table

Components for automation






Size	Uprights	DIN rail	Drilled panel		Blank panel			Modular plate	
			H=150 mm	H=225 mm	H=75 mm	H=150mm	H=300 mm	H=150 mm	H=300 mm
1	1SL0283A00	1SL0290A00	1SL0307A00	-	1SL0318A00	1SL0324A00	1SL0330A00	1SL0296A00	-
2	1SL0284A00	1SL0291A00	1SL0308A00	1SL0313A00	1SL0319A00	1SL0325A00	1SL0331A00	1SL0297A00	1SL0302A00
3	1SL0285A00	1SL0291A00	1SL0308A00	1SL0313A00	1SL0319A00	1SL0325A00	1SL0331A00	1SL0297A00	1SL0302A00
4	1SL0285A00	1SL0292A00	1SL0309A00	1SL0314A00	1SL0320A00	1SL0326A00	1SL0332A00	1SL0298A00	1SL0303A00
5	1SL0286A00	1SL0292A00	1SL0309A00	1SL0314A00	1SL0320A00	1SL0326A00	1SL0332A00	1SL0298A00	1SL0303A00
6	1SL0287A00	1SL0293A00	1SL0310A00	1SL0315A00	1SL0321A00	1SL0327A00	1SL0333A00	1SL0299A00	1SL0304A00





Accessories for distribution

Size	Kit for Tmax XT		x-O-Rapid kit with wiring duct		Module covers RAL 7035
	H. 150 mm	H. 300 mm	25x60 mm	40x60 mm	
1	-	-	1SL0353A00	1SL0360A00	12863
2	1SL0373A00	1SL0376A00	1SL0354A00	1SL0361A00	
3	1SL0373A00	1SL0376A00	1SL0354A00	1SL0361A00	
4	1SL0374A00	1SL0377A00	1SL0355A00	1SL0362A00	
5	1SL0374A00	1SL0377A00	1SL0355A00	1SL0362A00	
6	1SL0375A00	1SL0378A00	1SL0356A00	1SL0363A00	

General purpose enclosures

Fast selection table

Accessories common to the whole range

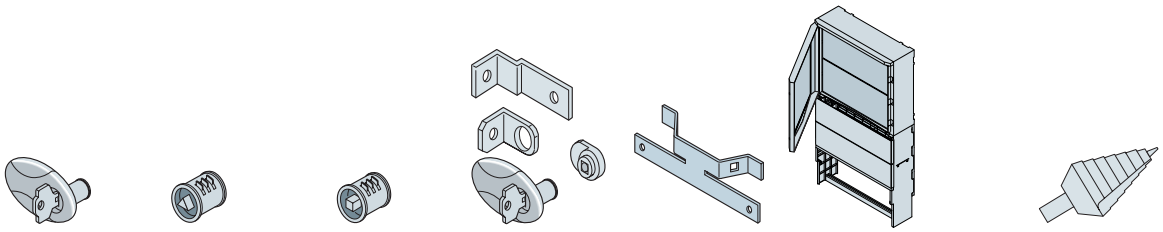

Size	Lock with handle	Lock with triangular impression	Lock with square impression	Anti tampering locking kit	Pole installation kit	Pedestal	Universal drill bit	Base mounting kit for metal and insulated plates
1	1SL0340A00	1SL0341A00	1SL0339A00	1SL0458A00	1SL0343A00	-	12894	1SL0383A00
2					1SL0344A00	-		
3					1SL0344A00	-		
4					1SL0345A00	1SL0464A00		
5					1SL0345A00	1SL0465A00		
6					1SL0346A00	1SL0466A00		

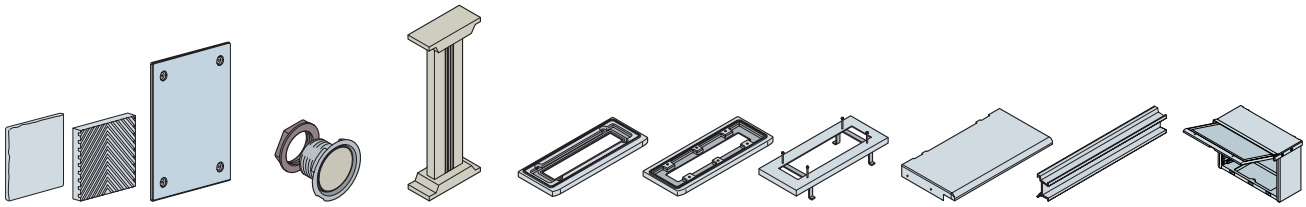

Size	Ventila-tion kit	Base cover	Anti condensa-tion kit	Floor pedestal	Coupling kit	Bottom base H 30	Fixed frame	Integral cover	Depth adapter	Horizon-tal kit
1	Check the ABB Library	1SL0385A00	1SL0351A00	1SL0352A00	-	-	-	1SL0451A00	12851	-
2		1SL0386A00			1SL0413A00	1SL0423A00	1SL0433A00	1SL0452A00		1SL0470A00
3		1SL0387A00			1SL0413A00	1SL0423A00	1SL0433A00	1SL0452A00		1SL0471A00
4		1SL0388A00			1SL0414A00	1SL0424A00	1SL0434A00	1SL0454A00		
5		1SL0389A00		-	1SL0415A00	1SL0425A00	1SL0435A00	1SL0455A00		1SL0472A00
6		1SL0390A00		-	1SL0416A00	1SL0426A00	1SL0436A00	1SL0456A00		

General purpose enclosures

Fast selection table

Accessories

Lock with handle	
Description	**Code**
Yale Lock for door with handle	1SLM006600A0459
Ronis 455 lock for door with handle	1SLM006600A0460

Mounting elements





Horizontal and vertical plastic wall brackets (4 pieces)*	Horizontal and vertical stainless steel wall brackets (4 pieces)
1SL0342A00	1SL0401A00

* There are two types of inserts for adapting brackets to ø 6 e 8 mm fixing devices.

General purpose enclosures

Configurations examples

The selection of components for the configuration of Gemini switchboards depends on the space available and the type of application. Two examples for each size are given below.



Size 1

Distribution	
Box + transparent door	1SL0211A00
Uprights	1SL0283A00
1-mod. drilled panel + DIN rail	1SL0307A00 (x2)



Automation	
Box + opaque door	1SL0201A00
Metal base plate	1SL0259A00
Inner door	1SL0251A00
Wall-mounting brackets	1SL0342A00



Size 2

Distribution/Mixed	
Box + transparent door	1SL0212A00
Uprights	1SL0284A00
Modular plate 1 mod.	1SL0297A00
Blank panel 1 mod.	1SL0325A00
Drilled panel 1+1/2 mod. + DIN rail	1SL0313A00
Blank panel 1/2 mod.	1SL0319A00
Module covers	12863



Automation	
Box + opaque door	1SL0202A00
Metal base plate	1SL0260A00
Inner door	1SL0252A00
Wiring duct	Check the ABB Library
Fix-O-Rapid	Check the ABB Library

General purpose enclosures

Configurations examples

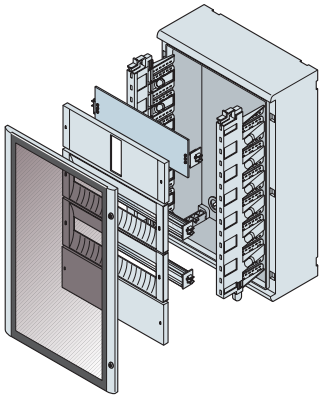

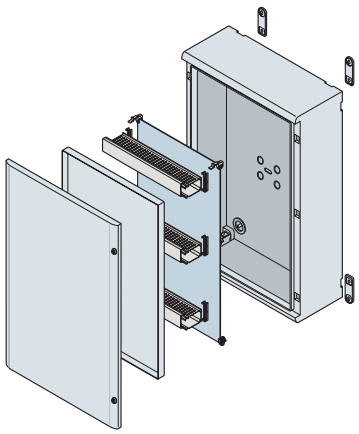

Size 3

Distribution/Mixed	
Box + transparent door	1SL0213A00
Uprights	1SL0285A00
Kit for Tmax	1SL0336A00
Drilled panel 1 mod. + DIN rail	1SL0308A00(x2)
DIN rail	1SL0291A00
Blank panel 1 mod.	1SL0325A00

Automation	
Box + opaque door	1SL0203A00
Base insulating plate	1SL0269A00
Inner door	1SL0253A00
Wiring duct	Check the ABB Library
Fix-O-Rapid	Check the ABB Library
Wall-mounting brackets	1SL0342A00

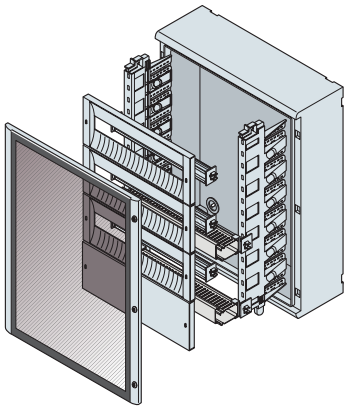

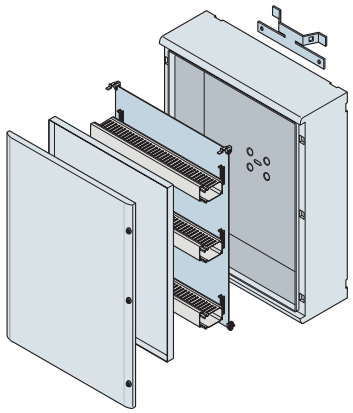

Taglia 4

Distribution/Mixed	
Box + transparent door	1SL0214A00
Uprights	1SL0285A00
Drilled panel 1 mod. + DIN rail	1SL0309A00 (x3)
Blank panel 1 mod.	1SL0326A00
Wiring kit 25x60 mm	1SL0355A00 (x2)
DIN rail	1SL0292A00
Module covers	12863

Automation	
Box + opaque door	1SL0204A00
Metal base plate	1SL0262A00
Inner door	1SL0254A00
Wiring duct	Check the ABB Library
Fix-O-Rapid	Check the ABB Library
Fixing on pole kit	1SL0345A00

General purpose enclosures

Configurations examples

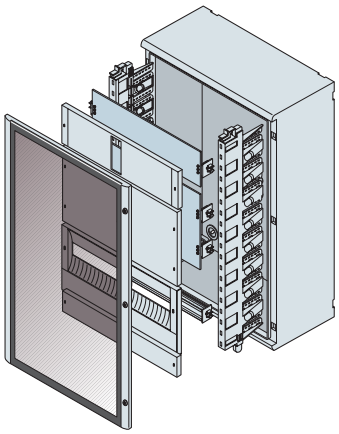

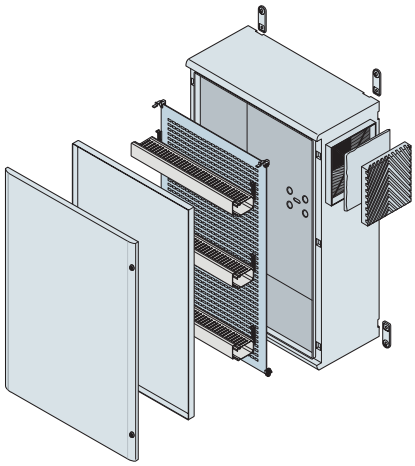

Size 5

Distribution/Mixed	
Box + transparent door	1SL0215A00
Uprights	1SL0286A00
Kit for Tmax	1SL0337A00
Modular plate 2 mod.	1SL0303A00
Blank panel 2 mod.	1SL0332A00
Drilled panel 1+1/2 mod.	1SL0314A00
Blank panel 1/2 mod.	1SL0320A00
Module covers	12863

Automation	
Box + opaque door	1SL0205A00
Drilled base plate	1SL0279A00
Inner door	1SL0255A00
Wiring duct	Check the ABB Library
Fix-O-Rapid	Check the ABB Library
Wall-mounting brackets	1SL0342A00
Ventilation kit	1SL0350A00

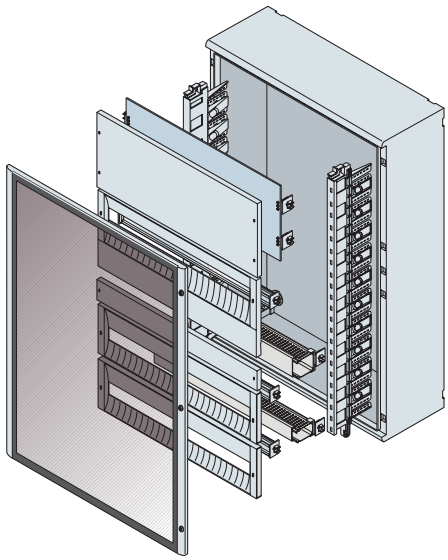

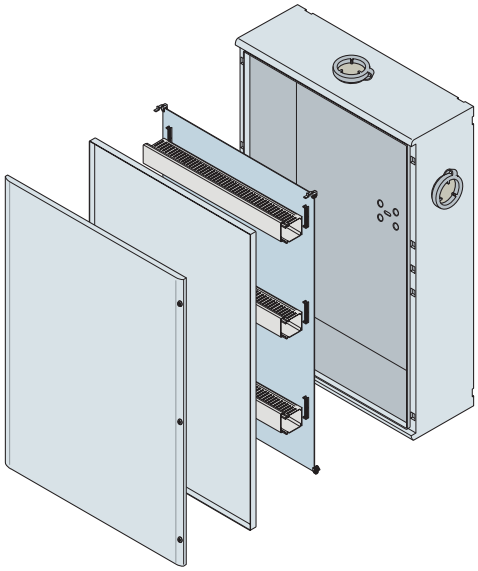

Size 6

Distribution/Mixed	
Box + transparent door	1SL0216A00
Uprights	1SL0287A00
Modular plate 2 mod.	1SL0304A00
Blank panel 2 mod.	1SL0333A00
Drilled panel 1+1/2 mod.	1SL0315A00
Blank panel 1/2 mod.	1SL0321A00
Drilled panel 1 mod.	1SL0310A00 (x2)
Wiring kit 25x60 mm	1SL0356A00
Wiring kit 40x60 mm	1SL0363A00

Automation	
Box + opaque door	1SL0206A00
Metal base plate	1SL0264A00
Inner door	1SL0256A00
Wiring duct	Check the ABB Library
Fix-O-Rapid	Check the ABB Library
Triangular lock	1SL0341A00 (x3)
Anti-condensation kit	1SL0351A00 (x3)

PEDESTALS

Electrical installation solutions for buildings
Pedestals

Index

EH - Cabinets for underground cable distribution and all types of outdoor industrial applications	2
EH1-4 - Overview insulated pedestals	3
EH1 - Small pedestal	4
EH2 - Column cabinets	5
EH3 - DIN size pedestals	8
EH3 - Accessories	13
Spare Parts for EH Pedestals	16
EH3 - System parts	18
EH3 / GD - DIN size pedestals deep version	22
EH3 / GD - Accessories	24
EH4 - Column cabinets	25

Pedestals

EH - Cabinets for underground cable distribution and all types of outdoor industrial applications

A wide range of pedestals has completed our comprehensive range of nonmetallic enclosures for several years. In power distribution application pedestals enable the connection of underground cables and the distribution to several consumers within the cabinets. Besides there are lots of applications that require reliable outdoor housings like Telecommunication or Traffic signalling.

Applications

- Energy distribution
- Cable television
- Telecommunication and electronics
- Traffic signalling and public lighting
- Temporary service for construction sites
- Camping sites and market places
- Marinas
- Water treatment
- Sub-stations
- 48 cm (19") racking systems

Standard: EN / IEC 61439-5

Specifications

- Cabinets to be mounted on a plinth.
- The base is partly buried into the ground.
- For some types the base is an integrated part of the pedestals.
- As with all our polyester boxes and cabinets, the pedestal feature high protection and total insulation to IEC 61439-5.
- Very high mechanical impact strength IK10 (EN/IEC 62262) and a high thermal insulation which results in reduced temperature variations within the enclosure.
- All cabinets are corrosion resistant and UV stabilised for outdoor applications.

Pedestals

EH1-4 - Overview insulated pedestals

EH1
IP43 / IP23

753x385x270

EH2
IP44


1097x433x240


1347x433x240


1622x433x240

1896x433x240

EH3 / F
IP44

875x455x320
(DIN 00)

875x590x320
(DIN 0)

875x785x320
(DIN 1)


875x1115x320
(DIN 2)


875x1445x320
(DIN 3)

EH3 / AP
IP44

875x455x320
(DIN 00)

875x590x320
(DIN 0)

875x785x320
(DIN 1)


875x1115x320
(DIN 2)

875x1445x320
(DIN 3)

1125x455x320
(DIN 00)

1125x590x320
(DIN 0)


1125x785x320
(DIN 1)


1125x1115x320
(DIN 2)

EH3 / AP (continued)
IP44


1125x1445x320
(DIN 3)


1310x785x320
(DIN 1)

1125 x 1115 x 320
(DIN 2)

EH3 / GD-AP
IP44

875x676x541 / 676

875x871x541 / 676

875x1200x541 / 676

1125x676x541 / 676


1125x871x541 / 676


1125x1200x541 / 676

EH4
IP43

1600x395x224


1600x495x224

1600x745x224

EH4-S
IP44

1420x320x234

1850x320x234

H x D x W (mm)

Pedestals

EH1 - Small pedestal

EH1C14VH

Applications
- Cable television
- Gas distribution
- Telecommunication (surface connections)
- Camping sides

Standard: EN / IEC 62208

Specifications
- Small outdoor enclosure with integrated base.
- Hood grey colour RAL 7035:
  - ventilated version in polyester or thermoplastic engineering polymer,
  - non ventilated version in hot moulded, glass fibre reinforced polyester,
  - blackened triangular zamac locking screws, vandalproof and for all seasons.
- - Degrees of protection:
  - IP23D for the non ventilated hoods,
  - IP20 for the ventilated hoods.
- IK09 protection rating against external mechanical impacts in accordance with EN/IEC 62262.
- Rated insulation voltage Ui 690V.
- Base in high density polyethylene (HDPE) RAL 9005.
- Base resists a ground temperature of -50°C.
- The upper part of the base serves as a mounting plate and is provided with three slots for fixation points.
- Moulded-in indication of burial depth.
- Option: 2432E lock.
- Easy to install by one person only (weight: 4.5 kg).
- Dimensions: 753×385×270 (H×W×D in mm).

EH1 - Column cabinet

Type	Type	Order code	Pack
(H x W x D) 753 x 385 x 270 mm			
Ventilated	EH1C14VHNA	4TBE841037C0100	1
Non-ventilated	EH1C14NH	4TBE841038C0100	1
Accessories			
8 mm triangular key	PS832027	4TBP832027C0100	1
Ventilated protective hood	EH1AEEV3	4TBE841039N0100	1
Non-ventilated protective hood	EH1AEEN4	4TBE841040N0100	1
Closure for older models	EH1AEEEI	4TBE841041N0100	1

Pedestals

EH2 - Column cabinets

EH2 - Distribution columns

Applications

- Energy distribution
- Cable television
- Traffic signage and public lighting
- Camp sites and marketplaces
- Gas stations
- Pump applications

Standard: EN / IEC 61439-5

Specifications

- The lower section has a polyester plate closure.
- RAL 7035 dyed in the mass gray color.
- IP44 protection rating in accordance with EN/IEC 60529.
- Total insulation ⧈.
- IK10 protection rating against external mechanical impacts in accordance with EN/IEC 62262.
- Corrosion-resistant.
- UV-stable for exterior installation, improved UV resistance thanks to its special coating.
- Resistant to temperatures of between -35°C and +80°C.
- Temporary temperature increases cause no damage.
- The semi-cylindrical locks are built in to an integral handle, protected by a plastic anti-vandal cover.
- The front section comprises removable cases.
- The mounting holes for receiving M6 threaded inserts located on the rear panel allow direct access for installing sets of busbars, frames or mounting plates.
- The rear and base are made from a single piece.
- The lower section of the column provides a stable mounting into the ground.
- The hinged hood has an opening angle of 90°, providing easy access.

Pedestals

EH2 - Column cabinets

		Type	EH2-NA	EH2-NB	EH2-NC	EH2-ND
		H x W x D	1097x433x240	1347x433x240	1622x433x240	1896x433x240
	Standard	**Type**	EH2C25CH	EH2C35CH	EH2C45CH	EH2C55CH
		Order code	4TBE842072C0100	4TBE842073C0100	4TBE842074C0100	4TBE842075N0100
	Mounting plate	H x W x D	200x395x5	450x395x5	700x395x5	700x395x5
	Pertinax with fixing bolts	**Type**	EH2M25EH	EH2M35EH	EH2M45EH	EH2M45EH
		Order code	4TBE842002C0100	4TBE842000C0100	4TBE842001C0100	4TBE842001C0100

EH2 - Accessories

Product	Type	Order code	Pack
Locks - profile half cylinder type			
	With 2 keys , V2432-E		
	EH3AEECI	4TBE843001C0100	1
	spare keys for EH3AEECI		
	PS832022	4TBP832022C0100	2
	With 1 square key, 8mm		
	EH3AEEQHN	4TBE843002C0100	1
	With an 8mm triangular key		
	EH3AEETHN	4TBE843003C0100	1
	With 2 keys A434		
	EH3UAECI	4TBE843248C0100	1
	Replacement keys upon request.		

Product	Type	Order code	Pack
Inserts			
	M6 x 11 threaded inserts		
	VJ890846	4TBO890846C0100	100
	Punch for inserting M6 threaded barrel		
	Support for cable release clamp (to be ordered separately)		
	APPL	4TBO852004C0100	1

Notes

Pedestals

EH3 - DIN size pedestals

Water and dust accumulation prevented by a sloped roof.

Fixation of bus bars with M8 hexagonal screws in the side wall, to maximize the width and space for electrical devices ①. Fixation of mounting plate with M8 press-in nuts in the back wall to maximize depth for electrical devices ②.

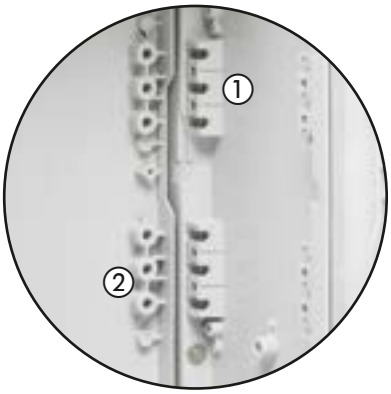

Convenient removal of bottom profile for easy access by tool less slider operation.

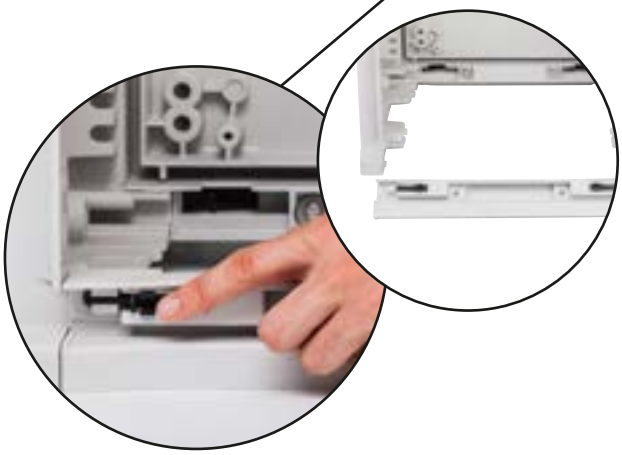

Easy fixation of side- /back- wall and roof by use of self tapping screws.

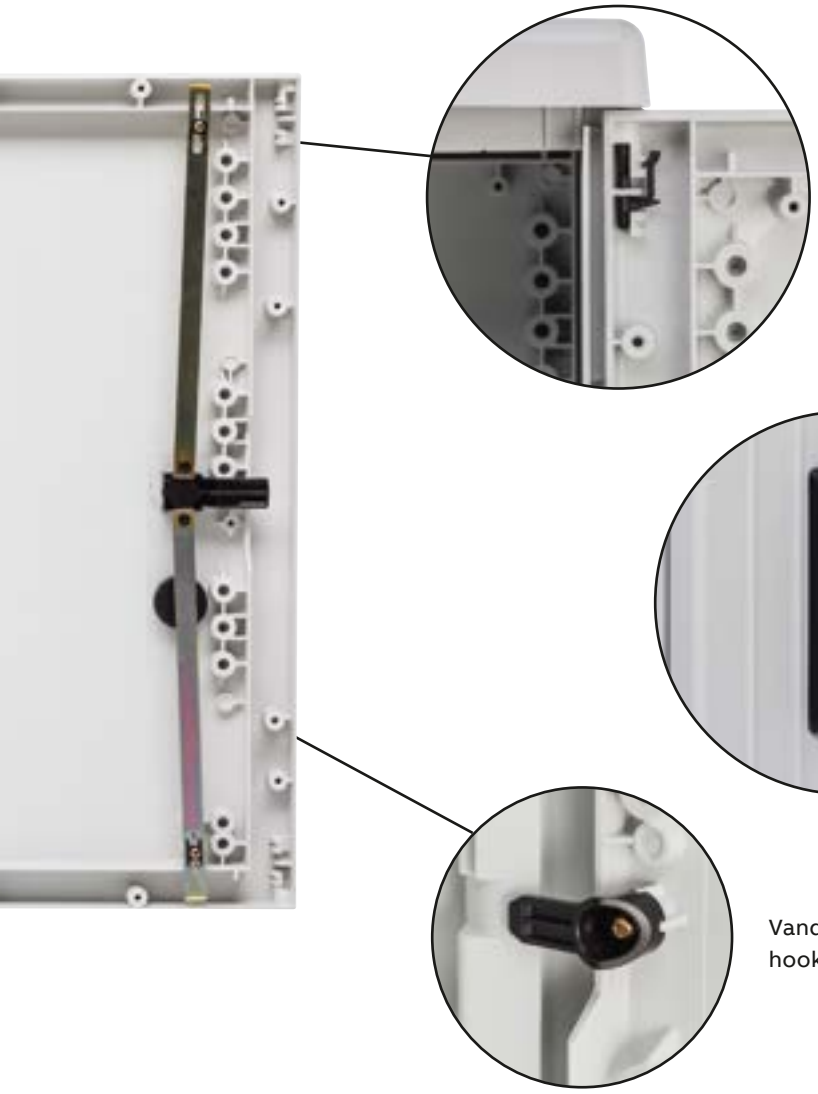

Quick and easy dis-assembly of door with captive hinge pins.

Swing handle for 45mm profile half cylinders with sealable cover.

Vandalism safe door.
hook on doors inner side.

Pedestals

EH3 - DIN size pedestals

EH3 - DIN size pedestals

Applications
- Energy distribution
- Gray water processing
- Cable television
- Solar energy applications
- Camp sites and marketplaces
- Traffic signage and public lighting

Standard: EN / IEC 61439-5

Specifications
- Cabinets made of hot moulded, glass fibre reinforced polyester.
- Dyed in mass RAL 7035 light grey.
- Delivered in kit-form or factory assembled.
- Protection degree IP44 according to EN 60529, IEC 60529.
- Total insulation.
- Protection degree IK10 against external impacts according to EN/IEC 62262.
- Corrosion resistant.
- UV stabilized for outdoor applications, coated cabinets for increased resistance and aesthetics against UV-corrosion available.
- Suitable for use in environments from -35° C to +80° C. Temporary exceeding temperatures will not be harmful.
- The open door can be manually unhinged to allow free access for maintenance. Door opening angle exceeds 180°.
- Studs are moulded in the rear panel which can receive M8 inserts to allow direct mounting at busbars, a frame or a mounting plare for components.
- Fixation points at the side panel are foreseen to mount busbars.
- Supplied with open bottom.
- To be mounted on a basement according to DIN 43629 standard dimensions between the fixation points.
- The rainhood shape prevents water stagnation on the roof.
- Removable bottom profile for easy cable access without tools.

EH3/F - flat surface pedestals
- 4 different widths; all sizes have the same height and depth.
- The swing handle is designed to receive a half profile cylindric lock.

EH3/AP - anti poster pedestals
- 5 widths with 2 different heights; all sizes have the same depth.
- 3-point closure system, exposed handle-actuated.
- The robust handle leaves more space inside the cabinet and is compatible with a profiled semi-cylindrical lock.
- The doors and rear panel are profiled, which prevents the affixing of posters.

Pedestals

EH3 - DIN size pedestals

		DIN 00	DIN 0	DIN 1	DIN 2	
Type EH3 / F (H=875) **IP44**						
		EH3 / F - 00	**EH3 / F - 0**	**EH3 / F - 1**	**EH3 / F - 2**	
	H x W x D	875x455x320	875x590x320	875x785x320	875x1115x320	
Factory-assembled	**Type**	EH3C8XC1	EH3C80S1	EH3C81S1	EH3C82S1	
	Order code	4TBE843670C0100	4TBE843158C0100	4TBE843160C0100	4TBE843162C0100	
Type EH3 / AP (H=875) **IP44**						
		EH3 / AP - 00	**EH3 / AP - 0**	**EH3 / AP - 1**	**EH3 / AP - 2**	**EH3 / AP - 3**
	H x W x D	875x455x320	875x590x320	875x785x320	875x1115x320	875x1445x320
Factory-assembled	**Type**	EH3C8XC2	EH3C80S2	EH3C81S2	EH3C82S2	EH3C83S2
	Order code	4TBE843672C0100	4TBE843176C0100	4TBE843177C0100	4TBE843178C0100	4TBE843179C0100
Assembled, with UV coating	**Type**	EH3U8XC2	EH3U80S2	EH3C91S2	EH3C92S2	EH3C93S2
	Order code	4TBE843673N0100	4TBE843480C2100	4TBE843181C0100	4TBE843182C0100	4TBE843183C0100
Type EH3 / AP (H=1125) **IP44**						
		EH3 / AP - 200	**EH3 / AP - 20**	**EH3 / AP - 21**	**EH3 / AP - 22**	**EH3 / AP - 23**
	H x W x D	1125x455x320	1125x590x320	1125x785x320	1125x1115x320	1125x1445x320
Factory-assembled	**Type**	EH3C9XC2	EH3C90S2	EH3C91S2	EH3C92S2	EH3C93S2
	Order code	4TBE843676C0100	4TBE843180C0100	4TBE843181C0100	4TBE843182C0100	4TBE843183C0100
Assembled, with UV coating	**Type**	EH3U9XC2	EH3U90S2	EH3U91S2	EH3U92S2	EH3U93S2
	Order code	4TBE843677N0100	4TBE843484N2100	4TBE843485N2100	4TBE843486N2100	4TBE843487C2100
Assembled, with UV and anti-graffiti coating	**Type**	EHP3200DAG	EHP320DAG	EHP321DAG	EHP322DAG	EHP323DAG
	Order code	4TBE843731C0100	4TBE843732C0100	4TBE843733C0100	4TBE843734C0100	4TBE843735C0100

Pedestals

EH3 - DIN size pedestals

EH3 / DC - DIN 2 Pedestals with separate compartments

Product			Type	Order code	Pack
EH3 / DC - 2		H x D x W			
	Assembled with 2 double-closure handles	1125 x 1115 x 320	EH3C92D2	4TBE843576C0100	
	Pertinax mounting plate with mounting bolts	915 x 445 x 5	EH3A95P5	4TBE843728C0100	
		915 x 445 x 10	EH3A95P10	4TBE843729C0100	
	2 mounting plates are required per cabinet				

EH3 DIN1 pedestals - Height 1310 mm

EH3 / AP 31 - DIN 1		H x D x W			
	Assembled with handles	1310 x 785 x 320	EH3C61C2	4TBE843689C0100	
	Assembled with double-locking handle	1310 x 785 x 320	EH3C61D2	4TBE843692C0100	
	Pertinax mounting plate with mounting bolts	1100 x 680 x 5	EH3M61EH	4TBE843693C0100	

Pedestals

EH3 - Accessories

DIN bases



			DIN 00	DIN 0	DIN 1	DIN 2	DIN 3
		HxWxD	900x450x310	900x585x310	900x780x310	900x1110x310	900x1430x310
Factory-assembled		**Type**	EH3BEXEH	EH3BE0EH	EH3BE1EH	EH3BE2EH	-
		Order code	4TBE843390N0100	4TBE843391N0100	4TBE843392N0100	4TBE843393C0100	
Polyester base, supplied in kit form, RAL 7035		**Type**	EH3SEXEI	EH3SE0EI	EH3SE1EI	EH3SE2EI	EH3SE3EI
		Order code	4TBE843204R0100	4TBE843205R0100	4TBE843206R0100	4TBE843207R0100	4TBE843208R0100
Base made from recycled material Construction kit, Color similar to RAL 7035		**Type**	EH3SEXEH	EH3SE0EH	EH3SE1EH	EH3SE2EH	EH3SE3EH
		Order code	4TBE842098R0100	4TBE842099R0100	4TBE842100R0100	4TBE842101R0100	4TBE843144R0100

Mounting plates



		HxWxD	665x350x5	665x485x5	665x680x5	705x1000x5	705x1340x5
Pertinax mounting plate		**Type**	EH3M8XEH	EH3M80EH	EH3M81EH	EH3M82EH	EH3M83EI
		Order code	4TBE843681C0100	4TBE843024C0100	4TBE843044C0100	4TBE843057C0100	4TBE843067C0100
		HxWxD	915x350x5	915x485x5	915x680x5	955x1000x5	955x1340x5
Height 1125 mm		**Type**	EH3M9XEH	EH3M90EH	EH3M91EH	EH3M92EH	EH3M93EI
		Order code	4TBE843682C0100	4TBE843070C0100	4TBE843071C0100	4TBE843072C0100	4TBE843256C0100

Base plates



		HxWxD	427x285x3	562x285x3	757x285x3	1086x285x3	1416x285x3
Base plate 3 mm polyester with securing screws		**Type**	EH3PEXEI	EH3PE0EH	EH3PE1EH	EH3PE2EH	EH3PE3EH
		Order code	4TBE843683C0100	4TBE843300C0100	4TBE843301C0100	4TBE843302C0100	4TBE843303C0100

EH3 Pedestals

		H=320mm	H=320mm	H=320mm	H=320mm	
EH3 Pedestal	**Order code**	4TBE843746C0100	4TBE843747C0100	4TBE843748C0100	4TBE843749C0100	
EH3 elevation ground mounting spacer kit			4TBE843750C0100			

Pedestals

EH3 - Accessories

EH3 - Accessories

Product	Type	Order code	Pack
Locks with profile half cylinder			
	With 2 keys , V2432-E		
	EH3AEECI	4TBE843001C0100	1
	Spare keys for EH3AEECI		
	PS832022	4TBP832022C0100	2
	With 1 square key, 8 mm		
	EH3AEEQH	4TBE843002C0100	1
	With an 8 mm triangular key		
	EH3AEETH	4TBE843003C0100	1
	With 2 keys A434		
	EH3UAECI	4TBE843248C0100	1
	Spare keys upon request.		
Diagram holder			
	DIN A4 - W x H = 325 x 180 mm		
	AR811516	4TBX811516R0100	1
	DIN A5 - W x H= 155 x 225 mm		
	PS832000	4TBP832000C0100	1
IP44 ventilation grille			
	Set of 2 pieces		
	PS832019	4TBP832019C0100	1
	Suitable for a ventilation opening Includes 2 grilles and 4 nylon nails. Total insulation. RAL 7035		
Threaded insert			
	M8 threaded insert Dodge-type for rear wall and door.		
	APTIM4	4TBO851026C0100	100

Product	Type	Order code	Pack
Handle			
	Handle for lock with a profile half cylinder		
	EH3EEESH	4TBE843000C0100	1
	Spare part		
Double closure handle			
	For two locks with profile half cylinder		
	EH3AEEDH	4TBE783042C0100	1
	Spare part (Note: for after-market installation, an operation is required on the door mechanism).		

Pedestals

EH3 - Accessories

EH3 - Accessories

Product	Type	Order code	Pack
Front plate with opening for temporary connections on DIN base			
May be used with DIN -00 to -2 bases in RAL 7035 color (EH3SEXEI-EH3SE2EI). This front plate is not standard and must be ordered in addition. The standard closed front plate may be used if it is not necessary for temporary connections. The DIN 3 base is standard with a front plate for temporary connections. The front plates on the front and rear are secured by screws.			
	For DIN 0 base - EH3SE0EI - 1 opening		
	EH3TE0EE	4TBE843713R0100	1
	For DIN 1 base - EH3SE1EI - 1 opening		
	EH3TE1EE	4TBE843714R0100	1
	For DIN 2 base - EH3SE2EI - 2 openings		
	EH3TE2EE	4TBE843715R0100	1
	Standard DIN 3 base with a front plate for temporary connections. The front plates on the front and rear are secured by screws.		
	EH3TE3EE	4TBE843716R0100	1

Product	Type	Order code	Pack
Door locking			
	May be installed on left-hand or right-hand swinging doors. Mounting by drilling 2 holes in the interior profile. Includes mounting parts.		
	EH3AEEEZ	4TBE843007C0100	1
Screws (replacement parts)			
	Clip-in button Hilo 5.8 x 16 mm		
	EH3AEEEN	4TBE843556C0100	1
	Clip-in button Hilo 5.8 x 22 mm		
	EH3OEEEG	4TBE890278C0100	1
Mounting bolts for mounting plates (replacement parts)			
	DIN 00-0-1		
	EH3AE0EI	4TBE843566C0100	1
	DIN 2-3		
	EH3AE2EI	4TBE843567C0100	1

Pedestals

Spare Parts for EH Pedestals

Product	Type	Order code	Pack
EH1 PEDESTAL VENTILATED. CLICK		4TBE841037S0100	1
SPARE-EH3 BOTTOM PROFILE SIZE 0		4TBE843516S0100	1
SPARE-EH3 BOTTOM PROFILE SIZE 1		4TBE843516S0100	1
SPARE-EH3 BOTTOM PROFILE SIZE 2		4TBE843517S0100	1
SPARE-EH3 BOTTOM PROFILE SIZE 3		4TBE843518S0100	1
SPARE-EH3 REAR PANEL SIZE0 F 875		4TBE843519S0100	1
SPARE-EH3 REAR PANEL SIZE1 F 875		4TBE843521S0100	1
SPARE-EH3 REAR PANEL SIZE0 AP 875		4TBE843531S0100	1
SPARE-EH3 REAR PANEL SIZE1 AP 875		4TBE843533S0100	1
SPARE-EH3 DOOR SIZE2 AP 875 LEFT		4TBE843538S0100	1
SPARE-EH3 DOOR SIZE3 AP 875 LEFT		4TBE843542S0100	1
SPARE-EH3 REAR PANEL SIZE0 AP 1125		4TBE843543S0100	1
SPARE-EH3 REAR PANEL SIZE1 AP 1125		4TBE843545S0100	1
SPARE-EH3N SIDE-PANEL 875 RIGHT		4TBE843591S0100	1
SPARE-EH3N SIDE-PANEL 875 LEFT		4TBE843592S0100	1
SPARE-EH3N SIDE-PANEL 1125 RIGHT		4TBE843593S0100	1
SPARE-EH3N SIDE-PANEL 1125 LEFT		4TBE843594S0100	1
SPARE-EH3N ROOF DIN 0		4TBE843599S0100	1
SPARE-EH3N ROOF DIN 1		4TBE843600S0100	1
SPARE-EH3N ROOF DIN 2		4TBE843601S0100	1
SPARE-EH3N ROOF DIN 3		4TBE843602S0100	1
SPARE-EH3N MIDDLE-BEAM 875		4TBE843603S0100	1
SPARE-EH3N MIDDLE-BEAM 1125		4TBE843604S0100	1
SPARE-EH3N DOORPOST 875		4TBE843605S0100	1
SPARE-EH3N DOORPOST 1125		4TBE843606S0100	1
SPARE-EH3N BACK-PANEL SIZE 2 F 875		4TBE843607S0100	1
SPARE-EH3N BACK-PANEL SIZE 2 AP 875		4TBE843609S0100	1
SPARE-EH3N BACK-PANEL SIZE 3 AP 875		4TBE843610S0100	1
SPARE-EH3N BACK-PANEL SIZE 2 AP 1125		4TBE843611S0100	1
SPARE-EH3N BACK-PANEL SIZE 3 AP 1125		4TBE843612S0100	1
SPARE-EH3N DOOR SIZE 2 F 875 W/O HANDLE LEFT		4TBE843615S0100	1
SPARE-EH3N DOOR SIZE 2 AP 1125 W/O HANDLE LEFT		4TBE843627S0100	1
SPARE-EH3N DOOR SIZE 3 AP 1125 W/O HANDLE LEFT		4TBE843630S0100	1

Notes

Pedestals

EH3 - system parts

EH3 / F (H = 875)

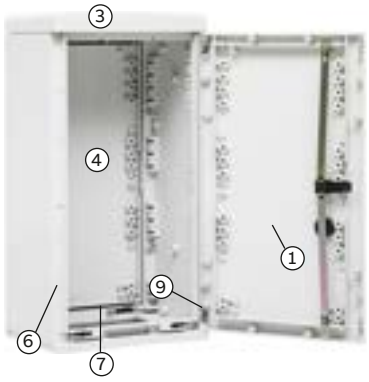

	Type		DIN 00	
	EH3 / F (H=875)		EH3 / F - 00	
			left-hand	right-hand
①	Door (with handle)	Type		EH3A8XC1
		Order code		4TBE843639N0100
②	Door stop	Type	-	-
		Order code		
③	Hood	Type	EH3AEXE5	EH3AEXE5
		Order code	4TBE843634C0100	4TBE843634C0100
④	Rear wall **(you will require 2 for DIN2 and DIN3)**	Type	EH3A8XE7	EH3A8XE7
		Order code	4TBE843636C0100	4TBE843636C0100
⑤	Center cross member	Type	-	-
		Order code		
⑥	Side panel	Type	EH3A8EEN	EH3A8EEM
		Order code	4TBE843592C0100	4TBE843591C0100
⑦	Base profile	Type	EH3AEXEC	EH3AEXEC
		Order code	4TBE843514C0100	4TBE843514C0100
⑧	Cross member	Type	-	-
		Order code		
⑨	Set of hinges **(you will require 2 for DIN2 and DIN3)**	Type	EH3AEEEL	EH3AEEEL
		Order code	4TBE843445C0100	4TBE843445C0100
⑩	Set of accessories	Type	EH3AE0EG	EH3AE0EG
		Order code	4TBE843447N0100	4TBE843447N0100

	Type		DIN 00	
	EH3 / AP (H=875)			
			left-hand	right-hand
①	Door (with handle)	Type		EH3A8XC2
		Order code		4TBE843640C0100
②	Door stop	Type	-	-
		Order code		
③	Hood	Type	EH3AEXE5	EH3AEXE5
		Order code	4TBE843634C0100	4TBE843634C0100
④	Rear wall **(you will require 2 for DIN2 and DIN3)**	Type	EH3A8XE8	EH3A8XE8
		Order code	4TBE843637C0100	4TBE843637C0100
⑤	Center cross member	Type	-	-
		Order code		
⑥	Side panel	Type	EH3A8EEN	EH3A8EEM
		Order code	4TBE843592C0100	4TBE843591C0100
⑦	Base profile	Type	EH3AEXEC	EH3AEXEC
		Order code	4TBE843514C0100	4TBE843514C0100
⑧	Cross member	Type	-	-
		Order code		
⑨	Set of hinges **(you will require 2 for DIN2 and DIN3)**	Type	EH3AEEEL	EH3AEEEL
		Order code	4TBE843445C0100	4TBE843445C0100
⑩	Set of accessories	Type	EH3AE0EG	EH3AE0EG
		Order code	4TBE843447N0100	4TBE843447N0100

For polyester parts with anti-erosion UV coating, please contact us.

① Door (with handle)
② Door stop
③ Hood
④ Rear wall
⑤ Center cross member
⑥ Side panel
⑦ Base profile
⑧ Cross member
⑨ Set of hinges
⑩ The set of accessories includes bolts, washers and nuts for polyester cabinet assembly.

Pedestals

EH3 - system parts

DIN 0		DIN 1		DIN 2	
EH3 / F - 0		**EH3 / F - 1**		**EH3 / F - 2**	
left-hand	**right-hand**	**left-hand**	**right-hand**	**left-hand**	**right-hand**
	EH3A80E1		EH3A81SH	EH3A82EM	EH3A82CA
	4TBE843035N0100		4TBE843049N0100	4TBE843615C0100	4TBE843614C0100
-	-	-	-	EH3A8EER	EH3A8EER
				4TBE843605C0100	4TBE843605C0100
EH3AE0EJ	EH3AE0EJ	EH3AE1EH	EH3AE1EH	EH3AE2EJ	EH3AE2EJ
4TBE843599C0100	4TBE843599C0100	4TBE843600C0100	4TBE843600C0100	4TBE843601C0100	4TBE843601C0100
EH3A80EI	EH3A80EI	EH3A81EF	EH3A81EF	EH3A82EF	EH3A82EF
4TBE843519C0100	4TBE843519C0100	4TBE843521C0100	4TBE843521C0100	4TBE843607C0100	4TBE843607C0100
-	-	-	-	EH3A8EEQ	EH3A8EEQ
				4TBE843603C0100	4TBE843603C0100
EH3A8EEN	EH3A8EEM	EH3A8EEN	EH3A8EEM	EH3A8EEN	EH3A8EEM
4TBE843592C0100	4TBE843591C0100	4TBE843592C0100	4TBE843591C0100	4TBE843592C0100	4TBE843591C0100
EH3AE0EH	EH3AE0EH	EH3AE1EC	EH3AE1EC	EH3AE2EH	EH3AE2EH
4TBE843515C0100	4TBE843515C0100	4TBE843516C0100	4TBE843516C0100	4TBE843517C0100	4TBE843517C0100
-	-	-	-	-	-
EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL
4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100
EH3AE0EG	EH3AE0EG	EH3AE0EG	EH3AE0EG	EH3AE2EG	EH3AE2EG
4TBE843447N0100	4TBE843447N0100	4TBE843447N0100	4TBE843447N0100	4TBE843452C0100	4TBE843452C0100

DIN 0		DIN 1		DIN 2		DIN 3	
EH3 / AP - 0		**EH3 / AP - 1**		**EH3 / AP - 2**		**EH3 / AP - 3**	
left-hand	**right-hand**	**left-hand**	**right-hand**	**left-hand**	**right-hand**	**left-hand**	**right-hand**
	EH3A80S2		EH3A81S2		EH3A82S2		EH3A83SH
	4TBE843101C0100		4TBE843104C0100		4TBE843108C0100		4TBE843369C0100
-	-	-	-	EH3A8EER	EH3A8EER	EH3A8EER	EH3A8EER
				4TBE843605C0100	4TBE843605C0100	4TBE843605C0100	4TBE843605C0100
EH3AE0EJ	EH3AE0EJ	EH3AE1EH	EH3AE1EH	EH3AE2EJ	EH3AE2EJ	EH3AE3EJ	EH3AE3EJ
4TBE843599C0100	4TBE843599C0100	4TBE843600C0100	4TBE843600C0100	4TBE843601C0100	4TBE843601C0100	4TBE843602C0100	4TBE843602C0100
EH3A83EA	EH3A83EA	EH3A81EA	EH3A81EA	EH3A82EL	EH3A82EL	EH3A83EL	EH3A83EL
4TBE843531C0100	4TBE843531C0100	4TBE843533C0100	4TBE843533C0100	4TBE843609C0100	4TBE843609C0100	4TBE843610C0100	4TBE843610C0100
-	-	-	-	EH3A8EEQ	EH3A8EEQ	EH3A8EEQ	EH3A8EEQ
				4TBE843603C0100	4TBE843603C0100	4TBE843603C0100	4TBE843603C0100
EH3A8EEN	EH3A8EEM	EH3A8EEN	EH3A8EEM	EH3A8EEN	EH3A8EEM	EH3A8EEN	EH3A8EEM
4TBE843592C0100	4TBE843591C0100	4TBE843592C0100	4TBE843591C0100	4TBE843592C0100	4TBE843591C0100	4TBE843592C0100	4TBE843591C0100
EH3AE0EH	EH3AE0EH	EH3AE1EC	EH3AE1EC	EH3AE2EH	EH3AE2EH	EH3AE3EI	EH3AE3EI
4TBE843515C0100	4TBE843515C0100	4TBE843516C0100	4TBE843516C0100	4TBE843517C0100	4TBE843517C0100	4TBE843518C0100	4TBE843518C0100
-	-	-	-	-	-	-	-
EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL
4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100
EH3AE0EG	EH3AE0EG	EH3AE0EG	EH3AE0EG	EH3AE2EG	EH3AE2EG	EH3AE2EG	EH3AE2EG
4TBE843447N0100	4TBE843447N0100	4TBE843447N0100	4TBE843447N0100	4TBE843452C0100	4TBE843452C0100	4TBE843452C0100	4TBE843452C0100

Pedestals

EH3 - system parts

EH3 / AP (H = 1125)

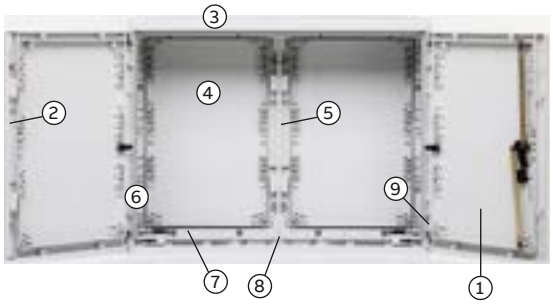

	Type		DIN 00	
	EH3 / AP (H = 1125)			
			left-hand	right-hand
①	Door (with handle)	Type		EH3A9XC2
		Order code		4TBE843641C0100
②	Door stop	Type	-	-
		Order code		
③	Hood	Type	EH3AEXE5	EH3AEXE5
		Order code	4TBE843634C0100	4TBE843634C0100
④	Rear wall **(you will require 2 for DIN2 and DIN3)**	Type	EH3A9XE8	EH3A9XE8
		Order code	4TBE843638C0100	4TBE843638C0100
⑤	Center cross member	Type	-	-
		Order code		
⑥	Side panel	Type	EH3A9EEM	EH3A9EEL
		Order code	4TBE843594C0100	4TBE843593C0100
⑦	Base profile	Type	EH3AEXEC	EH3AEXEC
		Order code	4TBE843514C0100	4TBE843514C0100
⑧	Cross member	Type	-	-
		Order code		
⑨	Set of hinges **(you will require 2 for DIN2 and DIN3)**	Type	EH3AEEEL	EH3AEEEL
		Order code	4TBE843445C0100	4TBE843445C0100
⑩	Set of accessories	Type	EH3AE0EG	EH3AE0EG
		Order code	4TBE843447N0100	4TBE843447N0100

Note: Set of accessories including bolts, washers and nuts for mounting separate parts inside the cabinet.

① Door (with handle)
② Door stop
③ Hood
④ Rear wall
⑤ Center cross member
⑥ Side panel
⑦ Base profile
⑧ Cross member
⑨ Set of hinges
⑩ The set of accessories includes bolts, washers and nuts for polyester cabinet assembly.

Pedestals

EH3 - system parts

DIN 0		DIN 1		DIN 2		DIN 3	
EH3 / AP - 20		EH3 / AP - 21		EH3 / AP - 22		EH3 / AP - 23	
left-hand	right-hand	left-hand	right-hand	left-hand	right-hand	left-hand	right-hand
	EH3A90S1		EH3A91S1	EH3A92EJ	EH3A92CA	EH3A93EL	EH3A93CA
	4TBE843117N0100		4TBE843120C0100	4TBE843627C0100	4TBE843626C0100	4TBE843630C0100	4TBE843629C0100
-	-	-	-	EH3A9EEQ	EH3A9EEQ	EH3A9EEQ	EH3A9EEQ
				4TBE843606C0100	4TBE843606C0100	4TBE843606C0100	4TBE843606C0100
EH3AE0EJ	EH3AE0EJ	EH3AE1EH	EH3AE1EH	EH3AE2EJ	EH3AE2EJ	EH3AE3EJ	EH3AE3EJ
4TBE843599C0100	4TBE843599C0100	4TBE843600C0100	4TBE843600C0100	4TBE843601C0100	4TBE843601C0100	4TBE843602C0100	4TBE843602C0100
EH3A90E8	EH3A90E8	EH3A91EA	EH3A91EA	EH3A92EA	EH3A92EA	EH3A93EK	EH3A93EK
4TBE843543C0100	4TBE843543C0100	4TBE843545C0100	4TBE843545C0100	4TBE843611C0100	4TBE843611C0100	4TBE843612C0100	4TBE843612C0100
-	-	-	-	EH3A9EEP	EH3A9EEP	EH3A9EEP	EH3A9EEP
				4TBE843604C0100	4TBE843604C0100	4TBE843604C0100	4TBE843604C0100
EH3A9EEM	EH3A9EEL	EH3A9EEM	EH3A9EEL	EH3A9EEM	EH3A9EEL	EH3A9EEM	EH3A9EEL
4TBE843594C0100	4TBE843593C0100	4TBE843594C0100	4TBE843593C0100	4TBE843594C0100	4TBE843593C0100	4TBE843594C0100	4TBE843593C0100
EH3AE0EH	EH3AE0EH	EH3AE1EC	EH3AE1EC	EH3AE2EH	EH3AE2EH	EH3AE3EI	EH3AE3EI
4TBE843515C0100	4TBE843515C0100	4TBE843516C0100	4TBE843516C0100	4TBE843517C0100	4TBE843517C0100	4TBE843518C0100	4TBE843518C0100
-	-	-	-	EH3AEEES	EH3AEEES	EH3AEEES	EH3AEEES
				4TBE843631C0100	4TBE843631C0100	4TBE843631C0100	4TBE843631C0100
EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL	EH3AEEEL
4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100	4TBE843445C0100
EH3AE0EG	EH3AE0EG	EH3AE0EG	EH3AE0EG	EH3AE2EG	EH3AE2EG	EH3AE2EG	EH3AE2EG
4TBE843447N0100	4TBE843447N0100	4TBE843447N0100	4TBE843447N0100	4TBE843452C0100	4TBE843452C0100	4TBE843452C0100	4TBE843452C0100

Pedestals

EH3 / GD - DIN size pedestals deep version

EH3 GD deep cabinets

Applications

- Energy distribution
- Gas meter cabinet
- Control cabinet and
- Generators and transformer stations
- Pump house installation
- Cabinet for 19" power supply frame
- Rectifiers

Standard: EN / IEC 61439-5

Specifications and advantages

- Doors, back and side walls made from hot molded glass fiber-reinforced polyester.
- RAL 7035 dyed in the mass gray color.
- Glass fiber-reinforced hand lay-up polyester hood.
- Hood with RAL 7035 outer coating.
- Nine sizes in two heights, two depths and three widths.
  Cabinets supplied assembled.
- Supplied factory-assembled or in kit form.
- IP44 protection rating in accordance with EN/IEC 60529.
- Total insulation ⧈.
- IK10 protection rating against external mechanical impacts in accordance with EN/IEC 62262.
- Corrosion-resistant.
- UV-stable for outdoors installation.
- Resistant to temperatures of between -35 C and +80 C.

Temporary temperature increases cause no damage

- This handle is not flush-fitting, increases the usable depth of the cabinet and can be fitted with semi-cylindrical locks.
- Doors can be removed manually for ease of access for maintenance tasks.
- Option to have the door side-opening or bottom-opening.
- The mounting holes for receiving M8 threaded inserts located on the rear panel allow direct access for installing sets of busbars, frames or mounting plates.
- Option to have the door side-opening or bottom-opening.
- Supplied with mounting points for installation on the ground or on a base.
- The shape of the hood prevents standing water which could stagnate.
- The anti-poster surfaces make it very difficult to affix posters and result in them falling away.

Pedestals

EH3 / GD - DIN size pedestals deep version

EH3 / GD - DIN size pedestals deep version

		Width	**676**	**871**	**1200**
Type EH3 / GD **Height 875 mm** **IP44 assembled cabinet**					
		Type	**EH3 / GD-AP - 031**	**EH3 / GD-AP - 041**	**EH3 / GD-AP - 051**
		HxWxD	875x676x541	875x871x541	875x1200x541
Depth 541 mm		**Type**	EH3G86C2	EH3G87C2	EH3G88C2
		Order code	4TBE843645C0100	4TBE843646C0100	4TBE843647N0100
Type EH3 / GD **Height 1125 mm** **IP44 assembled cabinet**					
		Type	**EH3 / GD-AP - 233**	**EH3 / GD-AP - 243**	**EH3 / GD-AP - 253**
		HxWxD	1125x676x541	1125x871x541	1125x1200x541
Depth 541 mm		**Type**	EH3G96C2	EH3G97C2	EH3G98C2
		Order code	4TBE843651C0100	4TBE843652C0100	4TBE843653C0100
		HxWxD	1125x676x676	1125x871x676	1125x1200x676
Depth 676 mm		**Type**	EH3G96CA	EH3G97CA	EH3G98CA
		Order code	4TBE843654C0100	4TBE843655C0100	4TBE843656C0100
	**Mounting plate**	HxWxD	665x485x5	665x680x5	705x1000x5
	Height = 875 mm	**Type**	EH3M80EH	EH3M81EH	EH3M82EH
		Order code	4TBE843024C0100	4TBE843044C0100	4TBE843057C0100
		HxWxD	915x485x5	915x680x5	915x1000x5
	Height = 1125 mm	**Type**	EH3M90EH	EH3M91EH	EH3M92EH
		Order code	4TBE843070C0100	4TBE843071C0100	4TBE843072C0100
	**Base plate**	HxWxD	676 x 541	871 x 541	1200 x 541
	Depth = 541 mm	**Type**	EH3PE6EH	EH3PE7EH	EH3PE8EH
		Order code	4TBE843657C0100	4TBE843658C0100	4TBE843659C0100
		HxWxD	676 x 676	871 x 676	1200 x 676
	Depth = 676 mm	**Type**	EH3PE6EI	EH3PE7EI	EH3PE8EI
		Order code	4TBE843660C0100	4TBE843661C0100	4TBE843662C0100
	3 mm polyester with securing screws				
	**Polyester base - Supplied in kit form for cabinets**	HxWxD	900x676x541	900x871x541	900x1200x541
	Depth = 541 mm	**Type**	EH3BE6EH	EH3BE7EH	EH3BE8EH
		Order code	4TBE843663C0100	4TBE843664C0100	4TBE843665C0100
		HxWxD	900x676x676	900x871x676	900x1200x676
	Depth = 676 mm	**Type**	EH3BE6EI	EH3BE7EI	EH3BE8EI
		Order code	4TBE843666C0100	4TBE843667C0100	4TBE843668C0100

Pedestals

EH3 / GD - Accessories

EH3 - Accessories

Product	Type	Order code	Pack
Locks with profile half cylinder			
	With 2 keys , V2432-E		
	EH3AEECI	4TBE843001C0100	1
	Spare keys for EH3AEECI		
	PS832022	4TBP832022C0100	2
	With 1 square key, 8 mm		
	EH3AEEQH	4TBE843002C0100	1
	With an 8 mm triangular key		
	EH3AEETH	4TBE843003C0100	1
	With 2 keys A434		
	EH3UAECI	4TBE843248C0100	1
	Spare keys upon request.		
Diagram holder			
	DIN A4 - W x H = 325 x 180 mm		
	AC811516	4TBC811516C0100	1
	DIN A5 - W x H= 155 x 225 mm		
	PS832000	4TBP832000C0100	1
IP44 ventilation grille			
	Set of 2 pieces		
	PS832019	4TBP832019C0100	1
	Suitable for a ventilation opening Includes 2 grilles and 4 nylon nails. Total insulation. RAL 7035		
Threaded insert			
	M8 threaded insert Dodge-type for rear wall and door.		
	APTIM4	4TBO851026C0100	100

Product	Type	Order code	Pack
Handle			
	Handle for lock with a profile half cylinder		
	EH3EEESH	4TBE843000C0100	1
	Spare part		
Double closure handle			
	For two locks with profile half cylinder		
	EH3AEEDH	4TBE783042C0100	1
	Spare part (Note: for after-market installation, an operation is required on the door mechanism).		

Pedestals

EH4 - Column cabinets

EH4 Column Cabinets

Applications
- Energy distribution
- Cable television
- Traffic signaling
- Camp sites
- Gas stations

Standard: EN / IEC 61439-5

Specifications
- Doors, back and side walls made from hot molded glass fiber-reinforced polyester.
- RAL 7035 dyed in the mass gray color.
- IP44 protection rating in accordance with EN/IEC 60529.
- Total insulation ⧈.
- IK10 protection rating against external mechanical impacts in accordance with EN/IEC 62262.
- Corrosion-resistant.
- UV-stable for outdoors installation.
- Resistant to temperatures of between -35 C and +80 C, temporary temperature increases cause no damage.
- The mounting holes for receiving M6 threaded inserts located on the rear panel allow direct access for installing sets of busbars, frames or mounting plates.
- The lower section of the column provides a stable mounting into the ground
- The shape of the hood prevents standing water which could stagnate.

EH4
- Cabinet with hinged door - IP44.
- The column and lower section are supplied together.
- Supplied with handle for semi-cylindrical lock.
- Door opening angle of 180°.

EH4-S
- Cabinet with removable front components - IP44.
- The lower and rear sections of the column are molded as a single piece.
- The front of the column has a recessed housing for a cylindrical
- lock, protected by a plastic anti-vandalism cover.
- Easy to access thanks to removable front panels.

Pedestals

EH4 - Column cabinets

EH4/ EH4S - Distribution columns

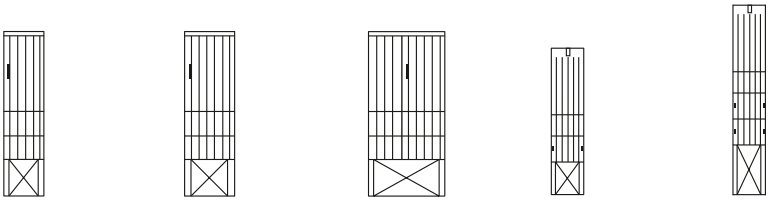

		Width	395	495	745	320	320
		Type	**EH4-00**	**EH4-0**	**EH4-1**	**EH4-S1**	**EH4-S2**
		H x W x D	1600 x 395 x 224	1600 x 495 x 224	1600 x 745 x 224	1420 x 320 x 234	1850 x 320 x 234
		Type	EH4CAECH	EH4CAECI	EH4CAEL	EH4CB9CH	EH4CC9CH
		Order code	4TBE844130R0100	4TBE844131R0100	4TBW844132C0100	4TBE844153R0100	4TBE844185R0100
		H x W x D	790 x 370 x 5	790 x 470 x 5	790 x 720 x 5	600 x 278 x 5	950 x 278 x 5
	Pertinax mounting plate with securing screws	**Type**	EH4MEXEH	EH4ME0EH	EH4ME1EH	EH4MB9EH	EH4MC9EH
		Order code	4TBE844133C0100	4TBE844134C0100	4TBE844135N0100	4TBE844154R0100	4TBE844186R0100

Accessories

Product	Type	Order code	Pack
Locks with profile half cylinder			
	For EH4 - security lock V2432E		
	PS832030	4TBP832030C0100	1
	Spare keys for PS832030		
	PS832741	4TBP832741R0100	2
	For EH4 - security lock V2432E with double closure		
	PS832331	4TBE832331R0100	1
	Spare keys for 843001		
	PS832022	4TBP832022C0100	1
	Spare keys upon request.		

Product	Type	Order code	Pack
Double closure handle			
	For two locks with profile half cylinder		
	EH4AEEDH	4TBE844152R0100	1
	Spare part (Note: for after-market installation, an operation is required on the door mechanism).		

Notes

JUNCTION BOXES

Electrical installation solutions for buildings
Junction boxes

Index

Livorno Series emergency consumer units

Technical details designed to facilitate installation	2
Livorno Series emergency consumer units	4

IP44, IP55 and IP65 Junction boxes

The details make the difference	8
IP44, IP55 and IP65 Junction boxes	10
IP 44, IP 55 and IP 65 junction boxes in thermoplastic material	13

Europa65 junction boxes

Technical details designed to facilitate installation	16
Order codes	19
Order codes – accessories	20

BEGEI Product lines

Flex-o-Box	22
Serie 55	25

Livorno Series emergency consumer units

Technical details designed to facilitate installation

Three degrees of protection IP40, IP55, IP65 allow to install these emergency consumer units in any environment, residential, tertiary or industrial

The self-extinguishing thermoplastic frame ensures resistance to abnormal heat and fire

The front door is equipped with a protective glass that can be broken in case of need using the glass-breaking hammer (included)

The flush-mounting, wall-mounting or DIN rail versions offer extensive installation choices

Livorno Series emergency consumer units
Technical details designed to facilitate installation

The Livorno Series is a range of emergency consumer units equipped with an emergency breakable glass to quickly and effectively stop systems or services in the case of malfunctions or dangers that may occur in residential, tertiary or industrial installations.

Made of self-extinguishing thermoplastic material, these devices are mainly installed in those environments that have greater risk of fire.
The flush- and wall-mounting versions can be equipped with a luminous button and glass-breaking hammer.

Enclosures

Livorno Series emergency consumer units

Consumer units, technical specifications

Protection class	IP40, IP55 or IP65, according to version.
Version	flush- and wall-mounting.
Colour	RAL 3000 red and RAL 7035 grey.
Installation temperature	-25°C ÷ +60°C.
Resistance to heat	ball thermopressure up to +85°C according to EN 60695-10-2 standard.
Front door	breakable glass 0.75 (IK05 degree).
Material	self-extinguishing thermoplastic material, resistant to abnormal heat and fire up to 650°C (glow wire test), according to IEC 60695-2-11 standard.
Door lock	coded-type key
Included accessories	module covers (per DIN rail versions)
	4 screw cover plugs
	certification plate

Consumer units with emergency button, technical specifications

Protection degree	IP55.
Version	flush- and wall-mounting
Colour	RAL 3000 red.
Installation temperature	-25°C ÷ +60°C.
Rated operating voltage Ue	250 V.
Utilisation category	AC 12.
Rated operating voltage Ie	2 A.
Rated insulation voltage Ui	250 V.
Pollution degree	3.
Fuses	10 A, gG type, 10.3x38 mm.
Front door	breakable glass 0.75 (IK05 degree).
Material	self-extinguishing thermoplastic material, resistant to abnormal heat and fire up to 650°C (glow wire test), according to IEC 60695-2-11 standard.
Luminous button	with 1 NO contact + 1 NC contact (2 A, 250 V).
Included accessories	glass-breaking hammer.
Optional accessories	12 or 24 V bulb lamp (incandescent), or 250 V (fluorescent).
Conformity	EN 60670-1 standard.
Mark of approval	IMQ according to EN 60670-1

Enclosures

Livorno Series emergency consumer units

M131830000

M131430000

Description	IP rating	Dimensions WxHxD [mm]	Order details		Pack. pc.
			Type	Order code	
Flush-mounting version					
RAL 3000 red colour. Possible installation on flush-mounting box with 83.5 mm centre distance. Equipped with luminous button (bulb lamp* - 12 V and 24 V incandescent or 250 V fluorescent), with 1 NO contact + 1 NC contact (2 A, 250 V), complete with glass-breaking hammer.	IP55	100x100x50	-	M131830000	1/13
RAL 7035 grey colour. With DIN rail x 6 mod.	IP40	200x245x82	-	M131430000	1/7

* lamp not included

Enclosures

Livorno Series emergency consumer units

M131800000

M131710020
M131750020

Description	IP rating	Dimensions WxHxD [mm]	Order details		Pack. pc.
			Type	Order code	
Wall-mounting version					
RAL 3000 red colour. Equipped with luminous button (bulb lamp* - 12 V and 24 V incandescent or 250 V fluorescent), with 1 NO contact + 1 NC contact (2 A, 250 V), complete with glass-breaking hammer. Ⓜ	IP55	100x100x50	-	M131800000	1/14
RAL 3000 red colour. Equipped with flanges for easy branch connections. With DIN rail x 8 mod.	IP65	205x220x140	-	M131710020	1/6
RAL 3000 red colour. Equipped with flanges for easy branch connections. With panel.	IP65	205x220x140	-	M131750020	1/6

* lamp not included

Enclosures

Livorno Series emergency consumer units

M131900000

M128580000

Description	Order details		Pack.
	Type	Order code	pc.
Accessories			
Spare lid for consumer units with emergency button	-	M131900000	10/40
Fixing brackets for IP65 insulated consumer units only	-	M128580000	20/240

IP44, IP55 and IP65 Junction boxes

The details make the difference

High resistance to heat and chemical and atmospheric agents

Installation temperature from -25 °C to +60 °C

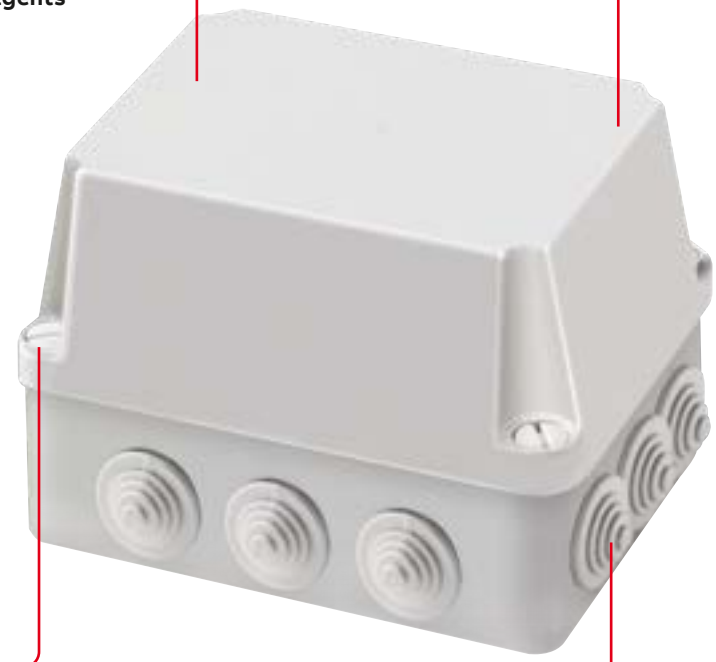

Three lid types available: press-on, with steel screws and with plastic screws with a ¼ turn closing

Boxes with protection degree IP55 and IP65 are composed of a patented lid produced in a single pressing phase together with its seal

IP44, IP55 and IP65 Junction boxes
The details make the difference

A wide range for all needs.
There are IP44 for press-on lid boxes with cable glands, IP55 for screw-on lid boxes with cable glands and IP65 for screw-on lid box with smooth sides.

Some versions of the IP44 and IP55 junction boxes are already equipped with cable glands.

Boxes with protection degree IP55 and IP65 are composed of a patented lid produced in a single pressing phase together with its seal.

Now new: All IP65 junction boxes (with smooth sides) are manufactured in halogen free thermoplastic material.

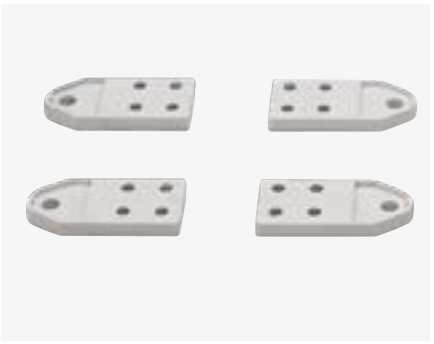

Wall-mounting is also possible.
All junction boxes measuring 160x135, 220x170 and 310x240 mm can be mounted on the wall with brackets (accessory; code M128580000).

All IP44, IP55 and IP65 junction boxes are also available in thermoplastic material, self-extinguishing in compliance with UL 94 V2 Standard and resistant to abnormal heat and fire up to 960 °C GWT.

Enclosures

IP44, IP55 and IP65 Junction boxes

- IP44, IP55 and IP65 Junction boxes for swimming pool control equipment, washing car centers, garages, building services, automatic garden lighting and watering, traffic signs, photovoltaic installations.
- Protection degree: IP44 for press-on lid boxes with cable glands, IP55 for screw-on lid boxes with cable glands, IP65 for screw-on lid box with smooth sides
- Shock resistant: IK07 for IP44 boxes, IK08 for IP55 and IP65 boxes
- IP44 and IP55 boxes with press-on lids in thermoplastic material, self-extinguishing in compliance with UL 94 HB Standard and resistant to abnormal heat and fire up to 650°C (glow wire flammability index) in compliance with IEC 60695-2-11 Standard
- IP65 boxes with screw-on lids in halogen free thermoplastic material, self-extinguishing in compliance with UL 94 HB Standard and resistant to abnormal heat and fire up to 650°C (glow wire flammability index) in compliance with IEC 60695- 2-11 Standard
- Installation temperature from -25°C to +60°C; Resistant to heat: ball thermopressure up to +85°C for IP44, IP55 and IP65 junction boxes
- Boxes with protection degree IP55 and IP65 are composed of a patented lid produced in a single pressing phase together with its seal
- All junction boxes made in compliance with IEC 60670-1 and IEC 60670-22 Standards
- IP44 and IP55 junction boxes in thermoplastic material obtained the IMQ mark of approval
- All the boxes are RoHS compliance

All IP44, IP55 and IP65 junction boxes are also available in thermoplastic material, self-extinguishing in compliance with UL 94 V2 Standard and resistant to abnormal heat and fire up to 960°C (glow wire flammability index) in compliance with IEC 60695-2-11 Standard.

IP44 boxes

IP44 boxes

IP55

Description	Dimensions HxWxD [mm]	Order code	Box/Pack No items
IP44 boxes - GWT 650°C With cable glands and press-on lid			
IP44-Snap-on cover - GWT 650°C	Ø 60 - H 35	M008000000	6/240
	Ø 80 - H 40	M008020000	6/144
	65x65x32	M008080000	3/168
	80x80x40	M008100000	5/100
IP55 waterproof boxes with plastic 1/4 turn screws - GWT 650°C With cable glands and low screw-on lid RAL 7035			
IP55-Cable glands-low lid-1/4TS GWT 650°C	100x100x50	1SL0816A00	1/54
	105x70x50	1SL0820A00	1/70
	100x100x80	1SL0821A00	1/40
	153x110x66	1SL0822A00	1/32
IP55-Cable glands-low lid-1/4TS GWT 650°C*	160x135x77	1SL0824A00	1/18
	220x170x80	1SL0826A00	1/12
	310x240x110	1SL0828A00	1/6

* Can be wall-mounted using wall brackets code M128580000.

Enclosures

IP44, IP55 and IP65 Junction boxes

IP65

IP65

IP55

IP65

IP65

Description	Dimensions HxWxD [mm]	Order code	Box/Pack No items
IP65 waterproof boxes with plastic 1/4 turn screws - GWT 650°C halogen free With smooth sides and low screw-on lid RAL 7035			
IP65-Smooth-low lid-1/4TS GWT 650°C halogen free	100x100x50	1SL0846A00	1/60
	105x70x50	1SL0850A00	1/100
	100x100x80	1SL0851A00	1/40
	153x110x66	1SL0852A00	1/32
IP65-Smooth-low lid-1/4TS GWT 650°C halogen free*	160x137x77	1SL0854A00	1/34
	220x170x80	1SL0856A00	1/12
	310x240x110	1SL0858A00	1/6
With smooth sides and transparent low screw-on lid			
IP65-Smooth-low transparent lid-1/4TS GWT 650°C halogen free	153x110x66	1SL0872A00	1/34
IP65-Smooth-low transparent lid-1/4TS GWT 650°C halogen free*	160x135x77	1SL0874A00	1/24
	220x170x80	1SL0876A00	1/12
	310x240x110	1SL0878A00	1/6
IP55 waterproof boxes with steel screws - GWT 650°C With cable glands and high screw-on lid RAL 7035			
IP55- Cable glands-low lid - GWT 650°C	100x100x50	M008160000	1/54
	105x70x50	M008200000	1/70
	100x100x80	M008210000	1/40
	153x110x66	M008220000	1/32
IP65 waterproof boxes with steel screws - GWT 650°C halogen free With smooth sides and high screw-on lid RAL 7035			
IP65- Smooth W.-low lid - GWT 650°C halogen free	100x100x50	M008460000	1/60
	105x70x50	M008500000	1/100
	100x100x80	M008510000	1/40
	153x110x66	M008520000	1/34
With Smooth sides and transparent high screw-on lid			
IP65- Smooth W.-transparent. low lid-153X110X66 GWT 650°C halogen free	151x110x66	M008720000	1/34

* Can be wall-mounted using wall brackets code M128580000.

Enclosures

IP44, IP55 and IP65 Junction boxes

IP55

IP65

IP65

Description	Dimensions HxWxD [mm]	Order code	Box/Pack No items
IP55 waterproof boxes with plastic 1/4 turn screws - GWT 650°C With Cable glands and high screw-on lid RAL 7035			
IP55-Cable glands-high lid -1/4TS GWT 650°C	160x135x150	1SL0830A00	1/16
	220x170x150	1SL0832A00	1/8
	310x240x160	1SL0834A00	1/4
IP65 waterproof boxes with plastic 1/4 turn screws - GWT 650°C halogen free With Smooth sides and high screw-on lid RAL 7035			
IP65-Smooth-high lid -1/4TS GWT 650°C halogen free	160x135x150	1SL0860A00	1/16
	220x170x150	1SL0862A00	1/8
	310x240x160	1SL0864A00	1/4
With Smooth sides and transparent high screw-on lid			
IP65-Smooth-high transparent lid -1/4TS GWT 650°C halogen free*	160x135x150	1SL0880A00	1/16
	220x170x150	1SL0882A00	1/8
	310x240x160	1SL0884A00	1/4

* Can be wall-mounted using wall brackets code M128580000.

Enclosures

IP 44, IP 55 and IP 65 junction boxes in thermoplastic material

IP44

IP44

IP55

IP65

Description	Dimensions HxWxD [mm]	Order code	Box/Pack No items
IP 44 boxes - GWT 960 °C			
With cable glands and press-on lid	Ø 60 - H 35	1SL0900A00	6/240
	Ø 80 - H 40	1SL0901A00	6/144
	65x65x32	1SL0902A00	3/168
	80x80x40	1SL0903A00	5/100
IP 55 waterproof boxes with plastic 1/4 turn screws - GWT 960 °C			
With cable glands and low screw-on lid RAL 7035	100x100x50	1SL0916A00	1/54
	100x100x80	1SL0921A00	1/40
	153x110x66	1SL0922A00	1/32
	160x135x77	1SL0924A00*	1/18
	220x170x80	1SL0926A00*	1/12
	310x240x110	1SL0928A00*	1/6
IP 65 waterproof boxes with plastic 1/4 turn screws - GWT 960 °C			
With smooth sides and low screw-on lid RAL 7035	100x100x50	1SL0946A00	1/60
	100x100x80	1SL0951A00	1/40
	153x110x66	1SL0952A00	1/34
	160x137x77	1SL0954A00*	1/24
	220x170x80	1SL0956A00*	1/12
	310x240x110	1SL0958A00*	1/6

* Can be wall-mounted using wall brackets code M128580000.

Enclosures

IP 44, IP 55 and IP 65 junction boxes in thermoplastic material

IP65

Description	Dimensions HxWxD [mm]	Order code	Box/Pack No items
IP 65 waterproof boxes with plastic 1/4 turn screws - GWT 960 °C			
With smooth sides and high screw-on lid RAL 7035	160x135x150	1SL0960A00	1/16
	220x170x150	1SL0962A00	1/8
	310x240x160	1SL0964A00	1/4

Enclosures

Accessories for IP44, IP55 and IP65 Junction boxes



Metal base plates

Cable Clamps

Conduit clamps

Description	Order code	Box/Pack No items
Metal base plates		
Metal base plate for boxes with dimensions 160x135x77	M009000000	1/10
Metal base plate for boxes with dimensions 220x170x80	M009020000	1/5
Metal base plate for boxes with dimensions 310x240x110	M009040000	1/5
All metal base plates listed above are equipped with fixing screws type 3.5x9.5.		
Cable Clamps - Protection Degree: IP55		
Cable clamp for conduit Ø 20 mm	M009080000	100/1500
Cable clamp for conduit Ø 25 mm	M009100000	100/1000
Cable clamp for conduit Ø 32 mm	M009120000	50/400
Conduit clamps - Box Connector - Protection Degree: IP67		
Conduit clamp Ø 16 mm	M004300000	500/500
Conduit clamp Ø 20 mm	M004310000	300/300
Conduit clamp Ø 25 mm	M004320000	150/150
Conduit clamp Ø 32 mm	M004330000	100/100
Conduit clamp Ø 40 mm	M004340000	50/50
Conduit clamp Ø 50 mm	M004350000	50/50

Europa65 junction boxes

Technical details designed to facilitate installation

Bi-material flanges allow easy entry of cables or conduits

Convenient mounting brackets (optional) on the back side allow to fix the box to the wall in a quick and accurate way

Accessories include base plates or DIN rails to better integrate different types of devices

The front cover is provided with captive-type plastic clamping screws to ensure greater ease of use

Europa65 junction boxes

Technical details designed to facilitate installation

Rigid on one side and bi-material flange on the other to facilitate input of conduits and cables. The flanges are removeable and interchangeable.

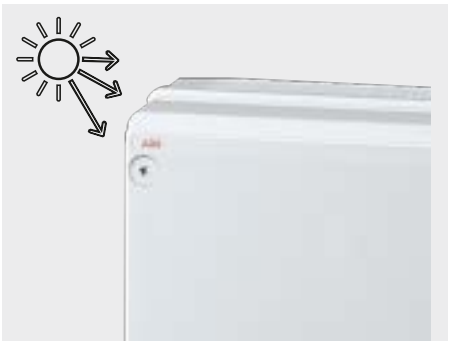

The Polycarbonate GWT 960 ensure unique mechanical performances (Shock resistance IK10) and ensure high resistance against UV rays.

Perfectly symmetrical consumer units with the possibility of attaching the door hinge onto the front (by means of the special articulated screws supplied) on the right or left with 140° opening.

Different type of devices can be installed in an integrated and rational manner thanks to the many accessories such as base plates or a DIN rail.

The frame that can be fitted onto the consumer unit makes semi-flush mounting possible, guaranteeing an attractive finish.

The consumer unit can be fitted with Neutral (N) or Earth (E) terminals, by combining the copper terminal bars to the corresponding plastic terminal holders.

Europa65 junction boxes

Technical characteristics

- protection degree IP 65
- insulation class II ⧈
- available in RAL 7035 grey
- in polycarbonate material, self-extinguishing and resistant to abnormal heat and fire up to 960 °C (glow wire test) in compliance with IEC 60695-2-11 Standard
- installation temperature from -25 °C to +60 °C
- resistant to heat: ball thermopressure up to +125 °C in compliance with EN 60695-10-2 Standard
- rated insulation voltage: 1000 V AC; 1500 V DC
- shock resistance 20 Joules (IK level 10)
- perfectly symmetrical junction boxes with possibility of attaching the lid hinges, (using the special articulated screws supplied) on the right or left with 140° opening
- boxes code 12 808, 12 812, 12 814, 12 816 and 12 818 fitted with one rigid and one bi-material flange for facilitated input of conduits and cables
- junction boxes produced in compliance with CEI 23-49 (1996) + V1 + V2, CB certificate IEC 60670-24 Standards
- boxes are supplied complete with:
- 4 screw-cover caps to guarantee ⧈
- accessories for attaching the hinges on the front
- 1 certification plate
- instruction sheet
- use 3.5x9.5 self-tapping screws to fix the components on the back

Europa65 junction boxes
Order codes

M128040000

M128080020

M128120020

M128140020

M128160020

M128180020

Description	Dimensions WxHxD [mm]	Order code	Packaging
Europa65 junction boxes	140x220x140	M128040000	1/14
Europa65 junction boxes	205x220x140	M128080020	1/9
Europa65 junction boxes	275x220x140	M128120020	1/6
Europa65 junction boxes	275x370x140	M128140020	1/4
Europa65 junction boxes	275x570x140	M128160020	1/2
Europa65 junction boxes	380x570x140	M128180020	1/2

Europa65 junction boxes, accessories

Order codes

Aluminium-plated metal base plates

DIN metal rails

Wall fixing brackets

Spare flanges

Description	For boxes [type]	Order code	Packaging
Base plates			
In aluminium-plated metal	M128040000	M128420000	10/120
	M128080020	M128440000	10/10
	M128120020	M128450000	10/10
	M128140020	M128460000	5/5
	M128160020	M128470000	5/5
	M128180020	M128480000	5/5
DIN metal rails			
Complete with fixing screws	M128040000	M128520000	50/600
	M128080020	M128540000	30/360
	M128120020 M128140020 M128160020	M128550000	50/200
	M128180020	M128560000	50/200
Wall fixing brackets			
In insulated material	-	M128580000	20/240
Spare flanges			
Rigid flange - 8 modules per row	-	1SL0550A00	30/120
Rigid flange - 12 modules per row	-	1SL0551A00	20/80
Rigid flange - 18 modules per row	-	1SL0552A00	20/80

Europa65 junction boxes, accessories

Order codes

Terminal holder

Terminal holder

The construction of the terminal block is completed by combining the terminal holders with the necessary terminal bars, taking care to separate the latter from one another.

Description	For boxes [type]	Order code	Packaging
Terminal holder	M128040000	M125380000	12/360
Terminal holder	M128080020	M125390000	12/360
Terminal holder	M128120020 M128140020 M128160020	M125400000	12/144
Terminal holder	M128180020	M125430000	12/108

Terminal bars

Terminal bars

The terminal bars can be installed on any type of terminal holder; they can be hooked by means of 2 snap-on clips through two additional holes at the ends of the bar itself.

Description No. of holes x Ø holes [mm] + No. of holes x Ø holes [mm]	Order code	Packaging
5x4,5	M125310000	20/240
10x4,5 + 3x5,6	M125320000	20/240
16x4,5 + 3x5,6	M125330000	20/240
15x4,5 + 6x5,6	M125340000	20/240
19x4,5 + 6x5,6	M125350000	20/240

Junction boxes

Flex-o-Box - IP65

Flex-o-Box

Certification / Marking

Features

Flex-o-Box Junior

- Surface-mounted
- 2.5mm² - 500V
- Protection degree: IP65
- Standards: EN/IEC 60670-22
- Color: RAL 7035
- Material meets the glow wire test 650°C
- Halogen-free(1)
- Operating temperature: -5°C to +60°C
- Double insulation
- Mechanical impact strength: IK07

Eight flexible inputs

- 7 x Ø 20 in the side walls
- 1 x Ø 20 in the rear wall
- For flexible cables, max 16mm²
- Tube Ø 16

Dimension drawings

Junior



JB⁶

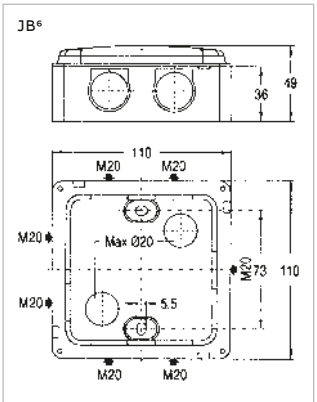

Flex-o-Box JB⁶

- Surface-mounted
- 6mm² – 500V
- Protection degree: IP65
- Standards: EN/IEC 60670-22
- Color: RAL 7035
- Material meets the glow wire test 650°C
- Halogen-free(1)
- Operating temperature: -5°C to +60°C
- Double insulation
- Mechanical impact strength: IK07

Nine flexible inputs

- 7 x M20 in the side walls
- 2 x max. Ø 20 in the bottom rear wall
- For flexible cables, max 16mm²
- Tube Ø 16
- Cable gland M20 (cable length min. 10mm)
- Max torque 2.5Nm, cable up to Ø 8mm

(1) Halogens are not intentionally added and are not expected to be present.

Junction boxes

Flex-o-Box - IP65

Flex-o-Box - Junction boxes

	Description	Type code	Order code	Pcs.
Junior	Junction box 2.5mm²	FOB25MM	4TBB600656C0200	10/100
	Junction box 2.5mm² (60 pieces in red carrying basket)	FOB25BX60	4TBB600669C0200	60
	Junction box 2,5mm² (60pcs in Cardboard box)	FOB25BXN	4TBB555162C0200	60
JB⁶	Junction box 6mm²	FOB6MM	4TBB600651C0200	10/100
	Junction box 6mm² (40 pieces in grey carrying basket)	FOB6BX40	4TBB600676C0200	40
	Junction box 6mm² (40pcs in Cardboard box)	FOB6BXN	4TBB555163C0200	40

Junior and JB⁶ - Accessories

Clamp support with screw terminals

Clamping bracket 6mm² - 500V
With 5 screw clamps.
Connection range per clamp:
6x1.5mm² 3x4mm²
4x2.5mm² 2x6mm²
grey

FOBT6L	4TBB600650C0200	20

Only JB⁶ - Accessories

Product	Type code	Order code	Pcs.
Cable gland M20			
	IP66/IP67 - RAL 7035		
	ACC818293	4TBJ818293C0100	1
Input tulip M20			
	For tube Ø 16 and Ø 20 - RAL7035		
	FOBCGM2	4TBB600346C0200	25
Lid screws (stainless steel)			
	FB6SCR	4TBB600652C0200	40

Junction boxes

Flex-o-Box - IP65

Junction boxes

2.5mm²	Dimension drawing	Description	Color	Type code	Order code	Pcs.
		Supplied with a Clamping bracket of 4 screw terminals. Connection range per clamp: 4 x 1.5mm², 3 x 2.5mm² 2.5mm² - 250 V.	grey	FOB25IV	4TBB600954C0200	15/150
			grey	FOB25GR	4TBB600955C0200	15/150
6-10mm²						
With 7 knockout inputs IP54		The box with captive lid screws comes with 4 cable entry pieces 030/030495-144.	grey	FOB61IP54	4TBB600953C0200	10/100
With 7 bolted inputs IP54		The box of captive lid screws is supplied without Accessories.	grey	FOBSCIP54	4TBB600948C0200	8/80

Junction boxes 6-10mm² - Accessories

Product	Type code	Order code	Pcs.
Clamping bracket 6mm² - 500V			
	With 5 screw clamps Connection range per clamp: 6 x 1.5mm² 3 x 4mm² 4 x 2.5mm² 2 x 6mm² grey		
	FOBT6L	4TBB600650C0200	20

For junction boxes with knockout ports

Cable entry piece			
	Ø 4 to 16mm - grey		
	FOB61CR	4TBB600952C0200	100

Junction boxes

Serie 55 - IP66

Serie 55

Features

Greater mechanical strength, dust and water resistance
- Dust and water resistance IP66/IP67
- Mechanical impact strength: IK07
- Captive seal, foamed and UV-resistant

Easy installation
- Oblong mounting points for correct positioning
- Handy drilling template in every package

Certification / Marking

Greater accessibility when wiring
- Alternatives with terminals in line or corner
- Adequate break-out openings close to the wall surface
- Insert cable without folding it.
- Insert cables via cable gland with lock nut from the sides of the box

Dimension drawings

More options
- Coupling piece for assembly
- Ready for assembly with DIN rail or mounting plate
- Installation of modular devices 68mm under the cover (types 55200 and 55300)
- Set for earthing rail
- With transparent lid (types 55200 and 55300)

Type 55100 - 125x125x75



Type 55200 - 175x175x95



Type 55300 - 225x175x95



▷ M30
⏛ M25
⏚ M32

Junction boxes

Serie 55 - IP66

Type 55100 - 10mm² - IP66-IK07

	Color	Inputs	Description	Type code	Order code	Pcs.
	grey	5xM25	Equipped with clamping bracket SET1MM: 5 cap clamps with maximum connection range 5 x 4mm² / 4 x 6mm² / 3 x 10mm²	SEM551T	4TBS555152C0200	1/16
	grey	5xM25	Empty. Can be equipped with Clamping bracket SET1MM	SE551M	4TBS555151C0200	1/16

Type 55200 - 16mm² - IP66-IK07

	Color	Inputs	Description	Type code	Order code	Pcs.
	grey	6xM25 5xM32	Equipped with clamping bracket SE55T1M: 5 cap clamps with maximum connection range 5 x 6mm² / 4 x 10mm² / 3 x 16mm²	SEM552T	4TBS555154C0200	1/9
	grey	6xM25 5xM32	Empty. Can be equipped with clamping brackets SE55T1M SE55T16M (x5) SE55TS25D (x5) SE55TS25E (x5) SET1MM	SEM552M	4TBS555153C0200	1/9

Type 55300 - 25mm² - IP66-IK07

	Color	Inputs	Description	Type code	Order code	Pcs.
	grey	8xM30 6xM32	Equipped with clamping bracket SE55TS25E (x5): 5 nut clamps with maximum connection range 4 x 16mm² / 3 x 25mm² / 2 x 35mm²	SEM553T25	4TBS555156C0200	1/9
	grey	8xM30 6xM32	Empty. Can be equipped with clamping brackets SE55T1M SE55T16M (x5) SE55TS25D (x5) SE55TS25E (x5)	SEM553EMP	4TBS555155C0200	1/9

Junction boxes

Serie 55 - IP66

Serie 55 - Accessories

Product	Type code	Order code	Pcs.
Clamping bracket 500V - 10mm²			
	With five cap terminals, suitable for Cu or Al connection. Maximum connection range per terminal: 5 x 4mm² / 4 x 6mm² / 3 x 10mm². Can be placed in types 55100 and 55200.		
	SET1MM	4TBS600516C0200	1/6
Clamping bracket 500V - 16mm²			
	With five cap terminals, suitable for Cu or Al connection. Maximum connection range per clamp: 5 x 6mm² / 4 x 10mm² / 3 x 16mm². Can be placed in types 55200 and 55300.		
	SE55T1M	4TBS600525C0200	1/6
Clamping bracket 500V - 16mm²			
	With one nut clamp (single pressure set) suitable for Cu or Al connection. Maximum connection range per clamp: 5 x 6mm² / 4 x 10mm² / 3 x 16mm². Can be placed in types 55200 and 55300.		
	SE55T16M	4TBS600526C0200	1/24
Clamping bracket 500V - 25mm²			
	With one nut clamp (single pressure set) suitable for Cu or Al connection. Maximum connection range per clamp: 4 x 16mm² / 3 x 25mm² / 2 x 35mm². Can be placed in types 55200 and 55300.		
	SE55TS25E	4TBS600544C0200	1/24
Clamping bracket 500V - 25mm²			
	With a nut clamp (double pressure set) suitable for Cu or Al connection. Maximum connection range per clamp: 4 x 16mm² / 3 x 25mm² / 2 x 35mm². Can be placed in types 55200 and 55300.		
	SE55TS25D	4TBS600545C0200	1/24
Insulation cap			
	Suitable for clamping brackets 034/055216-101, 034/055325-100 and 034/055325-101		
	ACC890838	4TBC890838C0100	48

Product	Type code	Order code	Pcs.
Connector			
	Set of 2 pieces. Dimension PG21 Combination possible between types 55200 and 55300.		
	FOR150C	4TBR610327C0200	1
Universal inputs			
	Ø max. cable 18, Ø drill 23mm, PG16. Grey.		
	FORJRPG16	4TBR610130C0200	25
	Ø max. cable 24, Ø drill 29mm, PG21. Grey.		
	FORJRPG21	4TBR610132C0200	25
	Ø max. cable 32, Ø drill 38mm, PG29. Grey.		
	FORJRPG29	4TBR610133C0200	25

Junction boxes

Serie 55 - IP66

Serie 55 - Accessories

Product	Type code	Order code	Pcs.
DIN-rails			
	Set of DIN rail with 2 mounting screws		
	SEDIN144	4TBS600521C0200	1
	Length = 144mm, for type 55200 and short side of type 55300		
	SEDIN192	4TBS600537C0200	1
	Length = 192mm, for type 55300		
Set for earthing rail			
	Set for earthing rail (011/029200-035) support strip, spacers and 2 mounting screws		
	SEPESUP1	4TBS600522C0200	1
	For type 55200 and short side of type 55300		
	SEPESUP2	4TBS600538C0200	1
	For type 55300		

Product	Type code	Order code	Pcs.
Cover plates			
	Set of one cover plate (no mounting screws required)		
	SECP8MD2	4TBS600519C0200	1
	8 modules for type 55200		
	SECP8MD3	4TBS600535C0200	1
	8 modules for type 55300, short side		
	SECP1MD3	4TBS600534C0200	1
	10 modules for type 55300, long side		
Mounting plate			
	Aluminium plate for type 55300		
	SE553MP	4TBS600536C0200	1

Notes

NEMA
STANDARD PRODUCTS

Electrical installation solutions for buildings
NEMA Standard Products

Index

NEMA Flow Goods products 2
Residential Surge Protection 3
THOMESURGE(P)
Residential Surge Protection Device 4
SurgePro™ Surge Protective Device (SPD) 5
Low voltage general purpose
dry type transformers 8

Overview
Large power transformers 9

General purpose DOE 2016 efficiency
Applicable standards 12
Single-phase, and NRCan efficiency 13
Three-phase catalog number nomenclature 14
Three-phase, aluminum coil 16
Three-phase, copper coil 17

K-factor DOE 2016 efficiency, shielded
Three-phase, aluminum coil 18
Three-phase, copper coil 20

K-factor low noise DOE 2016 efficiency, shielded
Three-phase, aluminum coil 24
Three-phase, copper coil 26

Low noise, DOE 2016 efficiency
Three-phase, aluminum coil 27
Three-phase, copper coil 28

Noise isolation-Guard I™ DOE 2016 efficiency shielded
Three-phase, aluminum coil 29
Three-phase, copper coil 30

Noise isolation-Guard II™ DOE 2016 efficiency, shielded
Three-phase, aluminum coil 31
Three-phase, copper coil 32

Harmonic mitigating-Guard III™ DOE 2016 efficiency shielded
10A-29 Three-phase, copper coil 33
Servicenter™ mini-unit substations –
Integral transformer and distribution center 34
Single-phase and three-phase
DOE 2016 efficiency 35
Outlines, dimensions, wiring diagrams 36

Totally enclosed, nonventilated – tenv
Aluminum and copper NEMA TP-1 efficiency 37

Midtapped
Aluminum DOE 2016 efficiency 39
Copper DOE 2016 efficiency 41

Drive isolation
Three-phase 42
Accessories and lugs Enclosure parts 44
Wiring diagrams 47
Dimensions 51

Overview
General and technical information 54

Open core and coil transformers
Machine tool applications 56
Control 58
Options and fusing guide 59
CE-rated 60
Ordering table 61
Technical data 62
Accessories 63
Wiring diagrams 64
Weights and dimensions 65

Encapsulated type QB
General purpose single-phase NEMA 3R 66
Buck-Boost autotransformers 69
Dimensions and wiring diagrams 71

Encapsulated type QMS
General purpose single-phase NEMA 3R 72
Dimensions and wiring diagrams 73

We will need to add a note the pictures are typical and not exact breaker/receptacle configuration for each picture.

NEMA Flow Goods products

Thank you for your interest in NEMA Flow Goods products! Our offering consists of load centers, circuits breakers, surge protection devices and modular metering, which are sold primarily in the United States. In order to provide you with the most accurate and up to date information, we have provided the links below to our US catalog

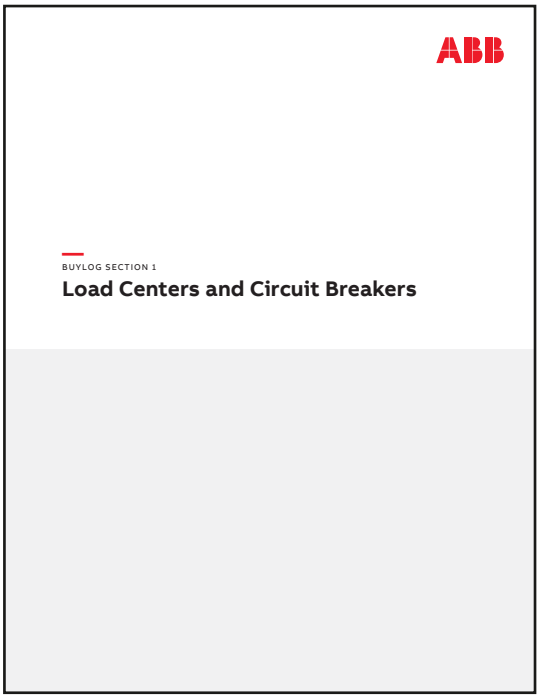

US Catalog
Load Centers, Circuit Breakers and Surge Protection

Visit our website

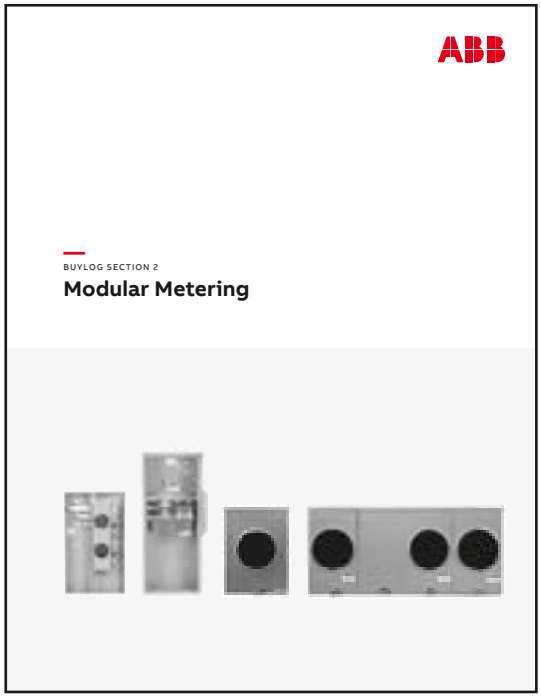

US Catalog
Modular Metering

Visit our website

Residential Surge Protection

Externally Mounted Surge Devices and Internally Mounted Surge Devices

Introduction

ABB offers a series of residential surge protection devices that can be installed inside or outside of the home's electrical panel and offer superior protection for sensitive electronics.

All residential surge protection devices are UL listed, designed for 120/240V applications and meet the NEC 2023.

THOMESURGE

The THOMESURGE is a Type 1 SPD designed for service entrance or subpanel locations and provides surge protection for the entire home or office.
The THOMESURGE is a cost effective surge solution that can be installed with any manufacturer's panel.

Visit our website

https://new.abb.com/low-voltage/products/surge-protective-devices/thomesurge

THQLSURGE2

The THQLSURGE2 is a Type 1 SPD designed for service entrance or subpanel locations and provides surge protection for the entire home or office.
The THQLSURGE2 conveniently connects inside the GE/ABB PowerMark Gold & Pro load center, providing surge protection for the entire panel and all attached loads.

Visit our website

https://electrification.us.abb.com/products/surge-protective-devices/thqlsurge2-surge-protective-device

THOMESURGE(P)

Residential Surge Protection Device

Features:

- 36 kA per Phase
- UL 1449 Listed
- 10 kA I-nominal Rating
- 200 kA SCCR
- Meets NEC 2023 Requirements

Product Specifications

General Specifications	
Maximum Surge Current	36 kA per Phase
UL Type Designation	Type 1
UL 1449 I-nominal Rating	10 kA
UL 1449 Short Circuit Current Rating	65 kA

Design Specifications
Custom MOV design for High Energy Handling in Category C locations
Thermally Protected MOVs
External Parallel Connected for Mounting next to Electrical Gear
Reduced Mode of Protection (L1-N, L2-N)

Diagnostic & Status Monitoring Specifications
LED Protection Status Monitoring (Single LED Standard)

Enclosure
Polycarbonate 4.25” × 2.41” × 2.75”
Lid ultrasonically sealed
NEMA 4X
1/2 inch NPT Side Mount Nipple

Filtering
NO

Technical data	
Humidity Range	0 – 95% non-condensing
Operating Frequency	50 – 60 Hz
Operating Temperature	–35°C to +85°C
Typical Connection	18” #12 AWG (pre-wired pig tails)

UL 1449 Performance Data						
System Voltage	L-N	L-G	N-G	L-L	SCCR	MCOV
240/120V Split Ø	700	–	–	1200	200 kA	180

Standards Compliance & Certifications

UL 1449 5th Edition: 2023, cULus, (UL File: VZCA.E316468), ANSI/IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, NEC Article 285
ISO 9001: 2014 Quality Management System, ISO 17025:2007 Laboratory Certification (UL DAP Program) Compliance with RoHS, REACH & California Prop 65.
100% Quality Tested prior to shipping

Wiring Configuration

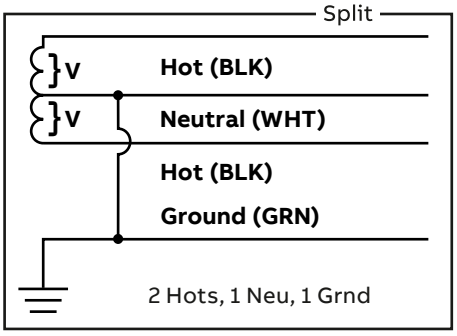

Size and Mechanical Specifications

Dimensions	4.25” × 2.41” × 2.75”
Weight	0.46 lbs
Enclosure Type	Polycarbonate NEMA 4X
Installation Type	Indoor / Outdoor
Mounting Method	Flush / Flange / Through-hole

Product Diagram

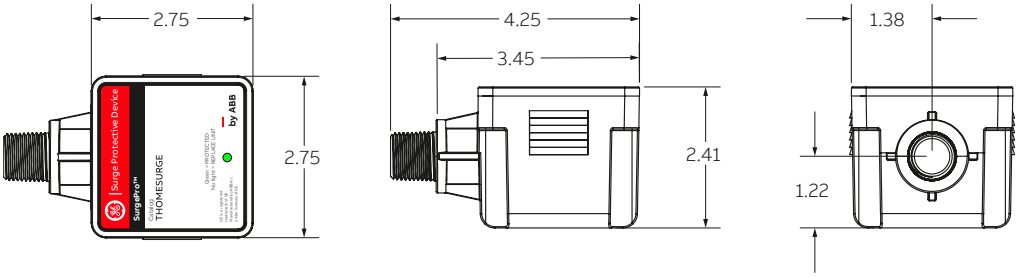

SurgePro™

Surge Protective Device (SPD)

This surge protective device is designed to be used on electrical systems that are 120/240 or 120/208 V AC.

⚠ WARNING

- Risk of shock, disconnect power before installation.
- SPD should be installed by a qualified electrician in accordance with national and local electrical codes.
- Hazardous voltages exist within SPDs when energized — SPDs should never be installed or serviced when energized. During installation into an electrical system, the SPD must not be energized until the electrical system is completely installed, inspected and tested.
- Use appropriate safety precautions including personal protection equipment.
- Do not HIPOT the SPD unit or the electrical system in which the SPD unit is connected without disconnecting the SPD unit's conductors, including phase, neutral and ground.
- Cannot be used on ungrounded systems.
- The voltage rating of the SPD and system must be verified before energizing the SPD.
- Failure to follow these instructions can result in death, serious injury and/or equipment damage.
- This manual shall be read in its entirety prior to installing.

Pre-plan your installation

- Meet all national and local codes. (NEC Article 242 addresses SPDs.)
- Mount SPD as close to panel or equipment as possible to keep leads short. Ensure leads are as short and straight as possible, including neutral and ground.
- Consider a breaker position that is closest to the SPD and the panel's neutral and ground.
- Suggested breaker size is 20 A 2-pole breaker.
- Short circuit current rating (SCCR) 200 kA.
- Make sure system is grounded per NEC and clear of faults before energizing SPD.

Installation instructions

1. Use a voltmeter to check all voltages to ensure compatibility with SPD.
2. Remove power from panel. Confirm panel is de-energized by using a voltmeter.
3. Identify connection/breaker location and SPD location.
4. Remove an appropriately sized knockout from panel.
5. Mount SPD. Connect to equipment using an approved wiring method, including seals appropriate for the enclosure rating.
6. Connect conductors as appropriate — short and straight as possible.

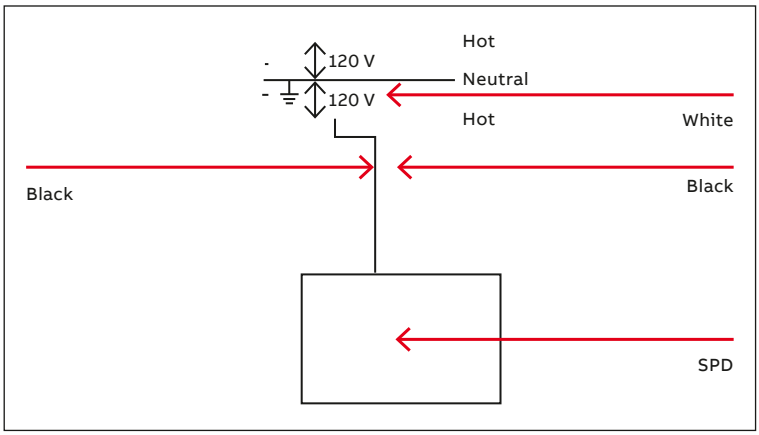

7. Label or mark conductors as appropriate — energized — black: neutral — white.
8. Make sure system is bonded per NEC and is clear of hazards or faults before energizing (N-G bonding not per NEC is the #1 cause of SPD failures).
9. Apply power to the panel.
10. Verify that the status indication light on the face of the SPD is illuminated. If the light is not on, remove the power supplying the panel and review all the previous installation procedures.

SurgePro™

Surge Protective Device (SPD)

The above picture is an example of a typical load center, the location of the neutral bar may vary.

The unit contains no serviceable parts.

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation operation or maintenance. Should further information be desired, or should problems arise which are not covered sufficiently for the purchaser's purpose, the matter should be referred to ABB Inc.

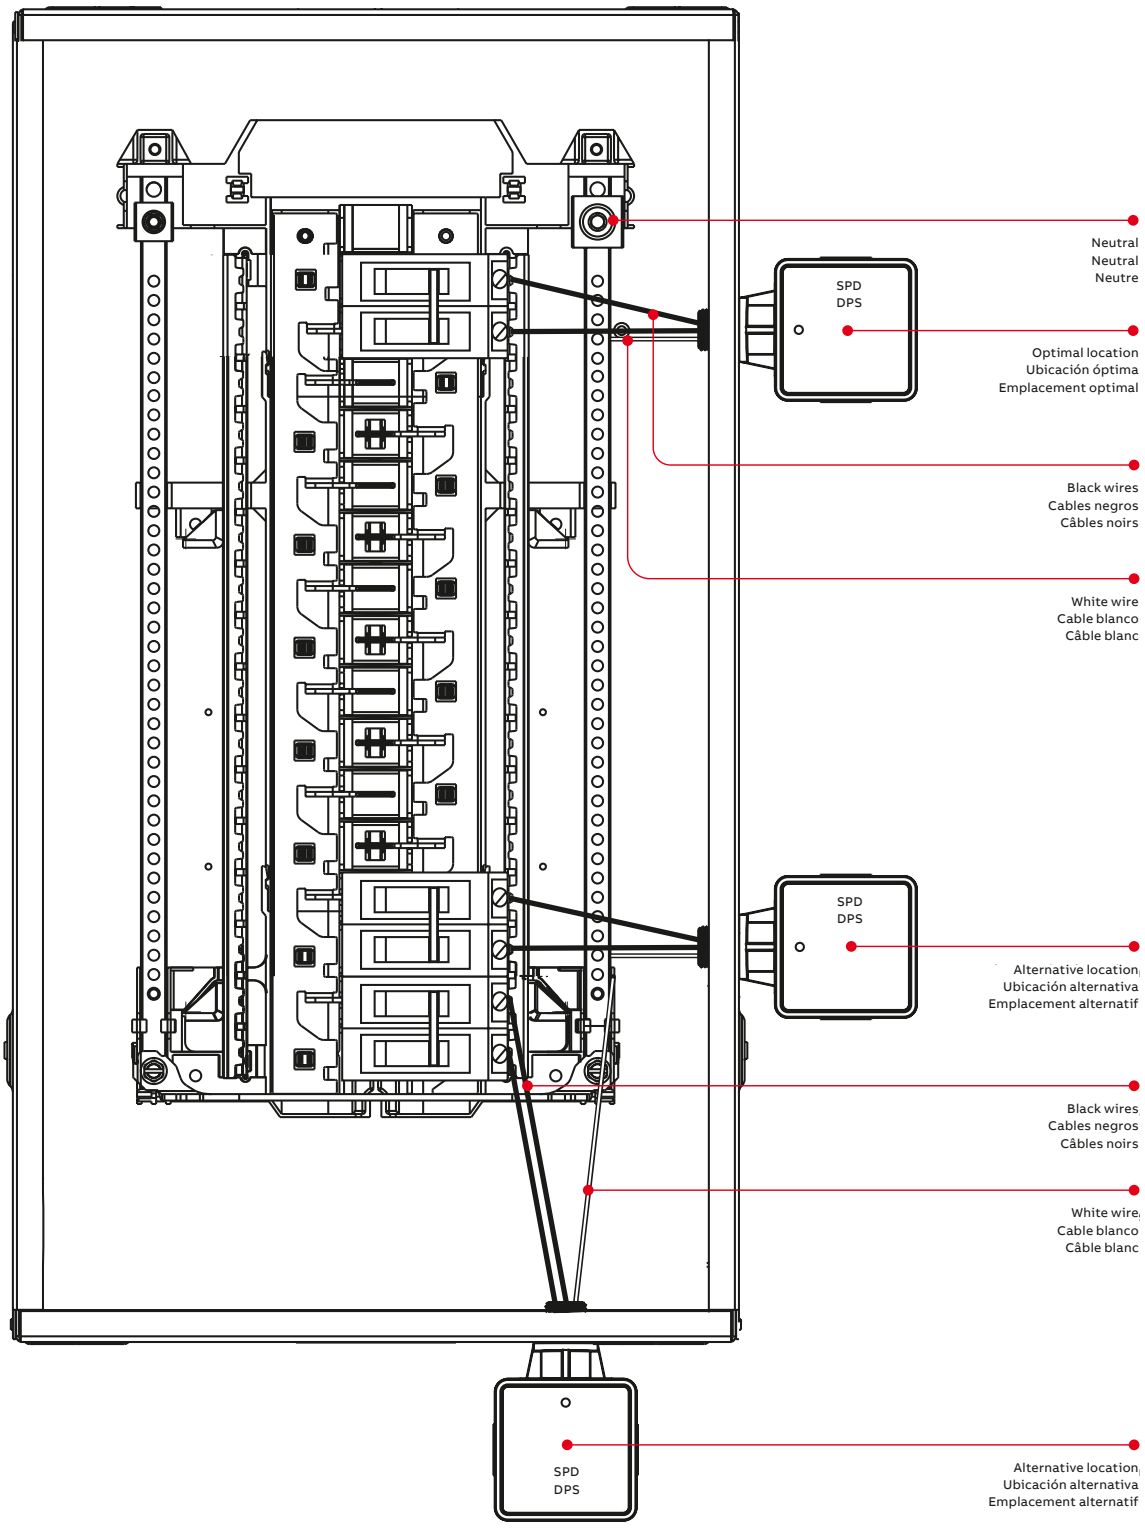

SurgePro™

AC power surge protective device

Benefits

- AC power surge protective device for the entire home or office – computers, TV, appliances and all other sensitive electronic equipment
- Mitigates against surge damage caused by lightning and utility switching events
- Installs in your ABB PowerMark™ load center (the best location for protecting all AC circuits in your home) directly onto the bus
- Up to 50,000 amps of surge protective strength
- Meets newest UL 1449 5th edition surge protection requirements
- 3-year, $25,000 connected equipment warranty (from date of purchase) when installed according to NEC electrical and safety codes on cULus approved equipment
- Can be installed to meet NEC 2023 Art. 230.67 SPD requirements for dwelling units at or adjacent to service entrances.

Product features

- Single phase, three wire, 120/240 VAC, 25 kA per phase rated
- UL 1449 5th edition listed (VZCA:E316636 and VZCA7:E316636) as a Type 1 SPD with a 100 kA SCCR rating
- Monolithic, high energy metal oxide varistors per mode with integral thermal and overcurrent protection
- Illuminated LED indicates proper function of protective elements

Technical data

The THQLSURGE2 is designed for service entrance or subpanel locations. It provides small, easy to install surge protection for the entire home or office. The surge protective device consists of monolithic, high energy metal oxide varistors per mode with integral thermal and overcurrent protection. An illuminated LED indicates the proper function of the protective elements. The THQLSURGE2 conveniently connects inside the GE PowerMark load center, directly onto the bus, like a circuit breaker, providing surge protective elements for the entire panel and all attached loads.

Catalog number	Per mode surge current rating[2]	System voltage 50/60 Hz	Transient energy rating, 10/1000 µS, total	Nominal discharge current In	Configuration	UL 1449 4th edition Voltage Protection Rating (VPR)			
						L-N	N-G	L-G	L-L
THQLSURGE2	25 kA	120/240 V	1520 J	10 kA	1 ph 3 wire	600 V	–	–	1000 V

[1] Total surge rating is defined as the maximum surge current in the entire device for a single pulse 8/20µS
[2] Per mode defined as varistor surge current, single pulse 8/20µS

THQLSURGE2

- Up to 225 amp load centers
- SCCR to 100 kA
- For use in GE load centers
- Can be used to meet NEC® 2023 Art. 230.67

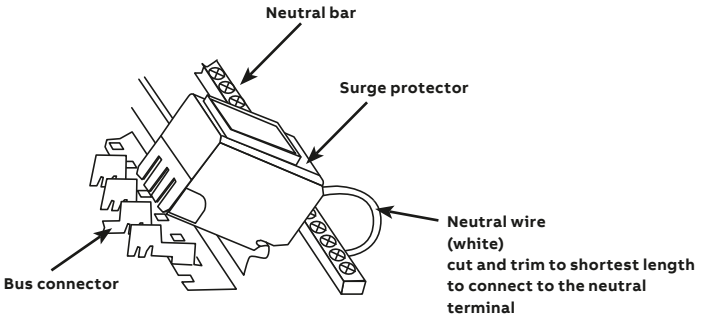

Low voltage general purpose dry type transformers

Single phase and three phase; 600 volts and below

Overview

		Low Voltage Dry Type Vented Transformers				
		General Purpose Phase 1	**General Purpose Phase 3**	**Guard I™**	**Guard II™**	**Guard III™**
Application		General purpose lighting and electrical installations, Motors, Resistance heating, Motor generators (without solid state drives), Airports	General purpose lighting and electrical installations, Motors, Resistance heating, Motor generators (without solid state drives), Airports	Data centers, Critical care, Office buildings, Lighting circuits	Data centers, Critical care, Hospitals	Data centers, Critical care, Hospitals, Schools, Museums, Casinos, Gaming facilities
Electrostatic shields		–	–	■	■	■
Noise isolation		–	–	■	■	–
Harmonic mitigating		–	–	–	–	■
Surge suppression		–	–	–	■	–
Integrated load center and circuit breakers		–	–	–	–	–
Phase	1	■	–	–	–	–
	3	–	■	■	■	■
kVA, max		100	300	750	112.5	300
Primary voltage		240 x 480	480	480	480	480
Secondary voltage, 3-wire		120/240 V	208Y/120 V	208Y/120 V	208Y/120 V	208Y/120 V
Frequency		60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
Windings	Aluminum (AL)	■	■	■	■	–
	Copper (CU)	■	■	■	■	■
Temperature rise		150 °C	80 °C, 115 °C, 150 °C	80 °C, 115 °C, 150 °C	80 °C, 115 °C, 150 °C	150 °C
Audible sound level (dB) NEMA ST-20 std		Meets or exceeds NEMA ST-20	Meets or exceeds NEMA ST-20	Meets or exceeds NEMA ST-20	Meets or exceeds NEMA ST-20	Meets or exceeds NEMA ST-20
Seismic qualification		CBC 2022 and IBC 2021	CBC 2022 and IBC 2021	CBC 2022 and IBC 2021	CBC 2022 and IBC 2021	CBC 2022 and IBC 2021
Enclosure	NEMA 2	■	■	■	■	■
	Optional rain shield kit: NEMA 3R	■	■	■	■	■
Accessible mounting feet		■	■	■	■	–

■ Applicable
– N/A

Overview

		Low Voltage Dry Type Vented Transformers			
		K-Factor	**Low audible noise**	**Midtapped**	**Drive Isolation**
Application		Non-linear loads, Motors	Office buildings, Hospitals, Schools, Museums, Libraries	Office buildings	Silicon controlled rectified (SCR) control circuitry in adjustable speed drives, Elevators, Escalators, People movers
Electrostatic shields		■	–	–	–
Noise isolation		–	–	–	–
Harmonic mitigating		–	–	–	–
Surge suppression		–	–	–	–
Integrated load center and circuit breakers		–	–	–	–
Phase	1	–	–	–	–
	3	■	■	■	■
kVA, max		300	500	500	220
Primary voltage		480	480	480	575
Secondary voltage, 3-wire		208Y/120 V	208Y/120 V	240/120 V	460Y/266 V[2]
Frequency		60 Hz	60 Hz	60 Hz	60 Hz
Windings	Aluminum (AL)	■	■	■	■
	Copper (CU)	■	■	■	–
Temperature rise		80 °C, 115 °C, 150 °C	80 °C, 115 °C, 150 °C	80 °C, 115 °C, 150 °C	150 °C
Audible sound level (dB) NEMA ST-20 std		Meets or exceeds NEMA ST-20	Exceeds NEMA ST-20	Meets or exceeds NEMA ST-20	Meets or exceeds NEMA ST-20
Seismic qualification		CBC 2022 and IBC 2021	CBC 2022 and IBC 2021	CBC 2022 and IBC 2021	CBC 2022 and IBC 2021
Enclosure	NEMA 2	■	■	■	■
	Optional rain shield kit: NEMA 3R	■	■	■	■
Accessible mounting feet		■	■	■	■

[2]See product pages for additional list of voltage variations

■ Applicable
– N/A

Overview

		Low Voltage Dry Type Non-Ventilated Transformers	Servicenter™ Integrated Transformer and Distribution Panel	
		Totally Enclosed, Non-Ventilated (TENV)	Three Phase Servicenter™ Integrated Transformer and Distribution Panel	Single Phase Servicenter™ Integrated Transformer and Distribution Panel
Application		Textile, Automotive	Industrial, remote installation sites, Office buildings, Parking lots, Assembly lines	Industrial, remote installation sites, Office buildings, Parking lots, Assembly lines
Electrostatic shields		–	–	–
Noise isolation		–	–	–
Harmonic mitigating		–	–	–
Surge suppression		–	–	–
Integrated load center and circuit breakers		–	■	■
Phase	1	–	–	■
	3	■	■	–
kVA, max		75	30	25
Primary voltage		480	480	480
Secondary voltage, 3-wire		208Y/120 V	208Y/120 V	208Y/120 V
Frequency		60 Hz	60 Hz	60 Hz
Windings	Aluminum (AL)	■	■	■
	Copper (CU)	■	■	–
Temperature rise		80 °C, 115 °C, 150 °C	150 °C	115 °C
Audible sound level (dB) NEMA ST-20 std		Meets or exceeds NEMA ST-20	Meets or exceeds NEMA ST-20	Meets or exceeds NEMA ST-20
Seismic qualification		CBC 2022 and IBC 2021	CBC 2022 and IBC 2021	CBC 2022 and IBC 2021
Enclosure	NEMA 2	–	■	■
	Optional rain shield kit	–	■	–
	NEMA 3R	■	■	■
Accessible mounting feet		■	■	–

■ Applicable
– N/A

General purpose

Product overview - one phase

Type QL Transformer

ABB's general purpose single-phase dry type transformers are step-down transformers designed for installations that require a 3-wire secondary voltage for 120/240 V systems. These units can also be used in 2-wire, 120x240 V applications. Their primary voltages are 240x480.

Optional wall mount brackets are available for most models. Lug kit and copper ground bar are included.

Features

- Connection: 3-wire or 2-wire secondaries
- Voltages: (P) 240x480 (S) 120/240
- Temperature rise: 150 °C; 220 (R) insulation class; IEC 60085 Class R
- Frequency: 60 Hz
- Ambient temperature: 40 °C
- Standard single-phase tap arrangement
- Painted, ANSI #61 gray NEMA 2 enclosure
- Type QL
- Audible sound level: NEMA ST-20 Standard
- Seismic qualifications – CBC 2022 and IBC 2021; ASCE 7.05-2016
- UL 1561
- UL & cUL listed (XQNX, XQNX7:E323777)
- Energy efficiency: DOE 2016 (10 CFR Part 431)
- Energy efficiency: NRCan (CSA 802.2)
- UL energy verification – for US and Canada (ZXPC:EV519886) (ZZED:EV23760)

General purpose

Aluminum windings 150 °C rise NEMA 2

Primary voltage	Secondary voltage	kVA	Taps (FCBN,FCAN; %)	Product net weight (lbs.)	Frame size	Ordering code
240 x 480 Volts	120 / 240 Volts	15	(-4,+2: 2.5%)	320	YX171	9T33A2670
		25	(-4,+2: 2.5%)	320	YX171	9T33A2671
		37.5	(-4,+2: 2.5%)	460	YX172	9T33A2672
		50	(-4,+2: 2.5%)	490	XV173	9T33A2673
		75	(-4,+2: 2.5%)	600	YX174	9T33A2674
		100	(-4,+2: 2.5%)	950	YX175	9T33A2675

Copper windings 150 °C rise NEMA 2

Primary voltage	Secondary voltage	kVA	Taps (FCBN,FCAN; %)	Product net weight (lbs.)	Frame size	Ordering code
240 x 480 Volts	120 / 240 Volts	15	(-4,+2: 2.5%)	350	YX171	9T33C2670
		25	(-4,+2: 2.5%)	350	YX171	9T33C2671
		37.5	(-4,+2: 2.5%)	510	YX172	9T33C2672
		50	(-4,+2: 2.5%)	500	XV173	9T33C2673
		75	(-4,+2: 2.5%)	750	YX174	9T33C2674

General purpose

Product overview - three-phase

Type QL Transformer

ABB low voltage dry type transformers are designed to give you what you want, when you want it. These transformers have outward facing feet for faster installation, easy off front and back panel for rapid service access, and ground and lug kits included on most units up to 150 kVA; more value for your money.

Features

- Unique core and coil design using grain-oriented silicon steel
- Core and coil assemblies mounted on rubber isolation pads
- Single piece front/back
- Outward-facing feet
- Lifting eyes provided in top clamp
- Lug kit included up through 150kVA
- Copper ground bar kit included up through 150kVA
- Copper ground strap

Ordering code construction

9T	1	0	A	100	1	G31

ABB standard

1 = QL DOE 2016 design

Transformer type

0 = Standard, K1
1 = K13
2 = K20
4 = K4
7 = Guard II/servicenter
8 = Spare parts

Options

A = Aluminum coil
B[1] = Aluminum C&C (no enclosure)
C = Copper coil
S = AL stainless steel enclosure
V[1] = Copper C&C (no enclosure)
Z = CU stainless steel enclosure
Y = Accessories

[1]These options are UL recognized components.

kVA rating

1 = 15 kVA
2 = 30 kVA
3 = 45 kVA
4 = 75 kVA
5 = 112.5 kVA
6 = 150 kVA
7 = 225 kVA
8 = 300 kVA
9 = 500 kVA

Note: 750 kVA available

Voltage series

See voltage chart on the next page

Core & coil characteristics	Catalog no. suffix codes Core & coil temp rise 150 °C	115 °C	80 °C
Temp rise rating only	G01 or blank	G31	G61
-3 dB noise reduction	G02	G32	G62
Electrostatic shield*	G03	G33	G63
-3 dB noise reduction + electrostatic shield	G04	G34	G64
-5 dB noise reduction	G05	G35	G65
-5 dB noise reduction + electrostatic shield	G06	G36	G66

* An Electrostatic Shield (a Guard I transformer) is bonded to the ground terminal and is a copper barrier between the primary and secondary windings to reduce electrical noise. All K-factor transformers come standard with an Electrostatic Shield (K4, K13, K20).

Please Note: This Ordering code nomenclature is for illustrative purposes only. Not all Ordering code combinations are available for production. Please reference the ordering tables beginning on page 5-12 for Three-phase DOE 2016 Efficiency transformers currently available for ordering. For additional assistance, please contact Customer Service at 1-800-431-7867.

General purpose

Three-phase

Three-phase common voltages

Series	Primary Voltage	Secondary Voltage
100	480	208Y/120
101	480	220
102	480	220Y/127
103	480	208
104	480	230Y/133
105	480	240Y/139
106	480	380
107	480	380Y/219
108	480	400Y/231
109	480	415Y/240
110	480	480
111	480	575
112	480	600
113	480	440Y/254
114	480	600Y/346
115	480	440
116	480	230/115
117	480	480Y/277
118	480	240/120
119	480	240
121	480	220/110
123	480	400
124	480	460
125	480	420
126	480	230
127	480	575Y/332
129	480	460Y/266
131	208	240
132	208	240/120
133	208	480
134	208	480Y/277
135	208	380Y/219
136	208	230
137	208	575
138	208	460
139	208	400Y/231
140	208	208
141	208	230Y/133
142	208	380
143	208	220/110
144	208	220Y/127
145	208	208Y/120
146	208	400
147	208	315
148	208	600
149	208	460Y/266
150	208	220
151	208	230/115
152	208	415Y/240
153	240	480Y/277
154	240	480
155	240	400Y/231

Three-phase common voltages

Series	Primary Voltage	Secondary Voltage
157	240	575
158	240	460Y/266
159	240	240Y/139
160	240	600
161	240	208Y/120
162	240	380
163	240	440
164	240	240/120
165	240	380Y/219
166	220	380Y/219
167	220	400Y/231
168	220	240Y/139
169	220	220
170	220	208Y/120
171	220	480Y/277
172	220	440Y/254
173	220	480/240
174	220	480
175	220	415Y/240
176	380	220Y/127
177	380	480
178	380	220
179	380	208Y/120
180	380	415Y/240
181	380	240/120
184	380	480Y/277
185	380	380Y/219
186	380	230Y/133
187	380	240
188	440	220Y/127
189	440	480
190	440	208Y/120
191	440	380
192	440	380Y/219
193	440	400Y/231
194	440	575Y/332
195	440	240/120
196	440	480Y/277
197	440	240
198	230	460
199	230	400Y/231
200	230	400
201	230	480Y/277
202	230	208Y/120
203	230	480
204	400	230Y/133
205	400	380Y/219
206	400	480
207	400	220Y/127
209	400	400Y/231
210	400	208Y/120
211	400	208Y/120

Three-phase common voltages

Series	Primary Voltage	Secondary Voltage
212	400	480Y/277
213	415	208Y/120
214	415	460
215	415	220Y/127
216	416	208Y/120
217	416	480Y/277
218	460	208Y/120
219	460	220
221	460	400Y/231
222	460	220Y/127
223	460	230
224	460	575Y/332
225	460	230Y/133
226	460	460Y/266
227	550	208Y/120
228	550	480Y/277
229	575	208Y/120
230	575	480Y/277
231	575	240Y/139
232	575	460
233	575	480
234	575	230Y/133
235	575	230
236	600	240/120
237	600	480
238	600	480Y/277
239	600	240
240	600	208Y/120
241	600	230Y/133
242	600	240Y/139
243	600	208
244	600	600Y/346
245	690	400Y/231
246	690	208Y/120
247	277	415Y/240
248	315	208Y/120
249	320	480Y/277
250	420	480Y/277
251	490	480Y/277
252	500	480Y/277

General purpose

K = 1 150°C Rise NEMA 2 aluminum coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1001
		30	(+2, -4: 2.5%)	330	UY72A	9T10A1002
		45	(+2, -4: 2.5%)	444	UY03A	9T10A1003
		75	(+2, -4: 2.5%)	561	UY14A	9T10A1004
		112.5	(+2, -4: 2.5%)	680	DY05A	9T10A1005
		150	(+2, -4: 2.5%)	1030	DY76A	9T10A1006
		225	(+2, -4: 2.5%)	1450	DY17A	9T10A1007
		300	(+2, -4: 2.5%)	1670	DY08A	9T10A1008
		500	(+2, -2: 2.5%)	2900	DY79A	9T10A1009
		750	(+2, -2: 2.5%)	4292	DY67A	9T10A1302

K = 1 115°C Rise NEMA 2 aluminum coil three-phase

Input Voltage	Output Voltage	kVA	Taps	Approx. Net Weight (Lbs)	Frame Size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1001G31
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1002G31
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1003G31
		75	(+2, -4: 2.5%)	603	UX74A	9T10A1004G31
		112.5	(+2, -4: 2.5%)	830	DX75A	9T10A1005G31
		150	(+2, -4: 2.5%)	1250	DX76A	9T10A1006G31
		225	(+2, -4: 2.5%)	1670	DX77A	9T10A1007G31
		300	(+2, -4: 2.5%)	1985	DX78A	9T10A1008G31
		500	(+2, -2: 2.5%)	2900	DX79A	9T10A1009G31

K = 1 80°C Rise NEMA 2 aluminum coil three-phase

Input Voltage	Output Voltage	kVA	Taps	Approx. Net Weight (Lbs)	Frame Size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	330	UY72A	9T10A1001G61
		30	(+2, -4: 2.5%)	444	UY03A	9T10A1002G61
		45	(+2, -4: 2.5%)	561	UY74A	9T10A1003G61
		75	(+2, -4: 2.5%)	680	DY05A	9T10A1004G61
		112.5	(+2, -4: 2.5%)	1030	DY76A	9T10A1005G61
		150	(+2, -4: 2.5%)	1450	DY17A	9T10A1006G61
		225	(+2, -4: 2.5%)	1985	DX78A	9T10A1007G61
		300	(+2, -2: 2.5%)	2900	DY79A	9T10A1008G61
		500	(+2, -2: 2.5%)	-	DX67A	9T10A1009G61

K = 1 150°C Rise NEMA 2 aluminum coil three-phase

Input Voltage	Output Voltage	kVA	Taps	Approx. Net Weight (Lbs)	Frame Size	Ordering code
208 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1451
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1452
		45	(+2, -4: 2.5%)	561	UY74A	9T10A1453
		75	(+2, -4: 2.5%)	680	DY75A	9T10A1454
		112.5	(+2, -4: 2.5%)	1030	DY76A	9T10A1455
		150	(+2, -4: 2.5%)	1250	DX76A	9T10A1456
		225	(+2, -4: 2.5%)	1670	DY78A	9T10A1457
		300	(+2, -2: 2.5%)	2900	DX79A	9T10A1458

General purpose

K = 1 150°C Rise NEMA 2 aluminum coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
208 Volts Delta	480Y/277 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1341
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1342
		45	(+2, -4: 2.5%)	561	UY74A	9T10A1343
		75	(+2, -4: 2.5%)	680	UY74A	9T10A1344
		112.5	(+2, -4: 2.5%)	1030	DY76A	9T10A1345
		150	(+2, -4: 2.5%)	1250	DX76A	9T10A1346
		225	(+2, -4: 2.5%)	1670	DY78A	9T10A1347
		300	(+2, -2: 2.5%)	2900	DX79A	9T10A1348

K = 1 150°C Rise NEMA 2 aluminum coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
240 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1611
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1612
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1613
		75	(+2, -4: 2.5%)	561	UY74A	9T10A1614
		112.5	(+2, -4: 2.5%)	680	DY75A	9T10A1615
		150	(+2, -4: 2.5%)	1030	DY76A	9T10A1616
		225	(+2, -4: 2.5%)	1450	DY77A	9T10A1617
		300	(+2, -4: 2.5%)	1670	DY78A	9T10A1618
		500	(+2, -2: 2.5%)	2900	DX79A	9T10A1619

K = 1 150°C Rise NEMA 2 aluminum coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
240 Volts Delta	480Y/277 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1531
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1532
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1533
		75	(+2, -4: 2.5%)	561	UY74A	9T10A1534
		112.5	(+2, -4: 2.5%)	680	DY75A	9T10A1535
		150	(+2, -4: 2.5%)	1030	DY76A	9T10A1536
		225	(+2, -4: 2.5%)	1450	DY77A	9T10A1537
		300	(+2, -4: 2.5%)	1670	DY78A	9T10A1538
		500	(+2, -2: 2.5%)	2900	DX79A	9T10A1539

K = 1 150°C Rise NEMA 2 aluminum coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	240/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1181
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1182
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1183
		75	(+2, -4: 2.5%)	561	UY74A	9T10A1184
		112.5	(+2, -4: 2.5%)	830	DX75A	9T10A1185
		150	(+2, -4: 2.5%)	1030	DY76A	9T10A1186
		225	(+2, -4: 2.5%)	1450	DY77A	9T10A1187
		300	(+2, -4: 2.5%)	1670	DY78A	9T10A1188
		500	(+2, -2: 2.5%)	2900	DX79A	9T10A1189

K = 1 150°C Rise NEMA 2 aluminum coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	480Y/277 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1171
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1172
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1173
		75	(+2, -4: 2.5%)	561	UY74A	9T10A1174
		112.5	(+2, -4: 2.5%)	680	DY75A	9T10A1175
		150	(+2, -4: 2.5%)	1030	DY76A	9T10A1176
		225	(+2, -4: 2.5%)	1450	DY77A	9T10A1177
		300	(+2, -4: 2.5%)	1670	DY78A	9T10A1178
		500	(+2, -2: 2.5%)	2900	DX79A	9T10A1179

General purpose

K = 1 150°C Rise NEMA 2 copper coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	240 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T10C1191
		30	(+2, -4: 2.5%)	353	UX72C	9T10C1192
		45	(+2, -4: 2.5%)	480	UX73C	9T10C1193
		75	(+2, -4: 2.5%)	661	UY74C	9T10C1194
		112.5	(+2, -4: 2.5%)	790	DY75C	9T10C1195
		150	(+2, -4: 2.5%)	1085	DY76C	9T10C1196
		225	(+2, -4: 2.5%)	1610	DY77C	9T10C1197
		300	(+2, -4: 2.5%)	1970	DY78C	9T10C1198

K = 1 150°C Rise NEMA 2 copper coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
600 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T10C2401
		30	(+2, -4: 2.5%)	353	UX72C	9T10C2402
		45	(+2, -4: 2.5%)	480	UX73C	9T10C2403
		75	(+2, -4: 2.5%)	661	UY74C	9T10C2404
		112.5	(+2, -4: 2.5%)	790	DY75C	9T10C2405
		150	(+2, -4: 2.5%)	1085	DY76C	9T10C2406

K = 1 150°C Rise NEMA 2 copper coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T10C1001
		30	(+2, -4: 2.5%)	353	UX02C	9T10C1002
		45	(+2, -4: 2.5%)	480	UX73C	9T10C1003
		75	(+2, -4: 2.5%)	661	UY14C	9T10C1004
		112.5	(+2, -4: 2.5%)	790	DY05C	9T10C1005
		150	(+2, -4: 2.5%)	1085	DY76C	9T10C1006
		225	(+2, -4: 2.5%)	1610	DY77C	9T10C1007
		300	(+2, -4: 2.5%)	1970	DY78C	9T10C1008
		500	(+2, -2: 2.5%)	3720	DX79C	9T10C1009

K = 1 115°C Rise NEMA 2 copper coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T10C1001G31
		30	(+2, -4: 2.5%)	353	UX72C	9T10C1002G31
		45	(+2, -4: 2.5%)	480	UX73C	9T10C1003G31
		75	(+2, -4: 2.5%)	748	DX74C	9T10C1004G31
		112.5	(+2, -4: 2.5%)	900	DX75C	9T10C1005G31
		150	(+2, -4: 2.5%)	1240	DX76C	9T10C1006G31
		225	(+2, -4: 2.5%)	1847	DX77C	9T10C1007G31
		300	(+2, -4: 2.5%)	2150	DX78C	9T10C1008G31

K = 1 80°C Rise NEMA 2 copper coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T10C1001G61
		30	(+2, -4: 2.5%)	480	UX73C	9T10C1002G61
		45	(+2, -4: 2.5%)	661	UY74C	9T10C1003G61
		75	(+2, -4: 2.5%)	790	DY05C	9T10C1004G61
		112.5	(+2, -4: 2.5%)	1085	DY76C	9T10C1005G61
		150	(+2, -4: 2.5%)	1610	DY77C	9T10C1006G61
		225	(+2, -4: 2.5%)	2150	DX78C	9T10C1007G61
		300	(+2, -2: 2.5%)	3720	DX79C	9T10C1008G61

Noise isolation — Guard I™

Product overview

Guard I™ Transformer

Guard I™ noise isolation transformers provide common mode noise reduction between neutral and ground and provides transverse mode noise reduction between the primary and secondary coils. Common causes of electrical noise are electromagnetic interference, radio frequency interference and ground loops.

Features

- Up to 120 dB common mode noise attenuation
- Up to 30 dB transverse mode noise attenuation
- NEMA 1 and/or 2 drip-proof painted enclosure
- Rain shields available for field installation converting the enclosure to NEMA 3R
- NEMA 3R stainless steel (316) available through 150 kVA

Noise isolation — Guard I™

150°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1001G03
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1002G03
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1003G03
		75	(+2, -4: 2.5%)	561	UY74A	9T10A1004G03
		112.5	(+2, -4: 2.5%)	680	DY75A	9T10A1005G03
		150	(+2, -4: 2.5%)	1030	DY76A	9T10A1006G03
		225	(+2, -4: 2.5%)	1450	DY77A	9T10A1007G03
		300	(+2, -4: 2.5%)	1670	DY78A	9T10A1008G03
		500	(+2, -2: 2.5%)	2900	DY79A	9T10A1009G03
		750	(+2, -2: 2.5%)	4292	DX67A	9T10A1302G03

115°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1001G33
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1002G33
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1003G33
		75	(+2, -4: 2.5%)	603	UX74A	9T10A1004G33
		112.5	(+2, -4: 2.5%)	830	DX75A	9T10A1005G33
		150	(+2, -4: 2.5%)	1250	DX76A	9T10A1006G33
		225	(+2, -4: 2.5%)	1670	DX77A	9T10A1007G33
		300	(+2, -4: 2.5%)	1985	DX78A	9T10A1008G33
		500	(+2, -2: 2.5%)	2900	DX79A	9T10A1009G33

80°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	330	UX72A	9T10A1001G63
		30	(+2, -4: 2.5%)	444	UX73A	9T10A1002G63
		45	(+2, -4: 2.5%)	561	UY74A	9T10A1003G63
		75	(+2, -4: 2.5%)	680	DY75A	9T10A1004G63
		112.5	(+2, -4: 2.5%)	1030	DY76A	9T10A1005G63
		150	(+2, -4: 2.5%)	1450	DY77A	9T10A1006G63
		225	(+2, -4: 2.5%)	1985	DX78A	9T10A1007G63
		300	(+2, -2: 2.5%)	2900	DX79A	9T10A1008G63

Noise isolation — Guard I™

150°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T10C1001G03
		30	(+2, -4: 2.5%)	353	UX72C	9T10C1002G03
		45	(+2, -4: 2.5%)	480	UX73C	9T10C1003G03
		75	(+2, -4: 2.5%)	661	UY74C	9T10C1004G03
		112.5	(+2, -4: 2.5%)	790	DY75C	9T10C1005G03
		150	(+2, -4: 2.5%)	1085	DY76C	9T10C1006G03
		225	(+2, -4: 2.5%)	1610	DY77C	9T10C1007G03
		300	(+2, -4: 2.5%)	1970	DY78C	9T10C1008G03
		500	(+2, -2: 2.5%)	3720	DX79C	9T10C1009G03

115°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T10C1001G33
		30	(+2, -4: 2.5%)	353	UX72C	9T10C1002G33
		45	(+2, -4: 2.5%)	480	UX73C	9T10C1003G33
		75	(+2, -4: 2.5%)	748	UX74C	9T10C1004G33
		112.5	(+2, -4: 2.5%)	900	DX75C	9T10C1005G33
		150	(+2, -4: 2.5%)	1240	DX76C	9T10C1006G33
		225	(+2, -4: 2.5%)	1847	DX77C	9T10C1007G33
		300	(+2, -4: 2.5%)	2150	DX78C	9T10C1008G33
		500	(+2, -2: 2.5%)	3720	DX79C	9T10C1009G33

80°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T10C1001G63
		30	(+2, -4: 2.5%)	480	UX73C	9T10C1002G63
		45	(+2, -4: 2.5%)	661	UY74C	9T10C1003G63
		75	(+2, -4: 2.5%)	790	DY75C	9T10C1004G63
		112.5	(+2, -4: 2.5%)	1085	DY76C	9T10C1005G63
		150	(+2, -4: 2.5%)	1610	DY77C	9T10C1006G63
		225	(+2, -4: 2.5%)	2150	DX78C	9T10C1007G63
		300	(+2, -2: 2.5%)	3720	DX79C	9T10C1008G63

Noise isolation — Guard II™

Product overview

Guard II™ Transformer

Guard II™ noise isolation transformers provide common mode noise attenuation plus an enhanced level of transverse mode noise attenuation for increased protection of sensitive electronic equipment.

Features

- Grounded copper electrostatic shield between primary and secondary windings
- Built-in electrical noise filters and spike/surge suppressors
- Up to 120 dB common mode noise attenuation
- Up to 60 dB transverse mode noise attenuation
- Compliance with applicable UL, ANSI and NEMA standards
- NEMA 2 enclosure

Noise isolation — Guard II™

150°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	260	XV371	9T17A1001G03
		30	(+2, -4: 2.5%)	370	XV372	9T17A1002G03
		45	(+2, -4: 2.5%)	460	XV373	9T17A1003G03
		75	(+2, -4: 2.5%)	680	XV374	9T17A1004G03
		112.5	(+2, -4: 2.5%)	830	XV375	9T17A1005G03

115°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	260	XV371	9T17A1001G33
		30	(+2, -4: 2.5%)	370	XV372	9T17A1002G33
		45	(+2, -4: 2.5%)	460	XV373	9T17A1003G33

80°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	45	(+2, -4: 2.5%)	680	XV374	9T17A1003G63
		75	(+2, -4: 2.5%)	830	XV375	9T17A1004G63

150°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
208 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	260	XV371	9T17A1451G03
		30	(+2, -4: 2.5%)	370	XV372	9T17A1452G03
		45	(+2, -4: 2.5%)	460	XV373	9T17A1453G03
		75	(+2, -4: 2.5%)	680	XV374	9T17A1454G03
		112.5	(+2, -4: 2.5%)	830	XV375	9T17A1455G03

115°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
208 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	260	XV371	9T17A1451G33
		30	(+2, -4: 2.5%)	370	XV372	9T17A1452G33
		45	(+2, -4: 2.5%)	460	XV373	9T17A1453G33
		75	(+2, -4: 2.5%)	680	XV374	9T17A1454G33

80°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
208 Volts Delta	208Y/120 Volts	75	(+2, -4: 2.5%)	830	XV375	9T17A1454G63

Noise isolation — Guard II™

150°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	270	XV371	9T17C1001G03
		30	(+2, -4: 2.5%)	420	XV372	9T17C1002G03
		45	(+2, -4: 2.5%)	540	XV373	9T17C1003G03
		75	(+2, -4: 2.5%)	770	XV374	9T17C1004G03
		112.5	(+2, -4: 2.5%)	1010	XV375	9T17C1005G03

115°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	270	XV371	9T17C1001G33
		30	(+2, -4: 2.5%)	420	XV372	9T17C1002G33
		45	(+2, -4: 2.5%)	540	XV373	9T17C1003G33
		75	(+2, -4: 2.5%)	770	XV374	9T17C1004G33
		112.5	(+2, -4: 2.5%)	1010	XV375	9T17C1005G33

80°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	420	XV372	9T17C1001G63
		30	(+2, -4: 2.5%)	540	XV373	9T17C1002G63
		45	(+2, -4: 2.5%)	770	XV374	9T17C1003G63
		75	(+2, -4: 2.5%)	1010	XV375	9T17C1004G63

150°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
208 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	270	XV371	9T17C1451G03
		30	(+2, -4: 2.5%)	420	XV372	9T17C1452G03
		45	(+2, -4: 2.5%)	540	XV373	9T17C1453G03

115°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
208 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	270	XV371	9T17C1451G33
		30	(+2, -4: 2.5%)	420	XV372	9T17C1452G33
		45	(+2, -4: 2.5%)	540	XV373	9T17C1453G33
		75	(+2, -4: 2.5%)	770	XV374	9T17C1454G33

Harmonic mitigating — Guard III™

Product overview

Guard III™ Transformer

Guard III™ Harmonic Mitigating Transformers help eliminate harmonics, improve power quality, and help save energy by reducing the energy (heating) losses. They maintain DOE 2016 energy efficiency even when harmonics are present.

Power supplies that convert AC to DC current – for plant floor equipment, computers, copiers, electronic ballasts, and others – generate harmonics that create an irregular current waveform. These harmonics, in turn, create power quality problems such as overheated transformers, motors and neutral wires; nuisance breaker trips; and electronic equipment malfunction and failure.

Features

- 0° Phase shift; +15° Phase Shift; -15° Phase Shift or -30° Phase Shift
- Copper windings
- K-factor load profile of 20
- Crest factor load profile of 5
- NEMA 1 and/or 2 drip-proof enclosure
- Rain shield available for field conversion to NEMA 3R
- NEMA 3R stainless steel (Type 316) up through 150 kVA

Harmonic mitigating — Guard III™

150°C Rise NEMA 2, 0° phase shift copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	318	H371C	9T76H9871G03
		30	552	H372C	9T76H9872G03
		45	643	H373C	9T76H9873G03
		75	1053	H374C	9T76H9874G03
		112.5	1980	H375C	9T76H9875G03
		150	2125	H376C	9T76H9876G03
		300	3170	YF378	9T76H9878G03

150°C Rise NEMA 2, -30° phase shift copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	318	H371C	9T77H9871G03
		30	552	H372C	9T77H9872G03
		45	643	H373C	9T77H9873G03
		75	1053	H374C	9T77H9874G03
		112.5	1980	H375C	9T77H9875G03
		150	2125	H376C	9T77H9876G03
		300	3170	YF378	9T77H9878G03

150° C Rise NEMA 2, +15° phase shift copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	112.5	1980	H375C	9T79H9875G03

150° C Rise NEMA 2, -15° phase shift copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	112.5	1980	H375C	9T78H9875G03

K-factor

Product overview

Type QL, UL K-factor Transformer

K-factor is a standardized way to indicate the ability of a transformer to withstand harmonics. These units shall not exceed rated winding temperature rise at full load and rated K-factor. Neutrals and lugs are capable of handling 200% of rated secondary full load current.

Full-width copper electrostatic shielding is standard on all ABB K-factor rated transformers. Effective coupling capacitance is 30 pf. Common mode noise attenuation averages up to 120 dB, and transverse mode noise attenuation averages up to 30 dB.

Features

- Full-width copper electrostatic shielding standard
- Unique core and coil design using grain-oriented silicon steel
- Core and coil assemblies mounted on rubber isolation pads
- Single piece front/back
- Outward-facing feet
- Lifting eyes provided in the top clamp
- Lug kit included up through 150kVA
- Copper ground bar kit included up through 150kVA
- Copper ground strap

K-factor

K=4 150°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T14A1001G03
		30	(+2, -4: 2.5%)	444	UX73A	9T14A1002G03
		45	(+2, -4: 2.5%)	444	UX73A	9T14A1003G03
		75	(+2, -4: 2.5%)	680	DY75A	9T14A1004G03
		112.5	(+2, -4: 2.5%)	1030	DY76A	9T14A1005G03
		150	(+2, -4: 2.5%)	1250	DX76A	9T14A1006G03
		225	(+2, -4: 2.5%)	1670	DY78A	9T14A1007G03
		300	(+2, -2: 2.5%)	2900	DY79A	9T14A1008G03

K=4 115°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T14A1001G33
		30	(+2, -4: 2.5%)	444	UX73A	9T14A1002G33
		45	(+2, -4: 2.5%)	561	UY74A	9T14A1003G33
		75	(+2, -4: 2.5%)	680	DY75A	9T14A1004G33
		112.5	(+2, -4: 2.5%)	1030	DY76A	9T14A1005G33
		150	(+2, -4: 2.5%)	1250	DX76A	9T14A1006G33
		225	(+2, -4: 2.5%)	1670	DY78A	9T14A1007G33
		300	(+2, -2: 2.5%)	2900	DY79A	9T14A1008G33

K=4 80°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	30	(+2, -4: 2.5%)	444	UX73A	9T14A1002G63
		45	(+2, -4: 2.5%)	561	UY74A	9T14A1003G63
		75	(+2, -4: 2.5%)	830	DX75A	9T14A1004G63
		112.5	(+2, -4: 2.5%)	1250	DX76A	9T14A1005G63

K=13 150°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	45	(+2, -4: 2.5%)	444	UX73A	9T11A1003G03
		75	(+2, -4: 2.5%)	603	DY75A	9T11A1004G03
		112.5	(+2, -4: 2.5%)	1030	DY76A	9T11A1005G03
		150	(+2, -4: 2.5%)	1250	DX76A	9T11A1006G03
		225	(+2, -4: 2.5%)	1670	DY78A	9T11A1007G03
		300	(+2, -2: 2.5%)	2900	DY79A	9T11A1008G03
		500	(+2,-2, 2.5%)	4292	DY67A	9T11A1009G03

K=13 115°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	30	(+2, -4: 2.5%)	444	UX73A	9T11A1002G33
		75	(+2, -4: 2.5%)	680	DY75A	9T11A1004G33
		112.5	(+2, -4: 2.5%)	1250	DX76A	9T11A1005G33
		150	(+2, -4: 2.5%)	1450	DY77A	9T11A1006G33
		225	(+2, -4: 2.5%)	1670	DY78A	9T11A1007G33
		300	(+2, -2: 2.5%)	2900	DY79A	9T11A1008G33

K=13 80°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	30	(+2, -4: 2.5%)	561	UX73A	9T11A1002G63
		45	(+2, -4: 2.5%)	561	UY74A	9T11A1003G63
		75	(+2, -4: 2.5%)	830	DX75A	9T11A1004G63
		112.5	(+2, -4: 2.5%)	1670	DX77A	9T11A1005G63
		150	(+2, -4: 2.5%)	1670	DX77A	9T11A1006G63
		225	(+2, -2: 2.5%)	2900	DX79A	9T11A1007G63

K-factor

K=20 150°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	45	(+2, -4: 2.5%)	561	UY74A	9T12A1003G03
		75	(+2, -4: 2.5%)	[1]	[1]	9T12A1004G03
		112.5	(+2, -4: 2.5%)	1250	DX76A	9T12A1005G03
		150	(+2, -4: 2.5%)	1450	DY77A	9T12A1006G03
		225	(+2, -4: 2.5%)	1670	DY78A	9T12A1007G03

K=20 115°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	30	(+2, -4: 2.5%)	561	UY74A	9T12A1003G33
		75	(+2, -4: 2.5%)	680	DY75A	9T12A1004G33
		112.5	(+2, -4: 2.5%)	[1]	[1]	9T12A1005G33
		150	(+2, -4: 2.5%)	[1]	[1]	9T12A1006G33
		225	(+2, -4: 2.5%)	[1]	[1]	9T12A1007G33
		300	(+2, -4: 2.5%)	[1]	[1]	9T12A1008G33

K=20 80°C Rise NEMA 2 aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	30	(+2, -4: 2.5%)	[1]	[1]	9T12A1002G63
		45	(+2, -4: 2.5%)	[1]	[1]	9T12A1003G63
		75	(+2, -4: 2.5%)	830	DX75A	9T12A1004G63
		112.5	(+2, -4: 2.5%)	[1]	[1]	9T12A1005G63
		150	(+2, -4: 2.5%)	1670	DX77A	9T12A1006G63
		225	(+2, -4: 2.5%)	[1]	[1]	9T12A1007G63
		300	(+2, -4: 2.5%)	[1]	[1]	9T12A1008G63

[1]Contact Customer Service for more information on these transformers.

K-factor

K=4 150°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T14C1001G03
		30	(+2, -4: 2.5%)	353	UX72C	9T14C1002G03
		45	(+2, -4: 2.5%)	480	UX73C	9T14C1003G03
		75	(+2, -4: 2.5%)	661	UY74C	9T14C1004G03
		112.5	(+2, -4: 2.5%)	790	DY75C	9T14C1005G03
		150	(+2, -4: 2.5%)	1610	DY77C	9T14C1006G03
		225	(+2, -4: 2.5%)	1847	DX77C	9T14C1007G03
		300	(+2, -2: 2.5%)	3720	DX78C	9T14C1008G03

K=4 115°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T14C1001G33
		30	(+2, -4: 2.5%)	480	UX73C	9T14C1002G33
		45	(+2, -4: 2.5%)	661	UY74C	9T14C1003G33
		75	(+2, -4: 2.5%)	748	UX74C	9T14C1004G33
		112.5	(+2, -4: 2.5%)	900	DX75C	9T14C1005G33
		150	(+2, -4: 2.5%)	1610	DY77C	9T14C1006G33
		225	(+2, -4: 2.5%)	2150	DX78C	9T14C1007G33
		300	(+2, -2: 2.5%)	3720	DX79C	9T14C1008G33
		500	(+2, -2: 2.5%)	[1]	[1]	9T14C1009G33

K=4 80°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T14C1001G63
		30	(+2, -4: 2.5%)	480	UX73C	9T14C1002G63
		45	(+2, -4: 2.5%)	661	UY74C	9T14C1003G63
		75	(+2, -4: 2.5%)	790	DY75C	9T14C1004G63
		112.5	(+2, -4: 2.5%)	1085	DY76C	9T14C1005G63
		150	(+2, -4: 2.5%)	1610	DY77C	9T14C1006G63
		225	(+2, -4: 2.5%)	2150	DX78C	9T14C1007G63
		300	(+2, -2: 2.5%)	3720	DX79C	9T14C1008G63

[1]Contact Customer Service for more information on these transformers.

K-factor

K=13 150°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T11C1001G03
		30	(+2, -4: 2.5%)	353	UX72C	9T11C1002G03
		45	(+2, -4: 2.5%)	480	UX73C	9T11C1003G03
		75	(+2, -4: 2.5%)	790	DY75C	9T11C1004G03
		112.5	(+2, -4: 2.5%)	790	DY75C	9T11C1005G03
		150	(+2, -4: 2.5%)	1610	DY77C	9T11C1006G03
		225	(+2, -4: 2.5%)	2150	DX78C	9T11C1007G03
		300	(+2, -2: 2.5%)	3720	DX79C	9T11C1008G03

K=13 115°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T11C1001G33
		30	(+2, -4: 2.5%)	480	UX73C	9T11C1002G33
		45	(+2, -4: 2.5%)	661	UY74C	9T11C1003G33
		75	(+2, -4: 2.5%)	790	DY75C	9T11C1004G33
		112.5	(+2, -4: 2.5%)	1085	DY76C	9T11C1005G33
		150	(+2, -4: 2.5%)	1610	DY77C	9T11C1006G33
		225	(+2, -4: 2.5%)	3720	DX78C	9T11C1007G33
		300	(+2, -2: 2.5%)	3720	DX79C	9T11C1008G33
		500	(+2, -2: 2.5%)	[1]	[1]	9T11C1009G33

K=13 80°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T11C1001G63
		30	(+2, -4: 2.5%)	480	UX73C	9T11C1002G63
		45	(+2, -4: 2.5%)	661	UY74C	9T11C1003G63
		75	(+2, -4: 2.5%)	790	DY75C	9T11C1004G63
		112.5	(+2, -4: 2.5%)	1085	DY77C	9T11C1005G63
		150	(+2, -4: 2.5%)	1610	DY77C	9T11C1006G63
		225	(+2, -2: 2.5%)	3720	DX79C	9T11C1007G63
		300	(+2, -4: 2.5%)	[1]	[1]	9T11C1008G63

[1]Contact Customer Service for more information on these transformers.

K-factor

K=20 150°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T12C1001G03
		30	(+2, -4: 2.5%)	480	UX73C	9T12C1002G03
		45	(+2, -4: 2.5%)	661	UY74C	9T12C1003G03
		75	(+2, -4: 2.5%)	790	DY75C	9T12C1004G03
		112.5	(+2, -4: 2.5%)	1085	DY76C	9T12C1005G03
		150	(+2, -4: 2.5%)	[1]	[1]	9T12C1006G03
		225	(+2, -4: 2.5%)	[1]	[1]	9T12C1007G03
		300	(+2, -4: 2.5%)	[1]	[1]	9T12C1008G03

K=20 115°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T12C1001G33
		30	(+2, -4: 2.5%)	[1]	[1]	9T12C1002G33
		45	(+2, -4: 2.5%)	661	UY74C	9T12C1003G33
		75	(+2, -4: 2.5%)	790	DY75C	9T12C1004G33
		112.5	(+2, -4: 2.5%)	[1]	[1]	9T12C1005G33
		150	(+2, -4: 2.5%)	[1]	[1]	9T12C1006G33
		225	(+2, -4: 2.5%)	2150	DX78C	9T12C1007G33
		300	(+2, -4: 2.5%)	[1]	[1]	9T12C1008G33

K=20 80°C Rise NEMA 2 copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	[1]	[1]	9T12C1001G63
		30	(+2, -4: 2.5%)	480	UX73C	9T12C1002G63
		45	(+2, -4: 2.5%)	[1]	[1]	9T12C1003G63
		75	(+2, -4: 2.5%)	[1]	[1]	9T12C1004G63
		112.5	(+2, -4: 2.5%)	[1]	[1]	9T12C1005G63
		150	(+2, -4: 2.5%)	[1]	[1]	9T12C1006G63

[1]Contact Customer Service for more information on these transformers.

K-factor low noise (-3 dB below NEMA ST-20 standard)

K=4 150°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T14A1001G04
		30	(+2, -4: 2.5%)	444	UX73A	9T14A1002G04
		45	(+2, -4: 2.5%)	444	UX73A	9T14A1003G04
		75	(+2, -4: 2.5%)	603	DY75A	9T14A1004G04
		112.5	(+2, -4: 2.5%)	1030	DY76A	9T14A1005G04
		150	(+2, -4: 2.5%)	1250	DX76A	9T14A1006G04
		225	(+2, -4: 2.5%)	1670	DY78A	9T14A1007G04
		300	(+2, -2: 2.5%)	2900	DY79A	9T14A1008G04

K=4 115°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T14A1001G34
		30	(+2, -4: 2.5%)	444	UX73A	9T14A1002G34
		45	(+2, -4: 2.5%)	561	UY74A	9T14A1003G34
		75	(+2, -4: 2.5%)	680	DY75A	9T14A1004G34
		112.5	(+2, -4: 2.5%)	1030	DY76A	9T14A1005G34
		150	(+2, -4: 2.5%)	1250	DX76A	9T14A1006G34
		225	(+2, -4: 2.5%)	1670	DY78A	9T14A1007G34
		300	(+2, -2: 2.5%)	2900	DY79A	9T14A1008G34

K=4 80°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	112.5	(+2, -4: 2.5%)	1250	DX76A	9T14A1005G64
		150	(+2, -4: 2.5%)	1670	DX77A	9T14A1006G64

K=13 150°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T11A1001G04
		30	(+2, -4: 2.5%)	444	UX73A	9T11A1002G04
		45	(+2, -4: 2.5%)	444	UX73A	9T11A1003G04
		75	(+2, -4: 2.5%)	603	DY75A	9T11A1004G04
		112.5	(+2, -4: 2.5%)	1030	DY76A	9T11A1005G04
		150	(+2, -4: 2.5%)	1250	DX76A	9T11A1006G04
		225	(+2, -4: 2.5%)	1670	DY78A	9T11A1007G04
		300	(+2, -2: 2.5%)	2900	DY79A	9T11A1008G04

K=13 115°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T11A1001G34
		30	(+2, -4: 2.5%)	444	UX73A	9T11A1002G34
		45	(+2, -4: 2.5%)	561	UY74A	9T11A1003G34
		75	(+2, -4: 2.5%)	680	DY75A	9T11A1004G34
		112.5	(+2, -4: 2.5%)	1250	DX76A	9T11A1005G34
		150	(+2, -4: 2.5%)	1450	DY77A	9T11A1006G34
		225	(+2, -4: 2.5%)	1670	DY78A	9T11A1007G34
		300	(+2, -2: 2.5%)	2900	DY79A	9T11A1008G34

K=13 80°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	30	(+2, -4: 2.5%)	561	UX73A	9T11A1002G64
		45	(+2, -4: 2.5%)	561	UY74A	9T11A1003G64
		75	(+2, -4: 2.5%)	680	DY75A	9T11A1004G64
		112.5	(+2, -4: 2.5%)	1670	DX77A	9T11A1005G64

K-factor low noise (-3 dB below NEMA ST-20 standard)

K=20 150°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	[1]	[1]	9T12A1001G04
		30	(+2, -4: 2.5%)	[1]	[1]	9T12A1002G04
		45	(+2, -4: 2.5%)	[1]	[1]	9T12A1003G04
		75	(+2, -4: 2.5%)	[1]	[1]	9T12A1004G04
		112.5	(+2, -4: 2.5%)	[1]	[1]	9T12A1005G04
		150	(+2, -4: 2.5%)	[1]	[1]	9T12A1006G04
		225	(+2, -4: 2.5%)	[1]	[1]	9T12A1007G04

K=20 115°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	[1]	[1]	9T12A1001G34
		30	(+2, -4: 2.5%)	[1]	[1]	9T12A1002G34
		45	(+2, -4: 2.5%)	[1]	[1]	9T12A1003G34
		75	(+2, -4: 2.5%)	[1]	[1]	9T12A1004G34
		112.5	(+2, -4: 2.5%)	[1]	[1]	9T12A1005G34

K=20 80°C Rise aluminum coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	[1]	[1]	9T12A1001G64
		30	(+2, -4: 2.5%)	[1]	[1]	9T12A1002G64
		45	(+2, -4: 2.5%)	[1]	[1]	9T12A1003G64
		75	(+2, -4: 2.5%)	[1]	[1]	9T12A1004G64
		112.5	(+2, -4: 2.5%)	[1]	[1]	9T12A1005G64

[1]Contact Customer Service for more information on these transformers.

K-factor low noise (-3 dB below NEMA ST-20 standard)

K=4 150°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T14C1001G04
		30	(+2, -4: 2.5%)	353	UX72C	9T14C1002G04
		45	(+2, -4: 2.5%)	480	UX73C	9T14C1003G04
		75	(+2, -4: 2.5%)	661	UY74C	9T14C1004G04
		112.5	(+2, -4: 2.5%)	790	DY75C	9T14C1005G04
		150	(+2, -4: 2.5%)	1610	DY77C	9T14C1006G04
		225	(+2, -4: 2.5%)	1970	DX77C	9T14C1007G04
		300	(+2, -2: 2.5%)	3720	DX78C	9T14C1008G04

K=4 115°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T14C1001G34
		30	(+2, -4: 2.5%)	353	UX73C	9T14C1002G34
		45	(+2, -4: 2.5%)	661	UY74C	9T14C1003G34
		75	(+2, -4: 2.5%)	790	UX74C	9T14C1004G34
		112.5	(+2, -4: 2.5%)	900	DX75C	9T14C1005G34
		150	(+2, -4: 2.5%)	1610	DY77C	9T14C1006G34
		225	(+2, -4: 2.5%)	2150	DX78C	9T14C1007G34
		300	(+2, -2: 2.5%)	3720	DX79C	9T14C1008G34

K=4 80°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T14C1001G64
		30	(+2, -4: 2.5%)	480	UX73C	9T14C1002G64
		45	(+2, -4: 2.5%)	661	UY74C	9T14C1003G64
		75	(+2, -4: 2.5%)	790	DY75C	9T14C1004G64
		112.5	(+2, -4: 2.5%)	1240	DY76C	9T14C1005G64

K=13 150°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T11C1001G04
		30	(+2, -4: 2.5%)	353	UX72C	9T11C1002G04
		45	(+2, -4: 2.5%)	480	UX73C	9T11C1003G04
		75	(+2, -4: 2.5%)	790	DY75C	9T11C1004G04
		112.5	(+2, -4: 2.5%)	790	DY75C	9T11C1005G04
		150	(+2, -4: 2.5%)	1610	DY77C	9T11C1006G04
		225	(+2, -4: 2.5%)	1970	DX78C	9T11C1007G04
		300	(+2, -2: 2.5%)	3720	DX79C	9T11C1008G04

K=13 115°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T11C1001G34
		30	(+2, -4: 2.5%)	480	UX73C	9T11C1002G34
		45	(+2, -4: 2.5%)	661	UY74C	9T11C1003G34
		75	(+2, -4: 2.5%)	790	DY75C	9T11C1004G34
		112.5	(+2, -4: 2.5%)	1085	DY76C	9T11C1005G34
		150	(+2, -4: 2.5%)	1610	DY77C	9T11C1006G34
		225	(+2, -2: 2.5%)	3720	DX78C	9T11C1007G34
		300	(+2, -2: 2.5%)	3720	DX79C	9T11C1008G34

K=13 80°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T11C1001G64
		30	(+2, -4: 2.5%)	661	UX73C	9T11C1002G64
		45	(+2, -4: 2.5%)	661	UY74C	9T11C1003G64
		75	(+2, -4: 2.5%)	790	DY75C	9T11C1004G64
		112.5	(+2, -4: 2.5%)	1240	DX76C	9T11C1005G64
		150	(+2, -4: 2.5%)	1610	DY77C	9T11C1006G64
		225	(+2, -2: 2.5%)	3720	DX79C	9T11C1007G64

K-factor low noise (-3 dB below NEMA ST-20 standard)

K=20 150°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	[1]	[1]	9T12C1001G04
		30	(+2, -4: 2.5%)	[1]	[1]	9T12C1002G04
		45	(+2, -4: 2.5%)	[1]	[1]	9T12C1003G04
		75	(+2, -4: 2.5%)	[1]	[1]	9T12C1004G04
		112.5	(+2, -4: 2.5%)	1085	DY76C	9T12C1005G04
		150	(+2, -4: 2.5%)	[1]	[1]	9T12C1006G04

K=20 115°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T12C1001G34
		30	(+2, -4: 2.5%)	[1]	[1]	9T12C1002G34
		45	(+2, -4: 2.5%)	[1]	[1]	9T12C1003G34
		75	(+2, -4: 2.5%)	[1]	[1]	9T12C1004G34
		112.5	(+2, -4: 2.5%)	[1]	[1]	9T12C1005G34
		150	(+2, -4: 2.5%)	[1]	[1]	9T12C1006G34

K=20 80°C Rise copper coil electrostatic shield three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	[1]	[1]	9T12C1001G64
		30	(+2, -4: 2.5%)	[1]	[1]	9T12C1002G64
		45	(+2, -4: 2.5%)	[1]	[1]	9T12C1003G64
		75	(+2, -4: 2.5%)	[1]	[1]	9T12C1004G64
		112.5	(+2, -4: 2.5%)	[1]	[1]	9T12C1005G64

[1]Contact Customer Service for more information on these transformers.

Low noise (-3 dB below NEMA ST-20 standard)

Product overview

Type QL Low Noise Transformer

Low noise transformers are designed to operate at reduced noise levels. The vibrations within the magnetic steel core have been greatly reduced, thus lowering the humming of the transformer 3dB less than NEMA/ANSI standards.

Although they are quieter, installation can greatly influence their noise level. Closets and corners should be avoided as they act as megaphones by seemingly increasing noise levels. Care should be taken in following acoustical principles and proper installation procedures.

Features

- Unique core and coil design using grain-oriented silicon steel
- Core and coil assemblies mounted on rubber isolation pads
- Single piece front/back
- Outward facing feet
- Lifting eyes provided in top clamp
- Lug kit included up through 150kVA
- Copper ground bar kit included up through 150kVA
- Copper ground strap

Low noise (-3 dB below NEMA ST-20 standard)

150°C Rise NEMA 2 aluminum coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1001G02
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1002G02
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1003G02
		75	(+2, -4: 2.5%)	561	UY74A	9T10A1004G02
		112.5	(+2, -4: 2.5%)	680	DY05A	9T10A1005G02
		150	(+2, -4: 2.5%)	1030	DY76A	9T10A1006G02
		225	(+2, -4: 2.5%)	1450	DY17A	9T10A1007G02
		300	(+2, -4: 2.5%)	1670	DY08A	9T10A1008G02
		500	(+2, -2: 2.5%)	2900	DY79A	9T10A1009G02

115°C Rise NEMA 2 aluminum coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	231	UX71A	9T10A1001G32
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1002G32
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1003G32
		75	(+2, -4: 2.5%)	603	UX74C	9T10A1004G32
		112.5	(+2, -4: 2.5%)	830	DX75A	9T10A1005G32
		150	(+2, -4: 2.5%)	1250	DX76A	9T10A1006G32
		225	(+2, -4: 2.5%)	1670	DX77A	9T10A1007G32
		300	(+2, -4: 2.5%)	1985	DX78A	9T10A1008G32
		500	(+2, -2: 2.5%)	2900	DX79A	9T10A1009G32

80°C Rise NEMA 2 aluminum coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	330	UX72A	9T10A1001G62
		30	(+2, -4: 2.5%)	444	UX73A	9T10A1002G62
		45	(+2, -4: 2.5%)	561	UY74A	9T10A1003G62
		75	(+2, -4: 2.5%)	680	DY05A	9T10A1004G62
		112.5	(+2, -4: 2.5%)	1030	DY76A	9T10A1005G62
		150	(+2, -4: 2.5%)	1450	DY17A	9T10A1006G62
		225	(+2, -4: 2.5%)	1985	DX78A	9T10A1007G62
		300	(+2, -2: 2.5%)	2900	DY79A	9T10A1008G62

Low noise (-3 dB below NEMA ST-20 standard)

150°C Rise NEMA 2 copper coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T10C1001G02
		30	(+2, -4: 2.5%)	353	UX72C	9T10C1002G02
		45	(+2, -4: 2.5%)	480	UX73C	9T10C1003G02
		75	(+2, -4: 2.5%)	661	UY74C	9T10C1004G02
		112.5	(+2, -4: 2.5%)	790	DY05C	9T10C1005G02
		150	(+2, -4: 2.5%)	1085	DY76C	9T10C1006G02
		225	(+2, -4: 2.5%)	1610	DY77C	9T10C1007G02
		300	(+2, -4: 2.5%)	1970	DY78C	9T10C1008G02
		500	(+2, -2: 2.5%)	3720	DX79C	9T10C1009G02

115°C Rise NEMA 2 copper coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	230	UX71C	9T10C1001G32
		30	(+2, -4: 2.5%)	353	UX72C	9T10C1002G32
		45	(+2, -4: 2.5%)	480	UX73C	9T10C1003G32
		75	(+2, -4: 2.5%)	748	DX74C	9T10C1004G32
		112.5	(+2, -4: 2.5%)	900	DX75C	9T10C1005G32
		150	(+2, -4: 2.5%)	1240	DX76C	9T10C1006G32
		225	(+2, -4: 2.5%)	1847	DX77C	9T10C1007G32
		300	(+2, -4: 2.5%)	2150	DX78C	9T10C1008G32
		500	(+2, -2: 2.5%)	3720	DX79C	9T10C1009G32

80°C Rise NEMA 2 copper coil three-phase

Input voltage	Output voltage	kVA	Taps	Approx. net weight (Lbs)	Frame size	Ordering code
480 Volts Delta	208Y/120 Volts	15	(+2, -4: 2.5%)	353	UX72C	9T10C1001G62
		30	(+2, -4: 2.5%)	480	UX73C	9T10C1002G62
		45	(+2, -4: 2.5%)	661	UY74C	9T10C1003G62
		75	(+2, -4: 2.5%)	790	DY05C	9T10C1004G62
		112.5	(+2, -4: 2.5%)	1085	DY76C	9T10C1005G62
		150	(+2, -4: 2.5%)	1610	DY77C	9T10C1006G62
		225	(+2, -4: 2.5%)	2150	DX78C	9T10C1007G62
		300	(+2, -2: 2.5%)	3720	DX79C	9T10C1008G62

Midtapped
Product overview

Type QL Midtapped Transformer

ABB Type QL midtapped transformer enables the user to transform three-phase power from 480 Volts primary to 240 Volts secondary and have 120 Volt, reduced capacity tap (RCT) single-phase capability as well. This is because a single-phase midtap is brought out of one coil of the unit's three-phase secondary winding. These transformers are UL listed, File E-79145.

The Type QL midtapped design can be used wherever there is 480 Volt, three-phase supply available and the load is primarily 240 Volt three-phase with a nominal amount of 120 Volt, single-phase power required. Normally, in this instance, a small single-phase as well as a three-phase transformer would be required to provide the necessary transformation.

Caution: When utilizing the 120 Volt midtap for single-phase applications, the single-phase load should not exceed 5 percent of the three-phase kVA rating. The three-phase kVA load must be reduced by the same percentage as that added by the single-phase load. Additional loading beyond 5 percent may cause the transformer to overheat and fail. If the single-phase load is in excess of 5 percent, it is recommended that a separate single-phase unit be used to handle the load.

Midtapped

150°C Rise 60Hz aluminum three-phase

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	240/120	15	(+2, -4: 2.5%)	231	UX71A	9T10A1181
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1182
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1183
		75	(+2, -4: 2.5%)	561	UY74A	9T10A1184
		112.5	(+2, -4: 2.5%)	830	DX75A	9T10A1185
		150	(+2, -4: 2.5%)	1030	DY76A	9T10A1186
		225	(+2, -4: 2.5%)	1450	DY77A	9T10A1187
		300	(+2, -4: 2.5%)	1670	DY78A	9T10A1188
		500	(+2, -2: 2.5%)	2900	DX79A	9T10A1189

115°C Rise 60Hz aluminum three-phase

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	240/120	15	(+2, -4: 2.5%)	231	UX71A	9T10A1181G31
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1182G31
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1183G31
		75	(+2, -4: 2.5%)	603	UX74A	9T10A1184G31
		112.5	(+2, -4: 2.5%)	830	DX75A	9T10A1185G31
		150	(+2, -4: 2.5%)	1250	DX76A	9T10A1186G31
		225	(+2, -4: 2.5%)	1670	DX77A	9T10A1187G31
		300	(+2, -4: 2.5%)	1985	DX78A	9T10A1188G31
		500	(+2, -2: 2.5%)	2900	DX79A	9T10A1189G31

80°C Rise 60Hz aluminum three-phase

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	240/120	15	(+2, -4: 2.5%)	330	UX72A	9T10A1181G61
		30	(+2, -4: 2.5%)	444	UX73A	9T10A1182G61
		45	(+2, -4: 2.5%)	561	UY74A	9T10A1183G61
		75	(+2, -4: 2.5%)	680	DY75A	9T10A1184G61
		150	(+2, -4: 2.5%)	1450	DY77A	9T10A1186G61
		225	(+2, -4: 2.5%)	1985	DX78A	9T10A1187G61

150°C Rise 60Hz Low Noise (-3dB) aluminum three-phase

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	240/120	15	(+2, -4: 2.5%)	231	UX71A	9T10A1181G02
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1182G02
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1183G02
		75	(+2, -4: 2.5%)	561	UY74A	9T10A1184G02
		112.5	(+2, -4: 2.5%)	680	DX75A	9T10A1185G02
		150	(+2, -4: 2.5%)	1030	DY76A	9T10A1186G02
		225	(+2, -4: 2.5%)	1450	DY77A	9T10A1187G02
		300	(+2, -4: 2.5%)	1670	DY78A	9T10A1188G02
		500	(+2, -2: 2.5%)	2900	DX79A	9T10A1189G02

115°C Rise 60Hz Low Noise (-3dB) aluminum three-phase

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	240/120	15	(+2, -4: 2.5%)	231	UX71A	9T10A1181G32
		30	(+2, -4: 2.5%)	330	UX72A	9T10A1182G32
		45	(+2, -4: 2.5%)	444	UX73A	9T10A1183G32
		75	(+2, -4: 2.5%)	603	UX74A	9T10A1184G32
		112.5	(+2, -4: 2.5%)	830	DX75A	9T10A1185G32
		150	(+2, -4: 2.5%)	1250	DX76A	9T10A1186G32
		225	(+2, -4: 2.5%)	1670	DX77A	9T10A1187G32
		300	(+2, -4: 2.5%)	1985	DX78A	9T10A1188G32
		500	(+2, -2: 2.5%)	2900	DX79A	9T10A1189G32

Midtapped

150°C Rise 60Hz copper three-phase

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	240/120	15	(+2, -4: 2.5%)	230	UX71C	9T10C1181
		30	(+2, -4: 2.5%)	353	UX72C	9T10C1182
		45	(+2, -4: 2.5%)	480	UX73C	9T10C1183
		75	(+2, -4: 2.5%)	661	UY74C	9T10C1184
		112.5	(+2, -4: 2.5%)	790	DY75C	9T10C1185
		150	(+2, -4: 2.5%)	1085	DY76C	9T10C1186
		225	(+2, -4: 2.5%)	1610	DY77C	9T10C1187
		300	(+2, -4: 2.5%)	1970	DY78C	9T10C1188
		500	(+2, -2: 2.5%)	3720	DX79C	9T10C1189

115°C Rise 60Hz copper three-phase

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	240/120	15	(+2, -4: 2.5%)	230	UX71C	9T10C1181G31
		30	(+2, -4: 2.5%)	353	UX72C	9T10C1182G31
		45	(+2, -4: 2.5%)	480	UX73C	9T10C1183G31
		75	(+2, -4: 2.5%)	748	UX74C	9T10C1184G31
		112.5	(+2, -4: 2.5%)	900	DX75C	9T10C1185G31
		150	(+2, -4: 2.5%)	1240	DX76C	9T10C1186G31
		300	(+2, -4: 2.5%)	2150	DX78C	9T10C1188G31
		500	(+2, -2: 2.5%)	3720	DX79C	9T10C1189G31

80°C Rise 60Hz copper three-phase

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	240/120	15	(+2, -4: 2.5%)	353	UX72C	9T10C1181G61
		30	(+2, -4: 2.5%)	480	UX73C	9T10C1182G61
		45	(+2, -4: 2.5%)	661	UY74C	9T10C1183G61
		75	(+2, -4: 2.5%)	790	DY75C	9T10C1184G61
		225	(+2, -4: 2.5%)	2150	DX78C	9T10C1187G61

150°C Rise 60Hz Low Noise (-3dB) copper three-phase

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	240/120	15	(+2, -4: 2.5%)	230	UX71C	9T10C1181G02
		30	(+2, -4: 2.5%)	353	UX72C	9T10C1182G02
		45	(+2, -4: 2.5%)	480	UX73C	9T10C1183G02
		75	(+2, -4: 2.5%)	661	UY74C	9T10C1184G02
		112.5	(+2, -4: 2.5%)	790	DY75C	9T10C1185G02
		225	(+2, -4: 2.5%)	1610	DY77C	9T10C1187G02

115°C Rise 60Hz Low Noise (-3dB) copper three-phase

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	240/120	75	(+2, -4: 2.5%)	748	UX74C	9T10C1184G32
		112.5	(+2, -4: 2.5%)	900	DX75C	9T10C1185G32

80°C Rise 60Hz Low Noise (-3dB) copper three-phase

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	240/120	15	(+2, -4: 2.5%)	353	UX72C	9T10C1181G62
		30	(+2, -4: 2.5%)	480	UX73C	9T10C1182G62
		75	(+2, -4: 2.5%)	790	DY75C	9T10C1184G62
		150	(+2, -4: 2.5%)	1610	DY77C	9T10C1186G62

Drive isolation

Product overview

Drive isolation

The use of thyristor control circuitry with adjustable-speed drives has resulted in a need for a line of isolation transformers specifically designed to meet the demanding power supply requirements of thyristor controlled drives. Symmetrically placed taps and added coil bracing minimize mechanical forces caused by the often severe thyristor drive duty cycles. These reinforcing features also help protect the transformer from the regenerative duty cycles and more frequent temporary short-circuits associated with thyristor drives.

Isolation transformers also reduce line-pollution feedback resulting from thyristor firing circuits. The ABB delta-wye designs meet the NEC requirements for grounded secondary neutrals that isolate primary distribution systems. kVA ratings of the DIT line cover most dc motor requirements from 3 to 1000 hp.

The enclosed drive isolation transformers are UL listed and are excluded from the DOE 2016 regulations.

Features

- Unique core and coil design using grain-oriented silicon steel
- Core and coil assemblies mounted on rubber isolation pads
- Single piece front/back
- Lug kit included up through 145 kVA
- Copper ground bar kit included up through 145 kVA
- Copper ground strap

Drive isolation

15 - 220 kVA Indoor Type QL UL Listed aluminum three-phase

Input voltage	Output voltage	kVA	Frequency (Hz)	Weight (Lbs)	Frame size	Ordering code
230 Volts Delta	230Y/133 Volts	15	60Hz	240	XV371	9T83B4000G29
		20	60Hz	334	XV372	9T83B4001G29
		27	60Hz	334	XV372	9T83B4002G29
		34	60Hz	334	XV373	9T83B4003G29
		40	60Hz	415	XV373	9T83B4004G29
		51	60Hz	415	XV373	9T83B4005G29
		75	60Hz	620	XV374	9T83B4007G29
		93	60Hz	765	XV375	9T83B4008G29
		118	60Hz	1070	XV376	9T83B4009G29
230 Volts Delta	460Y/266 Volts	15	60Hz	240	XV371	9T83B4000G28
		20	60Hz	334	XV372	9T83B4001G28
		27	60Hz	334	XV372	9T83B4002G28
		34	60Hz	334	XV372	9T83B4003G28
		63	60Hz	620	XV374	9T83B4006G28
		93	60Hz	765	XV375	9T83B4008G28
		118	60Hz	1070	XV376	9T83B4009G28
		145	60Hz	1070	XV376	9T83B4010G28
		175	60Hz	1590	XV377	9T83B4011G28
460 Volts Delta	230Y/133	15	60 Hz	240	XV371	9T83B4000G23
		20	60 Hz	334	XV372	9T83B4001G23
		27	60 Hz	334	XV372	9T83B4002G23
		34	60 Hz	415	XV373	9T83B4003G23
		40	60 Hz	415	XV373	9T83B4004G23
		51	60 Hz	415	XV373	9T83B4005G23
		63	60 Hz	620	XV374	9T83B4006G23
		75	60 Hz	620	XV374	9T83B4007G23
		93	60 Hz	765	XV375	9T83B4008G23
		118	60 Hz	1070	XV376	9T83B4009G23
		145	60 Hz	1070	XV376	9T83B4010G23
		220	60 Hz	1590	XV377	9T83B4012G23
460 Volts Delta	460Y/266	15	60 Hz	240	XV371	9T83B4000G22
		20	60 Hz	334	XV372	9T83B4001G22
		27	60 Hz	334	XV372	9T83B4002G22
		34	60 Hz	415	XV373	9T83B4003G22
		40	60 Hz	415	XV373	9T83B4004G22
		51	60 Hz	415	XV373	9T83B4005G22
		63	60 Hz	620	XV374	9T83B4006G22
		75	60 Hz	620	XV374	9T83B4007G22
		93	60 Hz	765	XV375	9T83B4008G22
		118	60 Hz	1070	XV376	9T83B4009G22
		145	60 Hz	1070	XV376	9T83B4010G22
		175	60 Hz	1590	XV377	9T83B4011G22
		220	60 Hz	1590	XV377	9T83B4012G22
575 Volts Delta	230Y/133	20	60 Hz	334	XV372	9T83B4001G27
		63	60 Hz	620	XV374	9T83B4006G27
		75	60 Hz	620	XV374	9T83B4007G27
		118	60 Hz	1070	XV376	9T83B4009G27
575 Volts Delta	460Y/266	15	60 Hz	240	XV371	9T83B4000G26
		27	60 Hz	324	XV372	9T83B4002G26
		34	60 Hz	415	XV373	9T83B4003G26
		51	60 Hz	620	XV374	9T83B4005G26
		145	60 Hz	1070	XV376	9T83B4010G26
		175	60 Hz	1590	XV377	9T83B4011G26
		220	60 Hz	1590	XV377	9T83B4012G26

NOTE: Full capacity symmetrical taps (1) +5% and (1) –5%, in primary windings for 230 and 460 Y thru 550 kVA; (1) +6.2% and (1) –6.2% at 750 kVA; (1) +6.4% and (1) –6.4%) at 1000 kVA. With 575 V primary, symmetrical 5% taps apply thru 750 kVA; at 1000 kVA, (1) +5.1% and (1) –5.1%. For ratings less than 15 kV contact ABB Sales Office.

Totally enclosed, nonventilated (TENV)

Product overview

TENV Transformer

Totally enclosed nonventilated (TENV) transformers are an excellent choice for applications where dry-type transformer benefits are desired but the standard enclosure openings are unacceptable because of adverse atmospheric conditions. TENV transformers are recommended where dust, dirt or lint may be present or where transformers are subject to sprays or controlled washdown conditions. They are UL Listed through 75 kVA for indoor or protected outdoor applications. TENV are excluded from DOE 2016 regulations.

Features

- Quiet design - unique core and coil design makes ABB TENV transformers among the quietest available
- Core and coil assembly mounted on rubber isolation pads to reduce noise
- Bolted coil terminations are more reliable than welded terminations, and they eliminate weld failures and problems associated with welding and weld splatter
- 100% factory tested for shorts and coil integrity, current and loss, voltage, impedance and noise
- Qualified to the seismic requirements of IEEE-693-2005 and IBC 2021/CBC 2022
- Copper ground strap
- Copper or aluminum windings available
- Available in 150°C, 115°C, and 80°C rise models
- Indoor or outdoor use
- NEMA 3R enclosure

Totally enclosed, nonventilated (TENV)

Aluminum 150°C Rise three-phase NEMA TP-1 efficiency

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	208Y/120	15	(+2, -4: 2.5%)	370	XV372	9T85B3871
		30	(+2, -4: 2.5%)	450	XV373	9T85B3872
		45	(+2, -4: 2.5%)	670	XV374	9T85B3873
		75	(+2, -4: 2.5%)	815	XV375	9T85B3874

Aluminum 115°C Rise three-phase NEMA TP-1 efficiency

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	208Y/120	15	(+2, -4: 2.5%)	370	XV372	9T85B3871G15
		30	(+2, -4: 2.5%)	450	XV373	9T85B3872G15
		45	(+2, -4: 2.5%)	670	XV374	9T85B3873G15
		75	(+2, -4: 2.5%)	815	XV375	9T85B3874G15

Aluminum 80°C Rise three-phase NEMA TP-1 efficiency

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	208Y/120	30	(+2, -4: 2.5%)	670	XV374	9T85B3872G80

Copper 150°C Rise three-phase NEMA TP-1 efficiency

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	208Y/120	15	(+2, -4: 2.5%)	410	XV372	9T85C9871
		30	(+2, -4: 2.5%)	525	XV373	9T85C9872
		45	(+2, -4: 2.5%)	760	XV374	9T85C9873
		75	(+2, -4: 2.5%)	1000	XV375	9T85C9874

Copper 115°C Rise three-phase NEMA TP-1 efficiency

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	208Y/120	15	(+2, -4: 2.5%)	410	XV372	9T85C9871G15
		30	(+2, -4: 2.5%)	525	XV373	9T85C9872G15
		45	(+2, -4: 2.5%)	760	XV374	9T85C9873G15
		75	(+2, -4: 2.5%)	1000	XV375	9T85C9874G15

Copper 80°C Rise three-phase NEMA TP-1 efficiency

Input voltage	Output voltage	kVA	Taps	Net weight (Lbs)	Frame size	Ordering code
480	208Y/120	15	(+2, -4: 2.5%)	410	XV372	9T85C9871G80
		45	(+2, -4: 2.5%)	760	XV374	9T85C9873G80

Servicenter™ integrated transformer and distribution panels

Product overview

Single-Phase Servicenter™

Three-Phase Servicenter™

Product description

Available in single-phase, 5 through 25 kVA, and in three-phase, 15 through 30 kVA, 600 Volt class ratings, the ABB Servicenter™ is a convenient, economical way to meet your industrial and temporary power requirements. The single-phase Servicenter™ can be used wherever 480 Volt power is available and 120 or 240 Volt branch circuits are required. The three-phase Servicenter™ can be used wherever 240 Volt, 480 Volt or 600 Volt primary is available and 208Y/120 Volt secondary circuits are required.

Key features

- Keyhole mounting flange facilitates easy mounting
- Indoor and outdoor use
- Front-accessible, hinged or removable panel door is safe and convenient
- Heat barrier under core and coil provides electrical and thermal isolation for wiring compartment
- High-efficiency core construction results in quiet transformer operation and low no-load losses
- Factory installed and wired ABB main and secondary main circuit breakers

Servicenter™ integrated transformer and distribution panels

Single-phase Servicenter™

Single-Phase Indoor/Outdoor 60 Hz 115°C Winding Temperature

Input voltage	Output voltage	kVA	Max. branch spaces 1 THQL, 1-pole	Max. branch spaces 1 THQL, 2-pole	Total 1-pole spaces	Breaker rating-primary main	Breaker rating-secondary main	Ordering code
480 Volts Delta	120/240 Volts	5	6	3	12	25A	30A	9T21S1050
		7.5	6	3	12	35A	40A	9T21S1070
		10	8	4	16	50A	50A	9T21S1100
		15	12	6	24	60A	70A	9T21S1150
		25	20	10	24	100A	150A	9T21S1250

Three-phase Servicenter™

Three-Phase[2] Indoor/Outdoor 60 Hz[1] 150°C DOE 2016 Efficiency Aluminum Transformer Windings

Input voltage	Output voltage	kVA	Max. branch spaces 1 THQL, 1-pole	Max. branch spaces 1 THQL, 2-pole	Total 1-pole spaces	Breaker rating-primary main	Breaker rating-secondary main	Ordering code
240 Volts Delta	208Y/120 Volts	15	12	4	12	100A	50A	9T17A0001
		30	24	8	24	100A	100A	9T17A0003
480 Volts Delta	208Y/120 Volts	15	12	4	12	40A	50A	9T17A0011
		22.5	18	6	18	70A	70A	9T17A0012
		30	24	8	24	90A	100A	9T17A0013
600 Volts Delta	208Y/120 Volts	15	12	4	12	40A	50A	9T17A0021
		30	24	8	24	40A	100A	9T17A0023

Three-Phase[2] Indoor/Outdoor 60 Hz[1] 150°C DOE 2016 Efficiency Copper Transformer Windings

Input voltage	Output voltage	kVA	Max. branch spaces 1 THQL, 1-pole	Max. branch spaces 1 THQL, 2-pole	Total 1-pole spaces	Breaker rating-primary main	Breaker rating-secondary main	Ordering code
240 Volts Delta	208Y/120 Volts	15	12	4	12	100A	50A	9T17C0004
480 Volts Delta	208Y/120 Volts	15	12	4	12	40A	50A	9T17C0014
		22.5	18	6	18	70A	70A	9T17C0015
		30	24	8	24	90A	100A	9T17C0016

[1] (3) 5% taps 1 above and 2 below rated primary volts.
[2] Stainless steel (Type 316) enclosures are available as an engineered made to order item.

Accessories and lugs

Single-phase and three-phase

Painted parts

Frame size	Rain shield kit Ordering code	Lug kit Ordering code	Ground kit Ordering code	Wall mount bracket Ordering code	Bottom pan Ordering code
DX74C	9T18Y1074G06	9T18Y1074G10	9T18Y1074G11	9T18Y1074G07	–
DX75A	9T18Y1076G06	9T18Y1076G10	9T18Y1074G11	–	–
DX75C	9T18Y1074G06	9T18Y1075G10	9T18Y1074G11	9T18Y1074G07	–
DX76A	9T18Y1077G06	9T18Y1077G10	–	–	9T18Y1077G09
DX76C	9T18Y1076G06	9T18Y1076G10	9T18Y1074G11	–	–
DX77A	9T18Y1077G06	9T18Y1077G10	–	–	9T18Y1077G09
DX77C	9T18Y1077G06	9T18Y1077G10	–	–	9T18Y1077G09
DX78A	9T18Y1077G06	9T18Y1078G10	–	–	9T18Y1078G09
DX78C	9T18Y1077G06	9T18Y1078G10	–	–	9T18Y1078G09
DX79A	9T18Y1079G06	9T18Y1079G10	–	–	9T18Y1079G09
DX79C	9T18Y1079G06	9T18Y1079G10	–	–	9T18Y1079G09
DY05A	9T18Y1074G06	9T18Y1075G10	9T18Y1074G11	9T18Y1074G07	–
DY05C	9T18Y1074G06	9T18Y1075G10	9T18Y1074G11	9T18Y1074G07	–
DY08A	9T18Y1077G06	9T18Y1078G10	–	–	9T18Y1078G09
DY17A	9T18Y1077G06	9T18Y1077G10	–	–	9T18Y1077G09
DY67A	9T18Y1067G06	9T18Y1067G10	–	–	9T18Y1067G09
DY75A	9T18Y1074G06	9T18Y1075G10	9T18Y1074G11	9T18Y1074G07	–
DY75C	9T18Y1074G06	9T18Y1075G10	9T18Y1074G11	9T18Y1074G07	–
DY76A	9T18Y1076G06	9T18Y1076G10	9T18Y1074G11	–	–
DY76C	9T18Y1076G06	9T18Y1076G10	9T18Y1074G11	–	–
DY77A	9T18Y1077G06	9T18Y1077G10	–	–	9T18Y1077G09
DY77C	9T18Y1077G06	9T18Y1077G10	–	–	9T18Y1077G09
DY78A	9T18Y1077G06	9T18Y1078G10	–	–	9T18Y1078G09
DY78C	9T18Y1077G06	9T18Y1078G10	–	–	9T18Y1078G09
DY79A	9T18Y1079G06	9T18Y1079G10	–	–	9T18Y1079G09
H371C	9T18Y4317G05	–	–	–	–
H372C	9T18Y4317G06	–	–	–	–
H373C	9T18Y4317G06	–	–	–	–
H374C	9T18Y4317G06	–	–	–	–
H375C	9T18Y4322G88	–	–	–	9T18Y4504G79
H376C	9T18Y4322G88	–	–	–	9T18Y4504G79
UX02C	9T18Y1072G06	9T18Y1072G10	9T18Y1071G11	9T18Y1071G07	–
UX71A	9T18Y1071G06	9T18Y1071G10	9T18Y1071G11	9T18Y1071G07	–
UX71C	9T18Y1071G06	9T18Y1071G10	9T18Y1071G11	9T18Y1071G07	–
UX72A	9T18Y1072G06	9T18Y1072G10	9T18Y1071G11	9T18Y1071G07	–
UX72C	9T18Y1072G06	9T18Y1072G10	9T18Y1071G11	9T18Y1071G07	–
UX73A	9T18Y1072G06	9T18Y1072G10	9T18Y1071G11	9T18Y1071G07	–
UX73C	9T18Y1072G06	9T18Y1072G10	9T18Y1071G11	9T18Y1071G07	–
UX74A	9T18Y1074G06	9T18Y1074G10	9T18Y1074G11	9T18Y1074G07	–
UX74C	9T18Y1074G06	9T18Y1074G10	9T18Y1074G11	9T18Y1074G07	–
UY03A	9T18Y1072G06	9T18Y1072G10	9T18Y1071G11	9T18Y1071G07	–
UY14A	9T18Y1074G06	9T18Y1074G10	9T18Y1074G11	9T18Y1074G07	–
UY14C	9T18Y1074G06	9T18Y1074G10	9T18Y1074G11	9T18Y1074G07	–
UY72A	9T18Y1072G06	9T18Y1072G10	9T18Y1071G11	9T18Y1071G07	–
UY74A	9T18Y1074G06	9T18Y1074G10	9T18Y1074G11	9T18Y1074G07	–
UY74C	9T18Y1074G06	9T18Y1074G10	9T18Y1074G11	9T18Y1074G07	–
XV173	9T18Y1074G06	9T18Y7241G03	–	–	–
XV371	9T18Y4317G11	9T18Y7327	–	–	–
XV372	9T18Y4317G05	9T18Y7240	–	–	–
XV373	9T18Y4317G05	9T18Y7240	–	–	–
XV374	9T18Y4317G06	9T18Y7241	–	–	–
XV375	9T18Y4317G06	9T18Y7242	–	–	–
XV376	9T18Y4317G07	9T18Y7242G03	–	–	–
XV377	9T18Y4322G88	9T18Y7242G02	–	–	9T18Y4504G79
YF378	9T18Y4322G88	–	–	–	9T18Y4504G79
YX171	9T18Y1072G06	9T18Y7240G02	–	9T18Y1071G07	–
YX172	9T18Y1074G06	9T18Y7240G02	–	9T18Y1074G07	–
YX174	9T18Y1074G06	9T18Y7241G03	–	9T18Y1074G07	–
YX175	9T18Y4322G77	9T18Y7240G03	–	–	9T18Y4504G77

Accessories and lugs

Single-phase and three-phase

Stainless steel parts

Frame size	Rain shield kit Ordering code	Lug kit Ordering code	Ground kit Ordering code	Wall mount bracket Ordering code	Bottom pan Ordering code
DX74C	9T18Y1174G06	9T18Y1074G10	9T18Y1074G11	–	–
DX75A	9T18Y1176G06	9T18Y1076G10	9T18Y1074G11	–	–
DX75C	9T18Y1174G06	9T18Y1075G10	9T18Y1074G11	9T18Y1074G07	–
DX76C	9T18Y1176G06	9T18Y1076G10	9T18Y1074G11	–	–
DY05C	9T18Y1174G06	9T18Y1075G10	9T18Y1074G11	–	–
DY75A	9T18Y1174G06	9T18Y1075G10	9T18Y1074G11	–	–
DY75C	9T18Y1174G06	9T18Y1075G10	9T18Y1074G11	–	–
DY76A	9T18Y1176G06	9T18Y1076G10	9T18Y1074G11	–	–
DY76C	9T18Y1176G06	9T18Y1076G10	9T18Y1074G11	–	–
UX71A	9T18Y1171G06	9T18Y1071G10	9T18Y1071G11	–	–
UX71C	9T18Y1171G06	9T18Y1071G10	9T18Y1071G11	–	–
UX72A	9T18Y1172G06	9T18Y1072G10	9T18Y1071G11	9T18Y1071G07	–
UX72C	9T18Y1172G06	9T18Y1072G10	9T18Y1071G11	–	–
UX73A	9T18Y1172G06	9T18Y1072G10	9T18Y1071G11	–	–
UX73C	9T18Y1172G06	9T18Y1072G10	9T18Y1071G11	–	–
UX74A	9T18Y1174G06	9T18Y1074G10	9T18Y1074G11	9T18Y1074G07	–
UX74C	9T18Y1174G06	9T18Y1074G10	9T18Y1074G11	9T18Y1074G07	–
UY14A	9T18Y1174G06	9T18Y1074G10	9T18Y1074G11	–	–
UY14C	9T18Y1174G06	9T18Y1074G10	9T18Y1074G11	–	–
UY72A	9T18Y1172G06	9T18Y1072G10	9T18Y1071G11	–	–
UY74A	9T18Y1174G06	9T18Y1074G10	9T18Y1074G11	9T18Y1074G07	–
UY74C	9T18Y1174G06	9T18Y1074G10	9T18Y1074G11	–	–

Lug kit details

Single-phase and three-phase

Lug connector kits are readily available and can be ordered through the sales office, through the distributor, or can be purchased commercially. Lug kit and ground bar kits are included in most units up through 150 kVA.

				Specified lug kit									
	Bus bar holes			Lug size #1 (primary)			Lug size #2 (secondary)			Lug size #3 (X0)			
Frame size	Primary (available hole) and size	Secondary (available hole) and size	Kit number	Qty	Conductor size[1]	Stud hole size[2] (in.)	Qty	Conductor size[1]	Stud hole size[2] (in.)	Qty	Conductor size[1]	Stud hole size[2] (in.)	Notes
DX75A	(1) .563 dia	(2) .563 dia	9T18Y1075G10	3	6 awg to 350 mcm	3/8	3	3 awg to 350 mcm	3/8	1	3 awg to 350 mcm	3/8	
DX76A	(4) .563 dia	(4) .563 dia	9T18Y1077G10	6	6 awg to 350 mcm	3/8	6	4 awg to 500 mcm	3/8	2	4 awg to 500 mcm	3/8	
DX77A	(4) .563 dia	(4) .563 dia	9T18Y1077G10	6	6 awg to 350 mcm	3/8	6	4 awg to 500 mcm	3/8	2	4 awg to 500 mcm	3/8	
DX78A	(4) .563 dia	(4) .563 dia	9T18Y1078G10	6	6 awg to 350 mcm	3/8	6	2 awg to 600 mcm	3/8	2	4 awg to 500 mcm	3/8	
DX79A	(4) .563 dia	(6) .563 dia	9T18Y1079G10	9	6 awg to 350 mcm	3/8	18	4 awg to 500 mcm	3/8	8	4 awg to 500 mcm	3/8	
DY05C	(1) .563 dia	(2) .563 dia	9T18Y1075G10	3	6 awg to 350 mcm	3/8	3	3 awg to 350 mcm	3/8	1	3 awg to 350 mcm	3/8	
DY17A	(4) .563 dia	(4) .563 dia	9T18Y1077G10	6	6 awg to 350 mcm	3/8	6	4 awg to 500 mcm	3/8	2	4 awg to 500 mcm	3/8	
DY67A	(6) .563 dia	(6) .563 dia	9T18Y1067G10	12	4 awg to 500 mcm	3/8	33	4 awg to 500 mcm	3/8	11	4 awg to 500 mcm	3/8	
DY75A or C	(1) .563 dia	(2) .563 dia	9T18Y1075G10	3	6 awg to 350 mcm	3/8	3	3 awg to 350 mcm	3/8	1	3 awg to 350 mcm	3/8	
DY76A or C	(1) .563 dia	(2) .563 dia	9T18Y1076G10	3	6 awg to 350 mcm	3/8	3	4 awg to 500 mcm	3/8	1	4 awg to 500 mcm	3/8	
DY77A or C	(4) .563 dia	(4) .563 dia	9T18Y1077G10	6	6 awg to 350 mcm	3/8	6	4 awg to 500 mcm	3/8	2	4 awg to 500 mcm	3/8	
DY78A or C	(4) .563 dia	(4) .563 dia	9T18Y1078G10	6	6 awg to 350 mcm	3/8	6	2 awg to 600 mcm	3/8	2	4 awg to 500 mcm	3/8	
DY79A	(4) .563 dia	(6) .563 dia	9T18Y1079G10	9	6 awg to 350 mcm	3/8	18	4 awg to 500 mcm	3/8	8	4 awg to 500 mcm	3/8	
UX02C	(1) .406 dia	(1) .406 dia	9T18Y1072G10	3	6 awg to 250 mcm	5/16	3	6 awg to 250 mcm	5/16	1	6 awg to 250 mcm	5/16	1
UX71A or C	(1) .406 dia	(1) .406 dia	9T18Y1071G10	3	14 awg to 1/0 awg	1/4	3	14 awg to 1/0 awg	1/4	1	14 awg to 1/0 awg	1/4	1
UX72A or C	(1) .406 dia	(1) .406 dia	9T18Y1072G10	3	6 awg to 250 mcm	5/16	3	6 awg to 250 mcm	5/16	1	6 awg to 250 mcm	5/16	1
UX73A or C	(1) .406 dia	(1) .406 dia	9T18Y1072G10	3	6 awg to 250 mcm	5/16	3	6 awg to 250 mcm	5/16	1	6 awg to 250 mcm	5/16	1
UX74A or C	(2) .406 dia	(2) .406 dia	9T18Y1074G10	3	6 awg to 250 mcm	5/16	6	6 awg to 350 mcm	3/8	2	6 awg to 250 mcm	5/16	
UY03A	(1) .406 dia	(1) .406 dia	9T18Y1072G10	3	6 awg to 250 mcm	5/16	3	6 awg to 250 mcm	5/16	1	6 awg to 250 mcm	5/16	1
UY14A or C	(2) .406 dia	(2) .406 dia	9T18Y1074G10	3	6 awg to 250 mcm	5/16	6	6 awg to 350 mcm	3/8	2	6 awg to 250 mcm	5/16	
UY72A	(1) .406 dia	(1) .406 dia	9T18Y1072G10	3	6 awg to 250 mcm	5/16	3	6 awg to 250 mcm	5/16	1	6 awg to 250 mcm	5/16	1
UY74A or C	(2) .406 dia	(2) .406 dia	9T18Y1074G10	3	6 awg to 250 mcm	5/16	6	6 awg to 350 mcm	3/8	2	6 awg to 250 mcm	5/16	
XV371	(1) .406 dia	(1) .406 dia	9T18Y7327	3	14 awg to 1/0 awg	1/4	3	14 awg to 1/0 awg	1/4	1	14 awg to 1/0 awg	1/4	1
XV372	(1) .406 dia	(1) .406 dia	9T18Y7240	3	6 awg to 250 mcm	5/16	3	6 awg to 250 mcm	5/16	1	6 awg to 250 mcm	5/16	1
XV373	(1) .406 dia	(1) .406 dia	9T18Y7240	3	6 awg to 250 mcm	5/16	3	6 awg to 250 mcm	5/16	1	6 awg to 250 mcm	5/16	1
XV374	(2) .406 dia	(2) .406 dia	9T18Y7241	3	6 awg to 250 mcm	5/16	6	6 awg to 350 mcm	3/8	2	6 awg to 350 mcm	3/8	
XV375	(1) .563 dia	(2) .563 dia	9T18Y7243	3	6 awg to 350 mcm	3/8	3	2 awg to 600 mcm	3/8	1	2 awg to 600 mcm	3/8	
XV376	(1) .563 dia	(2) .563 dia	9T18Y7242G03	3	6 awg to 350 mcm	3/8	6	4 awg to 500 mcm	3/8	2	4 awg to 500 mcm	3/8	
XV377	(2) .563 dia	(4) .563 dia	9T18Y7242G02	6	6 awg to 350 mcm	3/8	12	6 awg to 350 mcm	3/8	4	6 awg to 350 mcm	3/8	

[1] Recommended maximum cable range
[2] Screws: 1/4" = 1" long, 5/16 and 3/8 = 1 1/2" long
Note Number 1: Proximity of bus bars would prohibit dual lugs per bus bar

Enclosure parts

Frame size	Enclosure kits Ordering code	Front/back panel Ordering code	Side panel Ordering code	Cover (top) Ordering code
DX74C	9T18Y1074G01	9T18Y1074G03	9T18Y1074G04	9T18Y1074G05
DX75A	9T18Y1076G01	9T18Y1076G03	9T18Y1076G04	9T18Y1076G05
DX75C	9T18Y1075G01	9T18Y1075G03	9T18Y1075G04	9T18Y1074G05
DX76A	9T18Y1077G01	9T18Y1077G03	9T18Y1077G04	9T18Y1077G05
DX76C	9T18Y1076G01	9T18Y1076G03	9T18Y1076G04	9T18Y1076G05
DX77A	9T18Y1077G01	9T18Y1077G03	9T18Y1077G04	9T18Y1077G05
DX77C	9T18Y1077G01	9T18Y1077G03	9T18Y1077G04	9T18Y1077G05
DX78A	9T18Y1078G01	9T18Y1078G03	9T18Y1078G04	9T18Y1078G05
DX78C	9T18Y1078G01	9T18Y1078G03	9T18Y1078G04	9T18Y1078G05
DX79A	9T18Y1079G01	9T18Y1079G03	9T18Y1079G04	9T18Y1079G05
DX79C	9T18Y1079G01	9T18Y1079G03	9T18Y1079G04	9T18Y1079G05
DY05A	9T18Y1075G01	9T18Y1075G03	9T18Y1075G04	9T18Y1074G05
DY05C	9T18Y1075G01	9T18Y1075G03	9T18Y1075G04	9T18Y1074G05
DY08A	9T18Y1078G01	9T18Y1078G03	9T18Y1078G04	9T18Y1078G05
DY17A	9T18Y1077G01	9T18Y1077G03	9T18Y1077G04	9T18Y1077G05
DY67A	–	9T18Y1067G03	9T18Y1067G04	9T18Y1067G05
DY75A	9T18Y1075G01	9T18Y1075G03	9T18Y1075G04	9T18Y1074G05
DY75C	9T18Y1075G01	9T18Y1075G03	9T18Y1075G04	9T18Y1074G05
DY76A	9T18Y1076G01	9T18Y1076G03	9T18Y1076G04	9T18Y1076G05
DY76C	9T18Y1076G01	9T18Y1076G03	9T18Y1076G04	9T18Y1076G05
DY77A	9T18Y1077G01	9T18Y1077G03	9T18Y1077G04	9T18Y1077G05
DY77C	9T18Y1077G01	9T18Y1077G03	9T18Y1077G04	9T18Y1077G05
DY78A	9T18Y1078G01	9T18Y1078G03	9T18Y1078G04	9T18Y1078G05
DY78C	9T18Y1078G01	9T18Y1078G03	9T18Y1078G04	9T18Y1078G05
DY79A	9T18Y1079G01	9T18Y1079G03	9T18Y1079G04	9T18Y1079G05
H371C	9T18Y4412G01	9T18Y4412G03	9T18Y4412G04	9T18Y4412G05
H372C	9T18Y4413G01	9T18Y4413G03	9T18Y4413G04	9T18Y4413G05
H373C	9T18Y4413G01	9T18Y4413G03	9T18Y4413G04	9T18Y4413G05
H374C	9T18Y4414G01	9T18Y4414G03	9T18Y4414G04	9T18Y4413G05
H375C	9T18Y4506G79	9T18Y4502G79	9T18Y4505G79	9T18Y4501G79
H376C	9T18Y4506G79	9T18Y4502G79	9T18Y4505G79	9T18Y4501G79
UX02C	9T18Y1072G01	9T18Y1072G03	9T18Y1072G04	9T18Y1072G05
UX71A	9T18Y1071G01	9T18Y1071G03	9T18Y1071G04	9T18Y1071G05
UX71C	9T18Y1071G01	9T18Y1071G03	9T18Y1071G04	9T18Y1071G05
UX72A	9T18Y1072G01	9T18Y1072G03	9T18Y1072G04	9T18Y1072G05
UX72C	9T18Y1072G01	9T18Y1072G03	9T18Y1072G04	9T18Y1072G05
UX73A	9T18Y1072G01	9T18Y1072G03	9T18Y1072G04	9T18Y1072G05
UX73C	–	9T18Y1072G03	9T18Y1072G04	9T18Y1072G05
UX74A	9T18Y1074G01	9T18Y1074G03	9T18Y1074G04	9T18Y1074G05
UX74C	9T18Y1074G01	9T18Y1074G03	9T18Y1074G04	9T18Y1074G05
UY03A	9T18Y1072G01	9T18Y1072G03	9T18Y1072G04	9T18Y1072G05
UY14A	9T18Y1074G01	9T18Y1074G03	9T18Y1074G04	9T18Y1074G05
UY14C	9T18Y1074G01	9T18Y1074G03	9T18Y1074G04	9T18Y1074G05
UY72A	9T18Y1072G01	9T18Y1072G03	9T18Y1072G04	9T18Y1072G05
UY74A	9T18Y1074G01	9T18Y1074G03	9T18Y1074G04	9T18Y1074G05
UY74C	9T18Y1074G01	9T18Y1074G03	9T18Y1074G04	9T18Y1074G05
XV173	9T18Y1074G01	9T18Y1074G03	9T18Y1074G04	9T18Y1074G05
XV371	9T18Y4421G01	9T18Y4421G03	9T18Y4421G04	9T18Y4421G05
XV372	9T18Y4412G01	9T18Y4412G03	9T18Y4412G04	9T18Y4412G05
XV373	9T18Y4412G01	9T18Y4412G03	9T18Y4412G04	9T18Y4412G05
XV374	9T18Y4413G01	9T18Y4413G03	9T18Y4413G04	9T18Y4413G05
XV375	9T18Y4414G01	9T18Y4414G03	9T18Y4414G04	9T18Y4413G05
XV376	9T18Y4415G01	9T18Y4415G03	9T18Y4415G04	9T18Y4415G06
XV377	9T18Y4506G79	9T18Y4502G79	9T18Y4505G79	9T18Y4501G79
YF378	9T18Y4506G88	9T18Y4502G88	9T18Y4505G88	9T18Y4501G79
YX171	9T18Y1072G01	9T18Y1072G03	9T18Y1072G04	9T18Y1072G05
YX172	9T18Y1074G01	9T18Y1074G03	9T18Y1074G04	9T18Y1074G05
YX174	9T18Y1075G01	9T18Y1075G03	9T18Y1075G04	9T18Y1074G05
YX175	9T18Y4506G77	9T18Y4502G77	9T18Y4505G77	9T18Y4501G77

Enclosure parts

Totally enclosed non-ventilated

Frame size	Enclosure kits Ordering code	Front/back panel Ordering code	Side panel Ordering code	Cover (top) Ordering code
XV372	9T18Y4772G01	9T18Y4772G03	9T18Y4412G04	9T18Y4412G05
XV373	9T18Y4772G01	9T18Y4772G03	9T18Y4412G04	9T18Y4412G05
XV374	9T18Y4774G01	9T18Y4774G03	9T18Y4413G04	9T18Y4413G05
XV375	9T18Y4775G01	9T18Y4775G03	9T18Y4414G04	9T18Y4413G05

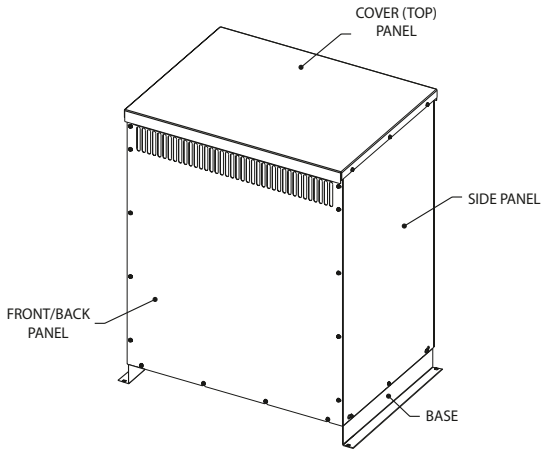

ENCLOSURE KIT: 1 COVER + 2 SIDES + 2 FRONTS

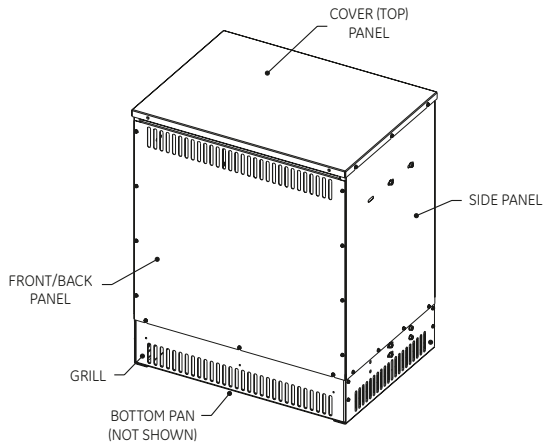

ENCLOSURE KIT: 1 COVER + 2 SIDES + 2 FRONTS

This style enclosure is used with the following frames:

Frame size	Frame size
UX71A	UY74C
UX71C	UX74C
UX72A	DY75A
UX72C	DY75C
UX73A	DX75A
UX73C	DX75C
UY74A	DY76A
UX74A	DY76C

This style enclosure is used with the following frames:

Frame size	Frame size
DX76A	DX79A
DX76C	DX79C
DX77A	YF171
DX77C	YF172
DY77A	YF173
DY77C	YF174
DY78C	YF175
DY78A	YF176
DX78A	YF177
DX78C	-

General and technical information

Small power transformers
600 volts and below

Construction – Type IP, QB and QMS
Small power transformers - Type IP
Type IP small power transformers are broken down into two categories - Machine Tool and Control Power. All are manufactured using copper windings and are UL and cUL Listed. Machine Tool transformers are used when higher inrush currents are required to drive more peak power demanding loads.

Small power transformers - Types QB and QMS
QB and QMS small power transformers come standard in NEMA 3R nonventilated weatherproof enclosures. Type QB and QMS units feature encapsulated copper core and coils with integrated junction boxes for easy wiring.

Termination
Improved termination spacing and wiring compartment room gives greater flexibility in selecting various UL listed connectors for either copper or aluminum cable.

Applicable standards
Types QB and QMS are UL and cUL Listed XPTQ.E323774 and XPTQ7.E323774.

Type IP transformers are UL and cUL listed XPTQ.E323774 and XPTQ7.E323774.

ISO 9001:2015
BUREAU VERITAS
Certification

an ISO

Core and coil transformer terminal with fuse block

Core and coil transformer terminal block

Type QB, .050 kVA-3 kVA, Single-phase

Type QMS, 5 kVA-25 kVA, Single-phase

Open core and coil transformers

Machine tool and control power

Product description
Core and coil transformers for machine tools are used to provide voltage to control devices in applications where regulation and minimum space are important. Welded cores provide the highest quality electrical performance and quiet operation.

Standards: Type IP transformers conform to NEMA ST20

Listings: UL listed under UL-5085, File E2739 and E323774

Insulation classes: 150VA and below: 105°C insulation class, 55°C Rise
200VA and above: 185°C (NEMA) 180°C (UL) insulation class, 115°C Rise

Voltage regulation: All designs 2.0 kVA and below are compensated for voltage drop. Compensation ranges from 10% in the smallest rating to 3% for the largest. All machine tool designs meet or exceed NMTBA regulation requirements.

Series-multiple secondary connections: Transformers with 120/240 V secondaries (series-multiple) may be connected for 120 V, 240 V or 240/120 V three-wire. Jumpers are provided.

Overcurrent protection: Type IP transformers are low impedance transformers that require overcurrent protection for most applications. They provide for optional integral primary and/or secondary fusing.

Mounting dimensions: Type IP transformers are lightweight, small, and designed for minimum mounting dimensions. Many units will fit competitors mounting footprints.

Core and coil transformer terminal with fuse block

Core and coil transformer terminal block

Advantages
- Finger-safe terminals offer added protection and safety
- Pressure plate terminals ensure secure connections
- Wide variety of fusing options. See page 10B-9.

Key features—terminal block
- Rugged, high-impact plastic terminal block
- Full head #8 brass screws assure quick, easy terminations with maximum connection integrity
- Copper windings
- Flexible design allows input or output voltage to match any application
- CUL, UL approvals
- CE approved on page 10B-12
- Available fuse-blocks offer simple, low-cost fusing

Open core and coil transformers

Machine tool applications

Single-phase, fully-encapsulated design

60 Hz Terminal block

Input voltage	Output voltage	kVA	Wiring diagram no.[1]	Approx. net weight (lbs.)	Frame size	Ordering code
220x440, 230x460,240x480 Volts	110, 115, 120 Volts	0.05	1	2.4	6100	9T58K0042
		0.08	1	2.8	6125	9T58K0043
		0.10	1	3.6	8100	9T58K0044
		0.15	1	5.1	8150	9T58K0045
		0.20	1	5.8	8175	9T58K0046
		0.25	1	6.5	8200	9T58K0047
		0.30	1	7.6	8250	9T58K0048
		0.38	1	7.6	8250	9T58K0049
		0.50	1	10.7	10225	9T58K0050
		0.75	1	12	12225	9T58K0051
		1	1	16.1	12300	9T58K0052
		2	1	26.7	14225	9T58K0053
		2	1	32.7	14300	9T58K0054
		3	1	47.4	14475	9T58K0055

50/60 Hz Terminal block

Input voltage	Output voltage	kVA	Wiring diagram no.[1]	Approx. net weight (lbs.)	Frame size	Ordering code
230/460/575 Volts	115/95 Volts	0.05	2	3.1	6150	9T58K0062
		0.08	2	3.6	8100	9T58K0063
		0.10	2	5.1	8150	9T58K0064
		0.15	2	6.5	8200	9T58K0065
		0.20	2	6.5	8200	9T58K0066
		0.25	2	7.6	8250	9T58K0067
		0.30	2	10.7	10225	9T58K0068
		0.38	2	10.7	10225	9T58K0069
		0.50	2	10.7	10225	9T58K0070
		0.75	2	16.1	12300	9T58K0071
		1	2	26.7	14225	9T58K0072
		1.5	2	32.7	14300	9T58K0073
		2	2	47.4	14475	9T58K0074
208/277/380 Volts	115/95 Volts	0.05	3	3.1	6150	9T58K0082
		0.08	3	3.6	8100	9T58K0083
		0.10	3	5.1	8150	9T58K0084
		0.15	3	6.5	8200	9T58K0085
		0.20	3	6.5	8200	9T58K0086
		0.25	3	7.6	8250	9T58K0087
		0.30	3	10.7	10225	9T58K0088
		0.38	3	10.7	10225	9T58K0089
		0.50	3	10.7	10225	9T58K0090
		0.75	3	16.1	12300	9T58K0091
		1	3	26.7	14225	9T58K0092
		1.5	3	32.7	14300	9T58K0093
		2	3	47.4	14475	9T58K0094

[1] See page 10B-10 for wiring diagrams.

50/60 Hz Terminal block connection

Input voltage	Output voltage	kVA	Wiring diagram no.	Approx. net weight (lbs.)	Frame size	Ordering code
230/400/460/575 Volts	115/95/125 Volts	0.25	9	12	10225	9T58K3715
		0.35	9	12	10225	9T58K3716
		0.5	9	16	12225	9T58K3717
		0.75	9	19	12300	9T58K3718
		1	9	28	14225	9T58K3719
		1.5	9	34	14300	9T58K3720
		2	9	34	14475	9T58K3721

Factory- or field-installed options

Secondary fusing—Factory- or field-installed secondary fuse clips are available. They are restricted to units with terminal strips and a single secondary voltage or secondary with one tap.

Dual primary and secondary fusing—Factory- or field-installed dual primary and secondary fuse clips are available on all units.

Open core and coil transformers

Control power

Single-phase, fully-encapsulated design

60 Hz Terminal block

Input voltage	Output voltage	kVA	Wiring diagram no.[1]	Approx. net weight (lbs.)	Frame size	Ordering code
240x480 Volts	120/240 Volts	0.05	4	2.4	6100	9T58K2802
		0.08	4	2.8	6125	9T58K2803
		0.10	4	3.6	8100	9T58K2804
		0.15	4	5.1	8150	9T58K2805
		0.20	4	5.8	8175	9T58K2806
		0.25	4	6.5	8200	9T58K2807
		0.30	4	6.5	8200	9T58K2808
		0.38	4	7.6	8250	9T58K2809
		0.50	4	10.7	10225	9T58K2810
		0.75	4	12	12225	9T58K2811
		1	4	16.1	12300	9T58K2812
		1.5	4	26.7	14225	9T58K2813
		2	4	32.7	14300	9T58K2814
		3	4	47.4	14475	9T58K2815
600 Volts	120/240 Volts	0.08	5	2.8	6125	9T58K2823
		0.10	5	3.6	8100	9T58K2824
		0.20	5	5.8	8175	9T58K2826
		0.25	5	6.5	8200	9T58K2827
		0.30	5	6.5	8200	9T58K2828
		0.50	5	10.7	10225	9T58K2830
		0.75	5	12	12225	9T58K2831
		1	5	16.1	12300	9T58K2832
		1.5	5	26.7	14225	9T58K2833
		2	5	32.7	14300	9T58K2834
		3	5	47.4	14475	9T58K2835
120x240 Volts	120/240 Volts	0.10	6	3.6	8100	9T58K2907
		0.20	6	5.8	8175	9T58K2909
		0.30	6	6.5	8200	9T58K2911
		0.50	6	10.7	10225	9T58K2913
		0.75	6	12	12225	9T58K2914
		1	6	16.1	12300	9T58K2915
		2	6	32.7	14300	9T58K2917
		3	6	47.4	14475	9T58K2918

60 Hz Terminal block

Input voltage	Output voltage	kVA	Wiring diagram no.[1]	Approx. net weight (lbs.)	Frame size	Ordering code
120 x 240 Volts	12/24 Volts	0.05	7	2.4	6100	9T58K2873
		0.075	7	2.8	6125	9T58K2874
		0.10	7	3.6	8100	9T58K2875
		0.15	7	5.1	8150	9T58K2876
		0.20	7	5.8	8175	9T58K2877
		0.25	7	6.5	8200	9T58K2878
		0.30	7	6.5	8200	9T58K2879
240 x 480 Volts	12/24 Volts	0.25	-	6.5	8200	9T58K3024
		0.05	-	2.4	6100	9T58K3164
		0.10	-	3.6	8100	9T58K4132
208 x 240 Volts	12/24 Volts	0.05	-	2.4	6100	9T58K4050
		0.10	-	3.6	8100	9T58K4051
		0.15	-	5.1	8150	9T58K4052
		0.25	-	6.5	8200	9T58K4053

50/60 Hz Terminal block

Input voltage	Output voltage	kVA	Wiring diagram no.[1]	Approx. net weight (lbs.)	Frame size	Ordering code
240 x 480 Volts	120/240 Volts	0.50	4	10.7	10225	9T58K2930
		0.75	4	16.1	12300	9T58K2931
		1	4	26.7	14225	9T58K2932
		1.5	4	32.7	14300	9T58K2933
		2	4	47.4	14475	9T58K2934
		3	4	47.4	14475	9T58K2935
380/400/416 Volts	115/230 Volts	0.25	8	6.5	8200	9T58K2975
		0.50	8	10.7	10225	9T58K2978
		0.75	8	16.1	12300	9T58K2979
		1	8	26.7	14225	9T58K2980
		1.5	8	32.7	14300	9T58K2981
		2	8	47.4	14475	9T58K2982
		3	8	47.4	14475	9T58K2983

[1] See page 10B-10 for wiring diagrams.
[2] Secondary fusing not available.

Open core and coil transformers

Control power

Single-phase, fully-encapsulated design

60 Hz Leads Out Connection[2]

Input Voltage	Output Voltage	kVA	Wiring Diagram No.[1]	Approx. Net Weight (Lbs.)	Frame Size	Ordering code
120x240 Volts	12/24 Volts	0.05	7	2.4	6100	9T58K1873
		0.075	7	2.8	6125	9T58K1874
		0.10	7	3.6	8100	9T58K1875
		0.15	7	5.1	8150	9T58K1876
		0.20	7	5.8	8175	9T58K1877
		0.25	7	6.5	8200	9T58K1878
		0.30	7	6.5	8200	9T58K1879
		0.50	7	10.7	10225	9T58K1881
		0.75	7	12	12225	9T58K1882
		1	7	26.7	14225	9T58K1883

60 Hz Leads Out Connection[2]

Input Voltage	Output Voltage	kVA	Wiring Diagram No.[1]	Approx. Net Weight (Lbs.)	Frame Size	Ordering code
240 x 480 Volts	120/240 Volts	0.05	4	2.4	6100	9T58K1802
		0.075	4	2.8	6125	9T58K1803
		0.10	4	3.6	8100	9T58K1804
		0.15	4	5.1	8150	9T58K1805
		0.20	4	5.8	8175	9T58K1806
		0.25	4	6.5	8200	9T58K1807
		0.30	4	6.5	8200	9T58K1808
		0.375	4	7.6	8250	9T58K1809
		0.50	4	10.7	10225	9T58K1810
		0.75	4	12	12225	9T58K1811
		1	4	16.1	12300	9T58K1812
		1.5	4	26.7	14225	9T58K1813
		2	4	32.7	14300	9T58K1814
		3	4	47.4	14475	9T58K1815
600 Volts	120/240 Volts	0.10	5	3.6	8100	9T58K1824
		0.20	5	5.8	8175	9T58K1826
		0.30	5	6.5	8200	9T58K1828
		0.50	5	10.7	10225	9T58K1830
		1	5	26.7	14225	9T58K1832
		2	5	32.7	14300	9T58K1834
		3	5	47.4	14475	9T58K1835

50/60 Hz Leads Out Connection[2]

Input Voltage	Output Voltage	kVA	Wiring Diagram No.[1]	Approx. Net Weight (Lbs.)	Frame Size	Ordering code
240 x 480 Volts	120/240 Volts	0.30	4	7.6	8250	9T58K1928
		0.50	4	10.7	10225	9T58K1930
		3	4	47.4	14475	9T58K1935
380/400/416 Volts	115/230 Volts	0.50	8	10.7	10225	9T58K1978
		0.75	8	16.1	12300	9T58K1979
		1	8	26.7	14225	9T58K1980
		1.5	8	32.7	14300	9T58K1981

[1] See page 10B-10 for wiring diagrams.
[2] Secondary fusing not available.

Open core and coil transformers

Options and fusing guide

Transformer fusing options

Accessory description	Ordering code
(1) Quarter-inch fuseholder	9T58K0000G24
(1) Midget fuseholder	9T58K0000G42
(1) H/K fuseholder	9T58K0000G10
(2) CC fuseholder	9T58K0000G43
(2) H/K fuseholder	9T58K0000G05

Accessory description	Ordering code
(2) CC + (1) Quarter-inch fuseholder	9T58K0000G48
(2) CC + (1) Midget fuseholder	9T58K0000G38
(2) CC + (1) H/K fuseholder	9T58K0000G18
(2) Fuse clips	9T58K0000G09
Jumper links	9T58K0000G01

Fuse guide

Midget class CC rejection fuse

Primary voltage	Transformer continuous power rating (VA)								
	50	75	100	150	200	250	300	375	500
	Fuse rating (amperes)								
100	1.50	2.00	3.00	4.00	3.00	4.00	5.00	6.00	8.00
110	1.25	2.00	2.50	4.00	5.00	3.00	4.00	5.00	7.00
120	1.25	1.60	2.50	3.00	5.00	3.00	4.00	5.00	6.00
200	0.75	1.00	1.50	2.00	3.00	3.00	4.00	5.00	4.00
208	0.60	1.00	1.25	2.00	2.50	3.00	4.00	5.00	4.00
220	0.60	1.00	1.25	2.00	2.50	3.00	4.00	5.00	3.00
230	0.60	0.80	1.25	1.60	2.50	3.00	3.00	4.00	3.00
240	0.60	0.80	1.25	1.60	2.50	3.00	3.00	4.00	3.00
277	0.50	0.80	1.00	1.60	2.00	2.50	3.00	4.00	5.00
380	0.30	0.50	0.75	1.00	1.50	1.60	2.00	2.50	3.00
400	0.30	0.50	0.75	1.00	1.50	1.60	2.00	2.50	3.00
416	0.30	0.50	0.60	1.00	1.25	1.60	2.00	2.50	3.00
440	0.30	0.50	0.60	1.00	1.25	1.60	2.00	2.50	3.00
460	0.30	0.40	0.60	0.80	1.25	1.60	1.60	2.00	3.00
480	0.30	0.40	0.60	0.80	1.25	1.50	1.60	2.00	3.00
550	0.25	0.40	0.50	0.80	1.00	1.25	1.60	2.00	2.50
575	0.25	0.30	0.50	0.75	1.00	1.25	1.50	1.60	2.50
600	0.25	0.30	0.50	0.75	1.00	1.25	1.50	1.60	2.50

For motor control circuits fusing, refer to NEC 430-72.

Secondary fuse selection

Glass fuse

Secondary voltage	Transformer continuous power rating (VA)													
	50	75	100	150	200	250	300	375	500	750	1000	1500	2000	3000
	Fuse rating (amperes)													
12	6.00	10.00	12.00	15.00	20.00	25.00	30.00	-	-	-	-	-	-	-
24	3.00	5.00	6.00	10.00	12.00	12.00	15.00	-	25.00	-	-	-	-	-
36	2.00	3.00	4.00	6.00	8.00	10.00	12.00	-	15.00	-	-	-	-	-
48	1.50	2.50	3.00	5.00	6.00	8.00	10.00	12.00	12.00	-	-	-	-	-
95	0.80	1.25	1.60	2.50	3.00	4.00	5.00	6.00	8.00	12.00	15.00	20.00	25.00	-
110	0.75	1.00	1.50	2.00	3.00	3.00	4.00	5.00	7.00	10.00	12.00	20.00	25.00	30.00
115	0.60	1.00	1.25	2.00	2.50	3.00	4.00	5.00	7.00	10.00	12.00	20.00	20.00	30.00
120	0.60	1.00	1.25	2.00	2.50	3.00	4.00	5.00	6.00	10.00	12.00	15.00	20.00	30.00
208	0.40	0.60	0.80	1.00	1.60	2.00	2.00	3.00	4.00	6.00	8.00	12.00	15.00	20.00
220	0.30	0.50	0.75	1.00	1.50	1.60	2.00	2.50	3.00	5.00	7.00	10.00	12.00	20.00
230	0.30	0.50	0.60	1.00	1.25	1.60	2.00	2.50	3.00	5.00	7.00	10.00	12.00	20.00
240	0.30	0.50	0.60	1.00	1.25	1.60	2.00	2.50	3.00	5.00	6.00	10.00	12.00	15.00

Open core and coil transformers

CE-rated

Application

This product is designed to be incorporated into equipment manufactured for sale in the European Community. This product is in conformity with the European Standard: EN 60 742, 1995 per the provisions of the Low Voltage (LV) Directive 73/23/EEC in 1973 as amended by 93/68/EEC in 1995.

The Type "IP" CE offering utilizes all copper windings, which are encapsulated in a hardened epoxy, making the winding impervious to the elements. These designs are rated at 55° C rise with a 40° C ambient. Standard on these designs are terminal block covers. These provide added protection from current carrying terminals. These designs incorporate customer friendly connection on rugged high-impact molded terminal blocks.

Factory- or field-installed options

Available as an option are two fuse blocks that have fuse covers that provide the touch safety like the terminal blocks. These can be ordered factory-installed or as kits.

Besides being CE rated, these designs are both UL and C-UL listed.

50/60 Hz

Input voltage	Output voltage	kVA	Approx. net weight (lbs.)	Frame size	Ordering code
230/400 Volts	12/24 Volts	0.025	3	6100	9T58E0020
		0.05	4	6150	9T58E0021
		0.075	4	8100	9T58E0023
		0.1	5	8150	9T58E0024
		0.15	7	8200	9T58E0025
		0.2	12	10225	9T58E0026
		0.25	12	10225	9T58E0027
		0.3	12	10225	9T58E0028
		0.375	16	12225	9T58E0029
	24/48 Volts	0.05	4	6150	9T58E0061
		0.075	4	8100	9T58E0063
		0.1	5	8150	9T58E0064
		0.15	7	8200	9T58E0065
		0.2	12	10225	9T58E0066
		0.5	19	12300	9T58E0071
		0.75	28	14225	9T58E0073
220/380, 230/400, 240/415 Volts	110/220, 115/230, 120/240 Volts	0.025	3	6100	9T58E0150
		0.05	4	6150	9T58E0151
		0.075	4	8100	9T58E0153
		0.1	5	8150	9T58E0154
		0.15	7	8200	9T58E0155
		0.2	12	10225	9T58E0156
		0.25	12	10225	9T58E0157
		0.3	12	10225	9T58E0158
		0.375	16	12225	9T58E0159
		0.5	19	12300	9T58E0161
		0.75	28	14225	9T58E0163
		1	34	14300	9T58E0164
		1.5	45	14475	9T58E0165
200/400/480 Volts	120 Volts	0.25	12	10225	9T58E0506
400/480 Volts	120/200 Volts	1.5	45	14475	9T58E0507
380/400/415/480/528 Volts	24/48 Volts	0.3	12	10225	9T58E2000
		0.5	6	8175	9T58E2001
200/208/220/230/240 Volts	24/48 Volts	0.3	12	10225	9T58E2002

Open core and coil transformers T&X Series

Ordering table

T6050PS1

T4100PSF1

T4150PSF1

X4045SF1

50/60 Hz, RoHS and REACH compliant

Primary voltage(s)	Secondary voltage(s)	VA	Wiring diagram	Approx. net weight (lb)	Ordering code	ABB product ID
575	24	45	D	2.6	T6045SF	1TQY200060X0004
	115	45	C	2.4	T6045S1	1TQY200060X0005
		50	C	2.4	T6050PS1	1TQY200060X0007
		75	C	3.5	T6075PS1	1TQY200060X0009
		100	C	4.2	T6100PS1	1TQY200060X0013
		150	C	5.9	T6150PS1	1TQY200060X0016
		200	C	7.5	T6200PS1	1TQY200060X0019
		250	C	9.5	T6250PS1	1TQY200060X0021
		300	C	13.1	T6300PS1	1TQY200060X0024
		350	C	9.3	T6350PS1	1TQY200060X0027
		500	C	16.7	T6500PS1	1TQY200060X0031
		750	C	28.9	T6750PS1	1TQY200060X0033
	115/24	100	H	5.5	T6100PSF1	1TQY200060X0012
		500	H	14.1	T6500PSF1/C	1TQY200060X0030
460/230/208, 480/240, 440/220/200	115/24	45	A	3.5	T4045SF1	1TQY200060X0078
		50	A	3.5	T4050PSF1	1TQY200060X0077
		75	A	4.2	T4075PSF1	1TQY200060X0071
		100	A	6.7	T4100PSF1	1TQY200060X0067
		150	A	5.9	T4150PSF1	1TQY200060X0070
		250	A	9.3	T4250PSF1	1TQY200060X0068
		300	A	14.1	T4300PSF1	1TQY200060X0072
		300	A	14.1	TC4300F1	1TQY200060X0069
575/460/230	115-95	1000	G	37	T61K1	1TQY200060X0010
		2000	G	51.6	T62K1	1TQY200060X0018
		3000	G	77.1	T63K1	1TQY200060X0023
		5000	G	136.3	T65K1	1TQY200060X0029
120/240	24	100	E	5.5	TC2100F	1TQY200060X0076
		200	E	8.9	TC2200F	1TQY200060X0074
415/400/380	110/220	100	F	5.5	TC3100P21	1TQY200060X0075
		500	F	14.9	TC350021	1TQY200060X0073
460/230/208, 480/240, 440/220/200	115	750	B	28.9	X4750PS1	1TQY200060X0064
		1000	B	37	X41K1	1TQY200060X0041
		1500	B	40.7	X41.5K1	1TQY200060X0040
		2000	B	51.6	X42K1	1TQY200060X0048
		3000	B	77.1	X43K1	1TQY200060X0055
		5000	B	114.6	X45K1	1TQY200060X0060
	115/24	45	A	3.5	X4045SF1	1TQY200060X0034
		50	A	3.5	X4050PSF1	1TQY200060X0035
		75	A	4.2	X4075PSF1	1TQY200060X0038
		100	A	6.7	X4100PSF1	1TQY200060X0042
		150	A	7.9	X4150PSF1	1TQY200060X0045
		200	A	9.5	X4200PSF1	1TQY200060X0049
		250	A	11.3	X4250PSF1	1TQY200060X0052
		300	A	14.1	X4300PSF1	1TQY200060X0056
		350	A	14.1	X4350PSF1	1TQY200060X0058
		500	A	23.1	X4500PSF1	1TQY200060X0061

Open core and coil transformers T&X Series

Technical data

Technical data

Ordering code	ABB product ID	Temp rise °C	Insulation system	Primary fuse holder	Secondary fuse clip	Primary fuse & quantity	Secondary fuse & quantity	Covers	UL	CSA	CUL	CE mark (IEC)
T6045SF	1TQY200060X0004	55	105	–	Yes	–	1	–	Yes	Yes	–	–
T6045S1	1TQY200060X0005	55	130	–	Yes	2	1	–	Yes	Yes	–	–
T6050PS1	1TQY200060X0007	55	105	Yes	Yes	2	1	–	Yes	–	Yes	–
T6075PS1	1TQY200060X0009	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T6100PS1	1TQY200060X0013	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T6150PS1	1TQY200060X0016	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T6200PS1	1TQY200060X0019	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T6250PS1	1TQY200060X0021	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T6300PS1	1TQY200060X0024	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T6350PS1	1TQY200060X0027	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T6500PS1	1TQY200060X0031	80	130	Yes	Yes	2	1	–	Yes	–	Yes	–
T6750PS1	1TQY200060X0033	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T6100PSF1	1TQY200060X0012	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T6500PSF1/C	1TQY200060X0030	80	130	Yes	Yes	2	1	Yes	Yes	–	Yes	–
T4045SF1	1TQY200060X0078	55	105	–	Yes	–	1	–	Yes	Yes	–	–
T4050PSF1	1TQY200060X0077	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T4075PSF1	1TQY200060X0071	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T4100PSF1	1TQY200060X0067	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T4150PSF1	1TQY200060X0070	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T4250PSF1	1TQY200060X0068	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T4300PSF1	1TQY200060X0072	55	105	Yes	Yes	2	1	–	Yes	Yes	–	–
T61K1	1TQY200060X0010	120	180	–	–	–	–	–	Yes	Yes	–	–
T62K1	1TQY200060X0018	120	180	–	–	–	–	–	Yes	Yes	–	–
T63K1	1TQY200060X0023	120	180	–	–	–	–	–	Yes	Yes	–	–
T65K1	1TQY200060X0029	120	180	–	–	–	–	–	Yes	Yes	–	–
TC2100F	1TQY200060X0076	55	105	–	–	–	–	Yes	Yes	Yes	–	Yes
TC2200F	1TQY200060X0074	80	130	–	–	–	–	Yes	Yes	–	Yes	Yes
TC3100P21	1TQY200060X0075	55	105	Yes	–	2	–	Yes	Yes	Yes	–	Yes
TC350021	1TQY200060X0073	80	130	–	–	–	–	Yes	Yes	Yes	–	Yes
TC4300F1	1TQY200060X0069	80	130	–	–	–	–	Yes	Yes	–	Yes	Yes
X41.5K1	1TQY200060X0040	120	180	–	–	–	–	–	Yes	Yes	–	–
X41K1	1TQY200060X0041	80	130	–	Yes	–	1	–	Yes	Yes	–	–
X42K1	1TQY200060X0048	120	180	–	Yes	–	1	–	Yes	Yes	–	–
X43K1	1TQY200060X0055	120	180	–	–	–	–	–	Yes	Yes	–	–
X45K1	1TQY200060X0060	120	180	–	–	–	–	–	Yes	Yes	–	–
X4750PS1	1TQY200060X0064	80	130	Yes	Yes	2	1	–	Yes	–	Yes	–
X4045SF1	1TQY200060X0034	55	105	–	Yes	–	1	–	Yes	–	Yes	–
X4050PSF1	1TQY200060X0035	80	130	Yes	Yes	2	1	–	Yes	–	Yes	–
X4075PSF1	1TQY200060X0038	55	105	Yes	Yes	2	1	–	Yes	–	Yes	–
X4100PSF1	1TQY200060X0042	55	105	Yes	Yes	2	1	–	Yes	–	Yes	–
X4150PSF1	1TQY200060X0045	80	130	Yes	Yes	2	1	–	Yes	–	Yes	–
X4200PSF1	1TQY200060X0049	80	130	Yes	Yes	2	1	–	Yes	–	Yes	–
X4250PSF1	1TQY200060X0052	80	130	Yes	Yes	2	1	–	Yes	–	Yes	–
X4300PSF1	1TQY200060X0056	80	130	Yes	Yes	2	1	–	Yes	–	Yes	–
X4350PSF1	1TQY200060X0058	80	130	Yes	Yes	2	1	–	Yes	–	Yes	–
X4500PSF1	1TQY200060X0061	80	130	Yes	Yes	2	1	–	Yes	–	Yes	–

Open core and coil transformers T&X Series

Accessories

TPTC-2002

Description	UL	Approx. product net weight (lbs.)	Ordering code	ABB product ID
Primary Fuse Kit, Class CC, 2pole	Yes	0.2	FKTP-1001	1TQY000000P0010
IP20,4-position,clear,terminal covers	Yes	0.5	TPTC-1001	1TQY000000P0011
IP20,6-position,clear,terminal covers	Yes	0.5	TPTC-2002	1TQY000000P0012
IP20 Primary Class CC Fuse Cover,2pole	Yes	0.5	TPTC-2006	1TQY000000P0013

Open core and coil transformers

Wiring diagrams



Diagram A



Diagram B



Diagram C



Diagram D



Diagram E



Diagram F



Diagram G



Diagram H

Open core and coil transformers T&X Series

Weights and dimensions

ABB prod. ID	Ordering code	A depth (in)	B width (in)	C height (in)	Approx. product net weight (lb.)	Approx. package net length (in)	Approx. package net width (in)	Approx. package net height (in)	Approx. package net weight (lb)
1TQY200060X0078	T4045SF1	3.9	3	3.3	3.5	7.3	5.8	4.8	4.3
1TQY200060X0077	T4050PSF1	3.9	3	4.1	3.5	7.3	5.8	4.8	4.3
1TQY200060X0071	T4075PSF1	3.5	3.4	4.4	4.2	7.3	5.8	4.8	5
1TQY200060X0067	T4100PSF1	3.9	3.8	4.7	6.7	7.3	5.8	4.8	7.5
1TQY200060X0070	T4150PSF1	4.3	3.8	4.7	5.9	7.3	5.8	4.8	6.7
1TQY200060X0068	T4250PSF1	5.1	4.5	5.3	9.3	6.8	6.5	10.3	10.1
1TQY200060X0072	T4300PSF1	6.2	5.3	6	14.1	10.3	6.5	6.8	14.9
1TQY200060X0005	T6045S1	3.4	3	3.3	2.6	7.3	5.8	4.8	3.4
1TQY200060X0004	T6045SF	3.4	3	3.3	2.6	7.3	5.8	4.8	3.4
1TQY200060X0007	T6050PS1	3.4	3	4.1	2.4	7.3	5.8	4.8	3.4
1TQY200060X0009	T6075PS1	3.9	3	4.1	3.5	7.3	5.8	4.8	4.3
1TQY200060X0013	T6100PS1	3.5	3.4	4.4	4.2	7.3	5.8	4.8	5
1TQY200060X0012	T6100PSF1	3.6	3.8	4.7	5.5	7.3	5.8	4.8	6.3
1TQY200060X0016	T6150PS1	4.3	3.8	4.7	5.9	7.3	5.8	4.8	6.7
1TQY200060X0010	T61K1	7	6.4	5.5	37	10.8	10.5	10.5	37.8
1TQY200060X0019	T6200PS1	3.9	4.5	5.3	7.5	6.8	6.5	10.3	8.3
1TQY200060X0021	T6250PS1	4.2	4.5	5.3	9.5	6.8	6.5	10.3	10.3
1TQY200060X0018	T62K1	7.6	9	7.7	51.6	10.8	10.5	10.5	52.4
1TQY200060X0024	T6300PS1	5	4.5	5.3	13.1	10.3	6.5	6.8	13.9
1TQY200060X0027	T6350PS1	5.1	4.5	5.3	9.3	10.3	6.5	6.8	10.1
1TQY200060X0023	T63K1	8.7	9	7.7	77.1	15	14.5	14.5	77.9
1TQY200060X0031	T6500PS1	6.2	5.3	6	16.7	10.3	6.5	6.8	17.5
1TQY200060X0030	T6500PSF1/C	6.2	5.3	6	14.1	10.3	6.5	6.8	14.9
1TQY200060X0029	T65K1	11.3	9	10	136.3	15	14.5	14.5	137.1
1TQY200060X0033	T6750PS1	7	5.3	6	28.9	10.3	6.5	6.8	29.7
1TQY200060X0076	TC2100F	3.6	3.8	3.5	5.5	7.3	5.8	4.8	6.3
1TQY200060X0074	TC2200F	3.9	4.5	4	8.9	6.8	6.5	10.3	9.7
1TQY200060X0075	TC3100P21	3.6	3.8	5.2	5.5	7.3	5.8	4.8	6.3
1TQY200060X0073	TC350021	5.7	5.3	4.8	14.9	10.3	6.5	6.8	15.7
1TQY200060X0069	TC4300F1	6.2	5.3	5	14.1	10.3	6.5	6.8	14.9
1TQY200060X0034	X4045SF1	3.9	3	3.3	3.5	7.3	5.8	4.8	4.3
1TQY200060X0035	X4050PSF1	3.9	3	4.1	3.5	7.3	5.8	4.8	4.3
1TQY200060X0038	X4075PSF1	3.5	3.4	4.4	4.2	7.3	5.8	4.8	5
1TQY200060X0040	X41.5K1	7.4	6.8	5.8	40.7	15	14.5	14.5	41.5
1TQY200060X0042	X4100PSF1	3.9	3.8	4.7	6.7	7.3	5.8	4.8	7.5
1TQY200060X0045	X4150PSF1	4.3	3.8	4.7	7.9	7.3	5.8	4.8	8.2
1TQY200060X0041	X41K1	7.5	6.4	5.5	37	10.8	10.5	10.5	37.8
1TQY200060X0049	X4200PSF1	4.2	4.5	5.3	9.5	6.8	6.5	10.3	10.3
1TQY200060X0052	X4250PSF1	4.6	4.5	5.3	11.3	6.8	6.5	10.3	12.1
1TQY200060X0048	X42K1	8.2	6.8	6.3	51.6	10.8	10.5	10.5	52.4
1TQY200060X0056	X4300PSF1	6.2	5.3	6	14.1	10.3	6.5	6.8	14.9
1TQY200060X0058	X4350PSF1	6.2	5.3	6	14.1	10.3	6.5	6.8	14.9
1TQY200060X0055	X43K1	8.5	9	7.5	77.1	15	14.5	14.5	77.9
1TQY200060X0061	X4500PSF1	7.2	5.3	6	23.1	10.3	6.5	6.8	23.9
1TQY200060X0060	X45K1	10.4	9	10	114.6	15	14.5	14.5	115.4
1TQY200060X0064	X4750PS1	7	5.3	6	28.9	10.3	6.5	6.8	29.7





Front



Side



General purpose encapsulated

Single-phase NEMA 3R

Type QB up to 3 kVA

QB small power transformers come standard in NEMA 3R non-ventilated weatherproof enclosures. These units feature encapsulated copper core and coils with integrated junction boxes for easy wiring. Improved termination spacing and wiring compartment room gives greater flexibility in selecting various UL listed connectors for either copper or aluminum cable.

Type QB, .050 kVA-3 kVA, Single-phase

.050 - 3 kVA indoor/outdoor Type QB UL Listed C-UL Listed

Input voltage	Output voltage	kVA	Frequency (Hz)	Taps	Wiring diagram no.[1]	Weight (lbs)	Frame size	Ordering code
240 x 480 Volts, 480 Volts	120/240 Volts	0.05	60	No Taps	1	6	6100	9T51B0002
240 x 480 Volts		0.05	50/60	No Taps	1	6	6100	9T51B0502
240 x 480 Volts, 480 Volts		0.075	60	No Taps	1	6	6200	9T51B0003
240 x 480 Volts		0.075	50/60	No Taps	1	6	6200	9T51B0503
240 x 480 Volts, 480 Volts		0.1	60	No Taps	1	6	6200	9T51B0004
240 x 480 Volts		0.1	50/60	No Taps	1	6	6200	9T51B0504
240 x 480 Volts, 480 Volts		0.15	60	No Taps	1	10	8175	9T51B0005
240 x 480 Volts		0.15	50/60	No Taps	1	10	8175	9T51B0505
240 x 480 Volts, 480 Volts		0.25	60	No Taps	1	10	8175	9T51B0007
240 x 480 Volts		0.25	50/60	No Taps	1	10	8200	9T51B0507
240 x 480 Volts, 480 Volts		0.5	60	No Taps	1	16	10200	9T51B0008
240 x 480 Volts		0.5	50/60	No Taps	1	20	10225	9T51B0508
240 x 480 Volts, 480 Volts		0.75	60	No Taps	1	25	12200	9T51B0009
240 x 480 Volts		0.75	50/60	No Taps	1	25	12225	9T51B0509
240 x 480 Volts, 480 Volts		1	60	No Taps	1	25	12225	9T51B0010
240 x 480 Volts		1	50/60	No Taps	1	30	12275	9T51B0510
240 x 480 Volts, 480 Volts		1.5	60	No Taps	1	40	14200	9T51B0011
240 x 480 Volts		1.5	50/60	No Taps	1	40	14225	9T51B0511
240 x 480 Volts, 480 Volts		2	60	No Taps	1	45	14250	9T51B0012
240 x 480 Volts		2	50/60	No Taps	1	50	14300	9T51B0512
240 x 480 Volts, 480 Volts		3	60	No Taps	1	55	14350	9T51B0013
240 x 480 Volts		3	50/60	No Taps	1	60	14400	9T51B0513
480 Volts	120/240 Volts	0.5	50/60	(-2: 5.0%)	2	20	10225	9T51B0548
		0.75	50/60	(-2: 5.0%)	2	25	12200	9T51B0549
		1	60	(-2: 5.0%)	2	25	12225	9T51B0050
		1	50/60	(-2: 5.0%)	2	30	12275	9T51B0550
		1.5	60	(-2: 5.0%)	2	40	14200	9T51B0051
		1.5	50/60	(-2: 5.0%)	2	40	14225	9T51B0551
		2	60	(-2: 5.0%)	2	45	14250	9T51B0052
		2	50/60	(-2: 5.0%)	2	50	14300	9T51B0552
		3	60	(-2: 5.0%)	2	55	14350	9T51B0053
		3	60	(+2, -2: 2.5%)	3	55	14350	9T51B0135
		3	50/60	(-2: 5.0%)	2	60	14400	9T51B0553
600 Volts	120/240 Volts	0.05	60	No Taps	5	6	6100	9T51B0082
		0.075	60	No Taps	5	6	6200	9T51B0083
		0.1	60	No Taps	5	6	6200	9T51B0084
		0.1	50/60	No Taps	5	6	6200	9T51B0584
		0.15	60	No Taps	5	10	8175	9T51B0085
		0.25	60	No Taps	5	10	8175	9T51B0087
		0.25	50/60	No Taps	5	10	8200	9T51B0587
		0.5	60	No Taps	5	16	10200	9T51B0088
		0.5	50/60	(-2: 5.0%)	2	20	10225	9T51B0568
		0.75	60	No Taps	5	25	12200	9T51B0089
		0.75	50/60	(-2: 5.0%)	2	25	12200	9T51B0569
		1	60	(-2: 5.0%)	2	25	12225	9T51B0070
		1	60	No Taps	5	25	12225	9T51B0090
		1	50/60	(-2: 5.0%)	2	30	12275	9T51B0570
		1.5	60	(-2: 5.0%)	2	40	14200	9T51B0071
		1.5	60	No Taps	5	40	14200	9T51B0091
		1.5	50/60	(-2: 5.0%)	2	40	14225	9T51B0571
		2	60	(-2: 5.0%)	2	45	14250	9T51B0072
		2	60	No Taps	5	45	14250	9T51B0092
		2	50/60	(-2: 5.0%)	2	50	14300	9T51B0572
		2	50/60	No Taps	-	50	14300	9T51B0592
		3	60	(-2: 5.0%)	2	55	14350	9T51B0073
		3	60	No Taps	5	55	14350	9T51B0093
		3	50/60	(-2: 5.0%)	2	60	14400	9T51B0573
		3	50/60	No Taps	-	60	14400	9T51B0593

[1] See page 10B-23 for wiring diagrams.

General purpose encapsulated

Single-phase NEMA 3R

Type QB up to 3 kVA

.050 - 3 kVA indoor/outdoor Type QB UL Listed C-UL Listed

Input voltage	Output voltage	kVA	Frequency (Hz)	Taps	Wiring diagram no.[1]	Weight (lbs)	Frame size	Ordering code
120 x 240 Volts	120/240 Volts	0.05	60	No Taps	1	6	6100	9T51B0022
		0.1	60	No Taps	1	6	6200	9T51B0024
		0.25	60	No Taps	1	10	8175	9T51B0027
		0.5	60	No Taps	1	16	10200	9T51B0028
		0.75	60	No Taps	1	25	12200	9T51B0029
		1	60	No Taps	1	25	12225	9T51B0030
		1.5	60	No Taps	1	40	14200	9T51B0031
		2	60	No Taps	1	45	14250	9T51B0032
		3	60	No Taps	1	60	14400	9T51B0033
208 Volts	120/240 Volts	0.5	60	No Taps	4	16	10200	9T51B0158
		0.75	60	No Taps	4	25	12200	9T51B0159
		1	60	No Taps	4	25	12225	9T51B0160
		2	60	No Taps	4	45	14250	9T51B0156
		3	60	No Taps	4	55	14350	9T51B0157

.050 - 3 kVA indoor/outdoor Type QB UL Listed C-UL Listed

Input voltage	Output voltage	kVA	Frequency (Hz)	Taps	Wiring diagram no.[1]	Weight (lbs)	Frame size	Ordering code
277 Volts	120/240 Volts	0.25	60	(-2: 5.1%)	2	10	8175	9T51B0187
		0.5	60	(-2: 5.1%)	2	16	10200	9T51B0188
		0.75	60	(-2: 5.1%)	2	25	12200	9T51B0189
		1	60	(-2: 5.1%)	2	30	12275	9T51B0190
		1.5	60	(-2: 5.1%)	2	40	14200	9T51B0191
		2	60	(-2: 5.1%)	2	45	14250	9T51B0192
		3	60	(-2: 5.1%)	2	55	14350	9T51B0193
380/400/416 Volts	120/240 Volts	0.15	50/60	No Taps	2	10	8175	9T51B0165
		0.25	50/60	No Taps	2	10	8200	9T51B0167
		0.5	50/60	No Taps	2	20	10225	9T51B0168
		0.75	50/60	No Taps	2	25	12200	9T51B0169
		1	50/60	No Taps	2	30	12275	9T51B0170
		1.5	50/60	No Taps	2	40	14225	9T51B0171
		2	50/60	No Taps	2	50	14300	9T51B0172
		3	50/60	No Taps	2	60	14400	9T51B0173

[1] See page 10B-23 for wiring diagrams.

Buck-Boost

Autotransformers
Encapsulated

Application

For general lighting and power service

Autotransformers are more economical than isolation transformers designed to carry the same load. Within their voltage limitations, they will perform the same function as transformers with the exception of isolating two circuits. You can use these autotransformers to obtain 120 Volts from a 240 Volt circuit, to derive a neutral on a 240 Volt, two-wire circuit, or to balance a 120/240 Volt, three-wire circuit. They also may be used in banks to create polyphase circuits. See footnotes below.



Wiring diagram: single-phase



Wiring diagram: three-phase

For bucking or boosting voltage of single-phase indoor/outdoor Type QB 60 Hz UL Listed CSA Certified[1]

Input voltage	Output voltage	kVA[2]	Height (in)	Width (in)	Depth (in)	Approx. net weight (Lbs.)	Frame size	Ordering code
240/120 Volts	120 or 240/120 Volts (Three-Wire)	0.5	7.38	6.13	4.25	10	8175	9T51B0136
		0.75	8.38	6.88	4.88	16	10200	9T51B0137
		1	8.38	6.88	4.88	16	10200	9T51B0138
		1.5	9.63	7.88	5.5	25	12200	9T51B0139
		2	9.63	7.88	5.5	25	12225	9T51B0140
		3	11.13	9.38	6.75	40	14200	9T51B0141
		5	11.13	9.38	6.75	60	14400	9T51B0142

[1] Through 3 kVA

For bucking or boosting voltage of single-phase indoor/outdoor Type QMS 60 Hz UL Listed CSA Certified

Input voltage	Output voltage	kVA[2]	Height (in)	Width (in)	Depth (in)	Approx. net weight (Lbs.)	Frame size	Ordering code
240/120 Volts	120 or 240/120 Volts (Three-Wire)	10	14.50	10.62	11.00	103	16350	9T21B4553G02
		15	17.06	10.62	11.00	147	16600	9T21B9201
		25	17.06	12.50	12.50	220	19500	9T21B9202

[2] kVA output at 120 Volts, two-wire, or allowable unbalance at 240/120 Volts, three-wire.

For boosting voltage of three-phase indoor/outdoor Type QB 60 Hz UL Listed

Input voltage	Output voltage	kVA[2]	Height (in)	Width (in)	Depth (in)	Approx. net weight (Lbs.)	Frame size	Ordering code
208Y/120 Volts	230/133 Volts	6	7.38	6.13	4.25	10	8175	9T51B0143
		9	8.38	6.88	4.88	16	10200	9T51B0144
		15	8.38	6.88	4.88	20	10225	9T51B0145
		30	9.63	7.88	5.50	30	12275	9T51B0146
		45	11.13	9.38	6.75	40	14200	9T51B0147
		75	11.13	9.38	6.75	60	14400	9T51B0148
		6	7.38	6.13	4.25	10	8175	9T51B0150
		15	9.63	7.88	5.50	25	12200	9T51B0152
		30	11.13	9.38	6.75	40	14200	9T51B0153

[3] Bank of three single-phase autotransformers to be connected wye. Dimensions and weights are for each unit in bank. Each single autotransformer is rated 1/3 of the bank kVA rating. Order three single-phase transformers for each three-phase bank.

Buck-Boost

Buck-Boost
Isolating transformers
Encapsulated

Product description
Buck boost transformers are small, single-phase, dry type distribution transformers designed and shipped as isolating transformers. They have a dual voltage primary and a dual voltage secondary. These transformers can be connected for a wide range of voltage combinations. The most common use is to buck (lower) or boost (raise) the supply voltage a small amount. Buck boost transformers comply with NEC Article 210-9, Exception 1, when field connected as an autotransformer.

ABB bucking and boosting transformers provide an economical and convenient means for bucking or boosting voltage, usually no more than ±20% on single- and three-phase circuits. They are compact, relatively light in weight, and can be easily installed for indoor or outdoor service.

Buck-boost transformers are employed primarily for boosting single-and three-phase circuits by connecting them as autotransformers. When connected as an autotransformer, only the low-voltage, high-current capacity secondary windings are required to carry the load. Because this load is only transformed over a small change in voltage, the buck-boost transformer can handle loads many times its nameplate kVA rating.

Beyond the typical bucking and boosting applications, the transformers with series-multiple 12/24, 24/48, or 16/32 Volt secondary windings are suitable for a wide variety of applications. Two or more units can be used in various combinations to obtain many other special voltages.

Advantages
- Efficient insulating materials permit compact size and light weight
- Dual voltage primary and dual voltage secondary for-maximum versatility
- Large, front-accessible wiring compartment permits fast, easy wiring
- Convenient conduit knockouts located on side, bottom and back of wiring compartment
- Many ABB buck-boost transformers fit competitor mounting footprints
- Indoor or outdoor service

Indoor/outdoor Type QB transformer; single-phase



Wiring diagram for low voltage loads

Key features
- Convenient and least expensive method of matching line voltage with equipment voltage
- More efficient than equivalent isolation transformers
- Ability to handle loads up to 20 times nameplate rating when connected as an autotransformer
- Ideal for changing line voltages by small amounts
- Primary voltages include 120V, 240V and 480V
- Secondary voltages include 12V, 16V, 24V, 32V, 48V
- UL and cUL Listed
- Qualified to the seismic requirements of IEEE-693-1997 and IBC-2018

Applications
- International voltage adaptation
- Commercial and industrial air conditioning
- Heating systems
- Induction motors
- Voltage line drop correction
- Landscape lighting
- Low-voltage lighting

Efficient operation of electrical equipment requires that line voltage be at or near the nameplate rating of the equipment. In order to match available line voltage (whether it be too high or low) with equipment voltage, buck-boost transformers provide the most convenient and least expensive method.

Do not use buck-boost transformers to solve a fluctuating voltage problem. They should be used to compensate for high- or low voltage conditions only when the available line voltage is reasonably constant.

Buck-Boost

Encapsulated

For bucking and boosting voltage

Single-phase indoor/outdoor Type QB 60 Hz UL Listed C-UL Listed

Input voltage	Output voltage	kVA	Height (in)	Width (in)	Depth (in)	Approx. net weight (Lbs.)	Frame size	Ordering code
120/240 Volts	12/24 Volts	0.05	6.38	5.12	3.25	6	6100	9T51B0102
		0.075	6.38	5.12	3.25	6	6200	9T51B0103
		0.1	6.38	5.12	3.25	6	6200	9T51B0104
		0.15	7.38	6.12	4.25	10	8175	9T51B0105
		0.25	7.38	6.12	4.25	10	8175	9T51B0107
		0.5	8.38	6.88	4.88	20	10225	9T51B0108
		0.75	9.62	7.88	5.50	25	12200	9T51B0109
		1	9.62	7.88	5.50	25	12225	9T51B0110
		1.5	11.12	9.38	6.72	40	14200	9T51B0111
		2	11.12	9.38	6.72	50	14300	9T51B0112
		3	-	9.38	6.72	55	14350	9T51B0113
120/240 Volts	16/32 Volts	0.05	6.38	5.12	3.25	6	6100	9T51B0122
		0.075	6.38	5.12	3.25	6	6200	9T51B0123
		0.1	6.38	5.12	3.25	6	6200	9T51B0124
		0.15	7.38	6.12	4.25	10	8175	9T51B0125
		0.25	7.38	6.12	4.25	10	8175	9T51B0127
		0.5	8.38	6.88	4.88	20	10225	9T51B0128
		0.75	9.62	7.88	5.50	25	12200	9T51B0129
		1	9.62	7.88	5.50	30	12300	9T51B0130
		1.5	11.12	9.38	6.72	40	14200	9T51B0131
		2	11.12	9.38	6.72	50	14300	9T51B0132
		3	-	9.38	6.72	55	14350	9T51B0133
240/480 Volts	24/48 Volts	0.05	6.38	5.12	3.25	6	6100	9T51B0202
		0.075	6.38	5.12	3.25	6	6200	9T51B0203
		0.1	6.38	5.12	3.25	6	6200	9T51B0204
		0.15	7.38	6.12	4.25	10	8175	9T51B0205
		0.25	7.38	6.12	4.25	10	8175	9T51B0207
		0.5	8.38	6.88	4.88	20	10225	9T51B0208
		0.75	9.62	7.88	5.50	25	12200	9T51B0209
		1	9.62	7.88	5.50	30	12275	9T51B0210
		1.5	11.12	9.38	6.72	40	14200	9T51B0211
		2	11.12	9.38	6.72	50	14300	9T51B0212
		3	11.12	9.38	6.72	55	14350	9T51B0213

Single-phase indoor/outdoor Type QMS 60 Hz UL Listed C-UL Listed

Input voltage	Output voltage	kVA	Height (in)	Width (in)	Depth (in)	Approx. net weight (Lbs.)	Frame size	Ordering code
120/240 Volts	12/24 Volts	5	14.5	10.62	11	103	16350	9T21B1037G02
	16/32 Volts	5	14.5	10.62	11	115	16400	9T21B1040G02

Single-phase indoor/outdoor Type QMS 50 Hz UL Listed C-UL Listed

Input voltage	Output voltage	kVA	Height (in)	Width (in)	Depth (in)	Approx. net weight (Lbs.)	Frame size	Ordering code
120/240 Volts	16/32 Volts	5	14.5	10.62	11	127	16450	9T21B1064G02

NOTE: In addition to bucking or boosting low circuit voltages to related value, these transformers can be used as two winding transformers to supply the rated nameplate low voltages, 12 to 48 Volts, two-wire or 12/24 to 24/48 Volts, three-wire. Also available in 50/60 Hz ratings.

Dimensions and wiring diagrams

QB transformers

Frame size	Outline drawing no.	Height (in.)	Width (in.)	Depth (in.)
6100	303B920AAP001	6.38	5.12	3.25
6150	303B920AAP001	6.38	5.12	3.25
6200	303B920AAP001	6.38	5.12	3.25
8175	303B920AAP002	7.38	6.12	4.25
8200	303B920AAP002	7.38	6.12	4.25
10200	303B920AAP003	8.38	6.88	4.88
10225	303B920AAP003	8.38	6.88	4.88
12200	303B920AAP004	9.62	7.88	5.5
12225	303B920AAP004	9.62	7.88	5.5
12275	303B920AAP004	9.62	7.88	5.5
12300	303B920AAP004	9.62	7.88	5.5
14200	303B920AAP005	11.12	9.38	6.72
14225	303B920AAP005	11.12	9.38	6.72
14250	303B920AAP005	11.12	9.38	6.72
14300	303B920AAP005	11.12	9.38	6.72
14350	303B920AAP005	11.12	9.38	6.72
14400	303B920AAP005	11.12	9.38	6.72



Diagram 1



Diagram 2



Diagram 5

General purpose encapsulated

Single-phase NEMA 3R

Type QMS have an encapsulated core & coil fully encapsulated isolation transformer in a painted NEMA 3R non-ventilated enclosure with IP 20 wiring compartment

Type QMS, 5 kVA-25 kVA, Single-phase

5 - 25 kVA indoor/outdoor Type QMS 115°C Rise UL Listed C-UL Listed

Input voltage	Output voltage	kVA	Frequency (Hz)	Taps	Wiring diagram no.[1]	Weight (lbs)	Frame size	Ordering code
120 x 240 Volts	120/240 Volts	5	60	No Taps	1	103	16350	9T21B1001G02
		7.5	60	No Taps	1	147	16600	9T21B1002G02
		10	60	No Taps	1	198	19400	9T21B1003G02
		10	60	No Taps	1	198	19400	9T21B1054G02
		25	60	No Taps	1	233	19550	9T21B9102
208 Volts	120/240 Volts	5	60	No Taps	4	103	16350	9T21B1028G02
		7.5	60	No Taps	4	147	16600	9T21B1029G02
		10	60	No Taps	4	198	19400	9T21B1030G02
		15	60	No Taps	4	220	19500	9T21B9119
		25	60	No Taps	4	388	50500	9T21B9120

[1] See page 10B-25 for wiring diagrams.
[2] For Outdoor NEMA 3R Enclosure add suffix G62 to Catalog Number.

5 - 25 kVA indoor/outdoor Type QMS 115°C Rise UL Listed C-UL Listed

Input voltage	Output voltage	kVA	Frequency (Hz)	Taps	Wiring diagram no.[1]	Weight (lbs)	Frame size	Ordering code
277 Volts	120/240 Volts	5	60	(-2: 5.1%)	2	103	16350	9T21B1046G02
		7.5	60	(-2: 5.1%)	2	147	16600	9T21B1047G02
		10	60	(-2: 5.1%)	2	198	19400	9T21B1048G02
		10	60	(-2 2.5%)	2	198	19400	9T21B1266G02
		15	60	(-2: 5.1%)	2	220	19500	9T21B9143

[1] See page 10B-25 for wiring diagrams.

5 - 25 kVA indoor/outdoor Type QMS 115°C Rise UL Listed C-UL Listed

Input voltage	Output voltage	kVA	Frequency (Hz)	Taps	Wiring diagram no.[1]	Weight (lbs)	Frame size	Ordering code
240 x 480 Volts	120/240 Volts	5	60	No Taps	1	103	16350	9T21B1004G02
		5	50/60	No Taps	1	115	16400	9T21B1055G02
		7.5	60	No Taps	1	147	16600	9T21B1005G02
		7.5	50/60	No Taps	1	174	16600	9T21B1056G02
		10	60	No Taps	1	198	19400	9T21B1006G02
		10	50/60	No Taps	1	198	19400	9T21B1057G02
		15	60	No Taps	1	220	19500	9T21B9103
		15	50/60	No Taps	1	233	19550	9T21B9133
		25	60	No Taps	1	388	50500	9T21B9104
		25	50/60	No Taps	1	428	50600	9T21B9134
480 Volts	120/240 Volts	5	60	(-2: 5.0%)	2	103	16350	9T21B1007G02
		5	60	(+2, -2: 2.5%)	3	103	16350	9T21B1013G02
		7.5	60	(-2: 5.0%)	2	147	16600	9T21B1008G02
		7.5	60	(+2, -2: 2.5%)	3	147	16600	9T21B1014G02
		10	60	(-2: 4.9%)	2	198	19400	9T21B1009G02
		10	60	(+2, -2: 2.6%)	3	198	19400	9T21B1015G02
		15	60	(-2: 5.0%)	2	220	19500	9T21B9105
		15	60	(+2, -2: 2.5%)	3	220	19500	9T21B9109
		25	60	(-2: 5.0%)	2	388	50500	9T21B9106
		25	60	(+2, -2: 2.5%)	3	388	50500	9T21B9110
600 Volts	120/240 Volts	5	60	No Taps	5	103	16350	9T21B1016G02
		5	60	(-2: 5.0%)	2	103	16350	9T21B1019G02
		7.5	60	(-2: 5.0%)	2	147	16600	9T21B1020G02
		10	60	(-2: 4.9%)	2	198	19400	9T21B1021G02
		15	60	No Taps	5	220	19500	9T21B9111
		15	60	(-2: 4.8%)	2	220	19500	9T21B9113
		25	60	(-2: 5.0%)	2	388	50500	9T21B9114

[1] See page 10B-25 for wiring diagrams.

Dimensions and wiring diagrams

QMS transformers

Frame size	Outline drawing no.	Height (in.)	Width (in.)	Depth (in.)
16350	303B923AAP005	14.5	10.62	11
16400	303B923AAP005	14.5	10.62	11
16450	303B923AAP005	14.5	10.62	11
16600	303B923AAP007	17.06	10.62	11
19400	303B923AAP010	17.06	12.5	12.5
19450	303B923AAP010	17.06	12.5	12.5
19500	303B915AAP015	35	12.62	12.62
1619	303B922AAP001	14.50	10.75	11.12
1620	303B922AAP001	14.50	10.75	11.12
1921	303B922AAP003	17.12	12.62	12.75
1923	303B922AAP004	18.81	14.75	14.53
50500	303B915AAP025	44.75	16.75	16



Diagram 1



Diagram 2



Diagram 3



Diagram 4



Diagram 5

QUICK PRODUCT REFERENCES

Electrical installation solutions for buildings
Quick product references

Index

MCBs wiring diagrams	2
RCDs wiring diagrams	3
Auxiliary elements	11
Protection and safety wiring diagrams	16
Command and signaling wiring diagrams	30
Control and automation wiring diagrams	35
Energy efficiency wiring diagrams	40
Overall dimensions	62
MCBs and RCDs worldwide marks and approvals	180
MDRCs worldwide marks and approvals	188

Quick product references

MCBs wiring diagrams

MCBs

S 201 / S 301	S 202 / S 302	S 203 / S 303	S 204 / S 304	S 201 Na / S 301 Na	S 203 Na / S 303 Na
					

S 751 DR	S 752 DR	S 753 DR	S 754 DR
			

S 801	S 802	S 803	S 804
			

S 802 PV-M	S 803 PV-M	S 804 PV-M
		

SN201	S2011C	S202C	S203C	S204C
				

Quick product references

RCDs wiring diagrams

RCDs

F 202



F 204



F 204 left neutral



F 202 B



F 204 B



F-ARI 2 Test



F-ARI 4 Test



F-ATI 2 Test



F-ATI 4 Test



Quick product references

RCDs wiring diagrams

RCD-blocks

DDA 202

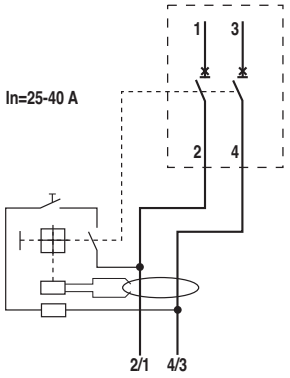

DDA 203

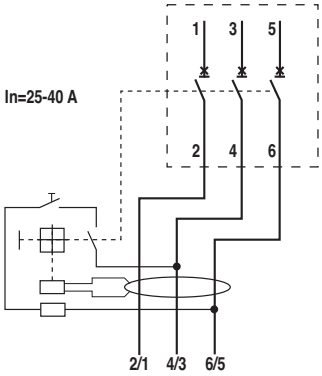

DDA 204

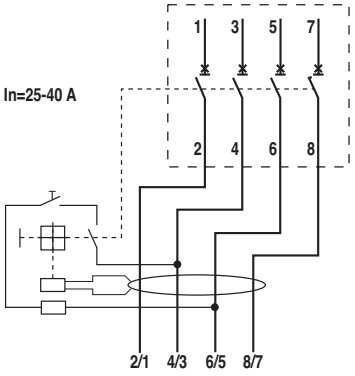

DDA 202

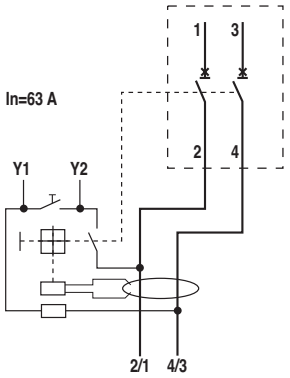

DDA 203

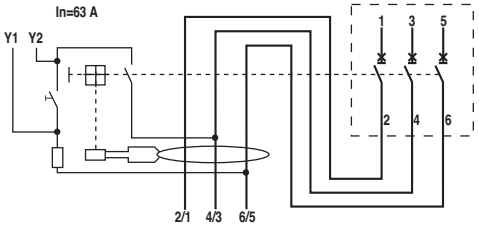

DDA 204

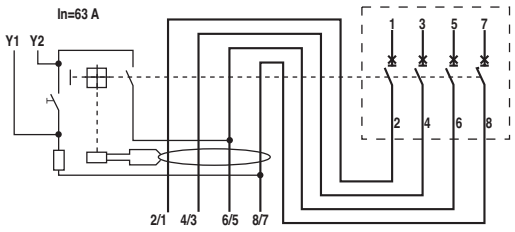

Quick product references

RCDs wiring diagrams

RCD-blocks

DDA 202 AE	DDA 203 AE	DDA 204 AE
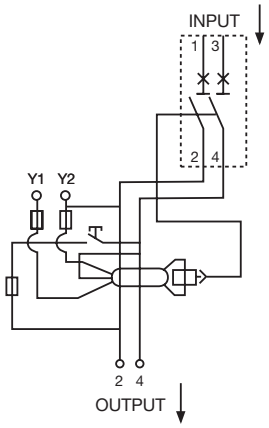	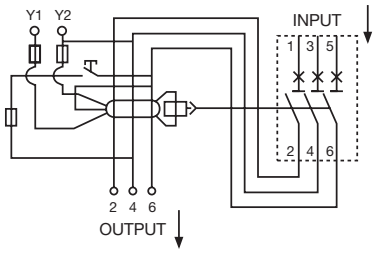	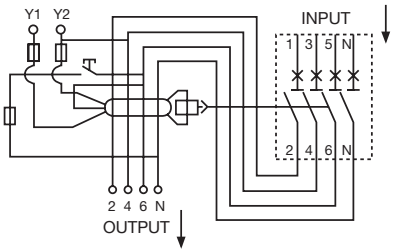

DDA 202 B type	DDA 203 B type	DDA 204 B type
In=25 A	In=25 A	In=25 A
	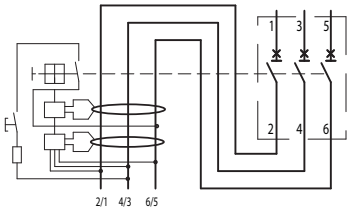	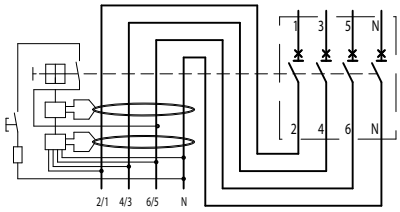
In=40-63 A	In=40-63 A	In=40-63 A
	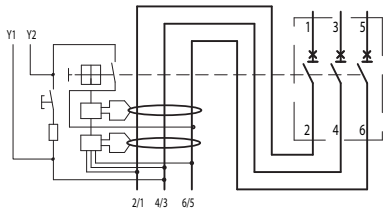	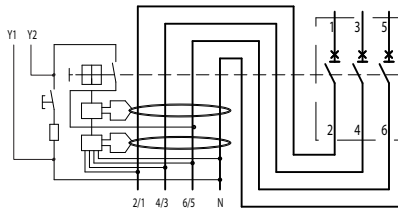

DDA 802	DDA 803	DDA 804
	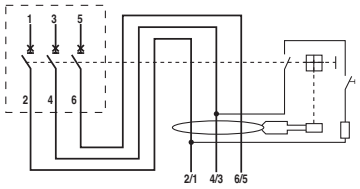	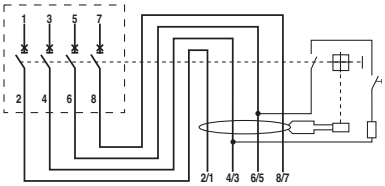

Quick product references

RCDs wiring diagrams

RCBOs

DS201 - DS301C



DS202CR



DS202



DS203



DS204



DS202

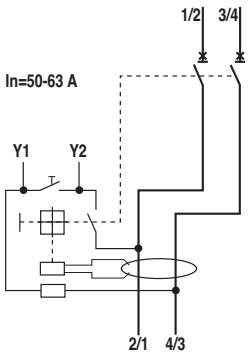

DS203

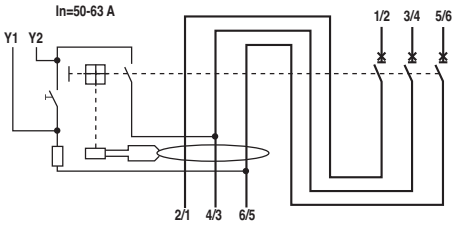

DS204

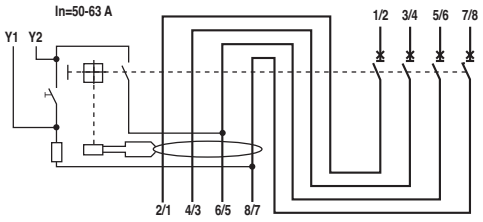

DSE201 - DSE201 M



Quick product references

RCDs wiring diagrams

RCBOs

DS203NC



DSE203N M



DSN201E



DSE201NS



AFDD

S-ARC1



DS-ARC1



Residual current relays

RD2 residual current relays

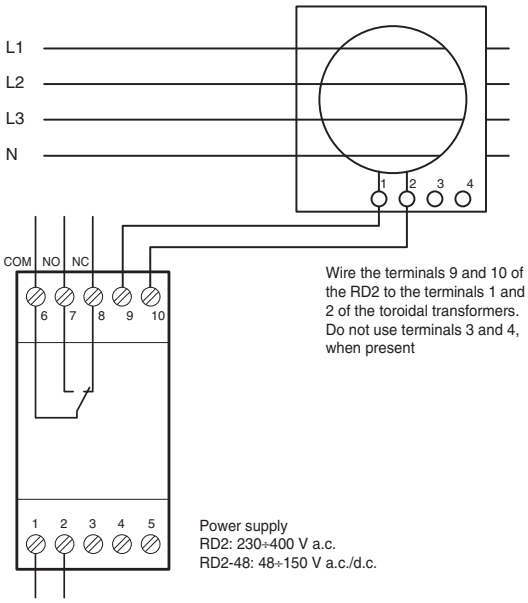

Wire the terminals 9 and 10 of the RD2 to the terminals 1 and 2 of the toroidal transformers. Do not use terminals 3 and 4, when present

Power supply
RD2: 230÷400 V a.c.
RD2-48: 48÷150 V a.c./d.c.

Quick product references

RCDs wiring diagrams

RD3 - undervoltage release wiring

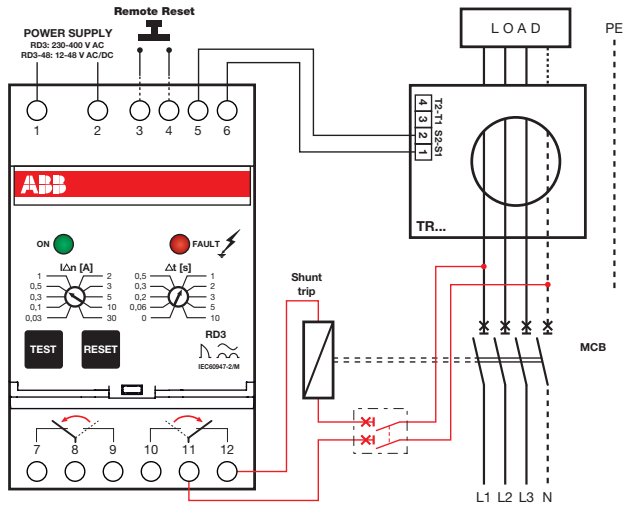

RD3 - shunt trip wiring

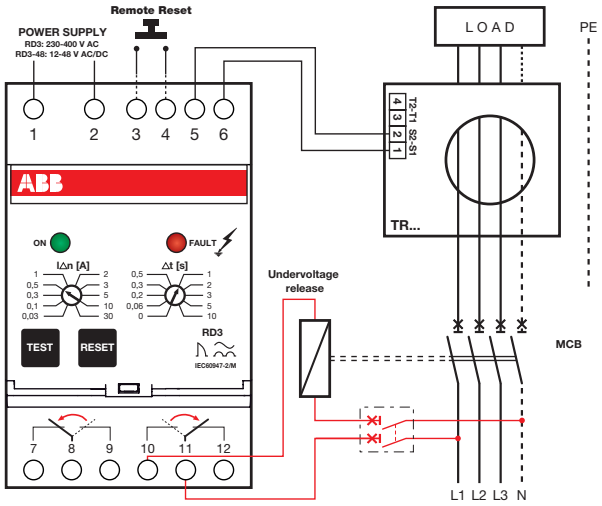

* The residual current protection is not active when this circuit breaker is switch-off

ELR48P - shunt trip wiring

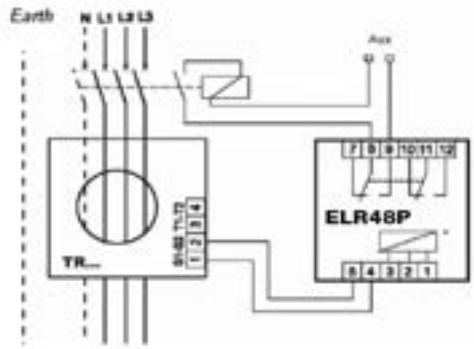

ELR48P - undervoltage release wiring

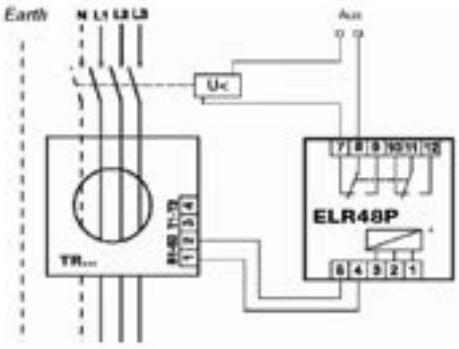

ELR72 - shunt trip wiring

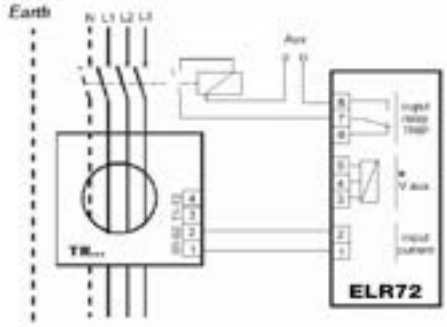

ELR72 - undervoltage release wiring

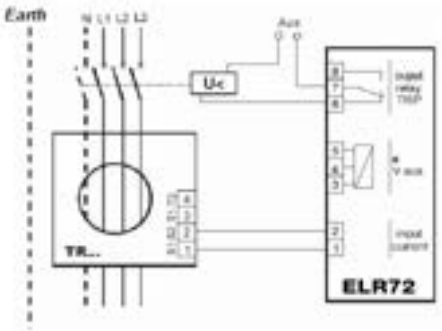

Quick product references

RCDs wiring diagrams

ELR96 - shunt trip wiring

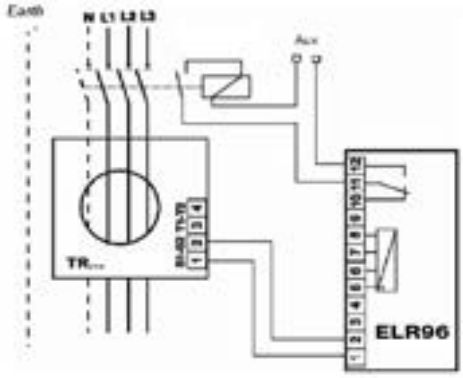

ELR96 - undervoltage release wiring

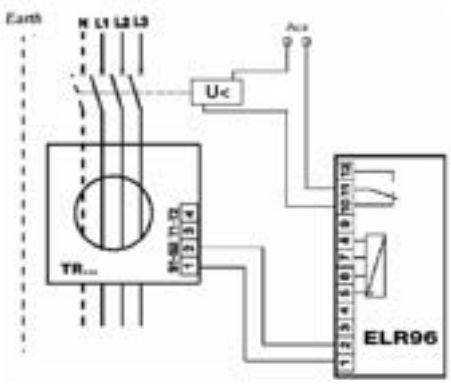

ELR72P - shunt trip wiring

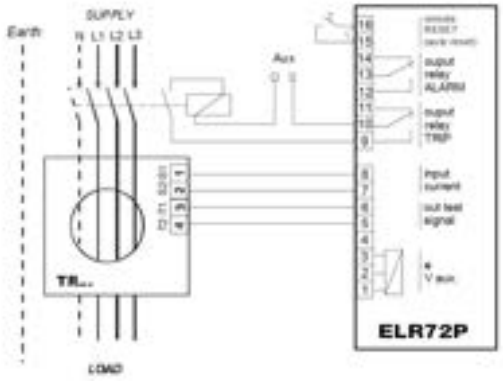

ELR72P - undervoltage release wiring

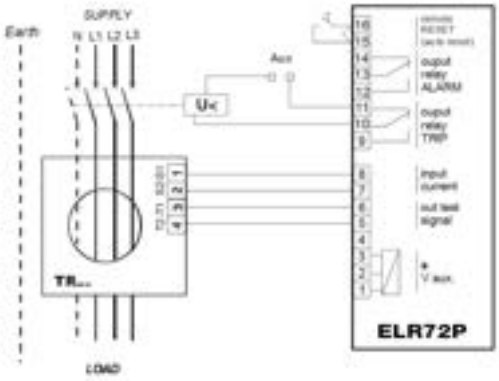

Quick product references

RCDs wiring diagrams

ELR96P - shunt trip wiring

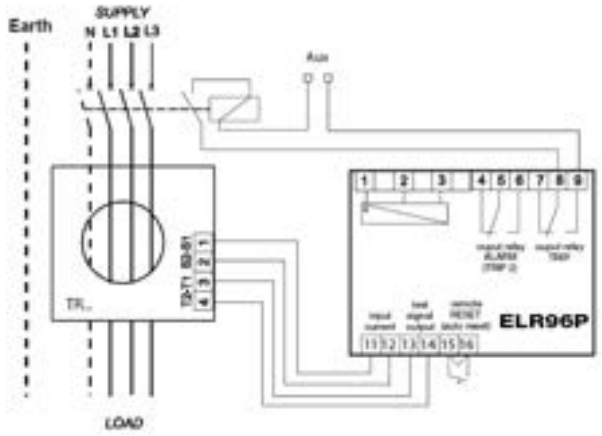

ELR96P - undervoltage release wiring

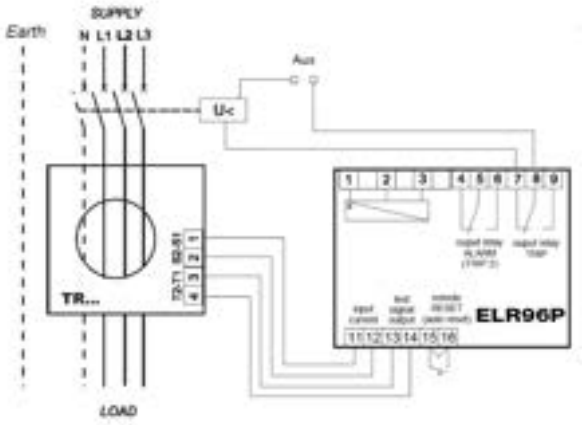

ELR96PF - shunt trip wiring

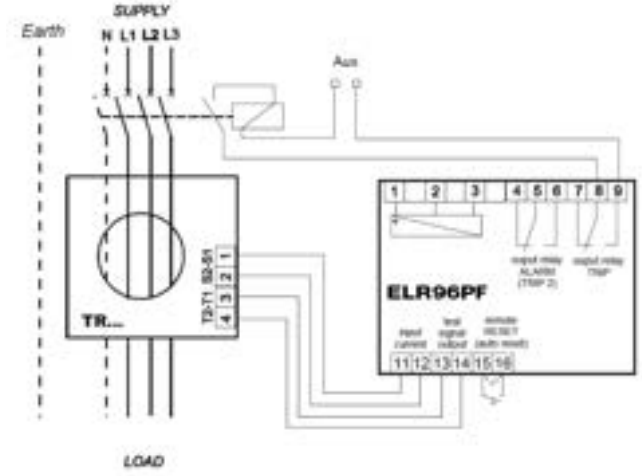

ELR96PF - undervoltage release wiring

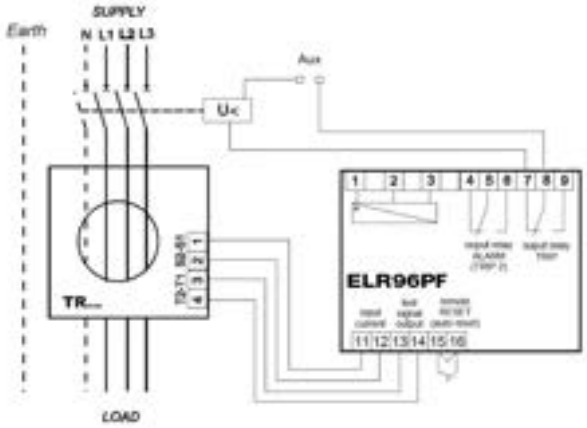

ELR96PD - shunt trip wiring

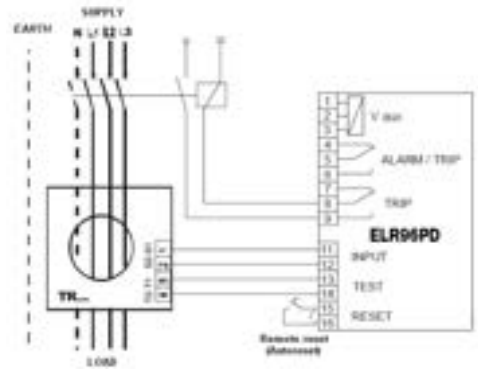

ELR96PD - undervoltage release wiring

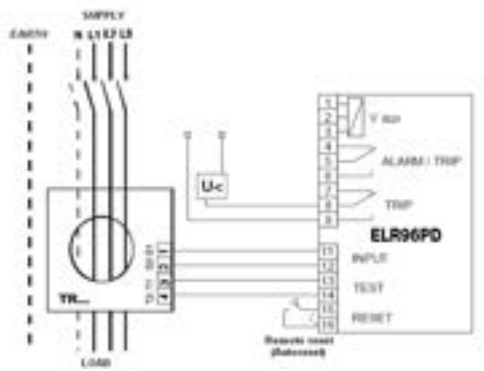

Quick product references

Auxiliary elements

S2C-S/H6R



S2C-H6R



S2C-H6-11R



S2C-H6-20R



S2C-H6-02R



SCC-S



SCC-IH



ABB has a full product range of auxiliary contacts completed by the S2C-S/H6R universal contacts. An auxiliary contact indicates the position of the MCB. A signal contact indicates the MCB position plus the fault event, i.e., overload or short-circuit.

Quick product references

Auxiliary elements

Wiring diagrams for S2C-CM motor operating devices

Low voltage use: 12...30 V AC, 12...48 V DC

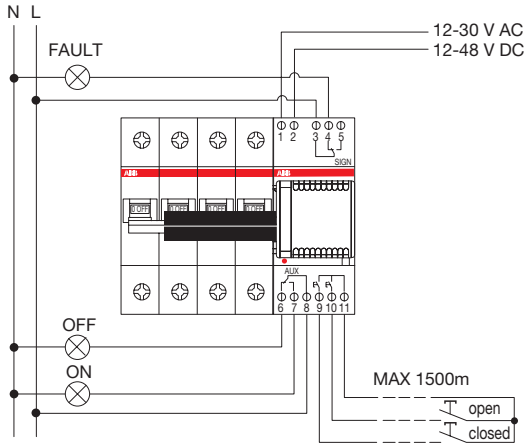

Use at 230 V AC via a TM15/12 bell transformer

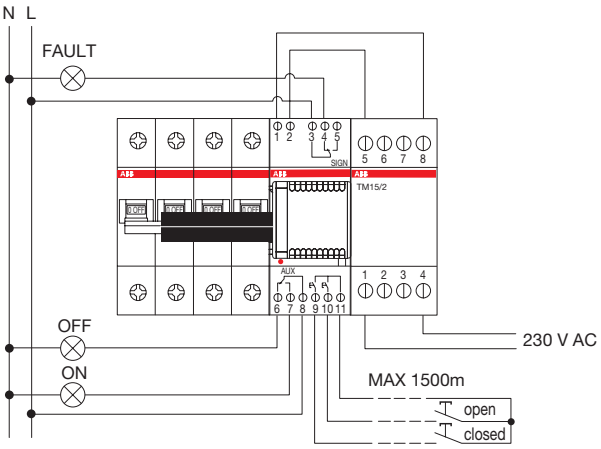

Low voltage use of several motor operating devices: 12...30 V AC, 12...48 V DC

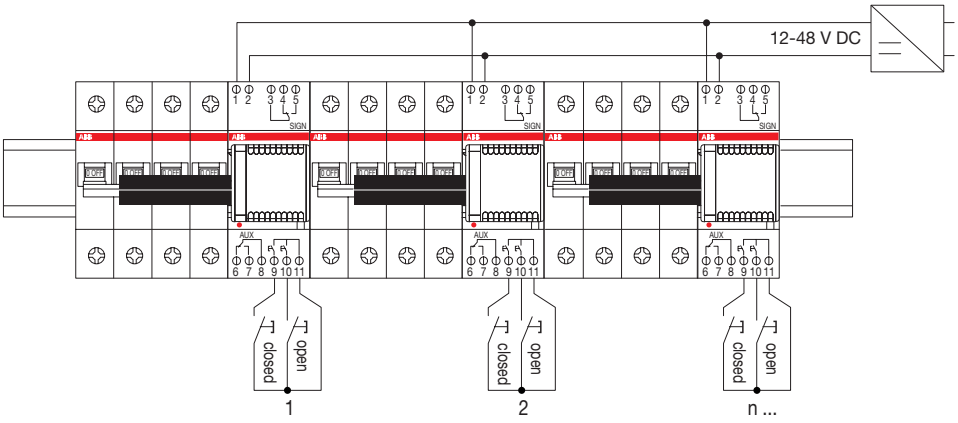

Use of several motor operating devices at 230 V AC via a single safety transformer

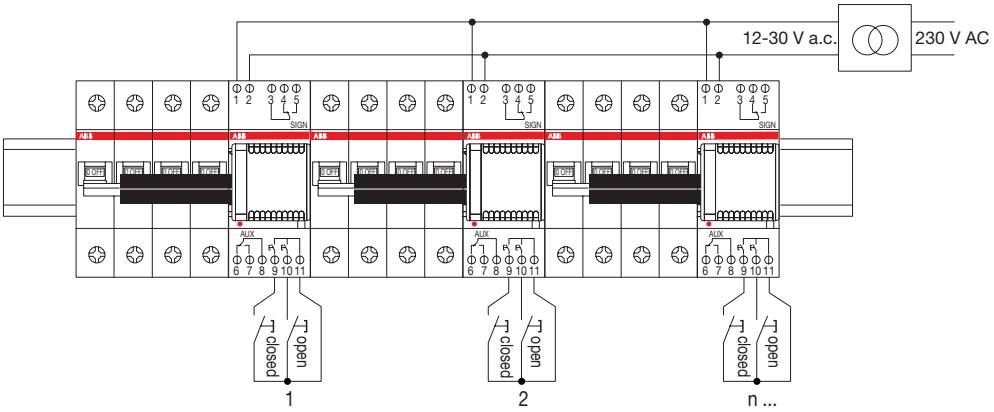

Quick product references

Auxiliary elements

Wiring diagrams for DS2C-CM motor operating devices

Low voltage use 12...30 V AC, 12...48 V DC

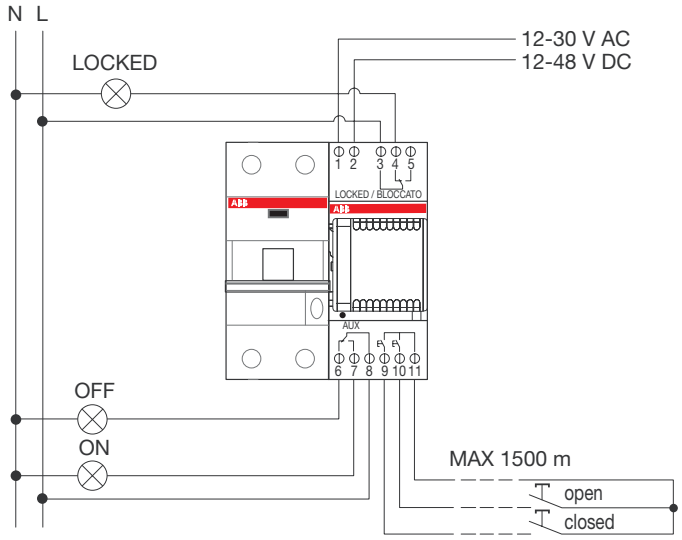

Use at 230 V AC via a TN15/12 transformer

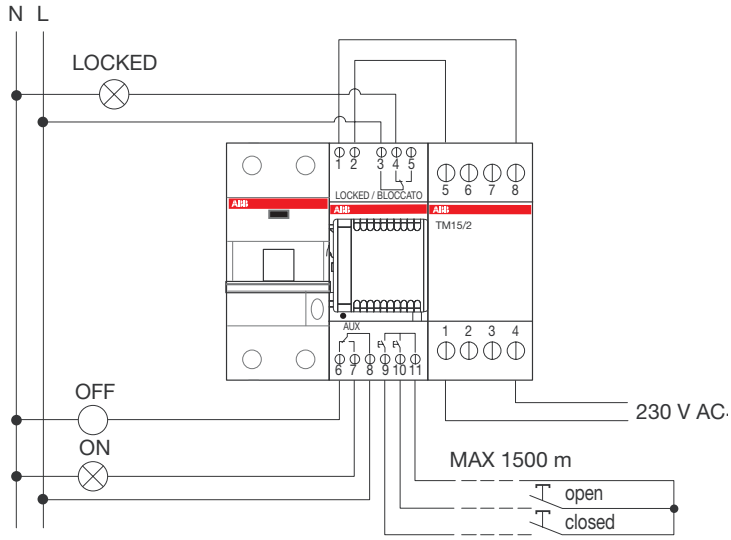

Quick product references

Auxiliary elements

Wiring diagrams for motor operating device F2C-CM and F2C-ARI auto-reclosing unit

Low voltage use: 12...30 V AC, 12...48 V DC

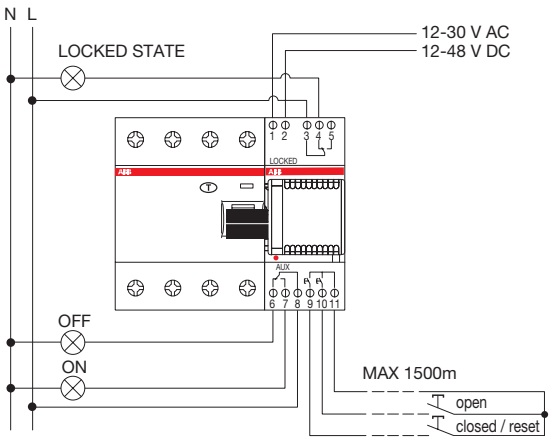

Use at 230 V AC via a TM15/12 bell transformer

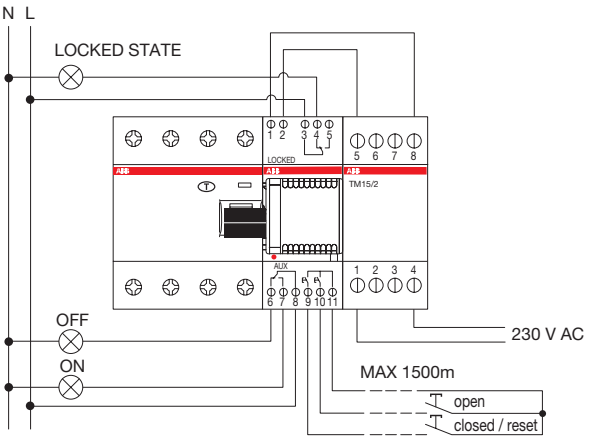

Low voltage use of several motor operating devices or auto-reclosing units: 12-30 V AC, 12-48 V DC

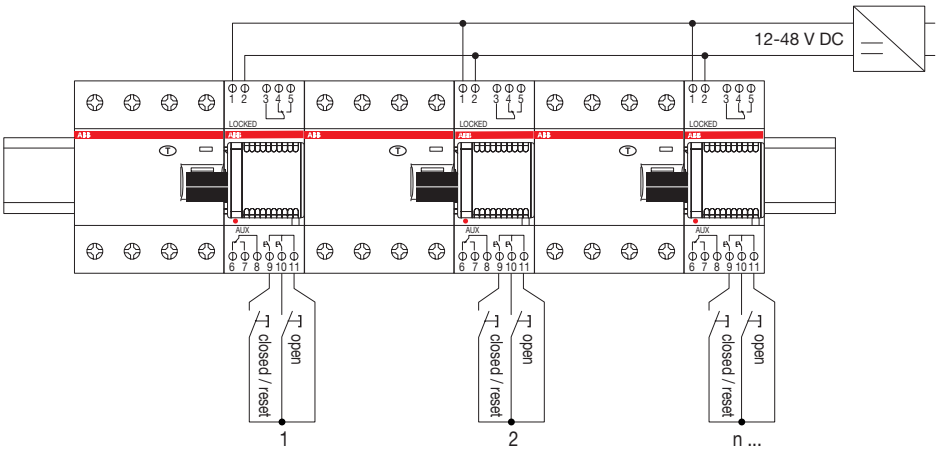

Use of several motor operating devices or auto-reclosing units at 230 V AC via a single transformer

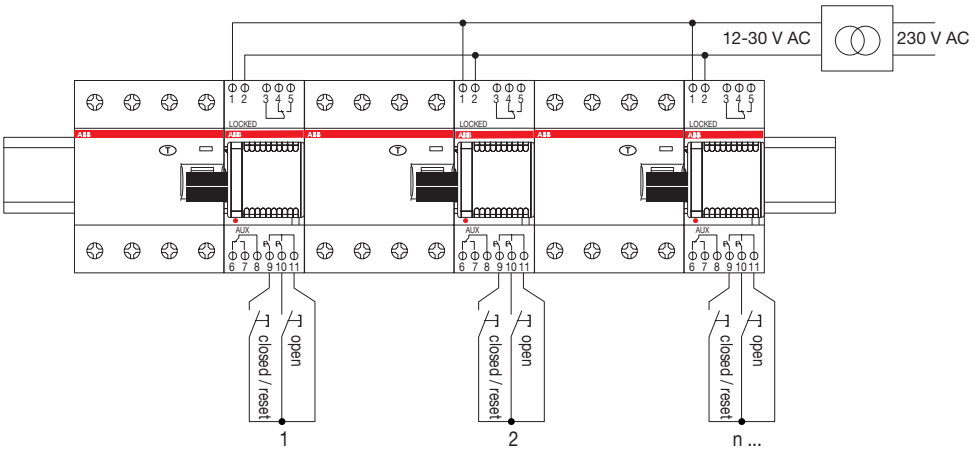

Quick product references

Auxiliary elements

Wiring diagram for F2 CM4 motor operating devices

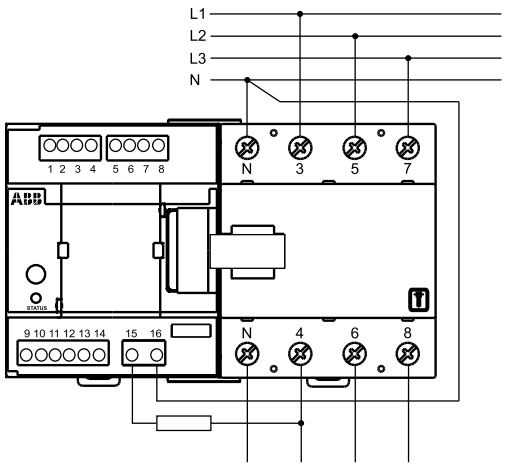

Wiring diagram for F2C-ARH and F2C-ARH-T

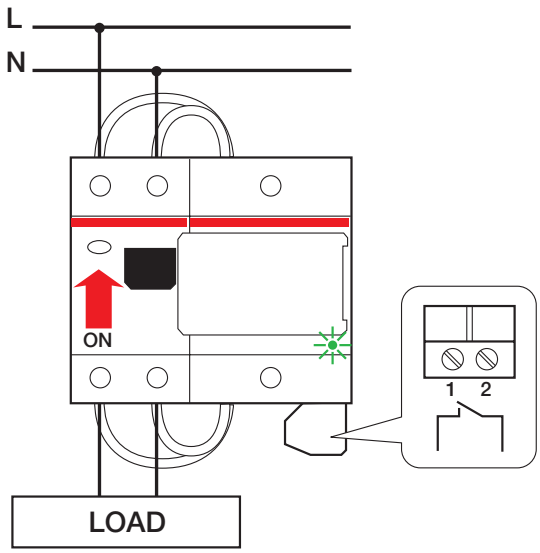

Quick product references

Protection and safety wiring diagrams

Surge Protective Devices - Photovoltaic SPDs - OVR PV



OVR PV T1-T2 QS / OVR PV T2

Surge Protective Devices - Type 1+2 25/ 12.5/Type 2/ Type 2+3

Pluggable Type 1+2 12.5/Type 2/ Type 2+3

Single Pole Type 1+2 25 SPD with remote indicator (TS)



OVR T1-T2 1L 25-255 P

Single pole Type 1+2 12.5/Type 2 SPD with safety reserve (s)



OVR T2 40-275s P QS,
OVR T2 80 275s P QS,
OVR T2 40-440s P QS,
OVR T2 80-440s P QS,
OVR T1-T2 12.5-275s P QS,
OVR T1-T2 12.5-440s P QS

Single pole Type 1+2 12.5/Type 2 SPD with safety reserve (s) and remote indication (TS)



OVR T2 40-275s P TS QS,
OVR T2 80-275s P QS,
OVR T2 40-440s P TS QS,
OVR T2 80-440s P TS QS

Single pole Type 2 SPD



OVR T2-T3 20-275 P QS,
OVR T2 40-275 P QS,
OVR T2-T3 20-440 P QS,
OVR T2 40-275 P QS,
OVR T2 40-350 P QS,
OVR T2 40-350 P TS QS

Single pole Type 2/Type 2+3 SPD with remote indication (TS)



OVR T2-T3 20-275 P TS QS,
OVR T2 40-275 P TS QS,
OVR T2-T3 20-440 P TS QS,
OVR T2 40-440 P TS QS

Surge Protective Devices - Type 1+2 25/ 12.5/Type 2/ Type 2+3

Multipole Type 2/ Type 2+3 SPD



OVR T2-T3 1N 20-275 P QS,
OVR T2 1N 40-275 P QS,
OVR T2 1N 40-350 P QS



OVR T2-T3 3L 20-275 P QS,
OVR T2 3L 40-275 P QS,
OVR T2 3L 40-350 P QS



OVR T2-T3 4L 20-275 P QS,
OVR T2 4l 40-275 P QS



OVR T2-T3 3N 20-275 P QS,
OVR T2 3N 40-275 P QS,
OVR T2 3N 40-350 P QS

Multipole Type 1+2 12.5 / Type 2 SPD with safety reserve (s)



OVR T2 1N 40-275s P QS,
OVR T2 1N 80-275s P QS



OVR T2 3L 40-275s P QS,
OVR T2 3L 80-275s P QS,
OVR T1-T2 3L 12.5-275s P QS,
OVR T1-T2 3L 12.5-440s P QS



OVR T2 4L 40-275s P QS,
OVR T2 4L 80-275s P QS,
OVR T1-T2 4L 12.5-275s P QS,
OVR T1-T2 4L 12.5-440s P QS



OVR T2 3N 40-275s P QS,
OVR T2 3N 80-275s P QS,
OVR T1-T2 3N 12.5-275s P QS,
OVR T1-T2 3N 12.5-440s P QS

Quick product references

Protection and safety wiring diagrams

Surge Protective Devices - Type 1+2 25/ 12.5/Type 2/ Type 2+3

Multipole Type 2/ Type 2+3SPD with remote indication (TS)



OVR T2-T3 1N 20-275 P TS QS,
OVR T2 1N 40-275 P TS QS,
OVR T2 1N 40-350 P TS QS



OVR T2-T3 3L 20-275 P TS QS,
OVR T2 3L 40-275 P TS QS,
OVR T2 3L 40-350 P TS QS



OVR T2-T3 4L 20-275 P TS QS,
OVR T2 4l 40-275 P TS QS



OVR T2-T3 3N 20-275 P TS QS,
OVR T2 3N 40-275 P TS QS,
OVR T2 3N 40-350 P TS QS

Multipole Type 1+2 12.5/Type 2 SPD with safety reserve (s) and remote indication (TS)



OVR T2 1N 40-275s P TS QS,
OVR T2 1N 80-275s P TS QS,
OVR T1-T2 1N 12.5-275s P TS QS,
OVR T1-T2 1N 12.5-440s P TS QS



OVR T2 3L 40-275s P TS QS,
OVR T2 3L 80-275s P TS QS,
OVR T1-T2 3L 12.5-275s P TS QS,
OVR T1-T2 3L 12.5-440s P TS QS



OVR T2 4L 40-275s P TS QS,
OVR T2 4L 80-275s P TS QS,
OVR T1-T2 4L 12.5-275s P TS QS,
OVR T1-T2 4L 12.5-440s P TS QS



OVR T2 3N 40-275s P TS QS,
OVR T2 3N 80-275s P TS QS,
OVR T1-T2 3N 12.5-275s P TS QS,
OVR T1-T2 3N 12.5-440s P TS QS

Multipole Type 1+2 25 SPD with remote indicator (TS)



OVR T1-T2 1N 50-255 P TS



OVR T1-T2 3L 75-255 P TS



OVR T1-T2 3N 100-255 P TS



OVR T1-T2 4L 100-255 P TS

Quick product references

Protection and safety wiring diagrams

E90 fuse switch disconnectors

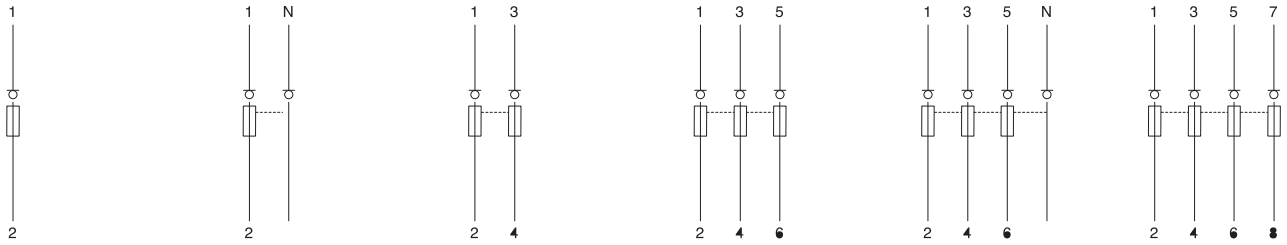

E 90 with blown fuse indicator light in alternate current

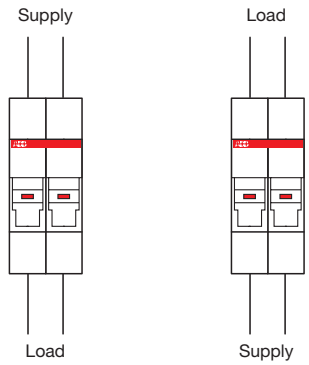

For direct current systems please refer to E 90 PV wiring diagram

E90h fuse holders



E90 fuse disconnectors and E90/30 CC fuse holders

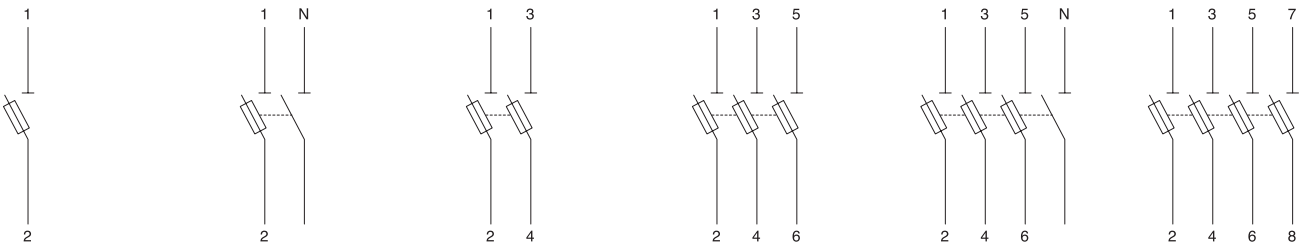

Quick product references

Protection and safety wiring diagrams

E90 PV fuse disconnectors



E 90 PV with blown fuse indicator light in direct current

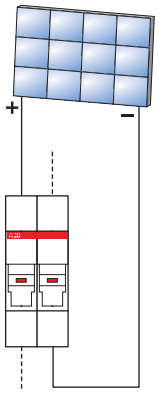

In direct current systems, since the LED allows the current to flow only from positive to negative, the wiring of the blown fuse indicator version should follow the current direction as shown in the diagram

E90 50/125 fuse disconnectors

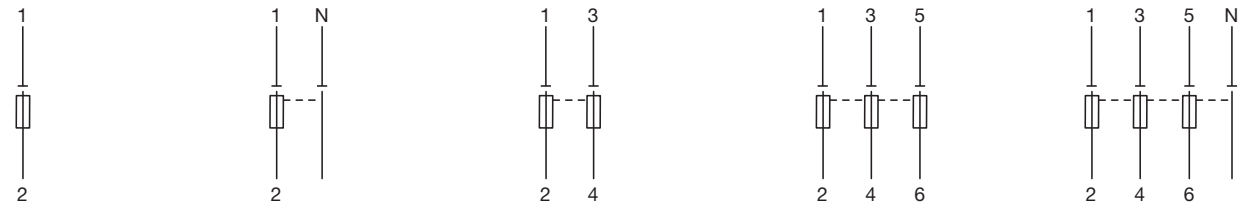

E90 30/60 J fuse holders

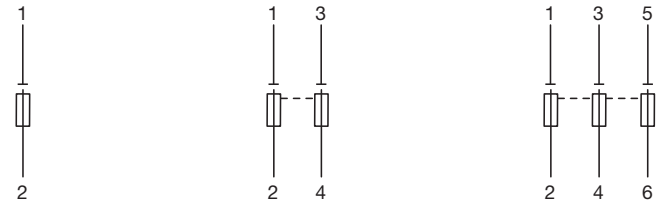

ILTS-E

Quick product references

Protection and safety wiring diagrams

Electronic protection devices | 4 channel

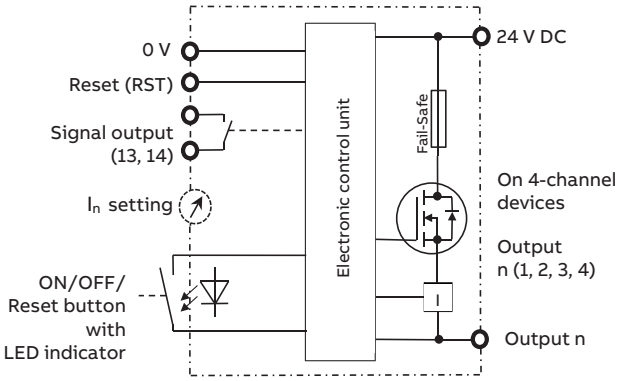

Electronic protection devices | 1 channel

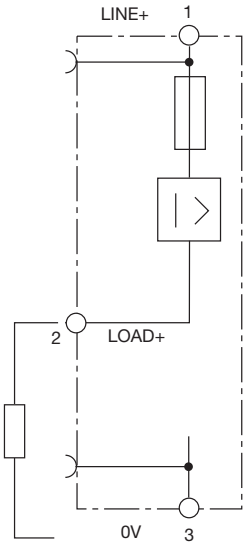

EPD24-TB-101
without signal input
with signal output F
(single signal, NO)
Operating condition: 13-14 closed
Fault condition: 13-14 open

SQZ3

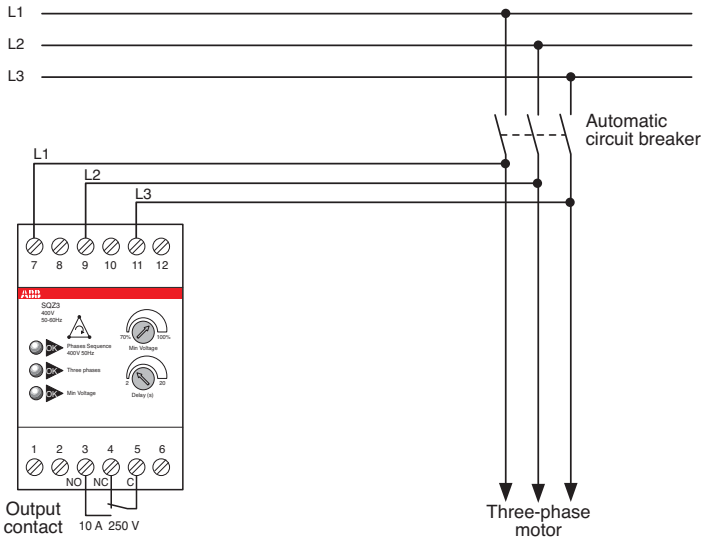

E 236 US 1, E 236 US 2



E236-US 1.1 and US 2.1

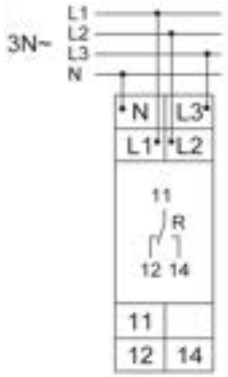

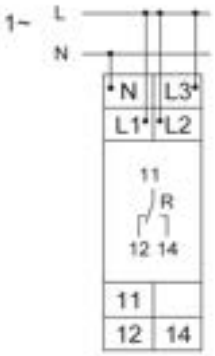

E236-US 1.1D

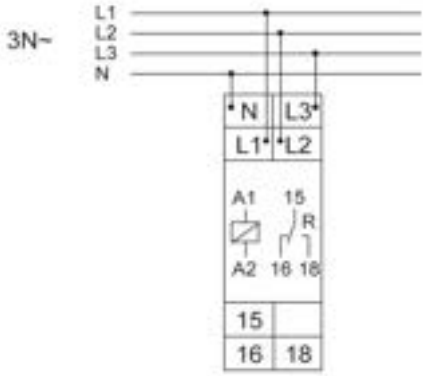

Quick product references

Protection and safety wiring diagrams

ISOLTESTER-DIG, QSD-DIG and SELVTESTER-24 - with transformer with central socket (PC)

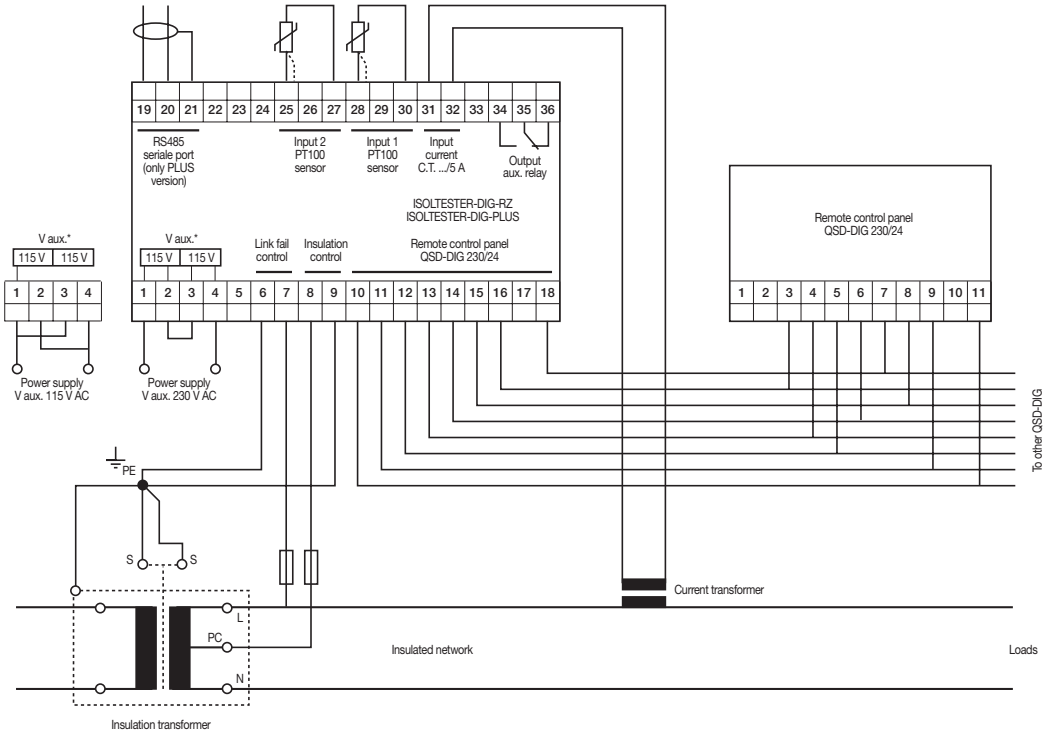

ISOLTESTER-DIG, QSD-DIG and SELVTESTER-24 -

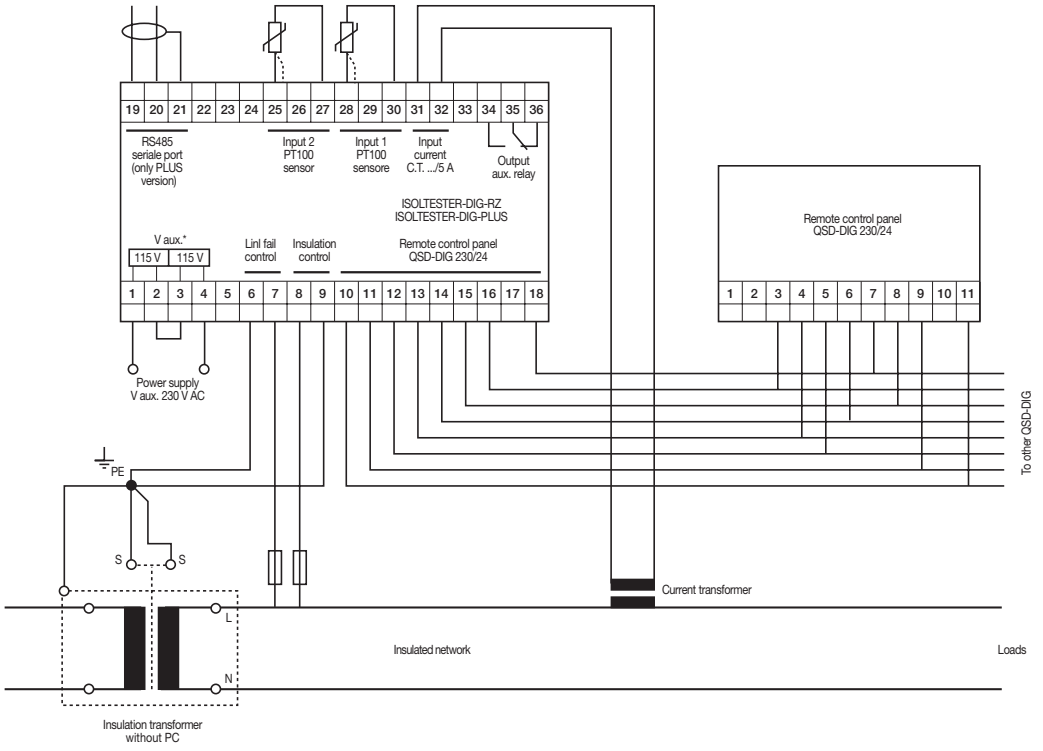

Quick product references

Protection and safety wiring diagrams

ISOLTESTER-DIG, QSD-DIG and SELVTESTER-24 -

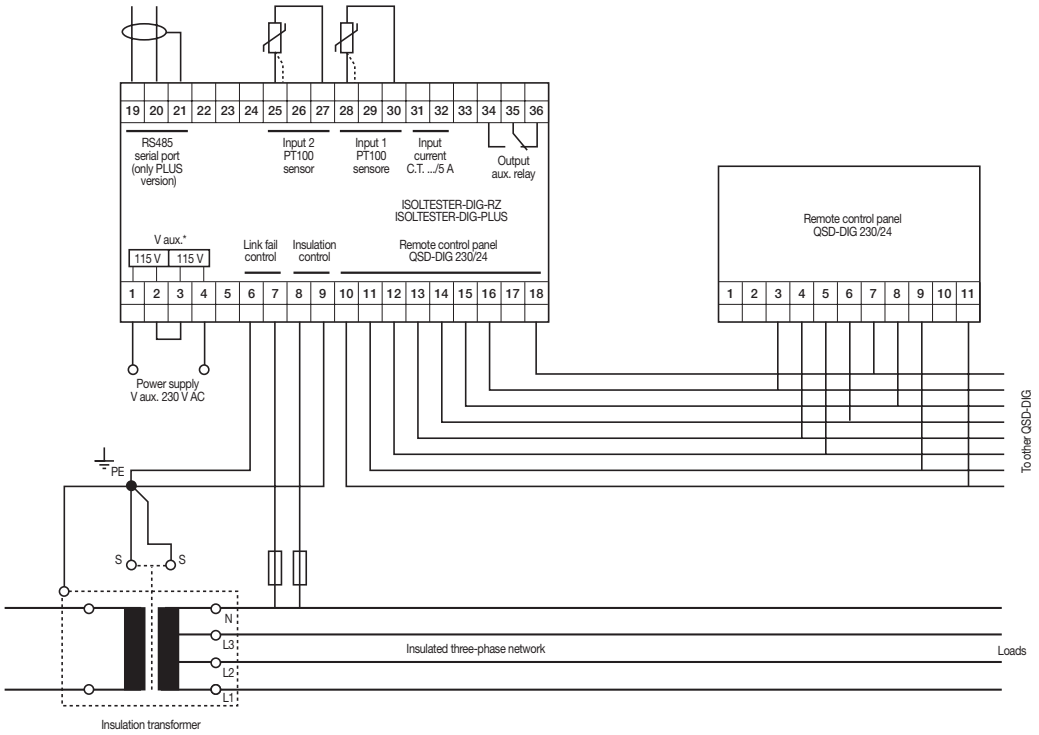

ISOLTESTER-DIG, QSD-DIG and SELVTESTER-24 -

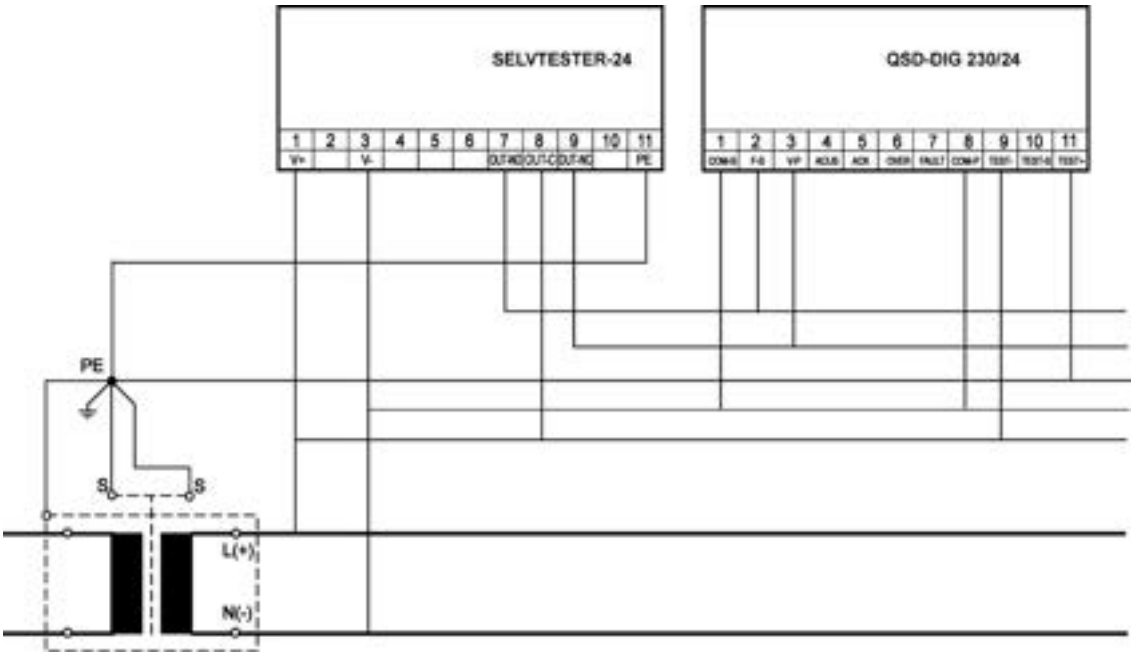

Quick product references

Protection and safety wiring diagrams

ISL-A 24-48

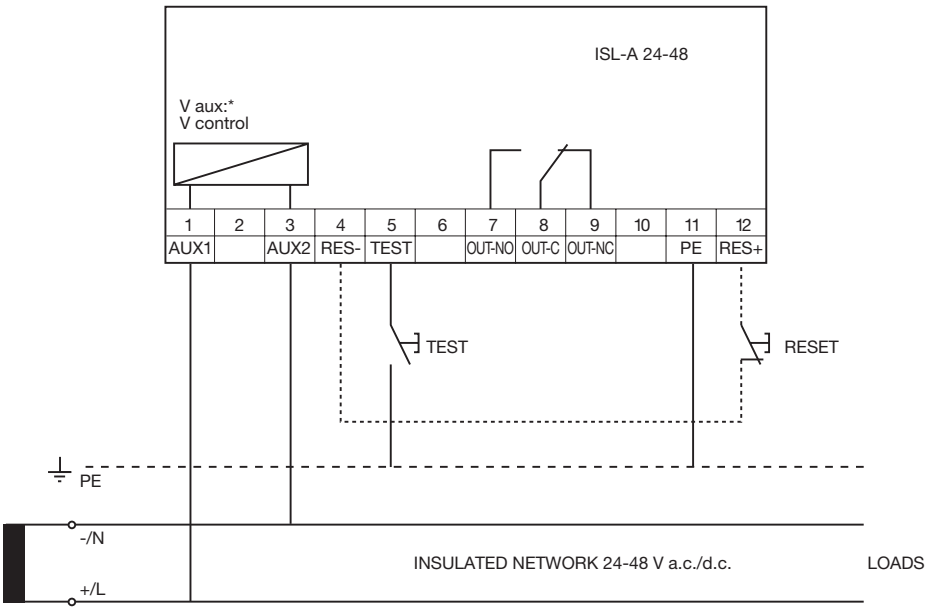

MICROSWITCH SETTINGS

The front microswitches allow the insulation threshold level to be adjusted between 10 and 60 kW, as shown below:



Quick product references

Protection and safety wiring diagrams

ISL-A 115 and ISL-A 230

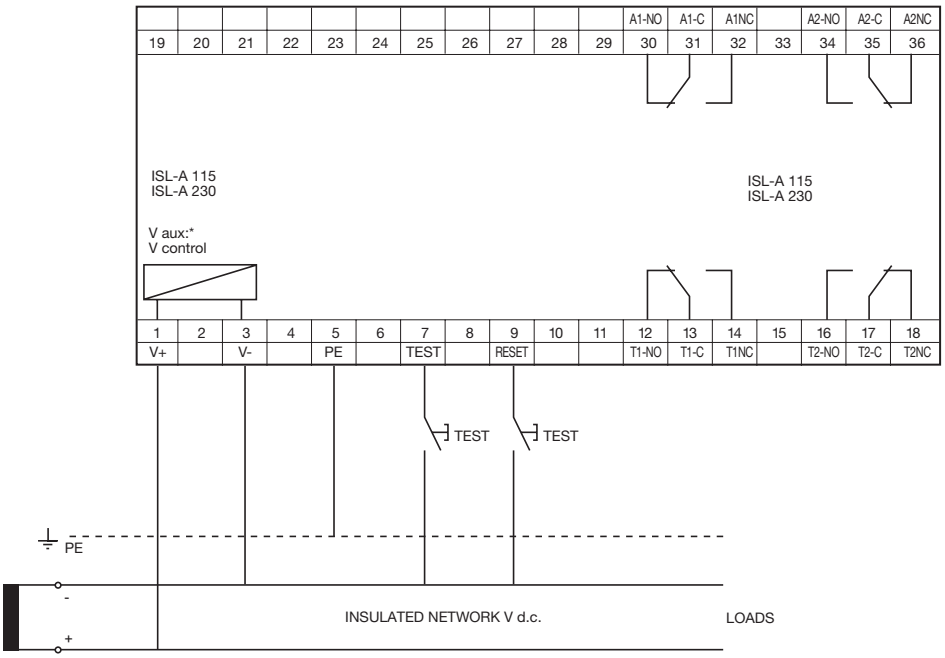

MICROSWITCH SETTINGS

The front microswitches are used for adjusting the insulation threshold level, enabling the fail-safe function and configuring the reset mode for both the alarm and trip thresholds.

Microswitches A, B, C, D for programming the trip and alarm thresholds:

ALARM		TRIP	
300 kΩ:	A=0, B=0, C=0, D=0	100 kΩ:	A=0, B=0, C=0, D=0
150 kΩ:	A=1, B=0, C=0, D=0	60 kΩ:	A=1, B=0, C=0, D=0
80 kΩ:	A=1, B=1, C=0, D=0	40 kΩ:	A=1, B=1, C=0, D=0
50 kΩ:	A=1, B=1, C=1, D=0	20 kΩ:	A=1, B=1, C=1, D=0
30 kΩ:	A=1, B=1, C=1, D=1	10 kΩ:	A=1, B=1, C=1, D=1

Microswitch E for configuring the FAIL SAFE mode

E=0 fail safe mode disabled

E=1 fail safe mode enabled

Microswitch F for configuring the RESET mode

F=0 manual reset

F=1 automatic reset

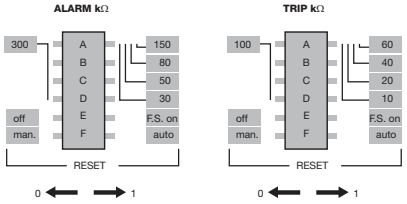

Quick product references

Protection and safety wiring diagrams

ISL-A 600

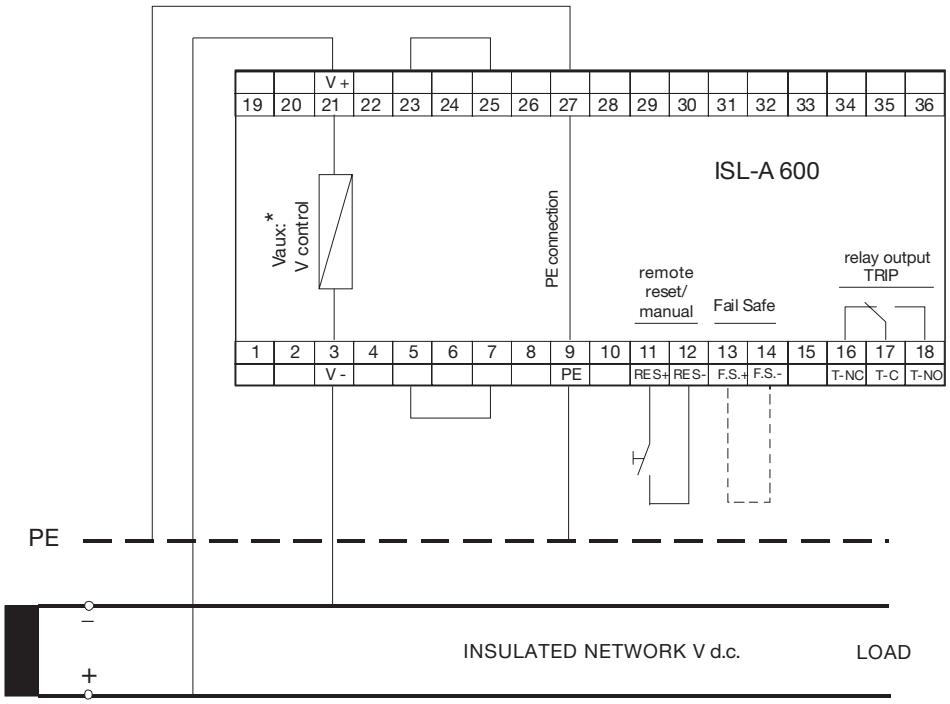

ISL-C 230

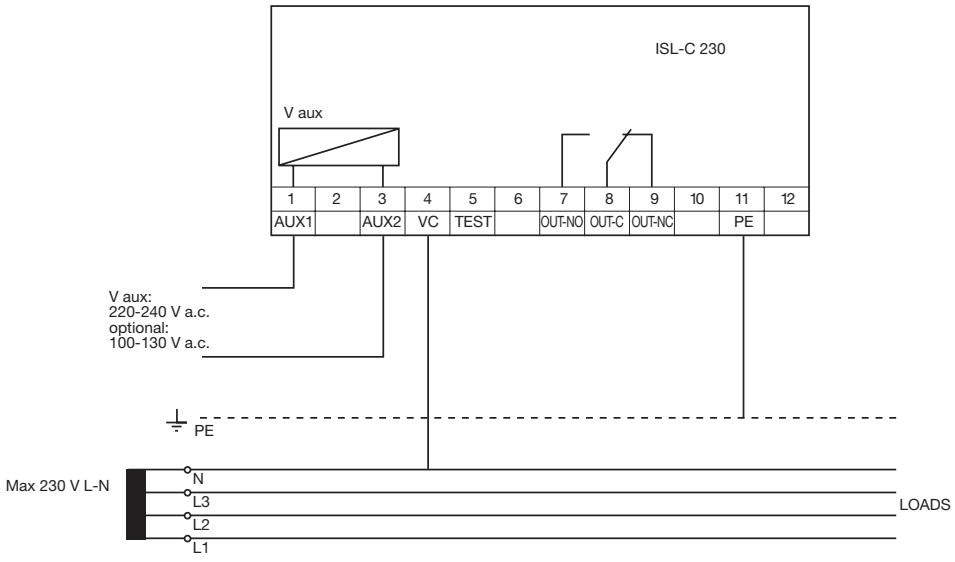

Quick product references

Protection and safety wiring diagrams

ISL-C 440

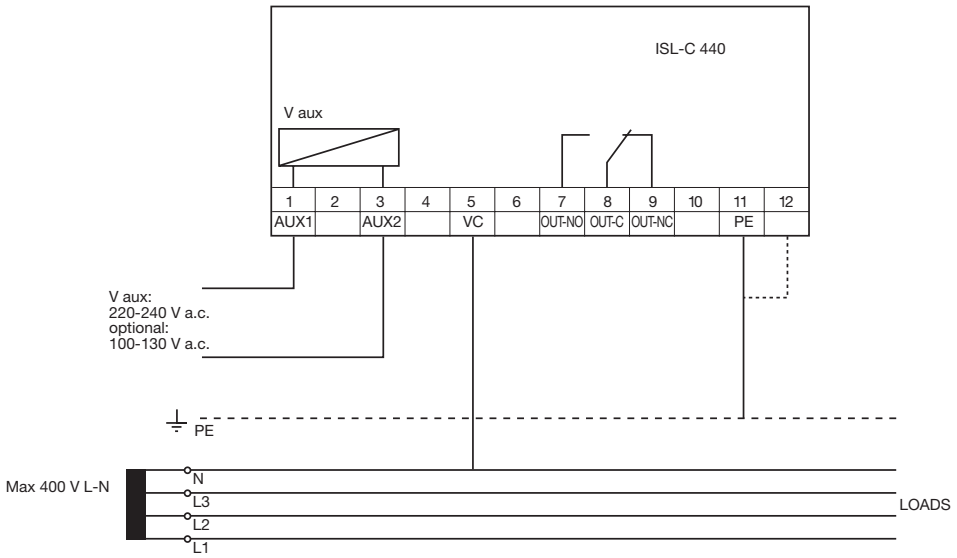

MICROSWITCH SETTINGS

The front microswitches are used for adjusting the insulation threshold level between 10 and 150 kW, as shown below:



Quick product references

Protection and safety wiring diagrams

ISL-C 600

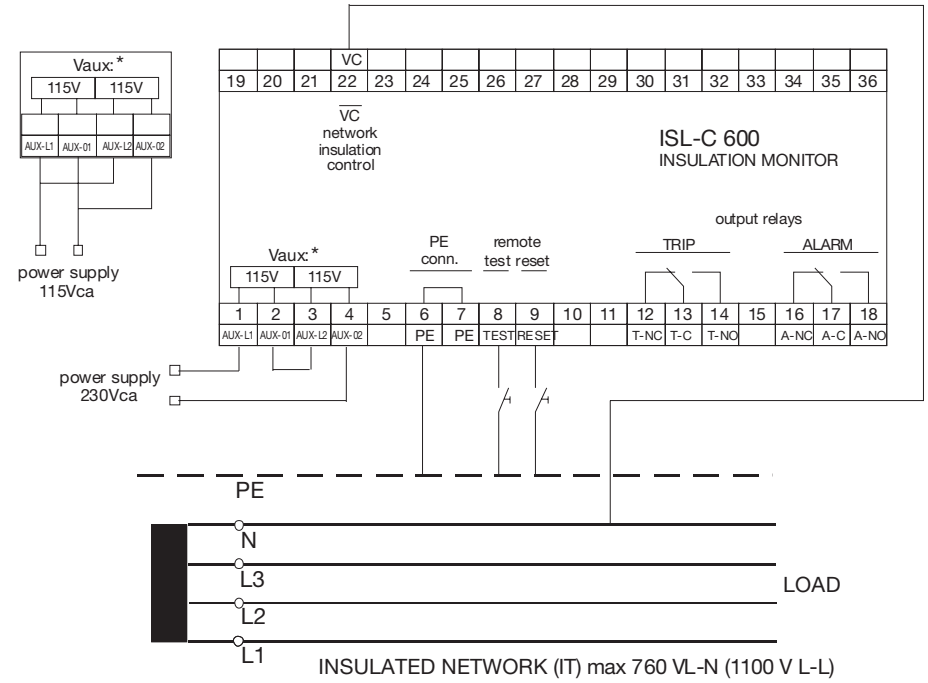

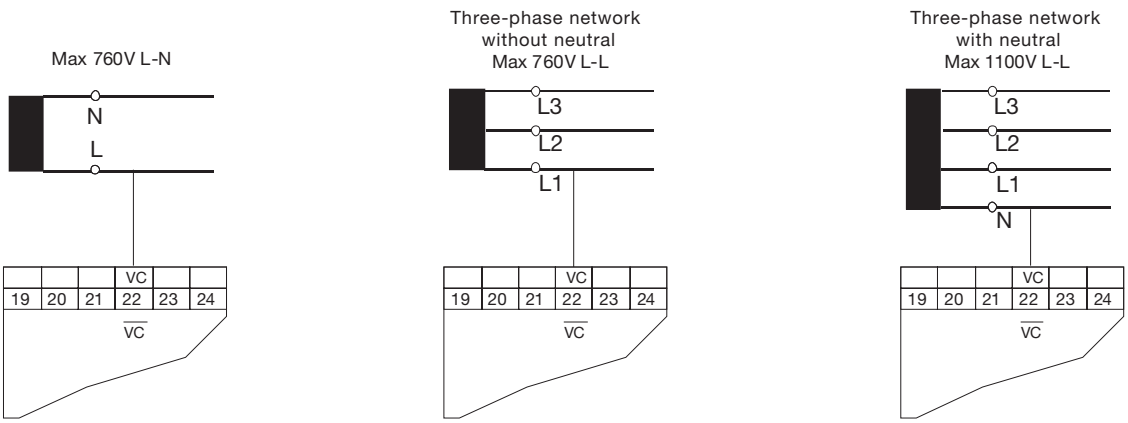

Quick product references

Protection and safety wiring diagrams

ISL-MOT 1000

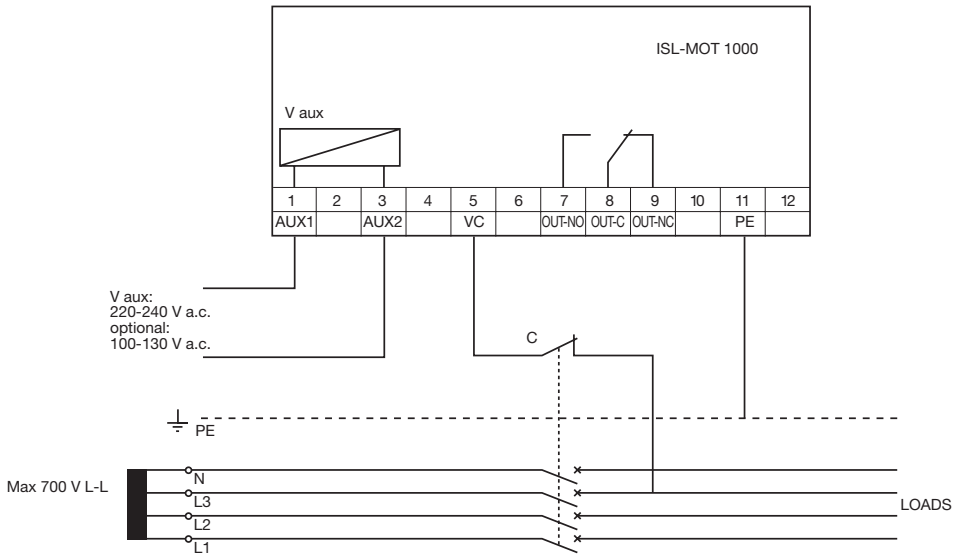

MICROSWITCH SETTINGS

The front microswitches are used for adjusting the insulation threshold level between 0.1 and 10 MW. A total of 7 microswitches are used, divided into two groups as shown below:

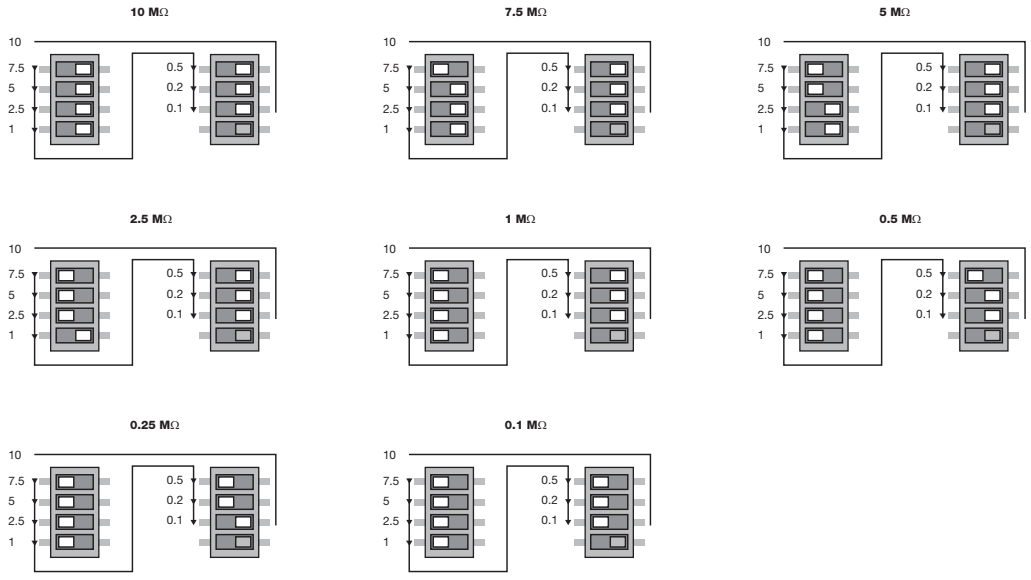

Quick product references

Protection and safety wiring diagrams

TI

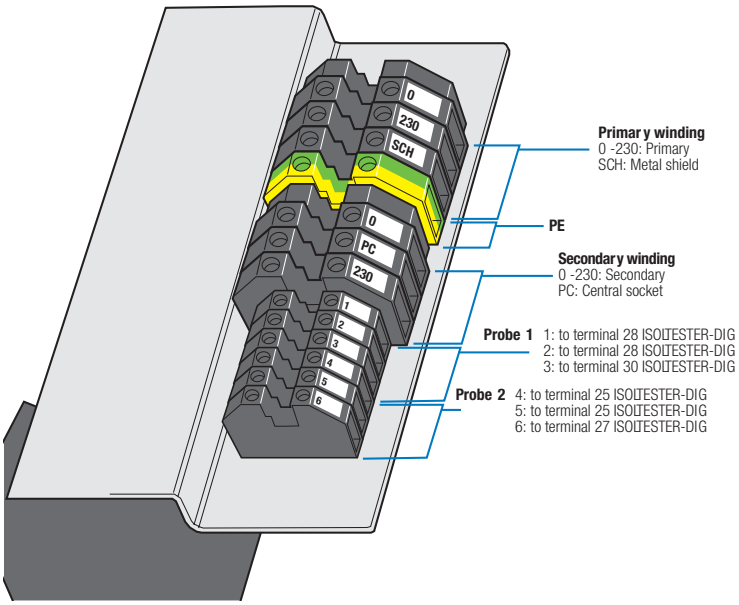

TI3

1phase IT systems

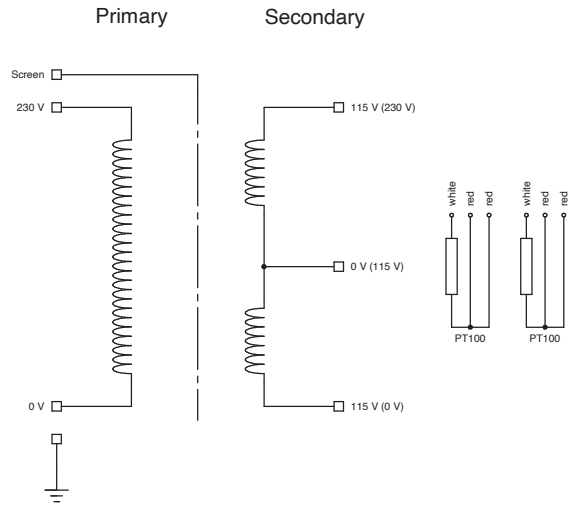

3ph IT systems

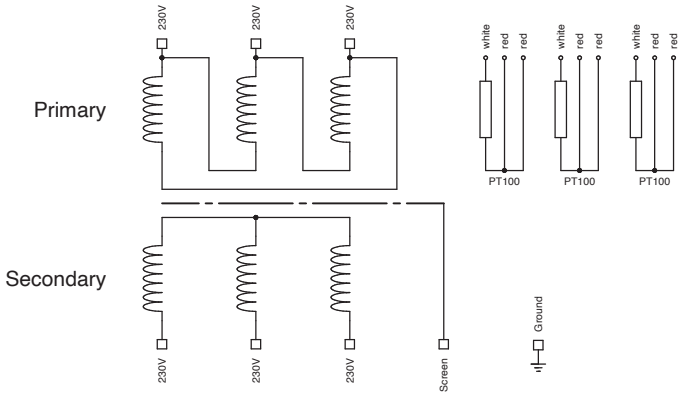

Quick product references

Command and signaling wiring diagrams

E200/SD 200/SHD 200

E210

ON / OFF switch



Off switches with indicator lamps

Change-over switches

Quick product references

Command and signaling wiring diagrams

E210 group switches





E210 control switches



E210 pushbutton

E210 luminous Pushbutton





E210 indicator Light





ESB EN

Contact Blocks

EH 04-20

EH 04-11



Quick product references

Command and signaling wiring diagrams

TM-C, TM-S, TM-I

TM-C

Label on product:
12-24 V output



115-230 V output



TM-S, TM-I

Label on product:
12-24 V output TM-S



24-48 V output TM-S



115-230 V output TM-I





Primary voltage TM-I, TM-S

		Cable 2	
		230	**400**
Cable 1	**-15**	215V	385V
	0	230V	400V
	15	245V	415V

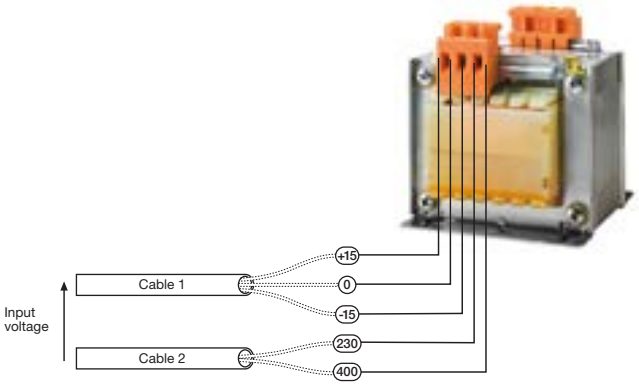

Quick product references

Command and signaling wiring diagrams

TS-C

TS10/12-24 C



TS16/12-24 C



TS25/12-24 C



TS40/12-24 C



TS63/12-24 C



TS100/12-24 C



TM

TM10/12



TM10/24



TM15/12



TM15/12 ES



TM15/24



TM30/12



TM30/24



TM40/12



TM40/24



Quick product references

Command and signaling wiring diagrams

TS

TS8/8



TS8/8 ES



TS8/12



TS8/24



TS8/8 SW



TS8/12 SW



TS8/4-6-8 SW



TS8/4-8-12 SW



TS16/8



TS16/12



TS16/8-12 ES



TS16/24



TS16/4-6-8



TS16/4-8-12



TS24/4-8-12



TS24/8-12-24



SM, RM...



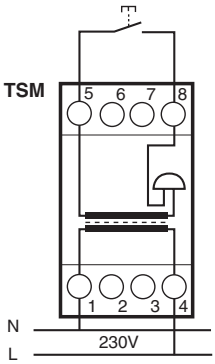

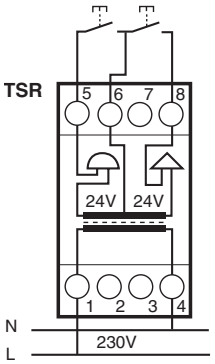

Quick product references

Control and automation wiring diagrams

E 232

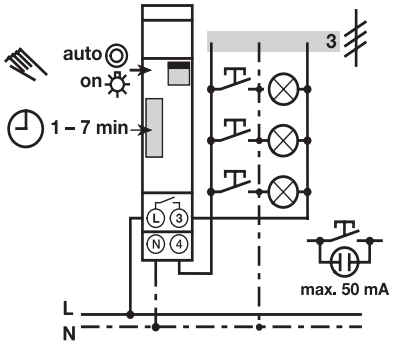

E 232-230 3 conductor



E 232-230 4 conductor

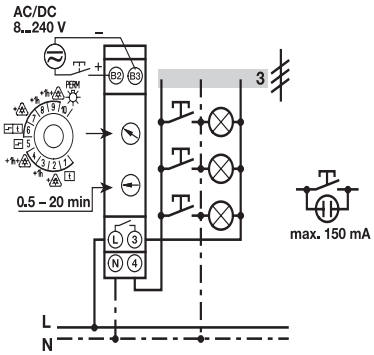

E 232E-8/230 Multi 10 3 conductor

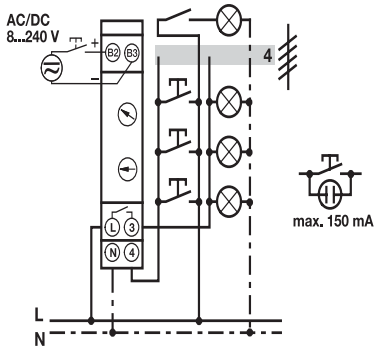

E 232E-8/230 Multi 10 4 conductor

Quick product references

Control and automation wiring diagrams

E 232

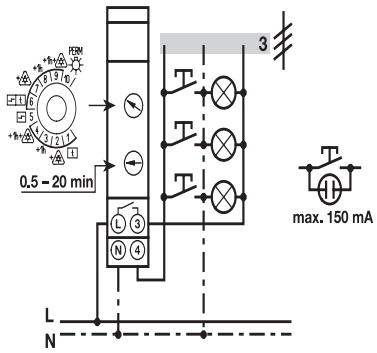

E 232E-230 Multi 10 3 conductor

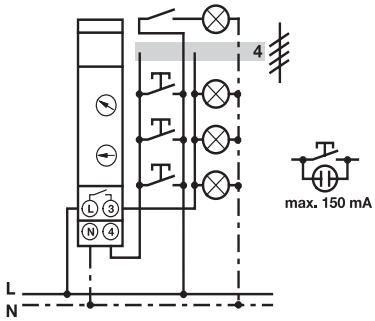

E 232E-230 Multi 10 4 conductor

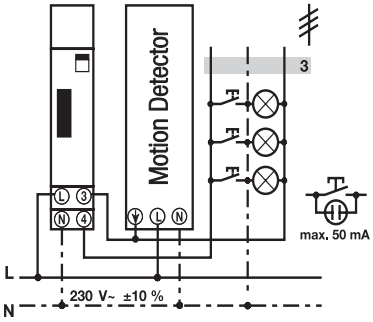

E 232E-8/230 Multi 10 3 conductor
E 232E 8/230 3 conductor
E 232E 230 Multi 10 3 conductor
E 232E 230 N 3 conductor
E 232-230 3 conductor

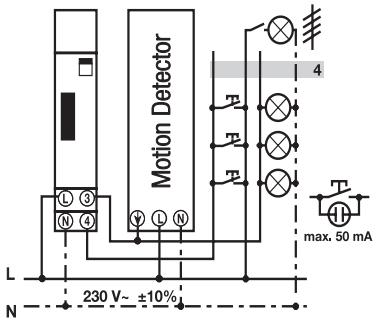

E 232E-8/230 Multi 10 4 conductor
E 232E 8/230 4 conductor
E 232E 230 Multi 10 4 conductor
E 232E 230 N 4 conductor
E 232-230 4 conductor

Quick product references

Control and automation wiring diagrams

E 234

CT-MFD.21



CT-MFD.12



CT-ERD.22



CT-ERD.12



CT-AHD.22



CT-AHD.12



CT-VWD.12



CT-EBD.12



CT-TGD.22



CT-TGD.12



CT-SDD.22



CT-SAD.22



E 234

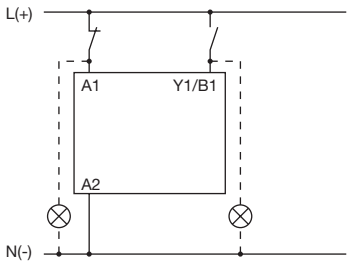

Wiring notes for devices with control input
A parallel load to the control input is possible

Quick product references

Control and automation wiring diagrams

TL1

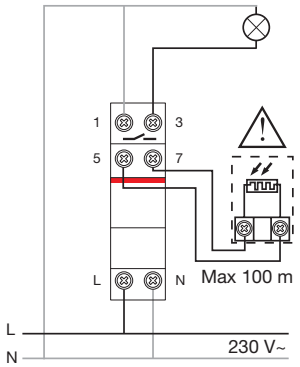

TL1 Pole

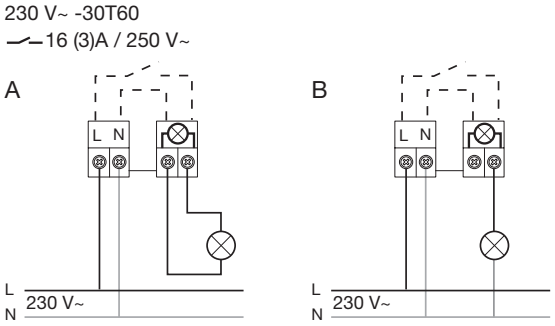

E 450

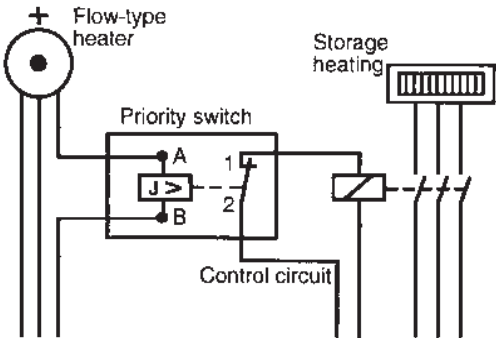

Notes

Quick product references

Energy efficiency wiring diagrams

M4M 20

Wiring diagrams - M4M 20, M4M 20 Modbus, M4M 20 Ethernet, M4M 20 I/O, M4M 20 Profibus, M4M 20 Bacnet, M4M 20-M Modbus, M4M 20-M Ethernet

The M4M 20 can be used on different type of network. According to the type of network that has been chosen, the parameters visualized on the device HMI change.

Below the wiring diagrams for M4M 20 working with CT .../5A or .../1A (M4M 20, M4M 20 Modbus, M4M 20 Ethernet, M4M 20 I/O, M4M 20 Profibus, M4M 20 Bacnet, M4M 20-M Modbus, M4M 20-M Ethernet) are shown:

- 3-phase 4-wire network with 3CTs ok for MID on M4M 20-M

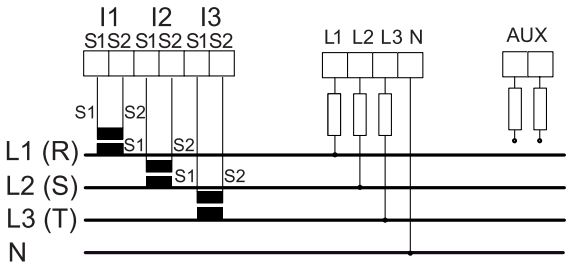

- 3-phase 4-wire network with 1CT

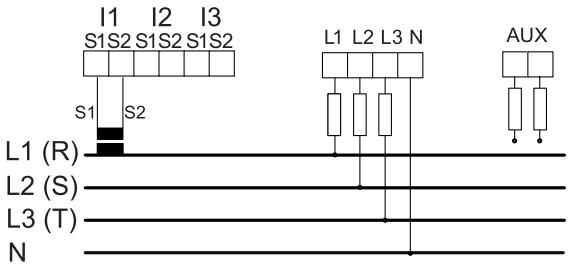

- 3-phase 3-wire network with 1CT

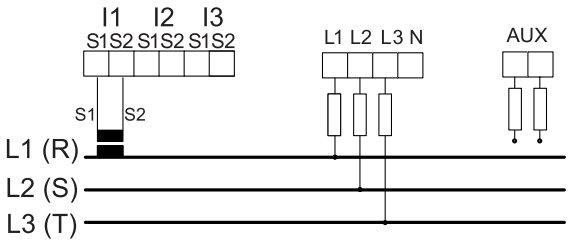

Quick product references

Energy efficiency wiring diagrams

M4M 20

- 3-phase 3-wire network with 3CTs

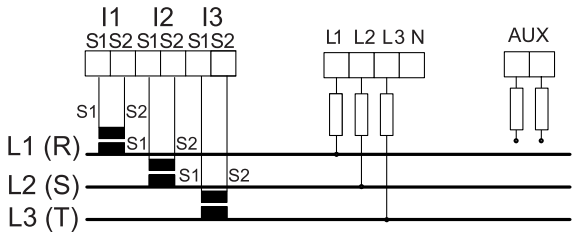

- 3-phase 3-wire network with 2CTs ok for MID on M4M 20-M

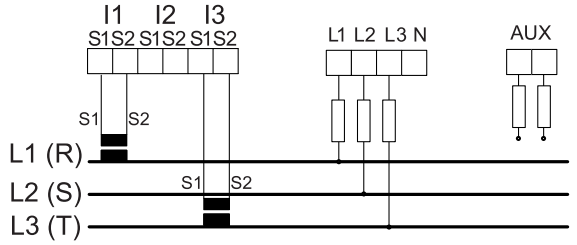

- 2-phase 3 wire network with 2CTs

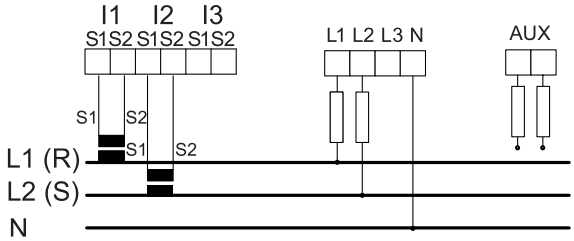

- 1-phase 2 wire network with 1CT ok for MID on M4M 20-M

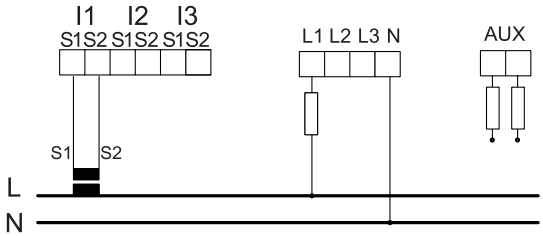

- 1-phase 2-wire network with 1CT + 1VT

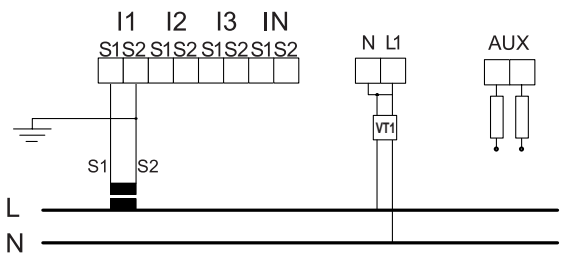

Quick product references

Energy efficiency wiring diagrams

M4M 20

- 2-phase 3-wire network with 2CT + 2VT

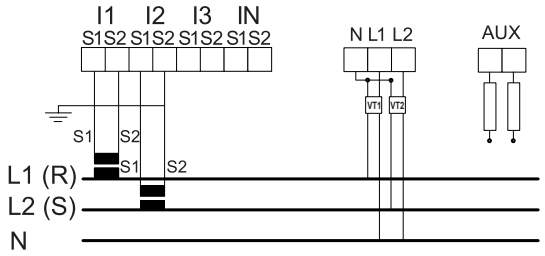

- 3-phase 4-wire network with 3CT + 3VT

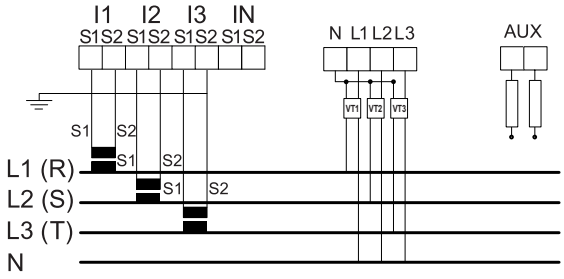

M4M 20-M (MID): In order to ensure antitampering for MID directive, only MID compliant wiring have to be selected and sealing of terminal block is mandatory.

Quick product references

Energy efficiency wiring diagrams

M4M 20

Wiring diagrams - M4M 20 Rogowski

Below the wiring diagrams for M4M 20 working with Rogowski coils (M4M 20 Rogowski) are shown:

- 3-phase 4-wire network with 3RogCTs

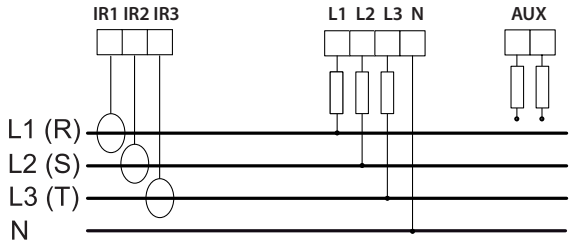

- 3-phase 4-wire network with 1RogCT

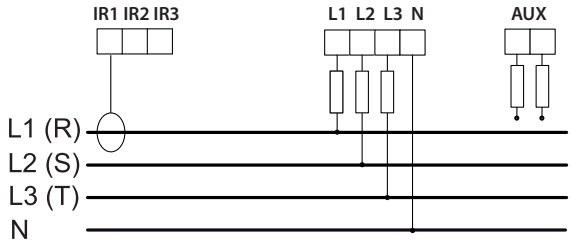

- 3-phase 3-wire network with 1RogCT

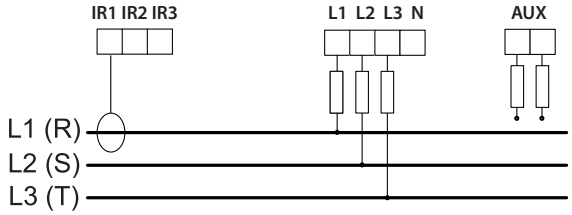

- 3-phase 3-wire network with 3RogCTs

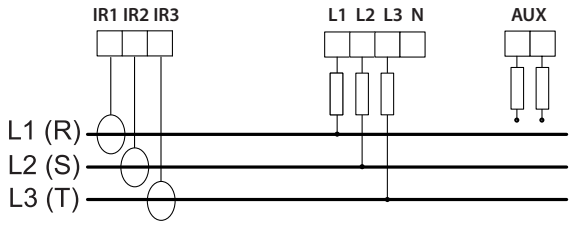

3-phase 3-wire network with 2RogCTs

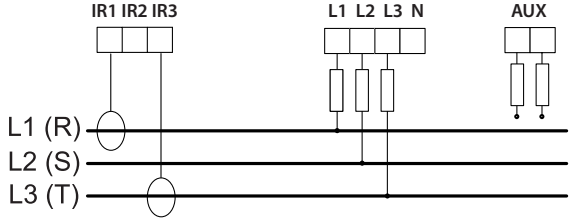

Quick product references

Energy efficiency wiring diagrams

M4M 20

- 2-phase 3-wire network with 2RogCTs

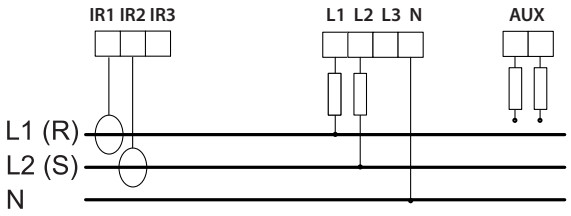

- 1-phase 2-wire network with 1RogCT

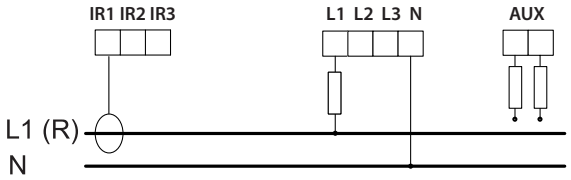

Quick product references

Energy efficiency wiring diagrams

M4M 20

Inputs and outputs connections

- Digital outputs: Alarm output with external relays for load command. Example of wiring for DO1 as alarm output COM is common for all Digital outputs:



A: V aux 48 V a.c./d.c. 100mA
B: External relay

- Digital outputs: Pulse output. Example of wiring for DO1 as pulse output COM is common for all Digital outputs:



A: V aux 48 V a.c./d.c. 100mA
C: Pulse acquisition

- Digital outputs: Alarm output with external relays for load command (available only on M4M 20 I/O). Example of wiring for I/O5 as alarm output COM is common for all Digital outputs:



A: V aux 48 V a.c./d.c. 100mA
B: External relay

- Programmable I/O: Pulse output (available only on M4M 20 I/O). Example of wiring for I/O5 as pulse output COM is common for all Digital outputs:



A: V aux 48 V a.c./d.c. 100mA
C: Pulse acquisition

- Programmable I/O: Pulse input for external pulse acquisition (available only on M4M 20 I/O):



A: 24-240VDC / 57-240VAC
B: Pulse acquisition (Impulse length at least 30 mS)

- Analogue outputs, typical load 250 Ohm, max 500 Ohm (available only on M4M 20 I/O):



Quick product references

Energy efficiency wiring diagrams

M4M 30

Wiring diagrams - M4M 30 Modbus, M4M 30 Ethernet, M4M 30 I/O, M4M 30 Profibus, M4M 30 Bacnet, M4M 30-M Modbus, M4M 30-M Ethernet

The M4M 30 can be used on different type of network. According to the type of network that has been chosen, the parameters visualized on the device HMI change.

Below the wiring diagrams for M4M 30 working with CT .../5A or .../1A (M4M 30 Modbus, M4M 30 Ethernet, M4M 30 I/O, M4M 30 Profibus, M4M 30 Bacnet, M4M 30-M Modbus, M4M 30-M Ethernet) are shown:

- 3-phase 4-wire network with 4CTs ok for MID on M4M 30-M

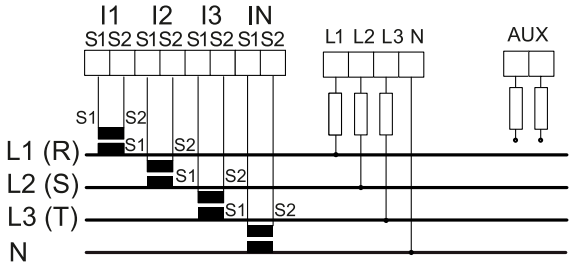

- 3-phase 4-wire network with 3CTs ok for MID on M4M 30-M

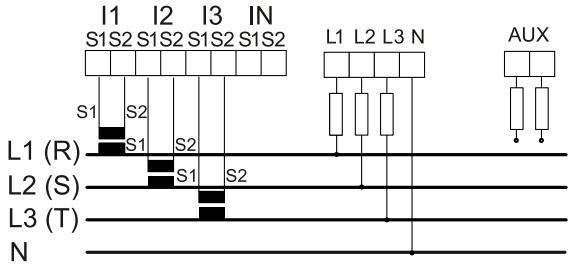

- 3-phase 4-wire network with 1CT

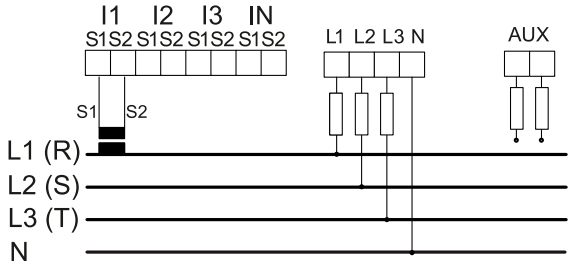

- 3-phase 3-wire network with 1CT

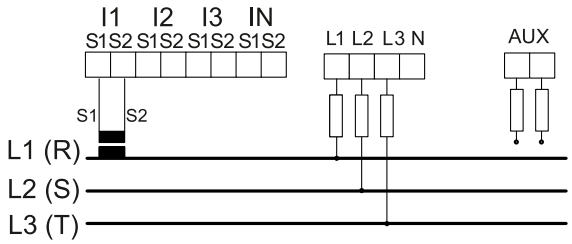

Quick product references

Energy efficiency wiring diagrams

M4M 30

- 3-phase 3-wire network with 3CTs

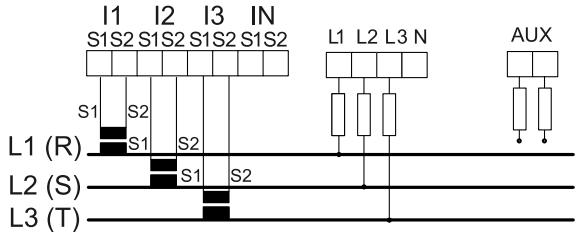

- 3-phase 3-wire network with 2CTs ok for MID on M4M 30-M

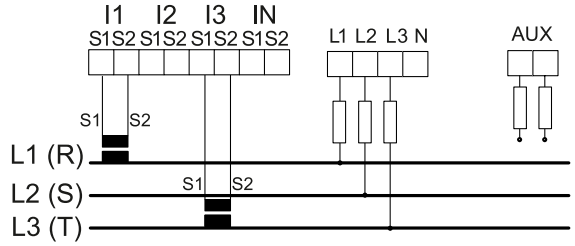

- 2-phase 3-wire network with 2CTs

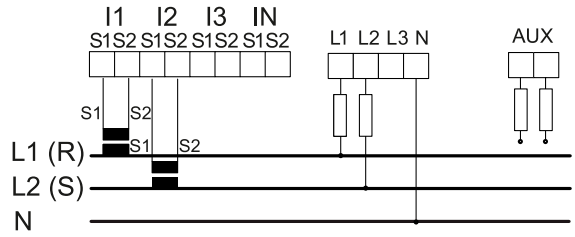

- 1-phase 2-wire network with 1CT ok for MID on M4M 30-M

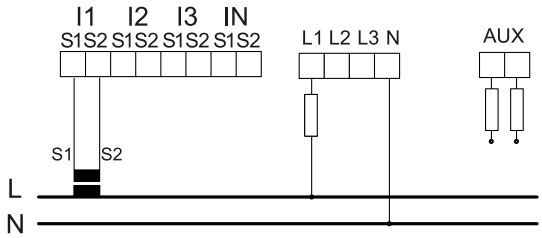

- 3-phase 3-wire 3-CTs + 3VTs

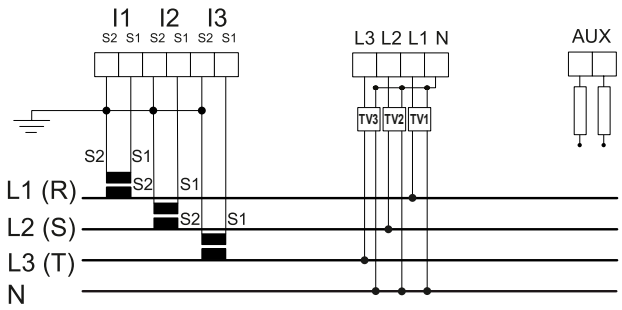

Quick product references

Energy efficiency wiring diagrams

M4M 30

- 2-phase 3-wire network with 2CT + 2VT

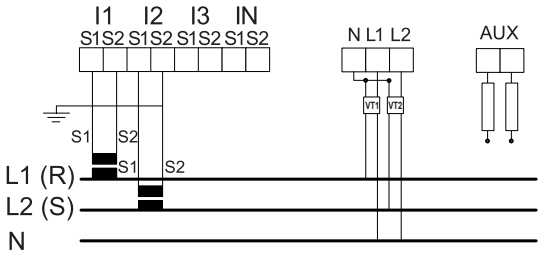

- 3-phase 4-wire network with 3CT + 3VT

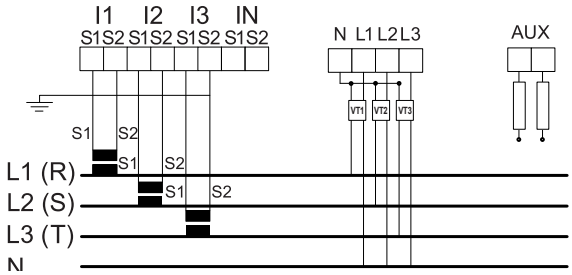

- 3-phase 4-wire network with 4CT + 3VT

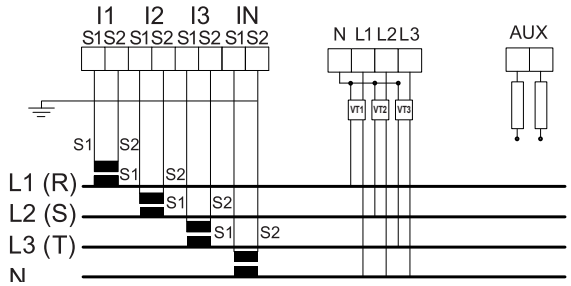

M4M 30-M (MID): In order to ensure antitampering for MID directive, only MID compliant wiring have to be selected and sealing of terminal block is mandatory.

Quick product references

Energy efficiency wiring diagrams

M4M 30

Wiring diagrams - M4M 30 Rogowski

Below the wiring diagrams for M4M 30 working with Rogowski coils are shown:

- 3-phase 4-wire network with 4RogCTs

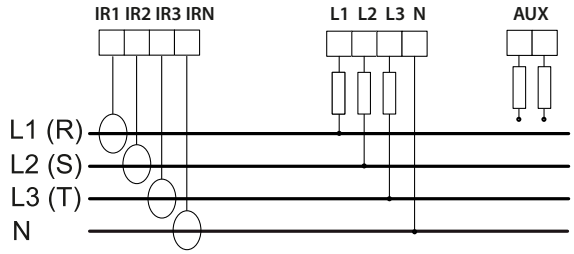

- 3-phase 4-wire network with 3RogCTs

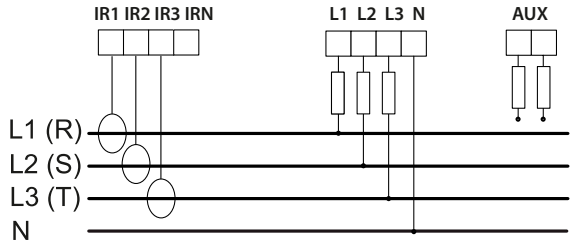

- 2-phase 3-wire network with 2RogCTs

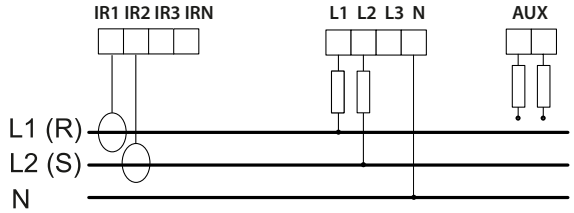

- 3-phase 3-wire network with 3RogCTs

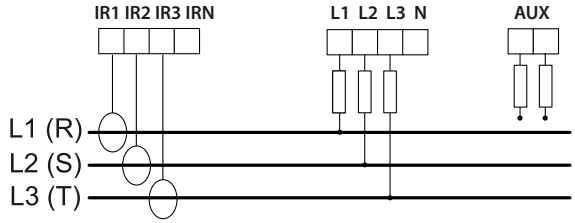

Quick product references

Energy efficiency wiring diagrams

M4M 30

- 3-phase 3-wire network with 2RogCTs

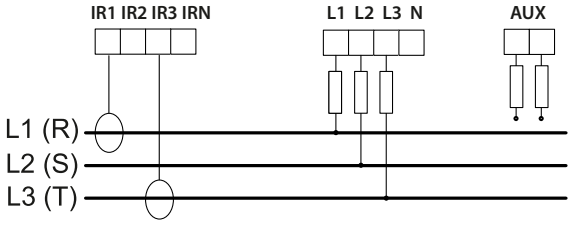

- 3-phase 4-wire network with 1RogCT

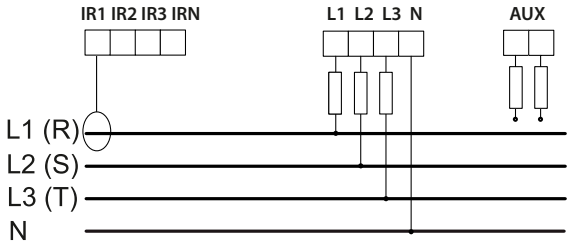

- 1-phase 2-wire network with 1RogCT

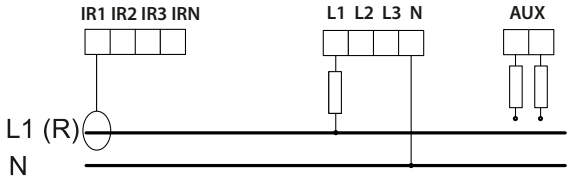

- 3-phase 3-wire network with 1RogCT

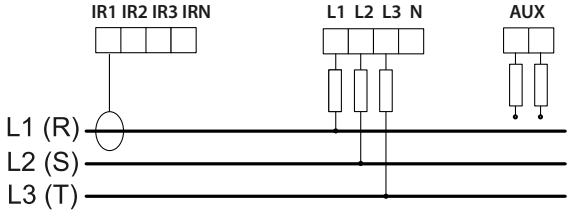

Quick product references

Energy efficiency wiring diagrams

M4M 30

Inputs and outputs connections

- Programmable I/O: Alarm output with external relays for load command. Example of wiring for I/O1 as alarm output, COM is common for all I/O:

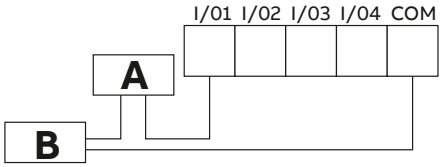

A: V aux 48 V a.c./d.c. 100mA
B: External relay

- Programmable I/O: Pulse output. Example of wiring for I/O1 as pulse output, COM is common for all I/O:

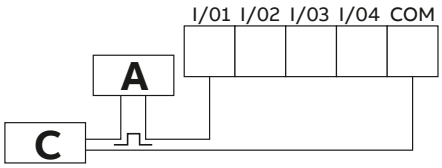

A: V aux 48 V a.c./d.c. 100mA
C: Pulse acquisition

- Programmable I/O: Tariff input. Please note that only I/O1, I/O2, I/O3 can be used as tariff inputs. Example of wiring for I/O1 as tariff input, COM is common for all I/O:

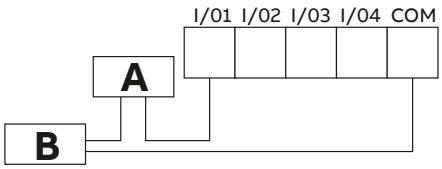

A: 24-240VDC / 57-240VAC
B: Tariff acquisition

- Programmable I/O: Pulse input for external pulse acquisition. Example of wiring for I/O1 as pulse input, COM is common for all I/O:

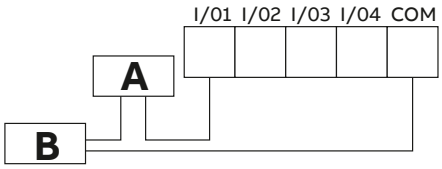

A: 24-240VDC / 57-240VAC
B: Pulse acquisition (Impulse length at least 30 mS)

Same wiring schemes apply for I/O5 and I/O6 available only on M4M 30 I/O.

- Analogue outputs, typical load 250 Ohm, max 500 Ohm (available only on M4M 30 I/O):



Quick product references

Energy efficiency wiring diagrams

D1M 15

D1M 15 can be used on different type of network. According to the type of network that has been chosen, the parameters visualized on the device HMI change. Below the wiring diagrams are shown:

- **3-phase 4-wire network with 3CTs (3N3T)**

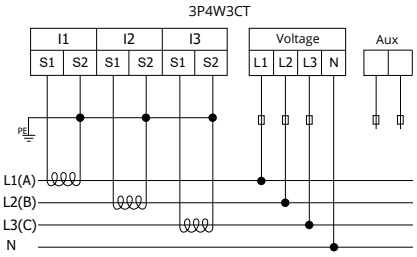

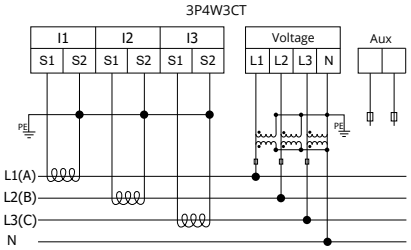

- **3-phase 4-wire network with 1CT (3 1T)**

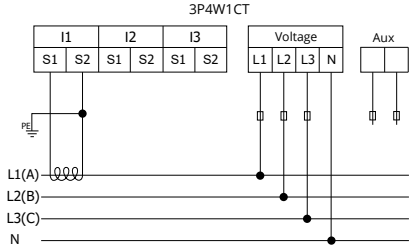

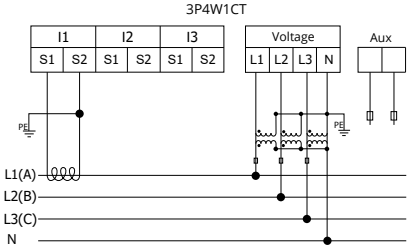

- **3-phase 3-wire network with 3CTs (3 3T)**

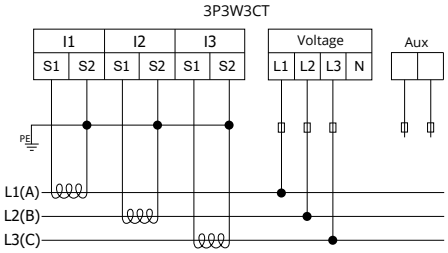

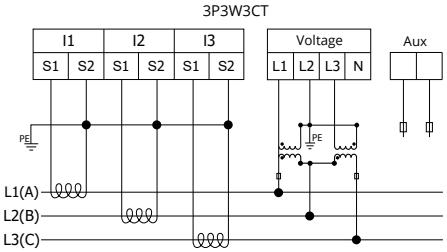

- **3-phase 3-wire network with 2CTs (3 2T)**

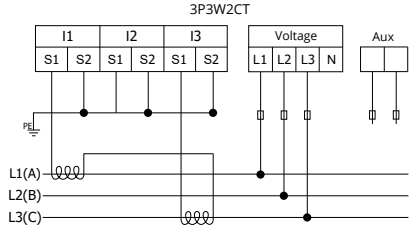

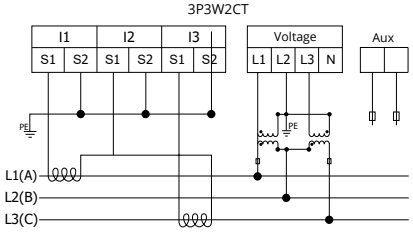

Quick product references

Energy efficiency wiring diagrams

D1M 15

- **3-phase 3-wire network with 1CT (3 1T)**

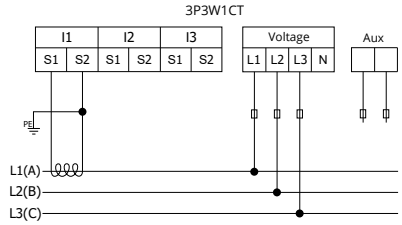

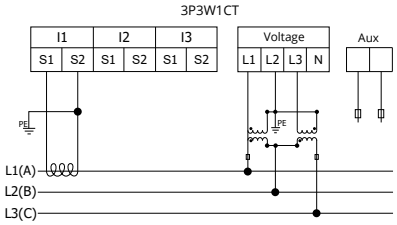

- **2-phase 3-wire network with 2CTs (2N2T)**

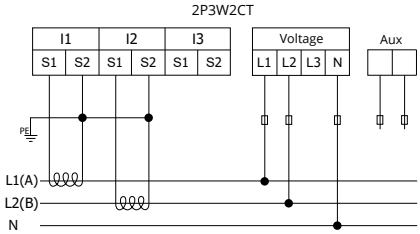

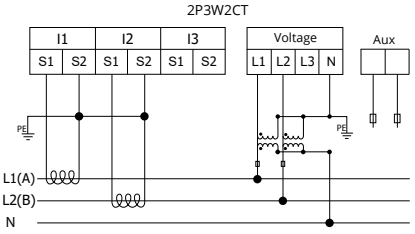

- **1-phase 2-wire network with 1CT (1N1T)**

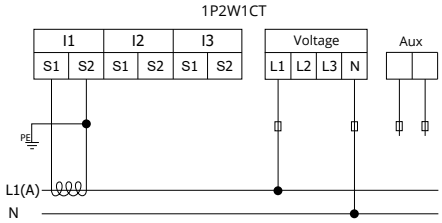

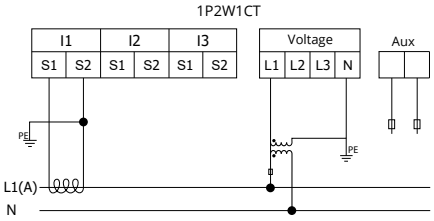

- **Digital outputs**



Quick product references

Energy efficiency wiring diagrams

D1M 20

D1M 20 can be used on different type of network. According to the type of network that has been chosen, the parameters visualized on the device HMI change. Below the wiring diagrams are shown:

- **3-phase 4-wire network with 3CTs (3N3T)**

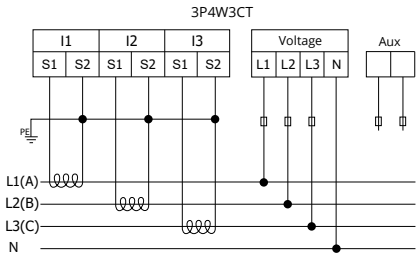

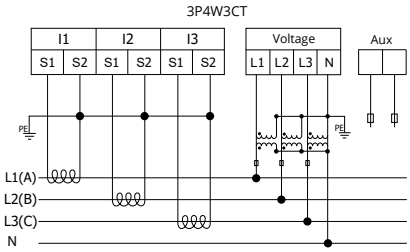

- **3-phase 4-wire network with 1CT (3N1T)**

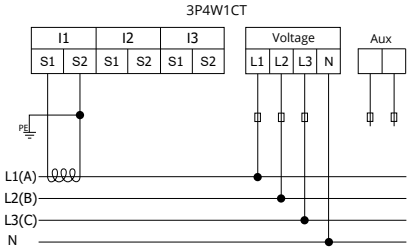

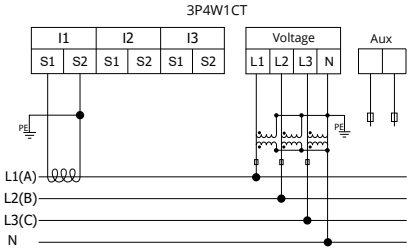

- **3-phase 3-wire network with 3CTs (3 3T)**

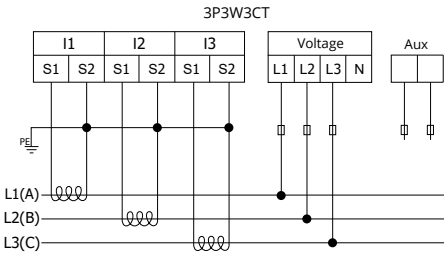

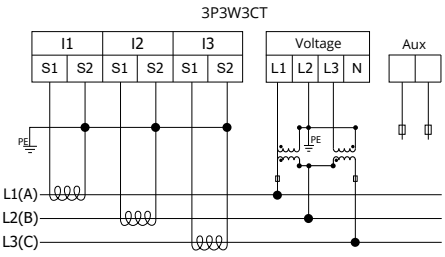

- **3-phase 3-wire network with 2CTs (3 2T)**

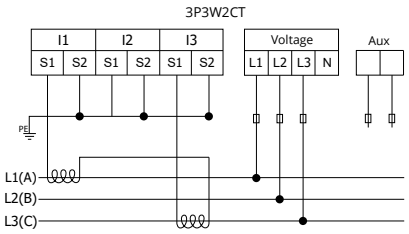

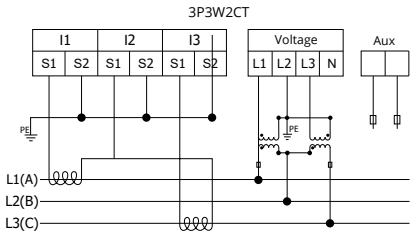

Quick product references

Energy efficiency wiring diagrams

D1M 20

- **3-phase 3-wire network with 1CT (3 1T)**

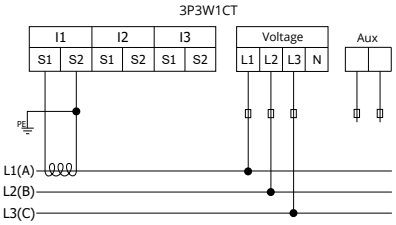

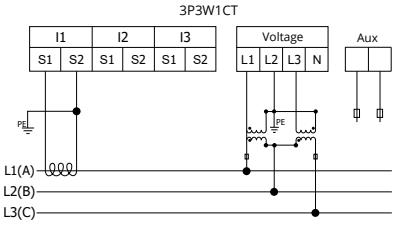

- **2-phase 3-wire network with 2CTs (2N2T)**

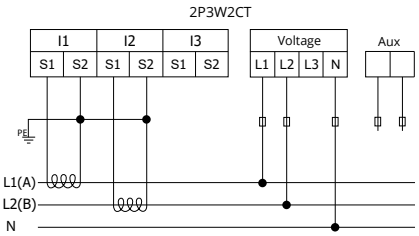

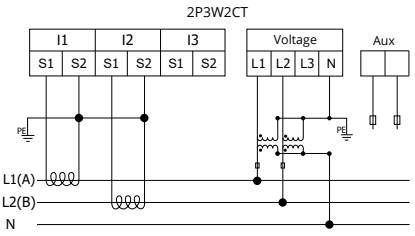

- **1-phase 2-wire network with 1CT (1N1T)**

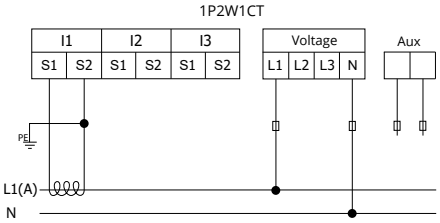

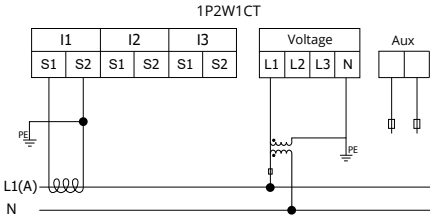

- **Digital outputs and digital inputs**

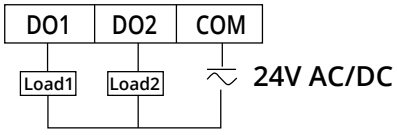

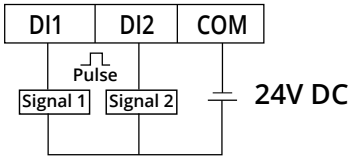

Quick product references

Energy efficiency wiring diagrams

DMTME

Three-phase with neutral and 3 CTs

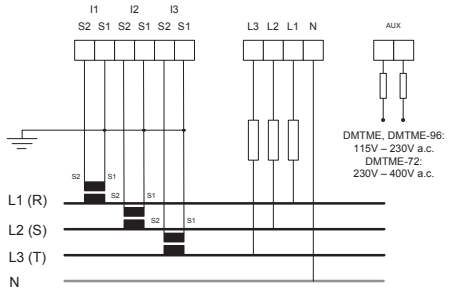

Three-phase with 3 CTs

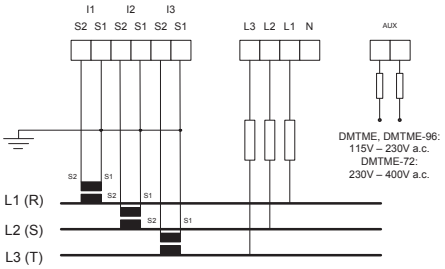

Three-phase with neutral and 3 CTs and 3 VTs

Up to 500 V phase-neutral a direct connection is possible

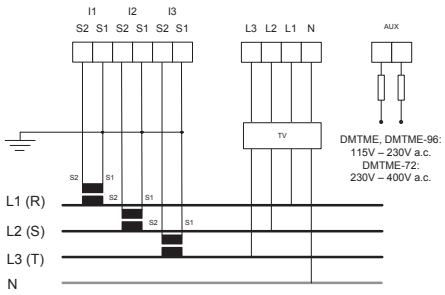

Aron type three-phase with 2 CTs and 2 VTs

With symmetric and unbalanced network, 3 CTs and up to 800 V, beyond this value must use VT.

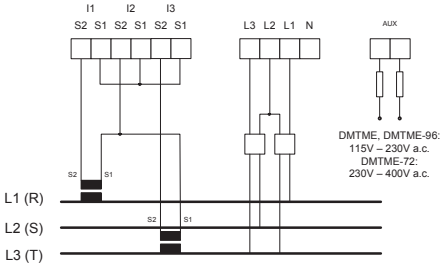

Digital output used as alarm with external relays for load command



Single phase with neutral and 1 CTs

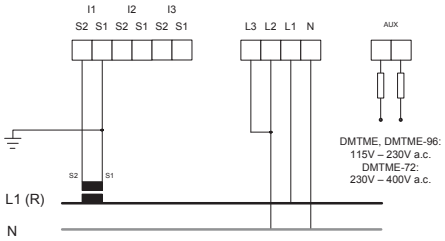

Digital output used as pulses



Quick product references

Energy efficiency wiring diagrams

A series A44

3 wire connection, 2 elements

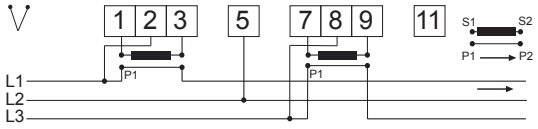

4 wire connection, 3 elements

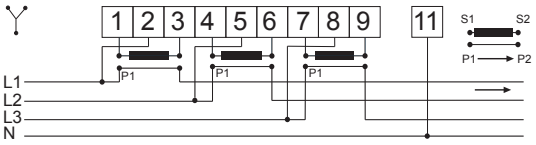

B series B21



B series B23

3 wire connection, 2 elements

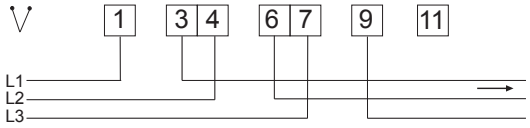

4 wire connection, 3 elements

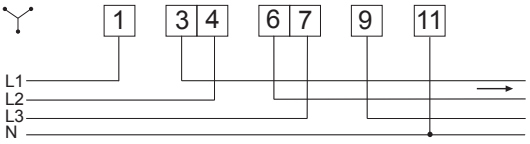

B series B24

3 wire connection, 2 elements

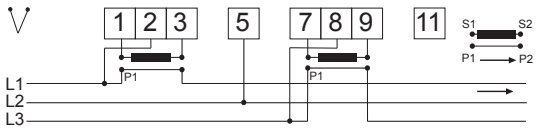

4 wire connection, 3 elements

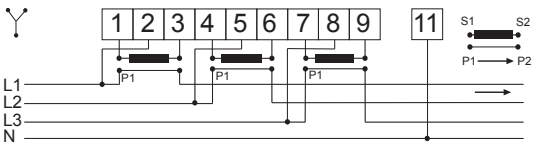

C series C11



C series C13

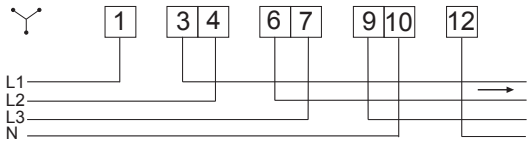

Quick product references

Energy efficiency wiring diagrams

Digital instruments

VLMD-1-2 and VLMD-1-2-R
VLMD P and VLMD-R P

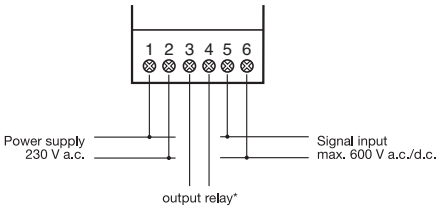

FRZ-DIG

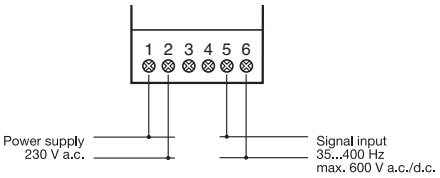

AMTD-1 and AMTD-1-R
AMTD-1 P and AMTD-1-R P

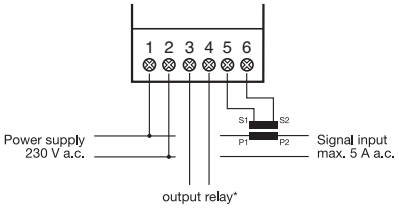

AMTD-2 and AMTD-2-R
AMTD-2 P and AMTD-2-R P

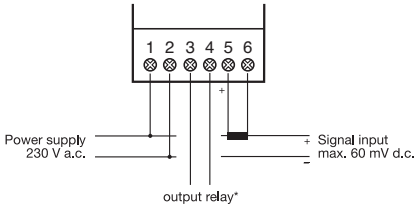

*Only for instruments with output relay

Analogue instruments

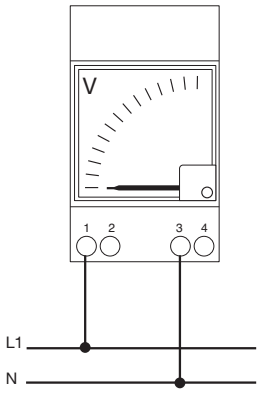

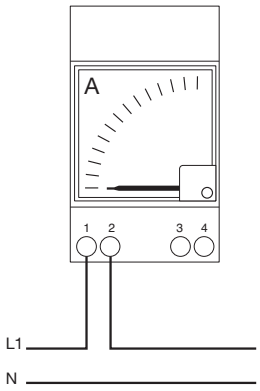

Direct insertion

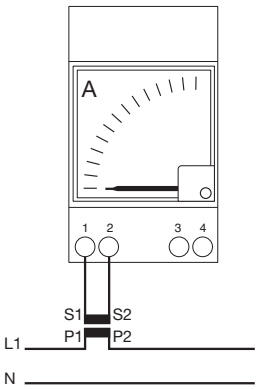

Indirect insertion using C.T.

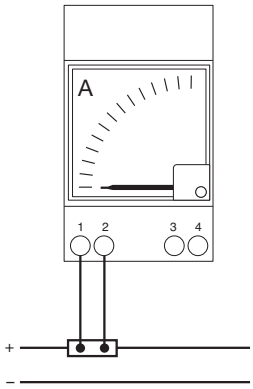

Indirect insertion using shunt

Quick product references

Energy efficiency wiring diagrams

Front panel analogue instruments

Voltmeter for alternating current

Direct insertion



Insertion via VT



Voltmeter for direct current

Direct insertion



Ammeter for alternating current

Direct insertion



Insertion via CT



Ammeter for direct current

Direct insertion



Insertion with Shunt



MCV, MCA, QCV and QCA

MCV4

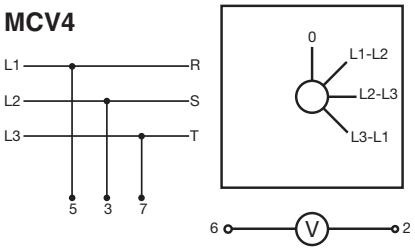

MCA4

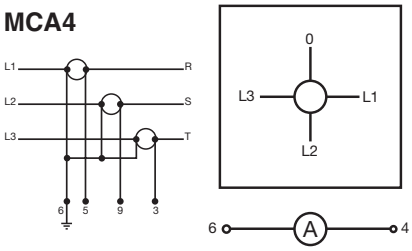

MCV7

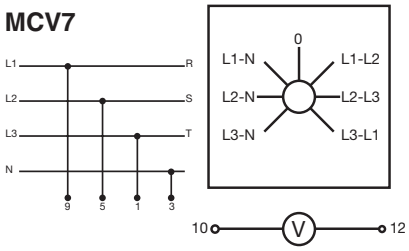

QCV-4

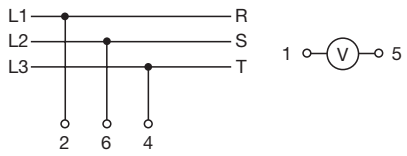

QCA-4

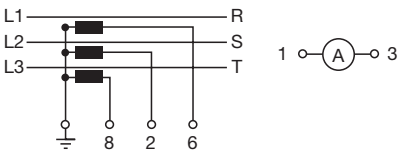

QCV-7

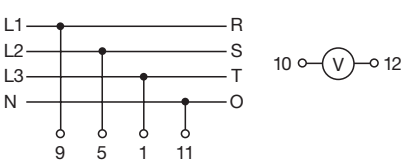

Quick product references

Energy efficiency wiring diagrams

E 233

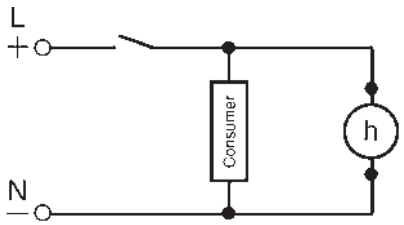

elapsed-time meter

E 233-15/48 DC

HMT

HMT 1



HMT 11



SNT

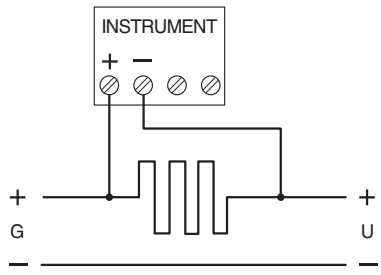

Notes

Quick product references

Overall dimensions

Modular products	 Width		Depth		 Max. dimensions	
	modules	mm	DIN-rail to door	DIN-rail to front	max depth	max heigth
Miniature circuit breakers						
S 301	1	17.5	44	-	69	88
S 301 Na	2	35				
S 302	2	35				
S 303	3	52.5				
S 303 Na	4	70				
S 304	4	70				
S 300 with bottom aux. cont.	See drawings					
S 201 U	1	17.5	44	-	71	92
S 202 U	2	35				
S 203 U	3	52.5				
S 204 U	4	70				
S 201 UDC	1	17.5	44	-	71	92
S 202 UDC	2	35				
S 203 UDC	3	52.5				
S 204 UDC	4	70				
SU 201 M	1	17.5	49.5	-	69	111
SU 202 M	2	35				
SU 203 M	3	52.5				
SU 204 M	4	70				
SN 201	1	17.6	43.5	58	68.9	91.8
S 201 80-100A	1	17.5	44	58	69	88.8
S 202 80-100A	2	35				
S 203 80-100A	3	52.5				
S 204 80-100A	4	70				
S750DR	See drawings					
S 801	1.5	27	52	82.5	88.5	95
S 802	3	54				
S 803	4.5	81				
S 804	6	108				
S 801_-R	1.5	27	52	82.5	88.5	142
S 802_-R	3	54				
S 803_-R	4.5	81				
S 804_-R	6	108				

Quick product references

Overall dimensions

Modular products	Width		Depth		Max. dimensions	
	modules	mm	DIN-rail to door	DIN-rail to front	max depth	max heigth
Residual current devices						
F 202	2	35	44	-	69	88
F 204	4	70				
F 202 B	2	35	44	-	69	85
F 204 B	4	70				
F 204 B high ratings	4	72	44	60	69.5	85
F 204 125 A	2	72	44	60	69.5	-
DDA 200	See drawings					
DS 202 up to 40 A	4	70	44	-	69	93
DS 203 up to 40 A	5	87.5				
DS 204 up to 40 A	6	105				
DS 202 50, 63 A	4	70	44	-	69	93
DS 203 50, 63 A	7	122.5				
DS 204 50, 63 A	8	140				
DS201	2	35	44	58	69	85
DS202CR	2	36	44	59.2	69.4	98
DS301C	1	17.6	50.3	67	74	85
DS203NC	4	70.4	-	-	69	85
DSE201 - DSE201M	1	17.5	-	-	69	100 - 115
DDA 800	See drawings					
RD2	2	35	44	58	-	85
RD3	3.5	58.2	44.2	57.9	57.9	85
ELR	See drawings					
Toroidal transformers	See drawings					
AFDD						
S-ARC1	2	35	-	-	69	85
Auxiliary elements and accessories						
S 2C-A_	1	17.5	44	-	69	85
S 2C-H11L	0.5	8.8				
S 2C-H20L						
S 2C-H02L						
S 2C-S/H 6R						
S 2C-H 6R						
S 2C-UA_	1	17.4	44	-	74	85
F 2C-A_						
S 2C-OVP						
F 2C 125A-SH/S2C-Nt	0.5	8.8	44	-	70	88
Bottom fixing aux. cont.	See drawings					
S 2C-EST	See drawings					
S 2C-BP	1	17.5	44	-	68	85

Quick product references

Overall dimensions

Modular products	Width		Depth		Max. dimensions	
	modules	mm	DIN-rail to door	DIN-rail to front	max depth	max heigth
S 2C-CM	See drawings					
F 2C-ARI	See drawings					
F 2C-CM	See drawings					
F 2C-ARH	See drawings					
F 2C-ARH-T	See drawings					
Aux. elements for SN201	See drawings					
Aux. elements for S280 and S290	0.5	8.75	44	-	73	90
	1	17.5				
S800-AUX	See drawings					
S800-RSU-H	See drawings					
S800-RD+S800-RHE	See drawings					
Terminal covers	See drawings					
Enclosures	See drawings					
Flush frame	See drawings					
Busbars	See drawings					
Me flange	See drawings					
OH_2A_	See drawings					
Protection and safety						
OVR T1-T2 25kA (255V) SPD 1 pole/(TS)	2	36	52	58	76,7	108.1/(109.2)
OVR T1-T2 25kA (440V) (RES) SPD 1 pole/(TS)	2	36				
OVR T1-T2 25kA (255V) SPD 2 pole/(TS)	4	72				
OVR T1-T2 25kA (440V) (RES) SPD 2 pole	4	72				
Type 1+2 12.5kA (440V) SPD 1 pole /(TS)	2	36				
OVR T1-T2 25kA (255V) SPD 3 pole/(TS)	6	108				
OVR T1-T2 25kA (440V) (RES) SPD 3 pole	6	108				
Type 1+2 12.5kA (440V) SPD 2 poles /(TS)	4	72				
OVR T1-T2 25kA (255V) SPD 4 pole/(TS)	8	144				
OVR T1-T2 25kA (440V) (RES) SPD 4 pole	8	144				
Type 1+2 12.5kA (440V) SPD 3 poles /(TS)	6	108				
Type 1+2 12.5kA-440V SPD 4 poles	8	144				
Type 1+2 12.5kA 275V, Type 2 (RES) or Type 2+3 SPD 1 poles /(TS)	1	17.8	43,5	69,4	76,7	88/(95)
Type 1+2 12.5kA 275V, Type 2 (RES) or Type 2+3 SPD 2 poles	2	36				
Type 1+2 12.5kA 275V, Type 2 (RES) or Type 2+3 3 poles /(TS)	3	54				
Type 1+2 12.5kA 275V, Type 2 (RES) or Type 2+3 4 poles /(TS)	4	71.2				
E90 20/32 and PV (1000 VDC) 1 pole	1	17.5	-	-	64	85
E90 20/32 1 pole + N	2	35				
E90 20/32 and PV (1000 VDC) 2 poles	2	35				
E90 20/32 3 poles	3	52.5				
E90 20/32 3 poles + N	4	70				
E90 20/32 4 poles	4	70				

Quick product references

Overall dimensions

	 Width		Depth		 Max. dimensions	
Modular products	**modules**	**mm**	**DIN-rail to door**	**DIN-rail to front**	**max depth**	**max heigth**
E90/32 PV 1500	See drawings					
E90 50 1 pole						
E90 50 1 pole + N						
E90 50 2 poles						
E90 50 3 poles						
E90 50 3 poles + N						
E90 125 1 pole	See drawings					
E90 125 1 pole + N						
E90 125 2 poles						
E90 125 3 poles						
E90 125 3 poles + N						
E90 30 Class J 1 pole	See drawings					
E90 30 Class J 2 poles						
E90 30 Class J 3 poles						
E90 60 Class J 1 pole	See drawings					
E90 60 Class J 2 poles						
E90 60 Class J 3 poles						
ILTS-E 1 pole	1.5	27	44	70	70	90
ILTS-E 2 poles	3	54				
ILTS-E 3 poles	4.5	81				
ILTS-E 4 poles	6	108				
SQZ3	3	52.5	44	58	58	85
E 236 US1	2	35	44	60	65	87
E 236 US2						
E 236 US1.1	1	17.5	44	60	60	87
E 236 US2.1						
E 236 US1.1D						
Isoltester-DIG	6	105	44	56	61	90
Selvtester-24	3	52.5	44	58	58	85.5
QSD	See drawings					
TI	See drawings					
QSO	See drawings					
ISL-A 115	6	105	44	58	65	90
ISL-A 230						
ISL-A 600						
ISL-C 600						
ISL-A 24-28	3	52.5	44	58	65	85.5
ISL-C 230						
ISL-C 440						
ISL-MOT 1000						

Quick product references

Overall dimensions

Modular products	Width		Depth		 Max. dimensions	
	modules	mm	DIN-rail to door	DIN-rail to front	max depth	max heigth
Command and signaling						
E201	1	17.5	44	58	70	85
E202	2	35				
E203	3	52.5				
E204	4	70				
SD201	1	17.5	44	58	69	85
SD202	2	35				
SD203	3	52.5				
SD204	4	70				
SHD201	1	17.5	44	58	69	88
SHD202	2	35				
SHD203	3	52.5				
SHD204	4	70				
E463	2.5	44	44	58	70	85
E210	0.5	9	43.5	58	67.9	85
E210	1	18				
ESB20	1	17.5	44	58	58	85
ESB24	2	35				
ESB40	3	54				
ESB63						
EN20	1	17.5	44	58	58	85
EN24	2	35				
EN40	3	54				
EN63						
E290	See drawings					

Quick product references

Overall dimensions

Modular products	Width		Depth		 Max. dimensions	
	modules	mm	DIN-rail to door	DIN-rail to front	max depth	max heigth
E 234 1 concact	1	17.5	43.4	58	58	70
E 234 2 contacts						80
TS 25 C	4	70	44	58	58	85
TS 40 C	4	70				
TS 63 C	5	87.5				
TM10	2	35	44	58	58	85
TM15						
TS8...16						
TM30	3	52.5				
TM40						
TS24						
SM	1	17.5	44	58	58	85
RM						
TSM	2	35				
TSR						
CP-D 15/0.83	1	18	44	58	58	91
CP-D 24/0.42						
CP-D 24/2.5	4	71				
CP-D 15/2.1	3	53				
CP-D 24/1.3						
CP-D 24/4.2	5	89.9				
TM-_	See drawings					
M117_	2.5	44	44	60	60	85
M1011	3	53				
M1363						
MA1-8001	See drawings					

Quick product references

Overall dimensions

Modular products	 Width		Depth		 Max. dimensions	
	modules	mm	DIN-rail to door	DIN-rail to front	max depth	max heigth
Control and automation						
AT1e	1	17.8	44	60	60	88.5
AT1e-R						
AT2, AT2e	2	35				
AT2-R, AT2e-R						
AT2-7R, AT2e-7R						
AT72e	See drawings					
D Line	2	35	43.8	60	60	90
E 232-230	1	17.5	44	59	59	88
E 232 E					58	90
TWA-1	2	35.8	43.8	60	60	85
TWA-2						
T1, T1 PLUS	1	17.5	-	-	65	86
E 450	1	17.5	-	60	60	85
LSS1/2	5	87.5	-	58	58	85

Quick product references

Overall dimensions

Modular products	 Width		Depth		 Max. dimensions	
	modules	mm	DIN-rail to door	DIN-rail to front	max depth	max heigth
Energy efficiency						
Modular analogue measurement instruments	3	52.5	44	58	58	85
Modular digital measurement instruments	3	52.2	44	58	58	85
MCV, MCA	See drawings					
QCV, QCA	See drawings					
DMTME	6	105	44	58	58	90
CUS	6	105	44	58	58	90
CUS 485	3	52.5				
TRF M	3	52.5	44	58	58	85.5
TV2	See drawings					
Shunts	See drawings					
E 233	1	17.5	44	58	58	85
HMT	2	35	44	58	58	85
A41	4	70	44	65	65	97
A42						
A43	7	123				
A44						
B21	2	35				
B23	4	70				
B24						
C11	1	17.5				111
C13	3	54				122

Quick product references

Overall dimensions







Product without modular profile	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H
Front panel devices								
SL - 48	48	48	44	7	48	45	45	R3
SL - 72	144	72	-	9	55	67	137	R3
Analogue measurement intruments - 48	48	48	43	6	53	45÷0.1	45÷0.1	R3
Analogue measurement intruments - 72	72	72	67	6	53	68÷0.7	68÷0.7	R3
Analogue measurement intruments - 96	96	96	90	6	53	92÷0.8	92÷0.8	R3
Digital measurement instruments	36	72	32	6	51.5	68÷0.8	33÷0.8	R3
M2M	96	96	90	16	61	92	92	R3
ANR 96	96	96	90	14	115	92	92	R3
TMD	96	96	90	14	115	92	92	R3
DMTME - 96	96	96	90	13	90	92	92	R3
DMTME - 72	72	72	-	10	90	68	68	R3

Quick product references

Overall dimensions







Product without modular profile	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	L [mm]
Measurement current transformers										
CT MAX	see drawings									
CT PRO XT	see drawings									
CTA	see drawings									
CT6	105	121	100	18.5	75	61	21	82	3.7	76.7
CT8	125	142	120	18.5	50	61.5	21	82	3.7	76.7
CT8-V	109	141	119	18.5	50	41	21	-	-	-
CT12 up to 4000 A	180	196	175	18.5	50	68.5	21	156.8	3.7	84
CT12 5000 A, CT12 6000 A	272	290	265	25	50	-	-	-	-	50
CT12-V	109	186	165	18.5	50	41	21	-	-	-
CTO	see drawings									

Quick product references

Overall dimensions

S 200/S 300 with bottom-fitting auxiliary contact

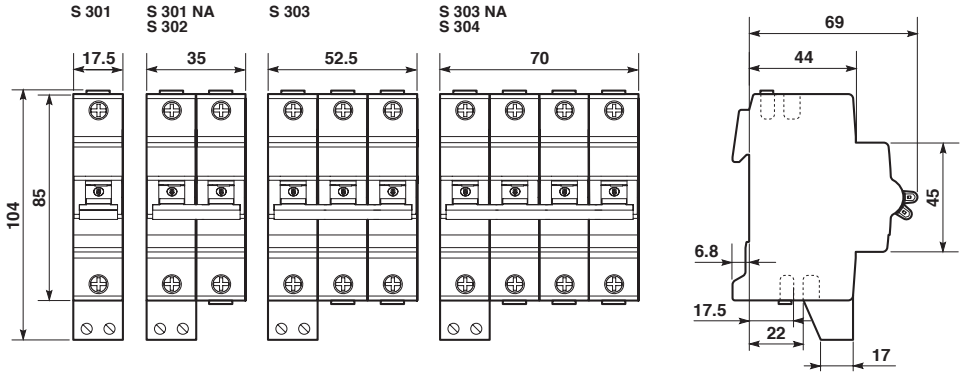

S 750 DR 16...63A

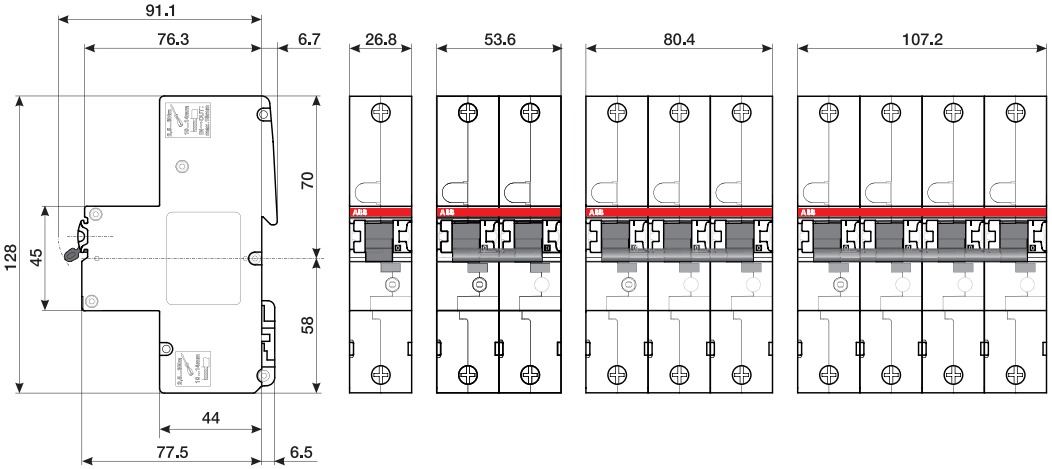

S 750 DR 80...100A

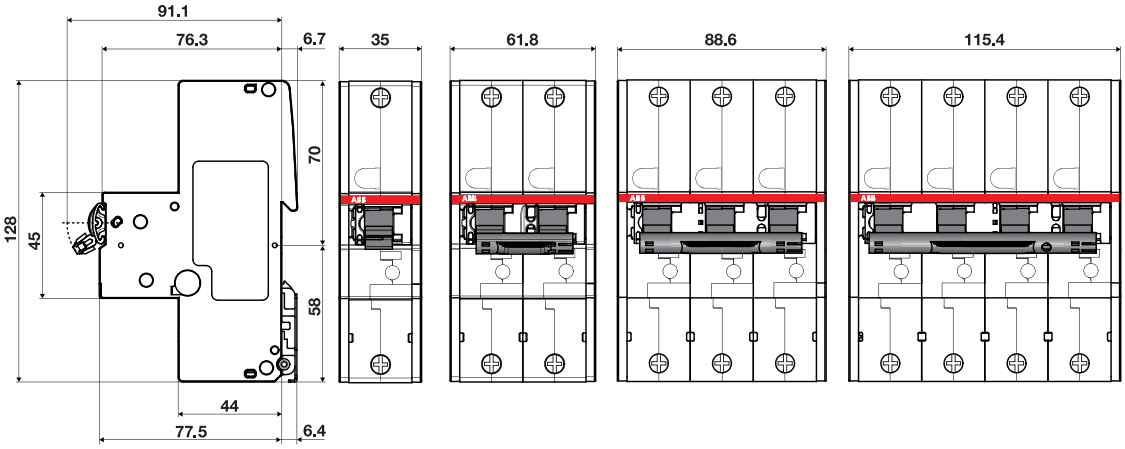

Quick product references

Overall dimensions

S800S, S800N, S800C, S800B, S800U, S800PV-SP, S800PV-SD

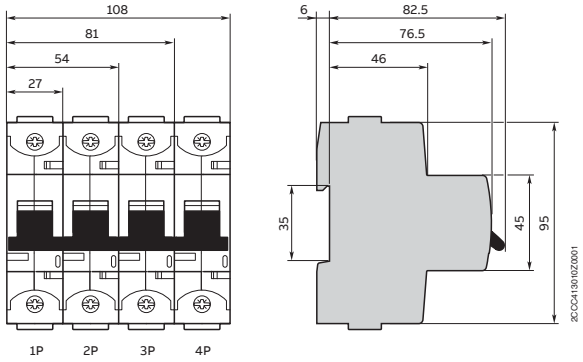

S800 with Ringlug terminals

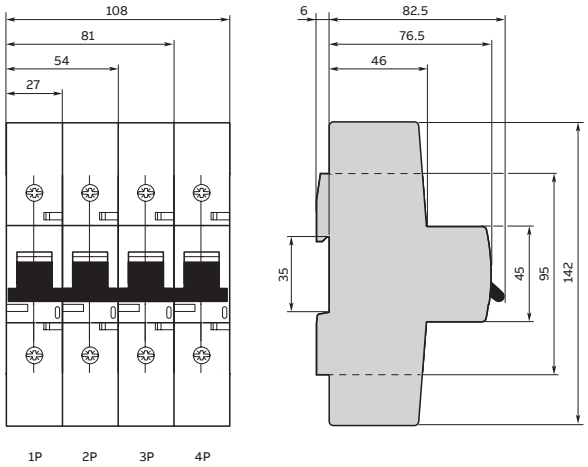

S800 mounting distances

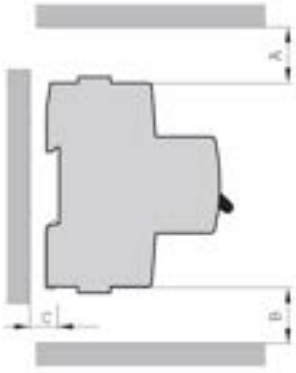

S800S, S800N, S800C

up to 254/440 VAC or 500 VDC

S800S-UC

up to 1000 VDC

S800S-SCL-SR

up to 400/690 VAC

Dimensions	isolated parts/surfaces	not isolated parts/surfaces
A	25 / 1 in	100 / 4 in
B	25 / 1 in	25 / 1 in
C	7 / 0.3 in	50 / 2 in

S800S, S800N, S800C, S800HV

from 254/440 VAC up to 400/690 VAC or 588/1000 VAC (S800HV)

S800B

up to 230/400 VAC or 300 VDC

S800PV-SP

up to 1500 VDC

Dimensions	isolated parts/surfaces	not isolated parts/surfaces
A	25 / 1 in	50 / 2 in
B	25 / 1 in	25 / 1 in
C	7 / 0.3 in	50 / 2 in

S800HV-SCL-SR

up to 580/1000 Vac

Dimensions	isolated parts/surfaces	not isolated parts/surfaces
A	25 / 1 in	150 / 6 in
B	25 / 1 in	25 / 1 in
C	7 / 0.3 in	50 / 2 in

S800U

up to 240/415 Vac

Dimensions	isolated parts/surfaces	not isolated parts/surfaces
A	25 / 1 in	100 / 4 in
B	25 / 1 in	100 / 4 in
C	7 / 0.3 in	50 / 2 in

Quick product references

Overall dimensions

SN201

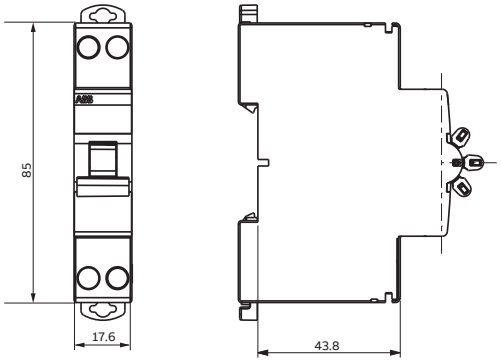

S2011C and S202C

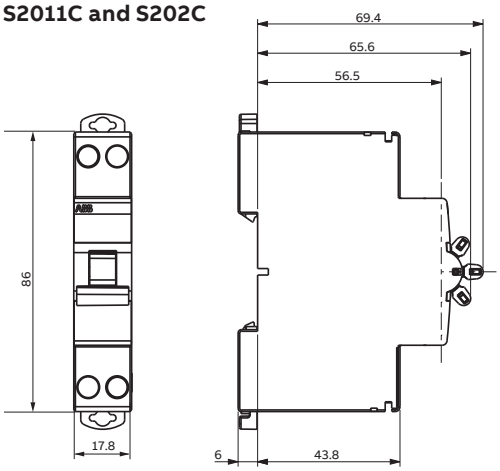

S203C and S204C

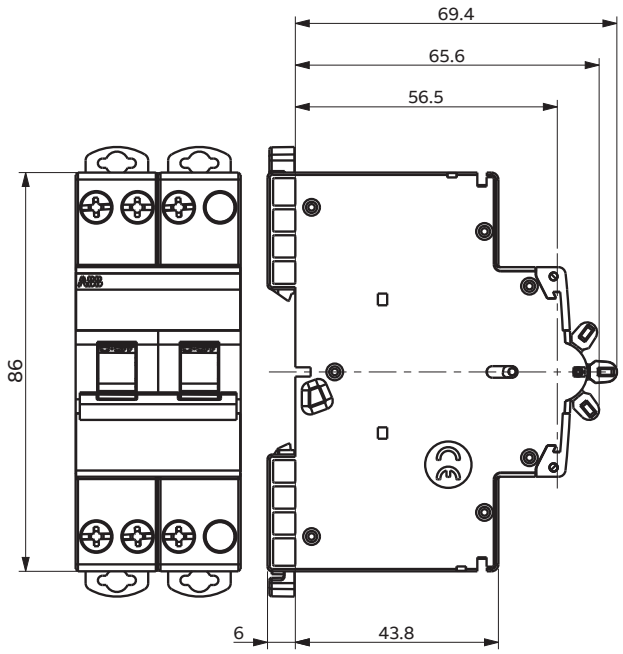

Quick product references

Overall dimensions

S200C Compact MCBs and DS202CR RCBOs - Auxiliary contact

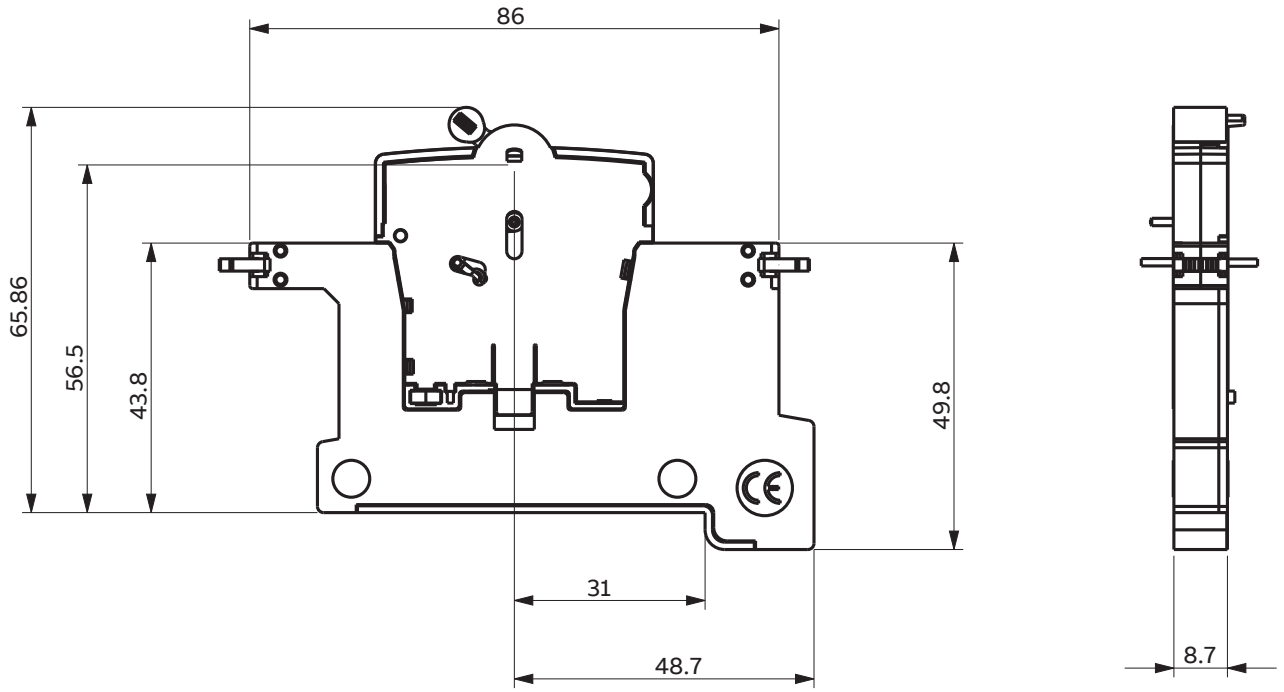

Quick product references

Overall dimensions

DDA 200

In=25-40 A

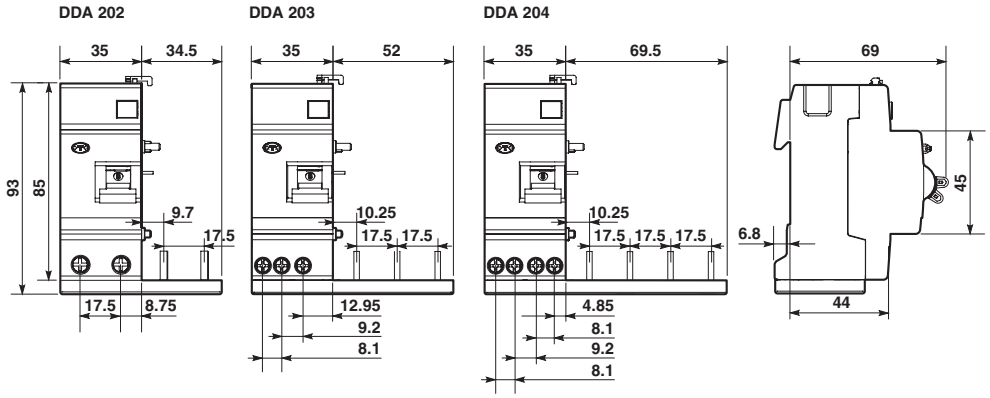

In=63 A

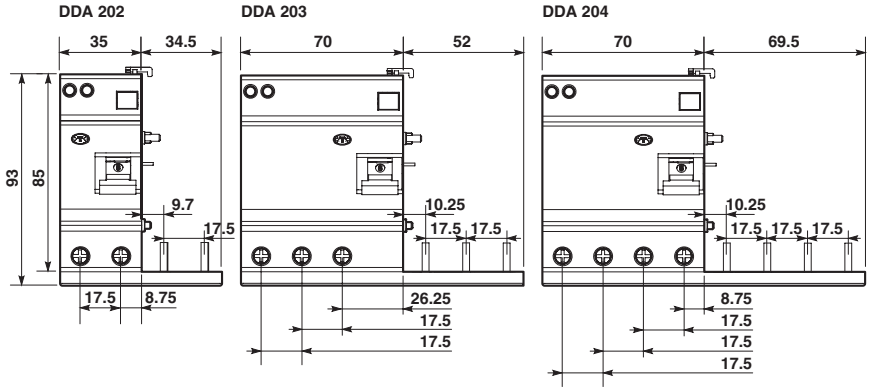

DDA 200 B

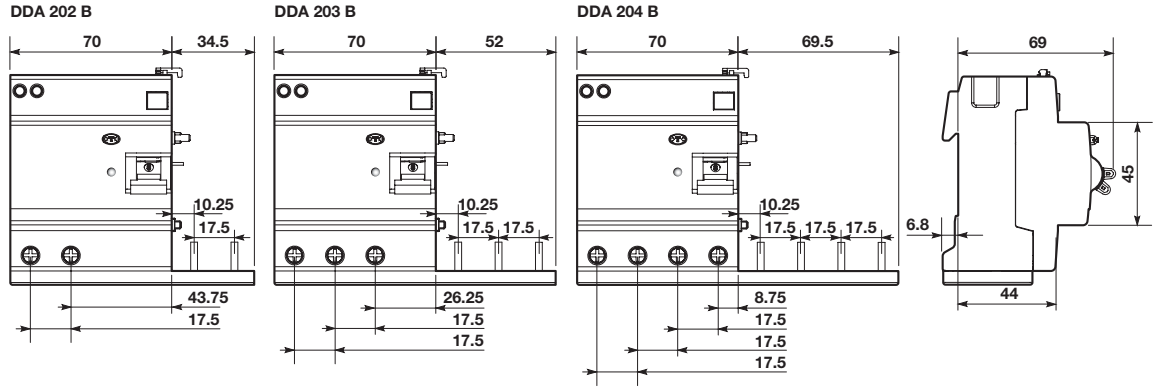

Quick product references

Overall dimensions

DS203NC

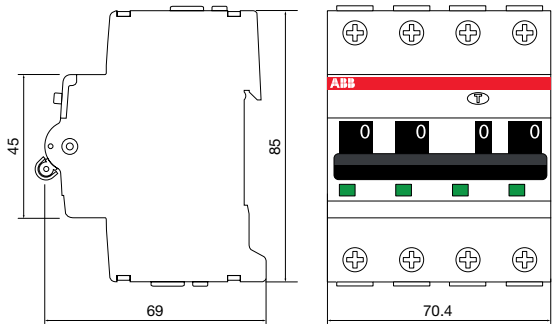

DS201

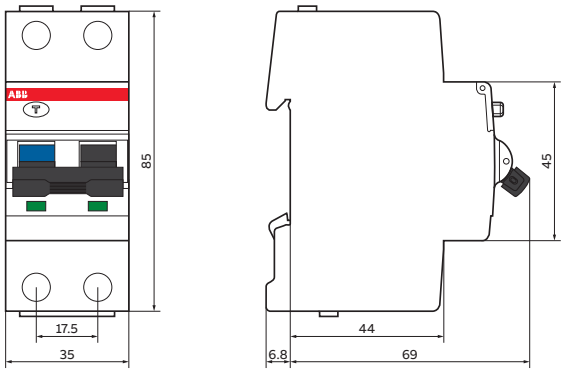

DS301C

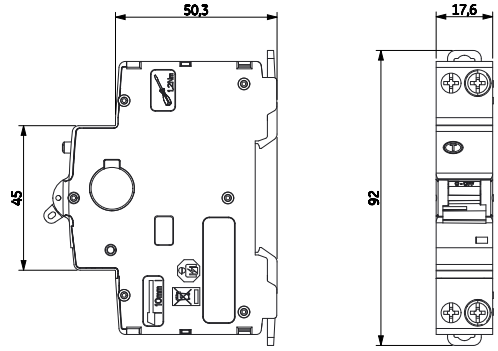

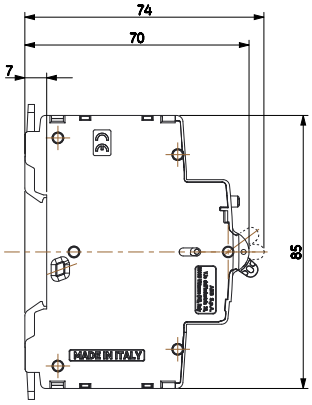

S-ARC1

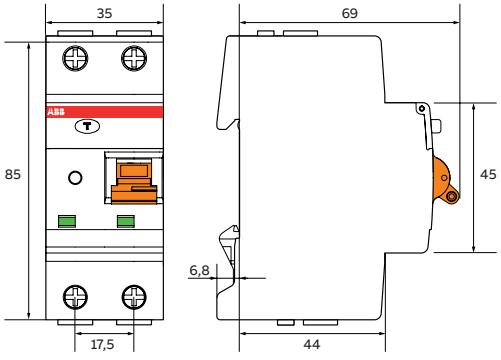

S-ARC1

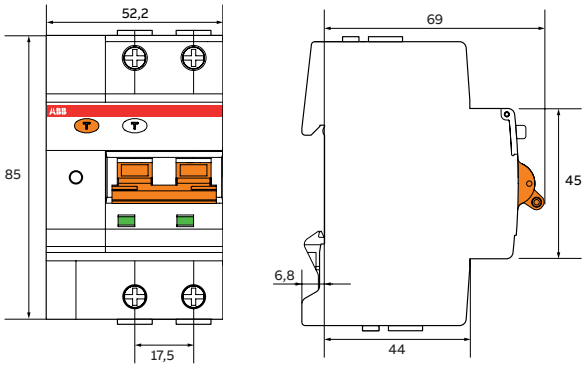

DS202CR

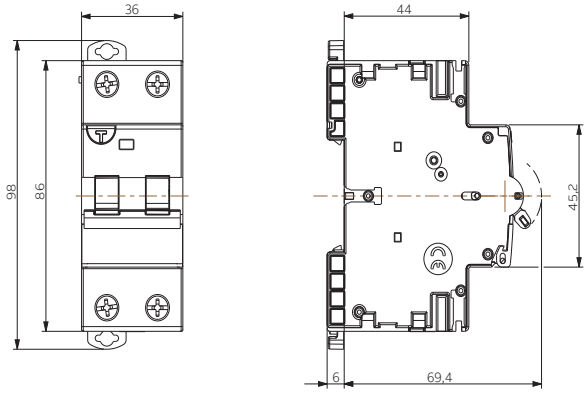

Dimensions in mm

Quick product references

Overall dimensions

DSE201

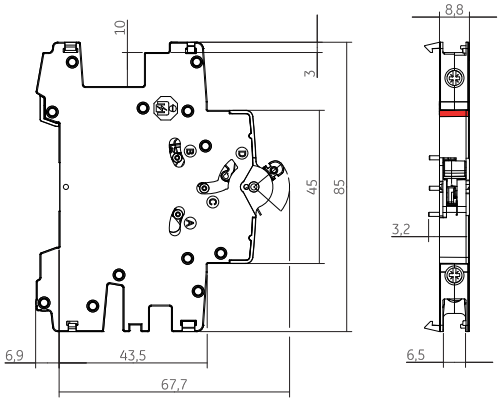

DSE201 M

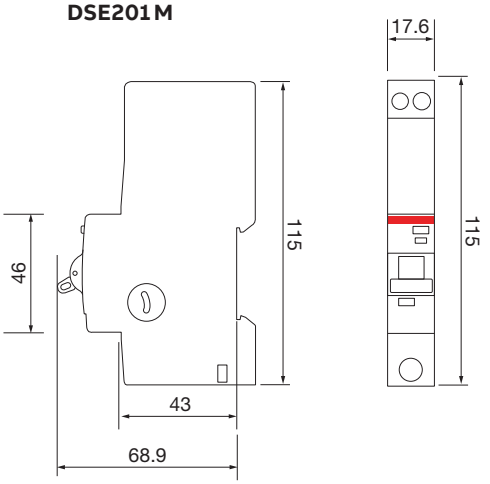

DDA 800 for S800 and DS800 series

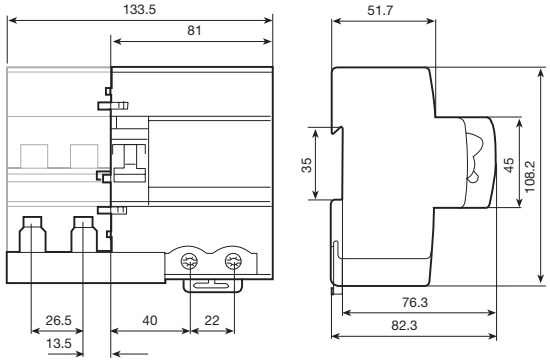

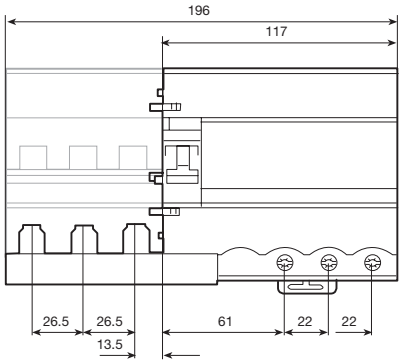

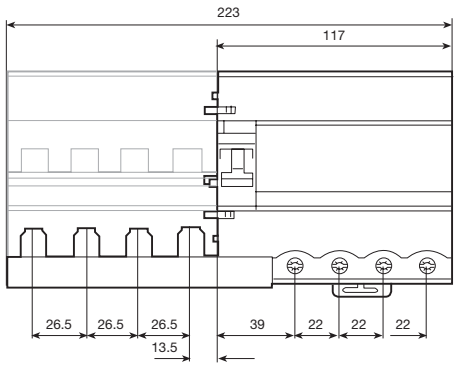

DSE203 M

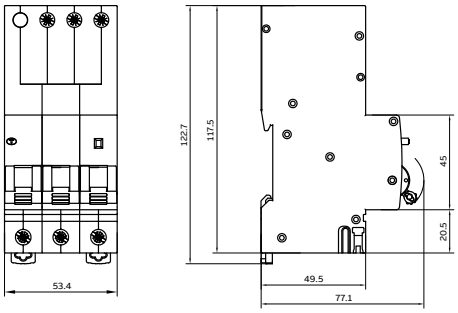

DSE203N M

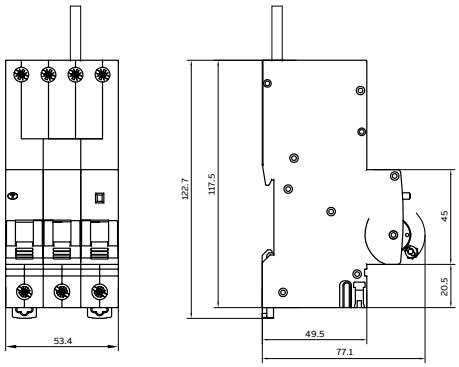

DSE203NS M

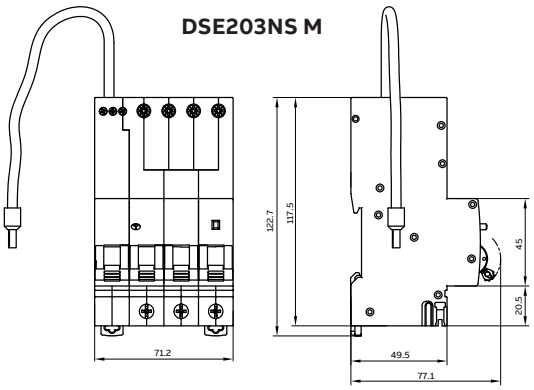

Dimensions in mm

Quick product references

Overall dimensions

DSN201E / DSE201 NS

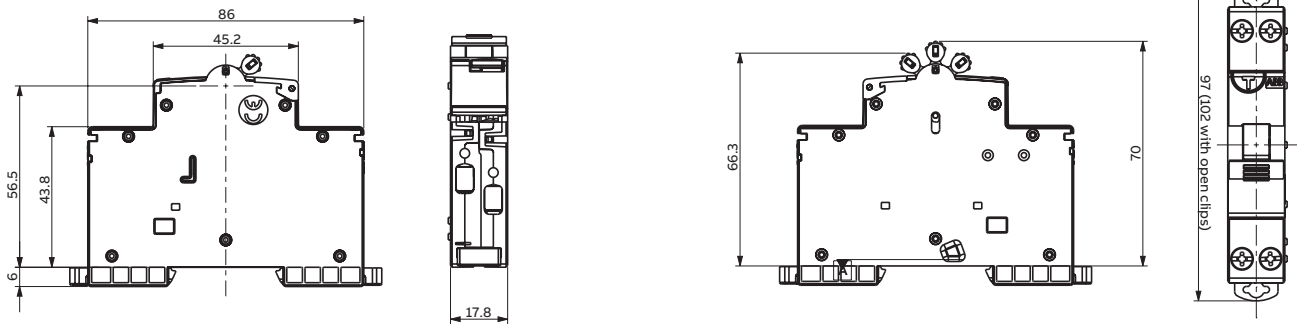

ELR front panel residual current relays

ELR48P

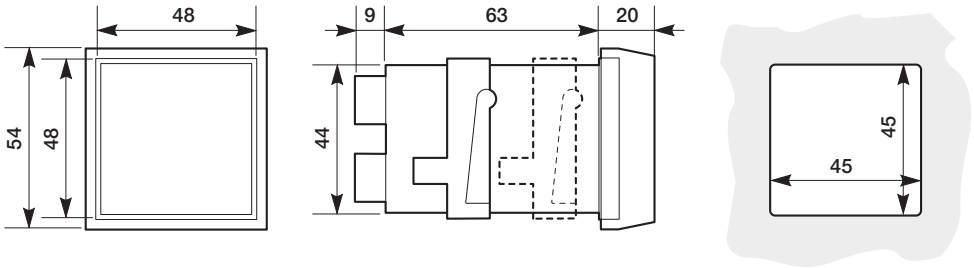

ELR72

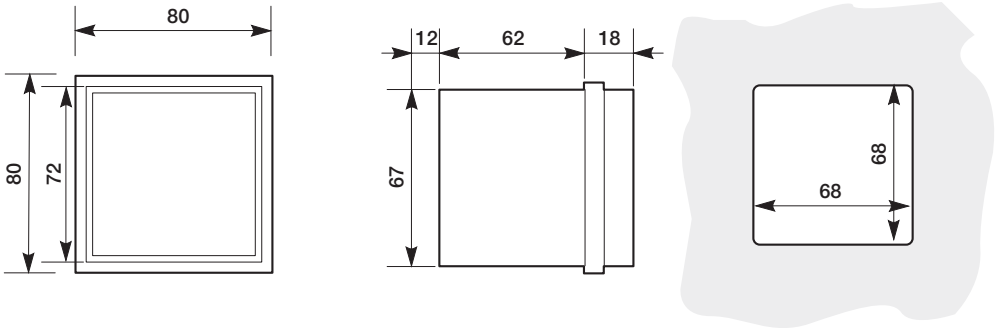

ELR96

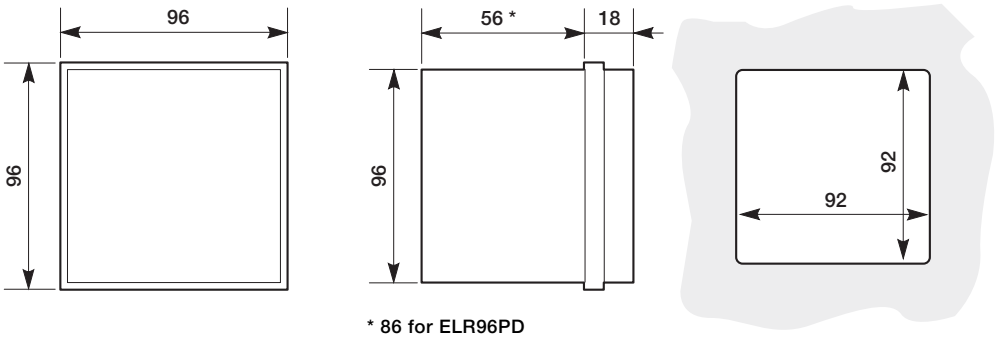

* 86 for ELR96PD

Quick product references

Overall dimensions

Toroidal transformers

TRM

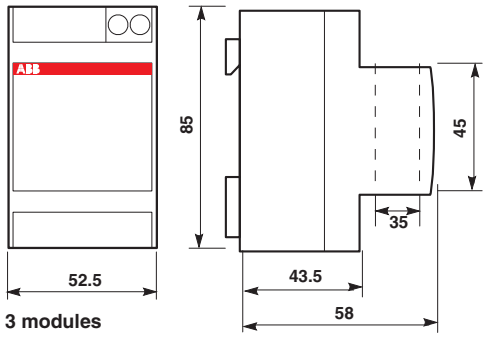

TR1, TR2, TR3, TR4, TR160, TR160A

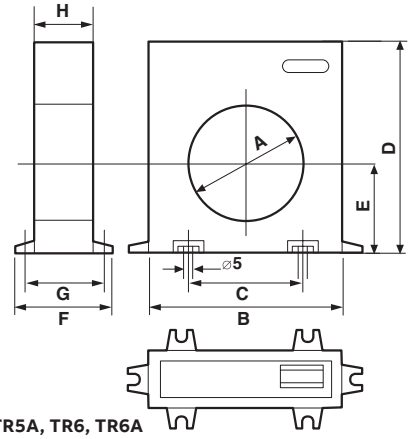

TR4A

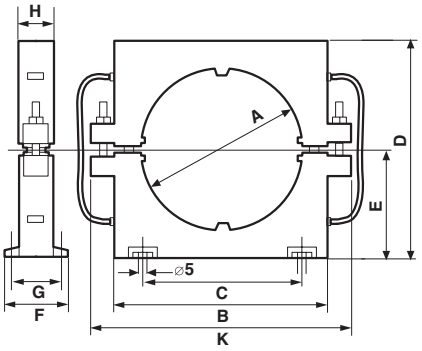

TR5, TR5A, TR6, TR6A

TR5A, TR6A

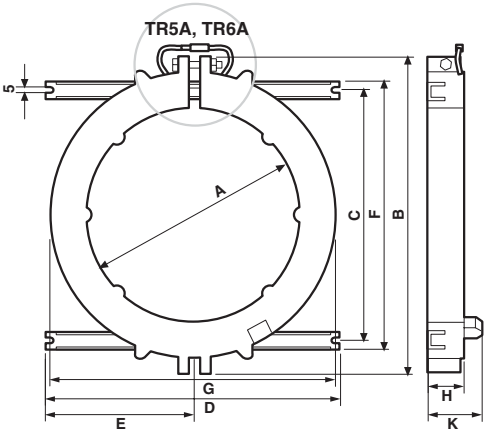

Type	Dimensions (mm)								
	A	B	C	D	E	F	G	H	K
TR1	35	100	60	110	47	50	43	30	–
TR2	60	100	60	110	47	50	43	30	–
TR3	80	150	110	160	70	50	43	30	–
TR4	110	150	110	160	70	50	43	30	–
TR4A	110	145	110	150	75	45	38	25	180
TR160	160	220	156	236	110	64	50	34	–
TR160A	160	220	156	236	110	64	50	34	–
TR5	210	310	240	290	145	260	280	36	55
TR5A	210	310	240	290	145	260	280	36	55
TR6	300	416	350	386	193	366	365	42	60
TR6A	300	416	350	386	193	366	365	42	60

Quick product references

Overall dimensions

Bottom-fitting auxiliary contact (with S 200 MCB)

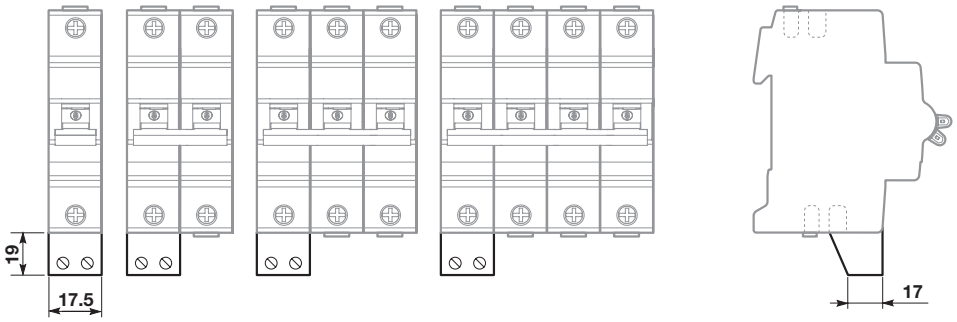

S 2C-EST

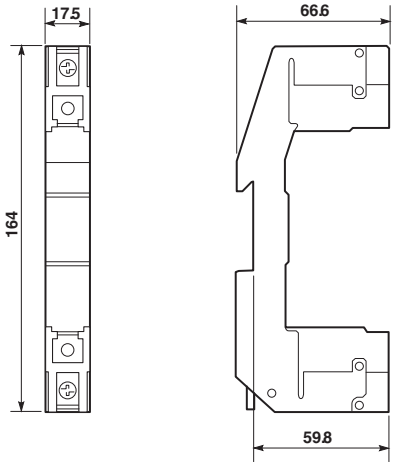

S 2C-CM

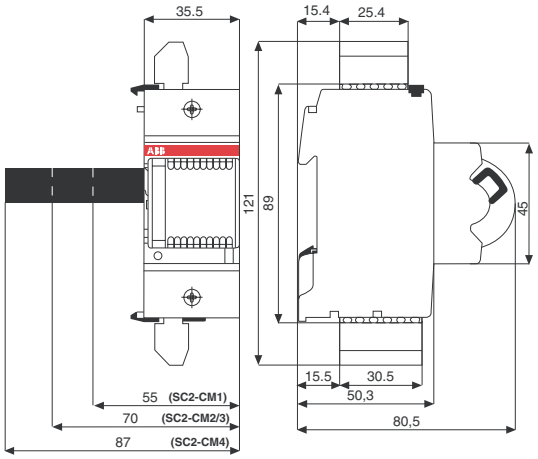

Quick product references

Overall dimensions

F2C-ARI, F2C-CM

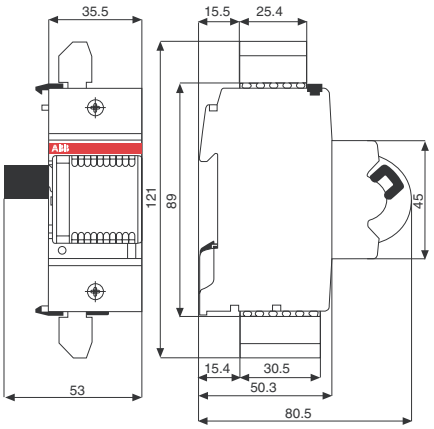

F2 CM4

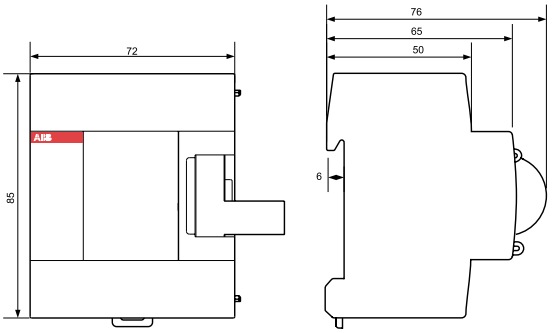

F2C-ARH, F2C-ARH-T

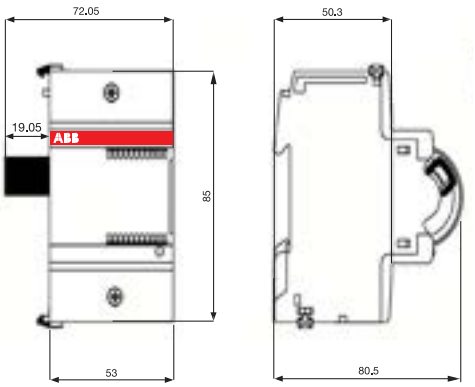

ARBus

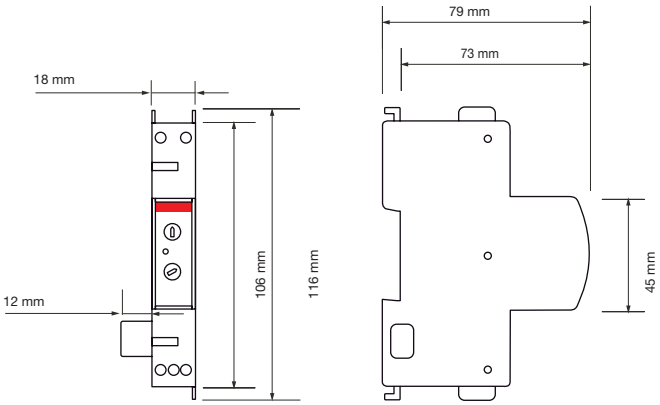

F-ARI Test

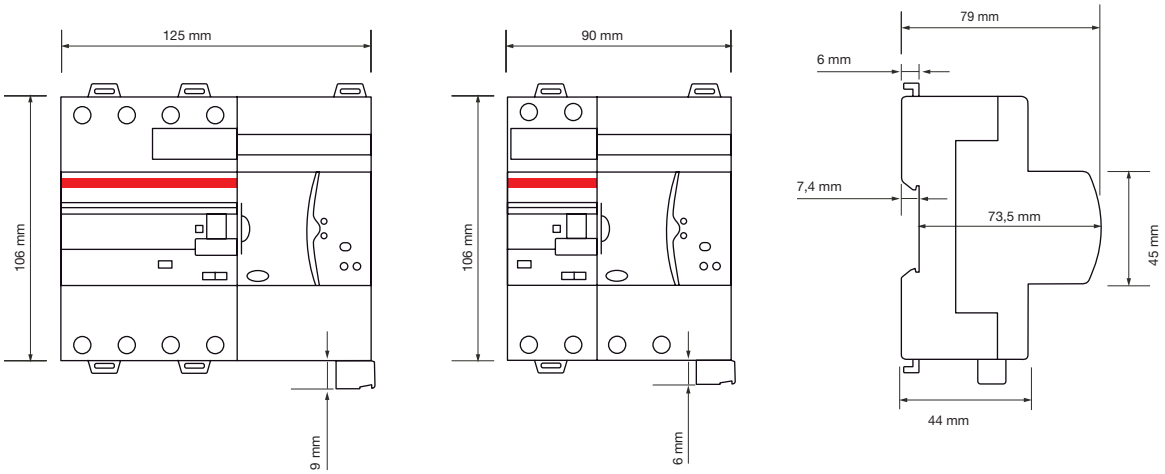

Quick product references

Overall dimensions

Auxiliary elements for DS301C,SN201, DS203NC series

SCC-S

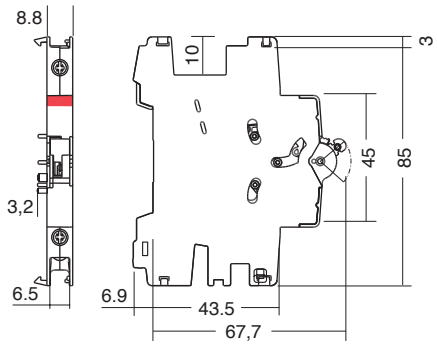

SCC-IH

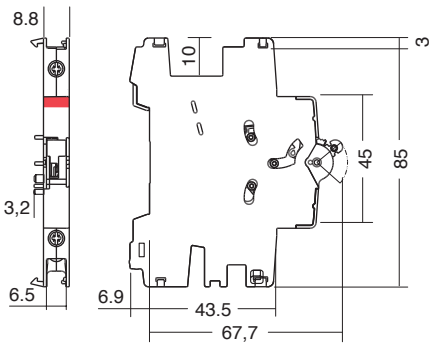

S800-AUX, S800-AUX/ALT

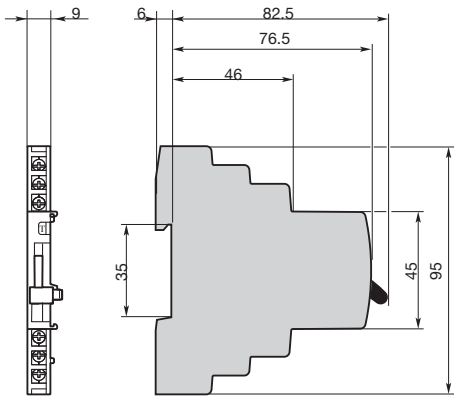

S800-RSU-H

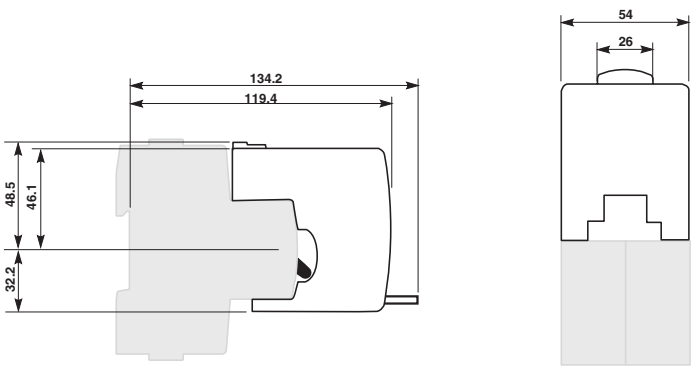

Quick product references

Overall dimensions

S800-RD+S800-RHE, S800-NT, S800-BB250, S800-BBPC120

S800-RD+S800-RHE

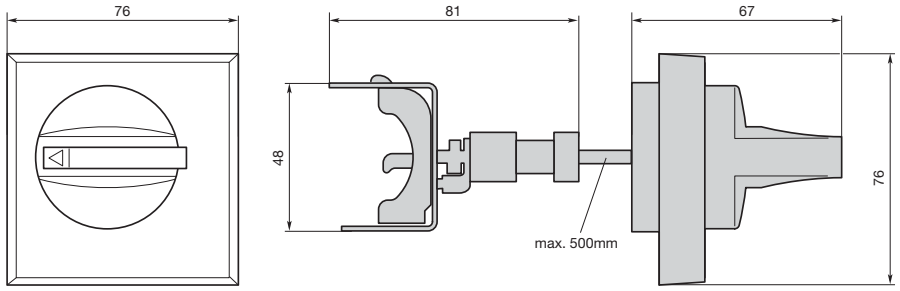

S800-BB250



S800-NT

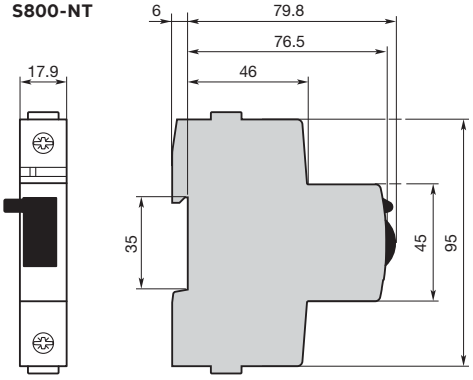

S800-BBPC120

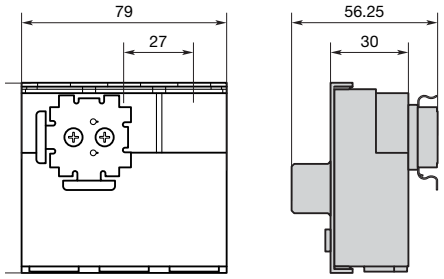

S802-LINK50
S802-LINK125

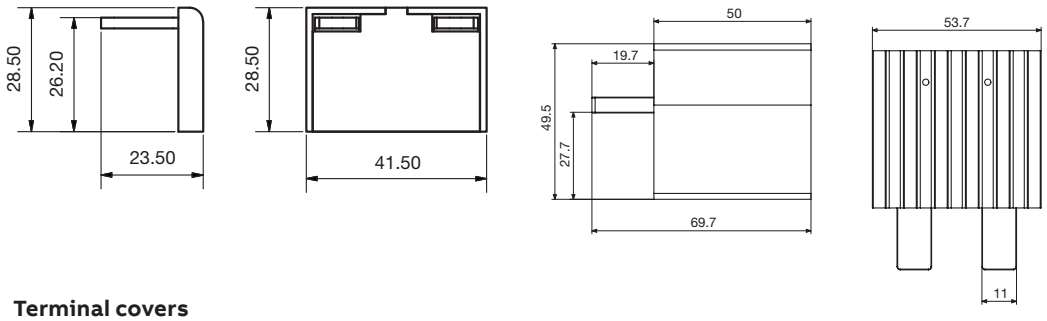

Terminal covers

PCD 2 N



PCD 4 N



PCD 6 N



PCD 8 N

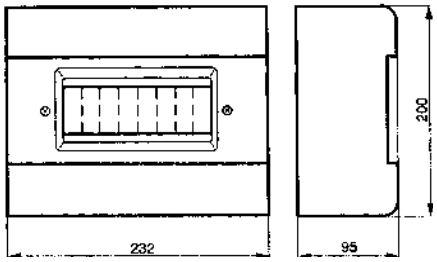

Quick product references

Overall dimensions

Enclosures of moulded-plastic

N + PE common terminals for QES

SMO 4



SMO 6

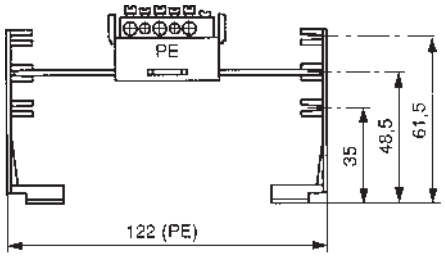



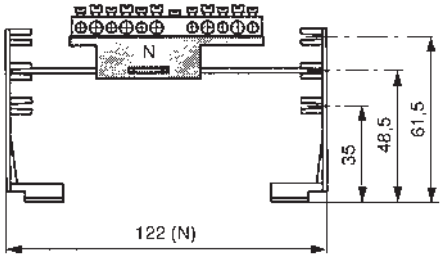

SMO 10

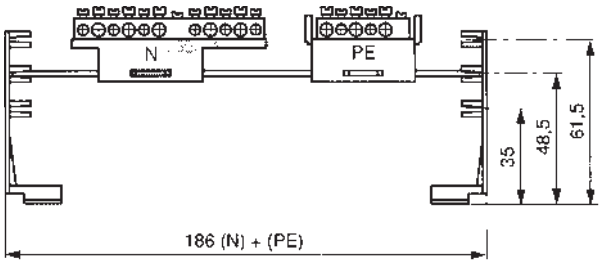

QES 10/3 N

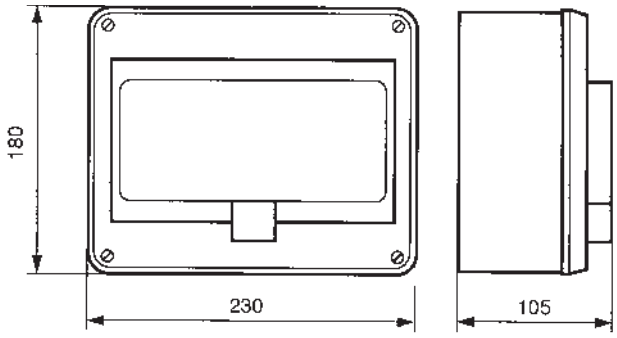

Quick product references

Overall dimensions

Drill holes

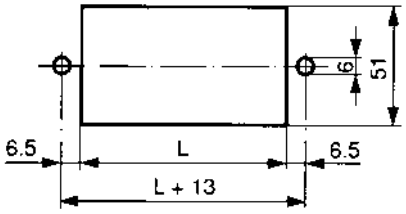

① **In the case of DSW 1, the drill holes are vertical**



Name	A	A1
DSW	17.5	15
DSW 2	35	20
DSW 3	52.5	37.5
DSW 4	70	55
DSW 6	105	90

Quick product references

Overall dimensions

Busbars

PS 1/2



PS 1/6

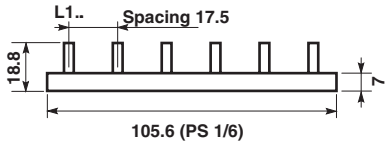

PS 1/9

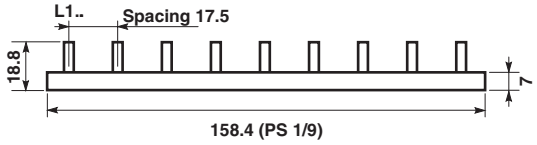

PS 1/12

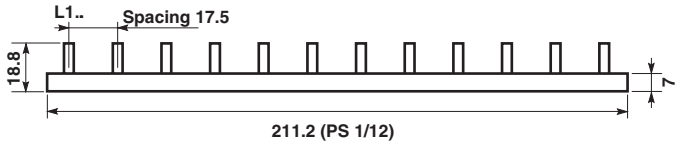

PS 3/60

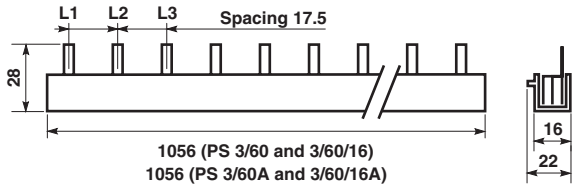

Auxiliary contact bridge HKB



Quick product references

Overall dimensions

PS 3/6

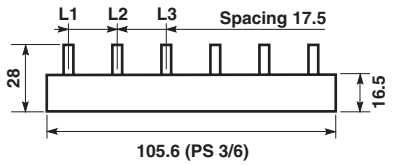

PS 3/9

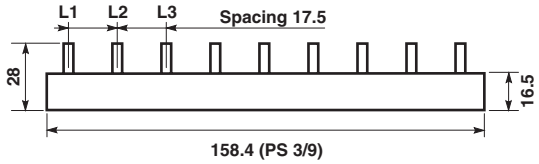

PS 3/12 (2CDL 230 001 R1012)

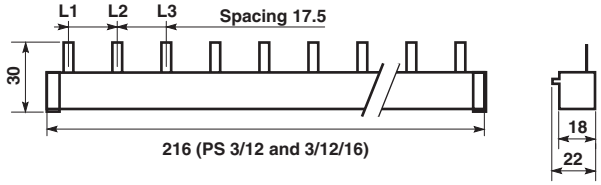

PS 3/12 FI (2CDL 230 002 R1012)

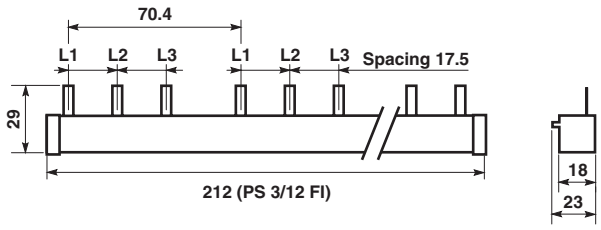

PS 2/12

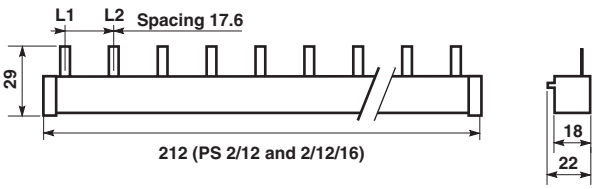

PS 2/58

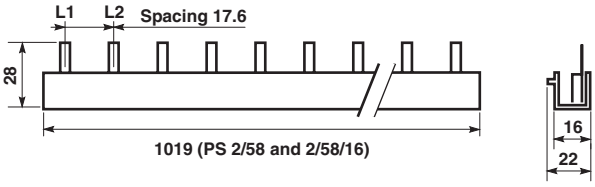

PS 2/48

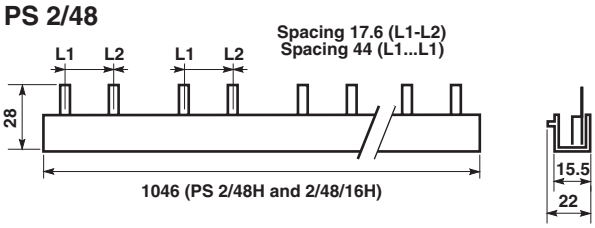

PS 3/39H

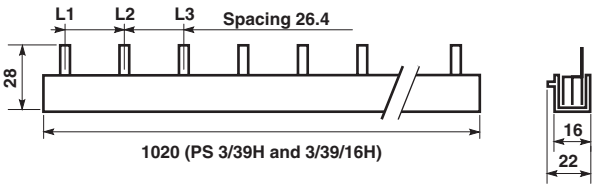

PS 3/48H

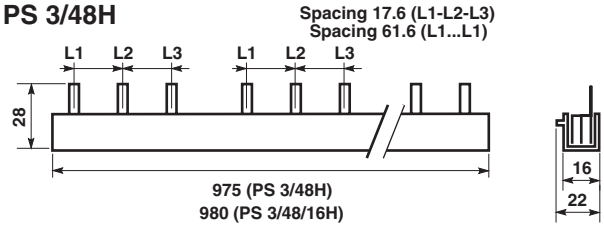

Quick product references

Overall dimensions

PS 3/12 FI H

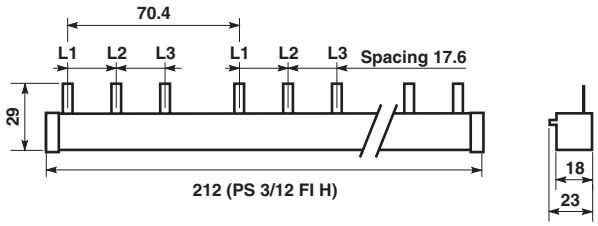

Busbar PS...CB-CR

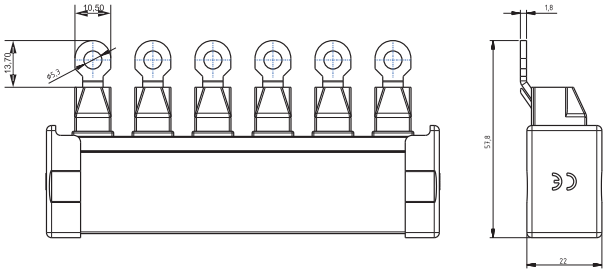

PS 4/12

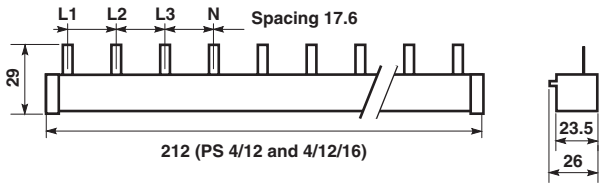

PS 4/60

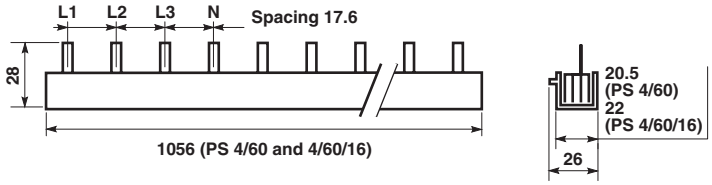

PS 4/58N

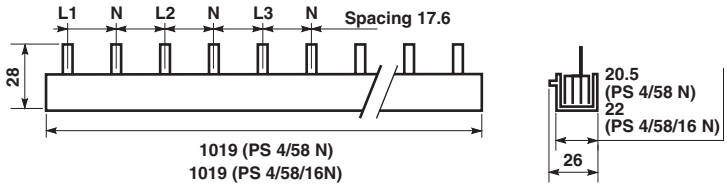

PS 3/12 E 463

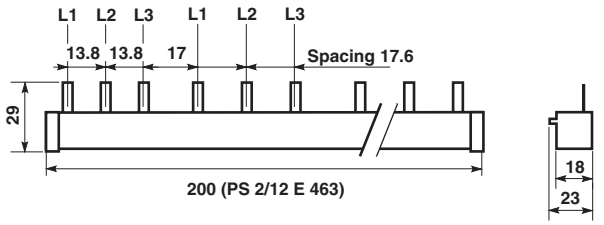

Quick product references

Overall dimensions

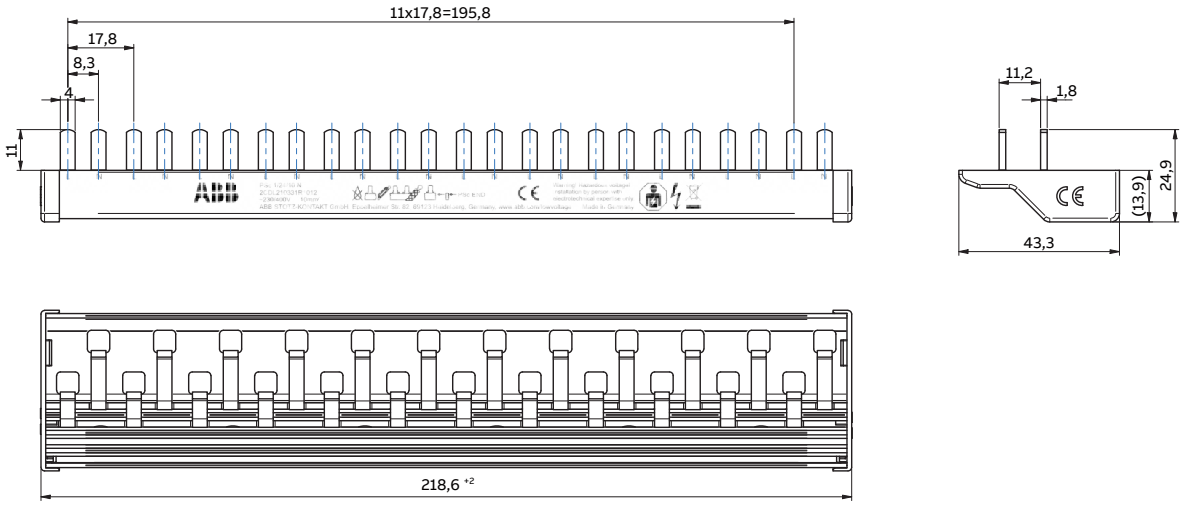

PSc 1/24/10 N

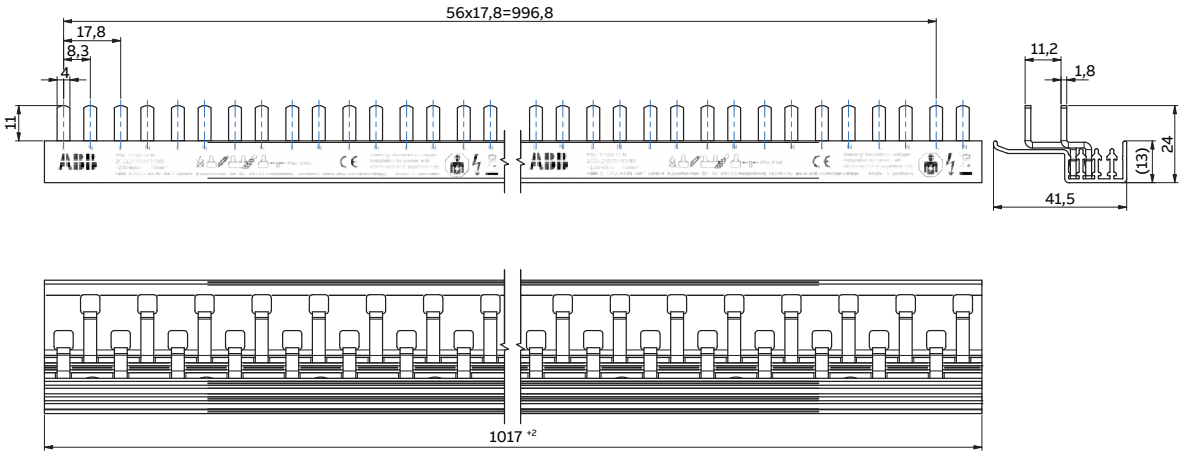

PSc 1/120/10 N

Quick product references

Overall dimensions

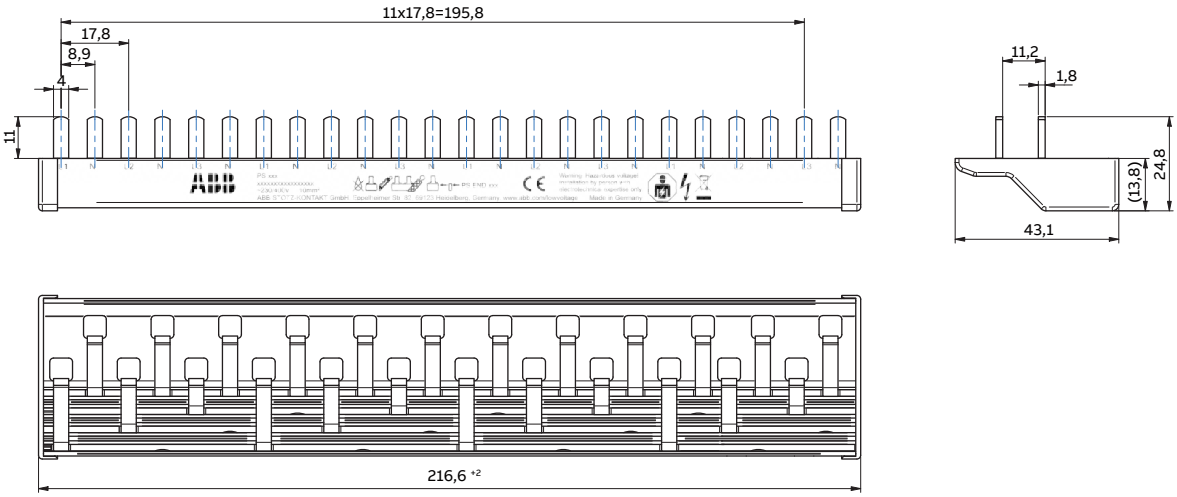

PSc 3/24/10 N

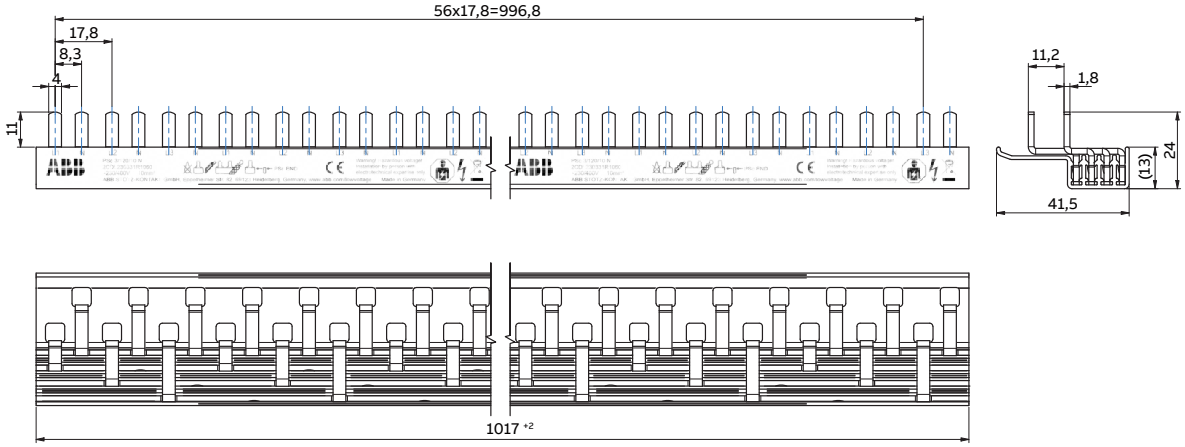

PSc 3/120/10 N

Quick product references

Overall dimensions

Busbars PS...CB and accessories acc. to UL 508

1-phase busbars

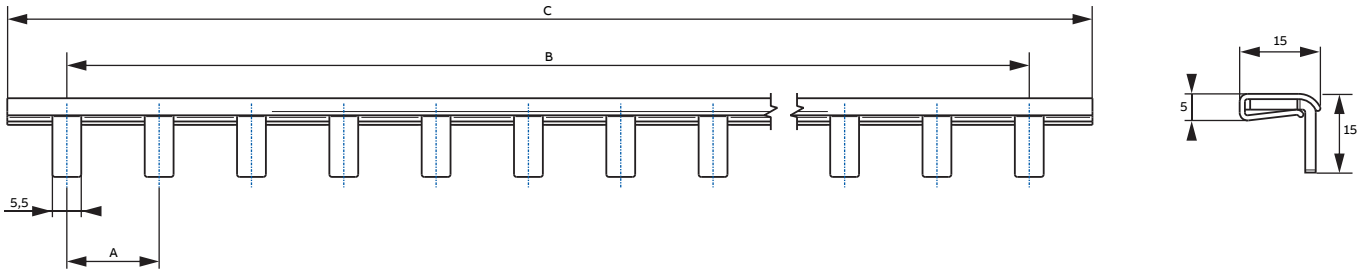

2-/3-phase busbars

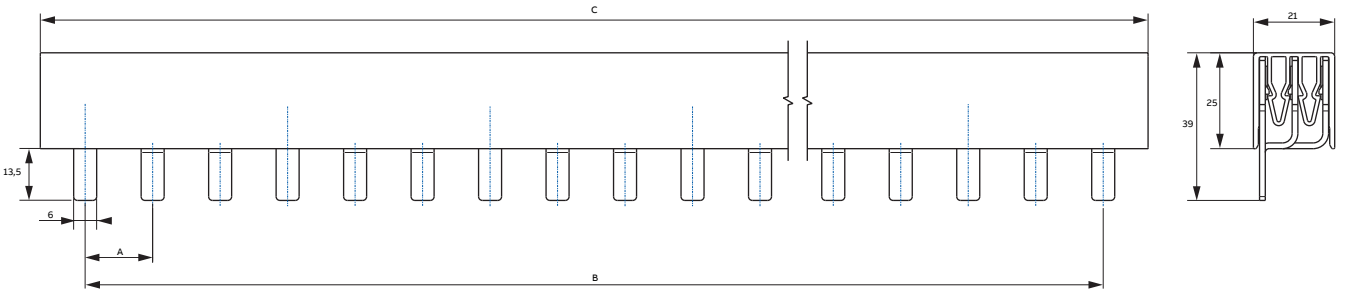

Overall dimensions

Busbar	A mm	B mm	C mm
1-phase busbars			
PS 1/57/18 CB	17.6	986	1010
PS 1/57/25 CB	17.6	986	1010
PS 1/37/18 H CB	26.4	950	985
PS 1/37/25 H CB	26.4	950	985
2-phase busbars			
PS 2/56/18 CB	17.6	968	990
PS 2/56/25 CB	17.6	968	990
PS 2/46/18 H CB	17.6 / 26.4 *	968	1010
PS 2/46/25 H CB	17.6 / 26.4 *	968	990
3-phase busbars			
PS 3/57/18 CB	17.6	986	1010
PS 3/57/25 CB	17.6	986	1010
PS 3/48/18 H CB	17.6 / 26.4 *	924	982
PS 3/48/25 H CB	17.6 / 26.4 *	924	982
PS 3/39/18 H CB	26.4	1003	1040
PS 3/39/25 H CB	26.4	1003	1040

* pin gap for auxiliary

Quick product references

Overall dimensions

ME flange for rear board mounting

DEPHT D
57 mm for S 240-S 250-
S 270-S 280 circuit-breakers

72 mm for S 210 circuit-breakers



TYPE	A	B	C
ME 1 - 1 module	18	40	50
ME 2 - 2 modules	36	57.5	67
ME 3 - 3 modules	54	75.5	85
ME 4 - 4 modules	72	93	103
ME 6 - 6 modules	108	129	139
ME 8 - 8 modules	144	164	172





OH_2A_







Quick product references

Overall dimensions

E90 50/125

E 90/50

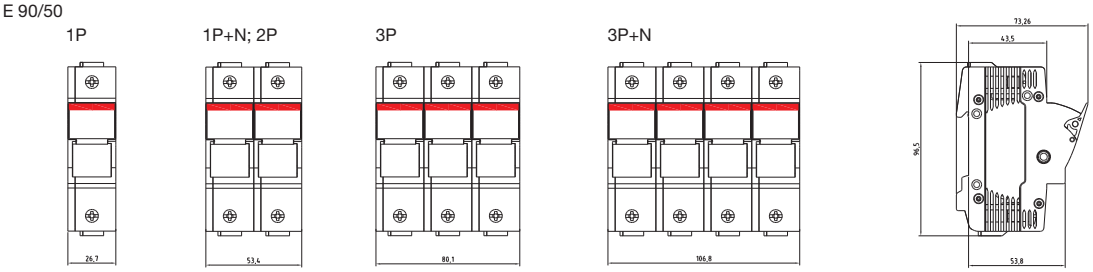

E 90/125

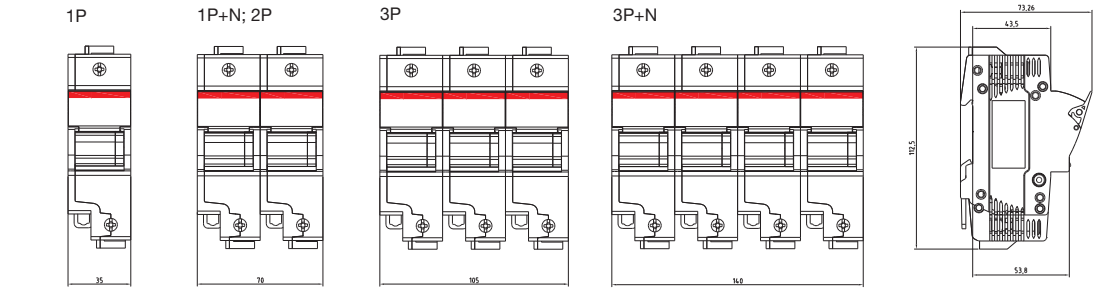

E90 30/60 J class

E 90/30 classJ

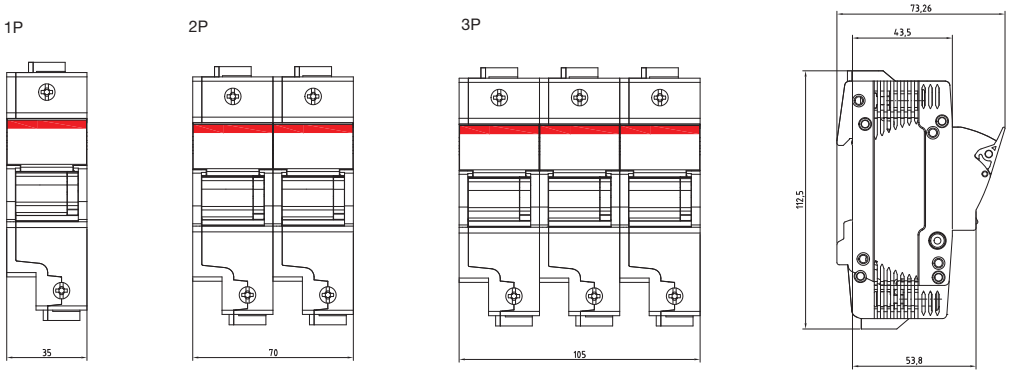

E 90/60 classJ

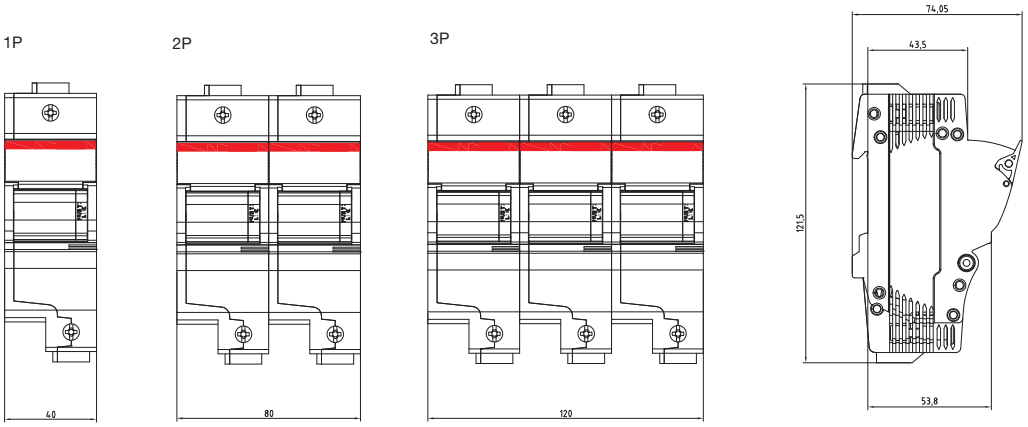

Quick product references

Overall dimensions

E90/32 PV 1500

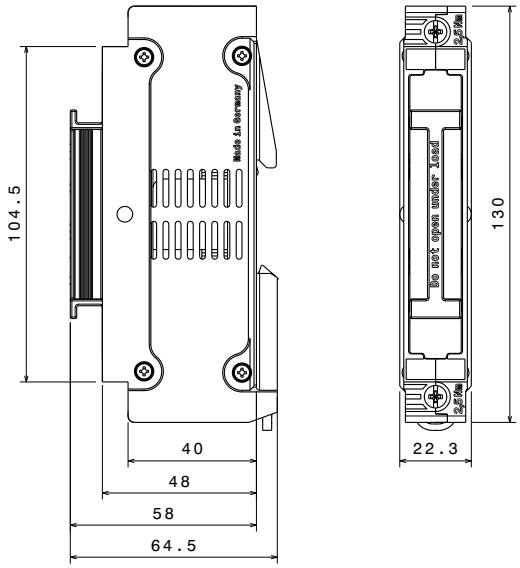

QSD remote signaling panels

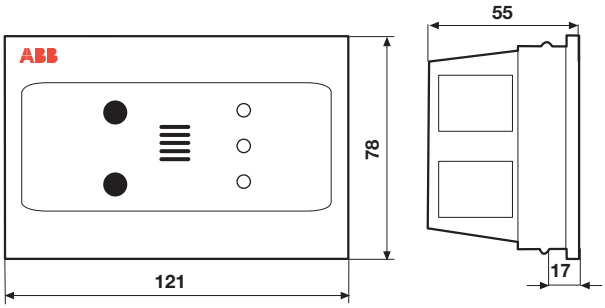

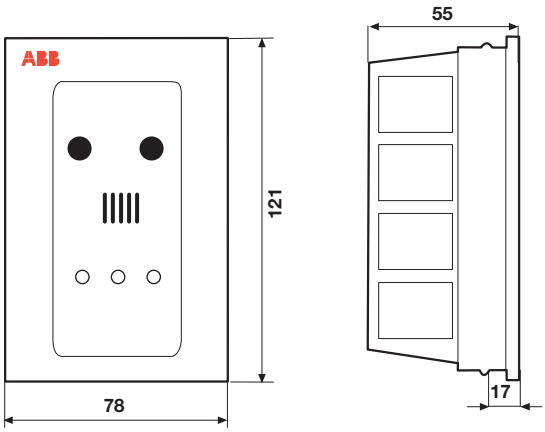

Quick product references

Overall dimensions

QSO electrical switchboard for medical locations

QSO S



QSO M

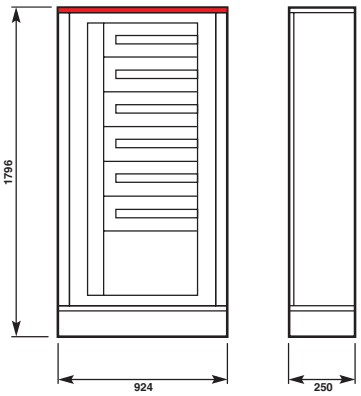

QSO L

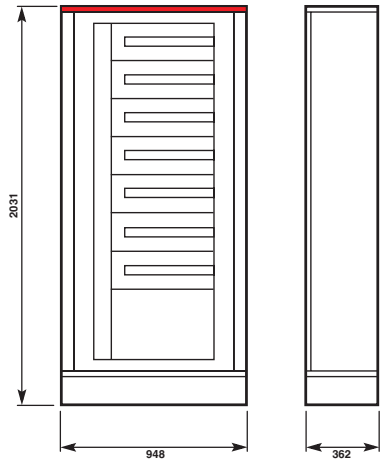

Quick product references

Overall dimensions

TI insulating transformers

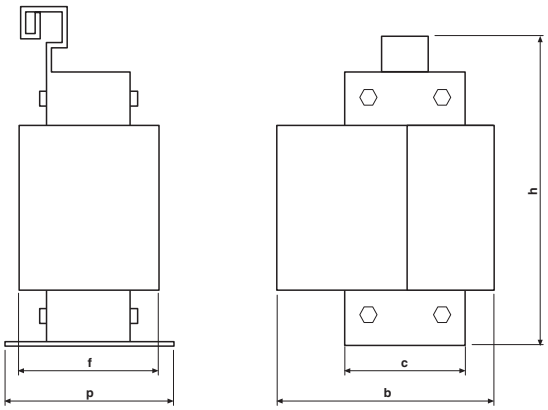

	Rated output [KVA]			
Dimensions	**3**	**5**	**7,5**	**10**
b [mm]	205	240	240	280
c [mm]	170	170	170	176
f [mm]	115	115	115	173
h [mm]	340	380	380	380
p [mm]	150	150	160	260
Weight [kg]	29,5	44	50,5	73

Quick product references

Overall dimensions

E290 Latching Relays

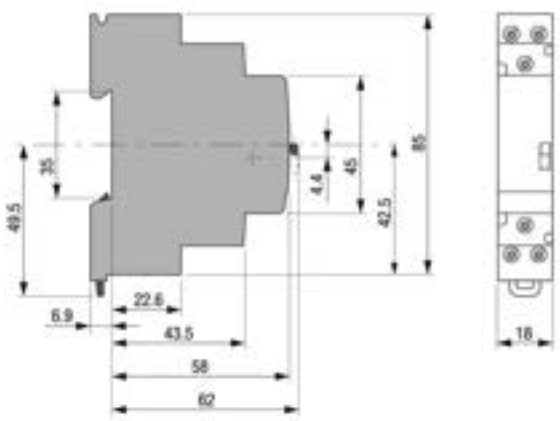

E297 Installation Relays

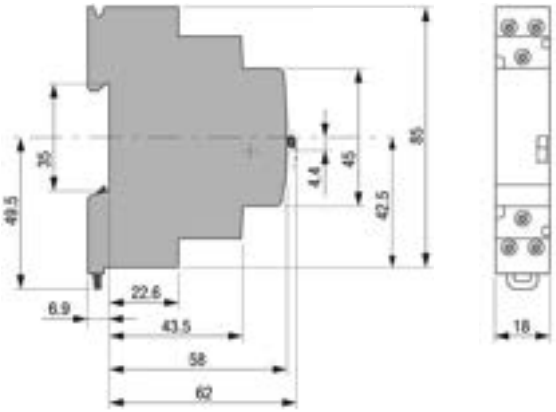

E291S Sequential Latching Relay

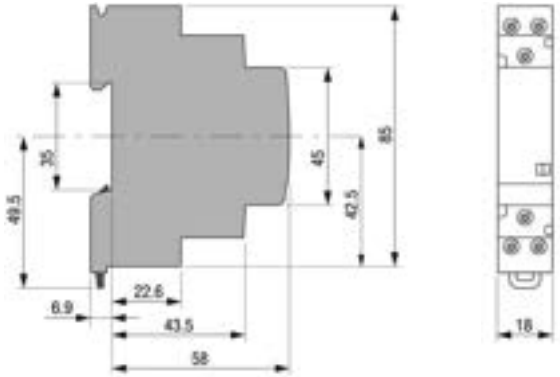

E298 Main Contact Module

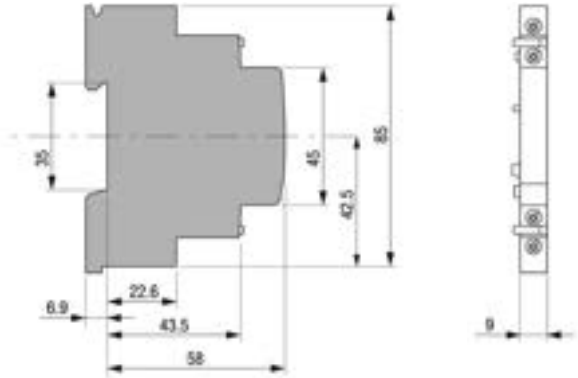

E292 Main Contact Module

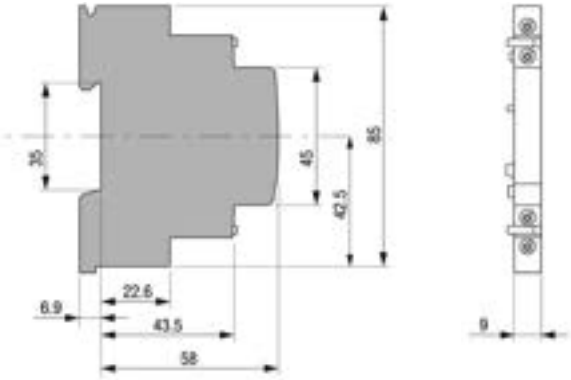

E299-11 Auxiliary Contact

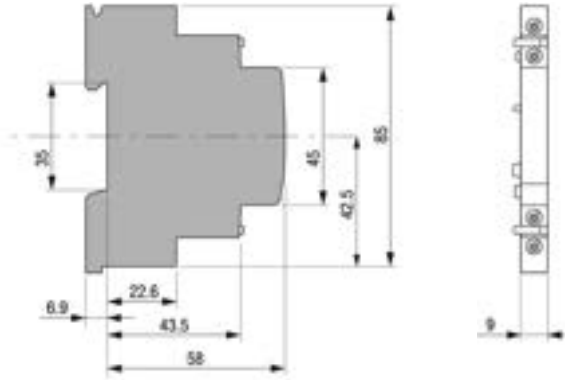

Quick product references

Overall dimensions

E293/X Central On-Off Control Module

(for same control voltage potential)

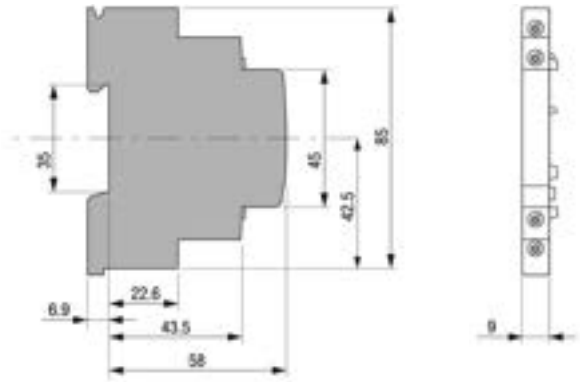

E295-PS Permanent Signal Module

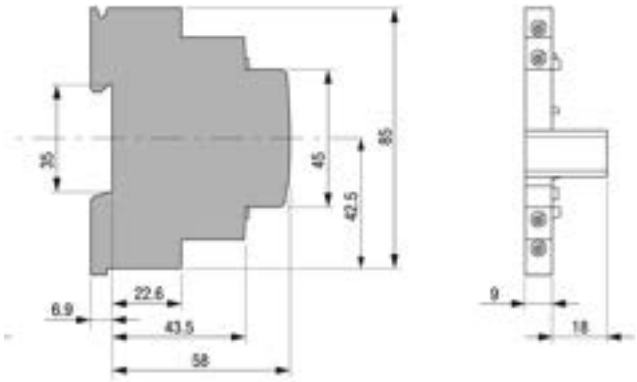

E294 Central On-Off Control Module

(for different control voltage potential)

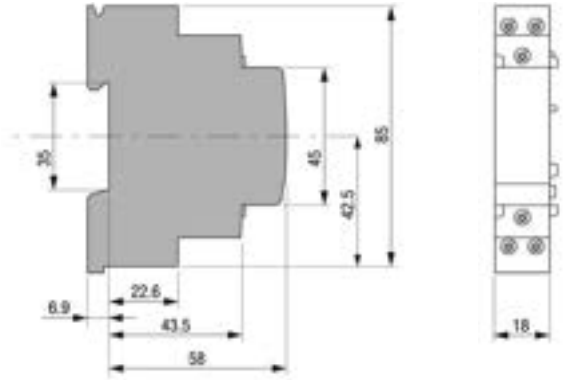

E296-CP Compensator

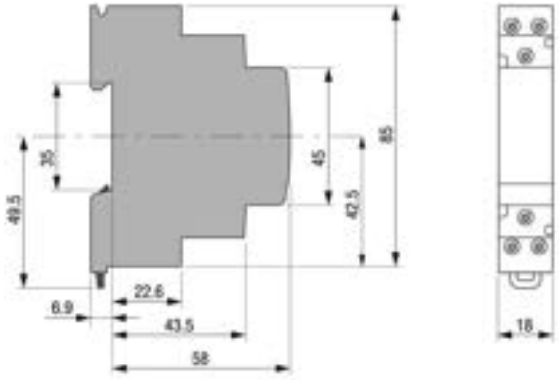

E295-GM Group Module

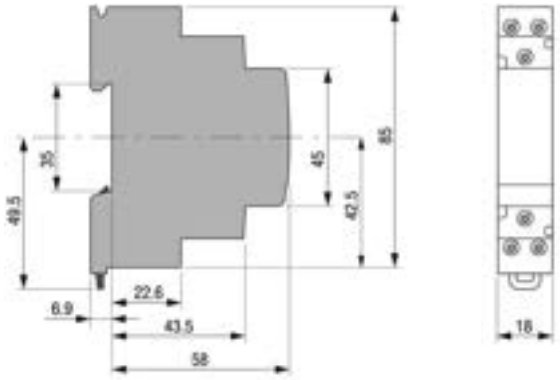

E299-11 Auxiliary Contact

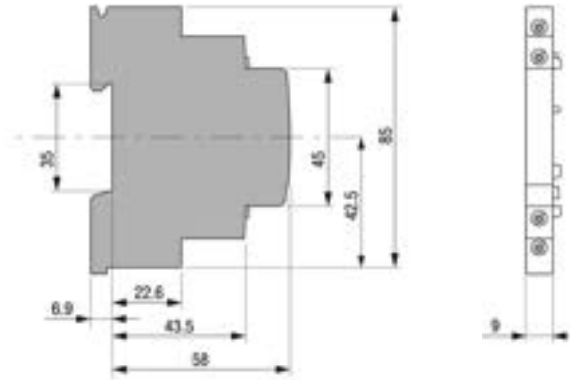

Quick product references

Overall dimensions

FLR pulse relays

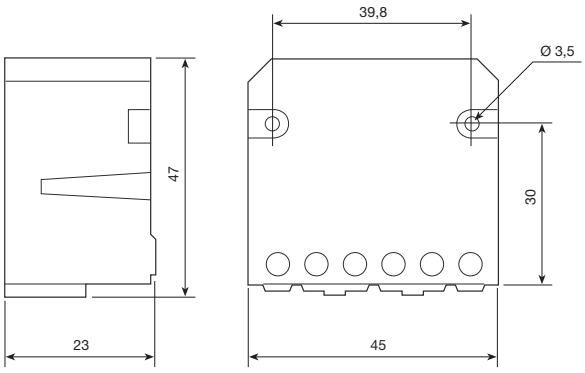

STD dimmers

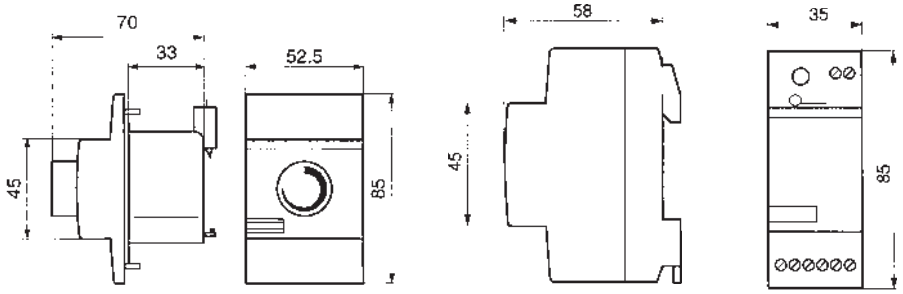

STD 50
STD-EP

3 modules

STD-500 MA
STD-MTS

2 modules

AT72e electro-mechanical time switches

AT72e, AT72e-R, AT72e-7R

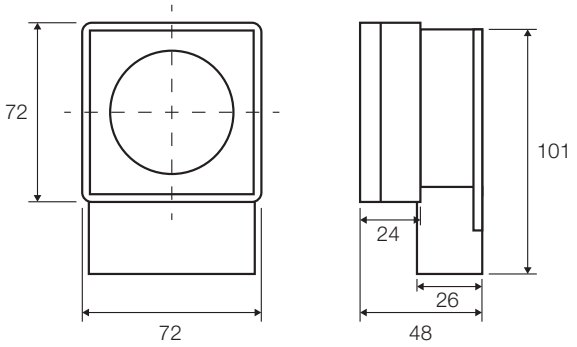

Quick product references

Overall dimensions

T1 POLE

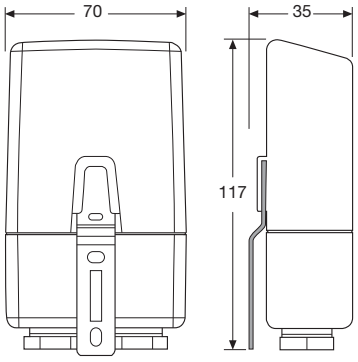

LS-D

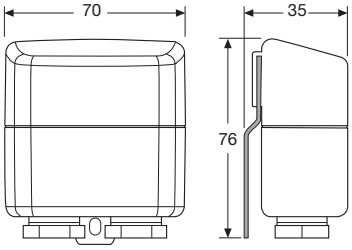

Quick product references

Overall dimensions

MCV - MCA voltmetric and ammetric switches

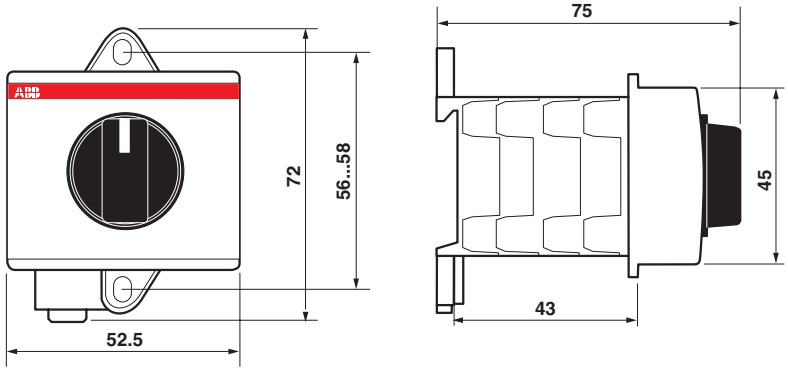

3 modules

QCV - QCA front panel voltmetric and ammetric switches

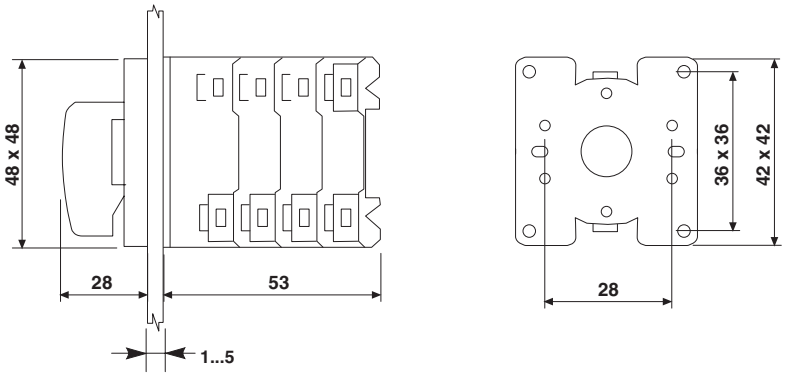

Quick product references

Overall dimensions

M4M 20,
M4M 30

Dimensions
A: 96 mm
B: 96 mm
C: 77,5 mm
D: 57 mm
E: 20,5 mm
F: 92 mm

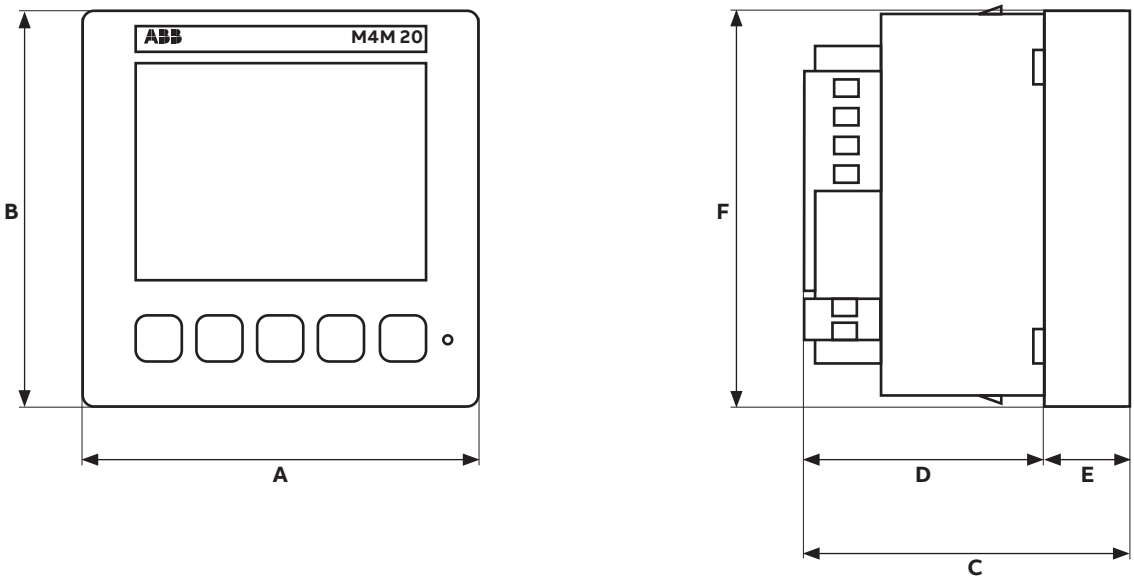

M4M 2X

Dimensions
A: 96 mm
B: 96 mm
C: 77.5 mm
D: 53.5 mm
E: 22 mm
F: 92 mm

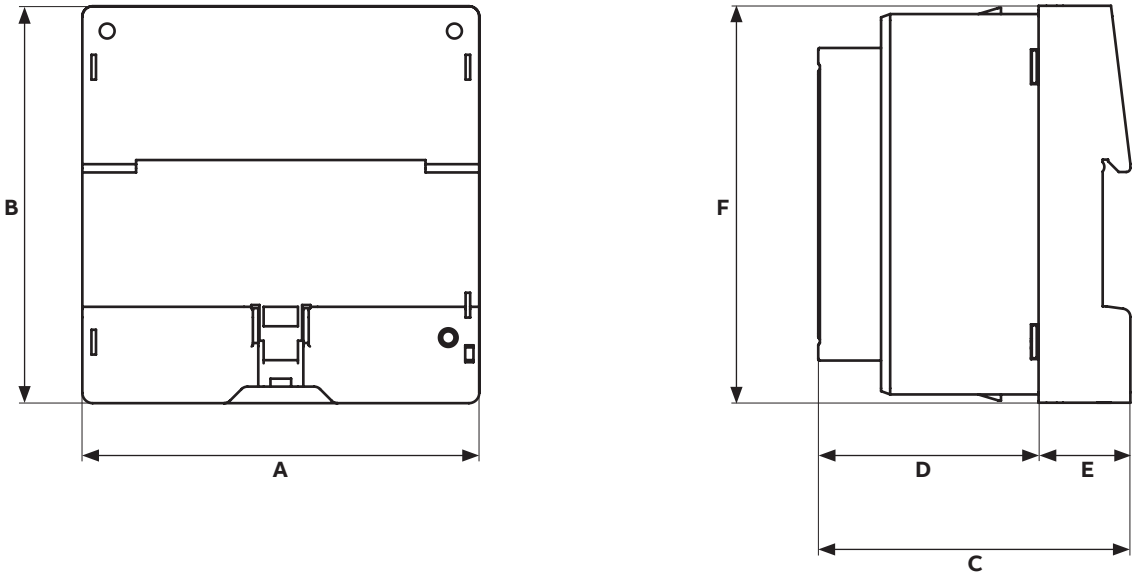

Quick product references

Overall dimensions

—
01
Same dimensions for all D1M 15, 20 versions.

All measurements are expressed in mm.

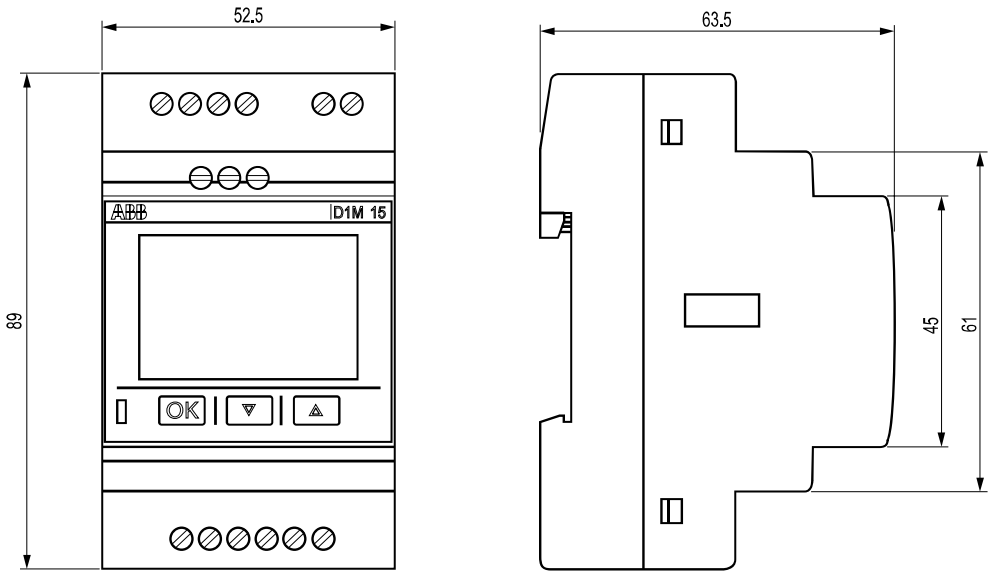

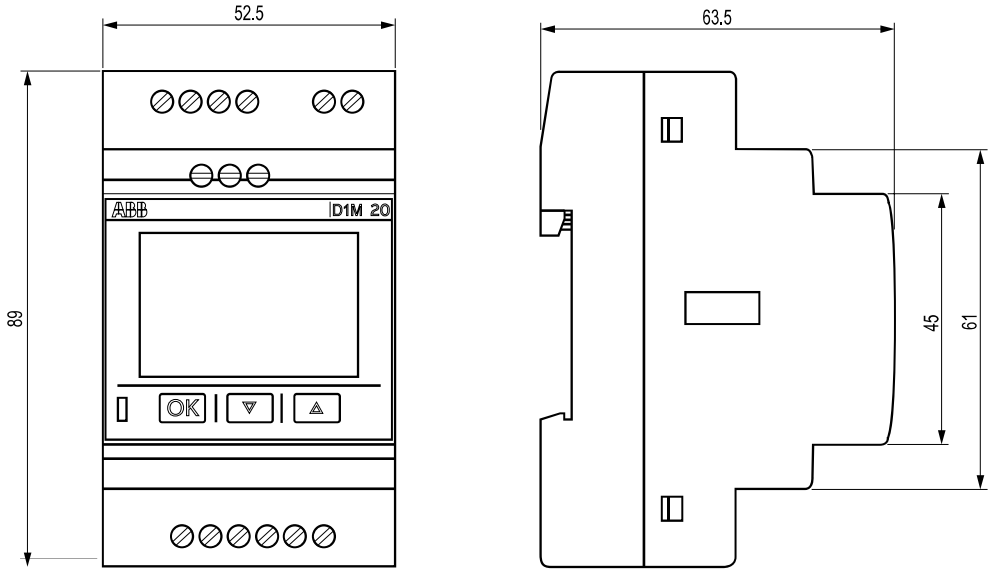

Quick product references

Overall dimensions

Modular current transformers with through primary

TRF M

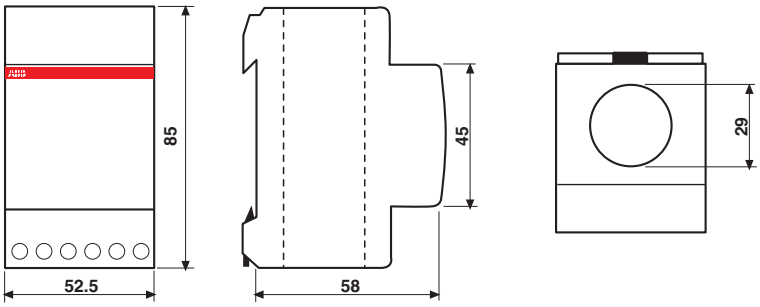

3 modules

Standard type current transformers.../5 A with wound primary

CTA

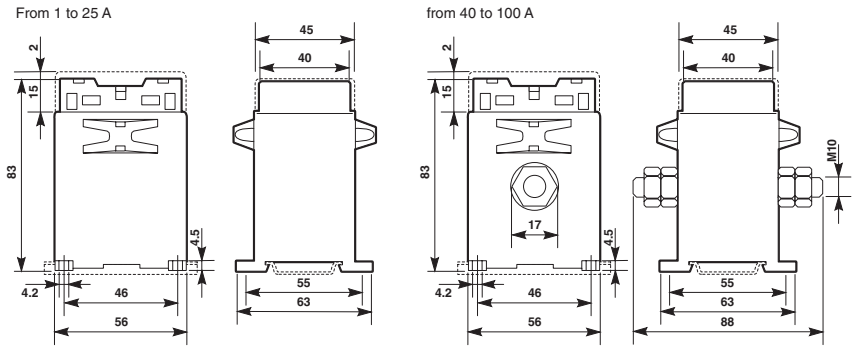

Quick product references

Overall dimensions

Standard type current transformers...5 A with through primary

CT PRO XT

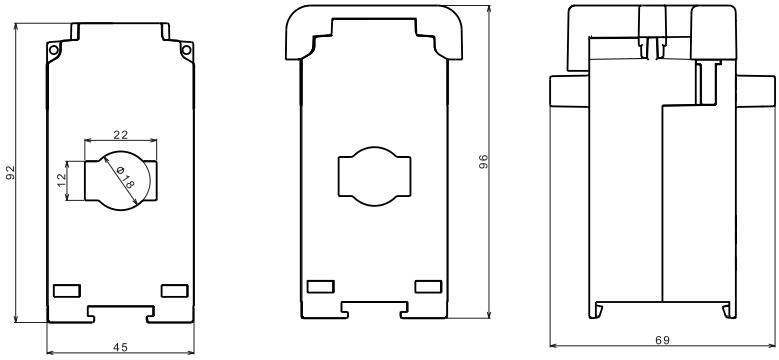

CT MAX

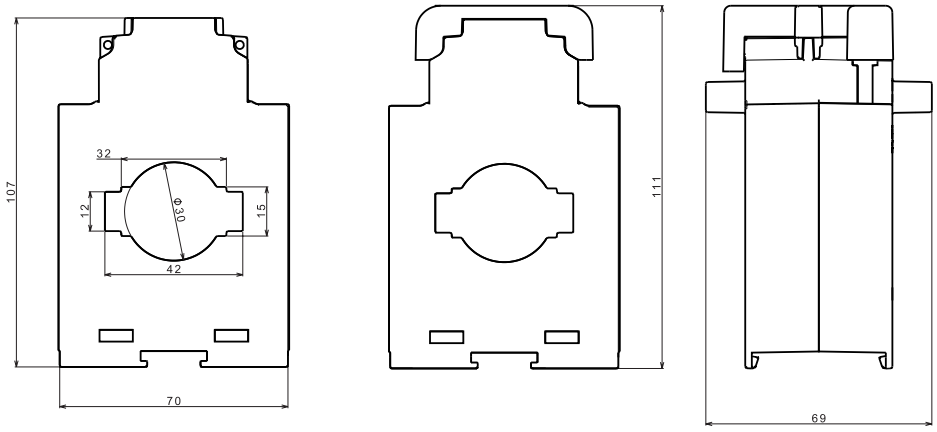

Quick product references

Overall dimensions

CTO

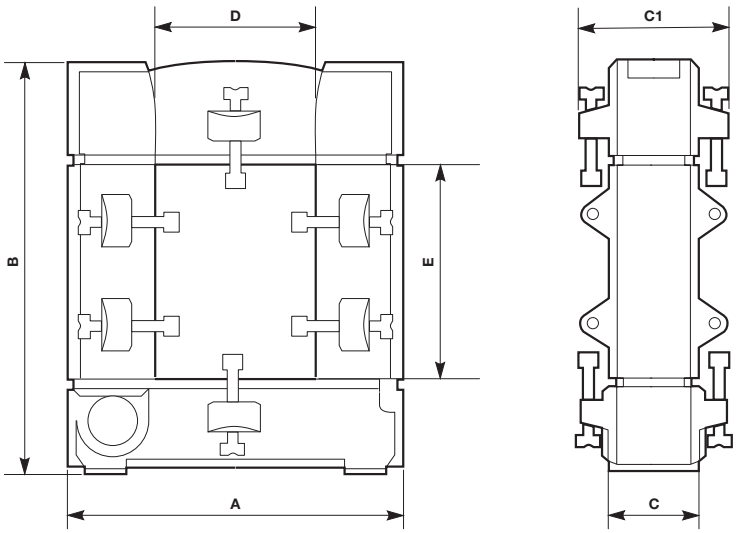

Tipo	A	B	C	C1	D	E
CT30...	93	106	34	58	20	30
CT80...	125	152	34	58	50	80
CT120...	155	198	34	58	80	120

Voltage transformers

TV2

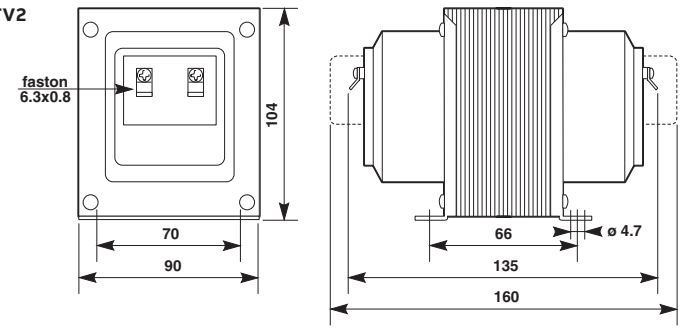

Quick product references

Overall dimensions

Shunts

SNT1 ÷ 25 A/60 mV

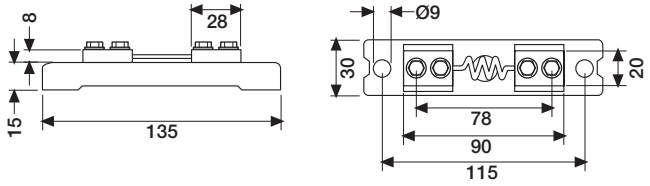

SNT30 ÷ 150 A/60 mV

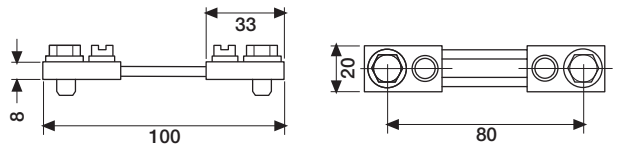

SNT200 ÷ 250 A/60 mV

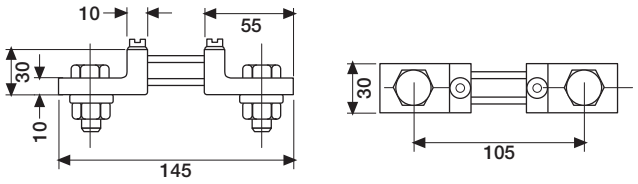

SNT400 ÷ 600 A/60 mV

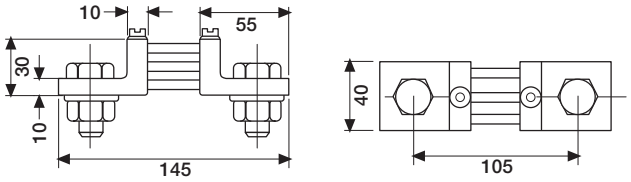

SNT800 ÷ 1000 A/60 mV

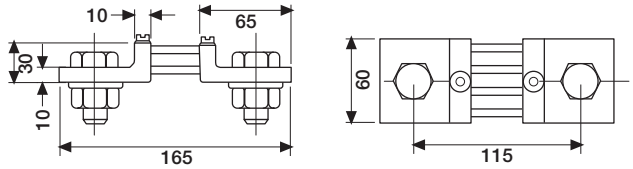

Quick product references

Overall dimensions

TM-C. TM-S, TM-I

from 50 up to 400 VA

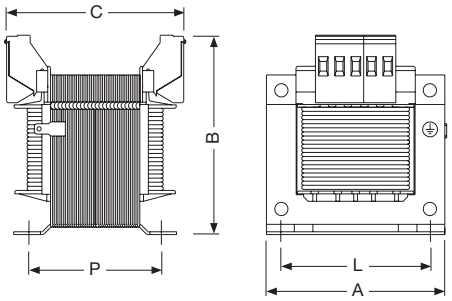

from 630 up to 2500 VA

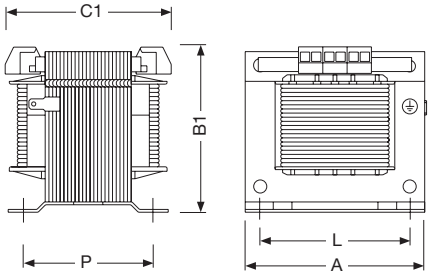

TM-C, TM-S and TM-I Control, Safety and Insolating transformers

Power (VA)	Picture	Dimensions							Screw	Wheigth (Kg)
		A	B	B1	C	C1	P	L		
50	1	80	90	-	74	-	46	56	M4	1.1
100	1	86	96	-	87	-	63	64	M4	2
160	1	100	110	-	90	-	73	84	M5	3
200	1	100	110	-	90	-	73	84	M5	3.2
250	1	100	110	-	110	-	89	84	M5	3.6
320	1	123	122	-	102	-	73	90	M5	4.4
400	1	123	122	-	112	-	85	90	M5	5.5
630	2	154	-	150	-	126	90	122	M6	7.8
1000	2	155	-	150	-	168	133	122	M6	13.2
1600	2	200	-	195	-	200	125	155	M8	21.2
2000	2	200	-	195	-	230	143	155	M8	25.5
2500	2	200	-	195	-	230	153	155	M8	26.8

MA1-8001 DIN rail adapter

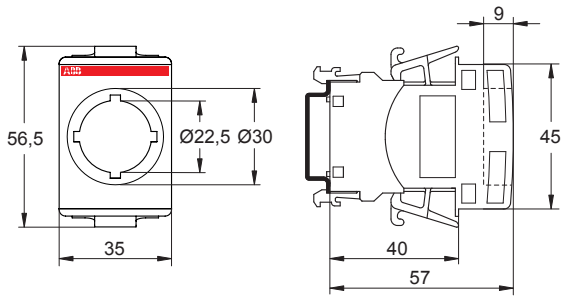

Quick product references

Overall dimensions

1-, 2-, 3- and 4-pole miniature circuit breakers S400

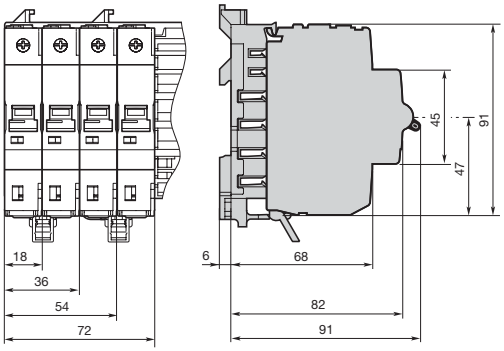

Neutral disconnector

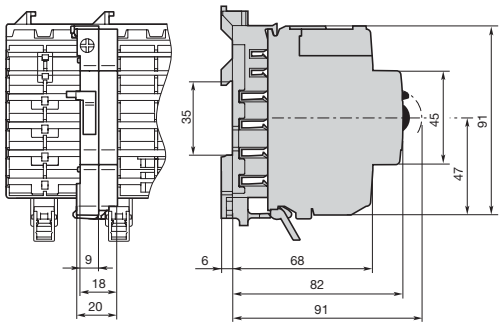

4-pole residual current operated circuit breaker, switch disconnector and surge arrester

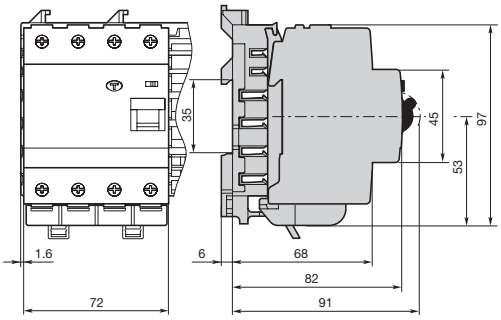

2-pole residual current operated circuit breaker

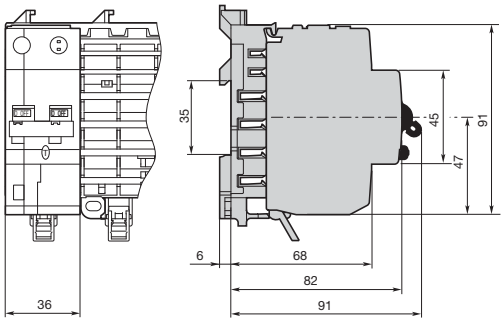

Auxiliary switch and signal contact

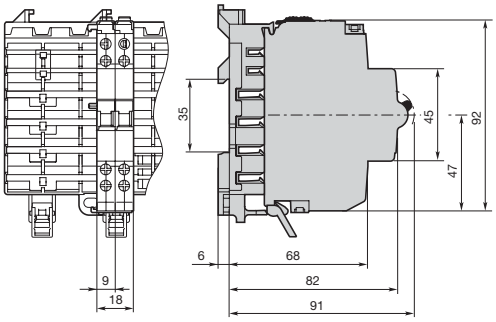

4-pole residual current operated circuit breaker

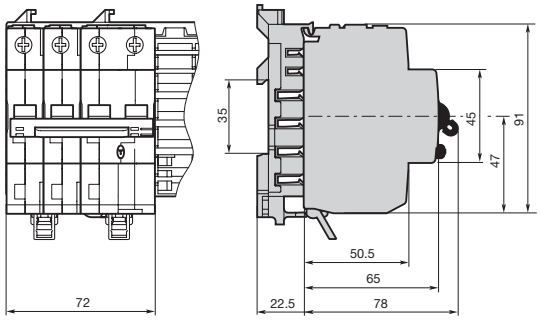

High performance manual motor starter MS325

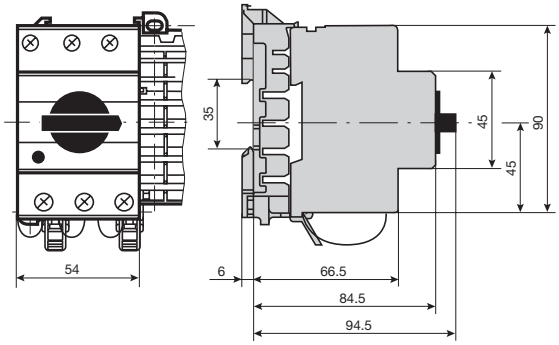

F4C-C M and F4C-AR I

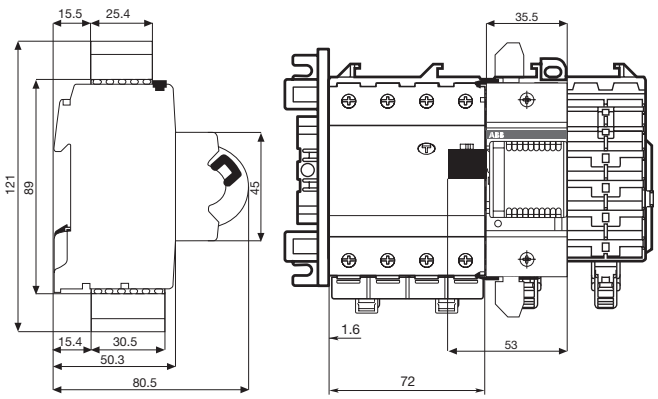

Quick product references

Overall dimensions

Incoming terminal blocks 100 A/160 A

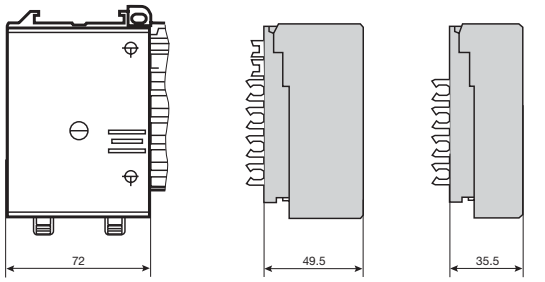

ZLS 224, 225 ZLS 228, 229

Incoming terminal component 200 A

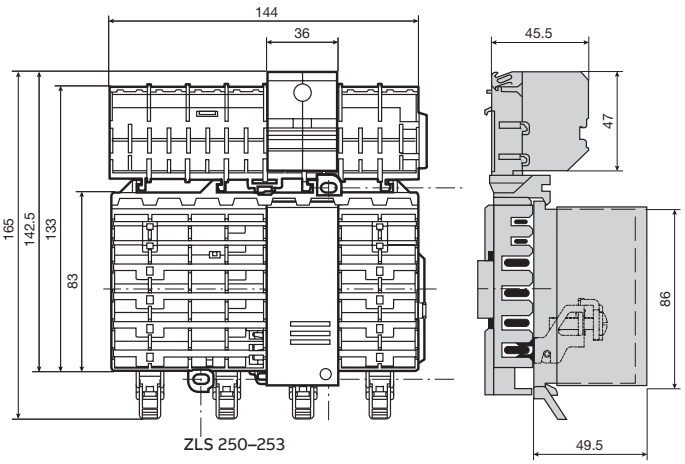

ZLS 250–253

Incoming terminal blocks 63 A
Incoming terminal block LA, LB



ZLS 260-262

Universal adapter
32 A, 63 A

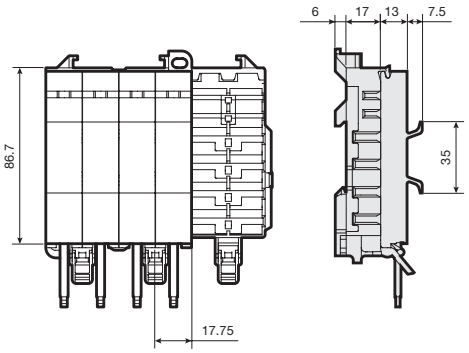

Socket base Z LS908

Receptacle

– 8 dimensional units

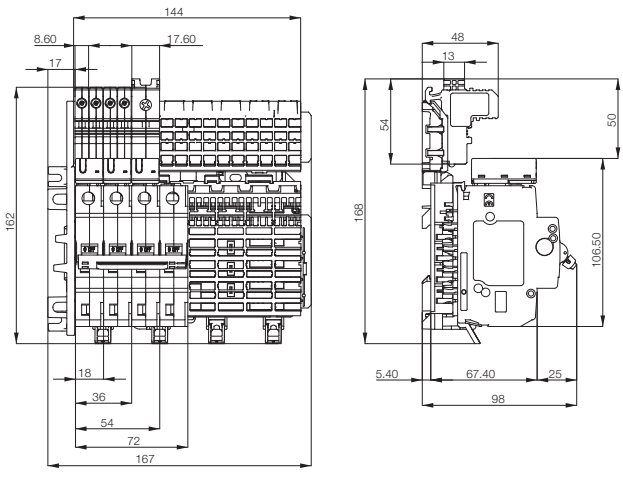

Socket base Z LS906

Receptacle

– 6 dimensional units

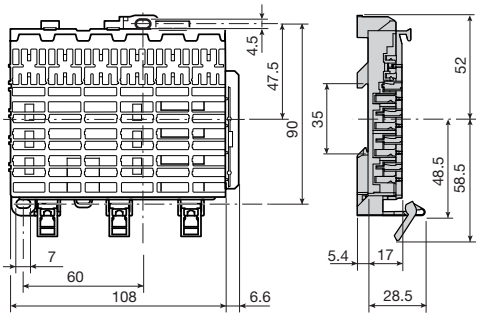

ZLS906

Quick product references

Overall dimensions

Intermediate piece ZLS 725

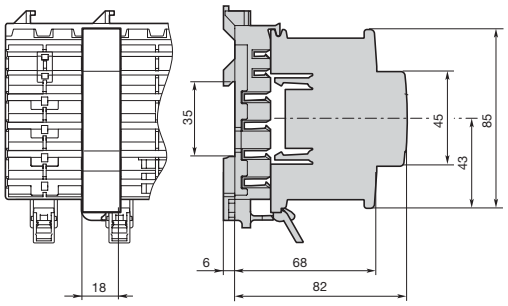

Combi module ZMS132, Adapter MS116/132

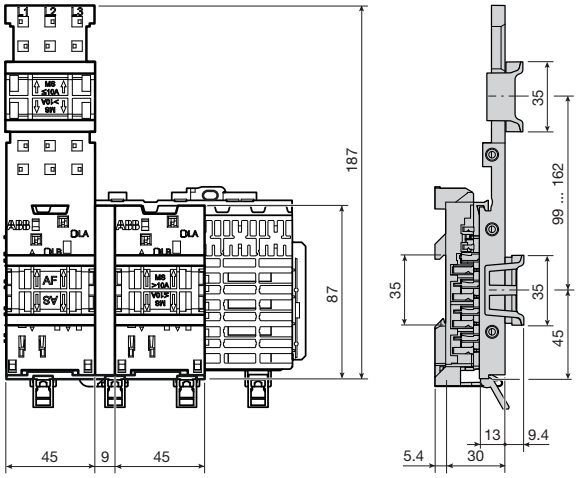

Busbar cover ZLS100

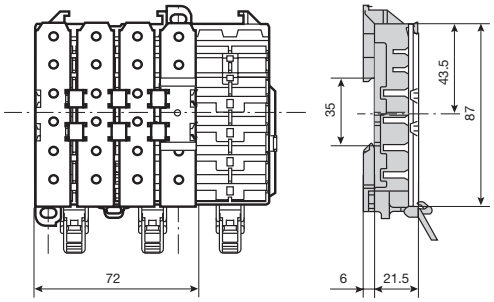

Extension adapter ZLS101

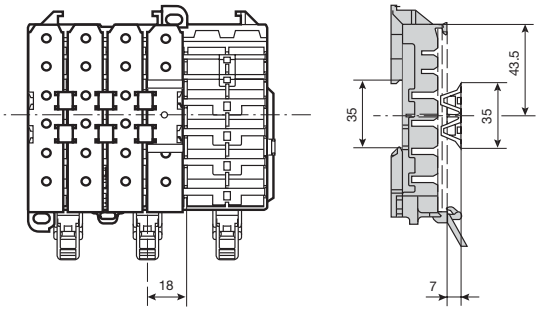

Sensor (CMS-100PS)

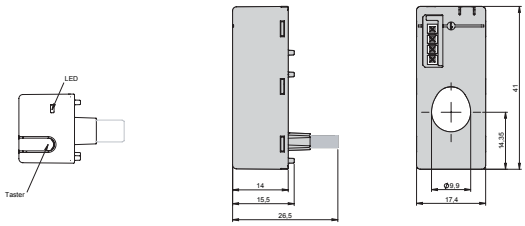

Control Unit (600)

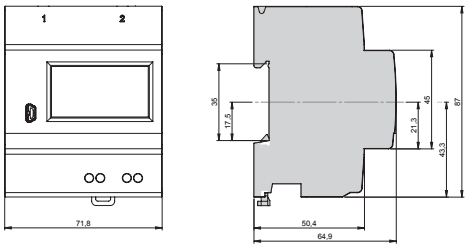

Quick product references

Overall dimensions

UK600 Flush-mounting series – Consumer unit

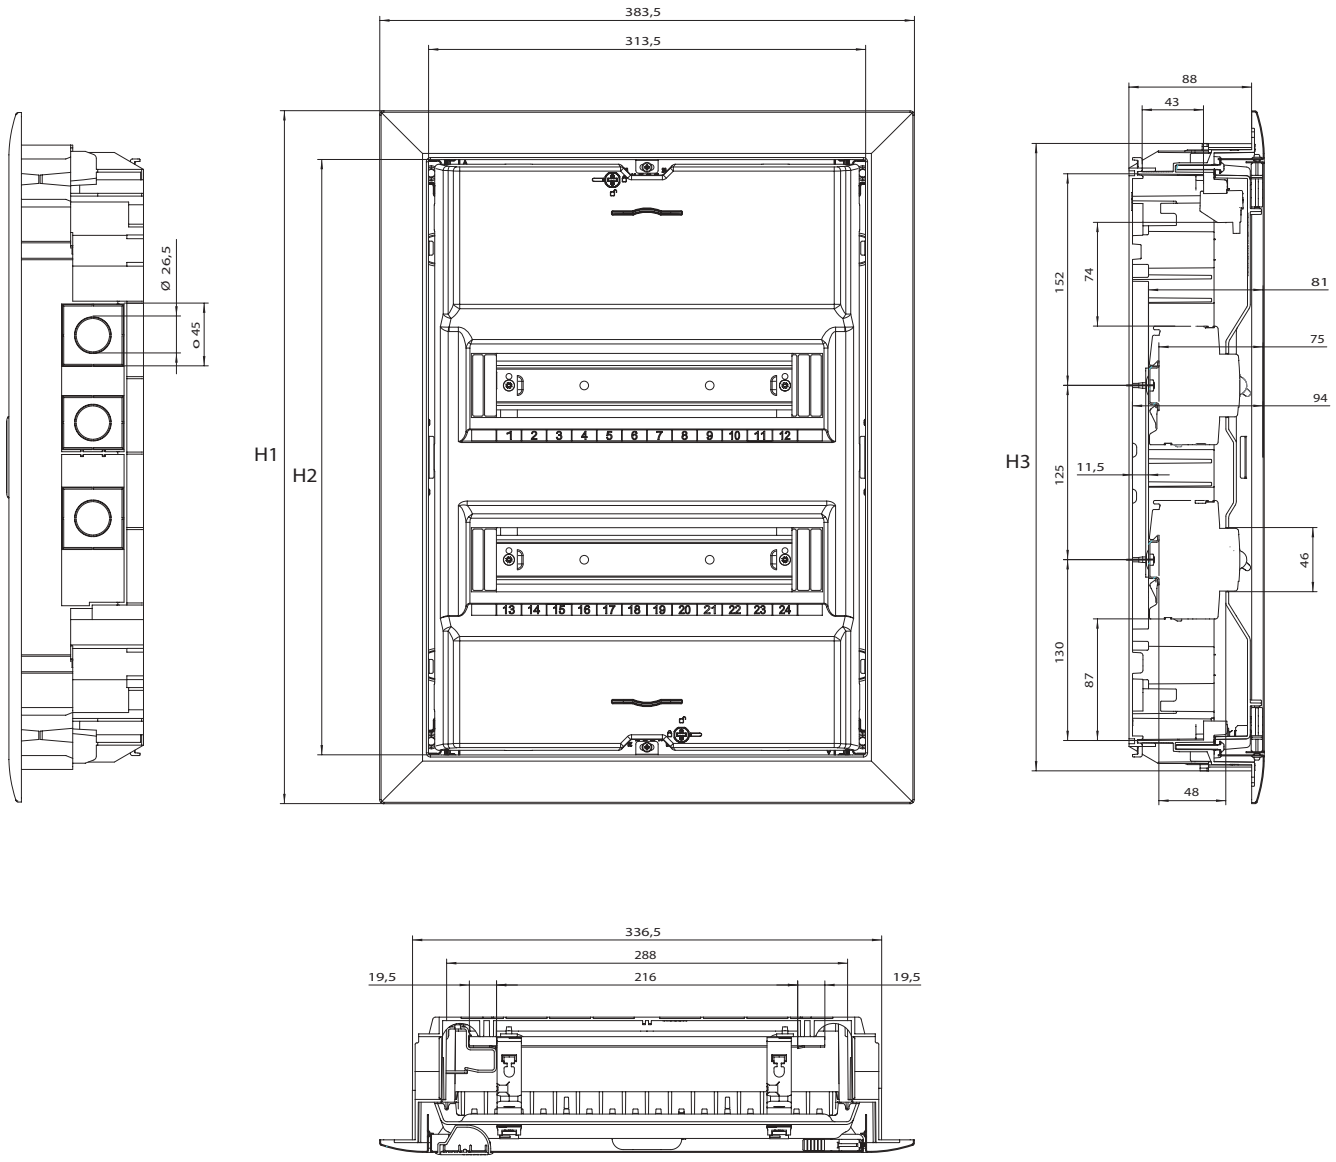

Type	Allowed power loss Pzul according to DIN 43671 (W)			Max. output capacity P de in accordance with DIN VDE 60670-24 (W)			Dimensions in mm		
	20K	25K	30K	20K	25K	30K	H1	H2	H3
UK61..	10.0	13.0	16.0	27.8	34.1	41.0	372	302	325
UK62..	11.5	15.0	19.0	38.0	46.5	56.0	497	427	450
UK63..	14.5	19.0	24.0	40.7	49.8	60.0	622	552	575
UK64..	16.5	21.5	27.0	47.7	58.8	71.0	747	677	700
UK66..				56.0	69.0	83.0	872	802	825

Quick product references

Overall dimensions

UK600 Flush-mounting series – Media enclosure

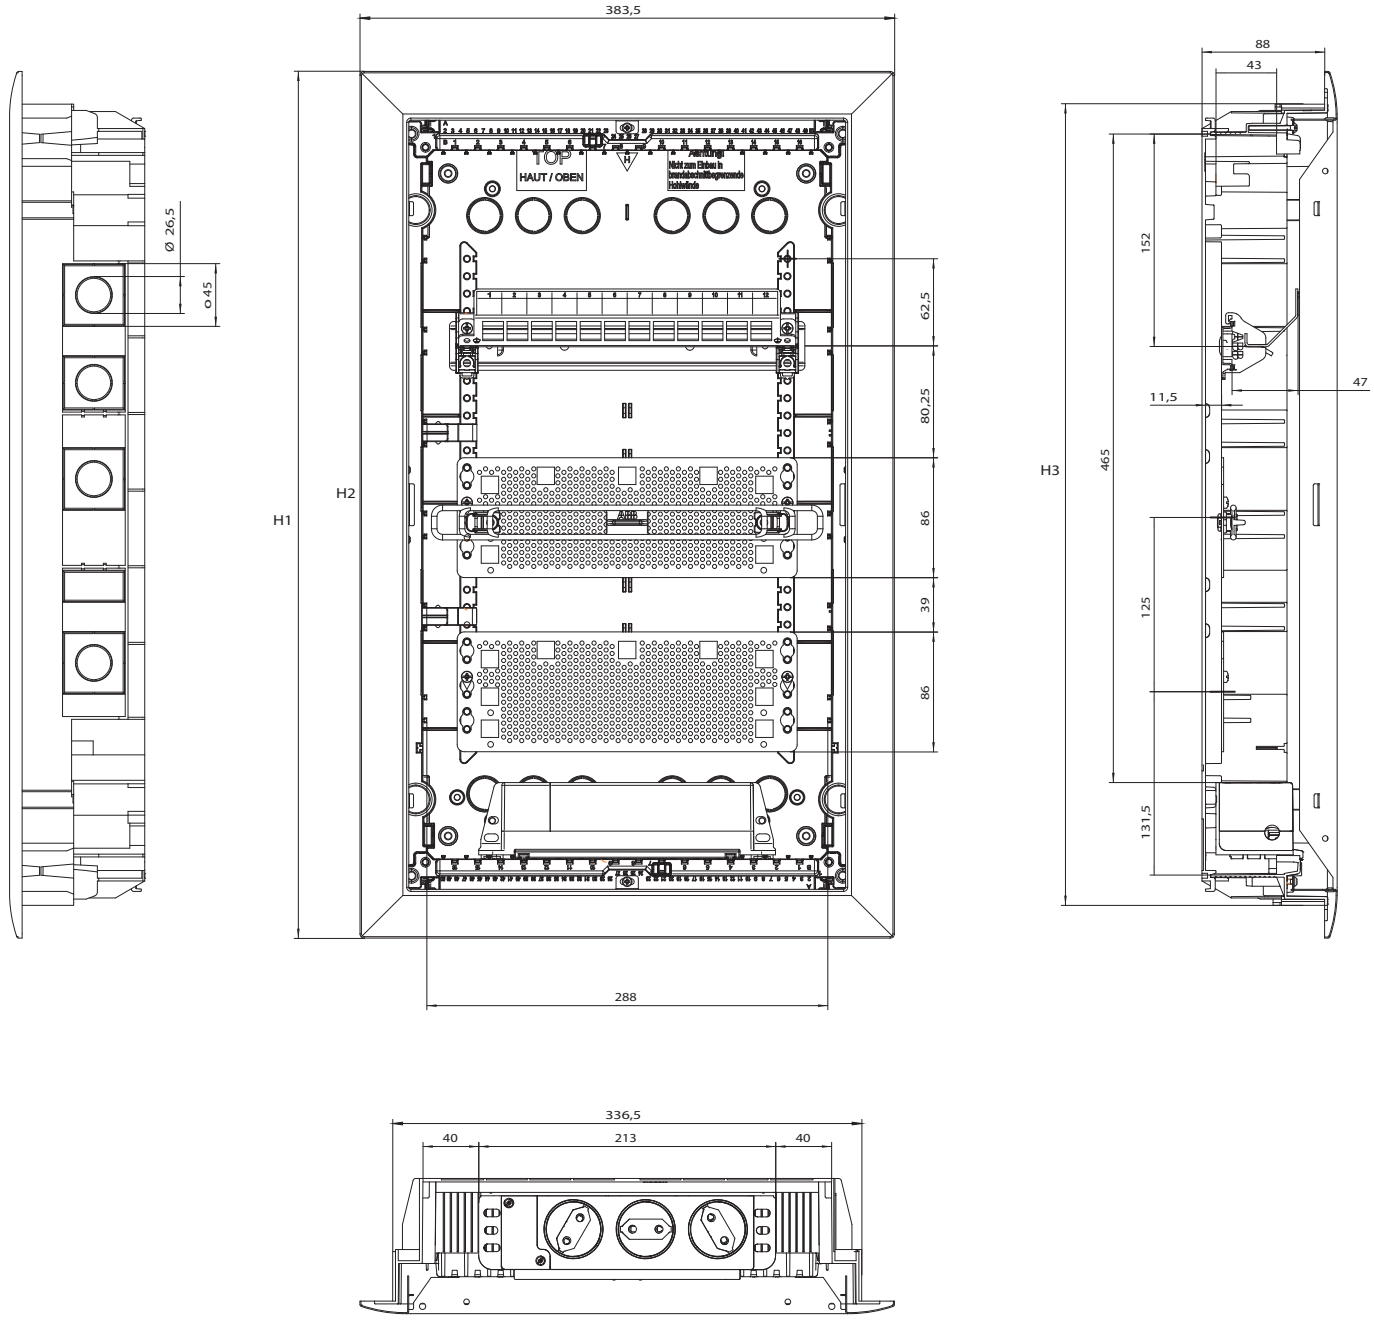

Type	Allowed power loss Pzul according to DIN 43671 (W)			Max. output capacity P de in accordance with DIN VDE 60670-24 (W)			Dimensions in mm		
	20K	25K	30K	20K	25K	30K	H1	H2	H3
UK62..	11.5	15.0	19.0	38.0	46.5	56.0	497	427	450
UK63..	14.5	19.0	24.0	40.7	49.8	60.0	622	552	575
UK64..	16.5	21.5	27.0	47.7	58.8	71.0	747	677	700
UK66..				56.0	69.0	83.0	872	802	825

Quick product references

Overall dimensions

UK600 Flush-mounting series – Combi enclosure

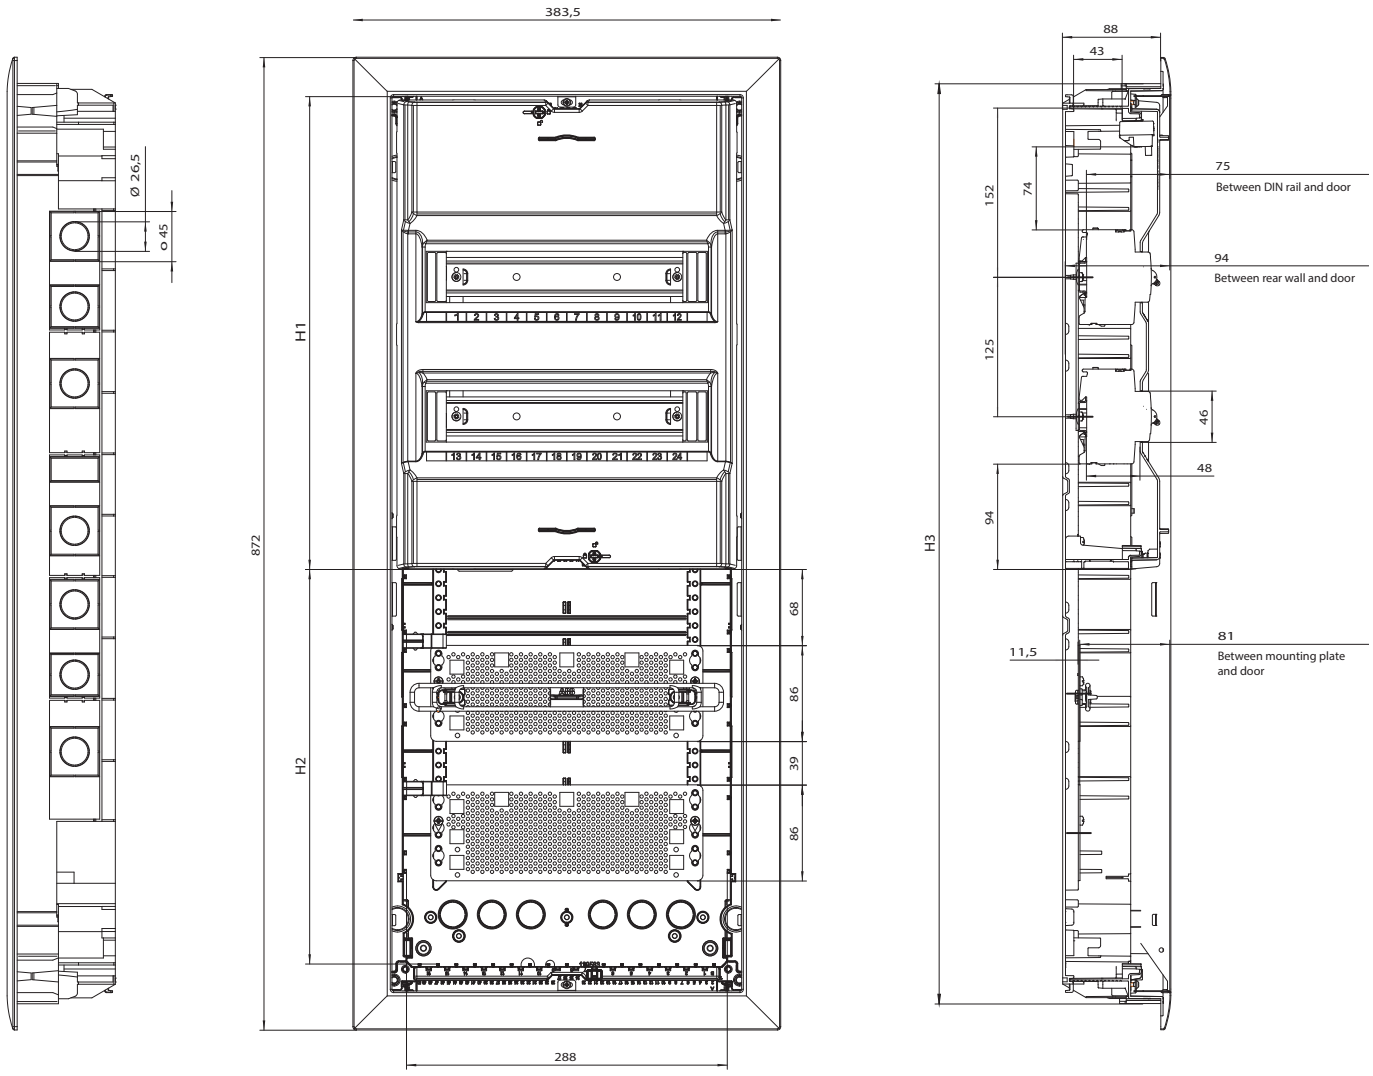

Type	Allowed power loss Pzul according to DIN 43671 (W)			Max. output capacity P de in accordance with DIN VDE 60670-24 (W)			Dimensions in mm	
	20K	25K	30K	20K	25K	30K	H1	H2
UK662..				56.0	69.0	83.0	424	353
UK663..				56.0	69.0	83.0	549	228

Quick product references

Overall dimensions

UK600 Flush-mounting series – Trim frame and door

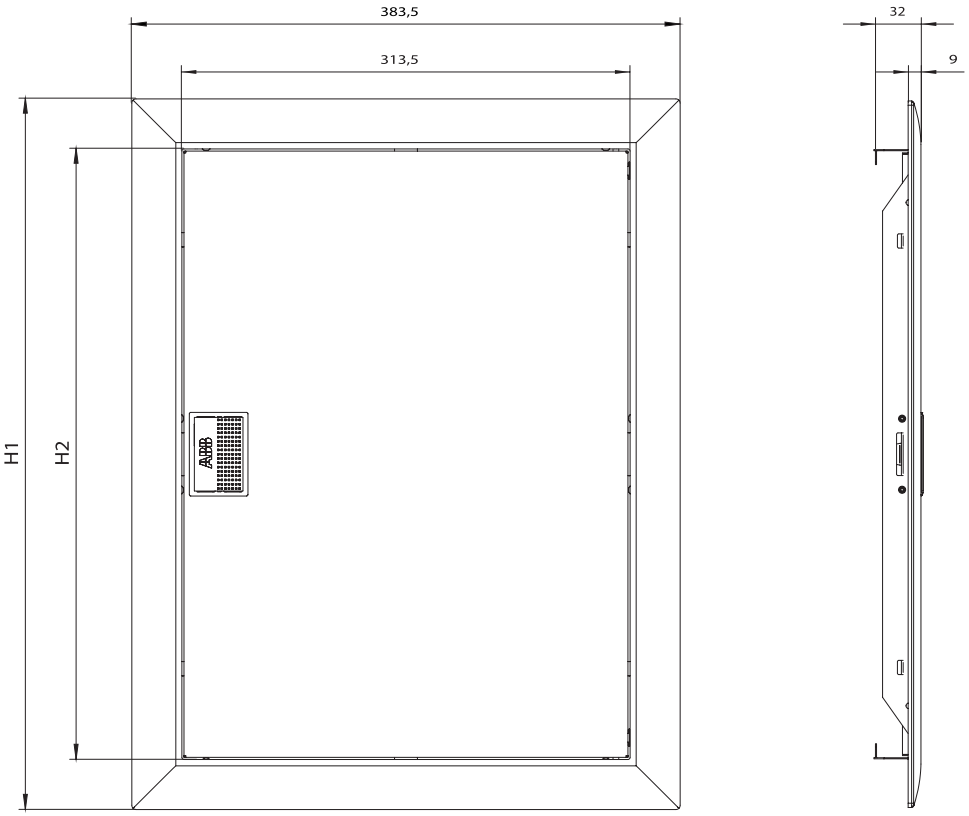

	Dimensions in mm	
Type	**H1**	**H2**
BL610	**302**	**372**
BL620	497	427
BL630	622	552
BL630	622	552
BL640	747	677
BL650	872	802

Quick product references

Overall dimensions

UK600 Flush-mounting series – Interchangeable design frame

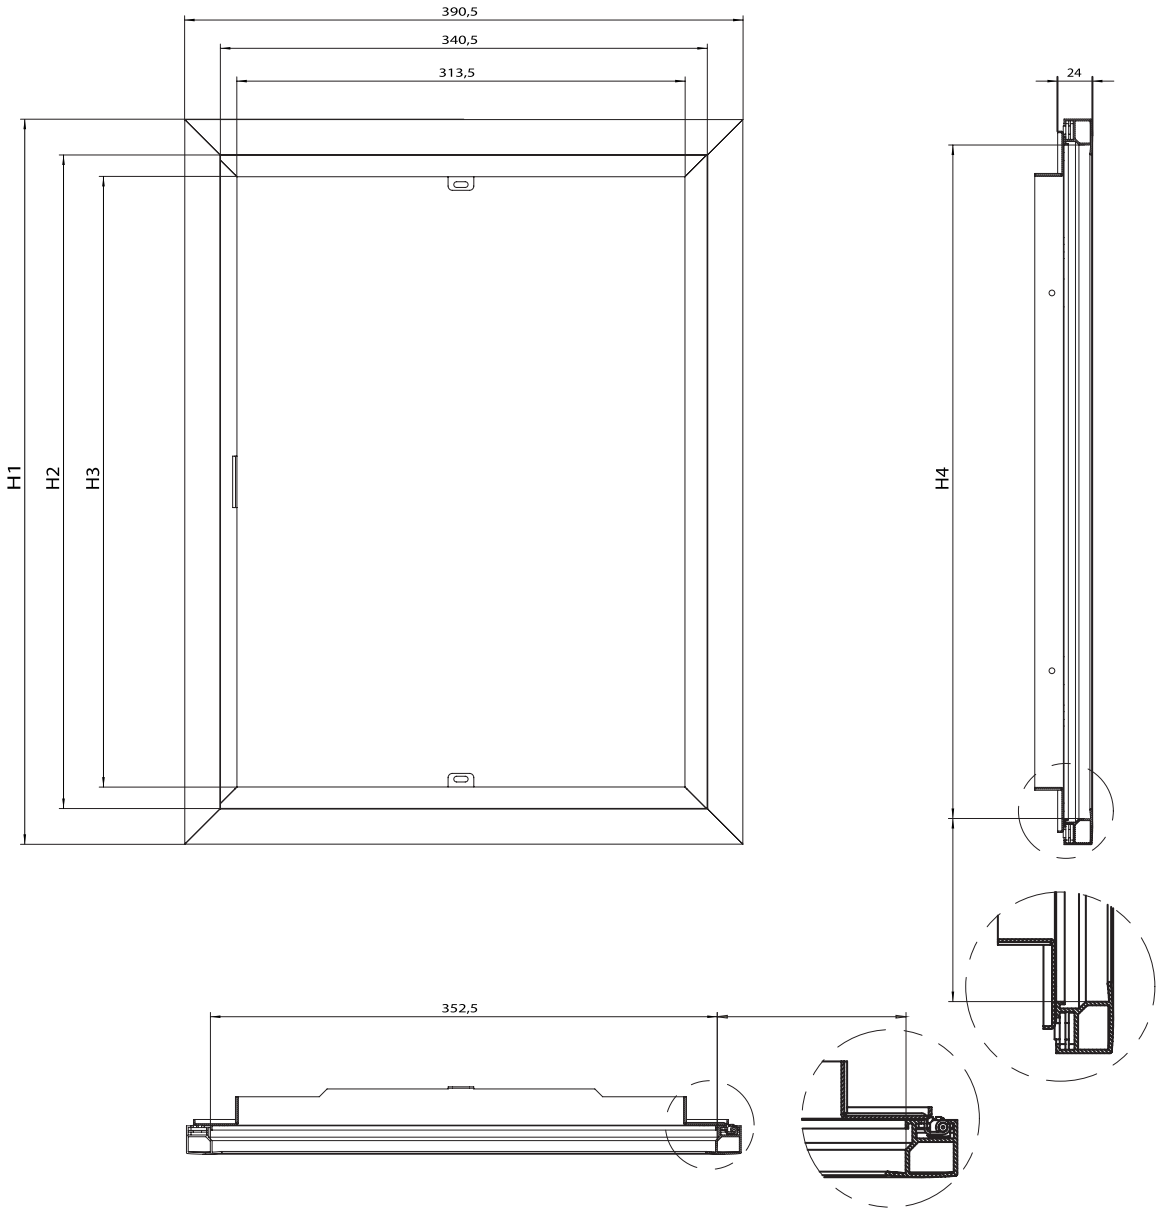

	Dimensions in mm				Technical specifications LED panel			
Type	**H1**	**H2**	**H3**	**H4**	**Type**	**U**	**P**	**Colour temperature**
BL520D	507	457	427	469	UZD624	12V DC	9.60 W	4200 K
BL630D	632	582	552	594	UZD634	12V DC	13.20W	4200 K
BL640D	757	707	677	719	UZD644	12V DC	15.60W	4200 K
BL650D	882	832	802	844	UZD654	12V DC	19.60W	4200 K

Quick product references

Overall dimensions

System pro E comfort MISTRAL41F

Box	
Modules	**diam. 32**
4M	4
6M	4
8M	4
12M	4
18M	4
24M	8
36M – 2F	8
36M – 3F	12
48M	16
54M	12
72M	16

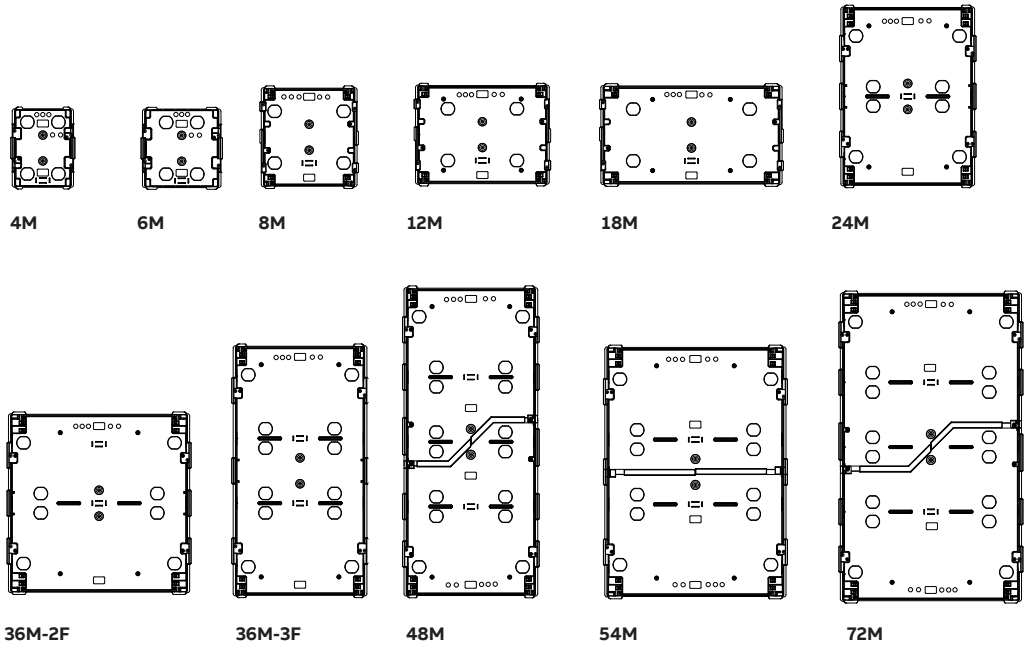

Site	
Modules	**diam. 32**
4M	1
6M	1
8M	1
12M	1
18M	1
24M	3
36M – 2F	3
36M – 3F	4
48M	5
54M	4
72M	5

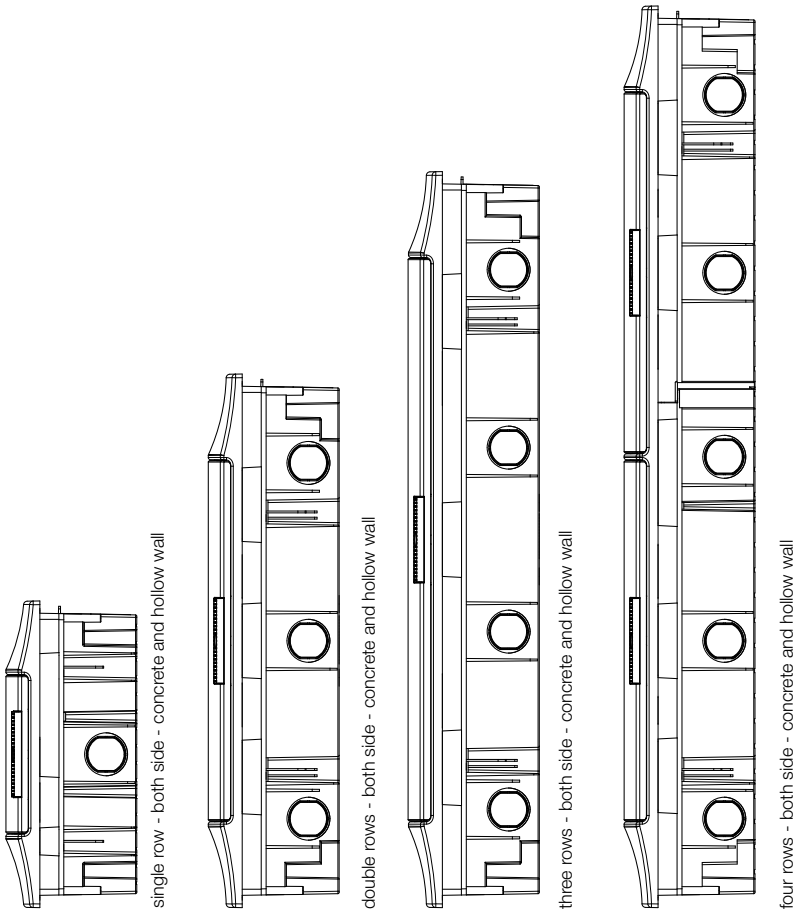

Quick product references

Overall dimensions

Hollow wall holes dimensions

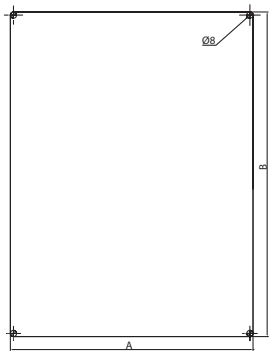

	A	B
4 M	143	183
6 M	183	183
8 M	223	231
12 M	311	231
18 M	421	231
24 M	311	416
36M - 2F	421	416
36M - 3F	311	581
48 M	311	716
54 M	421	581
72 M	421	716

Cable entry					
Modules	**diam. 40**	**diam. 32**	**diam. 25**	**diam. 20**	**Flange**
4	-	-	3	3	///
6	-	-	5	5	///
8	-	1	9	-	150x55
12	1	8	4	-	240x55
18	1	12	2	-	330x55



4 modules - top and bottom - concrete and hollow wall



6 modules - top and bottom - concrete and hollow wall

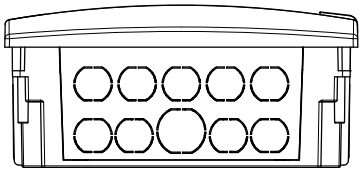

8 modules - top and bottom - hollow wall

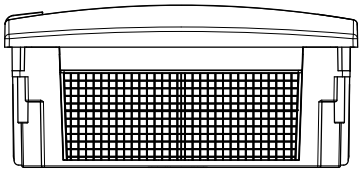

8 modules - top and bottom - concrete wall

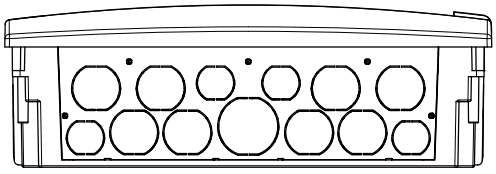

12 modules - top and bottom - hollow wall

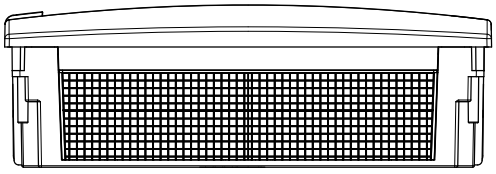

12 modules - top and bottom - concrete wall

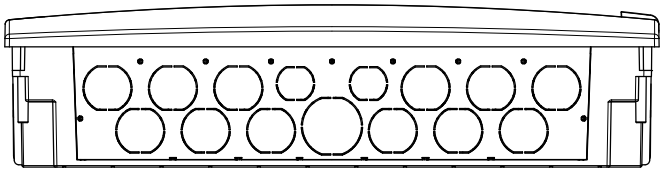

18 modules - top and bottom - hollow wall

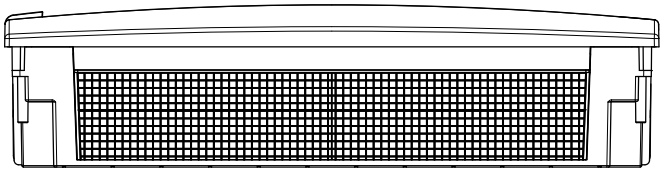

18 modules - top and bottom - concrete wall

Quick product references

Overall dimensions

System pro E comfort MISTRAL41F

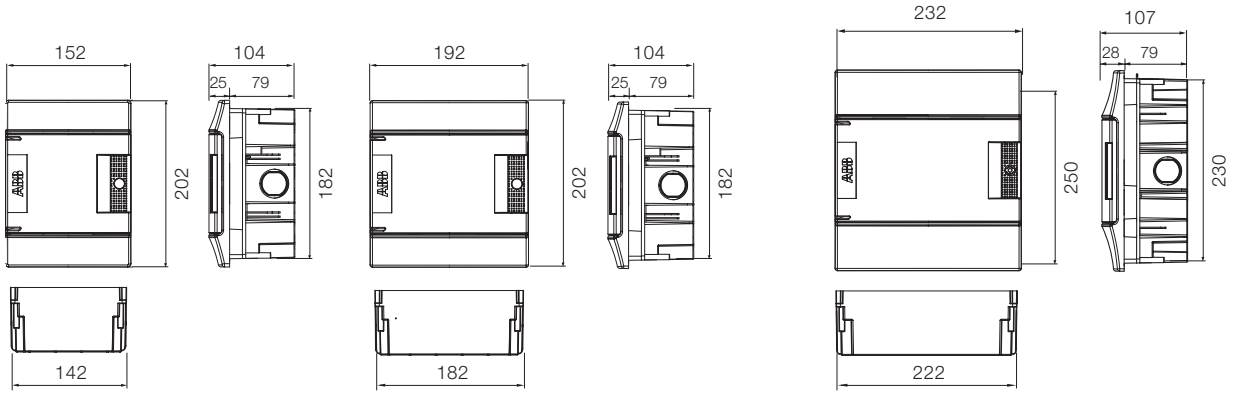

4 modules

6 modules

8 modules

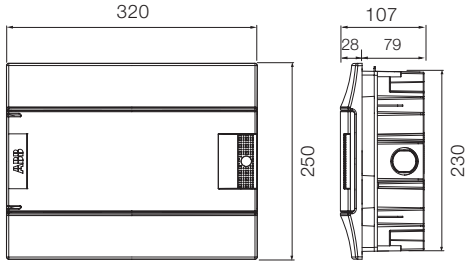

12 modules

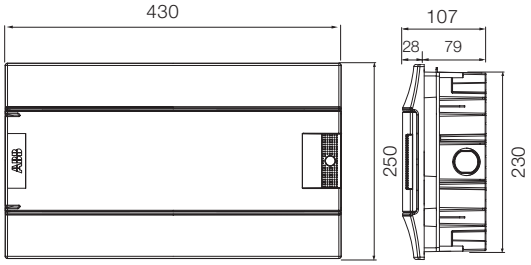

18 modules

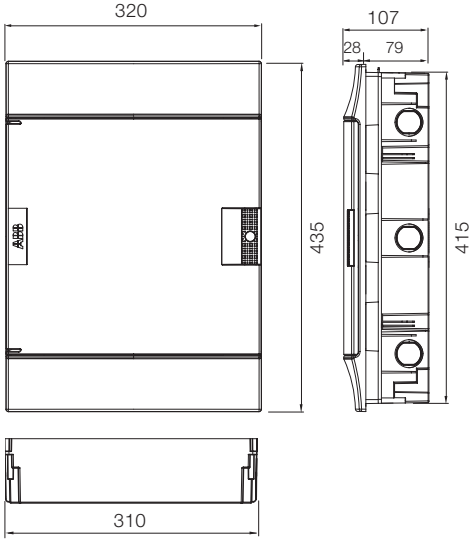

24 modules

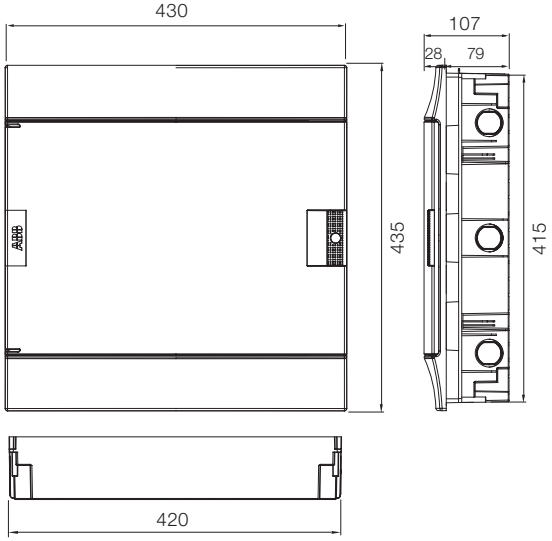

36 modules

Quick product references

Overall dimensions

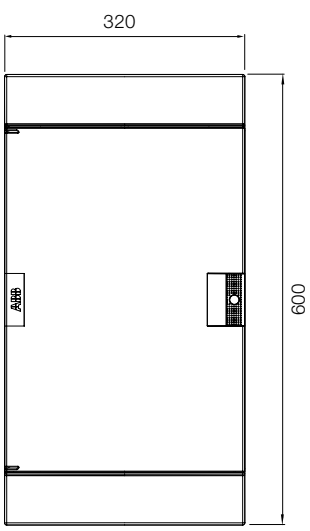

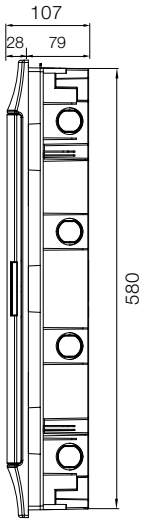

36 modules

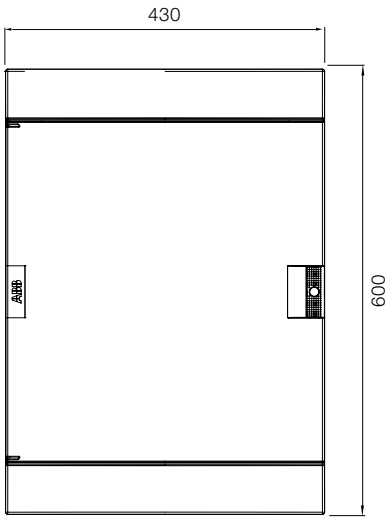

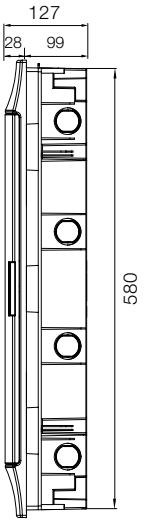

54 modules

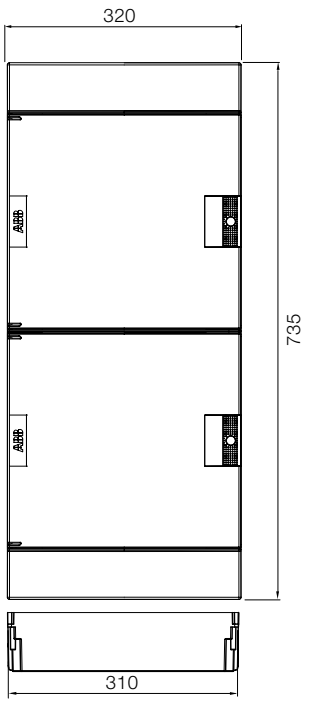

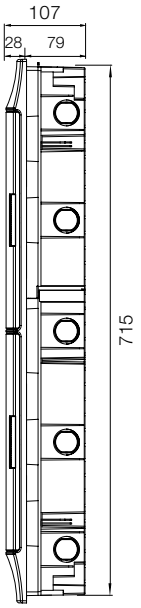

48 modules

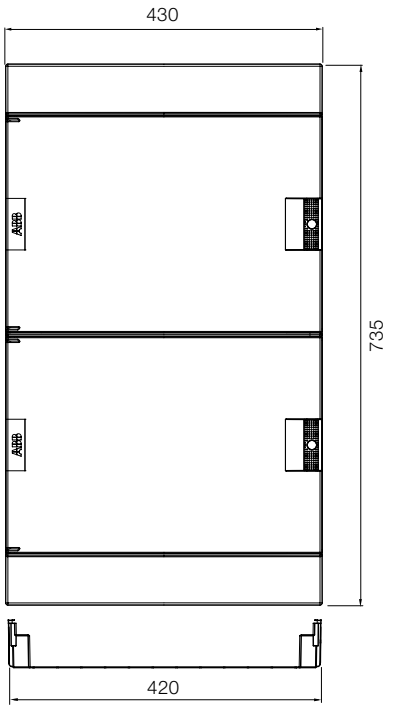

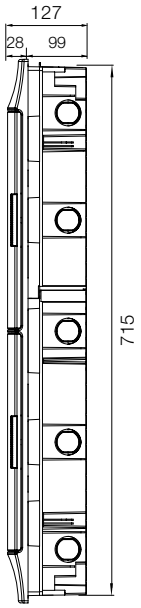

72 modules

Quick product references

Overall dimensions

System pro E comfort MISTRAL41W



1 module



4 modules

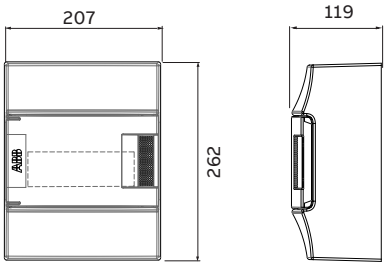

8 modules



12 modules

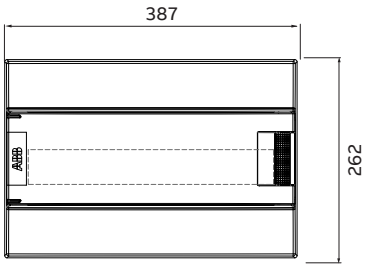

18 modules



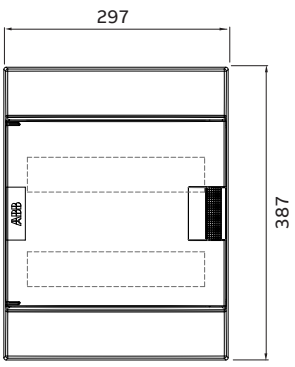

24 modules

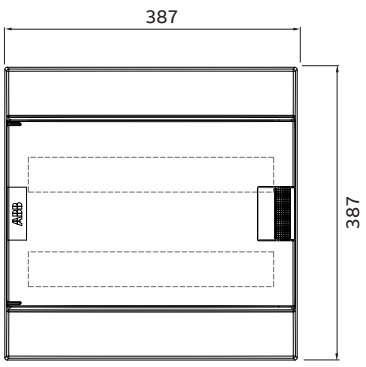

36 modules

Quick product references

Overall dimensions

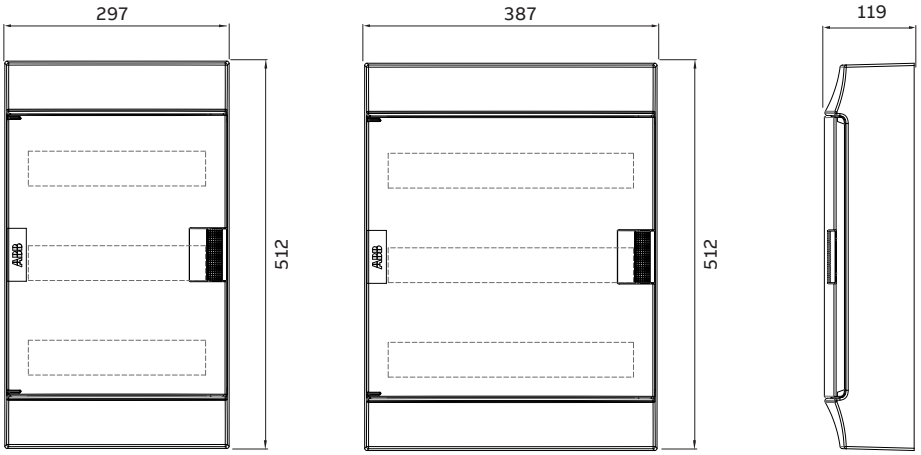

36 modules **54 modules**

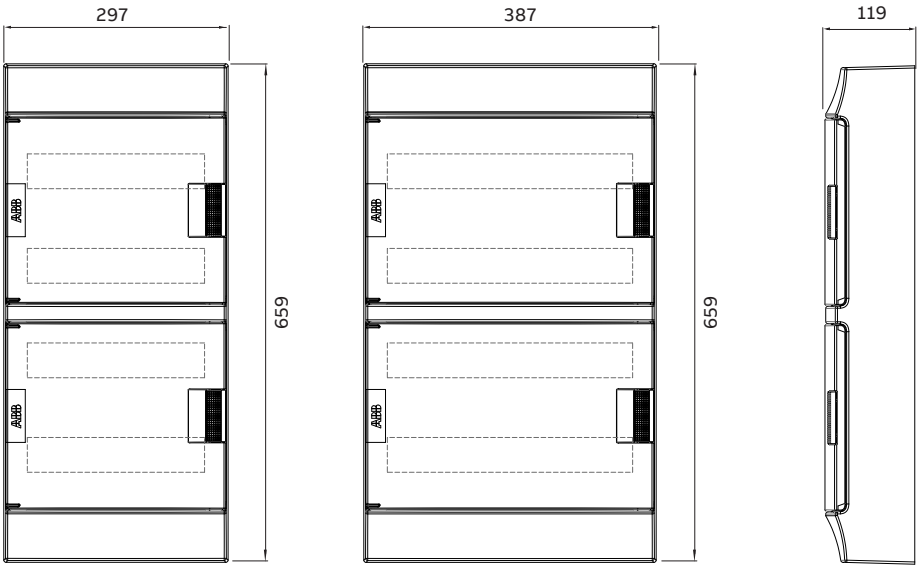

48 modules **72 modules**

Quick product references

Overall dimensions

System pro E comfort MISTRAL41W

Consumer unit fixing template System pro E comfort MISTRAL41W

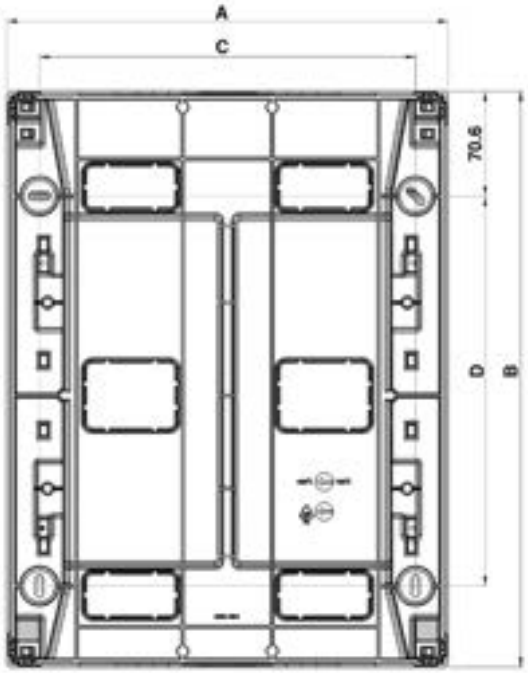

	A	B	C	D
8 Modules	206,5	262	163	137
12 Modules	297	262	253	137
18 Modules	387	262	343	137
24 Modules	297	387	253	262
36 Modules 18x2	387	387	343	262
36 Modules 12x3	297	512	253	387
48 Modules	297	659	253	518
54 Modules	387	512	343	387
72 Modules	387	659	343	518

Quick product references

Overall dimensions

System pro E comfort MISTRAL65

Cable gland table

		Cable Glands		
Modules		**diam. 16**	**diam. 20**	**diam. 25**
4	04x1	2	-	-
8	08x1	3	3	-
12	12x1	2	2	2
24	12x2	5	5	2
36	12x3	5	5	2
48	12x4	5	5	2
18	18x1	2	2	2
36	18x2	5	5	2
54	18x3	5	5	2
72	18x4	5	5	2

		Holes				
Modules		**diam. 12**	**diam. 16**	**diam. 20**	**diam. 25**	**diam. 32**
4	04x1	4	4	-	-	-
8	08x1	-	6	7	2	-
12	12x1	-	10	7	4	2
24	12x2	-	10	7	4	2
36	12x3	-	10	7	4	2
48	12x4	-	10	7	4	2
18	18x1	-	14	9	4	2
36	18x2	-	14	9	4	2
54	18x3	-	14	9	4	2
72	18x4	-	14	9	4	2



4 modules - top and bottom

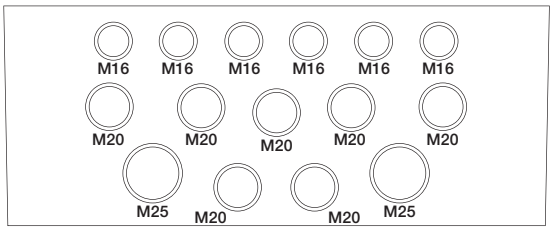

8 modules - top and bottom

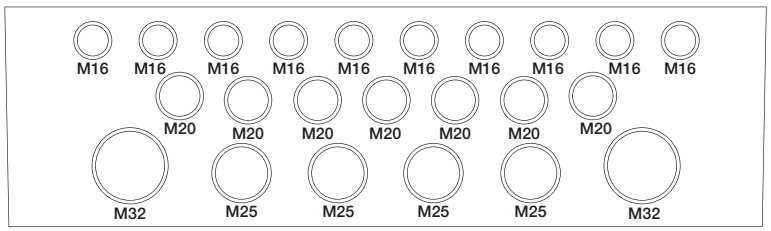

12 modules - top and bottom

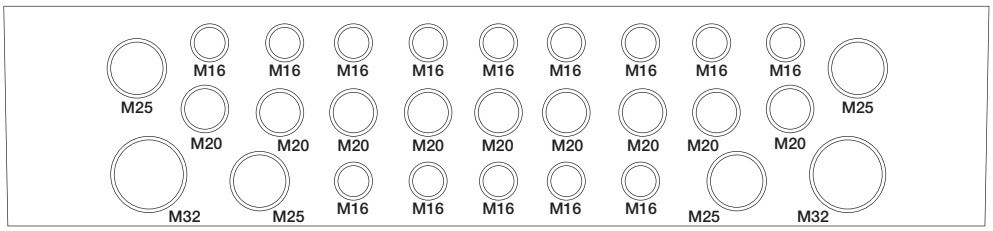

18 modules - top and bottom

Quick product references

Overall dimensions

System pro E comfort MISTRAL65

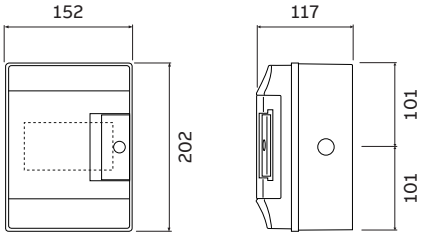

4 modules

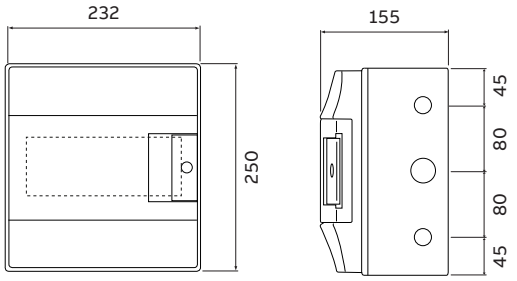

8 modules



12 modules

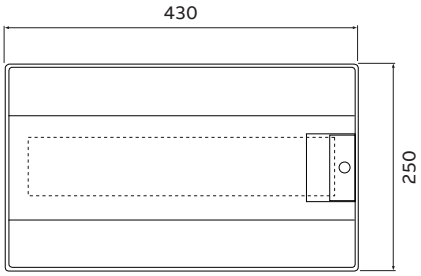

18 modules



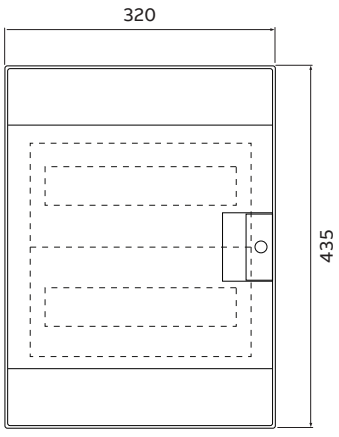

24 modules

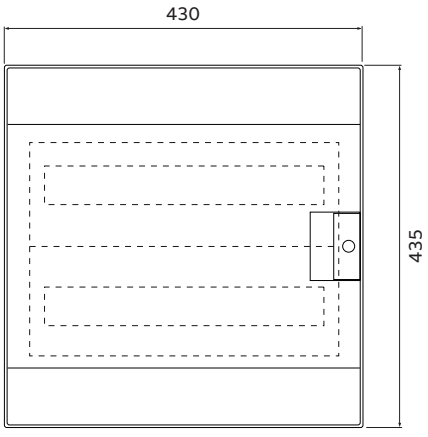

36 modules

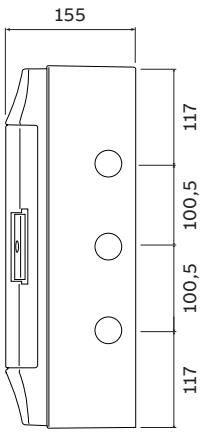

Quick product references

Overall dimensions

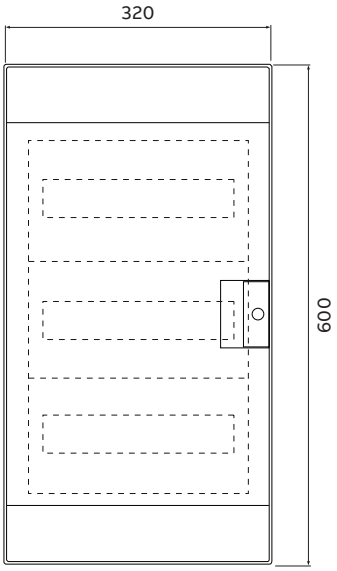

36 modules

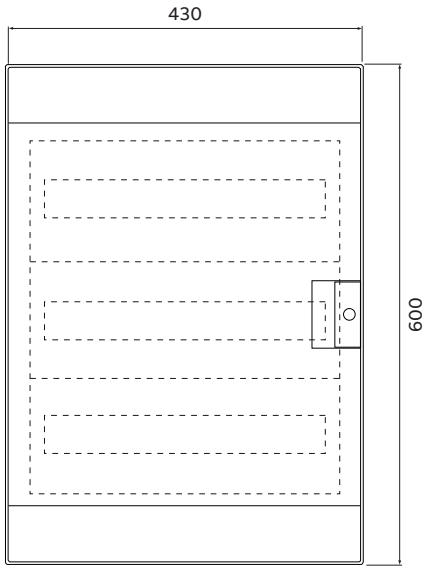

54 modules

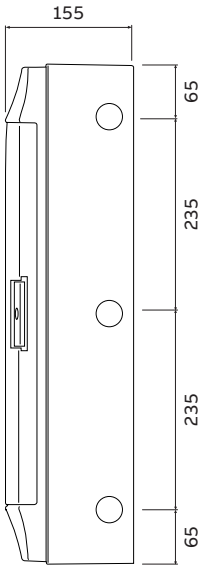

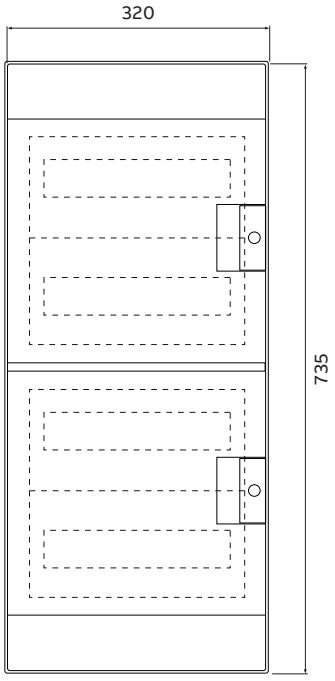

48 modules

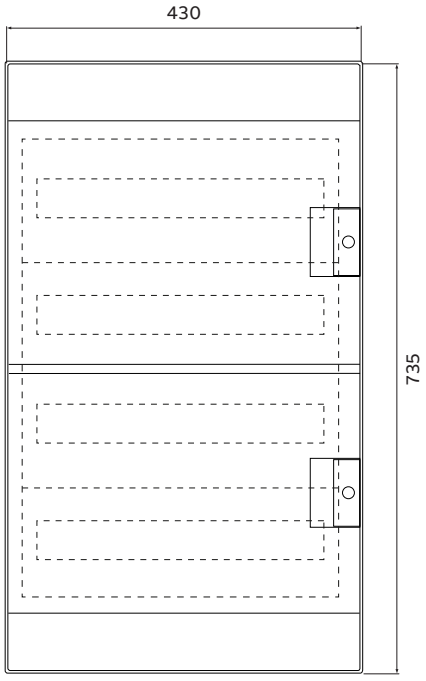

72 modules

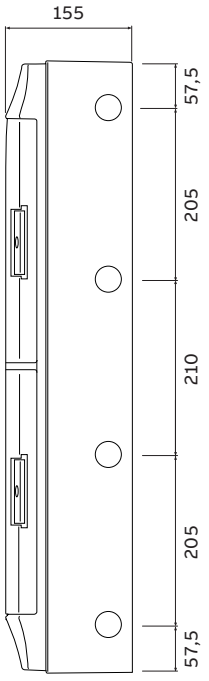

Quick product references

Overall dimensions

System pro E comfort MISTRAL65

Consumer unit fixing template

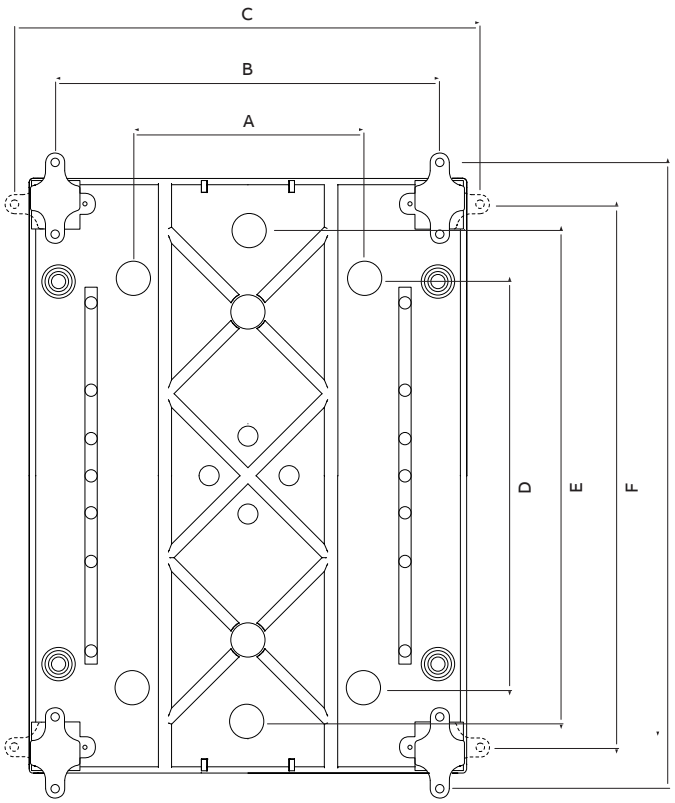

	A	B	C	D	E	F	G
4 Modules		113	173		140	163	223,5
8 Modules	90	194	254,5	180		212	272,5
12 Modules	170	282,5	343	180		212	272,5
18 Modules	280	392	452,5	125	175	212	272,5
24 Modules	170	282,5	343	310	360	397	457,5
36 Modules - 2 F	280	392	452,5	310	360	397	457,5
36 Modules - 3 F	170	282,5	343	475	525	562	622,5
48 Modules	170	282,5	343	610	660	697	757,5
54 Modules	280	392	452,5	475	525	562	622,5
72 Modules	280	392	452,5	610	660	697	757,5

Quick product references

Overall dimensions

AT/U Series

Wall-mounting with door, AT series

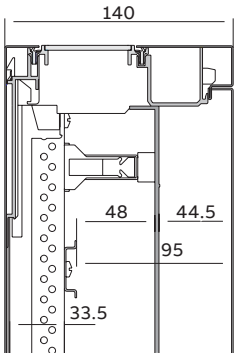

Compact distribution board panel

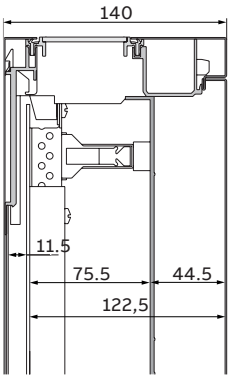

Panel with mounting plate

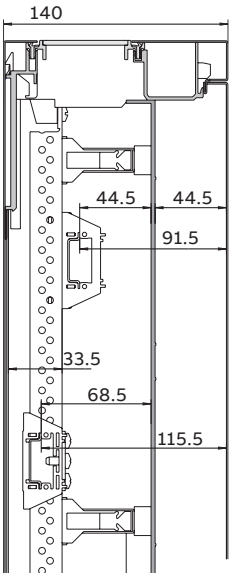

Panel for terminals

Flush-mounting with door, U series

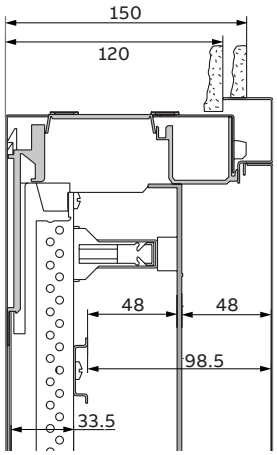

Compact distribution board panel

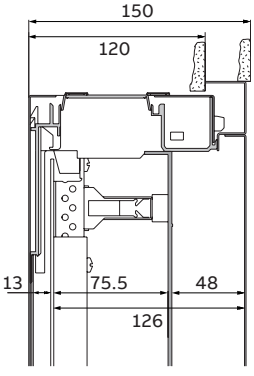

Panel with mounting plate

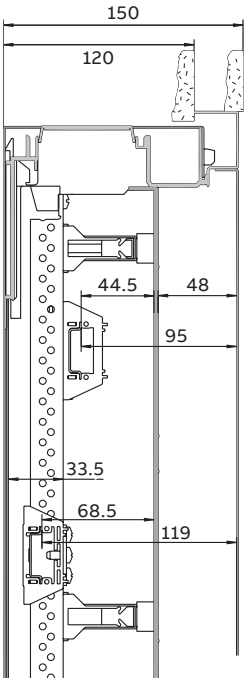

Panel for terminals

Quick product references

Overall dimensions

Compact distribution boards

Type	H	W	H1	W1
AT22E	374	574	235	417
AT31	524	324	385	167
AT32, AT32TE, AT32R2, AT32TR2	524	574	385	417
AT41, AT41TE, AT41R3, AT41TR3	674	324	535	167
AT42, AT42TE, AT42M, AT42/2, AT42R3, AT42TR3	674	574	535	417
AT43, AT43R3, AT43TR3	674	824	535	667
AT51, AT51TE, AT51R4, AT51TR4	824	324	685	167
AT52, AT52TE, AT52K, AT52/2, AT52R4, AT52TR4	824	574	685	417
AT53, AT53M,AT53K, AT53R4, AT53TR4	824	824	685	667
AT54K, AK54E, AT54R4	824	1074	685	917
AT61, AT61TE, AT61R5, AT61TR5	974	324	835	167
AT62, AT62TE, AT62K, AT62R5, AT62TR5	974	574	835	417
AT63E, AT63K, AT63R5, AT63TR5	974	824	835	667
AT64K	974	1074	835	917
AT72, AT72K, AT72R6, AT72TR6	1124	574	985	417
AT73K, AT73R6, AT73TR6	1124	824	985	667

Dimensions in mm

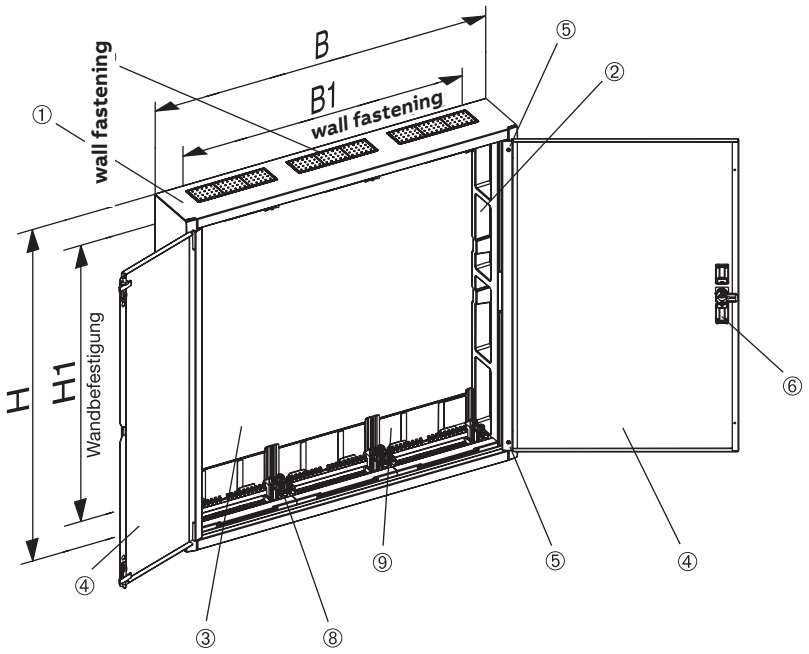

Quick product references

Overall dimensions

Terminal blocks for MISTRAL series

Terminal holders – dimensions

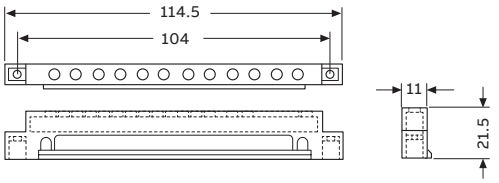

12 539

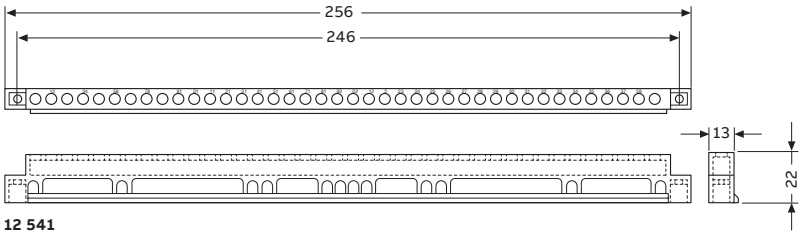

12 541

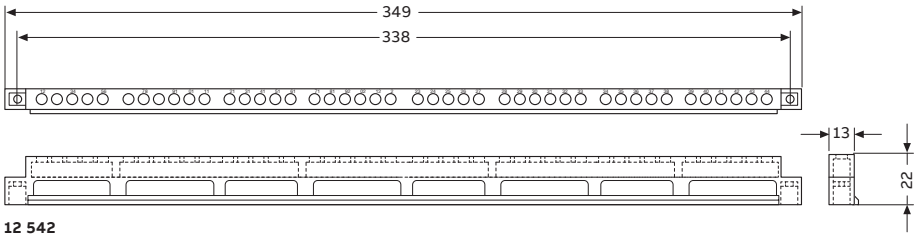

12 542

Quick product references

Overall dimensions

Terminal blocks for MISTRAL series

Terminal bars – dimensions



12 531

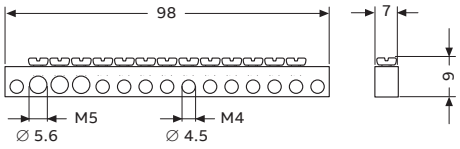

12 532

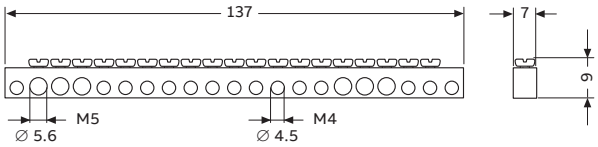

12 533

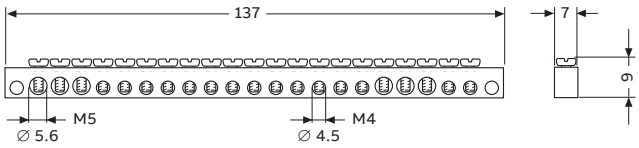

12 534

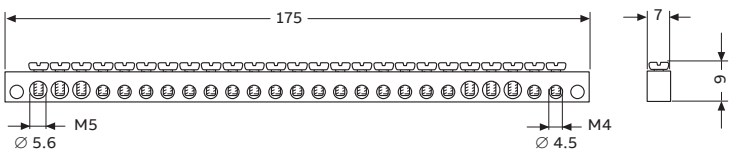

12 535

Quick product references

Overall dimensions

EUROPA65 Series wall-mounting consumer units

Front view



8 modules



12 modules



18 modules



24 modules



36 modules

Side view



8 - 12 modules



18 modules

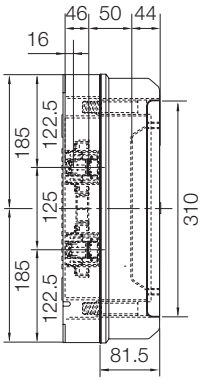

24 -36 modules

Dimensions mm

Quick product references

Overall dimensions

EUROPA65 Series wall-mounting consumer units

Drilling sheets



8 modules



12 modules

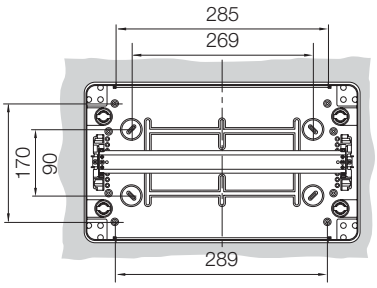

18 modules

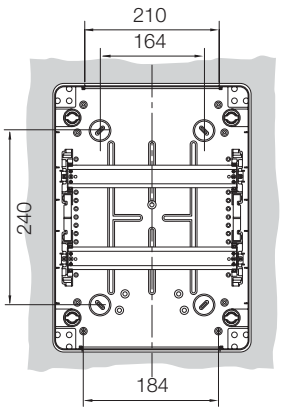

24 modules

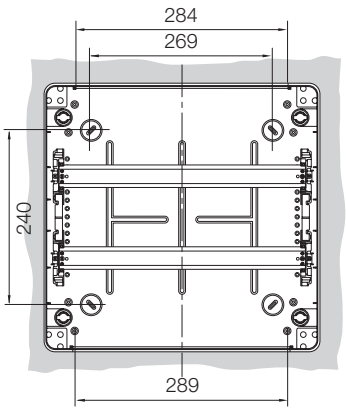

36 modules

Modules	Code
8	1SL2748A01
12	1SL2752A01
18	1SL2753A01
24	1SL2754A01
36	1SL2755A01

Quick product references

Overall dimensions

IP44, IP55 and IP65 junction boxes

Front view



00 800
1SL0900A00



00 802
1SL0901A00



00 808
1SL0902A00



00 810
1SL0903A00



00 820
00 850
1SL0820A00
1SL0850A00
1SL0905A00
1SL0909A00
1SL0920A00
1SL0950A00



00 816	1SL0904A00
00 821	1SL0906A00
00 846	1SL0908A00
00 851	1SL0910A00
1SL0816A00	1SL0916A00
1SL0821A00	1SL0921A00
1SL0846A00	1SL0946A00
1SL0851A00	1SL0951A00



00 822	1SL0907A00
00 852	1SL0911A00
00 872	1SL0912A00
1SL0822A00	1SL0922A00
1SL0852A00	1SL0972A00
1SL0872A00	1SL0985A00



1SL0824A00	1SL0924A00
1SL0830A00	1SL0930A00
1SL0854A00	1SL0954A00
1SL0860A00	1SL0960A00
1SL0874A00	1SL0974A00
1SL0880A00	1SL0980A00

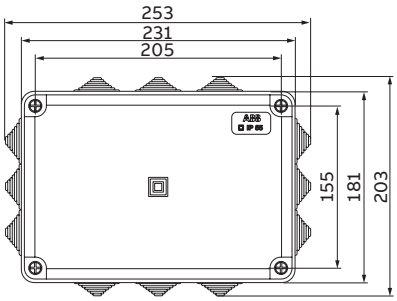

1SL0826A00	1SL0926A00
1SL0832A00	1SL0932A00
1SL0856A00	1SL0956A00
1SL0862A00	1SL0962A00
1SL0876A00	1SL0976A00
1SL0884A00	1SL0984A00

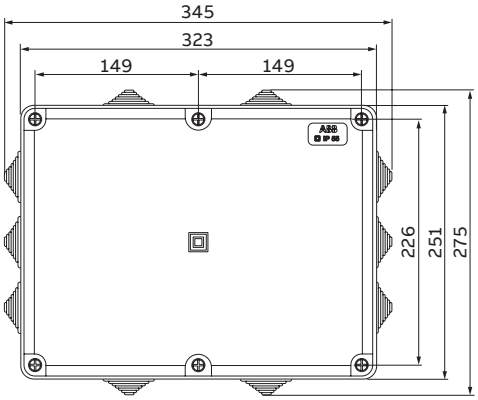

1SL0828A00	1SL0928A00
1SL0834A00	1SL0934A00
1SL0858A00	1SL0958A00
1SL0864A00	1SL0964A00
1SL0878A00	1SL0978A00
1SL0884A00	1SL0984A00

Quick product references

Overall dimensions

IP44, IP55 and IP65 junction boxes

Side view



00 800
1SL0900A00



00 802
1SL0901A00



00 808
1SL0902A00



00 810
1SL0903A00



00 820
00 850
1SL0820A00
1SL0850A00
1SL0905A00
1SL0909A00
1SL0920A00
1SL0950A00



00 816
00 846
1SL0816A00
1SL0846A00
1SL0904A00
1SL0908A00
1SL0916A00
1SL0921A00
1SL0946A00



00 821
00 851
1SL0821A00
1SL0851A00
1SL0906A00
1SL0910A00
1SL0921A00
1SL0951A00



00 822
00 852
00 872
1SL0822A00
1SL0852A00
1SL0872A00
1SL0907A00
1SL0911A00
1SL0912A00
1SL0922A00
1SL0952A00
1SL0972A00



1SL0824A00
1SL0854A00
1SL0874A00
1SL0924A00
1SL0954A00
1SL0974A00



1SL0826A00
1SL0856A00
1SL0876A00
1SL0926A00
1SL0956A00
1SL0976A00

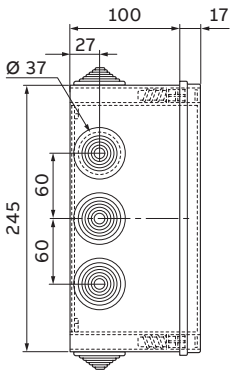

1SL0828A00
1SL0858A00
1SL0878A00
1SL0928A00
1SL0958A00
1SL0978A00



1SL0830A00 1SL0930A00
1SL0860A00 1SL0960A00
1SL0880A00 1SL0980A00



1SL0832A00 1SL0932A00
1SL0862A00 1SL0962A00
1SL0882A00 1SL0982A00



1SL0834A00 1SL0934A00
1SL0864A00 1SL0964A00
1SL0884A00 1SL0984A00

Quick product references

Overall dimensions

Drilling sheets and internal dimensions



00 800
00 581
1SL0900A00
1SL0910A00



00 802
1SL0901A00



00 808
1SL0902A00



00 810
1SL0903A00



00 820 1SL0905A00
00 850 1SL0909A00
1SL0820A00 1SL0920A00
1SL0850A00 1SL0950A00



00 816 1SL0904A00
00 846 1SL0908A00
1SL0816A00 1SL0916A00
1SL0846A00 1SL0946A00



00 821 1SL0906A00
00 851 1SL0910A00
1SL0821A00 1SL0921A00
1SL0851A00 1SL0951A00



00 822 1SL0907A00
00 852 1SL0911A00
00 872 1SL0912A00
1SL0822A00 1SL0922A00
1SL0852A00 1SL0952A00
1SL0872A00 1SL0972A00



1SL0830A00 1SL0924A00
1SL0824A00 1SL0930A00
1SL0874A00 1SL0954A00
1SL0854A00 1SL0960A00
1SL0860A00 1SL0974A00
1SL0880A00 1SL0980A00

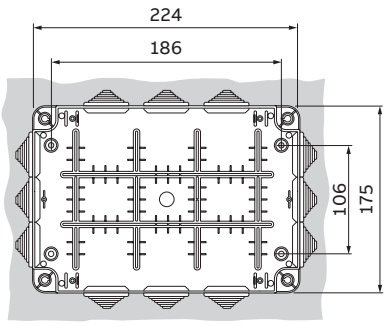

1SL0826A00 1SL0926A00
1SL0832A00 1SL0932A00
1SL0876A00 1SL0956A00
1SL0856A00 1SL0962A00
1SL0862A00 1SL0976A00
1SL0884A00 1SL0984A00

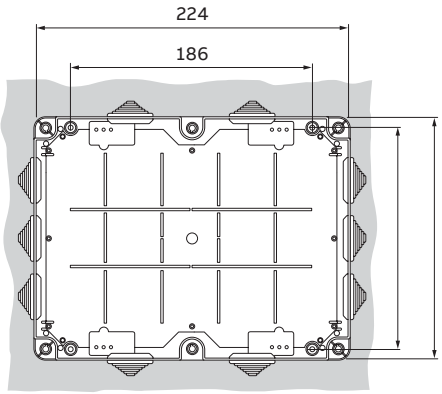

1SL0828A00 1SL0928A00
1SL0834A00 1SL0934A00
1SL0878A00 1SL0958A00
1SL0858A00 1SL0964A00
1SL0864A00 1SL0978A00
1SL0884A00 1SL0984A00

Quick product references

Overall dimensions

TwinLine S 43

Front view
Wall-mounting and floor-standing cabinet
External/internal dimensions

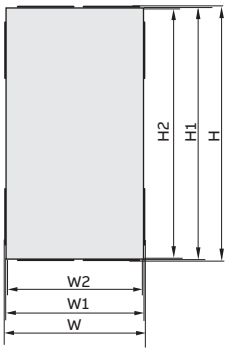

Front view
Wall-mounting cabinet
Wall fastening dimensions



Front view
Floor-standing cabinet
Wall fastening dimensions

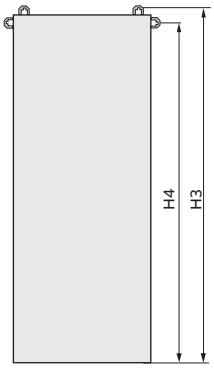

Front view
External fastening
Detail

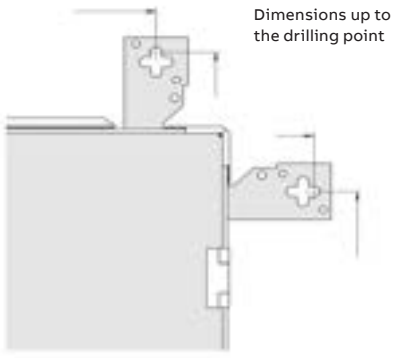

Cabinet types H x W x D	External dimensions in mm			Internal dimensions in mm		External dimensions with embossing in mm		Wall fastening dimensions in mm			
	H1	W1	D1	H2	W2	H	W	H3	W3	H4	W4
400 x 300 x 225	450	390	225	402	342	454	394	578.5	518.5	345	285
600 x 300 x 225	650	390	225	602	342	654	394	778.5	518.5	545	285
800 x 300 x 225	850	390	225	802	342	854	394	978.5	518.5	745	285
1000 x 300 x 225	1050	390	225	1002	342	1054	394	1178.5	518.5	945	285
1200 x 300 x 225	1250	390	225	1202	342	1254	394	1378.5	518.5	1145	285
1400 x 300 x 225	1450	390	225	1402	342	1454	394	1514	518.5	1292.5	285
1600 x 300 x 225	1650	390	225	1602	342	1654	394	1714	518.5	1492.5	285
1800 x 300 x 225	1850	390	225	1802	342	1854	394	1914	518.5	1692.5	285
2000 x 300 x 225	2050	390	225	2002	342	2054	394	2114	518.5	1892.5	285
400 x 600 x 225	450	660	225	402	612	454	664	578.5	788.5	345	555
600 x 600 x 225	650	660	225	602	612	654	664	778.5	788.5	545	555
800 x 600 x 225	850	660	225	802	612	854	664	978.5	788.5	745	555
1000 x 600 x 225	1050	660	225	1002	612	1054	664	1178.5	788.5	945	555
1200 x 600 x 225	1250	660	225	1202	612	1254	664	1378.5	788.5	1145	555
1400 x 600 x 225	1450	660	225	1402	612	1454	664	1514	788.5	1292.5	555
1600 x 600 x 225	1650	660	225	1602	612	1654	664	1714	788.5	1492.5	555
1800 x 600 x 225	1850	660	225	1802	612	1854	664	1914	788.5	1692.5	555
2000 x 600 x 225	2050	660	225	2002	612	2054	664	2114	788.5	1892.5	555
400 x 800 x 225	450	875	225	402	827	454	879	578.5	1003.5	345	770
600 x 800 x 225	650	875	225	602	827	654	879	778.5	1003.5	545	770
800 x 800 x 225	850	875	225	802	827	854	879	978.5	1003.5	745	770
1000 x 800 x 225	1050	875	225	1002	827	1054	879	1178.5	1003.5	945	770
1200 x 800 x 225	1250	875	225	1202	827	1254	879	1378.5	1003.5	1145	770
1400 x 800 x 225	1450	875	225	1402	827	1454	879	1514	1003.5	1292.5	770
1600 x 800 x 225	1650	875	225	1602	827	1654	879	1714	1003.5	1492.5	770
1800 x 800 x 225	1850	875	225	1802	827	1854	879	1914	1003.5	1692.5	770
2000 x 800 x 225	2050	875	225	2002	827	2054	879	2114	1003.5	1892.5	770

Quick product references

Overall dimensions

TwinLine S 43

Front view
Wall-mounting and floor-standing cabinet
External/internal dimensions

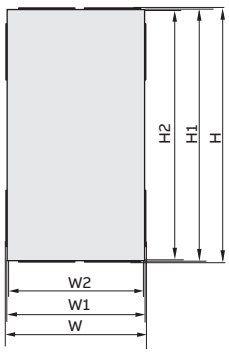

Front view
Wall-mounting cabinet
Wall fastening dimensions



Front view
Floor-standing cabinet
Wall fastening dimensions

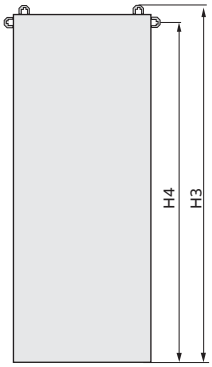

Front view
External fastening
Detail

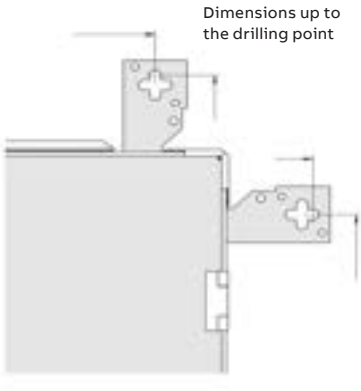

Cabinet types H x W x D	External dimensions in mm			Internal dimensions in mm		External dimensions with embossing in mm		Wall fastening dimensions in mm			
	H1	W1	D1	H2	W2	H	W	H3	W3	H4	W4
400 x 300 x 275	450	390	275	402	342	454	394	578.5	518.5	345	285
600 x 300 x 275	650	390	275	602	342	654	394	778.5	518.5	545	285
800 x 300 x 275	850	390	275	802	342	854	394	978.5	518.5	745	285
1000 x 300 x 275	1050	390	275	1002	342	1054	394	1178.5	518.5	945	285
1200 x 300 x 275	1250	390	275	1202	342	1254	394	1378.5	518.5	1145	285
1400 x 300 x 275	1450	390	275	1402	342	1454	394	1514	518.5	1292.5	285
1600 x 300 x 275	1650	390	275	1602	342	1654	394	1714	518.5	1492.5	285
1800 x 300 x 275	1850	390	275	1802	342	1854	394	1914	518.5	1692.5	285
2000 x 300 x 275	2050	390	275	2002	342	2054	394	2114	518.5	1892.5	285
400 x 600 x 275	450	660	275	402	612	454	664	578.5	788.5	345	555
600 x 600 x 275	650	660	275	602	612	654	664	778.5	788.5	545	555
800 x 600 x 275	850	660	275	802	612	854	664	978.5	788.5	745	555
1000 x 600 x 275	1050	660	275	1002	612	1054	664	1178.5	788.5	945	555
1200 x 600 x 275	1250	660	275	1202	612	1254	664	1378.5	788.5	1145	555
1400 x 600 x 275	1450	660	275	1402	612	1454	664	1514	788.5	1292.5	555
1600 x 600 x 275	1650	660	275	1602	612	1654	664	1714	788.5	1492.5	555
1800 x 600 x 275	1850	660	275	1802	612	1854	664	1914	788.5	1692.5	555
2000 x 600 x 275	2050	660	275	2002	612	2054	664	2114	788.5	1892.5	555
400 x 800 x 275	450	875	275	402	827	454	879	578.5	1003.5	345	770
600 x 800 x 275	650	875	275	602	827	654	879	778.5	1003.5	545	770
800 x 800 x 275	850	875	275	802	827	854	879	978.5	1003.5	745	770
1000 x 800 x 275	1050	875	275	1002	827	1054	879	1178.5	1003.5	945	770
1200 x 800 x 275	1250	875	275	1202	827	1254	879	1378.5	1003.5	1145	770
1400 x 800 x 275	1450	875	275	1402	827	1454	879	1514	1003.5	1292.5	770
1600 x 800 x 275	1650	875	275	1602	827	1654	879	1714	1003.5	1492.5	770
1800 x 800 x 275	1850	875	275	1802	827	1854	879	1914	1003.5	1692.5	770
2000 x 800 x 275	2050	875	275	2002	827	2054	879	2114	1003.5	1892.5	770

Quick product references

Overall dimensions

TwinLine S 43

External dimensions



Dimensions of usable connection area

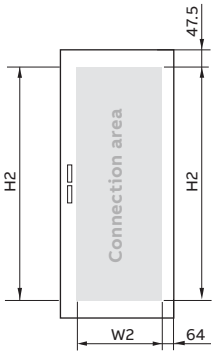

Sheet steel doors	External dimensions Height x width in mm		Internal dimensions Height x width in mm		Weight	max. installation weight
Type	H1	W1	H2	W2	in kg	in kg
ESAS0304	443	379	348	213	4.75	5
ESAS0306	643	379	548	213	6.62	5
ESAS0308	843	379	748	213	7.81	5
ESAS0310	1043	379	948	213	9.72	5
ESAS0312	1243	379	1148	213	11.49	5
ESAS0314	1443	379	1348	213	13.50	5
ESAS0316	1643	379	1548	213	15.05	5
ESAS0318	1843	379	1748	213	16.58	5
ESAS0320	2043	379	1948	213	18.14	5
ESAS0604	443	649	348	483	6.95	5
ESAS0606	643	649	548	483	9.46	5
ESAS0608	843	649	748	483	11.64	5
ESAS0610	1043	649	948	483	13.83	5
ESAS0612	1243	649	1148	483	16.24	5
ESAS0614	1443	649	1348	483	18.88	5
ESAS0616	1643	649	1548	483	21.07	5
ESAS0618	1843	649	1748	483	23.25	5
ESAS0620	2043	649	1948	483	25.43	5
ESAS0804	443	864	348	698	8.70	7.5
ESAS0806	643	864	548	698	11.72	7.5
ESAS0808	843	864	748	698	14.41	7.5
ESAS0810	1043	864	948	698	17.10	7.5
ESAS0810	1243	864	1148	698	20.02	7.5
ESAS0814	1443	864	1348	698	23.17	7.5
ESAS0816	1643	864	1548	698	25.86	7.5
ESAS0818	1843	864	1748	698	28.54	7.5
ESAS0820	2043	864	1948	698	31.23	7.5

Quick product references

Overall dimensions

TwinLine S 43

External dimensions



Dimensions of viewing area

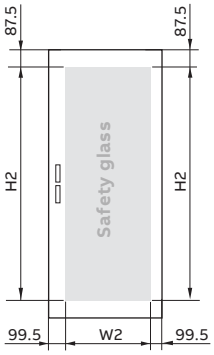

Transparent doors	External dimensions Height x width in mm		Viewing area Height x width in mm		Weight
Type	**H1**	**W1**	**H2**	**W2**	**in kg**
ESAT0606	643	649	468	450	9.63
ESAT0608	843	649	668	450	11.67
ESAT0610	1043	649	868	450	13.7
ESAT0612	1243	649	1068	450	15.96
ESAT0614	1443	649	1268	450	18.36
ESAT0616	1643	649	1468	450	20.4
ESAT0618	1843	649	1668	450	22.43
ESAT0620	2043	649	1868	450	24.46
ESAT0806	643	864	468	665	11.85
ESAT0808	843	864	668	665	14.3
ESAT0810	1043	864	868	665	16.74
ESAT0812	1243	864	1068	665	19.4
ESAT0814	1443	864	1268	665	22.23
ESAT0816	1643	864	1468	665	24.67
ESAT0818	1843	864	1668	665	27.12
ESAT0820	2043	864	1868	665	29.56
ESAT2606	643	864	468	450	11.66
ESAT2608	843	864	668	450	14.2
ESAT2610	1043	864	868	450	16.47
ESAT2612	1243	864	1068	450	19.5
ESAT2614	1443	864	1268	450	22.42
ESAT2616	1643	864	1468	450	24.96
ESAT2618	1843	864	1668	450	27.5
ESAT2620	2043	864	1868	450	30

Quick product references

Overall dimensions

TwinLine S 43 mounting plate

External dimensions / Usable connection area
Mounting plate

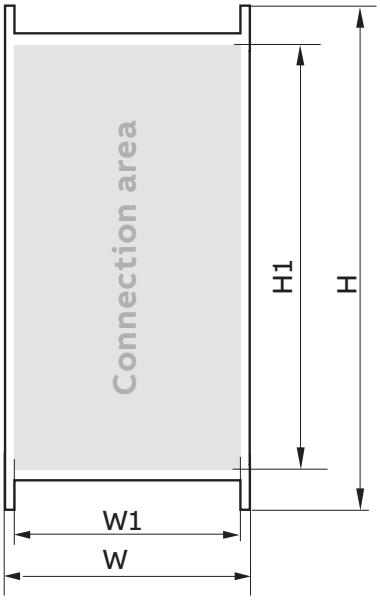

	External dimensions Width x depth in mm		Internal dimensions Width x depth in mm		Weight
Type	**H**	**W**	**H1**	**W1**	**in kg**
TZM204	600	496	522	410	3.51
TZM304	600	746	522	660	8.07
TZM208	1200	496	1122	410	11.82
TZM308	1200	746	1122	660	16.45
RM28	1800	496	1722	410	17.8
RM38	1800	746	1722	660	21

Quick product references

Overall dimensions

TwinLine S 43 plinth

External/internal dimensions

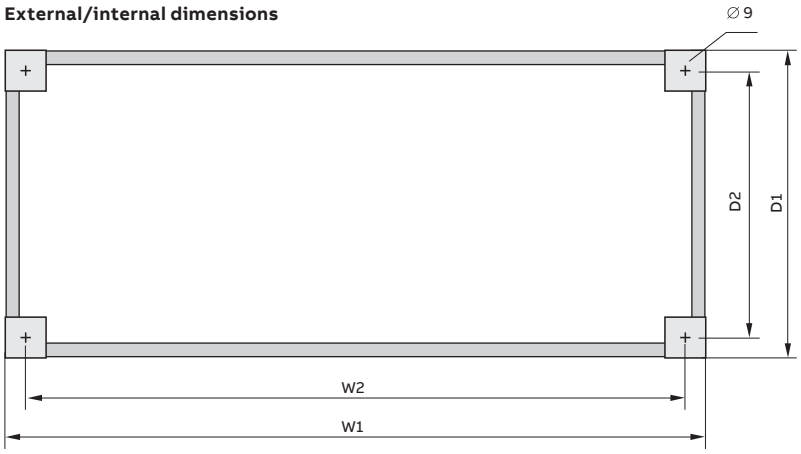

View side knockout TwinLine-G and -L

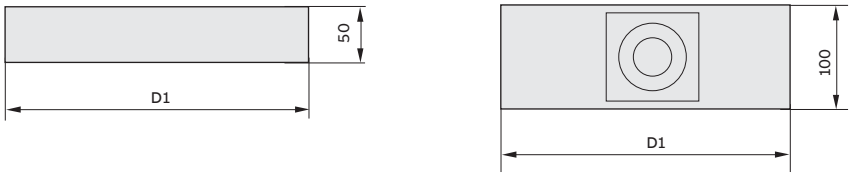

Detail view for side knockout

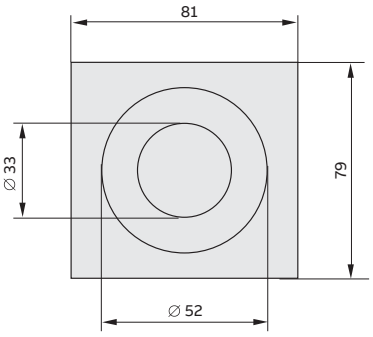

	External dimensions Width x depth in mm		Internal dimensions Width x depth in mm		Weight
Type	**W1**	**D1**	**W2**	**D2**	**in kg**
Plinth height 50 mm					
ESAL0305	390	253.5	360	223.5	1.57
ESAL0605	660	253.5	630	223.5	2.10
ESAL0805	875	253.5	845	223.5	2.53
ESAG0305	390	203.5	360	173.5	1.44
ESAG0605	660	203.5	630	173.5	1.98
ESAG0805	875	203.5	845	173.5	2.41
Plinth height 100 mm					
ESAL0310	390	253.5	360	223.5	2.59
ESAL0610	660	253.5	630	223.5	3.45
ESAL0810	875	253.5	845	223.5	4.13
ESAG0310	390	203.5	360	173.5	2.41
ESAG0610	660	203.5	630	173.5	3.27
ESAG0810	875	203.5	845	173.5	3.95

Quick product references

Overall dimensions

TwinLine S 43 Side view assembly with mounting plate

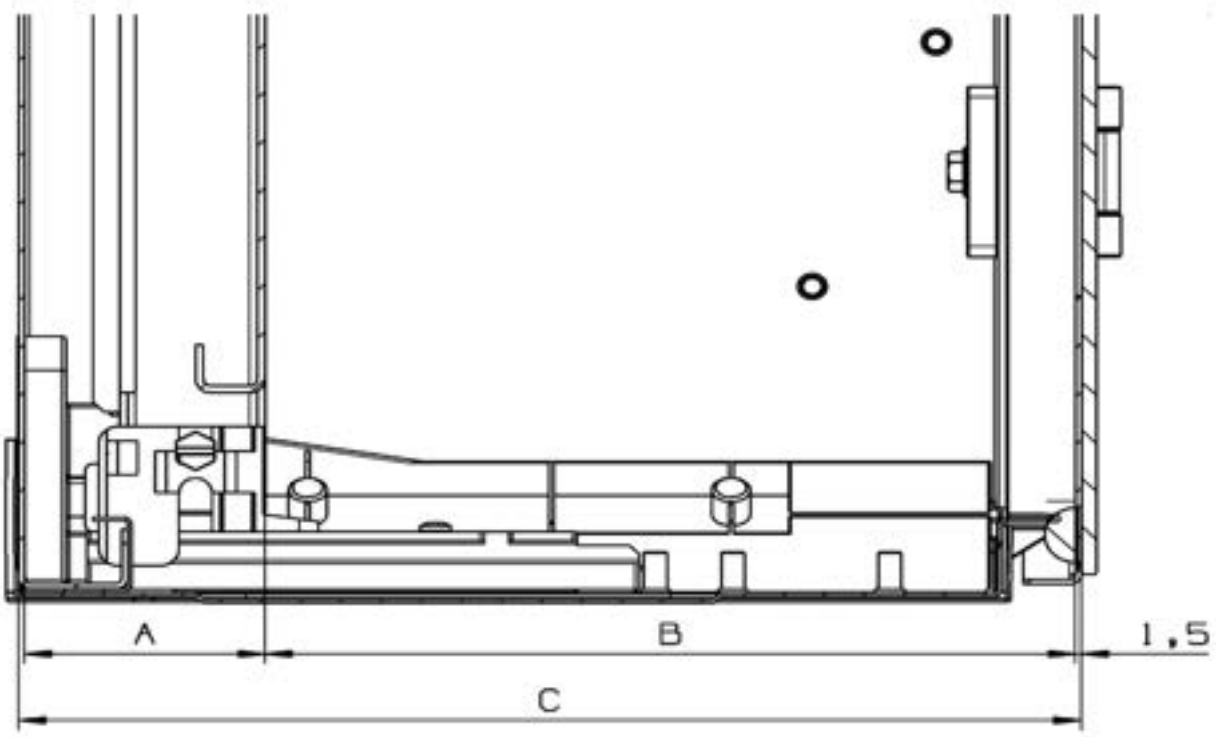

		A in mm for installation position					
Cabinet series	**Depth (C) in mm**	**Pos 3**	**Pos 2**	**Pos 1**	**Pos 0**	**Pos -1**	**Pos -2**
TwinLine G	225	63	75.5	88	100.5	113	125.5
TwinLine L	275	63	75.5	88	100.5	113	125.5
Cabinet series	**Depth (C) in mm**	**B in mm for installation position**					
TwinLine G	225	159	146.5	134	121.5	109	96.5
TwinLine L	275	209	196.5	184	171.5	159	146.5

Quick product references

Overall dimensions

TwinLine S 43 Side view with FlexiLIne for 225 mm und 275 mm depth

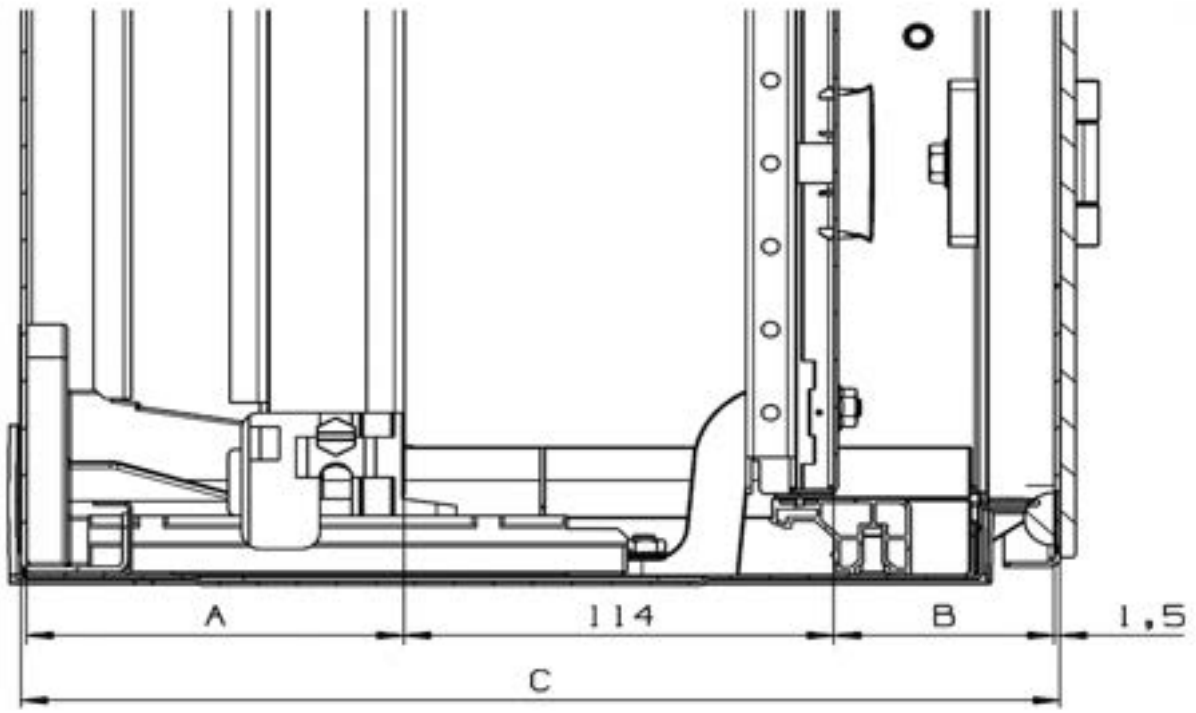

	Depth (C) in mm	A in mm	B in mm
TwinLine G	225	62	46
TwinLine L	275	100	58

Quick product references

Overall dimensions

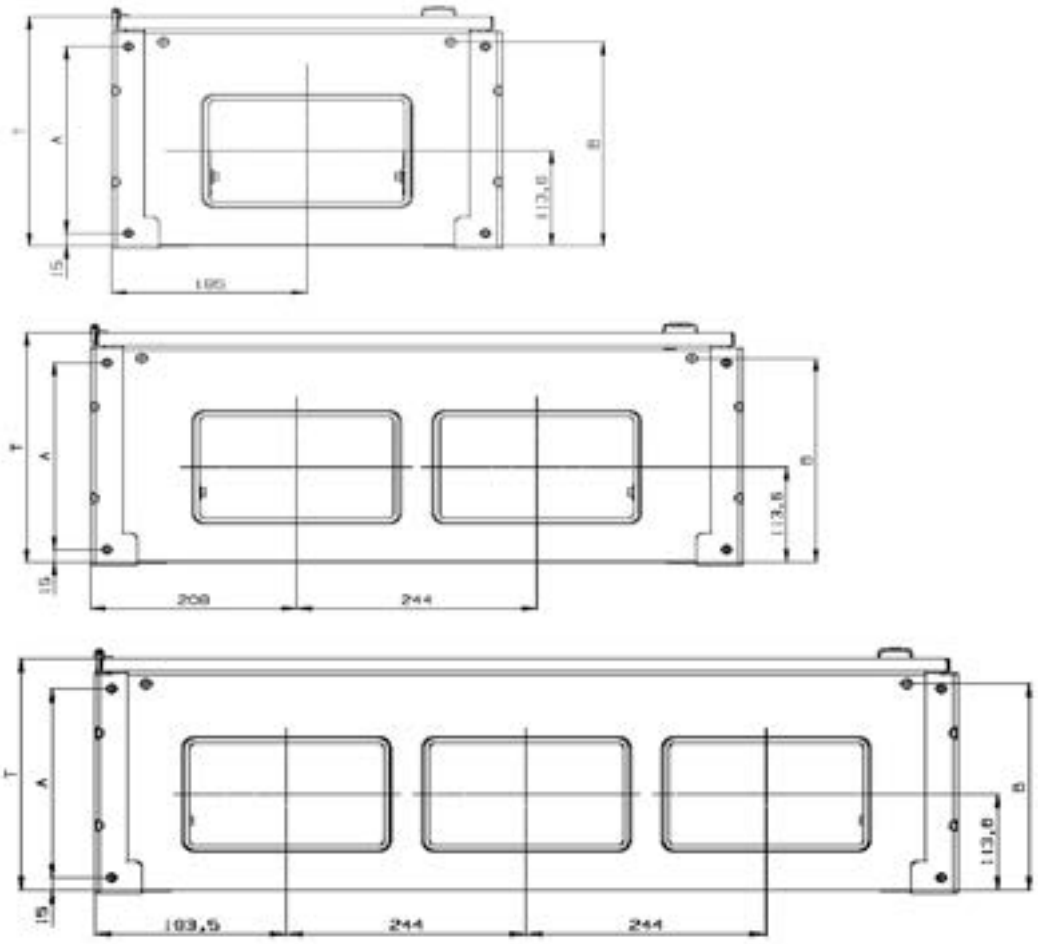

Depth in mm	A in mm	B in mm
225	173.5	170
275	223.5	244

Quick product references

Overall dimensions

Modular consumer units AI10N / AI11N

Basic enclosure

Modular enclosure



AI10N + AI11N



2-row combination

Quick product references

Overall dimensions

Hood-type consumer units A300

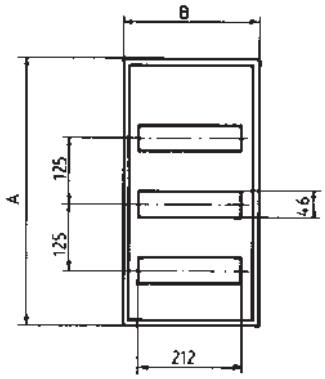

Allowed power loss hood-type consumer units A300

DIN 43871 with over temperature △T*

Type	Power loss (W)		
	△T 20 K	△T 25 K	△T 30 K
A31...	12.5	16.5	21.0
A32...	15.0	20.0	25.0
A33...	17.0	22.0	28.0
A34...	20.5	27.0	34.0

*T is the temperature difference between upper temperature rise limit, mounted devices and ambient.

Type	A	B	C
A31...	245	295	110
A32...	385	295	110
A33...	510	295	110
A34...	635	295	110

Quick product references

Overall dimensions

Compact distribution boards

Type	H	W	H1	W1
AT22E, AL22	374	574	235	417
AT31, AL31	524	324	385	167
AT32, AT32TE, AT32R2, AT32TR2, AL32	524	574	385	417
AT41, AT41TE, AT41R3, AT41TR3, AL41	674	324	535	167
AT42, AT42TE, AT42M, AT42/2, AT42R3, AT42TR3,AL42	674	574	535	417
AT43, AT43R3, AT43TR3, AL43	674	824	535	667
AT51, AT51TE, AT51R4, AT51TR4, AL51	824	324	685	167
AT52, AT52TE, AT52K, AT52/2, AT52R4, AT52TR4, AL52	824	574	685	417
AT53, AT53M,AT53K, AT53R4, AT53TR4, AL53	824	824	685	667
AT54K, AK54E, AT54R4, AL54	824	1074	685	917
AT61, AT61TE, AT61R5, AT61TR5, AL61	974	324	835	167
AT62, AT62TE, AT62K, AT62R5, AT62TR5, AL62	974	574	835	417
AT63E, AT63K, AT63R5, AT63TR5, AL63	974	824	835	667
AT64K, AL64	974	1074	835	917
AT72, AT72K, AT72R6, AT72TR6, AL72	1124	574	985	417
AT73K, AT73R6, AT73TR6, AL73	1124	824	985	667

Dimensions in mm

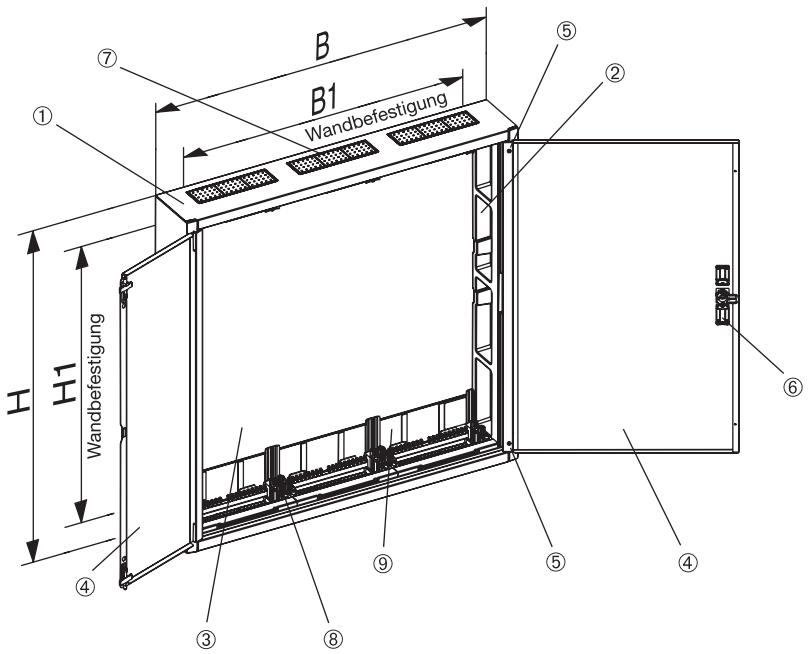

Quick product references

Overall dimensions

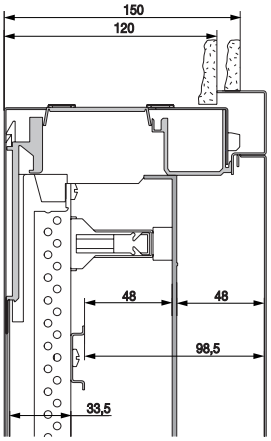

Distribution board panel

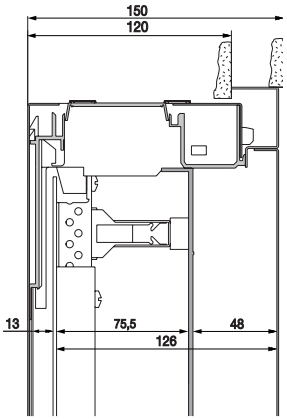

Mounting plate

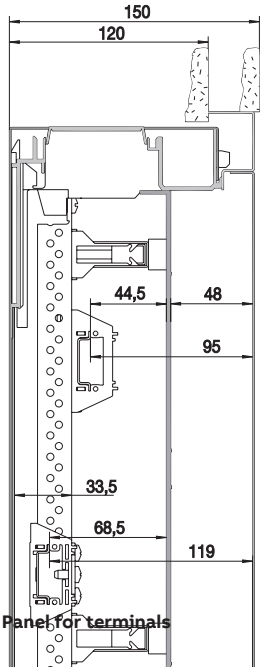

Panel for terminals

Flush-mounting with door. U		
Type	**Weight in kg**	**Power loss in Watts $\triangle t_{1.0}$ 20K**
U32	13.50	33.10
U32R2	13.00	33.10
U32TE	12.50	33.10
U32TR2	11.00	33.10
U41	10.50	24.30
U41R3	10.50	24.30
U41TE	9.00	24.30
U41TR3	9.50	24.30
U42	15.50	40.10
U42/2	16.50	40.10
U42D	16.50	40.10
U42FPT	17.00	40.10
U42M	18.50	40.10
U42R3	16.00	40.10
U42TE	14.00	40.10
U42TR3	14.00	40.10
U43	22.50	57.40
U43R3	23.00	57.40
U43TR3	19.50	57.40
U51	12.50	28.40
U51R4	12.00	28.40
U51TE	12.00	28.40
U51TR4	10.50	28.40
U52	18.50	46.30
U52/2	19.00	46.30
U52K	18.50	46.30
U52R4	18.00	46.30
U52TE	16.00	46.30
U52TR4	16.00	46.30
U53	26.50	65.60
U53K	26.00	65.60
U53M	29.00	65.60
U53R4	26.50	65.60
U53TR4	22.00	65.60
U54E	33.00	61.80
U54K	32.50	61.80
U54R4	33.50	61.80
U61	14.50	32.90
U61R5	14.50	32.90
U61TE	12.50	32.90
U61TR5	12.50	32.90
U62	22.00	53.10
U62K	22.00	53.10
U62R5	22.00	53.10
U62TE	19.00	53.10
U62TR5	19.00	53.10
U63E	31.00	53.30
U63K	30.50	53.30
U63R5	31.50	53.30
U63TR5	26.00	53.30
U64K	38.00	68.30
U72	25.00	59.80
U72K	25.00	59.80
U72R6	26.00	59.80
U72TR6	21.50	59.80
U73K	35.00	62.30
U73R6	35.50	62.30
U73TR6	28.50	62.30

> Dimensions in mm

Quick product references

Overall dimensions

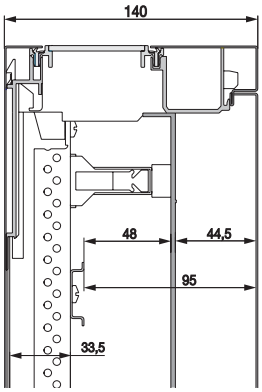

Distribution board panel

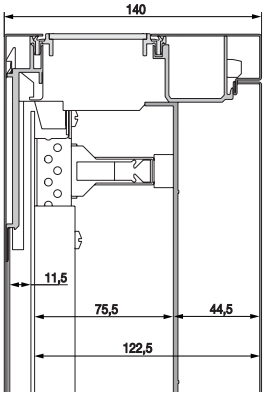

Mounting plate

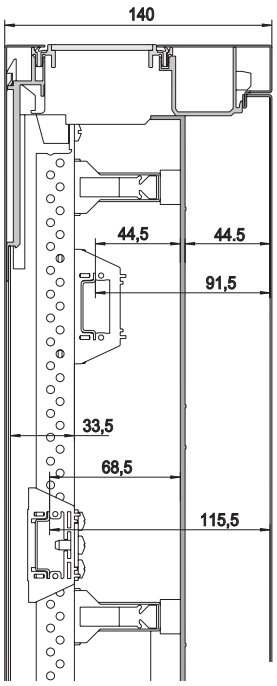

Panel for terminals

Wall-mounting with door. AT		
Type	**Weight in kg**	**Power loss in Watts $\triangle t_{1.0}$ 20K**
AT22E	9.70	36.30
AT31	7.50	27.30
AT32	12.50	45.30
AT32R2	12.00	45.30
AT32TE	12.00	45.30
AT32TR2	11.50	45.30
AT41	9.50	33.30
AT41R3	10.00	33.30
AT41TE	9.00	33.30
AT41TR3	9.00	33.30
AT42	15.00	53.90
AT42/2	15.50	53.90
AT42M	17.50	53.90
AT42R3	15.00	53.90
AT42TE	13.00	53.90
AT42TR3	13.50	53.90
AT43	21.50	76.30
AT43R3	21.50	76.30
AT43TR3	18.00	76.30
AT51	11.50	39.20
AT51R4	11.50	39.20
AT51TE	11.50	39.20
AT51TR4	11.00	39.20
AT52	17.00	62.60
AT52/2	18.00	62.60
AT52K	17.50	62.60
AT52R4	18.00	62.60
AT52TE	18.00	62.60
AT52TR4	16.00	62.60
AT53	25.00	59.50
AT53K	25.00	59.50
AT53M	28.00	59.50
AT53R4	25.50	59.50
AT53TR4	21.50	59.50
AT54E	32.00	85.10
AT54K	31.00	85.10
AT54R4	32.50	85.10
AT54TR4	26.50	85.10
AT61	13.50	45.40
AT61R5	13.50	45.40
AT61TE	11.50	45.40
AT61TR5	12.00	45.40
AT62	21.00	49.60
AT62K	20.50	49.60
AT62R5	20.00	49.60
AT62TE	20.00	49.60
AT62TR5	20.00	49.60
AT63E	29.50	70.00
AT63K	29.00	70.00
AT63R5	29.00	70.00
AT63TR5	24.00	70.00
AT64K	36.00	100.10
AT72	23.50	57.30
AT72K	23.50	57.30
AT72R6	23.50	57.30
AT72TR6	20.00	57.30
AT73K	33.50	83.60
AT73R6	34.00	83.60
AT73TR6	30.50	83.60

> Dimensions in mm

Quick product references

Overall dimensions

A wall-mounting cabinets IP43

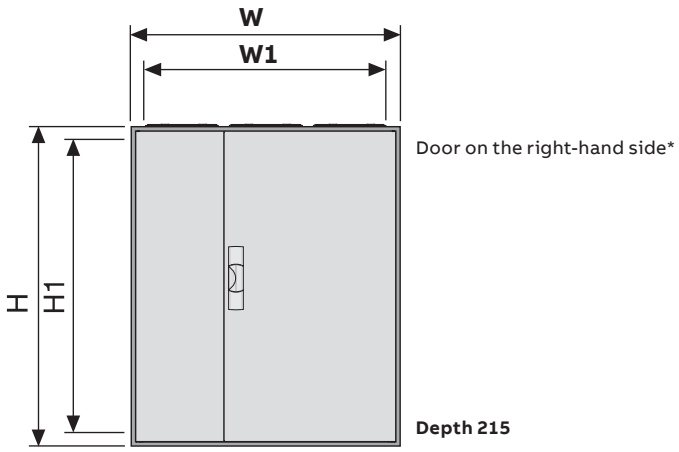

					Ext. dimensions		Int. dimensions		Door on the left-hand side*	Door on the right-hand side*	Weight	Power loss
Type	**OH**	**PW**	**SU**	**GU**	**H**	**W**	**H1**	**W1**	**H x W**	**H x W**	**in kg**	**in watts $\triangle t_{1,0}$ 20K**
1/00A	00	1	36	3	500	300	452	252		471.4 x 272	6.20	28.80
2/00A		2	72		500	550	452	502		471.4 x 522	8.40	47.40
3/00A		3	108		500	800	452	752	471.4 x 260	471.4 x 510	12.20	67.10
4/00A		4	144		500	1050	452	1002	471.4 x 510	471.4 x 510	15.80	66.20
5/00A		5	180		500	1300	452	1252	471.4 x 510	471.4 x 760	19.60	83.60
1/0A	0	1	48	4	650	300	602	252		621.4 x 272	7.80	35.20
2/0A		2	96		650	550	602	502		621.4 x 522	11.40	56.20
3/0A		3	144		650	800	602	752	621.4 x 260	621.4 x 510	15.60	59.80
4/0A		4	192		650	1050	602	1002	621.4 x 510	621.4 x 510	16.80	80.90
5/0A		5	240		650	1300	602	1252	621.4 x 510	621.4 x 760	24.00	105.60
1/1A	1	1	60	5	800	300	752	252		771.4 x 272	9.80	41.60
2/1A		2	120		800	550	752	502		771.4 x 522	13.40	65.30
3/1A		3	180		800	800	752	752	771.4 x 260	771.4 x 510	18.00	69.70
4/1A		4	240		800	1050	752	1002	771.4 x 510	771.4 x 510	23.80	96.80
5/1A		5	300		800	1300	752	1252	771.4 x 510	771.4 x 760	28.00	128.40
1/2A	2	1	72	6	950	300	902	252		921.4 x 272	10.80	48.10
2/2A		2	144		950	550	902	502		921.4 x 522	15.60	51.90
3/2A		3	216		950	800	902	752	921.4 x 260	921.4 x 510	21.00	79.20
4/2A		4	288		950	1050	902	1002	921.4 x 510	921.4 x 510	26.80	112.60
5/2A		5	360		950	1300	902	1252	921.4 x 510	921.4 x 760	31.20	150.90
1/3A	3	1	84	7	1100	300	1052	252		1071.4 x 272	12.00	54.50
2/3A		2	168		1100	550	1052	502		1071.4 x 522	17.60	60.70
3/3A		3	252		1100	800	1052	752	1071.4 x 260	1071.4 x 510	23.60	87.50
4/3A		4	336		1100	1050	1052	1002	1071.4 x 510	1071.4 x 510	30.00	131.30
5/3A		5	420		1100	1300	1052	1252	1071.4 x 510	1071.4 x 760	35.20	171.20
1/4A	4	1	96	8	1250	300	1202	252		1221.4 x 272	14.00	60.80
2/4A		2	192		1250	550	1202	502		1221.4 x 522	19.20	68.30
3/4A		3	288		1250	800	1202	752	1221.4 x 260	1221.4 x 510	26.00	101.50
4/4A		4	384		1250	1050	1202	1002	1221.4 x 510	1221.4 x 510	32.40	147.40
5/4A		5	480		1250	1300	1202	1252	1221.4 x 510	1221.4 x 760	40.20	190.50
1/5A	5	1	108	9	1400	300	1352	252		1371.4 x 272	15.00	67.20
2/5A		2	216		1400	550	1352	502		1371.4 x 522	22.40	77.80
3/5A		3	324		1400	800	1352	752	1371.4 x 260	1371.4 x 510	29.20	118.10
4/5A		4	432		1400	1050	1352	1002	1371.4 x 510	1371.4 x 510	35.20	156.00
5/5A		5	540		1400	1300	1352	1252	1371.4 x 510	1371.4 x 760	44.00	205.60

> Dimensions in mm

* Double-wing doors on cabinets with three or more panel widths

Quick product references

Overall dimensions

A wall-mounting cabinets IP43



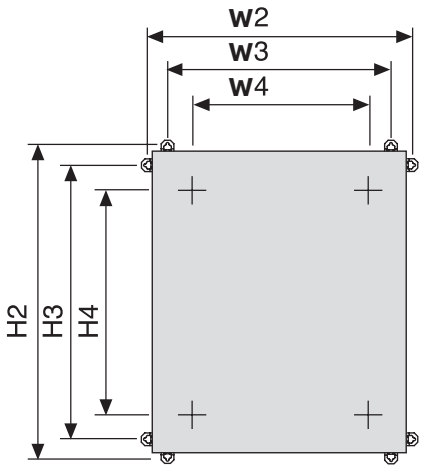

					Ext. fastening				Int. fastenning		Weight	Power loss
Type	**OH**	**PW**	**SU**	**GU**	**H2**	**H3**	**W2**	**W3**	**H4**	**W4**	**in kg**	**in watts $\triangle t_{1.0}$ 20K**
1/00A	00	1	36	3	547	436	347	236	402	170	6.20	28.80
2/00A		2	72		547	436	597	486	402	420	8.40	47.40
3/00A		3	108		547	436	847	736	402	670	12.20	67.10
4/00A		4	144		547	436	1097	986	402	920	15.80	66.20
5/00A		5	180		547	436	1347	1236	402	1170	19.60	83.60
1/0A	0	1	48	4	697	586	347	236	552	170	7.80	35.20
2/0A		2	96		697	586	597	486	552	420	11.40	56.20
3/0A		3	144		697	586	847	736	552	670	15.60	59.80
4/0A		4	192		697	586	1097	986	552	920	16.80	80.90
5/0A		5	240		697	586	1347	1236	552	1170	24.00	105.60
1/1A	1	1	60	5	847	736	347	236	702	170	9.80	41.60
2/1A		2	120		847	736	597	486	702	420	13.40	65.30
3/1A		3	180		847	736	847	736	702	670	18.00	69.70
4/1A		4	240		847	736	1097	986	702	920	23.80	96.80
5/1A		5	300		847	736	1347	1236	702	1170	28.00	128.40
1/2A	2	1	72	6	997	886	347	236	852	170	10.80	48.10
2/2A		2	144		997	886	597	486	852	420	15.60	51.90
3/2A		3	216		997	886	847	736	852	670	21.00	79.20
4/2A		4	288		997	886	1097	986	852	920	26.80	112.60
5/2A		5	360		997	886	1347	1236	852	1170	31.20	150.90
1/3A	3	1	84	7	1147	1036	347	236	1002	170	12.00	54.50
2/3A		2	168		1147	1036	597	486	1002	420	17.60	60.70
3/3A		3	252		1147	1036	847	736	1002	670	23.60	87.50
4/3A		4	336		1147	1036	1097	986	1002	920	30.00	131.30
5/3A		5	420		1147	1036	1347	1236	1002	1170	35.20	171.20
1/4A	4	1	96	8	1297	1186	347	236	1152	170	14.00	60.80
2/4A		2	192		1297	1186	597	486	1152	420	19.20	68.30
3/4A		3	288		1297	1186	847	736	1152	670	26.00	101.50
4/4A		4	384		1297	1186	1097	986	1152	920	32.40	147.40
5/4A		5	480		1297	1186	1347	1236	1152	1170	40.20	190.50
1/5A	5	1	108	9	1447	1336	347	236	1302	170	15.00	67.20
2/5A		2	216		1447	1336	597	486	1302	420	22.40	77.80
3/5A		3	324		1447	1336	847	736	1302	670	29.20	118.10
4/5A		4	432		1447	1336	1097	986	1302	920	35.20	156.00
5/5A		5	540		1447	1336	1347	1236	1302	1170	44.00	205.60

> Dimensions in mm

Quick product references

Overall dimensions

A wall-mounting cabinets IP43 Interior configuration

Cross section with distribution boards panels and combination sets

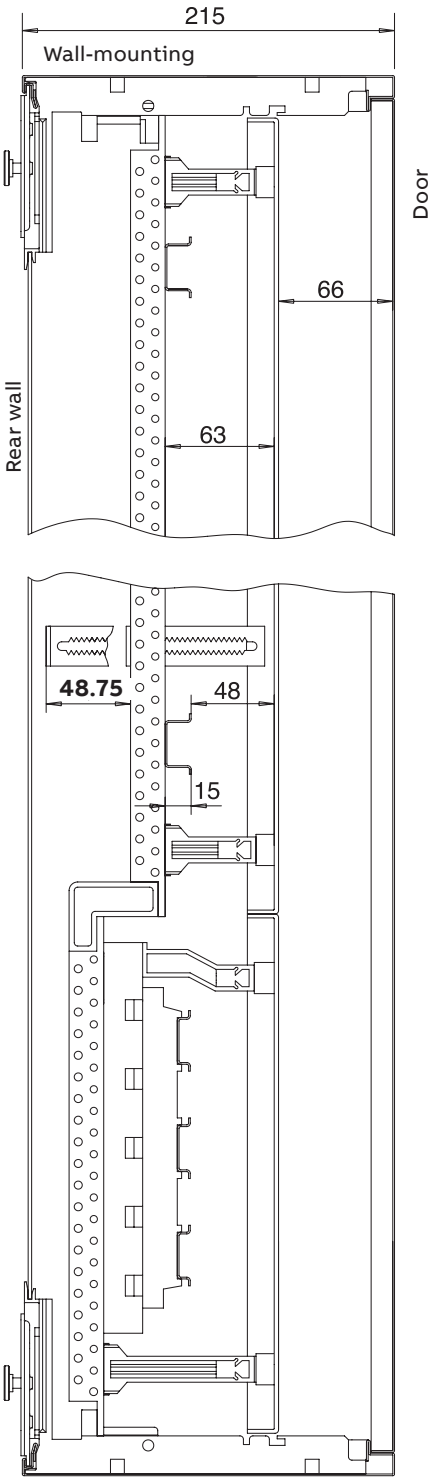

> Dimensions in mm

Quick product references

Overall dimensions

A wall-mounting cabinets IP43 transparent doors

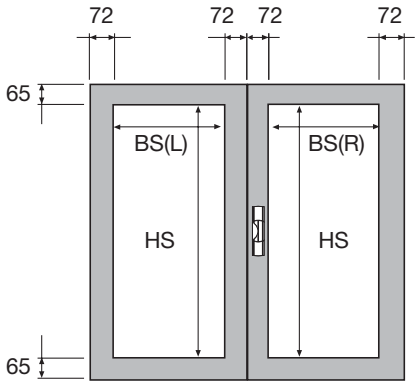

	Cabinet				Door on the left	Door on the right	Window on the left	Window on the right
Type	A Cabinet	OH	PW	GU	H x W	H x W	HW x WW(L)	HW x WW(R)
TTS100	1/00A	00	1	3	-	471.4 x 272	-	341.4 x 128
TTS200	2/00A		2		-	471.4 x 522	-	341.4 x 378
TTS300	3/00A		3		471.4 x 260	471.4 x 510	341.4 x 116	341.4 x 366
TTS400	4/00A		4		471.4 x 510	471.4 x 510	341.4 x 366	341.4 x 366
TTS500	5/00A		5		471.4 x 510	471.4 x 760	341.4 x 366	341.4 x 616
TTS10	1/0A	0	1	4	-	621.4 x 272	-	491.4 x 128
TTS20	2/0A		2		-	621.4 x 522	-	491.4 x 378
TTS30	3/0A		3		621.4 x 260	621.4 x 510	491.4 x 116	491.4 x 366
TTS40	4/0A		4		621.4 x 510	621.4 x 510	491.4 x 366	491.4 x 366
TTS50	5/0A		5		621.4 x 510	621.4 x 760	491.4 x 366	491.4 x 616
TTS11	1/1A	1	1	5	-	771.4 x 272	-	641.4 x 128
TTS21	2/1A		2		-	771.4 x 522	-	641.4 x 378
TTS31	3/1A		3		771.4 x 260	771.4 x 510	641.4 x 116	641.4 x 366
TTS41	4/1A		4		771.4 x 510	771.4 x 510	641.4 x 366	641.4 x 366
TTS51	5/1A		5		771.4 x 510	771.4 x 760	641.4 x 366	641.4 x 616
TTS12	1/2A	2	1	6	-	921.4 x 272	-	791.4 x 128
TTS22	2/2A		2		-	921.4 x 522	-	791.4 x 378
TTS32	3/2A		3		921.4 x 260	921.4 x 510	791.4 x 116	791.4 x 366
TTS42	4/2A		4		921.4 x 510	921.4 x 510	791.4 x 366	791.4 x 366
TTS52	5/2A		5		921.4 x 510	921.4 x 760	791.4 x 366	791.4 x 616
TTS13	1/3A	3	1	7	-	1071.4 x 272	-	941.4 x 128
TTS23	2/3A		2		-	1071.4 x 522	-	941.4 x 378
TTS33	3/3A		3		1071.4 x 260	1071.4 x 510	941.4 x 116	941.4 x 366
TTS43	4/3A		4		1071.4 x 510	1071.4 x 510	941.4 x 366	941.4 x 366
TTS53	5/3A		5		1071.4 x 510	1071.4 x 760	941.4 x 366	941.4 x 616
TTS14	1/4A	4	1	8	-	1221.4 x 272	-	1091.4 x 128
TTS24	2/4A		2		-	1221.4 x 522	-	1091.4 x 378
TTS34	3/4A		3		1221.4 x 260	1221.4 x 510	1091.4 x 116	1091.4 x 366
TTS44	4/4A		4		1221.4 x 510	1221.4 x 510	1091.4 x 366	1091.4 x 366
TTS54	5/4A		5		1221.4 x 510	1221.4 x 760	1091.4 x 366	1091.4 x 616
TTS15	1/5A	5	1	9	-	1371.4 x 272	-	1241.4 x 128
TTS25	2/5A		2		-	1371.4 x 522	-	1241.4 x 378
TTS35	3/5A		3		1371.4 x 260	1371.4 x 510	1241.4 x 116	1241.4 x 366
TTS45	4/5A		4		1371.4 x 510	1371.4 x 510	1241.4 x 366	1241.4 x 366
TTS55	5/5A		5		1371.4 x 510	1371.4 x 760	1241.4 x 366	1241.4 x 616

> Dimensions in mm

*Double-wing doors on cabinets with three or more panel widths

Quick product references

Overall dimensions

B wall-mounting cabinets IP43

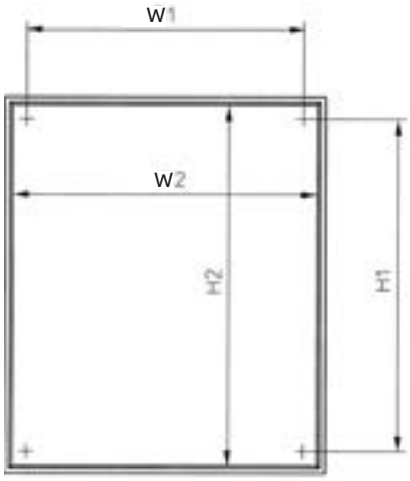

					Ext. dimensions			Int. dimensions		Int. fastening dimensions		Weight	Power loss
Type	**OH**	**PW**	**SU**	**GU**	**H**	**W**	**D**	**H2**	**W2**	**H1**	**W1**	**in kg**	**in watts $\triangle t_{i,o}$ 20K**
1/00B	00	1	36	3	500	300	215	452	252	388	188	7,40	28,80
2/00B		2	72		500	550	215	452	502	388	438	9,60	47,40
3/00B		3	108		500	800	215	452	752	388	688	13,40	67,10
1/0B	0	1	48	4	650	300	215	602	252	538	188	9,00	35,20
2/0B		2	96		650	550	215	602	502	538	438	12,60	56,20
3/0B		3	144		650	800	215	602	752	538	688	16,80	59,80
4/0B		4	192		650	1050	215	602	1002	538	938	18,00	80,90
5/0B		5	240		650	1300	215	602	1252	538	1188	25,20	105,60
1/1B	1	1	60	5	800	300	215	752	252	688	188	10,80	41,60
2/1B		2	120		800	550	215	752	502	688	438	14,60	65,30
3/1B		3	180		800	800	215	752	752	688	688	19,20	69,70
4/1B		4	240		800	1050	215	752	1002	688	938	24,80	96,80
5/1B		5	300		800	1300	215	752	1252	688	1188	29,20	128,40
1/2B	2	1	72	6	950	300	215	902	252	838	188	12,00	48,10
2/2B		2	144		950	550	215	902	502	838	438	16,80	51,90
3/2B		3	216		950	800	215	902	752	838	688	22,20	79,20
4/2B		4	288		950	1050	215	902	1002	838	938	28,00	112,60
5/2B		5	360		950	1300	215	902	1252	838	1188	32,40	150,90
1/3B	3	1	84	7	1100	300	215	1052	252	988	188	13,20	54,50
2/3B		2	168		1100	550	215	1052	502	988	438	18,80	60,70
3/3B		3	252		1100	800	215	1052	752	988	688	24,80	87,50
4/3B		4	336		1100	1050	215	1052	1002	988	938	31,20	131,30
5/3B		5	420		1100	1300	215	1052	1252	988	1188	36,40	171,20
1/4B	4	1	96	8	1250	300	215	1202	252	1138	188	15,00	60,80
2/4B		2	192		1250	550	215	1202	502	1138	438	20,40	68,30
3/4B		3	288		1250	800	215	1202	752	1138	688	27,20	101,50
4/4B		4	384		1250	1050	215	1202	1002	1138	938	33,60	147,40
5/4B		5	480		1250	1300	215	1202	1252	1138	1188	41,40	190,50
1/5B	5	1	108	9	1400	300	215	1352	252	1288	188	16,20	67,20
2/5B		2	216		1400	550	215	1352	502	1288	438	23,60	77,80
3/5B		3	324		1400	800	215	1352	752	1288	688	30,40	118,10
4/5B		4	432		1400	1050	215	1352	1002	1288	938	36,40	156,00
5/5B		5	540		1400	1300	215	1352	1252	1288	1188	45,20	205,60

> Dimensions in mm

Quick product references

Overall dimensions

B wall-mounting cabinets IP43

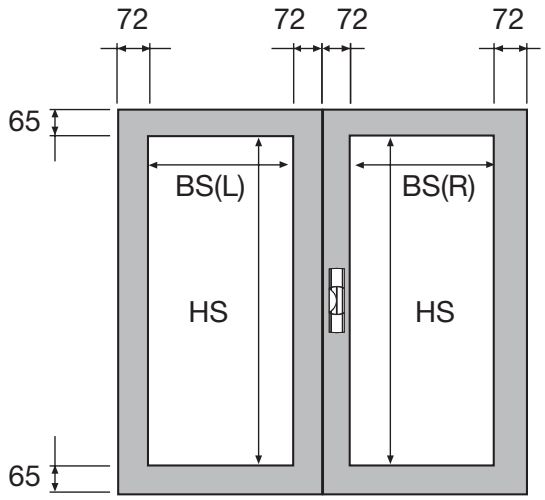

Type	B wall-mounting cabinet	OH	PW	GU	Door on the left-hand side* H x W	Door on the right-hand side* H x W	Window on the left-hand side HW x WW(L)	Window on the right-hand side HW x WW(R)
TTS100	1/00B	00	1	3	-	471.4 x 272	-	341.4 x 128
TTS200	2/00B		2		-	471.4 x 522	-	341.4 x 378
TTS300	3/00B		3		471.4 x 260	471.4 x 510	341.4 x 116	341.4 x 366
TTS400	-		4		471.4 x 510	471.4 x 510	341.4 x 366	341.4 x 366
TTS500	-		5		471.4 x 510	471.4 x 760	341.4 x 366	341.4 x 616
TTS10	1/0B	0	1	4	-	621.4 x 272	-	491.4 x 128
TTS20	2/0B		2		-	621.4 x 522	-	491.4 x 378
TTS30	3/0B		3		621.4 x 260	621.4 x 510	491.4 x 116	491.4 x 366
TTS40	4/0B		4		621.4 x 510	621.4 x 510	491.4 x 366	491.4 x 366
TTS50	5/0B		5		621.4 x 510	621.4 x 760	491.4 x 366	491.4 x 616
TTS11	1/1B	1	1	5	-	771.4 x 272	-	641.4 x 128
TTS21	2/1B		2		-	771.4 x 522	-	641.4 x 378
TTS31	3/1B		3		771.4 x 260	771.4 x 510	641.4 x 116	641.4 x 366
TTS41	4/1B		4		771.4 x 510	771.4 x 510	641.4 x 366	641.4 x 366
TTS51	5/1B		5		771.4 x 510	771.4 x 760	641.4 x 366	641.4 x 616
TTS12	1/2B	2	1	6	-	921.4 x 272	-	791.4 x 128
TTS22	2/2B		2		-	921.4 x 522	-	791.4 x 378
TTS32	3/2B		3		921.4 x 260	921.4 x 510	791.4 x 116	791.4 x 366
TTS42	4/2B		4		921.4 x 510	921.4 x 510	791.4 x 366	791.4 x 366
TTS52	5/2B		5		921.4 x 510	921.4 x 760	791.4 x 366	791.4 x 616
TTS13	1/3B	3	1	7	-	1071.4 x 272	-	941.4 x 128
TTS23	2/3B		2		-	1071.4 x 522	-	941.4 x 378
TTS33	3/3B		3		1071.4 x 260	1071.4 x 510	941.4 x 116	941.4 x 366
TTS43	4/3B		4		1071.4 x 510	1071.4 x 510	941.4 x 366	941.4 x 366
TTS53	5/3B		5		1071.4 x 510	1071.4 x 760	941.4 x 366	941.4 x 616
TTS14	1/4B	4	1	8	-	1221.4 x 272	-	1091.4 x 128
TTS24	2/4B		2		-	1221.4 x 522	-	1091.4 x 378
TTS34	3/4B		3		1221.4 x 260	1221.4 x 510	1091.4 x 116	1091.4 x 366
TTS44	4/4B		4		1221.4 x 510	1221.4 x 510	1091.4 x 366	1091.4 x 366
TTS54	5/4B		5		1221.4 x 510	1221.4 x 760	1091.4 x 366	1091.4 x 616
TTS15	1/5B	5	1	9	-	1371.4 x 272	-	1241.4 x 128
TTS25	2/5B		2		-	1371.4 x 522	-	1241.4 x 378
TTS35	3/5B		3		1371.4 x 260	1371.4 x 510	1241.4 x 116	1241.4 x 366
TTS45	4/5B		4		1371.4 x 510	1371.4 x 510	1241.4 x 366	1241.4 x 366
TTS55	5/5B		5		1371.4 x 510	1371.4 x 760	1241.4 x 366	1241.4 x 616

> Dimensions in mm

*Double-wing doors on cabinets with three or more panel widths

Quick product references

Overall dimensions

H and HS floor-standing cabinets IP43

	Type	Weight (kg) with plinth	Power loss (W) $\triangle t_{1,0}$ 20K	Ext. dimensions with plinth H x W x D	Int. dimensions H1 x W1
HS floor-standing cabinets With mounted EDF installation set for installing distribution board panels, combination sets and modules on the EDF mounting frame, using the ZB15 assembly set, it is also possible to incorporate meter panels.	1/8HS	30.33	67,40	1900 x 300 x 225	1802 x 252
	2/8HS	44.62	119,20	1900 x 550 x 225	1802 x 502
	3/8HS	57.20	170,90	1900 x 800 x 225	1802 x 752
	4/8HS	73.41	206,80	1900 x 1050 x 225	1802 x 1002
H floor-standing cabinets With mounted EDF installation set for installing distribution board panels, combination sets and modules on the EDF mounting frame.	1/8H	29.63	67,40	1900 x 300 x 225	1802 x 252
	2/8H	43.88	119,20	1900 x 550 x 225	1802 x 502
	3/8H	56.06	170,90	1900 x 800 x 225	1802 x 752
	4/8H	70.83	206,80	1900 x 1050 x 225	1802 x 1002

> Dimensions in mm

Cross section, HS cabinet with meter panel

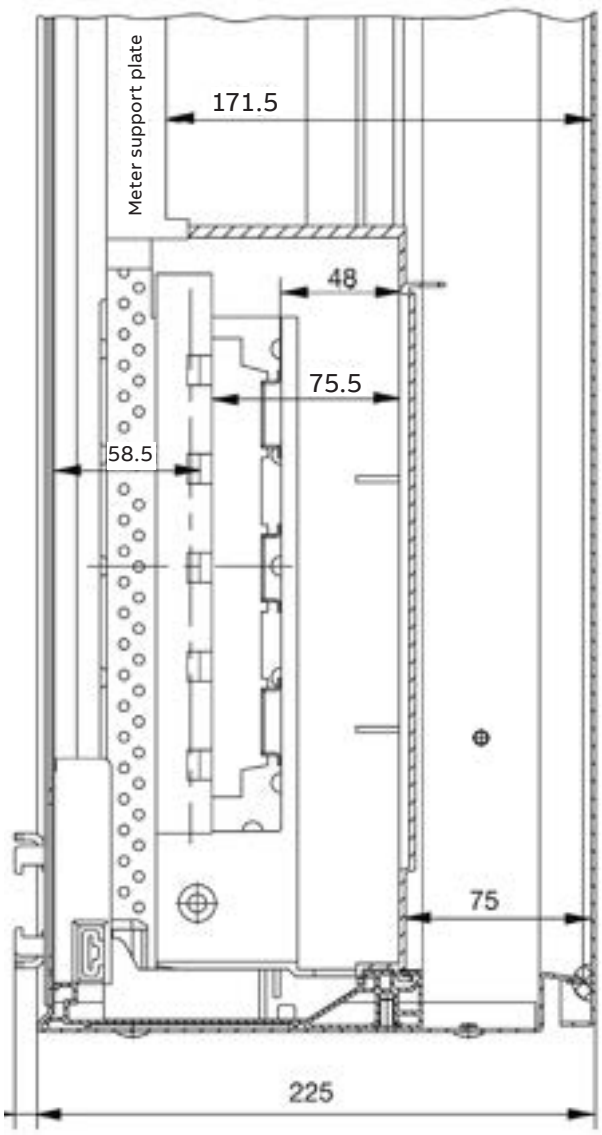

Cross section H-cabinet with distribution board panels/modules on the EDF mounting frame

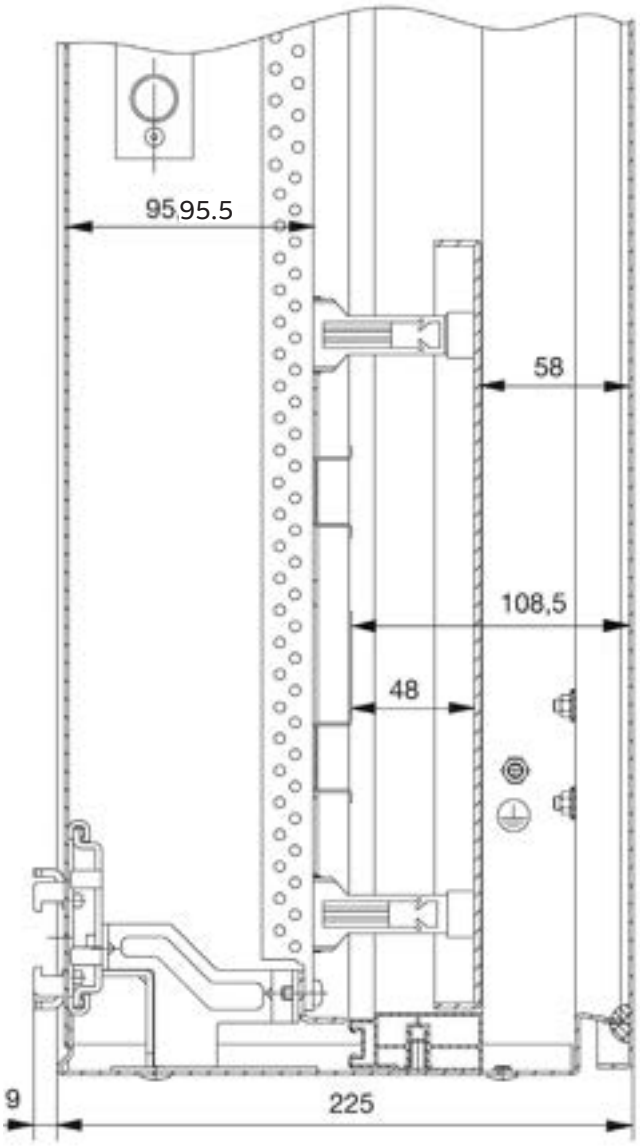

Quick product references

Overall dimensions

H and HS floor-standing cabinets IP43 Plinth dimensions

50 mm plinth



150 mm plinth



	Type	Fixing the plinth on the cabinet A in mm	Fixing the plinth on the floor B in mm
Hole spacing for fixing the plinth on the floor Plinth, height 50 mm	GSR1	270 mm	210 mm
	GSR2	520 mm	460 mm
	GSR3	770 mm	710 mm
	GSR4	1020 mm	960 mm
Hole spacing for fixing the plinth on the floor Plinth, height 150 mm	GRG1	270 mm	240 mm
	GRG2	520 mm	490 mm
	GRG3	770 mm	740 mm
	GRG4	1020 mm	990 mm

TwinLine-G, cabinet depth 225 mm,

Front view
Wall-mounting and floor-standing cabinet
External/internal dimensions



Front view
Wall-mounting cabinet
Wall fastening dimensions



Front view
Floor-standing cabinet
Wall fastening dimensions

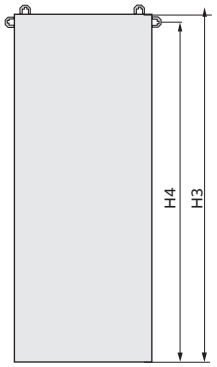

Front view
External fastening
Detail



Side view
With/without door



Height		Width	Type	External dimensions in mm		Internal dimensions in mm		External dimensions with flange knockout in mm		Wall fastening dimensions in mm			
GU	**OH**	**PW**		**H1**	**W1**	**H2**	**W2**	**H**	**W**	**H3**	**W3**	**H4**	**W4**
TwinLine-G wall-mounting cabinets ⏚▣													
4	0	1	TG104	650	300	602	252	654	304	693.5	328	542	192
		2	TG204	650	550	602	502	654	554	693.5	578	542	442
		3	TG304	650	800	602	752	654	804	693.5	828	542	692
		4	TG404	650	1050	602	1002	654	1054	693.5	1078	542	942
		5	TG504	650	1300	602	1252	654	1304	693.5	1328	542	1192
5	1	1	TG105	800	300	752	252	804	304	843.5	328	692	192
		2	TG205	800	550	752	502	804	554	843.5	578	692	442
		3	TG305	800	800	752	752	804	804	843.5	828	692	692
		4	TG405	800	1050	752	1002	804	1054	843.5	1078	692	942
		5	TG505	800	1300	752	1252	804	1304	843.5	1328	692	1192
6	2	1	TG106	950	300	902	252	954	304	993.5	328	842	192
		2	TG206	950	550	902	502	954	554	993.5	578	842	442
		3	TG306	950	800	902	752	954	804	993.5	828	842	692
		4	TG406	950	1050	902	1002	954	1054	993.5	1078	842	942
		5	TG506	950	1300	902	1252	954	1304	993.5	1328	842	1192
7	3	1	TG107	1100	300	1052	252	1104	304	1143.5	328	992	192
		2	TG207	1100	550	1052	502	1104	554	1143.5	578	992	442
		3	TG307	1100	800	1052	752	1104	804	1143.5	828	992	692
		4	TG407	1100	1050	1052	1002	1104	1054	1143.5	1078	992	942
		5	TG507	1100	1300	1052	1252	1104	1304	1143.5	1328	992	1192
8	4	1	TG108	1250	300	1202	252	1254	304	1293.5	328	1142	192
		2	TG208	1250	550	1202	502	1254	554	1293.5	578	1142	442
		3	TG308	1250	800	1202	752	1254	804	1293.5	828	1142	692
		4	TG408	1250	1050	1202	1002	1254	1054	1293.5	1078	1142	942
		5	TG508	1250	1300	1202	1252	1254	1304	1293.5	1328	1142	1192
9	5	1	TG109	1400	300	1352	252	1404	304	1443.5	328	1292	192
		2	TG209	1400	550	1352	502	1404	554	1443.5	578	1292	442
		3	TG309	1400	800	1352	752	1404	804	1443.5	828	1292	692
		4	TG409	1400	1050	1352	1002	1404	1054	1443.5	1078	1292	942
		5	TG509	1400	1300	1352	1252	1404	1304	1443.5	1328	1292	1192
TwinLine-G floor-standing cabinets ⏚▣													
12	8	1	TG112	1850	300	1802	252	1854	304	1872	328	1796	192
		2	TG212	1850	550	1802	502	1854	554	1872	578	1796	442
		3	TG312	1850	800	1802	752	1854	804	1872	828	1796	692
		4	TG412	1850	1050	1802	1002	1854	1054	1872	1078	1796	942
		5	TG512	1850	1300	1802	1252	1854	1304	1872	1328	1796	1192

> Dimensions in mm

Quick product references

Overall dimensions

TwinLine-G, cabinet depth 225 mm, ., ,

Type of installation
Cabinet to the wall

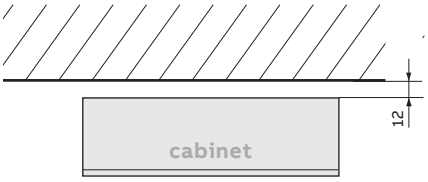

Type of installation
Cabinet combination in series



Type of installation
Cabinet combination on top of each other



Height		Width		⏚/⧈ Power loss in Watt*	⏚ Cabinet weight in kg		⧈ Cabinet weight in kg		max. installation weight
GU	OH	PW	Type	$\triangle t_{1.0}$ 20K	With door	Without door	With door	Without door	in kg
TwinLine-G wall-mounting cabinets ⏚⧈									
4	0	1	TG104	35.80	11.40	7.43	12.89	8.92	15.00
		2	TG204	57.00	16.17	9.95	17.80	11.59	30.00
		3	TG304	61.00	21.02	12.47	22.80	14.25	45.00
		4	TG404	82.30	28.03	15.54	29.95	17.46	60.00
		5	TG504	107.80	32.86	18.07	34.92	20.13	75.00
5	1	1	TG105	42.30	13.17	8.40	14.86	10.10	20.50
		2	TG205	66.10	18.72	11.22	20.60	13.11	41.00
		3	TG305	71.00	24.29	14.03	26.37	16.11	61.50
		4	TG405	99.00	32.45	17.40	34.71	19.67	82.50
		5	TG505	131.20	38.03	20.22	40.49	22.68	103.00
6	2	1	TG106	48.80	14.89	9.37	16.78	11.26	26.00
		2	TG206	52.60	21.23	12.43	23.36	14.61	52.50
		3	TG306	80.90	27.55	15.59	29.92	17.37	78.50
		4	TG406	115.10	36.84	19.25	39.46	21.86	105.00
		5	TG506	153.70	43.18	22.36	46.03	25.09	131.00
7	3	1	TG107	55.40	17.14	10.72	19.23	12.81	31.50
		2	TG207	61.40	24.36	14.25	26.74	16.64	63.50
		3	TG307	93.50	31.56	17.79	34.23	20.46	95.50
		4	TG407	133.70	42.23	21.87	45.19	24.83	127.50
		5	TG507	174.30	49.44	25.41	52.69	28.66	159.00
8	4	1	TG108	61.80	18.90	11.68	21.20	13.98	37.50
		2	TG208	69.30	26.87	15.51	29.50	18.15	75.00
		3	TG308	102.90	34.82	19.34	37.80	22.31	112.50
		4	TG408	150.30	46.64	23.72	50.01	27.10	150.00
		5	TG508	193.30	54.59	27.55	58.31	31.27	187.50
9	5	1	TG109	68.20	20.66	12.65	23.15	15.14	43.00
		2	TG209	79.10	29.38	16.77	32.23	19.65	86.00
		3	TG309	119.30	38.08	20.89	41.35	24.16	129.00
		4	TG409	157.50	51.04	25.57	54.77	29.31	172.50
		5	TG509	208.80	59.74	29.69	63.87	33.82	215.50
TwinLine-G floor-standing cabinets ⏚⧈									
		1	TG112	64.00	26.17	15.78	28.89	18.50	60.00
		2	TG212	113.00	40.22	23.81	43.73	27.31	120.00
12	8	3	TG312	162.60	51.87	29.54	56.17	33.84	180.00
		4	TG412	202.10	69.40	36.27	74.59	41.46	240.00
		5	TG512	230.80	80.19	41.11	86.17	47.09	300.00

* General remarks on the determination of the power loss: Values according to DIN EN 61439-1 section 10.10.4.2.2; ambient temperature 35°C, internal temperature 55°C, the allowed device temperature must not be exceeded, levelling of the place of installation ≤ 2000 m altitude; internal form of separation = 1; side walls not covered

TwinLine-L, cabinet depth 275 mm,

Front view
Wall-mounting and floor-standing cabinet
External/internal dimensions



Front view
Wall-mounting cabinet
Wall fastening dimensions



Front view
Floor-standing cabinet
Wall fastening dimensions

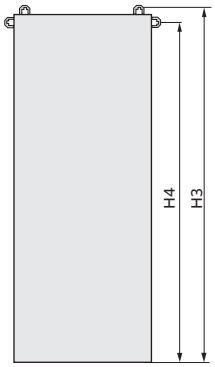

Front view
External fastening
Detail



Side view
With/without door



Height		Width		External dimensions in mm		Internal dimensions in mm		External dimensions with flange knockout in mm		Wall fastening dimensions in mm			
GU	**OH**	**PW**	**Type**	**H1**	**W1**	**H2**	**W2**	**H**	**W**	**H3**	**W3**	**H4**	**W4**
TwinLine-L wall-mounting cabinets ⏚▣													
4	0	1	TL104	650	300	602	252	654	304	693.5	328	542	192
		2	TL204	650	550	602	502	654	554	693.5	578	542	442
		3	TL304	650	800	602	752	654	804	693.5	828	542	692
		4	TL404	650	1050	602	1002	654	1054	693.5	1078	542	942
		5	TL504	650	1300	602	1252	654	1304	693.5	1328	542	1192
5	1	1	TL105	800	300	752	252	804	304	843.5	328	692	192
		2	TL205	800	550	752	502	804	554	843.5	578	692	442
		3	TL305	800	800	752	752	804	804	843.5	828	692	692
		4	TL405	800	1050	752	1002	804	1054	843.5	1078	692	942
		5	TL505	800	1300	752	1252	804	1304	843.5	1328	692	1192
6	2	1	TL106	950	300	902	252	954	304	993.5	328	842	192
		2	TL206	950	550	902	502	954	554	993.5	578	842	442
		3	TL306	950	800	902	752	954	804	993.5	828	842	692
		4	TL406	950	1050	902	1002	954	1054	993.5	1078	842	942
		5	TL506	950	1300	902	1252	954	1304	993.5	1328	842	1192
7	3	1	TL107	1100	300	1052	252	1104	304	1143.5	328	992	192
		2	TL207	1100	550	1052	502	1104	554	1143.5	578	992	442
		3	TL307	1100	800	1052	752	1104	804	1143.5	828	992	692
		4	TL407	1100	1050	1052	1002	1104	1054	1143.5	1078	992	942
		5	TL507	1100	1300	1052	1252	1104	1304	1143.5	1328	992	1192
8	4	1	TL108	1250	300	1202	252	1254	304	1293.5	328	1142	192
		2	TL208	1250	550	1202	502	1254	554	1293.5	578	1142	442
		3	TL308	1250	800	1202	752	1254	804	1293.5	828	1142	692
		4	TL408	1250	1050	1202	1002	1254	1054	1293.5	1078	1142	942
		5	TL508	1250	1300	1202	1252	1254	1304	1293.5	1328	1142	1192
9	5	1	TL109	1400	300	1352	252	1404	304	1443.5	328	1292	192
		2	TL209	1400	550	1352	502	1404	554	1443.5	578	1292	442
		3	TL309	1400	800	1352	752	1404	804	1443.5	828	1292	692
		4	TL409	1400	1050	1352	1002	1404	1054	1443.5	1078	1292	942
		5	TL509	1400	1300	1352	1252	1404	1304	1443.5	1328	1292	1192
TwinLine-L floor-standing cabinets ⏚▣													
12	8	1	TL112	1850	300	1802	252	1854	304	1872	328	1796	192
		2	TL212	1850	550	1802	502	1854	554	1872	578	1796	442
		3	TL312	1850	800	1802	752	1854	804	1872	828	1796	692
		4	TL412	1850	1050	1802	1002	1854	1054	1872	1078	1796	942
		5	TL512	1850	1300	1802	1252	1854	1304	1872	1328	1796	1192

> Dimensions in mm

Quick product references

Overall dimensions

TwinLine-L, cabinet depth 275 mm .,

Type of installation
Cabinet to the wall

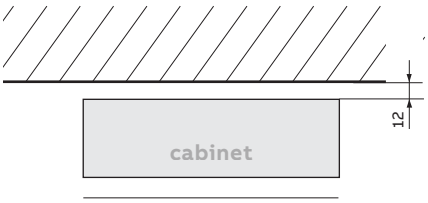

Type of installation
Cabinet combination
in series



Type of installation
Cabinet combination
on top of each other



Height		Width	Type	⏚/▣ Power loss in Watt* $\triangle t_{1.0}$ 20K	⏚ Cabinet weight in kg		▣ Cabinet weight in kg		max. installation weight
GU	OH	PW			With door	Without door	With door	Without door	in kg
TwinLine-L wall-mounting cabinets ⏚▣									
4	0	1	TL104	38.80	12.25	8.28	13.80	9.83	15.00
		2	TL204	60.80	17.23	10.97	18.94	12.72	30.00
		3	TL304	67.10	22.30	13.75	24.16	15.61	45.00
		4	TL404	89.70	29.54	17.06	31.54	19.08	60.00
		5	TL504	116.80	34.59	19.79	36.76	21.97	75.00
5	1	1	TL105	45.80	14.13	9.37	15.89	11.13	20.50
		2	TL205	70.20	19.90	12.40	21.86	14.36	41.00
		3	TL305	78.00	25.68	15.43	27.86	17.60	61.50
		4	TL405	108.90	34.08	19.03	36.45	21.38	82.50
		5	TL505	145.10	39.87	22.06	42.46	24.64	103.00
6	2	1	TL106	52.80	15.97	10.45	17.94	12.35	26.00
		2	TL206	59.90	22.53	13.78	24.75	16.00	52.50
		3	TL306	89.80	29.06	17.10	31.54	19.58	78.50
		4	TL406	128.10	38.59	21.00	41.32	23.73	105.00
		5	TL506	168.00	45.14	24.32	48.09	27.28	131.00
7	3	1	TL107	59.80	18.34	11.89	20.51	14.09	31.50
		2	TL207	65.20	25.77	15.67	28.25	18.15	63.50
		3	TL307	102.80	33.19	19.41	35.97	22.20	95.50
		4	TL407	145.70	44.10	23.74	47.19	27.14	127.50
		5	TL507	189.20	51.51	27.48	54.91	30.88	159.00
8	4	1	TL108	66.70	20.22	13.00	22.61	15.39	37.50
		2	TL208	74.40	28.40	17.04	31.14	19.78	75.00
		3	TL308	117.80	36.57	21.09	39.66	24.18	112.50
		4	TL408	163.70	48.62	25.70	52.14	29.22	150.00
		5	TL508	207.70	56.79	29.75	60.65	33.61	187.50
9	5	1	TL109	52.20	22.39	14.09	24.69	16.68	43.00
		2	TL209	86.00	31.03	18.42	34.03	21.42	86.00
		3	TL309	126.00	39.95	22.76	43.35	26.16	129.00
		4	TL409	179.10	53.14	27.68	57.02	31.55	172.50
		5	TL509	222.10	62.05	32.01	66.34	36.29	215.50
TwinLine-L floor-standing cabinets ⏚▣									
12	8	1	TL112	69.60	27.96	17.57	30.84	20.45	60.00
		2	TL212	120.90	42.23	25.81	45.91	29.49	120.00
		3	TL312	171.90	54.09	31.76	58.58	36.24	180.00
		4	TL412	207.00	71.86	38.72	77.25	44.12	240.00
		5	TL512	250.30	83.46	44.37	89.66	50.57	300.00

* General remarks on the determination of the power loss: Values according to DIN EN 61439-1, section 10.10.4.2.2; ambient temperature 35°C, internal temperature 55°C, the allowed device temperature must not be exceeded, levelling of the place of installation ≤ 2000 m altitude; internal form of separation = 1; side walls not covered

TwinLine-W, cabinet depth 350 mm,

Front view
Wall-mounting and floor-standing cabinet
External/internal dimensions

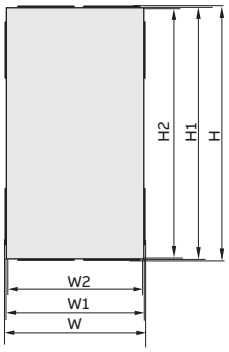

Front view
Wall-mounting cabinet
Wall fastening dimensions



Front view
Floor-standing cabinet
Wall fastening dimensions

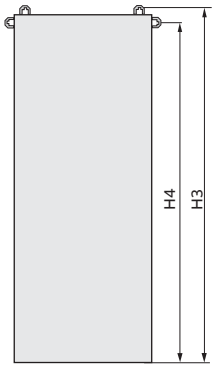

Front view
External fastening
Detail



Side view
With/without door



Height		Width		External dimensions in mm		Internal dimensions in mm		External dimensions with flange knockout in mm		Wall fastening dimensions in mm			
GU	OH	PW	Type	H1	W1	H2	W2	H	W	H3	W3	H4	W4
TwinLine-W wall-mounting cabinets ⏚▣													
4	0	1	TW104	650	300	602	252	654	304	693.5	328	542	192
		2	TW204	650	550	602	502	654	554	693.5	578	542	442
		3	TW304	650	800	602	752	654	804	693.5	828	542	692
		4	TW404	650	1050	602	1002	654	1054	693.5	1078	542	942
		5	TW504	650	1300	602	1252	654	1304	693.5	1328	542	1192
5	1	1	TW105	800	300	752	252	804	304	843.5	328	692	192
		2	TW205	800	550	752	502	804	554	843.5	578	692	442
		3	TW305	800	800	752	752	804	804	843.5	828	692	692
		4	TW405	800	1050	752	1002	804	1054	843.5	1078	692	942
		5	TW505	800	1300	752	1252	804	1304	843.5	1328	692	1192
6	2	1	TW106	950	300	902	252	954	304	993.5	328	842	192
		2	TW206	950	550	902	502	954	554	993.5	578	842	442
		3	TW306	950	800	902	752	954	804	993.5	828	842	692
		4	TW406	950	1050	902	1002	954	1054	993.5	1078	842	942
		5	TW506	950	1300	902	1252	954	1304	993.5	1328	842	1192
7	3	1	TW107	1100	300	1052	252	1104	304	1143.5	328	992	192
		2	TW207	1100	550	1052	502	1104	554	1143.5	578	992	442
		3	TW307	1100	800	1052	752	1104	804	1143.5	828	992	692
		4	TW407	1100	1050	1052	1002	1104	1054	1143.5	1078	992	942
		5	TW507	1100	1300	1052	1252	1104	1304	1143.5	1328	992	1192
8	4	1	TW108	1250	300	1202	252	1254	304	1293.5	328	1142	192
		2	TW208	1250	550	1202	502	1254	554	1293.5	578	1142	442
		3	TW308	1250	800	1202	752	1254	804	1293.5	828	1142	692
		4	TW408	1250	1050	1202	1002	1254	1054	1293.5	1078	1142	942
		5	TW508	1250	1300	1202	1252	1254	1304	1293.5	1328	1142	1192
9	5	1	TW109	1400	300	1352	252	1404	304	1443.5	328	1292	192
		2	TW209	1400	550	1352	502	1404	554	1443.5	578	1292	442
		3	TW309	1400	800	1352	752	1404	804	1443.5	828	1292	692
		4	TW409	1400	1050	1352	1002	1404	1054	1443.5	1078	1292	942
		5	TW509	1400	1300	1352	1252	1404	1304	1443.5	1328	1292	1192
TwinLine-W floor-standing cabinets ⏚▣													
12	8	1	TW112	1850	300	1802	252	1854	304	1872	328	1796	192
		2	TW212	1850	550	1802	502	1854	554	1872	578	1796	442
		3	TW312	1850	800	1802	752	1854	804	1872	828	1796	692
		4	TW412	1850	1050	1802	1002	1854	1054	1872	1078	1796	942
		5	TW512	1850	1300	1802	1252	1854	1304	1872	1328	1796	1192
		6	TW612	1850	1550	1802	1502	1854	1554	1872	1578	1796	1442

Quick product references

Overall dimensions

TwinLine-W, cabinet depth 350 mm

Type of installation
Cabinet to the wall

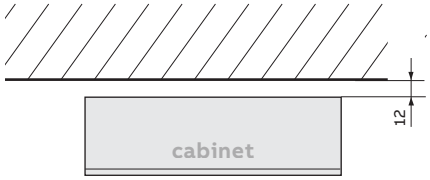

Type of installation
Cabinet combination in series



Type of installation
Cabinet combination on top of each other



Height		Width		⏚/⧈ Power loss in Watt*	⏚ Cabinet weight in kg		⧈ Cabinet weight in kg		max. installation weight
GU	OH	PW	Type	$\triangle t_{1.0}$ 20K	With door	Without door	With door	Without door	in kg
TwinLine-W wall-mounting cabinets ⏚⧈									
4	0	1	TW104	43.00	13.50	9.47	15.13	11.16	15.00
		2	TW204	65.90	18.79	12.58	20.60	14.38	30.00
		3	TW304	75.90	24.17	15.62	26.16	17.61	45.00
		4	TW404	100.10	31.76	19.27	33.92	21.44	60.00
		5	TW504	129.30	37.12	22.32	39.46	24.66	75.00
5	1	1	TW105	50.50	15.56	10.80	17.41	12.65	20.50
		2	TW205	59.80	21.64	14.14	23.72	16.21	41.00
		3	TW305	87.70	27.74	17.48	30.04	19.78	61.50
		4	TW405	121.30	36.47	21.42	39.00	23.95	82.50
		5	TW505	158.90	42.58	24.77	45.33	27.52	103.00
6	2	1	TW106	58.20	17.58	12.06	19.65	14.13	26.00
		2	TW206	68.20	24.44	15.69	26.79	18.04	52.50
		3	TW306	102.80	31.29	19.33	33.91	21.95	78.50
		4	TW406	144.80	41.16	23.57	44.06	26.46	105.00
		5	TW506	185.80	48.02	27.20	51.19	30.07	131.00
7	3	1	TW107	65.80	20.12	13.70	22.41	15.99	31.50
		2	TW207	75.70	27.87	17.76	30.48	20.38	63.50
		3	TW307	116.50	35.59	21.82	38.53	24.76	95.50
		4	TW407	163.60	46.84	26.48	50.11	29.75	127.50
		5	TW507	209.30	54.58	30.55	58.16	34.13	159.00
8	4	1	TW108	52.00	22.18	14.96	24.81	17.48	37.50
		2	TW208	82.70	30.67	19.32	33.56	22.20	75.00
		3	TW308	132.60	39.15	23.67	42.42	26.93	112.50
		4	TW408	180.80	51.55	28.63	55.25	32.33	150.00
		5	TW508	227.50	60.03	32.98	64.10	37.06	187.50
9	5	1	TW109	58.60	24.23	16.22	26.96	18.95	43.00
		2	TW209	93.90	33.48	20.87	36.63	24.03	86.00
		3	TW309	146.40	42.71	25.52	46.29	29.10	129.00
		4	TW409	197.10	56.24	30.77	60.32	34.85	172.50
		5	TW509	238.20	65.47	35.42	69.97	39.93	215.50
TwinLine-W floor-standing cabinets ⏚⧈									
12	8	1	TW112	78.90	30.62	20.24	33.72	23.33	60.00
		2	TW212	131.70	45.10	28.69	49.02	32.60	120.00
		3	TW312	181.50	57.38	35.05	62.12	39.79	180.00
		4	TW412	226.00	75.29	42.15	80.95	47.82	240.00
		5	TW512	269.40	87.20	48.12	93.70	54.61	300.00
		6	TW612	354.50	99.02	53.98	106.34	61.30	360.00

* General remarks on the determination of the power loss: Values according to DIN EN 61439-1, section 10.10.4.2.2; ambient temperature 35°C, internal temperature 55°C, the allowed device temperature must not be exceeded, levelling of the place of installation ≤ 2000 m altitude; internal form of separation = 1; side walls not covered

Quick product references

Overall dimensions

TwinLine plinth, height 50 mm

External/internal dimensions

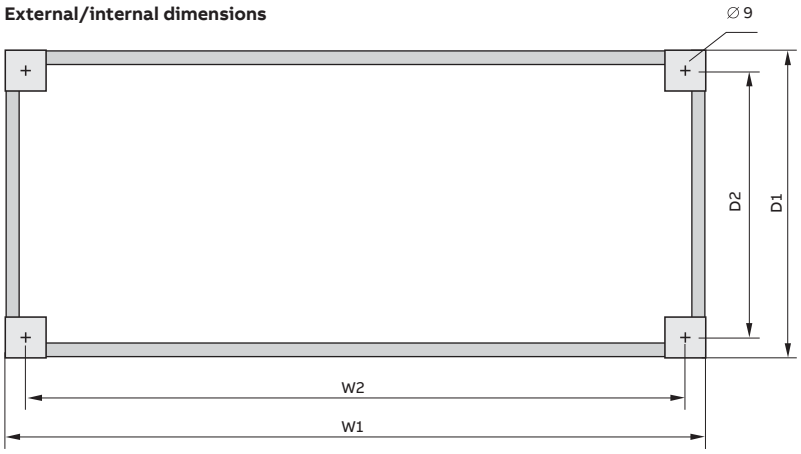

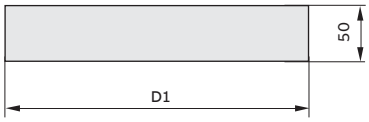

Height	Depth	Width		External dimensions Width x depth in mm		Internal dimensions Width x depth in mm		Weight
mm	mm	PW	Type	W1	D1	W2	D2	in kg
TwinLine-G, plinth 50 mm								
50	225	1	TZG105	300	203.5	270	173.5	1.37
		2	TZG205	550	203.5	520	173.5	1.91
		3	TZG305	800	203.5	770	173.5	3.14
		4	TZG405	1050	203.5	1020	173.5	2.93
		5	TZG505	1300	203.5	1270	173.5	3.44
TwinLine-L, plinth 50 mm								
50	275	1	TZL105	300	253.5	270	223.5	1.49
		2	TZL205	550	253.5	520	223.5	2.03
		3	TZL305	800	253.5	770	223.5	2.54
		4	TZL405	1050	253.5	1020	223.5	3.34
		5	TZL505	1300	253.5	1270	223.5	5.78
TwinLine-W, plinth 50 mm								
50	350	1	TZW105	300	328.5	270	298.5	1.67
		2	TZW205	550	328.5	520	298.5	2.21
		3	TZW305	800	328.5	770	298.5	2.72
		4	TZW405	1050	328.5	1020	298.5	5.03
		5	TZW505	1300	328.5	1270	298.5	5.97
		6	TZW605	1550	328.5	1520	298.5	6.90

Quick product references

Overall dimensions

TwinLine plinth, height 100 mm

External/internal dimensions

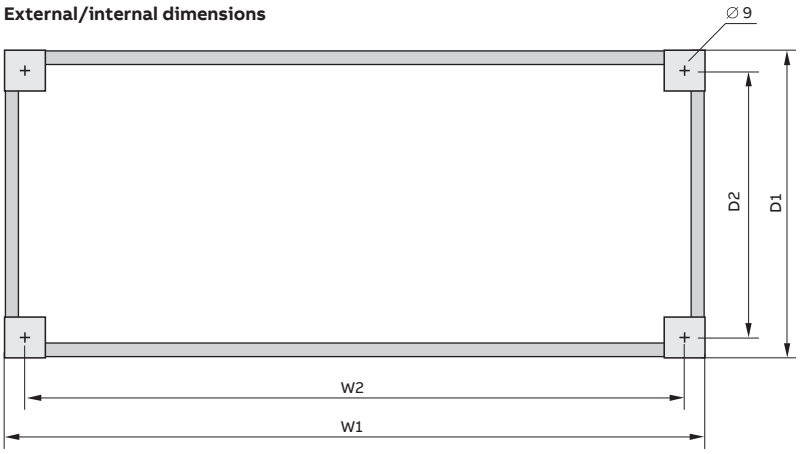

Detail view for side knockout

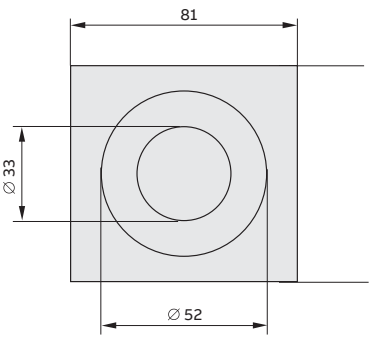

View side knockout TwinLine-G and -L

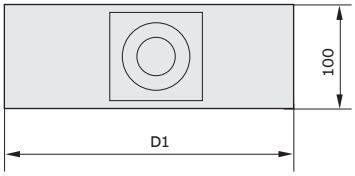

View side knockout TwinLine-W

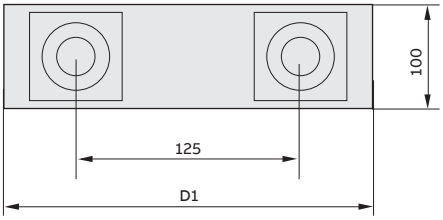

Height	Depth	Width		External dimensions Width x depth in mm		Internal dimensions Width x depth in mm		Weight
mm	mm	PW	Type	W1	D1	W2	D2	in kg
TwinLine-G, plinth 100 mm								
100	225	1	TZG110	300	203.5	270	173.5	2.22
		2	TZG210	550	203.5	520	173.5	3.06
		3	TZG310	800	203.5	770	173.5	3.87
		4	TZG410	1050	203.5	1020	173.5	4.67
		5	TZG510	1300	204.5	1270	173.5	5.47
TwinLine-L, plinth 100 mm								
100	275	1	TZL110	300	253.5	270	223.5	2.41
		2	TZL210	550	253.5	520	223.5	3.24
		3	TZL310	800	253.5	770	223.5	4.05
		4	TZL410	1050	253.5	1020	223.5	6.71
		5	TZL510	1300	254.5	1270	223.5	7.95
TwinLine-W, plinth 100 mm								
100	350	1	TZW110	300	328.5	270	298.5	2.68
		2	TZW210	550	328.5	520	298.5	3.52
		3	TZW310	800	328.5	770	298.5	4.32
		4	TZW410	1050	328.5	1020	298.5	6.98
		5	TZW510	1300	329.5	1270	298.5	8.22
		6	TZW610	1550	329.5	1520	298.5	9.45

Quick product references

Overall dimensions

TwinLine doors, height 4 up to 7 GU

External dimensions
For all cabinets of a width of 4 panels and more
Double-wing doors



Usable connection area
For all cabinets of a width of 4 panels and more
Double-wing doors

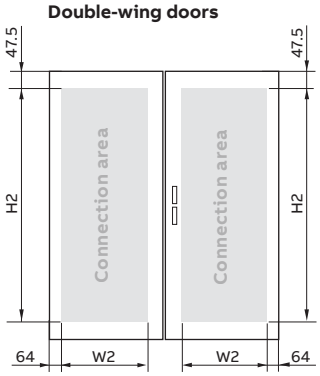

Height		Width			External dimensions Height x width in mm		External dimensions Height x width in mm		Weight
GU	OH	PW	Type	Remark	H1	W1	H2	W2	in kg
TwinLine wall-mounting cabinets, doors									
4	0	1	TZB104		643	289	548	123	5.46
		2	TZB204		643	539	548	373	7.75
		3	TZB304		643	789	548	623	10.11
		4*[1]	TZB204L	Door left	643	526 *[2]	548	373	7.77
			TZB204R	Door right	643	539	548	373	7.78
		5*[1]	TZB304L	Door left	643	776 *[2]	548	623	10.11
			TZB204R	Door right	643	539	548	373	7.78
5	1	1	TZB105		793	289	698	123	6.27
		2	TZB205		793	539	698	373	9.05
		3	TZB305		793	789	698	623	11.85
		4*[1]	TZB205L	Door left	793	526 *[2]	698	373	9.10
			TZB205R	Door right	793	539	698	373	9.05
		5*[1]	TZB305L	Door left	793	776 *[2]	698	623	11.89
			TZB205R	Door right	793	539	698	373	9.05
6	2	1	TZB106		943	289	848	123	7.03
		2	TZB206		943	539	848	373	10.32
		3	TZB306		943	789	848	623	13.58
		4*[1]	TZB206L	Door left	943	526 *[2]	848	373	10.41
			TZB206R	Door right	943	539	848	373	10.32
		5*[1]	TZB306L	Door left	943	776 *[2]	848	623	13.68
			TZB206R	Door right	943	539	848	373	10.32
7	3	1	TZB107		1093	289	998	123	7.94
		2	TZB207		1093	539	998	373	11.69
		3	TZB307		1093	789	998	623	15.42
		4*[1]	TZB207L	Door left	1093	526 *[2]	998	373	11.85
			TZB207R	Door right	1093	539	998	373	11.69
		5*[1]	TZB307L	Door left	1093	776 *[2]	998	623	15.57
			TZB207R	Door right	1093	539	998	373	11.69

[1] 4 or more panels wide: double-wing doors
*[2] Dimensions incl. central door bar

Quick product references

Overall dimensions

TwinLine doors, height 8 up to 12 GU

External dimensions
For all cabinets of a width of 4 panels and more
Double-wing doors



Usable connection area
For all cabinets of a width of 4 panels and more
Double-wing doors

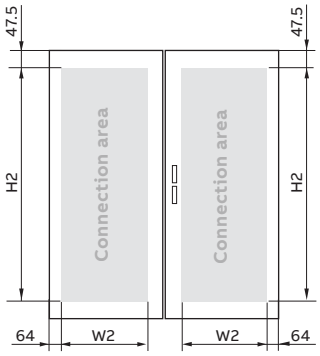

Height		Width			External dimensions Height x width in mm		External dimensions Height x width in mm		Weight
GU	OH	PW	Type	Remark	H1	W1	H2	W2	in kg
TwinLine wall-mounting cabinets, doors									
8	4	1	TZB108		1243	289	1148	123	8.75
		2	TZB208		1243	539	1148	373	12.96
		3	TZB308		1243	789	1148	623	17.15
		4*	TZB208L	Door left	1243	526 *2	1148	373	13.17
			TZB208R	Door right	1243	539	1148	373	12.96
		5*	TZB308L	Door left	1243	776 *2	1148	623	17.36
			TZB208R	Door right	1243	539	1148	373	12.96
9	5	1	TZB109		1393	289	1298	123	9.55
		2	TZB209		1393	539	1298	373	14.23
		3	TZB309		1393	789	1298	623	18.88
		4*	TZB209L	Door left	1393	526 *2	1298	373	14.49
			TZB209R	Door right	1393	539	1298	373	14.23
		5*	TZB309L	Door left	1393	776 *2	1298	623	19.14
			TZB209R	Door right	1393	539	1298	373	14.23
TwinLine floor-standing cabinets, doors									
12	8	1	TZB112		1843	289	1748	123	11.96
		2	TZB212		1843	539	1748	373	18.07
		3	TZB312		1843	789	1748	623	24.08
		4*	TZB212L	Door left	1843	526 *2	1748	373	18.45
			TZB212R	Door right	1843	539	1748	373	18.03
		5*	TZB312L	Door left	1843	776 *2	1748	623	24.49
			TZB212R	Door right	1843	539	1748	373	18.03
		6*	TZB312L	Door left	1843	776 *2	1748	623	24.49
			TZB312R	Door right	1843	789	1748	623	24.08

*Double-wing doors for all cabinets of a width of 4 panels and more
*2 Dimensions incl. central door bar

Quick product references

Overall dimensions

TwinLine Transparent doors, height 4 up to 7 GU

External dimensions
For all cabinets of a width of 4 panels and more
Double-wing doors



Dimensions of vewing area
For all cabinets of a width of 4 panels and more
Double-wing doors

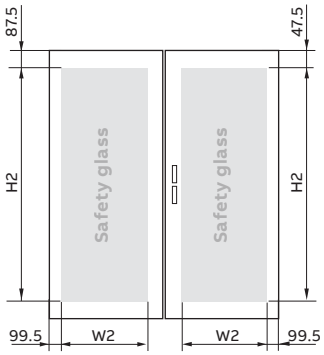

Height		Width			External dimensions Height x width in mm		Vewing area Height x width in mm		Weight
GU	**OH**	**PW**	**Type**	**Remark**	**H1**	**W1**	**H2**	**W2**	**in kg**
TwinLine wall-mounting cabinets, doors									
4	0	2	TZT204		643	539	468	340	6.40
		3	TZT304		643	789	468	590	8.70
		4*[1]	TZT204L	Door left	643	526 *[2]	468	340	6.50
			TZT204R	Door right	643	539	468	340	6.50
		5*[1]	TZT304L	Door left	643	776 *[2]	468	590	8.40
			TZT204R	Door right	643	539	468	340	6.50
5	1	2	TZT205		793	539	618	340	7.60
		3	TZT305		793	789	618	590	10.20
		4*[1]	TZT205L	Door left	793	526 *[2]	618	340	7.40
			TZT205R	Door right	793	539	618	340	7.50
		5*[1]	TZT305L	Door left	793	776 *[2]	618	590	9.90
			TZT205R	Door right	793	539	618	340	7.50
6	2	2	TZT206		943	539	768	340	8.70
		3	TZT306		943	789	768	590	11.50
		4*[1]	TZT206L	Door left	943	526 *[2]	768	340	8.50
			TZT206R	Door right	943	539	768	340	8.60
		5*[1]	TZT306L	Door left	943	776 *[2]	768	590	11.40
			TZT206R	Door right	943	539	768	340	8.60
7	3	2	TZT207		1093	539	918	340	10.00
		3	TZT307		1093	789	918	590	13.00
		4*[1]	TZT207L	Door left	1093	526 *[2]	918	340	9.70
			TZT207R	Door right	1093	539	918	340	9.80
		5*[1]	TZT307L	Door left	1093	776 *[2]	918	590	13.00
			TZT207R	Door right	1093	539	918	340	9.80

*[1] 4 or more panels wide: double-wing doors
*[2] Dimensions incl. central door bar

Quick product references

Overall dimensions

TwinLine Transparent doors, height 8 up to 12 GU

External dimensions
For all cabinets of a width of 4 panels and more Double-wing doors



Dimensions of vewing area
For all cabinets of a width of 4 panels and more Double-wing doors

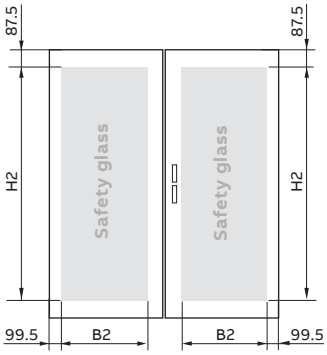

Height		Width			External dimensions Height x width in mm		Vewing area Height x width in mm		Weight
GU	OH	PW	Type	Remark	H1	W1	H2	W2	in kg
TwinLine wall-mounting cabinets, doors									
8	4	2	TZB208		1243	539	1068	340	11.10
		3	TZB308		1243	789	1068	590	14.60
		4*	TZB208L	Door left	1243	526 *²	1068	340	10.90
			TZB208R	Door right	1243	539	1068	340	11.10
		5*	TZB308L	Door left	1243	776 *²	1068	590	14.60
			TZB208R	Door right	1243	539	1068	340	11.10
9	5	2	TZB209		1393	539	1218	340	12.20
		3	TZB309		1393	789	1218	590	16.10
		4*	TZB209L	Door left	1393	526 *²	1218	340	12.00
			TZB209R	Door right	1393	539	1218	340	11.50
		5*	TZB309L	Door left	1393	776 *²	1218	590	16.00
			TZB209R	Door right	1393	539	1218	340	11.50
TwinLine floor-standing cabinets, doors									
12	8	2	TZB212		1843	539	1668	340	15.60
		3	TZB312		1843	789	1668	590	20.70
		4*	TZB212L	Door left	1843	526 *²	1668	340	15.60
			TZB212R	Door right	1843	539	1668	340	15.40
		5*	TZB312L	Door left	1843	776 *²	1668	590	20.70
			TZB212R	Door right	1843	539	1668	340	15.40
		6*	TZB312L	Door left	1843	776 *²	1668	590	20.70
			TZB312R	Door right	1843	789	1668	590	19.90

*Double-wing doors for all cabinets of a width of 4 panels and more
*² Dimensions incl. central door bar

Quick product references

Overall dimensions

TwinLine mounting plates

External dimensions / Usable connection area
Mounting plate



Height		Width		External dimensions in mm		Connection area in mm		Weight
GU	OH	PW	Type	H	W	H1	W1	in kg
Mounting plates for TwinLine wall-mounting cabinets ⏚								
4	0	1	TZM104	600	246	522	160	3.51
		2	TZM204	600	496	522	410	5.79
		3	TZM304	600	746	522	660	8.07
		4	TZM404	600	996	522	910	10.35
		5	TZM504	600	1246	522	1160	12.62
5	1	1	TZM105	750	246	672	160	4.43
		2	TZM205	750	496	672	410	7.30
		3	TZM305	750	746	672	660	10.17
		4	TZM405	750	996	672	910	13.03
		5	TZM505	750	1246	672	1160	15.90
6	2	1	TZM106	900	246	822	160	5.35
		2	TZM206	900	496	822	410	8.80
		3	TZM306	900	746	822	660	12.26
		4	TZM406	900	996	822	910	15.72
		5	TZM506	900	1246	822	1160	19.20
7	3	1	TZM107	1050	246	972	160	6.26
		2	TZM207	1050	496	972	410	10.31
		3	TZM307	1050	746	972	660	14.36
		4	TZM407	1050	996	972	910	18.40
		5	TZM507	1050	1246	972	1160	22.45
8	4	1	TZM108	1200	246	1122	160	7.18
		2	TZM208	1200	496	1122	410	11.82
		3	TZM308	1200	746	1122	660	16.45
		4	TZM408	1200	996	1122	910	21.09
		5	TZM508	1200	1246	1122	1160	25.72
9	5	1	TZM109	1350	246	1272	160	8.10
		2	TZM209	1350	496	1272	410	13.33
		3	TZM309	1350	746	1272	660	18.55
		4	TZM409	1350	996	1272	910	23.77
		5	TZM509	1350	1246	1272	1160	29.00
Mounting plates for TwinLine floor-standing cabinets ⏚								
12	8	1	RM18	1800	246	1722	160	10.80
		2	RM28	1800	496	1722	410	17.80
		3	RM38	1800	746	1722	660	21.00
		4	RM48	1800	996	1722	910	31.80

Quick product references

Overall dimensions

TwinLine Assembly with mounting plate

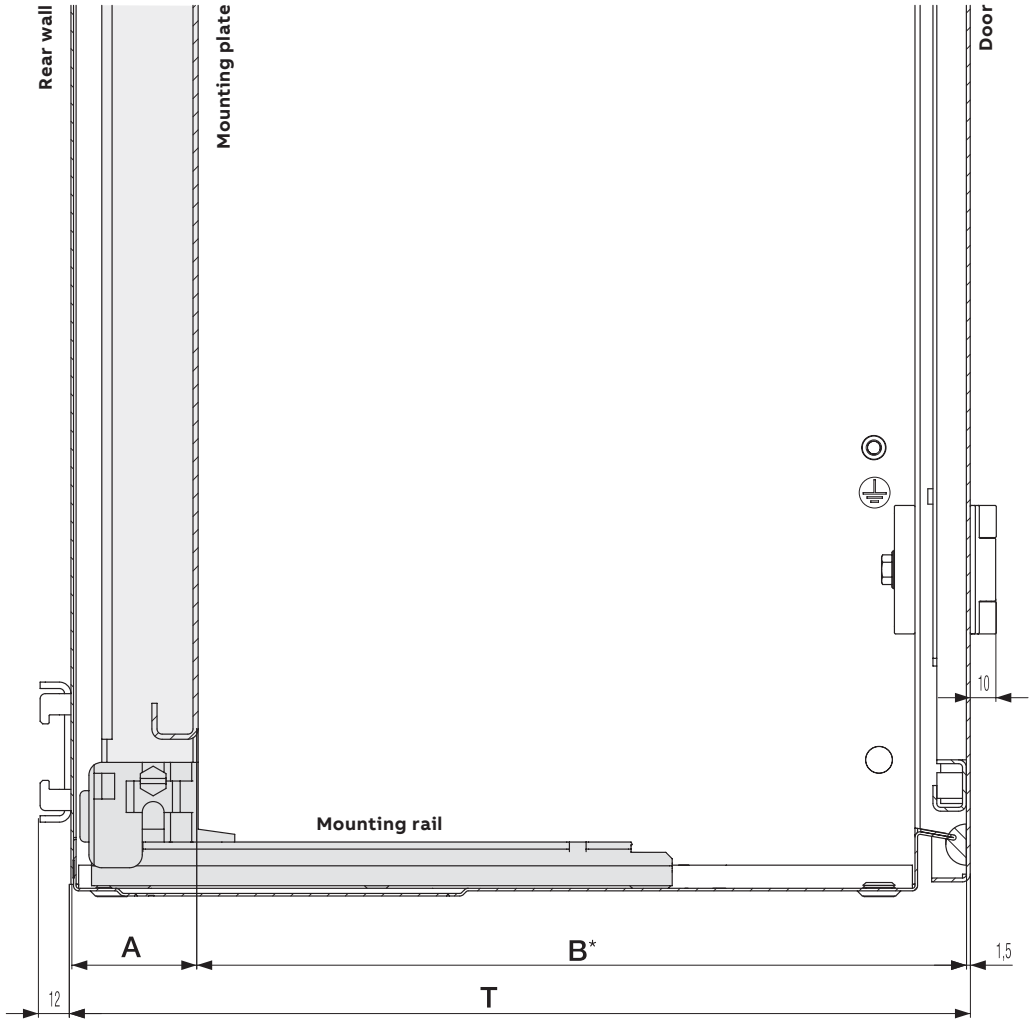

Mounting rail
Top view

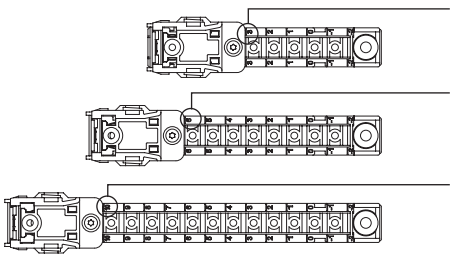

Mounting rail for TwinLine-G
Position 3 / Installation position

Mounting rail for TwinLine-L
Position 6 / Installation position

Mounting rail for TwinLine-W
Position 10 / Installation position

		A in mm for installation position												
Cabinet series	**Depth in mm**	**10**	**9**	**8**	**7**	**6**	**5**	**4**	**3**	**2**	**1**	**0**	**-1**	**-2**
TwinLine G	225	-	-	-	-	-	-	-	52.5	65	77.5	90	102.5	115
TwinLine L	275	-	-	-	-	50	62.5	75	87.5	100	112.5	125	137.5	150
TwinLine W	350	48.5	61	73.5	86	98.5	111	123.5	136	148.5	161	173.5	186	198.5
Cabinet series	**Depth in mm**	**B* in mm for installation position**												
TwinLine G	225	-	-	-	-	-	-	-	170	157.5	145	132.5	120	107.5
TwinLine L	275	-	-	-	-	222.5	210	197.5	185	172.5	160	147.5	135	122.5
TwinLine w	350	299	286.5	274	261.5	249	236.5	224	211.5	199	186.5	174	161.5	149

* Referred to the surface of the connection area; (see page155); outside the connection area this dimension is reduced by 35 mm
> Dimensions in mm

Quick product references

Overall dimensions

CombiLine modules on EDF mounting frame

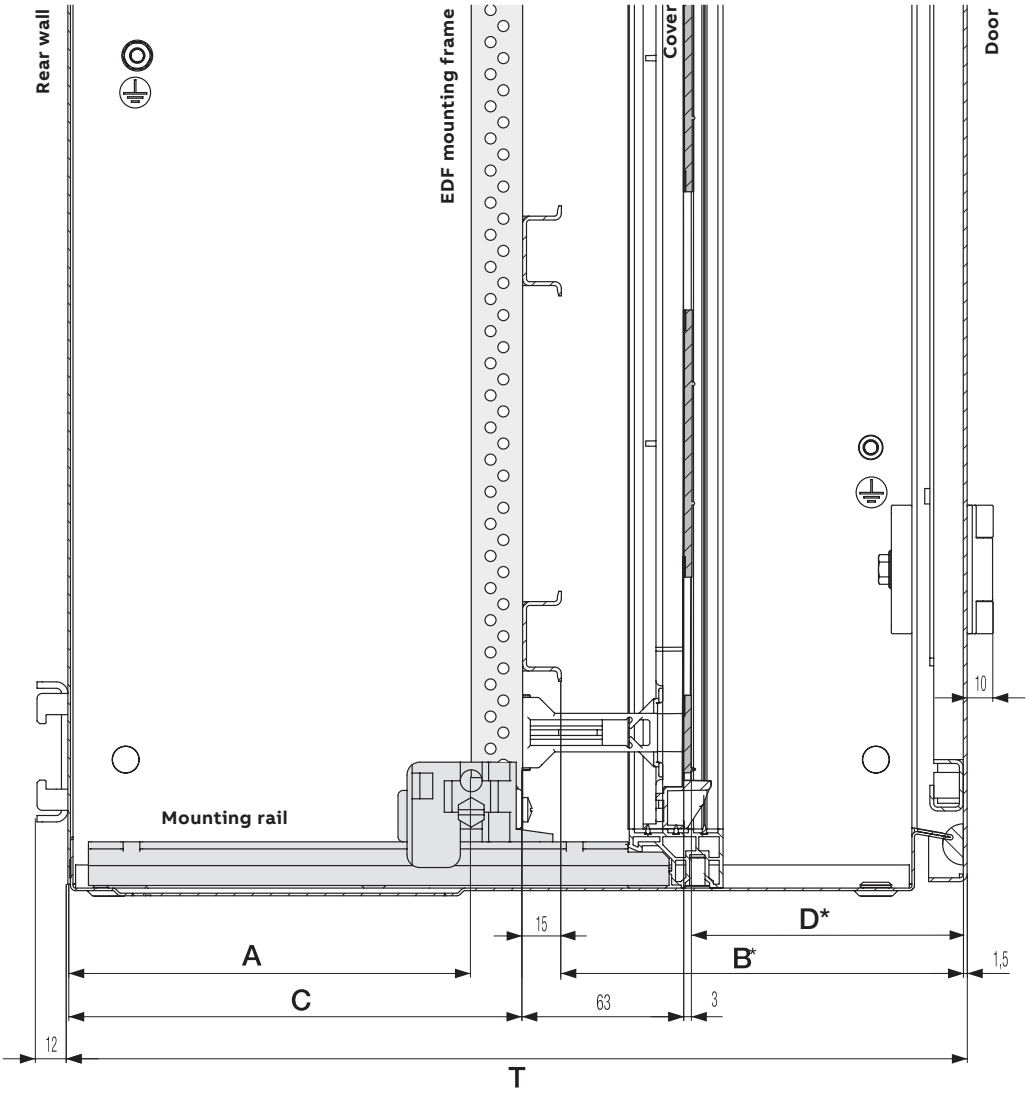

Mounting rail
Top view



Mounting rail
Position 1

Mounting rail
Position 0 / as delivered / Installation position

Mounting rail
Position -1

Cabinet series	Depth in mm	A in mm for installation part position			B in mm for installation position*			C in mm for installation position			D in mm for installation position*		
		1	0	-1	1	0	-1	1	0	-1	1	0	-1
TwinLine-G	225	60	72.5	85	127.5	115	102.5	80	92.5	105	76.5	64	51.5
TwinLine-L	275	95	107.5	120	142.5	130	117.5	115	127.5	140	91.5	79	66.5
TwinLine-W	350	143.5	156	168.5	169	156.5	144	163.5	176	188.5	117.5	105	92.5

* Referred to the surface of the connection area (see page 156); outside the connection area this dimension is reduced by 35 mm
> Dimensions in mm

Quick product references

Overall dimensions

CombiLine modules on WR mounting frame

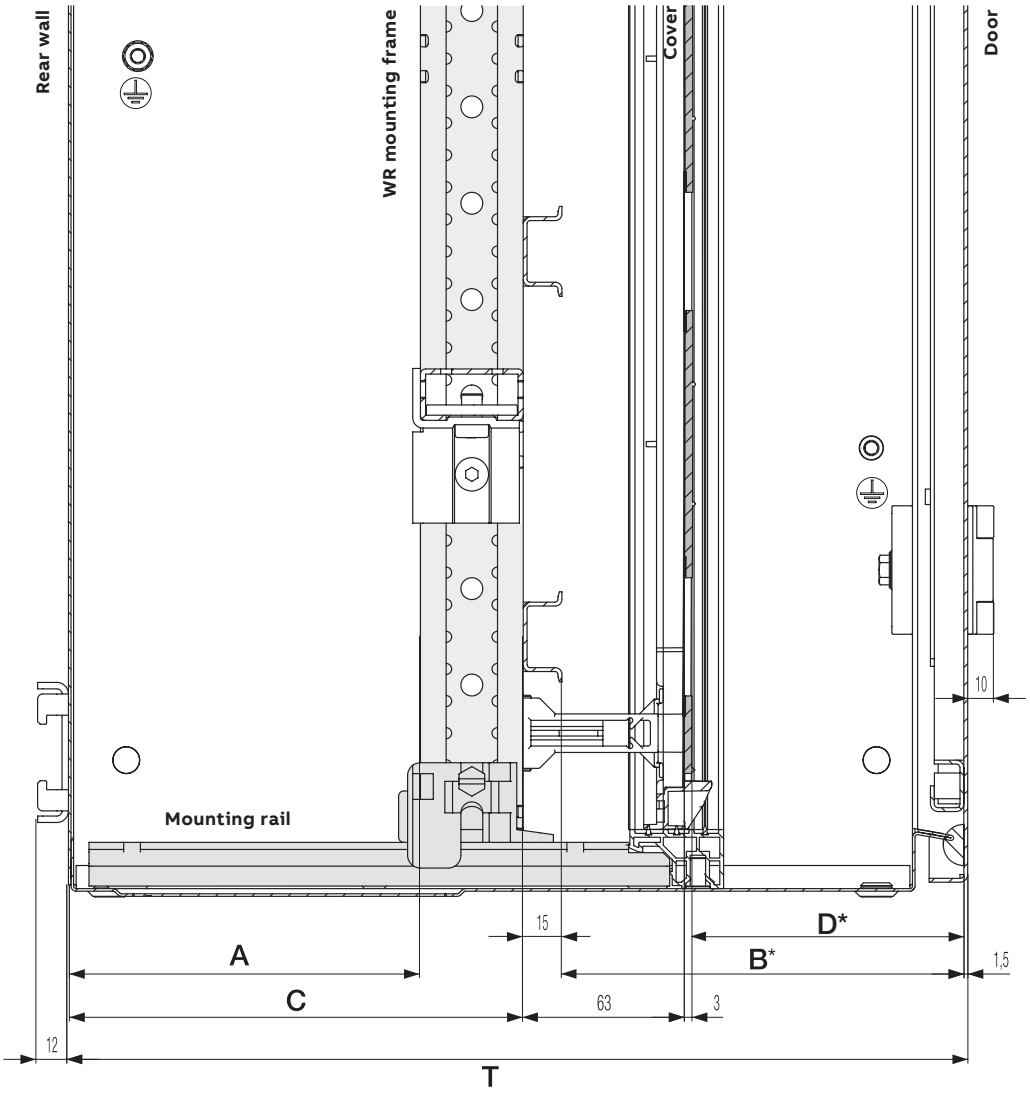

Mounting rail
Top view



Mounting rail
Position 1

Mounting rail
Position 0 / as delivered / Installation position

Mounting rail
Position -1

Schrankserie	Depth in mm	A in mm for installation part position			B in mm for installation position*			C in mm for installation position			D in mm for installation position*		
		1	0	-1	1	0	-1	1	0	-1	1	0	-1
TwinLine-G	225	40	52.5	65	127.5	115	102.5	80	92.5	105	76.5	64	51.5
TwinLine-L	275	75	87.5	100	142.5	130	117.5	115	127.5	140	91.5	79	66.5
TwinLine-W	350	123.5	136	148.5	169	156.5	144	163.5	176	188.5	117.5	105	92.5

* Referred to the surface of the connection area (see page 157); outside the connection area this dimension is reduced by 35 mm
> Dimensions in mm

Quick product references

Overall dimensions

Assembly with EDF on WR mounting frame

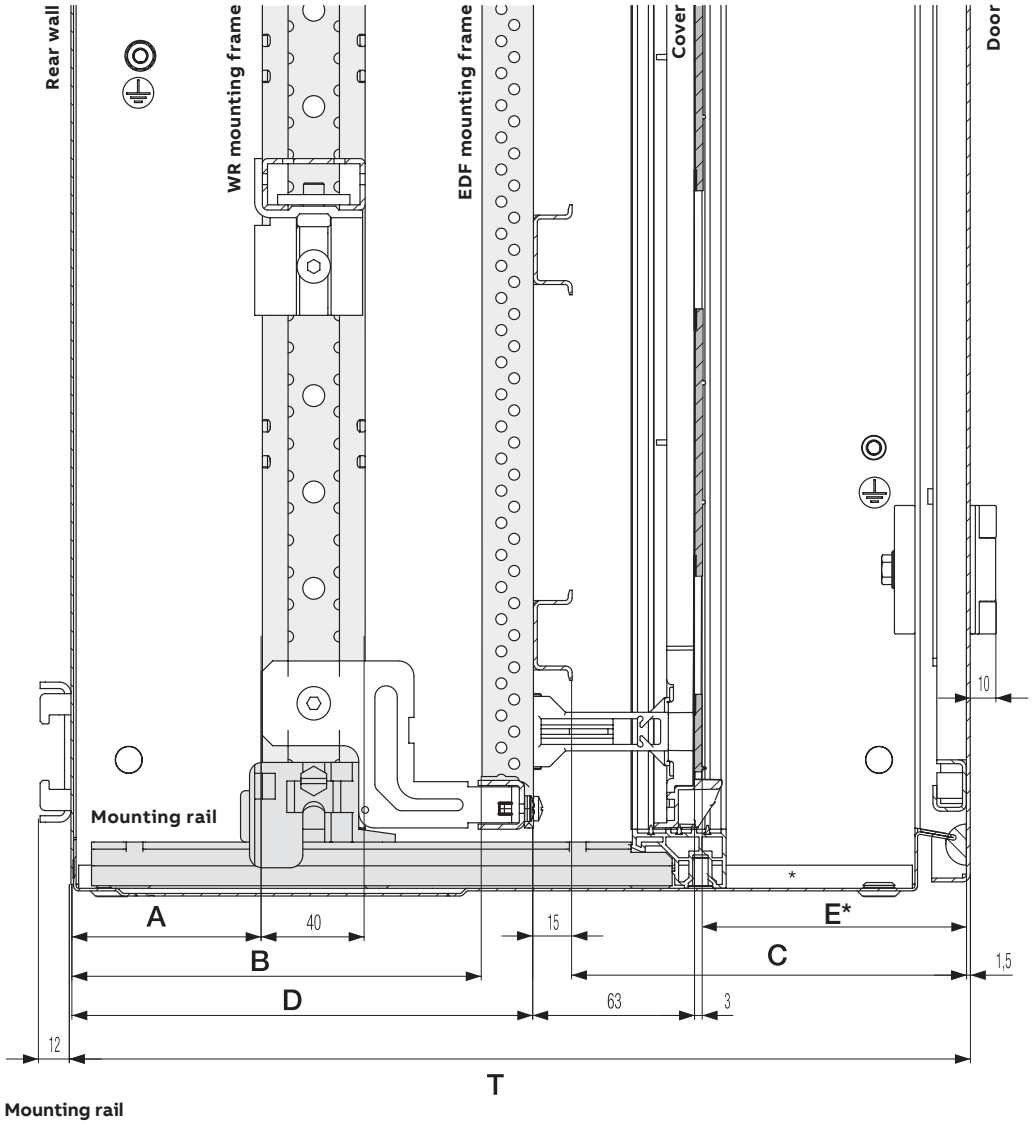

Mounting rail
Top view



Mounting rail
Position 6



Mounting rail
Position 5 / Installation position



Mounting rail
Installation osition 4

Schrankserie	Tiefe in mm	A in mm for installation part position			B in mm for installation position			C in mm for installation position*			D in mm for installation position			E in mm for installation position*		
		6	5	4	6	5	4	6	5	4	6	5	4	6	5	4
TwinLine-L	275	12.5	25	37.5	98	110.5	123	139.5	127	114.5	117.5	130	142.5	88.5	76	63.5
TwinLine-W	350	61	73.5	86	146.5	159	171.5	165.5	153	140.5	166.5	179	191.5	114.5	102	89.5

* Referred to the surface of the connection area (see page 158); outside the connection area this dimension is reduced by 35 mm
> Dimensions in mm

Quick product references

Overall dimensions

Assembly with meter panel for TwinLine-G

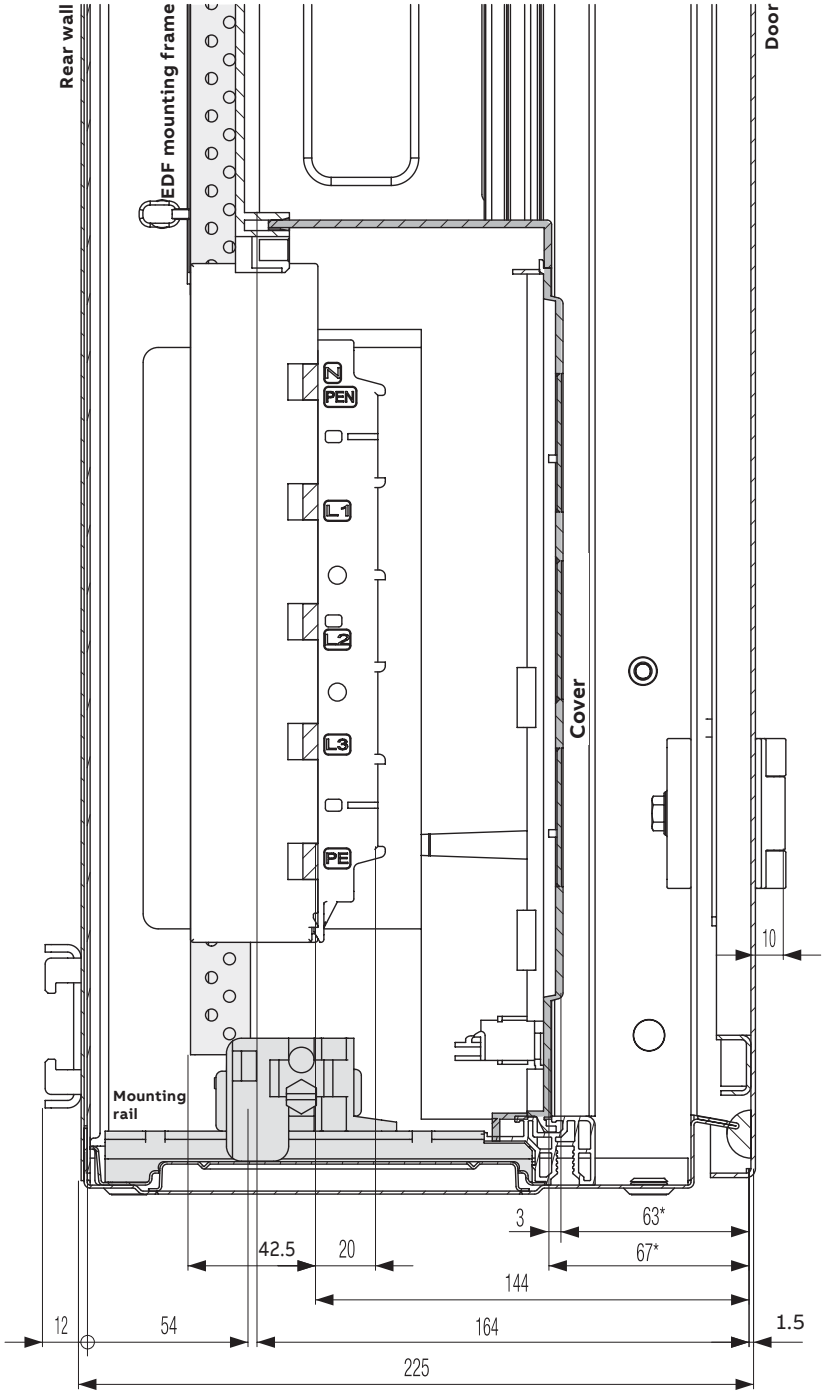

Mounting rail
Top view



Mounting rail
Position 0 / as delivered

* Referred to the surface of the connection area (see page 159); outside the connection area this dimension is reduced by 35 mm
> Dimensions in mm

Quick product references

Overall dimensions

TwinLine Top view / side flange knockout, top and bottom

TG1...
TL1...
TW1...



TG2...
TL2...
TW2...

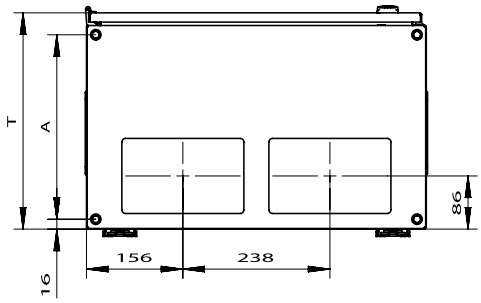

TG3...
TL3...
TW3...

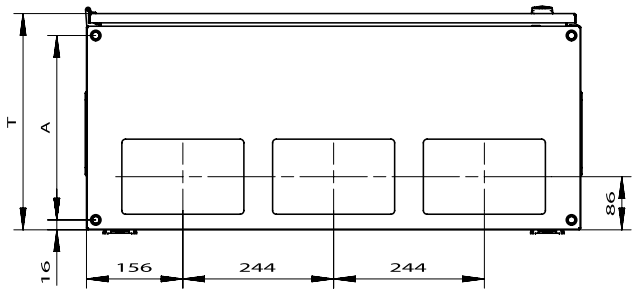

TG4...
TL4...
TW4....

TG5...
TL5...
TW5....

TG6...
TL6...
TW6....

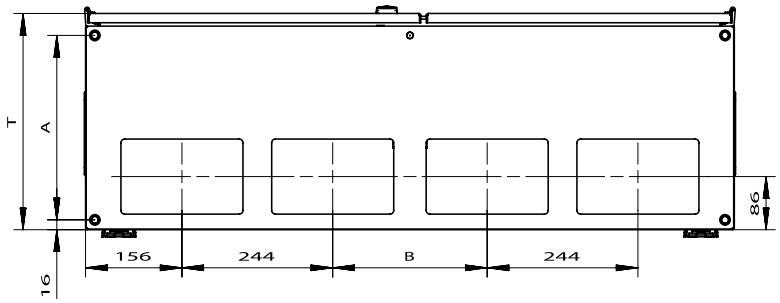

Cabinet series	Depth in mm	A in mm	B in mm / 4 panel wide	B in mm / 5 panel wide	B in mm / 6 panel wide
TwinLine-G	225	173.5	1 x 250 (250)	2 x 250 (500)	3 x 250 (750)
TwinLine-L	275	223.5			
TwinLine-W	350	298.5			

Quick product references

Overall dimensions

TwinLine Side view / side flange knockout, top and bottom

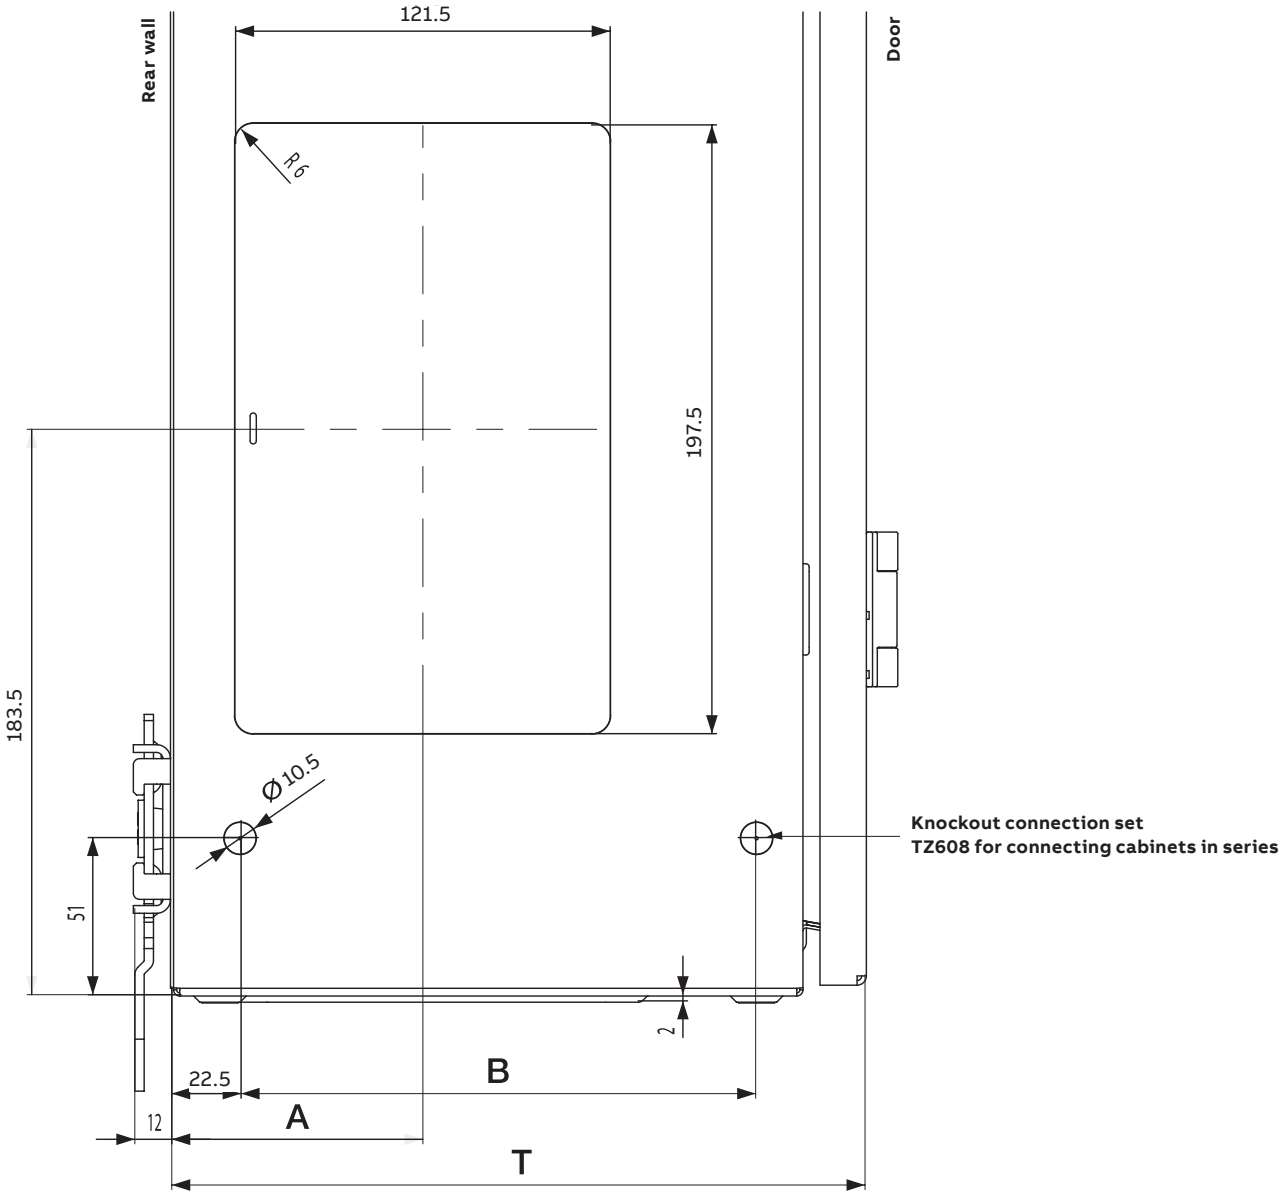

Cabinet series	Depth in mm	A in mm	B in mm
TwinLine-G	225	80.5	167
TwinLine-L	275	106.5	217
TwinLine-W	350	154.5	292

Quick product references

MCBs and RCDs worldwide marks and approvals

This is the present situation regarding worldwide marks and approvals for ABB System pro M compact range devices.
Although some products already obtained some approvals or certificates, they don't necessarily bear the related marks on the product.

For detailed list of approval, please check our product detail page and download section

The F 200 range has obtained the EPD (Environmental Product Declaration), according to ISO 14040.

EPD®
This product/service has a
CERTIFIED ENVIRONMENTAL PRODUCT DECLARATION
describing information about environmental performance, contents and recycling which has been controlled and verified by Rina according to MSR 1999:2
Registration number: S-P 00080 and S-P 00081
More information on the Internet : http//www.environdec.com

	AENOR - Spain	BBJ - Poland	BSMI - Taiwan	CCC - China	RCM - Australia
S 200	■ S 200	■ S 200	■ S 200	■ S 200	
S 200 M	■ S 200 M	■ S 200 M	■ S 200 M	■ S 200 M	
S 200 M UC					
S 200 P	■ S 200 P	■ S 200 P		■ S 200 P	
S 300 P			■ S 300 P	■ S 300 P	
S 200 U				■ S 200 U	
S 200 UP				■ S 200 UP	
S 200 UDC					
S 200 MR / S 200 PR					
SU 200 MR / SU 200 PR					
SN 201				■ SN 201	
S 200 80 - 100 A				■ S 200 80 - 100 A	
S 750 DR					
S400M				■ S400M ⑲	
S 800*				■ S 800	
F 200	■ F 200		■ F 200 ③	■ F 200 ③	
F-ATI Test					
F-ARI Test					
DDA 200					
DS 200					
DS201				■ DS201	
DS301C				■ DS301C	
DS202CR				■ DS202CR	
DS203NC				■ DS203NC	
DDA 800					
SN201-S, SN201-IH				■ SN201-S, SN201-IH	
DS401/402				■ DS401/402	
S200C				■ S200C	
SCC-IH6R / SCC-S6R				■ SCC-IH6R / SCC-S6R	
DSE201 / DSE201M					■ DSE201 / DSE201M
DSE203N M					■ DSE203N M
DSN201E					■ DSN201E
DSE201 NS					■ DSE201 NS

Legend:
■ Approved
● Waiting for approval
① Supplementary protection
② Branch circuit protection
③ Available for F200 type for overseas markets
⑤ Only DS202C M Type A and APR
The indicated approvals generally cover all available approvals worldwide. To verify the approval status in your country please contact your LSO.
* For further details on worldwide marks & approvals for specific S800 ranges please visit the dedicated download section in our websites.

CEBEC - Belgium	CERTIF - Portugal	CSA - Canada	DEMKO - Denmark	EZU - Czech Republic	FIMKO - Finland
■ S 200	■ S 200		■ S 200	■ S 200	■ S 200
■ S 200 M	■ S 200 M	■ S 200 M ①	■ S 200 M	■ S 200 M	■ S 200 M
■ S 200 P	■ S 200 P	■ S 200 P (≤ 25 A) ①	■ S 200 P	■ S 200 P	■ S 200 P
■ S 300 P	■ S 300 P	■ S 300 P ①		■ S 300 P	■ S 300 P
		■ S 200 U ②			
		■ S 200 UP ②			
		■ S 200 UDC ②			
		■ S 200 MR / S 200 PR ①			
		■ SU 200 MR / SU 200 PR ②			
■ F 200	■ F 200				■ F 200
		■ DS201 UL			
■ DS301C					

Quick product references

MCBs and RCDs worldwide marks and approvals

	IIS - Israel	IMQ - Italy	IMQ CSV - Italy	IRAM - Argentina
S 200	■ S 200	■ S 200		■ S 200
S 200 M		■ S 200 M		
S 200 M UC				
S 200 P		■ S 200 P		
S 300 P		■ S 300 P		
S 200 U				
S 200 UP				
S 200 UDC				
S 200 MR / S 200 PR				
SU 200 MR / SU 200 PR				
SN 201	■ SN 201	■ SN 201		
S 200 80 - 100 A		■ S 200 80 - 100 A		
S 750 DR				
S400M				
S 800*				
F 200	■ F 200	■ F 200		■ F 200 ③
F-ATI Test				
F-ARI Test			■ F-ARI Test	
DDA 200	■ DDA 200	■ DDA 200		
DS 200	■ DS 200	■ DS 200		
DS201	■ DS201	■ DS201		
DS301C		■ DS301C		
DS202CR		■ DS202CR		
DS203NC	■ DS203NC	■ DS203NC		
DDA 800				
F2C..				
S 290 accessories				
DS401/402				
S-ARC1		■ S-ARC1		■ S-ARC1
DS-ARC1		■ DS-ARC1		
S200C		■ S200C		■ S200C
SCC-IH6R / SCC-S6R		■ SCC-IH6R / SCC-S6R		

Legend:
■ Approved
● Waiting for approval
① Supplementary protection
② Branch circuit protection
③ Available for F200 type for overseas markets
④ Only S 500-K range
⑤ Only DS202C M Type A and APR
⑥ Not available for F200 left neutral
⑦ Only DS201 (2019) APR and DS201 neutral left series
The indicated approvals generally cover all available approvals worldwide. To verify the approval status in your country please contact your LSO.
* For further details on worldwide marks & approvals for specific S800 ranges please visit the dedicated download section in our websites.

KC- South Korea	KEMA - Netherland	LCIE - France	NEMKO - Norway	OVE - Austria
■ S 200	■ S 200	■ S 200	■ S 200	■ S 200
	■ S 200 M	■ S 200 M	■ S 200 M	■ S 200 M
	■ S 200 P	■ S 200 P	■ S 200 P	■ S 200 P
■ S 300 P	■ S 300 P	■ S 300 P	■ S 300 P	■ S 300 P
	■ SN 201	■ SN 201		
■ S 800				
	■ F 200	■ F 200		■ F 200
		■ DDA 200		
		■ DS 200		
■ DS201	■ DS201	■ DS201 ⑦		■ DS201
	■ DS301C	■ DS301C		■ DS301C
■ DS202CR		■ DS202CR		
	■ DS203NC			
■ S-ARC1				
■ DS-ARC1				
	■ S200C	■ S200C		

Quick product references

MCBs and RCDs worldwide marks and approvals

	HDB/PSB - Singapore	SABS - South Africa	SEMKO - Sweden	SEV - Switzerland
S 200	■ S 200	■ S 200	■ S 200	
S 200 M	■ S 200 M		■ S 200 M	■ S 200 M
S 200 M UC				
S 200 P			■ S 200 P	■ S 200 P
S 300 P			■ S 300 P	■ S 300 P
S 200 U				
S 200 UP				
S 200 UDC				
S 200 MR / S 200 PR				
SU 200 MR / SU 200 PR				
SN 201				
S 200 80 - 100 A		■ S 200 80 - 100 A		
S 700				
S 750 DR				
S400E				■ S400E
S400M				■ S400M
S 800*				■ S 800
F 200	■ F 200 ③	■ F 200 ③		■ F 200
F-ATI Test				
F-ARI Test				
DDA 200		■ DDA 200		
DS 200				
DS201				■ DS201
DS301C				■ DS301C
DS202CR				
DS203NC				
DSE201 - DSE201 M				
DDA 800				
DS401/402			■ DS401/402	■ DS401/402
S-ARC1				
DS-ARC1				
S200C				
SCC-IH6R / SCC-S6R				

Legend:
■ Approved
● Waiting for approval
① Supplementary protection
② Branch circuit protection
③ Available for F200 type for overseas markets
④ Only S 500-K range
⑤ Only DS202C M Type A and APR
⑥ not available for F200 left neutral
The indicated approvals generally cover all available approvals worldwide. To verify the approval status in your country please contact your LSO.
* For further details on worldwide marks & approvals for specific S800 ranges please visit the dedicated download section in our websites.

SIQ - Slovenia	SIRIM - Malaysia	UL - USA			VDE - Germany
■ S 200	■ S 200		■ S 200 ①		■ S 200
■ S 200 M	■ S 200 M	■ S 200 M ①			■ S 200 M
					■ S 200 M UC
■ S 200 P			■ S 200 P ①		■ S 200 P
			■ S 300 P ①		■ S 300 P
				■ S 200 U ②	
				■ S 200 UP ②	
				■ S 200 UDC ②	
		■ S 200 MR / S 200 PR ①			■ S 200 MR / S 200 PR
				■ SU 200 MR / SU 200 PR ②	■ SU 200 MR / SU 200 PR
					■ S 700
					■ S 750 DR
					■ S400E
					■ S400M ⑲
		■ S 800		■ S 800	■ S 800
	■ F 200 ③	■ F 200 ⑥			■ F 200
					■ F-ATI Test
					■ DS 200
		■ DS201 UL			■ DS201
					■ DS301C
					■ DS202CR
					■ DS203NC
					■ DS401/402
					■ S-ARC1
					■ DS-ARC1
					■ S200C
					■ SCC-IH6R / SCC-S6R

Quick product references

MCBs and RCDs worldwide marks and approvals

		MARINE	MARINE
		ABS	
		ABS - USA	DNV-GL - Germany
S 200		■ S 200	■ S 200
S 200 M		■ S 200 M	■ S 200 M
S 200 MUC			
S 200 P			
S 300 P			■ S 300 P
S 200 U			
S 200 UP			
S 200 UDC			
S 200 MR / S 200 PR			
SU 200 MR / SU 200 PR			
SN 201			■ SN 201
S 200 80 - 100 A			
S 700			
S 750 DR			
S400E			
S400M			■ S400M
S 800*			■ S 800
F 200			
F 204 B			
F-ATI Test			
F-ARI Test			
DDA 200			
DS 200			
DS201		■ DS201, DS201 M, DS201 M 110 V	■ DS201, DS201 M, DS201 M 110 V
DS301C			
DS202CR		■ DS202CR M, DS202CR M 110 V	■ DS202CR M, DS202CR M 110 V
DS203NC			
DSE201 - DSE201 M			■ DSE201 - DSE201 M
DS 271			
DDA 800			
S200C			

Legend:
■ Approved
● Waiting for approval
① Supplementary protection
② Branch circuit protection
③ Available for F200 type for overseas markets
⑤ Only DS202C M Type A and APR
⑥ Not available for F200 left neutral
The indicated approvals generally cover all available approvals worldwide. To verify the approval status in your country please contact your LSO.
* For further details on worldwide marks & approvals for specific S800 ranges please visit the dedicated download section in our websites.

MARINE	MARINE	MARINE
LRS - Great Britain	RINA - Italy	RMRS - Russia
■ S 200	■ S 200	■ S 200
■ S 200 M	■ S 200 M	■ S 200 M
■ S 200 P	■ S 200 P	■ S 200 P
■ S 300 P	■ S 300 P	■ S 300 P
■ S 800	■ S 800	■ S 800
	■ DDA 200 110 V	
		■ DS 200
	■ DS201 M 110 V	■ DS201, DS201 M, DS201 M 110 V
	■ DS202CR M, DS202CR M 110 V	
■ S200C	■ S200C	

Quick product references

MDRCs worldwide marks and approvals

	BSI UK	CCC China	CEBEC Belgium	ENEC Europe	IMQ Italy	KEMA Netherland	NF France	SEV Swiss
OVR		■ OVR QS for AC (CQC)					■ OVR T1-T2, T2 and T2-T3	
eOVR		■ eOVR (CQC)						
RD								
TR-TRM								
E 90		■ E90 ③, E90h ③ E90 PV*			■ E90 ③, E90h ③		■ E90 ⑤, E90h ⑥	
E90 50/125		■ E90 50/125						
E90								
E 200		■ E 200				■ E 200		
SD 200		■ SD 200				■ SD 200		
SHD 200		■ SHD 200				■ SHD 200		
E210		■ E210 ②						
ESB		■ ESB						
EN		■ EN						
E290								
E297								
E 260								
E 234		■ E 234						
AG								
DBT								
E 232								
TL Line								

Legend:
■ Approved whole range
● Waiting for approval
① Except for ESB/EN 20
② For series E219 CCC mark not needed
③ Just no LED versions
⑤ Version without neutral
⑥ Dedicated range with neutral on left
⑦ IMQ available for TM up to 30 VA
⑧ VDE available only on M1175 (standard grey version) and M1175-C (with cover)
* E90 PV 1000 V DC only

UL/CSA USA/Canada	UL/CSA USA/Canada	VDE Germany	BV/F France	GL/D Germany	LRS Great Britain	RINA Italy	RMRS Russia	KR Korea
		■ OVR T2 40 275						
■ E90 PV, E90 CC	■ E90		■ E90, E90h, E90 PV*		■ E90 ③, E90h ③	■ E90 ③, E90h ③		■ E90
	■ E90 50/125		■ E90 50/125		■ E90 50/125	■ E90 50/125		
■ E90 J								
		■ E 200						
		■ SD 200						
		■ SHD 200						
	■ E210	■ E210						
	■ ESB		■ ESB ①	■ ESB ①				
	■ EN		■ EN ①	■ EN ①				
		■ E290				■ E290 60Hz		
		■ E297						
				■ E 260				
	■ E 234							
		■ E 232						

Quick product references

MDRCs worldwide marks and approvals

	BSI UK	CCC China	CEBEC Belgium	ENEC Europe	IMQ Italy	KEMA Netherland	NF France	SEV Swiss
LCR								
SQZ3								
CT / CTA / TRFM								
MCA/MCV								
HMT								
TM					■ TM ⑦			
TS								
TS-C				■ TS-C				
TSM/TSR								
SM/RM								
M1170								
M1173					■ M1173			
M1174			■ M1174				■ M1174	
M1175								
M1363	■ M1363							
M1011								■ M1011
TM-C, TM-I, TM-S				■ TM-C, TM-I, TM-S				

Legend:
■ Approved whole range
● Waiting for approval
① Except for ESB/EN 20
② For series E219 CCC mark not needed
③ Just no LED versions
④ Dedicated range for chinese market
⑤ Version without neutral
⑥ Dedicated rang with neutral on left
⑨ E291S in preparation: will be available in 2016

	UL/CSA USA/Canada	UL/CSA USA/Canada	VDE Germany	BV/F France	GL/D Germany	LRS Great Britain	RINA Italy	RMRS Russia	KR Korea
			■ TS						
			■ M1175 ⑧						
		■ TM-C, TM-I, TM-S					■ TM-C		

new.abb.com/low-voltage

Note:
We reserve the right to make technical changes or modify the contents of this document without prior notification. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.
We reserve all rights in this document and in the subject matter and illustrations contained therein.
Any reproduction, disclosure to third parties or utilization of its contents – in whole or in part – is forbidden without prior written consent of ABB.

© Copyright 2025 ABB. All rights reserved.

9AKK107991A8329 - 11/2025