

1440915

https://www.phoenixcontact.com/in/products/1440915

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, 5-position, Pin, straight, M12, coding: B, Front mounting, Square flange, Crimp connection, 0.34 mm<sup>2</sup>

## Your advantages

- · Convenient field assembly: device connectors for fast on-site mounting
- · Contact carriers that are designed for assembly or available with preassembled litz wires
- · Standard pin assignments for signal and power transmission with a uniform design-in design

#### Commercial data

Item number	1440915
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	ABQ
Product key	ABQCED
Catalog page	Page 45 (C-2-2019)
GTIN	4046356533744
Weight per piece (including packing)	2.3 g
Weight per piece (excluding packing)	2.1 g
Customs tariff number	85366990
Country of origin	DE



1440915

https://www.phoenixcontact.com/in/products/1440915

#### Technical data

#### Notes

Notes	on	opera	tion
140103	011	opoid	LIOII

The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.

#### Safety note

#### Safety note

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only.
   The products must be regularly inspected for damage.
   Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
- Observe the corresponding technical data. You will find information:
- o On the product
- o On the packing label
- o In the supplied documentation
- o Online at phoenixcontact.com/products under the product
- Only use tools recommended by Phoenix Contact
- Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
- Ensure that the protective or functional ground has been properly connected.



1440915

https://www.phoenixcontact.com/in/products/1440915

<ul> <li>VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li> </ul>
<ul> <li>The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).</li> </ul>
Contact insert
5
1
no
В
M12
II
3
1.5 kV
≤ 3 mΩ
≥ 100 MΩ
60 V
4 A
Crimp connection
no
No
V0
PA 6.6
Pin
straight
M12
В

### Cable/line



1440915

https://www.phoenixcontact.com/in/products/1440915

Assembly note

C	able cross section	0.34 mm <sup>2</sup>		
Environmental and real-life conditions				
Amb	ient conditions			
De	Degree of protection	IP67		
		IP67		
Aı	Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)		
		-40 °C 85 °C (without mechanical actuation)		
UI	L Type Rating	Type 4 (indoor use only)		
Standards and regulations M12				
St	tandard designation	M12 connector		
St	tandards/specifications	IEC 61076-2-101		
Mounting				
М	lounting type	Front mounting Square flange 25 mm side length		


25 mm side length



1440915

https://www.phoenixcontact.com/in/products/1440915

## Drawings

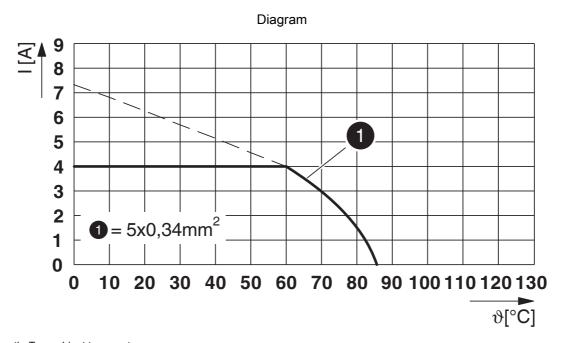


I = current strength, T = ambient temperature



1440915


https://www.phoenixcontact.com/in/products/1440915

## Schematic diagram

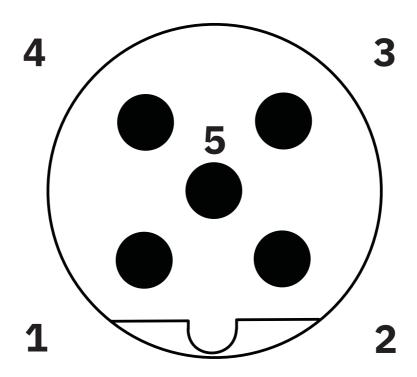

Pin assignment M12 male connector, 5-pos., B-coded, male side

## Circuit diagram

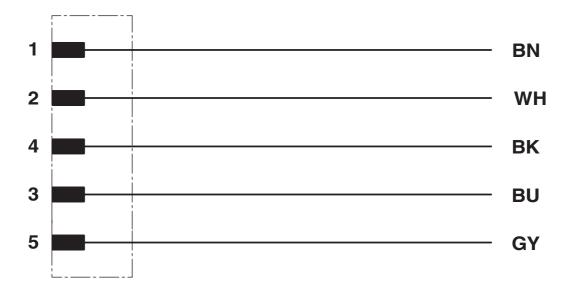

Contact assignment of the M12 plug



1440915

https://www.phoenixcontact.com/in/products/1440915

## Classifications

### **ECLASS**

	ECLASS-11.0	27440223
	ECLASS-12.0	27440116
	ECLASS-13.0	27440223
ETIM		
	ETIM 9.0	EC003557
UNSPSC		
	UNSPSC 21.0	39121400



1440915

https://www.phoenixcontact.com/in/products/1440915

## Environmental product compliance

REACH candidate substance (CAS No.)

EU RoHS			
Fulfills EU RoHS substance requirements	Yes, No exemptions		
China RoHS			
Environment friendly use period (EFUP)	EFUP-E		
	No hazardous substances above the limits		
EU REACH SVHC			

No substance above 0.1 wt%



1440915

https://www.phoenixcontact.com/in/products/1440915

#### Accessories

CC-1,0-ST-0,34-MS AU - Crimp contact

1452356

https://www.phoenixcontact.com/in/products/1452356



Crimp contact, Pin, turned, contact diameter: 1 mm, crimp range:  $0.08 \text{ mm}^2 \dots 0.5 \text{ mm}^2$ , Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1%) item no.: 1239798

### SACC-MSQ-M12MS-25-3,2 SCO - Housing screw connection

1419959

https://www.phoenixcontact.com/in/products/1419959



Housing screw connection, M12-SPEEDCON, Front mounting, square flange 25 mm side length, Square flange, potted

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd. A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420 info@phoenixcontact.co.in