

VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417

<https://www.phoenixcontact.com/in/products/1266417>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Universal varistor-based plug-in lightning/surge protective device for 3-phase power supply networks with separate N and PE (5-conductor system: L1, L2, L3, N, PE), for lightning protection levels III and IV, with remote indication contact. Cables connected via Push-in connection technology.

Your advantages

- Push-in connection technology for easy installation and uniform connection technology in the entire control cabinet
- Time savings when wiring thanks to not having to check the recommended connection torque
- Savings on additional installation materials thanks to through-wiring
- Permanent protective device monitoring due to optional remote indication contact with through-wiring

Commercial data

Item number	1266417
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	*****
Product key	CL1151
GTIN	4063151381295
Weight per piece (including packing)	605.8 g
Weight per piece (excluding packing)	222.222 g
Customs tariff number	85363030
Country of origin	DE

VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417

<https://www.phoenixcontact.com/in/products/1266417>

Technical data

Product properties

Product type	Arrester combination
Product family	VALVETRAB MS
IEC test classification	I / II
	T1 / T2
EN type	T1 / T2
IEC power supply system	TT
	TN-S
Type	DIN rail module, two-section, divisible
Number of positions	4
Surge protection fault message	Optical, remote indicator contact

Insulation characteristics

Overvoltage category	III
Pollution degree	2

Electrical properties

Nominal frequency f_N	50 Hz (60 Hz)
-------------------------	---------------

Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	Changeover contact
Operating voltage	5 V AC ... 250 V AC
	30 V DC
Operating current	5 mA AC ... 750 mA AC
	1 A DC

Connection data

Connection method	Push-in connection
Stripping length	10 mm ... 12 mm
Conductor cross section rigid	0.5 mm ² ... 10 mm ²
Conductor cross section AWG	20 ... 8
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.5 mm ² ... 6 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve	0.5 mm ² ... 10 mm ²

Remote fault indicator contact

Connection method	Push-in connection
Stripping length	10 mm
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	30 ... 12

VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417

<https://www.phoenixcontact.com/in/products/1266417>

Dimensions

Dimensional drawing	
Width	71.2 mm
Height	97.2 mm
Depth	76.6 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	4 Div.

Material specifications

Color (Base element)	gray (RAL 7042)
Color (Male connector)	light gray (RAL 7035)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6/PBT
Material group	I
Housing material	PA 6.6 PBT

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Mode of protection	L-N L-PE N-PE
Direction of action	3L-N & N-PE
Nominal voltage U_N	240/415 V AC (TN-S) 240/415 V AC (TT)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous operating voltage U_C (L-N)	335 V AC
Maximum continuous operating voltage U_C (L-PE)	335 V AC
Maximum continuous operating voltage U_C (N-PE)	264 V AC
Rated load current I_L	32 A (at 6 mm ²) 40 A (at 10 mm ²)
Residual current I_{PE}	≤ 5 μA
Standby power consumption P_C	≤ 810 mVA
Nominal discharge current I_n (8/20) μs (L-N)	12.5 kA

VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417

<https://www.phoenixcontact.com/in/products/1266417>

Nominal discharge current I_n (8/20) μ s (L-PE)	12.5 kA
Nominal discharge current I_n (8/20) μ s (N-PE)	50 kA
Maximum discharge current I_{max} (8/20) μ s	50 kA
Impulse discharge current (10/350) μ s (L-N), charge	6.25 As
Impulse discharge current (10/350) μ s (L-N), specific energy	39 kJ/ Ω
Impulse discharge current (10/350) μ s (L-N), peak current value I_{imp}	12.5 kA
Impulse discharge current (10/350) μ s (L-PE), charge	6.25 As
Impulse discharge current (10/350) μ s (L-PE), specific energy	39 kJ/ Ω
Impulse discharge current (10/350) μ s (L-PE), peak current value I_{imp}	12.5 kA
Impulse discharge current (10/350) μ s (N-PE), charge	25 As
Impulse discharge current (10/350) μ s (N-PE), specific energy	625 kJ/ Ω
Impulse discharge current (10/350) μ s (N-PE), peak current value I_{imp}	50 kA
Total discharge current I_{total} (8/20) μ s	50 kA
Total discharge current I_{total} (10/350) μ s	50 kA
Follow current interrupt rating I_{fi} (N-PE)	100 A
Short-circuit current rating I_{SCCR}	25 kA
Voltage protection level U_p (L-N)	≤ 1.2 kV ≤ 1.6 kV (30 kA - 8/20 μ s)
Voltage protection level U_p (L-PE)	≤ 2 kV
Voltage protection level U_p (N-PE)	≤ 1.7 kV
Residual voltage U_{res} (L-N)	≤ 1.2 kV (at I_n) ≤ 1.1 kV (at 10 kA) ≤ 1 kV (at 5 kA) ≤ 0.9 kV (at 3 kA)
Residual voltage U_{res} (L-PE)	≤ 2 kV (at I_n) ≤ 1.5 kV (at 10 kA) ≤ 1.2 kV (at 5 kA) ≤ 1.1 kV (at 3 kA)
Residual voltage U_{res} (N-PE)	≤ 0.6 kV (at I_n) ≤ 0.5 kV (at 10 kA) ≤ 0.5 kV (at 5 kA) ≤ 0.4 kV (at 3 kA)
TOV behavior at U_T (L-N)	415 V AC (5 s / withstand mode) 457 V AC (120 min / safe failure mode)
TOV behavior at U_T (L-PE)	415 V AC (5 s / withstand mode) 457 V AC (120 min / safe failure mode) 1657 V AC (200 ms / withstand mode)
TOV behavior at U_T (N-PE)	1200 V AC (200 ms / withstand mode)
Response time t_A (L-N)	≤ 25 ns
Response time t_A (L-PE)	≤ 100 ns

VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417

<https://www.phoenixcontact.com/in/products/1266417>

Response time t_A (N-PE)	≤ 100 ns
Max. backup fuse with V-type through wiring	32 A (gG - 6 mm ²)
	35 A (gG - 10 mm ²)
	40 A (MCB C - 10 mm ²)
Max. backup fuse with branch wiring	160 A (gG)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 2000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	25g (Half-sine / 11 ms / 3x $\pm X$, $\pm Y$, $\pm Z$)
Vibration (operation)	5g (10 ... 500 Hz / 2.5 h / X, Y, Z)

Standards and regulations

Standards/specifications	IEC 61643-11
Note	2011
Standards/specifications	EN 61643-11
Note	2012

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------


VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2

1266417


<https://www.phoenixcontact.com/in/products/1266417>

Drawings

Circuit diagram

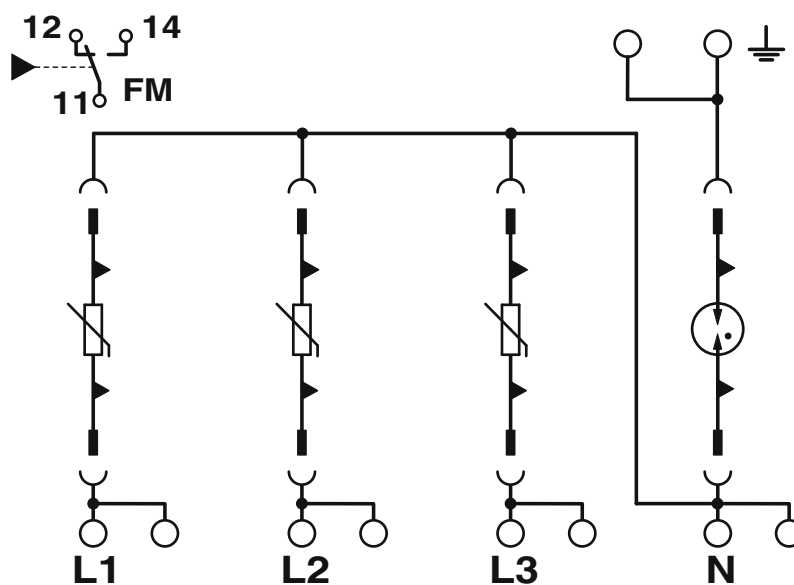

Dimensional drawing

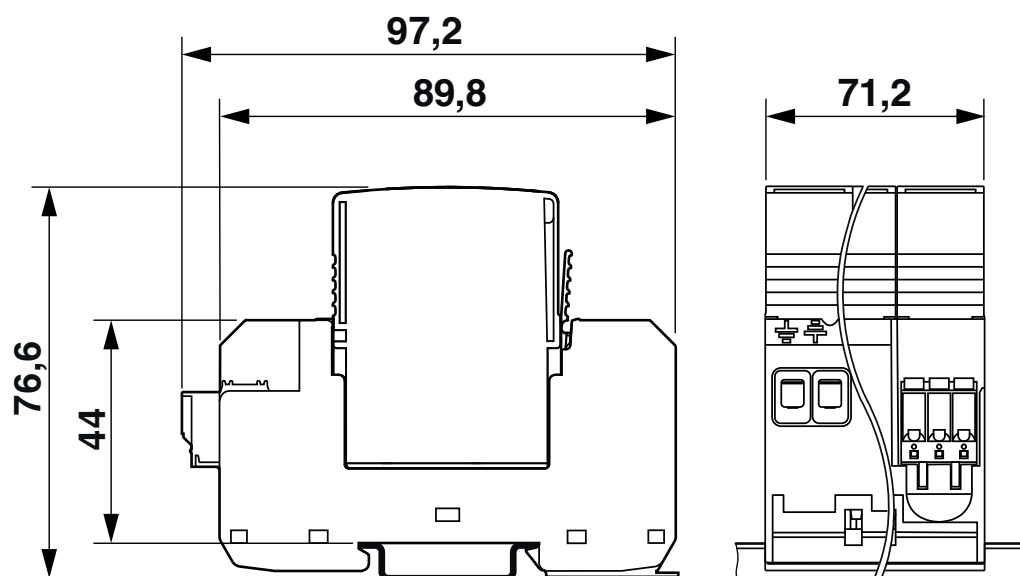


VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417

<https://www.phoenixcontact.com/in/products/1266417>

Diagram

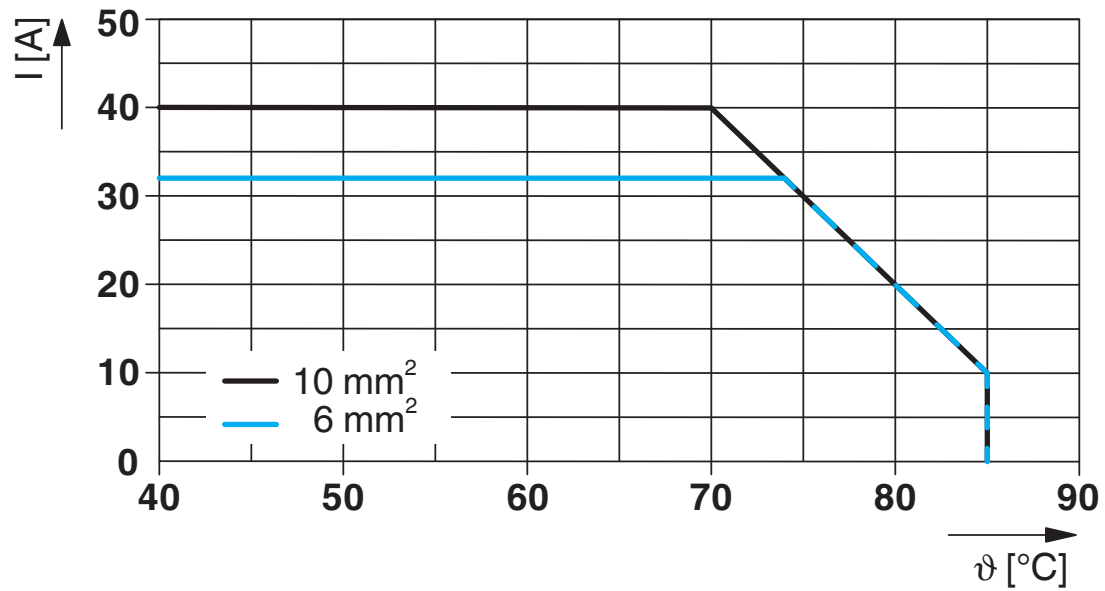

VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417
<https://www.phoenixcontact.com/in/products/1266417>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1266417>

**IECEE CB Scheme**
Approval ID: NL-71987

CCA
Approval ID: NTR-NL 7875

**KEMA-KEUR**
Approval ID: 71-118125

UAE-RoHS
Approval ID: 23-10-88705

VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417
<https://www.phoenixcontact.com/in/products/1266417>

Classifications

ECLASS

ECLASS-11.0	27130802
ECLASS-13.0	27171201

ETIM

ETIM 9.0	EC000381
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417
<https://www.phoenixcontact.com/in/products/1266417>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417

<https://www.phoenixcontact.com/in/products/1266417>

Accessories

VAL-MS-T1/T2 335 P - Type 1/2 surge protection plug

1268815

<https://www.phoenixcontact.com/in/products/1268815>



T1/T2 lightning current/surge protection plug with high-capacity varistor for VAL-MS-T1/T2 PT base element, thermally monitored, visual fault indication. Version: 230 V AC

F-MS-T1/T2 50 P - Type 1/2 surge protection plug

1268817

<https://www.phoenixcontact.com/in/products/1268817>



T1/T2 lightning/surge protection plug, with N-PE total current spark gap for VAL-MS-T1/T2 PT base element.

VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417

<https://www.phoenixcontact.com/in/products/1266417>

EML (20X8)R - Label

0816786

<https://www.phoenixcontact.com/in/products/0816786>



Label, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: adhesive, Number of individual labels: 2500, text field height: 8 mm, text field width: 20 mm

B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/in/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

VAL-MS-T1/T2 335/12.5/3+1-FM-PT - Lightning/surge arrester type 1/2



1266417

<https://www.phoenixcontact.com/in/products/1266417>

VAL-MS-T1/T2 335 P - Type 1/2 surge protection plug

1268815

<https://www.phoenixcontact.com/in/products/1268815>



T1/T2 lightning current/surge protection plug with high-capacity varistor for VAL-MS-T1/T2 PT base element, thermally monitored, visual fault indication. Version: 230 V AC

F-MS-T1/T2 50 P - Type 1/2 surge protection plug

1268817

<https://www.phoenixcontact.com/in/products/1268817>



T1/T2 lightning/surge protection plug, with N-PE total current spark gap for VAL-MS-T1/T2 PT base element.

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in