


OBF504



Fibre-optic amplifier

OBF-FAKG/T/US

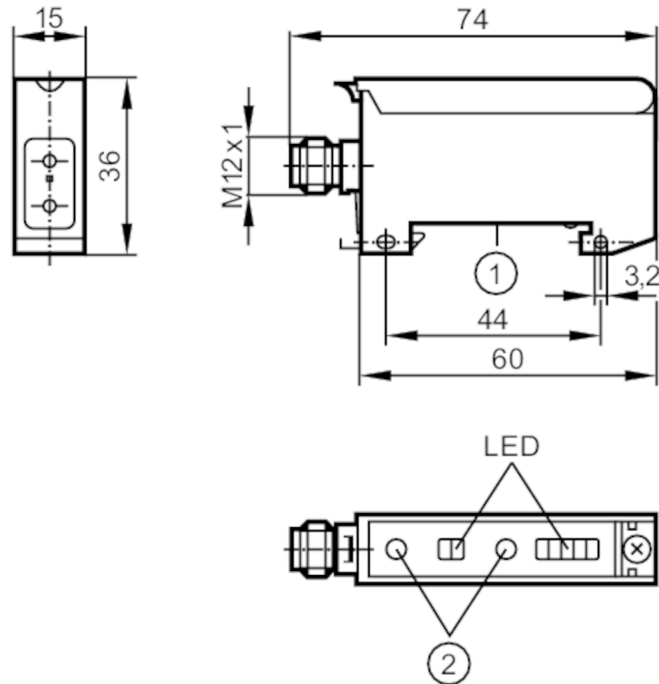

- 1 mounting on DIN rail
- 2 setting pushbuttons



Product characteristics		
Type of light		red light
Housing		rectangular
Application		
Special feature		Function check output
Design		Fibre-optic amplifiers for glass fibre optics, for fibre optics with metal sheath, FE/FT-50
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 50
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Outputs		
Electrical design		PNP/NPN; (automatic load detection PNP/NPN)
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Function check output		yes
Max. voltage drop of function check output	[V]	2.5
Max. current load for function check output	[mA]	10

OBF504



Fibre-optic amplifier

OBF-FAKG/T/US

Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Time function	[s]	0.001...0.09
Detection zone		
Range	[m]	0...1; (Through-beam sensor)
Range	[mm]	0...150; (Diffuse reflection sensor)
Range adjustable		yes
Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 65
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	806
Mechanical data		
Weight	[g]	46.9
Housing		rectangular
Type of mounting		mounting on DIN rail; (TH35 (EN 60715))
Dimensions	[mm]	36 x 15 x 60
Materials		PPE modified
Lens alignment		side lens
Displays / operating elements		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	unsafe zone	1 x LED, red
	excess gain	4 x LED, green
Remarks		
Remarks	light-on mode corresponds to the NC output function for through-beam fibre optics	
	corresponds to the NO output function for diffuse-reflection fibre optics	
	dark-on mode corresponds to the NO output function for through-beam fibre optics	
	corresponds to the NC output function for diffuse-reflection fibre optics	
	operating voltage "supply class 2" according to cULus	
Pack quantity		1 pcs.

Fibre-optic amplifier



OBF-FAKG/T/US

Electrical connection

Connector: 1 x M12; coding: A



Connection

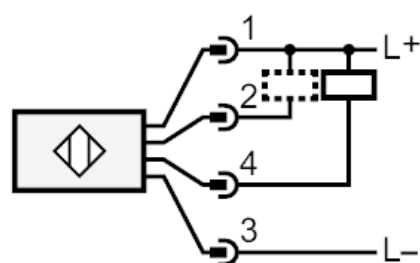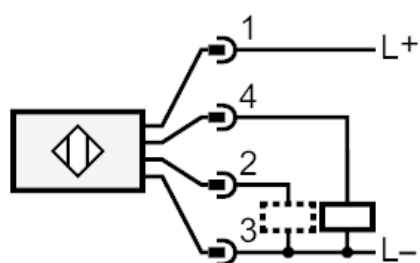

2

Function check output