### 3-Screen Display

## **High-Precision Digital Pressure Switch**

- Made to order options have been added.
- A One-touch fitting type has been added to the piping specifications.

#### It is possible to change the settings

Measured value (Current pressure value)


#### while checking the measured value.


settings

Sub screen

Label (Display item), Set value (Threshold value)







Hysteresis value

**RoHS** 

<u>əl</u> c	Series							Piping					
Applicable fluid			Output type	Enclosure	Copy function	M5 female thread	1/8 (R, NPT)	One-touch fittings (ø4 mm, ø6 mm, ø1/4 inch)	1/4 (R, NPT, G) (URJ* <sup>1</sup> /TSJ <sup>*2</sup> )				
		0002- 2.1.8500	1 output	IP40	_	•	•	•	_				
Air	ZSE20A(F)/ ISE20A p.11	0002- 1 5500	2 outputs Analog output (Voltage/Current)	IP40	•	•	•	•	_				
	ZSE20B(F)-(L)/ ISE20B-(L) pp. 13, 15		2 outputs Analog output (Voltage/Current)	IP65	•			<b>•</b> *5	_				
			IO-Link/ Switch: 1 output		*4			_					
General		002-	2 outputs Analog output (Voltage/Current)	IP65	•	<b>•</b> *3	(Rc thread only)	_	•				

- \*1 Face seal fitting \*2 Compression fitting \*3 With 1/4 (R, NPT, G) M5 female threaded
- \*4 A block parameter or data storage function is provided with the IO-Link compatible type.
- \*5 Only the ø4 mm or ø6 mm elbow type One-touch fitting is applicable.







### Improved Operability

### Visualization of Settings


The sub screen (label) shows the item to be set.

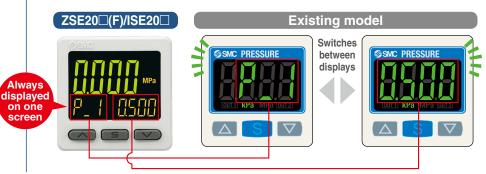

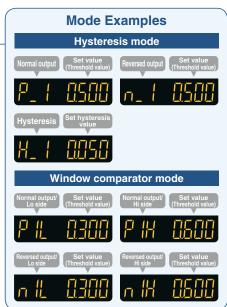

# Simple 3-Step Setting

When the S button is pressed and the set value (P\_1) is being displayed, the set value (threshold value) can be set. When the S button is pressed and the hysteresis (H\_1) is being displayed, the hysteresis value can be set.

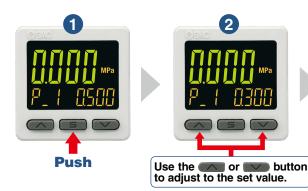






#### **Easy Screen Switching**


It is possible to change the settings while checking the measured value.

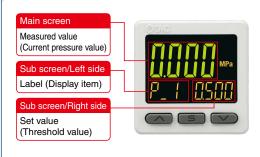



- st One additional arbitrary display mode can be added via the function settings. (Refer to page 3.)
- \* Example for 1 output



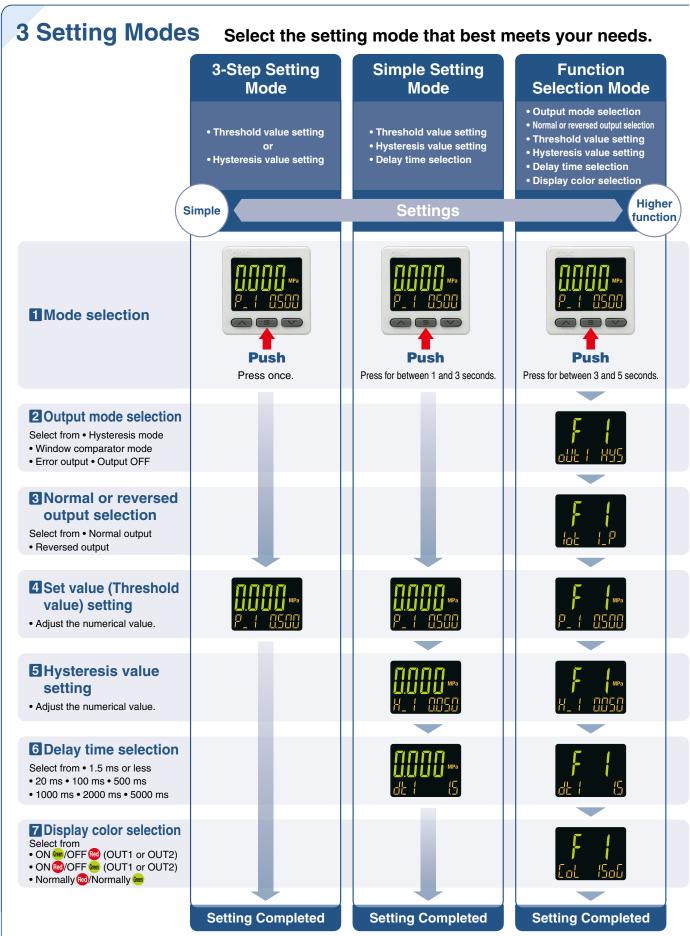


### Improved Operability

### **Other Sub Screen Display**

The peak value or bottom value, or both values can be displayed on one screen!

\* Peak and bottom values are maintained even if the power supply is cut.



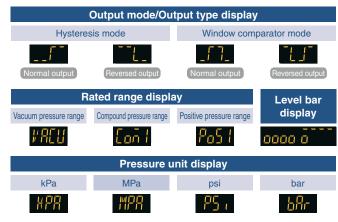

A combination of the displays shown above and the set values can be displayed on the 2 sub screens.

### Delay Time 1.5 ms or less

\*1 Select from 1.5 ms or less, 20 ms, 100 ms, 500 ms, 1000 ms, 2000 ms, or 5000 ms.


### **Convenient Functions**

pp. **17, 26** 

Functions	Copy function	Auto-shift function	Security code	Power saving mode	Resolution switch function	MPa/kPa switch function
20	_	_	•	•	•	•
20A	•	•	•	•	•	•
20B	•	•	•	•	•	•
20B-L	_	_	•	•	•	•
20C	•	•	•	•	•	•

#### Copy function

The set values of the sensor can be copied.

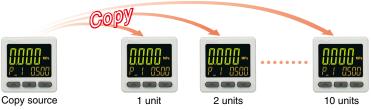

Copy destination  $\rightarrow$ 

#### Auto-shift function

This measures the pressure at the time of external input and uses it as a reference to correct the on-off point of the switch.

#### Security code

The key-lock function keeps unauthorized persons from tampering with the settings.

#### Power saving mode

Power consumption is reduced by turning off the monitor.

Series	Current consumption	Reduction rate*1		
20	25 mA or less	Approx. 60% reduction		
20A		100/		
20B(-L)	35 mA or less	Approx. 40% reduction		
20C				

\*1 In power saving mode

#### Display resolution switch function

Reduces monitor flickering



(Only the displayed values are changed; the accuracy remains the same.)

#### MPa/kPa switch function

Vacuum, compound, and/or positive pressure can be displayed in MPa or kPa.












### Compact & Lightweight

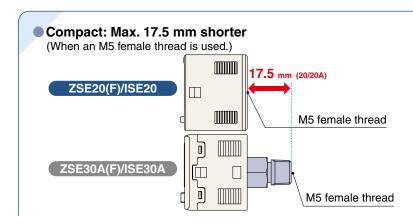


Lightweight: Max. 21 g lighter (When an M5 female thread is used.)

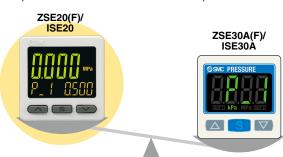

### Improved Installability

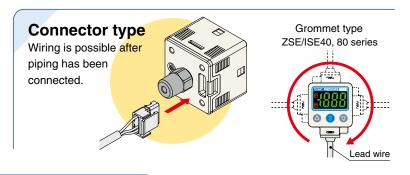


### **Enclosure**

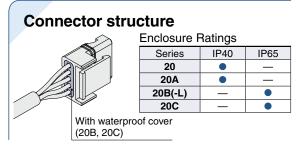

### Mounting


Available Mounting Options

	<u> </u>			
Series	Bracket A	Bracket B	Bracket C	Panel mount
20	•	•	_	•
20A	•	•	_	•
20B(-L)	•	•	_	•
20C	•	_	•	•

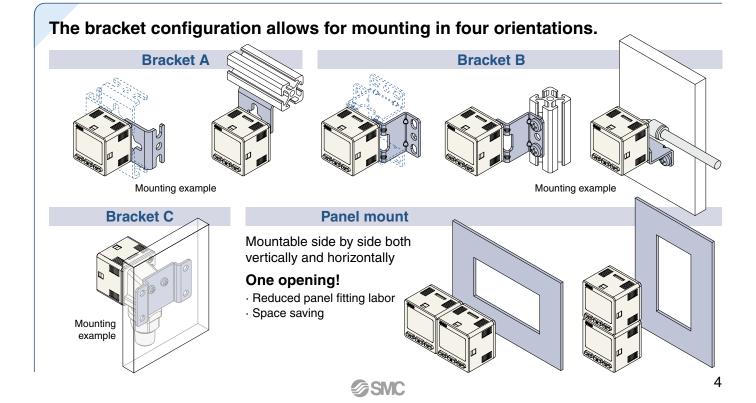

### IO-Link Compatible ZSE20B(F)-L/ISE20B-L 5.15

#### Visualization of operation/equipment status/Remote monitoring and control by communication

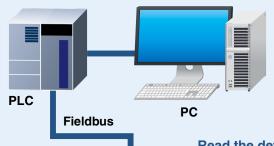

#### Configuration File (IODD File\*1)

•Manufacturer •Product part no. •Set value

#### \*1 IODD File:

IODD is an abbreviation of IO Device Description. This file is necessary for setting the device and connecting it to a master. Save the IODD file on the PC to be used to set the device prior to use.



IO-Link is an open communication interface technology between the sensor/actuator and the I/O terminal that is an international standard: IEC 61131-9.



IO-Link Compatible Device ZSE20B(F)-L/ISE20B-I

Diagnosis items

#### Read the device data.

- •Switch ON/OFF signal and analog value
- Device information:
- Manufacturer, Product part number, Serial number, etc.
- Normal or abnormal device status
- Cable breakage



**IO-Link Master** 

0.-.0

0.-0

#### Implement diagnostic bits in the process data.

The diagnostic bit in the cyclic process data makes it easy to find problems with the equipment.

**Device settings** 

master.

etc.

•Threshold value

·Operation mode,

can be set by the

It is possible to find problems with the equipment in real time using the cyclic (periodic) data and to monitor such problems in detail with the noncyclic (aperiodic) data.

#### **Process Data**

Bit offset	Item	Note			
0	OUT1 output	0: OFF	1: ON		
1	OUT2 output	0: OFF	1: ON		
2	Diagnosis	0: Normal	1: Abnormal		
3 to 15	Measured pressure value	Unsigned 1	3 bit		

	Upper temperature limit
-	exceeded inside the product

· Internal product malfunction

· Outside of zero-clear range

· Outside of rated pressure range

Bit offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Item	Measured pressure value									Diagnosis	OUT2	OUT1				

#### **Display function**

Displays the output communication status and indicates the presence of communication data









#### **Operation and Display**

Communication with master		status or light	Status		Screen display*3	Description	
		<b>⊘</b> *2		_	Operate	ModE oPE	Normal communication status (readout of measured value)
				Normal	Start up	ModE Strt	At the start of communication
	0.000			_	Preoperate	ModE PrE	At the start of communication
Yes	COM*1	*2	IO-Link mode		Version does not match	Er 15	The IO-Link version does not match that of the master.  The master uses version 1.0.  * The applicable IO-Link version is 1.1.
		(Flashing)		ormal	Lock	ModE LoC	Backup and restore required due to data storage lock
No	OFF			Abn	Communication disconnection	ModE oPE ModE Strt ModE PrE	Normal communication was not received for 1 s or longer.
		OFF	SIO mode		MadE 5 ia	General switch output	

<sup>\*1</sup> The COM indicator is ON when communication with the master is established. \*2 In IO-Link mode, the IO-Link indicator will be ON or flashing. \*3 When the sub screen is set to Mode

#### For General Fluids ZSE20C(F)/ISE20C(H) p.24

### Stainless diaphragm

Oil-free (Single-layer diaphragm structure)

Sensor unit: Stainless steel 630 Fitting parts: Stainless steel 304

A stainless steel 316L option is also available for the sensor unit and fitting parts.

**Enclosure: IP65** 

### Leakage

1 x 10<sup>-10</sup> Pa·m<sup>3</sup>/s

1 x 10<sup>-5</sup> Pa·m<sup>3</sup>/s

<Face seal and compression fitting> <Threaded type (R, Rc, NPT, G)>

### Grease-free

 The grease-free specification does not intentionally apply grease to the parts in contact with fluid.



### Select from 2 piping directions.





#### Welded structure for sensor units and fitting parts


Select from a face seal or compression fitting.

Face seal Con






Confirmation of the atmospheric pressure of a load lock chamber



### Applicable Fluid Examples

- Water
- Hydraulic fluid (JIS-K2213)
- Silicone oil
- Lubricant
- Fluorocarbon
- Argon
- Carbon dioxide
- Air-containing drainage
- Nitrogen

#### **Applications**







#### **Made to Order**

 Parts in contact with fluid: Stainless steel 316L (-X500)


This pressure switch has increased corrosion resistance due to the use of stainless steel 316L for the parts in contact with fluid (pressure sensor and fitting).

p. 38

■ Restrictor-installed fitting (-X510)


A pressure switch that has a restrictor installed in the fitting is available to prevent the sensor from being damaged by water hammer or fluid inertia.

p. 38

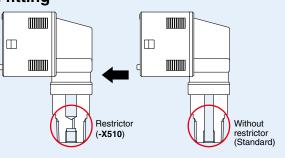



#### Introduction of Series

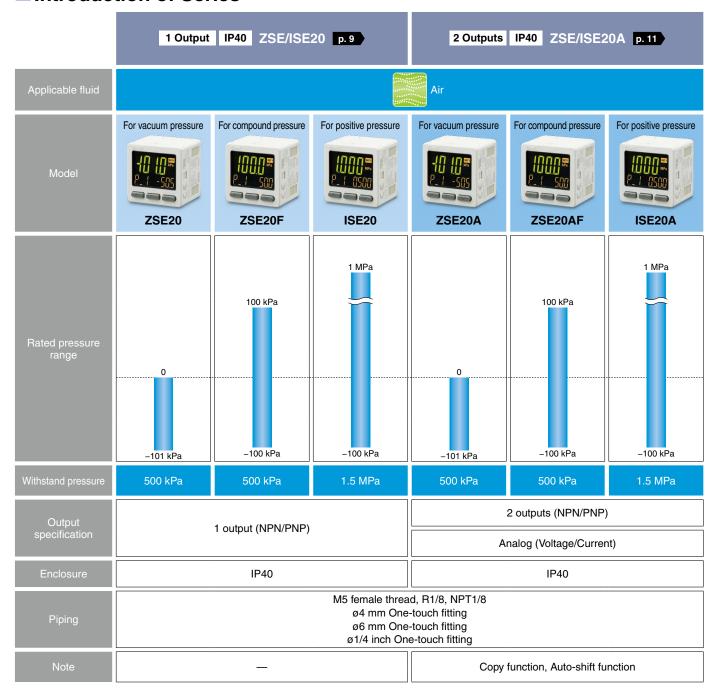


#### CONTENTS

### 3-Screen Display High-Precision Digital Pressure Switch ZSE20(F)/ISE20 Series

How to Order ·····p.	9
Specificationsp. 1	0
Set Pressure Range and Rated Pressure Range p. 1	7
Analog Output ·····p. 1	7
IO-Link: Process Data ·····p. 1	7
Functions ·····p. 1	7
Internal Circuits and Wiring Examplesp. 1	
Dimensions ····· pp. 20 to 2	3

### 3-Screen Display High-Precision Digital Pressure Switch ZSE20A(F)/ISE20A Series

How to Order ·····p. 11
Specificationsp. 12
Set Pressure Range and Rated Pressure Range p. 17
Analog Output ·····p. 17
IO-Link: Process Data ·····p. 17
Functions p. 17
Internal Circuits and Wiring Examplespp. 18, 19
Dimensions

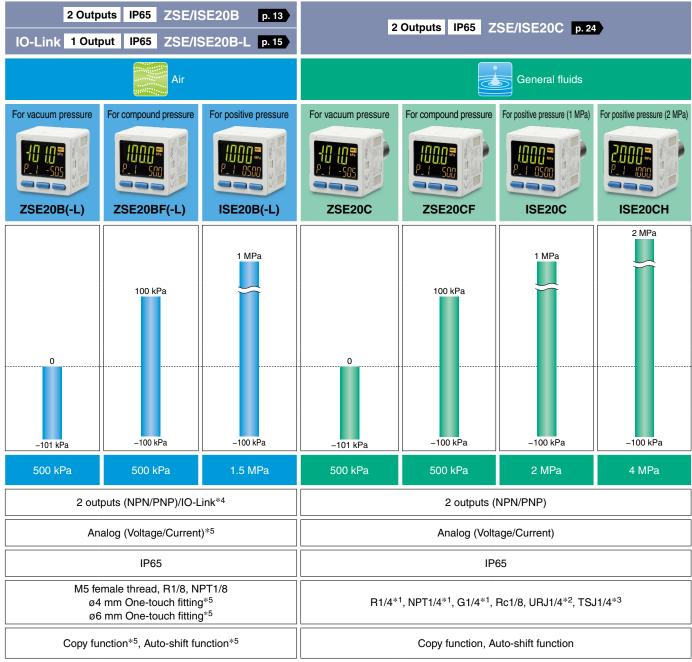

<sup>\*4 1</sup> output in SIO mode (NPN or PNP switching type)

\*1 M5 female threaded \*2 Face seal fitting \*3 Compression fitting

### 3-Screen Display High-Precision Digital Pressure Switch ZSE20B(F)/ISE20B Series

How to Order ·····	· p.	13
Specifications	· p.	14

### 3-Screen Display High-Precision Digital Pressure Switch/ IO-Link Compatible

#### ZSE20B(F)-L/ISE20B-L Series

How to Order ····· p. 1
Specificationsp. 1
Set Pressure Range and Rated Pressure Range p. 1
Analog Output ····· p. 1
IO-Link: Process Data p. 1
Functionsp. 1
Internal Circuits and Wiring Examplespp. 18, 1
Dimensions ·····pp. 20 to 2

### 3-Screen Display High-Precision Digital Pressure Switch for General Fluids

#### ZSE20C(F)/ISE20C(H) Series

How to Order ·····	····· p. 24
Specifications ·····	····· p. 25
Set Pressure Range and Rated Pressure Range	p. 26
Analog Output ······	······ p. 26
Functions	······ p. 26
Internal Circuits and Wiring Examples	······ p. 27
Dimensions	p. 28 to 33
Function Detailsp	p. 34 to 37
Made to Order ······	p. 38 to 42
Safety Instructions ······	Back cover



<sup>\*5</sup> This function is not provided with the IO-Link compatible type.


1 Output

# 3-Screen Display High-Precision

**Digital Pressure Switch** 

# ZSE20(F)/ISE20 Series



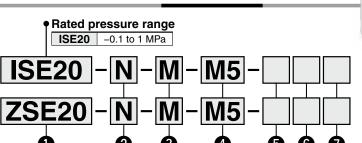





#### Rated pressure range

For Positive Pressure

For Vacuum/ Compound Pressure

ZSE20	0 to -101 kPa
ZSE20F	-100 to 100 kPa

#### 2 Output specification

Symbol	Description			
N	NPN open collector 1 output			
Р	PNP open collector 1 output			

#### 3 Unit specification

	•
Symbol	Description
Nil	Units selection function*1
M	SI units only*2
Р	Units selection function (Initial value psi)*1

- \*1 Under the New Measurement Act, switches with the units selection function are no longer allowed for use in Japan.
- \*2 Fixed units: kPa, MPa

4 Piping specification

adapter

ZS-46-N2

	<u> </u>				
Symbol	Description	Symbol	Symbol Description		
	M5 female thread	C4H	One-touch fitting ø4 mm	Straight type	
M5		С6Н	One-touch fitting ø6 mm		
	Piping port	N7H	One-touch fitting ø1/4 inch		
	R1/8 R1/8 Piping	C4L	One-touch fitting ø4 mm	Elbow type	
01	adapter ZS-46-N1	C6L	One-touch fitting ø6 mm		
	23-40-111	N7L	One-touch fitting ø1/4 inch		
	NPT1/8 NPT1/8 Piping	* One-touch fitting is shipped together with the			
	i NPT 1/6 Piping	g product.			

Option 1

Symbol		Description
Nil	Without lead	l wire
L	Lead wire with connector (3-core, 2 m lead wire)	ZS-46-3L Without waterproof cover

\* For the lead wire with M12 connector, refer to page 39.

#### Option 3

Symbol	Operation manual*1	Calibration certificate*1
Nil	0	_
Υ	_	_
K	0	0
Т	_	0

\*1 All texts are in both English and Japanese.

#### 6 Option 2

N01

<u> </u>	D ' ' '						
Symbol	Description						
Nil	None						
<b>A</b> 1	Bracket A (Vertical mounting)		ZS-46-A1				
A2	Bracket B (Horizontal mounting)		ZS-46-A2				
В	Panel mount adapter		ZS-46-B				
D	Panel mount adapter + Front protection cover		ZS-46-D				

#### Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.

Description	Part no.	Note
Bracket A	ZS-46-A1	Tapping screw: Nominal size 3 x 8 L (2 pcs.)
Bracket B	ZS-46-A2	Tapping screw: Nominal size 3 x 8 L (2 pcs.)
Panel mount adapter	ZS-46-B	_
Panel mount adapter + Front protection cover	ZS-46-D	_
Lead wire with connector	ZS-46-3L	3-core, 2 m, Non-waterproof (Without waterproof cover)
Lead wire with M12 connector	ZS-46-5LM12	Made to order (Refer to page 39.)
Front protection cover	ZS-27-01	_
R1/8 Piping adapter	ZS-46-N1	R1/8 NPT1/8
NPT1/8 Piping adapter	ZS-46-N2	
One-touch fitting ø4 mm straight	ZS-46-C4H	_
One-touch fitting ø6 mm straight	ZS-46-C6H	_
One-touch fitting ø1/4 inch straight	ZS-46-N7H	_
One-touch fitting ø4 mm elbow	ZS-46-C4L	_
One-touch fitting ø6 mm elbow	ZS-46-C6L	_
One-touch fitting ø1/4 inch elbow	ZS-46-N7L	_
Spacer for fitting extension	P3311276A	Made to order (Refer to page 40.)

### 3-Screen Display High-Precision Digital Pressure Switch ZSE20(F)/ISE20 Series

For pressure switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

#### **Specifications**

Model		ZSE20 (Vacuum pressure)   ZSE20F (Compound pressure)   ISE20 (Positive press				
Applicable fluid		Air, Non-corrosive gas, Non-flammable gas				
	Rated pressure range	0.0 to -101.0 kPa	-100.0 to 100.0 kPa	-0.100 to 1.000 MPa		
Pressure	Display/Set pressure range	10.0 to -105.0 kPa	-105.0 to 105.0 kPa	-0.105 to 1.050 MPa		
riessuie	Display/Smallest settable increment	0.1	kPa	0.001 MPa		
	Withstand pressure	500	1.5 MPa			
	Power supply voltage	12 to	24 VDC ±10%, Ripple (p-p) 10%	or less		
Power supply	Current consumption		25 mA or less			
	Protection		Polarity protection			
	Display accuracy	±2% F.S.	$\pm 1$ digit (Ambient temperature of	25 ±3°C)		
Accuracy	Repeatability		±0.2% F.S. ±1 digit			
	Temperature characteristics		±2% F.S. (25°C standard)			
	Output type	l l	IPN or PNP open collector 1 outp	ut		
	Output mode	Hysteresis mode,	Window comparator mode, Error	output, Output OFF		
	Switch operation		Normal output, Reversed output			
	Max. load current		80 mA			
Switch output	Max. applied voltage (NPN only)	28 V				
Switch output	Internal voltage drop (Residual voltage)	1 V or less (at load current of 80 mA)				
	Delay time*1	1.5 ms or less (with anti-chattering function: 20, 100, 500, 1000, 2000, 5000 m				
	Hysteresis mode	Variable from 0*2				
	Window comparator mode					
	Short circuit protection		Yes			
	Unit*3	MPa, kPa, kgf/cm²,	bar, psi, inHg, mmHg	MPa, kPa, kgf/cm², bar, psi		
	Display type	LCD				
	Number of screens	3-screen display (Main screen, Sub screen x 2)				
Display	Display color	1) Main screen: Red/Green 2) Sub screen: Orange				
	Number of display digits	Main screen: 4 digits (7 segments)     Sub screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)				
	Indicator light	Lights up when switch output is turned ON. OUT1: Orange				
Digital filter*4		0, 10, 50, 100, 500, 1000, 5000 ms				
	Enclosure	IP40				
	Withstand voltage	1000 VAC	1000 VAC for 1 minute between terminals and housing			
Environmental	Insulation resistance	50 MΩ or more (500 VDC r	neasured via megohmmeter) betv	ween terminals and housing		
resistance	Operating temperature range	Operating: -5 to 50	°C, Stored: -10 to 60°C (No cond	ensation or freezing)		
	Operating humidity range	Operatin	g/Stored: 35 to 85% RH (No cond	lensation)		
Standards		UL/CSA (E216656), CE marking (EMC directive/RoHS directive)				
Length of lead	wire with connector	2 m				
4 1/ 1 11 1	digital filter (at 0 mg)	*		· · · · · · · · · · · · · · · · · · ·		

- \*1 Value without digital filter (at 0 ms)
- \*2 If the applied pressure fluctuates around the set value, the hysteresis must be set to a value greater than the amount of fluctuation, or chattering will occur.
- \*3 Setting is only possible for models with the units selection function. Only MPa or kPa is available for models without this function.
- \*4 The response time indicates when the set value is 90% in relation to the step input.
- \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

#### **Piping Specifications and Weights**

- thurst of the contract of th										
	Model	M5 01 N01 C4H C6H N7H C4L C6L					N7L			
Port size		M5 x 0.8	R1/8	NPT1/8	_	_	_	_	_	_
	One-touch fitting Straight type	_	_	_	ø4 mm ø5/32 inch	ø6 mm	ø1/4 inch	_	_	_
	One-touch fitting Elbow type	_	_	_	_	_	_	ø4 mm ø5/32 inch	ø6 mm	ø1/4 inch
	Sensor pressure receiving area		Silicon							
Materials of	Piping port (Common)		PBT, CB156, Heat-resistant PPS, O-ring: HNBR							
parts in contact with fluid	Piping port	_	plating), Sta	C3604 (Electroless nickel plating), Stainless steel POM, Stainless steel 304, NBR, C3604 304, NBR						
Waight	Body	22 g	32 g	34 g	25 g	26 g	27 g	28 g	28 g	34 g
Weight	Lead wire with connector			+35 g						

#### Cable Specifications

Conductor cross section		0.15 mm² (AWG26)
Insulator O.D. Color		1.0 mm
insulator	Color	Brown, Blue, Black (3-core)
Sheath	Finished O.D.	ø3.4

"Set Pressure Range and Rated Pressure Range," "Functions" → p. 17 "Internal Circuits and Wiring Examples" 

p. 18 "Dimensions" 

From p. 20



2 Outputs + Analog Output (Voltage/Current)

# **3-Screen Display High-Precision Digital Pressure Switch**

ZSE20A(F)/ISE20A Series

#### **How to Order**





(RoHS

For Positive Pressure

ISE20A - X - M - M5 - THE ISE20A - X - M - M



For Vacuum/ Compound Pressure

2 Output specification

Rated pressure range ISE20A -0.1 to 1 MPa

Symbol	Description			
R	NPN open collector 2 outputs + Analog voltage output *1			
S	NPN open collector 2 outputs + Analog current output *1			
Т	NP open collector 2 outputs + Analog voltage output *1			
V	PNP open collector 2 outputs + Analog current output *1			
X	NPN open collector 2 outputs + Copy function			
Y	PNP open collector 2 outputs + Copy function			

\*1 Can be switched to auto-shift or copy function

3 Unit specification

Symbol	Description
Nil	Units selection function*1
М	SI units only*2
Р	Units selection function (Initial value psi)*1


- \*1 Under the New Measurement Act, switches with the units selection function are no longer allowed for use in Japan.
- \*2 Fixed units: kPa, MPa

4 Piping specification

ZS-46-N2

Tiping specification						
Symbol	Description	Symbol	mbol Description			
	M5 female thread	C4H	One-touch fitting ø4 mm	Straight type		
M5		С6Н	One-touch fitting ø6 mm			
	Piping port	N7H	One-touch fitting ø1/4 inch			
	R1/8 R1/8 Piping	C4L	One-touch fitting ø4 mm	Elbow type		
01	adapter ZS-46-N1	C6L	One-touch fitting ø6 mm			
	23-40-111	N7L	One-touch fitting ø1/4 inch			
			ne-touch fitting is shipped to oduct.	ogether with the		
NO1	adapter					

**5** Option 1



 For the lead wire with M12 connector, refer to page 39.

**7** Option 3

Symbol	Operation manual*1	Calibration certificate*1
Nil	0	_
Υ	_	_
K	0	0
Т	_	0

 All texts are in both English and Japanese.

6 Option 2

<u> </u>	11011 2	
Symbol	]	Description
Nil	None	
A1	Bracket A (Vertical mounting)	ZS-46-A1
A2	Bracket B (Horizontal mounting)	ZS-46-A2
В	Panel mount adapter	ZS-46-B
D	Panel mount adapter + Front protection cover	ZS-46-D

#### **Options/Part Nos.**

When only optional parts are required, order with the part numbers listed below.					
Description	Part no.	Note			
Bracket A	ZS-46-A1	Tapping screw: Nominal size 3 x 8 L (2 pcs.)			
Bracket B	ZS-46-A2	Tapping screw: Nominal size 3 x 8 L (2 pcs.)			
Panel mount adapter	ZS-46-B	_			
Panel mount adapter + Front protection cover	ZS-46-D	_			
Lead wire with connector	ZS-46-5L	5-core, 2 m, Non-waterproof (Without waterproof cover)			
Lead wire with M12 connector	ZS-46-5LM12				
	70.07.04	Made to order (Refer to page 39.)			
Front protection cover	ZS-27-01	_			
R1/8 Piping adapter	ZS-46-N1	R1/8 NPT1/8			
NPT1/8 Piping adapter	ZS-46-N2				
One-touch fitting ø4 mm straight	ZS-46-C4H	_			
One-touch fitting ø6 mm straight	ZS-46-C6H	_			
One-touch fitting ø1/4 inch straight	ZS-46-N7H	_			
One-touch fitting ø4 mm elbow	ZS-46-C4L	_			
One-touch fitting ø6 mm elbow	ZS-46-C6L	_			
One-touch fitting ø1/4 inch elbow	ZS-46-N7L	_			
Spacer for fitting extension	P3311276A	Made to order (Refer to page 40.)			

### 3-Screen Display High-Precision Digital Pressure Switch ZSE20A(F)/ISE20A Series

For pressure switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

#### **Specifications**

Protection   Polarity protection   Display accuracy   £2% F.S. ±1 digit (Ambit temperature of 25 ±3°C)   Repeatability   £2.5% F.S. (Ambient temperature of 25 ±3°C)   Analog output accuracy   £2.5% F.S. (Ambient temperature of 25 ±3°C)   Analog output florearity   £1% F.S.   Temperature characteristics   £2% F.S. (25°C standard)   £2.5% F.S. (Ambient temperature of 25 ±3°C)   Analog output florearity   £1% F.S.   £25°C standard)   £2.5% F.S. (Ambient temperature of 25 ±3°C)   Analog output florearity   £1% F.S.   £25°C standard)   £2.5% F.S. (25°C standard)		Mo	odel	ZSE20A (Vacuum pressure)	ZSE20AF (Compound pressure)	ISE20A (Positive pressure)		
Display/Set pressure range   10.0 to -105.0 kPa   -105.0 to 105.0 kPa   0.001 MPa   0.0				Air, N	Ion-corrosive gas, Non-flammable	e gas		
Display/Shallest settable increment   Display/Shallest settable increment   Withstand pressure   So0 kPa   0.01 kPa   0.001								
Display/Smallest settable increment   0.1 kPa   0.001 MPa   1.5			<u> </u>	10.0 to -105.0 kPa				
Withstand pressure   S00 kPa	Pressure	Display/Smallest settable increment						
Power supply   Current consumption   Power supply voltage   12 to 24 VDC ±10%, Ripple (p-p) 10% or less   25 current consumption   Robartly protection   Robartly   ±0.2%, F.S. ±1 digit   ±0.2%, F.S. ±1 digit   ±0.2%, F.S. ±1 digit   ±0.2%, F.S. ±1 digit   ±0.2%, F.S. (Ambient temperature of 25 ±3°C)   ±1%, F.S. (Ambient temperature of 26 ±3°C)   ±1%, F.S. (Ambient temperature of 25 ±3°C)   ±1%, F.S. (Ambient temperature of 25 ±3°C)   ±1%, F.S. (Ambient temperature of 25 ±3°C)   ±1%, F.S. (Ambient temperature of 26 ±3°C)   ±1%, F.S. (Ambient temperature of 25 ±3°C)   ±1%, F.S. (Ambient temperature of 25 ±3°C)   ±1%, F.S. (								
Current consumption   3s m A or less   Protection   Potatety protection   Potaty prot				12 to 2	24 VDC ±10%, Ripple (p-p) 10%			
Display accuracy   ±2% F.S. ±1 digit (Ambient temperature of 25 ±3°C)   Repeatability   ±0.2% F.S. ±1 digit   Analog output accuracy   ±2.5% F.S. (Ambient temperature of 25 ±3°C)   Analog output linearity   ±1.2% F.S. (Ambient temperature of 25 ±3°C)   4.1% F.S.	Power supply							
Display accuracy   £2% F.S. ±1 digit (Ambient temperature of 25 ±3°C)	•••	Protection	1	Polarity protection				
Repeatability   3-0.2% F.S. ±1 digit   1-1.5% F.S. ±1 digit   1-1.5% F.S. ±1 digit   1-1.5% F.S. (Ambient temperature of 25 ±3°C)   2-1.5% F.S. (Ambient temperature of 25 ±3°C)   2-1.5% F.S. (Ambient temperature of 25 ±3°C)   2-1.5% F.S. (25°C standard)   2-1.5% F.S. (25°C		Display ad	ccuracy	±2% F.S.	±1 digit (Ambient temperature of	25 ±3°C)		
Analog output linearity #1% F.S. Temperature characteristics #2% F.S. (25°C standard) Output type		Repeatab	ility					
Temperature characteristics	Accuracy			±2.5%		±3°C)		
Output mode   Hysteresis mode, Window comparator mode, Error output, Output OFF	-	Analog ou	Itput linearity					
Switch output   Switch operation   Max. load current   Max. lo		Temperate	ure characteristics		±2% F.S. (25°C standard)			
Switch output   Switch operation   Max. load current   Max. lo				NI	PN or PNP open collector 2 outpu	uts		
Max. load current   80 mA   Max. applied voltage (NPN only)   28 V   Internal voltage drop (Residual voltage)   1.5 ms or less (with anti-chattering function: 20, 100, 500, 1000, 2000, 5000 ms)		Output me	ode	Hysteresis mode, \	Vindow comparator mode, Error	output, Output OFF		
Max. load current   80 mA   Max. applied voltage (NPN only)   28 V   Internal voltage drop (Residual voltage)   1.5 ms or less (with anti-chattering function: 20, 100, 500, 1000, 2000, 5000 ms)		Switch op	eration					
Internal voltage drop (Residual voltage)   1.5 ms or less (with anti-chattering function: 20, 100, 500, 1000, 2000, 5000 ms)								
Internal voitage drop (residual voitage)   1.5 ms or less (with anti-chattering function: 20, 100, 500, 1000, 2000, 5000 ms)	Curitab autrost				28 V			
Delay time *1	Switch output			1	V or less (at load current of 80 m	A)		
Hysteresis mode   Window comparator mode   Short circut protection   Yes		Delay time	e*1	1.5 ms or less (with ant	-chattering function: 20, 100, 500	0, 1000, 2000, 5000 ms)		
Number of display digits   Display type   Display type   Number of display digits   Display type   Display t		Uluatawaala	Hysteresis mode	,				
Voltage output   Output type   Output type   Output: 1 to 5 V   Output: 0.6 to 5 V		Window comparator mode		variable from 0°2				
Analog output         Output impedance Output type         Current output: 4 to 20 mA         Current output: 2.4 to 20 mA         Maximum load impedance at power supply voltage of 12 V: 300 Ω Minimum load impedance: 50 Ω           Auto-shift input         Input type         Non-voltage input: 0.4 V or less         Minimum load impedance: 50 Ω           Auto-shift input         Input type         Select from Auto-shift or Auto-shift or Auto-shift zero.           Input tyme         5 ms or more         5 ms or more           Unit*3         MPa, kPa, kgf/cm², bar, psi, inHg, mmHg         MPa, kPa, kgf/cm², bar, psi           Display type         LCD         LCD           Number of screens         3-screen display (Main screen, Sub screen x 2)           Display color         1) Main screen: Red/Green           2) Sub screen: Orange         2) Sub screen: Orange           Number of display digits         1) Main screen: 4 digits (7 segments)           1 Minimum load impedance         1 year of screen           2) Sub screen: 4 digits (1) segments, 7 segments for other)           Indicator light         Lights up when switch output is turned ON. OUT1, OUT2: Orange           Enclosure         0, 10, 50, 100, 500, 1000, 500 ms           Enclosure <td< th=""><th></th><th colspan="2">Short circuit protection</th><th colspan="5">Yes</th></td<>		Short circuit protection		Yes				
Analog output  Current output: 4 to 20 mA  Current output: 2.4 to 20 mA  Maximum load impedance at power supply voltage of 12 V: 300 Ω  Minimum load impedance: 50 Ω  MPa, kPa, kgf(cm², bar, psi, inHg, mmHg  MPa, kPa, kgf/cm², bar, psi  LCD  Number of screens  1) Main screen: 4 digits (7 segments)  2) Sub screen: A digits (7 segments)  4) Main screen: A digits (7 segments)  2) Sub screen: A digits (7 segment		Voltage Output type		Voltage out	put: 1 to 5 V	Voltage output: 0.6 to 5 V		
Current output   Current output   Current output   Coad impedance   Maximum load impedance at power supply voltage of 12 V: 300 Ω at power supply voltage of 24 V: 600 Ω Minimum load impedance: 50 Ω		output	Output impedance	_	Approx. 1 kΩ			
Current output   Load impedance   Maximum load impedance at power supply voltage of 12 V: 300 Ω	Analog output		Output type	Current outp	ut: 4 to 20 mA	Current output: 2.4 to 20 mA		
Input type   Select from Auto-shift or Au	Analog output			Maximum load ii	ge of 12 V: 300 Ω			
Input type			Load impedance		at power supply voltage	ge of 24 V: 600 Ω		
Input mode   Select from Auto-shift or Auto-shift zero.     Input time   Select from Auto-shift zero.     Sm or more     Unit*3   MPa, kPa, kgf/cm², bar, psi, inHg, mmHg   MPa, kPa, kgf/cm², bar, psi     Display type   LCD     Number of screens   3-screen display (Main screen, Sub screen x 2)     Input mode   Sm or more     Number of screens   3-screen display (Main screen, Sub screen x 2)     Input mode   Sm or more     Sub screen x 2     Input mode   Sm or more     Input mode   Sm or more     Input mode   Sm or more     MPa, kPa, kgf/cm², bar, psi, inHg, mmHg   MPa, kPa, kgf/cm², bar, psi     LCD     Number of screens   3-screen display (Main screen, Sub screen x 2)     In Main screen: Red/Green     2) Sub screen: Orange     1) Main screen: 4 digits (7 segments)     2) Sub screen: 4 digits (7 segments)     2) Sub screen: 4 digits (1 segments, 7 segments for other)     Indicator light   Lights up when switch output is turned ON. OUT1, OUT2: Orange     O, 10, 50, 100, 500, 1000, 5000 ms     IP40     Withstand voltage   1000 VAC for 1 minute between terminals and housing     Insulation resistance   50 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing     Insulation resistance   Operating temperature range   Operating/Stored: 35 to 85% RH (No condensation)     Standards   UL/CSA (E216656), CE marking (EMC directive/RoHS directive)								
Input mode   Input time   Select from Auto-shift or Auto-shift zero.	Auto-chift	Input type	)					
Input time				Sel	ect from Auto-shift or Auto-shift z	ero.		
Display type   Screen   Aumber of screen   Aumber of screen   Aumber of screen   Aumber of display digits   Display color   Display color   Aumber of display digits   Aumber of display digits   Aumber of display digits   Display screen: 4 digits (7 segments)   Aumber of display digits   Aumber of display digits   Aumber of display digits   Display screen: 4 digits (7 segments)   Aumber of display digits   Aumber of display digits   Display screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)   Aumber of display digits   Display screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit 11 segments, 7 segments for other)   Display screen: 4 digits (Vpper 1 digit	IIIput		)					
Number of screens   3-screen display (Main screen, Sub screen x 2)				MPa, kPa, kgf/cm², l		MPa, kPa, kgf/cm², bar, psi		
Display color   1) Main screen: Red/Green   2) Sub screen: Orange								
Display color   2) Sub screen: Orange		Number o	f screens					
Number of display digits   1) Main screen: 4 digits (7 segments)   2) Sub screen: 4 digits (7 segments)   2) Sub screen: 4 digits (1) Sub scree	Display	Display co	olor	,				
Number of display digits   2) Sub screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)		,						
Comparison of the content of the		Number o	f display digits					
Digital filter*4		. , ,						
Enclosure   IP40   Withstand voltage   1000 VAC for 1 minute between terminals and housing   Insulation resistance   Insula	B. 1. 1 an 4	Indicator	light	Lights up when switch output is turned ON. OUT1, OUT2: Orange				
Withstand voltage     1000 VAC for 1 minute between terminals and housing       Insulation resistance     50 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing       Operating temperature range     Operating: -5 to 50°C, Stored: -10 to 60°C (No condensation or freezing)       Operating humidity range     Operating/Stored: 35 to 85% RH (No condensation)       Standards     UL/CSA (E216656), CE marking (EMC directive/RoHS directive)       Length of lead wire with connector     2 m			<u> </u>		IS			
Insulation resistance   Insulation resistance   S0 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing								
Insulation resistance   50 MΩ or more (500 VDC measured via megohimmeter) between terminals and housing	Environmental							
Operating temperature range Operating: -5 to 50°C, Stored: -10 to 60°C (No condensation or freezing)  Operating humidity range Operating/Stored: 35 to 85% RH (No condensation)  Standards UL/CSA (E216656), CE marking (EMC directive/RoHS directive)  Length of lead wire with connector 2 m	resistance			50 MΩ or more (500 VDC n	neasured via megohmmeter) betv	ween terminals and housing		
Standards UL/CSA (E216656), CE marking (EMC directive/RoHS directive)  Length of lead wire with connector  2 m								
Length of lead wire with connector 2 m	o	Operating	humidity range					
				UL/CSA (E2166		(HoHS directive)		
					2 m			

- \*1 Value without digital filter (at 0 ms)
- \*2 If the applied pressure fluctuates around the set value, the hysteresis must be set to a value greater than the amount of fluctuation, or chattering will occur.
- \*3 Setting is only possible for models with the units selection function. Only MPa or kPa is available for models without this function.
- \*4 The response time indicates when the set value is 90% in relation to the step input.
- \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

#### **Piping Specifications and Weights**

	Model	M5	01	N01	C4H	C6H	N7H	C4L	C6L	N7L
Port size		M5 x 0.8	R1/8	NPT1/8	_	_	_	_	_	_
	One-touch fitting Straight type	_	_	_	ø4 mm ø5/32 inch	ø6 mm	ø1/4 inch	_	_	_
	One-touch fitting Elbow type	_	_		_	_	_	ø4 mm ø5/32 inch	ø6 mm	ø1/4 inch
Materials of	Sensor pressure receiving area				Silicon					
parts in Piping port (Common)		PBT, CB156, Heat-resistant PPS, O-ring: HNBR								
contact with fluid	Piping port	_	,	ss nickel plating), eel 304, NBR		POM,	Stainless stee	el 304, NBR, 0	C3604	
Weight	Body	24 g	34 g	36 g	27 g	28 g	29 g	30 g	30 g	36 g
weignt	Lead wire with connector					+39 g				

#### **Cable Specifications**

Conductor cross section		0.15 mm² (AWG26)
la sudatau	O.D.	1.0 mm
insulator	Color	Brown, Blue, Black, White, Gray (5-core)
Sheath	Finished O.D.	ø3.5

"Set Pressure Range and Rated Pressure Range," "Functions" → p. 17 "Internal Circuits and Wiring Examples" → From p. 18 "Dimensions" → From p. 20



2 Outputs + Analog Output (Voltage/Current)

# **3-Screen Display High-Precision Digital Pressure Switch**

ZSE20B(F)/ISE20B Series

For the IO-Link compatible type, refer to page 15.


#### **How to Order**





Rated pressure range
 ISE20B −0.1 to 1 MPa

For Positive Pressure ISE20B -





Made to Order (pp. 38 to 42)

Rated pressure range

For Vacuum/ Compound Pressure

ZSE20B	0 to -101 kPa
ZSE20BF	-100 to 100 kPa

2	Output	specification
u	Output	Specification

Symbol	Description
R	NPN open collector 2 outputs + Analog voltage output *1
S	NPN open collector 2 outputs + Analog current output *1
Т	PNP open collector 2 outputs + Analog voltage output *1
V	PNP open collector 2 outputs + Analog current output *1
X	NPN open collector 2 outputs + Copy function
Υ	PNP open collector 2 outputs + Copy function

\*1 Can be switched to auto-shift or copy function

#### **3** Unit specification

Symbol	Description
Nil	Units selection function*1
M	SI units only*2
Р	Units selection function (Initial value psi)*1

- \*1 Under the New Measurement Act, switches with the units selection function are no longer allowed for use in Japan.
- \*2 Fixed units: kPa, MPa

4 Piping specification

Symbol	Description	Symbol	Descript	tion	
M5	M5 female thread	C4L	One-touch fitting ø4 mm	Elbow type	
	Piping port	C6L	One-touch fitting ø6 mm		
01	R1/8 Piping adapter ZS-46-N1	One-touch fitting is shipped with the product.		ped together	
N01	NPT1/8 NPT1/8 Piping adapter ZS-46-N2				

**5** Option 1

<u> </u>	1011 1			
Symbol		Description		
Nil	Without lead	Without lead wire		
w	Lead wire with connector (5-core, 2 m lead wire, With waterproof cover)	ZS-46-5F With waterproof cover		

\* For the lead wire with M12 connector, refer to page 39.

#### **7** Option 3

Symbol	Operation manual*1	Calibration certificate*1
Nil	0	
Υ	_	_
K	0	0
Т	_	0

\*1 All texts are in both English and Japanese.

6 Option 2

	5 1 11			
Symbol	Description			
Nil	None			
<b>A</b> 1	Bracket A (Vertical mounting)		ZS-46-A1	
A2	Bracket B (Horizontal mounting)		ZS-46-A2	
В	Panel mount adapter		ZS-46-B	
D	Panel mount adapter + Front protection cover		ZS-46-D	

#### **Options/Part Nos.**

#### When only optional parts are required, order with the part numbers listed below.

Description	Part no.	Note
Bracket A	ZS-46-A1	Tapping screw: Nominal size 3 x 8 L (2 pcs.)
Bracket B	ZS-46-A2	Tapping screw: Nominal size 3 x 8 L (2 pcs.)
Panel mount adapter	ZS-46-B	_
Panel mount adapter + Front protection cover	ZS-46-D	_
Panel mount adapter (Compatible with the panel holes of the Z/ISE40A)	ZS-46-F	Made to order (Refer to page 41.)
Panel mount adapter + Front protection cover (Compatible with the panel holes of the Z/ISE40A)	ZS-46-G	Made to order (Refer to page 41.)
Lead wire with connector	ZS-46-5F	5-core, 2 m, Waterproof (With waterproof cover)
Lead wire with M12 connector	ZS-46-5FM12	Made to order (Refer to page 39.)
Front protection cover	ZS-27-01	_
R1/8 Piping adapter	ZS-46-N1	R1/8 NPT1/8
NPT1/8 Piping adapter	ZS-46-N2	
One-touch fitting ø4 mm elbow	ZS-46-C4L	_
One-touch fitting ø6 mm elbow	ZS-46-C6L	_
Spacer for fitting extension	P3311276A	Made to order (Refer to page 40.)



### 3-Screen Display High-Precision Digital Pressure Switch ZSE20B(F)/ISE20B Series

For pressure switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

#### **Specifications**

	Mo	odel	ZSE20B	(Vacuum pressi	re)	ZSE20BF (Compound pressure)	ISE20B (Positive pressure)
Applicable fluid				ir, N	on-corrosive gas, Non-flammab	le gas	
••	Rated pre	ssure range	0.01	to -101.0 kPa		-100.0 to 100.0 kPa	-0.100 to 1.000 MPa
_	Display/S	et pressure range	10.0	to -105.0 kPa		-105.0 to 105.0 kPa	-0.105 to 1.050 MPa
Pressure	Display/Smallest settable increment				0.1	kPa	0.001 MPa
Withstand pressure			500 kPa 1.5 MPa			1.5 MPa	
	Power su	pply voltage		12	to 2	4 VDC ±10%, Ripple (p-p) 10%	or less
Power supply		onsumption				35 mA or less	
	Protection	<u>.</u> 1				Polarity protection	
	Display a	ccuracy		±2%	F.S.	±1 digit (Ambient temperature of	f 25 ±3°C)
	Repeatab	ility				±0.2% F.S. ±1 digit	,
Accuracy	Analog ou	utput accuracy		±2	.5%	F.S. (Ambient temperature of 25	5 ±3°C)
-	Analog ou	utput linearity				±1% F.S.	,
	Temperat	ure characteristics				±2% F.S. (25°C standard)	
	Output ty	pe			NF	N or PNP open collector 2 outp	uts
	Output m			Hysteresis mo		Vindow comparator mode, Error	
	Switch op			•		Normal output, Reversed output	· · · · · · · · · · · · · · · · · · ·
	Max. load					80 mA	
	Max. appl	ied voltage (NPN only)				28 V	
Switch output		Itage drop (Residual voltage)			1 \	or less (at load current of 80 m	nA)
	Delay time		1.5	ms or less (with	anti	-chattering function: 20, 100, 50	0, 1000, 2000, 5000 ms)
	_	Hystoresis mode					
	Hysteresis Window comparator mode		Variable from 0*2				
	Short circuit protection		Yes				
	Voltage Output type			Voltage output: 1 to 5 V Voltage output: 0.6			
	output Output impedance		Approx. 1 kΩ				
		Output type		Current output: 4 to 20 mA			
Analog output	Current output Load impedance		Maximum load impedance at power supply voltage of 12 V: 300 $\Omega$ at power supply voltage of 24 V: 600 $\Omega$ Minimum load impedance: 50 $\Omega$				
	Input type		Non-voltage input: 0.4 V or less				
Auto-shift	Input mod		Select from Auto-shift or Auto-shift zero.				
input	Input time		5 ms or more				2010.
	Unit*3						MPa, kPa, kgf/cm², bar, psi
	Display ty	rpe		a, a,g., o	, ~	LCD	a, a,g., , za., pe.
	Number o	•	3-screen display (Main screen, Sub screen x 2)				
Display	Display co		1) Main screen: Red/Green 2) Sub screen: Orange				
	Number of display digits		Main screen: 4 digits (7 segments)     Sub screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)				
Indicator light			Lights up when switch output is turned ON. OUT1, OUT2: Orange				
Digital filter*4			0, 10, 50, 100, 500, 1000, 5000 ms				
-	Enclosure	)	IP65				
F	Withstand	l voltage	1000 VAC for 1 minute between terminals and housing				
Environmental	Insulation resistance		50 M $\Omega$ or more (500 VDC measured via megohmmeter) between terminals and housing				
resistance		temperature range	Operating: –5 to 50°C, Stored: –10 to 60°C (No condensation or freezing)				
		humidity range	Operating/Stored: 35 to 85% RH (No condensation)				
Standards		, ,	UL/CSA (E216656), CE marking (EMC directive/RoHS directive)				
Length of lead	wire with c	onnector				2 m	•
ى دەرىلارىي دەرىلى سىلىلىلىلىلىلىلىلىلىلىلىلىلىلىلىلىلى			1				

- \*1 Value without digital filter (at 0 ms)
- \*2 If the applied pressure fluctuates around the set value, the hysteresis must be set to a value greater than the amount of fluctuation, or chattering will occur.
- \*3 Setting is only possible for models with the units selection function. Only MPa or kPa is available for models without this function.
- \*4 The response time indicates when the set value is 90% in relation to the step input.
- \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

#### **Piping Specifications and Weights**

	Model	M5	01	N01	C4L	C6L		
Port size		M5 x 0.8	R1/8	NPT1/8	_	_		
	One-touch fitting Straight type	1	-	1	_	1		
	One-touch fitting Elbow type		_	_	ø4 mm ø5/32 inch	ø6 mm		
	Sensor pressure receiving area	Silicon						
Materials of	Piping port (Common)	PBT, CB156, Heat-resistant PPS, O-ring: HNBR						
parts in contact with fluid	Piping port	_	nickel platin	lectroless g), Stainless 04, NBR	POM, Stai 304, NBF			
Weight	Body	24 g	34 g	36 g	30 g	30 g		
weignt	Lead wire with connector	+39 g						

#### **Cable Specifications**

Conductor cross section		0.15 mm <sup>2</sup> (AWG26)
Inquilator	O.D.	1.0 mm
Insulator	Color	Brown, Blue, Black, White, Gray (5-core)
Sheath Finished O.D.		ø3.5

"Set Pressure Range and Rated Pressure Range," "Functions" ⇒ p. 17 "Internal Circuits and Wiring Examples" → From p. 18 "Dimensions" → From p. 20



### IO-Link Compatible (1 Output)


### 3-Screen Display High-Precision **Digital Pressure Switch**



# ZSE20B(F)-L/ISE20B-L Series

For 2 outputs + analog output type, refer to page 13.

#### **How to Order**

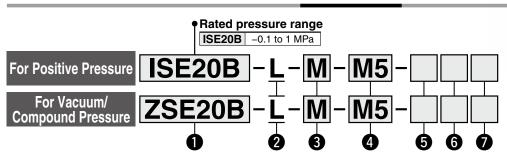

#### Rated pressure range

ZSE20B	0 to -101 kPa
ZSE20BF	-100 to 100 kPa

#### 2 Output specification

Symbol	Description
	IO-Link/Switch: 1 output ← (PNP or NPN switching type for switch output)

#### 3 Unit specification

Symbol	Description			
Nil	Inits selection function*1			
M	SI units only*2			
Р	Jnits selection function (Initial value psi)*1			

- \*1 Under the New Measurement Act, switches with the units selection function are no longer allowed for use in Japan.
- \*2 Fixed units: kPa, MPa

#### 4 Piping specification

<u> </u>			
Symbol	Description		
M5	M5 female thread  Piping port		
01 R1/8 Piping adapte ZS-46-N1			
N01	NPT1/8  NPT1/8 Piping adapter ZS-46-N2		

#### Option 1

Symbol	Description			
Nil	Without lead	wire		
w	Lead wire with connector (5-core, 2 m lead wire, With waterproof cover)	ZS-46-5F With waterproof cover		

\* For the lead wire with M12 connector, refer to page 39.

#### Option 3

Symbol	Operation manual*1	Calibration certificate*1
Nil	0	_
Υ	_	_
K	0	0
Т	_	0

\*1 All texts are in both English and Japanese.

#### Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.				
Description	Part no.	Note		
Bracket A	ZS-46-A1	Tapping screw: Nominal size 3 x 8 L (2 pcs.)		
Bracket B	ZS-46-A2	Tapping screw: Nominal size 3 x 8 L (2 pcs.)		
Panel mount adapter	ZS-46-B	_		
Panel mount adapter + Front protection cover	ZS-46-D	_		
Lead wire with connector	ZS-46-5F	5-core, 2 m, Waterproof (With waterproof cover)		
Lead wire with M12 connector	ZS-46-5FM12	Made to order (Refer to page 39.)		
Front protection cover	ZS-27-01	— — — —		
R1/8 Piping adapter	ZS-46-N1	R1/8 NPT1/8		
NPT1/8 Piping adapter	ZS-46-N2			

#### 6 Option 2

	11011 2			
Symbol	Description			
Nil	None			
A1	Bracket A (Vertical mounting)	ZS-46-A1		
<b>A2</b>	Bracket B (Horizontal mounting)	ZS-46-A2		
В	Panel mount adapter	ZS-46-B		
D	Panel mount adapter + Front protection cover	ZS-46-D		

refer to the "Operation Manual" on the SMC website.

For pressure switch precautions and specific product precautions,

Specifications/IO-Link Compatible

Model		ZSE20B-L (Vacuum pressure)	ZSE20BF-L (Compound pressure)	ISE20B-L (Positive pressure)		
Applicable fluid			Air, Non-corrosive gas, Non-flammable gas			
Rated pressure range		0.0 to -101.0 kPa	–100.0 to 100.0 kPa	-0.100 to 1.000 MPa		
_		ressure range	10.0 to -105.0 kPa	-105.0 to 105.0 kPa	-0.105 to 1.050 MPa	
Pressure		est settable increment	0.1		0.001 MPa	
	Withstand pre		500		1.5 MPa	
	Power supply voltage	When used as a switch output device (When not used as an IO-Link device)	12 to 24 VDC ±10% with 10% voltage ripple or less			
Power supply	When used as an IO-Link device		18 to 30 VDC, including ripple (p-p) 10%			
	Current consi	umption		35 mA or less		
	Protection			Polarity protection		
	Display accur	acy	±2% F.S.	±1 digit (Ambient temperature of	25 ±3°C)	
Accuracy	Repeatability			±0.2% F.S. ±1 digit		
	Temperature	characteristics		±2% F.S. (25°C standard)		
	Output type			from NPN or PNP open collector	_ ·	
	Output mode		Hysteresis, V	Vindow comparator, Error output	, Output OFF	
	Switch operat	tion		Normal output, Reversed output		
	Max. load cur	rent		80 mA		
Switch output	Max. applied voltage			30 V (NPN output)		
(SIO mode)	Internal voltage drop (Residual voltage)		1.5 V or less (at load current of 80 mA)			
	Delay time*1		1.5 ms or less, variable from 0 to 60 s/0.01 s increments			
	Hysteresis mode Window comparator mode		Variable from 0*2			
Short circuit protection		Yes				
	Unit*3		MPa, kPa, kgf/cm², bar, psi, inHg, mmHg MPa, kPa, kgf/cm², bar, p			
	Display type		LCD			
Display	Number of screens		3-screen display (Main screen, Sub screen x 2)			
Display	Display color		Main screen: Red/Green, Sub screen: Orange			
	Number of dis		Main screen: 4 digits (7 segments), Sub screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)			
	Indicator light		Lights up when switch output is turned ON (OUT1, OUT2: Orange)			
Digital filter*4			Variable from 0 to 30 s/0.01 s increments			
Length of lead		ector	2 m			
	Enclosure			IP65		
Environmental	Withstand vol			for 1 minute between terminals a		
resistance	Insulation res			neasured via megohmmeter) bet		
		nperature range		C, Stored: -10 to 60°C (No cond		
<u> </u>	Operating hu	midity range	Operating	/Stored: 35 to 85% RH (No cond	densation)	
Standards	10.1.7.			CE, RoHS		
	IO-Link type			Device		
	IO-Link version	,	V1.1			
	Communicati			COM2 (38.4 kbps)		
	Configuration		IODD file*5			
Communication I	Minimum cyc		2.3 ms			
	Process data length		Input data: 2 bytes, Output data: 0 bytes			
(IO-Link mode)			•			
(IO-Link mode)	On request da	ata communication		Yes		
(IO-Link mode)		ata communication function		Yes Yes Yes		

\*1 Value without digital filter (at 0 ms)

**Vendor ID** 

- \*2 If the applied pressure fluctuates around the set value, the hysteresis must be set to a value greater than the amount of fluctuation, or chattering will occur.
- \*3 Setting is only possible for models with the units selection function. Only MPa or kPa is available for models without this function.
- \*4 The response time indicates when the set value is 90% in relation to the step input.
- \*5 The configuration file can be downloaded from the SMC website, https://www.smcworld.com
- \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

#### **Piping Specifications and Weights**

Model		M5	01	N01	
Port size		M5 x 0.8	R1/8	NPT1/8	
	Sensor pressure receiving area		Silicon		
Materials of parts in contact with fluid	Piping port (Common)	PBT, CB156, Heat-resistant PPS, O-ring: HNBR			
Contact with huld	Piping port	<ul> <li>C3604 (Electroless nickel plating), Stainless steel 304, NB</li> </ul>		ing), Stainless steel 304, NBR	
Weight	Body	24 g	34 g 36 g		
	Lead wire with connector	+39 g			

#### **Cable Specifications**

131 (0 x 0083)

Conductor cross section		0.15 mm <sup>2</sup> (AWG26)	
Inquistor	O.D.	1.0 mm	
Insulator	Color	Brown, Blue, Black, White, Gray (5-core)	
Sheath Finished O.D.		ø3.5	

"Set Pressure Range and Rated Pressure Range," "Functions" → p. 17 "Internal Circuits and Wiring Examples" 

p. 19 "Dimensions" 

From p. 20




### $ZSE20\square(F)/ISE20\square$ Series


#### Set Pressure Range and Rated Pressure Range


#### Set the pressure within the rated pressure range.


The set pressure range is the range of pressure within which setting is possible. The rated pressure range is the range of pressure that satisfies the specifications (accuracy, linearity, etc.) of the switch. Although it is possible to set a value outside the rated pressure range, the specifications cannot be guaranteed even if the value stays within the set pressure range.

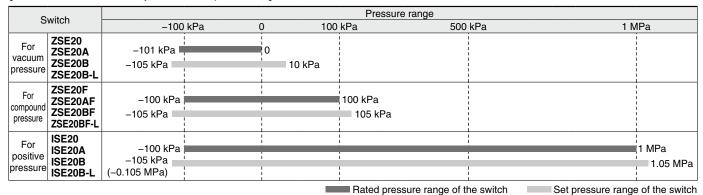

#### Analog Output\*1






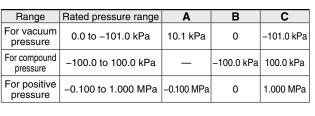



\*1 Excluding the 20/20B(F)-L


#### **IO-Link: Process Data**

#### Relationship between the process data and pressure value





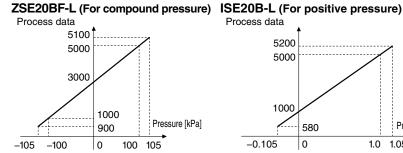




#### **Functions**

Sub screen setting function	The display of the sub screen can be selected.		
Auto-preset function	This function calculates a rough set value automatically based on the on-going operation.		
Display value fine adjustment function	Evens out deviations in the displayed value		
Peak value indication function	Can retain the maximum pressure value displayed during measurement		
Bottom value indication function	Can retain the minimum pressure value displayed during measurement		
Key-lock function (Selectable security code)	The keyboard can be locked to prevent the accidental operation of the operation switch.		
Zero-clear function	The pressure display can be set to zero when the pressure is open to the atmosphere.		
Error indication function	This function displays the error location and content when a problem or error has occurred.		
Anti-chattering function	Prevents possible malfunctions due to sudden fluctuations in the primary pressure by adjusting the delay time		
Units selection function	Can convert the display value		
Power saving mode	Reduces power consumption		
Display resolution switch function	Converts the display resolution from the normal value of 1/1000 to 1/100  Can reduce flickering of the monitor		
kPa ↔ MPa switch function	Converts the unit between kPa and MPa		
Copy function*1	The settings of the copy source can be copied to the copy destination.		
Auto-shift function*1	Measures the pressure at the time of external input and uses it as a reference to correct the set value of the switch		
Auto cilit iulicticii	inducation the product at the time of external input and deed it as a relevance to derived the cot value of the evitten		


<sup>\*1</sup> Not available for the 20/20B-L

### 3-Screen Display High-Precision Digital Pressure Switch $ZSE20 \square (F)/ISE20 \square Series$


#### **Internal Circuits and Wiring Examples**




#### -N NPN (1 output)

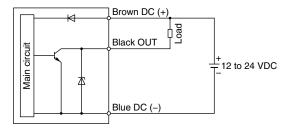


#### -P PNP (1 output)

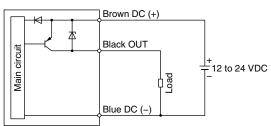


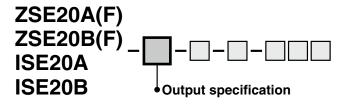


#### -X NPN (2 outputs) + Copy function

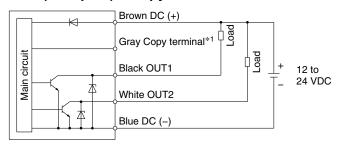


#### -Y PNP (2 outputs) + Copy function

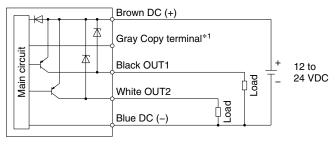

### -R: NPN (2 outputs) + Analog voltage output-S: NPN (2 outputs) + Analog current output

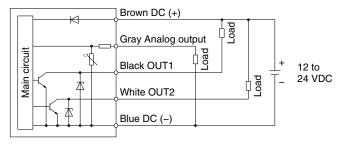


-T: PNP (2 outputs) + Analog voltage output -V: PNP (2 outputs) + Analog current output

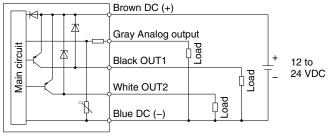


\*1 Refer to page 37.

### ZSE20□(F)/ISE20□ Series


#### **Internal Circuits and Wiring Examples**

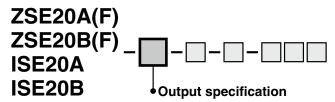

- -R: NPN (2 outputs) + Auto-shift input
- -S: NPN (2 outputs) + Auto-shift input

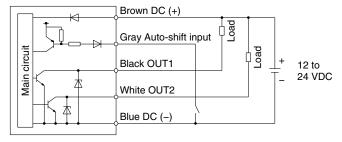


-R: NPN (2 outputs) + Copy function -S: NPN (2 outputs) + Copy function

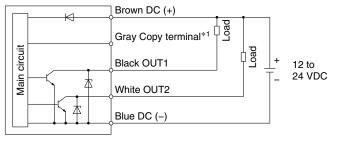



\*1 Refer to page 37.

#### -T: PNP (2 outputs) + Auto-shift input -V: PNP (2 outputs) + Auto-shift input

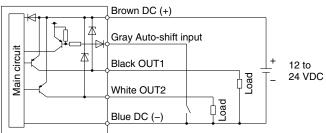

-T: PNP (2 outputs) + Copy function -V: PNP (2 outputs) + Copy function

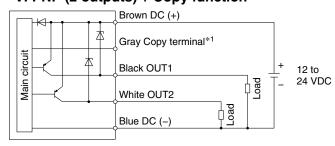





-L: (IO-Link/Switch: 1 output)

When used as a switch output device (When not used as an IO-Link device = When in SIO mode)

NPN open collector 1 output setting

PNP open collector 1 output setting

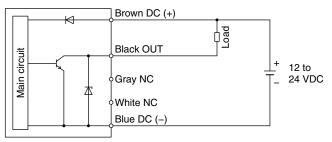

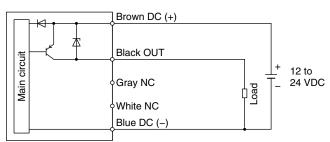


#### When used as an IO-Link device




Made to Order

#### **Dimensions**





M5 female thread

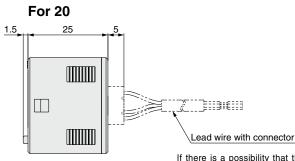

If there is a possibility that the atmospheric vent port of the switch will be exposed to water or dust, insert a tube into the atmospheric vent port and route the other end of the tube to a safe place away from water or dust. (Z/ISE20B)

\* For tubing, please use the SMC TU0425 (polyurethane, O.D. ø4, I.D. ø2.5) for the pressure switch.



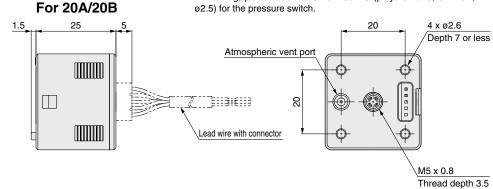





R1/8



NPT1/8

Piping specification	Port size	Α
01	R1/8	Width across flats 10
N01	NPT1/8	Width across flats 12



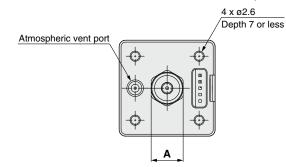


⌽

### C4H, C6H, N7H

#### One-touch fitting Straight type ø4 mm, ø6 mm, ø1/4 inch

Piping specification	Α	В
C4H	15.6	ø8
C6H	16.5	ø10
N7H	16	ø10.3




# Width across flats 2.5

### C4L, C6L, N7L

#### One-touch fitting Elbow type ø4 mm, ø6 mm, ø1/4 inch

Piping specification	Α	В	С	D
C4L	15.2	17.5	4	ø8.2
C6L	15.2	18.3	4	ø10.4
N7L	20.9	20.6	6	ø11.1






Width across flats C

### $ZSE20\square (F)/ISE20\square$ Series


#### **Dimensions**


With bracket





**Bracket A** 

(Part no.: ZS-46-A1)









25


8


The bracket configuration allows for mounting in four orientations.




**Bracket B** 


(Part no.: ZS-46-A2)







The bracket configuration allows for mounting in four orientations.




 $\ast\,$  When using the bracket B, install it by taking the dimensions of the piping part into consideration.



Made to


#### **Dimensions**









Panel mount adapter (Part no.: ZS-46-B)



3-Screen Display High-Precision Digital Pressure Switch  $ZSE20 \square (F)/ISE20 \square Series$ 



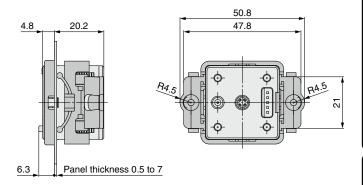





Panel mount adapter + Front protection cover

(Part no.: ZS-46-D)







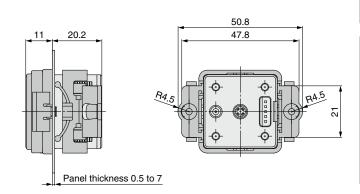


#### Lead wire with connector



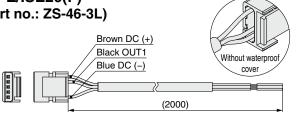

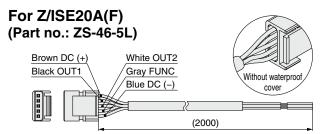

#### For Z/ISE20B(F)(-L) (Part no.: ZS-46-5F)

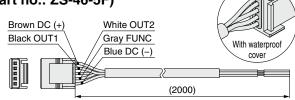


**SMC** 

### $ZSE20\square(F)/ISE20\square$ Series


#### **Dimensions**

#### **Panel fitting dimensions**


Individual mounting




Multiple (2 pcs. or more) secure mounting <Horizontal>

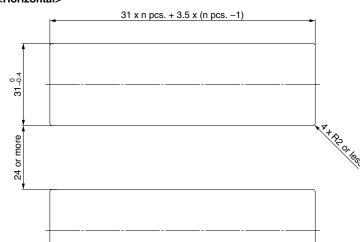


Panel mount example <Horizontal>

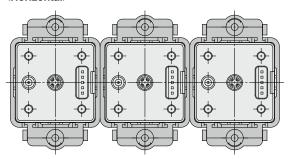

<Vertical>

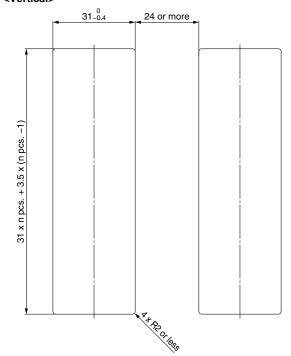

#### Panel mount example <Vertical>

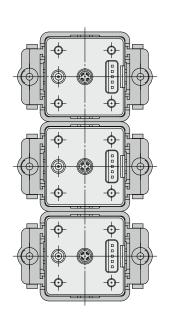


RoHS

2 Outputs + Analog Output (Voltage/Current)

3-Screen Display High-Precision
Digital Pressure Switch for General Fluids

ZSE20C(F)/ISE20C(I

#### **How to Order**



For Vacuum/ Compound Pressure

For Positive Pressure

Rated pressure range

	<u> </u>
ZSE20C	0 to -101 kPa
ZSE20CF	-100 to 100 kPa

Description Units selection function\*2

Units selection function (Initial value psi)\*3 \*2 Under the New Measurement Act, switches with the units selection function are no longer allowed for use in Japan.

2 Output specification

Symbol	Description
R	NPN open collector 2 outputs + Analog voltage output*1
S	NPN open collector 2 outputs + Analog current output*1
Т	PNP open collector 2 outputs + Analog voltage output*1
٧	PNP open collector 2 outputs + Analog current output*1
X	NPN open collector 2 outputs + Copy function
Υ	PNP open collector 2 outputs + Copy function

\*1 Can be switched to auto-shift or copy function

#### Piping specification

Symbo	Description			
02	R1/4 (M5 female threaded)			
N02	NPT1/4 (M5 female threaded)			
F02	G1/4 (M5 female threaded)			
C01	Rc1/8			
A2	URJ1/4 (Face seal fitting)			
B2	TSJ1/4 (Compression fitting)			

#### \*3 Fixed units: kPa, MPa A Pining direction


Unit specification

SI units only\*3

Piping direction				
	Rear ported			
Nil				
	Bottom ported			
L				

Symbol	Description
Nil	Without lead wire
	Lead wire with connector, 5-col (2 m lead wire, With waterproof

6 Option 1



\* For the lead wire with M12 connector, refer to page 39.

#### Options/Part Nos.

#### When only optional parts are required, order with the part numbers listed below.

when only optional parts are required, order with the part numbers listed below.					
Description	Part no.	Note			
Bracket A	ZS-46-A1	For rear ported/Tapping screw: Nominal size 3 x 8 L (2 pcs.)			
Bracket C	ZS-46-E	For bottom ported/Tapping screw: Nominal size 3 x 10 L (2 pcs.)			
Panel mount adapter	ZS-46-B	Rear ported			
Farier mount adapter	ZS-35-B	Bottom ported			
Panel mount adapter +	ZS-46-D	Rear ported			
Front protection cover	ZS-35-E	Bottom ported			
Panel mount adapter (Compatible with the panel holes of the Z/ISE80)	ZS-46-F	Rear ported, Made to order (Refer to page 42.)			
Panel mount adapter + Front protection cover (Compatible with the panel holes of the ZISE80)		Rear ported, Made to order (Refer to page 42.)			
Lead wire with connector	ZS-46-5F	5-core, 2 m, Waterproof (With waterproof cover)			
Lead wire with M12 connector	ZS-46-5FM12	Made to order (Refer to page 39.)			
Front protection cover	ZS-27-01	Rear ported			
From protection cover	ZS-35-01	Bottom ported			

#### Option 2

Note that the optional parts that can be used vary depending on the piping direction.

Made to order (pp. 38 to 42)

	in the pripring and contains	
Symbol	Description	
Nil	None	

Rear ported (6) Piping direction: Nil)

Symbol	De	scription	Symbol		Description	
<b>A</b> 1	Bracket A	ZS-46-A1	В	Panel mount adapter		ZS-46-B
D	Panel mount adapter + Front protection cover					ZS-46-D

Bottom ported (6) Piping direction: L)

		ted ( Piping direction: L)	
Symbol		Description	
А3	Bracket C		ZS-46-E
E	Panel mount adapter		ZS-35-B
F	Panel mount adapter + Front protection cover		ZS-35-E

#### 8 Option 3

**SMC** 

$\overline{}$		P C	
Syml	bol	Operation manual*4	Calibration certificate*4
Ni	ı	0	_
Y		_	_
K		0	0
T	'	_	0

\*4 All texts are in both English and Japanese.

### ZSE20C(F)/ISE20C(H) Series

#### **Specifications**

For pressure switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

	M	odel	ZSE20C (Vacuum pressure)	ZSE20CF (Compound pressure)	ISE20C (Positive pressure)	ISE20CH (Positive pressure)		
Applicable fluid	i		Liquids a	and gases that do not co	rrode stainless steel 630	and 304		
	Rated pre	ssure range	0.0 to -101.0 kPa	-100.0 to 100.0 kPa	-0.100 to 1.000 MPa	-0.100 to 2.000 MPa		
Pressure	Display/S	et pressure range	10.0 to -105.0 kPa	-105.0 to 105.0 kPa	-0.105 to 1.050 MPa	-0.105 to 2.100 MPa		
ressure	Display/Smallest settable increment		0.1	kPa	0.001	I MPa		
	Withstand	d pressure	500	kPa	2 MPa	4 MPa		
	Power su	pply voltage	1	2 to 24 VDC ±10% with	10% voltage ripple or les	SS		
Power supply	Current c	onsumption	35 mA or less					
	Protection	n	Polarity protection					
	Display a	ccuracy	±2% F.S. ±1 digit (Ambient temperature of 25 ±3°C)					
	Repeatab	ility		±0.2% F.	S. ±1 digit			
Accuracy	Analog or	utput accuracy		±2.5% F.S. (Ambient to	emperature of 25 ±3°C)			
	Analog or	utput linearity		±1%	F.S.			
	Temperat	ure characteristics		±3% F.S. (25	°C standard)			
	Output ty	ре		NPN or PNP open	collector 2 outputs			
	Output m	ode	Hysteresis	mode, Window compara	tor mode, Error output, 0	Output OFF		
	Switch op	peration		Normal output,	Reversed output			
	Max. load	current		80	mA			
Switch output	Max. appl	ied voltage (NPN only)		28	3 V			
	Internal vo	Itage drop (Residual voltage)		1 V or less (at load	d current of 80 mA)			
	Delay tim	e*1	1.5 ms or less (	with anti-chattering funct	ion: 20, 100, 500, 1000,	2000, 5000 ms)		
		Hysteresis mode						
	Hysteresis	Window comparator mode	Variable from 0*2					
	Short circ	uit protection	Yes					
	Voltage	Output type	Voltage output: 1 to 5 V Voltage output: 0.6 to 5 V Voltage output: 0.8 to 5 V					
	output	Output impedance	Approx. 1 kΩ					
Analog output		Output type	Current output: 4 to 20 mA					
Analog output	Current output	Load impedance	Maximum load impedance at power supply voltage of 12 V: 300 $\Omega$ at power supply voltage of 24 V: 600 $\Omega$ Minimum load impedance: 50 $\Omega$					
	Input type	)		Non-voltage inp	out: 0.4 V or less			
Auto-shift	Input mod		Select from Auto-shift or Auto-shift zero.					
input	Input time	)	5 ms or more					
	Unit*3		MPa, kPa, kgf/cm², l	par, psi, inHg, mmHg	MPa, kPa, kgf/cm², bar, psi			
	Display ty	уре	LCD					
	Number o	f screens	3-screen display (Main screen, Sub screen x 2)					
Display	Display c	olor	1) Main screen: Red/Green 2) Sub screen: Orange					
	Number o	of display digits	Main screen: 4 digits (7 segments)     Sub screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)					
Indicator light			Lights up when switch output is turned ON (OUT1, OUT2: Orange)					
Digital filter*4				0, 10, 50, 100, 50	0, 1000, 5000 ms			
	Enclosure	)	IP65					
	Withstand	d voltage	250 VAC for 1 minute between terminals and housing					
Environmental resistance	Insulation resistance		$2\mathrm{M}\Omega$ or more (50 VDC measured via megohmmeter) between terminals and housing					
i coiotaille	Operating	temperature range	Operating: –5 to 50°C, Stored: –10 to 60°C (No condensation or freezing)					
	Operating	humidity range	Operating/Stored: 35 to 85% RH (No condensation)					
Standards		· · · · · ·	UL/CSA (E216656), CE marking (EMC directive/RoHS directive)					
Length of lead	wire with c	onnector		2	m	·		
1 Value without								

- \*1 Value without digital filter (at 0 ms)
- \*2 If the applied pressure fluctuates around the set value, the hysteresis must be set to a value greater than the amount of fluctuation, or chattering will occur.
- \*3 Setting is only possible for models with the units selection function. Only MPa or kPa is available for models without this function.
- \*4 The response time indicates when the set value is 90% in relation to the step input.
- \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

#### **Piping Specifications and Weights**

	Model		N02	F02	C01	A2	B2
Port siz	ze	R1/4	NPT1/4	G1/4	Rc1/8	URJ1/4	TSJ1/4
Materials	of parts in contact with fluid	Pressure se	nsor: Stainles	s steel 630, F	itting: Stainle	ss steel 304,	Grease-free
	Body (Rear ported) Weight Body (Bottom ported)		51 g	48 g	47 g	54 g	46 g
Weight			78 g	74 g	65 g	81 g	72 g
	Lead wire with connector	+39 g					

#### **Cable Specifications**


Conductor cross section		0.15 mm <sup>2</sup> (AWG26)	
Insulator	O.D.	1.0 mm	
	Color	Brown, Blue, Black, White, Gray (5-core	
Sheath	Finished O.D.	ø3.5	



#### Set Pressure Range and Rated Pressure Range

#### Set the pressure within the rated pressure range.

The set pressure range is the range of pressure within which setting is possible. The rated pressure range is the range of pressure that satisfies the specifications (accuracy, linearity, etc.) of the switch. Although it is possible to set a value outside the rated pressure range, the specifications cannot be guaranteed even if the value stays within the set pressure range.

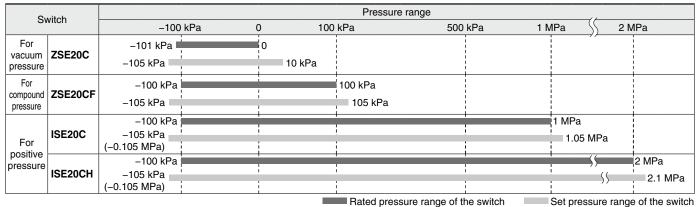

#### Analog Output

#### Voltage output **Current output** Range Rated pressure range В С For vacuum 0.0 to -101.0 kPa 10.1 kPa 0 -101.0 kPa Analog output [mA] 20 pressure Analog output [V] For compound -100.0 to 100.0 kPa -100.0 kPa 100.0 kPa -0.100 to 1.000 MPa | -0.100 MPa 1.000 MPa For positive -0.100 to 2.00 MPa | -0.100 MPa\*1 2.00 MPa \*1 Analog output is 0.8 [V] or 3.2 [mA] at the pressure A. 0.6

Pressure

#### **Functions**

В

C


Pressure

В


Sub screen setting function	The display of the sub screen can be selected.	
Auto-preset function	This function calculates a rough set value automatically based on the on-going operation.	
Display value fine adjustment function	Evens out deviations in the displayed value	
Peak value indication function	Can retain the maximum pressure value displayed during measurement	
Bottom value indication function	Can retain the minimum pressure value displayed during measurement	
ey-lock function (Selectable security code)  The keyboard can be locked to prevent the accidental operation of the operation switch		
Zero-clear function	The pressure display can be set to zero when the pressure is open to the atmosphere.	
Error indication function	This function displays the error location and content when a problem or error has occurred.	
Anti-chattering function	Prevents possible malfunctions due to sudden fluctuations in the primary pressure by adjusting the delay time	
Units selection function	Can convert the display value	
Power saving mode	Reduces power consumption	
Display resolution switch function	Converts the display resolution from the normal value of 1/1000 to 1/100	
Display resolution switch function	Can reduce flickering of the monitor	
kPa ↔ MPa switch function	Converts the unit between kPa and MPa	
Copy function	The settings of the copy source can be copied to the copy destination.	
Auto-shift function	Measures the pressure at the time of external input and uses it as a reference to correct the set value of the switch	

### ZSE20C(F)/ISE20C(H) Series


#### **Internal Circuits and Wiring Examples**




#### -X NPN (2 outputs) + Copy function

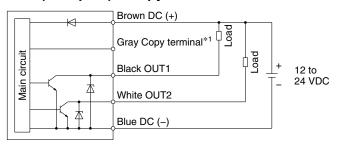


-Y PNP (2 outputs) + Copy function

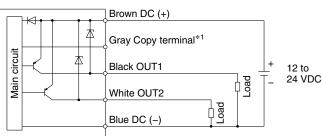


#### -R: NPN (2 outputs) + Analog voltage output -S: NPN (2 outputs) + Analog current output

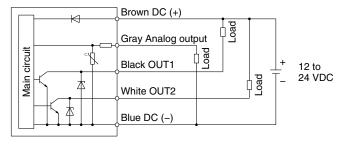


-T: PNP (2 outputs) + Analog voltage output -V: PNP (2 outputs) + Analog current output

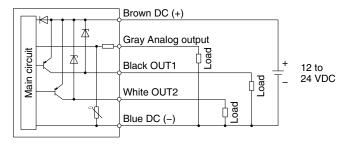


#### -R: NPN (2 outputs) + Auto-shift input -S: NPN (2 outputs) + Auto-shift input

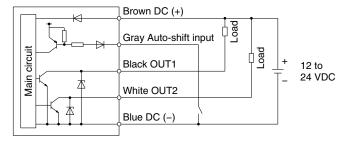


-T: PNP (2 outputs) + Auto-shift input -V: PNP (2 outputs) + Auto-shift input

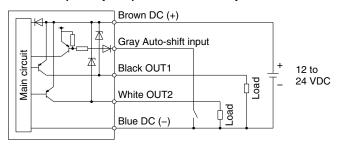

#### -R: NPN (2 outputs) + Copy function -S: NPN (2 outputs) + Copy function

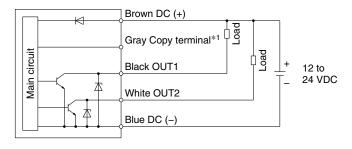


#### -T: PNP (2 outputs) + Copy function -V: PNP (2 outputs) + Copy function

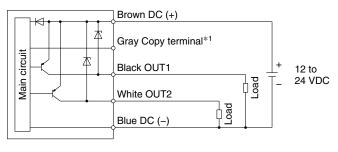

Made to Order


#### **Dimensions**




**N02** 

NPT1/4



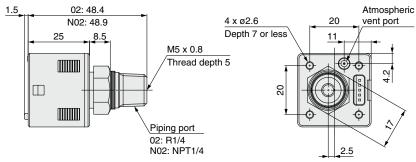





If there is a possibility that the atmospheric vent port of the switch will be exposed to water or dust, insert a tube into the atmospheric vent port and route the other end of the tube to a safe place away from water or dust.

- \* For tubing, please use the SMC TU0425 (polyurethane, O.D. ø4, I.D. ø2.5) for the pressure switch.
- \* If it is expected that the pressure, such as water hammer or surge pressure, will fluctuate rapidly, refer to the precautions in the Operation Manual on the SMC website, https://www.smcworld.com


F02 G1/4






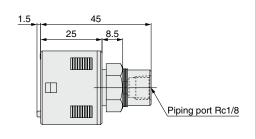

**URJ1/4** 

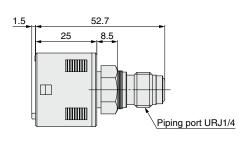




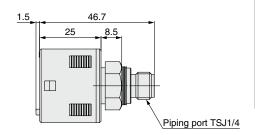


### ZSE20C(F)/ISE20C(H) Series

#### **Dimensions**

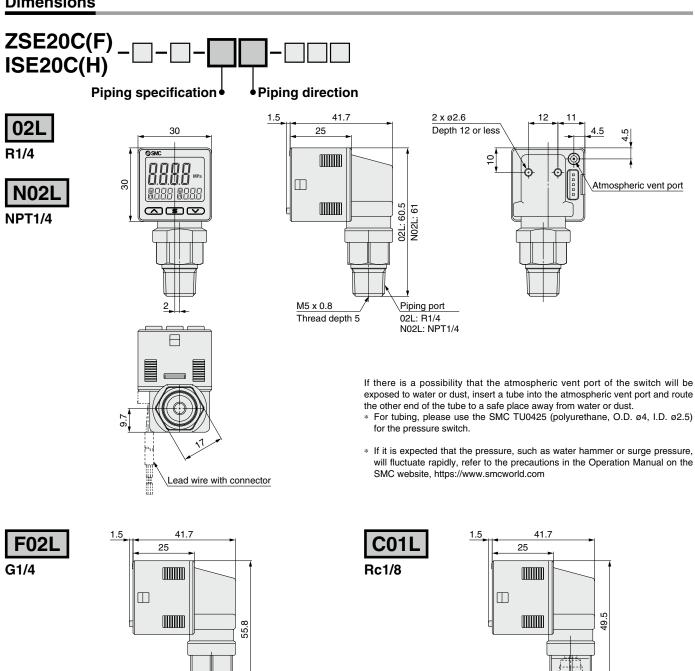





ø17


Piping port G1/4

Gasket

Thread depth 5

M5 x 0.8






Piping port Rc1/8







With bracket





**A1** 

**Bracket A (Rear ported)** (Part no.: ZS-46-A1)












**A3** 


**Bracket C (Bottom ported)** 

(Part no.: ZS-46-E)

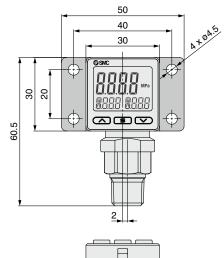







### ZSE20C(F)/ISE20C(H) Series

#### **Dimensions**


Panel mount adapter






Panel mount adapter (Rear ported)

(Part no.: ZS-46-B)

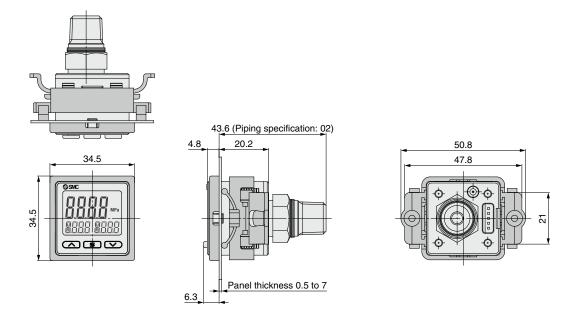





Panel mount adapter (Bottom ported) (Part no.: ZS-35-B)

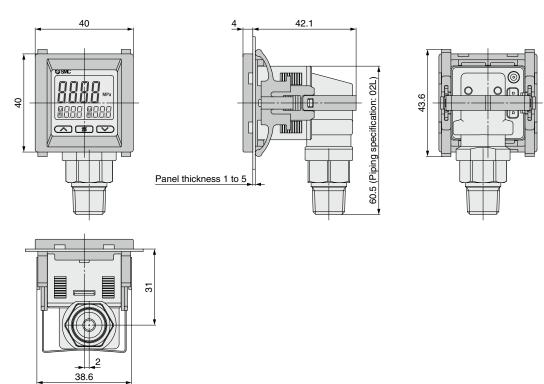

Function Details

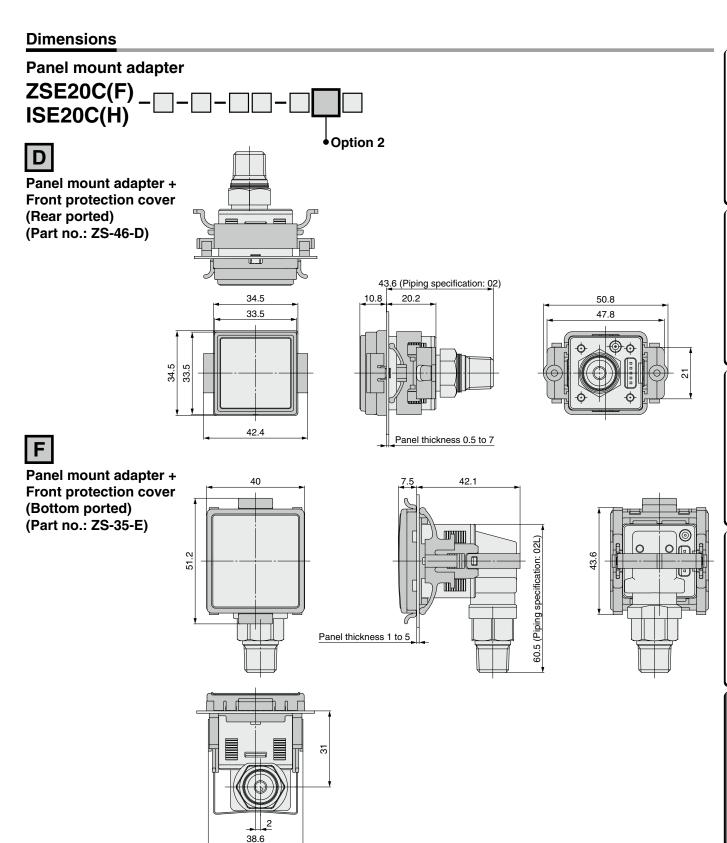

**SMC** 

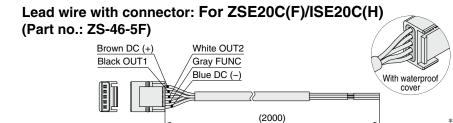


\* For the lead wire with M12 connector, refer to page 39.


### ZSE20C(F)/ISE20C(H) Series

#### **Dimensions**


#### Panel fitting dimensions (Rear ported)




Multiple (2 pcs. or more) secure mounting <Horizontal>

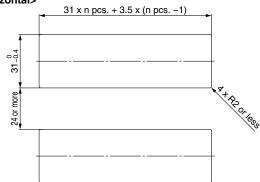


Panel mount example <Horizontal>







Panel mount example <Vertical>



Panel fitting dimensions (Bottom ported)




Multiple (2 pcs. or more) secure mounting <Horizontal>

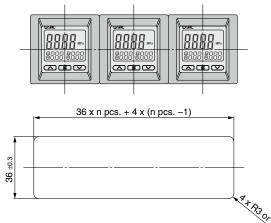






# ZSE20□(F)/ISE20□ Series Function Details

Display examples of the main and sub (set value) screens of each mode. (For ISE20□ (for Positive pressure))

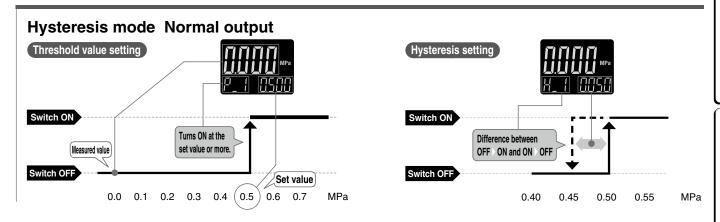

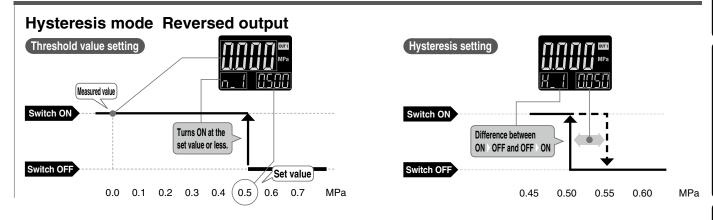

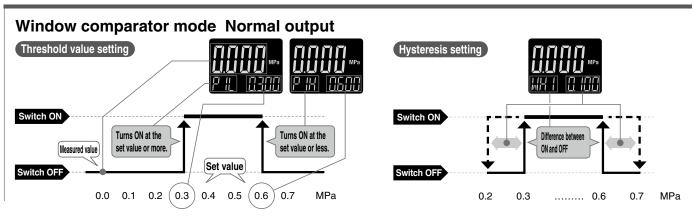

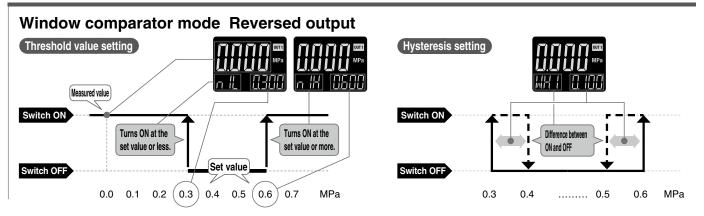

### $ZSE20\square(F)/ISE20\square$ Series


#### **Function Details**

The  $F\square$  in ( ) shows the function code number. For details about operation procedures and function codes, refer to the "Operation Manual" on the SMC website.

#### A Auto-preset function (F4)

This function, when selected in the initial setting, calculates and stores the set value from the measured pressure. For example, if this function is used for suction verification, the optimum set value is determined automatically by performing suction and release of several workpieces.

#### **Suction Verification**

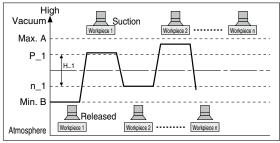


\* When using with IO-Link, the set values cannot be changed by communication.

#### Formula for Obtaining the Set Value

P_1 or n_1	H_1
P_1=A-(A-B)/4 n_1=B+(A-B)/4	H_1= (A-B)/2

#### **B** Display value fine adjustment function (F6)

Fine adjustment of the indicated value of the pressure sensor can be made within the range of  $\pm 5\%$  of the read value. (This eliminates wide variations of the indicated value.)



- Indicated value at the time of shipment
- Adjustable range of display value fine adjustment function
- \* When the display value fine adjustment function is used, the set pressure value may change ±1 digit.

#### C Peak/Bottom value display

This function constantly detects and updates the maximum (minimum) pressure when the power is supplied, and allows to hold the maximum (minimum) pressure value.

The held value is maintained even if the power supply is cut.

When the s and v buttons are simultaneously pressed for 1 second or longer, while "holding", the held value will be reset.

#### D Key-lock function

This function prevents operation errors such as accidentally changing setting values.

#### Zero-clear function

This function clears and resets the zero value on the display of measured pressure.

The indicated value can be adjusted within  $\pm 7\%$  F.S. of the pressure at the time of shipment from the factory. (ZSE20 $\square$ F (for compound pressure):  $\pm 3.5\%$  F.S.)

#### **F** Error display function

When an error or abnormality arises, the location and contents are displayed.

Error name	Error code	Description	Action
Over current error	Er 1 Er 2	A load current of 80 mA or more is applied to the switch output.	Eliminate the cause of the over current by turning off the power supply and then turn it on again.
Residual pressure error	[r]	During zero-clear operation, pressure over $\pm 7\%$ F.S. ( $\pm 3.5\%$ F.S. for compound pressure) is present. Note that the mode is returned to measurement mode automatically 1 second later. The zero-clear range varies by $\pm 1\%$ F.S. due to variation between individual products.	Perform zero-clear operation again after restoring the applied pressure to an atmospheric pressure condition.
Applied		Supply pressure exceeds the maximum set pressure.	Reset applied pressure to a level
pressure error		Supply pressure is below the minimum set pressure.	within the set pressure range
System error	Er 0 Er 7 Er 8 Er 8	An internal data error has occurred.	Turn the power off and then on again. If the error cannot be solved, please contact SMC for investigation.
Copy error	Er 13	The copy function does not operate properly.	After clearing the error by pressing the and buttons simultaneously for a minimum of 1 second, check the wiring and the model, and then attempt to copy again.
IO-Link master version error	Er 15	The IO-Link version does not match that of the master.	Ensure that the master IO-Link version matches the device version.

# Function Details **ZSE20** (F)/ISE20

The  $F\Box$  in ( ) shows the function code number. For details about operation procedures and function codes, refer to the "Operation Manual" on the SMC website.

#### **Function Details**


#### G Anti-chattering function (Simple setting mode or F1, F2)

A large bore cylinder or ejector consumes a large volume of air during operation and may experience a temporary drop in the supply pressure. This function prevents detection of such temporary drops in the supply pressure as an error by changing the delay time setting.

Available delay time settings
1.5 ms or less, 20 ms, 100 ms, 500 ms, 1000 ms, 2000 ms, 5000 ms

#### <Principle>

This function averages pressure values measured during the response time set by the user and then compares the average pressure value with the pressure set point value to output the result on the switch.

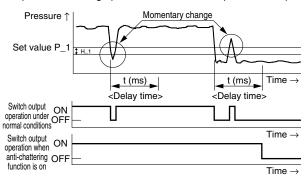

### H Units selection function (F0)

Display units can be switched with this function.

Display unit	MPA	kPA	kGF	bAr	PSi	inCH	mmHG
Smallest settable increment	MPa*1	kPa	kgf/cm <sup>2</sup>	bar	psi	inHg	mmHg
ZSE20□ (Vacuum pressure)	0.001	0.1	0.001	0.001	0.01	0.1	1
ZSE20□F (Compound pressure)	0.001	0.1	0.001	0.001	0.02	0.1	1
ISE20□ (Positive pressure)	0.001	1	0.01	0.01	0.1		
ISE20□H (Positive pressure)	0.001	1	0.01	0.01	0.2		

<sup>\*1</sup> The ZSE20□ (vacuum pressure) and ZSE20□F (compound pressure) will have different setting and display resolution when the unit is set to MPa.

# Selection of power saving mode (F80)

The power saving mode can be selected.

With this function, if no buttons are pressed for 30 s, it shifts to power saving mode.

At the time of shipment from the factory, the product is set to the normal mode (the power saving mode is turned off).

(During power saving mode, [ECo] will flash in the sub screen and the operation light will be ON (only when the switch is ON).)

### J Setting of security code (F81)

The user can select whether a security code must be entered to release the key lock.

At the time of shipment from the factory, it is set such that a security code is not required.

# ZSE20□(F)/ISE20□ Series

### **Function Details**

The  $F\square$  in ( ) shows the function code number. For details about operation procedures and function codes, refer to the "Operation Manual" on the SMC website.

### K Copy function (F97) (Z/ISE20A, 20B, 20C series only)

The set values of the sensor can be copied.


This can reduce setting labor and minimize the risk of setting mistakes.

The set value can be copied to up to 10 switches simultaneously.

(Maximum transmission distance: 4 m)



\* This function is not provided with the IO-Link compatible type.

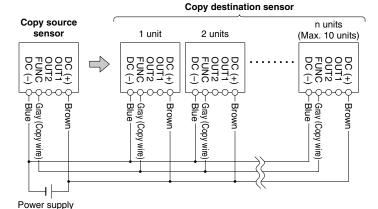


- 1) Wire as shown in the figure on the left.
- All sensors are set to copy destination when first purchased. (Default condition is the sensor to be copied to.)
- 3) Press the **Solution** on the source sensor to start copying.

### L Auto-shift function (F5) (Z/ISE20A, 20B, 20C series only)

When there are large fluctuations in the supply pressure, the switch may fail to operate correctly. The auto-shift function compensates for such supply pressure fluctuations. It measures the pressure at the time of auto-shift signal input and uses it as the reference pressure to correct the set value on the switch.

#### Set value correction by auto-shift function

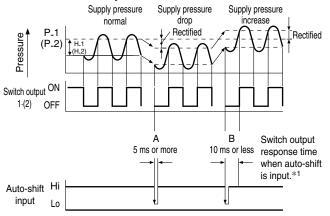

\*1 When delay time is 1.5 ms or less

When the auto-shift function is selected, " $\Re \Sigma_{\text{in}=0.00}$ " will be displayed on the sub screen for about 1 second, and the pressure value at that point will be saved as reference value " $\Gamma_-$ 5." Based on the saved reference value, output on-off points controlled by set values\*2 such as " $P_-$ 1," " $P_-$ 2," and " $P_-$ 2," will also be rectified.

\*2 When an output is reversed, output on-off points displayed at "\_\_ !," " $_{-}$  !," " $_{-}$  !," "\_\_ ?," and " $_{+}$  . [" will be rectified.

The above is an example in hysteresis mode. On-off points are similarly rectified in window comparator mode. Outputs that enable the auto-shift function can be changed via the settings.

\* This function is not provided with the IO-Link compatible type.

#### **Settable Range for Auto-Shift Input**

	Set pressure range	Settable range
Compound pressure	-105.0 to 105.0 kPa	-210 to 210 kPa
Vacuum pressure	10.0 to -105.0 kPa	115.0 to -115.0 kPa
Positive pressure	-0.105 to 1.050 MPa	-1.155 to 1.155 MPa
Positive pressure*3	-0.105 to 2.100 MPa	-2.20 to 2.205 MPa

\*3 Z/ISE20C series only

#### Auto-shift zero

The basic function of auto-shift zero is the same as that of auto-shift. However, it corrects values on the display based on a pressure value of "",", which is set as the reference value when auto-shift function is selected.



Made to Order

# ZSE20□(F)/ISE20□ Series Made to Order




Please contact SMC for detailed dimensions, specifications, and delivery times.

# 1 Parts in Contact with Fluid: Stainless Steel 316L

20C

This pressure switch has better corrosion resistance because it uses stainless steel 316L for the parts in contact with fluid (pressure sensor and fitting).

**How to Order** 



# Specifications

Model	ZSE20C(F)	ISE20C					
Withstand pressure	500 kPa 1.5 MPa						
Applicable fluid	Liquids and gases that do not corrode stainless steel 316L						

Models other than those above have the same specifications as the standard product.


- \* Not applicable to the rated pressure -0.1 to 2 MPa specifications (ISE20CH)
- \* A restrictor (equivalent to -X510) is installed inside the fitting. (Piping specifications A2(L) and B2(L) are excluded.)

# 2 Restrictor-installed Fitting


20C

A restrictor is installed inside the fitting in order to reduce the effects of water collision with inertia force in the piping when adsorption is broken.

#### **How to Order**



Enter the standard product number. (p. 24)

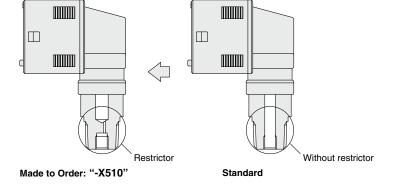

- \* Not applicable for piping specifications A2(L) and B2(L)
- \* There are cases in which this product will not effectively suppress of the effects of water hammer. It is advised that other measures be taken in such cases

# 3 Grease-free


20

20A

20B

This is a grease-free product.

\* The grease-free specification does not intentionally apply grease to the parts in contact with fluid.

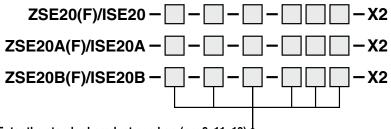

Enter the standard product number. (pp. 9, 11, 13)

 $\ast\,$  The ZSE20C(F) and the ISE20C(H) are grease-free specifications as standard.



# ZSE20□(F)/ISE20□ Series

Please contact SMC for detailed dimensions, specifications, and delivery times.

# 4 3 m Lead Wire

**20B** 


20C

This product features a lead wire which is 3 m in length.

Enter the standard product number. (pp. 13, 24)

# 5 M8 3-pin Pre-wired Connector (Lead wire length: 500 mm)

20B



Symbol	Description
Х	NPN 2 outputs (+ Copy function)
Υ	PNP 2 outputs (+ Copy function)

\* As the product body is shipped with the copy function enabled, simply replace the standard product cable with this cable.

# 6 M12 4-pin Pre-wired Connector (Lead wire length: 100 mm)

20A

20B

20C

ZSE20C(F)/ISE20C - X - - W - W - X505

Output specification


Symbol	Description
Х	NPN 2 outputs (+ Copy function)
Υ	PNP 2 outputs (+ Copy function)

\* As the product body is shipped with the copy function enabled, simply replace the standard product cable with this cable.


Pin no.	Pin name	Lead wire color
1	DC (-)	Blue
2	Function	Gray
3	OUT (2)	White
4	OUT (1)	Black
5	DC (+)	Brown


Nothing is connected to "Function." If you intend to make a connection to "Function," please contact SMC.

### Optional lead wire part number: ZS-46-5FM12

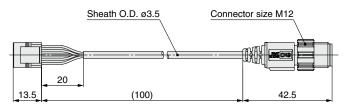

**♦** Enter the standard product number. (pp. 11, 13, 24)






# 7 Lead Wire with Connector (Terminal cover)

20

20A

By using a waterproof lead wire for the connector portion, terminal exposure can be prevented.



Enter the standard product number. (pp. 9, 11)

# Made to Order ZSE20 (F)/ISE20 Series


Please contact SMC for detailed dimensions, specifications, and delivery times.

# 8 Conversion Cable for the Z/ISE30A Lead Wire with Connector

20

20A

The conversion cable allows for connection between the existing Z/ISE30A lead wire with connector and the Z/ISE20.

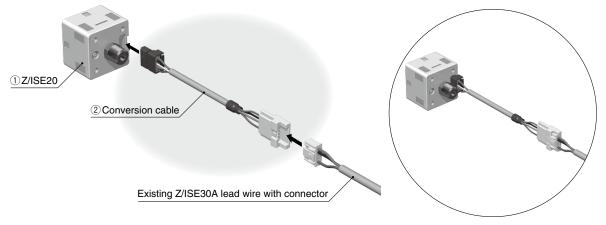


The output specification symbol may vary from that of the existing pressure switch.

#### $Z/ISE30A \rightarrow Z/ISE20 + Conversion Cable Correspondence Table$


Existing digital pressure switch model	Output specification	①Pressure switch part no.	②Conversion cable part no.
Z/ISE30A-□-N-□□□□ NPN open collector 1 output		Z/ISE20- <b>N</b> -□-□-□□□	
Z/ISE30A-□- <b>P</b> -□□□□	PNP open collector 1 output	Z/ISE20- <b>P</b> -□-□-□□	ZS-46-5L <b>A</b> -X424*1
Z/ISE30A-□- <b>A</b> -□□□□ NPN open collector 2 outputs		Z/ISE20A- <b>X</b> -□-□-□□□	25-40-3L <b>A</b> -X424
Z/ISE30A-□- <b>B</b> -□□□□	PNP open collector 2 outputs	Z/ISE20A- <b>Y</b> -□-□-□□□	
Z/ISE30A-□- <b>C</b> -□□□□	OA-□-C-□□□□ NPN open collector 1 output + Analog voltage output		
Z/ISE30A- <b>D</b> -□□□□ NPN open collector 1 output + Analog current output		Z/ISE20A- <b>S</b> -□-□-□□□	ZS-46-5L <b>B</b> -X424*1
Z/ISE30A-E-□□□□ PNP open collector 1 output + Analog voltage output  Z/ISE30A-F-□□□□ PNP open collector 1 output + Analog current output		Z/ISE20A- <b>T</b> -□-□-□□□	23-40-3L <b>B</b> -X424
		Z/ISE20A- <b>V</b> -□-□-□□□	

<sup>\*1</sup> While this conversion cable allows for use of the existing wiring, output and functions other than that of the Z/ISE30A will be invalid (not wired).

#### ZS-46-5LA-X424

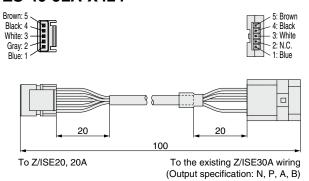



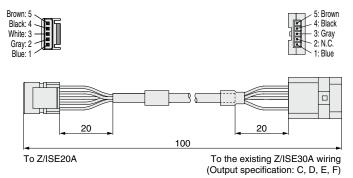

20

# 9 With Spacer for Fitting Extension


tting


20A

23.7

20B


Allows for the easier insertion and removal of the lead wire with connector by extending the piping fitting Part number for the spacer for extension: P3311276A






•	Piping	g specification
П	0	D

	<u> </u>
Symbol	Description
01	R1/8
N01	NPT1/8




# ZSE20□(F)/ISE20□ Series

Please contact SMC for detailed dimensions, specifications, and delivery times.




This specification includes a panel mount adapter for the mounting holes of the panel mount used by the Z/ISE40A and Z/ISE80.

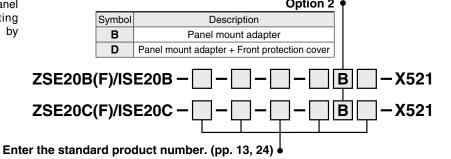


# Compatible with the panel holes of the Z/ISE40A




Panel mount adapter (Part no.: ZS-46-F)















Panel mount adapter + Front protection cover (Part no.: ZS-46-G)










### **Panel fitting dimensions**

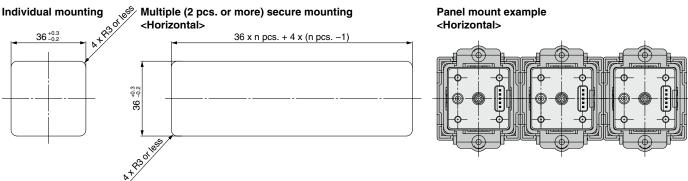

Made to

# Made to Order $ZSE20\square(F)/ISE20\square$ Series

Please contact SMC for detailed dimensions, specifications, and delivery times.

# 10 □36 mm Panel Hole (Compatible with the panel holes of the Z/ISE40A and Z/ISE80)


20B


20C


# Compatible with the panel holes of the Z/ISE80




Panel mount adapter (Rear ported) (Part no.: ZS-46-F)















Panel mount adapter + Front protection cover (Rear ported) (Part no.: ZS-46-G)











#### Panel fitting dimensions (Rear ported)

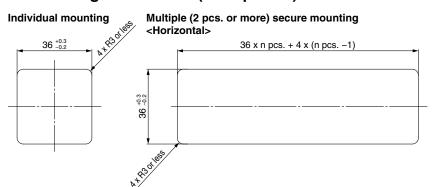

**SMC** 

Panel mount example <Horizontal>

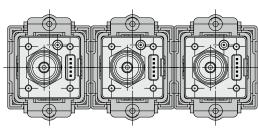

# **⚠** Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of "Caution," "Warning" or "Danger." They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)\*1), and other safety regulations.

Caution: Caution indicates a hazard with a low level of risk which, If not avoided, could result in minor or moderate injury.

★ Warning: Warning indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

⚠ Danger: Danger if not avoided, will result in death or serious injury. **Danger** indicates a hazard with a high level of risk which, \*1) ISO 4414: Pneumatic fluid power - General rules relating to systems.

ISO 4413: Hydraulic fluid power – General rules relating to systems.

IEC 60204-1: Safety of machinery - Electrical equipment of machines. (Part 1: General requirements)

ISO 10218-1: Manipulating industrial robots - Safety.

# **⚠** Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery/ equipment until safety is confirmed.

- 1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
- 2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
- 3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.
- 4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.
  - 1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
  - 2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
  - 3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
  - 4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

### **⚠** Caution

1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.

If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary. If anything is unclear, contact your nearest sales branch.

### Limited warranty and Disclaimer/ **Compliance Requirements**

The product used is subject to the following "Limited warranty and Disclaimer" and "Compliance Requirements".

Read and accept them before using the product.

#### **Limited warranty and Disclaimer**

- 1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.\*2)
  - Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
- 2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
- 3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.
  - 2) Vacuum pads are excluded from this 1 year warranty.

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.

Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

#### Compliance Requirements

- 1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
- 2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

### **⚠** Caution

#### SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

#### **Revision History**

- Edition B \* New variations (for general fluids, IP65, 2 outputs, and analog output) have been added.
  - \* Number of pages has been increased from 16 to 36.

Edition C \* The IO-Link compatible type has been added.

\* Number of pages has been increased from 36 to 40.

VX WR

- Edition D \* Made to order options have been added.
  - \* A One-touch fitting type has been added to the piping specifications.
  - \* Number of pages has been increased from 40 to 44.

Safety Instructions Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.

# **IO-Link Compatible**


# For General Fluids



# 3-Screen Display High-Precision Digital Pressure Switch

Stainless diaphragm Oil-free (Single-layer diaphragm structure)
Sensor unit: Stainless steel 630 Fitting parts: Stainless steel 304

■ Visualization of operation/equipment status/Remote monitoring and control by communication

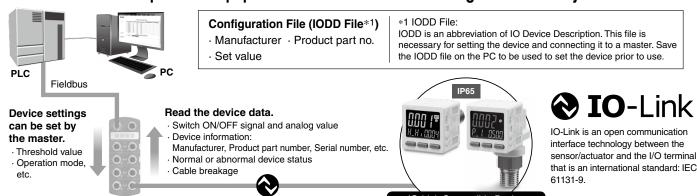

### Implement diagnostic bits in the process data.

The diagnostic bit in the cyclic process data makes it easy to find problems with the equipment.

It is possible to find problems with the equipment in real time using the cyclic (periodic) data and to monitor such problems in detail with the noncyclic (aperiodic) data.

#### **Process Data**

Bit offset	Item	Note
0	OUT1 output	0: OFF 1: ON
1	OUT2 output	0: OFF 1: ON
2	Diagnosis	0: Normal 1: Abnormal
3 to 15	Measured pressure value	Unsigned 13 bit

### Diagnosis items

- · Internal product malfunction
- · Outside of zero-clear range
- · Outside of rated pressure range
- Upper temperature limit exceeded inside the product

Bit offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Item					Mea	asured	press	sure v	alue					Diagnosis	OUT2	OUT1

ZSE20C(F)-L/ISE20C(H)-L

### **Display function**

Displays the output communication status and indicates the presence of communication data









#### Operation and Display

Communication with master		ık status ıtor light		Status		Screen display *3	Description	
		<b>*</b> 2		_	Operate	MadE oPE	Normal communication status (readout of measured value)	
		Flashing)		Normal	Start up	ModE Strt	At the start of communication	
	00000			_	Preoperate	ModE PrE	At the start of communication	
Yes	COM*1		IO-Link mode	ormal	Version does not match	Er 15	The IO-Link version does not match that of the master.  The master uses version 1.0.  * The applicable IO-Link version is 1.1.	
					Lock	ModE LoC	Backup and restore required due to data storage lock	
No	OFF		Abnor		Communication disconnection	MadE oPE MadE SErE MadE PrE	Normal communication was not received for 1 s or longer.	
		OFF SIO mode	ModE 5 io	General switch output				

<sup>\*1</sup> The COM indicator is ON when communication with the master is established. \*2 In IO-Link mode, the IO-Link indicator will be ON or flashing. \*3 When the sub screen is set to Mode


# IO-Link Compatible (1 Output)

For General Fluids

3-Screen Display High-Precision Digital Pressure Switch

# ZSE20C(F)-L/ISE20C(H)-L Series






ISE20C -0.1 to 1 MPa ISE20CH -0.1 to 2 MPa

For Positive Pressure

For Vacuum/ **Compound Pressure** 

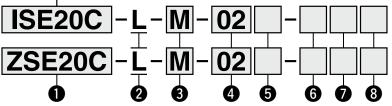

# Rated pressure range

	<u>.                                      </u>
ZSE20C	0 to -101 kPa
ZSE20CF	-100 to 100 kPa

Symbol	Symbol Description		
L	IO-Link/Switch: 1 output ← (PNP or NPN switching type for switch output)		

# 3 Unit specification

Symbol	Description
Nil	Units selection function*1
M	SI units only*2
Р	Units selection function (Initial value psi)*1

- \*1 Under the New Measurement Act, switches with the units selection function are no longer allowed for use in Japan.
- \*2 Fixed units: kPa, MPa


# 2 Output specification

Symbol	Description
L	IO-Link/Switch: 1 output ← (PNP or NPN switching type for switch output)

### 4 Piping specification

	Symbol	Description
	R1/4 (M5 female threaded)	
	N02	NPT1/4 (M5 female threaded)
	F02	G1/4 (M5 female threaded)
	C01	Rc1/8
A2 URJ1/4 (Face		URJ1/4 (Face seal fitting)
	B2	TSJ1/4 (Compression fitting)

# Piping direction



#### 6 Option 1

Symbol	Description
Nil	Without lead wire
W	Lead wire with connector, 5-core (2 m lead wire, With waterproof cover)  With waterproof cover

\* For the lead wire with M12 connector, refer to the Web Catalog.

# Options/Part Nos.

#### When only optional parts are required, order with the part numbers listed below.

Then only optional parts are required, order with the part hambers noted below.					
Description	Part no.	Note			
Bracket A	ZS-46-A1	For rear ported/Tapping screw: Nominal size 3 x 8 L (2 pcs.)			
Bracket C	ZS-46-E	For bottom ported/Tapping screw: Nominal size 3 x 10 L (2 pcs.)			
Danal mount adapter	ZS-46-B	Rear ported			
Panel mount adapter	ZS-35-B	Bottom ported			
Panel mount adapter +	ZS-46-D	Rear ported			
Front protection cover	ZS-35-E	Bottom ported			
Lead wire with connector	ZS-46-5F	5-core, 2 m, Waterproof (With waterproof cover			
Front protection cover	ZS-27-01	Rear ported			
From protection cover	ZS-35-01	Bottom ported			

# Option 2


\* Note that the optional parts that can be used vary depending on the piping direction.

	110
Symbol	Description
Nil	None

### Rear ported ( Piping direction: Nil)

Symbol	De	scription	Symbol		Description	
<b>A</b> 1	Bracket A	ZS-46-A1	В	Panel mount adapter		ZS-46-B
D	Panel mount adapter + Front protection cover					ZS-46-D

#### Bottom ported ( Piping direction: L)

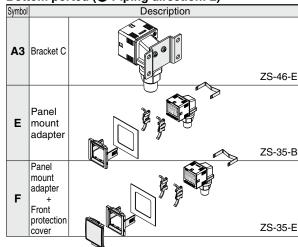

# Option 3

Symbol	Operation manual*3	Calibration certificate*3
Nil	0	_
Υ	_	_
K	0	0
Т	_	0

\*3 All texts are in both English and Japanese.

Specifications not listed are the same as those of the standard product. More information can be viewed here.





# For General Fluids Secreen Display High-Precision Digital Pressure Switch For General Fluids Secreen Display High-Precision Digital Pressure Switch For General Fluids Secreen Display High-Precision Digital Pressure Switch Secreen Display High-Precision Digital Pressure Switch Secreen Display High-Precision Digital Pressure Switch For General Fluids For General Fluids Secreen Display High-Precision Digital Pressure Switch For General Fluids For Ge

# **Specifications**

For pressure switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.



Model			ZSE20C-L (Vacuum pressure)	ZSE20CF-L (Compound pressure)	ISE20C-L (Positive pressure)	ISE20CH-L (Positive pressure)	
Applicable fluid	Applicable fluid			Liquids and gases that do not corrode stainless steel 630 and 304			
	Rated pressure range		0.0 to -101.0 kPa	-100.0 to 100.0 kPa	-0.100 to 1.000 MPa	-0.100 to 2.000 MPa	
D	Display/Set pressure range		10.0 to -105.0 kPa	-105.0 to 105.0 kPa	-0.105 to 1.050 MPa	-0.105 to 2.100 MPa	
Pressure	Display/Sn	nallest settable increment	0.1	0.1 kPa 0		MPa	
	Withstand	pressure	500	kPa	2 MPa	4 MPa	
	Power Supply (When not used as a switch output device supply (When not used as an IO-Link device)		12	to 24 VDC ±10% with 109	% voltage ripple (p-p) or	less	
Power supply	voltage	When used as an IO-Link device	18 to 30 VDC, including ripple (p-p) 10%				
	Current co	onsumption		35 mA	or less		
	Protection	ı		Polarity p	rotection		
	Display ac	curacy	=	-2% F.S. ±1 digit (Ambien	t temperature of 25 ±3°C	5)	
Accuracy	Repeatabi	lity		±0.2% F.9	S. ±1 digit		
•	Temperatu	ire characteristics		±3% F.S. (25	•		
	Output typ	)e		Select from NPN or PN	open collector output.		
	Output mo		Hysteresis	mode, Window compara	<u> </u>	Output OFF	
	Switch ope		,	Normal output, F			
	Max. load			80	<b>.</b>		
Switch output		ed voltage (NPN only)		28			
(SIO mode)		tage drop (Residual voltage)		1.5 V or less (at loa			
(SIO IIIOGE)	Delay time		1.5			ante	
	Hysteresis	Hysteresis mode	1.5 ms or less, variable from 0 to 60 s/0.01 s increments  Variable from 0*2				
		Window comparator mode					
	Short circuit protection		Yes				
	Unit*3		MPa, kPa, kgf/cm², bar, psi, inHg, mmHg MPa, kPa, kgf/cm², bar, psi				
	Display type		LCD				
	Number of screens		3-screen display (Main screen, Sub screen x 2)				
Display	Display color		1) Main screen: Red/Green 2) Sub screen: Orange				
	Number of display digits		Nain screen: 4 digits (7 segments)     Sub screen: 4 digits (Upper 1 digit 11 segments, 7 segments for other)				
	Indicator I	ight	Lights uլ	when switch output is to	rned ON (OUT1, OUT2:	Orange)	
Digital filter*4			Variable from 0 to 30 s/0.01 s increments				
	Enclosure		IP65				
Environ	Withstand voltage		250 VAC for 1 minute between terminals and housing				
Environmental resistance	Insulation	resistance	$2\mathrm{M}\Omega$ or more (50 VDC measured via megohmmeter) between terminals and housing				
resistance	Operating	temperature range	Operating: -5 to 50°C, Stored: -10 to 60°C (No condensation)				
	Operating	humidity range	Operating/Stored: 35 to 85% RH (No condensation)				
Standards				CE marking (EMC dire	ective/RoHS directive)		
Length of lead	wire with co	onnector		2	m		
-	IO-Link typ	ре	Device				
	IO-Link ve			V1			
		cation speed	COM2 (38.4 kbps)				
	Configurat		IODD file*5				
Communication			2.3 ms				
(IO-Link mode)	Process data length		Input data: 2 bytes, Output data: 0 bytes				
		et data communication	Yes				
			Yes				
	Data storage function  Event function		Yes				
	Vendor ID		131 (0 x 000083)				
	digital filter		131 (U X UUUU83)				

- \*1 Value without digital filter (at 0 ms)
- \*2 If the applied pressure fluctuates around the set value, the hysteresis must be set to a value greater than the amount of fluctuation, or chattering will occur.
- \*3 Setting is only possible for models with the units selection function. Only MPa or kPa is available for models without this function.
- \*4 The response time indicates when the set value is 90% in relation to the step input.
- \*5 The configuration file can be downloaded from the SMC website, https://www.smcworld.com
- \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

#### Piping Specifications and Weights

i ping opeometric and weights								
Model		02	N02	F02	C01	A2	B2	
Port size		R1/4	NPT1/4	G1/4	Rc1/8	URJ1/4	TSJ1/4	
Materials of parts in contact with fluid		Pressure sensor: Stainless steel 630, Fitting: Stainless steel 304						
	Body (Rear ported)	51 g	51 g	48 g	47 g	54 g	46 g	
Weight	Body (Bottom ported)	77 g	78 g	74 g	65 g	81 g	72 g	
	Lead wire with connector	+39 g						

### **Cable Specifications**

Conductor	cross section	0.15 mm² (AWG26)		
Inquilator	O.D.	1.0 mm		
insulator	Color	Brown, Blue, Black, White, Gray (5-core)		
Sheath	Finished O.D.	ø3.5		




# ZSE20C(F)-L/ISE20C(H)-L Series

### Set Pressure Range and Rated Pressure Range


#### Set the pressure within the rated pressure range.

The set pressure range is the range of pressure within which setting is possible. The rated pressure range is the range of pressure that satisfies the specifications (accuracy, linearity, etc.) of the switch. Although it is possible to set a value outside the rated pressure range, the specifications cannot be guaranteed even if the value stays within the set pressure range.

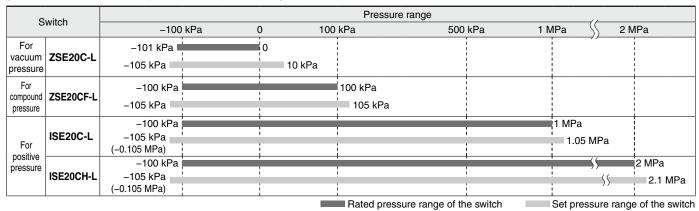


### **IO-Link: Process Data**

#### Relationship between the process data and pressure value

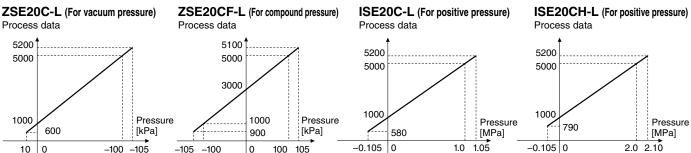


### **Internal Circuits and Wiring Examples**



#### -L: (IO-Link/Switch: 1 output)

### When used as a switch output device (When not used as an IO-Link device = When in SIO mode)

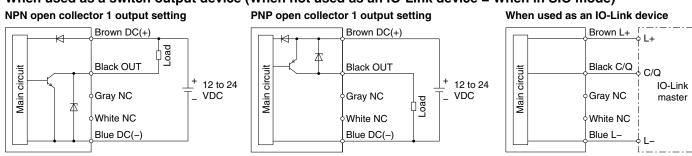

A Safety Instructions Be sure to read the "Handling Precautions for SMC Products" (M-E03-3) and "Operation Manual" before use.

# **SMC** Corporation

Akihabara UDX 15F

4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN

Phone: 03-5207-8249 Fax: 03-5298-5362

https://www.smcworld.com

© 2022 SMC Corporation All Rights Reserved