

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



HEAVYCON pin insert, for 830 V (III/3), with 10 N/O contacts and 2 switch contacts, crimp connection



## **Key Commercial Data**

Packing unit	1 pc
GTIN	4 055626 063522
GTIN	4055626063522
Weight per Piece (excluding packing)	58.600 g
Custom tariff number	85366990
Country of origin	China

## Technical data

#### General

Note	For HEAVYCON-ADVANCE housing of B24 type and HEAVYCON housing of HV10 type, crimp contacts CK 2,5-ED (crimp contacts not included in scope of supply)
	Connectors may be operated only when there is no load/voltage.
Connection method	Crimp connection
Torque	0.8 Nm 1.2 Nm (PE connection)
	0.5 Nm 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)
Number of connections per position	1
Degree of pollution	3
Overvoltage category	III
Number of positions	10+2+PE
No. of power contacts	10
No. of control contacts	2
Insertion/withdrawal cycles	≥ 500



## Technical data

## General

Size	B24
	B48
Conductor cross section	0.5 mm <sup>2</sup> 4 mm <sup>2</sup> (power contacts)
	0.5 mm² 4 mm² (control contacts)
Connection cross section AWG	20 12 (power contacts)
	20 12 (control contacts)
Stripping length of the individual wire	7.5 mm (Power contact)
	7.5 mm (control contact)
Assembly instructions	To ensure correct use, installation in housing with IP54 protection or better is required

#### Ambient conditions

Ambient temperature (operation)	-40 °C 125 °C (including heating up of contacts)
---------------------------------	--

#### Material data

Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PA
Standards/regulations	PA: Fire protection in rail vehicles - requirement sets R22 and R23 acc. to DIN EN 45545-2 (Risk level HL1 - HL2)
	PA: Fire protection in rail vehicles - requirement set R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

#### Electrical characteristics

Rated voltage (III/3)	830 V (power contacts)
	500 V (control contacts)
Rated surge voltage	8 kV (power contacts)
	6 kV (control contacts)
Rated current	16 A (power contacts)
	16 A (control contacts)

## Standards and Regulations

Flammability rating according to UL 94	V0
Standards/regulations	acc. to DIN EN 45545-2

## **Environmental Product Compliance**

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# Drawings



Diagram


40
35
30
25
20
15
10
= HC HV 03 CT
= HC HV 06 CT
= HC HV 10 CT
0 10 20 30 40 50 60 70 80 90 100 110 120 130

T [°C]

Dimensional drawing

#### Derating diagram


# 110,3



Dimensional drawing



## Dimensional drawing

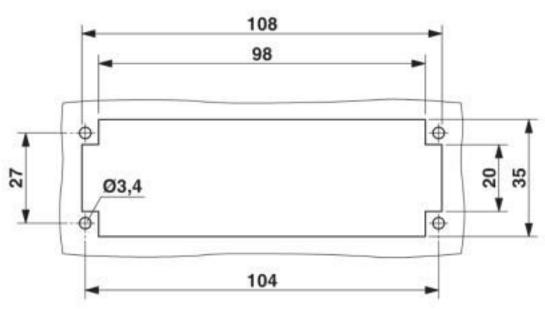

Mounting cutout when used without housing

## Classifications

## eCl@ss

eCl@ss 10.0.1	27440205
eCl@ss 5.1	27261200
eCl@ss 6.0	27261200
eCl@ss 7.0	27440205
eCl@ss 8.0	27440205
eCl@ss 9.0	27440205

## **ETIM**

ETIM 5.0	EC000438
ETIM 6.0	EC000438
ETIM 7.0	EC000438

#### **UNSPSC**

UNSPSC 13.2	39121522
UNSPSC 18.0	39121522
UNSPSC 19.0	39121522
UNSPSC 20.0	39121522
UNSPSC 21.0	39121522

# Approvals

## Approvals



# **Approvals**

Approvals

UL Recognized / EAC / DNV GL / EAC

Ex Approvals

## Approval details

UL Recognized	http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E118976	
Nominal voltage UN	600 V	
Nominal current IN	16 A	
mm²/AWG/kcmil	12	

EAC	ERC	RU C- DE.Al30.B.01102
-----	-----	--------------------------

DNV GL	CAMPAGE AND MAKETON	https://approvalfinder.dnvgl.com/	TAE000037S
--------	---------------------	-----------------------------------	------------

EAC	ERC	RU C- DE.BL08.B.00511
	LIIL	DE.BE00.B.00311

#### Accessories

Accessories

Coding element

Coding element - HC-CST - 1676857



Coding peg for coding up to 16 connectors



#### Accessories

Coding element - HC-CBU - 1676860



Coding socket for coding up to 16 connectors

Coding bolt - HC-CB - 1772722



Coding pin, prevents mismating of up to six connectors with an identical number of positions

#### Crimp contact

Crimp contact - CK2,5-ED-0,50ST AG - 1663572



Turned 2.5 crimp contact, individual male contact, core diameter 0.5 mm², silver-plated

Crimp contact - CK2,5-ED-0,75ST AG - 1663585



Turned 2.5 crimp contact, individual male contact, core diameter 0.75 mm², silver-plated

Crimp contact - CK2,5-ED-1,00ST AG - 1663598



Turned 2.5 crimp contact, individual male contact, core diameter 0.75 to 1.00 mm², silver-plated



#### Accessories

Crimp contact - CK2,5-ED-1,50ST AG - 1663608



Turned 2.5 crimp contact, individual male contact, core diameter 1.5 mm², silver-plated

Crimp contact - CK2,5-ED-2,50ST AG - 1663611



Turned 2.5 crimp contact, individual male contact, core diameter 2.5 mm², silver-plated

Crimp contact - CK2,5-ED-3,00ST AG - 1663624



Turned 2.5 crimp contact, individual male contact, core diameter 3.00 mm², silver-plated

Crimp contact - CK2,5-ED-4,00ST AG - 1663637



Turned 2.5 crimp contact, individual male contact, core diameter 4.00 mm², silver-plated

Crimp contact - CK2,5-ED-0,50ST AU - 1674804



Turned 2.5 crimp contact, individual male contact, core diameter 0.5 mm², gold-plated



#### Accessories

Crimp contact - CK2,5-ED-1,00ST AU - 1674781



Turned 2.5 crimp contact, individual male contact, core diameter 0.75 to 1.0 mm², gold-plated

Crimp contact - CK2,5-ED-1,50ST AU - 1674778



Turned 2.5 crimp contact, individual male contact, core diameter 1.5 mm², gold-plated

Crimp contact - CK2,5-ED-2,50ST AU - 1674817



Turned 2.5 crimp contact, individual male contact, core diameter 2.5 mm², gold-plated

Crimp contact - CK2,5-ED-4,00ST AU - 1674794



Turned 2.5 crimp contact, individual male contact, core diameter 4.00 mm², gold-plated

## Additional products

Contact insert - HC-HV10-I-CT-F - 1405265



HEAVYCON socket insert, for 830 V (III/3), with 10 N/O contacts and 2 switch contacts, crimp connection

Phoenix Contact 2020 @ - all rights reserved http://www.phoenixcontact.com