3VA1325-5MH32-0AA0

## **Data sheet**



circuit breaker 3VA1 IEC frame 400 breaking capacity class M Icu=55kA @ 415V 3-pole, starter protection TM120M, AM, In=250A without overload protection short-circuit protection Ii=8...16 x In nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Starter protection
design of the overcurrent release	TM120M
protection function of the overcurrent release	I
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	30 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	10 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	6 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	4 200
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
<ul> <li>communication function</li> </ul>	No
<ul> <li>other measurement function</li> </ul>	No
Net Weight	4.93 kg
Current	
operational current	
• at 40 °C	250 A
• at 45 °C	250 A
• at 50 °C	250 A
• at 55 °C	245 A
• at 60 °C	239 A
• at 65 °C	234 A
• at 70 °C	228 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	M
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	85 kA
• at 415 V	55 kA
• at 440 V	55 kA
• at 500 V	36 kA
• at 690 V	7 kA
operating short-circuit current breaking capacity (Ics)	

• at 240 V	85 kA
● at 415 V	55 kA
• at 440 V	55 kA
• at 500 V	36 kA
• at 690 V	5 kA
short-circuit current making capacity (Icm)	
• at 240 V	187 kA
• at 415 V	121 kA
• at 440 V	121 kA
● at 500 V	75.6 kA
• at 690 V	11.9 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Adjustable parameters	
adjustable response value setting current (li) / for I-tripping	
• minimum	2 000 A
• maximum	4 000 A
adjustable setting current (InN) / for N-tripping	
• minimum	250 A
maximum	250 A
product function / grounding protection	No
Mechanical Design	
product component	
undervoltage release	No
voltage trigger	No
trip indicator	No
height [in]	9.76 in
height	248 mm
width [in]	5.43 in
width	138 mm
	4.33 in
depth [in] depth	4.33 III
·	110 111111
Connections	5 W 1 1
arrangement of electrical connectors / for main current circuit	Front terminal
type of electrical connection / for main current circuit	nut keeper kit on both ends
type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	20 x 1 mm
type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	35 x 10 mm
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	Silver
design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) $$	Silver
Auxiliary circuit	
number of CO contacts / for auxiliary contacts	0
Accessories	
product extension / optional / motor drive	Yes
Environmental conditions	
protection class IP / on the front	IP40
ambient temperature	
<ul><li>during operation / minimum</li></ul>	-25 °C
during operation / maximum	70 °C
during storage / minimum	-40 °C
during storage / maximum	80 °C
reference code / according to IEC 81346-2	Q
Approvals / Certificates	
General Product Approval	EMC
General Froduct Approval	EWIC



Confirmation



**Miscellaneous** 





**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping





Miscellaneous

Special Test Certificate





Marine / Shipping

other

Environment





Confirmation

**Miscellaneous** 

**Miscellaneous** 

Environmental Confirmations

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1325-5MH32-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA1325-5MH32-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VA1325-5MH32-0AA0


**CAx-Online-Generator** 


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications









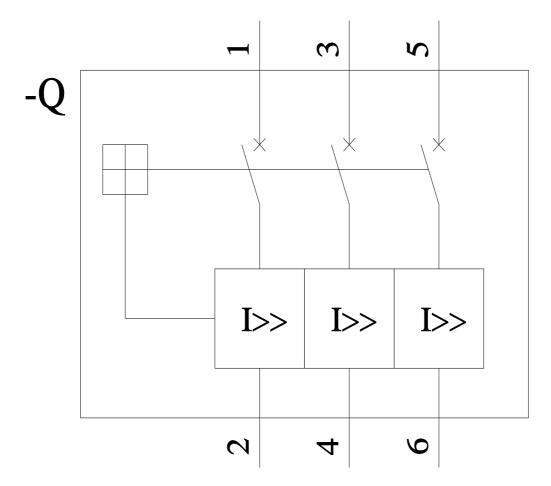

last modified: 10/22/2022 🖸

