


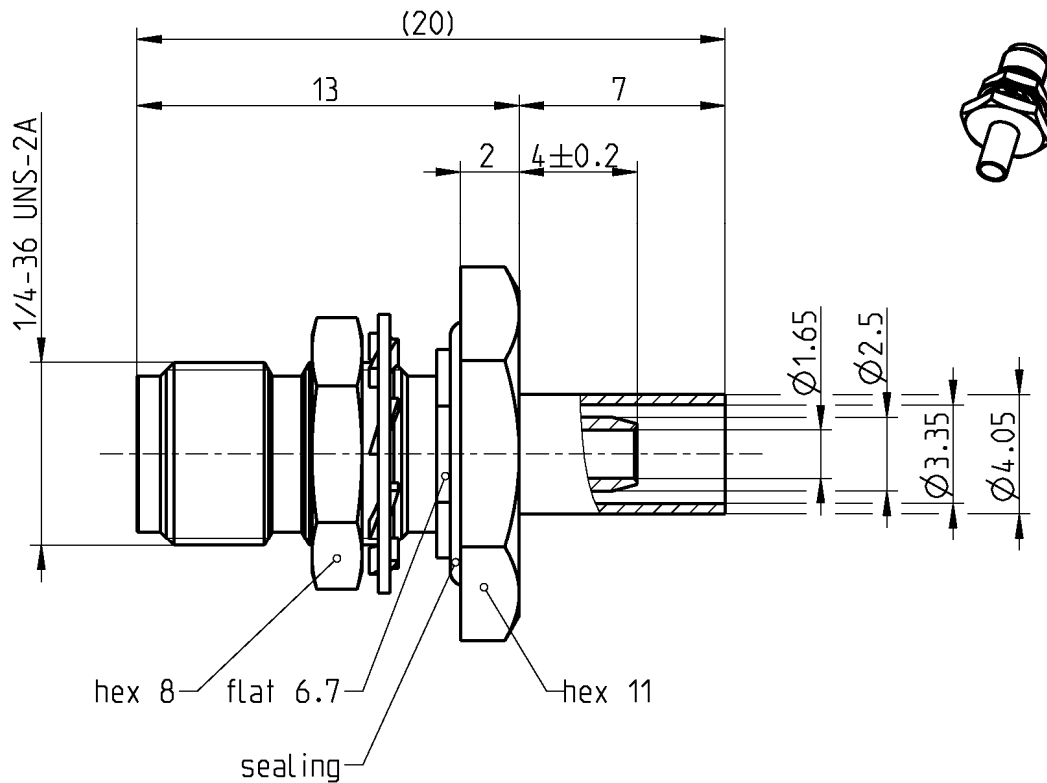

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to IEC 60169-15; EN 122110; MIL-STD-348A, Fig. 310

Documents

Assembly instruction 32 B21
Panel piercing B 57

Material and plating

Connector parts

Center contact
Outer contact
Dielectric
Crimping ferrule

Material

Beryllium copper
Beryllium copper or equivalent
PTFE
Copper

Plating

AuroDur, gold plated
AuroDur, gold plated

Gold, min. 0.15 μm , over chemical nickel

Electrical data

Impedance	50 Ω
Frequency	DC to 12.4 GHz
VSWR	$\leq 1.05 + 0.01 \times f$ [GHz], DC to 5 GHz
Insertion loss	$\leq 0.03 \times \sqrt{f(\text{GHz})}$ dB, DC to 5 GHz
Insulation resistance	$\geq 5 \times 10^3$ M Ω
Center contact resistance	≤ 3 m Ω
Outer contact resistance	≤ 2 m Ω
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	≤ 200 W @ 2 GHz
RF-leakage	≥ 100 dB up to 1 GHz

- Limitations are possible due to the used cable type -

Mechanical data

Mating cycles	min. 500
Center contact captivation: axial	≥ 27 N
Coupling test torque	max. 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

Environmental data

Temperature range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Tooling

Crimping tool	11W150-000
Crimp insert	11W150-102

Suitable cables

TZC 502 2101, RG 316 /U-d, K 02252 D

Weight

Weight	4,00 g/pce
--------	------------

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Rong Fang	15/03/04	Sa. Krautenbacher	14.03.14	f00	14-0352	T. Krojer	14.03.14

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0
Fax: +49 8684 18-499
email: info@rosenberger.de

Page
2 / 2