

# Product data sheet

## Automation technology - Data transmission




Product description	<b>M12 Female panel mount connector, Contacts: 8, shieldable, THT, IP67, UL, M16x1.5, Rear mounting</b>
Area	<b>M12-X</b>
Coding	<b>X-coded</b>
Series	<b>876</b>
Part no.	<b>09 3782 91 08</b>


### Illustration




### Conductor layout

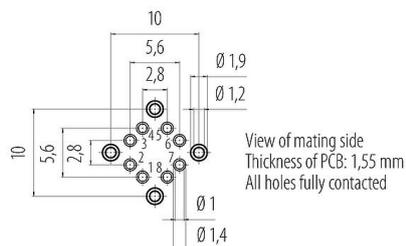

### Scale drawing



### Contact arrangement (Plug-in side)



You can find the assembly instructions on the next page.

### Technical data

#### General features

Part no.	<b>09 3782 91 08</b>
Connector design	Female panel mount connector
Type standard	DIN EN 61076-2-109
Coding	X-coded
Version	Connector socket straight
Connector locking system	screw
Termination	THT
Degree of protection	IP67
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	14.52
Customs tariff number	85369010

# Product data sheet

## Automation technology - Data transmission



Product description	<b>M12 Female panel mount connector, Contacts: 8, shieldable, THT, IP67, UL, M16x1.5, Rear mounting</b>
Area	<b>M12-X</b>
Coding	<b>X-coded</b>
Series	<b>876</b>
Part no.	<b>09 3782 91 08</b>

Country of Origin	DE
-------------------	----

### Electrical parameters

Rated voltage	50 V (AC) / 60 V (DC)
Rated current	0.5 A
Insulation resistance	$> 10^8 \Omega$
Pollution degree	3
Transmission rate	CAT 6A
Overvoltage category	II
Insulating material group	III
EMC compliance	shieldable
Shield connection	Shield pin

### Material

Housing material	Zinc die-cast nickel-plated
Contact body material	PA
Contact material	CuSn (bronze)
Contact plating	Au (gold)
Locking material	CuZn (brass)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	9801c53c-21f9-4133-b458-fb4f56b996bc

### Authorization/approvals

Approvals	UL
Norms and regulations	DIN EN 61373 DIN EN 45545-2 (according to requirement set R26 (HL1 - HL3))

### Classifications

eCl@ss 11.1	27-44-01-09
ETIM 9.0	EC003569

# Product data sheet

## Automation technology - Data transmission





Product description **M12 Female panel mount connector, Contacts: 8, shieldable, THT, IP67, UL, M16x1.5, Rear mounting**

Area **M12-X**  
 Coding **X-coded**  
 Series **876**  
 Part no. **09 3782 91 08**

### Assembly instructions


hexagonal nut

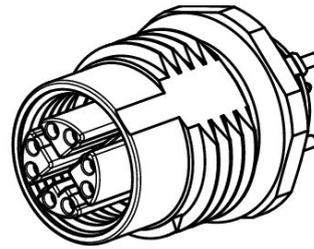


female panel mount connector

### Assembly instructions / Panel cut-out

With flats as anti-rotation device

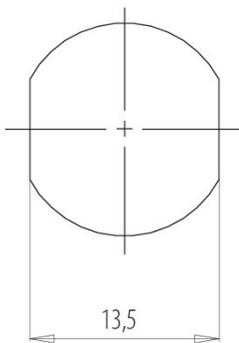

With bore hole

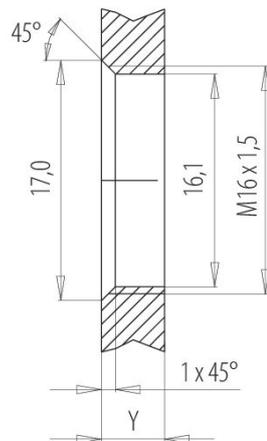

Installation direction:  
o-ring sits on chamfer.

### Tightening moment

Metall housing/Plastic housing 1,25 Nm

Thickness of wall <b>Y</b> (mm)		
Version	min (mm)	max (mm)
Fastened from rear	2	3,5
Front fastened	2	4,5
positioning possible <sup>1)</sup>	2	3,5
Screw clamp	2	3,5
Thread M12 x 1	2	3,0
Thread M14 x 1 <sup>2)</sup>	<sup>3)</sup> 1,5/ <sup>4)</sup> 2	6,5

### Notes

- <sup>1)</sup> Do not attach a chamfer
- <sup>2)</sup> Wall thickness:  
use nut 38 5385 100 001 up to 1,5 mm,  
>1,5 mm cut thread
- <sup>3)</sup> Nut
- <sup>4)</sup> Thread in wall of housing

# Product data sheet

## Automation technology - Data transmission



Product description	<b>M12 Female panel mount connector, Contacts: 8, shieldable, THT, IP67, UL, M16x1.5, Rear mounting</b>
Area	<b>M12-X</b>
Coding	<b>X-coded</b>
Series	<b>876</b>
Part no.	<b>09 3782 91 08</b>

### General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).