


Product availability: Stock - Normally stocked in distribution facility

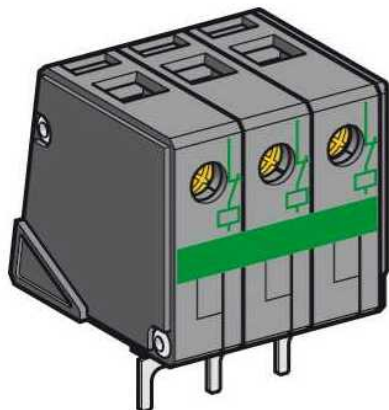

### Main

Commercial Status	Commercialised
Range of product	TeSys GV2
Product or component type	Limiters
Accessory / separate part category	Protection accessory

### Complementary

Mounting support	On circuit breaker
[I <sub>th</sub> ] conventional free air thermal current	63 A
Activation threshold	1500 A
[U <sub>i</sub> ] rated insulation voltage	690 V conforming to IEC 60947-1
Connections - terminals	Screw clamp terminals 2 cable(s) 0...0.01 in <sup>2</sup> (1.5...4 mm <sup>2</sup> ) - cable stiffness : flexible - with cable end Screw clamp terminals 2 cable(s) 0...0.02 in <sup>2</sup> (2.5...10 mm <sup>2</sup> ) - cable stiffness : flexible - without cable end Screw clamp terminals 2 cable(s) 0...0.02 in <sup>2</sup> (1.5...10 mm <sup>2</sup> ) - cable stiffness : solid Screw clamp terminals 1 cable(s) 0...0.04 in <sup>2</sup> (1.5...25 mm <sup>2</sup> ) - cable stiffness : solid Screw clamp terminals 1 cable(s) 0...0.04 in <sup>2</sup> (1.5...25 mm <sup>2</sup> ) - cable stiffness : flexible - without cable end Screw clamp terminals 1 cable(s) 0...0.02 in <sup>2</sup> (1.5...16 mm <sup>2</sup> ) - cable stiffness : flexible - with cable end
Tightening torque	19.47 lbf.in (2.2 N.m)
Product weight	0.29 lb(US) (0.13 kg)

### Ordering and shipping details

Category	22366 - MAN STR PROTECTORS-GV1/GV3
Discount Schedule	I11
GTIN	00785901209959
Nbr. of units in pkg.	1
Package weight(Lbs)	0.27
Product availability	Stock - Normally stocked in distribution facility
Returnability	Y
Country of origin	FR

### Contractual warranty

Period	18 months
--------	-----------

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.