

# servo motor BMH - 3.4 Nm - 8000 rpm - keyed shaft - without brake - IP54

BMH0703T17A2A

! Discontinued on: 9 Feb 2023

① Discontinued

EAN Code: 3606485195339

#### Main

Device short name	вмн
Product or component type	Servo motor
Maximum mechanical speed	8000 rpm
Continuous stall torque	3.4 N.m for LXM32.D30M2 at 10 A, 115 V, single phase 3.4 N.m for LXM32.D18M2 at 6 A, 230 V, single phase
Peak stall torque	8.7 N.m for LXM32.D30M2 at 10 A, 115 V, single phase 10.2 N.m for LXM32.D18M2 at 6 A, 230 V, single phase
Nominal output power	650 W for LXM32.D30M2 at 10 A, 115 V, single phase 900 W for LXM32.D18M2 at 6 A, 230 V, single phase
Nominal torque	3.1 N.m for LXM32.D30M2 at 10 A, 115 V, single phase 2.9 N.m for LXM32.D18M2 at 6 A, 230 V, single phase
Nominal speed	2000 rpm for LXM32.D30M2 at 10 A, 115 V, single phase 3000 rpm for LXM32.D18M2 at 6 A, 230 V, single phase
Product compatibility	LXM32.D30M2 at 115 V single phase LXM32.D18M2 at 230 V single phase
Shaft end	Keyed
IP degree of protection	IP54 standard
Speed feedback resolution	32768 points/turn x 4096 turns
Holding brake	Without
Mounting support	International standard flange
Electrical connection	Rotatable right-angled connectors

## Complementary

Range compatibility	Lexium 32
[Us] rated supply voltage	240 V
Network number of phases	Three phase
Continuous stall current	5.55 A
Continuous power	1.68 W
Maximum current Irms	17.84 A for LXM32.D30M2 17.8 A for LXM32.D18M2
Maximum permanent current	17.84 A
Second shaft	Without second shaft end
Shaft diameter	14 mm
Shaft length	30 mm

key width	20 mm
Feedback type	Multiturn SinCos Hiperface
Motor flange size	70 mm
Number of motor stacks	3
Torque constant	0.61 N.m/A at 120 °C
Back emf constant	39.3 V/krpm at 120 °C
Number of motor poles	5.0
Rotor inertia	1.67 kg.cm²
Stator resistance	1.32 Ohm at 20 °C
Stator inductance	2.07 mH at 20 °C
Stator electrical time constant	3.3 ms at 20 °C
Maximum radial force Fr	730 N at 1000 rpm 580 N at 2000 rpm 510 N at 3000 rpm 460 N at 4000 rpm 430 N at 5000 rpm 400 N at 6000 rpm
Maximum axial force Fa	0.2 x Fr
type of cooling	Natural convection
Length	186 mm
Centring collar diameter	60 mm
centring collar depth	2.5 mm
Number of mounting holes	4
Mounting holes diameter	5.5 mm
Circle diameter of the mounting holes	82 mm
Net weight	3 kg
Sizing reference	BMH0703T
Network number of phases	3
Accuracy error [angular]	4.8 °
Temperature copper hot	135 °C
Temperature magnet hot	100 °C
Temperature magnet rt	20 °C

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.0 cm
Package 1 Width	20.0 cm
Package 1 Length	40.0 cm
Package 1 Weight	2.2 kg
Unit Type of Package 2	P06
Number of Units in Package 2	36
Package 2 Height	105.0 cm

Package 2 Width	80.0 cm	
Package 2 Length	60.0 cm	
Package 2 Weight	86.2 kg	

## **Contractual warranty**

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

∇ Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	995
Environmental Disclosure	Product Environmental Profile

#### **Use Better**

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	A7df881f-135f-4256-b8c2-ea55d4c9a151
REACh Regulation	REACh Declaration
PVC free	Yes

#### Use Again


○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## BMH0703T17A2A

#### **Dimensions Drawings**

#### **Servo Motors Dimensions**

#### **Example with Straight Connectors**

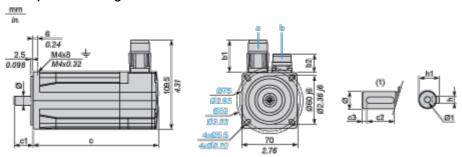

- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder
- (1) Shaft end, keyed slot (optional)

#### Dimensions in mm

Straight Rotatable angled connectors connectors		c (without c (with		c1 c	c2	сЗ	h	h1	Ø	Ø1 for			
b1	b2	b1	b2	brake)	brake) brake)							screws	
39.5	25.5	39.5	39.5	186	225	30	20	5	5 h9	16 <sup>+0</sup> _ 0.13	14 k6	M5 x 17	

#### Dimensions in in.

_	Straight connectors		connectors		c (with brake)	c1	c2	с3	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2	brake)								
1.55	1	1.55	1.55	7.32	8.85	1.18	0.78	0.19	0.20 h9	0.63 <sup>+0</sup> _ 0.0051	0.55 k6	M5 x 0.67

## **Product datasheet**


## BMH0703T17A2A

#### Performance Curves

### 115 V Single-Phase Supply Voltage

#### **Torque/Speed Curves**

Servo motor with LXM32•D30M2 servo drive




- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

#### 230 V Single-Phase Supply Voltage

#### **Torque/Speed Curves**

Servo motor with LXM32•D18M2 servo drive



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque