



BAS19 / BAS20 / BAS21

SURFACE MOUNT FAST SWITCHING DIODE

Features


- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automated Insertion
- For General Purpose Switching Applications
- High Conductance
- Lead, Halogen and Antimony Free, RoHS Compliant "Green" Device (Notes 3 and 4)
- Qualified to AEC-Q101 Standards for High Reliability

Mechanical Data

- Case: SOT-23
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Polarity: See Diagram
- BAS19 Marking: KA8, KT3; KT2 See Page 2
- BAS20 Marking: KT2, KT3 See Page 2
- BAS21 Marking: KT3 See Page 2
- Ordering Information: See Page 2
- Weight: 0.008 grams (approximate)

SOT-23





Maximum Ratings $@T_A = 25^{\circ}C$ unless otherwise specified

Characteristic			BAS19	BAS20	BAS21	Unit
Repetitive Peak Reverse Voltage			120	200	250	V
Working Peak Reverse Voltage DC Blocking Voltage			100	150	200	V
RMS Reverse Voltage			71	106	141	V
Forward Continuous Current (Note 1)				400		mA
Average Rectified Output Current (Note 1)			200			mA
Non-Repetitive Peak Forward Surge Current	@ t = 1.0μs @ t = 1.0s	I _{FSM}	2.5 0.5			А
Repetitive Peak Forward Surge Current (Note 1)	IFRM	625			mA	

Thermal Characteristics

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 1)	PD	250	mW
Thermal Resistance Junction to Ambient Air (Note 1)	R _{θJA}	500	°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150	°C

Electrical Characteristics @T_A = 25°C unless otherwise specified

Characteristic			Min	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)	BAS19 BAS20 BAS21	V _{(BR)R}	120 200 250	_	V	I _R = 100μA
Forward Voltage		V _F	_	1.0 1.25	V	$I_F = 100 \text{mA}$ $I_F = 200 \text{mA}$
Reverse Current @ Rated DC Blocking Voltage (I _R	_	100 15	nA μA	$T_{J} = 25^{\circ}C$ $T_{J} = 100^{\circ}C$	
Total Capacitance		CT	_	5.0	pF	V _R = 0, f = 1.0MHz
Reverse Recovery Time	t _{rr}		50	ns	$I_F = I_R = 30 \text{mA},$ $I_{rr} = 0.1 \times I_R, R_L = 100 \Omega$	

Notes: 1. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.


2. Short duration pulse test used to minimize self-heating effect.

3. No purposefully added lead. Halogen and Antimony Free.

4. Product manufactured with Data Čode V9 (week 33, 2008) and newer are built with Green Molding Compound. Product manufactured prior to Date Code V9 are built with Non-Green Molding Compound and may contain Halogens or Sb₂O₃ Fire Retardants.





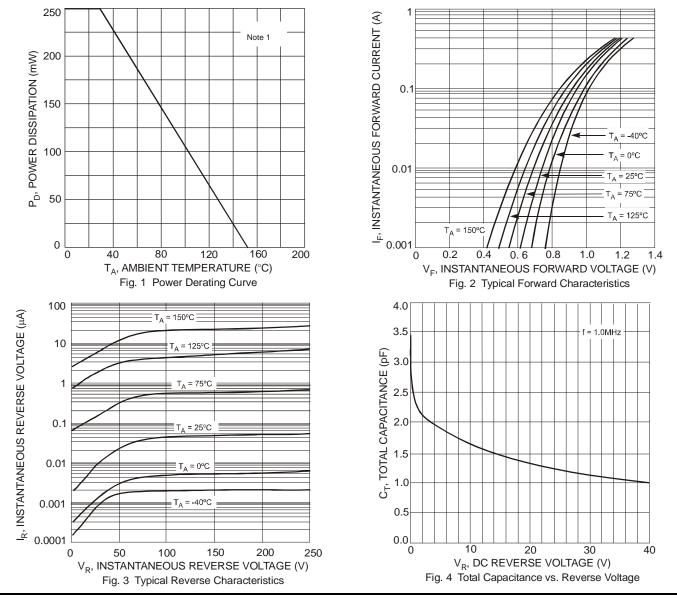


Ordering Information (Note 5)

Part Number	Case	Packaging
BAS19-7-F	SOT-23	3000/Tape & Reel
BAS20-7-F	SOT-23	3000/Tape & Reel
BAS21-7-F	SOT-23	3000/Tape & Reel

Notes:

5. For packaging details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

Marking Information




KXX = Product Type Marking Code (See Page 1) YM = Date Code Marking Y = Year ex: N = 2002

M = Month ex: 9 = September

Year	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	L	М	Ν	Р	R	S	Т	U	V	W	Х	Y	Z
Month	Jan	Feb	Mar	Apr	r Ma	y J	un	Jul	Aug	Sep	Oct	Nov	Dec
Code		•			-		~	-	0	•	0		-




Package Outline Dimensions

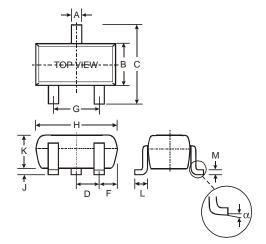

	SOT-23					
Dim	Min	Max				
Α	0.37	0.51				
В	1.20 1.40					
С	2.30 2.50					
D	0.89	1.03				
F	0.45	0.60				
G	1.78	2.05				
Н	2.80	3.00				
J	0.013 0.10					
Κ	0.903	1.10				
L	0.45	0.61				
М	0.085	0.180				
α	0°	8°				
All Dir	nensions	in mm				

Suggested Pad Layout



Dimensions	Value (in mm)
Z	2.9
Х	0.8
Y	0.9
С	2.0
E	1.35

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.