

SM-5ES1N8AYW00S - Device connector front mounting with knurled nut



1613525

<https://www.phoenixcontact.com/gb/products/1613525>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting with knurled nut, angled fixed, SPEEDCON, M40, number of positions: 2+3+PE, contact connection type: Socket, Axial O-ring, 4x Ø4,2, shielded: yes, flange dimensions: 40 mm x 40 mm, number of positions: 6, connection method: Crimp connection, series: SM

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1613525 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | ABRBGO |
| Product key | ABRBGO |
| Catalog page | Page 167 (C-2-2019) |
| GTIN | 4046356400831 |
| Weight per piece (including packing) | 598 g |
| Weight per piece (excluding packing) | 532.2 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

SM-5ES1N8AYW00S - Device connector front mounting with knurled nut



1613525

<https://www.phoenixcontact.com/gb/products/1613525>

Technical data

Notes

| | |
|--------------------|--|
| Order information: | Order crimp contacts 2 x Ø 2 mm, 4 x Ø 3.6 mm separately |
| Safety note | |
| Safety note | <p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none">• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.• The products are suitable for applications in plant, controller, and electrical device engineering.• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.• Assembled products may not be manipulated or improperly opened.• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).• When using the product in direct connection with third-party manufacturers, the user is responsible.• For operating voltages > 50 V AC, conductive connector housings must be grounded• Ensure that the protective or functional ground has been properly connected.• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector• Only use tools recommended by Phoenix Contact• The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.• Operate the connector only when it is fully plugged in and interlocked.• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.• Observe the minimum bending radius of the cable. Lay the cable without twisting it.• The connector warms up in normal operation. Depending on the |

SM-5ES1N8AYW00S - Device connector front mounting with knurled nut



1613525

<https://www.phoenixcontact.com/gb/products/1613525>

ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Mounting

| | |
|---------------|----------------|
| Mounting type | Front mounting |
| Mounting | 4x Ø4,2 |

Product properties

| | |
|---------------------|-----------------------------------|
| Product type | Circular connectors (device side) |
| Series | SM |
| Application | Power |
| Number of positions | 6 |
| Connection profile | 2+3+PE |
| Shielded | yes |
| Coding | N |
| Thread type | M40 |

Data management status

| | |
|------------------|----|
| Article revision | 10 |
|------------------|----|

Dimensions

Housing

| | |
|-------------------|---------------|
| Flange dimensions | 40 mm x 40 mm |
|-------------------|---------------|

Material specifications

| | |
|----------------------------|--|
| Seal material | FPM |
| Housing material | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Insulator material | PA 6.6 |
| Gasket and O-ring material | FPM |

Electrical properties

Contact

| | |
|-----------------------|--------|
| Contact diameter | 3.6 mm |
| Max. current | 70 A |
| Nominal voltage U_N | 630 V |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Rated surge voltage | 6 kV |

Contact

| | |
|------------------|------|
| Contact diameter | 2 mm |
| Max. current | 30 A |

SM-5ES1N8AYW00S - Device connector front mounting with knurled nut



1613525

<https://www.phoenixcontact.com/gb/products/1613525>

| | |
|--------------------------------|-------|
| Nominal voltage U _N | 250 V |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Rated surge voltage | 4 kV |

Connection data

Conductor connection

| | |
|-------------------------|------------------|
| Connection method | Crimp connection |
| Contact connection type | Socket |

Connector

| | |
|------|--------------|
| Type | angled fixed |
|------|--------------|

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|-------------------|
| Degree of protection | IP67 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Altitude | 3000 m |


SM-5ES1N8AYW00S - Device connector front mounting with knurled nut

1613525

<https://www.phoenixcontact.com/gb/products/1613525>

Drawings

Dimensional drawing

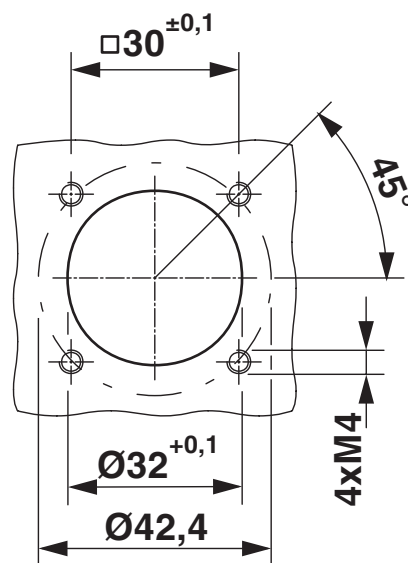

Installation dimensions


SM-5ES1N8AYW00S - Device connector front mounting with knurled nut



1613525

<https://www.phoenixcontact.com/gb/products/1613525>

Dimensional drawing

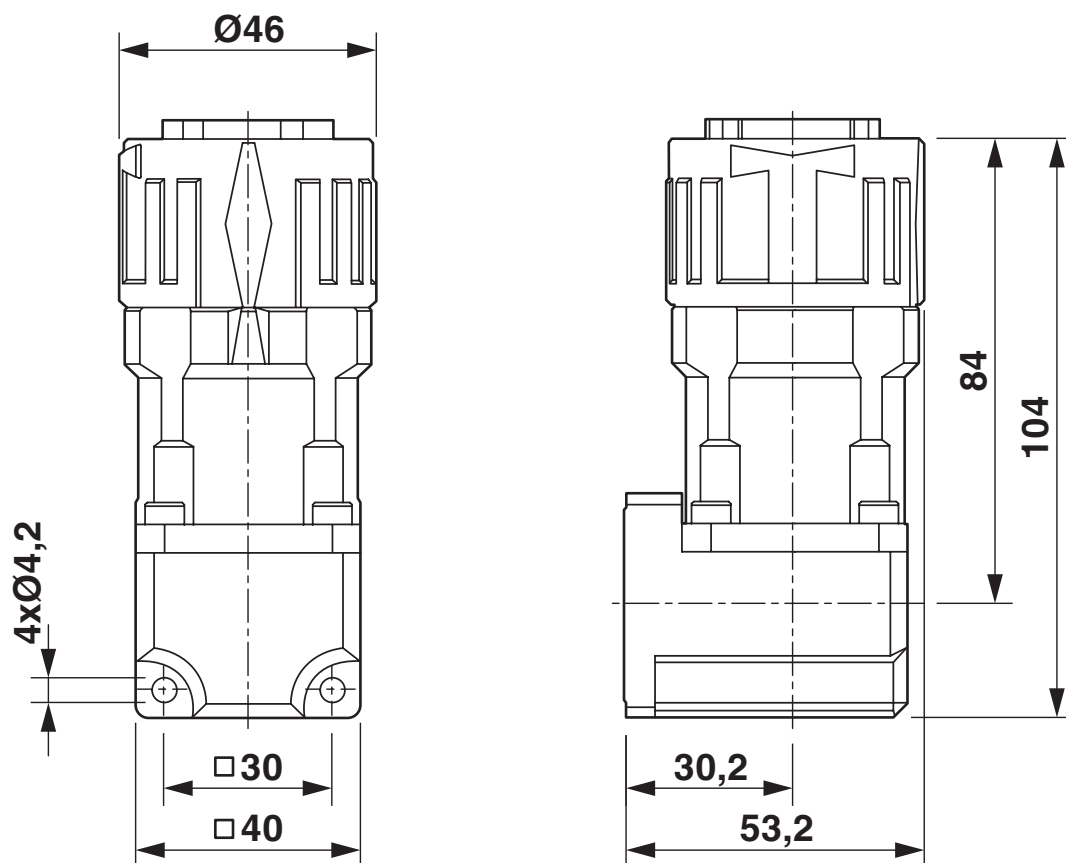


Dimensional drawing

SM-5ES1N8AYW00S - Device connector front mounting with knurled nut

1613525

<https://www.phoenixcontact.com/gb/products/1613525>

Schematic diagram

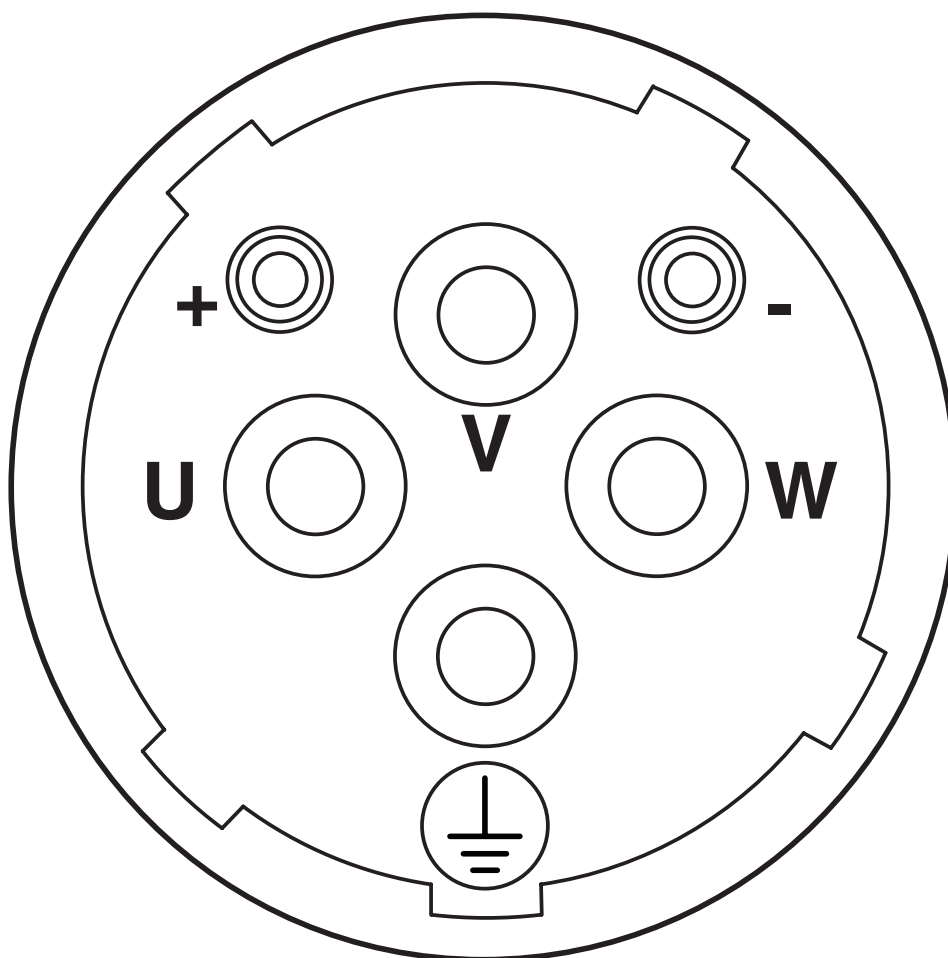


Connector pin assignment

SM-5ES1N8AYW00S - Device connector front mounting with knurled nut

1613525

<https://www.phoenixcontact.com/gb/products/1613525>

Diagram

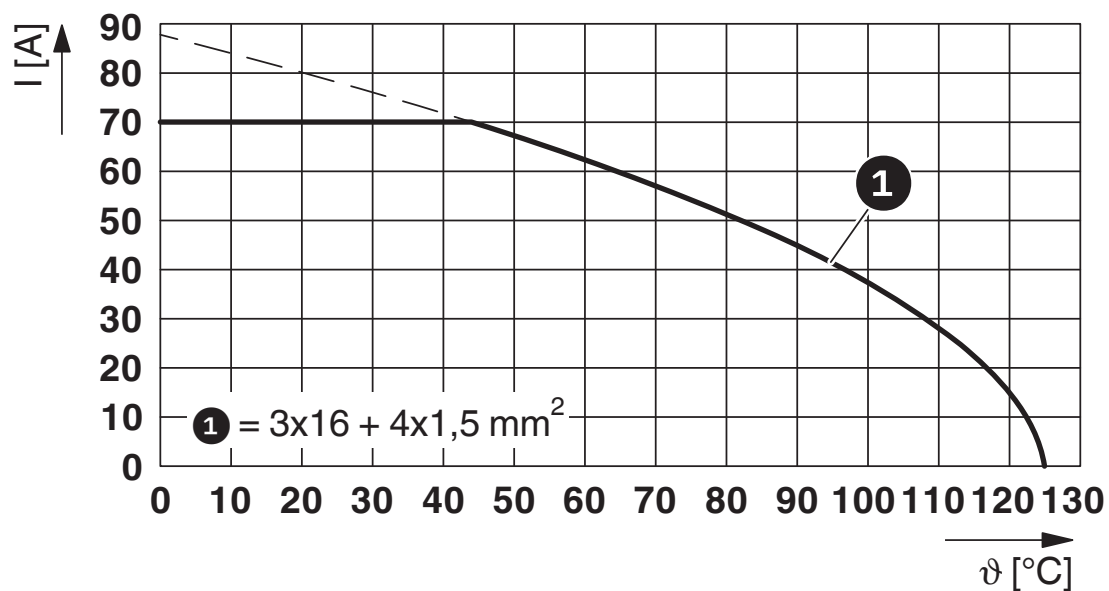

I = current strength, T = ambient temperature


SM-5ES1N8AYW00S - Device connector front mounting with knurled nut




1613525
<https://www.phoenixcontact.com/gb/products/1613525>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/1613525>

| <div> cUL Recognized Approval ID: E153698-20150903</div> | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Power | 600 V | 40 A | - | - |
| Signal | 600 V | 20 A | - | - |

| <div> UL Recognized Approval ID: E153698-20150903</div> | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Power | 600 V | 65 A | - | - |
| Signal | 600 V | 30 A | - | - |

| | | | | |
|------------------|--|--|--|--|
| cULus Recognized | | | | |
|------------------|--|--|--|--|

SM-5ES1N8AYW00S - Device connector front mounting with knurled nut



1613525
<https://www.phoenixcontact.com/gb/products/1613525>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440102 |
| ECLASS-12.0 | 27440116 |
| ECLASS-13.0 | 27440116 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC002635 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

1613525
<https://www.phoenixcontact.com/gb/products/1613525>

Environmental product compliance

| | |
|---|---|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | fdad91aa-ed2b-4032-8d9f-7cb346a81fe7 |

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk