



**Variable Frequency Drive, 3~/3~ 400 V, 18 A, 7.5 kW, EMC-Filter, Brake-Chopper**

**Part no.** DC1-34018FB-A20N  
**Article no.** 169493  
**Catalog No.** DC1-34018FB-A20N

## Delivery programme

Product range			PowerXL™ DC1 variable frequency drives
Rated operational voltage	$U_e$		400 V AC, 3-phase
Output voltage with $V_e$	$U_2$		400 V AC, 3-phase
Mains voltage (50/60Hz)	$U_{LN}$	V	380 (-10%) - 480 (+10%)
<b>Rated operational current</b>			
At 150% overload	$I_e$	A	18
Note			Rated operational current at an operating frequency of 16 kHz and an ambient air temperature of +50 °C
Note			Overload cycle for 60 s every 600 s
<b>Assigned motor rating</b>			
Note			for normal internally and externally ventilated 4 pole, three-phase asynchronous motors with $1500 \text{ rpm}^{-1}$ at 50 Hz or $1800 \text{ min}^{-1}$ at 60 Hz
Note			Overload cycle for 60 s every 600 s
Note			at 400 V, 50 Hz
150 % Overload	P	kW	7.5
150 % Overload	$I_e$	A	15.2
Note			at 440 - 480 V, 60 Hz
150 % Overload	P	HP	10
150 % Overload	$I_e$	A	14
Degree of Protection			IP20/NEMA 0
Interface/field bus (built-in)			OP-Bus (RS485)/Modbus RTU, CANopen®
Fieldbus connection (optional)			SmartWire-DT
Fitted with			Radio interference suppression filter Brake chopper 7-digital display assembly
Frame size			FS3
Connection to SmartWire-DT			with SmartWire-DT module DX-NET-SWD3

## Technical data

<b>General</b>			
Standards			Specification for general requirements: IEC/EN 61800-2 EMC requirements: IEC/EN 61800-3 Safety requirements: IEC/EN 61800-5-1
Certifications			CE, cUL, UL, c-Tick, Ukr Sepro, EAC
Production quality			RoHS, ISO 9001
Climatic proofing	$\rho_w$	%	< 95%, average relative humidity (RH), non-condensing, non-corrosive (EN 50178)
Ambient temperature		°C	
operation (150 % overload)	$\theta$	°C	-10 - +50
Storage	$\theta$	°C	-40 - +60
Radio interference level			
Radio interference class (EMC)			C1, C2, C3, depending on the motor cable length, the connected load, and ambient conditions. External radio interference suppression filters (optional) may be necessary.
Environment (EMC)			1st and 2nd environments
maximum motor cable length	l	m	C1 ≤ 1 m C2 ≤ 5 m C3 ≤ 25 m
Mounting position			Vertical
Altitude		m	0 - 1000 m above sea level

				above 1000 m with 1 % performance reduction per 100 m max. 4000 m
Degree of Protection				IP20/NEMA 0
Protection against direct contact				BGV A3 (VBG4, finger- and back-of-hand proof)
<b>Main circuit</b>				
<b>Supply</b>				
Rated operational voltage	$U_e$			400 V AC, 3-phase
Mains voltage (50/60Hz)	$U_{LN}$	V		380 (-10%) - 480 (+10%)
Input current (150% overload)	$I_{LN}$	A		18.1
System configuration				AC supply systems with earthed center point
Supply frequency	$f_{LN}$	Hz		50/60
Frequency range	$f_{LN}$	Hz		48 - 62
Mains switch-on frequency				Maximum of one time every 30 seconds
<b>Power section</b>				
Function				Frequency inverter with internal DC link and IGBT inverter
Overload current (150% overload)	$I_L$	A		27
max. starting current (High Overload)	$I_H$	%		175
Note about max. starting current				for 2 seconds every 20 seconds
Output voltage with $V_e$	$U_2$			400 V AC, 3-phase
Output Frequency	$f_2$	Hz		0 - 50/60 (max. 500)
Switching frequency	$f_{PWM}$	kHz		8 adjustable 4 - 24 (audible)
Operation Mode				U/f control Speed control with slip compensation
Frequency resolution (setpoint value)	$\Delta f$	Hz		0.1
Rated operational current				
At 150% overload	$I_e$	A		18
Note				Rated operational current at an operating frequency of 16 kHz and an ambient air temperature of +50 °C
<b>Power loss</b>				
Heat dissipation at rated operational current	$P_V$	W		300
Efficiency	$\eta$	%		97
Maximum leakage current to ground (PE) without motor	$I_{PE}$	mA		< 1
Fitted with				Radio interference suppression filter Brake chopper 7-digital display assembly
Frame size				FS3
<b>Motor feeder</b>				
Note				for normal internally and externally ventilated 4 pole, three-phase asynchronous motors with $1500 \text{ rpm}^{-1}$ at 50 Hz or $1800 \text{ min}^{-1}$ at 60 Hz
Note				Overload cycle for 60 s every 600 s
Note				at 400 V, 50 Hz
150 % Overload	P	kW		7.5
Note				at 440 - 480 V, 60 Hz
150 % Overload	P	HP		10
maximum permissible cable length	l	m		screened: 100 screened, with motor choke: 200 unscreened: 150 unscreened, with motor choke: 300
<b>Apparent power</b>				
Apparent power at rated operation 400 V	S	kVA		12.47
Apparent power at rated operation 480 V	S	kVA		14.96
<b>Braking function</b>				
Standard braking torque				max. 30 % $M_N$
DC braking torque				100 %, adjustable
Braking torque with external braking resistance				max. 100% rated operational current $I_e$ , with external braking resistance
minimum external braking resistance	$R_{min}$	$\Omega$		47
Switch-on threshold for the braking transistor	$U_{DC}$	V		780 V DC

## Control section

Reference voltage	U <sub>s</sub>	V	10 V DC (max. 10 mA)
Analog inputs			2, parameterizable, 0 - 10 V DC, 0/4 - 20 mA
Analog outputs			1, parameterizable, 0 - 10 V
Digital inputs			4, parameterizable, max. 30 V DC
Digital outputs			1, parameterizable, 24 V DC
Relay outputs			1, parameterizable, N/O, 6 A (250 V, AC-1) / 5 A (30 V, DC-1)
Interface/field bus (built-in)			OP-Bus (RS485)/Modbus RTU, CANopen®

## Assigned switching and protective elements

Power Wiring			
IEC (Typ B, gG)			FAZ-B25/3
UL (Class CC or J)		A	25
150 % overload (CT/I <sub>H</sub> , at 50 °C)			DX-LN3-025
Motor feeder			
150 % overload (CT/I <sub>H</sub> , at 50 °C)			DX-LM3-035
150 % overload (CT/I <sub>H</sub> , at 50 °C)			DX-SIN3-023
10 % duty factor (DF)			DX-BR047-3K1
20 % duty factor (DF)			DX-BR047-5K1
40 % duty factor (DF)			DX-BR047-9K2

## Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I <sub>n</sub>	A	18
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	300
Operating ambient temperature min.		°C	-10
Operating ambient temperature max.		°C	50
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			
			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			
			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			
			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			
			Meets the product standard's requirements.
10.2.5 Lifting			
			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			
			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			
			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			
			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			
			Meets the product standard's requirements.
10.5 Protection against electric shock			
			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			
			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			
			Is the panel builder's responsibility.
10.8 Connections for external conductors			
			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			
			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			
			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			
			Is the panel builder's responsibility.
10.10 Temperature rise			
			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			
			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			
			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			
			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 5.0


Mains voltage	V	380 - 480
Mains frequency		50/60 Hz
Number of phases input		3
Number of phases output		3
Max. output frequency	Hz	500
Rated output voltage	V	400
Measuring output current	A	18
Output power at rated output voltage	kW	7.5
Max. output at quadratic load at rated output voltage	kW	7.5
Max. output at linear load at rated output voltage	kW	7.5
With control unit		Yes
Application in industrial area permitted		Yes
Application in domestic- and commercial area permitted		Yes
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		Yes
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for KNX		No
Supporting protocol for MODBUS		Yes
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		No
Number of HW-interfaces industrial Ethernet		0
Number of HW-interfaces PROFINET		0
Number of HW-interfaces RS-232		0
Number of HW-interfaces RS-422		0
Number of HW-interfaces RS-485		1
Number of HW-interfaces serial TTY		0
Number of HW-interfaces USB		1
Number of HW-interfaces parallel		0
Number of HW-interfaces other		0
With optical interface		No
With PC connection		Yes
Integrated braking resistance		Yes
4-quadrant operation possible		No
Type of converter		U converter
Degree of protection (IP)		IP20
Height	mm	273
Width	mm	131
Depth	mm	175

Relative symmetric net frequency tolerance	%	5
Relative symmetric net current tolerance	%	10

## Approvals

Product Standards		UL 508C; CSA-C22.2 No. 14; IEC/EN61800-3; IEC/EN61800-5; CE marking
UL File No.		E172143
UL Category Control No.		NMMS, NMMS7
CSA File No.		UL report applies to both US and Canada
North America Certification		UL listed, certified by UL for use in Canada
Specially designed for North America		No
Suitable for		Branch circuits
Max. Voltage Rating		3~ 480 V AC IEC: TN-S UL/CSA: "Y" (Solidly Grounded Wey)
Degree of Protection		IEC: IP20

## Dimensions

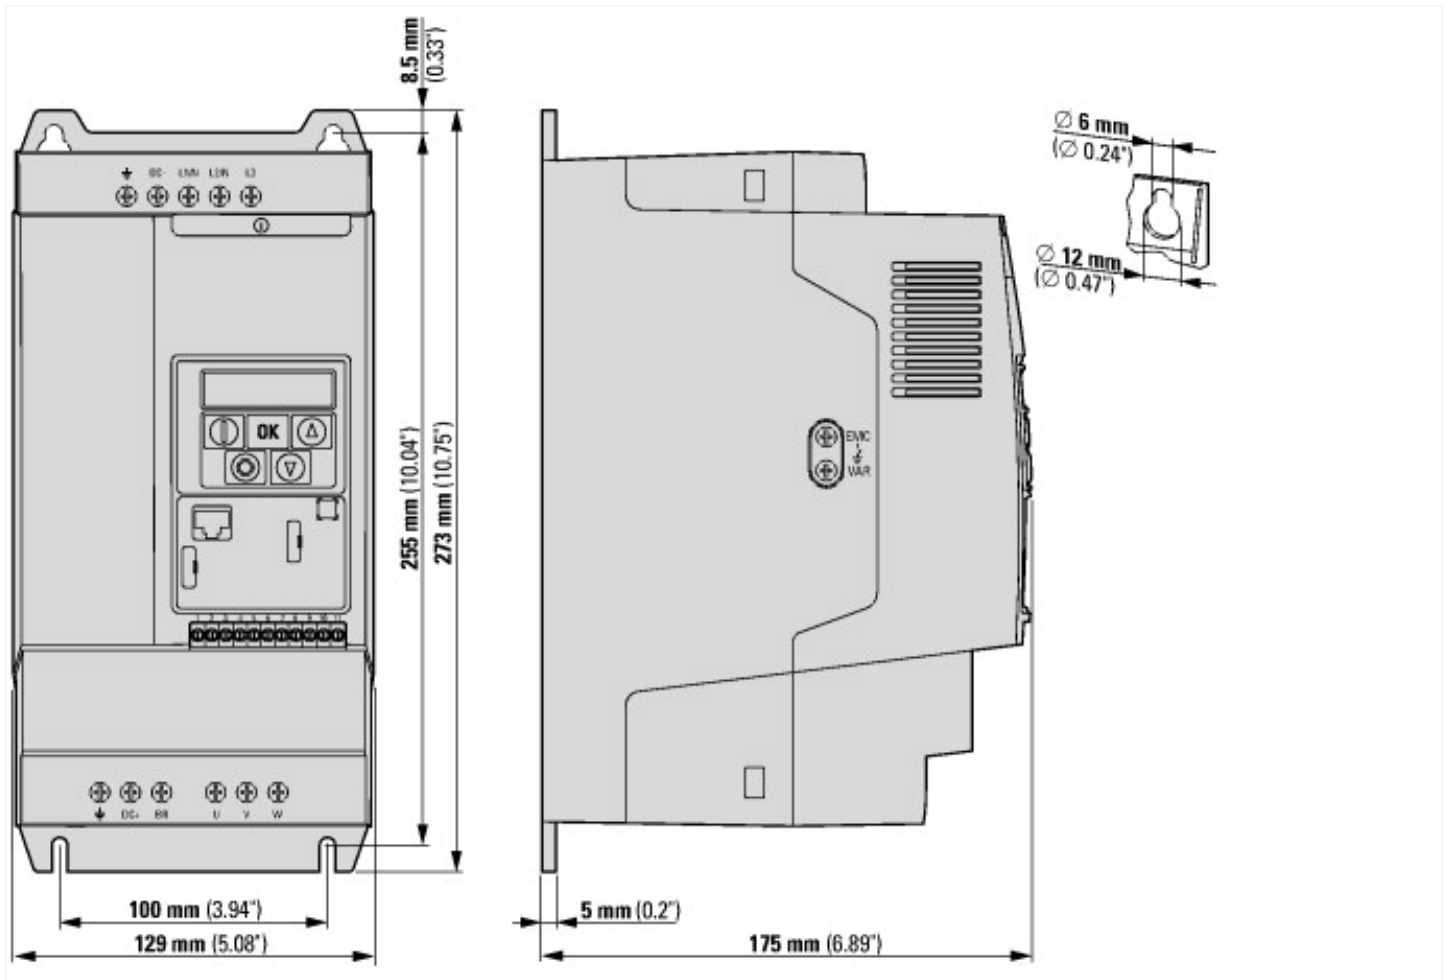

## Additional product information (links)

### IL04020009Z DC1 variable frequency drives (FS1 - FS3, IP20)

IL04020009Z DC1 variable frequency drives (FS1 - FS3, IP20) [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL04020009Z2012\\_10.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04020009Z2012_10.pdf)

### MN04020003Z DC1 variable frequency drive, manual

MN04020003Z Frequenzumrichter DC1, Handbuch - Deutsch [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN04020003Z\\_DE.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN04020003Z_DE.pdf)

MN04020003Z DC1 variable frequency drive, manual - English [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN04020003Z\\_EN.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN04020003Z_EN.pdf)

MN04020003Z Frekvenční měnič DC1, manuál - čeština [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN04020003Z\\_CZ.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN04020003Z_CZ.pdf)

MN04020003Z Convertitori di frequenza DC1, manuale - italiano [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN04020003Z\\_IT.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN04020003Z_IT.pdf)

CA04020001Z\_EN-INT Product range catalog: Efficient Engineering for starting and controlling motors. [http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_1095238.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1095238.pdf)

