

Make the impossible possible with Super Power of 300 W Heater.

FX-801 can provide tremendous heating performance with super power 300 W composite heater.

Check out the powerful performance of FX-801 easily melting a bar solder.
http://www.hakko.com/mov_e_fx801_feature1



QR code



● Compact and lightweight (50 g) for heavy duty 300 W iron

The same weight as the iron part of FX-838, 150 W soldering station, for operator's comfort and better workability.

● Easy tip replacement

The composite tip makes tip replacement easy.

● Auto Sleep/Auto Shut-off function

Safety design automatically enters sleep/shut-off function when iron is placed in iron holder. The function automatically cools down tip temperature and shut-off power when not in use for a certain period of time.

● Compatible with N₂ System (Option)

Replacing an iron part (FX-8002) with an optional N₂ iron part (FX-8003), it enables use of N₂ system.

*Appropriate option nozzle assemblies for each tip shape are necessary.

● Handles on unit body

Handles on unit body make it easy to carry.

● Large LED display

An LED display roughly double the size of a previous model is very easy to see.

● Password function

Settings can be locked from unnecessary changes by password function.

A b C d E F


Selectable alphabets for password

● Preset mode


Up to 6 settings can be preset and easily called up by Up/Down buttons.




Replacement Tips

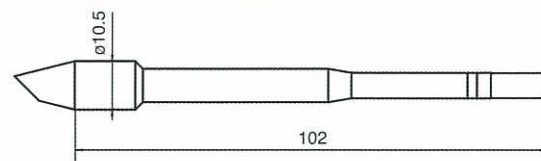


T33-BC2 Shape 2BC




T33-BC3 Shape 3BC




T33-BC4 Shape 4BC




T33-BC5 Shape 5BC




T33-BC2 Shape 6BC




T33-D24 Shape 2.4D




T33-D32 Shape 3.2D



T33-D5 Shape 5D




T33-D6 Shape 6D



FX-801

Packing list

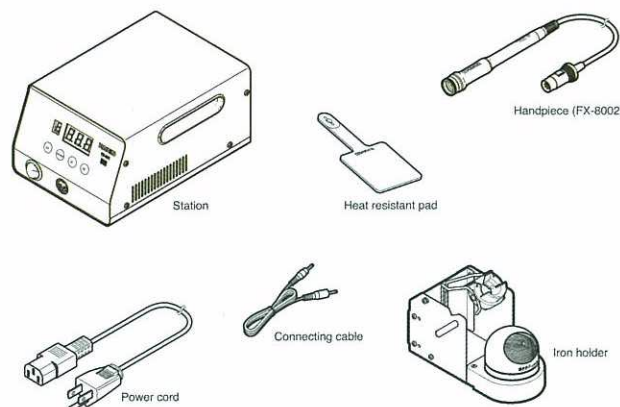

*Tips are sold separately

Station, Handpiece (FX-8002), Heat resistant pad, Power cord, Connecting cable, Iron holder (with cleaning wire), Instruction manual

Specifications

Power consumption	300 W
Temperature range	50 to 500°C
Temperature stability	±5°C at idle temperature
Station	
Output voltage	AC 29 V
Dimensions	145 (W)×107 (H)×211 (D) mm
Weight	3.9 kg
Soldering Iron	
Power consumption	260 W (29 V)
Tip to ground resistance	<2 Ω
Tip to ground potential	<2 mV
Heating element	Composite heater
Cord length	1.2 m
Total length (without cord)	228 mm (with 4BC tip)
Weight (without cord)	50 g (with 4BC tip)



Soldering Iron

Station Type
Heavy Duty Soldering Iron

HAKKO FX-801 ESD SAFE
SOLDERING STATION

Go Beyond the Limits! Super Power 300 Watts to Change the World of Soldering



HAKKO
HAKKO CORPORATION
OVERSEAS AFFILIATES

U.S.A.
AMERICAN HAKKO PRODUCTS, INC.
28920 AVENUE WILLIAMS VALENCIA, CA 91355, U.S.A.
TEL: (661) 294-0090 FAX: (661) 294-0096
Toll Free (800)88-HAKKO
http://www.hakkousa.com

HEAD OFFICE
4-5, SHIOKUSA 2-CHOME, NANIWA-KU, OSAKA, 556-0024 JAPAN
TEL:+81-6-6561-3225 FAX:+81-6-6561-8466
http://www.hakko.com E-mail:sales@hakko.com

HONG KONG
HAKKO DEVELOPMENT CO., LTD.
ROOM 1504, EASTERN HARBOUR CENTRE,
28 HOI CHAK STREET, QUARRY BAY, HONG KONG.
TEL: 2811-5588 FAX: 2590-0217
http://www.hakko.com.hk
E-mail:info@hakko.com.hk

SINGAPORE
HAKKO PRODUCTS PTE LTD
1, GENTING LINK #02-04
PERFECT ONE, SINGAPORE 349518
TEL: 6748-2277 FAX: 6744-0033
http://www.hakko.com.sg
E-mail:sales@hakko.com.sg

Please access to the following for the other Sales affiliates.
<http://www.hakko.com>

Specifications and design are subject to change without notice. Copyright HAKKO Corporation. All right reserved.

CA00461EbYa002 2015.2